


## w15-p3: Get drink info based on data-id, and show the data

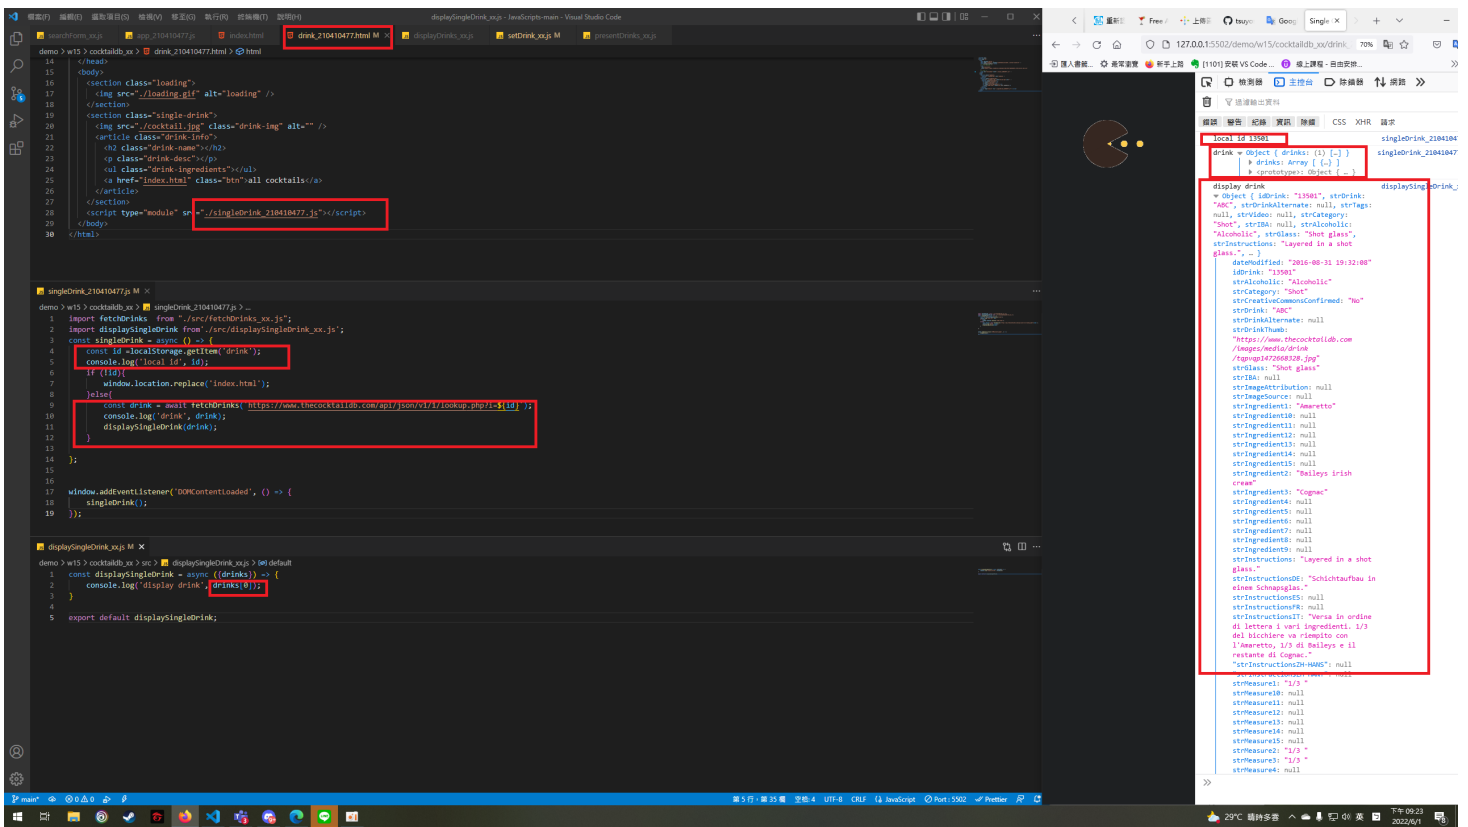

last log 還有我濫用-f 把 P1 的 log 給砍了 時間大概在 20:00

```
git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2022-05-31"
```

```
457cb2a tsuyosoudesu Wed Jun 1 21:44:18 2022 +0800 w15-p3: Get drink info based on data-id, and show the data
5d681cc tsuyosoudesu Wed Jun 1 20:35:14 2022 +0800 w15-p2: Get data-id of a drink, save to local storage
```

```
User@DESKTOP-47KKICG MINGW64 ~/Desktop/JavaScripts-main (main)
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2022-05-31"
457cb2a tsuyosoudesu Wed Jun 1 21:44:18 2022 +0800 w15-p3: Get drink info based on data-id, and show the data
5d681cc tsuyosoudesu Wed Jun 1 20:35:14 2022 +0800 w15-p2: Get data-id of a drink, save to local storage
```

```
User@DESKTOP-47KKICG MINGW64 ~/Desktop/JavaScripts-main (master)
$ git commit -m "w15-p1: finish search form"
[master (root-commit) 9c8d87d] w15-p1: finish search form
167 files changed, 5398 insertions(+)
create mode 100644 .vscode/settings.json
create mode 100644 README.md
create mode 100644 demo/MD/w01/w01.png
create mode 100644 demo/MD/w02/w02.png
create mode 100644 demo/MD/w03/w03.png
create mode 100644 demo/MD/w04/w04-1.png
create mode 100644 demo/MD/w04/w04-2.png
create mode 100644 demo/MD/w05/w05.png
create mode 100644 demo/MD/w06/w06-1.png
create mode 100644 demo/MD/w06/w06-2.png
create mode 100644 demo/MD/w08/w08.md
create mode 100644 demo/MD/w08/w08.pdf
create mode 100644 demo/w01/210410477.pdf
create mode 100644 "demo/w01/210410477\347\254\254\344\272\214\346\254\241\350\252\262\345\240\202.md"
create mode 100644 demo/w01/tictactoe.JPG
create mode 100644 demo/w01/tictactoe_210410477.css
create mode 100644 demo/w01/tictactoe_210410477.html
create mode 100644 demo/w01/tictactoe_210410477.js
create mode 100644 demo/w02/W02.md
create mode 100644 demo/w02/W02.pdf
```

問題 輸出 偵察主控台 終端機

```
User@DESKTOP-47KKICG MINGW64 ~/Desktop/JavaScripts-main (main)
$ git remote add origin https://github.com/tsuyosoudesu/JavaScripts.git

User@DESKTOP-47KKICG MINGW64 ~/Desktop/JavaScripts-main (main)
$ git push -u origin main
To https://github.com/tsuyosoudesu/JavaScripts.git
 ! [rejected]        main -> main (fetch first)
error: failed to push some refs to 'https://github.com/tsuyosoudesu/JavaScripts.git'
hint: Updates were rejected because the remote contains work that you do
hint: not have locally. This is usually caused by another repository pushing
hint: to the same ref. You may want to first integrate the remote changes
hint: (e.g., 'git pull ...') before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

User@DESKTOP-47KKICG MINGW64 ~/Desktop/JavaScripts-main (main)
$ git push -f origin main
Enumerating objects: 178, done.
Counting objects: 100% (178/178), done.
Delta compression using up to 20 threads
Compressing objects: 100% (162/162), done.
Writing objects: 100% (178/178), 16.41 MiB | 4.65 MiB/s, done.
Total 178 (delta 27), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (27/27), done.
To https://github.com/tsuyosoudesu/JavaScripts.git
+ dc44752...9c8d87d main -> main (forced update)
```