(a) a candidate account is a program

samurai bound · wife holds the dagger · longsword on the ground · rope binding
take seize give cut_rope
strike self_strike impale flee

τ — the same story, told with the dagger

- `flee(bandit)`
- `cut_rope(wife, dagger)`
- `strike(wife, dagger, → samurai)`
- terminal state

τ' — the same story, told with the longsword

- `flee(bandit)`
- `take(wife, longsword)`
- `cut_rope(wife, longsword)`
- `strike(wife, longsword, → samurai)`
- terminal state


(b) feasibility is replay, not judgement

does the terminal state match F?	τ	τ'
samurai dead — throat, dagger	✓	×
wife alive, in the grove	✓	✓
bandit gone	✓	✓
dagger bloodied	✓	×
longsword unbloodied	✓	×
rope cut	✓	✓

no language model, no scoring and no tunable threshold in this box
3,631 states → 350 resolved histories → 22 assertions → $|\text{Feasible}(F)| = 11$

(c) the objective is maximized over what survives

all 22 assertions, placed by what they are worth to the bandit, grouped by whom they blame

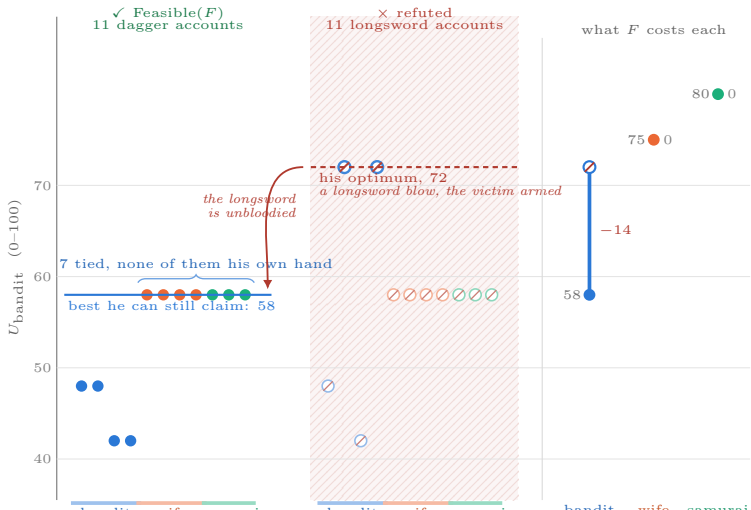

Owning the killing is worth at most **48** to him once F is in force: every surviving account that pays more puts the blade in somebody else's hand. Of the three agents, only his optimum is refuted.