

a.1

```
.fields .container ul li::after {
  content: '.';
  padding: 0 0 0 0.4rem;
  text-align: center;
  color: #a1a1a1;
}
```

- css: ::after 與 ::before 的使用

a.2

- { Switch, Route } from 'react-router-dom'連結

```


You, 6 minutes ago | 1 author (You)
1 import { Switch, Route } from 'react-router-dom';
2 import Homepage_85 from './pages/Hompage_85';
3 import Header_85 from './components/Header_85';
4 import Footer_85 from './components/Footer_85';
5 import Product_85 from './pages/ProductPage_85';
6 import CoffeePage_85 from './pages/CoffeePage_85';
7 import StorePage_85 from './pages/StorePage_85';
8 import StarCourtesyPage_85 from './pages/StarCourtesyPage_85';
9 import FourthSpacePage_85 from './pages/FourthSpacePage_85';
0 import GiftAreaPage_85 from './pages/GiftAreaPage_85';
1 import OnlineStorePage_85 from './pages/OnlineStorePage_85';
2 import './App_85.scss';
3
4
5 const App_85 = () => {
6   return (
7     <div>
8       <Header_85 />
9       <Switch>
10        <Route exact path="/" component={Homepage_85} />
11        <Route exact path="/CoffeePage_85" component={CoffeePage_85} />
12        <Route exact path="/Product_85" component={Product_85} />
13        <Route exact path="/StorePage_85" component={StorePage_85} />
14        <Route exact path="/StarCourtesyPage_85" component={StarCourtesyPage_85} />
15        <Route exact path="/FourthSpacePage_85" component={FourthSpacePage_85} />
16        <Route exact path="/GiftAreaPage_85" component={GiftAreaPage_85} />
17        <Route exact path="/OnlineStorePage_85" component={OnlineStorePage_85} />

```

a.3

- 產品頁拆分

product

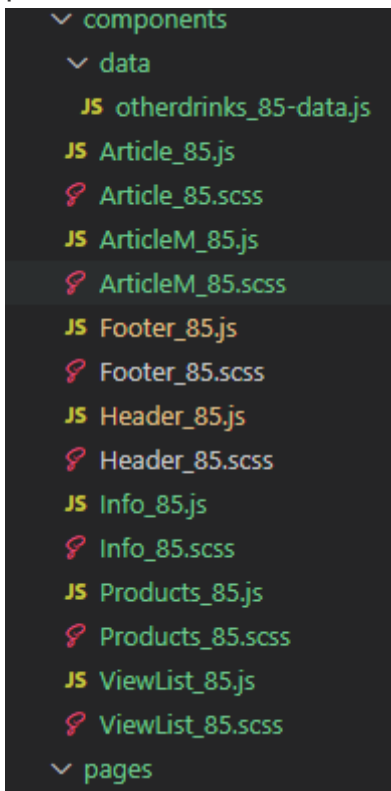

js

```
Products_85.js - web-mid-proje
... JS Products_85.js U X step4.md U JS Article_85.js U JS ArticleM_

src > components > JS Products_85.js > [e] Products_85
1  import React from 'react'
2  import './Products_85.scss';
3  import Article_85 from './Article_85';
4
5  const Products_85 = () => {
6      return(
7          <div class="wrap-coffee">
8              |      <Article_85 />
9              |      </div>
10         )
11     }
12
13
14
15  export default Products_85;
16
```

物件 js

```
ArticleM_85.js - web-mid-project_85 - Visual Studio Code
... JS Article_85.js U JS ArticleM_85.js U X ArticleM_85.js U ... JS Article_85.js U X

src > components > JS ArticleM_85.js > ...
1  import React from "react";
2  import './ArticleM_85.scss';
3
4  const ArticleM_85 = ({ name_cn, name_en, url }) => {
5
6      return (
7          <a href="#">
8              <div class="column-img">
9                  <img src={url} alt="" />
10             </div>
11             <div class="column-text">
12                 <h1 class="title-cn">{name_cn}</h1>
13                 <h3 class="title-en">{name_en}</h3>
14             </div>
15         </a>
16     )
17 }
18
19 export default ArticleM_85;

src > components > JS Article_85.js > [e] Article_85 > [e] menuItems.map() callback
1  import React, { useState } from 'react';
2  import './Article_85.scss';
3  import ViewList_85 from './ViewList_85';
4  import items from './data/otherdrinks_85-data'
5  import ArticleM_85 from './ArticleM_85';
6
7  const Article_85 = () => {
8      const [menuItems, setMenuItems] = useState(items);
9      console.log('menuItems', menuItems);
10     return (
11         <div>
12             <div class="coffee-content">
13                 <ViewList_85 />
14                 <div class="article">
15                     <h2>其他飲料系列</h2>
16                     <ul>
17                         <li>
18                             {menuItems.map(item => {
19                                 const { name_cn, name_en, url } = item;
20                                 return (
21                                     <ArticleM_85 name_cn={name_cn} name_en={name_en}
22                                     href={url} />
23                                 )
24                             })}
25                     </li>
26                 </div>
27             </div>
28         </div>
29     )
30 }
```

問題 6 輸出 偵錯主控台 終端機

Line 25:29: The href attribute requires a valid value to be accessible. Provide a valid, navigable address as the href value. If you cannot provide a valid href, but still need the element to resemble a link, use a button and change it with appropriate styles. Learn more: <https://github.com/jsx-eslint/eslint-plugin-jsx-a11y/blob/HEAD/docs/rules/anchor-is-valid.md> [jsx-a11y/anchor-is-valid](#)

Line 26:29: The href attribute requires a valid value to be accessible. Provide a valid, navigable address as the href value. If you cannot provide a valid href, but still need the element to resemble a link, use a button and change it with appropriate styles. Learn more: <https://github.com/jsx-eslint/eslint-plugin-jsx-a11y/blob/HEAD/docs/rules/anchor-is-valid.md> [jsx-a11y/anchor-is-valid](#)

