


How to Advance Tasks Efficiently

with kander

Author: dualface

What is kander?

- A task card system defined in Markdown.
- A rule-driven task orchestration system.
- Plus an easy-to-use TUI.

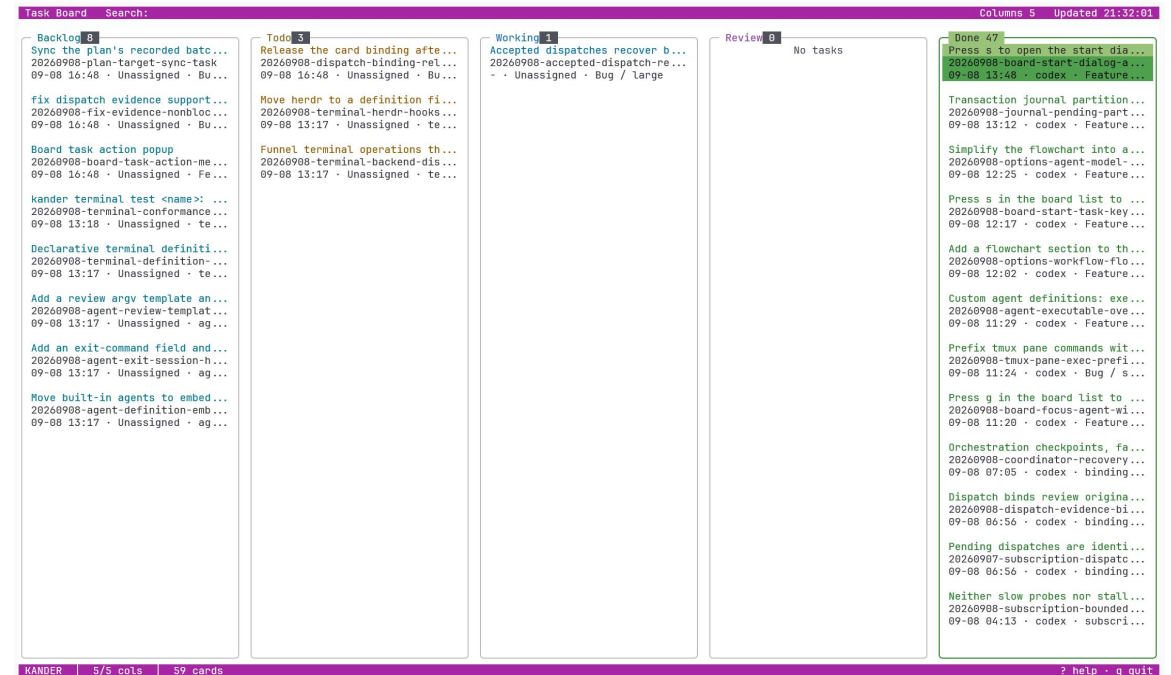

How to Install

- Download the latest release from <https://github.com/dualface/kander>
- Run `kander install`
- Run `kander init` in your project to create the `./kanban/` directory structure.

Where Do Task Cards Come From?

- The user discusses requirements with the Agent, or asks the Agent to look at a GitHub issue.
- The user and the Agent agree on the task to be done.
- The user asks the Agent to create a task card.

What's in a Task Card?

- Depending on task complexity, a task card consists of one or more Markdown files.
- All task cards are stored under the project's `./kanban/` directory.
- The Markdown contains everything needed to complete the task:
 - Task description
 - Task checklist
 - Acceptance checklist

How to Start a Task Card?

- The Agent usually asks proactively whether to start the task card.
- The user can also explicitly tell the Agent to start it.

How Is a Task Card Executed?

- Following the rules, the Agent runs kander start to launch an Agent that executes the task described in the card.
- The user can run kander to open the TUI and view the status of all tasks.

TUI

Task Board

Search:

Columns 5

Updated 21:32:01

Backlog 8

Sync the plan's recorded batc...
20260908-plan-target-sync-task
09-08 16:48 · Unassigned · Bu...

fix dispatch evidence support...
20260908-fix-evidence-nonbloc...
09-08 16:48 · Unassigned · Bu...

Board task action popup
20260908-board-task-action-me...
09-08 16:48 · Unassigned · Fe...

kander terminal test <name>: ...
20260908-terminal-conformance...
09-08 13:18 · Unassigned · te...

Declarative terminal definiti...
20260908-terminal-definition-...
09-08 13:17 · Unassigned · te...

Add a review argv template an...
20260908-agent-review-templat...
09-08 13:17 · Unassigned · ag...

Add an exit-command field and...
20260908-agent-exit-session-h...
09-08 13:17 · Unassigned · ag...

Move built-in agents to embed...
20260908-agent-definition-emb...
09-08 13:17 · Unassigned · ag...

Todo 3

Release the card binding afte...
20260908-dispatch-binding-rel...
09-08 16:48 · Unassigned · Bu...

Move herdr to a definition fi...
20260908-terminal-herdr-hooks...
09-08 13:17 · Unassigned · te...

Funnel terminal operations th...
20260908-terminal-backend-dis...
09-08 13:17 · Unassigned · te...

Working 1

Accepted dispatches recover b...
20260908-accepted-dispatch-re...
- · Unassigned · Bug / large

Review 0

No tasks

Done 47

Press s to open the start dia...
20260908-board-start-dialog-a...
09-08 13:48 · codex · Feature...

Transaction journal partition...
20260908-journal-pending-part...
09-08 13:12 · codex · Feature...

Simplify the flowchart into a...
20260908-options-agent-model-...
09-08 12:25 · codex · Feature...

Press s in the board list to ...
20260908-board-start-task-key...
09-08 12:17 · codex · Feature...

Add a flowchart section to th...
20260908-options-workflow-flo...
09-08 12:02 · codex · Feature...

Custom agent definitions: exe...
20260908-agent-executable-ove...
09-08 11:29 · codex · Feature...

Prefix tmux pane commands wit...
20260908-tmux-pane-exec-prefi...
09-08 11:24 · codex · Bug / s...

Press g in the board list to ...
20260908-board-focus-agent-wi...
09-08 11:20 · codex · Feature...

Orchestration checkpoints, fa...
20260908-coordinator-recovery...
09-08 07:05 · codex · binding...

Tune the Executing Agent

Execution and models •unsaved

20260908T085335Z-788f1c5aac02

Large-task Agent

SIZE: large; completion report.md

← Codex (codex-cli 0.153.4) →

Codex large-task model gpt-6-astra

Codex large-task effort high

Executable Empty = built-in default

Pane process name Empty = built-in default

Small-task Agent

SIZE: small; completion SUMMARY

Grok (grok 1.0.13 (5e9a58528b76))

Grok small-task model grok-4.6

Grok small-task effort high

Executable Empty = built-in default

Pane process name Empty = built-in default

Launcher

how to launch the Agent when claiming a task

choose herdr or tmux from the current environment

↑↓ field · ↔ change · type model ids · Enter save · Esc back

- Assign different Agents and models to tasks of different sizes.
- Balance quality and cost.

Tune the Review Agents

Review and models •unsaved

20260908T085335Z-788f1c5aac02

PM Reviewer

which Agent reviews this role

← Codex (codex-cli 0.153.4) →

PM review stage:

must run

PM model gpt-6-astra

PM effort medium

CSA Reviewer

which Agent reviews this role

Cursor (2026.09.02-c22c1a3)

CSA review stage:

skip

CSA model cursor-grok-4.6-xhigh-fast

Hacker Reviewer

which Agent reviews this role

Cursor (2026.09.02-c22c1a3)

Hacker review stage:

skip

Hacker model cursor-grok-4.6-xhigh-fast

- Assign different Agents and models to each review role.
- Cross-review gives better results.

Customize Rule Modules as Needed

Rule modules •unsaved 20260908T085335Z-788f1c5aac02

Workflow preset

← Full workflow →

Collaboration ☒ On Off

Git workflow ☒ On Off

Review workflow ☒ On Off

Task intake ☒ On Off

Task groups (requires Git workflow) ☒ On Off

Completion report format ☒ On Off

Independent rules

Code quality ☒ On Off

Command contracts always apply. Start a new Agent session after saving.

↑↓ field • ↔ change • Enter save • Esc back

- The full workflow yields the highest quality.
- Unneeded rule modules can be disabled.

Open Source, Auditable, Customizable

- Audit the rule definitions thoroughly.
- Custom rules take higher priority.
- Disable kander's rule modules and replace them with your own.

Thank You

<https://github.com/dualface/kander>

Please give it a Star ;-)