



System and Parallel Programming

Dr. Alexandru Calotoiu

# C PROGRAMMING LANGUAGE

# Overview

---

Introduction

Getting started

Types, arithmetic operators

Control flow

Functions and program

Pointers and arrays


Structures

Input and output


# Literature

Brian W. Kernighan and Dennis M. Ritchie: *The C programming language*

[https://hassanolity.files.wordpress.com/2013/11/the\\_c\\_programming\\_language\\_2.pdf](https://hassanolity.files.wordpress.com/2013/11/the_c_programming_language_2.pdf)

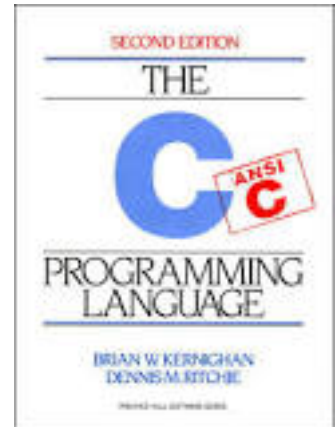

# History of C

- 
- 1966 Martin Richards develops BCPL
  - 1969 Ken Thompson and Dennis Ritchie develop B
  - 1969-1973 Dennis Ritchie develops C
  - 1978 Kernighan & Ritchie publish 1. Edition of “The C programming language”. Extensions to C and introduction of the I/O standard library
  - 1989 ANSI published a C Standard (ANSI C)
  - 1990 ANSI C becomes an ISO standard (C90)
  - 1995 C95
  - 1999 C99
  - 2011 C11

# Comparison with Java

Syntax and key words are very similar

## Main differences

- C-Pointers not available in Java
- No classes and objects in C
  - C is pure procedural programming
- Memory management
  - Manual allocation and deallocation / no garbage collection
- No inbuilt string data type in C
- C has preprocessor
- Different standard library functions (affects e.g. I/O)

# Overview

---

Introduction

Getting started

Types, arithmetic operators

Control flow

Functions and program

Pointers and arrays

Structures

Input and output

# A first program

```
#include <stdio.h>

int main()
{
    printf( "Hello world!\n" );
}
```

The slides use this font for  
source code, commands or  
filenames

# Compilation and linking

## Compilation:

- Translates the source code into machine code
- Results in an object file with extension `.o`
- Does not resolve accesses to functions/variables in other object files or libraries

## Linking:

- Binds one/multiple object files and libraries to an executable
- Resolves accesses to functions/variables in other object files



# Compilation and linking in one step

Various compilers exist:

- `gcc` (GNU C compiler) is an open source compiler
- `icc` Compiler from Intel
- `pgcc` Compiler from Oracle
- `xlc` Compiler from IBM
- Cray compiler

You can compile and link a program in one step:

```
gcc <source file> -o <executable name>
```

E.g.

```
gcc hello.c -o hello
```

# Compilation and linking in separate steps

For large programs with many source files, it can take time to recompile everything

- Recompile only modified files
- `-c` tells the compiler to compile only and do not link
- Default object name has the same base name. E,g.

```
gcc hello.c -c
```

- Results in `hello.o`

Link object files with:

```
gcc <object files> -o <executable name>
```

E.g.

```
gcc f1.o f2.o f3.o f4.o f5.o fx.o -o myprog
```

# Useful compiler arguments

- g Add debug information
- o Output file name
- c Only compile, no linking
- I (capital i) Path to search for header files
- L Path to search for libraries
- l (lowercase L) libraries that should be linked

# The make tool

Building large programs is complex and takes long

`make` manages the build process

It requires a so called `Makefile`

- contains the description how to build a program

Rebuilds only the parts of the program that changed

# Our first make file

```
all: hello
```

```
hello: hello.c
```

```
    gcc hello.c -o hello
```

**Note:** You need one tabulator in front of `gcc`. Spaces do not work.

# Makefile targets

A Makefile consists of one or multiple targets:

```
target-name: dependency-list  
commands
```

Italic code are a general description.  
E.g. *commands* need to be  
substituted by the actual commands  
Non-italic parts are meant literally.

The name of a target is usually the name of the output file

The dependency list is a list of file names or other targets on which this target depends

- The target is only rebuild if at least one file of the dependency list was modified

Arbitrary number of commands possible

- Commands must have a leading tabulator

# Invoke make

```
make [-f <my_makefile>] [target]
```

- If no Makefile is specified via `-f`, it searches in the current working directory for a file named `Makefile`
- If no target is specified, it builds the target `all`
- If `all` does not exist, it builds the first target in the `Makefile`

## `gdb`

- Available on most Linux systems
- Command line debugger
  - Works also via ssh connections on remote hosts
- Compile executable with `-g` for debug symbols

## Startup command

```
gdb <binary>
```

After starting `gdb`, it shows a command line

```
(gdb)
```



# Execution in gdb

Command	Description
<code>run &lt;program arguments&gt;</code> <code>r &lt;program arguments&gt;</code>	Starts execution of the binary
<code>continue</code> <code>c</code>	Resume execution
<code>next</code> <code>n</code>	Executes until next line of code Does not step into functions
<code>step</code> <code>s</code>	Executes until next line of code Steps into functions
<code>quit</code> <code>q</code>	Exit gdb

# Breakpoints and watches

Command	Description
<code>break &lt;function name&gt;</code> <code>b &lt;function name&gt;</code>	Adds a breakpoint at the entry of a function
<code>break &lt;sourcefile&gt;:&lt;linenumber&gt;</code> <code>b &lt;sourcefile&gt;:&lt;linenumber&gt;</code>	Adds a breakpoint at the source code line
<code>watch &lt;condition&gt;</code>	Suspend execution when a condition is met, e.g. <code>i == 3</code>
<code>delete</code>	Deletes all breakpoints
<code>delete &lt;breakpoint number&gt;</code>	Delete specific breakpoint
<code>clear &lt;function&gt;</code>	Deletes all breakpoints in the given function
<code>info break</code>	Lists all breakpoints

Command	Description
<code>where</code>	Shows current line number and function
<code>backtrace</code> <code>bt</code>	Prints the current stack
<code>backtrace full</code>	Prints local variables
<code>print &lt;variable name&gt;</code> <code>p &lt;variable name&gt;</code>	Print value of specified variable

- Shows status at current point of execution
- When an error occurs, gdb interrupts execution and allows inspection of the current location

# Thread management

Command	Description
<code>info threads</code>	Lists all threads in use
<code>thread &lt;thread id&gt;</code>	Switches to specific thread
<code>thread apply all &lt;command&gt;</code>	Applies command to all threads
<code>thread apply &lt;id list&gt; &lt;command&gt;</code>	Applies command to specified threads

- Commands are usually applied to only one thread
- Analysis shows data only for one thread

Command	Description
<code>help</code>	Prints help topics
<code>help &lt;topic&gt;</code>	Prints help for topic
<code>help &lt;command&gt;</code>	Prints help for command

- List of presented commands is incomplete

# Overview

---

Introduction

Getting started

**Types, arithmetic operators**

Control flow

Functions and program

Pointers and arrays


Structures

Input and output

# What is a variable?

Variables are names for memory locations to store data

Usually, we can refer to the variable by its name

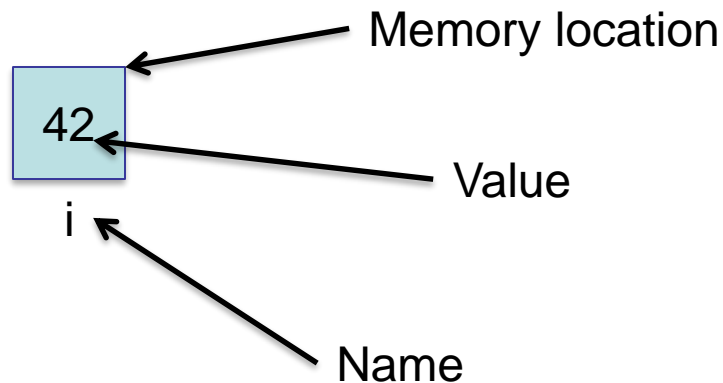

# Variable declaration

Variables must be declared before they are used

The declaration tells

- How much memory is needed to store the variable
- How to interpret the bit-pattern
- Which instructions to use.
  - E.g. Integer and floating point arithmetic have different machine codes

A declaration consists of

*type variable\_name;*

E.g.

```
int my_int;
```

In C, all statements end with  
a semicolon.



# Variable names

Consist of the characters

- A-Z
- a-z
- 0-9
- \_ (underscore)

Must not start with a number

Name	Valid?
a	yes
—	yes
K99	yes
4bar	no
my-var	no
My_vAR	yes
_5Ghf34__	yes

# Base types

Type	Description
<code>int</code>	Integer number, size depends on the host system, typically 32-bit
<code>char</code>	A single byte, holds one character
<code>float</code>	Floating point number, 32-bit
<code>double</code>	Double-precision floating point number, 64-bit
Modifiers	Description
<code>unsigned</code>	Always positive or zero. Applies to <code>int</code> and <code>char</code>
<code>long</code>	Applies to <code>int</code> . At least as long as <code>int</code> .
<code>short</code>	Applies to <code>int</code> . At least 16-bit. At most as long as <code>int</code> .

- If modifiers are used, the `int` can be omitted
- E.g. `short my_var;` instead of `short int my_var;`
- C has no in-built string type but uses arrays of `char`

# Initialization and assignment of variables

Uninitialized variables have an undefined value

The assignment operator is '='

The value on the right is assigned to the variable on the left

```
int a, b;           // Values of a and b are undefined
b = 5;              // b has now the value 5
a = b;              // the value of b is copied to a
b = b + 4;          // b has now the value 9
int c = a + b;      // c has the value 14
```

# Constants

Example	Type
3343	int
3L	long
's'	char
3.0f	float
27.0	double
"some string"	A string

# Special characters

Character	Description
<code>\n</code>	newline
<code>\t</code>	horizontal tab
<code>\v</code>	vertical tab
<code>\\</code>	backslash
<code>\b</code>	backspace
<code>\'</code>	single quote
<code>\"</code>	double quote

The backslash escape a character

Used to represent “unprintable” characters

# Arithmetic operators

Operator	Description
$A + B$	addition
$A - B$	subtraction
$A * B$	multiplication
$A / B$	division
$A \% B$	modulo, no floating point numbers
$A += B$	Equals $A = A + B$
$A -= B$	Equals $A = A - B$
$A *= B$	Equals $A = A * B$
$A /= B$	Equals $A = A / B$
$A++$	Equals $A += 1$
$A--$	Equals $A -= 1$

# Precedence

Precedence	Operator
Highest	()
	++, --
	*, /
	+, -
Lowest	=, +=, -=, *=, /=

## Example

```
a = b + c * (d + ++e);
```

1. Increment e
2. Add d+e
3. Multiply result with c
4. Add result to b
5. Assign result to a

## In general

- Follow mathematical rules
- Unary operators have high precedence
- Calculations first, assignments last
- You can force precedence with brackets
- If unsure, use brackets

# Notes for arithmetic with char variables

For C, `char` is just an integer with one byte

- Characters have a numeric value
- Arithmetic with `char` variables is integer arithmetic

```
char c = 'a';
```

```
c += 3;           // Now c has the value 'd'
```

```
c = 'z';
```

```
c = c + c + c;    // Now c has the value 'n'
```



# Expressions with mixed types

If different types appear in one operation, the compiler automatically converts one value before the operation

- It is only for the operation, the variable type does not change
- The shorter type is converted to the longer type
- Integer types are converted to floating point types
- With assignment operators, the value is converted to the target type
  - If this violates one of the other rules some compiler issue warnings
- If automatic conversion is impossible, the compiler reports an error

```
int a;  
long b;  
a = b; // b to int
```

```
int a;  
long b;  
a + b; // a to long
```

```
int a;  
double b;  
a + b; // a to double
```

# Caveats when using mixed types

```
int a = 5, b = 2;
```

```
double d = a / b; // d has now the value 2.0
```

First `a / b` is executed:

- `a` and `b` are both integers
- No conversion necessary
- Uses integer arithmetic and result is an integer with the value 2

Then the result is assigned to `d`:

- `d` is a double
- the integer value 2 is converted to a double

# Explicit type casts

A type cast converts the value of a variable to a specific type before the operation

Write the new type in round brackets before the variable

- Casts have a higher precedence than arithmetic operators

```
int a = 5, b = 2;
```

```
double d = (double) a / (double) b;
```

```
// d has now the value 2.5
```

# Overview

---

Introduction

Getting started

Types, arithmetic operators

**Control flow**

Functions and program

Pointers and arrays

Structures

Input and output

Curly braces group statements into a compound statement, or block.

- A block is syntactically equivalent to a single statement
- Everywhere, where you can put a statement, you can also put a block

```
{  
  
    int a;  
  
    a++;  
  
    printf("something");  
}
```

No semicolon after the right brace that ends a block.

# The if statement

```
if (expression)  
    statement;
```

```
else  
    statement;
```

Example:

```
if (n > 3) n=5;  
else {  
    a = 4;  
    b = 5;  
}
```

The else branch is optional  
and can be omitted

# Boolean values in C

C has no boolean type

Any non-zero value is counted as true

Zero is counted as false

# Logical operators

Operator	Description
<code>A == B</code>	True if A and B are equal
<code>A != B</code>	True if A and B are unequal
<code>A &gt; B</code>	True if A is greater than B
<code>A &lt; B</code>	True if A is smaller than B
<code>A &gt;= B</code>	True if A is greater or equal than B
<code>A &lt;= B</code>	True if A is smaller or equal than B
<code>!A</code>	True if A is false
<code>A &amp;&amp; B</code>	True if A and B are true
<code>A    B</code>	True if A or B are true



# Precedence

Precedence	Operators
high	brackets
	!
	arithmetic operators
	==, !=, >, <, <=, >=
	, &&
low	=, +=, -=, *=, /=

# Caveats with the comparison operator

This is valid C-code:

```
if ( a = b )  
{  
    printf( "b is non-zero!\n" );  
}
```

$a = b$  is an assignment.  
Thus, we assign the value of  
b to a

The result of an assignment  
is the assigned value. Thus,  
this is true if b is non-zero

Do not mistake the assignment operator '=' if you want the  
comparison operator '=='

# Nested ifs (1)

The `else` belongs to the innermost `if` that has no `else`, yet

```
if (n > 0)
    if (a < 100)
        n = a;
    else
        a = n;
```

# Nested ifs (2)

Force `else` to the outer `if` with braces

```
if (n > 0)
{
    if (a < 100)
        n = a;
}
else
    a = n;
```

# While loops

```
while( expression )  
    statement;
```

Executes a statement until expression becomes false

Evaluates expression before first iteration

```
do  
    statement;  
while( expression );
```

Evaluates expression after first iteration

Executes statement at least once

# While-loop example

Print the numbers 0 to 99 to the screen

```
int i = 0;
while ( i < 100 )
{
    printf( "%d\n", i );
    i++;
}
```

# For loops (1)

General format:

```
for( expr1; expr2; expr3 )  
    statement;
```

*expr1* is executed at the beginning of the loop

*expr2* is executed at the beginning of every iteration

- If it is false, the loop ends

*expr3* is executed at the end of every iteration

# For loops (2)

General format:

```
for( expr1; expr2; expr3 )  
    statement;
```

It is possible to omit any of the expressions

- The semicolon must stay

If *expr2* is omitted, the condition is always true

- it becomes an infinite loop

```
for( ;; ) //infinite loop
```



# For loops (3)

Usual use case:

```
int i;  
for( i=0; i < 100; i++ )  
    printf( "%d\n", i );
```

# Break statement

```
break;
```

Terminates the innermost loop or switch statement

Execution resumes after the loop or switch statement

```
while ( 1 )  
{  
    n++;  
    if ( n > 5 ) break;  
}
```

# Continue statement

`continue;`

Terminates the current iteration of the innermost loop

Execution resumes at the beginning of the next iteration

```
for (i=0; i<100; i++)  
{  
    if ( i == 57 ) continue;  
    printf( "%d\n", i );  
}
```

Print the numbers 0 to 99, but not 57

# The switch statement

```
switch( expression )  
{  
    case const-expr: statements  
    case const-expr: statements  
    default: statements  
}
```

`const-expr` must be constant integer values

Execution falls through

- Executes also all following cases
- Usually exit the switch with a `break`

# Switch example



```
int digit=0, whitespace=0, other=0, c;
while( (c = getchar()) != EOF ) {
    switch ( c ) {
        case '0': case '1': case '2': case '3': case '4':
        case '5': case '6': case '7': case '8': case '9':
            digit ++;
            break;
        case ' ': case '\t': case '\n':
            whitespace ++;
            break;
        default: other++;
    }
}
```

`getchar()` reads one  
character from the keyboard

# The ? operator

*expr1* ? *expr2* : *expr3*;

First, evaluates *expr1*

- If *expr1* is true, the value of the expression is *expr2*
- If *expr1* is false, the value of the expression is *expr3*
- The branch that is not assigned is not evaluated

Precedence is higher than assignments but lower than logical and arithmetic operators

`max = a > b ? a : b;`

Is equivalent to

`if ( a > b ) max = a;`

`else max = b;`

# Overview

---

Introduction

Getting started

Types, arithmetic operators

Control flow

**Functions and program**

Pointers and arrays

Structures

Input and output

# Functions (1)

Functions are the building blocks of a program

Allow to reuse code for reappearing algorithms

Decomposing a program into multiple functions

- Provides code structure
- Increases maintainability
- Avoid 100+ line functions, if possible

Programming is the art of decomposing a large task into appropriate building blocks.



# Functions (2)

```
return_type function_name ( argument_list )  
{  
    declarations and statements  
}
```

This is the  
header of the  
function

This is the  
body of the  
function

Function names follow the same rules as variable names

The argument list and body may be empty:

```
return_type function_name()  
{ }
```

# Return statement

The return type can be every C-type

```
return expression;
```

If the execution encounters a return statement,

- It evaluates the expression
- Converts the result to the return type of the function
- Exits the function
- Returns the results of the expression

If the function reaches its end without encountering a return statement the return value is undefined

- Some compilers issue warnings

# Return type void

If a function has return type void it returns no value.

It still can have return statements

- but they must have no expression

```
void foo()  
{  
    return;  
}
```

# Parameter lists

Comma-separated list of variable definitions

The variables are initialized with the value passed on function call

```
int pow( int base, int exponent )  
{  
    int i, result = 1;  
    for( i=0; i < exponent; i++ ) result *= base;  
    return result;  
}  
  
int my_var = pow( 4, 6 );
```

# Calling a function

The parameter values are assigned to the parameters in the function definition in the order of their appearance

The return value can be ignored

```
int foo()  
{  
    return 2;  
}
```

```
float square(float v)  
{  
    return v*v;  
}
```

```
int a, b = foo();
```

```
a = 2 + pow( b, b );
```

```
square( foo() ) + pow( 2*b+1, 3 ) / 4;
```

# The main function

Every program needs a function named `main`

```
int main( int argc, char** argv )
```

The program execution starts with `main`

The return value of `main` is the return value of the program

- Usually, returning a non-zero value means the program terminated with an error

`argc` contains the number of program arguments

`argv` contains the program arguments

- We will explain later what the `**` means

You can leave the parameter list empty: `int main()`

# Function declaration (1)

You can call only functions that are declared before

- One possibility is to write the functions that are calling a function after the function that is called
- Not possible if mutual calls or a cycle of calls exist

```
int foo( int n )
{
    if (n > 0)
        return bar( n-1 );
    return 0;
}
```

```
int bar( int n )
{
    if (n < 0)
        return foo( n+1 );
    return n;
}
```

# Function declaration (2)

Solution: Add a function declaration in front of the implementation

- Consists of the function header followed by a semicolon

```
int bar( int n );

int foo( int n ) {
    if (n > 0)
        return bar( n-1 );
    return 0;
}

int bar( int n ) {
    if (n < 0)
        return foo( n+1 );
    return n;
}
```



The scope of a symbol defines where it is accessible

- A symbol is everything that has a name
- variables, functions, types, ...

A symbol needs to be declared before it accessed

A scope can be restricted further

- It is good style to restrict scope
- Increases maintainability and readability
- Avoids side-effects
- Avoids name clashes

# Global variables

A variable is global if it is declared outside of any function

Variable is constructed at program start

Variable is deleted at program finalization

The variable can be accessed throughout the whole program

```
int global_var = 5;

int main() {
    printf( "global_var = %d\n", global_var );
}
```

# Local variables

Local variables are declared within a code block.

- Statements enclosed in curly brackets are code blocks
- Function bodies are code blocks

```
{  
    int i;  
    // do something  
}
```

Variable is constructed at entry of the block

Variable is deleted at exit of the block

Access to the variable is only valid within the block

Parameter variables are local variables of the function body

# Static variables

Local variables do not keep their value between visits

If a variable is declared `static`

- It keeps its value between calls
- Only the first visit executes the initialization
- The initialization value must be a constant

```
int foo() {  
    static int counter = 0;  
    return ++counter;  
}
```

Returns the number of times the function was called

# Variables with same name

---

If on same scope, it results in a compiler error

A variable in an inner scope overshadows variables in an outer scope

# Scope example (1)

```
int a = 5;

int main() {
    printf( "a = %d\n", a );
    int a = 3;
    printf( "a = %d\n", a );
    {
        int a = 1;
        printf( "a = %d\n", a );
    }
    printf( "a = %d\n", a );
}
```

5  
a

Global variable is constructed  
The `printf` knows only the global `a`  
and prints `a = 5`

## Scope example (2)



```
int a = 5;

int main() {
    printf( "a = %d\n", a );
    int a = 3;
    printf( "a = %d\n", a );
    {
        int a = 1;
        printf( "a = %d\n", a );
    }
    printf( "a = %d\n", a );
}
```

5

3

a

A new local variable `a` is created  
The global variable is overshadowed  
`a` refers to the local variable  
The program prints `a = 3`

# Scope example (3)



```
int a = 5;

int main() {
    printf( "a = %d\n", a );
    int a = 3;
    printf( "a = %d\n", a );
    {
        int a = 1;
        printf( "a = %d\n", a );
    }
    printf( "a = %d\n", a );
}
```

5

3

1

a

A variable `a` is created  
`a` refers to the innermost  
variable  
The program prints `a = 1`



# Scope example (4)

```
int a = 5;

int main() {
    printf( "a = %d\n", a );
    int a = 3;
    printf( "a = %d\n", a );
    {
        int a = 1;
        printf( "a = %d\n", a );
    }
    printf( "a = %d\n", a );
}
```

5

3

a

1

With the end of the block the  
the variable exists no more

The innermost variable that  
is still visible is

# Source files organization

C source files have the extension `.c`

Larger programs consist of multiple source files

If you call functions from other source files

- The functions are not declared before you used them
- The compiler complains about unknown functions

Solution

- Put a declaration of the functions at the top of every file
- Means you have to copy the function declaration multiple times

## Better

- Put the declarations in a header file
- Tell the compiler to include the header file
- The C-preprocessor copies the content of the included file at the position of the include directive
- Header files have the extension `.h`
- Guarantees that all sources have the same declarations

`#include <filename>`

- Searches only in the include path

`#include "filename"`

- Searches in the include path and the source path

# Standard header

The C standard defines a library of standard functions

The linker automatically links the standard library

The functions are declared in a set of standard headers

To use the standard functions you need to include the header

E.g. `printf` is declared in `stdio.h`

# Include path

The compiler knows path to standard headers

Add search directories for header file to compiler with `-I dir`

```
gcc -I/path/to/my/header hello.c -o hello
```

# Global variables in other files

When two source files contain a declaration of the same global variable

- The compiler will create two distinct global variables with the same name
- The linker complains about two symbols with the same name

The `extern` keyword tells the compiler

- The variable is defined in another source file
- Do not create a new variable
- Access the variable from the other source file

Thus, for global variables that are used in multiple source files

- One source file declares the variable without external
- Put an extern variable declaration in a header

# Global variable example

my\_global\_vars.c

```
int global_var;
```

my\_global\_vars.h

```
extern int global_var;
```

Any other source file

```
#include "my_gloabl_vars.h"
```

# Static functions

A static function can not be called from other source files

- Avoids name clashes between helper functions in different source files
- Ensures that the interface is not hijacked by someone else

```
static int foo()  
  
{  
  
}
```



# Overview

---

Introduction

Getting started

Types, arithmetic operators

Control flow

Functions and program

**Pointers and arrays**

Structures

Input and output

# Memory organization

A typical computer has one long array of memory cells

They can be manipulated individually or in contiguous groups


Every cell can store one byte

The cells are enumerated

The number of a cell is its address

If a program wants to access a memory location it needs the address

The compiler/linker translates variable names into addresses

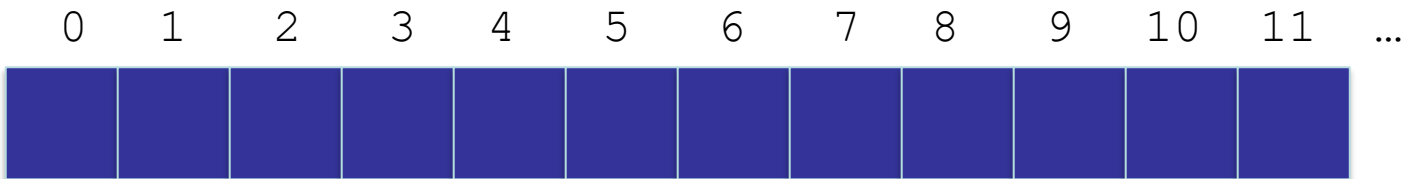


# Pointer (1)

With the reference operator &, we can get the address of a variable:

```
int i = 42;  
printf( "%p", &i}; // Prints address of i
```

Pointers are variables that store memory addresses

Pointers can only point to variables of a specific type

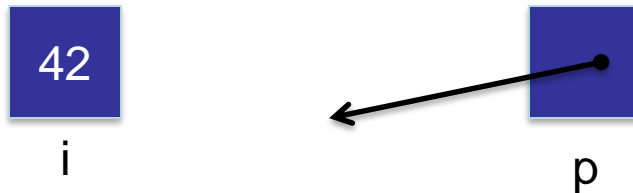


```
int* p;
```

Creates a variable to store an address to an integer variable

# Pointer (2)

We need to assign an address of another variable.

```
p = &i;
```

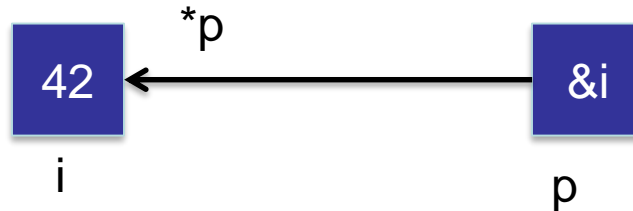

We can access the value to which p points with the dereference operator \*

```
printf( "%d", *p ); // Prints 42
```

If we assign a value to `*p`, we implicitly alter `i`

```
*p = 12;
```

```
printf( "%d", i ); // Prints 12
```

# Pointer (3)

If we pass a pointer as parameter to the function, we copy an address

```
void func( int* p ) {  
    *p = 2; // assigns a new value to i  
}  
  
func( &i );
```

Avoid side-effects as much as possible


- Side-effects may lead to unexpected program behavior

# Pointer (4)

Caution: The creation of a pointer does not allocate memory for a value

```
int* p;
```

```
*p = 42;
```



Results in errors

`p` stores an arbitrary address

Writing something means writing to an arbitrary memory location

Leads to hard-to-find bugs or segmentation faults

# Null pointer

```
int* p = NULL;
```

NULL is a pointer to the address 0

It is defined in `stddef.h`

It marks an invalid pointer

Allows checks whether a pointer is valid


```
if ( p == NULL ) { ... }
```

# Arrays

```
int a[10]
```

Defines an array of 10 `int` variables

The elements of the array have the names `a[0]` ... `a[9]`

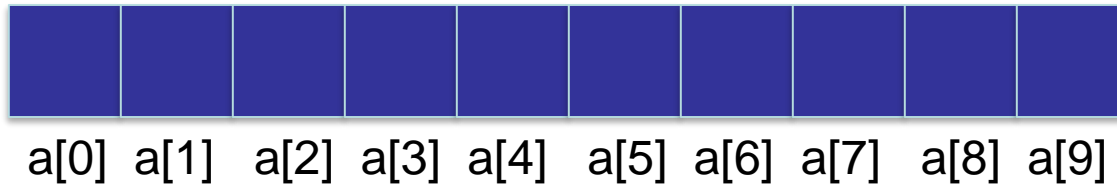

Initialization with a constant


```
int b[3] = {0, 1, 2};
```



# Address arithmetic (1)

```
int* pa = &a[0];
```


Creates a pointer to the first element of the array

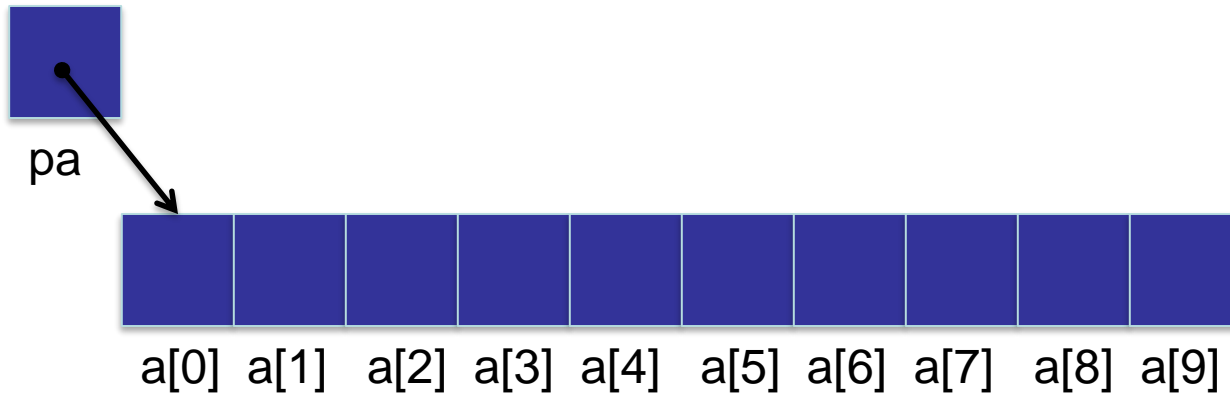

## Address arithmetic (2)

```
int* pa = &a[0];
```

Creates a pointer to the first element of the array

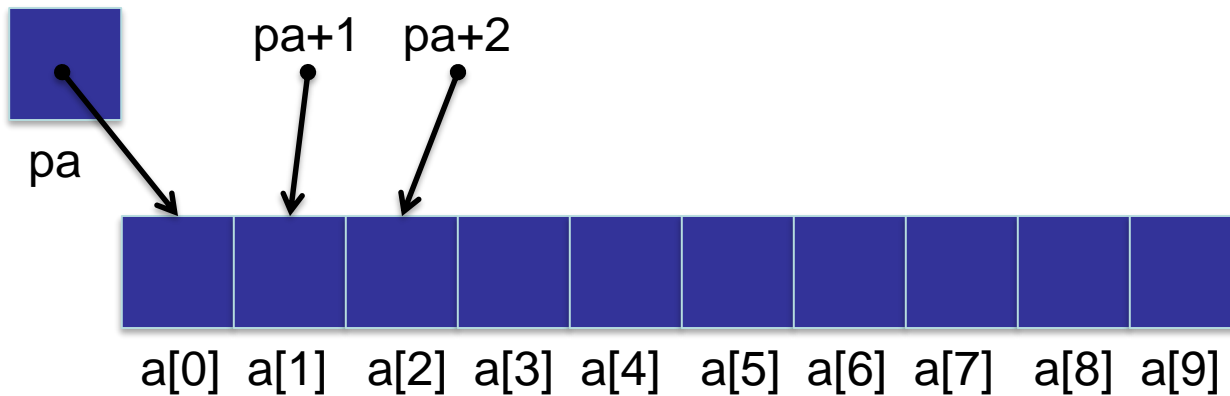

`*pa` accesses the first element


`*(pa + 1)` accesses `a[1]`

`*(pa + i)` accesses `a[i]`

# Address arithmetic (3)

Can use arithmetic operators on `pa`


```
pa += 4; // Now points to a[4]
```

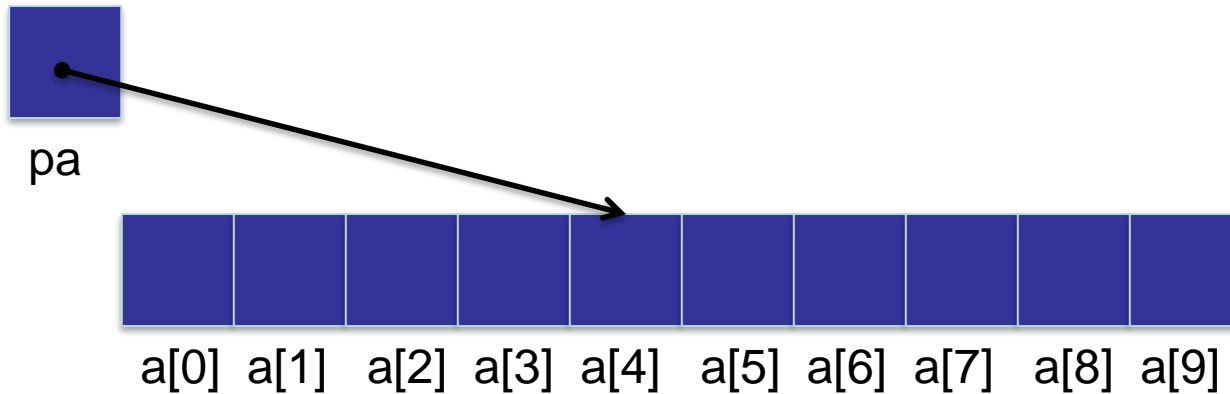

# Address arithmetic (4)

```
int* pa = a;
```

```
// Short form for: int* pa = &a[0];
```

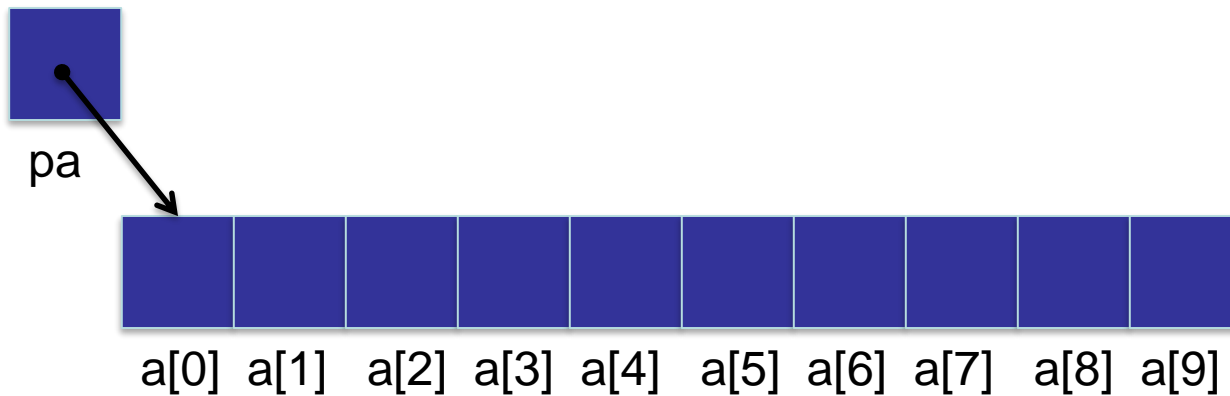

It is possible to use element access with pointers

```
int i = pa[3]; // Assigns a[3] to i
```

# Passing arrays as parameters

The address of the first element is passed

```
#include <stdio.h>

int foo( int* a ) {
    printf( "%p\n", a );
}

int main() {
    int a[10];
    printf( "%p\n", a );
    foo( a );
}
```

Prints 2 times the same address

# Differences between arrays and pointers

```
int a[10]  
  
int* pa = a;  
  
pa++;  
  
is legal
```

But the following is illegal

```
a = pa;  
  
a++;
```

No assignments to and address arithmetic on arrays!

# Pointer type void

```
void* a;
```

Creates a pointer variable with unspecified target type

Can assign any pointer type to a `void*`

No address arithmetic possible on `void*`

- Do not know the size of the elements

Need to cast the pointer, before I can use it

```
double d[10];
```

```
a = &d;
```

```
* (double*) a = 3.2;
```

Dereference a `double*`



Cast a to a `double*`

# Motivation – dynamic allocation (1)

The size of arrays is determined at compile time

- They have a constant size

Sometimes the size is only known at runtime



# Motivation – dynamic allocation (2)

Want to return an array from a function

```
int* foo() {  
    int a[10];  
    return a;  
}
```


```
int* b = foo();  
b[0] = 1; // Error
```

# Motivation – dynamic allocation (3)

Want to return an array from a function

```
int* foo() {  
    int a[10];           // Creates an array  
    return a;            // Returns the address  
}
```

```
int* b = foo();  
b[0] = 1; // Error
```

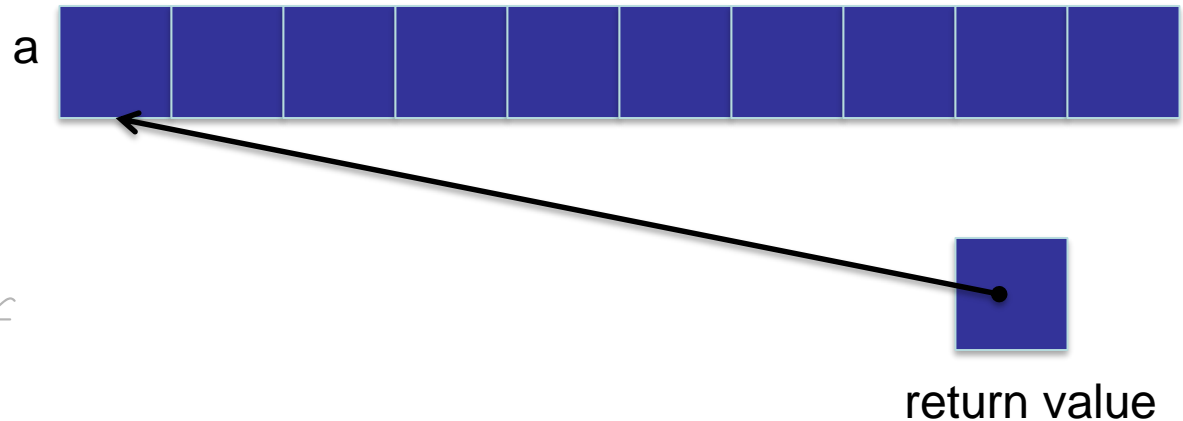


# Motivation – dynamic allocation (4)

Want to return an array from a function

```
int* foo() {  
    int a[10];  
    return a;  
} // Deletes a
```

```
int* b = foo();  
b[0] = 1; // Accesses an invalid memory
```

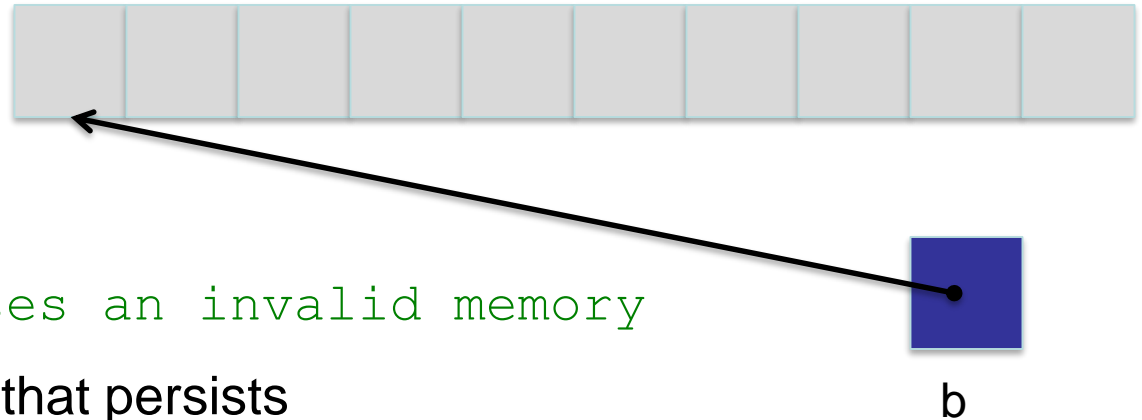

Want to allocate memory that persists

# Dynamic memory allocation

```
void* malloc( size_t size )
```

- Allocates a memory block with the specified number of bytes
- Returns a pointer to the start of the memory block
- Is declared in `stdlib.h`
- The content of the allocated memory is undefined

```
sizeof( type )
```

- Is an operator that returns the number of bytes for `type`

# Free allocated memory

Memory allocated dynamically is not automatically freed

- The programmer must take care to free the memory
- When a program frequently allocates memory but never frees it, it may run out of memory
- Memory management is a source of many errors in C

```
void free( void* p );
```

- Is declared in `stdlib.h`
- Frees the memory of the passed pointer

# Allocation example

Allocates an array of 100 `int`

Initializes it with the number 0 to 99

```
#include <stdlib.h>
```

```
int main()
```

```
{
```

```
    int *p = malloc( sizeof( int ) * 100 );
```

```
    int i;
```

```
    for( i=0; i < 100; i++ ) p[i] = i;
```

```
    free( p );
```

```
}
```

# Qualifier const

The `const`-qualifier inhibits modifications to a variable

Assignment only possible at initialization

```
const double pi = 3.14159265359;
```

```
pi = 4; // Compiler error
```

# Constant parameters

When passing pointers to functions

- Modifications in the function affects the caller
- Side effects are bad

Make parameter `const`


- Ensures that no side-effects happen on this variable
- Making pointer parameters `const` is part of a clean style

```
void foo( const int* a )  
{  
    *a = 1; // Compiler error  
}
```




# const int\* and int\* const

```
int i;  
const int* a;  
a = &i; // allowed  
*a = 0; // error
```

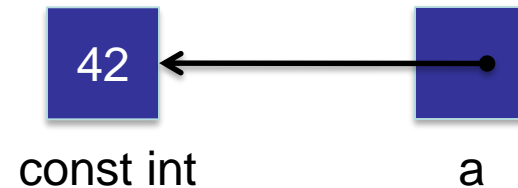

```
int* const b = &i; // initialization  
b = NULL; // error  
*b = 0; // allowed
```

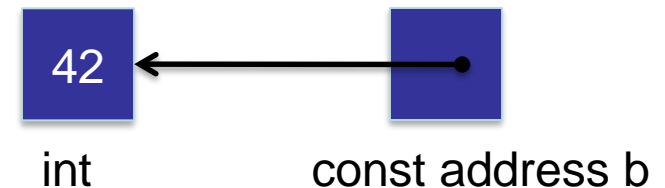

# Strings in C

C has no in-build data type for strings

C-Strings are `char`-arrays

The end of the string is marked with the `'\0'`-character

- For a string with `n` characters you need an array with `n+1` elements

Initialization with a string constant

```
char* str = "constant C-string";
```

# String operations in C

The C standard library contains a set of string handling functions

Most of them are declared in `string.h`

Function	Description
<code>strlen</code>	Returns the length of a string
<code>strdup</code>	Duplicates a string
<code>strcpy</code>	Copies the content of a string into another string
<code>strcmp</code>	Compares the content of two strings
<code>strcat</code>	Concatenate two strings

# Example – string duplication

```
char* strdup( char* source ) {  
    int length = strlen( source ) + 1;  
    char* c, str = malloc( length * sizeof( char ) );  
    for ( c = str; *source != '\\0'; source++) {  
        *c = *source;  
        c++;  
    }  
    *c = '\\0';  
    return str;  
}
```

A common source  
of errors is to  
forget to terminate  
a string with the  
'\\0'-character


# String pitfalls

```
char* x = "a string";
```

```
char* y = x;
```

Does not copy the string

Use `strdup()` for copying strings

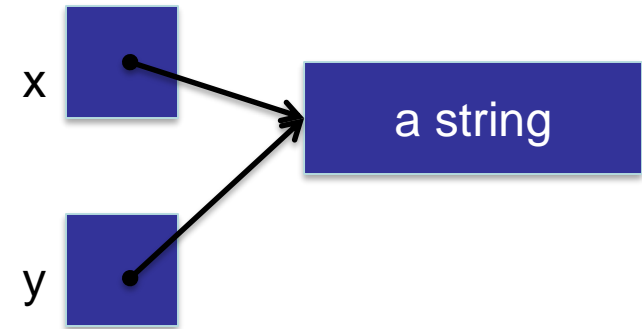

```
x == y
```

Does not compare the string content

Is only true if both point to the same memory address

Use `strcmp()` to compare the string content

# Pointer arrays – pointers to pointers

You can create arrays of pointers like for any other variable

Both of the following create an array of 3 `char*`


```
char* a[3];
```

```
char** b = malloc( sizeof( char* ) * 3 );
```

Access the 3rd character of the first word

```
char c = a[0][2];
```

```
c = b[0][2];
```

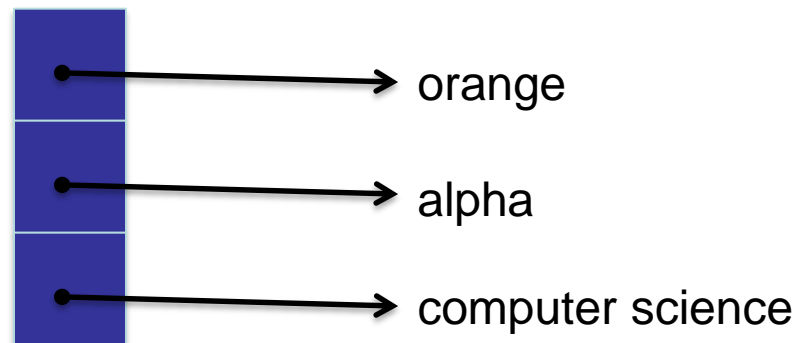

# Multidimensional arrays

```
int a[4][4];
```

Defines a two dimensional array

Initialization with a constant

```
int a[2][2] = { {1, 2}, {3, 4} };
```

# Pointers vs. multidimensional arrays


```
char** a = malloc( ... );
```

Creates array of undefined pointers

- Need to allocate every element

Row can have a different length

Rows may not be adjacent in memory

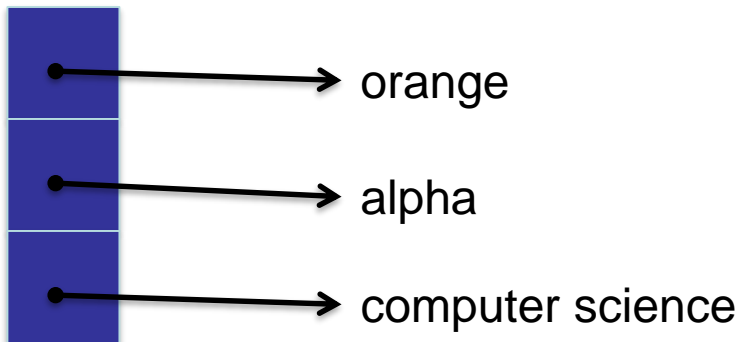

```
char b[4][4];
```

Allocates 4x4 elements

All rows have the same length

One contiguous memory block

o	r	a	n
a	l	p	h
c	o	m	p
l	a	k	e




# Allocate memory for an array of pointers

```
#include <stdlib.h>

int main() {
    char* a[3];

    for( int i=0; i<3; i++ ){
        a[i] = malloc( sizeof( char ) * 4 );
    }


    //do something
    for (int i=0; i<3; i++) {
        free(a[i]);
    }
}
```

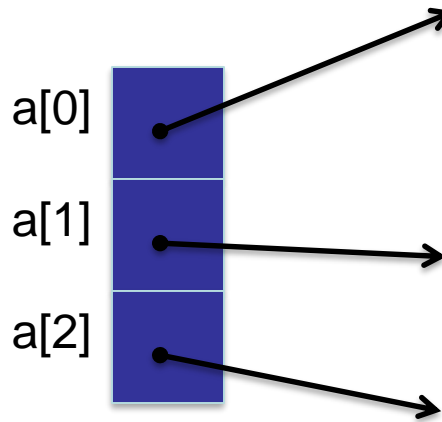

# Allocate memory for an array of pointers

```
#include <stdlib.h>


int main() {
    char* a[3];
    for( int i=0; i<3; i++ ){
        a[i] = malloc( sizeof( char ) * 4 );
    }
    //do something
    for (int i=0; i<3; i++) {
        free(a[i]);
    }
}
```

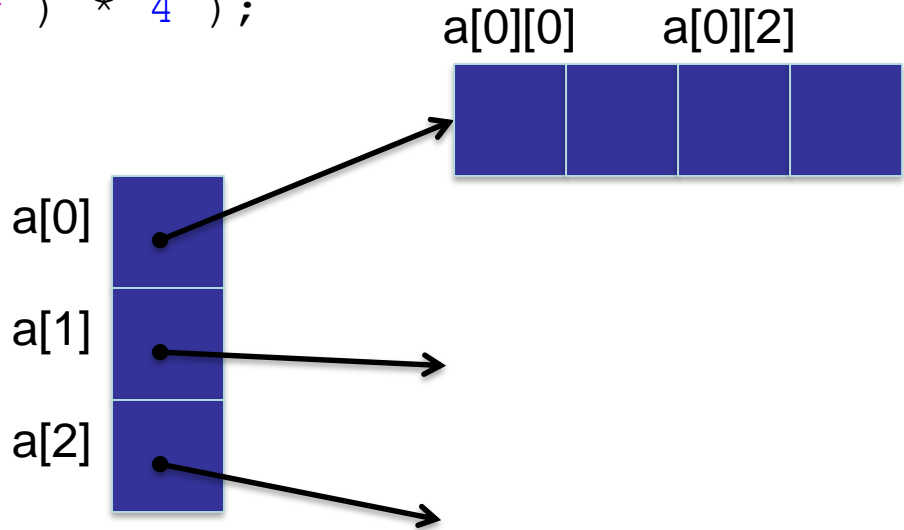

# Allocate memory for an array of pointers

```
#include <stdlib.h>


int main() {
    char* a[3];
    for( int i=0; i<3; i++ ){
        a[i] = malloc( sizeof( char ) * 4 );
    }
    //do something
    for (int i=0; i<3; i++) {
        free(a[i]);
    }
}
```

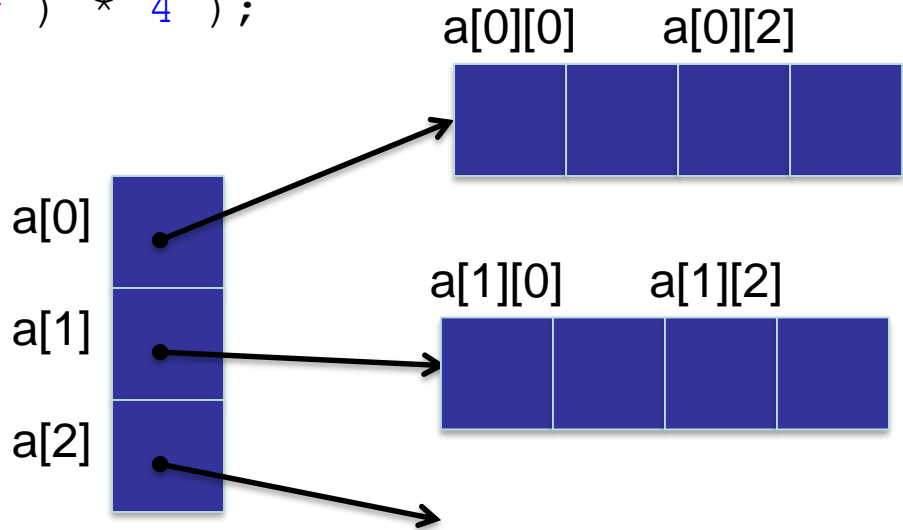

# Allocate memory for an array of pointers

```
#include <stdlib.h>

int main() {
    char* a[3];
    for( int i=0; i<3; i++ ){
        a[i] = malloc( sizeof( char ) * 4 );
    }
    //do something
    for (int i=0; i<3; i++) {
        free(a[i]);
    }
}
```

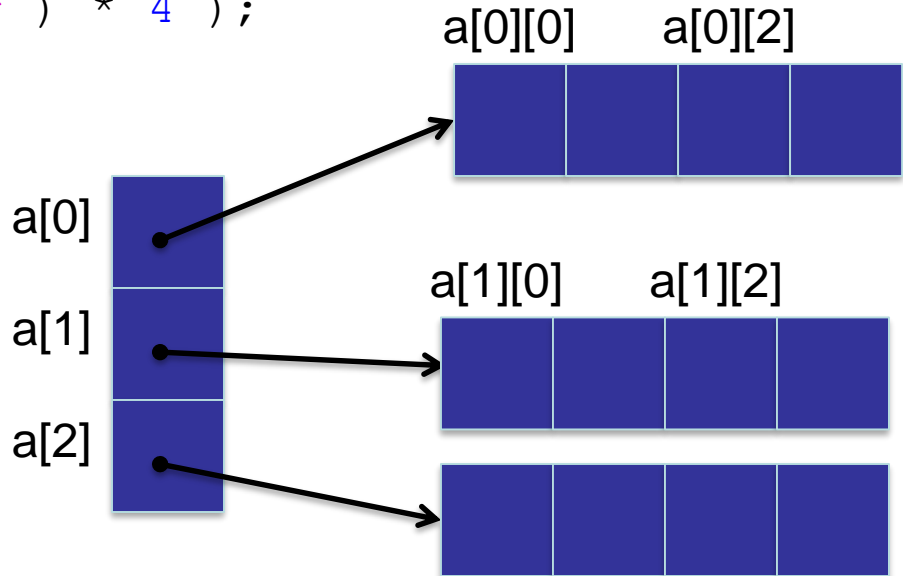


# Allocate memory for an array of pointers

```
#include <stdlib.h>

int main() {
    char* a[3];
    for( int i=0; i<3; i++ ){
        a[i] = malloc( sizeof( char ) * 4 );
    }

    //do something
    for (int i=0; i<3; i++) {
        free(a[i]);
    }
}
```

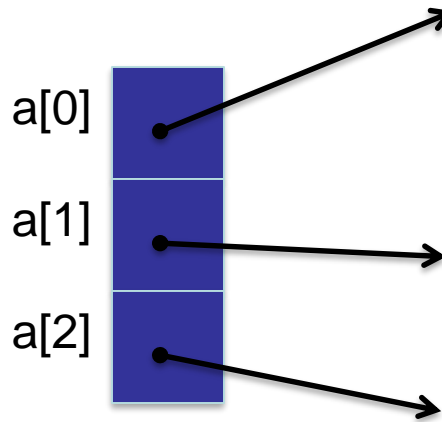

# Allocate memory for pointer to pointers

```
#include <stdlib.h>
```

```
int main() {
```

```
    char** a = malloc( sizeof( char* ) * 3 );
```

```
    for( int i=0; i<3; i++ ){
```

```
        a[i] = malloc( sizeof( char ) * 4 );
```

```
    }
```


```
    for (int i=0; i<3; i++) {
```

```
        free(a[i]);
```

```
    }
```

```
    free( a );
```

```
}
```

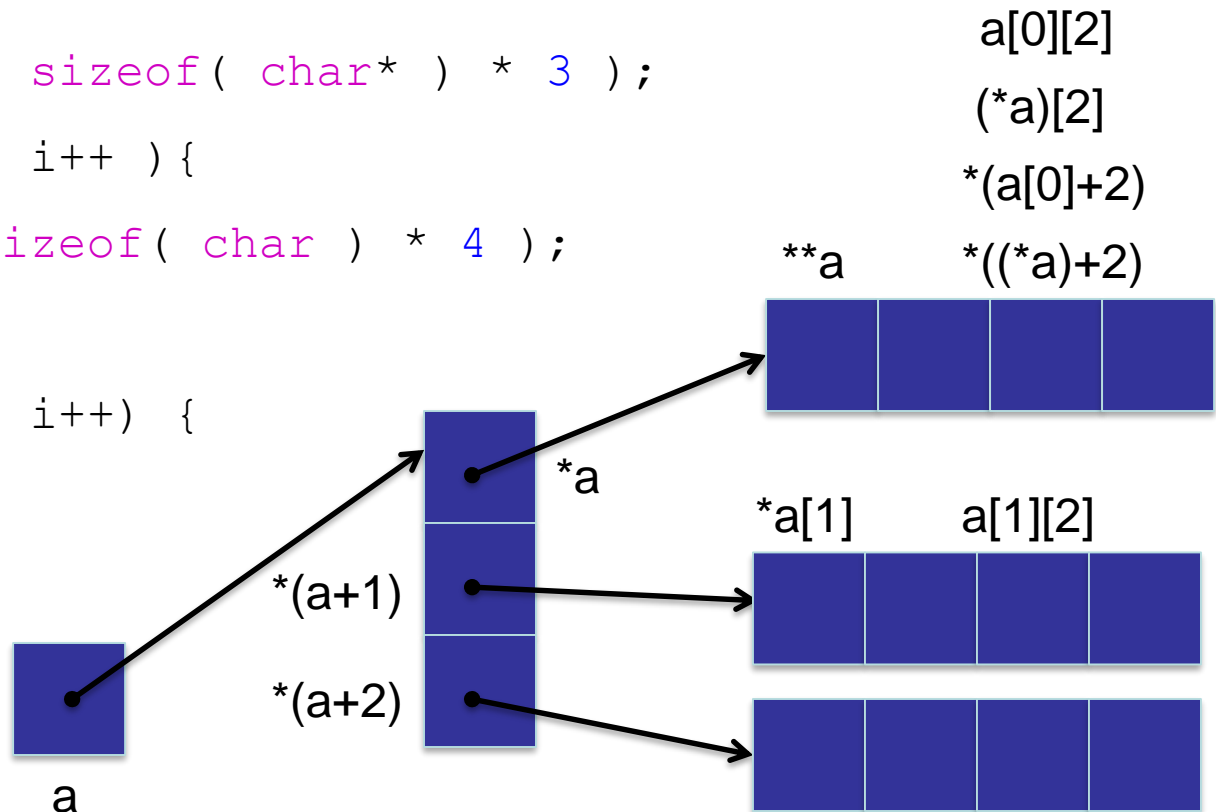

# Command-line arguments

```
int main( int argc, char** argv )
```


Program arguments are passed as an array of `char*`

`argc` provides the number of arguments

`argv` contains the arguments

```
./my_prog text_file1 option2
```

Results in 3 arguments (`argc = 3`)

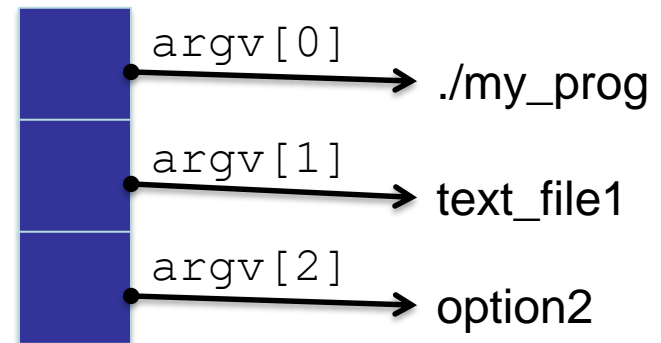

# Processing program arguments


```
#include <string.h>

int main( int argc, char** argv )
{
    for( int i=1; i<argc; i++ )
    {
        if ( strcmp( argv[ i ], "option1" ) == 0 ) { ... }
        else if ( strcmp( argv[ i ], "option2" ) == 0 ) { ... }
        else if ( strcmp( argv[ i ], "option3" ) == 0 ) { ... }
        else { ... }
    }
}
```




# Memory leaks (1)

```
{  
    int* p;           // Creates a pointer  
    p = malloc( sizeof( int ) );  
}
```

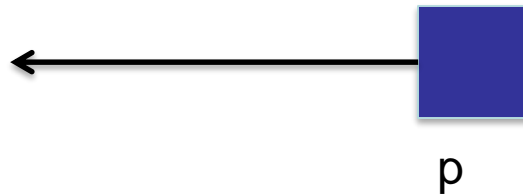


# Memory leaks (2)

```
{  
    int* p;           // Creates a pointer  
    p = malloc( sizeof( int ) );  
                     // Creates a new int variable  
}
```

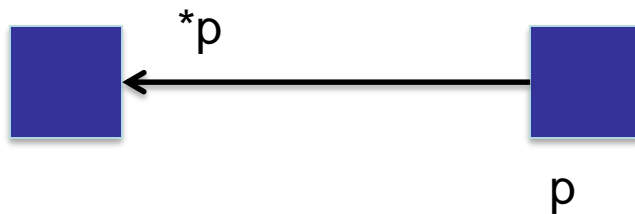

# Memory leaks (3)

```
{  
    int* p;           // Creates a pointer  
    p = malloc( sizeof( int ) );  
                       // Creates a new int variable  
}                     // Deletes the pointer  
                     // but the variable still exists
```



No chance to access or free this memory allocation!


Make sure that you delete all objects you allocated

# Memory leaks (4)

```
int *p = malloc( sizeof( int ) );
```



```
p = malloc( sizeof( int ) );
```

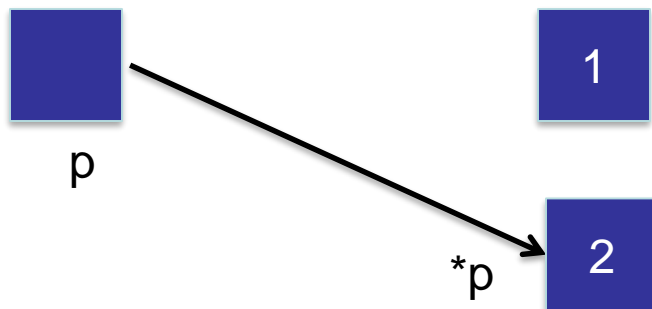


Memory allocation still exists  
Not able to access it again

Delete old memory before allocating new memory

# Dangling pointers (1)

```
int* p;    // Create a pointer variable
{
    int i;  // Create an integer variable
    p = &i; // Assign address of i to p
}

*p = 42;
```

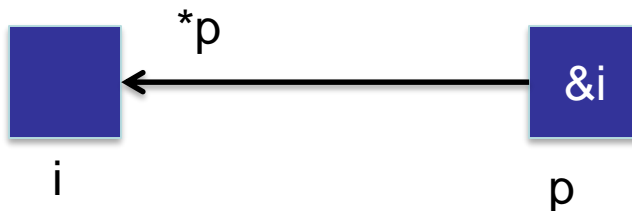

# Dangling pointers (2)

```
int* p;    // Create a pointer variable
{
    int i;  // Create an integer variable
    p = &i; // Assign address of i to p
}          // Delete i, p becomes a dangling pointer
*p = 42;   // Error: Accesses non-existing variable
```



# Overview

---

Introduction

Getting started

Types, arithmetic operators

Control flow

Functions and program

Pointers and arrays

**Structures**

Input and output

# Structures (1)

A structure is a collection of variables that belong together

```
struct name {  
    member variable definitions  
};
```

E.g.

```
struct point {  
    int x;  
    int y;  
};
```



# Structures (2)


A structure is a new type

Variable declaration of a `struct`

```
struct point a;
```

With initialization

```
struct point b = {1, 2};
```



# Member access

The `.` operator accesses members of a structure

```
struct point p;
```

```
p.x = 1;
```

```
p.y = 2;
```

# Pointers and arrays of structures

```
struct point a[3];
```

```
struct point* b = malloc (sizeof(struct point) * 3);
```

Both create an array of 3 point structures

Access to members with a pointer with the `->` operator

```
b->x;
```

# The typedef keyword

```
typedef type newname;
```

Defines a new name for a type.

```
typedef int Integer;
```

```
typedef char* String;
```

```
Integer i = 1;
```

```
String s = "Hello";
```

Often used for complex data types like structures

```
typedef struct point Point;
```

```
Point p = {1, 2};
```

# Type definitions for structures

Define `struct point` and define a new type name for it

```
typedef struct point Point;  
struct point {  
    int x;  
    int y;  
};
```

Equivalent definition in one statement

```
typedef struct point {  
    int x;  
    int y;  
} Point;
```

Define type for an unnamed struct

```
typedef struct {  
    int x;  
    int y;  
} Point;
```

# Assignment of structures

Assignments of structures copy the value of all members

```
struct point {  
    int x;  
    int y;  
};  
  
struct point a = {1, 2};  
struct point b = a;  
printf("x = %d, y = %d\n", b.x, b.y);
```

Output: x = 1, y = 2

# Incomplete types

In `example.h`:

```
typedef struct MyStruct
    MyStruct;
void foo(MyStruct *m);
MyStruct* create();
```

`example.c`

```
struct MyStruct {
    int i;
};
Implementation of foo and create
```

Other files that include `example.h` can use pointers of `MyStruct`

They cannot dereference the pointer

- Compiler does not know the layout `MyStruct`
- The type is incomplete


Need to access `MyStruct` through the functions in `example.h`

- Hides implementation details and exposes only interface

# Motivation – self-referential structures

In data structures like linked-lists or trees

Elements need to point to other elements

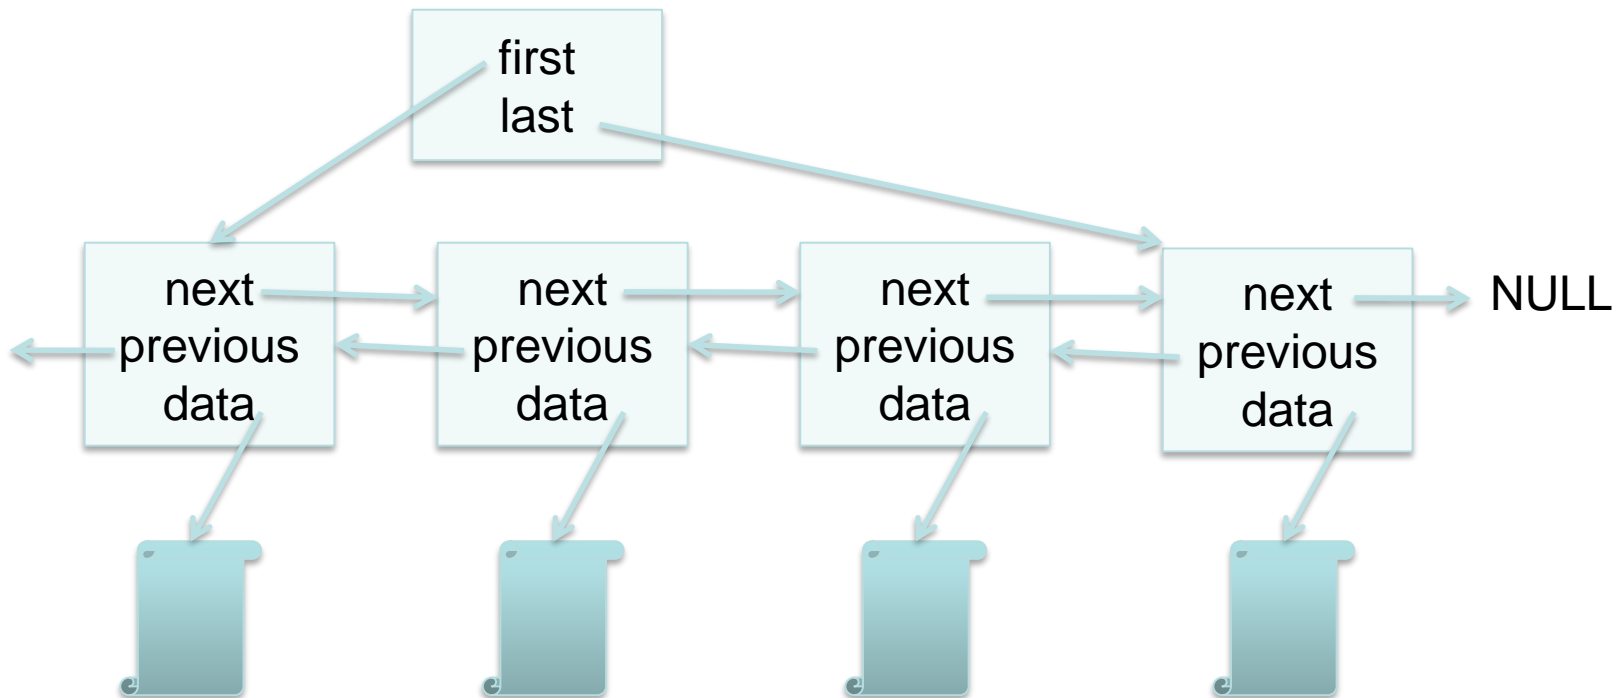



# Self-referential structures

Structures can have members that are pointers objects of its own type

```
struct LinkedList {  
    struct LinkedList* next;  
};
```

You cannot put a member in a `struct` that is of its own type

- Would lead to infinite recursion and require infinite memory


```
struct BrokenCode {  
    struct BrokenCode a;  
};
```

# Example – sorted binary tree: data type

```
typedef struct TreeNode TreeNode;
```

```
struct TreeNode {  
    TreeNode* left;  
    TreeNode* right;  
    int value;  
};
```

```
typedef struct {  
    TreeNode* root;  
} BinaryTree;
```

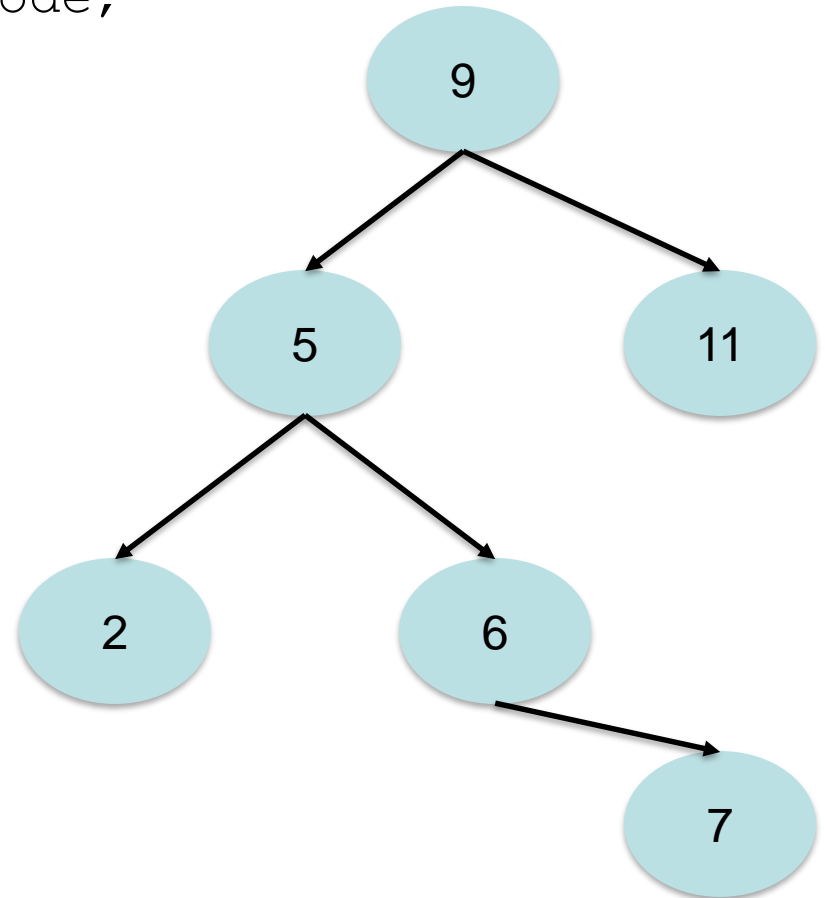

# Example – sorted binary tree: creation

```
BinaryTree* BinaryTree_create()  
{  
    BinaryTree* tree = malloc( sizeof( BinaryTree ) );  
    tree->root = NULL;  
    return tree;  
}
```

# Example – sorted binary tree: insertion (1)

```
static void insert_node( TreeNode* parent, TreeNode* node );
void BinaryTree_insert( BinaryTree* tree, int value )
{
    TreeNode* new_node = malloc( sizeof( TreeNode ) );
    new_node->value = value;
    new_node->right = NULL;
    new_node->left  = NULL;
    if (tree->root == NULL) {
        tree->root = new_node;
        return;
    }
    insert_node( tree->root, new_node );
}
```

## Example – sorted binary tree: insertion (2)

```
static void insert_node( TreeNode* parent, TreeNode* node )
{
    if( parent->value > node->value )
    {
        if( parent->left == NULL ) parent_left = node;
        else insert_node( parent->left, node );
    }
    else
    {
        if( parent->right == NULL ) parent_right = node;
        else insert_node( parent->right, node );
    }
}
```

# Example – sorted binary tree: deletion

We need to deallocate all `TreeNode` objects to avoid memory leaks, when we free a `BinaryTree` object.

```
static void delete_node( TreeNode* node )
{
    if (node->left != NULL) delete_node( node->left );
    if (node->right != NULL) delete_node( node->right );
    free( node );
}

void BinaryTree_delete(BinaryTree* tree)
{
    if ( tree->root != NULL ) delete_node( tree->root );
    free( tree );
}
```

# Overview

---

Introduction

Getting started

Types, arithmetic operators

Control flow

Functions and program

Pointers and arrays

Structures

**Input and output**

# General remarks on input and output in C

Input and output are not built into the language

Provided through library functions

C implements a simple model

The console, the keyboard, a file, everything is a stream

Each line ends with `'\n'`

A file ends with `EOF`

- `EOF` is defined in `stdio.h`



# Standard input

Usually, the standard input is the keyboard

It is possible to redirect the standard input:

```
./myprog < infile
```

The content of `infile` becomes the standard input for `myprog`

```
int getchar()
```

- Basic input function
- Returns the next character from standard input
- Returns `EOF` if the end of the file is reached

# Standard output

Usually, the standard output is the screen

It is possible to redirect the standard output:

```
./myprog > outfile
```

Writes the standard output to `outfile`

```
int putchar( int c )
```

- Basic output function
- Writes the character `c` to the standard output
- Returns `EOF` if an error occurred else it returns `c`

# printf



```
int printf(char* format, arg1, arg2, ... )
```

- Converts, formats, and prints arguments to the standard output
- Returns the number of characters printed
- Declared in `stdio.h`

The `format`-string formats the arguments

- Ordinary characters are copied to the output stream
- After `%` a description starts how to convert a variable
- The printed variables are passed as additional parameters in the order they appear in the `format`-string

# Variable output format

Symbol	Description
%	Starts always with this character
-	Optional: Specifies left adjustment
A number	Optional: Minimum field width
Period and number	Optional: Maximum number of characters for a string / Number of digits after decimal point for floating point numbers
h	For short integers
l	(uppcase L) for long integers
Character	The conversion character specifies the data type of the variable. See next slide

# Conversion characters

character	Description
d, i	int: decimal number
o	int: unsigned octal number
x, X	int: unsigned hexadecimal number
u	int: unsigned decimal number
c	int: single character
s	char*: Prints a string until '\0'
f	double: Floating point number
p	void*: Address

# Examples - printf

<pre>char* s="hello, world"; double d=3.14;</pre>	Output
<pre>printf(":%s:", s);</pre>	:hello, world:
<pre>printf(":%10s:", s);</pre>	:hello, world:
<pre>printf(":%.10s:", s);</pre>	:hello, wor:
<pre>printf(":%.15s:", s);</pre>	:hello, world:
<pre>printf(":%-15s:", s);</pre>	:hello, world :
<pre>printf(":%15.10s:", s);</pre>	:      hello, wor:
<pre>printf(":%-15.10s:", s);</pre>	:hello, wor      :
<pre>printf(":%f:", d);</pre>	:3.140000:
<pre>printf(":%6.2f:", d);</pre>	:  3.14:

# scanf

```
int scanf( char* format, arg1, arg2, ... )
```

- Like reverse `printf`
- Reads characters from standard input
- Interprets them according to the format
- Stores the results into the memory location given in the arguments
- All arguments need to be pointers to valid memory locations
- Declared in `stdio.h`

```
double d;
```

```
scanf("%f", &d ); // Reads a floating point number
```

```
scanf("Result: %f", &d); // Expects "Result: " and a  
                          // floating point number
```

```
int sscanf( char* string, char* format, arg1, ... )
```

- Like `scanf` but parses `string` instead of standard input

```
#include <stdio.h>
```

```
int main() {
```

```
    char *s = "Result: 3.14";
```

```
    float d;
```

```
    sscanf ( s, "Result: %f", &d );
```

```
    printf( "d = %.2f\n", d );
```

```
}
```



# Open a file

Before a file can be read or written, it needs to be opened

```
FILE* fopen( char* name, char* mode )
```

- Declared in `stdio.h`
- `name` is the name of the file
- `mode` can be one of the following or a combination

Mode	Description
r	read
w	Write, old content is discarded
a	Append, old content is kept

```
FILE* fp = fopen( "my_file", "r" ); // read-only
```

```
fp = fopen( "my_file", "rw" ); // read and write
```

# Read from a file

```
int getc( FILE* fp )
```

- Returns the next character from `fp`

```
int fscanf( FILE* fp, char* format, arg1, arg2, ... )
```

- Like `scanf`, but reads from `fp`

```
char* fgets( char* line, int maxline, FILE* fp )
```

- Reads one line (including `'\n'`)
- At most `maxline-1` characters are read
- The characters are stored in `line`
- The user has to allocate the buffer before
- Returns `NULL` in case of error, else `line` is returned
- The line is terminated with `'\0'`

# Write to a file

```
int putc( int c, FILE* fp )
```

- Writes one character to fp

```
int fprintf( FILE* fp, char* format, ... )
```

- Like printf, but writes to fp

```
int fputs( char* line, FILE* fp )
```

- Writes a string to fp
- Does not need to contain a newline
- Returns the number of written characters

# Close a file

Closing a file frees system resources

Maximum number of open files

Flush buffers

```
int fclose( FILE* fp )
```

# Example – copy

```
#include <stdio.h>

int main(int argc, char** argv) {
    if (argc < 3) {
        printf("Usage: %s source destination\n", argv[0]);
        return 1;
    }

    FILE* source = fopen( argv[1], "r" );
    FILE* dest = fopen( argv[2], "w" );
    char buffer[256];
    while ( fgets(buffer, 256, source) != NULL ) fputs(buffer, dest);
    fclose( source );
    fclose( dest );
}
```

# Read and write formatted binary data

```
size_t fread ( void* ptr, size_t size,  
               size_t count, FILE * fp )
```

- Reads `count` elements of size `size` from `fp`
- The user has to provide a buffer `ptr` that has at least `size * count` bytes
- Returns the number of bytes read

```
size_t fwrite ( const void * ptr, size_t size,  
                size_t count, FILE * fp )
```

- Writes `count` elements of size `size` from `ptr` to `fp`
- Returns the number of bytes written

# Stdin, stdout, stderr

`stdio.h` defines three constant `FILE*` variables

- `stdin` is the standard input stream
- `stdout` is the standard output stream
- `stderr` is the standard error stream
  - By default, `stderr` prints to the screen
  - Writing errors to `stderr` prints them even if `stdout` is redirected

It is possible to use them with file input/output

- In fact `printf`, `scanf`, etc. are only a redirect to `fprintf`, `fscanf`, etc.

```
fprintf( stdout, "hello world\n" );
```

# fseek

Usually, you read/write a file in sequential order

`fseek` allows to set the current position in a stream

```
int fseek ( FILE * fp, long int offset, int origin )
```

The new position is `offset` bytes from `origin`

`origin` is one of the following constants

Constant	Reference position
SEEK_SET	The beginning of the file
SEEK_CUR	The current position
SEEK_END	The end of the file



# ftell

```
long int ftell ( FILE * stream )
```

- Returns the current position in a stream

# Get the file size

```
#include <stdio.h>

int main()
{
    FILE* fp = fopen( "myfile", "r" );
    fseek( fp, 0, SEEK_END );
    long int length = ftell( fp );
    fclose( fp );
}
```

# Status of a stream

```
int ferror ( FILE * stream )
```

- Returns true if an error occurred on a stream

```
int feof ( FILE * stream )
```

- Returns true if the end of a file was reached

# The C preprocessor

The C preprocessor parses the source code before compilation

It performs text substitutions and modifications

Preprocessor directives control actions of the preprocessor

The `#include` directive was already introduced

- Inserts the content of a file at the position of the directive

# #define directive

```
#define macro definition
```

Defines a macro

The pre-processor will substitute all occurrences of *macro* by *definition*

It is often used to define constants

The value is set at one place

Makes sure that it is changed at all occurrences

```
#define BUF_SIZE 16384
```

```
char buf[ BUF_SIZE ];
```

```
int i;
```

```
for( i = 0; i < BUF_SIZE; i++ ) buf[ i ] = i;
```

# #define with parameters

A `define`-directive can have parameters

The text of the parameter is put at the place in the definition where the parameter occurs

Put the parameter in brackets to make sure that the expression that is passed is evaluated correctly and does not interfere with the macro operation

```
#define MAX( a, b ) ( (a) > (b) ? (a) : (b) )
```

```
int d = MAX( d, 5*d-6 );
```

Is replaced to

```
int d = ( (d) > (5*d-6) ? (d) : (5*d-6) );
```

# Conditional compilation (1)

```
#if condition  
// some source code  
#else  
// more source code  
#endif
```

The preprocessor evaluates *condition* at compile time

- *Condition* must be a constant

If it is false the lines between `#if` and `#else` are removed

Otherwise the lines between `#else` and `#endif` are removed

The `#else` is optional

# Conditional compilation (2)

```
#ifdef macro
```

- True if *macro* was defined

```
#ifndef macro
```

- True if *macro* is undefined

Typical use case to avoid double definitions in header files

```
#ifndef MY_HEADER_FILE_H
```

```
#define MY_HEADER_FILE_H
```

```
// All declarations
```

```
#endif
```



The introduction covered the most important parts

Many details are not covered by the introduction

Some topics not covered are (incomplete list):

- Function pointers
- Variable length argument lists
- Bit fields
- Bit-wise operators
- Enums
- Unions

# Important differences between standards

## C99

- Free placement of variable declarations
- Variable declaration in first expression of for-loop

```
for( int i=0; i<10; i++)
```
- Definition of integer types with fixed size in `stdint.h`

```
int32_t, uint64_t, int16_t, ...
```
- Definition of `bool`, `true` and `false` in `stdbool.h`

## C11

- Multithreading support
- Removal of `gets()`
- Definition of larger character types for Unicode support