



USER
SPACE



**DEFINE
DATA
SOURCES**

```
SELECT products.value, count(*) AS productCount
FROM addresses
JOIN (
  LANG cypher
  MATCH ({id: $myId})-[:hasFriend]->(friend)
  RETURN friend.id AS id
) friends ON friends.id = addresses.customerId
JOIN LATERAL (
  lang xquery
  $invoices/Invoice[PersonId=$friends.id]/Orderline[0]/productId
) products
WHERE addresses.city = 'Prague' OR addresses.city = ANY(
  SELECT city FROM addresses WHERE customerId = :myId
)
GROUP BY products.value
HAVING productCount > 2
```

QUERY

RESULT


A	B	C	D
1	2	3	4
19	23	32	12

SERVICES

LOAD DATA
FROM VARIOUS
(MULTI-MODEL)
SOURCES

PARSING

**SYNTACTIC
TREE**

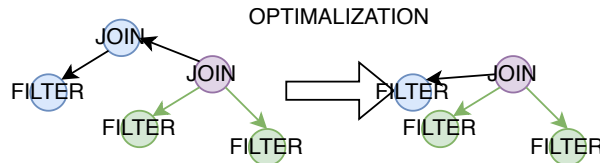

OPTIMIZATION

**RETURN
RESULT**

**QUERY
EXECUTION**

IN-
MEMORY
STORAGE

Data are loaded in unifying
object-oriented
representation
(JAVASCRIPT) in shared
memory

