


Customer	id	name	surname
	1	Mary	Smith
	2	John	Newlin
	3	Anne	Maxwell

Orders	id	pid	oid	price	quantity	street	city	postCode
	1	P5	2023001	350	1	Ke Karlovu	Prague	110 00
	1	P7	2023001	250	1	Ke Karlovu	Prague	110 00
	2	P7	2023002	275	2	Technická	Prague	162 00

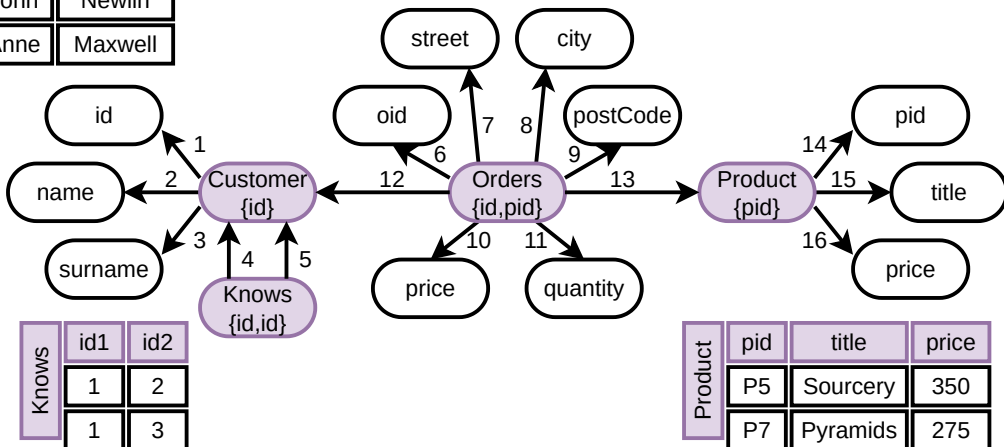

Knows	id1	id2
	1	2
	1	3

Product	pid	title	price
	P5	Sourcery	350
	P7	Pyramids	275

```

SELECT {
  _:knows friend ?friendA ;
    friend ?friendB .
  ?friendA fName ?friendAFName ;
    lName ?friendALName .
  ?friendB fName ?friendBFName ;
    lName ?friendBLName .
} WHERE {
  ?friendA -4/5 ?friendB .
  ?friendA 2 ?friendAFName ;
    3 ?friendALName .
  ?friendB 2 ?friendBFName ;
    3 ?friendBLName .
  FILTER(?friendA < ?friendB)
}

```

```

SELECT c1.name, c1.surname, c2.name,
       c2.surname
FROM Knows k
JOIN Customer c1 ON k.id1 = c1.id
JOIN Customer c2 ON k.id2 = c2.id
WHERE c1.id < c2.id

```

q1

```

SELECT {
  SUM(?price) AS ?totalPrice .
} WHERE {
  ?orders 12 ?customer ;
    10 ?price .
  ?customer 2 "Anna" .
}
ORDER BY (?totalPrice) DESC
LIMIT 1

```

```

SELECT SUM(o.price) AS totalPrice
FROM Customer c
JOIN Orders o ON c.id = o.id
WHERE c.name = 'Anna'
ORDER BY totalPrice
LIMIT 1

```

q2