

KIT\_OBOC\_TEST\_DATATYPES\_1

					Measures	OBC_AMT	OBC_MAX
OBC_REG	OBC_REG (MIDDLE...	OBC_REG (DISPLAY_KEY_NC)	Description	ID			
AUS/NRD	AUS/NRD	NRD	AUS/NRD	AUS/NRD		DM49,996....	—
DE/BAW	DE/BAW	BAW	DE/BAW	DE/BAW		DM1,102,7...	1,134.620 KG
DE/BAY	DE/BAY	BAY	DE/BAY	DE/BAY		DM1,068,7...	1,183.430 KG
DE/SAC	DE/SAC	SAC	DE/SAC	DE/SAC		DM1,428,5...	1,169.430 KG
Totals						DM3,649,9...	1,183.430 KG

Figure 47 Attributes Displayed as ResultMemberInfo Properties

### 5.8.3.1 Retrieving Visible Dimension Properties

You can retrieve additional dimension properties, the visible dimension properties, that were configured in the *Builder* panel at design time using the Data Source script API.

Note: Currently, this is supported only by data sources of Table widgets.

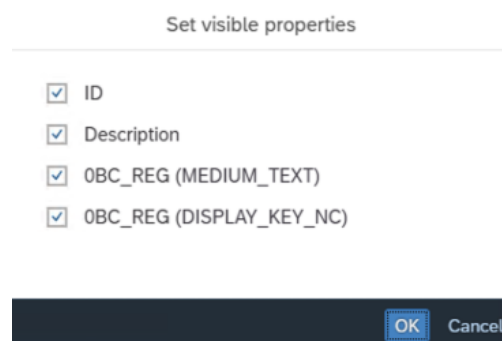


Figure 48 Visible Properties

The method `getResultMember()` returns an `ResultMemberInfo` object. It can contain the property `properties` that contains the visible properties. Or more formally:

```
Table_1.getDataSource().getResultMember(dimension: String | DimensionInfo,
selection: Selection) : ResultMemberInfo
```

```
// Property "properties" contains information on the visible properties
ResultMemberInfo {
  id: string;
  description: string;
  parentId: string;
  properties?: {
    [key: string]: [string]
  }
}
```