

```

    [key: string]: [string];
  }

  DataContext {
    id: string
    description: string
    formattedValue: string
    rawValue: string
    parentId: string
    properties?: { // "properties" doesn't contain "id" or "description"
      [key: string]: [string]
    }
  }
}

```

Example 1: Get a result set when no input parameter is specified

Here is an example that shows the result when no input parameter is specified: All data points of [Chart_1](#) are returned. Dimension context includes parent information if it has a hierarchy structure. Measure context includes [formattedValue](#) and [rawValue](#).

The below chart shows *Gross Margin per Location*. *Include Parent Levels* has been checked in the *Builder* panel.

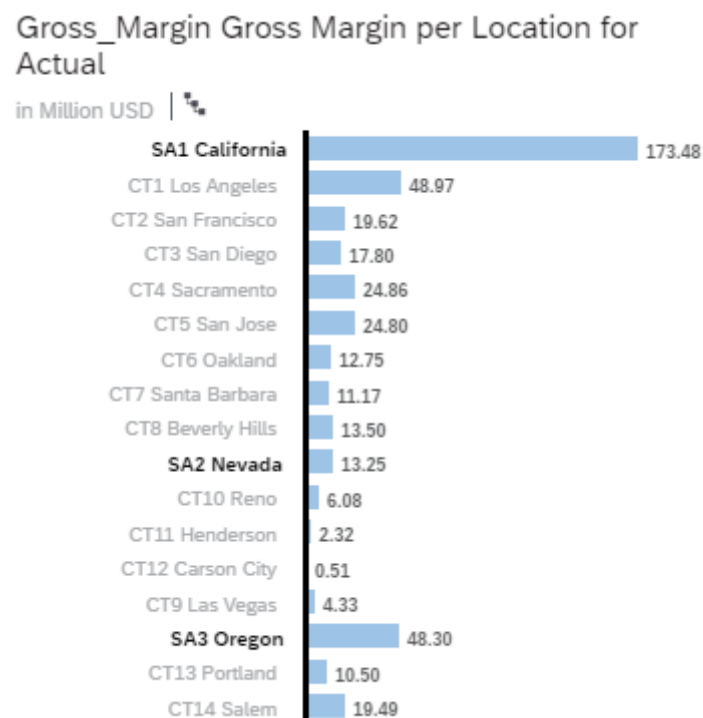


Figure 36 *Gross Margin per Location* Chart

```

Chart_1.getDataSource().getResultSet();

// ResultSet[].
// Both CT1 and CT2 have parentId "SA1". The result set is partially listed.
[ {
  "@MeasureDimension": {

```