

PROJECT: CourierXpress
GROUP NO: 01 BATCH: T3.2511.M0

Repository: <https://github.com/tuanpham1993gif/ReactCourierEpress.git>

A. SYSTEM REQUIREMENTS:

Sr.	Item	Description
1.	Operating system	Windows 10, 11, macOS, or Linux.
2.	Hardware	CPU 2 Cores or better with 4 Gigabytes of RAM or better.
3.	Fonts	Standard font Unicode: Arial, Tahoma, etc.
4.	Other requirement	- PHP >= 8.2 - Composer (Package Manager) - Node.js & NPM (version 18+) - Database Server: XAMPP (MySQL) - Git - A working internet connection.

Notes:

- Do not install IDEs (Integrated Development Environment) on the system such as MS Visual Code, Dreamweaver, Netbeans, etc.
- Always ensure that Apache and MySQL in XAMPP are started before proceeding with the next steps.

B. PROGRAM INSTALLATION

Step 1: Environment Preparation

- Install XAMPP (PHP 8.2+). Start Apache & MySQL.
- Install Composer (getcomposer.org).
- Install Node.js (nodejs.org).
- Install Git

- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

Step 2: Clone Project from GitHub

1. Open Command Prompt or Terminal
2. Navigate to your working directory
3. Clone the repository:
`git clone https://github.com/tuanpham1993-gif/ReactCourierEpress.git`
4. Navigate into the project folder
`cd ReactCourierEpress`

Step 3: Database Configuration

1. Access phpMyAdmin
Open browser and go to: `http://localhost/phpmyadmin`
2. Create Database
Click on "New" in the left sidebar
Enter database name: `courier_express`
Select Collation: `utf8mb4_unicode_ci`
Click "Create"

Import Database (if SQL file is provided)

Select the newly created database `courier_express`
Go to the Import tab
Click "Choose File" and select the SQL file from the project
Click Go/Import

Step 4: Configure Laravel Backend

1. Navigate to Backend Directory
2. Copy Environment File
3. Edit .env File
 - Open the .env file with a text editor
 - Update the following configuration:
`DB_CONNECTION=mysql`
`DB_HOST=127.0.0.1`
`DB_PORT=3306`
`DB_DATABASE=courier_express`
`DB_USERNAME=root`
`DB_PASSWORD=`
`SESSION_DRIVER=file`

(*) - Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
- The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

CACHE_STORE=file

- Install PHP Dependencies
composer install
- Generate Application Key
php artisan key:generate
- Run Database Migrations (if applicable)
php artisan migrate
- Seed Database (if seeder files exist)
- Clear Configuration Cache
php artisan config:clear
php artisan cache:clear

Step 5: Configure React Frontend

1. Navigate to Frontend Directory
2. Install Node Dependencie: npm install
3. Configure API Endpoint (if needed):
REACT_APP_API_URL=http://127.0.0.1:8000/api
4. Build the React Application: npm run build

Step 6: Launch the Application

- 1. Start Laravel Backend**
- 2. Start React Frontend**

C. Successful test

You can log in to test the application using the following default accounts:
Password for all accounts: 123456

- Admin Account: admin1
- Customer Account: thienbro
- Agent Account: thienbro55

Verification Screenshots

(*) - Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
- The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

- **Screenshot 1:** Image showing the successful execution of the php artisan serve and npm start command in Command Prompt.

```
Compiled successfully!

You can now view frontend-react in the browser.

  http://localhost:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

P1: npm start


```
C:\Users\ADMIN\Downloads\eproject1M\cour-backend>php artisan serve

INFO  Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server
```

P2: php artisan serve

- **Screenshot 2:** Image of the CourierXpress Home Page interface displayed in the web browser.

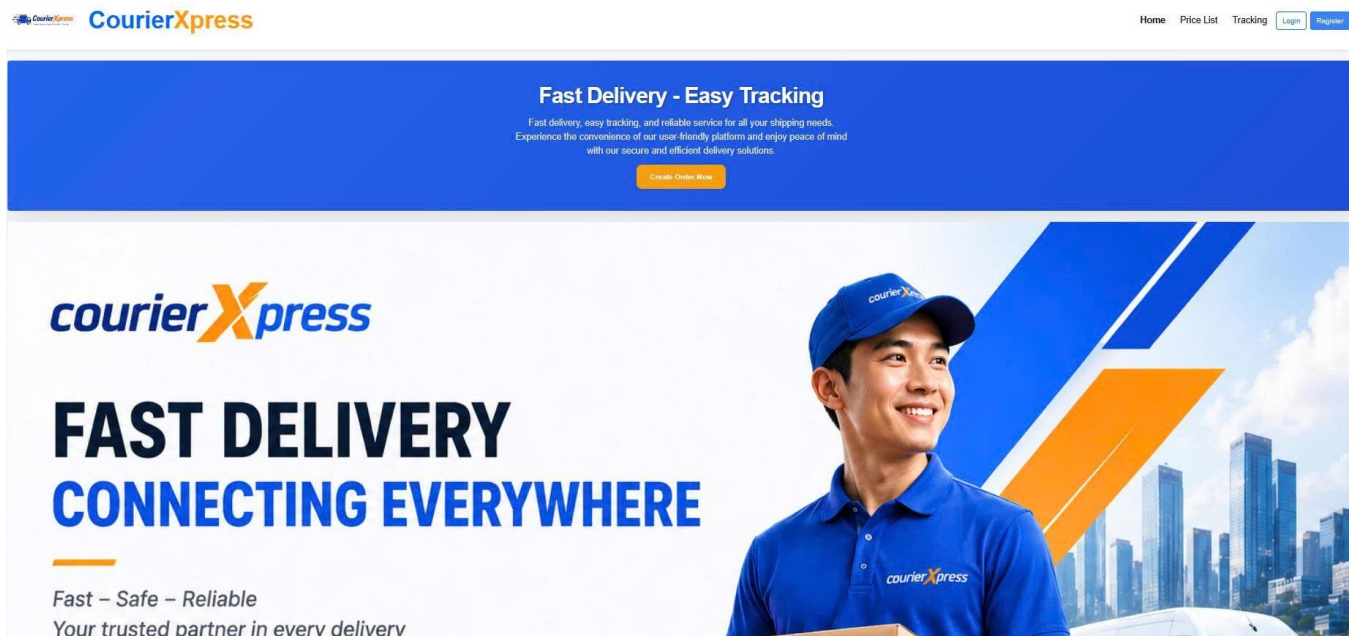

-
- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.