



XONOTIC ALL AROUND THE WORLD

Adrian Reber <areber@redhat.com>

TÜBIX 2017

CONTAINER MIGRATION

- runC (<https://runc.io/>) based containers
- criu (<https://criu.org/>) based migration
- Xonotic (<http://xonotic.org/>) in the container

LOCAL MIGRATION DEMO

Local Migration Demo

LOCAL MIGRATION SETUP

- `yum install --releasever 7.3 --installroot /runc/containers/xonotic/rootfs bash coreutils procps-ng iptools xonotic-server`
- `oci-runtime-tool generate --args "/usr/bin/darkplaces-dedicated" --args "-userdir" --args "/tmp" --network host --tmpfs /tmp --tmpfs /run --rootfs-readonly | jq 'del(.linux.seccomp)' > config.json`
- `runc run xonotic -d -b /runc/containers/xonotic/ &> /dev/null < /dev/null`
- RHEL 7.3
 - `runc-0.1.1-5.el7.x86_64`
 - `criu-2.3-2.el7.x86_64`



A map of Europe with green landmasses and blue water bodies. Black lines delineate national borders. Two red dots are placed on the border between France and Germany, with the labels 'Strasbourg' and 'Tuebingen' positioned to their left and right respectively. The dots are very close to each other, indicating a short distance between the two locations.

Strasbourg Tuebingen

REMOTE MIGRATION SETUP

- Layer 2 OpenVPN Tunnel
- Floating IP address using `keepalived`
- Pre-Copy Migration
- Still RHEL 7.3 kernel and `criu`
- Using `runC` git checkout

OPTIMIZATIONS - PRE-COPY

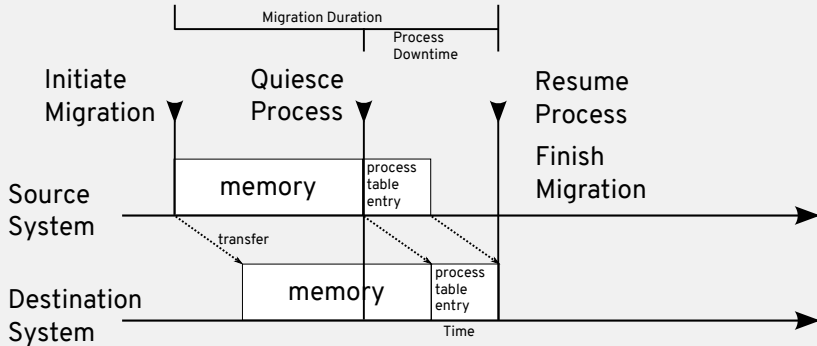


Figure: Pre-Copy Migration





FURTHER OPTIMIZATION

- Lazy Migration
 - Based on userfaultfd
 - Requires CRIU from `criu-dev` branch
 - Requires CRIU patches (most already posted)
 - Requires runC patches (only on my system)

OPTIMIZATIONS - POST-COPY

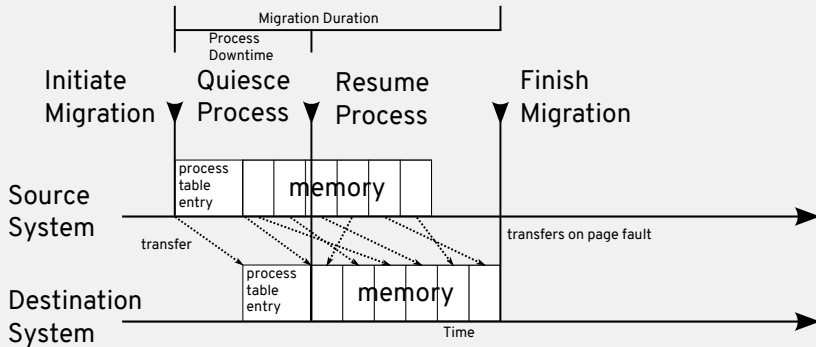


Figure: Post-Copy Migration



THANK YOU