

FORM

v5.0.0-beta.1-292-g4341c63

Generated by Doxygen 1.9.8

1 Data Structure Index	1
1.1 Data Structures	1
2 File Index	5
2.1 File List	5
3 Data Structure Documentation	7
3.1 AEdge Class Reference	7
3.1.1 Detailed Description	7
3.1.2 Constructor & Destructor Documentation	8
3.1.2.1 AEdge()	8
3.1.2.2 ~AEdge()	8
3.1.3 Field Documentation	8
3.1.3.1 cand	8
3.1.3.2 nodes	8
3.1.3.3 nlegs	8
3.1.3.4 ptcl	8
3.1.3.5 DUMMYPADDING	9
3.2 AllGlobals Struct Reference	9
3.2.1 Detailed Description	10
3.2.2 Field Documentation	10
3.2.2.1 M	10
3.2.2.2 Cc	10
3.2.2.3 S	10
3.2.2.4 R	10
3.2.2.5 N	11
3.2.2.6 O	11
3.2.2.7 P	11
3.2.2.8 T	11
3.2.2.9 X	11
3.3 ANode Class Reference	11
3.3.1 Detailed Description	12
3.3.2 Constructor & Destructor Documentation	12
3.3.2.1 ANode()	12
3.3.2.2 ~ANode()	12
3.3.3 Member Function Documentation	12
3.3.3.1 newleg()	12
3.3.4 Field Documentation	13
3.3.4.1 deg	13
3.3.4.2 nlegs	13
3.3.4.3 anodes	13
3.3.4.4 aedges	13
3.3.4.5 aelegs	13

3.3.4.6 cand	13
3.4 ARGBUFFER Struct Reference	14
3.4.1 Detailed Description	14
3.4.2 Field Documentation	14
3.4.2.1 buffer	14
3.4.2.2 dollar	14
3.4.2.3 size	15
3.4.2.4 type	15
3.4.2.5 dummy	15
3.5 Assign Class Reference	15
3.5.1 Detailed Description	17
3.5.2 Constructor & Destructor Documentation	17
3.5.2.1 Assign()	17
3.5.2.2 ~Assign()	17
3.5.3 Member Function Documentation	17
3.5.3.1 prCand()	17
3.5.3.2 checkAG()	17
3.5.3.3 assignAllVertices()	18
3.5.3.4 selectVertex()	18
3.5.3.5 selectVertexSimp()	18
3.5.3.6 selectLeg()	18
3.5.3.7 assignVertex()	18
3.5.3.8 allAssigned()	18
3.5.3.9 fromMGraph()	18
3.5.3.10 addEdge()	19
3.5.3.11 connect()	19
3.5.3.12 fillEGraph()	19
3.5.3.13 reordLeg()	19
3.5.3.14 getLegParticle()	19
3.5.3.15 legEdgeParticle()	20
3.5.3.16 legPart()	20
3.5.3.17 candPart()	20
3.5.3.18 selUnAssVertex()	20
3.5.3.19 selUnAssVertexSimp()	20
3.5.3.20 selUnAssLeg()	20
3.5.3.21 assignVertex()	21
3.5.3.22 assignPLeg()	21
3.5.3.23 isOrdPLeg()	21
3.5.3.24 detEdge()	21
3.5.3.25 candPartClassify()	21
3.5.3.26 updateCandNode()	21
3.5.3.27 checkOrderCpl()	22

3.5.3.28 isOrdLegs()	22
3.5.3.29 isIsomorphic()	22
3.5.3.30 cmpPermGraph()	22
3.5.3.31 cmpNodes()	22
3.5.3.32 edgeSym()	22
3.5.3.33 saveCouple()	23
3.5.3.34 restoreCouple()	23
3.5.3.35 subCouple()	23
3.5.3.36 checkCand()	23
3.5.3.37 checkNode()	23
3.5.4 Field Documentation	23
3.5.4.1 egraph	23
3.5.4.2 mgraph	24
3.5.4.3 sproc	24
3.5.4.4 proc	24
3.5.4.5 model	24
3.5.4.6 opt	24
3.5.4.7 astack	24
3.5.4.8 pnclass	24
3.5.4.9 orbits	24
3.5.4.10 nNodes	25
3.5.4.11 nEdges	25
3.5.4.12 nExtern	25
3.5.4.13 nETotal	25
3.5.4.14 nAGraphs	25
3.5.4.15 wAGraphs	25
3.5.4.16 nAOPI	25
3.5.4.17 wAOPI	25
3.5.4.18 nodes	26
3.5.4.19 edges	26
3.5.4.20 checkpoint0	26
3.5.4.21 cplleft	26
3.6 AStack Class Reference	26
3.6.1 Detailed Description	27
3.6.2 Constructor & Destructor Documentation	27
3.6.2.1 AStack()	27
3.6.2.2 ~AStack()	27
3.6.3 Member Function Documentation	27
3.6.3.1 setAGraph()	27
3.6.3.2 checkPoint()	28
3.6.3.3 restore()	28
3.6.3.4 restoreMsg()	28

3.6.3.5 prStack()	28
3.6.3.6 pushNode()	28
3.6.3.7 pushEdge()	28
3.6.4 Field Documentation	28
3.6.4.1 agraph	28
3.6.4.2 nStack	29
3.6.4.3 nStackP	29
3.6.4.4 nSize	29
3.6.4.5 eStack	29
3.6.4.6 eStackP	29
3.6.4.7 eSize	29
3.7 bit_field Struct Reference	29
3.7.1 Detailed Description	30
3.7.2 Field Documentation	30
3.7.2.1 bit_0	30
3.7.2.2 bit_1	30
3.7.2.3 bit_2	30
3.7.2.4 bit_3	30
3.7.2.5 bit_4	31
3.7.2.6 bit_5	31
3.7.2.7 bit_6	31
3.7.2.8 bit_7	31
3.8 BrAcKeTiNdEx Struct Reference	31
3.8.1 Detailed Description	32
3.8.2 Field Documentation	32
3.8.2.1 start	32
3.8.2.2 next	32
3.8.2.3 bracket	32
3.8.2.4 termsinbracket	32
3.9 BracketInfo Struct Reference	33
3.9.1 Detailed Description	33
3.9.2 Constructor & Destructor Documentation	33
3.9.2.1 BracketInfo()	33
3.9.3 Member Function Documentation	34
3.9.3.1 operator<()	34
3.9.4 Field Documentation	34
3.9.4.1 pattern	34
3.9.4.2 num_terms	34
3.9.4.3 dummy	34
3.9.4.4 p	34
3.10 BrAcKeTiNfO Struct Reference	35
3.10.1 Detailed Description	35

3.10.2 Field Documentation	35
3.10.2.1 indexbuffer	35
3.10.2.2 bracketbuffer	36
3.10.2.3 bracketbuffersize	36
3.10.2.4 indexbuffersize	36
3.10.2.5 bracketfill	36
3.10.2.6 indexfill	36
3.10.2.7 SortType	36
3.11 bufIPstruct Struct Reference	37
3.11.1 Detailed Description	37
3.11.2 Field Documentation	37
3.11.2.1 i	37
3.11.2.2 e	38
3.12 C_const Struct Reference	38
3.12.1 Detailed Description	42
3.12.2 Field Documentation	42
3.12.2.1 separators	42
3.12.2.2 StoreFileSize	42
3.12.2.3 dollarnames	43
3.12.2.4 exprnames	43
3.12.2.5 varnames	43
3.12.2.6 ChannelList	43
3.12.2.7 DubiousList	43
3.12.2.8 FunctionList	43
3.12.2.9 ExpressionList	44
3.12.2.10 IndexList	44
3.12.2.11 SetElementList	44
3.12.2.12 SetList	44
3.12.2.13 SymbolList	44
3.12.2.14 VectorList	44
3.12.2.15 PotModDolList	45
3.12.2.16 ModOptDolList	45
3.12.2.17 TableBaseList	45
3.12.2.18 cbufList	45
3.12.2.19 AutoSymbolList	45
3.12.2.20 AutoIndexList	45
3.12.2.21 AutoVectorList	45
3.12.2.22 AutoFunctionList	46
3.12.2.23 autonames	46
3.12.2.24 Symbols	46
3.12.2.25 Indices	46
3.12.2.26 Vectors	46

3.12.2.27 Functions	46
3.12.2.28 activenames	46
3.12.2.29 Streams	47
3.12.2.30 CurrentStream	47
3.12.2.31 SwitchArray	47
3.12.2.32 models	47
3.12.2.33 SwitchHeap	47
3.12.2.34 termstack	47
3.12.2.35 termsortstack	47
3.12.2.36 cmod	48
3.12.2.37 powmod	48
3.12.2.38 modpowers	48
3.12.2.39 halfmod	48
3.12.2.40 ProtoType	48
3.12.2.41 WildC	48
3.12.2.42 IfHeap	48
3.12.2.43 IfCount	49
3.12.2.44 IfStack	49
3.12.2.45 iBuffer	49
3.12.2.46 iPointer	49
3.12.2.47 iStop	49
3.12.2.48 LabelNames	49
3.12.2.49 FixIndices	50
3.12.2.50 termsumcheck	50
3.12.2.51 WildcardNames	50
3.12.2.52 Labels	50
3.12.2.53 tokens	50
3.12.2.54 toptokens	50
3.12.2.55 endoftokens	51
3.12.2.56 tokenarglevel	51
3.12.2.57 modinverses	51
3.12.2.58 Fortran90Kind	51
3.12.2.59 MultiBracketBuf	51
3.12.2.60 extrasym	51
3.12.2.61 doloopstack	51
3.12.2.62 doloopnest	52
3.12.2.63 CheckpointRunAfter	52
3.12.2.64 CheckpointRunBefore	52
3.12.2.65 IfSumCheck	52
3.12.2.66 CommuteInSet	52
3.12.2.67 TestValue	52
3.12.2.68 argstack	52

3.12.2.69 insidestack	53
3.12.2.70 inexprstack	53
3.12.2.71 iBufferSize	53
3.12.2.72 TransEname	53
3.12.2.73 ProcessBucketSize	53
3.12.2.74 mProcessBucketSize	53
3.12.2.75 CModule	53
3.12.2.76 ThreadBucketSize	53
3.12.2.77 CheckpointStamp	54
3.12.2.78 CheckpointInterval	54
3.12.2.79 cbufnum	54
3.12.2.80 AutoDeclareFlag	54
3.12.2.81 NoShowInput	54
3.12.2.82 ShortStats	54
3.12.2.83 compiletype	54
3.12.2.84 firstconstindex	55
3.12.2.85 insidefirst	55
3.12.2.86 minsidefirst	55
3.12.2.87 wildflag	55
3.12.2.88 NumLabels	55
3.12.2.89 MaxLabels	55
3.12.2.90 IDefDim	55
3.12.2.91 IDefDim4	55
3.12.2.92 NumWildcardNames	56
3.12.2.93 WildcardBufferSize	56
3.12.2.94 MaxIf	56
3.12.2.95 NumStreams	56
3.12.2.96 MaxNumStreams	56
3.12.2.97 firstctypemessage	56
3.12.2.98 tablecheck	56
3.12.2.99 idoption	56
3.12.2.100 BottomLevel	57
3.12.2.101 CompileLevel	57
3.12.2.102 TokensWriteFlag	57
3.12.2.103 UnsureDollarMode	57
3.12.2.104 outsidefun	57
3.12.2.105 funpowers	57
3.12.2.106 WarnFlag	57
3.12.2.107 StatsFlag	57
3.12.2.108 NamesFlag	58
3.12.2.109 CodesFlag	58
3.12.2.110 SetupFlag	58

3.12.2.111 SortType	58
3.12.2.112 ISortType	58
3.12.2.113 ThreadStats	58
3.12.2.114 FinalStats	58
3.12.2.115 OldParallelStats	58
3.12.2.116 ThreadsFlag	59
3.12.2.117 ThreadBalancing	59
3.12.2.118 ThreadSortFileSynch	59
3.12.2.119 ProcessStats	59
3.12.2.120 BracketNormalize	59
3.12.2.121 maxtermlevel	59
3.12.2.122 dumnumflag	59
3.12.2.123 bracketindexflag	59
3.12.2.124 parallelflag	60
3.12.2.125 mparallelflag	60
3.12.2.126 inparallelflag	60
3.12.2.127 partodoflag	60
3.12.2.128 properorderflag	60
3.12.2.129 vetofilling	60
3.12.2.130 tablefilling	60
3.12.2.131 vetotablebasefill	60
3.12.2.132 exprfillwarning	61
3.12.2.133 lhdollarflag	61
3.12.2.134 NoCompress	61
3.12.2.135 IsFortran90	61
3.12.2.136 MultiBracketLevels	61
3.12.2.137 topolynomialflag	61
3.12.2.138 ffbufnum	61
3.12.2.139 OldFactArgFlag	61
3.12.2.140 MemDebugFlag	62
3.12.2.141 OldGCDflag	62
3.12.2.142 WTimeStatsFlag	62
3.12.2.143 SortReallocateFlag	62
3.12.2.144 PrintBacktraceFlag	62
3.12.2.145 FlintPolyFlag	62
3.12.2.146 HumanStatsFlag	62
3.12.2.147 doloopstacksize	62
3.12.2.148 dolooplevel	63
3.12.2.149 CheckpointFlag	63
3.12.2.150 SizeCommutelnSet	63
3.12.2.151 origin	63
3.12.2.152 vectorlikeLHS	63

3.12.2.153 nummodels	63
3.12.2.154 modelspace	63
3.12.2.155 ModelLevel	64
3.12.2.156 ShortStatsMax	64
3.12.2.157 InnerTest	64
3.12.2.158 argsumcheck	64
3.12.2.159 insidesumcheck	64
3.12.2.160 inexprsumcheck	64
3.12.2.161 RepSumCheck	64
3.12.2.162 IUniTrace	64
3.12.2.163 RepLevel	65
3.12.2.164 arglevel	65
3.12.2.165 insidelevel	65
3.12.2.166 inexprlevel	65
3.12.2.167 termlevel	65
3.12.2.168 MustTestTable	65
3.12.2.169 DumNum	65
3.12.2.170 ncmmod	65
3.12.2.171 npowmod	66
3.12.2.172 modmode	66
3.12.2.173 nhalfmod	66
3.12.2.174 DirtPow	66
3.12.2.175 IUnitTrace	66
3.12.2.176 NwildC	66
3.12.2.177 ComDefer	66
3.12.2.178 CollectFun	66
3.12.2.179 AltCollectFun	67
3.12.2.180 OutputMode	67
3.12.2.181 Crumpows	67
3.12.2.182 OutputSpaces	67
3.12.2.183 OutNumberType	67
3.12.2.184 DidClean	67
3.12.2.185 IfLevel	67
3.12.2.186 WhileLevel	67
3.12.2.187 SwitchLevel	68
3.12.2.188 SwitchInArray	68
3.12.2.189 MaxSwitch	68
3.12.2.190 LogHandle	68
3.12.2.191 LineLength	68
3.12.2.192 StoreHandle	68
3.12.2.193 HideLevel	68
3.12.2.194 IPolyFun	68

3.12.2.195 IPolyFunInv	69
3.12.2.196 IPolyFunType	69
3.12.2.197 IPolyFunExp	69
3.12.2.198 IPolyFunVar	69
3.12.2.199 IPolyFunPow	69
3.12.2.200 SymChangeFlag	69
3.12.2.201 CollectPercentage	69
3.12.2.202 extrasymbols	69
3.12.2.203 PolyRatFunChanged	70
3.12.2.204 ToBeInFactors	70
3.12.2.205 Commercial	70
3.12.2.206 debugFlags	70
3.13 CbUf Struct Reference	70
3.13.1 Detailed Description	71
3.13.2 Field Documentation	71
3.13.2.1 Buffer	71
3.13.2.2 Top	71
3.13.2.3 Pointer	72
3.13.2.4 lhs	72
3.13.2.5 rhs	72
3.13.2.6 CanCommu	72
3.13.2.7 NumTerms	72
3.13.2.8 numdum	73
3.13.2.9 dimension	73
3.13.2.10 boomlijst	73
3.13.2.11 BufferSize	73
3.13.2.12 numlhs	73
3.13.2.13 numrhs	73
3.13.2.14 maxlhs	74
3.13.2.15 maxrhs	74
3.13.2.16 mnumlhs	74
3.13.2.17 mnumrhs	74
3.13.2.18 numtree	74
3.13.2.19 rootnum	74
3.13.2.20 MaxTreeSize	74
3.14 ChAnNeL Struct Reference	75
3.14.1 Detailed Description	75
3.14.2 Field Documentation	75
3.14.2.1 name	75
3.14.2.2 handle	75
3.15 COST Struct Reference	75
3.15.1 Detailed Description	76

3.15.2 Field Documentation	76
3.15.2.1 add	76
3.15.2.2 mul	76
3.15.2.3 div	76
3.15.2.4 pow	76
3.16 CSEEq Struct Reference	76
3.16.1 Detailed Description	76
3.16.2 Member Function Documentation	77
3.16.2.1 operator()()	77
3.17 CSEHash Struct Reference	77
3.17.1 Detailed Description	77
3.17.2 Member Function Documentation	77
3.17.2.1 operator()()	77
3.18 dbase Struct Reference	78
3.18.1 Detailed Description	78
3.18.2 Field Documentation	78
3.18.2.1 info	78
3.18.2.2 mode	79
3.18.2.3 tablenameessize	79
3.18.2.4 topnumber	79
3.18.2.5 tablenameefill	79
3.18.2.6 rwmode	79
3.18.2.7 iblocks	79
3.18.2.8 nblocks	79
3.18.2.9 handle	79
3.18.2.10 name	80
3.18.2.11 fullname	80
3.18.2.12 tablenames	80
3.19 DGraph Struct Reference	80
3.19.1 Detailed Description	81
3.19.2 Field Documentation	81
3.19.2.1 nnodes	81
3.19.2.2 nedges	81
3.19.2.3 nodes	81
3.19.2.4 edges	81
3.20 DICTIONARY Struct Reference	81
3.20.1 Detailed Description	82
3.20.2 Field Documentation	82
3.20.2.1 elements	82
3.20.2.2 name	82
3.20.2.3 sizeelements	82
3.20.2.4 numelements	82

3.20.2.5 numbers	82
3.20.2.6 variables	83
3.20.2.7 characters	83
3.20.2.8 funwith	83
3.20.2.9 gnumelements	83
3.20.2.10 ranges	83
3.21 DICTIONARY_ELEMENT Struct Reference	83
3.21.1 Detailed Description	83
3.21.2 Field Documentation	84
3.21.2.1 lhs	84
3.21.2.2 rhs	84
3.21.2.3 type	84
3.21.2.4 size	84
3.22 DiStRiBuTe Struct Reference	84
3.22.1 Detailed Description	85
3.22.2 Field Documentation	85
3.22.2.1 obj1	85
3.22.2.2 obj2	85
3.22.2.3 out	85
3.22.2.4 sign	85
3.22.2.5 n1	85
3.22.2.6 n2	85
3.22.2.7 n	86
3.22.2.8 cycle	86
3.23 DNode Struct Reference	86
3.23.1 Detailed Description	86
3.23.2 Field Documentation	86
3.23.2.1 extloop	86
3.23.2.2 intrct	86
3.24 dollar_buf Struct Reference	87
3.24.1 Detailed Description	87
3.25 DoLIaRS Struct Reference	87
3.25.1 Detailed Description	87
3.25.2 Field Documentation	88
3.25.2.1 where	88
3.25.2.2 factors	88
3.25.2.3 size	88
3.25.2.4 name	88
3.25.2.5 type	88
3.25.2.6 node	88
3.25.2.7 index	88
3.25.2.8 zero	89

3.25.2.9 numdummies	89
3.25.2.10 nfactors	89
3.26 DoLoOp Struct Reference	89
3.26.1 Detailed Description	90
3.26.2 Field Documentation	90
3.26.2.1 p	90
3.26.2.2 name	90
3.26.2.3 vars	91
3.26.2.4 contents	91
3.26.2.5 dollarname	91
3.26.2.6 startlinenumber	91
3.26.2.7 firstnum	91
3.26.2.8 lastnum	91
3.26.2.9 incnum	91
3.26.2.10 type	92
3.26.2.11 NoShowInput	92
3.26.2.12 errorsinloop	92
3.26.2.13 firstloopcall	92
3.26.2.14 firstdollar	92
3.26.2.15 lastdollar	92
3.26.2.16 incdollar	92
3.26.2.17 NumPreTypes	92
3.26.2.18 PriefLevel	93
3.26.2.19 PreSwitchLevel	93
3.27 DuBiOuS Struct Reference	93
3.27.1 Detailed Description	93
3.27.2 Field Documentation	93
3.27.2.1 name	93
3.27.2.2 node	93
3.27.2.3 dummy	94
3.28 ECand Class Reference	94
3.28.1 Detailed Description	94
3.28.2 Constructor & Destructor Documentation	94
3.28.2.1 ECand()	94
3.28.2.2 ~ECand()	94
3.28.3 Member Function Documentation	95
3.28.3.1 prECand()	95
3.28.4 Field Documentation	95
3.28.4.1 det	95
3.28.4.2 nplist	95
3.28.4.3 plist	95
3.29 EEdge Class Reference	95

3.29.1 Detailed Description	96
3.29.2 Constructor & Destructor Documentation	96
3.29.2.1 EEdge() [1/2]	96
3.29.2.2 EEdge() [2/2]	96
3.29.2.3 ~EEdge()	97
3.29.3 Member Function Documentation	97
3.29.3.1 copy()	97
3.29.3.2 setId()	97
3.29.3.3 print()	97
3.29.3.4 setType()	97
3.29.3.5 setLMom()	97
3.29.3.6 setEMom()	98
3.29.4 Field Documentation	98
3.29.4.1 egraph	98
3.29.4.2 id	98
3.29.4.3 ext	98
3.29.4.4 ptcl	98
3.29.4.5 deleted	98
3.29.4.6 nodes	98
3.29.4.7 nlegs	99
3.29.4.8 emom	99
3.29.4.9 lmom	99
3.29.4.10 extMom	99
3.29.4.11 momset	99
3.29.4.12 momdir	99
3.29.4.13 cut	99
3.29.4.14 visited	99
3.29.4.15 conid	100
3.29.4.16 edtype	100
3.29.4.17 opicomp	100
3.29.4.18 dir	100
3.29.4.19 DUMMYPADDING	100
3.30 EFLine Class Reference	100
3.30.1 Detailed Description	101
3.30.2 Constructor & Destructor Documentation	101
3.30.2.1 EFLine()	101
3.30.3 Member Function Documentation	101
3.30.3.1 print()	101
3.30.4 Field Documentation	101
3.30.4.1 elist	101
3.30.4.2 ftype	101
3.30.4.3 fkind	101

3.30.4.4 nlist	102
3.31 EGraph Class Reference	102
3.31.1 Detailed Description	104
3.31.2 Constructor & Destructor Documentation	104
3.31.2.1 EGraph()	104
3.31.2.2 ~EGraph()	104
3.31.3 Member Function Documentation	104
3.31.3.1 copy()	104
3.31.3.2 print()	104
3.31.3.3 printPy()	105
3.31.3.4 fromDGraph()	105
3.31.3.5 fromMGraph()	105
3.31.3.6 optQGrafM()	105
3.31.3.7 optQGrafA()	105
3.31.3.8 isOptE()	105
3.31.3.9 setExtern()	105
3.31.3.10 isExternal()	106
3.31.3.11 isFermion()	106
3.31.3.12 setExtLoop()	106
3.31.3.13 endSetExtLoop()	106
3.31.3.14 connComp()	106
3.31.3.15 connVisit()	106
3.31.3.16 biconnE()	106
3.31.3.17 biinitE()	107
3.31.3.18 bisearchE()	107
3.31.3.19 findRoot()	107
3.31.3.20 dirEdge()	107
3.31.3.21 extMomConsv()	107
3.31.3.22 cmpMom()	107
3.31.3.23 groupLMom()	108
3.31.3.24 chkMomConsv()	108
3.31.3.25 prFLines()	108
3.31.3.26 getFLines()	108
3.31.3.27 fltrace()	108
3.31.3.28 addFLine()	108
3.31.3.29 legParticle()	109
3.31.4 Field Documentation	109
3.31.4.1 opt	109
3.31.4.2 model	109
3.31.4.3 proc	109
3.31.4.4 sproc	109
3.31.4.5 mgraph	109

3.31.4.6 econn	109
3.31.4.7 nodes	110
3.31.4.8 edges	110
3.31.4.9 mld	110
3.31.4.10 ald	110
3.31.4.11 sld	110
3.31.4.12 gSubld	110
3.31.4.13 assigned	110
3.31.4.14 fsign	110
3.31.4.15 nsym	111
3.31.4.16 esym	111
3.31.4.17 nsym1	111
3.31.4.18 extperm	111
3.31.4.19 multp	111
3.31.4.20 pld	111
3.31.4.21 sNodes	111
3.31.4.22 sEdges	111
3.31.4.23 sMaxdeg	112
3.31.4.24 sLoops	112
3.31.4.25 nNodes	112
3.31.4.26 nEdges	112
3.31.4.27 nExtern	112
3.31.4.28 maxdeg	112
3.31.4.29 nLoops	112
3.31.4.30 totalc	112
3.31.4.31 nopicomp	113
3.31.4.32 opi2plp	113
3.31.4.33 nopi2p	113
3.31.4.34 nadj2ptv	113
3.31.4.35 DUMMYPADDING	113
3.31.4.36 bidef	113
3.31.4.37 bilow	113
3.31.4.38 extMom	113
3.31.4.39 bconn	114
3.31.4.40 bicount	114
3.31.4.41 loopm	114
3.31.4.42 opiCount	114
3.31.4.43 flines	114
3.31.4.44 nFlines	114
3.31.4.45 DUMMYPADDING1	114
3.32 ENode Class Reference	115
3.32.1 Detailed Description	115

3.32.2 Constructor & Destructor Documentation	116
3.32.2.1 ENode() [1/2]	116
3.32.2.2 ENode() [2/2]	116
3.32.2.3 ~ENode()	116
3.32.3 Member Function Documentation	116
3.32.3.1 initAss()	116
3.32.3.2 setId()	116
3.32.3.3 copy()	116
3.32.3.4 setExtern()	117
3.32.3.5 setType()	117
3.32.3.6 print()	117
3.32.4 Field Documentation	117
3.32.4.1 egraph	117
3.32.4.2 edges	117
3.32.4.3 id	117
3.32.4.4 maxdeg	117
3.32.4.5 deg	118
3.32.4.6 extloop	118
3.32.4.7 ndtype	118
3.32.4.8 intrct	118
3.32.4.9 klow	118
3.32.4.10 visited	118
3.32.4.11 DUMMYPADDING	118
3.33 EStack Class Reference	119
3.33.1 Detailed Description	119
3.33.2 Constructor & Destructor Documentation	119
3.33.2.1 EStack()	119
3.33.2.2 ~EStack()	119
3.33.3 Member Function Documentation	119
3.33.3.1 print()	119
3.33.4 Field Documentation	119
3.33.4.1 edgen	119
3.33.4.2 det	120
3.33.4.3 nplist	120
3.33.4.4 plist	120
3.34 ExPrEsSiOn Struct Reference	120
3.34.1 Detailed Description	121
3.34.2 Field Documentation	121
3.34.2.1 onfile	121
3.34.2.2 prototype	121
3.34.2.3 size	121
3.34.2.4 renum	122

3.34.2.5 bracketinfo	122
3.34.2.6 newbracketinfo	122
3.34.2.7 renumlists	122
3.34.2.8 inmem	122
3.34.2.9 counter	122
3.34.2.10 name	122
3.34.2.11 hidelevel	123
3.34.2.12 vflags	123
3.34.2.13 printflag	123
3.34.2.14 status	123
3.34.2.15 replace	123
3.34.2.16 node	123
3.34.2.17 whichbuffer	123
3.34.2.18 namesize	123
3.34.2.19 compression	124
3.34.2.20 numdummies	124
3.34.2.21 numfactors	124
3.34.2.22 sizeprototype	124
3.34.2.23 uflags	124
3.35 FaCdOILaR Struct Reference	124
3.35.1 Detailed Description	124
3.35.2 Field Documentation	125
3.35.2.1 where	125
3.35.2.2 size	125
3.35.2.3 type	125
3.35.2.4 value	125
3.36 factorized_poly Class Reference	125
3.36.1 Detailed Description	126
3.36.2 Member Function Documentation	126
3.36.2.1 add_factor()	126
3.36.2.2 tostring()	126
3.36.3 Field Documentation	126
3.36.3.1 factor	126
3.36.3.2 power	126
3.37 FGInput Struct Reference	126
3.37.1 Detailed Description	127
3.37.2 Field Documentation	127
3.37.2.1 ninitl	127
3.37.2.2 initln	127
3.37.2.3 initlc	127
3.37.2.4 nfinal	127
3.37.2.5 finaln	127

3.37.2.6 finalc	127
3.37.2.7 coupl	128
3.38 FiLe Struct Reference	128
3.38.1 Detailed Description	129
3.38.2 Field Documentation	129
3.38.2.1 PPosition	129
3.38.2.2 filesize	129
3.38.2.3 PObuffer	129
3.38.2.4 POstop	129
3.38.2.5 POfill	129
3.38.2.6 POfull	129
3.38.2.7 name	130
3.38.2.8 numblocks	130
3.38.2.9 inbuffer	130
3.38.2.10 POsize	130
3.38.2.11 handle	130
3.38.2.12 active	130
3.39 FiLeDaTa Struct Reference	131
3.39.1 Detailed Description	131
3.39.2 Field Documentation	131
3.39.2.1 Index	131
3.39.2.2 Fill	132
3.39.2.3 Position	132
3.39.2.4 Handle	132
3.39.2.5 dirtyflag	132
3.40 FiLeInDeX Struct Reference	132
3.40.1 Detailed Description	133
3.40.2 Field Documentation	133
3.40.2.1 next	133
3.40.2.2 number	133
3.40.2.3 expression	133
3.40.2.4 empty	134
3.41 FixedGlobals Struct Reference	134
3.41.1 Detailed Description	134
3.41.2 Field Documentation	134
3.41.2.1 Operation	134
3.41.2.2 OperaFind	135
3.41.2.3 VarType	135
3.41.2.4 ExprStat	135
3.41.2.5 FunNam	135
3.41.2.6 swmes	135
3.41.2.7 fname	135

3.41.2.8 fname2	135
3.41.2.9 s_one	135
3.41.2.10 framebase	136
3.41.2.11 fname2base	136
3.41.2.12 framesize	136
3.41.2.13 fname2size	136
3.41.2.14 cTable	136
3.42 fixedset Struct Reference	136
3.42.1 Detailed Description	136
3.42.2 Field Documentation	137
3.42.2.1 name	137
3.42.2.2 description	137
3.42.2.3 type	137
3.42.2.4 dimension	137
3.43 flint::fmpz Class Reference	137
3.43.1 Detailed Description	137
3.43.2 Constructor & Destructor Documentation	138
3.43.2.1 fmpz()	138
3.43.2.2 ~fmpz()	138
3.43.3 Member Function Documentation	138
3.43.3.1 print()	138
3.43.4 Field Documentation	138
3.43.4.1 d	138
3.44 Fraction Class Reference	138
3.44.1 Detailed Description	139
3.44.2 Constructor & Destructor Documentation	139
3.44.2.1 Fraction() [1/2]	139
3.44.2.2 Fraction() [2/2]	139
3.44.3 Member Function Documentation	139
3.44.3.1 print()	139
3.44.3.2 setValue() [1/2]	139
3.44.3.3 setValue() [2/2]	140
3.44.3.4 add() [1/2]	140
3.44.3.5 add() [2/2]	140
3.44.3.6 sub()	140
3.44.3.7 gcd()	140
3.44.3.8 normal()	140
3.44.3.9 isEq()	140
3.44.4 Field Documentation	141
3.44.4.1 num	141
3.44.4.2 den	141
3.44.4.3 ratio	141

3.45 FUN_INFO Struct Reference	141
3.45.1 Detailed Description	141
3.45.2 Field Documentation	142
3.45.2.1 location	142
3.45.2.2 numargs	142
3.45.2.3 numfunnies	142
3.45.2.4 numwildcards	142
3.45.2.5 symmet	142
3.45.2.6 tensor	142
3.45.2.7 commute	142
3.46 FuNcTiOn Struct Reference	143
3.46.1 Detailed Description	143
3.46.2 Field Documentation	144
3.46.2.1 tabl	144
3.46.2.2 symminfo	144
3.46.2.3 name	144
3.46.2.4 commute	144
3.46.2.5 complex	144
3.46.2.6 number	145
3.46.2.7 flags	145
3.46.2.8 spec	145
3.46.2.9 symmetric	145
3.46.2.10 node	145
3.46.2.11 namesize	146
3.46.2.12 dimension	146
3.46.2.13 maxnumargs	146
3.46.2.14 minnumargs	146
3.47 gcd_heuristic_failed Class Reference	146
3.47.1 Detailed Description	146
3.48 HANDLERS Struct Reference	146
3.48.1 Detailed Description	147
3.48.2 Field Documentation	147
3.48.2.1 newlogonly	147
3.48.2.2 newhandle	147
3.48.2.3 oldhandle	147
3.48.2.4 oldlogonly	147
3.48.2.5 oldprinttype	147
3.48.2.6 oldsilent	148
3.49 IInput Struct Reference	148
3.49.1 Detailed Description	148
3.49.2 Field Documentation	148
3.49.2.1 name	148

3.49.2.2 icode	148
3.49.2.3 nplistn	148
3.49.2.4 plistn	149
3.49.2.5 plistc	149
3.49.2.6 cvallist	149
3.50 InDeX Struct Reference	149
3.50.1 Detailed Description	149
3.50.2 Field Documentation	149
3.50.2.1 name	149
3.50.2.2 type	150
3.50.2.3 dimension	150
3.50.2.4 number	150
3.50.2.5 flags	150
3.50.2.6 nmin4	150
3.50.2.7 node	150
3.50.2.8 namesize	150
3.51 indexblock Struct Reference	151
3.51.1 Detailed Description	151
3.51.2 Field Documentation	151
3.51.2.1 flags	151
3.51.2.2 previousblock	151
3.51.2.3 position	151
3.51.2.4 objects	152
3.52 InDeXeNtRy Struct Reference	152
3.52.1 Detailed Description	152
3.52.2 Field Documentation	153
3.52.2.1 position	153
3.52.2.2 length	153
3.52.2.3 variables	153
3.52.2.4 CompressSize	153
3.52.2.5 nsymbols	153
3.52.2.6 nindices	154
3.52.2.7 nvectors	154
3.52.2.8 nfunctions	154
3.52.2.9 size	154
3.52.2.10 name	154
3.53 iniinfo Struct Reference	155
3.53.1 Detailed Description	155
3.53.2 Field Documentation	155
3.53.2.1 entriesinindex	155
3.53.2.2 numberofindexblocks	155
3.53.2.3 firstindexblock	155

3.53.2.4 lastindexblock	155
3.53.2.5 numberoftables	156
3.53.2.6 numberofnamesblocks	156
3.53.2.7 firstnameblock	156
3.53.2.8 lastnameblock	156
3.54 INSIDEINFO Struct Reference	156
3.54.1 Detailed Description	157
3.54.2 Field Documentation	157
3.54.2.1 buffer	157
3.54.2.2 oldcompiletype	157
3.54.2.3 oldparallelflag	157
3.54.2.4 oldnumpotmoddollars	157
3.54.2.5 size	157
3.54.2.6 numdollars	157
3.54.2.7 oldcbuf	158
3.54.2.8 oldrbuf	158
3.54.2.9 inscbuf	158
3.54.2.10 oldcnumlhs	158
3.55 Interaction Class Reference	158
3.55.1 Detailed Description	159
3.55.2 Constructor & Destructor Documentation	159
3.55.2.1 Interaction()	159
3.55.2.2 ~Interaction()	159
3.55.3 Member Function Documentation	160
3.55.3.1 prInteraction()	160
3.55.4 Field Documentation	160
3.55.4.1 mdl	160
3.55.4.2 name	160
3.55.4.3 plist	160
3.55.4.4 clist	160
3.55.4.5 slist	160
3.55.4.6 id	160
3.55.4.7 csum	161
3.55.4.8 nlegs	161
3.55.4.9 loop	161
3.55.4.10 icode	161
3.55.4.11 nplist	161
3.55.4.12 nclist	161
3.55.4.13 nslist	161
3.56 KEYWORD Struct Reference	162
3.56.1 Detailed Description	162
3.56.2 Field Documentation	162

3.56.2.1 name	162
3.56.2.2 func	162
3.56.2.3 type	162
3.56.2.4 flags	162
3.57 KEYWORDV Struct Reference	163
3.57.1 Detailed Description	163
3.57.2 Field Documentation	163
3.57.2.1 name	163
3.57.2.2 var	163
3.57.2.3 type	163
3.57.2.4 flags	163
3.58 LIST Struct Reference	164
3.58.1 Detailed Description	164
3.58.2 Field Documentation	164
3.58.2.1 lijst	164
3.58.2.2 message	164
3.58.2.3 num	164
3.58.2.4 maxnum	165
3.58.2.5 size	165
3.58.2.6 numglobal	165
3.58.2.7 numtemp	165
3.58.2.8 numclear	165
3.59 longMultiStruct Struct Reference	166
3.59.1 Detailed Description	166
3.59.2 Field Documentation	166
3.59.2.1 buffer	166
3.59.2.2 bufpos	166
3.59.2.3 packpos	166
3.59.2.4 nPacks	167
3.59.2.5 lastLen	167
3.59.2.6 next	167
3.60 M_const Struct Reference	167
3.60.1 Detailed Description	171
3.60.2 Field Documentation	171
3.60.2.1 zeropos	171
3.60.2.2 S0	171
3.60.2.3 gcmmod	171
3.60.2.4 gpowmod	171
3.60.2.5 TempDir	171
3.60.2.6 TempSortDir	172
3.60.2.7 IncDir	172
3.60.2.8 InputFileName	172

3.60.2.9 LogFileName	172
3.60.2.10 OutBuffer	172
3.60.2.11 Path	172
3.60.2.12 SetupDir	172
3.60.2.13 SetupFile	172
3.60.2.14 gFortran90Kind	173
3.60.2.15 gextrasym	173
3.60.2.16 ggextrasym	173
3.60.2.17 oldnumextrasymbols	173
3.60.2.18 SpectatorFiles	173
3.60.2.19 MaxTer	173
3.60.2.20 CompressSize	173
3.60.2.21 ScratSize	173
3.60.2.22 HideSize	174
3.60.2.23 SizeStoreCache	174
3.60.2.24 MaxStreamSize	174
3.60.2.25 SIOsize	174
3.60.2.26 SLargeSize	174
3.60.2.27 SSmallEsize	174
3.60.2.28 SSmallSize	174
3.60.2.29 STermsInSmall	174
3.60.2.30 MaxBracketBufferSize	175
3.60.2.31 hProcessBucketSize	175
3.60.2.32 gProcessBucketSize	175
3.60.2.33 shmWinSize	175
3.60.2.34 OldChildTime	175
3.60.2.35 OldSecTime	175
3.60.2.36 OldMilliTime	175
3.60.2.37 WorkSize	175
3.60.2.38 gThreadBucketSize	176
3.60.2.39 ggThreadBucketSize	176
3.60.2.40 SumTime	176
3.60.2.41 SpectatorSize	176
3.60.2.42 TimeLimit	176
3.60.2.43 FileOnlyFlag	176
3.60.2.44 Interact	176
3.60.2.45 MaxParLevel	176
3.60.2.46 OutBufSize	177
3.60.2.47 SMaxFpatches	177
3.60.2.48 SMaxPatches	177
3.60.2.49 StdOut	177
3.60.2.50 ginsidefirst	177

3.60.2.51 gDefDim	177
3.60.2.52 gDefDim4	177
3.60.2.53 NumFixedSets	177
3.60.2.54 NumFixedFunctions	178
3.60.2.55 rbufnum	178
3.60.2.56 dbufnum	178
3.60.2.57 sbufnum	178
3.60.2.58 zbufnum	178
3.60.2.59 SkipClears	178
3.60.2.60 gTokensWriteFlag	178
3.60.2.61 gfunpowers	178
3.60.2.62 gStatsFlag	179
3.60.2.63 gNamesFlag	179
3.60.2.64 gCodesFlag	179
3.60.2.65 gSortType	179
3.60.2.66 gproperorderflag	179
3.60.2.67 hparallelflag	179
3.60.2.68 gparallelflag	179
3.60.2.69 totalnumberofthreads	179
3.60.2.70 gSizeCommuteInSet	180
3.60.2.71 gThreadStats	180
3.60.2.72 ggThreadStats	180
3.60.2.73 gFinalStats	180
3.60.2.74 ggFinalStats	180
3.60.2.75 gThreadsFlag	180
3.60.2.76 ggThreadsFlag	180
3.60.2.77 gThreadBalancing	180
3.60.2.78 ggThreadBalancing	181
3.60.2.79 gThreadSortFileSynch	181
3.60.2.80 ggThreadSortFileSynch	181
3.60.2.81 gProcessStats	181
3.60.2.82 ggProcessStats	181
3.60.2.83 gOldParallelStats	181
3.60.2.84 ggOldParallelStats	181
3.60.2.85 maxFlevels	181
3.60.2.86 resetTimeOnClear	182
3.60.2.87 gcNumDollars	182
3.60.2.88 MultiRun	182
3.60.2.89 gNoSpacesInNumbers	182
3.60.2.90 ggNoSpacesInNumbers	182
3.60.2.91 gIsFortran90	182
3.60.2.92 PrintTotalSize	182

3.60.2.93 fbufferSize	182
3.60.2.94 gOldFactArgFlag	183
3.60.2.95 ggOldFactArgFlag	183
3.60.2.96 gnumextrasym	183
3.60.2.97 ggnumextrasym	183
3.60.2.98 NumSpectatorFiles	183
3.60.2.99 SizeForSpectatorFiles	183
3.60.2.100 gOldGCDflag	183
3.60.2.101 ggOldGCDflag	183
3.60.2.102 gWTimeStatsFlag	184
3.60.2.103 ggWTimeStatsFlag	184
3.60.2.104 jumpratio	184
3.60.2.105 MaxTal	184
3.60.2.106 IndDum	184
3.60.2.107 DumInd	184
3.60.2.108 Willnd	184
3.60.2.109 gncmod	184
3.60.2.110 gnpowmod	185
3.60.2.111 gmodmode	185
3.60.2.112 gUnitTrace	185
3.60.2.113 gOutputMode	185
3.60.2.114 gOutputSpaces	185
3.60.2.115 gOutNumberType	185
3.60.2.116 gCnumpows	185
3.60.2.117 gUniTrace	185
3.60.2.118 MaxWildcards	186
3.60.2.119 mTraceDum	186
3.60.2.120 OffsetIndex	186
3.60.2.121 OffsetVector	186
3.60.2.122 RepMax	186
3.60.2.123 LogType	186
3.60.2.124 ggStatsFlag	186
3.60.2.125 gLineLength	186
3.60.2.126 qError	187
3.60.2.127 FortranCont	187
3.60.2.128 HoldFlag	187
3.60.2.129 Ordering	187
3.60.2.130 silent	187
3.60.2.131 tracebackflag	187
3.60.2.132 expnum	187
3.60.2.133 denomnum	187
3.60.2.134 facnum	188

3.60.2.135	invfacnum	188
3.60.2.136	sumnum	188
3.60.2.137	sumpnum	188
3.60.2.138	OldOrderFlag	188
3.60.2.139	termfunnum	188
3.60.2.140	matchfunnum	188
3.60.2.141	countfunnum	188
3.60.2.142	gPolyFun	189
3.60.2.143	gPolyFunInv	189
3.60.2.144	gPolyFunType	189
3.60.2.145	gPolyFunExp	189
3.60.2.146	gPolyFunVar	189
3.60.2.147	gPolyFunPow	189
3.60.2.148	dollarzero	189
3.60.2.149	atstartup	189
3.60.2.150	exitflag	190
3.60.2.151	NumStoreCaches	190
3.60.2.152	gIndentSpace	190
3.60.2.153	ggIndentSpace	190
3.60.2.154	gShortStatsMax	190
3.60.2.155	ggShortStatsMax	190
3.60.2.156	gextrasymbols	190
3.60.2.157	ggextrasymbols	191
3.60.2.158	zerorhs	191
3.60.2.159	onerhs	191
3.60.2.160	havesortdir	191
3.60.2.161	vectorzero	191
3.60.2.162	ClearStore	191
3.60.2.163	BracketFactors	191
3.60.2.164	FromStdin	191
3.60.2.165	IgnoreDeprecation	192
3.61	MCBlock Class Reference	192
3.61.1	Detailed Description	192
3.61.2	Constructor & Destructor Documentation	192
3.61.2.1	MCBlock()	192
3.61.2.2	~MCBlock()	192
3.61.3	Member Function Documentation	193
3.61.3.1	init()	193
3.61.4	Field Documentation	193
3.61.4.1	edges	193
3.61.4.2	nmedges	193
3.61.4.3	nartps	193

3.61.4.4 loop	193
3.61.4.5 DUMMYPADDING	193
3.62 MCBridge Class Reference	194
3.62.1 Detailed Description	194
3.62.2 Constructor & Destructor Documentation	194
3.62.2.1 MCBridge()	194
3.62.2.2 ~MCBridge()	194
3.62.3 Field Documentation	194
3.62.3.1 nodes	194
3.62.3.2 next	194
3.63 MCEdge Class Reference	195
3.63.1 Detailed Description	195
3.63.2 Constructor & Destructor Documentation	195
3.63.2.1 MCEdge()	195
3.63.2.2 ~MCEdge()	195
3.63.3 Field Documentation	195
3.63.3.1 nodes	195
3.63.3.2 momset	195
3.63.3.3 momdir	196
3.63.3.4 DUMMYPADDING	196
3.64 MConn Class Reference	196
3.64.1 Detailed Description	197
3.64.2 Constructor & Destructor Documentation	197
3.64.2.1 MConn()	197
3.64.2.2 ~MConn()	197
3.64.3 Member Function Documentation	198
3.64.3.1 init()	198
3.64.3.2 initCEdges()	198
3.64.3.3 pushNode()	198
3.64.3.4 pushEdge()	198
3.64.3.5 addCEdge()	198
3.64.3.6 addOPlc()	198
3.64.3.7 addBridge()	199
3.64.3.8 addArtic()	199
3.64.3.9 addBlock()	199
3.64.3.10 addBlockSelf()	199
3.64.3.11 print()	199
3.64.3.12 prEdges()	199
3.64.4 Field Documentation	200
3.64.4.1 cedges	200
3.64.4.2 opics	200
3.64.4.3 bridges	200

3.64.4.4 blocks	200
3.64.4.5 articuls	200
3.64.4.6 opisp	200
3.64.4.7 opistk	200
3.64.4.8 blksp	201
3.64.4.9 blkstk	201
3.64.4.10 snodes	201
3.64.4.11 sedges	201
3.64.4.12 nopic	201
3.64.4.13 nlpopic	201
3.64.4.14 nctopic	201
3.64.4.15 nbacked	201
3.64.4.16 nbridges	202
3.64.4.17 ne0bridges	202
3.64.4.18 ne1bridges	202
3.64.4.19 nselfloops	202
3.64.4.20 nmultiedges	202
3.64.4.21 nblocks	202
3.64.4.22 na1blocks	202
3.64.4.23 narticuls	202
3.64.4.24 neblocks	203
3.64.4.25 nopisp	203
3.64.4.26 opistkptr	203
3.64.4.27 nblksp	203
3.64.4.28 blkstkptr	203
3.64.4.29 DUMMYPADDING	203
3.65 MCOpI Class Reference	203
3.65.1 Detailed Description	204
3.65.2 Constructor & Destructor Documentation	204
3.65.2.1 MCOpI()	204
3.65.2.2 ~MCOpI()	204
3.65.3 Member Function Documentation	204
3.65.3.1 init()	204
3.65.4 Field Documentation	204
3.65.4.1 nodes	204
3.65.4.2 nnodes	205
3.65.4.3 nlegs	205
3.65.4.4 next	205
3.65.4.5 nedges	205
3.65.4.6 loop	205
3.65.4.7 ctloop	205
3.65.4.8 mom0lg	205

3.65.4.9 DUMMYPADDING	206
3.66 MGraph Class Reference	206
3.66.1 Detailed Description	207
3.66.2 Constructor & Destructor Documentation	208
3.66.2.1 MGraph() [1/2]	208
3.66.2.2 MGraph() [2/2]	208
3.66.2.3 ~MGraph()	208
3.66.3 Member Function Documentation	208
3.66.3.1 init()	208
3.66.3.2 generate()	208
3.66.3.3 isExternal()	209
3.66.3.4 printAdjMat()	209
3.66.3.5 print()	209
3.66.3.6 printPy()	209
3.66.3.7 isConnected()	209
3.66.3.8 visit()	209
3.66.3.9 isIsomorphic()	209
3.66.3.10 permMat()	210
3.66.3.11 compMat()	210
3.66.3.12 refineClass()	210
3.66.3.13 bisearchME()	210
3.66.3.14 biconnME()	210
3.66.3.15 isOptM()	211
3.66.3.16 connectClass()	211
3.66.3.17 connectNode()	211
3.66.3.18 connectLeg()	211
3.66.3.19 newGraph()	211
3.66.4 Field Documentation	211
3.66.4.1 opt	211
3.66.4.2 group	212
3.66.4.3 orbits	212
3.66.4.4 nodes	212
3.66.4.5 mld	212
3.66.4.6 clist	212
3.66.4.7 pld	212
3.66.4.8 nNodes	212
3.66.4.9 nEdges	212
3.66.4.10 nLoops	213
3.66.4.11 nExtern	213
3.66.4.12 nClasses	213
3.66.4.13 mindeg	213
3.66.4.14 maxdeg	213

3.66.4.15 adjMat	213
3.66.4.16 curcl	213
3.66.4.17 egraph	213
3.66.4.18 nsym	214
3.66.4.19 esym	214
3.66.4.20 cDiag	214
3.66.4.21 c1PI	214
3.66.4.22 cNoTadpole	214
3.66.4.23 cNoTadBlock	214
3.66.4.24 c1PINoTadBlock	214
3.66.4.25 wscon	214
3.66.4.26 wsopi	215
3.66.4.27 ngen	215
3.66.4.28 ngconn	215
3.66.4.29 nCallRefine	215
3.66.4.30 discardRefine	215
3.66.4.31 discardDisc	215
3.66.4.32 discardIso	215
3.66.4.33 opi	215
3.66.4.34 opiloop	216
3.66.4.35 extself	216
3.66.4.36 selfloop	216
3.66.4.37 multiedge	216
3.66.4.38 tadpole	216
3.66.4.39 tadblock	216
3.66.4.40 block	216
3.66.4.41 bipart	216
3.66.4.42 DUMMYPADDING1	217
3.66.4.43 mconn	217
3.66.4.44 modmat	217
3.66.4.45 bidef	217
3.66.4.46 bilow	217
3.66.4.47 bicol	217
3.66.4.48 bicount	217
3.66.4.49 DUMMYPADDING2	218
3.67 MiNmAx Struct Reference	218
3.67.1 Detailed Description	218
3.67.2 Field Documentation	218
3.67.2.1 mini	218
3.67.2.2 maxi	218
3.67.2.3 size	219
3.68 MInput Struct Reference	219

3.68.1 Detailed Description	219
3.68.2 Field Documentation	219
3.68.2.1 name	219
3.68.2.2 defpart	219
3.68.2.3 ncouple	219
3.68.2.4 cnamlist	220
3.69 MNode Class Reference	220
3.69.1 Detailed Description	220
3.69.2 Constructor & Destructor Documentation	220
3.69.2.1 MNode() [1/2]	220
3.69.2.2 MNode() [2/2]	221
3.69.3 Field Documentation	221
3.69.3.1 id	221
3.69.3.2 deg	221
3.69.3.3 clss	221
3.69.3.4 extloop	221
3.69.3.5 cmindeg	221
3.69.3.6 cmaxdeg	222
3.69.3.7 freelg	222
3.69.3.8 visited	222
3.70 MNodeClass Class Reference	222
3.70.1 Detailed Description	223
3.70.2 Constructor & Destructor Documentation	223
3.70.2.1 MNodeClass()	223
3.70.2.2 ~MNodeClass()	223
3.70.3 Member Function Documentation	223
3.70.3.1 init()	223
3.70.3.2 copy()	223
3.70.3.3 clCmp()	223
3.70.3.4 printMat()	224
3.70.3.5 mkFlist()	224
3.70.3.6 mkNdCI()	224
3.70.3.7 mkCI Mat()	224
3.70.3.8 incMat()	224
3.70.3.9 cmpMNCArry()	224
3.70.3.10 reorder()	225
3.70.4 Field Documentation	225
3.70.4.1 clmat	225
3.70.4.2 clist	225
3.70.4.3 ndcl	225
3.70.4.4 flist	225
3.70.4.5 clord	225

3.70.4.6 cmindeg	225
3.70.4.7 cmaxdeg	226
3.70.4.8 nNodes	226
3.70.4.9 nClasses	226
3.70.4.10 maxdeg	226
3.70.4.11 flg0	226
3.70.4.12 flg1	226
3.70.4.13 flg2	226
3.71 Model Class Reference	227
3.71.1 Detailed Description	228
3.71.2 Constructor & Destructor Documentation	228
3.71.2.1 Model()	228
3.71.2.2 ~Model()	228
3.71.3 Member Function Documentation	229
3.71.3.1 prModel()	229
3.71.3.2 addParticle()	229
3.71.3.3 addParticleEnd()	229
3.71.3.4 addInteraction()	229
3.71.3.5 addInteractionEnd()	229
3.71.3.6 findParticleName()	229
3.71.3.7 findParticleCode()	230
3.71.3.8 findInteractionName()	230
3.71.3.9 findInteractionCode()	230
3.71.3.10 particleName()	230
3.71.3.11 particleCode()	230
3.71.3.12 normalParticle()	230
3.71.3.13 antiParticle()	230
3.71.3.14 allParticles()	231
3.71.3.15 findMClass()	231
3.71.3.16 prParticleArray()	231
3.71.3.17 printMInput()	231
3.71.3.18 printPInput()	231
3.71.3.19 printIInput()	231
3.71.4 Field Documentation	232
3.71.4.1 name	232
3.71.4.2 cnlist	232
3.71.4.3 ncouple	232
3.71.4.4 nParticles	232
3.71.4.5 particles	232
3.71.4.6 pdef	232
3.71.4.7 nallPart	232
3.71.4.8 allPart	233

3.71.4.9 nintPart	233
3.71.4.10 intPart	233
3.71.4.11 nInteracts	233
3.71.4.12 interacts	233
3.71.4.13 vdef	233
3.71.4.14 maxnlegs	233
3.71.4.15 maxcpl	233
3.71.4.16 maxloop	234
3.71.4.17 cplgcp	234
3.71.4.18 cplglg	234
3.71.4.19 cplgnvl	234
3.71.4.20 cplgvl	234
3.71.4.21 ncplgcp	234
3.71.4.22 defpart	234
3.72 MoDeL Struct Reference	235
3.72.1 Detailed Description	235
3.72.2 Field Documentation	235
3.72.2.1 vertices	235
3.72.2.2 couplings	236
3.72.2.3 name	236
3.72.2.4 grccmodel	236
3.72.2.5 legcouple	236
3.72.2.6 nparticles	236
3.72.2.7 nvertices	236
3.72.2.8 invertices	236
3.72.2.9 sizevertices	236
3.72.2.10 sizecouplings	237
3.72.2.11 ncouplings	237
3.72.2.12 error	237
3.72.2.13 dummy	237
3.73 MODNUM Struct Reference	237
3.73.1 Detailed Description	237
3.73.2 Field Documentation	237
3.73.2.1 a	237
3.73.2.2 m	238
3.73.2.3 na	238
3.73.2.4 nm	238
3.74 MoDoPtDoLIaRS Struct Reference	238
3.74.1 Detailed Description	238
3.74.2 Field Documentation	238
3.74.2.1 number	238
3.74.2.2 type	239

3.75 monomial_larger Class Reference	239
3.75.1 Detailed Description	239
3.75.2 Constructor & Destructor Documentation	239
3.75.2.1 monomial_larger()	239
3.75.3 Member Function Documentation	239
3.75.3.1 operator>()	239
3.76 MOrbits Class Reference	240
3.76.1 Detailed Description	240
3.76.2 Constructor & Destructor Documentation	240
3.76.2.1 MOrbits()	240
3.76.2.2 ~MOrbits()	240
3.76.3 Member Function Documentation	240
3.76.3.1 print()	240
3.76.3.2 initPerm()	241
3.76.3.3 fromPerm()	241
3.76.3.4 toOrbits()	241
3.76.4 Field Documentation	241
3.76.4.1 nOrbits	241
3.76.4.2 nNodes	241
3.76.4.3 nd2or	241
3.76.4.4 or2nd	241
3.76.4.5 flist	242
3.77 flint::mpoly Class Reference	242
3.77.1 Detailed Description	242
3.77.2 Constructor & Destructor Documentation	242
3.77.2.1 mpoly()	242
3.77.2.2 ~mpoly()	242
3.77.3 Member Function Documentation	243
3.77.3.1 print()	243
3.77.4 Field Documentation	243
3.77.4.1 d	243
3.78 flint::mpoly_ctx Class Reference	243
3.78.1 Detailed Description	243
3.78.2 Constructor & Destructor Documentation	243
3.78.2.1 mpoly_ctx()	243
3.78.2.2 ~mpoly_ctx()	244
3.78.3 Field Documentation	244
3.78.3.1 d	244
3.79 flint::mpoly_factor Class Reference	244
3.79.1 Detailed Description	244
3.79.2 Constructor & Destructor Documentation	244
3.79.2.1 mpoly_factor()	244

3.79.2.2 ~mpoly_factor()	244
3.79.3 Field Documentation	245
3.79.3.1 d	245
3.80 N_const Struct Reference	245
3.80.1 Detailed Description	248
3.80.2 Field Documentation	248
3.80.2.1 OldPosIn	248
3.80.2.2 OldPosOut	248
3.80.2.3 theposition	248
3.80.2.4 EndNest	248
3.80.2.5 Frozen	248
3.80.2.6 FullProto	248
3.80.2.7 cTerm	249
3.80.2.8 RepPoint	249
3.80.2.9 WildValue	249
3.80.2.10 WildStop	249
3.80.2.11 argaddress	249
3.80.2.12 RepFunList	249
3.80.2.13 patstop	249
3.80.2.14 terstop	249
3.80.2.15 terstart	250
3.80.2.16 terfirstcomm	250
3.80.2.17 DumFound	250
3.80.2.18 DumPlace	250
3.80.2.19 DumFunPlace	250
3.80.2.20 UsedSymbol	250
3.80.2.21 UsedVector	250
3.80.2.22 UsedIndex	250
3.80.2.23 UsedFunction	251
3.80.2.24 MaskPointer	251
3.80.2.25 ForFindOnly	251
3.80.2.26 findTerm	251
3.80.2.27 findPattern	251
3.80.2.28 dummyrenumlist	251
3.80.2.29 funargs	251
3.80.2.30 funlocs	251
3.80.2.31 funinds	252
3.80.2.32 NoScrat2	252
3.80.2.33 ReplaceScrat	252
3.80.2.34 tracestack	252
3.80.2.35 selecttermundo	252
3.80.2.36 patternbuffer	252

3.80.2.37	termbuffer	252
3.80.2.38	PoinScratch	252
3.80.2.39	FunScratch	253
3.80.2.40	RenumScratch	253
3.80.2.41	FunInfo	253
3.80.2.42	SplitScratch	253
3.80.2.43	SplitScratch1	253
3.80.2.44	FunSorts	253
3.80.2.45	SoScratC	253
3.80.2.46	listinprint	253
3.80.2.47	currentTerm	254
3.80.2.48	arglist	254
3.80.2.49	tlisbuf	254
3.80.2.50	compressSpace	254
3.80.2.51	SHcombi	254
3.80.2.52	poly_vars	254
3.80.2.53	cmod	254
3.80.2.54	SHvar	254
3.80.2.55	deferskipped	255
3.80.2.56	InScratch	255
3.80.2.57	SplitScratchSize	255
3.80.2.58	InScratch1	255
3.80.2.59	SplitScratchSize1	255
3.80.2.60	ninterms	255
3.80.2.61	SHcombisize	255
3.80.2.62	NumTotWildArgs	255
3.80.2.63	UseFindOnly	256
3.80.2.64	UsedOtherFind	256
3.80.2.65	ErrorInDollar	256
3.80.2.66	numfargs	256
3.80.2.67	numflocs	256
3.80.2.68	nargs	256
3.80.2.69	tohunt	256
3.80.2.70	numoffuns	256
3.80.2.71	funisize	257
3.80.2.72	RSize	257
3.80.2.73	numtracesctack	257
3.80.2.74	intracestack	257
3.80.2.75	numfuninfo	257
3.80.2.76	NumFunSorts	257
3.80.2.77	MaxFunSorts	257
3.80.2.78	arglistsize	257

3.80.2.79 tlistsize	258
3.80.2.80 filenum	258
3.80.2.81 compressSize	258
3.80.2.82 polysortflag	258
3.80.2.83 nogroundlevel	258
3.80.2.84 subsubveto	258
3.80.2.85 MaxRenumScratch	258
3.80.2.86 oldtype	258
3.80.2.87 oldvalue	259
3.80.2.88 NumWild	259
3.80.2.89 RepFunNum	259
3.80.2.90 DisOrderFlag	259
3.80.2.91 WildDirt	259
3.80.2.92 NumFound	259
3.80.2.93 WildReserve	259
3.80.2.94 TelnFun	259
3.80.2.95 TeSuOut	260
3.80.2.96 WildArgs	260
3.80.2.97 WildEat	260
3.80.2.98 PolyNormFlag	260
3.80.2.99 PolyFunTodo	260
3.80.2.100 sizeselecttermundo	260
3.80.2.101 patternbuffersize	260
3.80.2.102 numlistinprint	260
3.80.2.103 ncmod	261
3.80.2.104 ExpectedSign	261
3.80.2.105 SignCheck	261
3.80.2.106 IndDum	261
3.80.2.107 poly_num_vars	261
3.80.2.108 idfunctionflag	261
3.80.2.109 poly_vars_type	261
3.80.2.110 tryterm	262
3.81 nameblock Struct Reference	262
3.81.1 Detailed Description	262
3.81.2 Field Documentation	262
3.81.2.1 previousblock	262
3.81.2.2 position	262
3.81.2.3 names	262
3.82 NaMeNode Struct Reference	263
3.82.1 Detailed Description	263
3.82.2 Field Documentation	263
3.82.2.1 name	263

3.82.2.2 parent	263
3.82.2.3 left	263
3.82.2.4 right	264
3.82.2.5 balance	264
3.82.2.6 type	264
3.82.2.7 number	264
3.83 NaMeSpAcE Struct Reference	264
3.83.1 Detailed Description	265
3.83.2 Field Documentation	265
3.83.2.1 previous	265
3.83.2.2 next	265
3.83.2.3 usernames	265
3.83.2.4 name	265
3.84 NaMeTree Struct Reference	266
3.84.1 Detailed Description	266
3.84.2 Field Documentation	266
3.84.2.1 namenode	266
3.84.2.2 namebuffer	267
3.84.2.3 nodesize	267
3.84.2.4 nodefill	267
3.84.2.5 namesize	267
3.84.2.6 namefill	267
3.84.2.7 oldnamefill	267
3.84.2.8 oldnodefill	268
3.84.2.9 globalnamefill	268
3.84.2.10 globalnodefill	268
3.84.2.11 clearnamefill	268
3.84.2.12 clearnodefill	268
3.84.2.13 headnode	268
3.85 NCand Class Reference	269
3.85.1 Detailed Description	269
3.85.2 Constructor & Destructor Documentation	269
3.85.2.1 NCand()	269
3.85.2.2 ~NCand()	269
3.85.3 Member Function Documentation	269
3.85.3.1 prNCand()	269
3.85.4 Field Documentation	270
3.85.4.1 deg	270
3.85.4.2 st	270
3.85.4.3 nilist	270
3.85.4.4 ilist	270
3.86 NCInput Struct Reference	270

3.86.1 Detailed Description	270
3.86.2 Field Documentation	271
3.86.2.1 cldeg	271
3.86.2.2 clnum	271
3.86.2.3 cltyp	271
3.86.2.4 cmind	271
3.86.2.5 cmaxd	271
3.86.2.6 ptcl	271
3.86.2.7 cple	271
3.87 NeStInG Struct Reference	272
3.87.1 Detailed Description	272
3.87.2 Field Documentation	272
3.87.2.1 termsize	272
3.87.2.2 funsize	272
3.87.2.3 argsize	272
3.88 node Struct Reference	273
3.88.1 Detailed Description	273
3.88.2 Constructor & Destructor Documentation	273
3.88.2.1 node() [1/2]	273
3.88.2.2 node() [2/2]	273
3.88.3 Member Function Documentation	274
3.88.3.1 cmp()	274
3.88.3.2 operator()()	274
3.88.3.3 calcHash()	274
3.88.4 Field Documentation	274
3.88.4.1 data	274
3.88.4.2 l	274
3.88.4.3 r	274
3.88.4.4 sign	275
3.88.4.5 hash	275
3.89 NoDe Struct Reference	275
3.89.1 Detailed Description	275
3.89.2 Field Documentation	276
3.89.2.1 left	276
3.89.2.2 rght	276
3.89.2.3 lloser	276
3.89.2.4 rloser	276
3.89.2.5 lsrc	276
3.89.2.6 rsrc	276
3.90 NodeEq Struct Reference	276
3.90.1 Detailed Description	277
3.90.2 Member Function Documentation	277

3.90.2.1 operator()	277
3.91 NodeHash Struct Reference	277
3.91.1 Detailed Description	277
3.91.2 Member Function Documentation	277
3.91.2.1 operator()	277
3.92 NStack Class Reference	277
3.92.1 Detailed Description	278
3.92.2 Constructor & Destructor Documentation	278
3.92.2.1 NStack()	278
3.92.2.2 ~NStack()	278
3.92.3 Member Function Documentation	278
3.92.3.1 print()	278
3.92.4 Field Documentation	278
3.92.4.1 noden	278
3.92.4.2 deg	279
3.92.4.3 st	279
3.92.4.4 nilist	279
3.92.4.5 ilist	279
3.93 O_const Struct Reference	279
3.93.1 Detailed Description	281
3.93.2 Field Documentation	281
3.93.2.1 SaveData	281
3.93.2.2 SaveHeader	281
3.93.2.3 OptimizeResult	281
3.93.2.4 OutputLine	281
3.93.2.5 OutStop	282
3.93.2.6 OutFill	282
3.93.2.7 bracket	282
3.93.2.8 termbuf	282
3.93.2.9 tabstring	282
3.93.2.10 wpos	282
3.93.2.11 wpoin	282
3.93.2.12 DollarOutBuffer	282
3.93.2.13 CurBufWrt	283
3.93.2.14 FlipWORD	283
3.93.2.15 FlipLONG	283
3.93.2.16 FlipPOS	283
3.93.2.17 FlipPOINTER	283
3.93.2.18 ResizeData	283
3.93.2.19 ResizeWORD	283
3.93.2.20 ResizeNCWORD	283
3.93.2.21 ResizeLONG	284

3.93.2.22 ResizePOS	284
3.93.2.23 ResizePOINTER	284
3.93.2.24 CheckPower	284
3.93.2.25 RenumberVec	284
3.93.2.26 Dictionaries	284
3.93.2.27 tensorList	284
3.93.2.28 inscheme	284
3.93.2.29 NumInBrack	285
3.93.2.30 wlen	285
3.93.2.31 DollarOutSizeBuffer	285
3.93.2.32 DollarInOutBuffer	285
3.93.2.33 Optimize	285
3.93.2.34 OutInBuffer	285
3.93.2.35 NoSpacesInNumbers	285
3.93.2.36 BlockSpaces	285
3.93.2.37 CurrentDictionary	286
3.93.2.38 SizeDictionaries	286
3.93.2.39 NumDictionaries	286
3.93.2.40 CurDictNumbers	286
3.93.2.41 CurDictVariables	286
3.93.2.42 CurDictSpecials	286
3.93.2.43 CurDictFunWithArgs	286
3.93.2.44 CurDictNumberWarning	286
3.93.2.45 CurDictNotInFunctions	287
3.93.2.46 CurDictInDollars	287
3.93.2.47 gNumDictionaries	287
3.93.2.48 IndentSpace	287
3.93.2.49 schemenum	287
3.93.2.50 transFlag	287
3.93.2.51 powerFlag	287
3.93.2.52 mpower	287
3.93.2.53 resizeFlag	288
3.93.2.54 bufferedInd	288
3.93.2.55 OutSkip	288
3.93.2.56 IsBracket	288
3.93.2.57 InFbrack	288
3.93.2.58 PrintType	288
3.93.2.59 FortFirst	288
3.93.2.60 DoubleFlag	288
3.93.2.61 FactorMode	289
3.93.2.62 FactorNum	289
3.93.2.63 ErrorBlock	289

3.93.2.64 OptimizationLevel	289
3.93.2.65 FortDotChar	289
3.94 objects Struct Reference	289
3.94.1 Detailed Description	290
3.94.2 Field Documentation	290
3.94.2.1 position	290
3.94.2.2 size	290
3.94.2.3 date	290
3.94.2.4 tablenumber	290
3.94.2.5 uncompressed	290
3.94.2.6 spare1	290
3.94.2.7 spare2	291
3.94.2.8 spare3	291
3.94.2.9 element	291
3.95 OptDef Struct Reference	291
3.95.1 Detailed Description	291
3.95.2 Field Documentation	291
3.95.2.1 name	291
3.95.2.2 mean	292
3.95.2.3 defaultv	292
3.95.2.4 DUMMYPPADDING	292
3.96 optimization Class Reference	292
3.96.1 Detailed Description	293
3.96.2 Description	293
3.96.3 Member Function Documentation	293
3.96.3.1 operator<()	293
3.96.4 Field Documentation	293
3.96.4.1 type	293
3.96.4.2 arg1	294
3.96.4.3 arg2	294
3.96.4.4 improve	294
3.96.4.5 coeff	294
3.96.4.6 eqnidxs	294
3.97 OPTIMIZE Struct Reference	295
3.97.1 Detailed Description	295
3.97.2 Field Documentation	295
3.97.2.1 fval	295
3.97.2.2 ival	295
3.97.2.3 horner	296
3.97.2.4 hornerdirection	296
3.97.2.5 method	296
3.97.2.6 mctstimelimit	296

3.97.2.7 mctsnumexpand	296
3.97.2.8 mctsnumkeep	296
3.97.2.9 mctsnumrepeat	296
3.97.2.10 greedytimelimit	296
3.97.2.11 greedyminnum	297
3.97.2.12 greedymaxperc	297
3.97.2.13 printstats	297
3.97.2.14 debugflags	297
3.97.2.15 schemeflags	297
3.97.2.16 mctsdecaymode	297
3.97.2.17 salter	297
3.97.2.18 spare	298
3.98 OPTIMIZERESULT Struct Reference	298
3.98.1 Detailed Description	298
3.98.2 Field Documentation	298
3.98.2.1 code	298
3.98.2.2 nameofexpr	298
3.98.2.3 codesize	298
3.98.2.4 exprnr	299
3.98.2.5 minvar	299
3.98.2.6 maxvar	299
3.99 Options Class Reference	299
3.99.1 Detailed Description	300
3.99.2 Constructor & Destructor Documentation	301
3.99.2.1 Options()	301
3.99.2.2 ~Options()	301
3.99.3 Member Function Documentation	301
3.99.3.1 setDefaultValues()	301
3.99.3.2 setOldDefaultValues()	301
3.99.3.3 setValue()	301
3.99.3.4 getValue()	301
3.99.3.5 setQGrafOpt()	302
3.99.3.6 print()	302
3.99.3.7 setOutputF()	302
3.99.3.8 setOutputP()	302
3.99.3.9 printLevel()	302
3.99.3.10 printModel()	302
3.99.3.11 setOutMG()	303
3.99.3.12 setOutAG()	303
3.99.3.13 setEndMG()	303
3.99.3.14 setErExit()	303
3.99.3.15 getDef()	303

3.99.3.16 getOldDef()	303
3.99.3.17 getQGDef()	304
3.99.3.18 begin()	304
3.99.3.19 end()	304
3.99.3.20 beginProc()	304
3.99.3.21 endProc()	304
3.99.3.22 beginSubProc()	304
3.99.3.23 endSubProc()	304
3.99.3.24 newMGraph()	305
3.99.3.25 newAGraph()	305
3.99.3.26 outModel()	305
3.99.4 Field Documentation	305
3.99.4.1 model	305
3.99.4.2 proc	305
3.99.4.3 sproc	305
3.99.4.4 out	305
3.99.4.5 outmg	306
3.99.4.6 endmg	306
3.99.4.7 outag	306
3.99.4.8 argmg	306
3.99.4.9 argemg	306
3.99.4.10 argag	306
3.99.4.11 qqref	306
3.99.4.12 values	306
3.99.4.13 qqopt	307
3.99.4.14 nqqopt	307
3.99.4.15 DUMMYPADDING	307
3.99.4.16 time0	307
3.99.4.17 time1	307
3.100 OptQGDef Struct Reference	307
3.100.1 Detailed Description	307
3.100.2 Field Documentation	308
3.100.2.1 name	308
3.100.2.2 cname	308
3.100.2.3 mean	308
3.101 OptQGRef Struct Reference	308
3.101.1 Detailed Description	308
3.101.2 Field Documentation	308
3.101.2.1 name	308
3.101.2.2 index	309
3.101.2.3 sign	309
3.102 Output Class Reference	309

3.102.1 Detailed Description	310
3.102.2 Constructor & Destructor Documentation	310
3.102.2.1 Output()	310
3.102.2.2 ~Output()	310
3.102.3 Member Function Documentation	310
3.102.3.1 setOutgrf()	310
3.102.3.2 setOutgrp()	310
3.102.3.3 outBeginF()	311
3.102.3.4 outBeginP()	311
3.102.3.5 outEndF()	311
3.102.3.6 outEndP()	311
3.102.3.7 outProcBeginF()	311
3.102.3.8 outProcBeginP()	311
3.102.3.9 outProcBegin0()	312
3.102.3.10 outSProcBeginF()	312
3.102.3.11 outSProcBeginP()	312
3.102.3.12 outProcEndF()	312
3.102.3.13 outProcEndP()	312
3.102.3.14 outEGraphF()	312
3.102.3.15 outEGraphP()	312
3.102.3.16 outModelF()	313
3.102.3.17 outModelP()	313
3.102.4 Field Documentation	313
3.102.4.1 opt	313
3.102.4.2 model	313
3.102.4.3 proc	313
3.102.4.4 sproc	313
3.102.4.5 outgrf	313
3.102.4.6 outgrfp	314
3.102.4.7 outgrp	314
3.102.4.8 outgrpp	314
3.102.4.9 proclId	314
3.102.4.10 outproc	314
3.103 P_const Struct Reference	315
3.103.1 Detailed Description	316
3.103.2 Field Documentation	316
3.103.2.1 DollarList	316
3.103.2.2 PreVarList	316
3.103.2.3 LoopList	317
3.103.2.4 ProcList	317
3.103.2.5 inside	317
3.103.2.6 firstnamespace	317

3.103.2.7 lastnamenamespace	317
3.103.2.8 fullname	317
3.103.2.9 PreSwitchStrings	317
3.103.2.10 preStart	317
3.103.2.11 preStop	318
3.103.2.12 preFill	318
3.103.2.13 procedureExtension	318
3.103.2.14 cprocedureExtension	318
3.103.2.15 PreAssignStack	318
3.103.2.16 PriefStack	318
3.103.2.17 PreSwitchModes	318
3.103.2.18 PreTypes	318
3.103.2.19 StopWatchZero	319
3.103.2.20 InOutBuf	319
3.103.2.21 pSize	319
3.103.2.22 PreAssignFlag	319
3.103.2.23 PreContinuation	319
3.103.2.24 PreproFlag	319
3.103.2.25 iBufError	319
3.103.2.26 PreOut	319
3.103.2.27 PreSwitchLevel	320
3.103.2.28 NumPreSwitchStrings	320
3.103.2.29 MaxPreTypes	320
3.103.2.30 NumPreTypes	320
3.103.2.31 MaxPriefLevel	320
3.103.2.32 PriefLevel	320
3.103.2.33 PreInsideLevel	320
3.103.2.34 DelayPrevar	320
3.103.2.35 AllowDelay	321
3.103.2.36 lhdollarerror	321
3.103.2.37 eat	321
3.103.2.38 gNumPre	321
3.103.2.39 PreDebug	321
3.103.2.40 OpenDictionary	321
3.103.2.41 PreAssignLevel	321
3.103.2.42 MaxPreAssignLevel	321
3.103.2.43 fullnamesize	322
3.103.2.44 DebugFlag	322
3.103.2.45 preError	322
3.103.2.46 ComChar	322
3.103.2.47 cComChar	322
3.104 ParallelVars Struct Reference	323

3.104.1 Detailed Description	323
3.104.2 Field Documentation	323
3.104.2.1 slavebuf	323
3.104.2.2 sbuf	324
3.104.2.3 rbufs	324
3.104.2.4 me	324
3.104.2.5 numtasks	324
3.104.2.6 parallel	324
3.104.2.7 rhsInParallel	324
3.104.2.8 mkSlaveInfile	324
3.104.2.9 exprbufsize	324
3.104.2.10 exptodo	325
3.104.2.11 log	325
3.104.2.12 numsbufs	325
3.104.2.13 numrbufs	325
3.105 PaRtl Struct Reference	325
3.105.1 Detailed Description	325
3.105.2 Field Documentation	326
3.105.2.1 psize	326
3.105.2.2 args	326
3.105.2.3 nargs	326
3.105.2.4 nfun	326
3.105.2.5 numargs	326
3.105.2.6 numpart	326
3.105.2.7 where	326
3.106 Particle Class Reference	327
3.106.1 Detailed Description	328
3.106.2 Constructor & Destructor Documentation	328
3.106.2.1 Particle()	328
3.106.2.2 ~Particle()	328
3.106.3 Member Function Documentation	328
3.106.3.1 particleName()	328
3.106.3.2 particleCode()	328
3.106.3.3 aparticle()	328
3.106.3.4 prParticle()	329
3.106.3.5 isNeutral()	329
3.106.3.6 typeName()	329
3.106.3.7 typeGName()	329
3.106.4 Field Documentation	329
3.106.4.1 mdl	329
3.106.4.2 name	329
3.106.4.3 aname	329

3.106.4.4 id	330
3.106.4.5 ptype	330
3.106.4.6 neutral	330
3.106.4.7 pcode	330
3.106.4.8 acode	330
3.106.4.9 cmindeg	330
3.106.4.10 cmaxdeg	330
3.106.4.11 extonly	331
3.107 PaRtlcLe Struct Reference	331
3.107.1 Detailed Description	331
3.107.2 Field Documentation	331
3.107.2.1 number	331
3.107.2.2 spin	331
3.107.2.3 mass	331
3.107.2.4 type	332
3.108 PeRmUtE Struct Reference	332
3.108.1 Detailed Description	332
3.108.2 Field Documentation	332
3.108.2.1 objects	332
3.108.2.2 sign	332
3.108.2.3 n	332
3.108.2.4 cycle	333
3.109 PeRmUtEp Struct Reference	333
3.109.1 Detailed Description	333
3.109.2 Field Documentation	333
3.109.2.1 objects	333
3.109.2.2 sign	333
3.109.2.3 n	333
3.109.2.4 cycle	334
3.110 PF_BUFFER Struct Reference	334
3.110.1 Detailed Description	334
3.110.2 Field Documentation	334
3.110.2.1 buff	334
3.110.2.2 fill	335
3.110.2.3 full	335
3.110.2.4 stop	335
3.110.2.5 status	335
3.110.2.6 retstat	335
3.110.2.7 request	335
3.110.2.8 type	335
3.110.2.9 index	335
3.110.2.10 tag	336

3.110.2.11 from	336
3.110.2.12 numbufs	336
3.110.2.13 active	336
3.111 PGIInput Struct Reference	336
3.111.1 Detailed Description	336
3.111.2 Field Documentation	337
3.111.2.1 cdeg	337
3.111.2.2 ctyp	337
3.111.2.3 cnum	337
3.111.2.4 cple	337
3.111.2.5 pname	337
3.111.2.6 pcode	337
3.112 PInput Struct Reference	338
3.112.1 Detailed Description	338
3.112.2 Field Documentation	338
3.112.2.1 name	338
3.112.2.2 aname	338
3.112.2.3 pcode	338
3.112.2.4 acode	338
3.112.2.5 ptypen	338
3.112.2.6 ptypec	339
3.112.2.7 extonly	339
3.113 PNodeClass Class Reference	339
3.113.1 Detailed Description	340
3.113.2 Constructor & Destructor Documentation	340
3.113.2.1 PNodeClass() [1/2]	340
3.113.2.2 PNodeClass() [2/2]	340
3.113.2.3 ~PNodeClass()	340
3.113.3 Member Function Documentation	340
3.113.3.1 prPNodeClass()	340
3.113.3.2 prElem()	341
3.113.4 Field Documentation	341
3.113.4.1 sproc	341
3.113.4.2 deg	341
3.113.4.3 type	341
3.113.4.4 particle	341
3.113.4.5 couple	341
3.113.4.6 cmindeg	341
3.113.4.7 cmaxdeg	342
3.113.4.8 count	342
3.113.4.9 cl2nd	342
3.113.4.10 nd2cl	342

3.113.4.11 cl2mcl	342
3.113.4.12 nnodes	342
3.113.4.13 nclass	342
3.114 flint::poly Class Reference	343
3.114.1 Detailed Description	343
3.114.2 Constructor & Destructor Documentation	343
3.114.2.1 poly()	343
3.114.2.2 ~poly()	343
3.114.3 Member Function Documentation	343
3.114.3.1 print()	343
3.114.4 Field Documentation	343
3.114.4.1 d	343
3.115 poly Class Reference	344
3.115.1 Detailed Description	345
3.115.2 Constructor & Destructor Documentation	345
3.115.2.1 poly() [1/3]	345
3.115.2.2 poly() [2/3]	346
3.115.2.3 poly() [3/3]	346
3.115.2.4 ~poly()	346
3.115.3 Member Function Documentation	346
3.115.3.1 operator+=()	346
3.115.3.2 operator-=()	346
3.115.3.3 operator*=()	346
3.115.3.4 operator/=()	347
3.115.3.5 operator%=()	347
3.115.3.6 operator+()	347
3.115.3.7 operator-()	347
3.115.3.8 operator*()	347
3.115.3.9 operator/()	347
3.115.3.10 operator%()	347
3.115.3.11 operator==()	348
3.115.3.12 operator"!=()	348
3.115.3.13 operator=()	348
3.115.3.14 operator[]() [1/2]	348
3.115.3.15 operator[]() [2/2]	348
3.115.3.16 termscopy()	348
3.115.3.17 check_memory()	348
3.115.3.18 expand_memory()	349
3.115.3.19 is_zero()	349
3.115.3.20 is_one()	349
3.115.3.21 is_integer()	349
3.115.3.22 is_monomial()	349

3.115.3.23 is_dense_univariate()	349
3.115.4 Description	349
3.115.5 Notes	350
3.115.5.1 sign()	350
3.115.5.2 degree()	350
3.115.5.3 total_degree()	350
3.115.5.4 first_variable()	350
3.115.5.5 number_of_terms()	350
3.115.5.6 all_variables()	350
3.115.5.7 integer_lcoeff()	351
3.115.5.8 lcoeff_univar()	351
3.115.5.9 lcoeff_multivar()	351
3.115.5.10 coefficient()	351
3.115.5.11 derivative()	351
3.115.5.12 setmod()	351
3.115.5.13 coefficients_modulo()	351
3.115.5.14 simple_poly() ^[1/2]	352
3.115.5.15 simple_poly() ^[2/2]	352
3.115.5.16 get_variables()	352
3.115.5.17 argument_to_poly()	352
3.115.5.18 poly_to_argument()	352
3.115.5.19 poly_to_argument_with_den()	353
3.115.5.20 size_of_form_notation()	353
3.115.5.21 size_of_form_notation_with_den()	353
3.115.5.22 normalize()	353
3.115.5.23 from_coefficient_list()	353
3.115.5.24 to_coefficient_list()	353
3.115.5.25 coefficient_list_divmod()	354
3.115.5.26 to_string()	354
3.115.5.27 monomial_compare()	354
3.115.5.28 last_monomial_index()	354
3.115.5.29 last_monomial()	354
3.115.5.30 compare_degree_vector()	354
3.115.5.31 degree_vector()	354
3.115.5.32 add()	355
3.115.5.33 sub()	355
3.115.5.34 mul()	355
3.115.6 Description	355
3.115.6.1 div()	356
3.115.6.2 mod()	356
3.115.6.3 divmod()	356
3.115.7 Description	356

3.115.7.1 divides()	357
3.115.7.2 mul_one_term()	357
3.115.7.3 mul_univar()	357
3.115.7.4 mul_heap()	357
3.115.8 Description	357
3.115.8.1 divmod_one_term()	358
3.115.8.2 divmod_univar()	358
3.115.9 Description	359
3.115.9.1 divmod_heap()	359
3.115.10 Description	359
3.115.10.1 push_heap()	360
3.115.10.2 pop_heap()	360
3.115.11 Field Documentation	361
3.115.11.1 terms	361
3.115.11.2 size_of_terms	361
3.115.11.3 modp	361
3.115.11.4 modn	361
3.116 flint::poly_factor Class Reference	361
3.116.1 Detailed Description	361
3.116.2 Constructor & Destructor Documentation	362
3.116.2.1 poly_factor()	362
3.116.2.2 ~poly_factor()	362
3.116.3 Field Documentation	362
3.116.3.1 d	362
3.117 POLYMOD Struct Reference	362
3.117.1 Detailed Description	362
3.117.2 Field Documentation	363
3.117.2.1 coefs	363
3.117.2.2 numsym	363
3.117.2.3 arraysize	363
3.117.2.4 polysize	363
3.117.2.5 modnum	363
3.118 PoSiTiOn Struct Reference	363
3.118.1 Detailed Description	363
3.118.2 Field Documentation	364
3.118.2.1 p1	364
3.119 PRELOAD Struct Reference	364
3.119.1 Detailed Description	364
3.119.2 Field Documentation	364
3.119.2.1 buffer	364
3.119.2.2 size	364
3.120 pReVaR Struct Reference	365

3.120.1 Detailed Description	365
3.120.2 Field Documentation	365
3.120.2.1 name	365
3.120.2.2 value	365
3.120.2.3 argnames	365
3.120.2.4 nargs	366
3.120.2.5 wildarg	366
3.121 PROCEDURE Struct Reference	366
3.121.1 Detailed Description	367
3.121.2 Field Documentation	367
3.121.2.1 p	367
3.121.2.2 name	367
3.121.2.3 loadmode	367
3.121.2.4 mustfree	367
3.122 Process Class Reference	367
3.122.1 Detailed Description	368
3.122.2 Constructor & Destructor Documentation	369
3.122.2.1 Process()	369
3.122.2.2 ~Process()	369
3.122.3 Member Function Documentation	369
3.122.3.1 prProcess()	369
3.122.3.2 outProcP()	369
3.122.3.3 prProcessP()	369
3.122.3.4 mkSProcess()	370
3.122.4 Field Documentation	370
3.122.4.1 model	370
3.122.4.2 opt	370
3.122.4.3 mgrcount	370
3.122.4.4 agrcount	370
3.122.4.5 initlPart	370
3.122.4.6 finalPart	370
3.122.4.7 id	371
3.122.4.8 ninitl	371
3.122.4.9 nfinal	371
3.122.4.10 ctotat	371
3.122.4.11 nExtern	371
3.122.4.12 loop	371
3.122.4.13 maxnlegs	371
3.122.4.14 clist	371
3.122.4.15 nSubproc	372
3.122.4.16 sptbl	372
3.122.4.17 sproc	372

3.122.4.18 astack	372
3.122.4.19 ngraphs	372
3.122.4.20 nopi	372
3.122.4.21 wgraphs	372
3.122.4.22 wopi	372
3.122.4.23 nMGraphs	373
3.122.4.24 nMOPI	373
3.122.4.25 wMGraphs	373
3.122.4.26 wMOPI	373
3.122.4.27 nAGraphs	373
3.122.4.28 nAOPI	373
3.122.4.29 wAGraphs	373
3.122.4.30 wAOPI	373
3.122.4.31 sec	374
3.123 R_const Struct Reference	374
3.123.1 Detailed Description	376
3.123.2 Field Documentation	376
3.123.2.1 StoreData	376
3.123.2.2 Fscr	376
3.123.2.3 FoStage4	376
3.123.2.4 DefPosition	376
3.123.2.5 infile	376
3.123.2.6 outfile	376
3.123.2.7 hidefile	377
3.123.2.8 CompressBuffer	377
3.123.2.9 ComprTop	377
3.123.2.10 CompressPointer	377
3.123.2.11 CompareRoutine	377
3.123.2.12 wranfia	377
3.123.2.13 moebiustable	377
3.123.2.14 OldTime	377
3.123.2.15 InInBuf	378
3.123.2.16 InHiBuf	378
3.123.2.17 pWorkSize	378
3.123.2.18 lWorkSize	378
3.123.2.19 posWorkSize	378
3.123.2.20 wranfseed	378
3.123.2.21 NoCompress	378
3.123.2.22 gzipCompress	378
3.123.2.23 Cnumlhs	379
3.123.2.24 outtohide	379
3.123.2.25 wranfcall	379

3.123.2.26 wranfnpair1	379
3.123.2.27 wranfnpair2	379
3.123.2.28 GetFile	379
3.123.2.29 KeptInHold	379
3.123.2.30 BracketOn	379
3.123.2.31 MaxBracket	380
3.123.2.32 CurDum	380
3.123.2.33 DeferFlag	380
3.123.2.34 TePos	380
3.123.2.35 sLevel	380
3.123.2.36 Stage4Name	380
3.123.2.37 GetOneFile	380
3.123.2.38 PolyFun	380
3.123.2.39 PolyFunInv	381
3.123.2.40 PolyFunType	381
3.123.2.41 PolyFunExp	381
3.123.2.42 PolyFunVar	381
3.123.2.43 PolyFunPow	381
3.123.2.44 Eside	381
3.123.2.45 MaxDum	381
3.123.2.46 level	381
3.123.2.47 expchanged	382
3.123.2.48 expflags	382
3.123.2.49 CurExpr	382
3.123.2.50 SortType	382
3.123.2.51 ShortSortCount	382
3.123.2.52 modeloptions	382
3.123.2.53 funoffset	382
3.123.2.54 moebiustablesizes	383
3.124 ReNuMbEr Struct Reference	383
3.124.1 Detailed Description	383
3.124.2 Field Documentation	384
3.124.2.1 startposition	384
3.124.2.2 symb	384
3.124.2.3 indi	384
3.124.2.4 vect	384
3.124.2.5 func	384
3.124.2.6 symnum	385
3.124.2.7 indnum	385
3.124.2.8 vecnum	385
3.124.2.9 funnum	385
3.125 S_const Struct Reference	386

3.125.1 Detailed Description	386
3.125.2 Field Documentation	386
3.125.2.1 MaxExprSize	386
3.125.2.2 OldOnFile	387
3.125.2.3 OldNumFactors	387
3.125.2.4 Oldvflags	387
3.125.2.5 Olduflags	387
3.125.2.6 NumOldOnFile	387
3.125.2.7 NumOldNumFactors	387
3.125.2.8 MultiThreaded	387
3.125.2.9 Balancing	387
3.125.2.10 ExecMode	388
3.125.2.11 CollectOverFlag	388
3.126 SeTs Struct Reference	388
3.126.1 Detailed Description	388
3.126.2 Field Documentation	388
3.126.2.1 name	388
3.126.2.2 type	388
3.126.2.3 first	389
3.126.2.4 last	389
3.126.2.5 node	389
3.126.2.6 namesize	389
3.126.2.7 dimension	389
3.126.2.8 flags	389
3.127 SETUPPARAMETERS Struct Reference	389
3.127.1 Detailed Description	390
3.127.2 Field Documentation	390
3.127.2.1 parameter	390
3.127.2.2 type	390
3.127.2.3 flags	390
3.127.2.4 value	390
3.128 SGroup Class Reference	391
3.128.1 Detailed Description	391
3.128.2 Constructor & Destructor Documentation	391
3.128.2.1 SGroup()	391
3.128.2.2 ~SGroup()	391
3.128.3 Member Function Documentation	392
3.128.3.1 print()	392
3.128.3.2 newGroup()	392
3.128.3.3 clearGroup()	392
3.128.3.4 delGroup()	392
3.128.3.5 genNext()	392

3.128.3.6 addGroup()	392
3.128.3.7 nElem()	393
3.128.3.8 nextElem()	393
3.128.4 Field Documentation	393
3.128.4.1 size	393
3.128.4.2 nelem	393
3.128.4.3 elem	393
3.128.4.4 nnodes	393
3.128.4.5 neclass	393
3.128.4.6 eclass	394
3.128.4.7 cgen	394
3.128.4.8 csav	394
3.128.4.9 permg	394
3.128.4.10 perms	394
3.128.4.11 pgr	394
3.128.4.12 pgq	394
3.128.4.13 psr	394
3.128.4.14 psq	395
3.129 SHvariables Struct Reference	395
3.129.1 Detailed Description	395
3.129.2 Field Documentation	395
3.129.2.1 outterm	395
3.129.2.2 outfun	395
3.129.2.3 incoef	396
3.129.2.4 stop1	396
3.129.2.5 stop2	396
3.129.2.6 ststop1	396
3.129.2.7 ststop2	396
3.129.2.8 finishuf	396
3.129.2.9 do_uffle	396
3.129.2.10 combilast	396
3.129.2.11 nincoef	397
3.129.2.12 level	397
3.129.2.13 thefunction	397
3.129.2.14 option	397
3.130 sOrT Struct Reference	397
3.130.1 Detailed Description	399
3.130.2 Field Documentation	399
3.130.2.1 file	399
3.130.2.2 SizeInFile	399
3.130.2.3 IBuffer	399
3.130.2.4 ITop	399

3.130.2.5 IFill	399
3.130.2.6 used	399
3.130.2.7 sBuffer	400
3.130.2.8 sTop	400
3.130.2.9 sTop2	400
3.130.2.10 sHalf	400
3.130.2.11 sFill	400
3.130.2.12 sPointer	400
3.130.2.13 PoinFill	400
3.130.2.14 cBuffer	400
3.130.2.15 Patches	401
3.130.2.16 pStop	401
3.130.2.17 poina	401
3.130.2.18 poin2a	401
3.130.2.19 ktoi	401
3.130.2.20 tree	401
3.130.2.21 fPatches	401
3.130.2.22 inPatches	401
3.130.2.23 fPatchesStop	402
3.130.2.24 iPatches	402
3.130.2.25 f	402
3.130.2.26 ff	402
3.130.2.27 sTerms	402
3.130.2.28 LargeSize	402
3.130.2.29 SmallSize	402
3.130.2.30 SmallEsize	402
3.130.2.31 TermsInSmall	403
3.130.2.32 Terms2InSmall	403
3.130.2.33 GenTerms	403
3.130.2.34 TermsLeft	403
3.130.2.35 GenSpace	403
3.130.2.36 SpaceLeft	403
3.130.2.37 putinsize	403
3.130.2.38 ninterms	403
3.130.2.39 MaxPatches	404
3.130.2.40 MaxFpatches	404
3.130.2.41 type	404
3.130.2.42 IPatch	404
3.130.2.43 fPatchN1	404
3.130.2.44 PolyWise	404
3.130.2.45 PolyFlag	404
3.130.2.46 cBufferSize	404

3.130.2.47 maxtermsize	405
3.130.2.48 newmaxtermsize	405
3.130.2.49 outputmode	405
3.130.2.50 stagelevel	405
3.130.2.51 fPatchN	405
3.130.2.52 inNum	405
3.130.2.53 stage4	405
3.131 SpecTatoR Struct Reference	406
3.131.1 Detailed Description	406
3.131.2 Field Documentation	406
3.131.2.1 position	406
3.131.2.2 readpos	406
3.131.2.3 fh	407
3.131.2.4 name	407
3.131.2.5 exprnumber	407
3.131.2.6 flags	407
3.132 SProcess Class Reference	407
3.132.1 Detailed Description	409
3.132.2 Constructor & Destructor Documentation	409
3.132.2.1 SProcess() [1/2]	409
3.132.2.2 SProcess() [2/2]	409
3.132.2.3 ~SProcess()	409
3.132.3 Member Function Documentation	409
3.132.3.1 prSProcess()	409
3.132.3.2 generate()	410
3.132.3.3 assign()	410
3.132.3.4 toMNodeClass()	410
3.132.3.5 match()	410
3.132.3.6 endMGraph()	410
3.132.3.7 endAGraph()	410
3.132.3.8 resultMGraph()	411
3.132.3.9 resultAGraph()	411
3.132.4 Field Documentation	411
3.132.4.1 model	411
3.132.4.2 proc	411
3.132.4.3 opt	411
3.132.4.4 pnclass	411
3.132.4.5 astack	412
3.132.4.6 mgraph	412
3.132.4.7 egraph	412
3.132.4.8 agraph	412
3.132.4.9 cl2nd	412

3.132.4.10 nd2cl	412
3.132.4.11 nclass	412
3.132.4.12 ninitl	412
3.132.4.13 nfinal	413
3.132.4.14 nvert	413
3.132.4.15 clist	413
3.132.4.16 id	413
3.132.4.17 loop	413
3.132.4.18 nNodes	413
3.132.4.19 nEdges	413
3.132.4.20 nExtern	413
3.132.4.21 ncouple	414
3.132.4.22 tCouple	414
3.132.4.23 DUMMY_PADDING	414
3.132.4.24 mgrcount	414
3.132.4.25 agrcount	414
3.132.4.26 extperm	414
3.132.4.27 nMGraphs	414
3.132.4.28 nMOPI	414
3.132.4.29 wMGraphs	415
3.132.4.30 wMOPI	415
3.132.4.31 nAGraphs	415
3.132.4.32 nAOPI	415
3.132.4.33 wAGraphs	415
3.132.4.34 wAOPI	415
3.133 StOrEcAcHe Struct Reference	416
3.133.1 Detailed Description	416
3.133.2 Field Documentation	416
3.133.2.1 position	416
3.133.2.2 toppos	416
3.133.2.3 next	417
3.133.2.4 buffer	417
3.134 STOREHEADER Struct Reference	417
3.134.1 Detailed Description	417
3.134.2 Field Documentation	418
3.134.2.1 headermark	418
3.134.2.2 lenWORD	418
3.134.2.3 lenLONG	418
3.134.2.4 lenPOS	418
3.134.2.5 lenPOINTER	418
3.134.2.6 endianness	419
3.134.2.7 sSym	419

3.134.2.8 sInd	419
3.134.2.9 sVec	419
3.134.2.10 sFun	419
3.134.2.11 maxpower	420
3.134.2.12 wildoffset	420
3.134.2.13 revision	420
3.134.2.14 reserved	420
3.135 Stream Struct Reference	420
3.135.1 Detailed Description	421
3.135.2 Field Documentation	421
3.135.2.1 fileposition	421
3.135.2.2 linenum	421
3.135.2.3 prevline	422
3.135.2.4 buffer	422
3.135.2.5 pointer	422
3.135.2.6 top	422
3.135.2.7 FoldName	422
3.135.2.8 name	422
3.135.2.9 pname	423
3.135.2.10 buffersize	423
3.135.2.11 bufferposition	423
3.135.2.12 inbuffer	423
3.135.2.13 previous	423
3.135.2.14 handle	423
3.135.2.15 type	423
3.135.2.16 prevars	424
3.135.2.17 previousNoShowInput	424
3.135.2.18 eqnum	424
3.135.2.19 afterwards	424
3.135.2.20 olddelay	424
3.135.2.21 oldnoshowninput	424
3.135.2.22 isnxtchar	424
3.135.2.23 nextchar	424
3.135.2.24 reserved	425
3.136 SuBbUf Struct Reference	425
3.136.1 Detailed Description	425
3.136.2 Field Documentation	425
3.136.2.1 subexpnum	425
3.136.2.2 buffernum	425
3.137 SWITCH Struct Reference	426
3.137.1 Detailed Description	426
3.137.2 Field Documentation	426

3.137.2.1 table	426
3.137.2.2 defaultcase	427
3.137.2.3 endswitch	427
3.137.2.4 typetable	427
3.137.2.5 maxcase	427
3.137.2.6 mincase	427
3.137.2.7 numcases	427
3.137.2.8 tablesizes	427
3.137.2.9 caseoffset	427
3.137.2.10 iflevel	428
3.137.2.11 whilelevel	428
3.137.2.12 nestingsum	428
3.137.2.13 padding	428
3.138 SWITCHTABLE Struct Reference	428
3.138.1 Detailed Description	428
3.138.2 Field Documentation	428
3.138.2.1 ncase	428
3.138.2.2 value	429
3.138.2.3 compbuffer	429
3.139 SyMbOI Struct Reference	429
3.139.1 Detailed Description	429
3.139.2 Field Documentation	429
3.139.2.1 name	429
3.139.2.2 minpower	429
3.139.2.3 maxpower	430
3.139.2.4 complex	430
3.139.2.5 number	430
3.139.2.6 flags	430
3.139.2.7 node	430
3.139.2.8 namesize	430
3.139.2.9 dimension	430
3.140 T_const Struct Reference	431
3.140.1 Detailed Description	433
3.140.2 Field Documentation	433
3.140.2.1 S0	433
3.140.2.2 SS	433
3.140.2.3 Nest	433
3.140.2.4 NestStop	433
3.140.2.5 NestPoin	434
3.140.2.6 BrackBuf	434
3.140.2.7 StoreCache	434
3.140.2.8 StoreCacheAlloc	434

3.140.2.9 pWorkSpace	434
3.140.2.10 IWorkSpace	434
3.140.2.11 posWorkSpace	434
3.140.2.12 WorkSpace	434
3.140.2.13 WorkTop	435
3.140.2.14 WorkPointer	435
3.140.2.15 RepCount	435
3.140.2.16 RepTop	435
3.140.2.17 WildArgTaken	435
3.140.2.18 factorials	435
3.140.2.19 small_power_n	435
3.140.2.20 small_power	435
3.140.2.21 bernoullis	436
3.140.2.22 primelist	436
3.140.2.23 pfac	436
3.140.2.24 pBer	436
3.140.2.25 TMaddr	436
3.140.2.26 WildMask	436
3.140.2.27 previousEfactor	436
3.140.2.28 TermMemHeap	436
3.140.2.29 NumberMemHeap	437
3.140.2.30 CacheNumberMemHeap	437
3.140.2.31 bracketinfo	437
3.140.2.32 ListPoly	437
3.140.2.33 ListSymbols	437
3.140.2.34 NumMem	437
3.140.2.35 TopologiesTerm	437
3.140.2.36 TopologiesStart	437
3.140.2.37 partitions	438
3.140.2.38 sBer	438
3.140.2.39 pWorkPointer	438
3.140.2.40 IWorkPointer	438
3.140.2.41 posWorkPointer	438
3.140.2.42 InNumMem	438
3.140.2.43 sfact	438
3.140.2.44 mfac	438
3.140.2.45 ebufnum	439
3.140.2.46 fbufnum	439
3.140.2.47 allbufnum	439
3.140.2.48 aebufnum	439
3.140.2.49 idallflag	439
3.140.2.50 idallnum	439

3.140.2.51 idallmaxnum	439
3.140.2.52 WildcardBufferSize	439
3.140.2.53 TermMemMax	440
3.140.2.54 TermMemTop	440
3.140.2.55 NumberMemMax	440
3.140.2.56 NumberMemTop	440
3.140.2.57 CacheNumberMemMax	440
3.140.2.58 CacheNumberMemTop	440
3.140.2.59 bracketindexflag	440
3.140.2.60 optentimes	440
3.140.2.61 ListSymbolsSize	441
3.140.2.62 NumListSymbols	441
3.140.2.63 numpoly	441
3.140.2.64 LeaveNegative	441
3.140.2.65 TrimPower	441
3.140.2.66 small_power_maxx	441
3.140.2.67 small_power_maxn	441
3.140.2.68 dummysubexp	441
3.140.2.69 comsym	442
3.140.2.70 comnum	442
3.140.2.71 comfun	442
3.140.2.72 comind	442
3.140.2.73 MinVecArg	442
3.140.2.74 FunArg	442
3.140.2.75 locwildvalue	442
3.140.2.76 mulpat	442
3.140.2.77 proexp	443
3.140.2.78 TMout	443
3.140.2.79 TMbuff	443
3.140.2.80 TMdolfac	443
3.140.2.81 nfac	443
3.140.2.82 nBer	443
3.140.2.83 mBer	443
3.140.2.84 PolyAct	443
3.140.2.85 RecFlag	444
3.140.2.86 inprimelist	444
3.140.2.87 sizeprimelist	444
3.140.2.88 fromindex	444
3.140.2.89 setinterntopo	444
3.140.2.90 setexterntopo	444
3.140.2.91 TopologiesLevel	444
3.140.2.92 TopologiesOptions	445

3.141 T_EEdge Class Reference	445
3.141.1 Detailed Description	445
3.141.2 Field Documentation	445
3.141.2.1 nodes	445
3.141.2.2 ext	445
3.141.2.3 momn	445
3.141.2.4 momc	446
3.141.2.5 padding	446
3.142 T_EGraph Class Reference	446
3.142.1 Detailed Description	447
3.142.2 Constructor & Destructor Documentation	447
3.142.2.1 T_EGraph()	447
3.142.2.2 ~T_EGraph()	447
3.142.3 Member Function Documentation	447
3.142.3.1 print()	447
3.142.3.2 init()	448
3.142.3.3 setExtern()	448
3.142.3.4 endSetExtern()	448
3.142.4 Field Documentation	448
3.142.4.1 gld	448
3.142.4.2 pld	448
3.142.4.3 nNodes	448
3.142.4.4 nEdges	449
3.142.4.5 maxdeg	449
3.142.4.6 nExtern	449
3.142.4.7 opi	449
3.142.4.8 nsym	449
3.142.4.9 esym	449
3.142.4.10 nodes	449
3.142.4.11 edges	450
3.143 T_ENode Class Reference	450
3.143.1 Detailed Description	450
3.143.2 Field Documentation	450
3.143.2.1 deg	450
3.143.2.2 ext	450
3.143.2.3 edges	450
3.144 T_MGraph Class Reference	451
3.144.1 Detailed Description	452
3.144.2 Constructor & Destructor Documentation	452
3.144.2.1 T_MGraph()	452
3.144.2.2 ~T_MGraph()	452
3.144.3 Member Function Documentation	452

3.144.3.1 generate()	452
3.144.4 Field Documentation	452
3.144.4.1 pld	452
3.144.4.2 nNodes	452
3.144.4.3 nEdges	453
3.144.4.4 nLoops	453
3.144.4.5 nodes	453
3.144.4.6 clist	453
3.144.4.7 nClasses	453
3.144.4.8 mindeg	453
3.144.4.9 maxdeg	453
3.144.4.10 selOPI	453
3.144.4.11 ndiag	454
3.144.4.12 n1PI	454
3.144.4.13 nBridges	454
3.144.4.14 c1PI	454
3.144.4.15 adjMat	454
3.144.4.16 nsym	454
3.144.4.17 esym	454
3.144.4.18 wsum	454
3.144.4.19 wsopi	455
3.144.4.20 curcl	455
3.144.4.21 egraph	455
3.144.4.22 ngen	455
3.144.4.23 ngconn	455
3.144.4.24 nCallRefine	455
3.144.4.25 discardOrd	455
3.144.4.26 discardRefine	455
3.144.4.27 discardDisc	456
3.144.4.28 discardIso	456
3.145 T_MNode Class Reference	456
3.145.1 Detailed Description	456
3.145.2 Constructor & Destructor Documentation	456
3.145.2.1 T_MNode()	456
3.145.3 Field Documentation	457
3.145.3.1 id	457
3.145.3.2 deg	457
3.145.3.3 cls	457
3.145.3.4 ext	457
3.145.3.5 freelg	457
3.145.3.6 visited	457
3.146 T_MNodeClass Class Reference	458

3.146.1 Detailed Description	458
3.146.2 Constructor & Destructor Documentation	458
3.146.2.1 T_MNodeClass()	458
3.146.2.2 ~T_MNodeClass()	458
3.146.3 Member Function Documentation	459
3.146.3.1 init()	459
3.146.3.2 copy()	459
3.146.3.3 clCmp()	459
3.146.3.4 printMat()	459
3.146.3.5 mkFlist()	459
3.146.3.6 mkNdCI()	459
3.146.3.7 mkCIMat()	460
3.146.3.8 incMat()	460
3.146.3.9 chkOrd()	460
3.146.3.10 cmpArray()	460
3.146.4 Field Documentation	460
3.146.4.1 nNodes	460
3.146.4.2 nClasses	460
3.146.4.3 clist	461
3.146.4.4 ndcl	461
3.146.4.5 clmat	461
3.146.4.6 flist	461
3.146.4.7 maxdeg	461
3.146.4.8 forallignment	461
3.147 TaBIEbAsE Struct Reference	462
3.147.1 Detailed Description	462
3.147.2 Field Documentation	462
3.147.2.1 fillpoint	462
3.147.2.2 current	462
3.147.2.3 name	463
3.147.2.4 tablenumbers	463
3.147.2.5 subindex	463
3.147.2.6 numtables	463
3.148 TaBIEbAsEsUbInDeX Struct Reference	463
3.148.1 Detailed Description	464
3.148.2 Field Documentation	464
3.148.2.1 where	464
3.148.2.2 size	464
3.149 TaBIEs Struct Reference	464
3.149.1 Detailed Description	465
3.149.2 Field Documentation	465
3.149.2.1 tablepointers	465

3.149.2.2 prototype	466
3.149.2.3 pattern	466
3.149.2.4 mm	466
3.149.2.5 flags	466
3.149.2.6 boomlijst	466
3.149.2.7 argtail	467
3.149.2.8 spare	467
3.149.2.9 buffers	467
3.149.2.10 totind	467
3.149.2.11 reserved	467
3.149.2.12 defined	468
3.149.2.13 mdefined	468
3.149.2.14 prototypeSize	468
3.149.2.15 numind	468
3.149.2.16 bounds	468
3.149.2.17 strict	468
3.149.2.18 sparse	469
3.149.2.19 numtree	469
3.149.2.20 rootnum	469
3.149.2.21 MaxTreeSize	469
3.149.2.22 bufnum	469
3.149.2.23 bufferssize	470
3.149.2.24 buffersfill	470
3.149.2.25 tablenum	470
3.149.2.26 mode	470
3.149.2.27 numdummies	470
3.150 TERMINFO Struct Reference	471
3.150.1 Detailed Description	471
3.150.2 Field Documentation	471
3.150.2.1 term	471
3.150.2.2 currentModel	471
3.150.2.3 currentMODEL	471
3.150.2.4 legcouple	471
3.150.2.5 numtopo	472
3.150.2.6 numdia	472
3.150.2.7 diaoffset	472
3.150.2.8 level	472
3.150.2.9 externalset	472
3.150.2.10 internalset	472
3.150.2.11 numextern	472
3.150.2.12 flags	473
3.151 ToPoTyPe Struct Reference	473

3.151.1 Detailed Description	473
3.151.2 Field Documentation	474
3.151.2.1 vert	474
3.151.2.2 vertmax	474
3.151.2.3 opt	474
3.151.2.4 cldeg	474
3.151.2.5 cnum	474
3.151.2.6 clext	474
3.151.2.7 cmind	474
3.151.2.8 cmaxd	475
3.151.2.9 ncl	475
3.151.2.10 nvert [1/2]	475
3.151.2.11 nloops	475
3.151.2.12 nlegs	475
3.151.2.13 npadding	475
3.151.2.14 nvert [2/2]	475
3.151.2.15 sopi	476
3.152 TrAcEn Struct Reference	476
3.152.1 Detailed Description	476
3.152.2 Field Documentation	476
3.152.2.1 accu	476
3.152.2.2 accup	476
3.152.2.3 temp	477
3.152.2.4 perm	477
3.152.2.5 inlist	477
3.152.2.6 sgn	477
3.152.2.7 num	477
3.152.2.8 level	477
3.152.2.9 factor	477
3.152.2.10 allsign	478
3.153 TrAcEs Struct Reference	478
3.153.1 Detailed Description	479
3.153.2 Field Documentation	479
3.153.2.1 accu	479
3.153.2.2 accup	479
3.153.2.3 temp	479
3.153.2.4 perm	479
3.153.2.5 inlist	479
3.153.2.6 nt3	479
3.153.2.7 nt4	480
3.153.2.8 j3	480
3.153.2.9 j4	480

3.153.2.10 e3	480
3.153.2.11 e4	480
3.153.2.12 eers	480
3.153.2.13 mepf	480
3.153.2.14 mdel	480
3.153.2.15 pepf	481
3.153.2.16 pdel	481
3.153.2.17 sgn	481
3.153.2.18 stap	481
3.153.2.19 step1	481
3.153.2.20 kstep	481
3.153.2.21 mdum	481
3.153.2.22 gamm	481
3.153.2.23 ad	482
3.153.2.24 a3	482
3.153.2.25 a4	482
3.153.2.26 lc3	482
3.153.2.27 lc4	482
3.153.2.28 sign1	482
3.153.2.29 sign2	482
3.153.2.30 gamma5	482
3.153.2.31 num	483
3.153.2.32 level	483
3.153.2.33 factor	483
3.153.2.34 allsign	483
3.153.2.35 finalstep	483
3.154 tree Struct Reference	483
3.154.1 Detailed Description	484
3.154.2 Field Documentation	484
3.154.2.1 parent	484
3.154.2.2 left	484
3.154.2.3 right	484
3.154.2.4 value	484
3.154.2.5 blnce	485
3.154.2.6 usage	485
3.155 tree_node Class Reference	485
3.155.1 Detailed Description	486
3.155.2 Constructor & Destructor Documentation	486
3.155.2.1 tree_node() [1/2]	486
3.155.2.2 tree_node() [2/2]	486
3.155.3 Member Function Documentation	486
3.155.3.1 operator=()	486

3.155.4 Field Documentation	486
3.155.4.1 childs	486
3.155.4.2 sum_results	487
3.155.4.3 num_visits	487
3.155.4.4 var	487
3.155.4.5 finished	487
3.156 VaRrEnUm Struct Reference	487
3.156.1 Detailed Description	487
3.156.2 Field Documentation	488
3.156.2.1 start	488
3.156.2.2 lo	488
3.156.2.3 hi	488
3.157 VeCtOr Struct Reference	488
3.157.1 Detailed Description	489
3.157.2 Field Documentation	489
3.157.2.1 name	489
3.157.2.2 complex	489
3.157.2.3 number	489
3.157.2.4 flags	489
3.157.2.5 node	489
3.157.2.6 namesize	489
3.157.2.7 dimension	490
3.158 VeRtEx Struct Reference	490
3.158.1 Detailed Description	490
3.158.2 Field Documentation	490
3.158.2.1 particles	490
3.158.2.2 couplings	491
3.158.2.3 nparticles	491
3.158.2.4 ncouplings	491
3.158.2.5 type	491
3.158.2.6 error	491
3.158.2.7 externonly	491
3.158.2.8 spare	491
3.159 X_const Struct Reference	492
3.159.1 Detailed Description	492
3.159.2 Field Documentation	492
3.159.2.1 currentPrompt	492
3.159.2.2 shellname	492
3.159.2.3 stderrname	492
3.159.2.4 timeout	492
3.159.2.5 killSignal	493
3.159.2.6 killWholeGroup	493

3.159.2.7 daemonize	493
3.159.2.8 currentExternalChannel	493
4 File Documentation	495
4.1 argument.c File Reference	495
4.1.1 Detailed Description	496
4.1.2 Macro Definition Documentation	496
4.1.2.1 NEWORDER	496
4.1.3 Function Documentation	496
4.1.3.1 execarg()	496
4.1.3.2 execterm()	496
4.1.3.3 ArgumentImplode()	496
4.1.3.4 ArgumentExplode()	497
4.1.3.5 ArgFactorize()	497
4.1.3.6 FindArg()	497
4.1.3.7 InsertArg()	497
4.1.3.8 CleanupArgCache()	498
4.1.3.9 ArgSymbolMerge()	498
4.1.3.10 ArgDotproductMerge()	498
4.1.3.11 TakeArgContent()	499
4.1.3.12 MakeInteger()	499
4.1.3.13 MakeMod()	500
4.1.3.14 SortWeights()	500
4.2 argument.c	501
4.3 bugtool.c File Reference	541
4.3.1 Detailed Description	541
4.3.2 Function Documentation	542
4.3.2.1 ExprStatus()	542
4.4 bugtool.c	542
4.5 checkpoint.c File Reference	543
4.5.1 Detailed Description	544
4.5.2 Macro Definition Documentation	544
4.5.2.1 CACHED_SNAPSHOT	544
4.5.2.2 CACHE_SIZE	544
4.5.2.3 R_FREE	545
4.5.2.4 R_FREE_NAMETREE	545
4.5.2.5 R_FREE_STREAM	545
4.5.2.6 R_SET	545
4.5.2.7 R_COPY_B	545
4.5.2.8 S_WRITE_B	546
4.5.2.9 S_FLUSH_B	546
4.5.2.10 R_COPY_S	546

4.5.2.11 S_WRITE_S	546
4.5.2.12 R_COPY_LIST	546
4.5.2.13 S_WRITE_LIST	547
4.5.2.14 R_COPY_NAMETREE	547
4.5.2.15 S_WRITE_NAMETREE	547
4.5.2.16 S_WRITE_DOLLAR	547
4.5.2.17 ANNOUNCE	548
4.5.3 Function Documentation	548
4.5.3.1 CheckRecoveryFile()	548
4.5.3.2 DeleteRecoveryFile()	548
4.5.3.3 RecoveryFilename()	548
4.5.3.4 InitRecovery()	549
4.5.3.5 fwrite_cached()	549
4.5.3.6 flush_cache()	549
4.5.3.7 DoRecovery()	549
4.5.3.8 DoCheckpoint()	550
4.5.4 Variable Documentation	551
4.5.4.1 cache_buffer	551
4.5.4.2 cache_fill	551
4.6 checkpoint.c	551
4.7 comexpr.c File Reference	587
4.7.1 Detailed Description	588
4.7.2 Function Documentation	588
4.7.2.1 CoLocal()	588
4.7.2.2 CoGlobal()	588
4.7.2.3 CoLocalFactorized()	588
4.7.2.4 CoGlobalFactorized()	588
4.7.2.5 DoExpr()	588
4.7.2.6 ColdOld()	589
4.7.2.7 Cold()	589
4.7.2.8 ColdNew()	589
4.7.2.9 CoDisorder()	589
4.7.2.10 CoMany()	589
4.7.2.11 CoMulti()	589
4.7.2.12 ColfMatch()	589
4.7.2.13 ColfNoMatch()	590
4.7.2.14 CoOnce()	590
4.7.2.15 CoOnly()	590
4.7.2.16 CoSelect()	590
4.7.2.17 ColdExpression()	590
4.7.2.18 CoMultiply()	590
4.7.2.19 CoFill()	590

4.7.2.20 CoFillExpression()	591
4.7.2.21 CoPrintTable()	591
4.7.2.22 CoAssign()	591
4.7.2.23 CoDeallocateTable()	591
4.8 comexpr.c	591
4.9 compcomm.c File Reference	615
4.9.1 Detailed Description	618
4.9.2 Function Documentation	618
4.9.2.1 CoFormat()	618
4.9.2.2 CoCollect()	618
4.9.2.3 setonoff()	618
4.9.2.4 CoCompress()	619
4.9.2.5 CoFlags()	619
4.9.2.6 CoOff()	619
4.9.2.7 CoOn()	619
4.9.2.8 CoInsideFirst()	619
4.9.2.9 CoProperCount()	619
4.9.2.10 CoDelete()	619
4.9.2.11 CoKeep()	620
4.9.2.12 CoFixIndex()	620
4.9.2.13 CoMetric()	620
4.9.2.14 DoPrint()	620
4.9.2.15 CoPrint()	620
4.9.2.16 CoPrintB()	620
4.9.2.17 CoNPrint()	620
4.9.2.18 CoPushHide()	621
4.9.2.19 CoPopHide()	621
4.9.2.20 SetExprCases()	621
4.9.2.21 SetExpr()	621
4.9.2.22 CoDrop()	621
4.9.2.23 CoNoDrop()	621
4.9.2.24 CoSkip()	622
4.9.2.25 CoNoSkip()	622
4.9.2.26 CoHide()	622
4.9.2.27 CoIntoHide()	622
4.9.2.28 CoNoIntoHide()	622
4.9.2.29 CoNoHide()	622
4.9.2.30 CoUnHide()	622
4.9.2.31 CoNoUnHide()	623
4.9.2.32 AddToCom()	623
4.9.2.33 AddComString()	623
4.9.2.34 Add2ComStrings()	623

4.9.2.35 CoDiscard()	623
4.9.2.36 CoContract()	623
4.9.2.37 CoGoTo()	624
4.9.2.38 CoLabel()	624
4.9.2.39 DoArgument()	624
4.9.2.40 CoArgument()	624
4.9.2.41 CoEndArgument()	624
4.9.2.42 CoInside()	624
4.9.2.43 CoEndInside()	624
4.9.2.44 CoNormalize()	625
4.9.2.45 CoMakeInteger()	625
4.9.2.46 CoSplitArg()	625
4.9.2.47 CoSplitFirstArg()	625
4.9.2.48 CoSplitLastArg()	625
4.9.2.49 CoFactArg()	625
4.9.2.50 DoSymmetrize()	625
4.9.2.51 CoSymmetrize()	626
4.9.2.52 CoAntiSymmetrize()	626
4.9.2.53 CoCycleSymmetrize()	626
4.9.2.54 CoRCycleSymmetrize()	626
4.9.2.55 CoWrite()	626
4.9.2.56 CoNWrite()	626
4.9.2.57 CoRatio()	626
4.9.2.58 CoRedefine()	627
4.9.2.59 CoRenumber()	627
4.9.2.60 CoSum()	627
4.9.2.61 CoToTensor()	627
4.9.2.62 CoToVector()	627
4.9.2.63 CoTrace4()	627
4.9.2.64 CoTraceN()	627
4.9.2.65 CoChisholm()	628
4.9.2.66 DoChain()	628
4.9.2.67 CoChainin()	628
4.9.2.68 CoChainout()	628
4.9.2.69 CoExit()	628
4.9.2.70 CoInParallel()	628
4.9.2.71 CoNotInParallel()	628
4.9.2.72 DoInParallel()	629
4.9.2.73 CoInExpression()	629
4.9.2.74 CoEndInExpression()	629
4.9.2.75 CoSetExitFlag()	629
4.9.2.76 CoTryReplace()	629

4.9.2.77 CoModulus()	629
4.9.2.78 CoRepeat()	629
4.9.2.79 CoEndRepeat()	630
4.9.2.80 DoBrackets()	630
4.9.2.81 CoBracket()	630
4.9.2.82 CoAntiBracket()	630
4.9.2.83 CoMultiBracket()	630
4.9.2.84 CountComp()	630
4.9.2.85 Colf()	630
4.9.2.86 CoElse()	631
4.9.2.87 CoElseif()	631
4.9.2.88 CoEndIf()	631
4.9.2.89 CoWhile()	631
4.9.2.90 CoEndWhile()	631
4.9.2.91 DoFindLoop()	631
4.9.2.92 CoFindLoop()	631
4.9.2.93 CoReplaceLoop()	632
4.9.2.94 CoFunPowers()	632
4.9.2.95 CoUnitTrace()	632
4.9.2.96 CoTerm()	632
4.9.2.97 CoEndTerm()	632
4.9.2.98 CoSort()	632
4.9.2.99 CoPolyFun()	632
4.9.2.100 CoPolyRatFun()	633
4.9.2.101 CoMerge()	633
4.9.2.102 CoShuffle()	633
4.9.2.103 CoProcessBucket()	633
4.9.2.104 CoThreadBucket()	633
4.9.2.105 DoArgPlode()	633
4.9.2.106 CoArgExplode()	633
4.9.2.107 CoArgImplode()	634
4.9.2.108 CoClearTable()	634
4.9.2.109 CoDenominators()	634
4.9.2.110 CoDropCoefficient()	634
4.9.2.111 CoDropSymbols()	634
4.9.2.112 CoToPolynomial()	634
4.9.2.113 CoFromPolynomial()	634
4.9.2.114 CoArgToExtraSymbol()	635
4.9.2.115 CoExtraSymbols()	635
4.9.2.116 GetIfDollarFactor()	635
4.9.2.117 GetDoParam()	635
4.9.2.118 CoDo()	635

4.9.2.119 CoEndDo()	635
4.9.2.120 CoFactDollar()	636
4.9.2.121 CoFactorize()	636
4.9.2.122 CoNFactorize()	636
4.9.2.123 CoUnFactorize()	636
4.9.2.124 CoNUnFactorize()	636
4.9.2.125 DoFactorize()	636
4.9.2.126 CoOptimizeOption()	636
4.9.2.127 CoPutInside()	637
4.9.2.128 CoAntiPutInside()	637
4.9.2.129 DoPutInside()	637
4.9.2.130 CoSwitch()	637
4.9.2.131 CoCase()	637
4.9.2.132 CoBreak()	637
4.9.2.133 CoDefault()	637
4.9.2.134 CoEndSwitch()	638
4.9.2.135 CoSetUserFlag()	638
4.9.2.136 CoClearUserFlag()	638
4.9.2.137 CoCreateAllLoops()	638
4.9.2.138 CoCreateAllPaths()	638
4.9.2.139 CoCreateAll()	638
4.10 compcomm.c	639
4.11 compiler.c File Reference	728
4.11.1 Detailed Description	729
4.11.2 Macro Definition Documentation	730
4.11.2.1 OPTION0	730
4.11.2.2 OPTION1	730
4.11.2.3 OPTION2	730
4.11.2.4 REDUCESUBEXPBUFFERS	730
4.11.3 Function Documentation	730
4.11.3.1 inictable()	730
4.11.3.2 findcommand()	730
4.11.3.3 ParenthesesTest()	731
4.11.3.4 SkipAName()	731
4.11.3.5 IsRHS()	731
4.11.3.6 IsIdStatement()	731
4.11.3.7 CompileAlgebra()	731
4.11.3.8 CompileStatement()	731
4.11.3.9 TestTables()	732
4.11.3.10 CompileSubExpressions()	732
4.11.3.11 CodeGenerator()	732
4.11.3.12 CompleteTerm()	732

4.11.3.13 CodeFactors()	732
4.11.3.14 GenerateFactors()	732
4.11.4 Variable Documentation	733
4.11.4.1 alfatable1	733
4.11.4.2 subexpbuffers	733
4.11.4.3 topsubexpbuffers	733
4.11.4.4 insubexpbuffers	733
4.12 compiler.c	733
4.13 compress.c File Reference	760
4.13.1 Detailed Description	760
4.14 compress.c	760
4.15 comtool.c File Reference	769
4.15.1 Detailed Description	769
4.15.2 Function Documentation	770
4.15.2.1 inicbufs()	770
4.15.2.2 finishcbuf()	770
4.15.2.3 clearcbuf()	770
4.15.2.4 DoubleCbuffer()	771
4.15.2.5 AddLHS()	771
4.15.2.6 AddRHS()	771
4.15.2.7 AddNtoL()	772
4.15.2.8 AddNtoC()	773
4.15.2.9 InsTree()	774
4.15.2.10 FindTree()	774
4.15.2.11 RedoTree()	774
4.15.2.12 ClearTree()	774
4.15.2.13 IniFbuffer()	774
4.15.2.14 numcommute()	774
4.16 comtool.c	775
4.17 comtool.h File Reference	782
4.17.1 Detailed Description	782
4.18 comtool.h	783
4.19 declare.h File Reference	784
4.19.1 Detailed Description	806
4.19.2 Macro Definition Documentation	806
4.19.2.1 MaX	806
4.19.2.2 MiN	806
4.19.2.3 ABS	806
4.19.2.4 SGN	806
4.19.2.5 REDLENG	807
4.19.2.6 INCLENG	807
4.19.2.7 GETCOEF	807

4.19.2.8 GETSTOP	807
4.19.2.9 StuffAdd	807
4.19.2.10 EXCHN	807
4.19.2.11 EXCH	808
4.19.2.12 TOKENTOLINE	808
4.19.2.13 UngetFromStream	808
4.19.2.14 AddLineFeed	808
4.19.2.15 TryRecover	808
4.19.2.16 UngetChar	808
4.19.2.17 ParseNumber	809
4.19.2.18 ParseSign	809
4.19.2.19 ParseSignedNumber	809
4.19.2.20 NCOPY	809
4.19.2.21 NCOPYI	809
4.19.2.22 NCOPYB	810
4.19.2.23 NCOPYI32	810
4.19.2.24 WCOPY	810
4.19.2.25 NeedNumber	810
4.19.2.26 SKIPBLANKS	810
4.19.2.27 FLUSHCONSOLE	811
4.19.2.28 SKIPBRA1	811
4.19.2.29 SKIPBRA2	811
4.19.2.30 SKIPBRA3	811
4.19.2.31 SKIPBRA4	811
4.19.2.32 SKIPBRA5	812
4.19.2.33 CYCLE1	812
4.19.2.34 AddToCB	812
4.19.2.35 EXCHINOUT	812
4.19.2.36 BACKINOUT	812
4.19.2.37 CopyArg	813
4.19.2.38 FILLARG	813
4.19.2.39 COPYARG	813
4.19.2.40 ZEROARG	813
4.19.2.41 FILLFUN	813
4.19.2.42 COPYFUN	813
4.19.2.43 COPYFUN3	814
4.19.2.44 FILLFUN3	814
4.19.2.45 FILLSUB	814
4.19.2.46 COPYSUB	814
4.19.2.47 FILLEXPR	814
4.19.2.48 NEXTARG	814
4.19.2.49 COPY1ARG	815

4.19.2.50 ZeroFillRange	815
4.19.2.51 TABLESIZE	815
4.19.2.52 WORDDIF	815
4.19.2.53 wsizeof	816
4.19.2.54 VARNAME	816
4.19.2.55 DOLLARNAME	816
4.19.2.56 EXPRNAME	816
4.19.2.57 PREV	816
4.19.2.58 Terminate	816
4.19.2.59 SETERROR	816
4.19.2.60 DUMMYUSE	817
4.19.2.61 ADDPOS	817
4.19.2.62 SETBASELENGTH	817
4.19.2.63 SETBASEPOSITION	817
4.19.2.64 ISEQUALPOSINC	817
4.19.2.65 ISGEPOSINC	817
4.19.2.66 DIVPOS	818
4.19.2.67 MULPOS	818
4.19.2.68 DIFPOS	818
4.19.2.69 DIFBASE	818
4.19.2.70 ADD2POS	818
4.19.2.71 PUTZERO	818
4.19.2.72 BASEPOSITION	819
4.19.2.73 SETSTARTPOS	819
4.19.2.74 NOTSTARTPOS	819
4.19.2.75 ISMINPOS	819
4.19.2.76 ISEQUALPOS	819
4.19.2.77 ISNOTEQUALPOS	819
4.19.2.78 ISLESSPOS	820
4.19.2.79 ISGEPOS	820
4.19.2.80 ISNOTZEROPOS	820
4.19.2.81 ISZEROPOS	820
4.19.2.82 ISPOSPOS	820
4.19.2.83 ISNEGPOS	820
4.19.2.84 TOLONG	820
4.19.2.85 Add2Com	821
4.19.2.86 Add3Com	821
4.19.2.87 Add4Com	821
4.19.2.88 Add5Com	821
4.19.2.89 WantAddPointers	821
4.19.2.90 WantAddLongs	822
4.19.2.91 WantAddPositions	822

4.19.2.92 FORM_INLINE	822
4.19.2.93 MEMORYMACROS	822
4.19.2.94 TermMalloc	822
4.19.2.95 NumberMalloc	822
4.19.2.96 CacheNumberMalloc	823
4.19.2.97 TermFree	823
4.19.2.98 NumberFree	823
4.19.2.99 CacheNumberFree	823
4.19.2.100 NestingChecksum	823
4.19.2.101 MesNesting	823
4.19.2.102 MarkPolyRatFunDirty	824
4.19.2.103 PUSHPREASSIGNLEVEL	824
4.19.2.104 POPPREASSIGNLEVEL	824
4.19.2.105 EXTERNLOCK	824
4.19.2.106 INILOCK	824
4.19.2.107 LOCK	825
4.19.2.108 UNLOCK	825
4.19.2.109 EXTERNRWLOCK	825
4.19.2.110 INIRWLOCK	825
4.19.2.111 RWLOCKR	825
4.19.2.112 RWLOCKW	825
4.19.2.113 UNRWLOCK	825
4.19.2.114 MLOCK	826
4.19.2.115 MUNLOCK	826
4.19.2.116 GETIDENTITY	826
4.19.2.117 GETBIDENTITY	826
4.19.2.118 M_alloc	826
4.19.2.119 CompareTerms	826
4.19.2.120 FiniShuffle	826
4.19.2.121 DoShtuffle	827
4.19.3 Typedef Documentation	827
4.19.3.1 WRITEBUFTOEXTCHANNEL	827
4.19.3.2 GETCFROMEXTCHANNEL	827
4.19.3.3 SETTERMINATORFOREXTERNALCHANNEL	827
4.19.3.4 SETKILLMODEFOREXTERNALCHANNEL	827
4.19.3.5 WRITEFILE	827
4.19.3.6 GETTERM	827
4.19.4 Function Documentation	828
4.19.4.1 TELLFILE()	828
4.19.4.2 StartVariables()	828
4.19.4.3 CodeToLine()	828
4.19.4.4 AddArrayIndex()	829

4.19.4.5 FindInIndex()	829
4.19.4.6 NextFileIndex()	829
4.19.4.7 PasteTerm()	829
4.19.4.8 StrCopy()	830
4.19.4.9 WrtPower()	830
4.19.4.10 AccumGCD()	830
4.19.4.11 AddArgs()	830
4.19.4.12 AddCoef()	831
4.19.4.13 AddLong()	831
4.19.4.14 AddPLon()	831
4.19.4.15 AddPoly()	832
4.19.4.16 AddRat()	833
4.19.4.17 AddToLine()	833
4.19.4.18 AddWild()	833
4.19.4.19 BigLong()	833
4.19.4.20 BinomGen()	833
4.19.4.21 CheckWild()	834
4.19.4.22 Chisholm()	834
4.19.4.23 CleanExpr()	834
4.19.4.24 CleanUp()	834
4.19.4.25 ClearWild()	834
4.19.4.26 CompareFunctions()	834
4.19.4.27 Commute()	835
4.19.4.28 DetCommu()	835
4.19.4.29 DoesCommu()	835
4.19.4.30 CompArg()	835
4.19.4.31 CompCoef()	835
4.19.4.32 CompGroup()	836
4.19.4.33 Compare1()	836
4.19.4.34 CountDo()	837
4.19.4.35 CountFun()	837
4.19.4.36 DimensionSubterm()	837
4.19.4.37 DimensionTerm()	837
4.19.4.38 DimensionExpression()	837
4.19.4.39 Deferred()	837
4.19.4.40 DeleteStore()	838
4.19.4.41 DetCurDum()	838
4.19.4.42 DetVars()	839
4.19.4.43 Distribute()	839
4.19.4.44 DivLong()	839
4.19.4.45 DivRat()	839
4.19.4.46 Divvy()	839

4.19.4.47 DoDelta()	840
4.19.4.48 DoDelta3()	840
4.19.4.49 TestPartitions()	840
4.19.4.50 DoPartitions()	840
4.19.4.51 CoCanonicalize()	840
4.19.4.52 DoCanonicalize()	840
4.19.4.53 GenTopologies()	841
4.19.4.54 GenDiagrams()	841
4.19.4.55 DoTopologyCanonicalize()	841
4.19.4.56 DoShattering()	841
4.19.4.57 GenerateTopologies()	841
4.19.4.58 DoTableExpansion()	842
4.19.4.59 DoDistrib()	842
4.19.4.60 DoShuffle()	842
4.19.4.61 DoPermutations()	842
4.19.4.62 Shuffle()	842
4.19.4.63 FinishShuffle()	842
4.19.4.64 DoStuffle()	843
4.19.4.65 Stuffle()	843
4.19.4.66 FinishStuffle()	843
4.19.4.67 StuffRootAdd()	843
4.19.4.68 TestUse()	843
4.19.4.69 FindTB()	843
4.19.4.70 CheckTableDeclarations()	844
4.19.4.71 Apply()	844
4.19.4.72 ApplyExec()	844
4.19.4.73 ApplyReset()	844
4.19.4.74 TableReset()	844
4.19.4.75 ReWorkT()	844
4.19.4.76 GetIfDollarNum()	845
4.19.4.77 FindVar()	845
4.19.4.78 DolfStatement()	845
4.19.4.79 DoOnePow()	845
4.19.4.80 DoRevert()	846
4.19.4.81 DoSumF1()	846
4.19.4.82 DoSumF2()	847
4.19.4.83 DoTheta()	847
4.19.4.84 EndSort()	847
4.19.4.85 EntVar()	848
4.19.4.86 EpfCon()	848
4.19.4.87 EpfFind()	848
4.19.4.88 EpfGen()	849

4.19.4.89 EqualArg()	849
4.19.4.90 Factorial()	849
4.19.4.91 Bernoulli()	849
4.19.4.92 FactorIn()	849
4.19.4.93 FactorInExpr()	850
4.19.4.94 FindAll()	850
4.19.4.95 FindMulti()	850
4.19.4.96 FindOnce()	850
4.19.4.97 FindOnly()	850
4.19.4.98 FindRest()	850
4.19.4.99 FindrNumber()	851
4.19.4.100 FiniLine()	851
4.19.4.101 FiniTerm()	851
4.19.4.102 FlushOut()	851
4.19.4.103 FunLevel()	852
4.19.4.104 AdjustRenumScratch()	852
4.19.4.105 GarbHand()	852
4.19.4.106 GcdLong()	853
4.19.4.107 LcmLong()	853
4.19.4.108 Generator()	853
4.19.4.109 GetBinom()	854
4.19.4.110 GetFromStore()	854
4.19.4.111 GetLong()	855
4.19.4.112 GetMoreTerms()	855
4.19.4.113 GetMoreFromMem()	855
4.19.4.114 GetOneTerm()	855
4.19.4.115 GetTable()	855
4.19.4.116 GetTerm()	855
4.19.4.117 Glue()	856
4.19.4.118 InFunction()	856
4.19.4.119 IniLine()	857
4.19.4.120 IniVars()	857
4.19.4.121 InsertTerm()	857
4.19.4.122 LongToLine()	858
4.19.4.123 MakeDirty()	858
4.19.4.124 MarkDirty()	858
4.19.4.125 PolyFunDirty()	858
4.19.4.126 PolyFunClean()	859
4.19.4.127 MakeModTable()	859
4.19.4.128 MatchE()	859
4.19.4.129 MatchCy()	859
4.19.4.130 FunMatchCy()	859

4.19.4.131 FunMatchSy()	859
4.19.4.132 MatchArgument()	860
4.19.4.133 MatchFunction()	860
4.19.4.134 MergePatches()	860
4.19.4.135 MesCerr()	861
4.19.4.136 MesComp()	861
4.19.4.137 Modulus()	861
4.19.4.138 MoveDummies()	861
4.19.4.139 MulLong()	862
4.19.4.140 MulRat()	862
4.19.4.141 Mully()	862
4.19.4.142 MultDo()	862
4.19.4.143 NewSort()	862
4.19.4.144 ExtraSymbol()	863
4.19.4.145 Normalize()	863
4.19.4.146 BracketNormalize()	863
4.19.4.147 DropCoefficient()	863
4.19.4.148 DropSymbols()	863
4.19.4.149 PutInside()	863
4.19.4.150 OpenTemp()	864
4.19.4.151 Pack()	864
4.19.4.152 PasteFile()	864
4.19.4.153 Permute()	865
4.19.4.154 PermuteP()	865
4.19.4.155 PolyFunMul()	865
4.19.4.156 PopVariables()	866
4.19.4.157 PrepPoly()	866
4.19.4.158 Processor()	867
4.19.4.159 Product()	868
4.19.4.160 PrtLong()	868
4.19.4.161 PrtTerms()	869
4.19.4.162 PrintDeprecation()	869
4.19.4.163 PrintRunningTime()	869
4.19.4.164 GetRunningTime()	869
4.19.4.165 PutBracket()	869
4.19.4.166 PutIn()	869
4.19.4.167 PutInStore()	870
4.19.4.168 PutOut()	870
4.19.4.169 Quotient()	871
4.19.4.170 RaisPow()	871
4.19.4.171 RaisPowCached()	871
4.19.5 Description	871

4.19.6 Notes	872
4.19.6.1 RaisPowMod()	872
4.19.6.2 NormalModulus()	872
4.19.6.3 MakeInverses()	872
4.19.6.4 GetModInverses()	873
4.19.6.5 GetLongModInverses()	873
4.19.6.6 RatToLine()	873
4.19.6.7 RatioFind()	873
4.19.6.8 RatioGen()	874
4.19.6.9 ReNumber()	874
4.19.6.10 ReadSnum()	874
4.19.6.11 Remain10()	874
4.19.6.12 Remain4()	874
4.19.6.13 ResetScratch()	874
4.19.6.14 ResolveSet()	875
4.19.6.15 RevertScratch()	875
4.19.6.16 ScanFunctions()	875
4.19.6.17 SeekScratch()	875
4.19.6.18 SetEndScratch()	875
4.19.6.19 SetEndHScratch()	875
4.19.6.20 SetFileIndex()	876
4.19.6.21 Sflush()	876
4.19.6.22 Simplify()	876
4.19.6.23 SortWild()	877
4.19.6.24 LocateBase()	877
4.19.6.25 SplitMerge()	877
4.19.6.26 StoreTerm()	878
4.19.6.27 SubPLon()	879
4.19.6.28 Substitute()	879
4.19.6.29 SymFind()	879
4.19.6.30 SymGen()	880
4.19.6.31 Symmetrize()	880
4.19.6.32 FullSymmetrize()	880
4.19.6.33 TakeModulus()	880
4.19.6.34 TakeNormalModulus()	880
4.19.6.35 TalToLine()	881
4.19.6.36 TenVec()	881
4.19.6.37 TenVecFind()	881
4.19.6.38 TermRenumber()	881
4.19.6.39 TestDrop()	882
4.19.6.40 PutInVflags()	882
4.19.6.41 TestMatch()	882

4.19.6.42 TestSub()	883
4.19.6.43 TimeCPU()	883
4.19.6.44 TimeChildren()	884
4.19.6.45 TimeWallClock()	884
4.19.6.46 ToStorage()	884
4.19.6.47 TokenToLine()	884
4.19.6.48 Trace4()	884
4.19.6.49 Trace4Gen()	885
4.19.6.50 Trace4no()	885
4.19.6.51 TraceFind()	885
4.19.6.52 TraceN()	885
4.19.6.53 TraceNgen()	885
4.19.6.54 TraceNno()	885
4.19.6.55 Traces()	886
4.19.6.56 Trick()	886
4.19.6.57 TryDo()	886
4.19.6.58 UnPack()	886
4.19.6.59 VarStore()	886
4.19.6.60 WildFill()	887
4.19.6.61 WriteAll()	887
4.19.6.62 WriteOne()	887
4.19.6.63 WriteArgument()	887
4.19.6.64 WriteExpression()	887
4.19.6.65 WriteInnerTerm()	887
4.19.6.66 WriteLists()	888
4.19.6.67 WriteSetup()	888
4.19.6.68 WriteStats()	888
4.19.6.69 WriteSubTerm()	889
4.19.6.70 WriteTerm()	889
4.19.6.71 execarg()	889
4.19.6.72 execterm()	889
4.19.6.73 SpecialCleanup()	889
4.19.6.74 SetMods()	889
4.19.6.75 UnSetMods()	890
4.19.6.76 DoExecute()	890
4.19.6.77 SetScratch()	890
4.19.6.78 Warning()	890
4.19.6.79 HighWarning()	890
4.19.6.80 SpareTable()	890
4.19.6.81 strDup1()	891
4.19.6.82 Malloc1()	891
4.19.6.83 DoTail()	891

4.19.6.84 OpenInput()	891
4.19.6.85 PutPreVar()	891
4.19.6.86 Error0()	892
4.19.6.87 Error1()	892
4.19.6.88 Error2()	892
4.19.6.89 ReadFromStream()	892
4.19.6.90 GetFromStream()	892
4.19.6.91 LookInStream()	893
4.19.6.92 OpenStream()	893
4.19.6.93 LocateFile()	893
4.19.6.94 CloseStream()	893
4.19.6.95 PositionStream()	893
4.19.6.96 ReverseStatements()	893
4.19.6.97 ProcessOption()	894
4.19.6.98 DoSetups()	894
4.19.6.99 TerminateImpl()	894
4.19.6.100 GetNode()	894
4.19.6.101 AddName()	894
4.19.6.102 GetName()	895
4.19.6.103 GetFunction()	895
4.19.6.104 GetNumber()	895
4.19.6.105 GetLastExprName()	895
4.19.6.106 GetAutoName()	895
4.19.6.107 GetVar()	895
4.19.6.108 MakeDubious()	896
4.19.6.109 GetOName()	896
4.19.6.110 DumpTree()	896
4.19.6.111 DumpNode()	896
4.19.6.112 LinkTree()	896
4.19.6.113 CopyTree()	896
4.19.6.114 CompactifyTree()	897
4.19.6.115 MakeNameTree()	897
4.19.6.116 FreeNameTree()	897
4.19.6.117 AddExpression()	897
4.19.6.118 AddSymbol()	897
4.19.6.119 AddDollar()	897
4.19.6.120 ReplaceDollar()	898
4.19.6.121 DollarRaiseLow()	898
4.19.6.122 AddVector()	898
4.19.6.123 AddDubious()	898
4.19.6.124 AddIndex()	898
4.19.6.125 DoDimension()	898

4.19.6.126 AddFunction()	899
4.19.6.127 CoCommutelnSet()	899
4.19.6.128 CoFunction()	899
4.19.6.129 TestName()	899
4.19.6.130 AddSet()	899
4.19.6.131 DoElements()	899
4.19.6.132 DoTempSet()	900
4.19.6.133 NameConflict()	900
4.19.6.134 OpenFile()	900
4.19.6.135 OpenAddFile()	900
4.19.6.136 ReOpenFile()	900
4.19.6.137 CreateFile()	900
4.19.6.138 CreateLogFile()	900
4.19.6.139 CloseFile()	901
4.19.6.140 CopyFile()	901
4.19.6.141 CreateHandle()	901
4.19.6.142 ReadFile()	901
4.19.6.143 ReadPosFile()	901
4.19.6.144 WriteFileToFile()	902
4.19.6.145 SeekFile()	902
4.19.6.146 TellFile()	902
4.19.6.147 FlushFile()	902
4.19.6.148 GetPosFile()	902
4.19.6.149 SetPosFile()	902
4.19.6.150 SynchFile()	903
4.19.6.151 TruncateFile()	903
4.19.6.152 GetChannel()	903
4.19.6.153 GetAppendChannel()	903
4.19.6.154 CloseChannel()	903
4.19.6.155 inictable()	903
4.19.6.156 findcommand()	903
4.19.6.157 inicbufs()	904
4.19.6.158 StartFiles()	904
4.19.6.159 MakeDate()	904
4.19.6.160 PreProcessor()	904
4.19.6.161 FromList()	904
4.19.6.162 FromOList()	905
4.19.6.163 FromVarList()	905
4.19.6.164 DoubleList()	905
4.19.6.165 DoubleLList()	905
4.19.6.166 DoubleBuffer()	905
4.19.6.167 ExpandBuffer()	905

4.19.6.168 iexp()	906
4.19.6.169 IsLikeVector()	906
4.19.6.170 AreArgsEqual()	906
4.19.6.171 CompareArgs()	906
4.19.6.172 SkipField()	906
4.19.6.173 StrCmp()	906
4.19.6.174 StrlCmp()	907
4.19.6.175 StrHlCmp()	907
4.19.6.176 StrlCont()	907
4.19.6.177 CmpArray()	907
4.19.6.178 ConWord()	907
4.19.6.179 StrLen()	907
4.19.6.180 GetPreVar()	908
4.19.6.181 ToGeneral()	908
4.19.6.182 ToPolyFunGeneral()	908
4.19.6.183 ToFast()	908
4.19.6.184 GetSetupPar()	908
4.19.6.185 RecalcSetups()	908
4.19.6.186 AllocSetups()	909
4.19.6.187 AllocSort()	909
4.19.6.188 AllocSortFileName()	909
4.19.6.189 LoadInputFile()	909
4.19.6.190 GetInput()	909
4.19.6.191 ClearPushback()	909
4.19.6.192 GetChar()	910
4.19.6.193 CharOut()	910
4.19.6.194 UnsetAllowDelay()	910
4.19.6.195 PopPreVars()	910
4.19.6.196 IniModule()	910
4.19.6.197 IniSpecialModule()	910
4.19.6.198 ModuleInstruction()	910
4.19.6.199 PreProInstruction()	911
4.19.6.200 LoadInstruction()	911
4.19.6.201 LoadStatement()	911
4.19.6.202 FindKeyWord()	911
4.19.6.203 FindInKeyWord()	911
4.19.6.204 DoDefine()	911
4.19.6.205 DoRedefine()	912
4.19.6.206 TheDefine()	912
4.19.6.207 TheUndefine()	912
4.19.6.208 ClearMacro()	913
4.19.6.209 DoUndefine()	913

4.19.6.210 DoInclude()	913
4.19.6.211 DoReverseInclude()	913
4.19.6.212 Include()	913
4.19.6.213 DoExternal()	913
4.19.6.214 DoToExternal()	913
4.19.6.215 DoFromExternal()	914
4.19.6.216 DoPrompt()	914
4.19.6.217 DoSetExternal()	914
4.19.6.218 DoSetExternalAttr()	914
4.19.6.219 DoRmExternal()	914
4.19.6.220 DoFactDollar()	914
4.19.6.221 GetDollarNumber()	914
4.19.6.222 DoSetRandom()	915
4.19.6.223 DoOptimize()	915
4.19.6.224 DoClearOptimize()	915
4.19.6.225 DoSkipExtraSymbols()	915
4.19.6.226 DoTimeOutAfter()	915
4.19.6.227 DoMessage()	915
4.19.6.228 DoPreOut()	915
4.19.6.229 DoPreAppend()	916
4.19.6.230 DoPreCreate()	916
4.19.6.231 DoPreAssign()	916
4.19.6.232 DoPreBreak()	916
4.19.6.233 DoPreDefault()	916
4.19.6.234 DoPreSwitch()	916
4.19.6.235 DoPreEndSwitch()	916
4.19.6.236 DoPreCase()	917
4.19.6.237 DoPreShow()	917
4.19.6.238 DoPreExchange()	917
4.19.6.239 DoSystem()	917
4.19.6.240 DoPipe()	917
4.19.6.241 StartPrepro()	917
4.19.6.242 Dolfdef()	917
4.19.6.243 Dolfydef()	918
4.19.6.244 Dolfndef()	918
4.19.6.245 DoElse()	918
4.19.6.246 DoElseif()	918
4.19.6.247 DoEndif()	918
4.19.6.248 DoTerminate()	918
4.19.6.249 Dolf()	918
4.19.6.250 DoCall()	919
4.19.6.251 DoDebug()	919

4.19.6.252 DoContinueDo()	919
4.19.6.253 DoDo()	919
4.19.6.254 DoBreakDo()	919
4.19.6.255 DoEnddo()	919
4.19.6.256 DoEndprocedure()	920
4.19.6.257 DoInside()	920
4.19.6.258 DoEndInside()	920
4.19.6.259 DoProcedure()	920
4.19.6.260 DoPrePrintTimes()	920
4.19.6.261 DoPreWrite()	920
4.19.6.262 DoPreClose()	920
4.19.6.263 DoPreRemove()	921
4.19.6.264 DoPreSortReallocate()	921
4.19.6.265 DoCommentChar()	921
4.19.6.266 DoPrcExtension()	921
4.19.6.267 DoPreReset()	921
4.19.6.268 WriteString()	921
4.19.6.269 WriteUnfinString()	922
4.19.6.270 AddToString()	922
4.19.6.271 PreCalc()	922
4.19.6.272 PreEval()	922
4.19.6.273 NumToStr()	922
4.19.6.274 PreCmp()	922
4.19.6.275 PreEq()	923
4.19.6.276 pParseObject()	923
4.19.6.277 PriefEval()	923
4.19.6.278 EvalPrief()	923
4.19.6.279 PreLoad()	923
4.19.6.280 PreSkip()	924
4.19.6.281 EndOfToken()	924
4.19.6.282 SetSpecialMode()	924
4.19.6.283 MakeGlobal()	924
4.19.6.284 ExecModule()	924
4.19.6.285 ExecStore()	924
4.19.6.286 FullCleanUp()	925
4.19.6.287 DoExecStatement()	925
4.19.6.288 DoPipeStatement()	925
4.19.6.289 DoPolyfun()	925
4.19.6.290 DoPolyratfun()	925
4.19.6.291 CompileStatement()	925
4.19.6.292 ToToken()	925
4.19.6.293 GetDollar()	926

4.19.6.294 MesWork()	926
4.19.6.295 MesCall()	926
4.19.6.296 NumCopy()	926
4.19.6.297 LongCopy()	926
4.19.6.298 LongLongCopy()	926
4.19.6.299 ReserveTempFiles()	927
4.19.6.300 PrintTerm()	927
4.19.6.301 PrintTermC()	927
4.19.6.302 PrintSubTerm()	927
4.19.6.303 PrintWords()	927
4.19.6.304 PrintSeq()	927
4.19.6.305 ExpandTripleDots()	928
4.19.6.306 ComPress()	928
4.19.6.307 StageSort()	928
4.19.6.308 M_free()	929
4.19.6.309 ClearWildcardNames()	929
4.19.6.310 AddWildcardName()	929
4.19.6.311 GetWildcardName()	929
4.19.6.312 Globalize()	929
4.19.6.313 ResetVariables()	929
4.19.6.314 AddToPreTypes()	929
4.19.6.315 MessPreNesting()	930
4.19.6.316 GetStreamPosition()	930
4.19.6.317 DoubleCbuffer()	930
4.19.6.318 AddLHS()	930
4.19.6.319 AddRHS()	931
4.19.6.320 AddNtoL()	931
4.19.6.321 AddNtoC()	932
4.19.6.322 DoubleIfBuffers()	933
4.19.6.323 CreateStream()	933
4.19.6.324 setonoff()	933
4.19.6.325 DoPrint()	933
4.19.6.326 SetExpr()	933
4.19.6.327 AddToCom()	933
4.19.6.328 Add2ComStrings()	934
4.19.6.329 DoSymmetrize()	934
4.19.6.330 DoArgument()	934
4.19.6.331 ArgFactorize()	934
4.19.6.332 TakeArgContent()	934
4.19.6.333 MakeInteger()	935
4.19.6.334 MakeMod()	935
4.19.6.335 FindArg()	936

4.19.6.336 InsertArg()	936
4.19.6.337 CleanupArgCache()	937
4.19.6.338 ArgSymbolMerge()	937
4.19.6.339 ArgDotproductMerge()	937
4.19.6.340 SortWeights()	938
4.19.6.341 DoBrackets()	938
4.19.6.342 DoPutInside()	938
4.19.6.343 CountComp()	938
4.19.6.344 CoAntiBracket()	939
4.19.6.345 CoAntiSymmetrize()	939
4.19.6.346 DoArgPlode()	939
4.19.6.347 CoArgExplode()	939
4.19.6.348 CoArgImplode()	939
4.19.6.349 CoArgument()	939
4.19.6.350 CoInside()	939
4.19.6.351 ExecInside()	940
4.19.6.352 CoInExpression()	940
4.19.6.353 CoInParallel()	940
4.19.6.354 CoNotInParallel()	940
4.19.6.355 DoInParallel()	940
4.19.6.356 CoEndInExpression()	940
4.19.6.357 CoBracket()	940
4.19.6.358 CoPutInside()	941
4.19.6.359 CoAntiPutInside()	941
4.19.6.360 CoMultiBracket()	941
4.19.6.361 CoCFunction()	941
4.19.6.362 CoCTensor()	941
4.19.6.363 CoCollect()	941
4.19.6.364 CoCompress()	941
4.19.6.365 CoContract()	942
4.19.6.366 CoCycleSymmetrize()	942
4.19.6.367 CoDelete()	942
4.19.6.368 CoTableBase()	942
4.19.6.369 CoApply()	942
4.19.6.370 CoDenominators()	942
4.19.6.371 CoDimension()	942
4.19.6.372 CoDiscard()	943
4.19.6.373 CoDisorder()	943
4.19.6.374 CoDrop()	943
4.19.6.375 CoDropCoefficient()	943
4.19.6.376 CoDropSymbols()	943
4.19.6.377 CoElse()	943

4.19.6.378 CoElseIf()	943
4.19.6.379 CoEndArgument()	944
4.19.6.380 CoEndInside()	944
4.19.6.381 CoEndIf()	944
4.19.6.382 CoEndRepeat()	944
4.19.6.383 CoEndTerm()	944
4.19.6.384 CoEndWhile()	944
4.19.6.385 CoExit()	944
4.19.6.386 CoFactArg()	945
4.19.6.387 CoFactDollar()	945
4.19.6.388 CoFactorize()	945
4.19.6.389 CoNFactorize()	945
4.19.6.390 CoUnFactorize()	945
4.19.6.391 CoNUnFactorize()	945
4.19.6.392 DoFactorize()	945
4.19.6.393 CoFill()	946
4.19.6.394 CoFillExpression()	946
4.19.6.395 CoFixIndex()	946
4.19.6.396 CoFormat()	946
4.19.6.397 CoGlobal()	946
4.19.6.398 CoGlobalFactorized()	946
4.19.6.399 CoGoTo()	946
4.19.6.400 Cold()	947
4.19.6.401 ColdNew()	947
4.19.6.402 ColdOld()	947
4.19.6.403 Colf()	947
4.19.6.404 ColfMatch()	947
4.19.6.405 ColfNoMatch()	947
4.19.6.406 ColIndex()	947
4.19.6.407 ColInsideFirst()	948
4.19.6.408 CoKeep()	948
4.19.6.409 CoLabel()	948
4.19.6.410 CoLoad()	948
4.19.6.411 CoLocal()	948
4.19.6.412 CoLocalFactorized()	948
4.19.6.413 CoMany()	948
4.19.6.414 CoMerge()	949
4.19.6.415 CoShuffle()	949
4.19.6.416 CoMetric()	949
4.19.6.417 CoModOption()	949
4.19.6.418 CoModuleOption()	949
4.19.6.419 CoModulus()	949

4.19.6.420 CoMulti()	949
4.19.6.421 CoMultiply()	950
4.19.6.422 CoNFunction()	950
4.19.6.423 CoNPrint()	950
4.19.6.424 CoNTensor()	950
4.19.6.425 CoNWrite()	950
4.19.6.426 CoNoDrop()	950
4.19.6.427 CoNoSkip()	950
4.19.6.428 CoNormalize()	951
4.19.6.429 CoMakeInteger()	951
4.19.6.430 CoFlags()	951
4.19.6.431 CoOff()	951
4.19.6.432 CoOn()	951
4.19.6.433 CoOnce()	951
4.19.6.434 CoOnly()	951
4.19.6.435 CoOptimizeOption()	952
4.19.6.436 CoPolyFun()	952
4.19.6.437 CoPolyRatFun()	952
4.19.6.438 CoPrint()	952
4.19.6.439 CoPrintB()	952
4.19.6.440 CoProperCount()	952
4.19.6.441 CoUnitTrace()	952
4.19.6.442 CoRCycleSymmetrize()	953
4.19.6.443 CoRatio()	953
4.19.6.444 CoRedefine()	953
4.19.6.445 CoRenummer()	953
4.19.6.446 CoRepeat()	953
4.19.6.447 CoSave()	953
4.19.6.448 CoSelect()	953
4.19.6.449 CoSet()	954
4.19.6.450 CoSetExitFlag()	954
4.19.6.451 CoSkip()	954
4.19.6.452 CoProcessBucket()	954
4.19.6.453 CoPushHide()	954
4.19.6.454 CoPopHide()	954
4.19.6.455 CoHide()	954
4.19.6.456 CoIntoHide()	955
4.19.6.457 CoNoIntoHide()	955
4.19.6.458 CoNoHide()	955
4.19.6.459 CoUnHide()	955
4.19.6.460 CoNoUnHide()	955
4.19.6.461 CoSort()	955

4.19.6.462 CoSplitArg()	955
4.19.6.463 CoSplitFirstArg()	956
4.19.6.464 CoSplitLastArg()	956
4.19.6.465 CoSum()	956
4.19.6.466 CoSymbol()	956
4.19.6.467 CoSymmetrize()	956
4.19.6.468 DoTable()	956
4.19.6.469 CoTable()	956
4.19.6.470 CoTerm()	957
4.19.6.471 CoNTable()	957
4.19.6.472 CoCTable()	957
4.19.6.473 EmptyTable()	957
4.19.6.474 CoToTensor()	957
4.19.6.475 CoToVector()	957
4.19.6.476 CoTrace4()	957
4.19.6.477 CoTraceN()	958
4.19.6.478 CoChisholm()	958
4.19.6.479 CoTransform()	958
4.19.6.480 CoClearTable()	958
4.19.6.481 DoChain()	958
4.19.6.482 CoChainin()	958
4.19.6.483 CoChainout()	958
4.19.6.484 CoTryReplace()	959
4.19.6.485 CoVector()	959
4.19.6.486 CoWhile()	959
4.19.6.487 CoWrite()	959
4.19.6.488 CoAuto()	959
4.19.6.489 CoSwitch()	959
4.19.6.490 CoCase()	959
4.19.6.491 CoBreak()	960
4.19.6.492 CoDefault()	960
4.19.6.493 CoEndSwitch()	960
4.19.6.494 CoTBaddto()	960
4.19.6.495 CoTBaudit()	960
4.19.6.496 CoTBCleanup()	960
4.19.6.497 CoTBcreate()	960
4.19.6.498 CoTBenter()	961
4.19.6.499 CoTBhelp()	961
4.19.6.500 CoTBload()	961
4.19.6.501 CoTBoff()	961
4.19.6.502 CoTBon()	961
4.19.6.503 CoTBopen()	961

4.19.6.504 CoTBreplace()	961
4.19.6.505 CoTBuse()	962
4.19.6.506 CoTestUse()	962
4.19.6.507 CoThreadBucket()	962
4.19.6.508 AddComString()	962
4.19.6.509 CompileAlgebra()	962
4.19.6.510 IsIdStatement()	962
4.19.6.511 IsRHS()	963
4.19.6.512 ParenthesesTest()	963
4.19.6.513 tokenize()	963
4.19.6.514 WriteTokens()	963
4.19.6.515 simp1token()	963
4.19.6.516 simpwtoken()	963
4.19.6.517 simp2token()	963
4.19.6.518 simp3atoken()	964
4.19.6.519 simp3btoken()	964
4.19.6.520 simp4token()	964
4.19.6.521 simp5token()	964
4.19.6.522 simp6token()	964
4.19.6.523 SkipAName()	964
4.19.6.524 TestTables()	965
4.19.6.525 GetLabel()	965
4.19.6.526 ColdExpression()	965
4.19.6.527 CoAssign()	965
4.19.6.528 DoExpr()	965
4.19.6.529 CompileSubExpressions()	965
4.19.6.530 CodeGenerator()	966
4.19.6.531 CompleteTerm()	966
4.19.6.532 CodeFactors()	966
4.19.6.533 GenerateFactors()	966
4.19.6.534 InsTree()	966
4.19.6.535 FindTree()	966
4.19.6.536 RedoTree()	967
4.19.6.537 ClearTree()	967
4.19.6.538 CatchDollar()	967
4.19.6.539 AssignDollar()	967
4.19.6.540 WriteDollarToBuffer()	967
4.19.6.541 WriteDollarFactorToBuffer()	967
4.19.6.542 AddToDollarBuffer()	968
4.19.6.543 PutTermInDollar()	968
4.19.6.544 TermAssign()	968
4.19.6.545 WildDollars()	968

4.19.6.546 numcommute()	968
4.19.6.547 FullRenummer()	968
4.19.6.548 Lus()	969
4.19.6.549 FindLus()	969
4.19.6.550 CoReplaceLoop()	969
4.19.6.551 CoFindLoop()	969
4.19.6.552 DoFindLoop()	969
4.19.6.553 CoFunPowers()	969
4.19.6.554 SortTheList()	970
4.19.6.555 MatchIsPossible()	970
4.19.6.556 StudyPattern()	970
4.19.6.557 DolToTensor()	970
4.19.6.558 DolToFunction()	970
4.19.6.559 DolToVector()	970
4.19.6.560 DolToNumber()	970
4.19.6.561 DolToSymbol()	971
4.19.6.562 DolToIndex()	971
4.19.6.563 DolToLong()	971
4.19.6.564 DollarFactorize()	971
4.19.6.565 CoPrintTable()	971
4.19.6.566 CoDeallocateTable()	971
4.19.6.567 CleanDollarFactors()	971
4.19.6.568 TakeDollarContent()	972
4.19.6.569 MakeDollarInteger()	972
4.19.6.570 MakeDollarMod()	973
4.19.6.571 GetDolNum()	973
4.19.6.572 AddPotModdollar()	973
4.19.6.573 Optimize()	974
4.19.7 Description	974
4.19.7.1 ClearOptimize()	975
4.19.8 Description	975
4.19.8.1 TakeLongRoot()	976
4.19.8.2 TakeRatRoot()	976
4.19.8.3 MakeRational()	976
4.19.8.4 MakeLongRational()	976
4.19.8.5 ClearTableTree()	977
4.19.8.6 InsTableTree()	977
4.19.8.7 RedoTableTree()	977
4.19.8.8 FindTableTree()	977
4.19.8.9 finishcbuf()	977
4.19.8.10 clearcbuf()	978
4.19.8.11 CleanUpSort()	978

4.19.8.12 AllocFileHandle()	978
4.19.8.13 DeAllocFileHandle()	978
4.19.8.14 LowerSortLevel()	978
4.19.8.15 PolyRatFunSpecial()	979
4.19.8.16 SimpleSplitMergeRec()	979
4.19.8.17 SimpleSplitMerge()	979
4.19.8.18 BinarySearch()	979
4.19.8.19 InsideDollar()	979
4.19.8.20 DoIToTerms()	979
4.19.8.21 EvalDoLoopArg()	980
4.19.8.22 SetExprCases()	980
4.19.8.23 TestSelect()	980
4.19.8.24 SubsInAll()	981
4.19.8.25 TransferBuffer()	981
4.19.8.26 TakeIDfunction()	981
4.19.8.27 MakeSetupAllocs()	981
4.19.8.28 TryFileSetups()	981
4.19.8.29 ExchangeExpressions()	981
4.19.8.30 ExchangeDollars()	982
4.19.8.31 GetFirstBracket()	982
4.19.8.32 GetFirstTerm()	982
4.19.8.33 GetContent()	982
4.19.8.34 CleanupTerm()	983
4.19.8.35 ContentMerge()	983
4.19.8.36 PriefDollarEval()	983
4.19.8.37 TermsInDollar()	983
4.19.8.38 SizeOfDollar()	983
4.19.8.39 TermsInExpression()	983
4.19.8.40 SizeOfExpression()	983
4.19.8.41 TranslateExpression()	984
4.19.8.42 IsSetMember()	984
4.19.8.43 IsMultipleOf()	984
4.19.8.44 TwoExprCompare()	984
4.19.8.45 UpdatePositions()	984
4.19.8.46 M_print()	984
4.19.8.47 M_check1()	985
4.19.8.48 PrintTime()	985
4.19.8.49 FindBracket()	985
4.19.8.50 PutBracketInIndex()	985
4.19.8.51 ClearBracketIndex()	985
4.19.8.52 OpenBracketIndex()	985
4.19.8.53 DoNoParallel()	985

4.19.8.54 DoParallel()	986
4.19.8.55 DoModSum()	986
4.19.8.56 DoModMax()	986
4.19.8.57 DoModMin()	986
4.19.8.58 DoModLocal()	986
4.19.8.59 DoModDollar()	986
4.19.8.60 DoProcessBucket()	986
4.19.8.61 DoinParallel()	987
4.19.8.62 DonotinParallel()	987
4.19.8.63 FlipTable()	987
4.19.8.64 ChainIn()	987
4.19.8.65 ChainOut()	987
4.19.8.66 ArgumentImplode()	987
4.19.8.67 ArgumentExplode()	988
4.19.8.68 DenToFunction()	988
4.19.8.69 HowMany()	988
4.19.8.70 RemoveDollars()	988
4.19.8.71 CountTerms1()	988
4.19.8.72 TermsInBracket()	988
4.19.8.73 Crash()	989
4.19.8.74 str_dup()	989
4.19.8.75 convertblock()	989
4.19.8.76 convertnamesblock()	989
4.19.8.77 convertiniinfo()	989
4.19.8.78 ReadIndex()	989
4.19.8.79 WriteIndexBlock()	990
4.19.8.80 WriteNamesBlock()	990
4.19.8.81 WriteIndex()	990
4.19.8.82 WriteIniInfo()	990
4.19.8.83 ReadIniInfo()	990
4.19.8.84 AddToIndex()	990
4.19.8.85 GetDbase()	991
4.19.8.86 OpenDbase()	991
4.19.8.87 ReadObject()	991
4.19.8.88 ReadijObject()	991
4.19.8.89 ExistsObject()	991
4.19.8.90 DeleteObject()	991
4.19.8.91 WriteObject()	992
4.19.8.92 AddObject()	992
4.19.8.93 NewDbase()	992
4.19.8.94 FreeTableBase()	992
4.19.8.95 ComposeTableNames()	992

4.19.8.96 PutTableNames()	992
4.19.8.97 AddTableName()	993
4.19.8.98 GetTableName()	993
4.19.8.99 FindTableNumber()	993
4.19.8.100 TryEnvironment()	993
4.19.8.101 CopyExpression()	993
4.19.8.102 set_in()	993
4.19.8.103 set_set()	994
4.19.8.104 set_del()	994
4.19.8.105 set_sub()	994
4.19.8.106 DoPreAddSeparator()	994
4.19.8.107 DoPreRmSeparator()	994
4.19.8.108 openExternalChannel()	994
4.19.8.109 initPresetExternalChannels()	995
4.19.8.110 closeExternalChannel()	995
4.19.8.111 selectExternalChannel()	995
4.19.8.112 getCurrentExternalChannel()	995
4.19.8.113 closeAllExternalChannels()	995
4.19.8.114 defineChannel()	995
4.19.8.115 writeToChannel()	996
4.19.8.116 ReleaseTB()	996
4.19.8.117 SymbolNormalize()	996
4.19.8.118 TestFunFlag()	996
4.19.8.119 CompareSymbols()	996
4.19.8.120 CompareHSymbols()	997
4.19.8.121 NextPrime()	997
4.19.8.122 Moebius()	997
4.19.8.123 wranf()	997
4.19.8.124 iranf()	997
4.19.8.125 iniwranf()	998
4.19.8.126 PreRandom()	998
4.19.8.127 TreatPolyRatFun()	998
4.19.8.128 ReadSaveHeader()	998
4.19.8.129 ReadSaveIndex()	998
4.19.8.130 ReadSaveExpression()	999
4.19.8.131 ReadSaveTerm32()	1000
4.19.8.132 ReadSaveVariables()	1001
4.19.8.133 WriteStoreHeader()	1002
4.19.8.134 InitRecovery()	1002
4.19.8.135 CheckRecoveryFile()	1002
4.19.8.136 DeleteRecoveryFile()	1003
4.19.8.137 RecoveryFilename()	1003

4.19.8.138 DoRecovery()	1003
4.19.8.139 DoCheckpoint()	1004
4.19.8.140 NumberMallocAddMemory()	1005
4.19.8.141 CacheNumberMallocAddMemory()	1005
4.19.8.142 TermMallocAddMemory()	1005
4.19.8.143 ExprStatus()	1005
4.19.8.144 iniTools()	1005
4.19.8.145 TestTerm()	1005
4.19.8.146 RunTransform()	1006
4.19.8.147 RunEncode()	1006
4.19.8.148 RunDecode()	1006
4.19.8.149 RunReplace()	1006
4.19.8.150 RunImplode()	1007
4.19.8.151 RunExplode()	1007
4.19.8.152 TestArgNum()	1007
4.19.8.153 PutArgInScratch()	1007
4.19.8.154 ReadRange()	1007
4.19.8.155 FindRange()	1007
4.19.8.156 RunPermute()	1008
4.19.8.157 RunReverse()	1008
4.19.8.158 RunCycle()	1008
4.19.8.159 RunAddArg()	1008
4.19.8.160 RunMulArg()	1008
4.19.8.161 RunIsLyndon()	1008
4.19.8.162 RunToLyndon()	1009
4.19.8.163 RunDropArg()	1009
4.19.8.164 RunSelectArg()	1009
4.19.8.165 RunDedup()	1009
4.19.8.166 RunZtoHArg()	1009
4.19.8.167 RunHtoZArg()	1009
4.19.8.168 NormPolyTerm()	1010
4.19.8.169 ConvertToPoly()	1010
4.19.8.170 LocalConvertToPoly()	1010
4.19.8.171 ConvertFromPoly()	1010
4.19.8.172 FindSubterm()	1010
4.19.8.173 FindLocalSubterm()	1011
4.19.8.174 PrintSubtermList()	1011
4.19.8.175 PrintExtraSymbol()	1011
4.19.8.176 FindSubexpression()	1011
4.19.8.177 UpdateMaxSize()	1011
4.19.8.178 CoToPolynomial()	1011
4.19.8.179 CoFromPolynomial()	1012

4.19.8.180 CoArgToExtraSymbol()	1012
4.19.8.181 CoExtraSymbols()	1012
4.19.8.182 GetDoParam()	1012
4.19.8.183 GetIfDollarFactor()	1012
4.19.8.184 CoDo()	1012
4.19.8.185 CoEndDo()	1013
4.19.8.186 ExtraSymFun()	1013
4.19.8.187 PruneExtraSymbols()	1013
4.19.8.188 IniFbuffer()	1013
4.19.8.189 GCDfunction()	1013
4.19.8.190 GCDfunction3()	1013
4.19.8.191 ReadPolyRatFun()	1014
4.19.8.192 FromPolyRatFun()	1014
4.19.8.193 PolyDiv()	1014
4.19.8.194 GCDclean()	1014
4.19.8.195 TakeSymbolContent()	1014
4.19.8.196 GCDterms()	1015
4.19.8.197 PutExtraSymbols()	1015
4.19.8.198 TakeExtraSymbols()	1015
4.19.8.199 MultiplyWithTerm()	1015
4.19.8.200 TakeContent()	1015
4.19.8.201 MergeSymbolLists()	1016
4.19.8.202 MergeDotproductLists()	1016
4.19.8.203 CreateExpression()	1016
4.19.8.204 DIVfunction()	1016
4.19.8.205 MULfunc()	1017
4.19.8.206 ConvertArgument()	1017
4.19.8.207 ExpandRat()	1017
4.19.8.208 InvPoly()	1017
4.19.8.209 TestDoLoop()	1017
4.19.8.210 TestEndDoLoop()	1017
4.19.8.211 poly_gcd()	1018
4.19.9 Description	1018
4.19.10 Notes	1018
4.19.10.1 poly_div()	1018
4.19.10.2 poly_rem()	1019
4.19.10.3 poly_inverse()	1019
4.19.10.4 poly_mul()	1019
4.19.10.5 poly_ratfun_add()	1019
4.19.11 Description	1019
4.19.12 Notes	1020
4.19.12.1 poly_ratfun_normalize()	1020

4.19.13 Description	1020
4.19.14 Notes	1021
4.19.14.1 poly_factorize_argument()	1021
4.19.15 Description	1021
4.19.16 Notes	1022
4.19.16.1 poly_factorize_dollar()	1022
4.19.17 Description	1022
4.19.18 Notes	1022
4.19.18.1 poly_factorize_expression()	1023
4.19.19 Description	1023
4.19.20 Notes	1023
4.19.20.1 poly_unfactorize_expression()	1024
4.19.21 Description	1024
4.19.22 Notes	1024
4.19.22.1 poly_free_poly_vars()	1025
4.19.22.2 optimize_print_code()	1025
4.19.23 Description	1025
4.19.23.1 DoPreAdd()	1025
4.19.23.2 DoPreUseDictionary()	1025
4.19.23.3 DoPreCloseDictionary()	1025
4.19.23.4 DoPreOpenDictionary()	1026
4.19.23.5 RemoveDictionary()	1026
4.19.23.6 UnSetDictionary()	1026
4.19.23.7 SetDictionaryOptions()	1026
4.19.23.8 AddToDictionary()	1026
4.19.23.9 AddDictionary()	1026
4.19.23.10 FindDictionary()	1026
4.19.23.11 IsExponentSign()	1027
4.19.23.12 IsMultiplySign()	1027
4.19.23.13 TransformRational()	1027
4.19.23.14 WriteDictionary()	1027
4.19.23.15 ShrinkDictionary()	1027
4.19.23.16 MultiplyToLine()	1027
4.19.23.17 FindSymbol()	1027
4.19.23.18 FindVector()	1028
4.19.23.19 FindIndex()	1028
4.19.23.20 FindFunction()	1028
4.19.23.21 FindFunWithArgs()	1028
4.19.23.22 FindExtraSymbol()	1028
4.19.23.23 DictToBytes()	1028
4.19.23.24 DictFromBytes()	1028
4.19.23.25 CoCreateSpectator()	1029

4.19.23.26 CoToSpectator()	1029
4.19.23.27 CoRemoveSpectator()	1029
4.19.23.28 CoEmptySpectator()	1029
4.19.23.29 CoCopySpectator()	1029
4.19.23.30 PutInSpectator()	1029
4.19.23.31 ClearSpectators()	1029
4.19.23.32 GetFromSpectator()	1030
4.19.23.33 FlushSpectators()	1030
4.19.23.34 ReadFromScratch()	1030
4.19.23.35 AddToScratch()	1030
4.19.23.36 DoPreAppendPath()	1030
4.19.23.37 DoPrePrependPath()	1031
4.19.23.38 DoSwitch()	1031
4.19.23.39 DoEndSwitch()	1031
4.19.23.40 FindCase()	1031
4.19.23.41 SwitchSplitMergeRec()	1031
4.19.23.42 SwitchSplitMerge()	1031
4.19.23.43 DoubleSwitchBuffers()	1032
4.19.23.44 DistrN()	1032
4.19.23.45 DoNamespace()	1032
4.19.23.46 DoEndNamespace()	1032
4.19.23.47 DoUse()	1032
4.19.23.48 SkipName()	1032
4.19.23.49 ConstructName()	1033
4.19.23.50 DoSetUserFlag()	1033
4.19.23.51 DoClearUserFlag()	1033
4.19.23.52 CreateVertex()	1033
4.19.23.53 ReadParticle()	1033
4.19.23.54 CoModel()	1033
4.19.23.55 CoParticle()	1034
4.19.23.56 CoVertex()	1034
4.19.23.57 CoEndModel()	1034
4.19.23.58 LoadModel()	1034
4.19.23.59 CoSetUserFlag()	1034
4.19.23.60 CoClearUserFlag()	1034
4.19.23.61 CoCreateAllLoops()	1034
4.19.23.62 CoCreateAllPaths()	1035
4.19.23.63 CoCreateAll()	1035
4.19.23.64 AllLoops()	1035
4.19.23.65 StartLoops()	1035
4.19.23.66 GenLoops()	1035
4.19.23.67 LoopOutput()	1036

4.19.23.68 AllPaths()	1036
4.19.23.69 GenPaths()	1036
4.19.23.70 PathOutput()	1036
4.20 declare.h	1037
4.21 diagrams.c File Reference	1057
4.21.1 Detailed Description	1057
4.21.2 Function Documentation	1057
4.21.2.1 CoCanonicalize()	1057
4.21.2.2 DoCanonicalize()	1058
4.21.2.3 DoTopologyCanonicalize()	1058
4.21.2.4 DoShattering()	1058
4.22 diagrams.c	1058
4.23 diawrap.cc File Reference	1067
4.23.1 Detailed Description	1068
4.23.2 Macro Definition Documentation	1068
4.23.2.1 MAXPOINTS	1068
4.23.2.2 TOPO_MAXVERT	1068
4.23.3 Function Documentation	1068
4.23.3.1 LoadModel()	1068
4.23.3.2 ConvertParticle()	1068
4.23.3.3 ReConvertParticle()	1068
4.23.3.4 numParticle()	1069
4.23.3.5 fendMG()	1069
4.23.3.6 ProcessTopology()	1069
4.23.3.7 SetDualOpts()	1069
4.23.3.8 GenDiagrams()	1069
4.23.3.9 GenTopologies()	1070
4.24 diawrap.cc	1070
4.25 dict.c File Reference	1083
4.25.1 Detailed Description	1084
4.25.2 Function Documentation	1084
4.25.2.1 TransformRational()	1084
4.25.2.2 IsMultiplySign()	1084
4.25.2.3 IsExponentSign()	1084
4.25.2.4 FindSymbol()	1084
4.25.2.5 FindVector()	1084
4.25.2.6 FindIndex()	1085
4.25.2.7 FindFunction()	1085
4.25.2.8 FindFunWithArgs()	1085
4.25.2.9 FindExtraSymbol()	1085
4.25.2.10 FindDictionary()	1085
4.25.2.11 AddDictionary()	1085

4.25.2.12 AddToDictionary()	1085
4.25.2.13 UseDictionary()	1086
4.25.2.14 SetDictionaryOptions()	1086
4.25.2.15 UnSetDictionary()	1086
4.25.2.16 RemoveDictionary()	1086
4.25.2.17 ShrinkDictionary()	1086
4.25.2.18 DoPreOpenDictionary()	1086
4.25.2.19 DoPreCloseDictionary()	1086
4.25.2.20 DoPreUseDictionary()	1087
4.25.2.21 DoPreAdd()	1087
4.25.2.22 DictToBytes()	1087
4.25.2.23 DictFromBytes()	1087
4.26 dict.c	1087
4.27 dollar.c File Reference	1101
4.27.1 Detailed Description	1102
4.27.2 Macro Definition Documentation	1102
4.27.2.1 STEP2	1102
4.27.3 Function Documentation	1102
4.27.3.1 CatchDollar()	1102
4.27.3.2 AssignDollar()	1102
4.27.3.3 WriteDollarToBuffer()	1103
4.27.3.4 WriteDollarFactorToBuffer()	1103
4.27.3.5 AddToDollarBuffer()	1103
4.27.3.6 TermAssign()	1103
4.27.3.7 PutTermInDollar()	1103
4.27.3.8 WildDollars()	1103
4.27.3.9 DolToTensor()	1104
4.27.3.10 DolToFunction()	1104
4.27.3.11 DolToVector()	1104
4.27.3.12 DolToNumber()	1104
4.27.3.13 DolToSymbol()	1104
4.27.3.14 DolToIndex()	1104
4.27.3.15 DolToTerms()	1104
4.27.3.16 DolToLong()	1105
4.27.3.17 ExecInside()	1105
4.27.3.18 InsideDollar()	1105
4.27.3.19 ExchangeDollars()	1105
4.27.3.20 TermsInDollar()	1105
4.27.3.21 SizeOfDollar()	1105
4.27.3.22 PriefDollarEval()	1106
4.27.3.23 TranslateExpression()	1106
4.27.3.24 IsSetMember()	1106

4.27.3.25 IsMultipleOf()	1106
4.27.3.26 TwoExprCompare()	1106
4.27.3.27 DollarRaiseLow()	1106
4.27.3.28 EvalDoLoopArg()	1107
4.27.3.29 TestDoLoop()	1107
4.27.3.30 TestEndDoLoop()	1107
4.27.3.31 DollarFactorize()	1108
4.27.3.32 CleanDollarFactors()	1108
4.27.3.33 TakeDollarContent()	1108
4.27.3.34 MakeDollarInteger()	1108
4.27.3.35 MakeDollarMod()	1109
4.27.3.36 GetDolNum()	1110
4.27.3.37 AddPotModdollar()	1110
4.28 dollar.c	1111
4.29 evaluate.c File Reference	1156
4.29.1 Detailed Description	1157
4.29.2 Macro Definition Documentation	1157
4.29.2.1 EXTRAPRECISION	1157
4.29.2.2 RND	1157
4.29.2.3 auxr1	1157
4.29.2.4 auxr2	1157
4.29.2.5 auxr3	1157
4.29.2.6 auxr4	1157
4.29.2.7 auxr5	1158
4.29.3 Function Documentation	1158
4.29.3.1 PackFloat()	1158
4.29.3.2 UnpackFloat()	1158
4.29.3.3 RatToFloat()	1158
4.29.3.4 FormtoZ()	1158
4.29.3.5 IntegerToFloat()	1158
4.29.3.6 RatToFloat()	1159
4.29.3.7 SetFloatPrecision()	1159
4.29.3.8 ClearFloat()	1159
4.29.3.9 GetFloatArgument()	1159
4.29.3.10 GetPiArgument()	1159
4.29.3.11 EvaluateFun()	1159
4.29.4 Variable Documentation	1160
4.29.4.1 ln2	1160
4.30 evaluate.c	1160
4.31 execute.c File Reference	1169
4.31.1 Detailed Description	1169
4.31.2 Macro Definition Documentation	1170

4.31.2.1 CURRENTBRACKET	1170
4.31.2.2 BRACKETCURRENTEXPR	1170
4.31.2.3 BRACKETOTHEREXPR	1170
4.31.2.4 NOBRACKETACTIVE	1170
4.31.3 Function Documentation	1170
4.31.3.1 CleanExpr()	1170
4.31.3.2 PopVariables()	1170
4.31.3.3 MakeGlobal()	1170
4.31.3.4 TestDrop()	1171
4.31.3.5 PutInVflags()	1171
4.31.3.6 DoExecute()	1171
4.31.3.7 PutBracket()	1171
4.31.3.8 SpecialCleanup()	1171
4.31.3.9 SetMods()	1171
4.31.3.10 UnSetMods()	1171
4.31.3.11 ExchangeExpressions()	1172
4.31.3.12 GetFirstBracket()	1172
4.31.3.13 GetFirstTerm()	1172
4.31.3.14 GetContent()	1172
4.31.3.15 CleanupTerm()	1173
4.31.3.16 ContentMerge()	1173
4.31.3.17 TermsInExpression()	1173
4.31.3.18 SizeOfExpression()	1173
4.31.3.19 UpdatePositions()	1173
4.31.3.20 CountTerms1()	1173
4.31.3.21 TermsInBracket()	1173
4.32 execute.c	1174
4.33 extcmd.c File Reference	1205
4.33.1 Detailed Description	1206
4.33.2 Function Documentation	1206
4.33.2.1 openExternalChannel()	1206
4.33.2.2 initPresetExternalChannels()	1206
4.33.2.3 closeExternalChannel()	1206
4.33.2.4 selectExternalChannel()	1206
4.33.2.5 getCurrentExternalChannel()	1207
4.33.2.6 closeAllExternalChannels()	1207
4.34 extcmd.c	1207
4.35 factor.c File Reference	1226
4.35.1 Detailed Description	1226
4.35.2 Function Documentation	1227
4.35.2.1 FactorIn()	1227
4.35.2.2 FactorInExpr()	1227

4.36 factor.c	1227
4.37 findpat.c File Reference	1237
4.37.1 Detailed Description	1238
4.37.2 Function Documentation	1238
4.37.2.1 FindOnly()	1238
4.37.2.2 FindOnce()	1238
4.37.2.3 FindMulti()	1238
4.37.2.4 FindRest()	1238
4.38 findpat.c	1239
4.39 flintinterface.cc File Reference	1255
4.39.1 Detailed Description	1255
4.39.2 Macro Definition Documentation	1255
4.39.2.1 UNIVARIATE_DENSITY_THR	1255
4.39.2.2 IFW	1256
4.40 flintinterface.cc	1256
4.41 flintinterface.h File Reference	1282
4.41.1 Detailed Description	1283
4.41.2 Typedef Documentation	1283
4.41.2.1 var_map_t	1283
4.41.3 Function Documentation	1284
4.41.3.1 cleanup()	1284
4.41.3.2 cleanup_master()	1284
4.41.3.3 divmod_mpoly()	1284
4.41.3.4 divmod_poly()	1284
4.41.3.5 factorize_mpoly()	1284
4.41.3.6 factorize_poly()	1285
4.41.3.7 form_sort()	1285
4.41.3.8 from_argument_mpoly()	1285
4.41.3.9 from_argument_poly()	1285
4.41.3.10 fmpz_get_form()	1285
4.41.3.11 fmpz_set_form()	1286
4.41.3.12 gcd_mpoly()	1286
4.41.3.13 gcd_poly()	1286
4.41.3.14 get_variables()	1286
4.41.3.15 inverse_poly()	1286
4.41.3.16 mul_mpoly()	1287
4.41.3.17 mul_poly()	1287
4.41.3.18 ratfun_add_mpoly()	1287
4.41.3.19 ratfun_add_poly()	1287
4.41.3.20 ratfun_normalize_mpoly()	1287
4.41.3.21 ratfun_normalize_poly()	1288
4.41.3.22 ratfun_read_mpoly()	1288

4.41.3.23 ratfun_read_poly()	1288
4.41.3.24 to_argument_mpoly() [1/2]	1288
4.41.3.25 to_argument_mpoly() [2/2]	1288
4.41.3.26 to_argument_poly() [1/2]	1289
4.41.3.27 to_argument_poly() [2/2]	1289
4.41.3.28 simplify_fmpz()	1289
4.41.3.29 simplify_fmpz_poly()	1289
4.41.3.30 fix_sign_fmpz_mpoly_ratfun()	1289
4.41.3.31 fix_sign_fmpz_poly_ratfun()	1290
4.42 flintinterface.h	1290
4.43 flintwrap.cc File Reference	1292
4.43.1 Detailed Description	1293
4.43.2 Function Documentation	1293
4.43.2.1 flint_final_cleanup_thread()	1293
4.43.2.2 flint_final_cleanup_master()	1293
4.43.2.3 flint_div()	1293
4.43.2.4 flint_factorize_argument()	1293
4.43.2.5 flint_factorize_dollar()	1293
4.43.2.6 flint_gcd()	1294
4.43.2.7 flint_inverse()	1294
4.43.2.8 flint_mul()	1294
4.43.2.9 flint_ratfun_add()	1294
4.43.2.10 flint_ratfun_normalize()	1294
4.43.2.11 flint_rem()	1294
4.43.2.12 flint_check_version()	1295
4.44 flintwrap.cc	1295
4.45 float.c File Reference	1299
4.45.1 Detailed Description	1300
4.45.2 Macro Definition Documentation	1300
4.45.2.1 WITHCUTOFF	1300
4.45.2.2 GMPSPREAD	1301
4.45.3 Function Documentation	1301
4.45.3.1 Form_mpf_init()	1301
4.45.3.2 Form_mpf_clear()	1301
4.45.3.3 Form_mpf_set_prec_raw()	1301
4.45.3.4 FormtoZ()	1301
4.45.3.5 ZtoForm()	1301
4.45.3.6 FloatToInteger()	1302
4.45.3.7 IntegerToFloat()	1302
4.45.3.8 FloatToRat()	1302
4.45.3.9 AddFloats()	1302
4.45.3.10 MulFloats()	1302

4.45.3.11 DivFloats()	1302
4.45.3.12 AddRatToFloat()	1303
4.45.3.13 MulRatToFloat()	1303
4.45.3.14 SimpleDelta()	1303
4.45.3.15 SimpleDeltaC()	1303
4.45.3.16 SingleTable()	1303
4.45.3.17 DoubleTable()	1304
4.45.3.18 EndTable()	1304
4.45.3.19 deltaMZV()	1304
4.45.3.20 deltaEuler()	1304
4.45.3.21 deltaEulerC()	1304
4.45.3.22 CalculateMZVhalf()	1305
4.45.3.23 CalculateMZV()	1305
4.45.3.24 CalculateEuler()	1305
4.45.3.25 ExpandMZV()	1305
4.45.3.26 ExpandEuler()	1305
4.45.3.27 PackFloat()	1305
4.45.3.28 UnpackFloat()	1306
4.45.3.29 RatToFloat()	1306
4.45.3.30 Form_mpf_empty()	1306
4.45.3.31 TestFloat()	1306
4.45.3.32 FloatFunToRat()	1306
4.45.3.33 ZeroTable()	1306
4.45.3.34 ReadFloat()	1307
4.45.3.35 CheckFloat()	1307
4.45.3.36 SetFloatPrecision()	1307
4.45.3.37 PrintFloat()	1307
4.45.3.38 SetupMZVTables()	1307
4.45.3.39 SetupMPFTables()	1307
4.45.3.40 ClearMZVTables()	1307
4.45.3.41 CoToFloat()	1308
4.45.3.42 CoToRat()	1308
4.45.3.43 CoStrictRounding()	1308
4.45.3.44 CoChop()	1308
4.45.3.45 ToFloat()	1308
4.45.3.46 ToRat()	1308
4.45.3.47 StrictRounding()	1309
4.45.3.48 Chop()	1309
4.45.3.49 AddWithFloat()	1309
4.45.3.50 MergeWithFloat()	1309
4.45.3.51 EvaluateEuler()	1309
4.45.3.52 CoEvaluate()	1309

4.46 float.c	1310
4.47 form3.h File Reference	1341
4.47.1 Detailed Description	1343
4.47.2 Macro Definition Documentation	1343
4.47.2.1 MAJORVERSION	1343
4.47.2.2 MINORVERSION	1343
4.47.2.3 PRODUCTIONDATE	1343
4.47.2.4 BETAVERSION	1344
4.47.2.5 inline	1344
4.47.2.6 NDEBUG	1344
4.47.2.7 STATIC_ASSERT	1344
4.47.2.8 STATIC_ASSERT__1	1344
4.47.2.9 STATIC_ASSERT__2	1344
4.47.2.10 STATIC_ASSERT__3	1344
4.47.2.11 BITSINWORD	1345
4.47.2.12 BITSINLONG	1345
4.47.2.13 WORD_MIN_VALUE	1345
4.47.2.14 WORD_MAX_VALUE	1345
4.47.2.15 LONG_MIN_VALUE	1345
4.47.2.16 LONG_MAX_VALUE	1345
4.47.2.17 TOPBITONLY	1345
4.47.2.18 TOPLONGBITONLY	1345
4.47.2.19 SPECMASK	1346
4.47.2.20 WILDMASK	1346
4.47.2.21 WORDMASK	1346
4.47.2.22 AWORDMASK	1346
4.47.2.23 FULLMAX	1346
4.47.2.24 MAXPOSITIVE	1346
4.47.2.25 MAXLONG	1346
4.47.2.26 MAXPOSITIVE2	1346
4.47.2.27 MAXPOSITIVE4	1347
4.47.2.28 form_alignof	1347
4.47.2.29 WITHSORTBOTS	1347
4.47.2.30 FILES	1347
4.47.2.31 Uopen	1347
4.47.2.32 Uflush	1347
4.47.2.33 Uclose	1347
4.47.2.34 Uread	1348
4.47.2.35 Uwrite	1348
4.47.2.36 Usetbuf	1348
4.47.2.37 Useek	1348
4.47.2.38 Utell	1348

4.47.2.39 Ugetpos	1348
4.47.2.40 Usetpos	1349
4.47.2.41 Usync	1349
4.47.2.42 Utruncate	1349
4.47.2.43 Ustdout	1349
4.47.2.44 MAX_OPEN_FILES	1349
4.47.2.45 bzero	1349
4.47.2.46 GetPID	1349
4.47.3 Typedef Documentation	1350
4.47.3.1 WORD	1350
4.47.3.2 LONG	1350
4.47.3.3 UWORD	1350
4.47.3.4 ULONG	1350
4.47.3.5 SBYTE	1350
4.47.3.6 UBYTE	1350
4.47.3.7 UINT	1350
4.47.3.8 RLONG	1351
4.47.3.9 MLONG	1351
4.47.3.10 BOOL	1351
4.48 form3.h	1351
4.49 fsizes.h File Reference	1356
4.49.1 Detailed Description	1357
4.49.2 Macro Definition Documentation	1357
4.49.2.1 MAXPRENAMESIZE	1357
4.49.2.2 MAXENAME	1357
4.49.2.3 MAXSAVEFUNCTION	1358
4.49.2.4 MAXPARLEVEL	1358
4.49.2.5 MAXNUMBERSIZE	1358
4.49.2.6 MAXREPEAT	1358
4.49.2.7 NORMSIZE	1358
4.49.2.8 INITNODESIZE	1358
4.49.2.9 INITNAMESIZE	1358
4.49.2.10 NUMFIXED	1358
4.49.2.11 MAXNEST	1359
4.49.2.12 MAXMATCH	1359
4.49.2.13 MAXIF	1359
4.49.2.14 SIZEFACS	1359
4.49.2.15 NUMFACS	1359
4.49.2.16 MAXLOOPS	1359
4.49.2.17 MAXLABELS	1359
4.49.2.18 COMMERCIALSIZE	1359
4.49.2.19 MAXFLAGS	1360

4.49.2.20 COMPRESSBUFFER	1360
4.49.2.21 FORTRANCONTINUATIONLINES	1360
4.49.2.22 MAXLEVELS	1360
4.49.2.23 MAXLHS	1360
4.49.2.24 MAXWILDC	1360
4.49.2.25 NUMTABLEENTRIES	1360
4.49.2.26 COMPILERBUFFER	1360
4.49.2.27 MAXPATCHES	1361
4.49.2.28 MAXFPATCHES	1361
4.49.2.29 SORTIOSIZE	1361
4.49.2.30 SSMALLBUFFER	1361
4.49.2.31 SSMALLOVERFLOW	1361
4.49.2.32 STERMSSMALL	1361
4.49.2.33 SLARGEBUFFER	1361
4.49.2.34 SMAXPATCHES	1361
4.49.2.35 SMAXFPATCHES	1362
4.49.2.36 SSORTIOSIZE	1362
4.49.2.37 SPECTATORSIZE	1362
4.49.2.38 MAXFLEVELS	1362
4.49.2.39 COMPINC	1362
4.49.2.40 MAXNUMSIZE	1362
4.49.2.41 MAXBRACKETBUFFERSIZE	1362
4.49.2.42 SFHSIZE	1362
4.49.2.43 DEFAULTPROCESSBUCKETSIZE	1363
4.49.2.44 SHMWINSIZE	1363
4.49.2.45 TABLEEXTENSION	1363
4.49.2.46 GZIPDEFAULT	1363
4.49.2.47 DEFAULTTHREADS	1363
4.49.2.48 DEFAULTTHREADBUCKETSIZE	1363
4.49.2.49 DEFAULTTHREADLOADBALANCING	1363
4.49.2.50 THREADSCRATCHSIZE	1363
4.49.2.51 THREADSCRATCHOUTSIZE	1364
4.49.2.52 NUMSTORECACHES	1364
4.49.2.53 SIZESTORECACHE	1364
4.49.2.54 INDENTSPACE	1364
4.49.2.55 MULTIINDENTSPACE	1364
4.49.2.56 MAXMULTIBRACKETLEVELS	1364
4.49.2.57 FBUFFERSIZE	1364
4.49.2.58 NPAIR1	1364
4.49.2.59 NPAIR2	1365
4.49.2.60 MAXLINELENGTH	1365
4.49.2.61 MINALLOC	1365

4.49.2.62 JUMPRATIO	1365
4.49.2.63 MAXPARTICLES	1365
4.49.2.64 MAXCOUPLINGS	1365
4.49.2.65 NUMOPTIONS	1365
4.49.2.66 MAXLEGS	1365
4.50 fsizes.h	1366
4.51 ftypes.h File Reference	1368
4.51.1 Detailed Description	1380
4.51.2 Macro Definition Documentation	1381
4.51.2.1 WITHOUTERROR	1381
4.51.2.2 WITHERROR	1381
4.51.2.3 FILESTREAM	1381
4.51.2.4 PREVARSTREAM	1381
4.51.2.5 PREREADSTREAM	1381
4.51.2.6 PIPESTREAM	1381
4.51.2.7 PRECALCSTREAM	1382
4.51.2.8 DOLLARSTREAM	1382
4.51.2.9 PREREADSTREAM2	1382
4.51.2.10 EXTERNALCHANNELSTREAM	1382
4.51.2.11 PREREADSTREAM3	1382
4.51.2.12 REVERSEFILESTREAM	1382
4.51.2.13 INPUTSTREAM	1382
4.51.2.14 ENDOFSTREAM	1382
4.51.2.15 ENDOFINPUT	1383
4.51.2.16 SUBROUTINEFILE	1383
4.51.2.17 PROCEDUREFILE	1383
4.51.2.18 HEADERFILE	1383
4.51.2.19 SETUPFILE	1383
4.51.2.20 TABLEBASEFILE	1383
4.51.2.21 FIRSTMODULE	1383
4.51.2.22 GLOBALMODULE	1383
4.51.2.23 SORTMODULE	1384
4.51.2.24 STOREMODULE	1384
4.51.2.25 CLEARMODULE	1384
4.51.2.26 ENDMODULE	1384
4.51.2.27 POLYFUN	1384
4.51.2.28 NOPARALLEL_DOLLAR	1384
4.51.2.29 NOPARALLEL_RHS	1384
4.51.2.30 NOPARALLEL_CONVPOLY	1384
4.51.2.31 NOPARALLEL_SPECTATOR	1385
4.51.2.32 NOPARALLEL_USER	1385
4.51.2.33 NOPARALLEL_TBLDOLLAR	1385

4.51.2.34 NOPARALLEL_NPROC	1385
4.51.2.35 PARALLELFLAG	1385
4.51.2.36 PRENOACTION	1385
4.51.2.37 PRERAISEAFTER	1385
4.51.2.38 PRELOWERAFTER	1385
4.51.2.39 WITHSEMICOLON	1386
4.51.2.40 WITHOUTSEMICOLON	1386
4.51.2.41 MODULEINSTACK	1386
4.51.2.42 EXECUTINGIF	1386
4.51.2.43 LOOKINGFORELSE	1386
4.51.2.44 LOOKINGFORENDIF	1386
4.51.2.45 NEWSTATEMENT	1386
4.51.2.46 OLDSTATEMENT	1386
4.51.2.47 EXECUTINGPRESWITCH	1387
4.51.2.48 SEARCHINGPRECASE	1387
4.51.2.49 SEARCHINGPREENDSWITCH	1387
4.51.2.50 PREPROONLY	1387
4.51.2.51 DUMPTOCOMPILER	1387
4.51.2.52 DUMPOUTTERMS	1387
4.51.2.53 DUMPINTERMS	1387
4.51.2.54 DUMPTOSORT	1387
4.51.2.55 DUMPTOPARALLEL	1388
4.51.2.56 THREADSDEBUG	1388
4.51.2.57 ERROROUT	1388
4.51.2.58 INPUTOUT	1388
4.51.2.59 STATSOUT	1388
4.51.2.60 EXPRSOUT	1388
4.51.2.61 WRITEOUT	1388
4.51.2.62 EXTERNALCHANNELOUT	1388
4.51.2.63 NUMERICALLOOP	1389
4.51.2.64 LISTEDLOOP	1389
4.51.2.65 ONEEXPRESSION	1389
4.51.2.66 PRETYPENONE	1389
4.51.2.67 PRETYPEIF	1389
4.51.2.68 PRETYPEDO	1389
4.51.2.69 PRETYPEPROCEDURE	1389
4.51.2.70 PRETYPESWITCH	1389
4.51.2.71 PRETYPEINSIDE	1390
4.51.2.72 DECLARATION	1390
4.51.2.73 SPECIFICATION	1390
4.51.2.74 DEFINITION	1390
4.51.2.75 STATEMENT	1390

4.51.2.76 TOOUTPUT	1390
4.51.2.77 ATENDOFMODULE	1390
4.51.2.78 MIXED2	1390
4.51.2.79 MIXED	1391
4.51.2.80 NOAUTO	1391
4.51.2.81 PARTEST	1391
4.51.2.82 WITHAUTO	1391
4.51.2.83 ALLVARIABLES	1391
4.51.2.84 SYMBOLONLY	1391
4.51.2.85 INDEXONLY	1391
4.51.2.86 VECTORONLY	1391
4.51.2.87 FUNCTIONONLY	1392
4.51.2.88 SETONLY	1392
4.51.2.89 EXPRESSIONONLY	1392
4.51.2.90 CDELETE	1392
4.51.2.91 ANYTYPE	1392
4.51.2.92 CSYMBOL	1392
4.51.2.93 CINDEX	1392
4.51.2.94 CVECTOR	1392
4.51.2.95 CFUNCTION	1393
4.51.2.96 CSET	1393
4.51.2.97 CEXPRESSION	1393
4.51.2.98 CDOTPRODUCT	1393
4.51.2.99 CNUMBER	1393
4.51.2.100 CSUBEXP	1393
4.51.2.101 CDELTA	1393
4.51.2.102 CDOLLAR	1393
4.51.2.103 CDUBIOUS	1394
4.51.2.104 CRANGE	1394
4.51.2.105 CMODEL	1394
4.51.2.106 CVECTOR1	1394
4.51.2.107 CDOUBLEDOT	1394
4.51.2.108 TSYMBOL	1394
4.51.2.109 TINDEX	1394
4.51.2.110 TVECTOR	1394
4.51.2.111 TFUNCTION	1395
4.51.2.112 TSET	1395
4.51.2.113 TEXPRESSION	1395
4.51.2.114 TDOTPRODUCT	1395
4.51.2.115 TNUMBER	1395
4.51.2.116 TSUBEXP	1395
4.51.2.117 TDELTA	1395

4.51.2.118 TDOLLAR	1395
4.51.2.119 TDUBIOUS	1396
4.51.2.120 LPARENTHESIS	1396
4.51.2.121 RPARENTHESIS	1396
4.51.2.122 TWILDCARD	1396
4.51.2.123 TWILDARG	1396
4.51.2.124 TDOT	1396
4.51.2.125 LBRACE	1396
4.51.2.126 RBRACE	1396
4.51.2.127 TCOMMA	1397
4.51.2.128 TFUNOPEN	1397
4.51.2.129 TFUNCLOSE	1397
4.51.2.130 TMULTIPLY	1397
4.51.2.131 TDIVIDE	1397
4.51.2.132 TPOWER	1397
4.51.2.133 TPLUS	1397
4.51.2.134 TMINUS	1397
4.51.2.135 TNOT	1398
4.51.2.136 TENDOFIT	1398
4.51.2.137 TSETOPEN	1398
4.51.2.138 TSETCLOSE	1398
4.51.2.139 TGENINDEX	1398
4.51.2.140 TCONJUGATE	1398
4.51.2.141 LRPARENTHESSES	1398
4.51.2.142 TNUMBER1	1398
4.51.2.143 TPOWER1	1399
4.51.2.144 TEMPTY	1399
4.51.2.145 TSETNUM	1399
4.51.2.146 TSGAMMA	1399
4.51.2.147 TSETDOL	1399
4.51.2.148 TFLOAT	1399
4.51.2.149 TYPEISFUN	1399
4.51.2.150 TYPEISSUB	1399
4.51.2.151 TYPEISMYSTERY	1400
4.51.2.152 LHSIDEX	1400
4.51.2.153 LHSIDE	1400
4.51.2.154 RHSIDE	1400
4.51.2.155 FORTRANMODE	1400
4.51.2.156 REDUCEMODE	1400
4.51.2.157 MAPLEMODE	1400
4.51.2.158 MATHEMATICAMODE	1400
4.51.2.159 CMODE	1401

4.51.2.160 VORTTRANMODE	1401
4.51.2.161 PFORTTRANMODE	1401
4.51.2.162 DOUBLEFORTTRANMODE	1401
4.51.2.163 DOUBLEPRECISIONFLAG	1401
4.51.2.164 NODOUBLEMASK	1401
4.51.2.165 QUADRUPLEFORTTRANMODE	1401
4.51.2.166 QUADRUPLEPRECISIONFLAG	1401
4.51.2.167 ALLINTEGERDOUBLE	1402
4.51.2.168 NOQUADMASK	1402
4.51.2.169 NORMALFORMAT	1402
4.51.2.170 NOSPACEFORMAT	1402
4.51.2.171 ISNOTFORTTRAN90	1402
4.51.2.172 ISFORTTRAN90	1402
4.51.2.173 ALSOREVERSE	1402
4.51.2.174 CHISHOLM	1402
4.51.2.175 NOTRICK	1403
4.51.2.176 SORTLOWFIRST	1403
4.51.2.177 SORTHIGHFIRST	1403
4.51.2.178 SORTPOWERFIRST	1403
4.51.2.179 SORTANTIPOWER	1403
4.51.2.180 STATSSPLITMERGE	1403
4.51.2.181 STATSMERGETOFILE	1403
4.51.2.182 STATSPOSTSORT	1403
4.51.2.183 NOCHECKLOGTYPE	1404
4.51.2.184 CHECKLOGTYPE	1404
4.51.2.185 NMIN4SHIFT	1404
4.51.2.186 SYMBOL	1404
4.51.2.187 DOTPRODUCT	1404
4.51.2.188 VECTOR	1404
4.51.2.189 INDEX	1404
4.51.2.190 EXPRESSION	1404
4.51.2.191 SUBEXPRESSION	1405
4.51.2.192 DOLLAREXPRESSION	1405
4.51.2.193 SETSET	1405
4.51.2.194 ARGWILD	1405
4.51.2.195 MINVECTOR	1405
4.51.2.196 SETEXP	1405
4.51.2.197 DOLLAREXP2	1405
4.51.2.198 HAAKJE0	1405
4.51.2.199 FUNCTION	1406
4.51.2.200 TMPPOLYFUN	1406
4.51.2.201 ARGFIELD	1406

4.51.2.202 SNUMBER	1406
4.51.2.203 LNUMBER	1406
4.51.2.204 HAAKJE	1406
4.51.2.205 DELTA	1406
4.51.2.206 EXPONENT	1406
4.51.2.207 DENOMINATOR	1407
4.51.2.208 SETFUNCTION	1407
4.51.2.209 GAMMA	1407
4.51.2.210 GAMMAI	1407
4.51.2.211 GAMMAFIVE	1407
4.51.2.212 GAMMASIX	1407
4.51.2.213 GAMMASEVEN	1407
4.51.2.214 SUMF1	1407
4.51.2.215 SUMF2	1408
4.51.2.216 DUMFUN	1408
4.51.2.217 REPLACEMENT	1408
4.51.2.218 REVERSEFUNCTION	1408
4.51.2.219 DISTRIBUTION	1408
4.51.2.220 DELTA3	1408
4.51.2.221 DUMMYFUN	1408
4.51.2.222 DUMMYTEN	1408
4.51.2.223 LEVICIVITA	1409
4.51.2.224 FACTORIAL	1409
4.51.2.225 INVERSEFACTORIAL	1409
4.51.2.226 BINOMIAL	1409
4.51.2.227 NUMARGSFUN	1409
4.51.2.228 SIGNFUN	1409
4.51.2.229 MODFUNCTION	1409
4.51.2.230 MOD2FUNCTION	1409
4.51.2.231 MINFUNCTION	1410
4.51.2.232 MAXFUNCTION	1410
4.51.2.233 ABSFUNCTION	1410
4.51.2.234 SIGFUNCTION	1410
4.51.2.235 INTFUNCTION	1410
4.51.2.236 THETA	1410
4.51.2.237 THETA2	1410
4.51.2.238 DELTA2	1410
4.51.2.239 DELTAP	1411
4.51.2.240 BERNOULLIFUNCTION	1411
4.51.2.241 COUNTFUNCTION	1411
4.51.2.242 MATCHFUNCTION	1411
4.51.2.243 PATTERNFUNCTION	1411

4.51.2.244 TERMFUNCTION	1411
4.51.2.245 CONJUGATION	1411
4.51.2.246 ROOTFUNCTION	1411
4.51.2.247 TABLEFUNCTION	1412
4.51.2.248 FIRSTBRACKET	1412
4.51.2.249 TERMSINEXPR	1412
4.51.2.250 NUMTERMSFUN	1412
4.51.2.251 GCDFUNCTION	1412
4.51.2.252 DIVFUNCTION	1412
4.51.2.253 REMFUNCTION	1412
4.51.2.254 MAXPOWEROF	1412
4.51.2.255 MINPOWEROF	1413
4.51.2.256 TABLESTUB	1413
4.51.2.257 FACTORIN	1413
4.51.2.258 TERMSINBRACKET	1413
4.51.2.259 WILDARGFUN	1413
4.51.2.260 SQRTFUNCTION	1413
4.51.2.261 LNFUNCTION	1413
4.51.2.262 SINFUNCTION	1413
4.51.2.263 COSFUNCTION	1414
4.51.2.264 TANFUNCTION	1414
4.51.2.265 ASINFUNCTION	1414
4.51.2.266 ACOSFUNCTION	1414
4.51.2.267 ATANFUNCTION	1414
4.51.2.268 ATAN2FUNCTION	1414
4.51.2.269 SINHFUNCTION	1414
4.51.2.270 COSHFUNCTION	1414
4.51.2.271 TANHFUNCTION	1415
4.51.2.272 ASINHFUNCTION	1415
4.51.2.273 ACOSHFUNCTION	1415
4.51.2.274 ATANHFUNCTION	1415
4.51.2.275 LI2FUNCTION	1415
4.51.2.276 LINFUNCTION	1415
4.51.2.277 EXTRASYMFUN	1415
4.51.2.278 RANDOMFUNCTION	1415
4.51.2.279 RANPERM	1416
4.51.2.280 NUMFACTORS	1416
4.51.2.281 FIRSTTERM	1416
4.51.2.282 CONTENTTERM	1416
4.51.2.283 PRIMENUMBER	1416
4.51.2.284 EXTEUCLIDEAN	1416
4.51.2.285 MAKERATIONAL	1416

4.51.2.286 INVERSEFUNCTION	1416
4.51.2.287 IDFUNCTION	1417
4.51.2.288 PUTFIRST	1417
4.51.2.289 PERMUTATIONS	1417
4.51.2.290 PARTITIONS	1417
4.51.2.291 MULFUNCTION	1417
4.51.2.292 MOEBIUS	1417
4.51.2.293 TOPOLOGIES	1417
4.51.2.294 DIAGRAMS	1417
4.51.2.295 TOPO	1418
4.51.2.296 NODEFUNCTION	1418
4.51.2.297 EDGE	1418
4.51.2.298 SIZEOFFUNCTION	1418
4.51.2.299 BLOCK	1418
4.51.2.300 ONEPI	1418
4.51.2.301 PHI	1418
4.51.2.302 FLOATFUN	1418
4.51.2.303 TOFLOAT	1419
4.51.2.304 TORAT	1419
4.51.2.305 MZV	1419
4.51.2.306 EULER	1419
4.51.2.307 MZVHALF	1419
4.51.2.308 AGMFUNCTION	1419
4.51.2.309 GAMMAFUN	1419
4.51.2.310 EXPFUNCTION	1419
4.51.2.311 HPLFUNCTION	1420
4.51.2.312 MPLFUNCTION	1420
4.51.2.313 MAXBUILTINFUNCTION	1420
4.51.2.314 FIRSTUSERFUNCTION	1420
4.51.2.315 ALLFUNCTIONS	1420
4.51.2.316 ALLMZVFUNCTIONS	1420
4.51.2.317 ISYMBOL	1420
4.51.2.318 PISYMBOL	1420
4.51.2.319 COEFFSYMBOL	1421
4.51.2.320 NUMERATORSYMBOL	1421
4.51.2.321 DENOMINATORSYMBOL	1421
4.51.2.322 WILDARGSYMBOL	1421
4.51.2.323 DIMENSIONSYMBOL	1421
4.51.2.324 FACTORSYMBOL	1421
4.51.2.325 SEPARATESYMBOL	1421
4.51.2.326 EESYMBOL	1421
4.51.2.327 EMSYMBOL	1422

4.51.2.328 BUILTINSYMBOLS	1422
4.51.2.329 FIRSTUSERSYMBOL	1422
4.51.2.330 BUILTININDICES	1422
4.51.2.331 BUILTINVECTORS	1422
4.51.2.332 BUILTINDOLLARS	1422
4.51.2.333 WILDARGVECTOR	1422
4.51.2.334 WILDARGINDEX	1422
4.51.2.335 TYPEEXPRESSION	1423
4.51.2.336 TYPEIDNEW	1423
4.51.2.337 TYPEIDOLD	1423
4.51.2.338 TYPEOPERATION	1423
4.51.2.339 TYPEREPEAT	1423
4.51.2.340 TYPEENDREPEAT	1423
4.51.2.341 TYPECOUNT	1423
4.51.2.342 TYPEMULT	1423
4.51.2.343 TYPEGOTO	1424
4.51.2.344 TYPEDISCARD	1424
4.51.2.345 TYPEIF	1424
4.51.2.346 TYPEELSE	1424
4.51.2.347 TYPEELIF	1424
4.51.2.348 TYPEENDIF	1424
4.51.2.349 TYPESUM	1424
4.51.2.350 TYPECHISHOLM	1424
4.51.2.351 TYPEREVERSE	1425
4.51.2.352 TYPEARG	1425
4.51.2.353 TYPENORM	1425
4.51.2.354 TYPENORM2	1425
4.51.2.355 TYPENORM3	1425
4.51.2.356 TYPEEXIT	1425
4.51.2.357 TYPESETEXIT	1425
4.51.2.358 TYPEPRINT	1425
4.51.2.359 TYPEFPRINT	1426
4.51.2.360 TYPEREDEFPRE	1426
4.51.2.361 TYPESPLITARG	1426
4.51.2.362 TYPESPLITARG2	1426
4.51.2.363 TYPEFACTARG	1426
4.51.2.364 TYPEFACTARG2	1426
4.51.2.365 TYPETRY	1426
4.51.2.366 TYPEASSIGN	1426
4.51.2.367 TYPEARENUMBER	1427
4.51.2.368 TYPESUMFIX	1427
4.51.2.369 TYPEFINDLOOP	1427

4.51.2.370 TYPEUNRAVEL	1427
4.51.2.371 TYPEADJUSTBOUNDS	1427
4.51.2.372 TYPEINSIDE	1427
4.51.2.373 TYPETERM	1427
4.51.2.374 TYPESORT	1427
4.51.2.375 TYPEDETCURDUM	1428
4.51.2.376 TYPEINEXPRESSION	1428
4.51.2.377 TYPESPLITFIRSTARG	1428
4.51.2.378 TYPESPLITLASTARG	1428
4.51.2.379 TYPEMERGE	1428
4.51.2.380 TYPETESTUSE	1428
4.51.2.381 TYPEAPPLY	1428
4.51.2.382 TYPEAPPLYRESET	1428
4.51.2.383 TYPECHAININ	1429
4.51.2.384 TYPECHAINOUT	1429
4.51.2.385 TYPENORM4	1429
4.51.2.386 TYPEFACTOR	1429
4.51.2.387 TYPEARGIMPLODE	1429
4.51.2.388 TYPEARGEXPLODE	1429
4.51.2.389 TYPEDENOMINATORS	1429
4.51.2.390 TYPESTUFFLE	1429
4.51.2.391 TYPEDROPCOEFFICIENT	1430
4.51.2.392 TYPETRANSFORM	1430
4.51.2.393 TYPETOPOLYNOMIAL	1430
4.51.2.394 TYPEFROMPOLYNOMIAL	1430
4.51.2.395 TYPEDOLOOP	1430
4.51.2.396 TYPEENDDOLOOP	1430
4.51.2.397 TYPEDROPSYMBOLS	1430
4.51.2.398 TYPEPUTINSIDE	1430
4.51.2.399 TYPETOSPECTATOR	1431
4.51.2.400 TYPEARGTOEXTRASymbol	1431
4.51.2.401 TYPECANONICALIZE	1431
4.51.2.402 TYPESWITCH	1431
4.51.2.403 TYPEENDSWITCH	1431
4.51.2.404 TYPESETUSERFLAG	1431
4.51.2.405 TYPECLEARUSERFLAG	1431
4.51.2.406 TYPEALLLOOPS	1431
4.51.2.407 TYPEALLPATHS	1432
4.51.2.408 TAKETRACE	1432
4.51.2.409 CONTRACT	1432
4.51.2.410 RATIO	1432
4.51.2.411 SYMMETRIZE	1432

4.51.2.412 TENVEC	1432
4.51.2.413 SUMNUM1	1432
4.51.2.414 SUMNUM2	1432
4.51.2.415 WILDDUMMY	1433
4.51.2.416 SYMTONUM	1433
4.51.2.417 SYMTOSYM	1433
4.51.2.418 SYMTOSUB	1433
4.51.2.419 VECTOMIN	1433
4.51.2.420 VECTOVEC	1433
4.51.2.421 VECTOSUB	1433
4.51.2.422 INDTOIND	1433
4.51.2.423 INDTOSUB	1434
4.51.2.424 FUNTOFUN	1434
4.51.2.425 ARGTOARG	1434
4.51.2.426 ARLTOARL	1434
4.51.2.427 EXPTOEXP	1434
4.51.2.428 FROMBRAC	1434
4.51.2.429 FROMSET	1434
4.51.2.430 SETTONUM	1434
4.51.2.431 WILDCARDS	1435
4.51.2.432 SETNUMBER	1435
4.51.2.433 LOADDOLLAR	1435
4.51.2.434 NUMTONUM	1435
4.51.2.435 NUMTOSYM	1435
4.51.2.436 NUMTOIND	1435
4.51.2.437 NUMTOSUB	1435
4.51.2.438 EATTENSOR	1435
4.51.2.439 CLEANFLAG	1436
4.51.2.440 DIRTYFLAG	1436
4.51.2.441 DIRTYSYMFLAG	1436
4.51.2.442 MUSTCLEANPRF	1436
4.51.2.443 SUBTERMUSED1	1436
4.51.2.444 SUBTERMUSED2	1436
4.51.2.445 ALLDIRTY	1436
4.51.2.446 ARGHEAD	1436
4.51.2.447 FUNHEAD	1437
4.51.2.448 SUBEXPSIZE	1437
4.51.2.449 EXPRHEAD	1437
4.51.2.450 TYPEARGHEADSIZE	1437
4.51.2.451 SKIP	1437
4.51.2.452 DROP	1437
4.51.2.453 HIDE	1437

4.51.2.454 UNHIDE	1437
4.51.2.455 INTOHIDE	1438
4.51.2.456 LOCALEXPRESSION	1438
4.51.2.457 SKIPLEXPRESSION	1438
4.51.2.458 DROPEXPRESSION	1438
4.51.2.459 DROPEDEXPRESSION	1438
4.51.2.460 GLOBALEXPRESSION	1438
4.51.2.461 SKIPGEXPRESSION	1438
4.51.2.462 DROPGEXPRESSION	1438
4.51.2.463 STOREDEXPRESSION	1439
4.51.2.464 HIDDENLEXPRESSION	1439
4.51.2.465 HIDDENGEXPRESSION	1439
4.51.2.466 INCEXPRESSION	1439
4.51.2.467 HIDELEXPRESSION	1439
4.51.2.468 HIDEGEXPRESSION	1439
4.51.2.469 DROPHLEXPRESSION	1439
4.51.2.470 DROPHGEXPRESSION	1439
4.51.2.471 UNHIDELEXPRESSION	1440
4.51.2.472 UNHIDEGEXPRESSION	1440
4.51.2.473 INTOHIDELEXPRESSION	1440
4.51.2.474 INTOHIDEGEXPRESSION	1440
4.51.2.475 SPECTATOREXPRESSION	1440
4.51.2.476 DROPSPECTATOREXPRESSION	1440
4.51.2.477 SKIPUNHIDELEXPRESSION	1440
4.51.2.478 SKIPUNHIDEGEXPRESSION	1440
4.51.2.479 PRINTOFF	1441
4.51.2.480 PRINTON	1441
4.51.2.481 PRINTCONTENTS	1441
4.51.2.482 PRINTCONTENT	1441
4.51.2.483 PRINTLFILE	1441
4.51.2.484 PRINTONETERM	1441
4.51.2.485 PRINTONEFUNCTION	1441
4.51.2.486 PRINTALL	1441
4.51.2.487 REGULAREXPRESSION	1442
4.51.2.488 REDEFINEDEXPRESSION	1442
4.51.2.489 NEWLYDEFINEDEXPRESSION	1442
4.51.2.490 VERTEXFUNCTION	1442
4.51.2.491 GENERALFUNCTION	1442
4.51.2.492 TENSORFUNCTION	1442
4.51.2.493 GAMMAFUNCTION	1442
4.51.2.494 POS_	1442
4.51.2.495 POS0_	1443

4.51.2.496 NEG_	1443
4.51.2.497 NEG0_	1443
4.51.2.498 EVEN_	1443
4.51.2.499 ODD_	1443
4.51.2.500 Z_	1443
4.51.2.501 SYMBOL_	1443
4.51.2.502 FIXED_	1443
4.51.2.503 INDEX_	1444
4.51.2.504 Q_	1444
4.51.2.505 DUMMYINDEX_	1444
4.51.2.506 VECTOR_	1444
4.51.2.507 GAMMA1	1444
4.51.2.508 GAMMA5	1444
4.51.2.509 GAMMA6	1444
4.51.2.510 GAMMA7	1444
4.51.2.511 FUNNYVEC	1445
4.51.2.512 FUNNYWILD	1445
4.51.2.513 SUMMEDIND	1445
4.51.2.514 NOINDEX	1445
4.51.2.515 FUNNYDOLLAR	1445
4.51.2.516 EMPTYINDEX	1445
4.51.2.517 MINSPEC	1445
4.51.2.518 USEDFLAG	1445
4.51.2.519 DUMMYFLAG	1446
4.51.2.520 MAINSORT	1446
4.51.2.521 FUNCTIONSORT	1446
4.51.2.522 SUBSORT	1446
4.51.2.523 FLOATMODE	1446
4.51.2.524 RATIONALMODE	1446
4.51.2.525 NUMSPECSETS	1446
4.51.2.526 ISZERO	1446
4.51.2.527 ISUNMODIFIED	1447
4.51.2.528 ISCOMPRESSED	1447
4.51.2.529 ISINRHS	1447
4.51.2.530 ISFACTORIZED	1447
4.51.2.531 TOBEFACTORED	1447
4.51.2.532 TOBEUNFACTORED	1447
4.51.2.533 KEEPZERO	1447
4.51.2.534 VARTYPENONE	1447
4.51.2.535 VARTYPECOMPLEX	1448
4.51.2.536 VARTYPEIMAGINARY	1448
4.51.2.537 VARTYPEROOTOFUNITY	1448

4.51.2.538 VARTYPEMINUS	1448
4.51.2.539 CYCLESYMMETRIC	1448
4.51.2.540 RCYCLESYMMETRIC	1448
4.51.2.541 SYMMETRIC	1448
4.51.2.542 ANTISYMMETRIC	1448
4.51.2.543 REVERSEORDER	1449
4.51.2.544 SUBMULTI	1449
4.51.2.545 SUBONCE	1449
4.51.2.546 SUBONLY	1449
4.51.2.547 SUBMANY	1449
4.51.2.548 SUBVECTOR	1449
4.51.2.549 SUBSELECT	1449
4.51.2.550 SUBALL	1449
4.51.2.551 SUBMASK	1450
4.51.2.552 SUBDISORDER	1450
4.51.2.553 SUBAFTER	1450
4.51.2.554 SUBAFTERNOT	1450
4.51.2.555 IDHEAD	1450
4.51.2.556 DOLLARFLAG	1450
4.51.2.557 NORMALIZEFLAG	1450
4.51.2.558 GIDENT	1450
4.51.2.559 GFIVE	1451
4.51.2.560 GPLUS	1451
4.51.2.561 GMINUS	1451
4.51.2.562 LONGNUMBER	1451
4.51.2.563 MATCH	1451
4.51.2.564 COEFFI	1451
4.51.2.565 SUBEXPR	1451
4.51.2.566 MULTIPLEOF	1451
4.51.2.567 IFDOLLAR	1452
4.51.2.568 IFEXPRESSION	1452
4.51.2.569 IFDOLLAREXTRA	1452
4.51.2.570 IFISFACTORIZED	1452
4.51.2.571 IFOCCURS	1452
4.51.2.572 IFUSERFLAG	1452
4.51.2.573 IFFLOATNUMBER	1452
4.51.2.574 GREATER	1452
4.51.2.575 GREATEREQUAL	1453
4.51.2.576 LESS	1453
4.51.2.577 LESSEQUAL	1453
4.51.2.578 EQUAL	1453
4.51.2.579 NOTEQUAL	1453

4.51.2.580 ORCOND	1453
4.51.2.581 ANDCOND	1453
4.51.2.582 DUMMY	1453
4.51.2.583 SORT	1454
4.51.2.584 STORE	1454
4.51.2.585 END	1454
4.51.2.586 GLOBAL	1454
4.51.2.587 CLEAR	1454
4.51.2.588 VECTBIT	1454
4.51.2.589 DOTPBIT	1454
4.51.2.590 FUNBIT	1454
4.51.2.591 SETBIT	1455
4.51.2.592 EXTRAPARAMETER	1455
4.51.2.593 GENCOMMUTE	1455
4.51.2.594 GENNONCOMMUTE	1455
4.51.2.595 NAMENOTFOUND	1455
4.51.2.596 DOLUNDEFINED	1455
4.51.2.597 DOLNUMBER	1455
4.51.2.598 DOLARGUMENT	1455
4.51.2.599 DOLSUBTERM	1456
4.51.2.600 DOLTERMS	1456
4.51.2.601 DOLWILDARGS	1456
4.51.2.602 DOLINDEX	1456
4.51.2.603 DOLZERO	1456
4.51.2.604 FINDLOOP	1456
4.51.2.605 REPLACELOOP	1456
4.51.2.606 NOFUNPOWERS	1456
4.51.2.607 COMFUNPOWERS	1457
4.51.2.608 ALLFUNPOWERS	1457
4.51.2.609 PROPERORDERFLAG	1457
4.51.2.610 REGULAR	1457
4.51.2.611 FINISH	1457
4.51.2.612 POLYADD	1457
4.51.2.613 POLYSUB	1457
4.51.2.614 POLYMUL	1457
4.51.2.615 POLYDIV	1458
4.51.2.616 POLYREM	1458
4.51.2.617 POLYGCD	1458
4.51.2.618 POLYINTFAC	1458
4.51.2.619 POLYNORM	1458
4.51.2.620 MODNONE	1458
4.51.2.621 MODSUM	1458

4.51.2.622 MODMAX	1458
4.51.2.623 MODMIN	1459
4.51.2.624 MODLOCAL	1459
4.51.2.625 ELEMENTUSED	1459
4.51.2.626 ELEMENTLOADED	1459
4.51.2.627 POSNEG	1459
4.51.2.628 INVERSETABLE	1459
4.51.2.629 COEFFICIENTSONLY	1459
4.51.2.630 ALSOPOWERS	1459
4.51.2.631 ALSOFUNARGS	1460
4.51.2.632 ALSODOLLARS	1460
4.51.2.633 NOINVERSES	1460
4.51.2.634 POSITIVEONLY	1460
4.51.2.635 UNPACK	1460
4.51.2.636 NOUNPACK	1460
4.51.2.637 FROMFUNCTION	1460
4.51.2.638 VARNAMEs	1460
4.51.2.639 AUTONAMES	1461
4.51.2.640 EXPRNAMEs	1461
4.51.2.641 DOLLARNAMEs	1461
4.51.2.642 DUMMYBUFFER	1461
4.51.2.643 ALLARGS	1461
4.51.2.644 NUMARG	1461
4.51.2.645 ARG RANGE	1461
4.51.2.646 MAKEARGS	1461
4.51.2.647 MAXRANGEINDICATOR	1462
4.51.2.648 REPLACEARG	1462
4.51.2.649 ENCODEARG	1462
4.51.2.650 DECODEARG	1462
4.51.2.651 IMplodeARG	1462
4.51.2.652 EXPLODEARG	1462
4.51.2.653 PERMUTEARG	1462
4.51.2.654 REVERSEARG	1462
4.51.2.655 CYCLEARG	1463
4.51.2.656 ISLYNDON	1463
4.51.2.657 ISLYNDONR	1463
4.51.2.658 TOLYNDON	1463
4.51.2.659 TOLYNDONR	1463
4.51.2.660 ADDARG	1463
4.51.2.661 MULTIPLYARG	1463
4.51.2.662 DROPARG	1463
4.51.2.663 SELECTARG	1464

4.51.2.664 DEDUPARG	1464
4.51.2.665 ZTOHARG	1464
4.51.2.666 HTOZARG	1464
4.51.2.667 BASECODE	1464
4.51.2.668 YESLYNDON	1464
4.51.2.669 NOLYNDON	1464
4.51.2.670 TOPOLYNOMIALFLAG	1464
4.51.2.671 FACTARGFLAG	1465
4.51.2.672 OLDFACTARG	1465
4.51.2.673 NEWFACTARG	1465
4.51.2.674 FROMMODULEOPTION	1465
4.51.2.675 FROMPOINTINSTRUCTION	1465
4.51.2.676 EXTRASYMBOL	1465
4.51.2.677 REGULARSYMBOL	1465
4.51.2.678 EXPRESSIONNUMBER	1465
4.51.2.679 O_NONE	1466
4.51.2.680 O_CSE	1466
4.51.2.681 O_CSEGREEDY	1466
4.51.2.682 O_GREEDY	1466
4.51.2.683 O_OCCURRENCE	1466
4.51.2.684 O_MCTS	1466
4.51.2.685 O_SIMULATED_ANNEALING	1466
4.51.2.686 O_FORWARD	1466
4.51.2.687 O_BACKWARD	1467
4.51.2.688 O_FORWARDORBACKWARD	1467
4.51.2.689 O_FORWARDANDBACKWARD	1467
4.51.2.690 OPTHEAD	1467
4.51.2.691 DOALL	1467
4.51.2.692 ONLYFUNCTIONS	1467
4.51.2.693 INUSE	1467
4.51.2.694 COULDCOMMUTE	1467
4.51.2.695 DOESNOTCOMMUTE	1468
4.51.2.696 DICT_NONUMBERS	1468
4.51.2.697 DICT_INTEGERONLY	1468
4.51.2.698 DICT_RATIONALONLY	1468
4.51.2.699 DICT_ALLNUMBERS	1468
4.51.2.700 DICT_NOVARIABLES	1468
4.51.2.701 DICT_DOVARIABLES	1468
4.51.2.702 DICT_NOSPECIALS	1468
4.51.2.703 DICT_DOSPECIALS	1469
4.51.2.704 DICT_NOFUNWITHARGS	1469
4.51.2.705 DICT_DOFUNWITHARGS	1469

4.51.2.706 DICT_NOTINDOLLARS	1469
4.51.2.707 DICT_INDOLLARS	1469
4.51.2.708 DICT_INTEGERNUMBER	1469
4.51.2.709 DICT_RATIONALNUMBER	1469
4.51.2.710 DICT_SYMBOL	1469
4.51.2.711 DICT_VECTOR	1470
4.51.2.712 DICT_INDEX	1470
4.51.2.713 DICT_FUNCTION	1470
4.51.2.714 DICT_FUNCTION_WITH_ARGUMENTS	1470
4.51.2.715 DICT_SPECIALCHARACTER	1470
4.51.2.716 DICT_RANGE	1470
4.51.2.717 READSPECTATORFLAG	1470
4.51.2.718 GLOBALSPECTATORFLAG	1470
4.51.2.719 ORDEREDSET	1471
4.51.2.720 DENSETABLE	1471
4.51.2.721 SPARSETABLE	1471
4.51.2.722 TOPOLOGIESONLY	1471
4.51.2.723 WITHOUTNODES	1471
4.51.2.724 WITHEDGES	1471
4.51.2.725 WITHBLOCKS	1471
4.51.2.726 WITHONEPISETS	1471
4.51.2.727 WITHSYMMETRIZEI	1472
4.51.2.728 WITHSYMMETRIZEF	1472
4.51.2.729 CHECKEXTERN	1472
4.51.2.730 ONEPARTI	1472
4.51.2.731 ONEPARTR	1472
4.51.2.732 ONSHELL	1472
4.51.2.733 OFFSHELL	1472
4.51.2.734 NOSIGMA	1472
4.51.2.735 SIGMA	1473
4.51.2.736 NOSNAIL	1473
4.51.2.737 SNAIL	1473
4.51.2.738 NOTADPOLE	1473
4.51.2.739 TADPOLE	1473
4.51.2.740 SIMPLE	1473
4.51.2.741 NOTSIMPLE	1473
4.51.2.742 BIPART	1473
4.51.2.743 NONBIPART	1474
4.51.2.744 CYCLI	1474
4.51.2.745 CYCLR	1474
4.51.2.746 FLOOP	1474
4.51.2.747 NOTFLOOP	1474

4.51.3 Typedef Documentation	1474
4.51.3.1 PVFUNWP	1474
4.51.3.2 PVFUNV	1474
4.51.3.3 CFUN	1475
4.51.3.4 TFUN	1475
4.51.3.5 TFUN1	1475
4.52 ftypes.h	1475
4.53 function.c File Reference	1488
4.53.1 Detailed Description	1488
4.53.2 Function Documentation	1488
4.53.2.1 MakeDirty()	1488
4.53.2.2 MarkDirty()	1489
4.53.2.3 PolyFunDirty()	1489
4.53.2.4 PolyFunClean()	1489
4.53.2.5 Symmetrize()	1489
4.53.2.6 CompGroup()	1489
4.53.2.7 FullSymmetrize()	1489
4.53.2.8 SymGen()	1490
4.53.2.9 SymFind()	1490
4.53.2.10 ChainIn()	1490
4.53.2.11 ChainOut()	1490
4.53.2.12 MatchFunction()	1490
4.53.2.13 ScanFunctions()	1490
4.54 function.c	1491
4.55 fwin.h File Reference	1513
4.55.1 Detailed Description	1513
4.55.2 Macro Definition Documentation	1514
4.55.2.1 LINEFEED	1514
4.55.2.2 CARRIAGEReturn	1514
4.55.2.3 WITHRETURN	1514
4.55.2.4 WITHSYSTEM	1514
4.55.2.5 P_term	1514
4.55.2.6 SEPARATOR	1514
4.55.2.7 ALTSEPARATOR	1514
4.55.2.8 PATHSEPARATOR	1515
4.55.2.9 WITH_ENV	1515
4.56 fwin.h	1515
4.57 gentopo.cc	1515
4.58 gentopo.h	1534
4.59 grcc.cc	1536
4.60 grcc.h	1663
4.61 grccparam.h	1680

4.62 if.c File Reference	1683
4.62.1 Detailed Description	1683
4.62.2 Function Documentation	1684
4.62.2.1 GetIfDollarNum()	1684
4.62.2.2 FindVar()	1684
4.62.2.3 DofStatement()	1684
4.62.2.4 HowMany()	1684
4.62.2.5 DoubleIfBuffers()	1684
4.62.2.6 DoSwitch()	1684
4.62.2.7 DoEndSwitch()	1685
4.62.2.8 FindCase()	1685
4.62.2.9 DoubleSwitchBuffers()	1685
4.62.2.10 SwitchSplitMergeRec()	1685
4.62.2.11 SwitchSplitMerge()	1685
4.63 if.c	1686
4.64 index.c File Reference	1700
4.64.1 Detailed Description	1700
4.64.2 Function Documentation	1700
4.64.2.1 FindBracket()	1700
4.64.2.2 PutBracketInIndex()	1701
4.64.2.3 ClearBracketIndex()	1701
4.64.2.4 OpenBracketIndex()	1701
4.64.2.5 PutInside()	1701
4.65 index.c	1701
4.66 inivar.h File Reference	1710
4.66.1 Detailed Description	1710
4.66.2 Variable Documentation	1710
4.66.2.1 FG	1710
4.66.2.2 A	1710
4.66.2.3 fixedsets	1711
4.66.2.4 BufferForOutput	1711
4.66.2.5 setupfilename	1711
4.67 inivar.h	1711
4.68 lus.c File Reference	1715
4.68.1 Detailed Description	1715
4.68.2 Function Documentation	1715
4.68.2.1 Lus()	1715
4.68.2.2 FindLus()	1716
4.68.2.3 SortTheList()	1716
4.68.2.4 AllLoops()	1716
4.68.2.5 StartLoops()	1716
4.68.2.6 GenLoops()	1716

4.68.2.7 LoopOutput()	1717
4.68.2.8 AllPaths()	1717
4.68.2.9 GenPaths()	1717
4.68.2.10 PathOutput()	1717
4.68.2.11 AllOnePI()	1717
4.68.2.12 RemoveBridges()	1718
4.68.2.13 TakeOneLine()	1718
4.68.2.14 OutputOnePI()	1718
4.69 lus.c	1718
4.70 mallocprotect.h	1737
4.71 message.c File Reference	1741
4.71.1 Detailed Description	1742
4.71.2 Function Documentation	1742
4.71.2.1 Error0()	1742
4.71.2.2 Error1()	1742
4.71.2.3 Error2()	1742
4.71.2.4 MesWork()	1743
4.71.2.5 MesPrint()	1743
4.71.2.6 Warning()	1743
4.71.2.7 HighWarning()	1743
4.71.2.8 MesCall()	1743
4.71.2.9 MesCerr()	1743
4.71.2.10 MesComp()	1743
4.71.2.11 PrintTerm()	1744
4.71.2.12 PrintTermC()	1744
4.71.2.13 PrintSubTerm()	1744
4.71.2.14 PrintWords()	1744
4.71.2.15 PrintSeq()	1744
4.72 message.c	1745
4.73 minos.c File Reference	1756
4.73.1 Detailed Description	1757
4.73.2 Macro Definition Documentation	1757
4.73.2.1 CFD	1757
4.73.2.2 CTD	1757
4.73.3 Function Documentation	1758
4.73.3.1 minosread()	1758
4.73.3.2 minoswrite()	1758
4.73.3.3 str_dup()	1758
4.73.3.4 convertblock()	1758
4.73.3.5 convertnamesblock()	1758
4.73.3.6 convertiniinfo()	1759
4.73.3.7 LocateBase()	1759

4.73.3.8 ReadIndex()	1759
4.73.3.9 WriteIndexBlock()	1759
4.73.3.10 WriteNamesBlock()	1759
4.73.3.11 WriteIndex()	1759
4.73.3.12 WriteIniInfo()	1760
4.73.3.13 ReadIniInfo()	1760
4.73.3.14 GetDbase()	1760
4.73.3.15 NewDbase()	1760
4.73.3.16 FreeTableBase()	1760
4.73.3.17 ComposeTableNames()	1760
4.73.3.18 OpenDbase()	1760
4.73.3.19 AddTableName()	1761
4.73.3.20 GetTableName()	1761
4.73.3.21 PutTableNames()	1761
4.73.3.22 AddToIndex()	1761
4.73.3.23 AddObject()	1761
4.73.3.24 FindTableNumber()	1761
4.73.3.25 WriteObject()	1762
4.73.3.26 ReadObject()	1762
4.73.3.27 ReadObjObject()	1762
4.73.3.28 ExistsObject()	1762
4.73.3.29 DeleteObject()	1762
4.73.4 Variable Documentation	1763
4.73.4.1 withoutflush	1763
4.74 minos.c	1763
4.75 minos.h File Reference	1780
4.75.1 Detailed Description	1781
4.75.2 Macro Definition Documentation	1781
4.75.2.1 TODISK	1781
4.75.2.2 FROMDISK	1782
4.75.2.3 MDIRTYFLAG	1782
4.75.2.4 MCLEANFLAG	1782
4.75.2.5 INANDOUT	1782
4.75.2.6 INPUTONLY	1782
4.75.2.7 OUTPUTONLY	1782
4.75.2.8 NOCOMPRESS	1782
4.75.3 Function Documentation	1783
4.75.3.1 minosread()	1783
4.75.3.2 minoswrite()	1783
4.75.4 Variable Documentation	1783
4.75.4.1 withoutflush	1783
4.76 minos.h	1783

4.77 model.c File Reference	1785
4.77.1 Detailed Description	1785
4.77.2 Function Documentation	1786
4.77.2.1 CreateVertex()	1786
4.77.2.2 ReadParticle()	1786
4.77.2.3 CoModel()	1786
4.77.2.4 CoParticle()	1786
4.77.2.5 CoVertex()	1786
4.77.2.6 CoEndModel()	1786
4.78 model.c	1787
4.79 module.c File Reference	1792
4.79.1 Detailed Description	1793
4.79.2 Function Documentation	1793
4.79.2.1 ModuleInstruction()	1793
4.79.2.2 CoModuleOption()	1793
4.79.2.3 CoModOption()	1793
4.79.2.4 SetSpecialMode()	1793
4.79.2.5 ExecModule()	1794
4.79.2.6 ExecStore()	1794
4.79.2.7 FullCleanUp()	1794
4.79.2.8 DoPolyfun()	1794
4.79.2.9 DoPolyratfun()	1794
4.79.2.10 DoNoParallel()	1794
4.79.2.11 DoParallel()	1794
4.79.2.12 DoModSum()	1795
4.79.2.13 DoModMax()	1795
4.79.2.14 DoModMin()	1795
4.79.2.15 DoModLocal()	1795
4.79.2.16 DoProcessBucket()	1795
4.79.2.17 DoModDollar()	1795
4.79.2.18 DoinParallel()	1795
4.79.2.19 DonotinParallel()	1796
4.79.2.20 DoExecStatement()	1796
4.79.2.21 DoPipeStatement()	1796
4.80 module.c	1796
4.81 mpi.c File Reference	1805
4.81.1 Detailed Description	1807
4.81.2 Macro Definition Documentation	1807
4.81.2.1 PF_PACKSIZE	1807
4.81.2.2 MPI_ERRCODE_CHECK	1807
4.81.3 Function Documentation	1807
4.81.3.1 PF_RealTime()	1807

4.81.3.2 PF_LibInit()	1809
4.81.3.3 PF_LibTerminate()	1809
4.81.3.4 PF_Probe()	1810
4.81.3.5 PF_IsendSbuf()	1810
4.81.3.6 PF_RecvWbuf()	1810
4.81.3.7 PF_IrecvRbuf()	1811
4.81.3.8 PF_WaitRbuf()	1811
4.81.3.9 PF_Bcast()	1812
4.81.3.10 PF_RawSend()	1812
4.81.3.11 PF_RawRecv()	1813
4.81.3.12 PF_RawProbe()	1813
4.81.3.13 PF_PrintPackBuf()	1813
4.81.3.14 PF_PreparePack()	1814
4.81.3.15 PF_Pack()	1814
4.81.3.16 PF_Unpack()	1815
4.81.3.17 PF_PackString()	1815
4.81.3.18 PF_UnpackString()	1816
4.81.3.19 PF_Send()	1816
4.81.3.20 PF_Receive()	1817
4.81.3.21 PF_Broadcast()	1817
4.81.3.22 PF_PrepareLongSinglePack()	1818
4.81.3.23 PF_LongSinglePack()	1818
4.81.3.24 PF_LongSingleUnpack()	1818
4.81.3.25 PF_LongSingleSend()	1819
4.81.3.26 PF_LongSingleReceive()	1819
4.81.3.27 PF_PrepareLongMultiPack()	1820
4.81.3.28 PF_LongMultiPackImpl()	1820
4.81.3.29 PF_LongMultiUnpackImpl()	1821
4.81.3.30 PF_LongMultiBroadcast()	1822
4.81.4 Variable Documentation	1822
4.81.4.1 PF_maxDollarChunkSize	1822
4.82 mpi.c	1823
4.83 mpidbg.h File Reference	1840
4.83.1 Detailed Description	1841
4.83.2 Macro Definition Documentation	1842
4.83.2.1 MPIDBG_RANK	1842
4.83.2.2 MPIDBG_Out	1842
4.83.2.3 MPIDBG_EXTARG	1842
4.83.2.4 MPI_Send	1842
4.83.2.5 MPI_Recv	1842
4.83.2.6 MPI_Bsend	1842
4.83.2.7 MPI_Ssend	1842

4.83.2.8 MPI_Rsend	1843
4.83.2.9 MPI_Isend	1843
4.83.2.10 MPI_lbsend	1843
4.83.2.11 MPI_issend	1843
4.83.2.12 MPI_Irsend	1843
4.83.2.13 MPI_Irecv	1843
4.83.2.14 MPI_Wait	1843
4.83.2.15 MPI_Test	1844
4.83.2.16 MPI_Waitany	1844
4.83.2.17 MPI_Testany	1844
4.83.2.18 MPI_Waitall	1844
4.83.2.19 MPI_Testall	1844
4.83.2.20 MPI_Waitsome	1844
4.83.2.21 MPI_Testsome	1844
4.83.2.22 MPI_lprobe	1845
4.83.2.23 MPI_Probe	1845
4.83.2.24 MPI_Cancel	1845
4.83.2.25 MPI_Test_cancelled	1845
4.83.2.26 MPI_Barrier	1845
4.83.2.27 MPI_Bcast	1845
4.84 mpidbg.h	1846
4.85 mytime.cc	1854
4.86 mytime.h	1854
4.87 names.c File Reference	1855
4.87.1 Detailed Description	1856
4.87.2 Function Documentation	1857
4.87.2.1 GetNode()	1857
4.87.2.2 AddName()	1857
4.87.2.3 GetName()	1857
4.87.2.4 GetFunction()	1857
4.87.2.5 GetNumber()	1857
4.87.2.6 GetLastExprName()	1858
4.87.2.7 GetOName()	1858
4.87.2.8 GetAutoName()	1858
4.87.2.9 GetVar()	1858
4.87.2.10 EntVar()	1858
4.87.2.11 GetDollar()	1859
4.87.2.12 DumpTree()	1859
4.87.2.13 DumpNode()	1859
4.87.2.14 CompactifyTree()	1859
4.87.2.15 CopyTree()	1859
4.87.2.16 LinkTree()	1859

4.87.2.17 MakeNameTree()	1860
4.87.2.18 FreeNameTree()	1860
4.87.2.19 ClearWildcardNames()	1860
4.87.2.20 AddWildcardName()	1860
4.87.2.21 GetWildcardName()	1860
4.87.2.22 AddSymbol()	1860
4.87.2.23 CoSymbol()	1861
4.87.2.24 AddIndex()	1861
4.87.2.25 CoIndex()	1861
4.87.2.26 DoDimension()	1861
4.87.2.27 CoDimension()	1861
4.87.2.28 AddVector()	1861
4.87.2.29 CoVector()	1862
4.87.2.30 AddFunction()	1862
4.87.2.31 CoCommutInSet()	1862
4.87.2.32 CoFunction()	1862
4.87.2.33 CoNFunction()	1862
4.87.2.34 CoCFunction()	1862
4.87.2.35 CoNTensor()	1863
4.87.2.36 CoCTensor()	1863
4.87.2.37 DoTable()	1863
4.87.2.38 CoTable()	1863
4.87.2.39 CoNTable()	1863
4.87.2.40 CoCTable()	1863
4.87.2.41 EmptyTable()	1863
4.87.2.42 AddSet()	1864
4.87.2.43 DoElements()	1864
4.87.2.44 CoSet()	1864
4.87.2.45 DoTempSet()	1864
4.87.2.46 CoAuto()	1864
4.87.2.47 AddDollar()	1864
4.87.2.48 ReplaceDollar()	1865
4.87.2.49 AddDubious()	1865
4.87.2.50 MakeDubious()	1865
4.87.2.51 NameConflict()	1865
4.87.2.52 AddExpression()	1865
4.87.2.53 GetLabel()	1865
4.87.2.54 ResetVariables()	1866
4.87.2.55 RemoveDollars()	1866
4.87.2.56 Globalize()	1866
4.87.2.57 TestName()	1866
4.88 names.c	1866

4.89 normal.c File Reference	1904
4.89.1 Detailed Description	1905
4.89.2 Macro Definition Documentation	1905
4.89.2.1 MAXNUMBEROFNONCOMTERMS	1905
4.89.3 Function Documentation	1905
4.89.3.1 CompareFunctions()	1905
4.89.3.2 Commute()	1905
4.89.3.3 Normalize()	1905
4.89.3.4 ExtraSymbol()	1906
4.89.3.5 DoTheta()	1906
4.89.3.6 DoDelta()	1906
4.89.3.7 DoRevert()	1906
4.89.3.8 DetCommu()	1906
4.89.3.9 DoesCommu()	1906
4.89.3.10 TreatPolyRatFun()	1907
4.89.3.11 DropCoefficient()	1907
4.89.3.12 DropSymbols()	1907
4.89.3.13 SymbolNormalize()	1907
4.89.3.14 TestFunFlag()	1907
4.89.3.15 BracketNormalize()	1907
4.90 normal.c	1908
4.91 notation.c File Reference	1970
4.91.1 Detailed Description	1971
4.91.2 Function Documentation	1971
4.91.2.1 NormPolyTerm()	1971
4.91.2.2 ConvertToPoly()	1971
4.91.2.3 LocalConvertToPoly()	1971
4.91.2.4 ConvertFromPoly()	1972
4.91.2.5 FindSubterm()	1972
4.91.2.6 FindLocalSubterm()	1972
4.91.2.7 PrintSubtermList()	1972
4.91.2.8 PrintExtraSymbol()	1972
4.91.2.9 FindSubexpression()	1972
4.91.2.10 ExtraSymFun()	1973
4.91.2.11 PruneExtraSymbols()	1973
4.92 notation.c	1973
4.93 opera.c File Reference	1987
4.93.1 Detailed Description	1987
4.93.2 Function Documentation	1988
4.93.2.1 EpfFind()	1988
4.93.2.2 EpfCon()	1988
4.93.2.3 EpfGen()	1988

4.93.2.4 Trick()	1988
4.93.2.5 Trace4no()	1988
4.93.2.6 Trace4()	1989
4.93.2.7 Trace4Gen()	1989
4.93.2.8 TraceNno()	1989
4.93.2.9 TraceN()	1989
4.93.2.10 TraceNgen()	1989
4.93.2.11 Traces()	1990
4.93.2.12 TraceFind()	1990
4.93.2.13 Chisholm()	1990
4.93.2.14 TenVecFind()	1990
4.93.2.15 TenVec()	1990
4.94 opera.c	1991
4.95 optimize.cc File Reference	2019
4.95.1 Detailed Description	2021
4.95.2 Function Documentation	2021
4.95.2.1 print_instr()	2021
4.95.2.2 my_random_shuffle()	2022
4.95.3 Description	2022
4.95.3.1 get_expression()	2022
4.95.4 Description	2022
4.95.4.1 get_brackets()	2023
4.95.5 Description	2023
4.95.5.1 count_operators() [1/2]	2023
4.95.6 Description	2023
4.95.6.1 count_operators() [2/2]	2023
4.95.7 Description	2023
4.95.7.1 occurrence_order()	2024
4.95.8 Description	2024
4.95.8.1 getpower()	2024
4.95.9 Description	2024
4.95.10 Note	2024
4.95.11 Description	2025
4.95.11.1 fixarg()	2025
4.95.12 Description	2025
4.95.12.1 GcdLong_fix_args()	2025
4.95.12.2 DivLong_fix_args()	2025
4.95.12.3 build_Horner_tree()	2026
4.95.13 Description	2026
4.95.13.1 term_compare()	2026
4.95.14 Description	2027
4.95.14.1 Horner_tree()	2027

4.95.15 Description	2027
4.95.15.1 print_tree()	2027
4.95.15.2 hash_range()	2028
4.95.15.3 generate_instructions()	2028
4.95.16 Description	2028
4.95.17 Implementation details	2028
4.95.17.1 count_operators_cse()	2029
4.95.17.2 buildTree()	2029
4.95.17.3 count_operators_cse_topdown()	2029
4.95.17.4 simulated_annealing()	2029
4.95.17.5 find_Horner_MCTS_expand_tree()	2030
4.95.17.6 find_Horner_MCTS()	2030
4.95.18 Description	2030
4.95.18.1 merge_operators()	2030
4.95.19 Description	2031
4.95.20 Implementation details	2031
4.95.20.1 find_optimizations()	2031
4.95.21 Description	2032
4.95.21.1 do_optimization()	2032
4.95.22 Description	2032
4.95.22.1 partial_factorize()	2032
4.95.23 Description	2032
4.95.23.1 optimize_greedy()	2033
4.95.24 Description	2033
4.95.24.1 recycle_variables()	2033
4.95.25 Description	2034
4.95.26 Implementation details	2034
4.95.26.1 optimize_expression_given_Horner()	2034
4.95.27 Description	2034
4.95.27.1 generate_output()	2035
4.95.28 Description	2035
4.95.28.1 generate_expression()	2035
4.95.29 Description	2036
4.95.29.1 optimize_print_code()	2036
4.95.30 Description	2036
4.95.30.1 Optimize()	2037
4.95.31 Description	2037
4.95.31.1 ClearOptimize()	2038
4.95.32 Description	2038
4.95.33 Variable Documentation	2039
4.95.33.1 OPER_ADD	2039
4.95.33.2 OPER_MUL	2039

4.95.33.3 OPER_COMMA	2039
4.95.33.4 optimize_expr	2039
4.95.33.5 optimize_best_Horner_schemes	2039
4.95.33.6 optimize_num_vars	2040
4.95.33.7 optimize_best_num_oper	2040
4.95.33.8 optimize_best_instr	2040
4.95.33.9 optimize_best_vars	2040
4.95.33.10 mcts_factorized	2040
4.95.33.11 mcts_separated	2040
4.95.33.12 mcts_vars	2040
4.95.33.13 mcts_root	2040
4.95.33.14 mcts_expr_score	2041
4.95.33.15 mcts_best_schemes	2041
4.96 optimize.cc	2041
4.97 parallel.c File Reference	2093
4.97.1 Detailed Description	2095
4.97.2 Macro Definition Documentation	2095
4.97.2.1 PRINTFBUF	2095
4.97.2.2 SWAP	2096
4.97.2.3 PACK_LONG	2096
4.97.2.4 UNPACK_LONG	2096
4.97.2.5 CHECK	2096
4.97.2.6 _CHECK	2097
4.97.2.7 __CHECK	2097
4.97.2.8 DBGOUT	2097
4.97.2.9 DBGOUT_NINTERMS	2097
4.97.2.10 PF_STATS_SIZE	2097
4.97.2.11 PF_SNDFILEBUFSIZE	2098
4.97.2.12 recvBuffer	2098
4.97.3 Typedef Documentation	2098
4.97.3.1 NODE	2098
4.97.4 Function Documentation	2098
4.97.4.1 PF_RealTime()	2098
4.97.4.2 PF_LibInit()	2098
4.97.4.3 PF_LibTerminate()	2099
4.97.4.4 PF_Probe()	2099
4.97.4.5 PF_RecvWbuf()	2100
4.97.4.6 PF_IRecvRbuf()	2100
4.97.4.7 PF_WaitRbuf()	2100
4.97.4.8 PF_RawSend()	2101
4.97.4.9 PF_RawRecv()	2101
4.97.4.10 PF_RawProbe()	2102

4.97.4.11 PF_EndSort()	2102
4.97.4.12 PF_Deferred()	2103
4.97.4.13 PF_Processor()	2104
4.97.4.14 PF_Init()	2105
4.97.4.15 PF_Terminate()	2106
4.97.4.16 PF_GetSlaveTimes()	2107
4.97.4.17 PF_BroadcastNumber()	2107
4.97.4.18 PF_BroadcastBuffer()	2108
4.97.4.19 PF_BroadcastString()	2109
4.97.4.20 PF_BroadcastPreDollar()	2109
4.97.4.21 PF_CollectModifiedDollars()	2110
4.97.4.22 PF_BroadcastModifiedDollars()	2111
4.97.4.23 PF_BroadcastRedefinedPreVars()	2112
4.97.4.24 PF_StoreInsideInfo()	2113
4.97.4.25 PF_RestoreInsideInfo()	2113
4.97.4.26 PF_BroadcastCBuf()	2113
4.97.4.27 PF_BroadcastExpFlags()	2114
4.97.4.28 PF_BroadcastExpr()	2114
4.97.4.29 PF_BroadcastRHS()	2115
4.97.4.30 PF_InParallelProcessor()	2115
4.97.4.31 PF_SendFile()	2115
4.97.4.32 PF_RecvFile()	2116
4.97.4.33 PF_MLock()	2117
4.97.4.34 PF_MUnlock()	2117
4.97.4.35 PF_WriteFileToFile()	2117
4.97.4.36 PF_FlushStdOutBuffer()	2118
4.97.4.37 PF_FreeErrorMessageBuffers()	2118
4.97.5 Variable Documentation	2118
4.97.5.1 PF	2118
4.98 parallel.c	2119
4.99 parallel.h File Reference	2167
4.99.1 Detailed Description	2169
4.99.2 Macro Definition Documentation	2169
4.99.2.1 MASTER	2169
4.99.2.2 PF_RESET	2169
4.99.2.3 PF_TIME	2170
4.99.2.4 PF_TERM_MSGTAG	2170
4.99.2.5 PF_ENDSORT_MSGTAG	2170
4.99.2.6 PF_DOLLAR_MSGTAG	2170
4.99.2.7 PF_BUFFER_MSGTAG	2170
4.99.2.8 PF_ENDBUFFER_MSGTAG	2170
4.99.2.9 PF_READY_MSGTAG	2170

4.99.2.10 PF_DATA_MSGTAG	2171
4.99.2.11 PF_EMPTY_MSGTAG	2171
4.99.2.12 PF_STDOUT_MSGTAG	2171
4.99.2.13 PF_LOG_MSGTAG	2171
4.99.2.14 PF_OPT_MCTS_MSGTAG	2171
4.99.2.15 PF_OPT_HORNER_MSGTAG	2171
4.99.2.16 PF_OPT_COLLECT_MSGTAG	2171
4.99.2.17 PF_MISC_MSGTAG	2171
4.99.2.18 GNUC_PREREQ	2172
4.99.2.19 OMPI_SKIP_MPICXX	2172
4.99.2.20 indices	2172
4.99.2.21 PF_ANY_SOURCE	2172
4.99.2.22 PF_ANY_MSGTAG	2172
4.99.2.23 PF_COMM	2172
4.99.2.24 PF_BYTE	2172
4.99.2.25 PF_INT	2173
4.99.2.26 PF_LongMultiPack	2173
4.99.2.27 PF_LongMultiUnpack	2173
4.99.3 Function Documentation	2173
4.99.3.1 PF_IsendSbuf()	2173
4.99.3.2 PF_Bcast()	2174
4.99.3.3 PF_RawSend()	2174
4.99.3.4 PF_RawRecv()	2174
4.99.3.5 PF_PreparePack()	2175
4.99.3.6 PF_Pack()	2175
4.99.3.7 PF_Unpack()	2176
4.99.3.8 PF_PackString()	2176
4.99.3.9 PF_UnpackString()	2177
4.99.3.10 PF_Send()	2177
4.99.3.11 PF_Receive()	2178
4.99.3.12 PF_Broadcast()	2178
4.99.3.13 PF_PrepareLongSinglePack()	2179
4.99.3.14 PF_LongSinglePack()	2179
4.99.3.15 PF_LongSingleUnpack()	2179
4.99.3.16 PF_LongSingleSend()	2180
4.99.3.17 PF_LongSingleReceive()	2180
4.99.3.18 PF_PrepareLongMultiPack()	2181
4.99.3.19 PF_LongMultiPackImpl()	2181
4.99.3.20 PF_LongMultiUnpackImpl()	2182
4.99.3.21 PF_LongMultiBroadcast()	2183
4.99.3.22 PF_EndSort()	2183
4.99.3.23 PF_Deferred()	2184

4.99.3.24 PF_Processor()	2185
4.99.3.25 PF_Init()	2186
4.99.3.26 PF_Terminate()	2187
4.99.3.27 PF_GetSlaveTimes()	2188
4.99.3.28 PF_BroadcastNumber()	2188
4.99.3.29 PF_BroadcastBuffer()	2189
4.99.3.30 PF_BroadcastString()	2190
4.99.3.31 PF_BroadcastPreDollar()	2190
4.99.3.32 PF_CollectModifiedDollars()	2191
4.99.3.33 PF_BroadcastModifiedDollars()	2192
4.99.3.34 PF_BroadcastRedefinedPreVars()	2193
4.99.3.35 PF_BroadcastCBuf()	2194
4.99.3.36 PF_BroadcastExpFlags()	2194
4.99.3.37 PF_StoreInsideInfo()	2195
4.99.3.38 PF_RestoreInsideInfo()	2195
4.99.3.39 PF_BroadcastExpr()	2195
4.99.3.40 PF_BroadcastRHS()	2196
4.99.3.41 PF_InParallelProcessor()	2196
4.99.3.42 PF_SendFile()	2196
4.99.3.43 PF_RecvFile()	2197
4.99.3.44 PF_MLock()	2198
4.99.3.45 PF_MUnlock()	2198
4.99.3.46 PF_WriteFileToFile()	2198
4.99.3.47 PF_FlushStdOutBuffer()	2199
4.99.4 Variable Documentation	2199
4.99.4.1 PF	2199
4.99.4.2 PF_maxDollarChunkSize	2199
4.100 parallel.h	2200
4.101 pattern.c File Reference	2203
4.101.1 Detailed Description	2203
4.101.2 Macro Definition Documentation	2204
4.101.2.1 PutInBuffers	2204
4.101.3 Function Documentation	2204
4.101.3.1 TestMatch()	2204
4.101.3.2 Substitute()	2205
4.101.3.3 FindAll()	2205
4.101.3.4 TestSelect()	2205
4.101.3.5 SubsInAll()	2206
4.101.3.6 TransferBuffer()	2206
4.101.3.7 TakeIDfunction()	2206
4.102 pattern.c	2206
4.103 poly.cc	2233

4.104 poly.h	2266
4.105 polyfact.cc File Reference	2269
4.105.1 Detailed Description	2270
4.105.2 Function Documentation	2270
4.105.2.1 operator<<() [1/2]	2270
4.105.2.2 operator<<() [2/2]	2270
4.106 polyfact.cc	2271
4.107 polyfact.h	2286
4.108 polygcd.cc File Reference	2288
4.108.1 Detailed Description	2288
4.108.2 Function Documentation	2288
4.108.2.1 gcd_heuristic_possible()	2288
4.108.3 Description	2289
4.108.4 Notes	2289
4.108.4.1 gcd_linear_helper()	2289
4.109 polygcd.cc	2289
4.110 polygcd.h	2305
4.111 polywrap.cc File Reference	2307
4.111.1 Detailed Description	2307
4.111.2 Function Documentation	2308
4.111.2.1 poly_determine_modulus()	2308
4.111.3 Description	2308
4.111.4 Notes	2308
4.111.4.1 poly_gcd()	2308
4.111.5 Description	2308
4.111.6 Notes	2309
4.111.6.1 poly_divmod()	2309
4.111.6.2 poly_div()	2309
4.111.6.3 poly_rem()	2309
4.111.6.4 poly_ratfun_read()	2310
4.111.7 Description	2310
4.111.8 Notes	2310
4.111.8.1 poly_sort()	2310
4.111.9 Description	2310
4.111.10 Notes	2311
4.111.10.1 poly_ratfun_add()	2311
4.111.11 Description	2311
4.111.12 Notes	2312
4.111.12.1 poly_ratfun_normalize()	2312
4.111.13 Description	2312
4.111.14 Notes	2313
4.111.14.1 poly_fix_minus_signs()	2313

4.111.14.2 <code>poly_factorize()</code>	2313
4.111.15 Description	2314
4.111.16 Notes	2314
4.111.16.1 <code>poly_factorize_argument()</code>	2314
4.111.17 Description	2314
4.111.18 Notes	2315
4.111.18.1 <code>poly_factorize_dollar()</code>	2315
4.111.19 Description	2315
4.111.20 Notes	2315
4.111.20.1 <code>poly_factorize_expression()</code>	2316
4.111.21 Description	2316
4.111.22 Notes	2316
4.111.22.1 <code>poly_unfactorize_expression()</code>	2317
4.111.23 Description	2317
4.111.24 Notes	2317
4.111.24.1 <code>poly_inverse()</code>	2318
4.111.24.2 <code>poly_mul()</code>	2318
4.111.24.3 <code>poly_free_poly_vars()</code>	2318
4.111.25 Variable Documentation	2318
4.111.25.1 <code>POLYWRAP_DENOMPOWER_INCREASE_FACTOR</code>	2318
4.112 <code>polywrap.cc</code>	2318
4.113 <code>portsignals.h</code> File Reference	2340
4.113.1 Detailed Description	2341
4.113.2 Macro Definition Documentation	2341
4.113.2.1 <code>FATAL_SIG_ERROR</code>	2341
4.113.2.2 <code>NSIG</code>	2341
4.113.2.3 <code>SIGSEGV</code>	2341
4.113.2.4 <code>SIGFPE</code>	2342
4.113.2.5 <code>SIGILL</code>	2342
4.113.2.6 <code>SIGEMT</code>	2342
4.113.2.7 <code>SIGSYS</code>	2342
4.113.2.8 <code>SIGPIPE</code>	2342
4.113.2.9 <code>SIGLOST</code>	2342
4.113.2.10 <code>SIGXCPU</code>	2342
4.113.2.11 <code>SIGXFSZ</code>	2342
4.113.2.12 <code>SIGTERM</code>	2343
4.113.2.13 <code>SIGINT</code>	2343
4.113.2.14 <code>SIGQUIT</code>	2343
4.113.2.15 <code>SIGHUP</code>	2343
4.113.2.16 <code>SIGALRM</code>	2343
4.113.2.17 <code>SIGVTALRM</code>	2343
4.113.2.18 <code>SIGPROF</code>	2343

4.114	portsignals.h	2344
4.115	pre.c File Reference	2345
4.115.1	Detailed Description	2347
4.115.2	Macro Definition Documentation	2348
4.115.2.1	STRINGIFY	2348
4.115.2.2	STRINGIFY__	2348
4.115.2.3	SKIPBUFSIZE	2348
4.115.2.4	KILL	2348
4.115.2.5	KILLALL	2348
4.115.2.6	DAEMON	2348
4.115.2.7	SHELL	2348
4.115.2.8	STDERR	2349
4.115.2.9	TRUE_EXPR	2349
4.115.2.10	FALSE_EXPR	2349
4.115.2.11	NOSHELL	2349
4.115.2.12	TERMINAL	2349
4.115.3	Function Documentation	2349
4.115.3.1	GetInput()	2349
4.115.3.2	ClearPushback()	2349
4.115.3.3	GetChar()	2350
4.115.3.4	CharOut()	2350
4.115.3.5	UnsetAllowDelay()	2350
4.115.3.6	GetPreVar()	2350
4.115.3.7	PutPreVar()	2350
4.115.3.8	PopPreVars()	2351
4.115.3.9	IniModule()	2351
4.115.3.10	IniSpecialModule()	2351
4.115.3.11	PreProcessor()	2351
4.115.3.12	PreProInstruction()	2351
4.115.3.13	LoadInstruction()	2351
4.115.3.14	LoadStatement()	2352
4.115.3.15	ExpandTripleDots()	2352
4.115.3.16	FindKeyWord()	2352
4.115.3.17	FindInKeyWord()	2352
4.115.3.18	TheDefine()	2352
4.115.3.19	DoCommentChar()	2353
4.115.3.20	DoPreAssign()	2353
4.115.3.21	DoDefine()	2353
4.115.3.22	DoRedefine()	2353
4.115.3.23	ClearMacro()	2354
4.115.3.24	TheUndefine()	2354
4.115.3.25	DoUndefine()	2354

4.115.3.26 DoInclude()	2354
4.115.3.27 DoReverseInclude()	2354
4.115.3.28 Include()	2354
4.115.3.29 DoPreExchange()	2354
4.115.3.30 DoCall()	2355
4.115.3.31 DoDebug()	2355
4.115.3.32 DoTerminate()	2355
4.115.3.33 DoContinueDo()	2355
4.115.3.34 DoDo()	2355
4.115.3.35 DoBreakDo()	2355
4.115.3.36 DoElse()	2356
4.115.3.37 DoElseif()	2356
4.115.3.38 DoEnddo()	2356
4.115.3.39 DoEndif()	2356
4.115.3.40 DoEndprocedure()	2356
4.115.3.41 Dolf()	2356
4.115.3.42 Dolfdef()	2356
4.115.3.43 Dolfydef()	2357
4.115.3.44 Dolfndef()	2357
4.115.3.45 DoInside()	2357
4.115.3.46 DoEndInside()	2357
4.115.3.47 DoMessage()	2357
4.115.3.48 DoPipe()	2357
4.115.3.49 DoPrcExtension()	2357
4.115.3.50 DoPreOut()	2358
4.115.3.51 DoPrePrintTimes()	2358
4.115.3.52 DoPreSortReallocate()	2358
4.115.3.53 DoPreAppend()	2358
4.115.3.54 DoPreCreate()	2358
4.115.3.55 DoPreRemove()	2358
4.115.3.56 DoPreClose()	2358
4.115.3.57 DoPreWrite()	2359
4.115.3.58 DoProcedure()	2359
4.115.3.59 DoPreBreak()	2359
4.115.3.60 DoPreCase()	2359
4.115.3.61 DoPreDefault()	2359
4.115.3.62 DoPreEndSwitch()	2359
4.115.3.63 DoPreSwitch()	2359
4.115.3.64 DoPreShow()	2360
4.115.3.65 DoSystem()	2360
4.115.3.66 PreLoad()	2360
4.115.3.67 PreSkip()	2360

4.115.3.68 StartPrepro()	2360
4.115.3.69 EvalPrelf()	2360
4.115.3.70 PrelfEval()	2361
4.115.3.71 PreCmp()	2361
4.115.3.72 PreEq()	2361
4.115.3.73 pParseObject()	2361
4.115.3.74 PreCalc()	2361
4.115.3.75 PreEval()	2362
4.115.3.76 AddToPreTypes()	2362
4.115.3.77 MessPreNesting()	2362
4.115.3.78 DoPreAddSeparator()	2362
4.115.3.79 DoPreRmSeparator()	2362
4.115.3.80 DoExternal()	2362
4.115.3.81 DoPrompt()	2362
4.115.3.82 DoSetExternal()	2363
4.115.3.83 DoSetExternalAttr()	2363
4.115.3.84 DoRmExternal()	2363
4.115.3.85 DoFromExternal()	2363
4.115.3.86 DoToExternal()	2363
4.115.3.87 defineChannel()	2363
4.115.3.88 writeToChannel()	2363
4.115.3.89 DoFactDollar()	2364
4.115.3.90 GetDollarNumber()	2364
4.115.3.91 DoSetRandom()	2364
4.115.3.92 DoOptimize()	2364
4.115.3.93 DoClearOptimize()	2364
4.115.3.94 DoSkipExtraSymbols()	2364
4.115.3.95 DoPreReset()	2364
4.115.3.96 DoPreAppendPath()	2365
4.115.3.97 DoPrePrependPath()	2365
4.115.3.98 DoTimeOutAfter()	2365
4.115.3.99 DoNamespace()	2365
4.115.3.100 DoEndNamespace()	2365
4.115.3.101 SkipName()	2365
4.115.3.102 ConstructName()	2366
4.115.3.103 DoUse()	2366
4.115.3.104 UserFlags()	2366
4.115.3.105 DoClearUserFlag()	2366
4.115.3.106 DoSetUserFlag()	2366
4.116 pre.c	2367
4.117 proces.c File Reference	2457
4.117.1 Detailed Description	2457

4.117.2 Macro Definition Documentation	2458
4.117.2.1 DONE	2458
4.117.3 Function Documentation	2458
4.117.3.1 Processor()	2458
4.117.3.2 TestSub()	2459
4.117.3.3 InFunction()	2459
4.117.3.4 InsertTerm()	2460
4.117.3.5 PasteFile()	2462
4.117.3.6 PasteTerm()	2463
4.117.3.7 FiniTerm()	2463
4.117.3.8 Generator()	2464
4.117.3.9 DoOnePow()	2465
4.117.3.10 Deferred()	2466
4.117.3.11 PrepPoly()	2467
4.117.3.12 PolyFunMul()	2468
4.117.4 Variable Documentation	2469
4.117.4.1 printscratch	2469
4.118 proces.c	2469
4.119 ratio.c File Reference	2534
4.119.1 Detailed Description	2535
4.119.2 Function Documentation	2535
4.119.2.1 RatioFind()	2535
4.119.2.2 RatioGen()	2535
4.119.2.3 BinomGen()	2536
4.119.2.4 DoSumF1()	2536
4.119.2.5 Glue()	2536
4.119.2.6 DoSumF2()	2536
4.119.2.7 GCDfunction()	2536
4.119.2.8 GCDfunction3()	2537
4.119.2.9 PutExtraSymbols()	2537
4.119.2.10 TakeExtraSymbols()	2537
4.119.2.11 MultiplyWithTerm()	2537
4.119.2.12 TakeContent()	2537
4.119.2.13 MergeSymbolLists()	2538
4.119.2.14 MergeDotproductLists()	2538
4.119.2.15 CreateExpression()	2538
4.119.2.16 GCDterms()	2538
4.119.2.17 ReadPolyRatFun()	2539
4.119.2.18 FromPolyRatFun()	2539
4.119.2.19 TakeSymbolContent()	2539
4.119.2.20 GCDclean()	2539
4.119.2.21 PolyDiv()	2540

4.119.2.22 DIVfunction()	2540
4.119.2.23 MULfunc()	2540
4.119.2.24 ConvertArgument()	2540
4.119.2.25 ExpandRat()	2540
4.119.2.26 InvPoly()	2540
4.119.3 Variable Documentation	2541
4.119.3.1 divrem	2541
4.119.3.2 TheErrorMessage	2541
4.120 ratio.c	2541
4.121 reken.c File Reference	2583
4.121.1 Detailed Description	2585
4.121.2 Macro Definition Documentation	2585
4.121.2.1 GCDMAX	2585
4.121.2.2 NEWTRICK	2585
4.121.2.3 COPYLONG	2585
4.121.2.4 WARMUP	2586
4.121.3 Function Documentation	2586
4.121.3.1 Pack()	2586
4.121.3.2 UnPack()	2586
4.121.3.3 Mully()	2586
4.121.3.4 Divvy()	2586
4.121.3.5 AddRat()	2587
4.121.3.6 MulRat()	2587
4.121.3.7 DivRat()	2587
4.121.3.8 Simplify()	2587
4.121.3.9 AccumGCD()	2587
4.121.3.10 TakeRatRoot()	2588
4.121.3.11 AddLong()	2588
4.121.3.12 AddPLon()	2588
4.121.3.13 SubPLon()	2588
4.121.3.14 MulLong()	2588
4.121.3.15 BigLong()	2589
4.121.3.16 DivLong()	2589
4.121.3.17 RaisPow()	2589
4.121.3.18 RaisPowCached()	2589
4.121.4 Description	2589
4.121.5 Notes	2590
4.121.5.1 RaisPowMod()	2590
4.121.5.2 NormalModulus()	2590
4.121.5.3 MakeInverses()	2590
4.121.5.4 GetModInverses()	2591
4.121.5.5 GetLongModInverses()	2591

4.121.5.6 Product()	2591
4.121.5.7 Quotient()	2591
4.121.5.8 Remain10()	2592
4.121.5.9 Remain4()	2592
4.121.5.10 PrtLong()	2592
4.121.5.11 GetLong()	2592
4.121.5.12 GcdLong()	2592
4.121.5.13 GetBinom()	2593
4.121.5.14 LcmLong()	2593
4.121.5.15 TakeLongRoot()	2593
4.121.5.16 MakeRational()	2593
4.121.5.17 MakeLongRational()	2593
4.121.5.18 CompCoef()	2594
4.121.5.19 Modulus()	2594
4.121.5.20 TakeModulus()	2594
4.121.5.21 TakeNormalModulus()	2594
4.121.5.22 MakeModTable()	2594
4.121.5.23 Factorial()	2595
4.121.5.24 Bernoulli()	2595
4.121.5.25 NextPrime()	2595
4.121.5.26 Moebius()	2595
4.121.5.27 iniwranf()	2595
4.121.5.28 wranf()	2596
4.121.5.29 iranf()	2596
4.121.5.30 PreRandom()	2596
4.122 reken.c	2596
4.123 reshuf.c File Reference	2642
4.123.1 Detailed Description	2642
4.123.2 Macro Definition Documentation	2643
4.123.2.1 NEWCODE	2643
4.123.3 Function Documentation	2643
4.123.3.1 ReNumber()	2643
4.123.3.2 FunLevel()	2643
4.123.3.3 DetCurDum()	2643
4.123.3.4 FullRenumber()	2643
4.123.3.5 MoveDummies()	2643
4.123.3.6 AdjustRenumScratch()	2644
4.123.3.7 CountDo()	2644
4.123.3.8 CountFun()	2644
4.123.3.9 DimensionSubterm()	2644
4.123.3.10 DimensionTerm()	2644
4.123.3.11 DimensionExpression()	2644

4.123.3.12 MultDo()	2645
4.123.3.13 TryDo()	2645
4.123.3.14 DoDistrib()	2645
4.123.3.15 EqualArg()	2645
4.123.3.16 DoDelta3()	2645
4.123.3.17 TestPartitions()	2645
4.123.3.18 DoPartitions()	2646
4.123.3.19 DoPermutations()	2646
4.123.3.20 DoShuffle()	2646
4.123.3.21 Shuffle()	2646
4.123.3.22 FinishShuffle()	2646
4.123.3.23 DoStuff()	2646
4.123.3.24 Stuff()	2647
4.123.3.25 FinishStuff()	2647
4.123.3.26 StuffRootAdd()	2647
4.124 reshuf.c	2647
4.125 sch.c File Reference	2683
4.125.1 Detailed Description	2684
4.125.2 Macro Definition Documentation	2684
4.125.2.1 va_dcl	2684
4.125.2.2 va_start	2684
4.125.2.3 va_end	2685
4.125.2.4 va_arg	2685
4.125.3 Typedef Documentation	2685
4.125.3.1 va_list	2685
4.125.4 Function Documentation	2685
4.125.4.1 StrCopy()	2685
4.125.4.2 AddToLine()	2685
4.125.4.3 FiniLine()	2685
4.125.4.4 IniLine()	2686
4.125.4.5 LongToLine()	2686
4.125.4.6 RatToLine()	2686
4.125.4.7 TalToLine()	2686
4.125.4.8 TokenToLine()	2686
4.125.4.9 CodeToLine()	2686
4.125.4.10 MultiplyToLine()	2687
4.125.4.11 AddArrayIndex()	2687
4.125.4.12 PrtTerms()	2687
4.125.4.13 WrtPower()	2687
4.125.4.14 PrintTime()	2687
4.125.4.15 WriteLists()	2687
4.125.4.16 WriteDictionary()	2687

4.125.4.17 WriteArgument()	2688
4.125.4.18 WriteSubTerm()	2688
4.125.4.19 WriteInnerTerm()	2688
4.125.4.20 WriteTerm()	2688
4.125.4.21 WriteExpression()	2688
4.125.4.22 WriteAll()	2688
4.125.4.23 WriteOne()	2689
4.126 sch.c	2689
4.127 setfile.c File Reference	2722
4.127.1 Detailed Description	2723
4.127.2 Macro Definition Documentation	2723
4.127.2.1 NUMERICALVALUE	2723
4.127.2.2 STRINGVALUE	2723
4.127.2.3 PATHVALUE	2724
4.127.2.4 ONOFFVALUE	2724
4.127.2.5 DEFINEVALUE	2724
4.127.2.6 SETBUFSIZE	2724
4.127.3 Function Documentation	2724
4.127.3.1 DoSetups()	2724
4.127.3.2 ProcessOption()	2724
4.127.3.3 GetSetupPar()	2724
4.127.3.4 RecalcSetups()	2725
4.127.3.5 AllocSetups()	2725
4.127.3.6 WriteSetup()	2725
4.127.3.7 AllocSort()	2725
4.127.3.8 AllocSortFileName()	2725
4.127.3.9 AllocFileHandle()	2725
4.127.3.10 DeAllocFileHandle()	2726
4.127.3.11 MakeSetupAllocs()	2726
4.127.3.12 TryFileSetups()	2726
4.127.3.13 TryEnvironment()	2726
4.127.4 Variable Documentation	2726
4.127.4.1 curdirp	2726
4.127.4.2 cursortdirp	2726
4.127.4.3 commentchar	2726
4.127.4.4 dotchar	2727
4.127.4.5 highfirst	2727
4.127.4.6 lowfirst	2727
4.127.4.7 procedureextension	2727
4.127.4.8 setupparameters	2727
4.128 setfile.c	2727
4.129 smart.c File Reference	2742

4.129.1 Detailed Description	2742
4.129.2 Function Documentation	2742
4.129.2.1 StudyPattern()	2742
4.129.2.2 MatchIsPossible()	2743
4.130 smart.c	2743
4.131 sort.c File Reference	2748
4.131.1 Detailed Description	2749
4.131.2 Macro Definition Documentation	2749
4.131.2.1 NEWSPLITMERGE	2749
4.131.2.2 NEWSPLITMERGETIMSORT	2749
4.131.2.3 HUMANSTRLEN	2749
4.131.2.4 HUMANSUFFLEN	2749
4.131.2.5 INSLENGTH	2750
4.131.3 Function Documentation	2750
4.131.3.1 HumanString()	2750
4.131.3.2 WriteStats()	2750
4.131.3.3 NewSort()	2751
4.131.3.4 EndSort()	2751
4.131.3.5 PutIn()	2752
4.131.3.6 Sflush()	2753
4.131.3.7 PutOut()	2753
4.131.3.8 FlushOut()	2754
4.131.3.9 AddCoef()	2755
4.131.3.10 AddPoly()	2755
4.131.3.11 AddArgs()	2756
4.131.3.12 Compare1()	2757
4.131.3.13 CompareSymbols()	2758
4.131.3.14 CompareHSymbols()	2758
4.131.3.15 ComPress()	2758
4.131.3.16 SplitMerge()	2759
4.131.3.17 GarbHand()	2760
4.131.3.18 MergePatches()	2760
4.131.3.19 StoreTerm()	2761
4.131.3.20 StageSort()	2762
4.131.3.21 SortWild()	2762
4.131.3.22 CleanUpSort()	2763
4.131.3.23 LowerSortLevel()	2763
4.131.3.24 PolyRatFunSpecial()	2763
4.131.3.25 SimpleSplitMergeRec()	2763
4.131.3.26 SimpleSplitMerge()	2763
4.131.3.27 BinarySearch()	2764
4.131.4 Variable Documentation	2764

4.131.4.1 toterms	2764
4.131.4.2 humanTermsSuffix	2764
4.131.4.3 humanBytesSuffix	2764
4.132 sort.c	2764
4.133 spectator.c File Reference	2820
4.133.1 Detailed Description	2820
4.133.2 Function Documentation	2820
4.133.2.1 CoCreateSpectator()	2820
4.133.2.2 CoToSpectator()	2821
4.133.2.3 CoRemoveSpectator()	2821
4.133.2.4 CoEmptySpectator()	2821
4.133.2.5 PutInSpectator()	2821
4.133.2.6 FlushSpectators()	2821
4.133.2.7 CoCopySpectator()	2821
4.133.2.8 GetFromSpectator()	2821
4.133.2.9 ClearSpectators()	2822
4.134 spectator.c	2822
4.135 startup.c File Reference	2830
4.135.1 Detailed Description	2831
4.135.2 Macro Definition Documentation	2831
4.135.2.1 STRINGIFY	2831
4.135.2.2 STRINGIFY__	2831
4.135.2.3 FORMNAME	2831
4.135.2.4 VERSIONSTR__	2832
4.135.2.5 VERSIONSTR	2832
4.135.2.6 TAKEPATH	2832
4.135.2.7 DEFAULTFNAMELENGTH	2832
4.135.3 Function Documentation	2832
4.135.3.1 DoTail()	2832
4.135.3.2 OpenInput()	2832
4.135.3.3 ReserveTempFiles()	2832
4.135.3.4 StartVariables()	2833
4.135.3.5 StartMore()	2833
4.135.3.6 IniVars()	2833
4.135.3.7 main()	2833
4.135.3.8 CleanUp()	2834
4.135.3.9 TerminatImpl()	2834
4.135.3.10 PrintDeprecation()	2834
4.135.3.11 PrintRunningTime()	2834
4.135.3.12 GetRunningTime()	2834
4.135.4 Variable Documentation	2835
4.135.4.1 emptystring	2835

4.135.4.2 defaulttempfilename	2835
4.136 startup.c	2835
4.137 store.c File Reference	2860
4.137.1 Detailed Description	2861
4.137.2 Macro Definition Documentation	2861
4.137.2.1 SAVEREVISION	2861
4.137.3 Function Documentation	2861
4.137.3.1 OpenTemp()	2861
4.137.3.2 SeekScratch()	2862
4.137.3.3 SetEndScratch()	2862
4.137.3.4 SetEndHScratch()	2862
4.137.3.5 SetScratch()	2862
4.137.3.6 RevertScratch()	2862
4.137.3.7 ResetScratch()	2862
4.137.3.8 ReadFromScratch()	2863
4.137.3.9 AddToScratch()	2863
4.137.3.10 CoSave()	2863
4.137.3.11 CoLoad()	2863
4.137.3.12 DeleteStore()	2863
4.137.3.13 PutInStore()	2863
4.137.3.14 GetTerm()	2864
4.137.3.15 GetOneTerm()	2864
4.137.3.16 GetMoreTerms()	2864
4.137.3.17 GetMoreFromMem()	2864
4.137.3.18 GetFromStore()	2864
4.137.3.19 DetVars()	2864
4.137.3.20 ToStorage()	2865
4.137.3.21 NextFileIndex()	2865
4.137.3.22 SetFileIndex()	2865
4.137.3.23 VarStore()	2865
4.137.3.24 TermRenummer()	2866
4.137.3.25 FindrNumber()	2866
4.137.3.26 FindInIndex()	2866
4.137.3.27 GetTable()	2867
4.137.3.28 CopyExpression()	2867
4.137.3.29 WriteStoreHeader()	2867
4.137.3.30 ReadSaveHeader()	2867
4.137.3.31 ReadSaveIndex()	2868
4.137.3.32 ReadSaveVariables()	2868
4.137.3.33 ReadSaveTerm32()	2869
4.137.3.34 ReadSaveExpression()	2870
4.138 store.c	2871

4.139 structs.h File Reference	2929
4.139.1 Detailed Description	2932
4.139.2 Macro Definition Documentation	2932
4.139.2.1 INFILEINDEX	2932
4.139.2.2 EMPTYINDEX	2932
4.139.2.3 PHEAD	2932
4.139.2.4 PHEAD0	2932
4.139.2.5 BHEAD	2933
4.139.2.6 BHEAD0	2933
4.139.3 Typedef Documentation	2933
4.139.3.1 INDEXENTRY	2933
4.139.3.2 FILEINDEX	2933
4.139.3.3 VARRENUM	2933
4.139.3.4 RENUMBER	2933
4.139.3.5 NAMENODE	2934
4.139.3.6 NAMETREE	2934
4.139.3.7 COMPTREE	2934
4.139.3.8 TABLES	2934
4.139.3.9 FUNCTIONS	2934
4.139.3.10 FILEHANDLE	2934
4.139.3.11 STREAM	2935
4.139.3.12 TRACES	2935
4.139.3.13 TRACEN	2935
4.139.3.14 PREVAR	2935
4.139.3.15 DOLOOP	2935
4.139.3.16 set_of_char	2935
4.139.3.17 one_byte	2936
4.139.3.18 FINISHUFFLE	2936
4.139.3.19 DO_UFFLE	2936
4.139.3.20 COMPAREDUMMY	2936
4.139.3.21 CBUF	2936
4.139.3.22 CHANNEL	2936
4.139.3.23 NESTING	2936
4.139.3.24 STORECACHE	2937
4.139.3.25 PERM	2937
4.139.3.26 PERMP	2937
4.139.3.27 DISTRIBUTE	2937
4.139.3.28 PARTI	2937
4.139.3.29 SORTING	2937
4.139.3.30 ALLGLOBALS	2937
4.139.3.31 WCN	2938
4.139.3.32 WCN2	2938

4.139.3.33 COMPARE	2938
4.139.3.34 FIXEDGLOBALS	2938
4.140 structs.h	2938
4.141 symmetr.c File Reference	2963
4.141.1 Detailed Description	2963
4.141.2 Function Documentation	2963
4.141.2.1 MatchE()	2963
4.141.2.2 Permute()	2963
4.141.2.3 PermuteP()	2964
4.141.2.4 Distribute()	2964
4.141.2.5 MatchCy()	2964
4.141.2.6 FunMatchCy()	2964
4.141.2.7 FunMatchSy()	2964
4.141.2.8 MatchArgument()	2965
4.142 symmetr.c	2965
4.143 tables.c File Reference	2992
4.143.1 Detailed Description	2993
4.143.2 Function Documentation	2993
4.143.2.1 ClearTableTree()	2993
4.143.2.2 InsTableTree()	2993
4.143.2.3 RedoTableTree()	2993
4.143.2.4 FindTableTree()	2993
4.143.2.5 DoTableExpansion()	2994
4.143.2.6 CoTableBase()	2994
4.143.2.7 FlipTable()	2994
4.143.2.8 SpareTable()	2994
4.143.2.9 FindTB()	2994
4.143.2.10 CoTBcreate()	2994
4.143.2.11 CoTBopen()	2994
4.143.2.12 CoTBaddto()	2995
4.143.2.13 CoTBenter()	2995
4.143.2.14 CoTestUse()	2995
4.143.2.15 CheckTableDeclarations()	2995
4.143.2.16 CoTBload()	2995
4.143.2.17 TestUse()	2995
4.143.2.18 CoTBaudit()	2995
4.143.2.19 CoTBon()	2996
4.143.2.20 CoTBoff()	2996
4.143.2.21 CoTBcleanup()	2996
4.143.2.22 CoTBreplace()	2996
4.143.2.23 CoTBuse()	2996
4.143.2.24 CoApply()	2996

4.143.2.25 CoTBhelp()	2996
4.143.2.26 ReWorkT()	2997
4.143.2.27 Apply()	2997
4.143.2.28 ApplyExec()	2997
4.143.2.29 ApplyReset()	2997
4.143.2.30 TableReset()	2997
4.143.2.31 ReleaseTB()	2997
4.143.3 Variable Documentation	2998
4.143.3.1 helptb	2998
4.144 tables.c	2998
4.145 threads.c File Reference	3025
4.145.1 Detailed Description	3025
4.146 threads.c	3025
4.147 token.c File Reference	3079
4.147.1 Detailed Description	3080
4.147.2 Macro Definition Documentation	3080
4.147.2.1 CHECKPOLY	3080
4.147.3 Function Documentation	3080
4.147.3.1 tokenize()	3080
4.147.3.2 WriteTokens()	3080
4.147.3.3 simp1token()	3080
4.147.3.4 simpwtoken()	3081
4.147.3.5 simp2token()	3081
4.147.3.6 simp3atoken()	3081
4.147.3.7 simp3btoken()	3081
4.147.3.8 simp4token()	3081
4.147.3.9 simp5token()	3081
4.147.3.10 simp6token()	3082
4.147.4 Variable Documentation	3082
4.147.4.1 ttypes	3082
4.148 token.c	3082
4.149 tools.c File Reference	3107
4.149.1 Detailed Description	3109
4.149.2 Macro Definition Documentation	3109
4.149.2.1 FILLVALUE	3109
4.149.2.2 TERMMEMSTARTNUM	3110
4.149.2.3 TERMEXTRAWORDS	3110
4.149.2.4 NUMBERMEMSTARTNUM	3110
4.149.2.5 NUMBEREXTRAWORDS	3110
4.149.2.6 DODOUBLE	3110
4.149.2.7 DOEXPAND	3111
4.149.3 Function Documentation	3111

4.149.3.1 LoadInputFile()	3111
4.149.3.2 ReadFromStream()	3111
4.149.3.3 GetFromStream()	3111
4.149.3.4 LookInStream()	3111
4.149.3.5 OpenStream()	3111
4.149.3.6 LocateFile()	3112
4.149.3.7 CloseStream()	3112
4.149.3.8 CreateStream()	3112
4.149.3.9 GetStreamPosition()	3112
4.149.3.10 PositionStream()	3112
4.149.3.11 ReverseStatements()	3112
4.149.3.12 StartFiles()	3112
4.149.3.13 OpenFile()	3113
4.149.3.14 OpenAddFile()	3113
4.149.3.15 ReOpenFile()	3113
4.149.3.16 CreateFile()	3113
4.149.3.17 CreateLogFile()	3113
4.149.3.18 CloseFile()	3113
4.149.3.19 CopyFile()	3114
4.149.3.20 CreateHandle()	3114
4.149.3.21 ReadFile()	3114
4.149.3.22 ReadPosFile()	3114
4.149.3.23 WriteFileToFile()	3114
4.149.3.24 SeekFile()	3115
4.149.3.25 TellFile()	3115
4.149.3.26 TELLFILE()	3115
4.149.3.27 FlushFile()	3115
4.149.3.28 GetPosFile()	3115
4.149.3.29 SetPosFile()	3115
4.149.3.30 SynchFile()	3116
4.149.3.31 TruncateFile()	3116
4.149.3.32 GetChannel()	3116
4.149.3.33 GetAppendChannel()	3116
4.149.3.34 CloseChannel()	3116
4.149.3.35 UpdateMaxSize()	3116
4.149.3.36 StrCmp()	3116
4.149.3.37 StrlCmp()	3117
4.149.3.38 StrHlCmp()	3117
4.149.3.39 StrlCont()	3117
4.149.3.40 CmpArray()	3117
4.149.3.41 ConWord()	3117
4.149.3.42 StrLen()	3117

4.149.3.43 NumToStr()	3118
4.149.3.44 WriteString()	3118
4.149.3.45 WriteUnfinString()	3118
4.149.3.46 AddToString()	3118
4.149.3.47 strDup1()	3118
4.149.3.48 EndOfToken()	3118
4.149.3.49 ToToken()	3119
4.149.3.50 SkipField()	3119
4.149.3.51 ReadSnum()	3119
4.149.3.52 NumCopy()	3119
4.149.3.53 LongCopy()	3119
4.149.3.54 LongLongCopy()	3119
4.149.3.55 MakeDate()	3120
4.149.3.56 set_in()	3120
4.149.3.57 set_set()	3120
4.149.3.58 set_del()	3120
4.149.3.59 set_sub()	3120
4.149.3.60 iniTools()	3120
4.149.3.61 Malloc1()	3121
4.149.3.62 M_free()	3121
4.149.3.63 M_check1()	3121
4.149.3.64 M_print()	3121
4.149.3.65 TermMallocAddMemory()	3121
4.149.3.66 NumberMallocAddMemory()	3121
4.149.3.67 CacheNumberMallocAddMemory()	3121
4.149.3.68 FromList()	3122
4.149.3.69 From0List()	3122
4.149.3.70 FromVarList()	3122
4.149.3.71 DoubleList()	3122
4.149.3.72 DoubleLList()	3122
4.149.3.73 DoubleBuffer()	3122
4.149.3.74 ExpandBuffer()	3123
4.149.3.75 iexp()	3123
4.149.3.76 ToGeneral()	3123
4.149.3.77 ToFast()	3123
4.149.3.78 ToPolyFunGeneral()	3123
4.149.3.79 IsLikeVector()	3123
4.149.3.80 AreArgsEqual()	3124
4.149.3.81 CompareArgs()	3124
4.149.3.82 CompArg()	3124
4.149.3.83 TimeWallClock()	3124
4.149.3.84 TimeChildren()	3124

4.149.3.85 TimeCPU()	3125
4.149.3.86 Crash()	3125
4.149.3.87 TestTerm()	3125
4.149.3.88 DistrN()	3126
4.149.4 Variable Documentation	3126
4.149.4.1 filelist	3126
4.149.4.2 numinfilelist	3126
4.149.4.3 filelistsize	3126
4.149.4.4 WriteFile	3126
4.150 tools.c	3127
4.151 topowrap.cc File Reference	3172
4.151.1 Detailed Description	3173
4.151.2 Macro Definition Documentation	3173
4.151.2.1 MAXPOINTS	3173
4.151.3 Function Documentation	3173
4.151.3.1 GenerateVertices()	3173
4.151.3.2 GenerateTopologies()	3173
4.151.3.3 toForm()	3173
4.152 topowrap.cc	3174
4.153 transform.c File Reference	3177
4.153.1 Detailed Description	3178
4.153.2 Function Documentation	3178
4.153.2.1 CoTransform()	3178
4.153.2.2 RunTransform()	3178
4.153.2.3 RunEncode()	3178
4.153.2.4 RunDecode()	3178
4.153.2.5 RunReplace()	3179
4.153.2.6 RunImplode()	3179
4.153.2.7 RunExplode()	3179
4.153.2.8 RunPermute()	3179
4.153.2.9 RunReverse()	3179
4.153.2.10 RunDedup()	3179
4.153.2.11 RunCycle()	3180
4.153.2.12 RunAddArg()	3180
4.153.2.13 RunMulArg()	3180
4.153.2.14 RunIsLyndon()	3180
4.153.2.15 RunToLyndon()	3180
4.153.2.16 RunDropArg()	3180
4.153.2.17 RunSelectArg()	3181
4.153.2.18 RunZtoHArg()	3181
4.153.2.19 RunHtoZArg()	3181
4.153.2.20 TestArgNum()	3181

4.153.2.21 PutArgInScratch()	3181
4.153.2.22 ReadRange()	3181
4.153.2.23 FindRange()	3182
4.154 transform.c	3182
4.155 unix.h File Reference	3223
4.155.1 Detailed Description	3224
4.155.2 Macro Definition Documentation	3224
4.155.2.1 LINEFEED	3224
4.155.2.2 CARRIAGERETURN	3224
4.155.2.3 WITHPIPE	3224
4.155.2.4 WITHSYSTEM	3224
4.155.2.5 WITHEXTERNALCHANNEL	3225
4.155.2.6 TRAP SIGNALS	3225
4.155.2.7 P_term	3225
4.155.2.8 SEPARATOR	3225
4.155.2.9 ALTSEPARATOR	3225
4.155.2.10 PATHSEPARATOR	3225
4.155.2.11 WITH_ENV	3225
4.155.2.12 WITH_ALARM	3226
4.156 unix.h	3226
4.157 unixfile.c File Reference	3227
4.157.1 Detailed Description	3227
4.158 unixfile.c	3227
4.159 variable.h File Reference	3230
4.159.1 Detailed Description	3231
4.159.2 Macro Definition Documentation	3232
4.159.2.1 chartype	3232
4.159.2.2 Procedures	3232
4.159.2.3 NumProcedures	3232
4.159.2.4 MaxProcedures	3232
4.159.2.5 DoLoops	3232
4.159.2.6 NumDoLoops	3232
4.159.2.7 MaxDoLoops	3232
4.159.2.8 PreVar	3233
4.159.2.9 NumPre	3233
4.159.2.10 MaxNumPre	3233
4.159.2.11 SetElements	3233
4.159.2.12 Sets	3233
4.159.2.13 functions	3233
4.159.2.14 indices	3233
4.159.2.15 symbols	3233
4.159.2.16 vectors	3234

4.159.2.17 tablebases	3234
4.159.2.18 NumFunctions	3234
4.159.2.19 NumIndices	3234
4.159.2.20 NumSymbols	3234
4.159.2.21 NumVectors	3234
4.159.2.22 NumSets	3234
4.159.2.23 NumSetElements	3234
4.159.2.24 NumTableBases	3235
4.159.2.25 GlobalFunctions	3235
4.159.2.26 GlobalIndices	3235
4.159.2.27 GlobalSymbols	3235
4.159.2.28 GlobalVectors	3235
4.159.2.29 GlobalSets	3235
4.159.2.30 GlobalSetElements	3235
4.159.2.31 cbuf	3235
4.159.2.32 channels	3236
4.159.2.33 NumOutputChannels	3236
4.159.2.34 Dollars	3236
4.159.2.35 NumDollars	3236
4.159.2.36 Dubious	3236
4.159.2.37 NumDubious	3236
4.159.2.38 Expressions	3236
4.159.2.39 NumExpressions	3236
4.159.2.40 autofunctions	3237
4.159.2.41 autoindices	3237
4.159.2.42 autosymbols	3237
4.159.2.43 autovectors	3237
4.159.2.44 xsymbol	3237
4.159.2.45 numxsymbol	3237
4.159.2.46 PotModdollars	3237
4.159.2.47 NumPotModdollars	3237
4.159.2.48 ModOptdollars	3238
4.159.2.49 NumModOptdollars	3238
4.159.2.50 BUG	3238
4.159.2.51 AC	3238
4.159.2.52 AM	3238
4.159.2.53 AN	3238
4.159.2.54 AO	3238
4.159.2.55 AP	3238
4.159.2.56 AR	3239
4.159.2.57 AS	3239
4.159.2.58 AT	3239

4.159.2.59 AX	3239
4.159.3 Variable Documentation	3239
4.159.3.1 WriteFile	3239
4.159.3.2 A	3239
4.159.3.3 FG	3239
4.159.3.4 fixedsets	3240
4.159.3.5 setupfilename	3240
4.160 variable.h	3240
4.161 vector.h File Reference	3242
4.161.1 Detailed Description	3243
4.161.2 Macro Definition Documentation	3243
4.161.2.1 VectorStruct	3243
4.161.2.2 Vector	3243
4.161.2.3 DeclareVector	3244
4.161.2.4 VectorInit	3244
4.161.2.5 VectorFree	3244
4.161.2.6 VectorPtr	3245
4.161.2.7 VectorFront	3245
4.161.2.8 VectorBack	3246
4.161.2.9 VectorSize	3246
4.161.2.10 VectorCapacity	3246
4.161.2.11 VectorEmpty	3247
4.161.2.12 VectorClear	3247
4.161.2.13 VectorReserve	3247
4.161.2.14 VectorPushBack	3248
4.161.2.15 VectorPushBacks	3248
4.161.2.16 VectorPopBack	3249
4.161.2.17 VectorInsert	3249
4.161.2.18 VectorInserts	3249
4.161.2.19 VectorErase	3250
4.161.2.20 VectorErases	3250
4.162 vector.h	3251
4.163 wildcard.c File Reference	3254
4.163.1 Detailed Description	3254
4.163.2 Macro Definition Documentation	3255
4.163.2.1 DEBUG	3255
4.163.3 Function Documentation	3255
4.163.3.1 WildFill()	3255
4.163.3.2 ResolveSet()	3255
4.163.3.3 ClearWild()	3255
4.163.3.4 AddWild()	3255
4.163.3.5 CheckWild()	3256

4.163.3.6 DenToFunction()	3256
4.164 wildcard.c	3256

Chapter 1

Data Structure Index

1.1 Data Structures

Here are the data structures with brief descriptions:

AEdge	7
AllGlobals	9
ANode	11
ARGBUFFER	14
Assign	15
AStack	26
bit_field	29
BrAcKeTiNdEx	31
BracketInfo	33
BrAcKeTiNfO	35
bufIPstruct	37
C_const	38
CbUf	70
ChAnNeL	75
COST	75
CSEEq	76
CSEHash	77
dbase	78
DGraph	80
DICTIONARY	81
DICTIONARY_ELEMENT	83
DiStRiBuTe	84
DNode	86
dollar_buf	87
DoLIArS	87
DoLoOp	89
DuBiOuS	93
ECand	94
EEdge	95
EFLine	100
EGraph	102
ENode	115
EStack	119
ExPrEsSiOn	120
FaCdOILaR	124

factorized_poly	125
FGInput	126
FiLe	128
FiLeDaTa	131
FiLeInDeX	132
FixedGlobals	134
fixedset	136
flint::fmpz	137
Fraction	138
FUN_INFO	141
FuNcTiOn	143
gcd_heuristic_failed	146
HANDLERS	146
IInput	148
InDeX	149
indexblock	151
InDeXeNtRy	152
iniinfo	155
INSIDEINFO	156
Interaction	158
KEYWORD	162
KEYWORDV	163
LIST	164
longMultiStruct	166
M_const	167
MCBlock	192
MCBridge	194
MCEdge	195
MConn	196
MCOpi	203
MGraph	206
MiNmAx	218
MInput	219
MNode	220
MNodeClass	222
Model	227
MoDeL	235
MODNUM	237
MoDoPtDoLIaRS	238
monomial_larger	239
MOrbits	240
flint::mpoly	242
flint::mpoly_ctx	243
flint::mpoly_factor	244
N_const	245
nameblock	262
NaMeNode	263
NaMeSpAcE	264
NaMeTree	266
NCand	269
NCInput	270
NeStInG	272
node	273
NoDe	275
NodeEq	276
NodeHash	277
NStack	277
O_const	279

objects	289
OptDef	291
optimization	292
OPTIMIZE	295
OPTIMIZERESULT	298
Options	299
OptQGDef	307
OptQGRef	308
Output	309
P_const	315
ParallelVars	323
PaRtl	325
Particle	327
PaRtlcLe	331
PeRmUtE	332
PeRmUtEp	333
PF_BUFFER	334
PGInput	336
PInput	338
PNodeClass	339
flint::poly	343
poly	344
flint::poly_factor	361
POLYMOD	362
PoSiTiOn	363
PRELOAD	364
pReVaR	365
PROCEDURE	366
Process	367
R_const	374
ReNuMbEr	383
S_const	386
SeTs	388
SETUPPARAMETERS	389
SGroup	391
SHvariables	395
sOrT	397
SpecTatoR	406
SProcess	407
StOrEcAcHe	416
STOREHEADER	417
StreaM	420
SuBbUf	425
SWITCH	426
SWITCHTABLE	428
SyMbOl	429
T_const	431
T_EEdge	445
T_EGraph	446
T_ENode	450
T_MGraph	451
T_MNode	456
T_MNodeClass	458
TaBIeBAsE	462
TaBIeBAsEsUbInDeX	463
TaBIes	464
TERMINFO	471
ToPoTyPe	473

TrAcEn	476
TrAcEs	478
tree	483
tree_node	485
VaRrEnUm	487
VeCtOr	488
VeRtEx	490
X_const	492

Chapter 2

File Index

2.1 File List

Here is a list of all documented files with brief descriptions:

argument.c	495
bugtool.c	541
checkpoint.c	543
comexpr.c	587
compcomm.c	615
compiler.c	728
compress.c	760
comtool.c	769
comtool.h	782
declare.h	784
diagrams.c	1057
diawrap.cc	1067
dict.c	1083
dollar.c	1101
evaluate.c	1156
execute.c	1169
extcmd.c	1205
factor.c	1226
findpat.c	1237
flintinterface.cc	1255
flintinterface.h	1282
flintwrap.cc	1292
float.c	1299
form3.h	1341
fsizes.h	1356
ftypes.h	1368
function.c	1488
fwin.h	1513
gentopo.cc	1515
gentopo.h	1534
grcc.cc	1536
grcc.h	1663
grccparam.h	1680
if.c	1683
index.c	1700


inivar.h	1710
lus.c	1715
mallocprotect.h	1737
message.c	1741
minos.c	1756
minos.h	1780
model.c	1785
module.c	1792
mpi.c	1805
mpidbg.h	1840
mytime.cc	1854
mytime.h	1854
names.c	1855
normal.c	1904
notation.c	1970
opera.c	1987
optimize.cc	2019
parallel.c	2093
parallel.h	2167
pattern.c	2203
poly.cc	2233
poly.h	2266
polyfact.cc	2269
polyfact.h	2286
polygcd.cc	2288
polygcd.h	2305
polywrap.cc	2307
portsignals.h	2340
pre.c	2345
proces.c	2457
ratio.c	2534
reken.c	2583
reshuf.c	2642
sch.c	2683
setfile.c	2722
smart.c	2742
sort.c	2748
spectator.c	2820
startup.c	2830
store.c	2860
structs.h	2929
symmetr.c	2963
tables.c	2992
threads.c	3025
token.c	3079
tools.c	3107
topowrap.cc	3172
transform.c	3177
unix.h	3223
unixfile.c	3227
variable.h	3230
vector.h	3242
wildcard.c	3254

Chapter 3

Data Structure Documentation

3.1 AEdge Class Reference

Collaboration diagram for AEdge:



Public Member Functions

- [AEdge](#) (int n0, int l0, int n1, int l1)

Data Fields

- [ECand](#) * [cand](#)
- int [nodes](#) [2]
- int [nlegs](#) [2]
- int [ptcl](#)
- int [DUMMY_PADDING](#)

3.1.1 Detailed Description

Definition at line [1164](#) of file [grcc.h](#).

3.1.2 Constructor & Destructor Documentation

3.1.2.1 AEdge()

```
AEdge::AEdge (
    int  n0,
    int  l0,
    int  n1,
    int  l1 )
```

Definition at line [8273](#) of file [grcc.cc](#).

3.1.2.2 ~AEdge()

```
AEdge::~AEdge (
    void  )
```

Definition at line [8284](#) of file [grcc.cc](#).

3.1.3 Field Documentation

3.1.3.1 cand

```
ECand* AEdge::cand
```

Definition at line [1171](#) of file [grcc.h](#).

3.1.3.2 nodes

```
int AEdge::nodes[2]
```

Definition at line [1172](#) of file [grcc.h](#).

3.1.3.3 nlegs

```
int AEdge::nlegs[2]
```

Definition at line [1173](#) of file [grcc.h](#).

3.1.3.4 ptcl

```
int AEdge::ptcl
```

Definition at line [1174](#) of file [grcc.h](#).

3.1.3.5 DUMMYPADDING

```
int AEdge::DUMMYPADDING
```

Definition at line 1176 of file [grcc.h](#).


The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.2 AllGlobals Struct Reference

```
#include <structs.h>
```

Collaboration diagram for AllGlobals:

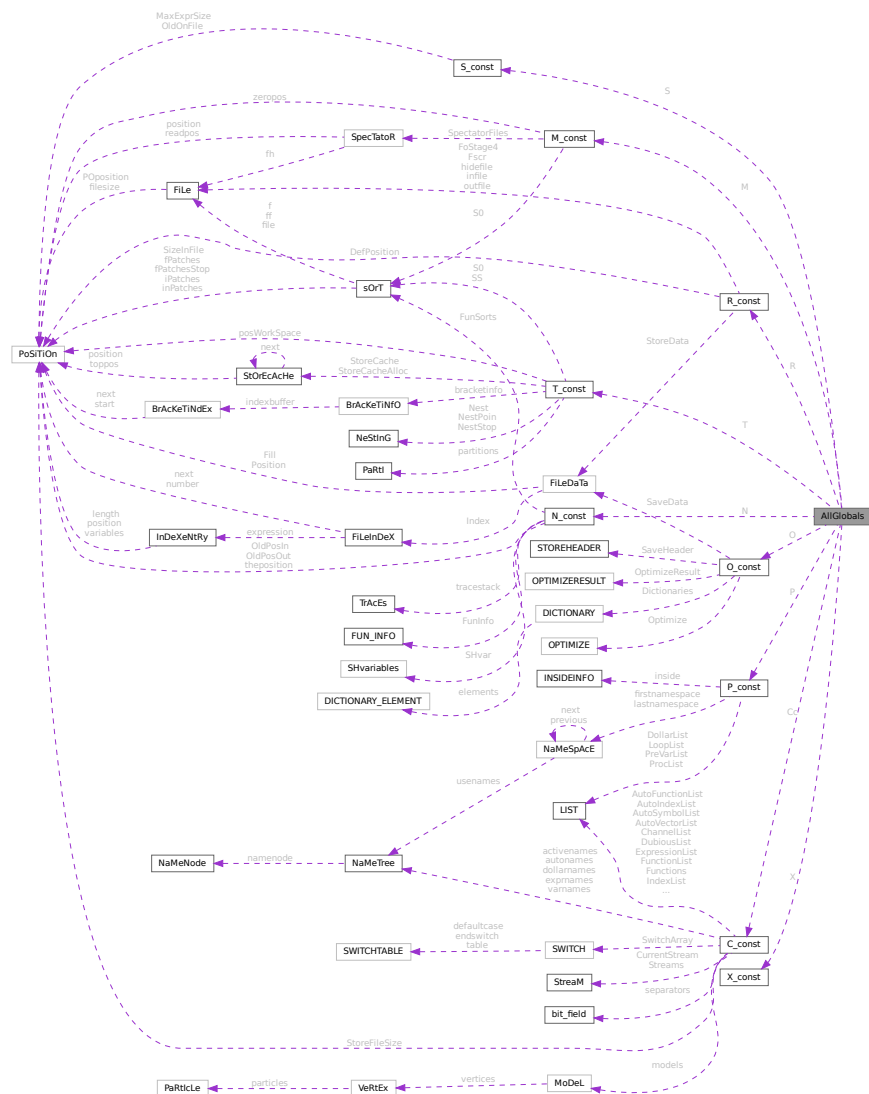

Data Fields

- struct [M_const](#) M
- struct [C_const](#) Cc
- struct [S_const](#) S
- struct [R_const](#) R
- struct [N_const](#) N
- struct [O_const](#) O
- struct [P_const](#) P
- struct [T_const](#) T
- struct [X_const](#) X

3.2.1 Detailed Description

Without pthreads (FORM) the ALLGLOBALS struct has all the global variables

Definition at line [2468](#) of file [structs.h](#).

3.2.2 Field Documentation

3.2.2.1 M

```
struct M\_const AllGlobals::M
```

Definition at line [2469](#) of file [structs.h](#).

3.2.2.2 Cc

```
struct C\_const AllGlobals::Cc
```

Definition at line [2470](#) of file [structs.h](#).

3.2.2.3 S

```
struct S\_const AllGlobals::S
```

Definition at line [2471](#) of file [structs.h](#).

3.2.2.4 R

```
struct R\_const AllGlobals::R
```

Definition at line [2472](#) of file [structs.h](#).

3.2.2.5 N

```
struct N_const AllGlobals::N
```

Definition at line 2473 of file [structs.h](#).

3.2.2.6 O

```
struct O_const AllGlobals::O
```

Definition at line 2474 of file [structs.h](#).

3.2.2.7 P

```
struct P_const AllGlobals::P
```

Definition at line 2475 of file [structs.h](#).

3.2.2.8 T

```
struct T_const AllGlobals::T
```

Definition at line 2476 of file [structs.h](#).

3.2.2.9 X

```
struct X_const AllGlobals::X
```

Definition at line 2477 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.3 ANode Class Reference

Collaboration diagram for ANode:



Public Member Functions

- [ANode](#) (int dg)
- int [newleg](#) (void)

Data Fields

- int [deg](#)
- int [nlegs](#)
- int * [anodes](#)
- int * [aedges](#)
- int * [aelegs](#)
- [NCand](#) * [cand](#)

3.3.1 Detailed Description

Definition at line [1140](#) of file [grcc.h](#).

3.3.2 Constructor & Destructor Documentation

3.3.2.1 ANode()

```
ANode::ANode (
    int dg )
```

Definition at line [8218](#) of file [grcc.cc](#).

3.3.2.2 ~ANode()

```
ANode::~ANode (
    void )
```

Definition at line [8236](#) of file [grcc.cc](#).

3.3.3 Member Function Documentation

3.3.3.1 newleg()

```
int ANode::newleg (
    void )
```

Definition at line [8253](#) of file [grcc.cc](#).

3.3.4 Field Documentation

3.3.4.1 deg

```
int ANode::deg
```

Definition at line 1150 of file [grcc.h](#).

3.3.4.2 nlegs

```
int ANode::nlegs
```

Definition at line 1151 of file [grcc.h](#).

3.3.4.3 anodes

```
int* ANode::anodes
```

Definition at line 1152 of file [grcc.h](#).

3.3.4.4 aedges

```
int* ANode::aedges
```

Definition at line 1153 of file [grcc.h](#).

3.3.4.5 aelegs

```
int* ANode::aelegs
```

Definition at line 1154 of file [grcc.h](#).

3.3.4.6 cand

```
NCand* ANode::cand
```


Definition at line 1155 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.4 ARGBUFFER Struct Reference

Collaboration diagram for ARGBUFFER:

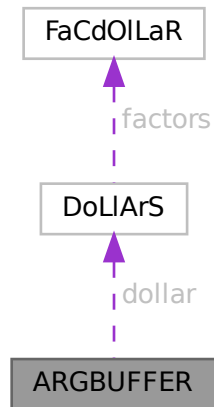

Data Fields

- WORD * [buffer](#)
- DOLLARS [dollar](#)
- LONG [size](#)
- int [type](#)
- int [dummy](#)

3.4.1 Detailed Description

Definition at line [601](#) of file [ratio.c](#).

3.4.2 Field Documentation

3.4.2.1 buffer

```
WORD* ARGBUFFER::buffer
```

Definition at line [602](#) of file [ratio.c](#).

3.4.2.2 dollar

```
DOLLARS ARGBUFFER::dollar
```

Definition at line [603](#) of file [ratio.c](#).

LONG ARGBUFFER::size

Definition at line 604 of file ratio.c.

```
int ARGBUFFER::type
```

Definition at line 605 of file ratio.c.


```
int  ARGBUFFER::dummy
```

Definition at line 606 of file ratio.c.

The documentation for this struct was generated from the following file:

- `ratio.c`

Collaboration diagram for Assign:

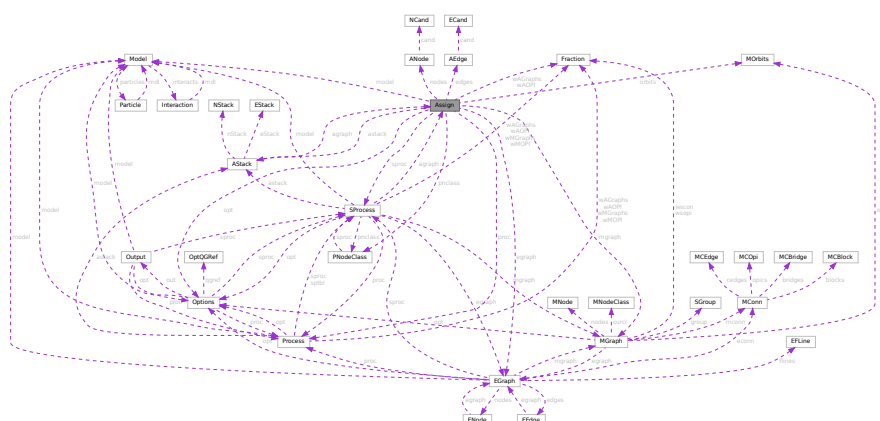

Public Member Functions

- [Assign](#) ([SProcess](#) *sprc, [MGraph](#) *mgr, [PNodeClass](#) *pnc)
- void [prCand](#) (const char *msg)
- void [checkAG](#) (const char *msg)
- Bool [assignAllVertices](#) (void)
- Bool [selectVertex](#) (void)
- Bool [selectVertexSimp](#) (int lastv)
- Bool [selectLeg](#) (int v, int lastlg)
- Bool [assignVertex](#) (int v)
- Bool [allAssigned](#) (void)
- Bool [fromMGraph](#) (void)
- void [addEdge](#) (int n0, int n1, int nplist, int *plist)
- void [connect](#) (int n0, int l0, int eg, int el, int n1, int l1)
- Bool [fillEGraph](#) (int aid, BigInt nsym, BigInt esym, BigInt nsym1)
- int * [reordLeg](#) (int n, int *reord, int *plist, int *used)
- int [getLegParticle](#) (int n, int ln)
- int [legEdgeParticle](#) (int n, int ln, int pt)
- int [legPart](#) (int v, int lg, int nplst, int *plst, int *rlist, const int size)
- int [candPart](#) (int v, int ln, int *plist, const int size)
- int [selUnAssVertex](#) (void)
- int [selUnAssVertexSimp](#) (int lastv)
- int [selUnAssLeg](#) (int v, int lastlg)
- NCandSt [assignVertex](#) (int v, int ia)
- Bool [assignPLeg](#) (int n, int ln, int pt)
- Bool [isOrdPLeg](#) (int n, int ln, int pt)
- Bool [detEdge](#) (int e)
- Bool [candPartClassify](#) (int v, int *npdass, int *pdass, int *npuass, int *puass, const int size)
- Bool [updateCandNode](#) (int v)
- Bool [checkOrderCpl](#) (void)
- Bool [isOrdLegs](#) (void)
- Bool [isIsomorphic](#) ([MNodeClass](#) *cl, BigInt *nsym, BigInt *esym, BigInt *nsym1)
- int [cmpPermGraph](#) (int *p, [MNodeClass](#) *cl)
- int [cmpNodes](#) (int nd0, int nd1, [MNodeClass](#) *cn)
- BigInt [edgeSym](#) (void)
- void [saveCouple](#) (int *sav)
- void [restoreCouple](#) (int *sav)
- Bool [subCouple](#) (int *cpl)
- Bool [checkCand](#) (const char *msg)
- void [checkNode](#) (int n, const char *msg)

Data Fields

- [EGraph](#) * egraph
- [MGraph](#) * mgraph
- [SProcess](#) * sprc
- [Process](#) * proc
- [Model](#) * model
- [Options](#) * opt
- [AStack](#) * astack
- [PNodeClass](#) * pnclass
- [MOrbits](#) * orbits
- int [nNodes](#)
- int [nEdges](#)

- int [nExtern](#)
- int [nETotal](#)
- BigInt [nAGraphs](#)
- Fraction [wAGraphs](#)
- BigInt [nAOPI](#)
- Fraction [wAOPI](#)
- ANode ** [nodes](#)
- AEdge ** [edges](#)
- CheckPt [checkpoint0](#)
- int [cplleft](#) [GRCC_MAXNCPLG]

3.5.1 Detailed Description

Definition at line [1183](#) of file [grcc.h](#).

3.5.2 Constructor & Destructor Documentation

3.5.2.1 Assign()

```
Assign::Assign (
    SProcess * sprc,
    MGraph * mgr,
    PNodeClass * pnc )
```

Definition at line [8293](#) of file [grcc.cc](#).

3.5.2.2 ~Assign()

```
Assign::~Assign (
    void )
```

Definition at line [8369](#) of file [grcc.cc](#).

3.5.3 Member Function Documentation

3.5.3.1 prCand()

```
void Assign::prCand (
    const char * msg )
```

Definition at line [8389](#) of file [grcc.cc](#).

3.5.3.2 checkAG()

```
void Assign::checkAG (
    const char * msg )
```

Definition at line [8425](#) of file [grcc.cc](#).

3.5.3.3 assignAllVertices()

```
Bool Assign::assignAllVertices (
    void )
```

Definition at line [8449](#) of file [grcc.cc](#).

3.5.3.4 selectVertex()

```
Bool Assign::selectVertex (
    void )
```

Definition at line [8512](#) of file [grcc.cc](#).

3.5.3.5 selectVertexSimp()

```
Bool Assign::selectVertexSimp (
    int lastv )
```

Definition at line [8473](#) of file [grcc.cc](#).

3.5.3.6 selectLeg()

```
Bool Assign::selectLeg (
    int v,
    int lastlg )
```

Definition at line [8551](#) of file [grcc.cc](#).

3.5.3.7 assignVertex()

```
Bool Assign::assignVertex (
    int v )
```

Definition at line [8653](#) of file [grcc.cc](#).

3.5.3.8 allAssigned()

```
Bool Assign::allAssigned (
    void )
```

Definition at line [8776](#) of file [grcc.cc](#).

3.5.3.9 fromMGraph()

```
Bool Assign::fromMGraph (
    void )
```

Definition at line [8856](#) of file [grcc.cc](#).

3.5.3.10 addEdge()

```
void Assign::addEdge (
    int n0,
    int n1,
    int nplist,
    int * plist )
```

Definition at line 9002 of file [grcc.cc](#).

3.5.3.11 connect()

```
void Assign::connect (
    int n0,
    int l0,
    int eg,
    int el,
    int n1,
    int l1 )
```

Definition at line 9047 of file [grcc.cc](#).

3.5.3.12 fillEGraph()

```
Bool Assign::fillEGraph (
    int aid,
    BigInt nsym,
    BigInt esym,
    BigInt nsym1 )
```

Definition at line 9076 of file [grcc.cc](#).

3.5.3.13 reordLeg()

```
int * Assign::reordLeg (
    int n,
    int * reord,
    int * plist,
    int * used )
```

Definition at line 9216 of file [grcc.cc](#).

3.5.3.14 getLegParticle()

```
int Assign::getLegParticle (
    int n,
    int ln )
```

Definition at line 9291 of file [grcc.cc](#).

3.5.3.15 legEdgeParticle()

```
int Assign::legEdgeParticle (
    int n,
    int ln,
    int pt )
```

Definition at line 9318 of file [grcc.cc](#).

3.5.3.16 legPart()

```
int Assign::legPart (
    int v,
    int lg,
    int nplst,
    int * plst,
    int * rlist,
    const int size )
```

Definition at line 9338 of file [grcc.cc](#).

3.5.3.17 candPart()

```
int Assign::candPart (
    int v,
    int ln,
    int * plist,
    const int size )
```

Definition at line 9354 of file [grcc.cc](#).

3.5.3.18 selUnAssVertex()

```
int Assign::selUnAssVertex (
    void )
```

Definition at line 9407 of file [grcc.cc](#).

3.5.3.19 selUnAssVertexSimp()

```
int Assign::selUnAssVertexSimp (
    int lastv )
```

Definition at line 9387 of file [grcc.cc](#).

3.5.3.20 selUnAssLeg()

```
int Assign::selUnAssLeg (
    int v,
    int lastlg )
```

Definition at line 9436 of file [grcc.cc](#).

3.5.3.21 assignVertex()

```
NCandSt Assign::assignVertex (
    int v,
    int ia )
```

Definition at line 9475 of file [grcc.cc](#).

3.5.3.22 assignPLeg()

```
Bool Assign::assignPLeg (
    int n,
    int ln,
    int pt )
```

Definition at line 9521 of file [grcc.cc](#).

3.5.3.23 isOrdPLeg()

```
Bool Assign::isOrdPLeg (
    int n,
    int ln,
    int pt )
```

Definition at line 9594 of file [grcc.cc](#).

3.5.3.24 detEdge()

```
Bool Assign::detEdge (
    int e )
```

Definition at line 9573 of file [grcc.cc](#).

3.5.3.25 candPartClassify()

```
Bool Assign::candPartClassify (
    int v,
    int * npdass,
    int * pdass,
    int * npuass,
    int * puass,
    const int size )
```

Definition at line 9638 of file [grcc.cc](#).

3.5.3.26 updateCandNode()

```
Bool Assign::updateCandNode (
    int v )
```

Definition at line 9675 of file [grcc.cc](#).

3.5.3.27 checkOrderCpl()

```
Bool Assign::checkOrderCpl (
    void )
```

Definition at line 9814 of file [grcc.cc](#).

3.5.3.28 isOrdLegs()

```
Bool Assign::isOrdLegs (
    void )
```

Definition at line 9852 of file [grcc.cc](#).

3.5.3.29 isIsomorphic()

```
Bool Assign::isIsomorphic (
    MNodeClass * cl,
    BigInt * nsym,
    BigInt * esym,
    BigInt * nsym1 )
```

Definition at line 9890 of file [grcc.cc](#).

3.5.3.30 cmpPermGraph()

```
int Assign::cmpPermGraph (
    int * p,
    MNodeClass * cl )
```

Definition at line 9966 of file [grcc.cc](#).

3.5.3.31 cmpNodes()

```
int Assign::cmpNodes (
    int nd0,
    int nd1,
    MNodeClass * cn )
```

Definition at line 10048 of file [grcc.cc](#).

3.5.3.32 edgeSym()

```
BigInt Assign::edgeSym (
    void )
```

Definition at line 10068 of file [grcc.cc](#).

3.5.3.33 saveCouple()

```
void Assign::saveCouple (
    int * sav )
```

Definition at line 8613 of file [grcc.cc](#).

3.5.3.34 restoreCouple()

```
void Assign::restoreCouple (
    int * sav )
```

Definition at line 8625 of file [grcc.cc](#).

3.5.3.35 subCouple()

```
Bool Assign::subCouple (
    int * cpl )
```

Definition at line 8637 of file [grcc.cc](#).

3.5.3.36 checkCand()

```
Bool Assign::checkCand (
    const char * msg )
```

Definition at line 10127 of file [grcc.cc](#).

3.5.3.37 checkNode()

```
void Assign::checkNode (
    int n,
    const char * msg )
```

Definition at line 10199 of file [grcc.cc](#).

3.5.4 Field Documentation

3.5.4.1 egraph

[EGraph*](#) Assign::egraph

Definition at line 1188 of file [grcc.h](#).

3.5.4.2 mgraph

`MGraph*` `Assign::mgraph`

Definition at line 1189 of file [grcc.h](#).

3.5.4.3 sproc

`SProcess*` `Assign::sproc`

Definition at line 1190 of file [grcc.h](#).

3.5.4.4 proc

`Process*` `Assign::proc`

Definition at line 1191 of file [grcc.h](#).

3.5.4.5 model

`Model*` `Assign::model`

Definition at line 1192 of file [grcc.h](#).

3.5.4.6 opt

`Options*` `Assign::opt`

Definition at line 1193 of file [grcc.h](#).

3.5.4.7 astack

`AStack*` `Assign::astack`

Definition at line 1194 of file [grcc.h](#).

3.5.4.8 pnclass

`PNodeClass*` `Assign::pnclass`

Definition at line 1195 of file [grcc.h](#).

3.5.4.9 orbits

`MOrbits*` `Assign::orbits`

Definition at line 1196 of file [grcc.h](#).

3.5.4.10 nNodes

```
int Assign::nNodes
```

Definition at line 1198 of file [grcc.h](#).

3.5.4.11 nEdges

```
int Assign::nEdges
```

Definition at line 1199 of file [grcc.h](#).

3.5.4.12 nExtern

```
int Assign::nExtern
```

Definition at line 1200 of file [grcc.h](#).

3.5.4.13 nETotal

```
int Assign::nETotal
```

Definition at line 1201 of file [grcc.h](#).

3.5.4.14 nAGraphs

```
BigInt Assign::nAGraphs
```

Definition at line 1203 of file [grcc.h](#).

3.5.4.15 wAGraphs

```
Fraction Assign::wAGraphs
```

Definition at line 1204 of file [grcc.h](#).

3.5.4.16 nAOPI

```
BigInt Assign::nAOPI
```

Definition at line 1205 of file [grcc.h](#).

3.5.4.17 wAOPI

```
Fraction Assign::wAOPI
```

Definition at line 1206 of file [grcc.h](#).

Public Member Functions

- [AStack](#) (int nSize, int eSize)
- void [setAGraph](#) ([Assign](#) *ag)
- void [checkPoint](#) (CheckPt sav)
- void [restore](#) (CheckPt sav)
- void [restoreMsg](#) (CheckPt sav, const char *msg)
- void [prStack](#) (void)
- void [pushNode](#) (int n)
- void [pushEdge](#) (int e)

Data Fields

- [Assign](#) * [agraph](#)
- [NStack](#) ** [nStack](#)
- int [nStackP](#)
- int [nSize](#)
- [EStack](#) ** [eStack](#)
- int [eStackP](#)
- int [eSize](#)

3.6.1 Detailed Description

Definition at line [1367](#) of file [grcc.h](#).

3.6.2 Constructor & Destructor Documentation

3.6.2.1 AStack()

```
AStack::AStack (
    int nSize,
    int eSize )
```

Definition at line [10238](#) of file [grcc.cc](#).

3.6.2.2 ~AStack()

```
AStack::~~AStack (
    void )
```

Definition at line [10270](#) of file [grcc.cc](#).

3.6.3 Member Function Documentation

3.6.3.1 setAGraph()

```
void AStack::setAGraph (
    Assign * ag )
```

Definition at line [10298](#) of file [grcc.cc](#).

3.6.3.2 checkPoint()

```
void AStack::checkPoint (
    CheckPt sav )
```

Definition at line 10363 of file [grcc.cc](#).

3.6.3.3 restore()

```
void AStack::restore (
    CheckPt sav )
```

Definition at line 10407 of file [grcc.cc](#).

3.6.3.4 restoreMsg()

```
void AStack::restoreMsg (
    CheckPt sav,
    const char * msg )
```

Definition at line 10415 of file [grcc.cc](#).

3.6.3.5 prStack()

```
void AStack::prStack (
    void )
```

Definition at line 10430 of file [grcc.cc](#).

3.6.3.6 pushNode()

```
void AStack::pushNode (
    int n )
```

Definition at line 10304 of file [grcc.cc](#).

3.6.3.7 pushEdge()

```
void AStack::pushEdge (
    int e )
```

Definition at line 10334 of file [grcc.cc](#).

3.6.4 Field Documentation

3.6.4.1 agraph

```
Assign* AStack::agraph
```

Definition at line 1371 of file [grcc.h](#).

3.6.4.2 nStack

```
NStack** AStack::nStack
```

Definition at line 1373 of file [grcc.h](#).

3.6.4.3 nStackP

```
int AStack::nStackP
```

Definition at line 1374 of file [grcc.h](#).

3.6.4.4 nSize

```
int AStack::nSize
```

Definition at line 1375 of file [grcc.h](#).

3.6.4.5 eStack

```
EStack** AStack::eStack
```

Definition at line 1377 of file [grcc.h](#).

3.6.4.6 eStackP

```
int AStack::eStackP
```

Definition at line 1378 of file [grcc.h](#).

3.6.4.7 eSize

```
int AStack::eSize
```

Definition at line 1379 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.7 bit_field Struct Reference

```
#include <structs.h>
```

Data Fields

- UBYTE [bit_0](#): 1
- UBYTE [bit_1](#): 1
- UBYTE [bit_2](#): 1
- UBYTE [bit_3](#): 1
- UBYTE [bit_4](#): 1
- UBYTE [bit_5](#): 1
- UBYTE [bit_6](#): 1
- UBYTE [bit_7](#): 1

3.7.1 Detailed Description

The struct [bit_field](#) is used by `set_in`, `set_set`, `set_del` and `set_sub`. They in turn are used in [pre.c](#) to toggle bits that indicate whether a character can be used as a separator of function arguments. This facility is used in the communication with external channels.

Definition at line [906](#) of file [structs.h](#).

3.7.2 Field Documentation

3.7.2.1 `bit_0`

```
UBYTE bit_field::bit_0
```

Definition at line [907](#) of file [structs.h](#).

3.7.2.2 `bit_1`

```
UBYTE bit_field::bit_1
```

Definition at line [908](#) of file [structs.h](#).

3.7.2.3 `bit_2`

```
UBYTE bit_field::bit_2
```

Definition at line [909](#) of file [structs.h](#).

3.7.2.4 `bit_3`

```
UBYTE bit_field::bit_3
```

Definition at line [910](#) of file [structs.h](#).

3.7.2.5 bit_4

```
UBYTE bit_field::bit_4
```

Definition at line 911 of file [structs.h](#).

3.7.2.6 bit_5

```
UBYTE bit_field::bit_5
```

Definition at line 912 of file [structs.h](#).

3.7.2.7 bit_6

```
UBYTE bit_field::bit_6
```

Definition at line 913 of file [structs.h](#).

3.7.2.8 bit_7

```
UBYTE bit_field::bit_7
```


Definition at line 914 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.8 BrAcKeTiNdEx Struct Reference

Collaboration diagram for BrAcKeTiNdEx:



Data Fields

- [POSITION start](#)
- [POSITION next](#)
- LONG [bracket](#)
- LONG [termsinbracket](#)

3.8.1 Detailed Description

Definition at line [311](#) of file [structs.h](#).

3.8.2 Field Documentation

3.8.2.1 start

```
POSITION BrAcKeTiNdEx::start
```

Definition at line [312](#) of file [structs.h](#).

3.8.2.2 next

```
POSITION BrAcKeTiNdEx::next
```

Definition at line [313](#) of file [structs.h](#).

3.8.2.3 bracket

```
LONG BrAcKeTiNdEx::bracket
```

Definition at line [314](#) of file [structs.h](#).

3.8.2.4 termsinbracket

```
LONG BrAcKeTiNdEx::termsinbracket
```


Definition at line [315](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.9 BracketInfo Struct Reference

Collaboration diagram for BracketInfo:



Public Member Functions

- [BracketInfo](#) (const std::vector< int > &pattern, int num_terms, const [poly](#) *p)
- bool [operator<](#) (const [BracketInfo](#) &rhs) const

Data Fields

- std::vector< int > [pattern](#)
- int [num_terms](#)
- int [dummy](#) = 0
- const [poly](#) * [p](#)

3.9.1 Detailed Description

Definition at line [1389](#) of file [polygcd.cc](#).

3.9.2 Constructor & Destructor Documentation

3.9.2.1 BracketInfo()

```
BracketInfo::BracketInfo (
    const std::vector< int > & pattern,
    int num_terms,
    const poly * p ) [inline]
```

Definition at line [1394](#) of file [polygcd.cc](#).

3.9.3 Member Function Documentation

3.9.3.1 operator<()

```
bool BracketInfo::operator< (
    const BracketInfo & rhs ) const    [inline]
```

Definition at line [1395](#) of file [polygcd.cc](#).

3.9.4 Field Documentation

3.9.4.1 pattern

```
std::vector<int> BracketInfo::pattern
```

Definition at line [1390](#) of file [polygcd.cc](#).

3.9.4.2 num_terms

```
int BracketInfo::num_terms
```

Definition at line [1391](#) of file [polygcd.cc](#).

3.9.4.3 dummy

```
int BracketInfo::dummy = 0
```

Definition at line [1391](#) of file [polygcd.cc](#).

3.9.4.4 p

```
const poly* BracketInfo::p
```


Definition at line [1392](#) of file [polygcd.cc](#).

The documentation for this struct was generated from the following file:

- [polygcd.cc](#)

3.10 BrAcKeTiNfO Struct Reference

Collaboration diagram for BrAcKeTiNfO:

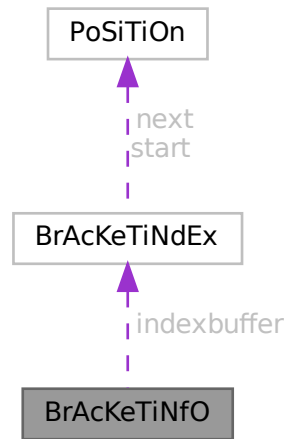

Data Fields

- [BRACKETINDEX](#) * `indexbuffer`
- WORD * `bracketbuffer`
- LONG `bracketbuffersize`
- LONG `indexbuffersize`
- LONG `bracketfill`
- LONG `indexfill`
- WORD `SortType`

3.10.1 Detailed Description

Definition at line 322 of file [structs.h](#).

3.10.2 Field Documentation

3.10.2.1 indexbuffer

[BRACKETINDEX](#)* `BrAcKeTiNfO::indexbuffer`

[D]

Definition at line 323 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [FlushOut\(\)](#).

3.10.2.2 bracketbuffer

```
WORD* BrAcKeTiNfO::bracketbuffer
```

[D]

Definition at line 324 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.10.2.3 bracketbuffersize

```
LONG BrAcKeTiNfO::bracketbuffersize
```

Definition at line 325 of file [structs.h](#).

3.10.2.4 indexbuffersize

```
LONG BrAcKeTiNfO::indexbuffersize
```

Definition at line 326 of file [structs.h](#).

3.10.2.5 bracketfill

```
LONG BrAcKeTiNfO::bracketfill
```

Definition at line 327 of file [structs.h](#).

3.10.2.6 indexfill

```
LONG BrAcKeTiNfO::indexfill
```

Definition at line 328 of file [structs.h](#).

3.10.2.7 SortType

```
WORD BrAcKeTiNfO::SortType
```

The sorting criterium used (like POWERFIRST etc)


Definition at line 329 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.11 bufIPstruct Struct Reference

Collaboration diagram for bufIPstruct:

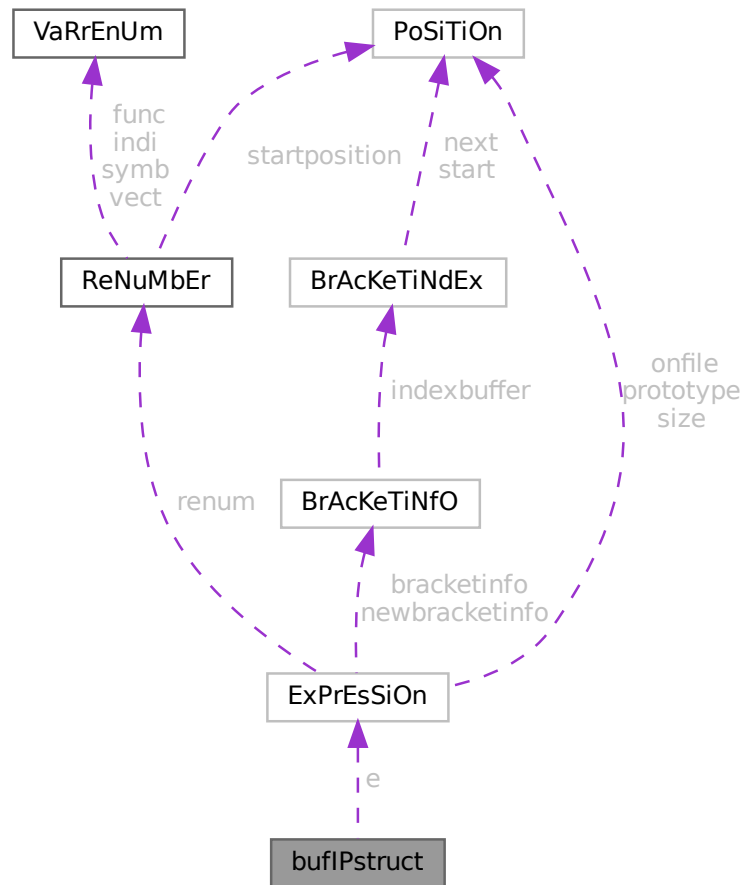

Data Fields

- LONG `i`
- struct `ExPrEsSiOn e`

3.11.1 Detailed Description

Definition at line 3920 of file [parallel.c](#).

3.11.2 Field Documentation

3.11.2.1 `i`

LONG `bufIPstruct::i`

Definition at line 3921 of file [parallel.c](#).

3.11.2.2 e

```
struct ExPrEsSiOn bufIPstruct::e
```

Definition at line 3922 of file [parallel.c](#).


The documentation for this struct was generated from the following file:

- [parallel.c](#)

3.12 C_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for C_const:

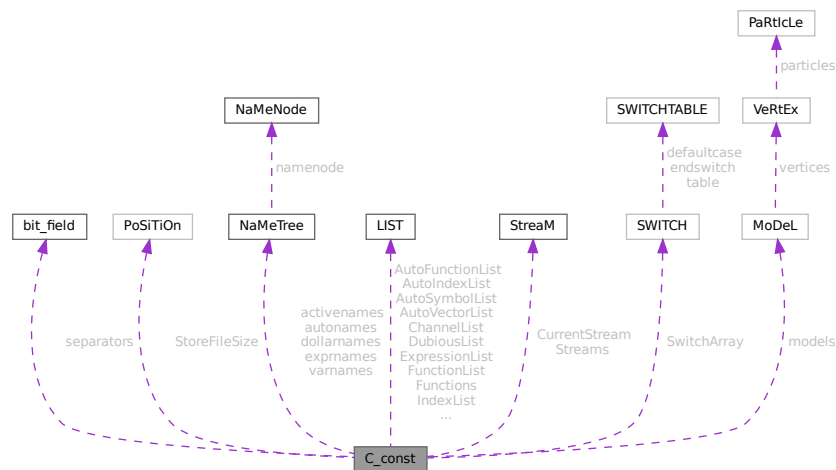

Data Fields

- [set_of_char](#) *separators*
- [POSITION](#) *StoreFileSize*
- [NAMETREE](#) * *dollarnames*
- [NAMETREE](#) * *exprnames*
- [NAMETREE](#) * *varnames*
- [LIST](#) *ChannelList*
- [LIST](#) *DubiousList*
- [LIST](#) *FunctionList*
- [LIST](#) *ExpressionList*
- [LIST](#) *IndexList*
- [LIST](#) *SetElementList*
- [LIST](#) *SetList*
- [LIST](#) *SymbolList*
- [LIST](#) *VectorList*
- [LIST](#) *PotModDolList*

- [LIST ModOptDolList](#)
- [LIST TableBaseList](#)
- [LIST cbufList](#)
- [LIST AutoSymbolList](#)
- [LIST AutoIndexList](#)
- [LIST AutoVectorList](#)
- [LIST AutoFunctionList](#)
- [NAMETREE * autonames](#)
- [LIST * Symbols](#)
- [LIST * Indices](#)
- [LIST * Vectors](#)
- [LIST * Functions](#)
- [NAMETREE ** activenames](#)
- [STREAM * Streams](#)
- [STREAM * CurrentStream](#)
- [SWITCH * SwitchArray](#)
- [MODEL ** models](#)
- [WORD * SwitchHeap](#)
- [LONG * termstack](#)
- [LONG * termsortstack](#)
- [UWORD * cmod](#)
- [UWORD * powmod](#)
- [UWORD * modpowers](#)
- [UWORD * halfmod](#)
- [WORD * ProtoType](#)
- [WORD * WildC](#)
- [LONG * IfHeap](#)
- [LONG * IfCount](#)
- [LONG * IfStack](#)
- [UBYTE * iBuffer](#)
- [UBYTE * iPointer](#)
- [UBYTE * iStop](#)
- [UBYTE ** LabelNames](#)
- [WORD * FixIndices](#)
- [WORD * termsumcheck](#)
- [UBYTE * WildcardNames](#)
- [int * Labels](#)
- [SBYTE * tokens](#)
- [SBYTE * toptokens](#)
- [SBYTE * endoftokens](#)
- [WORD * tokenarglevel](#)
- [UWORD * modinverses](#)
- [UBYTE * Fortran90Kind](#)
- [WORD ** MultiBracketBuf](#)
- [UBYTE * extrasym](#)
- [WORD * doloopstack](#)
- [WORD * doloopnest](#)
- [char * CheckpointRunAfter](#)
- [char * CheckpointRunBefore](#)
- [WORD * IfSumCheck](#)
- [WORD * CommuteInSet](#)
- [UBYTE * TestValue](#)
- [LONG argstack \[MAXNEST\]](#)
- [LONG insidestack \[MAXNEST\]](#)
- [LONG inexprstack \[MAXNEST\]](#)

- LONG [iBufferSize](#)
- LONG [TransEname](#)
- LONG [ProcessBucketSize](#)
- LONG [mProcessBucketSize](#)
- LONG [CModule](#)
- LONG [ThreadBucketSize](#)
- LONG [CheckpointStamp](#)
- LONG [CheckpointInterval](#)
- int [cbufnum](#)
- int [AutoDeclareFlag](#)
- int [NoShowInput](#)
- int [ShortStats](#)
- int [completype](#)
- int [firstconstindex](#)
- int [insidefirst](#)
- int [minsidefirst](#)
- int [wildflag](#)
- int [NumLabels](#)
- int [MaxLabels](#)
- int [IDefDim](#)
- int [IDefDim4](#)
- int [NumWildcardNames](#)
- int [WildcardBufferSize](#)
- int [MaxIf](#)
- int [NumStreams](#)
- int [MaxNumStreams](#)
- int [firstctypemessage](#)
- int [tablecheck](#)
- int [idoption](#)
- int [BottomLevel](#)
- int [CompileLevel](#)
- int [TokensWriteFlag](#)
- int [UnsureDollarMode](#)
- int [outsidefun](#)
- int [funpowers](#)
- int [WarnFlag](#)
- int [StatsFlag](#)
- int [NamesFlag](#)
- int [CodesFlag](#)
- int [SetupFlag](#)
- int [SortType](#)
- int [ISortType](#)
- int [ThreadStats](#)
- int [FinalStats](#)
- int [OldParallelStats](#)
- int [ThreadsFlag](#)
- int [ThreadBalancing](#)
- int [ThreadSortFileSynch](#)
- int [ProcessStats](#)
- int [BracketNormalize](#)
- int [maxtermlevel](#)
- int [dumnumflag](#)
- int [bracketindexflag](#)
- int [parallelflag](#)
- int [mparallelflag](#)

- int [inparallelflag](#)
- int [partodoflag](#)
- int [properorderflag](#)
- int [vetofilling](#)
- int [tablefilling](#)
- int [vetotablebasefill](#)
- int [exprfillwarning](#)
- int [lhdollarflag](#)
- int [NoCompress](#)
- int [IsFortran90](#)
- int [MultiBracketLevels](#)
- int [topolynomialflag](#)
- int [ffbufnum](#)
- int [OldFactArgFlag](#)
- int [MemDebugFlag](#)
- int [OldGCDflag](#)
- int [WTimeStatsFlag](#)
- int [SortReallocateFlag](#)
- int [PrintBacktraceFlag](#)
- int [FlintPolyFlag](#)
- int [HumanStatsFlag](#)
- int [doloopstacksize](#)
- int [dolooplevel](#)
- int [CheckpointFlag](#)
- int [SizeCommutelnSet](#)
- int [origin](#)
- int [vectorlikeLHS](#)
- int [nummodels](#)
- int [modelspace](#)
- int [ModelLevel](#)
- int [ShortStatsMax](#)
- int [InnerTest](#)
- WORD [argsumcheck](#) [MAXNEST]
- WORD [insidesumcheck](#) [MAXNEST]
- WORD [inexprsumcheck](#) [MAXNEST]
- WORD [RepSumCheck](#) [MAXREPEAT]
- WORD [IUniTrace](#) [4]
- WORD [RepLevel](#)
- WORD [arglevel](#)
- WORD [insidelevel](#)
- WORD [inexprlevel](#)
- WORD [termlevel](#)
- WORD [MustTestTable](#)
- WORD [DumNum](#)
- WORD [ncmod](#)
- WORD [npowmod](#)
- WORD [modmode](#)
- WORD [nhalfmod](#)
- WORD [DirtPow](#)
- WORD [IUnitTrace](#)
- WORD [NwildC](#)
- WORD [ComDefer](#)
- WORD [CollectFun](#)
- WORD [AltCollectFun](#)
- WORD [OutputMode](#)

- WORD [Cnumpows](#)
- WORD [OutputSpaces](#)
- WORD [OutNumberType](#)
- WORD [DidClean](#)
- WORD [IfLevel](#)
- WORD [WhileLevel](#)
- WORD [SwitchLevel](#)
- WORD [SwitchInArray](#)
- WORD [MaxSwitch](#)
- WORD [LogHandle](#)
- WORD [LineLength](#)
- WORD [StoreHandle](#)
- WORD [HideLevel](#)
- WORD [IPolyFun](#)
- WORD [IPolyFunInv](#)
- WORD [IPolyFunType](#)
- WORD [IPolyFunExp](#)
- WORD [IPolyFunVar](#)
- WORD [IPolyFunPow](#)
- WORD [SymChangeFlag](#)
- WORD [CollectPercentage](#)
- WORD [extrasymbols](#)
- WORD [PolyRatFunChanged](#)
- WORD [ToBeInFactors](#)
- UBYTE [Commercial](#) [COMMERCIALSIZE+2]
- UBYTE [debugFlags](#) [MAXFLAGS+2]

3.12.1 Detailed Description

The [C_const](#) struct is part of the global data and resides in the [ALLGLOBALS](#) struct A under the name #C. We see it used with the macro AC as in AC.exprnames. It contains variables that involve the compiler and objects set during compilation.

Definition at line [1648](#) of file [structs.h](#).

3.12.2 Field Documentation

3.12.2.1 separators

```
set_of_char C_const::separators
```

Separators in #call and #do

Definition at line [1649](#) of file [structs.h](#).

3.12.2.2 StoreFileSize

```
POSITION C_const::StoreFileSize
```

Definition at line [1650](#) of file [structs.h](#).

3.12.2.3 dollarnames

`NAMETREE*` C_const::dollarnames

[D] Names of dollar variables

Definition at line 1651 of file [structs.h](#).

3.12.2.4 exprnames

`NAMETREE*` C_const::exprnames

[D] Names of expressions

Definition at line 1652 of file [structs.h](#).

3.12.2.5 varnames

`NAMETREE*` C_const::varnames

[D] Names of regular variables

Definition at line 1653 of file [structs.h](#).

3.12.2.6 ChannelList

`LIST` C_const::ChannelList

Used for the #write statement. Contains [CHANNEL](#)

Definition at line 1654 of file [structs.h](#).

3.12.2.7 DubiousList

`LIST` C_const::DubiousList

List of dubious variables. Contains DUBIOUSV. If not empty -> no execution

Definition at line 1656 of file [structs.h](#).

3.12.2.8 FunctionList

`LIST` C_const::FunctionList

List of functions and properties. Contains [FUNCTIONS](#)

Definition at line 1658 of file [structs.h](#).

3.12.2.9 ExpressionList

`LIST C_const::ExpressionList`

List of expressions, locations etc.

Definition at line 1659 of file [structs.h](#).

3.12.2.10 IndexList

`LIST C_const::IndexList`

List of indices

Definition at line 1660 of file [structs.h](#).

3.12.2.11 SetElementList

`LIST C_const::SetElementList`

List of all elements of all sets

Definition at line 1661 of file [structs.h](#).

3.12.2.12 SetList

`LIST C_const::SetList`

List of the sets

Definition at line 1662 of file [structs.h](#).

3.12.2.13 SymbolList

`LIST C_const::SymbolList`

List of the symbols and their properties

Definition at line 1663 of file [structs.h](#).

3.12.2.14 VectorList

`LIST C_const::VectorList`

List of the vectors

Definition at line 1664 of file [structs.h](#).

3.12.2.15 PotModDolList

`LIST C_const::PotModDolList`

Potentially changed dollars

Definition at line 1665 of file [structs.h](#).

3.12.2.16 ModOptDolList

`LIST C_const::ModOptDolList`

Module Option Dollars list

Definition at line 1666 of file [structs.h](#).

3.12.2.17 TableBaseList

`LIST C_const::TableBaseList`

TableBase list

Definition at line 1667 of file [structs.h](#).

3.12.2.18 cbufList

`LIST C_const::cbufList`

List of compiler buffers

Definition at line 1671 of file [structs.h](#).

3.12.2.19 AutoSymbolList

`LIST C_const::AutoSymbolList`

Definition at line 1675 of file [structs.h](#).

3.12.2.20 AutoIndexList

`LIST C_const::AutoIndexList`

Definition at line 1676 of file [structs.h](#).

3.12.2.21 AutoVectorList

`LIST C_const::AutoVectorList`

Definition at line 1677 of file [structs.h](#).

3.12.2.22 AutoFunctionList

`LIST C_const::AutoFunctionList`

Definition at line 1678 of file [structs.h](#).

3.12.2.23 autonames

`NAMETREE* C_const::autonames`

[D] Names in autodeclare

Definition at line 1679 of file [structs.h](#).

3.12.2.24 Symbols

`LIST* C_const::Symbols`

Definition at line 1681 of file [structs.h](#).

3.12.2.25 Indices

`LIST* C_const::Indices`

Definition at line 1683 of file [structs.h](#).

3.12.2.26 Vectors

`LIST* C_const::Vectors`

Definition at line 1684 of file [structs.h](#).

3.12.2.27 Functions

`LIST* C_const::Functions`

Definition at line 1685 of file [structs.h](#).

3.12.2.28 activenames

`NAMETREE** C_const::activenames`

Definition at line 1686 of file [structs.h](#).

3.12.2.29 Streams

`STREAM* C_const::Streams`

(C) Pointer for AutoDeclare statement. Points either to varnames or autonames. [D] The input streams.

Definition at line 1688 of file [structs.h](#).

3.12.2.30 CurrentStream

`STREAM* C_const::CurrentStream`

(C) The current input stream. Streams are: do loop, file, prevariable. points into Streams memory.

Definition at line 1689 of file [structs.h](#).

3.12.2.31 SwitchArray

`SWITCH* C_const::SwitchArray`

Definition at line 1691 of file [structs.h](#).

3.12.2.32 models

`MODEL** C_const::models`

Definition at line 1692 of file [structs.h](#).

3.12.2.33 SwitchHeap

`WORD* C_const::SwitchHeap`

Definition at line 1693 of file [structs.h](#).

3.12.2.34 termstack

`LONG* C_const::termstack`

[D] Last term statement {offset}

Definition at line 1694 of file [structs.h](#).

3.12.2.35 termsortstack

`LONG* C_const::termsortstack`

[D] Last sort statement {offset}

Definition at line 1695 of file [structs.h](#).

3.12.2.36 cmod

UWORD* C_const::cmod

[D] Local setting of modulus. Pointer to value.

Definition at line 1696 of file [structs.h](#).

3.12.2.37 powmod

UWORD* C_const::powmod

Local setting printing as powers. Points into cmod memory

Definition at line 1697 of file [structs.h](#).

3.12.2.38 modpowers

UWORD* C_const::modpowers

[D] The conversion table for mod-> powers.

Definition at line 1698 of file [structs.h](#).

3.12.2.39 halfmod

UWORD* C_const::halfmod

Definition at line 1699 of file [structs.h](#).

3.12.2.40 ProtoType

WORD* C_const::ProtoType

Definition at line 1700 of file [structs.h](#).

3.12.2.41 WildC

WORD* C_const::WildC

Definition at line 1701 of file [structs.h](#).

3.12.2.42 IfHeap

LONG* C_const::IfHeap

[D] Keeps track of where to go in if

Definition at line 1702 of file [structs.h](#).

3.12.2.43 IfCount

```
LONG* C_const::IfCount
```

[D] Keeps track of where to go in if

Definition at line 1703 of file [structs.h](#).

3.12.2.44 IfStack

```
LONG* C_const::IfStack
```

Keeps track of where to go in if. Points into IfHeap-memory

Definition at line 1704 of file [structs.h](#).

3.12.2.45 iBuffer

```
UBYTE* C_const::iBuffer
```

[D] Compiler input buffer

Definition at line 1705 of file [structs.h](#).

3.12.2.46 iPointer

```
UBYTE* C_const::iPointer
```

Running pointer in the compiler input buffer

Definition at line 1706 of file [structs.h](#).

3.12.2.47 iStop

```
UBYTE* C_const::iStop
```

Top of iBuffer

Definition at line 1707 of file [structs.h](#).

3.12.2.48 LabelNames

```
UBYTE** C_const::LabelNames
```

[D] List of names in label statements

Definition at line 1708 of file [structs.h](#).

3.12.2.49 FixIndices

```
WORD* C_const::FixIndices
```

[D] Buffer of fixed indices

Definition at line 1709 of file [structs.h](#).

3.12.2.50 termsumcheck

```
WORD* C_const::termsumcheck
```

[D] Checking of nesting

Definition at line 1710 of file [structs.h](#).

3.12.2.51 WildcardNames

```
UBYTE* C_const::WildcardNames
```

[D] Names of ?a variables

Definition at line 1711 of file [structs.h](#).

3.12.2.52 Labels

```
int* C_const::Labels
```

Label information for during run. Pointer into LabelNames memory.

Definition at line 1712 of file [structs.h](#).

3.12.2.53 tokens

```
SBYTE* C_const::tokens
```

[D] Array with tokens for tokenizer

Definition at line 1713 of file [structs.h](#).

3.12.2.54 toptokens

```
SBYTE* C_const::toptokens
```

Top of tokens

Definition at line 1714 of file [structs.h](#).

3.12.2.55 endoftokens

```
SBYTE* C_const::endoftokens
```

End of the actual tokens

Definition at line 1715 of file [structs.h](#).

3.12.2.56 tokenarglevel

```
WORD* C_const::tokenarglevel
```

[D] Keeps track of function arguments

Definition at line 1716 of file [structs.h](#).

3.12.2.57 modinverses

```
UWORD* C_const::modinverses
```

Definition at line 1717 of file [structs.h](#).

3.12.2.58 Fortran90Kind

```
UBYTE* C_const::Fortran90Kind
```

Definition at line 1718 of file [structs.h](#).

3.12.2.59 MultiBracketBuf

```
WORD** C_const::MultiBracketBuf
```

Definition at line 1719 of file [structs.h](#).

3.12.2.60 extrasym

```
UBYTE* C_const::extrasym
```

Definition at line 1720 of file [structs.h](#).

3.12.2.61 doloopstack

```
WORD* C_const::doloopstack
```

Definition at line 1721 of file [structs.h](#).

3.12.2.62 doloopnest

WORD* C_const::doloopnest

Definition at line 1722 of file [structs.h](#).

3.12.2.63 CheckpointRunAfter

char* C_const::CheckpointRunAfter

[D] Filename of script to be executed *before* creating the snapshot. =0 if no script shall be executed.

Definition at line 1723 of file [structs.h](#).

3.12.2.64 CheckpointRunBefore

char* C_const::CheckpointRunBefore

[D] Filename of script to be executed *after* having created the snapshot. =0 if no script shall be executed.

Definition at line 1725 of file [structs.h](#).

3.12.2.65 IfSumCheck

WORD* C_const::IfSumCheck

[D] Keeps track of if-nesting

Definition at line 1727 of file [structs.h](#).

3.12.2.66 CommuteInSet

WORD* C_const::CommuteInSet

Definition at line 1728 of file [structs.h](#).

3.12.2.67 TestValue

UBYTE* C_const::TestValue

Definition at line 1729 of file [structs.h](#).

3.12.2.68 argstack

LONG C_const::argstack[MAXNEST]

Definition at line 1737 of file [structs.h](#).

3.12.2.69 insidestack

```
LONG C_const::insidestack[MAXNEST]
```

Definition at line 1738 of file [structs.h](#).

3.12.2.70 inexprstack

```
LONG C_const::inexprstack[MAXNEST]
```

Definition at line 1739 of file [structs.h](#).

3.12.2.71 iBufferSize

```
LONG C_const::iBufferSize
```

Definition at line 1740 of file [structs.h](#).

3.12.2.72 TransName

```
LONG C_const::TransName
```

Definition at line 1741 of file [structs.h](#).

3.12.2.73 ProcessBucketSize

```
LONG C_const::ProcessBucketSize
```

Definition at line 1743 of file [structs.h](#).

3.12.2.74 mProcessBucketSize

```
LONG C_const::mProcessBucketSize
```

Definition at line 1744 of file [structs.h](#).

3.12.2.75 CModule

```
LONG C_const::CModule
```

Definition at line 1745 of file [structs.h](#).

3.12.2.76 ThreadBucketSize

```
LONG C_const::ThreadBucketSize
```

Definition at line 1746 of file [structs.h](#).

3.12.2.77 CheckpointStamp

```
LONG C_const::CheckpointStamp
```

Timestamp of the last created snapshot (set to Timer(0)).

Definition at line 1747 of file [structs.h](#).

3.12.2.78 CheckpointInterval

```
LONG C_const::CheckpointInterval
```

Time interval in milliseconds for snapshots. =0 if snapshots shall be created at the end of *every* module.

Definition at line 1748 of file [structs.h](#).

3.12.2.79 cbufnum

```
int C_const::cbufnum
```

Current compiler buffer

Definition at line 1756 of file [structs.h](#).

3.12.2.80 AutoDeclareFlag

```
int C_const::AutoDeclareFlag
```

Definition at line 1757 of file [structs.h](#).

3.12.2.81 NoShowInput

```
int C_const::NoShowInput
```

(C) Mode of looking for names. Set to NOAUTO (=0) or WITHAUTO (=2), cf. AutoDeclare statement

Definition at line 1759 of file [structs.h](#).

3.12.2.82 ShortStats

```
int C_const::ShortStats
```

Definition at line 1760 of file [structs.h](#).

3.12.2.83 compiletype

```
int C_const::compiletype
```

Definition at line 1761 of file [structs.h](#).

3.12.2.84 firstconstindex

```
int C_const::firstconstindex
```

Definition at line 1762 of file [structs.h](#).

3.12.2.85 insidefirst

```
int C_const::insidefirst
```

Definition at line 1763 of file [structs.h](#).

3.12.2.86 minsidefirst

```
int C_const::minsidefirst
```

Definition at line 1764 of file [structs.h](#).

3.12.2.87 wildflag

```
int C_const::wildflag
```

Definition at line 1765 of file [structs.h](#).

3.12.2.88 NumLabels

```
int C_const::NumLabels
```

Definition at line 1766 of file [structs.h](#).

3.12.2.89 MaxLabels

```
int C_const::MaxLabels
```

Definition at line 1767 of file [structs.h](#).

3.12.2.90 IDefDim

```
int C_const::lDefDim
```

Definition at line 1768 of file [structs.h](#).

3.12.2.91 IDefDim4

```
int C_const::lDefDim4
```

Definition at line 1769 of file [structs.h](#).

3.12.2.92 NumWildcardNames

```
int C_const::NumWildcardNames
```

Definition at line 1770 of file [structs.h](#).

3.12.2.93 WildcardBufferSize

```
int C_const::WildcardBufferSize
```

Definition at line 1771 of file [structs.h](#).

3.12.2.94 MaxIf

```
int C_const::MaxIf
```

Definition at line 1772 of file [structs.h](#).

3.12.2.95 NumStreams

```
int C_const::NumStreams
```

Definition at line 1773 of file [structs.h](#).

3.12.2.96 MaxNumStreams

```
int C_const::MaxNumStreams
```

Definition at line 1774 of file [structs.h](#).

3.12.2.97 firstctypemessage

```
int C_const::firstctypemessage
```

Definition at line 1775 of file [structs.h](#).

3.12.2.98 tablecheck

```
int C_const::tablecheck
```

Definition at line 1776 of file [structs.h](#).

3.12.2.99 idoption

```
int C_const::idoption
```

Definition at line 1777 of file [structs.h](#).

3.12.2.100 BottomLevel

```
int C_const::BottomLevel
```

Definition at line 1778 of file [structs.h](#).

3.12.2.101 CompileLevel

```
int C_const::CompileLevel
```

Definition at line 1779 of file [structs.h](#).

3.12.2.102 TokensWriteFlag

```
int C_const::TokensWriteFlag
```

Definition at line 1780 of file [structs.h](#).

3.12.2.103 UnsureDollarMode

```
int C_const::UnsureDollarMode
```

Definition at line 1781 of file [structs.h](#).

3.12.2.104 outsidefun

```
int C_const::outsidefun
```

Definition at line 1782 of file [structs.h](#).

3.12.2.105 funpowers

```
int C_const::funpowers
```

Definition at line 1783 of file [structs.h](#).

3.12.2.106 WarnFlag

```
int C_const::WarnFlag
```

Definition at line 1784 of file [structs.h](#).

3.12.2.107 StatsFlag

```
int C_const::StatsFlag
```

Definition at line 1785 of file [structs.h](#).

3.12.2.108 NamesFlag

```
int C_const::NamesFlag
```

Definition at line 1786 of file [structs.h](#).

3.12.2.109 CodesFlag

```
int C_const::CodesFlag
```

Definition at line 1787 of file [structs.h](#).

3.12.2.110 SetupFlag

```
int C_const::SetupFlag
```

Definition at line 1788 of file [structs.h](#).

3.12.2.111 SortType

```
int C_const::SortType
```

Definition at line 1789 of file [structs.h](#).

3.12.2.112 ISortType

```
int C_const::ISortType
```

Definition at line 1790 of file [structs.h](#).

3.12.2.113 ThreadStats

```
int C_const::ThreadStats
```

Definition at line 1791 of file [structs.h](#).

3.12.2.114 FinalStats

```
int C_const::FinalStats
```

Definition at line 1792 of file [structs.h](#).

3.12.2.115 OldParallelStats

```
int C_const::OldParallelStats
```

Definition at line 1793 of file [structs.h](#).

3.12.2.116 ThreadsFlag

```
int C_const::ThreadsFlag
```

Definition at line 1794 of file [structs.h](#).

3.12.2.117 ThreadBalancing

```
int C_const::ThreadBalancing
```

Definition at line 1795 of file [structs.h](#).

3.12.2.118 ThreadSortFileSynch

```
int C_const::ThreadSortFileSynch
```

Definition at line 1796 of file [structs.h](#).

3.12.2.119 ProcessStats

```
int C_const::ProcessStats
```

Definition at line 1797 of file [structs.h](#).

3.12.2.120 BracketNormalize

```
int C_const::BracketNormalize
```

Definition at line 1798 of file [structs.h](#).

3.12.2.121 maxtermlevel

```
int C_const::maxtermlevel
```

Definition at line 1799 of file [structs.h](#).

3.12.2.122 dumnumflag

```
int C_const::dumnumflag
```

Definition at line 1800 of file [structs.h](#).

3.12.2.123 bracketindexflag

```
int C_const::bracketindexflag
```

Definition at line 1801 of file [structs.h](#).

3.12.2.124 parallelflag

```
int C_const::parallelflag
```

Definition at line 1802 of file [structs.h](#).

3.12.2.125 mparallelflag

```
int C_const::mparallelflag
```

Definition at line 1803 of file [structs.h](#).

3.12.2.126 inparallelflag

```
int C_const::inparallelflag
```

Definition at line 1804 of file [structs.h](#).

3.12.2.127 partodoflag

```
int C_const::partodoflag
```

Definition at line 1805 of file [structs.h](#).

3.12.2.128 properorderflag

```
int C_const::properorderflag
```

Definition at line 1806 of file [structs.h](#).

3.12.2.129 vetofilling

```
int C_const::vetofilling
```

Definition at line 1807 of file [structs.h](#).

3.12.2.130 tablefilling

```
int C_const::tablefilling
```

Definition at line 1808 of file [structs.h](#).

3.12.2.131 vetotablebasefill

```
int C_const::vetotablebasefill
```

Definition at line 1809 of file [structs.h](#).

3.12.2.132 exprfillwarning

```
int C_const::exprfillwarning
```

Definition at line 1810 of file [structs.h](#).

3.12.2.133 lhdollarflag

```
int C_const::lhdollarflag
```

Definition at line 1811 of file [structs.h](#).

3.12.2.134 NoCompress

```
int C_const::NoCompress
```

Definition at line 1812 of file [structs.h](#).

3.12.2.135 IsFortran90

```
int C_const::IsFortran90
```

Definition at line 1813 of file [structs.h](#).

3.12.2.136 MultiBracketLevels

```
int C_const::MultiBracketLevels
```

Definition at line 1814 of file [structs.h](#).

3.12.2.137 topolynomialflag

```
int C_const::topolynomialflag
```

Definition at line 1815 of file [structs.h](#).

3.12.2.138 ffbufnum

```
int C_const::ffbufnum
```

Definition at line 1816 of file [structs.h](#).

3.12.2.139 OldFactArgFlag

```
int C_const::OldFactArgFlag
```

Definition at line 1817 of file [structs.h](#).

3.12.2.140 MemDebugFlag

```
int C_const::MemDebugFlag
```

Definition at line 1818 of file [structs.h](#).

3.12.2.141 OldGCDflag

```
int C_const::OldGCDflag
```

Definition at line 1819 of file [structs.h](#).

3.12.2.142 WTimeStatsFlag

```
int C_const::WTimeStatsFlag
```

Definition at line 1820 of file [structs.h](#).

3.12.2.143 SortReallocateFlag

```
int C_const::SortReallocateFlag
```

Definition at line 1821 of file [structs.h](#).

3.12.2.144 PrintBacktraceFlag

```
int C_const::PrintBacktraceFlag
```

Definition at line 1825 of file [structs.h](#).

3.12.2.145 FlintPolyFlag

```
int C_const::FlintPolyFlag
```

Definition at line 1826 of file [structs.h](#).

3.12.2.146 HumanStatsFlag

```
int C_const::HumanStatsFlag
```

Definition at line 1827 of file [structs.h](#).

3.12.2.147 doloopstacksize

```
int C_const::doloopstacksize
```

Definition at line 1828 of file [structs.h](#).

3.12.2.148 dolooplevel

```
int C_const::dolooplevel
```

Definition at line 1829 of file [structs.h](#).

3.12.2.149 CheckpointFlag

```
int C_const::CheckpointFlag
```

Tells preprocessor whether checkpoint code must executed. -1 : do recovery from snapshot, set by command line option; 0 : do nothing; 1 : create snapshots, set by On checkpoint statement

Definition at line 1830 of file [structs.h](#).

3.12.2.150 SizeCommuteInSet

```
int C_const::SizeCommuteInSet
```

Definition at line 1834 of file [structs.h](#).

3.12.2.151 origin

```
int C_const::origin
```

Definition at line 1839 of file [structs.h](#).

3.12.2.152 vectorlikeLHS

```
int C_const::vectorlikeLHS
```

Definition at line 1840 of file [structs.h](#).

3.12.2.153 nummodels

```
int C_const::nummodels
```

Definition at line 1841 of file [structs.h](#).

3.12.2.154 modelspace

```
int C_const::modelspace
```

Definition at line 1842 of file [structs.h](#).

3.12.2.155 ModelLevel

```
int C_const::ModelLevel
```

Definition at line 1843 of file [structs.h](#).

3.12.2.156 ShortStatsMax

```
int C_const::ShortStatsMax
```

Definition at line 1844 of file [structs.h](#).

3.12.2.157 InnerTest

```
int C_const::InnerTest
```

Definition at line 1845 of file [structs.h](#).

3.12.2.158 argsumcheck

```
WORD C_const::argsumcheck[MAXNEST]
```

Definition at line 1846 of file [structs.h](#).

3.12.2.159 insidesumcheck

```
WORD C_const::insidesumcheck[MAXNEST]
```

Definition at line 1847 of file [structs.h](#).

3.12.2.160 inexprsumcheck

```
WORD C_const::inexprsumcheck[MAXNEST]
```

Definition at line 1848 of file [structs.h](#).

3.12.2.161 RepSumCheck

```
WORD C_const::RepSumCheck[MAXREPEAT]
```

Definition at line 1849 of file [structs.h](#).

3.12.2.162 lUniTrace

```
WORD C_const::lUniTrace[4]
```

Definition at line 1850 of file [structs.h](#).

3.12.2.163 RepLevel

WORD C_const::RepLevel

Definition at line 1851 of file [structs.h](#).

3.12.2.164 arglevel

WORD C_const::arglevel

Definition at line 1852 of file [structs.h](#).

3.12.2.165 insidelevel

WORD C_const::insidelevel

Definition at line 1853 of file [structs.h](#).

3.12.2.166 inexprlevel

WORD C_const::inexprlevel

Definition at line 1854 of file [structs.h](#).

3.12.2.167 termlevel

WORD C_const::termlevel

Definition at line 1855 of file [structs.h](#).

3.12.2.168 MustTestTable

WORD C_const::MustTestTable

Definition at line 1856 of file [structs.h](#).

3.12.2.169 DumNum

WORD C_const::DumNum

Definition at line 1857 of file [structs.h](#).

3.12.2.170 ncmmod

WORD C_const::ncmod

Definition at line 1858 of file [structs.h](#).

3.12.2.171 npowmod

WORD C_const::npowmod

Definition at line 1859 of file [structs.h](#).

3.12.2.172 modmode

WORD C_const::modmode

Definition at line 1860 of file [structs.h](#).

3.12.2.173 nhalfmod

WORD C_const::nhalfmod

Definition at line 1861 of file [structs.h](#).

3.12.2.174 DirtPow

WORD C_const::DirtPow

Definition at line 1862 of file [structs.h](#).

3.12.2.175 lUnitTrace

WORD C_const::lUnitTrace

Definition at line 1863 of file [structs.h](#).

3.12.2.176 NwildC

WORD C_const::NwildC

Definition at line 1864 of file [structs.h](#).

3.12.2.177 ComDefer

WORD C_const::ComDefer

Definition at line 1865 of file [structs.h](#).

3.12.2.178 CollectFun

WORD C_const::CollectFun

Definition at line 1866 of file [structs.h](#).

3.12.2.179 AltCollectFun

WORD C_const::AltCollectFun

Definition at line 1867 of file [structs.h](#).

3.12.2.180 OutputMode

WORD C_const::OutputMode

Definition at line 1868 of file [structs.h](#).

3.12.2.181 Cnumpows

WORD C_const::Cnumpows

Definition at line 1869 of file [structs.h](#).

3.12.2.182 OutputSpaces

WORD C_const::OutputSpaces

Definition at line 1870 of file [structs.h](#).

3.12.2.183 OutNumberType

WORD C_const::OutNumberType

Definition at line 1871 of file [structs.h](#).

3.12.2.184 DidClean

WORD C_const::DidClean

Definition at line 1872 of file [structs.h](#).

3.12.2.185 IfLevel

WORD C_const::IfLevel

Definition at line 1873 of file [structs.h](#).

3.12.2.186 WhileLevel

WORD C_const::WhileLevel

Definition at line 1874 of file [structs.h](#).

3.12.2.187 SwitchLevel

WORD C_const::SwitchLevel

Definition at line 1875 of file [structs.h](#).

3.12.2.188 SwitchInArray

WORD C_const::SwitchInArray

Definition at line 1876 of file [structs.h](#).

3.12.2.189 MaxSwitch

WORD C_const::MaxSwitch

Definition at line 1877 of file [structs.h](#).

3.12.2.190 LogHandle

WORD C_const::LogHandle

Definition at line 1878 of file [structs.h](#).

3.12.2.191 LineLength

WORD C_const::LineLength

Definition at line 1879 of file [structs.h](#).

3.12.2.192 StoreHandle

WORD C_const::StoreHandle

Definition at line 1880 of file [structs.h](#).

3.12.2.193 HideLevel

WORD C_const::HideLevel

Definition at line 1881 of file [structs.h](#).

3.12.2.194 lPolyFun

WORD C_const::lPolyFun

Definition at line 1882 of file [structs.h](#).

3.12.2.195 IPolyFunInv

WORD C_const::lPolyFunInv

Definition at line 1883 of file [structs.h](#).

3.12.2.196 IPolyFunType

WORD C_const::lPolyFunType

Definition at line 1884 of file [structs.h](#).

3.12.2.197 IPolyFunExp

WORD C_const::lPolyFunExp

Definition at line 1885 of file [structs.h](#).

3.12.2.198 IPolyFunVar

WORD C_const::lPolyFunVar

Definition at line 1886 of file [structs.h](#).

3.12.2.199 IPolyFunPow

WORD C_const::lPolyFunPow

Definition at line 1887 of file [structs.h](#).

3.12.2.200 SymChangeFlag

WORD C_const::SymChangeFlag

Definition at line 1888 of file [structs.h](#).

3.12.2.201 CollectPercentage

WORD C_const::CollectPercentage

Definition at line 1889 of file [structs.h](#).

3.12.2.202 extrasymbols

WORD C_const::extrasymbols

Definition at line 1890 of file [structs.h](#).

3.12.2.203 PolyRatFunChanged

```
WORD C_const::PolyRatFunChanged
```

Definition at line [1891](#) of file [structs.h](#).

3.12.2.204 ToBeInFactors

```
WORD C_const::ToBeInFactors
```

Definition at line [1892](#) of file [structs.h](#).

3.12.2.205 Commercial

```
UBYTE C_const::Commercial[COMMERCIALSIZE+2]
```

Definition at line [1896](#) of file [structs.h](#).

3.12.2.206 debugFlags

```
UBYTE C_const::debugFlags[MAXFLAGS+2]
```

Definition at line [1897](#) of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.13 CbUf Struct Reference

```
#include <structs.h>
```

Collaboration diagram for CbUf:



Data Fields

- WORD * [Buffer](#)
- WORD * [Top](#)
- WORD * [Pointer](#)
- WORD ** [lhs](#)
- WORD ** [rhs](#)
- LONG * [CanCommu](#)
- LONG * [NumTerms](#)
- WORD * [numdum](#)
- WORD * [dimension](#)
- COMPTREE * [boomlijst](#)
- LONG [BufferSize](#)
- int [numlhs](#)
- int [numrhs](#)
- int [maxlhs](#)
- int [maxrhs](#)
- int [mnumlhs](#)
- int [mnumrhs](#)
- int [numtree](#)
- int [rootnum](#)
- int [MaxTreeSize](#)

3.13.1 Detailed Description

The CBUF struct is used by the compiler. It is a compiler buffer of which since version 3.0 there can be many.

Definition at line [971](#) of file [structs.h](#).

3.13.2 Field Documentation**3.13.2.1 Buffer**

```
WORD* CbUf::Buffer
```

[D] Size in BufferSize

Definition at line [972](#) of file [structs.h](#).

Referenced by [CleanupArgCache\(\)](#), [clearcbuf\(\)](#), [DoubleCbuffer\(\)](#), [finishcbuf\(\)](#), [inicbufs\(\)](#), [PF_BroadcastCBuf\(\)](#), and [Processor\(\)](#).

3.13.2.2 Top

```
WORD* CbUf::Top
```

pointer to the end of the Buffer memory

Definition at line [973](#) of file [structs.h](#).

Referenced by [AddNtoC\(\)](#), [AddNtoL\(\)](#), [DoubleCbuffer\(\)](#), [finishcbuf\(\)](#), [inicbufs\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.3 Pointer

```
WORD* CbUf::Pointer
```

pointer into the Buffer memory

Definition at line 974 of file [structs.h](#).

Referenced by [AddLHS\(\)](#), [AddNtoC\(\)](#), [AddNtoL\(\)](#), [AddRHS\(\)](#), [CleanupArgCache\(\)](#), [clearcbuf\(\)](#), [DoubleCbuffer\(\)](#), [finishcbuf\(\)](#), [Generator\(\)](#), [inicbufs\(\)](#), [PF_BroadcastCBuf\(\)](#), and [Processor\(\)](#).

3.13.2.4 lhs

```
WORD** CbUf::lhs
```

[D] Size in maxlhs. list of pointers into Buffer.

Definition at line 975 of file [structs.h](#).

Referenced by [AddLHS\(\)](#), [DoubleCbuffer\(\)](#), [finishcbuf\(\)](#), [Generator\(\)](#), [inicbufs\(\)](#), [PF_BroadcastCBuf\(\)](#), [Processor\(\)](#), and [TestMatch\(\)](#).

3.13.2.5 rhs

```
WORD** CbUf::rhs
```

[D] Size in maxrhs. list of pointers into Buffer.

Definition at line 976 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), [CleanupArgCache\(\)](#), [clearcbuf\(\)](#), [DoubleCbuffer\(\)](#), [finishcbuf\(\)](#), [Generator\(\)](#), [inicbufs\(\)](#), [IniFbuffer\(\)](#), [PF_BroadcastCBuf\(\)](#), and [Processor\(\)](#).

3.13.2.6 CanCommu

```
LONG* CbUf::CanCommu
```

points into rhs memory behind WORD* area.

Definition at line 977 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), [finishcbuf\(\)](#), [inicbufs\(\)](#), [IniFbuffer\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.7 NumTerms

```
LONG* CbUf::NumTerms
```

points into rhs memory behind CanCommu area

Definition at line 978 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), [finishcbuf\(\)](#), [inicbufs\(\)](#), [IniFbuffer\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.8 numdum

```
WORD* CbUf::numdum
```

points into rhs memory behind NumTerms

Definition at line 979 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), [inicbufs\(\)](#), [IniFbuffer\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.9 dimension

```
WORD* CbUf::dimension
```

points into rhs memory behind numdum

Definition at line 980 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), [inicbufs\(\)](#), [IniFbuffer\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.10 boomlijst

```
COMPTREE* CbUf::boomlijst
```

[D] Number elements in MaxTreeSize

Definition at line 981 of file [structs.h](#).

Referenced by [CleanupArgCache\(\)](#), [clearcbuf\(\)](#), [finishcbuf\(\)](#), [inicbufs\(\)](#), [IniFbuffer\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.11 BufferSize

```
LONG CbUf::BufferSize
```

Number of allocated WORD's in Buffer

Definition at line 982 of file [structs.h](#).

Referenced by [DoubleCbuffer\(\)](#), [finishcbuf\(\)](#), [inicbufs\(\)](#), and [PF_BroadcastCBuf\(\)](#).

3.13.2.12 numlhs

```
int CbUf::numlhs
```

Definition at line 983 of file [structs.h](#).

3.13.2.13 numrhs

```
int CbUf::numrhs
```

Definition at line 984 of file [structs.h](#).

3.13.2.14 maxlhs

```
int CbUf::maxlhs
```

Definition at line 985 of file [structs.h](#).

3.13.2.15 maxrhs

```
int CbUf::maxrhs
```

Definition at line 986 of file [structs.h](#).

3.13.2.16 mnumlhs

```
int CbUf::mnumlhs
```

Definition at line 987 of file [structs.h](#).

3.13.2.17 mnumrhs

```
int CbUf::mnumrhs
```

Definition at line 988 of file [structs.h](#).

3.13.2.18 numtree

```
int CbUf::numtree
```

Definition at line 989 of file [structs.h](#).

3.13.2.19 rootnum

```
int CbUf::rootnum
```

Definition at line 990 of file [structs.h](#).

3.13.2.20 MaxTreeSize

```
int CbUf::MaxTreeSize
```

Definition at line 991 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.14 ChAnNeL Struct Reference

```
#include <structs.h>
```

Data Fields

- char * [name](#)
- int [handle](#)

3.14.1 Detailed Description

When we read input from text files we have to remember not only their handle but also their name. This is needed for error messages. Hence we call such a file a channel and reserve a struct of type [CHANNEL](#) to allow to lay this link.

Definition at line [1001](#) of file [structs.h](#).

3.14.2 Field Documentation

3.14.2.1 name

```
char* ChAnNeL::name
```

[D] Name of the channel

Definition at line [1002](#) of file [structs.h](#).

3.14.2.2 handle

```
int ChAnNeL::handle
```

File handle

Definition at line [1003](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.15 COST Struct Reference

Data Fields

- LONG [add](#)
- LONG [mul](#)
- LONG [div](#)
- LONG [pow](#)

3.15.1 Detailed Description

Definition at line [1261](#) of file [structs.h](#).

3.15.2 Field Documentation

3.15.2.1 add

```
LONG COST::add
```

Definition at line [1262](#) of file [structs.h](#).

3.15.2.2 mul

```
LONG COST::mul
```

Definition at line [1263](#) of file [structs.h](#).

3.15.2.3 div

```
LONG COST::div
```

Definition at line [1264](#) of file [structs.h](#).

3.15.2.4 pow

```
LONG COST::pow
```

Definition at line [1265](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.16 CSEEq Struct Reference

Public Member Functions

- bool [operator\(\)](#) (const vector< WORD > &lhs, const vector< WORD > &rhs) const

3.16.1 Detailed Description

Definition at line [1059](#) of file [optimize.cc](#).

3.16.2 Member Function Documentation

3.16.2.1 operator()

```
bool CSEEq::operator() (
    const vector< WORD > & lhs,
    const vector< WORD > & rhs ) const [inline]
```

Definition at line 1060 of file [optimize.cc](#).

The documentation for this struct was generated from the following file:

- [optimize.cc](#)

3.17 CSEHash Struct Reference

Public Member Functions

- `size_t operator()` (const vector< WORD > &n) const

3.17.1 Detailed Description

Definition at line 1053 of file [optimize.cc](#).

3.17.2 Member Function Documentation

3.17.2.1 operator()

```
size_t CSEHash::operator() (
    const vector< WORD > & n ) const [inline]
```


Definition at line 1054 of file [optimize.cc](#).

The documentation for this struct was generated from the following file:

- [optimize.cc](#)

3.18 dbase Struct Reference

Collaboration diagram for dbase:

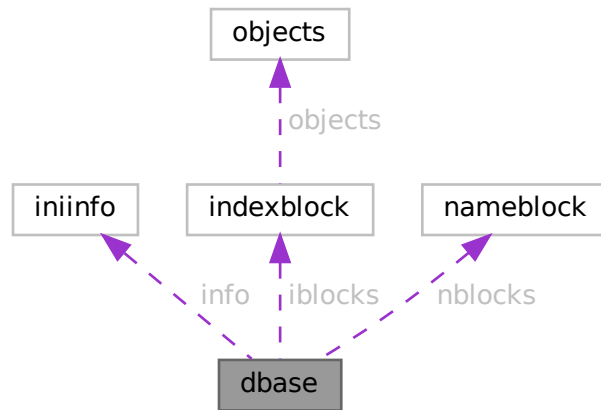

Data Fields

- `INIINFO` `info`
- `MLONG` `mode`
- `MLONG` `tablenameessize`
- `MLONG` `topnumber`
- `MLONG` `tablenameefill`
- `MLONG` `rwmode`
- `INDEXBLOCK` `** iblocks`
- `NAMESBLOCK` `** nblocks`
- `FILE` `* handle`
- `char *` `name`
- `char *` `fullname`
- `char *` `tablenamees`

3.18.1 Detailed Description

Definition at line 123 of file `minos.h`.

3.18.2 Field Documentation

3.18.2.1 `info`

`INIINFO` `dbase::info`

Definition at line 124 of file `minos.h`.

3.18.2.2 mode

MLONG dbase::mode

Definition at line 125 of file [minos.h](#).

3.18.2.3 tablenamessize

MLONG dbase::tablenamessize

Definition at line 126 of file [minos.h](#).

3.18.2.4 topnumber

MLONG dbase::topnumber

Definition at line 127 of file [minos.h](#).

3.18.2.5 tablenameefill

MLONG dbase::tablenameefill

Definition at line 128 of file [minos.h](#).

3.18.2.6 rwmode

MLONG dbase::rwmode

Definition at line 129 of file [minos.h](#).

3.18.2.7 iblocks

INDEXBLOCK** dbase::iblocks

Definition at line 130 of file [minos.h](#).

3.18.2.8 nblocks

NAMESBLOCK** dbase::nblocks

Definition at line 131 of file [minos.h](#).

3.18.2.9 handle

FILE* dbase::handle

Definition at line 132 of file [minos.h](#).

3.18.2.10 name

```
char* dbase::name
```

Definition at line 133 of file [minos.h](#).

3.18.2.11 fullname

```
char* dbase::fullname
```

Definition at line 134 of file [minos.h](#).

3.18.2.12 tablenames

```
char* dbase::tablenames
```


Definition at line 135 of file [minos.h](#).

The documentation for this struct was generated from the following file:

- [minos.h](#)

3.19 DGraph Struct Reference

Collaboration diagram for DGraph:



Data Fields

- int [nnodes](#)
- int [nedges](#)
- [DNode](#) * [nodes](#)
- [DEdge](#) * [edges](#)

3.19.1 Detailed Description

Definition at line 255 of file [grccparam.h](#).

3.19.2 Field Documentation

3.19.2.1 nnodes

```
int DGraph::nnodes
```

Definition at line 256 of file [grccparam.h](#).

3.19.2.2 nedges

```
int DGraph::nedges
```

Definition at line 257 of file [grccparam.h](#).

3.19.2.3 nodes

```
DNode* DGraph::nodes
```

Definition at line 258 of file [grccparam.h](#).

3.19.2.4 edges

```
DEdge* DGraph::edges
```


Definition at line 259 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.20 DICTIONARY Struct Reference

Collaboration diagram for DICTIONARY:



Data Fields

- [DICTIONARY_ELEMENT](#) ** [elements](#)
- UBYTE * [name](#)
- int [sizeelements](#)
- int [numelements](#)
- int [numbers](#)
- int [variables](#)
- int [characters](#)
- int [funwith](#)
- int [gnumelements](#)
- int [ranges](#)

3.20.1 Detailed Description

Definition at line [1326](#) of file [structs.h](#).

3.20.2 Field Documentation

3.20.2.1 elements

```
DICTIONARY_ELEMENT** DICTIONARY::elements
```

Definition at line [1327](#) of file [structs.h](#).

3.20.2.2 name

```
UBYTE* DICTIONARY::name
```

Definition at line [1328](#) of file [structs.h](#).

3.20.2.3 sizeelements

```
int DICTIONARY::sizeelements
```

Definition at line [1329](#) of file [structs.h](#).

3.20.2.4 numelements

```
int DICTIONARY::numelements
```

Definition at line [1330](#) of file [structs.h](#).

3.20.2.5 numbers

```
int DICTIONARY::numbers
```

Definition at line [1331](#) of file [structs.h](#).

3.20.2.6 variables

```
int DICTIONARY::variables
```

Definition at line 1332 of file [structs.h](#).

3.20.2.7 characters

```
int DICTIONARY::characters
```

Definition at line 1333 of file [structs.h](#).

3.20.2.8 funwith

```
int DICTIONARY::funwith
```

Definition at line 1334 of file [structs.h](#).

3.20.2.9 gnumelements

```
int DICTIONARY::gnumelements
```

Definition at line 1335 of file [structs.h](#).

3.20.2.10 ranges

```
int DICTIONARY::ranges
```

Definition at line 1336 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.21 `DICTIONARY_ELEMENT` Struct Reference

Data Fields

- WORD * [lhs](#)
- WORD * [rhs](#)
- int [type](#)
- int [size](#)

3.21.1 Detailed Description

Definition at line 1319 of file [structs.h](#).

3.21.2 Field Documentation

3.21.2.1 lhs

```
WORD* DICTIONARY_ELEMENT::lhs
```

Definition at line 1320 of file [structs.h](#).

3.21.2.2 rhs

```
WORD* DICTIONARY_ELEMENT::rhs
```

Definition at line 1321 of file [structs.h](#).

3.21.2.3 type

```
int DICTIONARY_ELEMENT::type
```

Definition at line 1322 of file [structs.h](#).

3.21.2.4 size

```
int DICTIONARY_ELEMENT::size
```

Definition at line 1323 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.22 DiStRiBuTe Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [obj1](#)
- WORD * [obj2](#)
- WORD * [out](#)
- WORD [sign](#)
- WORD [n1](#)
- WORD [n2](#)
- WORD [n](#)
- WORD [cycle](#) [MAXMATCH]

3.22.1 Detailed Description

The struct DISTRIBUTE is used to help the pattern matcher when matching antisymmetric tensors.

Definition at line [1080](#) of file [structs.h](#).

3.22.2 Field Documentation

3.22.2.1 obj1

```
WORD* DiStRiBuTe::obj1
```

Definition at line [1081](#) of file [structs.h](#).

3.22.2.2 obj2

```
WORD* DiStRiBuTe::obj2
```

Definition at line [1082](#) of file [structs.h](#).

3.22.2.3 out

```
WORD* DiStRiBuTe::out
```

Definition at line [1083](#) of file [structs.h](#).

3.22.2.4 sign

```
WORD DiStRiBuTe::sign
```

Definition at line [1084](#) of file [structs.h](#).

3.22.2.5 n1

```
WORD DiStRiBuTe::n1
```

Definition at line [1085](#) of file [structs.h](#).

3.22.2.6 n2

```
WORD DiStRiBuTe::n2
```

Definition at line [1086](#) of file [structs.h](#).

3.22.2.7 n

```
WORD DiStRiBuTe::n
```

Definition at line 1087 of file [structs.h](#).

3.22.2.8 cycle

```
WORD DiStRiBuTe::cycle[MAXMATCH]
```

Definition at line 1088 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.23 DNode Struct Reference

Data Fields

- int [extloop](#)
- int [intrct](#)

3.23.1 Detailed Description

Definition at line 248 of file [grccparam.h](#).

3.23.2 Field Documentation

3.23.2.1 extloop

```
int DNode::extloop
```

Definition at line 249 of file [grccparam.h](#).

3.23.2.2 intrct

```
int DNode::intrct
```

Definition at line 250 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.24 dollar_buf Struct Reference

3.24.1 Detailed Description


Definition at line 2479 of file [parallel.c](#).

The documentation for this struct was generated from the following file:

- [parallel.c](#)

3.25 DoLIaRS Struct Reference

Collaboration diagram for DoLIaRS:



Data Fields

- WORD * [where](#)
- [FACDOLLAR](#) * [factors](#)
- LONG [size](#)
- LONG [name](#)
- WORD [type](#)
- WORD [node](#)
- WORD [index](#)
- WORD [zero](#)
- WORD [numdummies](#)
- WORD [nfactors](#)

3.25.1 Detailed Description

Definition at line 541 of file [structs.h](#).

3.25.2 Field Documentation

3.25.2.1 where

WORD* DoLLArS::where

Definition at line 542 of file [structs.h](#).

3.25.2.2 factors

FACDOLLAR* DoLLArS::factors

Definition at line 543 of file [structs.h](#).

3.25.2.3 size

LONG DoLLArS::size

Definition at line 548 of file [structs.h](#).

3.25.2.4 name

LONG DoLLArS::name

Definition at line 549 of file [structs.h](#).

3.25.2.5 type

WORD DoLLArS::type

Definition at line 550 of file [structs.h](#).

3.25.2.6 node

WORD DoLLArS::node

Definition at line 551 of file [structs.h](#).

3.25.2.7 index

WORD DoLLArS::index

Definition at line 552 of file [structs.h](#).

3.25.2.8 zero

```
WORD DoLlArS::zero
```

Definition at line 553 of file [structs.h](#).

3.25.2.9 numdummies

```
WORD DoLlArS::numdummies
```

Definition at line 554 of file [structs.h](#).

3.25.2.10 nfactors

```
WORD DoLlArS::nfactors
```

Definition at line 555 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.26 DoLoOp Struct Reference

```
#include <structs.h>
```

Collaboration diagram for DoLoOp:



Data Fields

- [PRELOAD](#) [p](#)
- UBYTE * [name](#)
- UBYTE * [vars](#)
- UBYTE * [contents](#)
- UBYTE * [dollaname](#)
- LONG [startlinenumber](#)
- LONG [firstnum](#)
- LONG [lastnum](#)
- LONG [incnum](#)
- int [type](#)
- int [NoShowInput](#)
- int [errorsinloop](#)
- int [firstloopcall](#)
- WORD [firstdollar](#)
- WORD [lastdollar](#)
- WORD [incdollar](#)
- WORD [NumPreTypes](#)
- WORD [PrefLevel](#)
- WORD [PreSwitchLevel](#)

3.26.1 Detailed Description

Each preprocessor do loop has a struct of type DOLOOP to keep track of all relevant parameters like where the beginning of the loop is, what the boundaries, increment and value of the loop parameter are, etc. Also we keep the whole loop inside a buffer of type [PRELOAD](#)

Definition at line [877](#) of file [structs.h](#).

3.26.2 Field Documentation

3.26.2.1 [p](#)

[PRELOAD](#) [DoLoOp](#)::[p](#)

size, name and buffer

Definition at line [878](#) of file [structs.h](#).

3.26.2.2 [name](#)

UBYTE* [DoLoOp](#)::[name](#)

pointer into [PRELOAD](#) buffer

Definition at line [879](#) of file [structs.h](#).

3.26.2.3 vars

```
UBYTE* DoLoOp::vars
```

Definition at line 880 of file [structs.h](#).

3.26.2.4 contents

```
UBYTE* DoLoOp::contents
```

Definition at line 881 of file [structs.h](#).

3.26.2.5 dollaname

```
UBYTE* DoLoOp::dollarname
```

For loop over terms in expression. Allocated with Malloc1()

Definition at line 882 of file [structs.h](#).

3.26.2.6 startlinenumber

```
LONG DoLoOp::startlinenumber
```

Definition at line 883 of file [structs.h](#).

3.26.2.7 firstnum

```
LONG DoLoOp::firstnum
```

Definition at line 884 of file [structs.h](#).

3.26.2.8 lastnum

```
LONG DoLoOp::lastnum
```

Definition at line 885 of file [structs.h](#).

3.26.2.9 incnum

```
LONG DoLoOp::incnum
```

Definition at line 886 of file [structs.h](#).

3.26.2.10 type

```
int DoLoOp::type
```

Definition at line 887 of file [structs.h](#).

3.26.2.11 NoShowInput

```
int DoLoOp::NoShowInput
```

Definition at line 888 of file [structs.h](#).

3.26.2.12 errorsinloop

```
int DoLoOp::errorsinloop
```

Definition at line 889 of file [structs.h](#).

3.26.2.13 firstloopcall

```
int DoLoOp::firstloopcall
```

Definition at line 890 of file [structs.h](#).

3.26.2.14 firstdollar

```
WORD DoLoOp::firstdollar
```

Definition at line 891 of file [structs.h](#).

3.26.2.15 lastdollar

```
WORD DoLoOp::lastdollar
```

Definition at line 892 of file [structs.h](#).

3.26.2.16 incdollar

```
WORD DoLoOp::incdollar
```

Definition at line 893 of file [structs.h](#).

3.26.2.17 NumPreTypes

```
WORD DoLoOp::NumPreTypes
```

Definition at line 894 of file [structs.h](#).

3.26.2.18 PreIfLevel

WORD DoLoOp::PreIfLevel

Definition at line 895 of file [structs.h](#).

3.26.2.19 PreSwitchLevel

WORD DoLoOp::PreSwitchLevel

Definition at line 896 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.27 DuBiOuS Struct Reference

Data Fields

- LONG [name](#)
- WORD [node](#)
- WORD [dummy](#)

3.27.1 Detailed Description

Definition at line 528 of file [structs.h](#).

3.27.2 Field Documentation

3.27.2.1 name

LONG DuBiOuS::name

Definition at line 529 of file [structs.h](#).

3.27.2.2 node

WORD DuBiOuS::node

Definition at line 530 of file [structs.h](#).

3.27.2.3 dummy

WORD DuBiOuS::dummy

Definition at line 531 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.28 ECand Class Reference

Public Member Functions

- [ECand](#) (int dt, int nplist, int *plst)
- void [prECand](#) (const char *msg)

Data Fields

- Bool [det](#)
- int [nplist](#)
- int [plist](#) [GRCC_MAXMPARTICLES2]

3.28.1 Detailed Description

Definition at line 1124 of file [grcc.h](#).

3.28.2 Constructor & Destructor Documentation

3.28.2.1 ECand()

```
ECand::ECand (
    int dt,
    int nplist,
    int * plst )
```

Definition at line 8185 of file [grcc.cc](#).

3.28.2.2 ~ECand()

```
ECand::~~ECand (
    void )
```

Definition at line 8205 of file [grcc.cc](#).

Public Member Functions

- [EEdge](#) ([EGraph](#) *egrph, int nedges, int nloops)
- void [copy](#) ([EEdge](#) *ee)
- void [setId](#) ([EGraph](#) *egrph, const int eid)
- void [print](#) (void)
- void [setType](#) (int typ)
- void [setLMom](#) (int k, int dir)
- void [setEMom](#) (int nedges, int *extn, int dir)

Data Fields

- [EGraph](#) * [egraph](#)
- int [id](#)
- int [ext](#)
- int [ptcl](#)
- int [deleted](#)
- int [nodes](#) [2]
- int [nlegs](#) [2]
- int * [emom](#)
- int * [lmom](#)
- int * [extMom](#)
- ULong [momset](#)
- int [momdir](#)
- Bool [cut](#)
- int [visited](#)
- int [conid](#)
- int [edtype](#)
- int [opicomp](#)
- int [dir](#)
- int [DUMMY_PADDING](#)

3.29.1 Detailed Description

Definition at line [562](#) of file [grcc.h](#).

3.29.2 Constructor & Destructor Documentation

3.29.2.1 EEdge() [1/2]

```
EEdge::EEdge (
    void )
```

Definition at line [6142](#) of file [grcc.cc](#).

3.29.2.2 EEdge() [2/2]

```
EEdge::EEdge (
    EGraph * egrph,
    int nedges,
    int nloops )
```

Definition at line [6164](#) of file [grcc.cc](#).

3.29.2.3 ~EEdge()

```
EEdge::~~EEdge (
    void )
```

Definition at line [6183](#) of file [grcc.cc](#).

3.29.3 Member Function Documentation

3.29.3.1 copy()

```
void EEdge::copy (
    EEdge * ee )
```

Definition at line [6194](#) of file [grcc.cc](#).

3.29.3.2 setId()

```
void EEdge::setId (
    EGraph * egrph,
    const int eid )
```

Definition at line [6206](#) of file [grcc.cc](#).

3.29.3.3 print()

```
void EEdge::print (
    void )
```

Definition at line [6242](#) of file [grcc.cc](#).

3.29.3.4 setType()

```
void EEdge::setType (
    int typ )
```

Definition at line [6213](#) of file [grcc.cc](#).

3.29.3.5 setLMom()

```
void EEdge::setLMom (
    int k,
    int dir )
```

Definition at line [6236](#) of file [grcc.cc](#).

3.29.3.6 setEMom()

```
void EEdge::setEMom (
    int nedges,
    int * extn,
    int dir )
```

Definition at line [6224](#) of file [grcc.cc](#).

3.29.4 Field Documentation

3.29.4.1 egraph

```
EGraph* EEdge::egraph
```

Definition at line [565](#) of file [grcc.h](#).

3.29.4.2 id

```
int EEdge::id
```

Definition at line [567](#) of file [grcc.h](#).

3.29.4.3 ext

```
int EEdge::ext
```

Definition at line [568](#) of file [grcc.h](#).

3.29.4.4 ptcl

```
int EEdge::ptcl
```

Definition at line [569](#) of file [grcc.h](#).

3.29.4.5 deleted

```
int EEdge::deleted
```

Definition at line [570](#) of file [grcc.h](#).

3.29.4.6 nodes

```
int EEdge::nodes[2]
```

Definition at line [571](#) of file [grcc.h](#).

3.29.4.7 nlegs

```
int EEdge::nlegs[2]
```

Definition at line 572 of file [grcc.h](#).

3.29.4.8 emom

```
int* EEdge::emom
```

Definition at line 575 of file [grcc.h](#).

3.29.4.9 lmom

```
int* EEdge::lmom
```

Definition at line 576 of file [grcc.h](#).

3.29.4.10 extMom

```
int* EEdge::extMom
```

Definition at line 577 of file [grcc.h](#).

3.29.4.11 momset

```
ULong EEdge::momset
```

Definition at line 580 of file [grcc.h](#).

3.29.4.12 momdir

```
int EEdge::momdir
```

Definition at line 581 of file [grcc.h](#).

3.29.4.13 cut

```
Bool EEdge::cut
```

Definition at line 583 of file [grcc.h](#).

3.29.4.14 visited

```
int EEdge::visited
```

Definition at line 584 of file [grcc.h](#).

3.29.4.15 conid

```
int EEdge::conid
```

Definition at line 585 of file [grcc.h](#).

3.29.4.16 edtype

```
int EEdge::edtype
```

Definition at line 586 of file [grcc.h](#).

3.29.4.17 opicomp

```
int EEdge::opicomp
```

Definition at line 587 of file [grcc.h](#).

3.29.4.18 dir

```
int EEdge::dir
```

Definition at line 588 of file [grcc.h](#).

3.29.4.19 DUMMYPADDING

```
int EEdge::DUMMYPADDING
```

Definition at line 590 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.30 EFLine Class Reference

Public Member Functions

- void [print](#) (const char *msg)

Data Fields

- int [elist](#) [GRCC_MAXNODES]
- FLType [ftype](#)
- int [fkind](#)
- int [nlist](#)

3.30.1 Detailed Description

Definition at line 612 of file [grcc.h](#).

3.30.2 Constructor & Destructor Documentation

3.30.2.1 EFLine()

```
EFLine::EFLine (  
    void )
```

Definition at line 6293 of file [grcc.cc](#).

3.30.3 Member Function Documentation

3.30.3.1 print()

```
void EFLine::print (  
    const char * msg )
```

Definition at line 6301 of file [grcc.cc](#).

3.30.4 Field Documentation

3.30.4.1 elist

```
int EFLine::elist[GRCC_MAXNODES]
```

Definition at line 614 of file [grcc.h](#).

3.30.4.2 ftype

```
FLType EFLine::ftype
```

Definition at line 615 of file [grcc.h](#).

3.30.4.3 fkind

```
int EFLine::fkind
```

Definition at line 616 of file [grcc.h](#).

- int [findRoot](#) (void)
- int [dirEdge](#) (int n, int e)
- void [extMomConsv](#) (void)
- int [cmpMom](#) (int *lm0, int *em0, int *lm1, int *em1)
- int [groupLMom](#) (int *grp, int *ed2gr)
- void [chkMomConsv](#) (void)
- void [prFLines](#) (void)
- void [getFLines](#) (void)
- int [fltrace](#) (int fk, int nd0, int *fl)
- void [addFLine](#) (const FLType ft, int fk, int nfl, int *fl)
- int [legParticle](#) (int ed, int lg)

Data Fields

- [Options](#) * [opt](#)
- [Model](#) * [model](#)
- [Process](#) * [proc](#)
- [SProcess](#) * [sproc](#)
- [MGraph](#) * [mgraph](#)
- [MConn](#) * [econn](#)
- [ENode](#) ** [nodes](#)
- [EEdge](#) ** [edges](#)
- [BigInt](#) [mld](#)
- [BigInt](#) [ald](#)
- [BigInt](#) [sld](#)
- [BigInt](#) [gSubld](#)
- [Bool](#) [assigned](#)
- int [fsign](#)
- [BigInt](#) [nsym](#)
- [BigInt](#) [esym](#)
- [BigInt](#) [nsym1](#)
- [BigInt](#) [extperm](#)
- [BigInt](#) [multp](#)
- int [pld](#)
- int [sNodes](#)
- int [sEdges](#)
- int [sMaxdeg](#)
- int [sLoops](#)
- int [nNodes](#)
- int [nEdges](#)
- int [nExtern](#)
- int [maxdeg](#)
- int [nLoops](#)
- int [totalc](#)
- int [nopicomp](#)
- int [opi2plp](#)
- int [nopi2p](#)
- int [nadj2ptv](#)
- int [DUMMY_PADDING](#)
- int * [bidef](#)
- int * [bilow](#)
- int * [extMom](#)
- int [bconn](#)
- int [bicount](#)

- int [loopm](#)
- int [opiCount](#)
- [EFLine](#) * [flines](#) [GRCC_MAXFLINES]
- int [nFlines](#)
- int [DUMMYPADDING1](#)

3.31.1 Detailed Description

Definition at line [624](#) of file [grcc.h](#).

3.31.2 Constructor & Destructor Documentation

3.31.2.1 EGraph()

```
EGraph::EGraph (
    int nnodes,
    int nedges,
    int mxdeg )
```

Definition at line [6326](#) of file [grcc.cc](#).

3.31.2.2 ~EGraph()

```
EGraph::~EGraph (
    void )
```

Definition at line [6386](#) of file [grcc.cc](#).

3.31.3 Member Function Documentation

3.31.3.1 copy()

```
void EGraph::copy (
    EGraph * eg )
```

Definition at line [6417](#) of file [grcc.cc](#).

3.31.3.2 print()

```
void EGraph::print (
    void )
```

Definition at line [6816](#) of file [grcc.cc](#).

3.31.3.3 printPy()

```
void EGraph::printPy (
    FILE * fp,
    long mId )
```

Definition at line 6882 of file [grcc.cc](#).

3.31.3.4 fromDGraph()

```
void EGraph::fromDGraph (
    DGraph * dg )
```

Definition at line 6481 of file [grcc.cc](#).

3.31.3.5 fromMGraph()

```
void EGraph::fromMGraph (
    MGraph * mgraph )
```

Definition at line 6587 of file [grcc.cc](#).

3.31.3.6 optQGrafM()

```
Bool EGraph::optQGrafM (
    Options * opt )
```

Definition at line 7043 of file [grcc.cc](#).

3.31.3.7 optQGrafA()

```
Bool EGraph::optQGrafA (
    Options * opt )
```

Definition at line 7262 of file [grcc.cc](#).

3.31.3.8 isOptE()

```
Bool EGraph::isOptE (
    void )
```

Definition at line 7287 of file [grcc.cc](#).

3.31.3.9 setExtern()

```
ENode * EGraph::setExtern (
    int n0,
    int pt,
    int ndtp )
```

Definition at line 6769 of file [grcc.cc](#).

3.31.3.10 isExternal()

```
Bool EGraph::isExternal (
    int nd ) [inline]
```

Definition at line 700 of file [grcc.h](#).

3.31.3.11 isFermion()

```
int EGraph::isFermion (
    int nd )
```

Definition at line 7904 of file [grcc.cc](#).

3.31.3.12 setExtLoop()

```
void EGraph::setExtLoop (
    int nd,
    int val )
```

Definition at line 6459 of file [grcc.cc](#).

3.31.3.13 endSetExtLoop()

```
void EGraph::endSetExtLoop (
    void )
```

Definition at line 6466 of file [grcc.cc](#).

3.31.3.14 connComp()

```
int EGraph::connComp (
    void )
```

Definition at line 7439 of file [grcc.cc](#).

3.31.3.15 connVisit()

```
int EGraph::connVisit (
    int nd,
    int ncc )
```

Definition at line 7471 of file [grcc.cc](#).

3.31.3.16 biconnE()

```
void EGraph::biconnE (
    void )
```

Definition at line 7492 of file [grcc.cc](#).

3.31.3.17 biinitE()

```
void EGraph::biinitE (
    void )
```

Definition at line 7556 of file [grcc.cc](#).

3.31.3.18 bisearchE()

```
void EGraph::bisearchE (
    int nd,
    int * extlst,
    int * intlst,
    int * opiext,
    int * opiloop )
```

Definition at line 7592 of file [grcc.cc](#).

3.31.3.19 findRoot()

```
int EGraph::findRoot (
    void )
```

Definition at line 7390 of file [grcc.cc](#).

3.31.3.20 dirEdge()

```
int EGraph::dirEdge (
    int n,
    int e )
```

Definition at line 6950 of file [grcc.cc](#).

3.31.3.21 extMomConsv()

```
void EGraph::extMomConsv (
    void )
```

Definition at line 7797 of file [grcc.cc](#).

3.31.3.22 cmpMom()

```
int EGraph::cmpMom (
    int * lm0,
    int * em0,
    int * lm1,
    int * em1 )
```

Definition at line 6960 of file [grcc.cc](#).

3.31.3.23 groupLMom()

```
int EGraph::groupLMom (
    int * grp,
    int * ed2gr )
```

Definition at line 7010 of file [grcc.cc](#).

3.31.3.24 chkMomConsv()

```
void EGraph::chkMomConsv (
    void )
```

Definition at line 7825 of file [grcc.cc](#).

3.31.3.25 prFLines()

```
void EGraph::prFLines (
    void )
```

Definition at line 6937 of file [grcc.cc](#).

3.31.3.26 getFLines()

```
void EGraph::getFLines (
    void )
```

Definition at line 8021 of file [grcc.cc](#).

3.31.3.27 fltrace()

```
int EGraph::fltrace (
    int fk,
    int nd0,
    int * fl )
```

Definition at line 7918 of file [grcc.cc](#).

3.31.3.28 addFLine()

```
void EGraph::addFLine (
    const FLType ft,
    int fk,
    int nfl,
    int * fl )
```

Definition at line 8115 of file [grcc.cc](#).

3.31.3.29 legParticle()

```
int EGraph::legParticle (
    int ed,
    int lg )
```

Definition at line 7896 of file [grcc.cc](#).

3.31.4 Field Documentation

3.31.4.1 opt

[Options*](#) EGraph::opt

Definition at line 626 of file [grcc.h](#).

3.31.4.2 model

[Model*](#) EGraph::model

Definition at line 627 of file [grcc.h](#).

3.31.4.3 proc

[Process*](#) EGraph::proc

Definition at line 628 of file [grcc.h](#).

3.31.4.4 sproc

[SProcess*](#) EGraph::sproc

Definition at line 629 of file [grcc.h](#).

3.31.4.5 mgraph

[MGraph*](#) EGraph::mgraph

Definition at line 630 of file [grcc.h](#).

3.31.4.6 econn

[MConn*](#) EGraph::econn

Definition at line 631 of file [grcc.h](#).

3.31.4.7 nodes

`ENode** EGraph::nodes`

Definition at line 633 of file [grcc.h](#).

3.31.4.8 edges

`EEdge** EGraph::edges`

Definition at line 634 of file [grcc.h](#).

3.31.4.9 mId

`BigInt EGraph::mId`

Definition at line 636 of file [grcc.h](#).

3.31.4.10 aId

`BigInt EGraph::aId`

Definition at line 637 of file [grcc.h](#).

3.31.4.11 sId

`BigInt EGraph::sId`

Definition at line 638 of file [grcc.h](#).

3.31.4.12 gSubId

`BigInt EGraph::gSubId`

Definition at line 639 of file [grcc.h](#).

3.31.4.13 assigned

`Bool EGraph::assigned`

Definition at line 640 of file [grcc.h](#).

3.31.4.14 fsign

`int EGraph::fsign`

Definition at line 642 of file [grcc.h](#).

3.31.4.15 nsym

`BigInt EGraph::nsym`

Definition at line 643 of file [grcc.h](#).

3.31.4.16 esym

`BigInt EGraph::esym`

Definition at line 643 of file [grcc.h](#).

3.31.4.17 nsym1

`BigInt EGraph::nsym1`

Definition at line 644 of file [grcc.h](#).

3.31.4.18 extperm

`BigInt EGraph::extperm`

Definition at line 645 of file [grcc.h](#).

3.31.4.19 multp

`BigInt EGraph::multp`

Definition at line 646 of file [grcc.h](#).

3.31.4.20 pld

`int EGraph::pId`

Definition at line 648 of file [grcc.h](#).

3.31.4.21 sNodes

`int EGraph::sNodes`

Definition at line 650 of file [grcc.h](#).

3.31.4.22 sEdges

`int EGraph::sEdges`

Definition at line 651 of file [grcc.h](#).

3.31.4.23 sMaxdeg

```
int EGraph::sMaxdeg
```

Definition at line 652 of file [grcc.h](#).

3.31.4.24 sLoops

```
int EGraph::sLoops
```

Definition at line 653 of file [grcc.h](#).

3.31.4.25 nNodes

```
int EGraph::nNodes
```

Definition at line 655 of file [grcc.h](#).

3.31.4.26 nEdges

```
int EGraph::nEdges
```

Definition at line 656 of file [grcc.h](#).

3.31.4.27 nExtern

```
int EGraph::nExtern
```

Definition at line 657 of file [grcc.h](#).

3.31.4.28 maxdeg

```
int EGraph::maxdeg
```

Definition at line 658 of file [grcc.h](#).

3.31.4.29 nLoops

```
int EGraph::nLoops
```

Definition at line 659 of file [grcc.h](#).

3.31.4.30 totalc

```
int EGraph::totalc
```

Definition at line 660 of file [grcc.h](#).

3.31.4.31 nopicomp

```
int EGraph::nopicomp
```

Definition at line 663 of file [grcc.h](#).

3.31.4.32 opi2plp

```
int EGraph::opi2plp
```

Definition at line 664 of file [grcc.h](#).

3.31.4.33 nopi2p

```
int EGraph::nopi2p
```

Definition at line 665 of file [grcc.h](#).

3.31.4.34 nadj2ptv

```
int EGraph::nadj2ptv
```

Definition at line 666 of file [grcc.h](#).

3.31.4.35 DUMMY_PADDING

```
int EGraph::DUMMY_PADDING
```

Definition at line 668 of file [grcc.h](#).

3.31.4.36 bidef

```
int* EGraph::bidef
```

Definition at line 670 of file [grcc.h](#).

3.31.4.37 bilow

```
int* EGraph::bilow
```

Definition at line 671 of file [grcc.h](#).

3.31.4.38 extMom

```
int* EGraph::extMom
```

Definition at line 672 of file [grcc.h](#).

3.31.4.39 bconn

```
int EGraph::bconn
```

Definition at line 673 of file [grcc.h](#).

3.31.4.40 bicount

```
int EGraph::bicount
```

Definition at line 674 of file [grcc.h](#).

3.31.4.41 loopm

```
int EGraph::loopm
```

Definition at line 675 of file [grcc.h](#).

3.31.4.42 opiCount

```
int EGraph::opiCount
```

Definition at line 676 of file [grcc.h](#).

3.31.4.43 flines

```
EFlines* EGraph::flines[GRCC_MAXFLINES]
```

Definition at line 679 of file [grcc.h](#).

3.31.4.44 nFlines

```
int EGraph::nFlines
```

Definition at line 680 of file [grcc.h](#).

3.31.4.45 DUMMY_PADDING1

```
int EGraph::DUMMY_PADDING1
```

Definition at line 682 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.32.2 Constructor & Destructor Documentation

3.32.2.1 ENode() [1/2]

```
ENode::ENode (  
    void )
```

Definition at line 6022 of file [grcc.cc](#).

3.32.2.2 ENode() [2/2]

```
ENode::ENode (  
    EGraph * egrph,  
    int loops,  
    int sdeg )
```

Definition at line 6038 of file [grcc.cc](#).

3.32.2.3 ~ENode()

```
ENode::~ENode (  
    void )
```

Definition at line 6058 of file [grcc.cc](#).

3.32.3 Member Function Documentation

3.32.3.1 initAss()

```
void ENode::initAss (  
    EGraph * egrph,  
    int nid,  
    int sdg )
```

Definition at line 6082 of file [grcc.cc](#).

3.32.3.2 setId()

```
void ENode::setId (  
    EGraph * egrph,  
    const int nid )
```

Definition at line 6090 of file [grcc.cc](#).

3.32.3.3 copy()

```
void ENode::copy (  
    ENode * en )
```

Definition at line 6069 of file [grcc.cc](#).

3.32.3.4 setExtern()

```
void ENode::setExtern (
    int typ,
    int pt )
```

Definition at line 6097 of file [grcc.cc](#).

3.32.3.5 setType()

```
void ENode::setType (
    int typ )
```

Definition at line 6110 of file [grcc.cc](#).

3.32.3.6 print()

```
void ENode::print (
    void )
```

Definition at line 6123 of file [grcc.cc](#).

3.32.4 Field Documentation

3.32.4.1 egraph

```
EGraph* ENode::egraph
```

Definition at line 530 of file [grcc.h](#).

3.32.4.2 edges

```
int* ENode::edges
```

Definition at line 531 of file [grcc.h](#).

3.32.4.3 id

```
int ENode::id
```

Definition at line 534 of file [grcc.h](#).

3.32.4.4 maxdeg

```
int ENode::maxdeg
```

Definition at line 535 of file [grcc.h](#).

3.32.4.5 deg

```
int ENode::deg
```

Definition at line 536 of file [grcc.h](#).

3.32.4.6 extloop

```
int ENode::extloop
```

Definition at line 537 of file [grcc.h](#).

3.32.4.7 ndtype

```
int ENode::ndtype
```

Definition at line 538 of file [grcc.h](#).

3.32.4.8 intrct

```
int ENode::intrct
```

Definition at line 539 of file [grcc.h](#).

3.32.4.9 klow

```
int* ENode::klow
```

Definition at line 542 of file [grcc.h](#).

3.32.4.10 visited

```
int ENode::visited
```

Definition at line 543 of file [grcc.h](#).

3.32.4.11 DUMMYPADDING

```
int ENode::DUMMYPADDING
```

Definition at line 545 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.33 EStack Class Reference

Public Member Functions

- void [print](#) (const char *msg)

Data Fields

- int [edgen](#)
- int [det](#)
- int [nplist](#)
- int [plist](#) [GRCC_MAXMPARTICLES2]

3.33.1 Detailed Description

Definition at line [1350](#) of file [grcc.h](#).

3.33.2 Constructor & Destructor Documentation

3.33.2.1 EStack()

```
EStack::EStack ( ) [inline]
```

Definition at line [1359](#) of file [grcc.h](#).

3.33.2.2 ~EStack()

```
EStack::~~EStack ( ) [inline]
```

Definition at line [1360](#) of file [grcc.h](#).

3.33.3 Member Function Documentation

3.33.3.1 print()

```
void EStack::print (
    const char * msg )
```

Definition at line [10231](#) of file [grcc.cc](#).

3.33.4 Field Documentation

3.33.4.1 edgen

```
int EStack::edgen
```

Definition at line [1354](#) of file [grcc.h](#).

3.33.4.2 det

```
int EStack::det
```

Definition at line 1355 of file [grcc.h](#).

3.33.4.3 nplist

```
int EStack::nplist
```

Definition at line 1356 of file [grcc.h](#).

3.33.4.4 plist

```
int EStack::plist[GRCC_MAXMPARTICLES2]
```


Definition at line 1357 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.34 ExPrEsSiOn Struct Reference

Collaboration diagram for ExPrEsSiOn:

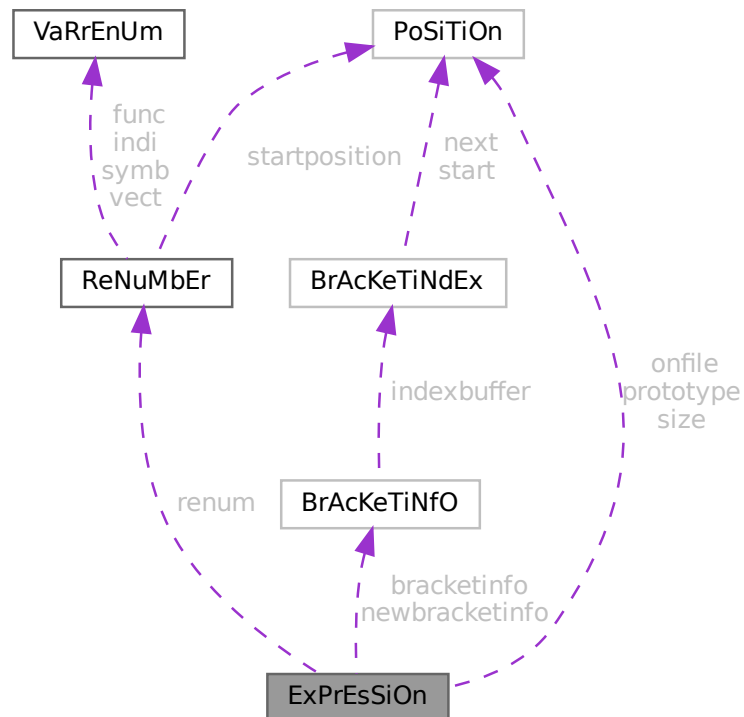

Data Fields

- [POSITION onfile](#)
- [POSITION prototype](#)
- [POSITION size](#)
- [RENUMBER renum](#)
- [BRACKETINFO * bracketinfo](#)
- [BRACKETINFO * newbracketinfo](#)
- [WORD * renumlists](#)
- [WORD * inmem](#)
- [LONG counter](#)
- [LONG name](#)
- [WORD hidelevel](#)
- [WORD vflags](#)
- [WORD printflag](#)
- [WORD status](#)
- [WORD replace](#)
- [WORD node](#)
- [WORD whichbuffer](#)
- [WORD namesize](#)
- [WORD compression](#)
- [WORD numdummies](#)
- [WORD numfactors](#)
- [WORD sizeprototype](#)
- [WORD uflags](#)

3.34.1 Detailed Description

Definition at line [382](#) of file [structs.h](#).

3.34.2 Field Documentation

3.34.2.1 onfile

[POSITION](#) ExPrEsSiOn::onfile

Definition at line [383](#) of file [structs.h](#).

3.34.2.2 prototype

[POSITION](#) ExPrEsSiOn::prototype

Definition at line [384](#) of file [structs.h](#).

3.34.2.3 size

[POSITION](#) ExPrEsSiOn::size

Definition at line [385](#) of file [structs.h](#).

3.34.2.4 renum

`RENUMBER ExPrEsSiOn::renum`

Definition at line 386 of file [structs.h](#).

3.34.2.5 bracketinfo

`BRACKETINFO* ExPrEsSiOn::bracketinfo`

Definition at line 387 of file [structs.h](#).

3.34.2.6 newbracketinfo

`BRACKETINFO* ExPrEsSiOn::newbracketinfo`

Definition at line 388 of file [structs.h](#).

3.34.2.7 renumlists

`WORD* ExPrEsSiOn::renumlists`

Allocated only for threaded version if variables exist, else points to AN.dummyrenumlist

Definition at line 389 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.34.2.8 inmem

`WORD* ExPrEsSiOn::inmem`

Definition at line 391 of file [structs.h](#).

3.34.2.9 counter

`LONG ExPrEsSiOn::counter`

Definition at line 392 of file [structs.h](#).

3.34.2.10 name

`LONG ExPrEsSiOn::name`

Definition at line 393 of file [structs.h](#).

3.34.2.11 hidelevel

WORD ExPrEsSiOn::hidelevel

Definition at line 394 of file [structs.h](#).

3.34.2.12 vflags

WORD ExPrEsSiOn::vflags

Definition at line 395 of file [structs.h](#).

3.34.2.13 printflag

WORD ExPrEsSiOn::printflag

Definition at line 396 of file [structs.h](#).

3.34.2.14 status

WORD ExPrEsSiOn::status

Definition at line 397 of file [structs.h](#).

3.34.2.15 replace

WORD ExPrEsSiOn::replace

Definition at line 398 of file [structs.h](#).

3.34.2.16 node

WORD ExPrEsSiOn::node

Definition at line 399 of file [structs.h](#).

3.34.2.17 whichbuffer

WORD ExPrEsSiOn::whichbuffer

Definition at line 400 of file [structs.h](#).

3.34.2.18 namesize

WORD ExPrEsSiOn::namesize

Definition at line 401 of file [structs.h](#).

3.34.2.19 compression

WORD ExPrEsSiOn::compression

Definition at line 402 of file [structs.h](#).

3.34.2.20 numdummies

WORD ExPrEsSiOn::numdummies

Definition at line 403 of file [structs.h](#).

3.34.2.21 numfactors

WORD ExPrEsSiOn::numfactors

Definition at line 404 of file [structs.h](#).

3.34.2.22 sizeprototype

WORD ExPrEsSiOn::sizeprototype

Definition at line 405 of file [structs.h](#).

3.34.2.23 uflags

WORD ExPrEsSiOn::uflags

Definition at line 406 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.35 FaCdOILaR Struct Reference

Data Fields

- WORD * [where](#)
- LONG [size](#)
- WORD [type](#)
- WORD [value](#)

3.35.1 Detailed Description

Definition at line 534 of file [structs.h](#).

3.35.2 Field Documentation

3.35.2.1 where

WORD* FaCdOlLaR::where

Definition at line 535 of file [structs.h](#).

3.35.2.2 size

LONG FaCdOlLaR::size

Definition at line 536 of file [structs.h](#).

3.35.2.3 type

WORD FaCdOlLaR::type

Definition at line 537 of file [structs.h](#).

3.35.2.4 value

WORD FaCdOlLaR::value

Definition at line 538 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.36 factorized_poly Class Reference

Public Member Functions

- void [add_factor](#) (const [poly](#) &f, int p=1)
- const std::string [tostring](#) () const

Data Fields

- std::vector< [poly](#) > [factor](#)
- std::vector< int > [power](#)

Friends

- std::ostream & [operator](#)<< (std::ostream &out, const [poly](#) &p)

3.36.1 Detailed Description

Definition at line 54 of file [polyfact.h](#).

3.36.2 Member Function Documentation

3.36.2.1 `add_factor()`

```
void factorized_poly::add_factor (
    const poly & f,
    int p = 1 )
```

Definition at line 125 of file [polyfact.cc](#).

3.36.2.2 `tostring()`

```
const string factorized_poly::tostring ( ) const
```

Definition at line 59 of file [polyfact.cc](#).

3.36.3 Field Documentation

3.36.3.1 `factor`

```
std::vector<poly> factorized_poly::factor
```

Definition at line 59 of file [polyfact.h](#).

3.36.3.2 `power`

```
std::vector<int> factorized_poly::power
```

Definition at line 60 of file [polyfact.h](#).

The documentation for this class was generated from the following files:

- [polyfact.h](#)
- [polyfact.cc](#)

3.37 FGInput Struct Reference

Data Fields

- long [ninitl](#)
- const char * [initln](#) [GRCC_MAXNODES]
- int [initlc](#) [GRCC_MAXNODES]
- long [nfinal](#)
- const char * [finaln](#) [GRCC_MAXNODES]
- int [finalc](#) [GRCC_MAXNODES]
- int [coupl](#) [GRCC_MAXNCPLG]

3.37.1 Detailed Description

Definition at line 221 of file [grccparam.h](#).

3.37.2 Field Documentation

3.37.2.1 ninitl

```
long FGInput::ninitl
```

Definition at line 222 of file [grccparam.h](#).

3.37.2.2 initln

```
const char* FGInput::initln[GRCC_MAXNODES]
```

Definition at line 223 of file [grccparam.h](#).

3.37.2.3 initlc

```
int FGInput::initlc[GRCC_MAXNODES]
```

Definition at line 224 of file [grccparam.h](#).

3.37.2.4 nfinal

```
long FGInput::nfinal
```

Definition at line 225 of file [grccparam.h](#).

3.37.2.5 finaln

```
const char* FGInput::finaln[GRCC_MAXNODES]
```

Definition at line 226 of file [grccparam.h](#).

3.37.2.6 finalc

```
int FGInput::finalc[GRCC_MAXNODES]
```

Definition at line 227 of file [grccparam.h](#).

3.37.2.7 coupl

```
int FGInput::coupl[GRCC_MAXNCPLG]
```

Definition at line 228 of file [grccparam.h](#).


The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.38 FiLe Struct Reference

```
#include <structs.h>
```

Collaboration diagram for FiLe:



Data Fields

- [POSITION](#) [POposition](#)
- [POSITION](#) [filesize](#)
- [WORD](#) * [PObuffer](#)
- [WORD](#) * [POstop](#)
- [WORD](#) * [POfill](#)
- [WORD](#) * [POfull](#)
- [char](#) * [name](#)
- [ULONG](#) [numblocks](#)
- [ULONG](#) [inbuffer](#)
- [LONG](#) [POsize](#)
- [int](#) [handle](#)
- [int](#) [active](#)

3.38.1 Detailed Description

The type FILEHANDLE is the struct that controls all relevant information of a file, whether it is open or not. The file may even not yet exist. There is a system of caches (PObuffer) and as long as the information to be written still fits inside the cache the file may never be created. There are variables that can store information about different types of files, like scratch files or sort files. Depending on what is available in the system we may also have information about gzip compression (currently sort file only) or locks (TFORM).

Definition at line 682 of file [structs.h](#).

3.38.2 Field Documentation

3.38.2.1 PPosition

`POSITION FiLe::PPosition`

Definition at line 683 of file [structs.h](#).

3.38.2.2 filesize

`POSITION FiLe::filesize`

Definition at line 684 of file [structs.h](#).

3.38.2.3 PObuffer

`WORD* FiLe::PObuffer`

Definition at line 685 of file [structs.h](#).

3.38.2.4 PStop

`WORD* FiLe::PStop`

Definition at line 686 of file [structs.h](#).

3.38.2.5 POfill

`WORD* FiLe::POfill`

Definition at line 687 of file [structs.h](#).

3.38.2.6 POfull

`WORD* FiLe::POfull`

Definition at line 688 of file [structs.h](#).

3.38.2.7 name

```
char* FiLe::name
```

Definition at line 695 of file [structs.h](#).

3.38.2.8 numblocks

```
ULONG FiLe::numblocks
```

Definition at line 700 of file [structs.h](#).

3.38.2.9 inbuffer

```
ULONG FiLe::inbuffer
```

Definition at line 701 of file [structs.h](#).

3.38.2.10 PSize

```
LONG FiLe::PSize
```

Definition at line 702 of file [structs.h](#).

3.38.2.11 handle

```
int FiLe::handle
```

Our own handle. Equal -1 if no file exists.

Definition at line 710 of file [structs.h](#).

Referenced by [DoOnePow\(\)](#), [FlushOut\(\)](#), [GetFirstTerm\(\)](#), [MergePatches\(\)](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [PutIn\(\)](#), [PutOut\(\)](#), [Sflush\(\)](#), and [StageSort\(\)](#).

3.38.2.12 active

```
int FiLe::active
```


Definition at line 711 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.39 FiLeDaTa Struct Reference

Collaboration diagram for FiLeDaTa:

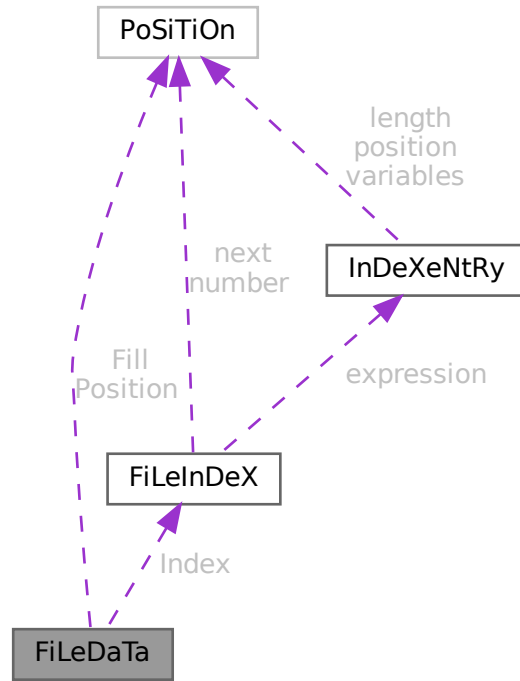

Data Fields

- [FILEINDEX](#) Index
- [POSITION](#) Fill
- [POSITION](#) Position
- [WORD](#) Handle
- [WORD](#) dirtyflag

3.39.1 Detailed Description

Definition at line 150 of file [structs.h](#).

3.39.2 Field Documentation

3.39.2.1 Index

[FILEINDEX](#) `FiLeDaTa::Index`

Definition at line 151 of file [structs.h](#).

3.39.2.2 Fill

```
POSITION FileDaTa::Fill
```

Definition at line 152 of file [structs.h](#).

3.39.2.3 Position

```
POSITION FileDaTa::Position
```

Definition at line 153 of file [structs.h](#).

3.39.2.4 Handle

```
WORD FileDaTa::Handle
```

Definition at line 154 of file [structs.h](#).

3.39.2.5 dirtyflag

```
WORD FileDaTa::dirtyflag
```

Definition at line 155 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.40 FiLeInDeX Struct Reference

```
#include <structs.h>
```

Collaboration diagram for FiLeInDeX:

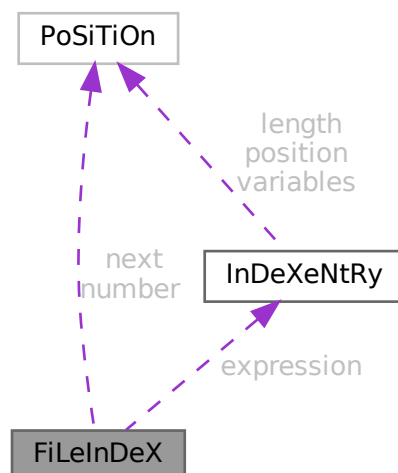

Data Fields

- [POSITION](#) [next](#)
- [POSITION](#) [number](#)
- [INDEXENTRY](#) [expression](#) [[INFILEINDEX](#)]
- [SBYTE](#) [empty](#) [[EMPTYININDEX](#)]

3.40.1 Detailed Description

Defines the structure of a file index in store-files and save-files.

It contains several entries (see struct [InDeXeNtRy](#)) up to a maximum of [INFILEINDEX](#).

The variable number has been made of type [POSITION](#) to avoid padding problems with some types of computers/↔ OS and keep system independence of the .sav files.

This struct is always 512 bytes long.

Definition at line [137](#) of file [structs.h](#).

3.40.2 Field Documentation

3.40.2.1 next

[POSITION](#) [FiLeInDeX::next](#)

Position of next [FILEINDEX](#) if any

Definition at line [138](#) of file [structs.h](#).

Referenced by [ReadSaveIndex\(\)](#).

3.40.2.2 number

[POSITION](#) [FiLeInDeX::number](#)

Number of used entries in this index

Definition at line [139](#) of file [structs.h](#).

Referenced by [ReadSaveIndex\(\)](#).

3.40.2.3 expression

[INDEXENTRY](#) [FiLeInDeX::expression](#) [[INFILEINDEX](#)]

File index entries

Definition at line [140](#) of file [structs.h](#).

3.40.2.4 empty

```
SByte FileIndex::empty[EMPTYINDEX]
```

Padding to 512 bytes

Definition at line 141 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.41 FixedGlobals Struct Reference

```
#include <structs.h>
```

Data Fields

- WCN [Operation](#) [8]
- WCN2 [OperaFind](#) [6]
- char * [VarType](#) [10]
- char * [ExprStat](#) [21]
- char * [FunNam](#) [2]
- char * [swmes](#) [3]
- char * [fname](#)
- char * [fname2](#)
- UBYTE * [s_one](#)
- WORD [fnamebase](#)
- WORD [fname2base](#)
- WORD [fnamesize](#)
- WORD [fname2size](#)
- UINT [cTable](#) [256]

3.41.1 Detailed Description

The FIXEDGLOBALS struct is an anachronism. It started as the struct with global variables that needed initialization. It contains the elements Operation and OperaFind which define a very early way of automatically jumping to the proper operation. We find the results of it in parts of the file [opera.c](#). Later operations were treated differently in a more transparent way. We never changed the existing code. The most important part is currently the cTable which is used intensively in the compiler.

Definition at line 2521 of file [structs.h](#).

3.41.2 Field Documentation

3.41.2.1 Operation

```
WCN FixedGlobals::Operation[8]
```

Definition at line 2522 of file [structs.h](#).

3.41.2.2 OperaFind

```
WCN2 FixedGlobals::OperaFind[6]
```

Definition at line 2523 of file [structs.h](#).

3.41.2.3 VarType

```
char* FixedGlobals::VarType[10]
```

Definition at line 2524 of file [structs.h](#).

3.41.2.4 ExprStat

```
char* FixedGlobals::ExprStat[21]
```

Definition at line 2525 of file [structs.h](#).

3.41.2.5 FunNam

```
char* FixedGlobals::FunNam[2]
```

Definition at line 2526 of file [structs.h](#).

3.41.2.6 swmes

```
char* FixedGlobals::swmes[3]
```

Definition at line 2527 of file [structs.h](#).

3.41.2.7 fname

```
char* FixedGlobals::fname
```

Definition at line 2528 of file [structs.h](#).

3.41.2.8 fname2

```
char* FixedGlobals::fname2
```

Definition at line 2529 of file [structs.h](#).

3.41.2.9 s_one

```
UBYTE* FixedGlobals::s_one
```

Definition at line 2530 of file [structs.h](#).

3.41.2.10 fnamebase

WORD FixedGlobals::fnamebase

Definition at line 2531 of file [structs.h](#).

3.41.2.11 fname2base

WORD FixedGlobals::fname2base

Definition at line 2532 of file [structs.h](#).

3.41.2.12 fname2size

WORD FixedGlobals::fname2size

Definition at line 2533 of file [structs.h](#).

3.41.2.13 fname2size

WORD FixedGlobals::fname2size

Definition at line 2534 of file [structs.h](#).

3.41.2.14 cTable

UINT FixedGlobals::cTable[256]

Definition at line 2535 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.42 fixedset Struct Reference

Data Fields

- char * [name](#)
- char * [description](#)
- int [type](#)
- int [dimension](#)

3.42.1 Detailed Description

Definition at line 574 of file [structs.h](#).

3.42.2 Field Documentation

3.42.2.1 name

```
char* fixedset::name
```

Definition at line 575 of file [structs.h](#).

3.42.2.2 description

```
char* fixedset::description
```

Definition at line 576 of file [structs.h](#).

3.42.2.3 type

```
int fixedset::type
```

Definition at line 577 of file [structs.h](#).

3.42.2.4 dimension

```
int fixedset::dimension
```

Definition at line 578 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.43 flint::fmpz Class Reference

Public Member Functions

- void [print](#) (const string &text)

Data Fields

- [fmpz_t](#) d

3.43.1 Detailed Description

Definition at line 80 of file [flintinterface.h](#).

3.43.2 Constructor & Destructor Documentation

3.43.2.1 fmpz()

```
flint::fmpz::fmpz ( ) [inline]
```

Definition at line 83 of file [flintinterface.h](#).

3.43.2.2 ~fmpz()

```
flint::fmpz::~~fmpz ( ) [inline]
```

Definition at line 84 of file [flintinterface.h](#).

3.43.3 Member Function Documentation

3.43.3.1 print()

```
void flint::fmpz::print (
    const string & text ) [inline]
```

Definition at line 85 of file [flintinterface.h](#).

3.43.4 Field Documentation

3.43.4.1 d

```
fmpz_t flint::fmpz::d
```

Definition at line 82 of file [flintinterface.h](#).

The documentation for this class was generated from the following file:

- [flintinterface.h](#)

3.44 Fraction Class Reference

Public Member Functions

- [Fraction](#) (BigInt n, BigInt d)
- void [print](#) (const char *msg)
- void [setValue](#) (BigInt n, BigInt d)
- void [setValue](#) ([Fraction](#) &f)
- void [add](#) (BigInt n, BigInt d)
- void [add](#) ([Fraction](#) f)
- void [sub](#) ([Fraction](#) f)
- BigInt [gcd](#) (BigInt n0, BigInt n1)
- void [normal](#) (void)
- Bool [isEq](#) ([Fraction](#) f)

Data Fields

- BigInt [num](#)
- BigInt [den](#)
- double [ratio](#)

3.44.1 Detailed Description

Definition at line [204](#) of file [grcc.h](#).

3.44.2 Constructor & Destructor Documentation

3.44.2.1 Fraction() [1/2]

```
Fraction::Fraction ( ) [inline]
```

Definition at line [209](#) of file [grcc.h](#).

3.44.2.2 Fraction() [2/2]

```
Fraction::Fraction (
    BigInt n,
    BigInt d )
```

Definition at line [10448](#) of file [grcc.cc](#).

3.44.3 Member Function Documentation

3.44.3.1 print()

```
void Fraction::print (
    const char * msg )
```

Definition at line [10459](#) of file [grcc.cc](#).

3.44.3.2 setValue() [1/2]

```
void Fraction::setValue (
    BigInt n,
    BigInt d )
```

Definition at line [10471](#) of file [grcc.cc](#).

3.44.3.3 setValue() [2/2]

```
void Fraction::setValue (
    Fraction & f )
```

Definition at line 10479 of file [grcc.cc](#).

3.44.3.4 add() [1/2]

```
void Fraction::add (
    BigInt n,
    BigInt d )
```

Definition at line 10524 of file [grcc.cc](#).

3.44.3.5 add() [2/2]

```
void Fraction::add (
    Fraction f )
```

Definition at line 10547 of file [grcc.cc](#).

3.44.3.6 sub()

```
void Fraction::sub (
    Fraction f )
```

Definition at line 10556 of file [grcc.cc](#).

3.44.3.7 gcd()

```
BigInt Fraction::gcd (
    BigInt n0,
    BigInt n1 )
```

Definition at line 10487 of file [grcc.cc](#).

3.44.3.8 normal()

```
void Fraction::normal (
    void )
```

Definition at line 10507 of file [grcc.cc](#).

3.44.3.9 isEq()

```
Bool Fraction::isEq (
    Fraction f )
```

Definition at line 10565 of file [grcc.cc](#).

3.44.4 Field Documentation

3.44.4.1 num

```
BigInt Fraction::num
```

Definition at line 206 of file [grcc.h](#).

3.44.4.2 den

```
BigInt Fraction::den
```

Definition at line 206 of file [grcc.h](#).

3.44.4.3 ratio

```
double Fraction::ratio
```

Definition at line 207 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.45 FUN_INFO Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [location](#)
- int [numargs](#)
- int [numfunnies](#)
- int [numwildcards](#)
- int [symmet](#)
- int [tensor](#)
- int [commute](#)

3.45.1 Detailed Description

The struct [FUN_INFO](#) is used for information about functions in the file [smart.c](#) which is supposed to intelligently look for patterns in complicated wildcard situations involving symmetric functions.

Definition at line 609 of file [structs.h](#).

3.45.2 Field Documentation

3.45.2.1 location

```
WORD* FUN_INFO::location
```

Definition at line 610 of file [structs.h](#).

3.45.2.2 numargs

```
int FUN_INFO::numargs
```

Definition at line 611 of file [structs.h](#).

3.45.2.3 numfunnies

```
int FUN_INFO::numfunnies
```

Definition at line 612 of file [structs.h](#).

3.45.2.4 numwildcards

```
int FUN_INFO::numwildcards
```

Definition at line 613 of file [structs.h](#).

3.45.2.5 symmet

```
int FUN_INFO::symmet
```

Definition at line 614 of file [structs.h](#).

3.45.2.6 tensor

```
int FUN_INFO::tensor
```

Definition at line 615 of file [structs.h](#).

3.45.2.7 commute

```
int FUN_INFO::commute
```

Definition at line 616 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.46 FuNcTiOn Struct Reference

```
#include <structs.h>
```

Collaboration diagram for FuNcTiOn:

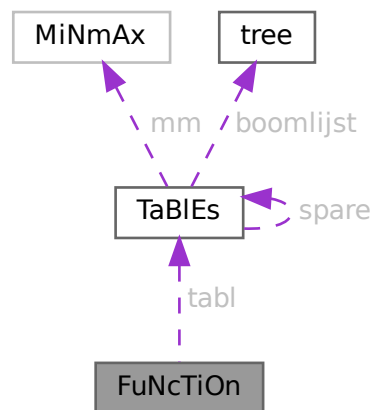

Data Fields

- [TABLES](#) [tabl](#)
- LONG [symminfo](#)
- LONG [name](#)
- WORD [commute](#)
- WORD [complex](#)
- WORD [number](#)
- WORD [flags](#)
- WORD [spec](#)
- WORD [symmetric](#)
- WORD [node](#)
- WORD [namesize](#)
- WORD [dimension](#)
- WORD [maxnumargs](#)
- WORD [minnumargs](#)

3.46.1 Detailed Description

Contains all information about a function. Also used for tables. It is used in the [LIST](#) elements of AC.

Definition at line [487](#) of file [structs.h](#).

3.46.2 Field Documentation

3.46.2.1 `tabl`

`TABLES FuNcTiOn::tabl`

Used if redefined as table. != 0 if function is a table

Definition at line 488 of file [structs.h](#).

3.46.2.2 `symminfo`

`LONG FuNcTiOn::symminfo`

Info regarding symm properties offset in buffer

Definition at line 489 of file [structs.h](#).

3.46.2.3 `name`

`LONG FuNcTiOn::name`

Location in namebuffer of [NAMETREE](#)

Definition at line 490 of file [structs.h](#).

Referenced by [StartVariables\(\)](#).

3.46.2.4 `commute`

`WORD FuNcTiOn::commute`

Commutation properties

Definition at line 491 of file [structs.h](#).

3.46.2.5 `complex`

`WORD FuNcTiOn::complex`

Properties under complex conjugation

Definition at line 492 of file [structs.h](#).

3.46.2.6 number

WORD FuNcTiOn::number

Number when stored in file

Definition at line 493 of file [structs.h](#).

Referenced by [ReadSaveIndex\(\)](#).

3.46.2.7 flags

WORD FuNcTiOn::flags

Used to indicate usage when storing

Definition at line 494 of file [structs.h](#).

3.46.2.8 spec

WORD FuNcTiOn::spec

Regular, Tensor, etc. See [FunSpecs](#).

Definition at line 495 of file [structs.h](#).

Referenced by [ReadSaveVariables\(\)](#).

3.46.2.9 symmetric

WORD FuNcTiOn::symmetric

0 if symmetric properties

Definition at line 496 of file [structs.h](#).

Referenced by [StartVariables\(\)](#).

3.46.2.10 node

WORD FuNcTiOn::node

Location in namenode of [NAMETREE](#)

Definition at line 497 of file [structs.h](#).

3.46.2.11 namesize

WORD FuNcTiOn::namesize

Length of the name

Definition at line 498 of file [structs.h](#).

3.46.2.12 dimension

WORD FuNcTiOn::dimension

Definition at line 499 of file [structs.h](#).

3.46.2.13 maxnumargs

WORD FuNcTiOn::maxnumargs

Definition at line 500 of file [structs.h](#).

3.46.2.14 minnumargs

WORD FuNcTiOn::minnumargs

Definition at line 501 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.47 gcd_heuristic_failed Class Reference

3.47.1 Detailed Description

Definition at line 33 of file [polygcd.h](#).

The documentation for this class was generated from the following file:

- [polygcd.h](#)

3.48 HANDLERS Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD [newlogonly](#)
- WORD [newhandle](#)
- WORD [oldhandle](#)
- WORD [oldlogonly](#)
- WORD [oldprinttype](#)
- WORD [oldsilent](#)

3.48.1 Detailed Description

The struct [HANDLERS](#) is used in the communication with external channels.

Definition at line [943](#) of file [structs.h](#).

3.48.2 Field Documentation

3.48.2.1 newlogonly

```
WORD HANDLERS::newlogonly
```

Definition at line [944](#) of file [structs.h](#).

3.48.2.2 newhandle

```
WORD HANDLERS::newhandle
```

Definition at line [945](#) of file [structs.h](#).

3.48.2.3 oldhandle

```
WORD HANDLERS::oldhandle
```

Definition at line [946](#) of file [structs.h](#).

3.48.2.4 oldlogonly

```
WORD HANDLERS::oldlogonly
```

Definition at line [947](#) of file [structs.h](#).

3.48.2.5 oldprinttype

```
WORD HANDLERS::oldprinttype
```

Definition at line [948](#) of file [structs.h](#).

3.48.2.6 oldsilent

```
WORD HANDLERS::oldsilent
```

Definition at line 949 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.49 Input Struct Reference

Data Fields

- const char * [name](#)
- int [icode](#)
- int [nplistn](#)
- const char * [plistn](#) [GRCC_MAXLEGS]
- int [plistc](#) [GRCC_MAXLEGS]
- int [cvallist](#) [GRCC_MAXNCPLG]

3.49.1 Detailed Description

Definition at line 193 of file [grccparam.h](#).

3.49.2 Field Documentation

3.49.2.1 name

```
const char* IInput::name
```

Definition at line 194 of file [grccparam.h](#).

3.49.2.2 icode

```
int IInput::icode
```

Definition at line 195 of file [grccparam.h](#).

3.49.2.3 nplistn

```
int IInput::nplistn
```

Definition at line 196 of file [grccparam.h](#).

3.49.2.4 plistn

```
const char* IInput::plistn[GRCC_MAXLEGS]
```

Definition at line 197 of file [grccparam.h](#).

3.49.2.5 plistc

```
int IInput::plistc[GRCC_MAXLEGS]
```

Definition at line 198 of file [grccparam.h](#).

3.49.2.6 cvallist

```
int IInput::cvallist[GRCC_MAXNCPLG]
```

Definition at line 199 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.50 InDeX Struct Reference

Data Fields

- LONG [name](#)
- WORD [type](#)
- WORD [dimension](#)
- WORD [number](#)
- WORD [flags](#)
- WORD [nmin4](#)
- WORD [node](#)
- WORD [namesize](#)

3.50.1 Detailed Description

Definition at line 442 of file [structs.h](#).

3.50.2 Field Documentation

3.50.2.1 name

```
LONG InDeX::name
```

Definition at line 443 of file [structs.h](#).

3.50.2.2 type

WORD InDeX::type

Definition at line 444 of file [structs.h](#).

3.50.2.3 dimension

WORD InDeX::dimension

Definition at line 445 of file [structs.h](#).

3.50.2.4 number

WORD InDeX::number

Definition at line 446 of file [structs.h](#).

3.50.2.5 flags

WORD InDeX::flags

Definition at line 447 of file [structs.h](#).

3.50.2.6 nmin4

WORD InDeX::nmin4

Definition at line 448 of file [structs.h](#).

3.50.2.7 node

WORD InDeX::node

Definition at line 449 of file [structs.h](#).

3.50.2.8 namesize

WORD InDeX::namesize


Definition at line 450 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.51 indexblock Struct Reference

Collaboration diagram for indexblock:



Data Fields

- MLONG [flags](#)
- MLONG [previousblock](#)
- MLONG [position](#)
- OBJECTS [objects](#) [NUMOBJECTS]

3.51.1 Detailed Description

Definition at line [110](#) of file [minos.h](#).

3.51.2 Field Documentation

3.51.2.1 flags

MLONG `indexblock::flags`

Definition at line [111](#) of file [minos.h](#).

3.51.2.2 previousblock

MLONG `indexblock::previousblock`

Definition at line [112](#) of file [minos.h](#).

3.51.2.3 position

MLONG `indexblock::position`

Definition at line [113](#) of file [minos.h](#).

3.51.2.4 objects

`OBJECTS` `indexblock::objects[NUMOBJECTS]`

Definition at line 114 of file [minos.h](#).


The documentation for this struct was generated from the following file:

- [minos.h](#)

3.52 InDeXeNtRy Struct Reference

```
#include <structs.h>
```

Collaboration diagram for InDeXeNtRy:



Data Fields

- `POSITION` `position`
- `POSITION` `length`
- `POSITION` `variables`
- `LONG` `CompressSize`
- `WORD` `nsymbols`
- `WORD` `nindices`
- `WORD` `nvectors`
- `WORD` `nfunctions`
- `WORD` `size`
- `SBYTE` `name` `[MAXENAME+1]`

3.52.1 Detailed Description

Defines the structure of an entry in a file index (see struct [FiLeInDeX](#)).

It represents one expression in the file.

Definition at line 100 of file [structs.h](#).

3.52.2 Field Documentation

3.52.2.1 position

`POSITION InDeXeNtRy::position`

Position of the expression itself

Definition at line 101 of file [structs.h](#).

3.52.2.2 length

`POSITION InDeXeNtRy::length`

Length of the expression itself

Definition at line 102 of file [structs.h](#).

3.52.2.3 variables

`POSITION InDeXeNtRy::variables`

Position of the list with variables

Definition at line 103 of file [structs.h](#).

3.52.2.4 CompressSize

`LONG InDeXeNtRy::CompressSize`

Size of buffer before compress

Definition at line 104 of file [structs.h](#).

3.52.2.5 nsymbols

`WORD InDeXeNtRy::nsymbols`

Number of symbols in the list

Definition at line 105 of file [structs.h](#).

Referenced by [ReadSaveVariables\(\)](#).

3.52.2.6 nindices

WORD InDeXeNtRy::nindices

Number of indices in the list

Definition at line 106 of file [structs.h](#).

Referenced by [ReadSaveVariables\(\)](#).

3.52.2.7 nvectors

WORD InDeXeNtRy::nvectors

Number of vectors in the list

Definition at line 107 of file [structs.h](#).

Referenced by [ReadSaveVariables\(\)](#).

3.52.2.8 nfunctions

WORD InDeXeNtRy::nfunctions

Number of functions in the list

Definition at line 108 of file [structs.h](#).

Referenced by [ReadSaveVariables\(\)](#).

3.52.2.9 size

WORD InDeXeNtRy::size

Size of variables field

Definition at line 109 of file [structs.h](#).

3.52.2.10 name

SBYTE InDeXeNtRy::name[MAXENAME+1]

Name of expression

Definition at line 110 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.53 iniinfo Struct Reference

Data Fields

- MLONG [entriesinindex](#)
- MLONG [numberofindexblocks](#)
- MLONG [firstindexblock](#)
- MLONG [lastindexblock](#)
- MLONG [numberoftables](#)
- MLONG [numberofnamesblocks](#)
- MLONG [firstnameblock](#)
- MLONG [lastnameblock](#)

3.53.1 Detailed Description

Definition at line 85 of file [minos.h](#).

3.53.2 Field Documentation

3.53.2.1 entriesinindex

```
MLONG iniinfo::entriesinindex
```

Definition at line 87 of file [minos.h](#).

3.53.2.2 numberofindexblocks

```
MLONG iniinfo::numberofindexblocks
```

Definition at line 88 of file [minos.h](#).

3.53.2.3 firstindexblock

```
MLONG iniinfo::firstindexblock
```

Definition at line 89 of file [minos.h](#).

3.53.2.4 lastindexblock

```
MLONG iniinfo::lastindexblock
```

Definition at line 90 of file [minos.h](#).

3.53.2.5 numberoftables

```
MLONG iniinfo::numberoftables
```

Definition at line 91 of file [minos.h](#).

3.53.2.6 numberofnamesblocks

```
MLONG iniinfo::numberofnamesblocks
```

Definition at line 92 of file [minos.h](#).

3.53.2.7 firstnameblock

```
MLONG iniinfo::firstnameblock
```

Definition at line 93 of file [minos.h](#).

3.53.2.8 lastnameblock

```
MLONG iniinfo::lastnameblock
```

Definition at line 94 of file [minos.h](#).

The documentation for this struct was generated from the following file:

- [minos.h](#)

3.54 INSIDEINFO Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [buffer](#)
- int [oldcompiletype](#)
- int [oldparallelflag](#)
- int [oldnumpotmoddollars](#)
- WORD [size](#)
- WORD [numdollars](#)
- WORD [oldcbuf](#)
- WORD [oldrbuf](#)
- WORD [inscbuf](#)
- WORD [oldcnumlhs](#)

3.54.1 Detailed Description

Used for #inside

Definition at line 836 of file [structs.h](#).

3.54.2 Field Documentation

3.54.2.1 buffer

```
WORD*  INSIDEINFO::buffer
```

Definition at line 837 of file [structs.h](#).

3.54.2.2 oldcompiletype

```
int  INSIDEINFO::oldcompiletype
```

Definition at line 838 of file [structs.h](#).

3.54.2.3 oldparallelflag

```
int  INSIDEINFO::oldparallelflag
```

Definition at line 839 of file [structs.h](#).

3.54.2.4 oldnumpotmoddollars

```
int  INSIDEINFO::oldnumpotmoddollars
```

Definition at line 840 of file [structs.h](#).

3.54.2.5 size

```
WORD  INSIDEINFO::size
```

Definition at line 841 of file [structs.h](#).

3.54.2.6 numdollars

```
WORD  INSIDEINFO::numdollars
```

Definition at line 842 of file [structs.h](#).

3.54.2.7 oldcbuf

WORD INSIDEINFO::oldcbuf

Definition at line 843 of file [structs.h](#).

3.54.2.8 oldrbuf

WORD INSIDEINFO::oldrbuf

Definition at line 844 of file [structs.h](#).

3.54.2.9 inscbuf

WORD INSIDEINFO::inscbuf

Definition at line 845 of file [structs.h](#).

3.54.2.10 oldcnumlhs

WORD INSIDEINFO::oldcnumlhs


Definition at line 846 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.55 Interaction Class Reference

Collaboration diagram for Interaction:

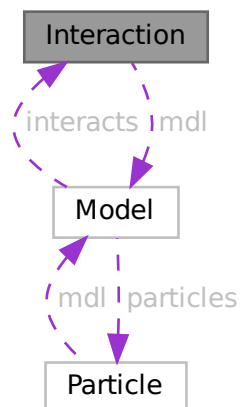

Public Member Functions

- [Interaction](#) ([Model](#) *modl, int iid, const char *nam, int icode, int *cpl, int nlgs, int *plst, int csm, int lp)
- void [prlInteraction](#) (void)

Data Fields

- [Model](#) * [mdl](#)
- char * [name](#)
- int * [plist](#)
- int * [clist](#)
- int * [slist](#)
- int [id](#)
- int [csum](#)
- int [nlegs](#)
- int [loop](#)
- int [icode](#)
- int [nplist](#)
- int [nclist](#)
- int [nslist](#)

3.55.1 Detailed Description

Definition at line [258](#) of file [grcc.h](#).

3.55.2 Constructor & Destructor Documentation

3.55.2.1 Interaction()

```
Interaction::Interaction (  
    Model * modl,  
    int iid,  
    const char * nam,  
    int icode,  
    int * cpl,  
    int nlgs,  
    int * plst,  
    int csm,  
    int lp )
```

Definition at line [1819](#) of file [grcc.cc](#).

3.55.2.2 ~Interaction()

```
Interaction::~~Interaction (  
    void )
```

Definition at line [1943](#) of file [grcc.cc](#).

3.55.3 Member Function Documentation

3.55.3.1 prInteraction()

```
void Interaction::prInteraction (
    void )
```

Definition at line 1958 of file [grcc.cc](#).

3.55.4 Field Documentation

3.55.4.1 mdl

```
Model* Interaction::mdl
```

Definition at line 260 of file [grcc.h](#).

3.55.4.2 name

```
char* Interaction::name
```

Definition at line 261 of file [grcc.h](#).

3.55.4.3 plist

```
int* Interaction::plist
```

Definition at line 262 of file [grcc.h](#).

3.55.4.4 clist

```
int* Interaction::clist
```

Definition at line 263 of file [grcc.h](#).

3.55.4.5 slist

```
int* Interaction::slist
```

Definition at line 264 of file [grcc.h](#).

3.55.4.6 id

```
int Interaction::id
```

Definition at line 266 of file [grcc.h](#).

3.55.4.7 csum

```
int Interaction::csum
```

Definition at line 267 of file [grcc.h](#).

3.55.4.8 nlegs

```
int Interaction::nlegs
```

Definition at line 268 of file [grcc.h](#).

3.55.4.9 loop

```
int Interaction::loop
```

Definition at line 269 of file [grcc.h](#).

3.55.4.10 icode

```
int Interaction::icode
```

Definition at line 270 of file [grcc.h](#).

3.55.4.11 nplist

```
int Interaction::nplist
```

Definition at line 272 of file [grcc.h](#).

3.55.4.12 nclist

```
int Interaction::nclist
```

Definition at line 273 of file [grcc.h](#).

3.55.4.13 nslist

```
int Interaction::nslist
```

Definition at line 274 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.56 KEYWORD Struct Reference

```
#include <structs.h>
```

Data Fields

- char * [name](#)
- TFUN [func](#)
- int [type](#)
- int [flags](#)

3.56.1 Detailed Description

The [KEYWORD](#) struct defines names of commands/statements and the routine to be called when they are encountered by the compiler or preprocessor.

Definition at line [218](#) of file [structs.h](#).

3.56.2 Field Documentation

3.56.2.1 name

```
char* KEYWORD::name
```

Definition at line [219](#) of file [structs.h](#).

3.56.2.2 func

```
TFUN KEYWORD::func
```

Definition at line [220](#) of file [structs.h](#).

3.56.2.3 type

```
int KEYWORD::type
```

Definition at line [221](#) of file [structs.h](#).

3.56.2.4 flags

```
int KEYWORD::flags
```

Definition at line [222](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.57 KEYWORDV Struct Reference

```
#include <structs.h>
```

Data Fields

- char * [name](#)
- int * [var](#)
- int [type](#)
- int [flags](#)

3.57.1 Detailed Description

The [KEYWORDV](#) struct defines names of commands/statements and the variable to be affected when they are encountered by the compiler or preprocessor.

Definition at line [230](#) of file [structs.h](#).

3.57.2 Field Documentation

3.57.2.1 name

```
char* KEYWORDV::name
```

Definition at line [231](#) of file [structs.h](#).

3.57.2.2 var

```
int* KEYWORDV::var
```

Definition at line [232](#) of file [structs.h](#).

3.57.2.3 type

```
int KEYWORDV::type
```

Definition at line [233](#) of file [structs.h](#).

3.57.2.4 flags

```
int KEYWORDV::flags
```

Definition at line [234](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.58 LIST Struct Reference

```
#include <structs.h>
```

Data Fields

- void * [lijst](#)
- char * [message](#)
- int [num](#)
- int [maxnum](#)
- int [size](#)
- int [numglobal](#)
- int [numtemp](#)
- int [numclear](#)

3.58.1 Detailed Description

Much information is stored in arrays of which we can double the size if the array proves to be too small. Such arrays are controlled by a variable of type [LIST](#). The routines that expand the lists are in the file [tools.c](#)

Definition at line [202](#) of file [structs.h](#).

3.58.2 Field Documentation

3.58.2.1 lijst

```
void* LIST::lijst
```

[D] Holds space for "maxnum" elements of size "size" each

Definition at line [203](#) of file [structs.h](#).

3.58.2.2 message

```
char* LIST::message
```

Text for Malloc1 when allocating lijst. Set to constant string.

Definition at line [204](#) of file [structs.h](#).

3.58.2.3 num

```
int LIST::num
```

Number of elements in lijst.

Definition at line [205](#) of file [structs.h](#).

3.58.2.4 maxnum

```
int LIST::maxnum
```

Maximum number of elements in lijst.

Definition at line 206 of file [structs.h](#).

3.58.2.5 size

```
int LIST::size
```

Size of one element in lijst.

Definition at line 207 of file [structs.h](#).

3.58.2.6 numglobal

```
int LIST::numglobal
```

Marker for position when .global is executed.

Definition at line 208 of file [structs.h](#).

3.58.2.7 numtemp

```
int LIST::numtemp
```

At the moment only needed for sets and setstore.

Definition at line 209 of file [structs.h](#).

3.58.2.8 numclear

```
int LIST::numclear
```

Only for the clear instruction.


Definition at line 210 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.59 longMultiStruct Struct Reference

Collaboration diagram for longMultiStruct:



Data Fields

- UBYTE * [buffer](#)
- int [bufpos](#)
- int [packpos](#)
- int [nPacks](#)
- int [lastLen](#)
- struct [longMultiStruct](#) * [next](#)

3.59.1 Detailed Description

Definition at line [1013](#) of file [mpi.c](#).

3.59.2 Field Documentation

3.59.2.1 buffer

```
UBYTE* longMultiStruct::buffer
```

Definition at line [1014](#) of file [mpi.c](#).

3.59.2.2 bufpos

```
int longMultiStruct::bufpos
```

Definition at line [1015](#) of file [mpi.c](#).

3.59.2.3 packpos

```
int longMultiStruct::packpos
```

Definition at line [1016](#) of file [mpi.c](#).

3.59.2.4 nPacks

```
int longMultiStruct::nPacks
```

Definition at line 1017 of file [mpi.c](#).

3.59.2.5 lastLen

```
int longMultiStruct::lastLen
```

Definition at line 1018 of file [mpi.c](#).

3.59.2.6 next

```
struct longMultiStruct* longMultiStruct::next
```

Definition at line 1021 of file [mpi.c](#).


The documentation for this struct was generated from the following file:

- [mpi.c](#)

3.60 M_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for M_const:

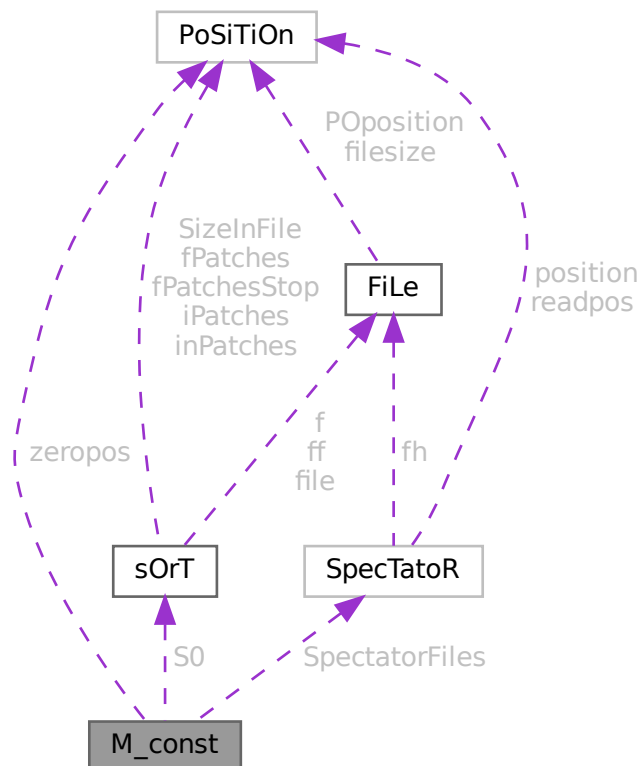

Data Fields

- [POSITION](#) [zeropos](#)
- [SORTING](#) * [S0](#)
- [UWORD](#) * [gcmmod](#)
- [UWORD](#) * [gpowmod](#)
- [UBYTE](#) * [TempDir](#)
- [UBYTE](#) * [TempSortDir](#)
- [UBYTE](#) * [IncDir](#)
- [UBYTE](#) * [InputFileName](#)
- [UBYTE](#) * [LogFileName](#)
- [UBYTE](#) * [OutBuffer](#)
- [UBYTE](#) * [Path](#)
- [UBYTE](#) * [SetupDir](#)
- [UBYTE](#) * [SetupFile](#)
- [UBYTE](#) * [gFortran90Kind](#)
- [UBYTE](#) * [gextrasym](#)
- [UBYTE](#) * [ggextrasym](#)
- [UBYTE](#) * [oldnumextrasymbols](#)
- [SPECTATOR](#) * [SpectatorFiles](#)
- [LONG](#) [MaxTer](#)
- [LONG](#) [CompressSize](#)
- [LONG](#) [ScratSize](#)
- [LONG](#) [HideSize](#)
- [LONG](#) [SizeStoreCache](#)
- [LONG](#) [MaxStreamSize](#)
- [LONG](#) [SIOsize](#)
- [LONG](#) [SLargeSize](#)
- [LONG](#) [SSmallEsize](#)
- [LONG](#) [SSmallSize](#)
- [LONG](#) [STermsInSmall](#)
- [LONG](#) [MaxBracketBufferSize](#)
- [LONG](#) [hProcessBucketSize](#)
- [LONG](#) [gProcessBucketSize](#)
- [LONG](#) [shmWinSize](#)
- [LONG](#) [OldChildTime](#)
- [LONG](#) [OldSecTime](#)
- [LONG](#) [OldMilliTime](#)
- [LONG](#) [WorkSize](#)
- [LONG](#) [gThreadBucketSize](#)
- [LONG](#) [ggThreadBucketSize](#)
- [LONG](#) [SumTime](#)
- [LONG](#) [SpectatorSize](#)
- [LONG](#) [TimeLimit](#)
- [int](#) [FileOnlyFlag](#)
- [int](#) [Interact](#)
- [int](#) [MaxParLevel](#)
- [int](#) [OutBufSize](#)
- [int](#) [SMaxFpatches](#)
- [int](#) [SMaxPatches](#)
- [int](#) [StdOut](#)
- [int](#) [ginsidefirst](#)
- [int](#) [gDefDim](#)
- [int](#) [gDefDim4](#)
- [int](#) [NumFixedSets](#)

- int NumFixedFunctions
- int rbufnum
- int dbufnum
- int sbufnum
- int zbufnum
- int SkipClears
- int gTokensWriteFlag
- int gfunpowers
- int gStatsFlag
- int gNamesFlag
- int gCodesFlag
- int gSortType
- int gproperorderflag
- int hparallelflag
- int gparallelflag
- int totalnumberofthreads
- int gSizeCommuteInSet
- int gThreadStats
- int ggThreadStats
- int gFinalStats
- int ggFinalStats
- int gThreadsFlag
- int ggThreadsFlag
- int gThreadBalancing
- int ggThreadBalancing
- int gThreadSortFileSynch
- int ggThreadSortFileSynch
- int gProcessStats
- int ggProcessStats
- int gOldParallelStats
- int ggOldParallelStats
- int maxFlevels
- int resetTimeOnClear
- int gcNumDollars
- int MultiRun
- int gNoSpacesInNumbers
- int ggNoSpacesInNumbers
- int glsFortran90
- int PrintTotalSize
- int fbufferize
- int gOldFactArgFlag
- int ggOldFactArgFlag
- int gnumextrasym
- int ggnumextrasym
- int NumSpectatorFiles
- int SizeForSpectatorFiles
- int gOldGCDflag
- int ggOldGCDflag
- int gWTimeStatsFlag
- int ggWTimeStatsFlag
- int jumpratio
- WORD MaxTal
- WORD IndDum
- WORD DumInd
- WORD Willnd

- WORD [gncmod](#)
- WORD [gnpowmod](#)
- WORD [gmodmode](#)
- WORD [gUnitTrace](#)
- WORD [gOutputMode](#)
- WORD [gOutputSpaces](#)
- WORD [gOutNumberType](#)
- WORD [gCnumpows](#)
- WORD [gUniTrace](#) [4]
- WORD [MaxWildcards](#)
- WORD [mTraceDum](#)
- WORD [OffsetIndex](#)
- WORD [OffsetVector](#)
- WORD [RepMax](#)
- WORD [LogType](#)
- WORD [ggStatsFlag](#)
- WORD [gLineLength](#)
- WORD [qError](#)
- WORD [FortranCont](#)
- WORD [HoldFlag](#)
- WORD [Ordering](#) [15]
- WORD [silent](#)
- WORD [tracebackflag](#)
- WORD [expnum](#)
- WORD [denomnum](#)
- WORD [facnum](#)
- WORD [invfacnum](#)
- WORD [sumnum](#)
- WORD [sumpnum](#)
- WORD [OldOrderFlag](#)
- WORD [termfunnum](#)
- WORD [matchfunnum](#)
- WORD [countfunnum](#)
- WORD [gPolyFun](#)
- WORD [gPolyFunInv](#)
- WORD [gPolyFunType](#)
- WORD [gPolyFunExp](#)
- WORD [gPolyFunVar](#)
- WORD [gPolyFunPow](#)
- WORD [dollarzero](#)
- WORD [atstartup](#)
- WORD [exitflag](#)
- WORD [NumStoreCaches](#)
- WORD [gIndentSpace](#)
- WORD [ggIndentSpace](#)
- WORD [gShortStatsMax](#)
- WORD [ggShortStatsMax](#)
- WORD [gextrasymbols](#)
- WORD [ggextrasymbols](#)
- WORD [zerorhs](#)
- WORD [onerhs](#)
- WORD [havesortdir](#)
- WORD [vectorzero](#)
- WORD [ClearStore](#)
- WORD [BracketFactors](#) [8]
- BOOL [FromStdin](#)
- BOOL [IgnoreDeprecation](#)

3.60.1 Detailed Description

The [M_const](#) struct is part of the global data and resides in the [ALLGLOBALS](#) struct A under the name #M. We see it used with the macro AM as in AM.S0. It contains global settings at startup or .clear.

Definition at line [1389](#) of file [structs.h](#).

3.60.2 Field Documentation

3.60.2.1 zeropos

```
POSITION M_const::zeropos
```

Definition at line [1390](#) of file [structs.h](#).

3.60.2.2 S0

```
SORTING* M_const::S0
```

[D] The main sort buffer

Definition at line [1391](#) of file [structs.h](#).

3.60.2.3 gcmmod

```
UWORD* M_const::gcmmod
```

Global setting of modulus. Uses AC.cmod's memory

Definition at line [1392](#) of file [structs.h](#).

3.60.2.4 gpowmod

```
UWORD* M_const::gpowmod
```

Global setting printing as powers. Uses AC.cmod's memory

Definition at line [1393](#) of file [structs.h](#).

3.60.2.5 TempDir

```
UBYTE* M_const::TempDir
```

Definition at line [1394](#) of file [structs.h](#).

3.60.2.6 TempSortDir

UBYTE* M_const::TempSortDir

Definition at line 1395 of file [structs.h](#).

3.60.2.7 IncDir

UBYTE* M_const::IncDir

Definition at line 1396 of file [structs.h](#).

3.60.2.8 InputFileName

UBYTE* M_const::InputFileName

Definition at line 1397 of file [structs.h](#).

3.60.2.9 LogFileName

UBYTE* M_const::LogFileName

Definition at line 1398 of file [structs.h](#).

3.60.2.10 OutBuffer

UBYTE* M_const::OutBuffer

Definition at line 1399 of file [structs.h](#).

3.60.2.11 Path

UBYTE* M_const::Path

Definition at line 1400 of file [structs.h](#).

3.60.2.12 SetupDir

UBYTE* M_const::SetupDir

Definition at line 1401 of file [structs.h](#).

3.60.2.13 SetupFile

UBYTE* M_const::SetupFile

Definition at line 1402 of file [structs.h](#).

3.60.2.14 gFortran90Kind

```
UBYTE* M_const::gFortran90Kind
```

Definition at line 1403 of file [structs.h](#).

3.60.2.15 gextrasym

```
UBYTE* M_const::gextrasym
```

Definition at line 1404 of file [structs.h](#).

3.60.2.16 ggextrasym

```
UBYTE* M_const::ggextrasym
```

Definition at line 1405 of file [structs.h](#).

3.60.2.17 oldnumextrasymbols

```
UBYTE* M_const::oldnumextrasymbols
```

Definition at line 1406 of file [structs.h](#).

3.60.2.18 SpectatorFiles

```
SPECTATOR* M_const::SpectatorFiles
```

Definition at line 1407 of file [structs.h](#).

3.60.2.19 MaxTer

```
LONG M_const::MaxTer
```

Definition at line 1415 of file [structs.h](#).

3.60.2.20 CompressSize

```
LONG M_const::CompressSize
```

Definition at line 1416 of file [structs.h](#).

3.60.2.21 ScratSize

```
LONG M_const::SkratSize
```

Definition at line 1417 of file [structs.h](#).

3.60.2.22 HideSize

`LONG M_const::HideSize`

Definition at line [1418](#) of file [structs.h](#).

3.60.2.23 SizeStoreCache

`LONG M_const::SizeStoreCache`

Definition at line [1419](#) of file [structs.h](#).

3.60.2.24 MaxStreamSize

`LONG M_const::MaxStreamSize`

Definition at line [1420](#) of file [structs.h](#).

3.60.2.25 SIOsize

`LONG M_const::SIOsize`

Definition at line [1421](#) of file [structs.h](#).

3.60.2.26 SLargeSize

`LONG M_const::SLargeSize`

Definition at line [1422](#) of file [structs.h](#).

3.60.2.27 SSmallEsize

`LONG M_const::SSmallEsize`

Definition at line [1423](#) of file [structs.h](#).

3.60.2.28 SSmallSize

`LONG M_const::SSmallSize`

Definition at line [1424](#) of file [structs.h](#).

3.60.2.29 STermsInSmall

`LONG M_const::STermsInSmall`

Definition at line [1425](#) of file [structs.h](#).

3.60.2.30 MaxBracketBufferSize

LONG M_const::MaxBracketBufferSize

Definition at line 1426 of file [structs.h](#).

3.60.2.31 hProcessBucketSize

LONG M_const::hProcessBucketSize

Definition at line 1427 of file [structs.h](#).

3.60.2.32 gProcessBucketSize

LONG M_const::gProcessBucketSize

Definition at line 1428 of file [structs.h](#).

3.60.2.33 shmWinSize

LONG M_const::shmWinSize

Definition at line 1429 of file [structs.h](#).

3.60.2.34 OldChildTime

LONG M_const::OldChildTime

Definition at line 1430 of file [structs.h](#).

3.60.2.35 OldSecTime

LONG M_const::OldSecTime

Definition at line 1431 of file [structs.h](#).

3.60.2.36 OldMilliTime

LONG M_const::OldMilliTime

Definition at line 1432 of file [structs.h](#).

3.60.2.37 WorkSize

LONG M_const::WorkSize

Definition at line 1433 of file [structs.h](#).

3.60.2.38 gThreadBucketSize

LONG M_const::gThreadBucketSize

Definition at line 1434 of file [structs.h](#).

3.60.2.39 ggThreadBucketSize

LONG M_const::ggThreadBucketSize

Definition at line 1435 of file [structs.h](#).

3.60.2.40 SumTime

LONG M_const::SumTime

Definition at line 1436 of file [structs.h](#).

3.60.2.41 SpectatorSize

LONG M_const::SpectatorSize

Definition at line 1437 of file [structs.h](#).

3.60.2.42 TimeLimit

LONG M_const::TimeLimit

Definition at line 1438 of file [structs.h](#).

3.60.2.43 FileOnlyFlag

int M_const::FileOnlyFlag

Definition at line 1445 of file [structs.h](#).

3.60.2.44 Interact

int M_const::Interact

Definition at line 1446 of file [structs.h](#).

3.60.2.45 MaxParLevel

int M_const::MaxParLevel

Definition at line 1447 of file [structs.h](#).

3.60.2.46 OutBufSize

```
int M_const::OutBufSize
```

Definition at line 1448 of file [structs.h](#).

3.60.2.47 SMaxFpatches

```
int M_const::SMaxFpatches
```

Definition at line 1449 of file [structs.h](#).

3.60.2.48 SMaxPatches

```
int M_const::SMaxPatches
```

Definition at line 1450 of file [structs.h](#).

3.60.2.49 StdOut

```
int M_const::StdOut
```

Definition at line 1451 of file [structs.h](#).

3.60.2.50 ginsidefirst

```
int M_const::ginsidefirst
```

Definition at line 1452 of file [structs.h](#).

3.60.2.51 gDefDim

```
int M_const::gDefDim
```

Definition at line 1453 of file [structs.h](#).

3.60.2.52 gDefDim4

```
int M_const::gDefDim4
```

Definition at line 1454 of file [structs.h](#).

3.60.2.53 NumFixedSets

```
int M_const::NumFixedSets
```

Definition at line 1455 of file [structs.h](#).

3.60.2.54 NumFixedFunctions

```
int M_const::NumFixedFunctions
```

Definition at line [1456](#) of file [structs.h](#).

3.60.2.55 rbufnum

```
int M_const::rbufnum
```

Definition at line [1457](#) of file [structs.h](#).

3.60.2.56 dbufnum

```
int M_const::dbufnum
```

Definition at line [1458](#) of file [structs.h](#).

3.60.2.57 sbufnum

```
int M_const::sbufnum
```

Definition at line [1459](#) of file [structs.h](#).

3.60.2.58 zbufnum

```
int M_const::zbufnum
```

Definition at line [1460](#) of file [structs.h](#).

3.60.2.59 SkipClears

```
int M_const::SkipClears
```

Definition at line [1461](#) of file [structs.h](#).

3.60.2.60 gTokensWriteFlag

```
int M_const::gTokensWriteFlag
```

Definition at line [1462](#) of file [structs.h](#).

3.60.2.61 gfunpowers

```
int M_const::gfunpowers
```

Definition at line [1463](#) of file [structs.h](#).

3.60.2.62 gStatsFlag

```
int M_const::gStatsFlag
```

Definition at line 1464 of file [structs.h](#).

3.60.2.63 gNamesFlag

```
int M_const::gNamesFlag
```

Definition at line 1465 of file [structs.h](#).

3.60.2.64 gCodesFlag

```
int M_const::gCodesFlag
```

Definition at line 1466 of file [structs.h](#).

3.60.2.65 gSortType

```
int M_const::gSortType
```

Definition at line 1467 of file [structs.h](#).

3.60.2.66 gproperorderflag

```
int M_const::gproperorderflag
```

Definition at line 1468 of file [structs.h](#).

3.60.2.67 hparallelflag

```
int M_const::hparallelflag
```

Definition at line 1469 of file [structs.h](#).

3.60.2.68 gparallelflag

```
int M_const::gparallelflag
```

Definition at line 1470 of file [structs.h](#).

3.60.2.69 totalnumberofthreads

```
int M_const::totalnumberofthreads
```

Definition at line 1471 of file [structs.h](#).

3.60.2.70 gSizeCommuteInSet

```
int M_const::gSizeCommuteInSet
```

Definition at line 1472 of file [structs.h](#).

3.60.2.71 gThreadStats

```
int M_const::gThreadStats
```

Definition at line 1473 of file [structs.h](#).

3.60.2.72 ggThreadStats

```
int M_const::ggThreadStats
```

Definition at line 1474 of file [structs.h](#).

3.60.2.73 gFinalStats

```
int M_const::gFinalStats
```

Definition at line 1475 of file [structs.h](#).

3.60.2.74 ggFinalStats

```
int M_const::ggFinalStats
```

Definition at line 1476 of file [structs.h](#).

3.60.2.75 gThreadsFlag

```
int M_const::gThreadsFlag
```

Definition at line 1477 of file [structs.h](#).

3.60.2.76 ggThreadsFlag

```
int M_const::ggThreadsFlag
```

Definition at line 1478 of file [structs.h](#).

3.60.2.77 gThreadBalancing

```
int M_const::gThreadBalancing
```

Definition at line 1479 of file [structs.h](#).

3.60.2.78 ggThreadBalancing

```
int M_const::ggThreadBalancing
```

Definition at line 1480 of file [structs.h](#).

3.60.2.79 gThreadSortFileSynch

```
int M_const::gThreadSortFileSynch
```

Definition at line 1481 of file [structs.h](#).

3.60.2.80 ggThreadSortFileSynch

```
int M_const::ggThreadSortFileSynch
```

Definition at line 1482 of file [structs.h](#).

3.60.2.81 gProcessStats

```
int M_const::gProcessStats
```

Definition at line 1483 of file [structs.h](#).

3.60.2.82 ggProcessStats

```
int M_const::ggProcessStats
```

Definition at line 1484 of file [structs.h](#).

3.60.2.83 gOldParallelStats

```
int M_const::gOldParallelStats
```

Definition at line 1485 of file [structs.h](#).

3.60.2.84 ggOldParallelStats

```
int M_const::ggOldParallelStats
```

Definition at line 1486 of file [structs.h](#).

3.60.2.85 maxFlevels

```
int M_const::maxFlevels
```

Definition at line 1487 of file [structs.h](#).

3.60.2.86 resetTimeOnClear

```
int M_const::resetTimeOnClear
```

Definition at line [1488](#) of file [structs.h](#).

3.60.2.87 gcNumDollars

```
int M_const::gcNumDollars
```

Definition at line [1489](#) of file [structs.h](#).

3.60.2.88 MultiRun

```
int M_const::MultiRun
```

Definition at line [1490](#) of file [structs.h](#).

3.60.2.89 gNoSpacesInNumbers

```
int M_const::gNoSpacesInNumbers
```

Definition at line [1491](#) of file [structs.h](#).

3.60.2.90 ggNoSpacesInNumbers

```
int M_const::ggNoSpacesInNumbers
```

Definition at line [1492](#) of file [structs.h](#).

3.60.2.91 gIsFortran90

```
int M_const::gIsFortran90
```

Definition at line [1493](#) of file [structs.h](#).

3.60.2.92 PrintTotalSize

```
int M_const::PrintTotalSize
```

Definition at line [1494](#) of file [structs.h](#).

3.60.2.93 fbufferSize

```
int M_const::fbufferSize
```

Definition at line [1495](#) of file [structs.h](#).

3.60.2.94 gOldFactArgFlag

```
int M_const::gOldFactArgFlag
```

Definition at line 1496 of file [structs.h](#).

3.60.2.95 ggOldFactArgFlag

```
int M_const::ggOldFactArgFlag
```

Definition at line 1497 of file [structs.h](#).

3.60.2.96 gnumextrasym

```
int M_const::gnumextrasym
```

Definition at line 1498 of file [structs.h](#).

3.60.2.97 ggnumextrasym

```
int M_const::ggnumextrasym
```

Definition at line 1499 of file [structs.h](#).

3.60.2.98 NumSpectatorFiles

```
int M_const::NumSpectatorFiles
```

Definition at line 1500 of file [structs.h](#).

3.60.2.99 SizeForSpectatorFiles

```
int M_const::SizeForSpectatorFiles
```

Definition at line 1501 of file [structs.h](#).

3.60.2.100 gOldGCDflag

```
int M_const::gOldGCDflag
```

Definition at line 1502 of file [structs.h](#).

3.60.2.101 ggOldGCDflag

```
int M_const::ggOldGCDflag
```

Definition at line 1503 of file [structs.h](#).

3.60.2.102 gWTimeStatsFlag

```
int M_const::gWTimeStatsFlag
```

Definition at line 1504 of file [structs.h](#).

3.60.2.103 ggWTimeStatsFlag

```
int M_const::ggWTimeStatsFlag
```

Definition at line 1505 of file [structs.h](#).

3.60.2.104 jumpratio

```
int M_const::jumpratio
```

Definition at line 1506 of file [structs.h](#).

3.60.2.105 MaxTal

```
WORD M_const::MaxTal
```

Definition at line 1507 of file [structs.h](#).

3.60.2.106 IndDum

```
WORD M_const::IndDum
```

Definition at line 1508 of file [structs.h](#).

3.60.2.107 DumInd

```
WORD M_const::DumInd
```

Definition at line 1509 of file [structs.h](#).

3.60.2.108 Willnd

```
WORD M_const::WilInd
```

Definition at line 1510 of file [structs.h](#).

3.60.2.109 gncmod

```
WORD M_const::gncmod
```

Definition at line 1511 of file [structs.h](#).

3.60.2.110 gnpowmod

WORD M_const::gnpowmod

Definition at line 1512 of file [structs.h](#).

3.60.2.111 gmodmode

WORD M_const::gmodmode

Definition at line 1513 of file [structs.h](#).

3.60.2.112 gUnitTrace

WORD M_const::gUnitTrace

Definition at line 1514 of file [structs.h](#).

3.60.2.113 gOutputMode

WORD M_const::gOutputMode

Definition at line 1515 of file [structs.h](#).

3.60.2.114 gOutputSpaces

WORD M_const::gOutputSpaces

Definition at line 1516 of file [structs.h](#).

3.60.2.115 gOutNumberType

WORD M_const::gOutNumberType

Definition at line 1517 of file [structs.h](#).

3.60.2.116 gCnumpows

WORD M_const::gCnumpows

Definition at line 1518 of file [structs.h](#).

3.60.2.117 gUniTrace

WORD M_const::gUniTrace[4]

Definition at line 1519 of file [structs.h](#).

3.60.2.118 MaxWildcards

WORD M_const::MaxWildcards

Definition at line 1520 of file [structs.h](#).

3.60.2.119 mTraceDum

WORD M_const::mTraceDum

Definition at line 1521 of file [structs.h](#).

3.60.2.120 OffsetIndex

WORD M_const::OffsetIndex

Definition at line 1522 of file [structs.h](#).

3.60.2.121 OffsetVector

WORD M_const::OffsetVector

Definition at line 1523 of file [structs.h](#).

3.60.2.122 RepMax

WORD M_const::RepMax

Definition at line 1524 of file [structs.h](#).

3.60.2.123 LogType

WORD M_const::LogType

Definition at line 1525 of file [structs.h](#).

3.60.2.124 ggStatsFlag

WORD M_const::ggStatsFlag

Definition at line 1526 of file [structs.h](#).

3.60.2.125 gLineLength

WORD M_const::gLineLength

Definition at line 1527 of file [structs.h](#).

3.60.2.126 qError

WORD M_const::qError

Definition at line 1528 of file [structs.h](#).

3.60.2.127 FortranCont

WORD M_const::FortranCont

Definition at line 1529 of file [structs.h](#).

3.60.2.128 HoldFlag

WORD M_const::HoldFlag

Definition at line 1530 of file [structs.h](#).

3.60.2.129 Ordering

WORD M_const::Ordering[15]

Definition at line 1531 of file [structs.h](#).

3.60.2.130 silent

WORD M_const::silent

Definition at line 1532 of file [structs.h](#).

3.60.2.131 tracebackflag

WORD M_const::tracebackflag

Definition at line 1533 of file [structs.h](#).

3.60.2.132 expnum

WORD M_const::expnum

Definition at line 1534 of file [structs.h](#).

3.60.2.133 denomnum

WORD M_const::denomnum

Definition at line 1535 of file [structs.h](#).

3.60.2.134 facnum

WORD M_const::facnum

Definition at line 1536 of file [structs.h](#).

3.60.2.135 invfacnum

WORD M_const::invfacnum

Definition at line 1537 of file [structs.h](#).

3.60.2.136 sumnum

WORD M_const::sumnum

Definition at line 1538 of file [structs.h](#).

3.60.2.137 sumpnum

WORD M_const::sumpnum

Definition at line 1539 of file [structs.h](#).

3.60.2.138 OldOrderFlag

WORD M_const::OldOrderFlag

Definition at line 1540 of file [structs.h](#).

3.60.2.139 termfunnum

WORD M_const::termfunnum

Definition at line 1541 of file [structs.h](#).

3.60.2.140 matchfunnum

WORD M_const::matchfunnum

Definition at line 1542 of file [structs.h](#).

3.60.2.141 countfunnum

WORD M_const::countfunnum

Definition at line 1543 of file [structs.h](#).

3.60.2.142 gPolyFun

WORD M_const::gPolyFun

Definition at line 1544 of file [structs.h](#).

3.60.2.143 gPolyFunInv

WORD M_const::gPolyFunInv

Definition at line 1545 of file [structs.h](#).

3.60.2.144 gPolyFunType

WORD M_const::gPolyFunType

Definition at line 1546 of file [structs.h](#).

3.60.2.145 gPolyFunExp

WORD M_const::gPolyFunExp

Definition at line 1547 of file [structs.h](#).

3.60.2.146 gPolyFunVar

WORD M_const::gPolyFunVar

Definition at line 1548 of file [structs.h](#).

3.60.2.147 gPolyFunPow

WORD M_const::gPolyFunPow

Definition at line 1549 of file [structs.h](#).

3.60.2.148 dollarzero

WORD M_const::dollarzero

Definition at line 1550 of file [structs.h](#).

3.60.2.149 atstartup

WORD M_const::atstartup

Definition at line 1551 of file [structs.h](#).

3.60.2.150 exitflag

WORD M_const::exitflag

Definition at line 1552 of file [structs.h](#).

3.60.2.151 NumStoreCaches

WORD M_const::NumStoreCaches

Definition at line 1553 of file [structs.h](#).

3.60.2.152 gIndentSpace

WORD M_const::gIndentSpace

Definition at line 1554 of file [structs.h](#).

3.60.2.153 ggIndentSpace

WORD M_const::ggIndentSpace

Definition at line 1555 of file [structs.h](#).

3.60.2.154 gShortStatsMax

WORD M_const::gShortStatsMax

For On FewerStatistics 10;

Definition at line 1556 of file [structs.h](#).

3.60.2.155 ggShortStatsMax

WORD M_const::ggShortStatsMax

For On FewerStatistics 10;

Definition at line 1557 of file [structs.h](#).

3.60.2.156 gextrasymbols

WORD M_const::gextrasymbols

Definition at line 1558 of file [structs.h](#).

3.60.2.157 ggextrasyms

WORD M_const::ggextrasyms

Definition at line 1559 of file [structs.h](#).

3.60.2.158 zerorhs

WORD M_const::zerorhs

Definition at line 1560 of file [structs.h](#).

3.60.2.159 onerhs

WORD M_const::onerhs

Definition at line 1561 of file [structs.h](#).

3.60.2.160 havessortdir

WORD M_const::havessortdir

Definition at line 1562 of file [structs.h](#).

3.60.2.161 vectorzero

WORD M_const::vectorzero

Definition at line 1563 of file [structs.h](#).

3.60.2.162 ClearStore

WORD M_const::ClearStore

Definition at line 1564 of file [structs.h](#).

3.60.2.163 BracketFactors

WORD M_const::BracketFactors[8]

Definition at line 1565 of file [structs.h](#).

3.60.2.164 FromStdin

BOOL M_const::FromStdin

Definition at line 1566 of file [structs.h](#).

3.60.2.165 IgnoreDeprecation

```
BOOL M_const::IgnoreDeprecation
```

Definition at line 1567 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.61 MCBLOCK Class Reference

Public Member Functions

- void [init](#) (void)

Data Fields

- Edge2n * [edges](#)
- int [nedges](#)
- int [nartps](#)
- int [loop](#)
- int [DUMMYPADDING](#)

3.61.1 Detailed Description

Definition at line 985 of file [grcc.h](#).

3.61.2 Constructor & Destructor Documentation

3.61.2.1 MCBLOCK()

```
MCBlock::MCBlock (  
    void )
```

Definition at line 5510 of file [grcc.cc](#).

3.61.2.2 ~MCBlock()

```
MCBlock::~MCBlock (  
    void )
```

Definition at line 5516 of file [grcc.cc](#).

3.61.3 Member Function Documentation

3.61.3.1 init()

```
void MCBLOCK::init (
    void )
```

Definition at line 5521 of file [grcc.cc](#).

3.61.4 Field Documentation

3.61.4.1 edges

```
Edge2n* MCBLOCK::edges
```

Definition at line 987 of file [grcc.h](#).

3.61.4.2 nmedges

```
int MCBLOCK::nmedges
```

Definition at line 988 of file [grcc.h](#).

3.61.4.3 nartps

```
int MCBLOCK::nartps
```

Definition at line 989 of file [grcc.h](#).

3.61.4.4 loop

```
int MCBLOCK::loop
```

Definition at line 990 of file [grcc.h](#).

3.61.4.5 DUMMYPADDING

```
int MCBLOCK::DUMMYPADDING
```

Definition at line 992 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.62 MCBridge Class Reference

Data Fields

- Edge2n [nodes](#)
- int [next](#)

3.62.1 Detailed Description

Definition at line [973](#) of file [grcc.h](#).

3.62.2 Constructor & Destructor Documentation

3.62.2.1 MCBridge()

```
MCBridge::MCBridge (  
    void )
```

Definition at line [5498](#) of file [grcc.cc](#).

3.62.2.2 ~MCBridge()

```
MCBridge::~~MCBridge (  
    void )
```

Definition at line [5503](#) of file [grcc.cc](#).

3.62.3 Field Documentation

3.62.3.1 nodes

```
Edge2n MCBridge::nodes
```

Definition at line [975](#) of file [grcc.h](#).

3.62.3.2 next

```
int MCBridge::next
```

Definition at line [976](#) of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.63 MCEdge Class Reference

Data Fields

- Edge2n [nodes](#)
- ULong [momset](#)
- int [momdir](#)
- int [DUMMYPADDING](#)

3.63.1 Detailed Description

Definition at line [936](#) of file [grcc.h](#).

3.63.2 Constructor & Destructor Documentation

3.63.2.1 MCEdge()

```
MCEdge::MCEdge (  
    void )
```

Definition at line [5457](#) of file [grcc.cc](#).

3.63.2.2 ~MCEdge()

```
MCEdge::~MCEdge (  
    void )
```

Definition at line [5463](#) of file [grcc.cc](#).

3.63.3 Field Documentation

3.63.3.1 nodes

```
Edge2n MCEdge::nodes
```

Definition at line [938](#) of file [grcc.h](#).

3.63.3.2 momset

```
ULong MCEdge::momset
```

Definition at line [939](#) of file [grcc.h](#).

3.63.3.3 momdir

```
int MCEdge::momdir
```

Definition at line 940 of file [grcc.h](#).

3.63.3.4 DUMMYPADDING

```
int MCEdge::DUMMYPADDING
```


Definition at line 942 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.64 MConn Class Reference

Collaboration diagram for MConn:

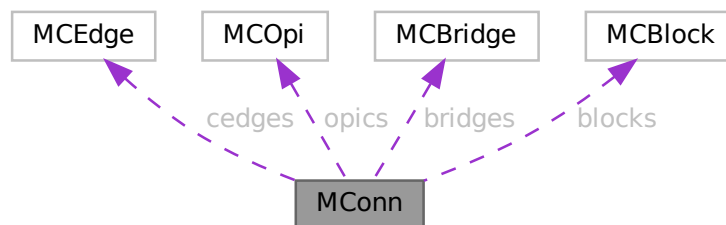

Public Member Functions

- [MConn](#) (int nnod, int nedg)
- void [init](#) (void)
- void [initCEdges](#) (MGraph *)
- void [pushNode](#) (int nd)
- void [pushEdge](#) (int n0, int n1)
- void [addCEdge](#) (int n0, int n1, ULong momset)
- void [addOPic](#) (MCOpi *mopi, int stp)
- void [addBridge](#) (int n0, int n1, int nex, int nextot)
- void [addArtic](#) (int nd, int mul)
- void [addBlock](#) (MCBlock *eblk, int stp)
- void [addBlockSelf](#) (int nd, int mul)
- void [print](#) (void)
- void [prEdges](#) (void)

Data Fields

- [MCEdge](#) * [cedges](#)
- [MCOpi](#) * [opics](#)
- [MCBridge](#) * [bridges](#)
- [MCBlock](#) * [blocks](#)
- int * [articuls](#)
- int * [opisp](#)
- int * [opistk](#)
- [Edge2n](#) * [blksp](#)
- [Edge2n](#) * [blkstk](#)
- int [snodes](#)
- int [sedges](#)
- int [nopic](#)
- int [nlpopic](#)
- int [nctopic](#)
- int [nbacked](#)
- int [nbridges](#)
- int [ne0bridges](#)
- int [ne1bridges](#)
- int [nselfloops](#)
- int [nmultiedges](#)
- int [nblocks](#)
- int [na1blocks](#)
- int [narticuls](#)
- int [neblocks](#)
- int [nopisp](#)
- int [opistkptr](#)
- int [nblksp](#)
- int [blkstkptr](#)
- int [DUMMYPADDING](#)

3.64.1 Detailed Description

Definition at line [1002](#) of file [grcc.h](#).

3.64.2 Constructor & Destructor Documentation

3.64.2.1 MConn()

```
MConn::MConn (
    int nnod,
    int nedg )
```

Definition at line [5532](#) of file [grcc.cc](#).

3.64.2.2 ~MConn()

```
MConn::~MConn (
    void )
```

Definition at line [5555](#) of file [grcc.cc](#).

3.64.3 Member Function Documentation

3.64.3.1 init()

```
void MConn::init (
    void )
```

Definition at line 5570 of file [grcc.cc](#).

3.64.3.2 initCEdges()

```
void MConn::initCEdges (
    MGraph * mg )
```

Definition at line 5627 of file [grcc.cc](#).

3.64.3.3 pushNode()

```
void MConn::pushNode (
    int nd )
```

Definition at line 5601 of file [grcc.cc](#).

3.64.3.4 pushEdge()

```
void MConn::pushEdge (
    int n0,
    int n1 )
```

Definition at line 5610 of file [grcc.cc](#).

3.64.3.5 addCEdge()

```
void MConn::addCEdge (
    int n0,
    int n1,
    ULong momset )
```

Definition at line 5653 of file [grcc.cc](#).

3.64.3.6 addOPlc()

```
void MConn::addOPlc (
    MOpI * mopi,
    int stp )
```

Definition at line 5677 of file [grcc.cc](#).

3.64.3.7 addBridge()

```
void MConn::addBridge (
    int n0,
    int n1,
    int nex,
    int nextot )
```

Definition at line 5704 of file [grcc.cc](#).

3.64.3.8 addArtic()

```
void MConn::addArtic (
    int nd,
    int mul )
```

Definition at line 5721 of file [grcc.cc](#).

3.64.3.9 addBlock()

```
void MConn::addBlock (
    MCBLOCK * eblk,
    int stp )
```

Definition at line 5732 of file [grcc.cc](#).

3.64.3.10 addBlockSelf()

```
void MConn::addBlockSelf (
    int nd,
    int mul )
```

Definition at line 5756 of file [grcc.cc](#).

3.64.3.11 print()

```
void MConn::print (
    void )
```

Definition at line 5774 of file [grcc.cc](#).

3.64.3.12 prEdges()

```
void MConn::prEdges (
    void )
```

Definition at line 5847 of file [grcc.cc](#).

3.64.4 Field Documentation

3.64.4.1 cedges

`MCEdge*` `MConn::cedges`

Definition at line 1005 of file [grcc.h](#).

3.64.4.2 opics

`MCOp*` `MConn::opics`

Definition at line 1006 of file [grcc.h](#).

3.64.4.3 bridges

`MCBridge*` `MConn::bridges`

Definition at line 1007 of file [grcc.h](#).

3.64.4.4 blocks

`MCBlock*` `MConn::blocks`

Definition at line 1008 of file [grcc.h](#).

3.64.4.5 articuls

`int*` `MConn::articuls`

Definition at line 1009 of file [grcc.h](#).

3.64.4.6 opisp

`int*` `MConn::opisp`

Definition at line 1011 of file [grcc.h](#).

3.64.4.7 opistk

`int*` `MConn::opistk`

Definition at line 1012 of file [grcc.h](#).

3.64.4.8 blksp

Edge2n* MConn::blksp

Definition at line 1013 of file [grcc.h](#).

3.64.4.9 blkstk

Edge2n* MConn::blkstk

Definition at line 1014 of file [grcc.h](#).

3.64.4.10 snodes

int MConn::snodes

Definition at line 1015 of file [grcc.h](#).

3.64.4.11 sedges

int MConn::sedges

Definition at line 1016 of file [grcc.h](#).

3.64.4.12 nopic

int MConn::nopic

Definition at line 1019 of file [grcc.h](#).

3.64.4.13 nlpopic

int MConn::nlpopic

Definition at line 1020 of file [grcc.h](#).

3.64.4.14 nctopic

int MConn::nctopic

Definition at line 1021 of file [grcc.h](#).

3.64.4.15 nbacked

int MConn::nbacked

Definition at line 1024 of file [grcc.h](#).

3.64.4.16 nbridges

```
int MConn::nbridges
```

Definition at line 1027 of file [grcc.h](#).

3.64.4.17 ne0bridges

```
int MConn::ne0bridges
```

Definition at line 1028 of file [grcc.h](#).

3.64.4.18 ne1bridges

```
int MConn::ne1bridges
```

Definition at line 1029 of file [grcc.h](#).

3.64.4.19 nselfloops

```
int MConn::nselfloops
```

Definition at line 1030 of file [grcc.h](#).

3.64.4.20 nmultiedges

```
int MConn::nmultiedges
```

Definition at line 1031 of file [grcc.h](#).

3.64.4.21 nblocks

```
int MConn::nblocks
```

Definition at line 1034 of file [grcc.h](#).

3.64.4.22 na1blocks

```
int MConn::na1blocks
```

Definition at line 1035 of file [grcc.h](#).

3.64.4.23 narticuls

```
int MConn::narticuls
```

Definition at line 1036 of file [grcc.h](#).

3.64.4.24 neblocks

```
int MConn::neblocks
```

Definition at line 1037 of file [grcc.h](#).

3.64.4.25 nopisp

```
int MConn::nopisp
```

Definition at line 1040 of file [grcc.h](#).

3.64.4.26 opistkptr

```
int MConn::opistkptr
```

Definition at line 1041 of file [grcc.h](#).

3.64.4.27 nblksp

```
int MConn::nblksp
```

Definition at line 1042 of file [grcc.h](#).

3.64.4.28 blkstkptr

```
int MConn::blkstkptr
```

Definition at line 1043 of file [grcc.h](#).

3.64.4.29 DUMMY_PADDING

```
int MConn::DUMMY_PADDING
```

Definition at line 1045 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.65 MCOpI Class Reference

Public Member Functions

- void [init](#) (void)

Data Fields

- int * [nodes](#)
- int [nnodes](#)
- int [nlegs](#)
- int [next](#)
- int [nedges](#)
- int [loop](#)
- int [ctloop](#)
- int [mom0lg](#)
- int [DUMMY_PADDING](#)

3.65.1 Detailed Description

Definition at line [951](#) of file [grcc.h](#).

3.65.2 Constructor & Destructor Documentation

3.65.2.1 MCOpI()

```
MCOpI::MCOpI (  
    void )
```

Definition at line [5471](#) of file [grcc.cc](#).

3.65.2.2 ~MCOpI()

```
MCOpI::~~MCOpI (  
    void )
```

Definition at line [5477](#) of file [grcc.cc](#).

3.65.3 Member Function Documentation

3.65.3.1 init()

```
void MCOpI::init (  
    void )
```

Definition at line [5483](#) of file [grcc.cc](#).

3.65.4 Field Documentation

3.65.4.1 nodes

```
int* MCOpI::nodes
```

Definition at line [953](#) of file [grcc.h](#).

3.65.4.2 nnodes

```
int MCOpI::nnodes
```

Definition at line 954 of file [grcc.h](#).

3.65.4.3 nlegs

```
int MCOpI::nlegs
```

Definition at line 955 of file [grcc.h](#).

3.65.4.4 next

```
int MCOpI::next
```

Definition at line 956 of file [grcc.h](#).

3.65.4.5 nedges

```
int MCOpI::nedges
```

Definition at line 957 of file [grcc.h](#).

3.65.4.6 loop

```
int MCOpI::loop
```

Definition at line 958 of file [grcc.h](#).

3.65.4.7 ctloop

```
int MCOpI::ctloop
```

Definition at line 959 of file [grcc.h](#).

3.65.4.8 mom0lg

```
int MCOpI::mom0lg
```

Definition at line 960 of file [grcc.h](#).

3.65.4.9 DUMMYPADDING

```
int MCOpi::DUMMYPADDING
```


Definition at line 962 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.66 MGraph Class Reference

Collaboration diagram for MGraph:

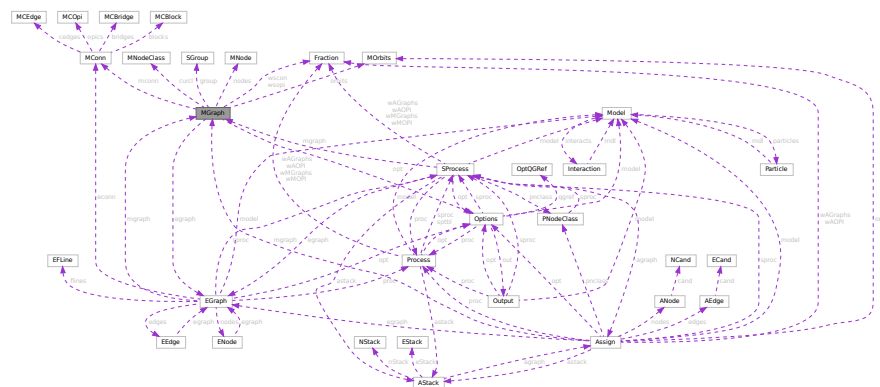

Public Member Functions

- [MGraph](#) (int pid, int ncl, [NCInput](#) *mgi, [Options](#) *opt)
- [MGraph](#) (int pid, int ncl, int *cldeg, int *clnum, int *clexl, int *cmind, int *cmxd, [Options](#) *opt)
- void [init](#) (void)
- [BigInt](#) [generate](#) (void)
- [Bool](#) [isExternal](#) (int nd)
- void [printAdjMat](#) ([MNodeClass](#) *cl)
- void [print](#) (void)
- void [printPy](#) (FILE *fp, long mld)
- [Bool](#) [isConnected](#) (void)
- [Bool](#) [visit](#) (int nd)
- [Bool](#) [isIsomorphic](#) ([MNodeClass](#) *cl)
- void [permMat](#) (int size, int *perm, int **mat0, int **mat1)
- int [compMat](#) (int size, int **mat0, int **mat1)
- [MNodeClass](#) * [refineClass](#) ([MNodeClass](#) *cl)
- void [bisearchME](#) (int nd, int pd, int ned, int col, [MCOpi](#) *mopi, [MCBlock](#) *mblk, [ULong](#) *momset, int *next, int *nart)
- void [biconnME](#) (void)
- [Bool](#) [isOptM](#) (void)
- void [connectClass](#) ([MNodeClass](#) *cl)
- void [connectNode](#) (int sc, int ss, [MNodeClass](#) *cl)
- void [connectLeg](#) (int sc, int sn, int tc, int ts, [MNodeClass](#) *cl)
- void [newGraph](#) ([MNodeClass](#) *cl)

Data Fields

- [Options](#) * [opt](#)
- [SGroup](#) * [group](#)
- [MOrbits](#) * [orbits](#)
- [MNode](#) ** [nodes](#)
- [BigInt](#) [mld](#)
- [int](#) * [clist](#)
- [int](#) [pld](#)
- [int](#) [nNodes](#)
- [int](#) [nEdges](#)
- [int](#) [nLoops](#)
- [int](#) [nExtern](#)
- [int](#) [nClasses](#)
- [int](#) [mindeg](#)
- [int](#) [maxdeg](#)
- [int](#) ** [adjMat](#)
- [MNodeClass](#) * [curcl](#)
- [EGraph](#) * [egraph](#)
- [BigInt](#) [nsym](#)
- [BigInt](#) [esym](#)
- [BigInt](#) [cDiag](#)
- [BigInt](#) [c1PI](#)
- [BigInt](#) [cNoTadpole](#)
- [BigInt](#) [cNoTadBlock](#)
- [BigInt](#) [c1PINoTadBlock](#)
- [Fraction](#) [wscon](#)
- [Fraction](#) [wsopi](#)
- [BigInt](#) [ngen](#)
- [BigInt](#) [ngconn](#)
- [BigInt](#) [nCallRefine](#)
- [BigInt](#) [discardRefine](#)
- [BigInt](#) [discardDisc](#)
- [BigInt](#) [discardIso](#)
- [Bool](#) [opi](#)
- [Bool](#) [opiloop](#)
- [Bool](#) [extself](#)
- [Bool](#) [selfloop](#)
- [Bool](#) [multiedge](#)
- [Bool](#) [tadpole](#)
- [Bool](#) [tadblock](#)
- [Bool](#) [block](#)
- [Bool](#) [bipart](#)
- [int](#) [DUMMYPADDING1](#)
- [MConn](#) * [mconn](#)
- [int](#) ** [modmat](#)
- [int](#) * [bidef](#)
- [int](#) * [bilow](#)
- [int](#) * [bicol](#)
- [int](#) [bicount](#)
- [int](#) [DUMMYPADDING2](#)

3.66.1 Detailed Description

Definition at line 793 of file [grcc.h](#).

3.66.2 Constructor & Destructor Documentation

3.66.2.1 MGraph() [1/2]

```
MGraph::MGraph (
    int pid,
    int ncl,
    NCInput * mg,
    Options * opt )
```

Definition at line 4072 of file [grcc.cc](#).

3.66.2.2 MGraph() [2/2]

```
MGraph::MGraph (
    int pid,
    int ncl,
    int * cldeg,
    int * clnum,
    int * cllexl,
    int * cmind,
    int * cmaxd,
    Options * opt )
```

Definition at line 4004 of file [grcc.cc](#).

3.66.2.3 ~MGraph()

```
MGraph::~MGraph (
    void )
```

Definition at line 4188 of file [grcc.cc](#).

3.66.3 Member Function Documentation

3.66.3.1 init()

```
void MGraph::init (
    void )
```

Definition at line 4144 of file [grcc.cc](#).

3.66.3.2 generate()

```
BigInt MGraph::generate (
    void )
```

Definition at line 4959 of file [grcc.cc](#).

3.66.3.3 isExternal()

```
Bool MGraph::isExternal (
    int nd ) [inline]
```

Definition at line 876 of file [grcc.h](#).

3.66.3.4 printAdjMat()

```
void MGraph::printAdjMat (
    MNodeClass * cl )
```

Definition at line 4218 of file [grcc.cc](#).

3.66.3.5 print()

```
void MGraph::print (
    void )
```

Definition at line 4237 of file [grcc.cc](#).

3.66.3.6 printPy()

```
void MGraph::printPy (
    FILE * fp,
    long mId )
```

Definition at line 4261 of file [grcc.cc](#).

3.66.3.7 isConnected()

```
Bool MGraph::isConnected (
    void )
```

Definition at line 4292 of file [grcc.cc](#).

3.66.3.8 visit()

```
Bool MGraph::visit (
    int nd )
```

Definition at line 4316 of file [grcc.cc](#).

3.66.3.9 isIsomorphic()

```
Bool MGraph::isIsomorphic (
    MNodeClass * cl )
```

Definition at line 4341 of file [grcc.cc](#).

3.66.3.10 permMat()

```
void MGraph::permMat (
    int size,
    int * perm,
    int ** mat0,
    int ** mat1 )
```

Definition at line [4399](#) of file [grcc.cc](#).

3.66.3.11 compMat()

```
int MGraph::compMat (
    int size,
    int ** mat0,
    int ** mat1 )
```

Definition at line [4413](#) of file [grcc.cc](#).

3.66.3.12 refineClass()

```
MNodeClass * MGraph::refineClass (
    MNodeClass * cl )
```

Definition at line [4431](#) of file [grcc.cc](#).

3.66.3.13 bisearchME()

```
void MGraph::bisearchME (
    int nd,
    int pd,
    int ned,
    int col,
    MCOpi * mopi,
    MCBlock * mblk,
    ULong * momset,
    int * next,
    int * nart )
```

Definition at line [4638](#) of file [grcc.cc](#).

3.66.3.14 biconnME()

```
void MGraph::biconnME (
    void )
```

Definition at line [4513](#) of file [grcc.cc](#).

3.66.3.15 isOptM()

```
Bool MGraph::isOptM (
    void )
```

Definition at line 5170 of file [grcc.cc](#).

3.66.3.16 connectClass()

```
void MGraph::connectClass (
    MNodeClass * cl )
```

Definition at line 4978 of file [grcc.cc](#).

3.66.3.17 connectNode()

```
void MGraph::connectNode (
    int sc,
    int ss,
    MNodeClass * cl )
```

Definition at line 5006 of file [grcc.cc](#).

3.66.3.18 connectLeg()

```
void MGraph::connectLeg (
    int sc,
    int sn,
    int tc,
    int ts,
    MNodeClass * cl )
```

Definition at line 5023 of file [grcc.cc](#).

3.66.3.19 newGraph()

```
void MGraph::newGraph (
    MNodeClass * cl )
```

Definition at line 5236 of file [grcc.cc](#).

3.66.4 Field Documentation

3.66.4.1 opt

```
Options* MGraph::opt
```

Definition at line 798 of file [grcc.h](#).

3.66.4.2 group

`SGroup* MGraph::group`

Definition at line 801 of file [grcc.h](#).

3.66.4.3 orbits

`MOrbits* MGraph::orbits`

Definition at line 802 of file [grcc.h](#).

3.66.4.4 nodes

`MNode** MGraph::nodes`

Definition at line 804 of file [grcc.h](#).

3.66.4.5 mId

`BigInt MGraph::mId`

Definition at line 805 of file [grcc.h](#).

3.66.4.6 clist

`int* MGraph::clist`

Definition at line 806 of file [grcc.h](#).

3.66.4.7 pId

`int MGraph::pId`

Definition at line 807 of file [grcc.h](#).

3.66.4.8 nNodes

`int MGraph::nNodes`

Definition at line 808 of file [grcc.h](#).

3.66.4.9 nEdges

`int MGraph::nEdges`

Definition at line 809 of file [grcc.h](#).

3.66.4.10 nLoops

```
int MGraph::nLoops
```

Definition at line 810 of file [grcc.h](#).

3.66.4.11 nExtern

```
int MGraph::nExtern
```

Definition at line 811 of file [grcc.h](#).

3.66.4.12 nClasses

```
int MGraph::nClasses
```

Definition at line 812 of file [grcc.h](#).

3.66.4.13 mindeg

```
int MGraph::mindeg
```

Definition at line 813 of file [grcc.h](#).

3.66.4.14 maxdeg

```
int MGraph::maxdeg
```

Definition at line 814 of file [grcc.h](#).

3.66.4.15 adjMat

```
int** MGraph::adjMat
```

Definition at line 817 of file [grcc.h](#).

3.66.4.16 curcl

```
MNodeClass* MGraph::curcl
```

Definition at line 818 of file [grcc.h](#).

3.66.4.17 egraph

```
EGraph* MGraph::egraph
```

Definition at line 819 of file [grcc.h](#).

3.66.4.18 nsym

`BigInt MGraph::nsym`

Definition at line 820 of file [grcc.h](#).

3.66.4.19 esym

`BigInt MGraph::esym`

Definition at line 821 of file [grcc.h](#).

3.66.4.20 cDiag

`BigInt MGraph::cDiag`

Definition at line 824 of file [grcc.h](#).

3.66.4.21 c1PI

`BigInt MGraph::c1PI`

Definition at line 825 of file [grcc.h](#).

3.66.4.22 cNoTadpole

`BigInt MGraph::cNoTadpole`

Definition at line 826 of file [grcc.h](#).

3.66.4.23 cNoTadBlock

`BigInt MGraph::cNoTadBlock`

Definition at line 827 of file [grcc.h](#).

3.66.4.24 c1PINoTadBlock

`BigInt MGraph::c1PINoTadBlock`

Definition at line 828 of file [grcc.h](#).

3.66.4.25 wscon

`Fraction MGraph::wscon`

Definition at line 829 of file [grcc.h](#).

3.66.4.26 wsopi

`Fraction MGraph::wsopi`

Definition at line 830 of file [grcc.h](#).

3.66.4.27 ngen

`BigInt MGraph::ngen`

Definition at line 833 of file [grcc.h](#).

3.66.4.28 ngconn

`BigInt MGraph::ngconn`

Definition at line 834 of file [grcc.h](#).

3.66.4.29 nCallRefine

`BigInt MGraph::nCallRefine`

Definition at line 836 of file [grcc.h](#).

3.66.4.30 discardRefine

`BigInt MGraph::discardRefine`

Definition at line 837 of file [grcc.h](#).

3.66.4.31 discardDisc

`BigInt MGraph::discardDisc`

Definition at line 838 of file [grcc.h](#).

3.66.4.32 discardIso

`BigInt MGraph::discardIso`

Definition at line 839 of file [grcc.h](#).

3.66.4.33 opi

`Bool MGraph::opi`

Definition at line 842 of file [grcc.h](#).

3.66.4.34 opiloop

Bool MGraph::opiloop

Definition at line 843 of file [grcc.h](#).

3.66.4.35 extself

Bool MGraph::extself

Definition at line 844 of file [grcc.h](#).

3.66.4.36 selfloop

Bool MGraph::selfloop

Definition at line 845 of file [grcc.h](#).

3.66.4.37 multiedge

Bool MGraph::multiedge

Definition at line 846 of file [grcc.h](#).

3.66.4.38 tadpole

Bool MGraph::tadpole

Definition at line 847 of file [grcc.h](#).

3.66.4.39 tadbblock

Bool MGraph::tadbblock

Definition at line 848 of file [grcc.h](#).

3.66.4.40 block

Bool MGraph::block

Definition at line 849 of file [grcc.h](#).

3.66.4.41 bipart

Bool MGraph::bipart

Definition at line 850 of file [grcc.h](#).

3.66.4.42 DUMMYPADDING1

```
int MGraph::DUMMYPADDING1
```

Definition at line 852 of file [grcc.h](#).

3.66.4.43 mconn

```
MConn* MGraph::mconn
```

Definition at line 855 of file [grcc.h](#).

3.66.4.44 modmat

```
int** MGraph::modmat
```

Definition at line 858 of file [grcc.h](#).

3.66.4.45 bidef

```
int* MGraph::bidef
```

Definition at line 861 of file [grcc.h](#).

3.66.4.46 bilow

```
int* MGraph::bilow
```

Definition at line 862 of file [grcc.h](#).

3.66.4.47 bicol

```
int* MGraph::bicol
```

Definition at line 863 of file [grcc.h](#).

3.66.4.48 bicount

```
int MGraph::bicount
```

Definition at line 864 of file [grcc.h](#).

3.66.4.49 DUMMYPADDING2

```
int MGraph::DUMMYPADDING2
```

Definition at line 866 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.67 MiNmAx Struct Reference

Data Fields

- WORD [mini](#)
- WORD [maxi](#)
- WORD [size](#)

3.67.1 Detailed Description

Definition at line 301 of file [structs.h](#).

3.67.2 Field Documentation

3.67.2.1 mini

```
WORD MiNmAx::mini
```

Minimum value

Definition at line 302 of file [structs.h](#).

3.67.2.2 maxi

```
WORD MiNmAx::maxi
```

Maximum value

Definition at line 303 of file [structs.h](#).

3.67.2.3 size

```
WORD MinMax::size
```

Value of one unit in this position.

Definition at line 304 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.68 MInput Struct Reference

Data Fields

- const char * [name](#)
- int [defpart](#)
- int [ncouple](#)
- const char * [cnamlist](#) [GRCC_MAXNCPLG]

3.68.1 Detailed Description

Definition at line 175 of file [grccparam.h](#).

3.68.2 Field Documentation

3.68.2.1 name

```
const char* MInput::name
```

Definition at line 176 of file [grccparam.h](#).

3.68.2.2 defpart

```
int MInput::defpart
```

Definition at line 177 of file [grccparam.h](#).

3.68.2.3 ncouple

```
int MInput::ncouple
```

Definition at line 179 of file [grccparam.h](#).

3.68.2.4 cnamlist

```
const char* MInput::cnamlist[GRCC_MAXNCPLG]
```

Definition at line 180 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.69 MNode Class Reference

Public Member Functions

- [MNode](#) (int id, int clss, [NCInput](#) *mgi)
- [MNode](#) (int id, int deg, int extloop, int clss, int cmind, int cmaxd)

Data Fields

- int [id](#)
- int [deg](#)
- int [clss](#)
- int [extloop](#)
- int [cminddeg](#)
- int [cmaxdeg](#)
- int [freelg](#)
- int [visited](#)

3.69.1 Detailed Description

Definition at line 771 of file [grcc.h](#).

3.69.2 Constructor & Destructor Documentation

3.69.2.1 MNode() [1/2]

```
MNode::MNode (
    int id,
    int clss,
    NCInput * mgi )
```

Definition at line 3966 of file [grcc.cc](#).

3.69.2.2 MNode() [2/2]

```
MNode::MNode (
    int id,
    int deg,
    int extloop,
    int cls,
    int cmindeg,
    int cmaxdeg )
```

Definition at line [3984](#) of file [grcc.cc](#).

3.69.3 Field Documentation

3.69.3.1 id

```
int MNode::id
```

Definition at line [773](#) of file [grcc.h](#).

3.69.3.2 deg

```
int MNode::deg
```

Definition at line [774](#) of file [grcc.h](#).

3.69.3.3 cls

```
int MNode::cls
```

Definition at line [775](#) of file [grcc.h](#).

3.69.3.4 extloop

```
int MNode::extloop
```

Definition at line [776](#) of file [grcc.h](#).

3.69.3.5 cmindeg

```
int MNode::cmindeg
```

Definition at line [777](#) of file [grcc.h](#).

3.69.3.6 cmaxdeg

```
int MNode::cmaxdeg
```

Definition at line 778 of file [grcc.h](#).

3.69.3.7 freelg

```
int MNode::freelg
```

Definition at line 780 of file [grcc.h](#).

3.69.3.8 visited

```
int MNode::visited
```

Definition at line 781 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.70 MNodeClass Class Reference

Public Member Functions

- [MNodeClass](#) (int nnodes, int nclasses)
- void [init](#) (int *cl, int mxdeg, int **adjmat)
- void [copy](#) ([MNodeClass](#) *mnc)
- int [clCmp](#) (int nd0, int nd1, int cn)
- void [printMat](#) (void)
- void [mkFlist](#) (void)
- void [mkNdCl](#) (void)
- void [mkClMat](#) (int **adjmat)
- void [incMat](#) (int nd, int td, int val)
- int [cmpMNCArray](#) (int *a0, int *a1, int ma)
- void [reorder](#) ([MGraph](#) *mg)

Data Fields

- int [clmat](#) [GRCC_MAXNODES][GRCC_MAXNODES]
- int [clist](#) [GRCC_MAXNODES]
- int [ndcl](#) [GRCC_MAXNODES]
- int [flist](#) [GRCC_MAXNODES+1]
- int [clord](#) [GRCC_MAXNODES]
- int [cmindeg](#) [GRCC_MAXNODES]
- int [cmaxdeg](#) [GRCC_MAXNODES]
- int [nNodes](#)
- int [nClasses](#)
- int [maxdeg](#)
- int [flg0](#)
- int [flg1](#)
- int [flg2](#)

3.70.1 Detailed Description

Definition at line 900 of file [grcc.h](#).

3.70.2 Constructor & Destructor Documentation

3.70.2.1 MNodeClass()

```
MNodeClass::MNodeClass (
    int nnodes,
    int nclasses )
```

Definition at line 3719 of file [grcc.cc](#).

3.70.2.2 ~MNodeClass()

```
MNodeClass::~MNodeClass (
    void )
```

Definition at line 3748 of file [grcc.cc](#).

3.70.3 Member Function Documentation

3.70.3.1 init()

```
void MNodeClass::init (
    int * cl,
    int mxdeg,
    int ** adjmat )
```

Definition at line 3755 of file [grcc.cc](#).

3.70.3.2 copy()

```
void MNodeClass::copy (
    MNodeClass * mnc )
```

Definition at line 3779 of file [grcc.cc](#).

3.70.3.3 clCmp()

```
int MNodeClass::clCmp (
    int nd0,
    int nd1,
    int cn )
```

Definition at line 3835 of file [grcc.cc](#).

3.70.3.4 printMat()

```
void MNodeClass::printMat (
    void )
```

Definition at line [3886](#) of file [grcc.cc](#).

3.70.3.5 mkFlist()

```
void MNodeClass::mkFlist (
    void )
```

Definition at line [3803](#) of file [grcc.cc](#).

3.70.3.6 mkNdCl()

```
void MNodeClass::mkNdCl (
    void )
```

Definition at line [3819](#) of file [grcc.cc](#).

3.70.3.7 mkClMat()

```
void MNodeClass::mkClMat (
    int ** adjmat )
```

Definition at line [3857](#) of file [grcc.cc](#).

3.70.3.8 incMat()

```
void MNodeClass::incMat (
    int nd,
    int td,
    int val )
```

Definition at line [3877](#) of file [grcc.cc](#).

3.70.3.9 cmpMNCArray()

```
int MNodeClass::cmpMNCArray (
    int * a0,
    int * a1,
    int ma )
```

Definition at line [3917](#) of file [grcc.cc](#).

3.70.3.10 reorder()

```
void MNodeClass::reorder (
    MGraph * mg )
```

Definition at line 3933 of file [grcc.cc](#).

3.70.4 Field Documentation

3.70.4.1 clmat

```
int MNodeClass::clmat[GRCC_MAXNODES][GRCC_MAXNODES]
```

Definition at line 902 of file [grcc.h](#).

3.70.4.2 clist

```
int MNodeClass::clist[GRCC_MAXNODES]
```

Definition at line 903 of file [grcc.h](#).

3.70.4.3 ndcl

```
int MNodeClass::ndcl[GRCC_MAXNODES]
```

Definition at line 904 of file [grcc.h](#).

3.70.4.4 flist

```
int MNodeClass::flist[GRCC_MAXNODES+1]
```

Definition at line 905 of file [grcc.h](#).

3.70.4.5 clord

```
int MNodeClass::clord[GRCC_MAXNODES]
```

Definition at line 906 of file [grcc.h](#).

3.70.4.6 cmindeg

```
int MNodeClass::cmindeg[GRCC_MAXNODES]
```

Definition at line 907 of file [grcc.h](#).

3.70.4.7 cmaxdeg

```
int MNodeClass::cmaxdeg[GRCC_MAXNODES]
```

Definition at line 908 of file [grcc.h](#).

3.70.4.8 nNodes

```
int MNodeClass::nNodes
```

Definition at line 909 of file [grcc.h](#).

3.70.4.9 nClasses

```
int MNodeClass::nClasses
```

Definition at line 910 of file [grcc.h](#).

3.70.4.10 maxdeg

```
int MNodeClass::maxdeg
```

Definition at line 911 of file [grcc.h](#).

3.70.4.11 flg0

```
int MNodeClass::flg0
```

Definition at line 913 of file [grcc.h](#).

3.70.4.12 flg1

```
int MNodeClass::flg1
```

Definition at line 914 of file [grcc.h](#).

3.70.4.13 flg2

```
int MNodeClass::flg2
```


Definition at line 915 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.71 Model Class Reference

Collaboration diagram for Model:

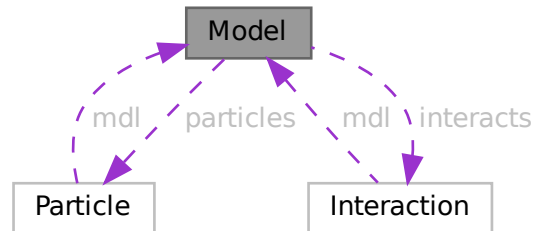

Public Member Functions

- [Model](#) ([MInput](#) *minp)
- void [prModel](#) (void)
- void [addParticle](#) ([PInput](#) *pinp)
- void [addParticleEnd](#) (void)
- void [addInteraction](#) ([IInput](#) *iinp)
- void [addInteractionEnd](#) (void)
- int [findParticleName](#) (const char *name)
- int [findParticleCode](#) (int pcd)
- int [findInteractionName](#) (const char *name)
- int [findInteractionCode](#) (int icd)
- char * [particleName](#) (int p)
- int [particleCode](#) (int p)
- int [normalParticle](#) (int pt)
- int [antiParticle](#) (int pt)
- int * [allParticles](#) (int *len)
- int [findMClass](#) (const int cpl, const int dgr)
- void [prParticleArray](#) (int n, int *a, const char *msg)

Static Public Member Functions

- static void [printMInput](#) ([MInput](#) *min)
- static void [printPInput](#) ([PInput](#) *pin)
- static void [printIInput](#) ([IInput](#) *iin)

Data Fields

- char * [name](#)
- char ** [cnlist](#)
- int [ncouple](#)
- int [nParticles](#)
- [Particle](#) ** [particles](#)
- int [pdef](#)
- int [nallPart](#)
- int [allPart](#) [GRCC_MAXMPARTICLES2]
- int [nintPart](#)
- int [intPart](#) [GRCC_MAXMPARTICLES2]
- int [nInteracts](#)
- [Interaction](#) ** [interacts](#)
- int [vdef](#)
- int [maxnlegs](#)
- int [maxcpl](#)
- int [maxloop](#)
- int * [cplgcp](#)
- int * [cplglg](#)
- int * [cplgnvl](#)
- int ** [cplgvl](#)
- int [ncplgcp](#)
- int [defpart](#)

3.71.1 Detailed Description

Definition at line [284](#) of file [grcc.h](#).

3.71.2 Constructor & Destructor Documentation

3.71.2.1 Model()

```
Model::Model (
    MInput * minp )
```

Definition at line [1978](#) of file [grcc.cc](#).

3.71.2.2 ~Model()

```
Model::~Model (
    void )
```

Definition at line [2039](#) of file [grcc.cc](#).

3.71.3 Member Function Documentation

3.71.3.1 prModel()

```
void Model::prModel (
    void )
```

Definition at line 2081 of file [grcc.cc](#).

3.71.3.2 addParticle()

```
void Model::addParticle (
    PInput * pinp )
```

Definition at line 2130 of file [grcc.cc](#).

3.71.3.3 addParticleEnd()

```
void Model::addParticleEnd (
    void )
```

Definition at line 2172 of file [grcc.cc](#).

3.71.3.4 addInteraction()

```
void Model::addInteraction (
    IInput * iinp )
```

Definition at line 2210 of file [grcc.cc](#).

3.71.3.5 addInteractionEnd()

```
void Model::addInteractionEnd (
    void )
```

Definition at line 2338 of file [grcc.cc](#).

3.71.3.6 findParticleName()

```
int Model::findParticleName (
    const char * name )
```

Definition at line 2408 of file [grcc.cc](#).

3.71.3.7 findParticleCode()

```
int Model::findParticleCode (
    int pcd )
```

Definition at line [2426](#) of file [grcc.cc](#).

3.71.3.8 findInteractionName()

```
int Model::findInteractionName (
    const char * name )
```

Definition at line [2545](#) of file [grcc.cc](#).

3.71.3.9 findInteractionCode()

```
int Model::findInteractionCode (
    int icd )
```

Definition at line [2558](#) of file [grcc.cc](#).

3.71.3.10 particleName()

```
char * Model::particleName (
    int p )
```

Definition at line [2441](#) of file [grcc.cc](#).

3.71.3.11 particleCode()

```
int Model::particleCode (
    int p )
```

Definition at line [2461](#) of file [grcc.cc](#).

3.71.3.12 normalParticle()

```
int Model::normalParticle (
    int pt )
```

Definition at line [2507](#) of file [grcc.cc](#).

3.71.3.13 antiParticle()

```
int Model::antiParticle (
    int pt )
```

Definition at line [2524](#) of file [grcc.cc](#).

3.71.3.14 allParticles()

```
int * Model::allParticles (
    int * len )
```

Definition at line 2538 of file [grcc.cc](#).

3.71.3.15 findMClass()

```
int Model::findMClass (
    const int cpl,
    const int dgr )
```

Definition at line 2494 of file [grcc.cc](#).

3.71.3.16 prParticleArray()

```
void Model::prParticleArray (
    int n,
    int * a,
    const char * msg )
```

Definition at line 2479 of file [grcc.cc](#).

3.71.3.17 printMInput()

```
void Model::printMInput (
    MInput * min ) [static]
```

Definition at line 2571 of file [grcc.cc](#).

3.71.3.18 printPInput()

```
void Model::printPInput (
    PInput * pin ) [static]
```

Definition at line 2591 of file [grcc.cc](#).

3.71.3.19 printIInput()

```
void Model::printIInput (
    IInput * iin ) [static]
```

Definition at line 2599 of file [grcc.cc](#).

3.71.4 Field Documentation

3.71.4.1 name

```
char* Model::name
```

Definition at line 286 of file [grcc.h](#).

3.71.4.2 cnlist

```
char** Model::cnlist
```

Definition at line 287 of file [grcc.h](#).

3.71.4.3 ncouple

```
int Model::ncouple
```

Definition at line 288 of file [grcc.h](#).

3.71.4.4 nParticles

```
int Model::nParticles
```

Definition at line 290 of file [grcc.h](#).

3.71.4.5 particles

```
Particle** Model::particles
```

Definition at line 291 of file [grcc.h](#).

3.71.4.6 pdef

```
int Model::pdef
```

Definition at line 292 of file [grcc.h](#).

3.71.4.7 nallPart

```
int Model::nallPart
```

Definition at line 295 of file [grcc.h](#).

3.71.4.8 allPart

```
int Model::allPart[GRCC_MAXMPARTICLES2]
```

Definition at line 296 of file [grcc.h](#).

3.71.4.9 nintPart

```
int Model::nintPart
```

Definition at line 299 of file [grcc.h](#).

3.71.4.10 intPart

```
int Model::intPart[GRCC_MAXMPARTICLES2]
```

Definition at line 300 of file [grcc.h](#).

3.71.4.11 nInteracts

```
int Model::nInteracts
```

Definition at line 302 of file [grcc.h](#).

3.71.4.12 interacts

```
Interaction** Model::interacts
```

Definition at line 303 of file [grcc.h](#).

3.71.4.13 vdef

```
int Model::vdef
```

Definition at line 304 of file [grcc.h](#).

3.71.4.14 maxnlegs

```
int Model::maxnlegs
```

Definition at line 306 of file [grcc.h](#).

3.71.4.15 maxcpl

```
int Model::maxcpl
```

Definition at line 307 of file [grcc.h](#).

3.71.4.16 maxloop

```
int Model::maxloop
```

Definition at line 308 of file [grcc.h](#).

3.71.4.17 cplgcp

```
int* Model::cplgcp
```

Definition at line 311 of file [grcc.h](#).

3.71.4.18 cplglg

```
int* Model::cplglg
```

Definition at line 312 of file [grcc.h](#).

3.71.4.19 cplgnvl

```
int* Model::cplgnvl
```

Definition at line 313 of file [grcc.h](#).

3.71.4.20 cplgvl

```
int** Model::cplgvl
```

Definition at line 314 of file [grcc.h](#).

3.71.4.21 ncplgcp

```
int Model::ncplgcp
```

Definition at line 315 of file [grcc.h](#).

3.71.4.22 defpart

```
int Model::defpart
```


Definition at line 317 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.72 MoDeL Struct Reference

Collaboration diagram for MoDeL:

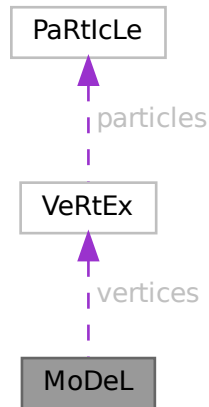

Data Fields

- VERTEX ** vertices
- WORD * couplings
- UBYTE * name
- void * grccmodel
- WORD legcouple [MAXLEGS+2]
- WORD nparticles
- WORD nvertices
- WORD invertices
- WORD sizevertices
- WORD sizecouplings
- WORD ncouplings
- WORD error
- WORD dummy

3.72.1 Detailed Description

Definition at line 637 of file [structs.h](#).

3.72.2 Field Documentation

3.72.2.1 vertices

VERTEX** MoDeL::vertices

Definition at line 638 of file [structs.h](#).

3.72.2.2 couplings

WORD* MoDeL::couplings

Definition at line 639 of file [structs.h](#).

3.72.2.3 name

UBYTE* MoDeL::name

Definition at line 640 of file [structs.h](#).

3.72.2.4 grccmodel

void* MoDeL::grccmodel

Definition at line 641 of file [structs.h](#).

3.72.2.5 legcouple

WORD MoDeL::legcouple[MAXLEGS+2]

Definition at line 642 of file [structs.h](#).

3.72.2.6 nparticles

WORD MoDeL::nparticles

Definition at line 643 of file [structs.h](#).

3.72.2.7 nvertices

WORD MoDeL::nvertices

Definition at line 644 of file [structs.h](#).

3.72.2.8 invertices

WORD MoDeL::invertices

Definition at line 645 of file [structs.h](#).

3.72.2.9 sizevertices

WORD MoDeL::sizevertices

Definition at line 646 of file [structs.h](#).

3.72.2.10 sizecouplings

WORD MoDeL::sizecouplings

Definition at line 647 of file [structs.h](#).

3.72.2.11 ncouplings

WORD MoDeL::ncouplings

Definition at line 648 of file [structs.h](#).

3.72.2.12 error

WORD MoDeL::error

Definition at line 649 of file [structs.h](#).

3.72.2.13 dummy

WORD MoDeL::dummy

Definition at line 650 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.73 MODNUM Struct Reference

Data Fields

- UWORD * [a](#)
- UWORD * [m](#)
- WORD [na](#)
- WORD [nm](#)

3.73.1 Detailed Description

Definition at line 1268 of file [structs.h](#).

3.73.2 Field Documentation

3.73.2.1 a

UWORD* MODNUM::a

Definition at line 1269 of file [structs.h](#).

3.73.2.2 m

UWORD* MODNUM: :m

Definition at line 1270 of file [structs.h](#).

3.73.2.3 na

WORD MODNUM: :na

Definition at line 1271 of file [structs.h](#).

3.73.2.4 nm

WORD MODNUM: :nm

Definition at line 1272 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.74 MoDoPtDoLIaRS Struct Reference

Data Fields

- WORD [number](#)
- WORD [type](#)

3.74.1 Detailed Description

Definition at line 562 of file [structs.h](#).

3.74.2 Field Documentation

3.74.2.1 number

WORD MoDoPtDoLIaRS: :number

Definition at line 566 of file [structs.h](#).

3.74.2.2 type

```
WORD MoDoPtDoLlArS::type
```

Definition at line 567 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.75 monomial_larger Class Reference

Public Member Functions

- bool [operator\(\)](#) (const WORD *a, const WORD *b)

3.75.1 Detailed Description

Definition at line 177 of file [poly.h](#).

3.75.2 Constructor & Destructor Documentation

3.75.2.1 monomial_larger()

```
monomial_larger::monomial_larger ( ) [inline]
```

Definition at line 182 of file [poly.h](#).

3.75.3 Member Function Documentation

3.75.3.1 operator()

```
bool monomial_larger::operator() (
    const WORD * a,
    const WORD * b ) [inline]
```

Definition at line 188 of file [poly.h](#).

The documentation for this class was generated from the following file:

- [poly.h](#)

3.76 MORbits Class Reference

Public Member Functions

- void [print](#) (void)
- void [initPerm](#) (int nnodes)
- void [fromPerm](#) (int *perm)
- void [toOrbits](#) (void)

Data Fields

- int [nOrbits](#)
- int [nNodes](#)
- int [nd2or](#) [GRCC_MAXNODES]
- int [or2nd](#) [GRCC_MAXNODES]
- int [flist](#) [GRCC_MAXNODES+1]

3.76.1 Detailed Description

Definition at line [1067](#) of file [grcc.h](#).

3.76.2 Constructor & Destructor Documentation

3.76.2.1 MORbits()

```
MORbits::MORbits (  
    void )
```

Definition at line [5354](#) of file [grcc.cc](#).

3.76.2.2 ~MORbits()

```
MORbits::~~MORbits (  
    void )
```

Definition at line [5361](#) of file [grcc.cc](#).

3.76.3 Member Function Documentation

3.76.3.1 print()

```
void MORbits::print (  
    void )
```

Definition at line [5366](#) of file [grcc.cc](#).

3.76.3.2 initPerm()

```
void MOrbits::initPerm (
    int nnodes )
```

Definition at line [5379](#) of file [grcc.cc](#).

3.76.3.3 fromPerm()

```
void MOrbits::fromPerm (
    int * perm )
```

Definition at line [5390](#) of file [grcc.cc](#).

3.76.3.4 toOrbits()

```
void MOrbits::toOrbits (
    void )
```

Definition at line [5429](#) of file [grcc.cc](#).

3.76.4 Field Documentation

3.76.4.1 nOrbits

```
int MOrbits::nOrbits
```

Definition at line [1079](#) of file [grcc.h](#).

3.76.4.2 nNodes

```
int MOrbits::nNodes
```

Definition at line [1080](#) of file [grcc.h](#).

3.76.4.3 nd2or

```
int MOrbits::nd2or[GRCC_MAXNODES]
```

Definition at line [1081](#) of file [grcc.h](#).

3.76.4.4 or2nd

```
int MOrbits::or2nd[GRCC_MAXNODES]
```

Definition at line [1082](#) of file [grcc.h](#).

3.76.4.5 flist

```
int MORbits::flist[GRCC_MAXNODES+1]
```

Definition at line 1083 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.77 flint::mpoly Class Reference

Public Member Functions

- [mpoly](#) (fmpz_mpoly_ctx_struct *ctx_in)
- void [print](#) (const string &text)

Data Fields

- fmpz_mpoly_t [d](#)

3.77.1 Detailed Description

Definition at line 102 of file [flintinterface.h](#).

3.77.2 Constructor & Destructor Documentation

3.77.2.1 mpoly()

```
flint::mpoly::mpoly (
    fmpz_mpoly_ctx_struct * ctx_in ) [inline], [explicit]
```

Definition at line 107 of file [flintinterface.h](#).

3.77.2.2 ~mpoly()

```
flint::mpoly::~mpoly ( ) [inline]
```

Definition at line 108 of file [flintinterface.h](#).

3.77.3 Member Function Documentation

3.77.3.1 print()

```
void flint::mpoly::print (
    const string & text ) [inline]
```

Definition at line 109 of file [flintinterface.h](#).

3.77.4 Field Documentation

3.77.4.1 d

```
fmprz_mpoly_t flint::mpoly::d
```

Definition at line 106 of file [flintinterface.h](#).

The documentation for this class was generated from the following file:

- [flintinterface.h](#)

3.78 flint::mpoly_ctx Class Reference

Public Member Functions

- [mpoly_ctx](#) (int64_t nvars)

Data Fields

- [fmprz_mpoly_ctx_t](#) [d](#)

3.78.1 Detailed Description

Definition at line 125 of file [flintinterface.h](#).

3.78.2 Constructor & Destructor Documentation

3.78.2.1 mpoly_ctx()

```
flint::mpoly_ctx::mpoly_ctx (
    int64_t nvars ) [inline], [explicit]
```

Definition at line 128 of file [flintinterface.h](#).

3.78.2.2 ~mpoly_ctx()

```
flint::mpoly_ctx::~~mpoly_ctx ( ) [inline]
```

Definition at line 129 of file [flintinterface.h](#).

3.78.3 Field Documentation

3.78.3.1 d

```
fmpz_mpoly_ctx_t flint::mpoly_ctx::d
```

Definition at line 127 of file [flintinterface.h](#).

The documentation for this class was generated from the following file:

- [flintinterface.h](#)

3.79 flint::mpoly_factor Class Reference

Public Member Functions

- [mpoly_factor](#) (fmpz_mpoly_ctx_struct *ctx_in)

Data Fields

- fmpz_mpoly_factor_t [d](#)

3.79.1 Detailed Description

Definition at line 115 of file [flintinterface.h](#).

3.79.2 Constructor & Destructor Documentation

3.79.2.1 mpoly_factor()

```
flint::mpoly_factor::mpoly_factor (
    fmpz_mpoly_ctx_struct * ctx_in ) [inline], [explicit]
```

Definition at line 120 of file [flintinterface.h](#).

3.79.2.2 ~mpoly_factor()

```
flint::mpoly_factor::~~mpoly_factor ( ) [inline]
```

Definition at line 123 of file [flintinterface.h](#).

3.79.3 Field Documentation

3.79.3.1 d

```
mpz_poly_factor_t flint::mpoly_factor::d
```

Definition at line 119 of file [flintinterface.h](#).


The documentation for this class was generated from the following file:

- [flintinterface.h](#)

3.80 N_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for N_const:

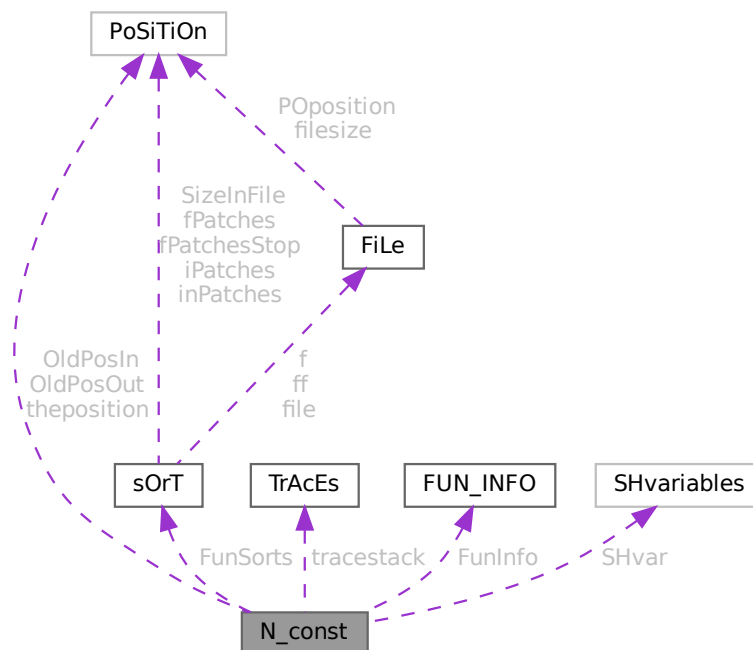

Data Fields

- [POSITION](#) OldPosIn
- [POSITION](#) OldPosOut
- [POSITION](#) theposition
- [WORD](#) * [EndNest](#)
- [WORD](#) * [Frozen](#)
- [WORD](#) * [FullProto](#)
- [WORD](#) * [cTerm](#)
- [int](#) * [RepPoint](#)
- [WORD](#) * [WildValue](#)
- [WORD](#) * [WildStop](#)
- [WORD](#) * [argaddress](#)
- [WORD](#) * [RepFunList](#)
- [WORD](#) * [patstop](#)
- [WORD](#) * [terstop](#)
- [WORD](#) * [terstart](#)
- [WORD](#) * [terfirstcomm](#)
- [WORD](#) * [DumFound](#)
- [WORD](#) ** [DumPlace](#)
- [WORD](#) ** [DumFunPlace](#)
- [WORD](#) * [UsedSymbol](#)
- [WORD](#) * [UsedVector](#)
- [WORD](#) * [UsedIndex](#)
- [WORD](#) * [UsedFunction](#)
- [WORD](#) * [MaskPointer](#)
- [WORD](#) * [ForFindOnly](#)
- [WORD](#) * [findTerm](#)
- [WORD](#) * [findPattern](#)
- [WORD](#) * [dummyrenumlist](#)
- [int](#) * [funargs](#)
- [WORD](#) ** [funlocs](#)
- [int](#) * [funinds](#)
- [UWORD](#) * [NoScrat2](#)
- [WORD](#) * [ReplaceScrat](#)
- [TRACES](#) * [tracestack](#)
- [WORD](#) * [selecttermundo](#)
- [WORD](#) * [patternbuffer](#)
- [WORD](#) * [termbuffer](#)
- [WORD](#) ** [PoinScratch](#)
- [WORD](#) ** [FunScratch](#)
- [WORD](#) * [RenumScratch](#)
- [FUN_INFO](#) * [FunInfo](#)
- [WORD](#) ** [SplitScratch](#)
- [WORD](#) ** [SplitScratch1](#)
- [SORTING](#) ** [FunSorts](#)
- [UWORD](#) * [SoScratC](#)
- [WORD](#) * [listinprint](#)
- [WORD](#) * [currentTerm](#)
- [WORD](#) ** [arglist](#)
- [int](#) * [tlistbuf](#)
- [WORD](#) * [compressSpace](#)
- [UWORD](#) * [SHcombi](#)
- [WORD](#) * [poly_vars](#)
- [UWORD](#) * [cmod](#)

- SHvariables SHvar
- LONG deferskipped
- LONG InScratch
- LONG SplitScratchSize
- LONG InScratch1
- LONG SplitScratchSize1
- LONG ninterms
- LONG SHcombisize
- int NumTotWildArgs
- int UseFindOnly
- int UsedOtherFind
- int ErrorInDollar
- int numfargs
- int numflocs
- int nargs
- int tohunt
- int numoffuns
- int funisize
- int RSize
- int numtracesctack
- int intracestack
- int numfuninfo
- int NumFunSorts
- int MaxFunSorts
- int arglistsize
- int tlistsize
- int filenum
- int compressSize
- int polysortflag
- int nogroundlevel
- int subsubveto
- WORD MaxRenumScratch
- WORD oldtype
- WORD oldvalue
- WORD NumWild
- WORD RepFunNum
- WORD DisOrderFlag
- WORD WildDirt
- WORD NumFound
- WORD WildReserve
- WORD TeInFun
- WORD TeSuOut
- WORD WildArgs
- WORD WildEat
- WORD PolyNormFlag
- WORD PolyFunTodo
- WORD sizeselecttermundo
- WORD patternbuffersize
- WORD numlistingprint
- WORD ncmmod
- WORD ExpectedSign
- WORD SignCheck
- WORD IndDum
- WORD poly_num_vars
- WORD idfunctionflag
- WORD poly_vars_type
- WORD tryterm

3.80.1 Detailed Description

The `N_const` struct is part of the global data and resides either in the ALLGLOBALS struct A, or the ALLPRIVATES struct B (TFORM) under the name N We see it used with the macro AN as in AN.RepFunNum It has variables that are private to each thread and are used as temporary storage during the expansion of the terms tree.

Definition at line 2169 of file [structs.h](#).

3.80.2 Field Documentation

3.80.2.1 OldPosIn

```
POSITION N_const::OldPosIn
```

Definition at line 2170 of file [structs.h](#).

3.80.2.2 OldPosOut

```
POSITION N_const::OldPosOut
```

Definition at line 2171 of file [structs.h](#).

3.80.2.3 theposition

```
POSITION N_const::theposition
```

Definition at line 2172 of file [structs.h](#).

3.80.2.4 EndNest

```
WORD* N_const::EndNest
```

Definition at line 2173 of file [structs.h](#).

3.80.2.5 Frozen

```
WORD* N_const::Frozen
```

Definition at line 2174 of file [structs.h](#).

3.80.2.6 FullProto

```
WORD* N_const::FullProto
```

Definition at line 2175 of file [structs.h](#).

3.80.2.7 cTerm

WORD* N_const::cTerm

Definition at line 2176 of file [structs.h](#).

3.80.2.8 RepPoint

int* N_const::RepPoint

Definition at line 2177 of file [structs.h](#).

3.80.2.9 WildValue

WORD* N_const::WildValue

Definition at line 2178 of file [structs.h](#).

3.80.2.10 WildStop

WORD* N_const::WildStop

Definition at line 2179 of file [structs.h](#).

3.80.2.11 argaddress

WORD* N_const::argaddress

Definition at line 2180 of file [structs.h](#).

3.80.2.12 RepFunList

WORD* N_const::RepFunList

Definition at line 2181 of file [structs.h](#).

3.80.2.13 patstop

WORD* N_const::patstop

Definition at line 2182 of file [structs.h](#).

3.80.2.14 terstop

WORD* N_const::terstop

Definition at line 2183 of file [structs.h](#).

3.80.2.15 **terstart**

`WORD* N_const::terstart`

Definition at line [2184](#) of file [structs.h](#).

3.80.2.16 **terfirstcomm**

`WORD* N_const::terfirstcomm`

Definition at line [2185](#) of file [structs.h](#).

3.80.2.17 **DumFound**

`WORD* N_const::DumFound`

Definition at line [2186](#) of file [structs.h](#).

3.80.2.18 **DumPlace**

`WORD** N_const::DumPlace`

Definition at line [2187](#) of file [structs.h](#).

3.80.2.19 **DumFunPlace**

`WORD** N_const::DumFunPlace`

Definition at line [2188](#) of file [structs.h](#).

3.80.2.20 **UsedSymbol**

`WORD* N_const::UsedSymbol`

Definition at line [2189](#) of file [structs.h](#).

3.80.2.21 **UsedVector**

`WORD* N_const::UsedVector`

Definition at line [2190](#) of file [structs.h](#).

3.80.2.22 **UsedIndex**

`WORD* N_const::UsedIndex`

Definition at line [2191](#) of file [structs.h](#).

3.80.2.23 UsedFunction

WORD* N_const::UsedFunction

Definition at line 2192 of file [structs.h](#).

3.80.2.24 MaskPointer

WORD* N_const::MaskPointer

Definition at line 2193 of file [structs.h](#).

3.80.2.25 ForFindOnly

WORD* N_const::ForFindOnly

Definition at line 2194 of file [structs.h](#).

3.80.2.26 findTerm

WORD* N_const::findTerm

Definition at line 2195 of file [structs.h](#).

3.80.2.27 findPattern

WORD* N_const::findPattern

Definition at line 2196 of file [structs.h](#).

3.80.2.28 dummyrenumlist

WORD* N_const::dummyrenumlist

Definition at line 2201 of file [structs.h](#).

3.80.2.29 funargs

int* N_const::funargs

Definition at line 2202 of file [structs.h](#).

3.80.2.30 funlocs

WORD** N_const::funlocs

Definition at line 2203 of file [structs.h](#).

3.80.2.31 funinds

```
int* N_const::funinds
```

Definition at line 2204 of file [structs.h](#).

3.80.2.32 NoScrat2

```
UWORD* N_const::NoScrat2
```

Definition at line 2205 of file [structs.h](#).

3.80.2.33 ReplaceScrat

```
WORD* N_const::ReplaceScrat
```

Definition at line 2206 of file [structs.h](#).

3.80.2.34 tracestack

```
TRACES* N_const::tracestack
```

Definition at line 2207 of file [structs.h](#).

3.80.2.35 selecttermundo

```
WORD* N_const::selecttermundo
```

Definition at line 2208 of file [structs.h](#).

3.80.2.36 patternbuffer

```
WORD* N_const::patternbuffer
```

Definition at line 2209 of file [structs.h](#).

3.80.2.37 termbuffer

```
WORD* N_const::termbuffer
```

Definition at line 2210 of file [structs.h](#).

3.80.2.38 PoinScratch

```
WORD** N_const::PoinScratch
```

Definition at line 2211 of file [structs.h](#).

3.80.2.39 FunScratch

WORD** N_const::FunScratch

Definition at line 2212 of file [structs.h](#).

3.80.2.40 RenumScratch

WORD* N_const::RenumScratch

Definition at line 2213 of file [structs.h](#).

3.80.2.41 FunInfo

[FUN_INFO](#)* N_const::FunInfo

Definition at line 2214 of file [structs.h](#).

3.80.2.42 SplitScratch

WORD** N_const::SplitScratch

Definition at line 2215 of file [structs.h](#).

3.80.2.43 SplitScratch1

WORD** N_const::SplitScratch1

Definition at line 2216 of file [structs.h](#).

3.80.2.44 FunSorts

[SORTING](#)** N_const::FunSorts

Definition at line 2217 of file [structs.h](#).

3.80.2.45 SoScratC

UWORD* N_const::SoScratC

Definition at line 2218 of file [structs.h](#).

3.80.2.46 listinprint

WORD* N_const::listinprint

Definition at line 2219 of file [structs.h](#).

3.80.2.47 currentTerm

WORD* N_const::currentTerm

Definition at line 2220 of file [structs.h](#).

3.80.2.48 arglist

WORD** N_const::arglist

Definition at line 2221 of file [structs.h](#).

3.80.2.49 tlistbuf

int* N_const::tlistbuf

Definition at line 2222 of file [structs.h](#).

3.80.2.50 compressSpace

WORD* N_const::compressSpace

Definition at line 2226 of file [structs.h](#).

3.80.2.51 SHcombi

UWORD* N_const::SHcombi

Definition at line 2231 of file [structs.h](#).

3.80.2.52 poly_vars

WORD* N_const::poly_vars

Definition at line 2232 of file [structs.h](#).

3.80.2.53 cmod

UWORD* N_const::cmod

Definition at line 2233 of file [structs.h](#).

3.80.2.54 SHvar

[SHvariables](#) N_const::SHvar

Definition at line 2234 of file [structs.h](#).

3.80.2.55 deferskipped

LONG N_const::deferskipped

Definition at line 2235 of file [structs.h](#).

3.80.2.56 InScratch

LONG N_const::InScratch

Definition at line 2236 of file [structs.h](#).

3.80.2.57 SplitScratchSize

LONG N_const::SplitScratchSize

Definition at line 2237 of file [structs.h](#).

3.80.2.58 InScratch1

LONG N_const::InScratch1

Definition at line 2238 of file [structs.h](#).

3.80.2.59 SplitScratchSize1

LONG N_const::SplitScratchSize1

Definition at line 2239 of file [structs.h](#).

3.80.2.60 ninterms

LONG N_const::ninterms

Definition at line 2240 of file [structs.h](#).

3.80.2.61 SHcombisize

LONG N_const::SHcombisize

Definition at line 2249 of file [structs.h](#).

3.80.2.62 NumTotWildArgs

int N_const::NumTotWildArgs

Definition at line 2250 of file [structs.h](#).

3.80.2.63 UseFindOnly

```
int N_const::UseFindOnly
```

Definition at line [2251](#) of file [structs.h](#).

3.80.2.64 UsedOtherFind

```
int N_const::UsedOtherFind
```

Definition at line [2252](#) of file [structs.h](#).

3.80.2.65 ErrorInDollar

```
int N_const::ErrorInDollar
```

Definition at line [2253](#) of file [structs.h](#).

3.80.2.66 numfargs

```
int N_const::numfargs
```

Definition at line [2254](#) of file [structs.h](#).

3.80.2.67 numflocs

```
int N_const::numflocs
```

Definition at line [2255](#) of file [structs.h](#).

3.80.2.68 nargs

```
int N_const::nargs
```

Definition at line [2256](#) of file [structs.h](#).

3.80.2.69 tohunt

```
int N_const::tohunt
```

Definition at line [2257](#) of file [structs.h](#).

3.80.2.70 numoffuns

```
int N_const::numoffuns
```

Definition at line [2258](#) of file [structs.h](#).

3.80.2.71 funisize

```
int N_const::funisize
```

Definition at line [2259](#) of file [structs.h](#).

3.80.2.72 RSize

```
int N_const::RSize
```

Definition at line [2260](#) of file [structs.h](#).

3.80.2.73 numtracesctack

```
int N_const::numtracesctack
```

Definition at line [2261](#) of file [structs.h](#).

3.80.2.74 intracestack

```
int N_const::intracestack
```

Definition at line [2262](#) of file [structs.h](#).

3.80.2.75 numfuninfo

```
int N_const::numfuninfo
```

Definition at line [2263](#) of file [structs.h](#).

3.80.2.76 NumFunSorts

```
int N_const::NumFunSorts
```

Definition at line [2264](#) of file [structs.h](#).

3.80.2.77 MaxFunSorts

```
int N_const::MaxFunSorts
```

Definition at line [2265](#) of file [structs.h](#).

3.80.2.78 arglistsize

```
int N_const::arglistsize
```

Definition at line [2266](#) of file [structs.h](#).

3.80.2.79 tlistsize

```
int N_const::tlistsize
```

Definition at line 2267 of file [structs.h](#).

3.80.2.80 filenum

```
int N_const::filenum
```

Definition at line 2268 of file [structs.h](#).

3.80.2.81 compressSize

```
int N_const::compressSize
```

Definition at line 2269 of file [structs.h](#).

3.80.2.82 polysortflag

```
int N_const::polysortflag
```

Definition at line 2270 of file [structs.h](#).

3.80.2.83 nogroundlevel

```
int N_const::nogroundlevel
```

Definition at line 2271 of file [structs.h](#).

3.80.2.84 subsubveto

```
int N_const::subsubveto
```

Definition at line 2272 of file [structs.h](#).

3.80.2.85 MaxRenumScratch

```
WORD N_const::MaxRenumScratch
```

Definition at line 2273 of file [structs.h](#).

3.80.2.86 oldtype

```
WORD N_const::oldtype
```

Definition at line 2274 of file [structs.h](#).

3.80.2.87 oldvalue

WORD N_const::oldvalue

Definition at line [2275](#) of file [structs.h](#).

3.80.2.88 NumWild

WORD N_const::NumWild

Definition at line [2276](#) of file [structs.h](#).

3.80.2.89 RepFunNum

WORD N_const::RepFunNum

Definition at line [2277](#) of file [structs.h](#).

3.80.2.90 DisOrderFlag

WORD N_const::DisOrderFlag

Definition at line [2278](#) of file [structs.h](#).

3.80.2.91 WildDirt

WORD N_const::WildDirt

Definition at line [2279](#) of file [structs.h](#).

3.80.2.92 NumFound

WORD N_const::NumFound

Definition at line [2280](#) of file [structs.h](#).

3.80.2.93 WildReserve

WORD N_const::WildReserve

Definition at line [2281](#) of file [structs.h](#).

3.80.2.94 TeInFun

WORD N_const::TeInFun

Definition at line [2282](#) of file [structs.h](#).

3.80.2.95 TeSuOut

WORD N_const::TeSuOut

Definition at line 2283 of file [structs.h](#).

3.80.2.96 WildArgs

WORD N_const::WildArgs

Definition at line 2284 of file [structs.h](#).

3.80.2.97 WildEat

WORD N_const::WildEat

Definition at line 2285 of file [structs.h](#).

3.80.2.98 PolyNormFlag

WORD N_const::PolyNormFlag

Definition at line 2286 of file [structs.h](#).

3.80.2.99 PolyFunTodo

WORD N_const::PolyFunTodo

Definition at line 2287 of file [structs.h](#).

3.80.2.100 sizeselecttermundo

WORD N_const::sizeselecttermundo

Definition at line 2288 of file [structs.h](#).

3.80.2.101 patternbufferize

WORD N_const::patternbufferize

Definition at line 2289 of file [structs.h](#).

3.80.2.102 numlistinprint

WORD N_const::numlistinprint

Definition at line 2290 of file [structs.h](#).

3.80.2.103 ncmmod

WORD N_const::ncmmod

Definition at line 2291 of file [structs.h](#).

3.80.2.104 ExpectedSign

WORD N_const::ExpectedSign

Definition at line 2292 of file [structs.h](#).

3.80.2.105 SignCheck

WORD N_const::SignCheck

Used in pattern matching of antisymmetric functions

Definition at line 2293 of file [structs.h](#).

3.80.2.106 IndDum

WORD N_const::IndDum

Used in pattern matching of antisymmetric functions

Definition at line 2294 of file [structs.h](#).

3.80.2.107 poly_num_vars

WORD N_const::poly_num_vars

Definition at line 2295 of file [structs.h](#).

3.80.2.108 idfunctionflag

WORD N_const::idfunctionflag

Definition at line 2296 of file [structs.h](#).

3.80.2.109 poly_vars_type

WORD N_const::poly_vars_type

Definition at line 2297 of file [structs.h](#).

3.80.2.110 tryterm

WORD N_const::tryterm

Definition at line 2298 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.81 nameblock Struct Reference

Data Fields

- MLONG [previousblock](#)
- MLONG [position](#)
- char [names](#) [NAMETABLESIZE]

3.81.1 Detailed Description

Definition at line 117 of file [minos.h](#).

3.81.2 Field Documentation

3.81.2.1 previousblock

MLONG nameblock::previousblock

Definition at line 118 of file [minos.h](#).

3.81.2.2 position

MLONG nameblock::position

Definition at line 119 of file [minos.h](#).

3.81.2.3 names

char nameblock::names [NAMETABLESIZE]

Definition at line 120 of file [minos.h](#).

The documentation for this struct was generated from the following file:

- [minos.h](#)

3.82 NaMeNode Struct Reference

```
#include <structs.h>
```

Data Fields

- LONG [name](#)
- WORD [parent](#)
- WORD [left](#)
- WORD [right](#)
- WORD [balance](#)
- WORD [type](#)
- WORD [number](#)

3.82.1 Detailed Description

The names of variables are kept in an array. Elements of type [NAMENODE](#) define a tree (that is kept balanced) that make it easy and fast to look for variables. See also [NAMETREE](#).

Definition at line [243](#) of file [structs.h](#).

3.82.2 Field Documentation

3.82.2.1 name

LONG [NaMeNode::name](#)

Offset into [NAMETREE::namebuffer](#).

Definition at line [244](#) of file [structs.h](#).

3.82.2.2 parent

WORD [NaMeNode::parent](#)

== -1 if no parent.

Definition at line [245](#) of file [structs.h](#).

3.82.2.3 left

WORD [NaMeNode::left](#)

== -1 if no child.

Definition at line [246](#) of file [structs.h](#).

3.82.2.4 right

WORD NaMeNode::right

== -1 if no child.

Definition at line 247 of file [structs.h](#).

3.82.2.5 balance

WORD NaMeNode::balance

Used for the balancing of the tree.

Definition at line 248 of file [structs.h](#).

3.82.2.6 type

WORD NaMeNode::type

Type associated with the name. See [compiler types](#).

Definition at line 249 of file [structs.h](#).

3.82.2.7 number

WORD NaMeNode::number

Number of variable in [LIST](#)'s like for example [C_const::SymbolList](#).


Definition at line 250 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.83 NaMeSpAcE Struct Reference

Collaboration diagram for NaMeSpAcE:

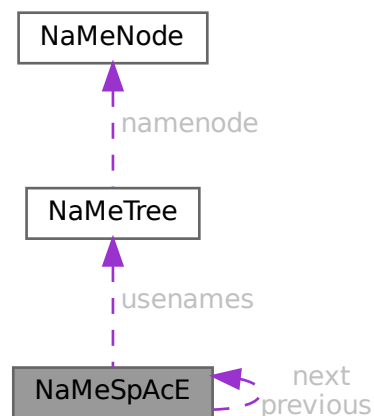

Data Fields

- struct [NaMeSpAcE](#) * [previous](#)
- struct [NaMeSpAcE](#) * [next](#)
- [NAMETREE](#) * [usernames](#)
- [UBYTE](#) * [name](#)

3.83.1 Detailed Description

Definition at line [658](#) of file [structs.h](#).

3.83.2 Field Documentation

3.83.2.1 [previous](#)

```
struct NaMeSpAcE* NaMeSpAcE::previous
```

Definition at line [659](#) of file [structs.h](#).

3.83.2.2 [next](#)

```
struct NaMeSpAcE* NaMeSpAcE::next
```

Definition at line [660](#) of file [structs.h](#).

3.83.2.3 [usernames](#)

```
NAMETREE* NaMeSpAcE::usernames
```

Definition at line [661](#) of file [structs.h](#).

3.83.2.4 [name](#)

```
UBYTE* NaMeSpAcE::name
```

Definition at line [662](#) of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.84 NaMeTree Struct Reference

```
#include <structs.h>
```

Collaboration diagram for NaMeTree:



Data Fields

- [NAMENODE](#) * [namenode](#)
- UBYTE * [namebuffer](#)
- LONG [nodesize](#)
- LONG [nodefill](#)
- LONG [namesize](#)
- LONG [namefill](#)
- LONG [oldnamefill](#)
- LONG [oldnodefill](#)
- LONG [globalnamefill](#)
- LONG [globalnodefill](#)
- LONG [clearnamefill](#)
- LONG [clearnodefill](#)
- WORD [headnode](#)

3.84.1 Detailed Description

A struct of type [NAMETREE](#) controls a complete (balanced) tree of names for the compiler. The compiler maintains several of such trees and the system has been set up in such a way that one could define more of them if we ever want to work with local name spaces.

Definition at line 260 of file [structs.h](#).

3.84.2 Field Documentation

3.84.2.1 namenode

[NAMENODE](#)* [NaMeTree::namenode](#)

[D] Vector of [NAMENODE](#)'s. Number of elements is [nodesize](#). =0 if no memory has been allocated.

Definition at line 261 of file [structs.h](#).

3.84.2.2 namebuffer

```
UBYTE* NaMeTree::namebuffer
```

[D] Buffer that holds all the name strings referred to by the NAMENODE's. Allocation size is [namesize](#). =0 if no memory has been allocated.

Definition at line [263](#) of file [structs.h](#).

3.84.2.3 nodesize

```
LONG NaMeTree::nodesize
```

Maximum number of elements in [namenode](#).

Definition at line [266](#) of file [structs.h](#).

3.84.2.4 nodefill

```
LONG NaMeTree::nodefill
```

Number of currently used nodes in [namenode](#).

Definition at line [267](#) of file [structs.h](#).

3.84.2.5 namesize

```
LONG NaMeTree::namesize
```

Allocation size of [namebuffer](#) in bytes.

Definition at line [268](#) of file [structs.h](#).

3.84.2.6 namefill

```
LONG NaMeTree::namefill
```

Number of bytes occupied.

Definition at line [269](#) of file [structs.h](#).

3.84.2.7 oldnamefill

```
LONG NaMeTree::oldnamefill
```

UNUSED

Definition at line [270](#) of file [structs.h](#).

3.84.2.8 oldnodefill

```
LONG NaMeTree::oldnodefill
```

UNUSED

Definition at line 271 of file [structs.h](#).

3.84.2.9 globalnamefill

```
LONG NaMeTree::globalnamefill
```

Set by .global statement to the value of [namefill](#). When a .store command is processed, this value will be used to reset namefill.

Definition at line 272 of file [structs.h](#).

3.84.2.10 globalnodefill

```
LONG NaMeTree::globalnodefill
```

Same usage as [globalnamefill](#), but for nodefill.

Definition at line 274 of file [structs.h](#).

3.84.2.11 clearnamefill

```
LONG NaMeTree::clearnamefill
```

Marks the reset point used by the .clear statement.

Definition at line 275 of file [structs.h](#).

3.84.2.12 clearnodefill

```
LONG NaMeTree::clearnodefill
```

Marks the reset point used by the .clear statement.

Definition at line 276 of file [structs.h](#).

3.84.2.13 headnode

```
WORD NaMeTree::headnode
```

Offset in [namenode](#) of head node. ==-1 if tree is empty.

Definition at line 277 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.85 NCand Class Reference

Public Member Functions

- [NCand](#) (const NCandSt sta, const int dega, const int nilst, int *ilst)
- void [prNCand](#) (const char *msg)

Data Fields

- int [deg](#)
- NCandSt [st](#)
- int [nilist](#)
- int [ilst](#) [GRCC_MAXMINTERACT]

3.85.1 Detailed Description

Definition at line [1106](#) of file [grcc.h](#).

3.85.2 Constructor & Destructor Documentation

3.85.2.1 NCand()

```
NCand::NCand (
    const NCandSt sta,
    const int dega,
    const int nilst,
    int * ilst )
```

Definition at line [8145](#) of file [grcc.cc](#).

3.85.2.2 ~NCand()

```
NCand::~NCand (
    void )
```

Definition at line [8172](#) of file [grcc.cc](#).

3.85.3 Member Function Documentation

3.85.3.1 prNCand()

```
void NCand::prNCand (
    const char * msg )
```

Definition at line [8177](#) of file [grcc.cc](#).

3.85.4 Field Documentation

3.85.4.1 deg

```
int NCand::deg
```

Definition at line 1110 of file [grcc.h](#).

3.85.4.2 st

```
NCandSt NCand::st
```

Definition at line 1111 of file [grcc.h](#).

3.85.4.3 nilist

```
int NCand::nilist
```

Definition at line 1112 of file [grcc.h](#).

3.85.4.4 ilist

```
int NCand::ilist[GRCC_MAXMINTERACT]
```

Definition at line 1113 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.86 NCInput Struct Reference

Data Fields

- int [cldeg](#)
- int [clnum](#)
- int [cltyp](#)
- int [cmind](#)
- int [cmaxd](#)
- int [ptcl](#)
- int [cple](#)

3.86.1 Detailed Description

Definition at line 205 of file [grccparam.h](#).

3.86.2 Field Documentation

3.86.2.1 cldeg

```
int NCInput::cldeg
```

Definition at line 207 of file [grccparam.h](#).

3.86.2.2 clnum

```
int NCInput::clnum
```

Definition at line 208 of file [grccparam.h](#).

3.86.2.3 cltyp

```
int NCInput::cltyp
```

Definition at line 209 of file [grccparam.h](#).

3.86.2.4 cmind

```
int NCInput::cmind
```

Definition at line 210 of file [grccparam.h](#).

3.86.2.5 cmaxd

```
int NCInput::cmaxd
```

Definition at line 211 of file [grccparam.h](#).

3.86.2.6 ptcl

```
int NCInput::ptcl
```

Definition at line 214 of file [grccparam.h](#).

3.86.2.7 cple

```
int NCInput::cple
```

Definition at line 215 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.87 NeStInG Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [termsize](#)
- WORD * [funsize](#)
- WORD * [argsize](#)

3.87.1 Detailed Description

The NESTING struct is used when we enter the argument of functions and there is the possibility that we have to change something there. Because functions can be nested we have to keep track of all levels of functions in case we have to move the outer layers to make room for a larger function argument.

Definition at line [1033](#) of file [structs.h](#).

3.87.2 Field Documentation

3.87.2.1 termsize

```
WORD* NeStInG::termsize
```

Definition at line [1034](#) of file [structs.h](#).

3.87.2.2 funsize

```
WORD* NeStInG::funsize
```

Definition at line [1035](#) of file [structs.h](#).

3.87.2.3 argsize

```
WORD* NeStInG::argsize
```


Definition at line [1036](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.88 node Struct Reference

Collaboration diagram for node:



Public Member Functions

- [node](#) (const WORD *data)
- int [cmp](#) (const struct [node](#) *rhs) const
- bool [operator\(\)](#) (const struct [node](#) *lhs, const struct [node](#) *rhs) const
- void [calcHash](#) ()

Data Fields

- const WORD * [data](#)
- struct [node](#) * [l](#)
- struct [node](#) * [r](#)
- WORD [sign](#)
- UWORD [hash](#)

3.88.1 Detailed Description

Definition at line [1495](#) of file [optimize.cc](#).

3.88.2 Constructor & Destructor Documentation

3.88.2.1 node() [1/2]

```
node::node ( ) [inline]
```

Definition at line [1502](#) of file [optimize.cc](#).

3.88.2.2 node() [2/2]

```
node::node (
    const WORD * data ) [inline]
```

Definition at line [1503](#) of file [optimize.cc](#).

3.88.3 Member Function Documentation

3.88.3.1 cmp()

```
int node::cmp (
    const struct node * rhs ) const [inline]
```

Definition at line 1507 of file [optimize.cc](#).

3.88.3.2 operator()()

```
bool node::operator() (
    const struct node * lhs,
    const struct node * rhs ) const [inline]
```

Definition at line 1531 of file [optimize.cc](#).

3.88.3.3 calcHash()

```
void node::calcHash ( ) [inline]
```

Definition at line 1536 of file [optimize.cc](#).

3.88.4 Field Documentation

3.88.4.1 data

```
const WORD* node::data
```

Definition at line 1496 of file [optimize.cc](#).

3.88.4.2 l

```
struct node* node::l
```

Definition at line 1497 of file [optimize.cc](#).

3.88.4.3 r

```
struct node* node::r
```

Definition at line 1498 of file [optimize.cc](#).

3.88.4.4 sign

WORD node::sign

Definition at line 1499 of file [optimize.cc](#).

3.88.4.5 hash

UWORD node::hash

Definition at line 1500 of file [optimize.cc](#).

The documentation for this struct was generated from the following file:

- [optimize.cc](#)

3.89 NoDe Struct Reference

Collaboration diagram for NoDe:



Data Fields

- struct [NoDe](#) * [left](#)
- struct [NoDe](#) * [right](#)
- int [lloser](#)
- int [rloser](#)
- int [lsrc](#)
- int [rsrc](#)

3.89.1 Detailed Description

A node for the tree of losers in the final sorting on the master.

Definition at line 265 of file [parallel.c](#).

3.89.2 Field Documentation

3.89.2.1 left

```
struct NoDe* NoDe::left
```

Definition at line 266 of file [parallel.c](#).

3.89.2.2 right

```
struct NoDe* NoDe::right
```

Definition at line 267 of file [parallel.c](#).

3.89.2.3 lloser

```
int NoDe::lloser
```

Definition at line 268 of file [parallel.c](#).

3.89.2.4 rloser

```
int NoDe::rloser
```

Definition at line 269 of file [parallel.c](#).

3.89.2.5 lsrc

```
int NoDe::lsrc
```

Definition at line 270 of file [parallel.c](#).

3.89.2.6 rsrc

```
int NoDe::rsrc
```

Definition at line 271 of file [parallel.c](#).

The documentation for this struct was generated from the following file:

- [parallel.c](#)

3.90 NodeEq Struct Reference

Public Member Functions

- bool [operator\(\)](#) (const [NODE](#) *lhs, const [NODE](#) *rhs) const

3.90.1 Detailed Description

Definition at line 1557 of file [optimize.cc](#).

3.90.2 Member Function Documentation

3.90.2.1 operator()

```
bool NodeEq::operator() (
    const NODE * lhs,
    const NODE * rhs ) const [inline]
```

Definition at line 1558 of file [optimize.cc](#).

The documentation for this struct was generated from the following file:

- [optimize.cc](#)

3.91 NodeHash Struct Reference

Public Member Functions

- `size_t operator() (const NODE *n) const`

3.91.1 Detailed Description

Definition at line 1551 of file [optimize.cc](#).

3.91.2 Member Function Documentation

3.91.2.1 operator()

```
size_t NodeHash::operator() (
    const NODE * n ) const [inline]
```

Definition at line 1552 of file [optimize.cc](#).

The documentation for this struct was generated from the following file:

- [optimize.cc](#)

3.92 NStack Class Reference

Public Member Functions

- `void print (const char *msg)`

Data Fields

- int [noden](#)
- int [deg](#)
- NCandSt [st](#)
- int [nilist](#)
- int [ilist](#) [GRCC_MAXMINTERACT]

3.92.1 Detailed Description

Definition at line [1332](#) of file [grcc.h](#).

3.92.2 Constructor & Destructor Documentation

3.92.2.1 NStack()

```
NStack::NStack ( ) [inline]
```

Definition at line [1342](#) of file [grcc.h](#).

3.92.2.2 ~NStack()

```
NStack::~~NStack ( ) [inline]
```

Definition at line [1343](#) of file [grcc.h](#).

3.92.3 Member Function Documentation

3.92.3.1 print()

```
void NStack::print (
    const char * msg )
```

Definition at line [10224](#) of file [grcc.cc](#).

3.92.4 Field Documentation

3.92.4.1 noden

```
int NStack::noden
```

Definition at line [1336](#) of file [grcc.h](#).

3.92.4.2 deg

```
int NStack::deg
```

Definition at line 1337 of file [grcc.h](#).

3.92.4.3 st

```
NCandSt NStack::st
```

Definition at line 1338 of file [grcc.h](#).

3.92.4.4 nilist

```
int NStack::nilist
```

Definition at line 1339 of file [grcc.h](#).

3.92.4.5 ilist

```
int NStack::ilist[GRCC_MAXMINTERACT]
```

Definition at line 1340 of file [grcc.h](#).


The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.93 O_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for O_const:

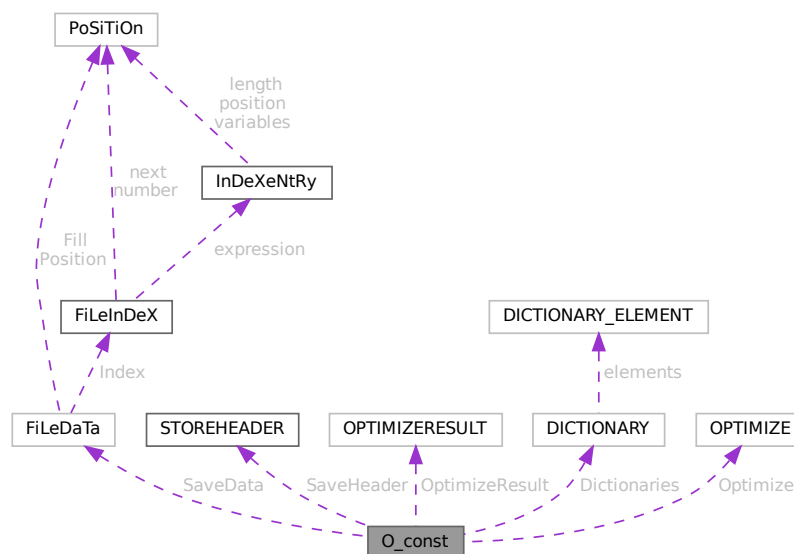

Data Fields

- FILEDATA SaveData
- STOREHEADER SaveHeader
- OPTIMIZERESULT OptimizeResult
- UBYTE * OutputLine
- UBYTE * OutStop
- UBYTE * OutFill
- WORD * bracket
- WORD * termbuf
- WORD * tabstring
- UBYTE * wpos
- UBYTE * wpoin
- UBYTE * DollarOutBuffer
- UBYTE * CurBufWrt
- void(* FlipWORD)(UBYTE *)
- void(* FlipLONG)(UBYTE *)
- void(* FlipPOS)(UBYTE *)
- void(* FlipPOINTER)(UBYTE *)
- void(* ResizeData)(UBYTE *, int, UBYTE *, int)
- void(* ResizeWORD)(UBYTE *, UBYTE *)
- void(* ResizeNCWORD)(UBYTE *, UBYTE *)
- void(* ResizeLONG)(UBYTE *, UBYTE *)
- void(* ResizePOS)(UBYTE *, UBYTE *)
- void(* ResizePOINTER)(UBYTE *, UBYTE *)
- void(* CheckPower)(UBYTE *)
- void(* RenumberVec)(UBYTE *)
- DICTIONARY ** Dictionaries
- UBYTE * tensorList
- WORD * inscheme
- LONG NumInBrack
- LONG wlen
- LONG DollarOutSizeBuffer
- LONG DollarInOutBuffer
- OPTIMIZE Optimize
- int OutInBuffer
- int NoSpacesInNumbers
- int BlockSpaces
- int CurrentDictionary
- int SizeDictionaries
- int NumDictionaries
- int CurDictNumbers
- int CurDictVariables
- int CurDictSpecials
- int CurDictFunWithArgs
- int CurDictNumberWarning
- int CurDictNotInFunctions
- int CurDictInDollars
- int gNumDictionaries
- int IndentSpace
- WORD schemenum
- WORD transFlag
- WORD powerFlag
- WORD mpower
- WORD resizeFlag

- WORD [bufferedInd](#)
- WORD [OutSkip](#)
- WORD [IsBracket](#)
- WORD [InFbrack](#)
- WORD [PrintType](#)
- WORD [FortFirst](#)
- WORD [DoubleFlag](#)
- WORD [FactorMode](#)
- WORD [FactorNum](#)
- WORD [ErrorBlock](#)
- WORD [OptimizationLevel](#)
- UBYTE [FortDotChar](#)

3.93.1 Detailed Description

The [O_const](#) struct is part of the global data and resides in the ALLGLOBALS struct A under the name O We see it used with the macro AO as in AO.OutputLine It contains variables that involve the writing of text output and save/store files.

Definition at line [2317](#) of file [structs.h](#).

3.93.2 Field Documentation

3.93.2.1 SaveData

[FILEDATA](#) [O_const::SaveData](#)

Definition at line [2318](#) of file [structs.h](#).

3.93.2.2 SaveHeader

[STOREHEADER](#) [O_const::SaveHeader](#)

Definition at line [2319](#) of file [structs.h](#).

3.93.2.3 OptimizeResult

[OPTIMIZERESULT](#) [O_const::OptimizeResult](#)

Definition at line [2320](#) of file [structs.h](#).

3.93.2.4 OutputLine

[UBYTE*](#) [O_const::OutputLine](#)

Definition at line [2321](#) of file [structs.h](#).

3.93.2.5 OutStop

UBYTE* O_const::OutStop

Definition at line 2322 of file [structs.h](#).

3.93.2.6 OutFill

UBYTE* O_const::OutFill

Definition at line 2323 of file [structs.h](#).

3.93.2.7 bracket

WORD* O_const::bracket

Definition at line 2324 of file [structs.h](#).

3.93.2.8 termbuf

WORD* O_const::termbuf

Definition at line 2325 of file [structs.h](#).

3.93.2.9 tabstring

WORD* O_const::tabstring

Definition at line 2326 of file [structs.h](#).

3.93.2.10 wpos

UBYTE* O_const::wpos

Definition at line 2327 of file [structs.h](#).

3.93.2.11 wpoin

UBYTE* O_const::wpoin

Definition at line 2328 of file [structs.h](#).

3.93.2.12 DollarOutBuffer

UBYTE* O_const::DollarOutBuffer

Definition at line 2329 of file [structs.h](#).

3.93.2.13 CurBufWrt

```
UBYTE* O_const::CurBufWrt
```

Definition at line 2330 of file [structs.h](#).

3.93.2.14 FlipWORD

```
void(* O_const::FlipWORD) (UBYTE *)
```

Definition at line 2331 of file [structs.h](#).

3.93.2.15 FlipLONG

```
void(* O_const::FlipLONG) (UBYTE *)
```

Definition at line 2332 of file [structs.h](#).

3.93.2.16 FlipPOS

```
void(* O_const::FlipPOS) (UBYTE *)
```

Definition at line 2333 of file [structs.h](#).

3.93.2.17 FlipPOINTER

```
void(* O_const::FlipPOINTER) (UBYTE *)
```

Definition at line 2334 of file [structs.h](#).

3.93.2.18 ResizeData

```
void(* O_const::ResizeData) (UBYTE *, int, UBYTE *, int)
```

Definition at line 2335 of file [structs.h](#).

3.93.2.19 ResizeWORD

```
void(* O_const::ResizeWORD) (UBYTE *, UBYTE *)
```

Definition at line 2336 of file [structs.h](#).

3.93.2.20 ResizeNCWORD

```
void(* O_const::ResizeNCWORD) (UBYTE *, UBYTE *)
```

Definition at line 2337 of file [structs.h](#).

3.93.2.21 ResizeLONG

```
void(* O_const::ResizeLONG) (UBYTE *, UBYTE *)
```

Definition at line 2338 of file [structs.h](#).

3.93.2.22 ResizePOS

```
void(* O_const::ResizePOS) (UBYTE *, UBYTE *)
```

Definition at line 2339 of file [structs.h](#).

3.93.2.23 ResizePOINTER

```
void(* O_const::ResizePOINTER) (UBYTE *, UBYTE *)
```

Definition at line 2340 of file [structs.h](#).

3.93.2.24 CheckPower

```
void(* O_const::CheckPower) (UBYTE *)
```

Definition at line 2341 of file [structs.h](#).

3.93.2.25 RenumberVec

```
void(* O_const::ReNUMBERVec) (UBYTE *)
```

Definition at line 2342 of file [structs.h](#).

3.93.2.26 Dictionaries

```
DICTIONARY** O_const::Dictionaries
```

Definition at line 2343 of file [structs.h](#).

3.93.2.27 tensorList

```
UBYTE* O_const::tensorList
```

Definition at line 2344 of file [structs.h](#).

3.93.2.28 inscheme

```
WORD* O_const::inscheme
```

Definition at line 2345 of file [structs.h](#).

3.93.2.29 NumInBrack

```
LONG O_const::NumInBrack
```

Definition at line 2351 of file [structs.h](#).

3.93.2.30 wlen

```
LONG O_const::wlen
```

Definition at line 2352 of file [structs.h](#).

3.93.2.31 DollarOutSizeBuffer

```
LONG O_const::DollarOutSizeBuffer
```

Definition at line 2353 of file [structs.h](#).

3.93.2.32 DollarInOutBuffer

```
LONG O_const::DollarInOutBuffer
```

Definition at line 2354 of file [structs.h](#).

3.93.2.33 Optimize

```
OPTIMIZE O_const::Optimize
```

Definition at line 2359 of file [structs.h](#).

3.93.2.34 OutInBuffer

```
int O_const::OutInBuffer
```

Definition at line 2360 of file [structs.h](#).

3.93.2.35 NoSpacesInNumbers

```
int O_const::NoSpacesInNumbers
```

Definition at line 2361 of file [structs.h](#).

3.93.2.36 BlockSpaces

```
int O_const::BlockSpaces
```

Definition at line 2362 of file [structs.h](#).

3.93.2.37 CurrentDictionary

```
int O_const::CurrentDictionary
```

Definition at line 2363 of file [structs.h](#).

3.93.2.38 SizeDictionaries

```
int O_const::SizeDictionaries
```

Definition at line 2364 of file [structs.h](#).

3.93.2.39 NumDictionaries

```
int O_const::NumDictionaries
```

Definition at line 2365 of file [structs.h](#).

3.93.2.40 CurDictNumbers

```
int O_const::CurDictNumbers
```

Definition at line 2366 of file [structs.h](#).

3.93.2.41 CurDictVariables

```
int O_const::CurDictVariables
```

Definition at line 2367 of file [structs.h](#).

3.93.2.42 CurDictSpecials

```
int O_const::CurDictSpecials
```

Definition at line 2368 of file [structs.h](#).

3.93.2.43 CurDictFunWithArgs

```
int O_const::CurDictFunWithArgs
```

Definition at line 2369 of file [structs.h](#).

3.93.2.44 CurDictNumberWarning

```
int O_const::CurDictNumberWarning
```

Definition at line 2370 of file [structs.h](#).

3.93.2.45 CurDictNotInFunctions

```
int O_const::CurDictNotInFunctions
```

Definition at line 2371 of file [structs.h](#).

3.93.2.46 CurDictInDollars

```
int O_const::CurDictInDollars
```

Definition at line 2372 of file [structs.h](#).

3.93.2.47 gNumDictionaries

```
int O_const::gNumDictionaries
```

Definition at line 2373 of file [structs.h](#).

3.93.2.48 IndentSpace

```
int O_const::IndentSpace
```

Definition at line 2374 of file [structs.h](#).

3.93.2.49 schemenum

```
WORD O_const::schemenum
```

Definition at line 2378 of file [structs.h](#).

3.93.2.50 transFlag

```
WORD O_const::transFlag
```

Definition at line 2379 of file [structs.h](#).

3.93.2.51 powerFlag

```
WORD O_const::powerFlag
```

Definition at line 2380 of file [structs.h](#).

3.93.2.52 mpower

```
WORD O_const::mpower
```

Definition at line 2381 of file [structs.h](#).

3.93.2.53 **resizeFlag**

WORD O_const::resizeFlag

Definition at line [2382](#) of file [structs.h](#).

3.93.2.54 **bufferedInd**

WORD O_const::bufferedInd

Definition at line [2383](#) of file [structs.h](#).

3.93.2.55 **OutSkip**

WORD O_const::OutSkip

Definition at line [2384](#) of file [structs.h](#).

3.93.2.56 **IsBracket**

WORD O_const::IsBracket

Definition at line [2385](#) of file [structs.h](#).

3.93.2.57 **InFbrack**

WORD O_const::InFbrack

Definition at line [2386](#) of file [structs.h](#).

3.93.2.58 **PrintType**

WORD O_const::PrintType

Definition at line [2387](#) of file [structs.h](#).

3.93.2.59 **FortFirst**

WORD O_const::FortFirst

Definition at line [2388](#) of file [structs.h](#).

3.93.2.60 **DoubleFlag**

WORD O_const::DoubleFlag

Definition at line [2389](#) of file [structs.h](#).

3.93.2.61 FactorMode

WORD O_const::FactorMode

Definition at line 2390 of file [structs.h](#).

3.93.2.62 FactorNum

WORD O_const::FactorNum

Definition at line 2391 of file [structs.h](#).

3.93.2.63 ErrorBlock

WORD O_const::ErrorBlock

Definition at line 2392 of file [structs.h](#).

3.93.2.64 OptimizationLevel

WORD O_const::OptimizationLevel

Definition at line 2393 of file [structs.h](#).

3.93.2.65 FortDotChar

UBYTE O_const::FortDotChar

Definition at line 2394 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.94 objects Struct Reference

Data Fields

- MLONG [position](#)
- MLONG [size](#)
- MLONG [date](#)
- MLONG [tablename](#)
- MLONG [uncompressed](#)
- MLONG [spare1](#)
- MLONG [spare2](#)
- MLONG [spare3](#)
- char [element](#) [ELEMENTSIZE]

3.94.1 Detailed Description

Definition at line 97 of file [minos.h](#).

3.94.2 Field Documentation

3.94.2.1 position

```
MLONG objects::position
```

Definition at line 99 of file [minos.h](#).

3.94.2.2 size

```
MLONG objects::size
```

Definition at line 100 of file [minos.h](#).

3.94.2.3 date

```
MLONG objects::date
```

Definition at line 101 of file [minos.h](#).

3.94.2.4 tablenumber

```
MLONG objects::tablenumber
```

Definition at line 102 of file [minos.h](#).

3.94.2.5 uncompressed

```
MLONG objects::uncompressed
```

Definition at line 103 of file [minos.h](#).

3.94.2.6 spare1

```
MLONG objects::spare1
```

Definition at line 104 of file [minos.h](#).

3.94.2.7 spare2

```
MLONG objects::spare2
```

Definition at line 105 of file [minos.h](#).

3.94.2.8 spare3

```
MLONG objects::spare3
```

Definition at line 106 of file [minos.h](#).

3.94.2.9 element

```
char objects::element[ELEMENTSIZE]
```

Definition at line 107 of file [minos.h](#).

The documentation for this struct was generated from the following file:

- [minos.h](#)

3.95 OptDef Struct Reference

Data Fields

- const char * [name](#)
- const char * [mean](#)
- int [defaultv](#)
- int [DUMMYPADDING](#)

3.95.1 Detailed Description

Definition at line 124 of file [grccparam.h](#).

3.95.2 Field Documentation

3.95.2.1 name

```
const char* OptDef::name
```

Definition at line 125 of file [grccparam.h](#).

3.95.2.2 mean

```
const char* OptDef::mean
```

Definition at line 126 of file [grccparam.h](#).

3.95.2.3 defaultv

```
int OptDef::defaultv
```

Definition at line 127 of file [grccparam.h](#).

3.95.2.4 DUMMYPADDING

```
int OptDef::DUMMYPADDING
```


Definition at line 128 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.96 optimization Class Reference

Collaboration diagram for optimization:

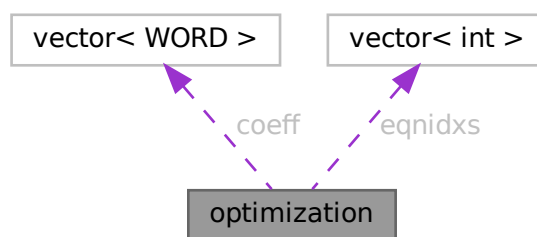

Public Member Functions

- `bool operator< (const optimization &a) const`

Data Fields

- int [type](#)
- int [arg1](#)
- int [arg2](#)
- int [improve](#)
- vector< WORD > [coeff](#)
- vector< int > [eqnidxs](#)

3.96.1 Detailed Description

class Optimization

3.96.2 Description

This object represents an optimization. Its type is a number in the range 0 to 5. Depending on this type, the variables `arg1`, `arg2` and `coeff` indicate:

type==0 : optimization of the form $x[\text{arg1}] \wedge \text{arg2}$ (coeff=empty) type==1 : optimization of the form $x[\text{arg1}] * x[\text{arg2}]$ (coeff=empty) type==2 : optimization of the form $x[\text{arg1}] * \text{coeff}$ (arg2=0) type==3 : optimization of the form $x[\text{arg1}] + \text{coeff}$ (arg2=0) type==4 : optimization of the form $x[\text{arg1}] + x[\text{arg2}]$ (coeff=empty) type==5 : optimization of the form $x[\text{arg1}] - x[\text{arg2}]$ (coeff=empty)

Here, "`x[arg]`" represents a symbol (if positive) or an extrasymbol (if negative). The represented symbol's id is `ABS(x[arg])-1`.

"eqns" is a list of equation, where this optimization can be performed.

"improve" is the total improvement of this optimization.

Definition at line [2669](#) of file [optimize.cc](#).

3.96.3 Member Function Documentation

3.96.3.1 operator<()

```
bool optimization::operator< (
    const optimization & a ) const [inline]
```

Definition at line [2675](#) of file [optimize.cc](#).

3.96.4 Field Documentation

3.96.4.1 type

```
int optimization::type
```

Definition at line [2671](#) of file [optimize.cc](#).

3.96.4.2 arg1

```
int optimization::arg1
```

Definition at line 2671 of file [optimize.cc](#).

3.96.4.3 arg2

```
int optimization::arg2
```

Definition at line 2671 of file [optimize.cc](#).

3.96.4.4 improve

```
int optimization::improve
```

Definition at line 2671 of file [optimize.cc](#).

3.96.4.5 coeff

```
vector<WORD> optimization::coeff
```

Definition at line 2672 of file [optimize.cc](#).

3.96.4.6 eqnidxs

```
vector<int> optimization::eqnidxs
```

Definition at line 2673 of file [optimize.cc](#).

The documentation for this class was generated from the following file:

- [optimize.cc](#)

3.97 OPTIMIZE Struct Reference

Data Fields

- union {
 float [fval](#)
 int [ival](#) [2]
} **mctsconstant**
- int [horner](#)
- int [hornerdirection](#)
- int [method](#)
- int [mctstimelimit](#)
- int [mctsnumexpand](#)
- int [mctsnumkeep](#)
- int [mctsnumrepeat](#)
- int [greedytimelimit](#)
- int [greedyminnum](#)
- int [greedymaxperc](#)
- int [printstats](#)
- int [debugflags](#)
- int [schemeflags](#)
- int [mctsdecaymode](#)
- int [salter](#)
- union {
 float [fval](#)
 int [ival](#) [2]
} **saMaxT**
- union {
 float [fval](#)
 int [ival](#) [2]
} **saMinT**
- int [spare](#)

3.97.1 Detailed Description

Definition at line [1279](#) of file [structs.h](#).

3.97.2 Field Documentation

3.97.2.1 fval

```
float OPTIMIZE::fval
```

Definition at line [1281](#) of file [structs.h](#).

3.97.2.2 ival

```
int OPTIMIZE::ival[2]
```

Definition at line [1282](#) of file [structs.h](#).

3.97.2.3 horner

```
int OPTIMIZE::horner
```

Definition at line 1284 of file [structs.h](#).

3.97.2.4 hornerdirection

```
int OPTIMIZE::hornerdirection
```

Definition at line 1285 of file [structs.h](#).

3.97.2.5 method

```
int OPTIMIZE::method
```

Definition at line 1286 of file [structs.h](#).

3.97.2.6 mctstimelimit

```
int OPTIMIZE::mctstimelimit
```

Definition at line 1287 of file [structs.h](#).

3.97.2.7 mctsnumexpand

```
int OPTIMIZE::mctsnumexpand
```

Definition at line 1288 of file [structs.h](#).

3.97.2.8 mctsnumkeep

```
int OPTIMIZE::mctsnumkeep
```

Definition at line 1289 of file [structs.h](#).

3.97.2.9 mctsnumrepeat

```
int OPTIMIZE::mctsnumrepeat
```

Definition at line 1290 of file [structs.h](#).

3.97.2.10 greedytimelimit

```
int OPTIMIZE::greedytimelimit
```

Definition at line 1291 of file [structs.h](#).

3.97.2.11 greedyminnum

```
int OPTIMIZE::greedyminnum
```

Definition at line 1292 of file [structs.h](#).

3.97.2.12 greedymaxperc

```
int OPTIMIZE::greedymaxperc
```

Definition at line 1293 of file [structs.h](#).

3.97.2.13 printstats

```
int OPTIMIZE::printstats
```

Definition at line 1294 of file [structs.h](#).

3.97.2.14 debugflags

```
int OPTIMIZE::debugflags
```

Definition at line 1295 of file [structs.h](#).

3.97.2.15 schemeflags

```
int OPTIMIZE::schemeflags
```

Definition at line 1296 of file [structs.h](#).

3.97.2.16 mctsdecaymode

```
int OPTIMIZE::mctsdecaymode
```

Definition at line 1297 of file [structs.h](#).

3.97.2.17 salter

```
int OPTIMIZE::saIter
```

Definition at line 1298 of file [structs.h](#).

3.97.2.18 spare

```
int OPTIMIZE::spare
```

Definition at line 1307 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.98 OPTIMIZERESULT Struct Reference

Data Fields

- WORD * [code](#)
- UBYTE * [nameofexpr](#)
- LONG [codesize](#)
- WORD [exprnr](#)
- WORD [minvar](#)
- WORD [maxvar](#)

3.98.1 Detailed Description

Definition at line 1310 of file [structs.h](#).

3.98.2 Field Documentation

3.98.2.1 code

```
WORD* OPTIMIZERESULT::code
```

Definition at line 1311 of file [structs.h](#).

3.98.2.2 nameofexpr

```
UBYTE* OPTIMIZERESULT::nameofexpr
```

Definition at line 1312 of file [structs.h](#).

3.98.2.3 codesize

```
LONG OPTIMIZERESULT::codesize
```

Definition at line 1313 of file [structs.h](#).

Public Member Functions

- void [setDefaultValues](#) (void)
- void [setOldDefaultValues](#) (void)
- void [setValue](#) (int ind, int val)
- int [getValue](#) (int ind)
- void [setQGrafOpt](#) (int *qgopt)
- void [print](#) (void)
- void [setOutputF](#) (Bool outgrf, const char *fname)
- void [setOutputP](#) (Bool outgrp, const char *fname)
- void [printLevel](#) (int l)
- void [printModel](#) (void)
- void [setOutMG](#) (OutEGB *omg, void *pt)
- void [setOutAG](#) (OutEG *oag, void *pt)
- void [setEndMG](#) (OutEGB *omg, void *pt)
- void [setErExit](#) (ErExit *ere, void *pt)
- const [OptDef](#) * [getDef](#) (void)
- const [OptDef](#) * [getOldDef](#) (void)
- const [OptQGDef](#) * [getQGDef](#) (void)
- void [begin](#) ([Model](#) *mdl)
- void [end](#) (void)
- void [beginProc](#) ([Process](#) *prc)
- void [endProc](#) (void)
- void [beginSubProc](#) ([SProcess](#) *sprc)
- void [endSubProc](#) (void)
- void [newMGraph](#) ([MGraph](#) *mgr)
- void [newAGraph](#) ([EGraph](#) *egr)
- void [outModel](#) (void)

Data Fields

- [Model](#) * [model](#)
- [Process](#) * [proc](#)
- [SProcess](#) * [sprc](#)
- [Output](#) * [out](#)
- OutEGB * [outmg](#)
- OutEGB * [endmg](#)
- OutEG * [outag](#)
- void * [argmg](#)
- void * [argemg](#)
- void * [argag](#)
- [OptQGRef](#) [qgref](#) [2 *GRCC_QGRAf_OPT_Size]
- int [values](#) [GRCC_OPT_Size]
- int [qgopt](#) [GRCC_QGRAf_OPT_Size]
- int [nqgopt](#)
- int [DUMMYPADDING](#)
- double [time0](#)
- double [time1](#)

3.99.1 Detailed Description

Definition at line 101 of file [grcc.h](#).

3.99.2 Constructor & Destructor Documentation

3.99.2.1 Options()

```
Options::Options (
    void )
```

Definition at line 199 of file [grcc.cc](#).

3.99.2.2 ~Options()

```
Options::~~Options (
    void )
```

Definition at line 260 of file [grcc.cc](#).

3.99.3 Member Function Documentation

3.99.3.1 setDefaultValues()

```
void Options::setDefaultValues (
    void )
```

Definition at line 272 of file [grcc.cc](#).

3.99.3.2 setOldDefaultValues()

```
void Options::setOldDefaultValues (
    void )
```

Definition at line 288 of file [grcc.cc](#).

3.99.3.3 setValue()

```
void Options::setValue (
    int ind,
    int val )
```

Definition at line 338 of file [grcc.cc](#).

3.99.3.4 getValue()

```
int Options::getValue (
    int ind )
```

Definition at line 353 of file [grcc.cc](#).

3.99.3.5 setQGrafOpt()

```
void Options::setQGrafOpt (
    int * qgopt )
```

Definition at line [367](#) of file [grcc.cc](#).

3.99.3.6 print()

```
void Options::print (
    void )
```

Definition at line [442](#) of file [grcc.cc](#).

3.99.3.7 setOutputF()

```
void Options::setOutputF (
    Bool outgrf,
    const char * fname )
```

Definition at line [480](#) of file [grcc.cc](#).

3.99.3.8 setOutputP()

```
void Options::setOutputP (
    Bool outgrp,
    const char * fname )
```

Definition at line [487](#) of file [grcc.cc](#).

3.99.3.9 printLevel()

```
void Options::printLevel (
    int l )
```

Definition at line [332](#) of file [grcc.cc](#).

3.99.3.10 printModel()

```
void Options::printModel (
    void )
```

Definition at line [494](#) of file [grcc.cc](#).

3.99.3.11 setOutMG()

```
void Options::setOutMG (
    OutEGB * omg,
    void * pt )
```

Definition at line 304 of file [grcc.cc](#).

3.99.3.12 setOutAG()

```
void Options::setOutAG (
    OutEG * oag,
    void * pt )
```

Definition at line 318 of file [grcc.cc](#).

3.99.3.13 setEndMG()

```
void Options::setEndMG (
    OutEGB * omg,
    void * pt )
```

Definition at line 311 of file [grcc.cc](#).

3.99.3.14 setErExit()

```
void Options::setErExit (
    ErExit * ere,
    void * pt )
```

Definition at line 325 of file [grcc.cc](#).

3.99.3.15 getDef()

```
const OptDef * Options::getDef (
    void )
```

Definition at line 462 of file [grcc.cc](#).

3.99.3.16 getOldDef()

```
const OptDef * Options::getOldDef (
    void )
```

Definition at line 468 of file [grcc.cc](#).

3.99.3.17 getQGDef()

```
const OptQGDef * Options::getQGDef (
    void )
```

Definition at line 474 of file [grcc.cc](#).

3.99.3.18 begin()

```
void Options::begin (
    Model * mdl )
```

Definition at line 515 of file [grcc.cc](#).

3.99.3.19 end()

```
void Options::end (
    void )
```

Definition at line 535 of file [grcc.cc](#).

3.99.3.20 beginProc()

```
void Options::beginProc (
    Process * prc )
```

Definition at line 567 of file [grcc.cc](#).

3.99.3.21 endProc()

```
void Options::endProc (
    void )
```

Definition at line 583 of file [grcc.cc](#).

3.99.3.22 beginSubProc()

```
void Options::beginSubProc (
    SProcess * sprc )
```

Definition at line 672 of file [grcc.cc](#).

3.99.3.23 endSubProc()

```
void Options::endSubProc (
    void )
```

Definition at line 693 of file [grcc.cc](#).

3.99.3.24 newMGraph()

```
void Options::newMGraph (
    MGraph * mgr )
```

Definition at line 761 of file [grcc.cc](#).

3.99.3.25 newAGraph()

```
void Options::newAGraph (
    EGraph * egr )
```

Definition at line 791 of file [grcc.cc](#).

3.99.3.26 outModel()

```
void Options::outModel (
    void )
```

Definition at line 506 of file [grcc.cc](#).

3.99.4 Field Documentation

3.99.4.1 model

```
Model* Options::model
```

Definition at line 104 of file [grcc.h](#).

3.99.4.2 proc

```
Process* Options::proc
```

Definition at line 105 of file [grcc.h](#).

3.99.4.3 sproc

```
SProcess* Options::sproc
```

Definition at line 106 of file [grcc.h](#).

3.99.4.4 out

```
Output* Options::out
```

Definition at line 107 of file [grcc.h](#).

3.99.4.5 outmg

OutEGB* Options::outmg

Definition at line 108 of file [grcc.h](#).

3.99.4.6 endmg

OutEGB* Options::endmg

Definition at line 109 of file [grcc.h](#).

3.99.4.7 outag

OutEG* Options::outag

Definition at line 110 of file [grcc.h](#).

3.99.4.8 argmg

void* Options::argmg

Definition at line 111 of file [grcc.h](#).

3.99.4.9 argemg

void* Options::argemg

Definition at line 112 of file [grcc.h](#).

3.99.4.10 argag

void* Options::argag

Definition at line 113 of file [grcc.h](#).

3.99.4.11 qqref

[OptQGRef](#) Options::qqref[2 *GRCC_QGRAF_OPT_Size]

Definition at line 116 of file [grcc.h](#).

3.99.4.12 values

int Options::values[GRCC_OPT_Size]

Definition at line 117 of file [grcc.h](#).

3.99.4.13 qgopt

```
int Options::qgopt[GRCC_QGRAF_OPT_Size]
```

Definition at line 118 of file [grcc.h](#).

3.99.4.14 nqgopt

```
int Options::nqgopt
```

Definition at line 120 of file [grcc.h](#).

3.99.4.15 DUMMYPADDING

```
int Options::DUMMYPADDING
```

Definition at line 122 of file [grcc.h](#).

3.99.4.16 time0

```
double Options::time0
```

Definition at line 125 of file [grcc.h](#).

3.99.4.17 time1

```
double Options::time1
```

Definition at line 126 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.100 OptQGDef Struct Reference

Data Fields

- const char * [name](#)
- const char * [cname](#)
- const char * [mean](#)

3.100.1 Detailed Description

Definition at line 131 of file [grccparam.h](#).

3.100.2 Field Documentation

3.100.2.1 name

```
const char* OptQGDef::name
```

Definition at line 132 of file [grccparam.h](#).

3.100.2.2 cname

```
const char* OptQGDef::cname
```

Definition at line 133 of file [grccparam.h](#).

3.100.2.3 mean

```
const char* OptQGDef::mean
```

Definition at line 134 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.101 OptQGRef Struct Reference

Data Fields

- const char * [name](#)
- int [index](#)
- int [sign](#)

3.101.1 Detailed Description

Definition at line 137 of file [grccparam.h](#).

3.101.2 Field Documentation

3.101.2.1 name

```
const char* OptQGRef::name
```

Definition at line 138 of file [grccparam.h](#).

3.101.2.2 index

int OptQGRef::index

Definition at line 139 of file [grccparam.h](#).

3.101.2.3 sign

int OptQGRef::sign


Definition at line 140 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.102 Output Class Reference

Collaboration diagram for Output:

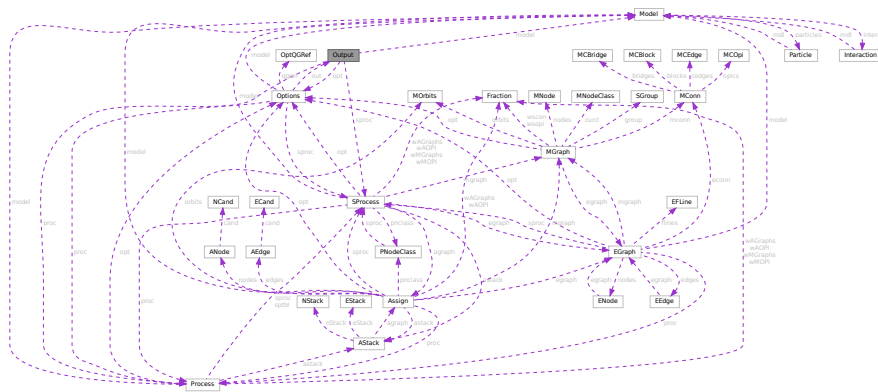

Public Member Functions

- [Output](#) ([Options](#) *optn)
- void [setOutgrf](#) (const char *fname)
- void [setOutgrp](#) (const char *fname)
- Bool [outBeginF](#) ([Model](#) *mdl, Bool pr)
- Bool [outBeginP](#) ([Model](#) *mdl, Bool pr)
- void [outEndF](#) (void)
- void [outEndP](#) (void)
- void [outProcBeginF](#) ([Process](#) *prc)
- void [outProcBeginP](#) ([Process](#) *prc)
- void [outProcBegin0](#) (int next, int couple, int loop)
- void [outSProcBeginF](#) ([SProcess](#) *sprc)
- void [outSProcBeginP](#) ([SProcess](#) *sprc)
- void [outProcEndF](#) (void)
- void [outProcEndP](#) (void)
- void [outEGraphF](#) ([EGraph](#) *egraph)
- void [outEGraphP](#) ([EGraph](#) *egraph)
- void [outModelF](#) (void)
- void [outModelP](#) (void)

Data Fields

- [Options](#) * [opt](#)
- [Model](#) * [model](#)
- [Process](#) * [proc](#)
- [SProcess](#) * [sproc](#)
- char * [outgrf](#)
- FILE * [outgrfp](#)
- char * [outgrp](#)
- FILE * [outgrpp](#)
- int [proclid](#)
- Bool [outproc](#)

3.102.1 Detailed Description

Definition at line [166](#) of file [grcc.h](#).

3.102.2 Constructor & Destructor Documentation

3.102.2.1 Output()

```
Output::Output (
    Options * optn )
```

Definition at line [831](#) of file [grcc.cc](#).

3.102.2.2 ~Output()

```
Output::~~Output (
    void )
```

Definition at line [847](#) of file [grcc.cc](#).

3.102.3 Member Function Documentation

3.102.3.1 setOutgrf()

```
void Output::setOutgrf (
    const char * fname )
```

Definition at line [878](#) of file [grcc.cc](#).

3.102.3.2 setOutgrp()

```
void Output::setOutgrp (
    const char * fname )
```

Definition at line [896](#) of file [grcc.cc](#).

3.102.3.3 outBeginF()

```
Bool Output::outBeginF (
    Model * mdl,
    Bool pr )
```

Definition at line 913 of file [grcc.cc](#).

3.102.3.4 outBeginP()

```
Bool Output::outBeginP (
    Model * mdl,
    Bool pr )
```

Definition at line 959 of file [grcc.cc](#).

3.102.3.5 outEndF()

```
void Output::outEndF (
    void )
```

Definition at line 998 of file [grcc.cc](#).

3.102.3.6 outEndP()

```
void Output::outEndP (
    void )
```

Definition at line 1014 of file [grcc.cc](#).

3.102.3.7 outProcBeginF()

```
void Output::outProcBeginF (
    Process * prc )
```

Definition at line 1030 of file [grcc.cc](#).

3.102.3.8 outProcBeginP()

```
void Output::outProcBeginP (
    Process * prc )
```

Definition at line 1075 of file [grcc.cc](#).

3.102.3.9 outProcBegin0()

```
void Output::outProcBegin0 (
    int next,
    int couple,
    int loop )
```

Definition at line 1097 of file [grcc.cc](#).

3.102.3.10 outSProcBeginF()

```
void Output::outSProcBeginF (
    SProcess * sprc )
```

Definition at line 1134 of file [grcc.cc](#).

3.102.3.11 outSProcBeginP()

```
void Output::outSProcBeginP (
    SProcess * sprc )
```

Definition at line 1189 of file [grcc.cc](#).

3.102.3.12 outProcEndF()

```
void Output::outProcEndF (
    void )
```

Definition at line 1209 of file [grcc.cc](#).

3.102.3.13 outProcEndP()

```
void Output::outProcEndP (
    void )
```

Definition at line 1228 of file [grcc.cc](#).

3.102.3.14 outEGraphF()

```
void Output::outEGraphF (
    EGraph * egraph )
```

Definition at line 1237 of file [grcc.cc](#).

3.102.3.15 outEGraphP()

```
void Output::outEGraphP (
    EGraph * egraph )
```

Definition at line 1377 of file [grcc.cc](#).

3.102.3.16 outModelF()

```
void Output::outModelF (  
    void )
```

Definition at line 1490 of file [grcc.cc](#).

3.102.3.17 outModelP()

```
void Output::outModelP (  
    void )
```

Definition at line 1571 of file [grcc.cc](#).

3.102.4 Field Documentation

3.102.4.1 opt

[Options*](#) Output::opt

Definition at line 169 of file [grcc.h](#).

3.102.4.2 model

[Model*](#) Output::model

Definition at line 170 of file [grcc.h](#).

3.102.4.3 proc

[Process*](#) Output::proc

Definition at line 171 of file [grcc.h](#).

3.102.4.4 sproc

[SProcess*](#) Output::sproc

Definition at line 172 of file [grcc.h](#).

3.102.4.5 outgrf

[char*](#) Output::outgrf

Definition at line 173 of file [grcc.h](#).

3.102.4.6 outgrfp

FILE* Output::outgrfp

Definition at line 174 of file [grcc.h](#).

3.102.4.7 outgrp

char* Output::outgrp

Definition at line 175 of file [grcc.h](#).

3.102.4.8 outgrpp

FILE* Output::outgrpp

Definition at line 176 of file [grcc.h](#).

3.102.4.9 proclId

int Output::procId

Definition at line 177 of file [grcc.h](#).

3.102.4.10 outproc

Bool Output::outproc

Definition at line 178 of file [grcc.h](#).


The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.103 P_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for P_const:

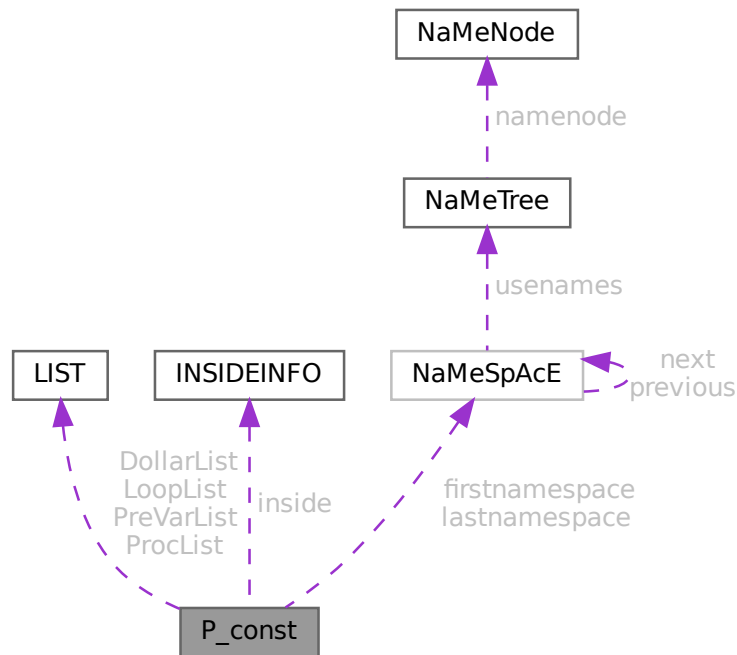

Data Fields

- `LIST` `DollarList`
- `LIST` `PreVarList`
- `LIST` `LoopList`
- `LIST` `ProcList`
- `INSIDEINFO` `inside`
- `NAMESPACE` * `firstnamespace`
- `NAMESPACE` * `lastnamespace`
- `UBYTE` * `fullname`
- `UBYTE` ** `PreSwitchStrings`
- `UBYTE` * `preStart`
- `UBYTE` * `preStop`
- `UBYTE` * `preFill`
- `UBYTE` * `procedureExtension`
- `UBYTE` * `cprocedureExtension`
- `LONG` * `PreAssignStack`
- `int` * `PreIfStack`
- `int` * `PreSwitchModes`
- `int` * `PreTypes`

- LONG [StopWatchZero](#)
- LONG [InOutBuf](#)
- LONG [pSize](#)
- int [PreAssignFlag](#)
- int [PreContinuation](#)
- int [PreproFlag](#)
- int [iBufError](#)
- int [PreOut](#)
- int [PreSwitchLevel](#)
- int [NumPreSwitchStrings](#)
- int [MaxPreTypes](#)
- int [NumPreTypes](#)
- int [MaxPreIfLevel](#)
- int [PreIfLevel](#)
- int [PreInsideLevel](#)
- int [DelayPrevar](#)
- int [AllowDelay](#)
- int [lhdollarerror](#)
- int [eat](#)
- int [gNumPre](#)
- int [PreDebug](#)
- int [OpenDictionary](#)
- int [PreAssignLevel](#)
- int [MaxPreAssignLevel](#)
- int [fullnamesize](#)
- WORD [DebugFlag](#)
- WORD [preError](#)
- UBYTE [ComChar](#)
- UBYTE [cComChar](#)

3.103.1 Detailed Description

The [P_const](#) struct is part of the global data and resides in the ALLGLOBALS struct A under the name P We see it used with the macro AP as in AP.InOutBuf It contains objects that have dealings with the preprocessor.

Definition at line [1580](#) of file [structs.h](#).

3.103.2 Field Documentation

3.103.2.1 DollarList

```
LIST P_const::DollarList
```

Definition at line [1581](#) of file [structs.h](#).

3.103.2.2 PreVarList

```
LIST P_const::PreVarList
```

Definition at line [1583](#) of file [structs.h](#).

3.103.2.3 LoopList

`LIST P_const::LoopList`

Definition at line 1585 of file [structs.h](#).

3.103.2.4 ProcList

`LIST P_const::ProcList`

Definition at line 1586 of file [structs.h](#).

3.103.2.5 inside

`INSIDEINFO P_const::inside`

Definition at line 1587 of file [structs.h](#).

3.103.2.6 firstnamespace

`NAMESPACE* P_const::firstnamespace`

Definition at line 1588 of file [structs.h](#).

3.103.2.7 lastnamespace

`NAMESPACE* P_const::lastnamespace`

Definition at line 1589 of file [structs.h](#).

3.103.2.8 fullname

`UBYTE* P_const::fullname`

Definition at line 1590 of file [structs.h](#).

3.103.2.9 PreSwitchStrings

`UBYTE** P_const::PreSwitchStrings`

Definition at line 1591 of file [structs.h](#).

3.103.2.10 preStart

`UBYTE* P_const::preStart`

Definition at line 1592 of file [structs.h](#).

3.103.2.11 preStop

```
UBYTE* P_const::preStop
```

Definition at line 1593 of file [structs.h](#).

3.103.2.12 preFill

```
UBYTE* P_const::preFill
```

Definition at line 1594 of file [structs.h](#).

3.103.2.13 procedureExtension

```
UBYTE* P_const::procedureExtension
```

Definition at line 1595 of file [structs.h](#).

3.103.2.14 cprocedureExtension

```
UBYTE* P_const::cprocedureExtension
```

Definition at line 1596 of file [structs.h](#).

3.103.2.15 PreAssignStack

```
LONG* P_const::PreAssignStack
```

Definition at line 1597 of file [structs.h](#).

3.103.2.16 PreIfStack

```
int* P_const::PreIfStack
```

Definition at line 1598 of file [structs.h](#).

3.103.2.17 PreSwitchModes

```
int* P_const::PreSwitchModes
```

Definition at line 1599 of file [structs.h](#).

3.103.2.18 PreTypes

```
int* P_const::PreTypes
```

Definition at line 1600 of file [structs.h](#).

3.103.2.19 StopWatchZero

LONG P_const::StopWatchZero

Definition at line 1604 of file [structs.h](#).

3.103.2.20 InOutBuf

LONG P_const::InOutBuf

Definition at line 1605 of file [structs.h](#).

3.103.2.21 pSize

LONG P_const::pSize

Definition at line 1606 of file [structs.h](#).

3.103.2.22 PreAssignFlag

int P_const::PreAssignFlag

Definition at line 1607 of file [structs.h](#).

3.103.2.23 PreContinuation

int P_const::PreContinuation

Definition at line 1608 of file [structs.h](#).

3.103.2.24 PreproFlag

int P_const::PreproFlag

Definition at line 1609 of file [structs.h](#).

3.103.2.25 iBufError

int P_const::iBufError

Definition at line 1610 of file [structs.h](#).

3.103.2.26 PreOut

int P_const::PreOut

Definition at line 1611 of file [structs.h](#).

3.103.2.27 PreSwitchLevel

```
int P_const::PreSwitchLevel
```

Definition at line 1612 of file [structs.h](#).

3.103.2.28 NumPreSwitchStrings

```
int P_const::NumPreSwitchStrings
```

Definition at line 1613 of file [structs.h](#).

3.103.2.29 MaxPreTypes

```
int P_const::MaxPreTypes
```

Definition at line 1614 of file [structs.h](#).

3.103.2.30 NumPreTypes

```
int P_const::NumPreTypes
```

Definition at line 1615 of file [structs.h](#).

3.103.2.31 MaxPreIfLevel

```
int P_const::MaxPreIfLevel
```

Definition at line 1616 of file [structs.h](#).

3.103.2.32 PreIfLevel

```
int P_const::PreIfLevel
```

Definition at line 1617 of file [structs.h](#).

3.103.2.33 PreInsideLevel

```
int P_const::PreInsideLevel
```

Definition at line 1618 of file [structs.h](#).

3.103.2.34 DelayPrevar

```
int P_const::DelayPrevar
```

Definition at line 1619 of file [structs.h](#).

3.103.2.35 AllowDelay

```
int P_const::AllowDelay
```

Definition at line 1620 of file [structs.h](#).

3.103.2.36 lhdollarerror

```
int P_const::lhdollarerror
```

Definition at line 1621 of file [structs.h](#).

3.103.2.37 eat

```
int P_const::eat
```

Definition at line 1622 of file [structs.h](#).

3.103.2.38 gNumPre

```
int P_const::gNumPre
```

Definition at line 1623 of file [structs.h](#).

3.103.2.39 PreDebug

```
int P_const::PreDebug
```

Definition at line 1624 of file [structs.h](#).

3.103.2.40 OpenDictionary

```
int P_const::OpenDictionary
```

Definition at line 1625 of file [structs.h](#).

3.103.2.41 PreAssignLevel

```
int P_const::PreAssignLevel
```

Definition at line 1626 of file [structs.h](#).

3.103.2.42 MaxPreAssignLevel

```
int P_const::MaxPreAssignLevel
```

Definition at line 1627 of file [structs.h](#).

3.103.2.43 fullnamesize

```
int P_const::fullnamesize
```

Definition at line 1628 of file [structs.h](#).

3.103.2.44 DebugFlag

```
WORD P_const::DebugFlag
```

Definition at line 1629 of file [structs.h](#).

3.103.2.45 preError

```
WORD P_const::preError
```

Definition at line 1630 of file [structs.h](#).

3.103.2.46 ComChar

```
UBYTE P_const::ComChar
```

Definition at line 1631 of file [structs.h](#).

3.103.2.47 cComChar

```
UBYTE P_const::cComChar
```


Definition at line 1632 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.104 ParallelVars Struct Reference

Collaboration diagram for ParallelVars:

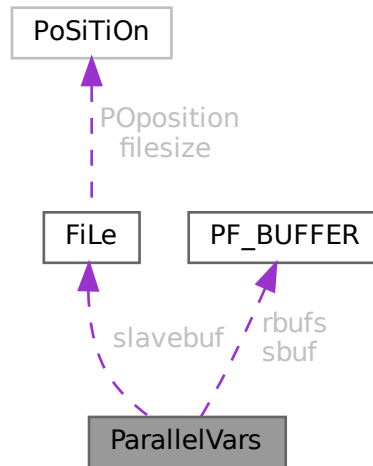

Data Fields

- `FILEHANDLE` `slavebuf`
- `PF_BUFFER` * `sbuf`
- `PF_BUFFER` ** `rbufs`
- `int` `me`
- `int` `numtasks`
- `int` `parallel`
- `int` `rhsInParallel`
- `int` `mkSlaveInfile`
- `int` `exprbufsize`
- `int` `exprtodo`
- `int` `log`
- `WORD` `numsbufs`
- `WORD` `numrbufs`

3.104.1 Detailed Description

Definition at line 168 of file `parallel.h`.

3.104.2 Field Documentation

3.104.2.1 `slavebuf`

`FILEHANDLE` `ParallelVars::slavebuf`

Definition at line 169 of file `parallel.h`.

3.104.2.2 sbuf

`PF_BUFFER* ParallelVars::sbuf`

Definition at line 171 of file [parallel.h](#).

3.104.2.3 rbufs

`PF_BUFFER** ParallelVars::rbufs`

Definition at line 172 of file [parallel.h](#).

3.104.2.4 me

`int ParallelVars::me`

Definition at line 173 of file [parallel.h](#).

3.104.2.5 numtasks

`int ParallelVars::numtasks`

Definition at line 174 of file [parallel.h](#).

3.104.2.6 parallel

`int ParallelVars::parallel`

Definition at line 175 of file [parallel.h](#).

3.104.2.7 rhsInParallel

`int ParallelVars::rhsInParallel`

Definition at line 177 of file [parallel.h](#).

3.104.2.8 mkSlaveInfile

`int ParallelVars::mkSlaveInfile`

Definition at line 178 of file [parallel.h](#).

3.104.2.9 exprbufsize

`int ParallelVars::exprbufsize`

Definition at line 179 of file [parallel.h](#).

3.104.2.10 `exprtodo`

```
int ParallelVars::exprtodo
```

Definition at line 180 of file [parallel.h](#).

3.104.2.11 `log`

```
int ParallelVars::log
```

Definition at line 181 of file [parallel.h](#).

3.104.2.12 `numsbufs`

```
WORD ParallelVars::numsbufs
```

Definition at line 182 of file [parallel.h](#).

3.104.2.13 `numrbufs`

```
WORD ParallelVars::numrbufs
```

Definition at line 183 of file [parallel.h](#).

The documentation for this struct was generated from the following file:

- [parallel.h](#)

3.105 PaRtl Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [psize](#)
- WORD * [args](#)
- WORD * [nargs](#)
- WORD * [nfun](#)
- WORD [numargs](#)
- WORD [numpart](#)
- WORD [where](#)

3.105.1 Detailed Description

The struct PARTI is used to help determining whether a `partition_` function can be replaced.

Definition at line 1096 of file [structs.h](#).

3.105.2 Field Documentation

3.105.2.1 psize

WORD* PaRtI::psize

Definition at line 1097 of file [structs.h](#).

3.105.2.2 args

WORD* PaRtI::args

Definition at line 1098 of file [structs.h](#).

3.105.2.3 nargs

WORD* PaRtI::nargs

Definition at line 1099 of file [structs.h](#).

3.105.2.4 nfun

WORD* PaRtI::nfun

Definition at line 1100 of file [structs.h](#).

3.105.2.5 numargs

WORD PaRtI::numargs

Definition at line 1101 of file [structs.h](#).

3.105.2.6 numpart

WORD PaRtI::numpart

Definition at line 1102 of file [structs.h](#).

3.105.2.7 where

WORD PaRtI::where


Definition at line 1103 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.106 Particle Class Reference

Collaboration diagram for Particle:

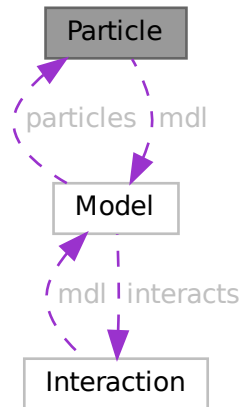

Public Member Functions

- [Particle](#) ([Model](#) *mdl, int pid, [PInput](#) *pinp)
- char * [particleName](#) (int p)
- int [particleCode](#) (int p)
- char * [interactionName](#) (int p)
- char * [aparticle](#) (void)
- void [prParticle](#) (void)
- int [isNeutral](#) (void)
- const char * [typeName](#) (void)
- const char * [typeGName](#) (void)

Data Fields

- [Model](#) * mdl
- char * [name](#)
- char * [aname](#)
- int [id](#)
- int [ptype](#)
- int [neutral](#)
- int [pcode](#)
- int [acode](#)
- int [cmindeg](#)
- int [cmaxdeg](#)
- int [extonly](#)

3.106.1 Detailed Description

Definition at line 227 of file [grcc.h](#).

3.106.2 Constructor & Destructor Documentation

3.106.2.1 Particle()

```
Particle::Particle (
    Model * modl,
    int pid,
    PInput * pinp )
```

Definition at line 1671 of file [grcc.cc](#).

3.106.2.2 ~Particle()

```
Particle::~~Particle (
    void )
```

Definition at line 1748 of file [grcc.cc](#).

3.106.3 Member Function Documentation

3.106.3.1 particleName()

```
char * Particle::particleName (
    int p )
```

Definition at line 1755 of file [grcc.cc](#).

3.106.3.2 particleCode()

```
int Particle::particleCode (
    int p )
```

Definition at line 1765 of file [grcc.cc](#).

3.106.3.3 aparticle()

```
char * Particle::aparticle (
    void )
```

Definition at line 1793 of file [grcc.cc](#).

3.106.3.4 prParticle()

```
void Particle::prParticle (  
    void )
```

Definition at line 1805 of file [grcc.cc](#).

3.106.3.5 isNeutral()

```
int Particle::isNeutral (  
    void )
```

Definition at line 1775 of file [grcc.cc](#).

3.106.3.6 typeName()

```
const char * Particle::typeName (  
    void )
```

Definition at line 1781 of file [grcc.cc](#).

3.106.3.7 typeGName()

```
const char * Particle::typeGName (  
    void )
```

Definition at line 1787 of file [grcc.cc](#).

3.106.4 Field Documentation

3.106.4.1 mdl

```
Model* Particle::mdl
```

Definition at line 229 of file [grcc.h](#).

3.106.4.2 name

```
char* Particle::name
```

Definition at line 230 of file [grcc.h](#).

3.106.4.3 aname

```
char* Particle::aname
```

Definition at line 231 of file [grcc.h](#).

3.106.4.4 id

```
int Particle::id
```

Definition at line 232 of file [grcc.h](#).

3.106.4.5 ptype

```
int Particle::ptype
```

Definition at line 233 of file [grcc.h](#).

3.106.4.6 neutral

```
int Particle::neutral
```

Definition at line 234 of file [grcc.h](#).

3.106.4.7 pcode

```
int Particle::pcode
```

Definition at line 235 of file [grcc.h](#).

3.106.4.8 acode

```
int Particle::acode
```

Definition at line 236 of file [grcc.h](#).

3.106.4.9 cmindeg

```
int Particle::cmindeg
```

Definition at line 237 of file [grcc.h](#).

3.106.4.10 cmaxdeg

```
int Particle::cmaxdeg
```

Definition at line 238 of file [grcc.h](#).

3.106.4.11 extonly

```
int Particle::extonly
```

Definition at line 240 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.107 PaRtlcLe Struct Reference

Data Fields

- WORD [number](#)
- WORD [spin](#)
- WORD [mass](#)
- WORD [type](#)

3.107.1 Detailed Description

Definition at line 619 of file [structs.h](#).

3.107.2 Field Documentation

3.107.2.1 number

```
WORD PaRtlcLe::number
```

Definition at line 620 of file [structs.h](#).

3.107.2.2 spin

```
WORD PaRtlcLe::spin
```

Definition at line 621 of file [structs.h](#).

3.107.2.3 mass

```
WORD PaRtlcLe::mass
```

Definition at line 622 of file [structs.h](#).

3.107.2.4 type

WORD PaRtIcLe::type

Definition at line 623 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.108 PeRmUtE Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [objects](#)
- WORD [sign](#)
- WORD [n](#)
- WORD [cycle](#) [MAXMATCH]

3.108.1 Detailed Description

The struct PERM is used to generate all permutations when the pattern matcher has to try to match (anti)symmetric functions.

Definition at line 1057 of file [structs.h](#).

3.108.2 Field Documentation

3.108.2.1 objects

WORD* PeRmUtE::objects

Definition at line 1058 of file [structs.h](#).

3.108.2.2 sign

WORD PeRmUtE::sign

Definition at line 1059 of file [structs.h](#).

3.108.2.3 n

WORD PeRmUtE::n

Definition at line 1060 of file [structs.h](#).

3.108.2.4 cycle

WORD PeRmUtE::cycle[MAXMATCH]

Definition at line 1061 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.109 PeRmUtEp Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD ** [objects](#)
- WORD [sign](#)
- WORD [n](#)
- WORD [cycle](#) [MAXMATCH]

3.109.1 Detailed Description

Like struct PERM but works with pointers.

Definition at line 1068 of file [structs.h](#).

3.109.2 Field Documentation

3.109.2.1 objects

WORD** PeRmUtEp::objects

Definition at line 1069 of file [structs.h](#).

3.109.2.2 sign

WORD PeRmUtEp::sign

Definition at line 1070 of file [structs.h](#).

3.109.2.3 n

WORD PeRmUtEp::n

Definition at line 1071 of file [structs.h](#).

3.109.2.4 cycle

```
WORD PeRmUtEp::cycle[MAXMATCH]
```

Definition at line 1072 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.110 PF_BUFFER Struct Reference

```
#include <parallel.h>
```

Data Fields

- WORD ** [buff](#)
- WORD ** [fill](#)
- WORD ** [full](#)
- WORD ** [stop](#)
- MPI_Status * [status](#)
- MPI_Status * [retstat](#)
- MPI_Request * [request](#)
- MPI_Datatype * [type](#)
- int * [index](#)
- int * [tag](#)
- int * [from](#)
- int [numbufs](#)
- int [active](#)

3.110.1 Detailed Description

A struct for nonblocking, unbuffered send of the sorted terms in the PObuffers back to the master using several "rotating" PObuffers.

Definition at line 147 of file [parallel.h](#).

3.110.2 Field Documentation

3.110.2.1 buff

```
WORD** PF_BUFFER::buff
```

Definition at line 148 of file [parallel.h](#).

3.110.2.2 fill

```
WORD** PF_BUFFER::fill
```

Definition at line 149 of file [parallel.h](#).

3.110.2.3 full

```
WORD** PF_BUFFER::full
```

Definition at line 150 of file [parallel.h](#).

3.110.2.4 stop

```
WORD** PF_BUFFER::stop
```

Definition at line 151 of file [parallel.h](#).

3.110.2.5 status

```
MPI_Status* PF_BUFFER::status
```

Definition at line 152 of file [parallel.h](#).

3.110.2.6 retstat

```
MPI_Status* PF_BUFFER::retstat
```

Definition at line 153 of file [parallel.h](#).

3.110.2.7 request

```
MPI_Request* PF_BUFFER::request
```

Definition at line 154 of file [parallel.h](#).

3.110.2.8 type

```
MPI_Datatype* PF_BUFFER::type
```

Definition at line 155 of file [parallel.h](#).

3.110.2.9 index

```
int* PF_BUFFER::index
```

Definition at line 156 of file [parallel.h](#).

3.110.2.10 tag

```
int* PF_BUFFER::tag
```

Definition at line 157 of file [parallel.h](#).

3.110.2.11 from

```
int* PF_BUFFER::from
```

Definition at line 158 of file [parallel.h](#).

3.110.2.12 numbufs

```
int PF_BUFFER::numbufs
```

Definition at line 159 of file [parallel.h](#).

3.110.2.13 active

```
int PF_BUFFER::active
```

Definition at line 160 of file [parallel.h](#).

The documentation for this struct was generated from the following file:

- [parallel.h](#)

3.111 PGInput Struct Reference

Data Fields

- int [cdeg](#)
- int [ctyp](#)
- int [cnum](#)
- int [cple](#)
- const char * [pname](#)
- long [pcode](#)

3.111.1 Detailed Description

Definition at line 232 of file [grccparam.h](#).

3.111.2 Field Documentation

3.111.2.1 cdeg

```
int PGInput::cdeg
```

Definition at line 233 of file [grccparam.h](#).

3.111.2.2 ctyp

```
int PGInput::ctyp
```

Definition at line 234 of file [grccparam.h](#).

3.111.2.3 cnum

```
int PGInput::cnum
```

Definition at line 235 of file [grccparam.h](#).

3.111.2.4 cple

```
int PGInput::cple
```

Definition at line 236 of file [grccparam.h](#).

3.111.2.5 pname

```
const char* PGInput::pname
```

Definition at line 238 of file [grccparam.h](#).

3.111.2.6 pcode

```
long PGInput::pcode
```

Definition at line 240 of file [grccparam.h](#).

The documentation for this struct was generated from the following file:

- [grccparam.h](#)

3.112 PInput Struct Reference

Data Fields

- const char * [name](#)
- const char * [aname](#)
- int [pcode](#)
- int [acode](#)
- const char * [ptypen](#)
- int [ptypec](#)
- int [extonly](#)

3.112.1 Detailed Description

Definition at line [183](#) of file [grccparam.h](#).

3.112.2 Field Documentation

3.112.2.1 name

```
const char* PInput::name
```

Definition at line [184](#) of file [grccparam.h](#).

3.112.2.2 aname

```
const char* PInput::aname
```

Definition at line [185](#) of file [grccparam.h](#).

3.112.2.3 pcode

```
int PInput::pcode
```

Definition at line [186](#) of file [grccparam.h](#).

3.112.2.4 acode

```
int PInput::acode
```

Definition at line [187](#) of file [grccparam.h](#).

3.112.2.5 ptypen

```
const char* PInput::ptypen
```

Definition at line [188](#) of file [grccparam.h](#).


```
int PInput::ptypec
```

3.112.2.7 extonly

Definition at line 190 of file grccparam.h.

- grccparam.h

Collaboration diagram for PNodeClass:

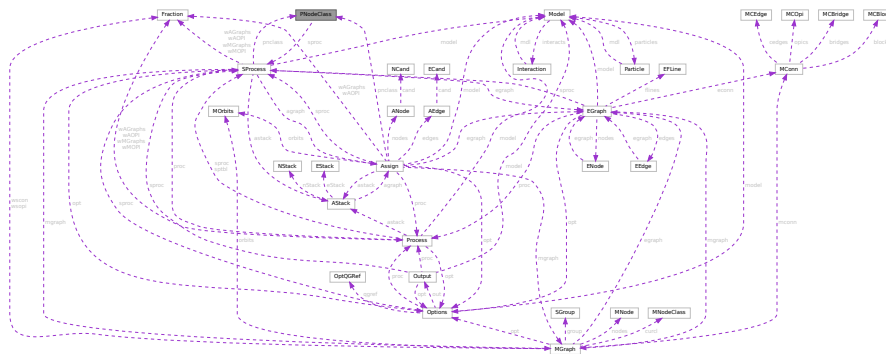

- `PNodeClass (SProcess *sprc, int nnods, int nclss, NCInput *cls)`
- `PNodeClass (SProcess *sprc, int nnods, int nclss, int *dgs, int *typ, int *ptcl, int *cpl, int *cnt, int *cmind, int *cmaxd)`
- `void prPNodeClass (void)`
- `void prElem (int e)`

- SProcess * sproc
- int * deg
- int * type
- int * particle
- int * couple
- int * cmindeg
- int * cmaxdeg
- int * count
- int * cl2nd
- int * nd2cl
- int * cl2mcl
- int nnodes
- int nclass

3.113.1 Detailed Description

Definition at line 348 of file [grcc.h](#).

3.113.2 Constructor & Destructor Documentation

3.113.2.1 PNodeClass() [1/2]

```
PNodeClass::PNodeClass (
    SProcess * sprc,
    int nnods,
    int nclss,
    NCInput * cls )
```

Definition at line 2626 of file [grcc.cc](#).

3.113.2.2 PNodeClass() [2/2]

```
PNodeClass::PNodeClass (
    SProcess * sprc,
    int nnods,
    int nclss,
    int * dgs,
    int * typ,
    int * ptcl,
    int * cpl,
    int * cnt,
    int * cmind,
    int * cmaxd )
```

Definition at line 2700 of file [grcc.cc](#).

3.113.2.3 ~PNodeClass()

```
PNodeClass::~PNodeClass (
    void )
```

Definition at line 2778 of file [grcc.cc](#).

3.113.3 Member Function Documentation

3.113.3.1 prPNodeClass()

```
void PNodeClass::prPNodeClass (
    void )
```

Definition at line 2793 of file [grcc.cc](#).

3.113.3.2 prElem()

```
void PNodeClass::prElem (
    int e )
```

Definition at line 2805 of file [grcc.cc](#).

3.113.4 Field Documentation

3.113.4.1 sproc

```
SProcess* PNodeClass::sproc
```

Definition at line 350 of file [grcc.h](#).

3.113.4.2 deg

```
int* PNodeClass::deg
```

Definition at line 351 of file [grcc.h](#).

3.113.4.3 type

```
int* PNodeClass::type
```

Definition at line 352 of file [grcc.h](#).

3.113.4.4 particle

```
int* PNodeClass::particle
```

Definition at line 353 of file [grcc.h](#).

3.113.4.5 couple

```
int* PNodeClass::couple
```

Definition at line 354 of file [grcc.h](#).

3.113.4.6 cmindeg

```
int* PNodeClass::cmindeg
```

Definition at line 355 of file [grcc.h](#).

3.113.4.7 cmaxdeg

```
int* PNodeClass::cmaxdeg
```

Definition at line 356 of file [grcc.h](#).

3.113.4.8 count

```
int* PNodeClass::count
```

Definition at line 357 of file [grcc.h](#).

3.113.4.9 cl2nd

```
int* PNodeClass::cl2nd
```

Definition at line 358 of file [grcc.h](#).

3.113.4.10 nd2cl

```
int* PNodeClass::nd2cl
```

Definition at line 359 of file [grcc.h](#).

3.113.4.11 cl2mcl

```
int* PNodeClass::cl2mcl
```

Definition at line 360 of file [grcc.h](#).

3.113.4.12 nnodes

```
int PNodeClass::nnodes
```

Definition at line 361 of file [grcc.h](#).

3.113.4.13 nclass

```
int PNodeClass::nclass
```

Definition at line 362 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.114 flint::poly Class Reference

Public Member Functions

- void [print](#) (const string &text)

Data Fields

- [fmpz_poly_t](#) [d](#)

3.114.1 Detailed Description

Definition at line [87](#) of file [flintinterface.h](#).

3.114.2 Constructor & Destructor Documentation

3.114.2.1 [poly\(\)](#)

```
flint::poly::poly ( ) [inline]
```

Definition at line [90](#) of file [flintinterface.h](#).

3.114.2.2 [~poly\(\)](#)

```
flint::poly::~~poly ( ) [inline]
```

Definition at line [91](#) of file [flintinterface.h](#).

3.114.3 Member Function Documentation

3.114.3.1 [print\(\)](#)

```
void flint::poly::print (
    const string & text ) [inline]
```

Definition at line [92](#) of file [flintinterface.h](#).

3.114.4 Field Documentation

3.114.4.1 [d](#)

```
fmpz_poly_t flint::poly::d
```

Definition at line [89](#) of file [flintinterface.h](#).

The documentation for this class was generated from the following file:

- [flintinterface.h](#)

3.115 poly Class Reference

Public Member Functions

- [poly](#) (PHEAD int, WORD=-1, WORD=1)
- [poly](#) (PHEAD const UWORD *, WORD, WORD=-1, WORD=1)
- [poly](#) (const [poly](#) &, WORD=-1, WORD=1)
- [poly](#) & [operator+=](#) (const [poly](#) &)
- [poly](#) & [operator-=](#) (const [poly](#) &)
- [poly](#) & [operator*=](#) (const [poly](#) &)
- [poly](#) & [operator/=](#) (const [poly](#) &)
- [poly](#) & [operator%=>](#) (const [poly](#) &)
- const [poly](#) [operator+](#) (const [poly](#) &) const
- const [poly](#) [operator-](#) (const [poly](#) &) const
- const [poly](#) [operator*](#) (const [poly](#) &) const
- const [poly](#) [operator/](#) (const [poly](#) &) const
- const [poly](#) [operator%](#) (const [poly](#) &) const
- bool [operator==](#) (const [poly](#) &) const
- bool [operator!=](#) (const [poly](#) &) const
- [poly](#) & [operator=](#) (const [poly](#) &)
- WORD & [operator\[\]](#) (int)
- const WORD & [operator\[\]](#) (int) const
- void [termscopy](#) (const WORD *, int, int)
- void [check_memory](#) (int)
- void [expand_memory](#) (int)
- bool [is_zero](#) () const
- bool [is_one](#) () const
- bool [is_integer](#) () const
- bool [is_monomial](#) () const
- int [is_dense_univariate](#) () const
- int [sign](#) () const
- int [degree](#) (int) const
- int [total_degree](#) () const
- int [first_variable](#) () const
- int [number_of_terms](#) () const
- const std::vector< int > [all_variables](#) () const
- const [poly](#) [integer_lcoeff](#) () const
- const [poly](#) [lcoeff_univar](#) (int) const
- const [poly](#) [lcoeff_multivar](#) (int) const
- const [poly](#) [coefficient](#) (int, int) const
- const [poly](#) [derivative](#) (int) const
- void [setmod](#) (WORD, WORD=1)
- void [coefficients_modulo](#) (UWORD *, WORD, bool)
- int [size_of_form_notation](#) () const
- int [size_of_form_notation_with_den](#) (WORD) const
- const [poly](#) & [normalize](#) ()
- const std::string [to_string](#) () const
- WORD [last_monomial_index](#) () const
- WORD * [last_monomial](#) () const
- int [compare_degree_vector](#) (const [poly](#) &) const
- std::vector< int > [degree_vector](#) () const
- int [compare_degree_vector](#) (const std::vector< int > &) const

Static Public Member Functions

- static const [poly simple_poly](#) (PHEAD int, int=0, int=1, int=0, int=1)
- static const [poly simple_poly](#) (PHEAD int, const [poly](#) &, int=1, int=0, int=1)
- static void [get_variables](#) (PHEAD const std::vector< WORD * > &, bool, bool)
- static const [poly argument_to_poly](#) (PHEAD WORD *, bool, bool, [poly](#) *den=NULL)
- static void [poly_to_argument](#) (const [poly](#) &, WORD *, bool)
- static void [poly_to_argument_with_den](#) (const [poly](#) &, WORD, const UWORD *, WORD *, bool)
- static const [poly from_coefficient_list](#) (PHEAD const std::vector< WORD > &, int, WORD)
- static const std::vector< WORD > [to_coefficient_list](#) (const [poly](#) &)
- static const std::vector< WORD > [coefficient_list_divmod](#) (const std::vector< WORD > &, const std::vector< WORD > &, WORD, int)
- static int [monomial_compare](#) (PHEAD const WORD *, const WORD *)
- static void [add](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [sub](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [mul](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [div](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [mod](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [divmod](#) (const [poly](#) &, const [poly](#) &, [poly](#) &, [poly](#) &, bool only_divides)
- static bool [divides](#) (const [poly](#) &, const [poly](#) &)
- static void [mul_one_term](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [mul_univar](#) (const [poly](#) &, const [poly](#) &, [poly](#) &, int)
- static void [mul_heap](#) (const [poly](#) &, const [poly](#) &, [poly](#) &)
- static void [divmod_one_term](#) (const [poly](#) &, const [poly](#) &, [poly](#) &, [poly](#) &, bool)
- static void [divmod_univar](#) (const [poly](#) &, const [poly](#) &, [poly](#) &, [poly](#) &, int, bool)
- static void [divmod_heap](#) (const [poly](#) &, const [poly](#) &, [poly](#) &, [poly](#) &, bool, bool, bool &)
- static void [push_heap](#) (PHEAD WORD **, int)
- static void [pop_heap](#) (PHEAD WORD **, int)

Data Fields

- WORD * [terms](#)
- LONG [size_of_terms](#)
- WORD [modp](#)
- WORD [modn](#)

3.115.1 Detailed Description

Definition at line 53 of file [poly.h](#).

3.115.2 Constructor & Destructor Documentation

3.115.2.1 [poly\(\)](#) [1/3]

```
poly::poly (
    PHEAD int a,
    WORD modp = -1,
    WORD modn = 1 )
```

Definition at line 54 of file [poly.cc](#).

3.115.2.2 poly() [2/3]

```
poly::poly (
    PHEAD const UWORD * a,
    WORD na,
    WORD modp = -1,
    WORD modn = 1 )
```

Definition at line 83 of file [poly.cc](#).

3.115.2.3 poly() [3/3]

```
poly::poly (
    const poly & a,
    WORD modp = -1,
    WORD modn = 1 )
```

Definition at line 111 of file [poly.cc](#).

3.115.2.4 ~poly()

```
poly::~~poly ( )
```

Definition at line 133 of file [poly.cc](#).

3.115.3 Member Function Documentation

3.115.3.1 operator+=()

```
poly & poly::operator+= (
    const poly & a )
```

Definition at line 1966 of file [poly.cc](#).

3.115.3.2 operator-=()

```
poly & poly::operator-= (
    const poly & a )
```

Definition at line 1967 of file [poly.cc](#).

3.115.3.3 operator*=()

```
poly & poly::operator*= (
    const poly & a )
```

Definition at line 1968 of file [poly.cc](#).

3.115.3.4 operator/=()

```
poly & poly::operator/= (
    const poly & a )
```

Definition at line 1969 of file [poly.cc](#).

3.115.3.5 operator%=()

```
poly & poly::operator%= (
    const poly & a )
```

Definition at line 1970 of file [poly.cc](#).

3.115.3.6 operator+()

```
const poly poly::operator+ (
    const poly & a ) const
```

Definition at line 1959 of file [poly.cc](#).

3.115.3.7 operator-()

```
const poly poly::operator- (
    const poly & a ) const
```

Definition at line 1960 of file [poly.cc](#).

3.115.3.8 operator*()

```
const poly poly::operator* (
    const poly & a ) const
```

Definition at line 1961 of file [poly.cc](#).

3.115.3.9 operator/()

```
const poly poly::operator/ (
    const poly & a ) const
```

Definition at line 1962 of file [poly.cc](#).

3.115.3.10 operator%()

```
const poly poly::operator% (
    const poly & a ) const
```

Definition at line 1963 of file [poly.cc](#).

3.115.3.11 operator==()

```
bool poly::operator== (
    const poly & a ) const
```

Definition at line 1973 of file [poly.cc](#).

3.115.3.12 operator!=()

```
bool poly::operator!= (
    const poly & a ) const
```

Definition at line 1979 of file [poly.cc](#).

3.115.3.13 operator=()

```
poly & poly::operator= (
    const poly & a )
```

Definition at line 1939 of file [poly.cc](#).

3.115.3.14 operator[]() [1/2]

```
WORD & poly::operator[] (
    int i ) [inline]
```

Definition at line 247 of file [poly.h](#).

3.115.3.15 operator[]() [2/2]

```
const WORD & poly::operator[] (
    int i ) const [inline]
```

Definition at line 251 of file [poly.h](#).

3.115.3.16 termscopy()

```
void poly::termscopy (
    const WORD * source,
    int dest,
    int num ) [inline]
```

Definition at line 258 of file [poly.h](#).

3.115.3.17 check_memory()

```
void poly::check_memory (
    int i ) [inline]
```

Definition at line 240 of file [poly.h](#).

3.115.3.18 expand_memory()

```
void poly::expand_memory (
    int i )
```

Definition at line 149 of file [poly.cc](#).

3.115.3.19 is_zero()

```
bool poly::is_zero ( ) const
```

Definition at line 2209 of file [poly.cc](#).

3.115.3.20 is_one()

```
bool poly::is_one ( ) const
```

Definition at line 2219 of file [poly.cc](#).

3.115.3.21 is_integer()

```
bool poly::is_integer ( ) const
```

Definition at line 2239 of file [poly.cc](#).

3.115.3.22 is_monomial()

```
bool poly::is_monomial ( ) const
```

Definition at line 2259 of file [poly.cc](#).

3.115.3.23 is_dense_univariate()

```
int poly::is_dense_univariate ( ) const
```

Dense univariate detection

3.115.4 Description

This method returns whether the polynomial is dense and univariate. The possible return values are:

-2 is not dense univariate -1 is no variables $n \geq 0$ is univariate in n

3.115.5 Notes

A univariate polynomial is considered dense iff more than half of the coefficients `a_0...a_deg` are non-zero.

Definition at line 2284 of file [poly.cc](#).

Referenced by [divmod\(\)](#), and [mul\(\)](#).

3.115.5.1 `sign()`

```
int poly::sign ( ) const
```

Definition at line 2039 of file [poly.cc](#).

3.115.5.2 `degree()`

```
int poly::degree (
    int x ) const
```

Definition at line 2050 of file [poly.cc](#).

3.115.5.3 `total_degree()`

```
int poly::total_degree ( ) const
```

Definition at line 2063 of file [poly.cc](#).

3.115.5.4 `first_variable()`

```
int poly::first_variable ( ) const
```

Definition at line 2000 of file [poly.cc](#).

3.115.5.5 `number_of_terms()`

```
int poly::number_of_terms ( ) const
```

Definition at line 1986 of file [poly.cc](#).

3.115.5.6 `all_variables()`

```
const vector< int > poly::all_variables ( ) const
```

Definition at line 2016 of file [poly.cc](#).

3.115.5.7 integer_lcoeff()

```
const poly poly::integer_lcoeff ( ) const
```

Definition at line 2083 of file [poly.cc](#).

3.115.5.8 lcoeff_univar()

```
const poly poly::lcoeff_univar (
    int x ) const
```

Definition at line 2133 of file [poly.cc](#).

3.115.5.9 lcoeff_multivar()

```
const poly poly::lcoeff_multivar (
    int x ) const
```

Definition at line 2140 of file [poly.cc](#).

3.115.5.10 coefficient()

```
const poly poly::coefficient (
    int x,
    int n ) const
```

Definition at line 2105 of file [poly.cc](#).

3.115.5.11 derivative()

```
const poly poly::derivative (
    int x ) const
```

Definition at line 2172 of file [poly.cc](#).

3.115.5.12 setmod()

```
void poly::setmod (
    WORD _modp,
    WORD _modn = 1 )
```

Definition at line 179 of file [poly.cc](#).

3.115.5.13 coefficients_modulo()

```
void poly::coefficients_modulo (
    UWORD * a,
    WORD na,
    bool small )
```

Definition at line 215 of file [poly.cc](#).

3.115.5.14 simple_poly() [1/2]

```
const poly poly::simple_poly (
    PHEAD int x,
    int a = 0,
    int b = 1,
    int p = 0,
    int n = 1 ) [static]
```

Definition at line 2317 of file [poly.cc](#).

3.115.5.15 simple_poly() [2/2]

```
const poly poly::simple_poly (
    PHEAD int x,
    const poly & a,
    int b = 1,
    int p = 0,
    int n = 1 ) [static]
```

Definition at line 2356 of file [poly.cc](#).

3.115.5.16 get_variables()

```
void poly::get_variables (
    PHEAD const std::vector< WORD * > & ,
    bool ,
    bool ) [static]
```

Definition at line 2395 of file [poly.cc](#).

3.115.5.17 argument_to_poly()

```
const poly poly::argument_to_poly (
    PHEAD WORD * e,
    bool with_arghead,
    bool sort_univar,
    poly * den = NULL ) [static]
```

Definition at line 2498 of file [poly.cc](#).

3.115.5.18 poly_to_argument()

```
void poly::poly_to_argument (
    const poly & a,
    WORD * res,
    bool with_arghead ) [static]
```

Definition at line 2611 of file [poly.cc](#).

3.115.5.19 poly_to_argument_with_den()

```
void poly::poly_to_argument_with_den (
    const poly & a,
    WORD nden,
    const UWORD * den,
    WORD * res,
    bool with_arghead ) [static]
```

Definition at line 2683 of file [poly.cc](#).

3.115.5.20 size_of_form_notation()

```
int poly::size_of_form_notation ( ) const
```

Definition at line 2766 of file [poly.cc](#).

3.115.5.21 size_of_form_notation_with_den()

```
int poly::size_of_form_notation_with_den (
    WORD nden ) const
```

Definition at line 2795 of file [poly.cc](#).

3.115.5.22 normalize()

```
const poly & poly::normalize ( )
```

Definition at line 362 of file [poly.cc](#).

3.115.5.23 from_coefficient_list()

```
const poly poly::from_coefficient_list (
    PHEAD const std::vector< WORD > & ,
    int ,
    WORD ) [static]
```

Definition at line 2885 of file [poly.cc](#).

3.115.5.24 to_coefficient_list()

```
const vector< WORD > poly::to_coefficient_list (
    const poly & a ) [static]
```

Definition at line 2823 of file [poly.cc](#).

3.115.5.25 coefficient_list_divmod()

```
const vector< WORD > poly::coefficient_list_divmod (
    const std::vector< WORD > & ,
    const std::vector< WORD > & ,
    WORD ,
    int ) [static]
```

Definition at line 2846 of file [poly.cc](#).

3.115.5.26 to_string()

```
const string poly::to_string ( ) const
```

Definition at line 267 of file [poly.cc](#).

3.115.5.27 monomial_compare()

```
int poly::monomial_compare (
    PHEAD const WORD * a,
    const WORD * b ) [static]
```

Definition at line 350 of file [poly.cc](#).

3.115.5.28 last_monomial_index()

```
WORD poly::last_monomial_index ( ) const
```

Definition at line 465 of file [poly.cc](#).

3.115.5.29 last_monomial()

```
WORD * poly::last_monomial ( ) const
```

Definition at line 472 of file [poly.cc](#).

3.115.5.30 compare_degree_vector()

```
int poly::compare_degree_vector (
    const poly & b ) const
```

Definition at line 481 of file [poly.cc](#).

3.115.5.31 degree_vector()

```
std::vector< int > poly::degree_vector ( ) const
```

Definition at line 503 of file [poly.cc](#).

3.115.5.32 add()

```
void poly::add (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Definition at line 538 of file [poly.cc](#).

3.115.5.33 sub()

```
void poly::sub (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Definition at line 622 of file [poly.cc](#).

3.115.5.34 mul()

```
void poly::mul (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Polynomial multiplication

3.115.6 Description


This routine determines which multiplication routine to use for multiplying two polynomials. The logic is as follows:

- If a or b consists of only one term, call `mul_one_term`;
- Otherwise, if both are univariate and dense, call `mul_univar`;
- Otherwise, call `mul_heap`.

Definition at line 1195 of file [poly.cc](#).

References [is_dense_univariate\(\)](#), and [mul_heap\(\)](#).

Here is the call graph for this function:



3.115.6.1 div()

```
void poly::div (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Definition at line 1915 of file [poly.cc](#).

3.115.6.2 mod()

```
void poly::mod (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Definition at line 1927 of file [poly.cc](#).

3.115.6.3 divmod()

```
void poly::divmod (
    const poly & a,
    const poly & b,
    poly & q,
    poly & r,
    bool only_divides ) [static]
```

Polynomial division

3.115.7 Description


This routine determines which division routine to use for dividing two polynomials. The logic is as follows:

- If b consists of only one term, call `divmod_one_term`;
- Otherwise, if both are univariate and dense, call `divmod_univar`;
- Otherwise, call `divmod_heap`.

Definition at line 1856 of file [poly.cc](#).

References [divmod_heap\(\)](#), [divmod_univar\(\)](#), and [is_dense_univariate\(\)](#).

Here is the call graph for this function:

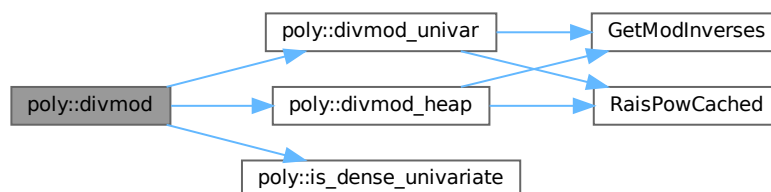

3.115.7.1 divides()

```
bool poly::divides (
    const poly & a,
    const poly & b ) [static]
```

Definition at line 1902 of file [poly.cc](#).

3.115.7.2 mul_one_term()

```
void poly::mul_one_term (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Definition at line 755 of file [poly.cc](#).

3.115.7.3 mul_univar()

```
void poly::mul_univar (
    const poly & a,
    const poly & b,
    poly & c,
    int var ) [static]
```

Definition at line 829 of file [poly.cc](#).

3.115.7.4 mul_heap()

```
void poly::mul_heap (
    const poly & a,
    const poly & b,
    poly & c ) [static]
```

Multiplication of polynomials with a heap

3.115.8 Description

Multiplies two multivariate polynomials. The next element of the product is efficiently determined by using a heap. If the product of the maximum power in all variables is small, a hash table is used to add equal terms for extra speed.

A heap element h is formatted as follows:

- h[0] = index in a
- h[1] = index in b
- h[2] = hash code (-1 if no hash is used)
- h[3] = length of coefficient with sign
- h[4...4+AN.poly_num_vars-1] = powers

- $h[4+AN.poly_num_vars...4+h[3]-1]$ = coefficient

Definition at line 961 of file [poly.cc](#).

References [RaisPowCached\(\)](#).

Referenced by [mul\(\)](#).

Here is the call graph for this function:



3.115.8.1 divmod_one_term()

```

void poly::divmod_one_term (
    const poly & a,
    const poly & b,
    poly & q,
    poly & r,
    bool only_divides ) [static]
  
```

Definition at line 1245 of file [poly.cc](#).

3.115.8.2 divmod_univar()

```

void poly::divmod_univar (
    const poly & a,
    const poly & b,
    poly & q,
    poly & r,
    int var,
    bool only_divides ) [static]
  
```

Division of dense univariate polynomials.

3.115.9 Description

Divides two dense univariate polynomials. For each power, the method collects all terms that result in that power.


Relevant formula $[Q=A/B, P=\text{SUM}(p_i \cdot x^i), n=\text{deg}(A), m=\text{deg}(B)]: q_k = [a_{m+k} - \text{SUM}(i=k+1 \dots n-m, b_{m+k-i} \cdot q_i)] / b_m$

Definition at line 1376 of file [poly.cc](#).

References [GetModInverses\(\)](#), and [RaisPowCached\(\)](#).

Referenced by [divmod\(\)](#).

Here is the call graph for this function:

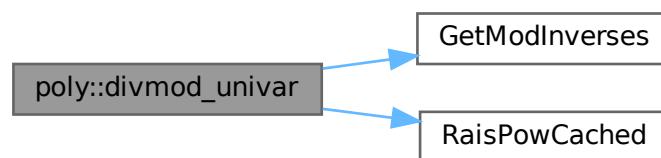

3.115.9.1 divmod_heap()

```

void poly::divmod_heap (
    const poly & a,
    const poly & b,
    poly & q,
    poly & r,
    bool only_divides,
    bool check_div,
    bool & div_fail ) [static]
  
```

Division of polynomials with a heap

3.115.10 Description

Divides two multivariate polynomials. The next element of the quotient/remainder is efficiently determined by using a heap. If the product of the maximum power in all variables is small, a hash table is used to add equal terms for extra speed.

If the input flag `check_div` is set then if the result of any coefficient division results in a non-zero remainder (indicating that division has failed over the integers) the output flag `div_fail` will be set and the division will be terminated early (`q`, `r` will be incorrect). If `check_div` is not set then non-zero remainders from coefficient division will be written into `r`.

A heap element `h` is formatted as follows:

- $h[0]$ = index in a
- $h[1]$ = index in b
- $h[2] = -1$ (no hash is used)
- $h[3]$ = length of coefficient with sign
- $h[4 \dots 4 + \text{AN.poly_num_vars} - 1]$ = powers
- $h[4 + \text{AN.poly_num_vars} \dots 4 + h[3] - 1]$ = coefficient

Note: the hashing trick as in multiplication cannot be used easily, since there is no tight upperbound on the exponents in the answer.


For details, see M. Monagan, "Polynomial Division using Dynamic Array, Heaps, and Packed Exponent Vectors"

Definition at line 1579 of file [poly.cc](#).

References [GetModInverses\(\)](#), and [RaisPowCached\(\)](#).

Referenced by [divmod\(\)](#).

Here is the call graph for this function:

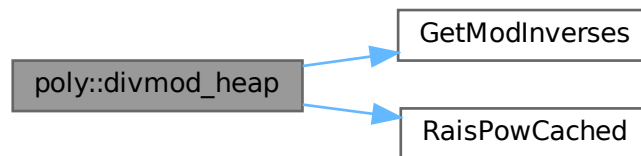

3.115.10.1 `push_heap()`

```
void poly::push_heap (
    PHEAD WORD ** heap,
    int n ) [static]
```

Definition at line 739 of file [poly.cc](#).

3.115.10.2 `pop_heap()`

```
void poly::pop_heap (
    PHEAD WORD ** heap,
    int n ) [static]
```

Definition at line 707 of file [poly.cc](#).

3.115.11 Field Documentation

3.115.11.1 terms

WORD* poly::terms

Definition at line 62 of file [poly.h](#).

3.115.11.2 size_of_terms

LONG poly::size_of_terms

Definition at line 63 of file [poly.h](#).

3.115.11.3 modp

WORD poly::modp

Definition at line 64 of file [poly.h](#).

3.115.11.4 modn

WORD poly::modn

Definition at line 64 of file [poly.h](#).

The documentation for this class was generated from the following files:

- [poly.h](#)
- [poly.cc](#)

3.116 flint::poly_factor Class Reference

Data Fields

- [fmpz_poly_factor_t](#) [d](#)

3.116.1 Detailed Description

Definition at line 96 of file [flintinterface.h](#).

3.116.2 Constructor & Destructor Documentation

3.116.2.1 `poly_factor()`

```
flint::poly_factor::poly_factor ( ) [inline]
```

Definition at line 99 of file [flintinterface.h](#).

3.116.2.2 `~poly_factor()`

```
flint::poly_factor::~~poly_factor ( ) [inline]
```

Definition at line 100 of file [flintinterface.h](#).

3.116.3 Field Documentation

3.116.3.1 `d`

```
mpz_poly_factor_t flint::poly_factor::d
```

Definition at line 98 of file [flintinterface.h](#).

The documentation for this class was generated from the following file:

- [flintinterface.h](#)

3.117 POLYMOD Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [coefs](#)
- WORD [numsym](#)
- WORD [arraysize](#)
- WORD [polysize](#)
- WORD [modnum](#)

3.117.1 Detailed Description

The [POLYMOD](#) struct controls one univariate polynomial of which the coefficients have been taken modulus a (prime) number that fits inside a variable of type WORD. The polynomial is stored as an array of coefficients of size WORD.

Definition at line 1236 of file [structs.h](#).

3.117.2 Field Documentation

3.117.2.1 coefs

WORD* POLYMOD::coefs

Definition at line 1237 of file [structs.h](#).

3.117.2.2 numsym

WORD POLYMOD::numsym

Definition at line 1238 of file [structs.h](#).

3.117.2.3 arraysize

WORD POLYMOD::arraysize

Definition at line 1239 of file [structs.h](#).

3.117.2.4 polysize

WORD POLYMOD::polysize

Definition at line 1240 of file [structs.h](#).

3.117.2.5 modnum

WORD POLYMOD::modnum

Definition at line 1241 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.118 PoSiTiOn Struct Reference

Data Fields

- [off_t p1](#)

3.118.1 Detailed Description

Definition at line 59 of file [structs.h](#).

3.118.2 Field Documentation

3.118.2.1 p1

```
off_t PoSiTiOn::p1
```

Definition at line 60 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.119 PRELOAD Struct Reference

```
#include <structs.h>
```

Data Fields

- `UBYTE *` [buffer](#)
- `LONG` [size](#)

3.119.1 Detailed Description

Used by the preprocessor to load the contents of a doloop or a procedure. The struct [PRELOAD](#) is used both in the [DOLOOP](#) and [PROCEDURE](#) structs.

Definition at line 854 of file [structs.h](#).

3.119.2 Field Documentation

3.119.2.1 buffer

```
UBYTE* PRELOAD::buffer
```

Definition at line 855 of file [structs.h](#).

3.119.2.2 size

```
LONG PRELOAD::size
```

Definition at line 856 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.120 pReVaR Struct Reference

```
#include <structs.h>
```

Data Fields

- UBYTE * [name](#)
- UBYTE * [value](#)
- UBYTE * [argnames](#)
- int [nargs](#)
- int [wildarg](#)

3.120.1 Detailed Description

An element of the type PREVAR is needed for each preprocessor variable.

Definition at line [824](#) of file [structs.h](#).

3.120.2 Field Documentation

3.120.2.1 name

```
UBYTE* pReVaR::name
```

allocated

Definition at line [825](#) of file [structs.h](#).

3.120.2.2 value

```
UBYTE* pReVaR::value
```

points into memory of name

Definition at line [826](#) of file [structs.h](#).

3.120.2.3 argnames

```
UBYTE* pReVaR::argnames
```

names of arguments, zero separated. points into memory of name

Definition at line [827](#) of file [structs.h](#).

3.120.2.4 nargs

```
int pReVaR::nargs
```

0 = regular, ≥ 1 : number of macro arguments. total number

Definition at line 828 of file [structs.h](#).

3.120.2.5 wildarg

```
int pReVaR::wildarg
```

The number of a potential ?var. If none: 0. wildarg<nargs

Definition at line 829 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.121 PROCEDURE Struct Reference

```
#include <structs.h>
```

Collaboration diagram for PROCEDURE:



Data Fields

- [PRELOAD](#) p
- UBYTE * [name](#)
- int [loadmode](#)
- int [mustfree](#)

Public Member Functions

- [Process](#) (int pid, [Model](#) *model, [Options](#) *opt, int nin, int *initlPart, int nfin, int *finalPart, int *coupling)
- **Process** (int pid, [Model](#) *model, [Options](#) *opt, [FGInput](#) *fgi)
- void [prProcess](#) (void)
- void [outProcP](#) (FILE *fp)
- void [prProcessP](#) (const char *fname)
- void [mkSProcess](#) (void)

Data Fields

- [Model](#) * [model](#)
- [Options](#) * [opt](#)
- [BigInt](#) [mgrcount](#)
- [BigInt](#) [agrcount](#)
- int * [initlPart](#)
- int * [finalPart](#)
- int [id](#)
- int [ninitl](#)
- int [nfinal](#)
- int [ctotal](#)
- int [nExtern](#)
- int [loop](#)
- int [maxnlegs](#)
- int [clist](#) [GRCC_MAXNCPLG]
- int [nSubproc](#)
- [SProcess](#) * [sptbl](#) [GRCC_MAXSUBPROCS]
- [SProcess](#) * [sproc](#)
- [AStack](#) * [astack](#)
- [BigInt](#) [ngraphs](#)
- [BigInt](#) [nopi](#)
- [BigInt](#) [wgraphs](#)
- [BigInt](#) [wopi](#)
- [BigInt](#) [nMGraphs](#)
- [BigInt](#) [nMOPI](#)
- [Fraction](#) [wMGraphs](#)
- [Fraction](#) [wMOPI](#)
- [BigInt](#) [nAGraphs](#)
- [BigInt](#) [nAOPI](#)
- [Fraction](#) [wAGraphs](#)
- [Fraction](#) [wAOPI](#)
- double [sec](#)

3.122.1 Detailed Description

Definition at line 447 of file [grcc.h](#).

3.122.2 Constructor & Destructor Documentation

3.122.2.1 Process()

```
Process::Process (
    int pid,
    Model * model,
    Options * opt,
    int nin,
    int * initlPart,
    int nfin,
    int * finalPart,
    int * coupling )
```

Definition at line 3338 of file [grcc.cc](#).

3.122.2.2 ~Process()

```
Process::~~Process (
    void )
```

Definition at line 3437 of file [grcc.cc](#).

3.122.3 Member Function Documentation

3.122.3.1 prProcess()

```
void Process::prProcess (
    void )
```

Definition at line 3448 of file [grcc.cc](#).

3.122.3.2 outProcP()

```
void Process::outProcP (
    FILE * fp )
```

Definition at line 3471 of file [grcc.cc](#).

3.122.3.3 prProcessP()

```
void Process::prProcessP (
    const char * fname )
```

Definition at line 3456 of file [grcc.cc](#).

3.122.3.4 mkSProcess()

```
void Process::mkSProcess (
    void )
```

Definition at line [3526](#) of file [grcc.cc](#).

3.122.4 Field Documentation

3.122.4.1 model

```
Model* Process::model
```

Definition at line [449](#) of file [grcc.h](#).

3.122.4.2 opt

```
Options* Process::opt
```

Definition at line [450](#) of file [grcc.h](#).

3.122.4.3 mgrcount

```
BigInt Process::mgrcount
```

Definition at line [451](#) of file [grcc.h](#).

3.122.4.4 agrcount

```
BigInt Process::agrcount
```

Definition at line [452](#) of file [grcc.h](#).

3.122.4.5 initlPart

```
int* Process::initlPart
```

Definition at line [453](#) of file [grcc.h](#).

3.122.4.6 finalPart

```
int* Process::finalPart
```

Definition at line [454](#) of file [grcc.h](#).

3.122.4.7 id

```
int Process::id
```

Definition at line 456 of file [grcc.h](#).

3.122.4.8 ninitl

```
int Process::ninitl
```

Definition at line 457 of file [grcc.h](#).

3.122.4.9 nfinal

```
int Process::nfinal
```

Definition at line 458 of file [grcc.h](#).

3.122.4.10 ctotat

```
int Process::ctotat
```

Definition at line 459 of file [grcc.h](#).

3.122.4.11 nExtern

```
int Process::nExtern
```

Definition at line 460 of file [grcc.h](#).

3.122.4.12 loop

```
int Process::loop
```

Definition at line 461 of file [grcc.h](#).

3.122.4.13 maxnlegs

```
int Process::maxnlegs
```

Definition at line 462 of file [grcc.h](#).

3.122.4.14 clist

```
int Process::clist[GRCC_MAXNCPLG]
```

Definition at line 463 of file [grcc.h](#).

3.122.4.15 nSubproc

```
int Process::nSubproc
```

Definition at line 466 of file [grcc.h](#).

3.122.4.16 sptbl

```
SProcess* Process::sptbl[GRCC_MAXSUBPROCS]
```

Definition at line 467 of file [grcc.h](#).

3.122.4.17 sproc

```
SProcess* Process::sproc
```

Definition at line 468 of file [grcc.h](#).

3.122.4.18 astack

```
AStack* Process::astack
```

Definition at line 471 of file [grcc.h](#).

3.122.4.19 ngraphs

```
BigInt Process::ngraphs
```

Definition at line 474 of file [grcc.h](#).

3.122.4.20 nopi

```
BigInt Process::nopi
```

Definition at line 475 of file [grcc.h](#).

3.122.4.21 wgraphs

```
BigInt Process::wgraphs
```

Definition at line 476 of file [grcc.h](#).

3.122.4.22 wopi

```
BigInt Process::wopi
```

Definition at line 477 of file [grcc.h](#).

3.122.4.23 nMGraphs

`BigInt Process::nMGraphs`

Definition at line 480 of file [grcc.h](#).

3.122.4.24 nMOPI

`BigInt Process::nMOPI`

Definition at line 481 of file [grcc.h](#).

3.122.4.25 wMGraphs

`Fraction Process::wMGraphs`

Definition at line 482 of file [grcc.h](#).

3.122.4.26 wMOPI

`Fraction Process::wMOPI`

Definition at line 483 of file [grcc.h](#).

3.122.4.27 nAGraphs

`BigInt Process::nAGraphs`

Definition at line 485 of file [grcc.h](#).

3.122.4.28 nAOPI

`BigInt Process::nAOPI`

Definition at line 486 of file [grcc.h](#).

3.122.4.29 wAGraphs

`Fraction Process::wAGraphs`

Definition at line 487 of file [grcc.h](#).

3.122.4.30 wAOPI

`Fraction Process::wAOPI`

Definition at line 488 of file [grcc.h](#).

3.122.4.31 sec

```
double Process::sec
```

Definition at line 490 of file [grcc.h](#).


The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.123 R_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for R_const:

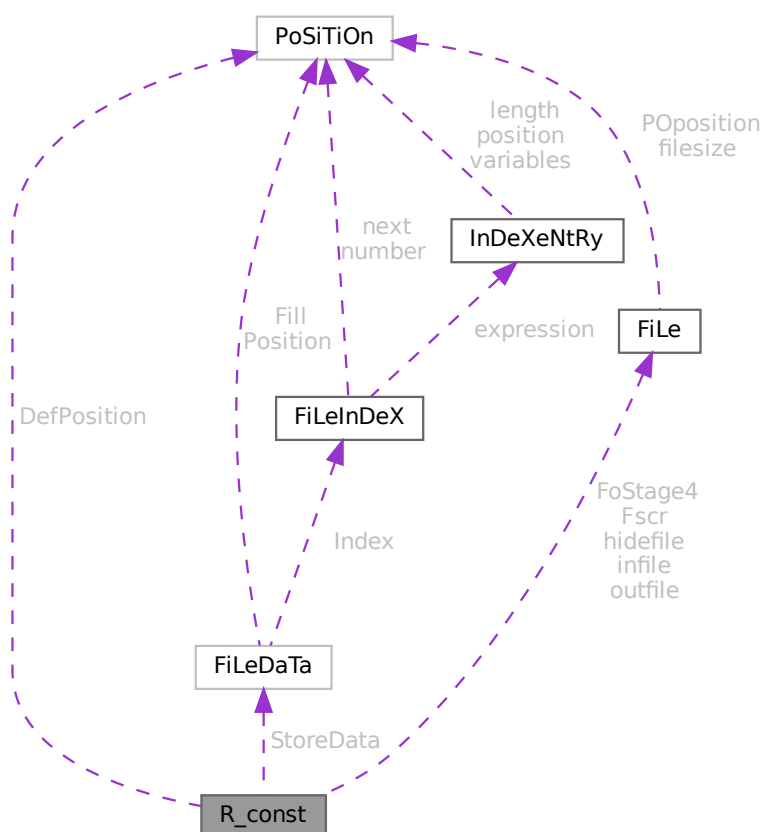

Data Fields

- FILEDATA StoreData
- FILEHANDLE Fscr [3]
- FILEHANDLE FoStage4 [2]
- POSITION DefPosition
- FILEHANDLE * infile
- FILEHANDLE * outfile
- FILEHANDLE * hidefile
- WORD * CompressBuffer
- WORD * ComprTop
- WORD * CompressPointer
- COMPAREDUMMY CompareRoutine
- ULONG * wranfia
- SBYTE * moebiustable
- LONG OldTime
- LONG InInBuf
- LONG InHiBuf
- LONG pWorkSize
- LONG IWorkSize
- LONG posWorkSize
- ULONG wranfseed
- int NoCompress
- int gzipCompress
- int Cnumlhs
- int outtohide
- int wranfcall
- int wranfnpair1
- int wranfnpair2
- WORD GetFile
- WORD KeptInHold
- WORD BracketOn
- WORD MaxBracket
- WORD CurDum
- WORD DeferFlag
- WORD TePos
- WORD sLevel
- WORD Stage4Name
- WORD GetOneFile
- WORD PolyFun
- WORD PolyFunInv
- WORD PolyFunType
- WORD PolyFunExp
- WORD PolyFunVar
- WORD PolyFunPow
- WORD Eside
- WORD MaxDum
- WORD level
- WORD expchanged
- WORD expflags
- WORD CurExpr
- WORD SortType
- WORD ShortSortCount
- WORD modeloptions
- WORD funoffset
- WORD moebiustablesize

3.123.1 Detailed Description

The `R_const` struct is part of the global data and resides either in the ALLGLOBALS struct A, or the ALLPRIVATES struct B (TFORM) under the name R. We see it used with the macro AR as in AR.infile. It has the variables that define the running environment and that should be transferred with a term in a multithreaded run.

Definition at line 1956 of file [structs.h](#).

3.123.2 Field Documentation

3.123.2.1 StoreData

`FILEDATA R_const::StoreData`

Definition at line 1957 of file [structs.h](#).

3.123.2.2 Fscr

`FILEHANDLE R_const::Fscr[3]`

Definition at line 1958 of file [structs.h](#).

3.123.2.3 FoStage4

`FILEHANDLE R_const::FoStage4[2]`

Definition at line 1959 of file [structs.h](#).

3.123.2.4 DefPosition

`POSITION R_const::DefPosition`

Definition at line 1960 of file [structs.h](#).

3.123.2.5 infile

`FILEHANDLE* R_const::infile`

Definition at line 1961 of file [structs.h](#).

3.123.2.6 outfile

`FILEHANDLE* R_const::outfile`

Definition at line 1962 of file [structs.h](#).

3.123.2.7 hidefile

`FILEHANDLE* R_const::hidefile`

Definition at line 1963 of file [structs.h](#).

3.123.2.8 CompressBuffer

`WORD* R_const::CompressBuffer`

Definition at line 1965 of file [structs.h](#).

3.123.2.9 ComprTop

`WORD* R_const::ComprTop`

Definition at line 1966 of file [structs.h](#).

3.123.2.10 CompressPointer

`WORD* R_const::CompressPointer`

Definition at line 1967 of file [structs.h](#).

3.123.2.11 CompareRoutine

`COMPAREDUMMY R_const::CompareRoutine`

Definition at line 1968 of file [structs.h](#).

3.123.2.12 wranfia

`ULONG* R_const::wranfia`

Definition at line 1969 of file [structs.h](#).

3.123.2.13 moebiustable

`SBYTE* R_const::moebiustable`

Definition at line 1970 of file [structs.h](#).

3.123.2.14 OldTime

`LONG R_const::OldTime`

Definition at line 1972 of file [structs.h](#).

3.123.2.15 InInBuf

LONG R_const::InInBuf

Definition at line 1973 of file [structs.h](#).

3.123.2.16 InHiBuf

LONG R_const::InHiBuf

Definition at line 1974 of file [structs.h](#).

3.123.2.17 pWorkSize

LONG R_const::pWorkSize

Definition at line 1975 of file [structs.h](#).

3.123.2.18 lWorkSize

LONG R_const::lWorkSize

Definition at line 1976 of file [structs.h](#).

3.123.2.19 posWorkSize

LONG R_const::posWorkSize

Definition at line 1977 of file [structs.h](#).

3.123.2.20 wranfseed

ULONG R_const::wranfseed

Definition at line 1978 of file [structs.h](#).

3.123.2.21 NoCompress

int R_const::NoCompress

Definition at line 1979 of file [structs.h](#).

3.123.2.22 gzipCompress

int R_const::gzipCompress

Definition at line 1980 of file [structs.h](#).

3.123.2.23 Cnumlhs

```
int R_const::Cnumlhs
```

Definition at line 1981 of file [structs.h](#).

3.123.2.24 outtohide

```
int R_const::outtohide
```

Definition at line 1982 of file [structs.h](#).

3.123.2.25 wranfcall

```
int R_const::wranfcall
```

Definition at line 1986 of file [structs.h](#).

3.123.2.26 wranfnpair1

```
int R_const::wranfnpair1
```

Definition at line 1987 of file [structs.h](#).

3.123.2.27 wranfnpair2

```
int R_const::wranfnpair2
```

Definition at line 1988 of file [structs.h](#).

3.123.2.28 GetFile

```
WORD R_const::GetFile
```

Definition at line 1994 of file [structs.h](#).

3.123.2.29 KeptInHold

```
WORD R_const::KeptInHold
```

Definition at line 1995 of file [structs.h](#).

3.123.2.30 BracketOn

```
WORD R_const::BracketOn
```

Definition at line 1996 of file [structs.h](#).

3.123.2.31 MaxBracket

WORD R_const::MaxBracket

Definition at line 1997 of file [structs.h](#).

3.123.2.32 CurDum

WORD R_const::CurDum

Definition at line 1998 of file [structs.h](#).

3.123.2.33 DeferFlag

WORD R_const::DeferFlag

Definition at line 1999 of file [structs.h](#).

3.123.2.34 TePos

WORD R_const::TePos

Definition at line 2000 of file [structs.h](#).

3.123.2.35 sLevel

WORD R_const::sLevel

Definition at line 2001 of file [structs.h](#).

3.123.2.36 Stage4Name

WORD R_const::Stage4Name

Definition at line 2002 of file [structs.h](#).

3.123.2.37 GetOneFile

WORD R_const::GetOneFile

Definition at line 2003 of file [structs.h](#).

3.123.2.38 PolyFun

WORD R_const::PolyFun

Definition at line 2004 of file [structs.h](#).

3.123.2.39 PolyFunInv

WORD R_const::PolyFunInv

Definition at line 2005 of file [structs.h](#).

3.123.2.40 PolyFunType

WORD R_const::PolyFunType

Definition at line 2006 of file [structs.h](#).

3.123.2.41 PolyFunExp

WORD R_const::PolyFunExp

Definition at line 2007 of file [structs.h](#).

3.123.2.42 PolyFunVar

WORD R_const::PolyFunVar

Definition at line 2008 of file [structs.h](#).

3.123.2.43 PolyFunPow

WORD R_const::PolyFunPow

Definition at line 2009 of file [structs.h](#).

3.123.2.44 Eside

WORD R_const::Eside

Definition at line 2010 of file [structs.h](#).

3.123.2.45 MaxDum

WORD R_const::MaxDum

Definition at line 2011 of file [structs.h](#).

3.123.2.46 level

WORD R_const::level

Definition at line 2012 of file [structs.h](#).

3.123.2.47 expchanged

WORD R_const::expchanged

Definition at line 2013 of file [structs.h](#).

3.123.2.48 expflags

WORD R_const::expflags

Definition at line 2014 of file [structs.h](#).

3.123.2.49 CurExpr

WORD R_const::CurExpr

Definition at line 2015 of file [structs.h](#).

3.123.2.50 SortType

WORD R_const::SortType

Definition at line 2016 of file [structs.h](#).

3.123.2.51 ShortSortCount

WORD R_const::ShortSortCount

Definition at line 2017 of file [structs.h](#).

3.123.2.52 modeloptions

WORD R_const::modeloptions

Definition at line 2018 of file [structs.h](#).

3.123.2.53 funoffset

WORD R_const::funoffset

Definition at line 2019 of file [structs.h](#).

3.123.2.54 moebiustablesize

```
WORD R_const::moebiustablesize
```

Definition at line 2020 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.124 ReNuMbEr Struct Reference

```
#include <structs.h>
```

Collaboration diagram for ReNuMbEr:

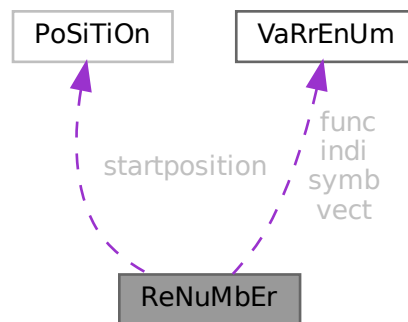

Data Fields

- [POSITION](#) startposition
- [VARRENUM](#) symb
- [VARRENUM](#) indi
- [VARRENUM](#) vect
- [VARRENUM](#) func
- [WORD](#) * symnum
- [WORD](#) * indnum
- [WORD](#) * vecnum
- [WORD](#) * funnum

3.124.1 Detailed Description

Only symb.lo gets dynamically allocated. All other pointers points into this memory.

Definition at line 176 of file [structs.h](#).

3.124.2 Field Documentation

3.124.2.1 startposition

`POSITION ReNuMbEr::startposition`

Definition at line 177 of file [structs.h](#).

3.124.2.2 symb

`VARRENUM ReNuMbEr::symb`

Symbols

Definition at line 179 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), [Generator\(\)](#), [GetFirstTerm\(\)](#), and [TermRenumbrer\(\)](#).

3.124.2.3 indi

`VARRENUM ReNuMbEr::indi`

Indices

Definition at line 180 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumbrer\(\)](#).

3.124.2.4 vect

`VARRENUM ReNuMbEr::vect`

Vectors

Definition at line 181 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumbrer\(\)](#).

3.124.2.5 func

`VARRENUM ReNuMbEr::func`

Functions

Definition at line 182 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumbrer\(\)](#).

3.124.2.6 symnum

WORD* ReNuMbEr::symnum

Renumbered symbols

Definition at line 184 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumber\(\)](#).

3.124.2.7 indnum

WORD* ReNuMbEr::indnum

Renumbered indices

Definition at line 185 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumber\(\)](#).

3.124.2.8 vecnum

WORD* ReNuMbEr::vecnum

Renumbered vectors

Definition at line 186 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumber\(\)](#).

3.124.2.9 funnum

WORD* ReNuMbEr::funnum

Renumbered functions

Definition at line 187 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), and [TermRenumber\(\)](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.125 S_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for S_const:



Data Fields

- [POSITION](#) [MaxExprSize](#)
- [POSITION](#) * [OldOnFile](#)
- [WORD](#) * [OldNumFactors](#)
- [WORD](#) * [Oldvflags](#)
- [WORD](#) * [Olduflags](#)
- [int](#) [NumOldOnFile](#)
- [int](#) [NumOldNumFactors](#)
- [int](#) [MultiThreaded](#)
- [int](#) [Balancing](#)
- [WORD](#) [ExecMode](#)
- [WORD](#) [CollectOverFlag](#)

3.125.1 Detailed Description

The [S_const](#) struct is part of the global data and resides in the ALLGLOBALS struct A under the name S We see it used with the macro AS as in AS.ExecMode It has some variables used by the master in multithreaded runs

Definition at line [1911](#) of file [structs.h](#).

3.125.2 Field Documentation

3.125.2.1 MaxExprSize

```
POSITION S_const::MaxExprSize
```

Definition at line [1912](#) of file [structs.h](#).

3.125.2.2 OldOnFile

`POSITION* S_const::OldOnFile`

Definition at line 1918 of file [structs.h](#).

3.125.2.3 OldNumFactors

`WORD* S_const::OldNumFactors`

Definition at line 1919 of file [structs.h](#).

3.125.2.4 Oldvflags

`WORD* S_const::Oldvflags`

Definition at line 1920 of file [structs.h](#).

3.125.2.5 Olduflags

`WORD* S_const::Olduflags`

Definition at line 1921 of file [structs.h](#).

3.125.2.6 NumOldOnFile

`int S_const::NumOldOnFile`

Definition at line 1925 of file [structs.h](#).

3.125.2.7 NumOldNumFactors

`int S_const::NumOldNumFactors`

Definition at line 1926 of file [structs.h](#).

3.125.2.8 MultiThreaded

`int S_const::MultiThreaded`

Definition at line 1927 of file [structs.h](#).

3.125.2.9 Balancing

`int S_const::Balancing`

Definition at line 1934 of file [structs.h](#).

3.125.2.10 ExecMode

WORD S_const::ExecMode

Definition at line 1935 of file [structs.h](#).

3.125.2.11 CollectOverFlag

WORD S_const::CollectOverFlag

Definition at line 1937 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.126 SeTs Struct Reference

Data Fields

- LONG [name](#)
- WORD [type](#)
- WORD [first](#)
- WORD [last](#)
- WORD [node](#)
- WORD [namesize](#)
- WORD [dimension](#)
- WORD [flags](#)

3.126.1 Detailed Description

Definition at line 513 of file [structs.h](#).

3.126.2 Field Documentation

3.126.2.1 name

LONG SeTs::name

Definition at line 514 of file [structs.h](#).

3.126.2.2 type

WORD SeTs::type

Definition at line 515 of file [structs.h](#).

3.126.2.3 first

WORD SeTs::first

Definition at line 516 of file [structs.h](#).

3.126.2.4 last

WORD SeTs::last

Definition at line 517 of file [structs.h](#).

3.126.2.5 node

WORD SeTs::node

Definition at line 518 of file [structs.h](#).

3.126.2.6 namesize

WORD SeTs::namesize

Definition at line 519 of file [structs.h](#).

3.126.2.7 dimension

WORD SeTs::dimension

Definition at line 520 of file [structs.h](#).

3.126.2.8 flags

WORD SeTs::flags

Definition at line 521 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.127 SETUPPARAMETERS Struct Reference

```
#include <structs.h>
```

Data Fields

- UBYTE * [parameter](#)
- int [type](#)
- int [flags](#)
- LONG [value](#)

3.127.1 Detailed Description

Each setup parameter has one element of the struct [SETUPPARAMETERS](#) assigned to it. By binary search in the array of them we can then locate the proper element by name. We have to assume that two ints make a long and either one or two longs make a pointer. The long before the ints and padding gives a problem in the initialization.

Definition at line [1015](#) of file [structs.h](#).

3.127.2 Field Documentation

3.127.2.1 parameter

```
UBYTE* SETUPPARAMETERS::parameter
```

Definition at line [1016](#) of file [structs.h](#).

3.127.2.2 type

```
int SETUPPARAMETERS::type
```

Definition at line [1017](#) of file [structs.h](#).

3.127.2.3 flags

```
int SETUPPARAMETERS::flags
```

Definition at line [1018](#) of file [structs.h](#).

3.127.2.4 value

```
LONG SETUPPARAMETERS::value
```

Definition at line [1022](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.128 SGroup Class Reference

Public Member Functions

- void [print](#) (void)
- void [newGroup](#) (int nelm, int nclss, int *clss)
- void [clearGroup](#) (void)
- void [delGroup](#) (void)
- int * [genNext](#) (void)
- void [addGroup](#) (int *p)
- BigInt [nElem](#) (void)
- int * [nextElem](#) (void)

Data Fields

- BigInt [size](#)
- BigInt [nelem](#)
- int ** [elem](#)
- int [nnodes](#)
- int [neclass](#)
- int [eclass](#) [GRCC_MAXNODES]
- int [cgen](#)
- int [csav](#)
- int [permg](#) [GRCC_MAXNODES]
- int [perms](#) [GRCC_MAXNODES]
- int [pgr](#) [GRCC_MAXNODES]
- int [pgq](#) [GRCC_MAXNODES]
- int [psr](#) [GRCC_MAXNODES]
- int [psq](#) [GRCC_MAXNODES]

3.128.1 Detailed Description

Definition at line [732](#) of file [grcc.h](#).

3.128.2 Constructor & Destructor Documentation

3.128.2.1 SGroup()

```
SGroup::SGroup (  
    void )
```

Definition at line [5872](#) of file [grcc.cc](#).

3.128.2.2 ~SGroup()

```
SGroup::~~SGroup (  
    void )
```

Definition at line [5881](#) of file [grcc.cc](#).

3.128.3 Member Function Documentation

3.128.3.1 print()

```
void SGroup::print (
    void )
```

Definition at line 5898 of file [grcc.cc](#).

3.128.3.2 newGroup()

```
void SGroup::newGroup (
    int nelm,
    int nclss,
    int * clss )
```

Definition at line 5913 of file [grcc.cc](#).

3.128.3.3 clearGroup()

```
void SGroup::clearGroup (
    void )
```

Definition at line 5938 of file [grcc.cc](#).

3.128.3.4 delGroup()

```
void SGroup::delGroup (
    void )
```

Definition at line 5946 of file [grcc.cc](#).

3.128.3.5 genNext()

```
int * SGroup::genNext (
    void )
```

Definition at line 5962 of file [grcc.cc](#).

3.128.3.6 addGroup()

```
void SGroup::addGroup (
    int * p )
```

Definition at line 5972 of file [grcc.cc](#).

3.128.3.7 nElem()

```
BigInt SGroup::nElem (  
    void )
```

Definition at line 5989 of file [grcc.cc](#).

3.128.3.8 nextElem()

```
int * SGroup::nextElem (  
    void )
```

Definition at line 5995 of file [grcc.cc](#).

3.128.4 Field Documentation

3.128.4.1 size

```
BigInt SGroup::size
```

Definition at line 734 of file [grcc.h](#).

3.128.4.2 nelem

```
BigInt SGroup::nelem
```

Definition at line 735 of file [grcc.h](#).

3.128.4.3 elem

```
int** SGroup::elem
```

Definition at line 736 of file [grcc.h](#).

3.128.4.4 nnodes

```
int SGroup::nnodes
```

Definition at line 737 of file [grcc.h](#).

3.128.4.5 neclass

```
int SGroup::neclass
```

Definition at line 738 of file [grcc.h](#).

3.128.4.6 eclass

```
int SGroup::eclass[GRCC_MAXNODES]
```

Definition at line 739 of file [grcc.h](#).

3.128.4.7 cgen

```
int SGroup::cgen
```

Definition at line 740 of file [grcc.h](#).

3.128.4.8 csav

```
int SGroup::csav
```

Definition at line 741 of file [grcc.h](#).

3.128.4.9 permg

```
int SGroup::permg[GRCC_MAXNODES]
```

Definition at line 742 of file [grcc.h](#).

3.128.4.10 perms

```
int SGroup::perms[GRCC_MAXNODES]
```

Definition at line 743 of file [grcc.h](#).

3.128.4.11 pgr

```
int SGroup::pgr[GRCC_MAXNODES]
```

Definition at line 745 of file [grcc.h](#).

3.128.4.12 pgq

```
int SGroup::pgq[GRCC_MAXNODES]
```

Definition at line 746 of file [grcc.h](#).

3.128.4.13 psr

```
int SGroup::psr[GRCC_MAXNODES]
```

Definition at line 747 of file [grcc.h](#).

3.128.4.14 psq

```
int SGroup::psq[GRCC_MAXNODES]
```

Definition at line 748 of file [grcc.h](#).

The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.129 SHvariables Struct Reference

Data Fields

- WORD * [outterm](#)
- WORD * [outfun](#)
- WORD * [incoef](#)
- WORD * [stop1](#)
- WORD * [stop2](#)
- WORD * [ststop1](#)
- WORD * [ststop2](#)
- FINISHUFFLE [finishuf](#)
- DO_UFFLE [do_uffle](#)
- LONG [combilast](#)
- WORD [nincoef](#)
- WORD [level](#)
- WORD [thefunction](#)
- WORD [option](#)

3.129.1 Detailed Description

Definition at line 1244 of file [structs.h](#).

3.129.2 Field Documentation

3.129.2.1 outterm

```
WORD* SHvariables::outterm
```

Definition at line 1245 of file [structs.h](#).

3.129.2.2 outfun

```
WORD* SHvariables::outfun
```

Definition at line 1246 of file [structs.h](#).

3.129.2.3 incoef

WORD* SHvariables::incoef

Definition at line 1247 of file [structs.h](#).

3.129.2.4 stop1

WORD* SHvariables::stop1

Definition at line 1248 of file [structs.h](#).

3.129.2.5 stop2

WORD* SHvariables::stop2

Definition at line 1249 of file [structs.h](#).

3.129.2.6 ststop1

WORD* SHvariables::ststop1

Definition at line 1250 of file [structs.h](#).

3.129.2.7 ststop2

WORD* SHvariables::ststop2

Definition at line 1251 of file [structs.h](#).

3.129.2.8 finishuf

FINISHUFFLE SHvariables::finishuf

Definition at line 1252 of file [structs.h](#).

3.129.2.9 do_uffle

DO_UFFLE SHvariables::do_uffle

Definition at line 1253 of file [structs.h](#).

3.129.2.10 combilast

LONG SHvariables::combilast

Definition at line 1254 of file [structs.h](#).

3.129.2.11 nincoef

WORD SHvariables::nincoef

Definition at line 1255 of file [structs.h](#).

3.129.2.12 level

WORD SHvariables::level

Definition at line 1256 of file [structs.h](#).

3.129.2.13 thefunction

WORD SHvariables::thefunction

Definition at line 1257 of file [structs.h](#).

3.129.2.14 option

WORD SHvariables::option

Definition at line 1258 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.130 sOrT Struct Reference

```
#include <structs.h>
```

Collaboration diagram for sOrT:

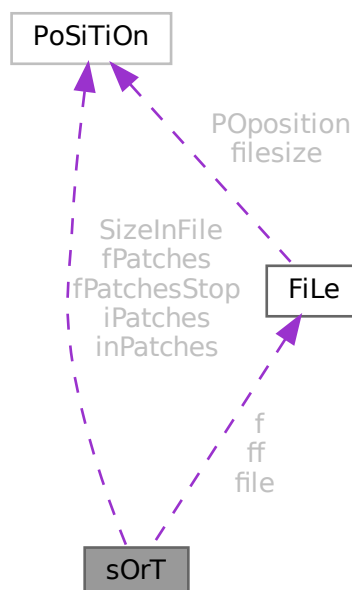

Data Fields

- [FILEHANDLE](#) file
- [POSITION](#) [SizeInFile](#) [3]
- WORD * [lBuffer](#)
- WORD * [lTop](#)
- WORD * [lFill](#)
- WORD * [used](#)
- WORD * [sBuffer](#)
- WORD * [sTop](#)
- WORD * [sTop2](#)
- WORD * [sHalf](#)
- WORD * [sFill](#)
- WORD ** [sPointer](#)
- WORD ** [PoinFill](#)
- WORD * [cBuffer](#)
- WORD ** [Patches](#)
- WORD ** [pStop](#)
- WORD ** [poina](#)
- WORD ** [poin2a](#)
- WORD * [ktoi](#)
- WORD * [tree](#)
- [POSITION](#) * [fPatches](#)
- [POSITION](#) * [inPatches](#)
- [POSITION](#) * [fPatchesStop](#)
- [POSITION](#) * [iPatches](#)
- [FILEHANDLE](#) * [f](#)
- [FILEHANDLE](#) ** [ff](#)
- LONG [sTerms](#)
- LONG [LargeSize](#)
- LONG [SmallSize](#)
- LONG [SmallEsize](#)
- LONG [TermsInSmall](#)
- LONG [Terms2InSmall](#)
- LONG [GenTerms](#)
- LONG [TermsLeft](#)
- LONG [GenSpace](#)
- LONG [SpaceLeft](#)
- LONG [putinsize](#)
- LONG [ninterms](#)
- int [MaxPatches](#)
- int [MaxFpatches](#)
- int [type](#)
- int [lPatch](#)
- int [fPatchN1](#)
- int [PolyWise](#)
- int [PolyFlag](#)
- int [cBufferSize](#)
- int [maxtermsize](#)
- int [newmaxtermsize](#)
- int [outputmode](#)
- int [stagelevel](#)
- WORD [fPatchN](#)
- WORD [inNum](#)
- WORD [stage4](#)

3.130.1 Detailed Description

The struct SORTING is used to control a sort operation. It includes a small and a large buffer and arrays for keeping track of various stages of the (merge) sorts. Each sort level has its own struct and different levels can have different sizes for its arrays. Also different threads have their own set of SORTING structs.

Definition at line 1115 of file [structs.h](#).

3.130.2 Field Documentation

3.130.2.1 file

`FILEHANDLE sOrT::file`

Definition at line 1116 of file [structs.h](#).

3.130.2.2 SizeInFile

`POSITION sOrT::SizeInFile[3]`

Definition at line 1117 of file [structs.h](#).

3.130.2.3 lBuffer

`WORD* sOrT::lBuffer`

Definition at line 1118 of file [structs.h](#).

3.130.2.4 lTop

`WORD* sOrT::lTop`

Definition at line 1119 of file [structs.h](#).

3.130.2.5 lFill

`WORD* sOrT::lFill`

Definition at line 1120 of file [structs.h](#).

3.130.2.6 used

`WORD* sOrT::used`

Definition at line 1121 of file [structs.h](#).

3.130.2.7 sBuffer

```
WORD* sOrT::sBuffer
```

Definition at line 1122 of file [structs.h](#).

3.130.2.8 sTop

```
WORD* sOrT::sTop
```

Definition at line 1123 of file [structs.h](#).

3.130.2.9 sTop2

```
WORD* sOrT::sTop2
```

Definition at line 1124 of file [structs.h](#).

3.130.2.10 sHalf

```
WORD* sOrT::sHalf
```

Definition at line 1125 of file [structs.h](#).

3.130.2.11 sFill

```
WORD* sOrT::sFill
```

Definition at line 1126 of file [structs.h](#).

3.130.2.12 sPointer

```
WORD** sOrT::sPointer
```

Definition at line 1127 of file [structs.h](#).

3.130.2.13 PoinFill

```
WORD** sOrT::PoinFill
```

Definition at line 1128 of file [structs.h](#).

3.130.2.14 cBuffer

```
WORD* sOrT::cBuffer
```

Definition at line 1129 of file [structs.h](#).

3.130.2.15 Patches

WORD** sOrT::Patches

Definition at line 1130 of file [structs.h](#).

3.130.2.16 pStop

WORD** sOrT::pStop

Definition at line 1131 of file [structs.h](#).

3.130.2.17 poina

WORD** sOrT::poina

Definition at line 1132 of file [structs.h](#).

3.130.2.18 poin2a

WORD** sOrT::poin2a

Definition at line 1133 of file [structs.h](#).

3.130.2.19 ktoi

WORD* sOrT::ktoi

Definition at line 1134 of file [structs.h](#).

3.130.2.20 tree

WORD* sOrT::tree

Definition at line 1135 of file [structs.h](#).

3.130.2.21 fPatches

POSITION* sOrT::fPatches

Definition at line 1141 of file [structs.h](#).

3.130.2.22 inPatches

POSITION* sOrT::inPatches

Definition at line 1142 of file [structs.h](#).

3.130.2.23 fPatchesStop

`POSITION* sOrT::fPatchesStop`

Definition at line 1143 of file [structs.h](#).

3.130.2.24 iPatches

`POSITION* sOrT::iPatches`

Definition at line 1144 of file [structs.h](#).

3.130.2.25 f

`FILEHANDLE* sOrT::f`

Definition at line 1145 of file [structs.h](#).

3.130.2.26 ff

`FILEHANDLE** sOrT::ff`

Definition at line 1146 of file [structs.h](#).

3.130.2.27 sTerms

`LONG sOrT::sTerms`

Definition at line 1147 of file [structs.h](#).

3.130.2.28 LargeSize

`LONG sOrT::LargeSize`

Definition at line 1148 of file [structs.h](#).

3.130.2.29 SmallSize

`LONG sOrT::SmallSize`

Definition at line 1149 of file [structs.h](#).

3.130.2.30 SmallEsize

`LONG sOrT::SmallEsize`

Definition at line 1150 of file [structs.h](#).

3.130.2.31 TermsInSmall

LONG sOrT::TermsInSmall

Definition at line 1151 of file [structs.h](#).

3.130.2.32 Terms2InSmall

LONG sOrT::Terms2InSmall

Definition at line 1152 of file [structs.h](#).

3.130.2.33 GenTerms

LONG sOrT::GenTerms

Definition at line 1153 of file [structs.h](#).

3.130.2.34 TermsLeft

LONG sOrT::TermsLeft

Definition at line 1154 of file [structs.h](#).

3.130.2.35 GenSpace

LONG sOrT::GenSpace

Definition at line 1155 of file [structs.h](#).

3.130.2.36 SpaceLeft

LONG sOrT::SpaceLeft

Definition at line 1156 of file [structs.h](#).

3.130.2.37 putinsize

LONG sOrT::putinsize

Definition at line 1157 of file [structs.h](#).

3.130.2.38 ninterms

LONG sOrT::ninterms

Definition at line 1158 of file [structs.h](#).

3.130.2.39 MaxPatches

```
int sOrT::MaxPatches
```

Definition at line 1159 of file [structs.h](#).

3.130.2.40 MaxFpatches

```
int sOrT::MaxFpatches
```

Definition at line 1160 of file [structs.h](#).

3.130.2.41 type

```
int sOrT::type
```

Definition at line 1161 of file [structs.h](#).

3.130.2.42 lPatch

```
int sOrT::lPatch
```

Definition at line 1162 of file [structs.h](#).

3.130.2.43 fPatchN1

```
int sOrT::fPatchN1
```

Definition at line 1163 of file [structs.h](#).

3.130.2.44 PolyWise

```
int sOrT::PolyWise
```

Definition at line 1164 of file [structs.h](#).

3.130.2.45 PolyFlag

```
int sOrT::PolyFlag
```

Definition at line 1165 of file [structs.h](#).

3.130.2.46 cBufferSize

```
int sOrT::cBufferSize
```

Definition at line 1166 of file [structs.h](#).

3.130.2.47 maxtermsize

```
int sOrT::maxtermsize
```

Definition at line 1167 of file [structs.h](#).

3.130.2.48 newmaxtermsize

```
int sOrT::newmaxtermsize
```

Definition at line 1168 of file [structs.h](#).

3.130.2.49 outputmode

```
int sOrT::outputmode
```

Definition at line 1169 of file [structs.h](#).

3.130.2.50 stagelevel

```
int sOrT::stagelevel
```

Definition at line 1170 of file [structs.h](#).

3.130.2.51 fPatchN

```
WORD sOrT::fPatchN
```

Definition at line 1171 of file [structs.h](#).

3.130.2.52 inNum

```
WORD sOrT::inNum
```

Definition at line 1172 of file [structs.h](#).

3.130.2.53 stage4

```
WORD sOrT::stage4
```


Definition at line 1173 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.131 SpecTatoR Struct Reference

Collaboration diagram for SpecTatoR:

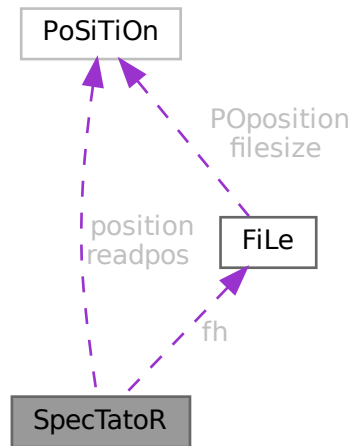

Data Fields

- `POSITION position`
- `POSITION readpos`
- `FILEHANDLE * fh`
- `char * name`
- `WORD exprnumber`
- `WORD flags`

3.131.1 Detailed Description

Definition at line 751 of file [structs.h](#).

3.131.2 Field Documentation

3.131.2.1 position

`POSITION SpecTatoR::position`

Definition at line 752 of file [structs.h](#).

3.131.2.2 readpos

`POSITION SpecTatoR::readpos`

Definition at line 753 of file [structs.h](#).

```
FILEHANDLE* SpecTatoR::fh
```

3.131.2.4 name

Definition at line 755 of file structs.h.

WORD SpecTatoR::exprnumber


3.131.2.6 flags

Definition at line 757 of file structs.h.

The documentation for this struct was generated from the following file:

- `structs.h`

Collaboration diagram for SProcess:

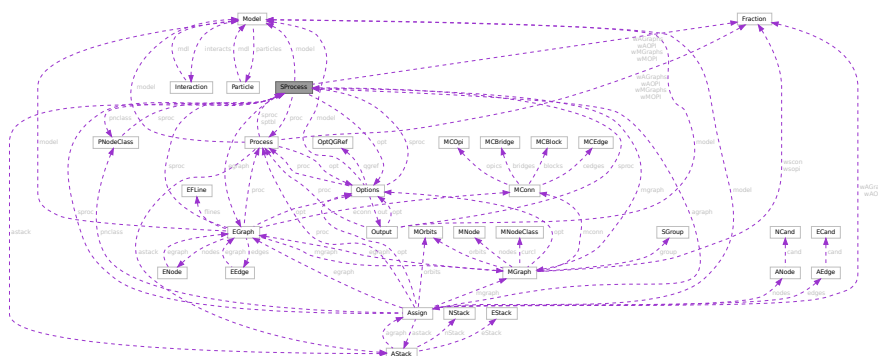

Public Member Functions

- [SProcess](#) ([Model](#) *mdl, [Process](#) *prc, [Options](#) *opts, int sid, int *clst, int ncls, [NCInput](#) *cls)
- [SProcess](#) ([Model](#) *mdl, [Process](#) *prc, [Options](#) *opts, int sid, int *clst, int ncls, int *cdeg, int *ctyp, int *ptcl, int *cpl, int *cnum, int *cmind, int *cmaxd)
- void [prSProcess](#) (void)
- [BigInt](#) [generate](#) (void)
- void [assign](#) ([MGraph](#) *mgr)
- int [toMNodeClass](#) (int *ctyp, int *cldeg, int *clnum, int *cmind, int *cmaxd)
- [PNodeClass](#) * [match](#) ([MGraph](#) *mgr)
- void [endMGraph](#) ([MGraph](#) *mgr)
- void [endAGraph](#) ([EGraph](#) *egr)
- void [resultMGraph](#) ([BigInt](#) nmgraphs, [Fraction](#) mwsum, [BigInt](#) nmopi, [Fraction](#) mwopi)
- void [resultAGraph](#) ([BigInt](#) nagraphs, [Fraction](#) awsum, [BigInt](#) naopi, [Fraction](#) awopi)

Data Fields

- [Model](#) * [model](#)
- [Process](#) * [proc](#)
- [Options](#) * [opt](#)
- [PNodeClass](#) * [pnclass](#)
- [AStack](#) * [astack](#)
- [MGraph](#) * [mgraph](#)
- [EGraph](#) * [egraph](#)
- [Assign](#) * [agraph](#)
- int * [cl2nd](#)
- int * [nd2cl](#)
- int [nclass](#)
- int [ninitl](#)
- int [nfinal](#)
- int [nvert](#)
- int [clist](#) [GRCC_MAXNCPLG]
- int [id](#)
- int [loop](#)
- int [nNodes](#)
- int [nEdges](#)
- int [nExtern](#)
- int [ncouple](#)
- int [tCouple](#)
- int [DUMMY_PADDING](#)
- [BigInt](#) [mgrcount](#)
- [BigInt](#) [agrcount](#)
- [BigInt](#) [extperm](#)
- [BigInt](#) [nMGraphs](#)
- [BigInt](#) [nMOPI](#)
- [Fraction](#) [wMGraphs](#)
- [Fraction](#) [wMOPI](#)
- [BigInt](#) [nAGraphs](#)
- [BigInt](#) [nAOPI](#)
- [Fraction](#) [wAGraphs](#)
- [Fraction](#) [wAOPI](#)

3.132.1 Detailed Description

Definition at line 373 of file [grcc.h](#).

3.132.2 Constructor & Destructor Documentation

3.132.2.1 SProcess() [1/2]

```
SProcess::SProcess (
    Model * mdl,
    Process * prc,
    Options * opts,
    int sid,
    int * clst,
    int ncls,
    NCInput * cls )
```

Definition at line 2996 of file [grcc.cc](#).

3.132.2.2 SProcess() [2/2]

```
SProcess::SProcess (
    Model * mdl,
    Process * prc,
    Options * opts,
    int sid,
    int * clst,
    int ncls,
    int * cdeg,
    int * ctyp,
    int * ptcl,
    int * cpl,
    int * cnum,
    int * cmind,
    int * cmaxd )
```

Definition at line 2827 of file [grcc.cc](#).

3.132.2.3 ~SProcess()

```
SProcess::~~SProcess (
    void )
```

Definition at line 3158 of file [grcc.cc](#).

3.132.3 Member Function Documentation

3.132.3.1 prSProcess()

```
void SProcess::prSProcess (
    void )
```

Definition at line 3167 of file [grcc.cc](#).

3.132.3.2 generate()

```
BigInt SProcess::generate (
    void )
```

Definition at line 3179 of file [grcc.cc](#).

3.132.3.3 assign()

```
void SProcess::assign (
    MGraph * mgr )
```

Definition at line 3223 of file [grcc.cc](#).

3.132.3.4 toMNodeClass()

```
int SProcess::toMNodeClass (
    int * ctyp,
    int * cldeg,
    int * clnum,
    int * cmind,
    int * cmaxd )
```

Definition at line 3204 of file [grcc.cc](#).

3.132.3.5 match()

```
PNodeClass * SProcess::match (
    MGraph * mgr )
```

Definition at line 3240 of file [grcc.cc](#).

3.132.3.6 endMGraph()

```
void SProcess::endMGraph (
    MGraph * mgr )
```

Definition at line 3319 of file [grcc.cc](#).

3.132.3.7 endAGraph()

```
void SProcess::endAGraph (
    EGraph * egr )
```

Definition at line 3329 of file [grcc.cc](#).

3.132.3.8 resultMGraph()

```
void SProcess::resultMGraph (
    BigInt nmgraphs,
    Fraction mwsum,
    BigInt nmopi,
    Fraction mwopi )
```

Definition at line 3301 of file [grcc.cc](#).

3.132.3.9 resultAGraph()

```
void SProcess::resultAGraph (
    BigInt nagraphs,
    Fraction awsum,
    BigInt naopi,
    Fraction awopi )
```

Definition at line 3310 of file [grcc.cc](#).

3.132.4 Field Documentation

3.132.4.1 model

```
Model* SProcess::model
```

Definition at line 380 of file [grcc.h](#).

3.132.4.2 proc

```
Process* SProcess::proc
```

Definition at line 381 of file [grcc.h](#).

3.132.4.3 opt

```
Options* SProcess::opt
```

Definition at line 382 of file [grcc.h](#).

3.132.4.4 pnclass

```
PNodeClass* SProcess::pnclass
```

Definition at line 383 of file [grcc.h](#).

3.132.4.5 astack

`AStack* SProcess::astack`

Definition at line 384 of file [grcc.h](#).

3.132.4.6 mgraph

`MGraph* SProcess::mgraph`

Definition at line 386 of file [grcc.h](#).

3.132.4.7 egraph

`EGraph* SProcess::egraph`

Definition at line 387 of file [grcc.h](#).

3.132.4.8 agraph

`Assign* SProcess::agraph`

Definition at line 388 of file [grcc.h](#).

3.132.4.9 cl2nd

`int* SProcess::cl2nd`

Definition at line 390 of file [grcc.h](#).

3.132.4.10 nd2cl

`int* SProcess::nd2cl`

Definition at line 392 of file [grcc.h](#).

3.132.4.11 nclass

`int SProcess::nclass`

Definition at line 393 of file [grcc.h](#).

3.132.4.12 ninitl

`int SProcess::ninitl`

Definition at line 395 of file [grcc.h](#).

3.132.4.13 nfinal

```
int SProcess::nfinal
```

Definition at line 396 of file [grcc.h](#).

3.132.4.14 nvert

```
int SProcess::nvert
```

Definition at line 397 of file [grcc.h](#).

3.132.4.15 clist

```
int SProcess::clist[GRCC_MAXNCPLG]
```

Definition at line 399 of file [grcc.h](#).

3.132.4.16 id

```
int SProcess::id
```

Definition at line 400 of file [grcc.h](#).

3.132.4.17 loop

```
int SProcess::loop
```

Definition at line 401 of file [grcc.h](#).

3.132.4.18 nNodes

```
int SProcess::nNodes
```

Definition at line 402 of file [grcc.h](#).

3.132.4.19 nEdges

```
int SProcess::nEdges
```

Definition at line 403 of file [grcc.h](#).

3.132.4.20 nExtern

```
int SProcess::nExtern
```

Definition at line 404 of file [grcc.h](#).

3.132.4.21 ncouple

```
int SProcess::ncouple
```

Definition at line 405 of file [grcc.h](#).

3.132.4.22 tCouple

```
int SProcess::tCouple
```

Definition at line 406 of file [grcc.h](#).

3.132.4.23 DUMMYPADDING

```
int SProcess::DUMMYPADDING
```

Definition at line 408 of file [grcc.h](#).

3.132.4.24 mgrcount

```
BigInt SProcess::mgrcount
```

Definition at line 410 of file [grcc.h](#).

3.132.4.25 agrcount

```
BigInt SProcess::agrcount
```

Definition at line 411 of file [grcc.h](#).

3.132.4.26 extperm

```
BigInt SProcess::extperm
```

Definition at line 412 of file [grcc.h](#).

3.132.4.27 nMGraphs

```
BigInt SProcess::nMGraphs
```

Definition at line 415 of file [grcc.h](#).

3.132.4.28 nMOPI

```
BigInt SProcess::nMOPI
```

Definition at line 416 of file [grcc.h](#).

3.132.4.29 wMGraphs

`Fraction SProcess::wMGraphs`

Definition at line 417 of file [grcc.h](#).

3.132.4.30 wMOPI

`Fraction SProcess::wMOPI`

Definition at line 418 of file [grcc.h](#).

3.132.4.31 nAGraphs

`BigInt SProcess::nAGraphs`

Definition at line 420 of file [grcc.h](#).

3.132.4.32 nAOPI

`BigInt SProcess::nAOPI`

Definition at line 421 of file [grcc.h](#).

3.132.4.33 wAGraphs

`Fraction SProcess::wAGraphs`

Definition at line 422 of file [grcc.h](#).

3.132.4.34 wAOPI

`Fraction SProcess::wAOPI`

Definition at line 423 of file [grcc.h](#).


The documentation for this class was generated from the following files:

- [grcc.h](#)
- [grcc.cc](#)

3.133 StOrEcAcHe Struct Reference

```
#include <structs.h>
```

Collaboration diagram for StOrEcAcHe:



Data Fields

- `POSITION position`
- `POSITION toppos`
- `struct StOrEcAcHe * next`
- `WORD buffer [2]`

3.133.1 Detailed Description

The struct of type STORECACHE is used by a caching system for reading terms from stored expressions. Each thread should have its own system of caches.

Definition at line 1045 of file [structs.h](#).

3.133.2 Field Documentation

3.133.2.1 position

```
POSITION StOrEcAcHe::position
```

Definition at line 1046 of file [structs.h](#).

3.133.2.2 toppos

```
POSITION StOrEcAcHe::toppos
```

Definition at line 1047 of file [structs.h](#).

3.133.2.3 next

```
struct StOrEcAcHe* StOrEcAcHe::next
```

Definition at line [1048](#) of file [structs.h](#).

3.133.2.4 buffer

```
WORD StOrEcAcHe::buffer[2]
```

Definition at line [1049](#) of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.134 STOREHEADER Struct Reference

```
#include <structs.h>
```

Data Fields

- UBYTE [headermark](#) [8]
- UBYTE [lenWORD](#)
- UBYTE [lenLONG](#)
- UBYTE [lenPOS](#)
- UBYTE [lenPOINTER](#)
- UBYTE [endianness](#) [16]
- UBYTE [sSym](#)
- UBYTE [sInd](#)
- UBYTE [sVec](#)
- UBYTE [sFun](#)
- UBYTE [maxpower](#) [16]
- UBYTE [wildoffset](#) [16]
- UBYTE [revision](#)
- UBYTE [reserved](#) [512-8-4-16-4-16-16-1]

3.134.1 Detailed Description

Defines the structure of the file header for store-files and save-files.

The first 8 bytes serve as a unique mark to identity save-files that contain such a header. Older versions of FORM don't have this header and will write the POSITION of the next file index (struct [FiLeInDeX](#)) here, which is always different from this pattern.

It is always 512 bytes long.

Definition at line [75](#) of file [structs.h](#).

3.134.2 Field Documentation

3.134.2.1 headermark

```
UBYTE STOREHEADER::headermark[8]
```

Pattern for header identification. Old versions of FORM have a maximum sizeof(POSITION) of 8

Definition at line 76 of file [structs.h](#).

3.134.2.2 lenWORD

```
UBYTE STOREHEADER::lenWORD
```

Number of bytes for WORD

Definition at line 78 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.3 lenLONG

```
UBYTE STOREHEADER::lenLONG
```

Number of bytes for LONG

Definition at line 79 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.4 lenPOS

```
UBYTE STOREHEADER::lenPOS
```

Number of bytes for POSITION

Definition at line 80 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.5 lenPOINTER

```
UBYTE STOREHEADER::lenPOINTER
```

Number of bytes for void *

Definition at line 81 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.6 endianness

```
UBYTE STOREHEADER::endianness[16]
```

Used to determine endianness, sizeof(int) should be ≤ 16

Definition at line 82 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.7 sSym

```
UBYTE STOREHEADER::sSym
```

sizeof(struct SyMbOl)

Definition at line 83 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.8 sInd

```
UBYTE STOREHEADER::sInd
```

sizeof(struct InDeX)

Definition at line 84 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.9 sVec

```
UBYTE STOREHEADER::sVec
```

sizeof(struct VeCtOr)

Definition at line 85 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.10 sFun

```
UBYTE STOREHEADER::sFun
```

sizeof(struct FuNcTiOn)

Definition at line 86 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.11 maxpower

```
UBYTE STOREHEADER::maxpower[16]
```

Maximum power, see `#MAXPOWER`

Definition at line 87 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.12 wildoffset

```
UBYTE STOREHEADER::wildoffset[16]
```

`#WILDOFFSET` macro

Definition at line 88 of file [structs.h](#).

Referenced by [WriteStoreHeader\(\)](#).

3.134.2.13 revision

```
UBYTE STOREHEADER::revision
```

Revision number of save-file system

Definition at line 89 of file [structs.h](#).

3.134.2.14 reserved

```
UBYTE STOREHEADER::reserved[512-8-4-16-4-16-16-1]
```

Padding to 512 bytes

Definition at line 90 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.135 StreaM Struct Reference

```
#include <structs.h>
```


Data Fields

- off_t [fileposition](#)
- off_t [linenumber](#)
- off_t [prevline](#)
- UBYTE * [buffer](#)
- UBYTE * [pointer](#)
- UBYTE * [top](#)
- UBYTE * [FoldName](#)
- UBYTE * [name](#)
- UBYTE * [pname](#)
- LONG [buffersize](#)
- LONG [bufferposition](#)
- LONG [inbuffer](#)
- int [previous](#)
- int [handle](#)
- int [type](#)
- int [prevars](#)
- int [previousNoShowInput](#)
- int [eqnum](#)
- int [afterwards](#)
- int [olddelay](#)
- int [oldnoshowinput](#)
- UBYTE [isnextchar](#)
- UBYTE [nextchar](#) [2]
- UBYTE [reserved](#)

3.135.1 Detailed Description

Input is read from 'streams' which are represented by objects of type STREAM. A stream can be a file, a do-loop, a procedure, the string value of a preprocessor variable When a new stream is opened we have to keep information about where to fall back in the parent stream to allow this to happen even in the middle of reading names etc as would be the case with a`i'b

Definition at line [723](#) of file [structs.h](#).

3.135.2 Field Documentation

3.135.2.1 fileposition

```
off_t Stream::fileposition
```

Definition at line [724](#) of file [structs.h](#).

3.135.2.2 linenumber

```
off_t Stream::linenumber
```

Definition at line [725](#) of file [structs.h](#).

3.135.2.3 prevline

```
off_t Stream::prevline
```

Definition at line 726 of file [structs.h](#).

3.135.2.4 buffer

```
UBYTE* Stream::buffer
```

[D] Size in buffersize

Definition at line 727 of file [structs.h](#).

3.135.2.5 pointer

```
UBYTE* Stream::pointer
```

pointer into buffer memory

Definition at line 728 of file [structs.h](#).

3.135.2.6 top

```
UBYTE* Stream::top
```

pointer into buffer memory

Definition at line 729 of file [structs.h](#).

3.135.2.7 FoldName

```
UBYTE* Stream::FoldName
```

[D]

Definition at line 730 of file [structs.h](#).

3.135.2.8 name

```
UBYTE* Stream::name
```

[D]

Definition at line 731 of file [structs.h](#).

3.135.2.9 pname

```
UBYTE* Stream::pname
```

for DOLLARSTREAM and PREVARSTREAM it points always to name, else it is undefined

Definition at line 732 of file [structs.h](#).

3.135.2.10 buffersize

```
LONG Stream::buffersize
```

Definition at line 734 of file [structs.h](#).

3.135.2.11 bufferposition

```
LONG Stream::bufferposition
```

Definition at line 735 of file [structs.h](#).

3.135.2.12 inbuffer

```
LONG Stream::inbuffer
```

Definition at line 736 of file [structs.h](#).

3.135.2.13 previous

```
int Stream::previous
```

Definition at line 737 of file [structs.h](#).

3.135.2.14 handle

```
int Stream::handle
```

Definition at line 738 of file [structs.h](#).

3.135.2.15 type

```
int Stream::type
```

Definition at line 739 of file [structs.h](#).

3.135.2.16 prevars

```
int Stream::prevars
```

Definition at line 740 of file [structs.h](#).

3.135.2.17 previousNoShowInput

```
int Stream::previousNoShowInput
```

Definition at line 741 of file [structs.h](#).

3.135.2.18 eqnum

```
int Stream::eqnum
```

Definition at line 742 of file [structs.h](#).

3.135.2.19 afterwards

```
int Stream::afterwards
```

Definition at line 743 of file [structs.h](#).

3.135.2.20 olddelay

```
int Stream::olddelay
```

Definition at line 744 of file [structs.h](#).

3.135.2.21 oldnoshowinput

```
int Stream::oldnoshowinput
```

Definition at line 745 of file [structs.h](#).

3.135.2.22 isnextchar

```
UBYTE Stream::isnextchar
```

Definition at line 746 of file [structs.h](#).

3.135.2.23 nextchar

```
UBYTE Stream::nextchar[2]
```

Definition at line 747 of file [structs.h](#).

3.135.2.24 reserved

`UBYTE Stream::reserved`

Definition at line 748 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.136 SuBbUf Struct Reference

Data Fields

- WORD [subexpnum](#)
- WORD [buffernum](#)

3.136.1 Detailed Description

Definition at line 263 of file [compiler.c](#).

3.136.2 Field Documentation

3.136.2.1 subexpnum

`WORD SuBbUf::subexpnum`

Definition at line 264 of file [compiler.c](#).

3.136.2.2 buffernum

`WORD SuBbUf::buffernum`


Definition at line 265 of file [compiler.c](#).

The documentation for this struct was generated from the following file:

- [compiler.c](#)

3.137 SWITCH Struct Reference

Collaboration diagram for SWITCH:



Data Fields

- [SWICHTABLE * table](#)
- [SWICHTABLE defaultcase](#)
- [SWICHTABLE endswitch](#)
- WORD [typetable](#)
- WORD [maxcase](#)
- WORD [mincase](#)
- WORD [numcases](#)
- WORD [tablesize](#)
- WORD [caseoffset](#)
- WORD [iflevel](#)
- WORD [whilelevel](#)
- WORD [nestingsum](#)
- WORD [padding](#)

3.137.1 Detailed Description

Definition at line [1345](#) of file [structs.h](#).

3.137.2 Field Documentation

3.137.2.1 table

[SWICHTABLE*](#) [SWITCH::table](#)

Definition at line [1346](#) of file [structs.h](#).

3.137.2.2 defaultcase

`SWITCHTABLE SWITCH::defaultcase`

Definition at line 1347 of file [structs.h](#).

3.137.2.3 endswitch

`SWITCHTABLE SWITCH::endswitch`

Definition at line 1348 of file [structs.h](#).

3.137.2.4 typetable

`WORD SWITCH::typetable`

Definition at line 1349 of file [structs.h](#).

3.137.2.5 maxcase

`WORD SWITCH::maxcase`

Definition at line 1350 of file [structs.h](#).

3.137.2.6 mincase

`WORD SWITCH::mincase`

Definition at line 1351 of file [structs.h](#).

3.137.2.7 numcases

`WORD SWITCH::numcases`

Definition at line 1352 of file [structs.h](#).

3.137.2.8 tablesize

`WORD SWITCH::tablesize`

Definition at line 1353 of file [structs.h](#).

3.137.2.9 caseoffset

`WORD SWITCH::caseoffset`

Definition at line 1354 of file [structs.h](#).

3.137.2.10 iflevel

WORD SWITCH::iflevel

Definition at line 1355 of file [structs.h](#).

3.137.2.11 whilelevel

WORD SWITCH::whilelevel

Definition at line 1356 of file [structs.h](#).

3.137.2.12 nestingsum

WORD SWITCH::nestingsum

Definition at line 1357 of file [structs.h](#).

3.137.2.13 padding

WORD SWITCH::padding

Definition at line 1358 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.138 SWITCHTABLE Struct Reference

Data Fields

- WORD [ncase](#)
- WORD [value](#)
- WORD [compbuffer](#)

3.138.1 Detailed Description

Definition at line 1339 of file [structs.h](#).

3.138.2 Field Documentation

3.138.2.1 ncase

WORD SWITCHTABLE::ncase

Definition at line 1340 of file [structs.h](#).

3.138.2.2 value

WORD SWITCHTABLE::value

Definition at line 1341 of file [structs.h](#).

3.138.2.3 compbuffer

WORD SWITCHTABLE::compbuffer

Definition at line 1342 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.139 SyMbOI Struct Reference

Data Fields

- LONG [name](#)
- WORD [minpower](#)
- WORD [maxpower](#)
- WORD [complex](#)
- WORD [number](#)
- WORD [flags](#)
- WORD [node](#)
- WORD [namesize](#)
- WORD [dimension](#)

3.139.1 Detailed Description

Definition at line 416 of file [structs.h](#).

3.139.2 Field Documentation

3.139.2.1 name

LONG SyMbOl::name

Definition at line 417 of file [structs.h](#).

3.139.2.2 minpower

WORD SyMbOl::minpower

Definition at line 418 of file [structs.h](#).

3.139.2.3 maxpower

WORD SyMbOl::maxpower

Definition at line 419 of file [structs.h](#).

3.139.2.4 complex

WORD SyMbOl::complex

Definition at line 420 of file [structs.h](#).

3.139.2.5 number

WORD SyMbOl::number

Definition at line 421 of file [structs.h](#).

3.139.2.6 flags

WORD SyMbOl::flags

Definition at line 422 of file [structs.h](#).

3.139.2.7 node

WORD SyMbOl::node

Definition at line 423 of file [structs.h](#).

3.139.2.8 namesize

WORD SyMbOl::namesize

Definition at line 424 of file [structs.h](#).

3.139.2.9 dimension

WORD SyMbOl::dimension

Definition at line 425 of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.140 T_const Struct Reference

```
#include <structs.h>
```

Collaboration diagram for T_const:

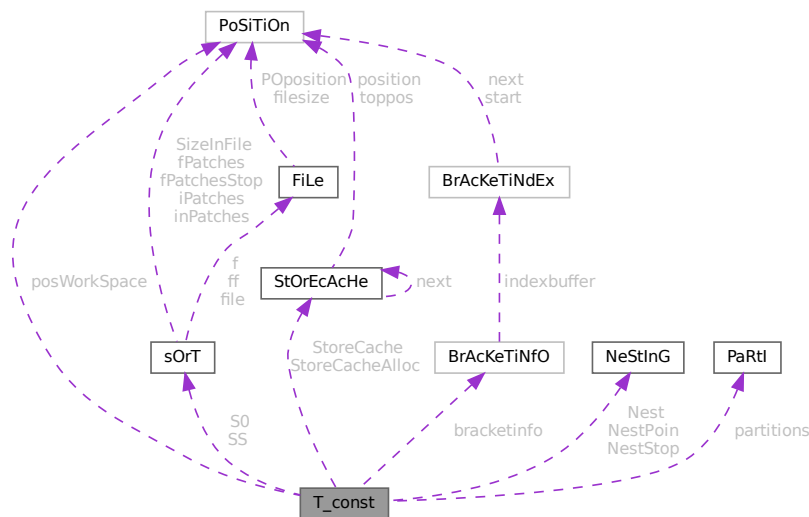

Data Fields

- `SORTING * S0`
- `SORTING * SS`
- `NESTING Nest`
- `NESTING NestStop`
- `NESTING NestPoin`
- `WORD * BrackBuf`
- `STORECACHE StoreCache`
- `STORECACHE StoreCacheAlloc`
- `WORD ** pWorkspace`
- `LONG * lWorkspace`
- `POSITION * posWorkspace`
- `WORD * Workspace`
- `WORD * WorkTop`
- `WORD * WorkPointer`
- `int * RepCount`
- `int * RepTop`
- `WORD * WildArgTaken`
- `UWORD * factorials`
- `WORD * small_power_n`
- `UWORD ** small_power`
- `UWORD * bernoullis`
- `WORD * primelist`
- `LONG * pfac`
- `LONG * pBer`
- `WORD * TMaddr`

- WORD * WildMask
- WORD * previousEfactor
- WORD ** TermMemHeap
- UWORD ** NumberMemHeap
- UWORD ** CacheNumberMemHeap
- BRACKETINFO * bracketinfo
- WORD ** ListPoly
- WORD * ListSymbols
- UWORD * NumMem
- WORD * TopologiesTerm
- WORD * TopologiesStart
- PARTI partitions
- LONG sBer
- LONG pWorkPointer
- LONG IWorkPointer
- LONG posWorkPointer
- LONG lnNumMem
- int sfact
- int mfac
- int ebufnum
- int fbufnum
- int allbufnum
- int aebufnum
- int idallflag
- int idallnum
- int idallmaxnum
- int WildcardBufferSize
- int TermMemMax
- int TermMemTop
- int NumberMemMax
- int NumberMemTop
- int CacheNumberMemMax
- int CacheNumberMemTop
- int bracketindexflag
- int optentimes
- int ListSymbolsSize
- int NumListSymbols
- int numpoly
- int LeaveNegative
- int TrimPower
- WORD small_power_maxx
- WORD small_power_maxn
- WORD dummysubexp [SUBEXPSIZE+4]
- WORD comsym [8]
- WORD comnum [4]
- WORD comfun [FUNHEAD+4]
- WORD comind [7]
- WORD MinVecArg [7+ARGHEAD]
- WORD FunArg [4+ARGHEAD+FUNHEAD]
- WORD locwildvalue [SUBEXPSIZE]
- WORD mulpat [SUBEXPSIZE+5]
- WORD proexp [SUBEXPSIZE+5]
- WORD TMout [40]
- WORD TMbuff
- WORD TMdolfac

- WORD [nfac](#)
- WORD [nBer](#)
- WORD [mBer](#)
- WORD [PolyAct](#)
- WORD [RecFlag](#)
- WORD [inprimelist](#)
- WORD [sizeprimelist](#)
- WORD [fromindex](#)
- WORD [setinterntopo](#)
- WORD [setexterntopo](#)
- WORD [TopologiesLevel](#)
- WORD [TopologiesOptions](#) [2]

3.140.1 Detailed Description

The [T_const](#) struct is part of the global data and resides either in the ALLGLOBALS struct A, or the ALLPRIVATEs struct B (TFORM) under the name T We see it used with the macro AT as in AT.WorkPointer It has variables that are private to each thread, most of which have to be defined at startup.

Definition at line [2035](#) of file [structs.h](#).

3.140.2 Field Documentation

3.140.2.1 S0

```
SORTING* T_const::S0
```

Definition at line [2039](#) of file [structs.h](#).

3.140.2.2 SS

```
SORTING* T_const::SS
```

Definition at line [2040](#) of file [structs.h](#).

3.140.2.3 Nest

```
NESTING T_const::Nest
```

Definition at line [2041](#) of file [structs.h](#).

3.140.2.4 NestStop

```
NESTING T_const::NestStop
```

Definition at line [2042](#) of file [structs.h](#).

3.140.2.5 NestPoin

`NESTING T_const::NestPoin`

Definition at line 2043 of file [structs.h](#).

3.140.2.6 BrackBuf

`WORD* T_const::BrackBuf`

Definition at line 2044 of file [structs.h](#).

3.140.2.7 StoreCache

`STORECACHE T_const::StoreCache`

Definition at line 2045 of file [structs.h](#).

3.140.2.8 StoreCacheAlloc

`STORECACHE T_const::StoreCacheAlloc`

Definition at line 2046 of file [structs.h](#).

3.140.2.9 pWorkSpace

`WORD** T_const::pWorkSpace`

Definition at line 2047 of file [structs.h](#).

3.140.2.10 lWorkSpace

`LONG* T_const::lWorkSpace`

Definition at line 2048 of file [structs.h](#).

3.140.2.11 posWorkSpace

`POSITION* T_const::posWorkSpace`

Definition at line 2049 of file [structs.h](#).

3.140.2.12 WorkSpace

`WORD* T_const::WorkSpace`

Definition at line 2050 of file [structs.h](#).

3.140.2.13 WorkTop

WORD* T_const::WorkTop

Definition at line 2051 of file [structs.h](#).

3.140.2.14 WorkPointer

WORD* T_const::WorkPointer

Definition at line 2052 of file [structs.h](#).

3.140.2.15 RepCount

int* T_const::RepCount

Definition at line 2053 of file [structs.h](#).

3.140.2.16 RepTop

int* T_const::RepTop

Definition at line 2054 of file [structs.h](#).

3.140.2.17 WildArgTaken

WORD* T_const::WildArgTaken

Definition at line 2055 of file [structs.h](#).

3.140.2.18 factorials

UWORD* T_const::factorials

Definition at line 2056 of file [structs.h](#).

3.140.2.19 small_power_n

WORD* T_const::small_power_n

Definition at line 2057 of file [structs.h](#).

3.140.2.20 small_power

UWORD** T_const::small_power

Definition at line 2058 of file [structs.h](#).

3.140.2.21 bernoullis

UWORD* T_const::bernoullis

Definition at line 2059 of file [structs.h](#).

3.140.2.22 primelist

WORD* T_const::primelist

Definition at line 2060 of file [structs.h](#).

3.140.2.23 pfac

LONG* T_const::pfac

Definition at line 2061 of file [structs.h](#).

3.140.2.24 pBer

LONG* T_const::pBer

Definition at line 2062 of file [structs.h](#).

3.140.2.25 TMaddr

WORD* T_const::TMaddr

Definition at line 2063 of file [structs.h](#).

3.140.2.26 WildMask

WORD* T_const::WildMask

Definition at line 2064 of file [structs.h](#).

3.140.2.27 previousEfactor

WORD* T_const::previousEfactor

Definition at line 2065 of file [structs.h](#).

3.140.2.28 TermMemHeap

WORD** T_const::TermMemHeap

Definition at line 2066 of file [structs.h](#).

3.140.2.29 NumberMemHeap

UWORD** T_const::NumberMemHeap

Definition at line 2067 of file [structs.h](#).

3.140.2.30 CacheNumberMemHeap

UWORD** T_const::CacheNumberMemHeap

Definition at line 2068 of file [structs.h](#).

3.140.2.31 bracketinfo

BRACKETINFO* T_const::bracketinfo

Definition at line 2069 of file [structs.h](#).

3.140.2.32 ListPoly

WORD** T_const::ListPoly

Definition at line 2070 of file [structs.h](#).

3.140.2.33 ListSymbols

WORD* T_const::ListSymbols

Definition at line 2071 of file [structs.h](#).

3.140.2.34 NumMem

UWORD* T_const::NumMem

Definition at line 2072 of file [structs.h](#).

3.140.2.35 TopologiesTerm

WORD* T_const::TopologiesTerm

Definition at line 2073 of file [structs.h](#).

3.140.2.36 TopologiesStart

WORD* T_const::TopologiesStart

Definition at line 2074 of file [structs.h](#).

3.140.2.37 partitions

`PARTI T_const::partitions`

Definition at line 2083 of file [structs.h](#).

3.140.2.38 sBer

`LONG T_const::sBer`

Definition at line 2084 of file [structs.h](#).

3.140.2.39 pWorkPointer

`LONG T_const::pWorkPointer`

Definition at line 2085 of file [structs.h](#).

3.140.2.40 lWorkPointer

`LONG T_const::lWorkPointer`

Definition at line 2086 of file [structs.h](#).

3.140.2.41 posWorkPointer

`LONG T_const::posWorkPointer`

Definition at line 2087 of file [structs.h](#).

3.140.2.42 InNumMem

`LONG T_const::InNumMem`

Definition at line 2088 of file [structs.h](#).

3.140.2.43 sfact

`int T_const::sfact`

Definition at line 2089 of file [structs.h](#).

3.140.2.44 mfac

`int T_const::mfac`

Definition at line 2090 of file [structs.h](#).

3.140.2.45 ebufnum

```
int T_const::ebufnum
```

Definition at line 2091 of file [structs.h](#).

3.140.2.46 fbufnum

```
int T_const::fbufnum
```

Definition at line 2092 of file [structs.h](#).

3.140.2.47 allbufnum

```
int T_const::allbufnum
```

Definition at line 2093 of file [structs.h](#).

3.140.2.48 aebufnum

```
int T_const::aebufnum
```

Definition at line 2094 of file [structs.h](#).

3.140.2.49 idallflag

```
int T_const::idallflag
```

Definition at line 2095 of file [structs.h](#).

3.140.2.50 idallnum

```
int T_const::idallnum
```

Definition at line 2096 of file [structs.h](#).

3.140.2.51 idallmaxnum

```
int T_const::idallmaxnum
```

Definition at line 2097 of file [structs.h](#).

3.140.2.52 WildcardBufferSize

```
int T_const::WildcardBufferSize
```

Definition at line 2098 of file [structs.h](#).

3.140.2.53 TermMemMax

```
int T_const::TermMemMax
```

Definition at line 2107 of file [structs.h](#).

3.140.2.54 TermMemTop

```
int T_const::TermMemTop
```

Definition at line 2108 of file [structs.h](#).

3.140.2.55 NumberMemMax

```
int T_const::NumberMemMax
```

Definition at line 2109 of file [structs.h](#).

3.140.2.56 NumberMemTop

```
int T_const::NumberMemTop
```

Definition at line 2110 of file [structs.h](#).

3.140.2.57 CacheNumberMemMax

```
int T_const::CacheNumberMemMax
```

Definition at line 2111 of file [structs.h](#).

3.140.2.58 CacheNumberMemTop

```
int T_const::CacheNumberMemTop
```

Definition at line 2112 of file [structs.h](#).

3.140.2.59 bracketindexflag

```
int T_const::bracketindexflag
```

Definition at line 2113 of file [structs.h](#).

3.140.2.60 optimitimes

```
int T_const::optimitimes
```

Definition at line 2114 of file [structs.h](#).

3.140.2.61 ListSymbolsSize

```
int T_const::ListSymbolsSize
```

Definition at line 2115 of file [structs.h](#).

3.140.2.62 NumListSymbols

```
int T_const::NumListSymbols
```

Definition at line 2116 of file [structs.h](#).

3.140.2.63 numpoly

```
int T_const::numpoly
```

Definition at line 2117 of file [structs.h](#).

3.140.2.64 LeaveNegative

```
int T_const::LeaveNegative
```

Definition at line 2118 of file [structs.h](#).

3.140.2.65 TrimPower

```
int T_const::TrimPower
```

Definition at line 2119 of file [structs.h](#).

3.140.2.66 small_power_maxx

```
WORD T_const::small_power_maxx
```

Definition at line 2120 of file [structs.h](#).

3.140.2.67 small_power_maxn

```
WORD T_const::small_power_maxn
```

Definition at line 2121 of file [structs.h](#).

3.140.2.68 dummysubexp

```
WORD T_const::dummysubexp[SUBEXPSIZE+4]
```

Definition at line 2122 of file [structs.h](#).

3.140.2.69 comsym

```
WORD T_const::comsym[8]
```

Definition at line 2123 of file [structs.h](#).

3.140.2.70 comnum

```
WORD T_const::comnum[4]
```

Definition at line 2124 of file [structs.h](#).

3.140.2.71 comfun

```
WORD T_const::comfun[FUNHEAD+4]
```

Definition at line 2125 of file [structs.h](#).

3.140.2.72 comind

```
WORD T_const::comind[7]
```

Definition at line 2127 of file [structs.h](#).

3.140.2.73 MinVecArg

```
WORD T_const::MinVecArg[7+ARGHEAD]
```

Definition at line 2128 of file [structs.h](#).

3.140.2.74 FunArg

```
WORD T_const::FunArg[4+ARGHEAD+FUNHEAD]
```

Definition at line 2129 of file [structs.h](#).

3.140.2.75 locwildvalue

```
WORD T_const::locwildvalue[SUBEXPSIZE]
```

Definition at line 2130 of file [structs.h](#).

3.140.2.76 mulpat

```
WORD T_const::mulpat[SUBEXPSIZE+5]
```

Definition at line 2131 of file [structs.h](#).

3.140.2.77 proexp

WORD T_const::proexp[SUBEXPSIZE+5]

Definition at line 2133 of file [structs.h](#).

3.140.2.78 TMout

WORD T_const::TMout[40]

Definition at line 2134 of file [structs.h](#).

3.140.2.79 TMbuff

WORD T_const::TMbuff

Definition at line 2135 of file [structs.h](#).

3.140.2.80 TMdolfac

WORD T_const::TMdolfac

Definition at line 2136 of file [structs.h](#).

3.140.2.81 nfac

WORD T_const::nfac

Definition at line 2137 of file [structs.h](#).

3.140.2.82 nBer

WORD T_const::nBer

Definition at line 2138 of file [structs.h](#).

3.140.2.83 mBer

WORD T_const::mBer

Definition at line 2139 of file [structs.h](#).

3.140.2.84 PolyAct

WORD T_const::PolyAct

Definition at line 2140 of file [structs.h](#).

3.140.2.85 RecFlag

WORD T_const::RecFlag

Definition at line [2141](#) of file [structs.h](#).

3.140.2.86 inprimelist

WORD T_const::inprimelist

Definition at line [2142](#) of file [structs.h](#).

3.140.2.87 sizeprimelist

WORD T_const::sizeprimelist

Definition at line [2143](#) of file [structs.h](#).

3.140.2.88 fromindex

WORD T_const::fromindex

Definition at line [2144](#) of file [structs.h](#).

3.140.2.89 setinterntopo

WORD T_const::setinterntopo

Definition at line [2145](#) of file [structs.h](#).

3.140.2.90 setexterntopo

WORD T_const::setexterntopo

Definition at line [2146](#) of file [structs.h](#).

3.140.2.91 TopologiesLevel

WORD T_const::TopologiesLevel

Definition at line [2147](#) of file [structs.h](#).

3.140.2.92 TopologiesOptions

WORD T_const::TopologiesOptions[2]

Definition at line 2148 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.141 T_EEdge Class Reference

Data Fields

- int [nodes](#) [2]
- int [ext](#)
- int [momn](#)
- char [momc](#) [2]
- char [padding](#) [6]

3.141.1 Detailed Description

Definition at line 24 of file [gentopo.h](#).

3.141.2 Field Documentation

3.141.2.1 nodes

int T_EEdge::nodes[2]

Definition at line 26 of file [gentopo.h](#).

3.141.2.2 ext

int T_EEdge::ext

Definition at line 27 of file [gentopo.h](#).

3.141.2.3 momn

int T_EEdge::momn

Definition at line 28 of file [gentopo.h](#).

3.141.2.4 momc

```
char T_EEdge::momc[2]
```

Definition at line 29 of file [gentopo.h](#).

3.141.2.5 padding

```
char T_EEdge::padding[6]
```


Definition at line 31 of file [gentopo.h](#).

The documentation for this class was generated from the following file:

- [gentopo.h](#)

3.142 T_EGraph Class Reference

Collaboration diagram for T_EGraph:

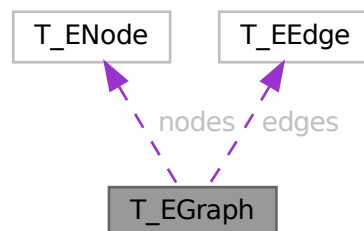

Public Member Functions

- [T_EGraph](#) (int nnodes, int nedges, int mxdeg)
- void [print](#) (void)
- void [init](#) (int pid, long gid, int **adjmat, int sopi, BigInt nsym, BigInt esym)
- void [setExtern](#) (int nd, int val)
- void [endSetExtern](#) (void)

Data Fields

- long [gld](#)
- int [pld](#)
- int [nNodes](#)
- int [nEdges](#)
- int [maxdeg](#)
- int [nExtern](#)
- int [opi](#)
- BigInt [nsym](#)
- BigInt [esym](#)
- [T_ENode](#) * [nodes](#)
- [T_EEdge](#) * [edges](#)

3.142.1 Detailed Description

Definition at line [34](#) of file [gentopo.h](#).

3.142.2 Constructor & Destructor Documentation

3.142.2.1 T_EGraph()

```
T_EGraph::T_EGraph (
    int nnodes,
    int nedges,
    int mxdeg )
```

Definition at line [88](#) of file [gentopo.cc](#).

3.142.2.2 ~T_EGraph()

```
T_EGraph::~T_EGraph ( )
```

Definition at line [109](#) of file [gentopo.cc](#).

3.142.3 Member Function Documentation

3.142.3.1 print()

```
void T_EGraph::print (
    void )
```

Definition at line [200](#) of file [gentopo.cc](#).

3.142.3.2 `init()`

```
void T_EGraph::init (
    int pid,
    long gid,
    int ** adjmat,
    int sopi,
    BigInt nsym,
    BigInt esym )
```

Definition at line 124 of file [gentopo.cc](#).

3.142.3.3 `setExtern()`

```
void T_EGraph::setExtern (
    int nd,
    int val )
```

Definition at line 181 of file [gentopo.cc](#).

3.142.3.4 `endSetExtern()`

```
void T_EGraph::endSetExtern (
    void )
```

Definition at line 187 of file [gentopo.cc](#).

3.142.4 Field Documentation

3.142.4.1 `gId`

```
long T_EGraph::gId
```

Definition at line 36 of file [gentopo.h](#).

3.142.4.2 `pId`

```
int T_EGraph::pId
```

Definition at line 37 of file [gentopo.h](#).

3.142.4.3 `nNodes`

```
int T_EGraph::nNodes
```

Definition at line 38 of file [gentopo.h](#).

3.142.4.4 nEdges

```
int T_EGraph::nEdges
```

Definition at line 39 of file [gentopo.h](#).

3.142.4.5 maxdeg

```
int T_EGraph::maxdeg
```

Definition at line 40 of file [gentopo.h](#).

3.142.4.6 nExtern

```
int T_EGraph::nExtern
```

Definition at line 41 of file [gentopo.h](#).

3.142.4.7 opi

```
int T_EGraph::opi
```

Definition at line 43 of file [gentopo.h](#).

3.142.4.8 nsym

```
BigInt T_EGraph::nsym
```

Definition at line 44 of file [gentopo.h](#).

3.142.4.9 esym

```
BigInt T_EGraph::esym
```

Definition at line 44 of file [gentopo.h](#).

3.142.4.10 nodes

```
T\_ENode\* T_EGraph::nodes
```

Definition at line 46 of file [gentopo.h](#).

3.142.4.11 edges

`T_EEdge* T_EGraph::edges`

Definition at line 47 of file [gentopo.h](#).

The documentation for this class was generated from the following files:

- [gentopo.h](#)
- [gentopo.cc](#)

3.143 T_ENode Class Reference

Data Fields

- int [deg](#)
- int [ext](#)
- int * [edges](#)

3.143.1 Detailed Description

Definition at line 17 of file [gentopo.h](#).

3.143.2 Field Documentation

3.143.2.1 deg

`int T_ENode::deg`

Definition at line 19 of file [gentopo.h](#).

3.143.2.2 ext

`int T_ENode::ext`

Definition at line 20 of file [gentopo.h](#).

3.143.2.3 edges

`int* T_ENode::edges`


Definition at line 21 of file [gentopo.h](#).

The documentation for this class was generated from the following file:

- [gentopo.h](#)

3.144 T_MGraph Class Reference

Collaboration diagram for T_MGraph:

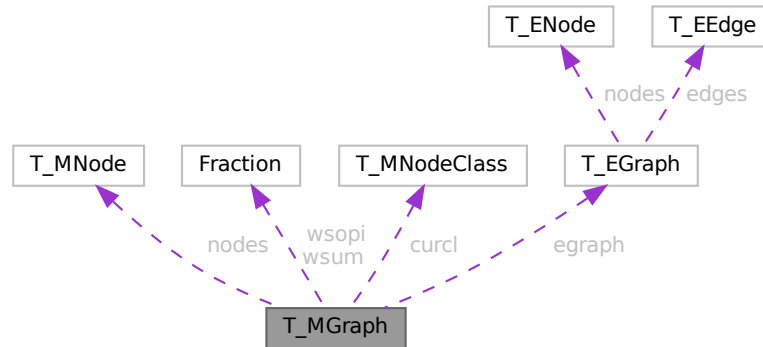

Public Member Functions

- [T_MGraph](#) (int pid, int ncl, int *cldeg, int *clnum, int *clex, int sopi)
- long [generate](#) (void)

Data Fields

- int [pld](#)
- int [nNodes](#)
- int [nEdges](#)
- int [nLoops](#)
- [T_MNode](#) ** [nodes](#)
- int * [clist](#)
- int [nClasses](#)
- int [mindeg](#)
- int [maxdeg](#)
- int [selOPI](#)
- long [ndiag](#)
- long [n1PI](#)
- int [nBridges](#)
- int [c1PI](#)
- int ** [adjMat](#)
- BigInt [nsym](#)
- BigInt [esym](#)
- [Fraction](#) [wsum](#)
- [Fraction](#) [wsopi](#)
- [T_MNodeClass](#) * [curcl](#)
- [T_EGraph](#) * [egraph](#)
- long [ngen](#)
- long [ngconn](#)
- long [nCallRefine](#)
- long [discardOrd](#)
- long [discardRefine](#)
- long [discardDisc](#)
- long [discardIso](#)

3.144.1 Detailed Description

Definition at line 84 of file [gentopo.h](#).

3.144.2 Constructor & Destructor Documentation

3.144.2.1 T_MGraph()

```
T_MGraph::T_MGraph (
    int pid,
    int ncl,
    int * cldeg,
    int * clnum,
    int * clext,
    int sopi )
```

Definition at line 473 of file [gentopo.cc](#).

3.144.2.2 ~T_MGraph()

```
T_MGraph::~T_MGraph ( )
```

Definition at line 572 of file [gentopo.cc](#).

3.144.3 Member Function Documentation

3.144.3.1 generate()

```
long T_MGraph::generate (
    void )
```

Definition at line 911 of file [gentopo.cc](#).

3.144.4 Field Documentation

3.144.4.1 pld

```
int T_MGraph::pId
```

Definition at line 89 of file [gentopo.h](#).

3.144.4.2 nNodes

```
int T_MGraph::nNodes
```

Definition at line 90 of file [gentopo.h](#).

3.144.4.3 nEdges

```
int T_MGraph::nEdges
```

Definition at line 91 of file [gentopo.h](#).

3.144.4.4 nLoops

```
int T_MGraph::nLoops
```

Definition at line 92 of file [gentopo.h](#).

3.144.4.5 nodes

```
T_MNode** T_MGraph::nodes
```

Definition at line 93 of file [gentopo.h](#).

3.144.4.6 clist

```
int* T_MGraph::clist
```

Definition at line 94 of file [gentopo.h](#).

3.144.4.7 nClasses

```
int T_MGraph::nClasses
```

Definition at line 95 of file [gentopo.h](#).

3.144.4.8 mindeg

```
int T_MGraph::mindeg
```

Definition at line 97 of file [gentopo.h](#).

3.144.4.9 maxdeg

```
int T_MGraph::maxdeg
```

Definition at line 98 of file [gentopo.h](#).

3.144.4.10 selOPI

```
int T_MGraph::selOPI
```

Definition at line 100 of file [gentopo.h](#).

3.144.4.11 ndiag

```
long T_MGraph::ndiag
```

Definition at line 103 of file [gentopo.h](#).

3.144.4.12 n1PI

```
long T_MGraph::n1PI
```

Definition at line 104 of file [gentopo.h](#).

3.144.4.13 nBridges

```
int T_MGraph::nBridges
```

Definition at line 105 of file [gentopo.h](#).

3.144.4.14 c1PI

```
int T_MGraph::c1PI
```

Definition at line 108 of file [gentopo.h](#).

3.144.4.15 adjMat

```
int** T_MGraph::adjMat
```

Definition at line 109 of file [gentopo.h](#).

3.144.4.16 nsym

```
BigInt T_MGraph::nsym
```

Definition at line 110 of file [gentopo.h](#).

3.144.4.17 esym

```
BigInt T_MGraph::esym
```

Definition at line 111 of file [gentopo.h](#).

3.144.4.18 wsum

```
Fraction T_MGraph::wsum
```

Definition at line 112 of file [gentopo.h](#).

3.144.4.19 wsopi

`Fraction T_MGraph::wsopi`

Definition at line 113 of file [gentopo.h](#).

3.144.4.20 curcl

`T_MNodeClass* T_MGraph::curcl`

Definition at line 114 of file [gentopo.h](#).

3.144.4.21 egraph

`T_EGraph* T_MGraph::egraph`

Definition at line 115 of file [gentopo.h](#).

3.144.4.22 ngen

`long T_MGraph::ngen`

Definition at line 118 of file [gentopo.h](#).

3.144.4.23 ngconn

`long T_MGraph::ngconn`

Definition at line 119 of file [gentopo.h](#).

3.144.4.24 nCallRefine

`long T_MGraph::nCallRefine`

Definition at line 121 of file [gentopo.h](#).

3.144.4.25 discardOrd

`long T_MGraph::discardOrd`

Definition at line 122 of file [gentopo.h](#).

3.144.4.26 discardRefine

`long T_MGraph::discardRefine`

Definition at line 123 of file [gentopo.h](#).

3.144.4.27 discardDisc

```
long T_MGraph::discardDisc
```

Definition at line 124 of file [gentopo.h](#).

3.144.4.28 discardIso

```
long T_MGraph::discardIso
```

Definition at line 125 of file [gentopo.h](#).

The documentation for this class was generated from the following files:

- [gentopo.h](#)
- [gentopo.cc](#)

3.145 T_MNode Class Reference

Public Member Functions

- [T_MNode](#) (int id, int deg, int ext, int cls)

Data Fields

- int [id](#)
- int [deg](#)
- int [cls](#)
- int [ext](#)
- int [freelg](#)
- int [visited](#)

3.145.1 Detailed Description

Definition at line 61 of file [gentopo.h](#).

3.145.2 Constructor & Destructor Documentation

3.145.2.1 T_MNode()

```
T_MNode::T_MNode (
    int id,
    int deg,
    int ext,
    int cls )
```

Definition at line 237 of file [gentopo.cc](#).

3.145.3 Field Documentation

3.145.3.1 id

```
int T_MNode::id
```

Definition at line 63 of file [gentopo.h](#).

3.145.3.2 deg

```
int T_MNode::deg
```

Definition at line 64 of file [gentopo.h](#).

3.145.3.3 clss

```
int T_MNode::clss
```

Definition at line 65 of file [gentopo.h](#).

3.145.3.4 ext

```
int T_MNode::ext
```

Definition at line 66 of file [gentopo.h](#).

3.145.3.5 freelg

```
int T_MNode::freelg
```

Definition at line 68 of file [gentopo.h](#).

3.145.3.6 visited

```
int T_MNode::visited
```

Definition at line 69 of file [gentopo.h](#).

The documentation for this class was generated from the following files:

- [gentopo.h](#)
- [gentopo.cc](#)

3.146 T_MNodeClass Class Reference

Public Member Functions

- [T_MNodeClass](#) (int nnodes, int ncl)
- void [init](#) (int *cl, int mxdeg, int **adjmat)
- void [copy](#) ([T_MNodeClass](#) *mnc)
- int [clCmp](#) (int nd0, int nd1, int cn)
- void [printMat](#) (void)
- void [mkFlist](#) (void)
- void [mkNdCl](#) (void)
- void [mkClMat](#) (int **adjmat)
- void [incMat](#) (int nd, int td, int val)
- Bool [chkOrd](#) (int nd, int ndc, [T_MNodeClass](#) *cl, int *dtcl)
- int [cmpArray](#) (int *a0, int *a1, int ma)

Data Fields

- int [nNodes](#)
- int [nClasses](#)
- int * [clist](#)
- int * [ndcl](#)
- int ** [clmat](#)
- int * [flist](#)
- int [maxdeg](#)
- int [foralignment](#)

3.146.1 Detailed Description

Definition at line 249 of file [gentopo.cc](#).

3.146.2 Constructor & Destructor Documentation

3.146.2.1 T_MNodeClass()

```
T_MNodeClass::T_MNodeClass (
    int nnodes,
    int ncl )
```

Definition at line 275 of file [gentopo.cc](#).

3.146.2.2 ~T_MNodeClass()

```
T_MNodeClass::~T_MNodeClass ( )
```

Definition at line 290 of file [gentopo.cc](#).

3.146.3 Member Function Documentation

3.146.3.1 init()

```
void T_MNodeClass::init (
    int * cl,
    int mxdeg,
    int ** adjmat )
```

Definition at line 302 of file [gentopo.cc](#).

3.146.3.2 copy()

```
void T_MNodeClass::copy (
    T_MNodeClass * mnc )
```

Definition at line 315 of file [gentopo.cc](#).

3.146.3.3 clCmp()

```
int T_MNodeClass::clCmp (
    int nd0,
    int nd1,
    int cn )
```

Definition at line 364 of file [gentopo.cc](#).

3.146.3.4 printMat()

```
void T_MNodeClass::printMat (
    void )
```

Definition at line 435 of file [gentopo.cc](#).

3.146.3.5 mkFlist()

```
void T_MNodeClass::mkFlist (
    void )
```

Definition at line 336 of file [gentopo.cc](#).

3.146.3.6 mkNdCl()

```
void T_MNodeClass::mkNdCl (
    void )
```

Definition at line 350 of file [gentopo.cc](#).

3.146.3.7 mkClMat()

```
void T_MNodeClass::mkClMat (
    int ** adjmat )
```

Definition at line [384](#) of file [gentopo.cc](#).

3.146.3.8 incMat()

```
void T_MNodeClass::incMat (
    int nd,
    int td,
    int val )
```

Definition at line [398](#) of file [gentopo.cc](#).

3.146.3.9 chkOrd()

```
Bool T_MNodeClass::chkOrd (
    int nd,
    int ndc,
    T_MNodeClass * cl,
    int * dtcl )
```

Definition at line [405](#) of file [gentopo.cc](#).

3.146.3.10 cmpArray()

```
int T_MNodeClass::cmpArray (
    int * a0,
    int * a1,
    int ma )
```

Definition at line [458](#) of file [gentopo.cc](#).

3.146.4 Field Documentation

3.146.4.1 nNodes

```
int T_MNodeClass::nNodes
```

Definition at line [251](#) of file [gentopo.cc](#).

3.146.4.2 nClasses

```
int T_MNodeClass::nClasses
```

Definition at line [252](#) of file [gentopo.cc](#).

3.146.4.3 clist

```
int* T_MNodeClass::clist
```

Definition at line 253 of file [gentopo.cc](#).

3.146.4.4 ndcl

```
int* T_MNodeClass::ndcl
```

Definition at line 254 of file [gentopo.cc](#).

3.146.4.5 clmat

```
int** T_MNodeClass::clmat
```

Definition at line 255 of file [gentopo.cc](#).

3.146.4.6 flist

```
int* T_MNodeClass::flist
```

Definition at line 256 of file [gentopo.cc](#).

3.146.4.7 maxdeg

```
int T_MNodeClass::maxdeg
```

Definition at line 257 of file [gentopo.cc](#).

3.146.4.8 forallignment

```
int T_MNodeClass::forallignment
```


Definition at line 258 of file [gentopo.cc](#).

The documentation for this class was generated from the following file:

- [gentopo.cc](#)

3.147 TaBIeBaSE Struct Reference

Collaboration diagram for TaBIeBaSE:

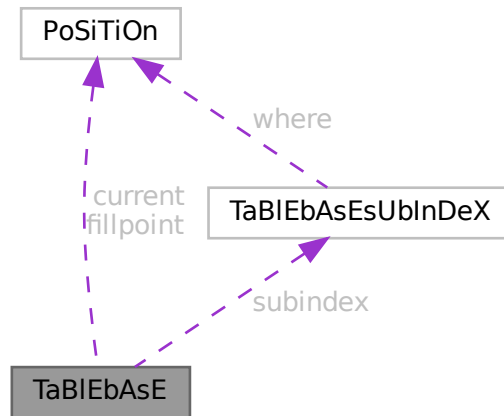

Data Fields

- [POSITION](#) fillpoint
- [POSITION](#) current
- [UBYTE](#) * name
- [int](#) * tablenumbers
- [TABLEBASESUBINDEX](#) * subindex
- [int](#) numtables

3.147.1 Detailed Description

Definition at line 594 of file [structs.h](#).

3.147.2 Field Documentation

3.147.2.1 fillpoint

[POSITION](#) TaBIeBaSE::fillpoint

Definition at line 595 of file [structs.h](#).

3.147.2.2 current

[POSITION](#) TaBIeBaSE::current

Definition at line 596 of file [structs.h](#).

3.147.2.3 name

```
UBYTE* TaBlEbAsE::name
```

Definition at line 597 of file [structs.h](#).

3.147.2.4 tablenumbers

```
int* TaBlEbAsE::tablenumbers
```

Definition at line 598 of file [structs.h](#).

3.147.2.5 subindex

```
TABLEBASESUBINDEX* TaBlEbAsE::subindex
```

Definition at line 599 of file [structs.h](#).

3.147.2.6 numtables

```
int TaBlEbAsE::numtables
```


Definition at line 600 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.148 TaBlEbAsEsUbInDeX Struct Reference

Collaboration diagram for TaBlEbAsEsUbInDeX:



Data Fields

- [POSITION](#) where
- [LONG](#) size

3.148.1 Detailed Description

Definition at line [585](#) of file [structs.h](#).

3.148.2 Field Documentation

3.148.2.1 where

[POSITION](#) TaBlEbAsEsUbInDeX::where

Definition at line [586](#) of file [structs.h](#).

3.148.2.2 size

[LONG](#) TaBlEbAsEsUbInDeX::size

Definition at line [587](#) of file [structs.h](#).


The documentation for this struct was generated from the following file:

- [structs.h](#)

3.149 TaBlEs Struct Reference

```
#include <structs.h>
```

Collaboration diagram for TaBlEs:

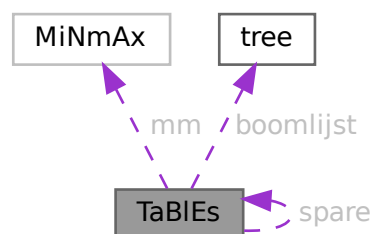

Data Fields

- WORD * [tablepointers](#)
- WORD * [prototype](#)
- WORD * [pattern](#)
- MINMAX * [mm](#)
- WORD * [flags](#)
- COMPTREE * [boomlijst](#)
- UBYTE * [argtail](#)
- struct TaBIEs * [spare](#)
- WORD * [buffers](#)
- LONG [totind](#)
- LONG [reserved](#)
- LONG [defined](#)
- LONG [mdefined](#)
- int [prototypeSize](#)
- int [numind](#)
- int [bounds](#)
- int [strict](#)
- int [sparse](#)
- int [numtree](#)
- int [rootnum](#)
- int [MaxTreeSize](#)
- WORD [bufnum](#)
- WORD [bufferssize](#)
- WORD [buffersfill](#)
- WORD [tablenum](#)
- WORD [mode](#)
- WORD [numdummies](#)

3.149.1 Detailed Description

[buffers](#), [mm](#), [flags](#), and [prototype](#) are always dynamically allocated, [tablepointers](#) only if needed (=0 if unallocated), [boomlijst](#) and [argtail](#) only for sparse tables.

Allocation is done for both the normal and the stub instance ([spare](#)), except for [prototype](#) and [argtail](#) which share memory.

Definition at line [342](#) of file [structs.h](#).

3.149.2 Field Documentation

3.149.2.1 [tablepointers](#)

```
WORD* TaBIEs::tablepointers
```

[D] Start in [tablepointers](#) table.

Definition at line [343](#) of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.2 prototype

WORD* TaBles::prototype

[D] The wildcard prototyping for arguments

Definition at line 348 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.3 pattern

WORD* TaBles::pattern

The pattern with which to match the arguments

Definition at line 349 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.4 mm

MINMAX* TaBles::mm

[D] Array bounds, dimension by dimension. # elements = numind.

Definition at line 351 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.5 flags

WORD* TaBles::flags

[D] Is element in use ? etc. # elements = numind.

Definition at line 352 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.6 boomlijst

COMPTREE* TaBles::boomlijst

[D] Tree for searching in sparse tables

Definition at line 353 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.7 argtail

```
UBYTE* TaBlEs::argtail
```

[D] The arguments in characters. Starts for tablebase with parenthesis to indicate tail

Definition at line 354 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.8 spare

```
struct TaBlEs* TaBlEs::spare
```

[D] For tablebase. Alternatingly stubs and real

Definition at line 356 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.9 buffers

```
WORD* TaBlEs::buffers
```

[D] When we use more than one compiler buffer.

Definition at line 357 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), and [DoRecovery\(\)](#).

3.149.2.10 totind

```
LONG TaBlEs::totind
```

Total number requested

Definition at line 358 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.11 reserved

```
LONG TaBlEs::reserved
```

Total reservation in tablepointers for sparse

Definition at line 359 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.12 defined

```
LONG TaBles::defined
```

Number of table elements that are defined

Definition at line 360 of file [structs.h](#).

3.149.2.13 mdefined

```
LONG TaBles::mdefined
```

Same as defined but after .global

Definition at line 361 of file [structs.h](#).

3.149.2.14 prototypeSize

```
int TaBles::prototypeSize
```

Size of allocated memory for prototype in bytes.

Definition at line 362 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.15 numind

```
int TaBles::numind
```

Number of array indices

Definition at line 363 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.16 bounds

```
int TaBles::bounds
```

Array bounds check on/off.

Definition at line 364 of file [structs.h](#).

3.149.2.17 strict

```
int TaBles::strict
```

>0: all must be defined. <0: undefined not substitute

Definition at line 365 of file [structs.h](#).

3.149.2.18 sparse

```
int TaBlEs::sparse
```

0 --> sparse table

Definition at line 366 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.19 numtree

```
int TaBlEs::numtree
```

For the tree for sparse tables

Definition at line 367 of file [structs.h](#).

3.149.2.20 rootnum

```
int TaBlEs::rootnum
```

For the tree for sparse tables

Definition at line 368 of file [structs.h](#).

3.149.2.21 MaxTreeSize

```
int TaBlEs::MaxTreeSize
```

For the tree for sparse tables

Definition at line 369 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.149.2.22 bufnum

```
WORD TaBlEs::bufnum
```

Each table potentially its own buffer

Definition at line 370 of file [structs.h](#).

Referenced by [AddRHS\(\)](#).

3.149.2.23 buffersize

WORD TABLES::buffersize

When we use more than one compiler buffer

Definition at line 371 of file [structs.h](#).

Referenced by [AddRHS\(\)](#), and [DoRecovery\(\)](#).

3.149.2.24 buffersfill

WORD TABLES::buffersfill

When we use more than one compiler buffer

Definition at line 372 of file [structs.h](#).

Referenced by [AddRHS\(\)](#).

3.149.2.25 tablenum

WORD TABLES::tablenum

For testing of tableuse

Definition at line 373 of file [structs.h](#).

3.149.2.26 mode

WORD TABLES::mode

0: normal, 1: stub

Definition at line 374 of file [structs.h](#).

3.149.2.27 numdummies

WORD TABLES::numdummies

Definition at line 375 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.150 TERMINFO Struct Reference

Data Fields

- WORD * [term](#)
- void * [currentModel](#)
- void * [currentMODEL](#)
- WORD * [legcouple](#) [MAXLEGS+1]
- LONG [numtopo](#)
- LONG [numdia](#)
- WORD [diaoffset](#)
- WORD [level](#)
- WORD [externalset](#)
- WORD [internalset](#)
- WORD [numextern](#)
- WORD [flags](#)

3.150.1 Detailed Description

Definition at line [1361](#) of file [structs.h](#).

3.150.2 Field Documentation

3.150.2.1 term

```
WORD* TERMINFO::term
```

Definition at line [1362](#) of file [structs.h](#).

3.150.2.2 currentModel

```
void* TERMINFO::currentModel
```

Definition at line [1363](#) of file [structs.h](#).

3.150.2.3 currentMODEL

```
void* TERMINFO::currentMODEL
```

Definition at line [1364](#) of file [structs.h](#).

3.150.2.4 legcouple

```
WORD* TERMINFO::legcouple[MAXLEGS+1]
```

Definition at line [1365](#) of file [structs.h](#).

3.150.2.5 numtopo

LONG TERMINFO::numtopo

Definition at line 1366 of file [structs.h](#).

3.150.2.6 numdia

LONG TERMINFO::numdia

Definition at line 1367 of file [structs.h](#).

3.150.2.7 diaoffset

WORD TERMINFO::diaoffset

Definition at line 1368 of file [structs.h](#).

3.150.2.8 level

WORD TERMINFO::level

Definition at line 1369 of file [structs.h](#).

3.150.2.9 externalset

WORD TERMINFO::externalset

Definition at line 1370 of file [structs.h](#).

3.150.2.10 internalset

WORD TERMINFO::internalset

Definition at line 1371 of file [structs.h](#).

3.150.2.11 numextern

WORD TERMINFO::numextern

Definition at line 1372 of file [structs.h](#).

3.150.2.12 flags

WORD TERMINFO::flags


Definition at line 1373 of file structs.h.

The documentation for this struct was generated from the following file:

- `structs.h`

3.151 ToPoTyPe Struct Reference

Collaboration diagram for ToPoTyPe:

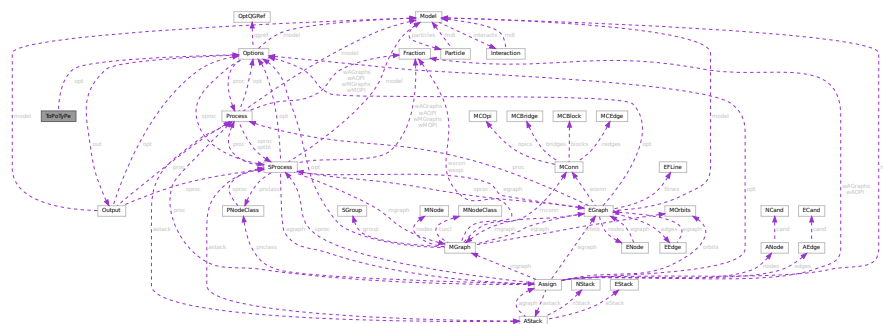

Data Fields

- WORD * **vert**
- WORD * **vertmax**
- Options * **opt**
- int **cldeg** [MAXPOINTS]
- int **clnum** [MAXPOINTS]
- int **clext** [MAXPOINTS]
- int **cmind** [MAXLEGS+1]
- int **cmaxd** [MAXLEGS+1]
- int **ncl**
- int **nvert**
- int **nloops**
- int **nlegs**
- int **npadding**
- WORD **nvert**
- WORD **sopi**

3.151.1 Detailed Description

Definition at line 42 of file diawrap.cc.

3.151.2 Field Documentation

3.151.2.1 vert

```
WORD * ToPoTyPe::vert
```

Definition at line 43 of file [diawrap.cc](#).

3.151.2.2 vertmax

```
WORD * ToPoTyPe::vertmax
```

Definition at line 44 of file [diawrap.cc](#).

3.151.2.3 opt

```
Options* ToPoTyPe::opt
```

Definition at line 45 of file [diawrap.cc](#).

3.151.2.4 cldeg

```
int ToPoTyPe::cldeg
```

Definition at line 46 of file [diawrap.cc](#).

3.151.2.5 clnum

```
int ToPoTyPe::clnum
```

Definition at line 46 of file [diawrap.cc](#).

3.151.2.6 clext

```
int ToPoTyPe::clext
```

Definition at line 46 of file [diawrap.cc](#).

3.151.2.7 cmind

```
int ToPoTyPe::cmind[MAXLEGS+1]
```

Definition at line 47 of file [diawrap.cc](#).

3.151.2.8 cmaxd

```
int ToPoTyPe::cmaxd[MAXLEGS+1]
```

Definition at line 47 of file [diawrap.cc](#).

3.151.2.9 ncl

```
int ToPoTyPe::ncl
```

Definition at line 48 of file [diawrap.cc](#).

3.151.2.10 nvert [1/2]

```
int ToPoTyPe::nvert
```

Definition at line 48 of file [diawrap.cc](#).

3.151.2.11 nloops

```
int ToPoTyPe::nloops
```

Definition at line 48 of file [topowrap.cc](#).

3.151.2.12 nlegs

```
int ToPoTyPe::nlegs
```

Definition at line 48 of file [topowrap.cc](#).

3.151.2.13 npadding

```
int ToPoTyPe::npadding
```

Definition at line 48 of file [topowrap.cc](#).

3.151.2.14 nvert [2/2]

```
WORD ToPoTyPe::nvert
```

Definition at line 51 of file [topowrap.cc](#).

3.151.2.15 sopi

WORD ToPoTyPe::sopi

Definition at line 52 of file [topowrap.cc](#).

The documentation for this struct was generated from the following files:

- [diawrap.cc](#)
- [topowrap.cc](#)

3.152 TrAcEn Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [accu](#)
- WORD * [accup](#)
- WORD * [termp](#)
- WORD * [perm](#)
- WORD * [inlist](#)
- WORD [sgn](#)
- WORD [num](#)
- WORD [level](#)
- WORD [factor](#)
- WORD [allsign](#)

3.152.1 Detailed Description

The struct TRACEN keeps track of the progress during the expansion of a 4-dimensional trace. Each time a term gets generated the expansion tree continues in the next statement. When it returns it has to know where to continue.

Definition at line 806 of file [structs.h](#).

3.152.2 Field Documentation

3.152.2.1 accu

WORD* TrAcEn::accu

Definition at line 807 of file [structs.h](#).

3.152.2.2 accup

WORD* TrAcEn::accup

Definition at line 808 of file [structs.h](#).

3.152.2.3 temp

WORD* TrAcEn::temp

Definition at line 809 of file [structs.h](#).

3.152.2.4 perm

WORD* TrAcEn::perm

Definition at line 810 of file [structs.h](#).

3.152.2.5 inlist

WORD* TrAcEn::inlist

Definition at line 811 of file [structs.h](#).

3.152.2.6 sgn

WORD TrAcEn::sgn

Definition at line 812 of file [structs.h](#).

3.152.2.7 num

WORD TrAcEn::num

Definition at line 812 of file [structs.h](#).

3.152.2.8 level

WORD TrAcEn::level

Definition at line 812 of file [structs.h](#).

3.152.2.9 factor

WORD TrAcEn::factor

Definition at line 812 of file [structs.h](#).

3.152.2.10 allsign

WORD TrAcEn::allsign

Definition at line 812 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.153 TrAcEs Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [accu](#)
- WORD * [accup](#)
- WORD * [termp](#)
- WORD * [perm](#)
- WORD * [inlist](#)
- WORD * [nt3](#)
- WORD * [nt4](#)
- WORD * [j3](#)
- WORD * [j4](#)
- WORD * [e3](#)
- WORD * [e4](#)
- WORD * [eers](#)
- WORD * [mepf](#)
- WORD * [mdel](#)
- WORD * [pepf](#)
- WORD * [pdel](#)
- WORD [sgn](#)
- WORD [stap](#)
- WORD [step1](#)
- WORD [kstep](#)
- WORD [mdum](#)
- WORD [gamm](#)
- WORD [ad](#)
- WORD [a3](#)
- WORD [a4](#)
- WORD [lc3](#)
- WORD [lc4](#)
- WORD [sign1](#)
- WORD [sign2](#)
- WORD [gamma5](#)
- WORD [num](#)
- WORD [level](#)
- WORD [factor](#)
- WORD [allsign](#)
- WORD [finalstep](#)

3.153.1 Detailed Description

The struct TRACES keeps track of the progress during the expansion of a 4-dimensional trace. Each time a term gets generated the expansion tree continues in the next statement. When it returns it has to know where to continue. The 4-dimensional traces are more complicated than the n-dimensional traces (see TRACEN) because of the extra tricks that can be used. They are responsible for the shorter final expressions.

Definition at line 774 of file [structs.h](#).

3.153.2 Field Documentation

3.153.2.1 `accu`

WORD* TrAcEs::accu

Definition at line 775 of file [structs.h](#).

3.153.2.2 `accup`

WORD* TrAcEs::accup

Definition at line 776 of file [structs.h](#).

3.153.2.3 `termp`

WORD* TrAcEs::termp

Definition at line 777 of file [structs.h](#).

3.153.2.4 `perm`

WORD* TrAcEs::perm

Definition at line 778 of file [structs.h](#).

3.153.2.5 `inlist`

WORD* TrAcEs::inlist

Definition at line 779 of file [structs.h](#).

3.153.2.6 `nt3`

WORD* TrAcEs::nt3

Definition at line 780 of file [structs.h](#).

3.153.2.7 nt4

WORD* TrAcEs::nt4

Definition at line 781 of file [structs.h](#).

3.153.2.8 j3

WORD* TrAcEs::j3

Definition at line 782 of file [structs.h](#).

3.153.2.9 j4

WORD* TrAcEs::j4

Definition at line 783 of file [structs.h](#).

3.153.2.10 e3

WORD* TrAcEs::e3

Definition at line 784 of file [structs.h](#).

3.153.2.11 e4

WORD* TrAcEs::e4

Definition at line 785 of file [structs.h](#).

3.153.2.12 eers

WORD* TrAcEs::eers

Definition at line 786 of file [structs.h](#).

3.153.2.13 mepf

WORD* TrAcEs::mepf

Definition at line 787 of file [structs.h](#).

3.153.2.14 mdel

WORD* TrAcEs::mdel

Definition at line 788 of file [structs.h](#).

3.153.2.15 pepf

WORD* TrAcEs::pepf

Definition at line 789 of file [structs.h](#).

3.153.2.16 pdel

WORD* TrAcEs::pdel

Definition at line 790 of file [structs.h](#).

3.153.2.17 sgn

WORD TrAcEs::sgn

Definition at line 791 of file [structs.h](#).

3.153.2.18 stap

WORD TrAcEs::stap

Definition at line 792 of file [structs.h](#).

3.153.2.19 step1

WORD TrAcEs::step1

Definition at line 793 of file [structs.h](#).

3.153.2.20 kstep

WORD TrAcEs::kstep

Definition at line 793 of file [structs.h](#).

3.153.2.21 mdum

WORD TrAcEs::mdum

Definition at line 793 of file [structs.h](#).

3.153.2.22 gamm

WORD TrAcEs::gamm

Definition at line 794 of file [structs.h](#).

3.153.2.23 ad

WORD TrAcEs::ad

Definition at line 794 of file [structs.h](#).

3.153.2.24 a3

WORD TrAcEs::a3

Definition at line 794 of file [structs.h](#).

3.153.2.25 a4

WORD TrAcEs::a4

Definition at line 794 of file [structs.h](#).

3.153.2.26 lc3

WORD TrAcEs::lc3

Definition at line 794 of file [structs.h](#).

3.153.2.27 lc4

WORD TrAcEs::lc4

Definition at line 794 of file [structs.h](#).

3.153.2.28 sign1

WORD TrAcEs::sign1

Definition at line 795 of file [structs.h](#).

3.153.2.29 sign2

WORD TrAcEs::sign2

Definition at line 795 of file [structs.h](#).

3.153.2.30 gamma5

WORD TrAcEs::gamma5

Definition at line 795 of file [structs.h](#).

3.153.2.31 num

WORD TrAcEs::num

Definition at line 795 of file [structs.h](#).

3.153.2.32 level

WORD TrAcEs::level

Definition at line 795 of file [structs.h](#).

3.153.2.33 factor

WORD TrAcEs::factor

Definition at line 795 of file [structs.h](#).

3.153.2.34 allsign

WORD TrAcEs::allsign

Definition at line 795 of file [structs.h](#).

3.153.2.35 finalstep

WORD TrAcEs::finalstep

Definition at line 796 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.154 tree Struct Reference

```
#include <structs.h>
```

Data Fields

- int [parent](#)
- int [left](#)
- int [right](#)
- int [value](#)
- int [blnce](#)
- int [usage](#)

3.154.1 Detailed Description

The subexpressions in the compiler are kept track of in a (balanced) tree to reduce the need for subexpressions and hence save much space in large rhs expressions (like when we have xxxxxx occurrences of objects like $f(x+1, x+1)$ in which each $x+1$ becomes a subexpression. The struct that controls this tree is COMPTREE.

Definition at line 288 of file [structs.h](#).

3.154.2 Field Documentation

3.154.2.1 parent

```
int tree::parent
```

Index of parent

Definition at line 289 of file [structs.h](#).

Referenced by [IniFbuffer\(\)](#).

3.154.2.2 left

```
int tree::left
```

Left child (if not -1)

Definition at line 290 of file [structs.h](#).

Referenced by [IniFbuffer\(\)](#).

3.154.2.3 right

```
int tree::right
```

Right child (if not -1)

Definition at line 291 of file [structs.h](#).

Referenced by [IniFbuffer\(\)](#).

3.154.2.4 value

```
int tree::value
```

The object to be sorted and searched

Definition at line 292 of file [structs.h](#).

Referenced by [IniFbuffer\(\)](#).

3.154.2.5 blnce

```
int tree::blnce
```

Balance factor

Definition at line 293 of file [structs.h](#).

Referenced by [IniFbuffer\(\)](#).

3.154.2.6 usage

```
int tree::usage
```

Number of uses in some types of trees

Definition at line 294 of file [structs.h](#).


Referenced by [CleanupArgCache\(\)](#), and [IniFbuffer\(\)](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.155 tree_node Class Reference

Collaboration diagram for tree_node:



Public Member Functions

- [tree_node](#) (int _var=0)
- [tree_node](#) (const [tree_node](#) &other)
- [tree_node](#) & [operator=](#) (const [tree_node](#) &other)

Data Fields

- vector< [tree_node](#) > [childs](#)
- double [sum_results](#)
- int [num_visits](#)
- WORD [var](#)
- bool [finished](#)

3.155.1 Detailed Description

Definition at line [125](#) of file [optimize.cc](#).

3.155.2 Constructor & Destructor Documentation

3.155.2.1 [tree_node\(\)](#) [1/2]

```
tree_node::tree_node (  
    int _var = 0 ) [inline]
```

Definition at line [133](#) of file [optimize.cc](#).

3.155.2.2 [tree_node\(\)](#) [2/2]

```
tree_node::tree_node (  
    const tree\_node & other ) [inline]
```

Definition at line [136](#) of file [optimize.cc](#).

3.155.3 Member Function Documentation

3.155.3.1 [operator=\(\)](#)

```
tree\_node & tree_node::operator= (  
    const tree\_node & other ) [inline]
```

Definition at line [143](#) of file [optimize.cc](#).

3.155.4 Field Documentation

3.155.4.1 [childs](#)

```
vector<tree\_node> tree_node::childs
```

Definition at line [127](#) of file [optimize.cc](#).

3.155.4.2 `sum_results`

```
double tree_node::sum_results
```

Definition at line 128 of file [optimize.cc](#).

3.155.4.3 `num_visits`

```
int tree_node::num_visits
```

Definition at line 129 of file [optimize.cc](#).

3.155.4.4 `var`

```
WORD tree_node::var
```

Definition at line 130 of file [optimize.cc](#).

3.155.4.5 `finished`

```
bool tree_node::finished
```

Definition at line 131 of file [optimize.cc](#).

The documentation for this class was generated from the following file:

- [optimize.cc](#)

3.156 VaRrEnUm Struct Reference

```
#include <structs.h>
```

Data Fields

- WORD * [start](#)
- WORD * [lo](#)
- WORD * [hi](#)

3.156.1 Detailed Description

Contains the pointers to an array in which a binary search will be performed.

Definition at line 164 of file [structs.h](#).

3.156.2 Field Documentation

3.156.2.1 start

```
WORD* VaRrEnUm::start
```

Start point for search. Points inbetween lo and hi

Definition at line 165 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

3.156.2.2 lo

```
WORD* VaRrEnUm::lo
```

Start of memory area

Definition at line 166 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#), [Generator\(\)](#), and [GetFirstTerm\(\)](#).

3.156.2.3 hi

```
WORD* VaRrEnUm::hi
```

End of memory area

Definition at line 167 of file [structs.h](#).

Referenced by [DoRecovery\(\)](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.157 VeCtOr Struct Reference

Data Fields

- LONG [name](#)
- WORD [complex](#)
- WORD [number](#)
- WORD [flags](#)
- WORD [node](#)
- WORD [namesize](#)
- WORD [dimension](#)

3.157.1 Detailed Description

Definition at line 462 of file [structs.h](#).

3.157.2 Field Documentation

3.157.2.1 name

```
LONG VeCtOr::name
```

Definition at line 463 of file [structs.h](#).

3.157.2.2 complex

```
WORD VeCtOr::complex
```

Definition at line 464 of file [structs.h](#).

3.157.2.3 number

```
WORD VeCtOr::number
```

Definition at line 465 of file [structs.h](#).

3.157.2.4 flags

```
WORD VeCtOr::flags
```

Definition at line 466 of file [structs.h](#).

3.157.2.5 node

```
WORD VeCtOr::node
```

Definition at line 467 of file [structs.h](#).

3.157.2.6 namesize

```
WORD VeCtOr::namesize
```

Definition at line 468 of file [structs.h](#).

3.157.2.7 dimension

WORD VeCtOr::dimension


Definition at line 469 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.158 VeRtEx Struct Reference

Collaboration diagram for VeRtEx:



Data Fields

- **PARTICLE** [particles](#) [MAXPARTICLES]
- WORD [couplings](#) [2 *MAXCOUPLINGS]
- WORD [nparticles](#)
- WORD [ncouplings](#)
- WORD [type](#)
- WORD [error](#)
- WORD [externonly](#)
- WORD [spare](#)

3.158.1 Detailed Description

Definition at line 626 of file [structs.h](#).

3.158.2 Field Documentation

3.158.2.1 particles

PARTICLE [VeRtEx::particles](#) [MAXPARTICLES]

Definition at line 627 of file [structs.h](#).

3.158.2.2 couplings

WORD VeRtEx::couplings[2 *MAXCOUPLINGS]

Definition at line 628 of file [structs.h](#).

3.158.2.3 nparticles

WORD VeRtEx::nparticles

Definition at line 629 of file [structs.h](#).

3.158.2.4 ncouplings

WORD VeRtEx::ncouplings

Definition at line 630 of file [structs.h](#).

3.158.2.5 type

WORD VeRtEx::type

Definition at line 631 of file [structs.h](#).

3.158.2.6 error

WORD VeRtEx::error

Definition at line 632 of file [structs.h](#).

3.158.2.7 externonly

WORD VeRtEx::externonly

Definition at line 633 of file [structs.h](#).

3.158.2.8 spare

WORD VeRtEx::spare

Definition at line 634 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)

3.159 X_const Struct Reference

```
#include <structs.h>
```

Data Fields

- `UBYTE * currentPrompt`
- `UBYTE * shellname`
- `UBYTE * stderrname`
- `int timeout`
- `int killSignal`
- `int killWholeGroup`
- `int daemonize`
- `int currentExternalChannel`

3.159.1 Detailed Description

The `X_const` struct is part of the global data and resides in the `ALLGLOBALS` struct `A` under the name `X`. We see it used with the macro `AX` as in `AX.timeout`. It contains variables that involve communication with external programs.

Definition at line 2410 of file `structs.h`.

3.159.2 Field Documentation

3.159.2.1 currentPrompt

```
UBYTE* X_const::currentPrompt
```

Definition at line 2411 of file `structs.h`.

3.159.2.2 shellname

```
UBYTE* X_const::shellname
```

Definition at line 2412 of file `structs.h`.

3.159.2.3 stderrname

```
UBYTE* X_const::stderrname
```

Definition at line 2414 of file `structs.h`.

3.159.2.4 timeout

```
int X_const::timeout
```

Definition at line 2416 of file `structs.h`.

3.159.2.5 killSignal

```
int X_const::killSignal
```

Definition at line 2419 of file [structs.h](#).

3.159.2.6 killWholeGroup

```
int X_const::killWholeGroup
```

Definition at line 2420 of file [structs.h](#).

3.159.2.7 daemonize

```
int X_const::daemonize
```

Definition at line 2422 of file [structs.h](#).

3.159.2.8 currentExternalChannel

```
int X_const::currentExternalChannel
```

Definition at line 2423 of file [structs.h](#).

The documentation for this struct was generated from the following file:

- [structs.h](#)


Chapter 4

File Documentation

4.1 argument.c File Reference

```
#include "form3.h"
```

Include dependency graph for argument.c:

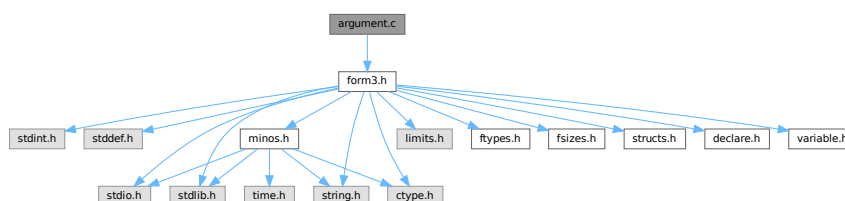

Macros

- `#define` [NEWORDER](#)

Functions

- `int` [execarg](#) (PHEAD WORD *term, WORD level)
- `int` [execterm](#) (PHEAD WORD *term, WORD level)
- `int` [ArgumentImplode](#) (PHEAD WORD *term, WORD *thelist)
- `int` [ArgumentExplode](#) (PHEAD WORD *term, WORD *thelist)
- `int` [ArgFactorize](#) (PHEAD WORD *argin, WORD *argout)
- `WORD` [FindArg](#) (PHEAD WORD *a)
- `int` [InsertArg](#) (PHEAD WORD *argin, WORD *argout, int par)
- `int` [CleanupArgCache](#) (PHEAD WORD bufnum)
- `int` [ArgSymbolMerge](#) (WORD *t1, WORD *t2)
- `int` [ArgDotproductMerge](#) (WORD *t1, WORD *t2)
- `WORD *` [TakeArgContent](#) (PHEAD WORD *argin, WORD *argout)
- `WORD *` [MakeInteger](#) (PHEAD WORD *argin, WORD *argout, WORD *argfree)
- `WORD *` [MakeMod](#) (PHEAD WORD *argin, WORD *argout, WORD *argfree)
- `void` [SortWeights](#) (LONG *weights, LONG *extraspace, WORD number)

4.1.1 Detailed Description

Contains the routines that deal with the execution phase of the argument and related statements (like term)

Definition in file [argument.c](#).

4.1.2 Macro Definition Documentation

4.1.2.1 NEWORDER

```
#define NEWORDER
```

Factorizes an argument in general notation (meaning that the first word of the argument is a positive size indicator)
Input (argin): pointer to the complete argument [Output](#) (argout): Pointer to where the output should be written. This is in the WorkSpace Return value should be negative if anything goes wrong.

The notation of the output should be a string of arguments terminated by the number zero.

Originally we sorted in a way that the constants came last. This gave conflicts with the dollar and expression factorizations (in the expressions we wanted the zero first and then followed by the constants).

Definition at line [2064](#) of file [argument.c](#).

4.1.3 Function Documentation

4.1.3.1 `execarg()`

```
int execarg (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [56](#) of file [argument.c](#).

4.1.3.2 `execterm()`

```
int execterm (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [1775](#) of file [argument.c](#).

4.1.3.3 `ArgumentImplode()`

```
int ArgumentImplode (
    PHEAD WORD * term,
    WORD * thelist )
```

Definition at line [1851](#) of file [argument.c](#).

4.1.3.4 ArgumentExplode()

```
int ArgumentExplode (
    PHEAD WORD * term,
    WORD * thelist )
```

Definition at line 1955 of file [argument.c](#).

4.1.3.5 ArgFactorize()

```
int ArgFactorize (
    PHEAD WORD * argin,
    WORD * argout )
```

Definition at line 2066 of file [argument.c](#).

4.1.3.6 FindArg()

```
WORD FindArg (
    PHEAD WORD * a )
```

Looks the argument up in the (workers) table. If it is found the number in the table is returned (plus one to make it positive). If it is not found we look in the compiler provided table. If it is found - the number in the table is returned (minus one to make it negative). If in neither table we return zero.

Definition at line 2519 of file [argument.c](#).

4.1.3.7 InsertArg()


```
int InsertArg (
    PHEAD WORD * argin,
    WORD * argout,
    int par )
```

Inserts the argument into the (workers) table. If the table is too full we eliminate half of it. The eliminated elements are the ones that have not been used most recently, weighted by their total use and age(?). If par == 0 it inserts in the regular factorization cache. If par == 1 it inserts in the cache defined with the FactorCache statement

Definition at line 2543 of file [argument.c](#).

References [AddNtoC\(\)](#), [AddRHS\(\)](#), and [CleanupArgCache\(\)](#).

Here is the call graph for this function:

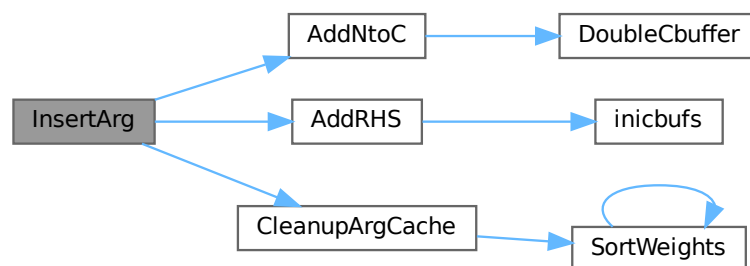

4.1.3.8 CleanupArgCache()

```
int CleanupArgCache (
    PHEAD WORD bufnum )
```


Cleans up the argument factorization cache. We throw half the elements. For a weight of what we want to keep we use the product of usage and the number in the buffer.

Definition at line 2578 of file [argument.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::Pointer](#), [CbUf::rhs](#), [SortWeights\(\)](#), and [tree::usage](#).

Referenced by [InsertArg\(\)](#).

Here is the call graph for this function:



4.1.3.9 ArgSymbolMerge()

```
int ArgSymbolMerge (
    WORD * t1,
    WORD * t2 )
```

Definition at line 2649 of file [argument.c](#).

4.1.3.10 ArgDotproductMerge()

```
int ArgDotproductMerge (
    WORD * t1,
    WORD * t2 )
```

Definition at line 2704 of file [argument.c](#).

4.1.3.11 TakeArgContent()


```
WORD * TakeArgContent (
    PHEAD WORD * argin,
    WORD * argout )
```

Implements part of the old ExecArg in which we take common factors from arguments with more than one term. The common pieces are put in argout as a sequence of arguments. The part with the multiple terms that are now relative prime is put in argfree which is allocated via TermMalloc and is given as the return value. The difference with the old code is that negative powers are always removed. Hence it is as in MakeInteger in which only numerators will be left: now only zero or positive powers will be remaining.

Definition at line 2772 of file [argument.c](#).

References [EndSort\(\)](#), [MakeInteger\(\)](#), [MakeMod\(\)](#), [NewSort\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

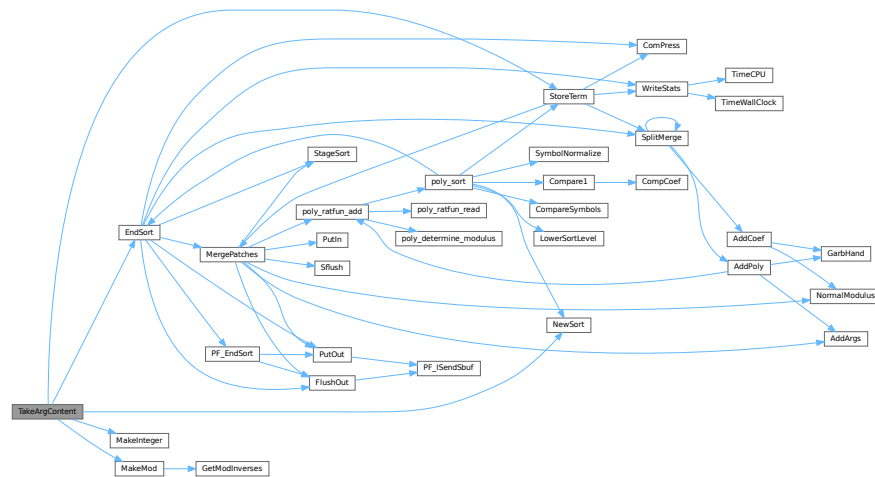

4.1.3.12 MakeInteger()

```
WORD * MakeInteger (
    PHEAD WORD * argin,
    WORD * argout,
    WORD * argfree )
```

For normalizing everything to integers we have to determine for all elements of this argument the LCM of the denominators and the GCD of the numerators. The input argument is in argin. The number that comes out should go to argout. The new pointer in the argout buffer is the return value. The normalized argument is in argfree.

Definition at line 3318 of file [argument.c](#).

Referenced by [TakeArgContent\(\)](#).

4.1.3.13 MakeMod()

```
WORD * MakeMod (
    PHEAD WORD * argin,
    WORD * argout,
    WORD * argfree )
```

Similar to MakeInteger but now with modulus arithmetic using only a one WORD 'prime'. We make the coefficient of the first term in the argument equal to one. Already the coefficients are taken modulus AN.cmod and AN.ncmod == 1

Definition at line 3489 of file [argument.c](#).

References [GetModInverses\(\)](#).

Referenced by [TakeArgContent\(\)](#).

Here is the call graph for this function:



4.1.3.14 SortWeights()

```
void SortWeights (
    LONG * weights,
    LONG * extraspace,
    WORD number )
```

Sorts an array of LONGS in the same way SplitMerge (in [sort.c](#)) works We use gradual division in two.

Definition at line 3534 of file [argument.c](#).

References [SortWeights\(\)](#).

Referenced by [CleanupArgCache\(\)](#), and [SortWeights\(\)](#).

Here is the call graph for this function:



4.2 argument.c

[Go to the documentation of this file.](#)

```

00001
00007 /* #[ License : */
00008 /*
00009 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00010 *   When using this file you are requested to refer to the publication
00011 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00012 *   This is considered a matter of courtesy as the development was paid
00013 *   for by FOM the Dutch physics granting agency and we would like to
00014 *   be able to track its scientific use to convince FOM of its value
00015 *   for the community.
00016 *
00017 *   This file is part of FORM.
00018 *
00019 *   FORM is free software: you can redistribute it and/or modify it under the
00020 *   terms of the GNU General Public License as published by the Free Software
00021 *   Foundation, either version 3 of the License, or (at your option) any later
00022 *   version.
00023 *
00024 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00025 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00026 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00027 *   details.
00028 *
00029 *   You should have received a copy of the GNU General Public License along
00030 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00031 */
00032 /* #[ License : */
00033
00034 /*
00035 *   #[ include : argument.c
00036 */
00037
00038 #include "form3.h"
00039
00040 /*
00041 *   #[ include :
00042 *   #[ execarg :
00043
00044 *   Executes the subset of statements in an argument environment.
00045 *   The calling routine should be of the type
00046 *   if ( C->lhs[level][0] == TYPEARG ) {
00047 *       if ( execarg(term,level) ) goto GenCall;
00048 *       level = C->lhs[level][2];
00049 *       goto SkipCount;
00050 *   }
00051 *   Note that there will be cases in which extra space is needed.
00052 *   In addition the compare with C->numlhs isn't very fine, because we
00053 *   need to insert a different value (C->lhs[level][2]).
00054 */
00055
00056 int execarg(PHEAD WORD *term, WORD level)
00057 {
00058     GETBIDENTITY
00059     WORD *t, *r, *m, *v;
00060     WORD *start, *stop, *rstop, *r1, *r2 = 0, *r3 = 0, *r4, *r5, *r6, *r7, *r8, *r9;
00061     WORD *mm, *mstop, *rnext, *rrr, *factor, type, ngcd, nq;
00062     CBUF *C = cbuf+AM.rbufnum, *CC = cbuf+AT.ebufnum;
00063     WORD i, j, k, oldnumlhs = AR.Cnumlhs, count, olddefer = AR.DeferFlag;
00064     int action = 0;
00065     WORD oldnumrhs = CC->numrhs, size, pow, jj;
00066     LONG oldcpointer = CC->Pointer - CC->Buffer, oldppointer = AT.pWorkPointer, lp;
00067     WORD *oldwork = AT.WorkPointer, *oldwork2, scale, renorm;
00068     WORD kLCM = 0, kGCD = 0, kGCD2, kkLCM = 0, jLCM = 0, jGCD, sign = 1;
00069     int ii, didpolyratfun;
00070     UWORD *EAscrat, *GCDBuffer = 0, *GCDBuffer2 = 0, *LCMBuffer = 0, *LCMb = 0, *LCMc = 0;
00071     AT.WorkPointer += *term;
00072     start = C->lhs[level];
00073     AR.Cnumlhs = start[2];
00074     stop = start + start[1];
00075     type = *start;
00076     scale = start[4];
00077     renorm = start[5];
00078     start += TYPEARGHEADSIZE;
00079 /*
00080 *   #[ Dollars :
00081 */
00082 if ( renorm && start[1] != 0 ) { /* We have to evaluate $ symbols inside () */
00083     t = start+1; factor = oldwork2 = v = AT.WorkPointer;
00084     i = *t; t++;
00085     *v++ = i+3; i--; NCOPY(v,t,i);
00086     *v++ = 1; *v++ = 1; *v++ = 3;
00087     AT.WorkPointer = v;

```

```

00088     start = t; AR.Eside = LHSIDEX;
00089     NewSort(BHEAD0);
00090     if ( Generator(BHEAD factor,AR.Cnumlhs) ) {
00091         LowerSortLevel();
00092         AT.WorkPointer = oldwork;
00093         return(-1);
00094     }
00095     AT.WorkPointer = v;
00096     if ( EndSort(BHEAD factor,0) < 0 ) {}
00097     if ( *factor && *(factor+*factor) != 0 ) {
00098         MLOCK(ErrorMessageLock);
00099         MesPrint("%$ in () does not evaluate into a single term");
00100         MUNLOCK(ErrorMessageLock);
00101         return(-1);
00102     }
00103     AR.Eside = RHSIDE;
00104     if ( *factor > 0 ) {
00105         v = factor+*factor;
00106         v -= ABS(v[-1]);
00107         *factor = v-factor;
00108     }
00109     AT.WorkPointer = v;
00110 }
00111 else {
00112     if ( *start < 0 ) {
00113         factor = start + 1;
00114         start += -*start;
00115     }
00116     else factor = 0;
00117 }
00118 /*
00119 #] Dollars :
00120 */
00121 t = term;
00122 r = t + *t;
00123 rstop = r - ABS(r[-1]);
00124 t++;
00125 /*
00126 #[ Argument detection : + argument statement
00127 */
00128 /*
00129 Allocate Numbers for MakeInteger here, for re-use in case multiple
00130 functions are treated in the same term.
00131 */
00132 if ( type == TYPENORM4 ) {
00133     GCDBuffer = NumberMalloc("execarg");
00134     GCDBuffer2 = NumberMalloc("execarg");
00135     LCMbuffer = NumberMalloc("execarg");
00136     LCMb = NumberMalloc("execarg"); LCMc = NumberMalloc("execarg");
00137 }
00138 didpolyratfun = 0;
00139 while ( t < rstop ) {
00140     if ( *t >= FUNCTION && functions[*t-FUNCTION].spec <= 0 ) {
00141 /*
00142         We have a function. First count the number of arguments.
00143         Tensors are excluded.
00144 */
00145         count = 0;
00146         v = t;
00147         m = t + FUNHEAD;
00148         r = t + t[1];
00149         while ( m < r ) {
00150             count++;
00151             NEXTARG(m)
00152         }
00153         if ( count <= 0 ) { t += t[1]; continue; }
00154 /*
00155         Now we take the arguments one by one and test for a match
00156 */
00157         for ( i = 1; i <= count; i++ ) {
00158             m = start;
00159             while ( m < stop ) {
00160                 r = m + m[1];
00161                 j = *r++;
00162                 if ( j > 1 ) {
00163                     while ( --j > 0 ) {
00164                         if ( *r == i ) goto RightNum;
00165                         r++;
00166                     }
00167                     m = r;
00168                     continue;
00169                 }
00170 RightNum:
00171                 if ( m[1] == 2 ) {
00172 #ifdef WITHFLOAT
00173                     if ( *t != FLOATFUN || TestFloat(t) == 0 )
00174 #endif

```

```

00175         {
00176             m += 2;
00177             m += *m;
00178             goto HaveToDo;
00179         }
00180 #ifdef WITHFLOAT
00181         else {
00182             m += 2;
00183         }
00184 #endif
00185     }
00186     else {
00187         r = m + m[1];
00188         m += 2;
00189         while ( m < r ) {
00190             if ( *m == CSET ) {
00191                 r1 = SetElements + Sets[m[1]].first;
00192                 r2 = SetElements + Sets[m[1]].last;
00193                 while ( r1 < r2 ) {
00194                     if ( *r1++ == *t ) goto HaveToDo;
00195                 }
00196             }
00197             else if ( m[1] == *t ) goto HaveToDo;
00198             m += 2;
00199         }
00200     }
00201     m += *m;
00202 }
00203 continue;
00204 HaveToDo:
00205 /*
00206     If we come here we have to do the argument i (first is 1).
00207 */
00208     sign = 1;
00209     action = 1;
00210     if ( *t == AR.PolyFun ) didpolyratfun = 1;
00211     v[2] |= DIRTYFLAG;
00212     r = t + FUNHEAD;
00213     j = i;
00214     while ( --j > 0 ) { NEXTARG(r) }
00215     if ( ( type == TYPESPLITARG ) || ( type == TYPESPLITFIRSTARG )
00216         || ( type == TYPESPLITLASTARG ) ) {
00217         if ( *t > FUNCTION && *r > 0 ) {
00218             WantAddPointers(2);
00219             AT.pWorkSpace[AT.pWorkPointer++] = t;
00220             AT.pWorkSpace[AT.pWorkPointer++] = r;
00221         }
00222         continue;
00223     }
00224     else if ( type == TYPESPLITARG2 ) {
00225         if ( *t > FUNCTION && *r > 0 ) {
00226             WantAddPointers(2);
00227             AT.pWorkSpace[AT.pWorkPointer++] = t;
00228             AT.pWorkSpace[AT.pWorkPointer++] = r;
00229         }
00230         continue;
00231     }
00232     else if ( type == TYPEFACTARG || type == TYPEFACTARG2 ) {
00233         if ( *t > FUNCTION || *t == DENOMINATOR ) {
00234             if ( *r > 0 ) {
00235                 mm = r + ARGHEAD; mstop = r + *r;
00236                 if ( mm + *mm < mstop ) {
00237                     WantAddPointers(2);
00238                     AT.pWorkSpace[AT.pWorkPointer++] = t;
00239                     AT.pWorkSpace[AT.pWorkPointer++] = r;
00240                     continue;
00241                 }
00242                 if ( *mm == 1+ABS(mstop[-1]) ) continue;
00243                 if ( mstop[-3] != 1 || mstop[-2] != 1
00244                     || mstop[-1] != 3 ) {
00245                     WantAddPointers(2);
00246                     AT.pWorkSpace[AT.pWorkPointer++] = t;
00247                     AT.pWorkSpace[AT.pWorkPointer++] = r;
00248                     continue;
00249                 }
00250             }
00251             GETSTOP(mm,mstop); mm++;
00252             if ( mm + mm[1] < mstop ) {
00253                 WantAddPointers(2);
00254                 AT.pWorkSpace[AT.pWorkPointer++] = t;
00255                 AT.pWorkSpace[AT.pWorkPointer++] = r;
00256                 continue;
00257             }
00258             if ( *mm == SYMBOL && ( mm[1] > 4 ||
00259                 ( mm[3] != 1 && mm[3] != -1 ) ) ) {
00260                 WantAddPointers(2);
00261                 AT.pWorkSpace[AT.pWorkPointer++] = t;
00262                 AT.pWorkSpace[AT.pWorkPointer++] = r;

```

```

00262         continue;
00263     }
00264     else if ( *mm == DOTPRODUCT && ( mm[1] > 5 ||
00265         ( mm[4] != 1 && mm[4] != -1 ) ) ) {
00266         WantAddPointers(2);
00267         AT.pWorkSpace[AT.pWorkPointer++] = t;
00268         AT.pWorkSpace[AT.pWorkPointer++] = r;
00269         continue;
00270     }
00271     else if ( ( *mm == DELTA || *mm == VECTOR )
00272         && mm[1] > 4 ) {
00273         WantAddPointers(2);
00274         AT.pWorkSpace[AT.pWorkPointer++] = t;
00275         AT.pWorkSpace[AT.pWorkPointer++] = r;
00276         continue;
00277     }
00278     }
00279     else if ( factor && *factor == 4 && factor[2] == 1 ) {
00280         WantAddPointers(2);
00281         AT.pWorkSpace[AT.pWorkPointer++] = t;
00282         AT.pWorkSpace[AT.pWorkPointer++] = r;
00283         continue;
00284     }
00285     else if ( factor && *factor == 0
00286         && ( *r == -SNUMBER && r[1] != 1 ) ) {
00287         WantAddPointers(2);
00288         AT.pWorkSpace[AT.pWorkPointer++] = t;
00289         AT.pWorkSpace[AT.pWorkPointer++] = r;
00290         continue;
00291     }
00292     else if ( *r == -MINVECTOR ) {
00293         WantAddPointers(2);
00294         AT.pWorkSpace[AT.pWorkPointer++] = t;
00295         AT.pWorkSpace[AT.pWorkPointer++] = r;
00296         continue;
00297     }
00298     }
00299     continue;
00300 }
00301 else if ( type == TYPENORM || type == TYPENORM2 || type == TYPENORM3 || type ==
TYPENORM4 ) {
00302     if ( *r < 0 ) {
00303         WORD rone;
00304         if ( *r == -MINVECTOR ) { rone = -1; *r = -INDEX; }
00305         else if ( *r != -SNUMBER || r[1] == 1 || r[1] == 0 ) continue;
00306         else { rone = r[1]; r[1] = 1; }
00307     /*
00308     Now we must multiply the general coefficient by r[1]
00309     */
00310     if ( scale && ( factor == 0 || *factor ) ) {
00311         action = 1;
00312         v[2] |= DIRTYFLAG;
00313         if ( rone < 0 ) {
00314             if ( type == TYPENORM3 ) k = 1;
00315             else k = -1;
00316             rone = -rone;
00317         }
00318         else k = 1;
00319         r1 = term + *term;
00320         size = r1[-1];
00321         size = REDLENG(size);
00322         if ( scale > 0 ) {
00323             for ( jj = 0; jj < scale; jj++ ) {
00324                 if ( Mully(BHEAD (UWORD *)rstop,&size,(UWORD *)(&rone),k) )
00325                     goto execargerr;
00326             }
00327         }
00328         else {
00329             for ( jj = 0; jj > scale; jj-- ) {
00330                 if ( Divvy(BHEAD (UWORD *)rstop,&size,(UWORD *)(&rone),k) )
00331                     goto execargerr;
00332             }
00333         }
00334         size = INCLENG(size);
00335         k = size < 0 ? -size: size;
00336         rstop[k-1] = size;
00337         *term = (WORD)(rstop - term) + k;
00338     }
00339     continue;
00340 }
00341 /*
00342 Now we have to find a reference term.
00343 If factor is defined and *factor != 0 we have to
00344 look for the first term that matches the pattern exactly
00345 Otherwise the first term plays this role
00346 If its coefficient is not one,
00347 we must set up a division of the whole argument by

```

```

00348      this coefficient, and a multiplication of the term
00349      when the type is not equal to TYPENORM2.
00350      We first multiply the coefficient of the term.
00351      Then we set up the division.
00352
00353      First find the magic term
00354  */
00355      if ( type == TYPENORM4 ) {
00356  /*
00357          For normalizing everything to integers we have to
00358          determine for all elements of this argument the LCM of
00359          the denominators and the GCD of the numerators.
00360          The buffers have been allocated already.
00361  */
00362          r4 = r + *r;
00363          r1 = r + ARGHEAD;
00364  /*
00365          First take the first term to load up the LCM and the GCD
00366  */
00367          r2 = r1 + *r1;
00368          j = r2[-1];
00369          if ( j < 0 ) sign = -1;
00370          r3 = r2 - ABS(j);
00371          k = REDLENG(j);
00372          if ( k < 0 ) k = -k;
00373          while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00374          for ( kGCD = 0; kGCD < k; kGCD++ ) GCDbuffer[kGCD] = r3[kGCD];
00375          k = REDLENG(j);
00376          if ( k < 0 ) k = -k;
00377          r3 += k;
00378          while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00379          for ( kLCM = 0; kLCM < k; kLCM++ ) LCMbuffer[kLCM] = r3[kLCM];
00380          r1 = r2;
00381  /*
00382          Now go through the rest of the terms in this argument.
00383  */
00384          while ( r1 < r4 ) {
00385              r2 = r1 + *r1;
00386              j = r2[-1];
00387              r3 = r2 - ABS(j);
00388              k = REDLENG(j);
00389              if ( k < 0 ) k = -k;
00390              while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00391              if ( ( ( GCDbuffer[0] == 1 ) && ( kGCD == 1 ) ) ) {
00392  /*
00393                  GCD is already 1
00394  */
00395              }
00396              else if ( ( ( k != 1 ) || ( r3[0] != 1 ) ) ) {
00397                  if ( GcdLong(BHEAD GCDbuffer,kGCD, (UWORD *)r3,k,GCDbuffer2,&kGCD2) ) {
00398                      NumberFree(GCDbuffer,"execarg");
00399                      NumberFree(GCDbuffer2,"execarg");
00400                      NumberFree(LCMbuffer,"execarg");
00401                      NumberFree(LCMB,"execarg"); NumberFree(LCMc,"execarg");
00402                      goto execargerr;
00403                  }
00404                  kGCD = kGCD2;
00405                  for ( ii = 0; ii < kGCD; ii++ ) GCDbuffer[ii] = GCDbuffer2[ii];
00406              }
00407              else {
00408                  kGCD = 1; GCDbuffer[0] = 1;
00409              }
00410              k = REDLENG(j);
00411              if ( k < 0 ) k = -k;
00412              r3 += k;
00413              while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00414              if ( ( ( LCMbuffer[0] == 1 ) && ( kLCM == 1 ) ) ) {
00415                  for ( kLCM = 0; kLCM < k; kLCM++ )
00416                      LCMbuffer[kLCM] = r3[kLCM];
00417              }
00418              else if ( ( k != 1 ) || ( r3[0] != 1 ) ) {
00419                  if ( GcdLong(BHEAD LCMbuffer,kLCM, (UWORD *)r3,k,LCMb,&kkLCM) ) {
00420                      NumberFree(GCDbuffer,"execarg"); NumberFree(GCDbuffer2,"execarg");
00421                      NumberFree(LCMbuffer,"execarg"); NumberFree(LCMB,"execarg");
00422                      NumberFree(LCMc,"execarg");
00423                      goto execargerr;
00424                  }
00425                  DivLong((UWORD *)r3,k,LCMb,kkLCM,LCMb,&kkLCM,LCMc,&jLCM);
00426                  MulLong(LCMbuffer,kLCM,LCMb,kkLCM,LCMc,&jLCM);
00427                  for ( kLCM = 0; kLCM < jLCM; kLCM++ )
00428                      LCMbuffer[kLCM] = LCMc[kLCM];
00429              }
00430              else {} /* LCM doesn't change */
00431              r1 = r2;
00432  /*
00433          Now put the factor together: GCD/LCM

```

```

00434 */
00435
00436     r3 = (WORD *) (GCDbuffer);
00437     if ( kGCD == kLCM ) {
00438         for ( jGCD = 0; jGCD < kGCD; jGCD++ )
00439             r3[jGCD+kGCD] = LCMbuffer[jGCD];
00440         k = kGCD;
00441     }
00442     else if ( kGCD > kLCM ) {
00443         for ( jGCD = 0; jGCD < kLCM; jGCD++ )
00444             r3[jGCD+kGCD] = LCMbuffer[jGCD];
00445         for ( jGCD = kLCM; jGCD < kGCD; jGCD++ )
00446             r3[jGCD+kGCD] = 0;
00447         k = kGCD;
00448     }
00449     else {
00450         for ( jGCD = kGCD; jGCD < kLCM; jGCD++ )
00451             r3[jGCD] = 0;
00452         for ( jGCD = 0; jGCD < kLCM; jGCD++ )
00453             r3[jGCD+kLCM] = LCMbuffer[jGCD];
00454         k = kLCM;
00455     }
00456     j = 2*k+1;
00457 /*
00458     Now we have to correct the overall factor
00459 */
00460     if ( scale && ( factor == 0 || *factor > 0 ) )
00461         goto ScaledVariety;
00462 /*
00463     The if was added 28-nov-2012 to give MakeInteger also
00464     the (0) option.
00465 */
00466     if ( scale && ( factor == 0 || *factor ) ) {
00467         size = term[*term-1];
00468         size = REDLENG(size);
00469         if ( MulRat(BHEAD (UWORD *)rstop,size,(UWORD *)r3,k,
00470             (UWORD *)rstop,&size) ) goto execargerr;
00471         size = INCLENG(size);
00472         k = size < 0 ? -size: size;
00473         rstop[k-1] = size*sign;
00474         *term = (WORD)(rstop - term) + k;
00475     }
00476 }
00477 else {
00478     if ( factor && *factor >= 1 ) {
00479         r4 = r + *r;
00480         r1 = r + ARGHEAD;
00481         while ( r1 < r4 ) {
00482             r2 = r1 + *r1;
00483             r3 = r2 - ABS(r2[-1]);
00484             j = r3 - r1;
00485             r5 = factor;
00486             if ( j != *r5 ) { r1 = r2; continue; }
00487             r5++; r6 = r1+1;
00488             while ( --j > 0 ) {
00489                 if ( *r5 != *r6 ) break;
00490                 r5++; r6++;
00491             }
00492             if ( j > 0 ) { r1 = r2; continue; }
00493             break;
00494         }
00495         if ( r1 >= r4 ) continue;
00496     }
00497     else {
00498         r1 = r + ARGHEAD;
00499         r2 = r1 + *r1;
00500         r3 = r2 - ABS(r2[-1]);
00501     }
00502     if ( *r3 == 1 && r3[1] == 1 ) {
00503         if ( r2[-1] == 3 ) continue;
00504         if ( r2[-1] == -3 && type == TYPENORM3 ) continue;
00505     }
00506     action = 1;
00507     v[2] |= DIRTYFLAG;
00508     j = r2[-1];
00509     k = REDLENG(j);
00510     if ( j < 0 ) j = -j;
00511     if ( type == TYPENORM && scale && ( factor == 0 || *factor ) ) {
00512 /*
00513         Now we correct the overall factor
00514 */
00515         ScaledVariety;;
00516         size = term[*term-1];
00517         size = REDLENG(size);
00518         if ( scale > 0 ) {
00519             for ( jj = 0; jj < scale; jj++ ) {
00520                 if ( MulRat(BHEAD (UWORD *)rstop,size,(UWORD *)r3,k,

```

```

00521             (UWORD *)rstop,&size) ) goto execargerr;
00522         }
00523     }
00524     else {
00525         for ( jj = 0; jj > scale; jj-- ) {
00526             if ( DivRat(BHEAD (UWORD *)rstop,size,(UWORD *)r3,k,
00527                 (UWORD *)rstop,&size) ) goto execargerr;
00528         }
00529     }
00530     size = INCLENG(size);
00531     k = size < 0 ? -size: size;
00532     rstop[k-1] = size*sign;
00533     *term = (WORD)(rstop - term) + k;
00534 }
00535 }
00536 /*
00537 We generate a statement for adapting all terms in the
00538 argument successively
00539 */
00540 r4 = AddRHS(AT.ebufnum,1);
00541 while ( (r4+j+12) > CC->Top ) r4 = DoubleCbuffer(AT.ebufnum,r4,3);
00542 *r4++ = j+1;
00543 i = (j-1)/2; /* was (j-1)*2 ????? 17-oct-2017 */
00544 for ( k = 0; k < i; k++ ) *r4++ = r3[i+k];
00545 for ( k = 0; k < i; k++ ) *r4++ = r3[k];
00546 if ( ( type == TYPENORM3 ) || ( type == TYPENORM4 ) ) *r4++ = j*sign;
00547 else *r4++ = r3[j-1];
00548 *r4++ = 0;
00549 CC->rhs[CC->numrhs+1] = r4;
00550 CC->Pointer = r4;
00551 AT.mulpat[5] = CC->numrhs;
00552 AT.mulpat[7] = AT.ebufnum;
00553 }
00554 else if ( type == TYPEARGTOEXTRASymbol ) {
00555     WORD n;
00556     if ( r[0] < 0 ) {
00557         /* The argument is in the fast notation. */
00558         WORD tmp[Max(9,FUNHEAD+5)];
00559         switch ( r[0] ) {
00560             case -SNUMBER:
00561                 if ( r[1] == 0 ) {
00562                     tmp[0] = 0;
00563                 }
00564                 else {
00565                     tmp[0] = 4;
00566                     tmp[1] = ABS(r[1]);
00567                     tmp[2] = 1;
00568                     tmp[3] = r[1] > 0 ? 3 : -3;
00569                     tmp[4] = 0;
00570                 }
00571                 break;
00572             case -SYMBOL:
00573                 tmp[0] = 8;
00574                 tmp[1] = SYMBOL;
00575                 tmp[2] = 4;
00576                 tmp[3] = r[1];
00577                 tmp[4] = 1;
00578                 tmp[5] = 1;
00579                 tmp[6] = 1;
00580                 tmp[7] = 3;
00581                 tmp[8] = 0;
00582                 break;
00583             case -INDEX:
00584             case -VECTOR:
00585             case -MINVECTOR:
00586                 tmp[0] = 7;
00587                 tmp[1] = INDEX;
00588                 tmp[2] = 3;
00589                 tmp[3] = r[1];
00590                 tmp[4] = 1;
00591                 tmp[5] = 1;
00592                 tmp[6] = r[0] != -MINVECTOR ? 3 : -3;
00593                 tmp[7] = 0;
00594                 break;
00595             default:
00596                 if ( r[0] <= -FUNCTION ) {
00597                     tmp[0] = FUNHEAD+4;
00598                     tmp[1] = -r[0];
00599                     tmp[2] = FUNHEAD;
00600                     ZeroFillRange(tmp,3,1+FUNHEAD);
00601                     tmp[FUNHEAD+1] = 1;
00602                     tmp[FUNHEAD+2] = 1;
00603                     tmp[FUNHEAD+3] = 3;
00604                     tmp[FUNHEAD+4] = 0;
00605                     break;
00606                 }
00607             else {

```

```

00608                                     MLOCK(ErrorMessageLock);
00609                                     MesPrint("Unknown fast notation found (TYPEARGTOEXTRASymbol)");
00610                                     MUNLOCK(ErrorMessageLock);
00611                                     return(-1);
00612                                     }
00613                                     }
00614                                     n = FindSubexpression(tmp);
00615                                     }
00616                                     else {
00617                                         /*
00618                                         * NOTE: writing to r[r[0]] is legal. As long as we work
00619                                         * in a part of the term, at least the coefficient of
00620                                         * the term must follow.
00621                                         */
00622                                         WORD old_rr0 = r[r[0]];
00623                                         r[r[0]] = 0; /* zero-terminated */
00624                                         n = FindSubexpression(r+ARGHEAD);
00625                                         r[r[0]] = old_rr0;
00626                                     }
00627                                     /* Put the new argument in the work space. */
00628                                     if ( AT.WorkPointer+2 > AT.WorkTop ) {
00629                                         MLOCK(ErrorMessageLock);
00630                                         MesWork();
00631                                         MUNLOCK(ErrorMessageLock);
00632                                         return(-1);
00633                                     }
00634                                     r1 = AT.WorkPointer;
00635                                     if ( scale ) { /* means "tonumber" */
00636                                         r1[0] = -SNUMBER;
00637                                         r1[1] = n;
00638                                     }
00639                                     else {
00640                                         r1[0] = -SYMBOL;
00641                                         r1[1] = MAXVARIABLES-n;
00642                                     }
00643                                     /* We need r2, r3, m and k to shift the data. */
00644                                     r2 = r + (r[0] > 0 ? r[0] : r[0] <= -FUNCTION ? 1 : 2);
00645                                     r3 = r;
00646                                     m = r1+ARGHEAD+2;
00647                                     k = 2;
00648                                     goto do_shift;
00649                                     }
00650                                     r3 = r;
00651                                     AR.DeferFlag = 0;
00652                                     if ( *r > 0 ) {
00653                                         NewSort(BHEAD0);
00654                                         action = 1;
00655                                         r2 = r + *r;
00656                                         r += ARGHEAD;
00657                                         while ( r < r2 ) { /* Sum over the terms */
00658                                             m = AT.WorkPointer;
00659                                             j = *r;
00660                                             while ( --j >= 0 ) *m++ = *r++;
00661                                             r1 = AT.WorkPointer;
00662                                             AT.WorkPointer = m;
00663                                         } /*
00664                                         What to do with dummy indices?
00665                                         */
00666                                         if ( type == TYPENORM || type == TYPENORM2 || type == TYPENORM3 || type ==
TYPENORM4 ) {
00667                                             if ( MultDo(BHEAD r1,AT.mulp) ) goto execargerr;
00668                                             AT.WorkPointer = r1 + *r1;
00669                                         }
00670                                         if ( Generator(BHEAD r1,level) ) goto execargerr;
00671                                         AT.WorkPointer = r1;
00672                                     }
00673                                     }
00674                                     else {
00675                                         r2 = r + (( *r <= -FUNCTION ) ? 1:2);
00676                                         r1 = AT.WorkPointer;
00677                                         ToGeneral(r,r1,0);
00678                                         m = r1 + ARGHEAD;
00679                                         AT.WorkPointer = r1 + *r1;
00680                                         NewSort(BHEAD0);
00681                                         action = 1;
00682                                     } /*
00683                                     What to do with dummy indices?
00684                                     */
00685                                     if ( type == TYPENORM || type == TYPENORM2 || type == TYPENORM3 || type ==
TYPENORM4 ) {
00686                                         if ( MultDo(BHEAD m,AT.mulp) ) goto execargerr;
00687                                         AT.WorkPointer = m + *m;
00688                                     }
00689                                     if ( (*m != 0) && Generator(BHEAD m,level) ) goto execargerr;
00690                                     AT.WorkPointer = r1;
00691                                     }
00692                                     if ( EndSort(BHEAD AT.WorkPointer+ARGHEAD,1) < 0 ) goto execargerr;

```



```

00693         AR.DeferFlag = olddefer;
00694  /*
00695         Now shift the sorted entity over the old argument.
00696  */
00697         m = AT.WorkPointer+ARGHEAD;
00698         while ( *m ) m += *m;
00699         k = WORDDIF(m,AT.WorkPointer);
00700         *AT.WorkPointer = k;
00701         AT.WorkPointer[1] = 0;
00702         if ( ToFast(AT.WorkPointer,AT.WorkPointer) ) {
00703             if ( *AT.WorkPointer <= -FUNCTION ) k = 1;
00704             else k = 2;
00705         }
00706 do_shift:
00707         if ( *r3 > 0 ) j = k - *r3;
00708         else if ( *r3 <= -FUNCTION ) j = k - 1;
00709         else j = k - 2;
00710
00711         t[1] += j;
00712         action = 1;
00713         v[2] |= DIRTYFLAG;
00714         if ( j > 0 ) {
00715             r = m + j;
00716             while ( m > AT.WorkPointer ) *--r = *--m;
00717             AT.WorkPointer = r;
00718             m = term + *term;
00719             r = m + j;
00720             while ( m > r2 ) *--r = *--m;
00721         }
00722         else if ( j < 0 ) {
00723             r = r2 + j;
00724             r1 = term + *term;
00725             while ( r2 < r1 ) *r++ = *r2++;
00726         }
00727         r = r3;
00728         m = AT.WorkPointer;
00729         NCOPY(r,m,k);
00730         *term += j;
00731         rstop += j;
00732         CC->numrhs = oldnumrhs;
00733         CC->Pointer = CC->Buffer + oldcpointer;
00734     }
00735 }
00736 t += t[1];
00737 }
00738 /*
00739     If TYPENORM4, we allocated Number buffers before the above while loop. Free them.
00740 */
00741 if ( type == TYPENORM4 ) {
00742     NumberFree(GCDBuffer,"execarg");
00743     NumberFree(GCDBuffer2,"execarg");
00744     NumberFree(LCMBuffer,"execarg");
00745     NumberFree(LCMB,"execarg"); NumberFree(LCMc,"execarg");
00746 }
00747 if ( didpolyratfun ) {
00748     PolyFunDirty(BHEAD term);
00749     didpolyratfun = 0;
00750 }
00751 /*
00752 #] Argument detection :
00753 #[ SplitArg : + varieties
00754 */
00755 if ( ( type == TYPESPLITARG || type == TYPESPLITARG2
00756     || type == TYPESPLITFIRSTARG || type == TYPESPLITLASTARG ) &&
00757     AT.pWorkPointer > oldppointer ) {
00758     t = term+1;
00759     r1 = AT.WorkPointer + 1;
00760     lp = oldppointer;
00761     while ( t < rstop ) {
00762         if ( lp < AT.pWorkPointer && t == AT.pWorkSpace[lp] ) {
00763             v = t;
00764             m = t + FUNHEAD;
00765             r = t + t[1];
00766             r2 = r1; while ( t < m ) *r1++ = *t++;
00767             while ( m < r ) {
00768                 t = m;
00769                 NEXTARG(m)
00770                 if ( lp >= AT.pWorkPointer || t != AT.pWorkSpace[lp+1] ) {
00771                     if ( *t > 0 ) t[1] = 0;
00772                     while ( t < m ) *r1++ = *t++;
00773                     continue;
00774                 }
00775             }
00776             /*
00777                 Now we have a nontrivial argument that should be done.
00778             */
00779             lp += 2;
00780             action = 1;

```

```

00780         v[2] |= DIRTYFLAG;
00781         r3 = t + *t;
00782         t += ARGHEAD;
00783         if ( type == TYPESPLITFIRSTARG ) {
00784             r4 = r1; r5 = t; r7 = oldwork;
00785             *r1++ = *t + ARGHEAD;
00786             for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
00787             j = 0;
00788             while ( t < r3 ) {
00789                 i = *t;
00790                 if ( j == 0 ) {
00791                     NCOPY(r7,t,i)
00792                     j++;
00793                 }
00794                 else {
00795                     NCOPY(r1,t,i)
00796                 }
00797             }
00798             *r4 = r1 - r4;
00799             if ( j ) {
00800                 if ( ToFast(r4,r4) ) {
00801                     r1 = r4;
00802                     if ( *r1 > -FUNCTION ) r1++;
00803                     r1++;
00804                 }
00805                 r7 = oldwork;
00806                 while ( --j >= 0 ) {
00807                     r4 = r1; i = *r7;
00808                     *r1++ = i+ARGHEAD; *r1++ = 0;
00809                     FILLARG(r1);
00810                     NCOPY(r1,r7,i)
00811                     if ( ToFast(r4,r4) ) {
00812                         r1 = r4;
00813                         if ( *r1 > -FUNCTION ) r1++;
00814                         r1++;
00815                     }
00816                 }
00817             }
00818             t = r3;
00819         }
00820         else if ( type == TYPESPLITLASTARG ) {
00821             r4 = r1; r5 = t; r7 = oldwork;
00822             *r1++ = *t + ARGHEAD;
00823             for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
00824             j = 0;
00825             while ( t < r3 ) {
00826                 i = *t;
00827                 if ( t+i >= r3 ) {
00828                     NCOPY(r7,t,i)
00829                     j++;
00830                 }
00831                 else {
00832                     NCOPY(r1,t,i)
00833                 }
00834             }
00835             *r4 = r1 - r4;
00836             if ( j ) {
00837                 if ( ToFast(r4,r4) ) {
00838                     r1 = r4;
00839                     if ( *r1 > -FUNCTION ) r1++;
00840                     r1++;
00841                 }
00842                 r7 = oldwork;
00843                 while ( --j >= 0 ) {
00844                     r4 = r1; i = *r7;
00845                     *r1++ = i+ARGHEAD; *r1++ = 0;
00846                     FILLARG(r1);
00847                     NCOPY(r1,r7,i)
00848                     if ( ToFast(r4,r4) ) {
00849                         r1 = r4;
00850                         if ( *r1 > -FUNCTION ) r1++;
00851                         r1++;
00852                     }
00853                 }
00854             }
00855             t = r3;
00856         }
00857         else if ( factor == 0 || ( type == TYPESPLITARG2 && *factor == 0 ) ) {
00858             while ( t < r3 ) {
00859                 r4 = r1;
00860                 *r1++ = *t + ARGHEAD;
00861                 for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
00862                 i = *t;
00863                 while ( --i >= 0 ) *r1++ = *t++;
00864                 if ( ToFast(r4,r4) ) {
00865                     r1 = r4;
00866                     if ( *r1 > -FUNCTION ) r1++;

```

```

00867             r1++;
00868         }
00869     }
00870 }
00871 else if ( type == TYPESPLITARG2 ) {
00872 /*
00873     Here we better put the pattern matcher at work?
00874     Remember: there are no wildcards.
00875 */
00876     WORD *oRepFunList = AN.RepFunList;
00877     WORD *oWildMask = AT.WildMask, *oWildValue = AN.WildValue;
00878     AN.WildValue = AT.locwildvalue; AT.WildMask = AT.locwildvalue+2;
00879     AN.NumWild = 0;
00880     r4 = r1; r5 = t; r7 = oldwork;
00881     *r1++ = *t + ARGHEAD;
00882     for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
00883     j = 0;
00884     while ( t < r3 ) {
00885         AN.UseFindOnly = 0; oldwork2 = AT.WorkPointer;
00886         AN.RepFunList = r1;
00887         AT.WorkPointer = r1+AN.RepFunNum+2;
00888         i = *t;
00889         if ( FindRest(BHEAD t,factor) &&
00890             ( AN.UsedOtherFind || FindOnce(BHEAD t,factor) ) ) {
00891             NCOPY(r7,t,i)
00892             j++;
00893         }
00894         else if ( factor[0] == FUNHEAD+1 && factor[1] >= FUNCTION ) {
00895             WORD *rr1 = t+1, *rr2 = t+i;
00896             rr2 -= ABS(rr2[-1]);
00897             while ( rr1 < rr2 ) {
00898                 if ( *rr1 == factor[1] ) break;
00899                 rr1 += rr1[1];
00900             }
00901             if ( rr1 < rr2 ) {
00902                 NCOPY(r7,t,i)
00903                 j++;
00904             }
00905             else {
00906                 NCOPY(r1,t,i)
00907             }
00908         }
00909         else {
00910             NCOPY(r1,t,i)
00911         }
00912         AT.WorkPointer = oldwork2;
00913     }
00914     AN.RepFunList = oRepFunList;
00915     *r4 = r1 - r4;
00916     if ( j ) {
00917         if ( ToFast(r4,r4) ) {
00918             r1 = r4;
00919             if ( *r1 > -FUNCTION ) r1++;
00920             r1++;
00921         }
00922         r7 = oldwork;
00923         while ( --j >= 0 ) {
00924             r4 = r1; i = *r7;
00925             *r1++ = i+ARGHEAD; *r1++ = 0;
00926             FILLARG(r1);
00927             NCOPY(r1,r7,i)
00928             if ( ToFast(r4,r4) ) {
00929                 r1 = r4;
00930                 if ( *r1 > -FUNCTION ) r1++;
00931                 r1++;
00932             }
00933         }
00934     }
00935     t = r3;
00936     AT.WildMask = oWildMask; AN.WildValue = oWildValue;
00937 }
00938 else {
00939 /*
00940     This code deals with splitting off a single term
00941 */
00942     r4 = r1; r5 = t;
00943     *r1++ = *t + ARGHEAD;
00944     for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
00945     j = 0;
00946     while ( t < r3 ) {
00947         r6 = t + *t; r6 -= ABS(r6[-1]);
00948         if ( (r6 - t) == *factor ) {
00949             k = *factor - 1;
00950             for ( ; k > 0; k-- ) {
00951                 if ( t[k] != factor[k] ) break;
00952             }
00953             if ( k <= 0 ) {

```

```

00954             j = r3 - t; t += *t; continue;
00955         }
00956     }
00957     else if ( (r6 - t) == 1 && *factor == 0 ) {
00958         j = r3 - t; t += *t; continue;
00959     }
00960     i = *t;
00961     NCOPY(r1,t,i)
00962 }
00963 *r4 = r1 - r4;
00964 if ( j ) {
00965     if ( ToFast(r4,r4) ) {
00966         r1 = r4;
00967         if ( *r1 > -FUNCTION ) r1++;
00968         r1++;
00969     }
00970     t = r3 - j;
00971     r4 = r1;
00972     *r1++ = *t + ARGHEAD;
00973     for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
00974     i = *t;
00975     while ( --i >= 0 ) *r1++ = *t++;
00976     if ( ToFast(r4,r4) ) {
00977         r1 = r4;
00978         if ( *r1 > -FUNCTION ) r1++;
00979         r1++;
00980     }
00981 }
00982 t = r3;
00983 }
00984 }
00985 r2[1] = r1 - r2;
00986 }
00987 else {
00988     r = t + t[1];
00989     while ( t < r ) *r1++ = *t++;
00990 }
00991 }
00992 r = term + *term;
00993 while ( t < r ) *r1++ = *t++;
00994 m = AT.WorkPointer;
00995 i = m[0] = r1 - m;
00996 t = term;
00997 while ( --i >= 0 ) *t++ = *m++;
00998 if ( AT.WorkPointer < m ) AT.WorkPointer = m;
00999 }
01000 /*
01001 #] SplitArg :
01002 #[ FACTARG :
01003 */
01004 if ( ( type == TYPEFACTARG || type == TYPEFACTARG2 ) &&
01005 AT.pWorkPointer > oldppointer ) {
01006     t = term+1;
01007     r1 = AT.WorkPointer + 1;
01008     lp = oldppointer;
01009     while ( t < rstop ) {
01010         if ( lp < AT.pWorkPointer && AT.pWorkspace[lp] == t ) {
01011             v = t;
01012             m = t + FUNHEAD;
01013             r = t + t[1];
01014             r2 = r1; while ( t < m ) *r1++ = *t++;
01015             while ( m < r ) {
01016                 rr = t = m;
01017                 NEXTARG(m)
01018                 if ( lp >= AT.pWorkPointer || AT.pWorkspace[lp+1] != t ) {
01019                     if ( *t > 0 ) t[1] = 0;
01020                     while ( t < m ) *r1++ = *t++;
01021                     continue;
01022                 }
01023             }
01024             /*
01025             Now we have a nontrivial argument that should be studied.
01026             Try to find common factors.
01027             */
01028             lp += 2;
01029             if ( *t < 0 ) {
01030                 if ( factor && ( *factor == 0 && *t == -SNUMBER ) ) {
01031                     *r1++ = *t++;
01032                     if ( *t == 0 ) *r1++ = *t++;
01033                     else { *r1++ = 1; t++; }
01034                     continue;
01035                 }
01036                 else if ( factor && *factor == 4 && factor[2] == 1 ) {
01037                     if ( *t == -SNUMBER ) {
01038                         if ( factor[3] < 0 || t[1] >= 0 ) {
01039                             while ( t < m ) *r1++ = *t++;
01040                         }
01041                     }
01042                     else {

```

```

01041             *r1++ = -SNUMBER; *r1++ = -1;
01042             *r1++ = *t++; *r1++ = -*t++;
01043         }
01044     }
01045     else {
01046         while ( t < m ) *r1++ = *t++;
01047         *r1++ = -SNUMBER; *r1++ = 1;
01048     }
01049     continue;
01050 }
01051 else if ( *t == -MINVECTOR ) {
01052     if ( AC.OldFactArgFlag == NEWFACTARG ) {
01053         *r1++ = -SNUMBER; *r1++ = -1;
01054         *r1++ = -VECTOR; t++; *r1++ = *t++;
01055     }
01056     else {
01057         *r1++ = -VECTOR; t++; *r1++ = *t++;
01058         *r1++ = -SNUMBER; *r1++ = -1;
01059         *r1++ = -SNUMBER; *r1++ = 1;
01060     }
01061     continue;
01062 }
01063 }
01064 /*
01065 Now we have a nontrivial argument
01066 */
01067 r3 = t + *t;
01068 t += ARGHEAD; r5 = t; /* Store starting point */
01069 /* We have terms from r5 to r3 */
01070 if ( r5+*r5 == r3 && factor ) { /* One term only */
01071     if ( *factor == 0 ) {
01072         GETSTOP(t,r6);
01073         r9 = r1; *r1++ = 0; *r1++ = 1;
01074         FILLARG(r1);
01075         *r1++ = (r6-t)+3; t++;
01076         while ( t < r6 ) *r1++ = *t++;
01077         *r1++ = 1; *r1++ = 1; *r1++ = 3;
01078         *r9 = r1-r9;
01079         if ( ToFast(r9,r9) ) {
01080             if ( *r9 <= -FUNCTION ) r1 = r9+1;
01081             else r1 = r9+2;
01082         }
01083         t = r3; continue;
01084     }
01085     if ( factor[0] == 4 && factor[2] == 1 ) {
01086         GETSTOP(t,r6);
01087         r7 = r1; *r1++ = (r6-t)+3+ARGHEAD; *r1++ = 0;
01088         FILLARG(r1);
01089         *r1++ = (r6-t)+3; t++;
01090         while ( t < r6 ) *r1++ = *t++;
01091         *r1++ = 1; *r1++ = 1; *r1++ = 3;
01092         if ( ToFast(r7,r7) ) {
01093             if ( *r7 <= -FUNCTION ) r1 = r7+1;
01094             else r1 = r7+2;
01095         }
01096         if ( r3[-1] < 0 && factor[3] > 0 ) {
01097             *r1++ = -SNUMBER; *r1++ = -1;
01098             if ( r3[-1] == -3 && r3[-2] == 1
01099                 && ( r3[-3] & MAXPOSITIVE ) == r3[-3] ) {
01100                 *r1++ = -SNUMBER; *r1++ = r3[-3];
01101             }
01102             else {
01103                 *r1++ = (r3-r6)+1+ARGHEAD;
01104                 *r1++ = 0;
01105                 FILLARG(r1);
01106                 *r1++ = (r3-r6+1);
01107                 while ( t < r3 ) *r1++ = *t++;
01108                 r1[-1] = -r1[-1];
01109             }
01110         }
01111         else {
01112             if ( ( r3[-1] == -3 || r3[-1] == 3 )
01113                 && r3[-2] == 1
01114                 && ( r3[-3] & MAXPOSITIVE ) == r3[-3] ) {
01115                 *r1++ = -SNUMBER; *r1++ = r3[-3];
01116                 if ( r3[-1] < 0 ) r1[-1] = - r1[-1];
01117             }
01118             else {
01119                 *r1++ = (r3-r6)+1+ARGHEAD;
01120                 *r1++ = 0;
01121                 FILLARG(r1);
01122                 *r1++ = (r3-r6+1);
01123                 while ( t < r3 ) *r1++ = *t++;
01124             }
01125         }
01126         t = r3; continue;
01127     }
}

```

```

01128     }
01129  /*
01130     Now we take the first term and look for its pieces
01131     inside the other terms.
01132
01133     It is at this point that a more general factorization
01134     routine could take over (allowing for writing the output
01135     properly of course).
01136  */
01137     if ( AC.OldFactArgFlag == NEWFACTARG ) {
01138     if ( factor == 0 ) {
01139         WORD *oldworkpointer2 = AT.WorkPointer;
01140         AT.WorkPointer = r1 + AM.MaxTer+FUNHEAD;
01141         if ( ArgFactorize(BHEAD t-ARGHEAD,r1) < 0 ) {
01142             MesCall("ExecArg");
01143             return(-1);
01144         }
01145         AT.WorkPointer = oldworkpointer2;
01146         t = r3;
01147         while ( *r1 ) { NEXTARG(r1) }
01148     }
01149     else {
01150         rnext = t + *t;
01151         GETSTOP(t,r6);
01152         t++;
01153         t = r5; pow = 1;
01154         while ( t < r3 ) {
01155             t += *t; if ( t[-1] > 0 ) { pow = 0; break; }
01156         }
01157     /*
01158         We have to add here the code for computing the GCD
01159         and to divide it out.
01160
01161     #[ Numerical factor :
01162  */
01163         t = r5;
01164         EAscrat = (UWORD *) (TermMalloc("execarg"));
01165         if ( t + *t == r3 ) {
01166             if ( factor == 0 || *factor > 2 ) {
01167                 if ( pow > 0 ) {
01168                     *r1++ = -SNUMBER; *r1++ = -1;
01169                     t = r5;
01170                     while ( t < r3 ) {
01171                         t += *t; t[-1] = -t[-1];
01172                     }
01173                 }
01174                 t = rr; *r1++ = *t++; *r1++ = 1; t++;
01175                 COPYARG(r1,t);
01176                 while ( t < m ) *r1++ = *t++;
01177             }
01178         }
01179         else {
01180             GETSTOP(t,r6);
01181             ngcd = t[t[0]-1];
01182             i = abs(ngcd)-1;
01183             while ( --i >= 0 ) EAscrat[i] = r6[i];
01184             t += *t;
01185             while ( t < r3 ) {
01186                 GETSTOP(t,r6);
01187                 i = t[t[0]-1];
01188                 if ( AccumGCD(BHEAD EAscrat,&ngcd, (UWORD *)r6,i) ) goto execargerr;
01189                 if ( ngcd == 3 && EAscrat[0] == 1 && EAscrat[1] == 1 ) break;
01190                 t += *t;
01191             }
01192         /*
01193             if ( ngcd != 3 || EAscrat[0] != 1 || EAscrat[1] != 1 )
01194         */
01195         {
01196             if ( pow ) ngcd = -ngcd;
01197             t = r5; r9 = r1; *r1++ = t[-ARGHEAD]; *r1++ = 1;
01198             FILLARG(r1); ngcd = REDLENG(ngcd);
01199             while ( t < r3 ) {
01200                 GETSTOP(t,r6);
01201                 r7 = t; r8 = r1;
01202                 while ( r7 < r6 ) *r1++ = *r7++;
01203                 t += *t;
01204                 i = REDLENG(t[-1]);
01205                 if ( DivRat(BHEAD (UWORD *)r6,i,EAscrat,ngcd, (UWORD *)r1,&nq) ) goto
execargerr;
01206                 nq = INCLENG(nq);
01207                 i = ABS(nq)-1;
01208                 r1 += i; *r1++ = nq; *r8 = r1-r8;
01209             }
01210             *r9 = r1-r9;
01211             ngcd = INCLENG(ngcd);
01212             i = ABS(ngcd)-1;
01213             if ( factor && *factor == 0 ) {}

```

```

01214         else if ( ( factor && factor[0] == 4 && factor[2] == 1
01215 && factor[3] == -3 ) || pow == 0 ) {
01216             r9 = r1; *r1++ = ARGHEAD+2+i; *r1++ = 0;
01217             FILLARG(r1); *r1++ = i+2;
01218             for ( j = 0; j < i; j++ ) *r1++ = EAscrat[j];
01219             *r1++ = ngcd;
01220             if ( ToFast(r9,r9) ) r1 = r9+2;
01221         }
01222     else if ( factor && factor[0] == 4 && factor[2] == 1
01223 && factor[3] > 0 && pow ) {
01224         if ( ngcd < 0 ) ngcd = -ngcd;
01225         *r1++ = -SNUMBER; *r1++ = -1;
01226         r9 = r1; *r1++ = ARGHEAD+2+i; *r1++ = 0;
01227         FILLARG(r1); *r1++ = i+2;
01228         for ( j = 0; j < i; j++ ) *r1++ = EAscrat[j];
01229         *r1++ = ngcd;
01230         if ( ToFast(r9,r9) ) r1 = r9+2;
01231     }
01232     else {
01233         if ( ngcd < 0 ) ngcd = -ngcd;
01234         if ( pow ) { *r1++ = -SNUMBER; *r1++ = -1; }
01235         if ( ngcd != 3 || EAscrat[0] != 1 || EAscrat[1] != 1 ) {
01236             r9 = r1; *r1++ = ARGHEAD+2+i; *r1++ = 0;
01237             FILLARG(r1); *r1++ = i+2;
01238             for ( j = 0; j < i; j++ ) *r1++ = EAscrat[j];
01239             *r1++ = ngcd;
01240             if ( ToFast(r9,r9) ) r1 = r9+2;
01241         }
01242     }
01243 }
01244 /*
01245     #] Numerical factor :
01246     else {
01247 onetermnew;;
01248
01249         if ( factor == 0 || *factor > 2 ) {
01250             if ( pow > 0 ) {
01251                 *r1++ = -SNUMBER; *r1++ = -1;
01252                 t = r5;
01253                 while ( t < r3 ) {
01254                     t += *t; t[-1] = -t[-1];
01255                 }
01256             }
01257             t = rr; *r1++ = *t++; *r1++ = 1; t++;
01258             COPYARG(r1,t);
01259             while ( t < m ) *r1++ = *t++;
01260         }
01261     }
01262 onetermnew;;
01263 */
01264     }
01265     TermFree(EAscrat,"execarg");
01266 }
01267 }
01268 else { /* AC.OldFactArgFlag is ON */
01269 {
01270     WORD *mnnext, ncom;
01271     rnext = t + *t;
01272     GETSTOP(t,r6);
01273     t++;
01274     if ( factor == 0 ) {
01275         while ( t < r6 ) {
01276             /*
01277             #] SYMBOL :
01278             */
01279             if ( *t == SYMBOL ) {
01280                 r7 = t; r8 = t + t[1]; t += 2;
01281                 while ( t < r8 ) {
01282                     pow = t[1];
01283                     mm = rnext;
01284                     while ( mm < r3 ) {
01285                         mnnext = mm + *mm;
01286                         GETSTOP(mm,mstop); mm++;
01287                         while ( mm < mstop ) {
01288                             if ( *mm != SYMBOL ) mm += mm[1];
01289                             else break;
01290                         }
01291                     }
01292                     if ( *mm == SYMBOL ) {
01293                         mstop = mm + mm[1]; mm += 2;
01294                         while ( *mm != *t && mm < mstop ) mm += 2;
01295                         if ( mm >= mstop ) pow = 0;
01296                         else if ( pow > 0 && mm[1] > 0 ) {
01297                             if ( mm[1] < pow ) pow = mm[1];
01298                         }
01299                         else if ( pow < 0 && mm[1] < 0 ) {
01300                             if ( mm[1] > pow ) pow = mm[1];
01301                         }
01302                     }
01303                 }
01304             }

```

```

01301         else pow = 0;
01302     }
01303     else pow = 0;
01304     if ( pow == 0 ) break;
01305     mm = mnext;
01306 }
01307 if ( pow == 0 ) { t += 2; continue; }
01308 /*
01309 We have a factor
01310 */
01311 action = 1; i = pow;
01312 if ( i > 0 ) {
01313     while ( --i >= 0 ) {
01314         *r1++ = -SYMBOL;
01315         *r1++ = *t;
01316     }
01317 }
01318 else {
01319     while ( i++ < 0 ) {
01320         *r1++ = 8 + ARGHEAD;
01321         for ( j = 1; j < ARGHEAD; j++ ) *r1++ = 0;
01322         *r1++ = 8; *r1++ = SYMBOL;
01323         *r1++ = 4; *r1++ = *t; *r1++ = -1;
01324         *r1++ = 1; *r1++ = 1; *r1++ = 3;
01325     }
01326 }
01327 /*
01328 Now we have to remove the symbols
01329 */
01330 t[1] -= pow;
01331 mm = rnext;
01332 while ( mm < r3 ) {
01333     mnext = mm + *mm;
01334     GETSTOP(mm,mstop); mm++;
01335     while ( mm < mstop ) {
01336         if ( *mm != SYMBOL ) mm += mm[1];
01337         else break;
01338     }
01339     mstop = mm + mm[1]; mm += 2;
01340     while ( mm < mstop && *mm != *t ) mm += 2;
01341     mm[1] -= pow;
01342     mm = mnext;
01343 }
01344 t += 2;
01345 }
01346 }
01347 /*
01348 #] SYMBOL :
01349 #[ DOTPRODUCT :
01350 */
01351 else if ( *t == DOTPRODUCT ) {
01352     r7 = t; r8 = t + t[1]; t += 2;
01353     while ( t < r8 ) {
01354         pow = t[2];
01355         mm = rnext;
01356         while ( mm < r3 ) {
01357             mnext = mm + *mm;
01358             GETSTOP(mm,mstop); mm++;
01359             while ( mm < mstop ) {
01360                 if ( *mm != DOTPRODUCT ) mm += mm[1];
01361                 else break;
01362             }
01363             if ( *mm == DOTPRODUCT ) {
01364                 mstop = mm + mm[1]; mm += 2;
01365                 while ( ( *mm != *t || mm[1] != t[1] )
01366                     && mm < mstop ) mm += 3;
01367                 if ( mm >= mstop ) pow = 0;
01368                 else if ( pow > 0 && mm[2] > 0 ) {
01369                     if ( mm[2] < pow ) pow = mm[2];
01370                 }
01371                 else if ( pow < 0 && mm[2] < 0 ) {
01372                     if ( mm[2] > pow ) pow = mm[2];
01373                 }
01374                 else pow = 0;
01375             }
01376             else pow = 0;
01377             if ( pow == 0 ) break;
01378             mm = mnext;
01379         }
01380     if ( pow == 0 ) { t += 3; continue; }
01381 /*
01382 We have a factor
01383 */
01384 action = 1; i = pow;
01385 if ( i > 0 ) {
01386     while ( --i >= 0 ) {
01387         *r1++ = 9 + ARGHEAD;

```



```

01388         for ( j = 1; j < ARGHEAD; j++ ) *r1++ = 0;
01389         *r1++ = 9; *r1++ = DOTPRODUCT;
01390         *r1++ = 5; *r1++ = *t; *r1++ = t[1]; *r1++ = 1;
01391         *r1++ = 1; *r1++ = 1; *r1++ = 3;
01392     }
01393 }
01394 else {
01395     while ( i++ < 0 ) {
01396         *r1++ = 9 + ARGHEAD;
01397         for ( j = 1; j < ARGHEAD; j++ ) *r1++ = 0;
01398         *r1++ = 9; *r1++ = DOTPRODUCT;
01399         *r1++ = 5; *r1++ = *t; *r1++ = t[1]; *r1++ = -1;
01400         *r1++ = 1; *r1++ = 1; *r1++ = 3;
01401     }
01402 }
01403 /*
01404 Now we have to remove the dotproducts
01405 */
01406 t[2] -= pow;
01407 mm = rnext;
01408 while ( mm < r3 ) {
01409     mnext = mm + *mm;
01410     GETSTOP(mm,mstop); mm++;
01411     while ( mm < mstop ) {
01412         if ( *mm != DOTPRODUCT ) mm += mm[1];
01413         else break;
01414     }
01415     mstop = mm + mm[1]; mm += 2;
01416     while ( mm < mstop && ( *mm != *t
01417         || mm[1] != t[1] ) ) mm += 3;
01418     mm[2] -= pow;
01419     mm = mnext;
01420 }
01421 t += 3;
01422 }
01423 }
01424 /*
01425 #] DOTPRODUCT :
01426 #[ DELTA/VECTOR :
01427 */
01428 else if ( *t == DELTA || *t == VECTOR ) {
01429     r7 = t; r8 = t + t[1]; t += 2;
01430     while ( t < r8 ) {
01431         mm = rnext;
01432         pow = 1;
01433         while ( mm < r3 ) {
01434             mnext = mm + *mm;
01435             GETSTOP(mm,mstop); mm++;
01436             while ( mm < mstop ) {
01437                 if ( *mm != *r7 ) mm += mm[1];
01438                 else break;
01439             }
01440             if ( *mm == *r7 ) {
01441                 mstop = mm + mm[1]; mm += 2;
01442                 while ( ( *mm != *t || mm[1] != t[1] )
01443                     && mm < mstop ) mm += 2;
01444                 if ( mm >= mstop ) pow = 0;
01445             }
01446             else pow = 0;
01447             if ( pow == 0 ) break;
01448             mm = mnext;
01449         }
01450         if( pow == 0 ) { t += 2; continue; }
01451     }
01452     /*
01453     We have a factor
01454     */
01455     action = 1;
01456     *r1++ = 8 + ARGHEAD;
01457     for ( j = 1; j < ARGHEAD; j++ ) *r1++ = 0;
01458     *r1++ = 8; *r1++ = *r7;
01459     *r1++ = 4; *r1++ = *t; *r1++ = t[1];
01460     *r1++ = 1; *r1++ = 1; *r1++ = 3;
01461     /*
01462     Now we have to remove the delta's/vectors
01463     */
01464     mm = rnext;
01465     while ( mm < r3 ) {
01466         mnext = mm + *mm;
01467         GETSTOP(mm,mstop); mm++;
01468         while ( mm < mstop ) {
01469             if ( *mm != *r7 ) mm += mm[1];
01470             else break;
01471         }
01472         mstop = mm + mm[1]; mm += 2;
01473         while ( mm < mstop && (
01474             *mm != *t || mm[1] != t[1] ) ) mm += 2;
01475         *mm = mm[1] = NOINDEX;

```

```

01475             mm = mnext;
01476         }
01477         *t = t[1] = NOINDEX;
01478         t += 2;
01479     }
01480 }
01481 /*
01482 #] DELTA/VECTOR :
01483 #[ INDEX :
01484 */
01485     else if ( *t == INDEX ) {
01486         r7 = t; r8 = t + t[1]; t += 2;
01487         while ( t < r8 ) {
01488             mm = rnext;
01489             pow = 1;
01490             while ( mm < r3 ) {
01491                 mnext = mm + *mm;
01492                 GETSTOP(mm,mstop); mm++;
01493                 while ( mm < mstop ) {
01494                     if ( *mm != *r7 ) mm += mm[1];
01495                     else break;
01496                 }
01497                 if ( *mm == *r7 ) {
01498                     mstop = mm + mm[1]; mm += 2;
01499                     while ( *mm != *t
01500                         && mm < mstop ) mm++;
01501                     if ( mm >= mstop ) pow = 0;
01502                 }
01503                 else pow = 0;
01504                 if ( pow == 0 ) break;
01505                 mm = mnext;
01506             }
01507             if ( pow == 0 ) { t++; continue; }
01508 /*
01509 We have a factor
01510 */
01511 action = 1;
01512 /*
01513 The next looks like an error.
01514 We should have here a VECTOR or INDEX like object
01515
01516 *r1++ = 7 + ARGHEAD;
01517 for ( j = 1; j < ARGHEAD; j++ ) *r1++ = 0;
01518 *r1++ = 7; *r1++ = *r7;
01519 *r1++ = 3; *r1++ = *t;
01520 *r1++ = 1; *r1++ = 1; *r1++ = 3;
01521
01522 Replace this by: (11-apr-2007)
01523 */
01524 if ( *t < 0 ) { *r1++ = -VECTOR; }
01525 else { *r1++ = -INDEX; }
01526 *r1++ = *t;
01527 /*
01528 Now we have to remove the index
01529 */
01530 *t = NOINDEX;
01531 mm = rnext;
01532 while ( mm < r3 ) {
01533     mnext = mm + *mm;
01534     GETSTOP(mm,mstop); mm++;
01535     while ( mm < mstop ) {
01536         if ( *mm != *r7 ) mm += mm[1];
01537         else break;
01538     }
01539     mstop = mm + mm[1]; mm += 2;
01540     while ( mm < mstop &&
01541         *mm != *t ) mm += 1;
01542     *mm = NOINDEX;
01543     mm = mnext;
01544 }
01545 t += 1;
01546 }
01547 }
01548 /*
01549 #] INDEX :
01550 #[ FUNCTION :
01551 */
01552     else if ( *t >= FUNCTION ) {
01553 /*
01554 In the next code we should actually look inside
01555 the DENOMINATOR or EXPONENT for noncommuting objects
01556 */
01557 if ( *t >= FUNCTION &&
01558     functions[*t-FUNCTION].commute == 0 ) ncom = 0;
01559 else ncom = 1;
01560 if ( ncom ) {
01561     mm = r5 + 1;

```

```

01562         while ( mm < t && ( *mm == DUMMYFUN
01563         || *mm == DUMMYTEN ) ) mm += mm[1];
01564         if ( mm < t ) { t += t[1]; continue; }
01565     }
01566     mm = rnext; pow = 1;
01567     while ( mm < r3 ) {
01568         mnext = mm + *mm;
01569         GETSTOP(mm,mstop); mm++;
01570         while ( mm < mstop ) {
01571             if ( *mm == *t && mm[1] == t[1] ) {
01572                 for ( i = 2; i < t[1]; i++ ) {
01573                     if ( mm[i] != t[i] ) break;
01574                 }
01575                 if ( i >= t[1] )
01576                     { mm += mm[1]; goto nextmterm; }
01577             }
01578             if ( ncom && *mm != DUMMYFUN && *mm != DUMMYTEN )
01579                 { pow = 0; break; }
01580             mm += mm[1];
01581         }
01582         if ( mm >= mstop ) pow = 0;
01583         if ( pow == 0 ) break;
01584     nextmterm:
01585     }
01586     if ( pow == 0 ) { t += t[1]; continue; }
01587 /*
01588 Copy the function
01589 */
01590     action = 1;
01591     *r1++ = t[1] + 4 + ARGHEAD;
01592     for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
01593     *r1++ = t[1] + 4;
01594     for ( i = 0; i < t[1]; i++ ) *r1++ = t[i];
01595     *r1++ = 1; *r1++ = 1; *r1++ = 3;
01596 /*
01597 Now we have to take out the functions
01598 */
01599     mm = rnext;
01600     while ( mm < r3 ) {
01601         mnext = mm + *mm;
01602         GETSTOP(mm,mstop); mm++;
01603         while ( mm < mstop ) {
01604             if ( *mm == *t && mm[1] == t[1] ) {
01605                 for ( i = 2; i < t[1]; i++ ) {
01606                     if ( mm[i] != t[i] ) break;
01607                 }
01608                 if ( i >= t[1] ) {
01609                     if ( functions[*t-FUNCTION].spec > 0 )
01610                         *mm = DUMMYTEN;
01611                     else
01612                         *mm = DUMMYFUN;
01613                     mm += mm[1];
01614                     goto nextterm;
01615                 }
01616             }
01617             mm += mm[1];
01618         }
01619     nextterm:
01620     }
01621     if ( functions[*t-FUNCTION].spec > 0 )
01622         *t = DUMMYTEN;
01623     else
01624         *t = DUMMYFUN;
01625     action = 1;
01626     v[2] = DIRTYFLAG;
01627     t += t[1];
01628 }
01629 /*
01630 #] FUNCTION :
01631 */
01632     else {
01633         t += t[1];
01634     }
01635 }
01636 }
01637 t = r5; pow = 1;
01638 while ( t < r3 ) {
01639     t += *t; if ( t[-1] > 0 ) { pow = 0; break; }
01640 }
01641 /*
01642 We have to add here the code for computing the GCD
01643 and to divide it out.
01644 */
01645 /*
01646 #[ Numerical factor :
01647 */
01648     t = r5;

```

```

01649      EAscrat = (UWORD *) (TermMalloc("execarg"));
01650      if ( t + *t == r3 ) goto oneterm;
01651      GETSTOP(t,r6);
01652      ngcd = t[t[0]-1];
01653      i = abs(ngcd)-1;
01654      while ( --i >= 0 ) EAscrat[i] = r6[i];
01655      t += *t;
01656      while ( t < r3 ) {
01657          GETSTOP(t,r6);
01658          i = t[t[0]-1];
01659          if ( AccumGCD(BHEAD EAscrat,&ngcd,(UWORD *)r6,i) ) goto execargerr;
01660          if ( ngcd == 3 && EAscrat[0] == 1 && EAscrat[1] == 1 ) break;
01661          t += *t;
01662      }
01663      if ( ngcd != 3 || EAscrat[0] != 1 || EAscrat[1] != 1 ) {
01664          if ( pow ) ngcd = -ngcd;
01665          t = r5; r9 = r1; *r1++ = t[-ARGHEAD]; *r1++ = 1;
01666          FILLARG(r1); ngcd = REDLENG(ngcd);
01667          while ( t < r3 ) {
01668              GETSTOP(t,r6);
01669              r7 = t; r8 = r1;
01670              while ( r7 < r6 ) *r1++ = *r7++;
01671              t += *t;
01672              i = REDLENG(t[-1]);
01673              if ( DivRat(BHEAD (UWORD *)r6,i,EAscrat,ngcd,(UWORD *)r1,&nq) ) goto
execargerr;
01674              nq = INCLENG(nq);
01675              i = ABS(nq)-1;
01676              r1 += i; *r1++ = nq; *r8 = r1-r8;
01677          }
01678          *r9 = r1-r9;
01679          ngcd = INCLENG(ngcd);
01680          i = ABS(ngcd)-1;
01681          if ( factor && *factor == 0 ) {}
01682          else if ( ( factor && factor[0] == 4 && factor[2] == 1
01683          && factor[3] == -3 ) || pow == 0 ) {
01684              r9 = r1; *r1++ = ARGHEAD+2+i; *r1++ = 0;
01685              FILLARG(r1); *r1++ = i+2;
01686              for ( j = 0; j < i; j++ ) *r1++ = EAscrat[j];
01687              *r1++ = ngcd;
01688              if ( ToFast(r9,r9) ) r1 = r9+2;
01689          }
01690          else if ( factor && factor[0] == 4 && factor[2] == 1
01691          && factor[3] > 0 && pow ) {
01692              if ( ngcd < 0 ) ngcd = -ngcd;
01693              *r1++ = -SNUMBER; *r1++ = -1;
01694              r9 = r1; *r1++ = ARGHEAD+2+i; *r1++ = 0;
01695              FILLARG(r1); *r1++ = i+2;
01696              for ( j = 0; j < i; j++ ) *r1++ = EAscrat[j];
01697              *r1++ = ngcd;
01698              if ( ToFast(r9,r9) ) r1 = r9+2;
01699          }
01700          else {
01701              if ( ngcd < 0 ) ngcd = -ngcd;
01702              if ( pow ) { *r1++ = -SNUMBER; *r1++ = -1; }
01703              if ( ngcd != 3 || EAscrat[0] != 1 || EAscrat[1] != 1 ) {
01704                  r9 = r1; *r1++ = ARGHEAD+2+i; *r1++ = 0;
01705                  FILLARG(r1); *r1++ = i+2;
01706                  for ( j = 0; j < i; j++ ) *r1++ = EAscrat[j];
01707                  *r1++ = ngcd;
01708                  if ( ToFast(r9,r9) ) r1 = r9+2;
01709              }
01710          }
01711      }
01712      /*
01713      #] Numerical factor :
01714      */
01715      else {
01716      oneterm;;
01717          if ( factor == 0 || *factor > 2 ) {
01718              if ( pow > 0 ) {
01719                  *r1++ = -SNUMBER; *r1++ = -1;
01720                  t = r5;
01721                  while ( t < r3 ) {
01722                      t += *t; t[-1] = -t[-1];
01723                  }
01724              }
01725              t = rr; *r1++ = *t++; *r1++ = 1; t++;
01726              COPYARG(r1,t);
01727              while ( t < m ) *r1++ = *t++;
01728          }
01729      }
01730      TermFree(EAscrat,"execarg");
01731  }
01732  } /* AC.OldFactArgFlag */
01733  }
01734  /* r1 is fout in ons voorbeeld. */

```

```

01735         r2[1] = r1 - r2;
01736         action = 1;
01737         v[2] = DIRTYFLAG;
01738     }
01739     else {
01740         r = t + t[1];
01741         while ( t < r ) *r1++ = *t++;
01742     }
01743 }
01744 r = term + *term;
01745 while ( t < r ) *r1++ = *t++;
01746 m = AT.WorkPointer;
01747 i = m[0] = r1 - m;
01748 t = term;
01749 while ( --i >= 0 ) *t++ = *m++;
01750 if ( AT.WorkPointer < t ) AT.WorkPointer = t;
01751 }
01752 /*
01753 #] FACTARG :
01754 */
01755 AR.Cnumlhs = oldnumlhs;
01756 if ( action && Normalize(BHEAD term) ) goto execargerr;
01757 AT.WorkPointer = oldwork;
01758 if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
01759 AT.pWorkPointer = oldppointer;
01760 return(action);
01761 execargerr:
01762 AT.WorkPointer = oldwork;
01763 AT.pWorkPointer = oldppointer;
01764 MLOCK(ErrorMessageLock);
01765 MesCall("execarg");
01766 MUNLOCK(ErrorMessageLock);
01767 return(-1);
01768 }
01769
01770 /*
01771 #] execarg :
01772 #[ execterm :
01773 */
01774
01775 int execterm(PHEAD WORD *term, WORD level)
01776 {
01777     GETBIDENTITY
01778     CBUF *C = cbuf+AM.rbufnum;
01779     WORD oldnumlhs = AR.Cnumlhs;
01780     WORD maxisat = C->lhs[level][2];
01781     WORD *buffer1 = 0;
01782     WORD *oldworkpointer = AT.WorkPointer;
01783     WORD *t1, i;
01784     WORD olddeferflag = AR.DeferFlag, tryterm = 0;
01785     AR.DeferFlag = 0;
01786     do {
01787         AR.Cnumlhs = C->lhs[level][3];
01788         NewSort(BHEAD0);
01789     /*
01790         Normally for function arguments we do not use PolyFun/PolyRatFun.
01791         Hence NewSort sets the corresponding variables to zero.
01792         Here we overwrite that.
01793     */
01794     AN.FunSorts[AR.sLevel]->PolyFlag = ( AR.PolyFun != 0 ) ? AR.PolyFunType: 0;
01795     if ( AR.PolyFun == 0 ) { AN.FunSorts[AR.sLevel]->PolyFlag = 0; }
01796     else if ( AR.PolyFunType == 1 ) { AN.FunSorts[AR.sLevel]->PolyFlag = 1; }
01797     else if ( AR.PolyFunType == 2 ) {
01798         if ( AR.PolyFunExp == 2 ) AN.FunSorts[AR.sLevel]->PolyFlag = 1;
01799         else AN.FunSorts[AR.sLevel]->PolyFlag = 2;
01800     }
01801     if ( buffer1 ) {
01802         term = buffer1;
01803         while ( *term ) {
01804             t1 = oldworkpointer;
01805             i = *term; while ( --i >= 0 ) *t1++ = *term++;
01806             AT.WorkPointer = t1;
01807             if ( Generator(BHEAD oldworkpointer,level) ) goto exectermerr;
01808         }
01809     }
01810     else {
01811         if ( Generator(BHEAD term,level) ) goto exectermerr;
01812     }
01813     if ( buffer1 ) {
01814         if ( tryterm ) { TermFree(buffer1,"buffer in sort statement"); tryterm = 0; }
01815         else { M_free((void *)buffer1,"buffer in sort statement"); }
01816         buffer1 = 0;
01817     }
01818     AN.tryterm = 1;
01819     if ( EndSort(BHEAD (WORD *)((void *)&buffer1),2) < 0 ) goto exectermerr;
01820     tryterm = AN.tryterm; AN.tryterm = 0;
01821     level = AR.Cnumlhs;

```

```

01822     } while ( AR.Cnumlhs < maxisat );
01823     AR.Cnumlhs = oldnumlhs;
01824     AR.DeferFlag = olddeferflag;
01825     term = buffer1;
01826     while ( *term ) {
01827         t1 = oldworkpointer;
01828         i = *term; while ( --i >= 0 ) *t1++ = *term++;
01829         AT.WorkPointer = t1;
01830         if ( Generator(BHEAD oldworkpointer,level) ) goto exectermerr;
01831     }
01832     if ( tryterm ) { TermFree(buffer1,"buffer in term statement"); tryterm = 0; }
01833     else { M_free(buffer1,"buffer in term statement"); }
01834     buffer1 = 0;
01835     AT.WorkPointer = oldworkpointer;
01836     return(0);
01837 exectermerr:
01838     AT.WorkPointer = oldworkpointer;
01839     AR.DeferFlag = olddeferflag;
01840     MLOCK(ErrorMessageLock);
01841     MesCall("execterm");
01842     MUNLOCK(ErrorMessageLock);
01843     return(-1);
01844 }
01845
01846 /*
01847     #] execterm :
01848     #[ ArgumentImplode :
01849 */
01850
01851 int ArgumentImplode(PHEAD WORD *term, WORD *thelist)
01852 {
01853     GETBIDENTITY
01854     WORD *liststart, *liststop, *inlist;
01855     WORD *w, *t, *tend, *tstop, *tt, *ttstop, *ttt, ncount, i;
01856     int action = 0;
01857     liststop = thelist + thelist[1];
01858     liststart = thelist + 2;
01859     t = term;
01860     tend = t + *t;
01861     tstop = tend - ABS(tend[-1]);
01862     t++;
01863     while ( t < tstop ) {
01864         if ( *t >= FUNCTION ) {
01865             inlist = liststart;
01866             while ( inlist < liststop && *inlist != *t ) inlist += inlist[1];
01867             if ( inlist < liststop ) {
01868                 tt = t; ttstop = t + t[1]; w = AT.WorkPointer;
01869                 for ( i = 0; i < FUNHEAD; i++ ) *w++ = *tt++;
01870                 while ( tt < ttstop ) {
01871                     ncount = 0;
01872                     if ( *tt == -SNUMBER && tt[1] == 0 ) {
01873                         ncount = 1; ttt = tt; tt += 2;
01874                         while ( tt < ttstop && *tt == -SNUMBER && tt[1] == 0 ) {
01875                             ncount++; tt += 2;
01876                         }
01877                     }
01878                     if ( ncount > 0 ) {
01879                         if ( tt < ttstop && *tt == -SNUMBER && ( tt[1] == 1 || tt[1] == -1 ) ) {
01880                             *w++ = -SNUMBER;
01881                             *w++ = (ncount+1) * tt[1];
01882                             tt += 2;
01883                             action = 1;
01884                         }
01885                         else if ( ( tt[0] == tt[ARGHEAD] + ARGHEAD )
01886                             && ( ABS(tt[tt[0]-1]) == 3 )
01887                             && ( tt[tt[0]-2] == 1 )
01888                             && ( tt[tt[0]-3] == 1 ) ) { /* Single term with coef +/- 1 */
01889                             i = *tt; NCOPY(w,tt,i)
01890                             w[-3] = ncount+1;
01891                             action = 1;
01892                         }
01893                     }
01894                     else if ( *tt == -SYMBOL ) {
01895                         *w++ = ARGHEAD+8;
01896                         *w++ = 0;
01897                         FILLARG(w)
01898                         *w++ = 8;
01899                         *w++ = SYMBOL;
01900                         *w++ = tt[1];
01901                         *w++ = 1;
01902                         *w++ = ncount+1; *w++ = 1; *w++ = 3;
01903                         tt += 2;
01904                         action = 1;
01905                     }
01906                     else if ( *tt <= -FUNCTION ) {
01907                         *w++ = ARGHEAD+FUNHEAD+4;
01908                         *w++ = 0;
01909                         FILLARG(w)

```

```

01909             *w++ = -*tt++;
01910             *w++ = FUNHEAD+4;
01911             FILLFUN(w)
01912             *w++ = ncount+1; *w++ = 1; *w++ = 3;
01913             action = 1;
01914         }
01915         else {
01916             while ( ttt < tt ) *w++ = *ttt++;
01917             if ( tt < ttstop && *tt == -SNUMBER ) {
01918                 *w++ = *tt++; *w++ = *tt++;
01919             }
01920         }
01921     }
01922     else if ( *tt <= -FUNCTION ) {
01923         *w++ = *ttt++;
01924     }
01925     else if ( *tt < 0 ) {
01926         *w++ = *ttt++;
01927         *w++ = *ttt++;
01928     }
01929     else {
01930         i = *tt; NCOPY(w,tt,i)
01931     }
01932 }
01933 AT.WorkPointer[1] = w - AT.WorkPointer;
01934 while ( tt < tend ) *w++ = *tt++;
01935 ttt = AT.WorkPointer; tt = t;
01936 while ( ttt < w ) *ttt++ = *ttt++;
01937 term[0] = tt - term;
01938 AT.WorkPointer = tt;
01939 tend = tt; tstop = tt - ABS(tt[-1]);
01940 }
01941 }
01942 t += t[1];
01943 }
01944 if ( action ) {
01945     if ( Normalize(BHEAD term) ) return(-1);
01946 }
01947 return(0);
01948 }
01949
01950 /*
01951 #] ArgumentImplode :
01952 #[ ArgumentExplode :
01953 */
01954
01955 int ArgumentExplode(PHEAD WORD *term, WORD *thelist)
01956 {
01957     GETBIDENTITY
01958     WORD *liststart, *liststop, *inlist, *old;
01959     WORD *w, *t, *tend, *tstop, *tt, *ttstop, *ttt, ncount, i;
01960     int action = 0;
01961     LONG x;
01962     liststop = thelist + thelist[1];
01963     liststart = thelist + 2;
01964     t = term;
01965     tend = t + *t;
01966     tstop = tend - ABS(tend[-1]);
01967     t++;
01968     while ( t < tstop ) {
01969         if ( *t >= FUNCTION ) {
01970             inlist = liststart;
01971             while ( inlist < liststop && *inlist != *t ) inlist += inlist[1];
01972             if ( inlist < liststop ) {
01973                 tt = t; ttstop = t + t[1]; w = AT.WorkPointer;
01974                 for ( i = 0; i < FUNHEAD; i++ ) *w++ = *tt++;
01975                 while ( tt < ttstop ) {
01976                     if ( *tt == -SNUMBER && tt[1] != 0 ) {
01977                         if ( tt[1] < AM.MaxTer/((WORD)sizeof(WORD)*4)
01978                             && tt[1] > -(AM.MaxTer/((WORD)sizeof(WORD)*4))
01979                             && ( tt[1] > 1 || tt[1] < -1 ) ) {
01980                             ncount = ABS(tt[1]);
01981                             while ( ncount > 1 ) {
01982                                 *w++ = -SNUMBER; *w++ = 0; ncount--;
01983                             }
01984                             *w++ = -SNUMBER;
01985                             if ( tt[1] < 0 ) *w++ = -1;
01986                             else *w++ = 1;
01987                             tt += 2;
01988                             action = 1;
01989                         }
01990                     }
01991                     else {
01992                         *w++ = *tt++; *w++ = *tt++;
01993                     }
01994                 }
01995                 else if ( *tt <= -FUNCTION ) {
01996                     *w++ = *tt++;

```

```

01996         }
01997         else if ( *tt < 0 ) {
01998             *w++ = *t++;
01999             *w++ = *t++;
02000         }
02001         else if ( tt[0] == tt[ARGHEAD]+ARGHEAD ) {
02002             ttt = tt + tt[0] - 1;
02003             i = (ABS(ttt[0])-1)/2;
02004             if ( i > 1 ) {
02005 TooMany:
02006                 old = AN.currentTerm;
02007                 AN.currentTerm = term;
02008                 MesPrint("Too many arguments in output of ArgExplode");
02009                 MesPrint("Term = %t");
02010                 AN.currentTerm = old;
02011                 return(-1);
02012             }
02013             if ( ttt[-1] != 1 ) goto NoExplode;
02014             x = ttt[-2];
02015             if ( 2*x > (AT.WorkTop-w)-*term ) goto TooMany;
02016             ncount = x - 1;
02017             while ( ncount > 0 ) {
02018                 *w++ = -SNUMBER; *w++ = 0; ncount--;
02019             }
02020             ttt[-2] = 1;
02021             i = *tt; NCOPY(w,tt,i)
02022             action = 1;
02023         }
02024         else {
02025 NoExplode:
02026             i = *tt; NCOPY(w,tt,i)
02027         }
02028         AT.WorkPointer[1] = w - AT.WorkPointer;
02029         while ( tt < tend ) *w++ = *t++;
02030         ttt = AT.WorkPointer; tt = t;
02031         while ( ttt < w ) *t++ = *tt++;
02032         term[0] = tt - term;
02033         AT.WorkPointer = tt;
02034         tend = tt; tstop = tt - ABS(tt[-1]);
02035     }
02036 }
02037 t += t[1];
02038 }
02039 if ( action ) {
02040     if ( Normalize(BHEAD term) ) return(-1);
02041 }
02042 return(0);
02043 }
02044
02045 /*
02046 #] ArgumentExplode :
02047 #[ ArgFactorize :
02048 */
02049 #define NEWORDER
02050
02051 int ArgFactorize(PHEAD WORD *argin, WORD *argout)
02052 {
02053     /*
02054     #[ step 0 : Declarations and initializations
02055     */
02056     WORD *argfree, *argextra, *argcopy, *t, *tstop, *a, *a1, *a2;
02057     #ifndef NEWORDER
02058     WORD *tt;
02059     #endif
02060     WORD startebuf = cbuf[AT.ebufnum].numrhs,oldword;
02061     WORD oldsorttype = AR.SortType, numargs;
02062     int error = 0, action = 0, i, ii, number, sign = 1;
02063
02064     *argout = 0;
02065     /*
02066     #] step 0 :
02067     #[ step 1 : Take care of ordering
02068     */
02069     AR.SortType = SORTHIGHFIRST;
02070     if ( oldsorttype != AR.SortType ) {
02071         NewSort(BHEAD0);
02072         oldword = argin[*argin]; argin[*argin] = 0;
02073         t = argin+ARGHEAD;
02074         while ( *t ) {
02075             tstop = t + *t;
02076             if ( AN.ncmod != 0 ) {
02077                 if ( AN.ncmod != 1 || ( (WORD)AN.cmod[0] < 0 ) ) {
02078                     MLOCK(ErrorMessageLock);
02079                     MesPrint("Factorization modulus a number, greater than a WORD not implemented.");
02080                     MUNLOCK(ErrorMessageLock);
02081                     Terminate(-1);
02082                 }
02083             }
02084         }
02085     }

```



```

02098         if ( Modulus(t) ) {
02099             MLOCK(ErrorMessageLock);
02100             MesCall("ArgFactorize");
02101             MUNLOCK(ErrorMessageLock);
02102             Terminate(-1);
02103         }
02104         if ( !*t ) { t = tstop; continue; }
02105     }
02106     StoreTerm(BHEAD t);
02107     t = tstop;
02108 }
02109 /* par = 1, in case the arg has more than SubTermsInSmall terms */
02110 EndSort(BHEAD argin+ARGHEAD,1);
02111 argin[*argin] = oldword;
02112 }
02113 /*
02114 #] step 1 :
02115 #[ step 2 : take out the 'content'.
02116 */
02117 argfree = TakeArgContent(BHEAD argin,argout);
02118 {
02119     al = argout;
02120     while ( *al ) {
02121         if ( al[0] == -SNUMBER && ( al[1] == 1 || al[1] == -1 ) ) {
02122             if ( al[1] == -1 ) { sign = -sign; al[1] = 1; }
02123             if ( al[2] ) {
02124                 a = t = al+2; while ( *t ) NEXTARG(t);
02125                 i = t - al-2;
02126                 t = al; NCOPY(t,a,i);
02127                 *t = 0;
02128                 continue;
02129             }
02130             else {
02131                 al[0] = 0;
02132             }
02133             break;
02134         }
02135         else if ( al[0] == FUNHEAD+ARGHEAD+4 && al[ARGHEAD] == FUNHEAD+4
02136             && al[*al-1] == 3 && al[*al-2] == 1 && al[*al-3] == 1
02137             && al[ARGHEAD+1] >= FUNCTION ) {
02138             a = t = al+*al; while ( *t ) NEXTARG(t);
02139             i = t - a;
02140             *al = -al[ARGHEAD+1]; t = al+1; NCOPY(t,a,i);
02141             *t = 0;
02142         }
02143         NEXTARG(al);
02144     }
02145 }
02146 if ( argfree == 0 ) {
02147     argfree = argin;
02148 }
02149 else if ( argfree[0] == ( argfree[ARGHEAD]+ARGHEAD ) ) {
02150     Normalize(BHEAD argfree+ARGHEAD);
02151     argfree[0] = argfree[ARGHEAD]+ARGHEAD;
02152     argfree[1] = 0;
02153     if ( ( argfree[0] == ARGHEAD+4 ) && ( argfree[ARGHEAD+3] == 3 )
02154         && ( argfree[ARGHEAD+1] == 1 ) && ( argfree[ARGHEAD+2] == 1 ) ) {
02155         goto return0;
02156     }
02157 }
02158 else {
02159 /*
02160     The way we took out objects is rather brutish. We have to
02161     normalize
02162 */
02163     NewSort(BHEAD0);
02164     t = argfree+ARGHEAD;
02165     while ( *t ) {
02166         tstop = t + *t;
02167         Normalize(BHEAD t);
02168         StoreTerm(BHEAD t);
02169         t = tstop;
02170     }
02171     /* par = 1, in case the arg has more than SubTermsInSmall terms */
02172     EndSort(BHEAD argfree+ARGHEAD,1);
02173     t = argfree+ARGHEAD;
02174     while ( *t ) t += *t;
02175     *argfree = t - argfree;
02176 }
02177 /*
02178 #] step 2 :
02179 #[ step 3 : look whether we have done this one already.
02180 */
02181 if ( ( number = FindArg(BHEAD argfree) ) != 0 ) {
02182     if ( number > 0 ) t = cbuf[AT.fbufnum].rhs[number-1];
02183     else t = cbuf[AC.ffbufnum].rhs[-number-1];
02184 /*

```

```

02185         Now position on the result. Remember we have in the cache:
02186             inputarg,0,outputargs,0
02187         t is currently at inputarg. *inputarg is always positive.
02188         in principle this holds also for the arguments in the output
02189         but we take no risks here (in case of future developments).
02190     */
02191     t += *t; t++;
02192     tstop = t;
02193     ii = 0;
02194     while ( *tstop ) {
02195         if ( *tstop == -SNUMBER && tstop[1] == -1 ) {
02196             sign = -sign; ii += 2;
02197         }
02198         NEXTARG(tstop);
02199     }
02200     a = argout; while ( *a ) NEXTARG(a);
02201     #ifndef NEWORDER
02202     if ( sign == -1 ) { *a++ = -SNUMBER; *a++ = -1; *a = 0; sign = 1; }
02203     #endif
02204     i = tstop - t - ii;
02205     ii = a - argout;
02206     a2 = a; a1 = a + i;
02207     *a1 = 0;
02208     while ( ii > 0 ) { *--a1 = *--a2; ii--; }
02209     a = argout;
02210     while ( *t ) {
02211         if ( *t == -SNUMBER && t[1] == -1 ) { t += 2; }
02212         else { COPY1ARG(a,t) }
02213     }
02214     goto return0;
02215 }
02216 /*
02217 #] step 3 :
02218 #[ step 4 : invoke ConvertToPoly
02219
02220         We make a copy first in case there are no factors
02221 */
02222 argcopy = TermMalloc("argcopy");
02223 for ( i = 0; i <= *argfree; i++ ) argcopy[i] = argfree[i];
02224
02225 tstop = argfree + *argfree;
02226 {
02227     WORD sumcommu = 0;
02228     t = argfree + ARGHEAD;
02229     while ( t < tstop ) {
02230         sumcommu += DoesCommu(t);
02231         t += *t;
02232     }
02233     if ( sumcommu > 1 ) {
02234         MesPrint("ERROR: Cannot factorize an argument with more than one noncommuting object");
02235         Terminate(-1);
02236     }
02237 }
02238 t = argfree + ARGHEAD;
02239
02240 while ( t < tstop ) {
02241     if ( ( t[1] != SYMBOL ) && ( *t != (ABS(t[*t-1])+1) ) ) {
02242         action = 1; break;
02243     }
02244     t += *t;
02245 }
02246 if ( action ) {
02247     t = argfree + ARGHEAD;
02248     argextra = AT.WorkPointer;
02249     NewSort(BHEAD0);
02250     while ( t < tstop ) {
02251         if ( LocalConvertToPoly(BHEAD t,argextra,startebuf,0) < 0 ) {
02252             error = -1;
02253             goto:
02254             AR.SortType = oldsorttype;
02255             TermFree(argcopy,"argcopy");
02256             if ( argfree != argin ) TermFree(argfree,"argfree");
02257             MesCall("ArgFactorize");
02258             Terminate(-1);
02259             return(-1);
02260         }
02261         StoreTerm(BHEAD argextra);
02262         t += *t; argextra += *argextra;
02263     }
02264     /* par = 1, in case the arg has more than SubTermsInSmall terms */
02265     if ( EndSort(BHEAD argfree+ARGHEAD,1) < 0 ) { error = -2; goto: }
02266     t = argfree + ARGHEAD;
02267     while ( *t > 0 ) t += *t;
02268     *argfree = t - argfree;
02269 }
02270 /*
02271 #] step 4 :

```

```

02272     #[ step 5 : If not in the tables, we have to do this by hard work.
02273     */
02274
02275     a = argout;
02276     while ( *a ) NEXTARG(a);
02277     if ( poly_factorize_argument(BHEAD argfree,a) < 0 ) {
02278         MesCall("ArgFactorize");
02279         error = -1;
02280     }
02281     /*
02282     #[ step 5 :
02283     #[ step 6 : use now ConvertFromPoly
02284
02285         Be careful: there should be more than one argument now.
02286     */
02287     if ( error == 0 && action ) {
02288         a1 = a; NEXTARG(a1);
02289         if ( *a1 != 0 ) {
02290             CBUF *C = cbuf+AC.cbunum;
02291             CBUF *CC = cbuf+AT.ebunum;
02292             WORD *oldworkpointer = AT.WorkPointer;
02293             WORD *argcopy2 = TermMalloc("argcopy2"), *a1, *a2;
02294             a1 = a; a2 = argcopy2;
02295             while ( *a1 ) {
02296                 if ( *a1 < 0 ) {
02297                     if ( *a1 > -FUNCTION ) *a2++ = *a1++;
02298                     *a2++ = *a1++; *a2 = 0;
02299                     continue;
02300                 }
02301                 t = a1 + ARGHEAD;
02302                 tstop = a1 + *a1;
02303                 argextra = AT.WorkPointer;
02304                 NewSort(BHEAD0);
02305                 while ( t < tstop ) {
02306                     if ( ConvertFromPoly(BHEAD t,argextra,numxsymbol,CC->numrhs-startebuf+numxsymbol
02307                     ,startebuf-numxsymbol,1) <= 0 ) {
02308                         TermFree(argcopy2,"argcopy2");
02309                         LowerSortLevel();
02310                         error = -3;
02311                         goto getout;
02312                     }
02313                     t += *t;
02314                     AT.WorkPointer = argextra + *argextra;
02315                 /*
02316                 ConvertFromPoly leaves terms with subexpressions. Hence:
02317                 */
02318                 if ( Generator(BHEAD argextra,C->numlhs) ) {
02319                     TermFree(argcopy2,"argcopy2");
02320                     LowerSortLevel();
02321                     error = -4;
02322                     goto getout;
02323                 }
02324                 AT.WorkPointer = oldworkpointer;
02325                 /* par = 1, in case the factor has more than SubTermsInSmall terms */
02326                 if ( EndSort(BHEAD a2+ARGHEAD,1) < 0 ) { error = -5; goto getout; }
02327                 t = a2+ARGHEAD; while ( *t ) t += *t;
02328                 *a2 = t - a2; a2[1] = 0; ZEROARG(a2);
02329                 ToFast(a2,a2); NEXTARG(a2);
02330                 a1 = tstop;
02331             }
02332             i = a2 - argcopy2;
02333             a2 = argcopy2; a1 = a;
02334             NCOPY(a1,a2,i);
02335             *a1 = 0;
02336             TermFree(argcopy2,"argcopy2");
02337         /*
02338         Erase the entries we made temporarily in cbuf[AT.ebunum]
02339         */
02340         /*
02341         CC->numrhs = startebuf;
02342         }
02343         else { /* no factorization. recover the argument from before step 3. */
02344             for ( i = 0; i <= *argcopy; i++ ) a[i] = argcopy[i];
02345         }
02346     }
02347     /*
02348     #[ step 6 :
02349     #[ step 7 : Add this one to the tables.
02350
02351         Possibly drop some elements in the tables
02352         when they become too full.
02353     */
02354     if ( error == 0 && AN.ncmod == 0 ) {
02355         if ( InsertArg(BHEAD argcopy,a,0) < 0 ) { error = -1; }
02356     }
02357     /*
02358     #[ step 7 :

```

```

02359      #[ step 8 : Clean up and return.
02360
02361      Change the order of the arguments in argout and a.
02362      Use argcopy as spare space.
02363  */
02364      ii = a - argout;
02365      for ( i = 0; i < ii; i++ ) argcopy[i] = argout[i];
02366      a1 = a;
02367      while ( *a1 ) {
02368          if ( *a1 == -SNUMBER && a1[1] < 0 ) {
02369              sign = -sign; a1[1] = -a1[1];
02370              if ( a1[1] == 1 ) {
02371                  a2 = a1+2; while ( *a2 ) NEXTARG(a2);
02372                  i = a2-a1-2; a2 = a1+2;
02373                  NCOPY(a1,a2,i);
02374                  *a1 = 0;
02375              }
02376              while ( *a1 ) NEXTARG(a1);
02377              break;
02378          }
02379          else {
02380              if ( *a1 > 0 && *a1 == a1[ARGHEAD]+ARGHEAD && a1[*a1-1] < 0 ) {
02381                  a1[*a1-1] = -a1[*a1-1]; sign = -sign;
02382              }
02383              if ( *a1 == ARGHEAD+4 && a1[ARGHEAD+1] == 1 && a1[ARGHEAD+2] == 1 ) {
02384                  a2 = a1+ARGHEAD+4; while ( *a2 ) NEXTARG(a2);
02385                  i = a2-a1-ARGHEAD-4; a2 = a1+ARGHEAD+4;
02386                  NCOPY(a1,a2,i);
02387                  *a1 = 0;
02388                  break;
02389              }
02390              while ( *a1 ) NEXTARG(a1);
02391              break;
02392          }
02393          NEXTARG(a1);
02394      }
02395      i = a1 - a;
02396      a2 = argout;
02397      NCOPY(a2,a,i);
02398      for ( i = 0; i < ii; i++ ) *a2++ = argcopy[i];
02399  #ifndef NEWORDER
02400      if ( sign == -1 ) { *a2++ = -SNUMBER; *a2++ = -1; sign = 1; }
02401  #endif
02402      *a2 = 0;
02403      TermFree(argcopy,"argcopy");
02404      return 0;
02405      if ( argfree != argin ) TermFree(argfree,"argfree");
02406      if ( oldsorttype != AR.SortType ) {
02407          AR.SortType = oldsorttype;
02408          a = argout;
02409          while ( *a ) {
02410              if ( *a > 0 ) {
02411                  NewSort(BHEAD0);
02412                  oldword = a[*a]; a[*a] = 0;
02413                  t = a+ARGHEAD;
02414                  while ( *t ) {
02415                      tstop = t + *t;
02416                      StoreTerm(BHEAD t);
02417                      t = tstop;
02418                  }
02419                  /* par = 1, in case the factor has more than SubTermsInSmall terms */
02420                  EndSort(BHEAD a+ARGHEAD,1);
02421                  a[*a] = oldword;
02422                  a += *a;
02423              }
02424              else { NEXTARG(a); }
02425          }
02426      }
02427  #ifdef NEWORDER
02428      t = argout; numargs = 0;
02429      while ( *t ) {
02430          tt = t;
02431          NEXTARG(t);
02432          if ( *tt == ABS(t[-1])+1+ARGHEAD && sign == -1 ) { t[-1] = -t[-1]; sign = 1; }
02433          else if ( *tt == -SNUMBER && sign == -1 ) { tt[1] = -tt[1]; sign = 1; }
02434          numargs++;
02435      }
02436      if ( sign == -1 ) {
02437          *t++ = -SNUMBER; *t++ = -1; *t = 0; sign = 1; numargs++;
02438      }
02439  #else
02440  /*
02441      Now we have to sort the arguments
02442      First have the number of 'nontrivial/nonnumerical' arguments
02443      Then make a piece of code like in FullSymmetrize with that number
02444      of arguments to be symmetrized.
02445      Put a function in front

```

```

02446     Call the Symmetrize routine
02447  */
02448     t = argout; numargs = 0;
02449     while ( *t && *t != -SNUMBER && ( *t < 0 || ( ABS(t[*t-1]) != *t-1 ) ) ) {
02450         NEXTARG(t);
02451         numargs++;
02452     }
02453 #endif
02454     if ( numargs > 1 ) {
02455         WORD *Lijst;
02456         WORD x[3];
02457         x[0] = argout[-FUNHEAD];
02458         x[1] = argout[-FUNHEAD+1];
02459         x[2] = argout[-FUNHEAD+2];
02460         while ( *t ) { NEXTARG(t); }
02461         argout[-FUNHEAD] = SQRTFUNCTION;
02462         argout[-FUNHEAD+1] = t-argout+FUNHEAD;
02463         argout[-FUNHEAD+2] = 0;
02464         AT.WorkPointer = t+1;
02465         Lijst = AT.WorkPointer;
02466         for ( i = 0; i < numargs; i++ ) Lijst[i] = i;
02467         AT.WorkPointer += numargs;
02468         error = Symmetrize(BHEAD argout-FUNHEAD,Lijst,numargs,1,SYMMETRIC);
02469         AT.WorkPointer = Lijst;
02470         argout[-FUNHEAD] = x[0];
02471         argout[-FUNHEAD+1] = x[1];
02472         argout[-FUNHEAD+2] = x[2];
02473 #ifdef NEWORDER
02474  /*
02475         Now we have to get a potential numerical argument to the first position
02476  */
02477         tstop = argout; while ( *tstop ) { NEXTARG(tstop); }
02478         t = argout; number = 0;
02479         while ( *t ) {
02480             tt = t; NEXTARG(tt);
02481             if ( *tt == -SNUMBER ) {
02482                 if ( number == 0 ) break;
02483                 x[0] = tt[1];
02484                 while ( tt > argout ) { ---t = ---tt; }
02485                 argout[0] = -SNUMBER; argout[1] = x[0];
02486                 break;
02487             }
02488             else if ( *tt == ABS(t[-1])+1+ARGHEAD ) {
02489                 if ( number == 0 ) break;
02490                 ii = t - tt;
02491                 for ( i = 0; i < ii; i++ ) tstop[i] = tt[i];
02492                 while ( tt > argout ) { ---t = ---tt; }
02493                 for ( i = 0; i < ii; i++ ) argout[i] = tstop[i];
02494                 *tstop = 0;
02495                 break;
02496             }
02497             number++;
02498         }
02499 #endif
02500     }
02501  /*
02502     #] step 8 :
02503  */
02504     return(error);
02505 }
02506
02507  /*
02508     #] ArgFactorize :
02509     #[ FindArg :
02510  */
02519 WORD FindArg(PHEAD WORD *a)
02520 {
02521     int number;
02522     if ( AN.ncmod != 0 ) return(0); /* no room for mod stuff */
02523     number = FindTree(AT.fbufnum,a);
02524     if ( number >= 0 ) return(number+1);
02525     number = FindTree(AC.ffbufnum,a);
02526     if ( number >= 0 ) return(-number-1);
02527     return(0);
02528 }
02529
02530  /*
02531     #] FindArg :
02532     #[ InsertArg :
02533  */
02543 int InsertArg(PHEAD WORD *argin, WORD *argout,int par)
02544 {
02545     CBUF *C;
02546     WORD *a, i, bufnum;
02547     if ( par == 0 ) {
02548         bufnum = AT.fbufnum;
02549         C = cbuf+bufnum;

```

```

02550         if ( C->numrhs >= (C->maxrhs-2) ) CleanupArgCache(BHEAD AT.fbufnum);
02551     }
02552     else if ( par == 1 ) {
02553         bufnum = AC.fbufnum;
02554         C = cbuf+bufnum;
02555     }
02556     else { return(-1); }
02557     AddRHS(bufnum,1);
02558     AddNtoC(bufnum,*argin,argin,1);
02559     AddToCB(C,0)
02560     a = argout; while ( *a ) NEXTARG(a);
02561     i = a - argout;
02562     AddNtoC(bufnum,i,argout,2);
02563     AddToCB(C,0)
02564     return(InsTree(bufnum,C->numrhs));
02565 }
02566
02567 /*
02568 #] InsertArg :
02569 #[ CleanupArgCache :
02570 */
02571 int CleanupArgCache(PHEAD WORD bufnum)
02572 {
02573     CBUF *C = cbuf + bufnum;
02574     COMPTREE *boomlijst = C->boomlijst;
02575     LONG *weights = (LONG *)Malloca(2*(C->numrhs+1)*sizeof(LONG),"CleanupArgCache");
02576     LONG w, whalf, *extraweights;
02577     WORD *a, *to, *from;
02578     int i,j,k;
02579     for ( i = 1; i <= C->numrhs; i++ ) {
02580         weights[i] = ((LONG)i) * (boomlijst[i].usage);
02581     }
02582     /*
02583         Now sort the weights and determine the halfway weight
02584     */
02585     extraweights = weights+C->numrhs+1;
02586     SortWeights(weights+1,extraweights,C->numrhs);
02587     whalf = weights[C->numrhs/2+1];
02588     /*
02589         We should drop everybody with a weight < whalf.
02590     */
02591     to = C->Buffer;
02592     k = 1;
02593     for ( i = 1; i <= C->numrhs; i++ ) {
02594         from = C->rhs[i]; w = ((LONG)i) * (boomlijst[i].usage);
02595         if ( w >= whalf ) {
02596             if ( i < C->numrhs-1 ) {
02597                 if ( to == from ) {
02598                     to = C->rhs[i+1];
02599                 }
02600                 else {
02601                     j = C->rhs[i+1] - from;
02602                     C->rhs[k] = to;
02603                     NCOPY(to,from,j)
02604                 }
02605             }
02606             else if ( to == from ) {
02607                 to += *to + 1; while ( *to ) NEXTARG(to); to++;
02608             }
02609             else {
02610                 a = from; a += *a+1; while ( *a ) NEXTARG(a); a++;
02611                 j = a - from;
02612                 C->rhs[k] = to;
02613                 NCOPY(to,from,j)
02614             }
02615             weights[k++] = boomlijst[i].usage;
02616         }
02617     }
02618     C->numrhs = --k;
02619     C->Pointer = to;
02620     /*
02621         Next we need to rebuild the tree.
02622         Note that this can probably be done much faster by using the
02623         remains of the old tree !!!!!!!!!!!!!!!
02624     */
02625     ClearTree(AT.fbufnum);
02626     for ( i = 1; i <= k; i++ ) {
02627         InsTree(AT.fbufnum,i);
02628         boomlijst[i].usage = weights[i];
02629     }
02630     /*
02631         And cleanup
02632     */
02633     M_free(weights,"CleanupArgCache");
02634     return(0);
02635 }
02636
02637
02638

```

```

02644 /*
02645 #] CleanupArgCache :
02646 #[ ArgSymbolMerge :
02647 */
02648
02649 int ArgSymbolMerge(WORD *t1, WORD *t2)
02650 {
02651     WORD *t1e = t1+t1[1];
02652     WORD *t2e = t2+t2[1];
02653     WORD *t1a = t1+2;
02654     WORD *t2a = t2+2;
02655     WORD *t3;
02656     while ( t1a < t1e && t2a < t2e ) {
02657         if ( *t1a < *t2a ) {
02658             if ( t1a[1] >= 0 ) {
02659                 t3 = t1a+2;
02660                 while ( t3 < t1e ) { t3[-2] = *t3; t3[-1] = t3[1]; t3 += 2; }
02661                 t1e -= 2;
02662             }
02663             else t1a += 2;
02664         }
02665         else if ( *t1a > *t2a ) {
02666             if ( t2a[1] >= 0 ) t2a += 2;
02667             else {
02668                 t3 = t1e;
02669                 while ( t3 > t1a ) { *t3 = t3[-2]; t3[1] = t3[-1]; t3 -= 2; }
02670                 *t1a++ = *t2a++;
02671                 *t1a++ = *t2a++;
02672                 t1e += 2;
02673             }
02674         }
02675         else {
02676             if ( t2a[1] < t1a[1] ) t1a[1] = t2a[1];
02677             t1a += 2; t2a += 2;
02678         }
02679     }
02680     while ( t2a < t2e ) {
02681         if ( t2a[1] < 0 ) {
02682             *t1a++ = *t2a++;
02683             *t1a++ = *t2a++;
02684         }
02685         else t2a += 2;
02686     }
02687     while ( t1a < t1e ) {
02688         if ( t1a[1] >= 0 ) {
02689             t3 = t1a+2;
02690             while ( t3 < t1e ) { t3[-2] = *t3; t3[-1] = t3[1]; t3 += 2; }
02691             t1e -= 2;
02692         }
02693         else t1a += 2;
02694     }
02695     t1[1] = t1a - t1;
02696     return(0);
02697 }
02698
02699 /*
02700 #] ArgSymbolMerge :
02701 #[ ArgDotproductMerge :
02702 */
02703
02704 int ArgDotproductMerge(WORD *t1, WORD *t2)
02705 {
02706     WORD *t1e = t1+t1[1];
02707     WORD *t2e = t2+t2[1];
02708     WORD *t1a = t1+2;
02709     WORD *t2a = t2+2;
02710     WORD *t3;
02711     while ( t1a < t1e && t2a < t2e ) {
02712         if ( *t1a < *t2a || ( *t1a == *t2a && t1a[1] < t2a[1] ) ) {
02713             if ( t1a[2] >= 0 ) {
02714                 t3 = t1a+3;
02715                 while ( t3 < t1e ) { t3[-3] = *t3; t3[-2] = t3[1]; t3[-1] = t3[2]; t3 += 3; }
02716                 t1e -= 3;
02717             }
02718             else t1a += 3;
02719         }
02720         else if ( *t1a > *t2a || ( *t1a == *t2a && t1a[1] > t2a[1] ) ) {
02721             if ( t2a[2] >= 0 ) t2a += 3;
02722             else {
02723                 t3 = t1e;
02724                 while ( t3 > t1a ) { *t3 = t3[-3]; t3[1] = t3[-2]; t3[2] = t3[-1]; t3 -= 3; }
02725                 *t1a++ = *t2a++;
02726                 *t1a++ = *t2a++;
02727                 *t1a++ = *t2a++;
02728                 t1e += 3;
02729             }
02730         }
02731     }

```

```

02731         else {
02732             if ( t2a[2] < t1a[2] ) t1a[2] = t2a[2];
02733             t1a += 3; t2a += 3;
02734         }
02735     }
02736     while ( t2a < t2e ) {
02737         if ( t2a[2] < 0 ) {
02738             *t1a++ = *t2a++;
02739             *t1a++ = *t2a++;
02740             *t1a++ = *t2a++;
02741         }
02742         else t2a += 3;
02743     }
02744     while ( t1a < t1e ) {
02745         if ( t1a[2] >= 0 ) {
02746             t3 = t1a+3;
02747             while ( t3 < t1e ) { t3[-3] = *t3; t3[-2] = t3[1]; t3[-1] = t3[2]; t3 += 3; }
02748             t1e -= 3;
02749         }
02750         else t1a += 2;
02751     }
02752     t1[1] = t1a - t1;
02753     return(0);
02754 }
02755
02756 /*
02757 #] ArgDotproductMerge :
02758 #[ TakeArgContent :
02759 */
02772 WORD *TakeArgContent(PHEAD WORD *argin, WORD *argout)
02773 {
02774     GETBIDENTITY
02775     WORD *t, *rnext, *r1, *r2, *r3, *r5, *r6, *r7, *r8, *r9;
02776     WORD pow, *mm, *mnext, *mstop, *argin2 = argin, *argin3 = argin, *argfree;
02777     WORD ncom;
02778     int j, i, act;
02779     r5 = t = argin + ARGHEAD;
02780     r3 = argin + *argin;
02781     rnext = t + *t;
02782     GETSTOP(t,r6);
02783     r1 = argout;
02784     t++;
02785 /*
02786     First pass: arrange everything but the symbols and dotproducts.
02787     They need separate treatment because we have to take out negative
02788     powers.
02789 */
02790     while ( t < r6 ) {
02791 /*
02792         #[ DELTA/VECTOR :
02793 */
02794         if ( *t == DELTA || *t == VECTOR ) {
02795             r7 = t; r8 = t + t[1]; t += 2;
02796             while ( t < r8 ) {
02797                 mm = rnext;
02798                 pow = 1;
02799                 while ( mm < r3 ) {
02800                     mnext = mm + *mm;
02801                     GETSTOP(mm,mstop); mm++;
02802                     while ( mm < mstop ) {
02803                         if ( *mm != *r7 ) mm += mm[1];
02804                         else break;
02805                     }
02806                     if ( *mm == *r7 ) {
02807                         mstop = mm + mm[1]; mm += 2;
02808                         while ( ( *mm != *t || mm[1] != t[1] )
02809                             && mm < mstop ) mm += 2;
02810                         if ( mm >= mstop ) pow = 0;
02811                     }
02812                     else pow = 0;
02813                     if ( pow == 0 ) break;
02814                     mm = mnext;
02815                 }
02816                 if ( pow == 0 ) { t += 2; continue; }
02817 /*
02818         We have a factor
02819 */
02820                 *r1++ = 8 + ARGHEAD;
02821                 for ( j = 1; j < ARGHEAD; j++ ) *r1++ = 0;
02822                 *r1++ = 8; *r1++ = *r7;
02823                 *r1++ = 4; *r1++ = *t; *r1++ = t[1];
02824                 *r1++ = 1; *r1++ = 1; *r1++ = 3;
02825                 argout = r1;
02826 /*
02827         Now we have to remove the delta's/vectors
02828 */
02829                 mm = rnext;

```



```

02830         while ( mm < r3 ) {
02831             mnext = mm + *mm;
02832             GETSTOP(mm,mstop); mm++;
02833             while ( mm < mstop ) {
02834                 if ( *mm != *r7 ) mm += mm[1];
02835                 else break;
02836             }
02837             mstop = mm + mm[1]; mm += 2;
02838             while ( mm < mstop && (
02839                 *mm != *t || mm[1] != t[1] ) ) mm += 2;
02840             *mm = mm[1] = NOINDEX;
02841             mm = mnext;
02842         }
02843         *t = t[1] = NOINDEX;
02844         t += 2;
02845     }
02846 }
02847 /*
02848     #] DELTA/VECTOR :
02849     #[ INDEX :
02850 */
02851 else if ( *t == INDEX ) {
02852     r7 = t; r8 = t + t[1]; t += 2;
02853     while ( t < r8 ) {
02854         mm = rnext;
02855         pow = 1;
02856         while ( mm < r3 ) {
02857             mnext = mm + *mm;
02858             GETSTOP(mm,mstop); mm++;
02859             while ( mm < mstop ) {
02860                 if ( *mm != *r7 ) mm += mm[1];
02861                 else break;
02862             }
02863             if ( *mm == *r7 ) {
02864                 mstop = mm + mm[1]; mm += 2;
02865                 while ( *mm != *t
02866                     && mm < mstop ) mm++;
02867                 if ( mm >= mstop ) pow = 0;
02868             }
02869             else pow = 0;
02870             if ( pow == 0 ) break;
02871             mm = mnext;
02872         }
02873         if ( pow == 0 ) { t++; continue; }
02874     }
02875     /*
02876     We have a factor
02877 */
02877     if ( *t < 0 ) { *r1++ = -VECTOR; }
02878     else          { *r1++ = -INDEX; }
02879     *r1++ = *t;
02880     argout = r1;
02881 }
02882 /*
02883     Now we have to remove the index
02884 */
02884     *t = NOINDEX;
02885     mm = rnext;
02886     while ( mm < r3 ) {
02887         mnext = mm + *mm;
02888         GETSTOP(mm,mstop); mm++;
02889         while ( mm < mstop ) {
02890             if ( *mm != *r7 ) mm += mm[1];
02891             else break;
02892         }
02893         mstop = mm + mm[1]; mm += 2;
02894         while ( mm < mstop &&
02895             *mm != *t ) mm += 1;
02896         *mm = NOINDEX;
02897         mm = mnext;
02898     }
02899     t += 1;
02900 }
02901 }
02902 /*
02903     #] INDEX :
02904     #[ FUNCTION :
02905 */
02906 else if ( *t >= FUNCTION ) {
02907     /*
02908     In the next code we should actually look inside
02909     the DENOMINATOR or EXPONENT for noncommuting objects
02910 */
02911     if ( *t >= FUNCTION &&
02912         functions[*t-FUNCTION].commute == 0 ) ncom = 0;
02913     else ncom = 1;
02914     if ( ncom ) {
02915         mm = r5 + 1;
02916         while ( mm < t && ( *mm == DUMMYFUN

```

```

02917         || *mm == DUMMYTEN ) ) mm += mm[1];
02918         if ( mm < t ) { t += t[1]; continue; }
02919     }
02920     mm = rnext; pow = 1;
02921     while ( mm < r3 ) {
02922         mnext = mm + *mm;
02923         GETSTOP(mm,mstop); mm++;
02924         while ( mm < mstop ) {
02925             if ( *mm == *t && mm[1] == t[1] ) {
02926                 for ( i = 2; i < t[1]; i++ ) {
02927                     if ( mm[i] != t[i] ) break;
02928                 }
02929                 if ( i >= t[1] )
02930                     { mm += mm[1]; goto nexttterm; }
02931             }
02932             if ( ncom && *mm != DUMMYFUN && *mm != DUMMYTEN )
02933                 { pow = 0; break; }
02934             mm += mm[1];
02935         }
02936         if ( mm >= mstop ) pow = 0;
02937         if ( pow == 0 ) break;
02938     nexttterm:    mm = mnext;
02939     }
02940     if ( pow == 0 ) { t += t[1]; continue; }
02941 /*
02942     Copy the function
02943 */
02944     *r1++ = t[1] + 4 + ARGHEAD;
02945     for ( i = 1; i < ARGHEAD; i++ ) *r1++ = 0;
02946     *r1++ = t[1] + 4;
02947     for ( i = 0; i < t[1]; i++ ) *r1++ = t[i];
02948     *r1++ = 1; *r1++ = 1; *r1++ = 3;
02949     argout = r1;
02950 /*
02951     Now we have to take out the functions
02952 */
02953     mm = rnext;
02954     while ( mm < r3 ) {
02955         mnext = mm + *mm;
02956         GETSTOP(mm,mstop); mm++;
02957         while ( mm < mstop ) {
02958             if ( *mm == *t && mm[1] == t[1] ) {
02959                 for ( i = 2; i < t[1]; i++ ) {
02960                     if ( mm[i] != t[i] ) break;
02961                 }
02962                 if ( i >= t[1] ) {
02963                     if ( functions[*t-FUNCTION].spec > 0 )
02964                         *mm = DUMMYTEN;
02965                     else
02966                         *mm = DUMMYFUN;
02967                     mm += mm[1];
02968                     goto nexttterm;
02969                 }
02970             }
02971             mm += mm[1];
02972         }
02973     nexttterm:    mm = mnext;
02974     }
02975     if ( functions[*t-FUNCTION].spec > 0 )
02976         *t = DUMMYTEN;
02977     else
02978         *t = DUMMYFUN;
02979     t += t[1];
02980 }
02981 /*
02982     #] FUNCTION :
02983 */
02984     else {
02985         t += t[1];
02986     }
02987 }
02988 /*
02989     #[ SYMBOL :
02990
02991     Now collect all symbols. We can use the space after r1 as storage
02992 */
02993     t = argin+ARGHEAD;
02994     rnext = t + *t;
02995     r2 = r1;
02996     while ( t < r3 ) {
02997         GETSTOP(t,r6);
02998         t++;
02999         act = 0;
03000         while ( t < r6 ) {
03001             if ( *t == SYMBOL ) {
03002                 act = 1;
03003                 i = t[1];

```

```

03004         NCOPY(r2,t,i)
03005     }
03006     else { t += t[1]; }
03007 }
03008 if ( act == 0 ) {
03009     *r2++ = SYMBOL; *r2++ = 2;
03010 }
03011 t = rnext; rnext = rnext + *rnext;
03012 }
03013 *r2 = 0;
03014 argin2 = argin;
03015 /*
03016     Now we have a list of all symbols as a sequence of SYMBOL subterms.
03017     Any symbol that is absent in a subterm has power zero.
03018     We now need a list of all minimum powers.
03019     This can be done by subsequent merges.
03020 */
03021 r7 = r1;          /* The first object into which we merge. */
03022 r8 = r7 + r7[1]; /* The object that gets merged into r7. */
03023 while ( *r8 ) {
03024     r2 = r8 + r8[1]; /* Next object */
03025     ArgSymbolMerge(r7,r8);
03026     r8 = r2;
03027 }
03028 /*
03029     Now we have to divide by the object in r7 and take it apart as factors.
03030     The division can be simple if there are no negative powers.
03031 */
03032 if ( r7[1] > 2 ) {
03033     r8 = r7+2;
03034     r2 = r7 + r7[1];
03035     act = 0;
03036     pow = 0;
03037     while ( r8 < r2 ) {
03038         if ( r8[1] < 0 ) { act = 1; pow += -r8[1]*(ARGHEAD+8); }
03039         else { pow += 2*r8[1]; }
03040         r8 += 2;
03041     }
03042 /*
03043     The amount of space we need to move r7 is given in pow
03044 */
03045     if ( act == 0 ) { /* this can be done 'in situ' */
03046         t = argin + ARGHEAD;
03047         while ( t < r3 ) {
03048             rnext = t + *t;
03049             GETSTOP(t,r6);
03050             t++;
03051             while ( t < r6 ) {
03052                 if ( *t != SYMBOL ) { t += t[1]; continue; }
03053                 r8 = r7+2; r9 = t + t[1]; t += 2;
03054                 while ( ( t < r9 ) && ( r8 < r2 ) ) {
03055                     if ( *t == *r8 ) {
03056                         t[1] -= r8[1]; t += 2; r8 += 2;
03057                     }
03058                     else { /* *t must be < than *r8 !!! */
03059                         t += 2;
03060                     }
03061                 }
03062                 t = r9;
03063             }
03064             t = rnext;
03065         }
03066 /*
03067         And now the factors that go to argout.
03068         First we have to move r7 out of the way.
03069 */
03070         r8 = r7+pow; i = r7[1];
03071         while ( --i >= 0 ) r8[i] = r7[i];
03072         r2 += pow;
03073         r8 += 2;
03074         while ( r8 < r2 ) {
03075             for ( i = 0; i < r8[1]; i++ ) { *r1++ = -SYMBOL; *r1++ = *r8; }
03076             r8 += 2;
03077         }
03078     }
03079     else { /* this needs a new location */
03080         argin2 = TermMalloc("TakeArgContent2");
03081 /*
03082         We have to multiply the inverse of r7 into argin
03083         The answer should go to argin2.
03084 */
03085         r5 = argin2; *r5++ = 0; *r5++ = 0; FILLARG(r5);
03086         t = argin+ARGHEAD;
03087         while ( t < r3 ) {
03088             rnext = t + *t;
03089             GETSTOP(t,r6);
03090             r9 = r5;

```

```

03091         *r5++ = *t++ + r7[1];
03092         while ( t < r6 ) *r5++ = *t++;
03093         i = r7[1] - 2; r8 = r7+2;
03094         *r5++ = r7[0]; *r5++ = r7[1];
03095         while ( i > 0 ) { *r5++ = *r8++; *r5++ = -*r8++; i -= 2; }
03096         while ( t < rnext ) *r5++ = *t++;
03097         Normalize(BHEAD r9);
03098         r5 = r9 + *r9;
03099     }
03100     *r5 = 0;
03101     *argin2 = r5-argin2;
03102 /*
03103     We may have to sort the terms in argin2.
03104 */
03105     NewSort(BHEAD0);
03106     t = argin2+ARGHEAD;
03107     while ( *t ) {
03108         StoreTerm(BHEAD t);
03109         t += *t;
03110     }
03111     t = argin2+ARGHEAD;
03112     if ( EndSort(BHEAD t,0) < 0 ) goto Irreg;
03113     while ( *t ) t += *t;
03114     *argin2 = t - argin2;
03115     r3 = t;
03116 /*
03117     And now the factors that go to argout.
03118     First we have to move r7 out of the way.
03119 */
03120     r8 = r7+pow; i = r7[1];
03121     while ( --i >= 0 ) r8[i] = r7[i];
03122     r2 += pow;
03123     r8 += 2;
03124     while ( r8 < r2 ) {
03125         if ( r8[1] >= 0 ) {
03126             for ( i = 0; i < r8[1]; i++ ) { *r1++ = -SYMBOL; *r1++ = *r8; }
03127         }
03128         else {
03129             for ( i = 0; i < -r8[1]; i++ ) {
03130                 *r1++ = ARGHEAD+8; *r1++ = 0;
03131                 FILLARG(r1);
03132                 *r1++ = 8; *r1++ = SYMBOL; *r1++ = 4; *r1++ = *r8;
03133                 *r1++ = -1; *r1++ = 1; *r1++ = 1; *r1++ = 3;
03134             }
03135             r8 += 2;
03136         }
03137     }
03138     argout = r1;
03139 }
03140 }
03141 /*
03142     #] SYMBOL :
03143     #[ DOTPRODUCT :
03144
03145     Now collect all dotproducts. We can use the space after r1 as storage
03146 */
03147     t = argin2+ARGHEAD;
03148     rnext = t + *t;
03149     r2 = r1;
03150     while ( t < r3 ) {
03151         GETSTOP(t,r6);
03152         t++;
03153         act = 0;
03154         while ( t < r6 ) {
03155             if ( *t == DOTPRODUCT ) {
03156                 act = 1;
03157                 i = t[1];
03158                 NCOPY(r2,t,i)
03159             }
03160             else { t += t[1]; }
03161         }
03162         if ( act == 0 ) {
03163             *r2++ = DOTPRODUCT; *r2++ = 2;
03164         }
03165         t = rnext; rnext = rnext + *rnext;
03166     }
03167     *r2 = 0;
03168     argin3 = argin2;
03169 /*
03170     Now we have a list of all dotproducts as a sequence of DOTPRODUCT
03171     subterms. Any dotproduct that is absent in a subterm has power zero.
03172     We now need a list of all minimum powers.
03173     This can be done by subsequent merges.
03174 */
03175     r7 = r1; /* The first object into which we merge. */
03176     r8 = r7 + r7[1]; /* The object that gets merged into r7. */
03177     while ( *r8 ) {

```

```

03178         r2 = r8 + r8[1]; /* Next object */
03179         ArgDotproductMerge(r7,r8);
03180         r8 = r2;
03181     }
03182     /*
03183     Now we have to divide by the object in r7 and take it apart as factors.
03184     The division can be simple if there are no negative powers.
03185     */
03186     if ( r7[1] > 2 ) {
03187         r8 = r7+2;
03188         r2 = r7 + r7[1];
03189         act = 0;
03190         pow = 0;
03191         while ( r8 < r2 ) {
03192             if ( r8[2] < 0 ) { pow += -r8[2]*(ARGHEAD+9); }
03193             else { pow += r8[2]*(ARGHEAD+9); }
03194             r8 += 3;
03195         }
03196         /*
03197         The amount of space we need to move r7 is given in pow
03198         For dotproducts we always need a new location
03199         */
03200         {
03201             argin3 = TermMalloc("TakeArgContent3");
03202             /*
03203             We have to multiply the inverse of r7 into argin
03204             The answer should go to argin2.
03205             */
03206             r5 = argin3; *r5++ = 0; *r5++ = 0; FILLARG(r5);
03207             t = argin2+ARGHEAD;
03208             while ( t < r3 ) {
03209                 rnext = t + *t;
03210                 GETSTOP(t,r6);
03211                 r9 = r5;
03212                 *r5++ = *t++ + r7[1];
03213                 while ( t < r6 ) *r5++ = *t++;
03214                 i = r7[1] - 2; r8 = r7+2;
03215                 *r5++ = r7[0]; *r5++ = r7[1];
03216                 while ( i > 0 ) { *r5++ = *r8++; *r5++ = *r8++; *r5++ = -*r8++; i -= 3; }
03217                 while ( t < rnext ) *r5++ = *t++;
03218                 Normalize(BHEAD r9);
03219                 r5 = r9 + *r9;
03220             }
03221             *r5 = 0;
03222             *argin3 = r5-argin3;
03223             /*
03224             We may have to sort the terms in argin3.
03225             */
03226             NewSort(BHEAD0);
03227             t = argin3+ARGHEAD;
03228             while ( *t ) {
03229                 StoreTerm(BHEAD t);
03230                 t += *t;
03231             }
03232             t = argin3+ARGHEAD;
03233             if ( EndSort(BHEAD t,0) < 0 ) goto Irreg;
03234             while ( *t ) t += *t;
03235             *argin3 = t - argin3;
03236             r3 = t;
03237             /*
03238             And now the factors that go to argout.
03239             First we have to move r7 out of the way.
03240             */
03241             r8 = r7+pow; i = r7[1];
03242             while ( --i >= 0 ) r8[i] = r7[i];
03243             r2 += pow;
03244             r8 += 2;
03245             while ( r8 < r2 ) {
03246                 for ( i = ABS(r8[2]); i > 0; i-- ) {
03247                     *r1++ = ARGHEAD+9; *r1++ = 0; FILLARG(r1);
03248                     *r1++ = 9; *r1++ = DOTPRODUCT; *r1++ = 5; *r1++ = *r8;
03249                     *r1++ = r8[1]; *r1++ = r8[2] < 0 ? -1: 1;
03250                     *r1++ = 1; *r1++ = 1; *r1++ = 3;
03251                 }
03252                 r8 += 3;
03253             }
03254             argout = r1;
03255         }
03256     }
03257     /*
03258     #] DOTPRODUCT :
03259
03260     We have now in argin3 the argument stripped of negative powers and
03261     common factors. The only thing left to deal with is to make the
03262     coefficients integer. For that we have to find the LCM of the denominators
03263     and the GCD of the numerators. And to start with, the sign.
03264     We force the sign of the first term to be positive.

```

```

03265 */
03266     t = argin3 + ARGHEAD; pow = 1;
03267     t += *t;
03268     if ( t[-1] < 0 ) {
03269         pow = 0;
03270         t[-1] = -t[-1];
03271         while ( t < r3 ) {
03272             t += *t; t[-1] = -t[-1];
03273         }
03274     }
03275 /*
03276     Now the GCD of the numerators and the LCM of the denominators:
03277 */
03278     argfree = TermMalloc("TakeArgContent1");
03279     if ( AN.cmod != 0 ) {
03280         r1 = MakeMod(BHEAD argin3,r1,argfree);
03281     }
03282     else {
03283         r1 = MakeInteger(BHEAD argin3,r1,argfree);
03284     }
03285     if ( pow == 0 ) {
03286         *r1++ = -SNUMBER;
03287         *r1++ = -1;
03288     }
03289     *r1 = 0;
03290 /*
03291     Cleanup
03292 */
03293     if ( argin3 != argin2 ) TermFree(argin3,"TakeArgContent3");
03294     if ( argin2 != argin ) TermFree(argin2,"TakeArgContent2");
03295     return(argfree);
03296 Irreg:
03297     MesPrint("Irregularity while sorting argument in TakeArgContent");
03298     if ( argin3 != argin2 ) TermFree(argin3,"TakeArgContent3");
03299     if ( argin2 != argin ) TermFree(argin2,"TakeArgContent2");
03300     Terminate(-1);
03301     return(0);
03302 }
03303
03304 /*
03305     #] TakeArgContent :
03306     #[ MakeInteger :
03307 */
03318 WORD *MakeInteger(PHEAD WORD *argin,WORD *argout,WORD *argfree)
03319 {
03320     UWORD *GCDbuffer, *GCDbuffer2, *LCMbuffer, *LCMb, *LCMc;
03321     WORD *r, *r1, *r2, *r3, *r4, *r5, *rnext, i, k, j;
03322     WORD kGCD, kLCM, kGCD2, kkLCM, jLCM, jGCD;
03323     GCDbuffer = NumberMalloc("MakeInteger");
03324     GCDbuffer2 = NumberMalloc("MakeInteger");
03325     LCMbuffer = NumberMalloc("MakeInteger");
03326     LCMb = NumberMalloc("MakeInteger");
03327     LCMc = NumberMalloc("MakeInteger");
03328     r4 = argin + *argin;
03329     r = argin + ARGHEAD;
03330 /*
03331     First take the first term to load up the LCM and the GCD
03332 */
03333     r2 = r + *r;
03334     j = r2[-1];
03335     r3 = r2 - ABS(j);
03336     k = REDLENG(j);
03337     if ( k < 0 ) k = -k;
03338     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03339     for ( kGCD = 0; kGCD < k; kGCD++ ) GCDbuffer[kGCD] = r3[kGCD];
03340     k = REDLENG(j);
03341     if ( k < 0 ) k = -k;
03342     r3 += k;
03343     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03344     for ( kLCM = 0; kLCM < k; kLCM++ ) LCMbuffer[kLCM] = r3[kLCM];
03345     r1 = r2;
03346 /*
03347     Now go through the rest of the terms in this argument.
03348 */
03349     while ( r1 < r4 ) {
03350         r2 = r1 + *r1;
03351         j = r2[-1];
03352         r3 = r2 - ABS(j);
03353         k = REDLENG(j);
03354         if ( k < 0 ) k = -k;
03355         while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03356         if ( ( ( GCDbuffer[0] == 1 ) && ( kGCD == 1 ) ) ) {
03357 /*
03358             GCD is already 1
03359 */
03360         }
03361         else if ( ( ( k != 1 ) || ( r3[0] != 1 ) ) ) {

```

```

03362         if ( GcdLong(BHEAD GCdbuffer,kGCD, (UWORD *)r3,k,GCdbuffer2,&kGCD2) ) {
03363             NumberFree(GCdbuffer,"MakeInteger");
03364             NumberFree(GCdbuffer2,"MakeInteger");
03365             NumberFree(LCMbuffer,"MakeInteger");
03366             NumberFree(LCMb,"MakeInteger"); NumberFree(LCMc,"MakeInteger");
03367             goto MakeIntegerErr;
03368         }
03369         kGCD = kGCD2;
03370         for ( i = 0; i < kGCD; i++ ) GCdbuffer[i] = GCdbuffer2[i];
03371     }
03372     else {
03373         kGCD = 1; GCdbuffer[0] = 1;
03374     }
03375     k = REDLENG(j);
03376     if ( k < 0 ) k = -k;
03377     r3 += k;
03378     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03379     if ( ( ( LCMbuffer[0] == 1 ) && ( kLCM == 1 ) ) ) {
03380         for ( kLCM = 0; kLCM < k; kLCM++ )
03381             LCMbuffer[kLCM] = r3[kLCM];
03382     }
03383     else if ( ( k != 1 ) || ( r3[0] != 1 ) ) {
03384         if ( GcdLong(BHEAD LCMbuffer,kLCM, (UWORD *)r3,k,LCMb,&kLCM) ) {
03385             NumberFree(GCdbuffer,"MakeInteger"); NumberFree(GCdbuffer2,"MakeInteger");
03386             NumberFree(LCMbuffer,"MakeInteger"); NumberFree(LCMb,"MakeInteger");
03387             NumberFree(LCMc,"MakeInteger");
03388             goto MakeIntegerErr;
03389         }
03390         DivLong((UWORD *)r3,k,LCMb,kLCM,LCMb,&kLCM,LCMc,&jLCM);
03391         MullLong(LCMbuffer,kLCM,LCMb,kLCM,LCMc,&jLCM);
03392         for ( kLCM = 0; kLCM < jLCM; kLCM++ )
03393             LCMbuffer[kLCM] = LCMc[kLCM];
03394     }
03395     else {} /* LCM doesn't change */
03396     r1 = r2;
03397 }
03398 /*
03399 Now put the factor together: GCD/LCM
03400 */
03401 r3 = (WORD *) (GCdbuffer);
03402 if ( kGCD == kLCM ) {
03403     for ( jGCD = 0; jGCD < kGCD; jGCD++ )
03404         r3[jGCD+kGCD] = LCMbuffer[jGCD];
03405     k = kGCD;
03406 }
03407 else if ( kGCD > kLCM ) {
03408     for ( jGCD = 0; jGCD < kLCM; jGCD++ )
03409         r3[jGCD+kGCD] = LCMbuffer[jGCD];
03410     for ( jGCD = kLCM; jGCD < kGCD; jGCD++ )
03411         r3[jGCD+kGCD] = 0;
03412     k = kGCD;
03413 }
03414 else {
03415     for ( jGCD = kGCD; jGCD < kLCM; jGCD++ )
03416         r3[jGCD] = 0;
03417     for ( jGCD = 0; jGCD < kLCM; jGCD++ )
03418         r3[jGCD+kLCM] = LCMbuffer[jGCD];
03419     k = kLCM;
03420 }
03421 j = 2*k+1;
03422 /*
03423 Now we have to write this to argout
03424 */
03425 if ( ( j == 3 ) && ( r3[1] == 1 ) && ( (WORD)(r3[0]) > 0 ) ) {
03426     *argout = -SNUMBER;
03427     argout[1] = r3[0];
03428     r1 = argout+2;
03429 }
03430 else {
03431     r1 = argout;
03432     *r1++ = j+1+ARGHEAD; *r1++ = 0; FILLARG(r1);
03433     *r1++ = j+1; r2 = r3;
03434     for ( i = 0; i < k; i++ ) { *r1++ = *r2++; *r1++ = *r2++; }
03435     *r1++ = j;
03436 }
03437 /*
03438 Next we have to take the factor out from the argument.
03439 This cannot be done in location, because the denominator stuff can make
03440 coefficients longer.
03441 */
03442 r2 = argfree + 2; FILLARG(r2)
03443 while ( r < r4 ) {
03444     rnext = r + *r;
03445     j = ABS(rnext[-1]);
03446     r5 = rnext - j;
03447     r3 = r2;
03448     while ( r < r5 ) *r2++ = *r++;

```

```

03448         j = (j-1)/2;      /* reduced length. Remember, k is the other red length */
03449         if ( DivRat(BHEAD (UWORD *)r5,j,GCDbuffer,k,(UWORD *)r2,&i) ) {
03450             goto MakeIntegerErr;
03451         }
03452         i = 2*i+1;
03453         r2 = r2 + i;
03454         if ( rnext[-1] < 0 ) r2[-1] = -i;
03455         else                r2[-1] = i;
03456         *r3 = r2-r3;
03457         r = rnext;
03458     }
03459     *r2 = 0;
03460     argfree[0] = r2-argfree;
03461     argfree[1] = 0;
03462 /*
03463 Cleanup
03464 */
03465     NumberFree(LCMc,"MakeInteger");
03466     NumberFree(LCmb,"MakeInteger");
03467     NumberFree(LCmbuffer,"MakeInteger");
03468     NumberFree(GCDbuffer2,"MakeInteger");
03469     NumberFree(GCDbuffer,"MakeInteger");
03470     return(r1);
03471
03472 MakeIntegerErr:
03473     MesCall("MakeInteger");
03474     Terminate(-1);
03475     return(0);
03476 }
03477
03478 /*
03479 #] MakeInteger :
03480 #[ MakeMod :
03481 */
03489 WORD *MakeMod(PHEAD WORD *argin,WORD *argout,WORD *argfree)
03490 {
03491     WORD *r, *instop, *r1, *m, x, xx, ix, ip;
03492     int i;
03493     r = argin; instop = r + *r; r += ARGHEAD;
03494     x = r[*r-3];
03495     if ( r[*r-1] < 0 ) x += AN.cmod[0];
03496     if ( GetModInverses(x,(WORD)(AN.cmod[0]),&ix,&ip) ) {
03497         Terminate(-1);
03498     }
03499     argout[0] = -SNUMBER;
03500     argout[1] = x;
03501     argout[2] = 0;
03502     r1 = argout+2;
03503 /*
03504 Now we have to multiply all coefficients by ix.
03505 This does not make things longer, but we should keep to the conventions
03506 of MakeInteger.
03507 */
03508     m = argfree + ARGHEAD;
03509     while ( r < instop ) {
03510         xx = r[*r-3]; if ( r[*r-1] < 0 ) xx += AN.cmod[0];
03511         xx = (WORD)((((LONG)xx)*ix) % AN.cmod[0]);
03512         if ( xx != 0 ) {
03513             i = *r; NCOPY(m,r,i);
03514             m[-3] = xx; m[-1] = 3;
03515         }
03516         else { r += *r; }
03517     }
03518     *m = 0;
03519     *argfree = m - argfree;
03520     argfree[1] = 0;
03521     argfree += 2; FILLARG(argfree);
03522     return(r1);
03523 }
03524
03525 /*
03526 #] MakeMod :
03527 #[ SortWeights :
03528 */
03534 void SortWeights(LONG *weights,LONG *extraspace,WORD number)
03535 {
03536     LONG w, *fill, *from1, *from2;
03537     int n1,n2,i;
03538     if ( number >= 4 ) {
03539         n1 = number/2; n2 = number - n1;
03540         SortWeights(weights,extraspace,n1);
03541         SortWeights(weights+n1,extraspace,n2);
03542 /*
03543 We copy the first patch to the extra space. Then we merge
03544 Note that a potential remaining n2 objects are already in place.
03545 */
03546         for ( i = 0; i < n1; i++ ) extraspace[i] = weights[i];

```



```


03547         fill = weights; from1 = extraspace; from2 = weights+n1;
03548         while ( n1 > 0 && n2 > 0 ) {
03549             if ( *from1 <= *from2 ) { *fill++ = *from1++; n1--; }
03550             else { *fill++ = *from2++; n2--; }
03551         }
03552         while ( n1 > 0 ) { *fill++ = *from1++; n1--; }
03553     }
03554     /*
03555     Special cases
03556     */
03557     else if ( number == 3 ) { /* 6 permutations of which one is trivial */
03558         if ( weights[0] > weights[1] ) {
03559             if ( weights[1] > weights[2] ) {
03560                 w = weights[0]; weights[0] = weights[2]; weights[2] = w;
03561             }
03562             else if ( weights[0] > weights[2] ) {
03563                 w = weights[0]; weights[0] = weights[1];
03564                 weights[1] = weights[2]; weights[2] = w;
03565             }
03566             else {
03567                 w = weights[0]; weights[0] = weights[1]; weights[1] = w;
03568             }
03569         }
03570         else if ( weights[0] > weights[2] ) {
03571             w = weights[0]; weights[0] = weights[2];
03572             weights[2] = weights[1]; weights[1] = w;
03573         }
03574         else if ( weights[1] > weights[2] ) {
03575             w = weights[1]; weights[1] = weights[2]; weights[2] = w;
03576         }
03577     }
03578     else if ( number == 2 ) {
03579         if ( weights[0] > weights[1] ) {
03580             w = weights[0]; weights[0] = weights[1]; weights[1] = w;
03581         }
03582     }
03583     return;
03584 }
03585
03586 /*
03587 #] SortWeights :
03588 */

```

4.3 bugtool.c File Reference

#include "form3.h"

Include dependency graph for bugtool.c:

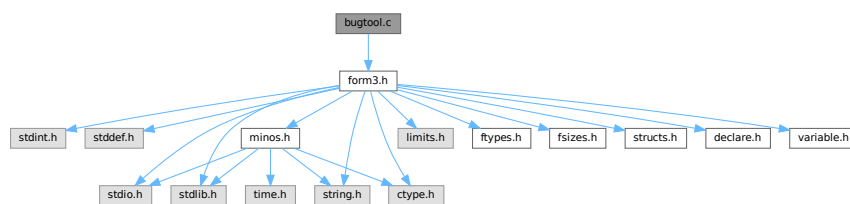

Functions

- void [ExprStatus](#) (EXPRESSIONS e)

4.3.1 Detailed Description

Low level routines for debugging

Definition in file [bugtool.c](#).

4.3.2 Function Documentation

4.3.2.1 ExprStatus()

```
void ExprStatus (
    EXPRESSIONS e )
```

Definition at line 66 of file [bugtool.c](#).

4.4 bugtool.c

[Go to the documentation of this file.](#)

```
00001
00006 /* #[ License : */
00007 /*
00008 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[ License : */
00032
00033 /*
00034 *   #[ Includes :
00035 */
00036
00037 #include "form3.h"
00038
00039 /*
00040 *   #[ Includes :
00041 *   #[ ExprStatus :
00042 */
00043
00044 static UBYTE *statusexpr[] = {
00045     (UBYTE *) "LOCALEXPRESSION"
00046     , (UBYTE *) "SKIPLEXPRESSION"
00047     , (UBYTE *) "DROPLEXPRESSION"
00048     , (UBYTE *) "DROPEDEXPRESSION"
00049     , (UBYTE *) "GLOBALEXPRESSION"
00050     , (UBYTE *) "SKIPGEXPRESSION"
00051     , (UBYTE *) "DROPGEXPRESSION"
00052     , (UBYTE *) "UNKNOWN"
00053     , (UBYTE *) "STOREDEXPRESSION"
00054     , (UBYTE *) "HIDDENLEXPRESSION"
00055     , (UBYTE *) "HIDELEXPRESSION"
00056     , (UBYTE *) "DROPHLEXPRESSION"
00057     , (UBYTE *) "UNHIDELEXPRESSION"
00058     , (UBYTE *) "HIDDENGEXPRESSION"
00059     , (UBYTE *) "HIDEGEXPRESSION"
00060     , (UBYTE *) "DROPHGEXPRESSION"
00061     , (UBYTE *) "UNHIDEGEXPRESSION"
00062     , (UBYTE *) "INTOHIDELEXPRESSION"
00063     , (UBYTE *) "INTOHIDEGEXPRESSION"
00064 };
00065
00066 void ExprStatus(EXPRESSIONS e)
00067 {
00068     MesPrint("Expression %s(%d) has status %s(%d,%d). Buffer: %d, Position: %15p",
```

```

00069      AC.exprnames->namebuffer+e->name, (WORD) (e->Expressions),
00070      statusexpr[e->status], e->status, e->hidelevel,
00071      e->whichbuffer, &(e->onfile));
00072  }
00073
00074  /*
00075   #] ExprStatus :
00076  */

```


4.5 checkpoint.c File Reference

```

#include "form3.h"
#include <errno.h>

```

Include dependency graph for checkpoint.c:

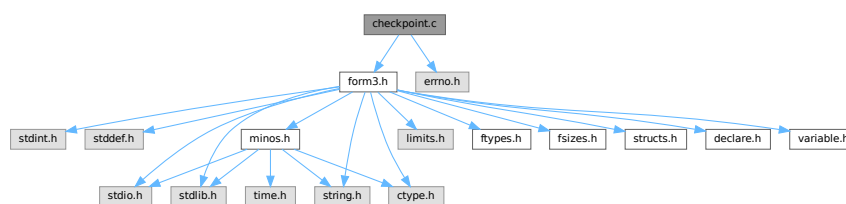

Macros

- #define [CACHED_SNAPSHOT](#)
- #define [CACHE_SIZE](#) 4096
- #define [R_FREE](#)(ARG) if (ARG) M_free(ARG, #ARG);
- #define [R_FREE_NAMETREE](#)(ARG)
- #define [R_FREE_STREAM](#)(ARG)
- #define [R_SET](#)(VAR, TYPE) VAR = *((TYPE*)p); p = (unsigned char*)p + sizeof(TYPE);
- #define [R_COPY_B](#)(VAR, SIZE, CAST)
- #define [S_WRITE_B](#)(BUF, LEN) if (fwrite_cached(BUF, 1, LEN, fd) != (size_t)(LEN)) return(__LINE__);
- #define [S_FLUSH_B](#) if (flush_cache(fd) != 1) return(__LINE__);
- #define [R_COPY_S](#)(VAR, CAST)
- #define [S_WRITE_S](#)(STR)
- #define [R_COPY_LIST](#)(ARG)
- #define [S_WRITE_LIST](#)(LST)
- #define [R_COPY_NAMETREE](#)(ARG)
- #define [S_WRITE_NAMETREE](#)(ARG)
- #define [S_WRITE_DOLLAR](#)(ARG)
- #define [ANNOUNCE](#)(str)

Functions

- int [CheckRecoveryFile](#) (void)
- void [DeleteRecoveryFile](#) (void)
- char * [RecoveryFilename](#) (void)
- void [InitRecovery](#) (void)
- size_t [fwrite_cached](#) (const void *ptr, size_t size, size_t nmemb, FILE *fd)
- size_t [flush_cache](#) (FILE *fd)
- int [DoRecovery](#) (int *moduletype)
- void [DoCheckpoint](#) (int moduletype)

Variables

- unsigned char `cache_buffer` [CACHE_SIZE]
- size_t `cache_fill` = 0

4.5.1 Detailed Description

Contains all functions that deal with the recovery mechanism controlled and activated by the On Checkpoint switch.

The main function are DoCheckpoint, DoRecovery, and DoSnapshot. If the checkpoints are activated DoCheckpoint is called every time a module is finished executing. If the conditions for the creation of a recovery snapshot are met DoCheckpoint calls DoSnapshot. DoRecovery is called once when FORM starts up with the command line argument -R. Most of the other code contains debugging facilities that are only compiled if the macro PRINTDEBUG is defined.

The recovery mechanism is atomic, i.e. only if everything went well, the final recovery file is created (and the older one overwritten) in a single step (copying). If some errors occur, a warning is issued and the program continues without having created a new recovery file. The only situation in which the creation of the recovery data leads to a termination of the running program is if not enough disk or memory space is left.

For ParFORM each slave creates its own recovery file, sends it to the master and then it deletes the recovery file. The master stores all the recovery files and on recovery it feeds these files to the slaves. It is nearly impossible to recover after some MPI fault so ParFORM terminates on any recovery failure.

DoRecovery and DoSnapshot do the loading and saving of the recovery data, respectively. Every change in one functions needs to be accompanied by the appropriate change in the other function. The structure of both functions is quite similar. They handle the relevant global structs one after the other and then care about the copying of the hide and scratch files.

The names of the recovery, scratch and hide files are hard-coded in the variables in fold "filenames and system commands".

If the global structs AM,AP,AC,AR are changed, DoRecovery and DoSnapshot usually also have to be changed. Some structs are read/written as a whole (AP,AC), some are read/written only partly as a selection of their individual elements (AM,AR). If AM or AR have been changed by adding or removing an element that is important for the runtime status, then the reading/writing statements have to be added to or removed from DoRecovery and DoSnapshot. If AP or AC are changed, then for non-pointer variables (in the case of a struct it also means that none of its elements is a pointer) nothing has to be changed in the functions here. If pointers are involved, extra code has to be added (or removed). See the comments of DoRecovery and DoSnapshot.

Definition in file [checkpoint.c](#).

4.5.2 Macro Definition Documentation

4.5.2.1 CACHED_SNAPSHOT

```
#define CACHED_SNAPSHOT
```

Definition at line 1214 of file [checkpoint.c](#).

4.5.2.2 CACHE_SIZE

```
#define CACHE_SIZE 4096
```

Definition at line 1216 of file [checkpoint.c](#).

4.5.2.3 R_FREE

```
#define R_FREE(  
    ARG )    if ( ARG ) M_free(ARG, #ARG);
```

Definition at line 1281 of file [checkpoint.c](#).

4.5.2.4 R_FREE_NAMETREE

```
#define R_FREE_NAMETREE(  
    ARG )
```

Value:

```
R_FREE(ARG->namenode); \  
R_FREE(ARG->namebuffer); \  
R_FREE(ARG);
```

Definition at line 1284 of file [checkpoint.c](#).

4.5.2.5 R_FREE_STREAM

```
#define R_FREE_STREAM(  
    ARG )
```

Value:

```
R_FREE(ARG.buffer); \  
R_FREE(ARG.FoldName); \  
R_FREE(ARG.name);
```

Definition at line 1289 of file [checkpoint.c](#).

4.5.2.6 R_SET

```
#define R_SET(  
    VAR,  
    TYPE )    VAR = *((TYPE*)p); p = (unsigned char*)p + sizeof(TYPE);
```

Definition at line 1296 of file [checkpoint.c](#).

4.5.2.7 R_COPY_B

```
#define R_COPY_B(  
    VAR,  
    SIZE,  
    CAST )
```

Value:

```
VAR = (CAST)Malloc1(SIZE, #VAR); \  
memcpy(VAR, p, SIZE); p = (unsigned char*)p + SIZE;
```

Definition at line 1301 of file [checkpoint.c](#).

4.5.2.8 S_WRITE_B

```
#define S_WRITE_B(
    BUF,
    LEN ) if ( fwrite_cached(BUF, 1, LEN, fd) != (size_t) (LEN) ) return(__LINE__);
```

Definition at line 1305 of file [checkpoint.c](#).

4.5.2.9 S_FLUSH_B

```
#define S_FLUSH_B if ( flush_cache(fd) != 1 ) return(__LINE__);
```

Definition at line 1308 of file [checkpoint.c](#).

4.5.2.10 R_COPY_S

```
#define R_COPY_S(
    VAR,
    CAST )
```

Value:

```
if ( VAR ) { \
    VAR = (CAST)Malloc1(strlen(p)+1,"R_COPY_S"); \
    strcpy((char*)VAR, p); p = (unsigned char*)p + strlen(p) + 1; \
}
```

Definition at line 1313 of file [checkpoint.c](#).

4.5.2.11 S_WRITE_S

```
#define S_WRITE_S(
    STR )
```

Value:

```
if ( STR ) { \
    l = strlen((char*)STR) + 1; \
    if ( fwrite_cached(STR, 1, l, fd) != (size_t)l ) return(__LINE__); \
}
```

Definition at line 1319 of file [checkpoint.c](#).

4.5.2.12 R_COPY_LIST

```
#define R_COPY_LIST(
    ARG )
```

Value:

```
if ( ARG.maxnum ) { \
    R_COPY_B(ARG.lijst, ARG.size*ARG.maxnum, void*) \
}
```

Definition at line 1327 of file [checkpoint.c](#).

4.5.2.13 S_WRITE_LIST

```
#define S_WRITE_LIST(
    LST )
```

Value:

```
if ( LST.maxnum ) { \
    S_WRITE_B((char*)LST.lijst, LST.maxnum*LST.size) \
}
```

Definition at line 1332 of file [checkpoint.c](#).

4.5.2.14 R_COPY_NAMETREE

```
#define R_COPY_NAMETREE(
    ARG )
```

Value:

```
R_COPY_B(ARG, sizeof(NAMETREE), NAMETREE*); \
if ( ARG->namenode ) { \
    R_COPY_B(ARG->namenode, ARG->nodesize*sizeof(NAMENODE), NAMENODE*); \
} \
if ( ARG->namebuffer ) { \
    R_COPY_B(ARG->namebuffer, ARG->namesize, UBYTE*); \
}
```

Definition at line 1339 of file [checkpoint.c](#).

4.5.2.15 S_WRITE_NAMETREE

```
#define S_WRITE_NAMETREE(
    ARG )
```

Value:

```
S_WRITE_B(ARG, sizeof(NAMETREE)); \
if ( ARG->namenode ) { \
    S_WRITE_B(ARG->namenode, ARG->nodesize*sizeof(struct NaMeNode)); \
} \
if ( ARG->namebuffer ) { \
    S_WRITE_B(ARG->namebuffer, ARG->namesize); \
}
```

Definition at line 1348 of file [checkpoint.c](#).

4.5.2.16 S_WRITE_DOLLAR

```
#define S_WRITE_DOLLAR(
    ARG )
```

Value:

```
if ( ARG.size && ARG.where && ARG.where != &(AM.dollarzero) ) { \
    S_WRITE_B(ARG.where, ARG.size*sizeof(WORD)) \
}
```

Definition at line 1359 of file [checkpoint.c](#).

4.5.2.17 ANNOUNCE

```
#define ANNOUNCE(  
    str )
```

Definition at line 1370 of file [checkpoint.c](#).

4.5.3 Function Documentation

4.5.3.1 CheckRecoveryFile()

```
int CheckRecoveryFile (  
    void )
```

Checks whether a snapshot/recovery file exists. Returns 1 if it exists, 0 otherwise.

Definition at line 278 of file [checkpoint.c](#).

References [RecoveryFilename\(\)](#).

Here is the call graph for this function:



4.5.3.2 DeleteRecoveryFile()

```
void DeleteRecoveryFile (  
    void )
```

Deletes the recovery files. It is called by `CleanUp()` in the case of a successful completion.

Definition at line 333 of file [checkpoint.c](#).

4.5.3.3 RecoveryFilename()

```
char * RecoveryFilename (  
    void )
```

Returns pointer to recovery filename.

Definition at line 364 of file [checkpoint.c](#).

Referenced by [CheckRecoveryFile\(\)](#), and [DoRecovery\(\)](#).

4.5.3.4 InitRecovery()

```
void InitRecovery (
    void )
```

Sets up the strings for the filenames of the recovery files. This functions should only be called once to avoid memory leaks and after AM.TempDir has been initialized.

Definition at line 399 of file [checkpoint.c](#).

4.5.3.5 fwrite_cached()

```
size_t fwrite_cached (
    const void * ptr,
    size_t size,
    size_t nmemb,
    FILE * fd )
```

Definition at line 1222 of file [checkpoint.c](#).

4.5.3.6 flush_cache()

```
size_t flush_cache (
    FILE * fd )
```

Definition at line 1247 of file [checkpoint.c](#).

4.5.3.7 DoRecovery()

```
int DoRecovery (
    int * moduletype )
```

Reads from the recovery file and restores all necessary variables and states in FORM, so that the execution can recommence in preprocessor() as if no restart of FORM had occurred.

The recovery file is read into memory as a whole. The pointer p then points into this memory at the next non-processed data. The macros by which variables are restored, like R_SET, automatically increase p appropriately.

If something goes wrong, the function returns with a non-zero value.

Allocated memory that would be lost when overwriting the global structs with data from the file is freed first. A major part of the code deals with the restoration of pointers. The idiom we use is to memorize the original pointer value (org), allocate new memory and copy the data from the file into this memory, calculate the offset between the old pointer value and the new allocated memory position (ofs), and then correct all affected pointers (+=ofs).


We rely on the fact that several variables (especially in AM) are already assigned the correct values by the startup functions. That means, in principle, that a change in the setup files between snapshot creation and recovery will be noticed.

Definition at line 1402 of file [checkpoint.c](#).

References [TaBIEs::argtail](#), [TaBIEs::boomlijst](#), [BrAcKeTiNfO::bracketbuffer](#), [TaBIEs::buffers](#), [TaBIEs::bufferssize](#), [CopyFile\(\)](#), [TaBIEs::flags](#), [ReNuMbEr::func](#), [ReNuMbEr::funnum](#), [VaRrEnUm::hi](#), [BrAcKeTiNfO::indexbuffer](#),

[ReNuMbEr::indi](#), [ReNuMbEr::indnum](#), [VaRrEnUm::lo](#), [TaBIes::MaxTreeSize](#), [TaBIes::mm](#), [TaBIes::numind](#), [TaBIes::pattern](#), [TaBIes::prototype](#), [TaBIes::prototypeSize](#), [RecoveryFilename\(\)](#), [ExPrEsSiOn::renumlists](#), [TaBIes::reserved](#), [TaBIes::spare](#), [TaBIes::sparse](#), [VaRrEnUm::start](#), [ReNuMbEr::symb](#), [ReNuMbEr::symnum](#), [TaBIes::tablepointers](#), [TimeWallClock\(\)](#), [TaBIes::totind](#), [ReNuMbEr::vecnum](#), and [ReNuMbEr::vect](#).

Here is the call graph for this function:

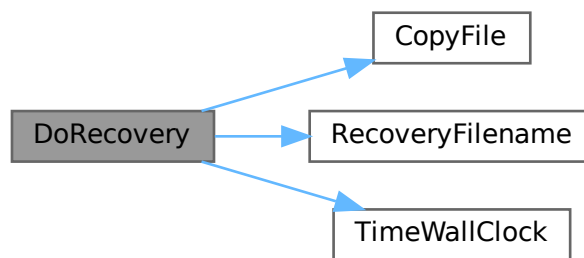

4.5.3.8 DoCheckpoint()


```
void DoCheckpoint (
    int moduletype )
```

Checks whether a snapshot should be done. Calls `DoSnapshot()` to create the snapshot.

Definition at line 3111 of file [checkpoint.c](#).

References [PF_BroadcastNumber\(\)](#), [PF_RecvFile\(\)](#), [PF_SendFile\(\)](#), and [TimeWallClock\(\)](#).

Here is the call graph for this function:

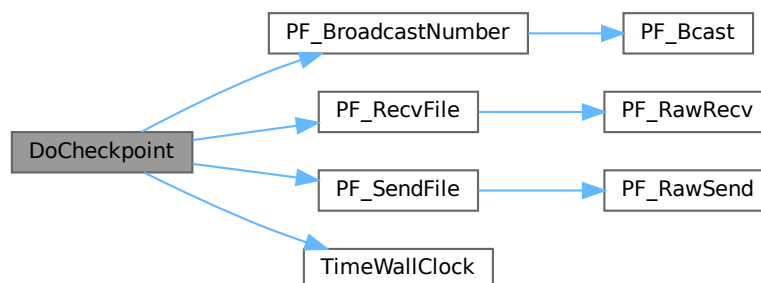

4.5.4 Variable Documentation

4.5.4.1 cache_buffer

```
unsigned char cache_buffer[CACHE_SIZE]
```

Definition at line 1219 of file [checkpoint.c](#).

4.5.4.2 cache_fill

```
size_t cache_fill = 0
```

Definition at line 1220 of file [checkpoint.c](#).

4.6 checkpoint.c

[Go to the documentation of this file.](#)

```
00001 /*
00002      #[ Explanations :
00003 */
00052 /*
00053      #] Explanations :
00054      #[ License :
00055 *
00056 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00057 *   When using this file you are requested to refer to the publication
00058 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00059 *   This is considered a matter of courtesy as the development was paid
00060 *   for by FOM the Dutch physics granting agency and we would like to
00061 *   be able to track its scientific use to convince FOM of its value
00062 *   for the community.
00063 *
00064 *   This file is part of FORM.
00065 *
00066 *   FORM is free software: you can redistribute it and/or modify it under the
00067 *   terms of the GNU General Public License as published by the Free Software
00068 *   Foundation, either version 3 of the License, or (at your option) any later
00069 *   version.
00070 *
00071 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00072 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00073 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00074 *   details.
00075 *
00076 *   You should have received a copy of the GNU General Public License along
00077 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00078 */
00079 /*
00080      #] License :
00081      #[ Includes :
00082 */
00083
00084 #include "form3.h"
00085
00086 #include <errno.h>
00087
00088 /*
00089 #define PRINTDEBUG
00090 */
00091
00092 /*
00093 #define PRINTTIMEMARKS
00094 */
00095
00096 /*
00097      #] Includes :
00098      #[ filenames and system commands :
00099 */
00100
00104 #ifndef WITHMPI
00105 #define BASENAME_FMT "%c%04dFORMrecv"
```

```

00111 static char BaseName[] = BASENAME_FMT;
00112 #else
00113 static char *BaseName = "FORMrecv";
00114 #endif
00118 static char *recoveryfile = 0;
00124 static char *intermedfile = 0;
00128 static char *sortfile = 0;
00132 static char *hidefile = 0;
00136 static char *storefile = 0;
00137
00142 static int done_snapshot = 0;
00143
00144 #ifdef WITHMPI
00149 static int PF_fmt_pos;
00150
00155 static const char *PF_recoveryfile(char prefix, int id, int intermed)
00156 {
00157     /*
00158      * Assume that InitRecovery() has been already called, namely
00159      * recoveryfile, intermedfile and PF_fmt_pos are already initialized.
00160      */
00161     static char *tmp_recovery = NULL;
00162     static char *tmp_intermed = NULL;
00163     char *tmp, c;
00164     if ( tmp_recovery == NULL ) {
00165         if ( PF.numtasks > 9999 ) { /* see BASENAME_FMT */
00166             MesPrint("Checkpoint: too many number of processors.");
00167             Terminate(-1);
00168         }
00169         tmp_recovery = (char *)Malloc1(strlen(recoveryfile) + strlen(intermedfile) + 2,
"PF_recoveryfile");
00170         tmp_intermed = tmp_recovery + strlen(recoveryfile) + 1;
00171         strcpy(tmp_recovery, recoveryfile);
00172         strcpy(tmp_intermed, intermedfile);
00173     }
00174     tmp = intermed ? tmp_intermed : tmp_recovery;
00175     c = tmp[PF_fmt_pos + 13]; /* The magic number 13 comes from BASENAME_FMT. */
00176     sprintf(tmp + PF_fmt_pos, BASENAME_FMT, prefix, id);
00177     tmp[PF_fmt_pos + 13] = c;
00178     return tmp;
00179 }
00180 #endif
00181
00182 /*
00183  #] filenames and system commands :
00184  #[ CheckRecoveryFile :
00185  */
00186
00191 #ifdef WITHMPI
00192
00198 static int PF_CheckRecoveryFile()
00199 {
00200     int i,ret=0;
00201     FILE *fd;
00202     /* Check if the recovery file for the master exists. */
00203     if ( PF.me == MASTER ) {
00204         if ( (fd = fopen(recoveryfile, "r")) ) {
00205             fclose(fd);
00206             PF_BroadcastNumber(1);
00207         }
00208         else {
00209             PF_BroadcastNumber(0);
00210             return 0;
00211         }
00212     }
00213     else {
00214         if ( !PF_BroadcastNumber(0) )
00215             return 0;
00216     }
00217     /* Now the main part. */
00218     if (PF.me == MASTER){
00219         /*We have to have recovery files for the master and all the slaves:*/
00220         for(i=1; i<PF.numtasks;i++){
00221             const char *tmpnam = PF_recoveryfile('m', i, 0);
00222             if ( (fd = fopen(tmpnam, "r")) )
00223                 fclose(fd);
00224             else
00225                 break;
00226         }/*for(i=0; i<PF.numtasks;i+)*/*
00227         if(i!=PF.numtasks){/*some files are absent*/
00228             int j;
00229             /*Send all slaves failure*/
00230             for(j=1; j<PF.numtasks;j++){
00231                 ret=PF_SendFile(j, NULL);
00232                 if(ret<0)
00233                     return(-1);
00234             }

```

```

00235         if(i==0)
00236             return(0);/*Ok, no recovery files at all.*/
00237         /*The master recovery file exists but some slave files are absent*/
00238         MesPrint("The file %s exists but some of the slave recovery files are absent.",
00239                 RecoveryFilename());
00240         return(-1);
00241     }/*if(i!=PF.numtasks)*/
00242     /*All the files are here.*/
00243     /*Send all slaves success and files:*/
00244     for(i=1; i<PF.numtasks;i++){
00245         const char *tmpnam = PF_recoveryfile('m', i, 0);
00246         fd = fopen(tmpnam, "r");
00247         ret=PF_SendFile(i, fd);/*if fd==NULL, PF_SendFile seds to a slave the failure tag*/
00248         if(fd == NULL)
00249             return(-1);
00250         else
00251             fclose(fd);
00252         if(ret<0)
00253             return(-1);
00254     }/*for(i=0; i<PF.numtasks;i++)*/
00255     return(1);
00256 }/*if (PF.me == MASTER)*/
00257 /*Slave:*/
00258 /*Get the answer from the master:*/
00259 fd=fopen(recoveryfile,"w");
00260 if(fd == NULL) {
00261     MesPrint("Failed to open %s in write mode in process %w", recoveryfile);
00262     return(-1);
00263 }
00264 ret=PF_RecvFile(MASTER,fd);
00265 if(ret<0)
00266     return(-1);
00267 fclose(fd);
00268 if(ret==0){
00269     /*Nothing is found by the master*/
00270     remove(recoveryfile);
00271     return(0);
00272 }
00273 /*Recovery file is successfully transferred*/
00274 return(1);
00275 }
00276 #endif
00277
00278 int CheckRecoveryFile(void)
00279 {
00280     int ret = 0;
00281 #ifdef WITHMPI
00282     ret = PF_CheckRecoveryFile();
00283 #else
00284     FILE *fd;
00285     if ( ( fd = fopen(recoveryfile, "r") ) ) {
00286         fclose(fd);
00287         ret = 1;
00288     }
00289 #endif
00290     if ( ret < 0 ){/*In ParFORM CheckRecoveryFile() may return a fatal error.*/
00291         MesPrint("Fail checking recovery file");
00292         Terminate(-1);
00293     }
00294     else if ( ret > 0 ) {
00295         if ( AC.CheckpointFlag != -1 ) {
00296             /* recovery file exists but recovery option is not given */
00297 #ifdef WITHMPI
00298             if ( PF.me == MASTER ) {
00299 #endif
00300                 MesPrint("The recovery file %s exists, but the recovery option -R has not been given!",
00301                         RecoveryFilename());
00302                 MesPrint("FORM will be terminated to avoid unintentional loss of data.");
00303                 MesPrint("Delete the recovery file manually, if you want to start FORM without
00304 recovery.");
00305 #ifdef WITHMPI
00306             }
00307             if(PF.me != MASTER)
00308                 remove(RecoveryFilename());
00309 #endif
00310             Terminate(-1);
00311         }
00312         else {
00313             if ( AC.CheckpointFlag == -1 ) {
00314                 /* recovery option given but recovery file does not exist */
00315 #ifdef WITHMPI
00316                 if ( PF.me == MASTER )
00317 #endif
00318                 MesPrint("Option -R for recovery has been given, but the recovery file %s does not
00319 exist!", RecoveryFilename());
00320                 Terminate(-1);

```

```

00319     }
00320 }
00321 return(ret);
00322 }
00323
00324 /*
00325  #] CheckRecoveryFile :
00326  #[ DeleteRecoveryFile :
00327 */
00328
00333 void DeleteRecoveryFile(void)
00334 {
00335     if ( done_snapshot ) {
00336         remove(recoveryfile);
00337 #ifdef WITHMPI
00338         if( PF.me == MASTER){
00339             int i;
00340             for(i=1; i<PF.numtasks;i++){
00341                 const char *tmpnam = PF_recoveryfile('m', i, 0);
00342                 remove(tmpnam);
00343             }/*for(i=1; i<PF.numtasks;i++)*/
00344             remove(storefile);
00345             remove(sortfile);
00346             remove(hidefile);
00347         }/*if( PF.me == MASTER)*/
00348 #else
00349         remove(storefile);
00350         remove(sortfile);
00351         remove(hidefile);
00352 #endif
00353     }
00354 }
00355
00356 /*
00357  #] DeleteRecoveryFile :
00358  #[ RecoveryFilename :
00359 */
00360
00364 char *RecoveryFilename(void)
00365 {
00366     return(recoveryfile);
00367 }
00368
00369 /*
00370  #] RecoveryFilename :
00371  #[ InitRecovery :
00372 */
00373
00377 static char *InitName(char *str, char *ext)
00378 {
00379     char *s, *d = str;
00380     if ( AM.TempDir ) {
00381         s = (char*)AM.TempDir;
00382         while ( *s ) { *d++ = *s++; }
00383         *d++ = SEPARATOR;
00384     }
00385     s = BaseName;
00386     while ( *s ) { *d++ = *s++; }
00387     *d++ = '.';
00388     s = ext;
00389     while ( *s ) { *d++ = *s++; }
00390     *d++ = 0;
00391     return d;
00392 }
00393
00399 void InitRecovery(void)
00400 {
00401     int lenpath = AM.TempDir ? strlen((char*)AM.TempDir)+1 : 0;
00402 #ifdef WITHMPI
00403     sprintf(BaseName,BASENAME_FMT,(PF.me == MASTER)?'m':'s',PF.me);
00404     /*Now BaseName has a form ?XXXXFORMrcv where ? == 'm' for master and 's' for slave,
00405       XXXX is a zero - padded PF.me*/
00406     PF_fmt_pos = lenpath;
00407 #endif
00408     recoveryfile = (char*)Malloc1(5*(lenpath+strlen(BaseName)+4+1),"InitRecovery");
00409     intermedfile = InitName(recoveryfile, "tmp");
00410     sortfile      = InitName(intermedfile, "XXX");
00411     hidefile      = InitName(sortfile, "out");
00412     storefile     = InitName(hidefile, "hid");
00413     InitName(storefile, "str");
00414 }
00415
00416 /*
00417  #] InitRecovery :
00418  #[ Debugging :
00419 */
00420

```

```

00421 #ifdef PRINTDEBUG
00422
00423 void print_BYTE(void *p)
00424 {
00425     UBYTE h = (UBYTE) (*(UBYTE*)p) >> 4;
00426     UBYTE l = (UBYTE) (*(UBYTE*)p) & 0x0F;
00427     if ( h > 9 ) h += 55; else h += 48;
00428     if ( l > 9 ) l += 55; else l += 48;
00429     printf("%c%c ", h, l);
00430 }
00431
00432 static void print_STR(UBYTE *p)
00433 {
00434     if ( p ) {
00435         MesPrint("%s", (char*)p);
00436     }
00437     else {
00438         MesPrint("NULL");
00439     }
00440 }
00441
00442 static void print_WORDB(WORD *buf, WORD *top)
00443 {
00444     LONG size = top-buf;
00445     int i;
00446     while ( size > 0 ) {
00447         if ( size > MAXPOSITIVE ) i = MAXPOSITIVE;
00448         else i = size;
00449         size -= i;
00450         MesPrint("%a",i,buf);
00451         buf += i;
00452     }
00453 }
00454
00455 static void print_VOIDP(void *p, size_t size)
00456 {
00457     int i;
00458     if ( p ) {
00459         while ( size > 0 ) {
00460             if ( size > MAXPOSITIVE ) i = MAXPOSITIVE;
00461             else i = size;
00462             size -= i;
00463             MesPrint("%b",i,(UBYTE *)p);
00464             p = ((UBYTE *)p)+i;
00465         }
00466     }
00467     else {
00468         MesPrint("NULL");
00469     }
00470 }
00471
00472 static void print_CHARS(UBYTE *p, size_t size)
00473 {
00474     int i;
00475     while ( size > 0 ) {
00476         if ( size > MAXPOSITIVE ) i = MAXPOSITIVE;
00477         else i = size;
00478         size -= i;
00479         MesPrint("%C",i,(char *)p);
00480         p += i;
00481     }
00482 }
00483
00484 static void print_WORDV(WORD *p, size_t size)
00485 {
00486     int i;
00487     if ( p ) {
00488         while ( size > 0 ) {
00489             if ( size > MAXPOSITIVE ) i = MAXPOSITIVE;
00490             else i = size;
00491             size -= i;
00492             MesPrint("%a",i,p);
00493             p += i;
00494         }
00495     }
00496     else {
00497         MesPrint("NULL");
00498     }
00499 }
00500
00501 static void print_INTV(int *p, size_t size)
00502 {
00503     int iarray[8];
00504     WORD i = 0;
00505     if ( p ) {
00506         while ( size > 0 ) {
00507             if ( i >= 8 ) {

```

```

00508         MesPrint("%I",i,iarray);
00509         i = 0;
00510     }
00511     iarray[i++] = *p++;
00512     size--;
00513 }
00514 if ( i > 0 ) MesPrint("%I",i,iarray);
00515 }
00516 else {
00517     MesPrint("NULL");
00518 }
00519 }
00520
00521 static void print_LONGV(LONG *p, size_t size)
00522 {
00523     LONG larray[8];
00524     WORD i = 0;
00525     if ( p ) {
00526         while ( size > 0 ) {
00527             if ( i >= 8 ) {
00528                 MesPrint("%I",i,larray);
00529                 i = 0;
00530             }
00531             larray[i++] = *p++;
00532             size--;
00533         }
00534         if ( i > 0 ) MesPrint("%I",i,larray);
00535     }
00536     else {
00537         MesPrint("NULL");
00538     }
00539 }
00540
00541 static void print_PRELOAD(PRELOAD *l)
00542 {
00543     if ( l->size ) {
00544         print_CHARS(l->buffer, l->size);
00545     }
00546     MesPrint("%ld", l->size);
00547 }
00548
00549 static void print_PREVAR(PREVAR *l)
00550 {
00551     MesPrint("%s", l->name);
00552     print_STR(l->value);
00553     if ( l->nargs ) print_STR(l->argnames);
00554     MesPrint("%d", l->nargs);
00555     MesPrint("%d", l->wildarg);
00556 }
00557
00558 static void print_DOLLARS(DOLLARS l)
00559 {
00560     print_VOIDP(l->where, l->size);
00561     MesPrint("%ld", l->size);
00562     MesPrint("%ld", l->name);
00563     MesPrint("%s", AC.dollarnames->namebuffer+l->name);
00564     MesPrint("%d", l->type);
00565     MesPrint("%d", l->node);
00566     MesPrint("%d", l->index);
00567     MesPrint("%d", l->zero);
00568     MesPrint("%d", l->numdummies);
00569     MesPrint("%d", l->nfactors);
00570 }
00571
00572 static void print_LIST(LIST *l)
00573 {
00574     print_VOIDP(l->lijst, l->size);
00575     MesPrint("%s", l->message);
00576     MesPrint("%d", l->num);
00577     MesPrint("%d", l->maxnum);
00578     MesPrint("%d", l->size);
00579     MesPrint("%d", l->numglobal);
00580     MesPrint("%d", l->numtemp);
00581     MesPrint("%d", l->numclear);
00582 }
00583
00584 static void print_DOLOOP(DOLOOP *l)
00585 {
00586     print_PRELOAD(&(l->p));
00587     print_STR(l->name);
00588     if ( l->type != NUMERICALLOOP ) {
00589         print_STR(l->vars);
00590     }
00591     print_STR(l->contents);
00592     if ( l->type != LISTEDLOOP && l->type != NUMERICALLOOP ) {
00593         print_STR(l->dollarname);
00594     }

```



```

00595     MesPrint("%l", l->startlinenumber);
00596     MesPrint("%l", l->firstnum);
00597     MesPrint("%l", l->lastnum);
00598     MesPrint("%l", l->incnum);
00599     MesPrint("%d", l->type);
00600     MesPrint("%d", l->NoShowInput);
00601     MesPrint("%d", l->errorsinloop);
00602     MesPrint("%d", l->firstloopcall);
00603 }
00604
00605 static void print_PROCEDURE(PROCEDURE *l)
00606 {
00607     if ( l->loadmode != 1 ) {
00608         print_PRELOAD(&(l->p));
00609     }
00610     print_STR(l->name);
00611     MesPrint("%d", l->loadmode);
00612 }
00613
00614 static void print_NAMETREE(NAMETREE *t)
00615 {
00616     int i;
00617     for ( i=0; i<t->nodefill; ++i ) {
00618         MesPrint("%l %d %d %d %d %d %d\n", t->namenode[i].name,
00619             t->namenode[i].parent, t->namenode[i].left, t->namenode[i].right,
00620             t->namenode[i].balance, t->namenode[i].type, t->namenode[i].number );
00621     }
00622     print_CHARS(t->namebuffer, t->namefill);
00623     MesPrint("%l", t->namesize);
00624     MesPrint("%l", t->namefill);
00625     MesPrint("%l", t->nodesize);
00626     MesPrint("%l", t->nodefill);
00627     MesPrint("%l", t->oldnamefill);
00628     MesPrint("%l", t->oldnodefill);
00629     MesPrint("%l", t->globalnamefill);
00630     MesPrint("%l", t->globalnodefill);
00631     MesPrint("%l", t->clearnamefill);
00632     MesPrint("%l", t->clearnodefill);
00633     MesPrint("%d", t->headnode);
00634 }
00635
00636 void print_CBUF(CBUF *c)
00637 {
00638     int i;
00639     print_WORDV(c->Buffer, c->BufferSize);
00640     /*
00641     MesPrint("%x", c->Buffer);
00642     MesPrint("%x", c->lhs);
00643     MesPrint("%x", c->rhs);
00644     */
00645     for ( i=0; i<c->numlhs; ++i ) {
00646         if ( c->lhs[i] ) MesPrint("%d", *(c->lhs[i]));
00647     }
00648     for ( i=0; i<c->numrhs; ++i ) {
00649         if ( c->rhs[i] ) MesPrint("%d", *(c->rhs[i]));
00650     }
00651     MesPrint("%l", *c->CanCommu);
00652     MesPrint("%l", *c->NumTerms);
00653     MesPrint("%d", *c->numdum);
00654     for ( i=0; i<c->MaxTreeSize; ++i ) {
00655         MesPrint("%d %d %d %d %d", c->boomlijst[i].parent, c->boomlijst[i].left,
c->boomlijst[i].right,
00656             c->boomlijst[i].value, c->boomlijst[i].blnce);
00657     }
00658 }
00659
00660 static void print_STREAM(STREAM *t)
00661 {
00662     print_CHARS(t->buffer, t->inbuffer);
00663     MesPrint("%l", (LONG)(t->pointer-t->buffer));
00664     print_STR(t->FoldName);
00665     print_STR(t->name);
00666     if ( t->type == PREVARSTREAM || t->type == DOLLARSTREAM ) {
00667         print_STR(t->pname);
00668     }
00669     MesPrint("%l", (LONG)t->fileposition);
00670     MesPrint("%l", (LONG)t->linenumber);
00671     MesPrint("%l", (LONG)t->prevline);
00672     MesPrint("%l", t->buffersize);
00673     MesPrint("%l", t->bufferposition);
00674     MesPrint("%l", t->inbuffer);
00675     MesPrint("%d", t->previous);
00676     MesPrint("%d", t->handle);
00677     switch ( t->type ) {
00678         case FILESTREAM: MesPrint("%d == FILESTREAM", t->type); break;
00679         case PREVARSTREAM: MesPrint("%d == PREVARSTREAM", t->type); break;
00680         case PREREADSTREAM: MesPrint("%d == PREREADSTREAM", t->type); break;

```

```

00681         case PIPESTREAM: MesPrint("%d == PIPESTREAM", t->type); break;
00682         case PRECALCSTREAM: MesPrint("%d == PRECALCSTREAM", t->type); break;
00683         case DOLLARSTREAM: MesPrint("%d == DOLLARSTREAM", t->type); break;
00684         case PREREADSTREAM2: MesPrint("%d == PREREADSTREAM2", t->type); break;
00685         case EXTERNALCHANNELSTREAM: MesPrint("%d == EXTERNALCHANNELSTREAM", t->type); break;
00686         case PREREADSTREAM3: MesPrint("%d == PREREADSTREAM3", t->type); break;
00687         default: MesPrint("%d == UNKNOWN", t->type);
00688     }
00689 }
00690
00691 static void print_M()
00692 {
00693     MesPrint("%%% M_const");
00694     MesPrint("%d", *AM.gcmmod);
00695     MesPrint("%d", *AM.gpowmod);
00696     print_STR(AM.TempDir);
00697     print_STR(AM.TempSortDir);
00698     print_STR(AM.IncDir);
00699     print_STR(AM.InputFileName);
00700     print_STR(AM.LogFileName);
00701     print_STR(AM.OutBuffer);
00702     print_STR(AM.Path);
00703     print_STR(AM.SetupDir);
00704     print_STR(AM.SetupFile);
00705     MesPrint("--MARK 1");
00706     MesPrint("%l", (LONG)BASEPOSITION(AM.zeropos));
00707 #ifdef WITHPTHREADS
00708     MesPrint("%l", AM.ThreadScratSize);
00709     MesPrint("%l", AM.ThreadScratOutSize);
00710 #endif
00711     MesPrint("%l", AM.MaxTer);
00712     MesPrint("%l", AM.CompressSize);
00713     MesPrint("%l", AM.ScratSize);
00714     MesPrint("%l", AM.SizeStoreCache);
00715     MesPrint("%l", AM.MaxStreamSize);
00716     MesPrint("%l", AM.SIOsize);
00717     MesPrint("%l", AM.SLargeSize);
00718     MesPrint("%l", AM.SSmallEsize);
00719     MesPrint("%l", AM.SSmallSize);
00720     MesPrint("--MARK 2");
00721     MesPrint("%l", AM.STermsInSmall);
00722     MesPrint("%l", AM.MaxBracketBufferSize);
00723     MesPrint("%l", AM.hProcessBucketSize);
00724     MesPrint("%l", AM.gProcessBucketSize);
00725     MesPrint("%l", AM.shmWinSize);
00726     MesPrint("%l", AM.OldChildTime);
00727     MesPrint("%l", AM.OldSecTime);
00728     MesPrint("%l", AM.OldMilliTime);
00729     MesPrint("%l", AM.WorkSize);
00730     MesPrint("%l", AM.gThreadBucketSize);
00731     MesPrint("--MARK 3");
00732     MesPrint("%l", AM.ggThreadBucketSize);
00733     MesPrint("%d", AM.FileOnlyFlag);
00734     MesPrint("%d", AM.Interact);
00735     MesPrint("%d", AM.MaxParLevel);
00736     MesPrint("%d", AM.OutBufSize);
00737     MesPrint("%d", AM.SMaxFpatches);
00738     MesPrint("%d", AM.SMaxPatches);
00739     MesPrint("%d", AM.StdOut);
00740     MesPrint("%d", AM.ginsidefirst);
00741     MesPrint("%d", AM.gDefDim);
00742     MesPrint("%d", AM.gDefDim4);
00743     MesPrint("--MARK 4");
00744     MesPrint("%d", AM.NumFixedSets);
00745     MesPrint("%d", AM.NumFixedFunctions);
00746     MesPrint("%d", AM.rbufnum);
00747     MesPrint("%d", AM.dbufnum);
00748     MesPrint("%d", AM.SkipClears);
00749     MesPrint("%d", AM.gfunpowers);
00750     MesPrint("%d", AM.gStatsFlag);
00751     MesPrint("%d", AM.gNamesFlag);
00752     MesPrint("%d", AM.gCodesFlag);
00753     MesPrint("%d", AM.gTokensWriteFlag);
00754     MesPrint("%d", AM.gSortType);
00755     MesPrint("%d", AM.gproperorderflag);
00756     MesPrint("--MARK 5");
00757     MesPrint("%d", AM.hparallelflag);
00758     MesPrint("%d", AM.gparallelflag);
00759     MesPrint("%d", AM.totalnumberofthreads);
00760     MesPrint("%d", AM.gSizeCommuteInSet);
00761     MesPrint("%d", AM.gThreadStats);
00762     MesPrint("%d", AM.ggThreadStats);
00763     MesPrint("%d", AM.gFinalStats);
00764     MesPrint("%d", AM.ggFinalStats);
00765     MesPrint("%d", AM.gThreadsFlag);
00766     MesPrint("%d", AM.ggThreadsFlag);
00767     MesPrint("%d", AM.gThreadBalancing);

```

```

00768     MesPrint("%d", AM.ggThreadBalancing);
00769     MesPrint("%d", AM.gThreadSortFileSynch);
00770     MesPrint("%d", AM.ggThreadSortFileSynch);
00771     MesPrint("%d", AM.gProcessStats);
00772     MesPrint("%d", AM.ggProcessStats);
00773     MesPrint("%d", AM.gOldParallelStats);
00774     MesPrint("%d", AM.ggOldParallelStats);
00775     MesPrint("%d", AM.gWTimeStatsFlag);
00776     MesPrint("%d", AM.ggWTimeStatsFlag);
00777     MesPrint("%d", AM.maxFlevels);
00778     MesPrint("--MARK 6");
00779     MesPrint("%d", AM.resetTimeOnClear);
00780     MesPrint("%d", AM.gcNumDollars);
00781     MesPrint("%d", AM.MultiRun);
00782     MesPrint("%d", AM.gNoSpacesInNumbers);
00783     MesPrint("%d", AM.ggNoSpacesInNumbers);
00784     MesPrint("%d", AM.MaxTal);
00785     MesPrint("%d", AM.IndDum);
00786     MesPrint("%d", AM.DumInd);
00787     MesPrint("%d", AM.WilInd);
00788     MesPrint("%d", AM.gncmod);
00789     MesPrint("%d", AM.gnpowmod);
00790     MesPrint("%d", AM.gmodmode);
00791     MesPrint("--MARK 7");
00792     MesPrint("%d", AM.gUnitTrace);
00793     MesPrint("%d", AM.gOutputMode);
00794     MesPrint("%d", AM.gCnumpows);
00795     MesPrint("%d", AM.gOutputSpaces);
00796     MesPrint("%d", AM.gOutNumberType);
00797     MesPrint("%d %d %d %d", AM.gUniTrace[0], AM.gUniTrace[1], AM.gUniTrace[2], AM.gUniTrace[3]);
00798     MesPrint("%d", AM.MaxWildcards);
00799     MesPrint("%d", AM.mTraceDum);
00800     MesPrint("%d", AM.OffsetIndex);
00801     MesPrint("%d", AM.OffsetVector);
00802     MesPrint("%d", AM.RepMax);
00803     MesPrint("%d", AM.LogType);
00804     MesPrint("%d", AM.ggStatsFlag);
00805     MesPrint("%d", AM.gLineLength);
00806     MesPrint("%d", AM.qError);
00807     MesPrint("--MARK 8");
00808     MesPrint("%d", AM.FortranCont);
00809     MesPrint("%d", AM.HoldFlag);
00810     MesPrint("%d %d %d %d %d", AM.Ordering[0], AM.Ordering[1], AM.Ordering[2], AM.Ordering[3],
AM.Ordering[4]);
00811     MesPrint("%d %d %d %d %d", AM.Ordering[5], AM.Ordering[6], AM.Ordering[7], AM.Ordering[8],
AM.Ordering[9]);
00812     MesPrint("%d %d %d %d %d", AM.Ordering[10], AM.Ordering[11], AM.Ordering[12], AM.Ordering[13],
AM.Ordering[14]);
00813     MesPrint("%d", AM.silent);
00814     MesPrint("%d", AM.tracebackflag);
00815     MesPrint("%d", AM.expnum);
00816     MesPrint("%d", AM.denomnum);
00817     MesPrint("%d", AM.facnum);
00818     MesPrint("%d", AM.invfacnum);
00819     MesPrint("%d", AM.sumnum);
00820     MesPrint("%d", AM.sumpnum);
00821     MesPrint("--MARK 9");
00822     MesPrint("%d", AM.OldOrderFlag);
00823     MesPrint("%d", AM.termfunnum);
00824     MesPrint("%d", AM.matchfunnum);
00825     MesPrint("%d", AM.countfunnum);
00826     MesPrint("%d", AM.gPolyFun);
00827     MesPrint("%d", AM.gPolyFunInv);
00828     MesPrint("%d", AM.gPolyFunType);
00829     MesPrint("%d", AM.gPolyFunExp);
00830     MesPrint("%d", AM.gPolyFunVar);
00831     MesPrint("%d", AM.gPolyFunPow);
00832     MesPrint("--MARK 10");
00833     MesPrint("%d", AM.dollarzero);
00834     MesPrint("%d", AM.atstartup);
00835     MesPrint("%d", AM.exitflag);
00836     MesPrint("%d", AM.NumStoreCaches);
00837     MesPrint("%d", AM.gIndentSpace);
00838     MesPrint("%d", AM.ggIndentSpace);
00839     MesPrint("%d", AM.gShortStatsMax);
00840     MesPrint("%d", AM.ggShortStatsMax);
00841     MesPrint("--MARK 11");
00842     MesPrint("%d", AM.FromStdin);
00843     MesPrint("%d", AM.IgnoreDeprecation);
00844     MesPrint("%%% END M_const");
00845     /* fflush(0); */
00846 }
00847
00848 static void print_P()
00849 {
00850     int i;
00851     MesPrint("%%% P_const");

```

```

00852     print_LIST(&AP.DollarList);
00853     for ( i=0; i<AP.DollarList.num; ++i ) {
00854         print_DOLLARS(&(Dollars[i]));
00855     }
00856     MesPrint("--MARK 1");
00857     print_LIST(&AP.PreVarList);
00858     for ( i=0; i<AP.PreVarList.num; ++i ) {
00859         print_PREVAR(&(PreVar[i]));
00860     }
00861     MesPrint("--MARK 2");
00862     print_LIST(&AP.LoopList);
00863     for ( i=0; i<AP.LoopList.num; ++i ) {
00864         print_DOLOOP(&(DoLoops[i]));
00865     }
00866     MesPrint("--MARK 3");
00867     print_LIST(&AP.ProcList);
00868     for ( i=0; i<AP.ProcList.num; ++i ) {
00869         print_PROCEDURE(&(Procedures[i]));
00870     }
00871     MesPrint("--MARK 4");
00872     for ( i=0; i<=AP.PreSwitchLevel; ++i ) {
00873         print_STR(AP.PreSwitchStrings[i]);
00874     }
00875     MesPrint("%l", AP.preStop-AP.preStart);
00876     if ( AP.preFill ) MesPrint("%l", AP.preFill-AP.preStart);
00877     print_CHARS(AP.preStart, AP.pSize);
00878     MesPrint("%s", AP.procedureExtension);
00879     MesPrint("%s", AP.cprocedureExtension);
00880     print_INTV(AP.PreIfStack, AP.MaxPreIfLevel);
00881     print_INTV(AP.PreSwitchModes, AP.NumPreSwitchStrings+1);
00882     print_INTV(AP.PreTypes, AP.NumPreTypes+1);
00883     MesPrint("%d", AP.PreAssignFlag);
00884     MesPrint("--MARK 5");
00885     MesPrint("%d", AP.PreContinuation);
00886     MesPrint("%l", AP.InOutBuf);
00887     MesPrint("%l", AP.pSize);
00888     MesPrint("%d", AP.PreproFlag);
00889     MesPrint("%d", AP.iBufError);
00890     MesPrint("%d", AP.PreOut);
00891     MesPrint("%d", AP.PreSwitchLevel);
00892     MesPrint("%d", AP.NumPreSwitchStrings);
00893     MesPrint("%d", AP.MaxPreTypes);
00894     MesPrint("--MARK 6");
00895     MesPrint("%d", AP.NumPreTypes);
00896     MesPrint("%d", AP.DelayPrevar);
00897     MesPrint("%d", AP.AllowDelay);
00898     MesPrint("%d", AP.lhdollarerror);
00899     MesPrint("%d", AP.eat);
00900     MesPrint("%d", AP.gNumPre);
00901     MesPrint("%d", AP.PreDebug);
00902     MesPrint("--MARK 7");
00903     MesPrint("%d", AP.DebugFlag);
00904     MesPrint("%d", AP.preError);
00905     MesPrint("%C", 1, &(AP.ComChar));
00906     MesPrint("%C", 1, &(AP.cComChar));
00907     MesPrint("%%%" END P_const");
00908     /* fflush(0); */
00909 }
00910
00911 static void print_C()
00912 {
00913     int i;
00914     UBYTE buf[40], *t;
00915     MesPrint("%%%" C_const");
00916     for ( i=0; i<32; ++i ) {
00917         t = buf;
00918         t = NumCopy((WORD) (AC.separators[i].bit_7), t);
00919         t = NumCopy((WORD) (AC.separators[i].bit_6), t);
00920         t = NumCopy((WORD) (AC.separators[i].bit_5), t);
00921         t = NumCopy((WORD) (AC.separators[i].bit_4), t);
00922         t = NumCopy((WORD) (AC.separators[i].bit_3), t);
00923         t = NumCopy((WORD) (AC.separators[i].bit_2), t);
00924         t = NumCopy((WORD) (AC.separators[i].bit_1), t);
00925         t = NumCopy((WORD) (AC.separators[i].bit_0), t);
00926         MesPrint("%s ", buf);
00927     }
00928     print_NAMETREE(AC.dollarnames);
00929     print_NAMETREE(AC.exprnames);
00930     print_NAMETREE(AC.varnames);
00931     MesPrint("--MARK 1");
00932     print_LIST(&AC.ChannelList);
00933     for ( i=0; i<AC.ChannelList.num; ++i ) {
00934         MesPrint("%s %d", channels[i].name, channels[i].handle);
00935     }
00936     MesPrint("--MARK 2");
00937     print_LIST(&AC.DubiousList);
00938     MesPrint("--MARK 3");

```

```

00939     print_LIST(&AC.FunctionList);
00940     for ( i=0; i<AC.FunctionList.num; ++i ) {
00941         if ( functions[i].tabl ) {
00942             }
00943             MesPrint("%1", functions[i].symminfo);
00944             MesPrint("%1", functions[i].name);
00945             MesPrint("%d", functions[i].namesize);
00946         }
00947         MesPrint("--MARK 4");
00948         print_LIST(&AC.ExpressionList);
00949         print_LIST(&AC.IndexList);
00950         print_LIST(&AC.SetElementList);
00951         print_LIST(&AC.SetList);
00952         MesPrint("--MARK 5");
00953         print_LIST(&AC.SymbolList);
00954         print_LIST(&AC.VectorList);
00955         print_LIST(&AC.PotModDolList);
00956         print_LIST(&AC.ModOptDolList);
00957         print_LIST(&AC.TableBaseList);
00958     }
00959
00960     /*
00961     print_LIST(&AC.cbufList);
00962     for ( i=0; i<AC.cbufList.num; ++i ) {
00963         MesPrint("cbufList.num == %d", i);
00964         print_CBUF(cbuf+i);
00965     }
00966     MesPrint("%d", AC.cbufnum);
00967     */
00968     MesPrint("--MARK 6");
00969
00970     print_LIST(&AC.AutoSymbolList);
00971     print_LIST(&AC.AutoIndexList);
00972     print_LIST(&AC.AutoVectorList);
00973     print_LIST(&AC.AutoFunctionList);
00974
00975     print_NAMETREE(AC.autonames);
00976     MesPrint("--MARK 7");
00977
00978     print_LIST(AC.Symbols);
00979     print_LIST(AC.Indices);
00980     print_LIST(AC.Vectors);
00981     print_LIST(AC.Functions);
00982     MesPrint("--MARK 8");
00983
00984     print_NAMETREE(*AC.activenames);
00985
00986     MesPrint("--MARK 9");
00987
00988     MesPrint("%d", AC.AutoDeclareFlag);
00989
00990     for ( i=0; i<AC.NumStreams; ++i ) {
00991         MesPrint("Stream %d\n", i);
00992         print_STREAM(AC.Streams+i);
00993     }
00994     print_STREAM(AC.CurrentStream);
00995     MesPrint("--MARK 10");
00996
00997     print_LONGV(AC.termstack, AC.maxtermlevel);
00998     print_LONGV(AC.termstack, AC.maxtermlevel);
00999     print_VOIDP(AC.cmod, AM.MaxTal*4*sizeof(UWORD));
01000     print_WORDV((WORD *) (AC.cmod), 1);
01001     print_WORDV((WORD *) (AC.powmod), 1);
01002     print_WORDV((WORD *) AC.modpowers, 1);
01003     print_WORDV((WORD *) AC.halfmod, 1);
01004     MesPrint("--MARK 10-2");
01005     /*
01006     print_WORDV(AC.ProtoType, AC.ProtoType[1]);
01007     print_WORDV(AC.WildC, 1);
01008     */
01009
01010     MesPrint("--MARK 11");
01011     /* IfHeap ... Labels */
01012
01013     print_CHARS((UBYTE *) AC.tokens, AC.toptokens-AC.tokens);
01014     MesPrint("%1", AC.endoftokens-AC.tokens);
01015     print_WORDV(AC.tokenarglevel, AM.MaxParLevel);
01016     print_WORDV((WORD *) AC.modinverses, ABS(AC.ncmod));
01017     #ifdef WITHPTHREADS
01018     print_LONGV(AC.inputnumbers, AC.sizefirstnum+AC.sizefirstnum*sizeof(WORD)/sizeof(LONG));
01019     print_WORDV(AC.pfirstnum, 1);
01020     #endif
01021     MesPrint("--MARK 12");
01022     print_LONGV(AC.argstack, MAXNEST);
01023     print_LONGV(AC.insidestack, MAXNEST);
01024     print_LONGV(AC.inexprstack, MAXNEST);
01025     MesPrint("%1", AC.iBufferSize);

```

```

01026     MesPrint("%l", AC.TransEname);
01027     MesPrint("%l", AC.ProcessBucketSize);
01028     MesPrint("%l", AC.mProcessBucketSize);
01029     MesPrint("%l", AC.CModule);
01030     MesPrint("%l", AC.ThreadBucketSize);
01031     MesPrint("%d", AC.NoShowInput);
01032     MesPrint("%d", AC.ShortStats);
01033     MesPrint("%d", AC.compiletype);
01034     MesPrint("%d", AC.firstconstindex);
01035     MesPrint("%d", AC.insidefirst);
01036     MesPrint("%d", AC.minsidefirst);
01037     MesPrint("%d", AC.wildflag);
01038     MesPrint("%d", AC.NumLabels);
01039     MesPrint("%d", AC.MaxLabels);
01040     MesPrint("--MARK 13");
01041     MesPrint("%d", AC.lDefDim);
01042     MesPrint("%d", AC.lDefDim4);
01043     MesPrint("%d", AC.NumWildcardNames);
01044     MesPrint("%d", AC.WildcardBufferSize);
01045     MesPrint("%d", AC.MaxIf);
01046     MesPrint("%d", AC.NumStreams);
01047     MesPrint("%d", AC.MaxNumStreams);
01048     MesPrint("%d", AC.firstctypemessage);
01049     MesPrint("%d", AC.tablecheck);
01050     MesPrint("%d", AC.idoption);
01051     MesPrint("%d", AC.BottomLevel);
01052     MesPrint("%d", AC.CompileLevel);
01053     MesPrint("%d", AC.TokensWriteFlag);
01054     MesPrint("%d", AC.UnsureDollarMode);
01055     MesPrint("%d", AC.outsidefun);
01056     MesPrint("%d", AC.funpowers);
01057     MesPrint("--MARK 14");
01058     MesPrint("%d", AC.WarnFlag);
01059     MesPrint("%d", AC.StatsFlag);
01060     MesPrint("%d", AC.NamesFlag);
01061     MesPrint("%d", AC.CodesFlag);
01062     MesPrint("%d", AC.TokensWriteFlag);
01063     MesPrint("%d", AC.SetupFlag);
01064     MesPrint("%d", AC.SortType);
01065     MesPrint("%d", AC.lSortType);
01066     MesPrint("%d", AC.ThreadStats);
01067     MesPrint("%d", AC.FinalStats);
01068     MesPrint("%d", AC.ThreadsFlag);
01069     MesPrint("%d", AC.ThreadBalancing);
01070     MesPrint("%d", AC.ThreadSortFileSynch);
01071     MesPrint("%d", AC.ProcessStats);
01072     MesPrint("%d", AC.OldParallelStats);
01073     MesPrint("%d", AC.WTimeStatsFlag);
01074     MesPrint("%d", AC.BraceNormalizer);
01075     MesPrint("%d", AC.maxtermlevel);
01076     MesPrint("%d", AC.dumnumflag);
01077     MesPrint("--MARK 15");
01078     MesPrint("%d", AC.bracketindexflag);
01079     MesPrint("%d", AC.parallelflag);
01080     MesPrint("%d", AC.mparallelflag);
01081     MesPrint("%d", AC.properorderflag);
01082     MesPrint("%d", AC.vetofilling);
01083     MesPrint("%d", AC.tablefilling);
01084     MesPrint("%d", AC.vetotablebasefill);
01085     MesPrint("%d", AC.exprfillwarning);
01086     MesPrint("%d", AC.lhdollarflag);
01087     MesPrint("%d", AC.NoCompress);
01088 #ifdef WITHPTHREADS
01089     MesPrint("%d", AC.numpfirstnum);
01090     MesPrint("%d", AC.sizefirstnum);
01091 #endif
01092     MesPrint("%d", AC.RepLevel);
01093     MesPrint("%d", AC.arglevel);
01094     MesPrint("%d", AC.insidelevel);
01095     MesPrint("%d", AC.inexprlevel);
01096     MesPrint("%d", AC.termlevel);
01097     MesPrint("--MARK 16");
01098     print_WORDV(AC.argsumcheck, MAXNEST);
01099     print_WORDV(AC.insidesumcheck, MAXNEST);
01100     print_WORDV(AC.inexprsumcheck, MAXNEST);
01101     MesPrint("%d", AC.MustTestTable);
01102     MesPrint("%d", AC.DumNum);
01103     MesPrint("%d", AC.ncmod);
01104     MesPrint("%d", AC.npowmod);
01105     MesPrint("%d", AC.modmode);
01106     MesPrint("%d", AC.nhalfmod);
01107     MesPrint("%d", AC.DirtPow);
01108     MesPrint("%d", AC.lUnitTrace);
01109     MesPrint("%d", AC.NwildC);
01110     MesPrint("%d", AC.ComDefer);
01111     MesPrint("%d", AC.CollectFun);
01112     MesPrint("%d", AC.AltCollectFun);

```

```

01113     MesPrint("--MARK 17");
01114     MesPrint("%d", AC.OutputMode);
01115     MesPrint("%d", AC.Cnumpows);
01116     MesPrint("%d", AC.OutputSpaces);
01117     MesPrint("%d", AC.OutNumberType);
01118     print_WORDV(AC.lUniTrace, 4);
01119     print_WORDV(AC.RepSumCheck, MAXREPEAT);
01120     MesPrint("%d", AC.DidClean);
01121     MesPrint("%d", AC.IfLevel);
01122     MesPrint("%d", AC.WhileLevel);
01123     print_WORDV(AC.IfSumCheck, (AC.MaxIf+1));
01124     MesPrint("%d", AC.LogHandle);
01125     MesPrint("%d", AC.LineLength);
01126     MesPrint("%d", AC.StoreHandle);
01127     MesPrint("%d", AC.HideLevel);
01128     MesPrint("%d", AC.lPolyFun);
01129     MesPrint("%d", AC.lPolyFunInv);
01130     MesPrint("%d", AC.lPolyFunType);
01131     MesPrint("%d", AC.lPolyFunExp);
01132     MesPrint("%d", AC.lPolyFunVar);
01133     MesPrint("%d", AC.lPolyFunPow);
01134     MesPrint("%d", AC.SymChangeFlag);
01135     MesPrint("%d", AC.CollectPercentage);
01136     MesPrint("%d", AC.ShortStatsMax);
01137     MesPrint("--MARK 18");
01138
01139     print_CHARS(AC.Commercial, COMMERCIALSIZE+2);
01140
01141     MesPrint("%", AC.CheckpointFlag);
01142     MesPrint("%l", AC.CheckpointStamp);
01143     print_STR((unsigned char*)AC.CheckpointRunAfter);
01144     print_STR((unsigned char*)AC.CheckpointRunBefore);
01145     MesPrint("%l", AC.CheckpointInterval);
01146
01147     MesPrint("%%% END C_const");
01148     /* fflush(0); */
01149 }
01150
01151 static void print_R()
01152 {
01153     GETIDENTITY
01154     int i;
01155     MesPrint("%%% R_const");
01156     MesPrint("%l", (LONG)(AR.infile-AR.Fscr));
01157     MesPrint("%s", AR.infile->name);
01158     MesPrint("%l", (LONG)(AR.outfile-AR.Fscr));
01159     MesPrint("%s", AR.outfile->name);
01160     MesPrint("%l", AR.hidefile-AR.Fscr);
01161     MesPrint("%s", AR.hidefile->name);
01162     for ( i=0; i<3; ++i ) {
01163         MesPrint("FSCR %d", i);
01164         print_WORDB(AR.Fscr[i].PObuffer, AR.Fscr[i].POfull);
01165     }
01166     /* ... */
01167     MesPrint("%l", AR.OldTime);
01168     MesPrint("%l", AR.InInBuf);
01169     MesPrint("%l", AR.InHiBuf);
01170     MesPrint("%l", AR.pWorkSize);
01171     MesPrint("%l", AR.lWorkSize);
01172     MesPrint("%l", AR.posWorkSize);
01173     MesPrint("%d", AR.NoCompress);
01174     MesPrint("%d", AR.gzipCompress);
01175     MesPrint("%d", AR.Cnumlhs);
01176 #ifdef WITHPTHREADS
01177     MesPrint("%d", AR.exprtodo);
01178 #endif
01179     MesPrint("%d", AR.GetFile);
01180     MesPrint("%d", AR.KeptInHold);
01181     MesPrint("%d", AR.BraceOn);
01182     MesPrint("%d", AR.MaxBracket);
01183     MesPrint("%d", AR.CurDum);
01184     MesPrint("%d", AR.DeferFlag);
01185     MesPrint("%d", AR.TePos);
01186     MesPrint("%d", AR.sLevel);
01187     MesPrint("%d", AR.Stage4Name);
01188     MesPrint("%d", AR.GetOneFile);
01189     MesPrint("%d", AR.PolyFun);
01190     MesPrint("%d", AR.PolyFunInv);
01191     MesPrint("%d", AR.PolyFunType);
01192     MesPrint("%d", AR.PolyFunExp);
01193     MesPrint("%d", AR.PolyFunVar);
01194     MesPrint("%d", AR.PolyFunPow);
01195     MesPrint("%d", AR.Eside);
01196     MesPrint("%d", AR.MaxDum);
01197     MesPrint("%d", AR.level);
01198     MesPrint("%d", AR.expchanged);
01199     MesPrint("%d", AR.expflags);

```

```

01200     MesPrint("%d", AR.CurExpr);
01201     MesPrint("%d", AR.SortType);
01202     MesPrint("%d", AR.ShortSortCount);
01203     MesPrint("%%% END R_const");
01204 /*  fflush(0); */
01205 }
01206
01207 #endif /* ifdef PRINTDEBUG */
01208
01209 /*
01210     #] Debugging :
01211     #[ Cached file operation functions :
01212 */
01213
01214 #define CACHED_SNAPSHOT
01215
01216 #define CACHE_SIZE 4096
01217
01218 #ifndef CACHED_SNAPSHOT
01219 unsigned char cache_buffer[CACHE_SIZE];
01220 size_t cache_fill = 0;
01221
01222 size_t fwrite_cached(const void *ptr, size_t size, size_t nmemb, FILE *fd)
01223 {
01224     size_t fullsize = size*nmemb;
01225     if ( fullsize+cache_fill >= CACHE_SIZE ) {
01226         size_t overlap = CACHE_SIZE-cache_fill;
01227         memcpy(cache_buffer+cache_fill, (unsigned char*)ptr, overlap);
01228         if ( fwrite(cache_buffer, 1, CACHE_SIZE, fd) != CACHE_SIZE ) return 0;
01229         fullsize -= overlap;
01230         if ( fullsize >= CACHE_SIZE ) {
01231             cache_fill = fullsize % CACHE_SIZE;
01232             if ( cache_fill ) memcpy(cache_buffer, (unsigned char*)ptr+overlap+fullsize-cache_fill,
cache_fill);
01233             if ( fwrite((unsigned char*)ptr+overlap, 1, fullsize-cache_fill, fd) !=
fullsize-cache_fill ) return 0;
01234         }
01235         else {
01236             memcpy(cache_buffer, (unsigned char*)ptr+overlap, fullsize);
01237             cache_fill = fullsize;
01238         }
01239     }
01240     else {
01241         memcpy(cache_buffer+cache_fill, (unsigned char*)ptr, fullsize);
01242         cache_fill += fullsize;
01243     }
01244     return nmemb;
01245 }
01246
01247 size_t flush_cache(FILE *fd)
01248 {
01249     if ( cache_fill ) {
01250         size_t retval = fwrite(cache_buffer, 1, cache_fill, fd);
01251         if ( retval != cache_fill ) {
01252             cache_fill = 0;
01253             return 0;
01254         }
01255         cache_fill = 0;
01256     }
01257     return 1;
01258 }
01259 #else
01260 size_t fwrite_cached(const void *ptr, size_t size, size_t nmemb, FILE *fd)
01261 {
01262     return fwrite(ptr, size, nmemb, fd);
01263 }
01264
01265 size_t flush_cache(FILE *fd)
01266 {
01267     DUMMYUSE(fd)
01268     return 1;
01269 }
01270 #endif
01271
01272 /*
01273     #] Cached file operation functions :
01274     #[ Helper Macros :
01275 */
01276
01277 /* some helper macros to streamline the code in DoSnapshot() and DoRecovery() */
01278
01279 /* freeing memory */
01280
01281 #define R_FREE(ARG) \
01282     if ( ARG ) M_free(ARG, #ARG);
01283
01284 #define R_FREE_NAMETREE(ARG) \

```



```

01285     R_FREE(ARG->namenode); \
01286     R_FREE(ARG->namebuffer); \
01287     R_FREE(ARG);
01288
01289 #define R_FREE_STREAM(ARG) \
01290     R_FREE(ARG.buffer); \
01291     R_FREE(ARG.FoldName); \
01292     R_FREE(ARG.name);
01293
01294 /* reading a single variable */
01295
01296 #define R_SET(VAR,TYPE) \
01297     VAR = *((TYPE*)p); p = (unsigned char*)p + sizeof(TYPE);
01298
01299 /* general buffer */
01300
01301 #define R_COPY_B(VAR,SIZE,CAST) \
01302     VAR = (CAST)Malloc1(SIZE,#VAR); \
01303     memcpy(VAR, p, SIZE); p = (unsigned char*)p + SIZE;
01304
01305 #define S_WRITE_B(BUF,LEN) \
01306     if ( fwrite_cached(BUF, 1, LEN, fd) != (size_t)(LEN) ) return(__LINE__);
01307
01308 #define S_FLUSH_B \
01309     if ( flush_cache(fd) != 1 ) return(__LINE__);
01310
01311 /* character strings */
01312
01313 #define R_COPY_S(VAR,CAST) \
01314     if ( VAR ) { \
01315         VAR = (CAST)Malloc1(strlen(p)+1,"R_COPY_S"); \
01316         strcpy((char*)VAR, p); p = (unsigned char*)p + strlen(p) + 1; \
01317     }
01318
01319 #define S_WRITE_S(STR) \
01320     if ( STR ) { \
01321         l = strlen((char*)STR) + 1; \
01322         if ( fwrite_cached(STR, 1, l, fd) != (size_t)l ) return(__LINE__); \
01323     }
01324
01325 /* LIST */
01326
01327 #define R_COPY_LIST(ARG) \
01328     if ( ARG.maxnum ) { \
01329         R_COPY_B(ARG.lijst, ARG.size*ARG.maxnum, void*) \
01330     }
01331
01332 #define S_WRITE_LIST(LST) \
01333     if ( LST.maxnum ) { \
01334         S_WRITE_B((char*)LST.lijst, LST.maxnum*LST.size) \
01335     }
01336
01337 /* NAMETREE */
01338
01339 #define R_COPY_NAMETREE(ARG) \
01340     R_COPY_B(ARG, sizeof(NAMETREE), NAMETREE*); \
01341     if ( ARG->namenode ) { \
01342         R_COPY_B(ARG->namenode, ARG->nodesize*sizeof(NAMENODE), NAMENODE*); \
01343     } \
01344     if ( ARG->namebuffer ) { \
01345         R_COPY_B(ARG->namebuffer, ARG->namesize, UBYTE*); \
01346     }
01347
01348 #define S_WRITE_NAMETREE(ARG) \
01349     S_WRITE_B(ARG, sizeof(NAMETREE)); \
01350     if ( ARG->namenode ) { \
01351         S_WRITE_B(ARG->namenode, ARG->nodesize*sizeof(struct NaMeNode)); \
01352     } \
01353     if ( ARG->namebuffer ) { \
01354         S_WRITE_B(ARG->namebuffer, ARG->namesize); \
01355     }
01356
01357 /* DOLLAR */
01358
01359 #define S_WRITE_DOLLAR(ARG) \
01360     if ( ARG.size && ARG.where && ARG.where != &(AM.dollarzero) ) { \
01361         S_WRITE_B(ARG.where, ARG.size*sizeof(WORD)) \
01362     }
01363
01364 /* Printing time marks with ANNOUNCE macro */
01365
01366 #ifdef PRINTTIMEMARKS
01367     time_t announce_time;
01368     #define ANNOUNCE(str) time(&announce_time); MesPrint("TIMEMARK %s %s", ctime(&announce_time), #str);
01369     #else
01370     #define ANNOUNCE(str)
01371 #endif

```

```

01372
01373 /*
01374 #] Helper Macros :
01375 #[ DoRecovery :
01376 */
01377
01402 int DoRecovery(int *moduletype)
01403 {
01404     GETIDENTITY
01405     FILE *fd;
01406     POSITION pos;
01407     void *buf, *p;
01408     LONG size, l;
01409     int i, j;
01410     UBYTE *org;
01411     char *namebufout, *namebufhide;
01412     LONG ofs;
01413     void *oldAMdollarzero;
01414     LIST PotModDolListBackup;
01415     LIST ModOptDolListBackup;
01416     WORD oldLogHandle;
01417
01418     MesPrint("Recovering ... %"); fflush(0);
01419
01420     if ( !(fd = fopen(recoveryfile, "r")) ) return(__LINE__);
01421
01422     /* load the complete recovery file into a buffer */
01423     if ( fread(&pos, sizeof(POSITION), 1, fd) != 1 ) return(__LINE__);
01424     size = BASEPOSITION(pos) - sizeof(POSITION);
01425     buf = Malloc1(size, "recovery buffer");
01426     if ( fread(buf, size, 1, fd) != 1 ) return(__LINE__);
01427
01428     /* pointer p will go through the buffer in the following */
01429     p = buf;
01430
01431     /* read moduletype */
01432     R_SET(*moduletype, int);
01433
01434     /**[ AM : */
01435
01436     /* only certain elements will be restored. the rest of AM should have gotten
01437      * the correct values at startup. */
01438
01439     R_SET(AM.hparallelflag, int);
01440     R_SET(AM.gparallelflag, int);
01441     R_SET(AM.gCodesFlag, int);
01442     R_SET(AM.gNamesFlag, int);
01443     R_SET(AM.gStatsFlag, int);
01444     R_SET(AM.gTokensWriteFlag, int);
01445     R_SET(AM.gNoSpacesInNumbers, int);
01446     R_SET(AM.gIndentSpace, WORD);
01447     R_SET(AM.gUnitTrace, WORD);
01448     R_SET(AM.gDefDim, int);
01449     R_SET(AM.gDefDim4, int);
01450     R_SET(AM.gncmod, WORD);
01451     R_SET(AM.gnpowmod, WORD);
01452     R_SET(AM.gmodmode, WORD);
01453     R_SET(AM.gOutputMode, WORD);
01454     R_SET(AM.gCnumpows, WORD);
01455     R_SET(AM.gOutputSpaces, WORD);
01456     R_SET(AM.gOutNumberType, WORD);
01457     R_SET(AM.gfunpowers, int);
01458     R_SET(AM.gPolyFun, WORD);
01459     R_SET(AM.gPolyFunInv, WORD);
01460     R_SET(AM.gPolyFunType, WORD);
01461     R_SET(AM.gPolyFunExp, WORD);
01462     R_SET(AM.gPolyFunVar, WORD);
01463     R_SET(AM.gPolyFunPow, WORD);
01464     R_SET(AM.gProcessBucketSize, LONG);
01465     R_SET(AM.OldChildTime, LONG);
01466     R_SET(AM.OldSecTime, LONG);
01467     R_SET(AM.OldMilliTime, LONG);
01468     R_SET(AM.gproperorderflag, int);
01469     R_SET(AM.gThreadBucketSize, LONG);
01470     R_SET(AM.gSizeCommuteInSet, int);
01471     R_SET(AM.gThreadStats, int);
01472     R_SET(AM.gFinalStats, int);
01473     R_SET(AM.gThreadsFlag, int);
01474     R_SET(AM.gThreadBalancing, int);
01475     R_SET(AM.gThreadSortFileSynch, int);
01476     R_SET(AM.gProcessStats, int);
01477     R_SET(AM.gOldParallelStats, int);
01478     R_SET(AM.gSortType, int);
01479     R_SET(AM.gShortStatsMax, WORD);
01480     R_SET(AM.gIsFortran90, int);
01481     R_SET(oldAMdollarzero, void*);
01482     R_FREE(AM.gFortran90Kind);

```

```

01483     R_SET(AM.gFortran90Kind, UBYTE *);
01484     R_COPY_S(AM.gFortran90Kind, UBYTE *);
01485
01486     R_COPY_S(AM.gextrasy, UBYTE *);
01487     R_COPY_S(AM.ggextrasy, UBYTE *);
01488
01489     R_SET(AM.PrintTotalSize, int);
01490     R_SET(AM.fbufferize, int);
01491     R_SET(AM.gOldFactArgFlag, int);
01492     R_SET(AM.ggOldFactArgFlag, int);
01493
01494     R_SET(AM.gnumextrasy, int);
01495     R_SET(AM.ggnumextrasy, int);
01496     R_SET(AM.NumSpectatorFiles, int);
01497     R_SET(AM.SizeForSpectatorFiles, int);
01498     R_SET(AM.gOldGCDflag, int);
01499     R_SET(AM.ggOldGCDflag, int);
01500     R_SET(AM.gWTimeStatsFlag, int);
01501
01502     R_FREE(AM.Path);
01503     R_SET(AM.Path, UBYTE *);
01504     R_COPY_S(AM.Path, UBYTE *);
01505
01506     R_SET(AM.FromStdin, BOOL);
01507     R_SET(AM.IgnoreDeprecation, BOOL);
01508
01509 #ifdef PRINTDEBUG
01510     print_M();
01511 #endif
01512
01513     /*#] AM : */
01514     /*#[ AC : */
01515
01516     /* #[ AC free pointers */
01517
01518     /* AC will be overwritten by data from the recovery file, therefore
01519      * dynamically allocated memory must be freed first. */
01520
01521     R_FREE_NAMETREE(AC.dollarnames);
01522     R_FREE_NAMETREE(AC.exprnames);
01523     R_FREE_NAMETREE(AC.varnames);
01524     for ( i=0; i<AC.ChannellList.num; ++i ) {
01525         R_FREE(channels[i].name);
01526     }
01527     R_FREE(AC.ChannellList.lijst);
01528     R_FREE(AC.DubiousList.lijst);
01529     for ( i=0; i<AC.FunctionList.num; ++i ) {
01530         TABLES T = functions[i].tabl;
01531         if ( T ) {
01532             R_FREE(T->buffers);
01533             R_FREE(T->mm);
01534             R_FREE(T->flags);
01535             R_FREE(T->prototype);
01536             R_FREE(T->tablepointers);
01537             if ( T->sparse ) {
01538                 R_FREE(T->boomlijst);
01539                 R_FREE(T->argtail);
01540             }
01541             if ( T->spare ) {
01542                 R_FREE(T->spare->buffers);
01543                 R_FREE(T->spare->mm);
01544                 R_FREE(T->spare->flags);
01545                 R_FREE(T->spare->tablepointers);
01546                 if ( T->spare->sparse ) {
01547                     R_FREE(T->spare->boomlijst);
01548                 }
01549                 R_FREE(T->spare);
01550             }
01551             R_FREE(T);
01552         }
01553     }
01554     R_FREE(AC.FunctionList.lijst);
01555     for ( i=0; i<AC.ExpressionList.num; ++i ) {
01556         if ( Expressions[i].renum ) {
01557             R_FREE(Expressions[i].renum->symb.lo);
01558             R_FREE(Expressions[i].renum);
01559         }
01560         if ( Expressions[i].bracketinfo ) {
01561             R_FREE(Expressions[i].bracketinfo->indexbuffer);
01562             R_FREE(Expressions[i].bracketinfo->bracketbuffer);
01563             R_FREE(Expressions[i].bracketinfo);
01564         }
01565         if ( Expressions[i].newbracketinfo ) {
01566             R_FREE(Expressions[i].newbracketinfo->indexbuffer);
01567             R_FREE(Expressions[i].newbracketinfo->bracketbuffer);
01568             R_FREE(Expressions[i].newbracketinfo);
01569         }

```

```

01570         if ( Expressions[i].renumlists != AN.dummyrenumlist ) {
01571             R_FREE(Expressions[i].renumlists);
01572         }
01573         R_FREE(Expressions[i].inmem);
01574     }
01575     R_FREE(AC.ExpressionList.lijst);
01576     R_FREE(AC.IndexList.lijst);
01577     R_FREE(AC.SetElementList.lijst);
01578     R_FREE(AC.SetList.lijst);
01579     R_FREE(AC.SymbolList.lijst);
01580     R_FREE(AC.VectorList.lijst);
01581     for ( i=0; i<AC.TableBaseList.num; ++i ) {
01582         R_FREE(tablebases[i].iblocks);
01583         R_FREE(tablebases[i].nblocks);
01584         R_FREE(tablebases[i].name);
01585         R_FREE(tablebases[i].fullname);
01586         R_FREE(tablebases[i].tablenames);
01587     }
01588     R_FREE(AC.TableBaseList.lijst);
01589     for ( i=0; i<AC.cbufList.num; ++i ) {
01590         R_FREE(cbuf[i].Buffer);
01591         R_FREE(cbuf[i].lhs);
01592         R_FREE(cbuf[i].rhs);
01593         R_FREE(cbuf[i].boomlijst);
01594     }
01595     R_FREE(AC.cbufList.lijst);
01596     R_FREE(AC.AutoSymbolList.lijst);
01597     R_FREE(AC.AutoIndexList.lijst);
01598     R_FREE(AC.AutoVectorList.lijst);
01599     /* Tables cannot be auto-declared, therefore no extra code here */
01600     R_FREE(AC.AutoFunctionList.lijst);
01601     R_FREE_NAMETREE(AC.autonames);
01602     for ( i=0; i<AC.NumStreams; ++i ) {
01603         R_FREE_STREAM(AC.Streams[i]);
01604     }
01605     R_FREE(AC.Streams);
01606     R_FREE(AC.termstack);
01607     R_FREE(AC.termsortstack);
01608     R_FREE(AC.cmod);
01609     R_FREE(AC.modpowers);
01610     R_FREE(AC.halfmod);
01611     R_FREE(AC.IfHeap);
01612     R_FREE(AC.IfCount);
01613     R_FREE(AC.iBuffer);
01614     for ( i=0; i<AC.NumLabels; ++i ) {
01615         R_FREE(AC.LabelNames[i]);
01616     }
01617     R_FREE(AC.LabelNames);
01618     R_FREE(AC.FixIndices);
01619     R_FREE(AC.termsumcheck);
01620     R_FREE(AC.WildcardNames);
01621     R_FREE(AC.tokens);
01622     R_FREE(AC.tokenarglevel);
01623     R_FREE(AC.modinverses);
01624     R_FREE(AC.Fortran90Kind);
01625 #ifdef WITHPTHREADS
01626     R_FREE(AC.inputnumbers);
01627 #endif
01628     R_FREE(AC.IfSumCheck);
01629     R_FREE(AC.CommuteInSet);
01630     R_FREE(AC.CheckpointRunAfter);
01631     R_FREE(AC.CheckpointRunBefore);
01632
01633     /* #] AC free pointers */
01634
01635     /* backup some lists in order to restore it to the initial setup */
01636     PotModDolListBackup = AC.PotModDolList;
01637     ModOptDolListBackup = AC.ModOptDolList;
01638     oldLogHandle = AC.LogHandle;
01639
01640     /* first we copy AC as a whole and then restore the pointer structures step
01641        by step. */
01642
01643     AC = *((struct C_const*)p); p = (unsigned char*)p + sizeof(struct C_const);
01644
01645     R_COPY_NAMETREE(AC.dollarnames);
01646     R_COPY_NAMETREE(AC.exprnames);
01647     R_COPY_NAMETREE(AC.varnames);
01648
01649     R_COPY_LIST(AC.ChannelList);
01650     for ( i=0; i<AC.ChannelList.num; ++i ) {
01651         R_COPY_S(channels[i].name, char*);
01652         channels[i].handle = ReOpenFile(channels[i].name);
01653     }
01654     AC.ChannelList.message = "channel buffer";
01655
01656     AC.DubiousList.lijst = 0;

```

```

01657     AC.DubiousList.message = "ambiguous variable";
01658     AC.DubiousList.num =
01659     AC.DubiousList.maxnum =
01660     AC.DubiousList.numglobal =
01661     AC.DubiousList.numtemp =
01662     AC.DubiousList.numclear = 0;
01663
01664     R_COPY_LIST(AC.FunctionList);
01665     for ( i=0; i<AC.FunctionList.num; ++i ) {
01666         if ( functions[i].tabl ) {
01667             TABLES tabl;
01668             R_COPY_B(tabl, sizeof(struct TableEs), TABLES);
01669             functions[i].tabl = tabl;
01670             if ( tabl->tablepointers ) {
01671                 if ( tabl->sparse ) {
01672                     R_COPY_B(tabl->tablepointers,
01673                             tabl->reserved*sizeof(WORD)*(tabl->numind+TABLEEXTENSION),
01674                             WORD*);
01675                 }
01676                 else {
01677                     R_COPY_B(tabl->tablepointers,
01678                             TABLEEXTENSION*sizeof(WORD)*(tabl->totind), WORD*);
01679                 }
01680             }
01681             org = (UBYTE*)tabl->prototype;
01682 #ifdef WITHPTHREADS
01683             R_COPY_B(tabl->prototype, tabl->prototypeSize, WORD*);
01684             ofs = (UBYTE*)tabl->prototype - org;
01685             for ( j=0; j<AM.totalnumberofthreads; ++j ) {
01686                 if ( tabl->prototype[j] ) {
01687                     tabl->prototype[j] = (WORD*)((UBYTE*)tabl->prototype[j] + ofs);
01688                 }
01689             }
01690             if ( tabl->pattern ) {
01691                 tabl->pattern = (WORD*)((UBYTE*)tabl->pattern + ofs);
01692                 for ( j=0; j<AM.totalnumberofthreads; ++j ) {
01693                     if ( tabl->pattern[j] ) {
01694                         tabl->pattern[j] = (WORD*)((UBYTE*)tabl->pattern[j] + ofs);
01695                     }
01696                 }
01697             }
01698 #else
01699             ofs = tabl->pattern - tabl->prototype;
01700             R_COPY_B(tabl->prototype, tabl->prototypeSize, WORD*);
01701             if ( tabl->pattern ) {
01702                 tabl->pattern = tabl->prototype + ofs;
01703             }
01704 #endif
01705             R_COPY_B(tabl->mm, tabl->numind*(LONG)sizeof(MINMAX), MINMAX*);
01706             R_COPY_B(tabl->flags, tabl->numind*(LONG)sizeof(WORD), WORD*);
01707             if ( tabl->sparse ) {
01708                 R_COPY_B(tabl->boomlijst, tabl->MaxTreeSize*(LONG)sizeof(COMPTREE), COMPTREE*);
01709                 R_COPY_S(tabl->argtail, UBYTE*);
01710             }
01711             R_COPY_B(tabl->buffers, tabl->buffersize*(LONG)sizeof(WORD), WORD*);
01712             if ( tabl->spare ) {
01713                 TABLES spare;
01714                 R_COPY_B(spare, sizeof(struct TableEs), TABLES);
01715                 tabl->spare = spare;
01716                 if ( spare->tablepointers ) {
01717                     if ( spare->sparse ) {
01718                         R_COPY_B(spare->tablepointers,
01719                                 spare->reserved*sizeof(WORD)*(spare->numind+TABLEEXTENSION),
01720                                 WORD*);
01721                     }
01722                     else {
01723                         R_COPY_B(spare->tablepointers,
01724                                 TABLEEXTENSION*sizeof(WORD)*(spare->totind), WORD*);
01725                     }
01726                 }
01727                 spare->prototype = tabl->prototype;
01728                 spare->pattern = tabl->pattern;
01729                 R_COPY_B(spare->mm, spare->numind*(LONG)sizeof(MINMAX), MINMAX*);
01730                 R_COPY_B(spare->flags, spare->numind*(LONG)sizeof(WORD), WORD*);
01731                 if ( tabl->sparse ) {
01732                     R_COPY_B(spare->boomlijst, spare->MaxTreeSize*(LONG)sizeof(COMPTREE), COMPTREE*);
01733                     spare->argtail = tabl->argtail;
01734                 }
01735                 spare->spare = tabl;
01736                 R_COPY_B(spare->buffers, spare->buffersize*(LONG)sizeof(WORD), WORD*);
01737             }
01738         }
01739     }
01740     AC.FunctionList.message = "function";
01741
01742     R_COPY_LIST(AC.ExpressionList);
01743     for ( i=0; i<AC.ExpressionList.num; ++i ) {

```

```

01744     EXPRESSIONS ex = Expressions + i;
01745     if ( ex->renum ) {
01746         R_COPY_B(ex->renum, sizeof(struct ReNuMbEr), RENUMBER);
01747         org = (UBYTE*)ex->renum->symb.lo;
01748         R_SET(size, size_t);
01749         R_COPY_B(ex->renum->symb.lo, size, WORD*);
01750         ofs = (UBYTE*)ex->renum->symb.lo - org;
01751         ex->renum->symb.start = (WORD*) ((UBYTE*)ex->renum->symb.start + ofs);
01752         ex->renum->symb.hi = (WORD*) ((UBYTE*)ex->renum->symb.hi + ofs);
01753         ex->renum->indi.lo = (WORD*) ((UBYTE*)ex->renum->indi.lo + ofs);
01754         ex->renum->indi.start = (WORD*) ((UBYTE*)ex->renum->indi.start + ofs);
01755         ex->renum->indi.hi = (WORD*) ((UBYTE*)ex->renum->indi.hi + ofs);
01756         ex->renum->vect.lo = (WORD*) ((UBYTE*)ex->renum->vect.lo + ofs);
01757         ex->renum->vect.start = (WORD*) ((UBYTE*)ex->renum->vect.start + ofs);
01758         ex->renum->vect.hi = (WORD*) ((UBYTE*)ex->renum->vect.hi + ofs);
01759         ex->renum->func.lo = (WORD*) ((UBYTE*)ex->renum->func.lo + ofs);
01760         ex->renum->func.start = (WORD*) ((UBYTE*)ex->renum->func.start + ofs);
01761         ex->renum->func.hi = (WORD*) ((UBYTE*)ex->renum->func.hi + ofs);
01762         ex->renum->symnum = (WORD*) ((UBYTE*)ex->renum->symnum + ofs);
01763         ex->renum->indnum = (WORD*) ((UBYTE*)ex->renum->indnum + ofs);
01764         ex->renum->vecnum = (WORD*) ((UBYTE*)ex->renum->vecnum + ofs);
01765         ex->renum->funnum = (WORD*) ((UBYTE*)ex->renum->funnum + ofs);
01766     }
01767     if ( ex->bracketinfo ) {
01768         R_COPY_B(ex->bracketinfo, sizeof(BRACKETINFO), BRACKETINFO*);
01769         R_COPY_B(ex->bracketinfo->indexbuffer,
01770 ex->bracketinfo->indexbuffersize*sizeof(BRACKETINDEX), BRACKETINDEX*);
01771         R_COPY_B(ex->bracketinfo->bracketbuffer, ex->bracketinfo->bracketbuffersize*sizeof(WORD),
01772 WORD*);
01773     }
01774     if ( ex->newbracketinfo ) {
01775         R_COPY_B(ex->newbracketinfo, sizeof(BRACKETINFO), BRACKETINFO*);
01776         R_COPY_B(ex->newbracketinfo->indexbuffer,
01777 ex->newbracketinfo->indexbuffersize*sizeof(BRACKETINDEX), BRACKETINDEX*);
01778         R_COPY_B(ex->newbracketinfo->bracketbuffer,
01779 ex->newbracketinfo->bracketbuffersize*sizeof(WORD), WORD*);
01780     }
01781 #ifdef WITHPTHREADS
01782     ex->renumlists = 0;
01783 #else
01784     ex->renumlists = AN.dummyrenumlist;
01785 #endif
01786     if ( ex->inmem ) {
01787         R_SET(size, size_t);
01788         R_COPY_B(ex->inmem, size, WORD*);
01789     }
01790     AC.ExpressionList.message = "expression";
01791     R_COPY_LIST(AC.IndexList);
01792     AC.IndexList.message = "index";
01793     R_COPY_LIST(AC.SetElementList);
01794     AC.SetElementList.message = "set element";
01795     R_COPY_LIST(AC.SetList);
01796     AC.SetList.message = "set";
01797     R_COPY_LIST(AC.SymbolList);
01798     AC.SymbolList.message = "symbol";
01799     R_COPY_LIST(AC.VectorList);
01800     AC.VectorList.message = "vector";
01801     AC.PotModDolList = PotModDolListBackup;
01802     AC.ModOptDolList = ModOptDolListBackup;
01803     R_COPY_LIST(AC.TableBaseList);
01804     for ( i=0; i<AC.TableBaseList.num; ++i ) {
01805         if ( tablebases[i].iblocks ) {
01806             R_COPY_B(tablebases[i].iblocks,
01807 tablebases[i].info.numberofindexblocks*sizeof(INDEXBLOCK*), INDEXBLOCK**);
01808             for ( j=0; j<tablebases[i].info.numberofindexblocks; ++j ) {
01809                 if ( tablebases[i].iblocks[j] ) {
01810                     R_COPY_B(tablebases[i].iblocks[j], sizeof(INDEXBLOCK), INDEXBLOCK*);
01811                 }
01812             }
01813             if ( tablebases[i].nblocks ) {
01814                 R_COPY_B(tablebases[i].nblocks,
01815 tablebases[i].info.numberofnamesblocks*sizeof(NAMESBLOCK*), NAMESBLOCK**);
01816                 for ( j=0; j<tablebases[i].info.numberofindexblocks; ++j ) {
01817                     if ( tablebases[i].nblocks[j] ) {
01818                         R_COPY_B(tablebases[i].nblocks[j], sizeof(NAMESBLOCK), NAMESBLOCK*);
01819                     }
01820                 }
01821             }
01822             /* reopen file */
01823             if ( ( tablebases[i].handle = fopen(tablebases[i].fullname, "r+b") ) == NULL ) {
01824                 MesPrint("ERROR: Could not reopen tablebase %s!", tablebases[i].name);
01825                 Terminate(-1);
01826             }
01827         }
01828     }

```

```

01825     }
01826     R_COPY_S(tablebases[i].name,char*);
01827     R_COPY_S(tablebases[i].fullname,char*);
01828     R_COPY_S(tablebases[i].tablenames,char*);
01829 }
01830 AC.TableBaseList.message = "list of tablebases";
01831
01832 R_COPY_LIST(AC.cbufList);
01833 for ( i=0; i<AC.cbufList.num; ++i ) {
01834     org = (UBYTE*)cbuf[i].Buffer;
01835     R_COPY_B(cbuf[i].Buffer, cbuf[i].BufferSize*sizeof(WORD), WORD*);
01836     ofs = (UBYTE*)cbuf[i].Buffer - org;
01837     cbuf[i].Top = (WORD*)((UBYTE*)cbuf[i].Top + ofs);
01838     cbuf[i].Pointer = (WORD*)((UBYTE*)cbuf[i].Pointer + ofs);
01839     R_COPY_B(cbuf[i].lhs, cbuf[i].maxlhs*(LONG)sizeof(WORD*), WORD**);
01840     for ( j=1; j<=cbuf[i].numlhs; ++j ) {
01841         if ( cbuf[i].lhs[j] ) cbuf[i].lhs[j] = (WORD*)((UBYTE*)cbuf[i].lhs[j] + ofs);
01842     }
01843     org = (UBYTE*)cbuf[i].rhs;
01844     R_COPY_B(cbuf[i].rhs, cbuf[i].maxrhs*(LONG)(sizeof(WORD*)+2*sizeof(LONG)+2*sizeof(WORD)),
WORD**);
01845     for ( j=1; j<=cbuf[i].numrhs; ++j ) {
01846         if ( cbuf[i].rhs[j] ) cbuf[i].rhs[j] = (WORD*)((UBYTE*)cbuf[i].rhs[j] + ofs);
01847     }
01848     ofs = (UBYTE*)cbuf[i].rhs - org;
01849     cbuf[i].CanCommu = (LONG*)((UBYTE*)cbuf[i].CanCommu + ofs);
01850     cbuf[i].NumTerms = (LONG*)((UBYTE*)cbuf[i].NumTerms + ofs);
01851     cbuf[i].numdum = (WORD*)((UBYTE*)cbuf[i].numdum + ofs);
01852     cbuf[i].dimension = (WORD*)((UBYTE*)cbuf[i].dimension + ofs);
01853     if ( cbuf[i].boomlijst ) {
01854         R_COPY_B(cbuf[i].boomlijst, cbuf[i].MaxTreeSize*sizeof(COMPTREE), COMPTREE*);
01855     }
01856 }
01857 AC.cbufList.message = "compiler buffer";
01858
01859 R_COPY_LIST(AC.AutoSymbolList);
01860 AC.AutoSymbolList.message = "autosymbol";
01861 R_COPY_LIST(AC.AutoIndexList);
01862 AC.AutoIndexList.message = "autoindex";
01863 R_COPY_LIST(AC.AutoVectorList);
01864 AC.AutoVectorList.message = "autovector";
01865 R_COPY_LIST(AC.AutoFunctionList);
01866 AC.AutoFunctionList.message = "autofunction";
01867
01868 R_COPY_NAMETREE(AC.autonames);
01869
01870 AC.Symbols = &(AC.SymbolList);
01871 AC.Indices = &(AC.IndexList);
01872 AC.Vectors = &(AC.VectorList);
01873 AC.Functions = &(AC.FunctionList);
01874 AC.activenames = &(AC.varnames);
01875
01876 org = (UBYTE*)AC.Streams;
01877 R_COPY_B(AC.Streams, AC.MaxNumStreams*(LONG)sizeof(STREAM), STREAM*);
01878 for ( i=0; i<AC.NumStreams; ++i ) {
01879     if ( AC.Streams[i].type != FILESTREAM ) {
01880         UBYTE *org2;
01881         org2 = AC.Streams[i].buffer;
01882         if ( AC.Streams[i].inbuffer ) {
01883             R_COPY_B(AC.Streams[i].buffer, AC.Streams[i].inbuffer, UBYTE*);
01884         }
01885         ofs = AC.Streams[i].buffer - org2;
01886         AC.Streams[i].pointer += ofs;
01887         AC.Streams[i].top += ofs;
01888     }
01889     else {
01890         p = (unsigned char*)p + AC.Streams[i].inbuffer;
01891     }
01892     AC.Streams[i].buffersize = AC.Streams[i].inbuffer;
01893     R_COPY_S(AC.Streams[i].FoldName,UBYTE*);
01894     R_COPY_S(AC.Streams[i].name,UBYTE*);
01895     if ( AC.Streams[i].type == PREVARSTREAM || AC.Streams[i].type == DOLLARSTREAM ) {
01896         AC.Streams[i].pname = AC.Streams[i].name;
01897     }
01898     else if ( AC.Streams[i].type == FILESTREAM ) {
01899         UBYTE *org2;
01900         org2 = AC.Streams[i].buffer;
01901         AC.Streams[i].buffer = (UBYTE*)Malloc1(AC.Streams[i].buffersize, "buffer");
01902         ofs = AC.Streams[i].buffer - org2;
01903         AC.Streams[i].pointer += ofs;
01904         AC.Streams[i].top += ofs;
01905
01906         /* open file except for already opened main input file */
01907         if ( i ) {
01908             AC.Streams[i].handle = OpenFile((char *) (AC.Streams[i].name));
01909             if ( AC.Streams[i].handle == -1 ) {
01910                 MesPrint("ERROR: Could not reopen stream %s!",AC.Streams[i].name);

```

```

01911         Terminate(-1);
01912     }
01913 }
01914
01915     PUTZERO(pos);
01916     ADDPOS(pos, AC.Streams[i].bufferposition);
01917     SeekFile(AC.Streams[i].handle, &pos, SEEK_SET);
01918
01919     AC.Streams[i].inbuffer = ReadFile(AC.Streams[i].handle, AC.Streams[i].buffer,
AC.Streams[i].inbuffer);
01920
01921     SETBASEPOSITION(pos, AC.Streams[i].fileposition);
01922     SeekFile(AC.Streams[i].handle, &pos, SEEK_SET);
01923 }
01924 /*
01925  * Ideally, we should check if we have a type PREREADSTREAM, PREREADSTREAM2, and
01926  * PRECALCSTREAM here. If so, we should free element name and point it
01927  * to the name element of the embracing stream's struct. In practice,
01928  * this is undoable without adding new data to STREAM. Since we create
01929  * only a small memory leak here (some few byte for each existing
01930  * stream of these types) and only once when we do a recovery, we
01931  * tolerate this leak and keep it STREAM as it is.
01932  */
01933 }
01934 ofs = (UBYTE*)AC.Streams - org;
01935 AC.CurrentStream = (STREAM*)((UBYTE*)AC.CurrentStream + ofs);
01936
01937 if ( AC.termstack ) {
01938     R_COPY_B(AC.termstack, AC.maxtermlevel*(LONG)sizeof(LONG), LONG*);
01939 }
01940
01941 if ( AC.termstack ) {
01942     R_COPY_B(AC.termstack, AC.maxtermlevel*(LONG)sizeof(LONG), LONG*);
01943 }
01944
01945 /* exception: here we also change values from struct AM */
01946 R_COPY_B(AC.cmod, AM.MaxTal*4*(LONG)sizeof(WORD), WORD*);
01947 AM.gcmmod = AC.cmod + AM.MaxTal;
01948 AC.powmod = AM.gcmmod + AM.MaxTal;
01949 AM.gpowmod = AC.powmod + AM.MaxTal;
01950
01951 AC.modpowers = 0;
01952 AC.halfmod = 0;
01953
01954 /* we don't care about AC.ProtoType/WildC */
01955
01956 if ( AC.IfHeap ) {
01957     ofs = AC.IfStack - AC.IfHeap;
01958     R_COPY_B(AC.IfHeap, (LONG)sizeof(LONG)*(AC.MaxIf+1), LONG*);
01959     AC.IfStack = AC.IfHeap + ofs;
01960     R_COPY_B(AC.IfCount, (LONG)sizeof(LONG)*(AC.MaxIf+1), LONG*);
01961 }
01962
01963 org = AC.iBuffer;
01964 size = AC.iStop - AC.iBuffer + 2;
01965 R_COPY_B(AC.iBuffer, size, UBYTE*);
01966 ofs = AC.iBuffer - org;
01967 AC.iPointer += ofs;
01968 AC.iStop += ofs;
01969
01970 if ( AC.LabelNames ) {
01971     org = (UBYTE*)AC.LabelNames;
01972     R_COPY_B(AC.LabelNames, AC.MaxLabels*(LONG)(sizeof(UBYTE*)+sizeof(WORD)), UBYTE*);
01973     for ( i=0; i<AC.NumLabels; ++i ) {
01974         R_COPY_S(AC.LabelNames[i], UBYTE*);
01975     }
01976     ofs = (UBYTE*)AC.LabelNames - org;
01977     AC.Labels = (int*)((UBYTE*)AC.Labels + ofs);
01978 }
01979
01980 R_COPY_B(AC.FixIndices, AM.OffsetIndex*(LONG)sizeof(WORD), WORD*);
01981
01982 if ( AC.termsumcheck ) {
01983     R_COPY_B(AC.termsumcheck, AC.maxtermlevel*(LONG)sizeof(WORD), WORD*);
01984 }
01985
01986 R_COPY_B(AC.WildcardNames, AC.WildcardBufferSize, UBYTE*);
01987
01988 if ( AC.tokens ) {
01989     size = AC.toptokens - AC.tokens;
01990     if ( size ) {
01991         org = (UBYTE*)AC.tokens;
01992         R_COPY_B(AC.tokens, size, SBYTE*);
01993         ofs = (UBYTE*)AC.tokens - org;
01994         AC.endoftokens += ofs;
01995         AC.toptokens += ofs;
01996     }

```



```

01997         else {
01998             AC.tokens = 0;
01999             AC.endoftokens = AC.tokens;
02000             AC.toptokens = AC.tokens;
02001         }
02002     }
02003
02004     R_COPY_B(AC.tokenarglevel, AM.MaxParLevel*(LONG)sizeof(WORD), WORD*);
02005
02006     AC.modinverses = 0;
02007
02008     R_COPY_S(AC.Fortran90Kind, UBYTE *);
02009
02010 #ifdef WITHPTHREADS
02011     if ( AC.inputnumbers ) {
02012         org = (UBYTE*)AC.inputnumbers;
02013         R_COPY_B(AC.inputnumbers, AC.sizepfirstnum*(LONG)(sizeof(WORD)+sizeof(LONG)), LONG*);
02014         ofs = (UBYTE*)AC.inputnumbers - org;
02015         AC.pfirstnum = (WORD*)((UBYTE*)AC.pfirstnum + ofs);
02016     }
02017     AC.halfmodlock = dummylock;
02018 #endif /* ifdef WITHPTHREADS */
02019
02020     if ( AC.IfSumCheck ) {
02021         R_COPY_B(AC.IfSumCheck, (LONG)sizeof(WORD)*(AC.MaxIf+1), WORD*);
02022     }
02023     if ( AC.CommuteInSet ) {
02024         R_COPY_B(AC.CommuteInSet, (LONG)sizeof(WORD)*(AC.SizeCommuteInSet+1), WORD*);
02025     }
02026
02027     AC.LogHandle = oldLogHandle;
02028
02029     R_COPY_S(AC.CheckpointRunAfter, char*);
02030     R_COPY_S(AC.CheckpointRunBefore, char*);
02031
02032     R_COPY_S(AC.extrasym, UBYTE *);
02033
02034 #ifdef PRINTDEBUG
02035     print_C();
02036 #endif
02037
02038     /*#] AC : */
02039     /*#[ AP : */
02040
02041     /* #[ AP free pointers */
02042
02043     /* AP will be overwritten by data from the recovery file, therefore
02044      * dynamically allocated memory must be freed first. */
02045
02046     for ( i=0; i<AP.DollarList.num; ++i ) {
02047         if ( Dollars[i].size ) {
02048             R_FREE(Dollars[i].where);
02049         }
02050         CleanDollarFactors(Dollars+i);
02051     }
02052     R_FREE(AP.DollarList.lijst);
02053
02054     for ( i=0; i<AP.PreVarList.num; ++i ) {
02055         R_FREE(PreVar[i].name);
02056     }
02057     R_FREE(AP.PreVarList.lijst);
02058
02059     for ( i=0; i<AP.LoopList.num; ++i ) {
02060         R_FREE(DoLoops[i].p.buffer);
02061         if ( DoLoops[i].dollarname ) {
02062             R_FREE(DoLoops[i].dollarname);
02063         }
02064     }
02065     R_FREE(AP.LoopList.lijst);
02066
02067     for ( i=0; i<AP.ProcList.num; ++i ) {
02068         R_FREE(Procedures[i].p.buffer);
02069         R_FREE(Procedures[i].name);
02070     }
02071     R_FREE(AP.ProcList.lijst);
02072
02073     for ( i=1; i<=AP.PreSwitchLevel; ++i ) {
02074         R_FREE(AP.PreSwitchStrings[i]);
02075     }
02076     R_FREE(AP.PreSwitchStrings);
02077     R_FREE(AP.preStart);
02078     R_FREE(AP.procedureExtension);
02079     R_FREE(AP.cprocedureExtension);
02080     R_FREE(AP.PreIfStack);
02081     R_FREE(AP.PreSwitchModes);
02082     R_FREE(AP.PreTypes);
02083

```

```

02084      /* #] AP free pointers */
02085
02086      /* first we copy AP as a whole and then restore the pointer structures step
02087      by step. */
02088
02089      AP = *((struct P_const*)p); p = (unsigned char*)p + sizeof(struct P_const);
02090 #ifdef WITHPTHREADS
02091      AP.PreVarLock = dummylock;
02092 #endif
02093
02094      R_COPY_LIST(AP.DollarList);
02095      for ( i=0; i<AP.DollarList.num; ++i ) {
02096          DOLLARS d = Dollars + i;
02097          size = d->size * sizeof(WORD);
02098          if ( size && d->where && d->where != oldAMDollarzero ) {
02099              R_COPY_B(d->where, size, void*);
02100          }
02101 #ifdef WITHPTHREADS
02102          d->pthreadlockread = dummylock;
02103          d->pthreadlockwrite = dummylock;
02104 #endif
02105          if ( d->nfactors > 1 ) {
02106              R_COPY_B(d->factors, sizeof(FACDOLLAR)*d->nfactors, FACDOLLAR*);
02107              for ( j = 0; j < d->nfactors; j++ ) {
02108                  if ( d->factors[j].size > 0 ) {
02109                      R_COPY_B(d->factors[j].where, sizeof(WORD)*(d->factors[j].size+1), WORD*);
02110                  }
02111              }
02112          }
02113      }
02114      AP.DollarList.message = "$-variable";
02115
02116      R_COPY_LIST(AP.PreVarList);
02117      for ( i=0; i<AP.PreVarList.num; ++i ) {
02118          R_SET(size, size_t);
02119          org = PreVar[i].name;
02120          R_COPY_B(PreVar[i].name, size, UBYTE*);
02121          ofs = PreVar[i].name - org;
02122          if ( PreVar[i].value ) PreVar[i].value += ofs;
02123          if ( PreVar[i].argnames ) PreVar[i].argnames += ofs;
02124      }
02125      AP.PreVarList.message = "PreVariable";
02126
02127      R_COPY_LIST(AP.LoopList);
02128      for ( i=0; i<AP.LoopList.num; ++i ) {
02129          org = DoLoops[i].p.buffer;
02130          R_COPY_B(DoLoops[i].p.buffer, DoLoops[i].p.size, UBYTE*);
02131          ofs = DoLoops[i].p.buffer - org;
02132          if ( DoLoops[i].name ) DoLoops[i].name += ofs;
02133          if ( DoLoops[i].vars ) DoLoops[i].vars += ofs;
02134          if ( DoLoops[i].contents ) DoLoops[i].contents += ofs;
02135          if ( DoLoops[i].type == ONEEXPRESSION ) {
02136              R_COPY_S(DoLoops[i].dollarname, UBYTE*);
02137          }
02138      }
02139      AP.LoopList.message = "doloop";
02140
02141      R_COPY_LIST(AP.ProcList);
02142      for ( i=0; i<AP.ProcList.num; ++i ) {
02143          if ( Procedures[i].p.size ) {
02144              if ( Procedures[i].loadmode != 1 ) {
02145                  R_COPY_B(Procedures[i].p.buffer, Procedures[i].p.size, UBYTE*);
02146              }
02147              else {
02148                  R_SET(j, int);
02149                  Procedures[i].p.buffer = Procedures[j].p.buffer;
02150              }
02151          }
02152          R_COPY_S(Procedures[i].name, UBYTE*);
02153      }
02154      AP.ProcList.message = "procedure";
02155
02156      size = (AP.NumPreSwitchStrings+1)*(LONG)sizeof(UBYTE*);
02157      R_COPY_B(AP.PreSwitchStrings, size, UBYTE*);
02158      for ( i=1; i<=AP.PreSwitchLevel; ++i ) {
02159          R_COPY_S(AP.PreSwitchStrings[i], UBYTE*);
02160      }
02161
02162      org = AP.preStart;
02163      R_COPY_B(AP.preStart, AP.pSize, UBYTE*);
02164      ofs = AP.preStart - org;
02165      if ( AP.preFill ) AP.preFill += ofs;
02166      if ( AP.preStop ) AP.preStop += ofs;
02167
02168      R_COPY_S(AP.procedureExtension, UBYTE*);
02169      R_COPY_S(AP.cprocedureExtension, UBYTE*);
02170

```

```

02171     R_COPY_B(AP.PreAssignStack, AP.MaxPreAssignLevel*(LONG)sizeof(LONG), LONG*);
02172     R_COPY_B(AP.PreIfStack, AP.MaxPreIfLevel*(LONG)sizeof(int), int*);
02173     R_COPY_B(AP.PreSwitchModes, (AP.NumPreSwitchStrings+1)*(LONG)sizeof(int), int*);
02174     R_COPY_B(AP.PreTypes, (AP.MaxPreTypes+1)*(LONG)sizeof(int), int*);
02175
02176 #ifdef PRINTDEBUG
02177     print_P();
02178 #endif
02179
02180     /*#] AP : */
02181     /*#[ AR : */
02182
02183     R_SET(ofs, LONG);
02184     if ( ofs ) {
02185         AR.infile = AR.Fscr+1;
02186         AR.outfile = AR.Fscr;
02187         AR.hidefile = AR.Fscr+2;
02188     }
02189     else {
02190         AR.infile = AR.Fscr;
02191         AR.outfile = AR.Fscr+1;
02192         AR.hidefile = AR.Fscr+2;
02193     }
02194
02195     /* #[ AR free pointers */
02196
02197     /* Parts of AR will be overwritten by data from the recovery file, therefore
02198      * dynamically allocated memory must be freed first. */
02199
02200     namebufout = AR.outfile->name;
02201     namebufhide = AR.hidefile->name;
02202     R_FREE(AR.outfile->PObuffer);
02203 #ifdef WITHZLIB
02204     R_FREE(AR.outfile->zsp);
02205     R_FREE(AR.outfile->ziobuffer);
02206 #endif
02207     namebufhide = AR.hidefile->name;
02208     R_FREE(AR.hidefile->PObuffer);
02209 #ifdef WITHZLIB
02210     R_FREE(AR.hidefile->zsp);
02211     R_FREE(AR.hidefile->ziobuffer);
02212 #endif
02213     /* no files should be opened -> nothing to do with handle */
02214
02215     /* #] AR free pointers */
02216
02217     /* outfile */
02218     R_SET(*AR.outfile, FILEHANDLE);
02219     org = (UBYTE*)AR.outfile->PObuffer;
02220     size = AR.outfile->POfull - AR.outfile->PObuffer;
02221     AR.outfile->PObuffer = (WORD*)Malloc1(AR.outfile->POsize, "PObuffer");
02222     if ( size ) {
02223         memcpy(AR.outfile->PObuffer, p, size*sizeof(WORD));
02224         p = (unsigned char*)p + size*sizeof(WORD);
02225     }
02226     ofs = (UBYTE*)AR.outfile->PObuffer - org;
02227     AR.outfile->PPostop = (WORD*)((UBYTE*)AR.outfile->PPostop + ofs);
02228     AR.outfile->POfill = (WORD*)((UBYTE*)AR.outfile->POfill + ofs);
02229     AR.outfile->POfull = (WORD*)((UBYTE*)AR.outfile->POfull + ofs);
02230     AR.outfile->name = namebufout;
02231 #ifdef WITHPTHREADS
02232     AR.outfile->wPObuffer = AR.outfile->PObuffer;
02233     AR.outfile->wPPostop = AR.outfile->PPostop;
02234     AR.outfile->wPOfill = AR.outfile->POfill;
02235     AR.outfile->wPOfull = AR.outfile->POfull;
02236 #endif
02237 #ifdef WITHZLIB
02238     /* zsp and ziobuffer will be allocated when used */
02239     AR.outfile->zsp = 0;
02240     AR.outfile->ziobuffer = 0;
02241 #endif
02242     /* reopen old outfile */
02243 #ifdef WITHMPI
02244     if (PF.me==MASTER)
02245 #endif
02246     if ( AR.outfile->handle >= 0 ) {
02247         if ( CopyFile(sortfile, AR.outfile->name) ) {
02248             MesPrint("ERROR: Could not copy old output sort file %s!", sortfile);
02249             Terminate(-1);
02250         }
02251         AR.outfile->handle = ReOpenFile(AR.outfile->name);
02252         if ( AR.outfile->handle == -1 ) {
02253             MesPrint("ERROR: Could not reopen output sort file %s!", AR.outfile->name);
02254             Terminate(-1);
02255         }
02256         SeekFile(AR.outfile->handle, &AR.outfile->POposition, SEEK_SET);
02257     }

```

```

02258
02259  /* hidefile */
02260  R_SET(*AR.hidefile, FILEHANDLE);
02261  AR.hidefile->name = namebufhide;
02262  if ( AR.hidefile->PObuffer ) {
02263      org = (UBYTE*)AR.hidefile->PObuffer;
02264      size = AR.hidefile->POfull - AR.hidefile->PObuffer;
02265      AR.hidefile->PObuffer = (WORD*)Malloc1(AR.hidefile->POsize, "PObuffer");
02266      if ( size ) {
02267          memcpy(AR.hidefile->PObuffer, p, size*sizeof(WORD));
02268          p = (unsigned char*)p + size*sizeof(WORD);
02269      }
02270      ofs = (UBYTE*)AR.hidefile->PObuffer - org;
02271      AR.hidefile->POstop = (WORD*)((UBYTE*)AR.hidefile->POstop + ofs);
02272      AR.hidefile->POfill = (WORD*)((UBYTE*)AR.hidefile->POfill + ofs);
02273      AR.hidefile->POfull = (WORD*)((UBYTE*)AR.hidefile->POfull + ofs);
02274  #ifndef WITHPTHREADS
02275      AR.hidefile->wPObuffer = AR.hidefile->PObuffer;
02276      AR.hidefile->wPOstop = AR.hidefile->POstop;
02277      AR.hidefile->wPOfill = AR.hidefile->POfill;
02278      AR.hidefile->wPOfull = AR.hidefile->POfull;
02279  #endif
02280  }
02281  #ifdef WITHZLIB
02282      /* zsp and ziobuffer will be allocated when used */
02283      AR.hidefile->zsp = 0;
02284      AR.hidefile->ziobuffer = 0;
02285  #endif
02286  /* reopen old hidefile */
02287  if ( AR.hidefile->handle >= 0 ) {
02288      if ( CopyFile(hidefile, AR.hidefile->name) ) {
02289          MesPrint("ERROR: Could not copy old hide file %s!",hidefile);
02290          Terminate(-1);
02291      }
02292      AR.hidefile->handle = ReOpenFile(AR.hidefile->name);
02293      if ( AR.hidefile->handle == -1 ) {
02294          MesPrint("ERROR: Could not reopen hide file %s!",AR.hidefile->name);
02295          Terminate(-1);
02296      }
02297      SeekFile(AR.hidefile->handle, &AR.hidefile->POposition, SEEK_SET);
02298  }
02299
02300  /* store file */
02301  R_SET(pos, POSITION);
02302  if ( ISNOTZEROPOS(pos) ) {
02303      CloseFile(AR.StoreData.Handle);
02304      R_SET(AR.StoreData, FILEDATA);
02305      if ( CopyFile(storefile, FG.fname) ) {
02306          MesPrint("ERROR: Could not copy old store file %s!",storefile);
02307          Terminate(-1);
02308      }
02309      AR.StoreData.Handle = (WORD)ReOpenFile(FG.fname);
02310      SeekFile(AR.StoreData.Handle, &AR.StoreData.Position, SEEK_SET);
02311  }
02312
02313  R_SET(AR.DefPosition, POSITION);
02314  R_SET(AR.OldTime, LONG);
02315  R_SET(AR.InInBuf, LONG);
02316  R_SET(AR.InHiBuf, LONG);
02317
02318  R_SET(AR.NoCompress, int);
02319  R_SET(AR.gzipCompress, int);
02320
02321  R_SET(AR.outtohide, int);
02322
02323  R_SET(AR.GetFile, WORD);
02324  R_SET(AR.KeptInHold, WORD);
02325  R_SET(AR.BracketOn, WORD);
02326  R_SET(AR.MaxBracket, WORD);
02327  R_SET(AR.CurDum, WORD);
02328  R_SET(AR.DeferFlag, WORD);
02329  R_SET(AR.TePos, WORD);
02330  R_SET(AR.sLevel, WORD);
02331  R_SET(AR.Stage4Name, WORD);
02332  R_SET(AR.GetOneFile, WORD);
02333  R_SET(AR.PolyFun, WORD);
02334  R_SET(AR.PolyFunInv, WORD);
02335  R_SET(AR.PolyFunType, WORD);
02336  R_SET(AR.PolyFunExp, WORD);
02337  R_SET(AR.PolyFunVar, WORD);
02338  R_SET(AR.PolyFunPow, WORD);
02339  R_SET(AR.Eside, WORD);
02340  R_SET(AR.MaxDum, WORD);
02341  R_SET(AR.level, WORD);
02342  R_SET(AR.expchanged, WORD);
02343  R_SET(AR.expflags, WORD);
02344  R_SET(AR.CurExpr, WORD);

```

```

02345     R_SET(AR.SortType, WORD);
02346     R_SET(AR.ShortSortCount, WORD);
02347
02348     /* this is usually done in Process(), but sometimes FORM does not
02349        end up executing Process() before it uses the AR.CompressPointer,
02350        so we need to explicitly set it here. */
02351     AR.CompressPointer = AR.CompressBuffer;
02352
02353 #ifdef WITHPTHREADS
02354     for ( j = 0; j < AM.totalnumberofthreads; j++ ) {
02355         R_SET(AB[j]->R.wranfnpair1, int);
02356         R_SET(AB[j]->R.wranfnpair2, int);
02357         R_SET(AB[j]->R.wranfcall, int);
02358         R_SET(AB[j]->R.wranfseed, ULONG);
02359         R_SET(AB[j]->R.wranfia, ULONG*);
02360         if ( AB[j]->R.wranfia ) {
02361             R_COPY_B(AB[j]->R.wranfia, sizeof(ULONG)*AB[j]->R.wranfnpair2, ULONG*);
02362         }
02363     }
02364 #else
02365     R_SET(AR.wranfnpair1, int);
02366     R_SET(AR.wranfnpair2, int);
02367     R_SET(AR.wranfcall, int);
02368     R_SET(AR.wranfseed, ULONG);
02369     R_SET(AR.wranfia, ULONG*);
02370     if ( AR.wranfia ) {
02371         R_COPY_B(AR.wranfia, sizeof(ULONG)*AR.wranfnpair2, ULONG*);
02372     }
02373 #endif
02374
02375 #ifdef PRINTDEBUG
02376     print_R();
02377 #endif
02378
02379     /*#] AR : */
02380     /*#[ AO :*/
02381     /*
02382     We copy all non-pointer variables.
02383     */
02384     l = sizeof(A.O) - ((UBYTE *)(&(A.O.NumInBrack))-(UBYTE *)(&A.O));
02385     memcpy(&(A.O.NumInBrack), p, l); p = (unsigned char*)p + l;
02386     /*
02387     Now the variables in OptimizeResult
02388     */
02389     memcpy(&(A.O.OptimizeResult), p, sizeof(OPTIMIZERESULT));
02390     p = (unsigned char*)p + sizeof(OPTIMIZERESULT);
02391
02392     if ( A.O.OptimizeResult.codesize > 0 ) {
02393         R_COPY_B(A.O.OptimizeResult.code, A.O.OptimizeResult.codesize*sizeof(WORD), WORD *);
02394     }
02395     R_COPY_S(A.O.OptimizeResult.nameofexpr, UBYTE *);
02396     /*
02397     And now the dictionaries. We know how many there are. We also know
02398     how many elements the array AO.Dictionaries should have.
02399     */
02400     if ( AO.SizeDictionaries > 0 ) {
02401         AO.Dictionaries = (DICTIONARY **)Malloc1(AO.SizeDictionaries*sizeof(DICTIONARY *),
02402            "Dictionaries");
02403         for ( i = 0; i < AO.NumDictionaries; i++ ) {
02404             R_SET(i, LONG)
02405             AO.Dictionaries[i] = DictFromBytes(p);
02406             p = (char *)p + l;
02407         }
02408     }
02409     /*#] AO :*/
02410 #ifdef WITHMPI
02411     /*#[ PF : */
02412     /*Block*/
02413     int numtasks;
02414     R_SET(numtasks, int);
02415     if(numtasks!=PF.numtasks){
02416         MesPrint("%d number of tasks expected instead of %d; use mpirun -np %d",
02417             numtasks, PF.numtasks, numtasks);
02418         if(PF.me!=MASTER)
02419             remove(RecoveryFilename());
02420         Terminate(-1);
02421     }
02422     /*Block*/
02423     R_SET(PF.rhsInParallel, int);
02424     R_SET(PF.exprbufsize, int);
02425     R_SET(PF.log, int);
02426     /*#] PF : */
02427 #endif
02428
02429 #ifdef WITHPTHREADS
02430     /* read timing information of individual threads */
02431     R_SET(i, int);

```

```

02432     for ( j=1; j<AM.totalnumberofthreads; ++j ) {
02433         /* ... and correcting OldTime */
02434         AB[j]->R.OldTime = -(*(LONG*)p+j));
02435     }
02436     WriteTimerInfo((LONG*)p, (LONG *) ((unsigned char*)p + i*(LONG)sizeof(LONG)));
02437     p = (unsigned char*)p + 2*i*(LONG)sizeof(LONG);
02438 #endif /* ifdef WITHPTHREADS */
02439
02440     if ( fclose(fd) ) return(__LINE__);
02441
02442     M_free(buf, "recovery buffer");
02443
02444     /* cares about data in S_const */
02445     UpdatePositions();
02446     AT.SS = AT.S0;
02447 /*
02448     Set the checkpoint parameter right for the next checkpoint.
02449 */
02450     AC.CheckpointStamp = TimeWallClock(1);
02451
02452     done_snapshot = 1;
02453     MesPrint("done."); fflush(0);
02454
02455     return(0);
02456 }
02457
02458 /*
02459     #] DoRecovery :
02460     #[ DoSnapshot :
02461 */
02462
02463 static int DoSnapshot(int moduletype)
02464 {
02465     GETIDENTITY
02466     FILE *fd;
02467     POSITION pos;
02468     int i, j;
02469     LONG l;
02470     WORD *w;
02471     void *adr;
02472 #ifdef WITHPTHREADS
02473     LONG *longp, *longpp;
02474 #endif /* ifdef WITHPTHREADS */
02475
02476     MesPrint("Saving recovery point ... %"); fflush(0);
02477 #ifdef PRINTTIMEMARKS
02478     MesPrint("\n");
02479 #endif
02480
02481     if ( !(fd = fopen(intermedfile, "wb")) ) return(__LINE__);
02482
02483     /* reserve space in the file for a length field */
02484     if ( fwrite(&pos, 1, sizeof(POSITION), fd) != sizeof(POSITION) ) return(__LINE__);
02485
02486     /* write moduletype */
02487     if ( fwrite(&moduletype, 1, sizeof(int), fd) != sizeof(int) ) return(__LINE__);
02488
02489     /*#[ AM :*/
02490
02491     /* since most values don't change during execution, AM doesn't need to be
02492     * written as a whole. all values will be correctly set when starting up
02493     * anyway. only the exceptions need to be taken care of. see MakeGlobal()
02494     * and PopVariables() in execute.c. */
02495
02496     ANNOUNCE(AM)
02497     S_WRITE_B(&AM.hparallelflag, sizeof(int));
02498     S_WRITE_B(&AM.gparallelflag, sizeof(int));
02499     S_WRITE_B(&AM.gCodesFlag, sizeof(int));
02500     S_WRITE_B(&AM.gNamesFlag, sizeof(int));
02501     S_WRITE_B(&AM.gStatsFlag, sizeof(int));
02502     S_WRITE_B(&AM.gTokensWriteFlag, sizeof(int));
02503     S_WRITE_B(&AM.gNoSpacesInNumbers, sizeof(int));
02504     S_WRITE_B(&AM.gIndentSpace, sizeof(WORD));
02505     S_WRITE_B(&AM.gUnitTrace, sizeof(WORD));
02506     S_WRITE_B(&AM.gDefDim, sizeof(int));
02507     S_WRITE_B(&AM.gDefDim4, sizeof(int));
02508     S_WRITE_B(&AM.gncmod, sizeof(WORD));
02509     S_WRITE_B(&AM.gnpowmod, sizeof(WORD));
02510     S_WRITE_B(&AM.gmodmode, sizeof(WORD));
02511     S_WRITE_B(&AM.gOutputMode, sizeof(WORD));
02512     S_WRITE_B(&AM.gCnumpows, sizeof(WORD));
02513     S_WRITE_B(&AM.gOutputSpaces, sizeof(WORD));
02514     S_WRITE_B(&AM.gOutNumberType, sizeof(WORD));
02515     S_WRITE_B(&AM.gfunpowers, sizeof(int));
02516     S_WRITE_B(&AM.gPolyFun, sizeof(WORD));
02517     S_WRITE_B(&AM.gPolyFunInv, sizeof(WORD));
02518     S_WRITE_B(&AM.gPolyFunType, sizeof(WORD));

```

```

02534     S_WRITE_B(&AM.gPolyFunExp, sizeof(WORD));
02535     S_WRITE_B(&AM.gPolyFunVar, sizeof(WORD));
02536     S_WRITE_B(&AM.gPolyFunPow, sizeof(WORD));
02537     S_WRITE_B(&AM.gProcessBucketSize, sizeof(LONG));
02538     S_WRITE_B(&AM.OldChildTime, sizeof(LONG));
02539     S_WRITE_B(&AM.OldSecTime, sizeof(LONG));
02540     S_WRITE_B(&AM.OldMilliTime, sizeof(LONG));
02541     S_WRITE_B(&AM.gproperorderflag, sizeof(int));
02542     S_WRITE_B(&AM.gThreadBucketSize, sizeof(LONG));
02543     S_WRITE_B(&AM.gSizeCommuteInSet, sizeof(int));
02544     S_WRITE_B(&AM.gThreadStats, sizeof(int));
02545     S_WRITE_B(&AM.gFinalStats, sizeof(int));
02546     S_WRITE_B(&AM.gThreadsFlag, sizeof(int));
02547     S_WRITE_B(&AM.gThreadBalancing, sizeof(int));
02548     S_WRITE_B(&AM.gThreadSortFileSynch, sizeof(int));
02549     S_WRITE_B(&AM.gProcessStats, sizeof(int));
02550     S_WRITE_B(&AM.gOldParallelStats, sizeof(int));
02551     S_WRITE_B(&AM.gSortType, sizeof(int));
02552     S_WRITE_B(&AM.gShortStatsMax, sizeof(WORD));
02553     S_WRITE_B(&AM.gIsFortran90, sizeof(int));
02554     adr = &AM.dollarzero;
02555     S_WRITE_B(adr, sizeof(void*));
02556     S_WRITE_B(&AM.gFortran90Kind, sizeof(UBYTE *));
02557     S_WRITE_S(AM.gFortran90Kind);
02558
02559     S_WRITE_S(AM.gextrasymp);
02560     S_WRITE_S(AM.ggextrasymp);
02561
02562     S_WRITE_B(&AM.PrintTotalSize, sizeof(int));
02563     S_WRITE_B(&AM.fbuffersize, sizeof(int));
02564     S_WRITE_B(&AM.gOldFactArgFlag, sizeof(int));
02565     S_WRITE_B(&AM.ggOldFactArgFlag, sizeof(int));
02566
02567     S_WRITE_B(&AM.gnumextrasymp, sizeof(int));
02568     S_WRITE_B(&AM.ggnumextrasymp, sizeof(int));
02569     S_WRITE_B(&AM.NumSpectatorFiles, sizeof(int));
02570     S_WRITE_B(&AM.SizeForSpectatorFiles, sizeof(int));
02571     S_WRITE_B(&AM.gOldGCDflag, sizeof(int));
02572     S_WRITE_B(&AM.ggOldGCDflag, sizeof(int));
02573     S_WRITE_B(&AM.gWTimeStatsFlag, sizeof(int));
02574
02575     S_WRITE_B(&AM.Path, sizeof(UBYTE *));
02576     S_WRITE_S(AM.Path);
02577
02578     S_WRITE_B(&AM.FromStdin, sizeof(BOOL));
02579     S_WRITE_B(&AM.IgnoreDeprecation, sizeof(BOOL));
02580
02581     /*#] AM :*/
02582     /*#[ AC :*/
02583
02584     /* we write AC as a whole and then write all additional data step by step.
02585      * AC.DubiousList doesn't need to be treated, because it should be empty. */
02586
02587     ANNOUNCE(AC)
02588     S_WRITE_B(&AC, sizeof(struct C_const));
02589
02590     S_WRITE_NAMETREE(AC.dollarnames);
02591     S_WRITE_NAMETREE(AC.exprnames);
02592     S_WRITE_NAMETREE(AC.varnames);
02593
02594     S_WRITE_LIST(AC.ChannelList);
02595     for ( i=0; i<AC.ChannelList.num; ++i ) {
02596         S_WRITE_S(channels[i].name);
02597     }
02598
02599     ANNOUNCE(AC.FunctionList)
02600     S_WRITE_LIST(AC.FunctionList);
02601     for ( i=0; i<AC.FunctionList.num; ++i ) {
02602         /* if the function is a table */
02603         if ( functions[i].tabl ) {
02604             TABLES tabl = functions[i].tabl;
02605             S_WRITE_B(tabl, sizeof(struct TABEs));
02606             if ( tabl->tablepointers ) {
02607                 if ( tabl->sparse ) {
02608                     /* sparse tables. reserved holds number of allocated
02609                      * elements. the size of an element is numind plus
02610                      * TABLEEXTENSION times the size of WORD. */
02611                     S_WRITE_B(tabl->tablepointers,
02612                             tabl->reserved*sizeof(WORD)*(tabl->numind+TABLEEXTENSION));
02613                 }
02614                 else {
02615                     /* matrix like tables. */
02616                     S_WRITE_B(tabl->tablepointers,
02617                             TABLEEXTENSION*sizeof(WORD)*(tabl->totind));
02618                 }
02619             }
02620             S_WRITE_B(tabl->prototype, tabl->prototypeSize);

```

```

02621     S_WRITE_B(tabl->mm, tabl->numind*(LONG)sizeof(MINMAX));
02622     S_WRITE_B(tabl->flags, tabl->numind*(LONG)sizeof(WORD));
02623     if ( tabl->sparse ) {
02624         S_WRITE_B(tabl->boomlijst, tabl->MaxTreeSize*(LONG)sizeof(COMPTREE));
02625         S_WRITE_S(tabl->argtail);
02626     }
02627     S_WRITE_B(tabl->buffers, tabl->bufferssize*(LONG)sizeof(WORD));
02628     if ( tabl->sparse ) {
02629         TABLES spare = tabl->spare;
02630         S_WRITE_B(spare, sizeof(struct TaBLeS));
02631         if ( spare->tablepointers ) {
02632             if ( spare->sparse ) {
02633                 /* sparse tables */
02634                 S_WRITE_B(spare->tablepointers,
02635                     spare->reserved*sizeof(WORD)*(spare->numind+TABLEEXTENSION));
02636             }
02637             else {
02638                 /* matrix like tables */
02639                 S_WRITE_B(spare->tablepointers,
02640                     TABLEEXTENSION*sizeof(WORD)*(spare->totind));
02641             }
02642         }
02643         S_WRITE_B(spare->mm, spare->numind*(LONG)sizeof(MINMAX));
02644         S_WRITE_B(spare->flags, spare->numind*(LONG)sizeof(WORD));
02645         if ( spare->sparse ) {
02646             S_WRITE_B(spare->boomlijst, spare->MaxTreeSize*(LONG)sizeof(COMPTREE));
02647         }
02648         S_WRITE_B(spare->buffers, spare->bufferssize*(LONG)sizeof(WORD));
02649     }
02650 }
02651 }
02652
02653 ANNOUNCE(AC.ExpressionList)
02654 S_WRITE_LIST(AC.ExpressionList);
02655 for ( i=0; i<AC.ExpressionList.num; ++i ) {
02656     EXPRESSIONS ex = Expressions + i;
02657     if ( ex->renum ) {
02658         S_WRITE_B(ex->renum, sizeof(struct ReNuMbEr));
02659         /* there is one dynamically allocated buffer for struct ReNuMbEr and
02660          * symb.lo points to its beginning. the size of the buffer is not
02661          * stored anywhere but we know it is 2*sizeof(WORD)*N, where N is
02662          * the number of all vectors, indices, functions and symbols. since
02663          * funum points into the buffer at a distance 2N-[Number of
02664          * functions] from symb.lo (see GetTable() in store.c), we can
02665          * calculate the buffer size by some pointer arithmetic. the size is
02666          * then written to the file. */
02667         l = ex->renum->funnum - ex->renum->symb.lo;
02668         l += ex->renum->funnum - ex->renum->func.lo;
02669         S_WRITE_B(&l, sizeof(size_t));
02670         S_WRITE_B(ex->renum->symb.lo, l);
02671     }
02672     if ( ex->bracketinfo ) {
02673         S_WRITE_B(ex->bracketinfo, sizeof(BRACKETINFO));
02674         S_WRITE_B(ex->bracketinfo->indexbuffer,
02675             ex->bracketinfo->indexbuffersize*sizeof(BRACKETINDEX));
02676         S_WRITE_B(ex->bracketinfo->bracketbuffer,
02677             ex->bracketinfo->bracketbuffersize*sizeof(WORD));
02678     }
02679     if ( ex->newbracketinfo ) {
02680         S_WRITE_B(ex->newbracketinfo, sizeof(BRACKETINFO));
02681         S_WRITE_B(ex->newbracketinfo->indexbuffer,
02682             ex->newbracketinfo->indexbuffersize*sizeof(BRACKETINDEX));
02683         S_WRITE_B(ex->newbracketinfo->bracketbuffer,
02684             ex->newbracketinfo->bracketbuffersize*sizeof(WORD));
02685     }
02686     /* don't need to write ex->renumlists */
02687     if ( ex->inmem ) {
02688         /* size of the inmem buffer has to be determined. we use the fact
02689          * that the end of an expression is marked by a zero. */
02690         w = ex->inmem;
02691         while ( *w++ );
02692         l = w - ex->inmem;
02693         S_WRITE_B(&l, sizeof(size_t));
02694         S_WRITE_B(ex->inmem, l);
02695     }
02696 }
02697
02698 ANNOUNCE(AC.IndexList)
02699 S_WRITE_LIST(AC.IndexList);
02700 S_WRITE_LIST(AC.SetElementList);
02701 S_WRITE_LIST(AC.SetList);
02702 S_WRITE_LIST(AC.SymbolList);
02703 S_WRITE_LIST(AC.VectorList);
02704
02705 ANNOUNCE(AC.TableBaseList)
02706 S_WRITE_LIST(AC.TableBaseList);
02707 for ( i=0; i<AC.TableBaseList.num; ++i ) {

```



```

02704      /* see struct dbase in minos.h */
02705      if ( tablebases[i].iblocks ) {
02706          S_WRITE_B(tablebases[i].iblocks, tablebases[i].info.numberofindexblocks *
sizeof(INDEXBLOCK*));
02707          for ( j=0; j<tablebases[i].info.numberofindexblocks; ++j ) {
02708              if ( tablebases[i].iblocks[j] ) {
02709                  S_WRITE_B(tablebases[i].iblocks[j], sizeof(INDEXBLOCK));
02710              }
02711          }
02712      }
02713      if ( tablebases[i].nblocks ) {
02714          S_WRITE_B(tablebases[i].nblocks, tablebases[i].info.numberofnamesblocks *
sizeof(NAMESBLOCK*));
02715          for ( j=0; j<tablebases[i].info.numberofnamesblocks; ++j ) {
02716              if ( tablebases[i].nblocks[j] ) {
02717                  S_WRITE_B(tablebases[i].nblocks[j], sizeof(NAMESBLOCK));
02718              }
02719          }
02720      }
02721      S_WRITE_S(tablebases[i].name);
02722      S_WRITE_S(tablebases[i].fullname);
02723      S_WRITE_S(tablebases[i].tablenames);
02724  }
02725
02726  ANNOUNCE(AC.cbufList)
02727  S_WRITE_LIST(AC.cbufList);
02728  for ( i=0; i<AC.cbufList.num; ++i ) {
02729      S_WRITE_B(cbuf[i].Buffer, cbuf[i].BufferSize*sizeof(WORD));
02730      /* see inicbufs in comtool.c */
02731      S_WRITE_B(cbuf[i].lhs, cbuf[i].maxlhs*(LONG)sizeof(WORD*));
02732      S_WRITE_B(cbuf[i].rhs, cbuf[i].maxrhs*(LONG)(sizeof(WORD*)+2*sizeof(LONG)+2*sizeof(WORD)));
02733      if ( cbuf[i].boomlijst ) {
02734          S_WRITE_B(cbuf[i].boomlijst, cbuf[i].MaxTreeSize*(LONG)sizeof(COMPTREE));
02735      }
02736  }
02737
02738  S_WRITE_LIST(AC.AutoSymbolList);
02739  S_WRITE_LIST(AC.AutoIndexList);
02740  S_WRITE_LIST(AC.AutoVectorList);
02741  S_WRITE_LIST(AC.AutoFunctionList);
02742
02743  S_WRITE_NAMETREE(AC.autonames);
02744
02745  ANNOUNCE(AC.Streams)
02746  S_WRITE_B(AC.Streams, AC.MaxNumStreams*(LONG)sizeof(STREAM));
02747  for ( i=0; i<AC.NumStreams; ++i ) {
02748      if ( AC.Streams[i].inbuffer ) {
02749          S_WRITE_B(AC.Streams[i].buffer, AC.Streams[i].inbuffer);
02750      }
02751      S_WRITE_S(AC.Streams[i].FoldName);
02752      S_WRITE_S(AC.Streams[i].name);
02753  }
02754
02755  if ( AC.termstack ) {
02756      S_WRITE_B(AC.termstack, AC.maxtermlevel*(LONG)sizeof(LONG));
02757  }
02758
02759  if ( AC.termstortstack ) {
02760      S_WRITE_B(AC.termstortstack, AC.maxtermlevel*(LONG)sizeof(LONG));
02761  }
02762
02763  S_WRITE_B(AC.cmod, AM.MaxTal*4*(LONG)sizeof(UWORD));
02764
02765  if ( AC.IfHeap ) {
02766      S_WRITE_B(AC.IfHeap, (LONG)sizeof(LONG)*(AC.MaxIf+1));
02767      S_WRITE_B(AC.IfCount, (LONG)sizeof(LONG)*(AC.MaxIf+1));
02768  }
02769
02770  l = AC.iStop - AC.iBuffer + 2;
02771  S_WRITE_B(AC.iBuffer, l);
02772
02773  if ( AC.LabelNames ) {
02774      S_WRITE_B(AC.LabelNames, AC.MaxLabels*(LONG)(sizeof(UBYTE*)+sizeof(WORD)));
02775      for ( i=0; i<AC.NumLabels; ++i ) {
02776          S_WRITE_S(AC.LabelNames[i]);
02777      }
02778  }
02779
02780  S_WRITE_B(AC.FixIndices, AM.OffsetIndex*(LONG)sizeof(WORD));
02781
02782  if ( AC.termsumcheck ) {
02783      S_WRITE_B(AC.termsumcheck, AC.maxtermlevel*(LONG)sizeof(WORD));
02784  }
02785
02786  S_WRITE_B(AC.WildcardNames, AC.WildcardBufferSize);
02787
02788  if ( AC.tokens ) {

```

```

02789         l = AC.toptokens - AC.tokens;
02790         if ( l ) {
02791             S_WRITE_B(AC.tokens, l);
02792         }
02793     }
02794
02795     S_WRITE_B(AC.tokenarglevel, AM.MaxParLevel*(LONG)sizeof(WORD));
02796
02797     S_WRITE_S(AC.Fortran90Kind);
02798
02799 #ifdef WITHPTHREADS
02800     if ( AC.inputnumbers ) {
02801         S_WRITE_B(AC.inputnumbers, AC.sizepfirstnum*(LONG) (sizeof(WORD)+sizeof(LONG)));
02802     }
02803 #endif /* ifdef WITHPTHREADS */
02804
02805     if ( AC.IfSumCheck ) {
02806         S_WRITE_B(AC.IfSumCheck, (LONG)sizeof(WORD)*(AC.MaxIf+1));
02807     }
02808     if ( AC.CommuteInSet ) {
02809         S_WRITE_B(AC.CommuteInSet, (LONG)sizeof(WORD)*(AC.SizeCommuteInSet+1));
02810     }
02811
02812     S_WRITE_S(AC.CheckpointRunAfter);
02813     S_WRITE_S(AC.CheckpointRunBefore);
02814
02815     S_WRITE_S(AC.extrasym);
02816
02817     /*# AC :*/
02818     /*# AP :*/
02819
02820     /* we write AP as a whole and then write all additional data step by step. */
02821
02822     ANNOUNCE(AP)
02823     S_WRITE_B(&AP, sizeof(struct P_const));
02824
02825     S_WRITE_LIST(AP.DollarList);
02826     for ( i=0; i<AP.DollarList.num; ++i ) {
02827         DOLLARS d = Dollars + i;
02828         S_WRITE_DOLLAR(Dollars[i]);
02829         if ( d->nfactors > 1 ) {
02830             S_WRITE_B(&(d->factors),sizeof(FACDOLLAR)*d->nfactors);
02831             for ( j = 0; j < d->nfactors; j++ ) {
02832                 if ( d->factors[j].size > 0 ) {
02833                     S_WRITE_B(&(d->factors[i].where),sizeof(WORD)*(d->factors[j].size+1));
02834                 }
02835             }
02836         }
02837     }
02838
02839     S_WRITE_LIST(AP.PreVarList);
02840     for ( i=0; i<AP.PreVarList.num; ++i ) {
02841         /* there is one dynamically allocated buffer in struct pReVar holding
02842          * the strings name, value and several argnames. the size of the buffer
02843          * can be calculated by adding up their string lengths. */
02844         l = strlen((char*)PreVar[i].name) + 1;
02845         if ( PreVar[i].value ) {
02846             l += strlen((char*)(PreVar[i].name+1)) + 1;
02847         }
02848         for ( j=0; j<PreVar[i].nargs; ++j ) {
02849             l += strlen((char*)(PreVar[i].name+1)) + 1;
02850         }
02851         S_WRITE_B(&l, sizeof(size_t));
02852         S_WRITE_B(PreVar[i].name, l);
02853     }
02854
02855     ANNOUNCE(AP.LoopList)
02856     S_WRITE_LIST(AP.LoopList);
02857     for ( i=0; i<AP.LoopList.num; ++i ) {
02858         S_WRITE_B(DoLoops[i].p.buffer, DoLoops[i].p.size);
02859         if ( DoLoops[i].type == ONEEXPRESSION ) {
02860             /* do loops with an expression keep this expression in a dynamically
02861              * allocated buffer in dollarname */
02862             S_WRITE_S(DoLoops[i].dollarname);
02863         }
02864     }
02865
02866     S_WRITE_LIST(AP.ProcList);
02867     for ( i=0; i<AP.ProcList.num; ++i ) {
02868         if ( Procedures[i].p.size ) {
02869             if ( Procedures[i].loadmode != 1 ) {
02870                 S_WRITE_B(Procedures[i].p.buffer, Procedures[i].p.size);
02871             }
02872             else {
02873                 for ( j=0; j<AP.ProcList.num; ++j ) {
02874                     if ( Procedures[i].p.buffer == Procedures[j].p.buffer ) {
02875                         break;

```

```

02876         }
02877     }
02878     if ( j == AP.ProcList.num ) {
02879         MesPrint("Error writing procedures to recovery file!");
02880     }
02881     S_WRITE_B(&j, sizeof(int));
02882 }
02883 }
02884 S_WRITE_S(Procedures[i].name);
02885 }
02886
02887 S_WRITE_B(AP.PreSwitchStrings, (AP.NumPreSwitchStrings+1)*(LONG)sizeof(UBYTE*));
02888 for ( i=1; i<=AP.PreSwitchLevel; ++i ) {
02889     S_WRITE_S(AP.PreSwitchStrings[i]);
02890 }
02891
02892 S_WRITE_B(AP.preStart, AP.pSize);
02893
02894 S_WRITE_S(AP.procedureExtension);
02895 S_WRITE_S(AP.cprocedureExtension);
02896
02897 S_WRITE_B(AP.PreAssignStack, AP.MaxPreAssignLevel*(LONG)sizeof(LONG));
02898 S_WRITE_B(AP.PreIfStack, AP.MaxPreIfLevel*(LONG)sizeof(int));
02899 S_WRITE_B(AP.PreSwitchModes, (AP.NumPreSwitchStrings+1)*(LONG)sizeof(int));
02900 S_WRITE_B(AP.PreTypes, (AP.MaxPreTypes+1)*(LONG)sizeof(int));
02901
02902 /*#] AP :*/
02903 /*#[ AR :*/
02904
02905 ANNOUNCE(AR)
02906 /* to remember which entry in AR.Fscr corresponds to the infile */
02907 l = AR.infile - AR.Fscr;
02908 S_WRITE_B(&l, sizeof(LONG));
02909
02910 /* write the FILEHANDLES */
02911 S_WRITE_B(AR.outfile, sizeof(FILEHANDLE));
02912 l = AR.outfile->POfull - AR.outfile->PObuffer;
02913 if ( l ) {
02914     S_WRITE_B(AR.outfile->PObuffer, l*sizeof(WORD));
02915 }
02916 S_WRITE_B(AR.hidefile, sizeof(FILEHANDLE));
02917 l = AR.hidefile->POfull - AR.hidefile->PObuffer;
02918 if ( l ) {
02919     S_WRITE_B(AR.hidefile->PObuffer, l*sizeof(WORD));
02920 }
02921
02922 S_WRITE_B(&AR.StoreData.Fill, sizeof(POSITION));
02923 if ( ISNOTZEROPOS(AR.StoreData.Fill) ) {
02924     S_WRITE_B(&AR.StoreData, sizeof(FILEDATA));
02925 }
02926
02927 S_WRITE_B(&AR.DefPosition, sizeof(POSITION));
02928
02929 l = TimeCPU(1); l = -l;
02930 S_WRITE_B(&l, sizeof(LONG));
02931
02932 ANNOUNCE(AR.InInBuf)
02933 S_WRITE_B(&AR.InInBuf, sizeof(LONG));
02934 S_WRITE_B(&AR.InHiBuf, sizeof(LONG));
02935
02936 S_WRITE_B(&AR.NoCompress, sizeof(int));
02937 S_WRITE_B(&AR.zipCompress, sizeof(int));
02938
02939 S_WRITE_B(&AR.outtohide, sizeof(int));
02940
02941 S_WRITE_B(&AR.GetFile, sizeof(WORD));
02942 S_WRITE_B(&AR.KeptInHold, sizeof(WORD));
02943 S_WRITE_B(&AR.BraceOn, sizeof(WORD));
02944 S_WRITE_B(&AR.MaxBracket, sizeof(WORD));
02945 S_WRITE_B(&AR.CurDum, sizeof(WORD));
02946 S_WRITE_B(&AR.DeferFlag, sizeof(WORD));
02947 S_WRITE_B(&AR.TePos, sizeof(WORD));
02948 S_WRITE_B(&AR.sLevel, sizeof(WORD));
02949 S_WRITE_B(&AR.Stage4Name, sizeof(WORD));
02950 S_WRITE_B(&AR.GetOneFile, sizeof(WORD));
02951 S_WRITE_B(&AR.PolyFun, sizeof(WORD));
02952 S_WRITE_B(&AR.PolyFunInv, sizeof(WORD));
02953 S_WRITE_B(&AR.PolyFunType, sizeof(WORD));
02954 S_WRITE_B(&AR.PolyFunExp, sizeof(WORD));
02955 S_WRITE_B(&AR.PolyFunVar, sizeof(WORD));
02956 S_WRITE_B(&AR.PolyFunPow, sizeof(WORD));
02957 S_WRITE_B(&AR.Eside, sizeof(WORD));
02958 S_WRITE_B(&AR.MaxDum, sizeof(WORD));
02959 S_WRITE_B(&AR.level, sizeof(WORD));
02960 S_WRITE_B(&AR.expchanged, sizeof(WORD));
02961 S_WRITE_B(&AR.expflags, sizeof(WORD));
02962 S_WRITE_B(&AR.CurExpr, sizeof(WORD));

```

```

02963     S_WRITE_B(&AR.SortType, sizeof(WORD));
02964     S_WRITE_B(&AR.ShortSortCount, sizeof(WORD));
02965
02966 #ifdef WITHPTHREADS
02967     for ( j = 0; j < AM.totalnumberofthreads; j++ ) {
02968         S_WRITE_B(&(AB[j]->R.wranfnpair1), sizeof(int));
02969         S_WRITE_B(&(AB[j]->R.wranfnpair2), sizeof(int));
02970         S_WRITE_B(&(AB[j]->R.wranfcall), sizeof(int));
02971         S_WRITE_B(&(AB[j]->R.wranfseed), sizeof(ULONG));
02972         S_WRITE_B(&(AB[j]->R.wranfia), sizeof(ULONG *));
02973         if ( AB[j]->R.wranfia ) {
02974             S_WRITE_B(AB[j]->R.wranfia, sizeof(ULONG)*AB[j]->R.wranfnpair2);
02975         }
02976     }
02977 #else
02978     S_WRITE_B(&(AR.wranfnpair1), sizeof(int));
02979     S_WRITE_B(&(AR.wranfnpair2), sizeof(int));
02980     S_WRITE_B(&(AR.wranfcall), sizeof(int));
02981     S_WRITE_B(&(AR.wranfseed), sizeof(ULONG));
02982     S_WRITE_B(&(AR.wranfia), sizeof(ULONG *));
02983     if ( AR.wranfia ) {
02984         S_WRITE_B(AR.wranfia, sizeof(ULONG)*AR.wranfnpair2);
02985     }
02986 #endif
02987
02988     /*#] AR :*/
02989     /*#[ AO :*/
02990     /*
02991     We copy all non-pointer variables.
02992     */
02993     ANNOUNCE(AO)
02994     l = sizeof(A.O) - ((UBYTE *)(&(A.O.NumInBrack)) - (UBYTE *)(&(A.O)));
02995     S_WRITE_B(&(A.O.NumInBrack), l);
02996     /*
02997     Now the variables in OptimizeResult
02998     */
02999     S_WRITE_B(&(A.O.OptimizeResult), sizeof(OPTIMIZERESULT));
03000     if ( A.O.OptimizeResult.codesize > 0 ) {
03001         S_WRITE_B(A.O.OptimizeResult.code, A.O.OptimizeResult.codesize*sizeof(WORD));
03002     }
03003     S_WRITE_S(A.O.OptimizeResult.nameofexpr);
03004     /*
03005     And now the dictionaries.
03006     We write each dictionary to a buffer and get the size of that buffer.
03007     Then we write the size and the buffer.
03008     */
03009     for ( i = 0; i < AO.NumDictionaries; i++ ) {
03010         l = DictToBytes(AO.Dictionaries[i], (UBYTE *) (AT.WorkPointer));
03011         S_WRITE_B(&l, sizeof(LONG));
03012         S_WRITE_B(AT.WorkPointer, l);
03013     }
03014
03015     /*#] AO :*/
03016     /*#[ PF :*/
03017 #ifdef WITHMPI
03018     S_WRITE_B(&PF.numtasks, sizeof(int));
03019     S_WRITE_B(&PF.rhsInParallel, sizeof(int));
03020     S_WRITE_B(&PF.exprbufsize, sizeof(int));
03021     S_WRITE_B(&PF.log, sizeof(int));
03022 #endif
03023     /*#] PF :*/
03024
03025 #ifdef WITHPTHREADS
03026
03027     ANNOUNCE(GetTimerInfo)
03028     /*
03029     write timing information of individual threads
03030     */
03031     i = GetTimerInfo(&longp, &longpp);
03032     S_WRITE_B(&i, sizeof(int));
03033     S_WRITE_B(longp, i*(LONG)sizeof(LONG));
03034     S_WRITE_B(&l, sizeof(int));
03035     S_WRITE_B(longpp, i*(LONG)sizeof(LONG));
03036
03037 #endif
03038
03039     S_FLUSH_B /* because we will call fwrite() directly in the following code */
03040
03041     /* save length of data at the beginning of the file */
03042     ANNOUNCE(file length)
03043     SETBASEPOSITION(pos, (ftell(fd)));
03044     fseek(fd, 0, SEEK_SET);
03045     if ( fwrite(&pos, 1, sizeof(POSITION), fd) != sizeof(POSITION) ) return(__LINE__);
03046     fseek(fd, BASEPOSITION(pos), SEEK_SET);
03047
03048     ANNOUNCE(file close)
03049     if ( fclose(fd) ) return(__LINE__);

```

```

03050 #ifdef WITHMPI
03051     if ( PF.me == MASTER ) {
03052 #endif
03053 /*
03054     copy store file if necessary
03055 */
03056     ANNOUNCE(copy store file)
03057     if ( ISNOTZEROPOS(AR.StoreData.Fill) ) {
03058         if ( CopyFile(FG.fname, storefile) ) return(__LINE__);
03059     }
03060 /*
03061     copy sort file if necessary
03062 */
03063     ANNOUNCE(copy sort file)
03064     if ( AR.outfile->handle >= 0 ) {
03065         if ( CopyFile(AR.outfile->name, sortfile) ) return(__LINE__);
03066     }
03067 /*
03068     copy hide file if necessary
03069 */
03070     ANNOUNCE(copy hide file)
03071     if ( AR.hidefile->handle >= 0 ) {
03072         if ( CopyFile(AR.hidefile->name, hidefile) ) return(__LINE__);
03073     }
03074 #ifdef WITHMPI
03075     }
03076 /*
03077     * For ParFORM, the renaming will be performed after the master got
03078     * all recovery files from the slaves.
03079     */
03080 #else
03081 /*
03082     make the intermediate file the recovery file
03083 */
03084     ANNOUNCE(rename intermediate file)
03085     if ( rename(intermedfile, recoveryfile) ) return(__LINE__);
03086
03087     done_snapshot = 1;
03088
03089     MesPrint("done."); fflush(0);
03090 #endif
03091
03092 #ifdef PRINTDEBUG
03093     print_M();
03094     print_C();
03095     print_P();
03096     print_R();
03097 #endif
03098
03099     return(0);
03100 }
03101
03102 /*
03103     #] DoSnapshot :
03104     #[ DoCheckpoint :
03105 */
03106
03111 void DoCheckpoint(int moduletype)
03112 {
03113     int error;
03114     LONG timestamp = TimeWallClock(1);
03115 #ifdef WITHMPI
03116     if (PF.me == MASTER){
03117 #endif
03118         if ( timestamp - AC.CheckpointStamp >= AC.CheckpointInterval ) {
03119             char argbuf[20];
03120             int retvalue = 0;
03121             if ( AC.CheckpointRunBefore ) {
03122                 size_t l1, l2;
03123                 char *str;
03124                 l1 = strlen(AC.CheckpointRunBefore);
03125                 NumToStr((UBYTE*)argbuf, AC.CModule);
03126                 l2 = strlen(argbuf);
03127                 str = (char*)Malloc1(l1+l2+2, "callbefore");
03128                 strcpy(str, AC.CheckpointRunBefore);
03129                 *(str+l1) = ' ';
03130                 strcpy(str+l1+1, argbuf);
03131                 retvalue = system(str);
03132                 M_free(str, "callbefore");
03133                 if ( retvalue ) {
03134                     MesPrint("Script returned error -> no recovery file will be created.");
03135                 }
03136             }
03137 #ifdef WITHMPI
03138             /* Confirm slaves to make snapshots. */
03139             PF_BroadcastNumber(retvalue == 0);
03140 #endif
03141         }
03142 #endif

```

```

03141         if ( retvalue == 0 ) {
03142             if ( (error = DoSnapshot(moduletype)) ) {
03143                 MesPrint("Error creating recovery files: %d", error);
03144             }
03145 #ifdef WITHMPI
03146         {
03147             int i;
03148             /*get recovery files from slaves:*/
03149             for(i=1; i<PF.numtasks;i++){
03150                 FILE *fd;
03151                 const char *tmpnam = PF_recoveryfile('m', i, 1);
03152                 fd = fopen(tmpnam, "w");
03153                 if(fd == NULL){
03154                     MesPrint("Error opening recovery file for slave %d",i);
03155                     Terminate(-1);
03156                 }/*if(fd == NULL)*/
03157                 retvalue=PF_RecvFile(i,fd);
03158                 if(retvalue<=0){
03159                     MesPrint("Error receiving recovery file from slave %d",i);
03160                     Terminate(-1);
03161                 }/*if(retvalue<=0)*/
03162                 fclose(fd);
03163             }/*for(i=0; i<PF.numtasks;i++)*/
03164             /*
03165              * Make the intermediate files the recovery files.
03166              */
03167             ANNOUNCE(rename intermediate file)
03168             for ( i = 0; i < PF.numtasks; i++ ) {
03169                 const char *src = PF_recoveryfile('m', i, 1);
03170                 const char *dst = PF_recoveryfile('m', i, 0);
03171                 if ( rename(src, dst) ) {
03172                     MesPrint("Error renaming recovery file %s -> %s", src, dst);
03173                 }
03174             }
03175             done_snapshot = 1;
03176             MesPrint("done."); fflush(0);
03177         }
03178 #endif
03179     }
03180     if ( AC.CheckpointRunAfter ) {
03181         size_t l1, l2;
03182         char *str;
03183         l1 = strlen(AC.CheckpointRunAfter);
03184         NumToStr((UBYTE*)argbuf, AC.CModule);
03185         l2 = strlen(argbuf);
03186         str = (char*)Malloc1(l1+l2+2, "callafter");
03187         strcpy(str, AC.CheckpointRunAfter);
03188         *(str+l1) = ' ';
03189         strcpy(str+l1+1, argbuf);
03190         retvalue = system(str);
03191         M_free(str, "callafter");
03192         if ( retvalue ) {
03193             MesPrint("Error calling script after recovery.");
03194         }
03195     }
03196     AC.CheckpointStamp = TimeWallClock(1);
03197 }
03198 #ifdef WITHMPI
03199 else/* timestamp - AC.CheckpointStamp < AC.CheckpointInterval*/
03200 /* The slaves don't need to make snapshots. */
03201 PF_BroadcastNumber(0);
03202 }
03203 }/*if(PF.me == MASTER)*/
03204 else{/*Slave*/
03205     int i;
03206     /* Check if the slave needs to make a snapshot. */
03207     if ( PF_BroadcastNumber(0) ) {
03208         error = DoSnapshot(moduletype);
03209         if(error == 0){
03210             FILE *fd;
03211             /*
03212              * Send the recovery file to the master. Note that no renaming
03213              * has been performed and what we have to send is actually sitting
03214              * in the intermediate file.
03215              */
03216             fd = fopen(intermedfile, "r");
03217             i=PF_SendFile(MASTER, fd);/*if fd=NULL, PF_SendFile seds to a slave the failure tag*/
03218             if(fd == NULL)
03219                 Terminate(-1);
03220             fclose(fd);
03221             if(i<=0)
03222                 Terminate(-1);
03223             /*Now the slave need not the recovery file so remove it:*/
03224             remove(intermedfile);
03225         }
03226         else{
03227             /*send the error tag to the master:*/

```

```


03228         PF_SendFile(MASTER, NULL); /*if fd==NULL, PF_SendFile seds to a slave the failure tag*/
03229         Terminate(-1);
03230     }
03231     done_snapshot = 1;
03232     } /*if (tag=PF_DATA_MSGTAG) */
03233     } /*if (PF.me != MASTER) */
03234 #endif
03235 }
03236
03237 /*
03238     #] DoCheckpoint :
03239 */

```

4.7 comexpr.c File Reference

```
#include "form3.h"
```

Include dependency graph for comexpr.c:

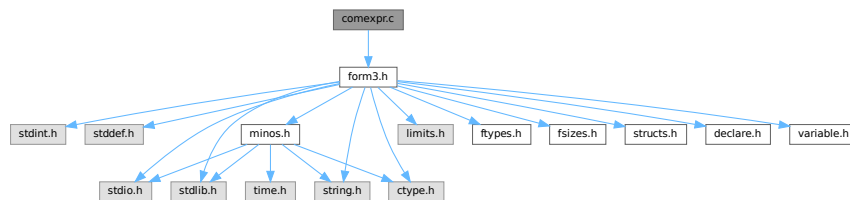

Data Structures

- struct **id_options**

Functions

- int **CoLocal** (UBYTE *inp)
- int **CoGlobal** (UBYTE *inp)
- int **CoLocalFactorized** (UBYTE *inp)
- int **CoGlobalFactorized** (UBYTE *inp)
- int **DoExpr** (UBYTE *inp, int type, int par)
- int **ColdOld** (UBYTE *inp)
- int **Cold** (UBYTE *inp)
- int **ColdNew** (UBYTE *inp)
- int **CoDisorder** (UBYTE *inp)
- int **CoMany** (UBYTE *inp)
- int **CoMulti** (UBYTE *inp)
- int **ColfMatch** (UBYTE *inp)
- int **ColfNoMatch** (UBYTE *inp)
- int **CoOnce** (UBYTE *inp)
- int **CoOnly** (UBYTE *inp)
- int **CoSelect** (UBYTE *inp)
- int **ColdExpression** (UBYTE *inp, int type)
- int **CoMultiply** (UBYTE *inp)
- int **CoFill** (UBYTE *inp)
- int **CoFillExpression** (UBYTE *inp)
- int **CoPrintTable** (UBYTE *inp)
- int **CoAssign** (UBYTE *inp)
- int **CoDeallocateTable** (UBYTE *inp)

4.7.1 Detailed Description

Compiler routines for statements that involve algebraic expressions. These involve definitions, id-statements, the multiply statement and the fill statement.

Definition in file [comexpr.c](#).

4.7.2 Function Documentation

4.7.2.1 CoLocal()

```
int CoLocal (
    UBYTE * inp )
```

Definition at line 66 of file [comexpr.c](#).

4.7.2.2 CoGlobal()

```
int CoGlobal (
    UBYTE * inp )
```

Definition at line 73 of file [comexpr.c](#).

4.7.2.3 CoLocalFactorized()

```
int CoLocalFactorized (
    UBYTE * inp )
```

Definition at line 80 of file [comexpr.c](#).

4.7.2.4 CoGlobalFactorized()

```
int CoGlobalFactorized (
    UBYTE * inp )
```

Definition at line 87 of file [comexpr.c](#).

4.7.2.5 DoExpr()

```
int DoExpr (
    UBYTE * inp,
    int type,
    int par )
```

Definition at line 96 of file [comexpr.c](#).

4.7.2.6 ColdOld()

```
int ColdOld (
    UBYTE * inp )
```

Definition at line 384 of file [comexpr.c](#).

4.7.2.7 Cold()

```
int Cold (
    UBYTE * inp )
```

Definition at line 395 of file [comexpr.c](#).

4.7.2.8 ColdNew()

```
int ColdNew (
    UBYTE * inp )
```

Definition at line 406 of file [comexpr.c](#).

4.7.2.9 CoDisorder()

```
int CoDisorder (
    UBYTE * inp )
```

Definition at line 417 of file [comexpr.c](#).

4.7.2.10 CoMany()

```
int CoMany (
    UBYTE * inp )
```

Definition at line 428 of file [comexpr.c](#).

4.7.2.11 CoMulti()

```
int CoMulti (
    UBYTE * inp )
```

Definition at line 439 of file [comexpr.c](#).

4.7.2.12 ColfMatch()

```
int ColfMatch (
    UBYTE * inp )
```

Definition at line 450 of file [comexpr.c](#).

4.7.2.13 ColfNoMatch()

```
int ColfNoMatch (
    UBYTE * inp )
```

Definition at line 461 of file [comexpr.c](#).

4.7.2.14 CoOnce()

```
int CoOnce (
    UBYTE * inp )
```

Definition at line 472 of file [comexpr.c](#).

4.7.2.15 CoOnly()

```
int CoOnly (
    UBYTE * inp )
```

Definition at line 483 of file [comexpr.c](#).

4.7.2.16 CoSelect()

```
int CoSelect (
    UBYTE * inp )
```

Definition at line 494 of file [comexpr.c](#).

4.7.2.17 ColdExpression()

```
int ColdExpression (
    UBYTE * inp,
    int type )
```

Definition at line 507 of file [comexpr.c](#).

4.7.2.18 CoMultiply()

```
int CoMultiply (
    UBYTE * inp )
```

Definition at line 1031 of file [comexpr.c](#).

4.7.2.19 CoFill()

```
int CoFill (
    UBYTE * inp )
```

Definition at line 1070 of file [comexpr.c](#).

4.7.2.20 CoFillExpression()

```
int CoFillExpression (
    UBYTE * inp )
```

Definition at line 1356 of file [comexpr.c](#).

4.7.2.21 CoPrintTable()

```
int CoPrintTable (
    UBYTE * inp )
```

Definition at line 1748 of file [comexpr.c](#).

4.7.2.22 CoAssign()

```
int CoAssign (
    UBYTE * inp )
```

Definition at line 1924 of file [comexpr.c](#).

4.7.2.23 CoDeallocateTable()

```
int CoDeallocateTable (
    UBYTE * inp )
```

Definition at line 1982 of file [comexpr.c](#).

4.8 comexpr.c

[Go to the documentation of this file.](#)

```
00001
00008 /* # [ License : */
00009 /*
00010 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 * When using this file you are requested to refer to the publication
00012 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 * This is considered a matter of courtesy as the development was paid
00014 * for by FOM the Dutch physics granting agency and we would like to
00015 * be able to track its scientific use to convince FOM of its value
00016 * for the community.
00017 *
00018 * This file is part of FORM.
00019 *
00020 * FORM is free software: you can redistribute it and/or modify it under the
00021 * terms of the GNU General Public License as published by the Free Software
00022 * Foundation, either version 3 of the License, or (at your option) any later
00023 * version.
00024 *
00025 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 * details.
00029 *
00030 * You should have received a copy of the GNU General Public License along
00031 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* # ] License : */
00034
00035 /*
```

```

00036     #[ Includes : compi2.c
00037
00038     File contains most of what has to do with compiling expressions.
00039     Main supporting file: token.c
00040 */
00041
00042 #include "form3.h"
00043
00044 static struct id_options {
00045     UBYTE *name;
00046     int code;
00047     int dummy;
00048 } IdOptions[] = {
00049     {(UBYTE *) "multi",      SUBMULTI      ,0},
00050     {(UBYTE *) "many",      SUBMANY       ,0},
00051     {(UBYTE *) "only",      SUBONLY       ,0},
00052     {(UBYTE *) "once",      SUBONCE       ,0},
00053     {(UBYTE *) "ifmatch",   SUBAFTER      ,0},
00054     {(UBYTE *) "ifnomatch", SUBAFTERNOT  ,0},
00055     {(UBYTE *) "ifnotmatch", SUBAFTERNOT  ,0},
00056     {(UBYTE *) "disorder",  SUBDISORDER  ,0},
00057     {(UBYTE *) "select",    SUBSELECT     ,0},
00058     {(UBYTE *) "all",       SUBALL        ,0},
00059 };
00060
00061 /*
00062     #] Includes :
00063     #[ CoLocal :
00064 */
00065
00066 int CoLocal(UBYTE *inp) { return(DoExpr(inp, LOCALEXPRESSION, 0)); }
00067
00068 /*
00069     #] CoLocal :
00070     #[ CoGlobal :
00071 */
00072
00073 int CoGlobal(UBYTE *inp) { return(DoExpr(inp, GLOBALEXPRESSION, 0)); }
00074
00075 /*
00076     #] CoGlobal :
00077     #[ CoLocalFactorized :
00078 */
00079
00080 int CoLocalFactorized(UBYTE *inp) { return(DoExpr(inp, LOCALEXPRESSION, 1)); }
00081
00082 /*
00083     #] CoLocalFactorized :
00084     #[ CoGlobalFactorized :
00085 */
00086
00087 int CoGlobalFactorized(UBYTE *inp) { return(DoExpr(inp, GLOBALEXPRESSION, 1)); }
00088
00089 /*
00090     #] CoGlobalFactorized :
00091     #[ DoExpr:
00092
00093
00094 */
00095
00096 int DoExpr(UBYTE *inp, int type, int par)
00097 {
00098     GETIDENTITY
00099     int error = 0;
00100     UBYTE *p, *q, c;
00101     WORD *w, i, j = 0, c1, c2, *OldWork = AT.WorkPointer, osize;
00102     WORD jold = 0;
00103     POSITION pos;
00104     while ( *inp == ',' ) inp++;
00105     if ( par ) AC.ToBeInFactors = 1;
00106     else AC.ToBeInFactors = 0;
00107     p = inp;
00108     while ( *p && *p != '=' ) {
00109         if ( *p == '(' ) SKIPBRA4(p)
00110         else if ( *p == '{' ) SKIPBRA5(p)
00111         else if ( *p == '[' ) SKIPBRA1(p)
00112         else p++;
00113     }
00114     if ( *p ) { /* Variety with the = sign */
00115         if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00116             MesPrint("%Illegal name for expression");
00117             error = 1;
00118             if ( q[-1] == '_' ) {
00119                 while ( FG.cTable[*q] < 2 || *q == '_' ) q++;
00120             }
00121         }
00122         else {

```

```

00123     c = *q; *q = 0;
00124     if ( GetVar(inp,&c1,&c2,ALLVARIABLES,NOAUTO) != NAMENOTFOUND ) {
00125         if ( c1 == CEXPRESSION ) {
00126             if ( Expressions[c2].status == STOREDEXPRESSION ) {
00127                 MesPrint("&Illegal attempt to overwrite a stored expression");
00128                 error = 1;
00129             }
00130             else {
00131                 HighWarning("Expression is replaced by new definition");
00132                 if ( AO.OptimizeResult.nameofexpr != NULL &&
00133                     StrCmp(inp,AO.OptimizeResult.nameofexpr) == 0 ) {
00134                     ClearOptimize();
00135                 }
00136                 if ( Expressions[c2].status != DROPEDEXPRESSION ) {
00137                     w = &(Expressions[c2].status);
00138                     if ( *w == LOCALEXPRESSION || *w == SKIPLEXPRESSION )
00139                         *w = DROPEDEXPRESSION;
00140                     else if ( *w == GLOBALEXPRESSION || *w == SKIPGEXPRESSION )
00141                         *w = DROPGEXPRESSION;
00142                     else if ( *w == HIDDENLEXPRESSION )
00143                         *w = DROPHLEXPRESSION;
00144                     else if ( *w == HIDDENGEXPRESSION )
00145                         *w = DROPHGEXPRESSION;
00146                 }
00147                 AC.TransEname = Expressions[c2].name;
00148                 j = EntVar(CEXPRESSION,0,type,0,0,0);
00149                 Expressions[j].node = Expressions[c2].node;
00150                 Expressions[c2].replace = j;
00151             }
00152         }
00153         else {
00154             MesPrint("&name of expression is also name of a variable");
00155             error = 1;
00156             j = EntVar(CEXPRESSION,inp,type,0,0,0);
00157         }
00158         jold = c2;
00159     }
00160     else {
00161         /*
00162             Here we have to worry about reuse of the expression in the
00163             same module. That will need AS.Oldvflags but that may not
00164             be defined or have the proper value.
00165         */
00166         j = EntVar(CEXPRESSION,inp,type,0,0,0);
00167         jold = j;
00168     }
00169     *q = c;
00170     OldWork = w = AT.WorkPointer;
00171     *w++ = TYPEEXPRESSION;
00172     *w++ = 3+SUBEXPSIZE;
00173     *w++ = j;
00174     AC.ProtoType = w;
00175     AR.CurExpr = j; /* Block expression j */
00176     *w++ = SUBEXPRESSION;
00177     *w++ = SUBEXPSIZE;
00178     *w++ = j;
00179     *w++ = 1;
00180     *w++ = AC.cbunum;
00181     FILLSUB(w)
00182
00183     if ( c == '(' ) {
00184         while ( *q == ',' || *q == '(' ) {
00185             inp = q+1;
00186             if ( ( q = SkipAName(inp) ) == 0 ) {
00187                 MesPrint("&Illegal name for expression argument");
00188                 error = 1;
00189                 q = p - 1;
00190                 break;
00191             }
00192             c = *q; *q = 0;
00193             if ( GetVar(inp,&c1,&c2,ALLVARIABLES,WITHAUTO) < 0 ) c1 = -1;
00194             switch ( c1 ) {
00195                 case CSYMBOL :
00196                     *w++ = SYMTOSYM; *w++ = 4; *w++ = c2; *w++ = 0;
00197                     break;
00198                 case CINDEX :
00199                     *w++ = INDTOIND; *w++ = 4;
00200                     *w++ = c2 + AM.OffsetIndex; *w++ = 0;
00201                     break;
00202                 case CVECTOR :
00203                     *w++ = VECTOVEC; *w++ = 4;
00204                     *w++ = c2 + AM.OffsetVector; *w++ = 0;
00205                     break;
00206                 case CFUNCTION :
00207                     *w++ = FUNTOFUN; *w++ = 4; *w++ = c2 + FUNCTION; *w++ = 0;
00208                     break;
00209                 default :

```

```

00210             MesPrint("&Illegal expression parameter: %s",inp);
00211             error = 1;
00212             break;
00213         }
00214         *q = c;
00215     }
00216     if ( *q != ')' || q+1 != p ) {
00217         MesPrint("&Illegal use of arguments for expression");
00218         error = 1;
00219     }
00220     AC.ProtoType[1] = w - AC.ProtoType;
00221 }
00222 else if ( c != '=' ) {
00223 /*
00224     The dummy accepted L F := RHS;
00225 */
00226     MesPrint("&Illegal LHS for expression definition");
00227     error = 1;
00228 }
00229 *w++ = 1;
00230 *w++ = 1;
00231 *w++ = 3;
00232 *w++ = 0;
00233 SeekScratch(AR.outfile,&pos);
00234 Expressions[j].counter = 1;
00235 Expressions[j].onfile = pos;
00236 Expressions[j].whichbuffer = 0;
00237 #ifdef PARALLELCODE
00238     Expressions[j].partodo = AC.inparallelfalg;
00239 #endif
00240 OldWork[2] = w - OldWork - 3;
00241 AT.WorkPointer = w;
00242 /*
00243     Writing the expression prototype to disk and to the compiler
00244     buffer is done only after the RHS has been compiled because
00245     we don't know the number of the main level RHS yet.
00246 */
00247 }
00248 inp = p+1;
00249 ClearWildcardNames();
00250 osize = AC.ProtoType[1]; AC.ProtoType[1] = SUBEXPSIZE;
00251 PutInVflags(jold);
00252 if ( ( i = CompileAlgebra(inp,RHSIDE,AC.ProtoType) ) < 0 ) {
00253     AC.ProtoType[1] = osize;
00254     error = 1;
00255 }
00256 else if ( error == 0 ) {
00257     AC.ProtoType[1] = osize;
00258     AC.ProtoType[2] = i;
00259     if ( PutOut(BHEAD OldWork+2,&pos,AR.outfile,0) < 0 ) {
00260         MesPrint("&Cannot create expression");
00261         error = -1;
00262     }
00263     else {
00264         Expressions[j].sizeprototype = OldWork[2];
00265         OldWork[2] = 4+SUBEXPSIZE;
00266         OldWork[4] = SUBEXPSIZE;
00267         OldWork[5] = i;
00268         OldWork[SUBEXPSIZE+3] = 1;
00269         OldWork[SUBEXPSIZE+4] = 1;
00270         OldWork[SUBEXPSIZE+5] = 3;
00271         OldWork[SUBEXPSIZE+6] = 0;
00272         if ( PutOut(BHEAD OldWork+2,&pos,AR.outfile,0) < 0 ) {
00273             || FlushOut(&pos,AR.outfile,0) ) {
00274                 MesPrint("&Cannot create expression");
00275                 error = -1;
00276             }
00277             AR.outfile->POfull = AR.outfile->POfill;
00278         }
00279         OldWork[2] = j;
00280 /*
00281     Seems unnecessary (13-feb-2018)
00282
00283     AddNtoL(OldWork[1],OldWork);
00284 */
00285     AT.WorkPointer = OldWork;
00286     if ( AC.dumnumflag ) Add2Com(TYPEDETCURDUM)
00287 }
00288 AC.ToBeInFactors = 0;
00289 }
00290 else { /* Variety in which expressions change property */
00291 /*
00292     This code got a major revision because it didn't
00293     take hidden expressions into account. (1-jun-2010 JV)
00294 */
00295     do {
00296         if ( ( q = SkipAName(inp) ) == 0 ) {

```

```

00297         MesPrint("&Illegal name(s) for expression(s)");
00298         return(1);
00299     }
00300     c = *q; *q = 0;
00301     if ( GetName(AC.exprnames,inp,&c2,NOAUTO) == NAMENOTFOUND ) {
00302         MesPrint("&%s is not a valid expression",inp);
00303         error = 1;
00304     }
00305     else {
00306         w = &(Expressions[c2].status);
00307         if ( type == LOCALEXPRESSION ) {
00308             switch ( *w ) {
00309                 case GLOBALEXPRESSION:
00310                     *w = LOCALEXPRESSION;
00311                     break;
00312                 case SKIPGEXPRESSION:
00313                     *w = SKIPLEXPRESSION;
00314                     break;
00315                 case DROPGEXPRESSION:
00316                     *w = DROPLEXPRESSION;
00317                     break;
00318                 case HIDDENGEXPRESSION:
00319                     *w = HIDDENLEXPRESSION;
00320                     break;
00321                 case HIDEGEXPRESSION:
00322                     *w = HIDELEXPRESSION;
00323                     break;
00324                 case UNHIDEGEXPRESSION:
00325                     *w = UNHIDELEXPRESSION;
00326                     break;
00327                 case INTOHIDEGEXPRESSION:
00328                     *w = INTOHIDELEXPRESSION;
00329                     break;
00330                 case DROPHGEXPRESSION:
00331                     *w = DROPHLEXPRESSION;
00332                     break;
00333             }
00334         }
00335         else if ( type == GLOBALEXPRESSION ) {
00336             switch ( *w ) {
00337                 case LOCALEXPRESSION:
00338                     *w = GLOBALEXPRESSION;
00339                     break;
00340                 case SKIPLEXPRESSION:
00341                     *w = SKIPGEXPRESSION;
00342                     break;
00343                 case DROPLEXPRESSION:
00344                     *w = DROPGEXPRESSION;
00345                     break;
00346                 case HIDDENLEXPRESSION:
00347                     *w = HIDDENGEXPRESSION;
00348                     break;
00349                 case HIDELEXPRESSION:
00350                     *w = HIDEGEXPRESSION;
00351                     break;
00352                 case UNHIDELEXPRESSION:
00353                     *w = UNHIDEGEXPRESSION;
00354                     break;
00355                 case INTOHIDELEXPRESSION:
00356                     *w = INTOHIDEGEXPRESSION;
00357                     break;
00358                 case DROPHLEXPRESSION:
00359                     *w = DROPHGEXPRESSION;
00360                     break;
00361             }
00362         }
00363         /*
00364             old code
00365             if ( type != LOCALEXPRESSION || *w != STOREDEXPRESSION )
00366                 *w = type;
00367         */
00368     }
00369     *q = c; inp = q+1;
00370 } while ( c == ',' );
00371 if ( c ) {
00372     MesPrint("&Illegal object in local or global redefinition");
00373     error = 1;
00374 }
00375 }
00376 return(error);
00377 }
00378
00379 /*
00380 #] DoExpr:
00381 #[ CoIdOld :
00382 */
00383

```

```
00384 int CoIdOld(UBYTE *inp)
00385 {
00386     AC.idoption = 0;
00387     return(CoIdExpression(inp, TYPEIDOLD));
00388 }
00389
00390 /*
00391     #] CoIdOld :
00392     #[ CoId :
00393 */
00394
00395 int CoId(UBYTE *inp)
00396 {
00397     AC.idoption = 0;
00398     return(CoIdExpression(inp, TYPEIDNEW));
00399 }
00400
00401 /*
00402     #] CoId :
00403     #[ CoIdNew :
00404 */
00405
00406 int CoIdNew(UBYTE *inp)
00407 {
00408     AC.idoption = 0;
00409     return(CoIdExpression(inp, TYPEIDNEW));
00410 }
00411
00412 /*
00413     #] CoIdNew :
00414     #[ CoDisorder :
00415 */
00416
00417 int CoDisorder(UBYTE *inp)
00418 {
00419     AC.idoption = SUBDISORDER;
00420     return(CoIdExpression(inp, TYPEIDNEW));
00421 }
00422
00423 /*
00424     #] CoDisorder :
00425     #[ CoMany :
00426 */
00427
00428 int CoMany(UBYTE *inp)
00429 {
00430     AC.idoption = SUBMANY;
00431     return(CoIdExpression(inp, TYPEIDNEW));
00432 }
00433
00434 /*
00435     #] CoMany :
00436     #[ CoMulti :
00437 */
00438
00439 int CoMulti(UBYTE *inp)
00440 {
00441     AC.idoption = SUBMULTI;
00442     return(CoIdExpression(inp, TYPEIDNEW));
00443 }
00444
00445 /*
00446     #] CoMulti :
00447     #[ CoIfMatch :
00448 */
00449
00450 int CoIfMatch(UBYTE *inp)
00451 {
00452     AC.idoption = SUBAFTER;
00453     return(CoIdExpression(inp, TYPEIDNEW));
00454 }
00455
00456 /*
00457     #] CoIfMatch :
00458     #[ CoIfNoMatch :
00459 */
00460
00461 int CoIfNoMatch(UBYTE *inp)
00462 {
00463     AC.idoption = SUBAFTERNOT;
00464     return(CoIdExpression(inp, TYPEIDNEW));
00465 }
00466
00467 /*
00468     #] CoIfNoMatch :
00469     #[ CoOnce :
00470 */
```



```

00471
00472 int CoOnce(UBYTE *inp)
00473 {
00474     AC.idoption = SUBONCE;
00475     return(CoIdExpression(inp,TYPEIDNEW));
00476 }
00477
00478 /*
00479     #] CoOnce :
00480     #[ CoOnly :
00481 */
00482
00483 int CoOnly(UBYTE *inp)
00484 {
00485     AC.idoption = SUBONLY;
00486     return(CoIdExpression(inp,TYPEIDNEW));
00487 }
00488
00489 /*
00490     #] CoOnly :
00491     #[ CoSelect :
00492 */
00493
00494 int CoSelect(UBYTE *inp)
00495 {
00496     AC.idoption = SUBSELECT;
00497     return(CoIdExpression(inp,TYPEIDNEW));
00498 }
00499
00500 /*
00501     #] CoSelect :
00502     #[ CoIdExpression :
00503
00504     First finish dealing with secondary keywords
00505 */
00506
00507 int CoIdExpression(UBYTE *inp, int type)
00508 {
00509     GETIDENTITY
00510     int i, j, idhead, error = 0, MinusSign = 0, opt, retcode;
00511     WORD *w, *s, *m, *mm, *ww, *FirstWork, *OldWork, cl, numsets = 0,
00512         oldnumrhs, *ow, oldEside;
00513     UBYTE *p, *pp, c;
00514     CBUF *C = cbuf+AC.cbufnum;
00515     LONG oldcpointer, x;
00516     FirstWork = OldWork = AT.WorkPointer;
00517 /*
00518     Don't forget to change in StudyPattern if we change/add_to the
00519     following setup.
00520     if ( type == TYPEIF ) idhead = IDHEAD-1;
00521     else
00522 */
00523     idhead = IDHEAD;
00524     AR.CurExpr = -1;
00525     w = AT.WorkPointer;
00526     *w++ = type;
00527     *w++ = idhead + SUBEXPSIZE;
00528     w++;
00529     if ( idhead >= IDHEAD ) *w++ = -1;
00530 #if IDHEAD > 4
00531     for ( i = 4; i < idhead; i++ ) *w++ = 0;
00532 #endif
00533     while ( *inp == ',' ) inp++;
00534     p = inp;
00535     if ( AC.idoption == SUBSELECT ) {
00536         p--;
00537         goto findsets;
00538     }
00539     else if ( ( AC.idoption == SUBAFTER ) || ( AC.idoption == SUBAFTERNOT ) ) {
00540         while ( *p && *p != '=' && *p != ',' ) {
00541             if ( *p == '(' ) SKIPBRA4(p)
00542             else if ( *p == '{' ) SKIPBRA5(p)
00543             else if ( *p == '[' ) SKIPBRA1(p)
00544             else p++;
00545         }
00546         if ( *p == '=' || *inp != '-' || inp[1] != '>' ) {
00547             MesPrint("&Illegal use if if[no]match in id statement");
00548             error = 1; goto AllDone;
00549         }
00550         if ( *p == 0 ) {
00551             MesPrint("&id-statement without = sign");
00552             error = 1; goto AllDone;
00553         }
00554         inp += 2; pp = inp;
00555         goto readlabel;
00556     }
00557     for(;;) {

```

```

00558     while ( *p && *p != '=' && *p != ',' ) {
00559         if ( *p == '(' ) SKIPBRA4(p)
00560         else if ( *p == '{' ) SKIPBRA5(p)
00561         else if ( *p == '[' ) SKIPBRA1(p)
00562         else p++;
00563     }
00564     if ( *p == '=' ) break;
00565     if ( *p == 0 ) {
00566         MesPrint("&id-statement without = sign");
00567         error = 1; goto AllDone;
00568     }
00569     /*
00570     We have either a secondary option or a syntax error
00571     */
00572     pp = inp;
00573     while ( FG.cTable[*pp] == 0 ) pp++;
00574     c = *pp; *pp = 0;
00575     i = sizeof(IdOptions)/sizeof(struct id_options);
00576     while ( --i >= 0 ) {
00577         if ( StrICmp(inp,IdOptions[i].name) == 0 ) break;
00578     }
00579     if ( i < 0 ) {
00580         MesPrint("&Illegal option %s in id-statement",inp);
00581         *pp = c; error = 1; p++; inp = p; continue;
00582     }
00583     opt = IdOptions[i].code;
00584     *pp = c;
00585     inp = pp+1;
00586     switch ( opt ) {
00587         case SUBDISORDER:
00588             if ( pp != p ) goto IllField;
00589             AC.idoption |= SUBDISORDER;
00590             p++; inp = p;
00591             break;
00592         case SUBSELECT:
00593             if ( p != pp ) goto IllField;
00594             if ( ( AC.idoption & SUBMASK ) != 0 ) {
00595                 if ( AC.idoption == SUBMULTI && type == TYPEIF ) {}
00596                 else {
00597                     MesPrint("&Conflicting options in id-statement");
00598                     error = 1;
00599                 }
00600             }
00601     findsets;
00602     /*
00603     Now we read the sets
00604     */
00605     numsets = 0;
00606     for(;;) {
00607         inp = ++p;
00608         while ( *p && *p != '=' && *p != ',' ) {
00609             if ( *p == '(' ) SKIPBRA4(p)
00610             else if ( *p == '{' ) SKIPBRA5(p)
00611             else if ( *p == '[' ) SKIPBRA1(p)
00612             else p++;
00613         }
00614         if ( *p == '=' ) break;
00615         if ( *p == 0 ) {
00616             MesPrint("&id-statement without = sign");
00617             error = 1; goto AllDone;
00618         }
00619     /*
00620     We have a set at inp.
00621     */
00622     if ( *inp == '{' ) {
00623         if ( p[-1] != '}' ) {
00624             c = *p; *p = 0;
00625             MesPrint("&Illegal temporary set: %s",inp);
00626             error = 1; *p = c;
00627         }
00628         else {
00629             inp++;
00630             c = p[-1]; p[-1] = 0;
00631             c1 = DoTempSet(inp,p-1);
00632             *w++ = c1;
00633             p[-1] = c;
00634             numsets++;
00635             if ( w[-1] < 0 ) error = 1;
00636         }
00637     }
00638     else {
00639         c = *p; *p = 0;
00640         if ( GetName(AC.varnames,inp,&c1,NOAUTO) != CSET ) {
00641             MesPrint("&%s is not a set",inp);
00642             error = 1;
00643         }
00644     }

```

```

00645             if ( c1 < AM.NumFixedSets ) {
00646                 MesPrint("&Built in sets are not allowed in the select option");
00647                 error = 1;
00648             }
00649             else if ( Sets[c1].type == CRANGE ) {
00650                 MesPrint("&Ranged sets are not allowed in the select option");
00651                 error = 1;
00652             }
00653             numsets++;
00654             *w++ = c1;
00655         }
00656         *p = c;
00657     }
00658 }
00659 /*
00660     Now exchange the positions a bit.
00661     Regular stuff at OldWork, numsets sets at FirstWork[idhead]
00662 */
00663 OldWork = w;
00664 for ( i = 0; i < idhead; i++ ) *w++ = FirstWork[i];
00665 AC.idoption = SUBSELECT;
00666 break;
00667 case SUBAFTER:
00668 case SUBAFTERNOT:
00669     if ( type == TYPEIF ) {
00670         MesPrint("&The if[no]match->label option is not allowed in an if statement");
00671         error = 1; goto AllDone;
00672     }
00673     if ( pp[0] != '-' || pp[1] != '>' ) goto IllField;
00674     pp += 2; /* points now at the label */
00675     inp = pp;
00676     AC.idoption |= opt;
00677 readlabel:
00678     while ( FG.cTable[*pp] <= 1 ) pp++;
00679     if ( pp != p ) {
00680         c = *p; *p = 0;
00681         MesPrint("&Illegal label %s in if[no]match option of id-statement",inp);
00682         *p = c; error = 1; inp = p+1; continue;
00683     }
00684     c = *p; *p = 0;
00685     OldWork[3] = GetLabel(inp);
00686     *p++ = c; inp = p;
00687     break;
00688 case SUBALL:
00689     x = 0;
00690     if ( *pp == '(' ) {
00691         if ( FG.cTable[*inp] == 1 ) {
00692             while ( *inp >= '0' && *inp <= '9' ) x = 10*x+*inp++ - '0';
00693         }
00694         else {
00695             pp++;
00696             while ( FG.cTable[*inp] == 0 ) inp++;
00697             c = *inp; *inp = 0;
00698             if ( StrICont(pp,(UBYTE *)"normalize") != 0 ) goto IllOpt;
00699             *inp = c;
00700             OldWork[4] |= NORMALIZEFLAG;
00701         }
00702         if ( *inp != ')' || inp+1 != p ) {
00703             c = *inp; *inp = 0;
00704 IllOpt:
00705             MesPrint("&Illegal ALL option in id-statement: ",pp);
00706             *inp++ = c;
00707             error = 1;
00708             continue;
00709         }
00710         pp = inp;
00711         inp = pp+1;
00712     }
00713 /*
00714     Note that the following statement limits x to
00715 */
00716     if ( x > MAXPOSITIVE ) {
00717         MesPrint("&Requested maximum number of matches %1 in ALL option in id-statement is
greater than %1 ",x,MAXPOSITIVE);
00718         error = 1;
00719     }
00720     OldWork[5] = x;
00721     if ( type != TYPEIDNEW ) {
00722         if ( type == TYPEIDOLD ) {
00723             MesPrint("&Requested ALL option not allowed in idold/also statement.");
00724             error = 1;
00725         }
00726         else if ( type == TYPEIF ) {
00727             MesPrint("&Requested ALL option not allowed in if(match())");
00728             error = 1;
00729         }
00730         else {

```

```

00731             MesPrint("&ALL option only allowed in regular id-statement.");
00732             error = 1;
00733         }
00734     }
00735     p++; inp = p;
00736     AC.idoption = opt;
00737     break;
00738     default:
00739         if ( pp != p ) {
00740     IllField:
00741             c = *p; *p = 0;
00742             MesPrint("&Illegal optionfield %s in id-statement",inp);
00743             *p = c; error = 1; inp = p+1; continue;
00744         }
00745         i = AC.idoption & SUBMASK;
00746         if ( i && i != opt ) {
00747             MesPrint("&Conflicting options in id-statement");
00748             error = 1; continue;
00749         }
00750         else AC.idoption |= opt;
00751         while ( *p == ',' ) p++;
00752         inp = p;
00753         break;
00754     }
00755     if ( ( AC.idoption & SUBMASK ) == 0 ) AC.idoption |= SUBMULTI;
00756     OldWork[2] = AC.idoption;
00757     /*
00758     Now we have a field till the = sign
00759     Now the subexpression prototype
00760     */
00761     AC.ProtoType = w;
00762     *w++ = SUBEXPRESSION;
00763     *w++ = SUBEXPSIZE;
00764     *w++ = C->numrhs+1;
00765     *w++ = 1;
00766     *w++ = AC.cbufnum;
00767     FILLSUB(w)
00768     AC.WildC = w;
00769     AC.NwildC = 0;
00770     AT.WorkPointer = s = w + 4*AM.MaxWildcards + 8;
00771     /*
00772     Now read the LHS
00773     */
00774     ClearWildcardNames();
00775     oldcpointer = AddLHS(AC.cbufnum) - C->Buffer;
00776
00777     *p = 0;
00778     oldnumrhs = C->numrhs;
00779     if ( ( retcode = CompileAlgebra(inp,LHSIDE,AC.ProtoType) ) < 0 ) { error = 1; }
00780     else AC.ProtoType[2] = retcode;
00781     *p = '='; inp = p+1;
00782     AT.WorkPointer = s;
00783     if ( AC.NwildC && SortWild(w,AC.NwildC) ) error = 1;
00784
00785     /* Make the LHS pointers ready */
00786
00787     OldWork[1] = AC.WildC-OldWork;
00788     OldWork[idhead+1] = OldWork[1] - idhead;
00789     w = AC.WildC;
00790     AT.WorkPointer = w;
00791     s = C->rhs[C->numrhs];
00792     /*
00793     Now check whether wildcards get converted to dollars (for PARALLEL)
00794     */
00795     {
00796         WORD *tw, *twstop;
00797         tw = AC.ProtoType; twstop = tw + tw[1]; tw += SUBEXPSIZE;
00798         while ( tw < twstop ) {
00799             if ( *tw == LOADDOLLAR ) {
00800                 AddPotModdollar(tw[2]);
00801             }
00802             tw += tw[1];
00803         }
00804     }
00805     /*
00806     We have the expression in the compiler buffers.
00807     The main level is at lhs[numlhs]
00808     The partial lhs (including ProtoType) is in OldWork (in Workspace)
00809     We need to load the result at w after the prototype
00810     Because these sort routines don't use the Workspace
00811     there should not be a conflict
00812     */
00813     if ( !error && *s == 0 ) {
00814     IllLeft:MesPrint("&Illegal LHS");
00815         AC.lhdollarflag = 0;
00816         return(1);
00817     }

```

```

00818     if ( !error && *(s+s) != 0 ) {
00819         MesPrint("&LHS should be one term only");
00820         return(1);
00821     }
00822     if ( error == 0 ) {
00823         WORD oldpolyfun = AR.PolyFun;
00824         if ( NewSort(BHEAD0) || NewSort(BHEAD0) ) {
00825             if ( !error ) error = 1;
00826             return(error);
00827         }
00828         AN.RepPoint = AT.RepCount + 1;
00829         ow = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer;
00830         mm = s; ww = ow; i = *mm;
00831         while ( --i >= 0 ) { *ww++ = *mm++; } AT.WorkPointer = ww;
00832         AC.lhdollarflag = 0; oldEside = AR.Eside; AR.Eside = LHSIDE;
00833         AR.Cnumlhs = C->numlhs;
00834         AR.PolyFun = 0;
00835         if ( Generator(BHEAD ow,C->numlhs) ) {
00836             AR.Eside = oldEside;
00837             LowerSortLevel(); LowerSortLevel(); AR.PolyFun = oldpolyfun; goto IllLeft;
00838         }
00839         AR.Eside = oldEside;
00840         AT.WorkPointer = w;
00841         if ( EndSort(BHEAD w,0) < 0 ) { LowerSortLevel(); AR.PolyFun = oldpolyfun; goto IllLeft; }
00842         AR.PolyFun = oldpolyfun;
00843         if ( *w == 0 || *(w+w) != 0 ) {
00844             MesPrint("&LHS must be one term");
00845             AC.lhdollarflag = 0;
00846             return(1);
00847         }
00848         LowerSortLevel();
00849         if ( AC.lhdollarflag ) MarkDirty(w,DIRTYFLAG);
00850     }
00851     AT.WorkPointer = w + *w;
00852     AC.DumNum = 0;
00853 /*
00854     Everything is now after OldWork. We can pop the compilerbuffer.
00855     Next test for illegal things like a coefficient
00856     At this point we have:
00857     w = the term of the LHS
00858 */
00859     C->Pointer = C->Buffer + oldcpointer;
00860     C->numrhs = oldnumrhs;
00861     C->numlhs--;
00862
00863     m = w + *w - 3;
00864     AC.vectorlikeLHS = 0;
00865     if ( !error ) {
00866         if ( m[2] != 3 || m[1] != 1 || *m != 1 ) {
00867             if ( *m == 1 && m[1] == 1 && m[2] == -3 ) {
00868                 MinusSign = 1;
00869             }
00870             else {
00871                 MesPrint("&Coefficient in LHS");
00872                 error = 1;
00873                 AC.DumNum = 0;
00874                 *w -= ABS(m[2])-3;
00875             }
00876         }
00877         if ( *w == 7 && w[1] == INDEX && w[3] < 0 ) {
00878             if ( ( AC.idoption & SUBMASK ) != 0 && ( AC.idoption & SUBMASK ) !=
00879                 SUBMULTI ) {
00880                 MesPrint("&Illegal option for substitution of a vector");
00881                 error = 1;
00882             }
00883             AC.DumNum = AM.IndDum;
00884             OldWork[2] = ( OldWork[2] - ( OldWork[2] & SUBMASK ) ) | SUBVECTOR;
00885             c1 = w[3];
00886             /* We overwrite the LHS */
00887             *w++ = INDTOIND;
00888             *w++ = 4;
00889             *w++ = AC.DumNum + WILDOffset;
00890             *w++ = 0;
00891             w[0] = 5;
00892             w[1] = VECTOR;
00893             w[2] = 4;
00894             w[3] = c1;
00895             w[4] = AC.DumNum + WILDOffset;
00896             OldWork[idhead+1] = w - OldWork - idhead;
00897             AC.vectorlikeLHS = 1;
00898         }
00899         else {
00900             AC.DumNum = 0;
00901             *w -= 3;
00902             i = OldWork[2] & SUBMASK;
00903             m = w + *w;
00904             if ( i == 0 || i == SUBMULTI ) {

```

```

00905         s = w+1;
00906         while ( s < m ) {
00907             if ( *s == SYMBOL ) {
00908                 j = s[1]/2; s += 2;
00909                 while ( --j >= 0 ) {
00910                     if ( ABS(s[1]) > 2*MAXPOWER ) {
00911                         OldWork[2] = ( OldWork[2] - i ) | SUBONCE;
00912                         break;
00913                     }
00914                     s += 2;
00915                 }
00916                 if ( j >= 0 ) break;
00917             }
00918             else if ( *s == DOTPRODUCT ) {
00919                 j = s[1]/3; s += 2;
00920                 while ( --j >= 0 ) {
00921                     if ( ABS(s[2]) > 2*MAXPOWER ) {
00922                         OldWork[2] = ( OldWork[2] - i ) | SUBONCE;
00923                         break;
00924                     }
00925                     else if ( s[1] >= -(2*WILDOFFSET) || s[0] >= -(2*WILDOFFSET) ) {
00926                         OldWork[2] = ( OldWork[2] - i ) | SUBMANY;
00927                         i = SUBMANY;
00928                     }
00929                     s += 3;
00930                 }
00931                 if ( j >= 0 ) break;
00932             }
00933             else {
00934                 OldWork[2] = ( OldWork[2] - i ) | SUBMANY;
00935                 break;
00936             }
00937         }
00938     }
00939     if ( ( OldWork[2] & SUBMASK ) == 0 ) OldWork[2] |= SUBMULTI;
00940 }
00941 if ( ( OldWork[2] & SUBMASK ) == SUBSELECT ) {
00942     /*
00943         Paste the SETSET information after the pattern.
00944         Important note: We will still get function information for the
00945         smart patternmatching after it. To distinguish them we need to have
00946         that SETSET != m*n+1 in which m is the number of words per function
00947         and n the number of functions. Currently (29-may-1997) m = 4.
00948     */
00949     *m++ = SETSET;
00950     *m++ = numsets+2;
00951     s = FirstWork + idhead;
00952     while ( --numsets >= 0 ) *m++ = *s++;
00953 }
00954 else {
00955     m = w + *w;
00956 }
00957 }
00958 /*
00959     We keep the whole thing in OldWork for the moment.
00960     We still have to add the number of the RHS expression.
00961     There is also some opportunity now to be smart about the pattern.
00962     This is needed for complicated wilddcarding with symmetric functions.
00963     We do this in a special routine during compile time to make sure
00964     that we loose as little time as possible (during running) if there
00965     is no need to be smart.
00966 */
00967 *m++ = 0;
00968 OldWork[1] = m - OldWork;
00969 AC.ProtoType = OldWork+idhead;
00970 if ( !error ) {
00971     if ( StudyPattern(OldWork) ) error = 1;
00972 }
00973 AT.WorkPointer = OldWork + OldWork[1];
00974 if ( AC.lhdollarflag ) OldWork[4] |= DOLLARFLAG;
00975 AC.lhdollarflag = 0;
00976 /*
00977     Test whether the id/idold configuration is fine.
00978 */
00979 if ( type == TYPEIDOLD ) {
00980     WORD ci = C->numlhs;
00981     while ( ci >= 1 ) {
00982         if ( C->lhs[ci][0] == TYPEIDNEW ) {
00983             if ( (C->lhs[ci][2] & SUBMASK) == SUBALL ) {
00984                 MesPrint("&Idold/also cannot follow an id,all statement.");
00985                 error = 1;
00986             }
00987             break;
00988         }
00989         else if ( C->lhs[ci][0] == TYPEDETCURDUM ) { ci--; continue; }
00990         else if ( C->lhs[ci][0] == TYPEIDOLD ) { ci--; continue; }
00991         else ci = 0;

```

```

00992     }
00993     if ( ci < 1 ) {
00994         MesPrint("&Idold/also should follow an id/idnew statement.");
00995         error = 1;
00996     }
00997 }
00998 /*
00999 Now the right hand side.
01000 */
01001 if ( type != TYPEIF ) {
01002     if ( ( retcode = CompileAlgebra(inp,RHSIDE,AC.ProtoType) ) < 0 ) error = 1;
01003     else {
01004         AC.ProtoType[2] = retcode;
01005         AC.DumNum = 0;
01006         if ( MinusSign ) { /* Flip the sign of the RHS */
01007             w = C->rhs[retcode];
01008             while ( *w ) { w += *w; w[-1] = -w[-1]; }
01009         }
01010         if ( AC.dumnumflag ) Add2Com(TYPEDETCURDUM)
01011     }
01012 }
01013 /*
01014 Actual adding happens only now after numrhs insertion
01015 */
01016 if ( !error ) { AddNtoL(OldWork[1],OldWork); }
01017 AllDone:
01018 AC.lhdollarflag = 0;
01019 AT.WorkPointer = FirstWork;
01020 return(error);
01021 }
01022
01023 /*
01024 #] CoIdExpression :
01025 #[ CoMultiply :
01026 */
01027
01028 static WORD mularray[13] = { TYPEMULT, SUBEXPSIZE+3, 0, SUBEXPRESSION,
01029     SUBEXPSIZE, 0, 1, 0, 0, 0, 0, 0, 0, 0 };
01030
01031 int CoMultiply(UBYTE *inp)
01032 {
01033     UBYTE *p;
01034     int error = 0, RetCode;
01035     mularray[2] = 0; /* right multiply is default */
01036     while ( *inp == ',' ) inp++;
01037     /* if ( inp[-1] == '-' || inp[-1] == '+' ) inp--; */
01038     p = SkipField(inp,0);
01039     if ( *p ) {
01040         *p = 0;
01041         if ( StrICont(inp,(UBYTE *)"left") == 0 ) mularray[2] = 1;
01042         else if ( StrICont(inp,(UBYTE *)"right") == 0 ) mularray[2] = 0;
01043         else {
01044             MesPrint("&Illegal option in multiply statement or ; forgotten.");
01045             return(1);
01046         }
01047         *p = ',';
01048         inp = p + 1;
01049     }
01050     ClearWildcardNames();
01051     while ( *inp == ',' ) inp++;
01052     AC.ProtoType = mularray+3;
01053     mularray[7] = AC.cbufnum;
01054     if ( ( RetCode = CompileAlgebra(inp,RHSIDE,AC.ProtoType) ) < 0 ) error = 1;
01055     else {
01056         mularray[5] = RetCode;
01057         AddNtoL(SUBEXPSIZE+3,mularray);
01058         if ( AC.dumnumflag ) Add2Com(TYPEDETCURDUM)
01059     }
01060     return(error);
01061 }
01062
01063 /*
01064 #] CoMultiply :
01065 #[ CoFill :
01066
01067 Special additions for tablebase-like tables added 12-aug-2002
01068 */
01069 int CoFill(UBYTE *inp)
01070 {
01071     GETIDENTITY
01072     WORD error = 0, x, xx, funnum, type, *oldwp = AT.WorkPointer;
01073     int i, oldcbufnum = AC.cbufnum, nofill = 0, numover, redef = 0;
01074     WORD *w, *wold, *Tprototype;
01075     UBYTE *p = inp, c, *inpl;
01076     TABLES T = 0, oldT;
01077     LONG newreservation, sum = 0;

```

```

01079     UBYTE *p1, *p2, *p3, *p4, *fake = 0;
01080     int tablestub = 0;
01081     if ( AC.exprfillwarning == 1 ) AC.exprfillwarning = 0;
01082     /*
01083     Read the name of the function and test that it is in the table.
01084     */
01085     p1 = inp;
01086     if ( ( p = SkipAName(inp) ) == 0 ) return(1);
01087     p2 = p;
01088     c = *p; *p = 0;
01089     if ( ( GetVar(inp,&type,&funnum,CFUNCTION,WITHAUTO) == NAMENOTFOUND )
01090     || ( T = functions[funnum].tabl ) == 0 || ( T->numind > 0 && c != '(' ) ) {
01091         MesPrint("%s should be a table with argument(s)",inp);
01092         *p = c; return(1);
01093     }
01094     oldT = T;
01095     *p++ = c;
01096     if ( T->numind == 0 ) {
01097         if ( c == '(' ) {
01098             if ( *p != ')' ) {
01099                 c = *p; *p = 0;
01100                 MesPrint("%s should be a table without arguments",inp);
01101                 *p = c; return(1);
01102             }
01103             else { p++; }
01104         }
01105         else { p--; }
01106         sum = 0;
01107         p3 = p;
01108         goto andagain;
01109     }
01110     w = oldwp;
01111     if ( T->numind < 0 ) { /* Pick up the first index */
01112         ParseSignedNumber(xx,p);
01113         if ( FG.cTable[p[-1]] != 1 || *p != ',' || xx < 1 || ( xx > ( -T->numind - 1 ) ) ) {
01114             MesPrint("&No valid number of table indices in *-table fill statement.");
01115             return(1);
01116         }
01117         *w++ = xx;
01118         p++;
01119     }
01120     else { xx = T->numind; }
01121     for ( sum = 0, i = 0; i < xx; i++ ) {
01122         ParseSignedNumber(x,p);
01123         if ( FG.cTable[p[-1]] != 1 || ( *p != ',' && *p != ')' ) ) {
01124             MesPrint("&Table arguments in fill statement should be numbers");
01125             return(1);
01126         }
01127         if ( T->sparse ) *w++ = x;
01128         else if ( x < T->mm[i].mini || x > T->mm[i].maxi ) {
01129             MesPrint("&Value %d for argument %d of table out of bounds",x,i+1);
01130             error = 1; nofill = 1;
01131         }
01132         else sum += ( x - T->mm[i].mini ) * T->mm[i].size;
01133         if ( *p == ')' ) break;
01134         p++;
01135     }
01136     p3 = p;
01137     if ( T->numind < 0 ) {
01138         for ( ; i < ABS(T->numind)-1; i++ ) *w++ = 0;
01139         xx = -T->numind;
01140     }
01141     if ( *p != ')' || i < ( xx - 1 ) ) {
01142         MesPrint("&Incorrect number of table arguments in fill statement. Should be %d",
01143         ,T->numind);
01144         error = 1; nofill = 1;
01145     }
01146     AT.WorkPointer = w;
01147     if ( T->sparse == 0 ) sum *= TABLEEXTENSION;
01148     andagain:;
01149     AC.cbunum = T->bunum;
01150     if ( T->sparse ) {
01151         i = FindTableTree(T,oldwp,1);
01152         if ( i >= 0 ) {
01153             sum = i + ABS(T->numind);
01154             if ( tablestub == 0 && ( ( T->sparse & 2 ) == 2 ) && ( T->mode != 0 )
01155             && ( AC.vetotablebasefill == 0 ) ) {
01156                 /*
01157                 This redefinition does not need a new stub
01158                 */
01159                 functions[funnum].tabl = T = T->sparse;
01160                 tablestub = 1;
01161                 goto andagain;
01162             }
01163             redef = 1;
01164             goto redef;
01165         }

```



```

01166         if ( T->totind >= T->reserved ) {
01167             if ( T->reserved == 0 ) newreservation = 20;
01168             else newreservation = T->reserved;
01169             while ( T->totind >= newreservation && newreservation < MAXTABLECOMBUF )
01170                 newreservation = 2*newreservation;
01171             if ( newreservation > MAXTABLECOMBUF ) newreservation = MAXTABLECOMBUF;
01172             if ( T->totind >= newreservation ) {
01173                 MesPrint("@More than %ld elements in sparse table",MAXTABLECOMBUF);
01174                 AC.cbufnum = oldcbufnum;
01175                 Terminate(-1);
01176             }
01177             wold = (WORD *)Malloc1(newreservation*sizeof(WORD)*
01178                                   (ABS(T->numind)+TABLEEXTENSION),"tablepointers");
01179             for ( i = T->reserved*(ABS(T->numind)+TABLEEXTENSION)-1; i >= 0; i-- )
01180                 wold[i] = T->tablepointers[i];
01181             if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
01182             T->tablepointers = wold;
01183             T->reserved = newreservation;
01184         }
01185         w = oldwp;
01186         for ( sum = T->totind*(ABS(T->numind)+TABLEEXTENSION), i = 0; i < ABS(T->numind); i++ ) {
01187             T->tablepointers[sum++] = *w++;
01188         }
01189         InsTableTree(T,T->tablepointers+sum-ABS(T->numind));
01190 #if TABLEEXTENSION == 2
01191         T->tablepointers[sum+TABLEEXTENSION-1] = -1; /* New element! */
01192 #else
01193         T->tablepointers[sum+1] = T->bufnum;
01194         T->tablepointers[sum+2] = -1;
01195         T->tablepointers[sum+3] = -1;
01196         T->tablepointers[sum+4] = 0;
01197         T->tablepointers[sum+5] = 0;
01198 #endif
01199     }
01200     else {
01201         if ( !nofill && T->tablepointers[sum] >= 0 ) {
01202             redef::
01203                 if ( AC.vetofilling ) nofill = 1;
01204                 else {
01205                     Warning("Table element was already defined. New definition will be used");
01206                 }
01207         }
01208 #if TABLEEXTENSION == 2
01209         T->tablepointers[sum+TABLEEXTENSION-1] = -1; /* New element! */
01210 #else
01211         T->tablepointers[sum+1] = T->bufnum;
01212         T->tablepointers[sum+2] = -1;
01213         T->tablepointers[sum+3] = -1;
01214         T->tablepointers[sum+4] = 0;
01215         T->tablepointers[sum+5] = 0;
01216 #endif
01217     }
01218     if ( T->numind ) { p++; }
01219     if ( *p != '=' ) {
01220         MesPrint("&Fill statement misses = sign after the table element");
01221         AC.cbufnum = oldcbufnum;
01222         AT.WorkPointer = oldwp;
01223         functions[funnum].tabl = oldT;
01224         return(1);
01225     }
01226     if ( tablestub == 0 && T->mode == 1 && AC.vetotablebasefill == 0 ) {
01227         /*
01228          Here we construct a righthandside from the indices and the wildcards
01229         */
01230         int numfake;
01231         tablestub = 1;
01232         p4 = T->argtail;
01233         while ( *p4 ) p4++;
01234         numfake = (p4-T->argtail)+(p3-p1)+10;
01235
01236         fake = (UBYTE *)Malloc1(numfake*sizeof(UBYTE),"Fill fake rhs");
01237         p = fake;
01238         *p++ = 't'; *p++ = 'b'; *p++ = 'l'; *p++ = '_'; *p++ = '(';
01239         p4 = p1; while ( p4 < p2 ) *p++ = *p4++; *p++ = ',';
01240         p4 = p2+1; while ( p4 < p3 ) *p++ = *p4++;
01241         if ( T->argtail ) {
01242             p4 = T->argtail + 1;
01243             while ( FG.cTable[*p4] == 1 ) p4++;
01244             while ( *p4 ) {
01245                 if ( *p4 == '?' && p[-1] != ',' ) {
01246                     p4++;
01247                     if ( FG.cTable[*p4] == 0 || *p4 == '$' || *p4 == '[' ) {
01248                         p4 = SkipAName(p4);
01249                         if ( *p4 == '[' ) {
01250                             SKIPBRA1(p4);
01251                         }
01252                     }
01253                 }

```

```

01253         else if ( *p4 == '{' ) {
01254             SKIPBRA2(p4);
01255         }
01256         else if ( *p4 ) { *p++ = *p4++; continue; }
01257     }
01258     else *p++ = *p4++;
01259 }
01260 }
01261 *p++ = ' ';
01262 *p = 0;
01263 inpl = fake;
01264 }
01265 else {
01266     inpl = ++p;
01267 }
01268 c = 0;
01269 /*
01270  Now we have the indices and p points to the rhs.
01271 */
01272 numover = 0;
01273 AC.tablefilling = funnum;
01274 while ( *inpl ) {
01275     p = SkipField(inpl,0);
01276     c = *p; *p = 0;
01277 #ifdef WITHPTHREADS
01278     Tprototype = T->prototype[0];
01279 #else
01280     Tprototype = T->prototype;
01281 #endif
01282     if ( ( i = CompileAlgebra(inpl,RHSIDE,Tprototype) ) < 0 ) { error = 1; i = 0; }
01283     if ( !nofill ) {
01284         T->tablepointers[sum] = i;
01285         T->tablepointers[sum+1] = T->bufnum;
01286     }
01287     AC.DumNum = 0;
01288     *p = c;
01289     if ( T->sparse || c == 0 ) break;
01290     inpl = ++p;
01291 #if ( TABLEEXTENSION == 2 )
01292     sum++;
01293 #else
01294     sum += 2;
01295 #endif
01296     if ( !nofill && T->tablepointers[sum] >= 0 ) numover++;
01297 #if ( TABLEEXTENSION == 2 )
01298     sum++;
01299 #else
01300     sum += TABLEEXTENSION-2;
01301 #endif
01302 }
01303 if ( AC.exprfillwarning == 1 ) {
01304     AC.exprfillwarning = 2;
01305     Warning("Use of expressions and/or $variables in Fill statements is potentially very
dangerous.");
01306 }
01307 AC.tablefilling = 0;
01308 if ( T->sparse && c != 0 ) {
01309     MesPrint("&In sparse tables one can fill only one element at a time");
01310     error = 1;
01311 }
01312 else if ( numover ) {
01313     if ( numover == 1 )
01314         Warning("one element was overwritten. New definition will be used");
01315     else if ( AC.WarnFlag )
01316         MesPrint("&Warning: %d elements were overwritten. New definitions will be used",numover);
01317 }
01318 if ( T->sparse ) {
01319     if ( redef == 0 ) T->totind++;
01320 }
01321 else T->defined++;
01322 /*
01323 NumSets = AC.SetList.numtemp;
01324 NumSetElements = AC.SetElementList.numtemp;
01325 */
01326 if ( fake ) {
01327     M_free(fake,"Fill fake rhs");
01328     fake = 0;
01329     functions[funnum].tabl = T = T->sparse;
01330     p = p3;
01331     goto andagain;
01332 }
01333 AC.cbufnum = oldcbufnum;
01334 AC.SymChangeFlag = 1;
01335 AT.WorkPointer = oldwp;
01336 functions[funnum].tabl = oldT;
01337 return(error);
01338 }

```

```

01339
01340 /*
01341 #] CoFill :
01342 #[ CoFillExpression :
01343
01344 Syntax: FillExpression table = expression(x1,...,xn);
01345 The arguments should have been bracketed. Each corresponds to one
01346 of the dimensions of the table. Then the bracket with x1^2*x3^4
01347 will fill the (2,0,4) element of the table (if n=3 of course).
01348 Brackets that don't fit will be skipped. It just gives a warning.
01349
01350 New option (13-jul-2005)
01351 Syntax: FillExpression table = expression(f);
01352 The table indices are arguments of the function f which should
01353 have been bracketed before.
01354 */
01355
01356 int CoFillExpression(UBYTE *inp)
01357 {
01358     GETIDENTITY
01359     UBYTE *p, c;
01360     WORD type, funnum, expnum, symnum, numsym = 0, *oldwork = AT.WorkPointer;
01361     WORD *brackets, *term, brasize, *b, *m, *w, *pw, *tstop, zero = 0;
01362     WORD oldcbuf = AC.cbufnum, curelement = 0;
01363     int weneedit, i, j, numzero, pow, numfirst;
01364     TABLES T = 0;
01365     LONG newreservation, numcommu, sum;
01366     POSITION oldposition;
01367     FILEHANDLE *fi;
01368     CBUF *C;
01369     WORD numdummies;
01370
01371     AN.IndDum = AM.IndDum;
01372     if ( ( p = SkipAName(inp) ) == 0 ) return(1);
01373     c = *p; *p = 0;
01374     if ( ( GetVar(inp,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01375     || ( T = functions[funnum].tabl ) == 0 ) {
01376         MesPrint("%s should be a previously declared table",inp);
01377         *p = c; return(1);
01378     }
01379     *p++ = c;
01380     if ( T->spare ) T = T->spare;
01381     C = cbuf + T->bufnum;
01382     if ( c != '=' ) {
01383         MesPrint("%sNo = sign in FillExpression statement");
01384         return(1);
01385     }
01386     inp = p;
01387     if ( ( p = SkipAName(inp) ) == 0 ) return(1);
01388     c = *p; *p = 0;
01389     if ( ( type = GetName(AC.exprnames,inp,&expnum,NOAUTO) ) == NAMENOTFOUND
01390     || c != '(' || (
01391         Expressions[expnum].status != LOCALEXPRESSION &&
01392         Expressions[expnum].status != SKIPLEXPRESSION &&
01393         Expressions[expnum].status != DROPLEXPRESSION &&
01394         Expressions[expnum].status != GLOBALEXPRESSION &&
01395         Expressions[expnum].status != SKIPGEXPRESSION &&
01396         Expressions[expnum].status != DROPGEXPRESSION ) ) {
01397         MesPrint("%s should be an active expression with arguments",inp);
01398         *p = c; return(1);
01399     }
01400     if ( Expressions[expnum].inmem ) {
01401         MesPrint("%s cannot be used in a FillExpression statement in the same %n\
01402 module that it has been redefined",inp);
01403         *p = c; return(1);
01404     }
01405     *p++ = c;
01406     while ( *p ) {
01407         inp = p;
01408         if ( ( p = SkipAName(inp) ) == 0 ) return(1);
01409         c = *p; *p = 0;
01410
01411         if ( GetVar(inp,&type,&symnum,-1,NOAUTO) == NAMENOTFOUND ) {
01412             MesPrint("%s should be a previously declared symbol or function",inp);
01413             *p = c; return(1);
01414         }
01415         else if ( type == CSYMBOL ) {
01416             *p++ = c;
01417             *AT.WorkPointer++ = symnum;
01418             numsym++;
01419         }
01420         else if ( type == CFUNCTION ) {
01421             numsym = -1;
01422             *p++ = c;
01423             if ( c != ')' ) {
01424                 MesPrint("%sArgument should be a single function or a list of symbols");
01425                 return(1);

```

```

01426         }
01427         symnum += FUNCTION;
01428         *AT.WorkPointer++ = symnum;
01429     }
01430     else {
01431         MesPrint("%&s should be a previously declared symbol or function",inp);
01432         *p = c; return(1);
01433     }
01434     if ( c == ' ' ) break;
01435     if ( c != ',' ) {
01436         MesPrint("%Illegal separator in FillExpression statement");
01437         goto noway;
01438     }
01439 }
01440 if ( *p ) {
01441     MesPrint("%Illegal end of FillExpression statement");
01442     goto noway;
01443 }
01444 /*
01445     We have the number of the table in funnum.
01446     The number of the expression in expnum, the table struct in T
01447     and either the numbers of the symbols in oldwork (there are numsym of them)
01448     or the number of the function in oldwork (just one and numsym = -1).
01449     We don't sort them!!!!
01450 */
01451 if ( ( numsym > 0 ) && ( ABS(T->numind) != numsym ) ) {
01452     MesPrint("%This table needs %d symbols for its array indices");
01453     goto noway;
01454 }
01455 EXCHINOUT
01456 #ifdef WITHMPI
01457 /*
01458     * The workers can't access to the data of the input expression. We need to
01459     * broadcast it to all the workers.
01460 */
01461 PF_BroadcastExpr(&Expressions[expnum], AR.infile);
01462 if ( PF.me == MASTER ) {
01463     /*
01464         * Restore the file position on the master.
01465     */
01466     POSITION pos;
01467     SetEndScratch(AR.infile, &pos);
01468 }
01469 #endif
01470 fi = AR.infile;
01471 if ( fi->handle >= 0 ) {
01472     PUTZERO(oldposition);
01473     SeekFile(fi->handle,&oldposition,SEEK_CUR);
01474     SetScratch(fi,&(Expressions[expnum].onfile));
01475     if ( ISNEGPOS(Expressions[expnum].onfile) ) {
01476         MesPrint("%File error in FillExpression");
01477         BACKINOUT
01478         goto noway;
01479     }
01480 }
01481 else {
01482 /*
01483     Note: Because everything fits inside memory we never get problems
01484     with excessive file sizes.
01485 */
01486     SETBASEPOSITION(oldposition,(UBYTE *) (fi->POfill)-(UBYTE *) (fi->PObuffer));
01487     fi->POfill = (WORD *) ((UBYTE *) (fi->PObuffer) + BASEPOSITION(Expressions[expnum].onfile));
01488 }
01489 pw = AT.WorkPointer;
01490 if ( numsym < 0 ) { brackets = pw + 1; }
01491 else { brackets = pw + numsym; }
01492 brasize = -1; wenedit = 0; /* stands for we need it */
01493 term = (WORD *) ((UBYTE *) (brackets)) + AM.MaxTer;
01494 AT.WorkPointer = (WORD *) ((UBYTE *) (term)) + AM.MaxTer;
01495 AC.cbunum = T->bunum;
01496 AC.tablefilling = funnum;
01497 if ( GetTerm(BHEAD term) > 0 ) { /* Skip prototype */
01498     while ( GetTerm(BHEAD term) > 0 ) {
01499         GETSTOP(term,tstop);
01500         w = m = term + 1;
01501         while ( m < tstop && *m != HAAKJE ) m += m[1];
01502         if ( *m != HAAKJE ) {
01503             MesPrint("%Illegal attempt to put an expression without brackets in a table");
01504             BACKINOUT
01505             goto noway;
01506         }
01507         if ( brasize == m - w ) {
01508             b = brackets;
01509             while ( *b == *w && w < m ) { b++; w++; }
01510             if ( w == m ) { /* Same as current bracket. Copy. */
01511                 if ( wenedit ) {
01512                     m += m[1] - 1;

```

```

01513         *m = *term - (m-term);
01514         AddNtoC(AC.cbufnum,*m,m,3);
01515         numdummies = DetCurDum(BHEAD term) - AM.IndDum;
01516         if ( numdummies > T->numdummies ) T->numdummies = numdummies;
01517     }
01518     continue; /* Next term */
01519 }
01520 }
01521 if ( weneedit ) {
01522     AddNtoC(AC.cbufnum,1,&zero,4); /* Terminate old bracket */
01523     numcommu = numcommute(C->rhs[curelement],&(C->NumTerms[curelement]));
01524     C->CanCommu[curelement] = numcommu;
01525 }
01526 b = brackets; w = term + 1;
01527 if ( numsym < 0 ) pw = oldwork + 1;
01528 else pw = oldwork + numsym;
01529 while ( w < m ) *b++ = *w++;
01530 brasize = b - brackets;
01531 /*
01532 Now compute the element. See whether we need it
01533 */
01534 if ( numsym < 0 ) {
01535     WORD *bb, bnum;
01536     if ( *brackets != symnum || brasize != brackets[1] ) {
01537         weneedit = 0; continue; /* Cannot work! */
01538     }
01539 /*
01540 Now count the number of arguments and whether they are numbers
01541 */
01542 b = brackets + FUNHEAD;
01543 bb = brackets+brackets[1];
01544 i = 0;
01545 if ( T->numind < 0 ) {
01546     bnum = b[1]+1;
01547     if ( bnum > -T->numind ) {
01548         weneedit = 0; continue; /* Cannot work! */
01549     }
01550 }
01551 else bnum = T->numind;
01552 while ( b < bb ) {
01553     if ( *b != -SNUMBER ) break;
01554     i++;
01555     b += 2;
01556 }
01557 if ( b < bb || i != bnum ) {
01558     weneedit = 0; continue; /* Cannot work! */
01559 }
01560 }
01561 else if ( brasize > 0 && ( *brackets != SYMBOL
01562 || brackets[1] < brasize || (brackets[1]-2) > numsym*2 ) ) {
01563     weneedit = 0; continue; /* Cannot work! */
01564 }
01565 numzero = 0; sum = 0;
01566 numfirst = 0;
01567 if ( numsym > 0 ) {
01568     for ( i = 0; i < numsym; i++ ) {
01569         if ( brasize > 0 ) {
01570             b = brackets + 2; j = brackets[1]-2;
01571             while ( j > 0 ) {
01572                 if ( *b == oldwork[i] ) break;
01573                 j -= 2; b += 2;
01574             }
01575             if ( j <= 0 ) { /* it was not there */
01576                 numzero++; pow = 0;
01577                 if ( 2*numzero+brackets[1]-2 > numsym*2 ) {
01578                     weneedit = 0; goto nextterm;
01579                 }
01580             }
01581             else pow = b[1];
01582         }
01583         else pow = 0;
01584         if ( T->sparse ) {
01585             if ( T->numind < 0 ) {
01586                 if ( i == 0 ) {
01587                     numfirst = pow;
01588                     if ( pow > -T->numind ) {
01589                         weneedit = 0; goto nextterm;
01590                     }
01591                 }
01592                 else if ( i > pow ) {
01593                     weneedit = 0; goto nextterm;
01594                 }
01595             }
01596             *pw++ = pow;
01597         }
01598         else if ( pow < T->mm[i].mini || pow > T->mm[i].maxi ) {
01599             weneedit = 0; goto nextterm;

```

```

01600         }
01601         else sum += ( pow - T->mm[i].mini ) * T->mm[i].size;
01602     }
01603 }
01604 else {
01605     WORD xx;
01606     b = brackets + FUNHEAD;
01607     sum = 0;
01608 /*
01609     Now scan the arguments of the function.
01610     We did check already the number and type of the arguments.
01611 */
01612     xx = (brackets[1]-FUNHEAD)/2;
01613     for ( i = 0; i < xx; i++ ) {
01614         pow = b[1];
01615         b += 2;
01616         if ( T->sparse ) {
01617             if ( T->numind < 0 ) {
01618                 if ( i == 0 ) {
01619                     numfirst = pow;
01620                     if ( pow >= -T->numind ) {
01621                         weneedit = 0; goto nextterm;
01622                     }
01623                 }
01624             }
01625             *pw++ = pow;
01626         }
01627         else if ( pow < T->mm[i].mini || pow > T->mm[i].maxi ) {
01628             weneedit = 0; goto nextterm;
01629         }
01630         else sum += ( pow - T->mm[i].mini ) * T->mm[i].size;
01631     }
01632 }
01633 if ( T->numind < 0 ) {
01634     for ( i = numfirst+1; i < -T->numind; i++ ) *pw++ = 0;
01635 }
01636 weneedit = 1;
01637 if ( T->sparse ) {
01638     if ( numsym < 0 ) pw = oldwork + 1;
01639     else pw = oldwork + ABS(T->numind);
01640     i = FindTableTree(T,pw,1);
01641     if ( i >= 0 ) {
01642         sum = i+ABS(T->numind);
01643 /*
01644 Wrong!!!!
01645 */
01646         C->rhs[T->tablepointers[sum]] = C->Pointer;
01647         C->Pointer--; /* Back up over the zero */
01648         goto newentry;
01649     }
01650     if ( T->totind >= T->reserved ) {
01651         if ( T->reserved == 0 ) newreservation = 20;
01652         else newreservation = T->reserved;
01653 /*---Copied from Fill-----*/
01654         while ( T->totind >= newreservation && newreservation < MAXTABLECOMBUF )
01655             newreservation = 2*newreservation;
01656         if ( newreservation > MAXTABLECOMBUF ) newreservation = MAXTABLECOMBUF;
01657         if ( T->totind >= newreservation ) {
01658             MesPrint("@More than %ld elements in sparse table",MAXTABLECOMBUF);
01659             AC.cbufnum = oldcbuf;
01660             AT.WorkPointer = oldwork;
01661             Terminate(-1);
01662         }
01663 /*---Copied from Fill-----*/
01664         if ( T->totind >= newreservation ) {
01665             MesPrint("@More than %ld elements in sparse table",MAXTABLECOMBUF);
01666             AC.cbufnum = oldcbuf;
01667             AT.WorkPointer = oldwork;
01668             Terminate(-1);
01669         }
01670         w = (WORD *)Malloca1(newreservation*sizeof(WORD)*
01671             (ABS(T->numind)+TABLEEXTENSION),"tablepointers");
01672         for ( i = T->reserved*(ABS(T->numind)+TABLEEXTENSION)-1; i >= 0; i-- )
01673             w[i] = T->tablepointers[i];
01674         if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
01675         T->tablepointers = w;
01676         T->reserved = newreservation;
01677     }
01678     if ( numsym < 0 ) pw = oldwork + 1;
01679     else pw = oldwork + numsym;
01680     for ( sum = T->totind*(ABS(T->numind)+TABLEEXTENSION), i = 0; i < ABS(T->numind); i++
01681 ) {
01682         T->tablepointers[sum++] = *pw++;
01683     }
01684     InsTableTree(T,T->tablepointers+sum-ABS(T->numind));
01685     (T->totind)++;
01686 }
01687 #if ( TABLEEXTENSION != 2 )

```

```

01686         else {
01687             sum *= TABLEEXTENSION;
01688         }
01689 #endif
01690 /*
01691     Start a new entry. Copy the element.
01692 */
01693     AddRHS(T->bufnum,0);
01694     T->tablepointers[sum] = C->numrhs;
01695 #if ( TABLEEXTENSION == 2 )
01696     T->tablepointers[sum+TABLEEXTENSION-1] = -1;
01697 #else
01698     T->tablepointers[sum+1] = T->bufnum;
01699     T->tablepointers[sum+2] = -1;
01700     T->tablepointers[sum+3] = -1;
01701     T->tablepointers[sum+4] = 0;
01702     T->tablepointers[sum+5] = 0;
01703 #endif
01704 newentry: if ( *m == HAAKJE ) { m += m[1] - 1; }
01705           else m--;
01706           *m = *term - (m-term);
01707           AddNtoC(AC.cbufnum,*m,m,5);
01708           curelement = T->tablepointers[sum];
01709 nextterm:
01710     }
01711     if ( weneedit ) {
01712         AddNtoC(AC.cbufnum,1,&zero,6); /* Terminate old bracket */
01713         numcommu = numcommute(C->rhs[curelement],&(C->NumTerms[curelement]));
01714         C->CanCommu[curelement] = numcommu;
01715     }
01716 }
01717 if ( fi->handle >= 0 ) {
01718     SetScratch(fi,&(oldposition));
01719 }
01720 else {
01721     fi->POfill = (WORD *) ((UBYTE *) (fi->PObuffer) + BASEPOSITION(oldposition));
01722 }
01723 BACKINOUT
01724 AC.cbufnum = oldcbuf;
01725 AC.tablefilling = 0;
01726 AT.WorkPointer = oldwork;
01727 return(0);
01728 noway:
01729 BACKINOUT
01730 AC.cbufnum = oldcbuf;
01731 AC.tablefilling = 0;
01732 AT.WorkPointer = oldwork;
01733 return(1);
01734 }
01735
01736 /*
01737 #] CoFillExpression :
01738 #[ CoPrintTable :
01739
01740 Syntax
01741     PrintTable [+f] [+s] tablename [>[>] file];
01742 All defined elements are written with individual Fill statements.
01743 If a file is specified, the result is written to file only.
01744 The flags of the print statement apply as much as possible.
01745 We make use of the regular write routines.
01746 */
01747
01748 int CoPrintTable(UBYTE *inp)
01749 {
01750     GETIDENTITY
01751     int fflag = 0, sflag = 0, addflag = 0, error = 0, sum, i, j;
01752     UBYTE *filename, *p, c, buffer[100], *s, *oldoutputline = AO.OutputLine;
01753     WORD type, funnum, *expr, *m, num;
01754     TABLES T = 0;
01755     WORD oldSkip = AO.OutSkip, oldMode = AC.OutputMode, oldHandle = AC.LogHandle;
01756     WORD oldType = AO.PrintType, *oldwork = AT.WorkPointer;
01757     UBYTE *oldFill = AO.OutFill, *oldLine = AO.OutputLine;
01758 #ifdef WITHMPI
01759     if ( PF.me != MASTER ) return 0;
01760 #endif
01761 /*
01762     First the flags
01763 */
01764     while ( *inp == '+' ) {
01765         inp++;
01766         if ( *inp == 'f' || *inp == 'F' ) { fflag = 1; inp++; }
01767         else if ( *inp == 's' || *inp == 'S' ) { sflag = PRINTONETERM; inp++; }
01768         else {
01769             MesPrint("%Illegal + option in PrintTable statement");
01770             error = 1; inp++;
01771         }
01772     } while ( *inp != ',' && *inp && *inp != '+' ) {

```

```

01773         if ( !error ) {
01774             if ( *inp ) {
01775                 MesPrint("&Illegal + option in PrintTable statement");
01776                 inp++;
01777             }
01778             else {
01779                 MesPrint("&Unfinished PrintTable statement");
01780                 return(1);
01781             }
01782             error = 1;
01783         }
01784         inp++;
01785     }
01786     if ( *inp == ',' ) inp++;
01787 }
01788 /*
01789 Now the name of the table
01790 */
01791 if ( ( p = SkipAName(inp) ) == 0 ) return(1);
01792 c = *p; *p = 0;
01793 if ( ( GetVar(inp,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01794 || ( T = functions[funnum].tabl ) == 0 ) {
01795     MesPrint("&%s should be a previously declared table",inp);
01796     *p = c; return(1);
01797 }
01798 if ( T->sparse && T->mode == 1 ) T = T->sparse;
01799 *p++ = c;
01800 /*
01801 Check for a filename. Runs to the end of the statement.
01802 */
01803 filename = 0;
01804 if ( c == '>' ) {
01805     if ( *p == '>' ) { addflag = 1; p++; }
01806     filename = p;
01807 }
01808 else filename = 0;
01809
01810 if ( filename ) {
01811     if ( addflag ) AC.LogHandle = OpenAddFile((char *)filename);
01812     else AC.LogHandle = CreateFile((char *)filename);
01813     if ( AC.LogHandle < 0 ) {
01814         MesPrint("&Cannot open file '%s' properly",filename);
01815         error = 1; goto finally;
01816     }
01817     AO.PrintType = PRINTLFILE;
01818 }
01819 else if ( fflag && AC.LogHandle >= 0 ) {
01820     AO.PrintType = PRINTLFILE;
01821 }
01822 AO.OutFill = AO.OutputLine = (UBYTE *)AT.WorkPointer;
01823 AT.WorkPointer += 2*AC.LineLength;
01824
01825 AO.PrintType |= sflag;
01826 AC.OutputMode = 0;
01827 AO.IsBracket = 0;
01828 AO.OutSkip = 0;
01829 AR.DeferFlag = 0;
01830 AC.outsidefun = 1;
01831 if ( AC.LogHandle == oldHandle ) FiniLine();
01832 AO.OutputLine = AO.OutFill = (UBYTE *)Mallocl(AC.LineLength+20,"PrintTable");
01833 AO.OutStop = AO.OutFill + AC.LineLength;
01834 for ( i = 0; i < T->totind; i++ ) {
01835     if ( !T->sparse && T->tablepointers[i*TABLEEXTENSION] < 0 ) continue;
01836     TokenToLine((UBYTE *)"Fill ");
01837     TokenToLine((UBYTE *) (VARNAME(functions,funnum)));
01838     TokenToLine((UBYTE *) "(");
01839     AO.OutSkip = 3;
01840     if ( T->sparse ) {
01841         sum = i * ( T->numind + TABLEEXTENSION );
01842         for ( j = 0; j < T->numind; j++, sum++ ) {
01843             if ( j > 0 ) TokenToLine((UBYTE *)",");
01844             num = T->tablepointers[sum];
01845             s = buffer; s = NumCopy(num,s);
01846             TokenToLine(buffer);
01847         }
01848         expr = cbuf[T->bufnum].rhs[T->tablepointers[sum]];
01849     }
01850     else {
01851         for ( j = 0; j < T->numind; j++ ) {
01852             if ( j > 0 ) {
01853                 TokenToLine((UBYTE *)",");
01854                 num = T->mm[j].mini + ( i % T->mm[j-1].size ) / T->mm[j].size;
01855             }
01856             else {
01857                 num = T->mm[j].mini + i / T->mm[j].size;
01858             }
01859             s = buffer; s = NumCopy(num,s);

```



```

01860         TokenToLine(buffer);
01861     }
01862     expr = cbuf[T->bufnum].rhs[T->tablepointers[TABLEEXTENSION*i]];
01863 }
01864 TOKENTOLINE(" =",")=");
01865 if ( sflag ) {
01866     FiniLine();
01867     if ( AC.OutputSpaces != NOSPACEFORMAT ) TokenToLine((UBYTE *) " ");
01868 }
01869 m = expr;
01870 /*
01871     WORD lbrac, first;
01872     lbrac = 0; first = 1;
01873     while ( *m ) {
01874         if ( WriteTerm(m,&lbrac,first,1,0) ) {
01875             MesPrint("Error while writing table");
01876             error = 1;
01877             goto finally;
01878         }
01879         first = 0;
01880         m += *m;
01881     }
01882     if ( first ) { TOKENTOLINE(" 0","0") }
01883     else if ( lbrac ) { TOKENTOLINE(" ","") }
01884 */
01885     while ( *m ) m += *m;
01886     if ( m > expr ) {
01887         if ( WriteExpression(expr,(LONG)(m-expr)) ) { error = 1; goto finally; }
01888         AO.OutSkip = 0;
01889     }
01890     else {
01891         TokenToLine((UBYTE *) "0");
01892     }
01893     TokenToLine((UBYTE *) ";" );
01894     FiniLine();
01895 }
01896 M_free(AO.OutputLine,"PrintTable");
01897 AO.OutputLine = AO.OutFill = oldoutputline;
01898 /*
01899     Reset the file pointers and parameters if any. Close file if needed.
01900 */
01901 finally:
01902     AO.OutSkip = oldSkip;
01903     AC.OutputMode = oldMode;
01904     AC.LogHandle = oldHandle;
01905     AO.PrintType = oldType;
01906     AO.OutFill = oldFill;
01907     AO.OutputLine = oldLine;
01908     AT.WorkPointer = oldwork;
01909     AC.outsidefun = 0;
01910     return(error);
01911 }
01912
01913 /*
01914 #] CoPrintTable :
01915 #[ CoAssign :
01916
01917     This statement has an easy syntax:
01918     $name = expression
01919 */
01920
01921 static WORD AssignLHS[14] = { TYPEASSIGN, 3+SUBEXPSIZE, 0,
01922                             SUBEXPRESSION, SUBEXPSIZE, 0, 1, 0, 0,0,0,0,0 };
01923
01924 int CoAssign(UBYTE *inp)
01925 {
01926     int error = 0, retcode;
01927     UBYTE *name, c;
01928     WORD number;
01929     if ( *inp != '$' ) {
01930 nolhs: MesPrint("&assign statement should have a dollar variable in the LHS");
01931         return(1);
01932     }
01933     inp++; name = inp;
01934     if ( FG.cTable[*inp] != 0 ) goto nolhs;
01935     while ( FG.cTable[*inp] < 2 ) inp++;
01936     if ( AP.PreAssignFlag == 2 ) {
01937         if ( *inp == '_' ) inp++;
01938     }
01939     if ( ( *inp == ',' && inp[1] != '=' ) && ( *inp != '=' ) ) {
01940         MesPrint("&assign statement should have only a dollar variable in the LHS");
01941         return(1);
01942     }
01943     c = *inp;
01944     *inp = 0;
01945     if ( GetName(AC.dollarnames,name,&number,NOAUTO) == NAMENOTFOUND ) {
01946         number = AddDollar(name,DOLUNDEFINED,0,0);

```

```

01947     }
01948     *inp = c;
01949     if ( c == ',' ) inp++;
01950     *inp++ = '=';
01951     if ( *inp == ',' ) inp++;
01952 /*
01953     Fake a Prototype and read the RHS
01954 */
01955     AssignLHS[7] = AC.cbunum;
01956     retcode = CompileAlgebra(inp,RHSIDE,(AssignLHS+3));
01957     if ( retcode < 0 ) error = 1;
01958     AC.DumNum = 0;
01959 /*
01960     Now add the LHS
01961 */
01962     AssignLHS[2] = number;
01963     AssignLHS[5] = retcode;
01964     AddNtoL(AssignLHS[1],AssignLHS);
01965 /*
01966     Add to the list of potentially modified dollars (for PARALLEL)
01967 */
01968     AddPotModdollar(number);
01969     return(error);
01970 }
01971
01972 /*
01973     #] CoAssign :
01974     #[ CoDeallocateTable :
01975
01976     Syntax: DeallocateTable tablename(s);
01977     Should work only for sparse tables.
01978     Action: Cleans all definitions of elements of a table as if there have
01979            never been any fill statements.
01980 */
01981
01982 int CoDeallocateTable(UBYTE *inp)
01983 {
01984     UBYTE *p, c;
01985     TABLES T = 0;
01986     WORD type, funnum, i;
01987     c = *inp;
01988     while ( c ) {
01989         while ( *inp == ',' ) inp++;
01990         if ( *inp == 0 ) break;
01991         if ( ( p = SkipAName(inp) ) == 0 ) return(1);
01992         c = *p; *p = 0;
01993         if ( ( GetVar(inp,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01994             || ( T = functions[funnum].tabl ) == 0 ) {
01995             MesPrint("%s should be a previously declared table",inp);
01996             *p = c; return(1);
01997         }
01998         if ( T->sparse == 0 ) {
01999             MesPrint("%s should be a sparse table",inp);
02000             *p = c; return(1);
02001         }
02002         if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
02003         ClearTableTree(T);
02004         for ( i = 0; i < T->buffersfill; i++ ) { /* was <= */
02005             finishcbuf(T->buffers[i]);
02006         }
02007         T->bufnum = inicbufs();
02008         T->buffersfill = 0;
02009         T->buffers[T->buffersfill++] = T->bufnum;
02010         T->tablepointers = 0;
02011         T->boomlijst = 0;
02012         T->totind = 0;
02013         T->reserved = 0;
02014
02015         if ( T->sparse ) {
02016             TABLES TT = T->sparse;
02017             if ( TT->tablepointers ) M_free(TT->tablepointers,"tablepointers");
02018             ClearTableTree(TT);
02019             for ( i = 0; i < TT->buffersfill; i++ ) { /* was <= */
02020                 finishcbuf(TT->buffers[i]);
02021             }
02022             TT->bufnum = inicbufs();
02023             TT->buffersfill = 0;
02024             TT->buffers[T->buffersfill++] = T->bufnum;
02025             TT->tablepointers = 0;
02026             TT->boomlijst = 0;
02027             TT->totind = 0;
02028             TT->reserved = 0;
02029         }
02030         *p++ = c;
02031         inp = p;
02032     }
02033     return(0);

```

```

02034 }
02035
02036 /*
02037  #] CoDeallocateTable :
02038  #[ CoFactorCache :
02039 */
02040 /*
02041 int CoFactorCache(UBYTE *inp)
02042 {
02043     Code to be added in due time
02044     We need to read 'expression', get its terms through Generator and sort them.
02045     We store the result in the Workspace in argument notation.
02046     This will be argin.
02047     Then we do the same with the sequence of factors. They formargout.
02048     The whole is put in the buffer with the call
02049     InsertArg(BHEAD argin,argout,1)
02050     return(0);
02051 }
02052 */
02053 /*
02054  #] CoFactorCache :
02055 */

```


4.9 compcomm.c File Reference

```

#include "form3.h"
#include "comtool.h"

```

Include dependency graph for compcomm.c:

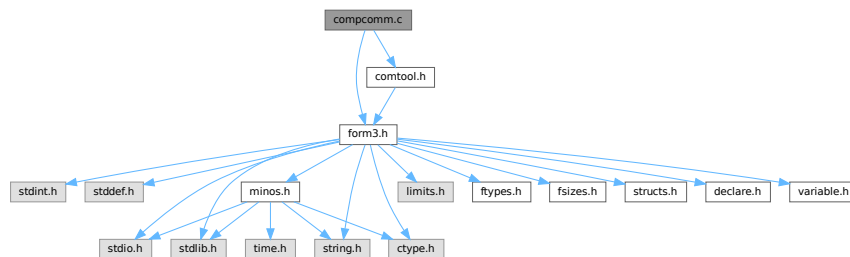

Functions

- int [CoFormat](#) (UBYTE *s)
- int [CoCollect](#) (UBYTE *s)
- int [setonoff](#) (UBYTE *s, int *flag, int onvalue, int offvalue)
- int [CoCompress](#) (UBYTE *s)
- int [CoFlags](#) (UBYTE *s, int value)
- int [CoOff](#) (UBYTE *s)
- int [CoOn](#) (UBYTE *s)
- int [CoInsideFirst](#) (UBYTE *s)
- int [CoProperCount](#) (UBYTE *s)
- int [CoDelete](#) (UBYTE *s)
- int [CoKeep](#) (UBYTE *s)
- int [CoFixIndex](#) (UBYTE *s)
- int [CoMetric](#) (UBYTE *s)
- int [DoPrint](#) (UBYTE *s, int par)
- int [CoPrint](#) (UBYTE *s)
- int [CoPrintB](#) (UBYTE *s)

- int [CoNPrint](#) (UBYTE *s)
- int [CoPushHide](#) (UBYTE *s)
- int [CoPopHide](#) (UBYTE *s)
- int [SetExprCases](#) (int par, int setunset, int val)
- int [SetExpr](#) (UBYTE *s, int setunset, int par)
- int [CoDrop](#) (UBYTE *s)
- int [CoNoDrop](#) (UBYTE *s)
- int [CoSkip](#) (UBYTE *s)
- int [CoNoSkip](#) (UBYTE *s)
- int [CoHide](#) (UBYTE *inp)
- int [CoIntoHide](#) (UBYTE *inp)
- int [CoNoIntoHide](#) (UBYTE *inp)
- int [CoNoHide](#) (UBYTE *inp)
- int [CoUnHide](#) (UBYTE *inp)
- int [CoNoUnHide](#) (UBYTE *inp)
- void [AddToCom](#) (int n, WORD *array)
- int [AddComString](#) (int n, WORD *array, UBYTE *thestring, int par)
- int [Add2ComStrings](#) (int n, WORD *array, UBYTE *string1, UBYTE *string2)
- int [CoDiscard](#) (UBYTE *s)
- int [CoContract](#) (UBYTE *s)
- int [CoGoTo](#) (UBYTE *inp)
- int [CoLabel](#) (UBYTE *inp)
- int [DoArgument](#) (UBYTE *s, int par)
- int [CoArgument](#) (UBYTE *s)
- int [CoEndArgument](#) (UBYTE *s)
- int [CoInside](#) (UBYTE *s)
- int [CoEndInside](#) (UBYTE *s)
- int [CoNormalize](#) (UBYTE *s)
- int [CoMakeInteger](#) (UBYTE *s)
- int [CoSplitArg](#) (UBYTE *s)
- int [CoSplitFirstArg](#) (UBYTE *s)
- int [CoSplitLastArg](#) (UBYTE *s)
- int [CoFactArg](#) (UBYTE *s)
- int [DoSymmetrize](#) (UBYTE *s, int par)
- int [CoSymmetrize](#) (UBYTE *s)
- int [CoAntiSymmetrize](#) (UBYTE *s)
- int [CoCycleSymmetrize](#) (UBYTE *s)
- int [CoRCycleSymmetrize](#) (UBYTE *s)
- int [CoWrite](#) (UBYTE *s)
- int [CoNWrite](#) (UBYTE *s)
- int [CoRatio](#) (UBYTE *s)
- int [CoRedefine](#) (UBYTE *s)
- int [CoRenumber](#) (UBYTE *s)
- int [CoSum](#) (UBYTE *s)
- int [CoToTensor](#) (UBYTE *s)
- int [CoToVector](#) (UBYTE *s)
- int [CoTrace4](#) (UBYTE *s)
- int [CoTraceN](#) (UBYTE *s)
- int [CoChisholm](#) (UBYTE *s)
- int [DoChain](#) (UBYTE *s, int option)
- int [CoChainin](#) (UBYTE *s)
- int [CoChainout](#) (UBYTE *s)
- int [CoExit](#) (UBYTE *s)
- int [CoInParallel](#) (UBYTE *s)
- int [CoNotInParallel](#) (UBYTE *s)

- int [DoInParallel](#) (UBYTE *s, int par)
- int [CoInExpression](#) (UBYTE *s)
- int [CoEndInExpression](#) (UBYTE *s)
- int [CoSetExitFlag](#) (UBYTE *s)
- int [CoTryReplace](#) (UBYTE *p)
- int [CoModulus](#) (UBYTE *inp)
- int [CoRepeat](#) (UBYTE *inp)
- int [CoEndRepeat](#) (UBYTE *inp)
- int [DoBrackets](#) (UBYTE *inp, int par)
- int [CoBracket](#) (UBYTE *inp)
- int [CoAntiBracket](#) (UBYTE *inp)
- int [CoMultiBracket](#) (UBYTE *inp)
- WORD * [CountComp](#) (UBYTE *inp, WORD *to)
- int [Colf](#) (UBYTE *inp)
- int [CoElse](#) (UBYTE *p)
- int [CoElseif](#) (UBYTE *inp)
- int [CoEndIf](#) (UBYTE *inp)
- int [CoWhile](#) (UBYTE *inp)
- int [CoEndWhile](#) (UBYTE *inp)
- int [DoFindLoop](#) (UBYTE *inp, int mode)
- int [CoFindLoop](#) (UBYTE *inp)
- int [CoReplaceLoop](#) (UBYTE *inp)
- int [CoFunPowers](#) (UBYTE *inp)
- int [CoUnitTrace](#) (UBYTE *s)
- int [CoTerm](#) (UBYTE *s)
- int [CoEndTerm](#) (UBYTE *s)
- int [CoSort](#) (UBYTE *s)
- int [CoPolyFun](#) (UBYTE *s)
- int [CoPolyRatFun](#) (UBYTE *s)
- int [CoMerge](#) (UBYTE *inp)
- int [CoStuffle](#) (UBYTE *inp)
- int [CoProcessBucket](#) (UBYTE *s)
- int [CoThreadBucket](#) (UBYTE *s)
- int [DoArgPlode](#) (UBYTE *s, int par)
- int [CoArgExplode](#) (UBYTE *s)
- int [CoArgImplode](#) (UBYTE *s)
- int [CoClearTable](#) (UBYTE *s)
- int [CoDenominators](#) (UBYTE *s)
- int [CoDropCoefficient](#) (UBYTE *s)
- int [CoDropSymbols](#) (UBYTE *s)
- int [CoToPolynomial](#) (UBYTE *inp)
- int [CoFromPolynomial](#) (UBYTE *inp)
- int [CoArgToExtraSymbol](#) (UBYTE *s)
- int [CoExtraSymbols](#) (UBYTE *inp)
- WORD * [GetIfDollarFactor](#) (UBYTE **inp, WORD *w)
- UBYTE * [GetDoParam](#) (UBYTE *inp, WORD **wp, int par)
- int [CoDo](#) (UBYTE *inp)
- int [CoEndDo](#) (UBYTE *inp)
- int [CoFactDollar](#) (UBYTE *inp)
- int [CoFactorize](#) (UBYTE *s)
- int [CoNFactorize](#) (UBYTE *s)
- int [CoUnFactorize](#) (UBYTE *s)
- int [CoNUnFactorize](#) (UBYTE *s)
- int [DoFactorize](#) (UBYTE *s, int par)
- int [CoOptimizeOption](#) (UBYTE *s)

- int [CoPutInside](#) (UBYTE *inp)
- int [CoAntiPutInside](#) (UBYTE *inp)
- int [DoPutInside](#) (UBYTE *inp, int par)
- int [CoSwitch](#) (UBYTE *s)
- int [CoCase](#) (UBYTE *s)
- int [CoBreak](#) (UBYTE *s)
- int [CoDefault](#) (UBYTE *s)
- int [CoEndSwitch](#) (UBYTE *s)
- int [CoSetUserFlag](#) (UBYTE *s)
- int [CoClearUserFlag](#) (UBYTE *s)
- int [CoCreateAllLoops](#) (UBYTE *s)
- int [CoCreateAllPaths](#) (UBYTE *s)
- int [CoCreateAll](#) (UBYTE *s)

4.9.1 Detailed Description

Compiler routines for most statements that don't involve algebraic expressions. Exceptions: all routines involving declarations are in the file [names.c](#) When making new statements one can add the compiler routines here and have a look whether there is already a routine that is similar. In that case one can make a copy and modify it.

Definition in file [compcomm.c](#).

4.9.2 Function Documentation

4.9.2.1 CoFormat()

```
int CoFormat (
    UBYTE * s )
```

Definition at line [154](#) of file [compcomm.c](#).

4.9.2.2 CoCollect()

```
int CoCollect (
    UBYTE * s )
```

Definition at line [434](#) of file [compcomm.c](#).

4.9.2.3 setonoff()

```
int setonoff (
    UBYTE * s,
    int * flag,
    int onvalue,
    int offvalue )
```

Definition at line [496](#) of file [compcomm.c](#).

4.9.2.4 CoCompress()

```
int CoCompress (
    UBYTE * s )
```

Definition at line 512 of file [compcomm.c](#).

4.9.2.5 CoFlags()

```
int CoFlags (
    UBYTE * s,
    int value )
```

Definition at line 561 of file [compcomm.c](#).

4.9.2.6 CoOff()

```
int CoOff (
    UBYTE * s )
```

Definition at line 596 of file [compcomm.c](#).

4.9.2.7 CoOn()

```
int CoOn (
    UBYTE * s )
```

Definition at line 662 of file [compcomm.c](#).

4.9.2.8 CoInsideFirst()

```
int CoInsideFirst (
    UBYTE * s )
```

Definition at line 934 of file [compcomm.c](#).

4.9.2.9 CoProperCount()

```
int CoProperCount (
    UBYTE * s )
```

Definition at line 941 of file [compcomm.c](#).

4.9.2.10 CoDelete()

```
int CoDelete (
    UBYTE * s )
```

Definition at line 948 of file [compcomm.c](#).

4.9.2.11 CoKeep()

```
int CoKeep (
    UBYTE * s )
```

Definition at line 993 of file [compcomm.c](#).

4.9.2.12 CoFixIndex()

```
int CoFixIndex (
    UBYTE * s )
```

Definition at line 1005 of file [compcomm.c](#).

4.9.2.13 CoMetric()

```
int CoMetric (
    UBYTE * s )
```

Definition at line 1039 of file [compcomm.c](#).

4.9.2.14 DoPrint()

```
int DoPrint (
    UBYTE * s,
    int par )
```

Definition at line 1047 of file [compcomm.c](#).

4.9.2.15 CoPrint()

```
int CoPrint (
    UBYTE * s )
```

Definition at line 1263 of file [compcomm.c](#).

4.9.2.16 CoPrintB()

```
int CoPrintB (
    UBYTE * s )
```

Definition at line 1270 of file [compcomm.c](#).

4.9.2.17 CoNPrint()

```
int CoNPrint (
    UBYTE * s )
```

Definition at line 1277 of file [compcomm.c](#).

4.9.2.18 CoPushHide()

```
int CoPushHide (
    UBYTE * s )
```

Definition at line [1284](#) of file [compcomm.c](#).

4.9.2.19 CoPopHide()

```
int CoPopHide (
    UBYTE * s )
```

Definition at line [1328](#) of file [compcomm.c](#).

4.9.2.20 SetExprCases()

```
int SetExprCases (
    int par,
    int setunset,
    int val )
```

Definition at line [1363](#) of file [compcomm.c](#).

4.9.2.21 SetExpr()

```
int SetExpr (
    UBYTE * s,
    int setunset,
    int par )
```

Definition at line [1518](#) of file [compcomm.c](#).

4.9.2.22 CoDrop()

```
int CoDrop (
    UBYTE * s )
```

Definition at line [1563](#) of file [compcomm.c](#).

4.9.2.23 CoNoDrop()

```
int CoNoDrop (
    UBYTE * s )
```

Definition at line [1570](#) of file [compcomm.c](#).

4.9.2.24 CoSkip()

```
int CoSkip (  
    UBYTE * s )
```

Definition at line 1577 of file [compcomm.c](#).

4.9.2.25 CoNoSkip()

```
int CoNoSkip (  
    UBYTE * s )
```

Definition at line 1584 of file [compcomm.c](#).

4.9.2.26 CoHide()

```
int CoHide (  
    UBYTE * inp )
```

Definition at line 1591 of file [compcomm.c](#).

4.9.2.27 CoIntoHide()

```
int CoIntoHide (  
    UBYTE * inp )
```

Definition at line 1609 of file [compcomm.c](#).

4.9.2.28 CoNoIntoHide()

```
int CoNoIntoHide (  
    UBYTE * inp )
```

Definition at line 1627 of file [compcomm.c](#).

4.9.2.29 CoNoHide()

```
int CoNoHide (  
    UBYTE * inp )
```

Definition at line 1634 of file [compcomm.c](#).

4.9.2.30 CoUnHide()

```
int CoUnHide (  
    UBYTE * inp )
```

Definition at line 1641 of file [compcomm.c](#).

4.9.2.31 CoNoUnHide()

```
int CoNoUnHide (
    UBYTE * inp )
```

Definition at line 1648 of file [compcomm.c](#).

4.9.2.32 AddToCom()

```
void AddToCom (
    int n,
    WORD * array )
```

Definition at line 1655 of file [compcomm.c](#).

4.9.2.33 AddComString()

```
int AddComString (
    int n,
    WORD * array,
    UBYTE * thestring,
    int par )
```

Definition at line 1670 of file [compcomm.c](#).

4.9.2.34 Add2ComStrings()

```
int Add2ComStrings (
    int n,
    WORD * array,
    UBYTE * string1,
    UBYTE * string2 )
```

Definition at line 1729 of file [compcomm.c](#).

4.9.2.35 CoDiscard()

```
int CoDiscard (
    UBYTE * s )
```

Definition at line 1770 of file [compcomm.c](#).

4.9.2.36 CoContract()

```
int CoContract (
    UBYTE * s )
```

Definition at line 1793 of file [compcomm.c](#).

4.9.2.37 CoGoTo()

```
int CoGoTo (
    UBYTE * inp )
```

Definition at line 1822 of file [compcomm.c](#).

4.9.2.38 CoLabel()

```
int CoLabel (
    UBYTE * inp )
```

Definition at line 1841 of file [compcomm.c](#).

4.9.2.39 DoArgument()

```
int DoArgument (
    UBYTE * s,
    int par )
```

Definition at line 1868 of file [compcomm.c](#).

4.9.2.40 CoArgument()

```
int CoArgument (
    UBYTE * s )
```

Definition at line 2119 of file [compcomm.c](#).

4.9.2.41 CoEndArgument()

```
int CoEndArgument (
    UBYTE * s )
```

Definition at line 2126 of file [compcomm.c](#).

4.9.2.42 CoInside()

```
int CoInside (
    UBYTE * s )
```

Definition at line 2152 of file [compcomm.c](#).

4.9.2.43 CoEndInside()

```
int CoEndInside (
    UBYTE * s )
```

Definition at line 2159 of file [compcomm.c](#).

4.9.2.44 CoNormalize()

```
int CoNormalize (
    UBYTE * s )
```

Definition at line 2185 of file [compcomm.c](#).

4.9.2.45 CoMakeInteger()

```
int CoMakeInteger (
    UBYTE * s )
```

Definition at line 2192 of file [compcomm.c](#).

4.9.2.46 CoSplitArg()

```
int CoSplitArg (
    UBYTE * s )
```

Definition at line 2199 of file [compcomm.c](#).

4.9.2.47 CoSplitFirstArg()

```
int CoSplitFirstArg (
    UBYTE * s )
```

Definition at line 2206 of file [compcomm.c](#).

4.9.2.48 CoSplitLastArg()

```
int CoSplitLastArg (
    UBYTE * s )
```

Definition at line 2213 of file [compcomm.c](#).

4.9.2.49 CoFactArg()

```
int CoFactArg (
    UBYTE * s )
```

Definition at line 2220 of file [compcomm.c](#).

4.9.2.50 DoSymmetrize()

```
int DoSymmetrize (
    UBYTE * s,
    int par )
```

Definition at line 2240 of file [compcomm.c](#).

4.9.2.51 CoSymmetrize()

```
int CoSymmetrize (  
    UBYTE * s )
```

Definition at line [2360](#) of file [compcomm.c](#).

4.9.2.52 CoAntiSymmetrize()

```
int CoAntiSymmetrize (  
    UBYTE * s )
```

Definition at line [2367](#) of file [compcomm.c](#).

4.9.2.53 CoCycleSymmetrize()

```
int CoCycleSymmetrize (  
    UBYTE * s )
```

Definition at line [2374](#) of file [compcomm.c](#).

4.9.2.54 CoRCycleSymmetrize()

```
int CoRCycleSymmetrize (  
    UBYTE * s )
```

Definition at line [2381](#) of file [compcomm.c](#).

4.9.2.55 CoWrite()

```
int CoWrite (  
    UBYTE * s )
```

Definition at line [2388](#) of file [compcomm.c](#).

4.9.2.56 CoNWrite()

```
int CoNWrite (  
    UBYTE * s )
```

Definition at line [2413](#) of file [compcomm.c](#).

4.9.2.57 CoRatio()

```
int CoRatio (  
    UBYTE * s )
```

Definition at line [2440](#) of file [compcomm.c](#).

4.9.2.58 CoRedefine()

```
int CoRedefine (
    UBYTE * s )
```

Definition at line [2480](#) of file [compcomm.c](#).

4.9.2.59 CoRenumber()

```
int CoRenumber (
    UBYTE * s )
```

Definition at line [2585](#) of file [compcomm.c](#).

4.9.2.60 CoSum()

```
int CoSum (
    UBYTE * s )
```

Definition at line [2606](#) of file [compcomm.c](#).

4.9.2.61 CoToTensor()

```
int CoToTensor (
    UBYTE * s )
```

Definition at line [2726](#) of file [compcomm.c](#).

4.9.2.62 CoToVector()

```
int CoToVector (
    UBYTE * s )
```

Definition at line [2894](#) of file [compcomm.c](#).

4.9.2.63 CoTrace4()

```
int CoTrace4 (
    UBYTE * s )
```

Definition at line [2964](#) of file [compcomm.c](#).

4.9.2.64 CoTraceN()

```
int CoTraceN (
    UBYTE * s )
```

Definition at line [3051](#) of file [compcomm.c](#).

4.9.2.65 CoChisholm()

```
int CoChisholm (
    UBYTE * s )
```

Definition at line 3111 of file [compcomm.c](#).

4.9.2.66 DoChain()

```
int DoChain (
    UBYTE * s,
    int option )
```

Definition at line 3193 of file [compcomm.c](#).

4.9.2.67 CoChainin()

```
int CoChainin (
    UBYTE * s )
```

Definition at line 3237 of file [compcomm.c](#).

4.9.2.68 CoChainout()

```
int CoChainout (
    UBYTE * s )
```

Definition at line 3249 of file [compcomm.c](#).

4.9.2.69 CoExit()

```
int CoExit (
    UBYTE * s )
```

Definition at line 3259 of file [compcomm.c](#).

4.9.2.70 CoInParallel()

```
int CoInParallel (
    UBYTE * s )
```

Definition at line 3286 of file [compcomm.c](#).

4.9.2.71 CoNotInParallel()

```
int CoNotInParallel (
    UBYTE * s )
```

Definition at line 3296 of file [compcomm.c](#).

4.9.2.72 DoInParallel()

```
int DoInParallel (
    UBYTE * s,
    int par )
```

Definition at line 3311 of file [compcomm.c](#).

4.9.2.73 CoInExpression()

```
int CoInExpression (
    UBYTE * s )
```

Definition at line 3380 of file [compcomm.c](#).

4.9.2.74 CoEndInExpression()

```
int CoEndInExpression (
    UBYTE * s )
```

Definition at line 3433 of file [compcomm.c](#).

4.9.2.75 CoSetExitFlag()

```
int CoSetExitFlag (
    UBYTE * s )
```

Definition at line 3459 of file [compcomm.c](#).

4.9.2.76 CoTryReplace()

```
int CoTryReplace (
    UBYTE * p )
```

Definition at line 3473 of file [compcomm.c](#).

4.9.2.77 CoModulus()

```
int CoModulus (
    UBYTE * inp )
```

Definition at line 3576 of file [compcomm.c](#).

4.9.2.78 CoRepeat()

```
int CoRepeat (
    UBYTE * inp )
```

Definition at line 3714 of file [compcomm.c](#).

4.9.2.79 CoEndRepeat()

```
int CoEndRepeat (
    UBYTE * inp )
```

Definition at line [3737](#) of file [compcomm.c](#).

4.9.2.80 DoBrackets()

```
int DoBrackets (
    UBYTE * inp,
    int par )
```

Definition at line [3775](#) of file [compcomm.c](#).

4.9.2.81 CoBracket()

```
int CoBracket (
    UBYTE * inp )
```

Definition at line [3902](#) of file [compcomm.c](#).

4.9.2.82 CoAntiBracket()

```
int CoAntiBracket (
    UBYTE * inp )
```

Definition at line [3910](#) of file [compcomm.c](#).

4.9.2.83 CoMultiBracket()

```
int CoMultiBracket (
    UBYTE * inp )
```

Definition at line [3921](#) of file [compcomm.c](#).

4.9.2.84 CountComp()

```
WORD * CountComp (
    UBYTE * inp,
    WORD * to )
```

Definition at line [4053](#) of file [compcomm.c](#).

4.9.2.85 Colf()

```
int CoIf (
    UBYTE * inp )
```

Definition at line [4243](#) of file [compcomm.c](#).

4.9.2.86 CoElse()

```
int CoElse (
    UBYTE * p )
```

Definition at line 4883 of file [compcomm.c](#).

4.9.2.87 CoElseIf()

```
int CoElseIf (
    UBYTE * inp )
```

Definition at line 4910 of file [compcomm.c](#).

4.9.2.88 CoEndIf()

```
int CoEndIf (
    UBYTE * inp )
```

Definition at line 4937 of file [compcomm.c](#).

4.9.2.89 CoWhile()

```
int CoWhile (
    UBYTE * inp )
```

Definition at line 4982 of file [compcomm.c](#).

4.9.2.90 CoEndWhile()

```
int CoEndWhile (
    UBYTE * inp )
```

Definition at line 5003 of file [compcomm.c](#).

4.9.2.91 DoFindLoop()

```
int DoFindLoop (
    UBYTE * inp,
    int mode )
```

Definition at line 5031 of file [compcomm.c](#).

4.9.2.92 CoFindLoop()

```
int CoFindLoop (
    UBYTE * inp )
```

Definition at line 5148 of file [compcomm.c](#).

4.9.2.93 CoReplaceLoop()

```
int CoReplaceLoop (
    UBYTE * inp )
```

Definition at line [5156](#) of file [compcomm.c](#).

4.9.2.94 CoFunPowers()

```
int CoFunPowers (
    UBYTE * inp )
```

Definition at line [5176](#) of file [compcomm.c](#).

4.9.2.95 CoUnitTrace()

```
int CoUnitTrace (
    UBYTE * s )
```

Definition at line [5203](#) of file [compcomm.c](#).

4.9.2.96 CoTerm()

```
int CoTerm (
    UBYTE * s )
```

Definition at line [5238](#) of file [compcomm.c](#).

4.9.2.97 CoEndTerm()

```
int CoEndTerm (
    UBYTE * s )
```

Definition at line [5286](#) of file [compcomm.c](#).

4.9.2.98 CoSort()

```
int CoSort (
    UBYTE * s )
```

Definition at line [5313](#) of file [compcomm.c](#).

4.9.2.99 CoPolyFun()

```
int CoPolyFun (
    UBYTE * s )
```

Definition at line [5352](#) of file [compcomm.c](#).

4.9.2.100 CoPolyRatFun()

```
int CoPolyRatFun (
    UBYTE * s )
```

Definition at line 5399 of file [compcomm.c](#).

4.9.2.101 CoMerge()

```
int CoMerge (
    UBYTE * inp )
```

Definition at line 5569 of file [compcomm.c](#).

4.9.2.102 CoStuffle()

```
int CoStuffle (
    UBYTE * inp )
```

Definition at line 5625 of file [compcomm.c](#).

4.9.2.103 CoProcessBucket()

```
int CoProcessBucket (
    UBYTE * s )
```

Definition at line 5680 of file [compcomm.c](#).

4.9.2.104 CoThreadBucket()

```
int CoThreadBucket (
    UBYTE * s )
```

Definition at line 5698 of file [compcomm.c](#).

4.9.2.105 DoArgPlode()

```
int DoArgPlode (
    UBYTE * s,
    int par )
```

Definition at line 5728 of file [compcomm.c](#).

4.9.2.106 CoArgExplode()

```
int CoArgExplode (
    UBYTE * s )
```

Definition at line 5784 of file [compcomm.c](#).

4.9.2.107 CoArgImplode()

```
int CoArgImplode (
    UBYTE * s )
```

Definition at line 5791 of file [compcomm.c](#).

4.9.2.108 CoClearTable()

```
int CoClearTable (
    UBYTE * s )
```

Definition at line 5798 of file [compcomm.c](#).

4.9.2.109 CoDenominators()

```
int CoDenominators (
    UBYTE * s )
```

Definition at line 5880 of file [compcomm.c](#).

4.9.2.110 CoDropCoefficient()

```
int CoDropCoefficient (
    UBYTE * s )
```

Definition at line 5909 of file [compcomm.c](#).

4.9.2.111 CoDropSymbols()

```
int CoDropSymbols (
    UBYTE * s )
```

Definition at line 5923 of file [compcomm.c](#).

4.9.2.112 CoToPolynomial()

```
int CoToPolynomial (
    UBYTE * inp )
```

Definition at line 5946 of file [compcomm.c](#).

4.9.2.113 CoFromPolynomial()

```
int CoFromPolynomial (
    UBYTE * inp )
```

Definition at line 6021 of file [compcomm.c](#).

4.9.2.114 CoArgToExtraSymbol()

```
int CoArgToExtraSymbol (
    UBYTE * s )
```

Definition at line [6047](#) of file [compcomm.c](#).

4.9.2.115 CoExtraSymbols()

```
int CoExtraSymbols (
    UBYTE * inp )
```

Definition at line [6097](#) of file [compcomm.c](#).

4.9.2.116 GetIfDollarFactor()

```
WORD * GetIfDollarFactor (
    UBYTE ** inp,
    WORD * w )
```

Definition at line [6170](#) of file [compcomm.c](#).

4.9.2.117 GetDoParam()

```
UBYTE * GetDoParam (
    UBYTE * inp,
    WORD ** wp,
    int par )
```

Definition at line [6228](#) of file [compcomm.c](#).

4.9.2.118 CoDo()

```
int CoDo (
    UBYTE * inp )
```

Definition at line [6305](#) of file [compcomm.c](#).

4.9.2.119 CoEndDo()

```
int CoEndDo (
    UBYTE * inp )
```

Definition at line [6408](#) of file [compcomm.c](#).

4.9.2.120 CoFactDollar()

```
int CoFactDollar (
    UBYTE * inp )
```

Definition at line 6439 of file [compcomm.c](#).

4.9.2.121 CoFactorize()

```
int CoFactorize (
    UBYTE * s )
```

Definition at line 6468 of file [compcomm.c](#).

4.9.2.122 CoNFactorize()

```
int CoNFactorize (
    UBYTE * s )
```

Definition at line 6475 of file [compcomm.c](#).

4.9.2.123 CoUnFactorize()

```
int CoUnFactorize (
    UBYTE * s )
```

Definition at line 6482 of file [compcomm.c](#).

4.9.2.124 CoNUnFactorize()

```
int CoNUnFactorize (
    UBYTE * s )
```

Definition at line 6489 of file [compcomm.c](#).

4.9.2.125 DoFactorize()

```
int DoFactorize (
    UBYTE * s,
    int par )
```

Definition at line 6496 of file [compcomm.c](#).

4.9.2.126 CoOptimizeOption()

```
int CoOptimizeOption (
    UBYTE * s )
```

Definition at line 6629 of file [compcomm.c](#).

4.9.2.127 CoPutInside()

```
int CoPutInside (
    UBYTE * inp )
```

Definition at line 7065 of file [compcomm.c](#).

4.9.2.128 CoAntiPutInside()

```
int CoAntiPutInside (
    UBYTE * inp )
```

Definition at line 7066 of file [compcomm.c](#).

4.9.2.129 DoPutInside()

```
int DoPutInside (
    UBYTE * inp,
    int par )
```

Definition at line 7068 of file [compcomm.c](#).

4.9.2.130 CoSwitch()

```
int CoSwitch (
    UBYTE * s )
```

Definition at line 7188 of file [compcomm.c](#).

4.9.2.131 CoCase()

```
int CoCase (
    UBYTE * s )
```

Definition at line 7234 of file [compcomm.c](#).

4.9.2.132 CoBreak()

```
int CoBreak (
    UBYTE * s )
```

Definition at line 7284 of file [compcomm.c](#).

4.9.2.133 CoDefault()

```
int CoDefault (
    UBYTE * s )
```

Definition at line 7310 of file [compcomm.c](#).

4.9.2.134 CoEndSwitch()

```
int CoEndSwitch (
    UBYTE * s )
```

Definition at line 7337 of file [compcomm.c](#).

4.9.2.135 CoSetUserFlag()

```
int CoSetUserFlag (
    UBYTE * s )
```

Definition at line 7405 of file [compcomm.c](#).

4.9.2.136 CoClearUserFlag()

```
int CoClearUserFlag (
    UBYTE * s )
```

Definition at line 7433 of file [compcomm.c](#).

4.9.2.137 CoCreateAllLoops()

```
int CoCreateAllLoops (
    UBYTE * s )
```

Definition at line 7470 of file [compcomm.c](#).

4.9.2.138 CoCreateAllPaths()

```
int CoCreateAllPaths (
    UBYTE * s )
```

Definition at line 7590 of file [compcomm.c](#).

4.9.2.139 CoCreateAll()

```
int CoCreateAll (
    UBYTE * s )
```

Definition at line 7718 of file [compcomm.c](#).

4.10 compcomm.c

[Go to the documentation of this file.](#)

```

00001
00010 /* #[] License : */
00011 /*
00012 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00013 *   When using this file you are requested to refer to the publication
00014 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00015 *   This is considered a matter of courtesy as the development was paid
00016 *   for by FOM the Dutch physics granting agency and we would like to
00017 *   be able to track its scientific use to convince FOM of its value
00018 *   for the community.
00019 *
00020 *   This file is part of FORM.
00021 *
00022 *   FORM is free software: you can redistribute it and/or modify it under the
00023 *   terms of the GNU General Public License as published by the Free Software
00024 *   Foundation, either version 3 of the License, or (at your option) any later
00025 *   version.
00026 *
00027 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00028 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00029 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00030 *   details.
00031 *
00032 *   You should have received a copy of the GNU General Public License along
00033 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00034 */
00035 /* #[] License : */
00036 /*
00037 *   #[] includes :
00038 */
00039
00040 #include "form3.h"
00041 #include "comtool.h"
00042 #ifdef WITHFLOAT
00043 #include <gmp.h>
00044 #include <math.h>
00045 #endif
00046
00047 static KEYWORD formatoptions[] = {
00048     {"allfloat",      (TFUN)0,    ALLINTEGERDOUBLE, 0}
00049     ,{"c",            (TFUN)0,    CMODE,             0}
00050     ,{"doublefortran", (TFUN)0,    DOUBLEFORTRANMODE, 0}
00051     ,{"float",        (TFUN)0,    0,                 2}
00052 #ifdef WITHFLOAT
00053     ,{"floatprecision", (TFUN)0,    0,                 5}
00054 #endif
00055     ,{"fortran",      (TFUN)0,    FORTRANMODE,        0}
00056     ,{"fortran90",    (TFUN)0,    FORTRANMODE,        4}
00057     ,{"maple",        (TFUN)0,    MAPLEMODE,          0}
00058     ,{"mathematica",  (TFUN)0,    MATHEMATICAMODE,    0}
00059     ,{"normal",       (TFUN)0,    NORMALFORMAT,       1}
00060     ,{"nospaces",     (TFUN)0,    NOSPACEFORMAT,      3}
00061     ,{"pfortran",     (TFUN)0,    PFORTRANMODE,       0}
00062     ,{"quadfortran",  (TFUN)0,    QUADRUPLEFORTRANMODE, 0}
00063     ,{"quadruplefortran", (TFUN)0,    QUADRUPLEFORTRANMODE, 0}
00064     ,{"rational",     (TFUN)0,    RATIONALMODE,       1}
00065     ,{"reduce",       (TFUN)0,    REDUCEMODE,         0}
00066     ,{"spaces",       (TFUN)0,    NORMALFORMAT,       3}
00067     ,{"vortran",      (TFUN)0,    VORTRANMODE,        0}
00068 };
00069
00070 static KEYWORD trace4options[] = {
00071     {"contract",      (TFUN)0,    CHISHOLM,           0 }
00072     ,{"nocontract",   (TFUN)0,    0,                  CHISHOLM }
00073     ,{"nosymmetrize", (TFUN)0,    0,                  ALSOREVERSE}
00074     ,{"notrick",      (TFUN)0,    NOTRICK,            0 }
00075     ,{"symmetrize",   (TFUN)0,    ALSOREVERSE,        0 }
00076     ,{"trick",        (TFUN)0,    0,                  NOTRICK }
00077 };
00078
00079 static KEYWORD chisoptions[] = {
00080     {"nosymmetrize", (TFUN)0,    0,                  ALSOREVERSE}
00081     ,{"symmetrize",  (TFUN)0,    ALSOREVERSE,        0 }
00082 };
00083
00084 static KEYWORDV writeoptions[] = {
00085     {"stats",         &(AC.StatsFlag), 1, 0}
00086     ,{"statistics",   &(AC.StatsFlag), 1, 0}
00087     ,{"shortstats",    &(AC.ShortStats), 1, 0}
00088     ,{"shortstatistics",&(AC.ShortStats), 1, 0}
00089     ,{"warnings",     &(AC.WarnFlag), 1, 0}
00090     ,{"allwarnings",   &(AC.WarnFlag), 2, 0}

```

```

00091     ,{"setup",          &(AC.SetupFlag),    1,      0}
00092     ,{"names",         &(AC.NamesFlag),    1,      0}
00093     ,{"allnames",      &(AC.NamesFlag),    2,      0}
00094     ,{"codes",         &(AC.CodesFlag),    1,      0}
00095     ,{"highfirst",     &(AC.SortType),    SORTHIGHFIRST,  SORTLOWFIRST}
00096     ,{"lowfirst",      &(AC.SortType),    SORTLOWFIRST,   SORTHIGHFIRST}
00097     ,{"powerfirst",    &(AC.SortType),    SORTPOWERFIRST, SORTHIGHFIRST}
00098     ,{"tokens",        &(AC.TokensWriteFlag),1,      0}
00099 };
00100
00101 static KEYWORDV onoffoptions[] = {
00102     {"compress",       &(AC.NoCompress),   0,      1}
00103     ,{"checkpoint",    &(AC.CheckpointFlag), 1,      0}
00104     ,{"insidefirst",   &(AC.insidefirst), 1,      0}
00105     ,{"propercount",   &(AC.BottomLevel), 1,      0}
00106     ,{"stats",         &(AC.StatsFlag),    1,      0}
00107     ,{"statistics",    &(AC.StatsFlag),    1,      0}
00108     ,{"shortstats",    &(AC.ShortStats),   1,      0}
00109     ,{"shortstatistics",&(AC.ShortStats),   1,      0}
00110     ,{"names",         &(AC.NamesFlag),    1,      0}
00111     ,{"allnames",      &(AC.NamesFlag),    2,      0}
00112     ,{"warnings",      &(AC.WarnFlag),    1,      0}
00113     ,{"allwarnings",   &(AC.WarnFlag),    2,      0}
00114     ,{"highfirst",     &(AC.SortType),    SORTHIGHFIRST,  SORTLOWFIRST}
00115     ,{"lowfirst",      &(AC.SortType),    SORTLOWFIRST,   SORTHIGHFIRST}
00116     ,{"powerfirst",    &(AC.SortType),    SORTPOWERFIRST, SORTHIGHFIRST}
00117     ,{"setup",         &(AC.SetupFlag),    1,      0}
00118     ,{"codes",         &(AC.CodesFlag),    1,      0}
00119     ,{"tokens",        &(AC.TokensWriteFlag),1,      0}
00120     ,{"properorder",   &(AC.properorderflag),1,0}
00121     ,{"threadloadbalancing",&(AC.ThreadBalancing),1, 0}
00122     ,{"threads",       &(AC.ThreadsFlag),1, 0}
00123     ,{"threadsortfilesynch",&(AC.ThreadSortFileSynch),1, 0}
00124     ,{"threadstats",   &(AC.ThreadStats),1, 0}
00125     ,{"finalstats",    &(AC.FinalStats),1, 0}
00126     ,{"fewerstats",    &(AC.ShortStatsMax), 10, 0}
00127     ,{"fewerstatistics",&(AC.ShortStatsMax), 10, 0}
00128     ,{"processstats",  &(AC.ProcessStats),1, 0}
00129     ,{"oldparallelstats",&(AC.OldParallelStats),1,0}
00130     ,{"parallel",      &(AC.parallelflag),PARALLELF,NOPARALLEL_USER}
00131     ,{"nospacesinnnumbers",&(AO.NoSpacesInNumbers),1,0}
00132     ,{"indentSPACE",   &(AO.IndentSpace),INDENTSPACE,0}
00133     ,{"totalsize",      &(AM.PrintTotalSize), 1, 0}
00134     ,{"flag",          (int *)&(AC.debugFlags), 1, 0}
00135     ,{"oldfactarg",    &(AC.OldFactArgFlag), 1, 0}
00136     ,{"memdebugflag",  &(AC.MemDebugFlag), 1, 0}
00137     ,{"oldgcd",        &(AC.OldGCDflag), 1, 0}
00138     ,{"innertest",     &(AC.InnerTest), 1, 0}
00139     ,{"wtimestats",    &(AC.WTimeStatsFlag), 1, 0}
00140     ,{"sortreallocate",&(AC.SortReallocateFlag), 1, 0}
00141     ,{"backtrace",     &(AC.PrintBacktraceFlag), 1, 0}
00142     ,{"flint",         &(AC.FlintPolyFlag), 1, 0}
00143     ,{"humanstats",    &(AC.HumanStatsFlag), 1, 0}
00144     ,{"humanstatistics",&(AC.HumanStatsFlag), 1, 0}
00145 };
00146
00147 static WORD one = 1;
00148
00149 /*
00150     #] includes :
00151     #[ CoFormat :
00152 */
00153
00154 int CoFormat(UBYTE *s)
00155 {
00156     int error = 0, x;
00157     KEYWORD *key;
00158     UBYTE *ss;
00159     while ( *s == ' ' || *s == ',' ) s++;
00160     if ( *s == 0 ) {
00161         AC.OutputMode = 72;
00162         AC.OutputSpaces = NORMALFORMAT;
00163         return(error);
00164     }
00165     /*
00166     First the optimization level
00167     */
00168     if ( *s == 'O' || *s == 'o' ) {
00169         if ( ( FG.cTable[s[1]] == 1 ) ||
00170              ( s[1] == '=' && FG.cTable[s[2]] == 1 ) ) {
00171             s++; if ( *s == '=' ) s++;
00172             x = 0;
00173             while ( *s >= '0' && *s <= '9' ) x = 10*x + *s++ - '0';
00174             while ( *s == ',' ) s++;
00175             AO.OptimizationLevel = x;
00176             AO.Optimize.greedytimelimit = 0;
00177             AO.Optimize.mctsttimelimit = 0;

```

```

00178         AO.Optimize.printstats = 0;
00179         AO.Optimize.debugflags = 0;
00180         AO.Optimize.schemeflags = 0;
00181         AO.Optimize.mctsdecaymode = 1; /* default is decreasing C_p with iteration number */
00182         if ( AO.inscheme ) {
00183             M_free(AO.inscheme,"Horner input scheme");
00184             AO.inscheme = 0; AO.schemenum = 0;
00185         }
00186         switch ( x ) {
00187             case 0:
00188                 break;
00189             case 1:
00190                 AO.Optimize.mctsconstant.fval = -1.0;
00191                 AO.Optimize.horner = O_OCCURRENCE;
00192                 AO.Optimize.hornerdirection = O_FORWARDORBACKWARD;
00193                 AO.Optimize.method = O_CSE;
00194                 break;
00195             case 2:
00196                 AO.Optimize.horner = O_OCCURRENCE;
00197                 AO.Optimize.hornerdirection = O_FORWARDORBACKWARD;
00198                 AO.Optimize.method = O_GREEDY;
00199                 AO.Optimize.greedyminnum = 10;
00200                 AO.Optimize.greedymaxperc = 5;
00201                 break;
00202             case 3:
00203                 AO.Optimize.mctsconstant.fval = 1.0;
00204                 AO.Optimize.horner = O_MCTS;
00205                 AO.Optimize.hornerdirection = O_FORWARDORBACKWARD;
00206                 AO.Optimize.method = O_GREEDY;
00207                 AO.Optimize.mctsnumexpand = 1000;
00208                 AO.Optimize.mctsnumkeep = 10;
00209                 AO.Optimize.mctsnumrepeat = 1;
00210                 AO.Optimize.greedyminnum = 10;
00211                 AO.Optimize.greedymaxperc = 5;
00212                 break;
00213             case 4:
00214                 AO.Optimize.horner = O_SIMULATED_ANNEALING;
00215                 AO.Optimize.saIter = 1000;
00216                 AO.Optimize.saMaxT.fval = 2000;
00217                 AO.Optimize.saMinT.fval = 1;
00218                 break;
00219             default:
00220                 error = 1;
00221                 MesPrint("&Illegal optimization specification in format statement");
00222                 break;
00223         }
00224         if ( error == 0 && *s != 0 && x > 0 ) return(CoOptimizeOption(s));
00225         return(error);
00226     }
00227 #ifdef EXPOPT
00228     { UBYTE c;
00229       ss = s;
00230       while ( FG.cTable[*s] == 0 ) s++;
00231       c = *s; *s = 0;
00232       if ( StrICont(ss, (UBYTE *) "optimize") == 0 ) {
00233           *s = c;
00234           while ( *s == ',' ) s++;
00235           if ( *s == '=' ) s++;
00236           AO.OptimizationLevel = 3;
00237           AO.Optimize.mctsconstant.fval = 1.0;
00238           AO.Optimize.horner = O_MCTS;
00239           AO.Optimize.hornerdirection = O_FORWARDORBACKWARD;
00240           AO.Optimize.method = O_GREEDY;
00241           AO.Optimize.mctstimelimit = 0;
00242           AO.Optimize.mctsnumexpand = 1000;
00243           AO.Optimize.mctsnumkeep = 10;
00244           AO.Optimize.mctsnumrepeat = 1;
00245           AO.Optimize.greedytimelimit = 0;
00246           AO.Optimize.greedyminnum = 10;
00247           AO.Optimize.greedymaxperc = 5;
00248           AO.Optimize.printstats = 0;
00249           AO.Optimize.debugflags = 0;
00250           AO.Optimize.schemeflags = 0;
00251           AO.Optimize.mctsdecaymode = 1;
00252           if ( AO.inscheme ) {
00253               M_free(AO.inscheme,"Horner input scheme");
00254               AO.inscheme = 0; AO.schemenum = 0;
00255           }
00256           return(CoOptimizeOption(s));
00257       }
00258       else {
00259           error = 1;
00260           MesPrint("&Illegal optimization specification in format statement");
00261           return(error);
00262       }
00263     }
00264 #endif

```

```

00265     }
00266     else if ( FG.cTable[*s] == 1 ) {
00267         x = 0;
00268         while ( FG.cTable[*s] == 1 ) x = 10*x + *s++ - '0';
00269         if ( x <= 0 || x >= MAXLINELENGTH ) {
00270             error = 1;
00271             MesPrint("&Illegal value for linesize: %d",x);
00272             x = 72;
00273         }
00274         if ( x < 39 ) {
00275             MesPrint(" ... Too small value for linesize corrected to 39");
00276             x = 39;
00277         }
00278         AO.DoubleFlag = 0;
00279     /*
00280         The next line resets the mode to normal. Because the special modes
00281         reset the line length we have a little problem with the special modes
00282         and customized line length. We try to improve by removing the next line
00283     */
00284     /*
00285         AC.OutputMode = 0; */
00286         AC.LineLength = x;
00287         if ( *s != 0 ) {
00288             error = 1;
00289             MesPrint("&Illegal linesize field in format statement");
00290         }
00291     else {
00292         key = FindKeyWord(s,formatoptions,
00293             sizeof(formatoptions)/sizeof(KEYWORD));
00294         if ( key ) {
00295             if ( key->type == FORTRANMODE || key->type == PFORTRANMODE || key->type ==
00296                 DOUBLEFORTRANMODE
00297                 || key->type == QUADRUPLEFORTRANMODE || key->type == VORTRANMODE ) {
00298                 if ( AC.LineLength > 72 ) AC.LineLength = 72;
00299             }
00300             if ( key->flags == 0 ) {
00301                 if ( key->type == FORTRANMODE || key->type == PFORTRANMODE
00302                     || key->type == DOUBLEFORTRANMODE || key->type == ALLINTEGERDOUBLE
00303                     || key->type == QUADRUPLEFORTRANMODE || key->type == VORTRANMODE ) {
00304                     AC.IsFortran90 = ISNOTFORTRAN90;
00305                     if ( AC.Fortran90Kind ) {
00306                         M_free(AC.Fortran90Kind,"Fortran90 Kind");
00307                         AC.Fortran90Kind = 0;
00308                     }
00309                     if ( ( key->type == ALLINTEGERDOUBLE ) && AO.DoubleFlag != 0 ) {
00310                         AO.DoubleFlag |= 4;
00311                     }
00312                     else {
00313                         AO.DoubleFlag = 0;
00314                         AC.OutputMode = key->type & NODOUBLEMASK;
00315                         if ( ( key->type & DOUBLEPRECISIONFLAG ) != 0 ) {
00316                             AO.DoubleFlag = 1;
00317                         }
00318                         else if ( ( key->type & QUADRUPLEPRECISIONFLAG ) != 0 ) {
00319                             AO.DoubleFlag = 2;
00320                         }
00321                     }
00322                 }
00323             else if ( key->flags == 1 ) {
00324                 AC.OutputMode = AC.OutNumberType = key->type;
00325             }
00326             else if ( key->flags == 2 ) {
00327                 while ( FG.cTable[*s] == 0 ) s++;
00328                 if ( *s == 0 ) AC.OutNumberType = 10;
00329                 else if ( *s == ',' ) {
00330                     s++;
00331                     x = 0;
00332                     while ( FG.cTable[*s] == 1 ) x = 10*x + *s++ - '0';
00333                     if ( *s != 0 ) {
00334                         error = 1;
00335                         MesPrint("&Illegal float format specifier");
00336                     }
00337                     else {
00338                         if ( x < 3 ) {
00339                             x = 3;
00340                             MesPrint("& ... float format value corrected to 3");
00341                         }
00342                         if ( x > 100 ) {
00343                             x = 100;
00344                             MesPrint("& ... float format value corrected to 100");
00345                         }
00346                         AC.OutNumberType = x;
00347                     }
00348                 }
00349             }
00350             else if ( key->flags == 3 ) {

```

```

00351         AC.OutputSpaces = key->type;
00352     }
00353     else if ( key->flags == 4 ) {
00354         AC.IsFortran90 = ISFORTRAN90;
00355         if ( AC.Fortran90Kind ) {
00356             M_free(AC.Fortran90Kind,"Fortran90 Kind");
00357             AC.Fortran90Kind = 0;
00358         }
00359         while ( FG.cTable[*s] <= 1 ) s++;
00360         if ( *s == ',' ) {
00361             s++; ss = s;
00362             while ( *ss && *ss != ',' ) ss++;
00363             if ( *ss == ',' ) {
00364                 MesPrint("&No white space or comma's allowed in Fortran90 option: %s",s);
00365                 error = 1;
00366             }
00367             else {
00368                 AC.Fortran90Kind = strDup1(s,"Fortran90 Kind");
00369             }
00370             AO.DoubleFlag = 0;
00371             AC.OutputMode = key->type & NODOUBLEMASK;
00372         }
00373 #ifdef WITHFLOAT
00374         else if ( key->flags == 5 ) {
00375             /*
00376                 Syntax: Format FloatPrecision [precision];
00377                     Format FloatPrecision off;
00378             */
00379             while ( FG.cTable[*s] == 0 ) s++;
00380             while ( *s == ' ' || *s == '\t' || *s == ',' ) s++;
00381             if ( *s == 0 ) {
00382                 AO.FloatPrec = 0;
00383             }
00384             else if ( tolower(*s) == 'o' && tolower(s[1]) == 'f'
00385                 && tolower(s[2]) == 'f' ) {
00386                 ss = s;
00387                 s += 3;
00388                 while ( *s == ' ' || *s == '\t' || *s == ',' ) s++;
00389                 if ( *s ) { s = ss; goto WrongOption; }
00390                 AO.FloatPrec = -1;
00391             }
00392             else if ( FG.cTable[*s] == 1 ) {
00393                 ss = s;
00394                 ParseNumber(AO.FloatPrec,s)
00395             /*
00396                 The precision can either be in digits or bits.
00397                 AO.FloatPrec is in digits.
00398             */
00399             if ( tolower(*s) == 'd' ) { s++; }
00400             else if ( tolower(*s) == 'b' ) { AO.FloatPrec = AO.FloatPrec*log10(2.0); s++; }
00401             else { s = ss; goto WrongOption; }
00402             while ( *s == ' ' || *s == '\t' || *s == ',' ) s++;
00403             if ( *s ) { s = ss; goto WrongOption; }
00404         }
00405         else {
00406 WrongOption: MesPrint("&Illegal option in Format FloatPrecision: %s",s);
00407                 error = 1;
00408             }
00409         }
00410 #endif
00411     }
00412     else if ( ( *s == 'c' || *s == 'C' ) && ( FG.cTable[s[1]] == 1 ) ) {
00413         UBYTE *ss = s+1;
00414         WORD x = 0;
00415         while ( *ss >= '0' && *ss <= '9' ) x = 10*x + *ss++ - '0';
00416         if ( *ss != 0 ) goto Unknown;
00417         AC.OutputMode = CMODE;
00418         AC.Cnumpows = x;
00419     }
00420     else {
00421 Unknown: MesPrint("&Unknown option: %s",s); error = 1;
00422     }
00423 }
00424 return(error);
00425 }
00426
00427 /*
00428 #] CoFormat :
00429 #[ CoCollect :
00430
00431 Collect,functionname
00432 */
00433
00434 int CoCollect (UBYTE *s)
00435 {
00436 /* -----change 17-feb-2003 Added percentage */

```

```

00437     WORD numfun;
00438     int type,x = 0;
00439     UBYTE *t = SkipAName(s), *t1, *t2;
00440     AC.AltCollectFun = 0;
00441     if ( t == 0 ) goto syntaxerror;
00442     t1 = t; while ( *t1 == ',' || *t1 == ' ' || *t1 == '\t' ) t1++;
00443     *t = 0; t = t1;
00444     if ( *t1 && ( FG.cTable[*t1] == 0 || *t1 == '[' ) ) {
00445         t2 = SkipAName(t1);
00446         if ( t2 == 0 ) goto syntaxerror;
00447         t = t2;
00448         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
00449         *t2 = 0;
00450     }
00451     else t1 = 0;
00452     if ( *t && FG.cTable[*t] == 1 ) {
00453         while ( *t >= '0' && *t <= '9' ) x = 10*x + *t++ - '0';
00454         if ( x > 100 ) x = 100;
00455         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
00456         if ( *t ) goto syntaxerror;
00457     }
00458     else {
00459         if ( *t ) goto syntaxerror;
00460         x = 100;
00461     }
00462     if ( ( ( type = GetName(AC.varnames,s,&numfun,WITHAUTO) ) != CFUNCTION )
00463     || ( functions[numfun].spec != 0 ) ) {
00464         MesPrint("%s should be a regular function",s);
00465         if ( type < 0 ) {
00466             if ( GetName(AC.exprnames,s,&numfun,NOAUTO) == NAMENOTFOUND )
00467                 AddFunction(s,0,0,0,0,0,-1,-1);
00468         }
00469         return(1);
00470     }
00471     AC.CollectFun = numfun+FUNCTION;
00472     AC.CollectPercentage = (WORD)x;
00473     if ( t1 ) {
00474         if ( ( ( type = GetName(AC.varnames,t1,&numfun,WITHAUTO) ) != CFUNCTION )
00475         || ( functions[numfun].spec != 0 ) ) {
00476             MesPrint("%s should be a regular function",t1);
00477             if ( type < 0 ) {
00478                 if ( GetName(AC.exprnames,t1,&numfun,NOAUTO) == NAMENOTFOUND )
00479                     AddFunction(t1,0,0,0,0,0,-1,-1);
00480             }
00481             return(1);
00482         }
00483         AC.AltCollectFun = numfun+FUNCTION;
00484     }
00485     return(0);
00486 syntaxerror:
00487     MesPrint("&Collect statement needs one or two functions (and a percentage) for its argument(s)");
00488     return(1);
00489 }
00490
00491 /*
00492  #] CoCollect :
00493  #[ setonoff :
00494 */
00495
00496 int setonoff(UBYTE *s, int *flag, int onvalue, int offvalue)
00497 {
00498     if ( StrICmp(s,(UBYTE *)"on") == 0 ) *flag = onvalue;
00499     else if ( StrICmp(s,(UBYTE *)"off") == 0 ) *flag = offvalue;
00500     else {
00501         MesPrint("&Unknown option: %s, on or off expected",s);
00502         return(1);
00503     }
00504     return(0);
00505 }
00506
00507 /*
00508  #] setonoff :
00509  #[ CoCompress :
00510 */
00511
00512 int CoCompress(UBYTE *s)
00513 {
00514     GETIDENTITY
00515     UBYTE *t, c;
00516     if ( StrICmp(s,(UBYTE *)"on") == 0 ) {
00517         AC.NoCompress = 0;
00518         AR.gzipCompress = 0;
00519     }
00520     else if ( StrICmp(s,(UBYTE *)"off") == 0 ) {
00521         AC.NoCompress = 1;
00522         AR.gzipCompress = 0;
00523     }

```



```

00524     else {
00525         t = s; while ( FG.cTable[*t] <= 1 ) t++;
00526         c = *t; *t = 0;
00527         if ( StrICmp(s, (UBYTE *) "gzip") == 0 ) {
00528             #ifndef WITHZLIB
00529                 Warning("gzip compression not supported on this platform");
00530             #endif
00531             s = t; *s = c;
00532             if ( *s == 0 ) {
00533                 AR.gzipCompress = GZIPDEFAULT; /* Normally should be 6 */
00534                 return(0);
00535             }
00536             while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00537             t = s;
00538             if ( FG.cTable[*s] == 1 ) {
00539                 AR.gzipCompress = *s - '0';
00540                 s++;
00541                 while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00542                 if ( *s == 0 ) return(0);
00543             }
00544             MesPrint("&Unknown gzip option: %s, a digit was expected",t);
00545             return(1);
00546         }
00547     }
00548     else {
00549         MesPrint("&Unknown option: %s, on, off or gzip expected",s);
00550         return(1);
00551     }
00552 }
00553 return(0);
00554 }
00555
00556 /*
00557  #] CoCompress :
00558  #[ CoFlags :
00559  */
00560
00561 int CoFlags(UBYTE *s,int value)
00562 {
00563     int i, error = 0;
00564     if ( *s != ',' ) {
00565         MesPrint("&Proper syntax is: On/Off Flag,number[s];");
00566         error = 1;
00567     }
00568     while ( *s == ',' ) {
00569         do { s++; } while ( *s == ',' );
00570         i = 0;
00571         if ( FG.cTable[*s] != 1 ) {
00572             MesPrint("&Proper syntax is: On/Off Flag,number[s];");
00573             error = 1;
00574             break;
00575         }
00576         while ( FG.cTable[*s] == 1 ) { i = 10*i + *s++ - '0'; }
00577         if ( i <= 0 || i > MAXFLAGS ) {
00578             MesPrint("&The number of a flag in On/Off Flag should be in the range
00579 0-%d", (int)MAXFLAGS);
00580             error = 1;
00581             break;
00582         }
00583         AC.debugFlags[i] = value;
00584     }
00585     if ( *s ) {
00586         MesPrint("&Proper syntax is: On/Off Flag,number[s];");
00587         error = 1;
00588     }
00589     return(error);
00590 }
00591
00592 /*
00593  #] CoFlags :
00594  #[ CoOff :
00595  */
00596
00597 int CoOff(UBYTE *s)
00598 {
00599     GETIDENTITY
00600     UBYTE *t, c;
00601     int i, num = sizeof(onoffoptions)/sizeof(KEYWORD);
00602     for (;;) {
00603         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00604         if ( *s == 0 ) return(0);
00605         if ( chartype[*s] != 0 ) {
00606             MesPrint("&Illegal character or option encountered in OFF statement");
00607             return(-1);
00608         }
00609         t = s; while ( chartype[*s] == 0 ) s++;
00610         c = *s; *s = 0;

```

```

00610         for ( i = 0; i < num; i++ ) {
00611             if ( StrICont(t, (UBYTE *) (onoffoptions[i].name)) == 0 ) break;
00612         }
00613         if ( i >= num ) {
00614             MesPrint("&Unrecognized option in OFF statement: %s", t);
00615             *s = c; return(-1);
00616         }
00617         else if ( StrICont(t, (UBYTE *) "compress") == 0 ) {
00618             AR.zipCompress = 0;
00619         }
00620         else if ( StrICont(t, (UBYTE *) "checkpoint") == 0 ) {
00621             PrintDeprecation("the checkpoint mechanism", "issues/626");
00622             AC.CheckpointInterval = 0;
00623             if ( AC.CheckpointRunBefore ) { free(AC.CheckpointRunBefore); AC.CheckpointRunBefore =
NULL; }
00624             if ( AC.CheckpointRunAfter ) { free(AC.CheckpointRunAfter); AC.CheckpointRunAfter = NULL;
}
00625             if ( AC.NoShowInput == 0 ) MesPrint("Checkpoints deactivated.");
00626         }
00627         else if ( StrICont(t, (UBYTE *) "threads") == 0 ) {
00628             AS.MultiThreaded = 0;
00629         }
00630         else if ( StrICont(t, (UBYTE *) "flag") == 0 ) {
00631             *s = c;
00632             return(CoFlags(s, 0));
00633         }
00634         else if ( StrICont(t, (UBYTE *) "innertest") == 0 ) {
00635             *s = c;
00636             AC.InnerTest = 0;
00637             if ( AC.TestValue ) {
00638                 M_free(AC.TestValue, "InnerTest");
00639                 AC.TestValue = 0;
00640             }
00641         }
00642         else if ( StrICont(t, (UBYTE *) "sortreallocate") == 0 ) {
00643             if ( AC.SortReallocateFlag == 2 ) {
00644                 /* The flag has been set by #sortreallocate, and it was off before. Leave it as 2,
00645                    so that the reallocation still happens in the current module. It will be turned
00646                    off after the reallocation is done. */
00647                 return(0);
00648             }
00649         }
00650         *s = c;
00651         *onoffoptions[i].var = onoffoptions[i].flags;
00652         AR.SortType = AC.SortType;
00653         AC.mparallelfalg = AC.parallelfalg | AM.hparallelfalg;
00654     }
00655 }
00656
00657 /*
00658 #] CoOff :
00659 #[ CoOn :
00660 */
00661
00662 int CoOn(UBYTE *s)
00663 {
00664     GETIDENTITY
00665     UBYTE *t, c;
00666     int i, num = sizeof(onoffoptions)/sizeof(KEYWORD);
00667     LONG interval;
00668     for (;;) {
00669         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00670         if ( *s == 0 ) return(0);
00671         if ( chartype[*s] != 0 ) {
00672             MesPrint("&Illegal character or option encountered in ON statement");
00673             return(-1);
00674         }
00675         t = s; while ( chartype[*s] == 0 ) s++;
00676         c = *s; *s = 0;
00677         for ( i = 0; i < num; i++ ) {
00678             if ( StrICont(t, (UBYTE *) (onoffoptions[i].name)) == 0 ) break;
00679         }
00680         if ( i >= num ) {
00681             MesPrint("&Unrecognized option in ON statement: %s", t);
00682             *s = c; return(-1);
00683         }
00684         if ( StrICont(t, (UBYTE *) "backtrace") == 0 ) {
00685             #ifndef ENABLE_BACKTRACE
00686                 Warning("backtrace not supported on this platform");
00687             #endif
00688         }
00689         else if ( StrICont(t, (UBYTE *) "compress") == 0 ) {
00690             AR.zipCompress = 0;
00691             *s = c;
00692             while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00693             if ( *s ) {
00694                 t = s;

```

```

00695         while ( FG.cTable[*s] <= 1 ) s++;
00696         c = *s; *s = 0;
00697         if ( StrICmp(t, (UBYTE *)"gzip") == 0 ) {
00698 #ifndef WITHZLIB
00699             Warning("gzip compression not supported on this platform");
00700 #endif
00701 #ifdef WITHZSTD
00702             /* If gzip is specified, turn off zstd compression. zlib still goes via the
00703 wrapper. */
00704             ZWRAP_useZSTDcompression(0);
00705 #endif
00706         }
00707         else if ( StrICmp(t, (UBYTE *)"zstd") == 0 ) {
00708 #ifdef WITHZSTD
00709             ZWRAP_useZSTDcompression(1);
00710 #else
00711             Warning("zstd compression not supported on this platform");
00712 #endif
00713         }
00714         else {
00715             MesPrint("&Unrecognized option in ON compress statement: %s",t);
00716             return(-1);
00717         }
00718         /* Whether we are using zlib or zstd, accept and use a compression level. */
00719         *s = c;
00720         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00721         if ( FG.cTable[*s] == 1 ) {
00722             AR.gzipCompress = *s++ - '0';
00723             while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00724             if ( *s ) {
00725                 MesPrint("&Unrecognized option in ON compress gzip/zstd statement: %s",t);
00726                 return(-1);
00727             }
00728             else if ( *s == 0 ) {
00729                 AR.gzipCompress = GZIPDEFAULT;
00730             }
00731             else {
00732                 MesPrint("&Unrecognized option in ON compress gzip/zstd statement: %s, single
00733 digit expected",t);
00734                 return(-1);
00735             }
00736         }
00737         else if ( StrICont(t, (UBYTE *)"checkpoint") == 0 ) {
00738             PrintDeprecation("the checkpoint mechanism", "issues/626");
00739             AC.CheckpointInterval = 0;
00740             if ( AC.CheckpointRunBefore ) { free(AC.CheckpointRunBefore); AC.CheckpointRunBefore =
00741 NULL; }
00742             if ( AC.CheckpointRunAfter ) { free(AC.CheckpointRunAfter); AC.CheckpointRunAfter = NULL;
00743 }
00744             *s = c;
00745             while ( *s ) {
00746                 while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00747                 if ( FG.cTable[*s] == 1 ) {
00748                     interval = 0;
00749                     t = s;
00750                     do { interval = 10*interval + *s++ - '0'; } while ( FG.cTable[*s] == 1 );
00751                     if ( *s == 's' || *s == 'S' ) {
00752                         s++;
00753                     }
00754                     else if ( *s == 'm' || *s == 'M' ) {
00755                         interval *= 60; s++;
00756                     }
00757                     else if ( *s == 'h' || *s == 'H' ) {
00758                         interval *= 3600; s++;
00759                     }
00760                     else if ( *s == 'd' || *s == 'D' ) {
00761                         interval *= 86400; s++;
00762                     }
00763                     if ( *s != ',' && FG.cTable[*s] != 6 && FG.cTable[*s] != 10 ) {
00764                         MesPrint("&Unrecognized time interval in ON Checkpoint statement: %s", t);
00765                         return(-1);
00766                     }
00767                     AC.CheckpointInterval = interval * 100; /* in 1/100 of seconds */
00768                 }
00769                 else if ( FG.cTable[*s] == 0 ) {
00770                     int type;
00771                     t = s;
00772                     while ( FG.cTable[*s] == 0 ) s++;
00773                     c = *s; *s = 0;
00774                     if ( StrICmp(t, (UBYTE *)"run") == 0 ) {
00775                         type = 3;
00776                     }
00777                     else if ( StrICmp(t, (UBYTE *)"runafter") == 0 ) {
00778                         type = 2;
00779                     }
00780                 }
00781             }

```

```

00778         else if ( StrICmp(t, (UBYTE *)"runbefore") == 0 ) {
00779             type = 1;
00780         }
00781         else {
00782             MesPrint("&Unrecognized option in ON Checkpoint statement: %s", t);
00783             *s = c; return(-1);
00784         }
00785         *s = c;
00786         if ( *s != '=' && FG.cTable[*s] != 9 ) {
00787             MesPrint("&Unrecognized option in ON Checkpoint statement: %s", t);
00788             return(-1);
00789         }
00790         ++s;
00791         t = ++s;
00792         while ( *s ) {
00793             if ( FG.cTable[*s] == 9 ) {
00794                 c = *s; *s = 0;
00795                 if ( type & 1 ) {
00796                     if ( AC.CheckpointRunBefore ) {
00797                         free(AC.CheckpointRunBefore); AC.CheckpointRunBefore = NULL;
00798                     }
00799                     if ( s-t > 0 ) {
00800                         AC.CheckpointRunBefore = Malloc1(s-t+1, "AC.CheckpointRunBefore");
00801                         StrCopy(t, (UBYTE*)AC.CheckpointRunBefore);
00802                     }
00803                 }
00804                 if ( type & 2 ) {
00805                     if ( AC.CheckpointRunAfter ) {
00806                         free(AC.CheckpointRunAfter); AC.CheckpointRunAfter = NULL;
00807                     }
00808                     if ( s-t > 0 ) {
00809                         AC.CheckpointRunAfter = Malloc1(s-t+1, "AC.CheckpointRunAfter");
00810                         StrCopy(t, (UBYTE*)AC.CheckpointRunAfter);
00811                     }
00812                 }
00813                 *s = c;
00814                 break;
00815             }
00816             ++s;
00817         }
00818         if ( FG.cTable[*s] != 9 ) {
00819             MesPrint("&Unrecognized option in ON Checkpoint statement: %s", t);
00820             return(-1);
00821         }
00822         ++s;
00823     }
00824 }
00825 /*
00826 if ( AC.NoShowInput == 0 ) {
00827     MesPrint("Checkpoints activated.");
00828     if ( AC.CheckpointInterval ) {
00829         MesPrint("-> Minimum saving interval: %1 seconds.", AC.CheckpointInterval/100);
00830     }
00831     else {
00832         MesPrint("-> No minimum saving interval given. Saving after EVERY module.");
00833     }
00834     if ( AC.CheckpointRunBefore ) {
00835         MesPrint("-> Calling script \"%s\" before saving.", AC.CheckpointRunBefore);
00836     }
00837     if ( AC.CheckpointRunAfter ) {
00838         MesPrint("-> Calling script \"%s\" after saving.", AC.CheckpointRunAfter);
00839     }
00840 }
00841 */
00842 }
00843 else if ( StrICont(t, (UBYTE *)"indentSpace") == 0 ) {
00844     *s = c;
00845     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00846     if ( *s ) {
00847         i = 0;
00848         while ( FG.cTable[*s] == 1 ) { i = 10*i + *s++ - '0'; }
00849         if ( *s ) {
00850             MesPrint("&Unrecognized option in ON IndentSpace statement: %s", t);
00851             return(-1);
00852         }
00853         if ( i > 40 ) {
00854             Warning("IndentSpace parameter adjusted to 40");
00855             i = 40;
00856         }
00857         AO.IndentSpace = i;
00858     }
00859     else {
00860         AO.IndentSpace = AM.ggIndentSpace;
00861     }
00862     return(0);
00863 }
00864 else if ( ( StrICont(t, (UBYTE *)"fewerstats") == 0 ) ||

```

```

00865         ( StrICont(t, (UBYTE *)"fewerstatistics") == 0 ) ) {
00866     *s = c;
00867     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00868     if ( *s ) {
00869         i = 0;
00870         while ( FG.cTable[*s] == 1 ) { i = 10*i + *s++ - '0'; }
00871         if ( *s ) {
00872             MesPrint("&Unrecognized option in ON FewerStatistics statement: %s",t);
00873             return(-1);
00874         }
00875         if ( i > AM.S0->MaxPatches ) {
00876             if ( AC.WarnFlag )
00877                 MesPrint("&Warning: FewerStatistics parameter greater than MaxPatches(=%d).
Adjusted to %d"
00878                     ,AM.S0->MaxPatches, (AM.S0->MaxPatches+1)/2);
00879             i = (AM.S0->MaxPatches+1)/2;
00880         }
00881         AC.ShortStatsMax = i;
00882     }
00883     else {
00884         AC.ShortStatsMax = 10; /* default value */
00885     }
00886     return(0);
00887 }
00888 else if ( StrICont(t, (UBYTE *)"threads") == 0 ) {
00889     if ( AM.totalnumberofthreads > 1 ) AS.MultiThreaded = 1;
00890 }
00891 else if ( StrICont(t, (UBYTE *)"flag") == 0 ) {
00892     *s = c;
00893     return(CoFlags(s,1));
00894 }
00895 else if ( StrICont(t, (UBYTE *)"innertest") == 0 ) {
00896     UBYTE *t;
00897     *s = c;
00898     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00899     if ( *s ) {
00900         t = s; while ( *t ) t++;
00901         while ( t[-1] == ' ' || t[-1] == '\t' ) t--;
00902         c = *t; *t = 0;
00903         if ( AC.TestValue ) M_free(AC.TestValue, "InnerTest");
00904         AC.TestValue = strDupl(s, "InnerTest");
00905         *t = c;
00906         s = t;
00907         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
00908     }
00909     else {
00910         if ( AC.TestValue ) {
00911             M_free(AC.TestValue, "InnerTest");
00912             AC.TestValue = 0;
00913         }
00914     }
00915 }
00916 else if ( StrICont(t, (UBYTE *)"flint") == 0 ) {
00917     #ifndef WITHFLINT
00918         MesPrint("&Warning: FORM was not built with FLINT support.");
00919         MesPrint("Statement has no effect.");
00920     #endif
00921 }
00922 else { *s = c; }
00923 *onoffoptions[i].var = onoffoptions[i].type;
00924 AR.SortType = AC.SortType;
00925 AC.mparallelfalg = AC.parallelfalg | AM.hparallelfalg;
00926 }
00927 }
00928
00929 /*
00930  #] CoOn :
00931  #[ CoInsideFirst :
00932  */
00933
00934 int CoInsideFirst(UBYTE *s) { return(setonoff(s,&AC.insidefirst,1,0)); }
00935
00936 /*
00937  #] CoInsideFirst :
00938  #[ CoProperCount :
00939  */
00940
00941 int CoProperCount(UBYTE *s) { return(setonoff(s,&AC.BottomLevel,1,0)); }
00942
00943 /*
00944  #] CoProperCount :
00945  #[ CoDelete :
00946  */
00947
00948 int CoDelete(UBYTE *s)
00949 {
00950     int error = 0;

```

```

00951     if ( StrICmp(s, (UBYTE *)"storage") == 0 ) {
00952         if ( DeleteStore(1) < 0 ) {
00953             MesPrint("&Cannot restart storage file");
00954             error = 1;
00955         }
00956     }
00957     else {
00958         UBYTE *t = s, c;
00959         while ( *t && *t != ',' && *t != '>' ) t++;
00960         c = *t; *t = 0;
00961         if ( ( StrICmp(s, (UBYTE *)"extrasymbols") == 0 )
00962             || ( StrICmp(s, (UBYTE *)"extrasymbol") == 0 ) ) {
00963             WORD x = 0;
00964             /*
00965              * Either deletes all extra symbols or deletes above a given number
00966              */
00967             *t = c; s = t;
00968             if ( *s == '>' ) {
00969                 s++;
00970                 if ( FG.cTable[*s] != 1 ) goto unknown;
00971                 while ( *s <= '9' && *s >= '0' ) x = 10*x + *s++ - '0';
00972                 if ( *s ) goto unknown;
00973             }
00974             else if ( *s ) goto unknown;
00975             if ( x < AM.gnumextrasyms ) x = AM.gnumextrasyms;
00976             PruneExtraSymbols(x);
00977         }
00978         else {
00979             *t = c;
00980             unknown:
00981             MesPrint("&Unknown option: %s", s);
00982             error = 1;
00983         }
00984     }
00985     return(error);
00986 }
00987
00988 /*
00989 #] CoDelete :
00990 #[ CoKeep :
00991 */
00992
00993 int CoKeep(UBYTE *s)
00994 {
00995     if ( StrICmp(s, (UBYTE *)"brackets") == 0 ) AC.ComDefer = 1;
00996     else { MesPrint("&Unknown option: '%s'", s); return(1); }
00997     return(0);
00998 }
00999
01000 /*
01001 #] CoKeep :
01002 #[ CoFixIndex :
01003 */
01004
01005 int CoFixIndex(UBYTE *s)
01006 {
01007     int x, y, error = 0;
01008     while ( *s ) {
01009         if ( FG.cTable[*s] != 1 ) {
01010             proper: MesPrint("&Proper syntax is: FixIndex,number:value[,number,value];");
01011             return(1);
01012         }
01013         ParseNumber(x, s)
01014         if ( *s != ':' ) goto proper;
01015         s++;
01016         if ( *s != '-' && *s != '+' && FG.cTable[*s] != 1 ) goto proper;
01017         ParseSignedNumber(y, s)
01018         if ( *s && *s != ',' ) goto proper;
01019         while ( *s == ',' ) s++;
01020         if ( x >= AM.OffsetIndex ) {
01021             MesPrint("&Fixed index out of allowed range. Change ConstIndex in setup file?");
01022             MesPrint("&Current value of ConstIndex = %d", AM.OffsetIndex-1);
01023             error = 1;
01024         }
01025         if ( y != (int)((WORD)y) ) {
01026             MesPrint("&Value of d_(%d,%d) outside range for this computer", x, x);
01027             error = 1;
01028         }
01029         if ( error == 0 ) AC.FixIndices[x] = y;
01030     }
01031     return(error);
01032 }
01033
01034 /*
01035 #] CoFixIndex :
01036 #[ CoMetric :
01037 */

```

```

01038
01039 int CoMetric(UBYTE *s)
01040 { DUMMYUSE(s); MesPrint("&The metric statement does not do anything yet"); return(1); }
01041
01042 /*
01043 #] CoMetric :
01044 #[ DoPrint :
01045 */
01046
01047 int DoPrint(UBYTE *s, int par)
01048 {
01049     int i, error = 0, numdol = 0, type;
01050     WORD handle = -1;
01051     UBYTE *name, c, *t;
01052     EXPRESSIONS e;
01053     WORD numexpr, tofile = 0, *w, par2 = 0;
01054     CBUF *C = cbuf + AC.cbufnum;
01055     while ( *s == ',' ) s++;
01056     if ( ( *s == '+' || *s == '-' ) && ( s[1] == 'f' || s[1] == 'F' ) ) {
01057         t = s + 2; while ( *t == ' ' || *t == ',' ) t++;
01058         if ( *t == '"' ) {
01059             if ( *s == '+' ) { tofile = 1; handle = AC.LogHandle; }
01060             s = t;
01061         }
01062     }
01063     else if ( *s == '<' ) {
01064         UBYTE *filename;
01065         s++; filename = s;
01066         while ( *s && *s != '>' ) s++;
01067         if ( *s == 0 ) {
01068             MesPrint("&Improper filename in print statement");
01069             return(1);
01070         }
01071         *s++ = 0;
01072         tofile = 1;
01073         if ( ( handle = GetChannel((char *)filename,1) ) < 0 ) return(1);
01074         SKIPBLANKS(s) if ( *s == ',' ) s++; SKIPBLANKS(s)
01075         if ( *s == '+' && ( s[1] == 's' || s[1] == 'S' ) ) {
01076             s += 2;
01077             par2 |= PRINTONETERM;
01078             if ( *s == 's' || *s == 'S' ) {
01079                 s++;
01080                 par2 |= PRINTONEFUNCTION;
01081                 if ( *s == 's' || *s == 'S' ) {
01082                     s++;
01083                     par2 |= PRINTALL;
01084                 }
01085             }
01086             SKIPBLANKS(s) if ( *s == ',' ) s++; SKIPBLANKS(s)
01087         }
01088     }
01089     if ( par == PRINTON && *s == '"' ) {
01090         WORD code[3];
01091         if ( tofile == 1 ) code[0] = TYPEFPRINT;
01092         else code[0] = TYPEPRINT;
01093         code[1] = handle;
01094         code[2] = par2;
01095         s++; name = s;
01096         while ( *s && *s != '"' ) {
01097             if ( *s == '\\' ) s++;
01098             if ( *s == '%' && s[1] == '$' ) numdol++;
01099             s++;
01100         }
01101         if ( *s != '"' ) {
01102             MesPrint("&String in print statement should be enclosed in \"");
01103             return(1);
01104         }
01105         *s = 0;
01106         AddComString(3,code,name,1);
01107         *s++ = '"';
01108         while ( *s == ',' ) {
01109             s++;
01110             if ( *s == '$' ) {
01111                 s++; name = s; while ( FG.cTable[*s] <= 1 ) s++;
01112                 c = *s; *s = 0;
01113                 type = GetName(AC.dollarnames,name,&numexpr,NOAUTO);
01114                 if ( type == NAMENOTFOUND ) {
01115                     MesPrint("&$ variable %s not (yet) defined",name);
01116                     error = 1;
01117                 }
01118                 else {
01119                     C->lhs[C->numlhs][1] += 2;
01120                     *(C->Pointer)++ = DOLLAREXPRESSION;
01121                     *(C->Pointer)++ = numexpr;
01122                     numdol--;
01123                 }
01124             }

```

```

01125         else {
01126             MesPrint("&Illegal object in print statement");
01127             error = 1;
01128             return(error);
01129         }
01130         *s = c;
01131         if ( c == '[' ) {
01132             w = C->Pointer;
01133             s++;
01134             s = GetDoParam(s,&(C->Pointer),-1);
01135             if ( s == 0 ) return(1);
01136             if ( *s != ']' ) {
01137                 MesPrint("&unmatched [] in $ factor");
01138                 return(1);
01139             }
01140             C->lhs[C->numlhs][1] += C->Pointer - w;
01141             s++;
01142         }
01143     }
01144     if ( *s != 0 ) {
01145         MesPrint("&Illegal object in print statement");
01146         error = 1;
01147     }
01148     if ( numdol > 0 ) {
01149         MesPrint("&More $ variables asked for than provided");
01150         error = 1;
01151     }
01152     *(C->Pointer)++ = 0;
01153     return(error);
01154 }
01155 if ( *s == 0 ) { /* All active expressions */
01156 AllExpr:
01157     for ( e = Expressions, i = NumExpressions; i > 0; i--, e++ ) {
01158         if ( e->status == LOCALEXPRESSION || e->status ==
01159             GLOBALEXPRESSION || e->status == UNHIDELEXPRESSION
01160             || e->status == UNHIDEEXPRESSION ) e->printflag = par;
01161     }
01162     return(error);
01163 }
01164 while ( *s ) {
01165     if ( *s == '+' ) {
01166         s++;
01167         if ( tolower(*s) == 'f' ) par |= PRINTLFILE;
01168         else if ( tolower(*s) == 's' ) {
01169             if ( tolower(s[1]) == 's' ) {
01170                 if ( tolower(s[2]) == 's' ) {
01171                     par |= PRINTONEFUNCTION | PRINTONETERM | PRINTALL;
01172                     s++;
01173                 }
01174                 else if ( ( par & 3 ) < 2 ) par |= PRINTONEFUNCTION | PRINTONETERM;
01175                 s++;
01176             }
01177             else {
01178                 if ( ( par & 3 ) < 2 ) par |= PRINTONETERM;
01179             }
01180         }
01181         else {
01182 illeg:         MesPrint("&Illegal option in (n)print statement");
01183                 error = 1;
01184             }
01185             s++;
01186             if ( *s == 0 ) goto AllExpr;
01187         }
01188         else if ( *s == '-' ) {
01189             s++;
01190             if ( tolower(*s) == 'f' ) par &= ~PRINTLFILE;
01191             else if ( tolower(*s) == 's' ) {
01192                 if ( tolower(s[1]) == 's' ) {
01193                     if ( tolower(s[2]) == 's' ) {
01194                         par &= ~PRINTALL;
01195                         s++;
01196                     }
01197                     else if ( ( par & 3 ) < 2 ) {
01198                         par &= ~PRINTONEFUNCTION;
01199                         par &= ~PRINTALL;
01200                     }
01201                     s++;
01202                 }
01203             }
01204             else {
01205                 if ( ( par & 3 ) < 2 ) {
01206                     par &= ~PRINTONETERM;
01207                     par &= ~PRINTONEFUNCTION;
01208                     par &= ~PRINTALL;
01209                 }
01210             }
01211             else goto illeg;

```



```

01212         s++;
01213         if ( *s == 0 ) goto AllExpr;
01214     }
01215     else if ( FG.cTable[*s] == 0 || *s == '[' ) {
01216         name = s;
01217         if ( ( s = SkipAName(s) ) == 0 ) {
01218             MesPrint("&Improper name in (n)print statement");
01219             return(1);
01220         }
01221         c = *s; *s = 0;
01222         if ( ( GetName(AC.exprnames,name,&numexpr,NOAUTO) == CEXPRESSION )
01223             && ( Expressions[numexpr].status == LOCALEXPRESSION
01224                 || Expressions[numexpr].status == GLOBALEXPRESSION ) ) {
01225 FoundExpr;;
01226             if ( c == '[' && s[1] == ']' ) {
01227                 Expressions[numexpr].printflag = par | PRINTCONTENTS;
01228                 *s++ = c; c = *++s;
01229             }
01230             else
01231                 Expressions[numexpr].printflag = par;
01232         }
01233         else if ( GetLastExprName(name,&numexpr)
01234                 && ( Expressions[numexpr].status == LOCALEXPRESSION
01235                     || Expressions[numexpr].status == GLOBALEXPRESSION
01236                     || Expressions[numexpr].status == UNHIDELEXPRESSION
01237                     || Expressions[numexpr].status == UNHIDEGEXPRESSION
01238                 ) ) {
01239             goto FoundExpr;
01240         }
01241         else {
01242             MesPrint("%s is not the name of an active expression",name);
01243             error = 1;
01244         }
01245         *s++ = c;
01246         if ( c == 0 ) return(0);
01247         if ( c == '-' || c == '+' ) s--;
01248     }
01249     else if ( *s == ',' ) s++;
01250     else {
01251         MesPrint("&Illegal object in (n)print statement");
01252         return(1);
01253     }
01254 }
01255 return(0);
01256 }
01257
01258 /*
01259 #] DoPrint :
01260 #[ CoPrint :
01261 */
01262
01263 int CoPrint(UBYTE *s) { return(DoPrint(s,PRINTON)); }
01264
01265 /*
01266 #] CoPrint :
01267 #[ CoPrintB :
01268 */
01269
01270 int CoPrintB(UBYTE *s) { return(DoPrint(s,PRINTCONTENT)); }
01271
01272 /*
01273 #] CoPrintB :
01274 #[ CoNPrint :
01275 */
01276
01277 int CoNPrint(UBYTE *s) { return(DoPrint(s,PRINTOFF)); }
01278
01279 /*
01280 #] CoNPrint :
01281 #[ CoPushHide :
01282 */
01283
01284 int CoPushHide(UBYTE *s)
01285 {
01286     GETIDENTITY
01287     WORD *ScratchBuf;
01288     int i;
01289     if ( AR.Fscr[2].PObuffer == 0 ) {
01290         ScratchBuf = (WORD *)Malloca(AM.HideSize*sizeof(WORD),"hidesize");
01291         AR.Fscr[2].POsize = AM.HideSize * sizeof(WORD);
01292         AR.Fscr[2].POfull = AR.Fscr[2].POfill = AR.Fscr[2].PObuffer = ScratchBuf;
01293         AR.Fscr[2].POstop = AR.Fscr[2].PObuffer + AM.HideSize;
01294         PUTZERO(AR.Fscr[2].POposition);
01295     }
01296     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01297     AC.HideLevel += 2;
01298     if ( *s ) {

```

```

01299         MesPrint("&PushHide statement should have no arguments");
01300         return(-1);
01301     }
01302     for ( i = 0; i < NumExpressions; i++ ) {
01303         switch ( Expressions[i].status ) {
01304             case DROPLEXPRESSION:
01305             case SKIPLEXPRESSION:
01306             case LOCALEXPRESSION:
01307                 Expressions[i].status = HIDELEXPRESSION;
01308                 Expressions[i].hidelevel = AC.HideLevel-1;
01309                 break;
01310             case DROPGEXPRESSION:
01311             case SKIPGEXPRESSION:
01312             case GLOBALEXPRESSION:
01313                 Expressions[i].status = HIDEGEXPRESSION;
01314                 Expressions[i].hidelevel = AC.HideLevel-1;
01315                 break;
01316             default:
01317                 break;
01318         }
01319     }
01320     return(0);
01321 }
01322
01323 /*
01324 #] CoPushHide :
01325 #[ CoPopHide :
01326 */
01327
01328 int CoPopHide(UBYTE *s)
01329 {
01330     int i;
01331     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01332     if ( AC.HideLevel <= 0 ) {
01333         MesPrint("&PopHide statement without corresponding PushHide statement");
01334         return(-1);
01335     }
01336     AC.HideLevel -= 2;
01337     if ( *s ) {
01338         MesPrint("&PopHide statement should have no arguments");
01339         return(-1);
01340     }
01341     for ( i = 0; i < NumExpressions; i++ ) {
01342         switch ( Expressions[i].status ) {
01343             case HIDDENLEXPRESSION:
01344                 if ( Expressions[i].hidelevel > AC.HideLevel )
01345                     Expressions[i].status = UNHIDELEXPRESSION;
01346                 break;
01347             case HIDDENGEXPRESSION:
01348                 if ( Expressions[i].hidelevel > AC.HideLevel )
01349                     Expressions[i].status = UNHIDEGEXPRESSION;
01350                 break;
01351             default:
01352                 break;
01353         }
01354     }
01355     return(0);
01356 }
01357
01358 /*
01359 #] CoPopHide :
01360 #[ SetExprCases :
01361 */
01362
01363 int SetExprCases(int par, int setunset, int val)
01364 {
01365     switch ( par ) {
01366         case SKIP:
01367             switch ( val ) {
01368                 case SKIPLEXPRESSION:
01369                     if ( !setunset ) val = LOCALEXPRESSION;
01370                     break;
01371                 case SKIPGEXPRESSION:
01372                     if ( !setunset ) val = GLOBALEXPRESSION;
01373                     break;
01374                 case LOCALEXPRESSION:
01375                     if ( setunset ) val = SKIPLEXPRESSION;
01376                     break;
01377                 case GLOBALEXPRESSION:
01378                     if ( setunset ) val = SKIPGEXPRESSION;
01379                     break;
01380                 case INTOHIDEGEXPRESSION:
01381                 case INTOHIDELEXPRESSION:
01382                 default:
01383                     break;
01384             }
01385         break;

```

```

01386     case DROP:
01387         switch ( val ) {
01388             case SKIPLEXPRESSION:
01389             case LOCALEXPRESSION:
01390             case HIDELEXPRESSION:
01391                 if ( setunset ) val = DROPLEXPRESSION;
01392                 break;
01393             case DROPLEXPRESSION:
01394                 if ( !setunset ) val = LOCALEXPRESSION;
01395                 break;
01396             case SKIPGEXPRESSION:
01397             case GLOBALEXPRESSION:
01398             case HIDEGEXPRESSION:
01399                 if ( setunset ) val = DROPGEXPRESSION;
01400                 break;
01401             case DROPGEXPRESSION:
01402                 if ( !setunset ) val = GLOBALEXPRESSION;
01403                 break;
01404             case HIDDENLEXPRESSION:
01405             case UNHIDELEXPRESSION:
01406                 if ( setunset ) val = DROPHLEXPRESSION;
01407                 break;
01408             case HIDDENGEXPRESSION:
01409             case UNHIDEGEXPRESSION:
01410                 if ( setunset ) val = DROPHGEXPRESSION;
01411                 break;
01412             case DROPHLEXPRESSION:
01413                 if ( !setunset ) val = HIDDENLEXPRESSION;
01414                 break;
01415             case DROPHGEXPRESSION:
01416                 if ( !setunset ) val = HIDDENGEXPRESSION;
01417                 break;
01418             case INTOHIDEGEXPRESSION:
01419             case INTOHIDELEXPRESSION:
01420             default:
01421                 break;
01422         }
01423         break;
01424     case HIDE:
01425         switch ( val ) {
01426             case DROPLEXPRESSION:
01427             case SKIPLEXPRESSION:
01428             case LOCALEXPRESSION:
01429                 if ( setunset ) val = HIDELEXPRESSION;
01430                 break;
01431             case HIDELEXPRESSION:
01432                 if ( !setunset ) val = LOCALEXPRESSION;
01433                 break;
01434             case DROPGEXPRESSION:
01435             case SKIPGEXPRESSION:
01436             case GLOBALEXPRESSION:
01437                 if ( setunset ) val = HIDEGEXPRESSION;
01438                 break;
01439             case HIDEGEXPRESSION:
01440                 if ( !setunset ) val = GLOBALEXPRESSION;
01441                 break;
01442             case INTOHIDEGEXPRESSION:
01443             case INTOHIDELEXPRESSION:
01444             default:
01445                 break;
01446         }
01447         break;
01448     case UNHIDE:
01449         switch ( val ) {
01450             case HIDDENLEXPRESSION:
01451             case DROPHLEXPRESSION:
01452                 if ( setunset ) val = UNHIDELEXPRESSION;
01453                 break;
01454             case UNHIDELEXPRESSION:
01455                 if ( !setunset ) val = HIDDENLEXPRESSION;
01456                 break;
01457             case HIDDENGEXPRESSION:
01458             case DROPHGEXPRESSION:
01459                 if ( setunset ) val = UNHIDEGEXPRESSION;
01460                 break;
01461             case UNHIDEGEXPRESSION:
01462                 if ( !setunset ) val = HIDDENGEXPRESSION;
01463                 break;
01464             case INTOHIDEGEXPRESSION:
01465             case INTOHIDELEXPRESSION:
01466             default:
01467                 break;
01468         }
01469         break;
01470     case INTOHIDE:
01471         switch ( val ) {
01472             case HIDDENLEXPRESSION:

```

```

01473         case HIDDENEXPRESSION:
01474             MesPrint("&Expression is already hidden");
01475             return(-1);
01476         case DROPHLEXPRESSION:
01477         case DROPHGEXPRESSION:
01478         case UNHIDELEXPRESSION:
01479         case UNHIDEGEXPRESSION:
01480             if ( setunset ) {
01481                 MesPrint("&Cannot unhide/drop and put intohide expression in the same
module");
01482                 return(-1);
01483             }
01484             break;
01485         case LOCALEXPRESSION:
01486         case DROPLEXPRESSION:
01487         case SKIPLEXPRESSION:
01488         case HIDELEXPRESSION:
01489             if ( setunset ) val = INTOHIDELEXPRESSION;
01490             break;
01491         case GLOBALEXPRESSION:
01492         case DROPGEXPRESSION:
01493         case SKIPGEXPRESSION:
01494         case HIDEGEXPRESSION:
01495             if ( setunset ) val = INTOHIDEGEXPRESSION;
01496             break;
01497         case INTOHIDELEXPRESSION:
01498             if ( !setunset ) val = LOCALEXPRESSION;
01499             break;
01500         case INTOHIDEGEXPRESSION:
01501             if ( !setunset ) val = GLOBALEXPRESSION;
01502             break;
01503         default:
01504             break;
01505     }
01506     break;
01507     default:
01508         break;
01509 }
01510 return(val);
01511 }
01512
01513 /*
01514 #] SetExprCases :
01515 #[ SetExpr :
01516 */
01517
01518 int SetExpr(UBYTE *s, int setunset, int par)
01519 {
01520     WORD *w, numexpr;
01521     int error = 0, i;
01522     UBYTE *name, c;
01523     if ( *s == 0 ) {
01524         for ( i = 0; i < NumExpressions; i++ ) {
01525             w = &(Expressions[i].status);
01526             *w = SetExprCases(par,setunset,*w);
01527             if ( *w < 0 ) error = 1;
01528             if ( ( par == HIDE || par == INTOHIDE ) && setunset == 1 )
01529                 Expressions[i].hidelevel = AC.HideLevel;
01530         }
01531         return(0);
01532     }
01533     while ( *s ) {
01534         if ( *s == ',' ) { s++; continue; }
01535         if ( *s == '0' ) { s++; continue; }
01536         name = s;
01537         if ( ( s = SkipAName(s) ) == 0 ) {
01538             MesPrint("&Improper name for an expression: '%s'",name);
01539             return(1);
01540         }
01541         c = *s; *s = 0;
01542         if ( GetName(AC.exprnames,name,&numexpr,NOAUTO) == CEXPRESSION ) {
01543             w = &(Expressions[numexpr].status);
01544             *w = SetExprCases(par,setunset,*w);
01545             if ( *w < 0 ) error = 1;
01546             if ( ( par == HIDE || par == INTOHIDE ) && setunset == 1 )
01547                 Expressions[numexpr].hidelevel = AC.HideLevel;
01548         }
01549         else if ( GetName(AC.varnames,name,&numexpr,NOAUTO) != NAMENOTFOUND ) {
01550             MesPrint("&%s is not an expression",name);
01551             error = 1;
01552         }
01553         *s = c;
01554     }
01555     return(error);
01556 }
01557
01558 /*

```

```

01559     #] SetExpr :
01560     #[ CoDrop :
01561     */
01562
01563 int CoDrop(UBYTE *s) { return(SetExpr(s,1,DROP)); }
01564
01565 /*
01566     #] CoDrop :
01567     #[ CoNoDrop :
01568     */
01569
01570 int CoNoDrop(UBYTE *s) { return(SetExpr(s,0,DROP)); }
01571
01572 /*
01573     #] CoNoDrop :
01574     #[ CoSkip :
01575     */
01576
01577 int CoSkip(UBYTE *s) { return(SetExpr(s,1,SKIP)); }
01578
01579 /*
01580     #] CoSkip :
01581     #[ CoNoSkip :
01582     */
01583
01584 int CoNoSkip(UBYTE *s) { return(SetExpr(s,0,SKIP)); }
01585
01586 /*
01587     #] CoNoSkip :
01588     #[ CoHide :
01589     */
01590
01591 int CoHide(UBYTE *inp) {
01592     GETIDENTITY
01593     WORD *ScratchBuf;
01594     if ( AR.Fscr[2].PObuffer == 0 ) {
01595         ScratchBuf = (WORD *)Malloc1(AM.HideSize*sizeof(WORD),"hidesize");
01596         AR.Fscr[2].POsize = AM.HideSize * sizeof(WORD);
01597         AR.Fscr[2].POfull = AR.Fscr[2].POfill = AR.Fscr[2].PObuffer = ScratchBuf;
01598         AR.Fscr[2].POstop = AR.Fscr[2].PObuffer + AM.HideSize;
01599         PUTZERO(AR.Fscr[2].POposition);
01600     }
01601     return(SetExpr(inp,1,HIDE));
01602 }
01603
01604 /*
01605     #] CoHide :
01606     #[ CoIntoHide :
01607     */
01608
01609 int CoIntoHide(UBYTE *inp) {
01610     GETIDENTITY
01611     WORD *ScratchBuf;
01612     if ( AR.Fscr[2].PObuffer == 0 ) {
01613         ScratchBuf = (WORD *)Malloc1(AM.HideSize*sizeof(WORD),"hidesize");
01614         AR.Fscr[2].POsize = AM.HideSize * sizeof(WORD);
01615         AR.Fscr[2].POfull = AR.Fscr[2].POfill = AR.Fscr[2].PObuffer = ScratchBuf;
01616         AR.Fscr[2].POstop = AR.Fscr[2].PObuffer + AM.HideSize;
01617         PUTZERO(AR.Fscr[2].POposition);
01618     }
01619     return(SetExpr(inp,1,INTOHIDE));
01620 }
01621
01622 /*
01623     #] CoIntoHide :
01624     #[ CoNoIntoHide :
01625     */
01626
01627 int CoNoIntoHide(UBYTE *inp) { return(SetExpr(inp,0,INTOHIDE)); }
01628
01629 /*
01630     #] CoNoIntoHide :
01631     #[ CoNoHide :
01632     */
01633
01634 int CoNoHide(UBYTE *inp) { return(SetExpr(inp,0,HIDE)); }
01635
01636 /*
01637     #] CoNoHide :
01638     #[ CoUnHide :
01639     */
01640
01641 int CoUnHide(UBYTE *inp) { return(SetExpr(inp,1,UNHIDE)); }
01642
01643 /*
01644     #] CoUnHide :
01645     #[ CoNoUnHide :

```

```

01646 */
01647
01648 int CoNoUnHide(UBYTE *inp) { return(SetExpr(inp,0,UNHIDE)); }
01649
01650 /*
01651     #] CoNoUnHide :
01652     #[ AddToCom :
01653 */
01654
01655 void AddToCom(int n, WORD *array)
01656 {
01657     CBUF *C = cbuf+AC.cbunum;
01658 #ifdef COMPUFDEBUG
01659     MesPrint("  %a",n,array);
01660 #endif
01661     while ( C->Pointer+n >= C->Top ) DoubleCbuffer(AC.cbunum,C->Pointer,18);
01662     while ( --n >= 0 ) *(C->Pointer)++ = *array++;
01663 }
01664
01665 /*
01666     #] AddToCom :
01667     #[ AddComString :
01668 */
01669
01670 int AddComString(int n, WORD *array, UBYTE *thestring, int par)
01671 {
01672     CBUF *C = cbuf+AC.cbunum;
01673     UBYTE *s = thestring, *w;
01674 #ifdef COMPUFDEBUG
01675     WORD *cc;
01676     UBYTE *ww;
01677 #endif
01678     int i, numchars = 0, size, zeroes;
01679     while ( *s ) {
01680         if ( *s == '\\\\' ) s++;
01681         else if ( par == 1 &&
01682             ( ( *s == '%' && s[1] != 't' && s[1] != 'T' && s[1] != '$' &&
01683               s[1] != 'w' && s[1] != 'W' && s[1] != 'r' && s[1] != 0 ) || *s == '#'
01684             || *s == '@' || *s == '&' ) ) {
01685             numchars++;
01686         }
01687         s++; numchars++;
01688     }
01689     AddLHS(AC.cbunum);
01690     size = numchars/sizeof(WORD)+1;
01691     while ( C->Pointer+size+n+2 >= C->Top ) DoubleCbuffer(AC.cbunum,C->Pointer,19);
01692 #ifdef COMPUFDEBUG
01693     cc = C->Pointer;
01694 #endif
01695     *(C->Pointer)++ = array[0];
01696     *(C->Pointer)++ = size+n+2;
01697     for ( i = 1; i < n; i++ ) *(C->Pointer)++ = array[i];
01698     *(C->Pointer)++ = size;
01699 #ifdef COMPUFDEBUG
01700     ww =
01701 #endif
01702     w = (UBYTE *) (C->Pointer);
01703     zeroes = size*sizeof(WORD)-numchars;
01704     s = thestring;
01705     while ( *s ) {
01706         if ( *s == '\\\\' ) s++;
01707         else if ( par == 1 && ( *s == '%' &&
01708             s[1] != 't' && s[1] != 'T' && s[1] != '$' &&
01709             s[1] != 'w' && s[1] != 'W' && s[1] != 'r' && s[1] != 0 ) || *s == '#'
01710             || *s == '@' || *s == '&' ) ) {
01711             *w++ = '%';
01712         }
01713         *w++ = *s++;
01714     }
01715     while ( --zeroes >= 0 ) *w++ = 0;
01716     C->Pointer += size;
01717 #ifdef COMPUFDEBUG
01718     MesPrint("LH: %a",size+1+n,cc);
01719     MesPrint("    %s",thestring);
01720 #endif
01721     return(0);
01722 }
01723
01724 /*
01725     #] AddComString :
01726     #[ Add2ComStrings :
01727 */
01728
01729 int Add2ComStrings(int n, WORD *array, UBYTE *string1, UBYTE *string2)
01730 {
01731     CBUF *C = cbuf+AC.cbunum;
01732     UBYTE *s1 = string1, *s2 = string2, *w;

```

```

01733     int i, num1chars = 0, num2chars = 0, size1, size2, zeroes1, zeroes2;
01734     AddLHS(AC.cbufnum);
01735     while ( *s1 ) { s1++; num1chars++; }
01736     size1 = num1chars/sizeof(WORD)+1;
01737     if ( s2 ) {
01738         while ( *s2 ) { s2++; num2chars++; }
01739         size2 = num2chars/sizeof(WORD)+1;
01740     }
01741     else size2 = 0;
01742     while ( C->Pointer+size1+size2+n+3 >= C->Top ) DoubleCbuffer(AC.cbufnum,C->Pointer,20);
01743     *(C->Pointer)++ = array[0];
01744     *(C->Pointer)++ = size1+size2+n+3;
01745     for ( i = 1; i < n; i++ ) *(C->Pointer)++ = array[i];
01746     *(C->Pointer)++ = size1;
01747     w = (UBYTE *) (C->Pointer);
01748     zeroes1 = size1*sizeof(WORD)-num1chars;
01749     s1 = string1;
01750     while ( *s1 ) { *w++ = *s1++; }
01751     while ( --zeroes1 >= 0 ) *w++ = 0;
01752     C->Pointer += size1;
01753     *(C->Pointer)++ = size2;
01754     if ( size2 ) {
01755         w = (UBYTE *) (C->Pointer);
01756         zeroes2 = size2*sizeof(WORD)-num2chars;
01757         s2 = string2;
01758         while ( *s2 ) { *w++ = *s2++; }
01759         while ( --zeroes2 >= 0 ) *w++ = 0;
01760         C->Pointer += size2;
01761     }
01762     return(0);
01763 }
01764
01765 /*
01766 #] Add2ComStrings :
01767 #[ CoDiscard :
01768 */
01769
01770 int CoDiscard(UBYTE *s)
01771 {
01772     if ( *s == 0 ) {
01773         Add2Com(TYPEDISCARD)
01774         return(0);
01775     }
01776     MesPrint("&Illegal argument in discard statement: '%s'",s);
01777     return(1);
01778 }
01779
01780 /*
01781 #] CoDiscard :
01782 #[ CoContract :
01783
01784 Syntax:
01785     Contract
01786     Contract:#
01787     Contract #
01788     Contract:##, #
01789 */
01790
01791 static WORD carray[5] = { TYPEOPERATION,5,CONTRACT,0,0 };
01792
01793 int CoContract(UBYTE *s)
01794 {
01795     int x;
01796     if ( *s == ':' ) {
01797         s++;
01798         ParseNumber(x,s)
01799         if ( *s != ',' && *s ) {
01800 proper:     MesPrint("&Illegal number in contract statement");
01801             return(1);
01802         }
01803         if ( *s ) s++;
01804         carray[4] = x;
01805     }
01806     else carray[4] = 0;
01807     if ( FG.cTable[*s] == 1 ) {
01808         ParseNumber(x,s)
01809         if ( *s ) goto proper;
01810         carray[3] = x;
01811     }
01812     else if ( *s ) goto proper;
01813     else carray[3] = -1;
01814     return(AddNtoL(5,carray));
01815 }
01816
01817 /*
01818 #] CoContract :
01819 #[ CoGoTo :

```

```

01820 */
01821
01822 int CoGoTo(UBYTE *inp)
01823 {
01824     UBYTE *s = inp;
01825     int x;
01826     while ( FG.cTable[*s] <= 1 ) s++;
01827     if ( *s ) {
01828         MesPrint("&Label should be an alpha-numeric string");
01829         return(1);
01830     }
01831     x = GetLabel(inp);
01832     Add3Com(TYPEGOTO,x);
01833     return(0);
01834 }
01835
01836 /*
01837 #] CoGoTo :
01838 #[ CoLabel :
01839 */
01840
01841 int CoLabel(UBYTE *inp)
01842 {
01843     UBYTE *s = inp;
01844     int x;
01845     while ( FG.cTable[*s] <= 1 ) s++;
01846     if ( *s ) {
01847         MesPrint("&Label should be an alpha-numeric string");
01848         return(1);
01849     }
01850     x = GetLabel(inp);
01851     if ( AC.Labels[x] >= 0 ) {
01852         MesPrint("&Label %s defined more than once",AC.LabelNames[x]);
01853         return(1);
01854     }
01855     AC.Labels[x] = cbuf[AC.cbufnum].numlhs;
01856     return(0);
01857 }
01858
01859 /*
01860 #] CoLabel :
01861 #[ DoArgument :
01862
01863 Layout:
01864     par,full size,numlhs(+1),par,scale
01865     scale is for normalize
01866 */
01867
01868 int DoArgument(UBYTE *s, int par)
01869 {
01870     GETIDENTITY
01871     UBYTE *name, *t, *v, c;
01872     WORD *oldworkpointer = AT.WorkPointer, *w, *ww, number, *scale;
01873     int error = 0, zeroflag, type, x;
01874     AC.lhdollarflag = 0;
01875     while ( *s == ',' ) s++;
01876     w = AT.WorkPointer;
01877     *w++ = par;
01878     w++;
01879     switch ( par ) {
01880         case TYPEARG:
01881             if ( AC.arglevel >= MAXNEST ) {
01882                 MesPrint("@Nesting of argument statements more than %d levels"
01883                     , (WORD)MAXNEST);
01884                 return(-1);
01885             }
01886             AC.argsumcheck[AC.arglevel] = NestingChecksum();
01887             AC.argstack[AC.arglevel] = cbuf[AC.cbufnum].Pointer
01888                 - cbuf[AC.cbufnum].Buffer + 2;
01889             AC.arglevel++;
01890             *w++ = cbuf[AC.cbufnum].numlhs;
01891             break;
01892         case TYPENORM:
01893         case TYPENORM4:
01894         case TYPESPLITARG:
01895         case TYPESPLITFIRSTARG:
01896         case TYPESPLITLASTARG:
01897         case TYPEFACTARG:
01898         case TYPEARGTOEXTRASymbol:
01899             *w++ = cbuf[AC.cbufnum].numlhs+1;
01900             break;
01901     }
01902     *w++ = par;
01903     scale = w;
01904     *w++ = 1;
01905     *w++ = 0;
01906     if ( *s == '^' ) {

```



```

01907         s++; ParseSignedNumber(x,s)
01908         while ( *s == ',' ) s++;
01909         *scale = x;
01910     }
01911     if ( *s == '(' ) {
01912         t = s+1; SKIPBRA3(s)      /* We did check the brackets already */
01913         if ( par == TYPEARG ) {
01914             MesPrint("&Illegal () entry in argument statement");
01915             error = 1; s++; goto skipbracks;
01916         }
01917         else if ( par == TYPESPLITFIRSTARG ) {
01918             MesPrint("&Illegal () entry in splitfirstarg statement");
01919             error = 1; s++; goto skipbracks;
01920         }
01921         else if ( par == TYPESPLITLASTARG ) {
01922             MesPrint("&Illegal () entry in splitlastarg statement");
01923             error = 1; s++; goto skipbracks;
01924         }
01925         v = t;
01926         while ( v < s ) {
01927             if ( *v == '?' ) {
01928                 MesPrint("&Wildcarding not allowed in this type of statement");
01929                 error = 1; break;
01930             }
01931             v++;
01932         }
01933         v = s++;
01934         if ( *t == '(' && v[-1] == ')' ) {
01935             t++; v--;
01936             if ( par == TYPESPLITARG ) oldworkpointer[0] = TYPESPLITARG2;
01937             else if ( par == TYPEFACTARG ) oldworkpointer[0] = TYPEFACTARG2;
01938             else if ( par == TYPENORM4 ) oldworkpointer[0] = TYPENORM4;
01939             else if ( par == TYPENORM ) {
01940                 if ( *t == '-' ) { oldworkpointer[0] = TYPENORM3; t++; }
01941                 else { oldworkpointer[0] = TYPENORM2; *scale = 0; }
01942             }
01943         }
01944         if ( error == 0 ) {
01945             CBUF *C = cbuf+AC.cbunum;
01946             WORD oldnumrhs = C->numrhs, oldnumlhs = C->numlhs;
01947             WORD prototype[SUBEXPSIZE+40]; /* Up to 10 nested sums! */
01948             WORD *m, *mm;
01949             int i, retcode;
01950             LONG oldpointer = C->Pointer - C->Buffer;
01951             *v = 0;
01952             prototype[0] = SUBEXPRESSION;
01953             prototype[1] = SUBEXPSIZE;
01954             prototype[2] = C->numrhs+1;
01955             prototype[3] = 1;
01956             prototype[4] = AC.cbunum;
01957             AT.WorkPointer += TYPEARGHEADSIZE+1;
01958             AddLHS(AC.cbunum);
01959             if ( ( retcode = CompileAlgebra(t,LHSIDE,prototype) ) < 0 )
01960                 error = 1;
01961             else {
01962                 prototype[2] = retcode;
01963                 ww = C->lhs[retcode];
01964                 AC.lhdollarflag = 0;
01965                 if ( *ww == 0 ) {
01966                     *w++ = -2; *w++ = 0;
01967                 }
01968                 else if ( ww[ww[0]] != 0 ) {
01969                     MesPrint("&There should be only one term between ()");
01970                     error = 1;
01971                 }
01972                 else if ( NewSort(BHEAD0) ) { if ( !error ) error = 1; }
01973                 else if ( NewSort(BHEAD0) ) {
01974                     LowerSortLevel();
01975                     if ( !error ) error = 1;
01976                 }
01977                 else {
01978                     AN.RepPoint = AT.RepCount + 1;
01979                     m = AT.WorkPointer;
01980                     mm = ww; i = *mm;
01981                     while ( --i >= 0 ) *m++ = *mm++;
01982                     mm = AT.WorkPointer; AT.WorkPointer = m;
01983                     AR.Cnumlhs = C->numlhs;
01984                     if ( Generator(BHEAD mm,C->numlhs) ) {
01985                         LowerSortLevel(); error = 1;
01986                     }
01987                     else if ( EndSort(BHEAD mm,0) < 0 ) {
01988                         error = 1;
01989                         AT.WorkPointer = mm;
01990                     }
01991                     else if ( *mm == 0 ) {
01992                         *w++ = -2; *w++ = 0;
01993                         AT.WorkPointer = mm;

```

```

01994         }
01995         else if ( mm[mm[0]] != 0 ) {
01996             error = 1;
01997             AT.WorkPointer = mm;
01998         }
01999         else {
02000             AT.WorkPointer = mm;
02001             m = mm+*mm;
02002             if ( par == TYPEFACTARG ) {
02003                 if ( *mm != ABS(m[-1])+1 ) {
02004                     *mm -= ABS(m[-1]); /* Strip coefficient */
02005                 }
02006                 mm[-1] = -*mm-1; w += *mm+1;
02007             }
02008             else {
02009                 *mm -= ABS(m[-1]); /* Strip coefficient */
02010             /*
02011                 if ( *mm == 1 ) { *w++ = -2; *w++ = 0; }
02012                 else
02013             /*
02014                 { mm[-1] = -*mm-1; w += *mm+1; }
02015             }
02016             oldworkpointer[1] = w - oldworkpointer;
02017         }
02018         LowerSortLevel();
02019     }
02020     oldworkpointer[5] = AC.lhdollarflag;
02021 }
02022 *v = ')';
02023 C->numrhs = oldnumrhs;
02024 C->numlhs = oldnumlhs;
02025 C->Pointer = C->Buffer + oldpointer;
02026 }
02027 }
02028 skipbracks:
02029     if ( *s == 0 ) { *w++ = 0; *w++ = 2; *w++ = 1; }
02030     else {
02031         do {
02032             if ( *s == ',' ) { s++; continue; }
02033             ww = w; *w++ = 0; w++;
02034             if ( FG.cTable[*s] > 1 && *s != '[' && *s != '{' ) {
02035                 MesPrint("&Illegal parameters in statement");
02036                 error = 1;
02037                 break;
02038             }
02039             while ( FG.cTable[*s] == 0 || *s == '[' || *s == '{' ) {
02040                 if ( *s == '{' ) {
02041                     name = s+1;
02042                     SKIPBRA2(s)
02043                     c = *s; *s = 0;
02044                     number = DoTempSet(name,s);
02045                     name--; *s++ = c; c = *s; *s = 0;
02046                     goto doset;
02047                 }
02048                 else {
02049                     name = s;
02050                     if ( ( s = SkipAName(s) ) == 0 ) {
02051                         MesPrint("&Illegal name '%s'",name);
02052                         return(1);
02053                     }
02054                     c = *s; *s = 0;
02055                     if ( ( type = GetName(AC.varnames,name,&number,WITHAUTO) ) == CSET ) {
02056                         doset:
02057                         if ( Sets[number].type != CFUNCTION ) goto nofun;
02058                         #ifdef WITHFLOAT
02059                         WORD *r1, *r2;
02060                         r1 = SetElements + Sets[number].first;
02061                         r2 = SetElements + Sets[number].last;
02062                         while ( r1 < r2 ) {
02063                             if ( *r1++ == FLOATFUN ) {
02064                                 MesPrint("&Illegal use of argument environment and float_.");
02065                                 error = 1;
02066                             }
02067                         }
02068                         #endif
02069                         *w++ = CSET; *w++ = number;
02070                     }
02071                     else if ( type == CFUNCTION ) {
02072                         #ifdef WITHFLOAT
02073                         if ( (number + FUNCTION) == FLOATFUN ) {
02074                             MesPrint("&Illegal use of argument environment and float_.");
02075                             error = 1;
02076                         }
02077                         #endif
02078                         *w++ = CFUNCTION; *w++ = number + FUNCTION;
02079                     }
02080                     else {
02081                         MesPrint("&%s is not a function or a set of functions"

```

```

02081         ,name);
02082         error = 1;
02083     }
02084     }
02085     *s = c;
02086     while ( *s == ',' ) s++;
02087 }
02088 ww[1] = w - ww;
02089 ww = w; w++; zeroflag = 0;
02090 while ( FG.cTable[*s] == 1 ) {
02091     ParseNumber(x,s)
02092     if ( *s && *s != ',' ) {
02093         MesPrint("&Illegal separator after number");
02094         error = 1;
02095         while ( *s && *s != ',' ) s++;
02096     }
02097     while ( *s == ',' ) s++;
02098     if ( x == 0 ) zeroflag = 1;
02099     if ( !zeroflag ) *w++ = (WORD)x;
02100 }
02101 *ww = w - ww;
02102 } while ( *s );
02103 }
02104 oldworkpointer[1] = w - oldworkpointer;
02105 if ( par == TYPEARG ) { /* To make sure. The Pointer might move in the future */
02106     AC.argstack[AC.arglevel-1] = cbuf[AC.cbunum].Pointer
02107         - cbuf[AC.cbunum].Buffer + 2;
02108 }
02109 AddNtoL(oldworkpointer[1],oldworkpointer);
02110 AT.WorkPointer = oldworkpointer;
02111 return(error);
02112 }
02113
02114 /*
02115 #] DoArgument :
02116 #[ CoArgument :
02117 */
02118
02119 int CoArgument(UBYTE *s) { return(DoArgument(s,TYPEARG)); }
02120
02121 /*
02122 #] CoArgument :
02123 #[ CoEndArgument :
02124 */
02125
02126 int CoEndArgument(UBYTE *s)
02127 {
02128     CBUF *C = cbuf+AC.cbunum;
02129     while ( *s == ',' ) s++;
02130     if ( *s ) {
02131         MesPrint("&Illegal syntax for EndArgument statement");
02132         return(1);
02133     }
02134     if ( AC.arglevel <= 0 ) {
02135         MesPrint("&EndArgument without corresponding Argument statement");
02136         return(1);
02137     }
02138     AC.arglevel--;
02139     cbuf[AC.cbunum].Buffer[AC.argstack[AC.arglevel]] = C->numlhs;
02140     if ( AC.argsumcheck[AC.arglevel] != NestingChecksum() ) {
02141         MesNesting();
02142         return(1);
02143     }
02144     return(0);
02145 }
02146
02147 /*
02148 #] CoEndArgument :
02149 #[ CoInside :
02150 */
02151
02152 int CoInside(UBYTE *s) { return(ExecInside(s)); }
02153
02154 /*
02155 #] CoInside :
02156 #[ CoEndInside :
02157 */
02158
02159 int CoEndInside(UBYTE *s)
02160 {
02161     CBUF *C = cbuf+AC.cbunum;
02162     while ( *s == ',' ) s++;
02163     if ( *s ) {
02164         MesPrint("&Illegal syntax for EndInside statement");
02165         return(1);
02166     }
02167     if ( AC.insidelevel <= 0 ) {

```

```

02168         MesPrint("&EndInside without corresponding Inside statement");
02169         return(1);
02170     }
02171     AC.insidelevel--;
02172     cbuf[AC.cbufnum].Buffer[AC.insidestack[AC.insidelevel]] = C->numlhs;
02173     if ( AC.insidesumcheck[AC.insidelevel] != NestingChecksum() ) {
02174         MesNesting();
02175         return(1);
02176     }
02177     return(0);
02178 }
02179
02180 /*
02181  #] CoEndInside :
02182  #[ CoNormalize :
02183  */
02184
02185 int CoNormalize(UBYTE *s) { return(DoArgument(s,TYPENORM)); }
02186
02187 /*
02188  #] CoNormalize :
02189  #[ CoMakeInteger :
02190  */
02191
02192 int CoMakeInteger(UBYTE *s) { return(DoArgument(s,TYPENORM4)); }
02193
02194 /*
02195  #] CoMakeInteger :
02196  #[ CoSplitArg :
02197  */
02198
02199 int CoSplitArg(UBYTE *s) { return(DoArgument(s,TYPESPLITARG)); }
02200
02201 /*
02202  #] CoSplitArg :
02203  #[ CoSplitFirstArg :
02204  */
02205
02206 int CoSplitFirstArg(UBYTE *s) { return(DoArgument(s,TYPESPLITFIRSTARG)); }
02207
02208 /*
02209  #] CoSplitFirstArg :
02210  #[ CoSplitLastArg :
02211  */
02212
02213 int CoSplitLastArg(UBYTE *s) { return(DoArgument(s,TYPESPLITLASTARG)); }
02214
02215 /*
02216  #] CoSplitLastArg :
02217  #[ CoFactArg :
02218  */
02219
02220 int CoFactArg(UBYTE *s) {
02221     if ( ( AC.topolynomialflag & TOPOLYNOMIALFLAG ) != 0 ) {
02222         MesPrint("&ToPolynomial statement and FactArg statement are not allowed in the same module");
02223         return(1);
02224     }
02225     AC.topolynomialflag |= FACTARGFLAG;
02226     return(DoArgument(s,TYPEFACTARG));
02227 }
02228
02229 /*
02230  #] CoFactArg :
02231  #[ DoSymmetrize :
02232
02233     Syntax:
02234     Symmetrize Fun[:[number]] [Fields]      -> par = 0;
02235     AntiSymmetrize Fun[:[number]] [Fields]   -> par = 1;
02236     CycleSymmetrize Fun[:[number]] [Fields] -> par = 2;
02237     RCycleSymmetrize Fun[:[number]] [Fields]-> par = 3;
02238  */
02239
02240 int DoSymmetrize(UBYTE *s, int par)
02241 {
02242     GETIDENTITY
02243     int extra = 0, error = 0, err, fix, x, groupsize, num, i;
02244     UBYTE *name, c;
02245     WORD funnum, *w, *ww, type;
02246     for(;;) {
02247         name = s;
02248         if ( ( s = SkipAName(s) ) == 0 ) {
02249             MesPrint("&Improper function name");
02250             return(1);
02251         }
02252         c = *s; *s = 0;
02253         if ( c != ',' || ( FG.cTable[s[1]] != 0 && s[1] != '[' ) ) break;
02254         if ( par <= 0 && StrICmp(name,(UBYTE *)"cyclic") == 0 ) extra = 2;

```

```

02255         else if ( par <= 0 && StrICmp(name, (UBYTE *) "rcyclic") == 0 ) extra = 6;
02256     else {
02257         MesPrint("&Illegal option: '%s'", name);
02258         error = 1;
02259     }
02260     *s++ = c;
02261 }
02262 if ( ( err = GetVar(name, &type, &funnum, CFUNCTION, WITHAUTO) ) == NAMENOTFOUND ) {
02263     MesPrint("&Undefined function: %s", name);
02264     AddFunction(name, 0, 0, 0, 0, 0, -1, -1);
02265     *s++ = c;
02266     return(1);
02267 }
02268 funnum += FUNCTION;
02269 if ( err == -1 ) error = 1;
02270 *s = c;
02271 if ( *s == ':' ) {
02272     s++;
02273     if ( *s == ',' || *s == '(' || *s == 0 ) fix = -1;
02274     else if ( FG.cTable[*s] == 1 ) {
02275         ParseNumber(fix, s)
02276         if ( fix == 0 )
02277             Warning("Restriction to zero arguments removed");
02278     }
02279     else {
02280         MesPrint("&Illegal character after :");
02281         return(1);
02282     }
02283 }
02284 else fix = 0;
02285 w = AT.WorkPointer;
02286 *w++ = TYPEOPERATION;
02287 w++;
02288 *w++ = SYMMETRIZE;
02289 *w++ = par | extra;
02290 *w++ = funnum;
02291 *w++ = fix;
02292 /*
02293  And now the argument lists. We have either ,#, #, ... or (#, #, ..., #), (#, ...
02294 */
02295 w += 2; ww = w; groupsize = -1;
02296 while ( *s == ',' ) s++;
02297 while ( *s ) {
02298     if ( *s == '(' ) {
02299         s++; num = 0;
02300         while ( *s && *s != ')' ) {
02301             if ( *s == ',' ) { s++; continue; }
02302             if ( FG.cTable[*s] != 1 ) goto illarg;
02303             ParseNumber(x, s)
02304             if ( x <= 0 || ( fix > 0 && x > fix ) ) goto illnum;
02305             num++;
02306             *w++ = x-1;
02307         }
02308         if ( *s == 0 ) {
02309             MesPrint("&Improper termination of statement");
02310             return(1);
02311         }
02312         if ( groupsize < 0 ) groupsize = num;
02313         else if ( groupsize != num ) goto group;
02314         s++;
02315     }
02316     else if ( FG.cTable[*s] == 1 ) {
02317         if ( groupsize < 0 ) groupsize = 1;
02318         else if ( groupsize != 1 ) {
02319             MesPrint("&All groups should have the same number of arguments");
02320             return(1);
02321         }
02322         ParseNumber(x, s)
02323         if ( x <= 0 || ( fix > 0 && x > fix ) ) {
02324             MesPrint("&Illegal argument number: %d", x);
02325             return(1);
02326         }
02327         *w++ = x-1;
02328     }
02329     else {
02330         MesPrint("&Illegal argument");
02331         return(1);
02332     }
02333     while ( *s == ',' ) s++;
02334 }
02335 /*
02336  Now the completion
02337 */
02338 if ( w == ww ) {
02339     ww[-1] = 1;
02340     ww[-2] = 0;
02341     if ( fix > 0 ) {

```

```

02342         for ( i = 0; i < fix; i++ ) *w++ = i;
02343         ww[-2] = fix; /* Bugfix 31-oct-2001. Reported by York Schroeder */
02344     }
02345 }
02346 else {
02347     ww[-1] = groupsize;
02348     ww[-2] = (w-ww)/groupsize;
02349 }
02350 AT.WorkPointer[1] = w - AT.WorkPointer;
02351 AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
02352 return(error);
02353 }
02354
02355 /*
02356 #] DoSymmetrize :
02357 #[ CoSymmetrize :
02358 */
02359
02360 int CoSymmetrize(UBYTE *s) { return(DoSymmetrize(s,SYMMETRIC)); }
02361
02362 /*
02363 #] CoSymmetrize :
02364 #[ CoAntiSymmetrize :
02365 */
02366
02367 int CoAntiSymmetrize(UBYTE *s) { return(DoSymmetrize(s,ANTISYMMETRIC)); }
02368
02369 /*
02370 #] CoAntiSymmetrize :
02371 #[ CoCycleSymmetrize :
02372 */
02373
02374 int CoCycleSymmetrize(UBYTE *s) { return(DoSymmetrize(s,CYCLESYMMETRIC)); }
02375
02376 /*
02377 #] CoCycleSymmetrize :
02378 #[ CoRCycleSymmetrize :
02379 */
02380
02381 int CoRCycleSymmetrize(UBYTE *s) { return(DoSymmetrize(s,RCYCLESYMMETRIC)); }
02382
02383 /*
02384 #] CoRCycleSymmetrize :
02385 #[ CoWrite :
02386 */
02387
02388 int CoWrite(UBYTE *s)
02389 {
02390     GETIDENTITY
02391     UBYTE *option;
02392     KEYWORDV *key;
02393     option = s;
02394     if ( ( ( s = SkipAName(s) ) == 0 ) || *s != 0 ) {
02395         MesPrint("&Proper use of write statement is: write option");
02396         return(1);
02397     }
02398     key = (KEYWORDV *)FindInKeyWord(option,(KEYWORD
02399 *)writeoptions,sizeof(writeoptions)/sizeof(KEYWORD));
02400     if ( key == 0 ) {
02401         MesPrint("&Unrecognized option in write statement");
02402         return(1);
02403     }
02404     *key->var = key->type;
02405     AR.SortType = AC.SortType;
02406     return(0);
02407 }
02408
02409 /*
02410 #] CoWrite :
02411 #[ CoNWrite :
02412 */
02413
02414 int CoNWrite(UBYTE *s)
02415 {
02416     GETIDENTITY
02417     UBYTE *option;
02418     KEYWORDV *key;
02419     option = s;
02420     if ( ( ( s = SkipAName(s) ) == 0 ) || *s != 0 ) {
02421         MesPrint("&Proper use of nwrite statement is: nwrite option");
02422         return(1);
02423     }
02424     key = (KEYWORDV *)FindInKeyWord(option,(KEYWORD
02425 *)writeoptions,sizeof(writeoptions)/sizeof(KEYWORD));
02426     if ( key == 0 ) {
02427         MesPrint("&Unrecognized option in nwrite statement");
02428         return(1);
02429     }

```

```

02427     }
02428     *key->var = key->flags;
02429     AR.SortType = AC.SortType;
02430     return(0);
02431 }
02432
02433 /*
02434  #] CoNWrite :
02435  #[ CoRatio :
02436 */
02437
02438 static WORD ratstring[6] = { TYPEOPERATION, 6, RATIO, 0, 0, 0 };
02439
02440 int CoRatio(UBYTE *s)
02441 {
02442     UBYTE c, *t;
02443     int i, type, error = 0;
02444     WORD numsym, *rs;
02445     rs = ratstring+3;
02446     for ( i = 0; i < 3; i++ ) {
02447         if ( *s ) {
02448             t = s;
02449             s = SkipAName(s);
02450             c = *s; *s = 0;
02451             if ( ( ( type = GetName(AC.varnames,t,&numsym,WITHAUTO) ) != CSYMBOL )
02452                 && type != CDUBIOUS ) {
02453                 MesPrint("%s is not a symbol",t);
02454                 error = 4;
02455                 if ( type < 0 ) numsym = AddSymbol(t,-MAXPOWER,MAXPOWER,0,0);
02456             }
02457             *s = c;
02458             if ( *s == ',' ) s++;
02459         }
02460         else {
02461             if ( error == 0 )
02462                 MesPrint("&The ratio statement needs three symbols for its arguments");
02463             error++;
02464             numsym = 0;
02465         }
02466         *rs++ = numsym;
02467     }
02468     AddNtoL(6, ratstring);
02469     return(error);
02470 }
02471
02472 /*
02473  #] CoRatio :
02474  #[ CoRedefine :
02475
02476  We have a preprocessor variable and a (new) value for it.
02477  This value is inside a string that must be stored.
02478 */
02479
02480 int CoRedefine(UBYTE *s)
02481 {
02482     UBYTE *name, c, *args = 0;
02483     int numprevar;
02484     WORD code[2];
02485     name = s;
02486     if ( FG.cTable[*s] || ( s = SkipAName(s) ) == 0 || s[-1] == '_' ) {
02487         MesPrint("&Illegal name for preprocessor variable in redefine statement");
02488         return(1);
02489     }
02490     c = *s; *s = 0;
02491     for ( numprevar = NumPre-1; numprevar >= 0; numprevar-- ) {
02492         if ( StrCmp(name, PreVar[numprevar].name) == 0 ) break;
02493     }
02494     if ( numprevar < 0 ) {
02495         MesPrint("&There is no preprocessor variable with the name '%s'", name);
02496         *s = c;
02497         return(1);
02498     }
02499     *s = c;
02500
02501 /*
02502  The next code worries about arguments.
02503  It is a direct copy of the code in TheDefine in the preprocessor.
02504 */
02505     if ( *s == '(' ) { /* arguments. scan for correctness */
02506         s++; args = s;
02507         for (;;) {
02508             if ( chartype[*s] != 0 ) goto illarg;
02509             s++;
02510             while ( chartype[*s] <= 1 ) s++;
02511             while ( *s == ' ' || *s == '\t' ) s++;
02512             if ( *s == ')' ) break;
02513             if ( *s != ',' ) goto illargs;

```

```

02514         while ( *s == ' ' || *s == '\\t' ) s++;
02515     }
02516     *s++ = 0;
02517     while ( *s == ' ' || *s == '\\t' ) s++;
02518 }
02519 while ( *s == ',' ) s++;
02520 if ( *s != '"' ) {
02521     encl: MesPrint("&Value for %s should be enclosed in double quotes"
02522         ,PreVar[numprevar].name);
02523     return(1);
02524 }
02525 s++; name = s; /* actually name points to the new string */
02526 while ( *s && *s != '"' ) { if ( *s == '\\\\' ) s++; s++; }
02527 if ( *s != '"' ) goto encl;
02528 *s = 0;
02529 code[0] = TYPEREDEFPRE; code[1] = numprevar;
02530 /*
02531     AddComString(2,code,name,0);
02532 */
02533     Add2ComStrings(2,code,name,args);
02534     *s = '"';
02535 #ifdef PARALLELCODE
02536 /*
02537     Now we prepare the input numbering system for pthreads.
02538     We need a list of preprocessor variables that are redefined in this
02539     module.
02540 */
02541     {
02542         int j;
02543         WORD *newpf;
02544         LONG *newin;
02545         for ( j = 0; j < AC.numpfirstnum; j++ ) {
02546             if ( numprevar == AC.pfirstnum[j] ) break;
02547         }
02548         if ( j >= AC.numpfirstnum ) { /* add to list */
02549             if ( j >= AC.sizepfirstnum ) {
02550                 if ( AC.sizepfirstnum <= 0 ) { AC.sizepfirstnum = 10; }
02551                 else { AC.sizepfirstnum = 2 * AC.sizepfirstnum; }
02552                 newin = (LONG *)Malloc1(AC.sizepfirstnum*(sizeof(WORD)+sizeof(LONG)),"AC.pfirstnum");
02553                 newpf = (WORD *) (newin+AC.sizepfirstnum);
02554                 for ( j = 0; j < AC.numpfirstnum; j++ ) {
02555                     newpf[j] = AC.pfirstnum[j];
02556                     newin[j] = AC.inputnumbers[j];
02557                 }
02558                 if ( AC.inputnumbers ) M_free(AC.inputnumbers,"AC.pfirstnum");
02559                 AC.inputnumbers = newin;
02560                 AC.pfirstnum = newpf;
02561             }
02562             AC.pfirstnum[AC.numpfirstnum] = numprevar;
02563             AC.inputnumbers[AC.numpfirstnum] = -1;
02564             AC.numpfirstnum++;
02565         }
02566     }
02567 #endif
02568     return(0);
02569 illarg:;
02570     MesPrint("&Illegally formed name in argument of redefine statement");
02571     return(1);
02572 illargs:;
02573     MesPrint("&Illegally formed arguments in redefine statement");
02574     return(1);
02575 }
02576
02577 /*
02578     #] CoRedefine :
02579     #[ CoRenumber :
02580
02581     renumber    or renumber,0    Only exchanges (n^2 until no improvement)
02582     renumber,1    All permutations (could be slow)
02583 */
02584
02585 int CoRenumber(UBYTE *s)
02586 {
02587     int x;
02588     UBYTE *inp;
02589     while ( *s == ',' ) s++;
02590     inp = s;
02591     if ( *s == 0 ) { x = 0; }
02592     else ParseNumber(x,s)
02593     if ( *s == 0 && x >= 0 && x <= 1 ) {
02594         Add3Com(TYPERENUMBER,x);
02595         return(0);
02596     }
02597     MesPrint("&Illegal argument in Renumber statement: '%s'",inp);
02598     return(1);
02599 }
02600

```



```

02601 /*
02602     #] CoReNumber :
02603     #[ CoSum :
02604 */
02605
02606 int CoSum(UBYTE *s)
02607 {
02608     CBUF *C = cbuf+AC.cbunum;
02609     UBYTE *ss = 0, c, *t;
02610     int error = 0, i = 0, type, x;
02611     WORD numindex,number;
02612     while ( *s ) {
02613         t = s;
02614         if ( *s == '$' ) {
02615             t++; s++; while ( FG.cTable[*s] < 2 ) s++;
02616             c = *s; *s = 0;
02617             if ( ( number = GetDollar(t) ) < 0 ) {
02618                 MesPrint("&Undefined variable %s",t);
02619                 if ( !error ) error = 1;
02620                 number = AddDollar(t,0,0,0);
02621             }
02622             numindex = -number;
02623         }
02624         else {
02625             if ( ( s = SkipAName(s) ) == 0 ) return(1);
02626             c = *s; *s = 0;
02627             if ( ( ( type = GetOName(AC.exprnames,t,&numindex,NOAUTO) ) != NAMENOTFOUND )
02628                 || ( ( type = GetOName(AC.varnames,t,&numindex,WITHAUTO) ) != CINDEX ) ) {
02629                 if ( type != NAMENOTFOUND ) error = NameConflict(type,t);
02630                 else {
02631                     MesPrint("&%s should have been declared as an index",t);
02632                     error = 1;
02633                     numindex = AddIndex(s,AC.lDefDim,AC.lDefDim4) + AM.OffsetIndex;
02634                 }
02635             }
02636         }
02637         Add3Com(TYPESUM,numindex);
02638         i = 3; *s = c;
02639         if ( *s == 0 ) break;
02640         if ( *s != ',' ) {
02641             MesPrint("&Illegal separator between objects in sum statement.");
02642             return(1);
02643         }
02644         s++;
02645         if ( FG.cTable[*s] == 0 || *s == '[' || *s == '$' ) {
02646             while ( FG.cTable[*s] == 0 || *s == '[' || *s == '$' ) {
02647                 if ( *s == '$' ) {
02648                     s++;
02649                     ss = t = s;
02650                     while ( FG.cTable[*s] < 2 ) s++;
02651                     c = *s; *s = 0;
02652                     if ( ( number = GetDollar(t) ) < 0 ) {
02653                         MesPrint("&Undefined variable %s",t);
02654                         if ( !error ) error = 1;
02655                         number = AddDollar(t,0,0,0);
02656                     }
02657                     numindex = -number;
02658                 }
02659                 else {
02660                     ss = t = s;
02661                     if ( ( s = SkipAName(s) ) == 0 ) return(1);
02662                     c = *s; *s = 0;
02663                     if ( ( ( type = GetOName(AC.exprnames,t,&numindex,NOAUTO) ) != NAMENOTFOUND )
02664                         || ( ( type = GetOName(AC.varnames,t,&numindex,WITHAUTO) ) != CINDEX ) ) {
02665                         if ( type != NAMENOTFOUND ) error = NameConflict(type,t);
02666                         else {
02667                             MesPrint("&%s should have been declared as an index",t);
02668                             error = 1;
02669                             numindex = AddIndex(s,AC.lDefDim,AC.lDefDim4) + AM.OffsetIndex;
02670                         }
02671                     }
02672                 }
02673                 AddToCB(C,numindex)
02674                 i++;
02675                 C->Pointer[-i+1] = i;
02676                 *s = c;
02677                 if ( *s == 0 ) return(error);
02678                 if ( *s != ',' ) {
02679                     MesPrint("&Illegal separator between objects in sum statement.");
02680                     return(1);
02681                 }
02682                 s++;
02683             }
02684             if ( FG.cTable[*s] == 1 ) {
02685                 C->Pointer[-i+1]--; C->Pointer--; s = ss;
02686             }
02687         }

```

```

02688     else if ( FG.cTable[*s] == 1 ) {
02689         while ( FG.cTable[*s] == 1 ) {
02690             t = s;
02691             x = *s++ - '0';
02692             while( FG.cTable[*s] == 1 ) x = 10*x + *s++ - '0';
02693             if ( *s && *s != ',' ) {
02694                 MesPrint("&%s is not a legal fixed index",t);
02695                 return(1);
02696             }
02697             else if ( x >= AM.OffsetIndex ) {
02698                 MesPrint("&%d is too large to be a fixed index",x);
02699                 error = 1;
02700             }
02701             else {
02702                 AddToCB(C,x)
02703                 i++;
02704                 C->Pointer[-i] = TYPESUMFIX;
02705                 C->Pointer[-i+1] = i;
02706             }
02707             if ( *s == 0 ) break;
02708             s++;
02709         }
02710     }
02711     else {
02712         MesPrint("&Illegal object in sum statement");
02713         error = 1;
02714     }
02715 }
02716 return(error);
02717 }
02718
02719 /*
02720 #] CoSum :
02721 #[ CoToTensor :
02722 */
02723
02724 static WORD cttarray[7] = { TYPEOPERATION,7,TENVEC,0,0,1,0 };
02725
02726 int CoToTensor(UBYTE *s)
02727 {
02728     UBYTE c, *t;
02729     int type, j, nargs, error = 0;
02730     WORD number, dol[2] = { 0, 0 };
02731     cttarray[1] = 6; /* length */
02732     cttarray[3] = 0; /* tensor */
02733     cttarray[4] = 0; /* vector */
02734     cttarray[5] = 1; /* option flags */
02735     /* cttarray[6] = 0; set veto */
02736     /*
02737     Count the number of the arguments. The validity of them is not checked here.
02738     */
02739     nargs = 0;
02740     t = s;
02741     for (;;) {
02742         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02743         if ( *s == 0 ) break;
02744         if ( *s == '!' ) {
02745             s++;
02746             if ( *s == '[' ) {
02747                 SKIPBRA2(s)
02748                 s++;
02749             } else {
02750                 if ( ( s = SkipAName(s) ) == 0 ) goto syntax_error;
02751             }
02752         } else {
02753             if ( ( s = SkipAName(s) ) == 0 ) goto syntax_error;
02754         }
02755         nargs++;
02756     }
02757     if ( nargs < 2 ) goto not_enough_arguments;
02758     s = t;
02759     /*
02760     Parse options, which are given as the arguments except the last two.
02761     */
02762     for ( j = 2; j < nargs; j++ ) {
02763         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02764         if ( *s == '!' ) {
02765             /*
02766             Handle !set or !{vector,...}. Note: If two or more sets are
02767             specified, then only the last one is used.
02768             */
02769             s++;
02770             cttarray[1] = 7;
02771             cttarray[5] |= 8;
02772             if ( FG.cTable[*s] == 0 || *s == '[' || *s == '_' ) {
02773                 t = s;
02774                 if ( ( s = SkipAName(s) ) == 0 ) goto syntax_error;

```

```

02775         c = *s; *s = 0;
02776         type = GetName(AC.varnames,t,&number,WITHAUTO);
02777         if ( type == CVECTOR ) {
02778             /*
02779                 As written in the manual, "!p" (without "{}") should work.
02780             */
02781             cttarray[6] = DoTempSet(t,s);
02782             *s = c;
02783             goto check_tempset;
02784         }
02785         else if ( type != CSET ) {
02786             MesPrint("&%s is not the name of a set or a vector",t);
02787             error = 1;
02788         }
02789         *s = c;
02790         cttarray[6] = number;
02791     }
02792     else if ( *s == '{' ) {
02793         t = ++s; SKIPBRA2(s) *s = 0;
02794         cttarray[6] = DoTempSet(t,s);
02795         *s++ = '}';
02796     check_tempset:
02797         if ( cttarray[6] < 0 ) {
02798             error = 1;
02799         }
02800         if ( AC.wildflag ) {
02801             MesPrint("&Improper use of wildcard(s) in set specification");
02802             error = 1;
02803         }
02804     }
02805     } else {
02806         /*
02807             Other options.
02808         */
02809         t = s;
02810         if ( ( s = SkipAName(s) ) == 0 ) goto syntax_error;
02811         c = *s; *s = 0;
02812         if ( StrICmp(t,(UBYTE *)"nosquare") == 0 ) cttarray[5] |= 2;
02813         else if ( StrICmp(t,(UBYTE *)"functions") == 0 ) cttarray[5] |= 4;
02814         else {
02815             MesPrint("&Unrecognized option in ToTensor statement: '%s'",t);
02816             *s = c;
02817             return(1);
02818         }
02819         *s = c;
02820     }
02821 }
02822 /*
02823     Now parse a vector and a tensor. The ordering doesn't matter.
02824 */
02825 for ( j = 0; j < 2; j++ ) {
02826     while ( *s == ' ' || *s == ',' || *s == '\\t' ) s++;
02827     t = s;
02828     if ( ( s = SkipAName(s) ) == 0 ) goto syntax_error;
02829     c = *s; *s = 0;
02830     if ( t[0] == '$' ) {
02831         dol[j] = GetDollar(t+1);
02832         if ( dol[j] < 0 ) dol[j] = AddDollar(t+1,DOLUNDEFINED,0,0);
02833     } else {
02834         type = GetName(AC.varnames,t,&number,WITHAUTO);
02835         if ( type == CVECTOR ) {
02836             cttarray[4] = number + AM.OffsetVector;
02837         }
02838         else if ( type == CFUNCTION && ( functions[number].spec > 0 ) ) {
02839             cttarray[3] = number + FUNCTION;
02840         }
02841         else {
02842             MesPrint("&%s is not a vector or a tensor",t);
02843             error = 1;
02844         }
02845     }
02846     *s = c;
02847 }
02848 if ( cttarray[3] == 0 || cttarray[4] == 0 ) {
02849     if ( dol[0] == 0 && dol[1] == 0 ) {
02850         goto not_enough_arguments;
02851     }
02852     else if ( cttarray[3] ) {
02853         if ( dol[1] ) cttarray[4] = dol[1];
02854         else if ( dol[0] ) cttarray[4] = dol[0];
02855         else {
02856             goto not_enough_arguments;
02857         }
02858     }
02859     else if ( cttarray[4] ) {
02860         if ( dol[1] ) cttarray[3] = -dol[1];
02861         else if ( dol[0] ) cttarray[3] = -dol[0];

```

```

02862         else {
02863             goto not_enough_arguments;
02864         }
02865     }
02866     else {
02867         if ( dol[0] == 0 || dol[1] == 0 ) {
02868             goto not_enough_arguments;
02869         }
02870         else {
02871             cttdarray[3] = -dol[0]; cttdarray[4] = dol[1];
02872         }
02873     }
02874 }
02875 AddNtoL(cttdarray[1],cttdarray);
02876 return(error);
02877
02878 syntax_error:
02879     MesPrint("&Syntax error in ToTensor statement");
02880     return(1);
02881
02882 not_enough_arguments:
02883     MesPrint("&ToTensor statement needs a vector and a tensor");
02884     return(1);
02885 }
02886
02887 /*
02888 #] CoToTensor :
02889 #[ CoToVector :
02890 */
02891
02892 static WORD cttdarray[6] = { TYPEOPERATION,6,TENVEC,0,0,0 };
02893
02894 int CoToVector(UBYTE *s)
02895 {
02896     UBYTE *t, c;
02897     int j, type, error = 0;
02898     WORD number, dol[2];
02899     dol[0] = dol[1] = 0;
02900     cttdarray[3] = cttdarray[4] = cttdarray[5] = 0;
02901     for ( j = 0; j < 2; j++ ) {
02902         t = s;
02903         if ( ( s = SkipAName(s) ) == 0 ) {
02904 proper:         MesPrint("&Arguments of ToVector statement should be a vector and a tensor");
02905                 return(1);
02906             }
02907             c = *s; *s = 0;
02908             if ( *t == '$' ) {
02909                 dol[j] = GetDollar(t+1);
02910                 if ( dol[j] < 0 ) dol[j] = AddDollar(t+1,DOLUNDEFINED,0,0);
02911             }
02912             else if ( ( type = GetName(AC.varnames,t,&number,WITHAUTO) ) == CVECTOR )
02913                 cttdarray[4] = number + AM.OffsetVector;
02914             else if ( type == CFUNCTION && ( functions[number].spec > 0 ) )
02915                 cttdarray[3] = number+FUNCTION;
02916             else {
02917                 MesPrint("&%s is not a vector or a tensor",t);
02918                 error = 1;
02919             }
02920             *s = c; if ( *s && *s != ',' ) goto proper;
02921             if ( *s ) s++;
02922         }
02923         if ( *s != 0 ) goto proper;
02924         if ( cttdarray[3] == 0 || cttdarray[4] == 0 ) {
02925             if ( dol[0] == 0 && dol[1] == 0 ) {
02926                 MesPrint("&ToVector statement needs a vector and a tensor");
02927                 error = 1;
02928             }
02929             else if ( cttdarray[3] ) {
02930                 if ( dol[1] ) cttdarray[4] = dol[1];
02931                 else if ( dol[0] ) cttdarray[4] = dol[0];
02932                 else {
02933                     MesPrint("&ToVector statement needs a vector and a tensor");
02934                     error = 1;
02935                 }
02936             }
02937             else if ( cttdarray[4] ) {
02938                 if ( dol[1] ) cttdarray[3] = -dol[1];
02939                 else if ( dol[0] ) cttdarray[3] = -dol[0];
02940                 else {
02941                     MesPrint("&ToVector statement needs a vector and a tensor");
02942                     error = 1;
02943                 }
02944             }
02945             else {
02946                 if ( dol[0] == 0 || dol[1] == 0 ) {
02947                     MesPrint("&ToVector statement needs a vector and a tensor");
02948                     error = 1;

```

```

02949         }
02950         else {
02951             ctvarray[3] = -dol[0]; ctvarray[4] = dol[1];
02952         }
02953     }
02954 }
02955 AddNtoL(6,ctvarray);
02956 return(error);
02957 }
02958
02959 /*
02960 #] CoToVector :
02961 #[ CoTrace4 :
02962 */
02963
02964 int CoTrace4(UBYTE *s)
02965 {
02966     int error = 0, type, option = CHISHOLM;
02967     UBYTE *t, c;
02968     WORD numindex, one = 1;
02969     KEYWORD *key;
02970     for (;;) {
02971         t = s;
02972         if ( FG.cTable[*s] == 1 ) break;
02973         if ( ( s = SkipAName(s) ) == 0 ) {
02974 proper:      MesPrint("&Proper syntax for Trace4 is 'Trace4[,options],index;'");
02975             return(1);
02976         }
02977         if ( *s == 0 ) break;
02978         c = *s; *s = 0;
02979         if ( ( key = FindKeyWord(t,trace4options,
02980             sizeof(trace4options)/sizeof(KEYWORD)) ) == 0 ) break;
02981         else {
02982             option |= key->type;
02983             option &= ~key->flags;
02984         }
02985         if ( ( *s++ = c ) != ',' ) {
02986             MesPrint("&Illegal separator in Trace4 statement");
02987             return(1);
02988         }
02989         if ( *s == 0 ) goto proper;
02990     }
02991     s = t;
02992     if ( FG.cTable[*s] == 1 ) {
02993 retry:      ParseNumber(numindex,s)
02994         if ( *s != 0 ) {
02995             MesPrint("&Last argument of Trace4 should be an index");
02996             return(1);
02997         }
02998         if ( numindex >= AM.OffsetIndex ) {
02999             MesPrint("&fixed index >= %d. Change value of OffsetIndex in setup file"
03000                 ,AM.OffsetIndex);
03001             return(1);
03002         }
03003     }
03004 }
03005 else if ( *s == '$' ) {
03006     if ( ( type = GetName(AC.dollarnames,s+1,&numindex,NOAUTO) ) == CDOLLAR )
03007         numindex = -numindex;
03008     else {
03009         MesPrint("&%s is undefined",s);
03010         numindex = AddDollar(s+1,DOLINDEX,&one,1);
03011         return(1);
03012     }
03013 tests:    s = SkipAName(s);
03014     if ( *s != 0 ) {
03015         MesPrint("&Trace4 should have a single index or $variable for its argument");
03016         return(1);
03017     }
03018 }
03019 else if ( ( type = GetName(AC.varnames,s,&numindex,WITHAUTO) ) == CINDEX ) {
03020     numindex += AM.OffsetIndex;
03021     goto tests;
03022 }
03023 else if ( type != -1 ) {
03024     if ( type != CDUBIOUS ) {
03025         if ( ( FG.cTable[*s] != 0 ) && ( *s != '[' ) ) {
03026             if ( *s == '+' && FG.cTable[s[1]] == 1 ) { s++; goto retry; }
03027             goto proper;
03028         }
03029         NameConflict(type,s);
03030         type = MakeDubious(AC.varnames,s,&numindex);
03031     }
03032     return(1);
03033 }
03034 else {
03035     MesPrint("&%s is not an index",s);

```

```

03036         numindex = AddIndex(s,AC.lDefDim,AC.lDefDim4) + AM.OffsetIndex;
03037         return(1);
03038     }
03039     if ( error ) return(error);
03040     if ( ( option & CHISHOLM ) != 0 )
03041         Add4Com(TYPECHISHOLM,numindex,(option & ALSOREVERSE));
03042     Add5Com(TYPEOPERATION,TAKETRACE,4 + (option & NOTRICK),numindex);
03043     return(0);
03044 }
03045
03046 /*
03047 #] CoTrace4 :
03048 #[ CoTraceN :
03049 */
03050
03051 int CoTraceN(UBYTE *s)
03052 {
03053     WORD numindex, one = 1;
03054     int type;
03055     if ( FG.cTable[*s] == 1 ) {
03056     retry:
03057         ParseNumber(numindex,s)
03058         if ( *s != 0 ) {
03059     proper:
03060             MesPrint("&TraceN should have a single index for its argument");
03061             return(1);
03062         }
03063         if ( numindex >= AM.OffsetIndex ) {
03064             MesPrint("&fixed index >= %d. Change value of OffsetIndex in setup file"
03065                 ,AM.OffsetIndex);
03066             return(1);
03067         }
03068         else if ( *s == '$' ) {
03069             if ( ( type = GetName(AC.dollarnames,s+1,&numindex,NOAUTO) ) == CDOLLAR )
03070                 numindex = -numindex;
03071             else {
03072                 MesPrint("&%s is undefined",s);
03073                 numindex = AddDollar(s+1,DOLINDEX,&one,1);
03074                 return(1);
03075             }
03076     tests:
03077             s = SkipAName(s);
03078             if ( *s != 0 ) {
03079                 MesPrint("&TraceN should have a single index or $variable for its argument");
03080                 return(1);
03081             }
03082             else if ( ( type = GetName(AC.varnames,s,&numindex,WITHAUTO) ) == CINDEX ) {
03083                 numindex += AM.OffsetIndex;
03084                 goto tests;
03085             }
03086             else if ( type != -1 ) {
03087                 if ( type != CDUBIOUS ) {
03088                     if ( ( FG.cTable[*s] != 0 ) && ( *s != '[' ) ) {
03089                         if ( *s == '+' && FG.cTable[s[1]] == 1 ) { s++; goto retry; }
03090                         goto proper;
03091                     }
03092                     NameConflict(type,s);
03093                     type = MakeDubious(AC.varnames,s,&numindex);
03094                 }
03095                 return(1);
03096             }
03097             else {
03098                 MesPrint("&%s is not an index",s);
03099                 numindex = AddIndex(s,AC.lDefDim,AC.lDefDim4) + AM.OffsetIndex;
03100                 return(1);
03101             }
03102             Add5Com(TYPEOPERATION,TAKETRACE,0,numindex);
03103             return(0);
03104         }
03105     }
03106 /*
03107 #] CoTraceN :
03108 #[ CoChisholm :
03109 */
03110
03111 int CoChisholm(UBYTE *s)
03112 {
03113     int error = 0, type, option = CHISHOLM;
03114     UBYTE *t, c;
03115     WORD numindex, one = 1;
03116     KEYWORD *key;
03117     for (;;) {
03118         t = s;
03119         if ( FG.cTable[*s] == 1 ) break;
03120         if ( ( s = SkipAName(s) ) == 0 ) {
03121     proper:
03122             MesPrint("&Proper syntax for Chisholm is 'Chisholm[,options],index;'");
03123             return(1);

```

```

03123     }
03124     if ( *s == 0 ) break;
03125     c = *s; *s = 0;
03126     if ( ( key = FindKeyWord(t,chisoptions,
03127         sizeof(chisoptions)/sizeof(KEYWORD)) ) == 0 ) break;
03128     else {
03129         option |= key->type;
03130         option &= ~key->flags;
03131     }
03132     if ( ( *s++ = c ) != ',' ) {
03133         MesPrint("&Illegal separator in Chisholm statement");
03134         return(1);
03135     }
03136     if ( *s == 0 ) goto proper;
03137 }
03138 s = t;
03139 if ( FG.cTable[*s] == 1 ) {
03140     ParseNumber(numindex,s)
03141     if ( *s != 0 ) {
03142         MesPrint("&Last argument of Chisholm should be an index");
03143         return(1);
03144     }
03145     if ( numindex >= AM.OffsetIndex ) {
03146         MesPrint("&fixed index >= %d. Change value of OffsetIndex in setup file"
03147             ,AM.OffsetIndex);
03148         return(1);
03149     }
03150 }
03151 else if ( *s == '$' ) {
03152     if ( ( type = GetName(AC.dollarnames,s+1,&numindex,NOAUTO) ) == CDOLLAR )
03153         numindex = -numindex;
03154     else {
03155         MesPrint("&%s is undefined",s);
03156         numindex = AddDollar(s+1,DOLINDEX,&one,1);
03157         return(1);
03158     }
03159 tests: s = SkipAName(s);
03160     if ( *s != 0 ) {
03161         MesPrint("&Chisholm should have a single index or $variable for its argument");
03162         return(1);
03163     }
03164 }
03165 else if ( ( type = GetName(AC.varnames,s,&numindex,WITHAUTO) ) == CINDEX ) {
03166     numindex += AM.OffsetIndex;
03167     goto tests;
03168 }
03169 else if ( type != -1 ) {
03170     if ( type != CDUBIOUS ) {
03171         NameConflict(type,s);
03172         type = MakeDubious(AC.varnames,s,&numindex);
03173     }
03174     return(1);
03175 }
03176 else {
03177     MesPrint("&%s is not an index",s);
03178     numindex = AddIndex(s,AC.lDefDim,AC.lDefDim4) + AM.OffsetIndex;
03179     return(1);
03180 }
03181 if ( error ) return(error);
03182 Add4Com(TYPECHISHOLM,numindex,(option & ALSOREVERSE));
03183 return(0);
03184 }
03185
03186 /*
03187 #] CoChisholm :
03188 #[ DoChain :
03189
03190 Syntax: Chainxx functionname;
03191 */
03192
03193 int DoChain(UBYTE *s, int option)
03194 {
03195     WORD numfunc,type;
03196     if ( *s == '$' ) {
03197         if ( ( type = GetName(AC.dollarnames,s+1,&numfunc,NOAUTO) ) == CDOLLAR )
03198             numfunc = -numfunc;
03199         else {
03200             MesPrint("&%s is undefined",s);
03201             numfunc = AddDollar(s+1,DOLINDEX,&one,1);
03202             return(1);
03203         }
03204 tests: s = SkipAName(s);
03205         if ( *s != 0 ) {
03206             MesPrint("&ChainIn/ChainOut should have a single function or $variable for its argument");
03207             return(1);
03208         }
03209     }

```

```

03210     else if ( ( type = GetName(AC.varnames,s,&numfunc,WITHAUTO) ) == CFUNCTION ) {
03211         numfunc += FUNCTION;
03212         goto tests;
03213     }
03214     else if ( type != -1 ) {
03215         if ( type != CDUBIOUS ) {
03216             NameConflict(type,s);
03217             type = MakeDubious(AC.varnames,s,&numfunc);
03218         }
03219         return(1);
03220     }
03221     else {
03222         MesPrint("%s is not a function",s);
03223         numfunc = AddFunction(s,0,0,0,0,0,-1,-1) + FUNCTION;
03224         return(1);
03225     }
03226     Add3Com(option,numfunc);
03227     return(0);
03228 }
03229
03230 /*
03231 #] DoChain :
03232 #[ CoChainin :
03233
03234 Syntax: Chainin functionname;
03235 */
03236
03237 int CoChainin(UBYTE *s)
03238 {
03239     return(DoChain(s,TYPECHAININ));
03240 }
03241
03242 /*
03243 #] CoChainin :
03244 #[ CoChainout :
03245
03246 Syntax: Chainout functionname;
03247 */
03248
03249 int CoChainout(UBYTE *s)
03250 {
03251     return(DoChain(s,TYPECHAINOUT));
03252 }
03253
03254 /*
03255 #] CoChainout :
03256 #[ CoExit :
03257 */
03258
03259 int CoExit(UBYTE *s)
03260 {
03261     UBYTE *name;
03262     WORD code = TYPEEXIT;
03263     while ( *s == ',' ) s++;
03264     if ( *s == 0 ) {
03265         Add3Com(TYPEEXIT,0);
03266         return(0);
03267     }
03268     name = s+1;
03269     s++;
03270     while ( *s ) { if ( *s == '\\\\' ) s++; s++; }
03271     if ( name[-1] != '"' || s[-1] != '"' ) {
03272         MesPrint("&Illegal syntax for exit statement");
03273         return(1);
03274     }
03275     s[-1] = 0;
03276     AddComString(1,&code,name,0);
03277     s[-1] = '"';
03278     return(0);
03279 }
03280
03281 /*
03282 #] CoExit :
03283 #[ CoInParallel :
03284 */
03285
03286 int CoInParallel(UBYTE *s)
03287 {
03288     return(DoInParallel(s,1));
03289 }
03290
03291 /*
03292 #] CoInParallel :
03293 #[ CoNotInParallel :
03294 */
03295
03296 int CoNotInParallel(UBYTE *s)

```



```

03297 {
03298     return(DoInParallel(s,0));
03299 }
03300
03301 /*
03302  #] CoNotInParallel :
03303  #[ DoInParallel :
03304
03305     InParallel;
03306     InParallel,names;
03307     NotInParallel;
03308     NotInParallel,names;
03309 */
03310
03311 int DoInParallel(UBYTE *s, int par)
03312 {
03313     #ifdef PARALLELCODE
03314         EXPRESSIONS e;
03315         WORD i;
03316     #endif
03317     WORD number;
03318     UBYTE *t, c;
03319     int error = 0;
03320     #ifndef WITHPTHREADS
03321         DUMMYUSE(par);
03322     #endif
03323     if ( *s == 0 ) {
03324         AC.inparallelflag = par;
03325     #ifdef PARALLELCODE
03326         for ( i = NumExpressions-1; i >= 0; i-- ) {
03327             e = Expressions+i;
03328             if ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION
03329                 || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEXPRESSION
03330             ) {
03331                 e->partodo = par;
03332             }
03333         }
03334     #endif
03335     }
03336     else {
03337         for(;;) { /* Look for a (comma separated) list of variables */
03338             while ( *s == ',' ) s++;
03339             if ( *s == 0 ) break;
03340             if ( *s == '[' || FG.cTable[*s] == 0 ) {
03341                 t = s;
03342                 if ( ( s = SkipAName(s) ) == 0 ) {
03343                     MesPrint("&Improper name for an expression: '%s'",t);
03344                     return(1);
03345                 }
03346                 c = *s; *s = 0;
03347                 if ( GetName(AC.exprnames,t,&number,NOAUTO) == CEXPRESSION ) {
03348                     #ifdef PARALLELCODE
03349                         e = Expressions+number;
03350                         if ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION
03351                             || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEXPRESSION
03352                         ) {
03353                             e->partodo = par;
03354                         }
03355                     #endif
03356                 }
03357                 else if ( GetName(AC.varnames,t,&number,NOAUTO) != NAMENOTFOUND ) {
03358                     MesPrint("&%s is not an expression",t);
03359                     error = 1;
03360                 }
03361                 *s = c;
03362             }
03363             else {
03364                 MesPrint("&Illegal object in InExpression statement");
03365                 error = 1;
03366                 while ( *s && *s != ',' ) s++;
03367                 if ( *s == 0 ) break;
03368             }
03369         }
03370     }
03371 }
03372 return(error);
03373 }
03374
03375 /*
03376  #] DoInParallel :
03377  #[ CoInExpression :
03378 */
03379
03380 int CoInExpression(UBYTE *s)
03381 {
03382     GETIDENTITY
03383     UBYTE *t, c;

```

```

03384     WORD *w, number;
03385     int error = 0;
03386     w = AT.WorkPointer;
03387     if ( AC.inexprlevel >= MAXNEST ) {
03388         MesPrint("@Nesting of inexpression statements more than %d levels", (WORD)MAXNEST);
03389         return(-1);
03390     }
03391     AC.inexprsumcheck[AC.inexprlevel] = NestingChecksum();
03392     AC.inexprstack[AC.inexprlevel] = cbuf[AC.cbunum].Pointer
03393         - cbuf[AC.cbunum].Buffer + 2;
03394     AC.inexprlevel++;
03395     *w++ = TYPEINEXPRESSION;
03396     w++; w++;
03397     for(;;) { /* Look for a (comma separated) list of variables */
03398         while ( *s == ',' ) s++;
03399         if ( *s == 0 ) break;
03400         if ( *s == '[' || FG.cTable[*s] == 0 ) {
03401             t = s;
03402             if ( ( s = SkipAName(s) ) == 0 ) {
03403                 MesPrint("&Improper name for an expression: '%s'",t);
03404                 return(1);
03405             }
03406             c = *s; *s = 0;
03407             if ( GetName(AC.exprnames,t,&number,NOAUTO) == CEXPRESSION ) {
03408                 *w++ = number;
03409             }
03410             else if ( GetName(AC.varnames,t,&number,NOAUTO) != NAMENOTFOUND ) {
03411                 MesPrint("%s is not an expression",t);
03412                 error = 1;
03413             }
03414             *s = c;
03415         }
03416         else {
03417             MesPrint("&Illegal object in InExpression statement");
03418             error = 1;
03419             while ( *s && *s != ',' ) s++;
03420             if ( *s == 0 ) break;
03421         }
03422     }
03423     AT.WorkPointer[1] = w - AT.WorkPointer;
03424     AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
03425     return(error);
03426 }
03427 /*
03428 #] CoInExpression :
03429 #[ CoEndInExpression :
03430 */
03431 int CoEndInExpression(UBYTE *s)
03432 {
03433     CBUF *C = cbuf+AC.cbunum;
03434     while ( *s == ',' ) s++;
03435     if ( *s ) {
03436         MesPrint("&Illegal syntax for EndInExpression statement");
03437         return(1);
03438     }
03439     if ( AC.inexprlevel <= 0 ) {
03440         MesPrint("&EndInExpression without corresponding InExpression statement");
03441         return(1);
03442     }
03443     AC.inexprlevel--;
03444     cbuf[AC.cbunum].Buffer[AC.inexprstack[AC.inexprlevel]] = C->numlhs;
03445     if ( AC.inexprsumcheck[AC.inexprlevel] != NestingChecksum() ) {
03446         MesNesting();
03447         return(1);
03448     }
03449     return(0);
03450 }
03451 }
03452 /*
03453 #] CoEndInExpression :
03454 #[ CoSetExitFlag :
03455 */
03456 int CoSetExitFlag(UBYTE *s)
03457 {
03458     if ( *s ) {
03459         MesPrint("&Illegal syntax for the SetExitFlag statement");
03460         return(1);
03461     }
03462     Add2Com(TYPESETEXIT);
03463     return(0);
03464 }
03465 }
03466 /*
03467 #] CoSetExitFlag :

```

```

03471     #[ CoTryReplace :
03472     /*
03473     int CoTryReplace(UBYTE *p)
03474     {
03475         GETIDENTITY
03476         UBYTE *name, c;
03477         WORD *w, error = 0, i, which = -1, c1, minvec = 0;
03478         w = AT.WorkPointer;
03479         *w++ = TYPETRY;
03480         *w++ = 3;
03481         *w++ = 0;
03482         *w++ = REPLACEMENT;
03483         *w++ = FUNHEAD;
03484         FILLFUN(w)
03485     /*
03486     Now we have to read a function argument for the replace_ function.
03487     Current arguments that we allow involve only single arguments
03488     that do not expand further. No brackets!
03489     /*
03490     while ( *p ) {
03491     /*
03492         No numbers yet
03493     /*
03494         if ( *p == '-' && minvec == 0 && which == (CVECTOR+1) ) {
03495             minvec = 1; p++;
03496         }
03497         if ( *p == '[' || FG.cTable[*p] == 0 ) {
03498             name = p;
03499             if ( ( p = SkipAName(p) ) == 0 ) return(1);
03500             c = *p; *p = 0;
03501             i = GetName(AC.varnames,name,&c1,WITHAUTO);
03502             if ( which >= 0 && i >= 0 && i != CDUBIOUS && which != (i+1) ) {
03503                 MesPrint("&Illegal combination of objects in TryReplace");
03504                 error = 1;
03505             }
03506             else if ( minvec && i != CVECTOR && i != CDUBIOUS ) {
03507                 MesPrint("&Currently a - sign can be used only with a vector in TryReplace");
03508                 error = 1;
03509             }
03510             else switch ( i ) {
03511                 case CSYMBOL: *w++ = -SYMBOL; *w++ = c1; break;
03512                 case CVECTOR:
03513                     if ( minvec ) *w++ = -MINVECTOR;
03514                     else *w++ = -VECTOR;
03515                     *w++ = c1 + AM.OffsetVector;
03516                     minvec = 0;
03517                     break;
03518                 case CINDEX: *w++ = -INDEX; *w++ = c1 + AM.OffsetIndex;
03519                     if ( c1 >= AM.WilInd && c == '?' ) { *p++ = c; c = *p; }
03520                     break;
03521                 case CFUNCTION: *w++ = -c1-FUNCTION; break;
03522                 case CDUBIOUS: minvec = 0; error = 1; break;
03523                 default:
03524                     MesPrint("&Illegal object type in TryReplace: %s",name);
03525                     error = 1;
03526                     i = 0;
03527                     break;
03528             }
03529             if ( which < 0 ) which = i+1;
03530             else which = -1;
03531             *p = c;
03532             if ( *p == ',' ) p++;
03533             continue;
03534         }
03535         else {
03536             MesPrint("&Illegal object in TryReplace");
03537             error = 1;
03538             while ( *p && *p != ',' ) {
03539                 if ( *p == '(' ) SKIPBRA3(p)
03540                 else if ( *p == '{' ) SKIPBRA2(p)
03541                 else if ( *p == '[' ) SKIPBRAL(p)
03542                 else p++;
03543             }
03544         }
03545         if ( *p == ',' ) p++;
03546         if ( which < 0 ) which = 0;
03547         else which = -1;
03548     }
03549     if ( which >= 0 ) {
03550         MesPrint("&Odd number of arguments in TryReplace");
03551         error = 1;
03552     }
03553     i = w - AT.WorkPointer;
03554     AT.WorkPointer[1] = i;
03555     AT.WorkPointer[2] = i - 3;
03556     AT.WorkPointer[4] = i - 3;
03557     AddNtoL((int)i,AT.WorkPointer);

```

```

03558     return(error);
03559 }
03560
03561 /*
03562  #] CoTryReplace :
03563  #[ CoModulus :
03564
03565     Old syntax: Modulus [-] number [:number]
03566     New syntax: Modulus [option(s)] number
03567     Options are: NoFunctions/CoefficientsOnly/AlsoFunctions
03568                 PlusMin/Positive
03569                 InverseTable
03570                 PrintPowersOf(number)
03571                 AlsoPowers/NoPowers
03572                 AlsoDollars/NoDollars
03573     Notice: We change the defaults. This may cause problems to some.
03574 */
03575
03576 int CoModulus(UBYTE *inp)
03577 {
03578     GETIDENTITY
03579     int Retval = 0, sign = 1;
03580     UBYTE *p, c;
03581     while ( *inp == ' ' || *inp == '\t' ) inp++;
03582     if ( *inp == 0 ) {
03583         SwitchOff:
03584         if ( AC.modpowers ) M_free(AC.modpowers,"AC.modpowers");
03585         AC.modpowers = 0;
03586         AN.ncmod = AC.ncmod = 0;
03587         if ( AC.halfmod ) M_free(AC.halfmod,"halfmod");
03588         AC.halfmod = 0; AC.nhalfmod = 0;
03589         if ( AC.modinverses ) M_free(AC.modinverses,"modinverses");
03590         AC.modinverses = 0;
03591         AC.modmode = 0;
03592         return(0);
03593     }
03594     #ifdef WITHFLOAT
03595     if ( AT.aux_ != 0 ) {
03596         MesPrint("&Simultaneous use of floating point and modulus arithmetic makes no sense.");
03597         Retval = 1;
03598     }
03599     #endif
03600     AC.modmode = 0;
03601     if ( *inp == '-' ) {
03602         sign = -1;
03603         inp++;
03604     }
03605     else {
03606         while ( FG.cTable[*inp] == 0 ) {
03607             p = inp;
03608             while ( FG.cTable[*inp] == 0 ) inp++;
03609             c = *inp; *inp = 0;
03610             if ( StrICmp(p,(UBYTE *)"nofunctions") == 0 ) {
03611                 AC.modmode &= ~ALSOFUNARGS;
03612             }
03613             else if ( StrICmp(p,(UBYTE *)"alsofunctions") == 0 ) {
03614                 AC.modmode |= ALSOFUNARGS;
03615             }
03616             else if ( StrICmp(p,(UBYTE *)"coefficientsonly") == 0 ) {
03617                 AC.modmode &= ~ALSOFUNARGS;
03618                 AC.modmode &= ~ALSOPOWERS;
03619                 sign = -1;
03620             }
03621             else if ( StrICmp(p,(UBYTE *)"plusmin") == 0 ) {
03622                 AC.modmode |= POSNEG;
03623             }
03624             else if ( StrICmp(p,(UBYTE *)"positive") == 0 ) {
03625                 AC.modmode &= ~POSNEG;
03626             }
03627             else if ( StrICmp(p,(UBYTE *)"inversetable") == 0 ) {
03628                 AC.modmode |= INVERSETABLE;
03629             }
03630             else if ( StrICmp(p,(UBYTE *)"noinversetable") == 0 ) {
03631                 AC.modmode &= ~INVERSETABLE;
03632             }
03633             else if ( StrICmp(p,(UBYTE *)"nodollars") == 0 ) {
03634                 AC.modmode &= ~ALSODOLLARS;
03635             }
03636             else if ( StrICmp(p,(UBYTE *)"alsodollars") == 0 ) {
03637                 AC.modmode |= ALSODOLLARS;
03638             }
03639             else if ( StrICmp(p,(UBYTE *)"printpowersof") == 0 ) {
03640                 *inp = c;
03641                 if ( *inp != '(' ) {
03642                     badsyntax:
03643                     MesPrint("&Bad syntax in argument of PrintPowersOf(number) in Modulus statement");
03644                     return(1);

```

```

03645         }
03646         while ( *inp == ',' || *inp == ' ' || *inp == '\t' ) inp++;
03647         inp++; p = inp;
03648         if ( FG.cTable[*inp] != 1 ) goto badsyntax;
03649         do { inp++; } while ( FG.cTable[*inp] == 1 );
03650         c = *inp; *inp = 0;
03651         if ( GetLong(p, (UWORD *)AC.powmod,&AC.npowmod) ) Retval = -1;
03652         if ( TakeModulus((UWORD *)AC.powmod,&AC.npowmod,AC.cmod,AC.ncmod,NOUNPACK) ) Retval = -1;
03653         if ( AC.npowmod == 0 ) {
03654             MesPrint("&Improper value for generator");
03655             Retval = -1;
03656         }
03657         if ( MakeModTable() ) Retval = -1;
03658         AC.DirtPow = 1;
03659         *inp = c;
03660         while ( *inp == ',' || *inp == ' ' || *inp == '\t' ) inp++;
03661         if ( *inp != ')' ) goto badsyntax;
03662         inp++;
03663         c = *inp;
03664     }
03665     else if ( StrICmp(p, (UBYTE *)"alsopowers") == 0 ) {
03666         AC.modmode |= ALSOPOWERS;
03667         sign = 1;
03668     }
03669     else if ( StrICmp(p, (UBYTE *)"nopowers") == 0 ) {
03670         AC.modmode &= ~ALSOPOWERS;
03671         sign = -1;
03672     }
03673     else {
03674         MesPrint("&Unrecognized option %s in Modulus statement",inp);
03675         return(1);
03676     }
03677     *inp = c;
03678     while ( *inp == ',' || *inp == ' ' || *inp == '\t' ) inp++;
03679     if ( *inp == 0 ) {
03680         MesPrint("&Modulus statement with no value!!!");
03681         return(1);
03682     }
03683 }
03684 }
03685 p = inp;
03686 if ( FG.cTable[*inp] != 1 ) {
03687     MesPrint("&Invalid value for modulus:%s",inp);
03688     if ( AC.modpowers ) M_free(AC.modpowers,"AC.modpowers");
03689     AC.modpowers = 0;
03690     AN.ncmod = AC.ncmod = 0;
03691     if ( AC.halfmod ) M_free(AC.halfmod,"halfmod");
03692     AC.halfmod = 0; AC.nhalfmod = 0;
03693     if ( AC.modinverses ) M_free(AC.modinverses,"modinverses");
03694     AC.modinverses = 0;
03695     return(1);
03696 }
03697 do { inp++; } while ( FG.cTable[*inp] == 1 );
03698 c = *inp; *inp = 0;
03699 Retval = GetLong(p, (UWORD *)AC.cmod,&AC.ncmod);
03700 if ( Retval == 0 && AC.ncmod == 0 ) goto SwitchOff;
03701 if ( sign < 0 ) AC.ncmod = -AC.ncmod;
03702 AN.ncmod = AC.ncmod;
03703 if ( ( AC.modmode & INVERSETABLE ) != 0 ) MakeInverses();
03704 if ( AC.halfmod ) M_free(AC.halfmod,"halfmod");
03705 AC.halfmod = 0; AC.nhalfmod = 0;
03706 return(Retval);
03707 }
03708
03709 /*
03710 #] CoModulus :
03711 #[ CoRepeat :
03712 */
03713
03714 int CoRepeat(UBYTE *inp)
03715 {
03716     int error = 0;
03717     AC.RepSumCheck[AC.RepLevel] = NestingChecksum();
03718     AC.RepLevel++;
03719     if ( AC.RepLevel > AM.RepMax ) {
03720         MesPrint("&Too many repeat levels. Maximum is %d",AM.RepMax);
03721         return(1);
03722     }
03723     Add3Com(TYPEREPEAT,-1) /* Means indefinite */
03724     while ( *inp == ' ' || *inp == ',' || *inp == '\t' ) inp++;
03725     if ( *inp ) {
03726         error = CompileStatement(inp);
03727         if ( CoEndRepeat(inp) ) error = 1;
03728     }
03729     return(error);
03730 }
03731

```

```

03732 /*
03733      #] CoRepeat :
03734      #[ CoEndRepeat :
03735 */
03736
03737 int CoEndRepeat(UBYTE *inp)
03738 {
03739     CBUF *C = cbuf+AC.cbunum;
03740     int level, error = 0, repeatlevel = 0;
03741     DUMMYUSE(inp);
03742     AC.RepLevel--;
03743     if ( AC.RepLevel < 0 ) {
03744         MesPrint("&EndRepeat without Repeat");
03745         AC.RepLevel = 0;
03746         return(1);
03747     }
03748     else if ( AC.RepSumCheck[AC.RepLevel] != NestingChecksum() ) {
03749         MesNesting();
03750         error = 1;
03751     }
03752     level = C->numlhs+1;
03753     while ( level > 0 ) {
03754         if ( C->lhs[--level][0] == TYPEPERPEAT ) {
03755             if ( repeatlevel == 0 ) {
03756                 Add3Com(TYPEENDREPEAT,level)
03757                 return(error);
03758             }
03759             repeatlevel--;
03760         }
03761         else if ( C->lhs[level][0] == TYPEENDREPEAT ) repeatlevel++;
03762     }
03763     return(1);
03764 }
03765
03766 /*
03767      #] CoEndRepeat :
03768      #[ DoBrackets :
03769
03770      Reads in the bracket information.
03771      Storage is in the form of a regular term.
03772      No subterms and arguments are allowed.
03773 */
03774
03775 int DoBrackets(UBYTE *inp, int par)
03776 {
03777     GETIDENTITY
03778     UBYTE *p, *pp, c;
03779     WORD *to, i, type, *w, error = 0;
03780     WORD c1,c2, *WorkSave;
03781     int biflag;
03782     p = inp;
03783     WorkSave = to = AT.WorkPointer;
03784     to++;
03785     if ( AT.BrackBuf == 0 ) {
03786         AR.MaxBracket = 100;
03787         AT.BrackBuf = (WORD *)Malloc1(sizeof(WORD)*(AR.MaxBracket+1),"bracket buffer");
03788     }
03789     *AT.BrackBuf = 0;
03790     AR.BracketOn = 0;
03791     AC.bracketindexflag = 0;
03792     AT.bracketindexflag = 0;
03793     if ( *p == '+' || *p == '-' ) p++;
03794     if ( p[-1] == ',' && *p ) p--;
03795     if ( p[-1] == '+' && *p ) { biflag = 1; if ( *p != ',' ) { *--p = ','; } }
03796     else if ( p[-1] == '-' && *p ) { biflag = -1; if ( *p != ',' ) { *--p = ','; } }
03797     else biflag = 0;
03798     while ( *p == ',' ) {
03799         redo: AR.BracketOn++;
03800         while ( *p == ',' ) p++;
03801         if ( *p == 0 ) break;
03802         if ( *p == '0' ) {
03803             p++; while ( *p == '0' ) p++;
03804             continue;
03805         }
03806         inp = pp = p;
03807         p = SkipAName(p);
03808         if ( p == 0 ) return(1);
03809         c = *p;
03810         *p = 0;
03811         type = GetName(AC.varnames,inp,&c1,WITHAUTO);
03812         if ( c == '.' ) {
03813             if ( type == CVECTOR || type == CDUBIOUS ) {
03814                 *p++ = c;
03815                 inp = p;
03816                 p = SkipAName(p);
03817                 if ( p == 0 ) return(1);
03818                 c = *p;

```

```

03819         *p = 0;
03820         type = GetName(AC.varnames,inp,&c2,WITHAUTO);
03821         if ( type != CVECTOR && type != CDUBIOUS ) {
03822             MesPrint("&Not a vector in dotproduct in bracket statement: %s",inp);
03823             error = 1;
03824         }
03825         else type = CDOTPRODUCT;
03826     }
03827     else {
03828         MesPrint("&Illegal use of . after %s in bracket statement",inp);
03829         error = 1;
03830         *p++ = c;
03831         goto redo;
03832     }
03833 }
03834 switch ( type ) {
03835     case CSYMBOL :
03836         *to++ = SYMBOL; *to++ = 4; *to++ = c1; *to++ = 1; break;
03837     case CVECTOR :
03838         *to++ = INDEX; *to++ = 3; *to++ = AM.OffsetVector + c1; break;
03839     case CFUNCTION :
03840         *to++ = c1+FUNCTION; *to++ = FUNHEAD; *to++ = 0;
03841         FILLFUN3(to)
03842         break;
03843     case CDOTPRODUCT :
03844         *to++ = DOTPRODUCT; *to++ = 5; *to++ = c1 + AM.OffsetVector;
03845         *to++ = c2 + AM.OffsetVector; *to++ = 1; break;
03846     case CDELTA :
03847         *to++ = DELTA; *to++ = 4; *to++ = EMPTYINDEX; *to++ = EMPTYINDEX; break;
03848     case CSET :
03849         *to++ = SETSET; *to++ = 4; *to++ = c1; *to++ = Sets[c1].type; break;
03850     default :
03851         MesPrint("&Illegal bracket request for %s",pp);
03852         error = 1; break;
03853 }
03854 *p = c;
03855 }
03856 if ( *p ) {
03857     MesCerr("separator",p);
03858     AC.BracketNormalize = 0;
03859     AT.WorkPointer = WorkSave;
03860     error = 1;
03861     return(error);
03862 }
03863 *to++ = 1; *to++ = 1; *to++ = 3;
03864 *AT.WorkPointer = to - AT.WorkPointer;
03865 AT.WorkPointer = to;
03866 AC.BracketNormalize = 1;
03867 if ( BracketNormalize(BHEAD WorkSave) ) { error = 1; AR.BracketOn = 0; }
03868 else {
03869     w = WorkSave;
03870     if ( *w == 4 || !*w ) { AR.BracketOn = 0; }
03871     else {
03872         i = *(w+*w-1);
03873         if ( i < 0 ) i = -i;
03874         *w -= i;
03875         i = *w;
03876         if ( i > AR.MaxBracket ) {
03877             WORD *newbuf;
03878             newbuf = (WORD *)Malloc1(sizeof(WORD)*(i+1),"bracket buffer");
03879             AR.MaxBracket = i;
03880             if ( AT.BrackBuf != 0 ) M_free(AT.BrackBuf,"bracket buffer");
03881             AT.BrackBuf = newbuf;
03882         }
03883         to = AT.BrackBuf;
03884         NCOPY(to,w,i);
03885     }
03886 }
03887 AC.BracketNormalize = 0;
03888 if ( par == 1 ) AR.BracketOn = -AR.BracketOn;
03889 if ( error == 0 ) {
03890     AC.bracketindexflag = biflag;
03891     AT.bracketindexflag = biflag;
03892 }
03893 AT.WorkPointer = WorkSave;
03894 return(error);
03895 }
03896 /*
03897 #] DoBrackets :
03898 #[ CoBracket :
03899 */
03900
03901 int CoBracket(UBYTE *inp)
03902 { return(DoBrackets(inp,0)); }
03903
03904 /*
03905

```

```

03906     #] CoBracket :
03907     #[ CoAntiBracket :
03908 */
03909
03910 int CoAntiBracket(UBYTE *inp)
03911 { return(DoBrackets(inp,1)); }
03912
03913 /*
03914     #] CoAntiBracket :
03915     #[ CoMultiBracket :
03916
03917     Syntax:
03918         MultiBracket:{A|B} bracketinfo:...:{A|B} bracketinfo;
03919 */
03920
03921 int CoMultiBracket(UBYTE *inp)
03922 {
03923     GETIDENTITY
03924     int i, error = 0, error1, type, num;
03925     UBYTE *s, c;
03926     WORD *to, *from;
03927
03928     if ( *inp != ':' ) {
03929         MesPrint("&Illegal Multiple Bracket separator: %s",inp);
03930         return(1);
03931     }
03932     inp++;
03933     if ( AC.MultiBracketBuf == 0 ) {
03934         AC.MultiBracketBuf = (WORD **)Mallco1(sizeof(WORD *)*MAXMULTIBRACKETLEVELS,"multi bracket
buffer");
03935         for ( i = 0; i < MAXMULTIBRACKETLEVELS; i++ ) {
03936             AC.MultiBracketBuf[i] = 0;
03937         }
03938     }
03939     else {
03940         for ( i = 0; i < MAXMULTIBRACKETLEVELS; i++ ) {
03941             if ( AC.MultiBracketBuf[i] ) {
03942                 M_free(AC.MultiBracketBuf[i],"bracket buffer i");
03943                 AC.MultiBracketBuf[i] = 0;
03944             }
03945         }
03946         AC.MultiBracketLevels = 0;
03947     }
03948     AC.MultiBracketLevels = 0;
03949 /*
03950     Start with disabling the regular brackets.
03951 */
03952     if ( AT.BrackBuf == 0 ) {
03953         AR.MaxBracket = 100;
03954         AT.BrackBuf = (WORD *)Mallco1(sizeof(WORD)*(AR.MaxBracket+1),"bracket buffer");
03955     }
03956     *AT.BrackBuf = 0;
03957     AR.BracketOn = 0;
03958     AC.bracketindexflag = 0;
03959     AT.bracketindexflag = 0;
03960 /*
03961     Now loop through the various levels, separated by the colons.
03962 */
03963     for ( i = 0; i < MAXMULTIBRACKETLEVELS; i++ ) {
03964         if ( *inp == 0 ) goto RegEnd;
03965 /*
03966         1: skip to ':', determine bracket or antibracket
03967 */
03968         s = inp;
03969         while ( *s && *s != ':' ) {
03970             if ( *s == '[' ) { SKIPBRA1(s) s++; }
03971             else if ( *s == '{' ) { SKIPBRA2(s) s++; }
03972             else s++;
03973         }
03974         c = *s; *s = 0;
03975         if ( StrICont(inp,(UBYTE *)"antibrackets") == 0 ) { type = 1; }
03976         else if ( StrICont(inp,(UBYTE *)"brackets") == 0 ) { type = 0; }
03977         else {
03978             MesPrint("&Illegal (anti)bracket specification in MultiBracket statement");
03979             if ( error == 0 ) error = 1;
03980             goto NextLevel;
03981         }
03982         while ( FG.cTable[*inp] == 0 ) inp++;
03983         if ( *inp != ',' ) {
03984             MesPrint("&Illegal separator after (anti)bracket specification in MultiBracket
statement");
03985             if ( error == 0 ) error = 1;
03986             goto NextLevel;
03987         }
03988         inp++;
03989 /*
03990         2: call DoBrackets.

```



```

03991 */
03992     error1 = DoBrackets(inp, type);
03993     if ( error < 0 ) return(error1);
03994     if ( error1 > error ) error = error1;
03995 /*
03996     3: copy bracket information to the multi bracket arrays
03997 */
03998     if ( AR.BracketOn ) {
03999         num = AT.BrackBuf[0];
04000         to = AC.MultiBracketBuf[i] = (WORD *)Malloc1((num+2)*sizeof(WORD),"bracket buffer i");
04001         from = AT.BrackBuf;
04002         *to++ = AR.BracketOn;
04003         NCOPY(to,from,num);
04004         *to = 0;
04005     }
04006 /*
04007     4: set ready for the next level
04008 */
04009 NextLevel:
04010     *s = c; if ( c == ':' ) s++;
04011     inp = s;
04012     *AT.BrackBuf = 0;
04013     AR.BracketOn = 0;
04014 }
04015 if ( *inp != 0 ) {
04016     MesPrint("&More than %d levels in MultiBracket statement",(WORD)MAXMULTIBRACKETLEVELS);
04017     if ( error == 0 ) error = 1;
04018 }
04019 RegEnd:
04020     AC.MultiBracketLevels = i;
04021     *AT.BrackBuf = 0;
04022     AR.BracketOn = 0;
04023     AC.bracketindexflag = 0;
04024     AT.bracketindexflag = 0;
04025     return(error);
04026 }
04027
04028 /*
04029 #] CoMultiBracket :
04030 #[ CountComp :
04031
04032     This routine reads the count statement. The syntax is:
04033     count minimum,object,size[,object,size]
04034     Objects can be:
04035         symbol
04036         dotproduct
04037         vector
04038         function
04039     Vectors can have the auxiliary flags:
04040         +v +f +d +?setname
04041
04042     Output for the compiler:
04043     TYPECOUNT,size,minimum,objects
04044     with the objects:
04045     SYMBOL,4,number,size
04046     DOTPRODUCT,5,v1,v2,size
04047     FUNCTION,4,number,size
04048     VECTOR,5,number,bits,size or VECTOR,6,number,bits,setnumber,size
04049
04050     Currently only used in the if statement
04051 */
04052
04053 WORD *CountComp(UBYTE *inp, WORD *to)
04054 {
04055     GETIDENTITY
04056     UBYTE *p, c;
04057     WORD *w, mini = 0, type, c1, c2;
04058     int error = 0;
04059     p = inp;
04060     w = to;
04061     AR.Eside = 2;
04062     *w++ = TYPECOUNT;
04063     *w++ = 0;
04064     *w++ = 0;
04065     while ( *p == ',' ) {
04066         p++; inp = p;
04067         if ( *p == '[' || FG.cTable[*p] == 0 ) {
04068             if ( ( p = SkipAName(inp) ) == 0 ) return(0);
04069             c = *p; *p = 0;
04070             type = GetName(AC.varnames,inp,&c1,WITHAUTO);
04071             if ( c == '.' ) {
04072                 if ( type == CVECTOR || type == CDUBIOUS ) {
04073                     *p++ = c;
04074                     inp = p;
04075                     p = SkipAName(p);
04076                     if ( p == 0 ) return(0);
04077                     c = *p;

```

```

04078         *p = 0;
04079         type = GetName(AC.varnames,inp,&c2,WITHAUTO);
04080         if ( type != CVECTOR && type != CDUBIOUS ) {
04081             MesPrint("&Not a vector in dotproduct in if statement: %s",inp);
04082             error = 1;
04083         }
04084         else type = CDOTPRODUCT;
04085     }
04086     else {
04087         MesPrint("&Illegal use of . after %s in if statement",inp);
04088         if ( type == NAMENOTFOUND )
04089             MesPrint("&%s is not a properly declared variable",inp);
04090         error = 1;
04091         *p++ = c;
04092         while ( *p && *p != ')' && *p != ',' ) p++;
04093         if ( *p == ',' && FG.cTable[p[1]] == 1 ) {
04094             p++;
04095             while ( *p && *p != ')' && *p != ',' ) p++;
04096         }
04097         continue;
04098     }
04099 }
04100 *p = c;
04101 switch ( type ) {
04102     case CSYMBOL:
04103         *w++ = SYMBOL; *w++ = 4; *w++ = c1;
04104         if ( *p != ',' ) {
04105             MesCerr("sequence",p);
04106             while ( *p && *p != ')' && *p != ',' ) p++;
04107             error = 1;
04108         }
04109         p++; inp = p;
04110         ParseSignedNumber(mini,p)
04111         if ( FG.cTable[p[-1]] != 1 || ( *p && *p != ')' && *p != ',' ) ) {
04112             while ( *p && *p != ')' && *p != ',' ) p++;
04113             error = 1;
04114             c = *p; *p = 0;
04115             MesPrint("&Improper value in count: %s",inp);
04116             *p = c;
04117             while ( *p && *p != ')' && *p != ',' ) p++;
04118         }
04119         *w++ = mini;
04120         break;
04121     case CFUNCTION:
04122         *w++ = FUNCTION; *w++ = 4; *w++ = c1+FUNCTION; goto Sgetnum;
04123     case CDOTPRODUCT:
04124         *w++ = DOTPRODUCT; *w++ = 5;
04125         *w++ = c2 + AM.OffsetVector;
04126         *w++ = c1 + AM.OffsetVector;
04127         goto Sgetnum;
04128     case CVECTOR:
04129         *w++ = VECTOR; *w++ = 5;
04130         *w++ = c1 + AM.OffsetVector;
04131         if ( *p == ',' ) {
04132             *w++ = VECTBIT | DOTPBIT | FUNBIT;
04133             goto Sgetnum;
04134         }
04135         else if ( *p == '+' ) {
04136             p++;
04137             *w = 0;
04138             while ( *p && *p != ',' ) {
04139                 if ( *p == 'v' || *p == 'V' ) {
04140                     *w |= VECTBIT; p++;
04141                 }
04142                 else if ( *p == 'd' || *p == 'D' ) {
04143                     *w |= DOTPBIT; p++;
04144                 }
04145                 else if ( *p == 'f' || *p == 'F'
04146                     || *p == 't' || *p == 'T' ) {
04147                     *w |= FUNBIT; p++;
04148                 }
04149                 else if ( *p == '?' ) {
04150                     p++; inp = p;
04151                     if ( *p == '{' ) { /* } */
04152                         SKIPBRA2(p)
04153                         if ( p == 0 ) return(0);
04154                         if ( ( c1 = DoTempSet(inp+1,p) ) < 0 ) return(0);
04155                         if ( Sets[c1].type != CFUNCTION ) {
04156                             MesPrint("&set type conflict: Function expected");
04157                             return(0);
04158                         }
04159                         type = CSET;
04160                         c = **p;
04161                     }
04162                     else {
04163                         p = SkipAName(p);
04164                         if ( p == 0 ) return(0);

```

```

04165             c = *p; *p = 0;
04166             type = GetName(AC.varnames,inp,&c1,WITHAUTO);
04167         }
04168         if ( type != CSET && type != CDUBIOUS ) {
04169             MesPrint("&%s is not a set",inp);
04170             error = 1;
04171         }
04172         w[-2] = 6;
04173         *w++ |= SETBIT;
04174         *w++ = c1;
04175         *p = c;
04176         goto Sgetnum;
04177     }
04178     else {
04179         MesCerr("specifier for vector",p);
04180         error = 1;
04181     }
04182 }
04183 w++;
04184 goto Sgetnum;
04185 }
04186 else {
04187     MesCerr("specifier for vector",p);
04188     while ( *p && *p != ')' && *p != ',' ) p++;
04189     error = 1;
04190     *w++ = VECTBIT | DOTPBIT | FUNBIT;
04191     goto Sgetnum;
04192 }
04193 case CDUBIOUS:
04194     goto skipfield;
04195 default:
04196     *p = 0;
04197     MesPrint("&%s is not a symbol, function, vector or dotproduct",inp);
04198     error = 1;
04199 skipfield:
04200     while ( *p && *p != ')' && *p != ',' ) p++;
04201     if ( *p && FG.cTable[p[1]] == 1 ) {
04202         p++;
04203         while ( *p && *p != ')' && *p != ',' ) p++;
04204     }
04205     break;
04206 }
04207 else {
04208     MesCerr("name",p);
04209     while ( *p && *p != ',' ) p++;
04210     error = 1;
04211 }
04212 }
04213 to[1] = w-to;
04214 if ( *p == ')' ) p++;
04215 if ( *p ) { MesCerr("end of statement",p); return(0); }
04216 if ( error ) return(0);
04217 return(w);
04218 }
04219
04220 /*
04221 #] CountComp :
04222 #[ CoIf :
04223
04224     Reads the if statement: There must be a pair of parentheses.
04225     Much work is delegated to the routines in compi2 and CountComp.
04226     The goto is kept hanging as it is forward.
04227     The address in which the label must be written is pushed on
04228     the AC.IfStack.
04229
04230     Here we allow statements of the type
04231     if ( condition ) single statement;
04232     compile the if statement.
04233     test character at end
04234     if not ; or )
04235     copy the statement after the proper parenthesis to the
04236     beginning of the AC.iBuffer.
04237     Have it compiled.
04238     generate an endif statement.
04239 */
04240
04241 static UWORD *CIsratC = 0;
04242
04243 int CoIf(UBYTE *inp)
04244 {
04245     GETIDENTITY
04246     int error = 0, level;
04247     WORD *w, *ww, *u, *s, *OldWork, *OldSpace = AT.WorkSpace;
04248     WORD gotexp = 0; /* Indicates whether there can be a condition */
04249     WORD lenpp, lenlev, ncoef, i, number;
04250     UBYTE *p, *pp, *ppp, c;
04251     CBUF *C = cbuf+AC.cbunum;

```

```

04252     LONG x;
04253 #ifdef WITHFLOAT
04254     int spec;
04255 #endif
04256     if ( *inp == '(' && inp[1] == ',' ) inp += 2;
04257     else if ( *inp == '(' ) inp++; /* Usually we enter at the bracket */
04258
04259     if ( CIsratC == 0 )
04260         CIsratC = (UWORD *)Malloc1((AM.MaxTal+2)*sizeof(UWORD), "CoIf");
04261     lenpp = 0;
04262     lenlev = 1;
04263     if ( AC.IfLevel >= AC.MaxIf ) DoubleIfBuffers();
04264     AC.IfCount[lenpp++] = 0;
04265 /*
04266     IfStack is used for organizing the 'go to' for the various if levels
04267 */
04268     *AC.IfStack++ = C->Pointer-C->Buffer+2;
04269 /*
04270     IfSumCheck is used to test for illegal nesting of if, argument or repeat.
04271 */
04272     AC.IfSumCheck[AC.IfLevel] = NestingChecksum();
04273     AC.IfLevel++;
04274     w = OldWork = AT.WorkPointer;
04275     *w++ = TYPEIF;
04276     w += 2;
04277     p = inp;
04278     for(;;) {
04279         inp = p;
04280         level = 0;
04281 ReDo:
04282         if ( FG.cTable[*p] == 1 ) { /* Number */
04283             if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04284 #ifdef WITHFLOAT
04285             pp = CheckFloat(p,&spec);
04286             if ( pp > p ) { /* Got one */
04287 HaveFloat:
04288                 if ( spec == -1 ) {
04289                     MesPrint("&The floating point system has not been started: %s",p);
04290                     if ( !error ) error = 1;
04291                 }
04292                 else {
04293                     WORD *ow = AT.WorkPointer;
04294                     AT.WorkPointer = w;
04295                     c = *pp; *pp = 0;
04296                     ReadFloat((SBYTE *)p); /* Is now at AT.WorkPointer */
04297                     *pp = c;
04298                     p = pp;
04299                     AT.WorkPointer[0] = IFFLOATNUMBER;
04300                     w = AT.WorkPointer + AT.WorkPointer[1];
04301                     AT.WorkPointer = ow;
04302                     if ( level ) w[FUNHEAD+3] = -w[FUNHEAD+3];
04303                 }
04304                 goto DoneWithNumber;
04305             }
04306 /*
04307             Notation: Same as FLOATFUN but FLOATFUN replaced by IFFLOATNUMBER.
04308 */
04309 #endif
04310             u = w;
04311             *w++ = LONGNUMBER;
04312 /*
04313             Notation:
04314             LONGNUMBER,size,reducedsize*sign,numerator,denominator
04315             with the length of denominator and numerator equal to reducedsize
04316 */
04317             w += 2;
04318             if ( GetLong(p, (UWORD *)w,&ncoef) ) { ncoef = 1; error = 1; }
04319             w[-1] = ncoef;
04320             while ( FG.cTable[***p] == 1 );
04321             if ( *p == '/' ) {
04322                 p++;
04323                 if ( FG.cTable[*p] != 1 ) {
04324                     MesCerr("sequence",p); error = 1; goto OnlyNum;
04325                 }
04326                 if ( GetLong(p,CIsratC,&ncoef) ) {
04327                     ncoef = 1; error = 1;
04328                 }
04329                 while ( FG.cTable[***p] == 1 );
04330                 if ( ncoef == 0 ) {
04331                     MesPrint("&Division by zero!");
04332                     error = 1;
04333                 }
04334             }
04335             else {
04336                 if ( w[-1] != 0 ) {
04337                     if ( Simplify(BHEAD (UWORD *)w,(WORD *) (w-1),
04338                         CIsratC,&ncoef) ) error = 1;

```

```

04339         else {
04340             i = w[-1];
04341             if ( i >= ncoef ) {
04342                 i = w[-1];
04343                 w += i;
04344                 i -= ncoef;
04345                 s = (WORD *)CIscratC;
04346                 NCOPY(w,s,ncoef);
04347                 while ( --i >= 0 ) *w++ = 0;
04348             }
04349             else {
04350                 w += i;
04351                 i = ncoef - i;
04352                 while ( --i >= 0 ) *w++ = 0;
04353                 s = (WORD *)CIscratC;
04354                 NCOPY(w,s,ncoef);
04355             }
04356         }
04357     }
04358 }
04359 }
04360 else {
04361 OnlyNum:
04362     w += ncoef;
04363     if ( ncoef > 0 ) {
04364         ncoef--; *w++ = 1;
04365         while ( --ncoef >= 0 ) *w++ = 0;
04366     }
04367 }
04368 u[1] = WORDDIF(w,u);
04369 u[2] = (u[1] - 3)/2;
04370 if ( level ) u[2] = -u[2];
04371 #ifdef WITHFLOAT
04372 DoneWithNumber:
04373 #endif
04374     gotexp = 1;
04375 }
04376 else if ( *p == '+' ) { p++; goto ReDo; }
04377 else if ( *p == '-' ) { level ^= 1; p++; goto ReDo; }
04378 else if ( *p == 'c' || *p == 'C' ) { /* Count or Coefficient */
04379     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04380     while ( FG.cTable[***p] == 0 );
04381     c = *p; *p = 0;
04382     if ( !StrICmp(inp, (UBYTE *) "count" ) ) {
04383         *p = c;
04384         if ( c != '(' ) {
04385             MesPrint("&no ( after count");
04386             error = 1;
04387             goto endofif;
04388         }
04389         inp = p;
04390         SKIPBRA4(p);
04391         c = ***p; *p = 0; *inp = ',';
04392         w = CountComp(inp,w);
04393         *p = c; *inp = '(';
04394         if ( w == 0 ) { error = 1; goto endofif; }
04395         gotexp = 1;
04396     }
04397     else if ( ConWord(inp, (UBYTE *) "coefficient" ) && ( p - inp ) > 3 ) {
04398         *w++ = COEFFI;
04399         *w++ = 2;
04400         *p = c;
04401         gotexp = 1;
04402     }
04403     else goto NoGood;
04404     inp = p;
04405 }
04406 else if ( *p == 'm' || *p == 'M' ) { /* match */
04407     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04408     while ( !FG.cTable[***p] );
04409     c = *p; *p = 0;
04410     if ( !StrICmp(inp, (UBYTE *) "match" ) ) {
04411         *p = c;
04412         if ( c != '(' ) {
04413             MesPrint("&no ( after match");
04414             error = 1;
04415             goto endofif;
04416         }
04417         p++; inp = p;
04418         SKIPBRA4(p);
04419         *p = '=';
04420     }
04421     /*
04422     Now we can call the reading of the lhs of an id statement.
04423     This has to be modified in the future.
04424     */
04425     AT.WorkSpace = AT.WorkPointer = w;
    ppp = inp;

```

```

04426         while ( FG.cTable[*ppp] == 0 && ppp < p ) ppp++;
04427         if ( *ppp == ',' ) AC.idoption = 0;
04428         else AC.idoption = SUBMULTI;
04429         level = CoIdExpression(inp,TYPEIF);
04430         AT.WorkSpace = OldSpace;
04431         AT.WorkPointer = OldWork;
04432         if ( level != 0 ) {
04433             if ( level < 0 ) { error = -1; goto endofif; }
04434             error = 1;
04435         }
04436         /*
04437         If we pop numlhs we are in good shape
04438         */
04439         s = u = C->lhs[C->numlhs];
04440         while ( u < C->Pointer ) *w++ = *u++;
04441         C->numlhs--; C->Pointer = s;
04442         *p++ = ',';
04443         inp = p;
04444         gotexp = 1;
04445     }
04446     else if ( !StrICmp(inp, (UBYTE *) "multipleof") ) {
04447         if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04448         *p = c;
04449         if ( c != '(' ) {
04450             MesPrint("&no ( after multipleof");
04451             error = 1; goto endofif;
04452         }
04453         p++;
04454         if ( FG.cTable[*p] != 1 ) {
04455             MesPrint("&multipleof needs a short positive integer argument");
04456             error = 1; goto endofif;
04457         }
04458         ParseNumber(x,p)
04459         if ( *p != ')' || x <= 0 || x > MAXPOSITIVE ) goto Nomulof;
04460         p++;
04461         *w++ = MULTIPLEOF; *w++ = 3; *w++ = (WORD)x;
04462         inp = p;
04463         gotexp = 1;
04464     }
04465     else {
04466         NoGood: MesPrint("&Unrecognized word: %s",inp);
04467         *p = c;
04468         error = 1;
04469         level = 0;
04470         if ( c == '(' ) SKIPBRA4(p)
04471         inp = ++p;
04472         gotexp = 1;
04473     }
04474 }
04475 else if ( *p == 'f' || *p == 'F' ) { /* FindLoop */
04476     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04477     while ( FG.cTable[**p] == 0 );
04478     c = *p; *p = 0;
04479     if ( !StrICmp(inp, (UBYTE *) "findloop") ) {
04480         *p = c;
04481         if ( c != '(' ) {
04482             MesPrint("&no ( after findloop");
04483             error = 1;
04484             goto endofif;
04485         }
04486         inp = p;
04487         SKIPBRA4(p);
04488         c = **p; *p = 0; *inp = ',';
04489         if ( CoFindLoop(inp) ) { error = 1; goto endofif; }
04490         s = u = C->lhs[C->numlhs];
04491         while ( u < C->Pointer ) *w++ = *u++;
04492         C->numlhs--; C->Pointer = s;
04493         *p = c; *inp = '(';
04494         if ( w == 0 ) { error = 1; goto endofif; }
04495         gotexp = 1;
04496     }
04497     else if ( !StrICmp(inp, (UBYTE *) "flag") ) {
04498         UBYTE cc = c, *pppp;
04499         *p = cc;
04500         if ( cc != '(' ) {
04501             MesPrint("&no ( after flag");
04502             error = 1;
04503             goto endofif;
04504         }
04505         inp = p;
04506         SKIPBRA4(p);
04507         cc = **p; *p = 0; *inp = ','; pppp = p;
04508         ww = w;
04509         *w++ = IFUSERFLAG; *w++ = 0;
04510         while ( *inp ) {
04511             int x = 0;
04512             while ( *inp == ',' ) inp++;

```

```

04513         if ( *inp == 0 || *inp == ')' ) break;
04514         while ( *inp >= '0' && *inp <= '9' ) x = 10*x+( *inp++-'0' );
04515         if ( x < 1 || x > BITSINWORD ) {
04516             MesPrint("&Flag number %d outside the permitted range 1-%d.",BITSINWORD);
04517             error = 1;
04518         }
04519         *w++ = x-1;
04520     }
04521     ww[1] = w-ww;
04522     p = pppp; *p = cc; *inp = '(';
04523     gotexp = 1;
04524     if ( ww[1] <= 2 ) {
04525         MesPrint("&The userflag condition in the if statement needs arguments.");
04526         error = 1;
04527     }
04528     inp = p;
04529     gotexp = 1;
04530 }
04531 else goto NoGood;
04532 }
04533 else if ( *p == 'e' || *p == 'E' ) { /* Expression */
04534     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04535     while ( FG.cTable[ *p ] == 0 );
04536     c = *p; *p = 0;
04537     if ( !StrICmp(inp, (UBYTE *) "expression" ) ) {
04538         *p = c;
04539         if ( c != '(' ) {
04540             MesPrint("&no ( after expression");
04541             error = 1;
04542             goto endofif;
04543         }
04544         p++; ww = w; *w++ = IFEXPRESSION; w++;
04545         while ( *p != ')' ) {
04546             if ( *p == ',' ) { p++; continue; }
04547             if ( *p == '[' || FG.cTable[*p] == 0 ) {
04548                 pp = p;
04549                 if ( ( p = SkipAName(p) ) == 0 ) {
04550                     MesPrint("&Improper name for an expression: '%s'",pp);
04551                     error = 1;
04552                     goto endofif;
04553                 }
04554                 c = *p; *p = 0;
04555                 if ( GetName(AC.exprnames,pp,&number,NOAUTO) == CEXPRESSION ) {
04556                     *w++ = number;
04557                 }
04558                 else if ( GetName(AC.varnames,pp,&number,NOAUTO) != NAMENOTFOUND ) {
04559                     MesPrint("&%s is not an expression",pp);
04560                     error = 1;
04561                     *w++ = number;
04562                 }
04563                 *p = c;
04564             }
04565             else {
04566                 MesPrint("&Illegal object in Expression in if-statement");
04567                 error = 1;
04568                 while ( *p && *p != ',' && *p != ')' ) p++;
04569                 if ( *p == 0 || *p == ')' ) break;
04570             }
04571         }
04572         ww[1] = w - ww;
04573         p++;
04574         gotexp = 1;
04575     }
04576     else goto NoGood;
04577     inp = p;
04578 }
04579 else if ( *p == 'i' || *p == 'I' ) { /* IsFactorized */
04580     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04581     while ( FG.cTable[ *p ] == 0 );
04582     c = *p; *p = 0;
04583     if ( !StrICmp(inp, (UBYTE *) "isfactorized" ) ) {
04584         *p = c;
04585         if ( c != '(' ) { /* No expression means current expression */
04586             ww = w; *w++ = IFISFACTORIZED; w++;
04587         }
04588     }
04589     else {
04590         p++; ww = w; *w++ = IFISFACTORIZED; w++;
04591         while ( *p != ')' ) {
04592             if ( *p == ',' ) { p++; continue; }
04593             if ( *p == '[' || FG.cTable[*p] == 0 ) {
04594                 pp = p;
04595                 if ( ( p = SkipAName(p) ) == 0 ) {
04596                     MesPrint("&Improper name for an expression: '%s'",pp);
04597                     error = 1;
04598                     goto endofif;
04599                 }
04600             }
04601             else {
04602                 MesPrint("&Illegal object in Expression in if-statement");
04603                 error = 1;
04604                 while ( *p && *p != ',' && *p != ')' ) p++;
04605                 if ( *p == 0 || *p == ')' ) break;
04606             }
04607         }
04608         ww[1] = w - ww;
04609         p++;
04610         gotexp = 1;
04611     }
04612     else goto NoGood;
04613     inp = p;
04614 }
04615 }
04616 }
04617 }
04618 }
04619 }
04620 }
04621 }
04622 }
04623 }
04624 }
04625 }
04626 }
04627 }
04628 }
04629 }
04630 }
04631 }
04632 }
04633 }
04634 }
04635 }
04636 }
04637 }
04638 }
04639 }
04640 }
04641 }
04642 }
04643 }
04644 }
04645 }
04646 }
04647 }
04648 }
04649 }
04650 }
04651 }
04652 }
04653 }
04654 }
04655 }
04656 }
04657 }
04658 }
04659 }
04660 }
04661 }
04662 }
04663 }
04664 }
04665 }
04666 }
04667 }
04668 }
04669 }
04670 }
04671 }
04672 }
04673 }
04674 }
04675 }
04676 }
04677 }
04678 }
04679 }
04680 }
04681 }
04682 }
04683 }
04684 }
04685 }
04686 }
04687 }
04688 }
04689 }
04690 }
04691 }
04692 }
04693 }
04694 }
04695 }
04696 }
04697 }
04698 }
04699 }
04700 }
04701 }
04702 }
04703 }
04704 }
04705 }
04706 }
04707 }
04708 }
04709 }
04710 }
04711 }
04712 }
04713 }
04714 }
04715 }
04716 }
04717 }
04718 }
04719 }
04720 }
04721 }
04722 }
04723 }
04724 }
04725 }
04726 }
04727 }
04728 }
04729 }
04730 }
04731 }
04732 }
04733 }
04734 }
04735 }
04736 }
04737 }
04738 }
04739 }
04740 }
04741 }
04742 }
04743 }
04744 }
04745 }
04746 }
04747 }
04748 }
04749 }
04750 }
04751 }
04752 }
04753 }
04754 }
04755 }
04756 }
04757 }
04758 }
04759 }
04760 }
04761 }
04762 }
04763 }
04764 }
04765 }
04766 }
04767 }
04768 }
04769 }
04770 }
04771 }
04772 }
04773 }
04774 }
04775 }
04776 }
04777 }
04778 }
04779 }
04780 }
04781 }
04782 }
04783 }
04784 }
04785 }
04786 }
04787 }
04788 }
04789 }
04790 }
04791 }
04792 }
04793 }
04794 }
04795 }
04796 }
04797 }
04798 }
04799 }
04800 }
04801 }
04802 }
04803 }
04804 }
04805 }
04806 }
04807 }
04808 }
04809 }
04810 }
04811 }
04812 }
04813 }
04814 }
04815 }
04816 }
04817 }
04818 }
04819 }
04820 }
04821 }
04822 }
04823 }
04824 }
04825 }
04826 }
04827 }
04828 }
04829 }
04830 }
04831 }
04832 }
04833 }
04834 }
04835 }
04836 }
04837 }
04838 }
04839 }
04840 }
04841 }
04842 }
04843 }
04844 }
04845 }
04846 }
04847 }
04848 }
04849 }
04850 }
04851 }
04852 }
04853 }
04854 }
04855 }
04856 }
04857 }
04858 }
04859 }
04860 }
04861 }
04862 }
04863 }
04864 }
04865 }
04866 }
04867 }
04868 }
04869 }
04870 }
04871 }
04872 }
04873 }
04874 }
04875 }
04876 }
04877 }
04878 }
04879 }
04880 }
04881 }
04882 }
04883 }
04884 }
04885 }
04886 }
04887 }
04888 }
04889 }
04890 }
04891 }
04892 }
04893 }
04894 }
04895 }
04896 }
04897 }
04898 }
04899 }
04900 }
04901 }
04902 }
04903 }
04904 }
04905 }
04906 }
04907 }
04908 }
04909 }
04910 }
04911 }
04912 }
04913 }
04914 }
04915 }
04916 }
04917 }
04918 }
04919 }
04920 }
04921 }
04922 }
04923 }
04924 }
04925 }
04926 }
04927 }
04928 }
04929 }
04930 }
04931 }
04932 }
04933 }
04934 }
04935 }
04936 }
04937 }
04938 }
04939 }
04940 }
04941 }
04942 }
04943 }
04944 }
04945 }
04946 }
04947 }
04948 }
04949 }
04950 }
04951 }
04952 }
04953 }
04954 }
04955 }
04956 }
04957 }
04958 }
04959 }
04960 }
04961 }
04962 }
04963 }
04964 }
04965 }
04966 }
04967 }
04968 }
04969 }
04970 }
04971 }
04972 }
04973 }
04974 }
04975 }
04976 }
04977 }
04978 }
04979 }
04980 }
04981 }
04982 }
04983 }
04984 }
04985 }
04986 }
04987 }
04988 }
04989 }
04990 }
04991 }
04992 }
04993 }
04994 }
04995 }
04996 }
04997 }
04998 }
04999 }

```

```

04600         if ( GetName(AC.exprnames,pp,&number,NOAUTO) == CEXPRESSION ) {
04601             *w++ = number;
04602         }
04603         else if ( GetName(AC.varnames,pp,&number,NOAUTO) != NAMENOTFOUND ) {
04604             MesPrint("&%%s is not an expression",pp);
04605             error = 1;
04606             *w++ = number;
04607         }
04608         *p = c;
04609     }
04610     else {
04611         MesPrint("&Illegal object in IsFactorized in if-statement");
04612         error = 1;
04613         while ( *p && *p != ',' && *p != ')' ) p++;
04614         if ( *p == 0 || *p == ')' ) break;
04615     }
04616 }
04617 p++;
04618 }
04619 ww[1] = w - ww;
04620 gotexp = 1;
04621 }
04622 else goto NoGood;
04623 inp = p;
04624 }
04625 else if ( *p == 'o' || *p == 'O' ) { /* Occurs */
04626 /*
04627     Tests whether variables occur inside a term.
04628     At the moment this is done one by one.
04629     If we want to do them in groups we should do the reading
04630     a bit different: each as a variable in a term, and then
04631     use Normalize to get the variables grouped and in order.
04632     That way FindVar (in if.c) can work more efficiently.
04633     Still to be done!!!
04634     TASK: Nice little task for someone to learn.
04635 */
04636     UBYTE cc;
04637     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04638     while ( FG.cTable[++p] == 0 );
04639     c = cc = *p; *p = 0;
04640     if ( !StrICmp(inp,(UBYTE *)"occurs") ) {
04641         WORD c1, c2, type;
04642         *p = cc;
04643         if ( cc != '(' ) {
04644             MesPrint("&no ( after occurs");
04645             error = 1;
04646             goto endofif;
04647         }
04648         inp = p;
04649         SKIPBRA4(p);
04650         cc = ++p; *p = 0; *inp = ','; pp = p;
04651         ww = w;
04652         *w++ = IFOCCURS; *w++ = 0;
04653         while ( *inp ) {
04654             while ( *inp == ',' ) inp++;
04655             if ( *inp == 0 || *inp == ')' ) break;
04656 /*
04657             Now read a list of names
04658             We can have symbols, vectors, dotproducts, indices, functions.
04659             There could also be dummy indices and/or extra symbols.
04660 */
04661             if ( *inp == '[' || FG.cTable[*inp] == 0 ) {
04662                 if ( ( p = SkipAName(inp) ) == 0 ) return(0);
04663                 c = *p; *p = 0;
04664                 type = GetName(AC.varnames,inp,&c1,WITHAUTO);
04665                 if ( c == '.' ) {
04666                     if ( type == CVECTOR || type == CDUBIOUS ) {
04667                         *p++ = c;
04668                         inp = p;
04669                         p = SkipAName(p);
04670                         if ( p == 0 ) return(0);
04671                         c = *p;
04672                         *p = 0;
04673                         type = GetName(AC.varnames,inp,&c2,WITHAUTO);
04674                         if ( type != CVECTOR && type != CDUBIOUS ) {
04675                             MesPrint("&Not a vector in dotproduct in if statement: %s",inp);
04676                             error = 1;
04677                         }
04678                         else type = CDOTPRODUCT;
04679                     }
04680                     else {
04681                         MesPrint("&Illegal use of . after %s in if statement",inp);
04682                         if ( type == NAMENOTFOUND )
04683                             MesPrint("&%%s is not a properly declared variable",inp);
04684                         error = 1;
04685                         *p++ = c;
04686                         while ( *p && *p != ')' && *p != ',' ) p++;

```



```

04687             if ( *p == ',' && FG.cTable[p[1]] == 1 ) {
04688                 p++;
04689                 while ( *p && *p != ')' && *p != ',' ) p++;
04690             }
04691             continue;
04692         }
04693     }
04694     *p = c;
04695     switch ( type ) {
04696     case CSYMBOL: /* To worry about extra symbols */
04697         *w++ = SYMBOL;
04698         *w++ = c1;
04699         break;
04700     case CINDEXT:
04701         *w++ = INDEX;
04702         *w++ = c1 + AM.OffsetIndex;
04703         break;
04704     case CVECTOR:
04705         *w++ = VECTOR;
04706         *w++ = c1 + AM.OffsetVector;
04707         break;
04708     case CDOTPRODUCT:
04709         *w++ = DOTPRODUCT;
04710         *w++ = c1 + AM.OffsetVector;
04711         *w++ = c2 + AM.OffsetVector;
04712         break;
04713     case CFUNCTION:
04714         *w++ = FUNCTION;
04715         *w++ = c1 + FUNCTION;
04716         break;
04717     default:
04718         MesPrint("&Illegal variable %s in occurs condition in if
statement",inp);
04719         error = 1;
04720         break;
04721     }
04722     inp = p;
04723 }
04724 else {
04725     MesPrint("&Illegal object %s in occurs condition in if statement",inp);
04726     error = 1;
04727     break;
04728 }
04729 }
04730 ww[1] = w-ww;
04731 p = pp; *p = cc; *inp = '(';
04732 gotexp = 1;
04733 if ( ww[1] <= 2 ) {
04734     MesPrint("&The occurs condition in the if statement needs arguments.");
04735     error = 1;
04736 }
04737 }
04738 else goto NoGood;
04739 inp = p;
04740 }
04741 else if ( *p == '$' ) {
04742     if ( gotexp == 1 ) { MesCerr("position for ",p); error = 1; }
04743     p++; inp = p;
04744     while ( FG.cTable[*p] == 0 || FG.cTable[*p] == 1 ) p++;
04745     c = *p; *p = 0;
04746     if ( ( i = GetDollar(inp) ) < 0 ) {
04747         MesPrint("&undefined dollar expression %s",inp);
04748         error = 1;
04749         i = AddDollar(inp,DOLUNDEFINED,0,0);
04750     }
04751     *p = c;
04752     *w++ = IFDOLLAR; *w++ = 3; *w++ = i;
04753 /*
04754     And then the IFDOLLAREXTRA pieces for [1] [$y] etc
04755 */
04756     if ( *p == '[' ) {
04757         p++;
04758         if ( ( w = GetIfDollarFactor(&p,w) ) == 0 ) {
04759             error = 1;
04760             goto endofif;
04761         }
04762         else if ( *p != ']' ) {
04763             error = 1;
04764             goto endofif;
04765         }
04766         p++;
04767     }
04768     inp = p;
04769     gotexp = 1;
04770 }
04771 #ifdef WITHFLOAT
04772     else if ( *p == '.' ) {

```

```

04773         pp = CheckFloat(p,&spec);
04774         if ( pp > p ) goto HaveFloat;
04775     }
04776 #endif
04777     else if ( *p == '(' ) {
04778         if ( gotexp ) {
04779             MesCerr("parenthesis",p);
04780             error = 1;
04781             goto endofif;
04782         }
04783         gotexp = 0;
04784         if ( ++lenlev >= AC.MaxIf ) DoubleIfBuffers();
04785         AC.IfCount[lenpp++] = w-OldWork;
04786         *w++ = SUBEXPR;
04787         w += 2;
04788         p++;
04789     }
04790     else if ( *p == ')' ) {
04791         if ( gotexp == 0 ) { MesCerr("position for )",p); error = 1; }
04792         gotexp = 1;
04793         u = AC.IfCount[--lenpp]+OldWork;
04794         lenlev--;
04795         u[1] = w - u;
04796         if ( lenlev <= 0 ) { /* End if condition */
04797             AT.WorkSpace = OldSpace;
04798             AT.WorkPointer = OldWork;
04799             AddNtol(OldWork[1],OldWork);
04800             p++;
04801             if ( *p == ')' ) {
04802                 MesPrint("&unmatched parenthesis in if/while ()");
04803                 error = 1;
04804                 while ( *++p == ')' );
04805             }
04806             if ( *p ) {
04807                 level = CompileStatement(p);
04808                 if ( level ) error = level;
04809                 while ( *p ) p++;
04810                 if ( CoEndIf(p) && error == 0 ) error = 1;
04811             }
04812             return(error);
04813         }
04814         p++;
04815     }
04816     else if ( *p == '>' ) {
04817         if ( gotexp == 0 ) goto NoExp;
04818         if ( p[1] == '=' ) { *w++ = GREATEREQUAL; *w++ = 2; p += 2; }
04819         else { *w++ = GREATER; *w++ = 2; p++; }
04820         gotexp = 0;
04821     }
04822     else if ( *p == '<' ) {
04823         if ( gotexp == 0 ) goto NoExp;
04824         if ( p[1] == '=' ) { *w++ = LESSEQUAL; *w++ = 2; p += 2; }
04825         else { *w++ = LESS; *w++ = 2; p++; }
04826         gotexp = 0;
04827     }
04828     else if ( *p == '=' ) {
04829         if ( gotexp == 0 ) goto NoExp;
04830         if ( p[1] == '=' ) p++;
04831         *w++ = EQUAL; *w++ = 2; p++;
04832         gotexp = 0;
04833     }
04834     else if ( *p == '!' && p[1] == '=' ) {
04835         if ( gotexp == 0 ) { p++; goto NoExp; }
04836         *w++ = NOTEQUAL; *w++ = 2; p += 2;
04837         gotexp = 0;
04838     }
04839     else if ( *p == '|' && p[1] == '|' ) {
04840         if ( gotexp == 0 ) { p++; goto NoExp; }
04841         *w++ = ORCOND; *w++ = 2; p += 2;
04842         gotexp = 0;
04843     }
04844     else if ( *p == '&' && p[1] == '&' ) {
04845         if ( gotexp == 0 ) {
04846             p++;
04847             p++;
04848             MesCerr("sequence",p);
04849             error = 1;
04850         }
04851         else {
04852             *w++ = ANDCOND; *w++ = 2; p += 2;
04853             gotexp = 0;
04854         }
04855     }
04856     else if ( *p == 0 ) {
04857         MesPrint("&Unmatched parentheses");
04858         error = 1;
04859         goto endofif;

```

```

04860     }
04861     else {
04862         if ( FG.cTable[*p] == 0 ) {
04863             WORD ij;
04864             inp = p;
04865             while ( ( ij = FG.cTable[**p] ) == 0 || ij == 1 );
04866             c = *p; *p = 0;
04867             goto NoGood;
04868         }
04869         MesCerr("sequence",p);
04870         error = 1;
04871         p++;
04872     }
04873 }
04874 endifif;;
04875 return(error);
04876 }
04877
04878 /*
04879 #] CoIf :
04880 #[ CoElse :
04881 */
04882
04883 int CoElse(UBYTE *p)
04884 {
04885     int error = 0;
04886     CBUF *C = cbuf+AC.cbunum;
04887     if ( *p != 0 ) {
04888         while ( *p == ',' ) p++;
04889         if ( tolower(*p) == 'i' && tolower(p[1]) == 'f' && p[2] == '(' )
04890             return(CoElseIf(p+2));
04891         MesPrint("&No extra text allowed as part of an else statement");
04892         error = 1;
04893     }
04894     if ( AC.IfLevel <= 0 ) { MesPrint("&else statement without if"); return(1); }
04895     if ( AC.IfSumCheck[AC.IfLevel-1] != NestingChecksum() - 1 ) {
04896         MesNesting();
04897         error = 1;
04898     }
04899     Add3Com(TYPEELSE,AC.IfLevel)
04900     C->Buffer[AC.IfStack[-1]] = C->numlhs;
04901     AC.IfStack[-1] = C->Pointer - C->Buffer - 1;
04902     return(error);
04903 }
04904
04905 /*
04906 #] CoElse :
04907 #[ CoElseIf :
04908 */
04909
04910 int CoElseIf(UBYTE *inp)
04911 {
04912     CBUF *C = cbuf+AC.cbunum;
04913     if ( AC.IfLevel <= 0 ) { MesPrint("&elseif statement without if"); return(1); }
04914     Add3Com(TYPEELSE,-AC.IfLevel)
04915     AC.IfLevel--;
04916     C->Buffer[*--AC.IfStack] = C->numlhs;
04917     return(CoIf(inp));
04918 }
04919
04920 /*
04921 #] CoElseIf :
04922 #[ CoEndIf :
04923
04924     It puts a RHS-level at the position indicated in the AC.IfStack.
04925     This corresponds to the label belonging to a forward goto.
04926     It is the goto that belongs either to the failing condition
04927     of the if (no else statement), or the completion of the
04928     success path (with else statement)
04929     The code is a jump to the next statement. It is there to prevent
04930     problems with
04931     if ( .. )
04932         if ( .. )
04933         endif;
04934     elseif ( .. )
04935 */
04936
04937 int CoEndIf(UBYTE *inp)
04938 {
04939     CBUF *C = cbuf+AC.cbunum;
04940     WORD i = C->numlhs, to, k = -AC.IfLevel;
04941     int error = 0;
04942     while ( *inp == ',' ) inp++;
04943     if ( *inp != 0 ) {
04944         error = 1;
04945         MesPrint("&No extra text allowed as part of an endif/elseif statement");
04946     }

```

```

04947     if ( AC.IfLevel <= 0 ) {
04948         MesPrint("&Endif statement without corresponding if"); return(1);
04949     }
04950     AC.IfLevel--;
04951     C->Buffer[*--AC.IfStack] = i+1;
04952     if ( AC.IfSumCheck[AC.IfLevel] != NestingChecksum() ) {
04953         MesNesting();
04954         error = 1;
04955     }
04956     Add3Com(TYPEENDIF,i+1)
04957 /*
04958     Now the search for the TYPEELSE in front of the elseif statements
04959 */
04960     to = C->numlhs;
04961     while ( i > 0 ) {
04962         if ( C->lhs[i][0] == TYPEELSE && C->lhs[i][2] == to ) to = i;
04963         if ( C->lhs[i][0] == TYPEIF ) {
04964             if ( C->lhs[i][2] == to ) {
04965                 i--;
04966                 if ( i <= 0 || C->lhs[i][0] != TYPEELSE
04967                     || C->lhs[i][2] != k ) break;
04968                 C->lhs[i][2] = C->numlhs;
04969                 to = i;
04970             }
04971         }
04972         i--;
04973     }
04974     return(error);
04975 }
04976
04977 /*
04978 #] CoEndIf :
04979 #[ CoWhile :
04980 */
04981 int CoWhile(UBYTE *inp)
04982 {
04983     CBUF *C = cbuf+AC.cbunum;
04984     WORD startnum = C->numlhs + 1;
04985     int error;
04986     AC.WhileLevel++;
04987     error = CoIf(inp);
04988     if ( C->numlhs > startnum && C->lhs[startnum][2] == C->numlhs
04989         && C->lhs[C->numlhs][0] == TYPEENDIF ) {
04990         C->lhs[C->numlhs][2] = startnum-1;
04991         AC.WhileLevel--;
04992     }
04993     else C->lhs[startnum][2] = startnum;
04994     return(error);
04995 }
04996
04997 /*
04998 #] CoWhile :
04999 #[ CoEndWhile :
05000 */
05001 int CoEndWhile(UBYTE *inp)
05002 {
05003     int error = 0;
05004     WORD i;
05005     CBUF *C = cbuf+AC.cbunum;
05006     if ( AC.WhileLevel <= 0 ) {
05007         MesPrint("&EndWhile statement without corresponding While"); return(1);
05008     }
05009     AC.WhileLevel--;
05010     i = C->Buffer[AC.IfStack[-1]];
05011     error = CoEndIf(inp);
05012     C->lhs[C->numlhs][2] = i - 1;
05013     return(error);
05014 }
05015
05016 /*
05017 #] CoEndWhile :
05018 #[ DoFindLoop :
05019
05020     Function,arguments=number,loopsize=number,outfun=function,include=index;
05021 */
05022 static char *messfind[] = {
05023     "Findloop(function,arguments=#,loopsize(=#|<#)[,include=index])"
05024     , "Replaceloop,function,arguments=#,loopsize(=#|<#),outfun=function[,include=index]"
05025 };
05026 static WORD comfindloop[7] = { TYPEFINDLOOP,7,0,0,0,0,0 };
05027
05028 int DoFindLoop(UBYTE *inp, int mode)
05029 {
05030     UBYTE *s, c;

```

```

05034     WORD funnum, nargs = 0, nloop = 0, indexnum = 0, outfun = 0;
05035     int type, aflag, lflag, indflag, outflag, error = 0, sym;
05036     while ( *inp == ',' ) inp++;
05037     if ( ( s = SkipAName(inp) ) == 0 ) {
05038 syntax:
05039         MesPrint("&Proper syntax is:");
05040         MesPrint("%s",messfind[mode]);
05041         return(1);
05042     }
05043     c = *s; *s = 0;
05044     if ( ( ( type = GetName(AC.varnames,inp,&funnum,WITHAUTO) ) == NAMENOTFOUND )
05045         || type != CFUNCTION || ( ( sym = (functions[funnum].symmetric) & ~REVERSEORDER )
05046         != SYMMETRIC && sym != ANTISYMMETRIC ) ) {
05047         MesPrint("&%s should be a (anti)symmetric function or tensor",inp);
05048         error = 1;
05049     }
05050     funnum += FUNCTION;
05051     *s = c; inp = s;
05052     aflag = lflag = indflag = outflag = 0;
05053     while ( *inp == ',' ) {
05054         while ( *inp == ',' ) inp++;
05055         s = inp;
05056         if ( ( s = SkipAName(inp) ) == 0 ) goto syntax;
05057         c = *s; *s = 0;
05058         if ( StrICont(inp,(UBYTE *)"arguments") == 0 ) {
05059             if ( c != '=' ) goto syntax;
05060             *s++ = c;
05061             NeedNumber(nargs,s,syntax)
05062             aflag++;
05063             inp = s;
05064         }
05065         else if ( StrICont(inp,(UBYTE *)"loopsize") == 0 ) {
05066             if ( c != '=' && c != '<' ) goto syntax;
05067             *s++ = c;
05068             if ( FG.cTable[*s] == 1 ) {
05069                 NeedNumber(nloop,s,syntax)
05070                 if ( nloop < 2 ) {
05071                     MesPrint("&loopsize should be at least 2");
05072                     error = 1;
05073                 }
05074                 if ( c == '<' ) nloop = -nloop;
05075             }
05076             else if ( tolower(*s) == 'a' && tolower(s[1]) == 'l'
05077                 && tolower(s[2]) == 'l' && FG.cTable[s[3]] > 1 ) {
05078                 nloop = -1; s += 3;
05079                 if ( c != '=' ) goto syntax;
05080             }
05081             inp = s;
05082             lflag++;
05083         }
05084         else if ( StrICont(inp,(UBYTE *)"include") == 0 ) {
05085             if ( c != '=' ) goto syntax;
05086             *s++ = c;
05087             if ( ( inp = SkipAName(s) ) == 0 ) goto syntax;
05088             c = *inp; *inp = 0;
05089             if ( ( type = GetName(AC.varnames,s,&indexnum,WITHAUTO) ) != CINDEX ) {
05090                 MesPrint("&%s is not a proper index",s);
05091                 error = 1;
05092             }
05093             else if ( indexnum < WILDOFFSET
05094                 && indices[indexnum].dimension == 0 ) {
05095                 MesPrint("&%s should be a summable index",s);
05096                 error = 1;
05097             }
05098             indexnum += AM.OffsetIndex;
05099             *inp = c;
05100             indflag++;
05101         }
05102         else if ( StrICont(inp,(UBYTE *)"outfun") == 0 ) {
05103             if ( c != '=' ) goto syntax;
05104             *s++ = c;
05105             if ( ( inp = SkipAName(s) ) == 0 ) goto syntax;
05106             c = *inp; *inp = 0;
05107             if ( ( type = GetName(AC.varnames,s,&outfun,WITHAUTO) ) != CFUNCTION ) {
05108                 MesPrint("&%s is not a proper function or tensor",s);
05109                 error = 1;
05110             }
05111             outfun += FUNCTION;
05112             outflag++;
05113             *inp = c;
05114         }
05115         else {
05116             MesPrint("&Unrecognized option in FindLoop or ReplaceLoop: %s",inp);
05117             error = 1;
05118             *s = c; inp = s;
05119             while ( *inp && *inp != ',' ) inp++;
05120         }

```

```

05121     }
05122     if ( *inp != 0 && mode == REPLACELOOP ) goto syntax;
05123     if ( mode == FINDLOOP && outflag > 0 ) {
05124         MesPrint("&outflag option is illegal in FindLoop");
05125         error = 1;
05126     }
05127     if ( mode == REPLACELOOP && outflag == 0 ) goto syntax;
05128     if ( aflag == 0 || lflag == 0 ) goto syntax;
05129     comfindloop[3] = funnum;
05130     comfindloop[4] = nloop;
05131     comfindloop[5] = nargs;
05132     comfindloop[6] = outfun;
05133     comfindloop[1] = 7;
05134     if ( indflag ) {
05135         if ( mode == 0 ) comfindloop[2] = indexnum + 5;
05136         else comfindloop[2] = -indexnum - 5;
05137     }
05138     else comfindloop[2] = mode;
05139     AddNtoL(comfindloop[1],comfindloop);
05140     return(error);
05141 }
05142
05143 /*
05144 #] DoFindLoop :
05145 #[ CoFindLoop :
05146 */
05147
05148 int CoFindLoop(UBYTE *inp)
05149 { return(DoFindLoop(inp,FINDLOOP)); }
05150
05151 /*
05152 #] CoFindLoop :
05153 #[ CoReplaceLoop :
05154 */
05155
05156 int CoReplaceLoop(UBYTE *inp)
05157 {
05158     int error = DoFindLoop(inp,REPLACELOOP);
05159     if ( error ) {
05160         Terminate(-1);
05161     }
05162     return(error);
05163 }
05164
05165 /*
05166 #] CoReplaceLoop :
05167 #[ CoFunPowers :
05168 */
05169
05170 static UBYTE *FunPowOptions[] = {
05171     (UBYTE *) "nofunpowers"
05172     , (UBYTE *) "commutingonly"
05173     , (UBYTE *) "allfunpowers"
05174 };
05175
05176 int CoFunPowers(UBYTE *inp)
05177 {
05178     UBYTE *option, c;
05179     int i, maxoptions = sizeof(FunPowOptions)/sizeof(UBYTE *);
05180     while ( *inp == ',' ) inp++;
05181     option = inp;
05182     inp = SkipAName(inp); c = *inp; *inp = 0;
05183     for ( i = 0; i < maxoptions; i++ ) {
05184         if ( StrICont(option,FunPowOptions[i]) == 0 ) {
05185             if ( c ) {
05186                 *inp = c;
05187                 MesPrint("&Illegal FunPowers statement");
05188                 return(1);
05189             }
05190             AC.funpowers = i;
05191             return(0);
05192         }
05193     }
05194     MesPrint("&Illegal option in FunPowers statement: %s",option);
05195     return(1);
05196 }
05197
05198 /*
05199 #] CoFunPowers :
05200 #[ CoUnitTrace :
05201 */
05202
05203 int CoUnitTrace(UBYTE *s)
05204 {
05205     WORD num;
05206     if ( FG.cTable[*s] == 1 ) {
05207         ParseNumber(num,s)

```

```

05208         if ( *s != 0 ) {
05209 nogood:      MesPrint("&Value of UnitTrace should be a (positive) number or a symbol");
05210               return(1);
05211         }
05212         AC.lUnitTrace[0] = SNUMBER;
05213         AC.lUnitTrace[2] = num;
05214     }
05215     else {
05216         if ( GetName(AC.varnames,s,&num,WITHAUTO) == CSYMBOL ) {
05217             AC.lUnitTrace[0] = SYMBOL;
05218             AC.lUnitTrace[2] = num;
05219             num = -num;
05220         }
05221         else goto nogood;
05222         s = SkipAName(s);
05223         if ( *s ) goto nogood;
05224     }
05225     AC.lUnitTrace = num;
05226     return(0);
05227 }
05228
05229 /*
05230 #] CoUnitTrace :
05231 #[ CoTerm :
05232
05233 Note: termstack holds the offset of the term statement in the compiler
05234 buffer. termstack holds the offset of the last sort statement
05235      (or the corresponding term statement)
05236 */
05237
05238 int CoTerm(UBYTE *s)
05239 {
05240     GETIDENTITY
05241     WORD *w = AT.WorkPointer;
05242     int error = 0;
05243     while ( *s == ',' ) s++;
05244     if ( *s ) {
05245         MesPrint("&Illegal syntax for Term statement");
05246         return(1);
05247     }
05248     if ( AC.termlevel+1 >= AC.maxtermlevel ) {
05249         if ( AC.maxtermlevel <= 0 ) {
05250             AC.maxtermlevel = 20;
05251             AC.termstack = (LONG *)Malloc1(AC.maxtermlevel*sizeof(LONG),"termstack");
05252             AC.termstack = (LONG *)Malloc1(AC.maxtermlevel*sizeof(LONG),"termstack");
05253             AC.termsumcheck = (WORD *)Malloc1(AC.maxtermlevel*sizeof(WORD),"termsumcheck");
05254         }
05255         else {
05256             DoubleBuffer((void **)AC.termstack,(void **)AC.termstack+AC.maxtermlevel,
05257                 sizeof(LONG),"doubling termstack");
05258             DoubleBuffer((void **)AC.termstack,(void **)AC.termstack+AC.maxtermlevel,
05259                 sizeof(LONG),"doubling termstack");
05260             DoubleBuffer((void **)AC.termstack,(void **)AC.termstack+AC.maxtermlevel,
05261                 sizeof(LONG),"doubling termstack");
05262             DoubleBuffer((void **)AC.termstack,(void **)AC.termstack+AC.maxtermlevel,
05263                 sizeof(LONG),"doubling termstack");
05264             AC.maxtermlevel *= 2;
05265         }
05266     }
05267     AC.termsumcheck[AC.termlevel] = NestingChecksum();
05268     AC.termstack[AC.termlevel] = cbuf[AC.cbunum].Pointer
05269         - cbuf[AC.cbunum].Buffer + 2;
05270     AC.termstack[AC.termlevel] = AC.termstack[AC.termlevel] + 1;
05271     AC.termlevel++;
05272     *w++ = TYPETERM;
05273     w++;
05274     *w++ = cbuf[AC.cbunum].numlhs;
05275     *w++ = cbuf[AC.cbunum].numlhs;
05276     AT.WorkPointer[1] = w - AT.WorkPointer;
05277     AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
05278     return(error);
05279 }
05280
05281 /*
05282 #] CoTerm :
05283 #[ CoEndTerm :
05284 */
05285
05286 int CoEndTerm(UBYTE *s)
05287 {
05288     CBUF *C = cbuf+AC.cbunum;
05289     while ( *s == ',' ) s++;
05290     if ( *s ) {
05291         MesPrint("&Illegal syntax for EndTerm statement");
05292         return(1);
05293     }
05294     if ( AC.termlevel <= 0 ) {

```

```

05295         MesPrint("&EndTerm without corresponding Argument statement");
05296         return(1);
05297     }
05298     AC.termlevel--;
05299     cbuf[AC.cbunum].Buffer[AC.termstack[AC.termlevel]] = C->numlhs;
05300     cbuf[AC.cbunum].Buffer[AC.termstack[AC.termlevel]] = C->numlhs;
05301     if ( AC.termsumcheck[AC.termlevel] != NestingChecksum() ) {
05302         MesNesting();
05303         return(1);
05304     }
05305     return(0);
05306 }
05307
05308 /*
05309 #] CoEndTerm :
05310 #[ CoSort :
05311 */
05312
05313 int CoSort(UBYTE *s)
05314 {
05315     GETIDENTITY
05316     WORD *w = AT.WorkPointer;
05317     int error = 0;
05318     while ( *s == ',' ) s++;
05319     if ( *s ) {
05320         MesPrint("&Illegal syntax for Sort statement");
05321         error = 1;
05322     }
05323     if ( AC.termlevel <= 0 ) {
05324         MesPrint("&The Sort statement can only be used inside a term environment");
05325         error = 1;
05326     }
05327     if ( error ) return(error);
05328     *w++ = TYPESORT;
05329     w++;
05330     w++;
05331     cbuf[AC.cbunum].Buffer[AC.termstack[AC.termlevel-1]] =
05332         *w = cbuf[AC.cbunum].numlhs+1;
05333     w++;
05334     AC.termstack[AC.termlevel-1] = cbuf[AC.cbunum].Pointer
05335         - cbuf[AC.cbunum].Buffer + 3;
05336     if ( AC.termsumcheck[AC.termlevel-1] != NestingChecksum() - 1 ) {
05337         MesNesting();
05338         return(1);
05339     }
05340     AT.WorkPointer[1] = w - AT.WorkPointer;
05341     AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
05342     return(error);
05343 }
05344
05345 /*
05346 #] CoSort :
05347 #[ CoPolyFun :
05348
05349 Collect,functionname
05350 */
05351
05352 int CoPolyFun(UBYTE *s)
05353 {
05354     GETIDENTITY
05355     WORD numfun;
05356     int type, error = 0;
05357     UBYTE *t;
05358     AR.PolyFun = AC.lPolyFun = 0;
05359     AR.PolyFunInv = AC.lPolyFunInv = 0;
05360     AR.PolyFunType = AC.lPolyFunType = 0;
05361     AR.PolyFunExp = AC.lPolyFunExp = 0;
05362     AR.PolyFunVar = AC.lPolyFunVar = 0;
05363     AR.PolyFunPow = AC.lPolyFunPow = 0;
05364     if ( *s == 0 ) { return(0); }
05365     t = SkipAName(s);
05366     if ( t == 0 || *t != 0 ) {
05367         MesPrint("&PolyFun statement needs a single commuting function for its argument");
05368         return(1);
05369     }
05370     if ( ( ( type = GetName(AC.varnames,s,&numfun,WITHAUTO) ) != CFUNCTION )
05371         || ( functions[numfun].spec != 0 ) || ( functions[numfun].commute != 0 ) ) {
05372         MesPrint("&%s should be a regular commuting function",s);
05373         if ( type < 0 ) {
05374             if ( GetName(AC.exprnames,s,&numfun,NOAUTO) == NAMENOTFOUND )
05375                 AddFunction(s,0,0,0,0,0,-1,-1);
05376         }
05377         error = 1;
05378     }
05379     else {
05380         AR.PolyFun = AC.lPolyFun = numfun+FUNCTION;
05381         AR.PolyFunType = AC.lPolyFunType = 1;

```



```

05382     }
05383 #ifdef WITHFLOAT
05384     if ( mpfaux_ != 0 ) {
05385         MesPrint("&Simultaneous use of PolyFun and float_ is not allowed.");
05386         error = 1;
05387     }
05388 #endif
05389     return(error);
05390 }
05391
05392 /*
05393 #] CoPolyFun :
05394 #[ CoPolyRatFun :
05395
05396     PolyRatFun [,functionname[,functionname] (option)]
05397 */
05398
05399 int CoPolyRatFun(UBYTE *s)
05400 {
05401     GETIDENTITY
05402     WORD numfun;
05403     int type, error = 0;
05404     UBYTE *t, c;
05405     AR.PolyFun = AC.lPolyFun = 0;
05406     AR.PolyFunInv = AC.lPolyFunInv = 0;
05407     AR.PolyFunType = AC.lPolyFunType = 0;
05408     AR.PolyFunExp = AC.lPolyFunExp = 0;
05409     AR.PolyFunVar = AC.lPolyFunVar = 0;
05410     AR.PolyFunPow = AC.lPolyFunPow = 0;
05411     if ( *s == 0 ) return(error);
05412     t = SkipAName(s);
05413     if ( t == 0 ) goto NumErr;
05414     c = *t; *t = 0;
05415 #ifdef WITHFLOAT
05416     if ( mpfaux_ != 0 ) {
05417         MesPrint("&Simultaneous use of PolyFun and float_ is not allowed.");
05418         error = 1;
05419     }
05420 #endif
05421     if ( ( ( type = GetName(AC.varnames,s,&numfun,WITHAUTO) ) != CFUNCTION )
05422     || ( functions[numfun].spec != 0 ) || ( functions[numfun].commute != 0 ) ) {
05423         MesPrint("&%s should be a regular commuting function",s);
05424         if ( type < 0 ) {
05425             if ( GetName(AC.exprnames,s,&numfun,NOAUTO) == NAMENOTFOUND )
05426                 AddFunction(s,0,0,0,0,0,-1,-1);
05427         }
05428         return(1);
05429     }
05430     AR.PolyFun = AC.lPolyFun = numfun+FUNCTION;
05431     AR.PolyFunInv = AC.lPolyFunInv = 0;
05432     AR.PolyFunType = AC.lPolyFunType = 2;
05433     AC.PolyRatFunChanged = 1;
05434     if ( c == 0 ) return(error);
05435     *t = c;
05436     if ( *t == '-' ) { AC.PolyRatFunChanged = 0; t++; }
05437     while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05438     if ( *t == 0 ) return(error);
05439     if ( *t != '(' ) {
05440         s = t;
05441         t = SkipAName(s);
05442         if ( t == 0 ) goto NumErr;
05443         c = *t; *t = 0;
05444         if ( ( ( type = GetName(AC.varnames,s,&numfun,WITHAUTO) ) != CFUNCTION )
05445         || ( functions[numfun].spec != 0 ) || ( functions[numfun].commute != 0 ) ) {
05446             MesPrint("&%s should be a regular commuting function",s);
05447             if ( type < 0 ) {
05448                 if ( GetName(AC.exprnames,s,&numfun,NOAUTO) == NAMENOTFOUND )
05449                     AddFunction(s,0,0,0,0,0,-1,-1);
05450             }
05451             return(1);
05452         }
05453         AR.PolyFunInv = AC.lPolyFunInv = numfun+FUNCTION;
05454         if ( c == 0 ) return(error);
05455         *t = c;
05456         if ( *t == '-' ) { AC.PolyRatFunChanged = 0; t++; }
05457         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05458         if ( *t == 0 ) return(error);
05459     }
05460     if ( *t == '(' ) {
05461         t++;
05462         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05463     }
05464     /*
05465     Next we need a keyword like
05466     (divergence,ep)
05467     (expand,ep,maxpow)
05468     */
05469     s = t;

```

```

05469     t = SkipAName(s);
05470     if ( t == 0 ) goto NumErr;
05471     c = *t; *t = 0;
05472     if ( ( StrICmp(s,(UBYTE *)"divergence") == 0 )
05473 || ( StrICmp(s,(UBYTE *)"finddivergence") == 0 ) ) {
05474         if ( c != ',' ) {
05475             MesPrint("&Illegal option field in PolyRatFun statement.");
05476             return(1);
05477         }
05478         *t = c;
05479         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05480         s = t;
05481         t = SkipAName(s);
05482         if ( t == 0 ) goto NumErr;
05483         c = *t; *t = 0;
05484         if ( ( type = GetName(AC.varnames,s,&AC.lPolyFunVar,WITHAUTO) ) != CSYMBOL ) {
05485             MesPrint("&Illegal symbol %s in option field in PolyRatFun statement.",s);
05486             return(1);
05487         }
05488         *t = c;
05489         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05490         if ( *t != ')' ) {
05491             MesPrint("&Illegal termination of option in PolyRatFun statement.");
05492             return(1);
05493         }
05494         AR.PolyFunExp = AC.lPolyFunExp = 1;
05495         AR.PolyFunVar = AC.lPolyFunVar;
05496         symbols[AC.lPolyFunVar].minpower = -MAXPOWER;
05497         symbols[AC.lPolyFunVar].maxpower = MAXPOWER;
05498     }
05499     else if ( StrICmp(s,(UBYTE *)"expand") == 0 ) {
05500         WORD x = 0, etype = 2;
05501         if ( c != ',' ) {
05502             MesPrint("&Illegal option field in PolyRatFun statement.");
05503             return(1);
05504         }
05505         *t = c;
05506         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05507         s = t;
05508         t = SkipAName(s);
05509         if ( t == 0 ) goto NumErr;
05510         c = *t; *t = 0;
05511         if ( ( type = GetName(AC.varnames,s,&AC.lPolyFunVar,WITHAUTO) ) != CSYMBOL ) {
05512             MesPrint("&Illegal symbol %s in option field in PolyRatFun statement.",s);
05513             return(1);
05514         }
05515         *t = c;
05516         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05517         if ( *t > '9' || *t < '0' ) {
05518             MesPrint("&Illegal option field in PolyRatFun statement.");
05519             return(1);
05520         }
05521         while ( *t <= '9' && *t >= '0' ) x = 10*x + *t++ - '0';
05522         while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05523         if ( *t != ')' ) {
05524             s = t;
05525             t = SkipAName(s);
05526             if ( t == 0 ) goto ParErr;
05527             c = *t; *t = 0;
05528             if ( StrICmp(s,(UBYTE *)"fixed") == 0 ) {
05529                 etype = 3;
05530             }
05531             else if ( StrICmp(s,(UBYTE *)"relative") == 0 ) {
05532                 etype = 2;
05533             }
05534             else {
05535                 MesPrint("&Illegal termination of option in PolyRatFun statement.");
05536                 return(1);
05537             }
05538             *t = c;
05539             while ( *t == ',' || *t == ' ' || *t == '\t' ) t++;
05540             if ( *t != ')' ) {
05541                 MesPrint("&Illegal termination of option in PolyRatFun statement.");
05542                 return(1);
05543             }
05544         }
05545         AR.PolyFunExp = AC.lPolyFunExp = etype;
05546         AR.PolyFunVar = AC.lPolyFunVar;
05547         AR.PolyFunPow = AC.lPolyFunPow = x;
05548         symbols[AC.lPolyFunVar].minpower = -MAXPOWER;
05549         symbols[AC.lPolyFunVar].maxpower = MAXPOWER;
05550     }
05551     else {
05552 ParErr: MesPrint("&Illegal option %s in PolyRatFun statement.",s);
05553         return(1);
05554     }
05555     t++;

```

```

05556         while ( *t == ',' || *t == ' ' || *t == '\\t' ) t++;
05557         if ( *t == 0 ) return(error);
05558     }
05559     NumErr++;
05560     MesPrint("&PolyRatFun statement needs one or two commuting function(s) for its argument(s)");
05561     return(1);
05562 }
05563
05564 /*
05565  #] CoPolyRatFun :
05566  #[ CoMerge :
05567 */
05568
05569 int CoMerge(UBYTE *inp)
05570 {
05571     UBYTE *s = inp;
05572     int type;
05573     WORD numfunc, option = 0;
05574     if ( tolower(s[0]) == 'o' && tolower(s[1]) == 'n' && tolower(s[2]) == 'c' &&
05575         tolower(s[3]) == 'e' && tolower(s[4]) == ',' ) {
05576         option = 1; s += 5;
05577     }
05578     else if ( tolower(s[0]) == 'a' && tolower(s[1]) == 'l' && tolower(s[2]) == 'l' &&
05579         tolower(s[3]) == ',' ) {
05580         option = 0; s += 4;
05581     }
05582     if ( *s == '$' ) {
05583         if ( ( type = GetName(AC.dollarnames,s+1,&numfunc,NOAUTO) ) == CDOLLAR )
05584             numfunc = -numfunc;
05585         else {
05586             MesPrint("%s is undefined",s);
05587             numfunc = AddDollar(s+1,DOLINDEX,&one,1);
05588             return(1);
05589         }
05590     tests: s = SkipAName(s);
05591     if ( *s != 0 ) {
05592         MesPrint("&Merge/shuffle should have a single function or $variable for its argument");
05593         return(1);
05594     }
05595     }
05596     else if ( ( type = GetName(AC.varnames,s,&numfunc,WITHAUTO) ) == CFUNCTION ) {
05597         numfunc += FUNCTION;
05598         goto tests;
05599     }
05600     else if ( type != -1 ) {
05601         if ( type != CDUBIOUS ) {
05602             NameConflict(type,s);
05603             type = MakeDubious(AC.varnames,s,&numfunc);
05604         }
05605         return(1);
05606     }
05607     else {
05608         MesPrint("%s is not a function",s);
05609         numfunc = AddFunction(s,0,0,0,0,0,-1,-1) + FUNCTION;
05610         return(1);
05611     }
05612     Add4Com(TYPEMERGE,numfunc,option);
05613     return(0);
05614 }
05615
05616 /*
05617  #] CoMerge :
05618  #[ CoStuffle :
05619
05620     Important for future options: The bit, given by 256 (bit 8) is reserved
05621     internally for keeping track of the sign in the number of Stuffle
05622     additions.
05623 */
05624
05625 int CoStuffle(UBYTE *inp)
05626 {
05627     UBYTE *s = inp, *ss, c;
05628     int type;
05629     WORD numfunc, option = 0;
05630     if ( tolower(s[0]) == 'o' && tolower(s[1]) == 'n' && tolower(s[2]) == 'c' &&
05631         tolower(s[3]) == 'e' && tolower(s[4]) == ',' ) {
05632         option = 1; s += 5;
05633     }
05634     else if ( tolower(s[0]) == 'a' && tolower(s[1]) == 'l' && tolower(s[2]) == 'l' &&
05635         tolower(s[3]) == ',' ) {
05636         option = 0; s += 4;
05637     }
05638     ss = SkipAName(s);
05639     c = *ss; *ss = 0;
05640     if ( *s == '$' ) {
05641         if ( ( type = GetName(AC.dollarnames,s+1,&numfunc,NOAUTO) ) == CDOLLAR )
05642             numfunc = -numfunc;

```

```

05643         else {
05644             MesPrint("%s is undefined",s);
05645             numfunc = AddDollar(s+1,DOLINDEX,&one,1);
05646             return(1);
05647         }
05648 tests: *ss = c;
05649         if ( *ss != '+' && *ss != '-' && ss[1] != 0 ) {
05650             MesPrint("&Stuffle should have a single function or $variable for its argument, followed
by either + or -");
05651             return(1);
05652         }
05653         if ( *ss == '-' ) option += 2;
05654     }
05655     else if ( ( type = GetName(AC.varnames,s,&numfunc,WITHAUTO) ) == CFUNCTION ) {
05656         numfunc += FUNCTION;
05657         goto tests;
05658     }
05659     else if ( type != -1 ) {
05660         if ( type != CDUBIOUS ) {
05661             NameConflict(type,s);
05662             type = MakeDubious(AC.varnames,s,&numfunc);
05663         }
05664         return(1);
05665     }
05666     else {
05667         MesPrint("%s is not a function",s);
05668         numfunc = AddFunction(s,0,0,0,0,-1,-1) + FUNCTION;
05669         return(1);
05670     }
05671     Add4Com(TYPESTUFFLE,numfunc,option);
05672     return(0);
05673 }
05674
05675 /*
05676 #] CoStuffle :
05677 #[ CoProcessBucket :
05678 */
05679
05680 int CoProcessBucket(UBYTE *s)
05681 {
05682     LONG x;
05683     while ( *s == ',' || *s == '=' ) s++;
05684     ParseNumber(x,s)
05685     if ( *s && *s != ' ' && *s != '\t' ) {
05686         MesPrint("&Numerical value expected for ProcessBucketSize");
05687         return(1);
05688     }
05689     AC.ProcessBucketSize = x;
05690     return(0);
05691 }
05692
05693 /*
05694 #] CoProcessBucket :
05695 #[ CoThreadBucket :
05696 */
05697
05698 int CoThreadBucket(UBYTE *s)
05699 {
05700     LONG x;
05701     while ( *s == ',' || *s == '=' ) s++;
05702     ParseNumber(x,s)
05703     if ( *s && *s != ' ' && *s != '\t' ) {
05704         MesPrint("&Numerical value expected for ThreadBucketSize");
05705         return(1);
05706     }
05707     if ( x <= 0 ) {
05708         Warning("Negative of zero value not allowed for ThreadBucketSize. Adjusted to 1.");
05709         x = 1;
05710     }
05711     AC.ThreadBucketSize = x;
05712 #ifdef WITHPTHREADS
05713     if ( AS.MultiThreaded ) MakeThreadBuckets(-1,1);
05714 #endif
05715     return(0);
05716 }
05717
05718 /*
05719 #] CoThreadBucket :
05720 #[ DoArgPlode :
05721
05722 Syntax: a list of functions.
05723 If the functions have an argument it must be a function.
05724 In the case f(g) we treat f(g(...)) with g any argument.
05725 (not yet implemented)
05726 */
05727
05728 int DoArgPlode(UBYTE *s, int par)

```

```

05729 {
05730     GETIDENTITY
05731     WORD numfunc, type, error = 0, *w, n;
05732     UBYTE *t,c;
05733     int i;
05734     w = AT.WorkPointer;
05735     *w++ = par;
05736     w++;
05737     while ( *s == ',' ) s++;
05738     while ( *s ) {
05739         if ( *s == '$' ) {
05740             MesPrint("&We don't do dollar variables yet in ArgImplode/ArgExplode");
05741             return(1);
05742         }
05743         t = s;
05744         if ( ( s = SkipAName(s) ) == 0 ) return(1);
05745         c = *s; *s = 0;
05746         if ( ( type = GetName(AC.varnames,t,&numfunc,WITHAUTO) ) == CFUNCTION ) {
05747             numfunc += FUNCTION;
05748         }
05749         else if ( type != -1 ) {
05750             if ( type != CDUBIOUS ) {
05751                 NameConflict(type,t);
05752                 type = MakeDubious(AC.varnames,t,&numfunc);
05753             }
05754             error = 1;
05755         }
05756         else {
05757             MesPrint("&%s is not a function",t);
05758             numfunc = AddFunction(s,0,0,0,0,0,-1,-1) + FUNCTION;
05759             return(1);
05760         }
05761         *s = c;
05762         *w++ = numfunc;
05763         *w++ = FUNHEAD;
05764         #if FUNHEAD > 2
05765         for ( i = 2; i < FUNHEAD; i++ ) *w++ = 0;
05766     #endif
05767         if ( *s && *s != ',' ) {
05768             MesPrint("&Illegal character in ArgImplode/ArgExplode statement: %s",s);
05769             return(1);
05770         }
05771         while ( *s == ',' ) s++;
05772     }
05773     n = w - AT.WorkPointer;
05774     AT.WorkPointer[1] = n;
05775     AddNtoL(n,AT.WorkPointer);
05776     return(error);
05777 }
05778
05779 /*
05780 #] DoArgPlode :
05781 #[ CoArgExplode :
05782 */
05783
05784 int CoArgExplode(UBYTE *s) { return(DoArgPlode(s,TYPEARGEXPLODE)); }
05785
05786 /*
05787 #] CoArgExplode :
05788 #[ CoArgImplode :
05789 */
05790
05791 int CoArgImplode(UBYTE *s) { return(DoArgPlode(s,TYPEARGIMPLODE)); }
05792
05793 /*
05794 #] CoArgImplode :
05795 #[ CoClearTable :
05796 */
05797
05798 int CoClearTable(UBYTE *s)
05799 {
05800     UBYTE c, *t;
05801     int j, type, error = 0;
05802     WORD numfun;
05803     TABLES T, TT;
05804     if ( *s == 0 ) {
05805         MesPrint("&The ClearTable statement needs at least one (table) argument.");
05806         return(1);
05807     }
05808     while ( *s ) {
05809         t = s;
05810         s = SkipAName(s);
05811         c = *s; *s = 0;
05812         if ( ( ( type = GetName(AC.varnames,t,&numfun,WITHAUTO) ) != CFUNCTION )
05813             && type != CDUBIOUS ) {
05814             MesPrint("&%s is not a table",t);
05815             error = 4;

```

```

05816         if ( type < 0 ) numfun = AddFunction(t,0,0,0,0,0,-1,-1);
05817         *s = c;
05818         if ( *s == ',' ) s++;
05819         continue;
05820     }
05821 /*
05822     else if ( ( ( T = functions[numfun].tabl ) == 0 )
05823         || ( T->sparse == 0 ) ) goto nofunc;
05824 */
05825     else if ( ( T = functions[numfun].tabl ) == 0 ) goto nofunc;
05826     numfun += FUNCTION;
05827     *s = c;
05828     if ( *s == ',' ) s++;
05829 /*
05830     Now we clear the table.
05831 */
05832     if ( T->sparse ) {
05833         if ( T->boomlijst ) M_free(T->boomlijst,"TableTree");
05834         for ( j = 0; j < T->buffersfill; j++ ) { /* was <= */
05835             finishcbuf(T->buffers[j]);
05836         }
05837         if ( T->buffers ) M_free(T->buffers,"Table buffers");
05838         finishcbuf(T->bufnum);
05839
05840         T->boomlijst = 0;
05841         T->numtree = 0; T->rootnum = 0; T->MaxTreeSize = 0;
05842         T->boomlijst = 0;
05843         T->bufnum = inicbufs();
05844         T->bufferssize = 8;
05845         T->buffers = (WORD *)Malloca(sizeof(WORD)*T->bufferssize,"Table buffers");
05846         T->buffersfill = 0;
05847         T->buffers[T->buffersfill++] = T->bufnum;
05848
05849         T->totind = 0; /* At the moment there are this many */
05850         T->reserved = 0;
05851
05852         ClearTableTree(T);
05853
05854         if ( T->spare ) {
05855             if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
05856             T->tablepointers = 0;
05857             TT = T->spare;
05858             if ( TT->tablepointers ) M_free(TT->tablepointers,"tablepointers");
05859             for ( j = 0; j < TT->buffersfill; j++ ) {
05860                 finishcbuf(TT->buffers[j]);
05861             }
05862             if ( TT->boomlijst ) M_free(TT->boomlijst,"TableTree");
05863             if ( TT->buffers ) M_free(TT->buffers,"Table buffers");
05864             if ( TT->mm ) M_free(TT->mm,"tableminmax");
05865             if ( TT->flags ) M_free(TT->flags,"tableflags");
05866             M_free(TT,"table");
05867             SpareTable(T);
05868         }
05869     }
05870     else EmptyTable(T);
05871 }
05872 return(error);
05873 }
05874
05875 /*
05876 #] CoClearTable :
05877 #[ CoDenominators :
05878 */
05879
05880 int CoDenominators(UBYTE *s)
05881 {
05882     WORD numfun;
05883     int type;
05884     UBYTE *t = SkipAName(s), *t1;
05885     if ( t == 0 ) goto syntaxerror;
05886     t1 = t; while ( *t1 == ',' || *t1 == ' ' || *t1 == '\t' ) t1++;
05887     if ( *t1 ) goto syntaxerror;
05888     *t = 0;
05889     if ( ( ( type = GetName(AC.varnames,s,&numfun,WITHAUTO) ) != CFUNCTION )
05890         || ( functions[numfun].spec != 0 ) ) {
05891         if ( type < 0 ) {
05892             if ( GetName(AC.exprnames,s,&numfun,NOAUTO) == NAMENOTFOUND )
05893                 AddFunction(s,0,0,0,0,0,-1,-1);
05894         }
05895         goto syntaxerror;
05896     }
05897     Add3Com(TYPEDENOMINATORS,numfun+FUNCTION);
05898     return(0);
05899 syntaxerror:
05900     MesPrint("&Denominators statement needs one regular function for its argument");
05901     return(1);
05902 }

```

```

05903
05904 /*
05905     #] CoDenominators :
05906     #[ CoDropCoefficient :
05907 */
05908
05909 int CoDropCoefficient(UBYTE *s)
05910 {
05911     if ( *s == 0 ) {
05912         Add2Com(TYPEDROPCOEFFICIENT)
05913         return(0);
05914     }
05915     MesPrint("&Illegal argument in DropCoefficient statement: '%s'",s);
05916     return(1);
05917 }
05918 /*
05919     #] CoDropCoefficient :
05920     #[ CoDropSymbols :
05921 */
05922
05923 int CoDropSymbols(UBYTE *s)
05924 {
05925     if ( *s == 0 ) {
05926         Add2Com(TYPEDROPSYMBOLS)
05927         return(0);
05928     }
05929     MesPrint("&Illegal argument in DropSymbols statement: '%s'",s);
05930     return(1);
05931 }
05932 /*
05933     #] CoDropSymbols :
05934     #[ CoToPolynomial :
05935
05936     Converts the current term as much as possible to symbols.
05937     Keeps a list of all objects converted to symbols in AM.sbufnum.
05938     Note that this cannot be executed in parallel because we have only
05939     a single compiler buffer for this. Hence we switch on the noparallel
05940     module option.
05941
05942     Option(s):
05943         OnlyFunctions [,name1][,name2][,...,namem];
05944 */
05945
05946 int CoToPolynomial(UBYTE *inp)
05947 {
05948     int error = 0;
05949     while ( *inp == ' ' || *inp == ',' || *inp == '\t' ) inp++;
05950     if ( ( AC.topolynomialflag & ~TOPOLYNOMIALFLAG ) != 0 ) {
05951         MesPrint("&ToPolynomial statement and FactArg statement are not allowed in the same module");
05952         return(1);
05953     }
05954     if ( AO.OptimizeResult.code != NULL ) {
05955         MesPrint("&Using ToPolynomial statement when there are still optimization results active.");
05956         MesPrint("&Please use #ClearOptimize instruction first.");
05957         MesPrint("&This will loose the optimized expression.");
05958         return(1);
05959     }
05960     if ( *inp == 0 ) {
05961         Add3Com(TYPETOPOLYNOMIAL,DOALL)
05962     }
05963     else {
05964         int numargs = 0;
05965         WORD *funnums = 0, type, num;
05966         UBYTE *s, c;
05967         s = SkipAName(inp);
05968         if ( s == 0 ) return(1);
05969         c = *s; *s = 0;
05970         if ( StrICmp(inp, (UBYTE *)"onlyfunctions") ) {
05971             MesPrint("&Illegal option %s in ToPolynomial statement",inp);
05972             *s = c;
05973             return(1);
05974         }
05975         *s = c;
05976         inp = s;
05977         while ( *inp == ' ' || *inp == ',' || *inp == '\t' ) inp++;
05978         s = inp;
05979         while ( *s ) s++;
05980     /*
05981     Get definitely enough space for the numbers of the functions
05982     */
05983     funnums = (WORD *)Malloc1(((LONG)(s-inp)+3)*sizeof(WORD),"ToPlynomial");
05984     while ( *inp ) {
05985         s = SkipAName(inp);
05986         if ( s == 0 ) return(1);
05987         c = *s; *s = 0;
05988         type = GetName(AC.varnames,inp,&num,WITHAUTO);
05989         if ( type != CFUNCTION ) {

```

```

05990         MesPrint("&%s is not a function in ToPolynomial statement",inp);
05991         error = 1;
05992     }
05993     funnums[3+numargs++] = num+FUNCTION;
05994     *s = c;
05995     inp = s;
05996     while ( *inp == ' ' || *inp == ',' || *inp == '\\t' ) inp++;
05997 }
05998 funnums[0] = TYPETOPOLYNOMIAL;
05999 funnums[1] = numargs+3;
06000 funnums[2] = ONLYFUNCTIONS;
06001
06002 AddNtoL(numargs+3,funnums);
06003 if ( funnums ) M_free(funnums,"ToPolynomial");
06004 }
06005 AC.topolynomialflag |= TOPOLYNOMIALFLAG;
06006 #ifdef WITHMPI
06007 /* In ParFORM, ToPolynomial has to be executed on the master. */
06008 AC.mparallelfldflag |= NOPARALLEL_CONVPOLY;
06009 #endif
06010 return(error);
06011 }
06012
06013 /*
06014 #] CoToPolynomial :
06015 #[ CoFromPolynomial :
06016
06017 Converts the current term as much as possible back from extra symbols
06018 to their original values. Does not look inside functions.
06019 */
06020
06021 int CoFromPolynomial(UBYTE *inp)
06022 {
06023     while ( *inp == ' ' || *inp == ',' || *inp == '\\t' ) inp++;
06024     if ( *inp == 0 ) {
06025         if ( AO.OptimizeResult.code != NULL ) {
06026             MesPrint("&Using FromPolynomial statement when there are still optimization results
active.");
06027             MesPrint("&Please use #ClearOptimize instruction first.");
06028             MesPrint("&This will loose the optimized expression.");
06029             return(1);
06030         }
06031         Add2Com(TYPEFROMPOLYNOMIAL)
06032         return(0);
06033     }
06034     MesPrint("&Illegal argument in FromPolynomial statement: '%s'",inp);
06035     return(1);
06036 }
06037
06038 /*
06039 #] CoFromPolynomial :
06040 #[ CoArgToExtraSymbol :
06041
06042 Converts the specified function arguments into extra symbols.
06043
06044 Syntax: ArgToExtraSymbol [ToNumber] [<argument specifications>]
06045 */
06046
06047 int CoArgToExtraSymbol(UBYTE *s)
06048 {
06049     CBUF *c = cbuf + AC.cbufnum;
06050     WORD *lhs;
06051
06052     /* TODO: resolve interference with rational arithmetic. (#138) */
06053     if ( ( AC.topolynomialflag & ~TOPOLYNOMIALFLAG ) != 0 ) {
06054         MesPrint("&ArgToExtraSymbol statement and FactArg statement are not allowed in the same
module");
06055         return(1);
06056     }
06057     if ( AO.OptimizeResult.code != NULL ) {
06058         MesPrint("&Using ArgToExtraSymbol statement when there are still optimization results
active.");
06059         MesPrint("&Please use #ClearOptimize instruction first.");
06060         MesPrint("&This will loose the optimized expression.");
06061         return(1);
06062     }
06063
06064     SkipSpaces(&s);
06065     int tonumber = ConsumeOption(&s, "tonumber");
06066
06067     int ret = DoArgument(s,TYPEARGTOEXTRASymbol);
06068     if ( ret ) return(ret);
06069
06070     /*
06071     * The "scale" parameter is unused. Instead, we put the "tonumber"
06072     * parameter.
06073     */

```



```

06074     lhs = C->lhs[C->numlhs];
06075     if ( lhs[4] != 1 ) {
06076         Warning("scale parameter (^n) is ignored in ArgToExtraSymbol");
06077     }
06078     lhs[4] = tonumber;
06079
06080     AC.topolynomialflag |= TOPOLYNOMIALFLAG; /* This flag is also used in ParFORM. */
06081 #ifdef WITHMPI
06082     /*
06083      * In ParFORM, the conversion to extra symbols has to be performed on
06084      * the master.
06085      */
06086     AC.mparallelfailflag |= NOPARALLEL_CONVPOLY;
06087 #endif
06088
06089     return(0);
06090 }
06091
06092 /*
06093  #] CoArgToExtraSymbol :
06094  #[ CoExtraSymbols :
06095  */
06096
06097 int CoExtraSymbols(UBYTE *inp)
06098 {
06099     UBYTE *arg1, *arg2, c, *s;
06100     WORD i, j, type, number;
06101     while ( *inp == ' ' || *inp == ',' || *inp == '\t' ) inp++;
06102     if ( FG.cTable[*inp] != 0 ) {
06103         MesPrint("&Illegal argument in ExtraSymbols statement: '%s'",inp);
06104         return(1);
06105     }
06106     arg1 = inp;
06107     while ( FG.cTable[*inp] == 0 ) inp++;
06108     c = *inp; *inp = 0;
06109     if ( ( StrICmp(arg1, (UBYTE *) "array") == 0 )
06110         || ( StrICmp(arg1, (UBYTE *) "vector") == 0 ) ) {
06111         AC.extrasymbols = 1;
06112     }
06113     else if ( StrICmp(arg1, (UBYTE *) "underscore") == 0 ) {
06114         AC.extrasymbols = 0;
06115     }
06116     /*
06117     else if ( StrICmp(arg1, (UBYTE *) "nothing") == 0 ) {
06118         AC.extrasymbols = 2;
06119     }
06120     */
06121     else {
06122         MesPrint("&Illegal keyword in ExtraSymbols statement: '%s'",arg1);
06123         return(1);
06124     }
06125     *inp = c;
06126     while ( *inp == ' ' || *inp == ',' || *inp == '\t' ) inp++;
06127     if ( FG.cTable[*inp] != 0 ) {
06128         MesPrint("&Illegal argument in ExtraSymbols statement: '%s'",inp);
06129         return(1);
06130     }
06131     arg2 = inp;
06132     while ( FG.cTable[*inp] <= 1 ) inp++;
06133     if ( *inp != 0 ) {
06134         MesPrint("&Illegal end of ExtraSymbols statement: '%s'",inp);
06135         return(1);
06136     }
06137     /*
06138     Now check whether this object has been declared already.
06139     That would not be allowed.
06140     */
06141     if ( AC.extrasymbols == 1 ) {
06142         type = GetName(AC.varnames,arg2,&number,NOAUTO);
06143         if ( type != NAMENOTFOUND ) {
06144             MesPrint("&ExtraSymbols statement: '%s' has already been declared before",arg2);
06145             return(1);
06146         }
06147     }
06148     else if ( AC.extrasymbols == 0 ) {
06149         if ( *arg2 == 'N' ) {
06150             s = arg2+1;
06151             while ( FG.cTable[*s] == 1 ) s++;
06152             if ( *s == 0 ) {
06153                 MesPrint("&ExtraSymbols statement: '%s' creates conflicts with summed indices",arg2);
06154                 return(1);
06155             }
06156         }
06157     }
06158     if ( AC.extrasym ) { M_free(AC.extrasym,"extrasym"); AC.extrasym = 0; }
06159     i = inp - arg2 + 1;
06160     AC.extrasym = (UBYTE *) Malloc1(i*sizeof(UBYTE), "extrasym");

```

```

06161     for ( j = 0; j < i; j++ ) AC.extrasym[j] = arg2[j];
06162     return(0);
06163 }
06164
06165 /*
06166     #] CoExtraSymbols :
06167     #[ GetIfDollarFactor :
06168 */
06169
06170 WORD *GetIfDollarFactor(UBYTE **inp, WORD *w)
06171 {
06172     LONG x;
06173     WORD number;
06174     UBYTE *name, c, *s;
06175     s = *inp;
06176     if ( FG.cTable[*s] == 1 ) {
06177         x = 0;
06178         while ( FG.cTable[*s] == 1 ) {
06179             x = 10*x + *s++ - '0';
06180             if ( x >= MAXPOSITIVE ) {
06181                 MesPrint("&Value in dollar factor too large");
06182                 while ( FG.cTable[*s] == 1 ) s++;
06183                 *inp = s;
06184                 return(0);
06185             }
06186         }
06187         *w++ = IFDOLLAREXTRA;
06188         *w++ = 3;
06189         *w++ = -x-1;
06190         *inp = s;
06191         return(w);
06192     }
06193     if ( *s != '$' ) {
06194         MesPrint("&Factor indicator for $-variable should be a number or a $-variable.");
06195         return(0);
06196     }
06197     s++; name = s;
06198     while ( FG.cTable[*s] < 2 ) s++;
06199     c = *s; *s = 0;
06200     if ( GetName(AC.dollarnames,name,&number,NOAUTO) == NAMENOTFOUND ) {
06201         MesPrint("&dollar in if statement should have been defined previously");
06202         return(0);
06203     }
06204     *s = c;
06205     *w++ = IFDOLLAREXTRA;
06206     *w++ = 3;
06207     *w++ = number;
06208     if ( c == '[' ) {
06209         s++;
06210         *inp = s;
06211         if ( ( w = GetIfDollarFactor(inp,w) ) == 0 ) return(0);
06212         s = *inp;
06213         if ( *s != ']' ) {
06214             MesPrint("&unmatched [] in $ in if statement");
06215             return(0);
06216         }
06217         s++;
06218         *inp = s;
06219     }
06220     return(w);
06221 }
06222
06223 /*
06224     #] GetIfDollarFactor :
06225     #[ GetDoParam :
06226 */
06227
06228 UBYTE *GetDoParam(UBYTE *inp, WORD **wp, int par)
06229 {
06230     LONG x;
06231     WORD number;
06232     UBYTE *name, c;
06233     if ( FG.cTable[*inp] == 1 ) {
06234         x = 0;
06235         while ( *inp >= '0' && *inp <= '9' ) {
06236             x = 10*x + *inp++ - '0';
06237             if ( x > MAXPOSITIVE ) {
06238                 if ( par == -1 ) {
06239                     MesPrint("&Value in dollar factor too large");
06240                 }
06241                 else {
06242                     MesPrint("&Value in do loop boundaries too large");
06243                 }
06244                 while ( FG.cTable[*inp] == 1 ) inp++;
06245                 return(0);
06246             }
06247         }

```

```

06248         if ( par > 0 ) {
06249             *(*wp)++ = SNUMBER;
06250             *(*wp)++ = (WORD)x;
06251         }
06252         else {
06253             *(*wp)++ = DOLLAREXP2;
06254             *(*wp)++ = -( (WORD)x)-1;
06255         }
06256         return(inp);
06257     }
06258     if ( *inp != '$' ) {
06259         return(0);
06260     }
06261     inp++; name = inp;
06262     while ( FG.cTable[*inp] < 2 ) inp++;
06263     c = *inp; *inp = 0;
06264     if ( GetName(AC.dollarnames,name,&number,NOAUTO) == NAMENOTFOUND ) {
06265         if ( par == -1 ) {
06266             MesPrint("&dollar in print statement should have been defined previously");
06267         }
06268         else {
06269             MesPrint("&dollar in do loop boundaries should have been defined previously");
06270         }
06271         return(0);
06272     }
06273     *inp = c;
06274     if ( par > 0 ) {
06275         *(*wp)++ = DOLLAREXP2;
06276         *(*wp)++ = number;
06277     }
06278     else {
06279         *(*wp)++ = DOLLAREXP2;
06280         *(*wp)++ = number;
06281     }
06282     if ( c == '[' ) {
06283         inp++;
06284         inp = GetDoParam(inp,wp,0);
06285         if ( inp == 0 ) return(0);
06286         if ( *inp != ']' ) {
06287             if ( par == -1 ) {
06288                 MesPrint("&unmatched [] in $ in print statement");
06289             }
06290             else {
06291                 MesPrint("&unmatched [] in do loop boundaries");
06292             }
06293             return(0);
06294         }
06295         inp++;
06296     }
06297     return(inp);
06298 }
06299
06300 /*
06301 #] GetDoParam :
06302 #[ CoDo :
06303 */
06304
06305 int CoDo(UBYTE *inp)
06306 {
06307     GETIDENTITY
06308     CBUF *C = cbuf+AC.cbunum;
06309     WORD *w, numparam;
06310     int error = 0, i;
06311     UBYTE *name, c;
06312     if ( AC.doloopstack == 0 ) {
06313         AC.doloopstacksize = 20;
06314         AC.doloopstack = (WORD *)Malloc1(AC.doloopstacksize*2*sizeof(WORD),"doloop stack");
06315         AC.doloopnest = AC.doloopstack + AC.doloopstacksize;
06316     }
06317     if ( AC.dolooplevel >= AC.doloopstacksize ) {
06318         WORD *newstack, *newnest, newsize;
06319         newsize = AC.doloopstacksize * 2;
06320         newstack = (WORD *)Malloc1(newsize*2*sizeof(WORD),"doloop stack");
06321         newnest = newstack + newsize;
06322         for ( i = 0; i < newsize; i++ ) {
06323             newstack[i] = AC.doloopstack[i];
06324             newnest[i] = AC.doloopnest[i];
06325         }
06326         M_free(AC.doloopstack,"doloop stack");
06327         AC.doloopstack = newstack;
06328         AC.doloopnest = newnest;
06329         AC.doloopstacksize = newsize;
06330     }
06331     AC.doloopnest[AC.dolooplevel] = NestingChecksum();
06332
06333     w = AT.WorkPointer;
06334     *w++ = TYPEDOLOOP;

```

```

06335     w++; /* Space for the length of the statement */
06336 /*
06337 Now the $loopvariable
06338 */
06339 while ( *inp == ',' ) inp++;
06340 if ( *inp != '$' ) {
06341     error = 1;
06342     MesPrint("&do loop parameter should be a dollar variable");
06343 }
06344 else {
06345     inp++;
06346     name = inp;
06347     if ( FG.cTable[*inp] != 0 ) {
06348         error = 1;
06349         MesPrint("&illegal name for do loop parameter");
06350     }
06351     while ( FG.cTable[*inp] < 2 ) inp++;
06352     c = *inp; *inp = 0;
06353     if ( GetName(AC.dollarnames,name,&numparam,NOAUTO) == NAMENOTFOUND ) {
06354         numparam = AddDollar(name,DOLUNDEFINED,0,0);
06355     }
06356     *w++ = numparam;
06357     *inp = c;
06358     AddPotModdollar(numparam);
06359 }
06360 w++; /* space for the level of the enddo statement */
06361 while ( *inp == ',' ) inp++;
06362 if ( *inp != '=' ) goto IllSyntax;
06363 inp++;
06364 while ( *inp == ',' ) inp++;
06365 /*
06366 The start value
06367 */
06368 inp = GetDoParam(inp,&w,1);
06369 if ( inp == 0 || *inp != ',' ) goto IllSyntax;
06370 while ( *inp == ',' ) inp++;
06371 /*
06372 The end value
06373 */
06374 inp = GetDoParam(inp,&w,1);
06375 if ( inp == 0 || ( *inp != 0 && *inp != ',' ) ) goto IllSyntax;
06376 /*
06377 The increment value
06378 */
06379 if ( *inp != ',' ) {
06380     if ( *inp == 0 ) { *w++ = SNUMBER; *w++ = 1; }
06381     else goto IllSyntax;
06382 }
06383 else {
06384     while ( *inp == ',' ) inp++;
06385     inp = GetDoParam(inp,&w,1);
06386 }
06387 if ( inp == 0 || *inp != 0 ) goto IllSyntax;
06388 *w = 0;
06389 AT.WorkPointer[1] = w - AT.WorkPointer;
06390 /*
06391 Put away and set information for placing enddo information.
06392 */
06393 AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
06394 AC.doloopstack[AC.dolooplevel++] = C->numlhs;
06395
06396 return(error);
06397
06398 IllSyntax:
06399 MesPrint("&Illegal syntax for do statement");
06400 return(1);
06401 }
06402
06403 /*
06404 #] CoDo :
06405 #[ CoEndDo :
06406 */
06407
06408 int CoEndDo(UBYTE *inp)
06409 {
06410     CBUF *C = cbuf+AC.cbufnum;
06411     WORD scratch[3];
06412     while ( *inp == ',' ) inp++;
06413     if ( *inp ) {
06414         MesPrint("&Illegal syntax for EndDo statement");
06415         return(1);
06416     }
06417     if ( AC.dolooplevel <= 0 ) {
06418         MesPrint("&EndDo without corresponding Do statement");
06419         return(1);
06420     }
06421     AC.dolooplevel--;

```

```

06422     scratch[0] = TYPEENDDOLOOP;
06423     scratch[1] = 3;
06424     scratch[2] = AC.doloopstack[AC.dolooplevel];
06425     AddNtoL(3,scratch);
06426     cbuf[AC.cbunum].lhs[AC.doloopstack[AC.dolooplevel]][3] = C->numlhs;
06427     if ( AC.doloopnest[AC.dolooplevel] != NestingChecksum() ) {
06428         MesNesting();
06429         return(1);
06430     }
06431     return(0);
06432 }
06433
06434 /*
06435  #] CoEndDo :
06436  #[ CoFactDollar :
06437  */
06438
06439 int CoFactDollar(UBYTE *inp)
06440 {
06441     WORD numdollar;
06442     if ( *inp == '$' ) {
06443         if ( GetName(AC.dollarnames,inp+1,&numdollar,NOAUTO) != CDOLLAR ) {
06444             MesPrint("&%s is undefined",inp);
06445             numdollar = AddDollar(inp+1,DOLINDEX,&one,1);
06446             return(1);
06447         }
06448         inp = SkipAName(inp+1);
06449         if ( *inp != 0 ) {
06450             MesPrint("&FactDollar should have a single $variable for its argument");
06451             return(1);
06452         }
06453         AddPotModdollar(numdollar);
06454     }
06455     else {
06456         MesPrint("&%s is not a $-variable",inp);
06457         return(1);
06458     }
06459     Add3Com(TYPEFACTOR,numdollar);
06460     return(0);
06461 }
06462
06463 /*
06464  #] CoFactDollar :
06465  #[ CoFactorize :
06466  */
06467
06468 int CoFactorize(UBYTE *s) { return(DoFactorize(s,1)); }
06469
06470 /*
06471  #] CoFactorize :
06472  #[ CoNFactorize :
06473  */
06474
06475 int CoNFactorize(UBYTE *s) { return(DoFactorize(s,0)); }
06476
06477 /*
06478  #] CoNFactorize :
06479  #[ CoUnFactorize :
06480  */
06481
06482 int CoUnFactorize(UBYTE *s) { return(DoFactorize(s,3)); }
06483
06484 /*
06485  #] CoUnFactorize :
06486  #[ CoNUnFactorize :
06487  */
06488
06489 int CoNUnFactorize(UBYTE *s) { return(DoFactorize(s,2)); }
06490
06491 /*
06492  #] CoNUnFactorize :
06493  #[ DoFactorize :
06494  */
06495
06496 int DoFactorize(UBYTE *s,int par)
06497 {
06498     EXPRESSIONS e;
06499     WORD i;
06500     WORD number;
06501     UBYTE *t, c;
06502     int error = 0, keepzeroflag = 0;
06503     if ( *s == '(' ) {
06504         s++;
06505         while ( *s != ')' && *s ) {
06506             if ( FG.cTable[*s] == 0 ) {
06507                 t = s; while ( FG.cTable[*s] == 0 ) s++;
06508                 c = *s; *s = 0;

```

```

06509         if ( StrICmp((UBYTE *)"keepzero",t) == 0 ) {
06510             keepzeroflag = 1;
06511         }
06512         else {
06513             MesPrint("&Illegal option in [N][Un]Factorize statement: %s",t);
06514             error = 1;
06515         }
06516         *s = c;
06517     }
06518     while ( *s == ',' ) s++;
06519     if ( *s && *s != ')' && FG.cTable[*s] != 0 ) {
06520         MesPrint("&Illegal character in option field of [N][Un]Factorize statement");
06521         error = 1;
06522         return(error);
06523     }
06524 }
06525 if ( *s ) s++;
06526 while ( *s == ',' || *s == ' ' ) s++;
06527 }
06528 if ( *s == 0 ) {
06529     for ( i = NumExpressions-1; i >= 0; i-- ) {
06530         e = Expressions+i;
06531         if ( e->replace >= 0 ) {
06532             e = Expressions + e->replace;
06533         }
06534         if ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION
06535             || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEXPRESSION
06536             || e->status == INTOHIDELEXPRESSION || e->status == INTOHIDEGEXPRESSION
06537         ) {
06538             switch ( par ) {
06539                 case 0:
06540                     e->vflags &= ~TOBEFACTORED;
06541                     break;
06542                 case 1:
06543                     e->vflags |= TOBEFACTORED;
06544                     e->vflags &= ~TOBEUNFACTORED;
06545                     break;
06546                 case 2:
06547                     e->vflags &= ~TOBEUNFACTORED;
06548                     break;
06549                 case 3:
06550                     e->vflags |= TOBEUNFACTORED;
06551                     e->vflags &= ~TOBEFACTORED;
06552                     break;
06553             }
06554         }
06555         if ( ( e->vflags & TOBEFACTORED ) != 0 ) {
06556             if ( keepzeroflag ) e->vflags |= KEEPZERO;
06557             else e->vflags &= ~KEEPZERO;
06558         }
06559         else e->vflags &= ~KEEPZERO;
06560     }
06561 }
06562 else {
06563     for(;;) { /* Look for a (comma separated) list of variables */
06564         while ( *s == ',' ) s++;
06565         if ( *s == 0 ) break;
06566         if ( *s == '[' || FG.cTable[*s] == 0 ) {
06567             t = s;
06568             if ( ( s = SkipAName(s) ) == 0 ) {
06569                 MesPrint("&Improper name for an expression: '%s'",t);
06570                 return(1);
06571             }
06572             c = *s; *s = 0;
06573             if ( GetName(AC.exprnames,t,&number,NOAUTO) == CEXPRESSION ) {
06574                 e = Expressions+number;
06575                 if ( e->replace >= 0 ) {
06576                     e = Expressions + e->replace;
06577                 }
06578                 if ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION
06579                     || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEXPRESSION
06580                     || e->status == INTOHIDELEXPRESSION || e->status == INTOHIDEGEXPRESSION
06581                 ) {
06582                     switch ( par ) {
06583                         case 0:
06584                             e->vflags &= ~TOBEFACTORED;
06585                             break;
06586                         case 1:
06587                             e->vflags |= TOBEFACTORED;
06588                             e->vflags &= ~TOBEUNFACTORED;
06589                             break;
06590                         case 2:
06591                             e->vflags &= ~TOBEUNFACTORED;
06592                             break;
06593                         case 3:
06594                             e->vflags |= TOBEUNFACTORED;
06595                             e->vflags &= ~TOBEFACTORED;

```

```

06596                                     break;
06597                                     }
06598                                     }
06599                                     if ( ( e->vflags & TOBEFACTORED ) != 0 ) {
06600                                         if ( keepzeroflag ) e->vflags |= KEEPZERO;
06601                                         else e->vflags &= ~KEEPZERO;
06602                                     }
06603                                     else e->vflags &= ~KEEPZERO;
06604                                     }
06605                                     else if ( GetName(AC.varnames,t,&number,NOAUTO) != NAMENOTFOUND ) {
06606                                         MesPrint("%s is not an expression",t);
06607                                         error = 1;
06608                                     }
06609                                     *s = c;
06610                                 }
06611                                 else {
06612                                     MesPrint("&Illegal object in (N)Factorize statement");
06613                                     error = 1;
06614                                     while ( *s && *s != ',' ) s++;
06615                                     if ( *s == 0 ) break;
06616                                 }
06617                             }
06618                         }
06619                     }
06620                     return(error);
06621 }
06622
06623 /*
06624 #] DoFactorize :
06625 #[ CoOptimizeOption :
06626 */
06627
06628 int CoOptimizeOption(UBYTE *s)
06629 {
06630     UBYTE *name, *t1, *t2, c1, c2, *value, *u;
06631     int error = 0, x;
06632     double d;
06633     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
06634     while ( *s ) {
06635         name = s; while ( FG.cTable[*s] == 0 ) s++;
06636         t1 = s; c1 = *t1;
06637         while ( *s == ' ' || *s == '\t' ) s++;
06638         if ( *s != '=' ) {
06639             correctuse:
06640                 MesPrint("&Correct use in Format,Optimize statement is Optionname=value");
06641                 error = 1;
06642                 while ( *s == ' ' || *s == ',' || *s == '\t' || *s == '=' ) s++;
06643                 *t1 = c1;
06644                 continue;
06645             }
06646             *t1 = 0;
06647             s++;
06648             while ( *s == ' ' || *s == '\t' ) s++;
06649             if ( *s == 0 ) goto correctuse;
06650             value = s;
06651             while ( FG.cTable[*s] <= 1 || *s=='.' || *s=='*' || *s=='(' || *s==')' ) {
06652                 if ( *s == '(' ) { SKIPBRA4(s) }
06653                 s++;
06654             }
06655             t2 = s; c2 = *t2;
06656             while ( *s == ' ' || *s == '\t' ) s++;
06657             if ( *s && *s != ',' ) goto correctuse;
06658             if ( *s ) {
06659                 s++;
06660                 while ( *s == ' ' || *s == '\t' ) s++;
06661             }
06662             *t2 = 0;
06663         }
06664     /*
06665     Now we have name=value with name and value zero terminated strings.
06666     */
06667     if ( StrICmp(name,(UBYTE *)"horner") == 0 ) {
06668         if ( StrICmp(value,(UBYTE *)"occurrence") == 0 ) {
06669             AO.Optimize.horner = O_OCCURRENCE;
06670         }
06671         else if ( StrICmp(value,(UBYTE *)"mcts") == 0 ) {
06672             AO.Optimize.horner = O_MCTS;
06673         }
06674         else if ( StrICmp(value,(UBYTE *)"sa") == 0 ) {
06675             AO.Optimize.horner = O_SIMULATED_ANNEALING;
06676         }
06677         else {
06678             AO.Optimize.horner = -1;
06679             MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s",name,value);
06680             error = 1;
06681         }
06682     }

```

```

06683     else if ( StrICmp(name, (UBYTE *)"hornerdirection") == 0 ) {
06684         if ( StrICmp(value, (UBYTE *)"forward") == 0 ) {
06685             AO.Optimize.hornerdirection = O_FORWARD;
06686         }
06687         else if ( StrICmp(value, (UBYTE *)"backward") == 0 ) {
06688             AO.Optimize.hornerdirection = O_BACKWARD;
06689         }
06690         else if ( StrICmp(value, (UBYTE *)"forwardorbackward") == 0 ) {
06691             AO.Optimize.hornerdirection = O_FORWARDORBACKWARD;
06692         }
06693         else if ( StrICmp(value, (UBYTE *)"forwardandbackward") == 0 ) {
06694             AO.Optimize.hornerdirection = O_FORWARDANDBACKWARD;
06695         }
06696         else {
06697             AO.Optimize.method = -1;
06698             MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s", name, value);
06699             error = 1;
06700         }
06701     }
06702     else if ( StrICmp(name, (UBYTE *)"method") == 0 ) {
06703         if ( StrICmp(value, (UBYTE *)"none") == 0 ) {
06704             AO.Optimize.method = O_NONE;
06705         }
06706         else if ( StrICmp(value, (UBYTE *)"cse") == 0 ) {
06707             AO.Optimize.method = O_CSE;
06708         }
06709         else if ( StrICmp(value, (UBYTE *)"csegreedy") == 0 ) {
06710             AO.Optimize.method = O_CSEGREEDY;
06711         }
06712         else if ( StrICmp(value, (UBYTE *)"greedy") == 0 ) {
06713             AO.Optimize.method = O_GREEDY;
06714         }
06715         else {
06716             AO.Optimize.method = -1;
06717             MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s", name, value);
06718             error = 1;
06719         }
06720     }
06721     else if ( StrICmp(name, (UBYTE *)"timelimit") == 0 ) {
06722         x = 0;
06723         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06724         if ( *u != 0 ) {
06725             MesPrint("&Option TimeLimit in Format,Optimize statement should be a positive number: %s", value);
06726             AO.Optimize.mctstimelimit = 0;
06727             AO.Optimize.greedytimelimit = 0;
06728             error = 1;
06729         }
06730         else {
06731             AO.Optimize.mctstimelimit = x/2;
06732             AO.Optimize.greedytimelimit = x/2;
06733         }
06734     }
06735     else if ( StrICmp(name, (UBYTE *)"mctstimelimit") == 0 ) {
06736         x = 0;
06737         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06738         if ( *u != 0 ) {
06739             MesPrint("&Option MCTSTimeLimit in Format,Optimize statement should be a positive number: %s", value);
06740             AO.Optimize.mctstimelimit = 0;
06741             error = 1;
06742         }
06743         else {
06744             AO.Optimize.mctstimelimit = x;
06745         }
06746     }
06747     else if ( StrICmp(name, (UBYTE *)"mctsnunexpand") == 0 ) {
06748         int y;
06749         x = 0;
06750         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06751         if ( *u == '*' || *u == 'x' || *u == 'X' ) {
06752             u++; y = x;
06753             x = 0;
06754             while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06755         }
06756         else { y = 1; }
06757         if ( *u != 0 ) {
06758             MesPrint("&Option MCTSNunExpand in Format,Optimize statement should be a positive number: %s", value);
06759             AO.Optimize.mctsnunexpand= 0;
06760             AO.Optimize.mctsnunrepeat= 1;
06761             error = 1;
06762         }
06763         else {
06764             AO.Optimize.mctsnunexpand= x;
06765             AO.Optimize.mctsnunrepeat= y;
06766         }

```



```

06767     }
06768     else if ( StrICmp(name, (UBYTE *) "mctsnnumrepeat") == 0 ) {
06769         x = 0;
06770         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06771         if ( *u != 0 ) {
06772             MesPrint("&Option MCTSNnumExpand in Format,Optimize statement should be a positive
number: %s",value);
06773             AO.Optimize.mctsnnumrepeat= 1;
06774             error = 1;
06775         }
06776         else {
06777             AO.Optimize.mctsnnumrepeat= x;
06778         }
06779     }
06780     else if ( StrICmp(name, (UBYTE *) "mctsnnumkeep") == 0 ) {
06781         x = 0;
06782         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06783         if ( *u != 0 ) {
06784             MesPrint("&Option MCTSNnumKeep in Format,Optimize statement should be a positive
number: %s",value);
06785             AO.Optimize.mctsnnumkeep= 0;
06786             error = 1;
06787         }
06788         else {
06789             AO.Optimize.mctsnnumkeep= x;
06790         }
06791     }
06792     else if ( StrICmp(name, (UBYTE *) "mctskonstant") == 0 ) {
06793         d = 0;
06794         if ( sscanf ((char*)value, "%lf", &d) != 1 ) {
06795             MesPrint("&Option MCTSKonstant in Format,Optimize statement should be a positive
number: %s",value);
06796             AO.Optimize.mctskonstant.fval = 0;
06797             error = 1;
06798         }
06799         else {
06800             AO.Optimize.mctskonstant.fval = d;
06801         }
06802     }
06803     else if ( StrICmp(name, (UBYTE *) "greedytimelimit") == 0 ) {
06804         x = 0;
06805         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06806         if ( *u != 0 ) {
06807             MesPrint("&Option GreedyTimeLimit in Format,Optimize statement should be a positive
number: %s",value);
06808             AO.Optimize.greedytimelimit = 0;
06809             error = 1;
06810         }
06811         else {
06812             AO.Optimize.greedytimelimit = x;
06813         }
06814     }
06815     else if ( StrICmp(name, (UBYTE *) "greedyminnum") == 0 ) {
06816         x = 0;
06817         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06818         if ( *u != 0 ) {
06819             MesPrint("&Option GreedyMinNum in Format,Optimize statement should be a positive
number: %s",value);
06820             AO.Optimize.greedyminnum= 0;
06821             error = 1;
06822         }
06823         else {
06824             AO.Optimize.greedyminnum= x;
06825         }
06826     }
06827     else if ( StrICmp(name, (UBYTE *) "greedymaxperc") == 0 ) {
06828         x = 0;
06829         u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06830         if ( *u != 0 ) {
06831             MesPrint("&Option GreedyMaxPerc in Format,Optimize statement should be a positive
number: %s",value);
06832             AO.Optimize.greedymaxperc= 0;
06833             error = 1;
06834         }
06835         else {
06836             AO.Optimize.greedymaxperc= x;
06837         }
06838     }
06839     else if ( StrICmp(name, (UBYTE *) "stats") == 0 ) {
06840         if ( StrICmp(value, (UBYTE *) "on") == 0 ) {
06841             AO.Optimize.printstats = 1;
06842         }
06843         else if ( StrICmp(value, (UBYTE *) "off") == 0 ) {
06844             AO.Optimize.printstats = 0;
06845         }
06846         else {
06847             AO.Optimize.printstats = 0;

```

```

06848         MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s",name,value);
06849         error = 1;
06850     }
06851 }
06852 else if ( StrICmp(name,(UBYTE *)"printscheme") == 0 ) {
06853     if ( StrICmp(value,(UBYTE *)"on") == 0 ) {
06854         AO.Optimize.schemeflags |= 1;
06855     }
06856     else if ( StrICmp(value,(UBYTE *)"off") == 0 ) {
06857         AO.Optimize.schemeflags &= ~1;
06858     }
06859     else {
06860         AO.Optimize.schemeflags &= ~1;
06861         MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s",name,value);
06862         error = 1;
06863     }
06864 }
06865 else if ( StrICmp(name,(UBYTE *)"debugflag") == 0 ) {
06866     /*
06867         This option is for debugging purposes only. Not in the manual!
06868         0x1: Print statements in reverse order.
06869         0x2: Print the scheme of the variables.
06870     */
06871     x = 0;
06872     u = value;
06873     if ( FG.cTable[*u] == 1 ) {
06874         while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06875         if ( *u != 0 ) {
06876             MesPrint("&Numerical value for DebugFlag in Format,Optimize statement should be a
nonnegative number: %s",value);
06877             AO.Optimize.debugflags = 0;
06878             error = 1;
06879         }
06880         else {
06881             AO.Optimize.debugflags = x;
06882         }
06883     }
06884     else if ( StrICmp(value,(UBYTE *)"on") == 0 ) {
06885         AO.Optimize.debugflags = 1;
06886     }
06887     else if ( StrICmp(value,(UBYTE *)"off") == 0 ) {
06888         AO.Optimize.debugflags = 0;
06889     }
06890     else {
06891         AO.Optimize.debugflags = 0;
06892         MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s",name,value);
06893         error = 1;
06894     }
06895 }
06896 else if ( StrICmp(name,(UBYTE *)"scheme") == 0 ) {
06897     UBYTE *ss, *s1, c;
06898     WORD type, numsym;
06899     AO.schemenum = 0;
06900     u = value;
06901     if ( *u != '(' ) {
06902         noscheme:
06903             MesPrint("&Option Scheme in Format,Optimize statement should be an array of names or
integers between (): %s",value);
06904             error = 1;
06905             break;
06906         }
06907         u++; ss = u;
06908         while ( *ss == ' ' || *ss == '\t' || *ss == ',' ) ss++;
06909         if ( FG.cTable[*ss] == 0 || *ss == '$' || *ss == '[' ) { /* Name */
06910             s1 = u; SKIPBRA3(s1)
06911             if ( *s1 != ')' ) goto noscheme;
06912             while ( ss < s1 ) { if ( *ss++ == ',' ) AO.schemenum++; }
06913             *ss++ = 0; while ( *ss == ' ' ) ss++;
06914             if ( *ss != 0 ) goto noscheme;
06915             ss = u;
06916             if ( AO.schemenum < 1 ) {
06917                 MesPrint("&Option Scheme in Format,Optimize statement should have at least one
name or number between ()");
06918                 error = 1;
06919                 break;
06920             }
06921             if ( AO.inscheme ) M_free(AO.inscheme,"Horner input scheme");
06922             AO.inscheme = (WORD *)Malloc1((AO.schemenum+1)*sizeof(WORD),"Horner input scheme");
06923             while ( *ss == ' ' || *ss == '\t' || *ss == ',' ) ss++;
06924             AO.schemenum = 0;
06925             for(;;) {
06926                 if ( *ss == 0 ) break;
06927                 s1 = ss; ss = SkipAName(s1); c = *ss; *ss = 0;
06928
06929                 if ( ss[-1] == '_' ) {
06930                     /*
06931                         Now AC.extrasym followed by a number and _

```

```

06932 */
06933     UBYTE *u1, *u2;
06934     u1 = s1; u2 = AC.extrasym;
06935     while ( *u1 == *u2 ) { u1++; u2++; }
06936     if ( *u2 == 0 ) { /* Good start */
06937         numsym = 0;
06938         while ( *u1 >= '0' && *u1 <= '9' ) numsym = 10*numsym + *u1++ - '0';
06939         if ( u1 != ss-1 || numsym == 0 || AC.extrasymbols != 0 ) {
06940             MesPrint("&Improper use of extra symbol in scheme format option");
06941             goto noscheme;
06942         }
06943         numsym = MAXVARIABLES-numsym;
06944         ss++;
06945         goto GotTheNumber;
06946     }
06947 }
06948 else if ( *s1 == '$' ) {
06949     GETIDENTITY
06950     int numdollar;
06951     if ( ( numdollar = GetDollar(s1+1) ) < 0 ) {
06952         MesPrint("&Undefined variable %s",s1);
06953         error = 5;
06954     }
06955     else if ( ( numsym = DolToSymbol(BHEAD numdollar) ) < 0 ) {
06956         MesPrint("&$$s does not evaluate to a symbol",s1);
06957         error = 5;
06958     }
06959     *ss = c;
06960     goto GotTheNumber;
06961 }
06962 else if ( c == '(' ) {
06963     if ( StrCmp(s1,AC.extrasym) == 0 ) {
06964         if ( (AC.extrasymbols&1) != 1 ) {
06965             MesPrint("&Improper use of extra symbol in scheme format option");
06966             goto noscheme;
06967         }
06968         *ss++ = c;
06969         numsym = 0;
06970         while ( *ss >= '0' && *ss <= '9' ) numsym = 10*numsym + *ss++ - '0';
06971         if ( *ss != ')' ) {
06972             MesPrint("&Extra symbol should have a number for its argument.");
06973             goto noscheme;
06974         }
06975         numsym = MAXVARIABLES-numsym;
06976         ss++;
06977         goto GotTheNumber;
06978     }
06979 }
06980 type = GetName(AC.varnames,s1,&numsym,WITHAUTO);
06981 if ( ( type != CSYMBOL ) && type != CDUBIOUS ) {
06982     MesPrint("&$$s is not a symbol",s1);
06983     error = 4;
06984     if ( type < 0 ) numsym = AddSymbol(s1,-MAXPOWER,MAXPOWER,0,0);
06985 }
06986 *ss = c;
06987 GotTheNumber:
06988     AO.inscheme[AO.schemenum++] = numsym;
06989     while ( *ss == ' ' || *ss == '\t' || *ss == ',' ) ss++;
06990 }
06991 }
06992 }
06993 else if ( StrICmp(name,(UBYTE *)"mctsdecaymode") == 0 ) {
06994     x = 0;
06995     u = value;
06996     if ( FG.cTable[*u] == 1 ) {
06997         while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
06998         if ( *u != 0 ) {
06999             MesPrint("&Option MCTSDecayMode in Format,Optimize statement should be a
nonnegative integer: %s",value);
07000             AO.Optimize.mctsdecaymode = 0;
07001             error = 1;
07002         }
07003         else {
07004             AO.Optimize.mctsdecaymode = x;
07005         }
07006     }
07007     else {
07008         AO.Optimize.mctsdecaymode = 0;
07009         MesPrint("&Unrecognized option value in Format,Optimize statement: %s=%s",name,value);
07010         error = 1;
07011     }
07012 }
07013 else if ( StrICmp(name,(UBYTE *)"saiter") == 0 ) {
07014     x = 0;
07015     u = value; while ( *u >= '0' && *u <= '9' ) x = 10*x + *u++ - '0';
07016     if ( *u != 0 ) {
07017         MesPrint("&Option SAIter in Format,Optimize statement should be a positive integer:

```

```

    %s",value);
07018         AO.Optimize.saIter = 0;
07019         error = 1;
07020     }
07021     else {
07022         AO.Optimize.saIter= x;
07023     }
07024 }
07025 else if ( StrICmp(name,(UBYTE *)"samaxt") == 0 ) {
07026     d = 0;
07027     if ( sscanf ((char*)value, "%lf", &d) != 1 ) {
07028         MesPrint("&Option SAMaxT in Format,Optimize statement should be a positive number:
%s",value);
07029         AO.Optimize.saMaxT.fval = 0;
07030         error = 1;
07031     }
07032     else {
07033         AO.Optimize.saMaxT.fval = d;
07034     }
07035 }
07036 else if ( StrICmp(name,(UBYTE *)"samint") == 0 ) {
07037     d = 0;
07038     if ( sscanf ((char*)value, "%lf", &d) != 1 ) {
07039         MesPrint("&Option SAMinT in Format,Optimize statement should be a positive number:
%s",value);
07040         AO.Optimize.saMinT.fval = 0;
07041         error = 1;
07042     }
07043     else {
07044         AO.Optimize.saMinT.fval = d;
07045     }
07046 }
07047 else {
07048     MesPrint("&Unrecognized option name in Format,Optimize statement: %s",name);
07049     error = 1;
07050 }
07051 *t1 = c1; *t2 = c2;
07052 }
07053 return(error);
07054 }
07055
07056 /*
07057 #] CoOptimizeOption :
07058 #[ DoPutInside :
07059
07060 Syntax:
07061 PutIn[side],functionname[,brackets] -> par = 1
07062 AntiPutIn[side],functionname,antibrackets -> par = -1
07063 */
07064
07065 int CoPutInside(UBYTE *inp) { return(DoPutInside(inp,1)); }
07066 int CoAntiPutInside(UBYTE *inp) { return(DoPutInside(inp,-1)); }
07067
07068 int DoPutInside(UBYTE *inp, int par)
07069 {
07070     GETIDENTITY
07071     UBYTE *p, c;
07072     WORD *to, type, c1,c2,funnum, *WorkSave;
07073     int error = 0;
07074     while ( *inp == ' ' || *inp == '\t' || *inp == ',' ) inp++;
07075 /*
07076     First we need the name of a function. (Not a tensor or table!)
07077 */
07078     p = SkipAName(inp);
07079     if ( p == 0 ) return(1);
07080     c = *p; *p = 0;
07081     type = GetName(AC.varnames,inp,&funnum,WITHAUTO);
07082     if ( type != CFUNCTION || functions[funnum].tabl != 0 || functions[funnum].spec ) {
07083         MesPrint("&PutInside/AntiPutInside expects a regular function for its first argument");
07084         MesPrint("&Argument is %s",inp);
07085         error = 1;
07086     }
07087     funnum += FUNCTION;
07088     *p = c;
07089     inp = p;
07090     while ( *inp == ' ' || *inp == '\t' || *inp == ',' ) inp++;
07091     if ( *inp == 0 ) {
07092         if ( par == 1 ) {
07093             WORD tocompiler[4];
07094             tocompiler[0] = TYPEPUTINSIDE;
07095             tocompiler[1] = 4;
07096             tocompiler[2] = 0;
07097             tocompiler[3] = funnum;
07098             AddNtoL(4,tocompiler);
07099         }
07100         else {
07101             MesPrint("&AntiPutInside needs inside information.");

```

```

07102         error = 1;
07103     }
07104     return(error);
07105 }
07106 WorkSave = to = AT.WorkPointer;
07107 *to++ = TYPEPUTINSIDE;
07108 *to++ = 4;
07109 *to++ = par;
07110 *to++ = funnum;
07111 to++;
07112 while ( *inp ) {
07113     while ( *inp == ' ' || *inp == '\t' || *inp == ',' ) inp++;
07114     if ( *inp == 0 ) break;
07115     p = SkipAName(inp);
07116     if ( p == 0 ) { error = 1; break; }
07117     c = *p; *p = 0;
07118     type = GetName(AC.varnames,inp,&c1,WITHAUTO);
07119     if ( c == '.' ) {
07120         if ( type == CVECTOR || type == CDUBIOUS ) {
07121             *p++ = c;
07122             inp = p;
07123             p = SkipAName(inp);
07124             if ( p == 0 ) return(1);
07125             c = *p; *p = 0;
07126             type = GetName(AC.varnames,inp,&c2,WITHAUTO);
07127             if ( type != CVECTOR && type != CDUBIOUS ) {
07128                 MesPrint("&Not a vector in dotproduct in PutInside/AntiPutInside statement:
%s",inp);
07129                 error = 1;
07130             }
07131             else type = CDOTPRODUCT;
07132         }
07133         else {
07134             MesPrint("&Illegal use of . after %s in PutInside/AntiPutInside statement",inp);
07135             error = 1;
07136             *p = c; inp = p;
07137             continue;
07138         }
07139     }
07140     switch ( type ) {
07141         case CSYMBOL :
07142             *to++ = SYMBOL; *to++ = 4; *to++ = c1; *to++ = 1; break;
07143         case CVECTOR :
07144             *to++ = INDEX; *to++ = 3; *to++ = AM.OffsetVector + c1; break;
07145         case CFUNCTION :
07146             *to++ = c1+FUNCTION; *to++ = FUNHEAD; *to++ = 0;
07147             FILLFUN3(to)
07148             break;
07149         case CDOTPRODUCT :
07150             *to++ = DOTPRODUCT; *to++ = 5; *to++ = c1 + AM.OffsetVector;
07151             *to++ = c2 + AM.OffsetVector; *to++ = 1; break;
07152         case CDELTA :
07153             *to++ = DELTA; *to++ = 4; *to++ = EMPTYINDEX; *to++ = EMPTYINDEX; break;
07154         default :
07155             MesPrint("&Illegal variable request for %s in PutInside/AntiPutInside statement",inp);
07156             error = 1; break;
07157     }
07158     *p = c;
07159     inp = p;
07160 }
07161 *to++ = 1; *to++ = 1; *to++ = 3;
07162 AT.WorkPointer[1] = to - AT.WorkPointer;
07163 AT.WorkPointer[4] = AT.WorkPointer[1]-4;
07164 AT.WorkPointer = to;
07165 AC.BracketNormalize = 1;
07166 if ( Normalize(BHEAD WorkSave+4) ) { error = 1; }
07167 else {
07168     WorkSave[1] = WorkSave[4]+4;
07169     to = WorkSave + WorkSave[1] - 1;
07170     c1 = ABS(*to);
07171     WorkSave[1] -= c1;
07172     WorkSave[4] -= c1;
07173     AddNtoL(WorkSave[1],WorkSave);
07174 }
07175 AC.BracketNormalize = 0;
07176 AT.WorkPointer = WorkSave;
07177 return(error);
07178 }
07179
07180 /*
07181 #] DoPutInside :
07182 #[ CoSwitch :
07183
07184 Syntax: Switch $var;
07185 Be careful with illegal nestings with repeat, if, while.
07186 */
07187

```

```

07188 int CoSwitch(UBYTE *s)
07189 {
07190     WORD numdollar;
07191     SWITCH *sw;
07192     if ( *s == '$' ) {
07193         if ( GetName(AC.dollarnames,s+1,&numdollar,NOAUTO) != CDOLLAR ) {
07194             MesPrint("%s is undefined in switch statement",s);
07195             numdollar = AddDollar(s+1,DOLINDEX,&one,1);
07196             return(1);
07197         }
07198         s = SkipAName(s+1);
07199         if ( *s != 0 ) {
07200             MesPrint("&Switch should have a single $variable for its argument");
07201             return(1);
07202         }
07203         /*      AddPotModdollar(numdollar);      */
07204     }
07205     else {
07206         MesPrint("%s is not a $-variable in switch statement",s);
07207         return(1);
07208     }
07209     /*
07210     Now create the switch table. We will add to it each time we run
07211     into a new case. It will all be sorted out the moment we run into
07212     the endswitch statement.
07213     */
07214     AC.SwitchLevel++;
07215     if ( AC.SwitchInArray >= AC.MaxSwitch ) DoubleSwitchBuffers();
07216     AC.SwitchHeap[AC.SwitchLevel] = AC.SwitchInArray;
07217     sw = AC.SwitchArray + AC.SwitchInArray;
07218
07219     sw->iflevel = AC.IfLevel;
07220     sw->whilelevel = AC.WhileLevel;
07221     sw->nestingsum = NestingChecksum();
07222
07223     Add4Com(TYPESWITCH,numdollar,AC.SwitchInArray);
07224
07225     AC.SwitchInArray++;
07226     return(0);
07227 }
07228
07229 /*
07230 #] CoSwitch :
07231 #[ CoCase :
07232 */
07233
07234 int CoCase(UBYTE *s)
07235 {
07236     SWITCH *sw = AC.SwitchArray + AC.SwitchHeap[AC.SwitchLevel];
07237     WORD x = 0, sign = 1;
07238     while ( *s == ',' ) s++;
07239     SKIPBLANKS(s);
07240     while ( *s == '-' || *s == '+' ) {
07241         if ( *s == '-' ) sign = -sign;
07242         s++;
07243     }
07244     while ( FG.cTable[*s] == 1 ) { x = 10*x + *s++ - '0'; }
07245     x = sign*x;
07246
07247     if ( sw->iflevel != AC.IfLevel || sw->whilelevel != AC.WhileLevel
07248         || sw->nestingsum != NestingChecksum() ) {
07249         MesPrint("%Illegal nesting of switch/case/default with
07250 if/while/repeat/loop/argument/term/...");
07251         return(-1);
07252     }
07253     /*
07254     Now add a case to the table with the current 'address'.
07255     */
07256     if ( sw->numcases >= sw->tablesize ) {
07257         int i;
07258         SWITCHTABLE *newtable;
07259         WORD newsize;
07260         if ( sw->tablesize == 0 ) newsize = 10;
07261         else newsize = 2*sw->tablesize;
07262         newtable = (SWITCHTABLE *)Malloc1(newsize*sizeof(SWITCHTABLE),"Switch table");
07263         if ( sw->table ) {
07264             for ( i = 0; i < sw->tablesize; i++ ) newtable[i] = sw->table[i];
07265             M_free(sw->table,"Switch table");
07266         }
07267         sw->table = newtable;
07268         sw->tablesize = newsize;
07269     }
07270     if ( sw->numcases == 0 ) { sw->mincase = sw->maxcase = x; }
07271     else if ( x > sw->maxcase ) sw->maxcase = x;
07272     else if ( x < sw->mincase ) sw->mincase = x;
07273     sw->table[sw->numcases].ncase = x;
07274     sw->table[sw->numcases].value = cbuf[AC.cbufnum].numlhs;

```

```

07274     sw->table[sw->numcases].compbuffer = AC.cbufnum;
07275     sw->numcases++;
07276     return(0);
07277 }
07278
07279 /*
07280  #] CoCase :
07281  #[ CoBreak :
07282 */
07283
07284 int CoBreak(UBYTE *s)
07285 {
07286     /*
07287      This involves a 'postponed' jump to the end. This can be done
07288      in a special routine during execution.
07289      That routine should also pop the switch level.
07290     */
07291     SWITCH *sw = AC.SwitchArray + AC.SwitchHeap[AC.SwitchLevel];
07292     if ( sw->iflevel != AC.IfLevel || sw->whilelevel != AC.WhileLevel
07293         || sw->nestingsum != NestingChecksum() ) {
07294         MesPrint("&Illegal nesting of switch/case/default with
if/while/repeat/loop/argument/term/...");
07295         return(-1);
07296     }
07297     if ( *s ) {
07298         MesPrint("&No parameters allowed in Break statement");
07299         return(-1);
07300     }
07301     Add3Com(TYPEENDSWITCH,AC.SwitchHeap[AC.SwitchLevel]);
07302     return(0);
07303 }
07304
07305 /*
07306  #] CoBreak :
07307  #[ CoDefault :
07308 */
07309
07310 int CoDefault(UBYTE *s)
07311 {
07312     /*
07313      A bit like case, except that the address gets stored directly in the
07314      SWITCH struct.
07315     */
07316     SWITCH *sw = AC.SwitchArray + AC.SwitchHeap[AC.SwitchLevel];
07317     if ( sw->iflevel != AC.IfLevel || sw->whilelevel != AC.WhileLevel
07318         || sw->nestingsum != NestingChecksum() ) {
07319         MesPrint("&Illegal nesting of switch/case/default with
if/while/repeat/loop/argument/term/...");
07320         return(-1);
07321     }
07322     if ( *s ) {
07323         MesPrint("&No parameters allowed in Default statement");
07324         return(-1);
07325     }
07326     sw->defaultcase.ncase = 0;
07327     sw->defaultcase.value = cbuf[AC.cbufnum].numlhs;
07328     sw->defaultcase.compbuffer = AC.cbufnum;
07329     return(0);
07330 }
07331
07332 /*
07333  #] CoDefault :
07334  #[ CoEndSwitch :
07335 */
07336
07337 int CoEndSwitch(UBYTE *s)
07338 {
07339     /*
07340      We store this address in the SWITCH struct.
07341      Next we sort the table by ncase.
07342      Then we decide whether the table is DENSE or SPARSE.
07343      If it is dense we change the allocation and spread the cases is necessary.
07344      Finally we pop levels.
07345     */
07346     SWITCH *sw = AC.SwitchArray + AC.SwitchHeap[AC.SwitchLevel];
07347     WORD i;
07348     WORD totcases = sw->maxcase-sw->mincase+1;
07349     while ( *s == ',' ) s++;
07350     SKIPBLANKS(s)
07351     if ( *s ) {
07352         MesPrint("&No parameters allowed in EndSwitch statement");
07353         return(-1);
07354     }
07355     if ( sw->iflevel != AC.IfLevel || sw->whilelevel != AC.WhileLevel
07356         || sw->nestingsum != NestingChecksum() ) {
07357         MesPrint("&Illegal nesting of switch/case/default with
if/while/repeat/loop/argument/term/...");

```

```

07358     return(-1);
07359 }
07360 if ( sw->defaultcase.value == 0 ) CoDefault(s);
07361 if ( totcases > sw->numcases*AM.jumpratio ) { /* The factor is experimental */
07362     sw->caseoffset = 0;
07363     sw->typetable = SPARSETABLE;
07364 /*
07365     Now we need to sort sw->table
07366 */
07367     SwitchSplitMerge(sw->table,sw->numcases);
07368 }
07369 else { /* DENSE */
07370     SWITCHTABLE *ntable;
07371     sw->caseoffset = sw->mincase;
07372     sw->typetable = DENSETABLE;
07373     ntable = (SWITCHTABLE *)Malloc1(totcases*sizeof(SWITCHTABLE),"Switch table");
07374     for ( i = 0; i < totcases; i++ ) {
07375         ntable[i].ncase = i+sw->caseoffset;
07376         ntable[i].value = sw->defaultcase.value;
07377         ntable[i].compbuffer = sw->defaultcase.compbuffer;
07378     }
07379     for ( i = 0; i < sw->numcases; i++ ) {
07380         ntable[sw->table[i].ncase-sw->caseoffset] = sw->table[i];
07381     }
07382     M_free(sw->table,"Switch table");
07383     sw->table = ntable;
07384     sw->numcases = totcases;
07385 }
07386 sw->endswitch.ncase = 0;
07387 sw->endswitch.value = cbuf[AC.cbunum].numlhs;
07388 sw->endswitch.compbuffer = AC.cbunum;
07389 if ( sw->defaultcase.value == 0 ) {
07390     sw->defaultcase = sw->endswitch;
07391 }
07392 Add3Com(TYPEENDSWITCH,AC.SwitchHeap[AC.SwitchLevel]);
07393 /*
07394     Now we need to pop.
07395 */
07396 AC.SwitchLevel--;
07397 return(0);
07398 }
07399
07400 /*
07401     #] CoEndSwitch :
07402     #[ CoSetUserFlag :
07403 */
07404
07405 int CoSetUserFlag(UBYTE *s)
07406 {
07407     int error = 0;
07408     while ( *s && ( *s == ',' || *s == ' ' || *s == '\t' ) ) s++;
07409     while ( *s && ( FG.cTable[*s] == 1 ) ) {
07410         int x = 0;
07411         while ( *s && ( FG.cTable[*s] == 1 ) ) x = 10*x+(s++ - '0');
07412         if ( x < 1 || x > BITSINWORD ) {
07413             MesPrint("&Flag number %d outside the permitted range 1-%d.",BITSINWORD);
07414             error = 1;
07415         }
07416         else {
07417             Add3Com(TYPESETUSERFLAG,x-1);
07418         }
07419         while ( *s && ( *s == ',' || *s == ' ' || *s == '\t' ) ) s++;
07420     }
07421     if ( *s ) {
07422         MesPrint("&Illegal character in SetUserFlag statement: %s",s);
07423         error = 1;
07424     }
07425     return(error);
07426 }
07427
07428 /*
07429     #] CoSetUserFlag :
07430     #[ CoClearUserFlag :
07431 */
07432
07433 int CoClearUserFlag(UBYTE *s)
07434 {
07435     int error = 0;
07436     while ( *s && ( *s == ',' || *s == ' ' || *s == '\t' ) ) s++;
07437     while ( *s && ( FG.cTable[*s] == 1 ) ) {
07438         int x = 0;
07439         while ( *s && ( FG.cTable[*s] == 1 ) ) x = 10*x+(s++ - '0');
07440         if ( x < 1 || x > BITSINWORD ) {
07441             MesPrint("&Flag number %d outside the permitted range 1-%d.",BITSINWORD);
07442             error = 1;
07443         }
07444         else {

```



```

07445         Add3Com(TYPECLEARUSERFLAG,x);
07446     }
07447     while ( *s && ( *s == ',' || *s == ' ' || *s == '\t' ) ) s++;
07448 }
07449 if ( *s ) {
07450     MesPrint("&Illegal character in SetUserFlag statement: %s",s);
07451     error = 1;
07452 }
07453 return(error);
07454 }
07455
07456 /*
07457 #] CoClearUserFlag :
07458 #[ CoCreateAllLoops :
07459
07460 Syntax:
07461     CoCreateAllLoops,in-function,out-function,type-argument,ifnolooop;
07462 Types allowed:
07463     vector, index, symbol, snumber
07464 ifnolooop:
07465     ifnolooop=0 or ifnolooop=1
07466 in-function can be a tensor. In that case type can be only vector or index.
07467 out-function can be a tensor. In that case type can be only vector or index.
07468 */
07469
07470 int CoCreateAllLoops(UBYTE *s)
07471 {
07472     GETIDENTITY
07473     UBYTE *iname, *outname, *stype, c;
07474     WORD infun, outfun, x, type, tensorflag, typenum;
07475     WORD *WorkSave, *to;
07476     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07477     iname = s; s = SkipAName(s);
07478     c = *s; *s = 0;
07479     if ( ( ( type = GetName(AC.varnames,inname,&infun,WITHAUTO) ) != CFUNCTION )
07480 || ( ( functions[infun].spec != 0 ) && ( functions[infun].spec != TENSORFUNCTION ) ) ) ) {
07481         MesPrint("&%s should be a regular function or a tensor.",iname);
07482         if ( type < 0 ) {
07483             if ( GetName(AC.exprnames,s,&infun,NOAUTO) == NAMENOTFOUND )
07484                 AddFunction(s,0,0,0,0,0,-1,-1);
07485         }
07486         return(1);
07487     }
07488     infun += FUNCTION;
07489     *s++ = c;
07490     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07491     outname = s; s = SkipAName(s);
07492     c = *s; *s = 0;
07493     if ( ( ( type = GetName(AC.varnames,outname,&outfun,WITHAUTO) ) != CFUNCTION )
07494 || ( ( functions[outfun].spec != 0 ) && ( functions[outfun].spec != TENSORFUNCTION ) ) ) ) {
07495         MesPrint("&%s should be a regular function or a tensor.",outname);
07496         if ( type < 0 ) {
07497             if ( GetName(AC.exprnames,s,&outfun,NOAUTO) == NAMENOTFOUND )
07498                 AddFunction(s,0,0,0,0,0,-1,-1);
07499         }
07500         return(1);
07501     }
07502     outfun += FUNCTION;
07503     *s++ = c;
07504     if ( functions[infun].spec == TENSORFUNCTION ||
07505         functions[outfun].spec == TENSORFUNCTION ) tensorflag = 1;
07506     else tensorflag = 0;
07507 /*
07508 Now the type: type=...
07509 */
07510     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07511     stype = s;
07512     while ( FG.cTable[*s] == 0 ) s++;
07513     c = *s; *s = 0;
07514     if ( StrICmp(stype,(UBYTE *)"type") != 0 || c != '=' ) {
07515         MesPrint("&In CreateAllLoops statement: expected type=vartype.");
07516         return(1);
07517     }
07518     *s++ = c;
07519     stype = s;
07520     while ( FG.cTable[*s] == 0 ) s++;
07521     c = *s; *s = 0;
07522     if ( StrICmp(stype,(UBYTE *)"vector") == 0 ) {
07523         typenum = -VECTOR;
07524     }
07525     else if ( StrICmp(stype,(UBYTE *)"index") == 0 ) {
07526         typenum = -INDEX;
07527     }
07528     else if ( StrICmp(stype,(UBYTE *)"symbol") == 0 ) {
07529         if ( tensorflag ) goto notintensor;
07530         typenum = -SYMBOL;
07531     }

```

```

07532     else if ( StrICmp(stype,(UBYTE *)"snumber") == 0 ) {
07533         if ( tensorflag ) goto notintensor;
07534         typenum = -SNUMBER;
07535     }
07536     else {
07537         MesPrint("&Unknown/not allowed variable type in CreateAllLoops: %s",stype);
07538         return(1);
07539     }
07540     *s = c;
07541     while ( *s == ',' || *s == ' ' ) s++;
07542
07543     stype = s;
07544     while ( FG.cTable[*s] == 0 ) s++;
07545     c = *s; *s = 0;
07546     if ( StrICmp(stype,(UBYTE *)"ifnolooop") != 0 || c != '=' ) {
07547         MesPrint("&Unrecognised option in CreateAllLoops statement: %s",stype);
07548         return(1);
07549     }
07550     *s++ = c;
07551     x = -1;
07552     if ( FG.cTable[*s] == 1 ) {
07553         x = 0;
07554         do { x = 10*x + (*s++-'0'); } while (FG.cTable[*s] == 1);
07555     }
07556     if ( x != 0 && x != 1 ) {
07557         MesPrint("&Only options allowed for ifnolooop are 0 or 1.");
07558         return(1);
07559     }
07560     WorkSave = to = AT.WorkPointer;
07561     *to++ = TYPEALLLOOPS;
07562     *to++ = 6;
07563     *to++ = infun;
07564     *to++ = outfun;
07565     *to++ = typenum;
07566     *to++ = x;
07567
07568     AddNtoL(WorkSave[1],WorkSave);
07569
07570     return(0);
07571 notintensor:
07572     MesPrint("&Variable type not allowed in tensors: %s",stype);
07573     return(1);
07574 }
07575
07576 /*
07577 #] CoCreateAllLoops :
07578 #[ CoCreateAllPaths :
07579
07580 Syntax:
07581     CreateAllPaths,end-function,intermediate-function,out-function,type-argument,ifnopath;
07582 Types allowed:
07583     vector, index, symbol, snumber
07584 ifnolooop:
07585     ifnolooop=0 or ifnolooop=1
07586 in-function can be a tensor. In that case type can be only vector or index.
07587 out-function can be a tensor. In that case type can be only vector or index.
07588 */
07589
07590 int CoCreateAllPaths(UBYTE *s)
07591 {
07592     GETIDENTITY
07593     UBYTE *endname,*iname,*outname,*stype,c;
07594     WORD endfun, infun, outfun, x, type, tensorflag, typenum;
07595     WORD *WorkSave,*to;
07596     while ( *s == ',' || *s == ' ' ) s++;
07597     endname = s; s = SkipAName(s);
07598     c = *s; *s = 0;
07599     if ( ( ( type = GetName(AC.varnames,endname,&endfun,WITHAUTO) ) != CFUNCTION )
07600 || ( ( functions[endfun].spec != 0 ) && ( functions[endfun].spec != TENSORFUNCTION ) ) ) {
07601         MesPrint("&%s should be a regular function or a tensor.",endname);
07602         if ( type < 0 ) {
07603             if ( GetName(AC.exprnames,s,&endfun,NOAUTO) == NAMENOTFOUND )
07604                 AddFunction(s,0,0,0,0,0,-1,-1);
07605         }
07606         return(1);
07607     }
07608     endfun += FUNCTION;
07609     *s++ = c;
07610     while ( *s == ',' || *s == ' ' ) s++;
07611     iname = s; s = SkipAName(s);
07612     c = *s; *s = 0;
07613     if ( ( ( type = GetName(AC.varnames,iname,&infun,WITHAUTO) ) != CFUNCTION )
07614 || ( ( functions[infun].spec != 0 ) && ( functions[infun].spec != TENSORFUNCTION ) ) ) {
07615         MesPrint("&%s should be a regular function or a tensor.",iname);
07616         if ( type < 0 ) {
07617             if ( GetName(AC.exprnames,s,&infun,NOAUTO) == NAMENOTFOUND )
07618                 AddFunction(s,0,0,0,0,0,-1,-1);

```

```

07619     }
07620     return(1);
07621 }
07622 infun += FUNCTION;
07623 *s++ = c;
07624 while ( *s == ',' || *s == ' ' ) s++;
07625 outname = s; s = SkipAName(s);
07626 c = *s; *s = 0;
07627 if ( ( type = GetName(AC.varnames,outname,&outfun,WITHAUTO) ) != CFUNCTION )
07628 || ( ( functions[outfun].spec != 0 ) && ( functions[outfun].spec != TENSORFUNCTION ) ) ) {
07629     MesPrint("%s should be a regular function or a tensor.",outname);
07630     if ( type < 0 ) {
07631         if ( GetName(AC.exprnames,s,&outfun,NOAUTO) == NAMENOTFOUND )
07632             AddFunction(s,0,0,0,0,0,-1,-1);
07633     }
07634     return(1);
07635 }
07636 outfun += FUNCTION;
07637 *s++ = c;
07638 if ( functions[infun].spec == TENSORFUNCTION ||
07639     functions[outfun].spec == TENSORFUNCTION ) tensorflag = 1;
07640 else tensorflag = 0;
07641 /*
07642 Now the type: type=....
07643 */
07644 while ( *s == ',' || *s == ' ' ) s++;
07645 stype = s;
07646 while ( FG.cTable[*s] == 0 ) s++;
07647 c = *s; *s = 0;
07648 if ( StrICmp(stype,(UBYTE *)"type") != 0 || c != '=' ) {
07649     MesPrint("&In CreateAllPaths statement: expected type=vartype.");
07650     return(1);
07651 }
07652 *s++ = c;
07653 stype = s;
07654 while ( FG.cTable[*s] == 0 ) s++;
07655 c = *s; *s = 0;
07656 if ( StrICmp(stype,(UBYTE *)"vector") == 0 ) {
07657     typenum = -VECTOR;
07658 }
07659 else if ( StrICmp(stype,(UBYTE *)"index") == 0 ) {
07660     typenum = -INDEX;
07661 }
07662 else if ( StrICmp(stype,(UBYTE *)"symbol") == 0 ) {
07663     if ( tensorflag ) goto notintensor;
07664     typenum = -SYMBOL;
07665 }
07666 else if ( StrICmp(stype,(UBYTE *)"snumber") == 0 ) {
07667     if ( tensorflag ) goto notintensor;
07668     typenum = -SNUMBER;
07669 }
07670 else {
07671     MesPrint("%&Unknown/not allowed variable type in CreateAllPaths: %s",stype);
07672     return(1);
07673 }
07674 *s = c;
07675 while ( *s == ',' || *s == ' ' ) s++;
07676
07677 stype = s;
07678 while ( FG.cTable[*s] == 0 ) s++;
07679 c = *s; *s = 0;
07680 if ( StrICmp(stype,(UBYTE *)"ifnopath") != 0 || c != '=' ) {
07681     MesPrint("%&Unrecognised option in CreateAllPaths statement: %s",stype);
07682     return(1);
07683 }
07684 *s++ = c;
07685 x = -1;
07686 if ( FG.cTable[*s] == 1 ) {
07687     x = 0;
07688     do { x = 10*x + (*s++-'0'); } while (FG.cTable[*s] == 1);
07689 }
07690 if ( x != 0 && x != 1 ) {
07691     MesPrint("%&Only options allowed for ifnopath are 0 or 1.");
07692     return(1);
07693 }
07694 WorkSave = to = AT.WorkPointer;
07695 *to++ = TYPEALLPATHS;
07696 *to++ = 7;
07697 *to++ = endfun;
07698 *to++ = infun;
07699 *to++ = outfun;
07700 *to++ = typenum;
07701 *to++ = x;
07702
07703 AddNtoL(WorkSave[1],WorkSave);
07704
07705 return(0);

```

```


07706 notintensor:
07707     MesPrint("&CreateAllPaths: Variable type not allowed in tensors: %s",stype);
07708     return(1);
07709 }
07710
07711 /*
07712 #] CoCreateAllPaths :
07713 #[ CoCreateAll :
07714
07715 Syntax: subkey, two or three functions, type, ifnone
07716 */
07717
07718 int CoCreateAll(UBYTE *s)
07719 {
07720     UBYTE *subkey;
07721     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
07722     subkey = s;
07723     while ( FG.cTable[*s] == 0 ) s++;
07724     if ( *s != ' ' && *s != ',' && *s != '\t' ) {
07725         MesPrint("&Illegal subkey in CoCreate statement.");
07726         return(1);
07727     }
07728     /* c = *s; */ *s++ = 0;
07729     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
07730     if ( StrICmp(subkey,(UBYTE *) "loops") == 0 ) {
07731         return(CoCreateAllLoops(s));
07732     }
07733     else if ( StrICmp(subkey,(UBYTE *) "paths") == 0 ) {
07734         return(CoCreateAllPaths(s));
07735     }
07736     /*
07737     else if ( StrICmp(subkey,(UBYTE *) "motics") == 0 ) {
07738     }
07739     else if ( StrICmp(subkey,(UBYTE *) "onepi") == 0 ) {
07740     }
07741     else if ( StrICmp(subkey,(UBYTE *) "cuts") == 0 ) {
07742     }
07743     */
07744     else {
07745         MesPrint("&Illegal subkey in CoCreate statement: %s.",subkey);
07746         return(1);
07747     }
07748 }
07749
07750 /*
07751 #] CoCreateAll :
07752 */

```

4.11 compiler.c File Reference

#include "form3.h"

Include dependency graph for compiler.c:

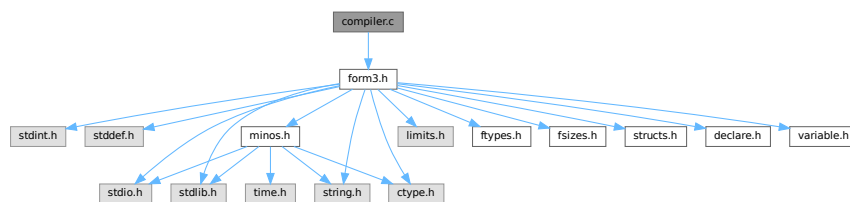

Data Structures

- struct [SuBbUf](#)

Macros

- `#define` [OPTION0](#) 1
- `#define` [OPTION1](#) 2
- `#define` [OPTION2](#) 3
- `#define` [REDUCESUBEXPBUFFERS](#)

Typedefs

- `typedef struct` [SuBbUf](#) **SUBBUF**

Functions

- `void` [inictable](#) (void)
- `KEYWORD *` [findcommand](#) (UBYTE *in)
- `int` [ParenthesesTest](#) (UBYTE *sin)
- `UBYTE *` [SkipAName](#) (UBYTE *s)
- `UBYTE *` [IsRHS](#) (UBYTE *s, UBYTE c)
- `int` [IsIdStatement](#) (UBYTE *s)
- `int` [CompileAlgebra](#) (UBYTE *s, int leftright, WORD *prototype)
- `int` [CompileStatement](#) (UBYTE *in)
- `int` [TestTables](#) (void)
- `int` [CompileSubExpressions](#) (SBYTE *tokens)
- `int` [CodeGenerator](#) (SBYTE *tokens)
- `int` [CompleteTerm](#) (WORD *term, UWORD *numer, UWORD *denom, WORD nnum, WORD nden, int sign)
- `int` [CodeFactors](#) (SBYTE *tokens)
- `WORD` [GenerateFactors](#) (WORD n, WORD inc)

Variables

- `int` [alfatable1](#) [27]
- `SUBBUF *` [subexpbuffers](#) = 0
- `SUBBUF *` [topsubexpbuffers](#) = 0
- `LONG` [insubexpbuffers](#) = 0

4.11.1 Detailed Description

The heart of the compiler. It contains the tables of statements. It finds the statements in the tables and calls the proper routines. For algebraic expressions it runs the compilation by first calling the tokenizer, splitting things into subexpressions and generating the code. There is a system for recognizing already existing subexpressions. This economizes on the length of the output.

Note: the compiler of FORM doesn't attempt to normalize the input. Hence $x+1$ and $1+x$ are different objects during compilation. Similarly $(a+b-b)$ will not be simplified to (a) .

Definition in file [compiler.c](#).

4.11.2 Macro Definition Documentation

4.11.2.1 OPTION0

```
#define OPTION0 1
```

Definition at line 259 of file [compiler.c](#).

4.11.2.2 OPTION1

```
#define OPTION1 2
```

Definition at line 260 of file [compiler.c](#).

4.11.2.3 OPTION2

```
#define OPTION2 3
```

Definition at line 261 of file [compiler.c](#).

4.11.2.4 REDUCESUBEXPBUFFERS

```
#define REDUCESUBEXPBUFFERS
```

Value:

```
{ if ( (topsubexpbuffers-subexpbuffers) > 256 ) {\
  M_free(subexpbuffers,"subexpbuffers");\
  subexpbuffers = (SUBBUF *)Malloc1(256*sizeof(SUBBUF),"subexpbuffers");\
  topsubexpbuffers = subexpbuffers+256; } insubexpbuffers = 0; }
```

Definition at line 272 of file [compiler.c](#).

4.11.3 Function Documentation

4.11.3.1 inictable()

```
void inictable (
    void )
```

Definition at line 314 of file [compiler.c](#).

4.11.3.2 findcommand()

```
KEYWORD * findcommand (
    UBYTE * in )
```

Definition at line 340 of file [compiler.c](#).

4.11.3.3 ParenthesesTest()

```
int ParenthesesTest (
    UBYTE * sin )
```

Definition at line 384 of file [compiler.c](#).

4.11.3.4 SkipAName()

```
UBYTE * SkipAName (
    UBYTE * s )
```

Definition at line 434 of file [compiler.c](#).

4.11.3.5 IsRHS()

```
UBYTE * IsRHS (
    UBYTE * s,
    UBYTE c )
```

Definition at line 462 of file [compiler.c](#).

4.11.3.6 IsIdStatement()

```
int IsIdStatement (
    UBYTE * s )
```

Definition at line 508 of file [compiler.c](#).

4.11.3.7 CompileAlgebra()

```
int CompileAlgebra (
    UBYTE * s,
    int leftright,
    WORD * prototype )
```

Definition at line 522 of file [compiler.c](#).

4.11.3.8 CompileStatement()

```
int CompileStatement (
    UBYTE * in )
```

Definition at line 558 of file [compiler.c](#).

4.11.3.9 TestTables()

```
int TestTables (
    void )
```

Definition at line [673](#) of file [compiler.c](#).

4.11.3.10 CompileSubExpressions()

```
int CompileSubExpressions (
    SBYTE * tokens )
```

Definition at line [717](#) of file [compiler.c](#).

4.11.3.11 CodeGenerator()

```
int CodeGenerator (
    SBYTE * tokens )
```

Definition at line [852](#) of file [compiler.c](#).

4.11.3.12 CompleteTerm()

```
int CompleteTerm (
    WORD * term,
    UWORD * numer,
    UWORD * denom,
    WORD nnum,
    WORD nden,
    int sign )
```

Definition at line [1915](#) of file [compiler.c](#).

4.11.3.13 CodeFactors()

```
int CodeFactors (
    SBYTE * tokens )
```

Definition at line [1952](#) of file [compiler.c](#).

4.11.3.14 GenerateFactors()

```
WORD GenerateFactors (
    WORD n,
    WORD inc )
```

Definition at line [2249](#) of file [compiler.c](#).

4.11.4 Variable Documentation

4.11.4.1 alfatable1

```
int alfatable1[27]
```

Definition at line 257 of file [compiler.c](#).

4.11.4.2 subexpbuffers

```
SUBBUF* subexpbuffers = 0
```

Definition at line 268 of file [compiler.c](#).

4.11.4.3 topsubexpbuffers

```
SUBBUF* topsubexpbuffers = 0
```

Definition at line 269 of file [compiler.c](#).

4.11.4.4 insubexpbuffers

```
LONG insubexpbuffers = 0
```

Definition at line 270 of file [compiler.c](#).

4.12 compiler.c

[Go to the documentation of this file.](#)

```
00001
00015 /* #[] License : */
00016 /*
00017 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00018 * When using this file you are requested to refer to the publication
00019 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00020 * This is considered a matter of courtesy as the development was paid
00021 * for by FOM the Dutch physics granting agency and we would like to
00022 * be able to track its scientific use to convince FOM of its value
00023 * for the community.
00024 *
00025 * This file is part of FORM.
00026 *
00027 * FORM is free software: you can redistribute it and/or modify it under the
00028 * terms of the GNU General Public License as published by the Free Software
00029 * Foundation, either version 3 of the License, or (at your option) any later
00030 * version.
00031 *
00032 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00033 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00034 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00035 * details.
00036 *
00037 * You should have received a copy of the GNU General Public License along
00038 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00039 */
00040 /* #[] License : */
00041 /*
00042 * #[] includes :
00043 */
00044
```

```

00045 #include "form3.h"
00046
00047 /*
00048     com1commands are the commands of which only part of the word has to
00049     be present. The order is rather important here.
00050     com2commands are the commands that must have their whole word match.
00051     here we can do a binary search.
00052     {{{
00053 */
00054
00055 static KEYWORD com1commands[] = {
00056     {"also", (TFUN) CoIdOld, STATEMENT, PARTEST}
00057     , {"abracquets", (TFUN) CoAntiBracket, TOOUTPUT, PARTEST}
00058     , {"antisymmetrize", (TFUN) CoAntiSymmetrize, STATEMENT, PARTEST}
00059     , {"antibrackets", (TFUN) CoAntiBracket, TOOUTPUT, PARTEST}
00060     , {"brackets", (TFUN) CoBracket, TOOUTPUT, PARTEST}
00061     , {"cfunctions", (TFUN) CoCFunction, DECLARATION, PARTEST|WITHAUTO}
00062     , {"commuting", (TFUN) CoCFunction, DECLARATION, PARTEST|WITHAUTO}
00063     , {"compress", (TFUN) CoCompress, DECLARATION, PARTEST}
00064     , {"ctensors", (TFUN) CoCTensor, DECLARATION, PARTEST|WITHAUTO}
00065     , {"cyclesymmetrize", (TFUN) CoCycleSymmetrize, STATEMENT, PARTEST}
00066     , {"dimension", (TFUN) CoDimension, DECLARATION, PARTEST}
00067     , {"discard", (TFUN) CoDiscard, STATEMENT, PARTEST}
00068     , {"functions", (TFUN) CoNFunction, DECLARATION, PARTEST|WITHAUTO}
00069     , {"format", (TFUN) CoFormat, TOOUTPUT, PARTEST}
00070     , {"fixindex", (TFUN) CoFixIndex, DECLARATION, PARTEST}
00071     , {"global", (TFUN) CoGlobal, DEFINITION, PARTEST}
00072     , {"gfactorized", (TFUN) CoGlobalFactorized, DEFINITION, PARTEST}
00073     , {"globalfactorized", (TFUN) CoGlobalFactorized, DEFINITION, PARTEST}
00074     , {"goto", (TFUN) CoGoTo, STATEMENT, PARTEST}
00075     , {"indexes", (TFUN) CoIndex, DECLARATION, PARTEST|WITHAUTO}
00076     , {"indices", (TFUN) CoIndex, DECLARATION, PARTEST|WITHAUTO}
00077     , {"identify", (TFUN) CoId, STATEMENT, PARTEST}
00078     , {"idnew", (TFUN) CoIdNew, STATEMENT, PARTEST}
00079     , {"idold", (TFUN) CoIdOld, STATEMENT, PARTEST}
00080     , {"local", (TFUN) CoLocal, DEFINITION, PARTEST}
00081     , {"lfactorized", (TFUN) CoLocalFactorized, DEFINITION, PARTEST}
00082     , {"localfactorized", (TFUN) CoLocalFactorized, DEFINITION, PARTEST}
00083     , {"load", (TFUN) CoLoad, DECLARATION, PARTEST}
00084     , {"label", (TFUN) CoLabel, STATEMENT, PARTEST}
00085     , {"modulus", (TFUN) CoModulus, DECLARATION, PARTEST}
00086     , {"multiply", (TFUN) CoMultiply, STATEMENT, PARTEST}
00087     , {"nfunctions", (TFUN) CoNFunction, DECLARATION, PARTEST|WITHAUTO}
00088     , {"nprint", (TFUN) CoNPrint, TOOUTPUT, PARTEST}
00089     , {"ntensors", (TFUN) CoNTensor, DECLARATION, PARTEST|WITHAUTO}
00090     , {"nwrite", (TFUN) CoNWrite, DECLARATION, PARTEST}
00091     , {"print", (TFUN) CoPrint, MIXED, 0}
00092     , {"redefine", (TFUN) CoRedefine, STATEMENT, 0}
00093     , {"rcyclesymmetrize", (TFUN) CoRCycleSymmetrize, STATEMENT, PARTEST}
00094     , {"symbols", (TFUN) CoSymbol, DECLARATION, PARTEST|WITHAUTO}
00095     , {"save", (TFUN) CoSave, DECLARATION, PARTEST}
00096     , {"symmetrize", (TFUN) CoSymmetrize, STATEMENT, PARTEST}
00097     , {"tensors", (TFUN) CoCTensor, DECLARATION, PARTEST|WITHAUTO}
00098     , {"unittrace", (TFUN) CoUnitTrace, DECLARATION, PARTEST}
00099     , {"vectors", (TFUN) CoVector, DECLARATION, PARTEST|WITHAUTO}
00100     , {"write", (TFUN) CoWrite, DECLARATION, PARTEST}
00101 };
00102
00103 static KEYWORD com2commands[] = {
00104     {"antiputinside", (TFUN) CoAntiPutInside, STATEMENT, PARTEST}
00105     , {"apply", (TFUN) CoApply, STATEMENT, PARTEST}
00106     , {"aputinside", (TFUN) CoAntiPutInside, STATEMENT, PARTEST}
00107     , {"argexplode", (TFUN) CoArgExplode, STATEMENT, PARTEST}
00108     , {"argimplode", (TFUN) CoArgImplode, STATEMENT, PARTEST}
00109     , {"argtoextrasymbol", (TFUN) CoArgToExtraSymbol, STATEMENT, PARTEST}
00110     , {"argument", (TFUN) CoArgument, STATEMENT, PARTEST}
00111     , {"assign", (TFUN) CoAssign, STATEMENT, PARTEST}
00112     , {"auto", (TFUN) CoAuto, DECLARATION, PARTEST}
00113     , {"autodeclare", (TFUN) CoAuto, DECLARATION, PARTEST}
00114     , {"break", (TFUN) CoBreak, STATEMENT, PARTEST}
00115     , {"canonicalize", (TFUN) CoCanonicalize, STATEMENT, PARTEST}
00116     , {"case", (TFUN) CoCase, STATEMENT, PARTEST}
00117     , {"chainin", (TFUN) CoChainin, STATEMENT, PARTEST}
00118     , {"chainout", (TFUN) CoChainout, STATEMENT, PARTEST}
00119     , {"chisholm", (TFUN) CoChisholm, STATEMENT, PARTEST}
00120 #ifdef WITHFLOAT
00121     , {"chop", (TFUN) CoChop, STATEMENT, PARTEST}
00122 #endif
00123     , {"clearflag", (TFUN) CoClearUserFlag, STATEMENT, PARTEST}
00124     , {"cleartable", (TFUN) CoClearTable, DECLARATION, PARTEST}
00125     , {"collect", (TFUN) CoCollect, SPECIFICATION, PARTEST}
00126     , {"commuteinset", (TFUN) CoCommuteInSet, DECLARATION, PARTEST}
00127     , {"contract", (TFUN) CoContract, STATEMENT, PARTEST}
00128     , {"copyspectator", (TFUN) CoCopySpectator, DEFINITION, PARTEST}
00129     , {"createall", (TFUN) CoCreateAll, STATEMENT, PARTEST}
00130     , {"createspectator", (TFUN) CoCreateSpectator, DECLARATION, PARTEST}
00131     , {"ctable", (TFUN) CoCTable, DECLARATION, PARTEST}

```

```

00132 ,{"deallocatetable", (TFUN) CoDeallocateTable, DECLARATION, PARTEST}
00133 ,{"default", (TFUN) CoDefault, STATEMENT, PARTEST}
00134 ,{"delete", (TFUN) CoDelete, SPECIFICATION, PARTEST}
00135 ,{"denominators", (TFUN) CoDenominators, STATEMENT, PARTEST}
00136 ,{"disorder", (TFUN) CoDisorder, STATEMENT, PARTEST}
00137 ,{"do", (TFUN) CoDo, STATEMENT, PARTEST}
00138 ,{"drop", (TFUN) CoDrop, SPECIFICATION, PARTEST}
00139 ,{"dropcoefficient", (TFUN) CoDropCoefficient, STATEMENT, PARTEST}
00140 ,{"dropsymbols", (TFUN) CoDropSymbols, STATEMENT, PARTEST}
00141 ,{"else", (TFUN) CoElse, STATEMENT, PARTEST}
00142 ,{"elseif", (TFUN) CoElseIf, STATEMENT, PARTEST}
00143 ,{"emptyspectator", (TFUN) CoEmptySpectator, SPECIFICATION, PARTEST}
00144 ,{"endargument", (TFUN) CoEndArgument, STATEMENT, PARTEST}
00145 ,{"enddo", (TFUN) CoEndDo, STATEMENT, PARTEST}
00146 ,{"endif", (TFUN) CoEndIf, STATEMENT, PARTEST}
00147 ,{"endinexpression", (TFUN) CoEndInExpression, STATEMENT, PARTEST}
00148 ,{"endinside", (TFUN) CoEndInside, STATEMENT, PARTEST}
00149 ,{"endmodel", (TFUN) CoEndModel, DECLARATION, PARTEST}
00150 ,{"endrepeat", (TFUN) CoEndRepeat, STATEMENT, PARTEST}
00151 ,{"endswitch", (TFUN) CoEndSwitch, STATEMENT, PARTEST}
00152 ,{"endterm", (TFUN) CoEndTerm, STATEMENT, PARTEST}
00153 ,{"endwhile", (TFUN) CoEndWhile, STATEMENT, PARTEST}
00154 #ifdef WITHFLOAT
00155 ,{"evaluate", (TFUN) CoEvaluate, STATEMENT, PARTEST}
00156 #endif
00157 ,{"exit", (TFUN) CoExit, STATEMENT, PARTEST}
00158 ,{"extrasymbols", (TFUN) CoExtraSymbols, DECLARATION, PARTEST}
00159 ,{"factarg", (TFUN) CoFactArg, STATEMENT, PARTEST}
00160 ,{"factdollar", (TFUN) CoFactDollar, STATEMENT, PARTEST}
00161 ,{"factorize", (TFUN) CoFactorize, TOOUTPUT, PARTEST}
00162 ,{"fill", (TFUN) CoFill, DECLARATION, PARTEST}
00163 ,{"fillexpression", (TFUN) CoFillExpression, DECLARATION, PARTEST}
00164 ,{"frompolynomial", (TFUN) CoFromPolynomial, STATEMENT, PARTEST}
00165 ,{"funpowers", (TFUN) CoFunPowers, DECLARATION, PARTEST}
00166 ,{"hide", (TFUN) CoHide, SPECIFICATION, PARTEST}
00167 ,{"if", (TFUN) CoIf, STATEMENT, PARTEST}
00168 ,{"ifmatch", (TFUN) CoIfMatch, STATEMENT, PARTEST}
00169 ,{"ifnomatch", (TFUN) CoIfNoMatch, STATEMENT, PARTEST}
00170 ,{"ifnotmatch", (TFUN) CoIfNoMatch, STATEMENT, PARTEST}
00171 ,{"inexpression", (TFUN) CoInExpression, STATEMENT, PARTEST}
00172 ,{"inparallel", (TFUN) CoInParallel, SPECIFICATION, PARTEST}
00173 ,{"inside", (TFUN) CoInside, STATEMENT, PARTEST}
00174 ,{"insidefirst", (TFUN) CoInsideFirst, DECLARATION, PARTEST}
00175 ,{"intohide", (TFUN) CoIntoHide, SPECIFICATION, PARTEST}
00176 ,{"keep", (TFUN) CoKeep, SPECIFICATION, PARTEST}
00177 ,{"makeinteger", (TFUN) CoMakeInteger, STATEMENT, PARTEST}
00178 ,{"many", (TFUN) CoMany, STATEMENT, PARTEST}
00179 ,{"merge", (TFUN) CoMerge, STATEMENT, PARTEST}
00180 ,{"metric", (TFUN) CoMetric, DECLARATION, PARTEST}
00181 ,{"model", (TFUN) CoModel, DECLARATION, PARTEST}
00182 ,{"moduleoption", (TFUN) CoModuleOption, ATENDOFMODULE, PARTEST}
00183 ,{"multi", (TFUN) CoMulti, STATEMENT, PARTEST}
00184 ,{"multibracket", (TFUN) CoMultiBracket, STATEMENT, PARTEST}
00185 ,{"ndrop", (TFUN) CoNoDrop, SPECIFICATION, PARTEST}
00186 ,{"nfactorize", (TFUN) CoNFactorize, TOOUTPUT, PARTEST}
00187 ,{"nhide", (TFUN) CoNoHide, SPECIFICATION, PARTEST}
00188 ,{"nintohide", (TFUN) CoNoIntoHide, SPECIFICATION, PARTEST}
00189 ,{"normalize", (TFUN) CoNormalize, STATEMENT, PARTEST}
00190 ,{"notinparallel", (TFUN) CoNotInParallel, SPECIFICATION, PARTEST}
00191 ,{"nskip", (TFUN) CoNoSkip, SPECIFICATION, PARTEST}
00192 ,{"ntable", (TFUN) CoNTable, DECLARATION, PARTEST}
00193 ,{"nunfactorize", (TFUN) CoUnFactorize, TOOUTPUT, PARTEST}
00194 ,{"nunhide", (TFUN) CoNoUnHide, SPECIFICATION, PARTEST}
00195 ,{"off", (TFUN) CoOff, DECLARATION, PARTEST}
00196 ,{"on", (TFUN) CoOn, DECLARATION, PARTEST}
00197 ,{"once", (TFUN) CoOnce, STATEMENT, PARTEST}
00198 ,{"only", (TFUN) CoOnly, STATEMENT, PARTEST}
00199 ,{"particle", (TFUN) CoParticle, DECLARATION, PARTEST}
00200 ,{"polyfun", (TFUN) CoPolyFun, DECLARATION, PARTEST}
00201 ,{"polyratfun", (TFUN) CoPolyRatFun, DECLARATION, PARTEST}
00202 ,{"pophide", (TFUN) CoPopHide, SPECIFICATION, PARTEST}
00203 ,{"print[]", (TFUN) CoPrintB, TOOUTPUT, PARTEST}
00204 ,{"printtable", (TFUN) CoPrintTable, MIXED, PARTEST}
00205 ,{"processbucketsize", (TFUN) CoProcessBucket, DECLARATION, PARTEST}
00206 ,{"propercount", (TFUN) CoProperCount, DECLARATION, PARTEST}
00207 ,{"pushhide", (TFUN) CoPushHide, SPECIFICATION, PARTEST}
00208 ,{"putinside", (TFUN) CoPutInside, STATEMENT, PARTEST}
00209 ,{"ratio", (TFUN) CoRatio, STATEMENT, PARTEST}
00210 ,{"removespectator", (TFUN) CoRemoveSpectator, SPECIFICATION, PARTEST}
00211 ,{"renumber", (TFUN) CoReNumber, STATEMENT, PARTEST}
00212 ,{"repeat", (TFUN) CoRepeat, STATEMENT, PARTEST}
00213 ,{"replaceloop", (TFUN) CoReplaceLoop, STATEMENT, PARTEST}
00214 ,{"select", (TFUN) CoSelect, STATEMENT, PARTEST}
00215 ,{"set", (TFUN) CoSet, DECLARATION, PARTEST}
00216 ,{"setexitflag", (TFUN) CoSetExitFlag, STATEMENT, PARTEST}
00217 ,{"setflag", (TFUN) CoSetUserFlag, STATEMENT, PARTEST}
00218 ,{"shuffle", (TFUN) CoMerge, STATEMENT, PARTEST}

```

```

00219     ,{"skip",                (TFUN) CoSkip,                SPECIFICATION, PARTEST}
00220     ,{"sort",                (TFUN) CoSort,                STATEMENT,    PARTEST}
00221     ,{"splitarg",            (TFUN) CoSplitArg,            STATEMENT,    PARTEST}
00222     ,{"splitfirstarg",       (TFUN) CoSplitFirstArg,    STATEMENT,    PARTEST}
00223     ,{"splitlastarg",        (TFUN) CoSplitLastArg,    STATEMENT,    PARTEST}
00224 #ifdef WITHFLOAT
00225     ,{"strictrounding",      (TFUN) CoStrictRounding,  STATEMENT,    PARTEST}
00226 #endif
00227     ,{"shuffle",              (TFUN) CoShuffle,         STATEMENT,    PARTEST}
00228     ,{"sum",                  (TFUN) CoSum,             STATEMENT,    PARTEST}
00229     ,{"switch",               (TFUN) CoSwitch,         STATEMENT,    PARTEST}
00230     ,{"table",                (TFUN) CoTable,           DECLARATION,  PARTEST}
00231     ,{"tablebase",           (TFUN) CoTableBase,       DECLARATION,  PARTEST}
00232     ,{"tb",                   (TFUN) CoTableBase,       DECLARATION,  PARTEST}
00233     ,{"term",                 (TFUN) CoTerm,            STATEMENT,    PARTEST}
00234     ,{"testuse",              (TFUN) CoTestUse,         STATEMENT,    PARTEST}
00235     ,{"threadbucketsize",    (TFUN) CoThreadBucket,    DECLARATION,  PARTEST}
00236 #ifdef WITHFLOAT
00237     ,{"tofloat",              (TFUN) CoToFloat,         STATEMENT,    PARTEST}
00238 #endif
00239     ,{"topolynomial",         (TFUN) CoToPolynomial,    STATEMENT,    PARTEST}
00240 #ifdef WITHFLOAT
00241     ,{"torat",                (TFUN) CoToRat,           STATEMENT,    PARTEST}
00242     ,{"torational",          (TFUN) CoToRat,           STATEMENT,    PARTEST}
00243 #endif
00244     ,{"tospectator",          (TFUN) CoToSpectator,     STATEMENT,    PARTEST}
00245     ,{"totensor",             (TFUN) CoToTensor,        STATEMENT,    PARTEST}
00246     ,{"tovector",             (TFUN) CoToVector,        STATEMENT,    PARTEST}
00247     ,{"trace4",               (TFUN) CoTrace4,          STATEMENT,    PARTEST}
00248     ,{"tracen",               (TFUN) CoTraceN,          STATEMENT,    PARTEST}
00249     ,{"transform",            (TFUN) CoTransform,       STATEMENT,    PARTEST}
00250     ,{"tryreplace",           (TFUN) CoTryReplace,      STATEMENT,    PARTEST}
00251     ,{"unfactorize",          (TFUN) CoUnFactorize,     TOOUTPUT,     PARTEST}
00252     ,{"unhide",               (TFUN) CoUnHide,          SPECIFICATION, PARTEST}
00253     ,{"vertex",               (TFUN) CoVertex,          DECLARATION,  PARTEST}
00254     ,{"while",                (TFUN) CoWhile,           STATEMENT,    PARTEST}
00255 };
00256
00257 int alfatable1[27];
00258
00259 #define OPTION0 1
00260 #define OPTION1 2
00261 #define OPTION2 3
00262
00263 typedef struct SuBbUf {
00264     WORD    subexpnum;
00265     WORD    buffernum;
00266 } SUBBUF;
00267
00268 SUBBUF *subexpbuffers = 0;
00269 SUBBUF *topsubexpbuffers = 0;
00270 LONG insubexpbuffers = 0;
00271
00272 #define REDUCESUBEXPBUFFERS { if ( (topsubexpbuffers-subexpbuffers) > 256 ) {\
00273     M_free(subexpbuffers,"subexpbuffers");\
00274     subexpbuffers = (SUBBUF *)Malloc1(256*sizeof(SUBBUF),"subexpbuffers");\
00275     topsubexpbuffers = subexpbuffers+256; } insubexpbuffers = 0; }
00276
00277 #if BITSINWORD == 32
00278 #define PUTNUMBER128(t,n) { if ( n >= 2097152 ) { \
00279     *t++ = ((n/128)/128)/128; *t++ = ((n/128)/128)%128; *t++ = (n/128)%128; *t++ = n%128;
00280 } \
00281     else if ( n >= 16384 ) { \
00282     *t++ = n/(128*128); *t++ = (n/128)%128; *t++ = n%128; } \
00283     else if ( n >= 128 ) { *t++ = n/128; *t++ = n%128; } \
00284     else *t++ = n; }
00285 #define PUTNUMBER100(t,n) { if ( n >= 1000000 ) { \
00286     *t++ = ((n/100)/100)/100; *t++ = ((n/100)/100)%100; *t++ = (n/100)%100; *t++ = n%100;
00287 } \
00288     else if ( n >= 10000 ) { \
00289     *t++ = n/10000; *t++ = (n/100)%100; *t++ = n%100; } \
00290     else if ( n >= 100 ) { *t++ = n/100; *t++ = n%100; } \
00291     else *t++ = n; }
00292 #elif BITSINWORD == 16
00293 #define PUTNUMBER128(t,n) { if ( n >= 16384 ) { \
00294     *t++ = n/(128*128); *t++ = (n/128)%128; *t++ = n%128; } \
00295     else if ( n >= 128 ) { *t++ = n/128; *t++ = n%128; } \
00296     else *t++ = n; }
00297 #define PUTNUMBER100(t,n) { if ( n >= 10000 ) { \
00298     *t++ = n/10000; *t++ = (n/100)%100; *t++ = n%100; } \
00299     else if ( n >= 100 ) { *t++ = n/100; *t++ = n%100; } \
00300     else *t++ = n; }
00301 #else
00302 #error Only 64-bit and 32-bit platforms are supported.
00303 #endif
00304 /*

```

```

00304     )}}
00305     #] includes :
00306     #[ Compiler :
00307         #[ inictable :
00308
00309         Routine sets the table for 1-st characters that allow a faster
00310         start in the search in table 1 which should be sequential.
00311         Search in table 2 can be binary.
00312     */
00313
00314     void inictable(void)
00315     {
00316         KEYWORD *k = com1commands;
00317         int i, j, ksize;
00318         ksize = sizeof(com1commands)/sizeof(KEYWORD);
00319         j = 0;
00320         alfatable1[0] = 0;
00321         for ( i = 0; i < 26; i++ ) {
00322             while ( j < ksize && k[j].name[0] == 'a'+i ) j++;
00323             alfatable1[i+1] = j;
00324         }
00325     }
00326
00327     /*
00328         #] inictable :
00329         #[ findcommand :
00330
00331         Checks whether a command is in the command table.
00332         If so a pointer to the table element is returned.
00333         If not we return 0.
00334         Note that when a command is not in the table, we have
00335         to test whether it is an id command without id. It should
00336         then have the structure pattern = rhs. This should be done
00337         in the calling routine.
00338     */
00339
00340     KEYWORD *findcommand(UBYTE *in)
00341     {
00342         int hi, med, lo, i;
00343         UBYTE *s, c;
00344         s = in;
00345         while ( FG.cTable[*s] <= 1 ) s++;
00346         if ( s > in && *s == '[' && s[1] == ']' ) s += 2;
00347         if ( *s ) { c = *s; *s = 0; }
00348         else c = 0;
00349     /*
00350         First do a binary search in the second table
00351     */
00352         lo = 0;
00353         hi = sizeof(com2commands)/sizeof(KEYWORD)-1;
00354         do {
00355             med = ( hi + lo ) / 2;
00356             i = StrICmp(in, (UBYTE *)com2commands[med].name);
00357             if ( i == 0 ) { if ( c ) *s = c; return(com2commands+med); }
00358             if ( i < 0 ) hi = med-1;
00359             else lo = med+1;
00360         } while ( hi >= lo );
00361     /*
00362         Now do a 'hashed' search in the first table. It is sequential.
00363     */
00364         i = tolower(*in) - 'a';
00365         med = alfatable1[i];
00366         hi = alfatable1[i+1];
00367         while ( med < hi ) {
00368             if ( StrICont(in, (UBYTE *)com1commands[med].name) == 0 )
00369                 { if ( c ) *s = c; return(com1commands+med); }
00370             med++;
00371         }
00372         if ( c ) *s = c;
00373     /*
00374         Unrecognized. Too bad!
00375     */
00376         return(0);
00377     }
00378
00379     /*
00380         #] findcommand :
00381         #[ ParenthesesTest :
00382     */
00383
00384     int ParenthesesTest(UBYTE *sin)
00385     {
00386         WORD L1 = 0, L2 = 0, L3 = 0;
00387         UBYTE *s = sin;
00388         while ( *s ) {
00389             if ( *s == '[' ) L1++;
00390             else if ( *s == ']' ) {

```

```

00391         L1--;
00392         if ( L1 < 0 ) { MesPrint("&Unmatched []"); return(1); }
00393     }
00394     s++;
00395 }
00396 if ( L1 > 0 ) { MesPrint("&Unmatched []"); return(1); }
00397 s = sin;
00398 while ( *s ) {
00399     if ( *s == '[' ) SKIPBRA1(s)
00400     else if ( *s == '(' ) { L2++; s++; }
00401     else if ( *s == ')' ) {
00402         L2--; s++;
00403         if ( L2 < 0 ) { MesPrint("&Unmatched ()"); return(1); }
00404     }
00405     else s++;
00406 }
00407 if ( L2 > 0 ) { MesPrint("&Unmatched ()"); return(1); }
00408 s = sin;
00409 while ( *s ) {
00410     if ( *s == '[' ) SKIPBRA1(s)
00411     else if ( *s == '[' ) SKIPBRA4(s)
00412     else if ( *s == '{' ) { L3++; s++; }
00413     else if ( *s == '}' ) {
00414         L3--; s++;
00415         if ( L3 < 0 ) { MesPrint("&Unmatched {}"); return(1); }
00416     }
00417     else s++;
00418 }
00419 if ( L3 > 0 ) { MesPrint("&Unmatched {}"); return(1); }
00420 return(0);
00421 }
00422
00423 /*
00424     #] ParenthesesTest :
00425     #[ SkipAName :
00426
00427     Skips a name and gives a pointer to the object after the name.
00428     If there is not a proper name, it returns a zero pointer.
00429     In principle the brackets match already, so the `if ( *s == 0 )'
00430     code is not really needed, but you never know how the program
00431     is extended later.
00432 */
00433
00434 UBYTE *SkipAName(UBYTE *s)
00435 {
00436     UBYTE *t = s;
00437     if ( *s == '[' ) {
00438         SKIPBRA1(s)
00439         if ( *s == 0 ) {
00440             MesPrint("&Illegal name: '%s'",t);
00441             return(0);
00442         }
00443         s++;
00444     }
00445     else if ( FG.cTable[*s] == 0 || *s == '_' || *s == '$' ) {
00446         if ( *s == '$' ) s++;
00447         while ( FG.cTable[*s] <= 1 ) s++;
00448         if ( *s == '_' ) s++;
00449     }
00450     else {
00451         MesPrint("&Illegal name: '%s'",t);
00452         return(0);
00453     }
00454     return(s);
00455 }
00456
00457 /*
00458     #] SkipAName :
00459     #[ IsRHS :
00460 */
00461
00462 UBYTE *IsRHS(UBYTE *s, UBYTE c)
00463 {
00464     while ( *s && *s != c ) {
00465         if ( *s == '[' ) {
00466             SKIPBRA1(s);
00467             if ( *s != ']' ) {
00468                 MesPrint("&Unmatched []");
00469                 return(0);
00470             }
00471         }
00472         else if ( *s == '{' ) {
00473             SKIPBRA2(s);
00474             if ( *s != '}' ) {
00475                 MesPrint("&Unmatched {}");
00476                 return(0);
00477             }

```

```

00478     }
00479     else if ( *s == '(' ) {
00480         SKIPBRA3(s);
00481         if ( *s != ')' ) {
00482             MesPrint("&Unmatched ( )");
00483             return(0);
00484         }
00485     }
00486     else if ( *s == '[' ) {
00487         MesPrint("&Unmatched ( )");
00488         return(0);
00489     }
00490     else if ( *s == '{' ) {
00491         MesPrint("&Unmatched {}");
00492         return(0);
00493     }
00494     else if ( *s == ']' ) {
00495         MesPrint("&Unmatched []");
00496         return(0);
00497     }
00498     s++;
00499 }
00500 return(s);
00501 }
00502
00503 /*
00504     #] IsRHS :
00505     #[ IsIdStatement :
00506 */
00507
00508 int IsIdStatement(UBYTE *s)
00509 {
00510     DUMMYUSE(s);
00511     return(0);
00512 }
00513
00514 /*
00515     #] IsIdStatement :
00516     #[ CompileAlgebra :
00517
00518     Returns either the number of the main level RHS (>= 0)
00519     or an error code (< 0)
00520 */
00521
00522 int CompileAlgebra(UBYTE *s, int leftright, WORD *prototype)
00523 {
00524     GETIDENTITY
00525     int error;
00526     WORD *oldproto = AC.ProtoType;
00527     AC.ProtoType = prototype;
00528     if ( AC.TokensWriteFlag ) {
00529         MesPrint("To tokenize: %s",s);
00530         error = tokenize(s,leftright);
00531         MesPrint(" The contents of the token buffer are:");
00532         WriteTokens(AC.tokens);
00533     }
00534     else error = tokenize(s,leftright);
00535     if ( error == 0 ) {
00536         AR.Eside = leftright;
00537         AC.CompileLevel = 0;
00538         if ( leftright == LHSIDE ) { AC.DumNum = AR.CurDum = 0; }
00539         error = CompileSubExpressions(AC.tokens);
00540         REDUCESUBEXPBUFFERS
00541     }
00542     else {
00543         AC.ProtoType = oldproto;
00544         return(-1);
00545     }
00546     AC.ProtoType = oldproto;
00547     if ( error < 0 ) return(-1);
00548     else if ( leftright == LHSIDE ) return(cbuf[AC.cbufnum].numlhs);
00549     else return(cbuf[AC.cbufnum].numrhs);
00550 }
00551
00552 /*
00553     #] CompileAlgebra :
00554     #[ CompileStatement :
00555 */
00556 /*
00557
00558 int CompileStatement(UBYTE *in)
00559 {
00560     KEYWORD *k;
00561     UBYTE *s;
00562     int error1 = 0, error2;
00563     /* A.iStatement = */ s = in;
00564     if ( *s == 0 ) return(0);

```

```

00565     if ( *s == '$' ) {
00566         k = findcommand((UBYTE *)"assign");
00567     }
00568     else {
00569         if ( ( k = findcommand(s) ) == 0 && IsIdStatement(s) == 0 ) {
00570             MesPrint("&Unrecognized statement %s",s);
00571             return(1);
00572         }
00573         if ( k == 0 ) { /* Id statement without id. Note: id must be in table */
00574             k = comlcommands + alfatable1['i'-'a'];
00575             while ( k->name[1] != 'd' || k->name[2] ) k++;
00576         }
00577         else {
00578             while ( FG.cTable[*s] <= 1 ) s++;
00579             if ( s > in && *s == '[' && s[1] == ']' ) s += 2;
00580 /*
00581     The next statement is rather mysterious
00582     It is undone in DoPrint and CoMultiply, but it also causes effects
00583     in other (wrong) statements like dimension -4; or Trace4 -1;
00584     The code in pre.c (LoadStatement) has been changed 8-sep-2009
00585     to force a comma after the keyword. This means that the
00586     'mysterious' line is automatically inactive. Hence it is taken out.
00587
00588     if ( *s == '+' || *s == '-' ) s++;
00589 */
00590             if ( *s == ',' ) s++;
00591         }
00592     }
00593 /*
00594     First the test on the order of the statements.
00595     This is relatively new (2.2c) and may cause some problems with old
00596     programs. Hence the first error message should explain!
00597 */
00598     if ( AP.PreAssignFlag == 0 && AM.OldOrderFlag == 0 ) {
00599         if ( AP.PreInsideLevel ) {
00600             if ( k->type != STATEMENT && k->type != MIXED ) {
00601                 MesPrint("&Only executable and print statements are allowed in an %#inside/%#endinside
00602 construction");
00603                 return(-1);
00604             }
00605         }
00606         else {
00607             if ( ( AC.compiletype == DECLARATION || AC.compiletype == SPECIFICATION )
00608                 && ( k->type == STATEMENT || k->type == DEFINITION || k->type == TOOOUTPUT ) ) {
00609                 if ( AC.tablecheck == 0 ) {
00610                     AC.tablecheck = 1;
00611                     if ( TestTables() ) error1 = 1;
00612                 }
00613                 if ( k->type == MIXED ) {
00614                     if ( AC.compiletype <= DEFINITION ) {
00615                         AC.compiletype = STATEMENT;
00616                     }
00617                 }
00618                 else if ( k->type == MIXED2 ) {}
00619                 else if ( k->type > AC.compiletype ) {
00620                     if ( StrCmp((UBYTE *) (k->name), (UBYTE *) "format") != 0 )
00621                         AC.compiletype = k->type;
00622                 }
00623                 else if ( k->type < AC.compiletype ) {
00624                     switch ( k->type ) {
00625                         case DECLARATION:
00626                             MesPrint("&Declaration out of order");
00627                             MesPrint("& %s",in);
00628                             break;
00629                         case DEFINITION:
00630                             MesPrint("&Definition out of order");
00631                             MesPrint("& %s",in);
00632                             break;
00633                         case SPECIFICATION:
00634                             MesPrint("&Specification out of order");
00635                             MesPrint("& %s",in);
00636                             break;
00637                         case STATEMENT:
00638                             MesPrint("&Statement out of order");
00639                             break;
00640                         case TOOOUTPUT:
00641                             MesPrint("&Output control statement out of order");
00642                             MesPrint("& %s",in);
00643                             break;
00644                     }
00645                     AC.compiletype = k->type;
00646                     if ( AC.firstctypemessage == 0 ) {
00647                         MesPrint("&Proper order inside a module is:");
00648                         MesPrint("Declarations, specifications, definitions, statements, output control
00649 statements");
00650                     }
00651                     AC.firstctypemessage = 1;

```



```

00650     }
00651     error1 = 1;
00652 }
00653 }
00654 }
00655 /*
00656 Now we execute the tests that are prescribed by the flags.
00657 */
00658 if ( AC.AutoDeclareFlag && ( ( k->flags & WITHAUTO ) == 0 ) ) {
00659     MesPrint("&Illegal type of auto-declaration");
00660     return(1);
00661 }
00662 if ( ( ( k->flags & PARTEST ) != 0 ) && ParenthesesTest(s) ) return(1);
00663 error2 = (*k->func)(s);
00664 if ( error2 == 0 ) return(error1);
00665 return(error2);
00666 }
00667
00668 /*
00669 #] CompileStatement :
00670 #[ TestTables :
00671 */
00672
00673 int TestTables(void)
00674 {
00675     FUNCTIONS f = functions;
00676     TABLES t;
00677     WORD j;
00678     int error = 0, i;
00679     LONG x;
00680     i = NumFunctions + FUNCTION - MAXBUILTINFUNCTION - 1;
00681     f = f + MAXBUILTINFUNCTION - FUNCTION + 1;
00682     if ( AC.MustTestTable > 0 ) {
00683         while ( i > 0 ) {
00684             if ( ( t = f->tabl ) != 0 && t->strict > 0 && !t->sparse ) {
00685                 for ( x = 0, j = 0; x < t->totind; x++ ) {
00686                     if ( t->tablepointers[TABLEEXTENSION*x] < 0 ) j++;
00687                 }
00688                 if ( j > 0 ) {
00689                     if ( j > 1 ) {
00690                         MesPrint("&In table %s there are %d unfilled elements",
00691                             AC.varnames->namebuffer+f->name, j);
00692                     }
00693                     else {
00694                         MesPrint("&In table %s there is one unfilled element",
00695                             AC.varnames->namebuffer+f->name);
00696                     }
00697                     error = 1;
00698                 }
00699             }
00700             i--; f++;
00701         }
00702         AC.MustTestTable--;
00703     }
00704     return(error);
00705 }
00706
00707 /*
00708 #] TestTables :
00709 #[ CompileSubExpressions :
00710
00711 Now we attack the subexpressions from inside out.
00712 We try to see whether we had any of them already.
00713 We have to worry about adding the wildcard sum parameter
00714 to the prototype.
00715 */
00716
00717 int CompileSubExpressions(SBYTE *tokens)
00718 {
00719     GETIDENTITY
00720     SBYTE *fill = tokens, *s = tokens, *t;
00721     WORD number[MAXNUMSIZE], *oldwork, *w1, *w2;
00722     int level, num, i, sumlevel = 0, sumtype = SYMTOSYM;
00723     int retval, error = 0;
00724     /*
00725 Eliminate all subexpressions. They are marked by LPARENTHESIS, RPARENTHESIS
00726 */
00727     AC.CompileLevel++;
00728     while ( *s != TENDOFIT ) {
00729         if ( *s == TFUNOPEN ) {
00730             if ( fill < s ) *fill = TENDOFIT;
00731             t = fill - 1;
00732             while ( t >= tokens && t[0] >= 0 ) t--;
00733             if ( t >= tokens && *t == TFUNCTION ) {
00734                 t++; i = 0; while ( *t >= 0 ) i = 128*i + *t++;
00735                 if ( i == AM.sumnum || i == AM.sumpnum ) {
00736                     t = s + 1;

```

```

00737         if ( *t == TSYMBOL || *t == TINDEX ) {
00738             t++; i = 0; while ( *t >= 0 ) i = 128*i + *t++;
00739             if ( s[1] == TINDEX ) {
00740                 i += AM.OffsetIndex;
00741                 sumtype = INDTOIND;
00742             }
00743             else sumtype = SYMTOSYM;
00744             sumlevel = i;
00745         }
00746     }
00747 }
00748 *fill++ = *s++;
00749 }
00750 else if ( *s == TFUNCLOSE ) { sumlevel = 0; *fill++ = *s++; }
00751 else if ( *s == LPARENTHESIS ) {
00752     /*
00753         We must make an exception here.
00754         If the subexpression is just an integer, whatever its length,
00755         we should try to keep it.
00756         This is important when we have a function with an integer
00757         argument. In particular this is relevant for the MZV program.
00758     */
00759     t = s; level = 0;
00760     while ( level >= 0 ) {
00761         s++;
00762         if ( *s == LPARENTHESIS ) level++;
00763         else if ( *s == RPARENTHESIS ) level--;
00764         else if ( *s == TENDOFIT ) {
00765             MesPrint("&Unbalanced subexpression parentheses");
00766             return(-1);
00767         }
00768     }
00769     t++; *s = TENDOFIT;
00770     if ( sumlevel > 0 ) { /* Inside sum. Add wildcard to prototype */
00771         oldwork = w1 = AT.WorkPointer;
00772         w2 = AC.ProtoType;
00773         i = w2[1];
00774         while ( --i >= 0 ) *w1++ = *w2++;
00775         oldwork[1] += 4;
00776         *w1++ = sumtype; *w1++ = 4; *w1++ = sumlevel; *w1++ = sumlevel;
00777         w2 = AC.ProtoType; AT.WorkPointer = w1;
00778         AC.ProtoType = oldwork;
00779         num = CompileSubExpressions(t);
00780         AC.ProtoType = w2; AT.WorkPointer = oldwork;
00781     }
00782     else num = CompileSubExpressions(t);
00783     if ( num < 0 ) return(-1);
00784     /*
00785         Note that the subexpression code should always fit.
00786         We had two parentheses and at least two bytes contents.
00787         There cannot be more than 2^21 subexpressions or we get outside
00788         this minimum. Ignoring this might lead to really rare and
00789         hard to find errors, years from now.
00790     */
00791     if ( insubexpbuffers >= MAXSUBEXPRESSIONS ) {
00792         MesPrint("&More than %d subexpressions inside one
expression", (WORD)MAXSUBEXPRESSIONS);
00793         Terminate(-1);
00794     }
00795     if ( subexpbuffers+insubexpbuffers >= topsubexpbuffers ) {
00796         DoubleBuffer((void **)((void *)(&subexpbuffers))
, (void **)((void *)(&topsubexpbuffers)), sizeof(SUBBUF), "subexpbuffers");
00797     }
00798     subexpbuffers[insubexpbuffers].subexpnum = num;
00799     subexpbuffers[insubexpbuffers].buffernum = AC.cbufnum;
00800     num = insubexpbuffers++;
00801     *fill++ = TSUBEXP;
00802     i = 0;
00803     do { number[i++] = num & 0x7F; num >>= 7; } while ( num );
00804     while ( --i >= 0 ) *fill++ = (SBYTE)(number[i]);
00805     s++;
00806 }
00807 else if ( *s == EMPTY ) s++;
00808 else *fill++ = *s++;
00809 }
00810 *fill = TENDOFIT;
00811 /*
00812 At this stage there are no more subexpressions.
00813 Hence we can do the basic compilation.
00814 */
00815 if ( AC.CompileLevel == 1 && AC.ToBeInFactors ) {
00816     error = CodeFactors(tokens);
00817 }
00818 AC.CompileLevel--;
00819 retval = CodeGenerator(tokens);
00820 if ( error < 0 ) return(error);
00821 return(retval);

```

```

00823 }
00824
00825 /*
00826     #] CompileSubExpressions :
00827     #[ CodeGenerator :
00828
00829     This routine does the real code generation.
00830     It returns the number of the rhs subexpression.
00831     At this point we do not have to worry about subexpressions,
00832     sets, setelements, simple vs complicated function arguments
00833     simple vs complicated powers etc.
00834
00835     The variable 'first' indicates whether we are starting a new term
00836
00837     The major complication are the set elements of type set[n].
00838     We have marked them as TSETNUM,n,Ttype,setnum
00839     They go into
00840     SETSET,size,subterm,relocation list
00841     in which the subterm should be ready to become a regular
00842     subterm in which the sets have been replaced by their element
00843     The relocation list consists of pairs of numbers:
00844     1: offset in the subterm, 2: the symbol n.
00845     Note that such a subterm can be a whole function with its arguments.
00846     We use the variable inset to indicate that we have something going.
00847     The relocation list is collected in the top of the Workspace.
00848 */
00849
00850 static UWORD *CGscrat7 = 0;
00851
00852 int CodeGenerator(SBYTE *tokens)
00853 {
00854     GETIDENTITY
00855     SBYTE *s = tokens, c;
00856     int i, sign = 1, first = 1, deno = 1, error = 0, minus, n, needarg, numexp, cc;
00857     int base, sumlevel = 0, sumtype = SYMTOSYM, firstsumarg, inset = 0;
00858     int funflag = 0, setttype, x1, x2, mulflag = 0;
00859     WORD *t, *v, *r, *term, nnumerator, ndenominator, *oldwork, x3, y, nin;
00860     WORD *w1, *w2, *tsize = 0, *relo = 0;
00861     UWORD *numerator, *denominator, *innum;
00862     CBUF *C;
00863     POSITION position;
00864     WORD Tmproto[SUBEXPSIZE];
00865 /*
00866 #ifdef WITHPTHREADS
00867     RENUMBER renumber;
00868 #endif
00869 */
00870     RENUMBER renumber;
00871     if ( AC.TokensWriteFlag ) WriteTokens(tokens);
00872     if ( CGscrat7 == 0 )
00873         CGscrat7 = (UWORD *)Malloc1((AM.MaxTal+2)*sizeof(WORD),"CodeGenerator");
00874     AddRHS(AC.cbufnum,0);
00875     C = cbuf + AC.cbufnum;
00876     numexp = C->numrhs;
00877     C->NumTerms[numexp] = 0;
00878     C->numdum[numexp] = 0;
00879     oldwork = AT.WorkPointer;
00880     numerator = (UWORD *) (AT.WorkPointer);
00881     denominator = numerator + 2*AM.MaxTal;
00882     innum = denominator + 2*AM.MaxTal;
00883     term = (WORD *) (innum + 2*AM.MaxTal);
00884     AT.WorkPointer = term + AM.MaxTer/sizeof(WORD);
00885     if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
00886     cc = 0;
00887     t = term+1;
00888     numerator[0] = denominator[0] = 1;
00889     numerator = ndenominator = 1;
00890     while ( *s != TENDOFIT ) {
00891         if ( *s == TPLUS || *s == TMINUS ) {
00892             if ( first || mulflag ) { if ( *s == TMINUS ) sign = -sign; }
00893             else {
00894                 *term = t-term;
00895                 C->NumTerms[numexp]++;
00896                 if ( cc && sign ) C->CanCommu[numexp]++;
00897                 CompleteTerm(term,numerator,denominator,nnumerator,ndenominator,sign);
00898                 first = 1; cc = 0; t = term + 1; deno = 1;
00899                 numerator[0] = denominator[0] = 1;
00900                 nnumerator = ndenominator = 1;
00901                 if ( *s == TMINUS ) sign = -1;
00902                 else sign = 1;
00903             }
00904             s++;
00905         }
00906         else {
00907             mulflag = first = 0; c = *s++;
00908             switch ( c ) {
00909                 case TSymbOL:

```

```

00910         x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
00911         if ( *s == TWILDCARD ) { s++; x1 += 2*MAXPOWER; }
00912         *t++ = SYMBOL; *t++ = 4; *t++ = x1;
00913         if ( inset ) *relo = 2;
00914 TryPower:    if ( *s == TPOWER ) {
00915                 s++;
00916                 if ( *s == TMINUS ) { s++; deno = -deno; }
00917                 c = *s++;
00918                 base = ( c == TNUMBER ) ? 100: 128;
00919                 x2 = 0; while ( *s >= 0 ) { x2 = base*x2 + *s++; }
00920                 if ( c == TSYMBOL ) {
00921                         if ( *s == TWILDCARD ) s++;
00922                         x2 += 2*MAXPOWER;
00923                 }
00924                 *t++ = deno*x2;
00925         }
00926         else *t++ = deno;
00927         deno = 1;
00928 fin:         if ( inset ) {
00929                 while ( relo < AT.WorkTop ) *t++ = *relo++;
00930                 inset = 0; tsize[1] = t - tsize;
00931         }
00932         break;
00933 case TINDEX:
00934         x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
00935         *t++ = INDEX; *t++ = 3;
00936         if ( *s == TWILDCARD ) { s++; x1 += WILDOFFSET; }
00937         if ( inset ) { *t++ = x1; *relo = 2; }
00938         else *t++ = x1 + AM.OffsetIndex;
00939         if ( t[-1] > AM.IndDum ) {
00940                 x1 = t[-1] - AM.IndDum;
00941                 if ( x1 > C->numdum[numexp] ) C->numdum[numexp] = x1;
00942         }
00943         goto fin;
00944 case TGENINDEX:
00945         *t++ = INDEX; *t++ = 3; *t++ = AC.DumNum+WILDOFFSET;
00946         deno = 1;
00947         break;
00948 case TVECTOR:
00949         x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
00950 dovector:    if ( inset == 0 ) x1 += AM.OffsetVector;
00951         if ( *s == TWILDCARD ) { s++; x1 += WILDOFFSET; }
00952         if ( inset ) *relo = 2;
00953         if ( *s == TDOT ) { /* DotProduct ? */
00954                 s++;
00955                 if ( *s == TSETNUM || *s == TSETDOL ) {
00956                         settype = ( *s == TSETDOL );
00957                         s++; x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
00958                         if ( settype ) x2 = -x2;
00959                         if ( inset == 0 ) {
00960                                 tsize = t; *t++ = SETSET; *t++ = 0;
00961                                 relo = AT.WorkTop;
00962                         }
00963                         inset += 2;
00964                         *--relo = x2; *--relo = 3;
00965                 }
00966                 if ( *s != TVECTOR && *s != TDUBIOUS ) {
00967                         MesPrint("&Illegally formed dotproduct");
00968                         error = 1;
00969                 }
00970                 s++; x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
00971                 if ( inset < 2 ) x2 += AM.OffsetVector;
00972                 if ( *s == TWILDCARD ) { s++; x2 += WILDOFFSET; }
00973                 *t++ = DOTPRODUCT; *t++ = 5; *t++ = x1; *t++ = x2;
00974                 goto TryPower;
00975         }
00976         else if ( *s == TFUNOPEN ) {
00977                 s++;
00978                 if ( *s == TSETNUM || *s == TSETDOL ) {
00979                         settype = ( *s == TSETDOL );
00980                         s++; x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
00981                         if ( settype ) x2 = -x2;
00982                         if ( inset == 0 ) {
00983                                 tsize = t; *t++ = SETSET; *t++ = 0;
00984                                 relo = AT.WorkTop;
00985                         }
00986                         inset += 2;
00987                         *--relo = x2; *--relo = 3;
00988                 }
00989                 if ( *s == TINDEX || *s == TDUBIOUS ) {
00990                         s++;
00991                         x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
00992                         if ( inset < 2 ) x2 += AM.OffsetIndex;
00993                         if ( *s == TWILDCARD ) { s++; x2 += WILDOFFSET; }
00994                         *t++ = VECTOR; *t++ = 4; *t++ = x1; *t++ = x2;
00995                         if ( t[-1] > AM.IndDum ) {
00996                                 x2 = t[-1] - AM.IndDum;

```

```

00997         if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
00998     }
00999 }
01000 else if ( *s == TGENINDEX ) {
01001     *t++ = VECTOR; *t++ = 4; *t++ = x1;
01002     *t++ = AC.DumNum + WILDOffset;
01003 }
01004 else if ( *s == TNUMBER || *s == TNUMBER1 ) {
01005     base = ( *s == TNUMBER ) ? 100: 128;
01006     s++;
01007     x2 = 0; while ( *s >= 0 ) { x2 = x2*base + *s++; }
01008     if ( x2 >= AM.OffsetIndex && inset < 2 ) {
01009         MesPrint("&Fixed index in vector greater than %d",
01010             AM.OffsetIndex);
01011         return(-1);
01012     }
01013     *t++ = VECTOR; *t++ = 4; *t++ = x1; *t++ = x2;
01014 }
01015 else if ( *s == TVECTOR || ( *s == TMINUS && s[1] == TVECTOR ) ) {
01016     if ( *s == TMINUS ) { s++; sign = -sign; }
01017     s++;
01018     x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
01019     if ( inset < 2 ) x2 += AM.OffsetVector;
01020     if ( *s == TWILDCARD ) { s++; x2 += WILDOffset; }
01021     *t++ = DOTPRODUCT; *t++ = 5; *t++ = x1; *t++ = x2; *t++ = deno;
01022 }
01023 else {
01024     MesPrint("&Illegal argument for vector");
01025     return(-1);
01026 }
01027 if ( *s != TFUNCLOSE ) {
01028     MesPrint("&Illegal argument for vector");
01029     return(-1);
01030 }
01031 s++;
01032 }
01033 else {
01034     if ( AC.DumNum ) {
01035         *t++ = VECTOR; *t++ = 4; *t++ = x1;
01036         *t++ = AC.DumNum + WILDOffset;
01037     }
01038     else {
01039         *t++ = INDEX; *t++ = 3; *t++ = x1;
01040     }
01041 }
01042 goto fin;
01043 case TDELTA:
01044     if ( *s != TFUNOPEN ) {
01045         MesPrint("&d_ needs two arguments");
01046         error = -1;
01047     }
01048     v = t; *t++ = DELTA; *t++ = 4;
01049     needarg = 2; x3 = x1 = -1;
01050     goto dotensor;
01051 case TFUNCTION:
01052     x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
01053     if ( x1 == AM.sumnum || x1 == AM.sumpnum ) sumlevel = x1;
01054     x1 += FUNCTION;
01055     if ( x1 == FIRSTBRACKET ) {
01056         if ( s[0] == TFUNOPEN && s[1] == TEXPRESS ) {
01057             doexpr:
01058                 s += 2;
01059                 *t++ = x1; *t++ = FUNHEAD+2; *t++ = 0;
01060                 if ( x1 == AR.PolyFun && AR.PolyFunType == 2 && AR.Eside != LHSIDE )
01061                     t[-1] |= MUSTCLEANPRF;
01062                 FILLFUN3(t)
01063                 x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
01064                 *t++ = -EXPRESSION; *t++ = x2;
01065             /*
01066             The next code is added to facilitate parallel processing
01067             We need to call GetTable here to make sure all processors
01068             have the same numbering of all variables.
01069             */
01070             if ( Expressions[x2].status == STOREDEXPRESSION ) {
01071                 Tmproto[0] = EXPRESSION;
01072                 Tmproto[1] = SUBEXPSIZE;
01073                 Tmproto[2] = x2;
01074                 Tmproto[3] = 1;
01075                 { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) Tmproto[ie] = 0; }
01076                 AT.Tmaddr = Tmproto;
01077                 PUTZERO(position);
01078             }
01079             if ( (
01080                 #ifdef WITHPTHREADS
01081                 renumber =
01082                 #endif
01083                 GetTable(x2,&position,0) == 0 ) {
01084                 error = 1;

```

```

01084             MesPrint("&Problems getting information about stored expression %s(1) "
01085             ,EXPRNAME(x2));
01086         }
01087 #ifdef WITHPTHREADS
01088         M_free(renumber->symb.lo,"VarSpace");
01089         M_free(renumber,"Renumbr");
01090 #endif
01091 */
01092         if ( ( renumber = GetTable(x2,&position,0) ) == 0 ) {
01093             error = 1;
01094             MesPrint("&Problems getting information about stored expression %s(1) "
01095             ,EXPRNAME(x2));
01096         }
01097         if ( renumber->symb.lo != AN.dummyrenumlist )
01098             M_free(renumber->symb.lo,"VarSpace");
01099         M_free(renumber,"Renumbr");
01100         AR.StoreData.dirtyflag = 1;
01101     }
01102     if ( *s != TFUNCLOSE ) {
01103         if ( x1 == FIRSTBRACKET )
01104             MesPrint("&Problems with argument of FirstBracket_");
01105         else if ( x1 == FIRSTTERM )
01106             MesPrint("&Problems with argument of FirstTerm_");
01107         else if ( x1 == CONTENTTERM )
01108             MesPrint("&Problems with argument of FirstTerm_");
01109         else if ( x1 == TERMSINEXPR )
01110             MesPrint("&Problems with argument of TermsIn_");
01111         else if ( x1 == SIZEOFFUNCTION )
01112             MesPrint("&Problems with argument of SizeOf_");
01113         else if ( x1 == NUMFACTORS )
01114             MesPrint("&Problems with argument of NumFactors_");
01115         else
01116             MesPrint("&Problems with argument of FactorIn_");
01117         error = 1;
01118         while ( *s != TENDOFIT && *s != TFUNCLOSE ) s++;
01119     }
01120     if ( *s == TFUNCLOSE ) s++;
01121     goto fin;
01122 }
01123 }
01124 else if ( x1 == TERMSINEXPR || x1 == SIZEOFFUNCTION || x1 == FACTORIN
01125 || x1 == NUMFACTORS || x1 == FIRSTTERM || x1 == CONTENTTERM ) {
01126     if ( s[0] == TFUNOPEN && s[1] == TEXPRESSON ) goto doexpr;
01127     if ( s[0] == TFUNOPEN && s[1] == TDOLLAR ) {
01128         s += 2;
01129         *t++ = x1; *t++ = FUNHEAD+2; *t++ = 0;
01130         FILLFUN3(t)
01131         x2 = 0; while ( *s >= 0 ) { x2 = x2*128 + *s++; }
01132         *t++ = -DOLLAREXPRESSON; *t++ = x2;
01133         if ( *s != TFUNCLOSE ) {
01134             if ( x1 == TERMSINEXPR )
01135                 MesPrint("&Problems with argument of TermsIn_");
01136             else if ( x1 == SIZEOFFUNCTION )
01137                 MesPrint("&Problems with argument of SizeOf_");
01138             else if ( x1 == NUMFACTORS )
01139                 MesPrint("&Problems with argument of NumFactors_");
01140             else
01141                 MesPrint("&Problems with argument of FactorIn_");
01142             error = 1;
01143             while ( *s != TENDOFIT && *s != TFUNCLOSE ) s++;
01144         }
01145         if ( *s == TFUNCLOSE ) s++;
01146         goto fin;
01147     }
01148 }
01149 x3 = x1;
01150 if ( inset && ( t-tsize == 2 ) ) x1 -= FUNCTION;
01151 if ( *s == TWILDCARD ) { x1 += WILDOFFSET; s++; }
01152 if ( functions[x3-FUNCTION].commute ) cc = 1;
01153 if ( *s != TFUNOPEN ) {
01154     *t++ = x1; *t++ = FUNHEAD; *t++ = 0;
01155     if ( x1 == AR.PolyFun && AR.PolyFunType == 2 && AR.Eside != LHSIDE )
01156         t[-1] |= MUSTCLEANPRF;
01157     FILLFUN3(t) sumlevel = 0; goto fin;
01158 }
01159 v = t; *t++ = x1; *t++ = FUNHEAD; *t++ = DIRTYFLAG;
01160 if ( x1 == AR.PolyFun && AR.PolyFunType == 2 && AR.Eside != LHSIDE )
01161     t[-1] |= MUSTCLEANPRF;
01162 FILLFUN3(t)
01163 needarg = -1;
01164 if ( !inset && functions[x3-FUNCTION].spec >= TENSORFUNCTION ) {
01165     dotensor:
01166     do {
01167         if ( needarg == 0 ) {
01168             if ( x1 >= 0 ) {
01169                 x3 = x1;
01170                 if ( x3 >= FUNCTION+WILDOFFSET ) x3 -= WILDOFFSET;

```

```

01171             MesPrint("&Too many arguments in function %s",
01172                     VARNAME(functions, (x3-FUNCTION)) );
01173         }
01174     else
01175         MesPrint("&d_ needs exactly two arguments");
01176     error = -1;
01177     needarg--;
01178 }
01179 else if ( needarg > 0 ) needarg--;
01180 s++;
01181 c = *s++;
01182 if ( c == TMINUS && *s == TVECTOR ) { sign = -sign; c = *s++; }
01183 base = ( c == TNUMBER ) ? 100: 128;
01184 x2 = 0; while ( *s >= 0 ) { x2 = base*x2 + *s++; }
01185 if ( *s == TWILDCARD && c != TNUMBER ) { x2 += WILDOffset; s++; }
01186 if ( c == TSETNUM || c == TSETDOL ) {
01187     if ( c == TSETDOL ) x2 = -x2;
01188     if ( inset == 0 ) {
01189         w1 = t; t += 2; w2 = t;
01190         while ( w1 > v ) *--w2 = *--w1;
01191         tsize = v; relo = AT.WorkTop;
01192         *v++ = SETSET; *v++ = 0;
01193     }
01194     inset = 2; *--relo = x2; *--relo = t - v;
01195     c = *s++;
01196     x2 = 0; while ( *s >= 0 ) x2 = 128*x2 + *s++;
01197     switch ( c ) {
01198     case TINDEX:
01199         *t++ = x2;
01200         if ( t[-1]+AM.OffsetIndex > AM.IndDum ) {
01201             x2 = t[-1]+AM.OffsetIndex - AM.IndDum;
01202             if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01203         }
01204         break;
01205     case TVECTOR:
01206         *t++ = x2; break;
01207     case TNUMBER1:
01208         if ( x2 >= 0 && x2 < AM.OffsetIndex ) {
01209             *t++ = x2; break;
01210         }
01211         /* fall through */
01212     default:
01213         MesPrint("&Illegal type of set inside tensor");
01214         error = 1;
01215         *t++ = x2;
01216         break;
01217     }
01218 }
01219 else { switch ( c ) {
01220 case TINDEX:
01221     if ( inset < 2 ) *t++ = x2 + AM.OffsetIndex;
01222     else *t++ = x2;
01223     if ( x2+AM.OffsetIndex > AM.IndDum ) {
01224         x2 = x2+AM.OffsetIndex - AM.IndDum;
01225         if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01226     }
01227     break;
01228 case TGENINDEX:
01229     *t++ = AC.DumNum + WILDOffset;
01230     break;
01231 case TVECTOR:
01232     if ( inset < 2 ) *t++ = x2 + AM.OffsetVector;
01233     else *t++ = x2;
01234     break;
01235 case TWILDARG:
01236     *t++ = FUNNYWILD; *t++ = x2;
01237     v[2] = 0; /*
01238     break;
01239 case TDOLLAR:
01240     *t++ = FUNNYDOLLAR; *t++ = x2;
01241     break;
01242 case TDUBIOUS:
01243     if ( inset < 2 ) *t++ = x2 + AM.OffsetVector;
01244     else *t++ = x2;
01245     break;
01246 case TSGAMMA: /* Special gamma's */
01247     if ( x3 != GAMMA ) {
01248         MesPrint("&5_,6_,7_ can only be used inside g_");
01249         error = -1;
01250     }
01251     *t++ = -x2;
01252     break;
01253 case TNUMBER:
01254 case TNUMBER1:
01255     if ( x2 >= AM.OffsetIndex && inset < 2 ) {
01256         MesPrint("&Value of constant index in tensor too large");
01257         error = -1;

```

```

01258             }
01259             *t++ = x2;
01260             break;
01261         default:
01262             MesPrint("%Illegal object in tensor");
01263             error = -1;
01264             break;
01265     }}
01266     if ( inset >= 2 ) inset = 1;
01267 } while ( *s == TCOMMA );
01268 }
01269 else {
01270 dofunction: firstsumarg = 1;
01271 do {
01272     unsigned int ux2;
01273     s++;
01274     c = *s++;
01275     if ( c == TMINUS && ( *s == TVECTOR || *s == TNUMBER
01276 || *s == TNUMBER1 || *s == TSUBEXP ) ) {
01277         minus = 1; c = *s++;
01278     }
01279     else minus = 0;
01280     base = ( c == TNUMBER ) ? 100: 128;
01281     ux2 = 0; while ( *s >= 0 ) { ux2 = base*ux2 + *s++; }
01282     x2 = ux2; /* may cause an implementation-defined behaviour */
01283 } /*
01284          !!!!!!!! What if it does not fit?
01285 */
01286     if ( firstsumarg ) {
01287         firstsumarg = 0;
01288         if ( sumlevel > 0 ) {
01289             if ( c == TSYMBOL ) {
01290                 sumlevel = x2; sumtype = SYMTOSYM;
01291             }
01292             else if ( c == TINDEX ) {
01293                 sumlevel = x2+AM.OffsetIndex; sumtype = INDTOIND;
01294                 if ( sumlevel > AM.IndDum ) {
01295                     x2 = sumlevel - AM.IndDum;
01296                     if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01297                 }
01298             }
01299         }
01300     }
01301     if ( *s == TWILDCARD ) {
01302         if ( c == TSYMBOL ) x2 += 2*MAXPOWER;
01303         else if ( c != TNUMBER ) x2 += WILDOFFSET;
01304         s++;
01305     }
01306     switch ( c ) {
01307     case TSYMBOL:
01308         *t++ = -SYMBOL; *t++ = x2; break;
01309     case TDOLLAR:
01310         *t++ = -DOLLAREXPRESSION; *t++ = x2; break;
01311     case TEXPRESSION:
01312         *t++ = -EXPRESSION; *t++ = x2;
01313 } /*
01314          The next code is added to facilitate parallel processing
01315          We need to call GetTable here to make sure all processors
01316          have the same numbering of all variables.
01317 */
01318     if ( Expressions[x2].status == STOREDEXPRESSION ) {
01319         TMproto[0] = EXPRESSION;
01320         TMproto[1] = SUBEXPSIZE;
01321         TMproto[2] = x2;
01322         TMproto[3] = 1;
01323         { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
01324         AT.TMaddr = TMproto;
01325         PUTZERO(position);
01326 } /*
01327          if ( (
01328 #ifdef WITHPTHREADS
01329             renumber =
01330 #endif
01331             GetTable(x2,&position,0) ) == 0 ) {
01332             error = 1;
01333             MesPrint("&Problems getting information about stored
01334 expression %s(2)"
01335             ,EXPRNAME(x2));
01336 }
01337 #ifdef WITHPTHREADS
01338 M_free(renumber->symb.lo,"VarSpace");
01339 M_free(renumber,"Renumber");
01340 #endif
01341 } /*
01342          if ( ( renumber = GetTable(x2,&position,0) ) == 0 ) {
01343             error = 1;
01344             MesPrint("&Problems getting information about stored

```



```

expression %s(2) "
01344                                     ,EXPRNAME(x2));
01345     }
01346     if ( renumber->symb.lo != AN.dummyrenumlist )
01347         M_free(renumber->symb.lo, "VarSpace");
01348     M_free(renumber, "Renumber");
01349     AR.StoreData.dirtyflag = 1;
01350 }
01351 break;
01352 case TINDEX:
01353     *t++ = -INDEX; *t++ = x2 + AM.OffsetIndex;
01354     if ( t[-1] > AM.IndDum ) {
01355         x2 = t[-1] - AM.IndDum;
01356         if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01357     }
01358     break;
01359 case TGENINDEX:
01360     *t++ = -INDEX; *t++ = AC.DumNum + WILDOFFSET;
01361     break;
01362 case TVECTOR:
01363     if ( minus ) *t++ = -MINVECTOR;
01364     else *t++ = -VECTOR;
01365     *t++ = x2 + AM.OffsetVector;
01366     break;
01367 case TSGAMMA: /* Special gamma's */
01368     MesPrint("&5_,6_,7_ can only be used inside g_");
01369     error = -1;
01370     *t++ = -INDEX;
01371     *t++ = -x2;
01372     break;
01373 case TDUBIOUS:
01374     *t++ = -SYMBOL; *t++ = x2; break;
01375 case TFUNCTION:
01376     *t++ = -x2-FUNCTION;
01377     break;
01378 case TSET:
01379     *t++ = -SETSET;
01380     *t++ = x2;
01381     break;
01382 case TWILDARG:
01383     *t++ = -ARGWILD; *t++ = x2; break;
01384 case TSETDOL:
01385     x2 = -x2;
01386     /* fall through */
01387 case TSETNUM:
01388     if ( inset == 0 ) {
01389         w1 = t; t += 2; w2 = t;
01390         while ( w1 > v ) *--w2 = *--w1;
01391         tsize = v; relo = AT.WorkTop;
01392         *v++ = SETSET; *v++ = 0;
01393         inset = 1;
01394     }
01395     *--relo = x2; *--relo = t-v+1;
01396     c = *s++;
01397     x2 = 0; while ( *s >= 0 ) x2 = 128*x2 + *s++;
01398     switch ( c ) {
01399         case TFUNCTION:
01400             (*relo)--; *t++ = -x2-1; break;
01401         case TSYMBOL:
01402             *t++ = -SYMBOL; *t++ = x2; break;
01403         case TINDEX:
01404             *t++ = -INDEX; *t++ = x2;
01405             if ( x2+AM.OffsetIndex > AM.IndDum ) {
01406                 x2 = x2+AM.OffsetIndex - AM.IndDum;
01407                 if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01408             }
01409             break;
01410         case TVECTOR:
01411             *t++ = -VECTOR; *t++ = x2; break;
01412         case TNUMBER1:
01413             *t++ = -SNUMBER; *t++ = x2; break;
01414         default:
01415             MesPrint("&Internal error 435");
01416             error = 1;
01417             *t++ = -SYMBOL; *t++ = x2; break;
01418     }
01419     break;
01420 case TSUBEXP:
01421     w2 = AC.ProtoType; i = w2[1];
01422     w1 = t;
01423     *t++ = i+ARGHEAD+4;
01424     *t++ = 1;
01425     FILLARG(t);
01426     *t++ = i + 4;
01427     while ( --i >= 0 ) *t++ = *w2++;
01428     w1[ARGHEAD+3] = subexpbuffers[x2].subexpnum;
01429     w1[ARGHEAD+5] = subexpbuffers[x2].buffernum;

```

```

01430             if ( sumlevel > 0 ) {
01431                 w1[0] += 4;
01432                 w1[ARGHEAD] += 4;
01433                 w1[ARGHEAD+2] += 4;
01434                 *t++ = sumtype; *t++ = 4;
01435                 *t++ = sumlevel; *t++ = sumlevel;
01436             }
01437             *t++ = 1; *t++ = 1;
01438             if ( minus ) *t++ = -3;
01439             else *t++ = 3;
01440             break;
01441         case TNUMBER:
01442         case TNUMBER1:
01443             if ( minus ) x2 = UnsignedToInt(-IntAbs(x2));
01444             *t++ = -SNUMBER;
01445             *t++ = x2;
01446             break;
01447         default:
01448             MesPrint("&Illegal object in function");
01449             error = -1;
01450             break;
01451     }
01452     } while ( *s == TCOMMA );
01453 }
01454 if ( *s != TFUNCLOSE ) {
01455     MesPrint("&Illegal argument field for function. Expected ");
01456     return(-1);
01457 }
01458 s++; sumlevel = 0;
01459 v[1] = t-v;
01460 /*
01461     if ( *v == AM.termfunnum && ( v[1] != FUNHEAD+2 ||
01462     v[FUNHEAD] != -DOLLAREXPRESSION ) ) {
01463         MesPrint("&The function term_ can only have one argument with a single
01464         $-expression");
01465         error = 1;
01466     }
01467 */
01468     goto fin;
01469 case TDUBIOUS:
01470     x1 = 0; while ( *s >= 0 ) x1 = 128*x1 + *s++;
01471     if ( *s == TWILDCARD ) s++;
01472     if ( *s == TDOT ) goto dovector;
01473     if ( *s == TFUNOPEN ) {
01474         x1 += FUNCTION;
01475         cc = 1;
01476         v = t; *t++ = x1; *t++ = FUNHEAD; *t++ = DIRTYFLAG;
01477         if ( x1 == AR.PolyFun && AR.PolyFunType == 2 && AR.Eside != LHSIDE )
01478             t[-1] |= MUSTCLEANPRF;
01479         FILLFUN3(t);
01480         needarg = -1; goto dofunction;
01481     }
01482     *t++ = SYMBOL; *t++ = 4; *t++ = 0;
01483     if ( inset ) *relo = 2;
01484     goto TryPower;
01485 case TSUBEXP:
01486     x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
01487     if ( *s == TPOWER ) {
01488         s++; c = *s++;
01489         base = ( c == TNUMBER ) ? 100: 128;
01490         x2 = 0; while ( *s >= 0 ) { x2 = base*x2 + *s++; }
01491         if ( *s == TWILDCARD ) { x2 += 2*MAXPOWER; s++; }
01492         else if ( c == TSYMBOL ) x2 += 2*MAXPOWER;
01493     }
01494     else x2 = 1;
01495     r = AC.ProtoType; n = r[1] - 5; r += 5;
01496     *t++ = SUBEXPRESSION; *t++ = r[-4];
01497     *t++ = subexpbuffers[x1].subexpnum;
01498     *t++ = x2*deno;
01499     *t++ = subexpbuffers[x1].buffernum;
01500     NCOPY(t,r,n);
01501     if ( cbuf[subexpbuffers[x1].buffernum].CanCommu[subexpbuffers[x1].subexpnum] ) cc = 1;
01502     deno = 1;
01503     break;
01504 case TMULTIPLY:
01505     mulflag = 1;
01506     break;
01507 case TDIVIDE:
01508     mulflag = 1;
01509     deno = -deno;
01510     break;
01511 case TEXPRESSION:
01512     cc = 1;
01513     x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
01514     v = t;
01515     *t++ = EXPRESSION; *t++ = SUBEXPSIZE; *t++ = x1; *t++ = deno;
01516     *t++ = 0; FILLSUB(t)

```

```

01516  /*
01517  Here we had some erroneous code before. It should be after
01518  the reading of the parameters as it is now (after 15-jan-2007).
01519  Thomas Hahn noticed this and reported it.
01520  */
01521  if ( *s == TFUNOPEN ) {
01522      do {
01523          s++; c = *s++;
01524          base = ( c == TNUMBER ) ? 100: 128;
01525          x2 = 0; while ( *s >= 0 ) { x2 = base*x2 + *s++; }
01526          switch ( c ) {
01527              case TSYMBOL:
01528                  *t++ = SYMBOL; *t++ = 4; *t++ = x2; *t++ = 1;
01529                  break;
01530              case TINDEX:
01531                  *t++ = INDEX; *t++ = 3; *t++ = x2+AM.OffsetIndex;
01532                  if ( t[-1] > AM.IndDum ) {
01533                      x2 = t[-1] - AM.IndDum;
01534                      if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01535                  }
01536                  break;
01537              case TVECTOR:
01538                  *t++ = INDEX; *t++ = 3; *t++ = x2+AM.OffsetVector;
01539                  break;
01540              case TFUNCTION:
01541                  *t++ = x2+FUNCTION; *t++ = 2; break;
01542              case TNUMBER:
01543              case TNUMBER1:
01544                  if ( x2 >= AM.OffsetIndex || x2 < 0 ) {
01545                      MesPrint("&Index as argument of expression has illegal value");
01546                      error = -1;
01547                  }
01548                  *t++ = INDEX; *t++ = 3; *t++ = x2; break;
01549              case TSETDOL:
01550                  x2 = -x2;
01551                  /* fall through */
01552              case TSETNUM:
01553                  if ( inset == 0 ) {
01554                      w1 = t; t += 2; w2 = t;
01555                      while ( w1 > v ) *--w2 = *--w1;
01556                      tsize = v; relo = AT.WorkTop;
01557                      *v++ = SETSET; *v++ = 0;
01558                      inset = 1;
01559                  }
01560                  *--relo = x2; *--relo = t-v+2;
01561                  c = *s++;
01562                  x2 = 0; while ( *s >= 0 ) x2 = 128*x2 + *s++;
01563                  switch ( c ) {
01564                      case TFUNCTION:
01565                          *relo -= 2; *t++ = -x2-1; break;
01566                      case TSYMBOL:
01567                          *t++ = SYMBOL; *t++ = 4; *t++ = x2; *t++ = 1; break;
01568                      case TINDEX:
01569                          *t++ = INDEX; *t++ = 3; *t++ = x2;
01570                          if ( x2+AM.OffsetIndex > AM.IndDum ) {
01571                              x2 = x2+AM.OffsetIndex - AM.IndDum;
01572                              if ( x2 > C->numdum[numexp] ) C->numdum[numexp] = x2;
01573                          }
01574                          break;
01575                      case TVECTOR:
01576                          *t++ = VECTOR; *t++ = 3; *t++ = x2; break;
01577                      case TNUMBER1:
01578                          *t++ = SNUMBER; *t++ = 4; *t++ = x2; *t++ = 1; break;
01579                      default:
01580                          MesPrint("&Internal error 435");
01581                          error = 1;
01582                          *t++ = SYMBOL; *t++ = 4; *t++ = x2; *t++ = 1; break;
01583                  }
01584                  break;
01585              default:
01586                  MesPrint("&Argument of expression can only be symbol, index, vector or
function");
01587                  error = -1;
01588                  break;
01589          }
01590      } while ( *s == TCOMMA );
01591      if ( *s != TFUNCLOSE ) {
01592          MesPrint("&Illegal object in argument field for expression");
01593          error = -1;
01594          while ( *s != TFUNCLOSE ) s++;
01595      }
01596      s++;
01597  }
01598  r = AC.ProtoType; n = r[1];
01599  if ( n > SUBEXPSIZE ) {
01600      *t++ = WILDCARDS; *t++ = n+2;
01601      NCOPY(t,r,n);

```

```

01602     }
01603  /*
01604     Code added for parallel processing.
01605     This is different from the other occurrences to test immediately
01606     for renumbering. Here we have to read the parameters first.
01607  */
01608     if ( Expressions[x1].status == STOREDEXPRESSION ) {
01609         v[1] = t-v;
01610         AT.TMaddr = v;
01611         PUTZERO(position);
01612  /*
01613         if ( (
01614 #ifdef WITHPTHREADS
01615             renumber =
01616 #endif
01617             GetTable(x1,&position,0) ) == 0 ) {
01618         error = 1;
01619         MesPrint("&Problems getting information about stored expression %s(3)"
01620             ,EXPRNAME(x1));
01621     }
01622 #ifdef WITHPTHREADS
01623     M_free(renumber->symb.lo,"VarSpace");
01624     M_free(renumber,"Renummer");
01625 #endif
01626  */
01627     if ( ( renumber = GetTable(x1,&position,0) ) == 0 ) {
01628         error = 1;
01629         MesPrint("&Problems getting information about stored expression %s(3)"
01630             ,EXPRNAME(x1));
01631     }
01632     if ( renumber->symb.lo != AN.dummyrenumlist )
01633         M_free(renumber->symb.lo,"VarSpace");
01634     M_free(renumber,"Renummer");
01635     AR.StoreData.dirtyflag = 1;
01636 }
01637 if ( *s == LBRACE ) {
01638  /*
01639     This should be one term that should be inserted
01640     FROMBRAC size+2 ( term )
01641     Because this term should have been translated
01642     already we can copy it from the 'subexpression'
01643  */
01644     s++;
01645     if ( *s != TSUBEXP ) {
01646         MesPrint("&Internal error 23");
01647         Terminate(-1);
01648     }
01649     s++; x2 = 0; while ( *s >= 0 ) { x2 = 128*x2 + *s++; }
01650     r = cbuf[subexpbuffers[x2].buffernum].rhs[subexpbuffers[x2].subexpnum];
01651     *t++ = FROMBRAC; *t++ = *r+2;
01652     n = *r;
01653     NCOPY(t,r,n);
01654     if ( *r != 0 ) {
01655         MesPrint("&Object between [] in expression should be a single term");
01656         error = -1;
01657     }
01658     if ( *s != RBRACE ) {
01659         MesPrint("&Internal error 23b");
01660         Terminate(-1);
01661     }
01662     s++;
01663 }
01664 if ( *s == TPOWER ) {
01665     s++; c = *s++;
01666     base = ( c == TNUMBER ) ? 100: 128;
01667     x2 = 0; while ( *s >= 0 ) { x2 = base*x2 + *s++; }
01668     if ( *s == TWILDCARD || c == TSYMBOL ) { x2 += 2*MAXPOWER; s++; }
01669     v[3] = x2;
01670 }
01671 v[1] = t - v;
01672 deno = 1;
01673 break;
01674 case TNUMBER:
01675     if ( *s == 0 ) {
01676         s++;
01677         if ( *s == TPOWER ) {
01678             s++; if ( *s == TMINUS ) { s++; deno = -deno; }
01679             c = *s++; base = ( c == TNUMBER ) ? 100: 128;
01680             x2 = 0; while ( *s >= 0 ) { x2 = x2*base + *s++; }
01681             if ( x2 == 0 ) {
01682                 error = -1;
01683                 MesPrint("&Encountered 0^0 during compilation");
01684             }
01685             if ( deno < 0 ) {
01686                 error = -1;
01687                 MesPrint("&Division by zero during compilation (0 to the power negative
number)");

```

```

01688     }
01689     }
01690     else if ( deno < 0 ) {
01691         error = -1;
01692         MesPrint("&Division by zero during compilation");
01693     }
01694     sign = 0; break; /* term is zero */
01695 }
01696 y = *s++;
01697 if ( *s >= 0 ) { y = 100*y + *s++; }
01698 innum[0] = y; nin = 1;
01699 while ( *s >= 0 ) {
01700     y = *s++; x2 = 100;
01701     if ( *s >= 0 ) { y = 100*y + *s++; x2 = 10000; }
01702     Product(innum,&nin,(WORD)x2);
01703     if ( y ) AddLong(innum,nin,(UWORD *)(&y),(WORD)1,innum,&nin);
01704 }
01705 docoef:
01706 if ( *s == TPOWER ) {
01707     s++; if ( *s == TMINUS ) { s++; deno = -deno; }
01708     c = *s++; base = ( c == TNUMBER ) ? 100: 128;
01709     x2 = 0; while ( *s >= 0 ) { x2 = x2*base + *s++; }
01710     if ( x2 == 0 ) {
01711         innum[0] = 1; nin = 1;
01712     }
01713     else if ( RaisPow(BHEAD innum,&nin,x2) ) {
01714         error = -1; innum[0] = 1; nin = 1;
01715     }
01716 }
01717 if ( deno > 0 ) {
01718     Simplify(BHEAD innum,&nin,denominator,&ndenominator);
01719     for ( i = 0; i < nnumerator; i++ ) CGscrat7[i] = numerator[i];
01720     MulLong(innum,nin,CGscrat7,nnumerator,numerator,&nnumerator);
01721 }
01722 else if ( deno < 0 ) {
01723     Simplify(BHEAD innum,&nin,numerator,&nnumerator);
01724     for ( i = 0; i < ndenominator; i++ ) CGscrat7[i] = denominator[i];
01725     MulLong(innum,nin,CGscrat7,ndenominator,denominator,&ndenominator);
01726 }
01727 deno = 1;
01728 break;
01729 case TNUMBER1:
01730     if ( *s == 0 ) { s++; sign = 0; break; /* term is zero */ }
01731     y = *s++;
01732     if ( *s >= 0 ) { y = 128*y + *s++; }
01733     if ( inset == 0 ) {
01734         innum[0] = y; nin = 1;
01735         while ( *s >= 0 ) {
01736             y = *s++; x2 = 128;
01737             if ( *s >= 0 ) { y = 128*y + *s++; x2 = 16384; }
01738             Product(innum,&nin,(WORD)x2);
01739             if ( y ) AddLong(innum,nin,(UWORD *)(&y),(WORD)1,innum,&nin);
01740         }
01741         goto docoef;
01742     }
01743     *relo = 2; *t++ = SNUMBER; *t++ = 4; *t++ = y;
01744     goto TryPower;
01745 #ifdef WITHFLOAT
01746 case TFLOAT:
01747     { WORD *w;
01748       s = ReadFloat(s);
01749       i = AT.WorkPointer[1];
01750       w = AT.WorkPointer;
01751       NCOPY(t,w,i);
01752     }
01753     /*
01754     */
01755     }
01756     break;
01757 #endif
01758 case TDOLLAR:
01759     {
01760         WORD *powplace;
01761         x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
01762         if ( AR.Eside != LHSIDE ) {
01763             *t++ = SUBEXPRESSION; *t++ = SUBEXPSIZE; *t++ = x1;
01764         }
01765         else {
01766             *t++ = DOLLAREXPRESSION; *t++ = SUBEXPSIZE; *t++ = x1;
01767         }
01768         powplace = t; t++;
01769         *t++ = AM.dbufnum; FILLSUB(t)
01770     }
01771     /*
01772     */
01773     Now we have to test for factors of dollars with [ ] and [ [ ] ]
01774     if ( *s == LBRACE ) {
01775         int bracelevel = 1;

```

```

01775         s++;
01776     while ( bracelevel > 0 ) {
01777         if ( *s == RBRACE ) {
01778             bracelevel--; s++;
01779         }
01780         else if ( *s == TNUMBER ) {
01781             s++;
01782             x2 = 0; while ( *s >= 0 ) { x2 = 100*x2 + *s++; }
01783             *t++ = DOLLAREXPR2; *t++ = 3; *t++ = -x2-1;
01784 CloseBraces:
01785             while ( bracelevel > 0 ) {
01786                 if ( *s != RBRACE ) {
01787 ErrorBraces:
01788                     error = -1;
01789                     MesPrint("&Improper use of [] in $-variable.");
01790                     return(error);
01791                 }
01792                 else {
01793                     s++; bracelevel--;
01794                 }
01795             }
01796         }
01797         else if ( *s == TDOLLAR ) {
01798             s++;
01799             x1 = 0; while ( *s >= 0 ) { x1 = x1*128 + *s++; }
01800             *t++ = DOLLAREXPR2; *t++ = 3; *t++ = x1;
01801             if ( *s == RBRACE ) goto CloseBraces;
01802             else if ( *s == LBRACE ) {
01803                 s++; bracelevel++;
01804             }
01805         }
01806         else goto ErrorBraces;
01807     }
01808 }
01809 /*
01810     Finally we can continue with the power
01811 */
01812 if ( *s == TPOWER ) {
01813     s++;
01814     if ( *s == TMINUS ) { s++; deno = -deno; }
01815     c = *s++;
01816     base = ( c == TNUMBER ) ? 100: 128;
01817     x2 = 0; while ( *s >= 0 ) { x2 = base*x2 + *s++; }
01818     if ( c == TSYMBOL ) {
01819         if ( *s == TWILDCARD ) s++;
01820         x2 += 2*MAXPOWER;
01821     }
01822     *powplace = deno*x2;
01823 }
01824 else *powplace = deno;
01825 deno = 1;
01826 /*
01827     if ( inset ) {
01828         while ( relo < AT.WorkTop ) *t++ = *relo++;
01829         inset = 0; tsize[1] = t - tsize;
01830     }
01831 */
01832 }
01833 break;
01834 case TSETNUM:
01835     inset = 1; tsize = t; relo = AT.WorkTop;
01836     *t++ = SETSET; *t++ = 0;
01837     x1 = 0; while ( *s >= 0 ) x1 = x1*128 + *s++;
01838     *---relo = x1; *---relo = 0;
01839     break;
01840 case TSETDOL:
01841     inset = 1; tsize = t; relo = AT.WorkTop;
01842     *t++ = SETSET; *t++ = 0;
01843     x1 = 0; while ( *s >= 0 ) x1 = x1*128 + *s++;
01844     *---relo = -x1; *---relo = 0;
01845     break;
01846 case TFUNOPEN:
01847     MesPrint("&Illegal use of function arguments");
01848     error = -1;
01849     funflag = 1;
01850     deno = 1;
01851     break;
01852 case TFUNCLOSE:
01853     if ( funflag == 0 )
01854         MesPrint("&Illegal use of function arguments");
01855     error = -1;
01856     funflag = 0;
01857     deno = 1;
01858     break;
01859 case TSGAMMA:
01860     MesPrint("&Illegal use special gamma symbols 5_, 6_, 7_");
01861     error = -1;

```

```

01862         funflag = 0;
01863         deno = 1;
01864         break;
01865     case TCONJUGATE:
01866         MesPrint("&Complex conjugate operator (%#) is not implemented");
01867         error = -1;
01868         deno = 1;
01869         break;
01870     default:
01871         MesPrint("&Internal error in code generator. Unknown object: %d",c);
01872         error = -1;
01873         deno = 1;
01874         break;
01875     }
01876 }
01877 }
01878 if ( mulflag ) {
01879     MesPrint("&Irregular end of statement.");
01880     error = 1;
01881 }
01882 if ( !first && error == 0 ) {
01883     *term = t-term;
01884     C->NumTerms[numexp]++;
01885     if ( cc && sign ) C->CanCommu[numexp]++;
01886     error = CompleteTerm(term,numerator,denominator,nnumerator,ndenominator,sign);
01887 }
01888 AT.WorkPointer = oldwork;
01889 if ( error ) return(-1);
01890 AddToCB(C,0)
01891 if ( AC.CompileLevel > 0 && AR.Eside != LHSIDE ) {
01892     /* See whether we have this one already */
01893     error = InsTree(AC.cbufnum,C->numrhs);
01894     if ( error < (C->numrhs) ) {
01895         C->Pointer = C->rhs[C->numrhs--];
01896         return(error);
01897     }
01898 }
01899 return(C->numrhs);
01900 OverWork:
01901 MLOCK(ErrorMessageLock);
01902 MesWork();
01903 MUNLOCK(ErrorMessageLock);
01904 return(-1);
01905 }
01906
01907 /*
01908     #] CodeGenerator :
01909     #[ CompleteTerm :
01910
01911     Completes the term
01912     Puts it in the buffer
01913 */
01914
01915 int CompleteTerm(WORD *term, UWORD *number, UWORD *denom, WORD nnum, WORD nden, int sign)
01916 {
01917     int nsize, i;
01918     WORD *t;
01919     if ( sign == 0 ) return(0); /* Term is zero */
01920     if ( nnum >= nden ) nsize = nnum;
01921     else nsize = nden;
01922     t = term + *term;
01923     for ( i = 0; i < nnum; i++ ) *t++ = number[i];
01924     for ( ; i < nsize; i++ ) *t++ = 0;
01925     for ( i = 0; i < nden; i++ ) *t++ = denom[i];
01926     for ( ; i < nsize; i++ ) *t++ = 0;
01927     *t++ = (2*nsize+1)*sign;
01928     *term = t - term;
01929     AddNtoC(AC.cbufnum,*term,term,7);
01930     return(0);
01931 }
01932
01933 /*
01934     #] CompleteTerm :
01935     #[ CodeFactors :
01936
01937     This routine does the part of reading in in terms of factors.
01938     If there is more than one term at this level we have only one
01939     factor. In that case any expression should first be unfactorized.
01940     Then the whole expression gets read as a new subexpression and finally
01941     we generate factor_*subexpression.
01942     If the whole has only multiplications we have factors. Then the
01943     nasty thing is powers of objects and in particular powers of
01944     factorized expressions or dollars.
01945     For a power we generate a new subexpression of the type
01946     1+factor_+...+factor_^(power-1)
01947     with which we multiply.
01948

```

```

01949         WE HAVE NOT YET WORRIED ABOUT SETS
01950 */
01951
01952 int CodeFactors(SBYTE *tokens)
01953 {
01954     GETIDENTITY
01955     EXPRESSIONS e = Expressions + AR.CurExpr;
01956     int nfactor = 1, nparenthesis, i, last = 0, error = 0;
01957     SBYTE *t, *startobject, *tt, *sl, *out, *outtokens;
01958     WORD nexpt, subexp = 0, power, pow, x2, powfactor, first;
01959 /*
01960     First scan the number of factors
01961 */
01962     t = tokens;
01963     while ( *t != TENDOFIT ) {
01964         if ( *t >= 0 ) { while ( *t >= 0 ) t++; continue; }
01965         if ( *t == LPARENTHESIS || *t == LBRACE || *t == TSETOPEN || *t == TFUNOPEN ) {
01966             nparenthesis = 0; t++;
01967             while ( nparenthesis >= 0 ) {
01968                 if ( *t == LPARENTHESIS || *t == LBRACE || *t == TSETOPEN || *t == TFUNOPEN )
01969                     nparenthesis++;
01970                 else if ( *t == RPARENTHESIS || *t == RBRACE || *t == TSETCLOSE || *t == TFUNCLOSE )
01971                     nparenthesis--;
01972                 t++;
01973             }
01974             continue;
01975         }
01976         else if ( ( *t == TPLUS || *t == TMINUS ) && ( t > tokens )
01977             && ( t[-1] != TPLUS && t[-1] != TMINUS ) ) {
01978             if ( t[-1] >= 0 || t[-1] == RPARENTHESIS || t[-1] == RBRACE
01979                 || t[-1] == TSETCLOSE || t[-1] == TFUNCLOSE ) {
01980                 subexp = CodeGenerator(tokens);
01981                 if ( subexp < 0 ) error = -1;
01982                 if ( insubexpbuffers >= MAXSUBEXPRESSIONS ) {
01983                     MesPrint("More than %d subexpressions inside one
01984 expression", (WORD)MAXSUBEXPRESSIONS);
01985                     Terminate(-1);
01986                 }
01987                 if ( subexpbuffers+insubexpbuffers >= topsubexpbuffers ) {
01988                     DoubleBuffer((void **) ((void *)(&subexpbuffers))
01989                         , (void **) ((void *)(&topsubexpbuffers)), sizeof(SUBBUF), "subexpbuffers");
01990                 }
01991                 subexpbuffers[insubexpbuffers].subexpnum = subexp;
01992                 subexpbuffers[insubexpbuffers].buffernum = AC.cbufnum;
01993                 subexp = insubexpbuffers++;
01994                 t = tokens;
01995                 *t++ = TSYMBOL; *t++ = FACTORSYMBOL;
01996                 *t++ = TMULTIPLY; *t++ = TSUBEXP;
01997                 PUTNUMBER128(t, subexp)
01998                 *t++ = TENDOFIT;
01999                 e->numfactors = 1;
02000                 e->vflags |= ISFACTORIZED;
02001                 return(subexp);
02002             }
02003         }
02004         else if ( ( *t == TMULTIPLY || *t == TDIVIDE ) && t > tokens ) {
02005             nfactor++;
02006         }
02007         else if ( *t == TEXPRESSION ) {
02008             t++;
02009             nexpt = 0; while ( *t >= 0 ) { nexpt = nexpt*128 + *t++; }
02010             if ( *t == LBRACE ) continue;
02011             if ( ( AS.Oldvflags[nexpt] & ISFACTORIZED ) != 0 ) {
02012                 nfactor += AS.OldNumFactors[nexpt];
02013             }
02014             else { nfactor++; }
02015             continue;
02016         }
02017         else if ( *t == TDOLLAR ) {
02018             t++;
02019             nexpt = 0; while ( *t >= 0 ) { nexpt = nexpt*128 + *t++; }
02020             if ( *t == LBRACE ) continue;
02021             if ( Dollars[nexpt].nfactors > 0 ) {
02022                 nfactor += Dollars[nexpt].nfactors;
02023             }
02024             else { nfactor++; }
02025             continue;
02026         }
02027     }
02028     t++;
02029 }
02030 /*
02031     Now the real pass.
02032     nfactor is a not so reliable measure for the space we need.
02033 */
02034     outtokens = (SBYTE *)Mallc1(((t-tokens)+(nfactor+2)*25)*sizeof(SBYTE), "CodeFactors");
02035     out = outtokens;
02036     t = tokens; first = 1; powfactor = 1;

```



```

02033     while ( *t == TPLUS || *t == TMINUS ) { if ( *t == TMINUS ) first = -first; t++; }
02034     if ( first < 0 ) {
02035         *out++ = TMINUS; *out++ = TSYMBOL; *out++ = FACTORSYMBOL;
02036         *out++ = TPOWER; *out++ = TNUMBER; PUTNUMBER100(out,powfactor)
02037         powfactor++;
02038     }
02039     startobject = t; power = 1;
02040     while ( *t != TENDOFIT ) {
02041         if ( *t >= 0 ) { while ( *t >= 0 ) t++; continue; }
02042         if ( *t == LPARENTHESIS || *t == LBRACE || *t == TSETOPEN || *t == TFUNOPEN ) {
02043             nparenthesis = 0; t++;
02044             while ( nparenthesis >= 0 ) {
02045                 if ( *t == LPARENTHESIS || *t == LBRACE || *t == TSETOPEN || *t == TFUNOPEN )
02046                     nparenthesis++;
02047                 else if ( *t == RPARENTHESIS || *t == RBRACE || *t == TSETCLOSE || *t == TFUNCLOSE )
02048                     nparenthesis--;
02049                 t++;
02050             }
02051             continue;
02052         } else if ( ( *t == TMULTIPLY || *t == TDIVIDE ) && ( t > tokens ) ) {
02053             if ( t[-1] >= 0 || t[-1] == RPARENTHESIS || t[-1] == RBRACE
02054                 || t[-1] == TSETCLOSE || t[-1] == TFUNCLOSE ) {
02055 dolast:
02056                 if ( startobject ) { /* apparently power is 1 or -1 */
02057                     *out++ = TPLUS;
02058                     if ( power < 0 ) { *out++ = TNUMBER; *out++ = 1; *out++ = TDIVIDE; }
02059                     s1 = startobject;
02060                     while ( s1 < t ) *out++ = *s1++;
02061                     *out++ = TMULTIPLY; *out++ = TSYMBOL; *out++ = FACTORSYMBOL;
02062                     *out++ = TPOWER; *out++ = TNUMBER; PUTNUMBER100(out,powfactor)
02063                     powfactor++;
02064                 }
02065                 if ( last ) { startobject = 0; break; }
02066                 startobject = t+1;
02067                 if ( *t == TDIVIDE ) power = -1;
02068                 if ( *t == TMULTIPLY ) power = 1;
02069             }
02070             else if ( *t == TPOWER ) {
02071                 pow = 1;
02072                 tt = t+1;
02073                 while ( ( *tt == TMINUS ) || ( *tt == TPLUS ) ) {
02074                     if ( *tt == TMINUS ) pow = -pow;
02075                     tt++;
02076                 }
02077                 if ( *tt == TSYMBOL ) {
02078                     tt++; while ( *tt >= 0 ) tt++;
02079                     t = tt; continue;
02080                 }
02081                 tt++; x2 = 0; while ( *tt >= 0 ) { x2 = 100*x2 + *tt++; }
02082             /*
02083             We have an object in startobject till t. The power is
02084             power*pow*x2
02085             */
02086             power = power*pow*x2;
02087             if ( power < 0 ) { pow = -power; power = -1; }
02088             else if ( power == 0 ) { t = tt; startobject = tt; continue; }
02089             else { pow = power; power = 1; }
02090             *out++ = TPLUS;
02091             if ( pow > 1 ) {
02092                 subexp = GenerateFactors(pow,1);
02093                 if ( subexp < 0 ) { error = -1; subexp = 0; }
02094                 *out++ = TSUBEXP; PUTNUMBER128(out,subexp);
02095             }
02096             *out++ = TSYMBOL; *out++ = FACTORSYMBOL;
02097             *out++ = TPOWER; *out++ = TNUMBER; PUTNUMBER100(out,powfactor)
02098             powfactor += pow;
02099             if ( power > 0 ) *out++ = TMULTIPLY;
02100             else *out++ = TDIVIDE;
02101             s1 = startobject; while ( s1 < t ) *out++ = *s1++;
02102             startobject = 0; t = tt; continue;
02103         }
02104         else if ( *t == TEXPRESSSION ) {
02105             startobject = t;
02106             t++;
02107             nexp = 0; while ( *t >= 0 ) { nexp = nexp*128 + *t++; }
02108             if ( *t == LBRACE ) continue;
02109             if ( *t == LPARENTHESIS ) {
02110                 nparenthesis = 0; t++;
02111                 while ( nparenthesis >= 0 ) {
02112                     if ( *t == LPARENTHESIS ) nparenthesis++;
02113                     else if ( *t == RPARENTHESIS ) nparenthesis--;
02114                     t++;
02115                 }
02116             }
02117             if ( ( AS.Oldvflags[nexp] & ISFACTORIZED ) == 0 ) continue;

```

```

02118         if ( *t == TPOWER ) {
02119             pow = 1;
02120             tt = t+1;
02121             while ( ( *tt == TMINUS ) || ( *tt == TPLUS ) ) {
02122                 if ( *tt == TMINUS ) pow = -pow;
02123                 tt++;
02124             }
02125             if ( *tt != TNUMBER ) {
02126                 MesPrint("Internal problems(1) in CodeFactors");
02127                 return(-1);
02128             }
02129             tt++; x2 = 0; while ( *tt >= 0 ) { x2 = 100*x2 + *tt++; }
02130 /*
02131     We have an object in startobject till t. The power is
02132     power*pow*x2
02133 */
02134 dopower:
02135     power = power*pow*x2;
02136     if ( power < 0 ) { pow = -power; power = -1; }
02137     else if ( power == 0 ) { t = tt; startobject = tt; continue; }
02138     else { pow = power; power = 1; }
02139     *out++ = TPLUS;
02140     if ( pow > 1 ) {
02141         subexp = GenerateFactors(pow,AS.OldNumFactors[nexp]);
02142         if ( subexp < 0 ) { error = -1; subexp = 0; }
02143         *out++ = TSUBEXP; PUTNUMBER128(out,subexp)
02144         *out++ = TMULTIPLY;
02145     }
02146     i = powfactor-1;
02147     if ( i > 0 ) {
02148         *out++ = TSYMBOL; *out++ = FACTORSYMBOL;
02149         if ( i > 1 ) {
02150             *out++ = TPOWER; *out++ = TNUMBER; PUTNUMBER100(out,i)
02151         }
02152         *out++ = TMULTIPLY;
02153     }
02154     powfactor += AS.OldNumFactors[nexp]*pow;
02155     s1 = startobject;
02156     while ( s1 < t ) *out++ = *s1++;
02157     startobject = 0; t = tt; continue;
02158 }
02159 else {
02160     tt = t; pow = 1; x2 = 1; goto dopower;
02161 }
02162 }
02163 else if ( *t == TDOLLAR ) {
02164     startobject = t;
02165     t++;
02166     nexp = 0; while ( *t >= 0 ) { nexp = nexp*128 + *t++; }
02167     if ( *t == LBRACE ) continue;
02168     if ( Dollars[nexp].nfactors == 0 ) continue;
02169     if ( *t == TPOWER ) {
02170         pow = 1;
02171         tt = t+1;
02172         while ( ( *tt == TMINUS ) || ( *tt == TPLUS ) ) {
02173             if ( *tt == TMINUS ) pow = -pow;
02174             tt++;
02175         }
02176         if ( *tt != TNUMBER ) {
02177             MesPrint("Internal problems(2) in CodeFactors");
02178             return(-1);
02179         }
02180         tt++; x2 = 0; while ( *tt >= 0 ) { x2 = 100*x2 + *tt++; }
02181 /*
02182     We have an object in startobject till t. The power is
02183     power*pow*x2
02184 */
02185 dopowerd:
02186     power = power*pow*x2;
02187     if ( power < 0 ) { pow = -power; power = -1; }
02188     else if ( power == 0 ) { t = tt; startobject = tt; continue; }
02189     else { pow = power; power = 1; }
02190     if ( pow > 1 ) {
02191         subexp = GenerateFactors(pow,1);
02192         if ( subexp < 0 ) { error = -1; subexp = 0; }
02193     }
02194     for ( i = 1; i <= Dollars[nexp].nfactors; i++ ) {
02195         s1 = startobject; *out++ = TPLUS;
02196         while ( s1 < t ) *out++ = *s1++;
02197         *out++ = LBRACE; *out++ = TNUMBER; PUTNUMBER128(out,i)
02198         *out++ = RBRACE;
02199         *out++ = TMULTIPLY;
02200         *out++ = TSYMBOL; *out++ = FACTORSYMBOL;
02201         *out++ = TPOWER; *out++ = TNUMBER; PUTNUMBER100(out,powfactor)
02202         powfactor += pow;
02203         if ( pow > 1 ) {
02204             *out++ = TSUBEXP; PUTNUMBER128(out,subexp)

```

```


02205         }
02206     }
02207     startobject = 0; t = tt; continue;
02208 }
02209 else {
02210     tt = t; pow = 1; x2 = 1; goto dopowerd;
02211 }
02212 }
02213 t++;
02214 }
02215 if ( last == 0 ) { last = 1; goto dolast; }
02216 *out = TENDOFIT;
02217 e->numfactors = powfactor-1;
02218 e->vflags |= ISFACTORIZED;
02219 subexp = CodeGenerator(outtokens);
02220 if ( subexp < 0 ) error = -1;
02221 if ( insubexpbuffers >= MAXSUBEXPRESSIONS ) {
02222     MesPrint("%More than %d subexpressions inside one expression", (WORD)MAXSUBEXPRESSIONS);
02223     Terminate(-1);
02224 }
02225 if ( subexpbuffers+insubexpbuffers >= topsubexpbuffers ) {
02226     DoubleBuffer((void **)((void *)(&subexpbuffers))
02227         , (void **)((void *)(&topsubexpbuffers)), sizeof(SUBBUF), "subexpbuffers");
02228 }
02229 subexpbuffers[insubexpbuffers].subexpnum = subexp;
02230 subexpbuffers[insubexpbuffers].buffernum = AC.cbufnum;
02231 subexp = insubexpbuffers++;
02232 M_free(outtokens, "CodeFactors");
02233 s1 = tokens;
02234 *s1++ = TSUBEXP; PUTNUMBER128(s1, subexp); *s1++ = TENDOFIT;
02235 if ( error < 0 ) return(-1);
02236 else return(subexp);
02237 }
02238
02239 /*
02240     #] CodeFactors :
02241     #[ GenerateFactors :
02242
02243     Generates an expression of the type
02244     1+factor_+factor_^2+...+factor_^(n-1)
02245     (this is if inc=1)
02246     Returns the subexpression pointer of it.
02247 */
02248
02249 WORD GenerateFactors(WORD n, WORD inc)
02250 {
02251     int subexp;
02252     int i, error = 0;
02253     SBYTE *s;
02254     SBYTE *tokenbuffer = (SBYTE *)Malloca(8*n*sizeof(SBYTE), "GenerateFactors");
02255     s = tokenbuffer;
02256     *s++ = TNUMBER; *s++ = 1;
02257     for ( i = inc; i < n+inc; i += inc ) {
02258         *s++ = TPLUS; *s++ = TSYMBOL; *s++ = FACTORSYMBOL;
02259         if ( i > 1 ) {
02260             *s++ = TPOWER; *s++ = TNUMBER;
02261             PUTNUMBER100(s, i)
02262         }
02263     }
02264     *s++ = TENDOFIT;
02265     subexp = CodeGenerator(tokenbuffer);
02266     if ( subexp < 0 ) error = -1;
02267     M_free(tokenbuffer, "GenerateFactors");
02268     if ( insubexpbuffers >= MAXSUBEXPRESSIONS ) {
02269         MesPrint("%More than %d subexpressions inside one expression", (WORD)MAXSUBEXPRESSIONS);
02270         Terminate(-1);
02271     }
02272     if ( subexpbuffers+insubexpbuffers >= topsubexpbuffers ) {
02273         DoubleBuffer((void **)((void *)(&subexpbuffers))
02274             , (void **)((void *)(&topsubexpbuffers)), sizeof(SUBBUF), "subexpbuffers");
02275     }
02276     subexpbuffers[insubexpbuffers].subexpnum = subexp;
02277     subexpbuffers[insubexpbuffers].buffernum = AC.cbufnum;
02278     subexp = insubexpbuffers++;
02279     if ( error < 0 ) return(error);
02280     return(subexp);
02281 }
02282
02283 /*
02284     #] GenerateFactors :
02285     #] Compiler :
02286 */

```

4.13 compress.c File Reference

```
#include "form3.h"
```

Include dependency graph for compress.c:

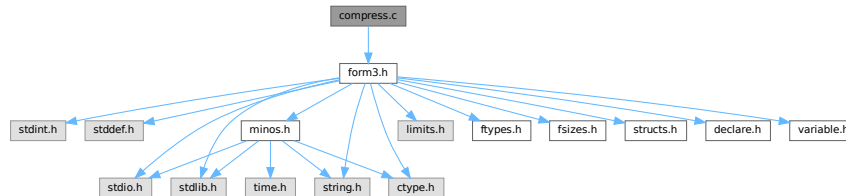

4.13.1 Detailed Description

The routines for the use of gzip (de)compression of the information in the sort file.

Definition in file [compress.c](#).

4.14 compress.c

[Go to the documentation of this file.](#)

```

00001
00007 /* #[] License : */
00008 /*
00009  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00010  * When using this file you are requested to refer to the publication
00011  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00012  * This is considered a matter of courtesy as the development was paid
00013  * for by FOM the Dutch physics granting agency and we would like to
00014  * be able to track its scientific use to convince FOM of its value
00015  * for the community.
00016  *
00017  * This file is part of FORM.
00018  *
00019  * FORM is free software: you can redistribute it and/or modify it under the
00020  * terms of the GNU General Public License as published by the Free Software
00021  * Foundation, either version 3 of the License, or (at your option) any later
00022  * version.
00023  *
00024  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00025  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00026  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00027  * details.
00028  *
00029  * You should have received a copy of the GNU General Public License along
00030  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00031  */
00032 /* #[] License : */
00033
00034 #include "form3.h"
00035
00036 #ifdef WITHZLIB
00037 /*
00038 #define GZIPDEBUG
00039
00040 Low level routines for dealing with zlib during sorting and handling
00041 the scratch files. Work started 5-sep-2005.
00042 The .sor file handling was more or less completed on 8-sep-2005
00043 The handling of the scratch files still needs some thinking.
00044 Complications are:
00045     gzip compression should be per expression, not per buffer.
00046     No gzip compression for expressions with a bracket index.
00047     Separate decompression buffers for expressions in the rhs.

```

```

00048         This last one will involve more buffer work and organization.
00049         Information about compression should be stored for each expr.
00050         (including what method/program was used)
00051     Note: Be careful with compression. By far the most compact method
00052     is the original problem....
00053
00054     #[ Variables :
00055
00056     The following variables are to contain the intermediate buffers
00057     for the inflation of the various patches in the sort file.
00058     There can be up to MaxFpatches (FilePatches in the setup) and hence
00059     we can have that many streams simultaneously. We set this up once
00060     and only when needed.
00061     (in struct A.N or AB[threadnum].N)
00062     Bytef **AN.ziobufnum;
00063     Bytef *AN.ziobuffers;
00064 */
00065
00066 /*
00067     #] Variables :
00068     #[ SetupOutputGZIP :
00069
00070     Routine prepares a gzip output stream for the given file.
00071 */
00072
00073 int SetupOutputGZIP(FILEHANDLE *f)
00074 {
00075     GETIDENTITY
00076
00077     if ( AT.SS != AT.SO ) return(0);
00078     if ( AR.NoCompress == 1 ) return(0);
00079     if ( AR.gzipCompress <= 0 ) return(0);
00080
00081     if ( f->ziobuffer == 0 ) {
00082 /*
00083         1: Allocate a struct for the gzip stream:
00084 */
00085         f->zsp = Malloc1(sizeof(z_stream),"output zstream");
00086 /*
00087         2: Allocate the output buffer.
00088 */
00089         f->ziobuffer =
00090             (Bytef *)Malloc1(f->ziosize*sizeof(char),"output zbuffer");
00091         if ( f->zsp == 0 || f->ziobuffer == 0 ) {
00092             MLOCK(ErrorMessageLock);
00093             MesCall("SetupOutputGZIP");
00094             MUNLOCK(ErrorMessageLock);
00095             Terminate(-1);
00096         }
00097     }
00098 /*
00099     3: Set the default fields:
00100 */
00101     f->zsp->zalloc = Z_NULL;
00102     f->zsp->zfree = Z_NULL;
00103     f->zsp->opaque = Z_NULL;
00104 /*
00105     4: Set the output space:
00106 */
00107     f->zsp->next_out = f->ziobuffer;
00108     f->zsp->avail_out = f->ziosize;
00109     f->zsp->total_out = 0;
00110 /*
00111     5: Set the input space:
00112 */
00113     f->zsp->next_in = (Bytef *) (f->PObuffer);
00114     f->zsp->avail_in = (Bytef *) (f->POfill) - (Bytef *) (f->PObuffer);
00115     f->zsp->total_in = 0;
00116 /*
00117     6: Initiate the deflation
00118 */
00119     if ( deflateInit(f->zsp,AR.gzipCompress) != Z_OK ) {
00120         MLOCK(ErrorMessageLock);
00121         MesPrint("Error from zlib: %s",f->zsp->msg);
00122         MesCall("SetupOutputGZIP");
00123         MUNLOCK(ErrorMessageLock);
00124         Terminate(-1);
00125     }
00126
00127     return(0);
00128 }
00129
00130 /*
00131     #] SetupOutputGZIP :
00132     #[ PutOutputGZIP :
00133
00134     Routine is called when the PObuffer of f is full.

```

```

00135     The contents of it will be compressed and whenever the output buffer
00136     f->ziobuffer is full it will be written and the output buffer
00137     will be reset.
00138     Upon exit the input buffer will be cleared.
00139  */
00140
00141 int PutOutputGZIP(FILEHANDLE *f)
00142 {
00143     GETIDENTITY
00144     int zerror;
00145  /*
00146     First set the number of bytes in the input
00147  */
00148     f->zsp->next_in = (Bytef *) (f->PObuffer);
00149     f->zsp->avail_in = (Bytef *) (f->POfill) - (Bytef *) (f->PObuffer);
00150     f->zsp->total_in = 0;
00151
00152     while ( ( zerror = deflate(f->zsp,Z_NO_FLUSH) ) == Z_OK ) {
00153         if ( f->zsp->avail_out == 0 ) {
00154  /*
00155             ziobuffer is full. Write the output.
00156  */
00157 #ifdef GZIPDEBUG
00158             {
00159                 char *s = (char *) ((UBYTE *) (f->ziobuffer)+f->ziosize);
00160                 MLOCK(ErrorMessageLock);
00161                 MesPrint("%wWriting %l bytes at %10p: %d %d %d %d %d"
00162                     ,f->ziosize,&(f->POposition),s[-5],s[-4],s[-3],s[-2],s[-1]);
00163                 MUNLOCK(ErrorMessageLock);
00164             }
00165 #endif
00166 #ifdef ALLLOCK
00167             LOCK(f->pthreadlock);
00168 #endif
00169             if ( f == AR.hidefile ) {
00170                 LOCK(AS.inputslock);
00171             }
00172             SeekFile(f->handle,&(f->POposition),SEEK_SET);
00173             if ( WriteFile(f->handle,(UBYTE *) (f->ziobuffer),f->ziosize)
00174                 != f->ziosize ) {
00175                 if ( f == AR.hidefile ) {
00176                     UNLOCK(AS.inputslock);
00177                 }
00178 #ifdef ALLLOCK
00179                 UNLOCK(f->pthreadlock);
00180 #endif
00181                 MLOCK(ErrorMessageLock);
00182                 MesPrint("%wWrite error during compressed sort. Disk full?");
00183                 MUNLOCK(ErrorMessageLock);
00184                 return(-1);
00185             }
00186             if ( f == AR.hidefile ) {
00187                 UNLOCK(AS.inputslock);
00188             }
00189 #ifdef ALLLOCK
00190             UNLOCK(f->pthreadlock);
00191 #endif
00192             ADDPOS(f->filesize,f->ziosize);
00193             ADDPOS(f->POposition,f->ziosize);
00194 #ifdef WITHPTHREADS
00195             if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
00196                 if ( f->handle >= 0 ) SynchFile(f->handle);
00197             }
00198 #endif
00199  /*
00200             Reset the output
00201  */
00202             f->zsp->next_out = f->ziobuffer;
00203             f->zsp->avail_out = f->ziosize;
00204             f->zsp->total_out = 0;
00205         }
00206         else if ( f->zsp->avail_in == 0 ) {
00207  /*
00208             We compressed everything and it sits in ziobuffer. Finish
00209  */
00210             return(0);
00211         }
00212         else {
00213             MLOCK(ErrorMessageLock);
00214             MesPrint("%w avail_in = %d, avail_out = %d.",f->zsp->avail_in,f->zsp->avail_out);
00215             MUNLOCK(ErrorMessageLock);
00216             break;
00217         }
00218     }
00219     MLOCK(ErrorMessageLock);
00220     MesPrint("%wError in gzip handling of output. zerror = %d",zerror);
00221     MUNLOCK(ErrorMessageLock);

```

```

00222     return(-1);
00223 }
00224
00225 /*
00226  #] PutOutputGZIP :
00227  #[ FlushOutputGZIP :
00228
00229     Routine is called to flush a stream. The compression of the input buffer
00230     will be completed and the contents of f->ziobuffer will be written.
00231     Both buffers will be cleared.
00232 */
00233
00234 int FlushOutputGZIP(FILEHANDLE *f)
00235 {
00236     GETIDENTITY
00237     int zerror;
00238 /*
00239     Set the proper parameters
00240 */
00241     f->zsp->next_in = (Bytef *) (f->PObuffer);
00242     f->zsp->avail_in = (Bytef *) (f->POfill) - (Bytef *) (f->PObuffer);
00243     f->zsp->total_in = 0;
00244
00245     while ( ( zerror = deflate(f->zsp,Z_FINISH) ) == Z_OK ) {
00246         if ( f->zsp->avail_out == 0 ) {
00247 /*
00248             Write the output
00249 */
00250 #ifdef GZIPDEBUG
00251             MLOCK(ErrorMessageLock);
00252             MesPrint("%wWriting %l bytes at %l0p",f->ziosize,&(f->POposition));
00253             MUNLOCK(ErrorMessageLock);
00254 #endif
00255 #ifdef ALLLOCK
00256             LOCK(f->pthreadlock);
00257 #endif
00258             if ( f == AR.hidefile ) {
00259                 UNLOCK(AS.inputslock);
00260             }
00261             SeekFile(f->handle,&(f->POposition),SEEK_SET);
00262             if ( WriteFile(f->handle,(UBYTE *) (f->ziobuffer),f->ziosize)
00263                 != f->ziosize ) {
00264                 if ( f == AR.hidefile ) {
00265                     UNLOCK(AS.inputslock);
00266                 }
00267 #ifdef ALLLOCK
00268                 UNLOCK(f->pthreadlock);
00269 #endif
00270                 MLOCK(ErrorMessageLock);
00271                 MesPrint("%wWrite error during compressed sort. Disk full?");
00272                 MUNLOCK(ErrorMessageLock);
00273                 return(-1);
00274             }
00275             if ( f == AR.hidefile ) {
00276                 UNLOCK(AS.inputslock);
00277             }
00278 #ifdef ALLLOCK
00279             UNLOCK(f->pthreadlock);
00280 #endif
00281             ADDPOS(f->filesize,f->ziosize);
00282             ADDPOS(f->POposition,f->ziosize);
00283 #ifdef WITHPTHREADS
00284             if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
00285                 if ( f->handle >= 0 ) SynchFile(f->handle);
00286             }
00287 #endif
00288 /*
00289             Reset the output
00290 */
00291             f->zsp->next_out = f->ziobuffer;
00292             f->zsp->avail_out = f->ziosize;
00293             f->zsp->total_out = 0;
00294         }
00295     }
00296     if ( zerror == Z_STREAM_END ) {
00297 /*
00298         Write the output
00299 */
00300 #ifdef GZIPDEBUG
00301             MLOCK(ErrorMessageLock);
00302             MesPrint("%wWriting %l bytes at %l0p", (LONG) (f->zsp->avail_out), &(f->POposition));
00303             MUNLOCK(ErrorMessageLock);
00304 #endif
00305 #ifdef ALLLOCK
00306             LOCK(f->pthreadlock);
00307 #endif
00308             if ( f == AR.hidefile ) {

```

```

00309         LOCK(AS.inputslock);
00310     }
00311     SeekFile(f->handle, &(f->PPosition), SEEK_SET);
00312     if ( WriteFile(f->handle, (UBYTE *) (f->ziobuffer), f->zsp->total_out)
00313         != (LONG) (f->zsp->total_out) ) {
00314         if ( f == AR.hidefile ) {
00315             UNLOCK(AS.inputslock);
00316         }
00317 #ifdef ALLLOCK
00318         UNLOCK(f->pthreadlock);
00319 #endif
00320         MLOCK(ErrorMessageLock);
00321         MesPrint("%wWrite error during compressed sort. Disk full?");
00322         MUNLOCK(ErrorMessageLock);
00323         return(-1);
00324     }
00325     if ( f == AR.hidefile ) {
00326         LOCK(AS.inputslock);
00327     }
00328 #ifdef ALLLOCK
00329     UNLOCK(f->pthreadlock);
00330 #endif
00331     ADDPOS(f->filesize, f->zsp->total_out);
00332     ADDPOS(f->PPosition, f->zsp->total_out);
00333 #ifdef WITHPTHREADS
00334     if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
00335         if ( f->handle >= 0 ) SynchFile(f->handle);
00336     }
00337 #endif
00338 #ifdef GZIPDEBUG
00339     MLOCK(ErrorMessageLock);
00340     { char *s = f->ziobuffer+f->zsp->total_out;
00341       MesPrint("%w Last bytes written: %d %d %d %d", s[-5], s[-4], s[-3], s[-2], s[-1]);
00342     }
00343     MesPrint("%w Perceived position in FlushOutputGZIP is %10p", &(f->PPosition));
00344     MUNLOCK(ErrorMessageLock);
00345 #endif
00346 /*
00347     Reset the output
00348 */
00349     f->zsp->next_out = f->ziobuffer;
00350     f->zsp->avail_out = f->ziosize;
00351     f->zsp->total_out = 0;
00352     if ( ( zerror = deflateEnd(f->zsp) ) == Z_OK ) return(0);
00353     MLOCK(ErrorMessageLock);
00354     if ( f->zsp->msg ) {
00355         MesPrint("%wError in finishing gzip handling of output: %s", f->zsp->msg);
00356     }
00357     else {
00358         MesPrint("%wError in finishing gzip handling of output.");
00359     }
00360     MUNLOCK(ErrorMessageLock);
00361 }
00362 else {
00363     MLOCK(ErrorMessageLock);
00364     MesPrint("%wError in gzip handling of output.");
00365     MUNLOCK(ErrorMessageLock);
00366 }
00367 return(-1);
00368 }
00369
00370 /*
00371 #] FlushOutputGZIP :
00372 #[ SetupAllInputGZIP :
00373
00374 Routine prepares all gzip input streams for a merge.
00375
00376 Problem (29-may-2008): If we never use GZIP compression, this routine
00377 will still allocate the array space. This is an enormous amount!
00378 It places an effective restriction on the value of SortIOsize
00379 */
00380
00381 int SetupAllInputGZIP(SORTING *S)
00382 {
00383     GETIDENTITY
00384     int i, NumberOpened = 0;
00385     z_stream zsp;
00386 /*
00387     This code was added 29-may-2008 by JV to prevent further processing if
00388     there is no compression at all (usually).
00389 */
00390     for ( i = 0; i < S->inNum; i++ ) {
00391         if ( S->fpincompressed[i] ) break;
00392     }
00393     if ( i >= S->inNum ) return(0);
00394
00395     if ( S->zsparray == 0 ) {

```



```

00396     S->zsparray = (z_streamp)Malloc1(sizeof(z_stream)*S->MaxFpatches,"input zstreams");
00397     if ( S->zsparray == 0 ) {
00398         MLOCK(ErrorMessageLock);
00399         MesCall("SetupAllInputGZIP");
00400         MUNLOCK(ErrorMessageLock);
00401         Terminate(-1);
00402     }
00403     /*
00404     We add 128 bytes in the hope that if it can happen that it goes
00405     outside the buffer during decompression, it does not do damage.
00406     */
00407     AN.ziobuffers = (Bytef *)Malloc1(S->MaxFpatches*(S->file.ziosize+128)*sizeof(Bytef),"input raw
buffers");
00408     /*
00409     This seems to be one of the really stupid errors:
00410     We allocate way too much space. Way way way too much.
00411     AN.ziobufnum = (Bytef **)Malloc1(S->MaxFpatches*S->file.ziosize*sizeof(Bytef *),"input raw
pointers");
00412     */
00413     AN.ziobufnum = (Bytef **)Malloc1(S->MaxFpatches*sizeof(Bytef *),"input raw pointers");
00414     if ( AN.ziobuffers == 0 || AN.ziobufnum == 0 ) {
00415         MLOCK(ErrorMessageLock);
00416         MesCall("SetupAllInputGZIP");
00417         MUNLOCK(ErrorMessageLock);
00418         Terminate(-1);
00419     }
00420     for ( i = 0 ; i < S->MaxFpatches; i++ ) {
00421         AN.ziobufnum[i] = AN.ziobuffers + i * (S->file.ziosize+128);
00422     }
00423 }
00424 for ( i = 0; i < S->inNum; i++ ) {
00425     #ifdef GZIPDEBUG
00426         MLOCK(ErrorMessageLock);
00427         MesPrint("%wPreparing z-stream %d with compression %d",i,S->fpincompressed[i]);
00428         MUNLOCK(ErrorMessageLock);
00429     #endif
00430     if ( S->fpincompressed[i] ) {
00431         zsp = &(S->zsparray[i]);
00432     /*
00433         1: Set the default fields:
00434     */
00435         zsp->zalloc = Z_NULL;
00436         zsp->zfree = Z_NULL;
00437         zsp->opaque = Z_NULL;
00438     /*
00439         2: Set the output space:
00440     */
00441         zsp->next_out = Z_NULL;
00442         zsp->avail_out = 0;
00443         zsp->total_out = 0;
00444     /*
00445         3: Set the input space temporarily:
00446     */
00447         zsp->next_in = Z_NULL;
00448         zsp->avail_in = 0;
00449         zsp->total_in = 0;
00450     /*
00451         4: Initiate the inflation
00452     */
00453         if ( inflateInit(zsp) != Z_OK ) {
00454             MLOCK(ErrorMessageLock);
00455             if ( zsp->msg ) MesPrint("%wError from inflateInit: %s",zsp->msg);
00456             else MesPrint("%wError from inflateInit");
00457             MesCall("SetupAllInputGZIP");
00458             MUNLOCK(ErrorMessageLock);
00459             Terminate(-1);
00460         }
00461         NumberOpened++;
00462     }
00463 }
00464 return (NumberOpened);
00465 }
00466
00467 /*
00468 #] SetupAllInputGZIP :
00469 #[ FillInputGZIP :
00470
00471 Routine is called when we need new input in the specified buffer.
00472 This buffer is used for the output and we keep reading and uncompressing
00473 input till either this buffer is full or the input stream is finished.
00474 The return value is the number of bytes in the buffer.
00475 */
00476
00477 LONG FillInputGZIP(FILEHANDLE *f, POSITION *position, UBYTE *buffer, LONG buffersize, int numstream)
00478 {
00479     GETIDENTITY
00480     int zerror;

```

```

00481     LONG readsize, toread = 0;
00482     SORTING *S = AT.SS;
00483     z_stream zsp;
00484     POSITION pos;
00485     if ( S->fpincompressed[numstream] ) {
00486         zsp = &(S->zsparray[numstream]);
00487         zsp->next_out = (Bytef *)buffer;
00488         zsp->avail_out = buffersize;
00489         zsp->total_out = 0;
00490         if ( zsp->avail_in == 0 ) {
00491             /*
00492              First loading of the input
00493             */
00494             if ( ISGEPOSINC(S->fPatchesStop[numstream],*position,f->ziosize) ) {
00495                 toread = f->ziosize;
00496             }
00497             else {
00498                 DIFPOS(pos,S->fPatchesStop[numstream],*position);
00499                 toread = (LONG) (BASEPOSITION(pos));
00500             }
00501             if ( toread > 0 ) {
00502 #ifdef GZIPDEBUG
00503                 MLOCK(ErrorMessageLock);
00504                 MesPrint("%w-+Reading %l bytes in stream %d at position %l0p; stop at
00505 %l0p",toread,numstream,position,&(S->fPatchesStop[numstream]));
00506                 MUNLOCK(ErrorMessageLock);
00507 #endif
00508 #ifdef ALLLOCK
00509                 LOCK(f->pthreadlock);
00510 #endif
00511                 SeekFile(f->handle,position,SEEK_SET);
00512                 readsize = ReadFile(f->handle,(UBYTE *) (AN.ziobufnum[numstream]),toread);
00513                 SeekFile(f->handle,position,SEEK_CUR);
00514 #ifdef ALLLOCK
00515                 UNLOCK(f->pthreadlock);
00516 #endif
00517 #ifdef GZIPDEBUG
00518                 MLOCK(ErrorMessageLock);
00519                 { char *s = AN.ziobufnum[numstream]+readsize;
00520                   MesPrint("%w read: %l +Last bytes read: %d %d %d %d %d in %s, newpos =
00521 %l0p",readsize,s[-5],s[-4],s[-3],s[-2],s[-1],f->name,position);
00522                 }
00523                 MUNLOCK(ErrorMessageLock);
00524 #endif
00525                 if ( readsize == 0 ) {
00526                     zsp->next_in = AN.ziobufnum[numstream];
00527                     zsp->avail_in = f->ziosize;
00528                     zsp->total_in = 0;
00529                     return(zsp->total_out);
00530                 }
00531                 if ( readsize < 0 ) {
00532                     MLOCK(ErrorMessageLock);
00533                     MesPrint("%wFillInputGZIP: Read error during compressed sort.");
00534                     MUNLOCK(ErrorMessageLock);
00535                     return(-1);
00536                 }
00537                 ADDPOS(f->filesize,readsize);
00538                 ADDPOS(f->POposition,readsize);
00539             /*
00540              Set the input
00541             */
00542             zsp->next_in = AN.ziobufnum[numstream];
00543             zsp->avail_in = readsize;
00544             zsp->total_in = 0;
00545         }
00546     }
00547     if ( toread > 0 || zsp->avail_in ) {
00548         while ( ( zerror = inflate(zsp,Z_NO_FLUSH) ) == Z_OK ) {
00549             if ( zsp->avail_out == 0 ) {
00550                 /*
00551                  Finish
00552                 */
00553                 return((LONG) (zsp->total_out));
00554             }
00555             if ( zsp->avail_in == 0 ) {
00556                 if ( ISEQUALPOS(S->fPatchesStop[numstream],*position) ) {
00557                     /*
00558                      We finished this stream. Try to terminate.
00559                     */
00560                     zerror = Z_STREAM_END;
00561                     break;
00562                 }
00563                 if ( ( zerror = inflate(zsp,Z_SYNC_FLUSH) ) == Z_OK ) {
00564                     return((LONG) (zsp->total_out));
00565                 }
00566             }
00567             else

```

```

00566                 break;
00567 */
00568 /*
00569 #ifdef GZIPDEBUG
00570     MLOCK(ErrorMessageLock);
00571     MesPrint("%wClosing stream %d",numstream);
00572 #endif
00573     readsize = zsp->total_out;
00574 #ifdef GZIPDEBUG
00575     if ( readsize > 0 ) {
00576         WORD *s = (WORD *) (buffer+zsp->total_out);
00577         MesPrint("%w    Last words: %d %d %d %d %d",s[-5],s[-4],s[-3],s[-2],s[-1]);
00578     }
00579     else {
00580         MesPrint("%w No words");
00581     }
00582     MUNLOCK(ErrorMessageLock);
00583 #endif
00584     if ( ( zerror = inflateEnd(zsp) ) == Z_OK ) return(readsize);
00585     break;
00586 */
00587 }
00588 /*
00589     Read more input
00590 */
00591 #ifdef GZIPDEBUG
00592     if ( numstream == 0 ) {
00593         MLOCK(ErrorMessageLock);
00594         MesPrint("%wWant to read in stream 0 at position %l0p",position);
00595         MUNLOCK(ErrorMessageLock);
00596     }
00597 #endif
00598     if ( ISGEPOSINC(S->fPatchesStop[numstream],*position,f->ziosize) ) {
00599         toread = f->ziosize;
00600     }
00601     else {
00602         DIFPOS(pos,S->fPatchesStop[numstream],*position);
00603         toread = (LONG) (BASEPOSITION(pos));
00604     }
00605 #ifdef GZIPDEBUG
00606     MLOCK(ErrorMessageLock);
00607     MesPrint("%w--Reading %l bytes in stream %d at position
00608 %l0p",toread,numstream,position);
00609     MUNLOCK(ErrorMessageLock);
00610 #endif
00611 #ifdef ALLLOCK
00612     LOCK(f->pthreadlock);
00613 #endif
00614     SeekFile(f->handle,position,SEEK_SET);
00615     readsize = ReadFile(f->handle,(UBYTE *) (AN.ziobufnum[numstream]),toread);
00616     SeekFile(f->handle,position,SEEK_CUR);
00617 #ifdef ALLLOCK
00618     UNLOCK(f->pthreadlock);
00619 #endif
00620 #ifdef GZIPDEBUG
00621     MLOCK(ErrorMessageLock);
00622     { char *s = AN.ziobufnum[numstream]+readsize;
00623         MesPrint("%w    Last bytes read: %d %d %d %d %d",s[-5],s[-4],s[-3],s[-2],s[-1]);
00624     }
00625     MUNLOCK(ErrorMessageLock);
00626 #endif
00627     if ( readsize == 0 ) {
00628         zsp->next_in = AN.ziobufnum[numstream];
00629         zsp->avail_in = f->ziosize;
00630         zsp->total_in = 0;
00631         return(zsp->total_out);
00632     }
00633     if ( readsize < 0 ) {
00634         MLOCK(ErrorMessageLock);
00635         MesPrint("%wFillInputGZIP: Read error during compressed sort.");
00636         MUNLOCK(ErrorMessageLock);
00637         return(-1);
00638     }
00639     ADDPOS(f->filesize,readsize);
00640     ADDPOS(f->POposition,readsize);
00641 /*
00642     Reset the input
00643 */
00644     zsp->next_in = AN.ziobufnum[numstream];
00645     zsp->avail_in = readsize;
00646     zsp->total_in = 0;
00647 }
00648 else {
00649     break;
00650 }
00651 }

```

```

00652         else {
00653             zerror = Z_STREAM_END;
00654             zsp->total_out = 0;
00655         }
00656 #ifdef GZIPDEBUG
00657         MLOCK(ErrorMessageLock);
00658         MesPrint("%w zerror = %d in stream %d. At position %10p",zerror,numstream,position);
00659         MUNLOCK(ErrorMessageLock);
00660 #endif
00661         if ( zerror == Z_STREAM_END ) {
00662             /*
00663                 Reset the input
00664             */
00665             zsp->next_in = Z_NULL;
00666             zsp->avail_in = 0;
00667             zsp->total_in = 0;
00668             /*
00669                 Make the final call and finish
00670             */
00671 #ifdef GZIPDEBUG
00672             MLOCK(ErrorMessageLock);
00673             MesPrint("%wClosing stream %d",numstream);
00674 #endif
00675             readsize = zsp->total_out;
00676 #ifdef GZIPDEBUG
00677             if ( readsize > 0 ) {
00678                 WORD *s = (WORD *) (buffer+zsp->total_out);
00679                 MesPrint("%w -Last words: %d %d %d %d %d",s[-5],s[-4],s[-3],s[-2],s[-1]);
00680             }
00681             else {
00682                 MesPrint("%w No words");
00683             }
00684             MUNLOCK(ErrorMessageLock);
00685 #endif
00686             if ( zsp->zalloc != Z_NULL ) {
00687                 zerror = inflateEnd(zsp);
00688                 zsp->zalloc = Z_NULL;
00689             }
00690             if ( zerror == Z_OK || zerror == Z_STREAM_END ) return(readsize);
00691         }
00692         MLOCK(ErrorMessageLock);
00693         MesPrint("%wFillInputGZIP: Error in gzip handling of input. zerror = %d",zerror);
00694         MUNLOCK(ErrorMessageLock);
00695         return(-1);
00696     }
00697 }
00698 else {
00699 #ifdef GZIPDEBUG
00700     MLOCK(ErrorMessageLock);
00701     MesPrint("%w++Reading %l bytes at position %10p",buffer,size,position);
00702     MUNLOCK(ErrorMessageLock);
00703 #endif
00704 #ifdef ALLLOCK
00705     LOCK(f->pthreadlock);
00706 #endif
00707     SeekFile(f->handle,position,SEEK_SET);
00708     readsize = ReadFile(f->handle,buffer,buffer,size);
00709     SeekFile(f->handle,position,SEEK_CUR);
00710 #ifdef ALLLOCK
00711     UNLOCK(f->pthreadlock);
00712 #endif
00713     if ( readsize < 0 ) {
00714         MLOCK(ErrorMessageLock);
00715         MesPrint("%wFillInputGZIP: Read error during uncompressed sort.");
00716         MesPrint("%w++Reading %l bytes at position %10p",buffer,size,position);
00717         MUNLOCK(ErrorMessageLock);
00718     }
00719     return(readsize);
00720 }
00721 }
00722
00723 /*
00724 #] FillInputGZIP :
00725 #[ ClearSortGZIP :
00726 */
00727
00728 void ClearSortGZIP(FILEHANDLE *f)
00729 {
00730     if ( f->ziobuffer ) {
00731         M_free(f->ziobuffer,"output zbuffer");
00732         M_free(f->zsp,"output zstream");
00733         f->ziobuffer = 0;
00734     }
00735 }
00736
00737 /*
00738 #] ClearSortGZIP :


```

```
00739 */
00740 #endif
```

4.15 comtool.c File Reference

```
#include "form3.h"
```

Include dependency graph for comtool.c:

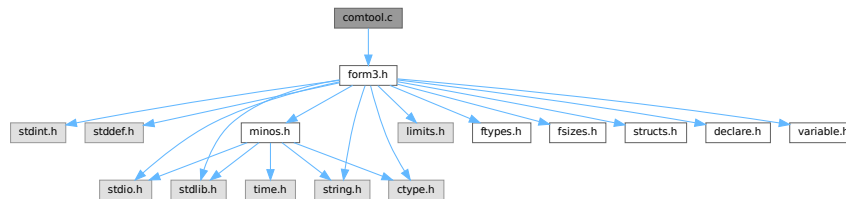

Functions

- int [inicbufs](#) (void)
- void [finishcbuf](#) (WORD num)
- void [clearcbuf](#) (WORD num)
- WORD * [DoubleCbuffer](#) (int num, WORD *w, int par)
- WORD * [AddLHS](#) (int num)
- WORD * [AddRHS](#) (int num, int type)
- int [AddNtoL](#) (int n, WORD *array)
- int [AddNtoC](#) (int bufnum, int n, WORD *array, int par)
- int [InsTree](#) (int bufnum, int h)
- int [FindTree](#) (int bufnum, WORD *subexpr)
- void [RedoTree](#) (CBUF *C, int size)
- void [ClearTree](#) (int i)
- int [IniFbuffer](#) (WORD bufnum)
- LONG [numcommute](#) (WORD *terms, LONG *numterms)

4.15.1 Detailed Description

Utility routines for the compiler.

Definition in file [comtool.c](#).

4.15.2 Function Documentation

4.15.2.1 inicbufs()

```
int inicbufs (
    void )
```

Creates a new compiler buffer and returns its ID number.

Returns

The ID number for the new compiler buffer.

Definition at line 47 of file [comtool.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [CbUf::lhs](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Referenced by [AddRHS\(\)](#), and [StartVariables\(\)](#).

4.15.2.2 finishcbuf()

```
void finishcbuf (
    WORD num )
```

Frees a compiler buffer.

Parameters

<i>num</i>	The ID number for the buffer to be freed.
------------	---

Definition at line 89 of file [comtool.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::CanCommu](#), [CbUf::lhs](#), [CbUf::NumTerms](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Referenced by [PF_BroadcastCBuf\(\)](#).

4.15.2.3 clearcbuf()

```
void clearcbuf (
    WORD num )
```

Clears contents in a compiler buffer.

Parameters

<i>num</i>	The ID number for the buffer to be cleared.
------------	---

Definition at line 116 of file [comtool.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::Pointer](#), and [CbUf::rhs](#).

4.15.2.4 DoubleCbuffer()

```
WORD * DoubleCbuffer (
    int num,
    WORD * w,
    int par )
```

Doubles a compiler buffer.

Parameters

<i>num</i>	The ID number for the buffer to be doubled.
<i>w</i>	The pointer to the end (exclusive) of the current buffer. The contents in the range of [cbuff[num].Buffer,w) will be kept.

Definition at line 143 of file [comtool.c](#).

References [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::lhs](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Referenced by [AddNtoC\(\)](#), and [AddNtoL\(\)](#).

4.15.2.5 AddLHS()

```
WORD * AddLHS (
    int num )
```

Adds an LHS to a compiler buffer and returns the pointer to a buffer for the new LHS.

Parameters

<i>num</i>	The ID number for the buffer to get another LHS.
------------	--

Definition at line 188 of file [comtool.c](#).

References [CbUf::lhs](#), and [CbUf::Pointer](#).

Referenced by [AddNtoL\(\)](#).

4.15.2.6 AddRHS()

```
WORD * AddRHS (
    int num,
    int type )
```

Adds an RHS to a compiler buffer and returns the pointer to a buffer for the new RHS.

Parameters

<i>num</i>	The ID number for the buffer to get another RHS.
<i>type</i>	If 0, the subexpression tree will be reallocated.

Definition at line 214 of file [comtool.c](#).

References [TaBIEs::buffers](#), [TaBIEs::buffersfill](#), [TaBIEs::bufferssize](#), [TaBIEs::bufnum](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [inicbufs\(\)](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [CbUf::Pointer](#), and [CbUf::rhs](#).

Referenced by [InsertArg\(\)](#), [StartVariables\(\)](#), and [TestMatch\(\)](#).

Here is the call graph for this function:



4.15.2.7 AddNtoL()

```

int AddNtoL (
    int n,
    WORD * array )
  
```

Adds an LHS with the given data to the current compiler buffer.

Parameters

<i>n</i>	The length of the data.
<i>array</i>	The data to be added.


Returns

0 if succeeds.

Definition at line 288 of file [comtool.c](#).

References [AddLHS\(\)](#), [DoubleCbuffer\(\)](#), [CbUf::Pointer](#), and [CbUf::Top](#).

Here is the call graph for this function:

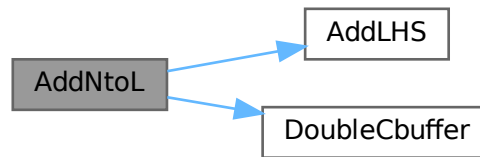

4.15.2.8 AddNtoC()

```

int AddNtoC (
    int bufnum,
    int n,
    WORD * array,
    int par )
  
```

Adds the given data to the last LHS/RHS in a compiler buffer.

Parameters

<i>bufnum</i>	The ID number for the buffer where the data will be added.
<i>n</i>	The length of the data.
<i>array</i>	The data to be added.

Returns

0 if succeeds.

Definition at line 317 of file [comtool.c](#).

References [DoubleCbuffer\(\)](#), [CbUf::Pointer](#), and [CbUf::Top](#).

Referenced by [InsertArg\(\)](#), and [StartVariables\(\)](#).

Here is the call graph for this function:



4.15.2.9 InsTree()

```
int InsTree (
    int bufnum,
    int h )
```

Definition at line 355 of file [comtool.c](#).

4.15.2.10 FindTree()

```
int FindTree (
    int bufnum,
    WORD * subexpr )
```

Definition at line 533 of file [comtool.c](#).

4.15.2.11 RedoTree()

```
void RedoTree (
    CBUF * C,
    int size )
```

Definition at line 569 of file [comtool.c](#).

4.15.2.12 ClearTree()

```
void ClearTree (
    int i )
```

Definition at line 588 of file [comtool.c](#).

4.15.2.13 IniFbuffer()

```
int IniFbuffer (
    WORD bufnum )
```

Initialize a factorization cache buffer. We set the size of the rhs and boomlijst buffers immediately to their final values.

Definition at line 614 of file [comtool.c](#).

References [tree::blnce](#), [CbUf::boomlijst](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [tree::left](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [tree::parent](#), [CbUf::rhs](#), [tree::right](#), [tree::usage](#), and [tree::value](#).

4.15.2.14 numcommute()

```
LONG numcommute (
    WORD * terms,
    LONG * numterms )
```

Definition at line 659 of file [comtool.c](#).

4.16 comtool.c

[Go to the documentation of this file.](#)

```

00001
00005 /* #[] License : */
00006 /*
00007 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 * When using this file you are requested to refer to the publication
00009 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 * This is considered a matter of courtesy as the development was paid
00011 * for by FOM the Dutch physics granting agency and we would like to
00012 * be able to track its scientific use to convince FOM of its value
00013 * for the community.
00014 *
00015 * This file is part of FORM.
00016 *
00017 * FORM is free software: you can redistribute it and/or modify it under the
00018 * terms of the GNU General Public License as published by the Free Software
00019 * Foundation, either version 3 of the License, or (at your option) any later
00020 * version.
00021 *
00022 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 * details.
00026 *
00027 * You should have received a copy of the GNU General Public License along
00028 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[] License : */
00031 /*
00032 * #[] Includes :
00033 */
00034 #include "form3.h"
00035
00036 /*
00037 * #[] Includes :
00038 * #[] inicbufs :
00039 */
00040
00041
00047 int inicbufs(void)
00048 {
00049     int i, num = AC.cbufList.num;
00050     CBUF *C = cbuf;
00051     for ( i = 0; i < num; i++, C++ ) {
00052         if ( C->Buffer == 0 ) break;
00053     }
00054     if ( i >= num ) C = (CBUF *)FromList(&AC.cbufList);
00055     else num = i;
00056     C->BufferSize = 2000;
00057     C->Buffer = (WORD *)Malloc1(C->BufferSize*sizeof(WORD),"compiler buffer-1");
00058     C->Pointer = C->Buffer;
00059     C->Top = C->Buffer + C->BufferSize;
00060     C->maxlhs = 10;
00061     C->lhs = (WORD **)Malloc1(C->maxlhs*sizeof(WORD *),"compiler buffer-2");
00062     C->numlhs = 0;
00063     C->mnumlhs = 0;
00064     C->maxrhs = 25;
00065     C->rhs = (WORD **)Malloc1(C->maxrhs*(sizeof(WORD *)+2*sizeof(LONG)+2*sizeof(WORD)),"compiler
buffer-3");
00066     C->CanCommu = (LONG *) (C->rhs+C->maxrhs);
00067     C->NumTerms = C->CanCommu+C->maxrhs;
00068     C->numdum = (WORD *) (C->NumTerms+C->maxrhs);
00069     C->dimension = C->numdum + C->maxrhs;
00070     C->numrhs = 0;
00071     C->mnumrhs = 0;
00072     C->rhs[0] = C->rhs[1] = C->Pointer;
00073     C->boomlijst = 0;
00074     RedoTree(C,C->maxrhs);
00075     ClearTree(num);
00076     return(num);
00077 }
00078
00079 /*
00080 * #[] inicbufs :
00081 * #[] finishcbuf :
00082 */
00083
00089 void finishcbuf(WORD num)
00090 {
00091     CBUF *C = cbuf+num;
00092     if ( C->Buffer ) M_free(C->Buffer,"compiler buffer-1");
00093     if ( C->rhs ) M_free(C->rhs,"compiler buffer-3");
00094     if ( C->lhs ) M_free(C->lhs,"compiler buffer-2");

```

```

00095     if ( C->boomlijst ) M_free(C->boomlijst,"boomlijst");
00096     C->Top = C->Pointer = C->Buffer = 0;
00097     C->rhs = C->lhs = 0;
00098     C->CanCommu = 0;
00099     C->NumTerms = 0;
00100     C->BufferSize = 0;
00101     C->boomlijst = 0;
00102     C->numlhs = C->numrhs = C->maxlhs = C->maxrhs = C->mnumlhs =
00103     C->mnumrhs = C->numtree = C->rootnum = C->MaxTreeSize = 0;
00104 }
00105
00106 /*
00107  #] finishcbuf :
00108  #[ clearcbuf :
00109  */
00110
00116 void clearcbuf(WORD num)
00117 {
00118     CBUF *C = cbuf+num;
00119     if ( C->boomlijst ) M_free(C->boomlijst,"boomlijst");
00120     C->Pointer = C->Buffer;
00121     C->numrhs = C->numlhs = 0;
00122     C->mnumlhs = 0;
00123     C->boomlijst = 0;
00124     C->mnumrhs = 0;
00125     C->rhs[0] = C->rhs[1] = C->Pointer;
00126     C->numtree = C->rootnum = C->MaxTreeSize = 0;
00127     RedoTree(C,C->maxrhs);
00128     ClearTree(num);
00129 }
00130
00131 /*
00132  #] clearcbuf :
00133  #[ DoubleCbuffer :
00134  */
00135
00143 WORD *DoubleCbuffer(int num, WORD *w,int par)
00144 {
00145     CBUF *C = cbuf + num;
00146     LONG newsize = C->BufferSize*2;
00147     WORD *newbuffer = (WORD *)Malloc1(newsize*sizeof(WORD),"compiler buffer-4");
00148     WORD *w1, *w2;
00149     LONG offset, j, i;
00150     DUMMYUSE(par)
00151     /*
00152     MLOCK(ErrorMessageLock);
00153     MesPrint(" doubleCbuffer: par = %d",par);
00154     MUNLOCK(ErrorMessageLock);
00155     */
00156     w1 = C->Buffer; w2 = newbuffer;
00157     i = w - w1;
00158     j = i & 7;
00159     while ( --j >= 0 ) *w2++ = *w1++;
00160     i >>= 3;
00161     while ( --i >= 0 ) {
00162         *w2++ = *w1++; *w2++ = *w1++; *w2++ = *w1++; *w2++ = *w1++;
00163         *w2++ = *w1++; *w2++ = *w1++; *w2++ = *w1++; *w2++ = *w1++;
00164     }
00165     offset = newbuffer - C->Buffer;
00166     for ( i = 0; i <= C->numlhs; i++ ) C->lhs[i] += offset;
00167     for ( i = 1; i <= C->numrhs; i++ ) C->rhs[i] += offset;
00168     w1 = C->Buffer;
00169     C->Pointer += offset;
00170     C->Top = newbuffer + newsize;
00171     C->BufferSize = newsize;
00172     C->Buffer = newbuffer;
00173     M_free(w1,"DoubleCbuffer");
00174     return(w2);
00175 }
00176
00177 /*
00178  #] DoubleCbuffer :
00179  #[ AddLHS :
00180  */
00181
00188 WORD *AddLHS(int num)
00189 {
00190     CBUF *C = cbuf + num;
00191     C->numlhs++;
00192     if ( C->numlhs >= (C->maxlhs-2) ) {
00193         WORD ***ppp = &(C->lhs); /* to avoid compiler warning */
00194         if ( DoubleList((void ***)ppp,&(C->maxlhs),sizeof(WORD *),
00195             "statement lists") ) Terminate(-1);
00196     }
00197     C->lhs[C->numlhs] = C->Pointer;
00198     C->lhs[C->numlhs+1] = 0;
00199     return(C->Pointer);

```

```

00200 }
00201
00202 /*
00203 #] AddLHS :
00204 #[ AddrHS :
00205 */
00206
00214 WORD *AddRHS(int num, int type)
00215 {
00216     LONG fullsize, *lold, newsize;
00217     int i;
00218     WORD **old, *wold;
00219     CBUF *C;
00220 restart:;
00221     C = cbuf + num;
00222     if ( C->numrhs >= (C->maxrhs-2) ) {
00223         if ( C->maxrhs == 0 ) newsize = 100;
00224         else newsize = C->maxrhs * 2;
00225         if ( newsize > MAXCOMBUFRHS ) newsize = MAXCOMBUFRHS;
00226         if ( newsize == C->maxrhs ) {
00227             if ( AC.tablefilling ) {
00228                 TABLES T = functions[AC.tablefilling].tabl;
00229             /*
00230              We add a compiler buffer, change a few settings and continue.
00231             */
00232             if ( T->buffersfill >= T->bufferssize ) {
00233                 int newl = 2*T->bufferssize;
00234                 WORD *nbufs = (WORD *)Mallc1(newl*sizeof(WORD),"Table compile buffers");
00235                 for ( i = 0; i < T->buffersfill; i++ )
00236                     nbufs[i] = T->buffers[i];
00237                 for ( ; i < newl; i++ ) nbufs[i] = 0;
00238                 M_free(T->buffers,"Table compile buffers");
00239                 T->buffers = nbufs;
00240                 T->bufferssize = newl;
00241             }
00242             T->buffers[T->buffersfill++] = T->bufnum = inicbufs();
00243             AC.cbunum = num = T->bufnum;
00244             goto restart;
00245         }
00246         else {
00247             MesPrint("@Compiler buffer overflow. Try to make modules smaller");
00248             Terminate(-1);
00249         }
00250     }
00251     old = C->rhs;
00252     fullsize = newsize * (sizeof(WORD *) + 2*sizeof(LONG) + 2*sizeof(WORD));
00253     C->rhs = (WORD **)Mallc1(fullsize,"subexpression lists");
00254     for ( i = 0; i < C->maxrhs; i++ ) C->rhs[i] = old[i];
00255     lold = C->CanCommu; C->CanCommu = (LONG *) (C->rhs+newsize);
00256     for ( i = 0; i < C->maxrhs; i++ ) C->CanCommu[i] = lold[i];
00257     lold = C->NumTerms; C->NumTerms = (LONG *) (C->rhs+2*newsize);
00258     for ( i = 0; i < C->maxrhs; i++ ) C->NumTerms[i] = lold[i];
00259     wold = C->numdum; C->numdum = (WORD *) (C->NumTerms+newsize);
00260     for ( i = 0; i < C->maxrhs; i++ ) C->numdum[i] = wold[i];
00261     wold = C->dimension; C->dimension = (WORD *) (C->numdum+newsize);
00262     for ( i = 0; i < C->maxrhs; i++ ) C->dimension[i] = wold[i];
00263     if ( old ) M_free(old,"subexpression lists");
00264     C->maxrhs = newsize;
00265     if ( type == 0 ) RedoTree(C,C->maxrhs);
00266 }
00267 C->numrhs++;
00268 C->CanCommu[C->numrhs] = 0;
00269 C->NumTerms[C->numrhs] = 0;
00270 C->numdum[C->numrhs] = 0;
00271 C->dimension[C->numrhs] = 0;
00272 C->rhs[C->numrhs] = C->Pointer;
00273 return(C->Pointer);
00274 }
00275
00276 /*
00277 #] AddrHS :
00278 #[ AddNtoL :
00279 */
00280
00288 int AddNtoL(int n, WORD *array)
00289 {
00290     int i;
00291     CBUF *C = cbuf+AC.cbunum;
00292 #ifdef COMPUFDEBUG
00293     MesPrint("LH: %a",n,array);
00294 #endif
00295     AddLHS(AC.cbunum);
00296     while ( C->Pointer+n >= C->Top ) DoubleCbuffer(AC.cbunum,C->Pointer,1);
00297     for ( i = 0; i < n; i++ ) *(C->Pointer)++ = *array++;
00298     return(0);
00299 }
00300

```

```

00301 /*
00302     #] AddNtoL :
00303     #[ AddNtoC :
00304
00305     Commentary: added the bufnum on 14-sep-2010 to make the whole a bit
00306     more flexible (JV). Still to do with AddNtoL.
00307 */
00308
00317 int AddNtoC(int bufnum, int n, WORD *array,int par)
00318 {
00319     int i;
00320     WORD *w;
00321     CBUF *C = cbuf+bufnum;
00322     #ifdef COMPUFDEBUG
00323     MesPrint("RH: %a",n,array);
00324     #endif
00325     while ( C->Pointer+n+1 >= C->Top ) DoubleBuffer(bufnum,C->Pointer,50+par);
00326     w = C->Pointer;
00327     for ( i = 0; i < n; i++ ) *w++ = *array++;
00328     C->Pointer = w;
00329     return(0);
00330 }
00331
00332 /*
00333     #] AddNtoC :
00334     #[ InsTree :
00335
00336     Routines for balanced tree searching and insertion.
00337     Compared to Knuth we have a parent link. This minimizes the
00338     number of compares. That is better for anything that is more
00339     complicated than just single numbers.
00340     There are no provisions for removing elements from the tree.
00341     The routines are:
00342     void RedoTree(size) Re-allocates the tree space. There will
00343                       be MaxTreeSize = size elements.
00344     void ClearTree()   Prunes the tree down to the root element.
00345     int InsTree(int,int) Searches for the requested element. If not found it
00346                       will allocate a new element, balance the tree if
00347                       necessary and return the called number.
00348                       If it was in the tree, it returns the tree 'value'.
00349
00350     Commentary: added the bufnum on 14-sep-2010 to make the whole a bit
00351     more flexible (JV).
00352 */
00353 static COMPTREE comptreezero = {0,0,0,0,0,0};
00354
00355 int InsTree(int bufnum, int h)
00356 {
00357     CBUF *C = cbuf + bufnum;
00358     COMPTREE *boomlijst = C->boomlijst, *q = boomlijst + C->rootnum, *p, *s;
00359     WORD *v1, *v2, *v3;
00360     int ip, iq, is;
00361
00362     if ( C->numtree + 1 >= C->MaxTreeSize ) {
00363         if ( C->MaxTreeSize == 0 ) {
00364             COMPTREE *root;
00365             C->MaxTreeSize = 125;
00366             C->boomlijst = (COMPTREE *)Malloc1((C->MaxTreeSize+1)*sizeof(COMPTREE),
00367             "ClearInsTree");
00368             root = C->boomlijst;
00369             C->numtree = 0;
00370             C->rootnum = 0;
00371             root->left = -1;
00372             root->right = -1;
00373             root->parent = -1;
00374             root->blnce = 0;
00375             root->value = -1;
00376             root->usage = 0;
00377             for ( ip = 1; ip < C->MaxTreeSize; ip++ ) { C->boomlijst[ip] = comptreezero; }
00378         }
00379         else {
00380             is = C->MaxTreeSize * 2;
00381             s = (COMPTREE *)Malloc1((is+1)*sizeof(COMPTREE),"InsTree");
00382             for ( ip = 0; ip < C->MaxTreeSize; ip++ ) { s[ip] = C->boomlijst[ip]; }
00383             for ( ip = C->MaxTreeSize; ip <= is; ip++ ) { s[ip] = comptreezero; }
00384             if ( C->boomlijst ) M_free(C->boomlijst,"InsTree");
00385             C->boomlijst = s;
00386             C->MaxTreeSize = is;
00387         }
00388         boomlijst = C->boomlijst;
00389         q = boomlijst + C->rootnum;
00390     }
00391
00392     if ( q->right == -1 ) { /* First element */
00393         C->numtree++;
00394         s = boomlijst+C->numtree;
00395         q->right = C->numtree;

```

```

00396     s->parent = C->rootnum;
00397     s->left = s->right = -1;
00398     s->blnce = 0;
00399     s->value = h;
00400     s->usage = 1;
00401     return(h);
00402 }
00403 ip = q->right;
00404 while ( ip >= 0 ) {
00405     p = boomlijst + ip;
00406     v1 = C->rhs[p->value]; v2 = v3 = C->rhs[h];
00407     while ( *v3 ) v3 += *v3; /* find the 0 that indicates end-of-expr */
00408     while ( *v1 == *v2 && v2 < v3 ) { v1++; v2++; }
00409     if ( *v1 > *v2 ) {
00410         iq = p->right;
00411         if ( iq >= 0 ) { ip = iq; }
00412     } else {
00413         C->numtree++;
00414         is = C->numtree;
00415         p->right = is;
00416         s = boomlijst + is;
00417         s->parent = ip; s->left = s->right = -1;
00418         s->blnce = 0; s->value = h; s->usage = 1;
00419         p->blnce++;
00420         if ( p->blnce == 0 ) return(h);
00421         goto balance;
00422     }
00423 }
00424 else if ( *v1 < *v2 ) {
00425     iq = p->left;
00426     if ( iq >= 0 ) { ip = iq; }
00427 } else {
00428     C->numtree++;
00429     is = C->numtree;
00430     s = boomlijst+is;
00431     p->left = is;
00432     s->parent = ip; s->left = s->right = -1;
00433     s->blnce = 0; s->value = h; s->usage = 1;
00434     p->blnce--;
00435     if ( p->blnce == 0 ) return(h);
00436     goto balance;
00437 }
00438 }
00439 else {
00440     p->usage++;
00441     return(p->value);
00442 }
00443 }
00444 MesPrint("We vallen uit de boom!");
00445 Terminate(-1);
00446 return(h);
00447 balance;;
00448 for (;;) {
00449     p = boomlijst + ip;
00450     iq = p->parent;
00451     if ( iq == C->rootnum ) break;
00452     q = boomlijst + iq;
00453     if ( ip == q->left ) q->blnce--;
00454     else q->blnce++;
00455     if ( q->blnce == 0 ) break;
00456     if ( q->blnce == -2 ) {
00457         if ( p->blnce == -1 ) { /* single rotation */
00458             q->left = p->right;
00459             p->right = iq;
00460             p->parent = q->parent;
00461             q->parent = ip;
00462             if ( boomlijst[p->parent].left == iq ) boomlijst[p->parent].left = ip;
00463             else boomlijst[p->parent].right = ip;
00464             if ( q->left >= 0 ) boomlijst[q->left].parent = iq;
00465             q->blnce = p->blnce = 0;
00466         }
00467         else { /* double rotation */
00468             s = boomlijst + is;
00469             q->left = s->right;
00470             p->right = s->left;
00471             s->right = iq;
00472             s->left = ip;
00473             if ( p->right >= 0 ) boomlijst[p->right].parent = ip;
00474             if ( q->left >= 0 ) boomlijst[q->left].parent = iq;
00475             s->parent = q->parent;
00476             q->parent = is;
00477             p->parent = is;
00478             if ( boomlijst[s->parent].left == iq )
00479                 boomlijst[s->parent].left = is;
00480             else boomlijst[s->parent].right = is;
00481             if ( s->blnce > 0 ) { q->blnce = s->blnce = 0; p->blnce = -1; }
00482             else if ( s->blnce < 0 ) { p->blnce = s->blnce = 0; q->blnce = 1; }

```

```

00483         else { p->blnce = s->blnce = q->blnce = 0; }
00484     }
00485     break;
00486 }
00487 else if ( q->blnce == 2 ) {
00488     if ( p->blnce == 1 ) { /* single rotation */
00489         q->right = p->left;
00490         p->left = iq;
00491         p->parent = q->parent;
00492         q->parent = ip;
00493         if ( boomlijst[p->parent].left == iq ) boomlijst[p->parent].left = ip;
00494         else boomlijst[p->parent].right = ip;
00495         if ( q->right >= 0 ) boomlijst[q->right].parent = iq;
00496         q->blnce = p->blnce = 0;
00497     }
00498     else { /* double rotation */
00499         s = boomlijst + is;
00500         q->right = s->left;
00501         p->left = s->right;
00502         s->left = iq;
00503         s->right = ip;
00504         if ( p->left >= 0 ) boomlijst[p->left].parent = ip;
00505         if ( q->right >= 0 ) boomlijst[q->right].parent = iq;
00506         s->parent = q->parent;
00507         q->parent = is;
00508         p->parent = is;
00509         if ( boomlijst[s->parent].left == iq ) boomlijst[s->parent].left = is;
00510         else boomlijst[s->parent].right = is;
00511         if ( s->blnce < 0 ) { q->blnce = s->blnce = 0; p->blnce = 1; }
00512         else if ( s->blnce > 0 ) { p->blnce = s->blnce = 0; q->blnce = -1; }
00513         else { p->blnce = s->blnce = q->blnce = 0; }
00514     }
00515     break;
00516 }
00517     is = ip; ip = iq;
00518 }
00519 return(h);
00520 }
00521
00522 /*
00523 #] InsTree :
00524 #[ FindTree :
00525
00526 Routines for balanced tree searching.
00527 Is like InsTree but without the insertions.
00528 Returns -1 if the element is not in the tree.
00529 The advantage of this routine over InsTree is that this routine
00530 can be run in parallel.
00531 */
00532
00533 int FindTree(int bufnum, WORD *subexpr)
00534 {
00535     CBUF *C = cbuf + bufnum;
00536     COMPTREE *boomlijst = C->boomlijst, *q = boomlijst + C->rootnum, *p;
00537     WORD *v1, *v2, *v3;
00538     int ip, iq;
00539
00540     ip = q->right;
00541     while ( ip >= 0 ) {
00542         p = boomlijst + ip;
00543         v1 = C->rhs[p->value]; v2 = v3 = subexpr;
00544         while ( *v3 ) v3 += *v3; /* find the 0 that indicates end-of-expr */
00545         while ( *v1 == *v2 && v2 < v3 ) { v1++; v2++; }
00546         if ( *v1 > *v2 ) {
00547             iq = p->right;
00548             if ( iq >= 0 ) { ip = iq; }
00549             else { return(-1); }
00550         }
00551         else if ( *v1 < *v2 ) {
00552             iq = p->left;
00553             if ( iq >= 0 ) { ip = iq; }
00554             else { return(-1); }
00555         }
00556         else {
00557             p->usage++;
00558             return(p->value);
00559         }
00560     }
00561     return(-1);
00562 }
00563
00564 /*
00565 #] FindTree :
00566 #[ RedoTree :
00567 */
00568
00569 void RedoTree(CBUF *C, int size)

```



```

00570 {
00571     COMPTREE *newboomlijst;
00572     int i;
00573     newboomlijst = (COMPTREE *)Malloc1((size+1)*sizeof(COMPTREE), "newboomlijst");
00574     if ( C->boomlijst ) {
00575         if ( C->MaxTreeSize > size ) C->MaxTreeSize = size;
00576         for ( i = 0; i < C->MaxTreeSize; i++ ) newboomlijst[i] = C->boomlijst[i];
00577         M_free(C->boomlijst, "boomlijst");
00578     }
00579     C->boomlijst = newboomlijst;
00580     C->MaxTreeSize = size;
00581 }
00582 /*
00583 #] RedoTree :
00584 #[ ClearTree :
00585 #] RedoTree :
00586 #[ ClearTree :
00587 */
00588 void ClearTree(int i)
00589 {
00590     CBUF *C = cbuf + i;
00591     COMPTREE *root = C->boomlijst;
00592     if ( root ) {
00593         C->numtree = 0;
00594         C->rootnum = 0;
00595         root->left = -1;
00596         root->right = -1;
00597         root->parent = -1;
00598         root->blnce = 0;
00599         root->value = -1;
00600         root->usage = 0;
00601     }
00602 }
00603 /*
00604 #] ClearTree :
00605 #[ IniFbuffer :
00606 #] ClearTree :
00607 #[ IniFbuffer :
00608 */
00614 int IniFbuffer(WORD bufnum)
00615 {
00616     CBUF *C = cbuf + bufnum;
00617     COMPTREE *root;
00618     int i;
00619     LONG fullsize;
00620     C->maxrhs = AM.fbuffersize;
00621     C->MaxTreeSize = AM.fbuffersize;
00622     /*
00623     * Note that bufnum is a return value of inicbufs(). So C has been already
00624     * initialized. (TU 20 Dec 2011)
00625     */
00626     if ( C->boomlijst ) M_free(C->boomlijst, "IniFbuffer-tree");
00627     if ( C->rhs ) M_free(C->rhs, "IniFbuffer-rhs");
00628     C->boomlijst = (COMPTREE *)Malloc1((C->MaxTreeSize+1)*sizeof(COMPTREE), "IniFbuffer-tree");
00629     root = C->boomlijst;
00630     C->numtree = 0;
00631     C->rootnum = 0;
00632     root->left = -1;
00633     root->right = -1;
00634     root->parent = -1;
00635     root->blnce = 0;
00636     root->value = -1;
00637     root->usage = 0;
00638     for ( i = 1; i < C->MaxTreeSize; i++ ) { C->boomlijst[i] = comptreezero; }
00639     fullsize = (C->maxrhs+1) * (sizeof(WORD *) + 2*sizeof(LONG) + 2*sizeof(WORD));
00640     C->rhs = (WORD **)Malloc1(fullsize, "IniFbuffer-rhs");
00641     C->CanCommu = (LONG *) (C->rhs+C->maxrhs);
00642     C->NumTerms = (LONG *) (C->rhs+2*C->maxrhs);
00643     C->numdum = (WORD *) (C->NumTerms+C->maxrhs);
00644     C->dimension = (WORD *) (C->numdum+C->maxrhs);
00645     return(0);
00646 }
00647 /*
00648 #] IniFbuffer :
00649 #[ numcommute :
00650 #] IniFbuffer :
00651 #[ numcommute :
00652 */
00653 Returns the number of non-commuting terms in the expression
00654 LONG numcommute(WORD *terms, LONG *numterms)
00655 {
00656     LONG num = 0;
00657     WORD *t, *m;

```

```


00663     *numterms = 0;
00664     while ( *terms ) {
00665         *numterms += 1;
00666         t = terms + 1;
00667         GETSTOP(terms,m);
00668         while ( t < m ) {
00669             if ( *t >= FUNCTION ) {
00670                 if ( functions[*t-FUNCTION].commute ) { num++; break; }
00671             }
00672             t += t[1];
00673         }
00674         terms = terms + *terms;
00675     }
00676     return(num);
00677 }
00678 /*
00679  #] numcommute :
00681 */

```


4.17 comtool.h File Reference

#include "form3.h"

Include dependency graph for comtool.h:

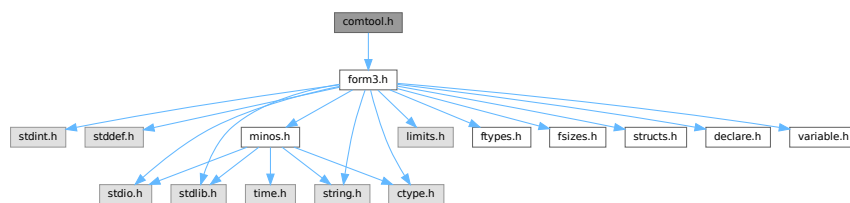

This graph shows which files directly or indirectly include this file:

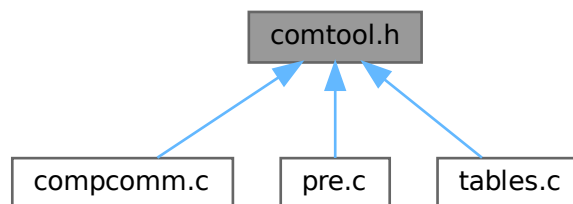

4.17.1 Detailed Description

Utility routines for the compiler.

Definition in file [comtool.h](#).

4.18 comtool.h

[Go to the documentation of this file.](#)

```

00001
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 *   When using this file you are requested to refer to the publication
00009 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 *   This is considered a matter of courtesy as the development was paid
00011 *   for by FOM the Dutch physics granting agency and we would like to
00012 *   be able to track its scientific use to convince FOM of its value
00013 *   for the community.
00014 *
00015 *   This file is part of FORM.
00016 *
00017 *   FORM is free software: you can redistribute it and/or modify it under the
00018 *   terms of the GNU General Public License as published by the Free Software
00019 *   Foundation, either version 3 of the License, or (at your option) any later
00020 *   version.
00021 *
00022 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 *   details.
00026 *
00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[ License : */
00031 #ifndef FORM_COMTOOL_H_
00032 #define FORM_COMTOOL_H_
00033 /*
00034 *   #[ Includes :
00035 */
00036
00037 #include "form3.h"
00038
00039 /*
00040 *   #[ Includes :
00041 *   #[ Inline functions :
00042 */
00043
00050 static inline void SkipSpaces(UBYTE **s)
00051 {
00052     const char *p = (const char *)*s;
00053     while ( *p == ' ' || *p == ',' || *p == '\t' ) p++;
00054     *s = (UBYTE *)p;
00055 }
00056
00066 static inline int ConsumeOption(UBYTE **s, const char *opt)
00067 {
00068     const char *p = (const char *)*s;
00069     while ( *p && *opt && tolower(*p) == tolower(*opt) ) {
00070         p++;
00071         opt++;
00072     }
00073     /* Check if `opt` ended. */
00074     if ( !*opt ) {
00075         /* Check if `*p` is a word boundary. */
00076         if ( !*p || !(FG.cTable[(unsigned char)*p] == 0 ||
00077             FG.cTable[(unsigned char)*p] == 1 || *p == '_' ||
00078             *p == '$') ) {
00079             /* Consume the option. Skip the trailing spaces. */
00080             *s = (UBYTE *)p;
00081             SkipSpaces(s);
00082             return(1);
00083         }
00084     }
00085     return(0);
00086 }
00087
00088 /*
00089 *   #[ Inline functions :
00090 */
00091 #endif /* FORM_COMTOOL_H_ */

```

4.19 declare.h File Reference

This graph shows which files directly or indirectly include this file:



Macros

- #define **MaX**(x, y) ((x) > (y) ? (x): (y))
- #define **MiN**(x, y) ((x) < (y) ? (x): (y))
- #define **ABS**(x) ((x) < 0 ? -(x): (x))
- #define **SGN**(x) ((x) > 0 ? 1 : (x) < 0 ? -1 : 0)
- #define **REDLENG**(x) (((x)<0)?((x)+1):((x)-1))/2)
- #define **INCLENG**(x) (((x)<0)?(((x)*2)-1):(((x)*2)+1))
- #define **GETCOEF**(x, y) x += *x; y = x[-1]; x -= ABS(y); y=REDLENG(y)
- #define **GETSTOP**(x, y) y=x+(*x)-1; y -= ABS(*y)-1
- #define **StuffAdd**(x, y) (((x)<0?-1:1)*y)+((y)<0?-1:1)*(x)
- #define **EXCHN**(t1, t2, n) { WORD a,i; for(i=0;i<n;i++){a=t1[i];t1[i]=t2[i];t2[i]=a; } }
- #define **EXCH**(x, y) { WORD a = (x); (x) = (y); (y) = a; }
- #define **TOKENTOLINE**(x, y)
- #define **UngetFromStream**(stream, c) ((stream)->nextchar[(stream)->isnextchar++]=c)
- #define **AddLineFeed**(s, n) { (s)[(n)++] = LINEFEED; }
- #define **TryRecover**(x) Terminate(-1)
- #define **UngetChar**(c) { pushbackchar = c; }
- #define **ParseNumber**(x, s) {(x)=0;while(*(s)>='0'&&*(s)<='9')(x)=10*(x)+*(s)++ -'0';}
- #define **ParseSign**(sgn, s)
- #define **ParseSignedNumber**(x, s)
- #define **NCOPY**(s, t, n) { while ((n)-- > 0) { *s++ = *t++; } }
- #define **NCOPYI**(s, t, n) { while ((n)-- > 0) { *s++ = *t++; } }
- #define **NCOPYB**(s, t, n) { while ((n)-- > 0) { *s++ = *t++; } }
- #define **NCOPYI32**(s, t, n) { while ((n)-- > 0) { *s++ = *t++; } }
- #define **WCOPY**(s, t, n) { int nn=n; WORD *ss=(WORD *)s, *tt=(WORD *)t; while ((nn)-- > 0) { *ss++ = *tt++; } }
- #define **NeedNumber**(x, s, err)
- #define **SKIPBLANKS**(s) { while (*(s) == ' ' || *(s) == '\t') (s)++; }
- #define **FLUSHCONSOLE** if (AP.InOutBuf > 0) CharOut(LINEFEED)
- #define **SKIPBRA1**(s)
- #define **SKIPBRA2**(s)
- #define **SKIPBRA3**(s)
- #define **SKIPBRA4**(s)
- #define **SKIPBRA5**(s)
- #define **CYCLE1**(t, a, i) { t iX=*a; WORD jX; for(jX=1;jX<i;jX++)a[jX-1]=a[jX]; a[i-1]=iX;}
- #define **AddToCB**(c, wx)
- #define **EXCHINOUT**
- #define **BACKINOUT**
- #define **CopyArg**(to, from)
- #define **FILLARG**(w)
- #define **COPYARG**(w, t)
- #define **ZEROARG**(w)
- #define **FILLFUN**(w)
- #define **COPYFUN**(w, t)

- #define [COPYFUN3](#)(w, t)
- #define [FILLFUN3](#)(w)
- #define [FILLSUB](#)(w)
- #define [COPYSUB](#)(w, ww)
- #define [FILLEXP](#)(w)
- #define [NEXTARG](#)(x) if(*x>0) x += *x; else if(*x <= -FUNCTION)x++; else x += 2;
- #define [COPY1ARG](#)(s1, t1)
- #define [ZeroFillRange](#)(w, begin, end)
- #define [TABLESIZE](#)(a, b) (((WORD)sizeof(a))/((WORD)sizeof(b)))
- #define [WORDDIFF](#)(x, y) (WORD)(x-y)
- #define [wsizeof](#)(a) ((WORD)sizeof(a))
- #define [VARNAME](#)(type, num) (AC.varnames->namebuffer+type[num].name)
- #define [DOLLARNAME](#)(type, num) (AC.dollarnames->namebuffer+type[num].name)
- #define [EXPRNAME](#)(num) (AC.exprnames->namebuffer+Expressions[num].name)
- #define [PREV](#)(x) prevorder?prevorder:x
- #define [Terminate](#)(x) do { TerminateImpl(x, __FILE__, __LINE__, __FUNCTION__); } while(0)
- #define [SETERROR](#)(x) { Terminate(-1); return(-1); }
- #define [DUMMYUSE](#)(x) (void)(x);
- #define [ADDPOS](#)(pp, x) (pp).p1 = ((pp).p1+(LONG)(x))
- #define [SETBASELENGTH](#)(ss, x) (ss).p1 = (LONG)(x)
- #define [SETBASEPOSITION](#)(pp, x) (pp).p1 = (LONG)(x)
- #define [ISEQUALPOSINC](#)(pp1, pp2, x) ((pp1).p1 == ((pp2).p1+(LONG)(x)))
- #define [ISGEPOSINC](#)(pp1, pp2, x) ((pp1).p1 >= ((pp2).p1+(LONG)(x)))
- #define [DIVPOS](#)(pp, n) ((pp).p1/(LONG)(n))
- #define [MULPOS](#)(pp, n) (pp).p1 *= (LONG)(n)
- #define [DIFPOS](#)(ss, pp1, pp2) (ss).p1 = ((pp1).p1-(pp2).p1)
- #define [DIFBASE](#)(pp1, pp2) ((pp1).p1-(pp2).p1)
- #define [ADD2POS](#)(pp1, pp2) (pp1).p1 += (pp2).p1
- #define [PUTZERO](#)(pp) (pp).p1 = 0
- #define [BASEPOSITION](#)(pp) ((pp).p1)
- #define [SETSTARTPOS](#)(pp) (pp).p1 = -2
- #define [NOTSTARTPOS](#)(pp) ((pp).p1 > -2)
- #define [ISMINPOS](#)(pp) ((pp).p1 == -1)
- #define [ISEQUALPOS](#)(pp1, pp2) ((pp1).p1 == (pp2).p1)
- #define [ISNOTEQUALPOS](#)(pp1, pp2) ((pp1).p1 != (pp2).p1)
- #define [ISLESSPOS](#)(pp1, pp2) ((pp1).p1 < (pp2).p1)
- #define [ISGEPOS](#)(pp1, pp2) ((pp1).p1 >= (pp2).p1)
- #define [ISNOTZEROPOS](#)(pp) ((pp).p1 != 0)
- #define [ISZEROPOS](#)(pp) ((pp).p1 == 0)
- #define [ISPOSPOS](#)(pp) ((pp).p1 > 0)
- #define [ISNEGPOS](#)(pp) ((pp).p1 < 0)
- #define [TOLONG](#)(x) ((LONG)(x))
- #define [Add2Com](#)(x) { WORD cod[2]; cod[0] = x; cod[1] = 2; [AddNtoL](#)(2,cod); }
- #define [Add3Com](#)(x1, x2) { WORD cod[3]; cod[0] = x1; cod[1] = 3; cod[2] = x2; [AddNtoL](#)(3,cod); }
- #define [Add4Com](#)(x1, x2, x3)
- #define [Add5Com](#)(x1, x2, x3, x4)
- #define [WantAddPointers](#)(x)
- #define [WantAddLongs](#)(x)
- #define [WantAddPositions](#)(x)
- #define [FORM_INLINE](#) inline
- #define [MEMORYMACROS](#)
- #define [TermMalloc](#)(x) ((AT.TermMemTop <= 0) ? TermMallocAddMemory(BHEAD0, AT.TermMemHeap[--AT.TermMemTop]: AT.TermMemHeap[--AT.TermMemTop]))
- #define [NumberMalloc](#)(x) ((AT.NumberMemTop <= 0) ? NumberMallocAddMemory(BHEAD0, AT.NumberMemHeap[--AT.NumberMemTop]: AT.NumberMemHeap[--AT.NumberMemTop]))

- `#define CacheNumberMalloc(x) ( (AT.CacheNumberMemTop <= 0 ) ? CacheNumberMallocAddMemory(BHEAD0), AT.CacheNumberMemHeap[--AT.CacheNumberMemTop]: AT.CacheNumberMemHeap[--AT.CacheNumberMemTop] )`
- `#define TermFree(TermMem, x) AT.TermMemHeap[AT.TermMemTop++] = (WORD *)(TermMem)`
- `#define NumberFree(NumberMem, x) AT.NumberMemHeap[AT.NumberMemTop++] = (UWORD *)(NumberMem)`
- `#define CacheNumberFree(NumberMem, x) AT.CacheNumberMemHeap[AT.CacheNumberMemTop++] = (UWORD *)(NumberMem)`
- `#define NestingChecksum() (AC.IfLevel + AC.RepLevel + AC.arglevel + AC.insidelevel + AC.termlevel + AC.inexprlevel + AC.dolooplevel + AC.SwitchLevel)`
- `#define MesNesting() MesPrint("&Illegal nesting of if, repeat, argument, inside, term, inexpression and do")`
- `#define MarkPolyRatFunDirty(T)`
- `#define PUSHPREASSIGNLEVEL`
- `#define POPPREASSIGNLEVEL`
- `#define EXTERNLOCK(x)`
- `#define INILOCK(x)`
- `#define LOCK(x)`
- `#define UNLOCK(x)`
- `#define EXTERNRWLOCK(x)`
- `#define INIRWLOCK(x)`
- `#define RWLOCKR(x)`
- `#define RWLOCKW(x)`
- `#define UNRWLOCK(x)`
- `#define MLOCK(x)`
- `#define MUNLOCK(x)`
- `#define GETIDENTITY`
- `#define GETBIDENTITY`
- `#define M_alloc(x) malloc((size_t)(x))`
- `#define CompareTerms ((COMPARE)AR.CompareRoutine)`
- `#define FiniShuffle AN.SHvar.finishuf`
- `#define DoShuffle ((DO_UFFLE)AN.SHvar.do_uffle)`

Typedefs

- `typedef int(* WRITEBUFTOEXTCHANNEL) (char *, size_t)`
- `typedef int(* GETCFROMEXTCHANNEL) (void)`
- `typedef int(* SETTERMINATORFOREXTCHANNEL) (char *)`
- `typedef int(* SETKILLMODEFOREXTCHANNEL) (int, int)`
- `typedef LONG(* WRITEFILE) (int, UBYTE *, LONG)`
- `typedef WORD(* GETTERM) (PHEAD WORD *)`

Functions

- void `TELLFILE` (int, `POSITION` *)
- void `StartVariables` (void)
- void `setSignalHandlers` (void)
- UBYTE * `CodeToLine` (WORD, UBYTE *)
- UBYTE * `AddArrayIndex` (WORD, UBYTE *)
- `INDEXENTRY` * `FindInIndex` (WORD, `FILEDATA` *, WORD, WORD)
- `INDEXENTRY` * `NextFileIndex` (`POSITION` *)
- WORD * `PasteTerm` (PHEAD WORD, WORD *, WORD *, WORD, WORD)
- UBYTE * `StrCopy` (UBYTE *, UBYTE *)
- UBYTE * `WrtPower` (UBYTE *, WORD)

- int [AccumGCD](#) (PHEAD UWORD *, WORD *, UWORD *, WORD)
- void [AddArgs](#) (PHEAD WORD *, WORD *, WORD *)
- int [AddCoef](#) (PHEAD WORD **, WORD **)
- int [AddLong](#) (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- int [AddPLon](#) (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- int [AddPoly](#) (PHEAD WORD **, WORD **)
- int [AddRat](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- void [AddToLine](#) (UBYTE *)
- int [AddWild](#) (PHEAD WORD, WORD, WORD)
- int [BigLong](#) (UWORD *, WORD, UWORD *, WORD)
- int [BinomGen](#) (PHEAD WORD *, WORD, WORD **, WORD, WORD, WORD, WORD, WORD, UWORD *, WORD)
- int [CheckWild](#) (PHEAD WORD, WORD, WORD, WORD *)
- int [Chisholm](#) (PHEAD WORD *, WORD)
- int [CleanExpr](#) (WORD)
- void [CleanUp](#) (WORD)
- void [ClearWild](#) (PHEAD0)
- int [CompareFunctions](#) (WORD *, WORD *)
- int [Commute](#) (WORD *, WORD *)
- WORD [DetCommu](#) (WORD *)
- WORD [DoesCommu](#) (WORD *)
- int [CompArg](#) (WORD *, WORD *)
- WORD [CompCoef](#) (WORD *, WORD *)
- int [CompGroup](#) (PHEAD WORD, WORD **, WORD *, WORD *, WORD)
- WORD [Compare1](#) (PHEAD WORD *, WORD *, WORD)
- WORD [CountDo](#) (WORD *, WORD *)
- WORD [CountFun](#) (WORD *, WORD *)
- WORD [DimensionSubterm](#) (WORD *)
- WORD [DimensionTerm](#) (WORD *)
- WORD [DimensionExpression](#) (PHEAD WORD *)
- int [Deferred](#) (PHEAD WORD *, WORD)
- int [DeleteStore](#) (WORD)
- WORD [DetCurDum](#) (PHEAD WORD *)
- void [DetVars](#) (WORD *, WORD)
- int [Distribute](#) (DISTRIBUTE *, WORD)
- int [DivLong](#) (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *, UWORD *, WORD *)
- int [DivRat](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- int [Divvy](#) (PHEAD UWORD *, WORD *, UWORD *, WORD)
- int [DoDelta](#) (WORD *)
- int [DoDelta3](#) (PHEAD WORD *, WORD)
- int [TestPartitions](#) (WORD *, [PARTI](#) *)
- int [DoPartitions](#) (PHEAD WORD *, WORD)
- int [CoCanonicalize](#) (UBYTE *)
- int [DoCanonicalize](#) (PHEAD WORD *, WORD *)
- int [GenTopologies](#) (PHEAD WORD *, WORD)
- int [GenDiagrams](#) (PHEAD WORD *, WORD)
- int [DoTopologyCanonicalize](#) (PHEAD WORD *, WORD, WORD, WORD *)
- int [DoShattering](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [GenerateTopologies](#) (PHEAD WORD, WORD, WORD, WORD)
- int [DoTableExpansion](#) (WORD *, WORD)
- int [DoDistrib](#) (PHEAD WORD *, WORD)
- int [DoShuffle](#) (WORD *, WORD, WORD, WORD)
- int [DoPermutations](#) (PHEAD WORD *, WORD)
- int [Shuffle](#) (WORD *, WORD *, WORD *)
- int [FinishShuffle](#) (WORD *)

- int [DoStuffle](#) (WORD *, WORD, WORD, WORD)
- int [Stuffle](#) (WORD *, WORD *, WORD *)
- int [FinishStuffle](#) (WORD *)
- WORD * [StuffRootAdd](#) (WORD *, WORD *, WORD *)
- int [TestUse](#) (WORD *, WORD)
- DBASE * [FindTB](#) (UBYTE *)
- int [CheckTableDeclarations](#) (DBASE *)
- void [Apply](#) (WORD *, WORD)
- int [ApplyExec](#) (WORD *, int, WORD)
- void [ApplyReset](#) (WORD)
- void [TableReset](#) (void)
- void [ReWorkT](#) (WORD *, WORD *, WORD)
- WORD [GetIfDollarNum](#) (WORD *, WORD *)
- int [FindVar](#) (WORD *, WORD *)
- int [DolfStatement](#) (PHEAD WORD *, WORD *)
- int [DoOnePow](#) (PHEAD WORD *, WORD, WORD, WORD *, WORD *, WORD, WORD *)
- void [DoRevert](#) (WORD *, WORD *)
- int [DoSumF1](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [DoSumF2](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [DoTheta](#) (PHEAD WORD *)
- LONG [EndSort](#) (PHEAD WORD *, int)
- int [EntVar](#) (WORD, UBYTE *, WORD, WORD, WORD, WORD)
- int [EpfCon](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [EpfFind](#) (PHEAD WORD *, WORD *)
- WORD [EpfGen](#) (WORD, WORD *, WORD *, WORD *, WORD)
- int [EqualArg](#) (WORD *, WORD, WORD)
- int [Factorial](#) (PHEAD WORD, UWORD *, WORD *)
- int [Bernoulli](#) (WORD, UWORD *, WORD *)
- int [FactorIn](#) (PHEAD WORD *, WORD)
- int [FactorInExpr](#) (PHEAD WORD *, WORD)
- int [FindAll](#) (PHEAD WORD *, WORD *, WORD, WORD *)
- WORD [FindMulti](#) (PHEAD WORD *, WORD *)
- int [FindOnce](#) (PHEAD WORD *, WORD *)
- int [FindOnly](#) (PHEAD WORD *, WORD *)
- int [FindRest](#) (PHEAD WORD *, WORD *)
- void [FindSpecial](#) (WORD *)
- WORD [FindrNumber](#) (WORD, [VARRENUM](#) *)
- void [FiniLine](#) (void)
- int [FiniTerm](#) (PHEAD WORD *, WORD *, WORD *, WORD, WORD)
- int [FlushOut](#) ([POSITION](#) *, [FILEHANDLE](#) *, int)
- void [FunLevel](#) (PHEAD WORD *)
- void [AdjustRenumScratch](#) (PHEAD0)
- void [GarbHand](#) (void)
- int [GcdLong](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- int [LcmLong](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- void [GCD](#) (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- ULONG [GCD2](#) (ULONG, ULONG)
- int [Generator](#) (PHEAD WORD *, WORD)
- int [GetBinom](#) (UWORD *, WORD *, WORD, WORD)
- WORD [GetFromStore](#) (WORD *, [POSITION](#) *, [RENUMBER](#), WORD *, WORD)
- int [GetLong](#) (UBYTE *, UWORD *, WORD *)
- WORD [GetMoreTerms](#) (WORD *)
- int [GetMoreFromMem](#) (WORD *, WORD **)
- WORD [GetOneTerm](#) (PHEAD WORD *, [FILEHANDLE](#) *, [POSITION](#) *, int)
- [RENUMBER](#) [GetTable](#) (WORD, [POSITION](#) *, WORD)

- WORD [GetTerm](#) (PHEAD WORD *)
- int [Glue](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [InFunction](#) (PHEAD WORD *, WORD *)
- void [IniLine](#) (WORD)
- void [IniVars](#) (void)
- int [InsertTerm](#) (PHEAD WORD *, WORD, WORD, WORD *, WORD *, WORD)
- void [LongToLine](#) (UWORD *, WORD)
- int [MakeDirty](#) (WORD *, WORD *, WORD)
- void [MarkDirty](#) (WORD *, WORD)
- void [PolyFunDirty](#) (PHEAD WORD *)
- void [PolyFunClean](#) (PHEAD WORD *)
- int [MakeModTable](#) (void)
- int [MatchE](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [MatchCy](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [FunMatchCy](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [FunMatchSy](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [MatchArgument](#) (PHEAD WORD *, WORD *)
- int [MatchFunction](#) (PHEAD WORD *, WORD *, WORD *)
- int [MergePatches](#) (WORD)
- int [MesCerr](#) (char *, UBYTE *)
- int [MesComp](#) (char *, UBYTE *, UBYTE *)
- int [Modulus](#) (WORD *)
- void [MoveDummies](#) (PHEAD WORD *, WORD)
- int [MulLong](#) (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- int [MulRat](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- int [Mully](#) (PHEAD UWORD *, WORD *, UWORD *, WORD)
- int [MultDo](#) (PHEAD WORD *, WORD *)
- int [NewSort](#) (PHEAD0)
- int [ExtraSymbol](#) (WORD, WORD, WORD, WORD *, WORD *)
- int [Normalize](#) (PHEAD WORD *)
- int [BracketNormalize](#) (PHEAD WORD *)
- void [DropCoefficient](#) (PHEAD WORD *)
- void [DropSymbols](#) (PHEAD WORD *)
- int [PutInside](#) (PHEAD WORD *, WORD *)
- void [OpenTemp](#) (void)
- void [Pack](#) (UWORD *, WORD *, UWORD *, WORD)
- LONG [PasteFile](#) (PHEAD WORD, WORD *, [POSITION](#) *, WORD **, [RENUMBER](#), WORD *, WORD)
- int [Permute](#) ([PERM](#) *, WORD)
- int [PermuteP](#) ([PERMP](#) *, WORD)
- int [PolyFunMul](#) (PHEAD WORD *)
- int [PopVariables](#) (void)
- int [PrepPoly](#) (PHEAD WORD *, WORD)
- int [Processor](#) (void)
- int [Product](#) (UWORD *, WORD *, WORD)
- void [PrtLong](#) (UWORD *, WORD, UBYTE *)
- void [PrtTerms](#) (void)
- void [PrintDeprecation](#) (const char *, const char *)
- void [PrintRunningTime](#) (void)
- LONG [GetRunningTime](#) (void)
- int [PutBracket](#) (PHEAD WORD *)
- LONG [PutIn](#) ([FILEHANDLE](#) *, [POSITION](#) *, WORD *, WORD **, int)
- int [PutInStore](#) ([INDEXENTRY](#) *, WORD)
- WORD [PutOut](#) (PHEAD WORD *, [POSITION](#) *, [FILEHANDLE](#) *, WORD)
- UWORD [Quotient](#) (UWORD *, WORD *, WORD)
- int [RaisPow](#) (PHEAD UWORD *, WORD *, UWORD)

- void [RaisPowCached](#) (PHEAD WORD, WORD, UWORD **, WORD *)
- WORD [RaisPowMod](#) (WORD, WORD, WORD)
- int [NormalModulus](#) (UWORD *, WORD *)
- int [MakeInverses](#) (void)
- int [GetModInverses](#) (WORD, WORD, WORD *, WORD *)
- int [GetLongModInverses](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *, UWORD *, WORD *)
- void [RatToLine](#) (UWORD *, WORD)
- int [RatioFind](#) (PHEAD WORD *, WORD *)
- int [RatioGen](#) (PHEAD WORD *, WORD *, WORD, WORD)
- WORD [ReNumber](#) (PHEAD WORD *)
- WORD [ReadSnum](#) (UBYTE **)
- WORD [Remain10](#) (UWORD *, WORD *)
- WORD [Remain4](#) (UWORD *, WORD *)
- int [ResetScratch](#) (void)
- int [ResolveSet](#) (PHEAD WORD *, WORD *, WORD *)
- int [RevertScratch](#) (void)
- int [ScanFunctions](#) (PHEAD WORD *, WORD *, WORD)
- void [SeekScratch](#) (FILEHANDLE *, POSITION *)
- void [SetEndScratch](#) (FILEHANDLE *, POSITION *)
- void [SetEndHScratch](#) (FILEHANDLE *, POSITION *)
- int [SetFileIndex](#) (void)
- int [Sflush](#) (FILEHANDLE *)
- int [Simplify](#) (PHEAD UWORD *, WORD *, UWORD *, WORD *)
- int [SortWild](#) (WORD *, WORD)
- FILE * [LocateBase](#) (char **, char **, char *)
- LONG [SplitMerge](#) (PHEAD WORD **, LONG)
- int [StoreTerm](#) (PHEAD WORD *)
- void [SubPLon](#) (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- void [Substitute](#) (PHEAD WORD *, WORD *, WORD)
- int [SymFind](#) (PHEAD WORD *, WORD *)
- int [SymGen](#) (PHEAD WORD *, WORD *, WORD, WORD)
- WORD [Symmetrize](#) (PHEAD WORD *, WORD *, WORD, WORD, WORD)
- int [FullSymmetrize](#) (PHEAD WORD *, int)
- int [TakeModulus](#) (UWORD *, WORD *, UWORD *, WORD, WORD)
- int [TakeNormalModulus](#) (UWORD *, WORD *, UWORD *, WORD, WORD)
- void [TalToLine](#) (UWORD)
- int [TenVec](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [TenVecFind](#) (PHEAD WORD *, WORD *)
- int [TermRenummer](#) (WORD *, RENUMBER, WORD)
- void [TestDrop](#) (void)
- void [PutInVflags](#) (WORD)
- int [TestMatch](#) (PHEAD WORD *, WORD *)
- WORD [TestSub](#) (PHEAD WORD *, WORD)
- LONG [TimeCPU](#) (WORD)
- LONG [TimeChildren](#) (WORD)
- LONG [TimeWallClock](#) (WORD)
- LONG **Timer** (int)
- int **GetTimerInfo** (LONG **, LONG **)
- void **WriteTimerInfo** (LONG *, LONG *)
- LONG **GetWorkerTimes** (void)
- int [ToStorage](#) (EXPRESSIONS, POSITION *)
- void [TokenToLine](#) (UBYTE *)
- int [Trace4](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [Trace4Gen](#) (PHEAD TRACES *, WORD)

- int [Trace4no](#) (WORD, WORD *, [TRACES](#) *)
- int [TraceFind](#) (PHEAD WORD *, WORD *)
- int [TraceN](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [TraceNgen](#) (PHEAD [TRACES](#) *, WORD)
- WORD [TraceNno](#) (WORD, WORD *, [TRACES](#) *)
- int [Traces](#) (PHEAD WORD *, WORD *, WORD, WORD)
- WORD [Trick](#) (WORD *, [TRACES](#) *)
- int [TryDo](#) (PHEAD WORD *, WORD *, WORD)
- void [UnPack](#) (UWORD *, WORD, WORD *, WORD *)
- int [VarStore](#) (UBYTE *, WORD, WORD, WORD)
- WORD [WildFill](#) (PHEAD WORD *, WORD *, WORD *)
- int [WriteAll](#) (void)
- int [WriteOne](#) (UBYTE *, int, int, WORD)
- void [WriteArgument](#) (WORD *)
- int [WriteExpression](#) (WORD *, LONG)
- int [WriteInnerTerm](#) (WORD *, WORD)
- void [WriteLists](#) (void)
- void [WriteSetup](#) (void)
- void [WriteStats](#) ([POSITION](#) *, WORD, WORD)
- int [WriteSubTerm](#) (WORD *, WORD)
- int [WriteTerm](#) (WORD *, WORD *, WORD, WORD, WORD)
- int [execarg](#) (PHEAD WORD *, WORD)
- int [execterm](#) (PHEAD WORD *, WORD)
- void [SpecialCleanup](#) (PHEAD0)
- void [SetMods](#) (void)
- void [UnSetMods](#) (void)
- int [DoExecute](#) (WORD, WORD)
- void [SetScratch](#) ([FILEHANDLE](#) *, [POSITION](#) *)
- void [Warning](#) (char *)
- void [HighWarning](#) (char *)
- int [SpareTable](#) ([TABLES](#))
- UBYTE * [strDup1](#) (UBYTE *, char *)
- void * [Malloc1](#) (LONG, const char *)
- int [DoTail](#) (int, UBYTE **)
- int [OpenInput](#) (void)
- int [PutPreVar](#) (UBYTE *, UBYTE *, UBYTE *, int)
- void [Error0](#) (char *)
- void [Error1](#) (char *, UBYTE *)
- void [Error2](#) (char *, char *, UBYTE *)
- UBYTE [ReadFromStream](#) ([STREAM](#) *)
- UBYTE [GetFromStream](#) ([STREAM](#) *)
- UBYTE [LookInStream](#) ([STREAM](#) *)
- [STREAM](#) * [OpenStream](#) (UBYTE *, int, int, int)
- int [LocateFile](#) (UBYTE **, int)
- [STREAM](#) * [CloseStream](#) ([STREAM](#) *)
- void [PositionStream](#) ([STREAM](#) *, LONG)
- int [ReverseStatements](#) ([STREAM](#) *)
- int [ProcessOption](#) (UBYTE *, UBYTE *, int)
- int [DoSetups](#) (void)
- void [TerminateImpl](#) (int, const char *, int, const char *)
- [NAMENODE](#) * [GetNode](#) ([NAMETREE](#) *, UBYTE *)
- int [AddName](#) ([NAMETREE](#) *, UBYTE *, WORD, WORD, int *)
- int [GetName](#) ([NAMETREE](#) *, UBYTE *, WORD *, int)
- UBYTE * [GetFunction](#) (UBYTE *, WORD *)
- UBYTE * [GetNumber](#) (UBYTE *, WORD *)

- int [GetLastExprName](#) (UBYTE *, WORD *)
- int [GetAutoName](#) (UBYTE *, WORD *)
- int [GetVar](#) (UBYTE *, WORD *, WORD *, int, int)
- int [MakeDubious](#) ([NAMETREE](#) *, UBYTE *, WORD *)
- int [GetOName](#) ([NAMETREE](#) *, UBYTE *, WORD *, int)
- void [DumpTree](#) ([NAMETREE](#) *)
- void [DumpNode](#) ([NAMETREE](#) *, WORD, WORD)
- void [LinkTree](#) ([NAMETREE](#) *, WORD, WORD)
- void [CopyTree](#) ([NAMETREE](#) *, [NAMETREE](#) *, WORD, WORD)
- int [CompactifyTree](#) ([NAMETREE](#) *, WORD)
- [NAMETREE](#) * [MakeNameTree](#) (void)
- void [FreeNameTree](#) ([NAMETREE](#) *)
- int [AddExpression](#) (UBYTE *, int, int)
- int [AddSymbol](#) (UBYTE *, int, int, int, int)
- int [AddDollar](#) (UBYTE *, WORD, WORD *, LONG)
- int [ReplaceDollar](#) (WORD, WORD, WORD *, LONG)
- int [DollarRaiseLow](#) (UBYTE *, LONG)
- int [AddVector](#) (UBYTE *, int, int)
- int [AddDubious](#) (UBYTE *)
- int [AddIndex](#) (UBYTE *, int, int)
- UBYTE * [DoDimension](#) (UBYTE *, int *, int *)
- int [AddFunction](#) (UBYTE *, int, int, int, int, int, int, int)
- int [CoCommutelnSet](#) (UBYTE *)
- int [CoFunction](#) (UBYTE *, int, int)
- int [TestName](#) (UBYTE *)
- int [AddSet](#) (UBYTE *, WORD)
- int [DoElements](#) (UBYTE *, [SETS](#), UBYTE *)
- int [DoTempSet](#) (UBYTE *, UBYTE *)
- int [NameConflict](#) (int, UBYTE *)
- int [OpenFile](#) (char *)
- int [OpenAddFile](#) (char *)
- int [ReOpenFile](#) (char *)
- int [CreateFile](#) (char *)
- int [CreateLogFile](#) (char *)
- void [CloseFile](#) (int)
- int [CopyFile](#) (char *, char *)
- int [CreateHandle](#) (void)
- LONG [ReadFile](#) (int, UBYTE *, LONG)
- LONG [ReadPosFile](#) (PHEAD [FILEHANDLE](#) *, UBYTE *, LONG, [POSITION](#) *)
- LONG [WriteFileToFile](#) (int, UBYTE *, LONG)
- void [SeekFile](#) (int, [POSITION](#) *, int)
- LONG [TellFile](#) (int)
- void [FlushFile](#) (int)
- int [GetPosFile](#) (int, fpos_t *)
- int [SetPosFile](#) (int, fpos_t *)
- void [SynchFile](#) (int)
- void [TruncateFile](#) (int)
- int [GetChannel](#) (char *, int)
- int [GetAppendChannel](#) (char *)
- int [CloseChannel](#) (char *)
- void [inictable](#) (void)
- [KEYWORD](#) * [findcommand](#) (UBYTE *)
- int [inicbufs](#) (void)
- void [StartFiles](#) (void)
- UBYTE * [MakeDate](#) (void)

- void [PreProcessor](#) (void)
- void * [FromList](#) (LIST *)
- void * [From0List](#) (LIST *)
- void * [FromVarList](#) (LIST *)
- int [DoubleList](#) (void ***, int *, int, char *)
- int [DoubleLList](#) (void ***, LONG *, int, char *)
- void [DoubleBuffer](#) (void **, void **, int, char *)
- void [ExpandBuffer](#) (void **, LONG *, int)
- LONG [iexp](#) (LONG, int)
- int [IsLikeVector](#) (WORD *)
- int [AreArgsEqual](#) (WORD *, WORD *)
- int [CompareArgs](#) (WORD *, WORD *)
- UBYTE * [SkipField](#) (UBYTE *, int)
- int [StrCmp](#) (UBYTE *, UBYTE *)
- int [StrlCmp](#) (UBYTE *, UBYTE *)
- int [StrHlCmp](#) (UBYTE *, UBYTE *)
- int [StrlCont](#) (UBYTE *, UBYTE *)
- int [CmpArray](#) (WORD *, WORD *, WORD)
- int [ConWord](#) (UBYTE *, UBYTE *)
- int [StrLen](#) (UBYTE *)
- UBYTE * [GetPreVar](#) (UBYTE *, int)
- void [ToGeneral](#) (WORD *, WORD *, WORD)
- WORD [ToPolyFunGeneral](#) (PHEAD WORD *)
- int [ToFast](#) (WORD *, WORD *)
- [SETUPPARAMETERS](#) * [GetSetupPar](#) (UBYTE *)
- int [RecalcSetups](#) (void)
- int [AllocSetups](#) (void)
- [SORTING](#) * [AllocSort](#) (LONG, LONG, LONG, LONG, int, int, LONG, int)
- void [AllocSortFileName](#) ([SORTING](#) *)
- UBYTE * [LoadInputFile](#) (UBYTE *, int)
- UBYTE [GetInput](#) (void)
- void [ClearPushback](#) (void)
- UBYTE [GetChar](#) (int)
- void [CharOut](#) (UBYTE)
- void [UnsetAllowDelay](#) (void)
- void [PopPreVars](#) (int)
- void [IniModule](#) (int)
- void [IniSpecialModule](#) (int)
- int [ModuleInstruction](#) (int *, int *)
- int [PreProInstruction](#) (void)
- int [LoadInstruction](#) (int)
- int [LoadStatement](#) (int)
- [KEYWORD](#) * [FindKeyWord](#) (UBYTE *, [KEYWORD](#) *, int)
- [KEYWORD](#) * [FindInKeyWord](#) (UBYTE *, [KEYWORD](#) *, int)
- int [DoDefine](#) (UBYTE *)
- int [DoRedefine](#) (UBYTE *)
- int [TheDefine](#) (UBYTE *, int)
- int [TheUndefine](#) (UBYTE *)
- int [ClearMacro](#) (UBYTE *)
- int [DoUndefine](#) (UBYTE *)
- int [DoInclude](#) (UBYTE *)
- int [DoReverseInclude](#) (UBYTE *)
- int [Include](#) (UBYTE *, int)
- int [DoExternal](#) (UBYTE *)
- int [DoToExternal](#) (UBYTE *)

- int [DoFromExternal](#) (UBYTE *)
- int [DoPrompt](#) (UBYTE *)
- int [DoSetExternal](#) (UBYTE *)
- int [DoSetExternalAttr](#) (UBYTE *)
- int [DoRmExternal](#) (UBYTE *)
- int [DoFactDollar](#) (UBYTE *)
- WORD [GetDollarNumber](#) (UBYTE **, [DOLLARS](#))
- int [DoSetRandom](#) (UBYTE *)
- int [DoOptimize](#) (UBYTE *)
- int [DoClearOptimize](#) (UBYTE *)
- int [DoSkipExtraSymbols](#) (UBYTE *)
- int [DoTimeoutAfter](#) (UBYTE *)
- int [DoMessage](#) (UBYTE *)
- int [DoPreOut](#) (UBYTE *)
- int [DoPreAppend](#) (UBYTE *)
- int [DoPreCreate](#) (UBYTE *)
- int [DoPreAssign](#) (UBYTE *)
- int [DoPreBreak](#) (UBYTE *)
- int [DoPreDefault](#) (UBYTE *)
- int [DoPreSwitch](#) (UBYTE *)
- int [DoPreEndSwitch](#) (UBYTE *)
- int [DoPreCase](#) (UBYTE *)
- int [DoPreShow](#) (UBYTE *)
- int [DoPreExchange](#) (UBYTE *)
- int [DoSystem](#) (UBYTE *)
- int [DoPipe](#) (UBYTE *)
- void [StartPrepro](#) (void)
- int [Dolfddef](#) (UBYTE *, int)
- int [Dolfydef](#) (UBYTE *)
- int [Dolfndef](#) (UBYTE *)
- int [DoElse](#) (UBYTE *)
- int [DoElseif](#) (UBYTE *)
- int [DoEndif](#) (UBYTE *)
- int [DoTerminate](#) (UBYTE *)
- int [Dolf](#) (UBYTE *)
- int [DoCall](#) (UBYTE *)
- int [DoDebug](#) (UBYTE *)
- int [DoContinueDo](#) (UBYTE *)
- int [DoDo](#) (UBYTE *)
- int [DoBreakDo](#) (UBYTE *)
- int [DoEnddo](#) (UBYTE *)
- int [DoEndprocedure](#) (UBYTE *)
- int [DolInside](#) (UBYTE *)
- int [DoEndInside](#) (UBYTE *)
- int [DoProcedure](#) (UBYTE *)
- int [DoPrePrintTimes](#) (UBYTE *)
- int [DoPreWrite](#) (UBYTE *)
- int [DoPreClose](#) (UBYTE *)
- int [DoPreRemove](#) (UBYTE *)
- int [DoPreSortReallocate](#) (UBYTE *)
- int [DoCommentChar](#) (UBYTE *)
- int [DoProcExtension](#) (UBYTE *)
- int [DoPreReset](#) (UBYTE *)
- void [WriteString](#) (int, UBYTE *, int)
- void [WriteUnfinString](#) (int, UBYTE *, int)

- UBYTE * [AddToString](#) (UBYTE *, UBYTE *, int)
- UBYTE * [PreCalc](#) (void)
- UBYTE * [PreEval](#) (UBYTE *, LONG *)
- void [NumToStr](#) (UBYTE *, LONG)
- int [PreCmp](#) (int, int, UBYTE *, int, int, UBYTE *, int)
- int [PreEq](#) (int, int, UBYTE *, int, int, UBYTE *, int)
- UBYTE * [pParseObject](#) (UBYTE *, int *, LONG *)
- UBYTE * [PrelfEval](#) (UBYTE *, int *)
- int [EvalPrelf](#) (UBYTE *)
- int [PreLoad](#) ([PRELOAD](#) *, UBYTE *, UBYTE *, int, char *)
- int [PreSkip](#) (UBYTE *, UBYTE *, int)
- UBYTE * [EndOfToken](#) (UBYTE *)
- void [SetSpecialMode](#) (int, int)
- void [MakeGlobal](#) (void)
- int [ExecModule](#) (int)
- int [ExecStore](#) (void)
- void [FullCleanUp](#) (void)
- int [DoExecStatement](#) (void)
- int [DoPipeStatement](#) (void)
- int [DoPolyfun](#) (UBYTE *)
- int [DoPolyratfun](#) (UBYTE *)
- int [CompileStatement](#) (UBYTE *)
- UBYTE * [ToToken](#) (UBYTE *)
- int [GetDollar](#) (UBYTE *)
- int [MesWork](#) (void)
- int **MesPrint** (const char *,...)
- int [MesCall](#) (char *)
- UBYTE * [NumCopy](#) (WORD, UBYTE *)
- char * [LongCopy](#) (LONG, char *)
- char * [LongLongCopy](#) (off_t *, char *)
- void [ReserveTempFiles](#) (int)
- void [PrintTerm](#) (WORD *, char *)
- void [PrintTermC](#) (WORD *, char *)
- void [PrintSubTerm](#) (WORD *, char *)
- void [PrintWords](#) (WORD *, LONG)
- void [PrintSeq](#) (WORD *, char *)
- int [ExpandTripleDots](#) (int)
- LONG [ComPress](#) (WORD **, LONG *)
- void [StageSort](#) ([FILEHANDLE](#) *)
- void [M_free](#) (void *, const char *)
- void [ClearWildcardNames](#) (void)
- int [AddWildcardName](#) (UBYTE *)
- int [GetWildcardName](#) (UBYTE *)
- void [Globalize](#) (int)
- void [ResetVariables](#) (int)
- void [AddToPreTypes](#) (int)
- void [MessPreNesting](#) (int)
- LONG [GetStreamPosition](#) ([STREAM](#) *)
- WORD * [DoubleCbuffer](#) (int, WORD *, int)
- WORD * [AddLHS](#) (int)
- WORD * [AddRHS](#) (int, int)
- int [AddNtoL](#) (int, WORD *)
- int [AddNtoC](#) (int, int, WORD *, int)
- void [DoubleIfBuffers](#) (void)
- [STREAM](#) * [CreateStream](#) (UBYTE *)

- int [setonoff](#) (UBYTE *, int *, int, int)
- int [DoPrint](#) (UBYTE *, int)
- int [SetExpr](#) (UBYTE *, int, int)
- void [AddToCom](#) (int, WORD *)
- int [Add2ComStrings](#) (int, WORD *, UBYTE *, UBYTE *)
- int [DoSymmetrize](#) (UBYTE *, int)
- int [DoArgument](#) (UBYTE *, int)
- int [ArgFactorize](#) (PHEAD WORD *, WORD *)
- WORD * [TakeArgContent](#) (PHEAD WORD *, WORD *)
- WORD * [MakeInteger](#) (PHEAD WORD *, WORD *, WORD *)
- WORD * [MakeMod](#) (PHEAD WORD *, WORD *, WORD *)
- WORD [FindArg](#) (PHEAD WORD *)
- int [InsertArg](#) (PHEAD WORD *, WORD *, int)
- int [CleanupArgCache](#) (PHEAD WORD)
- int [ArgSymbolMerge](#) (WORD *, WORD *)
- int [ArgDotproductMerge](#) (WORD *, WORD *)
- void [SortWeights](#) (LONG *, LONG *, WORD)
- int [DoBrackets](#) (UBYTE *, int)
- int [DoPutInside](#) (UBYTE *, int)
- WORD * [CountComp](#) (UBYTE *, WORD *)
- int [CoAntiBracket](#) (UBYTE *)
- int [CoAntiSymmetrize](#) (UBYTE *)
- int [DoArgPlode](#) (UBYTE *, int)
- int [CoArgExplode](#) (UBYTE *)
- int [CoArgImplode](#) (UBYTE *)
- int [CoArgument](#) (UBYTE *)
- int [CoInside](#) (UBYTE *)
- int [ExecInside](#) (UBYTE *)
- int [CoInExpression](#) (UBYTE *)
- int [CoInParallel](#) (UBYTE *)
- int [CoNotInParallel](#) (UBYTE *)
- int [DoInParallel](#) (UBYTE *, int)
- int [CoEndInExpression](#) (UBYTE *)
- int [CoBracket](#) (UBYTE *)
- int [CoPutInside](#) (UBYTE *)
- int [CoAntiPutInside](#) (UBYTE *)
- int [CoMultiBracket](#) (UBYTE *)
- int [CoCFunction](#) (UBYTE *)
- int [CoCTensor](#) (UBYTE *)
- int [CoCollect](#) (UBYTE *)
- int [CoCompress](#) (UBYTE *)
- int [CoContract](#) (UBYTE *)
- int [CoCycleSymmetrize](#) (UBYTE *)
- int [CoDelete](#) (UBYTE *)
- int [CoTableBase](#) (UBYTE *)
- int [CoApply](#) (UBYTE *)
- int [CoDenominators](#) (UBYTE *)
- int [CoDimension](#) (UBYTE *)
- int [CoDiscard](#) (UBYTE *)
- int [CoDisorder](#) (UBYTE *)
- int [CoDrop](#) (UBYTE *)
- int [CoDropCoefficient](#) (UBYTE *)
- int [CoDropSymbols](#) (UBYTE *)
- int [CoElse](#) (UBYTE *)
- int [CoElseif](#) (UBYTE *)

- int [CoEndArgument](#) (UBYTE *)
- int [CoEndInside](#) (UBYTE *)
- int [CoEndIf](#) (UBYTE *)
- int [CoEndRepeat](#) (UBYTE *)
- int [CoEndTerm](#) (UBYTE *)
- int [CoEndWhile](#) (UBYTE *)
- int [CoExit](#) (UBYTE *)
- int [CoFactArg](#) (UBYTE *)
- int [CoFactDollar](#) (UBYTE *)
- int [CoFactorize](#) (UBYTE *)
- int [CoNFactorize](#) (UBYTE *)
- int [CoUnFactorize](#) (UBYTE *)
- int [CoNUnFactorize](#) (UBYTE *)
- int [DoFactorize](#) (UBYTE *, int)
- int [CoFill](#) (UBYTE *)
- int [CoFillExpression](#) (UBYTE *)
- int [CoFixIndex](#) (UBYTE *)
- int [CoFormat](#) (UBYTE *)
- int [CoGlobal](#) (UBYTE *)
- int [CoGlobalFactorized](#) (UBYTE *)
- int [CoGoTo](#) (UBYTE *)
- int [Cold](#) (UBYTE *)
- int [ColdNew](#) (UBYTE *)
- int [ColdOld](#) (UBYTE *)
- int [Colf](#) (UBYTE *)
- int [ColfMatch](#) (UBYTE *)
- int [ColfNoMatch](#) (UBYTE *)
- int [CoIndex](#) (UBYTE *)
- int [CoInsideFirst](#) (UBYTE *)
- int [CoKeep](#) (UBYTE *)
- int [CoLabel](#) (UBYTE *)
- int [CoLoad](#) (UBYTE *)
- int [CoLocal](#) (UBYTE *)
- int [CoLocalFactorized](#) (UBYTE *)
- int [CoMany](#) (UBYTE *)
- int [CoMerge](#) (UBYTE *)
- int [CoStuffle](#) (UBYTE *)
- int [CoMetric](#) (UBYTE *)
- int [CoModOption](#) (UBYTE *)
- int [CoModuleOption](#) (UBYTE *)
- int [CoModulus](#) (UBYTE *)
- int [CoMulti](#) (UBYTE *)
- int [CoMultiply](#) (UBYTE *)
- int [CoNFunction](#) (UBYTE *)
- int [CoNPrint](#) (UBYTE *)
- int [CoNTensor](#) (UBYTE *)
- int [CoNWrite](#) (UBYTE *)
- int [CoNoDrop](#) (UBYTE *)
- int [CoNoSkip](#) (UBYTE *)
- int [CoNormalize](#) (UBYTE *)
- int [CoMakeInteger](#) (UBYTE *)
- int [CoFlags](#) (UBYTE *, int)
- int [CoOff](#) (UBYTE *)
- int [CoOn](#) (UBYTE *)
- int [CoOnce](#) (UBYTE *)

- int [CoOnly](#) (UBYTE *)
- int [CoOptimizeOption](#) (UBYTE *)
- int [CoPolyFun](#) (UBYTE *)
- int [CoPolyRatFun](#) (UBYTE *)
- int [CoPrint](#) (UBYTE *)
- int [CoPrintB](#) (UBYTE *)
- int [CoProperCount](#) (UBYTE *)
- int [CoUnitTrace](#) (UBYTE *)
- int [CoRCycleSymmetrize](#) (UBYTE *)
- int [CoRatio](#) (UBYTE *)
- int [CoRedefine](#) (UBYTE *)
- int [CoRenumber](#) (UBYTE *)
- int [CoRepeat](#) (UBYTE *)
- int [CoSave](#) (UBYTE *)
- int [CoSelect](#) (UBYTE *)
- int [CoSet](#) (UBYTE *)
- int [CoSetExitFlag](#) (UBYTE *)
- int [CoSkip](#) (UBYTE *)
- int [CoProcessBucket](#) (UBYTE *)
- int [CoPushHide](#) (UBYTE *)
- int [CoPopHide](#) (UBYTE *)
- int [CoHide](#) (UBYTE *)
- int [CoIntoHide](#) (UBYTE *)
- int [CoNoIntoHide](#) (UBYTE *)
- int [CoNoHide](#) (UBYTE *)
- int [CoUnHide](#) (UBYTE *)
- int [CoNoUnHide](#) (UBYTE *)
- int [CoSort](#) (UBYTE *)
- int [CoSplitArg](#) (UBYTE *)
- int [CoSplitFirstArg](#) (UBYTE *)
- int [CoSplitLastArg](#) (UBYTE *)
- int [CoSum](#) (UBYTE *)
- int [CoSymbol](#) (UBYTE *)
- int [CoSymmetrize](#) (UBYTE *)
- int [DoTable](#) (UBYTE *, int)
- int [CoTable](#) (UBYTE *)
- int [CoTerm](#) (UBYTE *)
- int [CoNTable](#) (UBYTE *)
- int [CoCTable](#) (UBYTE *)
- void [EmptyTable](#) ([TABLES](#))
- int [CoToTensor](#) (UBYTE *)
- int [CoToVector](#) (UBYTE *)
- int [CoTrace4](#) (UBYTE *)
- int [CoTraceN](#) (UBYTE *)
- int [CoChisholm](#) (UBYTE *)
- int [CoTransform](#) (UBYTE *)
- int [CoClearTable](#) (UBYTE *)
- int [DoChain](#) (UBYTE *, int)
- int [CoChainin](#) (UBYTE *)
- int [CoChainout](#) (UBYTE *)
- int [CoTryReplace](#) (UBYTE *)
- int [CoVector](#) (UBYTE *)
- int [CoWhile](#) (UBYTE *)
- int [CoWrite](#) (UBYTE *)
- int [CoAuto](#) (UBYTE *)

- int [CoSwitch](#) (UBYTE *)
- int [CoCase](#) (UBYTE *)
- int [CoBreak](#) (UBYTE *)
- int [CoDefault](#) (UBYTE *)
- int [CoEndSwitch](#) (UBYTE *)
- int [CoTBaddto](#) (UBYTE *)
- int [CoTBaudit](#) (UBYTE *)
- int [CoTbcleanup](#) (UBYTE *)
- int [CoTbcreate](#) (UBYTE *)
- int [CoTBenter](#) (UBYTE *)
- int [CoTBhelp](#) (UBYTE *)
- int [CoTbload](#) (UBYTE *)
- int [CoTBoff](#) (UBYTE *)
- int [CoTBon](#) (UBYTE *)
- int [CoTBopen](#) (UBYTE *)
- int [CoTBreplace](#) (UBYTE *)
- int [CoTbuse](#) (UBYTE *)
- int [CoTestUse](#) (UBYTE *)
- int [CoThreadBucket](#) (UBYTE *)
- int [AddComString](#) (int, WORD *, UBYTE *, int)
- int [CompileAlgebra](#) (UBYTE *, int, WORD *)
- int [IsIdStatement](#) (UBYTE *)
- UBYTE * [IsRHS](#) (UBYTE *, UBYTE)
- int [ParenthesesTest](#) (UBYTE *)
- int [tokenize](#) (UBYTE *, WORD)
- void [WriteTokens](#) (SBYTE *)
- int [simp1token](#) (SBYTE *)
- int [simpwtoken](#) (SBYTE *)
- int [simp2token](#) (SBYTE *)
- int [simp3atoken](#) (SBYTE *, int)
- int [simp3btoken](#) (SBYTE *, int)
- int [simp4token](#) (SBYTE *)
- int [simp5token](#) (SBYTE *, int)
- int [simp6token](#) (SBYTE *, int)
- UBYTE * [SkipAName](#) (UBYTE *)
- int [TestTables](#) (void)
- int [GetLabel](#) (UBYTE *)
- int [ColdExpression](#) (UBYTE *, int)
- int [CoAssign](#) (UBYTE *)
- int [DoExpr](#) (UBYTE *, int, int)
- int [CompileSubExpressions](#) (SBYTE *)
- int [CodeGenerator](#) (SBYTE *)
- int [CompleteTerm](#) (WORD *, UWORD *, UWORD *, WORD, WORD, int)
- int [CodeFactors](#) (SBYTE *s)
- WORD [GenerateFactors](#) (WORD, WORD)
- int [InsTree](#) (int, int)
- int [FindTree](#) (int, WORD *)
- void [RedoTree](#) (CBUF *, int)
- void [ClearTree](#) (int)
- int [CatchDollar](#) (int)
- int [AssignDollar](#) (PHEAD WORD *, WORD)
- UBYTE * [WriteDollarToBuffer](#) (WORD, WORD)
- UBYTE * [WriteDollarFactorToBuffer](#) (WORD, WORD, WORD)
- void [AddToDollarBuffer](#) (UBYTE *)
- int [PutTermInDollar](#) (WORD *, WORD)

- void [TermAssign](#) (WORD *)
- void [WildDollars](#) (PHEAD WORD *)
- LONG [numcommute](#) (WORD *, LONG *)
- int [FullRenummer](#) (PHEAD WORD *, WORD)
- int [Lus](#) (WORD *, WORD, WORD, WORD, WORD, WORD)
- int [FindLus](#) (int, int, int)
- int [CoReplaceLoop](#) (UBYTE *)
- int [CoFindLoop](#) (UBYTE *)
- int [DoFindLoop](#) (UBYTE *, int)
- int [CoFunPowers](#) (UBYTE *)
- int [SortTheList](#) (int *, int)
- int [MatchIsPossible](#) (WORD *, WORD *)
- int [StudyPattern](#) (WORD *)
- WORD [DolToTensor](#) (PHEAD WORD)
- WORD [DolToFunction](#) (PHEAD WORD)
- WORD [DolToVector](#) (PHEAD WORD)
- WORD [DolToNumber](#) (PHEAD WORD)
- WORD [DolToSymbol](#) (PHEAD WORD)
- WORD [DolToIndex](#) (PHEAD WORD)
- LONG [DolToLong](#) (PHEAD WORD)
- int [DollarFactorize](#) (PHEAD WORD)
- int [CoPrintTable](#) (UBYTE *)
- int [CoDeallocateTable](#) (UBYTE *)
- void [CleanDollarFactors](#) (DOLLARS)
- WORD * [TakeDollarContent](#) (PHEAD WORD *, WORD **)
- WORD * [MakeDollarInteger](#) (PHEAD WORD *, WORD **)
- WORD * [MakeDollarMod](#) (PHEAD WORD *, WORD **)
- int [GetDolNum](#) (PHEAD WORD *, WORD *)
- void [AddPotModdollar](#) (WORD)
- int [Optimize](#) (WORD, int)
- int [ClearOptimize](#) (void)
- int [TakeLongRoot](#) (UWORD *, WORD *, WORD)
- int [TakeRatRoot](#) (UWORD *, WORD *, WORD)
- int [MakeRational](#) (WORD, WORD, WORD *, WORD *)
- int [MakeLongRational](#) (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *)
- void [ClearTableTree](#) (TABLES)
- int [InsTableTree](#) (TABLES, WORD *)
- void [RedoTableTree](#) (TABLES, int)
- int [FindTableTree](#) (TABLES, WORD *, int)
- void [finishcbuf](#) (WORD)
- void [clearcbuf](#) (WORD)
- void [CleanUpSort](#) (int)
- FILEHANDLE * [AllocFileHandle](#) (WORD, char *)
- void [DeAllocFileHandle](#) (FILEHANDLE *)
- void [LowerSortLevel](#) (void)
- WORD * [PolyRatFunSpecial](#) (PHEAD WORD *, WORD *)
- void [SimpleSplitMergeRec](#) (WORD *, WORD, WORD *)
- void [SimpleSplitMerge](#) (WORD *, WORD)
- WORD [BinarySearch](#) (WORD *, WORD, WORD)
- int [InsideDollar](#) (PHEAD WORD *, WORD)
- DOLLARS [DolToTerms](#) (PHEAD WORD)
- WORD [EvalDoLoopArg](#) (PHEAD WORD *, WORD)
- int [SetExprCases](#) (int, int, int)
- int [TestSelect](#) (WORD *, WORD *)
- void [SubsInAll](#) (PHEAD0)

- void [TransferBuffer](#) (int, int, int)
- int [TakeIDfunction](#) (PHEAD WORD *, int)
- int [MakeSetupAllocs](#) (void)
- int [TryFileSetups](#) (void)
- void [ExchangeExpressions](#) (int, int)
- void [ExchangeDollars](#) (int, int)
- int [GetFirstBracket](#) (WORD *, int)
- int [GetFirstTerm](#) (WORD *, int, int)
- int [GetContent](#) (WORD *, int)
- int [CleanupTerm](#) (WORD *)
- WORD [ContentMerge](#) (PHEAD WORD *, WORD *)
- UBYTE * [PrelfDollarEval](#) (UBYTE *, int *)
- LONG [TermsInDollar](#) (WORD)
- LONG [SizeOfDollar](#) (WORD)
- LONG [TermsInExpression](#) (WORD)
- LONG [SizeOfExpression](#) (WORD)
- WORD * [TranslateExpression](#) (UBYTE *)
- int [IsSetMember](#) (WORD *, WORD)
- int [IsMultipleOf](#) (WORD *, WORD *)
- int [TwoExprCompare](#) (WORD *, WORD *, int)
- void [UpdatePositions](#) (void)
- void [M_check](#) (void)
- void [M_print](#) (void)
- void [M_check1](#) (void)
- void [PrintTime](#) (UBYTE *)
- POSITION * [FindBracket](#) (WORD, WORD *)
- void [PutBracketInIndex](#) (PHEAD WORD *, POSITION *)
- void [ClearBracketIndex](#) (WORD)
- void [OpenBracketIndex](#) (WORD)
- int [DoNoParallel](#) (UBYTE *)
- int [DoParallel](#) (UBYTE *)
- int [DoModSum](#) (UBYTE *)
- int [DoModMax](#) (UBYTE *)
- int [DoModMin](#) (UBYTE *)
- int [DoModLocal](#) (UBYTE *)
- UBYTE * [DoModDollar](#) (UBYTE *, int)
- int [DoProcessBucket](#) (UBYTE *)
- int [DoinParallel](#) (UBYTE *)
- int [DonotinParallel](#) (UBYTE *)
- int [FlipTable](#) (FUNCTIONS, int)
- int [ChainIn](#) (PHEAD WORD *, WORD)
- int [ChainOut](#) (PHEAD WORD *, WORD)
- int [ArgumentImplode](#) (PHEAD WORD *, WORD *)
- int [ArgumentExplode](#) (PHEAD WORD *, WORD *)
- int [DenToFunction](#) (WORD *, WORD)
- WORD [HowMany](#) (PHEAD WORD *, WORD *)
- void [RemoveDollars](#) (void)
- LONG [CountTerms1](#) (PHEAD0)
- LONG [TermsInBracket](#) (PHEAD WORD *, WORD)
- int [Crash](#) (void)
- char * [str_dup](#) (char *)
- void [convertblock](#) (INDEXBLOCK *, INDEXBLOCK *, int)
- void [convertnamesblock](#) (NAMESBLOCK *, NAMESBLOCK *, int)
- void [convertiniinfo](#) (INIINFO *, INIINFO *, int)
- int [ReadIndex](#) (DBASE *)

- int [WriteIndexBlock](#) (DBASE *, MLONG)
- int [WriteNamesBlock](#) (DBASE *, MLONG)
- int [WriteIndex](#) (DBASE *)
- int [WriteNilInfo](#) (DBASE *)
- int [ReadNilInfo](#) (DBASE *)
- int [AddToIndex](#) (DBASE *, MLONG)
- DBASE * [GetDbase](#) (char *, MLONG)
- DBASE * [OpenDbase](#) (char *)
- char * [ReadObject](#) (DBASE *, MLONG, char *)
- char * [ReadijObject](#) (DBASE *, MLONG, MLONG, char *)
- int [ExistsObject](#) (DBASE *, MLONG, char *)
- int [DeleteObject](#) (DBASE *, MLONG, char *)
- int [WriteObject](#) (DBASE *, MLONG, char *, char *, MLONG)
- MLONG [AddObject](#) (DBASE *, MLONG, char *, char *)
- DBASE * [NewDbase](#) (char *, MLONG)
- void [FreeTableBase](#) (DBASE *)
- int [ComposeTableNames](#) (DBASE *)
- int [PutTableNames](#) (DBASE *)
- MLONG [AddTableName](#) (DBASE *, char *, TABLES)
- MLONG [GetTableName](#) (DBASE *, char *)
- MLONG [FindTableNumber](#) (DBASE *, char *)
- int [TryEnvironment](#) (void)
- int [CopyExpression](#) (FILEHANDLE *, FILEHANDLE *)
- int [set_in](#) (UBYTE, set_of_char)
- one_byte set_set (UBYTE, set_of_char)
- one_byte set_del (UBYTE, set_of_char)
- one_byte set_sub (set_of_char, set_of_char, set_of_char)
- int [DoPreAddSeparator](#) (UBYTE *)
- int [DoPreRmSeparator](#) (UBYTE *)
- int [openExternalChannel](#) (UBYTE *, int, UBYTE *, UBYTE *)
- int [initPresetExternalChannels](#) (UBYTE *, int)
- int [closeExternalChannel](#) (int)
- int [selectExternalChannel](#) (int)
- int [getCurrentExternalChannel](#) (void)
- void [closeAllExternalChannels](#) (void)
- UBYTE * [defineChannel](#) (UBYTE *, HANDLERS *)
- int [writeToChannel](#) (int, UBYTE *, HANDLERS *)
- int [writeBufToExtChannelOk](#) (char *, size_t)
- int [getcFromExtChannelOk](#) (void)
- int [setKillModeForExternalChannelOk](#) (int, int)
- int [setTerminatorForExternalChannelOk](#) (char *)
- int [getcFromExtChannelFailure](#) (void)
- int [setKillModeForExternalChannelFailure](#) (int, int)
- int [setTerminatorForExternalChannelFailure](#) (char *)
- int [writeBufToExtChannelFailure](#) (char *, size_t)
- int [ReleaseTB](#) (void)
- int [SymbolNormalize](#) (WORD *)
- int [TestFunFlag](#) (PHEAD WORD *)
- WORD [CompareSymbols](#) (PHEAD WORD *, WORD *, WORD)
- WORD [CompareHSymbols](#) (PHEAD WORD *, WORD *, WORD)
- WORD [NextPrime](#) (PHEAD WORD)
- WORD [Moebius](#) (PHEAD WORD)
- UWORD [wranf](#) (PHEAD0)
- UWORD [iranf](#) (PHEAD UWORD)
- void [iniwranf](#) (PHEAD0)

- UBYTE * [PreRandom](#) (UBYTE *)
- WORD * [PolyNormPoly](#) (PHEAD WORD)
- WORD * [EvaluateGcd](#) (PHEAD WORD *)
- int [TreatPolyRatFun](#) (PHEAD WORD *)
- int [ReadSaveHeader](#) (void)
- LONG [ReadSaveIndex](#) ([FILEINDEX](#) *)
- LONG [ReadSaveExpression](#) (UBYTE *, UBYTE *, LONG *, LONG *)
- UBYTE * [ReadSaveTerm32](#) (UBYTE *, UBYTE *, UBYTE **, UBYTE *, UBYTE *, int)
- LONG [ReadSaveVariables](#) (UBYTE *, UBYTE *, LONG *, LONG *, [INDEXENTRY](#) *, LONG *)
- LONG [WriteStoreHeader](#) (WORD)
- void [InitRecovery](#) (void)
- int [CheckRecoveryFile](#) (void)
- void [DeleteRecoveryFile](#) (void)
- char * [RecoveryFilename](#) (void)
- int [DoRecovery](#) (int *)
- void [DoCheckpoint](#) (int)
- void [NumberMallocAddMemory](#) (PHEAD0)
- void [CacheNumberMallocAddMemory](#) (PHEAD0)
- void [TermMallocAddMemory](#) (PHEAD0)
- void [ExprStatus](#) ([EXPRESSIONS](#))
- void [iniTools](#) (void)
- int [TestTerm](#) (WORD *)
- int [RunTransform](#) (PHEAD WORD *term, WORD *params)
- int [RunEncode](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunDecode](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunReplace](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunImplode](#) (WORD *fun, WORD *args)
- int [RunExplode](#) (PHEAD WORD *fun, WORD *args)
- int [TestArgNum](#) (int n, int totarg, WORD *args)
- WORD [PutArgInScratch](#) (WORD *arg, UWORD *scrat)
- UBYTE * [ReadRange](#) (UBYTE *s, WORD *out, int par)
- int [FindRange](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [RunPermute](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunReverse](#) (PHEAD WORD *fun, WORD *args)
- int [RunCycle](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunAddArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunMulArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunIsLyndon](#) (PHEAD WORD *fun, WORD *args, int par)
- WORD [RunToLyndon](#) (PHEAD WORD *fun, WORD *args, int par)
- int [RunDropArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunSelectArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunDedup](#) (PHEAD WORD *fun, WORD *args)
- int [RunZtoHArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunHtoZArg](#) (PHEAD WORD *fun, WORD *args)
- int [NormPolyTerm](#) (PHEAD WORD *)
- WORD [ComparePoly](#) (WORD *, WORD *, WORD)
- int [ConvertToPoly](#) (PHEAD WORD *, WORD *, WORD *, WORD)
- int [LocalConvertToPoly](#) (PHEAD WORD *, WORD *, WORD, WORD)
- int [ConvertFromPoly](#) (PHEAD WORD *, WORD *, WORD, WORD, WORD, WORD)
- int [FindSubterm](#) (WORD *)
- int [FindLocalSubterm](#) (PHEAD WORD *, WORD)
- void [PrintSubtermList](#) (int, int)
- void [PrintExtraSymbol](#) (int, WORD *, int)
- int [FindSubexpression](#) (WORD *)
- void [UpdateMaxSize](#) (void)

- int [CoToPolynomial](#) (UBYTE *)
- int [CoFromPolynomial](#) (UBYTE *)
- int [CoArgToExtraSymbol](#) (UBYTE *)
- int [CoExtraSymbols](#) (UBYTE *)
- UBYTE * [GetDoParam](#) (UBYTE *, WORD **, int)
- WORD * [GetIfDollarFactor](#) (UBYTE **, WORD *)
- int [CoDo](#) (UBYTE *)
- int [CoEndDo](#) (UBYTE *)
- int [ExtraSymFun](#) (PHEAD WORD *, WORD)
- int [PruneExtraSymbols](#) (WORD)
- int [IniFbuffer](#) (WORD)
- void [IniFbufs](#) (void)
- int [GCDfunction](#) (PHEAD WORD *, WORD)
- WORD * [GCDfunction3](#) (PHEAD WORD *, WORD *)
- int [ReadPolyRatFun](#) (PHEAD WORD *)
- int [FromPolyRatFun](#) (PHEAD WORD *, WORD **, WORD **)
- WORD * [PolyDiv](#) (PHEAD WORD *, WORD *, char *)
- void [GCDclean](#) (PHEAD WORD *, WORD *)
- WORD * [TakeSymbolContent](#) (PHEAD WORD *, WORD *)
- int [GCDterms](#) (PHEAD WORD *, WORD *, WORD *)
- WORD * [PutExtraSymbols](#) (PHEAD WORD *, WORD, int *)
- WORD * [TakeExtraSymbols](#) (PHEAD WORD *, WORD)
- WORD * [MultiplyWithTerm](#) (PHEAD WORD *, WORD *, WORD)
- WORD * [TakeContent](#) (PHEAD WORD *, WORD *)
- int [MergeSymbolLists](#) (PHEAD WORD *, WORD *, int)
- int [MergeDotproductLists](#) (PHEAD WORD *, WORD *, int)
- WORD * [CreateExpression](#) (PHEAD WORD)
- int [DIVfunction](#) (PHEAD WORD *, WORD, int)
- WORD * [MULfunc](#) (PHEAD WORD *, WORD *)
- WORD * [ConvertArgument](#) (PHEAD WORD *, int *)
- int [ExpandRat](#) (PHEAD WORD *)
- int [InvPoly](#) (PHEAD WORD *, WORD, WORD)
- WORD [TestDoLoop](#) (PHEAD WORD *, WORD)
- WORD [TestEndDoLoop](#) (PHEAD WORD *, WORD)
- WORD * [poly_gcd](#) (PHEAD WORD *, WORD *, WORD)
- WORD * [poly_div](#) (PHEAD WORD *, WORD *, WORD)
- WORD * [poly_rem](#) (PHEAD WORD *, WORD *, WORD)
- WORD * [poly_inverse](#) (PHEAD WORD *, WORD *)
- WORD * [poly_mul](#) (PHEAD WORD *, WORD *)
- WORD * [poly_ratfun_add](#) (PHEAD WORD *, WORD *)
- int [poly_ratfun_normalize](#) (PHEAD WORD *)
- int [poly_factorize_argument](#) (PHEAD WORD *, WORD *)
- WORD * [poly_factorize_dollar](#) (PHEAD WORD *)
- int [poly_factorize_expression](#) (EXPRESSIONS)
- int [poly_unfactorize_expression](#) (EXPRESSIONS)
- void [poly_free_poly_vars](#) (PHEAD const char *)
- void [optimize_print_code](#) (int)
- int [DoPreAdd](#) (UBYTE *s)
- int [DoPreUseDictionary](#) (UBYTE *s)
- int [DoPreCloseDictionary](#) (UBYTE *s)
- int [DoPreOpenDictionary](#) (UBYTE *s)
- void [RemoveDictionary](#) (DICTIONARY *dict)
- void [UnSetDictionary](#) (void)
- int [SetDictionaryOptions](#) (UBYTE *options)
- int [AddToDictionary](#) (DICTIONARY *dict, UBYTE *left, UBYTE *right)

- int [AddDictionary](#) (UBYTE *name)
- int [FindDictionary](#) (UBYTE *name)
- UBYTE * [IsExponentSign](#) (void)
- UBYTE * [IsMultiplySign](#) (void)
- void [TransformRational](#) (UWORD *a, WORD na)
- void [WriteDictionary](#) (DICTIONARY *)
- void [ShrinkDictionary](#) (DICTIONARY *)
- void [MultiplyToLine](#) (void)
- UBYTE * [FindSymbol](#) (WORD num)
- UBYTE * [FindVector](#) (WORD num)
- UBYTE * [FindIndex](#) (WORD num)
- UBYTE * [FindFunction](#) (WORD num)
- UBYTE * [FindFunWithArgs](#) (WORD *t)
- UBYTE * [FindExtraSymbol](#) (WORD num)
- LONG [DictToBytes](#) (DICTIONARY *dict, UBYTE *buf)
- DICTIONARY * [DictFromBytes](#) (UBYTE *buf)
- int [CoCreateSpectator](#) (UBYTE *inp)
- int [CoToSpectator](#) (UBYTE *inp)
- int [CoRemoveSpectator](#) (UBYTE *inp)
- int [CoEmptySpectator](#) (UBYTE *inp)
- int [CoCopySpectator](#) (UBYTE *inp)
- int [PutInSpectator](#) (WORD *, WORD)
- void [ClearSpectators](#) (WORD)
- WORD [GetFromSpectator](#) (WORD *, WORD)
- void [FlushSpectators](#) (void)
- WORD * [PreGCD](#) (PHEAD WORD *, WORD *, int)
- int [ReadFromScratch](#) (FILEHANDLE *, POSITION *, UBYTE *, POSITION *)
- int [AddToScratch](#) (FILEHANDLE *, POSITION *, UBYTE *, POSITION *, int)
- int [DoPreAppendPath](#) (UBYTE *)
- int [DoPrePrependPath](#) (UBYTE *)
- int [DoSwitch](#) (PHEAD WORD *, WORD *)
- int [DoEndSwitch](#) (PHEAD WORD *, WORD *)
- SWITCHTABLE * [FindCase](#) (WORD, WORD)
- void [SwitchSplitMergeRec](#) (SWITCHTABLE *, WORD, SWITCHTABLE *)
- void [SwitchSplitMerge](#) (SWITCHTABLE *, WORD)
- int [DoubleSwitchBuffers](#) (void)
- int [DistrN](#) (int, int *, int, int *)
- int [DoNamespace](#) (UBYTE *)
- int [DoEndNamespace](#) (UBYTE *)
- int [DoUse](#) (UBYTE *)
- UBYTE * [SkipName](#) (UBYTE *)
- UBYTE * [ConstructName](#) (UBYTE *, UBYTE)
- int [DoSetUserFlag](#) (UBYTE *)
- int [DoClearUserFlag](#) (UBYTE *)
- VERTEX * [CreateVertex](#) (MODEL *)
- UBYTE * [ReadParticle](#) (UBYTE *, VERTEX *, MODEL *, int)
- int [CoModel](#) (UBYTE *)
- int [CoParticle](#) (UBYTE *)
- int [CoVertex](#) (UBYTE *)
- int [CoEndModel](#) (UBYTE *)
- int [LoadModel](#) (MODEL *)
- int [CoSetUserFlag](#) (UBYTE *)
- int [CoClearUserFlag](#) (UBYTE *)
- int [CoCreateAllLoops](#) (UBYTE *)
- int [CoCreateAllPaths](#) (UBYTE *)

- int [CoCreateAll](#) (UBYTE *)
- int [AllLoops](#) (PHEAD WORD *, WORD)
- LONG [StartLoops](#) (PHEAD WORD *, WORD, LONG, WORD, WORD *, WORD, WORD *, WORD)
- LONG [GenLoops](#) (PHEAD WORD *, WORD, LONG, WORD, WORD *, WORD, WORD *, WORD)
- void [LoopOutput](#) (PHEAD WORD *, WORD, WORD *, WORD)
- int [AllPaths](#) (PHEAD WORD *, WORD)
- LONG [GenPaths](#) (PHEAD WORD *, WORD, LONG, WORD, WORD *, WORD, WORD *, WORD)
- void [PathOutput](#) (PHEAD WORD *, WORD, WORD *, WORD)

4.19.1 Detailed Description

Contains macros and function declarations.

Definition in file [declare.h](#).

4.19.2 Macro Definition Documentation

4.19.2.1 MaX

```
#define MaX(
    x,
    y ) ((x) > (y) ? (x) : (y))
```

Definition at line 40 of file [declare.h](#).

4.19.2.2 MiN

```
#define MiN(
    x,
    y ) ((x) < (y) ? (x) : (y))
```

Definition at line 41 of file [declare.h](#).

4.19.2.3 ABS

```
#define ABS(
    x ) ((x) < 0 ? -(x) : (x))
```

Definition at line 42 of file [declare.h](#).

4.19.2.4 SGN

```
#define SGN(
    x ) ((x) > 0 ? 1 : (x) < 0 ? -1 : 0)
```

Definition at line 43 of file [declare.h](#).

4.19.2.5 REDLENG

```
#define REDLENG(  
    x )  ( ( (x)<0) ? ( (x)+1) : ( (x)-1) ) / 2)
```

Definition at line 44 of file [declare.h](#).

4.19.2.6 INCLENG

```
#define INCLENG(  
    x )  ( ( (x)<0) ? ( (x)*2)-1) : ( (x)*2)+1)
```

Definition at line 45 of file [declare.h](#).

4.19.2.7 GETCOEF

```
#define GETCOEF(  
    x,  
    y )  x += *x; y = x[-1]; x -= ABS(y); y=REDLENG(y)
```

Definition at line 46 of file [declare.h](#).

4.19.2.8 GETSTOP

```
#define GETSTOP(  
    x,  
    y )  y=x+(*x)-1; y -= ABS(*y)-1
```

Definition at line 47 of file [declare.h](#).

4.19.2.9 StuffAdd

```
#define StuffAdd(  
    x,  
    y )  ( ( (x)<0?-1:1)* (y) + ( (y)<0?-1:1)* (x) )
```

Definition at line 48 of file [declare.h](#).

4.19.2.10 EXCHN

```
#define EXCHN(  
    t1,  
    t2,  
    n )  { WORD a,i; for(i=0;i<n;i++){a=t1[i];t1[i]=t2[i];t2[i]=a;} }
```

Definition at line 50 of file [declare.h](#).

4.19.2.11 EXCH

```
#define EXCH(  
    x,  
    y ) { WORD a = (x); (x) = (y); (y) = a; }
```

Definition at line 51 of file [declare.h](#).

4.19.2.12 TOKENTOLINE

```
#define TOKENTOLINE(  
    x,  
    y )
```

Value:

```
if ( AC.OutputSpaces == NOSPACEFORMAT ) { \  
TokenToLine((UBYTE *) (y)); } else { TokenToLine((UBYTE *) (x)); }
```

Definition at line 53 of file [declare.h](#).

4.19.2.13 UngetFromStream

```
#define UngetFromStream(  
    stream,  
    c ) ((stream)->nextchar[(stream)->isnextchar++]=c)
```

Definition at line 56 of file [declare.h](#).

4.19.2.14 AddLineFeed

```
#define AddLineFeed(  
    s,  
    n ) { (s)[(n)++] = LINEFEED; }
```

Definition at line 60 of file [declare.h](#).

4.19.2.15 TryRecover

```
#define TryRecover(  
    x ) Terminate(-1)
```

Definition at line 62 of file [declare.h](#).

4.19.2.16 UngetChar

```
#define UngetChar(  
    c ) { pushbackchar = c; }
```

Definition at line 63 of file [declare.h](#).

4.19.2.17 ParseNumber

```
#define ParseNumber(  
    x,  
    s ) { (x)=0;while(*(s)>='0'&&*(s)<='9') (x)=10*(x)+*(s)++ -'0'; }
```

Definition at line 64 of file [declare.h](#).

4.19.2.18 ParseSign

```
#define ParseSign(  
    sgn,  
    s )
```

Value:

```
{ (sgn)=0;while(*(s)=='-' || *(s)=='+') {\n  if ( *(s)++ == '-' ) sgn ^= 1;}}
```

Definition at line 65 of file [declare.h](#).

4.19.2.19 ParseSignedNumber

```
#define ParseSignedNumber(  
    x,  
    s )
```

Value:

```
{ int sgn; ParseSign(sgn,s)\n  ParseNumber(x,s) if ( sgn ) x = -x; }
```

Definition at line 67 of file [declare.h](#).

4.19.2.20 NCOPY

```
#define NCOPY(  
    s,  
    t,  
    n ) { while ( (n)-- > 0 ) { *s++ = *t++; } }
```

Definition at line 71 of file [declare.h](#).

4.19.2.21 NCOPYI

```
#define NCOPYI(  
    s,  
    t,  
    n ) { while ( (n)-- > 0 ) { *s++ = *t++; } }
```

Definition at line 73 of file [declare.h](#).

4.19.2.22 NCOPYB

```
#define NCOPYB(
    s,
    t,
    n ) { while ( (n)-- > 0 ) { *s++ = *t++; } }
```

Definition at line 74 of file [declare.h](#).

4.19.2.23 NCOPYI32

```
#define NCOPYI32(
    s,
    t,
    n ) { while ( (n)-- > 0 ) { *s++ = *t++; } }
```

Definition at line 75 of file [declare.h](#).

4.19.2.24 WCOPY

```
#define WCOPY(
    s,
    t,
    n ) { int nn=n; WORD *ss=(WORD *)s, *tt=(WORD *)t; while ( (nn)-- > 0 ) { *ss++ =
    *tt++; } }
```

Definition at line 76 of file [declare.h](#).

4.19.2.25 NeedNumber

```
#define NeedNumber(
    x,
    s,
    err )
```

Value:

```
{ int sgn = 1;
while ( *s == ' ' || *s == '\t' || *s == '-' || *s == '+' ) {
    if ( *s == '-' ) {sgn = -sgn;} s++; }
if ( chartype[*s] != 1 ) goto err;
ParseNumber(x,s)
if ( sgn < 0 ) { (x) = -(x); } while ( *s == ' ' || *s == '\t' ) s++;
}
```

Definition at line 78 of file [declare.h](#).

4.19.2.26 SKIPBLANKS

```
#define SKIPBLANKS(
    s ) { while ( *(s) == ' ' || *(s) == '\t' ) (s)++; }
```

Definition at line 85 of file [declare.h](#).

4.19.2.27 FLUSHCONSOLE

```
#define FLUSHCONSOLE if ( AP.InOutBuf > 0 ) CharOut(LINEFEED)
```

Definition at line 86 of file [declare.h](#).

4.19.2.28 SKIPBRA1

```
#define SKIPBRA1(  
    s )
```

Value:

```
{ int lev1=0; s++; while(*s) { if(*s=='['){lev1++;} \  
else {if(*s=='['&&--lev1<0){break;}} s++;} }
```

Definition at line 88 of file [declare.h](#).

4.19.2.29 SKIPBRA2

```
#define SKIPBRA2(  
    s )
```

Value:

```
{ int lev2=0; s++; while(*s) { if(*s=='{'){lev2++;} \  
else {if(*s=='{'&&--lev2<0){break;}} \  
else {if(*s=='{'){SKIPBRA1(s)}} s++;} }
```

Definition at line 90 of file [declare.h](#).

4.19.2.30 SKIPBRA3

```
#define SKIPBRA3(  
    s )
```

Value:

```
{ int lev3=0; s++; while(*s) { if(*s=='('){lev3++;} \  
else {if(*s=='('&&--lev3<0){break;}} \  
else {if(*s=='('){SKIPBRA2(s)} \  
else {if(*s=='('){SKIPBRA1(s)}}} s++;} }
```

Definition at line 93 of file [declare.h](#).

4.19.2.31 SKIPBRA4

```
#define SKIPBRA4(  
    s )
```

Value:

```
{ int lev4=0; s++; while(*s) { if(*s=='('){lev4++;} \  
else {if(*s=='('&&--lev4<0){break;}} \  
else {if(*s=='('){SKIPBRA1(s)}} s++;} }
```

Definition at line 97 of file [declare.h](#).

4.19.2.32 SKIPBRA5

```
#define SKIPBRA5(
    s )
```

Value:

```
{ int lev5=0; s++; while(*s) { if(*s=='{') {lev5++;} \
else {if(*s=='}') &&--lev5<0} {break;} \
else {if(*s=='(') {SKIPBRA4(s)} \
else {if(*s=='{') {SKIPBRA1(s)}}} s++;} }
```

Definition at line 100 of file [declare.h](#).

4.19.2.33 CYCLE1

```
#define CYCLE1(
    t,
    a,
    i ) {t iX=*a; WORD jX; for(jX=1;jX<i;jX++)a[jX-1]=a[jX]; a[i-1]=iX;}
```

Definition at line 108 of file [declare.h](#).

4.19.2.34 AddToCB

```
#define AddToCB(
    c,
    wx )
```

Value:

```
if(c->Pointer>=c->Top) \
{DoubleCbuffer(c-cbuf,c->Pointer,21);} \
*(c->Pointer)++ = wx;
```

Definition at line 110 of file [declare.h](#).

4.19.2.35 EXCHINOUT

```
#define EXCHINOUT
```

Value:

```
{ FILEHANDLE *ffFi = AR.outfile; \
AR.outfile = AR.infile; AR.infile = ffFi; }
```

Definition at line 114 of file [declare.h](#).

4.19.2.36 BACKINOUT

```
#define BACKINOUT
```

Value:

```
{ FILEHANDLE *ffFi = AR.outfile; POSITION posi; \
AR.outfile = AR.infile; AR.infile = ffFi; \
SetEndScratch(AR.infile,&posi); }
```

Definition at line 116 of file [declare.h](#).

4.19.2.37 CopyArg

```
#define CopyArg(  
    to,  
    from )
```

Value:

```
{ if ( *from > 0 ) { int ica = *from; NCOPY(to,from,ica) } \  
else if ( *from <= -FUNCTION ) *to++ = *from++; \  
else { *to++ = *from++; *to++ = *from++; } }
```

Definition at line 120 of file [declare.h](#).

4.19.2.38 FILLARG

```
#define FILLARG(  
    w )
```

Definition at line 129 of file [declare.h](#).

4.19.2.39 COPYARG

```
#define COPYARG(  
    w,  
    t )
```

Definition at line 130 of file [declare.h](#).

4.19.2.40 ZEROARG

```
#define ZEROARG(  
    w )
```

Definition at line 131 of file [declare.h](#).

4.19.2.41 FILLFUN

```
#define FILLFUN(  
    w )
```

Definition at line 138 of file [declare.h](#).

4.19.2.42 COPYFUN

```
#define COPYFUN(  
    w,  
    t )
```

Definition at line 139 of file [declare.h](#).

4.19.2.43 COPYFUN3

```
#define COPYFUN3(  
    w,  
    t )
```

Definition at line 146 of file [declare.h](#).

4.19.2.44 FILLFUN3

```
#define FILLFUN3(  
    w )
```

Definition at line 147 of file [declare.h](#).

4.19.2.45 FILLSUB

```
#define FILLSUB(  
    w )
```

Definition at line 154 of file [declare.h](#).

4.19.2.46 COPYSUB

```
#define COPYSUB(  
    w,  
    ww )
```

Definition at line 155 of file [declare.h](#).

4.19.2.47 FILLEXP

```
#define FILLEXP(  
    w )
```

Definition at line 161 of file [declare.h](#).

4.19.2.48 NEXTARG

```
#define NEXTARG(  
    x ) if(*x>0) x += *x; else if(*x <= -FUNCTION)x++; else x += 2;
```

Definition at line 164 of file [declare.h](#).

4.19.2.49 COPY1ARG

```
#define COPY1ARG(
    s1,
    t1 )
```

Value:

```
{ int ica; if ( (ica==t1) > 0 ) { NCOPY(s1,t1,ica) } \
  else if(*t1<=-FUNCTION){*s1++=*t1++;} else{*s1++=*t1++;*s1++=*t1++;} }
```

Definition at line 165 of file [declare.h](#).

4.19.2.50 ZeroFillRange

```
#define ZeroFillRange(
    w,
    begin,
    end )
```

Value:

```
do { \
    int tmp_i; \
    for ( tmp_i = begin; tmp_i < end; tmp_i++ ) { (w)[tmp_i] = 0; } \
} while (0)
```

Fills a buffer by zero in the range [begin,end).

Parameters

<i>w</i>	The buffer.
<i>begin</i>	The index for the beginning of the range.
<i>end</i>	The index for the end of the range (exclusive).

Definition at line 175 of file [declare.h](#).

4.19.2.51 TABLESIZE

```
#define TABLESIZE(
    a,
    b ) ( (WORD) sizeof(a) / ( (WORD) sizeof(b) ) )
```

Definition at line 180 of file [declare.h](#).

4.19.2.52 WORDDIF

```
#define WORDDIF(
    x,
    y ) (WORD) (x-y)
```

Definition at line 181 of file [declare.h](#).

4.19.2.53 **wsizetof**

```
#define wsizetof(  
    a ) ((WORD)sizeof(a))
```

Definition at line 182 of file [declare.h](#).

4.19.2.54 **VARNAME**

```
#define VARNAME(  
    type,  
    num ) (AC.varnames->namebuffer+type[num].name)
```

Definition at line 183 of file [declare.h](#).

4.19.2.55 **DOLLARNAME**

```
#define DOLLARNAME(  
    type,  
    num ) (AC.dollarnames->namebuffer+type[num].name)
```

Definition at line 184 of file [declare.h](#).

4.19.2.56 **EXPRNAME**

```
#define EXPRNAME(  
    num ) (AC.exprnames->namebuffer+Expressions[num].name)
```

Definition at line 185 of file [declare.h](#).

4.19.2.57 **PREV**

```
#define PREV(  
    x ) prevorder?prevorder:x
```

Definition at line 187 of file [declare.h](#).

4.19.2.58 **Terminate**

```
#define Terminate(  
    x ) do { TerminateImpl(x, __FILE__, __LINE__, __FUNCTION__); } while(0)
```

Definition at line 189 of file [declare.h](#).

4.19.2.59 **SETERROR**

```
#define SETERROR(  
    x ) { Terminate(-1); return(-1); }
```

Definition at line 190 of file [declare.h](#).

4.19.2.60 DUMMYUSE

```
#define DUMMYUSE(  
    x ) (void) (x);
```

Definition at line 193 of file [declare.h](#).

4.19.2.61 ADDPOS

```
#define ADDPOS(  
    pp,  
    x ) (pp).p1 = ((pp).p1+(LONG)(x))
```

Definition at line 219 of file [declare.h](#).

4.19.2.62 SETBASELENGTH

```
#define SETBASELENGTH(  
    ss,  
    x ) (ss).p1 = (LONG)(x)
```

Definition at line 220 of file [declare.h](#).

4.19.2.63 SETBASEPOSITION

```
#define SETBASEPOSITION(  
    pp,  
    x ) (pp).p1 = (LONG)(x)
```

Definition at line 221 of file [declare.h](#).

4.19.2.64 ISEQUALPOSINC

```
#define ISEQUALPOSINC(  
    pp1,  
    pp2,  
    x ) ((pp1).p1 == ((pp2).p1+(LONG)(x)) )
```

Definition at line 222 of file [declare.h](#).

4.19.2.65 ISGEPOSINC

```
#define ISGEPOSINC(  
    pp1,  
    pp2,  
    x ) ((pp1).p1 >= ((pp2).p1+(LONG)(x)) )
```

Definition at line 223 of file [declare.h](#).

4.19.2.66 DIVPOS

```
#define DIVPOS(  
    pp,  
    n ) ( (pp).p1 / (LONG) (n) )
```

Definition at line 224 of file [declare.h](#).

4.19.2.67 MULPOS

```
#define MULPOS(  
    pp,  
    n ) (pp).p1 *= (LONG) (n)
```

Definition at line 225 of file [declare.h](#).

4.19.2.68 DIFPOS

```
#define DIFPOS(  
    ss,  
    pp1,  
    pp2 ) (ss).p1 = ((pp1).p1 - (pp2).p1)
```

Definition at line 228 of file [declare.h](#).

4.19.2.69 DIFBASE

```
#define DIFBASE(  
    pp1,  
    pp2 ) ((pp1).p1 - (pp2).p1)
```

Definition at line 229 of file [declare.h](#).

4.19.2.70 ADD2POS

```
#define ADD2POS(  
    pp1,  
    pp2 ) (pp1).p1 += (pp2).p1
```

Definition at line 230 of file [declare.h](#).

4.19.2.71 PUTZERO

```
#define PUTZERO(  
    pp ) (pp).p1 = 0
```

Definition at line 231 of file [declare.h](#).

4.19.2.72 BASEPOSITION

```
#define BASEPOSITION(  
    pp ) ( (pp).p1 )
```

Definition at line 232 of file [declare.h](#).

4.19.2.73 SETSTARTPOS

```
#define SETSTARTPOS(  
    pp ) (pp).p1 = -2
```

Definition at line 233 of file [declare.h](#).

4.19.2.74 NOTSTARTPOS

```
#define NOTSTARTPOS(  
    pp ) ( (pp).p1 > -2 )
```

Definition at line 234 of file [declare.h](#).

4.19.2.75 ISMINPOS

```
#define ISMINPOS(  
    pp ) ( (pp).p1 == -1 )
```

Definition at line 235 of file [declare.h](#).

4.19.2.76 ISEQUALPOS

```
#define ISEQUALPOS(  
    pp1,  
    pp2 ) ( (pp1).p1 == (pp2).p1 )
```

Definition at line 236 of file [declare.h](#).

4.19.2.77 ISNOTEQUALPOS

```
#define ISNOTEQUALPOS(  
    pp1,  
    pp2 ) ( (pp1).p1 != (pp2).p1 )
```

Definition at line 237 of file [declare.h](#).

4.19.2.78 ISLESSPOS

```
#define ISLESSPOS(  
    pp1,  
    pp2 ) ( (pp1).p1 < (pp2).p1 )
```

Definition at line 238 of file [declare.h](#).

4.19.2.79 ISGEPOS

```
#define ISGEPOS(  
    pp1,  
    pp2 ) ( (pp1).p1 >= (pp2).p1 )
```

Definition at line 239 of file [declare.h](#).

4.19.2.80 ISNOTZEROPOS

```
#define ISNOTZEROPOS(  
    pp ) ( (pp).p1 != 0 )
```

Definition at line 240 of file [declare.h](#).

4.19.2.81 ISZEROPOS

```
#define ISZEROPOS(  
    pp ) ( (pp).p1 == 0 )
```

Definition at line 241 of file [declare.h](#).

4.19.2.82 ISPOSPOS

```
#define ISPOSPOS(  
    pp ) ( (pp).p1 > 0 )
```

Definition at line 242 of file [declare.h](#).

4.19.2.83 ISNEGPOS

```
#define ISNEGPOS(  
    pp ) ( (pp).p1 < 0 )
```

Definition at line 243 of file [declare.h](#).

4.19.2.84 TOLONG

```
#define TOLONG(  
    x ) ( (LONG) (x) )
```

Definition at line 246 of file [declare.h](#).

4.19.2.85 Add2Com

```
#define Add2Com(  
    x ) { WORD cod[2]; cod[0] = x; cod[1] = 2; AddNtoL(2,cod); }
```

Definition at line 248 of file [declare.h](#).

4.19.2.86 Add3Com

```
#define Add3Com(  
    x1,  
    x2 ) { WORD cod[3]; cod[0] = x1; cod[1] = 3; cod[2] = x2; AddNtoL(3,cod); }
```

Definition at line 249 of file [declare.h](#).

4.19.2.87 Add4Com

```
#define Add4Com(  
    x1,  
    x2,  
    x3 )
```

Value:

```
{ WORD cod[4]; cod[0] = x1; cod[1] = 4; \  
cod[2] = x2; cod[3] = x3; AddNtoL(4,cod); }
```

Definition at line 250 of file [declare.h](#).

4.19.2.88 Add5Com

```
#define Add5Com(  
    x1,  
    x2,  
    x3,  
    x4 )
```

Value:

```
{ WORD cod[5]; cod[0] = x1; cod[1] = 5; \  
cod[2] = x2; cod[3] = x3; cod[4] = x4; AddNtoL(5,cod); }
```

Definition at line 252 of file [declare.h](#).

4.19.2.89 WantAddPointers

```
#define WantAddPointers(  
    x )
```

Value:

```
while((AT.pWorkPointer+(x))>AR.pWorkSize){WORD ***ppp=&AT.pWorkSpace;\  
ExpandBuffer((void **)ppp,&AR.pWorkSize,(int)(sizeof(WORD *)));}
```

Definition at line 258 of file [declare.h](#).

4.19.2.90 WantAddLongs

```
#define WantAddLongs(  
    x )
```

Value:

```
while ( (AT.lWorkPointer+(x))>AR.lWorkSize) {LONG **ppp=&AT.lWorkSpace;\nExpandBuffer((void **)ppp, &AR.lWorkSize, sizeof(LONG));}
```

Definition at line 260 of file [declare.h](#).

4.19.2.91 WantAddPositions

```
#define WantAddPositions(  
    x )
```

Value:

```
while ( (AT.posWorkPointer+(x))>AR.posWorkSize) {POSITION **ppp=&AT.posWorkSpace;\nExpandBuffer((void **)ppp, &AR.posWorkSize, sizeof(POSITION));}
```

Definition at line 262 of file [declare.h](#).

4.19.2.92 FORM_INLINE

```
#define FORM_INLINE inline
```

Definition at line 266 of file [declare.h](#).

4.19.2.93 MEMORYMACROS

```
#define MEMORYMACROS
```

Definition at line 274 of file [declare.h](#).

4.19.2.94 TermMalloc

```
#define TermMalloc(  
    x ) ( (AT.TermMemTop <= 0 ) ? TermMallocAddMemory(BHEAD0), AT.TermMemHeap[--AT.TermMemTop]: AT.TermMemHeap[--AT.TermMemTop] )
```

Definition at line 278 of file [declare.h](#).

4.19.2.95 NumberMalloc

```
#define NumberMalloc(  
    x ) ( (AT.NumberMemTop <= 0 ) ? NumberMallocAddMemory(BHEAD0), AT.NumberMemHeap[--AT.NumberMemTop]: AT.NumberMemHeap[--AT.NumberMemTop] )
```

Definition at line 279 of file [declare.h](#).

4.19.2.96 CacheNumberMalloc

```
#define CacheNumberMalloc(  
    x ) ( (AT.CacheNumberMemTop <= 0 ) ? CacheNumberMallocAddMemory(BHEAD0), AT.↵  
CacheNumberMemHeap[--AT.CacheNumberMemTop]: AT.CacheNumberMemHeap[--AT.CacheNumberMemTop] )
```

Definition at line 280 of file [declare.h](#).

4.19.2.97 TermFree

```
#define TermFree(  
    TermMem,  
    x ) AT.TermMemHeap[AT.TermMemTop++] = (WORD *) (TermMem)
```

Definition at line 281 of file [declare.h](#).

4.19.2.98 NumberFree

```
#define NumberFree(  
    NumberMem,  
    x ) AT.NumberMemHeap[AT.NumberMemTop++] = (UWORD *) (NumberMem)
```

Definition at line 282 of file [declare.h](#).

4.19.2.99 CacheNumberFree

```
#define CacheNumberFree(  
    NumberMem,  
    x ) AT.CacheNumberMemHeap[AT.CacheNumberMemTop++] = (UWORD *) (NumberMem)
```

Definition at line 283 of file [declare.h](#).

4.19.2.100 NestingChecksum

```
#define NestingChecksum( ) (AC.IfLevel + AC.RepLevel + AC.arglevel + AC.insidelevel + AC.↵  
termlevel + AC.inexprlevel + AC.dolooplevel + AC.SwitchLevel)
```

Definition at line 311 of file [declare.h](#).

4.19.2.101 MesNesting

```
#define MesNesting( ) MesPrint("&Illegal nesting of if, repeat, argument, inside, term, inexpression  
and do")
```

Definition at line 312 of file [declare.h](#).

4.19.2.102 MarkPolyRatFunDirty

```
#define MarkPolyRatFunDirty(
    T )
```

Value:

```
{if(*T&&AR.PolyFunType==2){WORD *TP,*TT;TT=T+*T;TT-=ABS(TT[-1]);\
TP=T+1;while(TP<TT){if(*TP==AR.PolyFun){TP[2]|=(DIRTYFLAG|MUSTCLEANPRF);}TP+=TP[1];}}}
```

Definition at line 314 of file [declare.h](#).

4.19.2.103 PUSHPREASSIGNLEVEL

```
#define PUSHPREASSIGNLEVEL
```

Value:

```
AP.PreAssignLevel++; { GETIDENTITY \
if ( AP.PreAssignLevel >= AP.MaxPreAssignLevel ) { int i; \
LONG *ap = (LONG *)Malloc1(2*AP.MaxPreAssignLevel*sizeof(LONG *),"PreAssignStack"); \
for ( i = 0; i < AP.MaxPreAssignLevel; i++ ) ap[i] = AP.PreAssignStack[i]; \
M_free(AP.PreAssignStack,"PreAssignStack"); \
AP.MaxPreAssignLevel *= 2; AP.PreAssignStack = ap; \
} \
*AT.WorkPointer++ = AP.PreContinuation; AP.PreContinuation = 0; \
AP.PreAssignStack[AP.PreAssignLevel] = AC.iPointer - AC.iBuffer; }
```

Definition at line 321 of file [declare.h](#).

4.19.2.104 POPPREASSIGNLEVEL

```
#define POPPREASSIGNLEVEL
```

Value:

```
if ( AP.PreAssignLevel > 0 ) { GETIDENTITY \
AC.iPointer = AC.iBuffer + AP.PreAssignStack[AP.PreAssignLevel--]; \
AP.PreContinuation = ---AT.WorkPointer; \
*AC.iPointer = 0; }
```

Definition at line 331 of file [declare.h](#).

4.19.2.105 EXTERNLOCK

```
#define EXTERNLOCK(
    x )
```

NOTE: We have replaced LOCK(ErrorMessageLock) and UNLOCK(ErrorMessageLock) by MLOCK(ErrorMessageLock) and MUNLOCK(ErrorMessageLock). They are used for the synchronised output in ParFORM. (TU 28 May 2011)

Definition at line 477 of file [declare.h](#).

4.19.2.106 INILOCK

```
#define INILOCK(
    x )
```

Definition at line 478 of file [declare.h](#).

4.19.2.107 LOCK

```
#define LOCK(  
    x )
```

Definition at line 479 of file [declare.h](#).

4.19.2.108 UNLOCK

```
#define UNLOCK(  
    x )
```

Definition at line 480 of file [declare.h](#).

4.19.2.109 EXTERNRWLOCK

```
#define EXTERNRWLOCK(  
    x )
```

Definition at line 481 of file [declare.h](#).

4.19.2.110 INIRWLOCK

```
#define INIRWLOCK(  
    x )
```

Definition at line 482 of file [declare.h](#).

4.19.2.111 RWLOCKR

```
#define RWLOCKR(  
    x )
```

Definition at line 483 of file [declare.h](#).

4.19.2.112 RWLOCKW

```
#define RWLOCKW(  
    x )
```

Definition at line 484 of file [declare.h](#).

4.19.2.113 UNRWLOCK

```
#define UNRWLOCK(  
    x )
```

Definition at line 485 of file [declare.h](#).

4.19.2.114 MLOCK

```
#define MLOCK(  
    x )
```

Definition at line 490 of file [declare.h](#).

4.19.2.115 MUNLOCK

```
#define MUNLOCK(  
    x )
```

Definition at line 491 of file [declare.h](#).

4.19.2.116 GETIDENTITY

```
#define GETIDENTITY
```

Definition at line 493 of file [declare.h](#).

4.19.2.117 GETBIDENTITY

```
#define GETBIDENTITY
```

Definition at line 494 of file [declare.h](#).

4.19.2.118 M_alloc

```
#define M_alloc(  
    x ) malloc((size_t)(x))
```

Definition at line 1006 of file [declare.h](#).

4.19.2.119 CompareTerms

```
#define CompareTerms ((COMPARE)AR.CompareRoutine)
```

Definition at line 1467 of file [declare.h](#).

4.19.2.120 FiniShuffle

```
#define FiniShuffle AN.SHvar.finishhuf
```

Definition at line 1468 of file [declare.h](#).

4.19.2.121 DoShuffle

```
#define DoShuffle ((DO_UFFLE)AN.SHvar.do_uffle)
```

Definition at line 1469 of file [declare.h](#).

4.19.3 Typedef Documentation

4.19.3.1 WRITEBUFTOEXTCHANNEL

```
typedef int(* WRITEBUFTOEXTCHANNEL) (char *, size_t)
```

Definition at line 1460 of file [declare.h](#).

4.19.3.2 GETCFROMEXTCHANNEL

```
typedef int(* GETCFROMEXTCHANNEL) (void)
```

Definition at line 1461 of file [declare.h](#).

4.19.3.3 SETTERMINATORFOREXTERNALCHANNEL

```
typedef int(* SETTERMINATORFOREXTERNALCHANNEL) (char *)
```

Definition at line 1462 of file [declare.h](#).

4.19.3.4 SETKILLMODEFOREXTERNALCHANNEL

```
typedef int(* SETKILLMODEFOREXTERNALCHANNEL) (int, int)
```

Definition at line 1463 of file [declare.h](#).

4.19.3.5 WRITEFILE

```
typedef LONG(* WRITEFILE) (int, UBYTE *, LONG)
```

Definition at line 1464 of file [declare.h](#).

4.19.3.6 GETTERM

```
typedef WORD(* GETTERM) (PHEAD WORD *)
```

Definition at line 1465 of file [declare.h](#).

4.19.4 Function Documentation

4.19.4.1 TELLFILE()

```
void TELLFILE (
    int handle,
    POSITION * position ) [extern]
```

Definition at line 1408 of file [tools.c](#).

4.19.4.2 StartVariables()


```
void StartVariables (
    void ) [extern]
```

All functions (well, nearly all) are declared here.

Definition at line 905 of file [startup.c](#).

References [AddNtoC\(\)](#), [AddRHS\(\)](#), [Compare1\(\)](#), [inicbufs\(\)](#), [FuNcTiOn::name](#), [PF_BroadcastNumber\(\)](#), [PutPreVar\(\)](#), and [FuNcTiOn::symmetric](#).

Here is the call graph for this function:

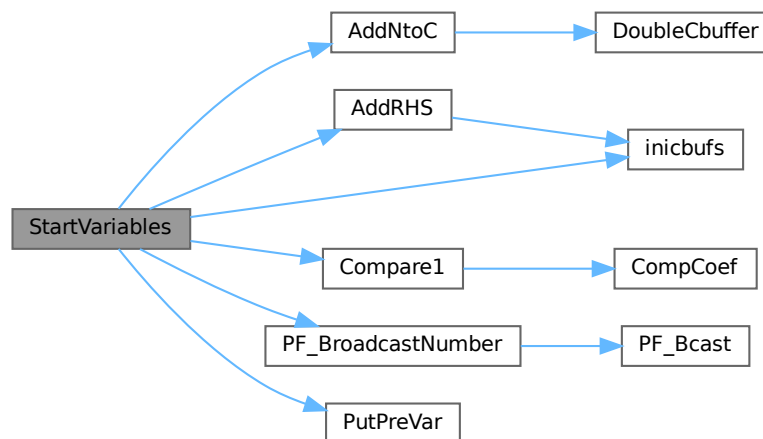

4.19.4.3 CodeToLine()

```
UBYTE * CodeToLine (
    WORD number,
    UBYTE * Out ) [extern]
```

Definition at line 658 of file [sch.c](#).

4.19.4.4 AddArrayIndex()

```

UBYTE * AddArrayIndex (
    WORD num,
    UBYTE * out ) [extern]

```

Definition at line 696 of file [sch.c](#).

4.19.4.5 FindInIndex()

```

INDEXENTRY * FindInIndex (
    WORD expr,
    FILEDATA * f,
    WORD par,
    WORD mode ) [extern]

```

Definition at line 2664 of file [store.c](#).

4.19.4.6 NextFileIndex()

```

INDEXENTRY * NextFileIndex (
    POSITION * indexpos ) [extern]

```

Definition at line 2257 of file [store.c](#).

4.19.4.7 PasteTerm()

```

WORD * PasteTerm (
    PHEAD WORD number,
    WORD * accum,
    WORD * position,
    WORD times,
    WORD divby ) [extern]

```

Puts the term at position in the accumulator accum at position 'number+1'. if times > 0 the coefficient of this term is multiplied by times/divby.

Parameters

<i>number</i>	The number of term fragments in accum that should be skipped
<i>accum</i>	The accumulator of term fragments
<i>position</i>	A position in (typically) a compiler buffer from where a (piece of a) term comes.
<i>times</i>	Multiply the result by this
<i>divby</i>	Divide the result by this.

This routine is typically used when we have to replace a (sub)expression pointer by a power of a (sub)expression. This uses mostly a binomial expansion and the new term is the old term multiplied one by one by terms of the new expression. The factors times and divby keep track of the binomial coefficient. Once this is complete, the routine FiniTerm will make the contents of the accumulator into a proper term that still needs to be normalized.

Definition at line [3003](#) of file [proces.c](#).

Referenced by [Generator\(\)](#).

4.19.4.8 StrCopy()

```
UBYTE * StrCopy (
    UBYTE * from,
    UBYTE * to ) [extern]
```

Definition at line [67](#) of file [sch.c](#).

4.19.4.9 WrtPower()

```
UBYTE * WrtPower (
    UBYTE * Out,
    WORD Power ) [extern]
```

Definition at line [738](#) of file [sch.c](#).

4.19.4.10 AccumGCD()

```
int AccumGCD (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb ) [extern]
```

Definition at line [648](#) of file [reken.c](#).

4.19.4.11 AddArgs()

```
void AddArgs (
    PHEAD WORD * s1,
    WORD * s2,
    WORD * m ) [extern]
```

Adds the arguments of two occurrences of the PolyFun.

Parameters

<i>s1</i>	Pointer to the first occurrence.
<i>s2</i>	Pointer to the second occurrence.
<i>m</i>	Pointer to where the answer should be.

Definition at line [2347](#) of file [sort.c](#).

Referenced by [AddPoly\(\)](#), and [MergePatches\(\)](#).

4.19.4.12 AddCoef()

```
int AddCoef (
    PHEAD WORD ** ps1,
    WORD ** ps2 ) [extern]
```

Adds the coefficients of the terms *ps1 and *ps2. The problem comes when there is not enough space for a new longer coefficient. First a local solution is tried. If this is not successful we need to move terms around. The possibility of a garbage collection should not be ignored, as avoiding this costs very much extra space which is nearly wasted otherwise.

If the return value is zero the terms cancelled.


The resulting term is left in *ps1.

Definition at line 2046 of file [sort.c](#).

References [GarbHand\(\)](#), and [NormalModulus\(\)](#).

Referenced by [SplitMerge\(\)](#).

Here is the call graph for this function:

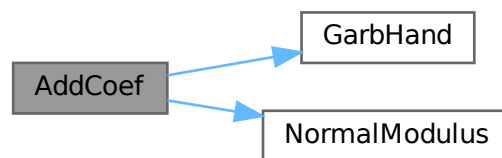

4.19.4.13 AddLong()

```
int AddLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line 706 of file [reken.c](#).

4.19.4.14 AddPLon()

```
int AddPLon (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line 751 of file [reken.c](#).

4.19.4.15 AddPoly()

```
int AddPoly (
    PHEAD WORD ** ps1,
    WORD ** ps2 ) [extern]
```

Routine should be called when $S \rightarrow \text{PolyWise} \neq 0$. It points then to the position of $AR.PolyFun$ in both terms.

We add the contents of the arguments of the two polynomials. Special attention has to be given to special arguments. We have to reserve a space equal to the size of one term + the size of the argument of the other. The addition has to be done in this routine because not all objects are reentrant.

Newer addition (12-nov-2007). The PolyFun can have two arguments. In that case $S \rightarrow \text{PolyFlag}$ is 2 and we have to call the routine for adding rational polynomials. We have to be rather careful what happens with: The location of the output The order of the terms in the arguments At first we allow only univariate polynomials in the PolyFun. This restriction will be lifted a.s.a.p.

Parameters

<i>ps1</i>	A pointer to the position of the first term
<i>ps2</i>	A pointer to the position of the second term

Returns


If zero the terms cancel. Otherwise the new term is in **ps1*.

Definition at line 2175 of file [sort.c](#).

References [AddArgs\(\)](#), [GarbHand\(\)](#), and [poly_ratfun_add\(\)](#).

Referenced by [SplitMerge\(\)](#).

Here is the call graph for this function:

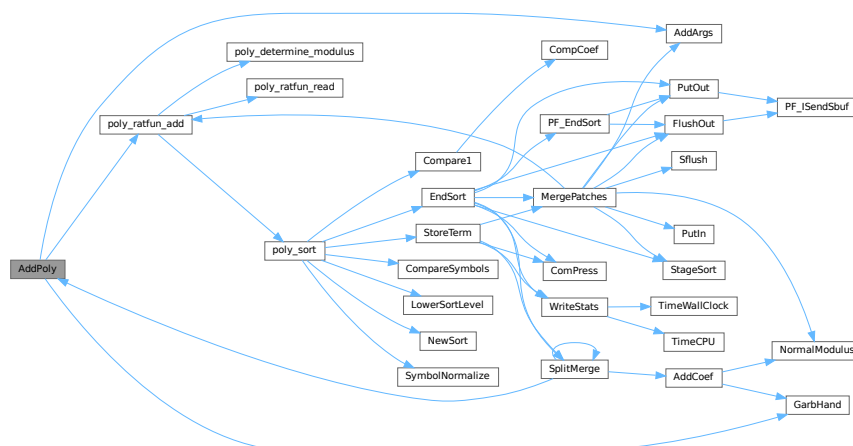

4.19.4.16 AddRat()

```
int AddRat (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line 210 of file [reken.c](#).

4.19.4.17 AddToLine()

```
void AddToLine (
    UBYTE * s ) [extern]
```

Definition at line 82 of file [sch.c](#).

4.19.4.18 AddWild()

```
int AddWild (
    PHEAD WORD,
    WORD type,
    WORD newnumber ) [extern]
```

Definition at line 1544 of file [wildcard.c](#).

4.19.4.19 BigLong()

```
int BigLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb ) [extern]
```

Definition at line 945 of file [reken.c](#).

4.19.4.20 BinomGen()

```
int BinomGen (
    PHEAD WORD * term,
    WORD level,
    WORD ** tstops,
    WORD x1,
    WORD x2,
    WORD pow1,
    WORD pow2,
    WORD sign,
    UWORD * coef,
    WORD ncoef ) [extern]
```

Definition at line 320 of file [ratio.c](#).

4.19.4.21 CheckWild()

```
int CheckWild (
    PHEAD WORD,
    WORD type,
    WORD newnumber,
    WORD * newval ) [extern]
```

Definition at line 1791 of file [wildcard.c](#).

4.19.4.22 Chisholm()

```
int Chisholm (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 1966 of file [opera.c](#).

4.19.4.23 CleanExpr()

```
int CleanExpr (
    WORD par ) [extern]
```

Definition at line 47 of file [execute.c](#).

4.19.4.24 CleanUp()

```
void CleanUp (
    WORD par ) [extern]
```

Definition at line 1780 of file [startup.c](#).

4.19.4.25 ClearWild()

```
void ClearWild (
    PHEAD0 ) [extern]
```

Definition at line 1518 of file [wildcard.c](#).

4.19.4.26 CompareFunctions()

```
int CompareFunctions (
    WORD * fleft,
    WORD * fright ) [extern]
```

Definition at line 54 of file [normal.c](#).

4.19.4.27 Commute()

```
int Commute (
    WORD * fleft,
    WORD * fright ) [extern]
```

Definition at line 118 of file [normal.c](#).

4.19.4.28 DetCommu()

```
WORD DetCommu (
    WORD * terms ) [extern]
```

Definition at line 4530 of file [normal.c](#).

4.19.4.29 DoesCommu()

```
WORD DoesCommu (
    WORD * term ) [extern]
```

Definition at line 4589 of file [normal.c](#).

4.19.4.30 CompArg()

```
int CompArg (
    WORD * s1,
    WORD * s2 ) [extern]
```

Definition at line 3224 of file [tools.c](#).

4.19.4.31 CompCoef()

```
WORD CompCoef (
    WORD * term1,
    WORD * term2 ) [extern]
```

Routine takes $a1 \bmod m1$ and $a2 \bmod m2$ and returns $a \bmod m1*m2$ with
 $a \bmod m1 = a1$ and $a \bmod m2 = a2$

Chinese remainder: $a \bmod (m1*m2) = q1*m1 + a1$ $a \bmod (m1*m2) = q2*m2 + a2$ Compute $n1$ such that $(n1*m1)m2$ is one
 Compute $n2$ such that $(n2*m2)m1$ is one Then $(a1*n2*m2 + a2*n1*m1) \bmod (m1*m2)$ is $a \bmod (m1*m2)$

Definition at line 3048 of file [reken.c](#).

Referenced by [Compare1\(\)](#).

4.19.4.32 CompGroup()

```
int CompGroup (
    PHEAD WORD,
    WORD ** args,
    WORD * a1,
    WORD * a2,
    WORD num ) [extern]
```

Definition at line 373 of file [function.c](#).

4.19.4.33 Compare1()

```
WORD Compare1 (
    PHEAD WORD * term1,
    WORD * term2,
    WORD level ) [extern]
```

Compares two terms. The answer is: 0 equal (with exception of the coefficient if level == 0.) >0 term1 comes first. <0 term2 comes first. Some special precautions may be needed to keep the CompCoef routine from generating overflows, although this is very unlikely in subterms. This routine should not return an error condition.

Originally this routine was called Compare. With the treatment of special polynomials with terms that contain only symbols and the need for extreme speed for the polynomial routines we made a special compare routine and now we store the address of the current compare routine in AR.CompareRoutine and have a macro Compare which makes all existing code work properly and we can just replace the routine on a thread by thread basis (each thread has its own AR struct).

Parameters

<i>term1</i>	First input term
<i>term2</i>	Second input term
<i>level</i>	The sorting level (may influence on the result)

Returns

0 equal (with exception of the coefficient if level == 0.) >0 term1 comes first. <0 term2 comes first.

When there are floating point numbers active (float_ = FLOATFUN) the presence of one or more float_ functions is returned in AT.SortFloatMode: 0: no float_ 1: float_ in term1 only 2: float_ in term2 only 3: float_ in both terms

Definition at line 2640 of file [sort.c](#).

References [CompCoef\(\)](#).

Referenced by [InFunction\(\)](#), [poly_sort\(\)](#), and [StartVariables\(\)](#).

Here is the call graph for this function:



4.19.4.34 CountDo()

```
WORD CountDo (
    WORD * term,
    WORD * instruct ) [extern]
```

Definition at line 552 of file [reshuf.c](#).

4.19.4.35 CountFun()

```
WORD CountFun (
    WORD * term,
    WORD * countfun ) [extern]
```

Definition at line 706 of file [reshuf.c](#).

4.19.4.36 DimensionSubterm()

```
WORD DimensionSubterm (
    WORD * subterm ) [extern]
```

Definition at line 867 of file [reshuf.c](#).

4.19.4.37 DimensionTerm()

```
WORD DimensionTerm (
    WORD * term ) [extern]
```

Definition at line 968 of file [reshuf.c](#).

4.19.4.38 DimensionExpression()

```
WORD DimensionExpression (
    PHEAD WORD * expr ) [extern]
```

Definition at line 1000 of file [reshuf.c](#).

4.19.4.39 Deferred()

```
int Deferred (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Picks up the deferred brackets. These are the bracket contents of which we postpone the reading when we use the 'Keep Brackets' statement. These contents are multiplying the terms just before they are sent to the sorting system. Special attention goes to having it thread-safe We have to lock positioning the file and reading it in a thread specific buffer.

4.19.4.42 DetVars()

```
void DetVars (
    WORD * term,
    WORD par ) [extern]
```

Definition at line 1829 of file [store.c](#).

4.19.4.43 Distribute()

```
int Distribute (
    DISTRIBUTE * d,
    WORD first ) [extern]
```

Definition at line 510 of file [symmetr.c](#).

4.19.4.44 DivLong()

```
int DivLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc,
    UWORD * d,
    WORD * nd ) [extern]
```

Definition at line 973 of file [reken.c](#).

4.19.4.45 DivRat()

```
int DivRat (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line 500 of file [reken.c](#).

4.19.4.46 Divvy()

```
int Divvy (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb ) [extern]
```

Definition at line 172 of file [reken.c](#).

4.19.4.47 DoDelta()

```
int DoDelta (
    WORD * t ) [extern]
```

Definition at line [4375](#) of file [normal.c](#).

4.19.4.48 DoDelta3()

```
int DoDelta3 (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line [1405](#) of file [reshuf.c](#).

4.19.4.49 TestPartitions()

```
int TestPartitions (
    WORD * tfun,
    PARTI * parti ) [extern]
```

Definition at line [1607](#) of file [reshuf.c](#).

4.19.4.50 DoPartitions()

```
int DoPartitions (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line [1722](#) of file [reshuf.c](#).

4.19.4.51 CoCanonicalize()

```
int CoCanonicalize (
    UBYTE * s ) [extern]
```

Definition at line [64](#) of file [diagrams.c](#).

4.19.4.52 DoCanonicalize()

```
int DoCanonicalize (
    PHEAD WORD * term,
    WORD * params ) [extern]
```

Definition at line [185](#) of file [diagrams.c](#).

4.19.4.53 GenTopologies()

```
int GenTopologies (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 1013 of file [diawrap.cc](#).

4.19.4.54 GenDiagrams()

```
int GenDiagrams (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 788 of file [diawrap.cc](#).

4.19.4.55 DoTopologyCanonicalize()

```
int DoTopologyCanonicalize (
    PHEAD WORD * term,
    WORD vert,
    WORD edge,
    WORD * args ) [extern]
```

Definition at line 417 of file [diagrams.c](#).

4.19.4.56 DoShattering()

```
int DoShattering (
    PHEAD WORD * connect,
    WORD * environ,
    WORD * partitions,
    WORD nvert ) [extern]
```

Definition at line 626 of file [diagrams.c](#).

4.19.4.57 GenerateTopologies()

```
int GenerateTopologies (
    PHEAD WORD,
    WORD nlegs,
    WORD setvert,
    WORD setmax ) [extern]
```

Definition at line 123 of file [topowrap.cc](#).

4.19.4.58 DoTableExpansion()

```
int DoTableExpansion (
    WORD * term,
    WORD level ) [extern]
```

Definition at line [334](#) of file [tables.c](#).

4.19.4.59 DoDistrib()

```
int DoDistrib (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line [1119](#) of file [reshuf.c](#).

4.19.4.60 DoShuffle()

```
int DoShuffle (
    WORD * term,
    WORD level,
    WORD fun,
    WORD option ) [extern]
```

Definition at line [2095](#) of file [reshuf.c](#).

4.19.4.61 DoPermutations()

```
int DoPermutations (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line [2007](#) of file [reshuf.c](#).

4.19.4.62 Shuffle()

```
int Shuffle (
    WORD * from1,
    WORD * from2,
    WORD * to ) [extern]
```

Definition at line [2229](#) of file [reshuf.c](#).

4.19.4.63 FinishShuffle()

```
int FinishShuffle (
    WORD * fini ) [extern]
```

Definition at line [2421](#) of file [reshuf.c](#).

4.19.4.64 DoStuffle()

```
int DoStuffle (  
    WORD * term,  
    WORD level,  
    WORD fun,  
    WORD option ) [extern]
```

Definition at line [2487](#) of file [reshuf.c](#).

4.19.4.65 Stuffle()

```
int Stuffle (  
    WORD * from1,  
    WORD * from2,  
    WORD * to ) [extern]
```

Definition at line [2702](#) of file [reshuf.c](#).

4.19.4.66 FinishStuffle()

```
int FinishStuffle (  
    WORD * fini ) [extern]
```

Definition at line [2829](#) of file [reshuf.c](#).

4.19.4.67 StuffRootAdd()

```
WORD * StuffRootAdd (  
    WORD * t1,  
    WORD * t2,  
    WORD * to ) [extern]
```

Definition at line [2876](#) of file [reshuf.c](#).

4.19.4.68 TestUse()

```
int TestUse (  
    WORD * term,  
    WORD level ) [extern]
```

Definition at line [1414](#) of file [tables.c](#).

4.19.4.69 FindTB()

```
DBASE * FindTB (  
    UBYTE * name ) [extern]
```

Definition at line [734](#) of file [tables.c](#).

4.19.4.70 CheckTableDeclarations()

```
int CheckTableDeclarations (
    DBASE * d ) [extern]
```

Definition at line 1178 of file [tables.c](#).

4.19.4.71 Apply()

```
void Apply (
    WORD * term,
    WORD level ) [extern]
```

Definition at line 1981 of file [tables.c](#).

4.19.4.72 ApplyExec()

```
int ApplyExec (
    WORD * term,
    int maxtogo,
    WORD level ) [extern]
```

Definition at line 2039 of file [tables.c](#).

4.19.4.73 ApplyReset()

```
void ApplyReset (
    WORD level ) [extern]
```

Definition at line 2256 of file [tables.c](#).

4.19.4.74 TableReset()

```
void TableReset (
    void ) [extern]
```

Definition at line 2291 of file [tables.c](#).

4.19.4.75 ReWorkT()

```
void ReWorkT (
    WORD * term,
    WORD * funs,
    WORD numfuns ) [extern]
```

Definition at line 1900 of file [tables.c](#).

4.19.4.76 GetIfDollarNum()

```
WORD GetIfDollarNum (
    WORD * ifp,
    WORD * ifstop ) [extern]
```

Definition at line 106 of file [if.c](#).

4.19.4.77 FindVar()

```
int FindVar (
    WORD * v,
    WORD * term ) [extern]
```

Definition at line 173 of file [if.c](#).

4.19.4.78 DoIfStatement()

```
int DoIfStatement (
    PHEAD WORD * ifcode,
    WORD * term ) [extern]
```

Definition at line 280 of file [if.c](#).

4.19.4.79 DoOnePow()

```
int DoOnePow (
    PHEAD WORD * term,
    WORD power,
    WORD nexp,
    WORD * accum,
    WORD * aa,
    WORD level,
    WORD * freeze ) [extern]
```

Routine gets one power of an expression in the scratch system. If there are more powers needed there will be a recursion.

No attempt is made to use binomials because we have no information about commuting properties.

There is a searching for the contents of brackets if needed. This searching may be rather slow because of the single links.

Parameters

<i>term</i>	is the term we are adding to.
<i>power</i>	is the power of the expression that we need.
<i>nexp</i>	is the number of the expression.
<i>accum</i>	is the accumulator of terms. It accepts the termfragments that are made into a proper term in FiniTerm
<i>aa</i>	points to the start of the entire accumulator. In *aa we store the number of term fragments that are in the accumulator.
<i>level</i>	is the current depth in the tree of statements. It is needed to continue to the next operation/substitution with each generated term
<i>freeze</i>	is the pointer to the bracket information that should be matched.

4.19.4.82 DoSumF2()

```
int DoSumF2 (
    PHEAD WORD * term,
    WORD * params,
    WORD replac,
    WORD level ) [extern]
```

Definition at line 520 of file [ratio.c](#).

4.19.4.83 DoTheta()

```
int DoTheta (
    PHEAD WORD * t ) [extern]
```

Definition at line 4278 of file [normal.c](#).

4.19.4.84 EndSort()

```
LONG EndSort (
    PHEAD WORD * buffer,
    int par ) [extern]
```

Finishes a sort. At AR.sLevel == 0 the output is to the regular output stream. When AR.sLevel > 0, the parameter par determines the actual output. The AR.sLevel will be popped. All ongoing stages are finished and if the sortfile is open it is closed. The statistics are printed when AR.sLevel == 0 par == 0 [Output](#) to the buffer. par == 1 Sort for function arguments. The output will be copied into the buffer. It is assumed that this is in the WorkSpace. par == 2 Sort for \$-variable. We return the address of the buffer that contains the output in buffer (treated like WORD **). We first catch the output in a file (unless we can intercept things after the small buffer has been sorted) Then we read from the file into a buffer. Only when par == 0 data compression can be attempted at AT.SS==AT.S0.

Parameters

<i>buffer</i>	buffer for output when needed
<i>par</i>	See above

Returns

If negative: error. If positive: number of words in output.

Definition at line 745 of file [sort.c](#).

References [ComPress\(\)](#), [FlushOut\(\)](#), [MergePatches\(\)](#), [PF_EndSort\(\)](#), [PutOut\(\)](#), [SplitMerge\(\)](#), [StageSort\(\)](#), and [WriteStats\(\)](#).

Referenced by [generate_expression\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [MakeDollarInteger\(\)](#), [MakeDollarMod\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_sort\(\)](#), [poly_unfactorize_expression\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), [TakeArgContent\(\)](#), and [TestMatch\(\)](#).

4.19.4.88 EpfGen()

```
WORD EpfGen (
    WORD number,
    WORD * inlist,
    WORD * kron,
    WORD * perm,
    WORD sgn ) [extern]
```

Definition at line 282 of file [opera.c](#).

4.19.4.89 EqualArg()

```
int EqualArg (
    WORD * parms,
    WORD num1,
    WORD num2 ) [extern]
```

Definition at line 1379 of file [reshuf.c](#).

4.19.4.90 Factorial()

```
int Factorial (
    PHEAD WORD,
    UWORD * a,
    WORD * na ) [extern]
```

Definition at line 3450 of file [reken.c](#).

4.19.4.91 Bernoulli()

```
int Bernoulli (
    WORD n,
    UWORD * a,
    WORD * na ) [extern]
```

Definition at line 3530 of file [reken.c](#).

4.19.4.92 FactorIn()

```
int FactorIn (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 46 of file [factor.c](#).

4.19.4.93 FactorInExpr()

```
int FactorInExpr (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line [421](#) of file [factor.c](#).

4.19.4.94 FindAll()

```
int FindAll (
    PHEAD WORD * term,
    WORD * pattern,
    WORD level,
    WORD * par ) [extern]
```

Definition at line [1197](#) of file [pattern.c](#).

4.19.4.95 FindMulti()

```
WORD FindMulti (
    PHEAD WORD * term,
    WORD * pattern ) [extern]
```

Definition at line [954](#) of file [findpat.c](#).

4.19.4.96 FindOnce()

```
int FindOnce (
    PHEAD WORD * term,
    WORD * pattern ) [extern]
```

Definition at line [419](#) of file [findpat.c](#).

4.19.4.97 FindOnly()

```
int FindOnly (
    PHEAD WORD * term,
    WORD * pattern ) [extern]
```

Definition at line [61](#) of file [findpat.c](#).

4.19.4.98 FindRest()

```
int FindRest (
    PHEAD WORD * term,
    WORD * pattern ) [extern]
```

Definition at line [1070](#) of file [findpat.c](#).

4.19.4.99 FindrNumber()

```
WORD FindrNumber (
    WORD n,
    VARRENUM * v ) [extern]
```

Definition at line [2587](#) of file [store.c](#).

4.19.4.100 FiniLine()

```
void FiniLine (
    void ) [extern]
```

Definition at line [182](#) of file [sch.c](#).

4.19.4.101 FiniTerm()

```
int FiniTerm (
    PHEAD WORD * term,
    WORD * accum,
    WORD * termout,
    WORD number,
    WORD tepos ) [extern]
```

Concatenates the contents of the accumulator into a single legal term, which replaces the subexpression pointer

Parameters

<i>term</i>	the input term with the (sub)expression subterm
<i>accum</i>	the accumulator with the term fragments
<i>termout</i>	the location where the output should be written
<i>number</i>	the number of term fragments in the accumulator
<i>tepos</i>	the position of the subterm in term to be replaced

Definition at line [3068](#) of file [proces.c](#).

Referenced by [DoOnePow\(\)](#), and [Generator\(\)](#).

4.19.4.102 FlushOut()

```
int FlushOut (
    POSITION * position,
    FILEHANDLE * fi,
    int compr ) [extern]
```

Completes output to an output file and writes the trailing zero.

Parameters

<i>position</i>	The position in the file after writing
<i>fi</i>	The file (or its cache)
<i>compr</i>	Indicates whether there should be compression with gzip.

Returns

Regular conventions (OK -> 0).

Definition at line 1832 of file [sort.c](#).

References [FiLe::handle](#), [BrAcKeTiNfO::indexbuffer](#), and [PF_ISendSbuf\(\)](#).

Referenced by [EndSort\(\)](#), [MergePatches\(\)](#), [PF_EndSort\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:

**4.19.4.103 FunLevel()**

```
void FunLevel (
    PHEAD WORD * term ) [extern]
```

Definition at line 130 of file [reshuf.c](#).

4.19.4.104 AdjustRenumScratch()

```
void AdjustRenumScratch (
    PHEAD0 ) [extern]
```

Definition at line 506 of file [reshuf.c](#).

4.19.4.105 GarbHand()

```
void GarbHand (
    void ) [extern]
```

Garbage collection that takes place when the small extension is full and we need to place more terms there. When this is the case there are many holes in the small buffer and the whole can be compactified. The major complication is the buffer for SplitMerge. There are two options for temporary memory: 1: find some buffer that has enough space (maybe in the large buffer). 2: allocate a buffer. Give it back afterwards of course. If the small extension is properly dimensioned this routine should be called very rarely. Most of the time it will be called when the polyfun or polyratfun is active.

Definition at line 3652 of file [sort.c](#).

Referenced by [AddCoef\(\)](#), and [AddPoly\(\)](#).

4.19.4.106 GcdLong()

```
int GcdLong (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line [2277](#) of file [reken.c](#).

4.19.4.107 LcmLong()

```
int LcmLong (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line [2702](#) of file [reken.c](#).

4.19.4.108 Generator()

```
int Generator (
    PHEAD WORD * term,
    WORD level ) [extern]
```

The heart of the program. Here the expansion tree is set up in one giant recursion

Parameters

<i>term</i>	the input term. may be overwritten
<i>level</i>	the level in the compiler buffer (number of statement)

Returns

Normal conventions (OK = 0).


The routine looks first whether there are unsubstituted (sub)expressions. If so, one of them gets inserted term by term and the new term is used in a renewed call to Generator. If there are no (sub)expressions, the term is normalized, the compiler level is raised (next statement) and the program looks what type of statement this is. If this is a special statement it is either treated on the spot or the appropriate routine is called. If it is a substitution, the pattern matcher is called (TestMatch) which tells whether there was a match. If so we need to call TestSub again to test for (sub)expressions. If we run out of levels, the term receives a final treatment for modulus calculus and/or brackets and is then sent off to the sorting routines.

Definition at line [3267](#) of file [proces.c](#).

References [Deferred\(\)](#), [DoOnePow\(\)](#), [FiniTerm\(\)](#), [Generator\(\)](#), [InFunction\(\)](#), [InsertTerm\(\)](#), [CbUf::lhs](#), [VaRrEnUm::lo](#), [PasteFile\(\)](#), [PasteTerm\(\)](#), [PF_Deferred\(\)](#), [CbUf::Pointer](#), [PolyFunMul\(\)](#), [PrepPoly\(\)](#), [PutPreVar\(\)](#), [CbUf::rhs](#), [StoreTerm\(\)](#), [ReNuMbEr::symb](#), and [TestMatch\(\)](#).

Referenced by [Deferred\(\)](#), [DoOnePow\(\)](#), [generate_expression\(\)](#), [Generator\(\)](#), [InFunction\(\)](#), [MakeDollarInteger\(\)](#), [MakeDollarMod\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Deferred\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [Processor\(\)](#), and [TestMatch\(\)](#).

Here is the call graph for this function:

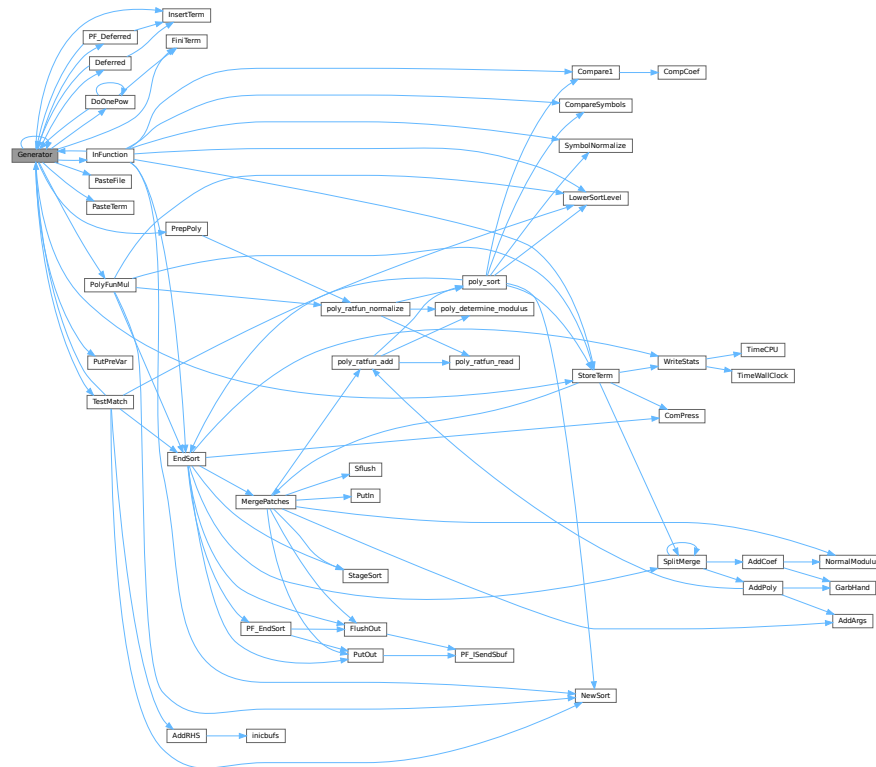

4.19.4.109 GetBinom()

```
int GetBinom (
    UWORD * a,
    WORD * na,
    WORD i1,
    WORD i2 ) [extern]
```

Definition at line 2668 of file [reken.c](#).

4.19.4.110 GetFromStore()

```
WORD GetFromStore (
    WORD * to,
    POSITION * position,
    RENUMBER renumber,
    WORD * InCompState,
    WORD nexpr ) [extern]
```

Definition at line 1628 of file [store.c](#).

4.19.4.111 GetLong()

```
int GetLong (
    UBYTE * s,
    UWORD * a,
    WORD * na ) [extern]
```

Definition at line 1775 of file [reken.c](#).

4.19.4.112 GetMoreTerms()

```
WORD GetMoreTerms (
    WORD * term ) [extern]
```

Definition at line 1425 of file [store.c](#).

4.19.4.113 GetMoreFromMem()

```
int GetMoreFromMem (
    WORD * term,
    WORD ** tpoim ) [extern]
```

Definition at line 1521 of file [store.c](#).

4.19.4.114 GetOneTerm()

```
WORD GetOneTerm (
    PHEAD WORD * term,
    FILEHANDLE * fi,
    POSITION * pos,
    int par ) [extern]
```

Definition at line 1267 of file [store.c](#).

4.19.4.115 GetTable()

```
RENUMBER GetTable (
    WORD expr,
    POSITION * position,
    WORD mode ) [extern]
```

Definition at line 2825 of file [store.c](#).

4.19.4.116 GetTerm()

```
WORD GetTerm (
    PHEAD WORD * term ) [extern]
```

Definition at line 992 of file [store.c](#).

4.19.4.117 **Glue()**

```
int Glue (
    PHEAD WORD * term1,
    WORD * term2,
    WORD * sub,
    WORD insert ) [extern]
```

Definition at line [461](#) of file [ratio.c](#).

4.19.4.118 **InFunction()**

```
int InFunction (
    PHEAD WORD * term,
    WORD * termout ) [extern]
```

Makes the replacement of the subexpression with the number 'replac' in a function argument. Additional information is passed in some of the AR, AN, AT variables.

Parameters

<i>term</i>	The input term
<i>termout</i>	The output term

Returns

0: everything is fine, Negative: fatal, Positive: error.


Special attention should be given to nested functions!

Definition at line [2175](#) of file [proces.c](#).

References [Compare1\(\)](#), [CompareSymbols\(\)](#), [EndSort\(\)](#), [Generator\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [StoreTerm\(\)](#), and [SymbolNormalize\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

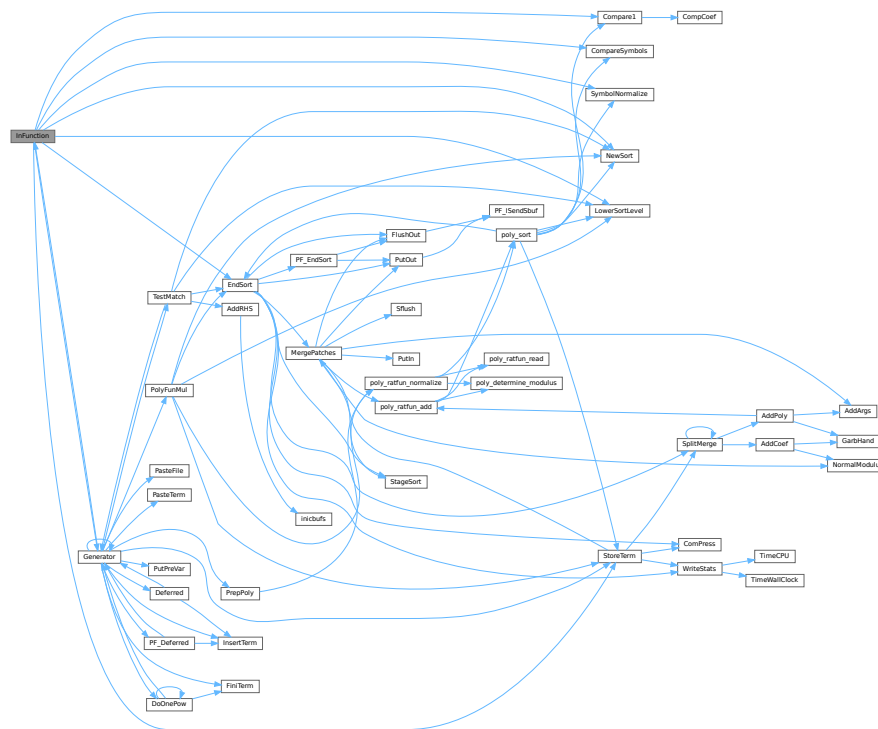

4.19.4.119 IniLine()

```
void IniLine (
    WORD extrablank ) [extern]
```

Definition at line 267 of file [sch.c](#).

4.19.4.120 IniVars()

```
void IniVars (
    void ) [extern]
```

Definition at line 1371 of file [startup.c](#).

4.19.4.121 InsertTerm()

```
int InsertTerm (
    PHEAD WORD * term,
    WORD replac,
    WORD extractbuff,
    WORD * position,
    WORD * termout,
    WORD tepos ) [extern]
```

Puts the terms 'term' and 'position' together into a single legal term in termout. replac is the number of the subexpression that should be replaced. It must be a positive term. When action is needed in the argument of a function all terms in that argument are dealt with recursively. The subexpression is sorted. Only one subexpression is done at a time this way.

Parameters

<i>term</i>	the input term
<i>replac</i>	number of the subexpression pointer to replace
<i>extractbuff</i>	number of the compiler buffer replac refers to
<i>position</i>	position from where to take the term in the compiler buffer
<i>termout</i>	the output term
<i>tepos</i>	offset in term where the subexpression is.

Returns

Normal conventions (OK = 0).

Definition at line [2745](#) of file [proces.c](#).

Referenced by [Deferred\(\)](#), [Generator\(\)](#), and [PF_Deferred\(\)](#).

4.19.4.122 LongToLine()

```
void LongToLine (
    UWORD * a,
    WORD na ) [extern]
```

Definition at line [303](#) of file [sch.c](#).

4.19.4.123 MakeDirty()

```
int MakeDirty (
    WORD * term,
    WORD * x,
    WORD par ) [extern]
```

Definition at line [51](#) of file [function.c](#).

4.19.4.124 MarkDirty()

```
void MarkDirty (
    WORD * term,
    WORD flags ) [extern]
```

Definition at line [97](#) of file [function.c](#).

4.19.4.125 PolyFunDirty()

```
void PolyFunDirty (
    PHEAD WORD * term ) [extern]
```

Definition at line [139](#) of file [function.c](#).

4.19.4.126 PolyFunClean()

```
void PolyFunClean (
    PHEAD WORD * term ) [extern]
```

Definition at line 174 of file [function.c](#).

4.19.4.127 MakeModTable()

```
int MakeModTable (
    void ) [extern]
```

Definition at line 3364 of file [reken.c](#).

4.19.4.128 MatchE()

```
int MatchE (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par ) [extern]
```

Definition at line 56 of file [symmetr.c](#).

4.19.4.129 MatchCy()

```
int MatchCy (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par ) [extern]
```

Definition at line 571 of file [symmetr.c](#).

4.19.4.130 FunMatchCy()

```
int FunMatchCy (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par ) [extern]
```

Definition at line 1067 of file [symmetr.c](#).

4.19.4.131 FunMatchSy()

```
int FunMatchSy (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par ) [extern]
```

Definition at line 1525 of file [symmetr.c](#).

4.19.4.132 MatchArgument()

```
int MatchArgument (
    PHEAD WORD * arg,
    WORD * pat ) [extern]
```

Definition at line [2052](#) of file [symmetr.c](#).

4.19.4.133 MatchFunction()

```
int MatchFunction (
    PHEAD WORD * pattern,
    WORD * interm,
    WORD * wilds ) [extern]
```

Definition at line [826](#) of file [function.c](#).

4.19.4.134 MergePatches()

```
int MergePatches (
    WORD par ) [extern]
```

The general merge routine. Can be used for the large buffer and the file merging. The array *S->Patches* tells where the patches start *S->pStop* tells where they end (has to be computed first). The end of a 'line to be merged' is indicated by a zero. If the end is reached without running into a zero or a term runs over the boundary of a patch it is a file merging operation and a new piece from the file is read in.

Parameters


<i>par</i>	If <i>par</i> == 0 the sort is for file -> outputfile. If <i>par</i> == 1 the sort is for large buffer -> sortfile. If <i>par</i> == 2 the sort is for large buffer -> outputfile.
------------	--

Definition at line [3767](#) of file [sort.c](#).

References [AddArgs\(\)](#), [FlushOut\(\)](#), [FiLe::handle](#), [NormalModulus\(\)](#), [poly_ratfun_add\(\)](#), [PutIn\(\)](#), [PutOut\(\)](#), [Sflush\(\)](#), and [StageSort\(\)](#).

Referenced by [EndSort\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

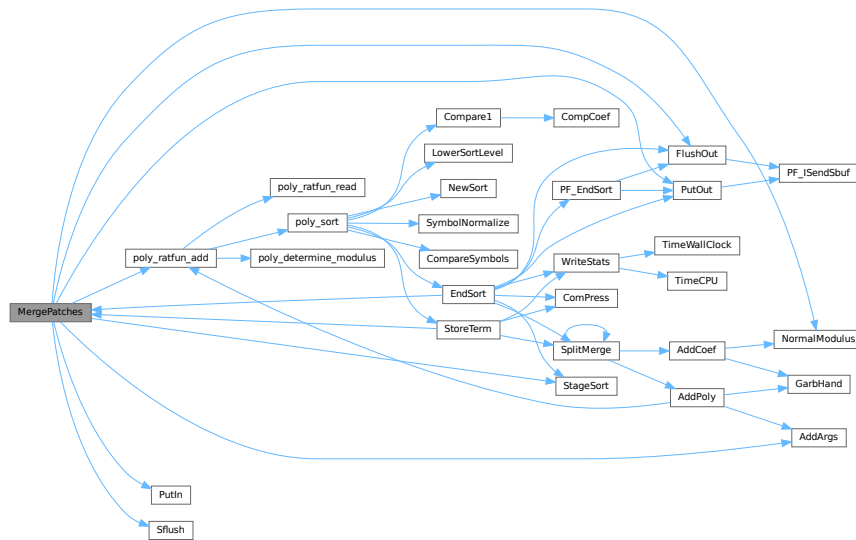

4.19.4.135 MesCerr()

```
int MesCerr (
    char * s,
    UBYTE * t ) [extern]
```

Definition at line 824 of file [message.c](#).

4.19.4.136 MesComp()

```
int MesComp (
    char * s,
    UBYTE * p,
    UBYTE * q ) [extern]
```

Definition at line 843 of file [message.c](#).

4.19.4.137 Modulus()

```
int Modulus (
    WORD * term ) [extern]
```

Definition at line 3103 of file [reken.c](#).

4.19.4.138 MoveDummies()

```
void MoveDummies (
    PHEAD WORD * term,
    WORD shift ) [extern]
```

Definition at line 436 of file [reshuf.c](#).

4.19.4.139 MulLong()

```
int MulLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line 842 of file [reken.c](#).

4.19.4.140 MulRat()

```
int MulRat (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
```

Definition at line 378 of file [reken.c](#).

4.19.4.141 Mully()

```
int Mully (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb ) [extern]
```

Definition at line 126 of file [reken.c](#).

4.19.4.142 MultDo()

```
int MultDo (
    PHEAD WORD * term,
    WORD * pattern ) [extern]
```

Definition at line 1044 of file [reshuf.c](#).

4.19.4.143 NewSort()

```
int NewSort (
    PHEAD0 ) [extern]
```

Starts a new sort. At the lowest level this is a 'main sort' with the struct according to the parameters in S0. At higher levels this is a sort for functions, subroutines or dollars. We prepare the arrays and structs.

Returns

Regular convention (OK -> 0)

Definition at line 649 of file [sort.c](#).

Referenced by [generate_expression\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [MakeDollarInteger\(\)](#), [MakeDollarMod\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_sort\(\)](#), [poly_unfactorize_expression\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), [TakeArgContent\(\)](#), and [TestMatch\(\)](#).

4.19.4.144 ExtraSymbol()

```
int ExtraSymbol (
    WORD sym,
    WORD pow,
    WORD nsym,
    WORD * ppsym,
    WORD * ncoef ) [extern]
```

Definition at line [4216](#) of file [normal.c](#).

4.19.4.145 Normalize()

```
int Normalize (
    PHEAD WORD * term ) [extern]
```

Definition at line [193](#) of file [normal.c](#).

4.19.4.146 BracketNormalize()

```
int BracketNormalize (
    PHEAD WORD * term ) [extern]
```

Definition at line [5291](#) of file [normal.c](#).

4.19.4.147 DropCoefficient()

```
void DropCoefficient (
    PHEAD WORD * term ) [extern]
```

Definition at line [5116](#) of file [normal.c](#).

4.19.4.148 DropSymbols()

```
void DropSymbols (
    PHEAD WORD * term ) [extern]
```

Definition at line [5134](#) of file [normal.c](#).

4.19.4.149 PutInside()

```
int PutInside (
    PHEAD WORD * term,
    WORD * code ) [extern]
```

Definition at line [609](#) of file [index.c](#).

4.19.4.150 OpenTemp()

```
void OpenTemp (
    void ) [extern]
```

Definition at line 48 of file [store.c](#).

4.19.4.151 Pack()

```
void Pack (
    UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb ) [extern]
```

Definition at line 62 of file [reken.c](#).

4.19.4.152 PasteFile()

```
LONG PasteFile (
    PHEAD WORD number,
    WORD * accum,
    POSITION * position,
    WORD ** accfill,
    RENUMBER renumber,
    WORD * freeze,
    WORD nexpr ) [extern]
```

Gets a term from stored expression *expr* and puts it in the accumulator at position number. It returns the length of the term that came from file.

Parameters

<i>number</i>	number of partial terms to skip in accum
<i>accum</i>	the accumulator
<i>position</i>	file position from where to get the stored term
<i>accfill</i>	returns tail position in accum
<i>renumber</i>	the renumber struct for the variables in the stored expression
<i>freeze</i>	information about if we need only the contents of a bracket
<i>nexpr</i>	the number of the stored expression

Returns

Normal conventions (OK = 0).

Definition at line 2881 of file [proces.c](#).

Referenced by [Generator\(\)](#).

4.19.4.153 Permute()

```
int Permute (
    PERM * perm,
    WORD first ) [extern]
```

Definition at line 444 of file [symmetr.c](#).

4.19.4.154 PermuteP()

```
int PermuteP (
    PERMP * perm,
    WORD first ) [extern]
```

Definition at line 478 of file [symmetr.c](#).

4.19.4.155 PolyFunMul()

```
int PolyFunMul (
    PHEAD WORD * term ) [extern]
```

Multiplies the arguments of multiple occurrences of the polyfun. In this routine we do the original PolyFun with one argument only. The PolyRatFun (PolyFunType = 2) is done in a dedicated routine in the file [polywrap.cc](#) The new result is written over the old result.

Parameters

<i>term</i>	It contains the input term and later the output.
-------------	--

Returns


Normal conventions (OK = 0).

Definition at line 5374 of file [proces.c](#).

References [EndSort\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [poly_ratfun_normalize\(\)](#), and [StoreTerm\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

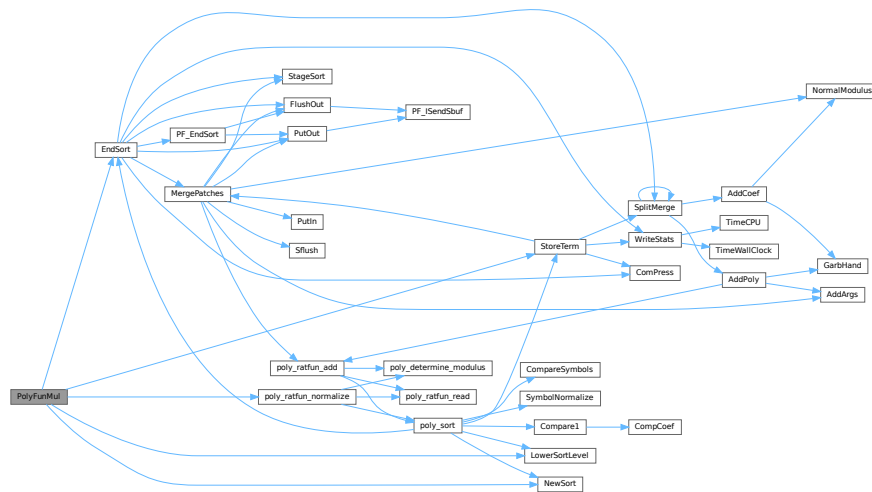

4.19.4.156 PopVariables()

```
int PopVariables (
    void ) [extern]
```

Definition at line 211 of file [execute.c](#).

4.19.4.157 PrepPoly()

```
int PrepPoly (
    PHEAD WORD * term,
    WORD par ) [extern]
```

Routine checks whether the count of function AR.PolyFun is zero or one. If it is one and it has one scalarlike argument the coefficient of the term is pulled inside the argument. If the count is zero a new function is made with the coefficient as its only argument. The function should be placed at its proper position.

When this function is active it places the PolyFun as last object before the coefficient. This is needed because otherwise the compress algorithm has problems in MergePatches.

The bracket routine should also place the PolyFun at a comparable spot. The compression should then stop at the PolyFun. It doesn't really have to stop when writing the final result but this may be too complicated.


The parameter par tells whether we are at groundlevel or inside a function or dollar variable.

Definition at line 4986 of file [proces.c](#).

References [poly_ratfun_normalize\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

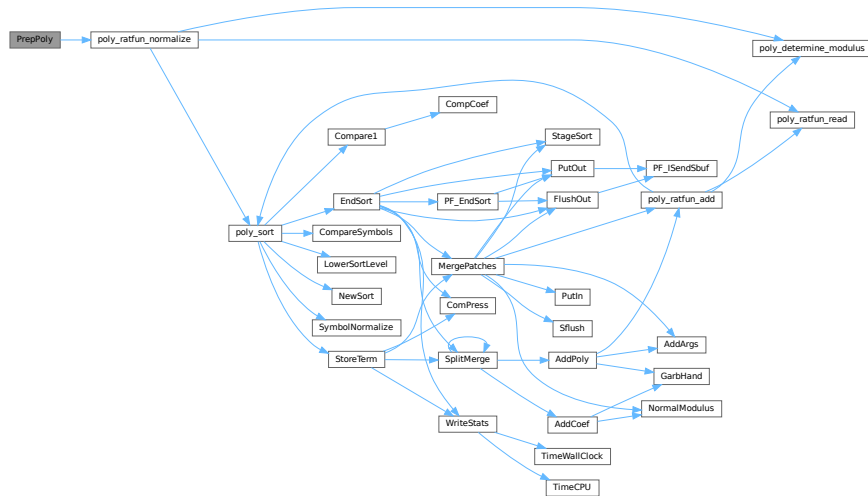

4.19.4.158 Processor()

```
int Processor (
    void ) [extern]
```

This is the central processor. It accepts a stream of Expressions which is accessed by calls to GetTerm. The expressions reside either in AR.infile or AR.hidefile. The definitions of an expression are seen as an id-statement, so the primary Expressions should be written to the system of scratch files as single terms with an expression pointer. Each expression is terminated with a zero and the whole is terminated by two zeroes.

The routine DoExecute should determine whether results are to be printed, should revert the scratch I/O directions etc. In principle it is DoExecute that calls Processor.

Returns

if everything OK: 0. Otherwise error. The preprocessor may continue with compilation though. Really fatal errors should return on the spot by calling Terminate.

Definition at line 64 of file [proces.c](#).

References [CbUf::Buffer](#), [EndSort\(\)](#), [FlushOut\(\)](#), [Generator\(\)](#), [CbUf::lhs](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [PF_BroadcastRHS\(\)](#), [PF_InParallelProcessor\(\)](#), [PF_Processor\(\)](#), [CbUf::Pointer](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [PutOut\(\)](#), [CbUf::rhs](#), and [StoreTerm\(\)](#).

[illegible]

```
int Product (
    UWORD * a,
    WORD * na,
    WORD b ) [extern]
```

4.19.4.160 PrtLong()

Definition at line 1713 of file reken.c.

4.19.4.161 PrtTerms()

```
void PrtTerms (
    void ) [extern]
```

Definition at line 716 of file [sch.c](#).

4.19.4.162 PrintDeprecation()

```
void PrintDeprecation (
    const char * feature,
    const char * issue ) [extern]
```

Prints a deprecation warning for a given feature.

Parameters

<i>feature</i>	The name of the deprecated feature.
<i>issue</i>	The associated issue, e.g., "issues/700".

Definition at line 2082 of file [startup.c](#).

4.19.4.163 PrintRunningTime()

```
void PrintRunningTime (
    void ) [extern]
```

Definition at line 2106 of file [startup.c](#).

4.19.4.164 GetRunningTime()

```
LONG GetRunningTime (
    void ) [extern]
```

Definition at line 2147 of file [startup.c](#).

4.19.4.165 PutBracket()

```
int PutBracket (
    PHEAD WORD * termin ) [extern]
```

Definition at line 1112 of file [execute.c](#).

4.19.4.166 PutIn()

```
LONG PutIn (
    FILEHANDLE * file,
    POSITION * position,
    WORD * buffer,
    WORD ** take,
    int npat ) [extern]
```

Reads a new patch from position in file handle. It is put at buffer, anything after take is moved forward. This would be part of a term that hasn't been used yet. Because of this there should be some space before the start of the buffer

Parameters

<i>file</i>	The file system from which to read
<i>position</i>	The position from which to read
<i>buffer</i>	The buffer into which to read
<i>take</i>	The unused tail should be moved before the buffer
<i>npat</i>	The number of the patch. Is needed if the information was compressed with gzip, because each patch has its own independent gzip encoding.

Definition at line 1324 of file [sort.c](#).

References [FiLe::handle](#).

Referenced by [MergePatches\(\)](#).

4.19.4.167 PutInStore()

```
int PutInStore (
    INDEXENTRY * ind,
    WORD num ) [extern]
```

Definition at line 873 of file [store.c](#).

4.19.4.168 PutOut()

```
WORD PutOut (
    PHEAD WORD * term,
    POSITION * position,
    FILEHANDLE * fi,
    WORD ncomp ) [extern]
```

Routine writes one term to file handle at position. It returns the new value of the position.

NOTE: For 'final output' we may have to index the brackets. See the struct BRACKETINDEX. We should maintain:
 1: a list with brackets array with the brackets
 2: a list of objects of type BRACKETINDEX. It contains array with either pointers or offsets to the list of brackets. starting positions in the file. The index may be tied to a maximum size. In that case we may have to prune the list occasionally.

Parameters


<i>term</i>	The term to be written
<i>position</i>	The position in the file. Afterwards it is updated
<i>fi</i>	The file (or its cache) to which should be written
<i>ncomp</i>	Information about what type of compression should be used

Definition at line 1470 of file [sort.c](#).

References [FiLe::handle](#), and [PF_IsSendSbuf\(\)](#).

Referenced by [EndSort\(\)](#), [generate_expression\(\)](#), [MergePatches\(\)](#), [PF_EndSort\(\)](#), [PF_Processor\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:



4.19.4.169 Quotient()

```
UWORD Quotient (  
    UWORD * a,  
    WORD * na,  
    WORD b ) [extern]
```

Definition at line 1621 of file [reken.c](#).

4.19.4.170 RaisPow()

```
int RaisPow (  
    PHEAD UWORD * a,  
    WORD * na,  
    UWORD b ) [extern]
```

Definition at line 1229 of file [reken.c](#).

4.19.4.171 RaisPowCached()

```
void RaisPowCached (  
    PHEAD WORD x,  
    WORD n,  
    UWORD ** c,  
    WORD * nc ) [extern]
```

Computes power x^n and caches the value

4.19.5 Description

Calculates the power x^n and stores the results for caching purposes. The pointer `c` (i.e., the pointer, and not what it points to) is overwritten. What it points to should not be overwritten in the calling function.

4.19.6 Notes

- Caching is done in `AT.small_power[]`. This array is extended if necessary.

Definition at line 1297 of file [reken.c](#).

Referenced by [poly::divmod_heap\(\)](#), [poly::divmod_univar\(\)](#), and [poly::mul_heap\(\)](#).

4.19.6.1 RaisPowMod()

```
WORD RaisPowMod (
    WORD x,
    WORD n,
    WORD m ) [extern]
```

Definition at line 1384 of file [reken.c](#).

4.19.6.2 NormalModulus()

```
int NormalModulus (
    UWORD * a,
    WORD * na ) [extern]
```

Brings a modular representation in the range $-p/2$ to $+p/2$ The return value tells whether anything was done. Routine made in the general modulus revamp of July 2008 (JV).

Definition at line 1404 of file [reken.c](#).

Referenced by [AddCoef\(\)](#), and [MergePatches\(\)](#).

4.19.6.3 MakeInverses()

```
int MakeInverses (
    void ) [extern]
```

Makes a table of inverses in modular calculus The modulus is in `AC.cmod` and `AC.ncmod` One should notice that the table of inverses can only be made if the modulus fits inside a single FORM word. Otherwise the table lookup becomes too difficult and the table too long.

Definition at line 1441 of file [reken.c](#).

References [GetModInverses\(\)](#).

Here is the call graph for this function:



4.19.6.4 GetModInverses()

```
int GetModInverses (
    WORD m1,
    WORD m2,
    WORD * im1,
    WORD * im2 ) [extern]
```

Input m1 and m2, which are relative prime. determines $a*m1+b*m2 = 1$ (and 1 is the gcd of m1 and m2) then $a*m1 = 1 \bmod m2$ and hence $im1 = a$. and $b*m2 = 1 \bmod m1$ and hence $im2 = b$. Set $m1 = 0*m1+1*m2 = a1*m1+b1*m2$ $m2 = 1*m1+0*m2 = a2*m1+b2*m2$ If everything is OK, the return value is zero

Definition at line 1477 of file [reken.c](#).

Referenced by [poly::divmod_heap\(\)](#), [poly::divmod_univar\(\)](#), [MakeDollarMod\(\)](#), [MakeInverses\(\)](#), [MakeMod\(\)](#), [TakeContent\(\)](#), and [TakeSymbolContent\(\)](#).

4.19.6.5 GetLongModInverses()

```
int GetLongModInverses (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * ia,
    WORD * nia,
    UWORD * ib,
    WORD * nib ) [extern]
```

Definition at line 1509 of file [reken.c](#).

4.19.6.6 RatToLine()

```
void RatToLine (
    UWORD * a,
    WORD na ) [extern]
```

Definition at line 337 of file [sch.c](#).

4.19.6.7 RatioFind()

```
int RatioFind (
    PHEAD WORD * term,
    WORD * params ) [extern]
```

Definition at line 62 of file [ratio.c](#).

4.19.6.8 RatioGen()

```
int RatioGen (  
    PHEAD WORD * term,  
    WORD * params,  
    WORD num,  
    WORD level ) [extern]
```

Definition at line 170 of file [ratio.c](#).

4.19.6.9 ReNumber()

```
WORD ReNumber (  
    PHEAD WORD * term ) [extern]
```

Definition at line 80 of file [reshuf.c](#).

4.19.6.10 ReadSnum()

```
WORD ReadSnum (  
    UBYTE ** p ) [extern]
```

Definition at line 1975 of file [tools.c](#).

4.19.6.11 Remain10()

```
WORD Remain10 (  
    UWORD * a,  
    WORD * na ) [extern]
```

Definition at line 1660 of file [reken.c](#).

4.19.6.12 Remain4()

```
WORD Remain4 (  
    UWORD * a,  
    WORD * na ) [extern]
```

Definition at line 1687 of file [reken.c](#).

4.19.6.13 ResetScratch()

```
int ResetScratch (  
    void ) [extern]
```

Definition at line 234 of file [store.c](#).

4.19.6.14 ResolveSet()

```
int ResolveSet (
    PHEAD WORD * from,
    WORD * to,
    WORD * subs ) [extern]
```

Definition at line [1361](#) of file [wildcard.c](#).

4.19.6.15 RevertScratch()

```
int RevertScratch (
    void ) [extern]
```

Definition at line [189](#) of file [store.c](#).

4.19.6.16 ScanFunctions()

```
int ScanFunctions (
    PHEAD WORD * inpat,
    WORD * inter,
    WORD par ) [extern]
```

Definition at line [1618](#) of file [function.c](#).

4.19.6.17 SeekScratch()

```
void SeekScratch (
    FILEHANDLE * fi,
    POSITION * pos ) [extern]
```

Definition at line [63](#) of file [store.c](#).

4.19.6.18 SetEndScratch()

```
void SetEndScratch (
    FILEHANDLE * f,
    POSITION * position ) [extern]
```

Definition at line [74](#) of file [store.c](#).

4.19.6.19 SetEndHScratch()

```
void SetEndHScratch (
    FILEHANDLE * f,
    POSITION * position ) [extern]
```

Definition at line [88](#) of file [store.c](#).

4.19.6.20 SetFileIndex()

```
int SetFileIndex (
    void ) [extern]
```

Reads the next file index and puts it into AR.StoreData.Index. TODO

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 2320 of file [store.c](#).

References [WriteStoreHeader\(\)](#).

Here is the call graph for this function:



4.19.6.21 Sflush()

```
int Sflush (
    FILEHANDLE * fi ) [extern]
```

Puts the contents of a buffer to output Only to be used when there is a single patch in the large buffer.

Parameters

<i>fi</i>	The filesystem (or its cache) to which the patch should be written
-----------	--

Definition at line 1384 of file [sort.c](#).

References [FiLe::handle](#).

Referenced by [MergePatches\(\)](#).

4.19.6.22 Simplify()

```
int Simplify (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD * nb ) [extern]
```

Definition at line 531 of file [reken.c](#).

4.19.6.23 SortWild()

```
int SortWild (
    WORD * w,
    WORD nw ) [extern]
```

Sorts the wildcard entries in the parameter w. Double entries are removed. Full space taken is nw words. Routine serves for the reading of wildcards in the compiler. The entries come in the format: (type,4,number,0) in which the zero is reserved for the future replacement of 'number'.

Parameters

<i>w</i>	buffer with wildcard entries.
<i>nw</i>	number of wildcard entries.

Returns

Normal conventions (OK -> 0)

Definition at line [4763](#) of file [sort.c](#).

4.19.6.24 LocateBase()

```
FILE * LocateBase (
    char ** name,
    char ** newname,
    char * iomode ) [extern]
```

Definition at line [225](#) of file [minos.c](#).

4.19.6.25 SplitMerge()

```
LONG SplitMerge (
    PHEAD WORD ** Pointer,
    LONG number ) [extern]
```

Algorithm by J.A.M.Vermaseren (31-7-1988)

Note that AN.SplitScratch and AN.InScratch are used also in GarbHand

Merge sort in memory. The input is an array of pointers. Sorting is done recursively by dividing the array in two equal parts and calling SplitMerge for each. When the parts are small enough we can do the compare and take the appropriate action. An addition is that we look for 'runs'. Sequences that are already ordered. This happens a lot when there is very little action in a module. This made FORM faster by a few percent.

Parameters

<i>Pointer</i>	The array of pointers to the terms to be sorted.
<i>number</i>	The number of pointers in Pointer.


The terms are supposed to be sitting in the small buffer and there is supposed to be an extension to this buffer for when there are two terms that should be added and the result takes more space than each of the original terms. The notation guarantees that the result never needs more space than the sum of the spaces of the original terms.

Definition at line 3372 of file [sort.c](#).

References [AddCoef\(\)](#), [AddPoly\(\)](#), and [SplitMerge\(\)](#).

Referenced by [EndSort\(\)](#), [SplitMerge\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

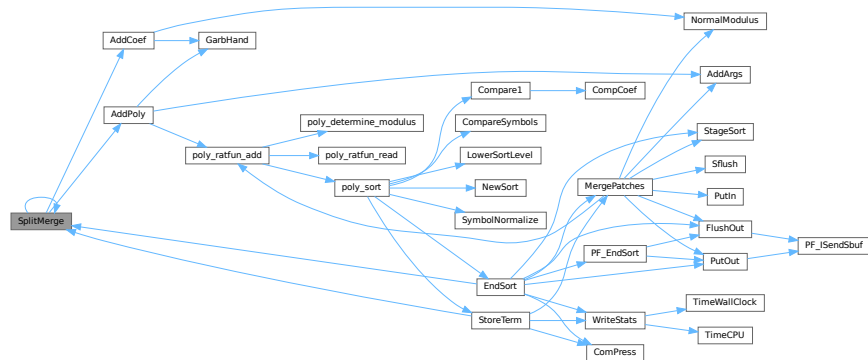

4.19.6.26 StoreTerm()

```
int StoreTerm (
    PHEAD WORD * term ) [extern]
```

The central routine to accept terms, store them and keep things at least partially sorted. A call to EndSort will then complete storing and sorting.

Parameters

<i>term</i>	The term to be stored
-------------	-----------------------

Returns


Regular return conventions (OK -> 0)

Definition at line 4550 of file [sort.c](#).

References [ComPress\(\)](#), [MergePatches\(\)](#), [SplitMerge\(\)](#), and [WriteStats\(\)](#).

Referenced by [Generator\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [PF_Processor\(\)](#), [poly_sort\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), and [TakeArgContent\(\)](#).

Here is the call graph for this function:

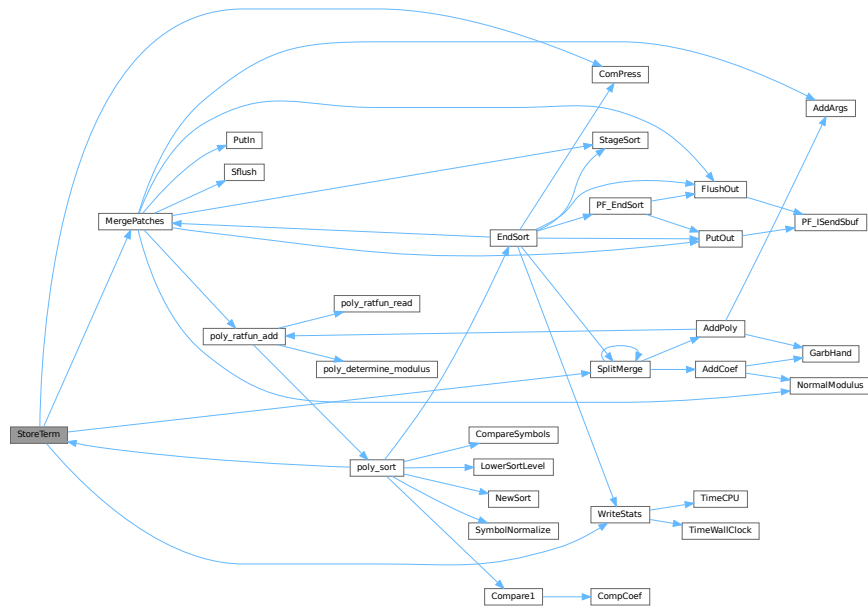

4.19.6.27 SubPLon()

```

void SubPLon (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc ) [extern]
  
```

Definition at line 804 of file [reken.c](#).

4.19.6.28 Substitute()

```

void Substitute (
    PHEAD WORD * term,
    WORD * pattern,
    WORD power ) [extern]
  
```

Definition at line 641 of file [pattern.c](#).

4.19.6.29 SymFind()

```

int SymFind (
    PHEAD WORD * term,
    WORD * params ) [extern]
  
```

Definition at line 633 of file [function.c](#).

4.19.6.30 SymGen()

```
int SymGen (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level ) [extern]
```

Definition at line 518 of file [function.c](#).

4.19.6.31 Symmetrize()

```
WORD Symmetrize (
    PHEAD WORD * func,
    WORD * Lijst,
    WORD ngroups,
    WORD gsize,
    WORD type ) [extern]
```

Definition at line 213 of file [function.c](#).

4.19.6.32 FullSymmetrize()

```
int FullSymmetrize (
    PHEAD WORD * fun,
    int type ) [extern]
```

Definition at line 473 of file [function.c](#).

4.19.6.33 TakeModulus()

```
int TakeModulus (
    UWORD * a,
    WORD * na,
    UWORD * cmodvec,
    WORD ncmod,
    WORD par ) [extern]
```

Definition at line 3150 of file [reken.c](#).

4.19.6.34 TakeNormalModulus()

```
int TakeNormalModulus (
    UWORD * a,
    WORD * na,
    UWORD * c,
    WORD nc,
    WORD par ) [extern]
```

Definition at line 3322 of file [reken.c](#).

4.19.6.35 TalToLine()

```
void TalToLine (
    UWORD x ) [extern]
```

Definition at line 522 of file [sch.c](#).

4.19.6.36 TenVec()

```
int TenVec (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level ) [extern]
```

Definition at line 2315 of file [opera.c](#).

4.19.6.37 TenVecFind()

```
int TenVecFind (
    PHEAD WORD * term,
    WORD * params ) [extern]
```

Definition at line 2181 of file [opera.c](#).

4.19.6.38 TermRenumber()

```
int TermRenumber (
    WORD * term,
    RENUMBER renumber,
    WORD nexpr ) [extern]
```

```
!! WORD *memterm=term; static LONG ctrap=0; !!!
```


```
!! ctrap++; !!!
```

Definition at line 2427 of file [store.c](#).

References [ReNuMbEr::func](#), [ReNuMbEr::funnum](#), [ReNuMbEr::indi](#), [ReNuMbEr::indnum](#), [ReNuMbEr::symb](#), [ReNuMbEr::symnum](#), [TermRenumber\(\)](#), [ReNuMbEr::vecnum](#), and [ReNuMbEr::vect](#).

Referenced by [TermRenumber\(\)](#).

Here is the call graph for this function:



4.19.6.39 TestDrop()

```
void TestDrop (
    void ) [extern]
```

Definition at line 484 of file [execute.c](#).

4.19.6.40 PutInVflags()

```
void PutInVflags (
    WORD nexpr ) [extern]
```

Definition at line 562 of file [execute.c](#).

4.19.6.41 TestMatch()

```
int TestMatch (
    PHEAD WORD * term,
    WORD * level ) [extern]
```

This routine governs the pattern matching. If it decides that a substitution should be made, this can be either the insertion of a right hand side (C->rhs) or the automatic generation of terms as a result of an operation (like trace). The object to be replaced is removed from term and a subexpression pointer is inserted. If the substitution is made more than once there can be more subexpression pointers. Its number is positive as it corresponds to the level at which the C->rhs can be found in the compiler output. The subexpression pointer contains the wildcard substitution information. The power is found in *AT.TMout. For operations the subexpression pointer is negative and corresponds to an address in the array AT.TMout. In this array are then the instructions for the routine to be called and its number in the array 'Operations' The format is here: length,functionnumber,length-2 parameters


There is a certain complexity wrt repeat levels. Another complication is the poking of the wildcard values in the subexpression prototype in the compiler buffer. This was how things were done in the past with sequential FORM, but with the advent of TFORM this cannot be maintained. Now, for TFORM we make a copy of it. 7-may-2008 (JV): We cannot yet guarantee that this has been done 100% correctly. There are errors that occur in TFORM only and that may indicate problems.

Definition at line 97 of file [pattern.c](#).

References [AddRHS\(\)](#), [EndSort\(\)](#), [Generator\(\)](#), [CbUf::lhs](#), [LowerSortLevel\(\)](#), and [NewSort\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

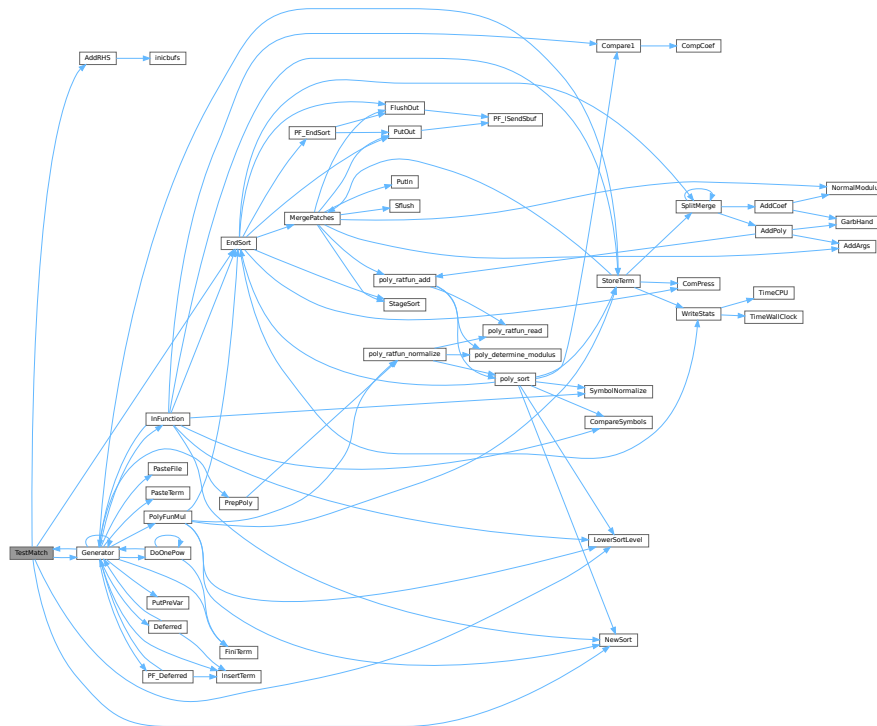

4.19.6.42 TestSub()

```
WORD TestSub (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 685 of file [proces.c](#).

4.19.6.43 TimeCPU()

```
LONG TimeCPU (
    WORD par ) [extern]
```

Returns the CPU time.

Parameters

<i>par</i>	If zero, the CPU time will be reset to 0.
------------	---

Returns

The CPU time in milliseconds.

Definition at line 3468 of file [tools.c](#).

Referenced by [PF_GetSlaveTimes\(\)](#), [PF_Processor\(\)](#), and [WriteStats\(\)](#).

4.19.6.44 TimeChildren()

```
LONG TimeChildren (
    WORD par ) [extern]
```

Definition at line 3450 of file [tools.c](#).

4.19.6.45 TimeWallClock()

```
LONG TimeWallClock (
    WORD par ) [extern]
```

Returns the wall-clock time.

Parameters

<i>par</i>	If zero, the wall-clock time will be reset to 0.
------------	--

Returns

The wall-clock time in centiseconds.

Definition at line 3394 of file [tools.c](#).

Referenced by [DoCheckpoint\(\)](#), [DoRecovery\(\)](#), [find_Horner_MCTS\(\)](#), [optimize_expression_given_Horner\(\)](#), [optimize_greedy\(\)](#), and [WriteStats\(\)](#).

4.19.6.46 ToStorage()

```
int ToStorage (
    EXPRESSIONS e,
    POSITION * length ) [extern]
```

Definition at line 2016 of file [store.c](#).

4.19.6.47 TokenToLine()

```
void TokenToLine (
    UBYTE * s ) [extern]
```

Definition at line 551 of file [sch.c](#).

4.19.6.48 Trace4()

```
int Trace4 (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level ) [extern]
```

Definition at line 695 of file [opera.c](#).

4.19.6.49 Trace4Gen()

```
int Trace4Gen (
    PHEAD TRACES * t,
    WORD number ) [extern]
```

Definition at line 858 of file [opera.c](#).

4.19.6.50 Trace4no()

```
int Trace4no (
    WORD number,
    WORD * kron,
    TRACES * t ) [extern]
```

Definition at line 418 of file [opera.c](#).

4.19.6.51 TraceFind()

```
int TraceFind (
    PHEAD WORD * term,
    WORD * params ) [extern]
```

Definition at line 1856 of file [opera.c](#).

4.19.6.52 TraceN()

```
int TraceN (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level ) [extern]
```

Definition at line 1384 of file [opera.c](#).

4.19.6.53 TraceNgen()

```
int TraceNgen (
    PHEAD TRACES * t,
    WORD number ) [extern]
```

Definition at line 1449 of file [opera.c](#).

4.19.6.54 TraceNno()

```
WORD TraceNno (
    WORD number,
    WORD * kron,
    TRACES * t ) [extern]
```

Definition at line 1343 of file [opera.c](#).

4.19.6.55 Traces()

```
int Traces (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level ) [extern]
```

Definition at line 1834 of file [opera.c](#).

4.19.6.56 Trick()

```
WORD Trick (
    WORD * in,
    TRACES * t ) [extern]
```

Definition at line 331 of file [opera.c](#).

4.19.6.57 TryDo()

```
int TryDo (
    PHEAD WORD * term,
    WORD * pattern,
    WORD level ) [extern]
```

Definition at line 1072 of file [reshuf.c](#).

4.19.6.58 UnPack()

```
void UnPack (
    UWORD * a,
    WORD na,
    WORD * denom,
    WORD * numer ) [extern]
```

Definition at line 100 of file [reken.c](#).

4.19.6.59 VarStore()

```
int VarStore (
    UBYTE * s,
    WORD n,
    WORD name,
    WORD namesize ) [extern]
```

Definition at line 2369 of file [store.c](#).

4.19.6.60 WildFill()

```
WORD WildFill (
    PHEAD WORD * to,
    WORD * from,
    WORD * sub ) [extern]
```

Definition at line 65 of file [wildcard.c](#).

4.19.6.61 WriteAll()

```
int WriteAll (
    void ) [extern]
```

Definition at line 2504 of file [sch.c](#).

4.19.6.62 WriteOne()

```
int WriteOne (
    UBYTE * name,
    int alreadyinline,
    int nosemi,
    WORD plus ) [extern]
```

Definition at line 2730 of file [sch.c](#).

4.19.6.63 WriteArgument()

```
void WriteArgument (
    WORD * t ) [extern]
```

Definition at line 1424 of file [sch.c](#).

4.19.6.64 WriteExpression()

```
int WriteExpression (
    WORD * terms,
    LONG ltot ) [extern]
```

Definition at line 2473 of file [sch.c](#).

4.19.6.65 WriteInnerTerm()

```
int WriteInnerTerm (
    WORD * term,
    WORD first ) [extern]
```

Definition at line 1951 of file [sch.c](#).

4.19.6.66 WriteLists()

```
void WriteLists (
    void ) [extern]
```

Definition at line 810 of file [sch.c](#).

4.19.6.67 WriteSetup()

```
void WriteSetup (
    void ) [extern]
```

Definition at line 800 of file [setfile.c](#).

4.19.6.68 WriteStats()

```
void WriteStats (
    POSITION * plspace,
    WORD par,
    WORD checkLogType ) [extern]
```

Writes the statistics.

Parameters

<i>plspace</i>	The size in bytes currently occupied
<i>par</i>	par = 0 = STATSSPLITMERGE after a splitmerge. par = 1 = STATSMERGETOFILE after merge to sortfile. par = 2 = STATSPOSTSORT after the sort
<i>checkLogType</i>	== CHECKLOGTYPE: The output should not go to the log file if AM.LogType is 1.


current expression is to be found in AR.CurExpr. terms are in S->TermsLeft. S->GenTerms.

Definition at line 127 of file [sort.c](#).

References [TimeCPU\(\)](#), and [TimeWallClock\(\)](#).

Referenced by [EndSort\(\)](#), [PF_Processor\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

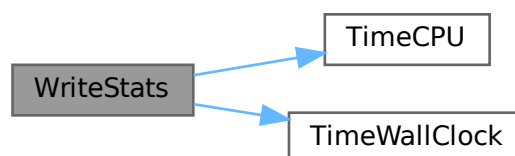

4.19.6.69 WriteSubTerm()

```
int WriteSubTerm (
    WORD * stern,
    WORD first ) [extern]
```

Definition at line 1542 of file [sch.c](#).

4.19.6.70 WriteTerm()

```
int WriteTerm (
    WORD * term,
    WORD * lbrac,
    WORD first,
    WORD prtf,
    WORD br ) [extern]
```

Definition at line 2151 of file [sch.c](#).

4.19.6.71 execarg()

```
int execarg (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 56 of file [argument.c](#).

4.19.6.72 execterm()

```
int execterm (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 1775 of file [argument.c](#).

4.19.6.73 SpecialCleanup()

```
void SpecialCleanup (
    PHEAD0 ) [extern]
```

Definition at line 1624 of file [execute.c](#).

4.19.6.74 SetMods()

```
void SetMods (
    void ) [extern]
```

Definition at line 1638 of file [execute.c](#).

4.19.6.75 UnSetMods()

```
void UnSetMods (
    void ) [extern]
```

Definition at line 1656 of file [execute.c](#).

4.19.6.76 DoExecute()

```
int DoExecute (
    WORD par,
    WORD skip ) [extern]
```

Definition at line 616 of file [execute.c](#).

4.19.6.77 SetScratch()

```
void SetScratch (
    FILEHANDLE * f,
    POSITION * position ) [extern]
```

Definition at line 114 of file [store.c](#).

4.19.6.78 Warning()

```
void Warning (
    char * s ) [extern]
```

Definition at line 790 of file [message.c](#).

4.19.6.79 HighWarning()

```
void HighWarning (
    char * s ) [extern]
```

Definition at line 802 of file [message.c](#).

4.19.6.80 SpareTable()

```
int SpareTable (
    TABLES TT ) [extern]
```

Definition at line 694 of file [tables.c](#).

4.19.6.81 strDup1()

```
UBYTE * strDup1 (
    UBYTE * instring,
    char * ifwrong ) [extern]
```

Definition at line 1906 of file [tools.c](#).

4.19.6.82 Malloc1()

```
void * Malloc1 (
    LONG size,
    const char * messageifwrong ) [extern]
```

Definition at line 2224 of file [tools.c](#).

4.19.6.83 DoTail()

```
int DoTail (
    int argc,
    UBYTE ** argv ) [extern]
```

Definition at line 237 of file [startup.c](#).

4.19.6.84 OpenInput()

```
int OpenInput (
    void ) [extern]
```

Definition at line 542 of file [startup.c](#).

4.19.6.85 PutPreVar()

```
int PutPreVar (
    UBYTE * name,
    UBYTE * value,
    UBYTE * args,
    int mode ) [extern]
```

Inserts/Updates a preprocessor variable in the name administration.

Parameters

<i>name</i>	Character string with the variable name.
<i>value</i>	Character string with a possible value. Special case: if this argument is zero, then we have no value. Note: This is different from having an empty argument! This should only occur when the name starts with a ?
<i>args</i>	Character string with possible arguments.
<i>mode</i>	=0: always create a new name entry, =1: try to do a redefinition if possible.

Returns

Index of used entry in name list.

Definition at line 724 of file [pre.c](#).

Referenced by [ClearOptimize\(\)](#), [Generator\(\)](#), [Optimize\(\)](#), [PF_BroadcastRedefinedPreVars\(\)](#), [StartVariables\(\)](#), and [TheDefine\(\)](#).

4.19.6.86 Error0()

```
void Error0 (
    char * s ) [extern]
```

Definition at line 56 of file [message.c](#).

4.19.6.87 Error1()

```
void Error1 (
    char * s,
    UBYTE * t ) [extern]
```

Definition at line 67 of file [message.c](#).

4.19.6.88 Error2()

```
void Error2 (
    char * s1,
    char * s2,
    UBYTE * t ) [extern]
```

Definition at line 78 of file [message.c](#).

4.19.6.89 ReadFromStream()

```
UBYTE ReadFromStream (
    STREAM * stream ) [extern]
```

Definition at line 151 of file [tools.c](#).

4.19.6.90 GetFromStream()

```
UBYTE GetFromStream (
    STREAM * stream ) [extern]
```

Definition at line 286 of file [tools.c](#).

4.19.6.91 LookInStream()

```
UBYTE LookInStream (
    STREAM * stream ) [extern]
```

Definition at line 309 of file [tools.c](#).

4.19.6.92 OpenStream()

```
STREAM * OpenStream (
    UBYTE * name,
    int type,
    int prevarmode,
    int raiselow ) [extern]
```

Definition at line 321 of file [tools.c](#).

4.19.6.93 LocateFile()

```
int LocateFile (
    UBYTE ** name,
    int type ) [extern]
```

Definition at line 576 of file [tools.c](#).

4.19.6.94 CloseStream()

```
STREAM * CloseStream (
    STREAM * stream ) [extern]
```

Definition at line 663 of file [tools.c](#).

4.19.6.95 PositionStream()

```
void PositionStream (
    STREAM * stream,
    LONG position ) [extern]
```

Definition at line 825 of file [tools.c](#).

4.19.6.96 ReverseStatements()

```
int ReverseStatements (
    STREAM * stream ) [extern]
```

Definition at line 857 of file [tools.c](#).

4.19.6.97 ProcessOption()

```
int ProcessOption (
    UBYTE * s1,
    UBYTE * s2,
    int filetype ) [extern]
```

Definition at line [182](#) of file [setfile.c](#).

4.19.6.98 DoSetups()

```
int DoSetups (
    void ) [extern]
```

Definition at line [132](#) of file [setfile.c](#).

4.19.6.99 TerminateImpl()

```
void TerminateImpl (
    int errorcode,
    const char * file,
    int line,
    const char * function ) [extern]
```

Definition at line [1869](#) of file [startup.c](#).

4.19.6.100 GetNode()

```
NAMENODE * GetNode (
    NAMETREE * nametree,
    UBYTE * name ) [extern]
```

Definition at line [49](#) of file [names.c](#).

4.19.6.101 AddName()

```
int AddName (
    NAMETREE * nametree,
    UBYTE * name,
    WORD type,
    WORD number,
    int * nodenum ) [extern]
```

Definition at line [71](#) of file [names.c](#).

4.19.6.102 GetName()

```
int GetName (
    NAMETREE * nametree,
    UBYTE * namein,
    WORD * number,
    int par ) [extern]
```

Definition at line 252 of file [names.c](#).

4.19.6.103 GetFunction()

```
UBYTE * GetFunction (
    UBYTE * s,
    WORD * funnum ) [extern]
```

Definition at line 342 of file [names.c](#).

4.19.6.104 GetNumber()

```
UBYTE * GetNumber (
    UBYTE * s,
    WORD * num ) [extern]
```

Definition at line 388 of file [names.c](#).

4.19.6.105 GetLastExprName()

```
int GetLastExprName (
    UBYTE * name,
    WORD * number ) [extern]
```

Definition at line 438 of file [names.c](#).

4.19.6.106 GetAutoName()

```
int GetAutoName (
    UBYTE * name,
    WORD * number ) [extern]
```

Definition at line 479 of file [names.c](#).

4.19.6.107 GetVar()

```
int GetVar (
    UBYTE * name,
    WORD * type,
    WORD * number,
    int wantedtype,
    int par ) [extern]
```

Definition at line 524 of file [names.c](#).

4.19.6.108 MakeDubious()

```
int MakeDubious (
    NAMETREE * nametree,
    UBYTE * name,
    WORD * number ) [extern]
```

Definition at line 2697 of file [names.c](#).

4.19.6.109 GetOName()

```
int GetOName (
    NAMETREE * nametree,
    UBYTE * name,
    WORD * number,
    int par ) [extern]
```

Definition at line 460 of file [names.c](#).

4.19.6.110 DumpTree()

```
void DumpTree (
    NAMETREE * nametree ) [extern]
```

Definition at line 602 of file [names.c](#).

4.19.6.111 DumpNode()

```
void DumpNode (
    NAMETREE * nametree,
    WORD node,
    WORD depth ) [extern]
```

Definition at line 615 of file [names.c](#).

4.19.6.112 LinkTree()

```
void LinkTree (
    NAMETREE * tree,
    WORD offset,
    WORD numnodes ) [extern]
```

Definition at line 784 of file [names.c](#).

4.19.6.113 CopyTree()

```
void CopyTree (
    NAMETREE * newtree,
    NAMETREE * oldtree,
    WORD node,
    WORD par ) [extern]
```

Definition at line 696 of file [names.c](#).

4.19.6.114 CompactifyTree()

```
int CompactifyTree (
    NAMETREE * nametree,
    WORD par ) [extern]
```

Definition at line 634 of file [names.c](#).

4.19.6.115 MakeNameTree()

```
NAMETREE * MakeNameTree (
    void ) [extern]
```

Definition at line 815 of file [names.c](#).

4.19.6.116 FreeNameTree()

```
void FreeNameTree (
    NAMETREE * n ) [extern]
```

Definition at line 834 of file [names.c](#).

4.19.6.117 AddExpression()

```
int AddExpression (
    UBYTE * name,
    int x,
    int y ) [extern]
```

Definition at line 2748 of file [names.c](#).

4.19.6.118 AddSymbol()

```
int AddSymbol (
    UBYTE * name,
    int minpow,
    int maxpow,
    int cplx,
    int dim ) [extern]
```

Definition at line 920 of file [names.c](#).

4.19.6.119 AddDollar()

```
int AddDollar (
    UBYTE * name,
    WORD type,
    WORD * start,
    LONG size ) [extern]
```

Definition at line 2606 of file [names.c](#).

4.19.6.120 ReplaceDollar()

```
int ReplaceDollar (
    WORD number,
    WORD newtype,
    WORD * newstart,
    LONG newsize ) [extern]
```

Definition at line [2650](#) of file [names.c](#).

4.19.6.121 DollarRaiseLow()

```
int DollarRaiseLow (
    UBYTE * name,
    LONG value ) [extern]
```

Definition at line [2552](#) of file [dollar.c](#).

4.19.6.122 AddVector()

```
int AddVector (
    UBYTE * name,
    int cplx,
    int dim ) [extern]
```

Definition at line [1244](#) of file [names.c](#).

4.19.6.123 AddDubious()

```
int AddDubious (
    UBYTE * name ) [extern]
```

Definition at line [2683](#) of file [names.c](#).

4.19.6.124 AddIndex()

```
int AddIndex (
    UBYTE * name,
    int dim,
    int dim4 ) [extern]
```

Definition at line [1088](#) of file [names.c](#).

4.19.6.125 DoDimension()

```
UBYTE * DoDimension (
    UBYTE * s,
    int * dim,
    int * dim4 ) [extern]
```

Definition at line [1160](#) of file [names.c](#).

4.19.6.126 AddFunction()

```
int AddFunction (
    UBYTE * name,
    int comm,
    int istensor,
    int cplx,
    int symprop,
    int dim,
    int argmax,
    int argmin ) [extern]
```

Definition at line 1326 of file [names.c](#).

4.19.6.127 CoCommuteInSet()

```
int CoCommuteInSet (
    UBYTE * s ) [extern]
```

Definition at line 1356 of file [names.c](#).

4.19.6.128 CoFunction()

```
int CoFunction (
    UBYTE * s,
    int comm,
    int istensor ) [extern]
```

Definition at line 1446 of file [names.c](#).

4.19.6.129 TestName()

```
int TestName (
    UBYTE * name ) [extern]
```

Definition at line 3258 of file [names.c](#).

4.19.6.130 AddSet()

```
int AddSet (
    UBYTE * name,
    WORD dim ) [extern]
```

Definition at line 2126 of file [names.c](#).

4.19.6.131 DoElements()

```
int DoElements (
    UBYTE * s,
    SETS set,
    UBYTE * name ) [extern]
```

Definition at line 2159 of file [names.c](#).

4.19.6.132 DoTempSet()

```
int DoTempSet (
    UBYTE * from,
    UBYTE * to ) [extern]
```

Definition at line [2484](#) of file [names.c](#).

4.19.6.133 NameConflict()

```
int NameConflict (
    int type,
    UBYTE * name ) [extern]
```

Definition at line [2732](#) of file [names.c](#).

4.19.6.134 OpenFile()

```
int OpenFile (
    char * name ) [extern]
```

Definition at line [985](#) of file [tools.c](#).

4.19.6.135 OpenAddFile()

```
int OpenAddFile (
    char * name ) [extern]
```

Definition at line [1004](#) of file [tools.c](#).

4.19.6.136 ReOpenFile()

```
int ReOpenFile (
    char * name ) [extern]
```

Definition at line [1025](#) of file [tools.c](#).

4.19.6.137 CreateFile()

```
int CreateFile (
    char * name ) [extern]
```

Definition at line [1045](#) of file [tools.c](#).

4.19.6.138 CreateLogFile()

```
int CreateLogFile (
    char * name ) [extern]
```

Definition at line [1062](#) of file [tools.c](#).

4.19.6.139 CloseFile()

```
void CloseFile (
    int handle ) [extern]
```

Definition at line 1080 of file [tools.c](#).

4.19.6.140 CopyFile()

```
int CopyFile (
    char * source,
    char * dest ) [extern]
```

Copies a file with name *source to a file named *dest. The involved files must not be open. Returns non-zero if an error occurred. Uses if possible the combined large and small sorting buffers as cache.

Definition at line 1103 of file [tools.c](#).

Referenced by [DoRecovery\(\)](#).

4.19.6.141 CreateHandle()

```
int CreateHandle (
    void ) [extern]
```

Definition at line 1164 of file [tools.c](#).

4.19.6.142 ReadFile()

```
LONG ReadFile (
    int handle,
    UBYTE * buffer,
    LONG size ) [extern]
```

Definition at line 1219 of file [tools.c](#).

4.19.6.143 ReadPosFile()

```
LONG ReadPosFile (
    PHEAD FILEHANDLE * fi,
    UBYTE * buffer,
    LONG size,
    POSITION * pos ) [extern]
```

Definition at line 1269 of file [tools.c](#).

4.19.6.144 WriteFileToFile()

```
LONG WriteFileToFile (
    int handle,
    UBYTE * buffer,
    LONG size ) [extern]
```

Definition at line [1335](#) of file [tools.c](#).

4.19.6.145 SeekFile()

```
void SeekFile (
    int handle,
    POSITION * offset,
    int origin ) [extern]
```

Definition at line [1373](#) of file [tools.c](#).

4.19.6.146 TellFile()

```
LONG TellFile (
    int handle ) [extern]
```

Definition at line [1398](#) of file [tools.c](#).

4.19.6.147 FlushFile()

```
void FlushFile (
    int handle ) [extern]
```

Definition at line [1422](#) of file [tools.c](#).

4.19.6.148 GetPosFile()

```
int GetPosFile (
    int handle,
    fpos_t * pospointer ) [extern]
```

Definition at line [1436](#) of file [tools.c](#).

4.19.6.149 SetPosFile()

```
int SetPosFile (
    int handle,
    fpos_t * pospointer ) [extern]
```

Definition at line [1450](#) of file [tools.c](#).

4.19.6.150 SynchFile()

```
void SynchFile (  
    int handle ) [extern]
```

Definition at line 1470 of file [tools.c](#).

4.19.6.151 TruncateFile()

```
void TruncateFile (  
    int handle ) [extern]
```

Definition at line 1492 of file [tools.c](#).

4.19.6.152 GetChannel()

```
int GetChannel (  
    char * name,  
    int mode ) [extern]
```

Definition at line 1512 of file [tools.c](#).

4.19.6.153 GetAppendChannel()

```
int GetAppendChannel (  
    char * name ) [extern]
```

Definition at line 1548 of file [tools.c](#).

4.19.6.154 CloseChannel()

```
int CloseChannel (  
    char * name ) [extern]
```

Definition at line 1578 of file [tools.c](#).

4.19.6.155 inictable()

```
void inictable (  
    void ) [extern]
```

Definition at line 314 of file [compiler.c](#).

4.19.6.156 findcommand()

```
KEYWORD * findcommand (  
    UBYTE * in ) [extern]
```

Definition at line 340 of file [compiler.c](#).

4.19.6.157 inicbufs()

```
int inicbufs (
    void ) [extern]
```

Creates a new compiler buffer and returns its ID number.

Returns

The ID number for the new compiler buffer.

Definition at line 47 of file [comtool.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [CbUf::lhs](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Referenced by [AddRHS\(\)](#), and [StartVariables\(\)](#).

4.19.6.158 StartFiles()

```
void StartFiles (
    void ) [extern]
```

Definition at line 958 of file [tools.c](#).

4.19.6.159 MakeDate()

```
UBYTE * MakeDate (
    void ) [extern]
```

Definition at line 2092 of file [tools.c](#).

4.19.6.160 PreProcessor()

```
void PreProcessor (
    void ) [extern]
```

Definition at line 953 of file [pre.c](#).

4.19.6.161 FromList()

```
void * FromList (
    LIST * L ) [extern]
```

Definition at line 2697 of file [tools.c](#).

4.19.6.162 From0List()

```
void * From0List (
    LIST * L ) [extern]
```

Definition at line 2723 of file [tools.c](#).

4.19.6.163 FromVarList()

```
void * FromVarList (
    LIST * L ) [extern]
```

Definition at line 2752 of file [tools.c](#).

4.19.6.164 DoubleList()

```
int DoubleList (
    void *** lijst,
    int * oldsize,
    int objectsize,
    char * nameoftype ) [extern]
```

Definition at line 2794 of file [tools.c](#).

4.19.6.165 DoubleLList()

```
int DoubleLList (
    void *** lijst,
    LONG * oldsize,
    int objectsize,
    char * nameoftype ) [extern]
```

Definition at line 2846 of file [tools.c](#).

4.19.6.166 DoubleBuffer()

```
void DoubleBuffer (
    void ** start,
    void ** stop,
    int size,
    char * text ) [extern]
```

Definition at line 2894 of file [tools.c](#).

4.19.6.167 ExpandBuffer()

```
void ExpandBuffer (
    void ** buffer,
    LONG * oldsize,
    int type ) [extern]
```

Definition at line 2919 of file [tools.c](#).

4.19.6.168 iexp()

```
LONG iexp (
    LONG x,
    int p ) [extern]
```

Definition at line [2943](#) of file [tools.c](#).

4.19.6.169 IsLikeVector()

```
int IsLikeVector (
    WORD * arg ) [extern]
```

Definition at line [3146](#) of file [tools.c](#).

4.19.6.170 AreArgsEqual()

```
int AreArgsEqual (
    WORD * arg1,
    WORD * arg2 ) [extern]
```

Definition at line [3174](#) of file [tools.c](#).

4.19.6.171 CompareArgs()

```
int CompareArgs (
    WORD * arg1,
    WORD * arg2 ) [extern]
```

Definition at line [3193](#) of file [tools.c](#).

4.19.6.172 SkipField()

```
UBYTE * SkipField (
    UBYTE * s,
    int level ) [extern]
```

Definition at line [1948](#) of file [tools.c](#).

4.19.6.173 StrCmp()

```
int StrCmp (
    UBYTE * s1,
    UBYTE * s2 ) [extern]
```

Definition at line [1702](#) of file [tools.c](#).

4.19.6.174 StrICmp()

```
int StrICmp (
    UBYTE * s1,
    UBYTE * s2 ) [extern]
```

Definition at line 1713 of file [tools.c](#).

4.19.6.175 StrHICmp()

```
int StrHICmp (
    UBYTE * s1,
    UBYTE * s2 ) [extern]
```

Definition at line 1724 of file [tools.c](#).

4.19.6.176 StrICont()

```
int StrICont (
    UBYTE * s1,
    UBYTE * s2 ) [extern]
```

Definition at line 1735 of file [tools.c](#).

4.19.6.177 CmpArray()

```
int CmpArray (
    WORD * t1,
    WORD * t2,
    WORD n ) [extern]
```

Definition at line 1747 of file [tools.c](#).

4.19.6.178 ConWord()

```
int ConWord (
    UBYTE * s1,
    UBYTE * s2 ) [extern]
```

Definition at line 1761 of file [tools.c](#).

4.19.6.179 StrLen()

```
int StrLen (
    UBYTE * s ) [extern]
```

Definition at line 1773 of file [tools.c](#).

4.19.6.180 GetPreVar()

```
UBYTE * GetPreVar (
    UBYTE * name,
    int flag ) [extern]
```

Definition at line 542 of file [pre.c](#).

4.19.6.181 ToGeneral()

```
void ToGeneral (
    WORD * r,
    WORD * m,
    WORD par ) [extern]
```

Definition at line 2974 of file [tools.c](#).

4.19.6.182 ToPolyFunGeneral()

```
WORD ToPolyFunGeneral (
    PHEAD WORD * term ) [extern]
```

Definition at line 3071 of file [tools.c](#).

4.19.6.183 ToFast()

```
int ToFast (
    WORD * r,
    WORD * m ) [extern]
```

Definition at line 3018 of file [tools.c](#).

4.19.6.184 GetSetupPar()

```
SETUPPARAMETERS * GetSetupPar (
    UBYTE * s ) [extern]
```

Definition at line 337 of file [setfile.c](#).

4.19.6.185 RecalcSetups()

```
int RecalcSetups (
    void ) [extern]
```

Definition at line 358 of file [setfile.c](#).

4.19.6.186 AllocSetups()

```
int AllocSetups (
    void ) [extern]
```

Definition at line 405 of file [setfile.c](#).

4.19.6.187 AllocSort()

```
SORTING * AllocSort (
    LONG inLargeSize,
    LONG inSmallSize,
    LONG inSmallEsize,
    LONG inTermsInSmall,
    int inMaxPatches,
    int inMaxFpatches,
    LONG inIOSize,
    int level ) [extern]
```

Definition at line 858 of file [setfile.c](#).

4.19.6.188 AllocSortFileName()

```
void AllocSortFileName (
    SORTING * sort ) [extern]
```

Definition at line 1008 of file [setfile.c](#).

4.19.6.189 LoadInputFile()

```
UBYTE * LoadInputFile (
    UBYTE * filename,
    int type ) [extern]
```

Definition at line 112 of file [tools.c](#).

4.19.6.190 GetInput()

```
UBYTE GetInput (
    void ) [extern]
```

Definition at line 138 of file [pre.c](#).

4.19.6.191 ClearPushback()

```
void ClearPushback (
    void ) [extern]
```

Definition at line 167 of file [pre.c](#).

4.19.6.192 GetChar()

```
UBYTE GetChar (
    int level ) [extern]
```

Definition at line 185 of file [pre.c](#).

4.19.6.193 CharOut()

```
void CharOut (
    UBYTE c ) [extern]
```

Definition at line 495 of file [pre.c](#).

4.19.6.194 UnsetAllowDelay()

```
void UnsetAllowDelay (
    void ) [extern]
```

Definition at line 516 of file [pre.c](#).

4.19.6.195 PopPreVars()

```
void PopPreVars (
    int tonumber ) [extern]
```

Definition at line 826 of file [pre.c](#).

4.19.6.196 IniModule()

```
void IniModule (
    int type ) [extern]
```

Definition at line 841 of file [pre.c](#).

4.19.6.197 IniSpecialModule()

```
void IniSpecialModule (
    int type ) [extern]
```

Definition at line 943 of file [pre.c](#).

4.19.6.198 ModuleInstruction()

```
int ModuleInstruction (
    int * moduletype,
    int * specialtype ) [extern]
```

Definition at line 76 of file [module.c](#).

4.19.6.199 PreProInstruction()

```
int PreProInstruction (
    void ) [extern]
```

Definition at line 1172 of file [pre.c](#).

4.19.6.200 LoadInstruction()

```
int LoadInstruction (
    int mode ) [extern]
```

Definition at line 1260 of file [pre.c](#).

4.19.6.201 LoadStatement()

```
int LoadStatement (
    int type ) [extern]
```

Definition at line 1463 of file [pre.c](#).

4.19.6.202 FindKeyWord()

```
KEYWORD * FindKeyWord (
    UBYTE * theword,
    KEYWORD * table,
    int size ) [extern]
```

Definition at line 1969 of file [pre.c](#).

4.19.6.203 FindInKeyWord()

```
KEYWORD * FindInKeyWord (
    UBYTE * theword,
    KEYWORD * table,
    int size ) [extern]
```

Definition at line 2000 of file [pre.c](#).

4.19.6.204 DoDefine()

```
int DoDefine (
    UBYTE * s ) [extern]
```

Definition at line 2165 of file [pre.c](#).

4.19.6.205 DoRedefine()

```
int DoRedefine (
    UBYTE * s ) [extern]
```

Definition at line 2175 of file [pre.c](#).

4.19.6.206 TheDefine()

```
int TheDefine (
    UBYTE * s,
    int mode ) [extern]
```

Preprocessor assignment. Possible arguments and values are treated and the new preprocessor variable is put into the name administration.

Parameters

<i>s</i>	Pointer to the character string following the preprocessor command.
<i>mode</i>	Bitmask. 0-bit clear: always create a new name entry, 0-bit set: try to redefine an existing name, 1-bit set: ignore preprocessor if/switch status.

Returns

zero: no errors, negative number: errors.

Definition at line 2030 of file [pre.c](#).

References [PutPreVar\(\)](#).

Here is the call graph for this function:



4.19.6.207 TheUndefine()

```
int TheUndefine (
    UBYTE * name ) [extern]
```

Definition at line 2215 of file [pre.c](#).

4.19.6.208 ClearMacro()

```
int ClearMacro (
    UBYTE * name ) [extern]
```

Definition at line 2187 of file [pre.c](#).

4.19.6.209 DoUndefine()

```
int DoUndefine (
    UBYTE * s ) [extern]
```

Definition at line 2269 of file [pre.c](#).

4.19.6.210 DoInclude()

```
int DoInclude (
    UBYTE * s ) [extern]
```

Definition at line 2321 of file [pre.c](#).

4.19.6.211 DoReverseInclude()

```
int DoReverseInclude (
    UBYTE * s ) [extern]
```

Definition at line 2328 of file [pre.c](#).

4.19.6.212 Include()

```
int Include (
    UBYTE * s,
    int type ) [extern]
```

Definition at line 2335 of file [pre.c](#).

4.19.6.213 DoExternal()

```
int DoExternal (
    UBYTE * s ) [extern]
```

Definition at line 5502 of file [pre.c](#).

4.19.6.214 DoToExternal()

```
int DoToExternal (
    UBYTE * s ) [extern]
```

Definition at line 6064 of file [pre.c](#).

4.19.6.215 DoFromExternal()

```
int DoFromExternal (
    UBYTE * s ) [extern]
```

Definition at line 5869 of file [pre.c](#).

4.19.6.216 DoPrompt()

```
int DoPrompt (
    UBYTE * s ) [extern]
```

Definition at line 5584 of file [pre.c](#).

4.19.6.217 DoSetExternal()

```
int DoSetExternal (
    UBYTE * s ) [extern]
```

Definition at line 5617 of file [pre.c](#).

4.19.6.218 DoSetExternalAttr()

```
int DoSetExternalAttr (
    UBYTE * s ) [extern]
```

Definition at line 5687 of file [pre.c](#).

4.19.6.219 DoRmExternal()

```
int DoRmExternal (
    UBYTE * s ) [extern]
```

Definition at line 5804 of file [pre.c](#).

4.19.6.220 DoFactDollar()

```
int DoFactDollar (
    UBYTE * s ) [extern]
```

Definition at line 6711 of file [pre.c](#).

4.19.6.221 GetDollarNumber()

```
WORD GetDollarNumber (
    UBYTE ** inp,
    DOLLARS d ) [extern]
```

Definition at line 6748 of file [pre.c](#).

4.19.6.222 DoSetRandom()

```
int DoSetRandom (
    UBYTE * s ) [extern]
```

Definition at line 6838 of file [pre.c](#).

4.19.6.223 DoOptimize()

```
int DoOptimize (
    UBYTE * s ) [extern]
```

Definition at line 6881 of file [pre.c](#).

4.19.6.224 DoClearOptimize()

```
int DoClearOptimize (
    UBYTE * s ) [extern]
```

Definition at line 7014 of file [pre.c](#).

4.19.6.225 DoSkipExtraSymbols()

```
int DoSkipExtraSymbols (
    UBYTE * s ) [extern]
```

Definition at line 7034 of file [pre.c](#).

4.19.6.226 DoTimeOutAfter()

```
int DoTimeOutAfter (
    UBYTE * s ) [extern]
```

Definition at line 7260 of file [pre.c](#).

4.19.6.227 DoMessage()

```
int DoMessage (
    UBYTE * s ) [extern]
```

Definition at line 3739 of file [pre.c](#).

4.19.6.228 DoPreOut()

```
int DoPreOut (
    UBYTE * s ) [extern]
```

Definition at line 3810 of file [pre.c](#).

4.19.6.229 DoPreAppend()

```
int DoPreAppend (
    UBYTE * s ) [extern]
```

Definition at line [3867](#) of file [pre.c](#).

4.19.6.230 DoPreCreate()

```
int DoPreCreate (
    UBYTE * s ) [extern]
```

Definition at line [3910](#) of file [pre.c](#).

4.19.6.231 DoPreAssign()

```
int DoPreAssign (
    UBYTE * s ) [extern]
```

Definition at line [2134](#) of file [pre.c](#).

4.19.6.232 DoPreBreak()

```
int DoPreBreak (
    UBYTE * s ) [extern]
```

Definition at line [4125](#) of file [pre.c](#).

4.19.6.233 DoPreDefault()

```
int DoPreDefault (
    UBYTE * s ) [extern]
```

Definition at line [4188](#) of file [pre.c](#).

4.19.6.234 DoPreSwitch()

```
int DoPreSwitch (
    UBYTE * s ) [extern]
```

Definition at line [4239](#) of file [pre.c](#).

4.19.6.235 DoPreEndSwitch()

```
int DoPreEndSwitch (
    UBYTE * s ) [extern]
```

Definition at line [4212](#) of file [pre.c](#).

4.19.6.236 DoPreCase()

```
int DoPreCase (
    UBYTE * s ) [extern]
```

Definition at line 4149 of file [pre.c](#).

4.19.6.237 DoPreShow()

```
int DoPreShow (
    UBYTE * s ) [extern]
```

Definition at line 4293 of file [pre.c](#).

4.19.6.238 DoPreExchange()

```
int DoPreExchange (
    UBYTE * s ) [extern]
```

Definition at line 2496 of file [pre.c](#).

4.19.6.239 DoSystem()

```
int DoSystem (
    UBYTE * s ) [extern]
```

Definition at line 4332 of file [pre.c](#).

4.19.6.240 DoPipe()

```
int DoPipe (
    UBYTE * s ) [extern]
```

Definition at line 3753 of file [pre.c](#).

4.19.6.241 StartPrepro()

```
void StartPrepro (
    void ) [extern]
```

Definition at line 4510 of file [pre.c](#).

4.19.6.242 Dolfdef()

```
int DoIfdef (
    UBYTE * s,
    int par ) [extern]
```

Definition at line 3454 of file [pre.c](#).

4.19.6.243 Dolfydef()

```
int DoIfydef (  
    UBYTE * s ) [extern]
```

Definition at line [3479](#) of file [pre.c](#).

4.19.6.244 Dolfndef()

```
int DoIfndef (  
    UBYTE * s ) [extern]
```

Definition at line [3489](#) of file [pre.c](#).

4.19.6.245 DoElse()

```
int DoElse (  
    UBYTE * s ) [extern]
```

Definition at line [3157](#) of file [pre.c](#).

4.19.6.246 DoElseif()

```
int DoElseif (  
    UBYTE * s ) [extern]
```

Definition at line [3194](#) of file [pre.c](#).

4.19.6.247 DoEndif()

```
int DoEndif (  
    UBYTE * s ) [extern]
```

Definition at line [3375](#) of file [pre.c](#).

4.19.6.248 DoTerminate()

```
int DoTerminate (  
    UBYTE * s ) [extern]
```

Definition at line [2766](#) of file [pre.c](#).

4.19.6.249 Dolf()

```
int DoIf (  
    UBYTE * s ) [extern]
```

Definition at line [3430](#) of file [pre.c](#).

4.19.6.250 DoCall()

```
int DoCall (
    UBYTE * s ) [extern]
```

Definition at line 2557 of file [pre.c](#).

4.19.6.251 DoDebug()

```
int DoDebug (
    UBYTE * s ) [extern]
```

Definition at line 2729 of file [pre.c](#).

4.19.6.252 DoContinueDo()

```
int DoContinueDo (
    UBYTE * s ) [extern]
```

Jumps forward to the corresponding `#enddo` of the specified number of outer `#do` loops.

Syntax:

```
#continuedo [<number>=1]
```

If `number` is omitted, it defaults to 1. If `number` is zero then the instruction has no effect.

Definition at line 2800 of file [pre.c](#).

4.19.6.253 DoDo()

```
int DoDo (
    UBYTE * s ) [extern]
```

Definition at line 2864 of file [pre.c](#).

4.19.6.254 DoBreakDo()

```
int DoBreakDo (
    UBYTE * s ) [extern]
```

Definition at line 3079 of file [pre.c](#).

4.19.6.255 DoEnddo()

```
int DoEnddo (
    UBYTE * s ) [extern]
```

Definition at line 3229 of file [pre.c](#).

4.19.6.256 DoEndprocedure()

```
int DoEndprocedure (
    UBYTE * s ) [extern]
```

Definition at line [3403](#) of file [pre.c](#).

4.19.6.257 DoInside()

```
int DoInside (
    UBYTE * s ) [extern]
```

Definition at line [3514](#) of file [pre.c](#).

4.19.6.258 DoEndInside()

```
int DoEndInside (
    UBYTE * s ) [extern]
```

Definition at line [3607](#) of file [pre.c](#).

4.19.6.259 DoProcedure()

```
int DoProcedure (
    UBYTE * s ) [extern]
```

Definition at line [4068](#) of file [pre.c](#).

4.19.6.260 DoPrePrintTimes()

```
int DoPrePrintTimes (
    UBYTE * s ) [extern]
```

Definition at line [3833](#) of file [pre.c](#).

4.19.6.261 DoPreWrite()

```
int DoPreWrite (
    UBYTE * s ) [extern]
```

Definition at line [4027](#) of file [pre.c](#).

4.19.6.262 DoPreClose()

```
int DoPreClose (
    UBYTE * s ) [extern]
```

Definition at line [3983](#) of file [pre.c](#).

4.19.6.263 DoPreRemove()

```
int DoPreRemove (
    UBYTE * s ) [extern]
```

Definition at line [3950](#) of file [pre.c](#).

4.19.6.264 DoPreSortReallocate()

```
int DoPreSortReallocate (
    UBYTE * s ) [extern]
```

Definition at line [3847](#) of file [pre.c](#).

4.19.6.265 DoCommentChar()

```
int DoCommentChar (
    UBYTE * s ) [extern]
```

Definition at line [2103](#) of file [pre.c](#).

4.19.6.266 DoPrcExtension()

```
int DoPrcExtension (
    UBYTE * s ) [extern]
```

Definition at line [3776](#) of file [pre.c](#).

4.19.6.267 DoPreReset()

```
int DoPreReset (
    UBYTE * s ) [extern]
```

Definition at line [7073](#) of file [pre.c](#).

4.19.6.268 WriteString()

```
void WriteString (
    int type,
    UBYTE * str,
    int num ) [extern]
```

Definition at line [1809](#) of file [tools.c](#).

4.19.6.269 WriteUnfinString()

```
void WriteUnfinString (
    int type,
    UBYTE * str,
    int num ) [extern]
```

Definition at line [1843](#) of file [tools.c](#).

4.19.6.270 AddToString()

```
UBYTE * AddToString (
    UBYTE * outstring,
    UBYTE * extrastring,
    int par ) [extern]
```

Definition at line [1868](#) of file [tools.c](#).

4.19.6.271 PreCalc()

```
UBYTE * PreCalc (
    void ) [extern]
```

Definition at line [5191](#) of file [pre.c](#).

4.19.6.272 PreEval()

```
UBYTE * PreEval (
    UBYTE * s,
    LONG * x ) [extern]
```

Definition at line [5269](#) of file [pre.c](#).

4.19.6.273 NumToStr()

```
void NumToStr (
    UBYTE * s,
    LONG x ) [extern]
```

Definition at line [1785](#) of file [tools.c](#).

4.19.6.274 PreCmp()

```
int PreCmp (
    int type,
    int val,
    UBYTE * t,
    int type2,
    int val2,
    UBYTE * t2,
    int cmpop ) [extern]
```

Definition at line [4702](#) of file [pre.c](#).

4.19.6.275 PreEq()

```
int PreEq (
    int type,
    int val,
    UBYTE * t,
    int type2,
    int val2,
    UBYTE * t2,
    int egop ) [extern]
```

Definition at line [4726](#) of file [pre.c](#).

4.19.6.276 pParseObject()

```
UBYTE * pParseObject (
    UBYTE * s,
    int * type,
    LONG * val2 ) [extern]
```

Definition at line [4755](#) of file [pre.c](#).

4.19.6.277 PreIfEval()

```
UBYTE * PreIfEval (
    UBYTE * s,
    int * value ) [extern]
```

Definition at line [4573](#) of file [pre.c](#).

4.19.6.278 EvalPreIf()

```
int EvalPreIf (
    UBYTE * s ) [extern]
```

Definition at line [4538](#) of file [pre.c](#).

4.19.6.279 PreLoad()

```
int PreLoad (
    PRELOAD * p,
    UBYTE * start,
    UBYTE * stop,
    int mode,
    char * message ) [extern]
```

Definition at line [4372](#) of file [pre.c](#).

4.19.6.280 PreSkip()

```
int PreSkip (
    UBYTE * start,
    UBYTE * stop,
    int mode ) [extern]
```

Definition at line [4455](#) of file [pre.c](#).

4.19.6.281 EndOfToken()

```
UBYTE * EndOfToken (
    UBYTE * s ) [extern]
```

Definition at line [1921](#) of file [tools.c](#).

4.19.6.282 SetSpecialMode()

```
void SetSpecialMode (
    int moduletype,
    int specialtype ) [extern]
```

Definition at line [257](#) of file [module.c](#).

4.19.6.283 MakeGlobal()

```
void MakeGlobal (
    void ) [extern]
```

Definition at line [383](#) of file [execute.c](#).

4.19.6.284 ExecModule()

```
int ExecModule (
    int moduletype ) [extern]
```

Definition at line [274](#) of file [module.c](#).

4.19.6.285 ExecStore()

```
int ExecStore (
    void ) [extern]
```

Definition at line [299](#) of file [module.c](#).

4.19.6.286 FullCleanUp()

```
void FullCleanUp (
    void ) [extern]
```

Definition at line 314 of file [module.c](#).

4.19.6.287 DoExecStatement()

```
int DoExecStatement (
    void ) [extern]
```

Definition at line 780 of file [module.c](#).

4.19.6.288 DoPipeStatement()

```
int DoPipeStatement (
    void ) [extern]
```

Definition at line 797 of file [module.c](#).

4.19.6.289 DoPolyfun()

```
int DoPolyfun (
    UBYTE * s ) [extern]
```

Definition at line 395 of file [module.c](#).

4.19.6.290 DoPolyratfun()

```
int DoPolyratfun (
    UBYTE * s ) [extern]
```

Definition at line 458 of file [module.c](#).

4.19.6.291 CompileStatement()

```
int CompileStatement (
    UBYTE * in ) [extern]
```

Definition at line 558 of file [compiler.c](#).

4.19.6.292 ToToken()

```
UBYTE * ToToken (
    UBYTE * s ) [extern]
```

Definition at line 1933 of file [tools.c](#).

4.19.6.293 GetDollar()

```
int GetDollar (
    UBYTE * name ) [extern]
```

Definition at line [590](#) of file [names.c](#).

4.19.6.294 MesWork()

```
int MesWork (
    void ) [extern]
```

Definition at line [89](#) of file [message.c](#).

4.19.6.295 MesCall()

```
int MesCall (
    char * s ) [extern]
```

Definition at line [814](#) of file [message.c](#).

4.19.6.296 NumCopy()

```
UBYTE * NumCopy (
    WORD y,
    UBYTE * to ) [extern]
```

Definition at line [1999](#) of file [tools.c](#).

4.19.6.297 LongCopy()

```
char * LongCopy (
    LONG y,
    char * to ) [extern]
```

Definition at line [2026](#) of file [tools.c](#).

4.19.6.298 LongLongCopy()

```
char * LongLongCopy (
    off_t * y,
    char * to ) [extern]
```

Definition at line [2053](#) of file [tools.c](#).

4.19.6.299 ReserveTempFiles()

```
void ReserveTempFiles (
    int par ) [extern]
```

Definition at line [666](#) of file [startup.c](#).

4.19.6.300 PrintTerm()

```
void PrintTerm (
    WORD * term,
    char * where ) [extern]
```

Definition at line [857](#) of file [message.c](#).

4.19.6.301 PrintTermC()

```
void PrintTermC (
    WORD * term,
    char * where ) [extern]
```

Definition at line [887](#) of file [message.c](#).

4.19.6.302 PrintSubTerm()

```
void PrintSubTerm (
    WORD * term,
    char * where ) [extern]
```

Definition at line [921](#) of file [message.c](#).

4.19.6.303 PrintWords()

```
void PrintWords (
    WORD * buffer,
    LONG number ) [extern]
```

Definition at line [943](#) of file [message.c](#).

4.19.6.304 PrintSeq()

```
void PrintSeq (
    WORD * a,
    char * text ) [extern]
```

Definition at line [961](#) of file [message.c](#).

4.19.6.305 ExpandTripleDots()

```
int ExpandTripleDots (
    int par ) [extern]
```

Definition at line 1601 of file [pre.c](#).

4.19.6.306 ComPress()

```
LONG ComPress (
    WORD ** ss,
    LONG * n ) [extern]
```

Gets a list of pointers to terms and compresses the terms. In *n* it collects the number of terms and the return value of the function is the space that is occupied.

We have to pay some special attention to the compression of terms with a PolyFun. This PolyFun should occur only straight before the coefficient, so we can use the same trick as for the coefficient to sabotage compression of this object (Replace in the history the function pointer by zero. This is safe, because terms that would be identical otherwise would have been added).

Parameters

<i>ss</i>	Array of pointers to terms to be compressed.
<i>n</i>	Number of pointers in <i>ss</i> .

Returns

Total number of words needed for the compressed result.

Definition at line 3206 of file [sort.c](#).

Referenced by [EndSort\(\)](#), and [StoreTerm\(\)](#).

4.19.6.307 StageSort()

```
void StageSort (
    FILEHANDLE * fout ) [extern]
```

Prepares a stage 4 or higher sort. Stage 4 sorts occur when the sort file contains more patches than can be merged in one pass.

Definition at line 4664 of file [sort.c](#).

References [FiLe::handle](#).

Referenced by [EndSort\(\)](#), and [MergePatches\(\)](#).

4.19.6.308 M_free()

```
void M_free (
    void * x,
    const char * where ) [extern]
```

Definition at line 2300 of file [tools.c](#).

4.19.6.309 ClearWildcardNames()

```
void ClearWildcardNames (
    void ) [extern]
```

Definition at line 849 of file [names.c](#).

4.19.6.310 AddWildcardName()

```
int AddWildcardName (
    UBYTE * name ) [extern]
```

Definition at line 854 of file [names.c](#).

4.19.6.311 GetWildcardName()

```
int GetWildcardName (
    UBYTE * name ) [extern]
```

Definition at line 898 of file [names.c](#).

4.19.6.312 Globalize()

```
void Globalize (
    int par ) [extern]
```

Definition at line 3159 of file [names.c](#).

4.19.6.313 ResetVariables()

```
void ResetVariables (
    int par ) [extern]
```

Definition at line 2836 of file [names.c](#).

4.19.6.314 AddToPreTypes()

```
void AddToPreTypes (
    int type ) [extern]
```

Definition at line 5419 of file [pre.c](#).

4.19.6.315 MessPreNesting()

```
void MessPreNesting (  
    int par ) [extern]
```

Definition at line 5437 of file [pre.c](#).

4.19.6.316 GetStreamPosition()

```
LONG GetStreamPosition (  
    STREAM * stream ) [extern]
```

Definition at line 815 of file [tools.c](#).

4.19.6.317 DoubleCbuffer()

```
WORD * DoubleCbuffer (  
    int num,  
    WORD * w,  
    int par ) [extern]
```

Doubles a compiler buffer.

Parameters

<i>num</i>	The ID number for the buffer to be doubled.
<i>w</i>	The pointer to the end (exclusive) of the current buffer. The contents in the range of [cbuff[num].Buffer,w) will be kept.

Definition at line 143 of file [comtool.c](#).

References [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::lhs](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Referenced by [AddNtoC\(\)](#), and [AddNtoL\(\)](#).

4.19.6.318 AddLHS()

```
WORD * AddLHS (  
    int num ) [extern]
```

Adds an LHS to a compiler buffer and returns the pointer to a buffer for the new LHS.

Parameters

<i>num</i>	The ID number for the buffer to get another LHS.
------------	--

Definition at line 188 of file [comtool.c](#).

References [CbUf::lhs](#), and [CbUf::Pointer](#).

Referenced by [AddNtoL\(\)](#).

4.19.6.319 AddRHS()

```
WORD * AddRHS (
    int num,
    int type ) [extern]
```

Adds an RHS to a compiler buffer and returns the pointer to a buffer for the new RHS.

Parameters

<i>num</i>	The ID number for the buffer to get another RHS.
<i>type</i>	If 0, the subexpression tree will be reallocated.

Definition at line 214 of file [comtool.c](#).

References [TaBIEs::buffers](#), [TaBIEs::buffersfill](#), [TaBIEs::bufferssize](#), [TaBIEs::bufnum](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [inicbufs\(\)](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [CbUf::Pointer](#), and [CbUf::rhs](#).

Referenced by [InsertArg\(\)](#), [StartVariables\(\)](#), and [TestMatch\(\)](#).

Here is the call graph for this function:



4.19.6.320 AddNtoL()

```
int AddNtoL (
    int n,
    WORD * array ) [extern]
```

Adds an LHS with the given data to the current compiler buffer.

Parameters

<i>n</i>	The length of the data.
<i>array</i>	The data to be added.


Returns

0 if succeeds.

Definition at line 288 of file [comtool.c](#).

References [AddLHS\(\)](#), [DoubleCbuffer\(\)](#), [CbUf::Pointer](#), and [CbUf::Top](#).

Here is the call graph for this function:

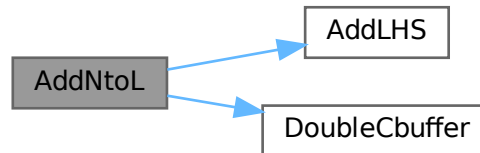

4.19.6.321 AddNtoC()

```

int AddNtoC (
    int bufnum,
    int n,
    WORD * array,
    int par ) [extern]
  
```

Adds the given data to the last LHS/RHS in a compiler buffer.

Parameters

<i>bufnum</i>	The ID number for the buffer where the data will be added.
<i>n</i>	The length of the data.
<i>array</i>	The data to be added.

Returns

0 if succeeds.

Definition at line 317 of file [comtool.c](#).

References [DoubleCbuffer\(\)](#), [CbUf::Pointer](#), and [CbUf::Top](#).

Referenced by [InsertArg\(\)](#), and [StartVariables\(\)](#).

Here is the call graph for this function:



4.19.6.322 DoubleIfBuffers()

```
void DoubleIfBuffers (
    void ) [extern]
```

Definition at line [1033](#) of file [if.c](#).

4.19.6.323 CreateStream()

```
STREAM * CreateStream (
    UBYTE * where ) [extern]
```

Definition at line [784](#) of file [tools.c](#).

4.19.6.324 setonoff()

```
int setonoff (
    UBYTE * s,
    int * flag,
    int onvalue,
    int offvalue ) [extern]
```

Definition at line [496](#) of file [compcomm.c](#).

4.19.6.325 DoPrint()

```
int DoPrint (
    UBYTE * s,
    int par ) [extern]
```

Definition at line [1047](#) of file [compcomm.c](#).

4.19.6.326 SetExpr()

```
int SetExpr (
    UBYTE * s,
    int setunset,
    int par ) [extern]
```

Definition at line [1518](#) of file [compcomm.c](#).

4.19.6.327 AddToCom()

```
void AddToCom (
    int n,
    WORD * array ) [extern]
```

Definition at line [1655](#) of file [compcomm.c](#).

4.19.6.328 Add2ComStrings()

```
int Add2ComStrings (
    int n,
    WORD * array,
    UBYTE * string1,
    UBYTE * string2 ) [extern]
```

Definition at line [1729](#) of file [compcomm.c](#).

4.19.6.329 DoSymmetrize()

```
int DoSymmetrize (
    UBYTE * s,
    int par ) [extern]
```

Definition at line [2240](#) of file [compcomm.c](#).

4.19.6.330 DoArgument()

```
int DoArgument (
    UBYTE * s,
    int par ) [extern]
```

Definition at line [1868](#) of file [compcomm.c](#).

4.19.6.331 ArgFactorize()

```
int ArgFactorize (
    PHEAD WORD * argin,
    WORD * argout ) [extern]
```

Definition at line [2066](#) of file [argument.c](#).

4.19.6.332 TakeArgContent()


```
WORD * TakeArgContent (
    PHEAD WORD * argin,
    WORD * argout ) [extern]
```

Implements part of the old ExecArg in which we take common factors from arguments with more than one term. The common pieces are put in argout as a sequence of arguments. The part with the multiple terms that are now relative prime is put in argfree which is allocated via TermMalloc and is given as the return value. The difference with the old code is that negative powers are always removed. Hence it is as in MakeInteger in which only numerators will be left: now only zero or positive powers will be remaining.

Definition at line [2772](#) of file [argument.c](#).

References [EndSort\(\)](#), [MakeInteger\(\)](#), [MakeMod\(\)](#), [NewSort\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

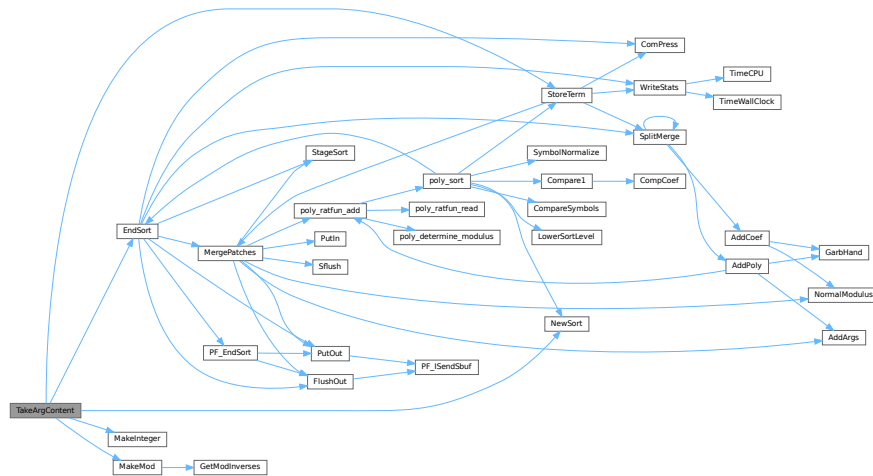

4.19.6.333 MakeInteger()

```
WORD * MakeInteger (
    PHEAD WORD * argin,
    WORD * argout,
    WORD * argfree ) [extern]
```

For normalizing everything to integers we have to determine for all elements of this argument the LCM of the denominators and the GCD of the numerators. The input argument is in argin. The number that comes out should go to argout. The new pointer in the argout buffer is the return value. The normalized argument is in argfree.

Definition at line 3318 of file [argument.c](#).

Referenced by [TakeArgContent\(\)](#).

4.19.6.334 MakeMod()

```
WORD * MakeMod (
    PHEAD WORD * argin,
    WORD * argout,
    WORD * argfree ) [extern]
```


Similar to MakeInteger but now with modulus arithmetic using only a one WORD 'prime'. We make the coefficient of the first term in the argument equal to one. Already the coefficients are taken modulus AN.cmod and AN.ncmod == 1

Definition at line 3489 of file [argument.c](#).

References [GetModInverses\(\)](#).

Referenced by [TakeArgContent\(\)](#).

Here is the call graph for this function:



4.19.6.335 FindArg()

```
WORD FindArg (
    PHEAD WORD * a ) [extern]
```

Looks the argument up in the (workers) table. If it is found the number in the table is returned (plus one to make it positive). If it is not found we look in the compiler provided table. If it is found - the number in the table is returned (minus one to make it negative). If in neither table we return zero.

Definition at line 2519 of file [argument.c](#).

4.19.6.336 InsertArg()


```
int InsertArg (
    PHEAD WORD * argin,
    WORD * argout,
    int par ) [extern]
```

Inserts the argument into the (workers) table. If the table is too full we eliminate half of it. The eliminated elements are the ones that have not been used most recently, weighted by their total use and age(?). If par == 0 it inserts in the regular factorization cache If par == 1 it inserts in the cache defined with the FactorCache statement

Definition at line 2543 of file [argument.c](#).

References [AddNtoC\(\)](#), [AddRHS\(\)](#), and [CleanupArgCache\(\)](#).

Here is the call graph for this function:

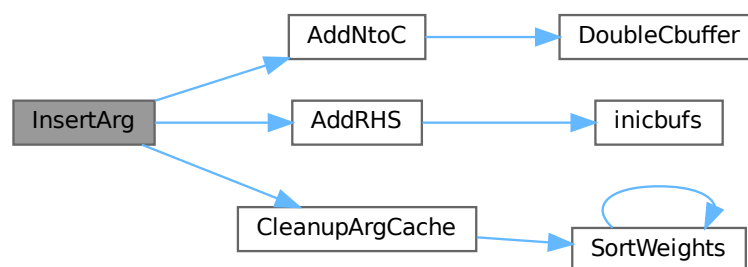

4.19.6.337 CleanupArgCache()

```
int CleanupArgCache (
    PHEAD WORD bufnum ) [extern]
```


Cleans up the argument factorization cache. We throw half the elements. For a weight of what we want to keep we use the product of usage and the number in the buffer.

Definition at line 2578 of file [argument.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::Pointer](#), [CbUf::rhs](#), [SortWeights\(\)](#), and [tree::usage](#).

Referenced by [InsertArg\(\)](#).

Here is the call graph for this function:



4.19.6.338 ArgSymbolMerge()

```
int ArgSymbolMerge (
    WORD * t1,
    WORD * t2 ) [extern]
```

Definition at line 2649 of file [argument.c](#).

4.19.6.339 ArgDotproductMerge()

```
int ArgDotproductMerge (
    WORD * t1,
    WORD * t2 ) [extern]
```

Definition at line 2704 of file [argument.c](#).

4.19.6.340 SortWeights()

```
void SortWeights (
    LONG * weights,
    LONG * extraspace,
    WORD number ) [extern]
```

Sorts an array of LONGS in the same way SplitMerge (in [sort.c](#)) works We use gradual division in two.

Definition at line [3534](#) of file [argument.c](#).

References [SortWeights\(\)](#).

Referenced by [CleanupArgCache\(\)](#), and [SortWeights\(\)](#).

Here is the call graph for this function:



4.19.6.341 DoBrackets()

```
int DoBrackets (
    UBYTE * inp,
    int par ) [extern]
```

Definition at line [3775](#) of file [compcomm.c](#).

4.19.6.342 DoPutInside()

```
int DoPutInside (
    UBYTE * inp,
    int par ) [extern]
```

Definition at line [7068](#) of file [compcomm.c](#).

4.19.6.343 CountComp()

```
WORD * CountComp (
    UBYTE * inp,
    WORD * to ) [extern]
```

Definition at line [4053](#) of file [compcomm.c](#).

4.19.6.344 CoAntiBracket()

```
int CoAntiBracket (
    UBYTE * inp ) [extern]
```

Definition at line 3910 of file [compcomm.c](#).

4.19.6.345 CoAntiSymmetrize()

```
int CoAntiSymmetrize (
    UBYTE * s ) [extern]
```

Definition at line 2367 of file [compcomm.c](#).

4.19.6.346 DoArgPlode()

```
int DoArgPlode (
    UBYTE * s,
    int par ) [extern]
```

Definition at line 5728 of file [compcomm.c](#).

4.19.6.347 CoArgExplode()

```
int CoArgExplode (
    UBYTE * s ) [extern]
```

Definition at line 5784 of file [compcomm.c](#).

4.19.6.348 CoArgImplode()

```
int CoArgImplode (
    UBYTE * s ) [extern]
```

Definition at line 5791 of file [compcomm.c](#).

4.19.6.349 CoArgument()

```
int CoArgument (
    UBYTE * s ) [extern]
```

Definition at line 2119 of file [compcomm.c](#).

4.19.6.350 CoInside()

```
int CoInside (
    UBYTE * s ) [extern]
```

Definition at line 2152 of file [compcomm.c](#).

4.19.6.351 ExecInside()

```
int ExecInside (
    UBYTE * s ) [extern]
```

Definition at line 1681 of file [dollar.c](#).

4.19.6.352 CoInExpression()

```
int CoInExpression (
    UBYTE * s ) [extern]
```

Definition at line 3380 of file [compcomm.c](#).

4.19.6.353 CoInParallel()

```
int CoInParallel (
    UBYTE * s ) [extern]
```

Definition at line 3286 of file [compcomm.c](#).

4.19.6.354 CoNotInParallel()

```
int CoNotInParallel (
    UBYTE * s ) [extern]
```

Definition at line 3296 of file [compcomm.c](#).

4.19.6.355 DoInParallel()

```
int DoInParallel (
    UBYTE * s,
    int par ) [extern]
```

Definition at line 3311 of file [compcomm.c](#).

4.19.6.356 CoEndInExpression()

```
int CoEndInExpression (
    UBYTE * s ) [extern]
```

Definition at line 3433 of file [compcomm.c](#).

4.19.6.357 CoBracket()

```
int CoBracket (
    UBYTE * inp ) [extern]
```

Definition at line 3902 of file [compcomm.c](#).

4.19.6.358 CoPutInside()

```
int CoPutInside (
    UBYTE * inp ) [extern]
```

Definition at line 7065 of file [compcomm.c](#).

4.19.6.359 CoAntiPutInside()

```
int CoAntiPutInside (
    UBYTE * inp ) [extern]
```

Definition at line 7066 of file [compcomm.c](#).

4.19.6.360 CoMultiBracket()

```
int CoMultiBracket (
    UBYTE * inp ) [extern]
```

Definition at line 3921 of file [compcomm.c](#).

4.19.6.361 CoCFunction()

```
int CoCFunction (
    UBYTE * s ) [extern]
```

Definition at line 1629 of file [names.c](#).

4.19.6.362 CoCTensor()

```
int CoCTensor (
    UBYTE * s ) [extern]
```

Definition at line 1631 of file [names.c](#).

4.19.6.363 CoCollect()

```
int CoCollect (
    UBYTE * s ) [extern]
```

Definition at line 434 of file [compcomm.c](#).

4.19.6.364 CoCompress()

```
int CoCompress (
    UBYTE * s ) [extern]
```

Definition at line 512 of file [compcomm.c](#).

4.19.6.365 CoContract()

```
int CoContract (
    UBYTE * s ) [extern]
```

Definition at line 1793 of file [compcomm.c](#).

4.19.6.366 CoCycleSymmetrize()

```
int CoCycleSymmetrize (
    UBYTE * s ) [extern]
```

Definition at line 2374 of file [compcomm.c](#).

4.19.6.367 CoDelete()

```
int CoDelete (
    UBYTE * s ) [extern]
```

Definition at line 948 of file [compcomm.c](#).

4.19.6.368 CoTableBase()

```
int CoTableBase (
    UBYTE * s ) [extern]
```

Definition at line 627 of file [tables.c](#).

4.19.6.369 CoApply()

```
int CoApply (
    UBYTE * s ) [extern]
```

Definition at line 1797 of file [tables.c](#).

4.19.6.370 CoDenominators()

```
int CoDenominators (
    UBYTE * s ) [extern]
```

Definition at line 5880 of file [compcomm.c](#).

4.19.6.371 CoDimension()

```
int CoDimension (
    UBYTE * s ) [extern]
```

Definition at line 1226 of file [names.c](#).

4.19.6.372 CoDiscard()

```
int CoDiscard (
    UBYTE * s ) [extern]
```

Definition at line 1770 of file [compcomm.c](#).

4.19.6.373 CoDisorder()

```
int CoDisorder (
    UBYTE * inp ) [extern]
```

Definition at line 417 of file [comexpr.c](#).

4.19.6.374 CoDrop()

```
int CoDrop (
    UBYTE * s ) [extern]
```

Definition at line 1563 of file [compcomm.c](#).

4.19.6.375 CoDropCoefficient()

```
int CoDropCoefficient (
    UBYTE * s ) [extern]
```

Definition at line 5909 of file [compcomm.c](#).

4.19.6.376 CoDropSymbols()

```
int CoDropSymbols (
    UBYTE * s ) [extern]
```

Definition at line 5923 of file [compcomm.c](#).

4.19.6.377 CoElse()

```
int CoElse (
    UBYTE * p ) [extern]
```

Definition at line 4883 of file [compcomm.c](#).

4.19.6.378 CoElseIf()

```
int CoElseIf (
    UBYTE * inp ) [extern]
```

Definition at line 4910 of file [compcomm.c](#).

4.19.6.379 CoEndArgument()

```
int CoEndArgument (
    UBYTE * s ) [extern]
```

Definition at line [2126](#) of file [compcomm.c](#).

4.19.6.380 CoEndInside()

```
int CoEndInside (
    UBYTE * s ) [extern]
```

Definition at line [2159](#) of file [compcomm.c](#).

4.19.6.381 CoEndIf()

```
int CoEndIf (
    UBYTE * inp ) [extern]
```

Definition at line [4937](#) of file [compcomm.c](#).

4.19.6.382 CoEndRepeat()

```
int CoEndRepeat (
    UBYTE * inp ) [extern]
```

Definition at line [3737](#) of file [compcomm.c](#).

4.19.6.383 CoEndTerm()

```
int CoEndTerm (
    UBYTE * s ) [extern]
```

Definition at line [5286](#) of file [compcomm.c](#).

4.19.6.384 CoEndWhile()

```
int CoEndWhile (
    UBYTE * inp ) [extern]
```

Definition at line [5003](#) of file [compcomm.c](#).

4.19.6.385 CoExit()

```
int CoExit (
    UBYTE * s ) [extern]
```

Definition at line [3259](#) of file [compcomm.c](#).

4.19.6.386 CoFactArg()

```
int CoFactArg (  
    UBYTE * s ) [extern]
```

Definition at line 2220 of file [compcomm.c](#).

4.19.6.387 CoFactDollar()

```
int CoFactDollar (  
    UBYTE * inp ) [extern]
```

Definition at line 6439 of file [compcomm.c](#).

4.19.6.388 CoFactorize()

```
int CoFactorize (  
    UBYTE * s ) [extern]
```

Definition at line 6468 of file [compcomm.c](#).

4.19.6.389 CoNFactorize()

```
int CoNFactorize (  
    UBYTE * s ) [extern]
```

Definition at line 6475 of file [compcomm.c](#).

4.19.6.390 CoUnFactorize()

```
int CoUnFactorize (  
    UBYTE * s ) [extern]
```

Definition at line 6482 of file [compcomm.c](#).

4.19.6.391 CoNUnFactorize()

```
int CoNUnFactorize (  
    UBYTE * s ) [extern]
```

Definition at line 6489 of file [compcomm.c](#).

4.19.6.392 DoFactorize()

```
int DoFactorize (  
    UBYTE * s,  
    int par ) [extern]
```

Definition at line 6496 of file [compcomm.c](#).

4.19.6.393 CoFill()

```
int CoFill (
    UBYTE * inp ) [extern]
```

Definition at line [1070](#) of file [comexpr.c](#).

4.19.6.394 CoFillExpression()

```
int CoFillExpression (
    UBYTE * inp ) [extern]
```

Definition at line [1356](#) of file [comexpr.c](#).

4.19.6.395 CoFixIndex()

```
int CoFixIndex (
    UBYTE * s ) [extern]
```

Definition at line [1005](#) of file [compcomm.c](#).

4.19.6.396 CoFormat()

```
int CoFormat (
    UBYTE * s ) [extern]
```

Definition at line [154](#) of file [compcomm.c](#).

4.19.6.397 CoGlobal()

```
int CoGlobal (
    UBYTE * inp ) [extern]
```

Definition at line [73](#) of file [comexpr.c](#).

4.19.6.398 CoGlobalFactorized()

```
int CoGlobalFactorized (
    UBYTE * inp ) [extern]
```

Definition at line [87](#) of file [comexpr.c](#).

4.19.6.399 CoGoTo()

```
int CoGoTo (
    UBYTE * inp ) [extern]
```

Definition at line [1822](#) of file [compcomm.c](#).

4.19.6.400 Cold()

```
int CoId (
    UBYTE * inp ) [extern]
```

Definition at line 395 of file [comexpr.c](#).

4.19.6.401 ColdNew()

```
int CoIdNew (
    UBYTE * inp ) [extern]
```

Definition at line 406 of file [comexpr.c](#).

4.19.6.402 ColdOld()

```
int CoIdOld (
    UBYTE * inp ) [extern]
```

Definition at line 384 of file [comexpr.c](#).

4.19.6.403 Colf()

```
int CoIf (
    UBYTE * inp ) [extern]
```

Definition at line 4243 of file [compcomm.c](#).

4.19.6.404 ColfMatch()

```
int CoIfMatch (
    UBYTE * inp ) [extern]
```

Definition at line 450 of file [comexpr.c](#).

4.19.6.405 ColfNoMatch()

```
int CoIfNoMatch (
    UBYTE * inp ) [extern]
```

Definition at line 461 of file [comexpr.c](#).

4.19.6.406 CoIndex()

```
int CoIndex (
    UBYTE * s ) [extern]
```

Definition at line 1112 of file [names.c](#).

4.19.6.407 CoInsideFirst()

```
int CoInsideFirst (
    UBYTE * s ) [extern]
```

Definition at line 934 of file [compcomm.c](#).

4.19.6.408 CoKeep()

```
int CoKeep (
    UBYTE * s ) [extern]
```

Definition at line 993 of file [compcomm.c](#).

4.19.6.409 CoLabel()

```
int CoLabel (
    UBYTE * inp ) [extern]
```

Definition at line 1841 of file [compcomm.c](#).

4.19.6.410 CoLoad()

```
int CoLoad (
    UBYTE * inp ) [extern]
```

Definition at line 572 of file [store.c](#).

4.19.6.411 CoLocal()

```
int CoLocal (
    UBYTE * inp ) [extern]
```

Definition at line 66 of file [comexpr.c](#).

4.19.6.412 CoLocalFactorized()

```
int CoLocalFactorized (
    UBYTE * inp ) [extern]
```

Definition at line 80 of file [comexpr.c](#).

4.19.6.413 CoMany()

```
int CoMany (
    UBYTE * inp ) [extern]
```

Definition at line 428 of file [comexpr.c](#).

4.19.6.414 CoMerge()

```
int CoMerge (
    UBYTE * inp ) [extern]
```

Definition at line [5569](#) of file [compcomm.c](#).

4.19.6.415 CoStuffle()

```
int CoStuffle (
    UBYTE * inp ) [extern]
```

Definition at line [5625](#) of file [compcomm.c](#).

4.19.6.416 CoMetric()

```
int CoMetric (
    UBYTE * s ) [extern]
```

Definition at line [1039](#) of file [compcomm.c](#).

4.19.6.417 CoModOption()

```
int CoModOption (
    UBYTE * s ) [extern]
```

Definition at line [212](#) of file [module.c](#).

4.19.6.418 CoModuleOption()

```
int CoModuleOption (
    UBYTE * s ) [extern]
```

Definition at line [143](#) of file [module.c](#).

4.19.6.419 CoModulus()

```
int CoModulus (
    UBYTE * inp ) [extern]
```

Definition at line [3576](#) of file [compcomm.c](#).

4.19.6.420 CoMulti()

```
int CoMulti (
    UBYTE * inp ) [extern]
```

Definition at line [439](#) of file [comexpr.c](#).

4.19.6.421 CoMultiply()

```
int CoMultiply (
    UBYTE * inp ) [extern]
```

Definition at line [1031](#) of file [comexpr.c](#).

4.19.6.422 CoNFunction()

```
int CoNFunction (
    UBYTE * s ) [extern]
```

Definition at line [1628](#) of file [names.c](#).

4.19.6.423 CoNPrint()

```
int CoNPrint (
    UBYTE * s ) [extern]
```

Definition at line [1277](#) of file [compcomm.c](#).

4.19.6.424 CoNTensor()

```
int CoNTensor (
    UBYTE * s ) [extern]
```

Definition at line [1630](#) of file [names.c](#).

4.19.6.425 CoNWrite()

```
int CoNWrite (
    UBYTE * s ) [extern]
```

Definition at line [2413](#) of file [compcomm.c](#).

4.19.6.426 CoNoDrop()

```
int CoNoDrop (
    UBYTE * s ) [extern]
```

Definition at line [1570](#) of file [compcomm.c](#).

4.19.6.427 CoNoSkip()

```
int CoNoSkip (
    UBYTE * s ) [extern]
```

Definition at line [1584](#) of file [compcomm.c](#).

4.19.6.428 CoNormalize()

```
int CoNormalize (
    UBYTE * s ) [extern]
```

Definition at line 2185 of file [compcomm.c](#).

4.19.6.429 CoMakeInteger()

```
int CoMakeInteger (
    UBYTE * s ) [extern]
```

Definition at line 2192 of file [compcomm.c](#).

4.19.6.430 CoFlags()

```
int CoFlags (
    UBYTE * s,
    int value ) [extern]
```

Definition at line 561 of file [compcomm.c](#).

4.19.6.431 CoOff()

```
int CoOff (
    UBYTE * s ) [extern]
```

Definition at line 596 of file [compcomm.c](#).

4.19.6.432 CoOn()

```
int CoOn (
    UBYTE * s ) [extern]
```

Definition at line 662 of file [compcomm.c](#).

4.19.6.433 CoOnce()

```
int CoOnce (
    UBYTE * inp ) [extern]
```

Definition at line 472 of file [comexpr.c](#).

4.19.6.434 CoOnly()

```
int CoOnly (
    UBYTE * inp ) [extern]
```

Definition at line 483 of file [comexpr.c](#).

4.19.6.435 CoOptimizeOption()

```
int CoOptimizeOption (  
    UBYTE * s ) [extern]
```

Definition at line 6629 of file [compcomm.c](#).

4.19.6.436 CoPolyFun()

```
int CoPolyFun (  
    UBYTE * s ) [extern]
```

Definition at line 5352 of file [compcomm.c](#).

4.19.6.437 CoPolyRatFun()

```
int CoPolyRatFun (  
    UBYTE * s ) [extern]
```

Definition at line 5399 of file [compcomm.c](#).

4.19.6.438 CoPrint()

```
int CoPrint (  
    UBYTE * s ) [extern]
```

Definition at line 1263 of file [compcomm.c](#).

4.19.6.439 CoPrintB()

```
int CoPrintB (  
    UBYTE * s ) [extern]
```

Definition at line 1270 of file [compcomm.c](#).

4.19.6.440 CoProperCount()

```
int CoProperCount (  
    UBYTE * s ) [extern]
```

Definition at line 941 of file [compcomm.c](#).

4.19.6.441 CoUnitTrace()

```
int CoUnitTrace (  
    UBYTE * s ) [extern]
```

Definition at line 5203 of file [compcomm.c](#).

4.19.6.442 CoRCycleSymmetrize()

```
int CoRCycleSymmetrize (
    UBYTE * s ) [extern]
```

Definition at line [2381](#) of file [compcomm.c](#).

4.19.6.443 CoRatio()

```
int CoRatio (
    UBYTE * s ) [extern]
```

Definition at line [2440](#) of file [compcomm.c](#).

4.19.6.444 CoRedefine()

```
int CoRedefine (
    UBYTE * s ) [extern]
```

Definition at line [2480](#) of file [compcomm.c](#).

4.19.6.445 CoRenumber()

```
int CoRenumber (
    UBYTE * s ) [extern]
```

Definition at line [2585](#) of file [compcomm.c](#).

4.19.6.446 CoRepeat()

```
int CoRepeat (
    UBYTE * inp ) [extern]
```

Definition at line [3714](#) of file [compcomm.c](#).

4.19.6.447 CoSave()

```
int CoSave (
    UBYTE * inp ) [extern]
```

Definition at line [362](#) of file [store.c](#).

4.19.6.448 CoSelect()

```
int CoSelect (
    UBYTE * inp ) [extern]
```

Definition at line [494](#) of file [comexpr.c](#).

4.19.6.449 CoSet()

```
int CoSet (
    UBYTE * s ) [extern]
```

Definition at line [2359](#) of file [names.c](#).

4.19.6.450 CoSetExitFlag()

```
int CoSetExitFlag (
    UBYTE * s ) [extern]
```

Definition at line [3459](#) of file [compcomm.c](#).

4.19.6.451 CoSkip()

```
int CoSkip (
    UBYTE * s ) [extern]
```

Definition at line [1577](#) of file [compcomm.c](#).

4.19.6.452 CoProcessBucket()

```
int CoProcessBucket (
    UBYTE * s ) [extern]
```

Definition at line [5680](#) of file [compcomm.c](#).

4.19.6.453 CoPushHide()

```
int CoPushHide (
    UBYTE * s ) [extern]
```

Definition at line [1284](#) of file [compcomm.c](#).

4.19.6.454 CoPopHide()

```
int CoPopHide (
    UBYTE * s ) [extern]
```

Definition at line [1328](#) of file [compcomm.c](#).

4.19.6.455 CoHide()

```
int CoHide (
    UBYTE * inp ) [extern]
```

Definition at line [1591](#) of file [compcomm.c](#).

4.19.6.456 CoIntoHide()

```
int CoIntoHide (
    UBYTE * inp ) [extern]
```

Definition at line 1609 of file [compcomm.c](#).

4.19.6.457 CoNoIntoHide()

```
int CoNoIntoHide (
    UBYTE * inp ) [extern]
```

Definition at line 1627 of file [compcomm.c](#).

4.19.6.458 CoNoHide()

```
int CoNoHide (
    UBYTE * inp ) [extern]
```

Definition at line 1634 of file [compcomm.c](#).

4.19.6.459 CoUnHide()

```
int CoUnHide (
    UBYTE * inp ) [extern]
```

Definition at line 1641 of file [compcomm.c](#).

4.19.6.460 CoNoUnHide()

```
int CoNoUnHide (
    UBYTE * inp ) [extern]
```

Definition at line 1648 of file [compcomm.c](#).

4.19.6.461 CoSort()

```
int CoSort (
    UBYTE * s ) [extern]
```

Definition at line 5313 of file [compcomm.c](#).

4.19.6.462 CoSplitArg()

```
int CoSplitArg (
    UBYTE * s ) [extern]
```

Definition at line 2199 of file [compcomm.c](#).

4.19.6.463 CoSplitFirstArg()

```
int CoSplitFirstArg (  
    UBYTE * s ) [extern]
```

Definition at line [2206](#) of file [compcomm.c](#).

4.19.6.464 CoSplitLastArg()

```
int CoSplitLastArg (  
    UBYTE * s ) [extern]
```

Definition at line [2213](#) of file [compcomm.c](#).

4.19.6.465 CoSum()

```
int CoSum (  
    UBYTE * s ) [extern]
```

Definition at line [2606](#) of file [compcomm.c](#).

4.19.6.466 CoSymbol()

```
int CoSymbol (  
    UBYTE * s ) [extern]
```

Definition at line [946](#) of file [names.c](#).

4.19.6.467 CoSymmetrize()

```
int CoSymmetrize (  
    UBYTE * s ) [extern]
```

Definition at line [2360](#) of file [compcomm.c](#).

4.19.6.468 DoTable()

```
int DoTable (  
    UBYTE * s,  
    int par ) [extern]
```

Definition at line [1670](#) of file [names.c](#).

4.19.6.469 CoTable()

```
int CoTable (  
    UBYTE * s ) [extern]
```

Definition at line [2052](#) of file [names.c](#).

4.19.6.470 CoTerm()

```
int CoTerm (
    UBYTE * s ) [extern]
```

Definition at line 5238 of file [compcomm.c](#).

4.19.6.471 CoNTable()

```
int CoNTable (
    UBYTE * s ) [extern]
```

Definition at line 2062 of file [names.c](#).

4.19.6.472 CoCTable()

```
int CoCTable (
    UBYTE * s ) [extern]
```

Definition at line 2072 of file [names.c](#).

4.19.6.473 EmptyTable()

```
void EmptyTable (
    TABLES T ) [extern]
```

Definition at line 2082 of file [names.c](#).

4.19.6.474 CoToTensor()

```
int CoToTensor (
    UBYTE * s ) [extern]
```

Definition at line 2726 of file [compcomm.c](#).

4.19.6.475 CoToVector()

```
int CoToVector (
    UBYTE * s ) [extern]
```

Definition at line 2894 of file [compcomm.c](#).

4.19.6.476 CoTrace4()

```
int CoTrace4 (
    UBYTE * s ) [extern]
```

Definition at line 2964 of file [compcomm.c](#).

4.19.6.477 CoTraceN()

```
int CoTraceN (  
    UBYTE * s ) [extern]
```

Definition at line [3051](#) of file [compcomm.c](#).

4.19.6.478 CoChisholm()

```
int CoChisholm (  
    UBYTE * s ) [extern]
```

Definition at line [3111](#) of file [compcomm.c](#).

4.19.6.479 CoTransform()

```
int CoTransform (  
    UBYTE * in ) [extern]
```

Definition at line [87](#) of file [transform.c](#).

4.19.6.480 CoClearTable()

```
int CoClearTable (  
    UBYTE * s ) [extern]
```

Definition at line [5798](#) of file [compcomm.c](#).

4.19.6.481 DoChain()

```
int DoChain (  
    UBYTE * s,  
    int option ) [extern]
```

Definition at line [3193](#) of file [compcomm.c](#).

4.19.6.482 CoChainin()

```
int CoChainin (  
    UBYTE * s ) [extern]
```

Definition at line [3237](#) of file [compcomm.c](#).

4.19.6.483 CoChainout()

```
int CoChainout (  
    UBYTE * s ) [extern]
```

Definition at line [3249](#) of file [compcomm.c](#).

4.19.6.484 CoTryReplace()

```
int CoTryReplace (
    UBYTE * p ) [extern]
```

Definition at line [3473](#) of file [compcomm.c](#).

4.19.6.485 CoVector()

```
int CoVector (
    UBYTE * s ) [extern]
```

Definition at line [1267](#) of file [names.c](#).

4.19.6.486 CoWhile()

```
int CoWhile (
    UBYTE * inp ) [extern]
```

Definition at line [4982](#) of file [compcomm.c](#).

4.19.6.487 CoWrite()

```
int CoWrite (
    UBYTE * s ) [extern]
```

Definition at line [2388](#) of file [compcomm.c](#).

4.19.6.488 CoAuto()

```
int CoAuto (
    UBYTE * inp ) [extern]
```

Definition at line [2576](#) of file [names.c](#).

4.19.6.489 CoSwitch()

```
int CoSwitch (
    UBYTE * s ) [extern]
```

Definition at line [7188](#) of file [compcomm.c](#).

4.19.6.490 CoCase()

```
int CoCase (
    UBYTE * s ) [extern]
```

Definition at line [7234](#) of file [compcomm.c](#).

4.19.6.491 CoBreak()

```
int CoBreak (
    UBYTE * s ) [extern]
```

Definition at line [7284](#) of file [compcomm.c](#).

4.19.6.492 CoDefault()

```
int CoDefault (
    UBYTE * s ) [extern]
```

Definition at line [7310](#) of file [compcomm.c](#).

4.19.6.493 CoEndSwitch()

```
int CoEndSwitch (
    UBYTE * s ) [extern]
```

Definition at line [7337](#) of file [compcomm.c](#).

4.19.6.494 CoTBaddto()

```
int CoTBaddto (
    UBYTE * s ) [extern]
```

Definition at line [801](#) of file [tables.c](#).

4.19.6.495 CoTBaudit()

```
int CoTBaudit (
    UBYTE * s ) [extern]
```

Definition at line [1474](#) of file [tables.c](#).

4.19.6.496 CoTBCleanup()

```
int CoTBCleanup (
    UBYTE * s ) [extern]
```

Definition at line [1576](#) of file [tables.c](#).

4.19.6.497 CoTBcreate()

```
int CoTBcreate (
    UBYTE * s ) [extern]
```

Definition at line [756](#) of file [tables.c](#).

4.19.6.498 CoTBenter()

```
int CoTBenter (
    UBYTE * s ) [extern]
```

Definition at line 974 of file [tables.c](#).

4.19.6.499 CoTBhelp()

```
int CoTBhelp (
    UBYTE * s ) [extern]
```

Definition at line 1884 of file [tables.c](#).

4.19.6.500 CoTBload()

```
int CoTBload (
    UBYTE * ss ) [extern]
```

Definition at line 1252 of file [tables.c](#).

4.19.6.501 CoTBoff()

```
int CoTBoff (
    UBYTE * s ) [extern]
```

Definition at line 1545 of file [tables.c](#).

4.19.6.502 CoTBon()

```
int CoTBon (
    UBYTE * s ) [extern]
```

Definition at line 1514 of file [tables.c](#).

4.19.6.503 CoTBopen()

```
int CoTBopen (
    UBYTE * s ) [extern]
```

Definition at line 772 of file [tables.c](#).

4.19.6.504 CoTBreplace()

```
int CoTBreplace (
    UBYTE * s ) [extern]
```

Definition at line 1588 of file [tables.c](#).

4.19.6.505 CoTBuse()

```
int CoTBuse (
    UBYTE * s ) [extern]
```

Definition at line 1603 of file [tables.c](#).

4.19.6.506 CoTestUse()

```
int CoTestUse (
    UBYTE * s ) [extern]
```

Definition at line 1133 of file [tables.c](#).

4.19.6.507 CoThreadBucket()

```
int CoThreadBucket (
    UBYTE * s ) [extern]
```

Definition at line 5698 of file [compcomm.c](#).

4.19.6.508 AddComString()

```
int AddComString (
    int n,
    WORD * array,
    UBYTE * thestring,
    int par ) [extern]
```

Definition at line 1670 of file [compcomm.c](#).

4.19.6.509 CompileAlgebra()

```
int CompileAlgebra (
    UBYTE * s,
    int leftright,
    WORD * prototype ) [extern]
```

Definition at line 522 of file [compiler.c](#).

4.19.6.510 IsIdStatement()

```
int IsIdStatement (
    UBYTE * s ) [extern]
```

Definition at line 508 of file [compiler.c](#).

4.19.6.511 IsRHS()

```
UBYTE * IsRHS (
    UBYTE * s,
    UBYTE c ) [extern]
```

Definition at line 462 of file [compiler.c](#).

4.19.6.512 ParenthesesTest()

```
int ParenthesesTest (
    UBYTE * sin ) [extern]
```

Definition at line 384 of file [compiler.c](#).

4.19.6.513 tokenize()

```
int tokenize (
    UBYTE * in,
    WORD leftright ) [extern]
```

Definition at line 58 of file [token.c](#).

4.19.6.514 WriteTokens()

```
void WriteTokens (
    SBYTE * in ) [extern]
```

Definition at line 652 of file [token.c](#).

4.19.6.515 simp1token()

```
int simp1token (
    SBYTE * s ) [extern]
```

Definition at line 700 of file [token.c](#).

4.19.6.516 simpwtoken()

```
int simpwtoken (
    SBYTE * s ) [extern]
```

Definition at line 789 of file [token.c](#).

4.19.6.517 simp2token()

```
int simp2token (
    SBYTE * s ) [extern]
```

Definition at line 943 of file [token.c](#).

4.19.6.518 simp3atoken()

```
int simp3atoken (
    SBYTE * s,
    int mode ) [extern]
```

Definition at line [1191](#) of file [token.c](#).

4.19.6.519 simp3btoken()

```
int simp3btoken (
    SBYTE * s,
    int mode ) [extern]
```

Definition at line [1432](#) of file [token.c](#).

4.19.6.520 simp4token()

```
int simp4token (
    SBYTE * s ) [extern]
```

Definition at line [1843](#) of file [token.c](#).

4.19.6.521 simp5token()

```
int simp5token (
    SBYTE * s,
    int mode ) [extern]
```

Definition at line [2003](#) of file [token.c](#).

4.19.6.522 simp6token()

```
int simp6token (
    SBYTE * tokens,
    int mode ) [extern]
```

Definition at line [2049](#) of file [token.c](#).

4.19.6.523 SkipAName()

```
UBYTE * SkipAName (
    UBYTE * s ) [extern]
```

Definition at line [434](#) of file [compiler.c](#).

4.19.6.524 TestTables()

```
int TestTables (
    void ) [extern]
```

Definition at line 673 of file [compiler.c](#).

4.19.6.525 GetLabel()

```
int GetLabel (
    UBYTE * name ) [extern]
```

Definition at line 2791 of file [names.c](#).

4.19.6.526 ColdExpression()

```
int CoIdExpression (
    UBYTE * inp,
    int type ) [extern]
```

Definition at line 507 of file [comexpr.c](#).

4.19.6.527 CoAssign()

```
int CoAssign (
    UBYTE * inp ) [extern]
```

Definition at line 1924 of file [comexpr.c](#).

4.19.6.528 DoExpr()

```
int DoExpr (
    UBYTE * inp,
    int type,
    int par ) [extern]
```

Definition at line 96 of file [comexpr.c](#).

4.19.6.529 CompileSubExpressions()

```
int CompileSubExpressions (
    SBYTE * tokens ) [extern]
```

Definition at line 717 of file [compiler.c](#).

4.19.6.530 CodeGenerator()

```
int CodeGenerator (
    SBYTE * tokens ) [extern]
```

Definition at line 852 of file [compiler.c](#).

4.19.6.531 CompleteTerm()

```
int CompleteTerm (
    WORD * term,
    UWORD * numer,
    UWORD * denom,
    WORD nnum,
    WORD nden,
    int sign ) [extern]
```

Definition at line 1915 of file [compiler.c](#).

4.19.6.532 CodeFactors()

```
int CodeFactors (
    SBYTE * s ) [extern]
```

Definition at line 1952 of file [compiler.c](#).

4.19.6.533 GenerateFactors()

```
WORD GenerateFactors (
    WORD n,
    WORD inc ) [extern]
```

Definition at line 2249 of file [compiler.c](#).

4.19.6.534 InsTree()

```
int InsTree (
    int bufnum,
    int h ) [extern]
```

Definition at line 355 of file [comtool.c](#).

4.19.6.535 FindTree()

```
int FindTree (
    int bufnum,
    WORD * subexpr ) [extern]
```

Definition at line 533 of file [comtool.c](#).

4.19.6.536 RedoTree()

```
void RedoTree (
    CBUF * C,
    int size ) [extern]
```

Definition at line 569 of file [comtool.c](#).

4.19.6.537 ClearTree()

```
void ClearTree (
    int i ) [extern]
```

Definition at line 588 of file [comtool.c](#).

4.19.6.538 CatchDollar()

```
int CatchDollar (
    int par ) [extern]
```

Definition at line 54 of file [dollar.c](#).

4.19.6.539 AssignDollar()

```
int AssignDollar (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 209 of file [dollar.c](#).

4.19.6.540 WriteDollarToBuffer()

```
UBYTE * WriteDollarToBuffer (
    WORD numdollar,
    WORD par ) [extern]
```

Definition at line 596 of file [dollar.c](#).

4.19.6.541 WriteDollarFactorToBuffer()

```
UBYTE * WriteDollarFactorToBuffer (
    WORD numdollar,
    WORD numfac,
    WORD par ) [extern]
```

Definition at line 687 of file [dollar.c](#).

4.19.6.542 AddToDollarBuffer()

```
void AddToDollarBuffer (
    UBYTE * s ) [extern]
```

Definition at line 762 of file [dollar.c](#).

4.19.6.543 PutTermInDollar()

```
int PutTermInDollar (
    WORD * term,
    WORD numdollar ) [extern]
```

Definition at line 863 of file [dollar.c](#).

4.19.6.544 TermAssign()

```
void TermAssign (
    WORD * term ) [extern]
```

Definition at line 803 of file [dollar.c](#).

4.19.6.545 WildDollars()

```
void WildDollars (
    PHEAD WORD * term ) [extern]
```

Definition at line 891 of file [dollar.c](#).

4.19.6.546 numcommute()

```
LONG numcommute (
    WORD * terms,
    LONG * numterms ) [extern]
```

Definition at line 659 of file [comtool.c](#).

4.19.6.547 FullRenumber()

```
int FullRenumber (
    PHEAD WORD * term,
    WORD par ) [extern]
```

Definition at line 324 of file [reshuf.c](#).

4.19.6.548 Lus()

```
int Lus (
    WORD * term,
    WORD funnum,
    WORD loopsize,
    WORD numargs,
    WORD outfun,
    WORD mode ) [extern]
```

Definition at line 57 of file [lus.c](#).

4.19.6.549 FindLus()

```
int FindLus (
    int from,
    int level,
    int openindex ) [extern]
```

Definition at line 515 of file [lus.c](#).

4.19.6.550 CoReplaceLoop()

```
int CoReplaceLoop (
    UBYTE * inp ) [extern]
```

Definition at line 5156 of file [compcomm.c](#).

4.19.6.551 CoFindLoop()

```
int CoFindLoop (
    UBYTE * inp ) [extern]
```

Definition at line 5148 of file [compcomm.c](#).

4.19.6.552 DoFindLoop()

```
int DoFindLoop (
    UBYTE * inp,
    int mode ) [extern]
```

Definition at line 5031 of file [compcomm.c](#).

4.19.6.553 CoFunPowers()

```
int CoFunPowers (
    UBYTE * inp ) [extern]
```

Definition at line 5176 of file [compcomm.c](#).

4.19.6.554 SortTheList()

```
int SortTheList (
    int * slist,
    int num ) [extern]
```

Definition at line 578 of file [lus.c](#).

4.19.6.555 MatchIsPossible()

```
int MatchIsPossible (
    WORD * pattern,
    WORD * term ) [extern]
```

Definition at line 299 of file [smart.c](#).

4.19.6.556 StudyPattern()

```
int StudyPattern (
    WORD * lhs ) [extern]
```

Definition at line 62 of file [smart.c](#).

4.19.6.557 DoIToTensor()

```
WORD DoIToTensor (
    PHEAD WORD ) [extern]
```

Definition at line 1082 of file [dollar.c](#).

4.19.6.558 DoIToFunction()

```
WORD DoIToFunction (
    PHEAD WORD ) [extern]
```

Definition at line 1143 of file [dollar.c](#).

4.19.6.559 DoIToVector()

```
WORD DoIToVector (
    PHEAD WORD ) [extern]
```

Definition at line 1200 of file [dollar.c](#).

4.19.6.560 DoIToNumber()

```
WORD DoIToNumber (
    PHEAD WORD ) [extern]
```

Definition at line 1264 of file [dollar.c](#).

4.19.6.561 DoIToSymbol()

```
WORD DoIToSymbol (
    PHEAD WORD ) [extern]
```

Definition at line 1323 of file [dollar.c](#).

4.19.6.562 DoIToIndex()

```
WORD DoIToIndex (
    PHEAD WORD ) [extern]
```

Definition at line 1377 of file [dollar.c](#).

4.19.6.563 DoIToLong()

```
LONG DoIToLong (
    PHEAD WORD ) [extern]
```

Definition at line 1606 of file [dollar.c](#).

4.19.6.564 DollarFactorize()

```
int DollarFactorize (
    PHEAD WORD ) [extern]
```

Definition at line 2955 of file [dollar.c](#).

4.19.6.565 CoPrintTable()

```
int CoPrintTable (
    UBYTE * inp ) [extern]
```

Definition at line 1748 of file [comexpr.c](#).

4.19.6.566 CoDeallocateTable()

```
int CoDeallocateTable (
    UBYTE * inp ) [extern]
```

Definition at line 1982 of file [comexpr.c](#).

4.19.6.567 CleanDollarFactors()

```
void CleanDollarFactors (
    DOLLARS d ) [extern]
```

Definition at line 3554 of file [dollar.c](#).

4.19.6.570 MakeDollarMod()


```
WORD * MakeDollarMod (
    PHEAD WORD * buffer,
    WORD ** bufout ) [extern]
```

Similar to MakeDollarInteger but now with modulus arithmetic using only a one WORD 'prime'. We make the coefficient of the first term in the argument equal to one. Already the coefficients are taken modulus AN.cmod and AN.ncmod == 1

Definition at line 3802 of file [dollar.c](#).

References [EndSort\(\)](#), [Generator\(\)](#), [GetModInverses\(\)](#), and [NewSort\(\)](#).

Here is the call graph for this function:

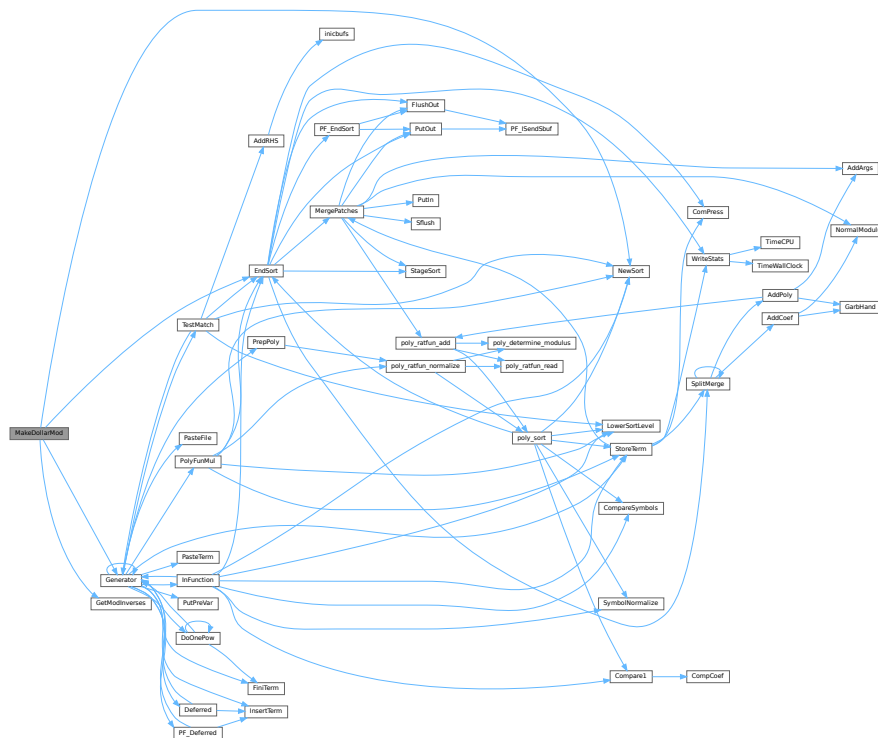

4.19.6.571 GetDolNum()

```
int GetDolNum (
    PHEAD WORD * t,
    WORD * tstop ) [extern]
```

Definition at line 3847 of file [dollar.c](#).

4.19.6.572 AddPotModdollar()

```
void AddPotModdollar (
    WORD numdollar ) [extern]
```

Adds a \$-variable specified by *numdollar* to the list of potentially modified \$-variables unless it has already been included in the list.

Parameters

<i>numdollar</i>	The index of the \$-variable to be added.
------------------	---

Definition at line 3960 of file [dollar.c](#).

4.19.6.573 Optimize()

```
int Optimize (
    WORD exprnr,
    int do_print ) [extern]
```

Optimization of expression

4.19.7 Description

This method takes an input expression and generates optimized code to calculate its value. The following methods are called to do so:

- (1) `get_expression` : to read to expression
- (2) `get_brackets` : find brackets for simultaneous optimization
- (3) `occurrence_order` or `find_Horner_MCTS` : to determine (the) Horner scheme(s) to use; this depends on `AO.optimize.horner`
- (4) `optimize_expression_given_Horner` : to do the optimizations for each Horner scheme; this method does either CSE or greedy optimizations dependings on `AO.optimize.method`
- (5) `generate_output` : to format the output in Form notation and store it in a buffer
- (6a) `optimize_print_code` : to print the expression (for "Print") or (6b) `generate_expression` : to modify the expression (for "#Optimize")


On ParFORM, all the processes must call this function at the same time. Then

- (1) Because only the master can access to the expression to be optimized, the master broadcast the expression to all the slaves after reading the expression (`PF_get_expression`).
- (2) `get_brackets` reads `optimize_expr` as the input and it works also on the slaves. We leave it although the bracket information is not needed on the slaves (used in (5) on the master).
- (3) and (4) `find_Horner_MCTS` and `optimize_expression_given_Horner` are parallelized.
- (5), (6a) and (6b) are needed only on the master.

Definition at line 4637 of file [optimize.cc](#).

References [ClearOptimize\(\)](#), [count_operators\(\)](#), [find_Horner_MCTS\(\)](#), [generate_expression\(\)](#), [generate_output\(\)](#), [get_brackets\(\)](#), [get_expression\(\)](#), [occurrence_order\(\)](#), [optimize_expression_given_Horner\(\)](#), [optimize_print_code\(\)](#), [PF_Broadcast\(\)](#), [PF_LongMultiBroadcast\(\)](#), [PF_Pack\(\)](#), [PF_PrepareLongMultiPack\(\)](#), [PF_PreparePack\(\)](#), [PF_Unpack\(\)](#), and [PutPreVar\(\)](#).

Here is the call graph for this function:

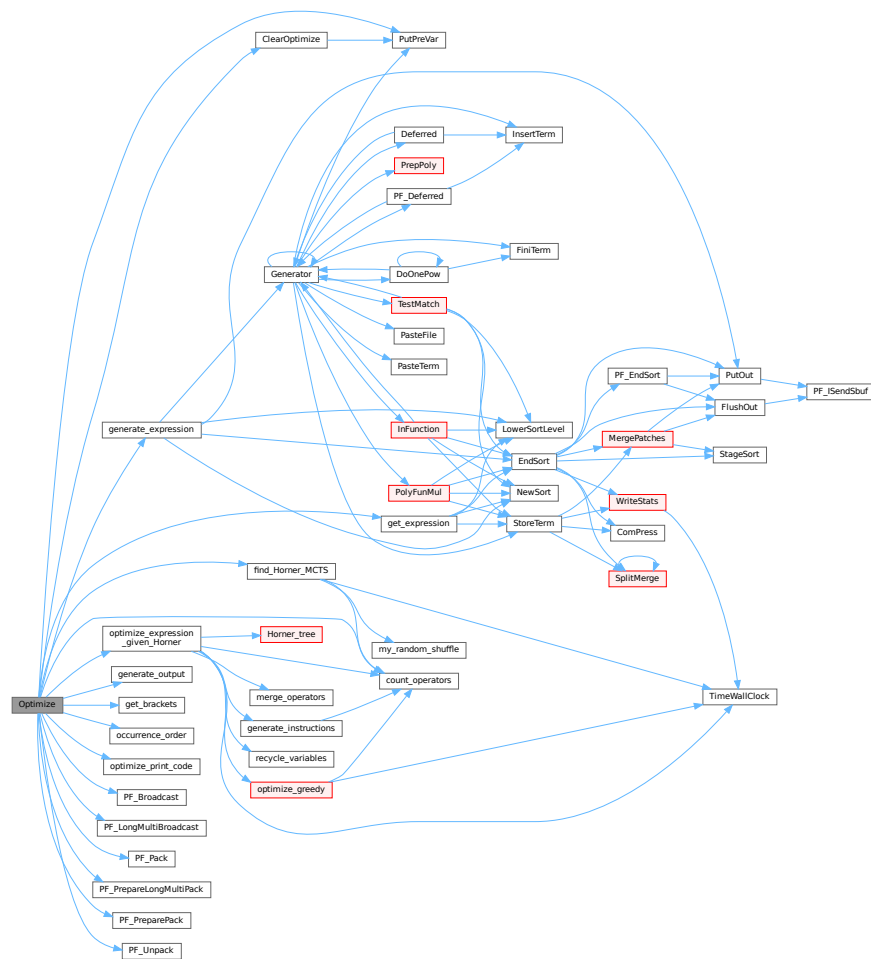

4.19.7.1 ClearOptimize()

```
int ClearOptimize (
    void ) [extern]
```

Optimization of expression

4.19.8 Description

Clears the buffers that were used for optimization output. Clears the expression from the buffers (marks it to be dropped). Note: we need to use the expression by its name, because numbers may change if we drop other expressions between when we do the optimizations and clear the results (in [execute.c](#)). Also this is not 100% safe, because we could overwrite the optimized expression. But that can be done only in a Local or Global statement and hence we only have to test there that we might have to call ClearOptimize first. (in file [comexpr.c](#))

Definition at line 4974 of file [optimize.cc](#).

References [PutPreVar\(\)](#).

Referenced by [Optimize\(\)](#).

Here is the call graph for this function:



4.19.8.1 TakeLongRoot()

```
int TakeLongRoot (
    UWORD * a,
    WORD * n,
    WORD power ) [extern]
```

Definition at line [2736](#) of file [reken.c](#).

4.19.8.2 TakeRatRoot()

```
int TakeRatRoot (
    UWORD * a,
    WORD * n,
    WORD power ) [extern]
```

Definition at line [681](#) of file [reken.c](#).

4.19.8.3 MakeRational()

```
int MakeRational (
    WORD a,
    WORD m,
    WORD * b,
    WORD * c ) [extern]
```

Definition at line [2856](#) of file [reken.c](#).

4.19.8.4 MakeLongRational()

```
int MakeLongRational (
    PHEAD UWORD * a,
    WORD na,
    UWORD * m,
    WORD nm,
    UWORD * b,
    WORD * nb ) [extern]
```

Definition at line [2904](#) of file [reken.c](#).

4.19.8.5 ClearTableTree()

```
void ClearTableTree (
    TABLES T ) [extern]
```

Definition at line 72 of file [tables.c](#).

4.19.8.6 InsTableTree()

```
int InsTableTree (
    TABLES T,
    WORD * tp ) [extern]
```

Definition at line 103 of file [tables.c](#).

4.19.8.7 RedoTableTree()

```
void RedoTableTree (
    TABLES T,
    int newsize ) [extern]
```

Definition at line 266 of file [tables.c](#).

4.19.8.8 FindTableTree()

```
int FindTableTree (
    TABLES T,
    WORD * tp,
    int inc ) [extern]
```

Definition at line 291 of file [tables.c](#).

4.19.8.9 finishcbuf()

```
void finishcbuf (
    WORD num ) [extern]
```

Frees a compiler buffer.

Parameters

<i>num</i>	The ID number for the buffer to be freed.
------------	---

Definition at line 89 of file [comtool.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::CanCommu](#), [CbUf::lhs](#), [CbUf::NumTerms](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Referenced by [PF_BroadcastCBuf\(\)](#).

4.19.8.10 clearcbuf()

```
void clearcbuf (
    WORD num ) [extern]
```

Clears contents in a compiler buffer.

Parameters

<i>num</i>	The ID number for the buffer to be cleared.
------------	---

Definition at line 116 of file [comtool.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::Pointer](#), and [CbUf::rhs](#).

4.19.8.11 CleanUpSort()

```
void CleanUpSort (
    int num ) [extern]
```

Partially or completely frees function sort buffers.

Definition at line 4856 of file [sort.c](#).

4.19.8.12 AllocFileHandle()

```
FILEHANDLE * AllocFileHandle (
    WORD par,
    char * name ) [extern]
```

Definition at line 1033 of file [setfile.c](#).

4.19.8.13 DeAllocFileHandle()

```
void DeAllocFileHandle (
    FILEHANDLE * fh ) [extern]
```

Definition at line 1094 of file [setfile.c](#).

4.19.8.14 LowerSortLevel()

```
void LowerSortLevel (
    void ) [extern]
```

Lowers the level in the sort system.

Definition at line 4956 of file [sort.c](#).

Referenced by [generate_expression\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_sort\(\)](#), [poly_unfactorize_expression\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), and [TestMatch\(\)](#).

4.19.8.15 PolyRatFunSpecial()

```
WORD * PolyRatFunSpecial (
    PHEAD WORD * t1,
    WORD * t2 ) [extern]
```

Definition at line [4973](#) of file [sort.c](#).

4.19.8.16 SimpleSplitMergeRec()

```
void SimpleSplitMergeRec (
    WORD * array,
    WORD num,
    WORD * auxarray ) [extern]
```

Definition at line [5075](#) of file [sort.c](#).

4.19.8.17 SimpleSplitMerge()

```
void SimpleSplitMerge (
    WORD * array,
    WORD num ) [extern]
```

Definition at line [5103](#) of file [sort.c](#).

4.19.8.18 BinarySearch()

```
WORD BinarySearch (
    WORD * array,
    WORD num,
    WORD x ) [extern]
```

Definition at line [5121](#) of file [sort.c](#).

4.19.8.19 InsideDollar()

```
int InsideDollar (
    PHEAD WORD * ll,
    WORD level ) [extern]
```

Definition at line [1746](#) of file [dollar.c](#).

4.19.8.20 DolToTerms()

```
DOLLARS DolToTerms (
    PHEAD WORD ) [extern]
```

Definition at line [1458](#) of file [dollar.c](#).

4.19.8.21 EvalDoLoopArg()

```
WORD EvalDoLoopArg (
    PHEAD WORD * arg,
    WORD par ) [extern]
```

Evaluates one argument of a do loop. Such an argument is constructed from SNUMBERS DOLLAREXPRES-
SIONs and possibly DOLLAREXPR2s which indicate factors of the preceding dollar. Hence we have SNUM-
BER,num DOLLAREXPRESSSION,numdollar DOLLAREXPRESSSION,numdollar,DOLLAREXPR2,numfactor DOL-
LAREXPRESSSION,numdollar,DOLLAREXPR2,numfactor,DOLLAREXPR2,numfactor etc. Because we have a do-
loop at every stage we should have a number. The notation in DOLLAREXPR2 is that ≥ 0 is number of yet another
dollar and < 0 is $-n-1$ with n the array element or zero. The return value is the (short) number. The routine works its
way through the list in a recursive manner.

Definition at line 2651 of file [dollar.c](#).

References [EvalDoLoopArg\(\)](#).

Referenced by [EvalDoLoopArg\(\)](#).

Here is the call graph for this function:



4.19.8.22 SetExprCases()

```
int SetExprCases (
    int par,
    int setunset,
    int val ) [extern]
```

Definition at line 1363 of file [compcomm.c](#).

4.19.8.23 TestSelect()

```
int TestSelect (
    WORD * term,
    WORD * setp ) [extern]
```

Definition at line 1748 of file [pattern.c](#).

4.19.8.24 SubsInAll()

```
void SubsInAll (
    PHEAD0 ) [extern]
```

Definition at line 1982 of file [pattern.c](#).

4.19.8.25 TransferBuffer()

```
void TransferBuffer (
    int from,
    int to,
    int spectator ) [extern]
```

Definition at line 2143 of file [pattern.c](#).

4.19.8.26 TakeIDfunction()

```
int TakeIDfunction (
    PHEAD WORD * term ) [extern]
```

Definition at line 2213 of file [pattern.c](#).

4.19.8.27 MakeSetupAllocs()

```
int MakeSetupAllocs (
    void ) [extern]
```

Definition at line 1111 of file [setfile.c](#).

4.19.8.28 TryFileSetups()

```
int TryFileSetups (
    void ) [extern]
```

Definition at line 1131 of file [setfile.c](#).

4.19.8.29 ExchangeExpressions()

```
void ExchangeExpressions (
    int num1,
    int num2 ) [extern]
```

Definition at line 1671 of file [execute.c](#).

4.19.8.30 ExchangeDollars()

```
void ExchangeDollars (
    int num1,
    int num2 ) [extern]
```

Definition at line [1849](#) of file [dollar.c](#).

4.19.8.31 GetFirstBracket()

```
int GetFirstBracket (
    WORD * term,
    int num ) [extern]
```

Definition at line [1745](#) of file [execute.c](#).

4.19.8.32 GetFirstTerm()

```
int GetFirstTerm (
    WORD * term,
    int num,
    int pre ) [extern]
```

Gets the first term of an expression. Routine should be thread safe.

Parameters

out	<i>term</i>	Pointer to the buffer where the term should be written.
in	<i>num</i>	The expression number from which to get the term.
in	<i>pre</i>	Denotes a pre-processor call (1) or not (0). Used to determine the correct source file for the expression.

Returns

First WORD of term, a negative value denotes an error.

Definition at line [1864](#) of file [execute.c](#).

References [FiLe::handle](#), [VaRrEnUm::lo](#), and [ReNuMbEr::syMb](#).

4.19.8.33 GetContent()

```
int GetContent (
    WORD * content,
    int num ) [extern]
```

Definition at line [1972](#) of file [execute.c](#).

4.19.8.34 CleanupTerm()

```
int CleanupTerm (
    WORD * term ) [extern]
```

Definition at line 2089 of file [execute.c](#).

4.19.8.35 ContentMerge()

```
WORD ContentMerge (
    PHEAD WORD * content,
    WORD * term ) [extern]
```

Definition at line 2113 of file [execute.c](#).

4.19.8.36 PreIfDollarEval()

```
UBYTE * PreIfDollarEval (
    UBYTE * s,
    int * value ) [extern]
```

Definition at line 1978 of file [dollar.c](#).

4.19.8.37 TermsInDollar()

```
LONG TermsInDollar (
    WORD num ) [extern]
```

Definition at line 1867 of file [dollar.c](#).

4.19.8.38 SizeOfDollar()

```
LONG SizeOfDollar (
    WORD num ) [extern]
```

Definition at line 1916 of file [dollar.c](#).

4.19.8.39 TermsInExpression()

```
LONG TermsInExpression (
    WORD num ) [extern]
```

Definition at line 2377 of file [execute.c](#).

4.19.8.40 SizeOfExpression()

```
LONG SizeOfExpression (
    WORD num ) [extern]
```

Definition at line 2389 of file [execute.c](#).

4.19.8.41 TranslateExpression()

```
WORD * TranslateExpression (
    UBYTE * s ) [extern]
```

Definition at line [2160](#) of file [dollar.c](#).

4.19.8.42 IsSetMember()

```
int IsSetMember (
    WORD * buffer,
    WORD numset ) [extern]
```

Definition at line [2217](#) of file [dollar.c](#).

4.19.8.43 IsMultipleOf()

```
int IsMultipleOf (
    WORD * buf1,
    WORD * buf2 ) [extern]
```

Definition at line [2398](#) of file [dollar.c](#).

4.19.8.44 TwoExprCompare()

```
int TwoExprCompare (
    WORD * buf1,
    WORD * buf2,
    int oprtr ) [extern]
```

Definition at line [2473](#) of file [dollar.c](#).

4.19.8.45 UpdatePositions()

```
void UpdatePositions (
    void ) [extern]
```

Definition at line [2401](#) of file [execute.c](#).

4.19.8.46 M_print()

```
void M_print (
    void ) [extern]
```

Definition at line [2434](#) of file [tools.c](#).

4.19.8.47 M_check1()

```
void M_check1 (
    void ) [extern]
```

Definition at line 2433 of file [tools.c](#).

4.19.8.48 PrintTime()

```
void PrintTime (
    UBYTE * mess ) [extern]
```

Definition at line 784 of file [sch.c](#).

4.19.8.49 FindBracket()

```
POSITION * FindBracket (
    WORD nexp,
    WORD * bracket ) [extern]
```

Definition at line 65 of file [index.c](#).

4.19.8.50 PutBracketInIndex()

```
void PutBracketInIndex (
    PHEAD WORD * term,
    POSITION * newpos ) [extern]
```

Definition at line 331 of file [index.c](#).

4.19.8.51 ClearBracketIndex()

```
void ClearBracketIndex (
    WORD numexp ) [extern]
```

Definition at line 546 of file [index.c](#).

4.19.8.52 OpenBracketIndex()

```
void OpenBracketIndex (
    WORD nexpr ) [extern]
```

Definition at line 578 of file [index.c](#).

4.19.8.53 DoNoParallel()

```
int DoNoParallel (
    UBYTE * s ) [extern]
```

Definition at line 529 of file [module.c](#).

4.19.8.54 DoParallel()

```
int DoParallel (
    UBYTE * s ) [extern]
```

Definition at line 544 of file [module.c](#).

4.19.8.55 DoModSum()

```
int DoModSum (
    UBYTE * s ) [extern]
```

Definition at line 559 of file [module.c](#).

4.19.8.56 DoModMax()

```
int DoModMax (
    UBYTE * s ) [extern]
```

Definition at line 579 of file [module.c](#).

4.19.8.57 DoModMin()

```
int DoModMin (
    UBYTE * s ) [extern]
```

Definition at line 599 of file [module.c](#).

4.19.8.58 DoModLocal()

```
int DoModLocal (
    UBYTE * s ) [extern]
```

Definition at line 619 of file [module.c](#).

4.19.8.59 DoModDollar()

```
UBYTE * DoModDollar (
    UBYTE * s,
    int type ) [extern]
```

Definition at line 657 of file [module.c](#).

4.19.8.60 DoProcessBucket()

```
int DoProcessBucket (
    UBYTE * s ) [extern]
```

Definition at line 639 of file [module.c](#).

4.19.8.61 DoinParallel()

```
int DoinParallel (
    UBYTE * s ) [extern]
```

Definition at line 758 of file [module.c](#).

4.19.8.62 DonotinParallel()

```
int DonotinParallel (
    UBYTE * s ) [extern]
```

Definition at line 768 of file [module.c](#).

4.19.8.63 FlipTable()

```
int FlipTable (
    FUNCTIONS f,
    int type ) [extern]
```

Definition at line 671 of file [tables.c](#).

4.19.8.64 ChainIn()

```
int ChainIn (
    PHEAD WORD * term,
    WORD funnum ) [extern]
```

Definition at line 691 of file [function.c](#).

4.19.8.65 ChainOut()

```
int ChainOut (
    PHEAD WORD * term,
    WORD funnum ) [extern]
```

Definition at line 748 of file [function.c](#).

4.19.8.66 ArgumentImplode()

```
int ArgumentImplode (
    PHEAD WORD * term,
    WORD * thelist ) [extern]
```

Definition at line 1851 of file [argument.c](#).

4.19.8.67 ArgumentExplode()

```
int ArgumentExplode (
    PHEAD WORD * term,
    WORD * thelist ) [extern]
```

Definition at line [1955](#) of file [argument.c](#).

4.19.8.68 DenToFunction()

```
int DenToFunction (
    WORD * term,
    WORD numfun ) [extern]
```

Definition at line [2557](#) of file [wildcard.c](#).

4.19.8.69 HowMany()

```
WORD HowMany (
    PHEAD WORD * ifcode,
    WORD * term ) [extern]
```

Definition at line [840](#) of file [if.c](#).

4.19.8.70 RemoveDollars()

```
void RemoveDollars (
    void ) [extern]
```

Definition at line [3132](#) of file [names.c](#).

4.19.8.71 CountTerms1()

```
LONG CountTerms1 (
    PHEAD0 ) [extern]
```

Definition at line [2461](#) of file [execute.c](#).

4.19.8.72 TermsInBracket()

```
LONG TermsInBracket (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line [2569](#) of file [execute.c](#).

4.19.8.73 Crash()

```
int Crash (
    void ) [extern]
```

Definition at line 3751 of file [tools.c](#).

4.19.8.74 str_dup()

```
char * str_dup (
    char * str ) [extern]
```

Definition at line 101 of file [minos.c](#).

4.19.8.75 convertblock()

```
void convertblock (
    INDEXBLOCK * in,
    INDEXBLOCK * out,
    int mode ) [extern]
```

Definition at line 120 of file [minos.c](#).

4.19.8.76 convertnamesblock()

```
void convertnamesblock (
    NAMESBLOCK * in,
    NAMESBLOCK * out,
    int mode ) [extern]
```

Definition at line 171 of file [minos.c](#).

4.19.8.77 convertiniinfo()

```
void convertiniinfo (
    INIINFO * in,
    INIINFO * out,
    int mode ) [extern]
```

Definition at line 197 of file [minos.c](#).

4.19.8.78 ReadIndex()

```
int ReadIndex (
    DBASE * d ) [extern]
```

Definition at line 288 of file [minos.c](#).

4.19.8.79 WriteIndexBlock()

```
int WriteIndexBlock (
    DBASE * d,
    MLONG num ) [extern]
```

Definition at line 399 of file [minos.c](#).

4.19.8.80 WriteNamesBlock()

```
int WriteNamesBlock (
    DBASE * d,
    MLONG num ) [extern]
```

Definition at line 420 of file [minos.c](#).

4.19.8.81 WriteIndex()

```
int WriteIndex (
    DBASE * d ) [extern]
```

Definition at line 443 of file [minos.c](#).

4.19.8.82 WriteIniInfo()

```
int WriteIniInfo (
    DBASE * d ) [extern]
```

Definition at line 506 of file [minos.c](#).

4.19.8.83 ReadIniInfo()

```
int ReadIniInfo (
    DBASE * d ) [extern]
```

Definition at line 523 of file [minos.c](#).

4.19.8.84 AddToIndex()

```
int AddToIndex (
    DBASE * d,
    MLONG number ) [extern]
```

Definition at line 1065 of file [minos.c](#).

4.19.8.85 GetDbase()

```
DBASE * GetDbase (
    char * filename,
    MLONG rwmode ) [extern]
```

Definition at line 546 of file [minos.c](#).

4.19.8.86 OpenDbase()

```
DBASE * OpenDbase (
    char * filename ) [extern]
```

Definition at line 820 of file [minos.c](#).

4.19.8.87 ReadObject()

```
char * ReadObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments ) [extern]
```

Definition at line 1294 of file [minos.c](#).

4.19.8.88 ReadijObject()

```
char * ReadijObject (
    DBASE * d,
    MLONG i,
    MLONG j,
    char * arguments ) [extern]
```

Definition at line 1375 of file [minos.c](#).

4.19.8.89 ExistsObject()

```
int ExistsObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments ) [extern]
```

Definition at line 1427 of file [minos.c](#).

4.19.8.90 DeleteObject()

```
int DeleteObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments ) [extern]
```

Definition at line 1459 of file [minos.c](#).

4.19.8.91 WriteObject()

```
int WriteObject (
    DBASE * d,
    MLONG tablename,
    char * arguments,
    char * rhs,
    MLONG number ) [extern]
```

Definition at line 1194 of file [minos.c](#).

4.19.8.92 AddObject()

```
MLONG AddObject (
    DBASE * d,
    MLONG tablename,
    char * arguments,
    char * rhs ) [extern]
```

Definition at line 1152 of file [minos.c](#).

4.19.8.93 NewDbase()

```
DBASE * NewDbase (
    char * name,
    MLONG number ) [extern]
```

Definition at line 602 of file [minos.c](#).

4.19.8.94 FreeTableBase()

```
void FreeTableBase (
    DBASE * d ) [extern]
```

Definition at line 739 of file [minos.c](#).

4.19.8.95 ComposeTableNames()

```
int ComposeTableNames (
    DBASE * d ) [extern]
```

Definition at line 771 of file [minos.c](#).

4.19.8.96 PutTableNames()

```
int PutTableNames (
    DBASE * d ) [extern]
```

Definition at line 969 of file [minos.c](#).

4.19.8.97 AddTableName()

```
MLONG AddTableName (
    DBASE * d,
    char * name,
    TABLES T ) [extern]
```

Definition at line 854 of file [minos.c](#).

4.19.8.98 GetTableName()

```
MLONG GetTableName (
    DBASE * d,
    char * name ) [extern]
```

Definition at line 937 of file [minos.c](#).

4.19.8.99 FindTableNumber()

```
MLONG FindTableNumber (
    DBASE * d,
    char * name ) [extern]
```

Definition at line 1166 of file [minos.c](#).

4.19.8.100 TryEnvironment()

```
int TryEnvironment (
    void ) [extern]
```

Definition at line 1217 of file [setfile.c](#).

4.19.8.101 CopyExpression()

```
int CopyExpression (
    FILEHANDLE * from,
    FILEHANDLE * to ) [extern]
```

Definition at line 3307 of file [store.c](#).

4.19.8.102 set_in()

```
int set_in (
    UBYTE ch,
    set_of_char set ) [extern]
```

Definition at line 2114 of file [tools.c](#).

4.19.8.103 set_set()

```
one_byte set_set (
    UBYTE ch,
    set_of_char set ) [extern]
```

Definition at line 2134 of file [tools.c](#).

4.19.8.104 set_del()

```
one_byte set_del (
    UBYTE ch,
    set_of_char set ) [extern]
```

Definition at line 2155 of file [tools.c](#).

4.19.8.105 set_sub()

```
one_byte set_sub (
    set_of_char set,
    set_of_char set1,
    set_of_char set2 ) [extern]
```

Definition at line 2177 of file [tools.c](#).

4.19.8.106 DoPreAddSeparator()

```
int DoPreAddSeparator (
    UBYTE * s ) [extern]
```

Definition at line 5460 of file [pre.c](#).

4.19.8.107 DoPreRmSeparator()

```
int DoPreRmSeparator (
    UBYTE * s ) [extern]
```

Definition at line 5485 of file [pre.c](#).

4.19.8.108 openExternalChannel()

```
int openExternalChannel (
    UBYTE * cmd,
    int daemonize,
    UBYTE * shellname,
    UBYTE * stderrname ) [extern]
```

Definition at line 230 of file [extcmd.c](#).

4.19.8.109 initPresetExternalChannels()

```
int initPresetExternalChannels (
    UBYTE * theline,
    int thetimeout ) [extern]
```

Definition at line [232](#) of file [extcmd.c](#).

4.19.8.110 closeExternalChannel()

```
int closeExternalChannel (
    int n ) [extern]
```

Definition at line [233](#) of file [extcmd.c](#).

4.19.8.111 selectExternalChannel()

```
int selectExternalChannel (
    int n ) [extern]
```

Definition at line [234](#) of file [extcmd.c](#).

4.19.8.112 getCurrentExternalChannel()

```
int getCurrentExternalChannel (
    void ) [extern]
```

Definition at line [235](#) of file [extcmd.c](#).

4.19.8.113 closeAllExternalChannels()

```
void closeAllExternalChannels (
    void ) [extern]
```

Definition at line [236](#) of file [extcmd.c](#).

4.19.8.114 defineChannel()

```
UBYTE * defineChannel (
    UBYTE * s,
    HANDLERS * h ) [extern]
```

Definition at line [6111](#) of file [pre.c](#).

4.19.8.115 writeToChannel()

```
int writeToChannel (
    int wtype,
    UBYTE * s,
    HANDLERS * h ) [extern]
```

Definition at line 6146 of file [pre.c](#).

4.19.8.116 ReleaseTB()

```
int ReleaseTB (
    void ) [extern]
```

Definition at line 2317 of file [tables.c](#).

4.19.8.117 SymbolNormalize()

```
int SymbolNormalize (
    WORD * term ) [extern]
```

Routine normalizes terms that contain only symbols. Regular minimum and maximum properties are ignored.

We check whether there are negative powers in the output. This is not allowed.

Definition at line 5164 of file [normal.c](#).

Referenced by [InFunction\(\)](#), and [poly_sort\(\)](#).

4.19.8.118 TestFunFlag()

```
int TestFunFlag (
    PHEAD WORD * tfun ) [extern]
```

Definition at line 5260 of file [normal.c](#).

4.19.8.119 CompareSymbols()

```
WORD CompareSymbols (
    PHEAD WORD * term1,
    WORD * term2,
    WORD par ) [extern]
```

Compares the terms, based on the value of AN.polysortflag. If $term1 < term2$ the return value is -1 If $term1 > term2$ the return value is 1 If $term1 = term2$ the return value is 0 The coefficients may differ. The terms contain only a single subterm of type SYMBOL. If AN.polysortflag = 0 it is a 'regular' compare. If AN.polysortflag = 1 the sum of the powers is more important par is a dummy parameter to make the parameter field identical to that of Compare1 which is the regular compare routine in [sort.c](#)

Definition at line 3110 of file [sort.c](#).

Referenced by [InFunction\(\)](#), and [poly_sort\(\)](#).

4.19.8.120 CompareHSymbols()

```
WORD CompareHSymbols (
    PHEAD WORD * term1,
    WORD * term2,
    WORD par ) [extern]
```

Compares terms that can have only SYMBOL and HAAKJE subterms. If $\text{term1} < \text{term2}$ the return value is -1 If $\text{term1} > \text{term2}$ the return value is 1 If $\text{term1} = \text{term2}$ the return value is 0 par is a dummy parameter to make the parameter field identical to that of Compare1 which is the regular compare routine in [sort.c](#)

Definition at line [3153](#) of file [sort.c](#).

4.19.8.121 NextPrime()

```
WORD NextPrime (
    PHEAD WORD num ) [extern]
```

Gives the next prime number in the list of prime numbers.

If the list isn't long enough we expand it. For ease in ParForm and because these lists shouldn't be very big we let each worker keep its own list.

The list is cut off at MAXPOWER, because we don't want to get into trouble that the power of a variable gets larger than the prime number.

Definition at line [3665](#) of file [reken.c](#).

4.19.8.122 Moebius()

```
WORD Moebius (
    PHEAD WORD ) [extern]
```

Definition at line [3729](#) of file [reken.c](#).

4.19.8.123 wranf()

```
UWORD wranf (
    PHEAD0 ) [extern]
```

Definition at line [3869](#) of file [reken.c](#).

4.19.8.124 iranf()

```
UWORD iranf (
    PHEAD UWORD ) [extern]
```

Definition at line [3888](#) of file [reken.c](#).

4.19.8.125 iniwranf()

```
void iniwranf (
    PHEAD0 ) [extern]
```

Definition at line 3820 of file [reken.c](#).

4.19.8.126 PreRandom()

```
UBYTE * PreRandom (
    UBYTE * s ) [extern]
```

Definition at line 3913 of file [reken.c](#).

4.19.8.127 TreatPolyRatFun()

```
int TreatPolyRatFun (
    PHEAD WORD * prf ) [extern]
```

Definition at line 4980 of file [normal.c](#).

4.19.8.128 ReadSaveHeader()

```
int ReadSaveHeader (
    void ) [extern]
```

Reads the header in the save file and sets function pointers and flags according to the information found there. Must be called before any other ReadSave... function.

Currently works only for the exchange between 32bit and 64bit machines (WORD size must be 2 or 4 bytes)!

It is called by CoLoad().

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 4057 of file [store.c](#).

4.19.8.129 ReadSaveIndex()

```
LONG ReadSaveIndex (
    FILEINDEX * fileind ) [extern]
```

Reads a FILEINDEX from the open save file specified by AO.SaveData.Handle. Translations for adjusting endianness and data sizes are done if necessary.

Depends on the assumption that sizeof(FILEINDEX) is the same everywhere. If FILEINDEX or INDEXENTRY change, then this functions has to be adjusted.

Called by CoLoad() and FindInIndex().

Parameters

<i>fileind</i>	contains the read FILEINDEX after successful return. must point to allocated, big enough memory.
----------------	--

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 4175 of file [store.c](#).

References [INFILEINDEX](#), [FiLeInDeX::next](#), [FiLeInDeX::number](#), and [FuNcTiOn::number](#).

4.19.8.130 ReadSaveExpression()

```
LONG ReadSaveExpression (
    UBYTE * buffer,
    UBYTE * top,
    LONG * size,
    LONG * outsize ) [extern]
```

Reads an expression from the open file specified by AO.SaveData.Handle. The endianness flip and a resizing without renumbering is done in this function. Thereafter the buffer consists of chunks with a uniform maximal word size (32bit at the moment). The actual renumbering is then done by calling the function [ReadSaveTerm32\(\)](#). The result is returned in *buffer*.

If the translation at some point doesn't fit into the buffer anymore, the function returns and must be called again. In any case *size* returns the number of successfully read bytes, *outsize* returns the number of successfully written bytes, and the file will be positioned at the next byte after the successfully read data.

It is called by PutInStore().

Parameters

<i>buffer</i>	output buffer, holds the (translated) expression
<i>top</i>	end of buffer
<i>size</i>	number of read bytes
<i>outsize</i>	number of written bytes


Returns

= 0 everything okay, != 0 an error occurred

Definition at line 5138 of file [store.c](#).

References [ReadSaveTerm32\(\)](#).

Here is the call graph for this function:



4.19.8.131 ReadSaveTerm32()

```

UBYTE * ReadSaveTerm32 (
    UBYTE * bin,
    UBYTE * binend,
    UBYTE ** bout,
    UBYTE * boutend,
    UBYTE * top,
    int terminbuf ) [extern]
  
```

Reads a single term from the given buffer at *bin* and write the translated term back to this buffer at *bout*.

[ReadSaveTerm32\(\)](#) is currently the only instantiation of a `ReadSaveTerm`-function. It only deals with data that already has the correct endianness and that is resized to 32bit words but without being renumbered or translated in any other way. It uses the compress buffer `AR.CompressBuffer`.

The function is reentrant in order to cope with nested function arguments. It is called by [ReadSaveExpression\(\)](#) and itself.

The *return value* indicates the position in the input buffer up to which the data has already been successfully processed. The parameter *bout* returns the corresponding position in the output buffer.

Parameters

<i>bin</i>	start of the input buffer
<i>binend</i>	end of the input buffer
<i>bout</i>	as input points to the beginning of the output buffer, as output points behind the already translated data in the output buffer
<i>boutend</i>	end of already decompressed data in output buffer
<i>top</i>	end of output buffer
<i>terminbuf</i>	flag whether decompressed data is already in the output buffer. used in recursive calls

Returns


pointer to the next unprocessed data in the input buffer

Definition at line [4728](#) of file [store.c](#).

References [ReadSaveTerm32\(\)](#).

Referenced by [ReadSaveExpression\(\)](#), and [ReadSaveTerm32\(\)](#).

Here is the call graph for this function:



4.19.8.132 ReadSaveVariables()

```

LONG ReadSaveVariables (
    UBYTE * buffer,
    UBYTE * top,
    LONG * size,
    LONG * outsize,
    INDEXENTRY * ind,
    LONG * stage ) [extern]
  
```

Reads the variables from the open file specified by AO.SaveData.Handle. It reads the **size* bytes and writes them to the **buffer*. It is called by PutInStore().

If translation is necessary, the data might shrink or grow in size, then **size* is adjusted so that the reading and writing fits into the memory from the buffer to the top. The actual number of read bytes is returned in **size*, the number of written bytes is returned in **outsize*.

If the **size* is smaller than the actual size of the variables, this function will be called several times and needs to remember the current position in the variable structure. The parameter *stage* does this job. When [ReadSaveVariables\(\)](#) is called for the first time, this parameter should have the value -1.

The parameter *ind* is used to get the number of variables.

Parameters

<i>buffer</i>	read variables are written into this allocated memory
<i>top</i>	upper end of allocated memory
<i>size</i>	number of bytes to read. might return a smaller number of read bytes if translation was necessary
<i>outsize</i>	if translation has be done, outsize contains the number of written bytes
<i>ind</i>	pointer of INDEXENTRY for the current expression. read-only
<i>stage</i>	should be -1 for the first call, will be increased by ReadSaveVariables to memorize the position in the variable structure

Returns

= 0 everything okay, != 0 an error occurred

Definition at line [4361](#) of file [store.c](#).

References [InDeXeNtRy::nfunctions](#), [InDeXeNtRy::nindices](#), [InDeXeNtRy::nsymbols](#), [InDeXeNtRy::nvectors](#), and [FuNcTiOn::spec](#).

4.19.8.133 WriteStoreHeader()

```
LONG WriteStoreHeader (
    WORD handle ) [extern]
```

Writes header with information about system architecture and FORM revision to an open store file.

Called by [SetFileIndex\(\)](#).

Parameters

<i>handle</i>	specifies open file to which header will be written
---------------	---

Returns

= 0 everything okay, != 0 an error occurred

Definition at line [3964](#) of file [store.c](#).

References [STOREHEADER::endianness](#), [STOREHEADER::lenLONG](#), [STOREHEADER::lenPOINTER](#), [STOREHEADER::lenPOS](#), [STOREHEADER::lenWORD](#), [STOREHEADER::maxpower](#), [STOREHEADER::sFun](#), [STOREHEADER::sInd](#), [STOREHEADER::sSym](#), [STOREHEADER::sVec](#), and [STOREHEADER::wildoffset](#).

Referenced by [SetFileIndex\(\)](#).

4.19.8.134 InitRecovery()

```
void InitRecovery (
    void ) [extern]
```

Sets up the strings for the filenames of the recovery files. This functions should only be called once to avoid memory leaks and after AM.TempDir has been initialized.

Definition at line [399](#) of file [checkpoint.c](#).

4.19.8.135 CheckRecoveryFile()

```
int CheckRecoveryFile (
    void ) [extern]
```

Checks whether a snapshot/recovery file exists. Returns 1 if it exists, 0 otherwise.

Definition at line [278](#) of file [checkpoint.c](#).

References [RecoveryFilename\(\)](#).

Here is the call graph for this function:



4.19.8.136 DeleteRecoveryFile()

```
void DeleteRecoveryFile (  
    void ) [extern]
```

Deletes the recovery files. It is called by `CleanUp()` in the case of a successful completion.

Definition at line 333 of file [checkpoint.c](#).

4.19.8.137 RecoveryFilename()

```
char * RecoveryFilename (  
    void ) [extern]
```

Returns pointer to recovery filename.

Definition at line 364 of file [checkpoint.c](#).

Referenced by [CheckRecoveryFile\(\)](#), and [DoRecovery\(\)](#).

4.19.8.138 DoRecovery()

```
int DoRecovery (  
    int * moduletype ) [extern]
```

Reads from the recovery file and restores all necessary variables and states in FORM, so that the execution can recommence in preprocessor() as if no restart of FORM had occurred.

The recovery file is read into memory as a whole. The pointer `p` then points into this memory at the next non-processed data. The macros by which variables are restored, like `R_SET`, automatically increase `p` appropriately.

If something goes wrong, the function returns with a non-zero value.


Allocated memory that would be lost when overwriting the global structs with data from the file is freed first. A major part of the code deals with the restoration of pointers. The idiom we use is to memorize the original pointer value (`org`), allocate new memory and copy the data from the file into this memory, calculate the offset between the old pointer value and the new allocated memory position (`ofs`), and then correct all affected pointers (`+=ofs`).

We rely on the fact that several variables (especially in AM) are already assigned the correct values by the startup functions. That means, in principle, that a change in the setup files between snapshot creation and recovery will be noticed.

Definition at line 1402 of file [checkpoint.c](#).

References [TaBIEs::argtail](#), [TaBIEs::boomlijst](#), [BrAcKeTiNfO::bracketbuffer](#), [TaBIEs::buffers](#), [TaBIEs::buffersize](#), [CopyFile\(\)](#), [TaBIEs::flags](#), [ReNuMbEr::func](#), [ReNuMbEr::funnum](#), [VaRrEnUm::hi](#), [BrAcKeTiNfO::indexbuffer](#), [ReNuMbEr::indi](#), [ReNuMbEr::indnum](#), [VaRrEnUm::lo](#), [TaBIEs::MaxTreeSize](#), [TaBIEs::mm](#), [TaBIEs::numind](#), [TaBIEs::pattern](#), [TaBIEs::prototype](#), [TaBIEs::prototypeSize](#), [RecoveryFilename\(\)](#), [ExPrEsSiOn::renumlists](#), [TaBIEs::reserved](#), [TaBIEs::spare](#), [TaBIEs::sparse](#), [VaRrEnUm::start](#), [ReNuMbEr::symb](#), [ReNuMbEr::symnum](#), [TaBIEs::tablepointers](#), [TimeWallClock\(\)](#), [TaBIEs::totind](#), [ReNuMbEr::vecnum](#), and [ReNuMbEr::vect](#).

Here is the call graph for this function:

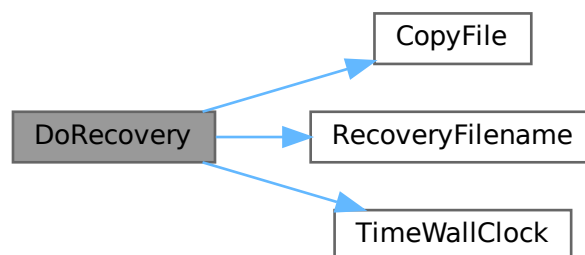

4.19.8.139 DoCheckpoint()


```
void DoCheckpoint (
    int moduletype ) [extern]
```

Checks whether a snapshot should be done. Calls `DoSnapshot()` to create the snapshot.

Definition at line 3111 of file [checkpoint.c](#).

References [PF_BroadcastNumber\(\)](#), [PF_RecvFile\(\)](#), [PF_SendFile\(\)](#), and [TimeWallClock\(\)](#).

Here is the call graph for this function:

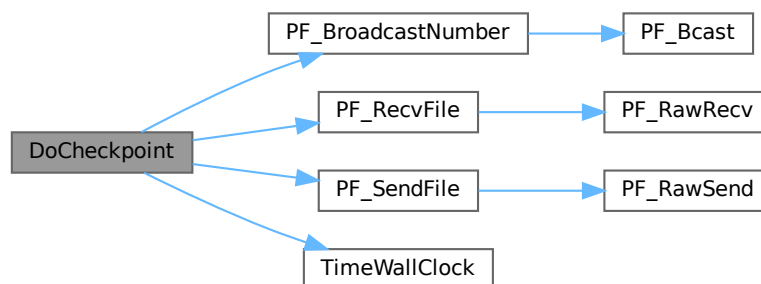

4.19.8.140 NumberMallocAddMemory()

```
void NumberMallocAddMemory (
    PHEAD0 ) [extern]
```

Definition at line 2571 of file [tools.c](#).

4.19.8.141 CacheNumberMallocAddMemory()

```
void CacheNumberMallocAddMemory (
    PHEAD0 ) [extern]
```

Definition at line 2645 of file [tools.c](#).

4.19.8.142 TermMallocAddMemory()

```
void TermMallocAddMemory (
    PHEAD0 ) [extern]
```

Definition at line 2467 of file [tools.c](#).

4.19.8.143 ExprStatus()

```
void ExprStatus (
    EXPRESSIONS e ) [extern]
```

Definition at line 66 of file [bugtool.c](#).

4.19.8.144 iniTools()

```
void iniTools (
    void ) [extern]
```

Definition at line 2203 of file [tools.c](#).

4.19.8.145 TestTerm()

```
int TestTerm (
    WORD * term ) [extern]
```

Tests the consistency of the term. Returns 0 when the term is OK. Any nonzero value is trouble. In the current version the testing isn't 100% complete. For instance, we don't check the validity of the symbols nor do we check the range of their powers. Etc. This should be extended when the need is there.

Parameters

<i>term</i>	the term to be tested
-------------	-----------------------

Definition at line [3779](#) of file [tools.c](#).

References [TestTerm\(\)](#).

Referenced by [TestTerm\(\)](#).

Here is the call graph for this function:



4.19.8.146 RunTransform()

```
int RunTransform (
    PHEAD WORD * term,
    WORD * params ) [extern]
```

Definition at line [750](#) of file [transform.c](#).

4.19.8.147 RunEncode()

```
int RunEncode (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info ) [extern]
```

Definition at line [1006](#) of file [transform.c](#).

4.19.8.148 RunDecode()

```
int RunDecode (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info ) [extern]
```

Definition at line [1193](#) of file [transform.c](#).

4.19.8.149 RunReplace()

```
int RunReplace (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info ) [extern]
```

Definition at line [1363](#) of file [transform.c](#).

4.19.8.150 RunImplode()

```
int RunImplode (
    WORD * fun,
    WORD * args ) [extern]
```

Definition at line 1841 of file [transform.c](#).

4.19.8.151 RunExplode()

```
int RunExplode (
    PHEAD WORD * fun,
    WORD * args ) [extern]
```

Definition at line 2042 of file [transform.c](#).

4.19.8.152 TestArgNum()

```
int TestArgNum (
    int n,
    int totarg,
    WORD * args ) [extern]
```

Definition at line 3307 of file [transform.c](#).

4.19.8.153 PutArgInScratch()

```
WORD PutArgInScratch (
    WORD * arg,
    UWORD * scrat ) [extern]
```

Definition at line 3376 of file [transform.c](#).

4.19.8.154 ReadRange()

```
UBYTE * ReadRange (
    UBYTE * s,
    WORD * out,
    int par ) [extern]
```

Definition at line 3412 of file [transform.c](#).

4.19.8.155 FindRange()

```
int FindRange (
    PHEAD WORD * args,
    WORD * arg1,
    WORD * arg2,
    WORD totarg ) [extern]
```

Definition at line 3572 of file [transform.c](#).

4.19.8.156 RunPermute()

```
int RunPermute (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info ) [extern]
```

Definition at line [2156](#) of file [transform.c](#).

4.19.8.157 RunReverse()

```
int RunReverse (
    PHEAD WORD * fun,
    WORD * args ) [extern]
```

Definition at line [2383](#) of file [transform.c](#).

4.19.8.158 RunCycle()

```
int RunCycle (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info ) [extern]
```

Definition at line [2559](#) of file [transform.c](#).

4.19.8.159 RunAddArg()

```
int RunAddArg (
    PHEAD WORD * fun,
    WORD * args ) [extern]
```

Definition at line [2711](#) of file [transform.c](#).

4.19.8.160 RunMulArg()

```
int RunMulArg (
    PHEAD WORD * fun,
    WORD * args ) [extern]
```

Definition at line [2800](#) of file [transform.c](#).

4.19.8.161 RunIsLyndon()

```
int RunIsLyndon (
    PHEAD WORD * fun,
    WORD * args,
    int par ) [extern]
```

Definition at line [2941](#) of file [transform.c](#).

4.19.8.162 RunToLyndon()

```
WORD RunToLyndon (  
    PHEAD WORD * fun,  
    WORD * args,  
    int par ) [extern]
```

Definition at line [3019](#) of file [transform.c](#).

4.19.8.163 RunDropArg()

```
int RunDropArg (  
    PHEAD WORD * fun,  
    WORD * args ) [extern]
```

Definition at line [3131](#) of file [transform.c](#).

4.19.8.164 RunSelectArg()

```
int RunSelectArg (  
    PHEAD WORD * fun,  
    WORD * args ) [extern]
```

Definition at line [3157](#) of file [transform.c](#).

4.19.8.165 RunDedup()

```
int RunDedup (  
    PHEAD WORD * fun,  
    WORD * args ) [extern]
```

Definition at line [2470](#) of file [transform.c](#).

4.19.8.166 RunZtoHArg()

```
int RunZtoHArg (  
    PHEAD WORD * fun,  
    WORD * args ) [extern]
```

Definition at line [3185](#) of file [transform.c](#).

4.19.8.167 RunHtoZArg()

```
int RunHtoZArg (  
    PHEAD WORD * fun,  
    WORD * args ) [extern]
```

Definition at line [3241](#) of file [transform.c](#).

4.19.8.168 NormPolyTerm()

```
int NormPolyTerm (
    PHEAD WORD * term ) [extern]
```

Definition at line 53 of file [notation.c](#).

4.19.8.169 ConvertToPoly()

```
int ConvertToPoly (
    PHEAD WORD * term,
    WORD * outterm,
    WORD * comlist,
    WORD par ) [extern]
```

Definition at line 307 of file [notation.c](#).

4.19.8.170 LocalConvertToPoly()

```
int LocalConvertToPoly (
    PHEAD WORD * term,
    WORD * outterm,
    WORD startebuf,
    WORD par ) [extern]
```

Converts a generic term to polynomial notation in which there are only symbols and brackets. During conversion there will be only symbols. Brackets are stripped. Objects that need 'translation' are put inside a special compiler buffer and represented by a symbol. The numbering of the extra symbols is down from the maximum. In principle there can be a problem when running into the already assigned ones. This uses the FindTree for searching in the global tree and then looks further in the AT.ebufnum. This allows fully parallel processing. Hence we need no locks. Cannot be used in the same module as ConvertToPoly.

Definition at line 510 of file [notation.c](#).

Referenced by [poly_factorize_expression\(\)](#).

4.19.8.171 ConvertFromPoly()

```
int ConvertFromPoly (
    PHEAD WORD * term,
    WORD * outterm,
    WORD from,
    WORD to,
    WORD offset,
    WORD par ) [extern]
```

Definition at line 660 of file [notation.c](#).

4.19.8.172 FindSubterm()

```
int FindSubterm (
    WORD * subterm ) [extern]
```

Definition at line 773 of file [notation.c](#).

4.19.8.173 FindLocalSubterm()

```
int FindLocalSubterm (
    PHEAD WORD * subterm,
    WORD startebuf ) [extern]
```

Definition at line [843](#) of file [notation.c](#).

4.19.8.174 PrintSubtermList()

```
void PrintSubtermList (
    int from,
    int to ) [extern]
```

Definition at line [897](#) of file [notation.c](#).

4.19.8.175 PrintExtraSymbol()

```
void PrintExtraSymbol (
    int num,
    WORD * terms,
    int par ) [extern]
```

Definition at line [1009](#) of file [notation.c](#).

4.19.8.176 FindSubexpression()

```
int FindSubexpression (
    WORD * subexpr ) [extern]
```

Definition at line [1096](#) of file [notation.c](#).

4.19.8.177 UpdateMaxSize()

```
void UpdateMaxSize (
    void ) [extern]
```

Definition at line [1612](#) of file [tools.c](#).

4.19.8.178 CoToPolynomial()

```
int CoToPolynomial (
    UBYTE * inp ) [extern]
```

Definition at line [5946](#) of file [compcomm.c](#).

4.19.8.179 CoFromPolynomial()

```
int CoFromPolynomial (
    UBYTE * inp ) [extern]
```

Definition at line [6021](#) of file [compcomm.c](#).

4.19.8.180 CoArgToExtraSymbol()

```
int CoArgToExtraSymbol (
    UBYTE * s ) [extern]
```

Definition at line [6047](#) of file [compcomm.c](#).

4.19.8.181 CoExtraSymbols()

```
int CoExtraSymbols (
    UBYTE * inp ) [extern]
```

Definition at line [6097](#) of file [compcomm.c](#).

4.19.8.182 GetDoParam()

```
UBYTE * GetDoParam (
    UBYTE * inp,
    WORD ** wp,
    int par ) [extern]
```

Definition at line [6228](#) of file [compcomm.c](#).

4.19.8.183 GetIfDollarFactor()

```
WORD * GetIfDollarFactor (
    UBYTE ** inp,
    WORD * w ) [extern]
```

Definition at line [6170](#) of file [compcomm.c](#).

4.19.8.184 CoDo()

```
int CoDo (
    UBYTE * inp ) [extern]
```

Definition at line [6305](#) of file [compcomm.c](#).

4.19.8.185 CoEndDo()

```
int CoEndDo (
    UBYTE * inp ) [extern]
```

Definition at line 6408 of file [compcomm.c](#).

4.19.8.186 ExtraSymFun()

```
int ExtraSymFun (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 1149 of file [notation.c](#).

4.19.8.187 PruneExtraSymbols()

```
int PruneExtraSymbols (
    WORD downto ) [extern]
```

Definition at line 1217 of file [notation.c](#).

4.19.8.188 IniFbuffer()

```
int IniFbuffer (
    WORD bufnum ) [extern]
```

Initialize a factorization cache buffer. We set the size of the rhs and boomlijst buffers immediately to their final values.

Definition at line 614 of file [comtool.c](#).

References [tree::blnce](#), [CbUf::boomlijst](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [tree::left](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [tree::parent](#), [CbUf::rhs](#), [tree::right](#), [tree::usage](#), and [tree::value](#).

4.19.8.189 GCDfunction()

```
int GCDfunction (
    PHEAD WORD * term,
    WORD level ) [extern]
```

Definition at line 609 of file [ratio.c](#).

4.19.8.190 GCDfunction3()

```
WORD * GCDfunction3 (
    PHEAD WORD * in1,
    WORD * in2 ) [extern]
```

Definition at line 1141 of file [ratio.c](#).

4.19.8.191 ReadPolyRatFun()

```
int ReadPolyRatFun (
    PHEAD WORD * term ) [extern]
```

Definition at line 2264 of file [ratio.c](#).

4.19.8.192 FromPolyRatFun()

```
int FromPolyRatFun (
    PHEAD WORD * fun,
    WORD ** numout,
    WORD ** denout ) [extern]
```

Definition at line 2383 of file [ratio.c](#).

4.19.8.193 PolyDiv()

```
WORD * PolyDiv (
    PHEAD WORD * a,
    WORD * b,
    char * text ) [extern]
```

Definition at line 2741 of file [ratio.c](#).

4.19.8.194 GCDclean()

```
void GCDclean (
    PHEAD WORD * num,
    WORD * den ) [extern]
```

Definition at line 2644 of file [ratio.c](#).

4.19.8.195 TakeSymbolContent()

```
WORD * TakeSymbolContent (
    PHEAD WORD * in,
    WORD * term ) [extern]
```

Implements part of the old ExecArg in which we take common factors from arguments with more than one term. We allow only symbols as this code is used for the polyratfun only. We have a special routine, because the generic TakeContent does too much work and speed is at a premium here. Input: in is the input expression as a sequence of terms. **Output:** term: the content return value: the contentfree expression. it is in new allocation, made by TermMalloc. (should be in a TermMalloc space?)

Definition at line 2434 of file [ratio.c](#).

References [GetModInverses\(\)](#).

Here is the call graph for this function:



4.19.8.196 GCDterms()

```
int GCDterms (
    PHEAD WORD * term1,
    WORD * term2,
    WORD * termout ) [extern]
```

Definition at line [2076](#) of file [ratio.c](#).

4.19.8.197 PutExtraSymbols()

```
WORD * PutExtraSymbols (
    PHEAD WORD * in,
    WORD startebuf,
    int * actionflag ) [extern]
```

Definition at line [1244](#) of file [ratio.c](#).

4.19.8.198 TakeExtraSymbols()

```
WORD * TakeExtraSymbols (
    PHEAD WORD * in,
    WORD startebuf ) [extern]
```

Definition at line [1273](#) of file [ratio.c](#).

4.19.8.199 MultiplyWithTerm()

```
WORD * MultiplyWithTerm (
    PHEAD WORD * in,
    WORD * term,
    WORD par ) [extern]
```

Definition at line [1312](#) of file [ratio.c](#).

4.19.8.200 TakeContent()


```
WORD * TakeContent (
    PHEAD WORD * in,
    WORD * term ) [extern]
```

Implements part of the old ExecArg in which we take common factors from arguments with more than one term. Here the input is a sequence of terms in 'in' and the answer is a content-free sequence of terms. This sequence has been allocated by the Malloc1 routine in a call to EndSort, unless the expression was already content-free. In that case the input pointer is returned. The content is returned in term. This is supposed to be a separate allocation, made by TermMalloc in the calling routine.

Definition at line [1376](#) of file [ratio.c](#).

References [GetModInverses\(\)](#).

Here is the call graph for this function:



4.19.8.201 MergeSymbolLists()

```
int MergeSymbolLists (
    PHEAD WORD * old,
    WORD * extra,
    int par ) [extern]
```

Definition at line 1808 of file [ratio.c](#).

4.19.8.202 MergeDotproductLists()

```
int MergeDotproductLists (
    PHEAD WORD * old,
    WORD * extra,
    int par ) [extern]
```

Definition at line 1927 of file [ratio.c](#).

4.19.8.203 CreateExpression()

```
WORD * CreateExpression (
    PHEAD WORD ) [extern]
```

Definition at line 2020 of file [ratio.c](#).

4.19.8.204 DIVfunction()

```
int DIVfunction (
    PHEAD WORD * term,
    WORD level,
    int par ) [extern]
```

Definition at line 2788 of file [ratio.c](#).

4.19.8.205 MULfunc()

```
WORD * MULfunc (
    PHEAD WORD * p1,
    WORD * p2 ) [extern]
```

Definition at line 2957 of file [ratio.c](#).

4.19.8.206 ConvertArgument()

```
WORD * ConvertArgument (
    PHEAD WORD * arg,
    int * type ) [extern]
```

Definition at line 3018 of file [ratio.c](#).

4.19.8.207 ExpandRat()

```
int ExpandRat (
    PHEAD WORD * fun ) [extern]
```

Definition at line 3113 of file [ratio.c](#).

4.19.8.208 InvPoly()

```
int InvPoly (
    PHEAD WORD * inpoly,
    WORD maxpow,
    WORD sym ) [extern]
```

Definition at line 3592 of file [ratio.c](#).

4.19.8.209 TestDoLoop()

```
WORD TestDoLoop (
    PHEAD WORD * lhsbuf,
    WORD level ) [extern]
```

Definition at line 2762 of file [dollar.c](#).

4.19.8.210 TestEndDoLoop()

```
WORD TestEndDoLoop (
    PHEAD WORD * lhsbuf,
    WORD level ) [extern]
```

Definition at line 2840 of file [dollar.c](#).

4.19.8.211 poly_gcd()

```
WORD * poly_gcd (  
    PHEAD WORD * a,  
    WORD * b,  
    WORD fit ) [extern]
```

Polynomial gcd

4.19.9 Description

This method calculates the greatest common divisor of two polynomials, given by two zero-terminated Form-style term lists.


4.19.10 Notes

- The result is written at newly allocated memory
- Called from [ratio.c](#)
- Calls `polygcd::gcd`

Definition at line [124](#) of file [polywrap.cc](#).

References [poly_determine_modulus\(\)](#).

Here is the call graph for this function:



4.19.10.1 poly_div()

```
WORD * poly_div (  
    PHEAD WORD * a,  
    WORD * b,  
    WORD fit ) [extern]
```

Definition at line [435](#) of file [polywrap.cc](#).

4.19.10.2 poly_rem()

```
WORD * poly_rem (
    PHEAD WORD * a,
    WORD * b,
    WORD fit ) [extern]
```

Definition at line [463](#) of file [polywrap.cc](#).

4.19.10.3 poly_inverse()

```
WORD * poly_inverse (
    PHEAD WORD * arga,
    WORD * argb ) [extern]
```

Definition at line [1743](#) of file [polywrap.cc](#).

4.19.10.4 poly_mul()

```
WORD * poly_mul (
    PHEAD WORD * a,
    WORD * b ) [extern]
```

Definition at line [1948](#) of file [polywrap.cc](#).

4.19.10.5 poly_ratfun_add()

```
WORD * poly_ratfun_add (
    PHEAD WORD * t1,
    WORD * t2 ) [extern]
```

Addition of PolyRatFuns

4.19.11 Description

This method gets two pointers to polyratfuns with up to two arguments each and calculates the sum.

4.19.14 Notes


- The result overwrites the original term
- Called from [proces.c](#)
- Calls `poly::operators` and `polygcd::gcd`

Definition at line 769 of file [polywrap.cc](#).

References [poly_determine_modulus\(\)](#), [poly_ratfun_read\(\)](#), and [poly_sort\(\)](#).

Referenced by [PolyFunMul\(\)](#), and [PrepPoly\(\)](#).

Here is the call graph for this function:

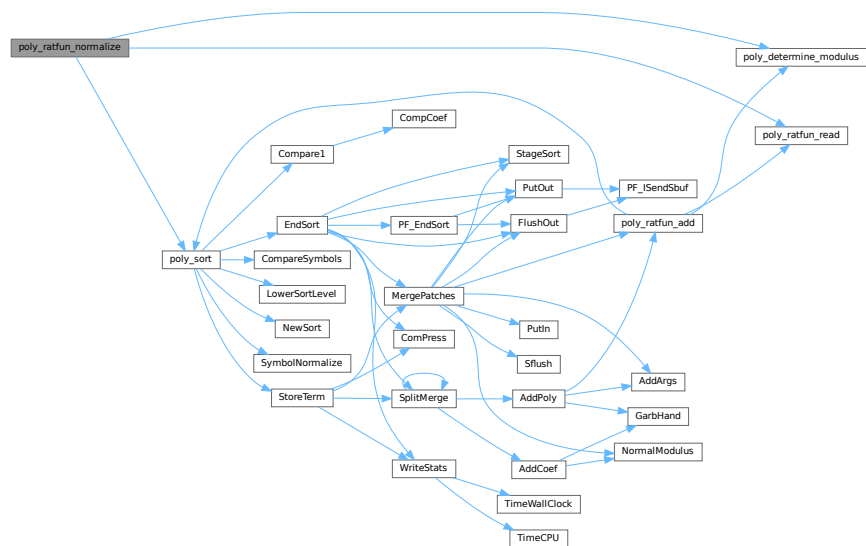

4.19.14.1 poly_factorize_argument()

```

int poly_factorize_argument (
    PHEAD WORD * argin,
    WORD * argout ) [extern]
  
```

Factorization of function arguments

4.19.15 Description

This method factorizes the Form-style argument `argin`.


4.19.16 Notes

- The result is written at argout
- Called from [argument.c](#)
- Calls `poly_factorize`

Definition at line 1112 of file [polywrap.cc](#).

References [poly_factorize\(\)](#).

Here is the call graph for this function:



4.19.16.1 `poly_factorize_dollar()`

```
WORD * poly_factorize_dollar (
    PHEAD WORD * argin ) [extern]
```

Factorization of dollar variables

4.19.17 Description

This method factorizes a dollar variable.


4.19.18 Notes

- The result is written at newly allocated memory.
- Called from [dollar.c](#)
- Calls `poly_factorize`

Definition at line 1146 of file [polywrap.cc](#).

References [poly_factorize\(\)](#).

Here is the call graph for this function:



4.19.18.1 poly_factorize_expression()

```
int poly_factorize_expression (
    EXPRESSIONS expr ) [extern]
```

Factorization of expressions

4.19.19 Description

This method factorizes an expression.

4.19.20 Notes


- The result overwrites the input expression
- Called from [proces.c](#)
- Calls `polyfact::factorize`

Definition at line 1178 of file [polywrap.cc](#).

References [EndSort\(\)](#), [Generator\(\)](#), [File::handle](#), [LocalConvertToPoly\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), and [poly_determine_modulus\(\)](#).

Referenced by [PF_Processor\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:

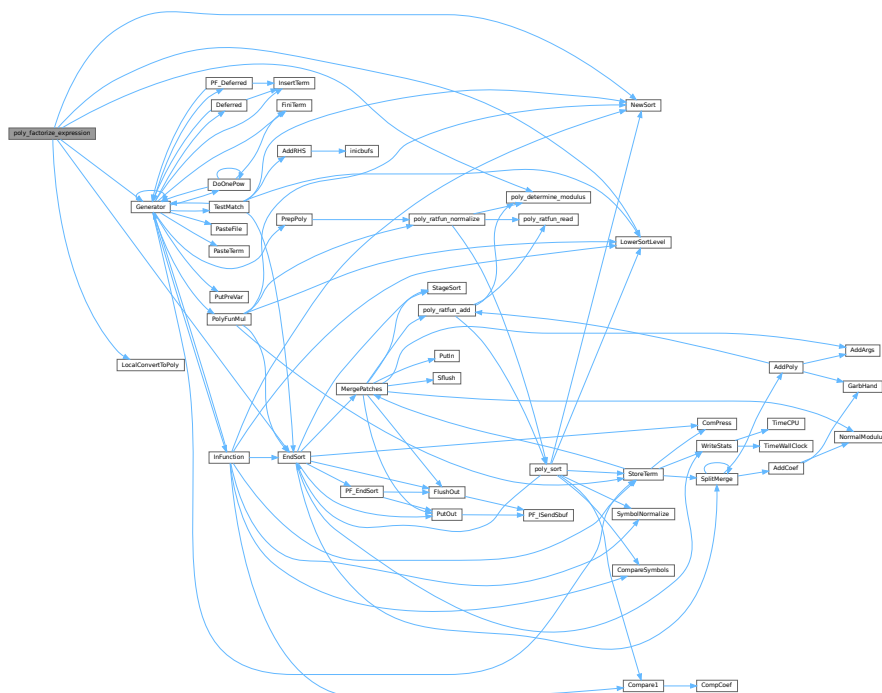

4.19.20.1 poly_unfactorize_expression()

```
int poly_unfactorize_expression (
    EXPRESSIONS expr ) [extern]
```

Unfactorization of expressions

4.19.21 Description

This method expands a factorized expression.

4.19.22 Notes


- The result overwrites the input expression
- Called from [proces.c](#)

Definition at line 1535 of file [polywrap.cc](#).

References [EndSort\(\)](#), [Generator\(\)](#), [FiLe::handle](#), [LowerSortLevel\(\)](#), and [NewSort\(\)](#).

Referenced by [PF_Processor\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:

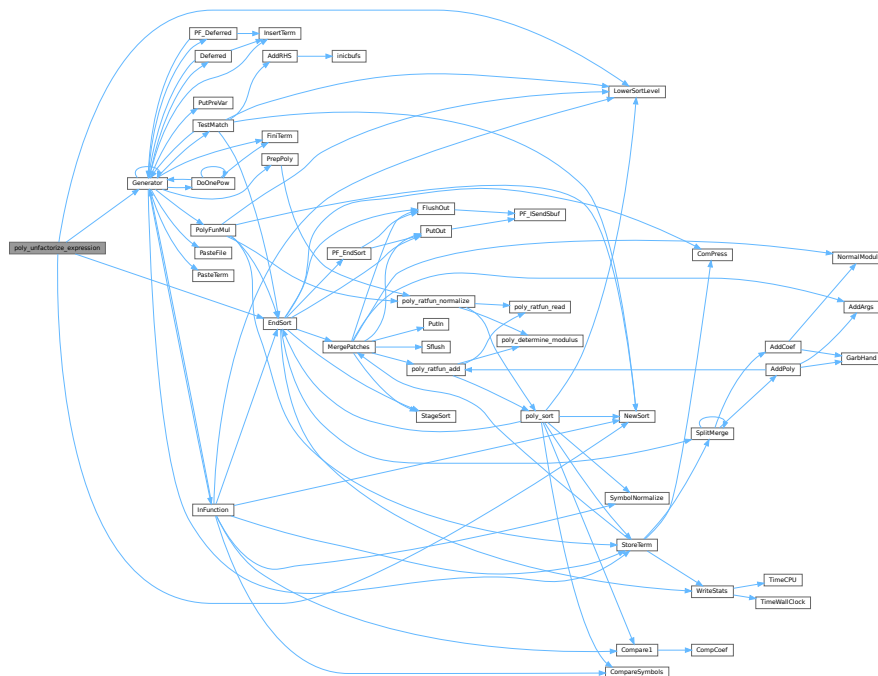

4.19.22.1 poly_free_poly_vars()

```
void poly_free_poly_vars (
    PHEAD const char * text ) [extern]
```

Definition at line 2014 of file [polywrap.cc](#).

4.19.22.2 optimize_print_code()

```
void optimize_print_code (
    int print_expr ) [extern]
```

Print optimized code

4.19.23 Description

This method prints the optimized code via "PrintExtraSymbol". Depending on the flag, the original expression is printed (for "Print") or not (for "#Optimize / #write "O").

Definition at line 4524 of file [optimize.cc](#).

Referenced by [Optimize\(\)](#).

4.19.23.1 DoPreAdd()

```
int DoPreAdd (
    UBYTE * s ) [extern]
```

Definition at line 1067 of file [dict.c](#).

4.19.23.2 DoPreUseDictionary()

```
int DoPreUseDictionary (
    UBYTE * s ) [extern]
```

Definition at line 1022 of file [dict.c](#).

4.19.23.3 DoPreCloseDictionary()

```
int DoPreCloseDictionary (
    UBYTE * s ) [extern]
```

Definition at line 998 of file [dict.c](#).

4.19.23.4 DoPreOpenDictionary()

```
int DoPreOpenDictionary (
    UBYTE * s ) [extern]
```

Definition at line 959 of file [dict.c](#).

4.19.23.5 RemoveDictionary()

```
void RemoveDictionary (
    DICTIONARY * dict ) [extern]
```

Definition at line 902 of file [dict.c](#).

4.19.23.6 UnSetDictionary()

```
void UnSetDictionary (
    void ) [extern]
```

Definition at line 883 of file [dict.c](#).

4.19.23.7 SetDictionaryOptions()

```
int SetDictionaryOptions (
    UBYTE * options ) [extern]
```

Definition at line 790 of file [dict.c](#).

4.19.23.8 AddToDictionary()

```
int AddToDictionary (
    DICTIONARY * dict,
    UBYTE * left,
    UBYTE * right ) [extern]
```

Definition at line 491 of file [dict.c](#).

4.19.23.9 AddDictionary()

```
int AddDictionary (
    UBYTE * name ) [extern]
```

Definition at line 449 of file [dict.c](#).

4.19.23.10 FindDictionary()

```
int FindDictionary (
    UBYTE * name ) [extern]
```

Definition at line 434 of file [dict.c](#).

4.19.23.11 IsExponentSign()

```
UBYTE * IsExponentSign (
    void ) [extern]
```

Definition at line 238 of file [dict.c](#).

4.19.23.12 IsMultiplySign()

```
UBYTE * IsMultiplySign (
    void ) [extern]
```

Definition at line 218 of file [dict.c](#).

4.19.23.13 TransformRational()

```
void TransformRational (
    UWORD * a,
    WORD na ) [extern]
```

Definition at line 71 of file [dict.c](#).

4.19.23.14 WriteDictionary()

```
void WriteDictionary (
    DICTIONARY * dict ) [extern]
```

Definition at line 1307 of file [sch.c](#).

4.19.23.15 ShrinkDictionary()

```
void ShrinkDictionary (
    DICTIONARY * dict ) [extern]
```

Definition at line 945 of file [dict.c](#).

4.19.23.16 MultiplyToLine()

```
void MultiplyToLine (
    void ) [extern]
```

Definition at line 671 of file [sch.c](#).

4.19.23.17 FindSymbol()

```
UBYTE * FindSymbol (
    WORD num ) [extern]
```

Definition at line 258 of file [dict.c](#).

4.19.23.18 FindVector()

```
UBYTE * FindVector (
    WORD num ) [extern]
```

Definition at line 279 of file [dict.c](#).

4.19.23.19 FindIndex()

```
UBYTE * FindIndex (
    WORD num ) [extern]
```

Definition at line 301 of file [dict.c](#).

4.19.23.20 FindFunction()

```
UBYTE * FindFunction (
    WORD num ) [extern]
```

Definition at line 323 of file [dict.c](#).

4.19.23.21 FindFunWithArgs()

```
UBYTE * FindFunWithArgs (
    WORD * t ) [extern]
```

Definition at line 345 of file [dict.c](#).

4.19.23.22 FindExtraSymbol()

```
UBYTE * FindExtraSymbol (
    WORD num ) [extern]
```

Definition at line 377 of file [dict.c](#).

4.19.23.23 DictToBytes()

```
LONG DictToBytes (
    DICTIONARY * dict,
    UBYTE * buf ) [extern]
```

Definition at line 1119 of file [dict.c](#).

4.19.23.24 DictFromBytes()

```
DICTIONARY * DictFromBytes (
    UBYTE * buf ) [extern]
```

Definition at line 1152 of file [dict.c](#).

4.19.23.25 CoCreateSpectator()

```
int CoCreateSpectator (
    UBYTE * inp ) [extern]
```

Definition at line 89 of file [spectator.c](#).

4.19.23.26 CoToSpectator()

```
int CoToSpectator (
    UBYTE * inp ) [extern]
```

Definition at line 181 of file [spectator.c](#).

4.19.23.27 CoRemoveSpectator()

```
int CoRemoveSpectator (
    UBYTE * inp ) [extern]
```

Definition at line 233 of file [spectator.c](#).

4.19.23.28 CoEmptySpectator()

```
int CoEmptySpectator (
    UBYTE * inp ) [extern]
```

Definition at line 293 of file [spectator.c](#).

4.19.23.29 CoCopySpectator()

```
int CoCopySpectator (
    UBYTE * inp ) [extern]
```

Definition at line 459 of file [spectator.c](#).

4.19.23.30 PutInSpectator()

```
int PutInSpectator (
    WORD * term,
    WORD specnum ) [extern]
```

Definition at line 345 of file [spectator.c](#).

4.19.23.31 ClearSpectators()

```
void ClearSpectators (
    WORD par ) [extern]
```

Definition at line 675 of file [spectator.c](#).

4.19.23.32 GetFromSpectator()

```
WORD GetFromSpectator (
    WORD * term,
    WORD specnum ) [extern]
```

Definition at line 601 of file [spectator.c](#).

4.19.23.33 FlushSpectators()

```
void FlushSpectators (
    void ) [extern]
```

Definition at line 402 of file [spectator.c](#).

4.19.23.34 ReadFromScratch()

```
int ReadFromScratch (
    FILEHANDLE * fi,
    POSITION * pos,
    UBYTE * buffer,
    POSITION * length ) [extern]
```

Definition at line 272 of file [store.c](#).

4.19.23.35 AddToScratch()

```
int AddToScratch (
    FILEHANDLE * fi,
    POSITION * pos,
    UBYTE * buffer,
    POSITION * length,
    int withflush ) [extern]
```

Definition at line 299 of file [store.c](#).

4.19.23.36 DoPreAppendPath()

```
int DoPreAppendPath (
    UBYTE * s ) [extern]
```

Appends the given path (absolute or relative to the current file directory) to the FORM path.

Syntax: `#appendpath <path>`

Definition at line 7231 of file [pre.c](#).

4.19.23.37 DoPrePrependPath()

```
int DoPrePrependPath (
    UBYTE * s ) [extern]
```

Prepends the given path (absolute or relative to the current file directory) to the FORM path.

Syntax: #prependpath <path>

Definition at line 7248 of file [pre.c](#).

4.19.23.38 DoSwitch()

```
int DoSwitch (
    PHEAD WORD * term,
    WORD * lhs ) [extern]
```

Definition at line 1070 of file [if.c](#).

4.19.23.39 DoEndSwitch()

```
int DoEndSwitch (
    PHEAD WORD * term,
    WORD * lhs ) [extern]
```

Definition at line 1086 of file [if.c](#).

4.19.23.40 FindCase()

```
SWITCHTABLE * FindCase (
    WORD nswitch,
    WORD ncase ) [extern]
```

Definition at line 1097 of file [if.c](#).

4.19.23.41 SwitchSplitMergeRec()

```
void SwitchSplitMergeRec (
    SWITCHTABLE * array,
    WORD num,
    SWITCHTABLE * auxarray ) [extern]
```

Definition at line 1184 of file [if.c](#).

4.19.23.42 SwitchSplitMerge()

```
void SwitchSplitMerge (
    SWITCHTABLE * array,
    WORD num ) [extern]
```

Definition at line 1213 of file [if.c](#).

4.19.23.43 DoubleSwitchBuffers()

```
int DoubleSwitchBuffers (
    void ) [extern]
```

Definition at line 1135 of file [if.c](#).

4.19.23.44 DistrN()

```
int DistrN (
    int n,
    int * cpl,
    int ncpl,
    int * scratch ) [extern]
```

Definition at line 3965 of file [tools.c](#).

4.19.23.45 DoNamespace()

```
int DoNamespace (
    UBYTE * s ) [extern]
```

Definition at line 7312 of file [pre.c](#).

4.19.23.46 DoEndNamespace()

```
int DoEndNamespace (
    UBYTE * s ) [extern]
```

Definition at line 7360 of file [pre.c](#).

4.19.23.47 DoUse()

```
int DoUse (
    UBYTE * s ) [extern]
```

Definition at line 7575 of file [pre.c](#).

4.19.23.48 SkipName()

```
UBYTE * SkipName (
    UBYTE * s ) [extern]
```

Definition at line 7383 of file [pre.c](#).

4.19.23.49 ConstructName()

```
UBYTE * ConstructName (
    UBYTE * s,
    UBYTE type ) [extern]
```

Definition at line 7483 of file [pre.c](#).

4.19.23.50 DoSetUserFlag()

```
int DoSetUserFlag (
    UBYTE * s ) [extern]
```

Definition at line 7740 of file [pre.c](#).

4.19.23.51 DoClearUserFlag()

```
int DoClearUserFlag (
    UBYTE * s ) [extern]
```

Definition at line 7730 of file [pre.c](#).

4.19.23.52 CreateVertex()

```
VERTEX * CreateVertex (
    MODEL * m )
```

Definition at line 76 of file [model.c](#).

4.19.23.53 ReadParticle()

```
UBYTE * ReadParticle (
    UBYTE * s,
    VERTEX * v,
    MODEL * m,
    int par )
```

Definition at line 106 of file [model.c](#).

4.19.23.54 CoModel()

```
int CoModel (
    UBYTE * s )
```

Definition at line 149 of file [model.c](#).

4.19.23.55 CoParticle()

```
int CoParticle (
    UBYTE * s )
```

Definition at line 224 of file [model.c](#).

4.19.23.56 CoVertex()

```
int CoVertex (
    UBYTE * s )
```

Definition at line 306 of file [model.c](#).

4.19.23.57 CoEndModel()

```
int CoEndModel (
    UBYTE * s )
```

Definition at line 409 of file [model.c](#).

4.19.23.58 LoadModel()

```
int LoadModel (
    MODEL * m )
```

Definition at line 57 of file [diawrap.cc](#).

4.19.23.59 CoSetUserFlag()

```
int CoSetUserFlag (
    UBYTE * s )
```

Definition at line 7405 of file [compcomm.c](#).

4.19.23.60 CoClearUserFlag()

```
int CoClearUserFlag (
    UBYTE * s )
```

Definition at line 7433 of file [compcomm.c](#).

4.19.23.61 CoCreateAllLoops()

```
int CoCreateAllLoops (
    UBYTE * s )
```

Definition at line 7470 of file [compcomm.c](#).

4.19.23.62 CoCreateAllPaths()

```
int CoCreateAllPaths (
    UBYTE * s )
```

Definition at line [7590](#) of file [compcomm.c](#).

4.19.23.63 CoCreateAll()

```
int CoCreateAll (
    UBYTE * s )
```

Definition at line [7718](#) of file [compcomm.c](#).

4.19.23.64 AllLoops()

```
int AllLoops (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [650](#) of file [lus.c](#).

4.19.23.65 StartLoops()

```
LONG StartLoops (
    PHEAD WORD * term,
    WORD level,
    LONG vert,
    WORD nvert,
    WORD * arglist,
    WORD nargs,
    WORD * loop,
    WORD nloop )
```

Definition at line [894](#) of file [lus.c](#).

4.19.23.66 GenLoops()

```
LONG GenLoops (
    PHEAD WORD * term,
    WORD level,
    LONG vert,
    WORD nvert,
    WORD * arglist,
    WORD nargs,
    WORD * loop,
    WORD nloop )
```

Definition at line [980](#) of file [lus.c](#).

4.19.23.67 LoopOutput()

```
void LoopOutput (
    PHEAD WORD * term,
    WORD level,
    WORD * loop,
    WORD nloop )
```

Definition at line [1059](#) of file [lus.c](#).

4.19.23.68 AllPaths()

```
int AllPaths (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [1123](#) of file [lus.c](#).

4.19.23.69 GenPaths()

```
LONG GenPaths (
    PHEAD WORD * term,
    WORD level,
    LONG vert,
    WORD nvert,
    WORD * arglist,
    WORD nargs,
    WORD * path,
    WORD npath )
```

Definition at line [1413](#) of file [lus.c](#).

4.19.23.70 PathOutput()

```
void PathOutput (
    PHEAD WORD * term,
    WORD level,
    WORD * path,
    WORD npath )
```

Definition at line [1486](#) of file [lus.c](#).

4.20 declare.h

[Go to the documentation of this file.](#)

```

00001 #ifndef __FDECLARE__
00002 #define __FDECLARE__
00003
00009 /* #[ License : */
00010 /*
00011 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 * When using this file you are requested to refer to the publication
00013 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 * This is considered a matter of courtesy as the development was paid
00015 * for by FOM the Dutch physics granting agency and we would like to
00016 * be able to track its scientific use to convince FOM of its value
00017 * for the community.
00018 *
00019 * This file is part of FORM.
00020 *
00021 * FORM is free software: you can redistribute it and/or modify it under the
00022 * terms of the GNU General Public License as published by the Free Software
00023 * Foundation, either version 3 of the License, or (at your option) any later
00024 * version.
00025 *
00026 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 * details.
00030 *
00031 * You should have received a copy of the GNU General Public License along
00032 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #] License : */
00035
00036 /*
00037 #[ Macro's :
00038 */
00039
00040 #define MaX(x,y) ((x) > (y) ? (x) : (y))
00041 #define MiN(x,y) ((x) < (y) ? (x) : (y))
00042 #define ABS(x) ( (x) < 0 ? -(x) : (x) )
00043 #define SGN(x) ( (x) > 0 ? 1 : (x) < 0 ? -1 : 0 )
00044 #define REDLENG(x) (((x)<0)?((x)+1):((x)-1))/2)
00045 #define INCLENG(x) (((x)<0)?((x)*2)-1:((x)*2)+1))
00046 #define GETCOEF(x,y) x += *x;y = x[-1];x -= ABS(y);y=REDLENG(y)
00047 #define GETSTOP(x,y) y=x+(*x)-1;y -= ABS(*y)-1
00048 #define StuffAdd(x,y) ((x)<0?-1:1)* (y)+((y)<0?-1:1)* (x))
00049
00050 #define EXCHN(t1,t2,n) { WORD a,i; for(i=0;i<n;i++){a=t1[i];t1[i]=t2[i];t2[i]=a;} }
00051 #define EXCH(x,y) { WORD a = (x); (x) = (y); (y) = a; }
00052
00053 #define TOKENTOLINE(x,y) if ( AC.OutputSpaces == NOSPACEFORMAT ) { \
00054     TokenToLine((UBYTE *) (y)); } else { TokenToLine((UBYTE *) (x)); }
00055
00056 #define UngetFromStream(stream,c) ((stream)->nextchar[(stream)->isnextchar++]=c)
00057 #ifdef WITHRETURN
00058 #define AddLineFeed(s,n) { (s)[(n)++] = CARRIAGERETURN; (s)[(n)++] = LINEFEED; }
00059 #else
00060 #define AddLineFeed(s,n) { (s)[(n)++] = LINEFEED; }
00061 #endif
00062 #define TryRecover(x) Terminate(-1)
00063 #define UngetChar(c) { pushbackchar = c; }
00064 #define ParseNumber(x,s) { (x)=0;while(*(s)>='0'&&*(s)<='9')(x)=10*(x)+*(s)++ -'0';}
00065 #define ParseSign(sgn,s) { (sgn)=0;while(*(s)=='-'||*(s)=='+'){ \
00066     if ( *(s)++ == '-' ) sgn ^= 1;}}
00067 #define ParseSignedNumber(x,s) { int sgn; ParseSign(sgn,s)\
00068     ParseNumber(x,s) if ( sgn ) x = -x; }
00069
00070 /* (n) is necessary here, since the macro is sometimes passed dereferenced pointers for n */
00071 #define NCOPY(s,t,n) { while ( (n)-- > 0 ) { *s++ = *t++; } }
00072 /*#define NCOPY(s,t,n) { memcpy(s,t,n*sizeof(WORD)); s+=n; t+=n; n = -1; }*/
00073 #define NCOPYI(s,t,n) { while ( (n)-- > 0 ) { *s++ = *t++; } }
00074 #define NCOPYB(s,t,n) { while ( (n)-- > 0 ) { *s++ = *t++; } }
00075 #define NCOPYI32(s,t,n) { while ( (n)-- > 0 ) { *s++ = *t++; } }
00076 #define WCOPY(s,t,n) { int nn=n; WORD *ss=(WORD *)s, *tt=(WORD *)t; while ( (nn)-- > 0 ) { *ss++ =
    *tt++; } }
00077
00078 #define NeedNumber(x,s,err) { int sgn = 1;
00079     while ( *s == ' ' || *s == '\t' || *s == '-' || *s == '+' ) {
00080         if ( *s == '-' ) {sgn = -sgn;} s++; }
00081         if ( chartype[*s] != 1 ) goto err;
00082         ParseNumber(x,s)
00083         if ( sgn < 0 ) {(x) = -(x);} while ( *s == ' ' || *s == '\t' ) s++; \
00084     }
00085 #define SKIPBLANKS(s) { while ( *(s) == ' ' || *(s) == '\t' ) (s)++; }
00086 #define FLUSHCONSOLE if ( AP.InOutBuf > 0 ) CharOut(LINEFEED)

```

```

00087
00088 #define SKIPBRA1(s) { int lev1=0; s++; while(*s) { if(*s=='{') {lev1++;} \
00089 else {if(*s=='}' && --lev1<0) {break;}} s++;} }
00090 #define SKIPBRA2(s) { int lev2=0; s++; while(*s) { if(*s=='{') {lev2++;} \
00091 else {if(*s=='}' && --lev2<0) {break;}} \
00092 else {if(*s=='[') {SKIPBRA1(s)}} s++;} }
00093 #define SKIPBRA3(s) { int lev3=0; s++; while(*s) { if(*s=='(') {lev3++;} \
00094 else {if(*s==')' && --lev3<0) {break;}} \
00095 else {if(*s=='{') {SKIPBRA2(s)} \
00096 else {if(*s=='[') {SKIPBRA1(s)}}} s++;} }
00097 #define SKIPBRA4(s) { int lev4=0; s++; while(*s) { if(*s=='(') {lev4++;} \
00098 else {if(*s==')' && --lev4<0) {break;}} \
00099 else {if(*s=='{') {SKIPBRA1(s)}} s++;} }
00100 #define SKIPBRA5(s) { int lev5=0; s++; while(*s) { if(*s=='{') {lev5++;} \
00101 else {if(*s=='}' && --lev5<0) {break;}} \
00102 else {if(*s=='(') {SKIPBRA4(s)} \
00103 else {if(*s=='[') {SKIPBRA1(s)}}} s++;} }
00104
00105 /*
00106 #define CYCLE1(a,i) {WORD iX,jX; iX=*a; for(jX=1;jX<i;jX++)a[jX-1]=a[jX]; a[i-1]=iX;}
00107 */
00108 #define CYCLE1(t,a,i) {t iX=*a; WORD jX; for(jX=1;jX<i;jX++)a[jX-1]=a[jX]; a[i-1]=iX;}
00109
00110 #define AddToCB(c,wx) if(c->Pointer>=c->Top) \
00111 {DoubleCbuffer(c-cbuf,c->Pointer,21);} \
00112 *(c->Pointer)++ = wx;
00113
00114 #define EXCHINOUT { FILEHANDLE *ffFi = AR.outfile; \
00115 AR.outfile = AR.infile; AR.infile = ffFi; }
00116 #define BACKINOUT { FILEHANDLE *ffFi = AR.outfile; POSITION posi; \
00117 AR.outfile = AR.infile; AR.infile = ffFi; \
00118 SetEndScratch(AR.infile,&posi); }
00119
00120 #define CopyArg(to,from) { if ( *from > 0 ) { int ica = *from; NCOPY(to,from,ica) } \
00121 else if ( *from <= -FUNCTION ) *to++ = *from++; \
00122 else { *to++ = *from++; *to++ = *from++; } }
00123
00124 #if ARGHEAD > 2
00125 #define FILLARG(w) { int i = ARGHEAD-2; while ( --i >= 0 ) *w++ = 0; }
00126 #define COPYARG(w,t) { int i = ARGHEAD-2; while ( --i >= 0 ) *w++ = *t++; }
00127 #define ZEROARG(w) { int i; for ( i = 2; i < ARGHEAD; i++ ) w[i] = 0; }
00128 #else
00129 #define FILLARG(w)
00130 #define COPYARG(w,t)
00131 #define ZEROARG(w)
00132 #endif
00133
00134 #if FUNHEAD > 2
00135 #define FILLFUN(w) { *w++ = 0; FILLFUN3(w) }
00136 #define COPYFUN(w,t) { *w++ = *t++; COPYFUN3(w,t) }
00137 #else
00138 #define FILLFUN(w)
00139 #define COPYFUN(w,t)
00140 #endif
00141
00142 #if FUNHEAD > 3
00143 #define FILLFUN3(w) { int ie = FUNHEAD-3; while ( --ie >= 0 ) *w++ = 0; }
00144 #define COPYFUN3(w,t) { int ie = FUNHEAD-3; while ( --ie >= 0 ) *w++ = *t++; }
00145 #else
00146 #define COPYFUN3(w,t)
00147 #define FILLFUN3(w)
00148 #endif
00149
00150 #if SUBEXPSIZE > 5
00151 #define FILLSUB(w) { int ie = SUBEXPSIZE-5; while ( --ie >= 0 ) *w++ = 0; }
00152 #define COPYSUB(w,ww) { int ie = SUBEXPSIZE-5; while ( --ie >= 0 ) *w++ = *ww++; }
00153 #else
00154 #define FILLSUB(w)
00155 #define COPYSUB(w,ww)
00156 #endif
00157
00158 #if EXPRHEAD > 4
00159 #define FILLEXPR(w) { int ie = EXPRHEAD-4; while ( --ie >= 0 ) *w++ = 0; }
00160 #else
00161 #define FILLEXPR(w)
00162 #endif
00163
00164 #define NEXTARG(x) if(*x>0) x += *x; else if(*x <= -FUNCTION)x++; else x += 2;
00165 #define COPY1ARG(sl,t1) { int ica; if ( (ica==t1) > 0 ) { NCOPY(sl,t1,ica) } \
00166 else if(*t1<=-FUNCTION){*sl++=*t1++;} else{*sl++=*t1++;*sl++=*t1++;} }
00167
00175 #define ZeroFillRange(w,begin,end) do { \
00176 int tmp_i; \
00177 for ( tmp_i = begin; tmp_i < end; tmp_i++ ) { (w)[tmp_i] = 0; } \
00178 } while (0)
00179
00180 #define TABLESIZE(a,b) (((WORD)sizeof(a))/((WORD)sizeof(b)))

```

```

00181 #define WORDDIFF(x,y) (WORD)(x-y)
00182 #define wsizeof(a) ((WORD)sizeof(a))
00183 #define VARNAME(type,num) (AC.varnames->namebuffer+type[num].name)
00184 #define DOLLARNAME(type,num) (AC.dollarnames->namebuffer+type[num].name)
00185 #define EXPRNAME(num) (AC.exprnames->namebuffer+Expressions[num].name)
00186
00187 #define PREV(x) prevorder?prevorder:x
00188
00189 #define Terminate(x) do { TerminateImpl(x, __FILE__, __LINE__, __FUNCTION__); } while(0)
00190 #define SETERROR(x) { Terminate(-1); return(-1); }
00191
00192 /* use this macro to avoid the unused parameter warning */
00193 #define DUMMYUSE(x) (void)(x);
00194
00195 #ifdef _FILE_OFFSET_BITS
00196 #if _FILE_OFFSET_BITS==64
00197 /*:[19mar2004 mt]*/
00198
00199 #define ADDPOS(pp,x) (pp).p1 = ((pp).p1+(off_t)(x))
00200 #define SETBASELENGTH(ss,x) (ss).p1 = (off_t)(x)
00201 #define SETBASEPOSITION(pp,x) (pp).p1 = (off_t)(x)
00202 #define ISEQUALPOSINC(pp1,pp2,x) ( (pp1).p1 == ((pp2).p1+(off_t)(x)) )
00203 #define ISGEPOSINC(pp1,pp2,x) ( (pp1).p1 >= ((pp2).p1+(off_t)(x)) )
00204 #define DIVPOS(pp,n) ( (pp).p1/(off_t)(n) )
00205 #define MULPOS(pp,n) (pp).p1 *= (off_t)(n)
00206
00207 #else
00208
00209 #define ADDPOS(pp,x) (pp).p1 = ((pp).p1+(x))
00210 #define SETBASELENGTH(ss,x) (ss).p1 = (x)
00211 #define SETBASEPOSITION(pp,x) (pp).p1 = (x)
00212 #define ISEQUALPOSINC(pp1,pp2,x) ( (pp1).p1 == ((pp2).p1+(LONG)(x)) )
00213 #define ISGEPOSINC(pp1,pp2,x) ( (pp1).p1 >= ((pp2).p1+(LONG)(x)) )
00214 #define DIVPOS(pp,n) ( (pp).p1/(n) )
00215 #define MULPOS(pp,n) (pp).p1 *= (n)
00216 #endif
00217 #else
00218
00219 #define ADDPOS(pp,x) (pp).p1 = ((pp).p1+(LONG)(x))
00220 #define SETBASELENGTH(ss,x) (ss).p1 = (LONG)(x)
00221 #define SETBASEPOSITION(pp,x) (pp).p1 = (LONG)(x)
00222 #define ISEQUALPOSINC(pp1,pp2,x) ( (pp1).p1 == ((pp2).p1+(LONG)(x)) )
00223 #define ISGEPOSINC(pp1,pp2,x) ( (pp1).p1 >= ((pp2).p1+(LONG)(x)) )
00224 #define DIVPOS(pp,n) ( (pp).p1/(LONG)(n) )
00225 #define MULPOS(pp,n) (pp).p1 *= (LONG)(n)
00226
00227 #endif
00228 #define DIFPOS(ss,pp1,pp2) (ss).p1 = ((pp1).p1-(pp2).p1)
00229 #define DIFBASE(pp1,pp2) ((pp1).p1-(pp2).p1)
00230 #define ADD2POS(pp1,pp2) (pp1).p1 += (pp2).p1
00231 #define PUTZERO(pp) (pp).p1 = 0
00232 #define BASEPOSITION(pp) ((pp).p1)
00233 #define SETSTARTPOS(pp) (pp).p1 = -2
00234 #define NOTSTARTPOS(pp) ( (pp).p1 > -2 )
00235 #define ISMINPOS(pp) ( (pp).p1 == -1 )
00236 #define ISEQUALPOS(pp1,pp2) ( (pp1).p1 == (pp2).p1 )
00237 #define ISNOTEQUALPOS(pp1,pp2) ( (pp1).p1 != (pp2).p1 )
00238 #define ISLESSPOS(pp1,pp2) ( (pp1).p1 < (pp2).p1 )
00239 #define ISGEPOS(pp1,pp2) ( (pp1).p1 >= (pp2).p1 )
00240 #define ISNOTZEROPOS(pp) ( (pp).p1 != 0 )
00241 #define ISZEROPOS(pp) ( (pp).p1 == 0 )
00242 #define ISPOSPOS(pp) ( (pp).p1 > 0 )
00243 #define ISNEGPOS(pp) ( (pp).p1 < 0 )
00244 extern void TELLFILE(int,POSITION *);
00245
00246 #define TOLONG(x) ((LONG)(x))
00247
00248 #define Add2Com(x) { WORD cod[2]; cod[0] = x; cod[1] = 2; AddNtoL(2,cod); }
00249 #define Add3Com(x1,x2) { WORD cod[3]; cod[0] = x1; cod[1] = 3; cod[2] = x2; AddNtoL(3,cod); }
00250 #define Add4Com(x1,x2,x3) { WORD cod[4]; cod[0] = x1; cod[1] = 4; \
00251     cod[2] = x2; cod[3] = x3; AddNtoL(4,cod); }
00252 #define Add5Com(x1,x2,x3,x4) { WORD cod[5]; cod[0] = x1; cod[1] = 5; \
00253     cod[2] = x2; cod[3] = x3; cod[4] = x4; AddNtoL(5,cod); }
00254
00255 /*
00256     The temporary variable ppp is to avoid a compiler warning about strict aliasing
00257 */
00258 #define WantAddPointers(x) while((AT.pWorkPointer+(x))>AR.pWorkSize){WORD ***ppp=&AT.pWorkSpace;\
00259     ExpandBuffer((void **)ppp,&AR.pWorkSize,(int)(sizeof(WORD *)));}
00260 #define WantAddLongs(x) while((AT.lWorkPointer+(x))>AR.lWorkSize){LONG **ppp=&AT.lWorkSpace;\
00261     ExpandBuffer((void **)ppp,&AR.lWorkSize,sizeof(LONG));}
00262 #define WantAddPositions(x) while((AT.posWorkPointer+(x))>AR.posWorkSize){POSITION
00263     **ppp=&AT.posWorkSpace;\
00264     ExpandBuffer((void **)ppp,&AR.posWorkSize,sizeof(POSITION));}
00265
00266 /* inline in form3.h (or config.h). */
00267 #define FORM_INLINE inline

```

```

00267
00268 /*
00269     Macro's for memory management. This can be done by routines, but that
00270     would be slower. Inline routines could do this, but we don't want to
00271     leave this to the friendliness of the compiler(s).
00272     The routines can be found in the file tools.c
00273 */
00274 #define MEMORYMACROS
00275
00276 #ifndef MEMORYMACROS
00277
00278 #define TermMalloc(x) ( (AT.TermMemTop <= 0) ? TermMallocAddMemory(BHEAD0),
AT.TermMemHeap[--AT.TermMemTop]: AT.TermMemHeap[--AT.TermMemTop] )
00279 #define NumberMalloc(x) ( (AT.NumberMemTop <= 0) ? NumberMallocAddMemory(BHEAD0),
AT.NumberMemHeap[--AT.NumberMemTop]: AT.NumberMemHeap[--AT.NumberMemTop] )
00280 #define CacheNumberMalloc(x) ( (AT.CacheNumberMemTop <= 0) ? CacheNumberMallocAddMemory(BHEAD0),
AT.CacheNumberMemHeap[--AT.CacheNumberMemTop]: AT.CacheNumberMemHeap[--AT.CacheNumberMemTop] )
00281 #define TermFree(TermMem,x) AT.TermMemHeap[AT.TermMemTop++] = (WORD *) (TermMem)
00282 #define NumberFree(NumberMem,x) AT.NumberMemHeap[AT.NumberMemTop++] = (UWORD *) (NumberMem)
00283 #define CacheNumberFree(NumberMem,x) AT.CacheNumberMemHeap[AT.CacheNumberMemTop++] = (UWORD
*) (NumberMem)
00284
00285 #else
00286
00287 #define TermMalloc(x) TermMalloc2(BHEAD (char *) (x))
00288 #define NumberMalloc(x) NumberMalloc2(BHEAD (char *) (x))
00289 #define CacheNumberMalloc(x) CacheNumberMalloc2(BHEAD (char *) (x))
00290 #define TermFree(x,y) TermFree2(BHEAD (WORD *) (x), (char *) (y))
00291 #define NumberFree(x,y) NumberFree2(BHEAD (UWORD *) (x), (char *) (y))
00292 #define CacheNumberFree(x,y) CacheNumberFree2(BHEAD (UWORD *) (x), (char *) (y))
00293
00294 #endif
00295
00296 /*
00297 * Macros for checking nesting levels in the compiler, used as follows:
00298 *
00299 *   AC.IfSumCheck[AC.IfLevel] = NestingChecksum();
00300 *   AC.IfLevel++;
00301 *
00302 *   AC.IfLevel--;
00303 *   if ( AC.IfSumCheck[AC.IfLevel] != NestingChecksum() ) {
00304 *       MesNesting();
00305 *   }
00306 *
00307 * Note that NestingChecksum() also contains AC.IfLevel and so in this case
00308 * using increment/decrement operators on it in the left-hand side may be
00309 * confusing.
00310 */
00311 #define NestingChecksum() (AC.IfLevel + AC.RepLevel + AC.arglevel + AC.insidelevel + AC.termlevel +
AC.inexprlevel + AC.dolooplevel + AC.SwitchLevel)
00312 #define MesNesting() MesPrint("&Illegal nesting of if, repeat, argument, inside, term, inexpression
and do")
00313
00314 #define MarkPolyRatFunDirty(T) {if(*T&&AR.PolyFunType==2){WORD *TP,*TT;TT=T+*T;TT-=ABS(TT[-1]);\
TP=T+1;while(TP<TT){if(*TP==AR.PolyFun){TP[2]|=(DIRTYFLAG|MUSTCLEANPRF);}TP+=TP[1];}}\
00315
00316
00317 /*
00318     Macros for nesting input levels for #name = ...; assign instructions.
00319     Note that the level should never go below zero.
00320 */
00321 #define PUSHPREASSIGNLEVEL AP.PreAssignLevel++; { GETIDENTITY \
00322     if ( AP.PreAssignLevel >= AP.MaxPreAssignLevel ) { int i; \
00323     LONG *ap = (LONG *) Malloc1(2*AP.MaxPreAssignLevel*sizeof(LONG *),"PreAssignStack"); \
00324     for ( i = 0; i < AP.MaxPreAssignLevel; i++ ) ap[i] = AP.PreAssignStack[i]; \
00325     M_free(AP.PreAssignStack,"PreAssignStack"); \
00326     AP.MaxPreAssignLevel *= 2; AP.PreAssignStack = ap; \
00327     } \
00328     *AT.WorkPointer++ = AP.PreContinuation; AP.PreContinuation = 0; \
00329     AP.PreAssignStack[AP.PreAssignLevel] = AC.iPointer - AC.iBuffer; }
00330
00331 #define POPPREASSIGNLEVEL if ( AP.PreAssignLevel > 0 ) { GETIDENTITY \
00332     AC.iPointer = AC.iBuffer + AP.PreAssignStack[AP.PreAssignLevel--]; \
00333     AP.PreContinuation = *--AT.WorkPointer; \
00334     *AC.iPointer = 0; }
00335
00336 #ifndef WITHFLOAT
00337 /*
00338     The following macro's are needed to avoid problems with the compilers
00339     and gmp.h. For the C++ files we need the Form include files to be inside
00340     and extern C {} environment, but then the structs.h needs gmp.h to
00341     recognise the mpf_t datatype. This causes no end of problems.
00342     Hence we collect the sensitive objects as (void *) and cast them to
00343     something usable with the macro's below. This way the gmp.h file
00344     needs to be included only in a very limited number of .c files.
00345 */
00346 #define mpftab1 ((mpf_t *) (AT.mpf_tab1))
00347 #define mpftab2 ((mpf_t *) (AT.mpf_tab2))

```

```

00348 #define mpfaux_ ((mpf_t *) (AT.aux_))
00349 #define aux1 ((mpf_t *) (AT.aux_)) [0]
00350 #define aux2 ((mpf_t *) (AT.aux_)) [1]
00351 #define aux3 ((mpf_t *) (AT.aux_)) [2]
00352 #define aux4 ((mpf_t *) (AT.aux_)) [3]
00353 #define aux5 ((mpf_t *) (AT.aux_)) [4]
00354 #define auxjm ((mpf_t *) (AT.aux_)) [5]
00355 #define auxjgm ((mpf_t *) (AT.aux_)) [6]
00356 #define auxsum ((mpf_t *) (AT.aux_)) [7]
00357
00358 #define mpfdelta1 ((mpf_t *) (AS.delta_1)) [0]
00359
00360 #endif
00361
00362
00363 /*
00364     MesPrint("P-level popped to %d with %d", AP.PreAssignLevel, (WORD) (AC.iPointer - AC.iBuffer));
00365
00366     #] Macro's :
00367     #[ Inline functions :
00368 */
00369
00370 /*
00371 * The following three functions give the unsigned absolute value of a signed
00372 * integer even for the most negative integer. This is beyond the scope of
00373 * the standard abs() function and its family, whose return-values are signed.
00374 * In short, we should not use the unary minus operator with signed numbers
00375 * unless we are sure that there are no integer overflows. Instead, we rely on
00376 * two well-defined operations: (i) signed-to-unsigned conversion and
00377 * (ii) unary minus of unsigned operands.
00378 *
00379 * See also:
00380 *   https://stackoverflow.com/a/4536188 (Unary minus and signed-to-unsigned conversion)
00381 *   https://stackoverflow.com/q/8026694 (C: unary minus operator behavior with unsigned operands)
00382 *   https://stackoverflow.com/q/1610947 (Why does stdlib.h's abs() family of functions return a
signed value?)
00383 *   https://blog.regehr.org/archives/226 (A Guide to Undefined Behavior in C and C++, Part 2)
00384 */
00385 static inline unsigned int IntAbs(int x)
00386 {
00387     if ( x >= 0 ) return (unsigned int)x;
00388     return(-(unsigned int)x);
00389 }
00390
00391 static inline UWORD WordAbs(WORD x)
00392 {
00393     if ( x >= 0 ) return (UWORD)x;
00394     return(-(UWORD)x);
00395 }
00396
00397 static inline ULONG LongAbs(LONG x)
00398 {
00399     if ( x >= 0 ) return (ULONG)x;
00400     return(-(ULONG)x);
00401 }
00402
00403 /*
00404 * The following functions provide portable unsigned-to-signed conversions
00405 * (to avoid the implementation-defined behaviour), which is expected to be
00406 * optimized to a no-op.
00407 *
00408 * See also:
00409 *   https://stackoverflow.com/a/13208789 (Efficient unsigned-to-signed cast avoiding
implementation-defined behavior)
00410 */
00411 static inline int UnsignedToInt(unsigned int x)
00412 {
00413     extern void TerminateImpl(int, const char*, int, const char*);
00414     if ( x <= INT_MAX ) return (int)x;
00415     if ( x >= (unsigned int)INT_MIN )
00416         return((int) (x - (unsigned int)INT_MIN) + INT_MIN);
00417     Terminate(1);
00418     return(0);
00419 }
00420
00421 static inline WORD UWordToWord(UWORD x)
00422 {
00423     extern void TerminateImpl(int, const char*, int, const char*);
00424     if ( x <= WORD_MAX_VALUE ) return (WORD)x;
00425     if ( x >= (UWORD)WORD_MIN_VALUE )
00426         return((WORD) (x - (UWORD)WORD_MIN_VALUE) + WORD_MIN_VALUE);
00427     Terminate(1);
00428     return(0);
00429 }
00430
00431 static inline LONG ULongToLong(ULONG x)
00432 {

```

```

00433     extern void TerminateImpl(int, const char*, int, const char*);
00434     if ( x <= LONG_MAX_VALUE ) return((LONG)x);
00435     if ( x >= (ULONG)LONG_MIN_VALUE )
00436         return((LONG)(x - (ULONG)LONG_MIN_VALUE) + LONG_MIN_VALUE);
00437     Terminate(1);
00438     return(0);
00439 }
00440
00441 /*
00442     #] Inline functions :
00443     #[ Thread objects :
00444 */
00445
00452 #ifdef WITHPTHREADS
00453
00454 #define EXTERNLOCK(x) extern pthread_mutex_t x;
00455 #define INILOCK(x) pthread_mutex_t x = PTHREAD_MUTEX_INITIALIZER;
00456 #define EXTERNRWLOCK(x) extern pthread_rwlock_t x;
00457 #define INIRWLOCK(x) pthread_rwlock_t x = PTHREAD_RWLOCK_INITIALIZER;
00458 #ifndef DEBUGGINGLOCKS
00459 #include <asm/errno.h>
00460 #define LOCK(x) while ( pthread_mutex_trylock(&(x)) == EBUSY ) {}
00461 #define RWLOCKR(x) while ( pthread_rwlock_tryrdlock(&(x)) == EBUSY ) {}
00462 #define RWLOCKW(x) while ( pthread_rwlock_trywrlock(&(x)) == EBUSY ) {}
00463 #else
00464 #define LOCK(x) pthread_mutex_lock(&(x))
00465 #define RWLOCKR(x) pthread_rwlock_rdlock(&(x))
00466 #define RWLOCKW(x) pthread_rwlock_wrlock(&(x))
00467 #endif
00468 #define UNLOCK(x) pthread_mutex_unlock(&(x))
00469 #define UNRWLOCK(x) pthread_rwlock_unlock(&(x))
00470 #define MLOCK(x) LOCK(x)
00471 #define MUNLOCK(x) UNLOCK(x)
00472
00473 #define GETBIDENTITY
00474 #define GETIDENTITY int identity = WhoAmI(); ALLPRIVATES *B = AB[identity];
00475 #else
00476
00477 #define EXTERNLOCK(x)
00478 #define INILOCK(x)
00479 #define LOCK(x)
00480 #define UNLOCK(x)
00481 #define EXTERNRWLOCK(x)
00482 #define INIRWLOCK(x)
00483 #define RWLOCKR(x)
00484 #define RWLOCKW(x)
00485 #define UNRWLOCK(x)
00486 #ifndef WITHMPI
00487 #define MLOCK(x) do { if ( PF.me != MASTER ) PF_MLock(); } while (0)
00488 #define MUNLOCK(x) do { if ( PF.me != MASTER ) PF_MUnlock(); } while (0)
00489 #else
00490 #define MLOCK(x)
00491 #define MUNLOCK(x)
00492 #endif
00493 #define GETIDENTITY
00494 #define GETBIDENTITY
00495
00496 #endif
00497
00498 /*
00499     #] Thread objects :
00500     #[ Declarations :
00501 */
00502
00503 #ifdef TERMMALLOCDEBUG
00504 extern WORD **DebugHeap1, **DebugHeap2;
00505 #endif
00506
00511 extern void StartVariables(void);
00512 extern void setSignalHandlers(void);
00513 extern UBYTE *CodeToLine(WORD, UBYTE *);
00514 extern UBYTE *AddArrayIndex(WORD, UBYTE *);
00515 extern INDEXENTRY *FindInIndex(WORD, FILEDATA *, WORD, WORD);
00516 extern INDEXENTRY *NextFileIndex(POSITION *);
00517 extern WORD *PasteTerm(PHEAD WORD, WORD *, WORD *, WORD, WORD);
00518 extern UBYTE *StrCopy(UBYTE *, UBYTE *);
00519 extern UBYTE *WrtPower(UBYTE *, WORD);
00520 extern int AccumGCD(PHEAD UWORD *, WORD *, UWORD *, WORD);
00521 extern void AddArgs(PHEAD WORD *, WORD *, WORD *);
00522 extern int AddCoef(PHEAD WORD **, WORD **);
00523 extern int AddLong(UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00524 extern int AddPLon(UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00525 extern int AddPoly(PHEAD WORD **, WORD **);
00526 extern int AddRat(PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00527 extern void AddToLine(UBYTE *);
00528 extern int AddWild(PHEAD WORD, WORD, WORD);
00529 extern int BigLong(UWORD *, WORD, UWORD *, WORD);

```

```

00530 extern int      BinomGen(PHEAD WORD *,WORD,WORD **,WORD,WORD,WORD,WORD,WORD,UWORD *,WORD);
00531 extern int      CheckWild(PHEAD WORD,WORD,WORD,WORD *);
00532 extern int      Chisholm(PHEAD WORD *,WORD);
00533 extern int      CleanExpr(WORD);
00534 extern void     CleanUp(WORD);
00535 extern void     ClearWild(PHEAD0);
00536 extern int      CompareFunctions(WORD *,WORD *);
00537 extern int      Commute(WORD *,WORD *);
00538 extern WORD     DetCommu(WORD *);
00539 extern WORD     DoesCommu(WORD *);
00540 extern int      CompArg(WORD *,WORD *);
00541 extern WORD     CompCoef(WORD *,WORD *);
00542 extern int      CompGroup(PHEAD WORD,WORD **,WORD *,WORD *,WORD);
00543 extern WORD     Compare1(PHEAD WORD *,WORD *,WORD);
00544 extern WORD     CountDo(WORD *,WORD *);
00545 extern WORD     CountFun(WORD *,WORD *);
00546 extern WORD     DimensionSubterm(WORD *);
00547 extern WORD     DimensionTerm(WORD *);
00548 extern WORD     DimensionExpression(PHEAD WORD *);
00549 extern int      Deferred(PHEAD WORD *,WORD);
00550 extern int      DeleteStore(WORD);
00551 extern WORD     DetCurDum(PHEAD WORD *);
00552 extern void     DetVars(WORD *,WORD);
00553 extern int      Distribute(DISTRIBUTE *,WORD);
00554 extern int      DivLong(UWORD *,WORD,UWORD *,WORD,UWORD *,WORD *,UWORD *,WORD *);
00555 extern int      DivRat(PHEAD UWORD *,WORD,UWORD *,WORD,UWORD *,WORD *);
00556 extern int      Divvy(PHEAD UWORD *,WORD *,UWORD *,WORD);
00557 extern int      DoDelta(WORD *);
00558 extern int      DoDelta3(PHEAD WORD *,WORD);
00559 extern int      TestPartitions(WORD *,PARTI *);
00560 extern int      DoPartitions(PHEAD WORD *,WORD);
00561 extern int      CoCanonicalize(UBYTE *);
00562 extern int      DoCanonicalize(PHEAD WORD *,WORD *);
00563 extern int      GenTopologies(PHEAD WORD *,WORD);
00564 extern int      GenDiagrams(PHEAD WORD *,WORD);
00565 extern int      DoTopologyCanonicalize(PHEAD WORD *,WORD,WORD,WORD *);
00566 extern int      DoShattering(PHEAD WORD *,WORD *,WORD *,WORD);
00567 extern int      GenerateTopologies(PHEAD WORD,WORD,WORD,WORD);
00568 extern int      DoTableExpansion(WORD *,WORD);
00569 extern int      DoDistrib(PHEAD WORD *,WORD);
00570 extern int      DoShuffle(WORD *,WORD,WORD,WORD);
00571 extern int      DoPermutations(PHEAD WORD *,WORD);
00572 extern int      Shuffle(WORD *,WORD *,WORD *);
00573 extern int      FinishShuffle(WORD *);
00574 extern int      DoStuffle(WORD *,WORD,WORD,WORD);
00575 extern int      Stuffle(WORD *,WORD *,WORD *);
00576 extern int      FinishStuffle(WORD *);
00577 extern WORD     *StuffRootAdd(WORD *,WORD *,WORD *);
00578 extern int      TestUse(WORD *,WORD);
00579 extern DBASE *   FindTB(UBYTE *);
00580 extern int      CheckTableDeclarations(DBASE *);
00581 extern void     Apply(WORD *,WORD);
00582 extern int      ApplyExec(WORD *,int,WORD);
00583 extern void     ApplyReset(WORD);
00584 extern void     TableReset(void);
00585 extern void     ReWorkT(WORD *,WORD *,WORD);
00586 extern WORD     GetIfDollarNum(WORD *,WORD *);
00587 extern int      FindVar(WORD *,WORD *);
00588 extern int      DoIfStatement(PHEAD WORD *,WORD *);
00589 extern int      DoOnePow(PHEAD WORD *,WORD,WORD,WORD *,WORD *,WORD,WORD *);
00590 extern void     DoRevert(WORD *,WORD *);
00591 extern int      DoSumF1(PHEAD WORD *,WORD *,WORD,WORD);
00592 extern int      DoSumF2(PHEAD WORD *,WORD *,WORD,WORD);
00593 extern int      DoTheta(PHEAD WORD *);
00594 extern LONG     EndSort(PHEAD WORD *,int);
00595 extern int      EntVar(WORD,UBYTE *,WORD,WORD,WORD,WORD);
00596 extern int      EpfCon(PHEAD WORD *,WORD *,WORD,WORD);
00597 extern int      EpfFind(PHEAD WORD *,WORD *);
00598 extern WORD     EpfGen(WORD,WORD *,WORD *,WORD *,WORD);
00599 extern int      EqualArg(WORD *,WORD,WORD);
00600 extern int      Factorial(PHEAD WORD,UWORD *,WORD *);
00601 extern int      Bernoulli(WORD,UWORD *,WORD *);
00602 extern int      FactorIn(PHEAD WORD *,WORD);
00603 extern int      FactorInExpr(PHEAD WORD *,WORD);
00604 extern int      FindAll(PHEAD WORD *,WORD *,WORD,WORD *);
00605 extern WORD     FindMulti(PHEAD WORD *,WORD *);
00606 extern int      FindOnce(PHEAD WORD *,WORD *);
00607 extern int      FindOnly(PHEAD WORD *,WORD *);
00608 extern int      FindRest(PHEAD WORD *,WORD *);
00609 extern void     FindSpecial(WORD *);
00610 extern WORD     FindrNumber(WORD,VARENUM *);
00611 extern void     FiniLine(void);
00612 extern int      FiniTerm(PHEAD WORD *,WORD *,WORD *,WORD,WORD);
00613 extern int      FlushOut(POSITION *,FILEHANDLE *,int);
00614 extern void     FunLevel(PHEAD WORD *);
00615 extern void     AdjustRenumScratch(PHEAD0);
00616 extern void     GarbHand(void);

```



```

00617 extern int      GcdLong (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00618 extern int      LcmLong (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00619 extern void      GCD (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00620 extern ULONG     GCD2 (ULONG, ULONG);
00621 extern int      Generator (PHEAD WORD *, WORD);
00622 extern int      GetBinom (UWORD *, WORD *, WORD, WORD);
00623 extern WORD     GetFromStore (WORD *, POSITION *, RENUMBER, WORD *, WORD);
00624 extern int      GetLong (UBYTE *, UWORD *, WORD *);
00625 extern WORD     GetMoreTerms (WORD *);
00626 extern int      GetMoreFromMem (WORD *, WORD **);
00627 extern WORD     GetOneTerm (PHEAD WORD *, FILEHANDLE *, POSITION *, int);
00628 extern RENUMBER GetTable (WORD, POSITION *, WORD);
00629 extern WORD     GetTerm (PHEAD WORD *);
00630 extern int      Glue (PHEAD WORD *, WORD *, WORD *, WORD);
00631 extern int      InFunction (PHEAD WORD *, WORD *);
00632 extern void     IniLine (WORD);
00633 extern void     IniVars (void);
00634 extern int      InsertTerm (PHEAD WORD *, WORD, WORD, WORD *, WORD *, WORD);
00635 extern void     LongToLine (UWORD *, WORD);
00636 extern int      MakeDirty (WORD *, WORD *, WORD);
00637 extern void     MarkDirty (WORD *, WORD);
00638 extern void     PolyFunDirty (PHEAD WORD *);
00639 extern void     PolyFunClean (PHEAD WORD *);
00640 extern int      MakeModTable (void);
00641 extern int      MatchE (PHEAD WORD *, WORD *, WORD *, WORD);
00642 extern int      MatchCy (PHEAD WORD *, WORD *, WORD *, WORD);
00643 extern int      FunMatchCy (PHEAD WORD *, WORD *, WORD *, WORD);
00644 extern int      FunMatchSy (PHEAD WORD *, WORD *, WORD *, WORD);
00645 extern int      MatchArgument (PHEAD WORD *, WORD *);
00646 extern int      MatchFunction (PHEAD WORD *, WORD *, WORD *);
00647 extern int      MergePatches (WORD);
00648 extern int      MesCerr (char *, UBYTE *);
00649 extern int      MesComp (char *, UBYTE *, UBYTE *);
00650 extern int      Modulus (WORD *);
00651 extern void     MoveDummies (PHEAD WORD *, WORD);
00652 extern int      MulLong (UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00653 extern int      MulRat (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00654 extern int      Mully (PHEAD UWORD *, WORD *, UWORD *, WORD);
00655 extern int      MultDo (PHEAD WORD *, WORD *);
00656 extern int      NewSort (PHEAD0);
00657 extern int      ExtraSymbol (WORD, WORD, WORD, WORD *, WORD *);
00658 extern int      Normalize (PHEAD WORD *);
00659 extern int      BracketNormalize (PHEAD WORD *);
00660 extern void     DropCoefficient (PHEAD WORD *);
00661 extern void     DropSymbols (PHEAD WORD *);
00662 extern int      PutInside (PHEAD WORD *, WORD *);
00663 extern void     OpenTemp (void);
00664 extern void     Pack (UWORD *, WORD *, UWORD *, WORD *);
00665 extern LONG     PasteFile (PHEAD WORD, WORD *, POSITION *, WORD **, RENUMBER, WORD *, WORD);
00666 extern int      Permute (PERM *, WORD);
00667 extern int      PermuteP (PERMP *, WORD);
00668 extern int      PolyFunMul (PHEAD WORD *);
00669 extern int      PopVariables (void);
00670 extern int      PrepPoly (PHEAD WORD *, WORD);
00671 extern int      Processor (void);
00672 extern int      Product (UWORD *, WORD *, WORD);
00673 extern void     PrtLong (UWORD *, WORD, UBYTE *);
00674 extern void     PrtTerms (void);
00675 extern void     PrintDeprecation (const char *, const char *);
00676 extern void     PrintRunningTime (void);
00677 extern LONG     GetRunningTime (void);
00678 extern int      PutBracket (PHEAD WORD *);
00679 extern LONG     PutIn (FILEHANDLE *, POSITION *, WORD *, WORD **, int);
00680 extern int      PutInStore (INDEXENTRY *, WORD);
00681 extern WORD     PutOut (PHEAD WORD *, POSITION *, FILEHANDLE *, WORD);
00682 extern UWORD    Quotient (UWORD *, WORD *, WORD);
00683 extern int      RaisPow (PHEAD UWORD *, WORD *, UWORD);
00684 extern void     RaisPowCached (PHEAD WORD, WORD, UWORD **, WORD *);
00685 extern WORD     RaisPowMod (WORD, WORD, WORD);
00686 extern int      NormalModulus (UWORD *, WORD *);
00687 extern int      MakeInverses (void);
00688 extern int      GetModInverses (WORD, WORD, WORD *, WORD *);
00689 extern int      GetLongModInverses (PHEAD UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *, UWORD *, WORD
*);
00690 extern void     RatToLine (UWORD *, WORD);
00691 extern int      RatioFind (PHEAD WORD *, WORD *);
00692 extern int      RatioGen (PHEAD WORD *, WORD *, WORD, WORD);
00693 extern WORD     ReNumber (PHEAD WORD *);
00694 extern WORD     ReadSnum (UBYTE **);
00695 extern WORD     Remain10 (UWORD *, WORD *);
00696 extern WORD     Remain4 (UWORD *, WORD *);
00697 extern int      ResetScratch (void);
00698 extern int      ResolveSet (PHEAD WORD *, WORD *, WORD *);
00699 extern int      RevertScratch (void);
00700 extern int      ScanFunctions (PHEAD WORD *, WORD *, WORD);
00701 extern void     SeekScratch (FILEHANDLE *, POSITION *);
00702 extern void     SetEndScratch (FILEHANDLE *, POSITION *);

```



```

00703 extern void SetEndHScratch(FILEHANDLE *, POSITION *);
00704 extern int SetFileIndex(void);
00705 extern int SFlush(FILEHANDLE *);
00706 extern int Simplify(PHEAD UWORD *, WORD *, UWORD *, WORD *);
00707 extern int SortWild(WORD *, WORD);
00708 extern FILE *LocateBase(char **, char **, char *);
00709 extern LONG SplitMerge(PHEAD WORD **, LONG);
00710 extern int StoreTerm(PHEAD WORD *);
00711 extern void SubPLon(UWORD *, WORD, UWORD *, WORD, UWORD *, WORD *);
00712 extern void Substitute(PHEAD WORD *, WORD *, WORD);
00713 extern int SymFind(PHEAD WORD *, WORD *);
00714 extern int SymGen(PHEAD WORD *, WORD *, WORD, WORD);
00715 extern WORD Symmetrize(PHEAD WORD *, WORD *, WORD, WORD, WORD);
00716 extern int FullSymmetrize(PHEAD WORD *, int);
00717 extern int TakeModulus(UWORD *, WORD *, UWORD *, WORD, WORD);
00718 extern int TakeNormalModulus(UWORD *, WORD *, UWORD *, WORD, WORD);
00719 extern void TalToLine(UWORD);
00720 extern int TenVec(PHEAD WORD *, WORD *, WORD, WORD);
00721 extern int TenVecFind(PHEAD WORD *, WORD *);
00722 extern int TermRenumber(WORD *, RENUMBER, WORD);
00723 extern void TestDrop(void);
00724 extern void PutInVflags(WORD);
00725 extern int TestMatch(PHEAD WORD *, WORD *);
00726 extern WORD TestSub(PHEAD WORD *, WORD);
00727 extern LONG TimeCPU(WORD);
00728 extern LONG TimeChildren(WORD);
00729 extern LONG TimeWallClock(WORD);
00730 extern LONG Timer(int);
00731 extern int GetTimerInfo(LONG **, LONG **);
00732 extern void WriteTimerInfo(LONG *, LONG *);
00733 extern LONG GetWorkerTimes(void);
00734 extern int ToStorage(EXPRESSIONS, POSITION *);
00735 extern void TokenToLine(UBYTE *);
00736 extern int Trace4(PHEAD WORD *, WORD *, WORD, WORD);
00737 extern int Trace4Gen(PHEAD TRACES *, WORD);
00738 extern int Trace4no(WORD, WORD *, TRACES *);
00739 extern int TraceFind(PHEAD WORD *, WORD *);
00740 extern int TraceN(PHEAD WORD *, WORD *, WORD, WORD);
00741 extern int TraceNgen(PHEAD TRACES *, WORD);
00742 extern WORD TraceNno(WORD, WORD *, TRACES *);
00743 extern int Traces(PHEAD WORD *, WORD *, WORD, WORD);
00744 extern WORD Trick(WORD *, TRACES *);
00745 extern int TryDo(PHEAD WORD *, WORD *, WORD);
00746 extern void UnPack(UWORD *, WORD, WORD *, WORD *);
00747 extern int VarStore(UBYTE *, WORD, WORD, WORD);
00748 extern WORD WildFill(PHEAD WORD *, WORD *, WORD *);
00749 extern int WriteAll(void);
00750 extern int WriteOne(UBYTE *, int, int, WORD);
00751 extern void WriteArgument(WORD *);
00752 extern int WriteExpression(WORD *, LONG);
00753 extern int WriteInnerTerm(WORD *, WORD);
00754 extern void WriteLists(void);
00755 extern void WriteSetup(void);
00756 extern void WriteStats(POSITION *, WORD, WORD);
00757 extern int WriteSubTerm(WORD *, WORD);
00758 extern int WriteTerm(WORD *, WORD *, WORD, WORD, WORD);
00759 extern int execarg(PHEAD WORD *, WORD);
00760 extern int execterm(PHEAD WORD *, WORD);
00761 extern void SpecialCleanup(PHEAD0);
00762 extern void SetMods(void);
00763 extern void UnSetMods(void);
00764
00765 /*-----*/
00766
00767 extern int DoExecute(WORD, WORD);
00768 extern void SetScratch(FILEHANDLE *, POSITION *);
00769 extern void Warning(char *);
00770 extern void HighWarning(char *);
00771 extern int SpareTable(TABLES);
00772
00773 extern UBYTE *strDup1(UBYTE *, char *);
00774 extern void *Mallocl1(LONG, const char *);
00775 extern int DoTail(int, UBYTE **);
00776 extern int OpenInput(void);
00777 extern int PutPreVar(UBYTE *, UBYTE *, UBYTE *, int);
00778 extern void Error0(char *);
00779 extern void Error1(char *, UBYTE *);
00780 extern void Error2(char *, char *, UBYTE *);
00781 extern UBYTE ReadFromStream(STREAM *);
00782 extern UBYTE GetFromStream(STREAM *);
00783 extern UBYTE LookInStream(STREAM *);
00784 extern STREAM *OpenStream(UBYTE *, int, int, int);
00785 extern int LocateFile(UBYTE **, int);
00786 extern STREAM *CloseStream(STREAM *);
00787 extern void PositionStream(STREAM *, LONG);
00788 extern int ReverseStatements(STREAM *);
00789 extern int ProcessOption(UBYTE *, UBYTE *, int);

```

```

00790 extern int      DoSetups(void);
00791 extern void      TerminateImpl(int, const char *,int, const char *);
00792 extern NAMENODE *GetNode(NAMETREE *,UBYTE *);
00793 extern int      AddName(NAMETREE *,UBYTE *,WORD,WORD,int *);
00794 extern int      GetName(NAMETREE *,UBYTE *,WORD *,int);
00795 extern UBYTE    *GetFunction(UBYTE *,WORD *);
00796 extern UBYTE    *GetNumber(UBYTE *,WORD *);
00797 extern int      GetLastExprName(UBYTE *,WORD *);
00798 extern int      GetAutoName(UBYTE *,WORD *);
00799 extern int      GetVar(UBYTE *,WORD *,WORD *,int,int);
00800 extern int      MakeDubious(NAMETREE *,UBYTE *,WORD *);
00801 extern int      GetOName(NAMETREE *,UBYTE *,WORD *,int);
00802 extern void      DumpTree(NAMETREE *);
00803 extern void      DumpNode(NAMETREE *,WORD,WORD);
00804 extern void      LinkTree(NAMETREE *,WORD,WORD);
00805 extern void      CopyTree(NAMETREE *,NAMETREE *,WORD,WORD);
00806 extern int      CompactifyTree(NAMETREE *,WORD);
00807 extern NAMETREE *MakeNameTree(void);
00808 extern void      FreeNameTree(NAMETREE *);
00809 extern int      AddExpression(UBYTE *,int,int);
00810 extern int      AddSymbol(UBYTE *,int,int,int,int);
00811 extern int      AddDollar(UBYTE *,WORD,WORD *,LONG);
00812 extern int      ReplaceDollar(WORD,WORD,WORD *,LONG);
00813 extern int      DollarRaiseLow(UBYTE *,LONG);
00814 extern int      AddVector(UBYTE *,int,int);
00815 extern int      AddDubious(UBYTE *);
00816 extern int      AddIndex(UBYTE *,int,int);
00817 extern UBYTE    *DoDimension(UBYTE *,int *,int *);
00818 extern int      AddFunction(UBYTE *,int,int,int,int,int,int,int);
00819 extern int      CoCommuteInSet(UBYTE *);
00820 extern int      CoFunction(UBYTE *,int,int);
00821 extern int      TestName(UBYTE *);
00822 extern int      AddSet(UBYTE *,WORD);
00823 extern int      DoElements(UBYTE *,SETS,UBYTE *);
00824 extern int      DoTempSet(UBYTE *,UBYTE *);
00825 extern int      NameConflict(int,UBYTE *);
00826 extern int      OpenFile(char *);
00827 extern int      OpenAddFile(char *);
00828 extern int      ReOpenFile(char *);
00829 extern int      CreateFile(char *);
00830 extern int      CreateLogFile(char *);
00831 extern void      CloseFile(int);
00832 extern int      CopyFile(char *, char *);
00833 extern int      CreateHandle(void);
00834 extern LONG      ReadFile(int,UBYTE *,LONG);
00835 extern LONG      ReadPosFile(PHEAD FILEHANDLE *,UBYTE *,LONG,POSITION *);
00836 extern LONG      WriteFileToFile(int,UBYTE *,LONG);
00837 extern void      SeekFile(int,POSITION *,int);
00838 extern LONG      TellFile(int);
00839 extern void      FlushFile(int);
00840 extern int      GetPosFile(int,fpos_t *);
00841 extern int      SetPosFile(int,fpos_t *);
00842 extern void      SynchFile(int);
00843 extern void      TruncateFile(int);
00844 extern int      GetChannel(char *,int);
00845 extern int      GetAppendChannel(char *);
00846 extern int      CloseChannel(char *);
00847 extern void      inictable(void);
00848 extern KEYWORD *findcommand(UBYTE *);
00849 extern int      inicbufs(void);
00850 extern void      StartFiles(void);
00851 extern UBYTE    *MakeDate(void);
00852 extern void      PreProcessor(void);
00853 extern void      *FromList(LIST *);
00854 extern void      *From0List(LIST *);
00855 extern void      *FromVarList(LIST *);
00856 extern int      DoubleList(void ***,int *,int,char *);
00857 extern int      DoubleLList(void ***,LONG *,int,char *);
00858 extern void      DoubleBuffer(void **,void **,int,char *);
00859 extern void      ExpandBuffer(void **,LONG *,int);
00860 extern LONG      iexp(LONG,int);
00861 extern int      IsLikeVector(WORD *);
00862 extern int      AreArgsEqual(WORD *,WORD *);
00863 extern int      CompareArgs(WORD *,WORD *);
00864 extern UBYTE    *SkipField(UBYTE *,int);
00865 extern int      StrCmp(UBYTE *,UBYTE *);
00866 extern int      StrICmp(UBYTE *,UBYTE *);
00867 extern int      StrHICmp(UBYTE *,UBYTE *);
00868 extern int      StrICont(UBYTE *,UBYTE *);
00869 extern int      CmpArray(WORD *,WORD *,WORD);
00870 extern int      ConWord(UBYTE *,UBYTE *);
00871 extern int      StrLen(UBYTE *);
00872 extern UBYTE    *GetPreVar(UBYTE *,int);
00873 extern void      ToGeneral(WORD *,WORD *,WORD);
00874 extern WORD      ToPolyFunGeneral(PHEAD WORD *);
00875 extern int      ToFast(WORD *,WORD *);
00876 extern SETUPPARAMETERS *GetSetupPar(UBYTE *);

```

```

00877 extern int      RecalcSetups(void);
00878 extern int      AllocSetups(void);
00879 extern SORTING *AllocSort (LONG, LONG, LONG, LONG, int, int, LONG, int);
00880 extern void      AllocSortFileName (SORTING *);
00881 extern UBYTE *LoadInputFile (UBYTE *, int);
00882 extern UBYTE      GetInput (void);
00883 extern void      ClearPushback (void);
00884 extern UBYTE      GetChar (int);
00885 extern void      CharOut (UBYTE);
00886 extern void      UnsetAllowDelay (void);
00887 extern void      PopPreVars (int);
00888 extern void      IniModule (int);
00889 extern void      IniSpecialModule (int);
00890 extern int      ModuleInstruction (int *, int *);
00891 extern int      PreProInstruction (void);
00892 extern int      LoadInstruction (int);
00893 extern int      LoadStatement (int);
00894 extern KEYWORD *FindKeyWord (UBYTE *, KEYWORD *, int);
00895 extern KEYWORD *FindInKeyWord (UBYTE *, KEYWORD *, int);
00896 extern int      DoDefine (UBYTE *);
00897 extern int      DoRedefine (UBYTE *);
00898 extern int      TheDefine (UBYTE *, int);
00899 extern int      TheUndefine (UBYTE *);
00900 extern int      ClearMacro (UBYTE *);
00901 extern int      DoUndefine (UBYTE *);
00902 extern int      DoInclude (UBYTE *);
00903 extern int      DoReverseInclude (UBYTE *);
00904 extern int      Include (UBYTE *, int);
00905 /*[14apr2004 mt]:*/
00906 extern int      DoExternal (UBYTE *);
00907 extern int      DoToExternal (UBYTE *);
00908 extern int      DoFromExternal (UBYTE *);
00909 extern int      DoPrompt (UBYTE *);
00910 extern int      DoSetExternal (UBYTE *);
00911 /*[10may2006 mt]:*/
00912 extern int      DoSetExternalAttr (UBYTE *);
00913 /*:[10may2006 mt]:*/
00914 extern int      DoRmExternal (UBYTE *);
00915 /*:[14apr2004 mt]:*/
00916 extern int      DoFactDollar (UBYTE *);
00917 extern WORD      GetDollarNumber (UBYTE **, DOLLARS);
00918 extern int      DoSetRandom (UBYTE *);
00919 extern int      DoOptimize (UBYTE *);
00920 extern int      DoClearOptimize (UBYTE *);
00921 extern int      DoSkipExtraSymbols (UBYTE *);
00922 extern int      DoTimeOutAfter (UBYTE *);
00923 extern int      DoMessage (UBYTE *);
00924 extern int      DoPreOut (UBYTE *);
00925 extern int      DoPreAppend (UBYTE *);
00926 extern int      DoPreCreate (UBYTE *);
00927 extern int      DoPreAssign (UBYTE *);
00928 extern int      DoPreBreak (UBYTE *);
00929 extern int      DoPreDefault (UBYTE *);
00930 extern int      DoPreSwitch (UBYTE *);
00931 extern int      DoPreEndSwitch (UBYTE *);
00932 extern int      DoPreCase (UBYTE *);
00933 extern int      DoPreShow (UBYTE *);
00934 extern int      DoPreExchange (UBYTE *);
00935 extern int      DoSystem (UBYTE *);
00936 extern int      DoPipe (UBYTE *);
00937 extern void      StartPrepro (void);
00938 extern int      DoIfdef (UBYTE *, int);
00939 extern int      DoIfydef (UBYTE *);
00940 extern int      DoIfndef (UBYTE *);
00941 extern int      DoElse (UBYTE *);
00942 extern int      DoElseif (UBYTE *);
00943 extern int      DoEndif (UBYTE *);
00944 extern int      DoTerminate (UBYTE *);
00945 extern int      DoIf (UBYTE *);
00946 extern int      DoCall (UBYTE *);
00947 extern int      DoDebug (UBYTE *);
00948 extern int      DoContinueDo (UBYTE *);
00949 extern int      DoDo (UBYTE *);
00950 extern int      DoBreakDo (UBYTE *);
00951 extern int      DoEnddo (UBYTE *);
00952 extern int      DoEndprocedure (UBYTE *);
00953 extern int      DoInside (UBYTE *);
00954 extern int      DoEndInside (UBYTE *);
00955 extern int      DoProcedure (UBYTE *);
00956 extern int      DoPrePrintTimes (UBYTE *);
00957 extern int      DoPreWrite (UBYTE *);
00958 extern int      DoPreClose (UBYTE *);
00959 extern int      DoPreRemove (UBYTE *);
00960 extern int      DoPreSortReallocate (UBYTE *);
00961 extern int      DoCommentChar (UBYTE *);
00962 extern int      DoPrcExtension (UBYTE *);
00963 extern int      DoPreReset (UBYTE *);

```

```

00964 extern void WriteString(int, UBYTE *, int);
00965 extern void WriteUnfinString(int, UBYTE *, int);
00966 extern UBYTE *AddToString(UBYTE *, UBYTE *, int);
00967 extern UBYTE *PreCalc(void);
00968 extern UBYTE *PreEval(UBYTE *, LONG *);
00969 extern void NumToStr(UBYTE *, LONG);
00970 extern int PreCmp(int, int, UBYTE *, int, int, UBYTE *, int);
00971 extern int PreEq(int, int, UBYTE *, int, int, UBYTE *, int);
00972 extern UBYTE *pParseObject(UBYTE *, int *, LONG *);
00973 extern UBYTE *PreIfEval(UBYTE *, int *);
00974 extern int EvalPreIf(UBYTE *);
00975 extern int PreLoad(PRELOAD *, UBYTE *, UBYTE *, int, char *);
00976 extern int PreSkip(UBYTE *, UBYTE *, int);
00977 extern UBYTE *EndOfToken(UBYTE *);
00978 extern void SetSpecialMode(int, int);
00979 extern void MakeGlobal(void);
00980 extern int ExecModule(int);
00981 extern int ExecStore(void);
00982 extern void FullCleanUp(void);
00983 extern int DoExecStatement(void);
00984 extern int DoPipeStatement(void);
00985 extern int DoPolyfun(UBYTE *);
00986 extern int DoPolyratfun(UBYTE *);
00987 extern int CompileStatement(UBYTE *);
00988 extern UBYTE *ToToken(UBYTE *);
00989 extern int GetDollar(UBYTE *);
00990 extern int MesWork(void);
00991 extern int MesPrint(const char *, ...);
00992 extern int MesCall(char *);
00993 extern UBYTE *NumCopy(WORD, UBYTE *);
00994 extern char *LongCopy(LONG, char *);
00995 extern char *LongLongCopy(off_t *, char *);
00996 extern void ReserveTempFiles(int);
00997 extern void PrintTerm(WORD *, char *);
00998 extern void PrintTermC(WORD *, char *);
00999 extern void PrintSubTerm(WORD *, char *);
01000 extern void PrintWords(WORD *, LONG);
01001 extern void PrintSeq(WORD *, char *);
01002 extern int ExpandTripleDots(int);
01003 extern LONG ComPress(WORD **, LONG *);
01004 extern void StageSort(FILEHANDLE *);
01005
01006 #define M_alloc(x) malloc((size_t)(x))
01007
01008 extern void M_free(void *, const char *);
01009 extern void ClearWildcardNames(void);
01010 extern int AddWildcardName(UBYTE *);
01011 extern int GetWildcardName(UBYTE *);
01012 extern void Globalize(int);
01013 extern void ResetVariables(int);
01014 extern void AddToPreTypes(int);
01015 extern void MessPreNesting(int);
01016 extern LONG GetStreamPosition(STREAM *);
01017 extern WORD *DoubleCbuffer(int, WORD *, int);
01018 extern WORD *AddLHS(int);
01019 extern WORD *AddRHS(int, int);
01020 extern int AddNtoL(int, WORD *);
01021 extern int AddNtoC(int, int, WORD *, int);
01022 extern void DoubleIfBuffers(void);
01023 extern STREAM *CreateStream(UBYTE *);
01024
01025 extern int setonoff(UBYTE *, int *, int, int);
01026 extern int DoPrint(UBYTE *, int);
01027 extern int SetExpr(UBYTE *, int, int);
01028 extern void AddToCom(int, WORD *);
01029 extern int Add2ComStrings(int, WORD *, UBYTE *, UBYTE *);
01030 extern int DoSymmetrize(UBYTE *, int);
01031 extern int DoArgument(UBYTE *, int);
01032 extern int ArgFactorize(PHEAD WORD *, WORD *);
01033 extern WORD *TakeArgContent(PHEAD WORD *, WORD *);
01034 extern WORD *MakeInteger(PHEAD WORD *, WORD *, WORD *);
01035 extern WORD *MakeMod(PHEAD WORD *, WORD *, WORD *);
01036 extern WORD *FindArg(PHEAD WORD *);
01037 extern int InsertArg(PHEAD WORD *, WORD *, int);
01038 extern int CleanupArgCache(PHEAD WORD);
01039 extern int ArgSymbolMerge(WORD *, WORD *);
01040 extern int ArgDotproductMerge(WORD *, WORD *);
01041 extern void SortWeights(LONG *, LONG *, WORD);
01042 extern int DoBrackets(UBYTE *, int);
01043 extern int DoPutInside(UBYTE *, int);
01044 extern WORD *CountComp(UBYTE *, WORD *);
01045 extern int CoAntiBracket(UBYTE *);
01046 extern int CoAntiSymmetrize(UBYTE *);
01047 extern int DoArgPlode(UBYTE *, int);
01048 extern int CoArgExplode(UBYTE *);
01049 extern int CoArgImplode(UBYTE *);
01050 extern int CoArgument(UBYTE *);

```

```

01051 extern int      CoInside(UBYTE *);
01052 extern int      ExecInside(UBYTE *);
01053 extern int      CoInExpression(UBYTE *);
01054 extern int      CoInParallel(UBYTE *);
01055 extern int      CoNotInParallel(UBYTE *);
01056 extern int      DoInParallel(UBYTE *,int);
01057 extern int      CoEndInExpression(UBYTE *);
01058 extern int      CoBracket(UBYTE *);
01059 extern int      CoPutInside(UBYTE *);
01060 extern int      CoAntiPutInside(UBYTE *);
01061 extern int      CoMultiBracket(UBYTE *);
01062 extern int      CoCFunction(UBYTE *);
01063 extern int      CoCTensor(UBYTE *);
01064 extern int      CoCollect(UBYTE *);
01065 extern int      CoCompress(UBYTE *);
01066 extern int      CoContract(UBYTE *);
01067 extern int      CoCycleSymmetrize(UBYTE *);
01068 extern int      CoDelete(UBYTE *);
01069 extern int      CoTableBase(UBYTE *);
01070 extern int      CoApply(UBYTE *);
01071 extern int      CoDenominators(UBYTE *);
01072 extern int      CoDimension(UBYTE *);
01073 extern int      CoDiscard(UBYTE *);
01074 extern int      CoDisorder(UBYTE *);
01075 extern int      CoDrop(UBYTE *);
01076 extern int      CoDropCoefficient(UBYTE *);
01077 extern int      CoDropSymbols(UBYTE *);
01078 extern int      CoElse(UBYTE *);
01079 extern int      CoElseIf(UBYTE *);
01080 extern int      CoEndArgument(UBYTE *);
01081 extern int      CoEndInside(UBYTE *);
01082 extern int      CoEndIf(UBYTE *);
01083 extern int      CoEndRepeat(UBYTE *);
01084 extern int      CoEndTerm(UBYTE *);
01085 extern int      CoEndWhile(UBYTE *);
01086 extern int      CoExit(UBYTE *);
01087 extern int      CoFactArg(UBYTE *);
01088 extern int      CoFactDollar(UBYTE *);
01089 extern int      CoFactorize(UBYTE *);
01090 extern int      CoNFactorize(UBYTE *);
01091 extern int      CoUnFactorize(UBYTE *);
01092 extern int      CoNUnFactorize(UBYTE *);
01093 extern int      DoFactorize(UBYTE *,int);
01094 extern int      CoFill(UBYTE *);
01095 extern int      CoFillExpression(UBYTE *);
01096 extern int      CoFixIndex(UBYTE *);
01097 extern int      CoFormat(UBYTE *);
01098 extern int      CoGlobal(UBYTE *);
01099 extern int      CoGlobalFactorized(UBYTE *);
01100 extern int      CoGoTo(UBYTE *);
01101 extern int      CoId(UBYTE *);
01102 extern int      CoIdNew(UBYTE *);
01103 extern int      CoIdOld(UBYTE *);
01104 extern int      CoIf(UBYTE *);
01105 extern int      CoIfMatch(UBYTE *);
01106 extern int      CoIfNoMatch(UBYTE *);
01107 extern int      CoIndex(UBYTE *);
01108 extern int      CoInsideFirst(UBYTE *);
01109 extern int      CoKeep(UBYTE *);
01110 extern int      CoLabel(UBYTE *);
01111 extern int      CoLoad(UBYTE *);
01112 extern int      CoLocal(UBYTE *);
01113 extern int      CoLocalFactorized(UBYTE *);
01114 extern int      CoMany(UBYTE *);
01115 extern int      CoMerge(UBYTE *);
01116 extern int      CoShuffle(UBYTE *);
01117 extern int      CoMetric(UBYTE *);
01118 extern int      CoModOption(UBYTE *);
01119 extern int      CoModuleOption(UBYTE *);
01120 extern int      CoModulus(UBYTE *);
01121 extern int      CoMulti(UBYTE *);
01122 extern int      CoMultiply(UBYTE *);
01123 extern int      CoNFunction(UBYTE *);
01124 extern int      CoNPrint(UBYTE *);
01125 extern int      CoNTensor(UBYTE *);
01126 extern int      CoNWrite(UBYTE *);
01127 extern int      CoNoDrop(UBYTE *);
01128 extern int      CoNoSkip(UBYTE *);
01129 extern int      CoNormalize(UBYTE *);
01130 extern int      CoMakeInteger(UBYTE *);
01131 extern int      CoFlags(UBYTE *,int);
01132 extern int      CoOff(UBYTE *);
01133 extern int      CoOn(UBYTE *);
01134 extern int      CoOnce(UBYTE *);
01135 extern int      CoOnly(UBYTE *);
01136 extern int      CoOptimizeOption(UBYTE *);
01137 extern int      CoPolyFun(UBYTE *);

```

```

01138 extern int      CoPolyRatFun(UBYTE *);
01139 extern int      CoPrint(UBYTE *);
01140 extern int      CoPrintB(UBYTE *);
01141 extern int      CoProperCount(UBYTE *);
01142 extern int      CoUnitTrace(UBYTE *);
01143 extern int      CoRCycleSymmetrize(UBYTE *);
01144 extern int      CoRatio(UBYTE *);
01145 extern int      CoRedefine(UBYTE *);
01146 extern int      CoRenumber(UBYTE *);
01147 extern int      CoRepeat(UBYTE *);
01148 extern int      CoSave(UBYTE *);
01149 extern int      CoSelect(UBYTE *);
01150 extern int      CoSet(UBYTE *);
01151 extern int      CoSetExitFlag(UBYTE *);
01152 extern int      CoSkip(UBYTE *);
01153 extern int      CoProcessBucket(UBYTE *);
01154 extern int      CoPushHide(UBYTE *);
01155 extern int      CoPopHide(UBYTE *);
01156 extern int      CoHide(UBYTE *);
01157 extern int      CoIntoHide(UBYTE *);
01158 extern int      CoNoIntoHide(UBYTE *);
01159 extern int      CoNoHide(UBYTE *);
01160 extern int      CoUnHide(UBYTE *);
01161 extern int      CoNoUnHide(UBYTE *);
01162 extern int      CoSort(UBYTE *);
01163 extern int      CoSplitArg(UBYTE *);
01164 extern int      CoSplitFirstArg(UBYTE *);
01165 extern int      CoSplitLastArg(UBYTE *);
01166 extern int      CoSum(UBYTE *);
01167 extern int      CoSymbol(UBYTE *);
01168 extern int      CoSymmetrize(UBYTE *);
01169 extern int      DoTable(UBYTE *,int);
01170 extern int      CoTable(UBYTE *);
01171 extern int      CoTerm(UBYTE *);
01172 extern int      CoNTable(UBYTE *);
01173 extern int      CoCTable(UBYTE *);
01174 extern void     EmptyTable(TABLES);
01175 extern int      CoToTensor(UBYTE *);
01176 extern int      CoToVector(UBYTE *);
01177 extern int      CoTrace4(UBYTE *);
01178 extern int      CoTraceN(UBYTE *);
01179 extern int      CoChisholm(UBYTE *);
01180 extern int      CoTransform(UBYTE *);
01181 extern int      CoClearTable(UBYTE *);
01182 extern int      DoChain(UBYTE *,int);
01183 extern int      CoChainin(UBYTE *);
01184 extern int      CoChainout(UBYTE *);
01185 extern int      CoTryReplace(UBYTE *);
01186 extern int      CoVector(UBYTE *);
01187 extern int      CoWhile(UBYTE *);
01188 extern int      CoWrite(UBYTE *);
01189 extern int      CoAuto(UBYTE *);
01190 extern int      CoSwitch(UBYTE *);
01191 extern int      CoCase(UBYTE *);
01192 extern int      CoBreak(UBYTE *);
01193 extern int      CoDefault(UBYTE *);
01194 extern int      CoEndSwitch(UBYTE *);
01195 extern int      CoTBaddto(UBYTE *);
01196 extern int      CoTBaudit(UBYTE *);
01197 extern int      CoTbcleanup(UBYTE *);
01198 extern int      CoTbcreate(UBYTE *);
01199 extern int      CoTBenter(UBYTE *);
01200 extern int      CoTBhelp(UBYTE *);
01201 extern int      CoTBload(UBYTE *);
01202 extern int      CoTBoff(UBYTE *);
01203 extern int      CoTBon(UBYTE *);
01204 extern int      CoTBopen(UBYTE *);
01205 extern int      CoTBreplace(UBYTE *);
01206 extern int      CoTBuse(UBYTE *);
01207 extern int      CoTestUse(UBYTE *);
01208 extern int      CoThreadBucket(UBYTE *);
01209 extern int      AddComString(int,WORD *,UBYTE *,int);
01210 extern int      CompileAlgebra(UBYTE *,int,WORD *);
01211 extern int      IsIdStatement(UBYTE *);
01212 extern UBYTE    *IsRHS(UBYTE *,UBYTE);
01213 extern int      ParenthesesTest(UBYTE *);
01214 extern int      tokenize(UBYTE *,WORD);
01215 extern void     WriteTokens(SBYTE *);
01216 extern int      simpltoken(SBYTE *);
01217 extern int      simpwtoken(SBYTE *);
01218 extern int      simp2token(SBYTE *);
01219 extern int      simp3atoken(SBYTE *,int);
01220 extern int      simp3btoken(SBYTE *,int);
01221 extern int      simp4token(SBYTE *);
01222 extern int      simp5token(SBYTE *,int);
01223 extern int      simp6token(SBYTE *,int);
01224 extern UBYTE    *SkipAName(UBYTE *);

```



```

01225 extern int      TestTables(void);
01226 extern int      GetLabel(UBYTE *);
01227 extern int      CoIdExpression(UBYTE *,int);
01228 extern int      CoAssign(UBYTE *);
01229 extern int      DoExpr(UBYTE *,int,int);
01230 extern int      CompileSubExpressions(SBYTE *);
01231 extern int      CodeGenerator(SBYTE *);
01232 extern int      CompleteTerm(WORD *,UWORD *,UWORD *,WORD,WORD,int);
01233 extern int      CodeFactors(SBYTE *s);
01234 extern WORD     GenerateFactors(WORD,WORD);
01235 extern int      InsTree(int,int);
01236 extern int      FindTree(int,WORD *);
01237 extern void     RedoTree(CBUF *,int);
01238 extern void     ClearTree(int);
01239 extern int      CatchDollar(int);
01240 extern int      AssignDollar(PHEAD WORD *,WORD);
01241 extern UBYTE     *WriteDollarToBuffer(WORD,WORD);
01242 extern UBYTE     *WriteDollarFactorToBuffer(WORD,WORD,WORD);
01243 extern void     AddToDollarBuffer(UBYTE *);
01244 extern int      PutTermInDollar(WORD *,WORD);
01245 extern void     TermAssign(WORD *);
01246 extern void     WildDollars(PHEAD WORD *);
01247 extern LONG     numcommute(WORD *,LONG *);
01248 extern int      FullRenummer(PHEAD WORD *,WORD);
01249 extern int      Lus(WORD *,WORD,WORD,WORD,WORD,WORD);
01250 extern int      FindLus(int,int,int);
01251 extern int      CoReplaceLoop(UBYTE *);
01252 extern int      CoFindLoop(UBYTE *);
01253 extern int      DoFindLoop(UBYTE *,int);
01254 extern int      CoFunPowers(UBYTE *);
01255 extern int      SortTheList(int *,int);
01256 extern int      MatchIsPossible(WORD *,WORD *);
01257 extern int      StudyPattern(WORD *);
01258 extern WORD     DolToTensor(PHEAD WORD);
01259 extern WORD     DolToFunction(PHEAD WORD);
01260 extern WORD     DolToVector(PHEAD WORD);
01261 extern WORD     DolToNumber(PHEAD WORD);
01262 extern WORD     DolToSymbol(PHEAD WORD);
01263 extern WORD     DolToIndex(PHEAD WORD);
01264 extern LONG     DolToLong(PHEAD WORD);
01265 extern int      DollarFactorize(PHEAD WORD);
01266 extern int      CoPrintTable(UBYTE *);
01267 extern int      CoDeallocateTable(UBYTE *);
01268 extern void     CleanDollarFactors(DOLLARS);
01269 extern WORD     *TakeDollarContent(PHEAD WORD *,WORD **);
01270 extern WORD     *MakeDollarInteger(PHEAD WORD *,WORD **);
01271 extern WORD     *MakeDollarMod(PHEAD WORD *,WORD **);
01272 extern int      GetDolNum(PHEAD WORD *, WORD *);
01273 extern void     AddPotModdollar(WORD);
01274
01275 extern int      Optimize(WORD, int);
01276 extern int      ClearOptimize(void);
01277 extern int      TakeLongRoot(UWORD *,WORD *,WORD);
01278 extern int      TakeRatRoot(UWORD *,WORD *,WORD);
01279 extern int      MakeRational(WORD ,WORD , WORD *, WORD *);
01280 extern int      MakeLongRational(PHEAD UWORD *,WORD ,UWORD *,WORD ,UWORD *,WORD *);
01281 extern void     ClearTableTree(TABLES);
01282 extern int      InsTableTree(TABLES,WORD *);
01283 extern void     RedoTableTree(TABLES,int);
01284 extern int      FindTableTree(TABLES,WORD *,int);
01285 extern void     finishcbuf(WORD);
01286 extern void     clearcbuf(WORD);
01287 extern void     CleanupSort(int);
01288 extern FILEHANDLE *AllocFileHandle(WORD,char *);
01289 extern void     DeAllocFileHandle(FILEHANDLE *);
01290 extern void     LowerSortLevel(void);
01291 extern WORD     *PolyRatFunSpecial(PHEAD WORD *, WORD *);
01292 extern void     SimpleSplitMergeRec(WORD *,WORD,WORD *);
01293 extern void     SimpleSplitMerge(WORD *,WORD);
01294 extern WORD     BinarySearch(WORD *,WORD,WORD);
01295 extern int      InsideDollar(PHEAD WORD *,WORD);
01296 extern DOLLARS  DolToTerms(PHEAD WORD);
01297 extern WORD     EvalDoLoopArg(PHEAD WORD *,WORD);
01298 extern int      SetExprCases(int,int,int);
01299 extern int      TestSelect(WORD *,WORD *);
01300 extern void     SubsInAll(PHEAD0);
01301 extern void     TransferBuffer(int,int,int);
01302 extern int      TakeIDfunction(PHEAD WORD *);
01303 extern int      MakeSetupAllocs(void);
01304 extern int      TryFileSetups(void);
01305 extern void     ExchangeExpressions(int,int);
01306 extern void     ExchangeDollars(int,int);
01307 extern int      GetFirstBracket(WORD *,int);
01308 extern int      GetFirstTerm(WORD *,int,int);
01309 extern int      GetContent(WORD *,int);
01310 extern int      CleanupTerm(WORD *);
01311 extern WORD     ContentMerge(PHEAD WORD *,WORD *);

```

```

01312 extern UBYTE *PreIfDollarEval(UBYTE *,int *);
01313 extern LONG TermsInDollar(WORD);
01314 extern LONG SizeOfDollar(WORD);
01315 extern LONG TermsInExpression(WORD);
01316 extern LONG SizeOfExpression(WORD);
01317 extern WORD *TranslateExpression(UBYTE *);
01318 extern int IsSetMember(WORD *,WORD);
01319 extern int IsMultipleOf(WORD *,WORD *);
01320 extern int TwoExprCompare(WORD *,WORD *,int);
01321 extern void UpdatePositions(void);
01322 extern void M_check(void);
01323 extern void M_print(void);
01324 extern void M_check1(void);
01325 extern void PrintTime(UBYTE *);
01326
01327 extern POSITION *FindBracket(WORD,WORD *);
01328 extern void PutBracketInIndex(PHEAD WORD *,POSITION *);
01329 extern void ClearBracketIndex(WORD);
01330 extern void OpenBracketIndex(WORD);
01331 extern int DoNoParallel(UBYTE *);
01332 extern int DoParallel(UBYTE *);
01333 extern int DoModSum(UBYTE *);
01334 extern int DoModMax(UBYTE *);
01335 extern int DoModMin(UBYTE *);
01336 extern int DoModLocal(UBYTE *);
01337 extern UBYTE *DoModDollar(UBYTE *,int);
01338 extern int DoProcessBucket(UBYTE *);
01339 extern int DoinParallel(UBYTE *);
01340 extern int DonotinParallel(UBYTE *);
01341
01342 extern int FlipTable(FUNCTIONS,int);
01343 extern int ChainIn(PHEAD WORD *,WORD);
01344 extern int ChainOut(PHEAD WORD *,WORD);
01345 extern int ArgumentImplode(PHEAD WORD *,WORD *);
01346 extern int ArgumentExplode(PHEAD WORD *,WORD *);
01347 extern int DenToFunction(WORD *,WORD);
01348
01349 extern WORD HowMany(PHEAD WORD *,WORD *);
01350 extern void RemoveDollars(void);
01351 extern LONG CountTerms1(PHEAD0);
01352 extern LONG TermsInBracket(PHEAD WORD *,WORD);
01353 extern int Crash(void);
01354
01355 extern char *str_dup(char *);
01356 extern void convertblock(INDEXBLOCK *,INDEXBLOCK *,int);
01357 extern void convertnamesblock(NAMESBLOCK *,NAMESBLOCK *,int);
01358 extern void convertiniinfo(INIINFO *,INIINFO *,int);
01359 extern int ReadIndex(DBASE *);
01360 extern int WriteIndexBlock(DBASE *,MLONG);
01361 extern int WriteNamesBlock(DBASE *,MLONG);
01362 extern int WriteIndex(DBASE *);
01363 extern int WriteIniInfo(DBASE *);
01364 extern int ReadIniInfo(DBASE *);
01365 extern int AddToIndex(DBASE *,MLONG);
01366 extern DBASE *GetDbase(char *,MLONG);
01367 extern DBASE *OpenDbase(char *);
01368 extern char *ReadObject(DBASE *,MLONG,char *);
01369 extern char *ReadObjObject(DBASE *,MLONG,MLONG,char *);
01370 extern int ExistsObject(DBASE *,MLONG,char *);
01371 extern int DeleteObject(DBASE *,MLONG,char *);
01372 extern int WriteObject(DBASE *,MLONG,char *,char *,MLONG);
01373 extern MLONG AddObject(DBASE *,MLONG,char *,char *);
01374 extern DBASE *NewDbase(char *,MLONG);
01375 extern void FreeTableBase(DBASE *);
01376 extern int ComposeTableName(DBASE *);
01377 extern int PutTableName(DBASE *);
01378 extern MLONG AddTableName(DBASE *,char *,TABLES);
01379 extern MLONG GetTableName(DBASE *,char *);
01380 extern MLONG FindTableNumber(DBASE *,char *);
01381 extern int TryEnvironment(void);
01382
01383 #ifdef WITHZLIB
01384 extern int SetupOutputGZIP(FILEHANDLE *);
01385 extern int PutOutputGZIP(FILEHANDLE *);
01386 extern int FlushOutputGZIP(FILEHANDLE *);
01387 extern int SetupAllInputGZIP(SORTING *);
01388 extern LONG FillInputGZIP(FILEHANDLE *,POSITION *,UBYTE *,LONG,int);
01389 extern void ClearSortGZIP(FILEHANDLE *f);
01390 #endif
01391
01392 #ifdef WITHPTHREADS
01393 extern void BeginIdentities(void);
01394 extern int WhoAmI(void);
01395 extern int StartAllThreads(int);
01396 extern void StartHandleLock(void);
01397 extern void TerminateAllThreads(void);
01398 extern int GetAvailableThread(void);

```



```

01399 extern int      ConditionalGetAvailableThread(void);
01400 extern int      BalanceRunThread(PHEAD int,WORD *,WORD);
01401 extern void     WakeupThread(int,int);
01402 extern int      MasterWait(void);
01403 extern int      InParallelProcessor(void);
01404 extern int      ThreadsProcessor(EXPRESSIONS,WORD,WORD);
01405 extern int      MasterMerge(void);
01406 extern int      PutToMaster(PHEAD WORD *);
01407 extern void     SetWorkerFiles(void);
01408 extern int      MakeThreadBuckets(int,int);
01409 extern int      SendOneBucket(int);
01410 extern int      LoadOneThread(int,int,THREADBUCKET *,int);
01411 extern void     *RunSortBot(void *);
01412 extern void     MasterWaitAllSortBots(void);
01413 extern int      SortBotMerge(PHEAD0);
01414 extern int      SortBotOut(PHEAD WORD *);
01415 extern void     DefineSortBotTree(void);
01416 extern int      SortBotMasterMerge(void);
01417 extern int      SortBotWait(int);
01418 extern void     StartIdentity(void);
01419 extern void     FinishIdentity(void *);
01420 extern int      SetIdentity(int *);
01421 extern ALLPRIVATES *InitializeOneThread(int);
01422 extern void     FinalizeOneThread(int);
01423 extern void     ClearAllThreads(void);
01424 extern void     *RunThread(void *);
01425 extern void     IAmAvailable(int);
01426 extern int      ThreadWait(int);
01427 extern int      ThreadClaimedBlock(int);
01428 extern int      GetThread(int);
01429 extern int      UpdateOneThread(int);
01430 extern void     MasterWaitAll(void);
01431 extern void     MasterWaitAllBlocks(void);
01432 extern int      MasterWaitThread(int);
01433 extern void     WakeupMasterFromThread(int,int);
01434 extern int      LoadReadjusted(void);
01435 extern int      IniSortBlocks(int);
01436 extern int      UpdateSortBlocks(int);
01437 extern int      TreatIndexEntry(PHEAD LONG);
01438 extern WORD     GetTerm2(PHEAD WORD *);
01439 extern void     SetHideFiles(void);
01440
01441 #endif
01442
01443 extern int      CopyExpression(FILEHANDLE *,FILEHANDLE *);
01444
01445 extern int      set_in(UBYTE, set_of_char);
01446 extern one_byte set_set(UBYTE, set_of_char);
01447 extern one_byte set_del(UBYTE, set_of_char);
01448 extern one_byte set_sub(set_of_char, set_of_char, set_of_char);
01449 extern int      DoPreAddSeparator(UBYTE *);
01450 extern int      DoPreRmSeparator(UBYTE *);
01451
01452 /*See the file extcmd.c*/
01453 extern int      openExternalChannel(UBYTE *,int,UBYTE *,UBYTE *);
01454 extern int      initPresetExternalChannels(UBYTE *, int);
01455 extern int      closeExternalChannel(int);
01456 extern int      selectExternalChannel(int);
01457 extern int      getCurrentExternalChannel(void);
01458 extern void     closeAllExternalChannels(void);
01459
01460 typedef int      (*WRITEBUFTOEXTCHANNEL)(char *,size_t);
01461 typedef int      (*GETCFROMEXTCHANNEL)(void);
01462 typedef int      (*SETTERMINATORFOREXTCHANNEL)(char *);
01463 typedef int      (*SETKILLMODEFOREXTCHANNEL)(int,int);
01464 typedef LONG     (*WRITEFILE)(int,UBYTE *,LONG);
01465 typedef WORD     (*GETTERM)(PHEAD WORD *);
01466
01467 #define CompareTerms ((COMPARE)AR.CompareRoutine)
01468 #define FiniShuffle AN.SHvar.finishuf
01469 #define DoShtuffle ((DO_UFFLE)AN.SHvar.do_uffle)
01470
01471 extern UBYTE *defineChannel(UBYTE*, HANDLERS*);
01472 extern int writeToChannel(int,UBYTE *,HANDLERS*);
01473 #ifdef WITHEXTCHANNEL
01474 extern LONG WriteToExternalChannel(int,UBYTE *,LONG);
01475 #endif
01476 extern int writeBufToExtChannelOk(char *,size_t);
01477 extern int getcFromExtChannelOk(void);
01478 extern int setKillModeForExternalChannelOk(int,int);
01479 extern int setTerminatorForExternalChannelOk(char *);
01480 extern int getcFromExtChannelFailure(void);
01481 extern int setKillModeForExternalChannelFailure(int,int);
01482 extern int setTerminatorForExternalChannelFailure(char *);
01483 extern int writeBufToExtChannelFailure(char *,size_t);
01484
01485 extern int      ReleaseTB(void);

```

```

01486
01487 extern int      SymbolNormalize(WORD *);
01488 extern int      TestFunFlag(PHEAD WORD *);
01489 extern WORD     CompareSymbols(PHEAD WORD *,WORD *,WORD);
01490 extern WORD     CompareHSymbols(PHEAD WORD *,WORD *,WORD);
01491 extern WORD     NextPrime(PHEAD WORD);
01492 extern WORD     Moebius(PHEAD WORD);
01493 extern UWORD    wranf(PHEAD0);
01494 extern UWORD    iranf(PHEAD UWORD);
01495 extern void     iniwranf(PHEAD0);
01496 extern UBYTE    *PreRandom(UBYTE *);
01497
01498 extern WORD     *PolyNormPoly(PHEAD WORD);
01499 extern WORD     *EvaluateGcd(PHEAD WORD *);
01500 extern int      TreatPolyRatFun(PHEAD WORD *);
01501
01502 extern int      ReadSaveHeader(void);
01503 extern LONG     ReadSaveIndex(FILEINDEX *);
01504 extern LONG     ReadSaveExpression(UBYTE *,UBYTE *,LONG *,LONG *);
01505 extern UBYTE    *ReadSaveTerm32(UBYTE *,UBYTE *,UBYTE **,UBYTE *,UBYTE *,int);
01506 extern LONG     ReadSaveVariables(UBYTE *,UBYTE *,LONG *,LONG *,INDEXENTRY *,LONG *);
01507 extern LONG     WriteStoreHeader(WORD);
01508
01509 extern void     InitRecovery(void);
01510 extern int      CheckRecoveryFile(void);
01511 extern void     DeleteRecoveryFile(void);
01512 extern char     *RecoveryFilename(void);
01513 extern int      DoRecovery(int *);
01514 extern void     DoCheckpoint(int);
01515
01516 extern void     NumberMallocAddMemory(PHEAD0);
01517 extern void     CacheNumberMallocAddMemory(PHEAD0);
01518 extern void     TermMallocAddMemory(PHEAD0);
01519 #ifndef MEMORYMACROS
01520 extern WORD     *TermMalloc2(PHEAD char *text);
01521 extern void     TermFree2(PHEAD WORD *term,char *text);
01522 extern UWORD    *NumberMalloc2(PHEAD char *text);
01523 extern UWORD    *CacheNumberMalloc2(PHEAD char *text);
01524 extern void     NumberFree2(PHEAD UWORD *NumberMem,char *text);
01525 extern void     CacheNumberFree2(PHEAD UWORD *NumberMem,char *text);
01526 #endif
01527
01528 extern void     ExprStatus(EXPRESSIONS);
01529 extern void     iniTools(void);
01530 extern int      TestTerm(WORD *);
01531
01532 extern int      RunTransform(PHEAD WORD *term, WORD *params);
01533 extern int      RunEncode(PHEAD WORD *fun, WORD *args, WORD *info);
01534 extern int      RunDecode(PHEAD WORD *fun, WORD *args, WORD *info);
01535 extern int      RunReplace(PHEAD WORD *fun, WORD *args, WORD *info);
01536 extern int      RunImplode(WORD *fun, WORD *args);
01537 extern int      RunExplode(PHEAD WORD *fun, WORD *args);
01538 extern int      TestArgNum(int n, int totarg, WORD *args);
01539 extern WORD     PutArgInScratch(WORD *arg,UWORD *scrat);
01540 extern UBYTE    *ReadRange(UBYTE *s, WORD *out, int par);
01541 extern int      FindRange(PHEAD WORD *,WORD *,WORD *,WORD);
01542 extern int      RunPermute(PHEAD WORD *fun, WORD *args, WORD *info);
01543 extern int      RunReverse(PHEAD WORD *fun, WORD *args);
01544 extern int      RunCycle(PHEAD WORD *fun, WORD *args, WORD *info);
01545 extern int      RunAddArg(PHEAD WORD *fun, WORD *args);
01546 extern int      RunMulArg(PHEAD WORD *fun, WORD *args);
01547 extern int      RunIsLyndon(PHEAD WORD *fun, WORD *args, int par);
01548 extern WORD     RunToLyndon(PHEAD WORD *fun, WORD *args, int par);
01549 extern int      RunDropArg(PHEAD WORD *fun, WORD *args);
01550 extern int      RunSelectArg(PHEAD WORD *fun, WORD *args);
01551 extern int      RunDedup(PHEAD WORD *fun, WORD *args);
01552 extern int      RunZtoHArg(PHEAD WORD *fun, WORD *args);
01553 extern int      RunHtoZArg(PHEAD WORD *fun, WORD *args);
01554
01555 extern int      NormPolyTerm(PHEAD WORD *);
01556 extern WORD     ComparePoly(WORD *, WORD *, WORD);
01557 extern int      ConvertToPoly(PHEAD WORD *, WORD *,WORD *,WORD);
01558 extern int      LocalConvertToPoly(PHEAD WORD *, WORD *, WORD,WORD);
01559 extern int      ConvertFromPoly(PHEAD WORD *, WORD *, WORD, WORD, WORD, WORD);
01560 extern int      FindSubterm(WORD *);
01561 extern int      FindLocalSubterm(PHEAD WORD *, WORD);
01562 extern void     PrintSubtermList(int,int);
01563 extern void     PrintExtraSymbol(int,WORD *,int);
01564 extern int      FindSubexpression(WORD *);
01565
01566 extern void     UpdateMaxSize(void);
01567
01568 extern int      CoToPolynomial(UBYTE *);
01569 extern int      CoFromPolynomial(UBYTE *);
01570 extern int      CoArgToExtraSymbol(UBYTE *);
01571 extern int      CoExtraSymbols(UBYTE *);
01572 extern UBYTE    *GetDoParam(UBYTE *, WORD **, int);

```

```

01573 extern WORD *GetIfDollarFactor(UBYTE **, WORD *);
01574 extern int CoDo(UBYTE *);
01575 extern int CoEndDo(UBYTE *);
01576 extern int ExtraSymFun(PHEAD WORD *,WORD);
01577 extern int PruneExtraSymbols(WORD);
01578 extern int IniFbuffer(WORD);
01579 extern void IniFbufs(void);
01580 extern int GCDfunction(PHEAD WORD *,WORD);
01581 extern WORD *GCDfunction3(PHEAD WORD *,WORD *);
01582 extern int ReadPolyRatFun(PHEAD WORD *);
01583 extern int FromPolyRatFun(PHEAD WORD *, WORD **, WORD **);
01584 extern WORD *PolyDiv(PHEAD WORD *,WORD *,char *);
01585 extern void GCDclean(PHEAD WORD *, WORD *);
01586 extern WORD *TakeSymbolContent(PHEAD WORD *,WORD *);
01587 extern int GCDterms(PHEAD WORD *,WORD *,WORD *);
01588 extern WORD *PutExtraSymbols(PHEAD WORD *,WORD,int *);
01589 extern WORD *TakeExtraSymbols(PHEAD WORD *,WORD);
01590 extern WORD *MultiplyWithTerm(PHEAD WORD *, WORD *,WORD);
01591 extern WORD *TakeContent(PHEAD WORD *, WORD *);
01592 extern int MergeSymbolLists(PHEAD WORD *, WORD *, int);
01593 extern int MergeDotproductLists(PHEAD WORD *, WORD *, int);
01594 extern WORD *CreateExpression(PHEAD WORD);
01595 extern int DIVfunction(PHEAD WORD *,WORD,int);
01596 extern WORD *MULfunc(PHEAD WORD *, WORD *);
01597 extern WORD *ConvertArgument(PHEAD WORD *,int *);
01598 extern int ExpandRat(PHEAD WORD *);
01599 extern int InvPoly(PHEAD WORD *,WORD,WORD);
01600 extern WORD TestDoLoop(PHEAD WORD *,WORD);
01601 extern WORD TestEndDoLoop(PHEAD WORD *,WORD);
01602
01603 extern WORD *poly_gcd(PHEAD WORD *, WORD *, WORD);
01604 extern WORD *poly_div(PHEAD WORD *, WORD *, WORD);
01605 extern WORD *poly_rem(PHEAD WORD *, WORD *, WORD);
01606 extern WORD *poly_inverse(PHEAD WORD *, WORD *);
01607 extern WORD *poly_mul(PHEAD WORD *, WORD *);
01608 extern WORD *poly_ratfun_add(PHEAD WORD *, WORD *);
01609 extern int poly_ratfun_normalize(PHEAD WORD *);
01610 extern int poly_factorize_argument(PHEAD WORD *, WORD *);
01611 extern WORD *poly_factorize_dollar(PHEAD WORD *);
01612 extern int poly_factorize_expression(EXPRESSIONS);
01613 extern int poly_unfactorize_expression(EXPRESSIONS);
01614 extern void poly_free_poly_vars(PHEAD const char *);
01615
01616 #ifdef WITHFLINT
01617 extern void flint_final_cleanup_thread(void);
01618 extern void flint_final_cleanup_master(void);
01619 extern WORD* flint_div(PHEAD WORD *, WORD *, const WORD);
01620 extern int flint_factorize_argument(PHEAD WORD *, WORD *);
01621 extern WORD* flint_factorize_dollar(PHEAD WORD *);
01622 extern WORD* flint_gcd(PHEAD WORD *, WORD *, const WORD);
01623 extern WORD* flint_inverse(PHEAD WORD *, WORD *);
01624 extern WORD* flint_mul(PHEAD WORD *, WORD *);
01625 extern WORD* flint_ratfun_add(PHEAD WORD *, WORD *);
01626 extern int flint_ratfun_normalize(PHEAD WORD *);
01627 extern WORD* flint_rem(PHEAD WORD *, WORD *, const WORD);
01628 extern void flint_check_version(void);
01629 #endif
01630
01631 extern void optimize_print_code (int);
01632
01633 #ifdef WITHPTHREADS
01634 extern void find_Horner_MCTS_expand_tree(void);
01635 extern void find_Horner_MCTS_expand_tree_threaded(void);
01636 extern void optimize_expression_given_Horner(void);
01637 extern void optimize_expression_given_Horner_threaded(void);
01638 #endif
01639
01640 extern int DoPreAdd(UBYTE *s);
01641 extern int DoPreUseDictionary(UBYTE *s);
01642 extern int DoPreCloseDictionary(UBYTE *s);
01643 extern int DoPreOpenDictionary(UBYTE *s);
01644 extern void RemoveDictionary(DICTIONARY *dict);
01645 extern void UnSetDictionary(void);
01646 extern int SetDictionaryOptions(UBYTE *options);
01647 extern int AddToDictionary(DICTIONARY *dict,UBYTE *left,UBYTE *right);
01648 extern int AddDictionary(UBYTE *name);
01649 extern int FindDictionary(UBYTE *name);
01650 extern UBYTE *IsExponentSign(void);
01651 extern UBYTE *IsMultiplySign(void);
01652 extern void TransformRational(UWORD *a, WORD na);
01653 extern void WriteDictionary(DICTIONARY *);
01654 extern void ShrinkDictionary(DICTIONARY *);
01655 extern void MultiplyToLine(void);
01656 extern UBYTE *FindSymbol(WORD num);
01657 extern UBYTE *FindVector(WORD num);
01658 extern UBYTE *FindIndex(WORD num);
01659 extern UBYTE *FindFunction(WORD num);

```

```

01660 extern UBYTE *FindFunWithArgs(WORD *t);
01661 extern UBYTE *FindExtraSymbol(WORD num);
01662 extern LONG DictToBytes(DICTIONARY *dict, UBYTE *buf);
01663 extern DICTIONARY *DictFromBytes(UBYTE *buf);
01664 extern int CoCreateSpectator(UBYTE *inp);
01665 extern int CoToSpectator(UBYTE *inp);
01666 extern int CoRemoveSpectator(UBYTE *inp);
01667 extern int CoEmptySpectator(UBYTE *inp);
01668 extern int CoCopySpectator(UBYTE *inp);
01669 extern int PutInSpectator(WORD *, WORD);
01670 extern void ClearSpectators(WORD);
01671 extern WORD GetFromSpectator(WORD *, WORD);
01672 extern void FlushSpectators(void);
01673
01674 extern WORD *PreGCD(PHEAD WORD *, WORD *, int);
01675 extern int InvPoly(PHEAD WORD *, WORD, WORD);
01676
01677 extern int ReadFromScratch(FILEHANDLE *, POSITION *, UBYTE *, POSITION *);
01678 extern int AddToScratch(FILEHANDLE *, POSITION *, UBYTE *, POSITION *, int);
01679
01680 extern int DoPreAppendPath(UBYTE *);
01681 extern int DoPrePrependPath(UBYTE *);
01682
01683 extern int DoSwitch(PHEAD WORD *, WORD *);
01684 extern int DoEndSwitch(PHEAD WORD *, WORD *);
01685 extern SWITCHTABLE *FindCase(WORD, WORD);
01686 extern void SwitchSplitMergeRec(SWITCHTABLE *, WORD, SWITCHTABLE *);
01687 extern void SwitchSplitMerge(SWITCHTABLE *, WORD);
01688 extern int DoubleSwitchBuffers(void);
01689
01690 extern int DistrN(int, int *, int, int *);
01691
01692 extern int DoNamespace(UBYTE *);
01693 extern int DoEndNamespace(UBYTE *);
01694 extern int DoUse(UBYTE *);
01695 extern UBYTE *SkipName(UBYTE *);
01696 extern UBYTE *ConstructName(UBYTE *, UBYTE);
01697 extern int DoSetUserFlag(UBYTE *);
01698 extern int DoClearUserFlag(UBYTE *);
01699
01700 VERTEX *CreateVertex(MODEL *);
01701 UBYTE *ReadParticle(UBYTE *, VERTEX *, MODEL *, int);
01702 int CoModel(UBYTE *);
01703 int CoParticle(UBYTE *);
01704 int CoVertex(UBYTE *);
01705 int CoEndModel(UBYTE *);
01706 int LoadModel(MODEL *);
01707
01708 int CoSetUserFlag(UBYTE *);
01709 int CoClearUserFlag(UBYTE *);
01710 int CoCreateAllLoops(UBYTE *);
01711 int CoCreateAllPaths(UBYTE *);
01712 int CoCreateAll(UBYTE *);
01713
01714 int AllLoops(PHEAD WORD *, WORD);
01715 LONG StartLoops(PHEAD WORD *, WORD, LONG, WORD, WORD *, WORD, WORD *, WORD);
01716 LONG GenLoops(PHEAD WORD *, WORD, LONG, WORD, WORD *, WORD, WORD *, WORD);
01717 void LoopOutput(PHEAD WORD *, WORD, WORD *, WORD);
01718 int AllPaths(PHEAD WORD *, WORD);
01719 LONG GenPaths(PHEAD WORD *, WORD, LONG, WORD, WORD *, WORD, WORD *, WORD);
01720 void PathOutput(PHEAD WORD *, WORD, WORD *, WORD);
01721
01722 #ifdef WITHFLOAT
01723 int DoStartFloat(UBYTE *);
01724 int DoEndFloat(UBYTE *);
01725 int SetFloatPrecision(WORD);
01726 void SetupMZVTables(void);
01727 void SetupMPFTables(void);
01728 void ClearMZVTables(void);
01729 int EvaluateEuler(PHEAD WORD *, WORD, WORD);
01730 int EvaluateSqrt(PHEAD WORD *, WORD, WORD);
01731 int CoEvaluate(UBYTE *);
01732 int PrintFloat(WORD *fun, int numdigits);
01733 int CoToRat(UBYTE *);
01734 int CoToFloat(UBYTE *);
01735 int CoChop(UBYTE *);
01736 int ToRat(PHEAD WORD *, WORD);
01737 int ToFloat(PHEAD WORD *, WORD);
01738 int Chop(PHEAD WORD *, WORD);
01739 WORD FloatFunToRat(PHEAD UWORD *, WORD *);
01740 int AddWithFloat(PHEAD WORD **, WORD **);
01741 int MergeWithFloat(PHEAD WORD **, WORD **);
01742 void ClearfFloat(void);
01743 int TestFloat(WORD *);
01744 SBYTE *ReadFloat(SBYTE *);
01745 UBYTE *CheckFloat(UBYTE *, int *);
01746 void SetfFloatPrecision(LONG);

```

```


01747 int EvaluateFun(PHEAD WORD *, WORD, WORD *);
01748 int CoStrictRounding(UBYTE *);
01749 int StrictRounding(PHEAD WORD *, WORD, WORD, WORD);
01750 #endif
01751
01752 /*
01753  #] Declarations :
01754  */
01755 #endif

```

4.21 diagrams.c File Reference

```
#include "form3.h"
```

Include dependency graph for diagrams.c:

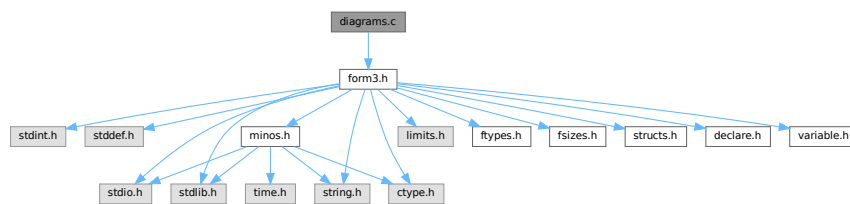

Functions

- int [CoCanonicalize](#) (UBYTE *s)
- int [DoCanonicalize](#) (PHEAD WORD *term, WORD *params)
- int [DoTopologyCanonicalize](#) (PHEAD WORD *term, WORD vert, WORD edge, WORD *args)
- int [DoShattering](#) (PHEAD WORD *connect, WORD *environ, WORD *partitions, WORD nvert)

4.21.1 Detailed Description

Contains the wrapper routines for diagram manipulations.

Definition in file [diagrams.c](#).

4.21.2 Function Documentation

4.21.2.1 CoCanonicalize()

```

int CoCanonicalize (
    UBYTE * s )

```

Definition at line 64 of file [diagrams.c](#).

4.21.2.2 DoCanonicalize()

```
int DoCanonicalize (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line 185 of file [diagrams.c](#).

4.21.2.3 DoTopologyCanonicalize()

```
int DoTopologyCanonicalize (
    PHEAD WORD * term,
    WORD vert,
    WORD edge,
    WORD * args )
```

Definition at line 417 of file [diagrams.c](#).

4.21.2.4 DoShattering()

```
int DoShattering (
    PHEAD WORD * connect,
    WORD * environ,
    WORD * partitions,
    WORD nvert )
```

Definition at line 626 of file [diagrams.c](#).

4.22 diagrams.c

[Go to the documentation of this file.](#)

```
00001
00005 /* #[] License : */
00006 /*
00007 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 * When using this file you are requested to refer to the publication
00009 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 * This is considered a matter of courtesy as the development was paid
00011 * for by FOM the Dutch physics granting agency and we would like to
00012 * be able to track its scientific use to convince FOM of its value
00013 * for the community.
00014 *
00015 * This file is part of FORM.
00016 *
00017 * FORM is free software: you can redistribute it and/or modify it under the
00018 * terms of the GNU General Public License as published by the Free Software
00019 * Foundation, either version 3 of the License, or (at your option) any later
00020 * version.
00021 *
00022 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 * details.
00026 *
00027 * You should have received a copy of the GNU General Public License along
00028 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[] License : */
00031 /*
00032 * #[] Includes : diagrams.c
00033 */
00034
```

```

00035 #include "form3.h"
00036
00037 static WORD one = 1;
00038
00039 /*
00040 #] Includes :
00041 #[ CoCanonicalize :
00042
00043 Syntax:
00044 Canonicalize,mainoption,...
00045 With the main options currently:
00046 Canonicalize,topology,vertexfunction,edgefunction,OutDollar,extraoptions;
00047 Canonicalize,polynomial,InDollar,set_or_setname_or_dollar,OutDollar,extraoptions;
00048 The vertex function needs to have the format (assume it is called vx):
00049 vx(p1,p2,-p3) or vx(-p1,p2,p3,-p4) etc.
00050 The external lines have a vertex with only one line.
00051 All momenta that form connections should be unique.
00052 In principle the - signs are not relevant for the topology, but they
00053 may exist already in the remaining part of the diagram. They are also
00054 part of the canonical form.
00055 The edge function can be used in different ways, depending on the options.
00056 The extraoption(s) should be nonnegative integers or $variables that evaluate
00057 into nonnegative integers (integers less than 2^31).
00058 The Indollar variable contains the polynomial to be canonicalized.
00059 The OutDollar variable should be the name of a $-variable (as in $out) which
00060 will be filled with a replace_ function. The canonicalization can then
00061 be executed in the whole term with the Multiply $out; command.
00062 */
00063
00064 int CoCanonicalize(UBYTE *s)
00065 {
00066     WORD args[10], *a, num;
00067     UBYTE *t, c;
00068     args[0] = TYPECANONICALIZE;
00069     a = args+2;
00070     while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00071     t = s; while ( FG.cTable[*s] == 0 ) s++;
00072     c = *s; *s = 0;
00073     if ( StrICmp(t,(UBYTE *)("topology")) == 0 ) {
00074         *s = c; *a++ = 0;
00075         while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00076         s = GetFunction(s,a);
00077         while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00078         s = GetFunction(s,a+1);
00079         if ( *a == 0 || a[1] == 0 ) return(1);
00080         a += 2;
00081     }
00082     else if ( StrICmp(t,(UBYTE *)("polynomial")) == 0 ) {
00083         *s = c; *a++ = 1;
00084         while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00085     }
00086     /*
00087     Now get the name of the input $-variable
00088     */
00089     if ( *s != '$' ) {
00090         MesPrint("&Canonicalize statement needs a $-variable for its input.");
00091         return(1);
00092     }
00093     s++; t = s; while ( FG.cTable[*s] < 2 ) s++;
00094     c = *s; *s = 0;
00095     if ( GetName(AC.dollarnames,t,&num,NOAUTO) == CDOLLAR ) *a++ = num;
00096     else { *a++ = AddDollar(t,DOLINDEX,&one,1); }
00097     *s = c;
00098     /*
00099     Now the set
00100     */
00101     if ( *s == '{' ) {
00102         t = s+1; SKIPBRA2(s)
00103         c = *s; *s = 0;
00104         *a++ = DoTempSet(t,s);
00105         *s++ = c;
00106     }
00107     else if ( FG.cTable[*s] == 0 || *s == '[' ) {
00108         t = s;
00109         if ( ( s = SkipAName(s) ) == 0 ) {
00110             MesPrint("&Illegal name for set in Canonicalize statement: %s",t);
00111             return(1);
00112         }
00113         c = *s; *s = 0;
00114         if ( GetName(AC.varnames,t,a,WITHAUTO) == CSET ) {
00115             if ( Sets[*a].type != CSYMBOL ) {
00116                 MesPrint("&In Canonicalize: %s is not a set of symbols.",t);
00117                 return(1);
00118             }
00119         }
00120         else {
00121             MesPrint("&In Canonicalize: %s is not a set.",t);
00122             return(1);
00123         }
00124     }
00125 }

```

```

00122         }
00123         *s = c; a++;
00124     }
00125     else if ( *s == '$' ) {
00126         s++; t = s; while ( FG.cTable[*s] < 2 ) s++;
00127         c = *s; *s = 0;
00128         if ( GetName(AC.dollarnames,t,&num,NOAUTO) == CDOLLAR ) *a++ = -num-2;
00129         else {
00130             MesPrint("&In Canonicalize: %s is undefined.",t-1);
00131             return(1);
00132         }
00133         *s = c;
00134     }
00135     else {
00136         MesPrint("&In Canonicalize: Illegal third(=set) argument.");
00137         return(1);
00138     }
00139 }
00140 else {
00141     MesPrint("&Unrecognized option in Canonicalize statement: %s",t);
00142     return(1);
00143 }
00144 /*
00145 Now get the name of the output $-variable
00146 */
00147 while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00148 if ( *s != '$' ) {
00149     MesPrint("&Canonicalize statement needs a $-variable for its output.");
00150     return(1);
00151 }
00152 s++; t = s; while ( FG.cTable[*s] < 2 ) s++;
00153 c = *s; *s = 0;
00154 if ( GetName(AC.dollarnames,t,&num,NOAUTO) == CDOLLAR ) *a++ = num;
00155 else { *a++ = AddDollar(t,DOLINDEX,&one,1); }
00156 *s = c;
00157 /*
00158 Now the options. At the moment we just do one of them.
00159 (the first extra option is relevant to determine the use of the edge function)
00160 In the future we may have to be more flexible.
00161 */
00162 a[0] = 0; /* default value */
00163 while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00164 if ( *s != 0 ) {
00165     s = GetNumber(s,a);
00166     if ( *a == -1 ) return(1);
00167     while ( *s == ',' || *s == '\t' || *s == ' ' ) s++;
00168     a++;
00169 }
00170 /*
00171 Now complete the args string and put it in the compiler buffer
00172 */
00173 args[1] = a-args;
00174 AddNtoL(args[1],args);
00175 return(0);
00176 }
00177 /*
00178 #] CoCanonicalize :
00179 #[ DoCanonicalize :
00180
00181 Does the canonicalization. The output term overwrites the input term.
00182 */
00183
00184 int DoCanonicalize(PHEAD WORD *term, WORD *params)
00185 {
00186     WORD args[10];
00187     int i;
00188
00189     /*
00190 First check whether we need to expand dollars;
00191 */
00192 for ( i = 0; i < params[1]; i++ ) args[i] = params[i];
00193 if ( args[2] == 0 ) { /* topology */
00194     for ( i = 3; i < 5; i++ ) {
00195         if ( args[i] < 0 ) { /* This is a dollar */
00196             args[i] = DolToFunction(BHEAD -args[i]-2);
00197             if ( args[i] == 0 ) {
00198                 MLOCK(ErrorMessageLock);
00199                 MesPrint("Value of $-variable in Canonicalize statement should be a function.");
00200                 MUNLOCK(ErrorMessageLock);
00201                 Terminate(-1);
00202             }
00203         }
00204     }
00205     for ( i = 6; i < args[1]; i++ ) { /* Extra options */
00206         if ( args[i] < 0 ) { /* This is a dollar */
00207             args[i] = DolToNumber(BHEAD -args[i]-2);
00208             if ( args[i] < 0 ) {

```



```

00209             MLOCK(ErrorMessageLock);
00210             MesPrint("Value of $-variable in Canonicalize statement should be a nonnegative
number < %l.", (LONG)MAXPOSITIVE);
00211             MUNLOCK(ErrorMessageLock);
00212             Terminate(-1);
00213         }
00214     }
00215 }
00216 switch ( args[6] ) {
00217     case 1: { /* pass the vertex and edge functions. */
00218         WORD *tstop, *t, *tedge, *te;
00219         tstop = term + *term; tstop -= ABS(tstop[-1]);
00220         t = term+1;
00221         tedge = AT.WorkPointer; te = tedge+1;
00222         while ( t < tstop ) {
00223             if ( *t != args[3] && *t != args[4] ) { t += t[1]; continue; }
00224             for ( i = 0; i < t[1]; i++ ) te[i] = t[i];
00225             te += t[1]; t += t[1];
00226         }
00227         *te++ = 1; *te++ = 1; *te++ = 3;
00228         tedge[0] = te-tedge;
00229         AT.WorkPointer = te;
00230         /*
00231          DoVertexCanonicalize(BHEAD term,tedge,args[3],args[4],args[5],args[6]);
00232         */
00233         AT.WorkPointer = tedge;
00234     } break;
00235     case 2: { /* pass the edge functions only */
00236         WORD *tstop, *t, *tedge, *te;
00237         tstop = term + *term; tstop -= ABS(tstop[-1]);
00238         t = term+1;
00239         tedge = AT.WorkPointer; te = tedge+1;
00240         while ( t < tstop ) {
00241             if ( *t != args[4] ) { t += t[1]; continue; }
00242             for ( i = 0; i < t[1]; i++ ) te[i] = t[i];
00243             te += t[1]; t += t[1];
00244         }
00245         *te++ = 1; *te++ = 1; *te++ = 3;
00246         tedge[0] = te-tedge;
00247         AT.WorkPointer = te;
00248         /*
00249          DoEdgeCanonicalize(BHEAD term,tedge,args[5]);
00250         */
00251         AT.WorkPointer = tedge;
00252     } break;
00253     default: {
00254         DoTopologyCanonicalize(BHEAD term,args[3],args[4],args+5);
00255     } break;
00256 }
00257 /*
00258 Call here the topology canonicalization
00259 We will have the arguments:
00260     args[3]: The function used as vertex function
00261     args[4]: The function used as edge function
00262     args[5]: The number of the dollar to be used for the output
00263     args[6]: Potentially other options (like saying how to use args[4]).
00264     term:    The term in which the topology resides.
00265 */
00266 }
00267 else if ( args[2] == 1 ) { /* polynomial */
00268     WORD *symlist, nsymlist;
00269     for ( i = 6; i < args[1]; i++ ) { /* Extra options */
00270         if ( args[i] < 0 ) { /* This is a dollar */
00271             args[i] = DolToNumber(BHEAD -args[i]-2);
00272             if ( args[i] < 0 ) {
00273                 MLOCK(ErrorMessageLock);
00274                 MesPrint("Value of $-variable in Canonicalize statement should be a nonnegative
number < %l.", (LONG)MAXPOSITIVE);
00275                 MUNLOCK(ErrorMessageLock);
00276                 Terminate(-1);
00277             }
00278         }
00279     }
00280 }
00281 /*
00282 Now we sort out the set. We create a pointer to the list of set
00283 elements, and we determine the number of elements in the set.
00284 */
00285 symlist = AT.WorkPointer;
00286 if ( args[4] < -1 ) { /* Dollar that should expand into a list of symbols */
00287     DOLLARS d = Dollars - args[4] - 2;
00288     WORD *ds, *insym;
00289     if ( d->type != DOLWILDARGS ) {
00290 NoWildArg:
00291         MLOCK(ErrorMessageLock);
00292         MesPrint("Value of $-variable in Canonicalize statement should be a argument wildcard
of symbol arguments.");

```

```

00293             MUNLOCK(ErrorMessageLock);
00294             Terminate(-1);
00295         }
00296         insym = symlist; ds = d->where+1;
00297         while ( *ds ) {
00298             if ( *ds != -SYMBOL ) goto NoWildArg;
00299             *insym++ = ds[1];
00300             ds += 2;
00301         }
00302         nsymlist = insym-symlist;
00303     }
00304     else { /*if ( args[4] >= 0 ) */
00305         WORD *ss, *sy, n;
00306         ss = (WORD *) (AC.SetElementList.lijst)+Sets[args[4]].first;
00307         nsymlist = n = Sets[args[4]].last-Sets[args[4]].first;
00308         sy = symlist = AT.WorkPointer;
00309         NCOPY(sy,ss,n);
00310     }
00311     AT.WorkPointer = symlist+nsymlist;
00312 /*
00313     Call here the polynomial canonicalization
00314     We will have the arguments:
00315         args[3]: The number of the dollar to be used for the input
00316         symlist: an array of symbols
00317         nsymlist: the number of symbols in symlist
00318         args[5]: The number of the dollar to be used for the output
00319         args[6]: Potentially other options.
00320 */
00321 /*
00322         DoPolynomialCanonicalize(BHEAD args[3],symlist,nsymlist,args[5],args[6]);
00323 */
00324         AT.WorkPointer = symlist;
00325     }
00326     return(0);
00327 }
00328
00329 /*
00330 #] DoCanonicalize :
00331 #[ GenTopologies :
00332
00333     This function has the syntax
00334         topologies_(nloops,      Number of loops
00335             nlegs,              Number of legs
00336             setvertexsizes,      A set which tells which vertices are allowed like {3,4}.
00337             set_extmomenta,      The name of a set with the external momenta
00338             set_intmomenta      The name of a set with the internal momenta
00339             [,options])
00340     The output will be using the built in functions vertex_ and edge_.
00341
00342     The test for whether this function can be evaluated is in TestSub (inside
00343     file proces.c) (search for the string TOPOLOGIES).
00344     This passes the code -15 in AN.TeInFun to Generator, which then calls
00345     the GenTopologies routine.
00346 */
00347
00348 #ifndef OLDTPO
00349
00350 int GenTopologies(PHEAD WORD *term,WORD level)
00351 {
00352     WORD *t1, *tt1, *tstop, *t, *tt;
00353     WORD *oldworkpointer = AT.WorkPointer;
00354     WORD option1 = 0, option2 = 0, setoption = -1;
00355     int retval;
00356 /*
00357
00358     We have to go through the testing procedure again, because there could
00359     be more than one topologies_ function and not all have to be expandable.
00360 */
00361     tstop = term+*term; tstop -= ABS(tstop[-1]);
00362     tt = term+1;
00363     while ( tt < tstop ) {
00364         t = tt; tt = t+t[1];
00365         if ( *t != TOPOLOGIES ) continue;
00366         tt = t + t[1]; t1 = t + FUNHEAD;
00367         if ( t1+10 > tt || *t1 != -SNUMBER || t1[1] < 0 ||          /* loops */
00368             t1[2] != -SNUMBER || ( t1[3] < 0 && t1[3] != -2 ) || /* legs */
00369             t1[4] != -SETSET || Sets[t1[5]].type != CNUMBER ||    /* set vertices */
00370             t1[6] != -SETSET || Sets[t1[7]].type != CVECTOR ||    /* outvectors */
00371             t1[8] != -SETSET || Sets[t1[9]].type != CVECTOR ) continue;
00372         tt1 = t1 + 10;
00373         if ( tt1+2 <= tt && tt1[0] == -SETSET ) {
00374             if ( Sets[t1[5]].last-Sets[t1[5]].first !=
00375                 Sets[tt1[1]].last-Sets[tt1[1]].first ) continue;
00376             setoption = tt1[1]; tt1 += 2;
00377         }
00378         if ( tt1+2 <= tt && tt1[0] == -SNUMBER ) { option1 = tt1[1]; tt1 += 2; }
00379         if ( tt1+2 <= tt && tt1[0] == -SNUMBER ) { option2 = tt1[1]; tt1 += 2; }

```

```

00380         AT.setinterntopo = t1[9];
00381         AT.setexterntopo = t1[7];
00382         AT.TopologiesTerm = term;
00383         AT.TopologiesStart = t;
00384         AT.TopologiesLevel = level;
00385         AT.TopologiesOptions[0] = option1;
00386         AT.TopologiesOptions[1] = option2;
00387         retval = GenerateTopologies(BHEAD t1[1],t1[3],t1[5],setoption);
00388         AT.WorkPointer = oldworkpointer;
00389         return(retval);
00390     }
00391     MLOCK(ErrorMessageLock);
00392     MesPrint("Internal error: topologies_ function not encountered.");
00393     MUNLOCK(ErrorMessageLock);
00394     return(-1);
00395 }
00396 }
00397
00398 #endif
00399
00400 /*
00401  #] GenTopologies :
00402  #[ DoTopologyCanonicalize :
00403
00404     term: The term
00405     vert: the vertex function
00406     edge: the edge function
00407     args[0]: the number of the output dollar
00408     args[1]: options
00409     return value should be zero if all is correct.
00410
00411     The external lines connect to an 'external vertex' which has only one line.
00412     The vertices are of a type: vertex_(p1,p2,-p3)*vertex_(p3,p4,p5) etc.
00413     The edges indicate noninteger powers of the lines:
00414         edge_(p1,2) means 1/p1.p1^(2*ep)
00415 */
00416
00417 int DoTopologyCanonicalize(PHEAD WORD *term,WORD vert,WORD edge,WORD *args)
00418 {
00419     int nvert = 0, nvert2, i, ii, jj, flipnames = 0, nparts/*, level, num */;
00420     WORD *tstop, *t, *tt, *tend, *td;
00421     WORD *oldworkpointer = AT.WorkPointer;
00422     WORD *termcopy = TermMalloc("TopologyCanonize1");
00423     WORD *vet= TermMalloc("TopologyCanonize2");
00424     WORD *partition, *environ, *connect, *pparts, *p;
00425 /*
00426     WORD *pparts;
00427 */
00428     WORD momenta[150],flips[50],nmomenta = 0, nflips = 0;
00429 /*
00430     Step one: the vertices should get a number. We copy the term for this.
00431     We need a high number for the vertex function to make sure
00432     that it comes after the edge function in the sorting.
00433 */
00434     if ( args[0] < args[1] ) { flipnames = 1; }
00435     tend = term + *term; tend -= ABS(tend[-1]); t = term+1; tt = termcopy+1;
00436     while ( t < tend ) {
00437         if ( *t == vert ) {
00438             for ( i = FUNHEAD; i < t[1]; i += 2 ) {
00439                 if ( t[i] == -VECTOR || ( t[i] == -INDEX && t[i+1] < 0 ) ) {
00440                     momenta[nmomenta++] = -VECTOR;
00441                     momenta[nmomenta++] = t[i+1];
00442                 }
00443                 else if ( t[i] == -MINVECTOR ) {
00444                     momenta[nmomenta++] = -MINVECTOR;
00445                     momenta[nmomenta++] = t[i+1];
00446                 }
00447                 else goto notgoodvertex;
00448                 momenta[nmomenta++] = nvert;
00449             }
00450             ii = FUNHEAD; i = t[1]-FUNHEAD;
00451             NCOPY(tt,t,ii)
00452             if ( flipnames ) tt[-FUNHEAD] = edge;
00453             tt[-FUNHEAD+1] += 2;
00454             *tt++ = -CNUMBER; *tt++ = nvert++;
00455         }
00456         else if ( *t == edge && flipnames ) {
00457             i = t[1] - 1; *tt++ = vert; t++;
00458         }
00459         else {
00460 notgoodvertex:
00461             i = t[1];
00462         }
00463         NCOPY(tt,t,i)
00464     }
00465     while ( t < tend ) *tt++ = *t++;
00466     termcopy[0] = tt - termcopy;

```

```

00467     if ( flipnames ) EXCH(edge,vert)
00468     nvert2 = nvert*nvert;
00469 /*
00470     Sort the momenta. Keep the sign order.
00471 */
00472     for ( i = 0; i < nmomenta-3; i+=3 ) {
00473         jj = i;
00474         while ( jj >= 0 && momenta[jj+4] > momenta[jj+1] ) {
00475             EXCH(momenta[jj+5],momenta[jj+2])
00476             EXCH(momenta[jj+4],momenta[jj+1])
00477             EXCH(momenta[jj+3],momenta[jj])
00478             jj -= 3;
00479         }
00480     }
00481 /*
00482     Step two: make now the edge functions in the proper notation.
00483 */
00484     t = vet+1;
00485     for ( i = 0; i < nmomenta; i += 6 ) {
00486         if ( momenta[i] == -VECTOR && momenta[i+3] == -MINVECTOR
00487             && momenta[i+1] == momenta[i+4] ) {
00488             }
00489         else if ( momenta[i] == -MINVECTOR && momenta[i+3] == -VECTOR
00490             && momenta[i+1] == momenta[i+4] ) {
00491             flips[nflips++] = momenta[i+1];
00492             DUMMYUSE(flips[nflips-1]);
00493         }
00494         else { /* something wrong with the momenta */
00495             MLOCK(ErrorMessageLock);
00496             MesPrint("No momentum conservation or wrong momenta in Canonicalize statement");
00497             MUNLOCK(ErrorMessageLock);
00498             Terminate(-1);
00499         }
00500         *t++ = EDGE; *t++ = FUNHEAD+10; FILLFUN(t)
00501         *t++ = -SNUMBER; *t++ = momenta[i+2];
00502         *t++ = -SNUMBER; *t++ = momenta[i+5];
00503         *t++ = -VECTOR; *t++ = momenta[i+1];
00504         *t++ = -SNUMBER; *t++ = 0; /* provisional power/color, multiple of ep */
00505         *t++ = -SNUMBER; *t++ = 0; /* provisional power/color, integer */
00506     }
00507     tend = t;
00508     *t++ = 1; *t++ = 1; *t++ = 3; vet[0] = t-vet; *t = 0;
00509 /*
00510     Now the powers of the denominators
00511 */
00512     tstop = termcopy+termcopy; tstop -= ABS(tstop[-1]); td = termcopy+1;
00513     while ( td < tstop ) {
00514         if ( *td == edge && td[1] == FUNHEAD+4 ) {
00515             if ( td[FUNHEAD+2] == -SNUMBER && ( td[FUNHEAD] == -VECTOR || td[FUNHEAD] == -INDEX
00516                 || td[FUNHEAD] == -MINVECTOR ) ) {}
00517             else {
00518                 MLOCK(ErrorMessageLock);
00519                 MesPrint("Illegal argument in edge function in Canonicalize statement");
00520                 MUNLOCK(ErrorMessageLock);
00521                 Terminate(-1);
00522             }
00523             tt = vet+1;
00524             while ( tt < tend ) {
00525                 if ( tt[FUNHEAD+5] == td[FUNHEAD+1] ) { tt[FUNHEAD+7] = td[FUNHEAD+3]; break; }
00526                 tt += tt[1];
00527             }
00528         }
00529         else if ( *td == DOTPRODUCT ) break;
00530         td += td[1];
00531     }
00532     if ( td < tstop ) {
00533         tt = vet+1;
00534         while ( tt < tend ) {
00535             /*
00536             tt[FUNHEAD+5] is a vector. We look for dotproducts with twice tt[FUNHEAD+5]
00537             */
00538             for ( i = 2; i < td[1]; i += 3 ) {
00539                 if ( td[i] == tt[FUNHEAD+5] && td[i+1] == tt[FUNHEAD+5] ) {
00540                     tt[FUNHEAD+9] = td[i+2];
00541                     break;
00542                 }
00543             }
00544             tt += tt[1];
00545         }
00546     }
00547     Normalize(BHEAD vet);
00548 /*
00549     Now we have a term `vet' in the proper notation and we can start.
00550     To keep track of the shattering we use an array of 2*nvert.
00551     each entry is Number,marker
00552     When the marker is zero, the vertices are in the same partition.
00553     For the environment we need a matrix that is nvert x nvert

```

```

00554     At the same time we keep the connectivity matrix, because that will
00555     save much time later.
00556     The partitions are stored in a matrix as well. This allows them to be
00557     treated as a stack. The entries are separated by 0 if they belong to
00558     the same part, and by a 1 when they belong to different parts.
00559 */
00560     partition = AT.WorkPointer; AT.WorkPointer += 2*nvert2;
00561     for ( i = 0; i < nvert; i++ ) { partition[2*i] = i; partition[2*i+1] = 0; }
00562     partition[2*i-1] = -1; /* end of the first part which is currently all vertices */
00563     nparts = 1;
00564
00565     connect = AT.WorkPointer; AT.WorkPointer += nvert2;
00566     for ( i = 0; i < nvert2; i++ ) connect[i] = 0;
00567     tstop = vet+vet; tstop -= ABS(tstop[-1]); t = vet+1;
00568     while ( t < tstop ) {
00569         if ( *t == EDGE ) {
00570             connect[t[FUNHEAD+1]*nvert+t[FUNHEAD+3]]++;
00571             connect[t[FUNHEAD+3]*nvert+t[FUNHEAD+1]]++;
00572         }
00573         t += t[1];
00574     }
00575     for ( i = 0; i < nvert; i++ ) {
00576 MesPrint("connectivity: %d -- %a",i,nvert,connect+i*nvert);
00577     }
00578 /*
00579     Create the environment matrix and sort it.
00580 */
00581     environ = AT.WorkPointer; AT.WorkPointer += nvert2;
00582 /*
00583     And now the refinement process starts.
00584 */
00585     WantAddPointers(nvert+1);
00586     for ( i = 0; i < nvert2; i++ ) environ[i] = 0;
00587 /* level = 0; */
00588     pparts = partition;
00589     while ( nparts < nvert ) {
00590         nparts = DoShattering(BHEAD connect,environ,pparts,nvert);
00591         if ( nparts < nvert ) { /* raise level and make a copy and split a part */
00592             p = pparts + 2*nvert;
00593             /* level++; */
00594             for ( i = 0; i < 2*nvert; i++ ) p[i] = pparts[i];
00595             for ( ii = 0; ii < 2*nvert; ii += 2 ) {
00596                 if ( p[ii+1] == 0 ) { /* found a part with more than one */
00597                     /* num = 2; */ i = ii+2;
00598                     while ( p[i+1] == 0 ) { /* num++; */ i += 2; }
00599                     p[ii+1] = -1; pparts = p;
00600                     break;
00601                 }
00602             }
00603         }
00604     }
00605 }
00606 MesPrint("partition: %d -- %a",nparts,2*nvert,pparts);
00607
00608 }
00609 /*
00610     Just for now
00611 */
00612     PutTermInDollar(vet,args[0]);
00613
00614
00615     TermFree(vet,"TopologyCanonize2");
00616     TermFree(termcopy,"TopologyCanonize1");
00617     AT.WorkPointer = oldworkpointer;
00618     return(0);
00619 }
00620
00621 /*
00622     #] DoTopologyCanonicalize :
00623     #[ DoShattering :
00624 */
00625
00626 int DoShattering(PHEAD WORD *connect, WORD *environ, WORD *partitions, WORD nvert)
00627 {
00628     int nparts, i, j, ii, jj, iii, jjj, newmarker;
00629     WORD **p = AT.pWorkSpace + AT.pWorkPointer, *part, *endpart;
00630     WORD *poin1, *poin2;
00631 #ifdef SHATBUG
00632 MesPrint("Entering DoShattering. partitions = %a",2*nvert,partitions);
00633 #endif
00634 restart:
00635 /*
00636     Determine the number of parts
00637     p will be an array with pointers to the parts.
00638     We made space for this array in the calling routine and because this
00639     routine is not calling any other routines we do not need to raise
00640     the pointer in this stack (AT.pWorkPointer).

```

```

00641 */
00642     nparts = 0; newmarker = 0;
00643     part = partitions; endpart = part + 2*nvert;
00644     p[0] = part;
00645     while ( part < endpart ) {
00646         if ( part[1] != 0 ) { p[+nparts] = part+2; }
00647         part += 2;
00648     }
00649     for ( i = 0; i < nparts; i++ )
00650         AT.WorkPointer[i] = (p[i+1]-p[i])/2;
00651 #ifdef SHATBUG
00652 MesPrint("DoShattering: calculated the pointers");
00653 MesPrint("DoShattering: sizes: %a", nparts, AT.WorkPointer);
00654 MesPrint("DoShattering: p[0]: %a, p[1]: %a", 6, p[0], 6, p[1]);
00655 #endif
00656     for ( i = 0; i < nparts; i++ ) {
00657         if ( AT.WorkPointer[i] > 1 ) {
00658             for ( j = 0; j < nparts; j++ ) {
00659 /*
00660             Shatter part i wrt part j.
00661             if there is action, go to restart.
00662 */
00663                 for ( ii = 0; ii < AT.WorkPointer[i]; ii++ ) {
00664                     for ( jj = 0; jj < AT.WorkPointer[j]; jj++ ) {
00665                         environ[ii*AT.WorkPointer[j]+jj] += connect[p[i][2*ii]*nvert+p[j][2*jj]];
00666                     }
00667                 }
00668 #ifdef SHATBUG
00669                 for ( ii = 0; ii < AT.WorkPointer[i]; ii++ ) {
00670                     MesPrint("Environ(%d,%d): %a", i, j, AT.WorkPointer[j], environ+ii*AT.WorkPointer[j]);
00671                 }
00672 #endif
00673 /*
00674             Sort the rows internally, then sort the rows wrt each other
00675             and finally place new markers. If a new marker, we restart.
00676             Don't forget to clean up the environ array.
00677 */
00678                 for ( ii = 0; ii < nvert; ii++ ) {
00679                     poin1 = environ+ii*AT.WorkPointer[j];
00680                     for ( jj = 0; jj < AT.WorkPointer[j]-1; jj++ ) {
00681                         jjj = jj;
00682                         while ( jjj >= 0 && poin1[jjj+1] > poin1[jjj] ) {
00683                             EXCH(poin1[jjj+1], poin1[jjj])
00684                             jjj--;
00685                         }
00686                     }
00687                 }
00688 #ifdef SHATBUG
00689                 for ( ii = 0; ii < AT.WorkPointer[i]; ii++ ) {
00690                     MesPrint("environ(%d,%d): %a", i, j, AT.WorkPointer[j], environ+ii*AT.WorkPointer[j]);
00691                 }
00692 #endif
00693                 for ( ii = 0; ii < AT.WorkPointer[i]-1; ii++ ) {
00694                     poin2 = environ+ii*AT.WorkPointer[j]; poin1 = poin2+AT.WorkPointer[j];
00695                     iii = ii;
00696                     while ( iii >= 0 && ( CmpArray(poin1, poin2, AT.WorkPointer[j]) < 0 ) ) {
00697                         EXCHN(poin2, poin1, AT.WorkPointer[j])
00698                         EXCH(p[i][2*iii+2], p[i][2*iii])
00699                         iii--; poin1 = poin2; poin2 = poin1-AT.WorkPointer[j];
00700                     }
00701                 }
00702 #ifdef SHATBUG
00703                 for ( ii = 0; ii < AT.WorkPointer[i]; ii++ ) {
00704                     MesPrint("environ(%d,%d): %a", i, j, AT.WorkPointer[j], environ+ii*AT.WorkPointer[j]);
00705                 }
00706                 MesPrint("partitions = %a", 2*nvert, partitions);
00707 #endif
00708                 for ( ii = 0; ii < AT.WorkPointer[i]-1; ii++ ) {
00709                     poin2 = environ+ii*AT.WorkPointer[j]; poin1 = poin2+AT.WorkPointer[j];
00710                     if ( CmpArray(poin1, poin2, AT.WorkPointer[j]) == 0 ) continue;
00711                     p[i][2*ii+1] = -1; nparts++; newmarker++;
00712                 }
00713 #ifdef SHATBUG
00714                 MesPrint("partitions = %a", 2*nvert, partitions);
00715 #endif
00716 /*
00717             Clear environ. This is probably faster than just clearing the whole array.
00718             Maybe in the future a test could be done on nvert to decide how to clear.
00719 */
00720                 for ( ii = 0; ii < AT.WorkPointer[i]; ii++ ) {
00721                     for ( jj = 0; jj < AT.WorkPointer[j]; jj++ ) {
00722                         environ[ii*AT.WorkPointer[j]+jj] = 0;
00723                     }
00724                 }
00725                 if ( newmarker ) { goto restart; }
00726             }
00727         }

```

```

00728     }
00729     return(nparts);
00730 }
00731
00732 /*
00733  #] DoShattering :
00734 */

```


4.23 diawrap.cc File Reference

```

#include "form3.h"
#include "grccparam.h"
#include "grcc.h"

```

Include dependency graph for diawrap.cc:

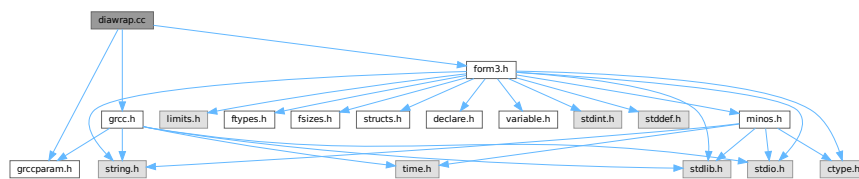

Data Structures

- struct [ToPoTyPe](#)

Macros

- #define [MAXPOINTS](#) 120
- #define [WITHEARLYVETO](#)
- #define [TOPO_MAXVERT](#) 10

Typedefs

- typedef struct [ToPoTyPe](#) [TOPOTYPE](#)

Functions

- int [LoadModel](#) ([MODEL](#) *m)
- int [ConvertParticle](#) ([Model](#) *model, int formnum)
- int [ReConvertParticle](#) ([Model](#) *model, int grccnum)
- int [numParticle](#) ([MODEL](#) *m, [WORD](#) n)
- Bool [fendMG](#) ([EGraph](#) *eg, void *ti)
- Bool [ProcessTopology](#) ([EGraph](#) *eg, void *ti)
- void [SetDualOpts](#) (int *opt, const [WORD](#) num, const int key, const char *key_name, const int dual, const char *dual_name, const int val, const int dval)
- int [GenDiagrams](#) ([PHEAD](#) [WORD](#) *term, [WORD](#) level)
- int [GenTopologies](#) ([PHEAD](#) [WORD](#) *term, [WORD](#) level)

4.23.1 Detailed Description

Functions with interface FORM with gcc, to implement the `diagrams_` function.

Definition in file [diawrap.cc](#).

4.23.2 Macro Definition Documentation

4.23.2.1 MAXPOINTS

```
#define MAXPOINTS 120
```

Definition at line 40 of file [diawrap.cc](#).

4.23.2.2 TOPO_MAXVERT

```
#define TOPO_MAXVERT 10
```

Definition at line 1011 of file [diawrap.cc](#).

4.23.3 Function Documentation

4.23.3.1 LoadModel()

```
int LoadModel (  
    MODEL * m )
```

Definition at line 57 of file [diawrap.cc](#).

4.23.3.2 ConvertParticle()

```
int ConvertParticle (  
    Model * model,  
    int formnum )
```

Definition at line 204 of file [diawrap.cc](#).

4.23.3.3 ReConvertParticle()

```
int ReConvertParticle (  
    Model * model,  
    int gccnum )
```

Definition at line 222 of file [diawrap.cc](#).

4.23.3.4 numParticle()

```
int numParticle (
    MODEL * m,
    WORD n )
```

Definition at line 234 of file [diawrap.cc](#).

4.23.3.5 fendMG()

```
Bool fendMG (
    EGraph * eg,
    void * ti )
```

Definition at line 492 of file [diawrap.cc](#).

4.23.3.6 ProcessTopology()

```
Bool ProcessTopology (
    EGraph * eg,
    void * ti )
```

Definition at line 502 of file [diawrap.cc](#).

4.23.3.7 SetDualOpts()

```
void SetDualOpts (
    int * opt,
    const WORD num,
    const int key,
    const char * key_name,
    const int dual,
    const char * dual_name,
    const int val,
    const int dval )
```

Definition at line 761 of file [diawrap.cc](#).

4.23.3.8 GenDiagrams()

```
int GenDiagrams (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 788 of file [diawrap.cc](#).

4.23.3.9 GenTopologies()

```
int GenTopologies (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1013 of file diawrap.cc.

4.24 diawrap.cc

[Go to the documentation of this file.](#)

```
00001
00005 /* #[ License : */
00006 /*
00007  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008  * When using this file you are requested to refer to the publication
00009  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010  * This is considered a matter of courtesy as the development was paid
00011  * for by FOM the Dutch physics granting agency and we would like to
00012  * be able to track its scientific use to convince FOM of its value
00013  * for the community.
00014  *
00015  * This file is part of FORM.
00016  *
00017  * FORM is free software: you can redistribute it and/or modify it under the
00018  * terms of the GNU General Public License as published by the Free Software
00019  * Foundation, either version 3 of the License, or (at your option) any later
00020  * version.
00021  *
00022  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025  * details.
00026  *
00027  * You should have received a copy of the GNU General Public License along
00028  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029  */
00030 /* #[ License : */
00031 // #[ Includes : diawrap.cc
00032
00033 extern "C" {
00034 #include "form3.h"
00035 }
00036
00037 #include "grccparam.h"
00038 #include "grcc.h"
00039
00040 #define MAXPOINTS 120
00041
00042 typedef struct ToPoTyPe {
00043     WORD *vert;
00044     WORD *vertmax;
00045     Options *opt;
00046     int cldeg[MAXPOINTS], clnum[MAXPOINTS], cleft[MAXPOINTS];
00047     int cmind[MAXLEGS+1], cmaxd[MAXLEGS+1];
00048     int ncl, nvert;
00049 } TOPOTYPE;
00050
00051 static void ProcessDiagram(EGraph *eg, void *ti);
00052 static int processVertex(TOPOTYPE *TopoInf, int pointsremaining, int level);
00053
00054 // #[ Includes :
00055 // #[ LoadModel :
00056
00057 int LoadModel(MODEL *m)
00058 {
00059 //
00060 // First check whether there was a model already.
00061 // In the Kaneko setup there can be only one at the same time.
00062 // Hence if there was one we need to remove it first.
00063 // Unless of course, it was already the model we want.
00064 //
00065 if ( m->grccmodel != NULL ) return(0);
00066
00067 int i,j,k;
00068 //
00069 // First the information that goes into the Model struct.
```

```

00070 // Note that new Model takes over (does not copy) minp.cnamlist.
00071 //
00072 MInput minp;
00073 PInput pinp;
00074 IInput iinp;
00075 if ( m->ncouplings > GRCC_MAXNCPLG ) {
00076     MesPrint("Too many coupling constants in model. Current limit is %d.", (WORD)GRCC_MAXNCPLG);
00077     MesPrint("Suggestion: recompile Form with a larger value for GRCC_MAXNCPLG");
00078     return(-1);
00079 }
00080 minp.defpart = GRCC_DEFBYCODE;
00081 minp.name = (char *) (m->name);
00082 minp.ncouple = m->ncouplings;
00083 for ( i = 0; i < GRCC_MAXNCPLG; i++ ) minp.cnamlist[i] = NULL;
00084 for ( i = 0; i < minp.ncouple; i++ )
00085     minp.cnamlist[i] = (char *) (VARNAME(symbols,m->couplings[i]));
00086 Model *mdl = new Model(&minp);
00087 //
00088 // Now the particles
00089 //
00090 for ( i = 0; i < m->nparticles; i++ ) {
00091     if ( minp.defpart == GRCC_DEFBYCODE ) {
00092         pinp.name = NULL;
00093         pinp.aname = NULL;
00094         pinp.pcode = m->vertices[i]->particles[0].number;
00095         pinp.acode = m->vertices[i]->particles[1].number;
00096         switch ( m->vertices[i]->particles[0].spin ) {
00097             case 1:
00098                 pinp.ptypec = GRCC_PT_Scalar;
00099                 break;
00100             case -1:
00101                 pinp.ptypec = GRCC_PT_Ghost;
00102                 break;
00103             case 2:
00104                 if ( m->vertices[i]->particles[0].type == 0 )
00105                     pinp.ptypec = GRCC_PT_Majorana;
00106                 else
00107                     pinp.ptypec = GRCC_PT_Undef;
00108                 break;
00109             case -2:
00110                 if ( m->vertices[i]->particles[0].type == 0 )
00111                     pinp.ptypec = GRCC_PT_Majorana;
00112                 else
00113                     pinp.ptypec = GRCC_PT_Dirac;
00114                 break;
00115             case 3:
00116                 pinp.ptypec = GRCC_PT_Vector;
00117                 break;
00118             default:
00119                 pinp.ptypec = GRCC_PT_Undef;
00120                 break;
00121         }
00122     }
00123     else {
00124         pinp.name = (char *) (VARNAME(functions,m->vertices[i]->particles[0].number));
00125         pinp.aname = (char *) (VARNAME(functions,m->vertices[i]->particles[1].number));
00126         switch ( m->vertices[i]->particles[0].spin ) {
00127             case 1:
00128                 pinp.ptypen = "scalar";
00129                 break;
00130             case -1:
00131                 pinp.ptypen = "ghost";
00132                 break;
00133             case 2:
00134                 if ( m->vertices[i]->particles[0].type == 0 )
00135                     pinp.ptypen = "majorana";
00136                 else
00137                     pinp.ptypen = "undef";
00138                 break;
00139             case -2:
00140                 if ( m->vertices[i]->particles[0].type == 0 )
00141                     pinp.ptypen = "majorana";
00142                 else
00143                     pinp.ptypen = "dirac";
00144                 break;
00145             case 3:
00146                 pinp.ptypen = "vector";
00147                 break;
00148             default:
00149                 pinp.ptypen = "undef";
00150                 break;
00151         }
00152     }
00153     pinp.extonly = m->vertices[i]->externonly;
00154     mdl->addParticle(&pinp);
00155 }
00156 mdl->addParticleEnd();

```

```

00157 //
00158 // Now the vertices
00159 //
00160 for ( i = m->nparticles; i < m->invertices; i++ ) {
00161     VERTEX *v = m->vertices[i];
00162     if ( minp.defpart == GRCC_DEFBYCODE ) {
00163         iinp.icode = NODEFUNCTION+i;
00164         iinp.name = NULL;
00165     }
00166     else {
00167         iinp.name = "node_";
00168     }
00169     iinp.nplistn = v->nparticles;
00170     for ( j = 0; j < iinp.nplistn; j++ ) {
00171         if ( minp.defpart == GRCC_DEFBYCODE ) {
00172             iinp.plistc[j] = v->particles[j].number;
00173         }
00174         else {
00175             iinp.plistn[j] = (char *) (VARNAME(functions,v->particles[j].number));
00176         }
00177     }
00178 //
00179 // We need a properly ordered list of coupling constants
00180 // The ordered list is in m->couplings.
00181 // For each vertex they are in v->couplings.
00182 //
00183 // iinp.cvallist = (int *)Malloc1(m->ncouplings*sizeof(int),"couplings");
00184
00185     for ( j = 0; j < m->ncouplings; j++ ) {
00186         iinp.cvallist[j] = 0;
00187         for ( k = 0; k < v->ncouplings; k += 2 ) {
00188             if ( v->couplings[k] == m->couplings[j] ) {
00189                 iinp.cvallist[j] = v->couplings[k+1];
00190                 break;
00191             }
00192         }
00193     }
00194     mdl->addInteraction(&iinp);
00195 }
00196 mdl->addInteractionEnd();
00197 m->grccmodel = (void *)mdl;
00198 return(0);
00199 }
00200
00201 // #] LoadModel :
00202 // #[ ConvertParticle :
00203
00204 int ConvertParticle(Model *model,int formnum)
00205 {
00206 //
00207 // Returns the grcc number of the particle, because grcc does not convert
00208 //
00209     int i;
00210     for ( i = 0; i < model->nParticles; i++ ) {
00211         if ( model->particles[i]->pcode == formnum ) { return(i); }
00212         else if ( model->particles[i]->acode == formnum ) { return(-i); }
00213     }
00214     MesPrint("Particle %d not found in model %s",formnum,model->name);
00215     Terminate(-1);
00216     return(0);
00217 }
00218
00219 // #] ConvertParticle :
00220 // #[ ReConvertParticle :
00221
00222 int ReConvertParticle(Model *model,int grccnum)
00223 {
00224 //
00225 // Returns the grcc number of the particle, because grcc does not convert
00226 //
00227     if ( grccnum < 0 ) { return(model->particles[-grccnum]->acode); }
00228     else { return(model->particles[grccnum]->pcode); }
00229 }
00230
00231 // #] ReConvertParticle :
00232 // #[ numParticle :
00233
00234 int numParticle(MODEL *m,WORD n)
00235 {
00236     int i;
00237     for ( i = 0; i < m->nparticles; i++ ) {
00238         if ( m->vertices[i]->particles[0].number == n ) return(i);
00239         if ( m->vertices[i]->particles[1].number == n ) return(i);
00240     }
00241     MesPrint("numParticle: particle %d not found in model",n);
00242     Terminate(-1);
00243     return(-1);

```

```

00244 }
00245
00246 // #] numParticle :
00247 // #[ ProcessDiagram :
00248
00249 void ProcessDiagram(EGraph *eg, void *ti)
00250 {
00251 //
00252 // This is the routine that gets a complete diagram and passes it on
00253 // to Form (Generator) for further algebraic manipulations.
00254 // The term is picked up from AT.dia term and a new term is constructed
00255 // in the workspace.
00256 //
00257 GETIDENTITY
00258 TERMINFO *info = (TERMINFO *)ti;
00259
00260 if ( ( info->flags & TOPOLOGIESONLY ) == TOPOLOGIESONLY ) return;
00261
00262 WORD *term = info->term, *newterm, *oldworkpointer = AT.WorkPointer;
00263 WORD *tdia = term + info->diaoffset;
00264 WORD *tail = tdia + tdia[1];
00265 WORD *tend = term + *term;
00266 WORD *fill, *startfill, *cfill, *afill;
00267 int i, j, intr;
00268 Model *model = (Model *)info->currentModel;
00269 MODEL *m = (MODEL *)info->currentMODEL;
00270 int numlegs, vect, edge;
00271
00272 newterm = term + *term;
00273 for ( i = 1; i < info->diaoffset; i++ ) newterm[i] = term[i];
00274 fill = newterm + info->diaoffset;
00275 //
00276 // Now get the nodes
00277 //
00278 if ( ( info->flags & WITHOUTNODES ) == 0 ) {
00279     for ( i = 0; i < eg->nNodes; i++ ) {
00280 //
00281 //         node_(number,coupling,particle_1(momentum_1),...,particle_n(momentum_n))
00282 //
00283         numlegs = eg->nodes[i]->deg;
00284         startfill = fill;
00285         *fill++ = NODEFUNCTION;
00286         *fill++ = 0;
00287         FILLFUN(fill)
00288         *fill++ = -SNUMBER; *fill++ = i+1;
00289 //
00290 // Now we put the coupling constants. This is done inside the
00291 // function for when we want to work with counterterms.
00292 //
00293         if ( !eg->isExternal(i) ) {
00294             afill = fill; *fill++ = 0; *fill++ = 1; FILLARG(fill)
00295             cfill = fill; *fill++ = 0;
00296             intr = eg->nodes[i]->intrct;
00297             for ( j = 0; j < model->interacts[intr]->nclist; j++ ) {
00298                 if ( model->interacts[intr]->clist[j] != 0 ) {
00299                     *fill++ = SYMBOL; *fill++ = 4;
00300                     *fill++ = m->couplings[j];
00301                     *fill++ = model->interacts[intr]->clist[j];
00302                 }
00303             }
00304             *fill++ = 1; *fill++ = 1; *fill++ = 3;
00305             *cfill = fill - cfill;
00306             *afill = fill - afill;
00307         }
00308         else {
00309             *fill++ = -SNUMBER;
00310             *fill++ = 1;
00311         }
00312 //
00313 // Now the particles and their momenta.
00314 //
00315         for ( j = 0; j < numlegs; j++ ) {
00316             *fill++ = ARGHEAD+FUNHEAD+6;
00317             *fill++ = 0;
00318             FILLARG(fill)
00319             edge = eg->nodes[i]->edges[j];
00320             vect = ABS(edge)-1;
00321             *fill++ = 6+FUNHEAD;
00322             int a;
00323             if ( edge < 0 ) { a = ReConvertParticle(model,-eg->edges[vect]->ptcl); }
00324             else { a = ReConvertParticle(model,eg->edges[vect]->ptcl); }
00325             *fill++ = a;
00326             *fill++ = FUNHEAD+2;
00327             FILLFUN(fill)
00328             *fill++ = edge < 0 ? -MINVECTOR : -VECTOR;
00329             if ( numlegs == 1 || vect < info->numextern ) { // Look up in set of external momenta
00330                 *fill++ = SetElements[Sets[info->externalset].first+vect];

```

```

00331         }
00332         else { // Look up in set of internal momenta set
00333             *fill++ = SetElements[Sets[info->internalset].first+(vect-eg->nExtern)];
00334         }
00335         *fill++ = 1; *fill++ = 1; *fill++ = 3;
00336     }
00337     startfill[1] = fill-startfill;
00338 }
00339 }
00340 if ( ( info->flags & WITHEDGES ) == WITHEDGES ) {
00341     for ( i = 0; i < eg->nEdges; i++ ) {
00342         int n1 = eg->edges[i]->nodes[0];
00343         int n2 = eg->edges[i]->nodes[1];
00344         // int l1 = eg->edges[i]->nlegs[0];
00345         // int l2 = eg->edges[i]->nlegs[1];
00346
00347         startfill = fill;
00348         *fill++ = EDGE;
00349         *fill++ = 0;
00350         FILLFUN(fill)
00351         *fill++ = -SNUMBER; *fill++ = i+1; // number of the edge
00352     //
00353         *fill++ = ARGHEAD+FUNHEAD+6;
00354         *fill++ = 0;
00355         FILLARG(fill)
00356         *fill++ = 6+FUNHEAD;
00357         int a = ReConvertParticle(model, eg->edges[i]->ptcl);
00358         *fill++ = a;
00359         *fill++ = FUNHEAD+2;
00360         FILLFUN(fill)
00361         *fill++ = -VECTOR;
00362         // Look up in set of internal momenta set
00363         if ( i < info->numextern ) { // Look up in set of external momenta
00364             *fill++ = SetElements[Sets[info->externalset].first+i];
00365         }
00366         else { // Look up in set of internal momenta set
00367             *fill++ = SetElements[Sets[info->internalset].first+(i-eg->nExtern)];
00368         }
00369         *fill++ = 1; *fill++ = 1; *fill++ = 3;
00370     //
00371         *fill++ = -SNUMBER; *fill++ = n1+1; // number of the node from
00372         *fill++ = -SNUMBER; *fill++ = n2+1; // number of the node to
00373         startfill[1] = fill - startfill;
00374     }
00375 }
00376 if ( ( info->flags & WITHBLOCKS ) == WITHBLOCKS ) {
00377     for ( i = 0; i < eg->econn->nblocks; i++ ) {
00378         startfill = fill;
00379         *fill++ = BLOCK;
00380         *fill++ = 0;
00381         FILLFUN(fill);
00382         *fill++ = -SNUMBER;
00383         *fill++ = i+1;
00384         *fill++ = -SNUMBER;
00385         *fill++ = eg->econn->blocks[i].loop;
00386     //
00387     // Now we have to make a list of all nodes inside this block
00388     //
00389     int bnodes[GRCC_MAXNODES], k;
00390     WORD *argfill = fill, *funfill;
00391     *fill++ = 0; *fill++ = 0; FILLARG(fill)
00392     *fill++ = 0;
00393     for ( k = 0; k < GRCC_MAXNODES; k++ ) bnodes[k] = 0;
00394     for ( k = 0; k < eg->econn->blocks[i].nmedges; k++ ) {
00395         bnodes[eg->econn->blocks[i].edges[k][0]] = 1;
00396         bnodes[eg->econn->blocks[i].edges[k][1]] = 1;
00397     }
00398     for ( k = 0; k < GRCC_MAXNODES; k++ ) {
00399         if ( bnodes[k] == 0 ) continue;
00400     //
00401     // Now we put the node inside this argument.
00402     //
00403         funfill = fill;
00404         *fill++ = NODEFUNCTION;
00405         *fill++ = 0;
00406         FILLFUN(fill)
00407         *fill++ = -SNUMBER; *fill++ = k+1;
00408         numlegs = eg->nodes[k]->deg;
00409         for ( j = 0; j < numlegs; j++ ) {
00410             edge = eg->nodes[k]->edges[j];
00411             vect = ABS(edge)-1;
00412             *fill++ = -VECTOR;
00413             if ( numlegs == 1 || vect < info->numextern ) { // Look up in set of external
momenta
00414                 *fill++ = SetElements[Sets[info->externalset].first+vect];
00415             }
00416             else { // Look up in set of internal momenta set

```

```

00417         *fill++ = SetElements[Sets[info->internalset].first+(vect-info->numextern)];
00418     }
00419     }
00420     funfill[1] = fill-funfill;
00421 }
00422 *fill++ = 1; *fill++ = 1; *fill++ = 3;
00423 *argfill = fill - argfill;
00424 argfill[ARGHEAD] = argfill[0] - ARGHEAD;
00425 startfill[1] = fill-startfill;
00426 }
00427 }
00428 if ( ( info->flags & WITHONEPISETS ) == WITHONEPISETS ) {
00429     for ( i = 0; i < eg->econn->nopic; i++ ) {
00430         startfill = fill;
00431         *fill++ = ONEPI;
00432         *fill++ = 0;
00433         FILLFUN(fill);
00434         *fill++ = -SNUMBER;
00435         *fill++ = i+1;
00436         *fill++ = -ONEPI;
00437         for ( j = 0; j < eg->econn->opics[i].nnodes; j++ ) {
00438             *fill++ = -SNUMBER;
00439             *fill++ = eg->econn->opics[i].nodes[j]+1;
00440         }
00441         startfill[1] = fill-startfill;
00442     }
00443 }
00444 //
00445 // Topology counter. We have exaggerated a bit with the eye on the far future.
00446 //
00447 if ( info->numtopo-1 < MAXPOSITIVE ) {
00448     *fill++ = TOPO; *fill++ = FUNHEAD+2; FILLFUN(fill)
00449     *fill++ = -SNUMBER; *fill++ = (WORD)(info->numtopo-1);
00450 }
00451 else if ( info->numtopo-1 < FULLMAX-1 ) {
00452     *fill++ = TOPO; *fill++ = FUNHEAD+ARGHEAD+4; FILLFUN(fill)
00453     *fill++ = ARGHEAD+4; *fill++ = 0; FILLARG(fill)
00454     *fill++ = 4;
00455     *fill++ = (WORD)((info->numtopo-1) & WORDMASK);
00456     *fill++ = 1; *fill++ = 3;
00457 }
00458 else { // for now: science fiction
00459     *fill++ = TOPO; *fill++ = FUNHEAD+ARGHEAD+6; FILLFUN(fill)
00460     *fill++ = ARGHEAD+6; *fill++ = 0; FILLARG(fill)
00461     *fill++ = 6; *fill++ = (WORD)((info->numtopo-1) » BITSINWORD);
00462     *fill++ = (WORD)((info->numtopo-1) & WORDMASK);
00463     *fill++ = 0; *fill++ = 1; *fill++ = 5;
00464 }
00465 //
00466 // Symmetry factors. We let Normalize do the multiplication.
00467 //
00468 if ( eg->nsym != 1 ) {
00469     *fill++ = SNUMBER; *fill++ = 4; *fill++ = (WORD)eg->nsym; *fill++ = -1;
00470 }
00471 if ( eg->esym != 1 ) {
00472     *fill++ = SNUMBER; *fill++ = 4; *fill++ = (WORD)eg->esym; *fill++ = -1;
00473 }
00474 if ( eg->extperm != 1 ) {
00475     *fill++ = SNUMBER; *fill++ = 4; *fill++ = (WORD)eg->extperm; *fill++ = 1;
00476 }
00477 //
00478 // finish it off
00479 //
00480 while ( tail < tend ) *fill++ = *tail++;
00481 if ( eg->fsign < 0 ) fill[-1] = -fill[-1];
00482 *newterm = fill - newterm;
00483 AT.WorkPointer = fill;
00484
00485 Generator(BHEAD newterm,info->level);
00486 AT.WorkPointer = oldworkpointer;
00487 }
00488
00489 // #] ProcessDiagram :
00490 // #[ fendMG :
00491
00492 Bool fendMG(EGraph *eg, void *ti)
00493 {
00494     DUMMYUSE(eg);
00495     DUMMYUSE(ti);
00496     return True;
00497 }
00498
00499 // #] fendMG :
00500 // #[ ProcessTopology :
00501
00502 Bool ProcessTopology(EGraph *eg, void *ti)
00503 {

```

```

00504 //
00505 // This routine is called for each new topology.
00506 // New convention: return True; generate the corresponding diagrams if needed
00507 // return False; skip diagram generation (when asked for).
00508 //
00509     TERMINFO *info = (TERMINFO *)ti;
00510
00511 // This seems to work properly. It was disabled before.
00512 #define WITHEARLYVETO
00513 #ifndef WITHEARLYVETO
00514     if ( ( info->flags & CHECKEXTERN ) == CHECKEXTERN ) && info->currentMODEL != NULL ) {
00515         int i, j;
00516         int numlegs, vect, edge;
00517         for ( i = 0; i < eg->nNodes; i++ ) {
00518             if ( eg->isExternal(i) ) continue;
00519             numlegs = eg->nodes[i]->deg;
00520             for ( j = 0; j < numlegs; j++ ) {
00521                 edge = eg->nodes[i]->edges[j];
00522                 vect = ABS(edge)-1;
00523                 if ( vect < info->numextern && info->legcouple[vect][numlegs] == 0 ) {
00524
00525                     // This cannot be.
00526
00527                     info->numtopo++;
00528                     return False;
00529                 }
00530             }
00531         }
00532     }
00533 #endif
00534
00535     if ( ( info->flags & TOPOLOGIESONLY ) == 0 ) {
00536         info->numtopo++;
00537         return True;
00538     }
00539 //
00540 // Now we are just generating topologies.
00541 //
00542     GETIDENTITY
00543     WORD *term = info->term, *newterm, *oldworkpointer = AT.WorkPointer;
00544     WORD *tdia = term + info->diaoffset;
00545     WORD *tail = tdia + tdia[1];
00546     WORD *tend = term + *term;
00547     WORD *fill, *startfill;
00548     Model *model = (Model *)info->currentModel;
00549     MODEL *m = (MODEL *)info->currentMODEL;
00550     int i, j;
00551     int numlegs, vect, edge;
00552
00553     newterm = term + *term;
00554     for ( i = 1; i < info->diaoffset; i++ ) newterm[i] = term[i];
00555     fill = newterm + info->diaoffset;
00556 //
00557 // Now get the nodes
00558 //
00559     for ( i = 0; i < eg->nNodes; i++ ) {
00560 //
00561 //         node_(number,momentum_1,...,momentum_n)
00562 //
00563         numlegs = eg->nodes[i]->deg;
00564         startfill = fill;
00565         *fill++ = NODEFUNCTION;
00566         *fill++ = 0;
00567         FILLFUN(fill)
00568         *fill++ = -SNUMBER; *fill++ = i+1;
00569         if ( model != NULL && m != NULL ) {
00570             if ( !eg->isExternal(i) ) {
00571                 WORD *afill = fill; *fill++ = 0; *fill++ = 1; FILLARG(fill)
00572                 WORD *cfill = fill; *fill++ = 0;
00573                 int cpl = 2*eg->nodes[i]->extloop+eg->nodes[i]->deg-2;
00574                 *fill++ = SYMBOL; *fill++ = 4;
00575                 *fill++ = m->couplings[0];
00576                 *fill++ = cpl;
00577                 *fill++ = 1; *fill++ = 1; *fill++ = 3;
00578                 *cfill = fill - cfill;
00579                 *afill = fill - afill;
00580                 if ( *afill == ARGHEAD+8 && afill[ARGHEAD+4] == 1 ) {
00581                     fill = afill; *fill++ = -SYMBOL; *fill++ = afill[ARGHEAD+3];
00582                 }
00583             }
00584             else {
00585                 *fill++ = -SNUMBER;
00586                 *fill++ = 1;
00587             }
00588         }
00589 //
00590 //         Now the momenta.

```



```

00591 //
00592     for ( j = 0; j < numlegs; j++ ) {
00593         edge = eg->nTimer[i]->edges[j];
00594         vect = ABS(edge)-1;
00595         *fill++ = edge < 0 ? -MINVECTOR: -VECTOR;
00596         if ( numlegs == 1 || vect < info->numextern ) { // Look up in set of external momenta
00597             *fill++ = SetElements[Sets[info->externalset].first+vect];
00598         }
00599         else { // Look up in set of internal momenta set
00600             *fill++ = SetElements[Sets[info->internalset].first+(vect-info->numextern)];
00601         }
00602     }
00603     startfill[1] = fill-startfill;
00604 }
00605 if ( ( info->flags & WITHEDGES ) == WITHEDGES ) {
00606     for ( i = 0; i < eg->nEdges; i++ ) {
00607         int n1 = eg->edges[i]->nTimer[0];
00608         int n2 = eg->edges[i]->nTimer[1];
00609         // int l1 = eg->edges[i]->nlegs[0];
00610         // int l2 = eg->edges[i]->nlegs[1];
00611         startfill = fill;
00612         *fill++ = EDGE;
00613         *fill++ = 0;
00614         FILLFUN(fill)
00615         *fill++ = -SNUMBER; *fill++ = i+1; // number of the edge
00616         //
00617         *fill++ = -VECTOR;
00618         if ( i < info->numextern ) { // Look up in set of external momenta
00619             *fill++ = SetElements[Sets[info->externalset].first+i];
00620         }
00621         else { // Look up in set of internal momenta set
00622             *fill++ = SetElements[Sets[info->internalset].first+(i-eg->nExtern)];
00623         }
00624         //
00625         *fill++ = -SNUMBER; *fill++ = n1+1; // number of the node from
00626         *fill++ = -SNUMBER; *fill++ = n2+1; // number of the node to
00627         startfill[1] = fill - startfill;
00628     }
00629 }
00630 //
00631 // Block information
00632 //
00633 if ( ( info->flags & WITHBLOCKS ) == WITHBLOCKS ) {
00634     for ( i = 0; i < eg->econn->nblocks; i++ ) {
00635         startfill = fill;
00636         *fill++ = BLOCK;
00637         *fill++ = 0;
00638         FILLFUN(fill);
00639         *fill++ = -SNUMBER;
00640         *fill++ = i+1;
00641         *fill++ = -SNUMBER;
00642         *fill++ = eg->econn->blocks[i].loop;
00643         //
00644         // Now we have to make a list of all nodes inside this block
00645         //
00646         int bnTimer[GRCC_MAXNODES], k;
00647         WORD *argfill = fill, *funfill;
00648         *fill++ = 0; *fill++ = 0; FILLARG(fill)
00649         *fill++ = 0;
00650         for ( k = 0; k < GRCC_MAXNODES; k++ ) bnTimer[k] = 0;
00651         for ( k = 0; k < eg->econn->blocks[i].nedges; k++ ) {
00652             bnTimer[eg->econn->blocks[i].edges[k][0]] = 1;
00653             bnTimer[eg->econn->blocks[i].edges[k][1]] = 1;
00654         }
00655         for ( k = 0; k < GRCC_MAXNODES; k++ ) {
00656             if ( bnTimer[k] == 0 ) continue;
00657             //
00658             // Now we put the node inside this argument.
00659             //
00660             funfill = fill;
00661             *fill++ = NODEFUNCTION;
00662             *fill++ = 0;
00663             FILLFUN(fill)
00664             *fill++ = -SNUMBER; *fill++ = k+1;
00665             numlegs = eg->nTimer[k]->deg;
00666             for ( j = 0; j < numlegs; j++ ) {
00667                 edge = eg->nTimer[k]->edges[j];
00668                 vect = ABS(edge)-1;
00669                 *fill++ = -VECTOR;
00670                 if ( numlegs == 1 || vect < info->numextern ) { // Look up in set of external
momenta
00671                     *fill++ = SetElements[Sets[info->externalset].first+vect];
00672                 }
00673                 else { // Look up in set of internal momenta set
00674                     *fill++ = SetElements[Sets[info->internalset].first+(vect-info->numextern)];
00675                 }
00676             }
00677         }
00678     }
00679 }

```

```

00677         funfill[1] = fill-funfill;
00678     }
00679     *fill++ = 1; *fill++ = 1; *fill++ = 3;
00680     *argfill = fill - argfill;
00681     argfill[ARGHEAD] = argfill[0] - ARGHEAD;
00682     startfill[1] = fill-startfill;
00683 }
00684
00685 // if ( eg->econn->narticuls > 0 ) {
00686 //     startfill = fill;
00687 //     *fill++ = BLOCK;
00688 //     *fill++ = 0;
00689 //     FILLFUN(fill);
00690 //     for ( i = 0; i < eg->econn->snodes; i++ ) {
00691 //         if ( eg->econn->articuls[i] != 0 ) {
00692 //             *fill++ = -SNUMBER;
00693 //             *fill++ = i+1;
00694 //         }
00695 //     }
00696 //     startfill[1] = fill-startfill;
00697 // }
00698 }
00699 if ( ( info->flags & WITHONEPISETS ) == WITHONEPISETS ) {
00700     for ( i = 0; i < eg->econn->nopic; i++ ) {
00701         startfill = fill;
00702         *fill++ = ONEPI;
00703         *fill++ = 0;
00704         FILLFUN(fill);
00705         *fill++ = -SNUMBER;
00706         *fill++ = i+1;
00707         *fill++ = -ONEPI;
00708         for ( j = 0; j < eg->econn->opics[i].nnodes; j++ ) {
00709             *fill++ = -SNUMBER;
00710             *fill++ = eg->econn->opics[i].nodes[j]+1;
00711         }
00712         startfill[1] = fill-startfill;
00713     }
00714 }
00715 //
00716 // Topology counter. We have exaggerated a bit with the eye on the far future.
00717 //
00718 if ( info->numtopo < MAXPOSITIVE ) {
00719     *fill++ = TOPO; *fill++ = FUNHEAD+2; FILLFUN(fill)
00720     *fill++ = -SNUMBER; *fill++ = (WORD)(info->numtopo);
00721 }
00722 else if ( info->numtopo < FULLMAX-1 ) {
00723     *fill++ = TOPO; *fill++ = FUNHEAD+ARGHEAD+4; FILLFUN(fill)
00724     *fill++ = ARGHEAD+4; *fill++ = 0; FILLARG(fill)
00725     *fill++ = 4;
00726     *fill++ = (WORD)(info->numtopo & WORDMASK);
00727     *fill++ = 1; *fill++ = 3;
00728 }
00729 else { // for now: science fiction
00730     *fill++ = TOPO; *fill++ = FUNHEAD+ARGHEAD+6; FILLFUN(fill)
00731     *fill++ = ARGHEAD+6; *fill++ = 0; FILLARG(fill)
00732     *fill++ = 6; *fill++ = (WORD)(info->numtopo » BITSINWORD);
00733     *fill++ = (WORD)(info->numtopo & WORDMASK);
00734     *fill++ = 0; *fill++ = 1; *fill++ = 5;
00735 }
00736 //
00737 // Symmetry factors. We let Normalize do the multiplication.
00738 //
00739 if ( eg->nsym != 1 ) {
00740     *fill++ = SNUMBER; *fill++ = 4; *fill++ = (WORD)eg->nsym; *fill++ = -1;
00741 }
00742 if ( eg->esym != 1 ) {
00743     *fill++ = SNUMBER; *fill++ = 4; *fill++ = (WORD)eg->esym; *fill++ = -1;
00744 }
00745 //
00746 // finish it off
00747 //
00748 while ( tail < tend ) *fill++ = *tail++;
00749 if ( eg->fsgn < 0 ) fill[-1] = -fill[-1];
00750 *newterm = fill - newterm;
00751 AT.WorkPointer = fill;
00752
00753 Generator(BHEAD newterm,info->level);
00754 AT.WorkPointer = oldworkpointer;
00755 info->numtopo++;
00756 return False;
00757 }
00758
00759 // #] ProcessTopology :
00760 // #[ SetDualOpts :
00761 void SetDualOpts(int *opt, const WORD num, const int key, const char* key_name,
00762     const int dual, const char* dual_name, const int val, const int dval) {
00763

```

```

00764     if ( ( num & key ) == key ) {
00765         if ( ( num & dual ) == dual ) {
00766             MLOCK(ErrorMessageLock);
00767             MesPrint("&Conflicting diagram filters: %s and %s.", key_name, dual_name);
00768             MUNLOCK(ErrorMessageLock);
00769             Terminate(-1);
00770         }
00771         else {
00772             *opt = val;
00773         }
00774     }
00775     else {
00776         if ( ( num & dual ) == dual ) {
00777             *opt = dval;
00778         }
00779         else {
00780             // The default value is always 0.
00781             *opt = 0;
00782         }
00783     }
00784 }
00785 // #] SetDualOpts :
00786 // #[ GenDiagrams :
00787
00788 int GenDiagrams(PHEAD WORD *term, WORD level)
00789 {
00790     Model *model;
00791     MODEL *m;
00792     Options *opt;
00793     Process *proc;
00794     int pid = 1, x;
00795     int babble = 0;    // Later we may set this at the FORM code level
00796     TERMINFO info;
00797     WORD inset,outset,*coupl,setnum,optionnumber = 0;
00798     int i, j, cpl[GRCC_MAXNCPLG];
00799     int ninitl, initlPart[GRCC_MAXLEGS], nfinal, finalPart[GRCC_MAXLEGS];
00800     for ( i = 0; i < GRCC_MAXNCPLG; i++ ) cpl[i] = 0;
00801 //
00802 // Here we create an object of type Option and load it up.
00803 // Next we run the diagram generation on it.
00804 //
00805     info.term = term;
00806     info.level = level;
00807     info.diaoffset = AR.funoffset;
00808     info.externalset = term[info.diaoffset+FUNHEAD+7];
00809     info.internalset = term[info.diaoffset+FUNHEAD+9];
00810     info.flags = 0;
00811     inset = term[info.diaoffset+FUNHEAD+3];
00812     outset = term[info.diaoffset+FUNHEAD+5];
00813     coupl = term + info.diaoffset + FUNHEAD + 10;
00814     if ( *coupl < 0 ) {
00815         if ( term[info.diaoffset+1] > FUNHEAD + 12 ) {
00816             optionnumber = term[info.diaoffset+FUNHEAD+13];
00817         }
00818     }
00819     else {
00820         if ( term[info.diaoffset+1] > *coupl+FUNHEAD+10 )
00821             optionnumber = term[info.diaoffset+*coupl+FUNHEAD+11];
00822     }
00823     setnum = term[info.diaoffset+FUNHEAD+1];
00824
00825     m = AC.models[SetElements[Sets[setnum].first]];
00826     LoadModel(m);
00827     model = (Model *)m->grccmodel;
00828
00829     info.currentModel = (void *)model;
00830     info.currentMODEL = (void *)m;
00831     info.numdia = 0;
00832     info.numtopo = 1;
00833     info.flags = optionnumber;
00834
00835     opt = new Options();
00836
00837     opt->setOutAG(ProcessDiagram, &info);
00838     opt->setOutMG(ProcessTopology, &info);
00839
00840     opt->values[GRCC_OPT_SymmInitial] = ( optionnumber & WITHSYMMETRIZEI ) == WITHSYMMETRIZEI;
00841     opt->values[GRCC_OPT_SymmFinal] = ( optionnumber & WITHSYMMETRIZEF ) == WITHSYMMETRIZEF;
00842
00843     // WITHBLOCKS controls output formatting. We could introduce an extra filtering option
00844     // corresponding to GRCC_OPT_Block, which is somewhat like Qgraf "onevi" but not quite
00845     // the same currently.
00846     //opt->values[GRCC_OPT_Block] = ;
00847
00848     // Now the "qgraf-compatible filtering options":
00849     int qgopt[GRCC_QGRAF_OPT_Size];
00850     SetDualOpts(&qgopt[GRCC_QGRAF_OPT_ONEPI], optionnumber,ONEPARTI, "ONEPI_", ONEPARTR,

```

```

    "ONEPR_", 1,-1);
00851 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_ONSHELL], optionnumber,ONSHELL, "ONSHELL_", OFFSHELL,
    "OFFSHELL_", 1,-1);
00852 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_NOSIGMA], optionnumber,NOSIGMA, "NOSIGMA_", SIGMA,
    "SIGMA_", 1,-1);
00853 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_NOSNAIL], optionnumber,NOSNAIL, "NOSNAIL_", SNAIL,
    "SNAIL_", 1,-1);
00854 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_NOTADPOLE],optionnumber,NOTADPOLE,"NOTADPOLE_",TADPOLE ,
    "TADPOLE_", 1,-1);
00855 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_SIMPLE], optionnumber,SIMPLE, "SIMPLE_",
    NOTSIMPLE,"NOTSIMPLE_",1,-1);
00856 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_BIPART], optionnumber,BIPART, "BIPART_",
    NONBIPART,"NONBIPART_",1,-1);
00857 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_CYCLI], optionnumber,CYCLI, "CYCLI_", CYCLR,
    "CYCLR_", 1,-1);
00858 SetDualOpts(&qgopt[GRCC_QGRAF_OPT_FLOOP], optionnumber,FLOOP, "FLOOP_", NOTFLOOP,
    "NOTFLOOP_", 1,-1);
00859 // Now set the options internally:
00860 opt->setQGrafOpt(qgopt);
00861
00862 opt->setOutputF(False,"");
00863 opt->setOutputP(False,"");
00864 opt->printLevel(babble);
00865
00866 // Load the various arrays.
00867 ninitl = Sets[inset].last - Sets[inset].first;
00868 for ( i = 0; i < ninitl; i++ ) {
00869     x = SetElements[Sets[inset].first+i];
00870     initlPart[i] = ConvertParticle(model,x);
00871     info.legcouple[i] = m->vertices[numParticle(m,x)]->couplings;
00872 }
00873 nfinal = Sets[outset].last - Sets[outset].first;
00874 for ( i = 0; i < nfinal; i++ ) {
00875     x = SetElements[Sets[outset].first+i];
00876     finalPart[i] = ConvertParticle(model,x);
00877     info.legcouple[i+ninitl] = m->vertices[numParticle(m,x)]->couplings;
00878 }
00879 info.numextern = ninitl + nfinal;
00880 for ( i = 2; i <= MAXLEGS; i++ ) {
00881     if ( m->legcouple[i] == 1 ) {
00882         for ( j = 0; j < info.numextern; j++ ) {
00883             if ( info.legcouple[j][i] == 0 ) { info.flags |= CHECKEXTERN; goto Go_on; }
00884         }
00885     }
00886 }
00887 Go_on;;
00888 //
00889 // Now we have to sort out the coupling constants.
00890 // The argument at coupl can be of type -SNUMBER, -SYMBOL or generic
00891 // It has however already be tested for syntax.
00892 // Note that one cannot have 1 for the coupling constants.
00893 // In that case one should select 0 loops or something equivalent.
00894 //
00895 if ( *coupl == -SNUMBER ) { // Number of loops
00896 //
00897 // This is the complicated case.
00898 // We have to compute the number of coupling constants and then
00899 // generate diagrams for all combinations with the proper power.
00900 //
00901 int nc = coupl[1]*2 + ninitl + nfinal - 2;
00902 int *scratch = (int *)Malloca(nc*sizeof(int),"DistrN");
00903 scratch[0] = -2; // indicating startup cq first call.
00904
00905 if ( ( info.flags & TOPOLOGIESONLY ) == 0 ) {
00906     while ( DistrN(nc,cpl,m->ncouplings,scratch) ) {
00907         proc = new Process(pid, model, opt, ninitl, initlPart, nfinal, finalPart, cpl);
00908         delete proc;
00909         info.numtopo = 1;
00910     }
00911 }
00912 else {
00913     cpl[0] = nc;
00914     proc = new Process(pid, model, opt, ninitl, initlPart, nfinal, finalPart, cpl);
00915     delete proc;
00916 }
00917 M_free(scratch,"DistrN");
00918 opt->end();
00919 delete opt;
00920 return(0);
00921 }
00922 else if ( *coupl == -SYMBOL ) { // Just a single power of one constant
00923     for ( i = 0; i < m->ncouplings; i++ ) {
00924         if ( m->couplings[i] == coupl[1] ) {
00925             cpl[i] = 1;
00926             break;
00927         }
00928     }

```

```

00929     }
00930     else { // One term with powers of coupling constants
00931         WORD *t, *tstop;
00932         t = coupl + ARGHEAD+3;
00933         tstop = coupl+*coupl; tstop -= ABS(tstop[-1]);
00934         while ( t < tstop ) {
00935             for ( i = 0; i < m->ncouplings; i++ ) {
00936                 if ( m->couplings[i] == *t ) {
00937                     cpl[i] = t[1];
00938                     break;
00939                 }
00940             }
00941             t += 2;
00942         }
00943     }
00944     /*
00945     And now the generation:
00946     */
00947     proc = new Process(pid, model, opt, ninitl, initlPart, nfinal, finalPart, cpl);
00948     opt->end();
00949     delete proc;
00950     delete opt;
00951     return(0);
00952 }
00953
00954 // #] GenDiagrams :
00955 // #[ processVertex :
00956
00957 // Routine is to be used recursively to work its way through a list
00958 // of possible vertices. The array of vertices is in TopoInf->vert
00959 // with TopoInf->nvert the number of possible vertices.
00960 // Currently we allow in TopoInf->vert only vertices with 3 or more edges.
00961 //
00962 // We work with a point system. Each n-point vertex contributes n-2 points.
00963 // When all points are assigned, we can call mgraph->generate().
00964 //
00965 // The number of vertices of a given number of edges is stored in
00966 // TopoInf->clnum[...] but the loop that determines how many there are
00967 // may be limited by the corresponding element in TopoInf->vertmax[level]
00968
00969 int processVertex(TOPOTYPE *TopoInf, int pointsremaining, int level)
00970 {
00971     int i, j;
00972
00973     for ( i = pointsremaining, j = 0; i >= 0; i -= TopoInf->vert[level]-2, j++ ) {
00974         if ( TopoInf->vertmax && TopoInf->vertmax[level] >= 0
00975             && j > TopoInf->vertmax[level] ) break;
00976         if ( i == 0 ) { // We got one!
00977             TopoInf->cldeg[TopoInf->ncl] = TopoInf->vert[level];
00978             TopoInf->clnum[TopoInf->ncl] = j;
00979             TopoInf->clxt[TopoInf->ncl] = 0;
00980             TopoInf->ncl++;
00981
00982             MGraph *mgraph = new MGraph(1, TopoInf->ncl, TopoInf->cldeg,
00983                                         TopoInf->clnum, TopoInf->clxt,
00984                                         TopoInf->cmind, TopoInf->cmaxd, TopoInf->opt);
00985
00986             mgraph->generate();
00987
00988             delete mgraph;
00989
00990             TopoInf->ncl--;
00991
00992             break;
00993         }
00994         if ( level < TopoInf->nvert-1 ) {
00995             if ( j > 0 ) {
00996                 TopoInf->cldeg[TopoInf->ncl] = TopoInf->vert[level];
00997                 TopoInf->clnum[TopoInf->ncl] = j;
00998                 TopoInf->clxt[TopoInf->ncl] = 0;
00999                 TopoInf->ncl++;
01000             }
01001             if ( processVertex(TopoInf,i,level+1) < 0 ) return(-1);
01002             if ( j > 0 ) { TopoInf->ncl--; }
01003         }
01004     }
01005     return(0);
01006 }
01007
01008 // #] processVertex :
01009 // #[ GenTopologies :
01010
01011 #define TOPO_MAXVERT 10
01012
01013 int GenTopologies(PHEAD WORD *term, WORD level)
01014 {
01015     Options *opt = new Options;

```

```

01016     int nlegs, nloops, i, identical;
01017     TERMINFO info;
01018     WORD *t, *t1, *tstop;
01019     TOPOTYPE TopoInf;
01020     SETS s;
01021 //
01022     info.term = term;
01023     info.level = level;
01024     info.diaoffset = AR.funoffset;
01025     info.flags = 0;
01026
01027     t = term + info.diaoffset; // the function
01028     t1 = t + FUNHEAD; // its arguments
01029     tstop = t + t[1];
01030
01031     info.externalset = t1[7];
01032     info.internalset = t1[9];
01033
01034     s = &(Sets[t1[5]]);
01035     TopoInf.nvert = s->last - s->first;
01036     TopoInf.vert = &(SetElements[s->first]);
01037
01038     nloops = t1[1];
01039     nlegs = t1[3];
01040
01041     info.numextern = nlegs;
01042
01043     for ( i = 0; i <= MAXLEGS; i++ ) { TopoInf.cmind[i] = TopoInf.cmaxd[i] = 0; }
01044
01045     t1 += 10;
01046     if ( t1 < tstop && t1[0] == -SETSET ) {
01047         TopoInf.vertmax = &(SetElements[Sets[t1[1]].first]);
01048         t1 += 2;
01049     }
01050     else TopoInf.vertmax = NULL;
01051
01052     info.flags |= TOPOLOGIESONLY; // this is the topologies_ function after all.
01053     if ( t1 < tstop && t1[0] == -SNUMBER ) {
01054         if ( ( t1[1] & WITHOUTNODES ) == WITHOUTNODES ) info.flags |= WITHOUTNODES;
01055         if ( ( t1[1] & WITHEGES ) == WITHEGES ) info.flags |= WITHEGES;
01056         if ( ( t1[1] & WITHBLOCKS ) == WITHBLOCKS ) info.flags |= WITHBLOCKS;
01057         if ( ( t1[1] & WITHONEPISETS ) == WITHONEPISETS ) info.flags |= WITHONEPISETS;
01058         opt->values[GRCC_OPT_1PI] = ( t1[1] & ONEPARTI ) == ONEPARTI;
01059         opt->values[GRCC_OPT_NoTadpole] = ( t1[1] & NOTADPOLE ) == NOTADPOLE;
01060         opt->values[GRCC_OPT_NoTadpole] = ( t1[1] & NOSNAIL ) == NOSNAIL;
01061         opt->values[GRCC_OPT_No1PtBlock] = ( t1[1] & NOTADPOLE ) == NOTADPOLE;
01062         opt->values[GRCC_OPT_NoExtSelf] = ( t1[1] & NOEXTSELF ) == NOEXTSELF;
01063
01064         if ( ( t1[1] & WITHINSERTIONS ) == WITHINSERTIONS ) {
01065             opt->values[GRCC_OPT_No2PtL1PI] = True;
01066             opt->values[GRCC_OPT_NoAdj2PtV] = True;
01067             opt->values[GRCC_OPT_No2PtL1PI] = True;
01068         }
01069         opt->values[GRCC_OPT_SymmInitial] = ( t1[1] & WITHSYMMETRIZEI ) == WITHSYMMETRIZEI;
01070         opt->values[GRCC_OPT_SymmFinal] = ( t1[1] & WITHSYMMETRIZEF ) == WITHSYMMETRIZEF;
01071     }
01072
01073     info.numdia = 0;
01074     info.numtopo = 1;
01075
01076     opt->setOutAG(ProcessDiagram, &info);
01077     opt->setOutMG(ProcessTopology, &info);
01078 //
01079 // Now we should sum over all possible vertices and run MGraph for
01080 // each combination. This is done by recursion in the processVertex routine
01081 // First load up the relevant arrays.
01082 //
01083
01084 // First the external nodes.
01085
01086     if ( nlegs == -2 ) {
01087         nlegs = 2;
01088         identical = 1;
01089     }
01090     for ( i = 0; i < nlegs; i++ ) {
01091         TopoInf.cldeg[i] = 1; TopoInf.clnum[i] = 1; TopoInf.clext[i] = -1;
01092     }
01093     int points = 2*nloops-2+nlegs;
01094
01095     if ( identical == 1 ) { /* Only propagator topologies..... */
01096         nlegs = 1;
01097         TopoInf.clnum[0] = 2;
01098     }
01099     TopoInf.ncl = nlegs;
01100     TopoInf.opt = opt;
01101
01102     if ( points >= MAXPOINTS ) {

```

```


01103         MLOCK(ErrorMessageLock);
01104         MesPrint("GenTopologies: %d loops and %d legs considered excessive",nloops,nlegs);
01105         MUNLOCK(ErrorMessageLock);
01106         Terminate(-1);
01107     }
01108     if ( processVertex(&TopoInf,points,0) != 0 ) {
01109         MLOCK(ErrorMessageLock);
01110         MesPrint("Called from GenTopologies with %d loops and %d legs",nloops,nlegs);
01111         MUNLOCK(ErrorMessageLock);
01112         Terminate(-1);
01113     }
01114     delete opt;
01115     return(0);
01116 }
01117
01118 // #] GenTopologies :
01119

```

4.25 dict.c File Reference

```
#include "form3.h"
```

Include dependency graph for dict.c:

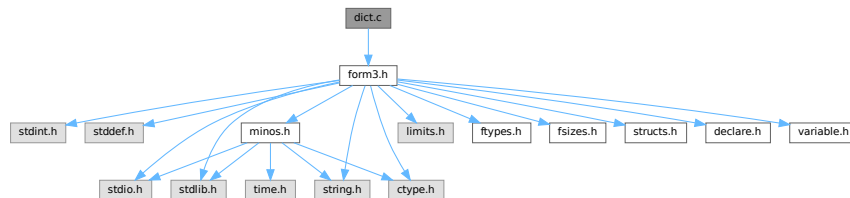

Functions

- void [TransformRational](#) (UWORD *a, WORD na)
- UBYTE * [IsMultiplySign](#) (void)
- UBYTE * [IsExponentSign](#) (void)
- UBYTE * [FindSymbol](#) (WORD num)
- UBYTE * [FindVector](#) (WORD num)
- UBYTE * [FindIndex](#) (WORD num)
- UBYTE * [FindFunction](#) (WORD num)
- UBYTE * [FindFunWithArgs](#) (WORD *t)
- UBYTE * [FindExtraSymbol](#) (WORD num)
- int [FindDictionary](#) (UBYTE *name)
- int [AddDictionary](#) (UBYTE *name)
- int [AddToDictionary](#) (DICTIONARY *dict, UBYTE *left, UBYTE *right)
- int [UseDictionary](#) (UBYTE *name, UBYTE *options)
- int [SetDictionaryOptions](#) (UBYTE *options)
- void [UnSetDictionary](#) (void)
- void [RemoveDictionary](#) (DICTIONARY *dict)
- void [ShrinkDictionary](#) (DICTIONARY *dict)
- int [DoPreOpenDictionary](#) (UBYTE *s)
- int [DoPreCloseDictionary](#) (UBYTE *s)
- int [DoPreUseDictionary](#) (UBYTE *s)
- int [DoPreAdd](#) (UBYTE *s)
- LONG [DictToBytes](#) (DICTIONARY *dict, UBYTE *buf)
- DICTIONARY * [DictFromBytes](#) (UBYTE *buf)

4.25.1 Detailed Description

Contains the code pertaining to dictionaries. Commands are: #opendictionary name #closedictionary #selectdictionary name <options>. There can be several dictionaries, but only one can be active. Defining elements is done with #add object: "replacement". Replacements are strings when a dictionary is for output translation. Objects can be 1: a number (rational) 2: a variable 3: * ^ 4: a function with arguments

Definition in file [dict.c](#).

4.25.2 Function Documentation

4.25.2.1 TransformRational()

```
void TransformRational (
    UWORD * a,
    WORD na )
```

Definition at line 71 of file [dict.c](#).

4.25.2.2 IsMultiplySign()

```
UBYTE * IsMultiplySign (
    void )
```

Definition at line 218 of file [dict.c](#).

4.25.2.3 IsExponentSign()

```
UBYTE * IsExponentSign (
    void )
```

Definition at line 238 of file [dict.c](#).

4.25.2.4 FindSymbol()

```
UBYTE * FindSymbol (
    WORD num )
```

Definition at line 258 of file [dict.c](#).

4.25.2.5 FindVector()

```
UBYTE * FindVector (
    WORD num )
```

Definition at line 279 of file [dict.c](#).

4.25.2.6 FindIndex()

```
UBYTE * FindIndex (
    WORD num )
```

Definition at line 301 of file [dict.c](#).

4.25.2.7 FindFunction()

```
UBYTE * FindFunction (
    WORD num )
```

Definition at line 323 of file [dict.c](#).

4.25.2.8 FindFunWithArgs()

```
UBYTE * FindFunWithArgs (
    WORD * t )
```

Definition at line 345 of file [dict.c](#).

4.25.2.9 FindExtraSymbol()

```
UBYTE * FindExtraSymbol (
    WORD num )
```

Definition at line 377 of file [dict.c](#).

4.25.2.10 FindDictionary()

```
int FindDictionary (
    UBYTE * name )
```

Definition at line 434 of file [dict.c](#).

4.25.2.11 AddDictionary()

```
int AddDictionary (
    UBYTE * name )
```

Definition at line 449 of file [dict.c](#).

4.25.2.12 AddToDictionary()

```
int AddToDictionary (
    DICTIONARY * dict,
    UBYTE * left,
    UBYTE * right )
```

Definition at line 491 of file [dict.c](#).

4.25.2.13 UseDictionary()

```
int UseDictionary (
    UBYTE * name,
    UBYTE * options )
```

Definition at line 766 of file [dict.c](#).

4.25.2.14 SetDictionaryOptions()

```
int SetDictionaryOptions (
    UBYTE * options )
```

Definition at line 790 of file [dict.c](#).

4.25.2.15 UnSetDictionary()

```
void UnSetDictionary (
    void )
```

Definition at line 883 of file [dict.c](#).

4.25.2.16 RemoveDictionary()

```
void RemoveDictionary (
    DICTIONARY * dict )
```

Definition at line 902 of file [dict.c](#).

4.25.2.17 ShrinkDictionary()

```
void ShrinkDictionary (
    DICTIONARY * dict )
```

Definition at line 945 of file [dict.c](#).

4.25.2.18 DoPreOpenDictionary()

```
int DoPreOpenDictionary (
    UBYTE * s )
```

Definition at line 959 of file [dict.c](#).

4.25.2.19 DoPreCloseDictionary()

```
int DoPreCloseDictionary (
    UBYTE * s )
```

Definition at line 998 of file [dict.c](#).

4.25.2.20 DoPreUseDictionary()

```
int DoPreUseDictionary (
    UBYTE * s )
```

Definition at line 1022 of file [dict.c](#).

4.25.2.21 DoPreAdd()

```
int DoPreAdd (
    UBYTE * s )
```

Definition at line 1067 of file [dict.c](#).

4.25.2.22 DictToBytes()

```
LONG DictToBytes (
    DICTIONARY * dict,
    UBYTE * buf )
```

Definition at line 1119 of file [dict.c](#).

4.25.2.23 DictFromBytes()

```
DICTIONARY * DictFromBytes (
    UBYTE * buf )
```

Definition at line 1152 of file [dict.c](#).

4.26 dict.c

[Go to the documentation of this file.](#)

```
00001
00018 /* #[] License : */
00019 /*
00020  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00021  * When using this file you are requested to refer to the publication
00022  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00023  * This is considered a matter of courtesy as the development was paid
00024  * for by FOM the Dutch physics granting agency and we would like to
00025  * be able to track its scientific use to convince FOM of its value
00026  * for the community.
00027  *
00028  * This file is part of FORM.
00029  *
00030  * FORM is free software: you can redistribute it and/or modify it under the
00031  * terms of the GNU General Public License as published by the Free Software
00032  * Foundation, either version 3 of the License, or (at your option) any later
00033  * version.
00034  *
00035  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00036  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00037  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00038  * details.
00039  *
00040  * You should have received a copy of the GNU General Public License along
00041  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00042  */
00043 /* #[] License : */
```

```

00044  /*
00045     #[ Includes : ratio.c
00046
00047     Data setup:
00048         AO.Dictionaries          Array of pointers to DICTIONARY
00049         AO.NumDictionaries
00050         AO.SizeDictionaries
00051         AO.CurrentDictionary
00052         AO.CurDictNumbers
00053         AO.CurDictVariables
00054         AO.CurDictSpecials
00055         AP.OpenDictionary
00056  */
00057
00058  #include "form3.h"
00059
00060  /*
00061     #] Includes :
00062     #[ TransformRational:
00063
00064     Tries to transform the rational number a according to the rules of
00065     the current dictionary. Whatever cannot be translated goes to the
00066     regular output.
00067     Options for AO.CurDictNumbers are:
00068         DICT_ALLNUMBERS, DICT_RATIONALONLY, DICT_INTEGERONLY, DICT_NONNUMBERS
00069  */
00070
00071  void TransformRational(UWORD *a, WORD na)
00072  {
00073      DICTIONARY *dict;
00074      WORD i, j, nb, i1, i2; UWORD *b;
00075      if ( AO.CurrentDictionary <= 0 ) goto NoAction;
00076      dict = AO.Dictionaries[AO.CurrentDictionary-1];
00077      if ( na < 0 ) na = -na;
00078      switch ( AO.CurDictNumbers ) {
00079          case DICT_NONNUMBERS:
00080              goto NoAction;
00081          case DICT_INTEGERONLY:
00082              if ( a[na] != 1 ) goto NoAction;
00083              if ( na > 1 ) {
00084                  for ( i = 1; i < na; i++ ) {
00085                      if ( a[na+i] != 0 ) goto NoAction;
00086                  }
00087              }
00088              Numeratoronly;;
00089              for ( i = dict->numelements-1; i >= 0; i-- ) {
00090                  if ( dict->elements[i]->type == DICT_INTEGERNUMBER ) {
00091                      if ( dict->elements[i]->size == na ) {
00092                          for ( j = 0; j < na; j++ ) {
00093                              if ( (UWORD)(dict->elements[i]->lhs[j]) != a[j] ) break;
00094                          }
00095                          if ( j == na ) { /* Got it */
00096                              TokenToLine((UBYTE *) (dict->elements[i]->rhs));
00097                              return;
00098                          }
00099                      }
00100                  }
00101              }
00102              goto NotFound;
00103          case DICT_RATIONALONLY:
00104              nb = 2*na;
00105              for ( i = dict->numelements-1; i >= 0; i-- ) {
00106                  if ( dict->elements[i]->type == DICT_RATIONALNUMBER ) {
00107                      if ( dict->elements[i]->size == nb+2 ) {
00108                          for ( j = 0; j < nb; j++ ) {
00109                              if ( (UWORD)(dict->elements[i]->lhs[j+1]) != a[j] ) break;
00110                          }
00111                          if ( j == nb ) { /* Got it */
00112                              TokenToLine((UBYTE *) (dict->elements[i]->rhs));
00113                              return;
00114                          }
00115                      }
00116                  }
00117              }
00118              goto NotFound;
00119          case DICT_ALLNUMBERS:
00120              /*
00121               First fish for rationals
00122              */
00123              nb = 2*na;
00124              for ( i = dict->numelements-1; i >= 0; i-- ) {
00125                  if ( dict->elements[i]->type == DICT_RATIONALNUMBER ) {
00126                      if ( dict->elements[i]->size == nb+2 ) {
00127                          for ( j = 0; j < nb; j++ ) {
00128                              if ( (UWORD)(dict->elements[i]->lhs[j+1]) != a[j] ) break;
00129                          }
00130                          if ( j == nb ) { /* Got it */

```

```

00131             TokenToLine((UBYTE *) (dict->elements[i]->rhs));
00132             return;
00133         }
00134     }
00135 }
00136 }
00137 /*
00138     Now look for element[j1]/element[j2]
00139 */
00140 nb = na; b = a+na;
00141 while ( b[nb-1] == 0 ) nb--;
00142 if ( nb == 1 && b[0] == 1 ) goto Numeratoronly;
00143 while ( a[na-1] == 0 ) na--;
00144 for ( i1 = dict->numelements-1; i1 >= 0; i1-- ) {
00145     if ( dict->elements[i1]->type == DICT_INTEGERNUMBER ) {
00146         if ( dict->elements[i1]->size == na ) {
00147             for ( j = 0; j < na; j++ ) {
00148                 if ( (UWORD) (dict->elements[i1]->lhs[j]) != a[j] ) break;
00149             }
00150             if ( j == na ) break;
00151         }
00152     }
00153 }
00154 for ( i2 = dict->numelements-1; i2 >= 0; i2-- ) {
00155     if ( dict->elements[i2]->type == DICT_INTEGERNUMBER ) {
00156         if ( dict->elements[i2]->size == nb ) {
00157             for ( j = 0; j < nb; j++ ) {
00158                 if ( (UWORD) (dict->elements[i2]->lhs[j]) != b[j] ) break;
00159             }
00160             if ( j == nb ) break;
00161         }
00162     }
00163 }
00164 if ( i1 < 0 ) {
00165     if ( i2 < 0 ) goto NotFound;
00166     else { /* number/replacement[i2] */
00167         LongToLine(a,na);
00168         if ( na > 1 || ( AO.DoubleFlag & 4 ) == 4 ) {
00169             if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
00170                 || AC.OutputMode == CMODE ) {
00171                 if ( ( AO.DoubleFlag & 2 ) == 2 ) { AddToLine((UBYTE *) ".Q0/"); }
00172                 else if ( ( AO.DoubleFlag & 1 ) == 1 ) { AddToLine((UBYTE *) ".D0/"); }
00173                 else { AddToLine((UBYTE *) "/"); }
00174             }
00175         }
00176         else AddToLine((UBYTE *) ("/"));
00177         TokenToLine((UBYTE *) (dict->elements[i2]->rhs));
00178     }
00179 }
00180 else if ( i2 < 0 ) { /* replacement[i1]/number */
00181     TokenToLine((UBYTE *) (dict->elements[i1]->rhs));
00182     AddToLine((UBYTE *) ("/"));
00183     LongToLine((UWORD *) (b),nb);
00184     if ( nb > 1 || ( AO.DoubleFlag & 4 ) == 4 ) {
00185         if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
00186             || AC.OutputMode == CMODE ) {
00187             if ( ( AO.DoubleFlag & 2 ) == 2 ) { AddToLine((UBYTE *) ".Q0"); }
00188             else if ( ( AO.DoubleFlag & 1 ) == 1 ) { AddToLine((UBYTE *) ".D0"); }
00189         }
00190     }
00191 }
00192 else { /* replacement[i1]/replacement[i2] */
00193     TokenToLine((UBYTE *) (dict->elements[i1]->rhs));
00194     AddToLine((UBYTE *) ("/"));
00195     TokenToLine((UBYTE *) (dict->elements[i2]->rhs));
00196 }
00197 break;
00198 default:
00199     MesPrint("Illegal code in TransformRational: %d",AO.CurDictNumbers);
00200     Terminate(-1);
00201 }
00202 return;
00203 NotFound:
00204 if ( na != 1 || a[1] != 1 ) {
00205     if ( AO.CurDictNumberWarning ) {
00206         MesPrint("»»»»»Could not translate coefficient with dictionary %s«««««",dict->name);
00207     }
00208 NoAction:
00209     RatToLine(a,na);
00210     return;
00211 }
00212
00213 /*
00214     #] TransformRational:
00215     #[ IsMultiplySign:
00216 */
00217

```

```

00218 UBYTE *IsMultiplySign(void)
00219 {
00220     DICTIONARY *dict;
00221     int i;
00222     if ( AO.CurrentDictionary <= 0 ) return(0);
00223     dict = AO.Dictionaries[AO.CurrentDictionary-1];
00224     if ( dict->characters == 0 ) return(0);
00225     for ( i = dict->numelements-1; i >= 0; i-- ) {
00226         if ( ( dict->elements[i]->type == DICT_SPECIALCHARACTER )
00227             && ( dict->elements[i]->lhs[0] == (WORD)('*') ) )
00228             return((UBYTE *) (dict->elements[i]->rhs));
00229     }
00230     return(0);
00231 }
00232
00233 /*
00234 #] IsMultiplySign:
00235 #[ IsExponentSign:
00236 */
00237
00238 UBYTE *IsExponentSign(void)
00239 {
00240     DICTIONARY *dict;
00241     int i;
00242     if ( AO.CurrentDictionary <= 0 ) return(0);
00243     dict = AO.Dictionaries[AO.CurrentDictionary-1];
00244     if ( dict->characters == 0 ) return(0);
00245     for ( i = dict->numelements-1; i >= 0; i-- ) {
00246         if ( ( dict->elements[i]->type == DICT_SPECIALCHARACTER )
00247             && ( dict->elements[i]->lhs[0] == (WORD)('^') ) )
00248             return((UBYTE *) (dict->elements[i]->rhs));
00249     }
00250     return(0);
00251 }
00252
00253 /*
00254 #] IsExponentSign:
00255 #[ FindSymbol :
00256 */
00257
00258 UBYTE *FindSymbol(WORD num)
00259 {
00260     if ( AO.CurrentDictionary > 0 ) {
00261         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];
00262         int i;
00263         if ( dict->variables > 0 && AO.CurDictVariables == DICT_DOVARIABLES ) {
00264             for ( i = dict->numelements-1; i >= 0; i-- ) {
00265                 if ( dict->elements[i]->type == DICT_SYMBOL &&
00266                     dict->elements[i]->lhs[0] == num )
00267                     return((UBYTE *) (dict->elements[i]->rhs));
00268             }
00269         }
00270     }
00271     return(VARNAME(symbols,num));
00272 }
00273
00274 /*
00275 #] FindSymbol :
00276 #[ FindVector :
00277 */
00278
00279 UBYTE *FindVector(WORD num)
00280 {
00281     if ( AO.CurrentDictionary > 0 ) {
00282         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];
00283         int i;
00284         if ( dict->variables > 0 && AO.CurDictVariables == DICT_DOVARIABLES ) {
00285             for ( i = dict->numelements-1; i >= 0; i-- ) {
00286                 if ( dict->elements[i]->type == DICT_VECTOR &&
00287                     dict->elements[i]->lhs[0] == num )
00288                     return((UBYTE *) (dict->elements[i]->rhs));
00289             }
00290         }
00291     }
00292     num -= AM.OffsetVector;
00293     return(VARNAME(vectors,num));
00294 }
00295
00296 /*
00297 #] FindVector :
00298 #[ FindIndex :
00299 */
00300
00301 UBYTE *FindIndex(WORD num)
00302 {
00303     if ( AO.CurrentDictionary > 0 ) {
00304         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];

```

```

00305     int i;
00306     if ( dict->variables > 0 && AO.CurDictVariables == DICT_DOVARIABLES ) {
00307         for ( i = dict->numelements-1; i >= 0; i-- ) {
00308             if ( dict->elements[i]->type == DICT_INDEX &&
00309                 dict->elements[i]->lhs[0] == num )
00310                 return((UBYTE *) (dict->elements[i]->rhs));
00311         }
00312     }
00313 }
00314 num -= AM.OffsetIndex;
00315 return(VARNAME(indices,num));
00316 }
00317
00318 /*
00319 #] FindIndex :
00320 #[ FindFunction :
00321 */
00322
00323 UBYTE *FindFunction(WORD num)
00324 {
00325     if ( AO.CurrentDictionary > 0 ) {
00326         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];
00327         int i;
00328         if ( dict->variables > 0 && AO.CurDictVariables == DICT_DOVARIABLES ) {
00329             for ( i = dict->numelements-1; i >= 0; i-- ) {
00330                 if ( dict->elements[i]->type == DICT_FUNCTION &&
00331                     dict->elements[i]->lhs[0] == num )
00332                     return((UBYTE *) (dict->elements[i]->rhs));
00333             }
00334         }
00335     }
00336     num -= FUNCTION;
00337     return(VARNAME(functions,num));
00338 }
00339
00340 /*
00341 #] FindFunction :
00342 #[ FindFunWithArgs :
00343 */
00344
00345 UBYTE *FindFunWithArgs(WORD *t)
00346 {
00347     if ( AO.CurrentDictionary > 0 ) {
00348         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];
00349         int i, j;
00350         if ( dict->funwith > 0
00351             && AO.CurDictFunWithArgs == DICT_DOFUNWITHARGS ) {
00352             for ( i = dict->numelements-1; i >= 0; i-- ) {
00353                 if ( dict->elements[i]->type == DICT_FUNCTION_WITH_ARGUMENTS &&
00354                     (WORD)(dict->elements[i]->lhs[0]) == t[0] &&
00355                     (WORD)(dict->elements[i]->lhs[1]) == t[1] ) {
00356                     for ( j = 2; j < t[1]; j++ ) {
00357                         if ( (WORD)(dict->elements[i]->lhs[j]) != t[j] ) break;
00358                     }
00359                     if ( j >= t[1] ) return((UBYTE *) (dict->elements[i]->rhs));
00360                 }
00361             }
00362         }
00363     }
00364     return(0);
00365 }
00366
00367 /*
00368 #] FindFunWithArgs :
00369 #[ FindExtraSymbol :
00370
00371 The extra symbol is constructed in the WorkSpace. This way we do not
00372 have to worry about Malloc and freeing the object later.
00373 The input value num is already the number of the extra symbol.
00374 We do NOT need num = MAXVARIABLES-num;
00375 */
00376
00377 UBYTE *FindExtraSymbol(WORD num)
00378 {
00379     GETIDENTITY;
00380     UBYTE *out = (UBYTE *) (AT.WorkPointer);
00381     *out = 0;
00382     if ( AO.CurrentDictionary > 0 ) {
00383         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];
00384         int i;
00385         if ( dict->ranges > 0 && AO.CurDictVariables == DICT_DOVARIABLES ) {
00386             for ( i = dict->numelements-1; i >= 0; i-- ) {
00387                 if ( dict->elements[i]->type == DICT_RANGE
00388                     && num >= dict->elements[i]->lhs[0]
00389                     && num <= dict->elements[i]->lhs[1] ) {
00390
00391                     Now we have to translate the rhs

```

```

00392             %# gives the number
00393             %@ gives the number as its position in the range
00394         */
00395         UBYTE *r = (UBYTE *) (dict->elements[i]->rhs);
00396         while ( *r ) {
00397             if ( *r == (UBYTE) '%' && ( r[1] == (UBYTE) '#'
00398             || r[1] == (UBYTE) '@' ) ) {
00399                 if ( r[1] == (UBYTE) '#' ) {
00400                     out = NumCopy(num,out);
00401                 }
00402                 else {
00403                     out = NumCopy(num-dict->elements[i]->lhs[0]+1,out);
00404                 }
00405                 r += 2;
00406             }
00407             else {
00408                 *out++ = *r++;
00409             }
00410         }
00411         *out = 0;
00412         return((UBYTE *) (AT.WorkPointer));
00413     }
00414 }
00415 }
00416 }
00417
00418 out = StrCopy((UBYTE *)AC.extrasym,out);
00419 if ( AC.extrasymbols == 0 ) {
00420     out = NumCopy(num,out);
00421     out = StrCopy((UBYTE *) "_",out);
00422 }
00423 else if ( AC.extrasymbols == 1 ) {
00424     out = AddArrayIndex(num,out);
00425 }
00426 return((UBYTE *) (AT.WorkPointer));
00427 }
00428
00429 /*
00430 #] FindExtraSymbol :
00431 #[ FindDictionary :
00432 */
00433
00434 int FindDictionary(UBYTE *name)
00435 {
00436     int i;
00437     for ( i = 0; i < AO.NumDictionaries; i++ ) {
00438         if ( StrCmp(AO.Dictionaries[i]->name,name) == 0 )
00439             return(i+1);
00440     }
00441     return(0);
00442 }
00443
00444 /*
00445 #] FindDictionary :
00446 #[ AddDictionary :
00447 */
00448
00449 int AddDictionary(UBYTE *name)
00450 {
00451     DICTIONARY *dict;
00452     /*
00453     First make space for the pointer in the list.
00454     */
00455     if ( AO.NumDictionaries >= AO.SizeDictionaries-1 ) {
00456         DICTIONARY **d;
00457         int i;
00458         if ( AO.SizeDictionaries <= 0 ) AO.SizeDictionaries = 10;
00459         else AO.SizeDictionaries = 2*AO.SizeDictionaries;
00460         d = (DICTIONARY **)Malloc1(AO.SizeDictionaries*sizeof(DICTIONARY *),"Dictionaries");
00461         for ( i = 0; i < AO.NumDictionaries; i++ ) d[i] = AO.Dictionaries[i];
00462         if ( AO.Dictionaries != 0 ) M_free(AO.Dictionaries,"Dictionaries");
00463         AO.Dictionaries = d;
00464     }
00465     /*
00466     Now create an empty dictionary.
00467     */
00468     dict = (DICTIONARY *)Malloc1(sizeof(DICTIONARY),"Dictionary");
00469     AO.Dictionaries[AO.NumDictionaries++] = dict;
00470     dict->elements = 0;
00471     dict->name = strDup1(name,"DictionaryName");
00472     dict->sizeelements = 0;
00473     dict->numelements = 0;
00474     dict->numbers = 0;
00475     dict->variables = 0;
00476     dict->characters = 0;
00477     dict->funwith = 0;
00478     dict->gnumelements = 0;

```



```

00479     dict->ranges = 0;
00480
00481     return(AO.NumDictionaries);
00482 }
00483
00484 /*
00485  #] AddDictionary :
00486  #[ AddToDictionary :
00487
00488      To be called from #add left:right
00489 */
00490
00491 int AddToDictionary(DICTIONARY *dict, UBYTE *left, UBYTE *right)
00492 {
00493     GETIDENTITY
00494     CBUF *C = cbuf+AC.cbufnum;
00495     WORD *w = AT.WorkPointer;
00496     WORD *OldWork = AT.WorkPointer;
00497     WORD *s, oldnumrhs = C->numrhs, oldnumlhs = C->numlhs;
00498     WORD *ow, *ww, *mm, oldEside, *where = 0, type, number, range[3];
00499     LONG oldcpointer;
00500     int error = 0, sizelhs, sizerhs, i, retcode;
00501     UBYTE *r;
00502     DICTIONARY_ELEMENT *new;
00503     WORD power = (WORD)('^'), times = (WORD)('*');
00504     if ( ( left[0] == '^' && left[1] == 0 )
00505         || ( left[0] == '*' && left[1] == '*' && left[2] == 0 ) ) {
00506         type = DICT_SPECIALCHARACTER;
00507         number = 1;
00508         where = &power;
00509         goto TestDouble;
00510     }
00511     else if ( left[0] == '*' && left[1] == 0 ) {
00512         type = DICT_SPECIALCHARACTER;
00513         number = 1;
00514         where = &times;
00515         goto TestDouble;
00516     }
00517     else if ( left[0] == '(' ) { /* range of extra symbols */
00518         WORD x1 = 0, x2 = 0;
00519         r = left+1;
00520         while ( FG.cTable[*r] == 1 ) x1 = 10*x1 + *r++ - '0';
00521         if ( *r == ',' ) {
00522             r++;
00523             while ( FG.cTable[*r] == 1 ) x2 = 10*x2 + *r++ - '0';
00524         }
00525         else x2 = x1;
00526         number = 2;
00527         if ( *r != ')' ) {
00528             MesPrint("&Illegal range specification in LHS of %#add instruction.");
00529             return(1);
00530         }
00531         type = DICT_RANGE;
00532         if ( x1 <= 0 || x2 <= 0 || x1 > x2 ) {
00533             MesPrint("&Illegal range in LHS of %#add instruction.");
00534             return(1);
00535         }
00536         range[0] = x1;
00537         range[1] = x2;
00538         range[2] = 0;
00539         where = range;
00540         goto TestDouble;
00541     }
00542 /*
00543     Translate the left part. Determine type.
00544     We follow the code in CoIdExpression and then veto what we do not like.
00545     Just make sure to pop what needs to be popped in the compiler buffer.
00546 */
00547     AC.ProtoType = w;
00548     *w++ = SUBEXPRESSION;
00549     *w++ = SUBEXPSIZE;
00550     *w++ = C->numrhs+1;
00551     *w++ = 1;
00552     *w++ = AC.cbufnum;
00553     FILLSUB(w)
00554     AC.WildC = w;
00555     AC.NwildC = 0;
00556     AT.WorkPointer = s = w + 4*AM.MaxWildcards + 8;
00557 /*
00558     Now read the LHS
00559 */
00560     oldcpointer = AddLHS(AC.cbufnum) - C->Buffer;
00561
00562     if ( ( retcode = CompileAlgebra(left, LHSIDE, AC.ProtoType) ) < 0 ) { error = 1; }
00563     else AC.ProtoType[2] = retcode;
00564     AT.WorkPointer = s;
00565     if ( AC.NwildC && SortWild(w, AC.NwildC) ) error = 1;

```

```

00566
00567     OldWork[1] = AC.WildC-OldWork;
00568     w = AC.WildC;
00569     AT.WorkPointer = w;
00570     s = C->rhs[C->numrhs];
00571  /*
00572     We have the expression in the compiler buffers.
00573     The main level is at lhs[numlhs]
00574     The partial lhs (including ProtoType) is in OldWork (in Workspace)
00575     We need to load the result at w after the prototype
00576     Because these sort routines don't use the Workspace
00577     there should not be a conflict
00578  */
00579     if ( !error && *s == 0 ) {
00580 IllLeft:MesPrint("&Illegal LHS in dictionary");
00581         AC.lhdollarflag = 0;
00582         return(1);
00583     }
00584     if ( !error && *(s+s) != 0 ) {
00585         MesPrint("&LHS in dictionary should be one term only");
00586         return(1);
00587     }
00588     if ( error == 0 ) {
00589         if ( NewSort(BHEAD0) || NewSort(BHEAD0) ) {
00590             if ( !error ) error = 1;
00591             return(error);
00592         }
00593         AN.RepPoint = AT.RepCount + 1;
00594         ow = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer;
00595         mm = s; ww = ow; i = *mm;
00596         while ( --i >= 0 ) { *ww++ = *mm++; } AT.WorkPointer = ww;
00597         AC.lhdollarflag = 0; oldEside = AR.Eside; AR.Eside = LHSIDE;
00598         AR.Cnumlhs = C->numlhs;
00599         if ( Generator(BHEAD ow,C->numlhs) ) {
00600             AR.Eside = oldEside;
00601             LowerSortLevel(); goto IllLeft;
00602         }
00603         AR.Eside = oldEside;
00604         AT.WorkPointer = w;
00605         if ( EndSort(BHEAD w,0) < 0 ) { LowerSortLevel(); goto IllLeft; }
00606         if ( *w == 0 || *(w+w) != 0 ) {
00607             MesPrint("&LHS must be one term");
00608             AC.lhdollarflag = 0;
00609             return(1);
00610         }
00611         LowerSortLevel();
00612     }
00613     AT.WorkPointer = w + *w;
00614     AC.DumNum = 0;
00615  /*
00616     Everything is now after OldWork. We can pop the compilerbuffer.
00617     Next test for illegal things like a coefficient
00618     At this point we have:
00619     w = the term of the LHS
00620  */
00621     C->Pointer = C->Buffer + oldcpointer;
00622     C->numrhs = oldnumrhs;
00623     C->numlhs = oldnumlhs;
00624     AC.lhdollarflag = 0;
00625  /*
00626     Test for undesirables.
00627         1: wildcards
00628         2: sign
00629         3: more than one term
00630         4: composite terms
00631  */
00632     if ( AC.ProtoType[1] != SUBEXPSIZE ) {
00633         MesPrint("& Currently no wildcards allowed in dictionaries.");
00634         return(1);
00635     }
00636     if ( w[w[0]-1] < 0 ) {
00637         MesPrint("& Currently no sign allowed in dictionaries.");
00638         return(1);
00639     }
00640     if ( w[w[0]] != 0 ) {
00641         MesPrint("& More than one term in dictionary element.");
00642         return(1);
00643     }
00644     if ( w[0] == w[w[0]-1]+1 ) { /* Only coefficient */
00645         WORD *numer, *denom;
00646         WORD nsize, dsize;
00647         nsize = dsize = (w[w[0]-1]-1)/2;
00648         numer = w+1;
00649         denom = numer+nsize;
00650         while ( numer[nsize-1] == 0 ) nsize--;
00651         while ( denom[dsize-1] == 0 ) dsize--;
00652         if ( dsize == 1 && denom[0] == 1 ) {

```

```

00653         type = DICT_INTEGERNUMBER;
00654         number = nsize;
00655         where = number;
00656     }
00657     else {
00658         type = DICT_RATIONALNUMBER;
00659         number = w[0];
00660         where = w;
00661     }
00662 }
00663 else {
00664     s = w + w[0]-1;
00665     if ( s[0] != 3 || s[-1] != 1 || s[-2] != 1 ) {
00666 Compositeness:;
00667         MesPrint("& Currently no composite objects allowed in dictionaries.");
00668         return(1);
00669     }
00670     if ( w[0] != w[2]+4 ) goto Compositeness;
00671     s = w+1;
00672     switch ( *s ) {
00673     case SYMBOL:
00674         if ( s[1] != 4 || s[3] != 1 ) goto Compositeness;
00675         type = DICT_SYMBOL;
00676         number = 1;
00677         where = s+2;
00678         break;
00679     case INDEX:
00680         if ( s[1] != 3 ) goto Compositeness;
00681         if ( s[2] < 0 ) type = DICT_VECTOR;
00682         else type = DICT_INDEX;
00683         number = 1;
00684         where = s+2;
00685         break;
00686     default:
00687         if ( *s < FUNCTION ) {
00688             MesPrint("& Illegal object in dictionary.");
00689             return(1);
00690         }
00691         if ( s[1] == FUNHEAD ) {
00692             type = DICT_FUNCTION;
00693             number = 1;
00694             where = s;
00695             break;
00696         }
00697         else {
00698             type = DICT_FUNCTION_WITH_ARGUMENTS;
00699             number = s[1];
00700             where = s;
00701         }
00702         break;
00703     }
00704 }
00705 TestDouble:;
00706 /*
00707  Create a new element
00708 */
00709 if ( dict->numelements >= dict->sizeelements ) {
00710     DICTIONARY_ELEMENT **d;
00711     if ( dict->sizeelements <= 0 ) dict->sizeelements = 10;
00712     else dict->sizeelements *= 2;
00713     d = (DICTIONARY_ELEMENT **)Malloc1(
00714         sizeof(DICTIONARY_ELEMENT *)*dict->sizeelements,"Dictionary elements");
00715     for ( i = 0; i < dict->numelements; i++ )
00716         d[i] = dict->elements[i];
00717     if ( dict->elements ) M_free(dict->elements,"Dictionary elements");
00718     dict->elements = d;
00719 }
00720 sizelhs = number+1;
00721 sizerhs = 1; r = right; while ( *r++ ) sizerhs++;
00722 sizerhs = (sizerhs+sizeof(WORD)-1)/sizeof(WORD)+1;
00723 new = (DICTIONARY_ELEMENT *)Malloc1(sizeof(DICTIONARY_ELEMENT)
00724     +sizeof(WORD)*(sizelhs+sizerhs),"Dictionary element");
00725 new->lhs = (WORD *) (new+1);
00726 new->rhs = new->lhs+sizelhs;
00727 new->type = type;
00728 new->size = number;
00729 for ( i = 0; i < number; i++ ) new->lhs[i] = where[i];
00730 new->lhs[i] = 0;
00731 r = (UBYTE *) (new->rhs);
00732 while ( *right ) {
00733     if ( *right == '\\ ' && ( right[1] == ' ' || right[1] == '\\ " ) ) right++;
00734     *r++ = *right++;
00735 }
00736 *r = 0;
00737
00738 dict->elements[dict->numelements++] = new;
00739

```

```

00740     switch ( type ) {
00741         case DICT_INTEGERNUMBER:
00742         case DICT_RATIONALNUMBER:
00743             dict->numbers++; break;
00744         case DICT_SYMBOL:
00745         case DICT_VECTOR:
00746         case DICT_INDEX:
00747         case DICT_FUNCTION:
00748             dict->variables++; break;
00749         case DICT_FUNCTION_WITH_ARGUMENTS:
00750             dict->funwith++; break;
00751         case DICT_SPECIALCHARACTER:
00752             dict->characters++; break;
00753         case DICT_RANGE:
00754             dict->ranges++; break;
00755     }
00756
00757     AT.WorkPointer = OldWork;
00758     return(0);
00759 }
00760
00761 /*
00762  #] AddToDictionary :
00763  #[ UseDictionary :
00764  */
00765
00766 int UseDictionary(UBYTE *name,UBYTE *options)
00767 {
00768     int i;
00769     for ( i = 0; i < AO.NumDictionaries; i++ ) {
00770         if ( StrCmp(AO.Dictionaries[i]->name,name) == 0 ) {
00771             AO.CurrentDictionary = i+1;
00772             if ( SetDictionaryOptions(options) < 0 ) {
00773                 AO.CurrentDictionary = 0;
00774                 return(-1);
00775             }
00776             else { /* Now test whether what is requested is really there? */
00777                 return(0);
00778             }
00779         }
00780     }
00781     MesPrint("@There is no dictionary with the name %s",name);
00782     exit(-1);
00783 }
00784
00785 /*
00786  #] UseDictionary :
00787  #[ SetDictionaryOptions :
00788  */
00789
00790 int SetDictionaryOptions(UBYTE *options)
00791 {
00792     UBYTE *opt, *s, c;
00793     int retval = 0;
00794     s = options;
00795     AO.CurDictNumbers = DICT_ALLNUMBERS;
00796     AO.CurDictVariables = DICT_DOVARIABLES;
00797     AO.CurDictSpecials = DICT_DOSPECIALS;
00798     AO.CurDictFunWithArgs = DICT_DOFUNWITHARGS;
00799     AO.CurDictNumberWarning = 0;
00800     AO.CurDictNotInFunctions= 0;
00801     AO.CurDictInDollars = DICT_NOTINDOLLARS;
00802     while ( *s ) {
00803         opt = s;
00804         while ( *s && *s != ',' ) s++;
00805         c = *s; *s = 0;
00806         if ( opt[0] == '$' && opt[1] == 0 ) {
00807             AO.CurDictInDollars = DICT_INDOLLARS;
00808         }
00809         else if ( StrICmp(opt,(UBYTE *)"nonumbers") == 0 ) {
00810             AO.CurDictNumbers = DICT_NONUMBERS;
00811         }
00812         else if ( StrICmp(opt,(UBYTE *)"integersonly") == 0 ) {
00813             AO.CurDictNumbers = DICT_INTEGERONLY;
00814         }
00815         else if ( StrICmp(opt,(UBYTE *)"rationalsoonly") == 0 ) {
00816             AO.CurDictNumbers = DICT_RATIONALONLY;
00817         }
00818         else if ( StrICmp(opt,(UBYTE *)"allnumbers") == 0 ) {
00819             AO.CurDictNumbers = DICT_ALLNUMBERS;
00820         }
00821         else if ( StrICmp(opt,(UBYTE *)"novariables") == 0 ) {
00822             AO.CurDictVariables = DICT_NOVARIABLES;
00823         }
00824         else if ( StrICmp(opt,(UBYTE *)"numbersonly") == 0 ) {
00825             AO.CurDictNumbers = DICT_ALLNUMBERS;
00826             AO.CurDictVariables = DICT_NOVARIABLES;

```

```

00827         AO.CurDictSpecials = DICT_NOSPECIALS;
00828         AO.CurDictFunWithArgs = DICT_NOFUNWITHARGS;
00829     }
00830     else if ( StrICmp(opt, (UBYTE *)"variablesonly") == 0 ) {
00831         AO.CurDictNumbers = DICT_NONUMBERS;
00832         AO.CurDictVariables = DICT_DOVARIABLES;
00833         AO.CurDictSpecials = DICT_NOSPECIALS;
00834         AO.CurDictFunWithArgs = DICT_NOFUNWITHARGS;
00835     }
00836     else if ( StrICmp(opt, (UBYTE *)"nospecials") == 0 ) {
00837         AO.CurDictSpecials = DICT_NOSPECIALS;
00838     }
00839     else if ( StrICmp(opt, (UBYTE *)"specialsonly") == 0 ) {
00840         AO.CurDictNumbers = DICT_NONUMBERS;
00841         AO.CurDictVariables = DICT_NOVARIABLES;
00842         AO.CurDictSpecials = DICT_DOSPECIALS;
00843         AO.CurDictFunWithArgs = DICT_NOFUNWITHARGS;
00844     }
00845     else if ( StrICmp(opt, (UBYTE *)"nofunwithargs") == 0 ) {
00846         AO.CurDictFunWithArgs = DICT_NOFUNWITHARGS;
00847     }
00848     else if ( StrICmp(opt, (UBYTE *)"funwithargsonly") == 0 ) {
00849         AO.CurDictNumbers = DICT_NONUMBERS;
00850         AO.CurDictVariables = DICT_NOVARIABLES;
00851         AO.CurDictSpecials = DICT_NOSPECIALS;
00852         AO.CurDictFunWithArgs = DICT_DOFUNWITHARGS;
00853     }
00854     else if ( StrICmp(opt, (UBYTE *)"warnings") == 0
00855              || StrICmp(opt, (UBYTE *)"warning") == 0 ) {
00856         AO.CurDictNumberWarning = 1;
00857     }
00858     else if ( StrICmp(opt, (UBYTE *)"nowarnings") == 0
00859              || StrICmp(opt, (UBYTE *)"nowarning") == 0 ) {
00860         AO.CurDictNumberWarning = 0;
00861     }
00862     else if ( StrICmp(opt, (UBYTE *)"infunctions") == 0 ) {
00863         AO.CurDictNotInFunctions= 0;
00864     }
00865     else if ( StrICmp(opt, (UBYTE *)"notinfunctions") == 0 ) {
00866         AO.CurDictNotInFunctions= 1;
00867     }
00868     else {
00869         MesPrint("@ Unrecognized option in %#SetDictionary: %s",opt);
00870         retval = -1;
00871     }
00872     *s = c;
00873     if ( c == ',' ) s++;
00874 }
00875 return(retval);
00876 }
00877
00878 /*
00879  #] SetDictionaryOptions :
00880  #[ UnSetDictionary :
00881  */
00882
00883 void UnSetDictionary(void)
00884 {
00885     AO.CurrentDictionary = 0;
00886     AO.CurDictNumbers = -1;
00887     AO.CurDictVariables = -1;
00888     AO.CurDictSpecials = -1;
00889     AO.CurDictFunWithArgs = -1;
00890     AO.CurDictFunWithArgs = -1;
00891     AO.CurDictNumberWarning = -1;
00892     AO.CurDictNotInFunctions= -1;
00893 }
00894
00895 /*
00896  #] UnSetDictionary :
00897  #[ RemoveDictionary :
00898
00899     Mostly needed for .clear
00900  */
00901
00902 void RemoveDictionary(DICTIONARY *dict)
00903 {
00904     int i;
00905     if ( dict == 0 ) return;
00906     for ( i = 0; i < AO.NumDictionaries; i++ ) {
00907         if ( AO.Dictionaries[i] == dict ) {
00908             for ( i++; i < AO.NumDictionaries; i++ ) {
00909                 AO.Dictionaries[i-1] = AO.Dictionaries[i];
00910             }
00911             AO.NumDictionaries--;
00912             goto removeit;
00913         }

```

```

00914     }
00915     MesPrint("@ Dictionary not found in RemoveDictionary");
00916     exit(-1);
00917 removeit:;
00918     for ( i = 0; i < dict->numelements; i++ )
00919         M_free(dict->elements[i], "Dictionary element");
00920     for ( i = 0; i < dict->numelements; i++ ) dict->elements[i] = 0;
00921     if ( dict->elements ) M_free(dict->elements, "Dictionary elements");
00922     if ( dict->name ) {
00923         M_free(dict->name, "DictionaryName");
00924         dict->name = 0;
00925     }
00926     dict->sizeelements = 0;
00927     dict->numelements = 0;
00928     dict->numbers = 0;
00929     dict->variables = 0;
00930     dict->characters = 0;
00931     dict->funwith = 0;
00932     dict->gnumelements = 0;
00933     dict->ranges = 0;
00934 }
00935
00936 /*
00937 #] RemoveDictionary :
00938 #[ ShrinkDictionary :
00939
00940     To be called after a .store to restore the dictionary to the state
00941     it had at the last .global
00942     We do not make the elements array shorter.
00943 */
00944
00945 void ShrinkDictionary(DICTIONARY *dict)
00946 {
00947     while ( dict->numelements > dict->gnumelements ) {
00948         dict->numelements--;
00949         M_free(dict->elements[dict->numelements], "Dictionary element");
00950         dict->elements[dict->numelements] = 0;
00951     }
00952 }
00953
00954 /*
00955 #] ShrinkDictionary :
00956 #[ DoPreOpenDictionary :
00957 */
00958
00959 int DoPreOpenDictionary(UBYTE *s)
00960 {
00961     UBYTE *name;
00962     int dict;
00963     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
00964     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
00965     while ( *s == ' ' ) s++;
00966
00967     name = s; s = SkipAName(s);
00968     if ( *s != 0 && *s != ';' ) {
00969         MesPrint("@proper syntax is #opendictionary name");
00970         return(-1);
00971     }
00972     *s = 0;
00973
00974     if ( AP.OpenDictionary > 0 ) {
00975         MesPrint("@you cannot nest #opendictionary instructions");
00976         MesPrint("@dictionary %s is open already",
00977             AO.Dictionaries[AP.OpenDictionary-1]->name);
00978         return(-1);
00979     }
00980     if ( AO.CurrentDictionary > 0 ) {
00981         MesPrint("@before opening a dictionary you have to first close the selected dictionary");
00982         return(-1);
00983     }
00984 /*
00985     Do we have this dictionary already?
00986 */
00987     dict = FindDictionary(name);
00988     if ( dict == 0 ) dict = AddDictionary(name);
00989     AP.OpenDictionary = dict;
00990     return(0);
00991 }
00992
00993 /*
00994 #] DoPreOpenDictionary :
00995 #[ DoPreCloseDictionary :
00996 */
00997
00998 int DoPreCloseDictionary(UBYTE *s)
00999 {
01000     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);

```

```

01001     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
01002     while ( *s == ' ' ) s++;
01003
01004     if ( AP.OpenDictionary == 0 && AO.CurrentDictionary == 0 ) {
01005         MesPrint("@you have neither an open, nor a selected dictionary");
01006         return(-1);
01007     }
01008
01009     AP.OpenDictionary = 0;
01010     AO.CurrentDictionary = 0;
01011
01012     AO.CurDictNotInFunctions = 0;
01013
01014     return(0);
01015 }
01016
01017 /*
01018 #] DoPreCloseDictionary :
01019 #[ DoPreUseDictionary :
01020 */
01021
01022 int DoPreUseDictionary(UBYTE *s)
01023 {
01024     UBYTE *options, c, *ss, *sss, *name;
01025     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
01026     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
01027     while ( *s == ' ' ) s++;
01028
01029     if ( AP.OpenDictionary > 0 ) {
01030         MesPrint("@before selecting a dictionary you have to first close the open dictionary");
01031         return(-1);
01032     }
01033
01034     name = s; s = SkipAName(s);
01035     ss = s; while ( *s && *s != ' ' ) s++;
01036     c = *ss; *ss = 0;
01037     if ( c == 0 ) {
01038         options = ss;
01039     }
01040     else {
01041         options = s+1; SKIPBRA3(s)
01042         if ( *s != ')' ) {
01043             MesPrint("@Irregular end of %#UseDictionary instruction");
01044             return(-1);
01045         }
01046         sss = s;
01047         s++; while ( *s == ' ' || *s == '\t' || *s == ';' ) s++;
01048         *sss = 0;
01049         if ( *s ) {
01050             MesPrint("@Irregular end of %#UseDictionary instruction");
01051             return(-1);
01052         }
01053     }
01054     return(UseDictionary(name,options));
01055 }
01056
01057 /*
01058 #] DoPreUseDictionary :
01059 #[ DoPreAdd :
01060
01061 Syntax:
01062     #add left :right
01063     #add left : "right"
01064 Adds to the currently open dictionary
01065 */
01066
01067 int DoPreAdd(UBYTE *s)
01068 {
01069     UBYTE *left, *right;
01070
01071     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
01072     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
01073     while ( *s == ' ' ) s++;
01074
01075     if ( AP.OpenDictionary == 0 ) {
01076         MesPrint("@there is no open dictionary to add to");
01077         return(-1);
01078     }
01079     /*
01080 Scan to the : and mark the left and right parts.
01081 */
01082     left = s;
01083     while ( *s && *s != ';' ) {
01084         if ( *s == '[' ) { SKIPBRA1(s) s++; }
01085         else if ( *s == '{' ) { SKIPBRA2(s) s++; }
01086         else if ( *s == '(' ) { SKIPBRA3(s) s++; }
01087         else if ( *s == ']' || *s == '}' || *s == ')' ) {

```

```

01088         MesPrint("@unmatched brackets in #add instruction");
01089         return(-1);
01090     }
01091     else s++;
01092 }
01093 if ( *s == 0 ) {
01094     MesPrint("@Missing : in #add instruction");
01095     return(-1);
01096 }
01097 *s++ = 0;
01098 right = s;
01099 while ( *s == ' ' || *s == '\t' ) s++;
01100 if ( *s == '"' && s[1] ) {
01101     right = s+1;
01102     s = s+2;
01103     while ( *s ) s++;
01104     while ( s[-1] != '"' ) s--;
01105     if ( s <= right ) {
01106         MesPrint("@Irregular use of double quotes in #add instruction");
01107         return(-1);
01108     }
01109     s[-1] = 0;
01110 }
01111 return(AddToDictionary(AO.Dictionaries[AP.OpenDictionary-1],left,right));
01112 }
01113
01114 /*
01115  #] DoPreAdd :
01116  #[ DictToBytes :
01117  */
01118
01119 LONG DictToBytes(DICTIONARY *dict,UBYTE *buf)
01120 {
01121     int numelements = dict->numelements, sizeelement, i, j, x;
01122     UBYTE *s1, *s2 = buf;
01123     DICTIONARY_ELEMENT *e;
01124     /*
01125      First copy the struct
01126     */
01127     s1 = (UBYTE *)dict; j = sizeof(DICTIONARY);
01128     NCOPY(s2,s1,j)
01129     /*
01130      Now the elements. Put a size indicator in front of each of them.
01131     */
01132     for ( i = 0; i < numelements; i++ ) {
01133         e = dict->elements[i];
01134         sizeelement = sizeof(DICTIONARY_ELEMENT)+(e->size+1)*sizeof(WORD);
01135         s1 = (UBYTE *)e->rhs; x = 0;
01136         while ( *s1 ) { s1++; x++; }
01137         x /= sizeof(WORD);
01138         sizeelement += (x+1) * sizeof(WORD);
01139         s1 = (UBYTE *)(&sizeelement); j = sizeof(WORD); NCOPY(s2,s1,j)
01140         s1 = (UBYTE *)e; j = sizeof(DICTIONARY_ELEMENT); NCOPY(s2,s1,j)
01141         s1 = (UBYTE *)e->lhs; j = (e->size+1)*(sizeof(WORD)); NCOPY(s2,s1,j)
01142         s1 = (UBYTE *)e->rhs; j = (x+1)*(sizeof(WORD)); NCOPY(s2,s1,j)
01143     }
01144     return(s2-buf);
01145 }
01146
01147 /*
01148  #] DictToBytes :
01149  #[ DictFromBytes :
01150  */
01151
01152 DICTIONARY *DictFromBytes(UBYTE *buf)
01153 {
01154     DICTIONARY *dict = Malloc1(sizeof(DICTIONARY),"Dictionary");
01155     UBYTE *s1, *s2;
01156     int i, j, sizeelement;
01157     DICTIONARY_ELEMENT *e;
01158     /*
01159      First read the dictionary itself
01160     */
01161     s1 = buf;
01162     s2 = (UBYTE *)dict; j = sizeof(DICTIONARY); NCOPY(s2,s1,j)
01163     /*
01164      Allocate the elements array:
01165     */
01166     dict->elements = (DICTIONARY_ELEMENT **)Malloc1(
01167         sizeof(DICTIONARY_ELEMENT *)*dict->sizeelements,"dictionary elements");
01168     for ( i = 0; i < dict->numelements; i++ ) {
01169         s2 = (UBYTE *)(&sizeelement); j = sizeof(WORD); NCOPY(s2,s1,j)
01170         e = (DICTIONARY_ELEMENT *)Malloc1(sizeelement*sizeof(UBYTE),"dictionary element");
01171         dict->elements[i] = e;
01172         j = sizeelement; s2 = (UBYTE *)e; NCOPY(s2,s1,j)
01173         e->lhs = (WORD *) (e+1);
01174         e->rhs = e->lhs + e->size+1;

```




```

01175     }
01176     return(dict);
01177 }
01178
01179 /*
01180  #] DictFromBytes :
01181  */

```

4.27 dollar.c File Reference

#include "form3.h"
 Include dependency graph for dollar.c:

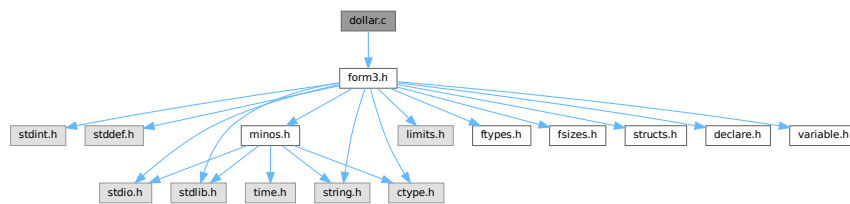

Macros

- #define [STEP2](#)

Functions

- int [CatchDollar](#) (int par)
- int [AssignDollar](#) (PHEAD WORD *term, WORD level)
- UBYTE * [WriteDollarToBuffer](#) (WORD numdollar, WORD par)
- UBYTE * [WriteDollarFactorToBuffer](#) (WORD numdollar, WORD numfac, WORD par)
- void [AddToDollarBuffer](#) (UBYTE *s)
- void [TermAssign](#) (WORD *term)
- int [PutTermInDollar](#) (WORD *term, WORD numdollar)
- void [WildDollars](#) (PHEAD WORD *term)
- WORD [DolToTensor](#) (PHEAD WORD numdollar)
- WORD [DolToFunction](#) (PHEAD WORD numdollar)
- WORD [DolToVector](#) (PHEAD WORD numdollar)
- WORD [DolToNumber](#) (PHEAD WORD numdollar)
- WORD [DolToSymbol](#) (PHEAD WORD numdollar)
- WORD [DolToIndex](#) (PHEAD WORD numdollar)
- DOLLARS [DolToTerms](#) (PHEAD WORD numdollar)
- LONG [DolToLong](#) (PHEAD WORD numdollar)
- int [ExeclInside](#) (UBYTE *s)
- int [InsideDollar](#) (PHEAD WORD *ll, WORD level)
- void [ExchangeDollars](#) (int num1, int num2)
- LONG [TermsInDollar](#) (WORD num)
- LONG [SizeOfDollar](#) (WORD num)
- UBYTE * [PrelfDollarEval](#) (UBYTE *s, int *value)
- WORD * [TranslateExpression](#) (UBYTE *s)
- int [IsSetMember](#) (WORD *buffer, WORD numset)

- int [IsMultipleOf](#) (WORD *buf1, WORD *buf2)
- int [TwoExprCompare](#) (WORD *buf1, WORD *buf2, int oprtr)
- int [DollarRaiseLow](#) (UBYTE *name, LONG value)
- WORD [EvalDoLoopArg](#) (PHEAD WORD *arg, WORD par)
- WORD [TestDoLoop](#) (PHEAD WORD *lhsbuf, WORD level)
- WORD [TestEndDoLoop](#) (PHEAD WORD *lhsbuf, WORD level)
- int [DollarFactorize](#) (PHEAD WORD numdollar)
- void [CleanDollarFactors](#) (DOLLARS d)
- WORD * [TakeDollarContent](#) (PHEAD WORD *dollarbuffer, WORD **factor)
- WORD * [MakeDollarInteger](#) (PHEAD WORD *bufin, WORD **bufout)
- WORD * [MakeDollarMod](#) (PHEAD WORD *buffer, WORD **bufout)
- int [GetDolNum](#) (PHEAD WORD *t, WORD *tstop)
- void [AddPotModdollar](#) (WORD numdollar)

4.27.1 Detailed Description

The routines that deal with the dollar variables. The name administration is to be found in the file [names.c](#)

Definition in file [dollar.c](#).

4.27.2 Macro Definition Documentation

4.27.2.1 STEP2

```
#define STEP2
```

Factors a dollar expression. Notation: d->nfactors becomes nonzero. if the number of factors is one, we leave d->factors zero. Otherwise factors is an array of pointers to the factors. These are pointers of the type FAC-DOLLAR. fd->where pointer to contents in term notation fd->size size of the buffer fd->where points to fd->type DOLNUMBER or DOLTERMS fd->value value if type is DOLNUMBER and it fits in a WORD.

Definition at line [2953](#) of file [dollar.c](#).

4.27.3 Function Documentation

4.27.3.1 CatchDollar()

```
int CatchDollar (
    int par )
```

Definition at line [54](#) of file [dollar.c](#).

4.27.3.2 AssignDollar()

```
int AssignDollar (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [209](#) of file [dollar.c](#).

4.27.3.3 WriteDollarToBuffer()

```
UBYTE * WriteDollarToBuffer (
    WORD numdollar,
    WORD par )
```

Definition at line 596 of file [dollar.c](#).

4.27.3.4 WriteDollarFactorToBuffer()

```
UBYTE * WriteDollarFactorToBuffer (
    WORD numdollar,
    WORD numfac,
    WORD par )
```

Definition at line 687 of file [dollar.c](#).

4.27.3.5 AddToDollarBuffer()

```
void AddToDollarBuffer (
    UBYTE * s )
```

Definition at line 762 of file [dollar.c](#).

4.27.3.6 TermAssign()

```
void TermAssign (
    WORD * term )
```

Definition at line 803 of file [dollar.c](#).

4.27.3.7 PutTermInDollar()

```
int PutTermInDollar (
    WORD * term,
    WORD numdollar )
```

Definition at line 863 of file [dollar.c](#).

4.27.3.8 WildDollars()

```
void WildDollars (
    PHEAD WORD * term )
```

Definition at line 891 of file [dollar.c](#).

4.27.3.9 DolToTensor()

```
WORD DolToTensor (
    PHEAD WORD numdollar )
```

Definition at line [1082](#) of file [dollar.c](#).

4.27.3.10 DolToFunction()

```
WORD DolToFunction (
    PHEAD WORD numdollar )
```

Definition at line [1143](#) of file [dollar.c](#).

4.27.3.11 DolToVector()

```
WORD DolToVector (
    PHEAD WORD numdollar )
```

Definition at line [1200](#) of file [dollar.c](#).

4.27.3.12 DolToNumber()

```
WORD DolToNumber (
    PHEAD WORD numdollar )
```

Definition at line [1264](#) of file [dollar.c](#).

4.27.3.13 DolToSymbol()

```
WORD DolToSymbol (
    PHEAD WORD numdollar )
```

Definition at line [1323](#) of file [dollar.c](#).

4.27.3.14 DolToIndex()

```
WORD DolToIndex (
    PHEAD WORD numdollar )
```

Definition at line [1377](#) of file [dollar.c](#).

4.27.3.15 DolToTerms()

```
DOLLARS DolToTerms (
    PHEAD WORD numdollar )
```

Definition at line [1458](#) of file [dollar.c](#).

4.27.3.16 DolToLong()

```
LONG DolToLong (
    PHEAD WORD numdollar )
```

Definition at line [1606](#) of file [dollar.c](#).

4.27.3.17 ExecInside()

```
int ExecInside (
    UBYTE * s )
```

Definition at line [1681](#) of file [dollar.c](#).

4.27.3.18 InsideDollar()

```
int InsideDollar (
    PHEAD WORD * ll,
    WORD level )
```

Definition at line [1746](#) of file [dollar.c](#).

4.27.3.19 ExchangeDollars()

```
void ExchangeDollars (
    int num1,
    int num2 )
```

Definition at line [1849](#) of file [dollar.c](#).

4.27.3.20 TermsInDollar()

```
LONG TermsInDollar (
    WORD num )
```

Definition at line [1867](#) of file [dollar.c](#).

4.27.3.21 SizeOfDollar()

```
LONG SizeOfDollar (
    WORD num )
```

Definition at line [1916](#) of file [dollar.c](#).

4.27.3.22 PreIfDollarEval()

```
UBYTE * PreIfDollarEval (
    UBYTE * s,
    int * value )
```

Definition at line [1978](#) of file [dollar.c](#).

4.27.3.23 TranslateExpression()

```
WORD * TranslateExpression (
    UBYTE * s )
```

Definition at line [2160](#) of file [dollar.c](#).

4.27.3.24 IsSetMember()

```
int IsSetMember (
    WORD * buffer,
    WORD numset )
```

Definition at line [2217](#) of file [dollar.c](#).

4.27.3.25 IsMultipleOf()

```
int IsMultipleOf (
    WORD * buf1,
    WORD * buf2 )
```

Definition at line [2398](#) of file [dollar.c](#).

4.27.3.26 TwoExprCompare()

```
int TwoExprCompare (
    WORD * buf1,
    WORD * buf2,
    int oprtr )
```

Definition at line [2473](#) of file [dollar.c](#).

4.27.3.27 DollarRaiseLow()

```
int DollarRaiseLow (
    UBYTE * name,
    LONG value )
```

Definition at line [2552](#) of file [dollar.c](#).

4.27.3.28 EvalDoLoopArg()

```
WORD EvalDoLoopArg (  
    PHEAD WORD * arg,  
    WORD par )
```

Evaluates one argument of a do loop. Such an argument is constructed from SNUMBERS DOLLAREXPRES-
SIONs and possibly DOLLAREXPR2s which indicate factors of the preceding dollar. Hence we have SNUM-
BER,num DOLLAREXPRESSSION,numdollar DOLLAREXPRESSSION,numdollar,DOLLAREXPR2,numfactor DOL-
LAREXPRESSSION,numdollar,DOLLAREXPR2,numfactor,DOLLAREXPR2,numfactor etc. Because we have a do-
loop at every stage we should have a number. The notation in DOLLAREXPR2 is that ≥ 0 is number of yet another
dollar and < 0 is $-n-1$ with n the array element or zero. The return value is the (short) number. The routine works its
way through the list in a recursive manner.

Definition at line [2651](#) of file [dollar.c](#).

References [EvalDoLoopArg\(\)](#).

Referenced by [EvalDoLoopArg\(\)](#).

Here is the call graph for this function:



4.27.3.29 TestDoLoop()

```
WORD TestDoLoop (  
    PHEAD WORD * lhsbuf,  
    WORD level )
```

Definition at line [2762](#) of file [dollar.c](#).

4.27.3.30 TestEndDoLoop()

```
WORD TestEndDoLoop (  
    PHEAD WORD * lhsbuf,  
    WORD level )
```

Definition at line [2840](#) of file [dollar.c](#).

4.27.3.31 DollarFactorize()

```
int DollarFactorize (
    PHEAD WORD numdollar )
```

Definition at line 2955 of file [dollar.c](#).

4.27.3.32 CleanDollarFactors()

```
void CleanDollarFactors (
    DOLLARS d )
```

Definition at line 3554 of file [dollar.c](#).

4.27.3.33 TakeDollarContent()

```
WORD * TakeDollarContent (
    PHEAD WORD * dollarbuffer,
    WORD ** factor )
```

Definition at line 3576 of file [dollar.c](#).

4.27.3.34 MakeDollarInteger()

```
WORD * MakeDollarInteger (
    PHEAD WORD * bufin,
    WORD ** bufout )
```

For normalizing everything to integers we have to determine for all elements of this argument the LCM of the denominators and the GCD of the numerators. The input argument is in *bufin*. The number that comes out is the return value. The normalized argument is in *bufout*.

Definition at line 3628 of file [dollar.c](#).

References [EndSort\(\)](#), [Generator\(\)](#), and [NewSort\(\)](#).

4.28 dollar.c

[Go to the documentation of this file.](#)

```

00001
00006 /* #[] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032 /*
00033 * #[] Includes :
00034 */
00035
00036 #include "form3.h"
00037
00038 /* EXTERNLOCK(dummylock) */
00039
00040 static UBYTE underscore[2] = {'_',0};
00041
00042 /*
00043 * #[] Includes :
00044 * #[] CatchDollar :
00045
00046 Works out a dollar expression during compile type.
00047 Steals it from the buffer and puts it in an assignment.
00048 At the moment we should keep this inside the small buffer.
00049 Later with more sort buffers we can do this better.
00050 Par == 0 : regular assignment
00051 par == -1: after error. Just make zero for now.
00052 */
00053
00054 int CatchDollar(int par)
00055 {
00056     GETIDENTITY
00057     CBUF *C = cbuf + AC.cbufnum;
00058     int error = 0, numterms = 0, numdollar, resetmods = 0;
00059     LONG newsize, retval;
00060     WORD *w, *t, n, nsize, *oldwork = AT.WorkPointer, *dbuffer;
00061     WORD oldncmod = AN.ncmod;
00062     DOLLARS d;
00063     if ( AN.ncmod && ( ( AC.modmode & ALSODOLLARS ) == 0 ) ) AN.ncmod = 0;
00064     if ( AN.ncmod && AN.cmod == 0 ) { SetMods(); resetmods = 1; }
00065
00066     numdollar = C->lhs[C->numlhs][2];
00067
00068     d = Dollars+numdollar;
00069     if ( par == -1 ) {
00070         d->type = DOLUNDEFINED;
00071         cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00072         cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00073         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"$-buffer old");
00074         d->size = 0; d->where = &(AM.dollarzero);
00075         cbuf[AM.dbufnum].rhs[numdollar] = d->where;
00076         AN.ncmod = oldncmod;
00077         if ( resetmods ) UnSetMods();
00078         return(0);
00079     }
00080 #ifdef WITHMPI
00081 /*
00082 * The problem here is that only the master can make an assignment
00083 * like $a=g; where g is an expression: only the master has an access to
00084 * the expression. So, in cases where the RHS contains expression names,
00085 * only the master invokes Generator() and then broadcasts the result to
00086 * the all slaves.

```

```

00087      * Broadcasting must be performed immediately; one cannot postpone it
00088      * to the end of the module because the dollar variable is visible
00089      * in the current module. For the same reason, this should be done
00090      * regardless of on/off parallel status.
00091      * If the RHS does not contain any expression names, it can be processed
00092      * in each slave.
00093      */
00094      if ( PF.me == MASTER || !AC.RhsExprInModuleFlag ) {
00095 #endif
00096
00097      EXCHINOUT
00098
00099      if ( NewSort(BHEAD0) ) { if ( !error ) error = 1; goto onerror; }
00100      if ( NewSort(BHEAD0) ) {
00101          LowerSortLevel();
00102          if ( !error ) error = 1;
00103          goto onerror;
00104      }
00105      AN.RepPoint = AT.RepCount + 1;
00106      w = C->rhs[C->lhs[C->numlhs][5]];
00107      while ( *w ) {
00108          n = *w; t = oldwork;
00109          NCOPY(t,w,n);
00110          AT.WorkPointer = t;
00111          AR.Cnumlhs = C->numlhs;
00112          if ( Generator(BHEAD oldwork,C->numlhs) ) { error = 1; break; }
00113      }
00114      AT.WorkPointer = oldwork;
00115      AN.tryterm = 0; /* for now */
00116      dbuffer = 0;
00117      if ( ( retval = EndSort(BHEAD (WORD *)((void *)&dbuffer)),2) < 0 ) { error = 1; }
00118      LowerSortLevel();
00119      if ( retval <= 1 || dbuffer == 0 ) {
00120          d->type = DOLZERO;
00121          if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"$-buffer old");
00122          d->size = 0; d->where = &(AM.dollarzero);
00123          cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00124          cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00125          goto docopy2;
00126      }
00127      w = dbuffer;
00128      if ( error == 0 )
00129          while ( *w ) { w += *w; numterms++; }
00130      else
00131          goto onerror;
00132      newsize = (w-dbuffer)+1;
00133 #ifdef WITHMPI
00134      }
00135      if ( AC.RhsExprInModuleFlag )
00136          /* PF_BroadcastPreDollar allocates dbuffer for slaves! */
00137          if ( (error = PF_BroadcastPreDollar(&dbuffer, &newsize, &numterms)) != 0 )
00138              goto onerror;
00139 #endif
00140      if ( newsize < MINALLOC ) newsize = MINALLOC;
00141      newsize = (newsize+7)/8*8;
00142      if ( numterms == 0 ) {
00143          d->type = DOLZERO;
00144          goto docopy;
00145      }
00146      else if ( numterms == 1 ) {
00147          t = dbuffer;
00148          n = *t;
00149          nsize = t[n-1];
00150          if ( nsize < 0 ) { nsize = -nsize; }
00151          if ( nsize == (n-1) ) { /* numerical */
00152              nsize = (nsize-1)/2;
00153              w = t + 1 + nsize;
00154              if ( *w != 1 ) goto doterms;
00155              w++; while ( w < ( t + n - 1 ) ) { if ( *w ) break; w++; }
00156              if ( w < ( t + n - 1 ) ) goto doterms;
00157              d->type = DOLNUMBER;
00158              goto docopy;
00159          }
00160          else if ( n == 7 && t[6] == 3 && t[5] == 1 && t[4] == 1
00161                  && t[1] == INDEX && t[2] == 3 ) {
00162              d->type = DOLINDEX;
00163              d->index = t[3];
00164              goto docopy;
00165          }
00166          else goto doterms;
00167      }
00168      else {
00169      doterms:;
00170          d->type = DOLTERMS;
00171          cbuf[AM.dbufnum].CanCommu[numdollar] = numcommute(dbuffer,
00172                  &(cbuf[AM.dbufnum].NumTerms[numdollar]));
00173      docopy:;

```

```

00174         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"$-buffer old");
00175         d->size = newsize; d->where = dbuffer;
00176 docopy2;;
00177         cbuf[AM.dbufnum].rhs[numdollar] = d->where;
00178     }
00179     if ( C->Pointer > C->rhs[C->numrhs] ) C->Pointer = C->rhs[C->numrhs];
00180     C->numlhs--; C->numrhs--;
00181 onerror:
00182 #ifdef WITHMPI
00183     if ( PF.me == MASTER || !AC.RhsExprInModuleFlag )
00184 #endif
00185     BACKINOUT
00186     AN.ncmod = oldncmod;
00187     if ( resetmods ) UnSetMods();
00188     return(error);
00189 }
00190
00191 /*
00192  #] CatchDollar :
00193  #[ AssignDollar :
00194
00195  To be called from Generator. Assigns an expression to a $ variable.
00196  This one is slightly different from CatchDollar.
00197  We have no easy buffer this time.
00198  We will have to hack our way using what we normally use for functions.
00199
00200  Note that in the threaded case we trust the user. That means that
00201  we are not going to recheck whether there is a maximum, minimum or sum.
00202  If the user says it is like that, we treat it like that.
00203  We only check that in this centralized version MODLOCAL isn't used.
00204
00205  In a later stage dtype could be used for actually checking MODMAX
00206  and MODMIN cases.
00207 */
00208
00209 int AssignDollar(PHEAD WORD *term, WORD level)
00210 {
00211     GETBIDENTITY
00212     CBUF *C = cbuf+AM.rbufnum;
00213     int numterms = 0, numdollar = C->lhs[level][2];
00214     LONG newsize;
00215     DOLLARS d = Dollars + numdollar;
00216     WORD *w, *t, n, nsize, *rh = cbuf[C->lhs[level][7]].rhs[C->lhs[level][5]];
00217     WORD *ss, *ww;
00218     WORD olddefer, oldcompress, oldncmod = AN.ncmod;
00219 #ifdef WITHPTHREADS
00220     int nummodopt, dtype = -1, dw;
00221     WORD numvalue;
00222     if ( AN.ncmod && ( ( AC.modmode & ALSODOLLARS ) == 0 ) ) AN.ncmod = 0;
00223     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
00224 /*
00225         Here we come only when the module runs with more than one thread.
00226         This must be a variable with a special module option.
00227         For the multi-threaded version we only allow MODSUM, MODMAX and MODMIN.
00228 */
00229         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00230             if ( numdollar == ModOptdollars[nummodopt].number ) break;
00231         }
00232         if ( nummodopt >= NumModOptdollars ) {
00233             MLOCK(ErrorMessageLock);
00234             MesPrint("Illegal attempt to change $-variable in multi-threaded module %1",AC.CModule);
00235             MUNLOCK(ErrorMessageLock);
00236             Terminate(-1);
00237         }
00238         dtype = ModOptdollars[nummodopt].type;
00239         if ( dtype == MODLOCAL ) {
00240             d = ModOptdollars[nummodopt].dstruct+AT.identity;
00241         }
00242     }
00243 #endif
00244     DUMMYUSE(term);
00245     w = rh;
00246 /*
00247     First some shortcuts
00248 */
00249     if ( *w == 0 ) {
00250 /*
00251         #[ Thread version : Zero case
00252 */
00253 #ifdef WITHPTHREADS
00254         if ( dtype > 0 ) {
00255 /*             LOCK(d->pthreadlockwrite); */
00256             LOCK(d->pthreadlockread);
00257 NewValIsZero;;
00258             switch ( d->type ) {
00259                 case DOLZERO: goto NoChangeZero;
00260                 case DOLNUMBER:

```

```

00261         case DOLTERMS:
00262             if ( ( dw = d->where[0] ) > 0 && d->where[dw] != 0 ) {
00263                 break; /* was not a single number. Trust the user */
00264             }
00265             if ( dtype == MODMAX && d->where[dw-1] >= 0 ) goto NoChangeZero;
00266             if ( dtype == MODMIN && d->where[dw-1] <= 0 ) goto NoChangeZero;
00267             break;
00268         default:
00269             numvalue = DolToNumber(BHEAD numdollar);
00270             if ( AN.ErrorInDollar != 0 ) break;
00271             if ( dtype == MODMAX && numvalue >= 0 ) goto NoChangeZero;
00272             if ( dtype == MODMIN && numvalue <= 0 ) goto NoChangeZero;
00273             break;
00274     }
00275     d->type = DOLZERO;
00276     d->where[0] = 0;
00277     cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00278     cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00279 NoChangeZero:;
00280     CleanDollarFactors(d);
00281     /* UNLOCK(d->pthreadlockwrite); */
00282     UNLOCK(d->pthreadlockread);
00283     AN.ncmod = oldncmod;
00284     return(0);
00285 }
00286 #endif
00287 /*
00288     #] Thread version :
00289 */
00290     d->type = DOLZERO;
00291     d->where[0] = 0;
00292     cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00293     cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00294     CleanDollarFactors(d);
00295     AN.ncmod = oldncmod;
00296     return(0);
00297 }
00298 else if ( *w == 4 && w[4] == 0 && w[2] == 1 ) {
00299     /*
00300         #[ Thread version : New value is 'single precision'
00301     */
00302     #ifdef WITHPTHREADS
00303         if ( dtype > 0 ) {
00304             /* LOCK(d->pthreadlockwrite); */
00305             LOCK(d->pthreadlockread);
00306             if ( d->size < MINALLOC ) {
00307                 WORD oldsize, *oldwhere, i;
00308                 oldsize = d->size; oldwhere = d->where;
00309                 d->size = MINALLOC;
00310                 d->where = (WORD *)Malloc1(d->size*sizeof(WORD),"dollar contents");
00311                 cbuf[AM.dbufnum].rhs[numdollar] = d->where;
00312                 if ( oldsize > 0 ) {
00313                     for ( i = 0; i < oldsize; i++ ) d->where[i] = oldwhere[i];
00314                 }
00315                 else d->where[0] = 0;
00316                 if ( oldwhere && oldwhere != &(AM.dollarzero) ) M_free(oldwhere,"dollar contents");
00317             }
00318             switch ( d->type ) {
00319                 case DOLZERO:
00320 HandleDolZero:;
00321                     if ( dtype == MODMAX && w[3] <= 0 ) goto NoChangeOne;
00322                     if ( dtype == MODMIN && w[3] >= 0 ) goto NoChangeOne;
00323                     break;
00324                     case DOLNUMBER:
00325                     case DOLTERMS:
00326                         if ( ( dw = d->where[0] ) > 0 && d->where[dw] != 0 ) {
00327                             break; /* was not a single number. Trust the user */
00328                         }
00329                         if ( dtype == MODMAX && CompCoef(d->where,w) >= 0 ) goto NoChangeOne;
00330                         if ( dtype == MODMIN && CompCoef(d->where,w) <= 0 ) goto NoChangeOne;
00331                         break;
00332                     default:
00333                         {
00334                             /*
00335                                 Note that we convert the type for the next time around.
00336                             */
00337                             WORD extraterm[4];
00338                             numvalue = DolToNumber(BHEAD numdollar);
00339                             if ( AN.ErrorInDollar != 0 ) break;
00340                             if ( numvalue == 0 ) {
00341                                 d->type = DOLZERO;
00342                                 d->where[0] = 0;
00343                                 cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00344                                 cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00345                                 goto HandleDolZero;
00346                             }
00347                             d->where[0] = extraterm[0] = 4;

```

```

00348             d->where[1] = extraterm[1] = ABS(numvalue);
00349             d->where[2] = extraterm[2] = 1;
00350             d->where[3] = extraterm[3] = numvalue > 0 ? 3 : -3;
00351             d->where[4] = 0;
00352             d->type = DOLNUMBER;
00353             if ( dtype == MODMAX && CompCoef(extraterm,w) >= 0 ) goto NoChangeOne;
00354             if ( dtype == MODMIN && CompCoef(extraterm,w) <= 0 ) goto NoChangeOne;
00355             break;
00356         }
00357     }
00358     d->where[0] = w[0];
00359     d->where[1] = w[1];
00360     d->where[2] = w[2];
00361     d->where[3] = w[3];
00362     d->where[4] = 0;
00363     d->type = DOLNUMBER;
00364     cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00365     cbuf[AM.dbufnum].NumTerms[numdollar] = 1;
00366     NoChangeOne;
00367     CleanDollarFactors(d);
00368     /* UNLOCK(d->pthreadlockwrite); */
00369     UNLOCK(d->pthreadlockread);
00370     AN.ncmod = oldncmod;
00371     return(0);
00372 }
00373 #endif
00374 /*
00375     #] Thread version :
00376 */
00377     if ( d->size < MINALLOC ) {
00378         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollar contents");
00379         d->size = MINALLOC;
00380         d->where = (WORD *)Malloc1(d->size*sizeof(WORD),"dollar contents");
00381         cbuf[AM.dbufnum].rhs[numdollar] = d->where;
00382     }
00383     d->where[0] = w[0];
00384     d->where[1] = w[1];
00385     d->where[2] = w[2];
00386     d->where[3] = w[3];
00387     d->where[4] = 0;
00388     d->type = DOLNUMBER;
00389     cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00390     cbuf[AM.dbufnum].NumTerms[numdollar] = 1;
00391     CleanDollarFactors(d);
00392     AN.ncmod = oldncmod;
00393     return(0);
00394 }
00395 /*
00396     Now the real evaluation.
00397     In the case of threads and MODSUM this requires an immediate lock.
00398     Otherwise the lock could be placed later.
00399 */
00400 #ifdef WITHPTHREADS
00401     if ( dtype == MODSUM ) {
00402         /* LOCK(d->pthreadlockwrite); */
00403         LOCK(d->pthreadlockread);
00404     }
00405 #endif
00406     CleanDollarFactors(d);
00407     /*
00408         The following case cannot occur. We treated it already
00409     */
00410     if ( *w == 0 ) {
00411         ss = 0; numterms = 0; newsize = 0;
00412         olddefer = AR.DeferFlag; AR.DeferFlag = 0;
00413         oldcompress = AR.NoCompress; AR.NoCompress = 1;
00414     }
00415     else
00416     /*
00417         {
00418         /*
00419             New value is an expression that has to be evaluated first
00420             This is all generic. It won't foliate due to the sort level
00421         */
00422         if ( NewSort(BHEAD0) ) {
00423             AN.ncmod = oldncmod;
00424             return(1);
00425         }
00426         olddefer = AR.DeferFlag; AR.DeferFlag = 0;
00427         oldcompress = AR.NoCompress; AR.NoCompress = 1;
00428         while ( *w ) {
00429             n = *w; t = ww = AT.WorkPointer;
00430             NCOPY(t,w,n);
00431             AT.WorkPointer = t;
00432             if ( Generator(BHEAD ww,AR.Cnumlhs) ) {
00433                 AT.WorkPointer = ww;
00434                 LowerSortLevel();

```

```

00435         AR.DeferFlag = olddefer;
00436         AN.ncmod = oldncmod;
00437         return(1);
00438     }
00439     AT.WorkPointer = ww;
00440 }
00441 AN.tryterm = 0; /* for now */
00442 if ( ( newsize = EndSort(BHEAD (WORD *) ((void *) (&ss)), 2) ) < 0 ) {
00443     AN.ncmod = oldncmod;
00444     return(1);
00445 }
00446 numterms = 0; t = ss; while ( *t ) { numterms++; t += *t; }
00447 }
00448 #ifdef WITHPTHREADS
00449     if ( dtype != MODSUM ) {
00450         /* LOCK(d->pthreadlockwrite); */
00451         LOCK(d->pthreadlockread);
00452     }
00453 #endif
00454     if ( numterms == 0 ) {
00455         /*
00456             the new value evaluates to zero
00457         */
00458         #ifdef WITHPTHREADS
00459             if ( dtype == MODMAX || dtype == MODMIN ) {
00460                 if ( ss ) { M_free(ss, "Sort of $"); ss = 0; }
00461                 AR.DeferFlag = olddefer; AR.NoCompress = oldcompress;
00462                 goto NewValIsZero;
00463             }
00464             else
00465         #endif
00466         {
00467             if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where, "dollar contents");
00468             d->where = &(AM.dollarzero);
00469             d->size = 0;
00470             cbuf[AM.dbufnum].rhs[numdollar] = 0;
00471             cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00472             cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00473             d->type = DOLZERO;
00474         }
00475         if ( ss ) { M_free(ss, "Sort of $"); ss = 0; }
00476     }
00477     else {
00478         /*
00479             #! Thread version :
00480         */
00481         #ifdef WITHPTHREADS
00482             if ( dtype == MODMAX || dtype == MODMIN ) {
00483                 if ( numterms == 1 && ( *ss-1 == ABS(ss[*ss-1]) ) ) { /* is number */
00484                     switch ( d->type ) {
00485                         case DOLZERO:
00486                             HandleDolZero1:
00487                                 if ( dtype == MODMAX && ss[*ss-1] > 0 ) break;
00488                                 if ( dtype == MODMIN && ss[*ss-1] < 0 ) break;
00489                                 if ( ss ) { M_free(ss, "Sort of $"); ss = 0; }
00490                                 AR.DeferFlag = olddefer; AR.NoCompress = oldcompress;
00491                                 goto NoChange;
00492                             case DOLTERMS:
00493                             case DOLNUMBER:
00494                                 if ( ( dw = d->where[0] ) > 0 && d->where[dw] != 0 ) break;
00495                                 if ( dtype == MODMAX && CompCoef(ss, d->where) > 0 ) break;
00496                                 if ( dtype == MODMIN && CompCoef(ss, d->where) < 0 ) break;
00497                                 if ( ss ) { M_free(ss, "Sort of $"); ss = 0; }
00498                                 AR.DeferFlag = olddefer; AR.NoCompress = oldcompress;
00499                                 goto NoChange;
00500                             default: {
00501                                 WORD extraterm[4];
00502                                 numvalue = DolToNumber(BHEAD numdollar);
00503                                 if ( AN.ErrorInDollar != 0 ) break;
00504                                 if ( numvalue == 0 ) {
00505                                     d->type = DOLZERO;
00506                                     d->where[0] = 0;
00507                                     cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00508                                     cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
00509                                     goto HandleDolZero1;
00510                                 }
00511                                 d->where[0] = extraterm[0] = 4;
00512                                 d->where[1] = extraterm[1] = ABS(numvalue);
00513                                 d->where[2] = extraterm[2] = 1;
00514                                 d->where[3] = extraterm[3] = numvalue > 0 ? 3 : -3;
00515                                 d->where[4] = 0;
00516                                 d->type = DOLNUMBER;
00517                                 if ( dtype == MODMAX && CompCoef(ss, extraterm) > 0 ) break;
00518                                 if ( dtype == MODMIN && CompCoef(ss, extraterm) < 0 ) break;
00519                                 if ( ss ) { M_free(ss, "Sort of $"); ss = 0; }
00520                                 AR.DeferFlag = olddefer; AR.NoCompress = oldcompress;
00521                                 goto NoChange;

```



```

00522     }
00523     }
00524     }
00525     else {
00526         if ( ss ) { M_free(ss,"Sort of $"); ss = 0; }
00527         AR.DeferFlag = olddefer; AR.NoCompress = oldcompress;
00528         goto NoChange;
00529     }
00530 }
00531 #endif
00532 /*
00533     #] Thread version :
00534 */
00535     d->type = DOLTERMS;
00536     if ( d->where && d->where != &(AM.dollarzero) ) { M_free(d->where,"dollar contents"); d->where
= 0; }
00537     d->size = newsize + 1;
00538     d->where = ss;
00539     cbuf[AM.dbufnum].rhs[numdollar] = w = d->where;
00540 }
00541     AR.DeferFlag = olddefer; AR.NoCompress = oldcompress;
00542 /*
00543     Now find the special cases
00544 */
00545     if ( numterms == 0 ) {
00546         d->type = DOLZERO;
00547     }
00548     else if ( numterms == 1 ) {
00549         t = d->where;
00550         n = *t;
00551         nsize = t[n-1];
00552         if ( nsize < 0 ) { nsize = -nsize; }
00553         if ( nsize == (n-1) ) {
00554             nsize = (nsize-1)/2;
00555             w = t + 1 + nsize;
00556             if ( *w == 1 ) {
00557                 w++; while ( w < ( t + n - 1 ) ) { if ( *w ) break; w++; }
00558                 if ( w >= ( t + n - 1 ) ) d->type = DOLNUMBER;
00559             }
00560         }
00561         else if ( n == 7 && t[6] == 3 && t[5] == 1 && t[4] == 1
&& t[1] == INDEX && t[2] == 3 ) {
00562             d->type = DOLINDEX;
00563             d->index = t[3];
00564         }
00565     }
00566 }
00567     if ( d->type == DOLTERMS ) {
00568         cbuf[AM.dbufnum].CanCommu[numdollar] = numcommute(d->where,
&cbuf[AM.dbufnum].NumTerms[numdollar]);
00569     }
00570     else {
00571         cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
00572         cbuf[AM.dbufnum].NumTerms[numdollar] = 1;
00573     }
00574 }
00575 #ifdef WITHPTHREADS
00576 NoChange;;
00577 /* UNLOCK(d->pthreadlockwrite); */
00578 UNLOCK(d->pthreadlockread);
00579 #endif
00580     AN.ncmod = oldncmod;
00581     return(0);
00582 }
00583
00584 /*
00585     #] AssignDollar :
00586     #[ WriteDollarToBuffer :
00587
00588     Takes the numbered dollar expression and writes it to output.
00589     We catch however the output in a buffer and return its address.
00590     This routine is needed when we need a text representation of
00591     a dollar expression like for the construction '$name' in the preprocessor.
00592     If par==0 we leave the current printing mode.
00593     If par==1 we insist on normal mode
00594 */
00595
00596 UBYTE *WriteDollarToBuffer(WORD numdollar, WORD par)
00597 {
00598     DOLLARS d = Dollars+numdollar;
00599     UBYTE *s, *oldcurbufwrt = AO.CurBufWrt;
00600     WORD *t, lbrac = 0, first = 0, arg[2], oldOutputMode = AC.OutputMode;
00601     WORD oldinfrack = AO.InFbrack;
00602     int error = 0;
00603     int dict = AO.CurrentDictionary;
00604
00605     AO.DollarOutSizeBuffer = 32;
00606     AO.DollarOutBuffer = (UBYTE *)Malloc1(AO.DollarOutSizeBuffer,"DollarOutBuffer");
00607     AO.DollarInOutBuffer = 1;

```

```

00608     AO.PrintType = 1;
00609     AO.InFbrack = 0;
00610     s = AO.DollarOutBuffer;
00611     *s = 0;
00612     if ( par > 0 && AO.CurDictInDollars == 0 ) {
00613         AC.OutputMode = NORMALFORMAT;
00614         AO.CurrentDictionary = 0;
00615     }
00616     else {
00617         AO.CurBufWrt = (UBYTE *)underscore;
00618     }
00619     AO.OutInBuffer = 1;
00620     switch ( d->type ) {
00621     case DOLARGUMENT:
00622         WriteArgument(d->where);
00623         break;
00624     case DOLSUBTERM:
00625         WriteSubTerm(d->where,1);
00626         break;
00627     case DOLNUMBER:
00628     case DOLTERMS:
00629         t = d->where;
00630         while ( *t ) {
00631             if ( WriteTerm(t,&lbrac,first,PRINTON,0) ) {
00632                 error = 1; break;
00633             }
00634             t += *t;
00635         }
00636         break;
00637     case DOLWILDARGS:
00638         t = d->where+1;
00639         while ( *t ) {
00640             WriteArgument(t);
00641             NEXTARG(t)
00642             if ( *t ) TokenToLine((UBYTE *)(","));
00643         }
00644         break;
00645     case DOLINDEX:
00646         arg[0] = -INDEX; arg[1] = d->index;
00647         WriteArgument(arg);
00648         break;
00649     case DOLZERO:
00650         *s++ = '0'; *s = 0;
00651         AO.DollarInOutBuffer = 1;
00652         break;
00653     case DOLUNDEFINED:
00654         *s = 0;
00655         AO.DollarInOutBuffer = 1;
00656         break;
00657     }
00658     AC.OutputMode = oldOutputMode;
00659     AO.OutInBuffer = 0;
00660     AO.InFbrack = oldinfbrack;
00661     AO.CurBufWrt = oldcurbufwrt;
00662     AO.CurrentDictionary = dict;
00663     if ( error ) {
00664         MLOCK(ErrorMessageLock);
00665         MesPrint("&Illegal dollar object for writing");
00666         MUNLOCK(ErrorMessageLock);
00667         M_free(AO.DollarOutBuffer,"DollarOutBuffer");
00668         AO.DollarOutBuffer = 0;
00669         AO.DollarOutSizeBuffer = 0;
00670         return(0);
00671     }
00672     return(AO.DollarOutBuffer);
00673 }
00674
00675 /*
00676 #] WriteDollarToBuffer :
00677 #[ WriteDollarFactorToBuffer :
00678
00679 Takes the numbered dollar expression and writes it to output.
00680 We catch however the output in a buffer and return its address.
00681 This routine is needed when we need a text representation of
00682 a dollar expression like for the construction '$name' in the preprocessor.
00683 If par==0 we leave the current printing mode.
00684 If par==1 we insist on normal mode
00685 */
00686
00687 UBYTE *WriteDollarFactorToBuffer(WORD numdollar, WORD numfac, WORD par)
00688 {
00689     DOLLARS d = Dollars+numdollar;
00690     UBYTE *s, *oldcurbufwrt = AO.CurBufWrt;
00691     WORD *t, lbrac = 0, first = 0, n[5], oldOutputMode = AC.OutputMode;
00692     WORD oldinfbrack = AO.InFbrack;
00693     int error = 0;
00694     int dict = AO.CurrentDictionary;

```

```

00695
00696     if ( numfac > d->nfactors || numfac < 0 ) {
00697         MLOCK(ErrorMessageLock);
00698         MesPrint("&Illegal factor number for this dollar variable: %d",numfac);
00699         MesPrint("&There are %d factors",d->nfactors);
00700         MUNLOCK(ErrorMessageLock);
00701         return(0);
00702     }
00703
00704     AO.DollarOutSizeBuffer = 32;
00705     AO.DollarOutBuffer = (UBYTE *)Malloca1(AO.DollarOutSizeBuffer,"DollarOutBuffer");
00706     AO.DollarInOutBuffer = 1;
00707     AO.PrintType = 1;
00708     AO.InFbrack = 0;
00709     s = AO.DollarOutBuffer;
00710     *s = 0;
00711     if ( par > 0 ) {
00712         AC.OutputMode = NORMALFORMAT;
00713         AO.CurrentDictionary = 0;
00714     }
00715     else {
00716         AO.CurBufWrt = (UBYTE *)underscore;
00717     }
00718     AO.OutInBuffer = 1;
00719     if ( numfac == 0 ) { /* write the number d->nfactors */
00720         n[0] = 4; n[1] = d->nfactors; n[2] = 1; n[3] = 3; n[4] = 0; t = n;
00721     }
00722     else if ( numfac == 1 && d->factors == 0 ) { /* Here d->factors is zero and d->where is fine */
00723         t = d->where;
00724     }
00725     else if ( d->factors[numfac-1].where == 0 ) { /* write the value */
00726         if ( d->factors[numfac-1].value < 0 ) {
00727             n[0] = 4; n[1] = -d->factors[numfac-1].value; n[2] = 1; n[3] = -3; n[4] = 0; t = n;
00728         }
00729         else {
00730             n[0] = 4; n[1] = d->factors[numfac-1].value; n[2] = 1; n[3] = 3; n[4] = 0; t = n;
00731         }
00732     }
00733     else { t = d->factors[numfac-1].where; }
00734     while ( *t ) {
00735         if ( WriteTerm(t,&lbrack,first,PRINTON,0) ) {
00736             error = 1; break;
00737         }
00738         t += *t;
00739     }
00740     AC.OutputMode = oldOutputMode;
00741     AO.OutInBuffer = 0;
00742     AO.InFbrack = oldinfbrack;
00743     AO.CurBufWrt = oldcurbufwrt;
00744     AO.CurrentDictionary = dict;
00745     if ( error ) {
00746         MLOCK(ErrorMessageLock);
00747         MesPrint("&Illegal dollar object for writing");
00748         MUNLOCK(ErrorMessageLock);
00749         M_free(AO.DollarOutBuffer,"DollarOutBuffer");
00750         AO.DollarOutBuffer = 0;
00751         AO.DollarOutSizeBuffer = 0;
00752         return(0);
00753     }
00754     return(AO.DollarOutBuffer);
00755 }
00756
00757 /*
00758 #] WriteDollarFactorToBuffer :
00759 #[ AddToDollarBuffer :
00760 */
00761
00762 void AddToDollarBuffer(UBYTE *s)
00763 {
00764     int i;
00765     UBYTE *t = s, *u, *newdob;
00766     LONG j;
00767     while ( *t ) { t++; }
00768     i = t - s;
00769     while ( i + AO.DollarInOutBuffer >= AO.DollarOutSizeBuffer ) {
00770         j = AO.DollarInOutBuffer;
00771         AO.DollarOutSizeBuffer -= 2;
00772         t = AO.DollarOutBuffer;
00773         newdob = (UBYTE *)Malloca1(AO.DollarOutSizeBuffer,"DollarOutBuffer");
00774         u = newdob;
00775         while ( --j >= 0 ) *u++ = *t++;
00776         M_free(AO.DollarOutBuffer,"DollarOutBuffer");
00777         AO.DollarOutBuffer = newdob;
00778     }
00779     t = AO.DollarOutBuffer + AO.DollarInOutBuffer-1;
00780     while ( t == AO.DollarOutBuffer && ( *s == '+' || *s == ' ' ) ) s++;
00781     i = 0;

```

```

00782     if ( AO.CurrentDictionary == 0 ) {
00783         while ( *s ) {
00784             if ( *s == ' ' ) { s++; continue; }
00785             *t++ = *s++; i++;
00786         }
00787     }
00788     else {
00789         while ( *s ) { *t++ = *s++; i++; }
00790     }
00791     *t = 0;
00792     AO.DollarInOutBuffer += i;
00793 }
00794
00795 /*
00796 #] AddToDollarBuffer :
00797 #[ TermAssign :
00798
00799 This routine is called from a piece of code in Normalize that has been
00800 commented out.
00801 */
00802
00803 void TermAssign(WORD *term)
00804 {
00805     DOLLARS d;
00806     WORD *t, *tstop, *astop, *w, *m;
00807     WORD i, newsize;
00808     for (;;) {
00809         astop = term + *term;
00810         tstop = astop - ABS(astop[-1]);
00811         t = term + 1;
00812         while ( t < tstop ) {
00813             if ( *t == AM.termfunnum && t[1] == FUNHEAD+2
00814                 && t[FUNHEAD] == -DOLLAREXPRESSION ) {
00815                 d = Dollars + t[FUNHEAD+1];
00816                 newsize = *term - FUNHEAD - 1;
00817                 if ( newsize < MINALLOC ) newsize = MINALLOC;
00818                 newsize = (newsize+7)/8*8;
00819                 if ( d->size > 2*newsize && d->size > 1000 ) {
00820                     if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollar
00821 contents");
00822                     d->size = 0;
00823                     d->where = &(AM.dollarzero);
00824                 }
00825                 if ( d->size < newsize ) {
00826                     if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollar
00827 contents");
00828                     d->size = newsize;
00829                     d->where = (WORD *)Malloc1(newsize*sizeof(WORD),"dollar contents");
00830                 }
00831                 cbuf[AM.dbufnum].rhs[t[FUNHEAD+1]] = w = d->where;
00832                 m = term;
00833                 while ( m < t ) *w++ = *m++;
00834                 m += t[1];
00835                 while ( m < tstop ) {
00836                     if ( *m == AM.termfunnum && m[1] == FUNHEAD+2
00837                         && m[FUNHEAD] == -DOLLAREXPRESSION ) { m += m[1]; }
00838                     else {
00839                         i = m[1];
00840                         while ( --i >= 0 ) *w++ = *m++;
00841                     }
00842                 }
00843                 while ( m < astop ) *w++ = *m++;
00844                 *(d->where) = w - d->where;
00845                 *w = 0;
00846                 d->type = DOLTERMS;
00847                 w = t; m = t + t[1];
00848                 while ( m < astop ) *w++ = *m++;
00849                 *term = w - term;
00850                 break;
00851             }
00852             t += t[1];
00853         }
00854     }
00855     if ( t >= tstop ) return;
00856 }
00857
00858 /*
00859 #] TermAssign :
00860 #[ PutTermInDollar :
00861
00862 We assume here that the dollar is local.
00863 */
00864
00865 int PutTermInDollar(WORD *term, WORD numdollar)
00866 {
00867     DOLLARS d = Dollars+numdollar;
00868     WORD i;

```

```

00867     if ( term == 0 || *term == 0 ) {
00868         d->type = DOLZERO;
00869         return(0);
00870     }
00871     if ( d->size < *term || d->size > 2*term[0] || d->where == 0 ) {
00872         if ( d->size > 0 && d->where ) {
00873             M_free(d->where,"dollar contents");
00874         }
00875         d->where = Malloc1((term[0]+1)*sizeof(WORD),"dollar contents");
00876         d->size = term[0]+1;
00877     }
00878     d->type = DOLTERMS;
00879     for ( i = 0; i < term[0]; i++ ) d->where[i] = term[i];
00880     d->where[i] = 0;
00881     return(0);
00882 }
00883
00884 /*
00885  #] PutTermInDollar :
00886  #[ WildDollars :
00887
00888     Note that we cannot upload wildcards into dollar variables when WITHPTHREADS.
00889 */
00890
00891 void WildDollars(PHEAD WORD *term)
00892 {
00893     GETBIDENTITY
00894     DOLLARS d;
00895     WORD *m, *t, *w, *ww, *orig = 0, *wildvalue, *wildstop;
00896     int numdollar;
00897     LONG weneed, i;
00898     #ifdef WITHPTHREADS
00899         int dtype = -1;
00900     #endif
00901     if ( term == 0 ) {
00902         m = wildvalue = AN.WildValue;
00903         wildstop = AN.WildStop;
00904     }
00905     else {
00906         ww = term + *term; ww -= ABS(ww[-1]); w = term+1;
00907         while ( w < ww && *w != SUBEXPRESSION ) w += w[1];
00908         if ( w >= ww ) return;
00909         wildstop = w + w[1];
00910         w += SUBEXPSIZE;
00911         wildvalue = m = w;
00912     }
00913     while ( m < wildstop ) {
00914         if ( *m != LOADDOLLAR ) { m += m[1]; continue; }
00915         t = m - 4;
00916         while ( *t == LOADDOLLAR || *t == FROMSET || *t == SETTONUM ) t -= 4;
00917         if ( t < wildvalue ) {
00918             MLOCK(ErrorMessageLock);
00919             MesPrint("&Serious bug in wildcard prototype. Found in WildDollars");
00920             MUNLOCK(ErrorMessageLock);
00921             Terminate(-1);
00922         }
00923         numdollar = m[2];
00924         d = Dollars + numdollar;
00925         #ifdef WITHPTHREADS
00926         {
00927             int nummodopt;
00928             dtype = -1;
00929             if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
00930                 for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00931                     if ( numdollar == ModOptdollars[nummodopt].number ) break;
00932                 }
00933                 if ( nummodopt < NumModOptdollars ) {
00934                     dtype = ModOptdollars[nummodopt].type;
00935                     if ( dtype == MODLOCAL ) {
00936                         d = ModOptdollars[nummodopt].dstruct+AT.identity;
00937                     }
00938                     else {
00939                         MLOCK(ErrorMessageLock);
00940                         MesPrint("&Illegal attempt to use $-variable %s in module %1",
00941                             DOLLARNAME(Dollars,numdollar),AC.CModule);
00942                         MUNLOCK(ErrorMessageLock);
00943                         Terminate(-1);
00944                     }
00945                 }
00946             }
00947         }
00948     #endif
00949     /*
00950         The value of this wildcard goes into our $-variable
00951         First compute the space we need.
00952     */
00953     switch ( *t ) {

```

```

00954         case SYMTONUM:
00955             weneed = 5;
00956             break;
00957         case SYMTOSYM:
00958             weneed = 9;
00959             break;
00960         case SYMTOSUB:
00961         case VECTOSUB:
00962         case INDTOSUB:
00963             orig = cbuf[AT.ebufnum].rhs[t[3]];
00964             w = orig; while ( *w ) w += *w;
00965             weneed = w - orig + 1;
00966             break;
00967         case VECTOMIN:
00968         case VECTOVEC:
00969         case INDTOIND:
00970             weneed = 8;
00971             break;
00972         case FUNTOFUN:
00973             weneed = FUNHEAD+5;
00974             break;
00975         case ARGTOARG:
00976             orig = cbuf[AT.ebufnum].rhs[t[3]];
00977             if ( *orig > 0 ) weneed = *orig+2;
00978             else {
00979                 w = orig+1; while ( *w ) { NEXTARG(w) }
00980                 weneed = w - orig + 1;
00981             }
00982             break;
00983         default:
00984             weneed = MINALLOC;
00985             break;
00986     }
00987     if ( weneed < MINALLOC ) weneed = MINALLOC;
00988     weneed = ((weneed+7)/8)*8;
00989     if ( d->size > 2*weneed && d->size > 1000 ) {
00990         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollarspace");
00991         d->where = &(AM.dollarzero);
00992         d->size = 0;
00993     }
00994     if ( d->size < weneed ) {
00995         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollarspace");
00996         d->where = (WORD *)Malloc1(weneed*sizeof(WORD),"dollarspace");
00997         d->size = weneed;
00998     }
00999 /*
01000     It is not clear what the following code does for TFORM
01001
01002     if ( dtype != MODLOCAL ) {
01003 */
01004         cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
01005         cbuf[AM.dbufnum].NumTerms[numdollar] = 1;
01006 /*
01007         cbuf[AM.dbufnum].rhs[numdollar] = d->where; */
01008         cbuf[AM.dbufnum].rhs[numdollar] = (WORD *) (1);
01009     }
01010     Now load up the value of the wildcard in compiler buffer format
01011 */
01012     w = d->where;
01013     d->type = DOLTERMS;
01014     switch ( *t ) {
01015         case SYMTONUM:
01016             d->where[0] = 4; d->where[2] = 1;
01017             if ( t[3] >= 0 ) { d->where[1] = t[3]; d->where[3] = 3; }
01018             else { d->where[1] = -t[3]; d->where[3] = -3; }
01019             if ( t[3] == 0 ) { d->type = DOLZERO; d->where[0] = 0; }
01020             else { d->type = DOLNUMBER; d->where[4] = 0; }
01021             break;
01022         case SYMTOSYM:
01023             *w++ = 8;
01024             *w++ = SYMBOL;
01025             *w++ = 4;
01026             *w++ = t[3];
01027             *w++ = 1;
01028             *w++ = 1;
01029             *w++ = 1;
01030             *w++ = 3;
01031             *w = 0;
01032             break;
01033         case SYMTOSUB:
01034         case VECTOSUB:
01035         case INDTOSUB:
01036             while ( *orig ) {
01037                 i = *orig; while ( --i >= 0 ) *w++ = *orig++;
01038             }
01039             *w = 0;
01040 /*

```

```

01041             And then we have to fix up CanCommu
01042  */
01043             break;
01044         case VECTOMIN:
01045             *w++ = 7; *w++ = INDEX; *w++ = 3; *w++ = t[3];
01046             *w++ = 1; *w++ = 1; *w++ = -3; *w = 0;
01047             break;
01048         case VECTOVEC:
01049             *w++ = 7; *w++ = INDEX; *w++ = 3; *w++ = t[3];
01050             *w++ = 1; *w++ = 1; *w++ = 3; *w = 0;
01051             break;
01052         case INDTOIND:
01053             d->type = DOLINDEX; d->index = t[3]; *w = 0;
01054             break;
01055         case FUNTOFUN:
01056             *w++ = FUNHEAD+4; *w++ = t[3]; *w++ = FUNHEAD;
01057             FILLFUN(w)
01058             *w++ = 1; *w++ = 1; *w++ = 3; *w = 0;
01059             break;
01060         case ARGTOARG:
01061             if ( *orig > 0 ) ww = orig + *orig + 1;
01062             else {
01063                 ww = orig+1; while ( *ww ) { NEXTARG(ww) }
01064             }
01065             while ( orig < ww ) *w++ = *orig++;
01066             *w = 0;
01067             d->type = DOLWILDARGS;
01068             break;
01069         default:
01070             d->type = DOLUNDEFINED;
01071             break;
01072     }
01073     m += m[1];
01074 }
01075 }
01076
01077 /*
01078  #] WildDollars :
01079  #[ DolToTensor :      with LOCK
01080  */
01081
01082 WORD DolToTensor(PHEAD WORD numdollar)
01083 {
01084     GETBIDENTITY
01085     DOLLARS d = Dollars + numdollar;
01086     WORD retval;
01087     #ifdef WITHPTHREADS
01088     int nummodopt, dtype = -1;
01089     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01090         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01091             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01092         }
01093         if ( nummodopt < NumModOptdollars ) {
01094             dtype = ModOptdollars[nummodopt].type;
01095             if ( dtype == MODLOCAL ) {
01096                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01097             }
01098             else {
01099                 LOCK(d->pthreadlockread);
01100             }
01101         }
01102     }
01103     #endif
01104     AN.ErrorInDollar = 0;
01105     if ( d->type == DOLTERMS && d->where[0] == FUNHEAD+4 &&
01106         d->where[FUNHEAD+4] == 0 && d->where[FUNHEAD+3] == 3 &&
01107         d->where[FUNHEAD+2] == 1 && d->where[FUNHEAD+1] == 1 &&
01108         d->where[1] >= FUNCTION && d->where[1] < FUNCTION+WILDOFFSET
01109         && functions[d->where[1]-FUNCTION].spec >= TENSORFUNCTION ) {
01110         retval = d->where[1];
01111     }
01112     else if ( d->type == DOLARGUMENT &&
01113         d->where[0] <= -FUNCTION && d->where[0] > -FUNCTION-WILDOFFSET
01114         && functions[-d->where[0]-FUNCTION].spec >= TENSORFUNCTION ) {
01115         retval = -d->where[0];
01116     }
01117     else if ( d->type == DOLWILDARGS && d->where[0] == 0
01118         && d->where[1] <= -FUNCTION && d->where[1] > -FUNCTION-WILDOFFSET
01119         && d->where[2] == 0
01120         && functions[-d->where[1]-FUNCTION].spec >= TENSORFUNCTION ) {
01121         retval = -d->where[1];
01122     }
01123     else if ( d->type == DOLSUBTERM &&
01124         d->where[0] >= FUNCTION && d->where[0] < FUNCTION+WILDOFFSET
01125         && functions[d->where[0]-FUNCTION].spec >= TENSORFUNCTION ) {
01126         retval = d->where[0];
01127     }

```

```

01128     else {
01129         AN.ErrorInDollar = 1;
01130         retval = 0;
01131     }
01132 #ifdef WITHPTHREADS
01133     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01134 #endif
01135     return(retval);
01136 }
01137
01138 /*
01139 #] DolToTensor :
01140 #[ DolToFunction : with LOCK
01141 */
01142
01143 WORD DolToFunction(PHEAD WORD numdollar)
01144 {
01145     GETBIDENTITY
01146     DOLLARS d = Dollars + numdollar;
01147     WORD retval;
01148 #ifdef WITHPTHREADS
01149     int nummodopt, dtype = -1;
01150     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01151         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01152             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01153         }
01154         if ( nummodopt < NumModOptdollars ) {
01155             dtype = ModOptdollars[nummodopt].type;
01156             if ( dtype == MODLOCAL ) {
01157                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01158             }
01159             else {
01160                 LOCK(d->pthreadlockread);
01161             }
01162         }
01163     }
01164 #endif
01165     AN.ErrorInDollar = 0;
01166     if ( d->type == DOLTERMS && d->where[0] == FUNHEAD+4 &&
01167         d->where[FUNHEAD+4] == 0 && d->where[FUNHEAD+3] == 3 &&
01168         d->where[FUNHEAD+2] == 1 && d->where[FUNHEAD+1] == 1 &&
01169         d->where[1] >= FUNCTION && d->where[1] < FUNCTION+WILDOFFSET ) {
01170         retval = d->where[1];
01171     }
01172     else if ( d->type == DOLARGUMENT &&
01173         d->where[0] <= -FUNCTION && d->where[0] > -FUNCTION-WILDOFFSET ) {
01174         retval = -d->where[0];
01175     }
01176     else if ( d->type == DOLWILDARGS && d->where[0] == 0
01177         && d->where[1] <= -FUNCTION && d->where[1] > -FUNCTION-WILDOFFSET
01178         && d->where[2] == 0 ) {
01179         retval = -d->where[1];
01180     }
01181     else if ( d->type == DOLSUBTERM &&
01182         d->where[0] >= FUNCTION && d->where[0] < FUNCTION+WILDOFFSET ) {
01183         retval = d->where[0];
01184     }
01185     else {
01186         AN.ErrorInDollar = 1;
01187         retval = 0;
01188     }
01189 #ifdef WITHPTHREADS
01190     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01191 #endif
01192     return(retval);
01193 }
01194
01195 /*
01196 #] DolToFunction :
01197 #[ DolToVector : with LOCK
01198 */
01199
01200 WORD DolToVector(PHEAD WORD numdollar)
01201 {
01202     GETBIDENTITY
01203     DOLLARS d = Dollars + numdollar;
01204     WORD retval;
01205 #ifdef WITHPTHREADS
01206     int nummodopt, dtype = -1;
01207     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01208         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01209             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01210         }
01211         if ( nummodopt < NumModOptdollars ) {
01212             dtype = ModOptdollars[nummodopt].type;
01213             if ( dtype == MODLOCAL ) {
01214                 d = ModOptdollars[nummodopt].dstruct+AT.identity;

```



```

01215         }
01216         else {
01217             LOCK(d->pthreadlockread);
01218         }
01219     }
01220 }
01221 #endif
01222 AN.ErrorInDollar = 0;
01223 if ( d->type == DOLINDEX && d->index < 0 ) {
01224     retval = d->index;
01225 }
01226 else if ( d->type == DOLARGUMENT && ( d->where[0] == -VECTOR
01227 || d->where[0] == -MINVECTOR ) ) {
01228     retval = d->where[1];
01229 }
01230 else if ( d->type == DOLSUBTERM && d->where[0] == INDEX
01231 && d->where[1] == 3 && d->where[2] < 0 ) {
01232     retval = d->where[2];
01233 }
01234 else if ( d->type == DOLTERMS && d->where[0] == 7 &&
01235 d->where[7] == 0 && d->where[6] == 3 &&
01236 d->where[5] == 1 && d->where[4] == 1 &&
01237 d->where[1] >= INDEX && d->where[3] < 0 ) {
01238     retval = d->where[3];
01239 }
01240 else if ( d->type == DOLWILDARGS && d->where[0] == 0
01241 && ( d->where[1] == -VECTOR || d->where[1] == -MINVECTOR )
01242 && d->where[3] == 0 ) {
01243     retval = d->where[2];
01244 }
01245 else if ( d->type == DOLWILDARGS && d->where[0] == 1
01246 && d->where[1] < 0 ) {
01247     retval = d->where[1];
01248 }
01249 else {
01250     AN.ErrorInDollar = 1;
01251     retval = 0;
01252 }
01253 #ifdef WITHPTHREADS
01254 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01255 #endif
01256 return(retval);
01257 }
01258
01259 /*
01260 #] DolToVector :
01261 #[ DolToNumber :
01262 */
01263
01264 WORD DolToNumber(PHEAD WORD numdollar)
01265 {
01266     GETBIDENTITY
01267     DOLLARS d = Dollars + numdollar;
01268 #ifdef WITHPTHREADS
01269     int nummodopt, dtype = -1;
01270     if ( AS.MultiThreaded && ( AC.mparallelfld == PARALLELFIELD ) ) {
01271         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01272             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01273         }
01274         if ( nummodopt < NumModOptdollars ) {
01275             dtype = ModOptdollars[nummodopt].type;
01276             if ( dtype == MODLOCAL ) {
01277                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01278             }
01279         }
01280     }
01281 #endif
01282 AN.ErrorInDollar = 0;
01283 if ( ( d->type == DOLTERMS || d->type == DOLNUMBER )
01284 && d->where[0] == 4 &&
01285 d->where[4] == 0 && ( d->where[3] == 3 || d->where[3] == -3 )
01286 && d->where[2] == 1 && ( d->where[1] & TOPBITONLY ) == 0 ) {
01287     if ( d->where[3] > 0 ) return(d->where[1]);
01288     else return(-d->where[1]);
01289 }
01290 else if ( d->type == DOLARGUMENT && d->where[0] == -SNUMBER ) {
01291     return(d->where[1]);
01292 }
01293 else if ( d->type == DOLARGUMENT && d->where[0] == -INDEX
01294 && d->where[1] >= 0 && d->where[1] < AM.OffsetIndex ) {
01295     return(d->where[1]);
01296 }
01297 else if ( d->type == DOLZERO ) return(0);
01298 else if ( d->type == DOLWILDARGS && d->where[0] == 0
01299 && d->where[1] == -SNUMBER && d->where[3] == 0 ) {
01300     return(d->where[2]);
01301 }

```

```

01302     else if ( d->type == DOLINDEX && d->index >= 0 && d->index < AM.OffsetIndex ) {
01303         return(d->index);
01304     }
01305     else if ( d->type == DOLWILDARGS && d->where[0] == 1
01306 && d->where[1] >= 0 && d->where[1] < AM.OffsetIndex ) {
01307         return(d->where[1]);
01308     }
01309     else if ( d->type == DOLWILDARGS && d->where[0] == 0
01310 && d->where[1] == -INDEX && d->where[3] == 0 && d->where[2] >= 0
01311 && d->where[2] < AM.OffsetIndex ) {
01312         return(d->where[2]);
01313     }
01314     AN.ErrorInDollar = 1;
01315     return(0);
01316 }
01317
01318 /*
01319 #] DolToNumber :
01320 #[ DolToSymbol :      with LOCK
01321 */
01322
01323 WORD DolToSymbol(PHEAD WORD numdollar)
01324 {
01325     GETBIDENTITY
01326     DOLLARS d = Dollars + numdollar;
01327     WORD retval;
01328 #ifdef WITHPTHREADS
01329     int nummodopt, dtype = -1;
01330     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01331         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01332             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01333         }
01334         if ( nummodopt < NumModOptdollars ) {
01335             dtype = ModOptdollars[nummodopt].type;
01336             if ( dtype == MODLOCAL ) {
01337                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01338             }
01339             else {
01340                 LOCK(d->pthreadlockread);
01341             }
01342         }
01343     }
01344 #endif
01345     AN.ErrorInDollar = 0;
01346     if ( d->type == DOLTERMS && d->where[0] == 8 &&
01347 d->where[8] == 0 && d->where[7] == 3 && d->where[6] == 1
01348 && d->where[5] == 1 && d->where[4] == 1 && d->where[1] == SYMBOL ) {
01349         retval = d->where[3];
01350     }
01351     else if ( d->type == DOLARGUMENT && d->where[0] == -SYMBOL ) {
01352         retval = d->where[1];
01353     }
01354     else if ( d->type == DOLSUBTERM && d->where[0] == SYMBOL
01355 && d->where[1] == 4 && d->where[3] == 1 ) {
01356         retval = d->where[2];
01357     }
01358     else if ( d->type == DOLWILDARGS && d->where[0] == 0
01359 && d->where[1] == -SYMBOL && d->where[3] == 0 ) {
01360         retval = d->where[2];
01361     }
01362     else {
01363         AN.ErrorInDollar = 1;
01364         retval = -1;
01365     }
01366 #ifdef WITHPTHREADS
01367     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01368 #endif
01369     return(retval);
01370 }
01371
01372 /*
01373 #] DolToSymbol :
01374 #[ DolToIndex :      with LOCK
01375 */
01376
01377 WORD DolToIndex(PHEAD WORD numdollar)
01378 {
01379     GETBIDENTITY
01380     DOLLARS d = Dollars + numdollar;
01381     WORD retval;
01382 #ifdef WITHPTHREADS
01383     int nummodopt, dtype = -1;
01384     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01385         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01386             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01387         }
01388         if ( nummodopt < NumModOptdollars ) {

```

```

01389         dtype = ModOptdollars[nummodopt].type;
01390         if ( dtype == MODLOCAL ) {
01391             d = ModOptdollars[nummodopt].dstruct+AT.identity;
01392         }
01393         else {
01394             LOCK(d->pthreadlockread);
01395         }
01396     }
01397 }
01398 #endif
01399 AN.ErrorInDollar = 0;
01400 if ( d->type == DOLTERMS && d->where[0] == 7 &&
01401     d->where[7] == 0 && d->where[6] == 3 && d->where[5] == 1
01402     && d->where[4] == 1 && d->where[1] == INDEX && d->where[3] >= 0 ) {
01403     retval = d->where[3];
01404 }
01405 else if ( d->type == DOLARGUMENT && d->where[0] == -SNUMBER
01406     && d->where[1] >= 0 && d->where[1] < AM.OffsetIndex ) {
01407     retval = d->where[1];
01408 }
01409 else if ( d->type == DOLARGUMENT && d->where[0] == -INDEX
01410     && d->where[1] >= 0 ) {
01411     retval = d->where[1];
01412 }
01413 else if ( d->type == DOLZERO ) return(0);
01414 else if ( d->type == DOLWILDARGS && d->where[0] == 0
01415     && d->where[1] == -SNUMBER && d->where[3] == 0 && d->where[2] >= 0
01416     && d->where[2] < AM.OffsetIndex ) {
01417     retval = d->where[2];
01418 }
01419 else if ( d->type == DOLINDEX && d->index >= 0 ) {
01420     retval = d->index;
01421 }
01422 else if ( d->type == DOLNUMBER && d->where[0] == 4 && d->where[2] == 1
01423     && d->where[3] == 3 && d->where[4] == 0 && d->where[1] < AM.OffsetIndex ) {
01424     retval = d->where[1];
01425 }
01426 else if ( d->type == DOLWILDARGS && d->where[0] == 1
01427     && d->where[1] >= 0 ) {
01428     retval = d->where[1];
01429 }
01430 else if ( d->type == DOLSUBTERM && d->where[0] == INDEX
01431     && d->where[1] == 3 && d->where[2] >= 0 ) {
01432     retval = d->where[2];
01433 }
01434 else if ( d->type == DOLWILDARGS && d->where[0] == 0
01435     && d->where[1] == -INDEX && d->where[3] == 0 && d->where[2] >= 0 ) {
01436     retval = d->where[2];
01437 }
01438 else {
01439     AN.ErrorInDollar = 1;
01440     retval = 0;
01441 }
01442 #ifdef WITHPTHREADS
01443 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01444 #endif
01445 return(retval);
01446 }
01447
01448 /*
01449 #] DolToIndex :
01450 #[ DolToTerms :
01451
01452 Returns a struct of type DOLLARS which contains a copy of the
01453 original dollar variable, provided it can be expressed in terms of
01454 an expression (type = DOLTERMS). Otherwise it returns zero.
01455 The dollar is expressed in terms in the buffer "where"
01456 */
01457
01458 DOLLARS DolToTerms(PHEAD WORD numdollar)
01459 {
01460     GETBIDENTITY
01461     LONG size;
01462     DOLLARS d = Dollars + numdollar, newd;
01463     WORD *t, *w, i;
01464 #ifdef WITHPTHREADS
01465     int nummodopt, dtype = -1;
01466     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01467         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01468             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01469         }
01470         if ( nummodopt < NumModOptdollars ) {
01471             dtype = ModOptdollars[nummodopt].type;
01472             if ( dtype == MODLOCAL ) {
01473                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01474             }
01475         }

```

```

01476     }
01477 #endif
01478     AN.ErrorInDollar = 0;
01479     switch ( d->type ) {
01480     case DOLARGUMENT:
01481         t = d->where;
01482         if ( t[0] < 0 ) {
01483     ShortArgument:
01484             w = AT.WorkPointer;
01485             if ( t[0] <= -FUNCTION ) {
01486                 *w++ = FUNHEAD+4; *w++ = -t[0];
01487                 *w++ = FUNHEAD; FILLFUN(w)
01488                 *w++ = 1; *w++ = 1; *w++ = 3;
01489             }
01490             else if ( t[0] == -SYMBOL ) {
01491                 *w++ = 8; *w++ = SYMBOL; *w++ = 4; *w++ = t[1];
01492                 *w++ = 1; *w++ = 1; *w++ = 1; *w++ = 3;
01493             }
01494             else if ( t[0] == -VECTOR || t[0] == -INDEX ) {
01495                 *w++ = 7; *w++ = INDEX; *w++ = 3; *w++ = t[1];
01496                 *w++ = 1; *w++ = 1; *w++ = 3;
01497             }
01498             else if ( t[0] == -MINVECTOR ) {
01499                 *w++ = 7; *w++ = INDEX; *w++ = 3; *w++ = t[1];
01500                 *w++ = 1; *w++ = 1; *w++ = -3;
01501             }
01502             else if ( t[0] == -SNUMBER ) {
01503                 *w++ = 4;
01504                 if ( t[1] < 0 ) {
01505                     *w++ = -t[1]; *w++ = 1; *w++ = -3;
01506                 }
01507                 else {
01508                     *w++ = t[1]; *w++ = 1; *w++ = 3;
01509                 }
01510             }
01511             *w = 0; size = w - AT.WorkPointer;
01512             w = AT.WorkPointer;
01513             break;
01514         }
01515         /* fall through */
01516     case DOLNUMBER:
01517     case DOLTERMS:
01518         t = d->where;
01519         while ( *t ) t += *t;
01520         size = t - d->where;
01521         w = d->where;
01522         break;
01523     case DOLSUBTERM:
01524         w = AT.WorkPointer;
01525         size = d->where[1];
01526         *w++ = size+4; t = d->where; NCOPY(w,t,size)
01527         *w++ = 1; *w++ = 1; *w++ = 3;
01528         w = AT.WorkPointer; size = d->where[1]+4;
01529         break;
01530     case DOLINDEX:
01531         w = AT.WorkPointer;
01532         *w++ = 7; *w++ = INDEX; *w++ = 3; *w++ = d->index;
01533         *w++ = 1; *w++ = 1; *w++ = 3; *w = 0;
01534         w = AT.WorkPointer; size = 7;
01535         break;
01536     case DOLWILDARGS:
01537     /*
01538         In some cases we can make a copy
01539     */
01540         t = d->where+1;
01541         if ( *t == 0 ) return(0);
01542         NEXTARG(t);
01543         if ( *t ) { /* More than one argument in here */
01544             MLOCK(ErrorMessageLock);
01545             MesPrint("Trying to convert a $ with an argument field into an expression");
01546             MUNLOCK(ErrorMessageLock);
01547             Terminate(-1);
01548         }
01549     /*
01550         Now we have a single argument
01551     */
01552         t = d->where+1;
01553         if ( *t < 0 ) goto ShortArgument;
01554         size = *t - ARGHEAD;
01555         w = t + ARGHEAD;
01556         break;
01557     case DOLUNDEFINED:
01558         MLOCK(ErrorMessageLock);
01559         MesPrint("Trying to use an undefined $ in an expression");
01560         MUNLOCK(ErrorMessageLock);
01561         Terminate(-1);
01562         /* fall through */

```

```

01563         case DOLZERO:
01564             if ( d->where ) { d->where[0] = 0; }
01565             else d->where = &(AM.dollarzero);
01566             size = 0;
01567             w = d->where;
01568             break;
01569         default:
01570             return(0);
01571     }
01572     newd = (DOLLARS)Malloc1(sizeof(struct DoLLaRS)+(size+1)*sizeof(WORD),
01573         "Copy of dollar variable");
01574     t = (WORD *) (newd+1);
01575     newd->where = t;
01576     newd->name = d->name;
01577     newd->node = d->node;
01578     newd->type = DOLTERMS;
01579     newd->size = size;
01580     newd->numdummies = d->numdummies;
01581 #ifdef WITHPTHREADS
01582     newd->pthreadlockread = dummylock;
01583     newd->pthreadlockwrite = dummylock;
01584 #endif
01585     size++;
01586     NCOPY(t,w,size);
01587     newd->nfactors = d->nfactors;
01588     if ( d->nfactors > 1 ) {
01589         newd->factors = (FACDOLLAR *)Malloc1(d->nfactors*sizeof(FACDOLLAR),"Dollar factors");
01590         for ( i = 0; i < d->nfactors; i++ ) {
01591             newd->factors[i].where = 0;
01592             newd->factors[i].size = 0;
01593             newd->factors[i].type = DOLUNDEFINED;
01594             newd->factors[i].value = d->factors[i].value;
01595         }
01596     }
01597     else { newd->factors = 0; }
01598     return(newd);
01599 }
01600
01601 /*
01602  #] DolToTerms :
01603  #[ DolToLong :
01604  */
01605
01606 LONG DolToLong(PHEAD WORD numdollar)
01607 {
01608     GETBIDENTITY
01609     DOLLARS d = Dollars + numdollar;
01610     LONG x;
01611 #ifdef WITHPTHREADS
01612     int nummodopt, dtype = -1;
01613     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01614         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01615             if ( numdollar == ModOptdollars[nummodopt].number ) break;
01616         }
01617         if ( nummodopt < NumModOptdollars ) {
01618             dtype = ModOptdollars[nummodopt].type;
01619             if ( dtype == MODLOCAL ) {
01620                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01621             }
01622         }
01623     }
01624 #endif
01625     AN.ErrorInDollar = 0;
01626     if ( ( d->type == DOLTERMS || d->type == DOLNUMBER )
01627         && d->where[0] == 4 &&
01628         d->where[4] == 0 && ( d->where[3] == 3 || d->where[3] == -3 )
01629         && d->where[2] == 1 && ( d->where[1] & TOPBITONLY ) == 0 ) {
01630         x = d->where[1];
01631         if ( d->where[3] > 0 ) return(x);
01632         else return(-x);
01633     }
01634     else if ( ( d->type == DOLTERMS || d->type == DOLNUMBER )
01635         && d->where[0] == 6 &&
01636         d->where[6] == 0 && ( d->where[5] == 5 || d->where[5] == -5 )
01637         && d->where[3] == 1 && d->where[4] == 1 && ( d->where[2] & TOPBITONLY ) == 0 ) {
01638         x = d->where[1] + ( (LONG) (d->where[2]) << BITSINWORD );
01639         if ( d->where[5] > 0 ) return(x);
01640         else return(-x);
01641     }
01642     else if ( d->type == DOLARGUMENT && d->where[0] == -SNUMBER ) {
01643         x = d->where[1];
01644         return(x);
01645     }
01646     else if ( d->type == DOLARGUMENT && d->where[0] == -INDEX
01647         && d->where[1] >= 0 && d->where[1] < AM.OffsetIndex ) {
01648         x = d->where[1];
01649         return(x);

```

```

01650     }
01651     else if ( d->type == DOLZERO ) return(0);
01652     else if ( d->type == DOLWILDARGS && d->where[0] == 0
01653     && d->where[1] == -SNUMBER && d->where[3] == 0 ) {
01654         x = d->where[2];
01655         return(x);
01656     }
01657     else if ( d->type == DOLINDEX && d->index >= 0 && d->index < AM.OffsetIndex ) {
01658         x = d->index;
01659         return(x);
01660     }
01661     else if ( d->type == DOLWILDARGS && d->where[0] == 1
01662     && d->where[1] >= 0 && d->where[1] < AM.OffsetIndex ) {
01663         x = d->where[1];
01664         return(x);
01665     }
01666     else if ( d->type == DOLWILDARGS && d->where[0] == 0
01667     && d->where[1] == -INDEX && d->where[3] == 0 && d->where[2] >= 0
01668     && d->where[2] < AM.OffsetIndex ) {
01669         x = d->where[2];
01670         return(x);
01671     }
01672     AN.ErrorInDollar = 1;
01673     return(0);
01674 }
01675
01676 /*
01677  #] DolToLong :
01678  #[ ExecInside :
01679  */
01680
01681 int ExecInside(UBYTE *s)
01682 {
01683     GETIDENTITY
01684     UBYTE *t, c;
01685     WORD *w, number;
01686     int error = 0;
01687     w = AT.WorkPointer;
01688     if ( AC.insidelevel >= MAXNEST ) {
01689         MLOCK(ErrorMessageLock);
01690         MesPrint("@Nesting of inside statements more than %d levels", (WORD)MAXNEST);
01691         MUNLOCK(ErrorMessageLock);
01692         return(-1);
01693     }
01694     AC.insidesumcheck[AC.insidelevel] = NestingChecksum();
01695     AC.insidestack[AC.insidelevel] = cbuf[AC.cbunum].Pointer
01696                                     - cbuf[AC.cbunum].Buffer + 2;
01697     AC.insidelevel++;
01698     *w++ = TYPEINSIDE;
01699     w++; w++;
01700     for(;;) { /* Look for a (comma separated) list of dollar variables */
01701         while ( *s == ',' ) s++;
01702         if ( *s == 0 ) break;
01703         if ( *s == '$' ) {
01704             s++; t = s;
01705             if ( FG.cTable[*s] != 0 ) {
01706                 MLOCK(ErrorMessageLock);
01707                 MesPrint("Illegal name for $ variable: %s", s-1);
01708                 MUNLOCK(ErrorMessageLock);
01709                 goto skipdol;
01710             }
01711             while ( FG.cTable[*s] == 0 || FG.cTable[*s] == 1 ) s++;
01712             c = *s; *s = 0;
01713             if ( ( number = GetDollar(t) ) < 0 ) {
01714                 number = AddDollar(t, 0, 0, 0);
01715             }
01716             *s = c;
01717             *w++ = number;
01718             AddPotModdollar(number);
01719         }
01720         else {
01721             MLOCK(ErrorMessageLock);
01722             MesPrint("&Illegal object in Inside statement");
01723             MUNLOCK(ErrorMessageLock);
01724             skipdol: error = 1;
01725             while ( *s && *s != ',' && s[1] != '$' ) s++;
01726             if ( *s == 0 ) break;
01727         }
01728     }
01729     AT.WorkPointer[1] = w - AT.WorkPointer;
01730     AddNtoL(AT.WorkPointer[1], AT.WorkPointer);
01731     return(error);
01732 }
01733
01734 /*
01735  #] ExecInside :
01736  #[ InsideDollar :

```

```

01737
01738     Execution part of Inside $a;
01739     We have to take the variables one by one and then
01740     convert them into proper terms and call Generator for the proper levels.
01741     The conversion copies the whole dollar into a new buffer, making us
01742     insensitive to redefinitions of $a inside the Inside.
01743     In the end we sort and redefine $a.
01744 */
01745
01746 int InsideDollar(PHEAD WORD *ll, WORD level)
01747 {
01748     GETBIDENTITY
01749     int numvar = (int)(ll[1]-3), j, error = 0;
01750     WORD numdol, *oldcterm, *oldwork = AT.WorkPointer, olddefer, *r, *m;
01751     WORD oldnumlhs, *dbuffer;
01752     DOLLARS d, newd;
01753     oldcterm = AN.cTerm; AN.cTerm = 0;
01754     oldnumlhs = AR.Cnumlhs; AR.Cnumlhs = ll[2];
01755     ll += 3;
01756     olddefer = AR.DeferFlag;
01757     AR.DeferFlag = 0;
01758     while ( --numvar >= 0 ) {
01759         numdol = *ll++;
01760         d = Dollars + numdol;
01761         {
01762 #ifdef WITHPTHREADS
01763             int nummodopt, dtype = -1;
01764             if ( AS.MultiThreaded && ( AC.mparallelfld == PARALLELFLAG ) ) {
01765                 for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01766                     if ( numdol == ModOptdollars[nummodopt].number ) break;
01767                 }
01768                 if ( nummodopt < NumModOptdollars ) {
01769                     dtype = ModOptdollars[nummodopt].type;
01770                     if ( dtype == MODLOCAL ) {
01771                         d = ModOptdollars[nummodopt].dstruct+AT.identity;
01772                     }
01773                     else {
01774                         LOCK(d->pthreadlockwrite); /*
01775                         LOCK(d->pthreadlockread);
01776                     }
01777                 }
01778             }
01779 #endif
01780             newd = DolToTerms(BHEAD numdol);
01781             if ( newd == 0 ) {
01782                 continue;
01783             }
01784             if ( newd->where[0] == 0 ) {
01785                 // DolToTerms potentially allocates memory. Free it.
01786                 // The free below is inside the while loop.
01787                 if ( newd->factors ) M_free(newd->factors, "Dollar factors");
01788                 M_free(newd, "Copy of dollar variable");
01789                 continue;
01790             }
01791             r = newd->where;
01792             NewSort(BHEAD0);
01793             while ( *r ) { /* Sum over the terms */
01794                 m = AT.WorkPointer;
01795                 j = *r;
01796                 while ( --j >= 0 ) *m++ = *r++;
01797                 AT.WorkPointer = m;
01798             /*
01799             What to do with dummy indices?
01800             */
01801             if ( Generator(BHEAD oldwork, level) ) {
01802                 LowerSortLevel();
01803                 error = -1; goto idcall;
01804             }
01805             AT.WorkPointer = oldwork;
01806         }
01807         AN.tryterm = 0; /* for now */
01808         if ( EndSort(BHEAD (WORD *)((void *)(&dbuffer)), 2) < 0 ) { error = 1; break; }
01809         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where, "old buffer of dollar");
01810         d->where = dbuffer;
01811         if ( dbuffer == 0 || *dbuffer == 0 ) {
01812             d->type = DOLZERO;
01813             if ( dbuffer ) M_free(dbuffer, "buffer of dollar");
01814             d->where = &(AM.dollarzero); d->size = 0;
01815         }
01816         else {
01817             d->type = DOLTERMS;
01818             r = d->where; while ( *r ) r += *r;
01819             d->size = (r-d->where)+1;
01820         }
01821         /* cbuf[AM.dbufnum].rhs[numdol] = d->where; */
01822         cbuf[AM.dbufnum].rhs[numdol] = (WORD *)1;
01823         /*

```

```

01824         Now we have a little cleaning up to do
01825     */
01826 #ifdef WITHPTHREADS
01827     if ( dtype > 0 && dtype != MODLOCAL ) {
01828     /*         UNLOCK(d->pthreadlockwrite); */
01829         UNLOCK(d->pthreadlockread);
01830     }
01831 #endif
01832     if ( newd->factors ) M_free(newd->factors,"Dollar factors");
01833     M_free(newd,"Copy of dollar variable");
01834 }
01835 }
01836 idcall::
01837     AR.Cnumlhs = oldnumlhs;
01838     AR.DeferFlag = olddefer;
01839     AN.cTerm = oldcTerm;
01840     AT.WorkPointer = oldwork;
01841     return(error);
01842 }
01843
01844 /*
01845     #] InsideDollar :
01846     #[ ExchangeDollars :
01847 */
01848
01849 void ExchangeDollars(int num1, int num2)
01850 {
01851     DOLLARS d1, d2;
01852     WORD node1, node2;
01853     LONG nam;
01854     d1 = Dollars + num1; node1 = d1->node;
01855     d2 = Dollars + num2; node2 = d2->node;
01856     nam = d1->name; d1->name = d2->name; d2->name = nam;
01857     d1->node = node2; d2->node = node1;
01858     AC.dollarnames->namenode[node1].number = num2;
01859     AC.dollarnames->namenode[node2].number = num1;
01860 }
01861
01862 /*
01863     #] ExchangeDollars :
01864     #[ TermsInDollar :
01865 */
01866
01867 LONG TermsInDollar(WORD num)
01868 {
01869     GETIDENTITY
01870     DOLLARS d = Dollars + num;
01871     WORD *t;
01872     LONG n;
01873 #ifdef WITHPTHREADS
01874     int nummodopt, dtype = -1;
01875     if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
01876         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01877             if ( num == ModOptdollars[nummodopt].number ) break;
01878         }
01879         if ( nummodopt < NumModOptdollars ) {
01880             dtype = ModOptdollars[nummodopt].type;
01881             if ( dtype == MODLOCAL ) {
01882                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01883             }
01884             else {
01885                 LOCK(d->pthreadlockread);
01886             }
01887         }
01888     }
01889 #endif
01890     if ( d->type == DOLTERMS ) {
01891         n = 0;
01892         t = d->where;
01893         while ( *t ) { t += *t; n++; }
01894     }
01895     else if ( d->type == DOLWILDARGS ) {
01896         n = 0;
01897         if ( d->where[0] == 0 ) {
01898             t = d->where+1;
01899             while ( *t != 0 ) { NEXTARG(t); n++; }
01900         }
01901         else if ( d->where[0] == 1 ) n = 1;
01902     }
01903     else if ( d->type == DOLZERO ) n = 0;
01904     else n = 1;
01905 #ifdef WITHPTHREADS
01906     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01907 #endif
01908     return(n);
01909 }
01910

```



```

01911 /*
01912     #] TermsInDollar :
01913     #[ SizeOfDollar :
01914 */
01915
01916 LONG SizeOfDollar(WORD num)
01917 {
01918     GETIDENTITY
01919     DOLLARS d = Dollars + num;
01920     WORD *t;
01921     LONG n;
01922 #ifndef WITHPTHREADS
01923     int nummodopt, dtype = -1;
01924     if ( AS.MultiThreaded && ( AC.mparallelfld == PARALLELFLAG ) ) {
01925         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01926             if ( num == ModOptdollars[nummodopt].number ) break;
01927         }
01928         if ( nummodopt < NumModOptdollars ) {
01929             dtype = ModOptdollars[nummodopt].type;
01930             if ( dtype == MODLOCAL ) {
01931                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01932             }
01933             else {
01934                 LOCK(d->pthreadlockread);
01935             }
01936         }
01937     }
01938 #endif
01939     if ( d->type == DOLTERMS ) {
01940         t = d->where;
01941         while ( *t ) t += *t;
01942         t++;
01943         n = (LONG)(t - d->where);
01944     }
01945     else if ( d->type == DOLWILDARGS ) {
01946         n = 0;
01947         if ( d->where[0] == 0 ) {
01948             t = d->where+1;
01949             while ( *t != 0 ) { NEXTARG(t); n++; }
01950             t++;
01951             n = (LONG)(t - d->where);
01952         }
01953         else if ( d->where[0] == 1 ) n = 1;
01954     }
01955     else if ( d->type == DOLZERO ) n = 0;
01956     else n = 1;
01957 #ifdef WITHPTHREADS
01958     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01959 #endif
01960     return(n);
01961 }
01962
01963 /*
01964     #] SizeOfDollar :
01965     #[ PreIfDollarEval :
01966
01967     Routine is invoked in #if etc after $( is encountered.
01968     $(expr1 operator expr2) makes compares between expressions,
01969     $(expr1 operator _keyword) makes compares between expressions,
01970     interpreted as expressions. We are here mainly looking at $variables.
01971     First we look for the operator:
01972         >, <, ==, >=, <=, != : < means that it comes before.
01973     _keywords can be:
01974         _set(setname)    (does the expr belong to the set (only with == or !=))
01975         _productof(expr)
01976 */
01977
01978 UBYTE *PreIfDollarEval(UBYTE *s, int *value)
01979 {
01980     GETIDENTITY
01981     UBYTE *s1,*s2,*s3,*s4,*s5,*t,c,c1,c2,c3;
01982     int oprtr, type;
01983     WORD *buf1 = 0, *buf2 = 0, numset, *oldwork = AT.WorkPointer;
01984     EXCHINOUT
01985 /*
01986     Find the three composing objects (epxpression, operator, expression or keyw
01987 */
01988     while ( *s == ' ' || *s == '\t' || *s == '\n' || *s == '\r' ) s++;
01989     s1 = t = s;
01990     while ( *t != '=' && *t != '!' && *t != '>' && *t != '<' ) {
01991         if ( *t == '[' ) { SKIPBRA1(t) }
01992         else if ( *t == '{' ) { SKIPBRA2(t) }
01993         else if ( *t == '(' ) { SKIPBRA3(t) }
01994         else if ( *t == ']' || *t == '}' || *t == ')' ) {
01995             MLOCK(ErrorMessageLock);
01996             MesPrint("@Improper bracketting in #if");
01997             MUNLOCK(ErrorMessageLock);

```

```

01998         goto onerror;
01999     }
02000     t++;
02001 }
02002 s2 = t;
02003 while ( *t == '=' || *t == '!' || *t == '>' || *t == '<' ) t++;
02004 s3 = t;
02005 while ( *t && *t != ')' ) {
02006     if ( *t == '[' ) { SKIPBRA1(t) }
02007     else if ( *t == '{' ) { SKIPBRA2(t) }
02008     else if ( *t == '(' ) { SKIPBRA3(t) }
02009     else if ( *t == ']' || *t == '}' ) {
02010         MLOCK(ErrorMessageLock);
02011         MesPrint("@Improper brackets in #if");
02012         MUNLOCK(ErrorMessageLock);
02013         goto onerror;
02014     }
02015     t++;
02016 }
02017 if ( *t == 0 ) {
02018     MLOCK(ErrorMessageLock);
02019     MesPrint("@Missing ) to match $( in #if");
02020     MUNLOCK(ErrorMessageLock);
02021     goto onerror;
02022 }
02023 s4 = t; c2 = *s4; *s4 = 0;
02024 if ( s2+2 < s3 || s2 == s3 ) {
02025     IllOp;;
02026     MLOCK(ErrorMessageLock);
02027     MesPrint("@Illegal operator in $( option of #if");
02028     MUNLOCK(ErrorMessageLock);
02029     goto onerror;
02030 }
02031 if ( s2+1 == s3 ) {
02032     if ( *s2 == '=' ) oprtr = EQUAL;
02033     else if ( *s2 == '>' ) oprtr = GREATER;
02034     else if ( *s2 == '<' ) oprtr = LESS;
02035     else goto IllOp;
02036 }
02037 else if ( *s2 == '!' && s2[1] == '=' ) oprtr = NOTEQUAL;
02038 else if ( *s2 == '=' && s2[1] == '=' ) oprtr = EQUAL;
02039 else if ( *s2 == '<' && s2[1] == '=' ) oprtr = LESSEQUAL;
02040 else if ( *s2 == '>' && s2[1] == '=' ) oprtr = GREATEREQUAL;
02041 else goto IllOp;
02042 c1 = *s2; *s2 = 0;
02043 /*
02044     The two expressions are now zero terminated
02045     Look for the special keywords
02046 */
02047 while ( *s3 == ' ' || *s3 == '\t' || *s3 == '\n' || *s3 == '\r' ) s3++;
02048 t = s3;
02049 while ( chartype[*t] == 0 ) t++;
02050 if ( *t == '_' ) {
02051     t++; c = *t; *t = 0;
02052     if ( StrICmp(s3,(UBYTE *)"set_") == 0 ) {
02053         if ( oprtr != EQUAL && oprtr != NOTEQUAL ) {
02054             ImpOp;;
02055             MLOCK(ErrorMessageLock);
02056             MesPrint("@Improper operator for special keyword in $( ) option");
02057             MUNLOCK(ErrorMessageLock);
02058             goto onerror;
02059         }
02060         type = 1;
02061     }
02062     else if ( StrICmp(s3,(UBYTE *)"multipleof_") == 0 ) {
02063         if ( oprtr != EQUAL && oprtr != NOTEQUAL ) goto ImpOp;
02064         type = 2;
02065     }
02066     /*
02067     else if ( StrICmp(s3,(UBYTE *)"productof_") == 0 ) {
02068         if ( oprtr != EQUAL && oprtr != NOTEQUAL ) goto ImpOp;
02069         type = 3;
02070     }
02071 */
02072     else type = 0;
02073 }
02074 else { type = 0; c = *t; }
02075 if ( type > 0 ) {
02076     *t++ = c; s3 = t; s5 = s4-1;
02077     while ( *s5 != ')' ) {
02078         if ( *s5 == ' ' || *s5 == '\t' || *s5 == '\n' || *s5 == '\r' ) s5--;
02079         else {
02080             MLOCK(ErrorMessageLock);
02081             MesPrint("@Improper use of special keyword in $( ) option");
02082             MUNLOCK(ErrorMessageLock);
02083             goto onerror;
02084         }

```

```

02085     }
02086     c3 = *s5; *s5 = 0;
02087 }
02088 else { c3 = c2; s5 = s4; }
02089 /*
02090 Expand the first expression.
02091 */
02092 if ( ( buf1 = TranslateExpression(s1) ) == 0 ) {
02093     AT.WorkPointer = oldwork;
02094     goto onerror;
02095 }
02096 if ( type == 1 ) { /* determine the set */
02097     if ( *s3 == '{' ) {
02098         t = s3+1;
02099         SKIPBRA2(s3)
02100         numset = DoTempSet(t,s3);
02101         s3++;
02102         if ( numset < 0 ) {
02103 noset::
02104             MLOCK(ErrorMessageLock);
02105             MesPrint("@Argument of set_ is not a valid set");
02106             MUNLOCK(ErrorMessageLock);
02107             goto onerror;
02108         }
02109     }
02110     else {
02111         t = s3;
02112         while ( FG.cTable[*s3] == 0 || FG.cTable[*s3] == 1
02113             || *s3 == '_' ) s3++;
02114         c = *s3; *s3 = 0;
02115         if ( GetName(AC.varnames,t,&numset,NOAUTO) != CSET ) {
02116             *s3 = c; goto noset;
02117         }
02118         *s3 = c;
02119     }
02120     while ( *s3 == ' ' || *s3 == '\t' || *s3 == '\n' || *s3 == '\r' ) s3++;
02121     if ( s3 != s5 ) goto noset;
02122     *value = IsSetMember(buf1,numset);
02123     if ( oprtr == NOTEQUAL ) *value ^= 1;
02124 }
02125 else {
02126     if ( ( buf2 = TranslateExpression(s3) ) == 0 ) goto onerror;
02127 }
02128 if ( type == 0 ) {
02129     *value = TwoExprCompare(buf1,buf2,oprtr);
02130 }
02131 else if ( type == 2 ) {
02132     *value = IsMultipleOf(buf1,buf2);
02133     if ( oprtr == NOTEQUAL ) *value ^= 1;
02134 }
02135 /*
02136 else if ( type == 3 ) {
02137     *value = IsProductOf(buf1,buf2);
02138     if ( oprtr == NOTEQUAL ) *value ^= 1;
02139 }
02140 */
02141 if ( buf1 ) M_free(buf1,"Buffer in $()");
02142 if ( buf2 ) M_free(buf2,"Buffer in $()");
02143 *s5 = c3; *s4++ = c2; *s2 = c1;
02144 AT.WorkPointer = oldwork;
02145 BACKINOUT
02146 return(s4);
02147 onerror:
02148 if ( buf1 ) M_free(buf1,"Buffer in $()");
02149 if ( buf2 ) M_free(buf2,"Buffer in $()");
02150 AT.WorkPointer = oldwork;
02151 BACKINOUT
02152 return(0);
02153 }
02154
02155 /*
02156 #] PreIfDollarEval :
02157 #[ TranslateExpression :
02158 */
02159
02160 WORD *TranslateExpression(UBYTE *s)
02161 {
02162     GETIDENTITY
02163     CBUF *C = cbuf+AC.cbunum;
02164     WORD oldnumrhs = C->numrhs;
02165     LONG oldcpointer = C->Pointer - C->Buffer;
02166     WORD *w = AT.WorkPointer;
02167     WORD retcode, oldEside;
02168     WORD *outbuffer;
02169     *w++ = SUBEXPSize + 4;
02170     AC.ProtoType = w;
02171     *w++ = SUBEXPRESSION;

```

```

02172     *w++ = SUBEXPSIZE;
02173     *w++ = C->numrhs+1;
02174     *w++ = 1;
02175     *w++ = AC.cbufnum;
02176     FILLSUB(w)
02177     *w++ = 1; *w++ = 1; *w++ = 3; *w++ = 0;
02178     AT.WorkPointer = w;
02179     if ( ( retcode = CompileAlgebra(s,RHSIDE,AC.ProtoType) ) < 0 ) {
02180         MLOCK(ErrorMessageLock);
02181         MesPrint("@Error translating first expression in $( ) option");
02182         MUNLOCK(ErrorMessageLock);
02183         return(0);
02184     }
02185     else { AC.ProtoType[2] = retcode; }
02186 /*
02187     Evaluate this expression
02188 */
02189     if ( NewSort(BHEAD0) || NewSort(BHEAD0) ) { return(0); }
02190     AN.RepPoint = AT.RepCount + 1;
02191     oldEside = AR.Eside; AR.Eside = RHSIDE;
02192     AR.Cnumlhs = C->numlhs;
02193     if ( Generator(BHEAD AC.ProtoType-1,C->numlhs) ) {
02194         AR.Eside = oldEside;
02195         LowerSortLevel(); LowerSortLevel(); return(0);
02196     }
02197     AR.Eside = oldEside;
02198     AT.WorkPointer = w;
02199     AN.tryterm = 0; /* for now */
02200     if ( EndSort(BHEAD (WORD *)((void *)(&outbuffer)),2) < 0 ) { LowerSortLevel(); return(0); }
02201     LowerSortLevel();
02202     C->Pointer = C->Buffer + oldcpointer;
02203     C->numrhs = oldnumrhs;
02204     AT.WorkPointer = AC.ProtoType - 1;
02205     return(outbuffer);
02206 }
02207
02208 /*
02209     #] TranslateExpression :
02210     #[ IsSetMember :
02211
02212     Checks whether the expression in the buffer can be seen as an element
02213     of the given set.
02214     For the special sets: if more than one term: no match!!!
02215 */
02216
02217 int IsSetMember(WORD *buffer, WORD numset)
02218 {
02219     WORD *t = buffer, *tt, num, csize, num1;
02220     WORD bufterm[4];
02221     int i, j, type;
02222     if ( numset < AM.NumFixedSets ) {
02223         if ( t[*t] != 0 ) return(0); /* More than one term */
02224         if ( *t == 0 ) {
02225             if ( numset == POS0_ || numset == NEG0_ || numset == EVEN_
02226                 || numset == Z_ || numset == Q_ ) return(1);
02227             else return(0);
02228         }
02229         if ( numset == SYMBOL_ ) {
02230             if ( *t == 8 && t[1] == SYMBOL && t[7] == 3 && t[6] == 1
02231                 && t[5] == 1 && t[4] == 1 ) return(1);
02232             else return(0);
02233         }
02234         if ( numset == INDEX_ ) {
02235             if ( *t == 7 && t[1] == INDEX && t[6] == 3 && t[5] == 1
02236                 && t[4] == 1 && t[3] > 0 ) return(1);
02237             if ( *t == 4 && t[3] == 3 && t[2] == 1 && t[1] < AM.OffsetIndex )
02238                 return(1);
02239             return(0);
02240         }
02241         if ( numset == FIXED_ ) {
02242             if ( *t == 7 && t[1] == INDEX && t[6] == 3 && t[5] == 1
02243                 && t[4] == 1 && t[3] > 0 && t[3] < AM.OffsetIndex ) return(1);
02244             if ( *t == 4 && t[3] == 3 && t[2] == 1 && t[1] < AM.OffsetIndex )
02245                 return(1);
02246             return(0);
02247         }
02248         if ( numset == DUMMYINDEX_ ) {
02249             if ( *t == 7 && t[1] == INDEX && t[6] == 3 && t[5] == 1
02250                 && t[4] == 1 && t[3] >= AM.IndDum && t[3] < AM.IndDum+MAXDUMMIES ) return(1);
02251             if ( *t == 4 && t[3] == 3 && t[2] == 1
02252                 && t[1] >= AM.IndDum && t[1] < AM.IndDum+MAXDUMMIES ) return(1);
02253             return(0);
02254         }
02255         if ( numset == VECTOR_ ) {
02256             if ( *t == 7 && t[1] == INDEX && t[6] == 3 && t[5] == 1
02257                 && t[4] == 1 && t[3] < (AM.OffsetVector+WILDOFFSET) && t[3] >= AM.OffsetVector )
02258                 return(1);

```

```

02258         return(0);
02259     }
02260     tt = t + *t - 1;
02261     if ( ABS(tt[0]) != *t-1 ) return(0);
02262     if ( numset == Q_ ) return(1);
02263     if ( numset == POS_ || numset == POS0_ ) return(tt[0]>0);
02264     else if ( numset == NEG_ || numset == NEG0_ ) return(tt[0]<0);
02265     i = (ABS(tt[0])-1)/2;
02266     tt -= i;
02267     if ( tt[0] != 1 ) return(0);
02268     for ( j = 1; j < i; j++ ) { if ( tt[j] != 0 ) return(0); }
02269     if ( numset == Z_ ) return(1);
02270     if ( numset == ODD_ ) return(t[1]&1);
02271     if ( numset == EVEN_ ) return(1-(t[1]&1));
02272     return(0);
02273 }
02274 if ( t[*t] != 0 ) return(0); /* More than one term */
02275 type = Sets[numset].type;
02276 switch ( type ) {
02277     case CSYMBOL:
02278         if ( t[0] == 8 && t[1] == SYMBOL && t[7] == 3 && t[6] == 1
02279             && t[5] == 1 && t[4] == 1 ) {
02280             num = t[3];
02281         }
02282         else if ( t[0] == 4 && t[2] == 1 && t[1] <= MAXPOWER ) {
02283             num = t[1];
02284             if ( t[3] < 0 ) num = -num;
02285             num += 2*MAXPOWER;
02286         }
02287         else return(0);
02288         break;
02289     case CVECTOR:
02290         if ( t[0] == 7 && t[1] == INDEX && t[6] == 3 && t[5] == 1
02291             && t[4] == 1 && t[3] < 0 ) {
02292             num = t[3];
02293         }
02294         else return(0);
02295         break;
02296     case CINDEX:
02297         if ( t[0] == 7 && t[1] == INDEX && t[6] == 3 && t[5] == 1
02298             && t[4] == 1 && t[3] > 0 ) {
02299             num = t[3];
02300         }
02301         else if ( t[0] == 4 && t[3] == 3 && t[2] == 1 && t[1] < AM.OffsetIndex ) {
02302             num = t[1];
02303         }
02304         else return(0);
02305         break;
02306     case CFUNCTION:
02307         if ( t[0] == 4+FUNHEAD && t[3+FUNHEAD] == 3 && t[2+FUNHEAD] == 1
02308             && t[1+FUNHEAD] == 1 && t[1] >= FUNCTION ) {
02309             num = t[1];
02310         }
02311         else return(0);
02312         break;
02313     case CNUMBER:
02314         if ( t[0] == 4 && t[2] == 1 && t[1] <= AM.OffsetIndex && t[3] == 3 ) {
02315             num = t[1];
02316         }
02317         else return(0);
02318         break;
02319     case CRANGE:
02320         csize = t[t[0]-1];
02321         csize = ABS(csize);
02322         if ( csize != t[0]-1 ) return(0);
02323         if ( Sets[numset].first < 3*MAXPOWER ) {
02324             num1 = num = Sets[numset].first;
02325             if ( num >= MAXPOWER ) num -= 2*MAXPOWER;
02326             if ( num == 0 ) {
02327                 if ( num1 < MAXPOWER ) {
02328                     if ( t[t[0]-1] >= 0 ) return(0);
02329                 }
02330                 else if ( t[t[0]-1] > 0 ) return(0);
02331             }
02332             else {
02333                 bufterm[0] = 4; bufterm[1] = ABS(num);
02334                 bufterm[2] = 1;
02335                 if ( num < 0 ) bufterm[3] = -3;
02336                 else bufterm[3] = 3;
02337                 num = CompCoef(t,bufterm);
02338                 if ( num1 < MAXPOWER ) {
02339                     if ( num >= 0 ) return(0);
02340                 }
02341                 else if ( num > 0 ) return(0);
02342             }
02343         }
02344         if ( Sets[numset].last > -3*MAXPOWER ) {

```

```

02345         num1 = num = Sets[numset].last;
02346         if ( num <= -MAXPOWER ) num += 2*MAXPOWER;
02347         if ( num == 0 ) {
02348             if ( num1 > -MAXPOWER ) {
02349                 if ( t[t[0]-1] <= 0 ) return(0);
02350             }
02351             else if ( t[t[0]-1] < 0 ) return(0);
02352         }
02353         else {
02354             bufterm[0] = 4; bufterm[1] = ABS(num);
02355             bufterm[2] = 1;
02356             if ( num < 0 ) bufterm[3] = -3;
02357             else bufterm[3] = 3;
02358             num = CompCoeef(t,bufterm);
02359             if ( num1 > -MAXPOWER ) {
02360                 if ( num <= 0 ) return(0);
02361             }
02362             else if ( num < 0 ) return(0);
02363         }
02364     }
02365     return(1);
02366     break;
02367     default: return(0);
02368 }
02369 t = SetElements + Sets[numset].first;
02370 tt = SetElements + Sets[numset].last;
02371 do {
02372     if ( num == *t ) return(1);
02373     t++;
02374 } while ( t < tt );
02375 return(0);
02376 }
02377
02378 /*
02379 #] IsSetMember :
02380 #[ IsProductOf :
02381
02382 Checks whether the expression in buf1 is a single term multiple of
02383 the expression in buf2.
02384
02385 int IsProductOf(WORD *buf1, WORD *buf2)
02386 {
02387     return(0);
02388 }
02389
02390
02391 #] IsProductOf :
02392 #[ IsMultipleOf :
02393
02394 Checks whether the expression in buf1 is a numerical multiple of
02395 the expression in buf2.
02396 */
02397
02398 int IsMultipleOf(WORD *buf1, WORD *buf2)
02399 {
02400     GETIDENTITY
02401     LONG num1, num2;
02402     WORD *t1, *t2, *m1, *m2, *r1, *r2, nc1, nc2, ni1, ni2;
02403     UWORD *IfScrat1, *IfScrat2;
02404     int i, j;
02405     if ( *buf1 == 0 && *buf2 == 0 ) return(1);
02406     /*
02407     First count terms
02408     */
02409     t1 = buf1; t2 = buf2; num1 = 0; num2 = 0;
02410     while ( *t1 ) { t1 += *t1; num1++; }
02411     while ( *t2 ) { t2 += *t2; num2++; }
02412     if ( num1 != num2 ) return(0);
02413     /*
02414     Test similarity of terms. Difference up to a number.
02415     */
02416     t1 = buf1; t2 = buf2;
02417     while ( *t1 ) {
02418         m1 = t1+1; m2 = t2+1; t1 += *t1; t2 += *t2;
02419         r1 = t1 - ABS(t1[-1]); r2 = t2 - ABS(t2[-1]);
02420         if ( r1-m1 != r2-m2 ) return(0);
02421         while ( m1 < r1 ) {
02422             if ( *m1 != *m2 ) return(0);
02423             m1++; m2++;
02424         }
02425     }
02426     /*
02427     Now we have to test the constant factor
02428     */
02429     IfScrat1 = (UWORD *) (TermMalloc("IsMultipleOf")); IfScrat2 = (UWORD
*) (TermMalloc("IsMultipleOf"));
02430     t1 = buf1; t2 = buf2;

```

```

02431     t1 += *t1; t2 += *t2;
02432     if ( *t1 == 0 && *t2 == 0 ) return(1);
02433     r1 = t1 - ABS(t1[-1]); r2 = t2 - ABS(t2[-1]);
02434     nc1 = REDLENG(t1[-1]); nc2 = REDLENG(t2[-1]);
02435     if ( DivRat(BHEAD (UWORD *)r1,nc1,(UWORD *)r2,nc2,IfScrat1,&ni1) ) {
02436         MLOCK(ErrorMessageLock);
02437         MesPrint("@Called from MultipleOf in $( )");
02438         MUNLOCK(ErrorMessageLock);
02439         TermFree(IfScrat1,"IsMultipleOf"); TermFree(IfScrat2,"IsMultipleOf");
02440         Terminate(-1);
02441     }
02442     while ( *t1 ) {
02443         t1 += *t1; t2 += *t2;
02444         r1 = t1 - ABS(t1[-1]); r2 = t2 - ABS(t2[-1]);
02445         nc1 = REDLENG(t1[-1]); nc2 = REDLENG(t2[-1]);
02446         if ( DivRat(BHEAD (UWORD *)r1,nc1,(UWORD *)r2,nc2,IfScrat2,&ni2) ) {
02447             MLOCK(ErrorMessageLock);
02448             MesPrint("@Called from MultipleOf in $( )");
02449             MUNLOCK(ErrorMessageLock);
02450             TermFree(IfScrat1,"IsMultipleOf"); TermFree(IfScrat2,"IsMultipleOf");
02451             Terminate(-1);
02452         }
02453         if ( ni1 != ni2 ) return(0);
02454         i = 2*ABS(ni1);
02455         for ( j = 0; j < i; j++ ) {
02456             if ( IfScrat1[j] != IfScrat2[j] ) {
02457                 TermFree(IfScrat1,"IsMultipleOf"); TermFree(IfScrat2,"IsMultipleOf");
02458                 return(0);
02459             }
02460         }
02461     }
02462     TermFree(IfScrat1,"IsMultipleOf"); TermFree(IfScrat2,"IsMultipleOf");
02463     return(1);
02464 }
02465
02466 /*
02467 #] IsMultipleOf :
02468 #[ TwoExprCompare :
02469
02470 Compares the expressions in buf1 and buf2 according to oprtr
02471 */
02472
02473 int TwoExprCompare(WORD *buf1, WORD *buf2, int oprtr)
02474 {
02475     GETIDENTITY
02476     WORD *t1, *t2, cond;
02477     t1 = buf1; t2 = buf2;
02478     while ( *t1 && *t2 ) {
02479         cond = CompareTerms(BHEAD t1,t2,1);
02480         if ( cond != 0 ) {
02481             if ( cond > 0 ) { /* t1 comes first */
02482                 switch ( oprtr ) { /* t1 is less */
02483                     case EQUAL: return(0);
02484                     case NOTEQUAL: return(1);
02485                     case GREATEREQUAL: return(0);
02486                     case GREATER: return(0);
02487                     case LESS: return(1);
02488                     case LESSEQUAL: return(1);
02489                 }
02490             }
02491             else {
02492                 switch ( oprtr ) {
02493                     case EQUAL: return(0);
02494                     case NOTEQUAL: return(1);
02495                     case GREATEREQUAL: return(1);
02496                     case GREATER: return(1);
02497                     case LESS: return(0);
02498                     case LESSEQUAL: return(0);
02499                 }
02500             }
02501         }
02502         t1 += *t1; t2 += *t2;
02503     }
02504     if ( *t1 == *t2 ) { /* They are equal */
02505         switch ( oprtr ) {
02506             case EQUAL: return(1);
02507             case NOTEQUAL: return(0);
02508             case GREATEREQUAL: return(1);
02509             case GREATER: return(0);
02510             case LESS: return(0);
02511             case LESSEQUAL: return(1);
02512         }
02513     }
02514     else if ( *t1 ) { /* t1 is greater */
02515         switch ( oprtr ) {
02516             case EQUAL: return(0);
02517             case NOTEQUAL: return(1);

```

```

02518         case GREATEREQUAL: return(1);
02519         case GREATER: return(1);
02520         case LESS: return(0);
02521         case LESSEQUAL: return(0);
02522     }
02523 }
02524 else {
02525     switch ( oprtr ) { /* t1 is less */
02526         case EQUAL: return(0);
02527         case NOTEQUAL: return(1);
02528         case GREATEREQUAL: return(0);
02529         case GREATER: return(0);
02530         case LESS: return(1);
02531         case LESSEQUAL: return(1);
02532     }
02533 }
02534 MLOCK(ErrorMessageLock);
02535 MesPrint("@Internal problems with operator in $( )");
02536 MUNLOCK(ErrorMessageLock);
02537 Terminate(-1);
02538 return(0);
02539 }
02540
02541 /*
02542  #] TwoExprCompare :
02543  #[ DollarRaiseLow :
02544
02545  Raises or lowers the numerical value of a dollar variable
02546  Not to be used in parallel.
02547 */
02548
02549 static UWORD *dscrat = 0;
02550 static WORD ndscrat;
02551
02552 int DollarRaiseLow(UBYTE *name, LONG value)
02553 {
02554     GETIDENTITY
02555     int num;
02556     DOLLARS d;
02557     int sgn = 1;
02558     WORD lnum[4], nnum, *t1, *t2, i;
02559     UBYTE *s, c;
02560     s = name; while ( *s ) s++;
02561     if ( s[-1] == '-' && s[-2] == '-' && s > name+2 ) s -= 2;
02562     else if ( s[-1] == '+' && s[-2] == '+' && s > name+2 ) s -= 2;
02563     c = *s; *s = 0;
02564     num = GetDollar(name);
02565     *s = c;
02566     d = Dollars + num;
02567     if ( value < 0 ) { value = -value; sgn = -1; }
02568     if ( d->type == DOLZERO ) {
02569         if ( d->where ) M_free(d->where,"DollarRaiseLow");
02570         d->size = MINALLOCS;
02571         d->where = (WORD *)Malloc1(d->size*sizeof(WORD),"DollarRaiseLow");
02572         if ( ( value & AWORDMASK ) != 0 ) {
02573             d->where[0] = 6; d->where[1] = value » BITSINWORD;
02574             d->where[2] = (WORD)value; d->where[3] = 1; d->where[4] = 0;
02575             d->where[5] = 5*sgn; d->where[6] = 0;
02576             d->type = DOLTERMS;
02577         }
02578     }
02579     else {
02580         d->where[0] = 4; d->where[1] = (WORD)value; d->where[2] = 1;
02581         d->where[3] = 3*sgn; d->where[4] = 0;
02582         d->type = DOLNUMBER;
02583     }
02584     else if ( d->type == DOLNUMBER || ( d->type == DOLTERMS
02585     && d->where[d->where[0]] == 0
02586     && d->where[0] == ABS(d->where[d->where[0]-1])+1 ) ) {
02587         if ( ( value & AWORDMASK ) != 0 ) {
02588             lnum[0] = value » BITSINWORD;
02589             lnum[1] = (WORD)value; lnum[2] = 1; lnum[3] = 0;
02590             nnum = 2*sgn;
02591         }
02592         else {
02593             lnum[0] = (WORD)value; lnum[1] = 1; nnum = sgn;
02594         }
02595         i = d->where[d->where[0]-1];
02596         i = REDLENG(i);
02597         if ( dscrat == 0 ) {
02598             dscrat = (UWORD *)Malloc1((AM.MaxTal+2)*sizeof(UWORD),"DollarRaiseLow");
02599         }
02600         if ( AddRat(BHEAD (UWORD *) (d->where+1), i,
02601         (UWORD *)lnum, nnum, dscrat, &ndscrat) ) {
02602             MLOCK(ErrorMessageLock);
02603             MesCall("DollarRaiseLow");
02604             MUNLOCK(ErrorMessageLock);

```



```

02605         Terminate(-1);
02606     }
02607     ndscrat = INCLENG(ndscrat);
02608     i = ABS(ndscrat);
02609     if ( i == 0 ) {
02610         M_free(d->where,"DollarRaiseLow");
02611         d->where = 0;
02612         d->type = DOLZERO;
02613         d->size = 0;
02614         return(0);
02615     }
02616     if ( i+2 > d->size ) {
02617         M_free(d->where,"DollarRaiseLow");
02618         d->size = i+2;
02619         if ( d->size < MINALLOC ) d->size = MINALLOC;
02620         d->size = ((d->size+7)/8)*8;
02621         d->where = (WORD *)Malloc1(d->size*sizeof(WORD),"DollarRaiseLow");
02622     }
02623     t1 = d->where; *t1++ = i+1; t2 = (WORD *)dscrat;
02624     while ( --i > 0 ) *t1++ = *t2++;
02625     *t1++ = ndscrat; *t1 = 0;
02626     d->type = DOLTERMS;
02627 }
02628 return(0);
02629 }
02630
02631 /*
02632  #] DollarRaiseLow :
02633  #[ EvalDoLoopArg :
02634  */
02651 WORD EvalDoLoopArg(PHEAD WORD *arg, WORD par)
02652 {
02653     WORD num, type, *td;
02654     DOLLARS d;
02655     if ( *arg == SNUMBER ) return(arg[1]);
02656     if ( *arg == DOLLAREXPR2 && arg[1] < 0 ) return(-arg[1]-1);
02657     d = Dollars + arg[1];
02658     #ifdef WITHPTHREADS
02659     {
02660         int nummodopt, dtype = -1;
02661         if ( AS.MultiThreaded && ( AC.mparallelfalg == PARALLELFLAG ) ) {
02662             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02663                 if ( arg[1] == ModOptdollars[nummodopt].number ) break;
02664             }
02665             if ( nummodopt < NumModOptdollars ) {
02666                 dtype = ModOptdollars[nummodopt].type;
02667                 if ( dtype == MODLOCAL ) {
02668                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
02669                 }
02670             }
02671         }
02672     }
02673     #endif
02674     if ( *arg == DOLLAREXPRESSION ) {
02675         if ( arg[2] != DOLLAREXPR2 ) { /* end of chain */
02676             endofchain:
02677             type = d->type;
02678             if ( type == DOLZERO ) {}
02679             else if ( type == DOLNUMBER ) {
02680                 td = d->where;
02681                 if ( ( td[0] != 4 ) || ( (td[1]&SPECMASK) != 0 ) || ( td[2] != 1 ) ) {
02682                     MLOCK(ErrorMessageLock);
02683                     if ( par == -1 ) {
02684                         MesPrint("$-variable is not a short number in print statement");
02685                     }
02686                     else {
02687                         MesPrint("$-variable is not a short number in do loop");
02688                     }
02689                     MUNLOCK(ErrorMessageLock);
02690                     Terminate(-1);
02691                 }
02692                 return( td[3] > 0 ? td[1]: -td[1] );
02693             }
02694             else {
02695                 MLOCK(ErrorMessageLock);
02696                 if ( par == -1 ) {
02697                     MesPrint("$-variable is not a number in print statement");
02698                 }
02699                 else {
02700                     MesPrint("$-variable is not a number in do loop");
02701                 }
02702                 MUNLOCK(ErrorMessageLock);
02703                 Terminate(-1);
02704             }
02705             return(0);
02706         }
02707         num = EvalDoLoopArg(BHEAD arg+2,par);

```

```

02708     }
02709     else if ( *arg == DOLLAREXP2 ) {
02710         if ( arg[1] < 0 ) { num = -arg[1]-1; }
02711         else if ( arg[2] != DOLLAREXP2 && par == -1 ) {
02712             goto endofchain;
02713         }
02714         else { num = EvalDoLoopArg(BHEAD arg+2,par); }
02715     }
02716     else {
02717         MLOCK(ErrorMessageLock);
02718         if ( par == -1 ) {
02719             MesPrint("Invalid $-variable in print statement");
02720         }
02721         else {
02722             MesPrint("Invalid $-variable in do loop");
02723         }
02724         MUNLOCK(ErrorMessageLock);
02725         Terminate(-1);
02726         return(0);
02727     }
02728     if ( num == 0 ) return(d->nfactors);
02729     if ( num > d->nfactors || num < 1 ) {
02730         MLOCK(ErrorMessageLock);
02731         if ( par == -1 ) {
02732             MesPrint("Not a valid factor number for $-variable in print statement");
02733         }
02734         else {
02735             MesPrint("Not a valid factor number for $-variable in do loop");
02736         }
02737         MUNLOCK(ErrorMessageLock);
02738         Terminate(-1);
02739         return(0);
02740     }
02741     if ( d->factors[num].type == DOLNUMBER )
02742         return(d->factors[num].value);
02743     else { /* If correct, type can only be DOLNUMBER or DOLTERMS */
02744         MLOCK(ErrorMessageLock);
02745         if ( par == -1 ) {
02746             MesPrint("$-variable in print statement is not a number");
02747         }
02748         else {
02749             MesPrint("$-variable in do loop is not a number");
02750         }
02751         MUNLOCK(ErrorMessageLock);
02752         Terminate(-1);
02753         return(0);
02754     }
02755 }
02756
02757 /*
02758 #] EvalDoLoopArg :
02759 #[ TestDoLoop :
02760 */
02761
02762 WORD TestDoLoop(PHEAD WORD *lhsbuf, WORD level)
02763 {
02764     GETBIDENTITY
02765     WORD start,finish,incr;
02766     WORD *h;
02767     DOLLARS d;
02768     h = lhsbuf + 4; /* address of the start value */
02769     start = EvalDoLoopArg(BHEAD h,0);
02770     while ( ( *h == DOLLAREXP2 || *h == DOLLAREXP2 )
02771         && ( h[2] == DOLLAREXP2 ) ) h += 2;
02772     h += 2;
02773     finish = EvalDoLoopArg(BHEAD h,0);
02774     while ( ( *h == DOLLAREXP2 || *h == DOLLAREXP2 )
02775         && ( h[2] == DOLLAREXP2 ) ) h += 2;
02776     h += 2;
02777     incr = EvalDoLoopArg(BHEAD h,0);
02778
02779     if ( ( finish == start ) || ( finish > start && incr > 0 )
02780         || ( finish < start && incr < 0 ) ) {}
02781     else { level = lhsbuf[3]; } /* skips the loop */
02782 /*
02783     Put start in the dollar variable indicated by lhsbuf[2]
02784 */
02785     d = Dollars + lhsbuf[2];
02786 #ifdef WITHPTHREADS
02787     {
02788         int nummodopt, dtype = -1;
02789         if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
02790             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02791                 if ( lhsbuf[2] == ModOptdollars[nummodopt].number ) break;
02792             }
02793             if ( nummodopt < NumModOptdollars ) {
02794                 dtype = ModOptdollars[nummodopt].type;

```

```

02795             if ( dtype == MODLOCAL ) {
02796                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
02797             }
02798         }
02799     }
02800 }
02801 #endif
02802
02803     if ( d->size < MINALLOC ) {
02804         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollar contents");
02805         d->size = MINALLOC;
02806         d->where = (WORD *)Malloc1(d->size*sizeof(WORD),"dollar contents");
02807     }
02808     if ( start > 0 ) {
02809         d->where[0] = 4;
02810         d->where[1] = start;
02811         d->where[2] = 1;
02812         d->where[3] = 3;
02813         d->where[4] = 0;
02814         d->type = DOLNUMBER;
02815     }
02816     else if ( start < 0 ) {
02817         d->where[0] = 4;
02818         d->where[1] = -start;
02819         d->where[2] = 1;
02820         d->where[3] = -3;
02821         d->where[4] = 0;
02822         d->type = DOLNUMBER;
02823     }
02824     else
02825         d->type = DOLZERO;
02826
02827     if ( d == Dollars + lhsbuf[2] ) {
02828         cbuf[AM.dbufnum].CanCommu[lhsbuf[2]] = 0;
02829         cbuf[AM.dbufnum].NumTerms[lhsbuf[2]] = 1;
02830         cbuf[AM.dbufnum].rhs[lhsbuf[2]] = d->where;
02831     }
02832     return(level);
02833 }
02834
02835 /*
02836 #] TestDoLoop :
02837 #[ TestEndDoLoop :
02838 */
02839
02840 WORD TestEndDoLoop(PHEAD WORD *lhsbuf, WORD level)
02841 {
02842     GETBIDENTITY
02843     WORD start,finish,incr,value;
02844     WORD *h;
02845     DOLLARS d;
02846     h = lhsbuf + 4; /* address of the start value */
02847     start = EvalDoLoopArg(BHEAD h,0);
02848     while ( ( *h == DOLLAREXPRESSION || *h == DOLLAREXP2 )
02849         && ( h[2] == DOLLAREXP2 ) ) h += 2;
02850     h += 2;
02851     finish = EvalDoLoopArg(BHEAD h,0);
02852     while ( ( *h == DOLLAREXPRESSION || *h == DOLLAREXP2 )
02853         && ( h[2] == DOLLAREXP2 ) ) h += 2;
02854     h += 2;
02855     incr = EvalDoLoopArg(BHEAD h,0);
02856
02857     if ( ( finish == start ) || ( finish > start && incr > 0 )
02858         || ( finish < start && incr < 0 ) ) {}
02859     else { level = lhsbuf[3]; } /* skips the loop */
02860 /*
02861 Put start in the dollar variable indicated by lhsbuf[2]
02862 */
02863     d = Dollars + lhsbuf[2];
02864 #ifdef WITHPTHREADS
02865     {
02866         int nummodopt, dtype = -1;
02867         if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
02868             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02869                 if ( lhsbuf[2] == ModOptdollars[nummodopt].number ) break;
02870             }
02871             if ( nummodopt < NumModOptdollars ) {
02872                 dtype = ModOptdollars[nummodopt].type;
02873                 if ( dtype == MODLOCAL ) {
02874                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
02875                 }
02876             }
02877         }
02878     }
02879 #endif
02880 /*
02881 Get the value

```

```

02882 */
02883     if ( d->type == DOLZERO ) {
02884         value = 0;
02885     }
02886     else if ( ( d->type == DOLNUMBER || d->type == DOLTERMS )
02887         && ( d->where[4] == 0 ) && ( d->where[0] == 4 )
02888         && ( d->where[1] > 0 ) && ( d->where[2] == 1 ) ) {
02889         value = ( d->where[3] < 0 ) ? -d->where[1]: d->where[1];
02890     }
02891     else {
02892         MLOCK(ErrorMessageLock);
02893         MesPrint("Wrong type of object in do loop parameter");
02894         MUNLOCK(ErrorMessageLock);
02895         Terminate(-1);
02896         return(level);
02897     }
02898     value += incr;
02899     if ( ( finish > start && value <= finish ) ||
02900         ( finish < start && value >= finish ) ||
02901         ( finish == start && value == finish ) ) {}
02902     else level = lhsbuf[3];
02903
02904     if ( d->size < MINALLOC ) {
02905         if ( d->where && d->where != &(AM.dollarzero) ) M_free(d->where,"dollar contents");
02906         d->size = MINALLOC;
02907         d->where = (WORD *)Malloc1(d->size*sizeof(WORD),"dollar contents");
02908     }
02909     if ( value > 0 ) {
02910         d->where[0] = 4;
02911         d->where[1] = value;
02912         d->where[2] = 1;
02913         d->where[3] = 3;
02914         d->where[4] = 0;
02915         d->type = DOLNUMBER;
02916     }
02917     else if ( start < 0 ) {
02918         d->where[0] = 4;
02919         d->where[1] = -value;
02920         d->where[2] = 1;
02921         d->where[3] = -3;
02922         d->where[4] = 0;
02923         d->type = DOLNUMBER;
02924     }
02925     else
02926         d->type = DOLZERO;
02927
02928     if ( d == Dollars + lhsbuf[2] ) {
02929         cbuf[AM.dbufnum].CanCommu[lhsbuf[2]] = 0;
02930         cbuf[AM.dbufnum].NumTerms[lhsbuf[2]] = 1;
02931         cbuf[AM.dbufnum].rhs[lhsbuf[2]] = d->where;
02932     }
02933     return(level);
02934 }
02935
02936 /*
02937     #] TestEndDoLoop :
02938     #[ DollarFactorize :
02939 */
02940 /* #define STEP2 */
02941 #define STEP2
02942
02943 int DollarFactorize(PHEAD WORD numdollar)
02944 {
02945     GETBIDENTITY
02946     DOLLARS d = Dollars + numdollar;
02947     CBUF *C, *CC;
02948     WORD *oldworkpointer;
02949     WORD *buf1, *t, *term, *buf1content, *buf2, *termextra;
02950     WORD *buf3, *argextra;
02951 #ifdef STEP2
02952     WORD *tstop, pow, *r;
02953 #endif
02954     int i, j, jj, action = 0, sign = 1;
02955     LONG insize, ii;
02956     WORD startebuf = cbuf[AT.ebufnum].numrhs;
02957     WORD nfactors, factorsincontent, extrafactor = 0;
02958     WORD oldsorttype = AR.SortType;
02959 #ifdef WITHPTHREADS
02960     int nummodopt, dtype;
02961     dtype = -1;
02962     if ( AS.MultiThreaded ) {
02963         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02964             if ( numdollar == ModOptdollars[nummodopt].number ) break;
02965         }
02966         if ( nummodopt < NumModOptdollars ) {
02967             dtype = ModOptdollars[nummodopt].type;
02968         }
02969     }
02970 #endif

```

```

02981         if ( dtype == MODLOCAL ) {
02982             d = ModOptdollars[nummodopt].dstruct+AT.identity;
02983         }
02984         else {
02985             LOCK(d->pthreadlockread);
02986         }
02987     }
02988 }
02989 #endif
02990 CleanDollarFactors(d);
02991 #ifdef WITHPTHREADS
02992     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
02993 #endif
02994     if ( d->type != DOLTERMS ) { /* only one term */
02995         if ( d->type != DOLZERO ) d->nfactors = 1;
02996         return(0);
02997     }
02998     if ( d->where[d->where[0]] == 0 ) { /* only one term. easy */
02999     }
03000 /*
03001     Here should come the code for the factorization
03002     We copied the routine ArgFactorize in argument.c and changed the
03003     memory management completely. For the actual factorization it
03004     calls WORD *DoFactorizeDollar(PHEAD WORD *expr) which allocates
03005     space for the answer. Notation:
03006     term,...,term,0,term,...,term,0,term,...,term,0,0
03007
03008     #] Step 1: sort the terms properly and/or make copy --> buf1,insize
03009 */
03010     term = d->where;
03011     AR.SortType = SORTHIGHFIRST;
03012     if ( oldsorttype != AR.SortType ) {
03013         NewSort(BHEAD0);
03014         while ( *term ) {
03015             t = term + *term;
03016             if ( AN.ncmod != 0 ) {
03017                 if ( AN.ncmod != 1 || ( (WORD)AN.cmod[0] < 0 ) ) {
03018                     AR.SortType = oldsorttype;
03019                     MLOCK(ErrorMessageLock);
03020                     MesPrint("Factorization modulus a number, greater than a WORD not implemented.");
03021                     MUNLOCK(ErrorMessageLock);
03022                     Terminate(-1);
03023                 }
03024                 if ( Modulus(term) ) {
03025                     AR.SortType = oldsorttype;
03026                     MLOCK(ErrorMessageLock);
03027                     MesCall("DollarFactorize");
03028                     MUNLOCK(ErrorMessageLock);
03029                     Terminate(-1);
03030                 }
03031                 if ( !*term ) { term = t; continue; }
03032             }
03033             StoreTerm(BHEAD term);
03034             term = t;
03035         }
03036         AN.tryterm = 0; /* for now */
03037         EndSort(BHEAD (WORD *)((void *)(&buf1)),2);
03038         t = buf1; while ( *t ) t += *t;
03039         insize = t - buf1;
03040     }
03041     else {
03042         t = term; while ( *t ) t += *t;
03043         ii = insize = t - term;
03044         buf1 = (WORD *)Malloc1((insize+1)*sizeof(WORD),"DollarFactorize-1");
03045         t = buf1;
03046         NCOPY(t,term,ii);
03047         *t++ = 0;
03048     }
03049 /*
03050     #] Step 1:
03051     #] Step 2: take out the 'content'.
03052 */
03053 #ifdef STEP2
03054     buf1content = TermMalloc("DollarContent");
03055     AN.tryterm = -1;
03056     if ( ( buf2 = TakeContent(BHEAD buf1,buf1content) ) == 0 ) {
03057         AN.tryterm = 0;
03058         TermFree(buf1content,"DollarContent");
03059         M_free(buf1,"DollarFactorize-1");
03060         AR.SortType = oldsorttype;
03061         MLOCK(ErrorMessageLock);
03062         MesCall("DollarFactorize");
03063         MUNLOCK(ErrorMessageLock);
03064         Terminate(-1);
03065         return(1);
03066     }
03067     else if ( ( buf1content[0] == 4 ) && ( buf1content[1] == 1 ) &&

```

```

03068         ( buf1content[2] == 1 ) && ( buf1content[3] == 3 ) ) { /* Nothing happened */
03069     AN.tryterm = 0;
03070     if ( buf2 != buf1 ) {
03071         M_free(buf2,"DollarFactorize-2");
03072         buf2 = buf1;
03073     }
03074     factorsincontent = 0;
03075 }
03076 else {
03077 /*
03078     The way we took out objects is rather brutish. We have to normalize
03079 */
03080     AN.tryterm = 0;
03081     if ( buf2 != buf1 ) M_free(buf1,"DollarFactorize-1");
03082     buf1 = buf2;
03083     t = buf1; while ( *t ) t += *t;
03084     insize = t - buf1;
03085 /*
03086     Now analyse how many factors there are in the content
03087 */
03088     factorsincontent = 0;
03089     term = buf1content;
03090     tstop = term + *term;
03091     if ( tstop[-1] < 0 ) factorsincontent++;
03092     if ( ABS(tstop[-1]) == 3 && tstop[-2] == 1 && tstop[-3] == 1 ) {
03093         tstop -= ABS(tstop[-1]);
03094     }
03095     else {
03096         factorsincontent++;
03097         tstop -= ABS(tstop[-1]);
03098     }
03099     term++;
03100     while ( term < tstop ) {
03101         switch ( *term ) {
03102             case SYMBOL:
03103                 t = term+2; i = (term[1]-2)/2;
03104                 while ( i > 0 ) {
03105                     factorsincontent += ABS(t[1]);
03106                     i--; t += 2;
03107                 }
03108                 break;
03109             case DOTPRODUCT:
03110                 t = term+2; i = (term[1]-2)/3;
03111                 while ( i > 0 ) {
03112                     factorsincontent += ABS(t[2]);
03113                     i--; t += 3;
03114                 }
03115                 break;
03116             case VECTOR:
03117             case DELTA:
03118                 factorsincontent += (term[1]-2)/2;
03119                 break;
03120             case INDEX:
03121                 factorsincontent += term[1]-2;
03122                 break;
03123             default:
03124                 if ( *term >= FUNCTION ) factorsincontent++;
03125                 break;
03126         }
03127         term += term[1];
03128     }
03129 }
03130 #else
03131     factorsincontent = 0;
03132     buf1content = 0;
03133 #endif
03134 /*
03135     #] Step 2: take out the 'content'.
03136     #[ Step 3: ConvertToPoly
03137         if there are objects that are not SYMBOLs,
03138         invoke ConvertToPoly
03139         We keep the original in buf1 in case there are no factors
03140 */
03141     t = buf1;
03142     while ( *t ) {
03143         if ( ( t[1] != SYMBOL ) && ( *t != (ABS(t[*t-1])+1) ) ) {
03144             action = 1; break;
03145         }
03146         t += *t;
03147     }
03148     if ( DetCommu(buf1) > 1 ) {
03149         MesPrint("Cannot factorize a $-expression with more than one noncommuting object");
03150         AR.SortType = oldsorttype;
03151         M_free(buf1,"DollarFactorize-2");
03152         if ( buf1content ) TermFree(buf1content,"DollarContent");
03153         MesCall("DollarFactorize");
03154         Terminate(-1);

```

```

03155         return(-1);
03156     }
03157     if ( action ) {
03158         t = buf1;
03159         termextra = AT.WorkPointer;
03160         NewSort(BHEAD0);
03161         NewSort(BHEAD0);
03162         while ( *t ) {
03163             if ( LocalConvertToPoly(BHEAD t,termextra,startebuf,0) < 0 ) {
03164 getout:
03165                 AR.SortType = oldsorttype;
03166                 M_free(buf1,"DollarFactorize-2");
03167                 if ( buf1content ) TermFree(buf1content,"DollarContent");
03168                 MesCall("DollarFactorize");
03169                 Terminate(-1);
03170                 return(-1);
03171             }
03172             StoreTerm(BHEAD termextra);
03173             t += *t;
03174         }
03175         AN.tryterm = 0; /* for now */
03176         if ( EndSort(BHEAD (WORD *)((void *)&buf2)),2) < 0 ) { goto getout; }
03177         LowerSortLevel();
03178         t = buf2; while ( *t > 0 ) t += *t;
03179     }
03180     else {
03181         buf2 = buf1;
03182     }
03183     /*
03184         #] Step 3: ConvertToPoly
03185         #[ Step 4: Now the hard work.
03186     */
03187     if ( ( buf3 = poly_factorize_dollar(BHEAD buf2) ) == 0 ) {
03188         MesCall("DollarFactorize");
03189         AR.SortType = oldsorttype;
03190         if ( buf2 != buf1 && buf2 ) M_free(buf2,"DollarFactorize-3");
03191         M_free(buf1,"DollarFactorize-3");
03192         if ( buf1content ) TermFree(buf1content,"DollarContent");
03193         Terminate(-1);
03194         return(-1);
03195     }
03196     if ( buf2 != buf1 && buf2 ) {
03197         M_free(buf2,"DollarFactorize-3");
03198         buf2 = 0;
03199     }
03200     term = buf3;
03201     AR.SortType = oldsorttype;
03202     /*
03203     Count the factors and strip a factor -1
03204     */
03205     nfactors = 0;
03206     while ( *term ) {
03207 #ifdef STEP2
03208         if ( *term == 4 && term[4] == 0 && term[3] == -3 && term[2] == 1
03209             && term[1] == 1 ) {
03210             WORD *tt1, *tt2, *ttstop;
03211             sign = -sign;
03212             tt1 = term; tt2 = term + *term + 1;
03213             ttstop = tt2;
03214             while ( *ttstop ) {
03215                 while ( *ttstop ) ttstop += *ttstop;
03216                 ttstop++;
03217             }
03218             while ( tt2 < ttstop ) *tt1++ = *tt2++;
03219             *tt1 = 0;
03220             factorsincontent++;
03221             extrafactor++;
03222         }
03223     else
03224 #endif
03225     {
03226         term += *term;
03227         while ( *term ) { term += *term; }
03228         nfactors++; term++;
03229     }
03230 }
03231 /*
03232     We have now:
03233     buf1: the original before ConvertToPoly for if only one factor
03234     buf3: the factored expression with nfactors factors
03235
03236     #] Step 4:
03237     #[ Step 5: ConvertFromPoly
03238         If ConvertToPoly was used, use now ConvertFromPoly
03239         Be careful: there should be more than one factor now.
03240     */
03241 #ifdef WITHPTHREADS

```

```

03242     if ( dtype > 0 && dtype != MODLOCAL ) { LOCK(d->pthreadlockread); }
03243 #endif
03244     if ( nfactors == 1 && extrafactor == 0 ) { /* we can use the buf1 contents */
03245         if ( factorsincontent == 0 ) {
03246             d->nfactors = 1;
03247 #ifdef WITHPTHREADS
03248             if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
03249 #endif
03250 /*
03251     We used here (before 3-sep-2015) the original and did not make
03252     provisions for having a factors struct, figuring that all info
03253     is identical to the full dollar. This makes things too
03254     complicated at later stages.
03255 */
03256     d->factors = (FACDOLLAR *)Malloc1(sizeof(FACDOLLAR),"factors in dollar");
03257     term = buf1; while ( *term ) term += *term;
03258     d->factors[0].size = i = term - buf1;
03259     d->factors[0].where = t = (WORD *)Malloc1(sizeof(WORD)*(i+1),"DollarFactorize-5");
03260     term = buf1; NCOPY(t,term,i); *t = 0;
03261     AR.SortType = oldsorttype;
03262     M_free(buf3,"DollarFactorize-4");
03263     if ( buf2 != buf1 && buf2 ) M_free(buf2,"DollarFactorize-4");
03264     M_free(buf1,"DollarFactorize-4");
03265     if ( buf1content ) TermFree(buf1content,"DollarContent");
03266     return(0);
03267 }
03268     else {
03269         d->factors = (FACDOLLAR *)Malloc1(sizeof(FACDOLLAR)*(nfactors+factorsincontent),"factors
in dollar");
03270         term = buf1; while ( *term ) term += *term;
03271         d->factors[0].size = i = term - buf1;
03272         d->factors[0].where = t = (WORD *)Malloc1(sizeof(WORD)*(i+1),"DollarFactorize-5");
03273         term = buf1; NCOPY(t,term,i); *t = 0;
03274         M_free(buf3,"DollarFactorize-4");
03275         buf3 = 0;
03276         if ( buf2 != buf1 && buf2 ) {
03277             M_free(buf2,"DollarFactorize-4");
03278             buf2 = 0;
03279         }
03280     }
03281 }
03282     else if ( action ) {
03283         C = cbuf+AC.cbunum;
03284         CC = cbuf+AT.ebunum;
03285         oldworkpointer = AT.WorkPointer;
03286         d->factors = (FACDOLLAR *)Malloc1(sizeof(FACDOLLAR)*(nfactors+factorsincontent),"factors in
dollar");
03287         term = buf3;
03288         for ( i = 0; i < nfactors; i++ ) {
03289             argextra = AT.WorkPointer;
03290             NewSort(BHEAD0);
03291             NewSort(BHEAD0);
03292             while ( *term ) {
03293                 if ( ConvertFromPoly(BHEAD term,argextra,numxsymbol,CC->numrhs-startebuf+numxsymbol
,startebuf-numxsymbol,1) <= 0 ) {
03294                     LowerSortLevel();
03295                     AR.SortType = oldsorttype;
03296 getout2:
03297                     M_free(d->factors,"factors in dollar");
03298                     d->factors = 0;
03299 #ifdef WITHPTHREADS
03300                     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
03301 #endif
03302                     M_free(buf3,"DollarFactorize-4");
03303                     if ( buf2 != buf1 && buf2 ) M_free(buf2,"DollarFactorize-4");
03304                     M_free(buf1,"DollarFactorize-4");
03305                     if ( buf1content ) TermFree(buf1content,"DollarContent");
03306                     return(-3);
03307                 }
03308                 AT.WorkPointer = argextra + *argextra;
03309 /*
03310             ConvertFromPoly leaves terms with subexpressions. Hence:
03311 */
03312                 if ( Generator(BHEAD argextra,C->numlhs+1) ) {
03313                     goto getout2;
03314                 }
03315                 term += *term;
03316             }
03317             term++;
03318             AT.WorkPointer = oldworkpointer;
03319             AN.tryterm = 0; /* for now */
03320             EndSort(BHEAD (WORD *)((void *)(&(d->factors[i].where))),2);
03321             LowerSortLevel();
03322             d->factors[i].type = DOLTERMS;
03323             t = d->factors[i].where;
03324             while ( *t ) t += *t;
03325             d->factors[i].size = t - d->factors[i].where;
03326         }

```



```

03327     CC->numrhs = startebuf;
03328 }
03329 else {
03330     C = cbuf+AC.cbufnum;
03331     oldworkpointer = AT.WorkPointer;
03332     d->factors = (FACDOLLAR *)Malloc1(sizeof(FACDOLLAR)*(nfactors+factorsincontent),"factors in
dollar");
03333     term = buf3;
03334     for ( i = 0; i < nfactors; i++ ) {
03335         NewSort(BHEAD0);
03336         while ( *term ) {
03337             argextra = oldworkpointer;
03338             j = *term;
03339             NCOPY(argextra,term,j)
03340             AT.WorkPointer = argextra;
03341             if ( Generator(BHEAD oldworkpointer,C->numlhs+1) ) {
03342                 goto getout2;
03343             }
03344         }
03345         term++;
03346         AT.WorkPointer = oldworkpointer;
03347         AN.tryterm = 0; /* for now */
03348         EndSort(BHEAD (WORD *)((void *)(&(d->factors[i].where))),2);
03349         d->factors[i].type = DOLTERMS;
03350         t = d->factors[i].where;
03351         while ( *t ) t += *t;
03352         d->factors[i].size = t - d->factors[i].where;
03353     }
03354 }
03355 d->nfactors = nfactors + factorsincontent;
03356 /*
03357     #] Step 5: ConvertFromPoly
03358     #[ Step 6: The factors of the content
03359 */
03360 if ( buf3 ) M_free(buf3,"DollarFactorize-5");
03361 if ( buf2 != buf1 && buf2 ) M_free(buf2,"DollarFactorize-5");
03362 M_free(buf1,"DollarFactorize-5");
03363 j = nfactors;
03364 #ifdef STEP2
03365 term = buf1content;
03366 tstop = term + *term;
03367 if ( tstop[-1] < 0 ) { tstop[-1] = -tstop[-1]; sign = -sign; }
03368 tstop -= tstop[-1];
03369 term++;
03370 while ( term < tstop ) {
03371     switch ( *term ) {
03372     case SYMBOL:
03373         t = term+2; i = (term[1]-2)/2;
03374         while ( i > 0 ) {
03375             if ( t[1] < 0 ) { t[1] = -t[1]; pow = -1; }
03376             else { pow = 1; }
03377             for ( jj = 0; jj < t[1]; jj++ ) {
03378                 r = d->factors[j].where = (WORD *)Malloc1(9*sizeof(WORD),"factor");
03379                 r[0] = 8; r[1] = SYMBOL; r[2] = 4; r[3] = *t; r[4] = pow;
03380                 r[5] = 1; r[6] = 1; r[7] = 3; r[8] = 0;
03381                 d->factors[j].type = DOLTERMS;
03382                 d->factors[j].size = 8;
03383                 j++;
03384             }
03385             i--; t += 2;
03386         }
03387         break;
03388     case DOTPRODUCT:
03389         t = term+2; i = (term[1]-2)/3;
03390         while ( i > 0 ) {
03391             if ( t[2] < 0 ) { t[2] = -t[2]; pow = -1; }
03392             else { pow = 1; }
03393             for ( jj = 0; jj < t[2]; jj++ ) {
03394                 r = d->factors[j].where = (WORD *)Malloc1(10*sizeof(WORD),"factor");
03395                 r[0] = 9; r[1] = DOTPRODUCT; r[2] = 5; r[3] = t[0]; r[4] = t[1];
03396                 r[5] = pow; r[6] = 1; r[7] = 1; r[8] = 3; r[9] = 0;
03397                 d->factors[j].type = DOLTERMS;
03398                 d->factors[j].size = 9;
03399                 j++;
03400             }
03401             i--; t += 3;
03402         }
03403         break;
03404     case VECTOR:
03405     case DELTA:
03406         t = term+2; i = (term[1]-2)/2;
03407         while ( i > 0 ) {
03408             for ( jj = 0; jj < t[1]; jj++ ) {
03409                 r = d->factors[j].where = (WORD *)Malloc1(9*sizeof(WORD),"factor");
03410                 r[0] = 8; r[1] = *term; r[2] = 4; r[3] = *t; r[4] = t[1];
03411                 r[5] = 1; r[6] = 1; r[7] = 3; r[8] = 0;
03412                 d->factors[j].type = DOLTERMS;

```

```

03413             d->factors[j].size = 8;
03414             j++;
03415         }
03416         i--; t += 2;
03417     }
03418     break;
03419 case INDEX:
03420     t = term+2; i = term[1]-2;
03421     while ( i > 0 ) {
03422         for ( jj = 0; jj < t[1]; jj++ ) {
03423             r = d->factors[j].where = (WORD *)Malloca1(8*sizeof(WORD), "factor");
03424             r[0] = 7; r[1] = *term; r[2] = 3; r[3] = *t;
03425             r[4] = 1; r[5] = 1; r[6] = 3; r[7] = 0;
03426             d->factors[j].type = DOLTERMS;
03427             d->factors[j].size = 7;
03428             j++;
03429         }
03430         i--; t++;
03431     }
03432     break;
03433 default:
03434     if ( *term >= FUNCTION ) {
03435         r = d->factors[j].where = (WORD *)Malloca1((term[1]+5)*sizeof(WORD), "factor");
03436         *r++ = d->factors[j].size = term[1]+4;
03437         for ( jj = 0; jj < t[1]; jj++ ) *r++ = term[jj];
03438         *r++ = 1; *r++ = 1; *r++ = 3; *r = 0;
03439         j++;
03440     }
03441     break;
03442 }
03443 term += term[1];
03444 }
03445 #endif
03446 /*
03447     #] Step 6:
03448     #[ Step 7: Numerical factors
03449 */
03450 #ifdef STEP2
03451     term = buf1content;
03452     tstop = term + *term;
03453     if ( tstop[-1] == 3 && tstop[-2] == 1 && tstop[-3] == 1 ) {}
03454     else if ( tstop[-1] == 3 && tstop[-2] == 1 && (UWORD)(tstop[-3]) <= MAXPOSITIVE ) {
03455         d->factors[j].where = 0;
03456         d->factors[j].size = 0;
03457         d->factors[j].type = DOLNUMBER;
03458         d->factors[j].value = sign*tstop[-3];
03459         sign = 1;
03460         j++;
03461     }
03462     else {
03463         d->factors[j].where = r = (WORD *)Malloca1((tstop[-1]+2)*sizeof(WORD), "numfactor");
03464         d->factors[j].size = tstop[-1]+1;
03465         d->factors[j].type = DOLTERMS;
03466         d->factors[j].value = 0;
03467         i = tstop[-1];
03468         t = tstop - i;
03469         *r++ = tstop[-1]+1;
03470         NCOPY(r,t,i);
03471         *r = 0;
03472         if ( sign < 0 ) {
03473             r = d->factors[j].where;
03474             while ( *r ) {
03475                 r += *r; r[-1] = -r[-1];
03476             }
03477             sign = 1;
03478         }
03479         j++;
03480     }
03481 #endif
03482 if ( sign < 0 ) { /* Note that this guy should come first */
03483     for ( jj = j; jj > 0; jj-- ) {
03484         d->factors[jj] = d->factors[jj-1];
03485     }
03486     d->factors[0].where = 0;
03487     d->factors[0].size = 0;
03488     d->factors[0].type = DOLNUMBER;
03489     d->factors[0].value = -1;
03490     j++;
03491 }
03492 d->nfactors = j;
03493 if ( buf1content ) TermFree(buf1content, "DollarContent");
03494 /*
03495     #] Step 7:
03496     #[ Step 8: Sorting the factors
03497
03498     There are d->nfactors factors. Look which ones have a 'where'
03499     Sort them by bubble sort

```

```

03500 /*
03501     if ( d->nfactors > 1 ) {
03502         WORD ***fac, j1, j2, k, ret, *s1, *s2, *s3;
03503         LONG **facsize, x;
03504         facsize = (LONG **)Malloc1((sizeof(WORD **)+sizeof(LONG *))d->nfactors,"SortDollarFactors");
03505         fac = (WORD **)(facsize+d->nfactors);
03506         k = 0;
03507         for ( j = 0; j < d->nfactors; j++ ) {
03508             if ( d->factors[j].where ) {
03509                 fac[k] = &(d->factors[j].where);
03510                 facsize[k] = &(d->factors[j].size);
03511                 k++;
03512             }
03513         }
03514         if ( k > 1 ) {
03515             for ( j = 1; j < k; j++ ) { /* bubble sort */
03516                 j1 = j; j2 = j1-1;
03517 nextj1:;
03518                 s1 = *(fac[j1]); s2 = *(fac[j2]);
03519                 while ( *s1 && *s2 ) {
03520                     if ( ( ret = CompareTerms(BHEAD s2, s1, (WORD)2) ) == 0 ) {
03521                         s1 += *s1; s2 += *s2;
03522                     }
03523                     else if ( ret > 0 ) goto nextj;
03524                     else {
03525 exch:
03526                         s3 = *(fac[j1]); *(fac[j1]) = *(fac[j2]); *(fac[j2]) = s3;
03527                         x = *(facsize[j1]); *(facsize[j1]) = *(facsize[j2]); *(facsize[j2]) = x;
03528                         j1--; j2--;
03529                         if ( j1 > 0 ) goto nextj1;
03530                         goto nextj;
03531                     }
03532                 }
03533                 if ( *s1 ) goto nextj;
03534                 if ( *s2 ) goto exch;
03535 nextj:;
03536             }
03537         }
03538         M_free(facsize,"SortDollarFactors");
03539     }
03540     /*
03541         #] Step 8:
03542     */
03543     #ifdef WITHPTHREADS
03544     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
03545     #endif
03546     return(0);
03547 }
03548
03549 /*
03550     #] DollarFactorize :
03551     #[ CleanDollarFactors :
03552 */
03553
03554 void CleanDollarFactors(DOLLARS d)
03555 {
03556     int i;
03557     if ( d->nfactors >= 1 ) {
03558         for ( i = 0; i < d->nfactors; i++ ) {
03559             if ( d->factors[i].where )
03560                 if ( d->factors[i].where )
03561                     M_free(d->factors[i].where,"dollar factors");
03562             }
03563         }
03564         if ( d->factors ) {
03565             M_free(d->factors,"dollar factors");
03566             d->factors = 0;
03567         }
03568         d->nfactors = 0;
03569     }
03570
03571     /*
03572         #] CleanDollarFactors :
03573         #[ TakeDollarContent :
03574     */
03575
03576     WORD *TakeDollarContent(PHEAD WORD *dollarbuffer, WORD **factor)
03577     {
03578         WORD *remain, *t;
03579         int pow;
03580         /*
03581             We force the sign of the first term to be positive.
03582         */
03583         t = dollarbuffer; pow = 1;
03584         t += *t;
03585         if ( t[-1] < 0 ) {
03586             pow = 0;

```

```

03587         t[-1] = -t[-1];
03588         while ( *t ) {
03589             t += *t; t[-1] = -t[-1];
03590         }
03591     }
03592 /*
03593     Now the GCD of the numerators and the LCM of the denominators:
03594 */
03595     if ( AN.cmod != 0 ) {
03596         if ( ( *factor = MakeDollarMod(BHEAD dollarbuffer,&remain) ) == 0 ) {
03597             Terminate(-1);
03598         }
03599         if ( pow == 0 ) {
03600             (*factor)[**factor-1] = -(*factor)[**factor-1];
03601             (*factor)[**factor-1] += AN.cmod[0];
03602         }
03603     }
03604     else {
03605         if ( ( *factor = MakeDollarInteger(BHEAD dollarbuffer,&remain) ) == 0 ) {
03606             Terminate(-1);
03607         }
03608         if ( pow == 0 ) {
03609             (*factor)[**factor-1] = -(*factor)[**factor-1];
03610         }
03611     }
03612     return(remain);
03613 }
03614
03615 /*
03616     #] TakeDollarContent :
03617     #[ MakeDollarInteger :
03618 */
03628 WORD *MakeDollarInteger(PHEAD WORD *bufin,WORD **bufout)
03629 {
03630     GETBIDENTITY
03631     UWORD *GCDBuffer, *GCDBuffer2, *LCMbuffer, *LCMb, *LCMc;
03632     WORD *r, *r1, *r2, *r3, *rnext, i, k, j, *oldworkpointer, *factor;
03633     WORD kGCD, kLCM, kGCD2, kLCM2, jLCM, jGCD;
03634     CBUF *C = cbuf+AC.cbunum;
03635
03636     GCDBuffer = NumberMalloc("MakeDollarInteger");
03637     GCDBuffer2 = NumberMalloc("MakeDollarInteger");
03638     LCMbuffer = NumberMalloc("MakeDollarInteger");
03639     LCMb = NumberMalloc("MakeDollarInteger");
03640     LCMc = NumberMalloc("MakeDollarInteger");
03641     r = bufin;
03642 /*
03643     First take the first term to load up the LCM and the GCD
03644 */
03645     r2 = r + *r;
03646     j = r2[-1];
03647     r3 = r2 - ABS(j);
03648     k = REDLENG(j);
03649     if ( k < 0 ) k = -k;
03650     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03651     for ( kGCD = 0; kGCD < k; kGCD++ ) GCDBuffer[kGCD] = r3[kGCD];
03652     k = REDLENG(j);
03653     if ( k < 0 ) k = -k;
03654     r3 += k;
03655     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03656     for ( kLCM = 0; kLCM < k; kLCM++ ) LCMbuffer[kLCM] = r3[kLCM];
03657     r1 = r2;
03658 /*
03659     Now go through the rest of the terms in this argument.
03660 */
03661     while ( *r1 ) {
03662         r2 = r1 + *r1;
03663         j = r2[-1];
03664         r3 = r2 - ABS(j);
03665         k = REDLENG(j);
03666         if ( k < 0 ) k = -k;
03667         while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03668         if ( ( ( GCDBuffer[0] == 1 ) && ( kGCD == 1 ) ) ) {
03669 /*
03670             GCD is already 1
03671 */
03672         }
03673         else if ( ( ( k != 1 ) || ( r3[0] != 1 ) ) ) {
03674             if ( GcdLong(BHEAD GCDBuffer,kGCD,(UWORD *)r3,k,GCDBuffer2,&kGCD2) ) {
03675                 goto MakeDollarIntegerErr;
03676             }
03677             kGCD = kGCD2;
03678             for ( i = 0; i < kGCD; i++ ) GCDBuffer[i] = GCDBuffer2[i];
03679         }
03680         else {
03681             kGCD = 1; GCDBuffer[0] = 1;
03682         }

```

```

03683     k = REDLENG(j);
03684     if ( k < 0 ) k = -k;
03685     r3 += k;
03686     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
03687     if ( ( ( LCMbuffer[0] == 1 ) && ( kLCM == 1 ) ) ) {
03688         for ( kLCM = 0; kLCM < k; kLCM++ )
03689             LCMbuffer[kLCM] = r3[kLCM];
03690     }
03691     else if ( ( k != 1 ) || ( r3[0] != 1 ) ) {
03692         if ( GcdLong(BHEAD LCMbuffer,kLCM, (UWORD *)r3,k,LCMb,&kkLCM) ) {
03693             goto MakeDollarIntegerErr;
03694         }
03695         DivLong((UWORD *)r3,k,LCMb,kkLCM,LCMb,&kkLCM,LCMc,&jLCM);
03696         Mullong(LCMbuffer,kLCM,LCMb,kkLCM,LCMc,&jLCM);
03697         for ( kLCM = 0; kLCM < jLCM; kLCM++ )
03698             LCMbuffer[kLCM] = LCMc[kLCM];
03699     }
03700     else {} /* LCM doesn't change */
03701     r1 = r2;
03702 }
03703 /*
03704 Now put the factor together: GCD/LCM
03705 */
03706 r3 = (WORD *) (GCDbuffer);
03707 if ( kGCD == kLCM ) {
03708     for ( jGCD = 0; jGCD < kGCD; jGCD++ )
03709         r3[jGCD+kGCD] = LCMbuffer[jGCD];
03710     k = kGCD;
03711 }
03712 else if ( kGCD > kLCM ) {
03713     for ( jGCD = 0; jGCD < kLCM; jGCD++ )
03714         r3[jGCD+kGCD] = LCMbuffer[jGCD];
03715     for ( jGCD = kLCM; jGCD < kGCD; jGCD++ )
03716         r3[jGCD+kGCD] = 0;
03717     k = kGCD;
03718 }
03719 else {
03720     for ( jGCD = kGCD; jGCD < kLCM; jGCD++ )
03721         r3[jGCD] = 0;
03722     for ( jGCD = 0; jGCD < kLCM; jGCD++ )
03723         r3[jGCD+kLCM] = LCMbuffer[jGCD];
03724     k = kLCM;
03725 }
03726 j = 2*k+1;
03727 /*
03728 Now we have to write this to factor
03729 */
03730 factor = r1 = (WORD *)Malloc1((j+2)*sizeof(WORD),"MakeDollarInteger");
03731 *r1++ = j+1; r2 = r3;
03732 for ( i = 0; i < k; i++ ) { *r1++ = *r2++; *r1++ = *r2++; }
03733 *r1++ = j;
03734 *r1 = 0;
03735 /*
03736 Next we have to take the factor out from the argument.
03737 This cannot be done in location, because the denominator stuff can make
03738 coefficients longer.
03739
03740 We do this via a sort because the things may be jumbled any way and we
03741 do not know in advance how much space we need.
03742 */
03743 NewSort(BHEAD0);
03744 r = bufin;
03745 oldworkpointer = AT.WorkPointer;
03746 while ( *r ) {
03747     rnext = r + *r;
03748     j = ABS(rnext[-1]);
03749     r3 = rnext - j;
03750     r2 = oldworkpointer;
03751     while ( r < r3 ) *r2++ = *r++;
03752     j = (j-1)/2; /* reduced length. Remember, k is the other red length */
03753     if ( DivRat(BHEAD (UWORD *)r3,j,GCDbuffer,k, (UWORD *)r2,&i) ) {
03754         goto MakeDollarIntegerErr;
03755     }
03756     i = 2*i+1;
03757     r2 = r2 + i;
03758     if ( rnext[-1] < 0 ) r2[-1] = -i;
03759     else r2[-1] = i;
03760     *oldworkpointer = r2-oldworkpointer;
03761     AT.WorkPointer = r2;
03762     if ( Generator(BHEAD oldworkpointer,C->numlhs) ) {
03763         goto MakeDollarIntegerErr;
03764     }
03765     r = rnext;
03766 }
03767 AT.WorkPointer = oldworkpointer;
03768 AN.tryterm = 0; /* for now */
03769 EndSort(BHEAD (WORD *)bufout,2);

```

```

03770 /*
03771 Cleanup
03772 */
03773 NumberFree(LCMc,"MakeDollarInteger");
03774 NumberFree(LCMb,"MakeDollarInteger");
03775 NumberFree(LCMbuffer,"MakeDollarInteger");
03776 NumberFree(GCDBuffer2,"MakeDollarInteger");
03777 NumberFree(GCDBuffer,"MakeDollarInteger");
03778 return(factor);
03779
03780 MakeDollarIntegerErr:
03781 NumberFree(LCMc,"MakeDollarInteger");
03782 NumberFree(LCMb,"MakeDollarInteger");
03783 NumberFree(LCMbuffer,"MakeDollarInteger");
03784 NumberFree(GCDBuffer2,"MakeDollarInteger");
03785 NumberFree(GCDBuffer,"MakeDollarInteger");
03786 MesCall("MakeDollarInteger");
03787 Terminate(-1);
03788 return(0);
03789 }
03790
03791 /*
03792 #] MakeDollarInteger :
03793 #[ MakeDollarMod :
03794 */
03802 WORD *MakeDollarMod(PHEAD WORD *buffer, WORD **bufout)
03803 {
03804     GETBIDENTITY
03805     WORD *r, *r1, x, xx, ix, ip;
03806     WORD *factor, *oldworkpointer;
03807     int i;
03808     CBUF *C = cbuf+AC.cbunum;
03809     r = buffer;
03810     x = r[*r-3];
03811     if ( r[*r-1] < 0 ) x += AN.cmod[0];
03812     if ( GetModInverses(x, (WORD) (AN.cmod[0]), &ix, &ip) ) {
03813         Terminate(-1);
03814     }
03815     factor = (WORD *)Malloca(5*sizeof(WORD), "MakeDollarMod");
03816     factor[0] = 4; factor[1] = x; factor[2] = 1; factor[3] = 3; factor[4] = 0;
03817 /*
03818 Now we have to multiply all coefficients by ix.
03819 This does not make things longer, but we should keep to the conventions
03820 of MakeDollarInteger.
03821 */
03822 NewSort(BHEAD0);
03823 r = buffer;
03824 oldworkpointer = AT.WorkPointer;
03825 while ( *r ) {
03826     r1 = oldworkpointer; i = *r;
03827     NCOPY(r1, r, i);
03828     xx = r1[-3]; if ( r1[-1] < 0 ) xx += AN.cmod[0];
03829     r1[-1] = (WORD) (((LONG)xx)*ix) % AN.cmod[0];
03830     *r1 = 0; AT.WorkPointer = r1;
03831     if ( Generator(BHEAD oldworkpointer, C->numlhs) ) {
03832         Terminate(-1);
03833     }
03834 }
03835 AT.WorkPointer = oldworkpointer;
03836 AN.tryterm = 0; /* for now */
03837 EndSort(BHEAD (WORD *)bufout, 2);
03838 return(factor);
03839 }
03840 /*
03841 #] MakeDollarMod :
03842 #[ GetDolNum :
03843
03844 Evaluates a chain of DOLLAREXPR2 into a number
03845 */
03846
03847 int GetDolNum(PHEAD WORD *t, WORD *tstop)
03848 {
03849     DOLLARS d;
03850     WORD num, *w;
03851     if ( t+3 < tstop && t[3] == DOLLAREXPR2 ) {
03852         d = Dollars + t[2];
03853 #ifdef WITHPTHREADS
03854     {
03855         int nummodopt, dtype;
03856         dtype = -1;
03857         if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
03858             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
03859                 if ( t[2] == ModOptdollars[nummodopt].number ) break;
03860             }
03861             if ( nummodopt < NumModOptdollars ) {
03862                 dtype = ModOptdollars[nummodopt].type;
03863                 if ( dtype == MODLOCAL ) {

```

```

03864         d = ModOptdollars[nummodopt].dstruct+AT.identity;
03865     }
03866     else {
03867         MLOCK(ErrorMessageLock);
03868         MesPrint("&Illegal attempt to use $-variable %s in module %1",
03869             DOLLARNAME(Dollars,t[2]),AC.CModule);
03870         MUNLOCK(ErrorMessageLock);
03871         Terminate(-1);
03872     }
03873 }
03874 }
03875 }
03876 #endif
03877 if ( d->factors == 0 ) {
03878     MLOCK(ErrorMessageLock);
03879     MesPrint("Attempt to use a factor of an unfactored $-variable");
03880     MUNLOCK(ErrorMessageLock);
03881     Terminate(-1);
03882 }
03883 num = GetDolNum(BHEAD t+t[1],tstop);
03884 if ( num == 0 ) return(d->nfactors);
03885 if ( num > d->nfactors ) {
03886     MLOCK(ErrorMessageLock);
03887     MesPrint("Attempt to use an nonexistent factor %d of a $-variable",num);
03888     MUNLOCK(ErrorMessageLock);
03889     Terminate(-1);
03890 }
03891 w = d->factors[num-1].where;
03892 if ( w == 0 ) return(d->factors[num-1].value);
03893 if ( w[0] == 4 && w[4] == 0 && w[3] == 3 && w[2] == 1 && w[1] > 0
03894     && w[1] < MAXPOSITIVE ) return(w[1]);
03895 else {
03896     MLOCK(ErrorMessageLock);
03897     MesPrint("Illegal type of factor number of a $-variable");
03898     MUNLOCK(ErrorMessageLock);
03899     Terminate(-1);
03900 }
03901 }
03902 else if ( t[2] < 0 ) {
03903     return(-t[2]-1);
03904 }
03905 else {
03906     d = Dollars + t[2];
03907 #ifdef WITHPTHREADS
03908     {
03909         int nummodopt, dtype;
03910         dtype = -1;
03911         if ( AS.MultiThreaded && ( AC.mparallelfalg == PARALLELFALG ) ) {
03912             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
03913                 if ( t[2] == ModOptdollars[nummodopt].number ) break;
03914             }
03915             if ( nummodopt < NumModOptdollars ) {
03916                 dtype = ModOptdollars[nummodopt].type;
03917                 if ( dtype == MODLOCAL ) {
03918                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
03919                 }
03920                 else {
03921                     MLOCK(ErrorMessageLock);
03922                     MesPrint("&Illegal attempt to use $-variable %s in module %1",
03923                         DOLLARNAME(Dollars,t[2]),AC.CModule);
03924                     MUNLOCK(ErrorMessageLock);
03925                     Terminate(-1);
03926                 }
03927             }
03928         }
03929     }
03930 #endif
03931 if ( d->type == DOLZERO ) return(0);
03932 if ( d->type == DOLTERMS || d->type == DOLNUMBER ) {
03933     if ( d->where[0] == 4 && d->where[4] == 0 && d->where[3] == 3
03934         && d->where[2] == 1 && d->where[1] > 0
03935         && d->where[1] < MAXPOSITIVE ) return(d->where[1]);
03936     MLOCK(ErrorMessageLock);
03937     MesPrint("Attempt to use an nonexistent factor of a $-variable");
03938     MUNLOCK(ErrorMessageLock);
03939     Terminate(-1);
03940 }
03941 MLOCK(ErrorMessageLock);
03942 MesPrint("Illegal type of factor number of a $-variable");
03943 MUNLOCK(ErrorMessageLock);
03944 Terminate(-1);
03945 }
03946 return(0);
03947 }
03948
03949 /*
03950 #] GetDolNum :

```

```

03951     #[ AddPotModdollar :
03952     */
03953
03960 void AddPotModdollar (WORD numdollar)
03961 {
03962     int i, n = NumPotModdollars;
03963     for ( i = 0; i < n; i++ ) {
03964         if ( numdollar == PotModdollars[i] ) break;
03965     }
03966     if ( i >= n ) {
03967         *(WORD *)FromList (&AC.PotModDolList) = numdollar;
03968     }
03969 }
03970
03971 /*
03972     #] AddPotModdollar :
03973     */

```


4.29 evaluate.c File Reference

```

#include "form3.h"
#include <stdarg.h>
#include <gmp.h>
#include <mpfr.h>

```

Include dependency graph for evaluate.c:

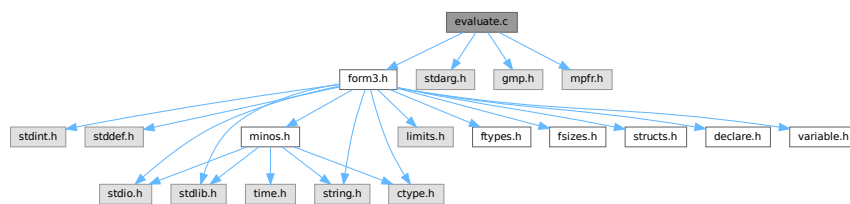

Macros

- `#define EXTRAPRECISION 4`
- `#define RND MPFR_RNDN`
- `#define auxr1 (((mpfr_t *) (AT.auxr_))[0])`
- `#define auxr2 (((mpfr_t *) (AT.auxr_))[1])`
- `#define auxr3 (((mpfr_t *) (AT.auxr_))[2])`
- `#define auxr4 (((mpfr_t *) (AT.auxr_))[3])`
- `#define auxr5 (((mpfr_t *) (AT.auxr_))[4])`

Functions

- `int PackFloat (WORD *, mpfr_t)`
- `int UnpackFloat (mpfr_t, WORD *)`
- `void RatToFloat (mpfr_t, UWORD *, int)`
- `void FormtoZ (mpz_t, UWORD *, WORD)`
- `void IntegerToFloat (mpfr_t result, UWORD *formlong, int longsize)`
- `void RatToFloat (mpfr_t result, UWORD *formrat, int ratsize)`
- `void SetFloatPrecision (LONG prec)`
- `void ClearFloat (void)`
- `int GetFloatArgument (PHEAD mpfr_t f_out, WORD *fun, int par)`
- `int GetPiArgument (PHEAD WORD *arg)`
- `int EvaluateFun (PHEAD WORD *term, WORD level, WORD *pars)`

Variables

- `mpf_t ln2`

4.29.1 Detailed Description

Evaluation of functions for the floating-point system, by interfacing with MPFR.

Definition in file [evaluate.c](#).

4.29.2 Macro Definition Documentation

4.29.2.1 EXTRAPRECISION

```
#define EXTRAPRECISION 4
```

Definition at line 40 of file [evaluate.c](#).

4.29.2.2 RND

```
#define RND MPFR_RNDN
```

Definition at line 42 of file [evaluate.c](#).

4.29.2.3 auxr1

```
#define auxr1 (((mpfr_t *) (AT.auxr_)) [0])
```

Definition at line 44 of file [evaluate.c](#).

4.29.2.4 auxr2

```
#define auxr2 (((mpfr_t *) (AT.auxr_)) [1])
```

Definition at line 45 of file [evaluate.c](#).

4.29.2.5 auxr3

```
#define auxr3 (((mpfr_t *) (AT.auxr_)) [2])
```

Definition at line 46 of file [evaluate.c](#).

4.29.2.6 auxr4

```
#define auxr4 (((mpfr_t *) (AT.auxr_)) [3])
```

Definition at line 47 of file [evaluate.c](#).

4.29.2.7 auxr5

```
#define auxr5 ((mpfr_t *) (AT.auxr_))[4])
```

Definition at line 48 of file [evaluate.c](#).

4.29.3 Function Documentation

4.29.3.1 PackFloat()

```
int PackFloat (
    WORD * fun,
    mpf_t infloat )
```

Definition at line 271 of file [float.c](#).

4.29.3.2 UnpackFloat()

```
int UnpackFloat (
    mpf_t outfloat,
    WORD * fun )
```

Definition at line 366 of file [float.c](#).

4.29.3.3 RatToFloat()

```
void RatToFloat (
    mpf_t result,
    UWORD * formrat,
    int ratsize )
```

Definition at line 622 of file [float.c](#).

4.29.3.4 FormtoZ()

```
void FormtoZ (
    mpz_t z,
    UWORD * a,
    WORD na )
```

Definition at line 513 of file [float.c](#).

4.29.3.5 IntegerToFloatr()

```
void IntegerToFloatr (
    mpfr_t result,
    UWORD * formlong,
    int longsize )
```

Definition at line 66 of file [evaluate.c](#).

4.29.3.6 RatToFloatr()

```
void RatToFloatr (
    mpfr_t result,
    UWORD * format,
    int ratsize )
```

Definition at line 82 of file [evaluate.c](#).

4.29.3.7 SetFloatPrecision()

```
void SetFloatPrecision (
    LONG prec )
```

Definition at line 109 of file [evaluate.c](#).

4.29.3.8 ClearFloat()

```
void ClearFloat (
    void )
```

Definition at line 142 of file [evaluate.c](#).

4.29.3.9 GetFloatArgument()

```
int GetFloatArgument (
    PHEAD mpfr_t f_out,
    WORD * fun,
    int par )
```

Definition at line 181 of file [evaluate.c](#).

4.29.3.10 GetPiArgument()

```
int GetPiArgument (
    PHEAD WORD * arg )
```

Definition at line 276 of file [evaluate.c](#).

4.29.3.11 EvaluateFun()

```
int EvaluateFun (
    PHEAD WORD * term,
    WORD level,
    WORD * pars )
```

Definition at line 369 of file [evaluate.c](#).

4.29.4 Variable Documentation

4.29.4.1 ln2

mpf_t ln2

Definition at line 50 of file [evaluate.c](#).

4.30 evaluate.c

[Go to the documentation of this file.](#)

```

00001
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 *   When using this file you are requested to refer to the publication
00009 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 *   This is considered a matter of courtesy as the development was paid
00011 *   for by FOM the Dutch physics granting agency and we would like to
00012 *   be able to track its scientific use to convince FOM of its value
00013 *   for the community.
00014 *
00015 *   This file is part of FORM.
00016 *
00017 *   FORM is free software: you can redistribute it and/or modify it under the
00018 *   terms of the GNU General Public License as published by the Free Software
00019 *   Foundation, either version 3 of the License, or (at your option) any later
00020 *   version.
00021 *
00022 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 *   details.
00026 *
00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[ License : */
00031 /*
00032    #[ includes :
00033 */
00034
00035 #include "form3.h"
00036 #include <stdarg.h>
00037 #include <gmp.h>
00038 #include <mpfr.h>
00039
00040 #define EXTRAPRECISION 4
00041
00042 #define RND MPFR_RNDN
00043
00044 #define auxr1 (((mpfr_t *) (AT.auxr_))[0])
00045 #define auxr2 (((mpfr_t *) (AT.auxr_))[1])
00046 #define auxr3 (((mpfr_t *) (AT.auxr_))[2])
00047 #define auxr4 (((mpfr_t *) (AT.auxr_))[3])
00048 #define auxr5 (((mpfr_t *) (AT.auxr_))[4])
00049
00050 mpf_t ln2;
00051
00052 int PackFloat(WORD *, mpf_t);
00053 int UnpackFloat(mpf_t, WORD *);
00054 void RatToFloat(mpf_t, UWORD *, int);
00055 void FormtoZ(mpf_t, UWORD *, WORD);
00056
00057 /*
00058    #[ includes :
00059    #[ mpfr_ :
00060        #[ IntegerToFloatr :
00061
00062        Converts a Form long integer to a mpfr_ float of default size.
00063        We assume that sizeof(unsigned long int) = 2*sizeof(UWORD).
00064 */
00065
00066 void IntegerToFloatr(mpf_t result, UWORD *formlong, int longsize)
00067 {
00068     mpz_t z;
00069     mpz_init(z);

```

```

00070     FormtoZ(z,formlong,longsize);
00071     mpfr_set_z(result,z,RND);
00072     mpz_clear(z);
00073 }
00074
00075 /*
00076     #] IntegerToFloat :
00077     #[ RatToFloat :
00078
00079     Converts a Form rational to a gmp float of default size.
00080 */
00081
00082 void RatToFloat(mpfr_t result, UWORD *formrat, int ratsize)
00083 {
00084     GETIDENTITY
00085     int nnum, nden;
00086     UWORD *num, *den;
00087     int sgn = 0;
00088     if ( ratsize < 0 ) { ratsize = -ratsize; sgn = 1; }
00089     nnum = nden = (ratsize-1)/2;
00090     num = formrat; den = formrat+nnum;
00091     while ( nnum > 1 && num[nnum-1] == 0 ) { nnum--; }
00092     while ( nden > 1 && den[nden-1] == 0 ) { nden--; }
00093     IntegerToFloat(auxr4,num,nnum);
00094     IntegerToFloat(auxr5,den,nden);
00095     mpfr_div(result,auxr4,auxr5,RND);
00096     if ( sgn > 0 ) mpfr_neg(result,result,RND);
00097 }
00098
00099 /*
00100     #] RatToFloat :
00101     #[ SetFloatPrecision :
00102
00103     The AC.DefaultPrecision is in bits.
00104     prec is in limbs.
00105     fprec is NOT in bits for mpfr_ which is slightly less than in mpf_
00106     We also set the auxr1,auxr2,auxr3,auxr4,auxr5 variables.
00107 */
00108
00109 void SetFloatPrecision(LONG prec)
00110 {
00111     /*
00112     mpfr_prec_t fprec = prec * mp_bits_per_limb - EXTRAPRECISION;
00113     */
00114     mpfr_prec_t fprec = prec + 1;
00115     mpfr_set_default_prec(fprec);
00116     #ifdef WITHPTHREADS
00117     int totnum = AM.totalnumberofthreads, id;
00118     mpfr_t *a;
00119     #ifdef WITHSORTBOTS
00120     totnum = MaX(2*AM.totalnumberofthreads-3,AM.totalnumberofthreads);
00121     #endif
00122     for ( id = 0; id < totnum; id++ ) {
00123         AB[id]->T.auxr_ = (void *)Malloca(sizeof(mpfr_t)*5,"AB[id]->T.auxr_");
00124         a = (mpfr_t *)AB[id]->T.auxr_;
00125     /*
00126         We work here with a[0] etc because the aux1 etc contain B which
00127         in the current routine would be AB[0] only
00128     */
00129     mpfr_inits2(fprec,a[0],a[1],a[2],a[3],a[4],(mpfr_ptr)0);
00130     }
00131     #else
00132     AT.auxr_ = (void *)Malloca(sizeof(mpfr_t)*5,"AT.auxr_");
00133     mpfr_inits2(fprec,auxr1,auxr2,auxr3,auxr4,auxr5,(mpfr_ptr)0);
00134     #endif
00135 }
00136
00137 /*
00138     #] SetFloatPrecision :
00139     #[ ClearFloat :
00140 */
00141
00142 void ClearFloat(void)
00143 {
00144     #ifdef WITHPTHREADS
00145     int totnum = AM.totalnumberofthreads, id;
00146     mpfr_t *a;
00147     #ifdef WITHSORTBOTS
00148     totnum = MaX(2*AM.totalnumberofthreads-3,AM.totalnumberofthreads);
00149     #endif
00150     if ( AB[0]->T.auxr_ ) {
00151         for ( id = 0; id < totnum; id++ ) {
00152             a = (mpfr_t *)AB[id]->T.auxr_;
00153             mpfr_clears(a[0],a[1],a[2],a[3],a[4],(mpfr_ptr)0);
00154             M_free(AB[id]->T.auxr_,"AB[id]->T.auxr_");
00155             AB[id]->T.auxr_ = 0;
00156         }

```

```

00157     }
00158 #else
00159     if ( AT.auxr_ ) {
00160         mpfr_clears(auxr1,auxr2,auxr3,auxr4,auxr5,(mpfr_ptr)0);
00161         M_free(AT.auxr_,"AT.auxr_");
00162         AT.auxr_ = 0;
00163     }
00164 #endif
00165 }
00166
00167 /*
00168     #] ClearfFloat :
00169     #[ GetFloatArgument :
00170
00171     Convert an argument to an mpfr float if possible.
00172     Return value: 0: was converted successfully.
00173                 -1: could not convert.
00174     Note: arguments with more than one term should be evaluated first
00175     inside an Argument environment. If there is still more than one
00176     term remaining we get the code: "could not convert".
00177     par tells which argument we need. If it is negative it should also
00178     be the last argument.
00179 */
00180
00181 int GetFloatArgument(PHEAD mpfr_t f_out,WORD *fun,int par)
00182 {
00183     WORD *term, *tn, *t, *tstop, first, ncoef, *arg, *argp, abspar;
00184     arg = fun+FUNHEAD;
00185     abspar = ABS(par);
00186     while ( arg < fun+fun[1] && abspar > 1 ) { abspar--; NEXTARG(arg) }
00187     if ( arg >= fun+fun[1] || abspar != 1 ) return(-1);
00188     if ( par < 0 ) {
00189         argp = arg; NEXTARG(argp); if ( argp != fun+fun[1] ) return(-1);
00190     }
00191     if ( *arg < 0 ) {
00192         if ( *arg == -SNUMBER ) {
00193             mpfr_set_si(f_out,(LONG)(arg[1]),RND);
00194         }
00195         else if ( *arg == -SYMBOL && ( arg[1] == PISYMBOL ) ) {
00196             mpfr_const_pi(f_out,RND);
00197         }
00198         else if ( *arg == -INDEX && arg[1] >= 0 && arg[1] < AM.OffsetIndex ) {
00199             mpfr_set_ui(f_out,(ULONG)(arg[1]),RND);
00200         }
00201         else { return(-1); }
00202         return(0);
00203     }
00204     else if ( arg[0] != arg[ARGHEAD]+ARGHEAD ) { /* more than one term */
00205         return(-1);
00206     }
00207     term = arg+ARGHEAD;
00208     tn = term+*term;
00209     tstop = tn-ABS(tn[-1]);
00210     t = term+1;
00211     first = 1;
00212     while ( t <= tstop ) {
00213         if ( t == tstop ) { /* Fraction */
00214             if ( first ) RatToFloat(f_out,(UWORD *)tstop,tn[-1]);
00215             else {
00216                 RatToFloat(auxr4,(UWORD *)tstop,tn[-1]);
00217                 mpfr_mul(f_out,f_out,auxr4,RND);
00218             }
00219             return(0);
00220         }
00221         else if ( *t == FLOATFUN ) {
00222             if ( t+t[1] != tstop ) return(-1);
00223             if ( UnpackFloat(aux5,t) < 0 ) return(-1);
00224             if ( first ) {
00225                 mpfr_set_f(f_out,aux5,RND);
00226                 first = 0;
00227             }
00228             else {
00229                 mpfr_set_f(auxr4,aux5,RND);
00230                 mpfr_mul(f_out,f_out,auxr4,RND);
00231             }
00232             first = 0;
00233             if ( tn[-1] < 0 ) { /* change sign */
00234                 ncoef = -tn[-1];
00235                 mpfr_neg(f_out,f_out,RND);
00236             }
00237             else ncoef = tn[-1];
00238             if ( ncoef == 3 && tn[-2] == 1 && tn[-3] == 1 ) return(0);
00239         }
00240         /*
00241         If the argument was properly normalized we are not supposed to come here.
00242         */
00243         MLOCK(ErrorMessageLock);
00244         MesPrint("Unnormalized argument in GetFloatArgument: %a",*term,term);

```

```

00244         MUNLOCK(ErrorMessageLock);
00245         Terminate(-1);
00246     }
00247     else if ( t[0] == SYMBOL && t[1] == 4 && t[2] == PISYMBOL && t[3] == 1 ) {
00248         if ( first ) {
00249             mpfr_const_pi(f_out,RND);
00250             first = 0;
00251         }
00252         else {
00253             mpfr_const_pi(auxr5,RND);
00254             mpfr_mul(f_out,f_out,auxr5,RND);
00255         }
00256     }
00257     else { /* This we do not / cannot do */
00258         return(-1);
00259     }
00260     t += t[1];
00261 }
00262 return(0);
00263 }
00264
00265 /*
00266     #] GetFloatArgument :
00267     #[ GetPiArgument :
00268
00269     Tests for sin,cos,tan whether the argument is a simple
00270     multiple of pi or can be reduced to such.
00271     Return value: -1: the answer is no.
00272     0-23: we have 0, 1/12*pi_,...,23/12*pi_
00273     With success most values can be worked out by simple means.
00274 */
00275
00276 int GetPiArgument(PHEAD WORD *arg)
00277 {
00278     UWORD *coef, *co, *tco, twelve, *number, *denom, *c, *d;
00279     WORD i, ii, i2, iflip, nc, nd, *t, *tn, *tstop;
00280     int rem;
00281
00282     /*
00283     One: determine whether there is a rational coefficient and a pi_
00284     */
00285     if ( *arg == -SNUMBER && arg[1] == 0 ) return(0);
00286     if ( *arg == -SYMBOL && arg[1] == PISYMBOL ) return(12);
00287     if ( *arg < 0 ) return(-1);
00288     if ( arg[ARGHEAD] != *arg-ARGHEAD ) return(-1);
00289     t = arg+ARGHEAD+1;
00290     tn = arg+*arg; tstop = tn - ABS(tn[-1]);
00291     if ( *t != SYMBOL || t[1] != 4 || t[2] != PISYMBOL || t[3] != 1
00292         || t+t[1] != tstop ) return(-1);
00293     /*
00294     The denominator must be a divisor of 12
00295     1: copy the coefficient
00296     */
00297     co = coef = NumberMalloc("GetPiArgument");
00298     tco = (UWORD *)tstop;
00299     i = tn[-1]; if ( i < 0 ) { i = -i; iflip = 1; } else iflip = 0;
00300     ii = (i-1)/2;
00301     twelve = 12;
00302     NCOPY(co,tco,i);
00303     co = coef;
00304     Mully(BHEAD co,&ii,&twelve,1);
00305     /*
00306     Now the denominator should be 1
00307     */
00308     i = ii; i2 = i-1;
00309     number = co; denom = number + i;
00310     if ( i > 1 ) {
00311         while ( i2 > 0 ) {
00312             if ( denom[i2--] != 0 ) {
00313                 NumberFree(co,"GetPiArgument");
00314                 return(-1);
00315             }
00316         }
00317     }
00318     if ( *denom != 1 ) {
00319         NumberFree(co,"GetPiArgument");
00320         return(-1);
00321     }
00322     /*
00323     Now we need the numerator modulus 24.
00324     */
00325     if ( i == 1 ) {
00326         rem = *number % 24;
00327     }
00328     else {
00329         c = NumberMalloc("GetPiArgument");
00330         d = NumberMalloc("GetPiArgument");
00331         twelve *= 2;

```

```

00331     DivLong(number,i,&twelve,1,c,&nc,d,&nd);
00332     rem = *d % 24;
00333     NumberFree(d,"GetPiArgument");
00334     NumberFree(c,"GetPiArgument");
00335 }
00336 NumberFree(co,"GetPiArgument");
00337 if ( iflip && rem != 0 ) rem = 24-rem;
00338 return(rem);
00339 }
00340
00341 /*
00342     #] GetPiArgument :
00343     #[ EvaluateFun :
00344
00345     What we need to do is:
00346     1: look for a function to be treated.
00347     2: make sure its argument is treatable.
00348     3: call the proper mpfr_ function.
00349     4: accumulate the result.
00350     For some functions we have to insert 'smart' shortcuts as is
00351     the case with sin_(pi_) or sin_(pi_/6) of sqrt(4/9) etc.
00352     Otherwise we may have to insert a value for pi_ first.
00353     There are several types of arguments:
00354     a: (short) integers.
00355     b: rationals.
00356     c: floats.
00357     We accumulate the result(s) in auxr2. The argument comes in aux5
00358     and a result in auxr3 which then gets multiplied into auxr2.
00359     In the end we have to combine auxr2 with whatever coefficient
00360     existed already.
00361
00362     When the float system is started we need for aux only 3 variables
00363     per thread. auxr1-auxr3. This should be done separately.
00364     The main problem is the conversion of mpfr_t to float_ and/or mpf_t
00365     and back.
00366 */
00367
00368 int EvaluateFun(PHEAD WORD *term, WORD level, WORD *pars)
00369 {
00370     WORD *t, *tstop, *tt, *tnext, *newterm, i;
00371     WORD *oldworkpointer = AT.WorkPointer, nsize, nsgn, nsgn2;
00372     int retval = 0, first = 1, pimul;
00373
00374     tstop = term + *term; tstop -= ABS(tstop[-1]);
00375     if ( AT.WorkPointer < term+*term ) AT.WorkPointer = term + *term;
00376     t = term+1;
00377     mpfr_set_ui(auxr2,1L,RND);
00378     while ( t < tstop ) {
00379         if ( pars[2] == *t ) { /* have to do this one if possible */
00380             TestArgument:
00381             /*
00382                 There must be a single argument, except for the AGM or atan2 functions
00383             */
00384             tnext = t+t[1]; tt = t+FUNHEAD; NEXTARG(tt);
00385             if( *t == SYMBOL ) {
00386                 for ( WORD* ti = t+2; ti < t+t[1]; ti+=2 ) {
00387                     if( ( *ti == PISYMBOL || *ti == EESYMBOL || *ti == EMSYMBOL )
00388                         && ( pars[2] == ALLFUNCTIONS || pars[3] == *ti ) ) {
00389                         if ( *ti == PISYMBOL )
00390                             mpfr_const_pi(auxr3,RND);
00391                         else if ( *ti == EESYMBOL ) {
00392                             mpfr_set_ui(auxr3,1,RND);
00393                             mpfr_exp(auxr3,auxr3,RND);
00394                         }
00395                         else if ( *ti == EMSYMBOL )
00396                             mpfr_const_euler(auxr3,RND);
00397                         if ( ti[1] != 1 )
00398                             mpfr_pow_si(auxr3,auxr3,ti[1],RND);
00399                         mpfr_mul(auxr2,auxr2,auxr3,RND);
00400                         ti[1] = 0;
00401                         first = 0;
00402                     }
00403                 }
00404                 goto nextfun;
00405             }
00406             if ( tt != tnext && *t != AGMFUNCTION && *t != ATAN2FUNCTION ) goto nextfun;
00407             if ( *t == SINFUNCTION ) {
00408                 pimul = GetPiArgument(BHEAD t+FUNHEAD);
00409                 if ( pimul >= 0 && pimul < 24 ) {
00410                     if ( pimul == 0 || pimul == 12 ) goto getout;
00411                     if ( pimul > 12 ) { pimul = 24-pimul; nsgn = -1; }
00412                     else nsgn = 1;
00413                     if ( pimul > 6 ) pimul = 12-pimul;
00414                     switch ( pimul ) {
00415                         case 1:
00416                             label1:

```



```

00418             mpfr_sqrt_ui (auxr3, 3L, RND);
00419             mpfr_sub_ui (auxr3, auxr3, 1L, RND);
00420             mpfr_sqrt_ui (auxr1, 2L, RND);
00421             mpfr_div_ui (auxr1, auxr1, 4L, RND);
00422             mpfr_mul (auxr3, auxr3, auxr1, RND);
00423             if ( nsgn < 0 ) mpfr_neg (auxr3, auxr3, RND);
00424             mpfr_mul (auxr2, auxr2, auxr3, RND);
00425             break;
00426         case 2:
00427 label2:
00428             mpfr_div_ui (auxr2, auxr2, 2L, RND);
00429             if ( nsgn < 0 ) mpfr_neg (auxr2, auxr2, RND);
00430             break;
00431         case 3:
00432 label3:
00433             mpfr_sqrt_ui (auxr3, 2L, RND);
00434             mpfr_div_ui (auxr3, auxr3, 2L, RND);
00435             if ( nsgn < 0 ) mpfr_neg (auxr3, auxr3, RND);
00436             mpfr_mul (auxr2, auxr2, auxr3, RND);
00437             break;
00438         case 4:
00439 label4:
00440             mpfr_sqrt_ui (auxr3, 3L, RND);
00441             mpfr_div_ui (auxr3, auxr3, 2L, RND);
00442             if ( nsgn < 0 ) mpfr_neg (auxr3, auxr3, RND);
00443             mpfr_mul (auxr2, auxr2, auxr3, RND);
00444             break;
00445         case 5:
00446 label5:
00447             mpfr_sqrt_ui (auxr3, 3L, RND);
00448             mpfr_add_ui (auxr3, auxr3, 1L, RND);
00449             mpfr_sqrt_ui (auxr1, 2L, RND);
00450             mpfr_div_ui (auxr1, auxr1, 4L, RND);
00451             mpfr_mul (auxr3, auxr3, auxr1, RND);
00452             if ( nsgn < 0 ) mpfr_neg (auxr3, auxr3, RND);
00453             mpfr_mul (auxr2, auxr2, auxr3, RND);
00454             break;
00455         case 6:
00456 label6:
00457             if ( nsgn < 0 ) mpfr_neg (auxr2, auxr2, RND);
00458             break;
00459     }
00460     *t = 0; first = 0;
00461     goto nextfun;
00462 }
00463 }
00464 else if ( *t == COSFUNCTION ) {
00465     pimul = GetPiArgument (BHEAD t+FUNHEAD);
00466     if ( pimul >= 0 && pimul < 24 ) {
00467         if ( pimul > 12 ) pimul = 24-pimul;
00468         if ( pimul > 6 ) { pimul = 12-pimul; nsgn = -1; }
00469         else nsgn = 1;
00470         if ( pimul == 6 ) goto getout;
00471         switch ( pimul ) {
00472             case 0: goto label6;
00473             case 1: goto label5;
00474             case 2: goto label4;
00475             case 3: goto label3;
00476             case 4: goto label2;
00477             case 5: goto label1;
00478         }
00479     }
00480 }
00481 else if ( *t == TANFUNCTION ) {
00482     pimul = GetPiArgument (BHEAD t+FUNHEAD);
00483     if ( pimul >= 0 && pimul < 24 ) {
00484         if ( pimul == 6 || pimul == 18 ) goto nextfun;
00485         if ( pimul == 0 || pimul == 12 ) goto getout;
00486         if ( pimul > 12 ) { pimul = 24-pimul; nsgn = -1; }
00487         else nsgn = 1;
00488         if ( pimul > 6 ) { pimul = 12-pimul; nsgn = -nsgn; }
00489         switch ( pimul ) {
00490             case 1:
00491                 mpfr_sqrt_ui (auxr3, 3L, RND);
00492                 mpfr_sub_ui (auxr3, auxr3, 2L, RND);
00493                 if ( nsgn > 0 ) mpfr_neg (auxr3, auxr3, RND);
00494                 mpfr_mul (auxr2, auxr2, auxr3, RND);
00495                 break;
00496             case 2:
00497                 mpfr_sqrt_ui (auxr3, 3L, RND);
00498                 mpfr_div_ui (auxr3, auxr3, 3L, RND);
00499                 if ( nsgn < 0 ) mpfr_neg (auxr3, auxr3, RND);
00500                 mpfr_mul (auxr2, auxr2, auxr3, RND);
00501                 break;
00502             case 3:
00503                 break;
00504             case 4:

```

```

00505             mpfr_sqrt_ui(auxr3, 3L, RND);
00506             if ( nsgn < 0 ) mpfr_neg(auxr3, auxr3, RND);
00507             mpfr_mul(auxr2, auxr2, auxr3, RND);
00508             break;
00509         case 5:
00510             mpfr_sqrt_ui(auxr3, 3L, RND);
00511             mpfr_add_ui(auxr3, auxr3, 2L, RND);
00512             if ( nsgn < 0 ) mpfr_neg(auxr3, auxr3, RND);
00513             mpfr_mul(auxr2, auxr2, auxr3, RND);
00514             break;
00515     }
00516     *t = 0; first = 0;
00517     goto nextfun;
00518 }
00519 }
00520
00521 if ( *t == AGMFUNCTION || *t == ATAN2FUNCTION ) {
00522     if ( GetFloatArgument(BHEAD auxr1, t, 1) < 0 ) goto nextfun;
00523     if ( GetFloatArgument(BHEAD auxr3, t, -2) < 0 ) goto nextfun;
00524 }
00525 else if ( GetFloatArgument(BHEAD auxr1, t, -1) < 0 ) goto nextfun;
00526 nsgn = mpfr_sgn(auxr1);
00527
00528 switch ( *t ) {
00529     case SQRTFUNCTION:
00530         if ( nsgn < 0 ) goto nextfun;
00531         if ( nsgn == 0 ) goto getout;
00532         else mpfr_sqrt(auxr3, auxr1, RND);
00533         mpfr_mul(auxr2, auxr2, auxr3, RND);
00534         break;
00535     case LNFUNCTION:
00536         if ( nsgn <= 0 ) goto nextfun;
00537         if ( mpfr_cmp_ui(auxr1, 1L) == 0 ) goto getout;
00538         else mpfr_log(auxr3, auxr1, RND);
00539         mpfr_mul(auxr2, auxr2, auxr3, RND);
00540         break;
00541     case EXPFUNCTION:
00542         mpfr_exp(auxr3, auxr1, RND);
00543         mpfr_mul(auxr2, auxr2, auxr3, RND);
00544         break;
00545     case LI2FUNCTION: /* should be between -1 and +1 */
00546         if ( nsgn == 0 ) goto getout;
00547         mpfr_abs(auxr3, auxr1, RND);
00548         if ( mpfr_cmp_ui(auxr3, 1L) > 0 ) goto nextfun;
00549         mpfr_li2(auxr3, auxr1, RND);
00550         mpfr_mul(auxr2, auxr2, auxr3, RND);
00551         break;
00552     case GAMMAFUN:
00553 /*
00554         We cannot do this when the argument is a non-positive integer
00555 */
00556         if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] <= 0 ) goto nextfun;
00557         if ( t[FUNHEAD] == t[1]-FUNHEAD && ABS(t[t[1]-1]) ==
00558             t[FUNHEAD]-ARGHEAD-1 && t[t[1]-1] < 0 ) {
00559             nsize = (-t[t[1]-1]-1)/2;
00560             if ( t[t[1]-1-nsize] == 1 ) {
00561                 for ( i = 1; i < nsize; i++ ) {
00562                     if ( t[t[1]-1-nsize+i] != 0 ) break;
00563                 }
00564                 if ( i >= nsize ) goto nextfun;
00565             }
00566         }
00567         mpfr_gamma(auxr3, auxr1, RND);
00568         mpfr_mul(auxr2, auxr2, auxr3, RND);
00569         break;
00570     case AGMFUNCTION:
00571         nsgn = mpfr_sgn(auxr1);
00572         nsgn2 = mpfr_sgn(auxr3);
00573         if ( nsgn == 0 || nsgn2 == 0 ) goto getout;
00574         if ( nsgn < 0 || nsgn2 < 0 ) goto nextfun;
00575         mpfr_agm(auxr3, auxr1, auxr3, RND);
00576         mpfr_mul(auxr2, auxr2, auxr3, RND);
00577         break;
00578     case SINHFUNCTION:
00579         if ( nsgn == 0 ) goto getout;
00580         mpfr_sinh(auxr3, auxr1, RND);
00581         mpfr_mul(auxr2, auxr2, auxr3, RND);
00582         break;
00583     case COSHFUNCTION:
00584         mpfr_cosh(auxr3, auxr1, RND);
00585         mpfr_mul(auxr2, auxr2, auxr3, RND);
00586         break;
00587     case TANHFUNCTION:
00588         if ( nsgn == 0 ) goto getout;
00589         mpfr_tanh(auxr3, auxr1, RND);
00590         mpfr_mul(auxr2, auxr2, auxr3, RND);
00591         break;

```

```

00592         case ASINHFUNCTION:
00593             if ( nsgn == 0 ) goto getout;
00594             mpfr_asinh(auxr3,auxr1,RND);
00595             mpfr_mul(auxr2,auxr2,auxr3,RND);
00596         break;
00597         case ACOSHFUNCTION:
00598             if ( mpfr_cmp_ui(auxr1,1L) < 0 ) goto nextfun;
00599             if ( mpfr_cmp_ui(auxr1,1L) == 0 ) goto getout;
00600             mpfr_acosh(auxr3,auxr1,RND);
00601             mpfr_mul(auxr2,auxr2,auxr3,RND);
00602         break;
00603         case ATANHFUNCTION:
00604             if ( nsgn == 0 ) goto getout;
00605             mpfr_abs(auxr3,auxr1,RND);
00606             if ( mpfr_cmp_ui(auxr3,1L) >= 0 ) goto nextfun;
00607             mpfr_atanh(auxr3,auxr1,RND);
00608             mpfr_mul(auxr2,auxr2,auxr3,RND);
00609         break;
00610         case ASINFUNCTION:
00611             if ( nsgn == 0 ) goto getout;
00612             mpfr_abs(auxr3,auxr1,RND);
00613             if ( mpfr_cmp_ui(auxr3,1L) > 0 ) goto nextfun;
00614             mpfr_asin(auxr3,auxr1,RND);
00615             mpfr_mul(auxr2,auxr2,auxr3,RND);
00616         break;
00617         case ACOSFUNCTION:
00618             if ( mpfr_cmp_ui(auxr1,1L) == 0 ) goto getout;
00619             mpfr_abs(auxr3,auxr1,RND);
00620             if ( mpfr_cmp_ui(auxr3,1L) > 0 ) goto nextfun;
00621             mpfr_acos(auxr3,auxr1,RND);
00622             mpfr_mul(auxr2,auxr2,auxr3,RND);
00623         break;
00624         case ATANFUNCTION:
00625             if ( nsgn == 0 ) goto getout;
00626             mpfr_atan(auxr3,auxr1,RND);
00627             mpfr_mul(auxr2,auxr2,auxr3,RND);
00628         break;
00629         case ATAN2FUNCTION:
00630             nsgn = mpfr_sgn(auxr1);
00631             nsgn2 = mpfr_sgn(auxr3);
00632             // We follow the conventions of mpfr here:
00633             if ( nsgn == 0 && nsgn2 >= 0 ) goto getout;
00634             mpfr_atan2(auxr3,auxr1,auxr3,RND);
00635             mpfr_mul(auxr2,auxr2,auxr3,RND);
00636         break;
00637         case SINFUNCTION:
00638             mpfr_sin(auxr3,auxr1,RND);
00639             mpfr_mul(auxr2,auxr2,auxr3,RND);
00640         break;
00641         case COSFUNCTION:
00642             mpfr_cos(auxr3,auxr1,RND);
00643             mpfr_mul(auxr2,auxr2,auxr3,RND);
00644         break;
00645         case TANFUNCTION:
00646             mpfr_tan(auxr3,auxr1,RND);
00647             mpfr_mul(auxr2,auxr2,auxr3,RND);
00648         break;
00649         default:
00650             goto nextfun;
00651         break;
00652     }
00653     first = 0;
00654     *t = 0;
00655     goto nextfun;
00656 }
00657 else if ( pars[2] == ALLFUNCTIONS ) {
00658     /*
00659         Now we have to test whether this is one of our functions
00660     */
00661     if ( t[1] == FUNHEAD ) goto nextfun;
00662     switch ( *t ) {
00663         case SQRTFUNCTION:
00664         case LNFUNCTION:
00665         case LI2FUNCTION:
00666         case LINFUNCTION:
00667         case EXPFUNCTION:
00668         case ASINFUNCTION:
00669         case ACOSFUNCTION:
00670         case ATANFUNCTION:
00671         case ATAN2FUNCTION:
00672         case SINHFUNCTION:
00673         case COSHFUNCTION:
00674         case TANHFUNCTION:
00675         case ASINHFUNCTION:
00676         case ACOSHFUNCTION:
00677         case ATANHFUNCTION:
00678         case SINFUNCTION:

```

```


00679             case COSFUNCTION:
00680             case TANFUNCTION:
00681             case AGMFUNCTION:
00682             case SYMBOL:
00683                 goto TestArgument;
00684             case MZV:
00685             case EULER:
00686             case MZVHALF:
00687             default:
00688                 goto nextfun;
00689         }
00690     }
00691     else goto nextfun;
00692 nextfun:
00693     t += t[1];
00694 }
00695 if ( first == 1 ) return(Generator(BHEAD term,level));
00696 mpfr_get_f(aux4,auxr2,RND);
00697 /*
00698 Step 3:
00699 Now the regular coefficient, if it is not 1/1.
00700 We have two cases: size +- 3, or bigger.
00701 */
00702
00703 nsize = term[*term-1];
00704 if ( nsize < 0 ) { nsize = -nsize; nsgn = -1; }
00705 else nsgn = 1;
00706 if ( aux4->_mp_size < 0 ) {
00707     aux4->_mp_size = -aux4->_mp_size;
00708     nsgn = -nsgn;
00709 }
00710
00711 if ( nsize == 3 ) {
00712     if ( tstop[0] != 1 ) {
00713         mpf_mul_ui(aux4,aux4,(ULONG)((UWORD)tstop[0]));
00714     }
00715     if ( tstop[1] != 1 ) {
00716         mpf_div_ui(aux4,aux4,(ULONG)((UWORD)tstop[1]));
00717     }
00718 }
00719 else {
00720     RatToFloat(aux5,(UWORD *)tstop,nsize);
00721     mpf_mul(aux4,aux4,aux5);
00722 }
00723 /*
00724 Now we have to locate possible other float_ functions.
00725 Note possible incompatibilities between the mpf and mpfr formats.
00726 */
00727 t = term+1;
00728 while ( t < tstop ) {
00729     if ( *t == FLOATFUN ) {
00730         UnpackFloat(aux5,t);
00731         mpf_mul(aux4,aux4,aux5);
00732     }
00733     t += t[1];
00734 }
00735 /*
00736 Now we should compose the new term in the Workspace.
00737 */
00738 t = term+1;
00739 newterm = AT.WorkPointer;
00740 tt = newterm+1;
00741 while ( t < tstop ) {
00742     if ( *t == 0 || *t == FLOATFUN ) t += t[1];
00743     else {
00744         i = t[1]; NCOPY(tt,t,i);
00745     }
00746 }
00747 PackFloat(tt,aux4);
00748 tt += tt[1];
00749 *tt++ = 1; *tt++ = 1; *tt++ = 3*nsgn;
00750 *newterm = tt-newterm;
00751 AT.WorkPointer = tt;
00752 retval = Generator(BHEAD newterm,level);
00753 getout:
00754 AT.WorkPointer = oldworkpointer;
00755 return(retval);
00756 }
00757
00758 /*
00759 #] EvaluateFun :
00760 #] mpfr_ :
00761 */

```

4.31 execute.c File Reference

```
#include "form3.h"
```

Include dependency graph for execute.c:

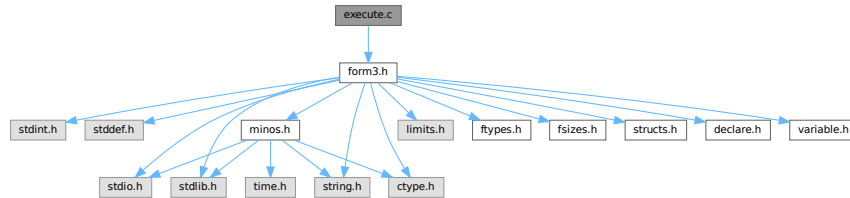

Macros

- `#define` [CURRENTBRACKET](#) 1
- `#define` [BRACKETCURRENTEXPR](#) 2
- `#define` [BRACKETOTHEREXPR](#) 3
- `#define` [NOBRACKETACTIVE](#) 4

Functions

- `int` [CleanExpr](#) (WORD par)
- `int` [PopVariables](#) (void)
- `void` [MakeGlobal](#) (void)
- `void` [TestDrop](#) (void)
- `void` [PutInVflags](#) (WORD nexpr)
- `int` [DoExecute](#) (WORD par, WORD skip)
- `int` [PutBracket](#) (PHEAD WORD *termin)
- `void` [SpecialCleanup](#) (PHEAD0)
- `void` [SetMods](#) (void)
- `void` [UnSetMods](#) (void)
- `void` [ExchangeExpressions](#) (int num1, int num2)
- `int` [GetFirstBracket](#) (WORD *term, int num)
- `int` [GetFirstTerm](#) (WORD *term, int num, int pre)
- `int` [GetContent](#) (WORD *content, int num)
- `int` [CleanupTerm](#) (WORD *term)
- `WORD` [ContentMerge](#) (PHEAD WORD *content, WORD *term)
- `LONG` [TermsInExpression](#) (WORD num)
- `LONG` [SizeOfExpression](#) (WORD num)
- `void` [UpdatePositions](#) (void)
- `LONG` [CountTerms1](#) (PHEAD0)
- `LONG` [TermsInBracket](#) (PHEAD WORD *term, WORD level)

4.31.1 Detailed Description

The routines that start the execution phase of a module. It also contains the routines for placing the bracket subterm.

Definition in file [execute.c](#).

4.31.2 Macro Definition Documentation

4.31.2.1 CURRENTBRACKET

```
#define CURRENTBRACKET 1
```

Definition at line [2564](#) of file [execute.c](#).

4.31.2.2 BRACKETCURRENTEXPR

```
#define BRACKETCURRENTEXPR 2
```

Definition at line [2565](#) of file [execute.c](#).

4.31.2.3 BRACKETOTHEREXPR

```
#define BRACKETOTHEREXPR 3
```

Definition at line [2566](#) of file [execute.c](#).

4.31.2.4 NOBRACKETACTIVE

```
#define NOBRACKETACTIVE 4
```

Definition at line [2567](#) of file [execute.c](#).

4.31.3 Function Documentation

4.31.3.1 CleanExpr()

```
int CleanExpr (  
    WORD par )
```

Definition at line [47](#) of file [execute.c](#).

4.31.3.2 PopVariables()

```
int PopVariables (  
    void )
```

Definition at line [211](#) of file [execute.c](#).

4.31.3.3 MakeGlobal()

```
void MakeGlobal (  
    void )
```

Definition at line [383](#) of file [execute.c](#).

4.31.3.4 TestDrop()

```
void TestDrop (
    void )
```

Definition at line 484 of file [execute.c](#).

4.31.3.5 PutInVflags()

```
void PutInVflags (
    WORD nexpr )
```

Definition at line 562 of file [execute.c](#).

4.31.3.6 DoExecute()

```
int DoExecute (
    WORD par,
    WORD skip )
```

Definition at line 616 of file [execute.c](#).

4.31.3.7 PutBracket()

```
int PutBracket (
    PHEAD WORD * termin )
```

Definition at line 1112 of file [execute.c](#).

4.31.3.8 SpecialCleanup()

```
void SpecialCleanup (
    PHEAD0 )
```

Definition at line 1624 of file [execute.c](#).

4.31.3.9 SetMods()

```
void SetMods (
    void )
```

Definition at line 1638 of file [execute.c](#).

4.31.3.10 UnSetMods()

```
void UnSetMods (
    void )
```

Definition at line 1656 of file [execute.c](#).

4.31.3.11 ExchangeExpressions()

```
void ExchangeExpressions (
    int num1,
    int num2 )
```

Definition at line [1671](#) of file [execute.c](#).

4.31.3.12 GetFirstBracket()

```
int GetFirstBracket (
    WORD * term,
    int num )
```

Definition at line [1745](#) of file [execute.c](#).

4.31.3.13 GetFirstTerm()

```
int GetFirstTerm (
    WORD * term,
    int num,
    int pre )
```

Gets the first term of an expression. Routine should be thread safe.

Parameters

out	<i>term</i>	Pointer to the buffer where the term should be written.
in	<i>num</i>	The expression number from which to get the term.
in	<i>pre</i>	Denotes a pre-processor call (1) or not (0). Used to determine the correct source file for the expression.

Returns

First WORD of term, a negative value denotes an error.

Definition at line [1864](#) of file [execute.c](#).

References [FiLe::handle](#), [VaRrEnUm::lo](#), and [ReNuMbEr::symb](#).

4.31.3.14 GetContent()

```
int GetContent (
    WORD * content,
    int num )
```

Definition at line [1972](#) of file [execute.c](#).

4.31.3.15 CleanupTerm()

```
int CleanupTerm (
    WORD * term )
```

Definition at line 2089 of file [execute.c](#).

4.31.3.16 ContentMerge()

```
WORD ContentMerge (
    PHEAD WORD * content,
    WORD * term )
```

Definition at line 2113 of file [execute.c](#).

4.31.3.17 TermsInExpression()

```
LONG TermsInExpression (
    WORD num )
```

Definition at line 2377 of file [execute.c](#).

4.31.3.18 SizeOfExpression()

```
LONG SizeOfExpression (
    WORD num )
```

Definition at line 2389 of file [execute.c](#).

4.31.3.19 UpdatePositions()

```
void UpdatePositions (
    void )
```

Definition at line 2401 of file [execute.c](#).

4.31.3.20 CountTerms1()

```
LONG CountTerms1 (
    PHEAD0 )
```

Definition at line 2461 of file [execute.c](#).

4.31.3.21 TermsInBracket()

```
LONG TermsInBracket (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 2569 of file [execute.c](#).

4.32 execute.c

[Go to the documentation of this file.](#)

```

00001
00006 /* #[] License : */
00007 /*
00008 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032 /*
00033 *   #[] Includes : execute.c
00034 */
00035
00036 #include "form3.h"
00037
00038 /*
00039 *   #[] Includes :
00040 *   #[] DoExecute :
00041 *   #[] CleanExpr :
00042
00043 *       par == 1 after .store or .clear
00044 *       par == 0 after .sort
00045 */
00046
00047 int CleanExpr(WORD par)
00048 {
00049     GETIDENTITY
00050     WORD j, n, i;
00051     POSITION length;
00052     EXPRESSIONS e_in, e_out, e;
00053     int numhid = 0;
00054     NAMENODE *node;
00055     n = NumExpressions;
00056     j = 0;
00057     e_in = e_out = Expressions;
00058     if ( n > 0 ) { do {
00059         e_in->vflags &= ~( TOBEFACTORED | TOBEUNFACTORED );
00060         if ( par ) {
00061             if ( e_in->renumlists ) {
00062                 if ( e_in->renumlists != AN.dummyrenumlist )
00063                     M_free(e_in->renumlists,"Renummer-lists");
00064                 e_in->renumlists = 0;
00065             }
00066             if ( e_in->renum ) {
00067                 M_free(e_in->renum,"Renummer"); e_in->renum = 0;
00068             }
00069         }
00070         if ( e_in->status == HIDDENLEXPRESSION
00071             || e_in->status == HIDDENEXPRESSION ) numhid++;
00072         switch ( e_in->status ) {
00073             case SPECTATOREXPRESSION:
00074             case LOCALEXPRESSION:
00075             case HIDDENLEXPRESSION:
00076                 if ( par ) {
00077                     AC.exprnames->namenode[e_in->node].type = CDELETE;
00078                     AC.DidClean = 1;
00079                     if ( e_in->status != HIDDENLEXPRESSION )
00080                         ClearBracketIndex(e_in->Expressions);
00081                     break;
00082                 }
00083                 /* fall through */
00084             case GLOBALEXPRESSION:
00085             case HIDDENEXPRESSION:
00086                 if ( par ) {

```

```

00087 #ifdef WITHMPI
00088     /*
00089      * Broadcast the global expression from the master to the all workers.
00090      */
00091     if ( PF_BroadcastExpr(e_in, e_in->status == HIDDENEXPRESSION ? AR.hidefile :
AR.outfile) ) return -1;
00092     if ( PF.me == MASTER ) {
00093 #endif
00094         e = e_in;
00095         i = n-1;
00096         while ( --i >= 0 ) {
00097             e++;
00098             if ( e_in->status == HIDDENEXPRESSION ) {
00099                 if ( e->status == HIDDENEXPRESSION
|| e->status == HIDDENLEXPRESSION ) break;
00100             }
00101             else {
00102                 if ( e->status == GLOBALEXPRESSION
|| e->status == LOCALEXPRESSION ) break;
00103             }
00104         }
00105     }
00106 #ifdef WITHMPI
00107 }
00108 else {
00109     /*
00110      * On the slaves, the broadcast expression is sitting at the end of the file.
00111      */
00112     e = e_in;
00113     i = -1;
00114 }
00115 #endif
00116 if ( i >= 0 ) {
00117     DIFPOS(length, e->onfile, e_in->onfile);
00118 }
00119 else {
00120     FILEHANDLE *f = e_in->status == HIDDENEXPRESSION ? AR.hidefile : AR.outfile;
00121     if ( f->handle < 0 ) {
00122         SETBASELENGTH(length, TOLONG(f->Pofull)
- TOLONG(f->Pobuffer)
- BASEPOSITION(e_in->onfile));
00123     }
00124     else {
00125         SeekFile(f->handle, &(f->filesize), SEEK_SET);
00126         DIFPOS(length, f->filesize, e_in->onfile);
00127     }
00128 }
00129 if ( ToStorage(e_in, &length) ) {
00130     return (MesCall("CleanExpr"));
00131 }
00132 e_in->status = STOREDEXPRESSION;
00133 if ( e_in->status != HIDDENEXPRESSION )
00134     ClearBracketIndex(e_in->Expressions);
00135 }
00136 /* fall through */
00137 case SKIPLEXPRESSION:
00138 case DROPLEXPRESSION:
00139 case DROPHLEXPRESSION:
00140 case DROPGEXPRESSION:
00141 case DROPHGEXPRESSION:
00142 case STOREDEXPRESSION:
00143 case DROPSPECTATOREXPRESSION:
00144     if ( e_out != e_in ) {
00145         node = AC.exprnames->namenode + e_in->node;
00146         node->number = e_out - Expressions;
00147
00148         e_out->onfile = e_in->onfile;
00149         e_out->size = e_in->size;
00150         e_out->printflag = 0;
00151         if ( par ) e_out->status = STOREDEXPRESSION;
00152         else e_out->status = e_in->status;
00153         e_out->name = e_in->name;
00154         e_out->node = e_in->node;
00155         e_out->renum = e_in->renum;
00156         e_out->renumlists = e_in->renumlists;
00157         e_out->counter = e_in->counter;
00158         e_out->hidelevel = e_in->hidelevel;
00159         e_out->inmem = e_in->inmem;
00160         e_out->bracketinfo = e_in->bracketinfo;
00161         e_out->newbracketinfo = e_in->newbracketinfo;
00162         e_out->numdummies = e_in->numdummies;
00163         e_out->numfactors = e_in->numfactors;
00164         e_out->vflags = e_in->vflags;
00165         e_out->uflags = e_in->uflags;
00166         e_out->sizeprototype = e_in->sizeprototype;
00167     }
00168 #ifdef PARALLELCODE
00169     e_out->partodo = 0;

```

```

00173 #endif
00174         e_out++;
00175         j++;
00176         break;
00177     case DROPEXPRESSION:
00178         break;
00179     default:
00180         AC.exprnames->namenode[e_in->node].type = CDELETE;
00181         AC.DidClean = 1;
00182         break;
00183     }
00184     e_in++;
00185 } while ( --n > 0 ); }
00186 UpdateMaxSize();
00187 NumExpressions = j;
00188 if ( numhid == 0 && AR.hidefile->PObuffer ) {
00189     if ( AR.hidefile->handle >= 0 ) {
00190         CloseFile(AR.hidefile->handle);
00191         remove(AR.hidefile->name);
00192         AR.hidefile->handle = -1;
00193     }
00194     AR.hidefile->POfull =
00195     AR.hidefile->POfill = AR.hidefile->PObuffer;
00196     PUTZERO(AR.hidefile->POposition);
00197 }
00198 FlushSpectators();
00199 return(0);
00200 }
00201
00202 /*
00203     #] CleanExpr :
00204     #[ PopVariables :
00205
00206     Pops the local variables from the tables.
00207     The Expressions are reprocessed and their tables are compactified.
00208
00209 */
00210
00211 int PopVariables(void)
00212 {
00213     GETIDENTITY
00214     WORD i, j;
00215     int retval;
00216     UBYTE *s;
00217
00218     retval = CleanExpr(1);
00219     ResetVariables(1);
00220
00221     if ( AC.DidClean ) CompactifyTree(AC.exprnames,EXPRNAMES);
00222
00223     AC.CodesFlag = AM.gCodesFlag;
00224     AC.NamesFlag = AM.gNamesFlag;
00225     AC.StatsFlag = AM.gStatsFlag;
00226 #ifdef WITHFLOAT
00227     AC.MaxWeight = AM.gMaxWeight;
00228     AC.DefaultPrecision = AM.gDefaultPrecision;
00229 #endif
00230     AC.OldFactArgFlag = AM.gOldFactArgFlag;
00231     AC.TokensWriteFlag = AM.gTokensWriteFlag;
00232     AC.extrasymbols = AM.gextrasymbols;
00233     if ( AC.extrasym ) { M_free(AC.extrasym,"extrasym"); AC.extrasym = 0; }
00234     i = 1; s = AM.gextrasym; while ( *s ) { s++; i++; }
00235     AC.extrasym = (UBYTE *)Malloc1(i*sizeof(UBYTE),"extrasym");
00236     for ( j = 0; j < i; j++ ) AC.extrasym[j] = AM.gextrasym[j];
00237     AO.NoSpacesInNumbers = AM.gNoSpacesInNumbers;
00238     AC.IndentSpace = AM.gIndentSpace;
00239     AC.lUnitTrace = AM.gUnitTrace;
00240     AC.lDefDim = AM.gDefDim;
00241     AC.lDefDim4 = AM.gDefDim4;
00242     if ( AC.halfmod ) {
00243         if ( AC.ncmod == AM.gncmod && AC.modmode == AM.gmodmode ) {
00244             j = ABS(AC.ncmod);
00245             while ( --j >= 0 ) {
00246                 if ( AC.cmod[j] != AM.gcmod[j] ) break;
00247             }
00248             if ( j >= 0 ) {
00249                 M_free(AC.halfmod,"halfmod");
00250                 AC.halfmod = 0; AC.nhalfmod = 0;
00251             }
00252         }
00253         else {
00254             M_free(AC.halfmod,"halfmod");
00255             AC.halfmod = 0; AC.nhalfmod = 0;
00256         }
00257     }
00258     if ( AC.modinverses ) {
00259         if ( AC.ncmod == AM.gncmod && AC.modmode == AM.gmodmode ) {

```

```

00260         j = ABS(AC.ncmod);
00261         while ( --j >= 0 ) {
00262             if ( AC.cmod[j] != AM.gcmmod[j] ) break;
00263         }
00264         if ( j >= 0 ) {
00265             M_free(AC.modinverses,"modinverses");
00266             AC.modinverses = 0;
00267         }
00268     }
00269     else {
00270         M_free(AC.modinverses,"modinverses");
00271         AC.modinverses = 0;
00272     }
00273 }
00274 AN.ncmod = AC.ncmod = AM.gncmod;
00275 AC.npowmod = AM.gnpowmod;
00276 AC.modmode = AM.gmodmode;
00277 if ( ( ( AC.modmode & INVERSETABLE ) != 0 ) && ( AC.modinverses == 0 ) )
00278     MakeInverses();
00279 AC.funpowers = AM.gfunpowers;
00280 AC.lPolyFun = AM.gPolyFun;
00281 AC.lPolyFunInv = AM.gPolyFunInv;
00282 AC.lPolyFunType = AM.gPolyFunType;
00283 AC.lPolyFunExp = AM.gPolyFunExp;
00284 AR.PolyFunVar = AC.lPolyFunVar = AM.gPolyFunVar;
00285 AC.lPolyFunPow = AM.gPolyFunPow;
00286 AC.parallelflag = AM.gparallelflag;
00287 AC.ProcessBucketSize = AC.mProcessBucketSize = AM.gProcessBucketSize;
00288 AC.properorderflag = AM.gproperorderflag;
00289 AC.ThreadBucketSize = AM.gThreadBucketSize;
00290 AC.ThreadStats = AM.gThreadStats;
00291 AC.FinalStats = AM.gFinalStats;
00292 AC.OldGCDflag = AM.gOldGCDflag;
00293 AC.WTimeStatsFlag = AM.gWTimeStatsFlag;
00294 AC.ThreadsFlag = AM.gThreadsFlag;
00295 AC.ThreadBalancing = AM.gThreadBalancing;
00296 AC.ThreadSortFileSynch = AM.gThreadSortFileSynch;
00297 AC.ProcessStats = AM.gProcessStats;
00298 AC.OldParallelStats = AM.gOldParallelStats;
00299 AC.IsFortran90 = AM.gIsFortran90;
00300 AC.SizeCommuteInSet = AM.gSizeCommuteInSet;
00301 PruneExtraSymbols(AM.gnumextrasyms);
00302
00303 if ( AC.Fortran90Kind ) {
00304     M_free(AC.Fortran90Kind,"Fortran90 Kind");
00305     AC.Fortran90Kind = 0;
00306 }
00307 if ( AM.gFortran90Kind ) {
00308     AC.Fortran90Kind = strdup(AM.gFortran90Kind,"Fortran90 Kind");
00309 }
00310 if ( AC.ThreadsFlag && AM.totalnumberofthreads > 1 ) AS.MultiThreaded = 1;
00311 {
00312     UWORD *p, *m;
00313     p = AM.gcmmod;
00314     m = AC.cmod;
00315     j = ABS(AC.ncmod);
00316     NCOPY(m,p,j);
00317     p = AM.gpowmod;
00318     m = AC.powmod;
00319     j = AC.npowmod;
00320     NCOPY(m,p,j);
00321     if ( AC.DirtPow ) {
00322         if ( MakeModTable() ) {
00323             MesPrint("===No printing in powers of generator");
00324         }
00325         AC.DirtPow = 0;
00326     }
00327 }
00328 {
00329     WORD *p, *m;
00330     p = AM.gUniTrace;
00331     m = AC.lUniTrace;
00332     j = 4;
00333     NCOPY(m,p,j);
00334 }
00335 AC.Cnumpows = AM.gCnumpows;
00336 AC.OutputMode = AM.gOutputMode;
00337 AC.OutputSpaces = AM.gOutputSpaces;
00338 AC.OutNumberType = AM.gOutNumberType;
00339 AR.SortType = AC.SortType = AM.gSortType;
00340 AC.ShortStatsMax = AM.gShortStatsMax;
00341 /*
00342 Now we have to clean up the commutation properties
00343 */
00344 for ( i = 0; i < NumFunctions; i++ ) functions[i].flags &= ~COULDCOMMUTE;
00345 if ( AC.CommuteInSet ) {
00346     WORD *g, *gg;

```

```

00347     g = AC.CommuteInSet;
00348     while ( *g ) {
00349         gg = g+1; g += *g;
00350         while ( gg < g ) {
00351             if ( *gg <= GAMMASEVEN && *gg >= GAMMA ) {
00352                 functions[GAMMA-FUNCTION].flags |= COULDCOMMUTE;
00353                 functions[GAMMAI-FUNCTION].flags |= COULDCOMMUTE;
00354                 functions[GAMMAFIVE-FUNCTION].flags |= COULDCOMMUTE;
00355                 functions[GAMMASIX-FUNCTION].flags |= COULDCOMMUTE;
00356                 functions[GAMMASEVEN-FUNCTION].flags |= COULDCOMMUTE;
00357             }
00358             else {
00359                 functions[*gg-FUNCTION].flags |= COULDCOMMUTE;
00360             }
00361         }
00362     }
00363 }
00364 /*
00365 Clean up the dictionaries.
00366 */
00367 for ( i = AO.NumDictionaries-1; i >= AO.gNumDictionaries; i-- ) {
00368     RemoveDictionary(AO.Dictionaries[i]);
00369     M_free(AO.Dictionaries[i], "Dictionary");
00370 }
00371 for( ; i >= 0; i-- ) {
00372     ShrinkDictionary(AO.Dictionaries[i]);
00373 }
00374 AO.NumDictionaries = AO.gNumDictionaries;
00375 return(retval);
00376 }
00377
00378 /*
00379     #] PopVariables :
00380     #[ MakeGlobal :
00381 */
00382
00383 void MakeGlobal(void)
00384 {
00385     WORD i, j, *pp, *mm;
00386     UWORD *p, *m;
00387     UBYTE *s;
00388     Globalize(0);
00389
00390     AM.gCodesFlag = AC.CodesFlag;
00391     AM.gNamesFlag = AC.NamesFlag;
00392     AM.gStatsFlag = AC.StatsFlag;
00393     #ifdef WITHFLOAT
00394     AM.gMaxWeight = AC.MaxWeight;
00395     AM.gDefaultPrecision = AC.DefaultPrecision;
00396     #endif
00397     AM.gOldFactArgFlag = AC.OldFactArgFlag;
00398     AM.gextrasymsymbols = AC.gextrasymsymbols;
00399     if ( AM.gextrasym ) { M_free(AM.gextrasym, "extrasym"); AM.gextrasym = 0; }
00400     i = 1; s = AC.gextrasym; while ( *s ) { s++; i++; }
00401     AM.gextrasym = (UBYTE *)Malloc1(i*sizeof(UBYTE), "extrasym");
00402     for ( j = 0; j < i; j++ ) AM.gextrasym[j] = AC.gextrasym[j];
00403     AM.gTokensWriteFlag = AC.TokensWriteFlag;
00404     AM.gNoSpacesInNumbers = AO.NoSpacesInNumbers;
00405     AM.gIndentSpace = AO.IndentSpace;
00406     AM.gUnitTrace = AC.lUnitTrace;
00407     AM.gDefDim = AC.lDefDim;
00408     AM.gDefDim4 = AC.lDefDim4;
00409     AM.gncmod = AC.ncmod;
00410     AM.gnpowmod = AC.npowmod;
00411     AM.gmodmode = AC.modmode;
00412     AM.gCnumpows = AC.Cnumpows;
00413     AM.gOutputMode = AC.OutputMode;
00414     AM.gOutputSpaces = AC.OutputSpaces;
00415     AM.gOutNumberType = AC.OutNumberType;
00416     AM.gfunpowers = AC.funpowers;
00417     AM.gPolyFun = AC.lPolyFun;
00418     AM.gPolyFunInv = AC.lPolyFunInv;
00419     AM.gPolyFunType = AC.lPolyFunType;
00420     AM.gPolyFunExp = AC.lPolyFunExp;
00421     AM.gPolyFunVar = AC.lPolyFunVar;
00422     AM.gPolyFunPow = AC.lPolyFunPow;
00423     AM.gparallelflag = AC.parallelflag;
00424     AM.gProcessBucketSize = AC.ProcessBucketSize;
00425     AM.gproperorderflag = AC.properorderflag;
00426     AM.gThreadBucketSize = AC.ThreadBucketSize;
00427     AM.gThreadStats = AC.ThreadStats;
00428     AM.gFinalStats = AC.FinalStats;
00429     AM.gOldGCDflag = AC.OldGCDflag;
00430     AM.gWTimeStatsFlag = AC.WTimeStatsFlag;
00431     AM.gThreadsFlag = AC.ThreadsFlag;
00432     AM.gThreadBalancing = AC.ThreadBalancing;
00433     AM.gThreadSortFileSynch = AC.ThreadSortFileSynch;

```

```

00434     AM.gProcessStats = AC.ProcessStats;
00435     AM.gOldParallelStats = AC.OldParallelStats;
00436     AM.gIsFortran90 = AC.IsFortran90;
00437     AM.gSizeCommuteInSet = AC.SizeCommuteInSet;
00438     AM.gnumextrasyms = (cbuf+AM.sbufnum)->numrhs;
00439     if ( AM.gFortran90Kind ) {
00440         M_free(AM.gFortran90Kind,"Fortran 90 Kind");
00441         AM.gFortran90Kind = 0;
00442     }
00443     if ( AC.Fortran90Kind ) {
00444         AM.gFortran90Kind = strDup1(AC.Fortran90Kind,"Fortran 90 Kind");
00445     }
00446     p = AM.gcmmod;
00447     m = AC.cmod;
00448     i = ABS(AC.ncmod);
00449     NCOPY(p,m,i);
00450     p = AM.gpowmod;
00451     m = AC.powmod;
00452     i = AC.npowmod;
00453     NCOPY(p,m,i);
00454     pp = AM.gUniTrace;
00455     mm = AC.lUniTrace;
00456     i = 4;
00457     NCOPY(pp,mm,i);
00458     AM.gSortType = AC.SortType;
00459     AM.gShortStatsMax = AC.ShortStatsMax;
00460
00461     if ( AO.CurrentDictionary > 0 || AP.OpenDictionary > 0 ) {
00462         Warning("You cannot have an open or selected dictionary at a .global. Dictionary closed.");
00463         AP.OpenDictionary = 0;
00464         AO.CurrentDictionary = 0;
00465     }
00466
00467     AO.gNumDictionaries = AO.NumDictionaries;
00468     for ( i = 0; i < AO.NumDictionaries; i++ ) {
00469         AO.Dictionaries[i]->gnumelements = AO.Dictionaries[i]->numelements;
00470     }
00471     if ( AM.NumSpectatorFiles > 0 ) {
00472         for ( i = 0; i < AM.SizeForSpectatorFiles; i++ ) {
00473             if ( AM.SpectatorFiles[i].name != 0 )
00474                 AM.SpectatorFiles[i].flags |= GLOBALSPECTATORFLAG;
00475         }
00476     }
00477 }
00478
00479 /*
00480     #] MakeGlobal :
00481     #[ TestDrop :
00482 */
00483
00484 void TestDrop(void)
00485 {
00486     EXPRESSIONS e;
00487     WORD j;
00488     for ( j = 0, e = Expressions; j < NumExpressions; j++, e++ ) {
00489         switch ( e->status ) {
00490             case SKIPLEXPRESSION:
00491                 e->status = LOCALEXPRESSION;
00492                 break;
00493             case UNHIDELEXPRESSION:
00494                 e->status = LOCALEXPRESSION;
00495                 ClearBracketIndex(j);
00496                 e->bracketinfo = e->newbracketinfo; e->newbracketinfo = 0;
00497                 break;
00498             case HIDELEXPRESSION:
00499                 e->status = HIDDENLEXPRESSION;
00500                 break;
00501             case SKIPGEXPRESSION:
00502                 e->status = GLOBALEXPRESSION;
00503                 break;
00504             case UNHIDEGEXPRESSION:
00505                 e->status = GLOBALEXPRESSION;
00506                 ClearBracketIndex(j);
00507                 e->bracketinfo = e->newbracketinfo; e->newbracketinfo = 0;
00508                 break;
00509             case HIDEGEXPRESSION:
00510                 e->status = HIDDENGEXPRESSION;
00511                 break;
00512             case DROPLEXPRESSION:
00513             case DROPGEXPRESSION:
00514             case DROPHLEXPRESSION:
00515             case DROPHGEXPRESSION:
00516             case DROPSPECTATOREXPRESSION:
00517                 e->status = DROPPEDEXPRESSION;
00518                 ClearBracketIndex(j);
00519                 e->bracketinfo = e->newbracketinfo; e->newbracketinfo = 0;
00520                 if ( e->replace >= 0 ) {

```

```

00521         Expressions[e->replace].replace = REGULAREXPRESSION;
00522         AC.exprnames->namenode[e->node].number = e->replace;
00523         e->replace = REGULAREXPRESSION;
00524     }
00525     else {
00526         AC.exprnames->namenode[e->node].type = CDELETE;
00527         AC.DidClean = 1;
00528     }
00529     break;
00530 case LOCALEXPRESSION:
00531 case GLOBALEXPRESSION:
00532     ClearBracketIndex(j);
00533     e->bracketinfo = e->newbracketinfo; e->newbracketinfo = 0;
00534     break;
00535 case HIDDENLEXPRESSION:
00536 case HIDDENGEXPRESSION:
00537     break;
00538 case INTOHIDELEXPRESSION:
00539     ClearBracketIndex(j);
00540     e->bracketinfo = e->newbracketinfo; e->newbracketinfo = 0;
00541     e->status = HIDDENLEXPRESSION;
00542     break;
00543 case INTOHIDEGEXPRESSION:
00544     ClearBracketIndex(j);
00545     e->bracketinfo = e->newbracketinfo; e->newbracketinfo = 0;
00546     e->status = HIDDENGEXPRESSION;
00547     break;
00548 default:
00549     ClearBracketIndex(j);
00550     e->bracketinfo = 0;
00551     break;
00552 }
00553 if ( e->replace == NEWLYDEFINEDEXPRESSION ) e->replace = REGULAREXPRESSION;
00554 }
00555 }
00556
00557 /*
00558     #] TestDrop :
00559     #[ PutInVflags :
00560 */
00561 void PutInVflags(WORD nexpr)
00562 {
00563     EXPRESSIONS e = Expressions + nexpr;
00564     POSITION *old;
00565     WORD *oldw;
00566     int i;
00567 restart:;
00568     if ( AS.OldOnFile == 0 ) {
00569         AS.NumOldOnFile = 20;
00570         AS.OldOnFile = (POSITION *)Malloc1(AS.NumOldOnFile*sizeof(POSITION),"file pointers");
00571     }
00572     else if ( nexpr >= AS.NumOldOnFile ) {
00573         old = AS.OldOnFile;
00574         AS.OldOnFile = (POSITION *)Malloc1(2*AS.NumOldOnFile*sizeof(POSITION),"file pointers");
00575         for ( i = 0; i < AS.NumOldOnFile; i++ ) AS.OldOnFile[i] = old[i];
00576         AS.NumOldOnFile = 2*AS.NumOldOnFile;
00577         M_free(old,"process file pointers");
00578     }
00579     if ( AS.OldNumFactors == 0 ) {
00580         AS.NumOldNumFactors = 20;
00581         AS.OldNumFactors = (WORD *)Malloc1(AS.NumOldNumFactors*sizeof(WORD),"numfactors pointers");
00582         AS.Oldvflags = (WORD *)Malloc1(AS.NumOldNumFactors*sizeof(WORD),"vflags pointers");
00583         AS.Olduflags = (WORD *)Malloc1(AS.NumOldNumFactors*sizeof(WORD),"uflags pointers");
00584     }
00585     else if ( nexpr >= AS.NumOldNumFactors ) {
00586         oldw = AS.OldNumFactors;
00587         AS.OldNumFactors = (WORD *)Malloc1(2*AS.NumOldNumFactors*sizeof(WORD),"numfactors pointers");
00588         for ( i = 0; i < AS.NumOldNumFactors; i++ ) AS.OldNumFactors[i] = oldw[i];
00589         M_free(oldw,"numfactors pointers");
00590         oldw = AS.Oldvflags;
00591         AS.Oldvflags = (WORD *)Malloc1(2*AS.NumOldNumFactors*sizeof(WORD),"vflags pointers");
00592         for ( i = 0; i < AS.NumOldNumFactors; i++ ) AS.Oldvflags[i] = oldw[i];
00593         M_free(oldw,"vflags pointers");
00594         oldw = AS.Olduflags;
00595         AS.Olduflags = (WORD *)Malloc1(2*AS.NumOldNumFactors*sizeof(WORD),"uflags pointers");
00596         for ( i = 0; i < AS.NumOldNumFactors; i++ ) AS.Olduflags[i] = oldw[i];
00597         M_free(oldw,"uflags pointers");
00598         AS.NumOldNumFactors = 2*AS.NumOldNumFactors;
00599     }
00600 }
00601 /*
00602     The next is needed when we Load a .sav file with lots of expressions.
00603 */
00604 if ( nexpr >= AS.NumOldOnFile || nexpr >= AS.NumOldNumFactors ) goto restart;
00605 AS.OldOnFile[nexpr] = e->onfile;
00606 AS.OldNumFactors[nexpr] = e->numfactors;
00607 AS.Oldvflags[nexpr] = e->vflags;

```



```

00608     AS.Olduflags[nexpr] = e->uflags;
00609 }
00610
00611 /*
00612     #] PutInVflags :
00613     #[ DoExecute :
00614 */
00615
00616 int DoExecute(WORD par, WORD skip)
00617 {
00618     GETIDENTITY
00619     int RetCode = 0;
00620     int i, oldmultithreaded = AS.MultiThreaded;
00621 #ifdef PARALLELCODE
00622     int j;
00623 #endif
00624
00625     SpecialCleanup(BHEAD0);
00626     if ( skip ) goto skipexec;
00627     if ( AC.IfLevel > 0 ) {
00628         MesPrint(" %d endif statement(s) missing",AC.IfLevel);
00629         RetCode = 1;
00630     }
00631     if ( AC.WhileLevel > 0 ) {
00632         MesPrint(" %d endwhile statement(s) missing",AC.WhileLevel);
00633         RetCode = 1;
00634     }
00635     if ( AC.arglevel > 0 ) {
00636         MesPrint(" %d endargument statement(s) missing",AC.arglevel);
00637         RetCode = 1;
00638     }
00639     if ( AC.termlevel > 0 ) {
00640         MesPrint(" %d endterm statement(s) missing",AC.termlevel);
00641         RetCode = 1;
00642     }
00643     if ( AC.insidelevel > 0 ) {
00644         MesPrint(" %d endinside statement(s) missing",AC.insidelevel);
00645         RetCode = 1;
00646     }
00647     if ( AC.inexprlevel > 0 ) {
00648         MesPrint(" %d endinexpression statement(s) missing",AC.inexprlevel);
00649         RetCode = 1;
00650     }
00651     if ( AC.NumLabels > 0 ) {
00652         for ( i = 0; i < AC.NumLabels; i++ ) {
00653             if ( AC.Labels[i] < 0 ) {
00654                 MesPrint(" -->Label %s missing",AC.LabelNames[i]);
00655                 RetCode = 1;
00656             }
00657         }
00658     }
00659     if ( AC.SwitchLevel > 0 ) {
00660         MesPrint(" %d endswitch statement(s) missing",AC.SwitchLevel);
00661         RetCode = 1;
00662     }
00663     if ( AC.dolooplevel > 0 ) {
00664         MesPrint(" %d enddo statement(s) missing",AC.dolooplevel);
00665         RetCode = 1;
00666     }
00667     if ( AP.OpenDictionary > 0 ) {
00668         MesPrint(" Dictionary %s has not been closed.",
00669             AO.Dictionaries[AP.OpenDictionary-1]->name);
00670         AP.OpenDictionary = 0;
00671         RetCode = 1;
00672     }
00673     if ( RetCode ) return(RetCode);
00674     AR.Cnumlhs = cbuf[AM.rbufnum].numlhs;
00675
00676     if ( ( AS.ExecMode = par ) == GLOBALMODULE ) AS.ExecMode = 0;
00677 #ifdef PARALLELCODE
00678 /*
00679     Now check whether we have either the regular parallel flag or the
00680     mparallel flag set.
00681     Next check whether any of the expressions has partodo set.
00682     If any of the above we need to check what the dollar status is.
00683 */
00684     AC.partodoflag = -1;
00685     if ( NumPotModdollars >= 0 ) {
00686         for ( i = 0; i < NumExpressions; i++ ) {
00687             if ( Expressions[i].partodo ) { AC.partodoflag = 1; break; }
00688         }
00689     }
00690 #ifdef WITHMPI
00691     if ( AC.partodoflag > 0 && PF.numtasks < 3 ) {
00692         AC.partodoflag = 0;
00693     }
00694 #endif

```

```

00695     if ( AC.partodoflag > 0 || ( NumPotModdollars > 0 && AC.mparallelflag == PARALLELFLAG ) ) {
00696     if ( NumPotModdollars > NumModOptdollars ) {
00697         AC.mparallelflag |= NOPARALLEL_DOLLAR;
00698 #ifdef WITHPTHREADS
00699         AS.MultiThreaded = 0;
00700 #endif
00701         AC.partodoflag = 0;
00702     }
00703     else {
00704         for ( i = 0; i < NumPotModdollars; i++ ) {
00705             for ( j = 0; j < NumModOptdollars; j++ ) {
00706                 if ( PotModdollars[i] == ModOptdollars[j].number ) break;
00707                 if ( j >= NumModOptdollars ) {
00708                     AC.mparallelflag |= NOPARALLEL_DOLLAR;
00709 #ifdef WITHPTHREADS
00710                     AS.MultiThreaded = 0;
00711 #endif
00712                     AC.partodoflag = 0;
00713                     break;
00714                 }
00715                 switch ( ModOptdollars[j].type ) {
00716                     case MODSUM:
00717                     case MODMAX:
00718                     case MODMIN:
00719                     case MODLOCAL:
00720                         break;
00721                     default:
00722                         AC.mparallelflag |= NOPARALLEL_DOLLAR;
00723                         AS.MultiThreaded = 0;
00724                         AC.partodoflag = 0;
00725                         break;
00726                 }
00727             }
00728         }
00729     }
00730     else if ( ( AC.mparallelflag & NOPARALLEL_USER ) != 0 ) {
00731 #ifdef WITHPTHREADS
00732         AS.MultiThreaded = 0;
00733 #endif
00734         AC.partodoflag = 0;
00735     }
00736     if ( AC.partodoflag == 0 ) {
00737         for ( i = 0; i < NumExpressions; i++ ) {
00738             Expressions[i].partodo = 0;
00739         }
00740     }
00741     else if ( AC.partodoflag == -1 ) {
00742         AC.partodoflag = 0;
00743     }
00744 #endif
00745 #ifdef WITHMPI
00746 /*
00747  * Check RHS expressions.
00748  */
00749 if ( AC.RhsExprInModuleFlag && (AC.mparallelflag == PARALLELFLAG || AC.partodoflag) ) {
00750     if ( PF.rhsInParallel ) {
00751         PF.mkSlaveInfile=1;
00752         if (PF.me != MASTER) {
00753             PF.slavebuf.PObuffer=(WORD *)Malloc1(AM.ScratSize*sizeof(WORD),"PF inbuf");
00754             PF.slavebuf.POsize=AM.ScratSize*sizeof(WORD);
00755             PF.slavebuf.POfull = PF.slavebuf.POfill = PF.slavebuf.PObuffer;
00756             PF.slavebuf.POstop= PF.slavebuf.PObuffer+AM.ScratSize;
00757             PUTZERO(PF.slavebuf.POposition);
00758             /*if (PF.me != MASTER)*/
00759         }
00760         else {
00761             AC.mparallelflag |= NOPARALLEL_RHS;
00762             AC.partodoflag = 0;
00763             for ( i = 0; i < NumExpressions; i++ ) {
00764                 Expressions[i].partodo = 0;
00765             }
00766         }
00767     }
00768 /*
00769  * Set $-variables with MODSUM to zero on the slaves.
00770  */
00771 if ( (AC.mparallelflag == PARALLELFLAG || AC.partodoflag) && PF.me != MASTER ) {
00772     for ( i = 0; i < NumModOptdollars; i++ ) {
00773         if ( ModOptdollars[i].type == MODSUM ) {
00774             DOLLARS d = Dollars + ModOptdollars[i].number;
00775             d->type = DOLZERO;
00776             if ( d->where && d->where != &AM.dollarzero ) M_free(d->where, "old content of
dollar");
00777             d->where = &AM.dollarzero;
00778             d->size = 0;
00779             CleanDollarFactors(d);
00780         }

```

```

00781     }
00782 }
00783 #endif
00784 AR.SortType = AC.SortType;
00785 #ifdef WITHMPI
00786     if ( PF.me == MASTER )
00787 #endif
00788 {
00789     if ( AC.SetupFlag ) WriteSetup();
00790     if ( AC.NamesFlag || AC.CodesFlag ) WriteLists();
00791 }
00792 if ( par == GLOBALMODULE ) MakeGlobal();
00793 if ( RevertScratch() ) return(-1);
00794 if ( AC.ncmod ) SetMods();
00795 /*
00796     Warn if the module has to run in sequential mode due to some problems.
00797 */
00798 #ifdef WITHMPI
00799     if ( PF.me == MASTER )
00800 #endif
00801 {
00802     if ( !AC.ThreadsFlag || AC.mparallelflag & NOPARALLEL_USER ) {
00803         /* The user switched off the parallel execution explicitly. */
00804     }
00805     else if ( AC.mparallelflag & NOPARALLEL_DOLLAR ) {
00806         if ( AC.WarnFlag >= 1 ) { /* Warning */
00807             int i, j, k, n;
00808             UBYTE *s, *s1;
00809             s = strdup((UBYTE *)"", "NOPARALLEL_DOLLAR s");
00810             n = 0;
00811             j = NumPotModdollars;
00812             for ( i = 0; i < j; i++ ) {
00813                 for ( k = 0; k < NumModOptdollars; k++ )
00814                     if ( ModOptdollars[k].number == PotModdollars[i] ) break;
00815                 if ( k >= NumModOptdollars ) {
00816                     /* global $-variable */
00817                     if ( n > 0 )
00818                         s = AddToString(s, (UBYTE *)", ", 0);
00819                     s = AddToString(s, (UBYTE *)"$", 0);
00820                     s = AddToString(s, DOLLARNAME(Dollars, PotModdollars[i]), 0);
00821                     n++;
00822                 }
00823             }
00824             s1 = strdup((UBYTE *)"This module is forced to run in sequential mode due to
00825 $-variable", "NOPARALLEL_DOLLAR s1");
00826             if ( n != 1 )
00827                 s1 = AddToString(s1, (UBYTE *)"s", 0);
00828             s1 = AddToString(s1, (UBYTE *)": ", 0);
00829             s1 = AddToString(s1, s, 0);
00830             Warning((char *)s1);
00831             M_free(s, "NOPARALLEL_DOLLAR s");
00832             M_free(s1, "NOPARALLEL_DOLLAR s1");
00833         }
00834         else if ( AC.mparallelflag & NOPARALLEL_RHS ) {
00835             HighWarning("This module is forced to run in sequential mode due to RHS expression
00836 names");
00837         }
00838         else if ( AC.mparallelflag & NOPARALLEL_CONVPOLY ) {
00839             HighWarning("This module is forced to run in sequential mode due to conversion to extra
00840 symbols");
00841         }
00842         else if ( AC.mparallelflag & NOPARALLEL_SPECTATOR ) {
00843             HighWarning("This module is forced to run in sequential mode due to
00844 tospectator/copspectator");
00845         }
00846         else if ( AC.mparallelflag & NOPARALLEL_TBLDOLLAR ) {
00847             HighWarning("This module is forced to run in sequential mode due to $-variable assignments
00848 in tables");
00849         }
00850         else if ( AC.mparallelflag & NOPARALLEL_NPROC ) {
00851             HighWarning("This module is forced to run in sequential mode because there is only one
00852 processor");
00853         }
00854     }
00855 }
00856 /*
00857     Now the actual execution
00858 */
00859 #ifdef WITHMPI
00860     /*
00861         * Turn on AS.printflag to print runtime errors occurring on slaves.
00862         */
00863     AS.printflag = 1;
00864 #endif
00865 if ( AP.preError == 0 && ( Processor() || WriteAll() ) ) RetCode = -1;
00866 #ifdef WITHMPI
00867     AS.printflag = 0;

```

```

00862 #endif
00863 /*
00864     That was it. Next is cleanup.
00865 */
00866     if ( AC.ncmod ) UnSetMods();
00867     AS.MultiThreaded = oldmultithreaded;
00868     TableReset();
00869
00870 /*[28sep2005 mt]:*/
00871 #ifdef WITHMPI
00872     /* Combine and then broadcast modified dollar variables. */
00873     if ( NumPotModdollars > 0 ) {
00874         RetCode = PF_CollectModifiedDollars();
00875         if ( RetCode ) return RetCode;
00876         RetCode = PF_BroadcastModifiedDollars();
00877         if ( RetCode ) return RetCode;
00878     }
00879     /* Broadcast the list of objects converted to symbols in AM.sbufnum. */
00880     if ( AC.topolynomialflag & TOPOLYNOMIALFLAG ) {
00881         RetCode = PF_BroadcastCBuf(AM.sbufnum);
00882         if ( RetCode ) return RetCode;
00883     }
00884     /*
00885     * Broadcast AR.expflags, which may be used on the slaves in the next module
00886     * via ZERO_ or UNCHANGED_. It also broadcasts several flags of each expression.
00887     */
00888     RetCode = PF_BroadcastExpFlags();
00889     if ( RetCode ) return RetCode;
00890     /*
00891     * Clean the hide file on the slaves, which was used for RHS expressions
00892     * broadcast from the master at the beginning of the module.
00893     */
00894     if ( PF.me != MASTER && AR.hidefile->PObuffer ) {
00895         if ( AR.hidefile->handle >= 0 ) {
00896             CloseFile(AR.hidefile->handle);
00897             AR.hidefile->handle = -1;
00898             remove(AR.hidefile->name);
00899         }
00900         AR.hidefile->POfull = AR.hidefile->POfill = AR.hidefile->PObuffer;
00901         PUTZERO(AR.hidefile->POposition);
00902     }
00903 #endif
00904 #ifdef WITHPTHREADS
00905     for ( j = 0; j < NumModOptdollars; j++ ) {
00906         if ( ModOptdollars[j].dstruct ) {
00907             /*
00908                 First clean up dollar values.
00909             */
00910             for ( i = 0; i < AM.totalnumberofthreads; i++ ) {
00911                 if ( ModOptdollars[j].dstruct[i].size > 0 ) {
00912                     CleanDollarFactors(&(ModOptdollars[j].dstruct[i]));
00913                     M_free(ModOptdollars[j].dstruct[i].where,"Local dollar value");
00914                 }
00915             }
00916             /*
00917                 Now clean up the whole array.
00918             */
00919             M_free(ModOptdollars[j].dstruct,"Local DOLLARS");
00920             ModOptdollars[j].dstruct = 0;
00921         }
00922     }
00923 #endif
00924 /*:[28sep2005 mt]:*/
00925
00926 /*
00927     @@@@@@@@@@@@@@@@@@
00928     Now follows the code to invalidate caches for all objects in the
00929     PotModdollars. There are NumPotModdollars of them and PotModdollars
00930     is an array of WORD.
00931 */
00932 /*
00933     Cleanup:
00934 */
00935 #ifdef JV_IS_WRONG
00936 /*
00937     Giving back this memory gives way too much activity with Malloc1
00938     Better to keep it and just put the number of used objects to zero (JV)
00939     If you put the lijst equal to NULL, please also make maxnum = 0
00940 */
00941     if ( ModOptdollars ) M_free(ModOptdollars, "ModOptdollars pointer");
00942     if ( PotModdollars ) M_free(PotModdollars, "PotModdollars pointer");
00943
00944     /* ModOptdollars changed to AC.ModOptDolList.lijst because AIX C compiler complained. MF
00945     30/07/2003. */
00946     AC.ModOptDolList.lijst = NULL;
00947     /* PotModdollars changed to AC.PotModDolList.lijst because AIX C compiler complained. MF
00948     30/07/2003. */

```

```

00947     AC.PotModDolList.lijst = NULL;
00948 #endif
00949     NumPotModdollars = 0;
00950     NumModOptdollars = 0;
00951
00952 skipexec:
00953 /*
00954     Clean up the switch information.
00955     We keep the switch array and heap.
00956 */
00957 if ( AC.SwitchInArray > 0 ) {
00958     for ( i = 0; i < AC.SwitchInArray; i++ ) {
00959         SWITCH *sw = AC.SwitchArray + i;
00960         if ( sw->table ) M_free(sw->table,"Switch table");
00961         sw->table = 0;
00962         sw->defaultcase.ncase = 0;
00963         sw->defaultcase.value = 0;
00964         sw->defaultcase.compbuffer = 0;
00965         sw->endswitch.ncase = 0;
00966         sw->endswitch.value = 0;
00967         sw->endswitch.compbuffer = 0;
00968         sw->typetable = 0;
00969         sw->maxcase = 0;
00970         sw->mincase = 0;
00971         sw->numcases = 0;
00972         sw->tablesize = 0;
00973         sw->caseoffset = 0;
00974         sw->iflevel = 0;
00975         sw->whilelevel = 0;
00976         sw->nestingsum = 0;
00977     }
00978     AC.SwitchInArray = 0;
00979     AC.SwitchLevel = 0;
00980 }
00981 #ifdef PARALLELCODE
00982     AC.numpfirstnum = 0;
00983 #endif
00984     AC.DidClean = 0;
00985     AC.PolyRatFunChanged = 0;
00986     TestDrop();
00987     if ( par == STOREMODULE || par == CLEARMODULE ) {
00988         ClearOptimize();
00989         if ( par == STOREMODULE && PopVariables() ) RetCode = -1;
00990         if ( AR.infile->handle >= 0 ) {
00991             CloseFile(AR.infile->handle);
00992             remove(AR.infile->name);
00993             AR.infile->handle = -1;
00994         }
00995         AR.infile->POfill = AR.infile->PObuffer;
00996         PUTZERO(AR.infile->POposition);
00997         AR.infile->POfull = AR.infile->PObuffer;
00998         if ( AR.outfile->handle >= 0 ) {
00999             CloseFile(AR.outfile->handle);
01000             remove(AR.outfile->name);
01001             AR.outfile->handle = -1;
01002         }
01003         AR.outfile->POfull =
01004         AR.outfile->POfill = AR.outfile->PObuffer;
01005         PUTZERO(AR.outfile->POposition);
01006         if ( AR.hidefile->handle >= 0 ) {
01007             CloseFile(AR.hidefile->handle);
01008             remove(AR.hidefile->name);
01009             AR.hidefile->handle = -1;
01010         }
01011         AR.hidefile->POfull =
01012         AR.hidefile->POfill = AR.hidefile->PObuffer;
01013         PUTZERO(AR.hidefile->POposition);
01014         AC.HideLevel = 0;
01015         if ( par == CLEARMODULE ) {
01016             if ( DeleteStore(0) < 0 ) {
01017                 MesPrint("Cannot restart the storage file");
01018                 RetCode = -1;
01019             }
01020             else RetCode = 0;
01021             CleanUp(1);
01022             ResetVariables(2);
01023             AM.gProcessBucketSize = AM.hProcessBucketSize;
01024             AM.gparallelflag = PARALLELFLAG;
01025             AM.gnumextrasyms = AM.ggnumextrasyms;
01026             PruneExtraSymbols(AM.ggnumextrasyms);
01027             IniVars();
01028         }
01029         ClearSpectators(par);
01030     }
01031     else {
01032         if ( CleanExpr(0) ) RetCode = -1;
01033         if ( AC.DidClean ) CompactifyTree(AC.exprnames,EXPRNAMES);

```

```

01034     ResetVariables(0);
01035     CleanupSort(-1);
01036 }
01037 clearcbuf(AC.cbunum);
01038 if ( AC.MultiBracketBuf != 0 ) {
01039     for ( i = 0; i < MAXMULTIBRACKETLEVELS; i++ ) {
01040         if ( AC.MultiBracketBuf[i] ) {
01041             M_free(AC.MultiBracketBuf[i], "bracket buffer i");
01042             AC.MultiBracketBuf[i] = 0;
01043         }
01044     }
01045     AC.MultiBracketLevels = 0;
01046     M_free(AC.MultiBracketBuf, "multi bracket buffer");
01047     AC.MultiBracketBuf = 0;
01048 }
01049
01050 if ( AC.SortReallocateFlag ) {
01051     /* Reallocate the sort buffers to reduce resident set usage */
01052     /* AT.SS is the same as AT.S0 here */
01053     SORTING* S = AT.S0;
01054     M_free(S->lBuffer, "SortReallocate lBuffer+sBuffer");
01055     S->lBuffer = Malloc1(sizeof(* (S->lBuffer)) * (S->LargeSize+S->SmallSize), "SortReallocate
lBuffer+sBuffer");
01056     S->lTop = S->lBuffer+S->LargeSize;
01057     S->sBuffer = S->lTop;
01058     if ( S->LargeSize == 0 ) { S->lBuffer = 0; S->lTop = 0; }
01059     S->sTop = S->sBuffer + S->SmallSize;
01060     S->sTop2 = S->sBuffer + S->SmallSize;
01061     S->sHalf = S->sBuffer + (LONG)((S->SmallSize+S->SmallSize)>>1);
01062
01063 #ifdef WITHPTHREADS
01064     /* We have to re-set the pointers into master lBuffer in the SortBlocks */
01065     UpdateSortBlocks(AM.totalnumberofthreads-1);
01066
01067     /* The SortBots do not have a real sort buffer to reallocate. */
01068     /* AB[0] has been reallocated above already. */
01069     for ( i = 1; i < AM.totalnumberofthreads; i++ ) {
01070         SORTING* S = AB[i]->T.S0;
01071         M_free(S->lBuffer, "SortReallocate lBuffer+sBuffer");
01072         S->lBuffer = Malloc1(sizeof(* (S->lBuffer)) * (S->LargeSize+S->SmallSize), "SortReallocate
lBuffer+sBuffer");
01073         S->lTop = S->lBuffer+S->LargeSize;
01074         S->sBuffer = S->lTop;
01075         if ( S->LargeSize == 0 ) { S->lBuffer = 0; S->lTop = 0; }
01076         S->sTop = S->sBuffer + S->SmallSize;
01077         S->sTop2 = S->sBuffer + S->SmallSize;
01078         S->sHalf = S->sBuffer + (LONG)((S->SmallSize+S->SmallSize)>>1);
01079     }
01080 #endif
01081 }
01082 if ( AC.SortReallocateFlag == 2 ) {
01083     /* The Flag was set for a single module by the preprocessor #sortreallocate,
01084        so turn it off again. */
01085     AC.SortReallocateFlag = 0;
01086 }
01087
01088 return(RetCode);
01089 }
01090
01091 /*
01092     #] DoExecute :
01093     #[ PutBracket :
01094
01095     Routine uses the bracket info to split a term into two pieces:
01096     1: the part outside the bracket, and
01097     2: the part inside the bracket.
01098     These parts are separated by a subterm of type HAAKJE.
01099     This subterm looks like: HAAKJE,3,level
01100     The level is used for nestings of brackets. The print routines
01101     cannot handle this yet (31-Mar-1988).
01102
01103     The Bracket selector is in AT.BrackBuf in the form of a regular term,
01104     but without coefficient.
01105     When AR.BracketOn < 0 we have a so-called antibracket. The main effect
01106     is an exchange of the inner and outer part and where the coefficient goes.
01107
01108     Routine recoded to facilitate b p1,p2; etc for dotproducts and tensors
01109     15-oct-1991
01110 */
01111
01112 int PutBracket(PHEAD WORD *termin)
01113 {
01114     GETBIDENTITY
01115     WORD *t, *t1, *b, i, j, *lastfun;
01116     WORD *t2, *s1, *s2;
01117     WORD *bStop, *bb, *bf, *tStop;
01118     WORD *term1, *term2, *m1, *m2, *tStopa;

```

```

01119     WORD *bbb = 0, *bind, *binst = 0, bwild = 0, *bss = 0, *bns = 0, bset = 0;
01120     term1 = AT.WorkPointer+1;
01121     term2 = (WORD *)(((UBYTE *) (term1)) + AM.MaxTer);
01122     if ( ( (WORD *)(((UBYTE *) (term2)) + AM.MaxTer) ) > AT.WorkTop ) return(MesWork());
01123     if ( AR.BracketOn < 0 ) {
01124         t2 = term1; t1 = term2;      /* AntiBracket */
01125     }
01126     else {
01127         t1 = term1; t2 = term2;      /* Regular bracket */
01128     }
01129     b = AT.BrackBuf; bStop = b+b; b++;
01130     while ( b < bStop ) {
01131         if ( *b == INDEX ) { bwild = 1; bbb = b+2; binst = b + b[1]; }
01132         if ( *b == SETSET ) { bset = 1; bss = b+2; bns = b + b[1]; }
01133         b += b[1];
01134     }
01135
01136     t = termin; tStopa = t + *t; i = *(t + *t -1); i = ABS(i);
01137     if ( AR.PolyFun && AT.PolyAct ) tStop = termin + AT.PolyAct;
01138 #ifdef WITHFLOAT
01139     else if ( AT.FloatPos ) tStop = termin + AT.FloatPos;
01140 #endif
01141     else tStop = tStopa - i;
01142     t++;
01143     if ( AR.BracketOn < 0 ) {
01144         lastfun = 0;
01145         while ( t < tStop && *t >= FUNCTION
01146             && functions[*t-FUNCTION].commute ) {
01147             b = AT.BrackBuf+1;
01148             while ( b < bStop ) {
01149                 if ( *b == *t ) {
01150                     lastfun = t;
01151                     while ( t < tStop && *t >= FUNCTION
01152                         && functions[*t-FUNCTION].commute ) t += t[1];
01153                     goto NextNcom1;
01154                 }
01155                 b += b[1];
01156             }
01157             if ( bset ) {
01158                 b = bss;
01159                 while ( b < bns ) {
01160                     if ( b[1] == CFUNCTION ) { /* Set of functions */
01161                         SETS set = Sets+b[0]; WORD i;
01162                         for ( i = set->first; i < set->last; i++ ) {
01163                             if ( SetElements[i] == *t ) {
01164                                 lastfun = t;
01165                                 while ( t < tStop && *t >= FUNCTION
01166                                     && functions[*t-FUNCTION].commute ) t += t[1];
01167                                 goto NextNcom1;
01168                             }
01169                         }
01170                     }
01171                     b += 2;
01172                 }
01173             }
01174             if ( bwild && *t >= FUNCTION && functions[*t-FUNCTION].spec ) {
01175                 s1 = t + t[1];
01176                 s2 = t + FUNHEAD;
01177                 while ( s2 < s1 ) {
01178                     bind = bbb;
01179                     while ( bind < binst ) {
01180                         if ( *bind == *s2 ) {
01181                             lastfun = t;
01182                             while ( t < tStop && *t >= FUNCTION
01183                                 && functions[*t-FUNCTION].commute ) t += t[1];
01184                             goto NextNcom1;
01185                         }
01186                         bind++;
01187                     }
01188                     s2++;
01189                 }
01190             }
01191             t += t[1];
01192         }
01193     NextNcom1:
01194         s1 = termin + 1;
01195         if ( lastfun ) {
01196             while ( s1 < lastfun ) *t2++ = *s1++;
01197             while ( s1 < t ) *t1++ = *s1++;
01198         }
01199         else {
01200             while ( s1 < t ) *t2++ = *s1++;
01201         }
01202     }
01203 }
01204 else {
01205     lastfun = t;

```

```

01206         while ( t < tStop && *t >= FUNCTION
01207             && functions[*t-FUNCTION].commute ) {
01208             b = AT.BrackBuf+1;
01209             while ( b < bStop ) {
01210                 if ( *b == *t ) { lastfun = t + t[1]; goto NextNcom; }
01211                 b += b[1];
01212             }
01213             if ( bset ) {
01214                 b = bss;
01215                 while ( b < bns ) {
01216                     if ( b[1] == CFUNCTION ) { /* Set of functions */
01217                         SETS set = Sets+b[0]; WORD i;
01218                         for ( i = set->first; i < set->last; i++ ) {
01219                             if ( SetElements[i] == *t ) {
01220                                 lastfun = t + t[1];
01221                                 goto NextNcom;
01222                             }
01223                         }
01224                     }
01225                     b += 2;
01226                 }
01227             }
01228             if ( bwild && *t >= FUNCTION && functions[*t-FUNCTION].spec ) {
01229                 s1 = t + t[1];
01230                 s2 = t + FUNHEAD;
01231                 while ( s2 < s1 ) {
01232                     bind = bbb;
01233                     while ( bind < binst ) {
01234                         if ( *bind == *s2 ) { lastfun = t + t[1]; goto NextNcom; }
01235                         bind++;
01236                     }
01237                     s2++;
01238                 }
01239             }
01240 NextNcom:
01241             t += t[1];
01242         }
01243         s1 = termin + 1;
01244         while ( s1 < lastfun ) *t1++ = *s1++;
01245         while ( s1 < t ) *t2++ = *s1++;
01246     }
01247 /*
01248     Now we have only commuting functions left. Move the b pointer to them.
01249 */
01250     b = AT.BrackBuf + 1;
01251     while ( b < bStop && *b >= FUNCTION
01252         && ( *b < FUNCTION || functions[*b-FUNCTION].commute ) ) {
01253         b += b[1];
01254     }
01255     bf = b;
01256
01257     while ( t < tStop && ( bf < bStop || bwild || bset ) ) {
01258         b = bf;
01259         while ( b < bStop && *b != *t ) { b += b[1]; }
01260         i = t[1];
01261         if ( *t >= FUNCTION ) { /* We are in function territory */
01262             if ( b < bStop && *b == *t ) goto FunBrac;
01263             if ( bset ) {
01264                 b = bss;
01265                 while ( b < bns ) {
01266                     if ( b[1] == CFUNCTION ) { /* Set of functions */
01267                         SETS set = Sets+b[0]; WORD i;
01268                         for ( i = set->first; i < set->last; i++ ) {
01269                             if ( SetElements[i] == *t ) goto FunBrac;
01270                         }
01271                     }
01272                     b += 2;
01273                 }
01274             }
01275             if ( bwild && *t >= FUNCTION && functions[*t-FUNCTION].spec ) {
01276                 s1 = t + t[1];
01277                 s2 = t + FUNHEAD;
01278                 while ( s2 < s1 ) {
01279                     bind = bbb;
01280                     while ( bind < binst ) {
01281                         if ( *bind == *s2 ) goto FunBrac;
01282                         bind++;
01283                     }
01284                     s2++;
01285                 }
01286             }
01287             NCOPY(t2,t,i);
01288             continue;
01289 FunBrac:
01290             NCOPY(t1,t,i);
01291             continue;
01292         }
01293     }
01294 /*

```



```

01293     We have left: DELTA, INDEX, VECTOR, DOTPRODUCT, SYMBOL
01294 */
01295     if ( *t == DELTA ) {
01296         if ( b < bStop && *b == DELTA ) {
01297             b += b[1];
01298             NCOPY(t1,t,i);
01299         }
01300         else { NCOPY(t2,t,i); }
01301     }
01302     else if ( *t == INDEX ) {
01303         if ( bwild ) {
01304             m1 = t1; m2 = t2;
01305             *t1++ = *t; t1++; *t2++ = *t; t2++;
01306             bind = bbb;
01307             j = t[1] - 2;
01308             t += 2;
01309             while ( --j >= 0 ) {
01310                 while ( *bind < *t && bind < binst ) bind++;
01311                 if ( *bind == *t && bind < binst ) {
01312                     *t1++ = *t++;
01313                 }
01314                 else if ( bset ) {
01315                     WORD *b3 = bss;
01316                     while ( b3 < bns ) {
01317                         if ( b3[1] == CVECTOR ) {
01318                             SETS set = Sets+b3[0]; WORD i;
01319                             for ( i = set->first; i < set->last; i++ ) {
01320                                 if ( SetElements[i] == *t ) {
01321                                     *t1++ = *t++;
01322                                     goto nextind;
01323                                 }
01324                             }
01325                         }
01326                         b3 += 2;
01327                     }
01328                     *t2++ = *t++;
01329                 }
01330                 else *t2++ = *t++;
01331 nextind;;
01332             }
01333             m1[1] = WORDDIF(t1,m1);
01334             if ( m1[1] == 2 ) t1 = m1;
01335             m2[1] = WORDDIF(t2,m2);
01336             if ( m2[1] == 2 ) t2 = m2;
01337         }
01338         else if ( bset ) {
01339             m1 = t1; m2 = t2;
01340             *t1++ = *t; t1++; *t2++ = *t; t2++;
01341             j = t[1] - 2;
01342             t += 2;
01343             while ( --j >= 0 ) {
01344                 WORD *b3 = bss;
01345                 while ( b3 < bns ) {
01346                     if ( b3[1] == CVECTOR ) {
01347                         SETS set = Sets+b3[0]; WORD i;
01348                         for ( i = set->first; i < set->last; i++ ) {
01349                             if ( SetElements[i] == *t ) {
01350                                 *t1++ = *t++;
01351                                 goto nextind2;
01352                             }
01353                         }
01354                     }
01355                     b3 += 2;
01356                 }
01357                 *t2++ = *t++;
01358 nextind2;;
01359             }
01360             m1[1] = WORDDIF(t1,m1);
01361             if ( m1[1] == 2 ) t1 = m1;
01362             m2[1] = WORDDIF(t2,m2);
01363             if ( m2[1] == 2 ) t2 = m2;
01364         }
01365         else {
01366             NCOPY(t2,t,i);
01367         }
01368     }
01369     else if ( *t == VECTOR ) {
01370         if ( ( b < bStop && *b == VECTOR ) || bwild ) {
01371             if ( b < bStop && *b == VECTOR ) {
01372                 bb = b + b[1]; b += 2;
01373             }
01374             else bb = b;
01375             j = t[1] - 2;
01376             m1 = t1; m2 = t2; *t1++ = *t; *t2++ = *t; t1++; t2++; t += 2;
01377             while ( j > 0 ) {
01378                 j -= 2;
01379                 while ( b < bb && ( *b < *t ||

```

```

01380         ( *b == *t && b[1] < t[1] ) ) ) b += 2;
01381     if ( b < bb && ( *t == *b && t[1] == b[1] ) ) {
01382         *t1++ = *t++; *t1++ = *t++; goto nextvec;
01383     }
01384     else if ( bwild ) {
01385         bind = bbb;
01386         while ( bind < binst ) {
01387             if ( *t == *bind || t[1] == *bind ) {
01388                 *t1++ = *t++; *t1++ = *t++;
01389                 goto nextvec;
01390             }
01391             bind++;
01392         }
01393     }
01394     if ( bset ) {
01395         WORD *b3 = bss;
01396         while ( b3 < bns ) {
01397             if ( b3[1] == CVECTOR ) {
01398                 SETS set = Sets+b3[0]; WORD i;
01399                 for ( i = set->first; i < set->last; i++ ) {
01400                     if ( SetElements[i] == *t ) {
01401                         *t1++ = *t++; *t1++ = *t++;
01402                         goto nextvec;
01403                     }
01404                 }
01405             }
01406             b3 += 2;
01407         }
01408     }
01409     *t2++ = *t++; *t2++ = *t++;
01410 nextvec:;
01411     }
01412     m1[1] = WORDDIF(t1,m1);
01413     if ( m1[1] == 2 ) t1 = m1;
01414     m2[1] = WORDDIF(t2,m2);
01415     if ( m2[1] == 2 ) t2 = m2;
01416 }
01417 else if ( bset ) {
01418     m1 = t1; *t1++ = *t; t1++;
01419     m2 = t2; *t2++ = *t; t2++;
01420     s2 = t + i; t += 2;
01421     while ( t < s2 ) {
01422         WORD *b3 = bss;
01423         while ( b3 < bns ) {
01424             if ( b3[1] == CVECTOR ) {
01425                 SETS set = Sets+b3[0]; WORD i;
01426                 for ( i = set->first; i < set->last; i++ ) {
01427                     if ( SetElements[i] == *t ) {
01428                         *t1++ = *t++; *t1++ = *t++;
01429                         goto nextvec2;
01430                     }
01431                 }
01432             }
01433             b3 += 2;
01434         }
01435         *t2++ = *t++; *t2++ = *t++;
01436 nextvec2:;
01437     }
01438     m1[1] = WORDDIF(t1,m1);
01439     if ( m1[1] == 2 ) t1 = m1;
01440     m2[1] = WORDDIF(t2,m2);
01441     if ( m2[1] == 2 ) t2 = m2;
01442 }
01443 else {
01444     NCOPY(t2,t,i);
01445 }
01446 }
01447 else if ( *t == DOTPRODUCT ) {
01448     if ( ( b < bStop && *b == *t ) || bwild ) {
01449         m1 = t1; *t1++ = *t; t1++;
01450         m2 = t2; *t2++ = *t; t2++;
01451         if ( b >= bStop || *b != *t ) { bb = b; s1 = b; }
01452         else {
01453             s1 = b + b[1]; bb = b + 2;
01454         }
01455         s2 = t + i; t += 2;
01456         while ( t < s2 && ( bb < s1 || bwild || bset ) ) {
01457             while ( bb < s1 && ( *bb < *t ||
01458                 ( *bb == *t && bb[1] < t[1] ) ) ) bb += 3;
01459             if ( bb < s1 && *bb == *t && bb[1] == t[1] ) {
01460                 *t1++ = *t++; *t1++ = *t++; *t1++ = *t++; bb += 3;
01461                 goto nextdot;
01462             }
01463             else if ( bwild ) {
01464                 bind = bbb;
01465                 while ( bind < binst ) {
01466                     if ( *bind == *t || *bind == t[1] ) {

```

```

01467             *t1++ = *t++; *t1++ = *t++; *t1++ = *t++;
01468             goto nextdot;
01469         }
01470         bind++;
01471     }
01472 }
01473 if ( bset ) {
01474     WORD *b3 = bss;
01475     while ( b3 < bns ) {
01476         if ( b3[1] == CVECTOR ) {
01477             SETS set = Sets+b3[0]; WORD i;
01478             for ( i = set->first; i < set->last; i++ ) {
01479                 if ( SetElements[i] == *t || SetElements[i] == t[1] ) {
01480                     *t1++ = *t++; *t1++ = *t++; *t1++ = *t++;
01481                     goto nextdot;
01482                 }
01483             }
01484         }
01485         b3 += 2;
01486     }
01487 }
01488 *t2++ = *t++; *t2++ = *t++; *t2++ = *t++;
01489 nextdot:;
01490 }
01491 while ( t < s2 ) *t2++ = *t++;
01492 m1[1] = WORDDIF(t1,m1);
01493 if ( m1[1] == 2 ) t1 = m1;
01494 m2[1] = WORDDIF(t2,m2);
01495 if ( m2[1] == 2 ) t2 = m2;
01496 }
01497 else if ( bset ) {
01498     m1 = t1; *t1++ = *t; t1++;
01499     m2 = t2; *t2++ = *t; t2++;
01500     s2 = t + i; t += 2;
01501     while ( t < s2 ) {
01502         WORD *b3 = bss;
01503         while ( b3 < bns ) {
01504             if ( b3[1] == CVECTOR ) {
01505                 SETS set = Sets+b3[0]; WORD i;
01506                 for ( i = set->first; i < set->last; i++ ) {
01507                     if ( SetElements[i] == *t || SetElements[i] == t[1] ) {
01508                         *t1++ = *t++; *t1++ = *t++; *t1++ = *t++;
01509                         goto nextdot2;
01510                     }
01511                 }
01512             }
01513             b3 += 2;
01514         }
01515         *t2++ = *t++; *t2++ = *t++; *t2++ = *t++;
01516 nextdot2:;
01517     }
01518     m1[1] = WORDDIF(t1,m1);
01519     if ( m1[1] == 2 ) t1 = m1;
01520     m2[1] = WORDDIF(t2,m2);
01521     if ( m2[1] == 2 ) t2 = m2;
01522 }
01523 else { NCOPY(t2,t,i); }
01524 }
01525 else if ( *t == SYMBOL ) {
01526     if ( b < bStop && *b == *t ) {
01527         m1 = t1; *t1++ = *t; t1++;
01528         m2 = t2; *t2++ = *t; t2++;
01529         s1 = b + b[1]; bb = b+2;
01530         s2 = t + i; t += 2;
01531         while ( bb < s1 && t < s2 ) {
01532             while ( bb < s1 && *bb < *t ) bb += 2;
01533             if ( bb >= s1 ) {
01534                 if ( bset ) goto TrySymbolSet;
01535                 break;
01536             }
01537             if ( *bb == *t ) { *t1++ = *t++; *t1++ = *t++; }
01538             else if ( bset ) {
01539                 WORD *bbb;
01540 TrySymbolSet:
01541                 bbb = bss;
01542                 while ( bbb < bns ) {
01543                     if ( bbb[1] == CSYMBOL ) { /* Set of symbols */
01544                         SETS set = Sets+bbb[0]; WORD i;
01545                         for ( i = set->first; i < set->last; i++ ) {
01546                             if ( SetElements[i] == *t ) {
01547                                 *t1++ = *t++; *t1++ = *t++;
01548                                 goto NextSymbol;
01549                             }
01550                         }
01551                     }
01552                     bbb += 2;
01553                 }

```

```

01554             *t2++ = *t++; *t2++ = *t++;
01555         }
01556         else { *t2++ = *t++; *t2++ = *t++; }
01557 NextSymbol;;
01558     }
01559     while ( t < s2 ) *t2++ = *t++;
01560     m1[1] = WORDDIF(t1,m1);
01561     if ( m1[1] == 2 ) t1 = m1;
01562     m2[1] = WORDDIF(t2,m2);
01563     if ( m2[1] == 2 ) t2 = m2;
01564 }
01565 else if ( bset ) {
01566     WORD *bbb;
01567     m1 = t1; *t1++ = *t; t1++;
01568     m2 = t2; *t2++ = *t; t2++;
01569     s2 = t + i; t += 2;
01570     while ( t < s2 ) {
01571         bbb = bss;
01572         while ( bbb < bns ) {
01573             if ( bbb[1] == CSYMBOL ) { /* Set of symbols */
01574                 SETS set = Sets+bbb[0]; WORD i;
01575                 for ( i = set->first; i < set->last; i++ ) {
01576                     if ( SetElements[i] == *t ) {
01577                         *t1++ = *t++; *t1++ = *t++;
01578                         goto NextSymbol2;
01579                     }
01580                 }
01581             }
01582             bbb += 2;
01583         }
01584         *t2++ = *t++; *t2++ = *t++;
01585 NextSymbol2;;
01586     }
01587     m1[1] = WORDDIF(t1,m1);
01588     if ( m1[1] == 2 ) t1 = m1;
01589     m2[1] = WORDDIF(t2,m2);
01590     if ( m2[1] == 2 ) t2 = m2;
01591 }
01592 else { NCOPY(t2,t,i); }
01593 }
01594 else {
01595     NCOPY(t2,t,i);
01596 }
01597 }
01598 if ( ( i = WORDDIF(tStop,t) ) > 0 ) NCOPY(t2,t,i);
01599 if ( AR.BracketOn < 0 ) {
01600     s1 = t1; t1 = t2; t2 = s1;
01601 }
01602 do { *t2++ = *t++; } while ( t < (WORD *)tStopa );
01603 t = AT.WorkPointer;
01604 i = WORDDIF(t1,term1);
01605 *t++ = 4 + i + WORDDIF(t2,term2);
01606 t += i;
01607 *t++ = HAAKJE;
01608 *t++ = 3;
01609 *t++ = 0; /* This feature won't be used for a while */
01610 i = WORDDIF(t2,term2);
01611 t1 = term2;
01612 if ( i > 0 ) NCOPY(t,t1,i);
01613
01614 AT.WorkPointer = t;
01615
01616 return(0);
01617 }
01618
01619 /*
01620     #] PutBracket :
01621     #[ SpecialCleanup :
01622 */
01623
01624 void SpecialCleanup(PHEAD0)
01625 {
01626     GETBIDENTITY
01627     if ( AT.previousEfactor ) M_free(AT.previousEfactor,"Efactor cache");
01628     AT.previousEfactor = 0;
01629 }
01630
01631 /*
01632     #] SpecialCleanup :
01633     #[ SetMods :
01634 */
01635
01636 #ifndef WITHPTHREADS
01637 void SetMods(void)
01638 {
01639     int i, n;

```

```

01641     if ( AN.cmod != 0 ) M_free(AN.cmod,"AN.cmod");
01642     n = ABS(AN.ncmod);
01643     AN.cmod = (UWORD *)Malloc1(sizeof(WORD)*n,"AN.cmod");
01644     for ( i = 0; i < n; i++ ) AN.cmod[i] = AC.cmod[i];
01645 }
01646
01647 #endif
01648
01649 /*
01650     #] SetMods :
01651     #[ UnSetMods :
01652 */
01653
01654 #ifndef WITHPTHREADS
01655
01656 void UnSetMods(void)
01657 {
01658     if ( AN.cmod != 0 ) M_free(AN.cmod,"AN.cmod");
01659     AN.cmod = 0;
01660 }
01661
01662 #endif
01663
01664 /*
01665     #] UnSetMods :
01666     #] DoExecute :
01667     #[ Expressions :
01668     #[ ExchangeExpressions :
01669 */
01670
01671 void ExchangeExpressions(int num1, int num2)
01672 {
01673     GETIDENTITY
01674     WORD node1, node2, namesize, TMproto[SUBEXPSIZE];
01675     INDEXENTRY *ind;
01676     EXPRESSIONS e1, e2;
01677     LONG a;
01678     SBYTE *s1, *s2;
01679     int i;
01680     e1 = Expressions + num1;
01681     e2 = Expressions + num2;
01682     node1 = e1->node;
01683     node2 = e2->node;
01684     AC.exprnames->namenode[node1].number = num2;
01685     AC.exprnames->namenode[node2].number = num1;
01686     a = e1->name; e1->name = e2->name; e2->name = a;
01687     namesize = e1->namesize; e1->namesize = e2->namesize; e2->namesize = namesize;
01688     e1->node = node2;
01689     e2->node = node1;
01690     if ( e1->status == STOREDEXPRESSION ) {
01691     /*
01692         Find the name in the index and replace by the new name
01693     */
01694         TMproto[0] = EXPRESSION;
01695         TMproto[1] = SUBEXPSIZE;
01696         TMproto[2] = num1;
01697         TMproto[3] = 1;
01698         { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
01699         AT.TMaddr = TMproto;
01700         ind = FindInIndex(num1,&AR.StoreData,0,0);
01701         s1 = (SBYTE *) (AC.exprnames->namebuffer+e1->name);
01702         i = e1->namesize;
01703         s2 = ind->name;
01704         NCOPY(s2,s1,i);
01705         *s2 = 0;
01706         SeekFile(AR.StoreData.Handle,&(e1->onfile),SEEK_SET);
01707         if ( WriteFile(AR.StoreData.Handle,(UBYTE *)ind,
01708             (LONG)(sizeof(INDEXENTRY)) != sizeof(INDEXENTRY) ) {
01709             MesPrint("File error while exchanging expressions");
01710             Terminate(-1);
01711         }
01712         FlushFile(AR.StoreData.Handle);
01713     }
01714     if ( e2->status == STOREDEXPRESSION ) {
01715     /*
01716         Find the name in the index and replace by the new name
01717     */
01718         TMproto[0] = EXPRESSION;
01719         TMproto[1] = SUBEXPSIZE;
01720         TMproto[2] = num2;
01721         TMproto[3] = 1;
01722         { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
01723         AT.TMaddr = TMproto;
01724         ind = FindInIndex(num1,&AR.StoreData,0,0);
01725         s1 = (SBYTE *) (AC.exprnames->namebuffer+e2->name);
01726         i = e2->namesize;
01727         s2 = ind->name;

```

```

01728     NCOPY(s2,s1,i);
01729     *s2 = 0;
01730     SeekFile(AR.StoreData.Handle,&(e2->onfile),SEEK_SET);
01731     if ( WriteFile(AR.StoreData.Handle,(UBYTE *)ind,
01732 (LONG)(sizeof(INDEXENTRY)) != sizeof(INDEXENTRY) ) {
01733         MesPrint("File error while exchanging expressions");
01734         Terminate(-1);
01735     }
01736     FlushFile(AR.StoreData.Handle);
01737 }
01738 }
01739
01740 /*
01741     #] ExchangeExpressions :
01742     #[ GetFirstBracket :
01743 */
01744
01745 int GetFirstBracket(WORD *term, int num)
01746 {
01747     /*
01748         Gets the first bracket of the expression 'num'
01749         Puts it in term. If no brackets the answer is one.
01750         Routine should be thread-safe
01751     */
01752     GETIDENTITY
01753     POSITION position, oldposition;
01754     RENUMBER renumber;
01755     FILEHANDLE *fi;
01756     WORD type, *oldcomppointer, oldonefile, numword;
01757     WORD *t, *tstop;
01758
01759     oldcomppointer = AR.CompressPointer;
01760     type = Expressions[num].status;
01761     if ( type == STOREDEXPRESSION ) {
01762         WORD TMproto[SUBEXPSIZE];
01763         TMproto[0] = EXPRESSION;
01764         TMproto[1] = SUBEXPSIZE;
01765         TMproto[2] = num;
01766         TMproto[3] = 1;
01767         { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
01768         AT.TMaddr = TMproto;
01769         PUTZERO(position);
01770         if ( ( renumber = GetTable(num,&position,0) ) == 0 ) {
01771             MesCall("GetFirstBracket");
01772             SETERROR(-1)
01773         }
01774         if ( GetFromStore(term,&position,renumber,&numword,num) < 0 ) {
01775             MesCall("GetFirstBracket");
01776             SETERROR(-1)
01777         }
01778     /*
01779     #ifdef WITHPTHREADS
01780     */
01781         if ( renumber->symb.lo != AN.dummyrenumlist )
01782             M_free(renumber->symb.lo,"VarSpace");
01783         M_free(renumber,"Renummer");
01784     /*
01785     #endif
01786     */
01787     }
01788     else { /* Active expression */
01789         oldonefile = AR.GetOneFile;
01790         if ( type == HIDDENLEXPRESSION || type == HIDDENEXPRESSION ) {
01791             AR.GetOneFile = 2; fi = AR.hidefile;
01792         }
01793         else {
01794             AR.GetOneFile = 0; fi = AR.infile;
01795         }
01796         if ( fi->handle >= 0 ) {
01797             PUTZERO(oldposition);
01798         /*
01799             SeekFile(fi->handle,&oldposition,SEEK_CUR);
01800         */
01801         }
01802         else {
01803             SETBASEPOSITION(oldposition,fi->POfill-fi->PObuffer);
01804         }
01805         position = AS.OldOnFile[num];
01806         if ( GetOneTerm(BHEAD term,fi,&position,1) < 0
01807         || ( GetOneTerm(BHEAD term,fi,&position,1) < 0 ) ) {
01808             MLOCK(ErrorMessageLock);
01809             MesCall("GetFirstBracket");
01810             MUNLOCK(ErrorMessageLock);
01811             SETERROR(-1)
01812         }
01813         if ( fi->handle >= 0 ) {
01814     /*

```

```

01815         SeekFile(fi->handle,&oldposition,SEEK_SET);
01816         if ( ISNEGPOS(oldposition) ) {
01817             MLOCK(ErrorMessageLock);
01818             MesPrint("File error");
01819             MUNLOCK(ErrorMessageLock);
01820             SETERROR(-1)
01821         }
01822     /*
01823     }
01824     else {
01825         fi->POfill = fi->PObuffer+BASEPOSITION(oldposition);
01826     }
01827     AR.GetOneFile = olddonefile;
01828 }
01829 AR.CompressPointer = oldcomppointer;
01830 if ( *term ) {
01831     tstop = term + *term; tstop -= ABS(tstop[-1]);
01832     t = term + 1;
01833     while ( t < tstop ) {
01834         if ( *t == HAAKJE ) break;
01835         t += t[1];
01836     }
01837     if ( t >= tstop ) {
01838         term[0] = 4; term[1] = 1; term[2] = 1; term[3] = 3;
01839     }
01840     else {
01841         *t++ = 1; *t++ = 1; *t++ = 3; *term = t - term;
01842     }
01843 }
01844 else {
01845     term[0] = 4; term[1] = 1; term[2] = 1; term[3] = 3;
01846 }
01847 return(*term);
01848 }
01849
01850 /*
01851     #] GetFirstBracket :
01852     #[ GetFirstTerm :
01853 */
01854
01864 int GetFirstTerm(WORD *term, int num, int pre)
01865 {
01866     GETIDENTITY
01867     POSITION position, oldposition;
01868     RENUMBER renumber;
01869     FILEHANDLE *fi;
01870     WORD type, *oldcomppointer, olddonefile, numword;
01871
01872     oldcomppointer = AR.CompressPointer;
01873     type = Expressions[num].status;
01874     if ( type == STOREDEXPRESSION ) {
01875         WORD TMproto[SUBEXPSIZE];
01876         TMproto[0] = EXPRESSION;
01877         TMproto[1] = SUBEXPSIZE;
01878         TMproto[2] = num;
01879         TMproto[3] = 1;
01880         { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
01881         AT.TMaddr = TMproto;
01882         PUTZERO(position);
01883         if ( ( renumber = GetTable(num,&position,0) ) == 0 ) {
01884             MesCall("GetFirstTerm");
01885             SETERROR(-1)
01886         }
01887         if ( GetFromStore(term,&position,renumber,&numword,num) < 0 ) {
01888             MesCall("GetFirstTerm");
01889             SETERROR(-1)
01890         }
01891     }
01892     /*
01893     #ifdef WITHPTHREADS
01894     */
01895     if ( renumber->symb.lo != AN.dummyrenumlist )
01896         M_free(renumber->symb.lo,"VarSpace");
01897     M_free(renumber,"Renummer");
01898     /*
01899     #endif
01900     */
01901     }
01902     else {
01903         /* Active expression */
01904         olddonefile = AR.GetOneFile;
01905         if ( type == HIDDENLEXPRESSION || type == HIDDENEXPRESSION ) {
01906             AR.GetOneFile = 2; fi = AR.hidefile;
01907         }
01908         else {
01909             AR.GetOneFile = 0;
01910             if ( Expressions[num].replace == NEWLYDEFINEDEXPRESSION ) {
01911                 /* During execution, if the expression has already been processed it
01912                    will be in the outfile. If it has not, the usage is illegal according

```

```

01911         to the manual, though no error is given. */
01912         if ( pre == 0 ) { fi = AR.outfile; }
01913         /* During preprocessing, the expression certainly has not been processed
01914         yet. Print an error and terminate. */
01915         else {
01916             MesPrint("&isnumerical: expression is not yet defined!");
01917             SETERROR(-1);
01918         }
01919     }
01920     else {
01921         /* During execution, we should use the definition as stored at the end
01922         of the previous module. This is in the infile. */
01923         if ( pre == 0 ) { fi = AR.infile; }
01924         /* During preprocessing, this function is called before the RevertScratch
01925         at the beginning of this module's execution. Thus the expressions are
01926         in the outfile of the previous module. */
01927         else { fi = AR.outfile; }
01928     }
01929 }
01930 if ( fi->handle >= 0 ) {
01931     PUTZERO(oldposition);
01932 /*
01933     SeekFile(fi->handle,&oldposition,SEEK_CUR);
01934 */
01935 }
01936 else {
01937     SETBASEPOSITION(oldposition,fi->POfill-fi->PObuffer);
01938 }
01939 position = AS.OldOnFile[num];
01940 if ( GetOneTerm(BHEAD term,fi,&position,1) < 0
01941 || ( GetOneTerm(BHEAD term,fi,&position,1) < 0 ) ) {
01942     MLOCK(ErrorMessageLock);
01943     MesCall("GetFirstTerm");
01944     MUNLOCK(ErrorMessageLock);
01945     SETERROR(-1)
01946 }
01947 if ( fi->handle >= 0 ) {
01948 /*
01949     SeekFile(fi->handle,&oldposition,SEEK_SET);
01950     if ( ISNEGPOS(oldposition) ) {
01951         MLOCK(ErrorMessageLock);
01952         MesPrint("File error");
01953         MUNLOCK(ErrorMessageLock);
01954         SETERROR(-1)
01955     }
01956 */
01957 }
01958 else {
01959     fi->POfill = fi->PObuffer+BASEPOSITION(oldposition);
01960 }
01961 AR.GetOneFile = oldonefile;
01962 }
01963 AR.CompressPointer = oldcomppointer;
01964 return(*term);
01965 }
01966 /*
01967 #] GetFirstTerm :
01968 #[ GetContent :
01969 */
01970
01971 int GetContent(WORD *content, int num)
01972 {
01973 /*
01974     Gets the content of the expression 'num'
01975     Puts it in content.
01976     Routine should be thread-safe
01977     The content is defined as the term that will make the expression 'num'
01978     with integer coefficients, no GCD and all common factors taken out,
01979     all negative powers removed when we divide the expression by this
01980     content.
01981 */
01982
01983     GETIDENTITY
01984     POSITION position, oldposition;
01985     RENUMBER renumber;
01986     FILEHANDLE *fi;
01987     WORD type, *oldcomppointer, oldonefile, numword, *term, i;
01988     WORD *cbuffer = TermMalloc("GetContent");
01989     WORD *oldworkpointer = AT.WorkPointer;
01990
01991     oldcomppointer = AR.CompressPointer;
01992     type = Expressions[num].status;
01993     if ( type == STOREDEXPRESSION ) {
01994         WORD TMproto[SUBEXPSIZE];
01995         TMproto[0] = EXPRESSION;
01996         TMproto[1] = SUBEXPSIZE;
01997         TMproto[2] = num;

```



```

01998     TMproto[3] = 1;
01999     { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
02000     AT.TMaddr = TMproto;
02001     PUTZERO(position);
02002     if ( ( renumber = GetTable(num,&position,0) ) == 0 ) goto CalledFrom;
02003     if ( GetFromStore(cbuffer,&position,renumber,&numword,num) < 0 ) goto CalledFrom;
02004     for(;;) {
02005         term = oldworkpointer;
02006         AR.CompressPointer = oldcomppointer;
02007         if ( GetFromStore(term,&position,renumber,&numword,num) < 0 ) goto CalledFrom;
02008         if ( *term == 0 ) break;
02009     /*
02010         'merge' the two terms
02011     */
02012         if ( ContentMerge(BHEAD cbuffer,term) < 0 ) goto CalledFrom;
02013     }
02014     /*
02015     #ifdef WITHPTHREADS
02016     */
02017     if ( renumber->symb.lo != AN.dummyrenumlist )
02018         M_free(renumber->symb.lo,"VarSpace");
02019     M_free(renumber,"Renumber");
02020     /*
02021     #endif
02022     */
02023     }
02024     else { /* Active expression */
02025         oldonefile = AR.GetOneFile;
02026         if ( type == HIDDENLEXPRESSION || type == HIDDENGEXPRESSION ) {
02027             AR.GetOneFile = 2; fi = AR.hidefile;
02028         }
02029         else {
02030             AR.GetOneFile = 0;
02031             if ( Expressions[num].replace == NEWLYDEFINEDEXPRESSSION )
02032                 fi = AR.outfile;
02033             else fi = AR.infile;
02034         }
02035         if ( fi->handle >= 0 ) {
02036             PUTZERO(oldposition);
02037         /*
02038             SeekFile(fi->handle,&oldposition,SEEK_CUR);
02039         */
02040         }
02041         else {
02042             SETBASEPOSITION(oldposition,fi->POfill-fi->PObuffer);
02043         }
02044         position = AS.OldOnFile[num];
02045         if ( GetOneTerm(BHEAD cbuffer,fi,&position,1) < 0 ) goto CalledFrom;
02046         AR.CompressPointer = oldcomppointer;
02047         if ( GetOneTerm(BHEAD cbuffer,fi,&position,1) < 0 ) goto CalledFrom;
02048     /*
02049         Now go through the terms. For each term we have to test whether
02050         what is in cbuffer is also in that term. If not, we have to remove
02051         it from cbuffer. Additionally we have to accumulate the GCD of the
02052         numerators and the LCM of the denominators. This is all done in the
02053         routine ContentMerge.
02054     */
02055     for(;;) {
02056         term = oldworkpointer;
02057         AR.CompressPointer = oldcomppointer;
02058         if ( GetOneTerm(BHEAD term,fi,&position,1) < 0 ) goto CalledFrom;
02059         if ( *term == 0 ) break;
02060     /*
02061         'merge' the two terms
02062     */
02063         if ( ContentMerge(BHEAD cbuffer,term) < 0 ) goto CalledFrom;
02064     }
02065     if ( fi->handle < 0 ) {
02066         fi->POfill = fi->PObuffer+BASEPOSITION(oldposition);
02067     }
02068     AR.GetOneFile = oldonefile;
02069     }
02070     AR.CompressPointer = oldcomppointer;
02071     for ( i = 0; i < *cbuffer; i++ ) content[i] = cbuffer[i];
02072     TermFree(cbuffer,"GetContent");
02073     AT.WorkPointer = oldworkpointer;
02074     return(*content);
02075 CalledFrom:
02076     MLOCK(ErrorMessageLock);
02077     MesCall("GetContent");
02078     MUNLOCK(ErrorMessageLock);
02079     SETERROR(-1)
02080 }
02081 /*
02082 #] GetContent :
02083 #[ CleanupTerm :
02084

```

```

02085
02086     Removes noncommuting objects from the term
02087 */
02088
02089 int CleanupTerm(WORD *term)
02090 {
02091     WORD *tstop, *t, *tfill, *tt;
02092     GETSTOP(term,tstop);
02093     t = term+1;
02094     while ( t < tstop ) {
02095         if ( *t >= FUNCTION && ( functions[*t-FUNCTION].commute || *t == DENOMINATOR ) ) {
02096             tfill = t; tt = t + t[1]; tstop = term + *term;
02097             while ( tt < tstop ) *tfill++ = *tt++;
02098             *term = tfill - term;
02099             tstop -= ABS(tfill[-1]);
02100         }
02101         else {
02102             t += t[1];
02103         }
02104     }
02105     return(0);
02106 }
02107
02108 /*
02109     #] CleanupTerm :
02110     #[ ContentMerge :
02111 */
02112
02113 WORD ContentMerge(PHEAD WORD *content, WORD *term)
02114 {
02115     GETBIDENTITY
02116     WORD *cstop, csize, crsize, sign = 1, numsize, densize, i, tnsz, tdsz;
02117     UWORD *num, *den, *tnum, *tden;
02118     WORD *outfill, *outb = TermMalloc("ContentMerge"), *ct;
02119     WORD *t, *tstop, tsz, trsz, *told;
02120     WORD *t1, *t2, *c1, *c2, i1, i2, *out1;
02121     WORD didsymbol = 0, diddotp = 0, tfirst;
02122     cstop = content + *content;
02123     csize = cstop[-1];
02124     if ( csize < 0 ) { sign = -sign; csize = -csize; }
02125     cstop -= csize;
02126     numsize = densize = crsize = (csize-1)/2;
02127     num = NumberMalloc("ContentMerge");
02128     den = NumberMalloc("ContentMerge");
02129     for ( i = 0; i < numsize; i++ ) num[i] = (UWORD) (cstop[i]);
02130     for ( i = 0; i < densize; i++ ) den[i] = (UWORD) (cstop[i+crsize]);
02131     while ( num[numsize-1] == 0 ) numsize--;
02132     while ( den[densize-1] == 0 ) densize--;
02133 /*
02134     First we do the coefficient
02135 */
02136     tstop = term + *term;
02137     tsz = tstop[-1];
02138     if ( tsz < 0 ) tsz = -tsz;
02139 /* else { sign = 1; } */
02140     tstop = tstop - tsz;
02141     tnsz = tdsz = trsz = (tsz-1)/2;
02142     tnum = (UWORD *)tstop; tden = (UWORD *) (tstop + trsz);
02143     while ( tnum[tnsz-1] == 0 ) tnsz--;
02144     while ( tden[tdsz-1] == 0 ) tdsz--;
02145     GcdLong(BHEAD num, numsize, tnum, tnsz, num, &numsize);
02146     if ( LcmLong(BHEAD den, densize, tden, tdsz, den, &densize) ) goto CalledFrom;
02147     outfill = outb + 1;
02148     ct = content + 1;
02149     t = term + 1;
02150     while ( ct < cstop ) {
02151         switch ( *ct ) {
02152             case SYMBOL:
02153                 didsymbol = 1;
02154                 t = term+1;
02155                 while ( t < tstop && *t != *ct ) t += t[1];
02156                 if ( t >= tstop ) break;
02157                 t1 = t+2; t2 = t+t[1];
02158                 c1 = ct+2; c2 = ct+ct[1];
02159                 out1 = outfill; *outfill++ = *ct; outfill++;
02160                 while ( c1 < c2 && t1 < t2 ) {
02161                     if ( *c1 == *t1 ) {
02162                         if ( t1[1] <= c1[1] ) {
02163                             *outfill++ = *t1++; *outfill++ = *t1++;
02164                             c1 += 2;
02165                         }
02166                     }
02167                     else {
02168                         *outfill++ = *c1++; *outfill++ = *c1++;
02169                         t1 += 2;
02170                     }
02171                 }
02172             else if ( *c1 < *t1 ) {

```

```

02172             if ( c1[1] < 0 ) {
02173                 *outfill++ = *c1++; *outfill++ = *c1++;
02174             }
02175             else { c1 += 2; }
02176         }
02177         else {
02178             if ( t1[1] < 0 ) {
02179                 *outfill++ = *t1++; *outfill++ = *t1++;
02180             }
02181             else t1 += 2;
02182         }
02183     }
02184     while ( c1 < c2 ) {
02185         if ( c1[1] < 0 ) { *outfill++ = c1[0]; *outfill++ = c1[1]; }
02186         c1 += 2;
02187     }
02188     while ( t1 < t2 ) {
02189         if ( t1[1] < 0 ) { *outfill++ = t1[0]; *outfill++ = t1[1]; }
02190         t1 += 2;
02191     }
02192     out1[1] = outfill - out1;
02193     if ( out1[1] == 2 ) outfill = out1;
02194     break;
02195 case DOTPRODUCT:
02196     diddotp = 1;
02197     t = term+1;
02198     while ( t < tstop && *t != *ct ) t += t[1];
02199     if ( t >= tstop ) break;
02200     t1 = t+2; t2 = t+t[1];
02201     c1 = ct+2; c2 = ct+ct[1];
02202     out1 = outfill; *outfill++ = *ct; outfill++;
02203     while ( c1 < c2 && t1 < t2 ) {
02204         if ( *c1 == *t1 && c1[1] == t1[1] ) {
02205             if ( t1[2] <= c1[2] ) {
02206                 *outfill++ = *t1++; *outfill++ = *t1++; *outfill++ = *t1++;
02207                 c1 += 3;
02208             }
02209             else {
02210                 *outfill++ = *c1++; *outfill++ = *c1++; *outfill++ = *c1++;
02211                 t1 += 3;
02212             }
02213         }
02214         else if ( *c1 < *t1 || ( *c1 == *t1 && c1[1] < t1[1] ) ) {
02215             if ( c1[2] < 0 ) {
02216                 *outfill++ = *c1++; *outfill++ = *c1++; *outfill++ = *c1++;
02217             }
02218             else { c1 += 3; }
02219         }
02220         else {
02221             if ( t1[2] < 0 ) {
02222                 *outfill++ = *t1++; *outfill++ = *t1++; *outfill++ = *t1++;
02223             }
02224             else t1 += 3;
02225         }
02226     }
02227     while ( c1 < c2 ) {
02228         if ( c1[2] < 0 ) { *outfill++ = c1[0]; *outfill++ = c1[1]; *outfill++ = c1[1]; }
02229         c1 += 3;
02230     }
02231     while ( t1 < t2 ) {
02232         if ( t1[2] < 0 ) { *outfill++ = t1[0]; *outfill++ = t1[1]; *outfill++ = t1[1]; }
02233         t1 += 3;
02234     }
02235     out1[1] = outfill - out1;
02236     if ( out1[1] == 2 ) outfill = out1;
02237     break;
02238 case INDEX:
02239     t = term+1;
02240     while ( t < tstop && *t != *ct ) t += t[1];
02241     if ( t >= tstop ) break;
02242     t1 = t+2; t2 = t+t[1];
02243     c1 = ct+2; c2 = ct+ct[1];
02244     out1 = outfill; *outfill++ = *ct; outfill++;
02245     while ( c1 < c2 && t1 < t2 ) {
02246         if ( *c1 == *t1 ) {
02247             *outfill++ = *c1++;
02248             t1 += 1;
02249         }
02250         else if ( *c1 < *t1 ) { c1 += 1; }
02251         else { t1 += 1; }
02252     }
02253     out1[1] = outfill - out1;
02254     if ( out1[1] == 2 ) outfill = out1;
02255     break;
02256 case VECTOR:
02257 case DELTA:
02258     t = term+1;

```

```

02259         while ( t < tstop && *t != *ct ) t += t[1];
02260         if ( t >= tstop ) break;
02261         t1 = t+2; t2 = t+t[1];
02262         c1 = ct+2; c2 = ct+ct[1];
02263         out1 = outfill; *outfill++ = *ct; outfill++;
02264         while ( c1 < c2 && t1 < t2 ) {
02265             if ( *c1 == *t1 && c1[1] && t1[1] ) {
02266                 *outfill++ = *c1++; *outfill++ = *c1++;
02267                 t1 += 2;
02268             }
02269             else if ( *c1 < *t1 || ( *c1 == *t1 && c1[1] < t1[1] ) ) {
02270                 c1 += 2;
02271             }
02272             else {
02273                 t1 += 2;
02274             }
02275         }
02276         out1[1] = outfill - out1;
02277         if ( out1[1] == 2 ) outfill = out1;
02278         break;
02279     case GAMMA:
02280     default:          /* Functions */
02281         told = t;
02282         t = term+1;
02283         while ( t < tstop ) {
02284             if ( *t != *ct ) { t += t[1]; continue; }
02285             if ( ct[1] != t[1] ) { t += t[1]; continue; }
02286             if ( ct[2] != t[2] ) { t += t[1]; continue; }
02287             t1 = t; t2 = ct; i1 = t1[1]; i2 = t2[1];
02288             while ( i1 > 0 ) {
02289                 if ( *t1 != *t2 ) break;
02290                 t1++; t2++; i1--;
02291             }
02292             if ( i1 != 0 ) { t += t[1]; continue; }
02293             t1 = t;
02294             for ( i = 0; i < i2; i++ ) { *outfill++ = *t++; }
02295             /*
02296             Mark as 'used'. The flags must be different!
02297             */
02298             t1[2] |= SUBTERMUSED1;
02299             ct[2] |= SUBTERMUSED2;
02300             t = told;
02301             break;
02302         }
02303         break;
02304     }
02305     ct += ct[1];
02306 }
02307 if ( diddotp == 0 ) {
02308     t = term+1; while ( t < tstop && *t != DOTPRODUCT ) t += t[1];
02309     if ( t < tstop ) { /* now we need the negative powers */
02310         tfirst = 1; told = outfill;
02311         for ( i = 2; i < t[1]; i += 3 ) {
02312             if ( t[i+2] < 0 ) {
02313                 if ( tfirst ) { *outfill++ = DOTPRODUCT; *outfill++ = 0; tfirst = 0; }
02314                 *outfill++ = t[i]; *outfill++ = t[i+1]; *outfill++ = t[i+2];
02315             }
02316         }
02317         if ( outfill > told ) told[1] = outfill-told;
02318     }
02319 }
02320 if ( didsymbol == 0 ) {
02321     t = term+1; while ( t < tstop && *t != SYMBOL ) t += t[1];
02322     if ( t < tstop ) { /* now we need the negative powers */
02323         tfirst = 1; told = outfill;
02324         for ( i = 2; i < t[1]; i += 2 ) {
02325             if ( t[i+1] < 0 ) {
02326                 if ( tfirst ) { *outfill++ = SYMBOL; *outfill++ = 0; tfirst = 0; }
02327                 *outfill++ = t[i]; *outfill++ = t[i+1];
02328             }
02329         }
02330         if ( outfill > told ) told[1] = outfill-told;
02331     }
02332 }
02333 /*
02334 Now put the coefficient back.
02335 */
02336 if ( numsize < densize ) {
02337     for ( i = numsize; i < densize; i++ ) num[i] = 0;
02338     numsize = densize;
02339 }
02340 else if ( densize < numsize ) {
02341     for ( i = densize; i < numsize; i++ ) den[i] = 0;
02342     densize = numsize;
02343 }
02344 for ( i = 0; i < numsize; i++ ) *outfill++ = num[i];
02345 for ( i = 0; i < densize; i++ ) *outfill++ = den[i];

```

```

02346     csize = numsize+densize+1;
02347     if ( sign < 0 ) csize = -csize;
02348     *outfill++ = csize;
02349     *outb = outfill-outb;
02350     NumberFree(den,"ContentMerge");
02351     NumberFree(num,"ContentMerge");
02352     for ( i = 0; i < *outb; i++ ) content[i] = outb[i];
02353     TermFree(outb,"ContentMerge");
02354 /*
02355     Now we have to 'restore' the term to its original.
02356     We do not restore the content, because if anything was used the
02357     new content overwrites the old. 6-mar-2018 JV
02358 */
02359     t = term + 1;
02360     while ( t < tstop ) {
02361         if ( *t >= FUNCTION ) t[2] &= ~SUBTERMUSED1;
02362         t += t[1];
02363     }
02364     return(*content);
02365 CalledFrom:
02366     MLOCK(ErrorMessageLock);
02367     MesCall("GetContent");
02368     MUNLOCK(ErrorMessageLock);
02369     SETERROR(-1)
02370 }
02371
02372 /*
02373     #] ContentMerge :
02374     #[ TermsInExpression :
02375 */
02376
02377 LONG TermsInExpression(WORD num)
02378 {
02379     LONG x = Expressions[num].counter;
02380     if ( x >= 0 ) return(x);
02381     return(-1);
02382 }
02383
02384 /*
02385     #] TermsInExpression :
02386     #[ SizeOfExpression :
02387 */
02388
02389 LONG SizeOfExpression(WORD num)
02390 {
02391     LONG x = (LONG) (DIVPOS(Expressions[num].size,sizeof(WORD)));
02392     if ( x >= 0 ) return(x);
02393     return(-1);
02394 }
02395
02396 /*
02397     #] SizeOfExpression :
02398     #[ UpdatePositions :
02399 */
02400
02401 void UpdatePositions(void)
02402 {
02403     EXPRESSIONS e = Expressions;
02404     POSITION *oldw;
02405     WORD *oldv;
02406     int i;
02407     if ( NumExpressions > 0 &&
02408         ( AS.OldOnFile == 0 || AS.NumOldOnFile < NumExpressions ) ) {
02409         if ( AS.OldOnFile ) {
02410             oldw = AS.OldOnFile;
02411             AS.OldOnFile = (POSITION *)Malloca1(NumExpressions*sizeof(POSITION),"file pointers");
02412             for ( i = 0; i < AS.NumOldOnFile; i++ ) AS.OldOnFile[i] = oldw[i];
02413             AS.NumOldOnFile = NumExpressions;
02414             M_free(oldw,"process file pointers");
02415         }
02416         else {
02417             AS.OldOnFile = (POSITION *)Malloca1(NumExpressions*sizeof(POSITION),"file pointers");
02418             AS.NumOldOnFile = NumExpressions;
02419         }
02420     }
02421     if ( NumExpressions > 0 &&
02422         ( AS.OldNumFactors == 0 || AS.NumOldNumFactors < NumExpressions ) ) {
02423         if ( AS.OldNumFactors ) {
02424             oldw = AS.OldNumFactors;
02425             AS.OldNumFactors = (WORD *)Malloca1(NumExpressions*sizeof(WORD),"numfactors pointers");
02426             for ( i = 0; i < AS.NumOldNumFactors; i++ ) AS.OldNumFactors[i] = oldw[i];
02427             M_free(oldw,"numfactors pointers");
02428             oldv = AS.Oldvflags;
02429             AS.Oldvflags = (WORD *)Malloca1(NumExpressions*sizeof(WORD),"vflags pointers");
02430             for ( i = 0; i < AS.NumOldNumFactors; i++ ) AS.Oldvflags[i] = oldv[i];
02431             M_free(oldw,"vflags pointers");
02432             oldw = AS.Oldvflags;

```

```

02433         AS.Oldduflags = (WORD *)Malloca1(NumExpressions*sizeof(WORD),"uflags pointers");
02434         for ( i = 0; i < AS.NumOldNumFactors; i++ ) AS.Oldduflags[i] = oldw[i];
02435         M_free(oldw,"uflags pointers");
02436         AS.NumOldNumFactors = NumExpressions;
02437     }
02438     else {
02439         AS.OldNumFactors = (WORD *)Malloca1(NumExpressions*sizeof(WORD),"numfactors pointers");
02440         AS.Oldvflags = (WORD *)Malloca1(NumExpressions*sizeof(WORD),"vflags pointers");
02441         AS.Oldduflags = (WORD *)Malloca1(NumExpressions*sizeof(WORD),"uflags pointers");
02442         AS.NumOldNumFactors = NumExpressions;
02443     }
02444 }
02445 for ( i = 0; i < NumExpressions; i++ ) {
02446     AS.OldOnFile[i] = e[i].onfile;
02447     AS.OldNumFactors[i] = e[i].numfactors;
02448     AS.Oldvflags[i] = e[i].vflags;
02449     AS.Oldduflags[i] = e[i].uflags;
02450 }
02451 }
02452
02453 /*
02454     #] UpdatePositions :
02455     #[ CountTerms1 :      LONG CountTerms1()
02456
02457     Counts the terms in the current deferred bracket
02458     Is mainly an adaptation of the routine Deferred in proces.c
02459 */
02460
02461 LONG CountTerms1(PHEAD0)
02462 {
02463     GETBIDENTITY
02464     POSITION oldposition, startposition;
02465     WORD *t, *m, *mstop, decr, i, *oldwork, retval;
02466     WORD *oldipointer = AR.CompressPointer;
02467     WORD oldGetOneFile = AR.GetOneFile, olddeferflag = AR.DeferFlag;
02468     LONG numterms = 0;
02469     AR.GetOneFile = 1;
02470     oldwork = AT.WorkPointer;
02471     AT.WorkPointer = (WORD *)((UBYTE *) (AT.WorkPointer)) + AM.MaxTer;
02472     AR.DeferFlag = 0;
02473     startposition = AR.DefPosition;
02474 /*
02475     Store old position
02476 */
02477     if ( AR.infile->handle >= 0 ) {
02478         PUTZERO(oldposition);
02479 /*
02480         SeekFile(AR.infile->handle,&oldposition,SEEK_CUR);
02481 */
02482     }
02483     else {
02484         SETBASEPOSITION(oldposition,AR.infile->Pofill-AR.infile->Pobuffer);
02485         AR.infile->Pofill = (WORD *)((UBYTE *) (AR.infile->Pobuffer)
02486             +BASEPOSITION(startposition));
02487     }
02488 /*
02489     Look in the CompressBuffer where the bracket contents start
02490 */
02491     t = m = AR.CompressBuffer;
02492     t += *t;
02493     mstop = t - ABS(t[-1]);
02494     m++;
02495     while ( *m != HAAKJE && m < mstop ) m += m[1];
02496     if ( m >= mstop ) { /* No deferred action! */
02497         numterms = 1;
02498         AR.DeferFlag = olddeferflag;
02499         AT.WorkPointer = oldwork;
02500         AR.GetOneFile = oldGetOneFile;
02501         return(numterms);
02502     }
02503     mstop = m + m[1];
02504     decr = WORDDIFF(mstop,AR.CompressBuffer)-1;
02505
02506     m = AR.CompressBuffer;
02507     t = AR.CompressPointer;
02508     i = *m;
02509     NCOPY(t,m,i);
02510     AR.TePos = 0;
02511     AN.TeSuOut = 0;
02512 /*
02513     Status:
02514     First bracket content starts at mstop.
02515     Next term starts at startposition.
02516     Decompression information is in AR.CompressPointer.
02517     The outside of the bracket runs from AR.CompressBuffer+1 to mstop.
02518 */
02519     AR.CompressPointer = oldipointer;

```

```

02520     for(;;) {
02521         numterms++;
02522         retval = GetOneTerm(BHEAD AT.WorkPointer,AR.infile,&startposition,0);
02523         if ( retval >= 0 ) AR.CompressPointer = olddipointer;
02524         if ( retval <= 0 ) break;
02525         t = AR.CompressPointer;
02526         if ( *t < (1 + decr + ABS(*(t+t-1))) ) break;
02527         t++;
02528         m = AR.CompressBuffer+1;
02529         while ( m < mstop ) {
02530             if ( *m != *t ) goto Thatsit;
02531             m++; t++;
02532         }
02533     }
02534 Thatsit;;
02535 /*
02536     Finished. Reposition the file, restore information and return.
02537 */
02538 AT.WorkPointer = oldwork;
02539 if ( AR.infile->handle >= 0 ) {
02540 /*
02541     SeekFile(AR.infile->handle,&oldposition,SEEK_SET);
02542 */
02543 }
02544 else {
02545     AR.infile->POfill = AR.infile->PObuffer + BASEPOSITION(oldposition);
02546 }
02547 AR.DeferFlag = olddeferflag;
02548 AR.GetOneFile = oldGetOneFile;
02549 return(numterms);
02550 }
02551 /*
02552 #] CountTerms1 :
02553 #[ TermsInBracket :    LONG TermsInBracket(term,level)
02554
02555 The function TermsInBracket_()
02556 Syntax:
02557     TermsInBracket_() : The current bracket in a Keep Brackets
02558     TermsInBracket_(bracket) : This bracket in the current expression
02559     TermsInBracket_(expression,bracket) : This bracket in the given expression
02560 All other specifications don't have any effect.
02561 */
02562 #define CURRENTBRACKET 1
02563 #define BRACKETCURRENTEXPR 2
02564 #define BRACKETOTHEREXPR 3
02565 #define NOBRACKETACTIVE 4
02566
02567 LONG TermsInBracket(PHEAD WORD *term, WORD level)
02568 {
02569     WORD *t, *tstop, *b, *tt, *nl, *n2;
02570     int type = 0, i, num;
02571     LONG numterms = 0;
02572     WORD *bracketbuffer = AT.WorkPointer;
02573     t = term; GETSTOP(t,tstop);
02574     t++; b = bracketbuffer;
02575     while ( t < tstop ) {
02576         if ( *t != TERMSINBRACKET ) { t += t[1]; continue; }
02577         if ( t[1] == FUNHEAD || (
02578             t[1] == FUNHEAD+2
02579             && t[FUNHEAD] == -SNUMBER
02580             && t[FUNHEAD+1] == 0
02581         ) ) {
02582             if ( AC.ComDefer == 0 ) {
02583                 type = NOBRACKETACTIVE;
02584             }
02585             else {
02586                 type = CURRENTBRACKET;
02587             }
02588             *b = 0;
02589             break;
02590         }
02591         if ( t[FUNHEAD] == -EXPRESSION ) {
02592             if ( t[FUNHEAD+2] < 0 ) {
02593                 if ( ( t[FUNHEAD+2] <= -FUNCTION ) && ( t[1] == FUNHEAD+3 ) ) {
02594                     type = BRACKETOTHEREXPR;
02595                     *b++ = FUNHEAD+4; *b++ = -t[FUNHEAD+2]; *b++ = FUNHEAD;
02596                     for ( i = 2; i < FUNHEAD; i++ ) *b++ = 0;
02597                     *b++ = 1; *b++ = 1; *b++ = 3;
02598                     break;
02599                 }
02600                 else if ( ( t[FUNHEAD+2] > -FUNCTION ) && ( t[1] == FUNHEAD+4 ) ) {
02601                     type = BRACKETOTHEREXPR;
02602                     tt = t + FUNHEAD+2;
02603                     switch ( *tt ) {
02604                         case -SYMBOL:

```

```

02607             *b++ = 8; *b++ = SYMBOL; *b++ = 4; *b++ = tt[1];
02608             *b++ = 1; *b++ = 1; *b++ = 1; *b++ = 3;
02609             break;
02610         case -SNUMBER:
02611             if ( tt[1] == 1 ) {
02612                 *b++ = 4; *b++ = 1; *b++ = 1; *b++ = 3;
02613             }
02614             else goto IllBraReq;
02615             break;
02616         default:
02617             goto IllBraReq;
02618     }
02619     break;
02620 }
02621 }
02622 else if ( ( t[FUNHEAD+2] == (t[1]-FUNHEAD-2) ) &&
02623          ( t[FUNHEAD+2+ARGHEAD] == (t[FUNHEAD+2]-ARGHEAD) ) ) {
02624     type = BRACKETOTHEREXP;
02625     tt = t + FUNHEAD + ARGHEAD; num = *tt;
02626     for ( i = 0; i < num; i++ ) *b++ = *tt++;
02627     break;
02628 }
02629 }
02630 else {
02631     if ( t[FUNHEAD] < 0 ) {
02632         if ( ( t[FUNHEAD] <= -FUNCTION ) && ( t[1] == FUNHEAD+1 ) ) {
02633             type = BRACKETCURRENTEXPR;
02634             *b++ = FUNHEAD+4; *b++ = -t[FUNHEAD+2]; *b++ = FUNHEAD;
02635             for ( i = 2; i < FUNHEAD; i++ ) *b++ = 0;
02636             *b++ = 1; *b++ = 1; *b++ = 3; *b = 0;
02637             break;
02638         }
02639         else if ( ( t[FUNHEAD] > -FUNCTION ) && ( t[1] == FUNHEAD+2 ) ) {
02640             type = BRACKETCURRENTEXPR;
02641             tt = t + FUNHEAD+2;
02642             switch ( *tt ) {
02643                 case -SYMBOL:
02644                     *b++ = 8; *b++ = SYMBOL; *b++ = 4; *b++ = tt[1];
02645                     *b++ = 1; *b++ = 1; *b++ = 1; *b++ = 3;
02646                     break;
02647                 case -SNUMBER:
02648                     if ( tt[1] == 1 ) {
02649                         *b++ = 4; *b++ = 1; *b++ = 1; *b++ = 3;
02650                     }
02651                     else goto IllBraReq;
02652                     break;
02653                 default:
02654                     goto IllBraReq;
02655             }
02656             break;
02657         }
02658     }
02659     else if ( ( t[FUNHEAD] == (t[1]-FUNHEAD) ) &&
02660              ( t[FUNHEAD+ARGHEAD] == (t[FUNHEAD]-ARGHEAD) ) ) {
02661         type = BRACKETCURRENTEXPR;
02662         tt = t + FUNHEAD + ARGHEAD; num = *tt;
02663         for ( i = 0; i < num; i++ ) *b++ = *tt++;
02664         break;
02665     }
02666     else {
02667 IllBraReq:;
02668         MLOCK(ErrorMessageLock);
02669         MesPrint("Illegal bracket request in termsinbracket_ function.");
02670         MUNLOCK(ErrorMessageLock);
02671         Terminate(-1);
02672     }
02673 }
02674 t += t[1];
02675 }
02676 AT.WorkPointer = b;
02677 if ( AT.WorkPointer + *term + 4 > AT.WorkTop ) {
02678     MLOCK(ErrorMessageLock);
02679     MesWork();
02680     MesPrint("Called from termsinbracket_ function.");
02681     MUNLOCK(ErrorMessageLock);
02682     return(-1);
02683 }
02684 /*
02685 We are now in the position to look for the bracket
02686 */
02687 switch ( type ) {
02688     case CURRENTBRACKET:
02689 /*
02690     The code here should be rather similar to when we pick up
02691     the contents of the bracket. In our case we only count the
02692     terms though.
02693 */

```



```


02694         numterms = CountTerms1(BHEAD0);
02695         break;
02696     case BRACKETCURRENTEXPR:
02697     /*
02698         Not implemented yet.
02699     */
02700         MLOCK(ErrorMessageLock);
02701         MesPrint("termsinbracket_ function currently only handles Keep Brackets.");
02702         MUNLOCK(ErrorMessageLock);
02703         return(-1);
02704     case BRACKETOTHEREXPR:
02705         MLOCK(ErrorMessageLock);
02706         MesPrint("termsinbracket_ function currently only handles Keep Brackets.");
02707         MUNLOCK(ErrorMessageLock);
02708         return(-1);
02709     case NOBRACKETACTIVE:
02710         numterms = 1;
02711         break;
02712 }
02713 /*
02714 Now we have the number in numterms. We replace the function by it.
02715 */
02716 n1 = term; n2 = AT.WorkPointer; tstop = n1 + *n1;
02717 while ( n1 < t ) *n2++ = *n1++;
02718 i = numterms » BITSINWORD;
02719 if ( i == 0 ) {
02720     *n2++ = LNUMBER; *n2++ = 4; *n2++ = 1; *n2++ = (WORD)(numterms & WORDMASK);
02721 }
02722 else {
02723     *n2++ = LNUMBER; *n2++ = 5; *n2++ = 2;
02724     *n2++ = (WORD)(numterms & WORDMASK); *n2++ = i;
02725 }
02726 n1 += n1[1];
02727 while ( n1 < tstop ) *n2++ = *n1++;
02728 AT.WorkPointer[0] = n2 - AT.WorkPointer;
02729 AT.WorkPointer = n2;
02730 if ( Generator(BHEAD n1,level) < 0 ) {
02731     AT.WorkPointer = bracketbuffer;
02732     MLOCK(ErrorMessageLock);
02733     MesPrint("Called from termsinbracket_ function.");
02734     MUNLOCK(ErrorMessageLock);
02735     return(-1);
02736 }
02737 /*
02738 Finished. Reset things and return.
02739 */
02740 AT.WorkPointer = bracketbuffer;
02741 return(numterms);
02742 }
02743 /*
02744 #] TermsInBracket :      LONG TermsInBracket(term,level)
02745 #] Expressions :
02746 */

```

4.33 extcmd.c File Reference

```
#include "form3.h"
```

Include dependency graph for extcmd.c:

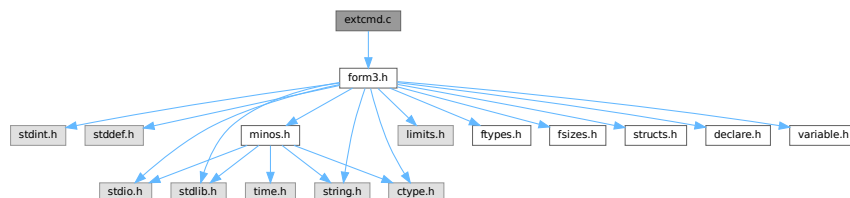

Functions

- int [openExternalChannel](#) (UBYTE *cmd, int daemonize, UBYTE *shellname, UBYTE *stderrname)

- int [initPresetExternalChannels](#) (UBYTE *theline, int thetimeout)
- int [closeExternalChannel](#) (int n)
- int [selectExternalChannel](#) (int n)
- int [getCurrentExternalChannel](#) (void)
- void [closeAllExternalChannels](#) (void)

4.33.1 Detailed Description

The system that takes care of communication with external programs.

Definition in file [extcmd.c](#).

4.33.2 Function Documentation

4.33.2.1 openExternalChannel()

```
int openExternalChannel (
    UBYTE * cmd,
    int daemonize,
    UBYTE * shellname,
    UBYTE * stderrname )
```

Definition at line [230](#) of file [extcmd.c](#).

4.33.2.2 initPresetExternalChannels()

```
int initPresetExternalChannels (
    UBYTE * theline,
    int thetimeout )
```

Definition at line [232](#) of file [extcmd.c](#).

4.33.2.3 closeExternalChannel()

```
int closeExternalChannel (
    int n )
```

Definition at line [233](#) of file [extcmd.c](#).

4.33.2.4 selectExternalChannel()

```
int selectExternalChannel (
    int n )
```

Definition at line [234](#) of file [extcmd.c](#).

4.33.2.5 getCurrentExternalChannel()

```
int getCurrentExternalChannel (
    void )
```

Definition at line 235 of file [extcmd.c](#).

4.33.2.6 closeAllExternalChannels()

```
void closeAllExternalChannels (
    void )
```

Definition at line 236 of file [extcmd.c](#).

4.34 extcmd.c

[Go to the documentation of this file.](#)

```
00001
00005 /* #[] License : */
00006 /*
00007 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 * When using this file you are requested to refer to the publication
00009 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 * This is considered a matter of courtesy as the development was paid
00011 * for by FOM the Dutch physics granting agency and we would like to
00012 * be able to track its scientific use to convince FOM of its value
00013 * for the community.
00014 *
00015 * This file is part of FORM.
00016 *
00017 * FORM is free software: you can redistribute it and/or modify it under the
00018 * terms of the GNU General Public License as published by the Free Software
00019 * Foundation, either version 3 of the License, or (at your option) any later
00020 * version.
00021 *
00022 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 * details.
00026 *
00027 * You should have received a copy of the GNU General Public License along
00028 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[] License : */
00031 /*
00032 #[] Documentation :
00033
00034 This module is written by M.Tentyukov as a part of implementation of
00035 interaction between FORM and external processes, first release
00036 09.04.2004. A part of this code is copied from the DIANA project, which was
00037 written by M. Tentyukov and published under the GPL version 2 as
00038 published by the Free Software Foundation.
00039
00040 This file is completely re-written by M.Tentyukov in May 2006.
00041 Since the interface was changed, the public function were changed,
00042 also. A new public functions were added: initPresetExternalChannels()
00043 (see comments just before this function in the present file) and
00044 setKillModeForExternalChannel (a pointer, not a function).
00045
00046 If a macro WITHEXTERNALCHANNEL is not defined, all public functions
00047 are stubs returning failure.
00048
00049 The idea is to start an external command swallowing
00050 its stdin and stdout. This can be done by means of the function
00051 int openExternalChannel(cmd,daemonize,shellname,stderrname), where
00052 cmd is a command to run,
00053 daemonize: if !=0 then start the command in the "daemon" mode,
00054 shellname: if !=NULL, execute the command in a subshell,
00055 stderrname: if != NULL, redirect stderr of the command to this file.
00056 The function returns some small positive integer number (the
00057 descriptor of a newly created external channel), or -1 on failure.
00058
```

```

00059     After the command is started, it becomes a _current_ opened external
00060     channel. The buffer can be sent to its stdin by a function
00061     int writeBufToExtChannel(buf, n)
00062     (here buf is a pointer to the buffer, n is the length in bytes; the
00063     function returns 0 in success, or -1 on failure),
00064     or one character can be read from its stdout by
00065     means of the function
00066     int getcFromExtChannel().
00067
00068     The latter returns the
00069     character casted to integer, or something <0. This can be -2 (if there
00070     is no current external channel) or EOF, if the external program closes
00071     its stdout, or if the external program outputs a string coinciding
00072     with a _terminator_.
00073
00074     By default, the terminator is an empty line. For the current external
00075     channel it can be set by means of the function
00076     int setTerminatorForExternalChannel(newterminator).
00077     The function returns 0 in success, or !0 if something is wrong (no
00078     current channel, too long terminator).
00079
00080     After getcFromExtChannel() returns EOF, the current channel becomes
00081     undefined. Any further attempts to read information by
00082     getcFromExtChannel() result in -2. To set (re-set) a current channel,
00083     the function
00084     int selectExternalChannel(n)
00085     can be used. This function accepts the valid external channel
00086     descriptor (returned by openExternalChannel) and returns the
00087     descriptor of a previous current channel (0, if there was no current
00088     channel, or -1, if the external channel descriptor is invalid).
00089     If n == 0, the function undefine the current external channel.
00090
00091     The function
00092     int closeExternalChannel(n)
00093     destroys the opened external channel with the descriptor n. It returns
00094     0 in success, or -1 on failure. If the corresponding external channel
00095     was the current one, the current channel becomes undefined. If n==0,
00096     the function closes the current external channel.
00097
00098     The function
00099     int getCurrentExternalChannel(void)
00100     returns the descriptor if the current external channel, or 0 , if
00101     there is no current external channel.
00102
00103     The function
00104     void closeAllExternalChannels(void)
00105
00106     destroys all opened external channels.
00107
00108     List of all public functions:
00109     int openExternalChannel(UBYTE *cmd,int daemonize,UBYTE *shellname, UBYTE * stderrname);
00110     int initPresetExternalChannels(UBYTE *theline, int thetimeout);
00111     int setTerminatorForExternalChannel(char *newterminator);
00112     int setKillModeForExternalChannel(int signum, int sentToWholeGroup);
00113     int closeExternalChannel(int n);
00114     int selectExternalChannel(int n);
00115     int writeBufToExtChannel(char *buf,int n);
00116     int getcFromExtChannel(void);
00117     int getCurrentExternalChannel(void);
00118     void closeAllExternalChannels(void);
00119
00120     ATTENTION!
00121
00122     Four of them:
00123     1 setTerminatorForExternalChannel
00124     2 setKillModeForExternalChannel
00125     3 writeBufToExtChannel
00126     4 getcFromExtChannel
00127
00128     are NOT functions, but variables (pointers) of a corresponding type.
00129     They are initialised by proper values to avoid repeated error checking.
00130
00131     All public functions are independent of realization hidden in this module.
00132     All other functions may have a returned type/parameters type local w.r.t.
00133     this module; they are not declared outside of this file.
00134
00135     #] Documentation :
00136     #[ Selftest initializing:
00137 */
00138
00139 /*
00140 Uncomment to get a self-consistent program:
00141 #define SELFTEST 1
00142 */
00143
00144
00145 #ifndef SELFTEST

```

```

00146 #define WITHEXTERNALCHANNEL 1
00147 #ifdef _MSC_VER
00148 #define FORM_INLINE __inline
00149 #else
00150 #define FORM_INLINE inline
00151 #endif
00152
00153 /*
00154     From form3.h:
00155 */
00156 typedef unsigned char UBYTE;
00157
00158 /*The following variables should be defined in variable.h:*/
00159 extern int (*writeBufToExtChannel)(char *buffer, size_t n);
00160 extern int (*getcFromExtChannel)();
00161 extern int (*setTerminatorForExternalChannel)(char *buffer);
00162 extern int (*setKillModeForExternalChannel)(int signum, int sentToWholeGroup);
00163
00164 #else /*ifdef SELFTEST*/
00165 #include "form3.h"
00166 #endif /*ifdef SELFTEST ... else*/
00167 /*
00168 pid_t getExternalChannelPid(void);
00169 */
00170 /*
00171     #] Selftest initializing:
00172     #[ Includes :
00173 */
00174 #ifdef WITHEXTERNALCHANNEL
00175 #include <stdio.h>
00176 #ifndef _MSC_VER
00177 #include <unistd.h>
00178 #endif
00179 #include <fcntl.h>
00180 #include <sys/types.h>
00181 #ifndef _MSC_VER
00182 #include <sys/time.h>
00183 #include <sys/wait.h>
00184 #endif
00185 #include <errno.h>
00186 #include <signal.h>
00187 #include <limits.h>
00188 /*
00189     #] Includes :
00190     #[ FailureFunctions:
00191 */
00192
00193 /*Non-initialized variant of public functions:*/
00194 int writeBufToExtChannelFailure(char *buf, size_t count)
00195 {
00196     DUMMYUSE(buf); DUMMYUSE(count);
00197     return(-1);
00198 } /*writeBufToExtChannelFailure*/
00199
00200 int setTerminatorForExternalChannelFailure(char *newTerminator)
00201 {
00202     DUMMYUSE(newTerminator);
00203     return(-1);
00204 } /*setTerminatorForExternalChannelFailure*/
00205
00206 int setKillModeForExternalChannelFailure(int signum, int sentToWholeGroup)
00207 {
00208     DUMMYUSE(signum); DUMMYUSE(sentToWholeGroup);
00209     return(-1);
00210 } /*setKillModeForExternalChannelFailure*/
00211
00212 int getcFromExtChannelFailure(void)
00213 {
00214     return(-2);
00215 } /*getcFromExtChannelFailure*/
00216
00217 int (*writeBufToExtChannel)(char *buffer, size_t n) = &writeBufToExtChannelFailure;
00218 int (*setTerminatorForExternalChannel)(char *buffer) =
00219     &setTerminatorForExternalChannelFailure;
00220 int (*setKillModeForExternalChannel)(int signum, int sentToWholeGroup) =
00221     &setKillModeForExternalChannelFailure;
00222 int (*getcFromExtChannel)(void) = &getcFromExtChannelFailure;
00223 #endif
00224 /*
00225     #] FailureFunctions:
00226     #[ Stubs :
00227 */
00228 #ifndef WITHEXTERNALCHANNEL
00229 /*Stubs for public functions:*/
00230 int openExternalChannel(UBYTE *cmd, int daemonize, UBYTE *shellname, UBYTE *stderrname)
00231 { DUMMYUSE(cmd); DUMMYUSE(daemonize); DUMMYUSE(shellname); DUMMYUSE(stderrname); return(-1); };
00232 int initPresetExternalChannels(UBYTE *theline, int thetimeout) { DUMMYUSE(theline);

```

```

        DUMMYUSE(thetimeout); return(-1); };
00233 int closeExternalChannel(int n) { DUMMYUSE(n); return(-1); };
00234 int selectExternalChannel(int n) { DUMMYUSE(n); return(-1); };
00235 int getCurrentExternalChannel(void) { return(0); };
00236 void closeAllExternalChannels(void) {};
00237 #else /*ifndef WITHEXTERNALCHANNEL*/
00238 /*
00239     #] Stubs :
00240     #[ Local types :
00241 */
00242 /*First argument for the function signal:*/
00243 #ifndef INTSIGHANDLER
00244 typedef void (*mysighandler_t)(int);
00245 #else
00246 /* Sometimes, this nonsense may occurs:*/
00247 /*typedef int (*mysighandler_t)(int);*/
00248 #endif
00249
00250 /*Input IO buffer size increment -- each time the buffer
00251 is expired it will be increased by this value (in bytes):*/
00252 #define DELTA_EXT_BUF 128
00253
00254 /*Re-allocatable array containing External Channel
00255 handlers increased each time by this value:*/
00256 #define DELTA_EXT_LIST 8
00257
00258 /*How many times I/O routines may attempt to continue their work
00259 in some failures:*/
00260 #define MAX_FAILS_IO 2
00261
00262 /*The external channel handler structure:*/
00263 typedef struct ExternalChannel {
00264     pid_t pid;          /*PID of the external process*/
00265     pid_t gpid;         /*process group ID of the external process.
00266                          If <=0, not used, if >0, the kill signals
00267                          is sent to the whole group */
00268     FILE *frec;         /*stdout of the external process*/
00269     char *INbuf;        /*External channel buffer*/
00270     char *IBfill;       /*Position in INbuf from which the next input character will be read*/
00271     char *IBfull;       /*End of read INbuf*/
00272     char *IBstop;       /*end of allocated space for INbuf*/
00273     char *terminator;   /* Terminator - when extern. program outputs ONLY this string,
00274                          it is assumed that the answer is ready, and getcFromExtChannel
00275                          returns EOF. Should not be longer then the minimal buffer!*/
00276     /*Info fields, not changable after creating a channel:*/
00277     char *cmd;          /*the command*/
00278     char *shellname;
00279     char *stderrname;   /*filename to redirect stderr, or NULL*/
00280     int fsend;          /*stdin of the external process*/
00281     int killSignal;     /*signal to kill*/
00282     int daemonize;      /*0 --neither setsid nor daemonize, !=0 -- full daemonization*/
00283 } EXTHANDLE;
00284
00285
00286 static EXTHANDLE *externalChannelsList=0;
00287 /*Here integers are better than pointers: */
00288 static int externalChannelsListStop=0;
00289 static int externalChannelsListFill=0;
00290
00291 /*"current" external channel:*/
00292 static EXTHANDLE *externalChannelsListTop=0;
00293 /*
00294     #] Local types :
00295     #[ Selftest functions :
00296 */
00297 #ifdef SELFTEST
00298
00299 /*For malloc prototype:*/
00300 #include <stdlib.h>
00301
00302 /*StrLen, Malloc1, M_free and strDup1 are defined in tools.c -- here only emulation:*/
00303 int StrLen(char *pattern)
00304 {
00305     register char *p=(char*)pattern;
00306     while(*p)p++;
00307     return((int) ((p-(char*)pattern)) );
00308 }/*StrLen*/
00309 void *Malloc1(int l, char *c)
00310 {
00311     return(malloc(l));
00312 }
00313 void M_free(void *p,char *c)
00314 {
00315     return(free(p));
00316 }
00317
00318 char *strDup1(UBYTE *instring, char *ifwrong)

```

```

00319 {
00320     UBYTE *s = instring, *to;
00321     while ( *s ) s++;
00322     to = s = (UBYTE *)Malloca((s-instring)+1,ifwong);
00323     while ( *instring ) *to++ = *instring++;
00324     *to = 0;
00325     return(s);
00326 }
00327
00328 /*PutPreVar from pre.c -- just ths stub:*/
00329 int PutPreVar(UBYTE *a,UBYTE *b,UBYTE *c,int i)
00330 {
00331     return(0);
00332 }
00333
00334 #endif
00335 /*
00336     #] Selftest functions :
00337     #[ Local functions :
00338 */
00339
00340 /*Initialize one cell of handler:*/
00341 static FORM_INLINE void extHandlerInit(EXTHANDLE *h)
00342 {
00343     h->pid=-1;
00344     h->gpip=-1;
00345     h->fsend=0;
00346     h->killSignal=SIGKILL;
00347     h->daemonize=1;
00348     h->frec=NULL;
00349     h->INbuf=h->IBfill=h->IBfull=h->IBstop=
00350     h->terminator=h->cmd=h->shellname=h->stderrname=NULL;
00351 }/*extHandlerInit*/
00352
00353 /* Copies each field of handler:*/
00354 static FORM_INLINE void extHandlerSwallowCopy(EXTHANDLE *to, EXTHANDLE *from)
00355 {
00356     to->pid=from->pid;
00357     to->gpip=from->gpip;
00358     to->fsend=from->fsend;
00359     to->killSignal=from->killSignal;
00360     to->daemonize=from->daemonize;
00361     to->frec=from->frec;
00362     to->INbuf=from->INbuf;
00363     to->IBfill=from->IBfill;
00364     to->IBfull=from->IBfull;
00365     to->IBstop=from->IBstop;
00366     to->terminator=from->terminator;
00367     to->cmd=from->cmd;
00368     to->shellname=from->shellname;
00369     to->stderrname=from->stderrname;
00370 }/*extHandlerSwallow*/
00371
00372 /*Allocates memory for fields of handler which have no fixed
00373 storage size and initializes some fields:*/
00374 static FORM_INLINE void
00375 extHandlerAlloc(EXTHANDLE *h, char *cmd, char *shellname, char *stderrname)
00376 {
00377     h->IBfill=h->IBfull=h->INbuf=
00378         Malloca(DELTA_EXT_BUF,"External channel buffer");
00379     h->IBstop=h->INbuf+DELTA_EXT_BUF;
00380     /*Initialize a terminator:*/
00381     *(h->terminator=Malloca(DELTA_EXT_BUF,"External channel terminator"))='\n';
00382     (h->terminator)[1]='\0';/*By default the terminator is '\n'*/
00383     /*Deep copy all strings:*/
00384     if(cmd!=NULL)
00385         h->cmd=(char *)strDup1((UBYTE *)cmd,"External channel command");
00386     else/*cmd cannot be NULL! If this is NULL then force it to be something special*/
00387         h->cmd=(char *)strDup1((UBYTE *)"/","External channel command");
00388     if(shellname!=NULL)
00389         h->shellname=
00390             (char *)strDup1((UBYTE *)shellname,"External channel shell name");
00391     if(stderrname!=NULL)
00392         h->stderrname=
00393             (char *)strDup1((UBYTE *)stderrname,"External channel stderr name");
00394 }/*extHandlerAlloc*/
00395
00396 /*Deallocates dynamically allocated fields of a handler:*/
00397 static FORM_INLINE void extHandlerFree(EXTHANDLE *h)
00398 {
00399     if(h->stderrname) M_free(h->stderrname,"External channel stderr name");
00400     if(h->shellname) M_free(h->shellname,"External channel shell name");
00401     if(h->cmd) M_free(h->cmd,"External channel command");
00402     if(h->terminator)M_free(h->terminator,"External channel terminator");
00403     if(h->INbuf)M_free(h->INbuf,"External channel buffer");
00404     extHandlerInit(h);
00405 }/*extHandlerFree*/

```

```

00406 /* Closes all descriptors, kills the external process, frees all internal fields,
00407 BUT does NOT free the main container:*/
00408 static void destroyExternalChannel(EXTHANDLE *h)
00409 {
00410     /*Note, this function works in parallel mode correctly, see comments below.*/
00411
00412     /*Note, for slaves in a parallel mode h->pid == 0:*/
00413     if( (h->pid > 0) && (h->killSignal > 0) ){
00414         int chstatus;
00415         if( h->gpipid > 0)
00416             chstatus=kill(-h->gpipid,h->killSignal);
00417         else
00418             chstatus=kill(h->pid,h->killSignal);
00419         if(chstatus==0)
00420             /*If the process will not be killed by this signal, FORM hangs up here!*/
00421             waitpid(h->pid, &chstatus, 0);
00422     }/*if( (h->pid > 0) && (h->killSignal > 0) )*/
00423
00424     /*Note, for slaves in a parallel mode h->frec == h->fsend == 0:*/
00425     if(h->frec) fclose(h->frec);
00426     if( h->fsend > 0) close(h->fsend);
00427
00428     extHandlerFree(h);
00429     /*Does not do "free(h)"!*/
00430 }/*destroyExternalChannel*/
00431
00432 /*Wrapper to the read() syscall, to handle possible interrupts by unblocked signals:*/
00433 static FORM_INLINE ssize_t read2b(int fd, char *buf, size_t count)
00434 {
00435     ssize_t res;
00436
00437     if( (res=read(fd,buf,count)) <1 )/*EOF or read is interrupted by a signal?:*/
00438         while( (errno == EINTR)&&(res <1) )
00439             /*The call was interrupted by a signal before any data was read, try again:*/
00440             res=read(fd,buf,count);
00441     return (res);
00442 }/*read2b*/
00443
00444 /*Wrapper to the write() syscall, to handle possible interrupts by unblocked signals:*/
00445 static FORM_INLINE ssize_t writeFromb(int fd, char *buf, size_t count)
00446 {
00447     ssize_t res;
00448     if( (res=write(fd,buf,count)) <1 )/*Is write interrupted by a signal?:*/
00449         while( (errno == EINTR)&&(res <1) )
00450             /*The call was interrupted by a signal before any data was written, try again:*/
00451             res=write(fd,buf,count);
00452     return (res);
00453 }/*writeFromb*/
00454
00455 /* Read one (binary) PID from the file descriptor fd:*/
00456 static FORM_INLINE pid_t readpid(int fd)
00457 {
00458     pid_t tmp;
00459     if(read2b(fd, (char*)&tmp, sizeof(pid_t))!=sizeof(pid_t))
00460         return (pid_t)-1;
00461     return tmp;
00462 }/*readpid*/
00463
00464 /* Write one (binary) PID to the file descriptor fd:*/
00465 static FORM_INLINE pid_t writepid(int fd, pid_t thepid)
00466 {
00467     if(writeFromb(fd, (char*)&thepid, sizeof(pid_t))!=sizeof(pid_t))
00468         return (pid_t)-1;
00469     return (pid_t)0;
00470 }/*writepid*/
00471
00472 /*Writes exactly count bytes from the buffer buf into the descriptor fd, independently on
00473 nonblocked signals and the MPU/buffer hits. Returns 0 or -1:
00474 */
00475 static FORM_INLINE int writexactly(int fd, char *buf, size_t count)
00476 {
00477     ssize_t i;
00478     int j=0,n=0;
00479
00480     for(;;){
00481         if( (i=writeFromb(fd, buf+j, count-j)) < 0 ) return (-1);
00482         j+=i;
00483         if ( ((size_t)j) == count ) break;
00484         if(i==0)n++;
00485         else n=0;
00486         if(n>MAX_FAILS_IO)return (-1);
00487     }/*for(;;)*/
00488     return (0);
00489 }/*writexactly*/
00490
00491 /* Set the FD_CLOEXEC flag of desc if value is nonzero,
00492 or clear the flag if value is 0.

```



```

00493 Return 0 on success, or -1 on error with errno set. */
00494 static int set_cloexec_flag(int desc, int value)
00495 {
00496     int oldflags = fcntl (desc, F_GETFD, 0);
00497     /* If reading the flags failed, return error indication now.*/
00498     if (oldflags < 0)
00499         return (oldflags);
00500     /* Set just the flag we want to set. */
00501     if (value != 0)
00502         oldflags |= FD_CLOEXEC;
00503     else
00504         oldflags &= ~FD_CLOEXEC;
00505     /* Store modified flag word in the descriptor. */
00506     return (fcntl(desc, F_SETFD, oldflags));
00507 } /*set_cloexec_flag*/
00508
00509 /* Adds the integer fd to the array fifo of length top+1 so that
00510 the array is ascendantly ordered. It is supposed that all 0 -- top-1
00511 elements in the array are already ordered:*/
00512 static void pushDescriptor(int *fifo, int top, int fd)
00513 {
00514     if ( top == 0 ) {
00515         fifo[top] = fd;
00516     } else {
00517         int ins=top-1;
00518         if( fifo[ins]<=fd )
00519             fifo[top]=fd;
00520         else{
00521             /*Find the position:*/
00522             while( (ins>=0)&&(fifo[ins]>fd) )ins--;
00523             /*Move all elements starting from the position to the right:*/
00524             for(ins++;top>ins; top--)
00525                 fifo[top]=fifo[top-1];
00526             /*Put the element:*/
00527             fifo[ins]=fd;
00528         }
00529     }
00530 } /*pushDescriptor*/
00531
00532 /*Close all descriptors greater or equal than startFrom except those
00533 listed in the ascendantly ordered array usedFd of length top:*/
00534 static FORM_INLINE void closeAllDescriptors(int startFrom, int *usedFd, int top)
00535 {
00536     int n,maxfd;
00537     for(n=0;n<top; n++){
00538         maxfd=usedFd[n];
00539         for(;startFrom<maxfd;startFrom++)/*Close all less than maxfd*/
00540             close(startFrom);
00541         startFrom++;/*skip maxfd*/
00542     }/*for(;startFrom<maxfd;startFrom++)*/
00543     /*Close all the rest:*/
00544     maxfd=sysconf(_SC_OPEN_MAX);
00545     for(;startFrom<maxfd;startFrom++)
00546         close(startFrom);
00547 } /*closeAllDescriptors*/
00548
00549 typedef int L_APIPE[2];
00550 /*Closes both pipe descriptors if not -1:*/
00551 static void closepipe(L_APIPE *thepipe)
00552 {
00553     if( (*thepipe)[0] != -1) close ((*thepipe)[0]);
00554     if( (*thepipe)[1] != -1) close ((*thepipe)[1]);
00555 } /*closepipe*/
00556
00557 /*Parses the cmd line like "sh -c myprg", passes each option to the
00558 corresponding element of argv, ends agrv by NULL. Returns the
00559 number of stored argv elements, or -1 if fails:*/
00560 static FORM_INLINE int parseline(char **argv, char *cmd)
00561 {
00562     int n=0;
00563     while(*cmd != '\0'){
00564         for(; (*cmd <= ' ') && (*cmd != '\0') ;cmd++);
00565         if(*cmd != '\0'){
00566             argv[n]=cmd;
00567             while(++cmd > ' ');
00568             if(*cmd != '\0')
00569                 *cmd++ = '\0';
00570             n++;
00571         }/*if(*cmd != '\0')*/
00572     }/*while(*cmd != '\0')*/
00573     argv[n]=NULL;
00574     if(n==0)return -1;
00575     return n;
00576 } /*parseline*/
00577
00578 /*Reads positive decimal number (not bigger than maxnum)
00579 from the string and returns it;

```

```

00580  the pointer *b is set to the next non-converted character:*/
00581 static LONG str2i(char *str, char **b, LONG maxnum)
00582 {
00583     LONG n=0;
00584     /*Eat trailing spaces:*/
00585     while(*str<=' '){if(*str++ == '\0')return(-1);
00586     (*b)=str;
00587     while (*str>='0'&&*str<='9')
00588         if( (n=10*n + *str++ - '0')>maxnum )
00589             return(-1);
00590     if ((*b)==str)/*No single number!*/
00591         return(-1);
00592     (*b)=str;
00593     return(n);
00594 }
00595
00596 /*Converts long integer to a decimal representation.
00597 For portability reasons we cannot use LongCopy from tools.c
00598 since theoretically LONG may be smaller than pid_t:*/
00599 static char *l2s(LONG x, char *to)
00600 {
00601     char *s;
00602     int i = 0, j;
00603     s = to;
00604     do { *s++ = (x % 10)+'0'; i++; } while ( ( x /= 10 ) != 0 );
00605     *s-- = '\0';
00606     j = ( i - 1 ) >> 1;
00607     while ( j >= 0 ) {
00608         i = to[j]; to[j] = s[-j]; s[-j] = (char)i; j--;
00609     }
00610     return(s+1);
00611 }
00612
00613 /*like strcat() but returns the pointer to the end of the
00614 resulting string:*/
00615 static FORM_INLINE char *addStr(char *to, char *from)
00616 {
00617     while( (*to++ = *from++)!='\0' );
00618     return(to-1);
00619 }/*addStr*/
00620
00621
00622 /*Try to write (atomically) short buffer (of length count) to fd.
00623 timeout is a timeout in millisecs. Returns number of written bytes or -1:*/
00624 static FORM_INLINE ssize_t writeSome(int fd, char *buf, size_t count, int timeout)
00625 {
00626     ssize_t res = 0;
00627     fd_set wfds;
00628     struct timeval tv;
00629     int nrep=5;/*five attempts it interrupted by a non-blocking signal*/
00630     int flags = fcntl(fd, F_GETFL,0);
00631
00632     /*Add O_NONBLOCK:*/
00633     fcntl(fd,F_SETFL, flags | O_NONBLOCK);
00634     /* important -- in order to avoid blocking of short receiver buffer*/
00635
00636     do{
00637         FD_ZERO(&wfds);
00638         FD_SET(fd, &wfds);
00639         /* Wait up to timeout. */
00640
00641         tv.tv_sec =timeout /1000;
00642         tv.tv_usec = (timeout % 1000)*1000;
00643         nrep--;
00644
00645         switch(select(fd+1, NULL, &wfds, NULL, &tv)){
00646             case -1:
00647                 if((nrep == 0)|| ( errno != EINTR) ){
00648                     perror("select()");
00649                     res=-1;
00650                     nrep=0;
00651                 }/*else -- A non blocked signal was caught, just repeat*/
00652                 break;
00653             case 0:/*timeout*/
00654                 res=-1;
00655                 nrep=0;
00656                 break;
00657             default:
00658                 if( (res=write(fd,buf,count)) <0 )/*Signal?*/
00659                     while( (errno == EINTR)&&(res <0) )
00660                         res=write(fd,buf,count);
00661                 nrep=0;
00662             }/*switch*/
00663         }while(nrep);
00664
00665         /*restore the flags:*/
00666         fcntl(fd,F_SETFL, flags);

```

```

00667     return (res);
00668 }/*writeSome*/
00669
00670 /*Try to read short buffer (of length not more than count)
00671  from fd. timeout is a timeout in millisecs. Returns number
00672  of written bytes or -1: */
00673 static FORM_INLINE ssize_t readSome(int fd, char *buf, size_t count, int timeout)
00674 {
00675     ssize_t res = 0;
00676     fd_set rfd;
00677     struct timeval tv;
00678     int nrep=5; /*five attempts it interrupted by a non-blocking signal*/
00679
00680     do{
00681         FD_ZERO(&rfd);
00682         FD_SET(fd, &rfd);
00683         /* Wait up to timeout. */
00684
00685         tv.tv_sec = timeout/1000;
00686         tv.tv_usec = (timeout % 1000)*1000;
00687         nrep--;
00688
00689         switch(select(fd+1, &rfd, NULL, NULL, &tv)){
00690             case -1:
00691                 if((nrep == 0) || (errno != EINTR) ){
00692                     perror("select()");
00693                     res=-1;
00694                     nrep=0;
00695                     /*else -- A non blocked signal was caught, just repeat*/
00696                     break;
00697                 case 0: /*timeout*/
00698                     res=-1;
00699                     nrep=0;
00700                     break;
00701                 default:
00702                     if( (res=read(fd,buf,count)) <0 ) /*Signal?*/
00703                         while( (errno == EINTR)&&(res <0) )
00704                             res=read(fd,buf,count);
00705                     nrep=0;
00706                 } /*switch*/
00707             }while(nrep);
00708         return (res);
00709 }/*readSome*/
00710
00711 /*
00712  #] Local functions :
00713  #[ Ok functions:
00714  */
00715
00716 /*Copies (deep copy) newTerminator to thehandler->terminator. Returns 0 if
00717  newTerminator fits to the buffer, or !0 if it does not fit. ATT! In the
00718  latter case thehandler->terminator is NOT '\0' terminated! */
00719 int setTerminatorForExternalChannelOk(char *newTerminator)
00720 {
00721     int i=DELTA_EXT_BUF;
00722     /*
00723      No problems with externalChannelsListTop are
00724      possible since this function may be invoked only
00725      when the current channel is defined and externalChannelsListTop
00726      is set properly
00727      */
00728     char *t=externalChannelsListTop->terminator;
00729
00730     for( ; i>1; i--){
00731         if( (*t++ = *newTerminator++)=='\0' )
00732             break;
00733         /*Add trailing '\n', if absent:*/
00734         if( (i == DELTA_EXT_BUF)/newTerminator == '\0'*/
00735             || (*t-2)!='\n' ) {
00736             *(t-1)='\n'; *t='\0';
00737         }
00738         return(i==1);
00739     }/*setTerminatorForExternalChannelOk*/
00740
00741 /*Interface to change handler fields "killSignal" and "gpId"*/
00742 int setKillModeForExternalChannelOk(int signum, int sentToWholeGroup)
00743 {
00744     if(signum<0)
00745         return(-1);
00746     /*
00747      No problems with externalChannelsListTop are
00748      possible since this function may be invoked only
00749      when the current channel is defined and externalChannelsListTop
00750      is set properly
00751      */
00752     externalChannelsListTop->killSignal=signum;
00753     if(sentToWholeGroup){/*gpId must be >0*/

```

```

00754         if(externalChannelsListTop->gpId <= 0)
00755             externalChannelsListTop->gpId=-externalChannelsListTop->gpId;
00756     }else{/*gpId must be <=0*/
00757         if(externalChannelsListTop->gpId>0)
00758             externalChannelsListTop->gpId=-externalChannelsListTop->gpId;
00759     }
00760     return(0);
00761 }/*setKillModeForExternalChannelOk*/
00762
00763 /*
00764     #[] getcFromExtChannelOk
00765 */
00766 /*Returns one character from the external channel. If the input is expired,
00767 returns EOF. If the external process is finished completely, the function closes
00768 the channel (and returns EOF). If the external process was finished, the function
00769 returns EOF:*/
00770 int getcFromExtChannelOk(void)
00771 {
00772     mysighandler_t oldPIPE = 0;
00773     EXTHANDLE *h;
00774     int ret;
00775
00776     if (externalChannelsListTop->IBfill < externalChannelsListTop->IBfull)
00777         /*in buffer*/
00778         return( *(externalChannelsListTop->IBfill++) );
00779     /*else -- the buffer is empty*/
00780     ret=EOF;
00781     h= externalChannelsListTop;
00782 #ifdef WITHMPI
00783     if ( PF.me == MASTER ){
00784 #endif
00785         /* Temporary ignore this signal:*/
00786         /* if compiler fails here, try to change the definition of
00787         mysighandler_t on the beginning of this file
00788         (just define INTSIGHANDLER).*/
00789         oldPIPE=signal(SIGPIPE,SIG_IGN);
00790 #ifdef WITHMPI
00791         if( fgets(h->INbuf,h->IBstop - h->INbuf, h->frec) == 0 )/*Fail! EOF?*/
00792             *(h->INbuf)='\0';/*Empty line may not appear here!*/
00793         #else
00794         if( fgets(h->INbuf,h->IBstop - h->INbuf, h->frec) == 0)/*Fail! EOF?*/
00795             ||( *(h->INbuf) == '\0')/*Empty line? This shouldn't be!*/
00796         ){
00797             closeExternalChannel(externalChannelsListTop-externalChannelsList+1);
00798             /*Note, this code is only for the sequential mode! */
00799             goto getcFromExtChannelReady;
00800             /*Here we assume that fgets is never interrupted by singals*/
00801         }/*if( fgets(h->INbuf,h->IBstop - h->INbuf, h->frec) == 0 )*/
00802         #endif
00803 #ifdef WITHMPI
00804         }/*if ( PF.me == MASTER */
00805
00806         /*Master broadcasts result to slaves, slaves read it from the master:*/
00807         if( PF_BroadcastString((UBYTE *)h->INbuf) ){/*Fail!*/
00808             MesPrint("Fail broadcasting external channel results");
00809             Terminate(-1);
00810         }/*if( PF_BroadcastString((UBYTE *)h->INbuf) ) */
00811
00812         if( *(h->INbuf) == '\0')/*Empty line? This shouldn't be!*/
00813             closeExternalChannel(externalChannelsListTop-externalChannelsList+1);
00814         goto getcFromExtChannelReady;
00815         }/*if( *(h->INbuf) == '\0')*/
00816 #endif
00817
00818     {/*Block*/
00819         char *t=h->terminator;
00820         /*Move IBfull to the end of read line and compare the line with the terminator.
00821         Note, by construction the terminator fits to the first read line, see
00822         the function setTerminatorForExternalChannel.*/
00823         for(h->IBfull=h->INbuf; *(h->IBfull)!='\0'; (h->IBfull)++)
00824             if( *t== *(h->IBfull) )
00825                 t++;
00826             else
00827                 break;/*not a terminator*/
00828         /*Continue moving IBfull to the end of read line:*/
00829         while( *(h->IBfull)!='\0') (h->IBfull)++;
00830
00831         if( (t-h->terminator) == (h->IBfull-h->INbuf) ){
00832             /*Terminator!*/
00833             /*Reset the channel*/
00834             h->IBfull=h->IBfill=h->INbuf;
00835             externalChannelsListTop=0;/*Undefine the current channel*/
00836             writeBufToExtChannel=&writeBufToExtChannelFailure;
00837             getcFromExtChannel=&getcFromExtChannelFailure;
00838             setTerminatorForExternalChannel=&setTerminatorForExternalChannelFailure;
00839             setKillModeForExternalChannel=&setKillModeForExternalChannelFailure;
00840             goto getcFromExtChannelReady;

```

```

00841     }/*if(t == (h->IBfull-h->INbuf) )*/
00842 }/*Block*/
00843 /*Does the buffer have enough capacity?*/
00844 while( *(h->IBfull - 1) != '\n' ){/*Buffer is not enough!*/
00845     /*Extend the buffer:*/
00846     int l= (h->IBstop - h->INbuf)+DELTA_EXT_BUF;
00847     char *newbuf=Malloc1(l,"External channel buffer");
00848     /*We wouldn't like to use realloc.*/
00849     /*Copy the buffer:*/
00850     char *n=newbuf,*o=h->INbuf;
00851     while( (*n++ = *o++)!='\0' );
00852     /*Att! The order of the following operators is important!*/
00853     h->IBfull= newbuf+(h->IBfull-h->INbuf);
00854     M_free(h->INbuf,"External channel buffer");
00855     h->INbuf = newbuf;
00856     h->IBstop = h->INbuf+l;
00857 #ifdef WITHMPI
00858     if ( PF.me == MASTER ){
00859         (h->IBfull)[1]='\0';/*Will mark (h->IBfull)[1] as '!' for failure*/
00860         if( fgets(h->IBfull,h->IBstop - h->IBfull, h->frec) == 0 ){
00861             /*EOF! No trailing '\n'?*/
00862             /*Mark:*/
00863             (h->IBfull)[0]='\0';
00864             (h->IBfull)[1]='!';
00865             (h->IBfull)[2]='\0';
00866             /*The string "\0!\0" is used as an image of NULL.*/
00867             }/*if( fgets(h->IBfull,h->IBstop - h->IBfull, h->frec) == 0 )*/
00868         }/*if ( PF.me == MASTER )*/
00869
00870         /*Master broadcasts results to slaves, slaves read it from the master:*/
00871         if( PF_BroadcastString((UBYTE *)h->IBfull) ){/*Fail!*/
00872             MesPrint("Fail broadcasting external channel results");
00873             Terminate(-1);
00874         }/*if( PF_BroadcastString(h->IBfull) )*/
00875
00876         /*The string "\0!\0" is used as the image of NULL.*/
00877         if(
00878             ( (h->IBfull)[0]=='\0' )
00879             &&( (h->IBfull)[1]=='!' )
00880             &&( (h->IBfull)[2]=='\0' )
00881             )/*EOF! No trailing '\n'?*/
00882             break;
00883     #else
00884         if( fgets(h->IBfull,h->IBstop - h->IBfull, h->frec) == 0 )
00885             /*EOF! No trailing '\n'?*/
00886             break;
00887     #endif
00888     while( *(h->IBfull)!='\0' ) (h->IBfull)++;
00889 }/*while( *(h->IBfull - 1) != '\n' )*/
00890 /*In h->INbuf we have a fresh string.*/
00891 ret=*(h->IBfill=h->INbuf);
00892 h->IBfill++;/*Next time a new, isn't it?*/
00893
00894 getcFromExtChannelReady:
00895 #ifdef WITHMPI
00896     if ( PF.me == MASTER ){
00897 #endif
00898         signal(SIGPIPE,oldPIPE);
00899 #ifdef WITHMPI
00900     }/*if ( PF.me == MASTER )*/
00901 #endif
00902     return(ret);
00903 }/*getcFromExtChannelOk*/
00904 /*
00905     #] getcFromExtChannelOk
00906 */
00907 /*Writes exactly count bytes from the buffer buf to the external channel thehandler
00908 Returns 0 (on success) or -1:
00909 */
00910 int writeBufToExtChannelOk(char *buf, size_t count)
00911 {
00912
00913     int ret;
00914     mysighandler_t oldPIPE;
00915     #ifdef WITHMPI
00916         /*Only master communicates with the external program:*/
00917         if ( PF.me == MASTER ){
00918 #endif
00919             /* Temporary ignore this signal:*/
00920             /* if compiler fails here, try to change the definition of
00921                mysighandler_t on the beginning of this file
00922                (just define INTSIGHANDLER)*/
00923             oldPIPE=signal(SIGPIPE,SIG_IGN);
00924             ret=writeexactly( externalChannelsListTop->fsend, buf, count);
00925             signal(SIGPIPE,oldPIPE);
00926 #ifdef WITHMPI
00927         }else{

```

```

00928         /*Do not wait the master status: this would be too slow!*/
00929         ret=0;
00930     }
00931 #endif
00932     return(ret);
00933 }/*writeBufToExtChannel*/
00934 /*
00935     #] Ok functions:
00936     #[ do_run_cmd :
00937 */
00938 /*The function returns PID of the started command*/
00939 static FORM_INLINE pid_t do_run_cmd(
00940     int *fdsend,
00941     int *fdreceive,
00942     int *gpid, /*returns group process ID*/
00943     int tty mode,
00944     /*
00945         &8 - daemonizeing
00946         &16 - setsid()*/
00947     char *cmd,
00948     char *argv[],
00949     char *stderrname
00950 )
00951 {
00952     int fdin[2]={-1,-1}, fdout[2]={-1,-1}, fdsig[2]={-1,-1};
00953     /*initialised by -1 for possible rollback at failure, see closepipe() above*/
00954     pid_t childpid, fatherchildpid = (pid_t)0;
00955     mysighandler_t oldPIPE=NULL;
00956     if(
00957         (pipe(fdsig)!=0)/*This pipe will be used by a child to tell the father if fail.*/
00958         || (pipe(fdin)!=0)
00959         || (pipe(fdout)!=0)
00960     )goto fail_do_run_cmd;
00961     if((childpid = fork()) == -1){
00962         perror("fork");
00963         goto fail_do_run_cmd;
00964     }/*if((childpid = fork()) == -1)*/
00965     if(childpid == 0){/*Child.*/
00966         int fifo[3], top=0;
00967         /*
00968             To be thread safely we can't rely on ascendant order of opened
00969             file descriptors. So we put each of descriptor we have to
00970             preserve into the array fifo.
00971             Note, in _this_ process there are no any threads but descriptors
00972             were created in frame of the parent process which may have
00973             multiple threads.
00974         */
00975         /*Mark descriptors which will NOT be closed:*/
00976         pushDescriptor(fifo,top++,fdsig[1]);
00977         pushDescriptor(fifo,top++,fdin[0]);
00978         pushDescriptor(fifo,top++,fdout[1]);
00979         /*Close all except stdin, stdout, stderr and placed into fifo:*/
00980         closeAllDescriptors(3,fifo, top);
00981         /*Now reopen stdin and stdout.*/
00982         /*thread-safety is not a problem here since there are no any threads up to now:*/
00983         if(
00984             (close(0) == -1 )||/* Use fdin as stdin :*/
00985             (dup(fdin[0]) == -1 )||
00986             (close(1)==-1)||/* Use fdout as stdout:*/
00987             (dup(fdout[1]) == -1 )
00988         )
00989         {/*Fail!*/
00990             /*Signal to parent:*/
00991             writepid(fdsig[1],(pid_t)-2);
00992             _exit(1);
00993         }
00994         if(stderrname != NULL){
00995             if(
00996                 (close(2) != 0 )||
00997                 (open(stderrname,O_WRONLY)<0)
00998             )
00999             {/*Fail!*/
01000                 writepid(fdsig[1],(pid_t)-2);
01001                 _exit(1);
01002             }
01003             /*if(stderrname != NULL)*/
01004             if( tty mode & 16 )/* create a session and sets the process group ID */
01005                 setsid();
01006             /* */
01007         }
01008     }

```

```

01015     if(set_cloexec_flag (fdsig[1], 1)!=0){/*Error?*/
01016         /*Signal to parent:*/
01017         writepid(fdsig[1],(pid_t)-2);
01018         _exit(1);
01019     }/*if(set_cloexec_flag (fdsig[1], 1)!=0)*/
01020
01021     if( ttymode & 8 ){/*Daemonize*/
01022         int fdsig2[2];/*To check exec() success*/
01023         if(
01024             pipe(fdsig2)||
01025             (set_cloexec_flag (fdsig2[1], 1)!=0)
01026         )
01027             {/*Error?*/
01028                 /*Signal to parent:*/
01029                 writepid(fdsig[1],(pid_t)-2);
01030                 _exit(1);
01031             }
01032         set_cloexec_flag (fdsig2[0], 1);
01033         switch(childpid=fork()){
01034             case 0:/*grandchild*/
01035                 /*Execute external command:*/
01036                 execvp(cmd, argv);
01037                 /* Control can reach this point only on error!*/
01038                 writepid(fdsig2[1],(pid_t)-2);
01039                 break;
01040             case -1:
01041                 /* Control can reach this point only on error!*/
01042                 /*Inform the father about the failure*/
01043                 writepid(fdsig[1],(pid_t)-2);
01044                 _exit(1);/*The child, just exit, not return*/
01045             default:/*Son of his father*/
01046                 close(fdsig2[1]);
01047                 /*Ignore SIGPIPE (up to the end of the process):*/
01048                 signal(SIGPIPE,SIG_IGN);
01049
01050                 /*Wait on read() while the grandchild close the pipe
01051                 (on success) or send -2 (if exec() fails).*/
01052                 /*There are two possibilities:
01053                 -1 -- this is ok, the pipe was closed on exec,
01054                 the program was successfully executed;
01055                 -2 -- something is wrong, exec failed since the
01056                 grandchild sends -2 after exec.
01057                 */
01058                 if( readpid(fdsig2[0]) != (pid_t)-1 )/*something is wrong*/
01059                     writepid(fdsig[1],(pid_t)-1);
01060                 else/*ok, send PID of the grandchild to the father:*/
01061                     writepid(fdsig[1],childpid);
01062                 /*Die and free the life space for the grandchild:*/
01063                 _exit(0);/*The child, just exit, not return*/
01064             }/*switch(childpid=fork())*/
01065         }else{/*if( ttymode & 8 )*/
01066             execvp(cmd, argv);
01067             /* Control can reach this point only on error!*/
01068             writepid(fdsig[1],(pid_t)-2);
01069             _exit(2);/*The child, just exit, not return*/
01070         }/*if( ttymode & 8 )...else*/
01071     }else{/* The (grand)father*/
01072         close(fdsig[1]);
01073         /*To prevent closing fdsig in rollback:*/
01074         fdsig[1]=-1;
01075         close(fdin[0]);
01076         close(fdout[1]);
01077         *fdsend = fdin[1];
01078         *fdreceive = fdout[0];
01079
01080         /*Get the process group ID.*/
01081         /*Avoid to use getpgid() which is non-standard.*/
01082         if( ttymode & 16)/*setsid() was invoked, the child is a group leader:*/
01083             *gpid=childpid;
01084         else/*the child belongs to the same process group as the this process:*/
01085             *gpid=getpgrp();/*if compiler fails here, try getpgrp(0) instead!*/
01086         /*
01087         Rationale: getpgrp conform to POSIX.1 while 4.3BSD provides a
01088         getpgrp() function that returns the process group ID for a
01089         specified process.
01090         */
01091
01092         /* Temporary ignore this signal:*/
01093         /* if compiler fails here, try to change the definition of
01094         mysighandler_t on the beginning of this file
01095         (just define INTSIGHANDLER)*/
01096         oldPIPE=signal(SIGPIPE,SIG_IGN);
01097
01098         if( ttymode & 8 ){/*Daemonize*/
01099             /*Read the grandchild PID from the son.*/
01100             fatherchildpid=childpid;
01101             if( (childpid=readpid(fdsig[0]))<0 ){

```

```

01102             /*Daemonization process fails for some reasons!*/
01103             childpid=fatherchildpid; /*for rollback*/
01104             goto fail_do_run_cmd;
01105         }
01106     }else{
01107         /*fdsig[1] should be closed on exec and this read operation
01108         must fail on success:*/
01109         if( readpid(fdsig[0])!= (pid_t)-1 )
01110             goto fail_do_run_cmd;
01111         /*if( ttymode & 8 ) ... else*/
01112     }/*if(childpid == 0)...else*/
01113
01114     /*Here can be ONLY the father*/
01115     close(fdsig[0]);
01116     /*To prevent closing fdsig in rollback after goto fail_flnk_do_runcmd:*/
01117     fdsig[0]=-1;
01118
01119     if( ttymode & 8 ){ /*Daemonize*/
01120         int i;
01121         /*Wait while the father of a grandchild dies:*/
01122         waitpid(fatherchildpid,&i,0);
01123     }
01124
01125     /*Restore the signal:*/
01126     signal(SIGPIPE,oldPIPE);
01127
01128     return(childpid);
01129
01130     fail_do_run_cmd:
01131         closepipe(&fdout);
01132         closepipe(&fdin);
01133         closepipe(&fdsig);
01134         return((pid_t)-1);
01135 }/*do_run_cmd*/
01136 /*
01137 #] do_run_cmd :
01138 #[ run_cmd :
01139 */
01140 /*Starts the command cmd (directly, if shellpath is NULL, or in a subshell),
01141 swallowing its stdin and stdout;
01142 stderr will be re-directed to stderrname (if !=NULL). Returns PID of
01143 the started process. Stdin will be available as fdsend, and stdout
01144 will be available as fdreceive:*/
01145 static FORM_INLINE pid_t run_cmd(char *cmd,
01146                                 int *fdsend,
01147                                 int *fdreceive,
01148                                 int *gpipid,
01149                                 int daemonize,
01150                                 char *shellpath,
01151                                 char *stderrname )
01152 {
01153     char **argv;
01154     pid_t thepid;
01155
01156     cmd=(char*)strDup1((UBYTE*)cmd, "run_cmd: cmd"); /*detouch cmd*/
01157
01158
01159     /* Prepare arguments for execvp:*/
01160     if(shellpath != NULL){ /*Run in a subshell.*/
01161         int nopt;
01162         /*Allocate space which is definitely enough:*/
01163         argv=Malloc1(StrLen((UBYTE*)shellpath)*sizeof(char*)+2,"run_cmd:argv");
01164         shellpath=(char*)strDup1((UBYTE*)shellpath, "run_cmd: shellpath"); /*detouch shellpath*/
01165         /*Parse a shell (e.g., "/bin/sh -c"):*/
01166         nopt=parseline(argv, shellpath);
01167         /* and add the command as a shell argument:*/
01168         argv[nopt]=cmd;
01169         argv[nopt+1]=NULL;
01170     }else{ /*Run the command directly:*/
01171         /*Allocate space which is definitely enough:*/
01172         argv=Malloc1(StrLen((UBYTE*)cmd)*sizeof(char*)+1,"run_cmd:argv");
01173         parseline(argv, cmd);
01174     }
01175
01176     thepid=do_run_cmd(
01177         fdsend,
01178         fdreceive,
01179         gpipid,
01180         (daemonize)?(8|16):0,
01181         argv[0],
01182         argv,
01183         stderrname
01184     );
01185
01186     M_free(argv,"run_cmd:argv");
01187     if(shellpath)
01188         M_free(shellpath,"run_cmd:argv");

```



```

01189     M_free(cmd, "run_cmd: cmd");
01190
01191     return(theppid);
01192 }/*run_cmd*/
01193 /*
01194     #] run_cmd :
01195     #[ createExternalChannel :
01196 */
01197 /*The structure to pass parameters to createExternalChannel
01198 and openExternalChannel in case of preset channel (instead of
01199 shellname):*/
01200 typedef struct{
01201     int fdin;
01202     int fdout;
01203     pid_t theppid;
01204 }ECINFOSTRUCT;
01205
01206 /* Creates a new external channel starting the command cmd (if cmd !=NULL)
01207 or using information from (ECINFOSTRUCT *)shellname, if cmd ==NULL:*/
01208 static FORM_INLINE void *createExternalChannel(
01209     EXTHANDLE *h,
01210     char *cmd, /*Command to run or NULL*/
01211     /*0 --neither setsid nor daemonize, !=0 -- full daemonization:*/
01212     int daemonize,
01213     char *shellname,/* The shell (like "/bin/sh -c") or NULL*/
01214     char *stderrname/*filename to redirect stderr or NULL*/
01215 )
01216 {
01217     int fdreceive=0;
01218     int gpid = 0;
01219     ECINFOSTRUCT *psetInfo;
01220 #ifdef WITHMPI
01221     char statusbuf[2]={'\0','\0'};/*'\0' if run_cmd returns ok, '!' otherwise.*/
01222 #endif
01223     extHandlerInit(h);
01224
01225     h->pid=0;
01226
01227     if( cmd==NULL ){/*Instead of starting a new command, use preset channel:*/
01228         psetInfo=(ECINFOSTRUCT *)shellname;
01229         shellname=NULL;
01230         h->killSignal=0;
01231         h->daemonize=0;
01232     }
01233
01234     /*Create a channel:*/
01235 #ifdef WITHMPI
01236     if ( PF.me == MASTER ){
01237 #endif
01238         if(cmd!=NULL)
01239             h->pid=run_cmd (cmd, &(h->fsend),
01240                             &fdreceive,&gpid,daemonize,shellname,stderrname);
01241         else{
01242             gpid=-psetInfo->theppid;
01243             h->pid=psetInfo->theppid;
01244             h->fsend=psetInfo->fdout;
01245             fdreceive=psetInfo->fdin;
01246         }
01247 #ifdef WITHMPI
01248         if(h->pid<0)
01249             statusbuf[0]='!';/*Broadcast fail to slaves*/
01250     }
01251     /*else: Keep h->pid = 0 and h->fsend = 0 for slaves in parallel mode!*/
01252
01253     /*Master broadcasts status to slaves, slaves read it from the master:*/
01254     if( PF_BroadcastString((UBYTE *)statusbuf) ){/*Fail!*/
01255         h->pid=-1;
01256     }else if( statusbuf[0]!='!')/*Master fails*/
01257         h->pid=-1;
01258 #endif
01259
01260     if(h->pid<0)goto createExternalChannelFails;
01261 #ifdef WITHMPI
01262     if ( PF.me == MASTER ){
01263 #endif
01264         h->gpid=gpid;
01265         /*Open stdout of a newly created program as FILE* :*/
01266         if( (h->frec=fdopen(fdreceive,"r")) == 0 )goto createExternalChannelFails;
01267 #ifdef WITHMPI
01268     }
01269 #endif
01270 #endif
01271     /*Initialize buffers:*/
01272     extHandlerAlloc(h,cmd,shellname,stderrname);
01273     return(h);
01274     /*Something is wrong?*/
01275     createExternalChannelFails:

```

```

01276
01277     destroyExternalChannel(h);
01278     return(NULL);
01279 }/*createExternalChannel*/
01280
01281 /*
01282  #] createExternalChannel :
01283  #[ openExternalChannel :
01284  */
01285 int openExternalChannel(UBYTE *cmd, int daemonize, UBYTE *shellname, UBYTE *stderrname)
01286 {
01287     EXTHANDLE *h=externalChannelsListTop;
01288     int i=0;
01289
01290     for (externalChannelsListTop=0;i<externalChannelsListFill;i++)
01291         if (externalChannelsList[i].cmd==0){
01292             externalChannelsListTop=externalChannelsList+i;
01293             break;
01294         }/*if (externalChannelsList[i].cmd!=0)*/
01295
01296     if (externalChannelsListTop==0){
01297         /*No free cells, create the new one:*/
01298         if (externalChannelsListFill == externalChannelsListStop){
01299             /*The list is full, increase and reallocate it:*/
01300             EXTHANDLE *newbuf=Malloc1(
01301                 (externalChannelsListStop+DELTA_EXT_LIST)*sizeof(EXTHANDLE),
01302                 "External channel list");
01303             for (i=0;i<externalChannelsListFill;i++)
01304                 extHandlerSwallowCopy(newbuf+i,externalChannelsList+i);
01305             if (externalChannelsList!=0)
01306                 M_free (externalChannelsList,"External channel list");
01307             for (;i<externalChannelsListStop;i++)
01308                 extHandlerInit (newbuf+i);
01309             externalChannelsList=newbuf;
01310         }/*if (externalChannelsListFill == externalChannelsListStop)*/
01311         externalChannelsListTop=externalChannelsList+externalChannelsListFill;
01312         externalChannelsListFill++;
01313     }/*if (externalChannelsListTop==0)*/
01314
01315     if (createExternalChannel(
01316         externalChannelsListTop,
01317         (char*) cmd,
01318         daemonize,
01319         (char*)shellname,
01320         (char*)stderrname
01321     )!=NULL){
01322         writeBufToExtChannel=&writeBufToExtChannelOk;
01323         getcFromExtChannel=&getcFromExtChannelOk;
01324         setTerminatorForExternalChannel=&setTerminatorForExternalChannelOk;
01325         setKillModeForExternalChannel=&setKillModeForExternalChannelOk;
01326         return (externalChannelsListTop-externalChannelsList+1);
01327     }
01328     /*else - failure!*/
01329     externalChannelsListTop=h;
01330     return (-1);
01331 }/*openExternalChannel*/
01332
01333 #] openExternalChannel :
01334 #[ initPresetExternalChannels :
01335 */
01336 /*Just simple wrapper to invoke openExternalChannel()
01337 from initPresetExternalChannels():*/
01338 static FORM_INLINE int openPresetExternalChannel(int fdin, int fdout, pid_t theppid)
01339 {
01340     ECINFOSTRUCT inf;
01341     inf.fdin=fdin; inf.fdout=fdout; inf.theppid=theppid;
01342     return( openExternalChannel(NULL,0,(UBYTE *)&inf,NULL) );
01343 }/*openPresetExternalChannel*/
01344
01345 #define PIDTXTSIZE 23
01346 #define BOTHPIDSIZE 45
01347
01348 #ifndef LONG_MAX
01349 #define LONG_MAX 0x7FFFFFFFL
01350 #endif
01351
01352 /*There is a possibility to start FORM from another program providing
01353 one (or more) communication channels. These channels will be
01354 visible from a FORM program as ``pre-opened'' external channels existing
01355 after FORM starts.
01356 Before starting FORM, the parent application must create one or more
01357 pairs of pipes The read-only descriptor of the first pipe in the pair
01358 and the write-only descriptor of the second pipe must be passed to
01359 FORM as an argument of a command line option -pipe in ASCII decimal
01360 format. The argument of the option is a comma-separated list of pairs
01361 r#w# where r# is a read-only descriptor and w# is a write-only
01362 descriptor. Alternatively, the environment variable FORM_PIPES can be
01363 used.

```

```

01363     The following function expects as the first argument
01364 this comma-separated list of the descriptor pairs and tries to
01365 initialize each of channel during thetimeout milliseconds:*/
01366
01367 int initPresetExternalChannels(UBYTE *theline, int thetimeout)
01368 {
01369     int i, nchannels = 0;
01370     int pidln;          /*The length of FORM PID in pidtxt*/
01371     char pidtxt[PIDTXTSIZE], /*64/Log_2[10] = 19.3, this is enough for any integer*/
01372         chdescriptor[PIDTXTSIZE],
01373         bothpidtxt[BOTHPIDSIZE], /*"#,#\n\0"*/
01374         *c,*b = 0;
01375     int pip[2];
01376     pid_t ppid;
01377     if ( theline == NULL ) return(-1);
01378     /*Put into pidtxt PID\n:*/
01379     c = l2s((LONG)getpid(),pidtxt);
01380     *c++='\n';
01381     *c = '\0';
01382     pidln = c-pidtxt;
01383
01384     do {
01385         pip[0] = (int)str2i((char*)theline,&c,0xFFFF);
01386         if( ( pip[0] < 0 ) || ( *c != ',' ) ) goto presetFails;
01387
01388         theline = (UBYTE*)c + 1;
01389         pip[1] = (int)str2i((char*)theline,&c,0xFFFF);
01390         if ( (pip[1] < 0 ) || ( ( *c != ',' ) && ( *c != '\0' ) ) ) goto presetFails;
01391         theline = (UBYTE *)c + 1;
01392         /*Now we have two descriptors.
01393         According to the protocol, FORM must send to external channel
01394         it's PID with added '\n' and read back two comma-separated
01395         decimals with added '\n'. The first must be repeated FORM PID,
01396         the second must be the parent PID
01397         */
01398         if ( writeSome(pip[1],pidtxt,pidln,thetimeout) != pidln ) goto presetFails;
01399         i = readSome(pip[0],bothpidtxt,BOTHPIDSIZE,thetimeout);
01400         if( ( i < 4 ) /*at least 1,2\n*/
01401             || ( i == BOTHPIDSIZE ) /*No space for trailing '\0'*/
01402             ) goto presetFails;
01403         /*read the FORM PID:*/
01404         ppid = (pid_t)str2i(bothpidtxt,&b,getpid());
01405         if( ( *b != ',' ) || ( ppid != getpid() ) )goto presetFails;
01406         /*read the parent PID:*/
01407         /*The problem is that we do not know the the real type of pid_t.
01408         But long should be enough. On obsolete systems (when LONG_MAX
01409         is not defined) we assume pid_t is 32-bit integer.
01410         This can lead to problem with portability: */
01411         ppid = (pid_t)str2i(b+1,&b, LONG_MAX);
01412         if ( (*b != '\n') || (ppid<2) ) goto presetFails;
01413         i = openPresetExternalChannel(pip[0],pip[1],ppid);
01414         if ( i < 0 ) goto presetFails;
01415         nchannels++;
01416         /*Now use bothpidtxt as a buffer for preprovar, the space is enough:*/
01417         /*"PIPE#" where # is ne order number of the channel:*/
01418         b = l2s(nchannels,addStr(bothpidtxt,"PIPE"));
01419         *b = '_';
01420         b[1] = '\0';
01421         *l2s(i,chdescriptor) = '\0';
01422         PutPreVar((UBYTE*)bothpidtxt, (UBYTE*)chdescriptor,0,0);
01423     } while ( *c != '\0' );
01424     /*Export preprovar "PIPES_":*/
01425     *l2s(nchannels,chdescriptor)='\0';
01426     PutPreVar((UBYTE*)"PIPES_", (UBYTE*)chdescriptor,0,0);
01427
01428     /*success:*/
01429     return (nchannels);
01430
01431 presetFails:
01432     /*Here we assume the descriptors the beginning of the list!*/
01433     for(i=0; i<nchannels; i++)
01434         destroyExternalChannel(externalChannelsList+i);
01435     return(-1);
01436 } /*initPresetExternalChannels*/
01437
01438 #] initPresetExternalChannels :
01439 #[ selectExternalChannel :
01440 */
01441 /*
01442 Accepts the valid external channel descriptor (returned by
01443 openExternalChannel) and returns the descriptor of a previous current
01444 channel (0, if there was no current channel, or -1, if the external
01445 channel descriptor is invalid). If n == 0, the function undefine the
01446 current external channel:
01447 */
01448 int selectExternalChannel(int n)
01449 {

```

```

01450 int ret=0;
01451     if (externalChannelsListTop!=0)
01452         ret=externalChannelsListTop-externalChannelsList+1;
01453
01454     if (--n<0) {
01455         if (n!=-1)
01456             return(-1);
01457         externalChannelsListTop=0;
01458         writeBufToExtChannel=&writeBufToExtChannelFailure;
01459         getCFromExtChannel=&getCFromExtChannelFailure;
01460         setTerminatorForExternalChannel=&setTerminatorForExternalChannelFailure;
01461         setKillModeForExternalChannel=&setKillModeForExternalChannelFailure;
01462         return(ret);
01463     }
01464     if (
01465         (n>=externalChannelsListFill) ||
01466         (externalChannelsList[n].cmd==0)
01467     )
01468         return(-1);
01469
01470     externalChannelsListTop=externalChannelsList+n;
01471     writeBufToExtChannel=&writeBufToExtChannelOk;
01472     getCFromExtChannel=&getCFromExtChannelOk;
01473     setTerminatorForExternalChannel=&setTerminatorForExternalChannelOk;
01474     setKillModeForExternalChannel=&setKillModeForExternalChannelOk;
01475     return(ret);
01476 }/*selectExternalChannel*/
01477 /*
01478     #] selectExternalChannel :
01479     #[ closeExternalChannel :
01480 */
01481
01482 /*
01483 Destroys the opened external channel with the descriptor n. It returns
01484 0 in success, or -1 on failure. If the corresponding external channel
01485 was the current one, the current channel becomes undefined. If n==0,
01486 the function closes the current external channel.
01487 */
01488 int closeExternalChannel(int n)
01489 {
01490     if (n==0)
01491         n=externalChannelsListTop-externalChannelsList;
01492     else
01493         n--;/*Count from 0*/
01494
01495     if (
01496         (n<0) ||
01497         (n>=externalChannelsListFill) ||
01498         (externalChannelsList[n].cmd==0)
01499     )/*No such a channel*/
01500         return(-1);
01501
01502     destroyExternalChannel(externalChannelsList+n);
01503     /*If the current external channel was destroyed, undefine current channel:*/
01504     if (externalChannelsListTop==externalChannelsList+n) {
01505         externalChannelsListTop=NULL;
01506         writeBufToExtChannel=&writeBufToExtChannelFailure;
01507         getCFromExtChannel=&getCFromExtChannelFailure;
01508         setTerminatorForExternalChannel=&setTerminatorForExternalChannelFailure;
01509         setKillModeForExternalChannel=&setKillModeForExternalChannelFailure;
01510     }/*if (externalChannelsListTop==externalChannelsList+n)*/
01511     return(0);
01512 }/*closeExternalChannel*/
01513 /*
01514     #] closeExternalChannel :
01515     #[ closeAllExternalChannels :
01516 */
01517 void closeAllExternalChannels(void)
01518 {
01519     int i;
01520     for (i=0; i<externalChannelsListFill; i++)
01521         destroyExternalChannel(externalChannelsList+i);
01522     externalChannelsListFill=externalChannelsListStop=0;
01523     externalChannelsListTop=NULL;
01524
01525     writeBufToExtChannel=&writeBufToExtChannelFailure;
01526     getCFromExtChannel=&getCFromExtChannelFailure;
01527     setTerminatorForExternalChannel=&setTerminatorForExternalChannelFailure;
01528     setKillModeForExternalChannel=&setKillModeForExternalChannelFailure;
01529
01530     if (externalChannelsList!=NULL) {
01531         M_free(externalChannelsList,"External channel list");
01532         externalChannelsList=NULL;
01533     }
01534 }/*closeAllExternalChannels*/
01535 /*
01536     #] closeAllExternalChannels :

```

```

01537     # [ getExternalChannelPid :
01538     /*
01539     #ifdef SELFTEST
01540     pid_t getExternalChannelPid(void)
01541     {
01542         if (externalChannelsListTop != 0)
01543             return (externalChannelsListTop -> pid);
01544         return (-1);
01545     } /*getExternalChannelPid*/
01546     #endif
01547     /*
01548     # ] getExternalChannelPid :
01549     # [ getCurrentExternalChannel :
01550     /*
01551
01552     int getCurrentExternalChannel(void)
01553     {
01554
01555         if ( externalChannelsListTop != 0 )
01556             return (externalChannelsListTop-externalChannelsList+1);
01557         return (0);
01558     } /*getCurrentExternalChannel*/
01559     /*
01560     # ] getCurrentExternalChannel :
01561     # [ Selftest main :
01562     /*
01563
01564     #ifdef SELFTEST
01565
01566     /*
01567         This is the example of how all these public functions may be used:
01568     */
01569
01570     char buf[1024];
01571     char buf2[1024];
01572
01573     void help(void)
01574     {
01575         printf("String started with a special letter is a command\n");
01576         printf("Known commands are:\n");
01577         printf("H or ? -- this help\n");
01578         printf("Nn<command> -- start a new command\n");
01579         printf("S<command> -- start a new command in a subshell, daemon, stderr>/dev/null\n");
01580         printf("C# -- destroy channel #\n");
01581         printf("R# -- set a new cahhel(number#) as a current one\n");
01582         printf("K#1 #2 -- set signal for kill and kill mode (0 or !=0)\n");
01583         printf(" ^d to quit\n");
01584     } /*help*/
01585
01586     int main (void)
01587     {
01588         int i, j, k, last;
01589         long long sum = 0;
01590
01591         /*openExternalChannel(UBYTE *cmd, int daemonize, UBYTE *shellname, UBYTE *stderrname)*/
01592
01593         help();
01594
01595         printf("Initial channel:%d\n", last=openExternalChannel((UBYTE*)"cat", 0, NULL, NULL));
01596
01597         if ( ( i = setTerminatorForExternalChannel("qu") ) != 0 ) return 1;
01598         printf("Terminator is 'qu'\n");
01599
01600         while ( fgets(buf, 1024, stdin) != NULL ) {
01601             if ( *buf == 'N' ) {
01602                 printf("New channel:%d\n", j=openExternalChannel((UBYTE*)buf+1, 0, NULL, NULL));
01603                 continue;
01604             }
01605             else if ( *buf == 'C' ) {
01606                 int n;
01607                 sscanf(buf+1, "%d", &n);
01608                 printf("Destroy last channel:%d\n", closeExternalChannel(n));
01609                 continue;
01610             }
01611             else if ( *buf == 'R' ) {
01612                 int n = 0;
01613                 sscanf(buf+1, "%d", &n);
01614                 printf("Reopen channel %d:%d\n", n, selectExternalChannel(n));
01615                 continue;
01616             } else if ( *buf == 'K' ) {
01617                 int n=0, g = 0;
01618                 sscanf(buf+1, "%d %d", &n, &g);
01619                 printf("setKillMode %d\n", setKillModeForExternalChannel(n, g));
01620                 continue;
01621             } else if ( *buf == 'S' ) {
01622                 printf("New channel with sh&d&stderr:%d\n",
01623                     j=openExternalChannel((UBYTE*)buf+1, 1, (UBYTE*)" /bin/sh -c", (UBYTE*)" /dev/null"));

```

```


01624         continue;
01625     }
01626     else if( ( *buf == 'H' ) || ( *buf == '?' ) ){
01627         help();
01628         continue;
01629     }
01630
01631     writeBufToExtChannel(buf,k=StrLen(buf));
01632     sum += k;
01633     for ( j = 0; ( i = getcFromExtChannel() ) != '\n'; j++) {
01634         if ( i == EOF ) {
01635             printf("EOF!\n");
01636             break;
01637         }
01638         buf2[j] = i;
01639     }
01640     buf2[j] = '\0';
01641     printf("I got: '%s'; pid=%d\n",buf2,getExternalChannelPid());
01642 }
01643 printf("Total:%lld bytes\n",sum);
01644 closeAllExternalChannels();
01645 return 0;
01646 }
01647 #endif /*ifdef SELFTEST*/
01648 /*
01649     #] Selftest main :
01650 */
01651
01652 #endif /*ifndef WITHEXTERNALCHANNEL ... else*/

```

4.35 factor.c File Reference

#include "form3.h"

Include dependency graph for factor.c:

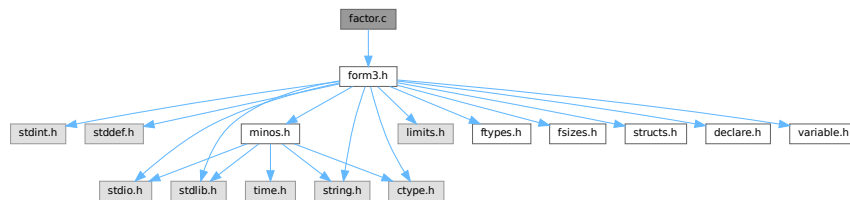

Functions

- int [FactorIn](#) (PHEAD WORD *term, WORD level)
- int [FactorInExpr](#) (PHEAD WORD *term, WORD level)

4.35.1 Detailed Description

The routines for finding (one term) factors in dollars and expressions.

Definition in file [factor.c](#).

4.35.2 Function Documentation

4.35.2.1 FactorIn()

```
int FactorIn (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 46 of file [factor.c](#).

4.35.2.2 FactorInExpr()

```
int FactorInExpr (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 421 of file [factor.c](#).

4.36 factor.c

[Go to the documentation of this file.](#)

```
00001
00005 /* #[] License : */
00006 /*
00007  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008  * When using this file you are requested to refer to the publication
00009  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010  * This is considered a matter of courtesy as the development was paid
00011  * for by FOM the Dutch physics granting agency and we would like to
00012  * be able to track its scientific use to convince FOM of its value
00013  * for the community.
00014  *
00015  * This file is part of FORM.
00016  *
00017  * FORM is free software: you can redistribute it and/or modify it under the
00018  * terms of the GNU General Public License as published by the Free Software
00019  * Foundation, either version 3 of the License, or (at your option) any later
00020  * version.
00021  *
00022  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025  * details.
00026  *
00027  * You should have received a copy of the GNU General Public License along
00028  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029  */
00030 /* #[] License : */
00031 /*
00032  * #[] Includes : factor.c
00033  */
00034 #include "form3.h"
00035
00036
00037 /*
00038  * #[] Includes :
00039  * #[] FactorIn :
00040
00041  * This routine tests for a factor in a dollar expression.
00042
00043  * Note that unlike with regular active or hidden expressions we cannot
00044  * add memory as easily as dollars are rather volatile.
00045  */
00046 int FactorIn(PHEAD WORD *term, WORD level)
00047 {
00048     GETBIDENTITY
00049     WORD *t, *tstop, *m, *mm, *oldwork, *mstop, *n1, *n2, *n3, *n4, *n1stop, *n2stop;
00050     WORD *r1, *r2, *r3, *r4, j, k, kGCD, kGCD2, kLCM, jGCD, kkLCM, jLCM, size;
00051     UWORD *GCDBuffer, *GCDBuffer2, *LCMBuffer, *LCMb, *LCMc;
```

```

00052     int fromwhere = 0, i;
00053     DOLLARS d;
00054     t = term; GETSTOP(t,tstop); t++;
00055     while ( ( t < tstop ) && ( *t != FACTORIN || ( ( *t == FACTORIN )
00056         && ( t[FUNHEAD] != -DOLLAREXPRESSION || t[1] != FUNHEAD+2 ) ) ) ) t += t[1];
00057     if ( t >= tstop ) {
00058         MLOCK(ErrorMessageLock);
00059         MesPrint("Internal error. Could not find proper factorin_ function.");
00060         MUNLOCK(ErrorMessageLock);
00061         return(-1);
00062     }
00063     oldwork = AT.WorkPointer;
00064     d = Dollars + t[FUNHEAD+1];
00065     #ifdef WITHPTHREADS
00066     {
00067         int nummodopt, dtype = -1;
00068         if ( AS.MultiThreaded ) {
00069             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00070                 if ( t[FUNHEAD+1] == ModOptdollars[nummodopt].number ) break;
00071             }
00072             if ( nummodopt < NumModOptdollars ) {
00073                 dtype = ModOptdollars[nummodopt].type;
00074                 if ( dtype == MODLOCAL ) {
00075                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
00076                 }
00077             }
00078         }
00079     }
00080     #endif
00081     if ( d->type == DOLTERMS ) {
00082         fromwhere = 1;
00083     }
00084     else if ( ( d = DolToTerms(BHEAD t[FUNHEAD+1]) ) == 0 ) {
00085         /*
00086          * The variable cannot convert to an expression
00087          * We replace the function by 1.
00088          */
00089         m = oldwork; n1 = term;
00090         while ( n1 < t ) *m++ = *n1++;
00091         n1 = t + t[1]; tstop = term + *term;
00092         while ( n1 < tstop ) *m++ = *n1++;
00093         *oldwork = m - oldwork;
00094         AT.WorkPointer = m;
00095         if ( Generator(BHEAD oldwork,level) ) return(-1);
00096         AT.WorkPointer = oldwork;
00097         return(0);
00098     }
00099     if ( d->where[0] == 0 ) {
00100         if ( fromwhere == 0 ) {
00101             if ( d->factors ) M_free(d->factors,"Dollar factors");
00102             M_free(d,"Dollar in FactorIn_");
00103         }
00104         return(0);
00105     }
00106     /*
00107     Now we have an expression in d->where. Find the symbolic factor that
00108     divides the expression and the numerical factor that makes all
00109     coefficients integer.
00110     For the symbolic factor we make a copy of the first term, and then
00111     go through all terms, scratching in the copy the objects that do not
00112     occur in the terms.
00113     */
00114     m = oldwork;
00115     mm = d->where;
00116     k = *mm - ABS((mm[*mm-1]));
00117     for ( j = 0; j < k; j++ ) *m++ = *mm++;
00118     mstop = m;
00119     *oldwork = k;
00120     /*
00121     The copy is in place. Now search through the terms. Start at the second term
00122     */
00123     mm = d->where + d->where[0];
00124     while ( *mm ) {
00125         m = oldwork+1;
00126         r2 = mm+*mm;
00127         r2 -= ABS(r2[-1]);
00128         r1 = mm+1;
00129         while ( m < mstop ) {
00130             while ( r1 < r2 ) {
00131                 if ( *r1 != *m ) {
00132                     r1 += r1[1]; continue;
00133                 }
00134             }
00135             /*
00136             Now the various cases
00137             */
00138             #[ SYMBOL :

```



```

00139 */
00140         if ( *m == SYMBOL ) {
00141             n1 = m+2; n1stop = m+m[1];
00142             n2stop = r1+r1[1];
00143             while ( n1 < n1stop ) {
00144                 n2 = r1+2;
00145                 while ( n2 < n2stop ) {
00146                     if ( *n1 != *n2 ) { n2 += 2; continue; }
00147                     if ( n1[1] > 0 ) {
00148                         if ( n2[1] < 0 ) { n2 += 2; continue; }
00149                         if ( n2[1] < n1[1] ) n1[1] = n2[1];
00150                     }
00151                     else {
00152                         if ( n2[1] > 0 ) { n2 += 2; continue; }
00153                         if ( n2[1] > n1[1] ) n1[1] = n2[1];
00154                     }
00155                     break;
00156                 }
00157                 if ( n2 >= n2stop ) { /* scratch symbol */
00158                     if ( m[1] == 4 ) goto scratch;
00159                     m[1] -= 2;
00160                     n3 = n1; n4 = n1+2;
00161                     while ( n4 < mstop ) *n3++ = *n4++;
00162                     *oldwork = n3 - oldwork;
00163                     mstop -= 2; n1stop -= 2;
00164                     continue;
00165                 }
00166                 n1 += 2;
00167             }
00168             break;
00169         }
00170 /*
00171 #] SYMBOL :
00172 #[ DOTPRODUCT :
00173 */
00174         else if ( *m == DOTPRODUCT ) {
00175             n1 = m+2; n1stop = m+m[1];
00176             n2stop = r1+r1[1];
00177             while ( n1 < n1stop ) {
00178                 n2 = r1+2;
00179                 while ( n2 < n2stop ) {
00180                     if ( *n1 != *n2 || n1[1] != n2[1] ) { n2 += 3; continue; }
00181                     if ( n1[2] > 0 ) {
00182                         if ( n2[2] < 0 ) { n2 += 3; continue; }
00183                         if ( n2[2] < n1[2] ) n1[2] = n2[2];
00184                     }
00185                     else {
00186                         if ( n2[2] > 0 ) { n2 += 3; continue; }
00187                         if ( n2[2] > n1[2] ) n1[2] = n2[2];
00188                     }
00189                     break;
00190                 }
00191                 if ( n2 >= n2stop ) { /* scratch symbol */
00192                     if ( m[1] == 5 ) goto scratch;
00193                     m[1] -= 3;
00194                     n3 = n1; n4 = n1+3;
00195                     while ( n4 < mstop ) *n3++ = *n4++;
00196                     *oldwork = n3 - oldwork;
00197                     mstop -= 3; n1stop -= 3;
00198                     continue;
00199                 }
00200                 n1 += 3;
00201             }
00202             break;
00203         }
00204 /*
00205 #] DOTPRODUCT :
00206 #[ VECTOR :
00207 */
00208         else if ( *m == VECTOR ) {
00209             /*
00210              Here we have to be careful if there is more than
00211              one of the same
00212              */
00213             n1 = m+2; n1stop = m+m[1];
00214             n2 = r1+2; n2stop = r1+r1[1];
00215             while ( n1 < n1stop ) {
00216                 while ( n2 < n2stop ) {
00217                     if ( *n1 == *n2 && n1[1] == n2[1] ) {
00218                         n2 += 2; goto nextn1;
00219                     }
00220                     n2 += 2;
00221                 }
00222                 if ( n2 >= n2stop ) { /* scratch symbol */
00223                     if ( m[1] == 4 ) goto scratch;
00224                     m[1] -= 2;
00225                     n3 = n1; n4 = n1+2;

```

```

00226             while ( n4 < mstop ) *n3++ = *n4++;
00227             *oldwork = n3 - oldwork;
00228             mstop -= 2; nlstop -= 2;
00229             continue;
00230         }
00231         n2 = r1+2;
00232 nextn1:       n1 += 2;
00233         }
00234         break;
00235     }
00236 /*
00237     #] VECTOR :
00238     #[ REMAINDER :
00239 */
00240     else {
00241 /*
00242         Again: watch for multiple occurrences of the same object
00243 */
00244         if ( m[1] != r1[1] ) { r1 += r1[1]; continue; }
00245         for ( j = 2; j < m[1]; j++ ) {
00246             if ( m[j] != r1[j] ) break;
00247         }
00248         if ( j < m[1] ) { r1 += r1[1]; continue; }
00249         r1 += r1[1]; /* to restart at the next potential match */
00250         goto nextm; /* match */
00251     }
00252 /*
00253     #] REMAINDER :
00254 */
00255     }
00256     if ( r1 >= r2 ) { /* no factor! */
00257 scratch:;
00258         r3 = m + m[1]; r4 = m;
00259         while ( r3 < mstop ) *r4++ = *r3++;
00260         *oldwork = r4 - oldwork;
00261         if ( *oldwork == 1 ) goto nofactor;
00262         mstop = r4;
00263         r1 = mm + 1;
00264         continue;
00265     }
00266     r1 = mm + 1;
00267 nextm:     m += m[1];
00268     }
00269     mm = mm + *mm;
00270 }
00271
00272 nofactor:;
00273 /*
00274     For the coefficient we have to determine the LCM of the denominators
00275     and the GCD of the numerators.
00276 */
00277     GCDBuffer = NumberMalloc("FactorIn"); GCDBuffer2 = NumberMalloc("FactorIn");
00278     LCMbuffer = NumberMalloc("FactorIn"); LCMb = NumberMalloc("FactorIn"); LCMc =
    NumberMalloc("FactorIn");
00279     r1 = d->where;
00280 /*
00281     First take the first term to load up the LCM and the GCD
00282 */
00283     r2 = r1 + *r1;
00284     j = r2[-1];
00285     r3 = r2 - ABS(j);
00286     k = REDLENG(j);
00287     if ( k < 0 ) k = -k;
00288     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00289     for ( kGCD = 0; kGCD < k; kGCD++ ) GCDBuffer[kGCD] = r3[kGCD];
00290     k = REDLENG(j);
00291     if ( k < 0 ) k = -k;
00292     r3 += k;
00293     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00294     for ( kLCM = 0; kLCM < k; kLCM++ ) LCMbuffer[kLCM] = r3[kLCM];
00295     r1 = r2;
00296 /*
00297     Now go through the rest of the terms in this dollar buffer.
00298 */
00299     while ( *r1 ) {
00300         r2 = r1 + *r1;
00301         j = r2[-1];
00302         r3 = r2 - ABS(j);
00303         k = REDLENG(j);
00304         if ( k < 0 ) k = -k;
00305         while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00306         if ( ( ( GCDBuffer[0] == 1 ) && ( kGCD == 1 ) ) ) {
00307 /*
00308             GCD is already 1
00309 */
00310         }
00311         else if ( ( ( k != 1 ) || ( r3[0] != 1 ) ) ) {

```

```

00312         if ( GcdLong(BHEAD GCDbuffer,kGCD, (UWORD *)r3,k,GCDbuffer2,&kGCD2) ) {
00313             goto onerror;
00314         }
00315         kGCD = kGCD2;
00316         for ( i = 0; i < kGCD; i++ ) GCDbuffer[i] = GCDbuffer2[i];
00317     }
00318     else {
00319         kGCD = 1; GCDbuffer[0] = 1;
00320     }
00321     k = REDLENG(j);
00322     if ( k < 0 ) k = -k;
00323     r3 += k;
00324     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00325     if ( ( LCMbuffer[0] == 1 ) && ( kLCM == 1 ) ) {
00326         for ( kLCM = 0; kLCM < k; kLCM++ )
00327             LCMbuffer[kLCM] = r3[kLCM];
00328     }
00329     else if ( ( k != 1 ) || ( r3[0] != 1 ) ) {
00330         if ( GcdLong(BHEAD LCMbuffer,kLCM, (UWORD *)r3,k,LCMb,&kLCM) ) {
00331             goto onerror;
00332         }
00333         DivLong((UWORD *)r3,k,LCMb,kLCM,LCMb,&kLCM,LCMc,&jLCM);
00334         Mullong(LCMbuffer,kLCM,LCMb,kLCM,LCMc,&jLCM);
00335         for ( kLCM = 0; kLCM < jLCM; kLCM++ )
00336             LCMbuffer[kLCM] = LCMc[kLCM];
00337     }
00338     else {} /* LCM doesn't change */
00339     r1 = r2;
00340 }
00341 /*
00342 Now put the factor together: GCD/LCM
00343 */
00344 r3 = (WORD *) (GCDbuffer);
00345 if ( kGCD == kLCM ) {
00346     for ( jGCD = 0; jGCD < kGCD; jGCD++ )
00347         r3[jGCD+kGCD] = LCMbuffer[jGCD];
00348     k = kGCD;
00349 }
00350 else if ( kGCD > kLCM ) {
00351     for ( jGCD = 0; jGCD < kLCM; jGCD++ )
00352         r3[jGCD+kGCD] = LCMbuffer[jGCD];
00353     for ( jGCD = kLCM; jGCD < kGCD; jGCD++ )
00354         r3[jGCD+kGCD] = 0;
00355     k = kGCD;
00356 }
00357 else {
00358     for ( jGCD = kGCD; jGCD < kLCM; jGCD++ )
00359         r3[jGCD] = 0;
00360     for ( jGCD = 0; jGCD < kLCM; jGCD++ )
00361         r3[jGCD+kLCM] = LCMbuffer[jGCD];
00362     k = kLCM;
00363 }
00364 j = 2*k+1;
00365 mm = m = oldwork + oldwork[0];
00366 /*
00367 Now compose the new term
00368 */
00369 n1 = term;
00370 while ( n1 < t ) *m++ = *n1++;
00371 n1 += n1[1];
00372 n2 = oldwork+1;
00373 while ( n2 < mm ) *m++ = *n2++;
00374 while ( n1 < tstop ) *m++ = *n1++;
00375 /*
00376 And the coefficient
00377 */
00378 size = term[*term-1];
00379 size = REDLENG(size);
00380 if ( MulRat(BHEAD (UWORD *)tstop,size, (UWORD *)r3,k,
00381             (UWORD *)m,&size) ) goto onerror;
00382 size = INCLENG(size);
00383 k = size < 0 ? -size: size;
00384 m[k-1] = size;
00385 m += k;
00386 *mm = (WORD) (m - mm);
00387 AT.WorkPointer = m;
00388 if ( Generator(BHEAD mm,level) ) goto onerror;
00389 AT.WorkPointer = oldwork;
00390 if ( fromwhere == 0 ) {
00391     if ( d->factors ) M_free(d->factors,"Dollar factors");
00392     M_free(d,"Dollar in FactorIn");
00393 }
00394 NumberFree(GCDbuffer,"FactorIn"); NumberFree(GCDbuffer2,"FactorIn");
00395 NumberFree(LCMbuffer,"FactorIn"); NumberFree(LCMb,"FactorIn"); NumberFree(LCMc,"FactorIn");
00396 return(0);
00397 onerror:
00398     AT.WorkPointer = oldwork;

```

```

00399     MLOCK(ErrorMessageLock);
00400     MesCall("FactorIn");
00401     MUNLOCK(ErrorMessageLock);
00402     NumberFree(GCDBuffer,"FactorIn"); NumberFree(GCDBuffer2,"FactorIn");
00403     NumberFree(LCMbuffer,"FactorIn"); NumberFree(LCMB,"FactorIn"); NumberFree(LCMc,"FactorIn");
00404     return(-1);
00405 }
00406
00407 /*
00408  #] FactorIn :
00409  #[ FactorInExpr :
00410
00411     This routine tests for a factor in an active or hidden expression.
00412
00413     The factor from the last call is stored in a cache.
00414     Main problem here is whether the cache is global or private to each thread.
00415     A global cache gives most likely the same traffic jam for the computation
00416     as a local cache. The local cache may stay valid longer.
00417     In the future we may make it such that threads can look at the cache
00418     of the others, or even whether a certain factor is under construction.
00419 */
00420
00421 int FactorInExpr(PHEAD WORD *term, WORD level)
00422 {
00423     GETBIDENTITY
00424     WORD *t, *tstop, *m, *oldwork, *mstop, *n1, *n2, *n3, *n4, *n1stop, *n2stop;
00425     WORD *r1, *r2, *r3, *r4, j, k, kGCD, kGCD2, kLCM, jGCD, kkLCM, jLCM, size, sign;
00426     WORD *newterm, expr = 0;
00427     WORD olddeferflag = AR.DeferFlag, oldgetfile = AR.GetFile, oldhold = AR.KeptInHold;
00428     WORD newgetfile, newhold;
00429     int i;
00430     EXPRESSIONS e;
00431     FILEHANDLE *file = 0;
00432     POSITION position, oldposition, startposition;
00433     WORD *oldcpointer = AR.CompressPointer;
00434     UWORD *GCDBuffer, *GCDBuffer2, *LCMBuffer, *LCMB, *LCMc;
00435     GCDBuffer = NumberMalloc("FactorInExpr"); GCDBuffer2 = NumberMalloc("FactorInExpr");
00436     LCMbuffer = NumberMalloc("FactorInExpr"); LCMB = NumberMalloc("FactorInExpr"); LCMc =
00437     NumberMalloc("FactorInExpr");
00438     t = term; GETSTOP(t,tstop); t++;
00439     while ( t < tstop ) {
00440         if ( *t == FACTORIN && t[1] == FUNHEAD+2 && t[FUNHEAD] == -EXPRESSION ) {
00441             expr = t[FUNHEAD+1];
00442             break;
00443         }
00444         t += t[1];
00445     }
00446     if ( t >= tstop ) {
00447         MLOCK(ErrorMessageLock);
00448         MesPrint("Internal error. Could not find proper factorin_ function.");
00449         MUNLOCK(ErrorMessageLock);
00450         NumberFree(GCDBuffer,"FactorInExpr"); NumberFree(GCDBuffer2,"FactorInExpr");
00451         NumberFree(LCMbuffer,"FactorInExpr"); NumberFree(LCMB,"FactorInExpr");
00452         NumberFree(LCMc,"FactorInExpr");
00453         return(-1);
00454     }
00455     oldwork = AT.WorkPointer;
00456     if ( AT.previousEfactor && ( expr == AT.previousEfactor[0] ) ) {
00457         /*
00458            We have a hit in the cache. Construct the new term.
00459            At the moment AT.previousEfactor[1] is reserved for future flags
00460         */
00461         goto PutTheFactor;
00462     }
00463     /*
00464        No hit. We have to do the work. We start with constructing the factor
00465        in the WorkSpace. Later we will move it to the cache.
00466        Finally we will jump to PutTheFactor.
00467     */
00468     e = Expressions + expr;
00469     switch ( e->status ) {
00470         case LOCALEXPRESSION:
00471         case SKIPLEXPRESSION:
00472         case DROPLEXPRESSION:
00473         case GLOBALEXPRESSION:
00474         case SKIPGEXPRESSION:
00475         case DROPGEXPRESSION:
00476         /*
00477            Expression is to be found in the input Scratch file.
00478            Set the file handle and the position.
00479            The rest is done by GetTerm.
00480         */
00481         newhold = 0;
00482         newgetfile = 1;
00483         file = AR.infile;
00484         break;
00485         case HIDDENLEXPRESSION:

```

```

00484         case HIDDENEXPRESSION:
00485         case HIDELEXPRESSION:
00486         case HIDEGEXPRESSION:
00487         case DROPHLEXPRESSION:
00488         case DROPHGEXPRESSION:
00489         case UNHIDELEXPRESSION:
00490         case UNHIDEGEXPRESSION:
00491     /*
00492         Expression is to be found in the hide Scratch file.
00493         Set the file handle and the position.
00494         The rest is done by GetTerm.
00495     */
00496         newhold = 0;
00497         newgetfile = 2;
00498         file = AR.hidefile;
00499         break;
00500     case STOREDEXPRESSION:
00501     /*
00502         This is an 'illegal' case
00503     */
00504         MLOCK(ErrorMessageLock);
00505         MesPrint("Error: factorin_ cannot determine factors in stored expressions.");
00506         MUNLOCK(ErrorMessageLock);
00507         NumberFree(GCDBuffer, "FactorInExpr"); NumberFree(GCDBuffer2, "FactorInExpr");
00508         NumberFree(LCMBuffer, "FactorInExpr"); NumberFree(LCMB, "FactorInExpr");
00509         NumberFree(LCMc, "FactorInExpr");
00510         return(-1);
00511     case DROPEDEXPRESSION:
00512     /*
00513         We replace the function by 1.
00514     */
00515         m = oldwork; n1 = term;
00516         while ( n1 < t ) *m++ = *n1++;
00517         n1 = t + t[1]; tstop = term + *term;
00518         while ( n1 < tstop ) *m++ = *n1++;
00519         *oldwork = m - oldwork;
00520         AT.WorkPointer = m;
00521         if ( Generator(BHEAD oldwork, level) ) {
00522             NumberFree(GCDBuffer, "FactorInExpr"); NumberFree(GCDBuffer2, "FactorInExpr");
00523             NumberFree(LCMBuffer, "FactorInExpr"); NumberFree(LCMB, "FactorInExpr");
00524             NumberFree(LCMc, "FactorInExpr");
00525             return(-1);
00526         }
00527         AT.WorkPointer = oldwork;
00528         NumberFree(GCDBuffer, "FactorInExpr"); NumberFree(GCDBuffer2, "FactorInExpr");
00529         NumberFree(LCMBuffer, "FactorInExpr"); NumberFree(LCMB, "FactorInExpr");
00530         NumberFree(LCMc, "FactorInExpr");
00531         return(0);
00532     default:
00533         MLOCK(ErrorMessageLock);
00534         MesPrint("Error: Illegal expression in factorinexpr.");
00535         MUNLOCK(ErrorMessageLock);
00536         NumberFree(GCDBuffer, "FactorInExpr"); NumberFree(GCDBuffer2, "FactorInExpr");
00537         NumberFree(LCMBuffer, "FactorInExpr"); NumberFree(LCMB, "FactorInExpr");
00538         NumberFree(LCMc, "FactorInExpr");
00539         return(-1);
00540     }
00541     /*
00542     Before we start with the file we set the buffers for the coefficient
00543     For the coefficient we have to determine the LCM of the denominators
00544     and the GCD of the numerators.
00545     */
00546     position = AS.OldOnFile[expr];
00547     AR.DeferFlag = 0; AR.KeptInHold = newhold; AR.GetFile = newgetfile;
00548     SeekScratch(file, &oldposition);
00549     SetScratch(file, &position);
00550     if ( GetTerm(BHEAD oldwork) <= 0 ) {
00551         MLOCK(ErrorMessageLock);
00552         MesPrint("(5) Expression %d has problems in scratchfile", expr);
00553         MUNLOCK(ErrorMessageLock);
00554         NumberFree(GCDBuffer, "FactorInExpr"); NumberFree(GCDBuffer2, "FactorInExpr");
00555         NumberFree(LCMBuffer, "FactorInExpr"); NumberFree(LCMB, "FactorInExpr");
00556         NumberFree(LCMc, "FactorInExpr");
00557         return(-1);
00558     }
00559     SeekScratch(file, &startposition);
00560     SeekScratch(file, &position);
00561     /*
00562     Load the first term in the workspace
00563     */
00564     if ( GetTerm(BHEAD oldwork) == 0 ) {
00565         SetScratch(file, &oldposition); /* We still need this until Processor is clean */
00566         AR.DeferFlag = olddeferflag;
00567         oldwork[0] = 4; oldwork[1] = 1; oldwork[2] = 1; oldwork[3] = 3;
00568         goto Complete;
00569     }
00570     SeekScratch(file, &position);

```

```

00566     AR.DeferFlag = olddeferflag; AR.KeptInHold = oldhold; AR.GetFile = oldgetfile;
00567
00568     r2 = m = oldwork + *oldwork;
00569     j = m[-1];
00570     m -= ABS(j);
00571     *oldwork = (WORD)(m-oldwork);
00572     AT.WorkPointer = newterm = mstop = m;
00573 /*
00574     Now take the coefficient of the first term to load up the LCM and the GCD
00575 */
00576     r3 = m;
00577     k = REDLENG(j);
00578     if ( k < 0 ) { k = -k; sign = -1; }
00579     else { sign = 1; }
00580     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00581     for ( kGCD = 0; kGCD < k; kGCD++ ) GCDbuffer[kGCD] = r3[kGCD];
00582     k = REDLENG(j);
00583     if ( k < 0 ) k = -k;
00584     r3 += k;
00585     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00586     for ( kLCM = 0; kLCM < k; kLCM++ ) LCMbuffer[kLCM] = r3[kLCM];
00587 /*
00588     The copy and the coefficient are in place. Now search through the terms.
00589 */
00590     for (;;) {
00591         AR.DeferFlag = 0; AR.KeptInHold = newhold; AR.GetFile = newgetfile;
00592         SetScratch(file,&position);
00593         size = GetTerm(BHEAD newterm);
00594         SeekScratch(file,&position);
00595         AR.DeferFlag = olddeferflag; AR.KeptInHold = oldhold; AR.GetFile = oldgetfile;
00596         if ( size == 0 ) break;
00597         m = oldwork+1;
00598         r2 = newterm + *newterm;
00599         r2 -= ABS(r2[-1]);
00600         r1 = newterm+1;
00601         while ( m < mstop ) {
00602             while ( r1 < r2 ) {
00603                 if ( *r1 != *m ) {
00604                     r1 += r1[1]; continue;
00605                 }
00606             /*
00607                 Now the various cases
00608             */
00609             /*
00610                 if ( *m == SYMBOL ) {
00611                     n1 = m+2; n1stop = m+m[1];
00612                     n2stop = r1+r1[1];
00613                     while ( n1 < n1stop ) {
00614                         n2 = r1+2;
00615                         while ( n2 < n2stop ) {
00616                             if ( *n1 != *n2 ) { n2 += 2; continue; }
00617                             if ( n1[1] > 0 ) {
00618                                 if ( n2[1] < 0 ) { n2 += 2; continue; }
00619                                 if ( n2[1] < n1[1] ) n1[1] = n2[1];
00620                             }
00621                             else {
00622                                 if ( n2[1] > 0 ) { n2 += 2; continue; }
00623                                 if ( n2[1] > n1[1] ) n1[1] = n2[1];
00624                             }
00625                             break;
00626                         }
00627                         if ( n2 >= n2stop ) { /* scratch symbol */
00628                             if ( m[1] == 4 ) goto scratch;
00629                             m[1] -= 2;
00630                             n3 = n1; n4 = n1+2;
00631                             while ( n4 < mstop ) *n3++ = *n4++;
00632                             *oldwork = n3 - oldwork;
00633                             mstop -= 2; n1stop -= 2;
00634                             continue;
00635                         }
00636                         n1 += 2;
00637                     }
00638                     break;
00639                 }
00640             /*
00641                 #] SYMBOL :
00642                 #[ DOTPRODUCT :
00643             */
00644                 else if ( *m == DOTPRODUCT ) {
00645                     n1 = m+2; n1stop = m+m[1];
00646                     n2stop = r1+r1[1];
00647                     while ( n1 < n1stop ) {
00648                         n2 = r1+2;
00649                         while ( n2 < n2stop ) {
00650                             if ( *n1 != *n2 || n1[1] != n2[1] ) { n2 += 3; continue; }
00651                             if ( n1[2] > 0 ) {
00652                                 if ( n2[2] < 0 ) { n2 += 3; continue; }

```

```

00653             if ( n2[2] < n1[2] ) n1[2] = n2[2];
00654         }
00655         else {
00656             if ( n2[2] > 0 ) { n2 += 3; continue; }
00657             if ( n2[2] > n1[2] ) n1[2] = n2[2];
00658         }
00659         break;
00660     }
00661     if ( n2 >= n2stop ) { /* scratch dotproduct */
00662         if ( m[1] == 5 ) goto scratch;
00663         m[1] -= 3;
00664         n3 = n1; n4 = n1+3;
00665         while ( n4 < mstop ) *n3++ = *n4++;
00666         *oldwork = n3 - oldwork;
00667         mstop -= 3; nlstop -= 3;
00668         continue;
00669     }
00670     n1 += 3;
00671 }
00672 break;
00673 }
00674 /*
00675 #] DOTPRODUCT :
00676 #[ VECTOR :
00677 */
00678     else if ( *m == VECTOR ) {
00679 /*
00680         Here we have to be careful if there is more than
00681         one of the same
00682 */
00683         n1 = m+2; nlstop = m+m[1];
00684         n2 = r1+2; n2stop = r1+r1[1];
00685         while ( n1 < nlstop ) {
00686             while ( n2 < n2stop ) {
00687                 if ( *n1 == *n2 && n1[1] == n2[1] ) {
00688                     n2 += 2; goto nextn1;
00689                 }
00690                 n2 += 2;
00691             }
00692             if ( n2 >= n2stop ) { /* scratch vector */
00693                 if ( m[1] == 4 ) goto scratch;
00694                 m[1] -= 2;
00695                 n3 = n1; n4 = n1+2;
00696                 while ( n4 < mstop ) *n3++ = *n4++;
00697                 *oldwork = n3 - oldwork;
00698                 mstop -= 2; nlstop -= 2;
00699                 continue;
00700             }
00701             n2 = r1+2;
00702             n1 += 2;
00703         }
00704         break;
00705     }
00706 /*
00707 #] VECTOR :
00708 #[ REMAINDER :
00709 */
00710     else {
00711 /*
00712         Again: watch for multiple occurrences of the same object
00713 */
00714         if ( m[1] != r1[1] ) { r1 += r1[1]; continue; }
00715         for ( j = 2; j < m[1]; j++ ) {
00716             if ( m[j] != r1[j] ) break;
00717         }
00718         if ( j < m[1] ) { r1 += r1[1]; continue; }
00719         r1 += r1[1]; /* to restart at the next potential match */
00720         goto nextm; /* match */
00721     }
00722 /*
00723 #] REMAINDER :
00724 */
00725 }
00726 if ( r1 >= r2 ) { /* no factor! */
00727 scratch:;
00728     r3 = m + m[1]; r4 = m;
00729     while ( r3 < mstop ) *r4++ = *r3++;
00730     *oldwork = r4 - oldwork;
00731     if ( *oldwork == 1 ) goto nofactor;
00732     mstop = r4;
00733     r1 = newterm + 1;
00734     continue;
00735 }
00736 r1 = newterm + 1;
00737 nextm: m += m[1];
00738 }
00739 nofactor:;

```

```

00740 /*
00741     Now the coefficient
00742 */
00743     r2 = newterm + *newterm;
00744     j = r2[-1];
00745     r3 = r2 - ABS(j);
00746     k = REDLENG(j);
00747     if ( k < 0 ) k = -k;
00748     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00749     if ( ( ( GCDbuffer[0] == 1 ) && ( kGCD == 1 ) ) ) {
00750 /*
00751         GCD is already 1
00752 */
00753     }
00754     else if ( ( ( k != 1 ) || ( r3[0] != 1 ) ) ) {
00755         if ( GcdLong(BHEAD GCDbuffer,kGCD, (UWORD *)r3,k,GCDbuffer2,&kGCD2) ) {
00756             goto onerror;
00757         }
00758         kGCD = kGCD2;
00759         for ( i = 0; i < kGCD; i++ ) GCDbuffer[i] = GCDbuffer2[i];
00760     }
00761     else {
00762         kGCD = 1; GCDbuffer[0] = 1;
00763     }
00764     k = REDLENG(j);
00765     if ( k < 0 ) k = -k;
00766     r3 += k;
00767     while ( ( k > 1 ) && ( r3[k-1] == 0 ) ) k--;
00768     if ( ( ( LCMbuffer[0] == 1 ) && ( kLCM == 1 ) ) ) {
00769         for ( kLCM = 0; kLCM < k; kLCM++ )
00770             LCMbuffer[kLCM] = r3[kLCM];
00771     }
00772     else if ( ( k != 1 ) || ( r3[0] != 1 ) ) {
00773         if ( GcdLong(BHEAD LCMbuffer,kLCM, (UWORD *)r3,k,LCMb,&kLCM) ) {
00774             goto onerror;
00775         }
00776         DivLong( (UWORD *)r3,k,LCMb,kLCM,LCMb,&kLCM,LCMc,&jLCM);
00777         Mullong(LCMbuffer,kLCM,LCMb,kLCM,LCMc,&jLCM);
00778         for ( kLCM = 0; kLCM < jLCM; kLCM++ )
00779             LCMbuffer[kLCM] = LCMc[kLCM];
00780     }
00781     else {} /* LCM doesn't change */
00782 }
00783 SetScratch(file,&oldposition); /* Needed until Processor is thread safe */
00784 AR.DeferFlag = olddeferflag;
00785 /*
00786     Now put the term together in oldwork: GCD/LCM
00787     We have already the algebraic contents there.
00788 */
00789     r3 = (WORD *) (GCDbuffer);
00790     r4 = (WORD *) (LCMbuffer);
00791     r1 = oldwork + *oldwork;
00792     if ( kGCD == kLCM ) {
00793         for ( jGCD = 0; jGCD < kGCD; jGCD++ ) *r1++ = *r3++;
00794         for ( jGCD = 0; jGCD < kGCD; jGCD++ ) *r1++ = *r4++;
00795         k = 2*kGCD+1;
00796     }
00797     else if ( kGCD > kLCM ) {
00798         for ( jGCD = 0; jGCD < kGCD; jGCD++ ) *r1++ = *r3++;
00799         for ( jGCD = 0; jGCD < kLCM; jGCD++ ) *r1++ = *r4++;
00800         for ( jGCD = kLCM; jGCD < kGCD; jGCD++ ) *r1++ = 0;
00801         k = 2*kGCD+1;
00802     }
00803     else {
00804         for ( jGCD = 0; jGCD < kGCD; jGCD++ ) *r1++ = *r3++;
00805         for ( jGCD = kGCD; jGCD < kLCM; jGCD++ ) *r1++ = 0;
00806         for ( jGCD = 0; jGCD < kLCM; jGCD++ ) *r1++ = *r4++;
00807         k = 2*kLCM+1;
00808     }
00809     if ( sign < 0 ) *r1++ = -k;
00810     else *r1++ = k;
00811     *oldwork = (WORD) (r1-oldwork);
00812 /*
00813     Now put the new term in the cache
00814 */
00815 Complete:;
00816     if ( AT.previousEfactor ) M_free(AT.previousEfactor,"Efactor cache");
00817     AT.previousEfactor = (WORD *)Malloc1((*oldwork+2)*sizeof(WORD),"Efactor cache");
00818     AT.previousEfactor[0] = expr;
00819     r1 = oldwork; r2 = AT.previousEfactor + 2; k = *oldwork;
00820     NCOPY(r2,r1,k)
00821     AT.previousEfactor[1] = 0;
00822 /*
00823     Now we construct the new term in the workspace.
00824 */
00825 PutTheFactor:;
00826     if ( AT.WorkPointer + AT.previousEfactor[2] >= AT.WorkTop ) {

```



```


00827         MLOCK(ErrorMessageLock);
00828         MesWork();
00829         MesPrint("Called from factorin_");
00830         MUNLOCK(ErrorMessageLock);
00831         NumberFree(GCDBuffer,"FactorInExpr"); NumberFree(GCDBuffer2,"FactorInExpr");
00832         NumberFree(LCMbuffer,"FactorInExpr"); NumberFree(LCMb,"FactorInExpr");
00833         NumberFree(LCMc,"FactorInExpr");
00834         return(-1);
00835     }
00836     n1 = oldwork; n2 = term; while ( n2 < t ) *n1++ = *n2++;
00837     n2 = AT.previousEfactor+2; GETSTOP(n2,n2stop); n3 = n2 + *n2;
00838     n2++; while ( n2 < n2stop ) *n1++ = *n2++;
00839     n2 = t + t[1]; while ( n2 < tstop ) *n1++ = *n2++;
00840     size = term[*term-1];
00841     size = REDLENG(size);
00842     k = n3[-1]; k = REDLENG(k);
00843     if ( MulRat(BHEAD (UWORD *)tstop,size,(UWORD *)n2stop,k,
00844               (UWORD *)n1,&size) ) goto onerror;
00845     size = INCLENG(size);
00846     k = size < 0 ? -size: size;
00847     n1 += k; n1[-1] = size;
00848     *oldwork = n1 - oldwork;
00849     AT.WorkPointer = n1;
00850     if ( Generator(BHEAD oldwork,level) ) {
00851         NumberFree(GCDBuffer,"FactorInExpr"); NumberFree(GCDBuffer2,"FactorInExpr");
00852         NumberFree(LCMbuffer,"FactorInExpr"); NumberFree(LCMb,"FactorInExpr");
00853         NumberFree(LCMc,"FactorInExpr");
00854         return(-1);
00855     }
00856     AT.WorkPointer = oldwork;
00857     AR.CompressPointer = oldcpointer;
00858     NumberFree(GCDBuffer,"FactorInExpr"); NumberFree(GCDBuffer2,"FactorInExpr");
00859     NumberFree(LCMbuffer,"FactorInExpr"); NumberFree(LCMb,"FactorInExpr");
00860     NumberFree(LCMc,"FactorInExpr");
00861     return(0);
00862 onerror:
00863     AT.WorkPointer = oldwork;
00864     AR.CompressPointer = oldcpointer;
00865     MLOCK(ErrorMessageLock);
00866     MesCall("FactorInExpr");
00867     MUNLOCK(ErrorMessageLock);
00868     NumberFree(GCDBuffer,"FactorInExpr"); NumberFree(GCDBuffer2,"FactorInExpr");
00869     NumberFree(LCMbuffer,"FactorInExpr"); NumberFree(LCMb,"FactorInExpr");
00870     NumberFree(LCMc,"FactorInExpr");
00871     return(-1);
00872 }
00873 /*
00874 #] FactorInExpr :
00875 */

```

4.37 findpat.c File Reference

#include "form3.h"

Include dependency graph for findpat.c:

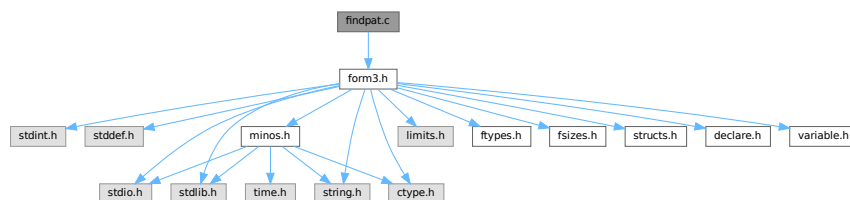

Functions

- int [FindOnly](#) (PHEAD WORD *term, WORD *pattern)
- int [FindOnce](#) (PHEAD WORD *term, WORD *pattern)
- WORD [FindMulti](#) (PHEAD WORD *term, WORD *pattern)
- int [FindRest](#) (PHEAD WORD *term, WORD *pattern)

4.37.1 Detailed Description

Pattern matching of symbols and dotproducts. There are various routines because of the options in the id-statements like once, only, multi and many. These are among the oldest routines in FORM and that can be noticed, because the interplay with the function matching is not complete. When we match functions and halfway we fail we can backtrack properly. With the symbols, the dotproducts and the vectors (in [pattern.c](#)) there is no proper backtracking. Hence the routines here need still quite some work or may even have to be rewritten.

Definition in file [findpat.c](#).

4.37.2 Function Documentation

4.37.2.1 FindOnly()

```
int FindOnly (
    PHEAD WORD * term,
    WORD * pattern )
```

Definition at line 61 of file [findpat.c](#).

4.37.2.2 FindOnce()

```
int FindOnce (
    PHEAD WORD * term,
    WORD * pattern )
```

Definition at line 419 of file [findpat.c](#).

4.37.2.3 FindMulti()

```
WORD FindMulti (
    PHEAD WORD * term,
    WORD * pattern )
```

Definition at line 954 of file [findpat.c](#).

4.37.2.4 FindRest()

```
int FindRest (
    PHEAD WORD * term,
    WORD * pattern )
```

Definition at line 1070 of file [findpat.c](#).

4.38 findpat.c

[Go to the documentation of this file.](#)

```

00001
00013 /* #[ License : */
00014 /*
00015 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00016 *   When using this file you are requested to refer to the publication
00017 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00018 *   This is considered a matter of courtesy as the development was paid
00019 *   for by FOM the Dutch physics granting agency and we would like to
00020 *   be able to track its scientific use to convince FOM of its value
00021 *   for the community.
00022 *
00023 *   This file is part of FORM.
00024 *
00025 *   FORM is free software: you can redistribute it and/or modify it under the
00026 *   terms of the GNU General Public License as published by the Free Software
00027 *   Foundation, either version 3 of the License, or (at your option) any later
00028 *   version.
00029 *
00030 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00031 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00032 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00033 *   details.
00034 *
00035 *   You should have received a copy of the GNU General Public License along
00036 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00037 */
00038 /* #[ License : */
00039 /*
00040     #[ Includes : findpat.c
00041 */
00042 #include "form3.h"
00043
00044 /*
00045     #[ Includes :
00046     #[ Patterns :
00047         #[ FindOnly :          WORD FindOnly(term,pattern)
00048
00049     The current version doesn't scan function arguments yet. 10-Apr-1988
00050
00051     This routine searches for an exact match. This means in particular:
00052     1: x^# must match exactly.
00053     2: x^n? must have a single value for n that cannot be adapted.
00054
00055     When setp != 0 it points to a collection of sets
00056     A match can occur only if no object will be left that belongs
00057     to any of these sets.
00058 */
00059
00060 int FindOnly(PHEAD WORD *term, WORD *pattern)
00061 {
00062     GETBIDENTITY
00063     WORD *t, *m;
00064     WORD *tstop, *mstop;
00065     WORD *xstop, *ystop, *setp = AN.ForFindOnly;
00066     WORD n, nt, *p, nq;
00067     WORD older[NORMSIZE], *q, newval1, newval2, newval3;
00068     AN.UsedOtherFind = 0;
00069     m = pattern;
00070     mstop = m + *m;
00071     t++;
00072     t = term;
00073     t += *term - 1;
00074     tstop = t - ABS(*t) + 1;
00075     t = term;
00076     t++;
00077     while ( t < tstop && *t > DOTPRODUCT ) t += t[1];
00078     while ( m < mstop && *m > DOTPRODUCT ) m += m[1];
00079     if ( m < mstop ) { do {
00080
00081     /*
00082         #[ SYMBOLS :
00083     */
00084         if ( *m == SYMBOL ) {
00085             ystop = m + m[1];
00086             m += 2;
00087             n = 0;
00088             p = older;
00089             if ( t < tstop ) while ( *t != SYMBOL ) {
00090                 t += t[1];
00091                 if ( t >= tstop ) {
00092 OnlyZer1:
00093                     do {

```

```

00094         if ( *m >= 2*MAXPOWER ) return(0);
00095         if ( m[1] >= 2*MAXPOWER ) nt = m[1];
00096         else if ( m[1] <= -2*MAXPOWER ) nt = -m[1];
00097         else return(0);
00098         nt -= 2*MAXPOWER;
00099         if ( CheckWild(BHEAD nt, SYMTONUM, 0, &newval3) ) return(0);
00100         AddWild(BHEAD nt, SYMTONUM, 0);
00101         m += 2;
00102     } while ( m < ystop );
00103     goto EndLoop;
00104 }
00105 }
00106 else goto OnlyZer1;
00107 xstop = t + t[1];
00108 t += 2;
00109 do {
00110     if ( *m == *t && t < xstop ) {
00111         if ( m[1] == t[1] ) { m += 2; t += 2; }
00112         else if ( m[1] >= 2*MAXPOWER ) {
00113             nt = t[1];
00114             nq = m[1];
00115             goto OnlyL2;
00116         }
00117         else if ( m[1] <= -2*MAXPOWER ) {
00118             nt = -t[1];
00119             nq = -m[1];
00120             nq -= 2*MAXPOWER;
00121             if ( CheckWild(BHEAD nq, SYMTONUM, nt, &newval3) ) return(0);
00122             AddWild(BHEAD nq, SYMTONUM, nt);
00123             m += 2;
00124             t += 2;
00125         }
00126         else {
00127             *p++ = *t++; *p++ = *t++; n += 2;
00128         }
00129     }
00130     else if ( *m >= 2*MAXPOWER ) {
00131         while ( t < xstop ) { *p++ = *t++; *p++ = *t++; n += 2; }
00132         nq = n;
00133         p = older;
00134         while ( nq > 0 ) {
00135             if ( !CheckWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, *p, &newval1) ) {
00136                 if ( m[1] == p[1] ) {
00137                     AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newval1);
00138                     break;
00139                 }
00140                 else if ( m[1] >= 2*MAXPOWER && m[1] != *m ) {
00141                     if ( !CheckWild(BHEAD m[1]-2*MAXPOWER, SYMTONUM, p[1], &newval3) ) {
00142                         AddWild(BHEAD m[1]-2*MAXPOWER, SYMTONUM, p[1]);
00143                         AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newval1);
00144                         break;
00145                     }
00146                 }
00147                 else if ( m[1] <= -2*MAXPOWER && m[1] != -( *m ) ) {
00148                     if ( !CheckWild(BHEAD -m[1]-2*MAXPOWER, SYMTONUM, -p[1], &newval3) ) {
00149                         AddWild(BHEAD -m[1]-2*MAXPOWER, SYMTONUM, -p[1]);
00150                         AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newval1);
00151                         break;
00152                     }
00153                 }
00154             }
00155             nq -= 2;
00156             p += 2;
00157         }
00158         if ( nq <= 0 ) return(0);
00159         nq -= 2;
00160         n -= 2;
00161         q = p + 2;
00162         while ( --nq >= 0 ) *p++ = *q++;
00163         m += 2;
00164     }
00165     else {
00166         if ( t >= xstop || *m < *t ) {
00167             if ( m[1] >= 2*MAXPOWER ) nt = m[1];
00168             else if ( m[1] <= -2*MAXPOWER ) nt = -m[1];
00169             else return(0);
00170             nt -= 2*MAXPOWER;
00171             if ( CheckWild(BHEAD nt, SYMTONUM, 0, &newval3) ) return(0);
00172             AddWild(BHEAD nt, SYMTONUM, 0);
00173             m += 2;
00174         }
00175         else {
00176             *p++ = *t++; *p++ = *t++; n += 2;
00177         }
00178     }
00179 } while ( m < ystop );
00180 if ( setp ) {

```

```

00181         while ( t < xstop ) { *p++ = *t++; *p++ = *t++; n+= 2; }
00182     p = older;
00183     while ( n > 0 ) {
00184         nq = setp[1] - 2;
00185         m = setp + 2;
00186         while ( --nq >= 0 ) {
00187             if ( Sets[*m].type != CSYMBOL ) { m++; continue; }
00188             t = SetElements + Sets[*m].first;
00189             tstop = SetElements + Sets[*m].last;
00190             while ( t < tstop ) {
00191                 if ( *t++ == *p ) return(0);
00192             }
00193             m++;
00194         }
00195         n -= 2;
00196         p += 2;
00197     }
00198 }
00199 return(1);
00200 }
00201 /*
00202     #] SYMBOLS :
00203     #[ DOTPRODUCTS :
00204 */
00205 else if ( *m == DOTPRODUCT ) {
00206     ystop = m + m[1];
00207     m += 2;
00208     n = 0;
00209     p = older;
00210     if ( t < tstop ) {
00211         if ( *t < DOTPRODUCT ) goto OnlyZer2;
00212         while ( *t > DOTPRODUCT ) {
00213             t += t[1];
00214             if ( t >= tstop || *t < DOTPRODUCT ) {
00215 OnlyZer2:
00216                 do {
00217                     if ( *m >= (AM.OffsetVector+WILDOFFSET)
00218                         || m[1] >= (AM.OffsetVector+WILDOFFSET) ) return(0);
00219                     if ( m[2] >= 2*MAXPOWER ) nq = m[2];
00220                     else if ( m[2] <= -2*MAXPOWER ) nq = -m[2];
00221                     else return(0);
00222                     nq -= 2*MAXPOWER;
00223                     if ( CheckWild(BHEAD nq, SYMTONUM, 0, &newval3) ) return(0);
00224                     AddWild(BHEAD nq, SYMTONUM, 0);
00225                     m += 3;
00226                 } while ( m < ystop );
00227                 goto EndLoop;
00228             }
00229         }
00230     }
00231     else goto OnlyZer2;
00232     xstop = t + t[1];
00233     t += 2;
00234     do {
00235         if ( *m == *t && m[1] == t[1] && t < xstop ) {
00236             if ( t[2] != m[2] ) {
00237                 if ( m[2] >= 2*MAXPOWER ) {
00238                     nq = m[2];
00239                     nt = t[2];
00240                 }
00241                 else if ( m[2] <= -2*MAXPOWER ) {
00242                     nq = -m[2];
00243                     nt = -t[2];
00244                 }
00245                 else return(0);
00246                 nq -= 2*MAXPOWER;
00247                 if ( CheckWild(BHEAD nq, SYMTONUM, nt, &newval3) ) return(0);
00248                 AddWild(BHEAD nq, SYMTONUM, nt);
00249             }
00250             t += 3; m += 3;
00251         }
00252         else if ( *m >= (AM.OffsetVector+WILDOFFSET) ) {
00253             while ( t < xstop ) {
00254                 *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00255             }
00256             nq = n;
00257             p = older;
00258             while ( nq > 0 ) {
00259                 if ( *m == m[1] ) {
00260                     if ( *p != p[1] ) goto NextInDot;
00261                 }
00262                 if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, *p, &newval1) &&
00263                     !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, p[1], &newval2) ) {
00264                     if ( p[2] == m[2] ) {
00265 OnlyL9:
00266                         AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval2);
00267                         AddWild(BHEAD *m-WILDOFFSET, VECTOVEC, newval1);
00268                         break;

```

```

00268         }
00269         if ( m[2] >= 2*MAXPOWER ) {
00270             if ( !CheckWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2], &newval3) ) {
00271                 AddWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, newval3);
00272                 goto OnlyL9;
00273             }
00274         }
00275         else if ( m[2] <= -2*MAXPOWER ) {
00276             if ( !CheckWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2], &newval3) ) {
00277                 AddWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2]);
00278                 goto OnlyL9;
00279             }
00280         }
00281     }
00282     if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, p[1], &newval1) &&
00283         !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, *p, &newval2) ) {
00284         if ( p[2] == m[2] ) {
00285             OnlyL10: AddWild(BHEAD *m-WILDOFFSET, VECTOVEC, newval1);
00286                 AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval2);
00287                 break;
00288             }
00289             if ( m[2] >= 2*MAXPOWER ) {
00290                 if ( !CheckWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2], &newval3) ) {
00291                     AddWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2]);
00292                     goto OnlyL10;
00293                 }
00294             }
00295             else if ( m[2] <= -2*MAXPOWER ) {
00296                 if ( !CheckWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2], &newval3) ) {
00297                     AddWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2]);
00298                     goto OnlyL10;
00299                 }
00300             }
00301         }
00302     NextInDot:
00303         p += 3; nq -= 3;
00304     }
00305     if ( nq <= 0 ) return(0);
00306     q = p+3;
00307     nq -= 3;
00308     n -= 3;
00309     while ( --nq >= 0 ) *p++ = *q++;
00310     m += 3;
00311 }
00312 else if ( m[1] >= (AM.OffsetVector+WILDOFFSET) ) {
00313     while ( *m >= *t && t < xstop ) {
00314         *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00315     }
00316     nq = n;
00317     p = older;
00318     while ( nq > 0 ) {
00319         if ( *m == *p && !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, p[1], &newval1) ) {
00320             if ( p[2] == m[2] ) {
00321                 AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00322                 break;
00323             }
00324             else if ( m[2] >= 2*MAXPOWER ) {
00325                 if ( !CheckWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2], &newval3) ) {
00326                     AddWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2]);
00327                     AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00328                     break;
00329                 }
00330             }
00331             else if ( m[2] <= -2*MAXPOWER ) {
00332                 if ( !CheckWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2], &newval3) ) {
00333                     AddWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2]);
00334                     AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00335                     break;
00336                 }
00337             }
00338         }
00339         if ( *m == p[1] && !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, *p, &newval1) ) {
00340             if ( p[2] == m[2] ) {
00341                 AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00342                 break;
00343             }
00344             if ( m[2] >= 2*MAXPOWER ) {
00345                 if ( !CheckWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2], &newval3) ) {
00346                     AddWild(BHEAD m[2]-2*MAXPOWER, SYMTONUM, p[2]);
00347                     AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00348                     break;
00349                 }
00350             }
00351             else if ( m[2] <= -2*MAXPOWER ) {
00352                 if ( !CheckWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2], &newval3) ) {
00353                     AddWild(BHEAD -m[2]-2*MAXPOWER, SYMTONUM, -p[2]);
00354                     AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);

```

```

00355                                     break;
00356                                     }
00357                                     }
00358                                     }
00359                                     p += 3; nq -= 3;
00360                                     }
00361                                     if ( nq <= 0 ) return(0);
00362                                     q = p+3;
00363                                     nq -= 3;
00364                                     n -= 3;
00365                                     while ( --nq >= 0 ) *p++ = *q++;
00366                                     m += 3;
00367                                     }
00368                                     else {
00369                                     if ( t >= xstop || *m < *t || ( *m == *t && m[1] < t[1] ) ) {
00370                                     if ( m[2] > 2*MAXPOWER ) nt = m[2];
00371                                     else if ( m[2] <= -2*MAXPOWER ) nt = -m[2];
00372                                     else return(0);
00373                                     nt -= 2*MAXPOWER;
00374                                     if ( CheckWild(BHEAD nt, SYMTONUM, 0, &newval3) ) return(0);
00375                                     AddWild(BHEAD nt, SYMTONUM, 0);
00376                                     m += 3;
00377                                     }
00378                                     else {
00379                                     *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00380                                     }
00381                                     }
00382                                     } while ( m < ystop );
00383                                     t = xstop;
00384                                     }
00385                                     /*
00386                                     #] DOTPRODUCTS :
00387                                     */
00388                                     else {
00389                                     MLOCK(ErrorMessageLock);
00390                                     MesPrint("Error in pattern(1)");
00391                                     MUNLOCK(ErrorMessageLock);
00392                                     Terminate(-1);
00393                                     }
00394                                     EndLoop;;
00395                                     } while ( m < mstop ); }
00396                                     if ( setp ) {
00397                                     /*
00398                                     while ( t < tstop && *t > SYMBOL ) t += t[1];
00399                                     if ( t < tstop && setp[1] > 2 ) return(0);
00400                                     */
00401                                     /* There were nonempty sets */
00402                                     /* Empty sets are rejected by the compiler */
00403                                     }
00404                                     return(1);
00405                                     }
00406                                     }
00407                                     /*
00408                                     #] FindOnly :
00409                                     #[ FindOnce :          WORD FindOnce(term,pattern)
00410
00411                                     Searches for a single match in term. The difference with multi
00412                                     lies mainly in the fact that here functions may occur.
00413                                     The functions have not been implemented yet. (10-Apr-1988)
00414                                     Wildcard powers are adjustable. The value closer to zero is taken.
00415                                     Positive and negative gives (o surprise) zero.
00416
00417                                     */
00418
00419                                     int FindOnce(PHEAD WORD *term, WORD *pattern)
00420                                     {
00421                                     GETBIDENTITY
00422                                     WORD *t, *m;
00423                                     WORD *tstop, *mstop;
00424                                     WORD *xstop, *ystop;
00425                                     WORD n, nt, *p, nq, mt, ch;
00426                                     WORD older[2*NORMSIZE], *q, newval1, newval2, newval3;
00427                                     AN.UsedOtherFind = 0;
00428                                     m = pattern;
00429                                     mstop = m + *m;
00430                                     m++;
00431                                     t = term;
00432                                     t += *term - 1;
00433                                     tstop = t - ABS(*t) + 1;
00434                                     t = term;
00435                                     t++;
00436                                     while ( t < tstop && *t > DOTPRODUCT ) t += t[1];
00437                                     while ( m < mstop && *m > DOTPRODUCT ) m += m[1];
00438                                     if ( m < mstop ) { do {
00439                                     /*
00440                                     #[ SYMBOLS :
00441                                     */

```

```

00442         if ( *m == SYMBOL ) {
00443             ystop = m + m[1];
00444             m += 2;
00445             n = 0;
00446             p = older;
00447             if ( t < tstop ) while ( *t != SYMBOL ) {
00448                 t += t[1];
00449                 if ( t >= tstop ) {
00450 TryZero:
00451                     do {
00452                         if ( *m >= 2*MAXPOWER ) return(0);
00453                         if ( m[1] >= 2*MAXPOWER ) nt = m[1];
00454                         else if ( m[1] <= -2*MAXPOWER ) nt = -m[1];
00455                         else return(0);
00456                         nt -= 2*MAXPOWER;
00457                         if ( ( ch = CheckWild(BHEAD nt, SYMTONUM, 0, &newval3) ) != 0 ) {
00458                             if ( ch > 1 ) return(0);
00459                             if ( AN.oldtype != SYMTONUM ) return(0);
00460                             if ( *AN.MaskPointer == 2 ) return(0);
00461                         }
00462                         AddWild(BHEAD nt, SYMTONUM, 0);
00463                         m += 2;
00464                     } while ( m < ystop );
00465                     goto EndLoop;
00466                 }
00467             }
00468             else goto TryZero;
00469             xstop = t + t[1];
00470             t += 2;
00471             do {
00472                 if ( *m == *t && t < xstop ) {
00473                     nt = t[1];
00474                     mt = m[1];
00475                     if ( ( mt > 0 && mt <= nt ) ||
00476                         ( mt < 0 && mt >= nt ) ) { m += 2; t += 2; }
00477                     else if ( mt >= 2*MAXPOWER ) goto OnceL2;
00478                     else if ( mt <= -2*MAXPOWER ) {
00479                         nt = -nt;
00480                         mt = -mt;
00481 OnceL2:
00482                         if ( ( ch = CheckWild(BHEAD mt, SYMTONUM, nt, &newval3) ) != 0 ) {
00483                             if ( ch > 1 ) return(0);
00484                             if ( AN.oldtype != SYMTONUM ) return(0);
00485                             if ( AN.oldvalue <= 0 ) {
00486                                 if ( nt < AN.oldvalue ) nt = AN.oldvalue;
00487                                 else {
00488                                     if ( *AN.MaskPointer == 2 ) return(0);
00489                                     if ( nt > 0 ) nt = 0;
00490                                 }
00491                             }
00492                             if ( AN.oldvalue >= 0 ) {
00493                                 if ( nt > AN.oldvalue ) nt = AN.oldvalue;
00494                                 else {
00495                                     if ( *AN.MaskPointer == 2 ) return(0);
00496                                     if ( nt < 0 ) nt = 0;
00497                                 }
00498                             }
00499                         }
00500                         AddWild(BHEAD mt, SYMTONUM, nt);
00501                         m += 2;
00502                         t += 2;
00503                     }
00504                     else {
00505                         *p++ = *t++; *p++ = *t++; n += 2;
00506                     }
00507                 }
00508             } else if ( *m >= 2*MAXPOWER ) {
00509                 while ( t < xstop ) { *p++ = *t++; *p++ = *t++; n += 2; }
00510                 nq = n;
00511                 p = older;
00512                 while ( nq > 0 ) {
00513                     nt = p[1];
00514                     if ( !CheckWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, *p, &newval1) ) {
00515                         mt = m[1];
00516                         if ( ( mt > 0 && mt <= nt ) ||
00517                             ( mt < 0 && mt >= nt ) ) {
00518                             AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newval1);
00519                             break;
00520                         }
00521                     }
00522                     else if ( mt >= 2*MAXPOWER && mt != *m ) {
00523                         mt -= 2*MAXPOWER;
00524                         if ( ( ch = CheckWild(BHEAD mt, SYMTONUM, nt, &newval3) ) != 0 ) {
00525                             if ( ch > 1 ) return(0);
00526                             if ( AN.oldtype == SYMTONUM ) {
00527                                 if ( AN.oldvalue >= 0 ) {
00528                                     if ( nt > AN.oldvalue ) nt = AN.oldvalue;
00529                                 }
00530                             }
00531                             else {
00532                                 if ( *AN.MaskPointer == 2 ) return(0);
00533                                 if ( nt < 0 ) nt = 0;
00534                             }
00535                         }
00536                     }
00537                 }
00538             }
00539         }
00540     }
00541 }

```



```

00529                                     if ( *AN.MaskPointer == 2 ) return(0);
00530                                     if ( nt < 0 ) nt = 0;
00531                                     }
00532                                     }
00533                                     else {
00534                                         if ( nt < AN.oldvalue ) nt = AN.oldvalue;
00535                                         else {
00536                                             if ( *AN.MaskPointer == 2 ) return(0);
00537                                             if ( nt > 0 ) nt = 0;
00538                                         }
00539                                     }
00540                                     AddWild(BHEAD mt, SYMTONUM, nt);
00541                                     AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newval1);
00542                                     break;
00543                                 }
00544                             }
00545                             else {
00546                                 AddWild(BHEAD mt, SYMTONUM, nt);
00547                                 AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newval1);
00548                                 break;
00549                             }
00550                         }
00551                         else if ( mt <= -2*MAXPOWER && mt != -( *m ) ) {
00552                             nt = -nt;
00553                             mt = -mt;
00554                             goto OnceL4a;
00555                         }
00556                     }
00557                     nq -= 2;
00558                     p += 2;
00559                 }
00560                 if ( nq <= 0 ) return(0);
00561                 nq -= 2;
00562                 n -= 2;
00563                 q = p + 2;
00564                 while ( --nq >= 0 ) *p++ = *q++;
00565                 m += 2;
00566             }
00567             else {
00568                 if ( t >= xstop || *m < *t ) {
00569                     if ( m[1] >= 2*MAXPOWER ) nt = m[1];
00570                     else if ( m[1] <= -2*MAXPOWER ) nt = -m[1];
00571                     else return(0);
00572                     nt -= 2*MAXPOWER;
00573                     if ( ( ch = CheckWild(BHEAD nt, SYMTONUM, 0, &newval3) ) != 0 ) {
00574                         if ( ch > 1 ) return(0);
00575                         if ( AN.oldtype != SYMTONUM ) return(0);
00576                         if ( *AN.MaskPointer == 2 ) return(0);
00577                     }
00578                     AddWild(BHEAD nt, SYMTONUM, 0);
00579                     m += 2;
00580                 }
00581                 else {
00582                     *p++ = *t++; *p++ = *t++; n += 2;
00583                 }
00584             }
00585         } while ( m < ystop );
00586     }
00587 /*
00588     #] SYMBOLS :
00589     #[ DOTPRODUCTS :
00590 */
00591     else if ( *m == DOTPRODUCT ) {
00592         ystop = m + m[1];
00593         m += 2;
00594         n = 0;
00595         p = older;
00596         if ( t < tstop ) {
00597             if ( *t < DOTPRODUCT ) goto OnceOp;
00598             while ( *t > DOTPRODUCT ) {
00599                 t += t[1];
00600                 if ( t >= tstop || *t < DOTPRODUCT ) {
00601 OnceOp:
00602                     do {
00603                         if ( *m >= (AM.OffsetVector+WILDOFFSET)
00604                             || m[1] >= (AM.OffsetVector+WILDOFFSET) ) return(0);
00605                         if ( m[2] >= 2*MAXPOWER ) {
00606                             nq = m[2] - 2*MAXPOWER;
00607                         }
00608                         else if ( m[2] <= -2*MAXPOWER ) {
00609                             nq = -m[2] - 2*MAXPOWER;
00610                         }
00611                         else return(0);
00612                         if ( CheckWild(BHEAD nq, SYMTONUM, (WORD)0, &newval3) ) {
00613                             if ( AN.oldtype != SYMTONUM ) return(0);
00614                             if ( *AN.MaskPointer == 2 ) return(0);
00615                         }

```

```

00616             AddWild(BHEAD nq, SYMTONUM, (WORD) 0);
00617             m += 3;
00618         } while ( m < ystop );
00619         goto EndLoop;
00620     }
00621 }
00622 }
00623 else goto OnceOp;
00624 xstop = t + t[1];
00625 t += 2;
00626 do {
00627     if ( *m == *t && m[1] == t[1] && t < xstop ) {
00628         nt = t[2];
00629         mt = m[2];
00630 /*
00631         if ( ( nt > 0 && nt < mt ) ||
00632             ( nt < 0 && nt > mt ) ) {
00633             if ( mt <= -2*MAXPOWER ) {
00634                 mt = -mt;
00635                 nt = -nt;
00636             }
00637             else if ( mt < 2*MAXPOWER ) return(0);
00638             mt -= 2*MAXPOWER;
00639             if ( CheckWild(BHEAD mt, SYMTONUM, nt, &newval3) ) {
00640                 if ( AN.oldtype != SYMTONUM ) return(0);
00641                 if ( AN.oldvalue <= 0 ) {
00642                     if ( nt < AN.oldvalue ) nt = AN.oldvalue;
00643                     else {
00644                         if ( *AN.MaskPointer == 2 ) return(0);
00645                         if ( nt > 0 ) nt = 0;
00646                     }
00647                 }
00648                 if ( AN.oldvalue >= 0 ) {
00649                     if ( nt > AN.oldvalue ) nt = AN.oldvalue;
00650                     else {
00651                         if ( *AN.MaskPointer == 2 ) return(0);
00652                         if ( nt < 0 ) nt = 0;
00653                     }
00654                 }
00655             }
00656             AddWild(BHEAD mt, SYMTONUM, nt);
00657             m += 3; t += 3;
00658         }
00659     else if ( ( nt > 0 && nt >= mt && mt > -2*MAXPOWER )
00660 || ( nt < 0 && nt <= mt && mt < 2*MAXPOWER ) ) {
00661         m += 3; t += 3;
00662     }
00663 */
00664     if ( ( mt > 0 && mt <= nt ) ||
00665         ( mt < 0 && mt >= nt ) ) { m += 3; t += 3; }
00666     else if ( mt >= 2*MAXPOWER ) goto OnceL7;
00667     else if ( mt <= -2*MAXPOWER ) {
00668         nt = -nt;
00669         mt = -mt;
00670         mt -= 2*MAXPOWER;
00671     OnceL7:
00672         if ( CheckWild(BHEAD mt, SYMTONUM, nt, &newval3) ) {
00673             if ( AN.oldtype != SYMTONUM ) return(0);
00674             if ( AN.oldvalue <= 0 ) {
00675                 if ( nt < AN.oldvalue ) nt = AN.oldvalue;
00676                 else {
00677                     if ( *AN.MaskPointer == 2 ) return(0);
00678                     if ( nt > 0 ) nt = 0;
00679                 }
00680             }
00681             if ( AN.oldvalue >= 0 ) {
00682                 if ( nt > AN.oldvalue ) nt = AN.oldvalue;
00683                 else {
00684                     if ( *AN.MaskPointer == 2 ) return(0);
00685                     if ( nt < 0 ) nt = 0;
00686                 }
00687             }
00688             AddWild(BHEAD mt, SYMTONUM, nt);
00689             m += 3;
00690             t += 3;
00691         }
00692     else {
00693         *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00694     }
00695 }
00696 else if ( *m >= (AM.OffsetVector+WILDOFFSET) ) {
00697     while ( t < xstop ) {
00698         *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00699     }
00700     nq = n;
00701     p = older;
00702     while ( nq > 0 ) {

```

```

00703         if ( *m == m[1] ) {
00704             if ( *p != p[1] ) goto NextInDot;
00705         }
00706     if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, *p, &newval1) &&
00707         !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, p[1], &newval2) ) {
00708         nt = p[2];
00709         mt = m[2];
00710         if ( ( mt > 0 && nt >= mt ) ||
00711             ( mt < 0 && nt <= mt ) ) {
00712             OnceL9:
00713                 AddWild(BHEAD *m-WILDOFFSET, VECTOVEC, newval1);
00714                 AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval2);
00715                 break;
00716         }
00717         OnceL9a:
00718             if ( mt >= 2*MAXPOWER ) {
00719                 mt -= 2*MAXPOWER;
00720                 if ( CheckWild(BHEAD mt, SYMTONUM, nt, &newval3) ) {
00721                     if ( AN.OLDTYPE == SYMTONUM ) {
00722                         if ( AN.OLDVALUE >= 0 ) {
00723                             if ( nt > AN.OLDVALUE ) nt = AN.OLDVALUE;
00724                             else {
00725                                 if ( *AN.MaskPointer == 2 ) return(0);
00726                                 if ( nt < 0 ) nt = 0;
00727                             }
00728                         }
00729                         else {
00730                             if ( nt < AN.OLDVALUE ) nt = AN.OLDVALUE;
00731                             else {
00732                                 if ( *AN.MaskPointer == 2 ) return(0);
00733                                 if ( nt > 0 ) nt = 0;
00734                             }
00735                         }
00736                     }
00737                     AddWild(BHEAD mt, SYMTONUM, nt);
00738                     goto OnceL9;
00739                 }
00740             }
00741             else if ( mt <= -2*MAXPOWER ) {
00742                 mt = -mt;
00743                 nt = -nt;
00744                 goto OnceL9a;
00745             }
00746         }
00747     }
00748     if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, p[1], &newval1) &&
00749         !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, *p, &newval2) ) {
00750         nt = p[2];
00751         mt = m[2];
00752         if ( ( mt > 0 && nt >= mt ) ||
00753             ( mt < 0 && nt <= mt ) ) {
00754             OnceL10:
00755                 AddWild(BHEAD *m-WILDOFFSET, VECTOVEC, newval1);
00756                 AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval2);
00757                 break;
00758         }
00759         OnceL10a:
00760             if ( mt >= 2*MAXPOWER ) {
00761                 mt -= 2*MAXPOWER;
00762                 if ( CheckWild(BHEAD mt, SYMTONUM, nt, &newval3) ) {
00763                     if ( AN.OLDTYPE == SYMTONUM ) {
00764                         if ( AN.OLDVALUE >= 0 ) {
00765                             if ( nt > AN.OLDVALUE ) nt = AN.OLDVALUE;
00766                             else {
00767                                 if ( *AN.MaskPointer == 2 ) return(0);
00768                                 if ( nt < 0 ) nt = 0;
00769                             }
00770                         }
00771                         else {
00772                             if ( nt < AN.OLDVALUE ) nt = AN.OLDVALUE;
00773                             else {
00774                                 if ( *AN.MaskPointer == 2 ) return(0);
00775                                 if ( nt > 0 ) nt = 0;
00776                             }
00777                         }
00778                     }
00779                     AddWild(BHEAD mt, SYMTONUM, nt);
00780                     goto OnceL10;
00781                 }
00782             }
00783             else if ( mt <= -2*MAXPOWER ) {
00784                 mt = -mt;
00785                 nt = -nt;
00786                 goto OnceL10a;
00787             }
00788         }
00789     }

```

```

00790         }
00791     }
00792 NextInDot:
00793     p += 3; nq -= 3;
00794 }
00795 if ( nq <= 0 ) return(0);
00796 else {
00797     q = p+3;
00798     nq -= 3;
00799     n -= 3;
00800     while ( --nq >= 0 ) *p++ = *q++;
00801 }
00802 m += 3;
00803 }
00804 else if ( m[1] >= (AM.OffsetVector+WILDOFFSET) ) {
00805     while ( *m >= *t && t < xstop ) {
00806         *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00807     }
00808     nq = n;
00809     p = older;
00810     while ( nq > 0 ) {
00811         if ( *m == *p && !CheckWild(BHEAD m[1]-WILDOFFSET,
00812             VECTOVEC,p[1],&newval1) ) {
00813             nt = p[2];
00814             mt = m[2];
00815             if ( ( mt > 0 && nt >= mt ) ||
00816                 ( mt < 0 && nt <= mt ) ) {
00817                 AddWild(BHEAD m[1]-WILDOFFSET,VECTOVEC,newval1);
00818                 break;
00819             }
00820             else if ( mt >= 2*MAXPOWER ) {
00821                 mt -= 2*MAXPOWER;
00822                 if ( CheckWild(BHEAD mt,SYMTONUM,nt,&newval3) ) {
00823                     if ( AN.oldtype == SYMTONUM ) {
00824                         if ( AN.oldvalue >= 0 ) {
00825                             if ( nt > AN.oldvalue ) nt = AN.oldvalue;
00826                             else {
00827                                 if ( *AN.MaskPointer == 2 ) return(0);
00828                                 if ( nt < 0 ) nt = 0;
00829                             }
00830                         }
00831                         else {
00832                             if ( nt < AN.oldvalue ) nt = AN.oldvalue;
00833                             else {
00834                                 if ( *AN.MaskPointer == 2 ) return(0);
00835                                 if ( nt > 0 ) nt = 0;
00836                             }
00837                         }
00838                         AddWild(BHEAD mt,SYMTONUM,nt);
00839                         AddWild(BHEAD m[1]-WILDOFFSET,VECTOVEC,newval1);
00840                         break;
00841                     }
00842                 }
00843                 else {
00844                     AddWild(BHEAD mt,SYMTONUM,nt);
00845                     AddWild(BHEAD m[1]-WILDOFFSET,VECTOVEC,newval1);
00846                     break;
00847                 }
00848             }
00849             else if ( mt <= -2*MAXPOWER ) {
00850                 mt = -mt;
00851                 nt = -nt;
00852                 goto OnceL7a;
00853             }
00854         }
00855         if ( *m == p[1] && !CheckWild(BHEAD m[1]-WILDOFFSET,
00856             VECTOVEC,*p,&newval1) ) {
00857             nt = p[2];
00858             mt = m[2];
00859             if ( ( mt > 0 && nt >= mt ) ||
00860                 ( mt < 0 && nt <= mt ) ) {
00861                 AddWild(BHEAD m[1]-WILDOFFSET,VECTOVEC,newval1);
00862                 break;
00863             }
00864             if ( mt >= 2*MAXPOWER ) {
00865                 mt -= 2*MAXPOWER;
00866                 if ( CheckWild(BHEAD mt,SYMTONUM,nt,&newval3) ) {
00867                     if ( AN.oldtype == SYMTONUM ) {
00868                         if ( AN.oldvalue >= 0 ) {
00869                             if ( nt > AN.oldvalue ) nt = AN.oldvalue;
00870                             else {
00871                                 if ( *AN.MaskPointer == 2 ) return(0);
00872                                 if ( nt < 0 ) nt = 0;
00873                             }
00874                         }
00875                         else {
00876                             if ( nt < AN.oldvalue ) nt = AN.oldvalue;

```

```

00877                                     else {
00878                                         if ( *AN.MaskPointer == 2 ) return(0);
00879                                         if ( nt > 0 ) nt = 0;
00880                                     }
00881                                 }
00882                                 AddWild(BHEAD mt, SYMNUM, nt);
00883                                 AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00884                                 break;
00885                             }
00886                         }
00887                         else {
00888                             AddWild(BHEAD mt, SYMNUM, nt);
00889                             AddWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, newval1);
00890                             break;
00891                         }
00892                     }
00893                     else if ( mt < -2*MAXPOWER ) {
00894                         mt = -mt;
00895                         nt = -nt;
00896                         goto OnceL8a;
00897                     }
00898                 }
00899                 p += 3; nq -= 3;
00900             }
00901             if ( nq <= 0 ) return(0);
00902             q = p+3;
00903             nq -= 3;
00904             n -= 3;
00905             while ( --nq >= 0 ) *p++ = *q++;
00906             m += 3;
00907         }
00908         else {
00909             if ( t >= xstop || *m < *t || ( *m == *t && m[1] < t[1] ) ) {
00910                 if ( m[2] >= 2*MAXPOWER ) nt = m[2];
00911                 else if ( m[2] <= -2*MAXPOWER ) nt = -m[2];
00912                 else return(0);
00913                 nt -= 2*MAXPOWER;
00914                 if ( CheckWild(BHEAD nt, SYMNUM, 0, &newval3) ) {
00915                     if ( AN.oldtype != SYMNUM ) return(0);
00916                     if ( *AN.MaskPointer == 2 ) return(0);
00917                 }
00918                 AddWild(BHEAD nt, SYMNUM, 0);
00919                 m += 3;
00920             }
00921             else {
00922                 *p++ = *t++; *p++ = *t++; *p++ = *t++; n += 3;
00923             }
00924         }
00925     } while ( m < ystop );
00926     t = xstop;
00927 }
00928 /*
00929     #] DOTPRODUCTS :
00930 */
00931 else {
00932     MLOCK(ErrorMessageLock);
00933     MesPrint("Error in pattern(2)");
00934     MUNLOCK(ErrorMessageLock);
00935     Terminate(-1);
00936 }
00937 EndLoop;;
00938 } while ( m < mstop ); }
00939 else {
00940     return(-1);
00941 }
00942 return(1);
00943 }
00944
00945 /*
00946     #] FindOnce :
00947     #[ FindMulti :      WORD FindMulti(term, pattern)
00948
00949     Note that multi cannot deal with wildcards. Those patterns revert
00950     to many which gives subsequent calls to once.
00951 */
00952 /*
00953
00954 WORD FindMulti(PHEAD WORD *term, WORD *pattern)
00955 {
00956     GETBIDENTITY
00957     WORD *t, *m, *p;
00958     WORD *tstop, *mstop;
00959     WORD *xstop, *ystop;
00960     WORD mt, power, n, nq;
00961     WORD older[2*NORMSIZE], *q, newval1;
00962     AN.UsedOtherFind = 0;
00963     m = pattern;

```

```

00964     mstop = m + *m;
00965     m++;
00966     t = term;
00967     t += *term - 1;
00968     tstop = t - ABS(*t) + 1;
00969     t = term;
00970     t++;
00971     while ( t < tstop && *t > DOTPRODUCT ) t += t[1];
00972     while ( m < mstop && *m > DOTPRODUCT ) m += m[1];
00973     power = -1; /* No power yet */
00974     if ( m < mstop ) { do {
00975 /*
00976         #] SYMBOLS :
00977 */
00978         if ( *m == SYMBOL ) {
00979             ystop = m + m[1];
00980             m += 2;
00981             if ( t >= tstop ) return(0);
00982             while ( *t != SYMBOL ) { t += t[1]; if ( t >= tstop ) return(0); }
00983             xstop = t + t[1];
00984             t += 2;
00985             p = older;
00986             n = 0;
00987             do {
00988                 if ( *m >= 2*MAXPOWER ) {
00989                     while ( t < xstop ) { *p++ = *t++; *p++ = *t++; n += 2; }
00990                     nq = n;
00991                     p = older;
00992                     while ( nq > 0 ) {
00993                         if ( !CheckWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, *p, &newvall) ) {
00994                             mt = p[1]/m[1];
00995                             if ( mt > 0 ) {
00996                                 if ( power < 0 || mt < power ) power = mt;
00997                                 AddWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, newvall);
00998                                 break;
00999                             }
01000                         }
01001                         nq -= 2;
01002                         p += 2;
01003                     }
01004                     if ( nq <= 0 ) return(0);
01005                     nq -= 2;
01006                     n -= 2;
01007                     q = p + 2;
01008                     while ( --nq >= 0 ) *p++ = *q++;
01009                     m += 2;
01010                 }
01011                 else if ( t >= xstop ) return(0);
01012                 else if ( *m == *t ) {
01013                     if ( ( mt = t[1]/m[1] ) <= 0 ) return(0);
01014                     if ( power < 0 || mt < power ) power = mt;
01015                     m += 2;
01016                     t += 2;
01017                 }
01018                 else if ( *m < *t ) return(0);
01019                 else { *p++ = *t++; *p++ = *t++; n += 2; }
01020             } while ( m < ystop );
01021         }
01022 /*
01023         #] SYMBOLS :
01024         #] DOTPRODUCTS :
01025 */
01026         else if ( *m == DOTPRODUCT ) {
01027             ystop = m + m[1];
01028             m += 2;
01029             if ( t >= tstop ) return(0);
01030             while ( *t != DOTPRODUCT ) { t += t[1]; if ( t >= tstop ) return(0); }
01031             xstop = t + t[1];
01032             t += 2;
01033             do {
01034                 if ( t >= xstop ) return(0);
01035                 if ( *t == *m ) {
01036                     if ( t[1] == m[1] ) {
01037                         if ( ( mt = t[2]/m[2] ) <= 0 ) return(0);
01038                         if ( power < 0 || mt < power ) power = mt;
01039                         m += 3;
01040                     }
01041                     else if ( t[1] > m[1] ) return(0);
01042                 }
01043                 else if ( *t > *m ) return(0);
01044                 t += 3;
01045             } while ( m < ystop );
01046             t = xstop;
01047         }
01048 /*
01049         #] DOTPRODUCTS :
01050 */

```

```

01051         else {
01052             MLOCK(ErrorMessageLock);
01053             MesPrint("Error in pattern(3)");
01054             MUNLOCK(ErrorMessageLock);
01055             Terminate(-1);
01056         }
01057     } while ( m < mstop ); }
01058     if ( power < 0 ) power = 0;
01059     return(power);
01060 }
01061
01062 /*
01063     #] FindMulti :
01064     #[ FindRest :          WORD FindRest(term,pattern)
01065
01066     This routine scans for anything but dotproducts and symbols.
01067
01068 */
01069
01070 int FindRest(PHEAD WORD *term, WORD *pattern)
01071 {
01072     GETBIDENTITY
01073     WORD *t, *m, *tt, wild, regular;
01074     WORD *tstop, *mstop;
01075     WORD *xstop, *ystop;
01076     WORD n, *p, nq;
01077     WORD older[NORMSIZE], *q, newval1, newval2;
01078     int i, ntw;
01079     AN.UsedOtherFind = 0;
01080     AN.findTerm = term; AN.findPattern = pattern;
01081     m = AN.WildValue;
01082     i = (m[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
01083     ntw = 0;
01084     while ( i > 0 ) {
01085         if ( m[0] == ARGTOARG ) ntw++;
01086         m += m[1];
01087         i--;
01088     }
01089     t = term;
01090     t += *term - 1;
01091     tstop = t - ABS(*t) + 1;
01092     t = term;
01093     t++; p = t;
01094     while ( t < tstop && *t > DOTPRODUCT ) t += t[1];
01095     tstop = t;
01096     t = p;
01097     m = pattern;
01098     mstop = m + *m;
01099     m++;
01100     p = m;
01101     while ( m < mstop && *m > DOTPRODUCT ) m += m[1];
01102     mstop = m;
01103     m = p;
01104     if ( m < mstop ) {
01105         do {
01106             /*
01107                 #[ FUNCTIONS :
01108             */
01109             if ( *m >= FUNCTION ) {
01110                 if ( *mstop > 5 && !MatchIsPossible(pattern,term) ) return(0);
01111                 ystop = m;
01112                 n = 0;
01113                 do {
01114                     m += m[1]; n++;
01115                 } while ( m < mstop && *m >= FUNCTION );
01116                 AT.WorkPointer += n;
01117                 while ( t < tstop && *t == SUBEXPRESSION ) t += t[1];
01118                 tt = xstop = t;
01119                 nq = 0;
01120                 while ( t < tstop && ( *t >= FUNCTION || *t == SUBEXPRESSION ) ) {
01121                     if ( *t != SUBEXPRESSION ) {
01122                         nq++;
01123                         if ( functions[*t-FUNCTION].commute ) tt = t + t[1];
01124                     }
01125                     t += t[1];
01126                 }
01127                 if ( nq < n ) return(0);
01128                 AN.terstart = term;
01129                 AN.terstop = t;
01130                 AN.terfirstcomm = tt;
01131                 AN.patstop = m;
01132                 AN.NumTotWildArgs = ntw;
01133                 if ( !ScanFunctions(BHEAD ystop,xstop,0) ) return(0);
01134             }
01135             /*
01136                 #] FUNCTIONS :
01137                 #[ VECTORS :

```

```

01138 */
01139     else if ( *m == VECTOR ) {
01140         while ( t < tstop && *t != VECTOR ) t += t[1];
01141         if ( t >= tstop ) return(0);
01142         xstop = t + t[1];
01143         ystop = m + m[1];
01144         t += 2;
01145         m += 2;
01146         n = 0;
01147         p = older;
01148         do {
01149             if ( *m == *t && m[1] == t[1] && t < xstop ) {
01150                 m += 2; t += 2;
01151             }
01152             else if ( *m >= (AM.OffsetVector+WILDOFFSET) ) {
01153                 if ( t < xstop ) {
01154                     p = older + n;
01155                     do { *p++ = *t++; n++; } while ( t < xstop );
01156                 }
01157                 p = older;
01158                 nq = n;
01159                 if ( ( m[1] < (AM.OffsetIndex+WILDOFFSET) )
01160                     || ( m[1] >= (AM.OffsetIndex+2*WILDOFFSET) ) ) {
01161                     while ( nq > 0 ) {
01162                         if ( m[1] == p[1] ) {
01163                             if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, *p, &newval1) ) {
01164 RestL11: AddWild(BHEAD *m-WILDOFFSET, VECTOVEC, newval1);
01165                             break;
01166                         }
01167                     }
01168                     p += 2;
01169                     nq -= 2;
01170                 }
01171             }
01172             else { /* Double wildcard */
01173                 while ( nq > 0 ) {
01174                     if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, *p, &newval1) &&
01175                         !CheckWild(BHEAD m[1]-WILDOFFSET, INDTOIND, p[1], &newval2) ) {
01176                         AddWild(BHEAD m[1]-WILDOFFSET, INDTOIND, newval2);
01177                         goto RestL11;
01178                     }
01179                     p += 2;
01180                     nq -= 2;
01181                 }
01182             }
01183             if ( nq > 0 ) {
01184                 nq -= 2; q = p + 2; n -= 2;
01185                 while ( --nq >= 0 ) *p++ = *q++;
01186             }
01187             else return(0);
01188             m += 2;
01189         }
01190         else if ( ( *m <= *t )
01191             && ( m[1] >= (AM.OffsetIndex + WILDOFFSET) )
01192             && ( m[1] < (AM.OffsetIndex + 2*WILDOFFSET) ) ) {
01193             if ( *m == *t && t < xstop ) {
01194                 p = older;
01195                 p += n;
01196                 *p++ = *t++;
01197                 *p++ = *t++;
01198                 n += 2;
01199             }
01200             p = older;
01201             nq = n;
01202             while ( nq > 0 ) {
01203                 if ( *m == *p ) {
01204                     if ( !CheckWild(BHEAD m[1]-WILDOFFSET, INDTOIND, p[1], &newval1) ) {
01205                         AddWild(BHEAD m[1]-WILDOFFSET, INDTOIND, newval1);
01206                         break;
01207                     }
01208                 }
01209                 p += 2;
01210                 nq -= 2;
01211             }
01212             if ( nq > 0 ) {
01213                 nq -= 2; q = p + 2; n -= 2;
01214                 while ( --nq >= 0 ) *p++ = *q++;
01215             }
01216             else return(0);
01217             m += 2;
01218         }
01219         else {
01220             if ( t >= xstop ) return(0);
01221             *p++ = *t++; *p++ = *t++; n += 2;
01222         }
01223     } while ( m < ystop );
01224 }

```



```

01225 /*
01226         #] VECTORS :
01227         #[ INDICES :
01228 */
01229     else if ( *m == INDEX ) {
01230 /*
01231         This needs only to say that there is a match, after matching
01232         a 'wildcard'. This has to be prepared in TestMatch. The C->rhs
01233         should provide the replacement inside the prototype!
01234         Next question: id,p=q/2+r/2
01235 */
01236         while ( *t != INDEX ) { t += t[1]; if ( t >= tstop ) return(0); }
01237         xstop = t + t[1];
01238         ystop = m + m[1];
01239         t += 2;
01240         m += 2;
01241         n = 0;
01242         p = older;
01243         do {
01244             if ( *m == *t && t < xstop && m < ystop ) {
01245                 t++; m++;
01246             }
01247             else if ( ( *m >= (AM.OffsetIndex+WILDOFFSET) )
01248                 && ( *m < (AM.OffsetIndex+2*WILDOFFSET) ) ) {
01249                 while ( t < xstop ) {
01250                     *p++ = *t++; n++;
01251                 }
01252                 if ( !n ) return(0);
01253                 nq = n;
01254                 q = older;
01255                 do {
01256                     if ( !CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,*q,&newvall) ) {
01257                         AddWild(BHEAD *m-WILDOFFSET,INDTOIND,newvall);
01258                         break;
01259                     }
01260                     q++;
01261                     nq--;
01262                 } while ( nq > 0 );
01263                 if ( nq <= 0 ) return (0);
01264                 n--;
01265                 nq--;
01266                 p = q + 1;
01267                 while ( nq > 0 ) { *q++ = *p++; nq--; }
01268                 p--;
01269                 m++;
01270             }
01271             else if ( ( *m >= (AM.OffsetVector+WILDOFFSET) )
01272                 && ( *m < (AM.OffsetVector+2*WILDOFFSET) ) ) {
01273                 while ( t < xstop ) {
01274                     *p++ = *t++; n++;
01275                 }
01276                 if ( !n ) return(0);
01277                 nq = n;
01278                 q = older;
01279                 do {
01280                     if ( !CheckWild(BHEAD *m-WILDOFFSET,VECTOVEC,*q,&newvall) ) {
01281                         AddWild(BHEAD *m-WILDOFFSET,VECTOVEC,newvall);
01282                         break;
01283                     }
01284                     q++;
01285                     nq--;
01286                 } while ( nq > 0 );
01287                 if ( nq <= 0 ) return (0);
01288                 n--;
01289                 nq--;
01290                 p = q + 1;
01291                 while ( nq > 0 ) { *q++ = *p++; nq--; }
01292                 p--;
01293                 m++;
01294             }
01295             else {
01296                 if ( t >= xstop ) return(0);
01297                 *p++ = *t++; n++;
01298             }
01299         } while ( m < ystop );
01300
01301 /*
01302         return(0);
01303 */
01304     }
01305 /*
01306         #] INDICES :
01307         #[ DELTAS :
01308 */
01309     else if ( *m == DELTA ) {
01310         while ( *t != DELTA ) { t += t[1]; if ( t >= tstop ) return(0); }
01311         xstop = t + t[1];

```

```

01312     ystop = m + m[1];
01313     t += 2;
01314     m += 2;
01315     n = 0;
01316     p = older;
01317     do {
01318         if ( *t == *m && t[1] == m[1] && t < xstop ) {
01319             m += 2;
01320             t += 2;
01321         }
01322         else if ( ( *m >= (AM.OffsetIndex+WILDOFFSET) )
01323             && ( *m < (AM.OffsetIndex+2*WILDOFFSET) )
01324             && ( m[1] >= (AM.OffsetIndex+WILDOFFSET) )
01325             && ( m[1] < (AM.OffsetIndex+2*WILDOFFSET) ) ) { /* Two dummies */
01326             while ( t < xstop ) {
01327                 *p++ = *t++; *p++ = *t++; n += 2;
01328             }
01329             if ( !n ) return(0);
01330             nq = n;
01331             q = older;
01332             do {
01333                 if ( !CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,*q,&newval1) &&
01334                     !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,q[1],&newval2) ) {
01335                     AddWild(BHEAD *m-WILDOFFSET,INDTOIND,newval1);
01336                     AddWild(BHEAD m[1]-WILDOFFSET,INDTOIND,newval2);
01337                     break;
01338                 }
01339                 if ( !CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,q[1],&newval1) &&
01340                     !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,*q,&newval2) ) {
01341                     AddWild(BHEAD *m-WILDOFFSET,INDTOIND,newval1);
01342                     AddWild(BHEAD m[1]-WILDOFFSET,INDTOIND,newval2);
01343                     break;
01344                 }
01345                 q += 2;
01346                 nq -= 2;
01347             } while ( nq > 0 );
01348             if ( nq <= 0 ) return(0);
01349             n -= 2;
01350             nq -= 2;
01351             p = q + 2;
01352             while ( nq > 0 ) { *q++ = *p++; nq--; }
01353             p -= 2;
01354             m += 2;
01355         }
01356         else if ( ( m[1] >= (AM.OffsetIndex+WILDOFFSET) )
01357             && ( m[1] < (AM.OffsetIndex+2*WILDOFFSET) ) ) {
01358             wild = m[1]; regular = *m;
01359 OneWild:
01360             while ( ( regular == *t || regular == t[1] ) && t < xstop ) {
01361                 *p++ = *t++; *p++ = *t++; n += 2;
01362             }
01363             if ( !n ) return(0);
01364             nq = n;
01365             q = older;
01366             do {
01367                 if ( regular == *q && !CheckWild(BHEAD wild-WILDOFFSET,INDTOIND,q[1],&newval1)
01368                     AddWild(BHEAD wild-WILDOFFSET,INDTOIND,newval1);
01369                     break;
01370                 }
01371                 if ( regular == q[1] && !CheckWild(BHEAD wild-WILDOFFSET,INDTOIND,*q,&newval1)
01372                     AddWild(BHEAD wild-WILDOFFSET,INDTOIND,newval1);
01373                     break;
01374                 }
01375                 q += 2;
01376                 nq -= 2;
01377             } while ( nq > 0 );
01378             if ( nq <= 0 ) return(0);
01379             n -= 2;
01380             nq -= 2;
01381             p = q + 2;
01382             while ( nq > 0 ) { *q++ = *p++; nq--; }
01383             p -= 2;
01384             m += 2;
01385         }
01386         else if ( ( *m >= (AM.OffsetIndex+WILDOFFSET) )
01387             && ( *m < (AM.OffsetIndex+2*WILDOFFSET) ) ) {
01388             wild = *m; regular = m[1];
01389             goto OneWild;
01390         }
01391         else {
01392             if ( t >= tstop || *m < *t || ( *m == *t && m[1] < t[1] ) )
01393                 return(0);
01394             *p++ = *t++; *p++ = *t++; n += 2;
01395         }
01396     } while ( m < ystop );

```

```

01397     }
01398     /*
01399         #] DELTAS :
01400     */
01401     else {
01402         MLOCK(ErrorMessageLock);
01403         MesPrint("Pattern not yet implemented");
01404         MUNLOCK(ErrorMessageLock);
01405         Terminate(-1);
01406     }
01407     } while ( m < mstop );
01408     return(1);
01409     }
01410     else return(-1);
01411 }
01412
01413 /*
01414     #] FindRest :
01415     #] Patterns :
01416 */

```


4.39 flintinterface.cc File Reference

```

#include "form3.h"
#include "flintinterface.h"

```

Include dependency graph for flintinterface.cc:

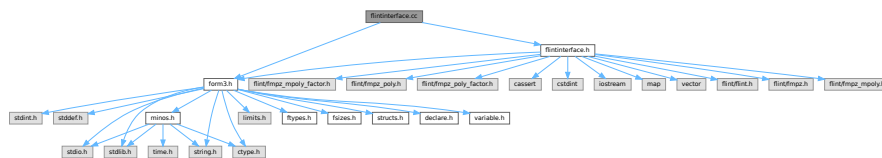

Macros

- `#define UNIVARIATE_DENSITY_THR 0.02f`
- `#define IFW(x) { if ( write ) {x;} }`

4.39.1 Detailed Description

Contains functions which interface with FLINT functions to perform arithmetic with uni- and multi-variate polynomials and perform factorization.

Definition in file [flintinterface.cc](#).

4.39.2 Macro Definition Documentation

4.39.2.1 UNIVARIATE_DENSITY_THR

```
#define UNIVARIATE_DENSITY_THR 0.02f
```

Definition at line 71 of file [flintinterface.cc](#).

4.39.2.2 IFW

```
#define IFW(
    x ) { if ( write ) {x;} }
```

Definition at line 1779 of file [flintinterface.cc](#).

4.40 flintinterface.cc

[Go to the documentation of this file.](#)

```
00001
00006 /* #[ License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[ License : */
00032
00033 #ifdef HAVE_CONFIG_H
00034 #ifndef CONFIG_H_INCLUDED
00035 #define CONFIG_H_INCLUDED
00036 #include <config.h>
00037 #endif
00038 #endif
00039
00040 extern "C" {
00041 #include "form3.h"
00042 }
00043
00044 #include "flintinterface.h"
00045
00046 /*
00047 * #[ Types
00048 * Use fixed-size integer types (int32_t, uint32_t, int64_t, uint64_t) except when we refer
00049 * specifically to FORM term data, when we use WORD. This code has only been tested on 64bit
00050 * systems where WORDs are int32_t, and some functions (fmpz_get_form, fmpz_set_form) require this
00051 * to be the case. Enforce this:
00052 */
00053 static_assert(sizeof(WORD) == sizeof(int32_t), "flint interface expects 32bit WORD");
00054 static_assert(sizeof(WORD) == sizeof(uint32_t), "flint interface expects 32bit WORD");
00055 static_assert(BITSINWORD == 32, "flint interface expects 32bit WORD");
00056 static_assert(sizeof(ulong) == sizeof(uint64_t), "flint interface expects ulong is uint64_t");
00057 static_assert(sizeof(slong) == sizeof(int64_t), "flint interface expects slong is int64_t");
00058
00059 /*
00060 * Flint functions take arguments or return values which may be "slong" or "ulong" in its
00061 * documentation, and these are int64_t and uint64_t respectively.
00062 *
00063 * #[ Types
00064 */
00065
00066 /*
00067 * FLINT's univariate poly has a dense representation. For sufficiently sparse polynomials it is
00068 * faster to use mpoly instead, which is sparse. For a density <= this threshold we switch, where
00069 * the density defined as is "number of terms" / "maximum degree".
00070 */
00071 #define UNIVARIATE_DENSITY_THR 0.02f
00072
```

```

00073  /*
00074  #] flint::cleanup :
00075  */
00076  void flint::cleanup(void) {
00077      flint_cleanup();
00078  }
00079  /*
00080  #] flint::cleanup :
00081  #] flint::cleanup_master :
00082  */
00083  void flint::cleanup_master(void) {
00084      flint_cleanup_master();
00085  }
00086  /*
00087  #] flint::cleanup_master :
00088  #] flint::divmod_mpoly :
00089  */
00090  WORD* flint::divmod_mpoly(PHEAD const WORD *a, const WORD *b, const bool return_rem,
00091      const WORD must_fit_term, const var_map_t &var_map) {
00092
00093      flint::mpoly_ctx ctx(var_map.size());
00094      flint::mpoly pa(ctx.d), pb(ctx.d), denpa(ctx.d), denpb(ctx.d);
00095
00096      flint::from_argument_mpoly(pa.d, denpa.d, a, false, var_map, ctx.d);
00097      flint::from_argument_mpoly(pb.d, denpb.d, b, false, var_map, ctx.d);
00098
00099      // The input won't have any symbols with negative powers, but there may be rational
00100      // coefficients. Verify this:
00101      if ( fmpz_mpoly_is_fmpz(denpa.d, ctx.d) != 1 ) {
00102          MLOCK(ErrorMessageLock);
00103          MesPrint("flint::divmod_mpoly: error: denpa is non-constant");
00104          MUNLOCK(ErrorMessageLock);
00105          Terminate(-1);
00106      }
00107      if ( fmpz_mpoly_is_fmpz(denpb.d, ctx.d) != 1 ) {
00108          MLOCK(ErrorMessageLock);
00109          MesPrint("flint::divmod_mpoly: error: denpb is non-constant");
00110          MUNLOCK(ErrorMessageLock);
00111          Terminate(-1);
00112      }
00113
00114      flint::fmpz scale;
00115      flint::mpoly div(ctx.d), rem(ctx.d);
00116
00117      fmpz_mpoly_quasidivrem(scale.d, div.d, rem.d, pa.d, pb.d, ctx.d);
00118
00119      // The quotient must be multiplied by the denominator of the divisor
00120      fmpz_mpoly_mul(div.d, div.d, denpb.d, ctx.d);
00121
00122      // The overall denominator of both div and rem is given by scale*denpa. This we will pass to
00123      // to_argument_mpoly's "denscale" argument which performs the division in the result. We have
00124      // already checked denpa is just an fmpz.
00125      fmpz_mul(scale.d, scale.d, fmpz_mpoly_term_coeff_ref(denpa.d, 0, ctx.d));
00126
00127      // Determine the size of the output by passing write = false.
00128      const bool with_arghead = false;
00129      bool write = false;
00130      const uint64_t prev_size = 0;
00131      const uint64_t out_size = return_rem ?
00132          (uint64_t)flint::to_argument_mpoly(BHEAD NULL, with_arghead, must_fit_term, write, prev_size,
00133              rem.d, var_map, ctx.d, scale.d)
00134          :
00135          (uint64_t)flint::to_argument_mpoly(BHEAD NULL, with_arghead, must_fit_term, write, prev_size,
00136              div.d, var_map, ctx.d, scale.d)
00137          ;
00138      WORD* res = (WORD *)Malloca1(sizeof(WORD)*out_size, "flint::divrem_mpoly");
00139
00140      // Write out the result
00141      write = true;
00142      if ( return_rem ) {
00143          (uint64_t)flint::to_argument_mpoly(BHEAD res, with_arghead, must_fit_term, write, prev_size,
00144              rem.d, var_map, ctx.d, scale.d);
00145      }
00146      else {
00147          (uint64_t)flint::to_argument_mpoly(BHEAD res, with_arghead, must_fit_term, write, prev_size,
00148              div.d, var_map, ctx.d, scale.d);
00149      }
00150
00151      return res;
00152  }
00153  /*
00154  #] flint::divmod_mpoly :
00155  #] flint::divmod_poly :

```

```

00160 */
00161 WORD* flint::divmod_poly(PHEAD const WORD *a, const WORD *b, const bool return_rem,
00162     const WORD must_fit_term, const var_map_t &var_map) {
00163
00164     flint::poly pa, pb, denpa, denpb;
00165
00166     flint::from_argument_poly(pa.d, denpa.d, a, false);
00167     flint::from_argument_poly(pb.d, denpb.d, b, false);
00168
00169     // The input won't have any symbols with negative powers, but there may be rational
00170     // coefficients. Verify this:
00171     if ( fmpz_poly_length(denpa.d) != 1 ) {
00172         MLOCK(ErrorMessageLock);
00173         MesPrint("flint::divmod_poly: error: denpa is non-constant");
00174         MUNLOCK(ErrorMessageLock);
00175         Terminate(-1);
00176     }
00177     if ( fmpz_poly_length(denpb.d) != 1 ) {
00178         MLOCK(ErrorMessageLock);
00179         MesPrint("flint::divmod_poly: error: denpb is non-constant");
00180         MUNLOCK(ErrorMessageLock);
00181         Terminate(-1);
00182     }
00183
00184     flint::fmpz scale;
00185     uint64_t scale_power = 0;
00186     flint::poly div, rem;
00187
00188     // Get the leading coefficient of pb. fmpz_poly_pseudo_divrem returns only the scaling power.
00189     fmpz_poly_get_coeff_fmpz(scale.d, pb.d, fmpz_poly_degree(pb.d));
00190
00191     fmpz_poly_pseudo_divrem(div.d, rem.d, (ulong*)&scale_power, pa.d, pb.d);
00192
00193     // The quotient must be multiplied by the denominator of the divisor
00194     fmpz_poly_mul(div.d, div.d, denpb.d);
00195
00196     // The overall denominator of both div and rem is given by scale^scale_power*denpa. This we will
00197     // pass to to_argument_poly's "denscale" argument which performs the division in the result. We
00198     // have already checked denpa is just an fmpz.
00199     fmpz_pow_ui(scale.d, scale.d, scale_power);
00200     fmpz_mul(scale.d, scale.d, fmpz_poly_get_coeff_ptr(denpa.d, 0));
00201
00202
00203     // Determine the size of the output by passing write = false.
00204     const bool with_arghead = false;
00205     bool write = false;
00206     const uint64_t prev_size = 0;
00207     const uint64_t out_size = return_rem ?
00208         (uint64_t)flint::to_argument_poly(BHEAD NULL, with_arghead, must_fit_term, write, prev_size,
00209             rem.d, var_map, scale.d)
00210         :
00211         (uint64_t)flint::to_argument_poly(BHEAD NULL, with_arghead, must_fit_term, write, prev_size,
00212             div.d, var_map, scale.d)
00213         ;
00214     WORD* res = (WORD *)Malloca(sizeof(WORD)*out_size, "flint::divrem_poly");
00215
00216
00217     // Write out the result
00218     write = true;
00219     if ( return_rem ) {
00220         (uint64_t)flint::to_argument_poly(BHEAD res, with_arghead, must_fit_term, write, prev_size,
00221             rem.d, var_map, scale.d);
00222     }
00223     else {
00224         (uint64_t)flint::to_argument_poly(BHEAD res, with_arghead, must_fit_term, write, prev_size,
00225             div.d, var_map, scale.d);
00226     }
00227
00228     return res;
00229 }
00230 /*
00231 #] flint::divmod_poly :
00232
00233 #[ flint::factorize_mpoly :
00234 */
00235 WORD* flint::factorize_mpoly(PHEAD const WORD *argin, WORD *argout, const bool with_arghead,
00236     const bool is_fun_arg, const var_map_t &var_map) {
00237
00238     flint::mpoly_ctx ctx(var_map.size());
00239     flint::mpoly arg(ctx.d), den(ctx.d), base(ctx.d);
00240
00241     flint::from_argument_mpoly(arg.d, den.d, argin, with_arghead, var_map, ctx.d);
00242     // The denominator must be 1:
00243     if ( fmpz_mpoly_is_one(den.d, ctx.d) != 1 ) {
00244         MLOCK(ErrorMessageLock);
00245         MesPrint("flint::factorize_mpoly error: den != 1");
00246         MUNLOCK(ErrorMessageLock);

```

```

00247     Terminate(-1);
00248 }
00249
00250
00251 // Now we can factor the mpoly:
00252 flint::mpoly_factor arg_fac(ctx.d);
00253 fmpz_mpoly_factor(arg_fac.d, arg.d, ctx.d);
00254 const int64_t num_factors = fmpz_mpoly_factor_length(arg_fac.d, ctx.d);
00255
00256 flint::fmpz overall_constant;
00257 fmpz_mpoly_factor_get_constant_fmpz(overall_constant.d, arg_fac.d, ctx.d);
00258 // FORM should always have taken the overall constant out in the content. Thus this overall
00259 // constant factor should be +- 1 here. Verify this:
00260 if ( ! ( fmpz_equal_si(overall_constant.d, 1) || fmpz_equal_si(overall_constant.d, -1) ) ) {
00261     MLOCK(ErrorMessageLock);
00262     MesPrint("flint::factorize_mpoly error: overall constant factor != +-1");
00263     MUNLOCK(ErrorMessageLock);
00264     Terminate(-1);
00265 }
00266
00267 // Construct the output. If argout is not NULL, we write the result there.
00268 // Otherwise, allocate memory.
00269 // The output is zero-terminated list of factors. If with_arghead, each has an arghead which
00270 // contains its size. Otherwise, the factors are zero separated.
00271
00272 // We only need to determine the size of the output if we are allocating memory, but we need to
00273 // loop through the factors to fix their signs anyway. Do both together in one loop:
00274
00275 // Initially 1, for the final trailing 0.
00276 uint64_t output_size = 1;
00277
00278 // For finding the highest symbol, in FORM's lexicographic ordering
00279 var_map_t var_map_inv;
00280 for ( auto x: var_map ) {
00281     var_map_inv[x.second] = x.first;
00282 }
00283
00284 // Store whether we should flip the factor sign in the output:
00285 vector<int32_t> base_sign(num_factors, 0);
00286
00287 for ( int64_t i = 0; i < num_factors; i++ ) {
00288     fmpz_mpoly_factor_get_base(base.d, arg_fac.d, i, ctx.d);
00289     const int64_t exponent = fmpz_mpoly_factor_get_exp_si(arg_fac.d, i, ctx.d);
00290
00291     // poly_factorize makes sure the highest power of the "highest symbol" (in FORM's
00292     // lexicographic ordering) has a positive coefficient. Check this, update overall_constant
00293     // of the factorization if necessary.
00294     // Store the sign per factor, so that we can flip the signs in the output without re-checking
00295     // the individual terms again.
00296     uint32_t max_var = 0; // FORM symbols start at 20, 0 is a good initial value.
00297     int32_t max_pow = -1;
00298     vector<int64_t> base_term_exponents(var_map.size(), 0);
00299
00300     for ( int64_t j = 0; j < fmpz_mpoly_length(base.d, ctx.d); j++ ) {
00301         fmpz_mpoly_get_term_exp_si((slong*)base_term_exponents.data(), base.d, (slong)j, ctx.d);
00302
00303         for ( size_t k = 0; k < var_map.size(); k++ ) {
00304             if ( base_term_exponents[k] > 0 && ( var_map_inv.at(k) > max_var ||
00305                 ( var_map_inv.at(k) == max_var && base_term_exponents[k] > max_pow ) ) ) {
00306
00307                 max_var = var_map_inv.at(k);
00308                 max_pow = base_term_exponents[k];
00309                 base_sign[i] = fmpz_sgn(fmpz_mpoly_term_coeff_ref(base.d, j, ctx.d));
00310             }
00311         }
00312     }
00313     // If this base's sign will be flipped an odd number of times, there is a contribution to
00314     // the overall sign of the whole factorization:
00315     if ( ( base_sign[i] == -1 ) && ( exponent % 2 == 1 ) ) {
00316         fmpz_neg(overall_constant.d, overall_constant.d);
00317     }
00318
00319     // Now determine the output size of the factor, if we are allocating the memory
00320     if ( argout == NULL ) {
00321         const bool write = false;
00322         for ( int64_t j = 0; j < exponent; j++ ) {
00323             output_size += (uint64_t)flint::to_argument_mpoly(BHEAD NULL, with_arghead,
00324                 is_fun_arg, write, 0, base.d, var_map, ctx.d);
00325         }
00326     }
00327 }
00328 if ( fmpz_sgn(overall_constant.d) == -1 && argout == NULL ) {
00329     // Add space for a fast-notation number or a normal-notation number and zero separator
00330     output_size += with_arghead ? 2 : 4+1;
00331 }
00332
00333 // Now make the allocation if necessary:

```

```

00334     if ( argout == NULL ) {
00335         argout = (WORD*)Malloca1(sizeof(WORD)*output_size, "flint::factorize_mpoly");
00336     }
00337
00338
00339     // And now comes the actual output:
00340     WORD* old_argout = argout;
00341
00342     // If the overall sign is negative, first write a full-notation -1. It will be absorbed into the
00343     // overall factor in the content by the caller.
00344     if ( fmpz_sgn(overall_constant.d) == -1 ) {
00345         if ( with_arghead ) {
00346             // poly writes in fast notation in this case. Fast notation is expected by the caller, to
00347             // properly merge it with the overall factor of the content.
00348             *argout++ = -SNUMBER;
00349             *argout++ = -1;
00350         }
00351         else {
00352             *argout++ = 4; // term size
00353             *argout++ = 1; // numerator
00354             *argout++ = 1; // denominator
00355             *argout++ = -3; // coeff size, negative number
00356             *argout++ = 0; // factor separator
00357         }
00358     }
00359
00360     for ( int64_t i = 0; i < num_factors; i++ ) {
00361         fmpz_mpoly_factor_get_base(base.d, arg_fac.d, i, ctx.d);
00362         const int64_t exponent = fmpz_mpoly_factor_get_exp_si(arg_fac.d, i, ctx.d);
00363
00364         if ( base_sign[i] == -1 ) {
00365             fmpz_mpoly_neg(base.d, base.d, ctx.d);
00366         }
00367
00368         const bool write = true;
00369         for ( int64_t j = 0; j < exponent; j++ ) {
00370             argout += flint::to_argument_mpoly(BHEAD argout, with_arghead, is_fun_arg, write,
00371                 argout-old_argout, base.d, var_map, ctx.d);
00372         }
00373     }
00374     // Final trailing zero to denote the end of the factors.
00375     *argout++ = 0;
00376
00377     return old_argout;
00378 }
00379 /*
00380 #] flint::factorize_mpoly :
00381 #[ flint::factorize_poly :
00382 */
00383 WORD* flint::factorize_poly(PHEAD const WORD *argin, WORD *argout, const bool with_arghead,
00384     const bool is_fun_arg, const var_map_t &var_map) {
00385
00386     flint::poly arg, den;
00387
00388     flint::from_argument_poly(arg.d, den.d, argin, with_arghead);
00389     // The denominator must be 1:
00390     if ( fmpz_poly_is_one(den.d) != 1 ) {
00391         MLOCK(ErrorMessageLock);
00392         MesPrint("flint::factorize_poly error: den != 1");
00393         MUNLOCK(ErrorMessageLock);
00394         Terminate(-1);
00395     }
00396
00397
00398     // Now we can factor the poly:
00399     flint::poly_factor arg_fac;
00400     fmpz_poly_factor(arg_fac.d, arg.d);
00401     // fmpz_poly_factor_t lacks some convenience functions which fmpz_mpoly_factor_t has.
00402     // I have worked out how to get the factors by looking at how fmpz_poly_factor_print works.
00403     const long num_factors = (arg_fac.d)->num;
00404
00405
00406     // Construct the output. If argout is not NULL, we write the result there.
00407     // Otherwise, allocate memory.
00408     // The output is zero-terminated list of factors. If with_arghead, each has an arghead which
00409     // contains its size. Otherwise, the factors are zero separated.
00410     if ( argout == NULL ) {
00411         // First we need to determine the size of the output. This is the same procedure as the
00412         // loop below, but we don't write anything in to_argument_poly (write arg: false).
00413         // Initially 1, for the final trailing 0.
00414         uint64_t output_size = 1;
00415
00416         for ( long i = 0; i < num_factors; i++ ) {
00417             fmpz_poly_struct* base = (arg_fac.d)->p + i;
00418
00419             const long exponent = (arg_fac.d)->exp[i];
00420

```



```

00421         const bool write = false;
00422         for ( long j = 0; j < exponent; j++ ) {
00423             output_size += (uint64_t)flint::to_argument_poly(BHEAD NULL, with_arghead,
00424                 is_fun_arg, write, 0, base, var_map);
00425         }
00426     }
00427
00428     argout = (WORD*)Malloca(sizeof(WORD)*output_size, "flint::factorize_poly");
00429 }
00430
00431 WORD* old_argout = argout;
00432
00433 for ( long i = 0; i < num_factors; i++ ) {
00434     fmpz_poly_struct* base = (arg_fac.d)->p + i;
00435
00436     const long exponent = (arg_fac.d)->exp[i];
00437
00438     const bool write = true;
00439     for ( long j = 0; j < exponent; j++ ) {
00440         argout += flint::to_argument_poly(BHEAD argout, with_arghead, is_fun_arg, write,
00441             argout-old_argout, base, var_map);
00442     }
00443 }
00444 *argout = 0;
00445
00446 return old_argout;
00447 }
00448 /*
00449 #] flint::factorize_poly :
00450
00451 #[ flint::form_sort :
00452 */
00453 // Sort terms using form's sorting routines. Uses a custom (faster) compare routine, since here
00454 // only symbols can appear.
00455 // This is a modified poly_sort from polywrap.cc.
00456 void flint::form_sort(PHEAD WORD *terms) {
00457     if ( terms[0] < 0 ) {
00458         // Fast notation, there is nothing to do
00459         return;
00460     }
00461 }
00462
00463 const WORD oldsorttype = AR.SortType;
00464 AR.SortType = SORTHIGHFIRST;
00465
00466 const WORD in_size = terms[0] - ARGHEAD;
00467 WORD out_size;
00468
00469 if ( NewSort(BHEAD0) ) {
00470     Terminate(-1);
00471 }
00472 AR.CompareRoutine = (COMPAREDUMMY)(&CompareSymbols);
00473
00474 // Make sure the symbols are in the right order within the terms
00475 for ( WORD i = ARGHEAD; i < terms[0]; i += terms[i] ) {
00476     if ( SymbolNormalize(terms+i) < 0 || StoreTerm(BHEAD terms+i) ) {
00477         AR.SortType = oldsorttype;
00478         AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
00479         LowerSortLevel();
00480         Terminate(-1);
00481     }
00482 }
00483
00484 if ( ( out_size = EndSort(BHEAD terms+ARGHEAD, 1) ) < 0 ) {
00485     AR.SortType = oldsorttype;
00486     AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
00487     Terminate(-1);
00488 }
00489
00490 // Check the final size
00491 if ( in_size != out_size ) {
00492     MLOCK(ErrorMessageLock);
00493     MesPrint("flint::form_sort: error: unexpected sorted arg length change %d->%d", in_size,
00494         out_size);
00495     MUNLOCK(ErrorMessageLock);
00496     Terminate(-1);
00497 }
00498
00499 AR.SortType = oldsorttype;
00500 AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
00501 terms[1] = 0; // set dirty flag to zero
00502 }
00503 /*
00504 #] flint::form_sort :
00505
00506 #[ flint::from_argument_mpoly :
00507 */

```

```

00508 // Convert a FORM argument (or 0-terminated list of terms: with_arghead == false) to a
00509 // (multi-variate) fmpz_mpoly_t poly. The "denominator" is return in denpoly, and contains the
00510 // overall negative-power numeric and symbolic factor.
00511 uint64_t flint::from_argument_mpoly(fmpz_mpoly_t poly, fmpz_mpoly_t denpoly, const WORD *args,
00512     const bool with_arghead, const var_map_t &var_map, const fmpz_mpoly_ctx_t ctx) {
00513
00514     // Some callers re-use their poly, denpoly to avoid calling init/clear unnecessarily.
00515     // Make sure they are 0 to begin.
00516     fmpz_mpoly_set_si(poly, 0, ctx);
00517     fmpz_mpoly_set_si(denpoly, 0, ctx);
00518
00519     // First check for "fast notation" arguments:
00520     if ( *args == -SNUMBER ) {
00521         fmpz_mpoly_set_si(poly, *(args+1), ctx);
00522         fmpz_mpoly_set_si(denpoly, 1, ctx);
00523         return 2;
00524     }
00525
00526     if ( *args == -SYMBOL ) {
00527         // A "fast notation" SYMBOL has a power and coefficient of 1:
00528         vector<uint64_t> exponents(var_map.size(), 0);
00529         exponents[var_map.at(*(args+1))] = 1;
00530
00531         fmpz_mpoly_set_coeff_ui_ui(poly, (ulong)1, (ulong*)exponents.data(), ctx);
00532         fmpz_mpoly_set_ui(denpoly, (ulong)1, ctx);
00533         return 2;
00534     }
00535
00536     // Now we can iterate through the terms of the argument. If we have
00537     // an ARGHEAD, we already know where to terminate. Otherwise we'll have
00538     // to loop until the terminating 0.
00539     const WORD* arg_stop = with_arghead ? args+args[0] : (WORD*)UINT64_MAX;
00540     uint64_t arg_size = 0;
00541     if ( with_arghead ) {
00542         arg_size = args[0];
00543         args += ARGHEAD;
00544     }
00545
00546     // Search for numerical or symbol denominators to create "denpoly".
00547     flint::fmpz den_coeff, tmp;
00548     fmpz_set_si(den_coeff, 1);
00549     vector<uint64_t> neg_exponents(var_map.size(), 0);
00550
00551     for ( const WORD* term = args; term < arg_stop; term += term[0] ) {
00552         const WORD* term_stop = term+term[0];
00553         const WORD coeff_size = (term_stop)[-1];
00554         const WORD* symbol_stop = term_stop - ABS(coeff_size);
00555         const WORD* t = term;
00556
00557         t++;
00558         if ( t == symbol_stop ) {
00559             // Just a number, no symbols
00560         }
00561         else {
00562             t++; // this entry is SYMBOL
00563             t++; // this entry just has the size of the symbol array, but we can use symbol_stop
00564
00565             for ( const WORD* s = t; s < symbol_stop; s += 2 ) {
00566                 if ( *(s+1) < 0 ) {
00567                     neg_exponents[var_map.at(*s)] =
00568                         MaX(neg_exponents[var_map.at(*s)], (uint64_t)(-(*(s+1))) );
00569                 }
00570             }
00571         }
00572     }
00573
00574     // Now check for a denominator in the coefficient:
00575     if ( *(symbol_stop+ABS(coeff_size/2)) != 1 ) {
00576         flint::fmpz_set_form(tmp.d, (UWORD*)(symbol_stop+ABS(coeff_size/2)), ABS(coeff_size/2));
00577         // Record the LCM of the coefficient denominators:
00578         fmpz_lcm(den_coeff.d, den_coeff.d, tmp.d);
00579     }
00580
00581     if ( !with_arghead && *term_stop == 0 ) {
00582         // + 1 for the terminating 0
00583         arg_size = term_stop - args + 1;
00584         break;
00585     }
00586
00587     // Assemble denpoly.
00588     fmpz_mpoly_set_coeff_fmpz_ui(denpoly, den_coeff.d, (ulong*)neg_exponents.data(), ctx);
00589
00590     // For the term coefficients
00591     flint::fmpz coeff;

```

```

00595
00596     for ( const WORD* term = args; term < arg_stop; term += term[0] ) {
00597         const WORD* term_stop = term+term[0];
00598         const WORD  coeff_size = (term_stop)[-1];
00599         const WORD* symbol_stop = term_stop - ABS(coeff_size);
00600         const WORD* t = term;
00601
00602         vector<uint64_t> exponents(var_map.size(), 0);
00603
00604         t++; // skip over the total size entry
00605         if ( t == symbol_stop ) {
00606             // Just a number, no symbols
00607         }
00608         else {
00609             t++; // this entry is SYMBOL
00610             t++; // this entry just has the size of the symbol array, but we can use symbol_stop
00611             for ( const WORD* s = t; s < symbol_stop; s += 2 ) {
00612                 exponents[var_map.at(*s)] = *(s+1);
00613             }
00614         }
00615         // Now read the coefficient
00616         flint::fmpz_set_form(coeff.d, (UWORD*)symbol_stop, coeff_size/2);
00617
00618         // Multiply by denominator LCM
00619         fmpz_mul(coeff.d, coeff.d, den_coeff.d);
00620
00621         // Shift by neg_exponents
00622         for ( size_t i = 0; i < var_map.size(); i++ ) {
00623             exponents[i] += neg_exponents[i];
00624         }
00625
00626         // Read the denominator if there is one, and divide it out of the coefficient
00627         if ( *(symbol_stop+ABS(coeff_size/2)) != 1 ) {
00628             flint::fmpz_set_form(tmp.d, (UWORD*)(symbol_stop+ABS(coeff_size/2)), ABS(coeff_size/2));
00629             // By construction, this is an exact division
00630             fmpz_divexact(coeff.d, coeff.d, tmp.d);
00631         }
00632
00633         // Push the term to the mpoly, remember to sort when finished! This is much faster than using
00634         // fmpz_mpoly_set_coeff_fmpz_ui when the terms arrive in the "wrong order".
00635         fmpz_mpoly_push_term_fmpz_ui(poly, coeff.d, (ulong*)exponents.data(), ctx);
00636
00637         if ( !with_arghead && *term_stop == 0 ) {
00638             break;
00639         }
00640
00641     }
00642     // And now sort the mpoly
00643     fmpz_mpoly_sort_terms(poly, ctx);
00644
00645     return arg_size;
00646 }
00647 /*
00648 #] flint::from_argument_mpoly :
00649 #[ flint::from_argument_poly :
00650 */
00651 // Convert a FORM argument (or 0-terminated list of terms: with_arghead == false) to a
00652 // (uni-variate) fmpz_poly_t poly. The "denominator" is return in denpoly, and contains the
00653 // overall negative-power numeric and symbolic factor.
00654 uint64_t flint::from_argument_poly(fmpz_poly_t poly, fmpz_poly_t denpoly, const WORD *args,
00655     const bool with_arghead) {
00656
00657     // Some callers re-use their poly, denpoly to avoid calling init/clear unnecessarily.
00658     // Make sure they are 0 to begin.
00659     fmpz_poly_set_si(poly, 0);
00660     fmpz_poly_set_si(denpoly, 0);
00661
00662     // First check for "fast notation" arguments:
00663     if ( *args == -SNUMBER ) {
00664         fmpz_poly_set_si(poly, *(args+1));
00665         fmpz_poly_set_si(denpoly, 1);
00666         return 2;
00667     }
00668
00669     if ( *args == -SYMBOL ) {
00670         // A "fast notation" SYMBOL has a power and coefficient of 1:
00671         fmpz_poly_set_coeff_si(poly, 1, 1);
00672         fmpz_poly_set_si(denpoly, 1);
00673         return 2;
00674     }
00675
00676     // Now we can iterate through the terms of the argument. If we have
00677     // an ARGHEAD, we already know where to terminate. Otherwise we'll have
00678     // to loop until the terminating 0.
00679     const WORD* arg_stop = with_arghead ? args+args[0] : (WORD*)UINT64_MAX;
00680     uint64_t arg_size = 0;
00681     if ( with_arghead ) {

```

```

00682     arg_size = args[0];
00683     args += ARGHEAD;
00684 }
00685
00686 // Search for numerical or symbol denominators to create "denpoly".
00687 flint::fmpz den_coeff, tmp;
00688 fmpz_set_si(den_coeff.d, 1);
00689 uint64_t neg_exponent = 0;
00690
00691 for ( const WORD* term = args; term < arg_stop; term += term[0] ) {
00692
00693     const WORD* term_stop = term+term[0];
00694     const WORD  coeff_size = (term_stop)[-1];
00695     const WORD* symbol_stop = term_stop - ABS(coeff_size);
00696     const WORD* t = term;
00697
00698     t++; // skip over the total size entry
00699     if ( t == symbol_stop ) {
00700         // Just a number, no symbols
00701     }
00702     else {
00703         t++; // this entry is SYMBOL
00704         t++; // this entry is the size of the symbol array
00705         t++; // this is the first (and only) symbol code
00706         if ( *t < 0 ) {
00707             neg_exponent = MaX(neg_exponent, (uint64_t)(-(*t)) );
00708         }
00709     }
00710
00711     // Now check for a denominator in the coefficient:
00712     if ( *(symbol_stop+ABS(coeff_size/2)) != 1 ) {
00713         flint::fmpz_set_form(tmp.d, (UWORD*)(symbol_stop+ABS(coeff_size/2)), ABS(coeff_size/2));
00714         // Record the LCM of the coefficient denominators:
00715         fmpz_lcm(den_coeff.d, den_coeff.d, tmp.d);
00716     }
00717
00718     if ( *term_stop == 0 ) {
00719         // + 1 for the terminating 0
00720         arg_size = term_stop - args + 1;
00721         break;
00722     }
00723 }
00724 // Assemble denpoly.
00725 fmpz_poly_set_coeff_fmpz(denpoly, neg_exponent, den_coeff.d);
00726
00727 // For the term coefficients
00728 flint::fmpz coeff;
00729
00730 for ( const WORD* term = args; term < arg_stop; term += term[0] ) {
00731
00732     const WORD* term_stop = term+term[0];
00733     const WORD  coeff_size = (term_stop)[-1];
00734     const WORD* symbol_stop = term_stop - ABS(coeff_size);
00735     const WORD* t = term;
00736
00737     uint64_t exponent = 0;
00738
00739     t++; // skip over the total size entry
00740     if ( t == symbol_stop ) {
00741         // Just a number, no symbols
00742     }
00743     else {
00744         t++; // this entry is SYMBOL
00745         t++; // this entry is the size of the symbol array
00746         t++; // this is the first (and only) symbol code
00747         exponent = *t++;
00748     }
00749
00750     // Now read the coefficient
00751     flint::fmpz_set_form(coeff.d, (UWORD*)symbol_stop, coeff_size/2);
00752
00753     // Multiply by denominator LCM
00754     fmpz_mul(coeff.d, coeff.d, den_coeff.d);
00755
00756     // Shift by neg_exponent
00757     exponent += neg_exponent;
00758
00759     // Read the denominator if there is one, and divide it out of the coefficient
00760     if ( *(symbol_stop+ABS(coeff_size/2)) != 1 ) {
00761         flint::fmpz_set_form(tmp.d, (UWORD*)(symbol_stop+ABS(coeff_size/2)), ABS(coeff_size/2));
00762         // By construction, this is an exact division
00763         fmpz_divexact(coeff.d, coeff.d, tmp.d);
00764     }
00765
00766     // Add the term to the poly
00767     fmpz_poly_set_coeff_fmpz(poly, exponent, coeff.d);

```

```

00769
00770         if ( *term_stop == 0 ) {
00771             break;
00772         }
00773     }
00774
00775     return arg_size;
00776 }
00777 /*
00778 #] flint::from_argument_poly :
00779
00780 #[ flint::fmpz_get_form :
00781 */
00782 // Write FORM's long integer representation of an fmpz at a, and put the number of WORDs at na.
00783 // na carries the sign of the integer.
00784 WORD flint::fmpz_get_form(fmpz_t z, WORD *a) {
00785
00786     WORD na = 0;
00787     const int32_t sgn = fmpz_sgn(z);
00788     if ( sgn == -1 ) {
00789         fmpz_neg(z, z);
00790     }
00791     const int64_t nlimbs = fmpz_size(z);
00792
00793     // This works but is UB?
00794     //fmpz_get_ui_array(reinterpret_cast<uint64_t*>(a), nlimbs, z);
00795
00796     // Use fixed-size functions to get limb data where possible. These probably cover most real
00797     // cases.
00798     if ( nlimbs == 1 ) {
00799         const uint64_t limb = fmpz_get_ui(z);
00800         a[0] = (WORD)(limb & 0xFFFFFFFF);
00801         na++;
00802         a[1] = (WORD)(limb >> BITSINWORD);
00803         if ( a[1] != 0 ) {
00804             na++;
00805         }
00806     }
00807     else if ( nlimbs == 2 ) {
00808         uint64_t limb_hi = 0, limb_lo = 0;
00809         fmpz_get_uiui((ulong*)&limb_hi, (ulong*)&limb_lo, z);
00810         a[0] = (WORD)(limb_lo & 0xFFFFFFFF);
00811         na++;
00812         a[1] = (WORD)(limb_lo >> BITSINWORD);
00813         na++;
00814         a[2] = (WORD)(limb_hi & 0xFFFFFFFF);
00815         na++;
00816         a[3] = (WORD)(limb_hi >> BITSINWORD);
00817         if ( a[3] != 0 ) {
00818             na++;
00819         }
00820     }
00821     else {
00822         vector<uint64_t> limb_data(nlimbs, 0);
00823         fmpz_get_ui_array((ulong*)limb_data.data(), (ulong)nlimbs, z);
00824         for ( long i = 0; i < nlimbs; i++ ) {
00825             a[2*i] = (WORD)(limb_data[i] & 0xFFFFFFFF);
00826             na++;
00827             a[2*i+1] = (WORD)(limb_data[i] >> BITSINWORD);
00828             if ( a[2*i+1] != 0 || i < (nlimbs-1) ) {
00829                 // The final limb might fit in a single 32bit WORD. Only
00830                 // increment na if the final WORD is non zero.
00831                 na++;
00832             }
00833         }
00834     }
00835
00836     // And now put the sign in the number of limbs
00837     if ( sgn == -1 ) {
00838         na = -na;
00839     }
00840
00841     return na;
00842 }
00843 /*
00844 #] flint::fmpz_get_form :
00845 #[ flint::fmpz_set_form :
00846 */
00847 // Create an fmpz directly from FORM's long integer representation. fmpz uses 64bit unsigned limbs,
00848 // but FORM uses 32bit UWORDS on 64bit architectures so we can't use fmpz_set_ui_array directly.
00849 void flint::fmpz_set_form(fmpz_t z, UWORD *a, WORD na) {
00850
00851     if ( na == 0 ) {
00852         fmpz_zero(z);
00853         return;
00854     }
00855

```

```

00856 // Negative na represents a negative number
00857 int32_t sgn = 1;
00858 if ( na < 0 ) {
00859     sgn = -1;
00860     na = -na;
00861 }
00862
00863 // Remove padding. FORM stores numerators and denominators with equal numbers of limbs but we
00864 // don't need to do this within the fmpz. It is not necessary to do this really, the fmpz
00865 // doesn't add zero limbs unnecessarily, but we might be able to avoid creating the limb_data
00866 // array below.
00867 while ( a[na-1] == 0 ) {
00868     na--;
00869 }
00870
00871 // If the number fits in fixed-size fmpz_set functions, we don't need to use additional memory
00872 // to convert to uint64_t. These probably cover most real cases.
00873 if ( na == 1 ) {
00874     fmpz_set_ui(z, (uint64_t)a[0]);
00875 }
00876 else if ( na == 2 ) {
00877     fmpz_set_ui(z, (((uint64_t)a[1])«BITSINWORD) + (uint64_t)a[0]);
00878 }
00879 else if ( na == 3 ) {
00880     fmpz_set_uiui(z, (uint64_t)a[2], (((uint64_t)a[1])«BITSINWORD) + (uint64_t)a[0]);
00881 }
00882 else if ( na == 4 ) {
00883     fmpz_set_uiui(z, (((uint64_t)a[3])«BITSINWORD) + (uint64_t)a[2],
00884                 (((uint64_t)a[1])«BITSINWORD) + (uint64_t)a[0]);
00885 }
00886 else {
00887     const int32_t nlimbs = (na+1)/2;
00888     vector<uint64_t> limb_data(nlimbs, 0);
00889     for ( int32_t i = 0; i < nlimbs; i++ ) {
00890         if ( 2*i+1 <= na-1 ) {
00891             limb_data[i] = (uint64_t)a[2*i] + (((uint64_t)a[2*i+1])«BITSINWORD);
00892         }
00893         else {
00894             limb_data[i] = (uint64_t)a[2*i];
00895         }
00896     }
00897     fmpz_set_ui_array(z, (ulong*)limb_data.data(), nlimbs);
00898 }
00899
00900 // Finally set the sign.
00901 if ( sgn == -1 ) {
00902     fmpz_neg(z, z);
00903 }
00904
00905 return;
00906 }
00907 /*
00908 #] flint::fmpz_set_form :
00909
00910 #[ flint::gcd_mpoly :
00911 */
00912 // Return a pointer to a buffer containing the GCD of the 0-terminated term lists at a and b.
00913 // If must_fit_term, this should be a TermMalloc buffer. Otherwise Malloc1 the buffer.
00914 // For multi-variate cases.
00915 WORD* flint::gcd_mpoly(PHEAD const WORD *a, const WORD *b, const WORD must_fit_term,
00916 const var_map_t &var_map) {
00917     flint::mpoly_ctx ctx(var_map.size());
00918     flint::mpoly pa(ctx.d), pb(ctx.d), denpa(ctx.d), denpb(ctx.d), gcd(ctx.d);
00919
00920     flint::from_argument_mpoly(pa.d, denpa.d, a, false, var_map, ctx.d);
00921     flint::from_argument_mpoly(pb.d, denpb.d, b, false, var_map, ctx.d);
00922
00923     // denpa, denpb must be 1:
00924     if ( fmpz_mpoly_is_one(denpa.d, ctx.d) != 1 ) {
00925         MLOCK(ErrorMessageLock);
00926         MesPrint("flint::gcd_mpoly: error: denpa != 1");
00927         MUNLOCK(ErrorMessageLock);
00928         Terminate(-1);
00929     }
00930     if ( fmpz_mpoly_is_one(denpb.d, ctx.d) != 1 ) {
00931         MLOCK(ErrorMessageLock);
00932         MesPrint("flint::gcd_mpoly: error: denpb != 1");
00933         MUNLOCK(ErrorMessageLock);
00934         Terminate(-1);
00935     }
00936
00937     // poly returns pa if pa == pb, regardless of the lcoeff sign
00938     if ( fmpz_mpoly_equal(pa.d, pb.d, ctx.d) ) {
00939         fmpz_mpoly_set(gcd.d, pa.d, ctx.d);
00940     }
00941     else {

```

```

00943     // We need some gymnastics to have the same sign conventions as the poly class. It takes the
00944     // integer or univar content out of a,b, with the convention that the content sign matches
00945     // the lcoeff sign. Since FORM has already taken out the content, we are left with +1. In
00946     // Flint, the content always has a positive sign so here we should find +1. Check this:
00947     flint::mpoly tmp(ctx.d);
00948     fmpz_mpoly_term_content(tmp.d, pa.d, ctx.d);
00949     if ( fmpz_mpoly_is_one(tmp.d, ctx.d) != 1 ) {
00950         MLOCK(ErrorMessageLock);
00951         MesPrint("flint::gcd_mpoly: error: content of 1st arg != 1");
00952         MUNLOCK(ErrorMessageLock);
00953         Terminate(-1);
00954     }
00955     fmpz_mpoly_term_content(tmp.d, pb.d, ctx.d);
00956     if ( fmpz_mpoly_is_one(tmp.d, ctx.d) != 1 ) {
00957         MLOCK(ErrorMessageLock);
00958         MesPrint("flint::gcd_mpoly: error: content of 2nd arg != 1");
00959         MUNLOCK(ErrorMessageLock);
00960         Terminate(-1);
00961     }
00962
00963     // The poly class now divides the content out of a,b so that they have a positive lcoeff.
00964     // Then it multiplies the final gcd (which is given a positive lcoeff also) by
00965     // gcd(cont a, cont b). There it has gcd(1,1) = gcd(-1,1) = gcd(1,-1) = 1, and
00966     // gcd(-1,-1) = -1 (because of the pa==pb early return). So: if both input polys have a
00967     // negative lcoeff, we will flip the sign in the final result.
00968     bool flip_sign = 0;
00969     if ( ( fmpz_sgn(fmpz_mpoly_term_coeff_ref(pa.d, 0, ctx.d)) == -1 ) &&
00970         ( fmpz_sgn(fmpz_mpoly_term_coeff_ref(pb.d, 0, ctx.d)) == -1 ) ) {
00971         flip_sign = 1;
00972     }
00973
00974     fmpz_mpoly_gcd(gcd.d, pa.d, pb.d, ctx.d);
00975     if ( flip_sign ) {
00976         fmpz_mpoly_neg(gcd.d, gcd.d, ctx.d);
00977     }
00978 }
00979
00980 // This is freed by the caller
00981 WORD *res;
00982 if ( must_fit_term ) {
00983     res = TermMalloc("flint::gcd_mpoly");
00984 }
00985 else {
00986     // Determine the size of the GCD by passing write = false.
00987     const bool with_arghead = false;
00988     const bool write = false;
00989     const uint64_t prev_size = 0;
00990     const uint64_t gcd_size = (uint64_t)flint::to_argument_mpoly(BHEAD NULL,
00991         with_arghead, must_fit_term, write, prev_size, gcd.d, var_map, ctx.d);
00992
00993     res = (WORD *)Malloca(sizeof(WORD)*gcd_size, "flint::gcd_mpoly");
00994 }
00995
00996 const bool with_arghead = false;
00997 const bool write = true;
00998 const uint64_t prev_size = 0;
00999 flint::to_argument_mpoly(BHEAD res, with_arghead, must_fit_term, write, prev_size, gcd.d,
1000     var_map, ctx.d);
10001
10002 return res;
10003 }
10004 /*
10005 #] flint::gcd_mpoly :
10006 #[ flint::gcd_poly :
10007 */
10008 // Return a pointer to a buffer containing the GCD of the 0-terminated term lists at a and b.
10009 // If must_fit_term, this should be a TermMalloc buffer. Otherwise Malloca the buffer.
10010 // For uni-variate cases.
10011 WORD* flint::gcd_poly(PHEAD const WORD *a, const WORD *b, const WORD must_fit_term,
10012     const var_map_t &var_map) {
10013
10014     flint::poly pa, pb, denpa, denpb, gcd;
10015
10016     flint::from_argument_poly(pa.d, denpa.d, a, false);
10017     flint::from_argument_poly(pb.d, denpb.d, b, false);
10018
10019     // denpa, denpb must be 1:
10020     if ( fmpz_poly_is_one(denpa.d) != 1 ) {
10021         MLOCK(ErrorMessageLock);
10022         MesPrint("flint::gcd_poly: error: denpa != 1");
10023         MUNLOCK(ErrorMessageLock);
10024         Terminate(-1);
10025     }
10026     if ( fmpz_poly_is_one(denpb.d) != 1 ) {
10027         MLOCK(ErrorMessageLock);
10028         MesPrint("flint::gcd_poly: error: denpb != 1");
10029         MUNLOCK(ErrorMessageLock);

```

```

01030         Terminate(-1);
01031     }
01032
01033     // poly returns pa if pa == pb, regardless of the lcoeff sign
01034     if ( fmpz_poly_equal(pa.d, pb.d) ) {
01035         fmpz_poly_set(gcd.d, pa.d);
01036     }
01037     else {
01038         // Here, we don't have to make any sign flips like the mpoly case, because poly's
01039         // integer_gcd(1,1) = integer_gcd(-1,1) = integer_gcd(1,-1) = integer_gcd(-1,-1) = +1.
01040         // Still, verify that the content is 1:
01041         flint::fmpz tmp;
01042         fmpz_poly_content(tmp.d, pa.d);
01043         if ( fmpz_is_one(tmp.d) != 1 ) {
01044             MLOCK(ErrorMessageLock);
01045             MesPrint("flint::gcd_poly: error: content of 1st arg != 1");
01046             MUNLOCK(ErrorMessageLock);
01047             Terminate(-1);
01048         }
01049         fmpz_poly_content(tmp.d, pb.d);
01050         if ( fmpz_is_one(tmp.d) != 1 ) {
01051             MLOCK(ErrorMessageLock);
01052             MesPrint("flint::gcd_poly: error: content of 2nd arg != 1");
01053             MUNLOCK(ErrorMessageLock);
01054             Terminate(-1);
01055         }
01056     }
01057     fmpz_poly_gcd(gcd.d, pa.d, pb.d);
01058 }
01059
01060 // This is freed by the caller
01061 WORD *res;
01062 if ( must_fit_term ) {
01063     res = TermMalloc("flint::gcd_poly");
01064 }
01065 else {
01066     // Determine the size of the GCD by passing write = false.
01067     const bool with_arghead = false;
01068     const bool write = false;
01069     const uint64_t prev_size = 0;
01070     const uint64_t gcd_size = (uint64_t)flint::to_argument_poly(BHEAD NULL,
01071         with_arghead, must_fit_term, write, prev_size, gcd.d, var_map);
01072
01073     res = (WORD *)Malloca(sizeof(WORD)*gcd_size, "flint::gcd_poly");
01074 }
01075
01076 const bool with_arghead = false;
01077 const uint64_t prev_size = 0;
01078 const bool write = true;
01079 flint::to_argument_poly(BHEAD res, with_arghead, must_fit_term, write, prev_size, gcd.d,
01080     var_map);
01081
01082 return res;
01083 }
01084 /*
01085 #] flint::gcd_poly :
01086
01087 #[ flint::get_variables :
01088 */
01089 // Get the list of symbols which appear in the vector of expressions. These are polyratfun
01090 // numerators, denominators or expressions from calls to gcd_ etc. Return this list as a map
01091 // between indices and symbol codes.
01092 // TODO FACTORSYMBOL last?
01093 flint::var_map_t flint::get_variables(const vector <WORD *> &es, const bool with_arghead,
01094     const bool sort_vars) {
01095
01096     int32_t num_vars = 0;
01097     // We count the total number of terms to determine "density".
01098     uint32_t num_terms = 0;
01099     // To be used if we sort by highest degree, as the poly code does.
01100     vector<int32_t> degrees;
01101     var_map_t var_map;
01102
01103     // extract all variables
01104     for ( size_t ei = 0; ei < es.size(); ei++ ) {
01105         WORD *e = es[ei];
01106
01107         // fast notation
01108         if ( *e == -SNUMBER ) {
01109             num_terms++;
01110         }
01111         else if ( *e == -SYMBOL ) {
01112             num_terms++;
01113             if ( !var_map.count(e[1]) ) {
01114                 var_map[e[1]] = num_vars++;
01115                 degrees.push_back(1);
01116             }
01117         }
01118     }

```



```

01117     }
01118     // JD: Here we need to check for non-symbol/number terms in fast notation.
01119     else if ( *e < 0 ) {
01120         MLOCK(ErrorMessageLock);
01121         MesPrint("ERROR: polynomials and polyratfuns must contain symbols only");
01122         MUNLOCK(ErrorMessageLock);
01123         Terminate(1);
01124     }
01125     else {
01126         for ( WORD i = with_arghead ? ARGHEAD:0; with_arghead ? i < e[0]:e[i] != 0; i += e[i] ) {
01127             num_terms++;
01128             if ( i+1 < i+e[i]-ABS(e[i+e[i]-1]) && e[i+1] != SYMBOL ) {
01129                 MLOCK(ErrorMessageLock);
01130                 MesPrint("ERROR: polynomials and polyratfuns must contain symbols only");
01131                 MUNLOCK(ErrorMessageLock);
01132                 Terminate(1);
01133             }
01134
01135             for ( WORD j = i+3; j<i+e[i]-ABS(e[i+e[i]-1]); j += 2 ) {
01136                 if ( !var_map.count(e[j]) ) {
01137                     var_map[e[j]] = num_vars++;
01138                     degrees.push_back(e[j+1]);
01139                 }
01140                 else {
01141                     degrees[var_map[e[j]]] = MaX(degrees[var_map[e[j]]], e[j+1]);
01142                 }
01143             }
01144         }
01145     }
01146 }
01147
01148 if ( sort_vars ) {
01149     // bubble sort variables in decreasing order of degree
01150     // (this seems better for factorization)
01151     for ( size_t i = 0; i < var_map.size(); i++ ) {
01152         for ( size_t j = 0; j+1 < var_map.size(); j++ ) {
01153             if ( degrees[j] < degrees[j+1] ) {
01154                 swap(degrees[j], degrees[j+1]);
01155
01156                 // Find the map keys associated with the values we want to swap
01157                 uint32_t j0 = 0;
01158                 uint32_t j1 = 0;
01159                 for ( auto x: var_map ) {
01160                     if ( x.second == j ) {
01161                         j0 = x.first;
01162                     }
01163                     else if ( x.second == j+1 ) {
01164                         j1 = x.first;
01165                     }
01166                 }
01167                 swap(var_map.at(j0), var_map.at(j1));
01168             }
01169         }
01170     }
01171 }
01172 // Otherwise, sort lexicographically in FORM's ordering
01173 else {
01174     for ( size_t i = 0; i < var_map.size(); i++ ) {
01175         for ( size_t j = 0; j+1 < var_map.size(); j++ ) {
01176             uint32_t j0 = 0;
01177             uint32_t j1 = 0;
01178             for ( auto x: var_map ) {
01179                 if ( x.second == j ) {
01180                     j0 = x.first;
01181                 }
01182                 else if ( x.second == j+1 ) {
01183                     j1 = x.first;
01184                 }
01185             }
01186             if ( j0 > j1 ) {
01187                 swap(var_map.at(j0), var_map.at(j1));
01188             }
01189         }
01190     }
01191 }
01192
01193 if ( var_map.size() == 1 ) {
01194     // In the univariate case, if the polynomials are sufficiently sparse force the use of the
01195     // multivariate routines, which use a sparse representation, by adding a dummy map entry.
01196     if ( (float)num_terms <= UNIVARIATE_DENSITY_THR * (float)degrees[0] ) {
01197         // -1 will never be a symbol code. Built-in symbols from 0 to 19, and 20 is the first
01198         // user symbol.
01199         var_map[-1] = num_vars;
01200     }
01201 }
01202
01203 return var_map;

```

```

01204 }
01205 /*
01206     #] flint::get_variables :
01207
01208     #[ flint::inverse_poly :
01209 */
01210 WORD* flint::inverse_poly(BHEAD const WORD *a, const WORD *b, const var_map_t &var_map) {
01211
01212     flint::poly pa, pb, denpa, denpb;
01213
01214     flint::from_argument_poly(pa.d, denpa.d, a, false);
01215     flint::from_argument_poly(pb.d, denpb.d, b, false);
01216
01217     // fmpz_poly_xgcd is undefined if the content of pa and pb are not 1. Take the content out.
01218     // fmpz_poly_content gives the non-negative content and fmpz_poly_primitive normalizes to a
01219     // non-negative lcoeff, so we need to add the sign to the content if the polys have a negative
01220     // lcoeff. We don't need to keep the content of pb, it is a numerical multiple of the modulus.
01221     flint::fmpz content_a, resultant;
01222     flint::poly inverse, tmp;
01223     fmpz_poly_content(content_a.d, pa.d);
01224     if ( fmpz_sgn(fmpz_poly_lead(pa.d)) == -1 ) {
01225         fmpz_neg(content_a.d, content_a.d);
01226     }
01227     fmpz_poly_primitive_part(pa.d, pa.d);
01228     fmpz_poly_primitive_part(pb.d, pb.d);
01229
01230     // Special cases:
01231     // Possibly strange that we give 1 for inverse_(x1,1) but here we take MMA's convention.
01232     if ( fmpz_poly_is_one(pa.d) && fmpz_poly_is_one(pb.d) ) {
01233         fmpz_poly_one(inverse.d);
01234         fmpz_one(resultant.d);
01235     }
01236     else if ( fmpz_poly_is_one(pb.d) ) {
01237         fmpz_poly_zero(inverse.d);
01238         fmpz_one(resultant.d);
01239     }
01240     else {
01241         // Now use the extended Euclidean algorithm to find inverse, resultant, tmp of the Bezout
01242         // identity: inverse*pa + tmp*pb = resultant. Then inverse/resultant is the multiplicative
01243         // inverse of pa mod pb. We'll divide by resultant in the denscale argument of
01244         to_argument_poly.
01245         fmpz_poly_xgcd(resultant.d, inverse.d, tmp.d, pa.d, pb.d);
01246
01247         // If the resultant is zero, the inverse does not exist:
01248         if ( fmpz_is_zero(resultant.d) ) {
01249             MLOCK(ErrorMessageLock);
01250             MesPrint("flint::inverse_poly error: inverse does not exist");
01251             MUNLOCK(ErrorMessageLock);
01252             Terminate(-1);
01253         }
01254     }
01255
01256     // Multiply inverse by denpa. denpb is a numerical multiple of the modulus, so doesn't matter.
01257     // We also need to divide by content_a, which we do in the denscale argument of to_argument_poly
01258     // by multiplying resultant by content_a here.
01259     fmpz_poly_mul(inverse.d, inverse.d, denpa.d);
01260     fmpz_mul(resultant.d, resultant.d, content_a.d);
01261
01262     WORD* res;
01263     // First determine the result size, and malloc. The result should have no arghead. Here we use
01264     // the "scale" argument of to_argument_poly since resultant might not be 1.
01265     const bool with_arghead = false;
01266     bool write = false;
01267     const bool must_fit_term = false;
01268     const uint64_t prev_size = 0;
01269     const uint64_t res_size = (uint64_t)flint::to_argument_poly(BHEAD NULL,
01270         with_arghead, must_fit_term, write, prev_size, inverse.d, var_map, resultant.d);
01271     res = (WORD*)Mallco1(sizeof(WORD)*res_size, "flint::inverse_poly");
01272
01273     write = true;
01274     flint::to_argument_poly(BHEAD res, with_arghead, must_fit_term, write, prev_size, inverse.d,
01275         var_map, resultant.d);
01276
01277     return res;
01278 }
01279 /*
01280     #] flint::inverse_poly :
01281
01282     #[ flint::mul_mpoly :
01283 */
01284 // Return a pointer to a buffer containing the product of the 0-terminated term lists at a and b.
01285 // For multi-variate cases.
01286 WORD* flint::mul_mpoly(BHEAD const WORD *a, const WORD *b, const var_map_t &var_map) {
01287
01288     flint::mpoly_ctx ctx(var_map.size());
01289     flint::mpoly pa(ctx.d), pb(ctx.d), denpa(ctx.d), denpb(ctx.d);

```

```

01290
01291 flint::from_argument_mpoly(pa.d, denpa.d, a, false, var_map, ctx.d);
01292 flint::from_argument_mpoly(pb.d, denpb.d, b, false, var_map, ctx.d);
01293
01294 // denpa, denpb must be integers. Negative symbol powers have been converted to extra symbols.
01295 if ( fmpz_mpoly_is_fmpz(denpa.d, ctx.d) != 1 ) {
01296     MLOCK(ErrorMessageLock);
01297     MesPrint("flint::mul_mpoly: error: denpa is non-constant");
01298     MUNLOCK(ErrorMessageLock);
01299     Terminate(-1);
01300 }
01301 if ( fmpz_mpoly_is_fmpz(denpb.d, ctx.d) != 1 ) {
01302     MLOCK(ErrorMessageLock);
01303     MesPrint("flint::mul_mpoly: error: denpb is non-constant");
01304     MUNLOCK(ErrorMessageLock);
01305     Terminate(-1);
01306 }
01307
01308 // Multiply numerators, store result in pa
01309 fmpz_mpoly_mul(pa.d, pa.d, pb.d, ctx.d);
01310 // Multiply denominators, store result in denpa, and convert to an fmpz:
01311 fmpz_mpoly_mul(denpa.d, denpa.d, denpb.d, ctx.d);
01312 flint::fmpz den;
01313 fmpz_mpoly_get_fmpz(den.d, denpa.d, ctx.d);
01314
01315 WORD* res;
01316 // First determine the result size, and malloc. The result should have no arghead. Here we use
01317 // the "scale" argument of to_argument_mpoly since den might not be 1.
01318 const bool with_arghead = false;
01319 bool write = false;
01320 const bool must_fit_term = false;
01321 const uint64_t prev_size = 0;
01322 const uint64_t mul_size = (uint64_t)flint::to_argument_mpoly(BHEAD NULL,
01323     with_arghead, must_fit_term, write, prev_size, pa.d, var_map, ctx.d, den.d);
01324 res = (WORD*)Malloc1(sizeof(WORD)*mul_size, "flint::mul_mpoly");
01325
01326 write = true;
01327 flint::to_argument_mpoly(BHEAD res, with_arghead, must_fit_term, write, prev_size, pa.d,
01328     var_map, ctx.d, den.d);
01329
01330 return res;
01331 }
01332 /*
01333 #] flint::mul_mpoly :
01334 #[ flint::mul_poly :
01335 */
01336 // Return a pointer to a buffer containing the product of the 0-terminated term lists at a and b.
01337 // For uni-variate cases.
01338 WORD* flint::mul_poly(PHEAD const WORD *a, const WORD *b, const var_map_t &var_map) {
01339
01340     flint::poly pa, pb, denpa, denpb;
01341
01342     flint::from_argument_poly(pa.d, denpa.d, a, false);
01343     flint::from_argument_poly(pb.d, denpb.d, b, false);
01344
01345     // denpa, denpb must be integers. Negative symbol powers have been converted to extra symbols.
01346     if ( fmpz_poly_degree(denpa.d) != 0 ) {
01347         MLOCK(ErrorMessageLock);
01348         MesPrint("flint::mul_poly: error: denpa is non-constant");
01349         MUNLOCK(ErrorMessageLock);
01350         Terminate(-1);
01351     }
01352     if ( fmpz_poly_degree(denpb.d) != 0 ) {
01353         MLOCK(ErrorMessageLock);
01354         MesPrint("flint::mul_poly: error: denpb is non-constant");
01355         MUNLOCK(ErrorMessageLock);
01356         Terminate(-1);
01357     }
01358
01359     // Multiply numerators, store result in pa
01360     fmpz_poly_mul(pa.d, pa.d, pb.d);
01361     // Multiply denominators, store result in denpa, and convert to an fmpz:
01362     fmpz_poly_mul(denpa.d, denpa.d, denpb.d);
01363     flint::fmpz den;
01364     fmpz_poly_get_coeff_fmpz(den.d, denpa.d, 0);
01365
01366     WORD* res;
01367     // First determine the result size, and malloc. The result should have no arghead. Here we use
01368     // the "scale" argument of to_argument_poly since den might not be 1.
01369     const bool with_arghead = false;
01370     bool write = false;
01371     const bool must_fit_term = false;
01372     const uint64_t prev_size = 0;
01373     const uint64_t mul_size = (uint64_t)flint::to_argument_poly(BHEAD NULL,
01374         with_arghead, must_fit_term, write, prev_size, pa.d, var_map, den.d);
01375     res = (WORD*)Malloc1(sizeof(WORD)*mul_size, "flint::mul_poly");
01376

```

```

01377     write = true;
01378     flint::to_argument_poly(BHEAD res, with_arghead, must_fit_term, write, prev_size, pa.d,
01379         var_map, den.d);
01380
01381     return res;
01382 }
01383 /*
01384 #] flint::mul_poly :
01385
01386 #[ flint::ratfun_add_mpoly :
01387 */
01388 // Add the multi-variate FORM rational polynomials at t1 and t2. The result is written at out.
01389 void flint::ratfun_add_mpoly(PHEAD const WORD *t1, const WORD *t2, WORD *out,
01390     const var_map_t &var_map) {
01391
01392     flint::mpoly_ctx ctx(var_map.size());
01393     flint::mpoly gcd(ctx.d), num1(ctx.d), den1(ctx.d), num2(ctx.d), den2(ctx.d);
01394
01395     flint::ratfun_read_mpoly(t1, num1.d, den1.d, var_map, ctx.d);
01396     flint::ratfun_read_mpoly(t2, num2.d, den2.d, var_map, ctx.d);
01397
01398     if ( fmpz_mpoly_cmp(den1.d, den2.d, ctx.d) != 0 ) {
01399         fmpz_mpoly_gcd_cofactors(gcd.d, den1.d, den2.d, den1.d, den2.d, ctx.d);
01400
01401         fmpz_mpoly_mul(num1.d, num1.d, den2.d, ctx.d);
01402         fmpz_mpoly_mul(num2.d, num2.d, den1.d, ctx.d);
01403
01404         fmpz_mpoly_add(num1.d, num1.d, num2.d, ctx.d);
01405         fmpz_mpoly_mul(den1.d, den1.d, den2.d, ctx.d);
01406         fmpz_mpoly_mul(den1.d, den1.d, gcd.d, ctx.d);
01407     }
01408     else {
01409         fmpz_mpoly_add(num1.d, num1.d, num2.d, ctx.d);
01410     }
01411
01412     // Finally divide out any common factors between the resulting num1, den1:
01413     fmpz_mpoly_gcd_cofactors(gcd.d, num1.d, den1.d, num1.d, den1.d, ctx.d);
01414
01415     flint::util::fix_sign_fmpz_mpoly_ratfun(num1.d, den1.d, ctx.d);
01416
01417     // Result in FORM notation:
01418     *out++ = AR.PolyFun;
01419     WORD* args_size = out++;
01420     WORD* args_flag = out++;
01421     *args_flag = 0; // clean prf
01422     FILLFUN3(out); // Remainder of funhead, if it is larger than 3
01423
01424     const bool with_arghead = true;
01425     const bool must_fit_term = true;
01426     const bool write = true;
01427     // prev_size + 4, to account for final term size and coeff of "1/1"
01428     out += flint::to_argument_mpoly(BHEAD out, with_arghead, must_fit_term, write, out-args_size+4,
01429         num1.d, var_map, ctx.d);
01430     out += flint::to_argument_mpoly(BHEAD out, with_arghead, must_fit_term, write, out-args_size+4,
01431         den1.d, var_map, ctx.d);
01432
01433     *args_size = out - args_size + 1; // The +1 is to include the function ID
01434     AT.WorkPointer = out;
01435 }
01436 /*
01437 #] flint::ratfun_add_mpoly :
01438 #[ flint::ratfun_add_poly :
01439 */
01440 // Add the uni-variate FORM rational polynomials at t1 and t2. The result is written at out.
01441 void flint::ratfun_add_poly(PHEAD const WORD *t1, const WORD *t2, WORD *out,
01442     const var_map_t &var_map) {
01443
01444     flint::poly gcd, num1, den1, num2, den2;
01445
01446     flint::ratfun_read_poly(t1, num1.d, den1.d);
01447     flint::ratfun_read_poly(t2, num2.d, den2.d);
01448
01449     if ( fmpz_poly_equal(den1.d, den2.d) == 0 ) {
01450         flint::util::simplify_fmpz_poly(den1.d, den2.d, gcd.d);
01451
01452         fmpz_poly_mul(num1.d, num1.d, den2.d);
01453         fmpz_poly_mul(num2.d, num2.d, den1.d);
01454
01455         fmpz_poly_add(num1.d, num1.d, num2.d);
01456         fmpz_poly_mul(den1.d, den1.d, den2.d);
01457         fmpz_poly_mul(den1.d, den1.d, gcd.d);
01458     }
01459     else {
01460         fmpz_poly_add(num1.d, num1.d, num2.d);
01461     }
01462
01463     // Finally divide out any common factors between the resulting num1, den1:

```

```

01464     flint::util::simplify_fmpz_poly(num1.d, den1.d, gcd.d);
01465
01466     flint::util::fix_sign_fmpz_poly_ratfun(num1.d, den1.d);
01467
01468     // Result in FORM notation:
01469     *out++ = AR.PolyFun;
01470     WORD* args_size = out++;
01471     WORD* args_flag = out++;
01472     *args_flag = 0; // clean prf
01473     FILLFUN3(out); // Remainder of funhead, if it is larger than 3
01474
01475     const bool with_arghead = true;
01476     const bool must_fit_term = true;
01477     const bool write = true;
01478     // prev_size + 4, to account for final term size and coeff of "1/1"
01479     out += flint::to_argument_poly(BHEAD out, with_arghead, must_fit_term, write, out-args_size+4,
01480         num1.d, var_map);
01481     out += flint::to_argument_poly(BHEAD out, with_arghead, must_fit_term, write, out-args_size+4,
01482         den1.d, var_map);
01483
01484     *args_size = out - args_size + 1; // The +1 is to include the function ID
01485     AT.WorkPointer = out;
01486 }
01487 /*
01488 #] flint::ratfun_add_poly :
01489
01490 #[ flint::ratfun_normalize_mpoly :
01491 */
01492 // Multiply and simplify occurrences of the multi-variate FORM rational polynomials found in term.
01493 // The final term is written in place, with the rational polynomial at the end.
01494 void flint::ratfun_normalize_mpoly(PHEAD WORD *term, const var_map_t &var_map) {
01495
01496     // The length of the coefficient
01497     const WORD ncoeff = (term + *term)[-1];
01498     // The end of the term data, before the coefficient:
01499     const WORD *tstop = term + *term - ABS(ncoeff);
01500
01501     flint::mpoly_ctx ctx(var_map.size());
01502     flint::mpoly num1(ctx.d), den1(ctx.d), num2(ctx.d), den2(ctx.d), gcd(ctx.d);
01503
01504     // Start with "trivial" polynomials, and multiply in the num and den of the prf which appear.
01505     flint::fmpz tmpNum, tmpDen;
01506     flint::fmpz_set_form(tmpNum.d, (UWORD*)tstop, ncoeff/2);
01507     flint::fmpz_set_form(tmpDen.d, (UWORD*)tstop+ABS(ncoeff/2), ABS(ncoeff/2));
01508     fmpz_mpoly_set_fmpz(num1.d, tmpNum.d, ctx.d);
01509     fmpz_mpoly_set_fmpz(den1.d, tmpDen.d, ctx.d);
01510
01511     // Loop over the occurrences of PolyFun in the term, and multiply in to num1, den1.
01512     // s tracks where we are writing the non-PolyFun term data. The final PolyFun will
01513     // go at the end.
01514     WORD* term_size = term;
01515     WORD* s = term + 1;
01516     for ( WORD *t = term + 1; t < tstop; ) {
01517         if ( *t == AR.PolyFun ) {
01518             flint::ratfun_read_mpoly(t, num2.d, den2.d, var_map, ctx.d);
01519
01520             // get gcd of num1,den2 and num2,den1 and then assemble
01521             fmpz_mpoly_gcd_cofactors(gcd.d, num1.d, den2.d, num1.d, den2.d, ctx.d);
01522             fmpz_mpoly_gcd_cofactors(gcd.d, num2.d, den1.d, num2.d, den1.d, ctx.d);
01523
01524             fmpz_mpoly_mul(num1.d, num1.d, num2.d, ctx.d);
01525             fmpz_mpoly_mul(den1.d, den1.d, den2.d, ctx.d);
01526
01527             t += t[1];
01528         }
01529
01530         else {
01531             // Not a PolyFun, just copy or skip over
01532             WORD i = t[1];
01533             if ( s != t ) { NCOPY(s,t,i); }
01534             else { t += i; s += i; }
01535         }
01536     }
01537
01538     flint::util::fix_sign_fmpz_mpoly_ratfun(num1.d, den1.d, ctx.d);
01539
01540     // Result in FORM notation:
01541     WORD* out = s;
01542     *out++ = AR.PolyFun;
01543     WORD* args_size = out++;
01544     WORD* args_flag = out++;
01545     *args_flag &= ~MUSTCLEANPRF;
01546
01547     const bool with_arghead = true;
01548     const bool must_fit_term = true;
01549     const bool write = true;
01550     out += flint::to_argument_mpoly(BHEAD out, with_arghead, must_fit_term, write, out-term_size,

```

```

01551     num1.d, var_map, ctx.d);
01552 out += flint::to_argument_mpoly(BHEAD out, with_arghead, must_fit_term, write, out-term_size,
01553     den1.d, var_map, ctx.d);
01554
01555 *args_size = out - args_size + 1; // The +1 is to include the function ID
01556
01557 // +3 for the coefficient of 1/1, which is added after the check
01558 if ( sizeof(WORD)*(out-term_size+3) > (size_t)AM.MaxTer ) {
01559     MLOCK(ErrorMessageLock);
01560     MesPrint("flint::ratfun_normalize: output exceeds MaxTermSize");
01561     MUNLOCK(ErrorMessageLock);
01562     Terminate(-1);
01563 }
01564
01565 *out++ = 1;
01566 *out++ = 1;
01567 *out++ = 3; // the term's coefficient is now 1/1
01568
01569 *term_size = out - term_size;
01570 }
01571 /*
01572 #] flint::ratfun_normalize_mpoly :
01573 #[ flint::ratfun_normalize_poly :
01574 */
01575 // Multiply and simplify occurrences of the uni-variate FORM rational polynomials found in term.
01576 // The final term is written in place, with the rational polynomial at the end.
01577 void flint::ratfun_normalize_poly(PHEAD WORD *term, const var_map_t &var_map) {
01578
01579     // The length of the coefficient
01580     const WORD ncoeff = (term + *term)[-1];
01581     // The end of the term data, before the coefficient:
01582     const WORD *tstop = term + *term - ABS(ncoeff);
01583
01584     flint::poly num1, den1, num2, den2, gcd;
01585
01586     // Start with "trivial" polynomials, and multiply in the num and den of the prf which appear.
01587     flint::fmpz tmpNum, tmpDen;
01588     flint::fmpz_set_form(tmpNum.d, (UWORD*)tstop, ncoeff/2);
01589     flint::fmpz_set_form(tmpDen.d, (UWORD*)tstop+ABS(ncoeff/2), ABS(ncoeff/2));
01590     fmpz_poly_set_fmpz(num1.d, tmpNum.d);
01591     fmpz_poly_set_fmpz(den1.d, tmpDen.d);
01592
01593     // Loop over the occurrences of PolyFun in the term, and multiply in to num1, den1.
01594     // s tracks where we are writing the non-PolyFun term data. The final PolyFun will
01595     // go at the end.
01596     WORD* term_size = term;
01597     WORD* s = term + 1;
01598     for ( WORD *t = term + 1; t < tstop; ) {
01599         if ( *t == AR.PolyFun ) {
01600             flint::ratfun_read_poly(t, num2.d, den2.d);
01601
01602             // get gcd of num1,den2 and num2,den1 and then assemble
01603             flint::util::simplify_fmpz_poly(num1.d, den2.d, gcd.d);
01604             flint::util::simplify_fmpz_poly(num2.d, den1.d, gcd.d);
01605
01606             fmpz_poly_mul(num1.d, num1.d, num2.d);
01607             fmpz_poly_mul(den1.d, den1.d, den2.d);
01608
01609             t += t[1];
01610         }
01611
01612         else {
01613             // Not a PolyFun, just copy or skip over
01614             WORD i = t[1];
01615             if ( s != t ) { NCOPY(s,t,i); }
01616             else { t += i; s += i; }
01617         }
01618     }
01619
01620     flint::util::fix_sign_fmpz_poly_ratfun(num1.d, den1.d);
01621
01622     // Result in FORM notation:
01623     WORD* out = s;
01624     *out++ = AR.PolyFun;
01625     WORD* args_size = out++;
01626     WORD* args_flag = out++;
01627     *args_flag &= ~MUSTCLEANPRF;
01628
01629     const bool with_arghead = true;
01630     const bool must_fit_term = true;
01631     const bool write = true;
01632     out += flint::to_argument_poly(BHEAD out, with_arghead, must_fit_term, write, out-term_size,
01633     num1.d, var_map);
01634     out += flint::to_argument_poly(BHEAD out, with_arghead, must_fit_term, write, out-term_size,
01635     den1.d, var_map);
01636
01637     *args_size = out - args_size + 1; // The +1 is to include the function ID

```

```

01638
01639 // +3 for the coefficient of 1/1, which is added after the check
01640 if ( sizeof(WORD)*(out-term_size+3) > (size_t)AM.MaxTer ) {
01641     MLOCK(ErrorMessageLock);
01642     MesPrint("flint::ratfun_normalize: output exceeds MaxTermSize");
01643     MUNLOCK(ErrorMessageLock);
01644     Terminate(-1);
01645 }
01646
01647 *out++ = 1;
01648 *out++ = 1;
01649 *out++ = 3; // the term's coefficient is now 1/1
01650
01651 *term_size = out - term_size;
01652 }
01653 /*
01654 #] flint::ratfun_normalize_poly :
01655
01656 #[ flint::ratfun_read_mpoly :
01657 */
01658 // Read the multi-variate FORM rational polynomial at a and create fmpz_mpoly_t numerator and
01659 // denominator.
01660 void flint::ratfun_read_mpoly(const WORD *a, fmpz_mpoly_t num, fmpz_mpoly_t den,
01661     const var_map_t &var_map, fmpz_mpoly_ctx_t ctx) {
01662
01663     // The end of the arguments:
01664     const WORD* arg_stop = a+a[1];
01665
01666     const bool must_normalize = (a[2] & MUSTCLEANPRF) != 0;
01667
01668     a += FUNHEAD;
01669     if ( a >= arg_stop ) {
01670         MLOCK(ErrorMessageLock);
01671         MesPrint("ERROR: PolyRatFun cannot have zero arguments");
01672         MUNLOCK(ErrorMessageLock);
01673         Terminate(-1);
01674     }
01675
01676     // Polys to collect the "den of the num" and "den of the den".
01677     // Input can arrive like this when enabling the PolyRatFun or moving things into it.
01678     flint::mpoly den_num(ctx), den_den(ctx);
01679
01680     // Read the numerator
01681     flint::from_argument_mpoly(num, den_num.d, a, true, var_map, ctx);
01682     NEXTARG(a);
01683
01684     if ( a < arg_stop ) {
01685         // Read the denominator
01686         flint::from_argument_mpoly(den, den_den.d, a, true, var_map, ctx);
01687         NEXTARG(a);
01688     }
01689     else {
01690         // The denominator is 1
01691         MLOCK(ErrorMessageLock);
01692         MesPrint("implement this");
01693         MUNLOCK(ErrorMessageLock);
01694         Terminate(-1);
01695     }
01696     if ( a < arg_stop ) {
01697         MLOCK(ErrorMessageLock);
01698         MesPrint("ERROR: PolyRatFun cannot have more than two arguments");
01699         MUNLOCK(ErrorMessageLock);
01700         Terminate(-1);
01701     }
01702
01703     // Multiply the num by den_den and den by den_num:
01704     fmpz_mpoly_mul(num, num, den_den.d, ctx);
01705     fmpz_mpoly_mul(den, den, den_num.d, ctx);
01706
01707     if ( must_normalize ) {
01708         flint::mpoly gcd(ctx);
01709         fmpz_mpoly_gcd_cofactors(gcd.d, num, den, num, den, ctx);
01710     }
01711 }
01712 /*
01713 #] flint::ratfun_read_mpoly :
01714 #[ flint::ratfun_read_poly :
01715 */
01716 // Read the uni-variate FORM rational polynomial at a and create fmpz_mpoly_t numerator and
01717 // denominator.
01718 void flint::ratfun_read_poly(const WORD *a, fmpz_poly_t num, fmpz_poly_t den) {
01719
01720     // The end of the arguments:
01721     const WORD* arg_stop = a+a[1];
01722
01723     const bool must_normalize = (a[2] & MUSTCLEANPRF) != 0;
01724

```

```

01725     a += FUNHEAD;
01726     if ( a >= arg_stop ) {
01727         MLOCK(ErrorMessageLock);
01728         MesPrint("ERROR: PolyRatFun cannot have zero arguments");
01729         MUNLOCK(ErrorMessageLock);
01730         Terminate(-1);
01731     }
01732
01733     // Polys to collect the "den of the num" and "den of the den".
01734     // Input can arrive like this when enabling the PolyRatFun or moving things into it.
01735     flint::poly den_num, den_den;
01736
01737     // Read the numerator
01738     flint::from_argument_poly(num, den_num.d, a, true);
01739     NEXTARG(a);
01740
01741     if ( a < arg_stop ) {
01742         // Read the denominator
01743         flint::from_argument_poly(den, den_den.d, a, true);
01744         NEXTARG(a);
01745     }
01746     else {
01747         // The denominator is 1
01748         MLOCK(ErrorMessageLock);
01749         MesPrint("implement this");
01750         MUNLOCK(ErrorMessageLock);
01751         Terminate(-1);
01752     }
01753     if ( a < arg_stop ) {
01754         MLOCK(ErrorMessageLock);
01755         MesPrint("ERROR: PolyRatFun cannot have more than two arguments");
01756         MUNLOCK(ErrorMessageLock);
01757         Terminate(-1);
01758     }
01759
01760     // Multiply the num by den_den and den by den_num:
01761     fmpz_poly_mul(num, num, den_den.d);
01762     fmpz_poly_mul(den, den, den_num.d);
01763
01764     if ( must_normalize ) {
01765         flint::poly gcd;
01766         flint::util::simplify_fmpz_poly(num, den, gcd.d);
01767     }
01768 }
01769 /*
01770 #] flint::ratfun_read_poly :
01771 #[ flint::to_argument_mpoly :
01772 */
01773 // Convert a fmpz_mpoly_t to a FORM argument (or 0-terminated list of terms: with_arghead==false).
01774 // If the caller is building an output term, prev_size contains the size of the term so far, to
01775 // check that the output fits in AM.MaxTer if must_fit_term.
01776 // All coefficients will be divided by denscale (which might just be 1).
01777 // If write is false, we never write to out but only track the total would-be size. This lets this
01778 // function be repurposed as a "size of FORM notation" function without duplicating the code.
01779 #define IFW(x) { if ( write ) {x;} }
01780 uint64_t flint::to_argument_mpoly(PHEAD WORD *out, const bool with_arghead,
01781     const bool must_fit_term, const bool write, const uint64_t prev_size, const fmpz_mpoly_t poly,
01782     const var_map_t &var_map, const fmpz_mpoly_ctx_t ctx, const fmpz_t denscale) {
01783
01784     // out is modified later, keep the pointer at entry
01785     const WORD* out_entry = out;
01786
01787     // Track the total size written. We could do this with pointer differences, but if
01788     // write == false we don't write to or move out to be able to find the size that way.
01789     uint64_t ws = 0;
01790
01791     // Check there is at least space for ARGHEAD WORDs (the arghead or fast-notation number/symbol)
01792     if ( write && must_fit_term && (sizeof(WORD)*(prev_size + ARGHEAD) > (size_t)AM.MaxTer) ) {
01793         MLOCK(ErrorMessageLock);
01794         MesPrint("flint::to_argument_mpoly: output exceeds MaxTermSize");
01795         MUNLOCK(ErrorMessageLock);
01796         Terminate(-1);
01797     }
01798
01799     // Create the inverse of var_map, so we don't have to search it for each symbol written
01800     var_map_t var_map_inv;
01801     for ( auto x: var_map ) {
01802         var_map_inv[x.second] = x.first;
01803     }
01804
01805     vector<int64_t> exponents(var_map.size());
01806     const int64_t n_terms = fmpz_mpoly_length(poly, ctx);
01807
01808     if ( n_terms == 0 ) {
01809         if ( with_arghead ) {
01810             IFW(*out++ = -SNUMBER); ws++;
01811             IFW(*out++ = 0); ws++;

```



```

01812         return ws;
01813     }
01814     else {
01815         IFW(*out++ = 0); ws++;
01816         return ws;
01817     }
01818 }
01819
01820 // For dividing out denscale
01821 flint::fmpz coeff, den, gcd;
01822
01823 // The mpoly might be constant or a single symbol with coeff 1. Use fast notation if possible.
01824 if ( with_arghead && n_terms == 1 ) {
01825
01826     if ( fmpz_mpoly_is_fmpz(poly, ctx) ) {
01827         // The mpoly is constant. Use fast notation if the number is an integer and small enough:
01828
01829         fmpz_mpoly_get_term_coeff_fmpz(coeff.d, poly, 0, ctx);
01830         fmpz_set(den.d, denscale);
01831         flint::util::simplify_fmpz(coeff.d, den.d, gcd.d);
01832
01833         if ( fmpz_is_one(den.d) && fmpz_fits_si(coeff.d) ) {
01834             const int64_t fast_coeff = fmpz_get_si(coeff.d);
01835             // While ">=", could work here, FORM does not use fast notation for INT_MIN
01836             if ( fast_coeff > INT32_MIN && fast_coeff <= INT32_MAX ) {
01837                 IFW(*out++ = -SNUMBER); ws++;
01838                 IFW(*out++ = (WORD)fast_coeff); ws++;
01839                 return ws;
01840             }
01841         }
01842     }
01843
01844     else {
01845         fmpz_mpoly_get_term_coeff_fmpz(coeff.d, poly, 0, ctx);
01846         fmpz_set(den.d, denscale);
01847         flint::util::simplify_fmpz(coeff.d, den.d, gcd.d);
01848
01849         if ( fmpz_is_one(coeff.d) && fmpz_is_one(den.d) ) {
01850             // The coefficient is one. Now check the symbol powers:
01851
01852             fmpz_mpoly_get_term_exp_si((slong*)exponents.data(), poly, 0, ctx);
01853             int64_t use_fast = 0;
01854             uint32_t fast_symbol = 0;
01855
01856             for ( size_t i = 0; i < var_map.size(); i++ ) {
01857                 if ( exponents[i] == 1 ) fast_symbol = var_map_inv[i];
01858                 use_fast += exponents[i];
01859             }
01860
01861             // use_fast has collected the total degree. If it is 1, then fast_symbol holds the
01862             code
01863             if ( use_fast == 1 ) {
01864                 IFW(*out++ = -SYMBOL); ws++;
01865                 IFW(*out++ = fast_symbol); ws++;
01866                 return ws;
01867             }
01868         }
01869     }
01870 }
01871
01872 WORD *tmp_coeff = (WORD *)NumberMalloc("flint::to_argument_mpoly");
01873 WORD *tmp_den = (WORD *)NumberMalloc("flint::to_argument_mpoly");
01874
01875 WORD* arg_size = 0;
01876 WORD* arg_flag = 0;
01877 if ( with_arghead ) {
01878     IFW(arg_size = out++); ws++; // total arg size
01879     IFW(arg_flag = out++); ws++;
01880     IFW(*arg_flag = 0); // clean argument
01881 }
01882
01883 for ( int64_t i = 0; i < n_terms; i++ ) {
01884
01885     fmpz_mpoly_get_term_exp_si((slong*)exponents.data(), poly, i, ctx);
01886
01887     fmpz_mpoly_get_term_coeff_fmpz(coeff.d, poly, i, ctx);
01888     fmpz_set(den.d, denscale);
01889     flint::util::simplify_fmpz(coeff.d, den.d, gcd.d);
01890
01891     uint32_t num_symbols = 0;
01892     for ( size_t j = 0; j < var_map.size(); j++ ) {
01893         if ( exponents[j] != 0 ) { num_symbols += 1; }
01894     }
01895
01896     // Convert the coefficient, write in temporary space
01897     const WORD num_size = flint::fmpz_get_form(coeff.d, tmp_coeff);

```

```

01898     const WORD den_size = flint::fmpz_get_form(den.d, tmp_den);
01899     const WORD coeff_size = [num_size, den_size] () -> WORD {
01900         WORD size = ABS(num_size) > ABS(den_size) ? ABS(num_size) : ABS(den_size);
01901         return size * SGN(num_size) * SGN(den_size);
01902     }();
01903
01904     // Now we have the number of symbols and the coeff size, we can determine the output size.
01905     // Check it fits if necessary: term size, num,den of "coeff_size", +1 for total coeff size
01906     uint64_t current_size = prev_size + ws + 1 + 2*ABS(coeff_size) + 1;
01907     if ( num_symbols ) {
01908         // symbols header, code,power of each symbol:
01909         current_size += 2 + 2*num_symbols;
01910     }
01911     if ( write && must_fit_term && (sizeof(WORD)*current_size > (size_t)AM.MaxTer) ) {
01912         MLOCK(ErrorMessageLock);
01913         MesPrint("flint::to_argument_mpoly: output exceeds MaxTermSize");
01914         MUNLOCK(ErrorMessageLock);
01915         Terminate(-1);
01916     }
01917
01918     WORD* term_size = 0;
01919     IFW(term_size = out++); ws++;
01920     if ( num_symbols ) {
01921         IFW(*out++ = SYMBOL); ws++;
01922         WORD* symbol_size = 0;
01923         IFW(symbol_size = out++); ws++;
01924         IFW(*symbol_size = 2);
01925
01926         for ( size_t j = 0; j < var_map.size(); j++ ) {
01927             if ( exponents[j] != 0 ) {
01928                 IFW(*out++ = var_map_inv[j]); ws++;
01929                 IFW(*out++ = exponents[j]); ws++;
01930                 IFW(*symbol_size += 2);
01931             }
01932         }
01933     }
01934
01935     // Copy numerator
01936     for ( WORD j = 0; j < ABS(num_size); j++ ) {
01937         IFW(*out++ = tmp_coeff[j]); ws++;
01938     }
01939     for ( WORD j = ABS(num_size); j < ABS(coeff_size); j++ ) {
01940         IFW(*out++ = 0); ws++;
01941     }
01942     // Copy denominator
01943     for ( WORD j = 0; j < ABS(den_size); j++ ) {
01944         IFW(*out++ = tmp_den[j]); ws++;
01945     }
01946     for ( WORD j = ABS(den_size); j < ABS(coeff_size); j++ ) {
01947         IFW(*out++ = 0); ws++;
01948     }
01949
01950     IFW(*out = 2*ABS(coeff_size) + 1); // the size of the coefficient
01951     IFW(if ( coeff_size < 0 ) { *out = -(*out); });
01952     IFW(out++); ws++;
01953
01954     IFW(*term_size = out - term_size);
01955 }
01956
01957 if ( with_arghead ) {
01958     IFW(*arg_size = out - arg_size);
01959     if ( write ) {
01960         // Sort into form highfirst ordering
01961         flint::form_sort(BHEAD (WORD*)(out_entry));
01962     }
01963 }
01964 else {
01965     // with no arghead, we write a terminating zero
01966     IFW(*out++ = 0); ws++;
01967 }
01968
01969 NumberFree(tmp_coeff, "flint::to_argument_mpoly");
01970 NumberFree(tmp_den, "flint::to_argument_mpoly");
01971
01972 return ws;
01973 }
01974
01975 // If no denscale argument is supplied, just set it to 1 and call the usual function
01976 uint64_t flint::to_argument_mpoly(PHEAD WORD *out, const bool with_arghead,
01977     const bool must_fit_term, const bool write, const uint64_t prev_size, const fmpz_mpoly_t poly,
01978     const var_map_t &var_map, const fmpz_mpoly_ctx_t ctx) {
01979
01980     flint::fmpz tmp;
01981     fmpz_set_ui(tmp.d, 1);
01982
01983     uint64_t ret = flint::to_argument_mpoly(BHEAD out, with_arghead, must_fit_term, write,
01984         prev_size, poly, var_map, ctx, tmp.d);

```

```

01985
01986     return ret;
01987 }
01988 /*
01989 #] flint::to_argument_mpoly :
01990 #[ flint::to_argument_poly :
01991 */
01992 // Convert a fmpz_poly_t to a FORM argument (or 0-terminated list of terms: with_arghead==false).
01993 // If the caller is building an output term, prev_size contains the size of the term so far, to
01994 // check that the output fits in AM.MaxTer if must_fit_term.
01995 // All coefficients will be divided by denscale (which might just be 1).
01996 // If write is false, we never write to out but only track the total would-be size. This lets this
01997 // function be repurposed as a "size of FORM notation" function without duplicating the code.
01998 uint64_t flint::to_argument_poly(PHEAD WORD *out, const bool with_arghead,
01999     const bool must_fit_term, const bool write, const uint64_t prev_size, const fmpz_poly_t poly,
02000     const var_map_t &var_map, const fmpz_t denscale) {
02001
02002     // Track the total size written. We could do this with pointer differences, but if
02003     // write == false we don't write to or move out to be able to find the size that way.
02004     uint64_t ws = 0;
02005
02006     // Check there is at least space for ARGHEAD WORDs (the arghead or fast-notation number/symbol)
02007     if ( write && must_fit_term && (sizeof(WORD)*(prev_size + ARGHEAD) > (size_t)AM.MaxTer) ) {
02008         MLOCK(ErrorMessageLock);
02009         MesPrint("flint::to_argument_poly: output exceeds MaxTermSize");
02010         MUNLOCK(ErrorMessageLock);
02011         Terminate(-1);
02012     }
02013
02014     // Create the inverse of var_map, so we don't have to search it for each symbol written
02015     var_map_t var_map_inv;
02016     for ( auto x: var_map ) {
02017         var_map_inv[x.second] = x.first;
02018     }
02019
02020     const int64_t n_terms = fmpz_poly_length(poly);
02021
02022     // The poly is zero
02023     if ( n_terms == 0 ) {
02024         if ( with_arghead ) {
02025             IFW(*out++ = -SNUMBER); ws++;
02026             IFW(*out++ = 0); ws++;
02027             return ws;
02028         }
02029         else {
02030             IFW(*out++ = 0); ws++;
02031             return ws;
02032         }
02033     }
02034
02035     // For dividing out denscale
02036     flint::fmpz coeff, den, gcd;
02037
02038     // The poly is constant, use fast notation if the coefficient is integer and small enough
02039     if ( with_arghead && n_terms == 1 ) {
02040
02041         fmpz_poly_get_coeff_fmpz(coeff.d, poly, 0);
02042         fmpz_set(den.d, denscale);
02043         flint::util::simplify_fmpz(coeff.d, den.d, gcd.d);
02044
02045         if ( fmpz_is_one(den.d) && fmpz_fits_si(coeff.d) ) {
02046             const long fast_coeff = fmpz_get_si(coeff.d);
02047             // While ">=", could work here, FORM does not use fast notation for INT_MIN
02048             if ( fast_coeff > INT_MIN && fast_coeff <= INT_MAX ) {
02049                 IFW(*out++ = -SNUMBER); ws++;
02050                 IFW(*out++ = (WORD)fast_coeff); ws++;
02051                 return ws;
02052             }
02053         }
02054     }
02055
02056     // The poly might be a single symbol with coeff 1, use fast notation if so.
02057     if ( with_arghead && n_terms == 2 ) {
02058         if ( fmpz_is_zero(fmpz_poly_get_coeff_ptr(poly, 0)) ) {
02059             // The constant term is zero
02060
02061             fmpz_poly_get_coeff_fmpz(coeff.d, poly, 1);
02062             fmpz_set(den.d, denscale);
02063             flint::util::simplify_fmpz(coeff.d, den.d, gcd.d);
02064
02065             if ( fmpz_is_one(coeff.d) && fmpz_is_one(den.d) ) {
02066                 // Single symbol with coeff 1. Use fast notation:
02067                 IFW(*out++ = -SYMBOL); ws++;
02068                 IFW(*out++ = var_map_inv[0]); ws++;
02069                 return ws;
02070             }
02071         }
02072     }

```

```

02072     }
02073
02074     WORD *tmp_coeff = (WORD *)NumberMalloc("flint::to_argument_poly");
02075     WORD *tmp_den = (WORD *)NumberMalloc("flint::to_argument_mpoly");
02076
02077     WORD* arg_size = 0;
02078     WORD* arg_flag = 0;
02079     if ( with_arghead ) {
02080         IFW(arg_size = out++); ws++; // total arg size
02081         IFW(arg_flag = out++); ws++;
02082         IFW(*arg_flag = 0); // clean argument
02083     }
02084
02085     // In reverse, since we want a "highfirst" output
02086     for ( int64_t i = n_terms-1; i >= 0; i-- ) {
02087
02088         // fmpz_poly is dense, there might be many zero coefficients:
02089         if ( !fmpz_is_zero(fmpz_poly_get_coeff_ptr(poly, i)) ) {
02090
02091             fmpz_poly_get_coeff_fmpz(coeff.d, poly, i);
02092             fmpz_set(den.d, denscale);
02093             flint::util::simplify_fmpz(coeff.d, den.d, gcd.d);
02094
02095             // Convert the coefficient, write in temporary space
02096             const WORD num_size = flint::fmpz_get_form(coeff.d, tmp_coeff);
02097             const WORD den_size = flint::fmpz_get_form(den.d, tmp_den);
02098             const WORD coeff_size = [num_size, den_size] () -> WORD {
02099                 WORD size = ABS(num_size) > ABS(den_size) ? ABS(num_size) : ABS(den_size);
02100                 return size * SGN(num_size) * SGN(den_size);
02101             }();
02102
02103             // Now we have the coeff size, we can determine the output size
02104             // Check it fits if necessary: symbol code, power, num, den of "coeff_size",
02105             // +1 for total coeff size
02106             uint64_t current_size = prev_size + ws + 1 + 2*ABS(coeff_size) + 1;
02107             if ( i > 0 ) {
02108                 // and also symbols header, code, power of the symbol
02109                 current_size += 4;
02110             }
02111             if ( write && must_fit_term && (sizeof(WORD)*current_size > (size_t)AM.MaxTer) ) {
02112                 MLOCK(ErrorMessageLock);
02113                 MesPrint("flint::to_argument_poly: output exceeds MaxTermSize");
02114                 MUNLOCK(ErrorMessageLock);
02115                 Terminate(-1);
02116             }
02117
02118             WORD* term_size = 0;
02119             IFW(term_size = out++); ws++;
02120
02121             if ( i > 0 ) {
02122                 IFW(*out++ = SYMBOL); ws++;
02123                 IFW(*out++ = 4); ws++; // The symbol array size, it is univariate
02124                 IFW(*out++ = var_map_inv[0]); ws++;
02125                 IFW(*out++ = i); ws++;
02126             }
02127
02128             // Copy numerator
02129             for ( WORD j = 0; j < ABS(num_size); j++ ) {
02130                 IFW(*out++ = tmp_coeff[j]); ws++;
02131             }
02132             for ( WORD j = ABS(num_size); j < ABS(coeff_size); j++ ) {
02133                 IFW(*out++ = 0); ws++;
02134             }
02135             // Copy denominator
02136             for ( WORD j = 0; j < ABS(den_size); j++ ) {
02137                 IFW(*out++ = tmp_den[j]); ws++;
02138             }
02139             for ( WORD j = ABS(den_size); j < ABS(coeff_size); j++ ) {
02140                 IFW(*out++ = 0); ws++;
02141             }
02142
02143             IFW(*out = 2*ABS(coeff_size) + 1); // the size of the coefficient
02144             IFW(if ( coeff_size < 0 ) { *out = -(out); });
02145             IFW(out++); ws++;
02146
02147             IFW(*term_size = out - term_size);
02148         }
02149     }
02150 }
02151
02152 if ( with_arghead ) {
02153     IFW(*arg_size = out - arg_size);
02154 }
02155 else {
02156     // with no arghead, we write a terminating zero
02157     IFW(*out++ = 0); ws++;
02158 }

```

```

02159
02160     NumberFree(tmp_coeff, "flint::to_argument_poly");
02161     NumberFree(tmp_den, "flint::to_argument_poly");
02162
02163     return ws;
02164 }
02165
02166 // If no denscale argument is supplied, just set it to 1 and call the usual function
02167 uint64_t flint::to_argument_poly(PHEAD WORD *out, const bool with_arghead,
02168     const bool must_fit_term, const bool write, const uint64_t prev_size, const fmpz_poly_t poly,
02169     const var_map_t &var_map) {
02170
02171     fmpz_t tmp;
02172     fmpz_set_ui(tmp.d, 1);
02173
02174     uint64_t ret = flint::to_argument_poly(BHEAD out, with_arghead, must_fit_term, write, prev_size,
02175         poly, var_map, tmp.d);
02176
02177     return ret;
02178 }
02179 /*
02180 #] flint::to_argument_poly :
02181 */
02182
02183 // Utility functions
02184 /*
02185 #[ flint::util::simplify_fmpz :
02186 */
02187 // Divide the GCD out of num and den
02188 inline void flint::util::simplify_fmpz(fmpz_t num, fmpz_t den, fmpz_t gcd) {
02189     fmpz_gcd(gcd, num, den);
02190     if ( !fmpz_is_one(gcd) ) {
02191         fmpz_divexact(num, num, gcd);
02192         fmpz_divexact(den, den, gcd);
02193     }
02194 }
02195 /*
02196 #] flint::util::simplify_fmpz :
02197 #[ flint::util::simplify_fmpz_poly :
02198 */
02199 // Divide the GCD out of num and den
02200 inline void flint::util::simplify_fmpz_poly(fmpz_poly_t num, fmpz_poly_t den, fmpz_poly_t gcd) {
02201     fmpz_poly_gcd(gcd, num, den);
02202     if ( !fmpz_poly_is_one(gcd) ) {
02203 #if __FLINT_RELEASE >= 30100
02204         // This should be faster than fmpz_poly_div, see https://github.com/flintlib/flint/pull/1766
02205         fmpz_poly_divexact(num, num, gcd);
02206         fmpz_poly_divexact(den, den, gcd);
02207 #else
02208         fmpz_poly_div(num, num, gcd);
02209         fmpz_poly_div(den, den, gcd);
02210 #endif
02211     }
02212 }
02213 /*
02214 #] flint::util::simplify_fmpz_poly :
02215 #[ flint::util::fix_sign_fmpz_mpoly_ratfun :
02216 */
02217 inline void flint::util::fix_sign_fmpz_mpoly_ratfun(fmpz_mpoly_t num, fmpz_mpoly_t den,
02218     const fmpz_mpoly_ctx_t ctx) {
02219     // Fix sign to align with poly: the leading denominator term should have a positive coeff
02220     if ( fmpz_sgn(fmpz_mpoly_term_coeff_ref(den, 0, ctx)) == -1 ) {
02221         fmpz_mpoly_neg(num, num, ctx);
02222         fmpz_mpoly_neg(den, den, ctx);
02223     }
02224 }
02225 /*
02226 #] flint::util::fix_sign_fmpz_mpoly_ratfun :
02227 #[ flint::util::fix_sign_fmpz_poly_ratfun :
02228 */
02229 inline void flint::util::fix_sign_fmpz_poly_ratfun(fmpz_poly_t num, fmpz_poly_t den) {
02230     // Fix sign to align with poly: the leading denominator term should have a positive coeff
02231     if ( fmpz_sgn(fmpz_poly_get_coeff_ptr(den, fmpz_poly_degree(den))) == -1 ) {
02232         fmpz_poly_neg(num, num);
02233         fmpz_poly_neg(den, den);
02234     }
02235 }
02236 /*
02237 #] flint::util::fix_sign_fmpz_poly_ratfun :
02238 */

```


Functions

- void [flint::cleanup](#) (void)
- void [flint::cleanup_master](#) (void)
- WORD * [flint::divmod_mpoly](#) (PHEAD const WORD *, const WORD *, const bool, const WORD, const var_map_t &)
- WORD * [flint::divmod_poly](#) (PHEAD const WORD *, const WORD *, const bool, const WORD, const var_map_t &)
- WORD * [flint::factorize_mpoly](#) (PHEAD const WORD *, WORD *, const bool, const bool, const var_map_t &)
- WORD * [flint::factorize_poly](#) (PHEAD const WORD *, WORD *, const bool, const bool, const var_map_t &)
- void [flint::form_sort](#) (PHEAD WORD *)
- uint64_t [flint::from_argument_mpoly](#) (fmpz_mpoly_t, fmpz_mpoly_t, const WORD *, const bool, const var_map_t &, const fmpz_mpoly_ctx_t)
- uint64_t [flint::from_argument_poly](#) (fmpz_poly_t, fmpz_poly_t, const WORD *, const bool)
- WORD [flint::fmpz_get_form](#) (fmpz_t, WORD *)
- void [flint::fmpz_set_form](#) (fmpz_t, UWORD *, WORD)
- WORD * [flint::gcd_mpoly](#) (PHEAD const WORD *, const WORD *, const WORD, const var_map_t &)
- WORD * [flint::gcd_poly](#) (PHEAD const WORD *, const WORD *, const WORD, const var_map_t &)
- var_map_t [flint::get_variables](#) (const vector< WORD * > &, const bool, const bool)
- WORD * [flint::inverse_poly](#) (PHEAD const WORD *, const WORD *, const var_map_t &)
- WORD * [flint::mul_mpoly](#) (PHEAD const WORD *, const WORD *, const var_map_t &)
- WORD * [flint::mul_poly](#) (PHEAD const WORD *, const WORD *, const var_map_t &)
- void [flint::ratfun_add_mpoly](#) (PHEAD const WORD *, const WORD *, WORD *, const var_map_t &)
- void [flint::ratfun_add_poly](#) (PHEAD const WORD *, const WORD *, WORD *, const var_map_t &)
- void [flint::ratfun_normalize_mpoly](#) (PHEAD WORD *, const var_map_t &)
- void [flint::ratfun_normalize_poly](#) (PHEAD WORD *, const var_map_t &)
- void [flint::ratfun_read_mpoly](#) (const WORD *, fmpz_mpoly_t, fmpz_mpoly_t, const var_map_t &, fmpz_mpoly_ctx_t)
- void [flint::ratfun_read_poly](#) (const WORD *, fmpz_poly_t, fmpz_poly_t)
- uint64_t [flint::to_argument_mpoly](#) (PHEAD WORD *, const bool, const bool, const bool, const uint64_t, const fmpz_mpoly_t, const var_map_t &, const fmpz_mpoly_ctx_t)
- uint64_t [flint::to_argument_poly](#) (PHEAD WORD *, const bool, const bool, const bool, const uint64_t, const fmpz_mpoly_t, const var_map_t &, const fmpz_mpoly_ctx_t, const fmpz_t)
- uint64_t [flint::to_argument_poly](#) (PHEAD WORD *, const bool, const bool, const bool, const uint64_t, const fmpz_poly_t, const var_map_t &)
- uint64_t [flint::to_argument_poly](#) (PHEAD WORD *, const bool, const bool, const bool, const uint64_t, const fmpz_poly_t, const var_map_t &, const fmpz_t)
- void [flint::util::simplify_fmpz](#) (fmpz_t, fmpz_t, fmpz_t)
- void [flint::util::simplify_fmpz_poly](#) (fmpz_poly_t, fmpz_poly_t, fmpz_poly_t)
- void [flint::util::fix_sign_fmpz_mpoly_ratfun](#) (fmpz_mpoly_t, fmpz_mpoly_t, const fmpz_mpoly_ctx_t)
- void [flint::util::fix_sign_fmpz_poly_ratfun](#) (fmpz_poly_t, fmpz_poly_t)

4.41.1 Detailed Description

Prototypes for functions in [flintinterface.cc](#)

Definition in file [flintinterface.h](#).

4.41.2 Typedef Documentation

4.41.2.1 var_map_t

```
typedef std::map<uint32_t,uint32_t> flint::var_map_t
```

Definition at line 76 of file [flintinterface.h](#).

4.41.3 Function Documentation

4.41.3.1 cleanup()

```
void flint::cleanup (
    void )
```

Definition at line 76 of file [flintinterface.cc](#).

4.41.3.2 cleanup_master()

```
void flint::cleanup_master (
    void )
```

Definition at line 83 of file [flintinterface.cc](#).

4.41.3.3 divmod_mpoly()

```
WORD * flint::divmod_mpoly (
    PHEAD const WORD * a,
    const WORD * b,
    const bool return_rem,
    const WORD must_fit_term,
    const var_map_t & var_map )
```

Definition at line 91 of file [flintinterface.cc](#).

4.41.3.4 divmod_poly()

```
WORD * flint::divmod_poly (
    PHEAD const WORD * a,
    const WORD * b,
    const bool return_rem,
    const WORD must_fit_term,
    const var_map_t & var_map )
```

Definition at line 161 of file [flintinterface.cc](#).

4.41.3.5 factorize_mpoly()

```
WORD * flint::factorize_mpoly (
    PHEAD const WORD * argin,
    WORD * argout,
    const bool with_arghead,
    const bool is_fun_arg,
    const var_map_t & var_map )
```

Definition at line 235 of file [flintinterface.cc](#).

4.41.3.6 factorize_poly()

```
WORD * flint::factorize_poly (
    PHEAD const WORD * argin,
    WORD * argout,
    const bool with_arghead,
    const bool is_fun_arg,
    const var_map_t & var_map )
```

Definition at line 383 of file [flintinterface.cc](#).

4.41.3.7 form_sort()

```
void flint::form_sort (
    PHEAD WORD * terms )
```

Definition at line 456 of file [flintinterface.cc](#).

4.41.3.8 from_argument_mpoly()

```
uint64_t flint::from_argument_mpoly (
    fmpz_mpoly_t poly,
    fmpz_mpoly_t denpoly,
    const WORD * args,
    const bool with_arghead,
    const var_map_t & var_map,
    const fmpz_mpoly_ctx_t ctx )
```

Definition at line 511 of file [flintinterface.cc](#).

4.41.3.9 from_argument_poly()

```
uint64_t flint::from_argument_poly (
    fmpz_poly_t poly,
    fmpz_poly_t denpoly,
    const WORD * args,
    const bool with_arghead )
```

Definition at line 654 of file [flintinterface.cc](#).

4.41.3.10 fmpz_get_form()

```
WORD flint::fmpz_get_form (
    fmpz_t z,
    WORD * a )
```

Definition at line 784 of file [flintinterface.cc](#).

4.41.3.11 fmpz_set_form()

```
void flint::fmpz_set_form (
    fmpz_t z,
    UWORD * a,
    WORD na )
```

Definition at line 849 of file [flintinterface.cc](#).

4.41.3.12 gcd_mpoly()

```
WORD * flint::gcd_mpoly (
    PHEAD const WORD * a,
    const WORD * b,
    const WORD must_fit_term,
    const var_map_t & var_map )
```

Definition at line 915 of file [flintinterface.cc](#).

4.41.3.13 gcd_poly()

```
WORD * flint::gcd_poly (
    PHEAD const WORD * a,
    const WORD * b,
    const WORD must_fit_term,
    const var_map_t & var_map )
```

Definition at line 1011 of file [flintinterface.cc](#).

4.41.3.14 get_variables()

```
flint::var_map_t flint::get_variables (
    const vector< WORD * > & es,
    const bool with_arghead,
    const bool sort_vars )
```

Definition at line 1093 of file [flintinterface.cc](#).

4.41.3.15 inverse_poly()

```
WORD * flint::inverse_poly (
    PHEAD const WORD * a,
    const WORD * b,
    const var_map_t & var_map )
```

Definition at line 1210 of file [flintinterface.cc](#).

4.41.3.16 mul_mpoly()

```
WORD * flint::mul_mpoly (
    PHEAD const WORD * a,
    const WORD * b,
    const var_map_t & var_map )
```

Definition at line 1286 of file [flintinterface.cc](#).

4.41.3.17 mul_poly()

```
WORD * flint::mul_poly (
    PHEAD const WORD * a,
    const WORD * b,
    const var_map_t & var_map )
```

Definition at line 1338 of file [flintinterface.cc](#).

4.41.3.18 ratfun_add_mpoly()

```
void flint::ratfun_add_mpoly (
    PHEAD const WORD * t1,
    const WORD * t2,
    WORD * out,
    const var_map_t & var_map )
```

Definition at line 1389 of file [flintinterface.cc](#).

4.41.3.19 ratfun_add_poly()

```
void flint::ratfun_add_poly (
    PHEAD const WORD * t1,
    const WORD * t2,
    WORD * out,
    const var_map_t & var_map )
```

Definition at line 1441 of file [flintinterface.cc](#).

4.41.3.20 ratfun_normalize_mpoly()

```
void flint::ratfun_normalize_mpoly (
    PHEAD WORD * term,
    const var_map_t & var_map )
```

Definition at line 1494 of file [flintinterface.cc](#).

4.41.3.21 `ratfun_normalize_poly()`

```
void flint::ratfun_normalize_poly (
    PHEAD WORD * term,
    const var_map_t & var_map )
```

Definition at line 1577 of file [flintinterface.cc](#).

4.41.3.22 `ratfun_read_mpoly()`

```
void flint::ratfun_read_mpoly (
    const WORD * a,
    fmpz_mpoly_t num,
    fmpz_mpoly_t den,
    const var_map_t & var_map,
    fmpz_mpoly_ctx_t ctx )
```

Definition at line 1660 of file [flintinterface.cc](#).

4.41.3.23 `ratfun_read_poly()`

```
void flint::ratfun_read_poly (
    const WORD * a,
    fmpz_poly_t num,
    fmpz_poly_t den )
```

Definition at line 1718 of file [flintinterface.cc](#).

4.41.3.24 `to_argument_mpoly()` [1/2]

```
uint64_t flint::to_argument_mpoly (
    PHEAD WORD * out,
    const bool with_arghead,
    const bool must_fit_term,
    const bool write,
    const uint64_t prev_size,
    const fmpz_mpoly_t poly,
    const var_map_t & var_map,
    const fmpz_mpoly_ctx_t ctx )
```

Definition at line 1976 of file [flintinterface.cc](#).

4.41.3.25 `to_argument_mpoly()` [2/2]

```
uint64_t flint::to_argument_mpoly (
    PHEAD WORD * out,
    const bool with_arghead,
    const bool must_fit_term,
    const bool write,
    const uint64_t prev_size,
    const fmpz_mpoly_t poly,
    const var_map_t & var_map,
    const fmpz_mpoly_ctx_t ctx,
    const fmpz_t denscale )
```

Definition at line 1780 of file [flintinterface.cc](#).

4.41.3.26 to_argument_poly() [1/2]

```
uint64_t flint::to_argument_poly (
    PHEAD WORD * out,
    const bool with_arghead,
    const bool must_fit_term,
    const bool write,
    const uint64_t prev_size,
    const fmpz_poly_t poly,
    const var_map_t & var_map )
```

Definition at line [2167](#) of file [flintinterface.cc](#).

4.41.3.27 to_argument_poly() [2/2]

```
uint64_t flint::to_argument_poly (
    PHEAD WORD * out,
    const bool with_arghead,
    const bool must_fit_term,
    const bool write,
    const uint64_t prev_size,
    const fmpz_poly_t poly,
    const var_map_t & var_map,
    const fmpz_t denscale )
```

Definition at line [1998](#) of file [flintinterface.cc](#).

4.41.3.28 simplify_fmpz()

```
void flint::util::simplify_fmpz (
    fmpz_t num,
    fmpz_t den,
    fmpz_t gcd ) [inline]
```

Definition at line [2188](#) of file [flintinterface.cc](#).

4.41.3.29 simplify_fmpz_poly()

```
void flint::util::simplify_fmpz_poly (
    fmpz_poly_t num,
    fmpz_poly_t den,
    fmpz_poly_t gcd ) [inline]
```

Definition at line [2200](#) of file [flintinterface.cc](#).

4.41.3.30 fix_sign_fmpz_mpoly_ratfun()

```
void flint::util::fix_sign_fmpz_mpoly_ratfun (
    fmpz_mpoly_t num,
    fmpz_mpoly_t den,
    const fmpz_mpoly_ctx_t ctx ) [inline]
```

Definition at line [2217](#) of file [flintinterface.cc](#).

4.41.3.31 fix_sign_fmpz_poly_ratfun()

```
void flint::util::fix_sign_fmpz_poly_ratfun (
    fmpz_poly_t num,
    fmpz_poly_t den ) [inline]
```

Definition at line 2229 of file [flintinterface.cc](#).

4.42 flintinterface.h

[Go to the documentation of this file.](#)

```
00001 #pragma once
00006 /* #[] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032
00033 extern "C" {
00034 #include "form3.h"
00035 }
00036
00037 #if defined(WINDOWS)
00038 // flint.h defines WORD(xx), which conflicts with the one defined in form3.h.
00039 #undef WORD
00040 #endif
00041
00042 #include <flint/flint.h>
00043 #if __FLINT_RELEASE >= 30000
00044 #include <flint/gr.h>
00045 #endif
00046 #include <flint/fmpz.h>
00047 #include <flint/fmpz_mpoly.h>
00048 #include <flint/fmpz_poly_factor.h>
00049 #include <flint/fmpz_poly.h>
00050 #include <flint/fmpz_poly_factor.h>
00051
00052 #if defined(WINDOWS)
00053 // Redefine WORD here to match form3.h.
00054 #undef WORD
00055 #define WORD FORM_WORD
00056 #endif
00057
00058 #include <cassert>
00059 #include <cstdint>
00060 #include <iostream>
00061 #include <map>
00062 #include <vector>
00063
00064
00065 // The bits of std that are needed:
00066 using std::cout;
00067 using std::endl;
00068 using std::map;
00069 using std::swap;
00070 using std::string;
```

```

00071 using std::vector;
00072
00073
00074 namespace flint {
00075
00076     typedef std::map<uint32_t,uint32_t> var_map_t;
00077
00078     // Small wrappers around the flint structs to enable RAII init and clear. "d" represents the
00079     // data, and this member will be passed to flint functions.
00080     class fmpz {
00081     public:
00082         fmpz_t d;
00083         fmpz() { fmpz_init(d); }
00084         ~fmpz() { fmpz_clear(d); }
00085         void print(const string& text) { cout << text; fmpz_print(d); cout << endl; }
00086     };
00087     class poly {
00088     public:
00089         fmpz_poly_t d;
00090         poly() { fmpz_poly_init(d); }
00091         ~poly() { fmpz_poly_clear(d); }
00092         void print(const string& text) {
00093             cout << text; fmpz_poly_print_pretty(d, "x"); cout << endl;
00094         }
00095     };
00096     class poly_factor {
00097     public:
00098         fmpz_poly_factor_t d;
00099         poly_factor() { fmpz_poly_factor_init(d); }
00100         ~poly_factor() { fmpz_poly_factor_clear(d); }
00101     };
00102     class mpoly {
00103     private:
00104         fmpz_mpoly_ctx_struct *ctx; // We need to keep a copy of the context pointer for clearing.
00105     public:
00106         fmpz_mpoly_t d;
00107         explicit mpoly(fmpz_mpoly_ctx_struct *ctx_in) : ctx(ctx_in) { fmpz_mpoly_init(d, ctx); }
00108         ~mpoly() { fmpz_mpoly_clear(d, ctx); }
00109         void print(const string& text) {
00110             cout << text;
00111             fmpz_mpoly_print_pretty(d, 0, ctx);
00112             cout << endl;
00113         }
00114     };
00115     class mpoly_factor {
00116     private:
00117         fmpz_mpoly_ctx_struct *ctx; // We need to keep a copy of the context pointer for clearing.
00118     public:
00119         fmpz_mpoly_factor_t d;
00120         explicit mpoly_factor(fmpz_mpoly_ctx_struct *ctx_in) : ctx(ctx_in) {
00121             fmpz_mpoly_factor_init(d, ctx);
00122         }
00123         ~mpoly_factor() { fmpz_mpoly_factor_clear(d, ctx); }
00124     };
00125     class mpoly_ctx {
00126     public:
00127         fmpz_mpoly_ctx_t d;
00128         explicit mpoly_ctx(int64_t nvars) { fmpz_mpoly_ctx_init(d, nvars, ORD_LEX); }
00129         ~mpoly_ctx() { fmpz_mpoly_ctx_clear(d); }
00130     };
00131
00132     void cleanup(void);
00133     void cleanup_master(void);
00134
00135     WORD* divmod_mpoly(PHEAD const WORD *, const WORD *, const bool, const WORD, const var_map_t &);
00136     WORD* divmod_poly(PHEAD const WORD *, const WORD *, const bool, const WORD, const var_map_t &);
00137
00138     WORD* factorize_mpoly(PHEAD const WORD *, WORD *, const bool, const bool, const var_map_t &);
00139     WORD* factorize_poly(PHEAD const WORD *, WORD *, const bool, const bool, const var_map_t &);
00140
00141     void form_sort(PHEAD WORD *);
00142
00143     uint64_t from_argument_mpoly(fmpz_mpoly_t, fmpz_mpoly_t, const WORD *, const bool,
00144         const var_map_t &, const fmpz_mpoly_ctx_t);
00145     uint64_t from_argument_poly(fmpz_poly_t, fmpz_poly_t, const WORD *, const bool);
00146
00147     WORD fmpz_get_form(fmpz_t, WORD *);
00148     void fmpz_set_form(fmpz_t, UWORD *, WORD);
00149
00150     WORD* gcd_mpoly(PHEAD const WORD *, const WORD *, const WORD, const var_map_t &);
00151     WORD* gcd_poly(PHEAD const WORD *, const WORD *, const WORD, const var_map_t &);
00152
00153     var_map_t get_variables(const vector <WORD *> &, const bool, const bool);
00154
00155     WORD* inverse_poly(PHEAD const WORD *, const WORD *, const var_map_t &);
00156
00157     WORD* mul_mpoly(PHEAD const WORD *, const WORD *, const var_map_t &);

```


4.43.1 Detailed Description

Contains functions to call FLINT interface from the rest of FORM.

Definition in file [flintwrap.cc](#).

4.43.2 Function Documentation

4.43.2.1 flint_final_cleanup_thread()

```
void flint_final_cleanup_thread (
    void )
```

Definition at line 43 of file [flintwrap.cc](#).

4.43.2.2 flint_final_cleanup_master()

```
void flint_final_cleanup_master (
    void )
```

Definition at line 50 of file [flintwrap.cc](#).

4.43.2.3 flint_div()

```
WORD * flint_div (
    PHEAD WORD * a,
    WORD * b,
    const WORD must_fit_term )
```

Definition at line 57 of file [flintwrap.cc](#).

4.43.2.4 flint_factorize_argument()

```
int flint_factorize_argument (
    PHEAD WORD * argin,
    WORD * argout )
```

Definition at line 79 of file [flintwrap.cc](#).

4.43.2.5 flint_factorize_dollar()

```
WORD * flint_factorize_dollar (
    PHEAD WORD * argin )
```

Definition at line 100 of file [flintwrap.cc](#).

4.43.2.6 flint_gcd()

```
WORD * flint_gcd (
    PHEAD WORD * a,
    WORD * b,
    const WORD must_fit_term )
```

Definition at line 119 of file [flintwrap.cc](#).

4.43.2.7 flint_inverse()

```
WORD * flint_inverse (
    PHEAD WORD * a,
    WORD * b )
```

Definition at line 140 of file [flintwrap.cc](#).

4.43.2.8 flint_mul()

```
WORD * flint_mul (
    PHEAD WORD * a,
    WORD * b )
```

Definition at line 161 of file [flintwrap.cc](#).

4.43.2.9 flint_ratfun_add()

```
WORD * flint_ratfun_add (
    PHEAD WORD * t1,
    WORD * t2 )
```

Definition at line 180 of file [flintwrap.cc](#).

4.43.2.10 flint_ratfun_normalize()

```
int flint_ratfun_normalize (
    PHEAD WORD * term )
```

Definition at line 219 of file [flintwrap.cc](#).

4.43.2.11 flint_rem()

```
WORD * flint_rem (
    PHEAD WORD * a,
    WORD * b,
    const WORD must_fit_term )
```

Definition at line 292 of file [flintwrap.cc](#).

4.43.2.12 flint_check_version()

```
void flint_check_version (
    void )
```

Checks the FLINT library version at runtime.

This function should be called at startup. The program will terminate if a known buggy version of FLINT is detected.

Definition at line 321 of file [flintwrap.cc](#).

4.44 flintwrap.cc

[Go to the documentation of this file.](#)

```
00001
00005 /* #[] License : */
00006 /*
00007 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 * When using this file you are requested to refer to the publication
00009 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 * This is considered a matter of courtesy as the development was paid
00011 * for by FOM the Dutch physics granting agency and we would like to
00012 * be able to track its scientific use to convince FOM of its value
00013 * for the community.
00014 *
00015 * This file is part of FORM.
00016 *
00017 * FORM is free software: you can redistribute it and/or modify it under the
00018 * terms of the GNU General Public License as published by the Free Software
00019 * Foundation, either version 3 of the License, or (at your option) any later
00020 * version.
00021 *
00022 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 * details.
00026 *
00027 * You should have received a copy of the GNU General Public License along
00028 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[] License : */
00031
00032 extern "C" {
00033 #include "form3.h"
00034 }
00035
00036 #include <sstream>
00037 #include "flintinterface.h"
00038
00039
00040 /*
00041 #[] flint_final_cleanup_thread :
00042 */
00043 void flint_final_cleanup_thread(void) {
00044     flint::cleanup();
00045 }
00046 /*
00047 #[] flint_final_cleanup_thread :
00048 #[] flint_final_cleanup_master :
00049 */
00050 void flint_final_cleanup_master(void) {
00051     flint::cleanup_master();
00052 }
00053 /*
00054 #[] flint_final_cleanup_master :
00055 #[] flint_div :
00056 */
00057 WORD* flint_div(PHEAD WORD *a, WORD *b, const WORD must_fit_term) {
00058     // Extract expressions
00059     vector<WORD *> e;
00060     e.reserve(2);
00061     e.push_back(a);
00062     e.push_back(b);
00063     const bool with_arghead = false;
00064     const bool sort_vars = false;
00065     const flint::var_map_t var_map = flint::get_variables(e, with_arghead, sort_vars);
```

```

00066
00067     const bool return_rem = false;
00068     if ( var_map.size() > 1 ) {
00069         return flint::divmod_mpoly(BHEAD a, b, return_rem, must_fit_term, var_map);
00070     }
00071     else {
00072         return flint::divmod_poly(BHEAD a, b, return_rem, must_fit_term, var_map);
00073     }
00074 }
00075 /*
00076     #] flint_div :
00077     #[ flint_factorize_argument :
00078 */
00079 int flint_factorize_argument(PHEAD WORD *argin, WORD *argout) {
00080
00081     const bool with_arghead = true;
00082     const bool sort_vars = true;
00083     const flint::var_map_t var_map = flint::get_variables(vector<WORD*>(1,argin), with_arghead,
00084         sort_vars);
00085
00086     const bool is_fun_arg = true;
00087     if ( var_map.size() > 1 ) {
00088         flint::factorize_mpoly(BHEAD argin, argout, with_arghead, is_fun_arg, var_map);
00089     }
00090     else {
00091         flint::factorize_poly(BHEAD argin, argout, with_arghead, is_fun_arg, var_map);
00092     }
00093
00094     return 0;
00095 }
00096 /*
00097     #] flint_factorize_argument :
00098     #[ flint_factorize_dollar :
00099 */
00100 WORD* flint_factorize_dollar(PHEAD WORD *argin) {
00101
00102     const bool with_arghead = false;
00103     const bool sort_vars = true;
00104     const flint::var_map_t var_map = flint::get_variables(vector<WORD*>(1,argin), with_arghead,
00105         sort_vars);
00106
00107     const bool is_fun_arg = false;
00108     if ( var_map.size() > 1 ) {
00109         return flint::factorize_mpoly(BHEAD argin, NULL, with_arghead, is_fun_arg, var_map);
00110     }
00111     else {
00112         return flint::factorize_poly(BHEAD argin, NULL, with_arghead, is_fun_arg, var_map);
00113     }
00114 }
00115 /*
00116     #] flint_factorize_dollar :
00117     #[ flint_gcd :
00118 */
00119 WORD* flint_gcd(PHEAD WORD *a, WORD *b, const WORD must_fit_term) {
00120     // Extract expressions
00121     vector<WORD *> e;
00122     e.reserve(2);
00123     e.push_back(a);
00124     e.push_back(b);
00125     const bool with_arghead = false;
00126     const bool sort_vars = true;
00127     const flint::var_map_t var_map = flint::get_variables(e, with_arghead, sort_vars);
00128
00129     if ( var_map.size() > 1 ) {
00130         return flint::gcd_mpoly(BHEAD a, b, must_fit_term, var_map);
00131     }
00132     else {
00133         return flint::gcd_poly(BHEAD a, b, must_fit_term, var_map);
00134     }
00135 }
00136 /*
00137     #] flint_gcd :
00138     #[ flint_inverse :
00139 */
00140 WORD* flint_inverse(PHEAD WORD *a, WORD *b) {
00141     // Extract expressions
00142     vector<WORD *> e;
00143     e.reserve(2);
00144     e.push_back(a);
00145     e.push_back(b);
00146     const flint::var_map_t var_map = flint::get_variables(e, false, false);
00147
00148     if ( var_map.size() > 1 ) {
00149         MLOCK(ErrorMessageLock);
00150         MesPrint("flint_inverse: error: only univariate polynomials are supported.");
00151         MUNLOCK(ErrorMessageLock);
00152         Terminate(-1);

```

```

00153     }
00154
00155     return flint::inverse_poly(BHEAD a, b, var_map);
00156 }
00157 /*
00158     #] flint_inverse :
00159     #[ flint_mul :
00160 */
00161 WORD* flint_mul(PHEAD WORD *a, WORD *b) {
00162     // Extract expressions
00163     vector<WORD *> e;
00164     e.reserve(2);
00165     e.push_back(a);
00166     e.push_back(b);
00167     const flint::var_map_t var_map = flint::get_variables(e, false, false);
00168
00169     if ( var_map.size() > 1 ) {
00170         return flint::mul_mpoly(BHEAD a, b, var_map);
00171     }
00172     else {
00173         return flint::mul_poly(BHEAD a, b, var_map);
00174     }
00175 }
00176 /*
00177     #] flint_mul :
00178     #[ flint_ratfun_add :
00179 */
00180 WORD* flint_ratfun_add(PHEAD WORD *t1, WORD *t2) {
00181
00182     if ( AR.PolyFunExp == 1 ) {
00183         MLOCK(ErrorMessageLock);
00184         MesPrint("flint_ratfun_add: PolyFunExp unimplemented.");
00185         MUNLOCK(ErrorMessageLock);
00186         Terminate(-1);
00187     }
00188
00189     WORD *oldworkpointer = AT.WorkPointer;
00190
00191     // Extract expressions: the num and den of both prf
00192     vector<WORD *> e;
00193     e.reserve(4);
00194     for (WORD *t=t1+FUNHEAD; t<t1+t1[1];) {
00195         e.push_back(t);
00196         NEXTARG(t);
00197     }
00198     for (WORD *t=t2+FUNHEAD; t<t2+t2[1];) {
00199         e.push_back(t);
00200         NEXTARG(t);
00201     }
00202     const bool with_arghead = true;
00203     const bool sort_vars = true;
00204     const flint::var_map_t var_map = flint::get_variables(e, with_arghead, sort_vars);
00205
00206     if ( var_map.size() > 1 ) {
00207         flint::ratfun_add_mpoly(BHEAD t1, t2, oldworkpointer, var_map);
00208     }
00209     else {
00210         flint::ratfun_add_poly(BHEAD t1, t2, oldworkpointer, var_map);
00211     }
00212
00213     return oldworkpointer;
00214 }
00215 /*
00216     #] flint_ratfun_add :
00217     #[ flint_ratfun_normalize :
00218 */
00219 int flint_ratfun_normalize(PHEAD WORD *term) {
00220
00221     // The length of the coefficient
00222     const WORD ncoeff = (term + *term)[-1];
00223     // The end of the term data, before the coefficient:
00224     const WORD *tstop = term + *term - ABS(ncoeff);
00225
00226     // Search the term for multiple PolyFun or one dirty one.
00227     unsigned num_polyratfun = 0;
00228     for (WORD *t = term+1; t < tstop; t += t[1]) {
00229         if (*t == AR.PolyFun) {
00230             // Found one!
00231             num_polyratfun++;
00232             if ((t[2] & MUSTCLEANPRF) != 0) {
00233                 // Dirty, increment again to force normalisation for single PolyFun
00234                 num_polyratfun++;
00235             }
00236         }
00237         if (num_polyratfun > 1) {
00238             // We're not counting all occurrences, just determining if there
00239             // is something to be done.
00240             break;
00241         }
00242     }

```

```

00240         }
00241     }
00242 }
00243 if (num_polyratfun <= 1) {
00244     // There is nothing to do, return early
00245     return 0;
00246 }
00247
00248 // When there are polyratfun with only one argument: rename them temporarily to TMPPOLYFUN.
00249 for (WORD *t = term+1; t < tstop; t += t[1]) {
00250     if (*t == AR.PolyFun && (t[1] == FUNHEAD+t[FUNHEAD] || t[1] == FUNHEAD+2 ) ) {
00251         *t = TMPPOLYFUN;
00252     }
00253 }
00254
00255 // Extract all variables in the polyfuns
00256 // Collect pointers to each relevant argument
00257 vector<WORD *> e;
00258 e.reserve(4); // There could be more than 4 args in principle, but 4 is probably common.
00259 for (WORD *t=term+1; t<tstop; t+=t[1]) {
00260     if (*t == AR.PolyFun) {
00261         for (WORD *t2 = t+FUNHEAD; t2<t+t[1];) {
00262             e.push_back(t2);
00263             NEXTARG(t2);
00264         }
00265     }
00266 }
00267
00268 const bool with_arghead = true;
00269 const bool sort_vars = true;
00270 const flint::var_map_t var_map = flint::get_variables(e, with_arghead, sort_vars);
00271
00272 if ( var_map.size() > 1 ) {
00273     flint::ratfun_normalize_mpoly(BHEAD term, var_map);
00274 }
00275 else {
00276     flint::ratfun_normalize_poly(BHEAD term, var_map);
00277 }
00278
00279 // Undo renaming of single-argument PolyFun
00280 const WORD *new_tstop = term + *term - ABS((term + *term)[-1]);
00281 for (WORD *t=term+1; t<new_tstop; t+=t[1]) {
00282     if (*t == TMPPOLYFUN ) *t = AR.PolyFun;
00283 }
00284
00285 return 0;
00286 }
00287
00288 /*
00289 #] flint_ratfun_normalize :
00290 #[ flint_rem :
00291 */
00292 WORD* flint_rem(PHEAD WORD *a, WORD *b, const WORD must_fit_term) {
00293     // Extract expressions
00294     vector<WORD *> e;
00295     e.reserve(2);
00296     e.push_back(a);
00297     e.push_back(b);
00298     const bool with_arghead = false;
00299     const bool sort_vars = false;
00300     const flint::var_map_t var_map = flint::get_variables(e, with_arghead, sort_vars);
00301
00302     const bool return_rem = true;
00303     if ( var_map.size() > 1 ) {
00304         return flint::divmod_mpoly(BHEAD a, b, return_rem, must_fit_term, var_map);
00305     }
00306     else {
00307         return flint::divmod_poly(BHEAD a, b, return_rem, must_fit_term, var_map);
00308     }
00309 }
00310 /*
00311 #] flint_rem :
00312 #[ flint_check_version :
00313 */
00314
00321 void flint_check_version(void) {
00322     bool ok = true;
00323     std::stringstream ss(flint_version);
00324     int major, minor, patch;
00325     char dot1, dot2;
00326     if ( ss » major » dot1 » minor » dot2 » patch ) {
00327         if ( dot1 != '.' || dot2 != '.' || major < 0 || minor < 0 || patch < 0 ) {
00328             ok = false;
00329         }
00330         else if ( major * 10000 + minor * 100 + patch < 30200 ) {
00331             // flint < 3.2.0: https://github.com/form-dev/form/issues/679
00332             ok = false;

```

```

00333     }
00334 }
00335 else {
00336     ok = false;
00337 }
00338 if ( !ok ) {
00339     MesPrint("Bad FLINT version detected at runtime: %s", flint_version);
00340     Terminate(-2);
00341 }
00342 }
00343
00344 /*
00345  #] flint_check_version :
00346  */

```


4.45 float.c File Reference

```

#include "form3.h"
#include <math.h>
#include <gmp.h>

```

Include dependency graph for float.c:

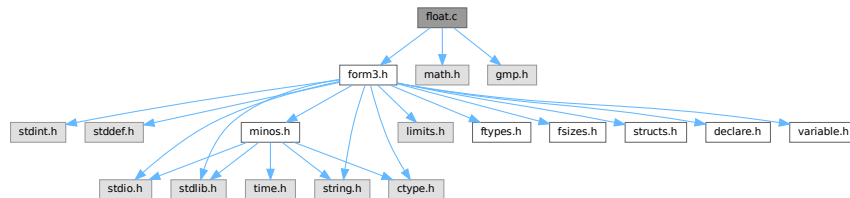

Macros

- `#define WITHCUTOFF`
- `#define GMPSPREAD (GMP_LIMB_BITS/BITSINWORD)`

Functions

- void [Form_mpf_init](#) (mpf_t t)
- void [Form_mpf_clear](#) (mpf_t t)
- void [Form_mpf_set_prec_raw](#) (mpf_t t, ULONG newprec)
- void [FormtoZ](#) (mpz_t z, UWORD *a, WORD na)
- void [ZtoForm](#) (UWORD *a, WORD *na, mpz_t z)
- long [FloatToInteger](#) (UWORD *out, mpf_t floatin, long *bitsused)
- void [IntegerToFloat](#) (mpf_t result, UWORD *formlong, int longsize)
- int [FloatToRat](#) (UWORD *ratout, WORD *nratout, mpf_t floatin)
- int [AddFloats](#) (PHEAD WORD *fun3, WORD *fun1, WORD *fun2)
- int [MulFloats](#) (PHEAD WORD *fun3, WORD *fun1, WORD *fun2)
- int [DivFloats](#) (PHEAD WORD *fun3, WORD *fun1, WORD *fun2)
- int [AddRatToFloat](#) (PHEAD WORD *outfun, WORD *infun, UWORD *formrat, WORD nrat)
- int [MulRatToFloat](#) (PHEAD WORD *outfun, WORD *infun, UWORD *formrat, WORD nrat)
- void [SimpleDelta](#) (mpf_t sum, int m)
- void [SimpleDeltaC](#) (mpf_t sum, int m)
- void [SingleTable](#) (mpf_t *tabl, int N, int m, int pow)
- void [DoubleTable](#) (mpf_t *tabout, mpf_t *tabin, int N, int m, int pow)

- void [EndTable](#) (mpf_t sum, mpf_t *tabin, int N, int m, int pow)
- void [deltaMZV](#) (mpf_t, WORD *, int)
- void [deltaEuler](#) (mpf_t, WORD *, int)
- void [deltaEulerC](#) (mpf_t, WORD *, int)
- void [CalculateMZVhalf](#) (mpf_t, WORD *, int)
- void [CalculateMZV](#) (mpf_t, WORD *, int)
- void [CalculateEuler](#) (mpf_t, WORD *, int)
- int [ExpandMZV](#) (WORD *term, WORD level)
- int [ExpandEuler](#) (WORD *term, WORD level)
- int [PackFloat](#) (WORD *, mpf_t)
- int [UnpackFloat](#) (mpf_t, WORD *)
- void [RatToFloat](#) (mpf_t result, UWORD *format, int ratsize)
- void [Form_mpf_empty](#) (mpf_t t)
- int [TestFloat](#) (WORD *fun)
- WORD [FloatFunToRat](#) (PHEAD UWORD *ratout, WORD *in)
- void [ZeroTable](#) (mpf_t *tab, int N)
- SBYTE * [ReadFloat](#) (SBYTE *s)
- UBYTE * [CheckFloat](#) (UBYTE *ss, int *spec)
- int [SetFloatPrecision](#) (WORD prec)
- int [PrintFloat](#) (WORD *fun, int numdigits)
- void [SetupMZVTables](#) (void)
- void [SetupMPFTables](#) (void)
- void [ClearMZVTables](#) (void)
- int [CoToFloat](#) (UBYTE *s)
- int [CoToRat](#) (UBYTE *s)
- int [CoStrictRounding](#) (UBYTE *s)
- int [CoChop](#) (UBYTE *s)
- int [ToFloat](#) (PHEAD WORD *term, WORD level)
- int [ToRat](#) (PHEAD WORD *term, WORD level)
- int [StrictRounding](#) (PHEAD WORD *term, WORD level, WORD prec, WORD base)
- int [Chop](#) (PHEAD WORD *term, WORD level)
- int [AddWithFloat](#) (PHEAD WORD **ps1, WORD **ps2)
- int [MergeWithFloat](#) (PHEAD WORD **interm1, WORD **interm2)
- int [EvaluateEuler](#) (PHEAD WORD *term, WORD level, WORD par)
- int [CoEvaluate](#) (UBYTE *s)

4.45.1 Detailed Description

This file contains numerical routines that deal with floating point numbers. We use the GMP for arbitrary precision floating point arithmetic. The functions of the type sin, cos, ln, sqrt etc are handled by the mpfr library. The reason that for MZV's and the general notation we use the GMP (mpf_) is because the contents of the structs have been frozen and can be used for storage in a Form function float_. With mpfr_ this is not safely possible. All mpfr_ related code is in the file [evaluate.c](#).

Definition in file [float.c](#).

4.45.2 Macro Definition Documentation

4.45.2.1 WITHCUTOFF

```
#define WITHCUTOFF
```

Definition at line 45 of file [float.c](#).

4.45.2.2 GMPSPREAD

```
#define GMPSPREAD (GMP_LIMB_BITS/BITSINWORD)
```

Definition at line 47 of file [float.c](#).

4.45.3 Function Documentation

4.45.3.1 Form_mpf_init()

```
void Form_mpf_init (  
    mpf_t t )
```

Definition at line 177 of file [float.c](#).

4.45.3.2 Form_mpf_clear()

```
void Form_mpf_clear (  
    mpf_t t )
```

Definition at line 201 of file [float.c](#).

4.45.3.3 Form_mpf_set_prec_raw()

```
void Form_mpf_set_prec_raw (  
    mpf_t t,  
    ULONG newprec )
```

Definition at line 227 of file [float.c](#).

4.45.3.4 FormtoZ()

```
void FormtoZ (  
    mpz_t z,  
    UWORD * a,  
    WORD na )
```

Definition at line 513 of file [float.c](#).

4.45.3.5 ZtoForm()

```
void ZtoForm (  
    UWORD * a,  
    WORD * na,  
    mpz_t z )
```

Definition at line 557 of file [float.c](#).

4.45.3.6 FloatToInteger()

```
long FloatToInteger (
    UWORD * out,
    mpf_t floatin,
    long * bitsused )
```

Definition at line 583 of file [float.c](#).

4.45.3.7 IntegerToFloat()

```
void IntegerToFloat (
    mpf_t result,
    UWORD * formlong,
    int longsize )
```

Definition at line 606 of file [float.c](#).

4.45.3.8 FloatToRat()

```
int FloatToRat (
    UWORD * ratout,
    WORD * nratout,
    mpf_t floatin )
```

Definition at line 670 of file [float.c](#).

4.45.3.9 AddFloats()

```
int AddFloats (
    PHEAD WORD * fun3,
    WORD * fun1,
    WORD * fun2 )
```

Definition at line 988 of file [float.c](#).

4.45.3.10 MulFloats()

```
int MulFloats (
    PHEAD WORD * fun3,
    WORD * fun1,
    WORD * fun2 )
```

Definition at line 1004 of file [float.c](#).

4.45.3.11 DivFloats()

```
int DivFloats (
    PHEAD WORD * fun3,
    WORD * fun1,
    WORD * fun2 )
```

Definition at line 1020 of file [float.c](#).

4.45.3.12 AddRatToFloat()

```
int AddRatToFloat (
    PHEAD WORD * outfun,
    WORD * infun,
    UWORD * formrat,
    WORD nrat )
```

Definition at line [1038](#) of file [float.c](#).

4.45.3.13 MulRatToFloat()

```
int MulRatToFloat (
    PHEAD WORD * outfun,
    WORD * infun,
    UWORD * formrat,
    WORD nrat )
```

Definition at line [1057](#) of file [float.c](#).

4.45.3.14 SimpleDelta()

```
void SimpleDelta (
    mpf_t sum,
    int m )
```

Definition at line [1869](#) of file [float.c](#).

4.45.3.15 SimpleDeltaC()

```
void SimpleDeltaC (
    mpf_t sum,
    int m )
```

Definition at line [1928](#) of file [float.c](#).

4.45.3.16 SingleTable()

```
void SingleTable (
    mpf_t * tabl,
    int N,
    int m,
    int pow )
```

Definition at line [1987](#) of file [float.c](#).

4.45.3.17 DoubleTable()

```
void DoubleTable (
    mpf_t * tabout,
    mpf_t * tabin,
    int N,
    int m,
    int pow )
```

Definition at line 2039 of file [float.c](#).

4.45.3.18 EndTable()

```
void EndTable (
    mpf_t sum,
    mpf_t * tabin,
    int N,
    int m,
    int pow )
```

Definition at line 2090 of file [float.c](#).

4.45.3.19 deltaMZV()

```
void deltaMZV (
    mpf_t result,
    WORD * indexes,
    int depth )
```

Definition at line 2135 of file [float.c](#).

4.45.3.20 deltaEuler()

```
void deltaEuler (
    mpf_t result,
    WORD * indexes,
    int depth )
```

Definition at line 2202 of file [float.c](#).

4.45.3.21 deltaEulerC()

```
void deltaEulerC (
    mpf_t result,
    WORD * indexes,
    int depth )
```

Definition at line 2258 of file [float.c](#).

4.45.3.22 CalculateMZVhalf()

```
void CalculateMZVhalf (
    mpf_t result,
    WORD * indexes,
    int depth )
```

Definition at line [2331](#) of file [float.c](#).

4.45.3.23 CalculateMZV()

```
void CalculateMZV (
    mpf_t result,
    WORD * indexes,
    int depth )
```

Definition at line [2352](#) of file [float.c](#).

4.45.3.24 CalculateEuler()

```
void CalculateEuler (
    mpf_t result,
    WORD * Zindexes,
    int depth )
```

Definition at line [2417](#) of file [float.c](#).

4.45.3.25 ExpandMZV()

```
int ExpandMZV (
    WORD * term,
    WORD level )
```

Definition at line [2493](#) of file [float.c](#).

4.45.3.26 ExpandEuler()

```
int ExpandEuler (
    WORD * term,
    WORD level )
```

Definition at line [2505](#) of file [float.c](#).

4.45.3.27 PackFloat()

```
int PackFloat (
    WORD * fun,
    mpf_t infloat )
```

Definition at line [271](#) of file [float.c](#).

4.45.3.28 UnpackFloat()

```
int UnpackFloat (
    mpf_t outfloat,
    WORD * fun )
```

Definition at line [366](#) of file [float.c](#).

4.45.3.29 RatToFloat()

```
void RatToFloat (
    mpf_t result,
    UWORD * formrat,
    int ratsize )
```

Definition at line [622](#) of file [float.c](#).

4.45.3.30 Form_mpf_empty()

```
void Form_mpf_empty (
    mpf_t t )
```

Definition at line [214](#) of file [float.c](#).

4.45.3.31 TestFloat()

```
int TestFloat (
    WORD * fun )
```

Definition at line [454](#) of file [float.c](#).

4.45.3.32 FloatFunToRat()

```
WORD FloatFunToRat (
    PHEAD UWORD * ratout,
    WORD * in )
```

Definition at line [644](#) of file [float.c](#).

4.45.3.33 ZeroTable()

```
void ZeroTable (
    mpf_t * tab,
    int N )
```

Definition at line [806](#) of file [float.c](#).

4.45.3.34 ReadFloat()

```
SBYTE * ReadFloat (
    SBYTE * s )
```

Definition at line 824 of file [float.c](#).

4.45.3.35 CheckFloat()

```
UBYTE * CheckFloat (
    UBYTE * ss,
    int * spec )
```

Definition at line 850 of file [float.c](#).

4.45.3.36 SetFloatPrecision()

```
int SetFloatPrecision (
    WORD prec )
```

Definition at line 903 of file [float.c](#).

4.45.3.37 PrintFloat()

```
int PrintFloat (
    WORD * fun,
    int numdigits )
```

Definition at line 932 of file [float.c](#).

4.45.3.38 SetupMZVTables()

```
void SetupMZVTables (
    void )
```

Definition at line 1074 of file [float.c](#).

4.45.3.39 SetupMPFTables()

```
void SetupMPFTables (
    void )
```

Definition at line 1138 of file [float.c](#).

4.45.3.40 ClearMZVTables()

```
void ClearMZVTables (
    void )
```

Definition at line 1172 of file [float.c](#).

4.45.3.41 CoToFloat()

```
int CoToFloat (
    UBYTE * s )
```

Definition at line 1249 of file [float.c](#).

4.45.3.42 CoToRat()

```
int CoToRat (
    UBYTE * s )
```

Definition at line 1271 of file [float.c](#).

4.45.3.43 CoStrictRounding()

```
int CoStrictRounding (
    UBYTE * s )
```

Definition at line 1298 of file [float.c](#).

4.45.3.44 CoChop()

```
int CoChop (
    UBYTE * s )
```

Definition at line 1345 of file [float.c](#).

4.45.3.45 ToFloat()

```
int ToFloat (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1441 of file [float.c](#).

4.45.3.46 ToRat()

```
int ToRat (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1473 of file [float.c](#).

4.45.3.47 StrictRounding()

```
int StrictRounding (
    PHEAD WORD * term,
    WORD level,
    WORD prec,
    WORD base )
```

Definition at line 1509 of file [float.c](#).

4.45.3.48 Chop()

```
int Chop (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1571 of file [float.c](#).

4.45.3.49 AddWithFloat()

```
int AddWithFloat (
    PHEAD WORD ** ps1,
    WORD ** ps2 )
```

Definition at line 1640 of file [float.c](#).

4.45.3.50 MergeWithFloat()

```
int MergeWithFloat (
    PHEAD WORD ** interm1,
    WORD ** interm2 )
```

Definition at line 1758 of file [float.c](#).

4.45.3.51 EvaluateEuler()

```
int EvaluateEuler (
    PHEAD WORD * term,
    WORD level,
    WORD par )
```

Definition at line 2533 of file [float.c](#).

4.45.3.52 CoEvaluate()

```
int CoEvaluate (
    UBYTE * s )
```

Definition at line 2651 of file [float.c](#).

4.46 float.c

[Go to the documentation of this file.](#)

```

00001
00011 /* #[] License : */
00012 /*
00013 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00014 *   When using this file you are requested to refer to the publication
00015 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00016 *   This is considered a matter of courtesy as the development was paid
00017 *   for by FOM the Dutch physics granting agency and we would like to
00018 *   be able to track its scientific use to convince FOM of its value
00019 *   for the community.
00020 *
00021 *   This file is part of FORM.
00022 *
00023 *   FORM is free software: you can redistribute it and/or modify it under the
00024 *   terms of the GNU General Public License as published by the Free Software
00025 *   Foundation, either version 3 of the License, or (at your option) any later
00026 *   version.
00027 *
00028 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00029 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00030 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00031 *   details.
00032 *
00033 *   You should have received a copy of the GNU General Public License along
00034 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00035 */
00036 /* #[] License : */
00037 /*
00038 *   #[] Includes : float.c
00039 */
00040
00041 #include "form3.h"
00042 #include <math.h>
00043 #include <gmp.h>
00044
00045 #define WITHCUTOFF
00046
00047 #define GMPSPREAD (GMP_LIMB_BITS/BITSINWORD)
00048
00049
00050 void Form_mpf_init(mpf_t t);
00051 void Form_mpf_clear(mpf_t t);
00052 void Form_mpf_set_prec_raw(mpf_t t, ULONG newprec);
00053 void FormtoZ(mpz_t z, UWORD *a, WORD na);
00054 void ZtoForm(UWORD *a, WORD *na, mpz_t z);
00055 long FloatToInteger(UWORD *out, mpf_t floatin, long *bitsused);
00056 void IntegerToFloat(mpf_t result, UWORD *formlong, int longsize);
00057 int FloatToRat(UWORD *ratout, WORD *nratout, mpf_t floatin);
00058 int AddFloats(PHEAD WORD *fun3, WORD *fun1, WORD *fun2);
00059 int MulFloats(PHEAD WORD *fun3, WORD *fun1, WORD *fun2);
00060 int DivFloats(PHEAD WORD *fun3, WORD *fun1, WORD *fun2);
00061 int AddRatToFloat(PHEAD WORD *outfun, WORD *infun, UWORD *formrat, WORD nrat);
00062 int MulRatToFloat(PHEAD WORD *outfun, WORD *infun, UWORD *formrat, WORD nrat);
00063 void SimpleDelta(mpf_t sum, int m);
00064 void SimpleDeltaC(mpf_t sum, int m);
00065 void SingleTable(mpf_t *tabl, int N, int m, int pow);
00066 void DoubleTable(mpf_t *tabout, mpf_t *tabin, int N, int m, int pow);
00067 void EndTable(mpf_t sum, mpf_t *tabin, int N, int m, int pow);
00068 void deltaMZV(mpf_t, WORD *, int);
00069 void deltaEuler(mpf_t, WORD *, int);
00070 void deltaEulerC(mpf_t, WORD *, int);
00071 void CalculateMZVhalf(mpf_t, WORD *, int);
00072 void CalculateMZV(mpf_t, WORD *, int);
00073 void CalculateEuler(mpf_t, WORD *, int);
00074 int ExpandMZV(WORD *term, WORD level);
00075 int ExpandEuler(WORD *term, WORD level);
00076 int PackFloat(WORD *, mpf_t);
00077 int UnpackFloat(mpf_t, WORD *);
00078 void RatToFloat(mpf_t result, UWORD *formrat, int ratsize);
00079
00080 /*
00081 *   #[] Includes :
00082 *   #[] Some GMP float info :
00083 *
00084 *   From gmp.h:
00085 *
00086 *   typedef struct
00087 *   {
00088 *       int _mp_prec;           Max precision, in number of `mp_limb_t's.
00089 *                               Set by mpf_init and modified by
00090 *                               mpf_set_prec. The area pointed to by the
00091 *                               _mp_d field contains `prec' + 1 limbs.

```

```

00092     int _mp_size;      abs(_mp_size) is the number of limbs the
00093                        last field points to. If _mp_size is
00094                        negative this is a negative number.
00095     mp_exp_t _mp_exp; Exponent, in the base of 'mp_limb_t'.
00096     mp_limb_t *_mp_d; Pointer to the limbs.
00097 } __mpf_struct;
00098
00099 typedef __mpf_struct mpf_t[1];
00100
00101 Currently:
00102     sizeof(int) = 4
00103     sizeof(mpf_t) = 24
00104     sizeof(mp_limb_t) = 8,
00105     sizeof(mp_exp_t) = 8,
00106     sizeof a pointer is 8.
00107 If any of this changes in the future we would have to change the
00108 PackFloat and UnpackFloat routines.
00109
00110 Our float_ function is packed with the 4 arguments:
00111     -SNUMBER _mp_prec
00112     -SNUMBER _mp_size
00113     exponent which can be -SNUMBER or a regular term
00114     the limbs as n/1 in regular term format, or just an -SNUMBER.
00115 During normalization the sign is taken away from the second argument
00116 and put as the sign of the complete term. This is easier for the
00117 WriteInnerTerm routine in sch.c
00118
00119 Wildcarding of functions excludes matches with float_
00120 Float_ always ends up inside the bracket, just like poly(rat)fun.
00121
00122 From mpfr.h
00123
00124 The formats here are different. This has, among others, to do with
00125 the rounding. The result is that we need different aux variables
00126 when working with mpfr and we need a different conversion routine
00127 to float. It also means that we need to treat the mvz_ etc functions
00128 completely separately. For now we try to develop that in the file
00129 Evaluate.c. At a later stage we may merge the two files.
00130 Originally we had the sqrt in float.c but it seems better to put
00131 it in Evaluate.c
00132
00133 #] Some GMP float info :
00134 #[ Low Level :
00135
00136     In the low level routines we interact directly with the content
00137     of the GMP structs. This can be done safely, because their
00138     layout is documented. We pay particular attention to the init
00139     and clear routines, because they involve malloc/free calls.
00140
00141     #[ Explanations :
00142
00143 We need a number of facilities inside Form to deal with floating point
00144 numbers, taking into account that they are only meant for sporadic use.
00145 1: We need a special function float_ who's arguments contain a limb
00146    representation of the mpf_t of the gmp.
00147 2: Some functions may return a floating point number. This is then in
00148    the form of an occurrence of the function float_.
00149 3: We need a print routine to print this float_.
00150 4: We need routines for conversions:
00151    a: (long) int to float.
00152    b: rat to float.
00153    c: float to rat (if possible)
00154    d: float to integer (with rounding toward zero).
00155 5: We need calculational operations for add, sub, mul, div, exp.
00156 6: We need service routines to pack and unpack the function float_.
00157 7: The coefficient should be pulled inside float_.
00158 8: Float_ cannot occur inside PolyRatFun.
00159 9: We need to be able to treat float_ as the coefficient during sorting.
00160 10: For now, we need the functions mvzf_ and eulerf_ for the evaluation
00161     of mvz's and euler sums.
00162 11: We need a setting for the default precision.
00163 12: We need a special flag for the dirty field of arguments to avoid
00164     the normalization of the argument with the limbs.
00165     Alternatively, the float_ should be not a regular function, but
00166     get a status < FUNCTION. Just like SNUMBER, LNUMBER etc.
00167
00168 Note that we can keep this thread-safe. The only routine that is not
00169 thread-safe is the print routine, but that is in accordance with all
00170 other print routines in Form. When called from MesPrint it needs to
00171 be protected by a lock, as is done standard inside Form.
00172
00173 #] Explanations :
00174 #[ Form_mpf_init :
00175 */
00176
00177 void Form_mpf_init(mpf_t t)
00178 {

```

```

00179     mp_limb_t *d;
00180     int i, prec;
00181     if ( t->_mp_d ) { M_free(t->_mp_d,"Form_mpf_init"); t->_mp_d = 0; }
00182     prec = (AC.DefaultPrecision + 8*sizeof(mp_limb_t)-1)/(8*sizeof(mp_limb_t)) + 1;
00183     t->_mp_prec = prec;
00184     t->_mp_size = 0;
00185     t->_mp_exp = 0;
00186     d = (mp_limb_t *)Malloc1(prec*sizeof(mp_limb_t),"Form_mpf_init");
00187     if ( d == 0 ) {
00188         MesPrint("Fatal error in Malloc1 call in Form_mpf_init. Trying to allocate %ld bytes.",
00189                 prec*sizeof(mp_limb_t));
00190         Terminate(-1);
00191     }
00192     t->_mp_d = d;
00193     for ( i = 0; i < prec; i++ ) d[i] = 0;
00194 }
00195
00196 /*
00197     #] Form_mpf_init :
00198     #[ Form_mpf_clear :
00199 */
00200
00201 void Form_mpf_clear(mpf_t t)
00202 {
00203     if ( t->_mp_d ) { M_free(t->_mp_d,"Form_mpf_init"); t->_mp_d = 0; }
00204     t->_mp_prec = 0;
00205     t->_mp_size = 0;
00206     t->_mp_exp = 0;
00207 }
00208
00209 /*
00210     #] Form_mpf_clear :
00211     #[ Form_mpf_empty :
00212 */
00213
00214 void Form_mpf_empty(mpf_t t)
00215 {
00216     int i;
00217     for ( i = 0; i < t->_mp_prec; i++ ) t->_mp_d[i] = 0;
00218     t->_mp_size = 0;
00219     t->_mp_exp = 0;
00220 }
00221
00222 /*
00223     #] Form_mpf_empty :
00224     #[ Form_mpf_set_prec_raw :
00225 */
00226
00227 void Form_mpf_set_prec_raw(mpf_t t,ULONG newprec)
00228 {
00229     ULONG newpr = (newprec + 8*sizeof(mp_limb_t)-1)/(8*sizeof(mp_limb_t)) + 1;
00230     if ( newpr <= (ULONG)(t->_mp_prec) ) {
00231         int i, used = ABS(t->_mp_size) ;
00232         if ( newpr > (ULONG)used ) {
00233             for ( i = used; i < (int)newpr; i++ ) t->_mp_d[i] = 0;
00234         }
00235         if ( t->_mp_size < 0 ) newpr = -newpr;
00236         t->_mp_size = newpr;
00237     }
00238     else {
00239         /*
00240             We can choose here between "forget about it" or making a new malloc.
00241             If the program is well designed, we should never get here though.
00242             For now we choose the "forget it" option.
00243         */
00244         MesPrint("Trying too big a precision %ld in Form_mpf_set_prec_raw.",newprec);
00245         MesPrint("Old maximal precision is %ld.",
00246                 (size_t)(t->_mp_prec-1)*sizeof(mp_limb_t)*8);
00247         Terminate(-1);
00248     }
00249 }
00250
00251 /*
00252     #] Form_mpf_set_prec_raw :
00253     #[ PackFloat :
00254
00255     Puts an object of type mpf_t inside a function float_
00256     float_(prec, nlimbs, exp, limbs);
00257     Complication: the limbs and the exponent are long's. That means
00258     two times the size of a Form (U)WORD.
00259     To save space we could split the limbs in two because Form stores
00260     coefficients as rationals with equal space for numerator and denominator.
00261     Hence for each limb we could put the most significant UWORD in the
00262     numerator and the least significant limb in the denominator.
00263     This gives a problem with the compilation and subsequent potential
00264     normalization of the 'fraction'. Hence for now we take the wasteful
00265     approach. At a later stage we can try to veto normalization of FLOATFUN.

```

```

00266     Caution: gmp/fmp is little endian and Form is big endian.
00267
00268     Zero is represented by zero limbs (and zero exponent).
00269 */
00270
00271 int PackFloat(WORD *fun, mpf_t infloat)
00272 {
00273     WORD *t, nlimbs, num, nnum;
00274     mp_limb_t *d = infloat->_mp_d; /* Pointer to the limbs. */
00275     int i;
00276     long e = infloat->_mp_exp;
00277     t = fun;
00278     *t++ = FLOATFUN;
00279     t++;
00280     FILLFUN(t);
00281     *t++ = -SNUMBER;
00282     *t++ = infloat->_mp_prec;
00283     *t++ = -SNUMBER;
00284     *t++ = infloat->_mp_size;
00285 /*
00286     Now the exponent which is a signed long
00287 */
00288     if ( e < 0 ) {
00289         e = -e;
00290         if ( ( e > (BITSINWORD-1) ) == 0 ) {
00291             *t++ = -SNUMBER; *t++ = -e;
00292         }
00293         else {
00294             *t++ = ARGHEAD+6; *t++ = 0; FILLARG(t);
00295             *t++ = 6;
00296             *t++ = (UWORD)e;
00297             *t++ = (UWORD)(e > BITSINWORD);
00298             *t++ = 1; *t++ = 0; *t++ = -5;
00299         }
00300     }
00301     else {
00302         if ( ( e > (BITSINWORD-1) ) == 0 ) {
00303             *t++ = -SNUMBER; *t++ = e;
00304         }
00305         else {
00306             *t++ = ARGHEAD+6; *t++ = 0; FILLARG(t);
00307             *t++ = 6;
00308             *t++ = (UWORD)e;
00309             *t++ = (UWORD)(e > BITSINWORD);
00310             *t++ = 1; *t++ = 0; *t++ = 5;
00311         }
00312     }
00313 /*
00314     and now the limbs. Note that the number of active limbs could be less
00315     than prec+1 in which case we copy the smaller number.
00316 */
00317     nlimbs = infloat->_mp_size < 0 ? -infloat->_mp_size: infloat->_mp_size;
00318     if ( nlimbs == 0 ) {
00319         *t++ = -SNUMBER;
00320         *t++ = 0;
00321     }
00322     else if ( nlimbs == 1 && (ULONG)(*d) < ((ULONG)1)«(BITSINWORD-1) ) {
00323         *t++ = -SNUMBER;
00324         *t++ = (UWORD)(*d);
00325     }
00326     else {
00327         if ( d[nlimbs-1] < ((ULONG)1)«BITSINWORD ) {
00328             num = 2*nlimbs-1; /* number of UWORDS needed */
00329         }
00330         else {
00331             num = 2*nlimbs; /* number of UWORDS needed */
00332         }
00333         nnum = num;
00334         *t++ = 2*num+2+ARGHEAD;
00335         *t++ = 0;
00336         FILLARG(t);
00337         *t++ = 2*num+2;
00338         while ( num > 1 ) {
00339             *t++ = (UWORD)(*d); *t++ = (UWORD)((ULONG)(*d)»BITSINWORD); d++;
00340             num -= 2;
00341         }
00342         if ( num == 1 ) { *t++ = (UWORD)(*d); }
00343         *t++ = 1;
00344         for ( i = 1; i < nnum; i++ ) *t++ = 0;
00345         *t++ = 2*nnum+1; /* the sign is hidden in infloat->_mp_size */
00346     }
00347     fun[1] = t-fun;
00348     return(fun[1]);
00349 }
00350
00351 /*
00352     #] PackFloat :

```

```

00353     #! UnpackFloat :
00354
00355     Takes the arguments of a function float_ and puts it inside an mpf_t.
00356     For notation see commentary for PutInFloat.
00357
00358     We should make a new allocation for the limbs if the precision exceeds
00359     the present precision of outfloat, or when outfloat has not been
00360     initialized yet.
00361
00362     The return value is -1 if the contents of the FLOATFUN cannot be converted.
00363     Otherwise the return value is the number of limbs.
00364 */
00365
00366 int UnpackFloat(mpf_t outfloat, WORD *fun)
00367 {
00368     UWORD *t;
00369     WORD *f;
00370     int num, i;
00371     mp_limb_t *d;
00372
00373     /* Very first step: check whether we can use float_:
00374     */
00375     GETIDENTITY
00376     if ( AT.aux_ == 0 ) {
00377         MesPrint("Illegal attempt at using a float_ function without proper startup.");
00378         MesPrint("Please use %#StartFloat <options> first.");
00379         Terminate(-1);
00380     }
00381
00382     /* Check first the number and types of the arguments
00383     There should be 4. -SNUMBER, -SNUMBER, -SNUMBER or a long number.
00384     + the limbs, either -SNUMBER or Long number in the form of a Form rational.
00385     */
00386     if ( TestFloat(fun) == 0 ) goto Incorrect;
00387     f = fun + FUNHEAD + 2;
00388     if ( ABS(f[1]) > f[-1]+1 ) goto Incorrect;
00389     if ( f[1] > outfloat->_mp_prec+1
00390         || outfloat->_mp_d == 0 ) {
00391         /*
00392             We need to make a new allocation.
00393             Unfortunately we cannot use Malloc1 because that is not
00394             recognised by gmp and hence we cannot clear with mpf_clear.
00395             Maybe we can do something about it by making our own
00396             mpf_init and mpf_clear?
00397         */
00398         if ( outfloat->_mp_d != 0 ) free(outfloat->_mp_d);
00399         outfloat->_mp_d = (mp_limb_t *)malloc((f[1]+1)*sizeof(mp_limb_t));
00400     }
00401     num = f[1];
00402     outfloat->_mp_size = num;
00403     if ( num < 0 ) { num = -num; }
00404     f += 2;
00405     if ( *f == -SNUMBER ) {
00406         outfloat->_mp_exp = (mp_exp_t)(f[1]);
00407         f += 2;
00408     }
00409     else {
00410         f += ARGHEAD+6;
00411         if ( f[-1] == -5 ) {
00412             outfloat->_mp_exp =
00413                 -(mp_exp_t)((((ULONG)(f[-4]))<BITSINWORD)+(UWORD)f[-5]);
00414         }
00415         else if ( f[-1] == 5 ) {
00416             outfloat->_mp_exp =
00417                 (mp_exp_t)((((ULONG)(f[-4]))<BITSINWORD)+(UWORD)f[-5]);
00418         }
00419     }
00420
00421     /* And now the limbs if needed
00422     */
00423     d = outfloat->_mp_d;
00424     if ( outfloat->_mp_size == 0 ) {
00425         for ( i = 0; i < outfloat->_mp_prec; i++ ) *d++ = 0;
00426         return(0);
00427     }
00428     else if ( *f == -SNUMBER ) {
00429         *d++ = (mp_limb_t)f[1];
00430         for ( i = 0; i < outfloat->_mp_prec; i++ ) *d++ = 0;
00431         return(0);
00432     }
00433     num = (*f-ARGHEAD-2)/2; /* 2*number of limbs in the argument */
00434     t = (UWORD *) (f+ARGHEAD+1);
00435     while ( num > 1 ) {
00436         *d++ = (mp_limb_t)((((ULONG)(t[1]))<BITSINWORD)+t[0]);
00437         t += 2; num -= 2;
00438     }
00439     if ( num == 1 ) *d++ = (mp_limb_t)((UWORD)(*t));

```

```

00440     for ( i = d-outfloat->_mp_d; i <= outfloat->_mp_prec; i++ ) *d++ = 0;
00441     return(0);
00442 Incorrect:
00443     return(-1);
00444 }
00445
00446 /*
00447     #] UnpackFloat :
00448     #[ TestFloat :
00449
00450     Tells whether the function (with its arguments) is a legal float_.
00451     We assume, as in the whole float library that one limb is 2 WORDs.
00452 */
00453
00454 int TestFloat(WORD *fun)
00455 {
00456     WORD *fstop, *f, num, nnum, i;
00457     fstop = fun+fun[1];
00458     f = fun + FUNHEAD;
00459     num = 0;
00460     /*
00461     Count arguments
00462     */
00463     while ( f < fstop ) { num++; NEXTARG(f); }
00464     if ( num != 4 ) return(0);
00465     f = fun + FUNHEAD;
00466     if ( *f != -SNUMBER ) return(0);
00467     if ( f[1] < 0 ) return(0);
00468     f += 2;
00469     if ( *f != -SNUMBER ) return(0);
00470     num = ABS(f[1]); /* number of limbs */
00471     f += 2;
00472     if ( *f == -SNUMBER ) { f += 2; }
00473     else {
00474         if ( *f != ARGHEAD+6 ) return(0);
00475         if ( ABS(f[ARGHEAD+5]) != 5 ) return(0);
00476         if ( f[ARGHEAD+3] != 1 ) return(0);
00477         if ( f[ARGHEAD+4] != 0 ) return(0);
00478         f += *f;
00479     }
00480     if ( num == 0 ) return(1);
00481     if ( *f == -SNUMBER ) { if ( num != 1 ) return(0); }
00482     else {
00483         nnum = (ABS(f[*f-1])-1)/2;
00484         if ( ( *f != 4*num+2+ARGHEAD ) && ( *f != 4*num+ARGHEAD ) ) return(0);
00485         if ( ( nnum != 2*num ) && ( nnum != 2*num-1 ) ) return(0);
00486         f += ARGHEAD+nnum+1;
00487         if ( f[0] != 1 ) return(0);
00488         for ( i = 1; i < nnum; i++ ) {
00489             if ( f[i] != 0 ) return(0);
00490         }
00491     }
00492     return(1);
00493 }
00494
00495 /*
00496     #] TestFloat :
00497     #[ FormtoZ :
00498
00499     Converts a Form long integer to a GMP long integer.
00500
00501     typedef struct
00502     {
00503         int _mp_alloc;    Number of *limbs* allocated and pointed
00504                          to by the _mp_d field.
00505         int _mp_size;     abs(_mp_size) is the number of limbs the
00506                          last field points to.  If _mp_size is
00507                          negative this is a negative number.
00508         mp_limb_t *_mp_d; Pointer to the limbs.
00509     } __mpz_struct;
00510     typedef __mpz_struct mpz_t[1];
00511 */
00512
00513 void FormtoZ(mpz_t z, UWORD *a, WORD na)
00514 {
00515     int nlimbs, sgn = 1;
00516     mp_limb_t *d;
00517     UWORD *b = a;
00518     WORD nb = na;
00519
00520     if ( nb == 0 ) {
00521         z->_mp_size = 0;
00522         z->_mp_d[0] = 0;
00523         return;
00524     }
00525     if ( nb < 0 ) { sgn = -1; nb = -nb; }
00526     nlimbs = (nb+1)/2;

```

```

00527     if ( mpz_cmp_si(z,0L) <= 1 ) {
00528         mpz_set_ui(z,10000000);
00529     }
00530     if ( z->_mp_alloc <= nlimbs ) {
00531         mpz_t zz;
00532         mpz_init(zz);
00533         while ( z->_mp_alloc <= nlimbs ) {
00534             mpz_mul(zz,z,z);
00535             mpz_set(z,zz);
00536         }
00537         mpz_clear(zz);
00538     }
00539     z->_mp_size = sgn*nlimbs;
00540     d = z->_mp_d;
00541     while ( nb > 1 ) {
00542         *d++ = ((mp_limb_t) (b[1]))«BITSINWORD)+(mp_limb_t) (b[0]);
00543         b += 2; nb -= 2;
00544     }
00545     if ( nb == 1 ) { *d = (mp_limb_t) (*b); }
00546 }
00547
00548 /*
00549     #] FormtoZ :
00550     #[ ZtoForm :
00551
00552     Converts a GMP long integer to a Form long integer.
00553     Mainly an exercise of going from little endian ULONGs.
00554     to big endian UWORDS
00555 */
00556
00557 void ZtoForm(UWORD *a,WORD *na,mpz_t z)
00558 {
00559     mp_limb_t *d = z->_mp_d;
00560     int nlimbs = ABS(z->_mp_size), i;
00561     UWORD j;
00562     if ( nlimbs == 0 ) { *na = 0; return; }
00563     *na = 0;
00564     for ( i = 0; i < nlimbs-1; i++ ) {
00565         *a++ = (UWORD) (*d);
00566         *a++ = (UWORD) ((*d++)«BITSINWORD);
00567         *na += 2;
00568     }
00569     *na += 1;
00570     *a++ = (UWORD) (*d);
00571     j = (UWORD) ((*d)«BITSINWORD);
00572     if ( j != 0 ) { *a = j; *na += 1; }
00573     if ( z->_mp_size < 0 ) *na = -*na;
00574 }
00575
00576 /*
00577     #] ZtoForm :
00578     #[ FloatToInteger :
00579
00580     Converts a GMP float to a long Form integer.
00581 */
00582
00583 long FloatToInteger(UWORD *out, mpf_t floatin, long *bitsused)
00584 {
00585     mpz_t z;
00586     WORD nout, nx;
00587     UWORD x;
00588     mpz_init(z);
00589     mpz_set_f(z,floatin);
00590     ZtoForm(out,&nout,z);
00591     mpz_clear(z);
00592     x = out[0]; nx = 0;
00593     while ( x ) { nx++; x »= 1; }
00594     *bitsused = (nout-1)*BITSINWORD + nx;
00595     return(nout);
00596 }
00597
00598 /*
00599     #] FloatToInteger :
00600     #[ IntegerToFloat :
00601
00602     Converts a Form long integer to a gmp float of default size.
00603     We assume that sizeof(unsigned long int) = 2*sizeof(UWORD).
00604 */
00605
00606 void IntegerToFloat(mpf_t result, UWORD *formlong, int longsize)
00607 {
00608     mpz_t z;
00609     mpz_init(z);
00610     FormtoZ(z,formlong,longsize);
00611     mpf_set_z(result,z);
00612     mpz_clear(z);
00613 }

```



```

00614
00615 /*
00616     #] IntegerToFloat :
00617     #[ RatToFloat :
00618
00619     Converts a Form rational to a gmp float of default size.
00620 */
00621
00622 void RatToFloat(mpf_t result, UWORD *formrat, int ratsize)
00623 {
00624     GETIDENTITY
00625     int nnum, nden;
00626     UWORD *num, *den;
00627     int sgn = 0;
00628     if ( ratsize < 0 ) { ratsize = -ratsize; sgn = 1; }
00629     nnum = nden = (ratsize-1)/2;
00630     num = formrat; den = formrat+nnum;
00631     while ( num[nnum-1] == 0 ) { nnum--; }
00632     while ( den[nden-1] == 0 ) { nden--; }
00633     IntegerToFloat(aux2,num,nnum);
00634     IntegerToFloat(aux3,den,nden);
00635     mpf_div(result,aux2,aux3);
00636     if ( sgn > 0 ) mpf_neg(result,result);
00637 }
00638
00639 /*
00640     #] RatToFloat :
00641     #[ FloatFunToRat :
00642 */
00643
00644 WORD FloatFunToRat(PHEAD UWORD *ratout,WORD *in)
00645 {
00646     WORD oldin = in[0], nratout;
00647     in[0] = FLOATFUN;
00648     UnpackFloat(aux4,in);
00649     FloatToRat(ratout,&nratout,aux4);
00650     in[0] = oldin;
00651     return(nratout);
00652 }
00653
00654 /*
00655     #] FloatFunToRat :
00656     #[ FloatToRat :
00657
00658     Converts a gmp float to a Form rational.
00659     The algorithm we use is 'repeated fractions' of the style
00660         n0+1/(n1+1/(n2+1/(n3+.....)))
00661     The moment we get an n that is very large we should have the proper fraction
00662     Main problem: what if the sequence keeps going?
00663         (there are always rounding errors)
00664     We need a cutoff with an error condition.
00665     Basically the product n0*n1*n2*... is an underlimit on the number of
00666     digits in the answer. We can put a limit on this.
00667     A return value of zero means that everything went fine.
00668 */
00669
00670 int FloatToRat(UWORD *ratout, WORD *nratout, mpf_t floatin)
00671 {
00672     GETIDENTITY
00673     WORD *out = AT.WorkPointer;
00674     WORD s; /* the sign. */
00675     UWORD *a, *b, *c, *d, *mc;
00676     WORD na, nb, nc, nd, i;
00677     int nout;
00678     LONG oldpWorkPointer = AT.pWorkPointer;
00679     long bitsused = 0, totalbitsused = 0, totalbits = AC.DefaultPrecision;
00680     int retval = 0, startnul;
00681     WantAddPointers(AC.DefaultPrecision); /* Horrible overkill */
00682     AT.pWorkSpace[AT.pWorkPointer++] = out;
00683     a = NumberMalloc("FloatToRat");
00684     b = NumberMalloc("FloatToRat");
00685
00686     s = mpf_sgn(floatin);
00687     if ( s < 0 ) mpf_neg(floatin,floatin);
00688
00689     Form_mpf_empty(aux1);
00690     Form_mpf_empty(aux2);
00691     Form_mpf_empty(aux3);
00692
00693     mpf_trunc(aux1,floatin); /* This should now be an integer */
00694     mpf_sub(aux2,floatin,aux1); /* and this >= 0 */
00695     if ( mpf_sgn(aux1) == 0 ) { *out++ = 0; startnul = 1; }
00696     else {
00697         nout = FloatToInteger((UWORD *)out,aux1,&totalbitsused);
00698         out += nout;
00699         startnul = 0;
00700     }

```

```

00701     AT.pWorkspace[AT.pWorkPointer++] = out;
00702     if ( mpf_sgn(aux2) ) {
00703         for(;;) {
00704             mpf_ui_div(aux3,1,aux2);
00705             mpf_trunc(aux1,aux3);
00706             mpf_sub(aux2,aux3,aux1);
00707             if ( mpf_sgn(aux1) == 0 ) { *out++ = 0; }
00708             else {
00709                 nout = FloatToInteger((UWORD *)out,aux1,&bitsused);
00710                 out += nout;
00711                 totalbitsused += bitsused;
00712             }
00713             if ( bitsused > (totalbits-totalbitsused)/2 ) { break; }
00714             if ( mpf_sgn(aux2) == 0 ) {
00715                 /*if ( startnul == 1 )*/ AT.pWorkspace[AT.pWorkPointer++] = out;
00716                 break;
00717             }
00718             AT.pWorkspace[AT.pWorkPointer++] = out;
00719         }
00720     /*
00721     At this point we have the function with the repeated fraction.
00722     Now we should work out the fraction. Form code would be:
00723     repeat id dum_(?a,x1?,x2?) = dum_(?a,x1+1/x2);
00724     id dum_(x?) = x;
00725     We have to work backwards. This is why we made a list of pointers
00726     in AT.pWorkspace
00727
00728     Now we need the long integers a and b.
00729     Note that by construction there should never be a GCD!
00730 */
00731     out = (WORD *) (AT.pWorkspace[--AT.pWorkPointer]);
00732     na = 1; a[0] = 1;
00733     c = (UWORD *) (AT.pWorkspace[--AT.pWorkPointer]);
00734     nc = nb = ((UWORD *)out)-c;
00735     if ( nc > 10 ) {
00736         mc = c;
00737         c = (UWORD *) (AT.pWorkspace[--AT.pWorkPointer]);
00738         nc = nb = ((UWORD *)mc)-c;
00739     }
00740     for ( i = 0; i < nb; i++ ) b[i] = c[i];
00741     mc = c = NumberMalloc("FloatToRat");
00742     while ( AT.pWorkPointer > oldpWorkPointer ) {
00743         d = (UWORD *) (AT.pWorkspace[--AT.pWorkPointer]);
00744         nd = (UWORD *) (AT.pWorkspace[AT.pWorkPointer+1])-d; /* This is the x1 in the formula */
00745         if ( nd == 1 && *d == 0 ) break;
00746         c = a; a = b; b = c; nc = na; na = nb; nb = nc; /* 1/x2 */
00747         MullLong(d,nd,a,na,mc,&nc);
00748         AddLong(mc,nc,b,nb,b,&nb);
00749     }
00750     NumberFree(mc,"FloatToRat");
00751     if ( startnul == 0 ) {
00752         c = a; a = b; b = c; nc = na; na = nb; nb = nc;
00753     }
00754 }
00755 else {
00756     c = (UWORD *) (AT.pWorkspace[oldpWorkPointer]);
00757     na = (UWORD *)out - c;
00758     for ( i = 0; i < na; i++ ) a[i] = c[i];
00759     b[0] = 1; nb = 1;
00760 }
00761 /*
00762 Now we have the fraction in a/b. Create the rational and add the sign.
00763 */
00764 d = ratout;
00765 if ( na == nb ) {
00766     *nratout = (2*na+1)*s;
00767     for ( i = 0; i < na; i++ ) *d++ = a[i];
00768     for ( i = 0; i < nb; i++ ) *d++ = b[i];
00769 }
00770 else if ( na < nb ) {
00771     *nratout = (2*nb+1)*s;
00772     for ( i = 0; i < na; i++ ) *d++ = a[i];
00773     for ( ; i < nb; i++ ) *d++ = 0;
00774     for ( i = 0; i < nb; i++ ) *d++ = b[i];
00775 }
00776 else {
00777     *nratout = (2*na+1)*s;
00778     for ( i = 0; i < na; i++ ) *d++ = a[i];
00779     for ( i = 0; i < nb; i++ ) *d++ = b[i];
00780     for ( ; i < na; i++ ) *d++ = 0;
00781 }
00782 *d = (UWORD) (*nratout);
00783 NumberFree(b,"FloatToRat");
00784 NumberFree(a,"FloatToRat");
00785 AT.pWorkPointer = oldpWorkPointer;
00786 /*
00787 Just for check we go back to float

```

```

00788 */
00789 if ( s < 0 ) mpf_neg(floatin,floatin);
00790 /*
00791 {
00792     WORD n = *ratout;
00793     RatToFloat(aux1, ratout, n);
00794     mpf_sub(aux2, floatin, aux1);
00795     gmp_printf("Diff is %.*Fe\n", 40, aux2);
00796 }
00797 */
00798 return(retval);
00799 }
00800
00801 /*
00802     #] FloatToRat :
00803     #[ ZeroTable :
00804 */
00805
00806 void ZeroTable(mpf_t *tab, int N)
00807 {
00808     int i, j;
00809     for ( i = 0; i < N; i++ ) {
00810         for ( j = 0; j < tab[i]->_mp_prec; j++ ) tab[i]->_mp_d[j] = 0;
00811     }
00812 }
00813
00814 /*
00815     #] ZeroTable :
00816     #[ ReadFloat :
00817
00818     Used by the compiler. It reads a floating point number and
00819     outputs it at AT.WorkPointer as if it were a float_ function
00820     with its arguments.
00821     The call enters with s[-1] == TFLOAT.
00822 */
00823
00824 SBYTE *ReadFloat(SBYTE *s)
00825 {
00826     GETIDENTITY
00827     SBYTE *ss, c;
00828     ss = s;
00829     while ( *ss > 0 ) ss++;
00830     c = *ss; *ss = 0;
00831     gmp_sscanf((char *)s, "%Ff", aux1);
00832     if ( AT.WorkPointer > AT.WorkTop ) {
00833         MLOCK(ErrorMessageLock);
00834         MesWork();
00835         MUNLOCK(ErrorMessageLock);
00836         Terminate(-1);
00837     }
00838     PackFloat(AT.WorkPointer, aux1);
00839     *ss = c;
00840     return(ss);
00841 }
00842
00843 /*
00844     #] ReadFloat :
00845     #[ CheckFloat :
00846
00847     For the tokenizer. Tests whether the input string can be a float.
00848 */
00849
00850 UBYTE *CheckFloat(UBYTE *ss, int *spec)
00851 {
00852     GETIDENTITY
00853     UBYTE *s = ss;
00854     int gotdot = 0;
00855     /* A single dot is not a valid float */
00856     if ( *s == '.' && FG.cTable[s[-1]] != 1 && FG.cTable[s[1]] != 1 ) return(ss);
00857     while ( FG.cTable[s[-1]] == 1 ) s--;
00858     /* This cannot be a valid float */
00859     if ( *s != '.' && FG.cTable[*s] != 1 ) return(ss);
00860     *spec = 0;
00861     while ( FG.cTable[*s] == 1 ) s++;
00862     if ( *s == '.' ) {
00863         gotdot = 1;
00864         s++;
00865         while ( FG.cTable[*s] == 1 ) s++;
00866     }
00867 /*
00868     Now we have had the mantissa part, which may be zero.
00869     Check for an exponent.
00870 */
00871     if ( *s == 'e' || *s == 'E' ) {
00872         s++;
00873         if ( *s == '-' || *s == '+' ) s++;
00874         if ( FG.cTable[*s] == 1 ) {

```

```

00875         s++;
00876         while ( FG.cTable[*s] == 1 ) s++;
00877     }
00878     else { return(ss); }
00879 }
00880 else if ( gotdot == 0 ) return(ss); /* No radix point and no exponent */
00881 if ( AT.aux_ == 0 ) { /* no floating point system */
00882     *spec = -1;
00883     return(s);
00884 }
00885 return(s);
00886 }
00887
00888 /*
00889     #] CheckFloat :
00890     #] Low Level :
00891     #[ Float Routines :
00892         #[ SetFloatPrecision :
00893
00894         Sets the default precision (in bits) of the floats and allocate
00895         buffer space for an output string.
00896         The buffer is used by PrintFloat (decimal output) and Strictrounding
00897         (binary or decimal output), so it must accommodate the larger space
00898         requirement:
00899         exponent: up to 12 chars.
00900         mantissa: prec + a little bit extra
00901 */
00902
00903 int SetFloatPrecision(WORD prec)
00904 {
00905     if ( prec <= 0 ) {
00906         MesPrint("&Illegal value for number of bits for floating point constants: %d",prec);
00907         return(-1);
00908     }
00909     else {
00910         AC.DefaultPrecision = prec;
00911         if ( AO.floatspace != 0 ) M_free(AO.floatspace,"floatspace");
00912         AO.floatsize = (prec+20)*sizeof(char);
00913         AO.floatspace = (UBYTE *)Malloc1(AO.floatsize,"floatspace");
00914         mpf_set_default_prec(prec);
00915         return(0);
00916     }
00917 }
00918
00919 /*
00920     #] SetFloatPrecision :
00921     #[ PrintFloat :
00922
00923     Print the float_ function with its arguments as a floating point
00924     number with numdigits digits.
00925     If however we use rawfloat as a format option it prints it as a
00926     regular Form function and it should never come here because the
00927     print routines in sch.c should intercept it.
00928     The buffer AO.floatspace is allocated when the precision of the
00929     floats is set in the routine SetFloatPrecision.
00930 */
00931
00932 int PrintFloat(WORD *fun,int numdigits)
00933 {
00934     GETIDENTITY
00935     UBYTE *s1, *s2;
00936     int n = 0;
00937     int prec = (AC.DefaultPrecision-AC.MaxWeight-1)*log10(2.0);
00938     if ( numdigits > prec || numdigits == 0 ) {
00939         numdigits = prec;
00940     }
00941     /*
00942     GMP's gmp_snprintf always prints a non-zero number before the decimal point, so we
00943     ask for one digit less.
00944 */
00945     if ( UnpackFloat(aux4,fun) == 0 )
00946         n = gmp_snprintf((char *) (AO.floatspace),AO.floatsize,"%.*Fe",numdigits-1,aux4);
00947     if ( n > 0 ) {
00948         int n1, n2 = n;
00949         s1 = AO.floatspace+n;
00950         while ( s1 > AO.floatspace && s1[-1] != 'e'
00951             && s1[-1] != 'E' && s1[-1] != '.' ) { s1--; n2--; }
00952         if ( s1 > AO.floatspace && s1[-1] != '.' ) {
00953             s1--; n2--;
00954             s2 = s1; n1 = n2;
00955             while ( s1[-1] == '0' ) { s1--; n1--; }
00956             if ( s1[-1] == '.' ) { s1++; n1++; }
00957             n -= (n2-n1);
00958             while ( n1 < n ) { *s1++ = *s2++; n1++; }
00959             *s1 = 0;
00960         }
00961         if ( AC.OutputMode == FORTRANMODE ) {

```

```

00962         s1 = AO.floatspace+n;
00963         while ( s1 > AO.floatspace && *s1 != 'e' && *s1 != 'E' ) {
00964             s1--;
00965         }
00966         if ( ( AO.DoubleFlag & 2 ) == 2 ) { *s1 = 'Q'; } /* Quadruple precision fortran */
00967         else if ( ( AO.DoubleFlag & 1 ) == 1 ) { *s1 = 'D'; } /* Double precision fortran */
00968         else { *s1 = 'E'; } /* Single precision fortran */
00969     }
00970     if ( AC.OutputMode == MATHEMATICAMODE ) {
00971         s1 = AO.floatspace+n;
00972         s2 = s1+2; *s2-- = 0;
00973         while ( s1 > AO.floatspace && *s1 != 'e' && *s1 != 'E' ) {
00974             *s2-- = *s1--;
00975         }
00976         *s2-- = '^'; *s2 = '*'; /* Replace 'e' by '^*' */
00977         n++;
00978     }
00979 }
00980 return(n);
00981 }
00982
00983 /*
00984     #] PrintFloat :
00985     #[ AddFloats :
00986 */
00987
00988 int AddFloats(PHEAD WORD *fun3, WORD *fun1, WORD *fun2)
00989 {
00990     int retval = 0;
00991     if ( UnpackFloat(aux1,fun1) == 0 && UnpackFloat(aux2,fun2) == 0 ) {
00992         mpf_add(aux1,aux1,aux2);
00993         PackFloat(fun3,aux1);
00994     }
00995     else { retval = -1; }
00996     return(retval);
00997 }
00998
00999 /*
01000     #] AddFloats :
01001     #[ MulFloats :
01002 */
01003
01004 int MulFloats(PHEAD WORD *fun3, WORD *fun1, WORD *fun2)
01005 {
01006     int retval = 0;
01007     if ( UnpackFloat(aux1,fun1) == 0 && UnpackFloat(aux2,fun2) == 0 ) {
01008         mpf_mul(aux1,aux1,aux2);
01009         PackFloat(fun3,aux1);
01010     }
01011     else { retval = -1; }
01012     return(retval);
01013 }
01014
01015 /*
01016     #] MulFloats :
01017     #[ DivFloats :
01018 */
01019
01020 int DivFloats(PHEAD WORD *fun3, WORD *fun1, WORD *fun2)
01021 {
01022     int retval = 0;
01023     if ( UnpackFloat(aux1,fun1) == 0 && UnpackFloat(aux2,fun2) == 0 ) {
01024         mpf_div(aux1,aux1,aux2);
01025         PackFloat(fun3,aux1);
01026     }
01027     else { retval = -1; }
01028     return(retval);
01029 }
01030
01031 /*
01032     #] DivFloats :
01033     #[ AddRatToFloat :
01034
01035     Note: this can be optimized, because often the rat is rather simple.
01036 */
01037
01038 int AddRatToFloat(PHEAD WORD *outfun, WORD *infun, UWORD *formrat, WORD nrat)
01039 {
01040     int retval = 0;
01041     if ( UnpackFloat(aux2,infun) == 0 ) {
01042         RatToFloat(aux1,formrat,nrat);
01043         mpf_add(aux2,aux2,aux1);
01044         PackFloat(outfun,aux2);
01045     }
01046     else retval = -1;
01047     return(retval);
01048 }

```

```

01049
01050 /*
01051     #] AddRatToFloat :
01052     #[ MulRatToFloat :
01053
01054     Note: this can be optimized, because often the rat is rather simple.
01055 */
01056
01057 int MulRatToFloat(PHEAD WORD *outfun, WORD *infun, UWORD *formrat, WORD nrat)
01058 {
01059     int retval = 0;
01060     if ( UnpackFloat(aux2,infun) == 0 ) {
01061         RatToFloat(aux1,formrat,nrat);
01062         mpf_mul(aux2,aux2,aux1);
01063         PackFloat(outfun,aux2);
01064     }
01065     else retval = -1;
01066     return(retval);
01067 }
01068
01069 /*
01070     #] MulRatToFloat :
01071     #[ SetupMZVTables :
01072 */
01073
01074 void SetupMZVTables(void)
01075 {
01076     /*
01077         Sets up a table of N+1 mpf_t floats with variable precision.
01078         It assumes that each next element needs one bit less.
01079         Initializes all of them.
01080         We take some extra space, to have one limb overflow everywhere.
01081         Because the depth of the MZV's can get close to the weight
01082         and each deeper sum goes one higher, we make the tablesize a bit bigger.
01083         This may not be needed if we fiddle with the sum boundaries.
01084     */
01085     #ifdef WITHPTHREADS
01086         int i, Nw, id, totnum;
01087         size_t N;
01088         mpf_t *a;
01089         Nw = AC.DefaultPrecision;
01090         N = (size_t)Nw;
01091         totnum = AM.totalnumberofthreads;
01092         for ( id = 0; id < totnum; id++ ) {
01093             AB[id]->T.mpf_tab1 = (void *)Malloc1((N+2)*sizeof(mpf_t),"mpftab1");
01094             a = (mpf_t *)AB[id]->T.mpf_tab1;
01095             for ( i = 0; i <=Nw; i++ ) {
01096                 /*
01097                     As explained in the comment above, we could make this variable precision
01098                     using mpf_init2.
01099                 */
01100                 mpf_init(a[i]);
01101             }
01102             AB[id]->T.mpf_tab2 = (void *)Malloc1((N+2)*sizeof(mpf_t),"mpftab2");
01103             a = (mpf_t *)AB[id]->T.mpf_tab2;
01104             for ( i = 0; i <=Nw; i++ ) {
01105                 mpf_init(a[i]);
01106             }
01107         }
01108     #else
01109         int i, Nw;
01110         size_t N;
01111         Nw = AC.DefaultPrecision;
01112         N = (size_t)Nw;
01113         AT.mpf_tab1 = (void *)Malloc1((N+2)*sizeof(mpf_t),"mpftab1");
01114         for ( i = 0; i <= Nw; i++ ) {
01115             /*
01116                 As explained in the comment above, we could make this variable precision
01117                 using mpf_init2.
01118             */
01119             mpf_init(mpftab1[i]);
01120         }
01121         AT.mpf_tab2 = (void *)Malloc1((N+2)*sizeof(mpf_t),"mpftab2");
01122         for ( i = 0; i <= Nw; i++ ) {
01123             mpf_init(mpftab2[i]);
01124         }
01125     #endif
01126     AS.delta_1 = (void *)Malloc1(sizeof(mpf_t),"delta1");
01127     mpf_init(mpfdelta1);
01128     SimpleDelta(mpfdelta1,1); /* this can speed up things. delta1 = ln(2) */
01129 }
01130
01131 /*
01132     #] SetupMZVTables :
01133     #[ SetupMPFTables :
01134
01135     Allocates the aux variables

```

```

01136 */
01137
01138 void SetupMPFTTables(void)
01139 {
01140     #ifdef WITHPTHREADS
01141         int id, totnum;
01142         mpf_t *a;
01143     #ifdef WITHSORTBOTS
01144         totnum = MaX(2*AM.totalnumberofthreads-3,AM.totalnumberofthreads);
01145     #endif
01146     for ( id = 0; id < totnum; id++ ) {
01147         /*
01148             We work here with a[0] etc because the aux1 etc contain B which
01149             in the current routine would be AB[0] only
01150         */
01151         AB[id]->T.aux_ = (void *)Malloca(sizeof(mpf_t)*8,"AB[id]->T.aux_");
01152         a = (mpf_t *)AB[id]->T.aux_;
01153         mpf_inits(a[0],a[1],a[2],a[3],a[4],a[5],a[6],a[7],(mpf_ptr)0);
01154         if ( AB[id]->T.indi1 ) M_free(AB[id]->T.indi1,"indi1");
01155         AB[id]->T.indi1 = (WORD *)Malloca(sizeof(WORD)*AC.MaxWeight*2,"indi1");
01156         AB[id]->T.indi2 = AB[id]->T.indi1 + AC.MaxWeight;
01157     }
01158     #else
01159     AT.aux_ = (void *)Malloca(sizeof(mpf_t)*8,"AT.aux_");
01160     mpf_inits(aux1,aux2,aux3,aux4,aux5,auxjm,auxjzm,auxsum,(mpf_ptr)0);
01161     if ( AT.indi1 ) M_free(AT.indi1,"indi1");
01162     AT.indi1 = (WORD *)Malloca(sizeof(WORD)*AC.MaxWeight*2,"indi1");
01163     AT.indi2 = AT.indi1 + AC.MaxWeight;
01164     #endif
01165 }
01166
01167 /*
01168     #] SetupMPFTTables :
01169     #[ ClearMZVTables :
01170 */
01171
01172 void ClearMZVTables(void)
01173 {
01174     #ifdef WITHPTHREADS
01175         int i, id, totnum;
01176         mpf_t *a;
01177         totnum = AM.totalnumberofthreads;
01178         for ( id = 0; id < totnum; id++ ) {
01179             if ( AB[id]->T.mpf_tab1 ) {
01180                 /*
01181                     We work here with a[0] etc because the aux1, mpftab1 etc contain B
01182                     which in the current routine would be AB[0] only
01183                 */
01184                 a = (mpf_t *)AB[id]->T.mpf_tab1;
01185                 for ( i = 0; i <= AC.DefaultPrecision; i++ ) {
01186                     mpf_clear(a[i]);
01187                 }
01188                 M_free(AB[id]->T.mpf_tab1,"mpftab1");
01189                 AB[id]->T.mpf_tab1 = 0;
01190             }
01191             if ( AB[id]->T.mpf_tab2 ) {
01192                 a = (mpf_t *)AB[id]->T.mpf_tab2;
01193                 for ( i = 0; i <= AC.DefaultPrecision; i++ ) {
01194                     mpf_clear(a[i]);
01195                 }
01196                 M_free(AB[id]->T.mpf_tab2,"mpftab2");
01197                 AB[id]->T.mpf_tab2 = 0;
01198             }
01199         }
01200     #ifdef WITHSORTBOTS
01201         totnum = MaX(2*AM.totalnumberofthreads-3,AM.totalnumberofthreads);
01202     #endif
01203     for ( id = 0; id < totnum; id++ ) {
01204         if ( AB[id]->T.aux_ ) {
01205             a = (mpf_t *)AB[id]->T.aux_;
01206             mpf_clears(a[0],a[1],a[2],a[3],a[4],a[5],a[6],a[7],(mpf_ptr)0);
01207             M_free(AB[id]->T.aux_,"AB[id]->T.aux_");
01208             AB[id]->T.aux_ = 0;
01209         }
01210         if ( AB[id]->T.indi1 ) { M_free(AB[id]->T.indi1,"indi1"); AB[id]->T.indi1 = 0; }
01211     }
01212     #else
01213     int i;
01214     if ( AT.mpf_tab1 ) {
01215         for ( i = 0; i <= AC.DefaultPrecision; i++ ) {
01216             mpf_clear(mpf_tab1[i]);
01217         }
01218         M_free(AT.mpf_tab1,"mpftab1");
01219         AT.mpf_tab1 = 0;
01220     }
01221     if ( AT.mpf_tab2 ) {
01222         for ( i = 0; i <= AC.DefaultPrecision; i++ ) {

```

```

01223         mpf_clear(mpfTAB2[i]);
01224     }
01225     M_free(AT.mpf_TAB2, "mpftab2");
01226     AT.mpf_TAB2 = 0;
01227 }
01228 if ( AT.aux_ ) {
01229     mpf_clears(aux1, aux2, aux3, aux4, aux5, auxjm, auxjjm, auxsum, (mpf_ptr) 0);
01230     M_free(AT.aux_, "AT.aux_");
01231     AT.aux_ = 0;
01232 }
01233 if ( AT.indi1 ) { M_free(AT.indi1, "indi1"); AT.indi1 = 0; }
01234 #endif
01235 if ( AO.floatspace ) { M_free(AO.floatspace, "floatspace"); AO.floatspace = 0;
01236     AO.floatsize = 0; }
01237 if ( AS.delta_1 ) {
01238     mpf_clear(mpfdelta1);
01239     M_free(AS.delta_1, "delta1");
01240     AS.delta_1 = 0;
01241 }
01242 }
01243
01244 /*
01245     #] ClearMZVTables :
01246     #[ CoToFloat :
01247 */
01248
01249 int CoToFloat (UBYTE *s)
01250 {
01251     GETIDENTITY
01252     if ( AT.aux_ == 0 ) {
01253         MesPrint("&Illegal attempt to convert to float_ without activating floating point numbers.");
01254         MesPrint("&Forgotten %#startfloat instruction?");
01255         return(1);
01256     }
01257     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01258     if ( *s ) {
01259         MesPrint("&Illegal argument(s) in ToFloat statement: '%s'", s);
01260         return(1);
01261     }
01262     Add2Com(TYPETOFLOAT);
01263     return(0);
01264 }
01265
01266 /*
01267     #] CoToFloat :
01268     #[ CoToRat :
01269 */
01270
01271 int CoToRat (UBYTE *s)
01272 {
01273     GETIDENTITY
01274     if ( AT.aux_ == 0 ) {
01275         MesPrint("&Illegal attempt to convert from float_ without activating floating point
01276 numbers.");
01277         MesPrint("&Forgotten %#startfloat instruction?");
01278         return(1);
01279     }
01280     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01281     if ( *s ) {
01282         MesPrint("&Illegal argument(s) in ToRat statement: '%s'", s);
01283         return(1);
01284     }
01285     Add2Com(TYPETORAT);
01286     return(0);
01287 }
01288
01289 /*
01290     #] CoToRat :
01291     #[ CoStrictRounding :
01292
01293     Syntax: StrictRounding [precision][base]
01294     - precision: number of digits to round to (optional)
01295     - base: 'd' for decimal (base 10) or 'b' for binary (base 2)
01296
01297     If no arguments are provided, uses default precision with binary base.
01298 */
01299 int CoStrictRounding (UBYTE *s)
01300 {
01301     GETIDENTITY
01302     WORD x;
01303     int base;
01304     if ( AT.aux_ == 0 ) {
01305         MesPrint("&Illegal attempt for strict rounding without activating floating point numbers.");
01306         MesPrint("&Forgotten %#startfloat instruction?");
01307         return(1);
01308     }
01309     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;

```



```

01309     if ( *s == 0 ) {
01310         /* No subkey, which means round to default precision */
01311         x = AC.DefaultPrecision - AC.MaxWeight - 1;
01312         base = 2;
01313     }
01314     else if ( FG.cTable[*s] == 1 ) { /* number */
01315         ParseNumber(x,s)
01316         if ( tolower(*s) == 'd' ) { base = 10; s++; } /* decimal base */
01317         else if ( tolower(*s) == 'b' ) { base = 2; s++; } /* binary base */
01318         else goto IllPar; /* invalid base specification */
01319     }
01320     else {
01321         goto IllPar;
01322     }
01323     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01324
01325     /* Check for invalid arguments */
01326     if ( *s ) {
01327     IllPar:
01328         MesPrint("&Illegal argument(s) in StrictRounding statement: '%s'",s);
01329         return(1);
01330     }
01331     Add4Com(TYPESTRICTROUNDING,x,base);
01332     return(0);
01333 }
01334 /*
01335     #] CoStrictRounding :
01336     #[ CoChop :
01337
01338     LHS notation of the chop statement:
01339         TYPECHOP, length, FLOATFUN, ...
01340     where FLOATFUN, ... represents the threshold of the chop statement in
01341     the notation of a float_ function with its arguments.
01342
01343 */
01344
01345 int CoChop(UBYTE *s)
01346 {
01347     GETIDENTITY
01348     UBYTE *ss, c;
01349     WORD *w, *OldWork;
01350     int spec, pow = 1;
01351     unsigned long x;
01352     if ( AT.aux_ == 0 ) {
01353         MesPrint("&Illegal attempt to chop a float_ without activating floating point numbers.");
01354         MesPrint("&Forgotten %#startfloat instruction?");
01355         return(1);
01356     }
01357     if ( *s == 0 ) {
01358         MesPrint("&Chop needs a number (float or rational) as an argument.");
01359         return(1);
01360     }
01361     /* Create TYPECHOP header */
01362     w = OldWork = AT.WorkPointer;
01363     *w++ = TYPECHOP;
01364     w++;
01365
01366     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01367
01368     /*
01369         The argument of chop can be
01370         1: a floating-point number
01371         2: an integer, rational number or power
01372     */
01373     if ( FG.cTable[*s] == 1 || *s == '.' ) {
01374         /* 1: Attempt to parse as floating-point number */
01375         ss = CheckFloat(s, &spec);
01376         if ( ss > s ) {
01377             /* CheckFloat found a valid float */
01378             AT.WorkPointer = w;
01379             /*
01380                 Reads the floating point number and outputs it at AT.WorkPointer as if it were a
01381                 float_
01382             */
01383             ReadFloat((SBYTE *)s);
01384             s = ss;
01385             w += w[1];
01386         }
01387         else {
01388             /* 2: CheckFloat didn't find a float, we now try for rationals and powers */
01389             /* Parse the integer part (numerator for rationals) */
01390             if ( FG.cTable[*s] == 1 ) {
01391                 ParseNumber(x,s)
01392                 mpf_set_ui(aux1,x);
01393             }
01394             while ( *s == ' ' || *s == '\t' ) s++;

```

```

01395         /* Check for rational number or power*/
01396         if ( *s == '/' || *s == '^' ) {
01397             c = *s; s++;
01398             while ( *s == ' ' || *s == '\t' ) s++;
01399             if ( *s == '-' ) { s++; pow = -1; } /* negative power */
01400             /* Parse the denominator or power */
01401             if ( FG.cTable[*s] == 1 ) {
01402                 ParseNumber(x,s)
01403                 if ( c == '/' ) { /* rational */
01404                     if ( x == 0 ) {
01405                         MesPrint("Division by zero in chop statement.");
01406                         return(1);
01407                     }
01408                     /* Perform the division */
01409                     mpf_div_ui(aux1, aux1,x);
01410                 }
01411                 else { /* Power */
01412                     mpf_pow_ui(aux1,aux1,x);
01413                     if ( pow == -1 ) {
01414                         mpf_ui_div(aux1, (unsigned long) 1, aux1);
01415                     }
01416                 }
01417             }
01418         }
01419         /* Put aux1 in the notation of a float_ function */
01420         PackFloat(w, aux1);
01421         w += w[1];
01422     }
01423 }
01424 if ( *s ) {
01425     MesPrint("&Illegal argument(s) in Chop statement: '%s'",s);
01426     return(1);
01427 }
01428 AT.WorkPointer = OldWork;
01429 AT.WorkPointer[1] = w - AT.WorkPointer; /* Set total length */
01430 AddNtoL(AT.WorkPointer[1],AT.WorkPointer); /* Add the LHS to the compiler buffer */
01431 return(0);
01432 }
01433
01434 /*
01435     #] CoChop :
01436     #[ ToFloat :
01437
01438     Converts the coefficient to floating point if it is still a rat.
01439 */
01440
01441 int ToFloat(PHEAD WORD *term, WORD level)
01442 {
01443     WORD *t, *tstop, nsize, nsign = 3;
01444     t = term+*term;
01445     nsize = ABS(t[-1]);
01446     tstop = t - nsize;
01447     if ( t[-1] < 0 ) { nsign = -nsign; }
01448     if ( nsize == 3 && t[-2] == 1 && t[-3] == 1 ) { /* Could be float */
01449         t = term + 1;
01450         while ( t < tstop ) {
01451             if ( ( *t == FLOATFUN ) && ( t+t[1] == tstop ) ) {
01452                 return(Generator(BHEAD term,level));
01453             }
01454             t += t[1];
01455         }
01456     }
01457     RatToFloat(aux4, (UWORD *)tstop,nsize);
01458     PackFloat(tstop,aux4);
01459     tstop += tstop[1];
01460     *tstop++ = 1; *tstop++ = 1; *tstop++ = nsign;
01461     *term = tstop - term;
01462     AT.WorkPointer = tstop;
01463     return(Generator(BHEAD term,level));
01464 }
01465
01466 /*
01467     #] ToFloat :
01468     #[ ToRat :
01469
01470     Tries to convert the coefficient to rational if it is still a float.
01471 */
01472
01473 int ToRat(PHEAD WORD *term, WORD level)
01474 {
01475     WORD *tstop, *t, nsize, nsign, ncoef;
01476     /*
01477     1: find the float which should be at the end.
01478     */
01479     tstop = term + *term; nsize = ABS(tstop[-1]);
01480     nsign = tstop[-1] < 0 ? -1: 1; tstop -= nsize;
01481     t = term+1;

```

```

01482     while ( t < tstop ) {
01483         if ( *t == FLOATFUN && t + t[1] == tstop && TestFloat(t) &&
01484             nsize == 3 && tstop[0] == 1 && tstop[1] == 1 ) break;
01485         t += t[1];
01486     }
01487     if ( t < tstop ) {
01488         /*
01489             Now t points at the float_ function and everything is correct.
01490             The result can go straight over the float_ function.
01491         */
01492         UnpackFloat(aux4,t);
01493         if ( FloatToRat((UWORD *)t,&ncoef,aux4) == 0 ) {
01494             t += ABS(ncoef);
01495             t[-1] = ncoef*nsign;
01496             *term = t - term;
01497         }
01498     }
01499     return(Generator(BHEAD term,level));
01500 }
01501
01502 /*
01503     #] ToRat :
01504     #[ StrictRounding :
01505
01506     Rounds floating point numbers to a specified precision
01507     in a given base (decimal or binary).
01508 */
01509 int StrictRounding(PHEAD WORD *term, WORD level, WORD prec, WORD base) {
01510     WORD *t,*tstop;
01511     int sign,size,maxprec = AC.DefaultPrecision-AC.MaxWeight-1;
01512     /* maxprec is in bits */
01513     if ( base == 2 && prec > maxprec ) {
01514         prec = maxprec;
01515     }
01516     if ( base == 10 && prec > (int)(maxprec*log10(2.0)) ) {
01517         prec = maxprec*log10(2.0);
01518     }
01519     /* Find the float which should be at the end. */
01520     tstop = term + *term; size = ABS(tstop[-1]);
01521     sign = tstop[-1] < 0 ? -1: 1; tstop -= size;
01522     t = term+1;
01523     while ( t < tstop ) {
01524         if ( *t == FLOATFUN && t + t[1] == tstop && TestFloat(t) &&
01525             size == 3 && tstop[0] == 1 && tstop[1] == 1 ) {
01526             break;
01527         }
01528         t += t[1];
01529     }
01530     if ( t < tstop ) {
01531         /*
01532             Now t points at the float_ function and everything is correct.
01533             The result can go straight over the float_ function.
01534         */
01535         char *s;
01536         mp_exp_t exp;
01537         /* Extract the floating point value */
01538         UnpackFloat(aux4,t);
01539         /* Convert to string:
01540             - Format as MeN with M the mantissa and N the exponent
01541             - the generated string by mpf_get_str is the fraction/mantissa with
01542             an implicit radix point immediately to the left of the first digit.
01543             The applicable exponent is written in exp. */
01544         s = (char *)AO.floatspace;
01545         *s++ = '.';
01546         mpf_get_str(s,&exp, base, prec, aux4);
01547         while ( *s != 0 ) s++;
01548         *s++ = 'e';
01549         snprintf(s,AO.floatsize-(s-(char *)AO.floatspace),"%ld",exp);
01550         /* Negative base values are used to specify that the exponent is in decimal */
01551         mpf_set_str(aux4,(char *)AO.floatspace,-base);
01552         /* Pack the rounded floating point value back into the term */
01553         PackFloat(t,aux4);
01554         t+=t[1];
01555         *t++ = 1; *t++ = 1; *t++ = 3*sign;
01556         *term = t - term;
01557     }
01558     return(Generator(BHEAD term,level));
01559 }
01560 /*
01561     #] StrictRounding :
01562     #[ Chop :
01563
01564     Removes terms with a floating point number smaller than a given threshold.
01565
01566     Search for a FLOATFUN and compares its absolute value against the threshold
01567     specified in the chop statement. This threshold can be obtained from the
01568     LHS of the chop statement in the compiler buffer.

```

```

01569
01570 */
01571 int Chop(PHEAD WORD *term, WORD level)
01572 {
01573     WORD *tstop, *t, nsize, *threshold;
01574     CBUF *C = cbuf+AM.rbufnum;
01575     /* Find the float which should be at the end. */
01576     tstop = term + *term;
01577     nsize = ABS(tstop[-1]); tstop -= nsize;
01578     t = term+1;
01579     while ( t < tstop ) {
01580         if ( *t == FLOATFUN && t + t[1] == tstop && TestFloat(t) &&
01581             nsize == 3 && tstop[0] == 1 && tstop[1] == 1 ) break;
01582         t += t[1];
01583     }
01584     if ( t < tstop ) {
01585         /* Get threshold value from compiler buffer */
01586         threshold = C->lhs[level];
01587         threshold += 2; /* Skip TYPECHOP header */
01588         UnpackFloat(aux5, threshold);
01589
01590         /* Extract float and compute its absolute value */
01591         UnpackFloat(aux4, t);
01592         mpf_abs(aux4, aux4);
01593
01594         /* Remove if < threshold */
01595         if ( mpf_cmp(aux4, aux5) < 0 ) return(0);
01596     }
01597     return(Generator(BHEAD term,level));
01598 }
01599
01600 /*
01601     #] Chop :
01602     #] Float Routines :
01603     #[ Sorting :
01604
01605     We need a method to see whether two terms need addition that could
01606     involve floating point numbers.
01607     1: if PolyWise is active, we do not need anything, because
01608         Poly(Rat)Fun and floating point are mutually exclusive.
01609     2: This means that there should be only interference in AddCoef.
01610         and the AddRat parts in MergePatches, MasterMerge, SortBotMerge
01611         and PF_GetLoser.
01612     The compare routine(s) should recognise the float_ and give off
01613     a code (SortFloatMode) inside the AT struct:
01614     0: no float_
01615     1: float_ in term1 only
01616     2: float_ in term2 only
01617     3: float_ in both terms
01618     Be careful: we have several compare routines, because various codes
01619     use their own routines and we just set a variable with its address.
01620     Currently we have Compare1, CompareSymbols and CompareHSymbols.
01621     Only Compare1 should be active for this. The others should make sure
01622     that the proper variable is always zero.
01623     Remember: the sign of the coefficient is in the last word of the term.
01624
01625     We need two routines:
01626     1: AddWithFloat for SplitMerge which sorts by pointer.
01627     2: MergeWithFloat for MergePatches etc which keeps terms as much
01628         as possible in their location.
01629     The routines start out the same, because AT.SortFloatMode, set in
01630     Compare1, tells more or less what should be done.
01631     The difference is in where we leave the result.
01632
01633     In the future we may want to add a feature that makes the result
01634     zero if the sum comes within a certain distance of the numerical
01635     accuracy, like for instance 5% of the number of bits.
01636
01637     #[ AddWithFloat :
01638 */
01639
01640 int AddWithFloat(PHEAD WORD **ps1, WORD **ps2)
01641 {
01642     GETBIDENTITY
01643     SORTING *S = AT.SS;
01644     WORD *coef1, *coef2, size1, size2, *fun1, *fun2, *fun3;
01645     WORD *s1,*s2,sign3,j,jj, *t1, *t2, i;
01646     s1 = *ps1;
01647     s2 = *ps2;
01648     coef1 = s1+s1; size1 = coef1[-1]; coef1 -= ABS(coef1[-1]);
01649     coef2 = s2+s2; size2 = coef2[-1]; coef2 -= ABS(coef2[-1]);
01650     if ( AT.SortFloatMode == 3 ) {
01651         fun1 = s1+1; while ( fun1 < coef1 && fun1[0] != FLOATFUN ) fun1 += fun1[1];
01652         fun2 = s2+1; while ( fun2 < coef2 && fun2[0] != FLOATFUN ) fun2 += fun2[1];
01653         UnpackFloat(aux1, fun1);
01654         if ( size1 < 0 ) mpf_neg(aux1,aux1);
01655         UnpackFloat(aux2, fun2);

```

```

01656         if ( size2 < 0 ) mpf_neg(aux2,aux2);
01657     }
01658     else if ( AT.SortFloatMode == 1 ) {
01659         fun1 = s1+1; while ( fun1 < coef1 && fun1[0] != FLOATFUN ) fun1 += fun1[1];
01660         UnpackFloat(aux1,fun1);
01661         if ( size1 < 0 ) mpf_neg(aux1,aux1);
01662         fun2 = coef2;
01663         RatToFloat(aux2,(UWORD *)coef2,size2);
01664     }
01665     else if ( AT.SortFloatMode == 2 ) {
01666         fun2 = s2+1; while ( fun2 < coef2 && fun2[0] != FLOATFUN ) fun2 += fun2[1];
01667         fun1 = coef1;
01668         RatToFloat(aux1,(UWORD *)coef1,size1);
01669         UnpackFloat(aux2,fun2);
01670         if ( size2 < 0 ) mpf_neg(aux2,aux2);
01671     }
01672     else {
01673         MLOCK(ErrorMessageLock);
01674         MesPrint("Illegal value %d for AT.SortFloatMode in AddWithFloat.",AT.SortFloatMode);
01675         MUNLOCK(ErrorMessageLock);
01676         Terminate(-1);
01677         return(0);
01678     }
01679     mpf_add(aux3,aux1,aux2);
01680     sign3 = mpf_sgn(aux3);
01681     if ( sign3 < 0 ) mpf_neg(aux3,aux3);
01682     fun3 = TermMalloc("AddWithFloat");
01683     PackFloat (fun3,aux3);
01684     /*
01685     Now we have to calculate where the sumterm fits.
01686     If we are sloppy, we can be faster, but run the risk to need the
01687     extension space, even when it is not needed. At slightly lower speed
01688     (ie first creating the result in scribble space) we are better off.
01689     This is why we use TermMalloc.
01690
01691     The new term will have a rational coefficient of 1,1,+3.
01692     The size will be (fun1 or fun2 - term) + fun3 +3;
01693     */
01694     if ( AT.SortFloatMode == 3 ) {
01695         if ( fun1[1] == fun3[1] ) {
01696 Over1:
01697             i = fun3[1]; t1 = fun1; t2 = fun3; NCOPY(t1,t2,i);
01698             *t1++ = 1; *t1++ = 1; *t1++ = sign3 < 0 ? -3: 3;
01699             *s1 = t1-s1; goto Finished;
01700         }
01701         else if ( fun2[1] == fun3[1] ) {
01702 Over2:
01703             i = fun3[1]; t1 = fun2; t2 = fun3; NCOPY(t1,t2,i);
01704             *t1++ = 1; *t1++ = 1; *t1++ = sign3 < 0 ? -3: 3;
01705             *s2 = t1-s2; *ps1 = s2; goto Finished;
01706         }
01707         else if ( fun1[1] >= fun3[1] ) goto Over1;
01708         else if ( fun2[1] >= fun3[1] ) goto Over2;
01709     }
01710     else if ( AT.SortFloatMode == 1 ) {
01711         if ( fun1[1] >= fun3[1] ) goto Over1;
01712         else if ( fun3[1]+3 <= ABS(size2) ) goto Over2;
01713     }
01714     else if ( AT.SortFloatMode == 2 ) {
01715         if ( fun2[1] >= fun3[1] ) goto Over2;
01716         else if ( fun3[1]+3 <= ABS(size1) ) goto Over1;
01717     }
01718     /*
01719     Does not fit. Go to extension space.
01720     */
01721     jj = fun1-s1;
01722     j = jj+fun3[1]+3; /* space needed */
01723     if ( (S->sFill + j) >= S->sTop2 ) {
01724         GarbHand();
01725         s1 = *ps1; /* new position of the term after the garbage collection */
01726         fun1 = s1+jj;
01727     }
01728     t1 = S->sFill;
01729     for ( i = 0; i < jj; i++ ) *t1++ = s1[i];
01730     i = fun3[1]; s1 = fun3; NCOPY(t1,s1,i);
01731     *t1++ = 1; *t1++ = 1; *t1++ = sign3 < 0 ? -3: 3;
01732     *ps1 = S->sFill;
01733     **ps1 = t1-*ps1;
01734     S->sFill = t1;
01735 Finished:
01736     *ps2 = 0;
01737     TermFree(fun3,"AddWithFloat");
01738     AT.SortFloatMode = 0;
01739     if ( **ps1 > AM.MaxTer/((LONG)(sizeof(WORD))) ) {
01740         MLOCK(ErrorMessageLock);
01741         MesPrint("Term too complex after addition in sort. MaxTermSize = %10l",
01742             AM.MaxTer/sizeof(WORD));

```

```

01743     MUNLOCK(ErrorMessageLock);
01744     Terminate(-1);
01745 }
01746 return(1);
01747 }
01748
01749 /*
01750     #] AddWithFloat :
01751     #[ MergeWithFloat :
01752
01753     Note that we always park the result on top of term1.
01754     This makes life easier, because the original AddRat in MergePatches
01755     does this as well.
01756 */
01757
01758 int MergeWithFloat(PHEAD WORD **interm1, WORD **interm2)
01759 {
01760     GETBIDENTITY
01761     WORD *coef1, *coef2, size1, size2, *fun1, *fun2, *fun3, *tt;
01762     WORD sign3, jj, *t1, *t2, i, *term1 = *interm1, *term2 = *interm2;
01763     int retval = 0;
01764     coef1 = term1+*term1; size1 = coef1[-1]; coef1 -= ABS(size1);
01765     coef2 = term2+*term2; size2 = coef2[-1]; coef2 -= ABS(size2);
01766     if ( AT.SortFloatMode == 3 ) {
01767         fun1 = term1+1; while ( fun1 < coef1 && fun1[0] != FLOATFUN ) fun1 += fun1[1];
01768         fun2 = term2+1; while ( fun2 < coef2 && fun2[0] != FLOATFUN ) fun2 += fun2[1];
01769         UnpackFloat(aux1, fun1);
01770         if ( size1 < 0 ) mpf_neg(aux1, aux1);
01771         UnpackFloat(aux2, fun2);
01772         if ( size2 < 0 ) mpf_neg(aux2, aux2);
01773     }
01774     else if ( AT.SortFloatMode == 1 ) {
01775         fun1 = term1+1; while ( fun1 < coef1 && fun1[0] != FLOATFUN ) fun1 += fun1[1];
01776         UnpackFloat(aux1, fun1);
01777         if ( size1 < 0 ) mpf_neg(aux1, aux1);
01778         fun2 = coef2;
01779         RatToFloat(aux2, (UWORD *)coef2, size2);
01780     }
01781     else if ( AT.SortFloatMode == 2 ) {
01782         fun2 = term2+1; while ( fun2 < coef2 && fun2[0] != FLOATFUN ) fun2 += fun2[1];
01783         fun1 = coef1;
01784         RatToFloat(aux1, (UWORD *)coef1, size1);
01785         UnpackFloat(aux2, fun2);
01786         if ( size2 < 0 ) mpf_neg(aux2, aux2);
01787     }
01788     else {
01789         MLOCK(ErrorMessageLock);
01790         MesPrint("Illegal value %d for AT.SortFloatMode in MergeWithFloat.", AT.SortFloatMode);
01791         MUNLOCK(ErrorMessageLock);
01792         Terminate(-1);
01793         return(0);
01794     }
01795     mpf_add(aux3, aux1, aux2);
01796     sign3 = mpf_sgn(aux3);
01797 /*
01798     Now check whether we can park the result on top of one of the input terms.
01799 */
01800     if ( sign3 < 0 ) mpf_neg(aux3, aux3);
01801     fun3 = TermMalloc("MergeWithFloat");
01802     PackFloat(fun3, aux3);
01803     if ( AT.SortFloatMode == 3 ) {
01804         if ( fun1[1] + ABS(size1) == fun3[1] + 3 ) {
01805 OnTopOf1:   t1 = fun3; t2 = fun1;
01806             for ( i = 0; i < fun3[1]; i++ ) *t2++ = *t1++;
01807             *t2++ = 1; *t2++ = 1; *t2++ = sign3 < 0 ? -3: 3;
01808             retval = 1;
01809         }
01810         else if ( fun1[1] + ABS(size1) > fun3[1] + 3 ) {
01811 Shift1:     t2 = term1 + *term1; tt = t2;
01812             *--t2 = sign3 < 0 ? -3: 3; *--t2 = 1; *--t2 = 1;
01813             t1 = fun3 + fun3[1]; for ( i = 0; i < fun3[1]; i++ ) *--t2 = *--t1;
01814             t1 = fun1;
01815             while ( t1 > term1 ) *--t2 = *--t1;
01816             *t2 = tt-t2; term1 = t2;
01817             retval = 1;
01818         }
01819         else { /* Here we have to move term1 to the left to make room. */
01820             jj = fun3[1]-fun1[1]+3-ABS(size1); /* This is positive */
01821 Over1:      t2 = term1-jj; t1 = term1;
01822             while ( t1 < fun1 ) *t2++ = *t1++;
01823             term1 -= jj;
01824             *term1 += jj;
01825             for ( i = 0; i < fun3[1]; i++ ) *t2++ = fun3[i];
01826             *t2++ = 1; *t2++ = 1; *t2++ = sign3 < 0 ? -3: 3;
01827             retval = 1;
01828         }
01829     }

```

```

01830     else if ( AT.SortFloatMode == 1 ) {
01831         if ( fun1[1] + ABS(size1) == fun3[1] + 3 ) goto OnTopOf1;
01832     else if ( fun1[1] + ABS(size1) > fun3[1] + 3 ) goto Shift1;
01833     else {
01834         jj = fun3[1]-fun1[1]+3-ABS(size1); /* This is positive */
01835         goto Over1;
01836     }
01837 }
01838 else { /* Can only be 2, based on previous tests */
01839     if ( fun3[1] + 3 == ABS(size1) ) goto OnTopOf1;
01840     else if ( fun3[1] + 3 < ABS(size1) ) goto Shift1;
01841     else {
01842         jj = fun3[1]+3-ABS(size1); /* This is positive */
01843         goto Over1;
01844     }
01845 }
01846 *interm1 = term1;
01847 TermFree(fun3,"MergeWithFloat");
01848 AT.SortFloatMode = 0;
01849 return(retval);
01850 }
01851
01852 /*
01853     #] MergeWithFloat :
01854     #] Sorting :
01855     #[ MZV :
01856
01857     The functions here allow the arbitrary precision calculation
01858     of MZV's and Euler sums.
01859     They are called when the functions mzv_ and/or euler_ are used
01860     and the evaluate statement is applied.
01861     The output is in a float_ function.
01862     The expand statement tries to express the functions in terms of a basis.
01863     The bases are the 'standard basis for the euler sums and the
01864     pushdown bases from the datamine, unless otherwise specified.
01865
01866     #[ SimpleDelta :
01867 */
01868
01869 void SimpleDelta(mpf_t sum, int m)
01870 {
01871     long s = 1;
01872     long prec = AC.DefaultPrecision;
01873     unsigned long xprec = (unsigned long)prec, x;
01874     int j, jmax, n;
01875     mpf_t jm, jjm;
01876     mpf_init(jm); mpf_init(jjm);
01877     if ( m < 0 ) { s = -1; m = -m; }
01878
01879 /*
01880     We will loop until 1/2^j/j^m is smaller than the default precision.
01881     Just running to prec is however overkill, specially when m is large.
01882     We try to estimate a better value.
01883     jmax = prec - ((log2(prec)-1)*m).
01884     Hence we need the leading bit of prec.
01885     We are still overshooting a bit.
01886 */
01887     n = 0; x = xprec;
01888     while ( x ) { x >>= 1; n++; }
01889 /*
01890     We have now n = floor(log2(x))+1.
01891 */
01892     n--;
01893     jmax = (int)((int)xprec - (n-1)*m);
01894 /*
01895     For small prec and large m, the estimate can be wrong and even be negative,
01896     so we increase jmax until jmax + m*log2(jmax) > prec
01897 */
01898     if ( jmax < 0 ) jmax = 1;
01899     do {
01900         n = 0;
01901         x = (unsigned long)jmax;
01902         while (x) { x >>= 1; n++; }
01903         n--; // floor(log2(jmax))
01904         jmax++;
01905     } while ( jmax + m * n <= prec );
01906     mpf_set_ui(sum,0);
01907     for ( j = 1; j <= jmax; j++ ) {
01908 #ifdef WITHCUTOFF
01909         xprec--;
01910         mpf_set_prec_raw(jm,xprec);
01911         mpf_set_prec_raw(jjm,xprec);
01912 #endif
01913         mpf_set_ui(jm,1L);
01914         mpf_div_ui(jjm,jm,(unsigned long)j);
01915         mpf_pow_ui(jm,jjm,(unsigned long)m);
01916         mpf_div_2exp(jjm,jm,(unsigned long)j);

```

```

01917         if ( s == -1 && j%2 == 1 ) mpf_sub(sum,sum,jjm);
01918     else                                     mpf_add(sum,sum,jjm);
01919 }
01920 mpf_clear(jjm); mpf_clear(jm);
01921 }
01922
01923 /*
01924     #] SimpleDelta :
01925     #[ SimpleDeltaC :
01926 */
01927
01928 void SimpleDeltaC(mpf_t sum, int m)
01929 {
01930     long s = 1;
01931     long prec = AC.DefaultPrecision;
01932     unsigned long xprec = (unsigned long)prec, x;
01933     int j, jmax, n;
01934     mpf_t jm,jjm;
01935     mpf_init(jm); mpf_init(jjm);
01936     if ( m < 0 ) { s = -1; m = -m; }
01937 /*
01938     We will loop until  $1/2^j/j^m$  is smaller than the default precision.
01939     Just running to prec is however overkill, specially when m is large.
01940     We try to estimate a better value.
01941     jmax = prec - ((log2(prec)-1)*m).
01942     Hence we need the leading bit of prec.
01943     We are still overshooting a bit.
01944 */
01945     n = 0; x = xprec;
01946     while ( x ) { x >>= 1; n++; }
01947 /*
01948     We have now n = floor(log2(x))+1.
01949 */
01950     n--;
01951     jmax = (int)((int)xprec - (n-1)*m);
01952 /*
01953     For small prec and large m, the estimate can be wrong and even be negative,
01954     so we increase jmax until jmax + m*log2(jmax) > prec
01955 */
01956     if ( jmax < 0 ) jmax = 1;
01957     do {
01958         n = 0;
01959         x = (unsigned long)jmax;
01960         while (x) { x >>= 1; n++; }
01961         n--; // floor(log2(jmax))
01962         jmax++;
01963     } while ( jmax + m * n <= prec );
01964     if ( s < 0 ) jmax /= 2;
01965     mpf_set_si(sum,0L);
01966     for ( j = 1; j <= jmax; j++ ) {
01967 #ifdef WITHCUTOFF
01968         xprec--;
01969         mpf_set_prec_raw(jm,xprec);
01970         mpf_set_prec_raw(jjm,xprec);
01971 #endif
01972         mpf_set_ui(jm,1L);
01973         mpf_div_ui(jjm,jm,(unsigned long)j);
01974         mpf_pow_ui(jm,jjm,(unsigned long)m);
01975         if ( s == -1 ) mpf_div_2exp(jjm,jm,2*(unsigned long)j);
01976         else          mpf_div_2exp(jjm,jm,(unsigned long)j);
01977         mpf_add(sum,sum,jjm);
01978     }
01979     mpf_clear(jjm); mpf_clear(jm);
01980 }
01981
01982 /*
01983     #] SimpleDeltaC :
01984     #[ SingleTable :
01985 */
01986
01987 void SingleTable(mpf_t *tabl, int N, int m, int pow)
01988 {
01989 /*
01990     Creates a table T(1,...,N) with
01991         T(i) = sum_(j,i,N,[sign_(j)]/2^j/j^m)
01992     To make this table we have two options:
01993     1: run the sum backwards with the potential problem that the
01994        precision is difficult to manage.
01995     2: run the sum forwards. Take sum_(j,1,i-1,...) and later subtract.
01996     When doing Euler sums we may need also 1/4^j
01997     pow: 1 -> 1/2^j
01998         2 -> 1/4^j
01999 */
02000     GETIDENTITY
02001     long s = 1;
02002     int j;
02003 #ifdef WITHCUTOFF

```



```

02004     long prec = mpf_get_default_prec();
02005 #endif
02006     mpf_t jm, jjm;
02007     mpf_init(jm); mpf_init(jjm);
02008     if ( pow < 1 || pow > 2 ) {
02009         printf("Wrong parameter pow in SingleTable: %d\n",pow);
02010         exit(-1);
02011     }
02012     if ( m < 0 ) { m = -m; s = -1; }
02013     mpf_set_si(auxsum,0L);
02014     for ( j = N; j > 0; j-- ) {
02015 #ifdef WITHCUTOFF
02016         mpf_set_prec_raw(jm,prec-j);
02017         mpf_set_prec_raw(jjm,prec-j);
02018 #endif
02019         mpf_set_ui(jm,1L);
02020         mpf_div_ui(jjm,jm,(unsigned long)j);
02021         mpf_pow_ui(jm,jjm,(unsigned long)m);
02022         mpf_div_2exp(jjm,jm,pow*(unsigned long)j);
02023         if ( pow == 2 ) mpf_add(auxsum,auxsum,jjm);
02024         else if ( s == -1 && j%2 == 1 ) mpf_sub(auxsum,auxsum,jjm);
02025         else mpf_add(auxsum,auxsum,jjm);
02026 /*
02027         And now copy auxsum to tablelement j
02028 */
02029         mpf_set(tabl[j],auxsum);
02030     }
02031     mpf_clear(jjm); mpf_clear(jm);
02032 }
02033
02034 /*
02035     #] SingleTable :
02036     #[ DoubleTable :
02037 */
02038
02039 void DoubleTable(mpf_t *tabout, mpf_t *tabin, int N, int m, int pow)
02040 {
02041     GETIDENTITY
02042     long s = 1;
02043 #ifdef WITHCUTOFF
02044     long prec = mpf_get_default_prec();
02045 #endif
02046     int j;
02047     mpf_t jm, jjm;
02048     mpf_init(jm); mpf_init(jjm);
02049     if ( pow < -1 || pow > 2 ) {
02050         printf("Wrong parameter pow in SingleTable: %d\n",pow);
02051         exit(-1);
02052     }
02053     if ( m < 0 ) { m = -m; s = -1; }
02054     mpf_set_ui(auxsum,0L);
02055     for ( j = N; j > 0; j-- ) {
02056 #ifdef WITHCUTOFF
02057         mpf_set_prec_raw(jm,prec-j);
02058         mpf_set_prec_raw(jjm,prec-j);
02059 #endif
02060         mpf_set_ui(jm,1L);
02061         mpf_div_ui(jjm,jm,(unsigned long)j);
02062         mpf_pow_ui(jm,jjm,(unsigned long)m);
02063         if ( pow == -1 ) {
02064             mpf_mul_2exp(jjm,jm,(unsigned long)j);
02065             mpf_mul(jm,jjm,tabin[j+1]);
02066         }
02067         else if ( pow > 0 ) {
02068             mpf_div_2exp(jjm,jm,pow*(unsigned long)j);
02069             mpf_mul(jm,jjm,tabin[j+1]);
02070         }
02071         else {
02072             mpf_mul(jm,jm,tabin[j+1]);
02073         }
02074         if ( pow == 2 ) mpf_add(auxsum,auxsum,jm);
02075         else if ( s == -1 && j%2 == 1 ) mpf_sub(auxsum,auxsum,jm);
02076         else mpf_add(auxsum,auxsum,jm);
02077 /*
02078         And now copy auxsum to tablelement j
02079 */
02080         mpf_set(tabout[j],auxsum);
02081     }
02082     mpf_clear(jjm); mpf_clear(jm);
02083 }
02084
02085 /*
02086     #] DoubleTable :
02087     #[ EndTable :
02088 */
02089
02090 void EndTable(mpf_t sum, mpf_t *tabin, int N, int m, int pow)

```

```

02091 {
02092     long s = 1;
02093     #ifdef WITHCUTOFF
02094         long prec = mpf_get_default_prec();
02095     #endif
02096     int j;
02097     mpf_t jm, jjm;
02098     mpf_init(jm); mpf_init(jjm);
02099     if ( pow < -1 || pow > 2 ) {
02100         printf("Wrong parameter pow in SingleTable: %d\n", pow);
02101         exit(-1);
02102     }
02103     if ( m < 0 ) { m = -m; s = -1; }
02104     mpf_set_si(sum, 0L);
02105     for ( j = N; j > 0; j-- ) {
02106     #ifdef WITHCUTOFF
02107         mpf_set_prec_raw(jm, prec-j);
02108         mpf_set_prec_raw(jjm, prec-j);
02109     #endif
02110         mpf_set_ui(jm, 1L);
02111         mpf_div_ui(jjm, jm, (unsigned long)j);
02112         mpf_pow_ui(jm, jjm, (unsigned long)m);
02113         if ( pow == -1 ) {
02114             mpf_mul_2exp(jjm, jm, (unsigned long)j);
02115             mpf_mul(jm, jjm, tabin[j+1]);
02116         }
02117         else if ( pow > 0 ) {
02118             mpf_div_2exp(jjm, jm, pow+(unsigned long)j);
02119             mpf_mul(jm, jjm, tabin[j+1]);
02120         }
02121         else {
02122             mpf_mul(jm, jm, tabin[j+1]);
02123         }
02124         if ( s == -1 && j%2 == 1 ) mpf_sub(sum, sum, jm);
02125         else mpf_add(sum, sum, jm);
02126     }
02127     mpf_clear(jjm); mpf_clear(jm);
02128 }
02129
02130 /*
02131     #] EndTable :
02132     #[ deltaMZV :
02133 */
02134
02135 void deltaMZV(mpf_t result, WORD *indexes, int depth)
02136 {
02137     GETIDENTITY
02138     /*
02139     Because all sums go roughly like 1/2^j we need about depth steps.
02140     */
02141     /* MesPrint("deltaMZV(%a)", depth, indexes); */
02142     if ( depth == 1 ) {
02143         if ( indexes[0] == 1 ) {
02144             mpf_set(result, mpfdelta1);
02145             return;
02146         }
02147         SimpleDelta(result, indexes[0]);
02148     }
02149     else if ( depth == 2 ) {
02150         if ( indexes[0] == 1 && indexes[1] == 1 ) {
02151             mpf_pow_ui(result, mpfdelta1, 2);
02152             mpf_div_2exp(result, result, 1);
02153         }
02154         else {
02155             SingleTable(mpftab1, AC.DefaultPrecision-AC.MaxWeight+1, indexes[0], 1);
02156             EndTable(result, mpftab1, AC.DefaultPrecision-AC.MaxWeight, indexes[1], 0);
02157         };
02158     }
02159     else if ( depth > 2 ) {
02160         mpf_t *mpftab3;
02161         int d;
02162     /*
02163         Check first whether this is a power of delta1 = ln(2)
02164     */
02165         for ( d = 0; d < depth; d++ ) {
02166             if ( indexes[d] != 1 ) break;
02167         }
02168         if ( d == depth ) { /* divide by fac_(depth) */
02169             mpf_pow_ui(result, mpfdelta1, depth);
02170             for ( d = 2; d <= depth; d++ ) {
02171                 mpf_div_ui(result, result, (unsigned long)d);
02172             }
02173         }
02174         else {
02175             d = depth-1;
02176             SingleTable(mpftab1, AC.DefaultPrecision-AC.MaxWeight+d, *indexes, 1);
02177             d--; indexes++;

```

```

02178         for(;;) {
02179             DoubleTable(mpftab2,mpftab1,AC.DefaultPrecision-AC.MaxWeight+d,*indexes,0);
02180             d--; indexes++;
02181             if ( d == 0 ) {
02182                 EndTable(result,mpftab2,AC.DefaultPrecision-AC.MaxWeight,*indexes,0);
02183                 break;
02184             }
02185             mpftab3 = (mpf_t *)AT.mpf_tab1; AT.mpf_tab1 = AT.mpf_tab2;
02186             AT.mpf_tab2 = (void *)mpftab3;
02187         }
02188     }
02189 }
02190 else if ( depth == 0 ) {
02191     mpf_set_ui(result,1L);
02192 }
02193 }
02194
02195 /*
02196     #] deltaMZV :
02197     #[ deltaEuler :
02198
02199     Regular Euler delta with - signs, but everywhere 1/2^j
02200 */
02201
02202 void deltaEuler(mpf_t result, WORD *indexes, int depth)
02203 {
02204     GETIDENTITY
02205     int m;
02206 #ifdef DEBUG
02207     int i;
02208     printf(" deltaEuler(");
02209     for ( i = 0; i < depth; i++ ) {
02210         if ( i != 0 ) printf(",");
02211         printf("%d",indexes[i]);
02212     }
02213     printf(") = ");
02214 #endif
02215     if ( depth == 1 ) {
02216         SimpleDelta(result,indexes[0]);
02217     }
02218     else if ( depth == 2 ) {
02219         SingleTable(mpftab1,AC.DefaultPrecision-AC.MaxWeight+1,indexes[0],1);
02220         m = indexes[1]; if ( indexes[0] < 0 ) m = -m;
02221         EndTable(result,mpftab1,AC.DefaultPrecision-AC.MaxWeight,m,0);
02222     }
02223     else if ( depth > 2 ) {
02224         int d;
02225         mpf_t *mpftab3;
02226         d = depth-1;
02227         SingleTable(mpftab1,AC.DefaultPrecision-AC.MaxWeight+d,*indexes,1);
02228         d--; indexes++;
02229         m = *indexes; if ( indexes[-1] < 0 ) m = -m;
02230         for(;;) {
02231             DoubleTable(mpftab2,mpftab1,AC.DefaultPrecision-AC.MaxWeight+d,m,0);
02232             d--; indexes++;
02233             m = *indexes; if ( indexes[-1] < 0 ) m = -m;
02234             if ( d == 0 ) {
02235                 EndTable(result,mpftab2,AC.DefaultPrecision-AC.MaxWeight,m,0);
02236                 break;
02237             }
02238             mpftab3 = (mpf_t *)AT.mpf_tab1; AT.mpf_tab1 = AT.mpf_tab2;
02239             AT.mpf_tab2 = (void *)mpftab3;
02240         }
02241     }
02242     else if ( depth == 0 ) {
02243         mpf_set_ui(result,1L);
02244     }
02245 #ifdef DEBUG
02246     gmp_printf("%.4Fe\n",40,result);
02247 #endif
02248 }
02249
02250 /*
02251     #] deltaEuler :
02252     #[ deltaEulerC :
02253
02254     Conjugate Euler delta without - signs, but possibly 1/4^j
02255     When there is a - in the string we have 1/4.
02256 */
02257
02258 void deltaEulerC(mpf_t result, WORD *indexes, int depth)
02259 {
02260     GETIDENTITY
02261     int m;
02262 #ifdef DEBUG
02263     int i;
02264     printf(" deltaEulerC(");

```

```

02265     for ( i = 0; i < depth; i++ ) {
02266         if ( i != 0 ) printf(",");
02267         printf("%d",indexes[i]);
02268     }
02269     printf(") = ");
02270 #endif
02271     mpf_set_ui(result,0);
02272     if ( depth == 1 ) {
02273         if ( indexes[0] == 0 ) {
02274             printf("Illegal index in depth=1 deltaEulerC: %d\n",indexes[0]);
02275         }
02276         if ( indexes[0] < 0 ) SimpleDeltaC(result,indexes[0]);
02277         else SimpleDelta(result,indexes[0]);
02278     }
02279     else if ( depth == 2 ) {
02280         int par;
02281         m = indexes[0];
02282         if ( m < 0 ) SingleTable(mpftab1,AC.DefaultPrecision-AC.MaxWeight+depth,-m,2);
02283         else SingleTable(mpftab1,AC.DefaultPrecision-AC.MaxWeight+depth, m,1);
02284         m = indexes[1];
02285         if ( m < 0 ) { m = -m; par = indexes[0] < 0 ? 0: 1; }
02286         else { par = indexes[0] < 0 ? -1: 0; }
02287         EndTable(result,mpftab1,AC.DefaultPrecision-AC.MaxWeight,m,par);
02288     }
02289     else if ( depth > 2 ) {
02290         int d, par;
02291         mpf_t *mpftab3;
02292         d = depth-1;
02293         m = indexes[0];
02294         ZeroTable(mpftab1,AC.DefaultPrecision+1);
02295         if ( m < 0 ) SingleTable(mpftab1,AC.DefaultPrecision-AC.MaxWeight+d+1,-m,2);
02296         else SingleTable(mpftab1,AC.DefaultPrecision-AC.MaxWeight+d+1, m,1);
02297         d--; indexes++; m = indexes[0];
02298         if ( m < 0 ) { m = -m; par = indexes[-1] < 0 ? 0: 1; }
02299         else { par = indexes[-1] < 0 ? -1: 0; }
02300         for(;;) {
02301             ZeroTable(mpftab2,AC.DefaultPrecision-AC.MaxWeight+d);
02302             DoubleTable(mpftab2,mpftab1,AC.DefaultPrecision-AC.MaxWeight+d,m,par);
02303             d--; indexes++; m = indexes[0];
02304             if ( m < 0 ) { m = -m; par = indexes[-1] < 0 ? 0: 1; }
02305             else { par = indexes[-1] < 0 ? -1: 0; }
02306             if ( d == 0 ) {
02307                 mpf_set_ui(result,0);
02308                 EndTable(result,mpftab2,AC.DefaultPrecision-AC.MaxWeight,m,par);
02309                 break;
02310             }
02311             mpftab3 = (mpf_t *)AT.mpf_tab1; AT.mpf_tab1 = AT.mpf_tab2;
02312             AT.mpf_tab2 = (void *)mpftab3;
02313         }
02314     }
02315     else if ( depth == 0 ) {
02316         mpf_set_ui(result,1L);
02317     }
02318 #ifdef DEBUG
02319     gmp_printf("%.Fe\n",40,result);
02320 #endif
02321 }
02322
02323 /*
02324     #] deltaEulerC :
02325     #[ CalculateMZVhalf :
02326
02327     This routine is mainly for support when large numbers of
02328     MZV's have to be calculated at the same time.
02329 */
02330
02331 void CalculateMZVhalf(mpf_t result, WORD *indexes, int depth)
02332 {
02333     int i;
02334     if ( depth < 0 ) {
02335         printf("Illegal depth in CalculateMZVhalf: %d\n",depth);
02336         exit(-1);
02337     }
02338     for ( i = 0; i < depth; i++ ) {
02339         if ( indexes[i] <= 0 ) {
02340             printf("Illegal index[%d] in CalculateMZVhalf: %d\n",i,indexes[i]);
02341             exit(-1);
02342         }
02343     }
02344     deltaMZV(result,indexes,depth);
02345 }
02346
02347 /*
02348     #] CalculateMZVhalf :
02349     #[ CalculateMZV :
02350 */
02351

```

```

02352 void CalculateMZV(mpf_t result, WORD *indexes, int depth)
02353 {
02354     GETIDENTITY
02355     int num1, num2 = 0, i, j = 0;
02356     if ( depth < 0 ) {
02357         printf("Illegal depth in CalculateMZV: %d\n",depth);
02358         exit(-1);
02359     }
02360     if ( indexes[0] == 1 ) {
02361         printf("Divergent MZV in CalculateMZV\n");
02362         exit(-1);
02363     }
02364     /* MesPrint("calculateMZV(%a)",depth,indexes); */
02365     for ( i = 0; i < depth; i++ ) {
02366         if ( indexes[i] <= 0 ) {
02367             printf("Illegal index[%d] in CalculateMZV: %d\n",i,indexes[i]);
02368             exit(-1);
02369         }
02370         AT.indi1[i] = indexes[i];
02371     }
02372     num1 = depth; i = 0;
02373     deltaMZV(result,indexes,depth);
02374     for(;;) {
02375         if ( AT.indi1[0] > 1 ) {
02376             AT.indi1[0] -= 1;
02377             for ( j = num2; j > 0; j-- ) AT.indi2[j] = AT.indi2[j-1];
02378             AT.indi2[0] = 1; num2++;
02379         }
02380         else {
02381             AT.indi2[0] += 1;
02382             for ( j = 1; j < num1; j++ ) AT.indi1[j-1] = AT.indi1[j];
02383             num1--;
02384             if ( num1 == 0 ) break;
02385         }
02386         deltaMZV(aux1,AT.indi1,num1);
02387         deltaMZV(aux2,AT.indi2,num2);
02388         mpf_mul(aux3,aux1,aux2);
02389         mpf_add(result,result,aux3);
02390     }
02391     deltaMZV(aux3,AT.indi2,num2);
02392     mpf_add(result,result,aux3);
02393 }
02394
02395 /*
02396     #] CalculateMZV :
02397     #[ CalculateEuler :
02398
02399     There is a problem of notation here.
02400     Basically there are two notations.
02401     1:  $Z(m1,m2,m3) = \sum_{j3,1,inf,sign\_}(m3) / j3^{abs\_}(m3) * \sum_{j2,j3+1,inf,sign\_}(m2) / j2^{abs\_}(m2) * \sum_{j1,j2+1,inf,sign\_}(m1) / j1^{abs\_}(m1) ) )$ 
02402
02403     See Broadhurst,1996
02404     2:  $L(m1,m2,m3) = \sum_{j1,1,inf,sign\_}(m1) * \sum_{j2,1,inf,sign\_}(m2) * \sum_{j3,1,inf,sign\_}(m3) / j3^{abs\_}(m3) / (j2+j3)^{abs\_}(m2) / (j1+j2+j3)^{abs\_}(m1) ) )$ 
02405
02406     See Borwein, Bradley, Broadhurst and Lisonek, 1999
02407     The L corresponds with the H of the datamine up to sign_(m1*m2*m3)
02408     The algorithm follows 2, but the more common notation is 1.
02409     Hence we start with a conversion.
02410 */
02411
02412 void CalculateEuler(mpf_t result, WORD *Zindexes, int depth)
02413 {
02414     GETIDENTITY
02415     int s1, num1, num2, i, j;
02416
02417     WORD *indexes = AT.WorkPointer;
02418     for ( i = 0; i < depth; i++ ) indexes[i] = Zindexes[i];
02419     for ( i = 0; i < depth-1; i++ ) {
02420         if ( Zindexes[i] < 0 ) {
02421             for ( j = i+1; j < depth; j++ ) indexes[j] = -indexes[j];
02422         }
02423     }
02424
02425     if ( depth < 0 ) {
02426         printf("Illegal depth in CalculateEuler: %d\n",depth);
02427         exit(-1);
02428     }
02429
02430     if ( indexes[0] == 1 ) {
02431         printf("Divergent Euler sum in CalculateEuler\n");
02432         exit(-1);
02433     }
02434
02435     for ( i = 0, j = 0; i < depth; i++ ) {

```

```

02439         if ( indexes[i] == 0 ) {
02440             printf("Illegal index[%d] in CalculateEuler: %d\n",i,indexes[i]);
02441             exit(-1);
02442         }
02443         if ( indexes[i] < 0 ) j = 1;
02444         AT.indi1[i] = indexes[i];
02445     }
02446     if ( j == 0 ) {
02447         CalculateMZV(result,indexes,depth);
02448         return;
02449     }
02450     num1 = depth; AT.indi2[0] = 0; num2 = 0;
02451     deltaEuler(result,AT.indi1,depth);
02452     s1 = 0;
02453     for(;;) {
02454         s1++;
02455         if ( AT.indi1[0] > 1 ) {
02456             AT.indi1[0] -= 1;
02457             for ( j = num2; j > 0; j-- ) AT.indi2[j] = AT.indi2[j-1];
02458             AT.indi2[0] = 1; num2++;
02459         }
02460         else if ( AT.indi1[0] < -1 ) {
02461             AT.indi1[0] += 1;
02462             for ( j = num2; j > 0; j-- ) AT.indi2[j] = AT.indi2[j-1];
02463             AT.indi2[0] = 1; num2++;
02464         }
02465         else if ( AT.indi1[0] == -1 ) {
02466             for ( j = num2; j > 0; j-- ) AT.indi2[j] = AT.indi2[j-1];
02467             AT.indi2[0] = -1; num2++;
02468             for ( j = 1; j < num1; j++ ) AT.indi1[j-1] = AT.indi1[j];
02469             num1--;
02470         }
02471         else {
02472             AT.indi2[0] = AT.indi2[0] < 0 ? AT.indi2[0]-1: AT.indi2[0]+1;
02473             for ( j = 1; j < num1; j++ ) AT.indi1[j-1] = AT.indi1[j];
02474             num1--;
02475         }
02476         if ( num1 == 0 ) break;
02477         deltaEuler(aux1,AT.indi1,num1);
02478         deltaEulerC(aux2,AT.indi2,num2);
02479         mpf_mul(aux3,aux1,aux2);
02480         if ( (depth+num1+num2+s1)%2 == 0 ) mpf_add(result,result,aux3);
02481         else mpf_sub(result,result,aux3);
02482     }
02483     deltaEulerC(aux3,AT.indi2,num2);
02484     if ( (depth+num2+s1)%2 == 0 ) mpf_add(result,result,aux3);
02485     else mpf_sub(result,result,aux3);
02486 }
02487
02488 /*
02489     #] CalculateEuler :
02490     #[ ExpandMZV :
02491 */
02492
02493 int ExpandMZV(WORD *term, WORD level)
02494 {
02495     DUMMYUSE(term);
02496     DUMMYUSE(level);
02497     return(0);
02498 }
02499
02500 /*
02501     #] ExpandMZV :
02502     #[ ExpandEuler :
02503 */
02504
02505 int ExpandEuler(WORD *term, WORD level)
02506 {
02507     DUMMYUSE(term);
02508     DUMMYUSE(level);
02509     return(0);
02510 }
02511
02512 /*
02513     #] ExpandEuler :
02514     #[ EvaluateEuler :
02515
02516     There are various steps here:
02517     1: locate an Euler function.
02518     2: evaluate it into a float.
02519     3: convert the coefficient to a float and multiply.
02520     4: Put the new term together.
02521     5: Restart to see whether there are more Euler functions.
02522     The compiler should check that there is no conflict between
02523     the evaluate command and a potential polyfun or polyratfun.
02524     Yet, when reading in expressions there can be a conflict.
02525     Hence the Normalize routine should check as well.

```

```

02526
02527     par == MZV: MZV
02528     par == EULER: Euler
02529     par == MZVHALF: MZV sums in 1/2 rather than 1. -> deltaMZV.
02530     par == ALLMZVFUNCTIONS: all of the above.
02531 */
02532
02533 int EvaluateEuler(PHEAD WORD *term, WORD level, WORD par)
02534 {
02535     WORD *t, *tstop, *tt, *tnext, sumweight, depth, first = 1, *newterm, i;
02536     WORD *oldworkpointer = AT.WorkPointer, nsize, *indexes;
02537     int retval;
02538     tstop = term + *term; tstop -= ABS(tstop[-1]);
02539     if ( AT.WorkPointer < term+*term ) AT.WorkPointer = term + *term;
02540 /*
02541     Step 1. We also need to verify that the argument we find is legal
02542 */
02543     t = term+1;
02544     while ( t < tstop ) {
02545         if ( ( *t == par ) || ( ( par == ALLMZVFUNCTIONS ) && (
02546             *t == MZV || *t == EULER || *t == MZVHALF ) ) ) {
02547             /* all arguments should be small integers */
02548             indexes = AT.WorkPointer;
02549             sumweight = 0; depth = 0;
02550             tnext = t + t[1]; tt = t + FUNHEAD;
02551             while ( tt < tnext ) {
02552                 if ( *tt != -SNUMBER ) goto nextfun;
02553                 if ( tt[1] == 0 ) goto nextfun;
02554                 indexes[depth] = tt[1];
02555                 sumweight += ABS(tt[1]); depth++;
02556                 tt += 2;
02557             }
02558             /* euler sum without arguments, i.e. mzv_(), euler_() or mzvhalf_() */
02559             if ( depth == 0 ) goto nextfun;
02560             if ( sumweight > AC.MaxWeight ) {
02561                 MesPrint("Error: Weight of Euler/MZV sum greater than %d",sumweight);
02562                 MesPrint("Please increase MaxWeight in form.set.");
02563                 Terminate(-1);
02564             }
02565 /*
02566             Step 2: evaluate:
02567 */
02568             AT.WorkPointer += depth;
02569             if ( first ) {
02570                 if ( *t == MZV ) CalculateMZV(aux4,indexes,depth);
02571                 else if ( *t == EULER ) CalculateEuler(aux4,indexes,depth);
02572                 else if ( *t == MZVHALF ) CalculateMZVhalf(aux4,indexes,depth);
02573                 first = 0;
02574             }
02575             else {
02576                 if ( *t == MZV ) CalculateMZV(aux5,indexes,depth);
02577                 else if ( *t == EULER ) CalculateEuler(aux5,indexes,depth);
02578                 else if ( *t == MZVHALF ) CalculateMZVhalf(aux5,indexes,depth);
02579                 mpf_mul(aux4,aux4,aux5);
02580             }
02581             *t = 0;
02582         }
02583     nextfun:
02584         t += t[1];
02585     }
02586     if ( first == 1 ) return(Generator(BHEAD term,level));
02587 /*
02588     Step 3:
02589     Now the regular coefficient, if it is not 1/1.
02590     We have two cases: size +- 3, or bigger.
02591 */
02592     nsize = term[*term-1];
02593     if ( nsize < 0 ) {
02594         mpf_neg(aux4,aux4);
02595         nsize = -nsize;
02596     }
02597     if ( nsize == 3 ) {
02598         if ( tstop[0] != 1 ) {
02599             mpf_mul_ui(aux4,aux4, (ULONG) ((UWORD)tstop[0]));
02600         }
02601         if ( tstop[1] != 1 ) {
02602             mpf_div_ui(aux4,aux4, (ULONG) ((UWORD)tstop[1]));
02603         }
02604     }
02605     else {
02606         RatToFloat(aux5, (UWORD *)tstop,nsize);
02607         mpf_mul(aux4,aux4,aux5);
02608     }
02609 /*
02610     Now we have to locate possible other float_ functions.
02611 */
02612     t = term+1;

```

```

02613     while ( t < tstop ) {
02614         if ( *t == FLOATFUN ) {
02615             UnpackFloat(aux5,t);
02616             mpf_mul(aux4,aux4,aux5);
02617         }
02618         t += t[1];
02619     }
02620 /*
02621     Now we should compose the new term in the Workspace.
02622 */
02623     t = term+1;
02624     newterm = AT.WorkPointer;
02625     tt = newterm+1;
02626     while ( t < tstop ) {
02627         if ( *t == 0 || *t == FLOATFUN ) t += t[1];
02628         else {
02629             i = t[1]; NCOPY(tt,t,i);
02630         }
02631     }
02632     PackFloat(tt,aux4);
02633     tt += tt[1];
02634     *tt++ = 1; *tt++ = 1; *tt++ = 3;
02635     *newterm = tt-newterm;
02636     AT.WorkPointer = tt;
02637     retval = Generator(BHEAD newterm,level);
02638     AT.WorkPointer = oldworkpointer;
02639     return(retval);
02640 }
02641
02642 /*
02643     #] EvaluateEuler :
02644     #] MZV :
02645     #[ Functions :
02646         #[ CoEvaluate :
02647
02648         Current subkeys: mzv_, euler_ and sqrt_.
02649 */
02650
02651 int CoEvaluate(UBYTE *s)
02652 {
02653     GETIDENTITY
02654     UBYTE *subkey, c;
02655     WORD numfun, type;
02656     int error = 0;
02657     if ( AT.aux_ == 0 ) {
02658         MesPrint("%Illegal attempt to evaluate a function without activating floating point
02659 numbers.");
02659         MesPrint("%Forgotten %#startfloat instruction?");
02660         return(1);
02661     }
02662     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02663     if ( *s == 0 ) {
02664 /*
02665         No subkey, which means all functions.
02666 */
02667         Add3Com(TYPEEEVALUATE,ALLFUNCTIONS);
02668 /*
02669         The MZV, EULER and MZVHALF are done separately
02670 */
02671         Add3Com(TYPEEEVALUATE,ALLMZVFUNCTIONS);
02672         return(0);
02673     }
02674     while ( *s ) {
02675         subkey = s;
02676         while ( FG.cTable[*s] == 0 ) s++;
02677         if ( *s == '2' ) s++; /* cases li2_ and atan2_ */
02678         if ( *s == '-' ) s++;
02679         c = *s; *s = 0;
02680 /*
02681         We still need provisions for pi_ and possibly other constants.
02682 */
02683         if ( ( ( type = GetName(AC.varnames,subkey,&numfun,NOAUTO) ) != CFUNCTION )
02684             || ( functions[numfun].spec != 0 ) ) {
02685
02686             if ( type == CSYMBOL ) {
02687                 Add4Com(TYPEEEVALUATE,SYMBOL,numfun);
02688                 break;
02689             }
02690 /*
02691             This cannot work.
02692 */
02693             MesPrint("%%s should be a built in function that can be evaluated numerically.",s);
02694             return(1);
02695         }
02696         else {
02697             switch ( numfun+FUNCTION ) {
02698                 case MZV:

```



```

02699         case EULER:
02700         case MZVHALF:
02701     /*
02702         The following functions are treated in evaluate.c
02703     */
02704         case SQRTFUNCTION:
02705         case LNFUNCTION:
02706         case EXPFUNCTION:
02707         case SINFUNCTION:
02708         case COSFUNCTION:
02709         case TANFUNCTION:
02710         case ASINFUNCTION:
02711         case ACOSFUNCTION:
02712         case ATANFUNCTION:
02713         case ATAN2FUNCTION:
02714         case SINHFUNCTION:
02715         case COSHFUNCTION:
02716         case TANHFUNCTION:
02717         case ASINHFUNCTION:
02718         case ACOSHFUNCTION:
02719         case ATANHFUNCTION:
02720         case LI2FUNCTION:
02721         case LINFUNCTION:
02722         case AGMFUNCTION:
02723         case GAMMAFUN:
02724     /*
02725         At a later stage we can add more functions from mpfr here
02726         mpfr_(number, arg(s))
02727     */
02728         Add3Com(TYPEEVALUATE, numfun+FUNCTION);
02729         break;
02730     default:
02731         MesPrint("%s should be a built in function that can be evaluated numerically.", s);
02732         error = 1;
02733         break;
02734     }
02735 }
02736 *s = c;
02737 while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02738 }
02739 return(error);
02740 }
02741
02742 /*
02743     #] CoEvaluate :
02744     #] Functions :
02745 */

```


4.47 form3.h File Reference

```

#include <stdint.h>
#include <stddef.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>
#include <limits.h>
#include "ftypes.h"
#include "fsizes.h"
#include "minos.h"
#include "structs.h"
#include "declare.h"
#include "variable.h"

```

Include dependency graph for form3.h:



Macros

- #define MAJORVERSION 5
- #define MINORVERSION 0
- #define PRODUCTIONDATE "8-nov-2022"
- #define BETAVERSION
- #define inline
- #define NDEBUG
- #define STATIC_ASSERT(condition) STATIC_ASSERT__1(condition, __LINE__)
- #define STATIC_ASSERT__1(X, L) STATIC_ASSERT__2(X, L)
- #define STATIC_ASSERT__2(X, L) STATIC_ASSERT__3(X, L)
- #define STATIC_ASSERT__3(X, L) typedef char static_assertion_failed_##L[(!!(X))*2-1]
- #define BITSINWORD 32
- #define BITSINLONG 64
- #define WORD_MIN_VALUE INT32_MIN
- #define WORD_MAX_VALUE INT32_MAX
- #define LONG_MIN_VALUE INT64_MIN
- #define LONG_MAX_VALUE INT64_MAX
- #define TOPBITONLY ((ULONG)1 << (BITSINWORD - 1)) /* 0x00008000UL */
- #define TOPLONGBITONLY ((ULONG)1 << (BITSINLONG - 1)) /* 0x80000000UL */
- #define SPECMASK ((UWORD)1 << (BITSINWORD - 1)) /* 0x8000U */
- #define WILDMASK ((UWORD)1 << (BITSINWORD - 2)) /* 0x4000U */
- #define WORDMASK ((ULONG)FULLMAX - 1) /* 0x0000FFFFUL */
- #define AWORDMASK (WORDMASK << BITSINWORD) /* 0xFFFF0000UL */
- #define FULLMAX ((LONG)1 << BITSINWORD) /* 0x00010000L */
- #define MAXPOSITIVE ((LONG)(TOPBITONLY - 1)) /* 0x00007FFF */
- #define MAXLONG ((LONG)(TOPLONGBITONLY - 1)) /* 0x7FFFFFFFL */
- #define MAXPOSITIVE2 (MAXPOSITIVE / 2) /* 0x00003FFF */
- #define MAXPOSITIVE4 (MAXPOSITIVE / 4) /* 0x00001FFF */
- #define form_alignof(type) offsetof(struct { char c_; type x_; }, x_)
- #define WITHSORTBOTS
- #define FILES FILE
- #define Uopen(x, y) fopen(x, y)
- #define Uflush(x) fflush(x)
- #define Uclose(x) fclose(x)
- #define Uread(x, y, z, u) fread(x, y, z, u)
- #define Uwrite(x, y, z, u) fwrite(x, y, z, u)
- #define Usetbuf(x, y) setbuf(x, y)
- #define Useek(x, y, z) fseek(x, y, z)
- #define Utell(x) ftell(x)
- #define Ugetpos(x, y) fgetpos(x, y)
- #define Usetpos(x, y) fsetpos(x, y)
- #define Usync(x) fflush(x)
- #define Utruncate(x) _chsize(_fileno(x), 0)
- #define Ustdout stdout
- #define MAX_OPEN_FILES FOPEN_MAX
- #define bzero(b, len) (memset((b), 0, (len)), (void)0)
- #define GetPID() ((LONG)GetCurrentProcessId())

Typedefs

- typedef int32_t [WORD](#)
- typedef int64_t [LONG](#)
- typedef uint32_t [UWORD](#)
- typedef uint64_t [ULONG](#)
- typedef signed char [SBYTE](#)
- typedef unsigned char [UBYTE](#)
- typedef unsigned int [UINT](#)
- typedef ULONG [RLONG](#)
- typedef int64_t [MLONG](#)
- typedef char [BOOL](#)

Functions

- **STATIC_ASSERT** (sizeof(WORD) *8==BITSINWORD)
- **STATIC_ASSERT** (sizeof(LONG) *8==BITSINLONG)
- **STATIC_ASSERT** (sizeof(LONG) >=sizeof(int *))
- **STATIC_ASSERT** (sizeof(int *) >=sizeof(int))
- **STATIC_ASSERT** (sizeof(int) >=sizeof(WORD))
- **STATIC_ASSERT** (sizeof(WORD) >=sizeof(char))
- **STATIC_ASSERT** (sizeof(char)==1)
- **STATIC_ASSERT** (sizeof(off_t) >=sizeof(LONG))

4.47.1 Detailed Description

Contains critical defines for the compilation process Also contains the inclusion of all necessary header files. There are also some system dependencies concerning file functions.

Definition in file [form3.h](#).

4.47.2 Macro Definition Documentation

4.47.2.1 MAJORVERSION

```
#define MAJORVERSION 5
```

Definition at line [47](#) of file [form3.h](#).

4.47.2.2 MINORVERSION

```
#define MINORVERSION 0
```

Definition at line [48](#) of file [form3.h](#).

4.47.2.3 PRODUCTIONDATE

```
#define PRODUCTIONDATE "8-nov-2022"
```

Definition at line [53](#) of file [form3.h](#).

4.47.2.4 BETAVERSION

```
#define BETAVERSION
```

Definition at line 57 of file [form3.h](#).

4.47.2.5 inline

```
#define inline
```

Definition at line 120 of file [form3.h](#).

4.47.2.6 NDEBUG

```
#define NDEBUG
```

Definition at line 147 of file [form3.h](#).

4.47.2.7 STATIC_ASSERT

```
#define STATIC_ASSERT(  
    condition ) STATIC_ASSERT__1(condition, __LINE__)
```

Definition at line 158 of file [form3.h](#).

4.47.2.8 STATIC_ASSERT__1

```
#define STATIC_ASSERT__1(  
    X,  
    L ) STATIC_ASSERT__2(X, L)
```

Definition at line 159 of file [form3.h](#).

4.47.2.9 STATIC_ASSERT__2

```
#define STATIC_ASSERT__2(  
    X,  
    L ) STATIC_ASSERT__3(X, L)
```

Definition at line 160 of file [form3.h](#).

4.47.2.10 STATIC_ASSERT__3

```
#define STATIC_ASSERT__3(  
    X,  
    L ) typedef char static_assertion_failed_##L[ (!!(X))*2-1]
```

Definition at line 161 of file [form3.h](#).

4.47.2.11 BITSINWORD

```
#define BITSINWORD 32
```

Definition at line 200 of file [form3.h](#).

4.47.2.12 BITSINLONG

```
#define BITSINLONG 64
```

Definition at line 201 of file [form3.h](#).

4.47.2.13 WORD_MIN_VALUE

```
#define WORD_MIN_VALUE INT32_MIN
```

Definition at line 202 of file [form3.h](#).

4.47.2.14 WORD_MAX_VALUE

```
#define WORD_MAX_VALUE INT32_MAX
```

Definition at line 203 of file [form3.h](#).

4.47.2.15 LONG_MIN_VALUE

```
#define LONG_MIN_VALUE INT64_MIN
```

Definition at line 204 of file [form3.h](#).

4.47.2.16 LONG_MAX_VALUE

```
#define LONG_MAX_VALUE INT64_MAX
```

Definition at line 205 of file [form3.h](#).

4.47.2.17 TOPBITONLY

```
#define TOPBITONLY ((ULONG)1 << (BITSINWORD - 1)) /* 0x00008000UL */
```

Definition at line 242 of file [form3.h](#).

4.47.2.18 TOPLONGBITONLY

```
#define TOPLONGBITONLY ((ULONG)1 << (BITSINLONG - 1)) /* 0x80000000UL */
```

Definition at line 243 of file [form3.h](#).

4.47.2.19 SPECMASK

```
#define SPECMASK ((UWORD)1 << (BITSINWORD - 1)) /* 0x8000U */
```

Definition at line 244 of file [form3.h](#).

4.47.2.20 WILDMASK

```
#define WILDMASK ((UWORD)1 << (BITSINWORD - 2)) /* 0x4000U */
```

Definition at line 245 of file [form3.h](#).

4.47.2.21 WORDMASK

```
#define WORDMASK ((ULONG)FULLMAX - 1) /* 0x0000FFFFUL */
```

Definition at line 246 of file [form3.h](#).

4.47.2.22 AWORDMASK

```
#define AWORDMASK (WORDMASK << BITSINWORD) /* 0xFFFF0000UL */
```

Definition at line 247 of file [form3.h](#).

4.47.2.23 FULLMAX

```
#define FULLMAX ((LONG)1 << BITSINWORD) /* 0x00010000L */
```

Definition at line 248 of file [form3.h](#).

4.47.2.24 MAXPOSITIVE

```
#define MAXPOSITIVE ((LONG)(TOPBITONLY - 1)) /* 0x00007FFFL */
```

Definition at line 249 of file [form3.h](#).

4.47.2.25 MAXLONG

```
#define MAXLONG ((LONG)(TOPLONGBITONLY - 1)) /* 0x7FFFFFFFL */
```

Definition at line 250 of file [form3.h](#).

4.47.2.26 MAXPOSITIVE2

```
#define MAXPOSITIVE2 (MAXPOSITIVE / 2) /* 0x00003FFFL */
```

Definition at line 251 of file [form3.h](#).

4.47.2.27 MAXPOSITIVE4

```
#define MAXPOSITIVE4 (MAXPOSITIVE / 4) /* 0x00001FFFL */
```

Definition at line 252 of file [form3.h](#).

4.47.2.28 form_alignof

```
#define form_alignof(  
    type ) offsetof(struct { char c_; type x_; }, x_)
```

Definition at line 268 of file [form3.h](#).

4.47.2.29 WITHSORTBOTS

```
#define WITHSORTBOTS
```

Definition at line 288 of file [form3.h](#).

4.47.2.30 FILES

```
#define FILES FILE
```

Definition at line 372 of file [form3.h](#).

4.47.2.31 Uopen

```
#define Uopen(  
    x,  
    y ) fopen(x,y)
```

Definition at line 373 of file [form3.h](#).

4.47.2.32 Uflush

```
#define Uflush(  
    x ) fflush(x)
```

Definition at line 374 of file [form3.h](#).

4.47.2.33 Uclose

```
#define Uclose(  
    x ) fclose(x)
```

Definition at line 375 of file [form3.h](#).

4.47.2.34 Uread

```
#define Uread(  
    x,  
    y,  
    z,  
    u ) fread(x,y,z,u)
```

Definition at line 376 of file [form3.h](#).

4.47.2.35 Uwrite

```
#define Uwrite(  
    x,  
    y,  
    z,  
    u ) fwrite(x,y,z,u)
```

Definition at line 377 of file [form3.h](#).

4.47.2.36 Usetbuf

```
#define Usetbuf(  
    x,  
    y ) setbuf(x,y)
```

Definition at line 378 of file [form3.h](#).

4.47.2.37 Useek

```
#define Useek(  
    x,  
    y,  
    z ) fseek(x,y,z)
```

Definition at line 379 of file [form3.h](#).

4.47.2.38 Utell

```
#define Utell(  
    x ) ftell(x)
```

Definition at line 380 of file [form3.h](#).

4.47.2.39 Ugetpos

```
#define Ugetpos(  
    x,  
    y ) fgetpos(x,y)
```

Definition at line 381 of file [form3.h](#).

4.47.2.40 Usetpos

```
#define Usetpos(  
    x,  
    y ) fsetpos(x,y)
```

Definition at line 382 of file [form3.h](#).

4.47.2.41 Usync

```
#define Usync(  
    x ) fflush(x)
```

Definition at line 383 of file [form3.h](#).

4.47.2.42 Utruncate

```
#define Utruncate(  
    x ) _chsize(_fileno(x),0)
```

Definition at line 384 of file [form3.h](#).

4.47.2.43 Ustdout

```
#define Ustdout stdout
```

Definition at line 385 of file [form3.h](#).

4.47.2.44 MAX_OPEN_FILES

```
#define MAX_OPEN_FILES FOPEN_MAX
```

Definition at line 386 of file [form3.h](#).

4.47.2.45 bzero

```
#define bzero(  
    b,  
    len ) (memset((b), 0, (len)), (void)0)
```

Definition at line 387 of file [form3.h](#).

4.47.2.46 GetPID

```
#define GetPID( ) ((LONG)GetCurrentProcessId())
```

Definition at line 388 of file [form3.h](#).

4.47.3 Typedef Documentation

4.47.3.1 WORD

```
typedef int32_t WORD
```

Definition at line 196 of file [form3.h](#).

4.47.3.2 LONG

```
typedef int64_t LONG
```

Definition at line 197 of file [form3.h](#).

4.47.3.3 UWORD

```
typedef uint32_t UWORD
```

Definition at line 198 of file [form3.h](#).

4.47.3.4 ULONG

```
typedef uint64_t ULONG
```

Definition at line 199 of file [form3.h](#).

4.47.3.5 SBYTE

```
typedef signed char SBYTE
```

Definition at line 231 of file [form3.h](#).

4.47.3.6 UBYTE

```
typedef unsigned char UBYTE
```

Definition at line 232 of file [form3.h](#).

4.47.3.7 UINT

```
typedef unsigned int UINT
```

Definition at line 233 of file [form3.h](#).

4.47.3.8 RLONG

```
typedef ULONG RLONG
```

Definition at line 234 of file [form3.h](#).

4.47.3.9 MLONG

```
typedef int64_t MLONG
```

Definition at line 235 of file [form3.h](#).

4.47.3.10 BOOL

```
typedef char BOOL
```

Definition at line 240 of file [form3.h](#).

4.48 form3.h

[Go to the documentation of this file.](#)

```
00001
00008 /* #[] License : */
00009 /*
00010 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 *   When using this file you are requested to refer to the publication
00012 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 *   This is considered a matter of courtesy as the development was paid
00014 *   for by FOM the Dutch physics granting agency and we would like to
00015 *   be able to track its scientific use to convince FOM of its value
00016 *   for the community.
00017 *
00018 *   This file is part of FORM.
00019 *
00020 *   FORM is free software: you can redistribute it and/or modify it under the
00021 *   terms of the GNU General Public License as published by the Free Software
00022 *   Foundation, either version 3 of the License, or (at your option) any later
00023 *   version.
00024 *
00025 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 *   details.
00029 *
00030 *   You should have received a copy of the GNU General Public License along
00031 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* #[] License : */
00034
00035 #ifndef __FORM3H__
00036 #define __FORM3H__
00037
00038 #ifdef HAVE_CONFIG_H
00039
00040 #ifndef CONFIG_H_INCLUDED
00041 #define CONFIG_H_INCLUDED
00042 #include <config.h>
00043 #endif
00044
00045 #else /* HAVE_CONFIG_H */
00046
00047 #define MAJORVERSION 5
00048 #define MINORVERSION 0
00049
00050 #ifdef __DATE__
00051 #define PRODUCTIONDATE __DATE__
00052 #else
```

```

00053 #define PRODUCTIONDATE "8-nov-2022"
00054 #endif
00055
00056 /*#undef BETAVERSION */
00057 #define BETAVERSION
00058
00059 #ifdef LINUX32
00060 #define UNIX
00061 #define LINUX
00062 #define _FILE_OFFSET_BITS 64
00063 #define WITHZLIB
00064 #define WITHGMP
00065 #define WITHPOSIXCLOCK
00066 #endif
00067
00068 #ifdef LINUX64
00069 #define UNIX
00070 #define LINUX
00071 #define WITHZLIB
00072 #define WITHGMP
00073 #define WITHPOSIXCLOCK
00074 #define WITHFLOAT
00075 #endif
00076
00077 #ifdef APPLE32
00078 #define UNIX
00079 #define _FILE_OFFSET_BITS 64
00080 #define WITHZLIB
00081 #endif
00082
00083 #ifdef APPLE64
00084 #define UNIX
00085 #define WITHZLIB
00086 #define WITHGMP
00087 #define WITHPOSIXCLOCK
00088 #define WITHFLOAT
00089 #define HAVE_UNORDERED_MAP
00090 #define HAVE_UNORDERED_SET
00091 #endif
00092
00093 #ifdef CYGWIN32
00094 #define UNIX
00095 #endif
00096
00097 #ifdef _MSC_VER
00098 #define WINDOWS
00099 #define _CRT_SECURE_NO_WARNINGS
00100 #endif
00101
00102 /*
00103  * We must not define WITHPOSIXCLOCK in compiling the sequential FORM or ParFORM.
00104  */
00105 #if !defined(WITHPTHREADS) && defined(WITHPOSIXCLOCK)
00106 #undef WITHPOSIXCLOCK
00107 #endif
00108
00109 #if !defined(__cplusplus) && !defined(inline)
00110 #if (defined(__STDC_VERSION__) && __STDC_VERSION__ >= 199901L) || (defined(__GNUC__) &&
!defined(__STRICT_ANSI__))
00111 /* "inline" is available. */
00112 #elif defined(__GNUC__)
00113 /* GNU C compiler has "__inline__". */
00114 #define inline __inline__
00115 #elif defined(_MSC_VER)
00116 /* Microsoft C compiler has "__inline". */
00117 #define inline __inline
00118 #else
00119 /* Inline functions may be not supported. Define "inline" to be empty. */
00120 #define inline
00121 #endif
00122 #endif
00123
00124 #endif /* HAVE_CONFIG_H */
00125
00126 /* Workaround for MSVC. */
00127 #if defined(_MSC_VER)
00128 /*
00129  * Old versions of MSVC didn't support C99 function `snprintf`, which is used
00130  * in poly.cc. On the other hand, macroizing `snprintf` gives a fatal error
00131  * with MSVC >= 2015.
00132  */
00133 #if _MSC_VER < 1900
00134 #define snprintf _snprintf
00135 #endif
00136 #endif
00137
00138 /*

```

```

00139  * Translate our dialect "DEBUGGING" to the standard "NDEBUG".
00140  */
00141  #ifndef DEBUGGING
00142  #ifdef NDEBUG
00143  #undef NDEBUG
00144  #endif
00145  #else
00146  #ifndef NDEBUG
00147  #define NDEBUG
00148  #endif
00149  #endif
00150
00151  /*
00152  * STATIC_ASSERT(condition) will fail to be compiled if the given
00153  * condition is false.
00154  */
00155  /*
00156  #define STATIC_ASSERT(condition)
00157  */
00158  #define STATIC_ASSERT(condition) STATIC_ASSERT__1(condition, __LINE__)
00159  #define STATIC_ASSERT__1(X,L) STATIC_ASSERT__2(X,L)
00160  #define STATIC_ASSERT__2(X,L) STATIC_ASSERT__3(X,L)
00161  #define STATIC_ASSERT__3(X,L) \
00162      typedef char static_assertion_failed_##L[(!!(X))*2-1]
00163
00164  /*
00165  * UNIX or WINDOWS must be defined.
00166  */
00167  #if defined(UNIX)
00168  #define mBSD
00169  #define ANSI
00170  #elif defined(WINDOWS)
00171  #define ANSI
00172  #define WIN32_LEAN_AND_MEAN
00173  #include <windows.h>
00174  #include <io.h>
00175  #include <fcntl.h>
00176  /* Undefine/rename conflicted symbols. */
00177  #undef MAXLONG /* WinNT.h */
00178  #define WORD FORM_WORD /* WinDef.h */
00179  #define LONG FORM_LONG /* WinNT.h */
00180  #define ULONG FORM_ULONG /* WinDef.h */
00181  #define BOOL FORM_BOOL /* WinDef.h */
00182  #undef CreateFile /* WinBase.h */
00183  #undef CopyFile /* WinBase.h */
00184  #define OpenFile FORM_OpenFile /* WinBase.h */
00185  #define ReOpenFile FORM_ReOpenFile /* WinBase.h */
00186  #define ReadFile FORM_ReadFile /* WinBase.h */
00187  #define WriteFile FORM_WriteFile /* WinBase.h */
00188  #define DeleteObject FORM_DeleteObject /* WinGDI.h */
00189  #else
00190  #error UNIX or WINDOWS must be defined!
00191  #endif
00192
00193  #include <stdint.h>
00194
00195  #if UINTPTR_MAX == UINT64_MAX
00196      typedef int32_t WORD;
00197      typedef int64_t LONG;
00198      typedef uint32_t UWORD;
00199      typedef uint64_t ULONG;
00200      #define BITSINWORD 32
00201      #define BITSINLONG 64
00202      #define WORD_MIN_VALUE INT32_MIN
00203      #define WORD_MAX_VALUE INT32_MAX
00204      #define LONG_MIN_VALUE INT64_MIN
00205      #define LONG_MAX_VALUE INT64_MAX
00206  #elif UINTPTR_MAX == UINT32_MAX
00207      typedef int16_t WORD;
00208      typedef int32_t LONG;
00209      typedef uint16_t UWORD;
00210      typedef uint32_t ULONG;
00211      #define BITSINWORD 16
00212      #define BITSINLONG 32
00213      #define WORD_MIN_VALUE INT16_MIN
00214      #define WORD_MAX_VALUE INT16_MAX
00215      #define LONG_MIN_VALUE INT32_MIN
00216      #define LONG_MAX_VALUE INT32_MAX
00217  #else
00218      #error Can not detect if this is a 32-bit or 64-bit platform.
00219  #endif
00220
00221  STATIC_ASSERT(sizeof(WORD) * 8 == BITSINWORD);
00222  STATIC_ASSERT(sizeof(LONG) * 8 == BITSINLONG);
00223  STATIC_ASSERT(sizeof(WORD) * 2 == sizeof(LONG));
00224  STATIC_ASSERT(sizeof(LONG) >= sizeof(int *));
00225  STATIC_ASSERT(sizeof(LONG) >= sizeof(int *));

```

```

00226 STATIC_ASSERT(sizeof(int *) >= sizeof(int));
00227 STATIC_ASSERT(sizeof(int) >= sizeof(WORD));
00228 STATIC_ASSERT(sizeof(WORD) >= sizeof(char));
00229 STATIC_ASSERT(sizeof(char) == 1);
00230
00231 typedef signed char SBYTE;
00232 typedef unsigned char UBYTE;
00233 typedef unsigned int UINT;
00234 typedef ULONG RLONG; /* Used in reken.c. */
00235 typedef int64_t MLONG; /* See commentary in minos.h. */
00236 /*
00237  * NOTE: we don't use the standard _Bool (or C++ bool) because its size is
00238  * implementation-dependent.
00239  */
00240 typedef char BOOL;
00241
00242 #define TOPBITONLY ((ULONG)1 << (BITSINWORD - 1)) /* E.g. in 32-bits */
00243 #define TOPLONGBITONLY ((ULONG)1 << (BITSINLONG - 1)) /* 0x00008000UL */
00244 #define SPECMASK ((UWORD)1 << (BITSINWORD - 1)) /* 0x8000U */
00245 #define WILDMASK ((UWORD)1 << (BITSINWORD - 2)) /* 0x4000U */
00246 #define WORDMASK ((ULONG)FULLMAX - 1) /* 0x0000FFFFUL */
00247 #define AWORDMASK (WORDMASK << BITSINWORD) /* 0xFFFF0000UL */
00248 #define FULLMAX ((LONG)1 << BITSINWORD) /* 0x00010000L */
00249 #define MAXPOSITIVE ((LONG)(TOPBITONLY - 1)) /* 0x00007FFF */
00250 #define MAXLONG ((LONG)(TOPLONGBITONLY - 1)) /* 0x7FFFFFFF */
00251 #define MAXPOSITIVE2 (MAXPOSITIVE / 2) /* 0x00003FFF */
00252 #define MAXPOSITIVE4 (MAXPOSITIVE / 4) /* 0x00001FFF */
00253
00254 /*
00255  * form_alignof(type) returns the number of bytes used in the alignment of
00256  * the type.
00257  */
00258 #if !defined(form_alignof)
00259 #if defined(__GNUC__)
00260 /* GNU C compiler has "__alignof__". */
00261 #define form_alignof(type) __alignof__(type)
00262 #elif defined(_MSC_VER)
00263 /* Microsoft C compiler has "__alignof". */
00264 #define form_alignof(type) __alignof(type)
00265 #elif !defined(__cplusplus)
00266 /* Generic case in C. */
00267 #include <stddef.h>
00268 #define form_alignof(type) offsetof(struct { char c_; type x_; }, x_)
00269 #else
00270 /* Generic case in C++, at least works with a POD struct. */
00271 #include <cstddef>
00272 namespace alignof_impl_ {
00273 template<typename T> struct calc {
00274     struct X { char c_; T x_; };
00275     enum { value = offsetof(X, x_) };
00276 };
00277 }
00278 #define form_alignof(type) alignof_impl_::calc<type>::value
00279 #endif
00280 #endif
00281
00282 /*
00283 #define WITHPCOUNTER
00284 #define DEBUGGINGLOCKS
00285 #define WITHSTATS
00286 */
00287 #define WITHSORTBOTS
00288
00289 #include <stdio.h>
00290 #include <stdlib.h>
00291 #include <string.h>
00292 #include <ctype.h>
00293 #include <limits.h>
00294 #ifdef ANSI
00295 #include <stdarg.h>
00296 #include <time.h>
00297 #endif
00298 #ifdef WINDOWS
00299 #include "fwin.h"
00300 #endif
00301 #ifdef UNIX
00302 #include <unistd.h>
00303 #include <time.h>
00304 #include <fcntl.h>
00305 #include <sys/file.h>
00306 #include "unix.h"
00307 #endif
00308 #ifdef WITHZLIB
00309 #include <zstd_zlibwrapper.h>
00310 #endif
00311 #else
00312 #endif

```

```

00313 #include <zlib.h>
00314 #endif
00315 #endif
00316 #ifdef WITHPTHREADS
00317 #include <pthread.h>
00318 #endif
00319
00320 /*
00321     PARALLELCODE indicates code that is common for TFORM and ParFORM but
00322     should not be there for sequential FORM.
00323 */
00324 #if defined(WITHMPI) || defined(WITHPTHREADS)
00325 #define PARALLELCODE
00326 #endif
00327
00328 #include "ftypes.h"
00329 #include "fsizes.h"
00330 #include "minos.h"
00331 #include "structs.h"
00332 #include "declare.h"
00333 #include "variable.h"
00334
00335 STATIC_ASSERT(sizeof(off_t) >= sizeof(LONG));
00336
00337 /*
00338  * The interface to file routines for UNIX or non-UNIX (Windows).
00339  */
00340 #ifdef UNIX
00341
00342 #define UFILES
00343 typedef struct FileS {
00344     int descriptor;
00345 } FILES;
00346 extern FILES *Uopen(char *, char *);
00347 extern int Uclose(FILES *);
00348 extern size_t Uread(char *, size_t, size_t, FILES *);
00349 extern size_t Uwrite(char *, size_t, size_t, FILES *);
00350 extern int Useek(FILES *, off_t, int);
00351 extern off_t Utell(FILES *);
00352 extern void Uflush(FILES *);
00353 extern int Ugetpos(FILES *, fpos_t *);
00354 extern int Usetpos(FILES *, fpos_t *);
00355 extern void Usetbuf(FILES *, char *);
00356 #define Usync(f) fsync(f->descriptor)
00357 #define Utruncate(f) { \
00358     if ( ftruncate(f->descriptor, 0) ) { \
00359         MLOCK(ErrorMessageLock); \
00360         MesPrint("Utruncate failed"); \
00361         MUNLOCK(ErrorMessageLock); \
00362         /* Calling Terminate() here may cause an infinite loop due to CleanUpSort(). */ \
00363         /* Terminate(-1); */ \
00364     } \
00365 }
00366 extern FILES *Ustdout;
00367 #define MAX_OPEN_FILES getdtablesize()
00368 #define GetPID() ((LONG)getpid())
00369
00370 #else /* UNIX */
00371
00372 #define FILES FILE
00373 #define Uopen(x,y) fopen(x,y)
00374 #define Uflush(x) fflush(x)
00375 #define Uclose(x) fclose(x)
00376 #define Uread(x,y,z,u) fread(x,y,z,u)
00377 #define Uwrite(x,y,z,u) fwrite(x,y,z,u)
00378 #define Usetbuf(x,y) setbuf(x,y)
00379 #define Useek(x,y,z) fseek(x,y,z)
00380 #define Utell(x) ftell(x)
00381 #define Ugetpos(x,y) fgetpos(x,y)
00382 #define Usetpos(x,y) fsetpos(x,y)
00383 #define Usync(x) fflush(x)
00384 #define Utruncate(x) _chsize(_fileno(x),0)
00385 #define Ustdout stdout
00386 #define MAX_OPEN_FILES FOPEN_MAX
00387 #define bzero(b,len) (memset((b), 0, (len)), (void)0)
00388 #define GetPID() ((LONG)GetCurrentProcessId())
00389
00390 #endif /* UNIX */
00391
00392 /*
00393  * Some system may implement the POSIX "environ" variable as a macro, e.g.,
00394  * https://github.com/mingw-w64/mingw-w64/blob/v10.0.0/mingw-w64-headers/crt/stdlib.h#L704
00395  * which breaks the definition of DoShattering() in diagrams.c that uses
00396  * "environ" as a formal parameter. Because FORM doesn't use the POSIX "environ"
00397  * or its variant anyway, we can just undefine it.
00398  */
00399 #ifdef environ

```

```

00400 #undef environ
00401 #endif
00402
00403 #ifdef WITHMPI
00404 #include "parallel.h"
00405 #endif
00406
00407 #endif /* __FORM3H__ */

```

4.49 fsizes.h File Reference

This graph shows which files directly or indirectly include this file:



Macros

- #define [MAXPRENAMESIZE](#) 128
- #define [MAXENAME](#) 16
- #define [MAXSAVEFUNCTION](#) 16384
- #define [MAXPARLEVEL](#) 100
- #define [MAXNUMBERSIZE](#) 200
- #define [MAXREPEAT](#) 100
- #define [NORMSIZE](#) 1000
- #define [INITNODESIZE](#) 10
- #define [INITNAMESIZE](#) 100
- #define [NUMFIXED](#) 128
- #define [MAXNEST](#) 100
- #define [MAXMATCH](#) 30
- #define [MAXIF](#) 20
- #define [SIZEFACS](#) 640L
- #define [NUMFACS](#) 50
- #define [MAXLOOPS](#) 30
- #define [MAXLABELS](#) 20
- #define [COMMERCIALSIZE](#) 24
- #define [MAXFLAGS](#) 16
- #define [COMPRESSBUFFER](#) 90000
- #define [FORTRANCONTINUATIONLINES](#) 15
- #define [MAXLEVELS](#) 2000
- #define [MAXLHS](#) 400
- #define [MAXWILDC](#) 100
- #define [NUMTABLEENTRIES](#) 1000
- #define [COMPILERBUFFER](#) 20000
- #define [MAXPATCHES](#) 256
- #define [MAXFPATCHES](#) 256
- #define [SORTIOSIZE](#) 200000L
- #define [SSMALLBUFFER](#) 2560016L
- #define [SSMALLOVERFLOW](#) 3840032L
- #define [STERMSSMALL](#) 10000L
- #define [SLARGEBUFFER](#) 26880512L
- #define [SMAXPATCHES](#) 64
- #define [SMAXFPATCHES](#) 64

- `#define SSORTIOSIZE 32768L`
- `#define SPECTATORSIZE 1048576L`
- `#define MAXFLEVELS 30`
- `#define COMPINC 2`
- `#define MAXNUMSIZE 10`
- `#define MAXBRACKETBUFFERSIZE 200000`
- `#define SFHSIZE 40`
- `#define DEFAULTPROCESSBUCKETSIZE 1000`
- `#define SHMWINSIZE 65536L`
- `#define TABLEEXTENSION 6`
- `#define GZIPDEFAULT 6`
- `#define DEFAULTTTHREADS 0`
- `#define DEFAULTTTHREADBUCKETSIZE 500`
- `#define DEFAULTTTHREADLOADBALANCING 1`
- `#define THREADSCRATCHSIZE 100000L`
- `#define THREADSCRATCHOUTSIZE 2500000L`
- `#define NUMSTORECACHES 4`
- `#define SIZESTORECACHE 32768`
- `#define INDENTSPACE 3`
- `#define MULTIINDENTSPACE 1`
- `#define MAXMULTIBRACKETLEVELS 25`
- `#define FBUFFERSIZE 1026`
- `#define NPAIR1 38`
- `#define NPAIR2 89`
- `#define MAXLINELENGTH 256`
- `#define MINALLOC 32`
- `#define JUMPRATIO 4`
- `#define MAXPARTICLES 20`
- `#define MAXCOUPLINGS 20`
- `#define NUMOPTIONS 20`
- `#define MAXLEGS 20`

4.49.1 Detailed Description

The definition the default values for certain buffer sizes etc.

Definition in file [fsizes.h](#).

4.49.2 Macro Definition Documentation

4.49.2.1 MAXPRENAMESIZE

```
#define MAXPRENAMESIZE 128
```

Definition at line 36 of file [fsizes.h](#).

4.49.2.2 MAXENAME

```
#define MAXENAME 16
```

Definition at line 73 of file [fsizes.h](#).

4.49.2.3 MAXSAVEFUNCTION

```
#define MAXSAVEFUNCTION 16384
```

Definition at line 74 of file [fsizes.h](#).

4.49.2.4 MAXPARLEVEL

```
#define MAXPARLEVEL 100
```

Definition at line 76 of file [fsizes.h](#).

4.49.2.5 MAXNUMBERSIZE

```
#define MAXNUMBERSIZE 200
```

Definition at line 77 of file [fsizes.h](#).

4.49.2.6 MAXREPEAT

```
#define MAXREPEAT 100
```

Definition at line 79 of file [fsizes.h](#).

4.49.2.7 NORMSIZE

```
#define NORMSIZE 1000
```

Definition at line 80 of file [fsizes.h](#).

4.49.2.8 INITNODESIZE

```
#define INITNODESIZE 10
```

Definition at line 82 of file [fsizes.h](#).

4.49.2.9 INITNAME SIZE

```
#define INITNAME SIZE 100
```

Definition at line 83 of file [fsizes.h](#).

4.49.2.10 NUMFIXED

```
#define NUMFIXED 128
```

Definition at line 85 of file [fsizes.h](#).

4.49.2.11 MAXNEST

```
#define MAXNEST 100
```

Definition at line 86 of file [fsizes.h](#).

4.49.2.12 MAXMATCH

```
#define MAXMATCH 30
```

Definition at line 87 of file [fsizes.h](#).

4.49.2.13 MAXIF

```
#define MAXIF 20
```

Definition at line 88 of file [fsizes.h](#).

4.49.2.14 SIZEFACS

```
#define SIZEFACS 640L
```

Definition at line 89 of file [fsizes.h](#).

4.49.2.15 NUMFACS

```
#define NUMFACS 50
```

Definition at line 90 of file [fsizes.h](#).

4.49.2.16 MAXLOOPS

```
#define MAXLOOPS 30
```

Definition at line 91 of file [fsizes.h](#).

4.49.2.17 MAXLABELS

```
#define MAXLABELS 20
```

Definition at line 92 of file [fsizes.h](#).

4.49.2.18 COMMERCIALSIZE

```
#define COMMERCIALSIZE 24
```

Definition at line 93 of file [fsizes.h](#).

4.49.2.19 MAXFLAGS

```
#define MAXFLAGS 16
```

Definition at line 94 of file [fsizes.h](#).

4.49.2.20 COMPRESSBUFFER

```
#define COMPRESSBUFFER 90000
```

Definition at line 99 of file [fsizes.h](#).

4.49.2.21 FORTRANCONTINUATIONLINES

```
#define FORTRANCONTINUATIONLINES 15
```

Definition at line 100 of file [fsizes.h](#).

4.49.2.22 MAXLEVELS

```
#define MAXLEVELS 2000
```

Definition at line 101 of file [fsizes.h](#).

4.49.2.23 MAXLHS

```
#define MAXLHS 400
```

Definition at line 102 of file [fsizes.h](#).

4.49.2.24 MAXWILDC

```
#define MAXWILDC 100
```

Definition at line 103 of file [fsizes.h](#).

4.49.2.25 NUMTABLEENTRIES

```
#define NUMTABLEENTRIES 1000
```

Definition at line 104 of file [fsizes.h](#).

4.49.2.26 COMPILERBUFFER

```
#define COMPILERBUFFER 20000
```

Definition at line 105 of file [fsizes.h](#).

4.49.2.27 MAXPATCHES

```
#define MAXPATCHES 256
```

Definition at line 131 of file [fsizes.h](#).

4.49.2.28 MAXFPATCHES

```
#define MAXFPATCHES 256
```

Definition at line 132 of file [fsizes.h](#).

4.49.2.29 SORTIOSIZE

```
#define SORTIOSIZE 200000L
```

Definition at line 133 of file [fsizes.h](#).

4.49.2.30 SMALLBUFFER

```
#define SMALLBUFFER 2560016L
```

Definition at line 135 of file [fsizes.h](#).

4.49.2.31 SMALLOVERFLOW

```
#define SMALLOVERFLOW 3840032L
```

Definition at line 136 of file [fsizes.h](#).

4.49.2.32 TERMSSMALL

```
#define TERMSSMALL 10000L
```

Definition at line 137 of file [fsizes.h](#).

4.49.2.33 SLARGEBUFFER

```
#define SLARGEBUFFER 26880512L
```

Definition at line 138 of file [fsizes.h](#).

4.49.2.34 SMAXPATCHES

```
#define SMAXPATCHES 64
```

Definition at line 139 of file [fsizes.h](#).

4.49.2.35 SMAXFPATCHES

```
#define SMAXFPATCHES 64
```

Definition at line 140 of file [fsizes.h](#).

4.49.2.36 SSORTIOSIZE

```
#define SSORTIOSIZE 32768L
```

Definition at line 141 of file [fsizes.h](#).

4.49.2.37 SPECTATORSIZE

```
#define SPECTATORSIZE 1048576L
```

Definition at line 143 of file [fsizes.h](#).

4.49.2.38 MAXFLEVELS

```
#define MAXFLEVELS 30
```

Definition at line 145 of file [fsizes.h](#).

4.49.2.39 COMPINC

```
#define COMPINC 2
```

Definition at line 147 of file [fsizes.h](#).

4.49.2.40 MAXNUMSIZE

```
#define MAXNUMSIZE 10
```

Definition at line 149 of file [fsizes.h](#).

4.49.2.41 MAXBRACKETBUFFERSIZE

```
#define MAXBRACKETBUFFERSIZE 200000
```

Definition at line 151 of file [fsizes.h](#).

4.49.2.42 SFHSIZE

```
#define SFHSIZE 40
```

Definition at line 153 of file [fsizes.h](#).

4.49.2.43 DEFAULTPROCESSBUCKETSIZE

```
#define DEFAULTPROCESSBUCKETSIZE 1000
```

Definition at line 155 of file [fsizes.h](#).

4.49.2.44 SHMWINSIZE

```
#define SHMWINSIZE 65536L
```

Definition at line 156 of file [fsizes.h](#).

4.49.2.45 TABLEEXTENSION

```
#define TABLEEXTENSION 6
```

Definition at line 158 of file [fsizes.h](#).

4.49.2.46 GZIPDEFAULT

```
#define GZIPDEFAULT 6
```

Definition at line 160 of file [fsizes.h](#).

4.49.2.47 DEFAULTTTHREADS

```
#define DEFAULTTTHREADS 0
```

Definition at line 161 of file [fsizes.h](#).

4.49.2.48 DEFAULTTTHREADBUCKETSIZE

```
#define DEFAULTTTHREADBUCKETSIZE 500
```

Definition at line 162 of file [fsizes.h](#).

4.49.2.49 DEFAULTTTHREADLOADBALANCING

```
#define DEFAULTTTHREADLOADBALANCING 1
```

Definition at line 163 of file [fsizes.h](#).

4.49.2.50 THREADSCRATCHSIZE

```
#define THREADSCRATCHSIZE 100000L
```

Definition at line 164 of file [fsizes.h](#).

4.49.2.51 THREADSCRATCHOUTSIZE

```
#define THREADSCRATCHOUTSIZE 2500000L
```

Definition at line 165 of file [fsizes.h](#).

4.49.2.52 NUMSTORECACHES

```
#define NUMSTORECACHES 4
```

Definition at line 177 of file [fsizes.h](#).

4.49.2.53 SIZESTORECACHE

```
#define SIZESTORECACHE 32768
```

Definition at line 178 of file [fsizes.h](#).

4.49.2.54 INDENTSPACE

```
#define INDENTSPACE 3
```

Definition at line 180 of file [fsizes.h](#).

4.49.2.55 MULTIINDENTSPACE

```
#define MULTIINDENTSPACE 1
```

Definition at line 182 of file [fsizes.h](#).

4.49.2.56 MAXMULTIBRACKETLEVELS

```
#define MAXMULTIBRACKETLEVELS 25
```

Definition at line 183 of file [fsizes.h](#).

4.49.2.57 FBUFFERSIZE

```
#define FBUFFERSIZE 1026
```

Definition at line 185 of file [fsizes.h](#).

4.49.2.58 NPAIR1

```
#define NPAIR1 38
```

Definition at line 189 of file [fsizes.h](#).

4.49.2.59 NPAIR2

```
#define NPAIR2 89
```

Definition at line 190 of file [fsizes.h](#).

4.49.2.60 MAXLINELENGTH

```
#define MAXLINELENGTH 256
```

Definition at line 192 of file [fsizes.h](#).

4.49.2.61 MINALLOC

```
#define MINALLOC 32
```

Definition at line 193 of file [fsizes.h](#).

4.49.2.62 JUMPRATIO

```
#define JUMPRATIO 4
```

Definition at line 195 of file [fsizes.h](#).

4.49.2.63 MAXPARTICLES

```
#define MAXPARTICLES 20
```

Definition at line 199 of file [fsizes.h](#).

4.49.2.64 MAXCOUPLINGS

```
#define MAXCOUPLINGS 20
```

Definition at line 200 of file [fsizes.h](#).

4.49.2.65 NUMOPTIONS

```
#define NUMOPTIONS 20
```

Definition at line 201 of file [fsizes.h](#).

4.49.2.66 MAXLEGS

```
#define MAXLEGS 20
```

Definition at line 202 of file [fsizes.h](#).

4.50 fsizes.h

[Go to the documentation of this file.](#)

```

00001
00006 /* #[ License : */
00007 /*
00008 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #] License : */
00032
00033 /*
00034 *   First the fixed variables
00035 */
00036 #define MAXPRENAMESIZE 128
00037 /*
00038 *   The following variables are default sizes. They can be changed
00039 *   into values read from the setup file
00040
00041 *   Remark (21-dec-2008 JV): WILDOFFSET*3 should be larger than WILDMASK!!!
00042 *   old value was WILDOFFSET 200000100
00043 *   be careful with old .sav files!!!
00044 */
00045 #if BITSINWORD == 32
00046     #define MAXPOWER 500000000
00047     #define MAXVARIABLES 200000050
00048     #define MAXDOLLARVARIABLES 1000000000L
00049     #define WILDOFFSET 400000100
00050     #define MAXINNAMETREE 2000000000
00051     #define MAXDUMMIES 100000000
00052     #define WORKBUFFER 40000000
00053     #define MAXTER 40000
00054     #define HALFMAX 0x10000
00055     #define MAXSUBEXPRESSIONS 0x1FFFFFFF
00056     #define MAXFILESTREAMSIZE 1024
00057 #elif BITSINWORD == 16
00058     #define MAXPOWER 10000
00059     #define MAXVARIABLES 8050
00060     #define MAXDOLLARVARIABLES 32000
00061     #define WILDOFFSET 6100
00062     #define MAXINNAMETREE 32768
00063     #define MAXDUMMIES 1000
00064     #define WORKBUFFER 10000000
00065     #define MAXTER 10000
00066     #define HALFMAX 0x100
00067     #define MAXSUBEXPRESSIONS 0x3FFF
00068     #define MAXFILESTREAMSIZE 1048576
00069 #else
00070     #error Only 64-bit and 32-bit platforms are supported.
00071 #endif
00072
00073 #define MAXENAME 16
00074 #define MAXSAVEFUNCTION 16384
00075
00076 #define MAXPARLEVEL 100
00077 #define MAXNUMBERSIZE 200
00078
00079 #define MAXREPEAT 100
00080 #define NORMSIZE 1000
00081
00082 #define INITNODESIZE 10
00083 #define INITNAMESIZE 100
00084
00085 #define NUMFIXED 128
00086 #define MAXNEST 100

```

```
00087 #define MAXMATCH 30
00088 #define MAXIF 20
00089 #define SIZEFACS 640L
00090 #define NUMFACS 50
00091 #define MAXLOOPS 30
00092 #define MAXLABELS 20
00093 #define COMMERCIALSIZE 24
00094 #define MAXFLAGS 16
00095 /*
00096     The next quantities should still be eliminated from the program
00097     This should be together with changes in setfile!
00098 */
00099 #define COMPRESSBUFFER 90000
00100 #define FORTRANCONTINUATIONLINES 15
00101 #define MAXLEVELS 2000
00102 #define MAXLHS 400
00103 #define MAXWILDC 100
00104 #define NUMTABLEENTRIES 1000
00105 #define COMPILERBUFFER 20000
00106
00107 #if BITSINWORD == 32
00108     #ifdef WITHPTHREADS
00109         #define SMALLBUFFER 300000000L
00110         #define SMALLOVERFLOW 600000000L
00111         #define TERMSSMALL 3000000L
00112         #define LARGEBUFFER 1500000000L
00113         #define SCRATCHSIZE 500000000L
00114     #else
00115         #define SMALLBUFFER 150000000L
00116         #define SMALLOVERFLOW 300000000L
00117         #define TERMSSMALL 2000000L
00118         #define LARGEBUFFER 800000000L
00119         #define SCRATCHSIZE 500000000L
00120     #endif
00121 #elif BITSINWORD == 16
00122     #define SMALLBUFFER 10000000L
00123     #define SMALLOVERFLOW 20000000L
00124     #define TERMSSMALL 100000L
00125     #define LARGEBUFFER 50000000L
00126     #define SCRATCHSIZE 50000000L
00127 #else
00128     #error Only 64-bit and 32-bit platforms are supported.
00129 #endif
00130
00131 #define MAXPATCHES 256
00132 #define MAXFPATCHES 256
00133 #define SORTIOSIZE 200000L
00134
00135 #define SSMALLBUFFER 2560016L
00136 #define SSMALLOVERFLOW 3840032L
00137 #define STERMSSMALL 10000L
00138 #define SLARGEBUFFER 26880512L
00139 #define SMAXPATCHES 64
00140 #define SMAXFPATCHES 64
00141 #define SSORTIOSIZE 32768L
00142
00143 #define SPECTATORSIZE 1048576L
00144
00145 #define MAXFLEVELS 30
00146
00147 #define COMPINC 2
00148
00149 #define MAXNUMSIZE 10
00150
00151 #define MAXBRACKETBUFFERSIZE 200000
00152
00153 #define SFHSIZE 40
00154
00155 #define DEFAULTPROCESSBUCKETSIZE 1000
00156 #define SHMWINSIZE 65536L
00157
00158 #define TABLEEXTENSION 6
00159
00160 #define GZIPDEFAULT 6
00161 #define DEFAULTTHREADS 0
00162 #define DEFAULTTHREADBUCKETSIZE 500
00163 #define DEFAULTTHREADLOADBALANCING 1
00164 #define THREADSCRATCHSIZE 100000L
00165 #define THREADSCRATCHOUTSIZE 2500000L
00166
00167 #if BITSINWORD == 32
00168     #define MAXTABLECOMBUF 100000000000L
00169     #define MAXCOMBUFRHS 1000000000L
00170 #elif BITSINWORD == 16
00171     #define MAXTABLECOMBUF 1000000L
00172     #define MAXCOMBUFRHS 32500L
00173 #else
```

```

00174     #error Only 64-bit and 32-bit platforms are supported.
00175 #endif
00176
00177 #define NUMSTORECACHES 4
00178 #define SIZESTORECACHE 32768
00179
00180 #define INDENTSPACE 3
00181
00182 #define MULTIINDENTSPACE 1
00183 #define MAXMULTIBRACKETLEVELS 25
00184
00185 #define FBUFFERSIZE 1026
00186 /*
00187     For the random number generator (see commentary there)
00188 */
00189 #define NPAIR1 38
00190 #define NPAIR2 89
00191
00192 #define MAXLINELENGTH 256
00193 #define MINALLOC 32
00194
00195 #define JUMPRATIO 4
00196 /*
00197     Note: MAXCOUPLINGS should be at least MAXPARTICLES/2+1
00198 */
00199 #define MAXPARTICLES 20
00200 #define MAXCOUPLINGS 20
00201 #define NUMOPTIONS 20
00202 #define MAXLEGS 20
00203
00204 #ifdef WITHFLOAT
00205 #define MAXWEIGHT 0
00206 #define DEFAULTPRECISION 1000
00207 #endif

```

4.51 ftypes.h File Reference

This graph shows which files directly or indirectly include this file:



Macros

- #define [WITHOUTERROR](#) 0
- #define [WITHERROR](#) 1
- #define [FILESTREAM](#) 0
- #define [PREVARSTREAM](#) 1
- #define [PREREADSTREAM](#) 2
- #define [PIPESTREAM](#) 3
- #define [PRECALCSTREAM](#) 4
- #define [DOLLARSTREAM](#) 5
- #define [PREREADSTREAM2](#) 6
- #define [EXTERNALCHANNELSTREAM](#) 7
- #define [PREREADSTREAM3](#) 8
- #define [REVERSEFILESTREAM](#) 9
- #define [INPUTSTREAM](#) 10
- #define [ENDOFSTREAM](#) 0xFF
- #define [ENDOFINPUT](#) 0xFF
- #define [SUBROUTINEFILE](#) 0
- #define [PROCEDUREFILE](#) 1
- #define [HEADERFILE](#) 2
- #define [SETUPFILE](#) 3

- #define [TABLEBASEFILE](#) 4
- #define [FIRSTMODULE](#) -1
- #define [GLOBALMODULE](#) 0
- #define [SORTMODULE](#) 1
- #define [STOREMODULE](#) 2
- #define [CLEARMODULE](#) 3
- #define [ENDMODULE](#) 4
- #define [POLYFUN](#) 0
- #define [NOPARALLEL_DOLLAR](#) 0x0001
- #define [NOPARALLEL_RHS](#) 0x0002
- #define [NOPARALLEL_CONVPOLY](#) 0x0004
- #define [NOPARALLEL_SPECTATOR](#) 0x0008
- #define [NOPARALLEL_USER](#) 0x0010
- #define [NOPARALLEL_TBLDOLLAR](#) 0x0100
- #define [NOPARALLEL_NPROC](#) 0x0200
- #define [PARALLELFLAG](#) 0x0000
- #define [PRENOACTION](#) 0
- #define [PRERAISEAFTER](#) 1
- #define [PRELOWERAFTER](#) 2
- #define [WITHSEMICOLON](#) 0
- #define [WITHOUTSEMICOLON](#) 1
- #define [MODULEINSTACK](#) 8
- #define [EXECUTINGIF](#) 0
- #define [LOOKINGFORELSE](#) 1
- #define [LOOKINGFORENDIF](#) 2
- #define [NEWSTATEMENT](#) 1
- #define [OLDSTATEMENT](#) 0
- #define [EXECUTINGPRESWITCH](#) 0
- #define [SEARCHINGPRECASE](#) 1
- #define [SEARCHINGPREENDSWITCH](#) 2
- #define [PREPROONLY](#) 1
- #define [DUMPTOCOMPILER](#) 2
- #define [DUMPOUTTERMS](#) 4
- #define [DUMPINTERMS](#) 8
- #define [DUMPTOSORT](#) 16
- #define [DUMPTOPARALLEL](#) 32
- #define [THREADSDEBUG](#) 64
- #define [ERROROUT](#) 0
- #define [INPUTOUT](#) 1
- #define [STATSOUT](#) 2
- #define [EXPRSOUT](#) 3
- #define [WRITEOUT](#) 4
- #define [EXTERNALCHANNELOUT](#) 5
- #define [NUMERICLOOP](#) 0
- #define [LISTEDLOOP](#) 1
- #define [ONEEXPRESSION](#) 2
- #define [PRETYPENONE](#) 0
- #define [PRETYPEIF](#) 1
- #define [PRETYPEDO](#) 2
- #define [PRETYPEPROCEDURE](#) 3
- #define [PRETYPESWITCH](#) 4
- #define [PRETYPEINSIDE](#) 5
- #define [DECLARATION](#) 1
- #define [SPECIFICATION](#) 2
- #define [DEFINITION](#) 3

- #define STATEMENT 4
- #define TOOOUTPUT 5
- #define ATENDOFMODULE 6
- #define MIXED2 8
- #define MIXED 9
- #define NOAUTO 0
- #define PARTEST 1
- #define WITHAUTO 2
- #define ALLVARIABLES -1
- #define SYMBOLONLY 1
- #define INDEXONLY 2
- #define VECTORONLY 4
- #define FUNCTIONONLY 8
- #define SETONLY 16
- #define EXPRESSIONONLY 32

Defines: compiler types

Type of variable found by the compiler.

- #define CDELETE -1
- #define ANYTYPE -1
- #define CSYMBOL 0
- #define CINDEX 1
- #define CVECTOR 2
- #define CFUNCTION 3
- #define CSET 4
- #define CEXPRESSION 5
- #define CDOTPRODUCT 6
- #define CNUMBER 7
- #define CSUBEXP 8
- #define CDELTA 9
- #define CDOLLAR 10
- #define CDUBIOUS 11
- #define CRANGE 12
- #define CMODEL 13
- #define CVECTOR1 21
- #define CDOUBLEDOT 22
- #define TSYMBOL -1
- #define TINDEX -2
- #define TVECTOR -3
- #define TFUNCTION -4
- #define TSET -5
- #define TEXPRESSSION -6
- #define TDOTPRODUCT -7
- #define TNUMBER -8
- #define TSUBEXP -9
- #define TDELTA -10
- #define TDOLLAR -11
- #define TDUBIOUS -12
- #define LPARENTHESIS -13
- #define RPARENTHESIS -14
- #define TWILDCARD -15
- #define TWILDARG -16
- #define TDOT -17
- #define LBRACE -18
- #define RBRACE -19
- #define TCOMMA -20
- #define TFUNOPEN -21
- #define TFUNCLOSE -22
- #define TMULTIPLY -23
- #define TDIVIDE -24

- #define [TPOWER](#) -25
- #define [TPLUS](#) -26
- #define [TMINUS](#) -27
- #define [TNOT](#) -28
- #define [TENDOFIT](#) -29
- #define [TSETOPEN](#) -30
- #define [TSETCLOSE](#) -31
- #define [TGENINDEX](#) -32
- #define [TCONJUGATE](#) -33
- #define [LRPARENTHESSES](#) -34
- #define [TNUMBER1](#) -35
- #define [TPOWER1](#) -36
- #define [EMPTY](#) -37
- #define [TSETNUM](#) -38
- #define [TSGAMMA](#) -39
- #define [TSETDOL](#) -40
- #define [TFLOAT](#) -41
- #define [TYPEISFUN](#) 0
- #define [TYPEISSUB](#) 1
- #define [TYPEISMYSTERY](#) -1
- #define [LHSIDEX](#) 2
- #define [LHSIDE](#) 1
- #define [RHSIDE](#) 0
- #define [FORTRANMODE](#) 1
- #define [REDUCEMODE](#) 2
- #define [MAPLEMODE](#) 3
- #define [MATHEMATICAMODE](#) 4
- #define [CMODE](#) 5
- #define [VORTRANMODE](#) 6
- #define [PFORTRANMODE](#) 7
- #define [DOUBLEFORTRANMODE](#) 33
- #define [DOUBLEPRECISIONFLAG](#) 32
- #define [NODOUBLEMASK](#) 31
- #define [QUADRUPLEFORTRANMODE](#) 65
- #define [QUADRUPLEPRECISIONFLAG](#) 64
- #define [ALLINTEGERDOUBLE](#) 128
- #define [NOQUADMASK](#) 63
- #define [NORMALFORMAT](#) 0
- #define [NOSPACEFORMAT](#) 1
- #define [ISNOTFORTRAN90](#) 0
- #define [ISFORTRAN90](#) 1
- #define [ALSOREVERSE](#) 1
- #define [CHISHOLM](#) 2
- #define [NOTRICK](#) 16
- #define [SORTLOWFIRST](#) 0
- #define [SORTHIGHFIRST](#) 1
- #define [SORTPOWERFIRST](#) 2
- #define [SORTANTIPOWER](#) 3
- #define [STATSSPLITMERGE](#) 0
- #define [STATSMERGETOFILE](#) 1
- #define [STATSPOSTSORT](#) 2
- #define [NOCHECKLOGTYPE](#) 0
- #define [CHECKLOGTYPE](#) 1
- #define [NMIN4SHIFT](#) 4
- #define [SYMBOL](#) 1
- #define [DOTPRODUCT](#) 2
- #define [VECTOR](#) 3
- #define [INDEX](#) 4
- #define [EXPRESSION](#) 5
- #define [SUBEXPRESSION](#) 6
- #define [DOLLAREXPRESSION](#) 7
- #define [SETSET](#) 8
- #define [ARGWILD](#) 9
- #define [MINVECTOR](#) 10

- #define SETEXP 11
- #define DOLLAREXP2 12
- #define HAAKJE0 9
- #define FUNCTION 20
- #define TMPPOLYFUN 14
- #define ARGFIELD 15
- #define SNUMBER 16
- #define LNUMBER 17
- #define HAAKJE 18
- #define DELTA 19
- #define EXPONENT 20
- #define DENOMINATOR 21
- #define SETFUNCTION 22
- #define GAMMA 23
- #define GAMMAI 24
- #define GAMMAFIVE 25
- #define GAMMASIX 26
- #define GAMMASEVEN 27
- #define SUMF1 28
- #define SUMF2 29
- #define DUMFUN 30
- #define REPLACEMENT 31
- #define REVERSEFUNCTION 32
- #define DISTRIBUTION 33
- #define DELTA3 34
- #define DUMMYFUN 35
- #define DUMMYTEN 36
- #define LEVICIVITA 37
- #define FACTORIAL 38
- #define INVERSEFACTORIAL 39
- #define BINOMIAL 40
- #define NUMARGSFUN 41
- #define SIGNFUN 42
- #define MODFUNCTION 43
- #define MOD2FUNCTION 44
- #define MINFUNCTION 45
- #define MAXFUNCTION 46
- #define ABSFUNCTION 47
- #define SIGFUNCTION 48
- #define INTFUNCTION 49
- #define THETA 50
- #define THETA2 51
- #define DELTA2 52
- #define DELTAP 53
- #define BERNOULLIFUNCTION 54
- #define COUNTFUNCTION 55
- #define MATCHFUNCTION 56
- #define PATTERNFUNCTION 57
- #define TERMFUNCTION 58
- #define CONJUGATION 59
- #define ROOTFUNCTION 60
- #define TABLEFUNCTION 61
- #define FIRSTBRACKET 62
- #define TERMSINEXPR 63
- #define NUMTERMSFUN 64
- #define GCDFUNCTION 65
- #define DIVFUNCTION 66
- #define REMFUNCTION 67
- #define MAXPOWEROF 68
- #define MINPOWEROF 69
- #define TABLESTUB 70
- #define FACTORIN 71
- #define TERMSINBRACKET 72
- #define WILDARGFUN 73

- `#define` [SQRTFUNCTION](#) 74
- `#define` [LNFUNCTION](#) 75
- `#define` [SINFUNCTION](#) 76
- `#define` [COSFUNCTION](#) 77
- `#define` [TANFUNCTION](#) 78
- `#define` [ASINFUNCTION](#) 79
- `#define` [ACOSFUNCTION](#) 80
- `#define` [ATANFUNCTION](#) 81
- `#define` [ATAN2FUNCTION](#) 82
- `#define` [SINHFUNCTION](#) 83
- `#define` [COSHFUNCTION](#) 84
- `#define` [TANHFUNCTION](#) 85
- `#define` [ASINHFUNCTION](#) 86
- `#define` [ACOSHFUNCTION](#) 87
- `#define` [ATANHFUNCTION](#) 88
- `#define` [LI2FUNCTION](#) 89
- `#define` [LINFUNCTION](#) 90
- `#define` [EXTRASYMFUN](#) 91
- `#define` [RANDOMFUNCTION](#) 92
- `#define` [RANPERM](#) 93
- `#define` [NUMFACTORS](#) 94
- `#define` [FIRSTTERM](#) 95
- `#define` [CONTENTTERM](#) 96
- `#define` [PRIMENUMBER](#) 97
- `#define` [EXTEUCLIDEAN](#) 98
- `#define` [MAKERATIONAL](#) 99
- `#define` [INVERSEFUNCTION](#) 100
- `#define` [IDFUNCTION](#) 101
- `#define` [PUTFIRST](#) 102
- `#define` [PERMUTATIONS](#) 103
- `#define` [PARTITIONS](#) 104
- `#define` [MULFUNCTION](#) 105
- `#define` [MOEBIUS](#) 106
- `#define` [TOPOLOGIES](#) 107
- `#define` [DIAGRAMS](#) 108
- `#define` [TOPO](#) 109
- `#define` [NODEFUNCTION](#) 110
- `#define` [EDGE](#) 111
- `#define` [SIZEOFFUNCTION](#) 112
- `#define` [BLOCK](#) 113
- `#define` [ONEPI](#) 114
- `#define` [PHI](#) 115
- `#define` [FLOATFUN](#) 116
- `#define` [TOFLOAT](#) 117
- `#define` [TORAT](#) 118
- `#define` [MZV](#) 119
- `#define` [EULER](#) 120
- `#define` [MZVHALF](#) 121
- `#define` [AGMFUNCTION](#) 122
- `#define` [GAMMAFUN](#) 123
- `#define` [EXPFUNCTION](#) 124
- `#define` [HPLFUNCTION](#) 125
- `#define` [MPLFUNCTION](#) 126
- `#define` [MAXBUILTINFUNCTION](#) 126
- `#define` [FIRSTUSERFUNCTION](#) 150
- `#define` [ALLFUNCTIONS](#) -1
- `#define` [ALLMZVFUNCTIONS](#) -2
- `#define` [ISYMBOL](#) 0
- `#define` [PISYMBOL](#) 1
- `#define` [COEFFSYMBOL](#) 2
- `#define` [NUMERATORSYMBOL](#) 3
- `#define` [DENOMINATORSYMBOL](#) 4
- `#define` [WILDARGSYMBOL](#) 5
- `#define` [DIMENSIONSYMBOL](#) 6

- #define [FACTORSYMBOL](#) 7
- #define [SEPARATESYMBOL](#) 8
- #define [EESYMBOL](#) 9
- #define [EMSYMBOL](#) 10
- #define [BUILTINSYMBOLS](#) 11
- #define [FIRSTUSERSYMBOL](#) 20
- #define [BUILTININDICES](#) 1
- #define [BUILTINVECTORS](#) 1
- #define [BUILTINDOLLARS](#) 1
- #define [WILDARGVECTOR](#) 0
- #define [WILDARGINDEX](#) 0
- #define [TYPEEXPRESSION](#) 0
- #define [TYPEIDNEW](#) 1
- #define [TYPEIDOLD](#) 2
- #define [TYPEOPERATION](#) 3
- #define [TYPEREPEAT](#) 4
- #define [TYPEENDREPEAT](#) 5
- #define [TYPECOUNT](#) 20
- #define [TYPEMULT](#) 21
- #define [TYPEGOTO](#) 22
- #define [TYPEDISCARD](#) 23
- #define [TYPEIF](#) 24
- #define [TYPEELSE](#) 25
- #define [TYPEELIF](#) 26
- #define [TYPEENDIF](#) 27
- #define [TYPESUM](#) 28
- #define [TYPECHISHOLM](#) 29
- #define [TYPEREVERSE](#) 30
- #define [TYPEARG](#) 31
- #define [TYPENORM](#) 32
- #define [TYPENORM2](#) 33
- #define [TYPENORM3](#) 34
- #define [TYPEEXIT](#) 35
- #define [TYPESETEXIT](#) 36
- #define [TYPEPRINT](#) 37
- #define [TYPEFPRINT](#) 38
- #define [TYPEREDEFPRE](#) 39
- #define [TYPESPLITARG](#) 40
- #define [TYPESPLITARG2](#) 41
- #define [TYPEFACTARG](#) 42
- #define [TYPEFACTARG2](#) 43
- #define [TYPETRY](#) 44
- #define [TYPEASSIGN](#) 45
- #define [TYPERENUMBER](#) 46
- #define [TYPESUMFIX](#) 47
- #define [TYPEFINDLOOP](#) 48
- #define [TYPEUNRAVEL](#) 49
- #define [TYPEADJUSTBOUNDS](#) 50
- #define [TYPEINSIDE](#) 51
- #define [TYPETERM](#) 52
- #define [TYPESORT](#) 53
- #define [TYPEDETCURDUM](#) 54
- #define [TYPEINEXPRESSION](#) 55
- #define [TYPESPLITFIRSTARG](#) 56
- #define [TYPESPLITLASTARG](#) 57
- #define [TYPEMERGE](#) 58
- #define [TYPETESTUSE](#) 59
- #define [TYPEAPPLY](#) 60
- #define [TYPEAPPLYRESET](#) 61
- #define [TYPECHAININ](#) 62
- #define [TYPECHAINOUT](#) 63
- #define [TYPENORM4](#) 64
- #define [TYPEFACTOR](#) 65
- #define [TYPEARGIMPLODE](#) 66

- #define TYPEARGEXPLODE 67
- #define TYPEDENOMINATORS 68
- #define TYPESTUFFLE 69
- #define TYPEDROPCOEFFICIENT 70
- #define TYPETRANSFORM 71
- #define TYPETOPOLYNOMIAL 72
- #define TYPEFROMPOLYNOMIAL 73
- #define TYPEDOLOOP 74
- #define TYPEENDDOLOOP 75
- #define TYPEDROPSYMBOLS 76
- #define TYPEPUTINSIDE 77
- #define TYPETOSPECTATOR 78
- #define TYPEARGTOEXTRASymbol 79
- #define TYPECANONICALIZE 80
- #define TYPESWITCH 81
- #define TYPEENDSWITCH 82
- #define TYPESETUSERFLAG 83
- #define TYPECLEARUSERFLAG 84
- #define TYPEALLLOOPS 85
- #define TYPEALLPATHS 86
- #define TAKETRACE 1
- #define CONTRACT 2
- #define RATIO 3
- #define SYMMETRIZE 4
- #define TENVEC 5
- #define SUMNUM1 6
- #define SUMNUM2 7
- #define WILDDUMMY 0
- #define SYMTONUM 1
- #define SYMTOSYM 2
- #define SYMTOSUB 3
- #define VECTOMIN 4
- #define VECTOVEC 5
- #define VECTOSUB 6
- #define INDTOIND 7
- #define INDTOSUB 8
- #define FUNTOFUN 9
- #define ARGTOARG 10
- #define ARLTOARL 11
- #define EXPTOEXP 12
- #define FROMBRAC 13
- #define FROMSET 14
- #define SETTONUM 15
- #define WILDCARDS 16
- #define SETNUMBER 17
- #define LOADDOLLAR 18
- #define NUMTONUM 20
- #define NUMTOSYM 21
- #define NUMTOIND 22
- #define NUMTOSUB 23
- #define EATTENSOR 0x2000
- #define CLEANFLAG 0
- #define DIRTYFLAG 1
- #define DIRTYSYMFLAG 2
- #define MUSTCLEANPRF 4
- #define SUBTERMUSED1 8
- #define SUBTERMUSED2 16
- #define ALLDIRTY (DIRTYFLAG|DIRTYSYMFLAG)
- #define ARGHEAD 2
- #define FUNHEAD 3
- #define SUBEXPSIZE 5
- #define EXPRHEAD 5
- #define TYPEARGHEADSIZE 6
- #define SKIP 1

- #define [DROP](#) 2
- #define [HIDE](#) 3
- #define [UNHIDE](#) 4
- #define [INTOHIDE](#) 5
- #define [LOCALEXPRESSION](#) 0
- #define [SKIPLEXPRESSION](#) 1
- #define [DROPLEXPRESSION](#) 2
- #define [DROPEDEXPRESSION](#) 3
- #define [GLOBALEXPRESSION](#) 4
- #define [SKIPGEXPRESSION](#) 5
- #define [DROPGEXPRESSION](#) 6
- #define [STOREDEXPRESSION](#) 8
- #define [HIDDENLEXPRESSION](#) 9
- #define [HIDDENGEXPRESSION](#) 13
- #define [INCEXPRESSION](#) 9
- #define [HIDELEXPRESSION](#) 10
- #define [HIDEGEXPRESSION](#) 14
- #define [DROPHLEXPRESSION](#) 11
- #define [DROPHGEXPRESSION](#) 15
- #define [UNHIDELEXPRESSION](#) 12
- #define [UNHIDEGEXPRESSION](#) 16
- #define [INTOHIDELEXPRESSION](#) 17
- #define [INTOHIDEGEXPRESSION](#) 18
- #define [SPECTATOREXPRESSION](#) 19
- #define [DROPSPECTATOREXPRESSION](#) 20
- #define [SKIPUNHIDELEXPRESSION](#) 21
- #define [SKIPUNHIDEGEXPRESSION](#) 22
- #define [PRINTOFF](#) 0
- #define [PRINTON](#) 1
- #define [PRINTCONTENTS](#) 2
- #define [PRINTCONTENT](#) 3
- #define [PRINTLFILE](#) 4
- #define [PRINTONETERM](#) 8
- #define [PRINTONEFUNCTION](#) 16
- #define [PRINTALL](#) 32
- #define [REGULAREXPRESSION](#) -1
- #define [REDEFINEDEXPRESSION](#) -2
- #define [NEWLYDEFINEDEXPRESSION](#) -3

Defines: function specs

Function specifications.

- #define [VERTEXFUNCTION](#) -1
- #define [GENERALFUNCTION](#) 0
- #define [TENSORFUNCTION](#) 2
- #define [GAMMAFUNCTION](#) 4
- #define [POS_](#) 0 /* integer > 0 */
- #define [POS0_](#) 1 /* integer >= 0 */
- #define [NEG_](#) 2 /* integer < 0 */
- #define [NEG0_](#) 3 /* integer <= 0 */
- #define [EVEN_](#) 4 /* integer (even) */
- #define [ODD_](#) 5 /* integer (odd) */
- #define [Z_](#) 6 /* integer */
- #define [SYMBOL_](#) 7 /* symbol only */
- #define [FIXED_](#) 8 /* fixed index */
- #define [INDEX_](#) 9 /* index only */
- #define [Q_](#) 10 /* rational */
- #define [DUMMYINDEX_](#) 11 /* dummy index only */
- #define [VECTOR_](#) 12 /* vector only */
- #define [GAMMA1](#) 0
- #define [GAMMA5](#) -1
- #define [GAMMA6](#) -2
- #define [GAMMA7](#) -3

- #define FUNNYVEC -4
- #define FUNNYWILD -5
- #define SUMMEDIND -6
- #define NOINDEX -7
- #define FUNNYDOLLAR -8
- #define EMPTYINDEX -9
- #define MINSPEC -10
- #define USEDFLAG 2
- #define DUMMYFLAG 1
- #define MAINSORT 0
- #define FUNCTIONSORT 1
- #define SUBSORT 2
- #define FLOATMODE 1
- #define RATIONALMODE 0
- #define NUMSPECSETS 10
- #define ISZERO 1
- #define ISUNMODIFIED 2
- #define ISCOMPRESSED 4
- #define ISINRHS 8
- #define ISFACTORIZED 16
- #define TOBEFACTORED 32
- #define TOBEUNFACTORED 64
- #define KEEPZERO 128
- #define VARTYPENONE 0
- #define VARTYPECOMPLEX 1
- #define VARTYPEIMAGINARY 2
- #define VARTYPEROOTOFUNITY 4
- #define VARTYPEMINUS 8
- #define CYCLESYMMETRIC 1
- #define RCYCLESYMMETRIC 2
- #define SYMMETRIC 3
- #define ANTISYMMETRIC 4
- #define REVERSEORDER 256
- #define SUBMULTI 1
- #define SUBONCE 2
- #define SUBONLY 3
- #define SUBMANY 4
- #define SUBVECTOR 5
- #define SUBSELECT 6
- #define SUBALL 7
- #define SUBMASK 15
- #define SUBDISORDER 16
- #define SUBAFTER 32
- #define SUBAFTERNOT 64
- #define IDHEAD 6
- #define DOLLARFLAG 1
- #define NORMALIZEFLAG 2
- #define GIDENT 1
- #define GFIVE 4
- #define GPLUS 3
- #define GMINUS 2
- #define LONGNUMBER 1
- #define MATCH 2
- #define COEFFI 3
- #define SUBEXPR 4
- #define MULTIPLEOF 5
- #define IFDOLLAR 6
- #define IFEXPRESSION 7
- #define IFDOLLAREXTRA 8
- #define IFISFACTORIZED 9
- #define IFOCCURS 10
- #define IFUSERFLAG 11
- #define IFFLOATNUMBER 12
- #define GREATER 0

- #define GREATEREQUAL 1
- #define LESS 2
- #define LESSEQUAL 3
- #define EQUAL 4
- #define NOTEQUAL 5
- #define ORCOND 6
- #define ANDCOND 7
- #define DUMMY 1
- #define SORT 1
- #define STORE 2
- #define END 3
- #define GLOBAL 4
- #define CLEAR 5
- #define VECTBIT 1
- #define DOTPBIT 2
- #define FUNBIT 4
- #define SETBIT 8
- #define EXTRAPARAMETER 0x4000
- #define GENCOMMUTE 0
- #define GENNONCOMMUTE 0x2000
- #define NAMENOTFOUND -9
- #define DOLUNDEFINED 0
- #define DOLNUMBER 1
- #define DOLARGUMENT 2
- #define DOLSUBTERM 3
- #define DOLTERMS 4
- #define DOLWILDARGS 5
- #define DOLINDEX 6
- #define DOLZERO 7
- #define FINDLOOP 0
- #define REPLACELOOP 1
- #define NOFUNPOWERS 0
- #define COMFUNPOWERS 1
- #define ALLFUNPOWERS 2
- #define PROPERORDERFLAG 0
- #define REGULAR 0
- #define FINISH 1
- #define POLYADD 1
- #define POLYSUB 2
- #define POLYMUL 3
- #define POLYDIV 4
- #define POLYREM 5
- #define POLYGCD 6
- #define POLYINTFAC 7
- #define POLYNORM 8
- #define MODNONE 0
- #define MODSUM 1
- #define MODMAX 2
- #define MODMIN 3
- #define MODLOCAL 4
- #define ELEMENTUSED 1
- #define ELEMENTLOADED 2
- #define POSNEG 0x1
- #define INVERSETABLE 0x2
- #define COEFFICIENTSONLY 0x4
- #define ALSOPOWERS 0x8
- #define ALSOFUNARGS 0x10
- #define ALSODOLLARS 0x20
- #define NOINVERSES 0x40
- #define POSITIVEONLY 0
- #define UNPACK 0x80
- #define NOUNPACK 0
- #define FROMFUNCTION 0x100
- #define VARNAMES 0

- #define AUTONAMES 1
- #define EXPRNAMES 2
- #define DOLLARNAMES 3
- #define DUMMYBUFFER 1
- #define ALLARGS 1
- #define NUMARG 2
- #define ARGRANGE 3
- #define MAKEARGS 4
- #define MAXRANGEINDICATOR 4
- #define REPLACEARG 5
- #define ENCODEARG 6
- #define DECODEARG 7
- #define IMplodeARG 8
- #define EXPLODEARG 9
- #define PERMUTEARG 10
- #define REVERSEARG 11
- #define CYCLEARG 12
- #define ISLYNDON 13
- #define ISLYNDONR 14
- #define TOLYNDON 15
- #define TOLYNDONR 16
- #define ADDARG 17
- #define MULTIPLYARG 18
- #define DROPARG 19
- #define SELECTARG 20
- #define DEDUPARG 21
- #define ZTOHARG 22
- #define HTOZARG 23
- #define BASECODE 1
- #define YESLYNDON 1
- #define NOLYNDON 2
- #define TOPOLYNOMIALFLAG 1
- #define FACTARGFLAG 2
- #define OLDFACTARG 1
- #define NEWFACTARG 0
- #define FROMMODULEOPTION 0
- #define FROMPOINTINSTRUCTION 1
- #define EXTRASYMBOL 0
- #define REGULARSYMBOL 1
- #define EXPRESSIONNUMBER 2
- #define O_NONE 0
- #define O_CSE 1
- #define O_CSEGREEDY 2
- #define O_GREEDY 3
- #define O_OCCURRENCE 0
- #define O_MCTS 1
- #define O_SIMULATED_ANNEALING 2
- #define O_FORWARD 0
- #define O_BACKWARD 1
- #define O_FORWARDORBACKWARD 2
- #define O_FORWARDANDBACKWARD 3
- #define OPTHEAD 3
- #define DOALL 1
- #define ONLYFUNCTIONS 2
- #define INUSE 1
- #define COULDCOMMUTE 2
- #define DOESNOTCOMMUTE 4
- #define DICT_NONUMBERS 0
- #define DICT_INTEGERONLY 1
- #define DICT_RATIONALONLY 2
- #define DICT_ALLNUMBERS 3
- #define DICT_NOVARIABLES 0
- #define DICT_DOVARIABLES 1
- #define DICT_NOSPECIALS 0

- #define [DICT_DOSPECIALS](#) 1
- #define [DICT_NOFUNWITHARGS](#) 0
- #define [DICT_DOFUNWITHARGS](#) 1
- #define [DICT_NOTINDOLLARS](#) 0
- #define [DICT_INDOLLARS](#) 1
- #define [DICT_INTEGERNUMBER](#) 1
- #define [DICT_RATIONALNUMBER](#) 2
- #define [DICT_SYMBOL](#) 3
- #define [DICT_VECTOR](#) 4
- #define [DICT_INDEX](#) 5
- #define [DICT_FUNCTION](#) 6
- #define [DICT_FUNCTION_WITH_ARGUMENTS](#) 7
- #define [DICT_SPECIALCHARACTER](#) 8
- #define [DICT_RANGE](#) 9
- #define [READSPECTATORFLAG](#) 3
- #define [GLOBALSPECTATORFLAG](#) 1
- #define [ORDEREDSET](#) 1
- #define [DENSETABLE](#) 1
- #define [SPARSETABLE](#) 0
- #define [TOPOLOGIESONLY](#) 1
- #define [WITHOUTNODES](#) 2
- #define [WITHEDGES](#) 4
- #define [WITHBLOCKS](#) 8
- #define [WITHONEPISETS](#) 16
- #define [WITHSYMMETRIZEI](#) 32
- #define [WITHSYMMETRIZEF](#) 64
- #define [CHECKEXTERN](#) 128
- #define [ONEPARTI](#) 256
- #define [ONEPARTR](#) 512
- #define [ON SHELL](#) 1024
- #define [OFFSHELL](#) 2048
- #define [NOSIGMA](#) 4096
- #define [SIGMA](#) 8192
- #define [NOSNAIL](#) 16384
- #define [SNAIL](#) 32768
- #define [NOTADPOLE](#) 65536
- #define [TADPOLE](#) 131072
- #define [SIMPLE](#) 262144
- #define [NOTSIMPLE](#) 524288
- #define [BIPART](#) 1048576
- #define [NONBIPART](#) 2097152
- #define [CYCLI](#) 4194304
- #define [CYCLR](#) 8388608
- #define [FLOOP](#) 16777216
- #define [NOTFLOOP](#) 33554432

Typedefs

- typedef void(* [PVFUNWP](#)) ()
- typedef void(* [PVFUNV](#)) ()
- typedef int(* [CFUN](#)) ()
- typedef int(* [TFUN](#)) ()
- typedef int(* [TFUN1](#)) ()

4.51.1 Detailed Description

Contains the definitions of many internal codes Rather than using numbers directly we do this by defines, making it much easier to change things. Changing things is sometimes also a good way of testing the code.

Definition in file [ftypes.h](#).

4.51.2 Macro Definition Documentation

4.51.2.1 WITHOUTERROR

```
#define WITHOUTERROR 0
```

The next macros were introduced when TFORM was programmed. In the case of workers, each worker may need some private data. These can in principle be accessed by some posix calls but that is unnecessarily slow. The passing of a pointer to the complete data struct with private data will be much faster. And anyway, there would have to be a macro that either makes the posix call (TFORM) or doesn't (FORM). The solution by having macro's that either pass the pointer (TFORM) or don't pass it (FORM) is seen as the best solution.

In the declarations and the calling of the functions we have to use the PHEAD or the BHEAD macro, respectively, if the pointer is to be passed. These macro's contain the comma as well. Hence we need special macro's if there are no other arguments. These are called PHEAD0 and BHEAD0.

Definition at line 51 of file [ftypes.h](#).

4.51.2.2 WITHERROR

```
#define WITHERROR 1
```

Definition at line 52 of file [ftypes.h](#).

4.51.2.3 FILESTREAM

```
#define FILESTREAM 0
```

Definition at line 58 of file [ftypes.h](#).

4.51.2.4 PREVARSTREAM

```
#define PREVARSTREAM 1
```

Definition at line 59 of file [ftypes.h](#).

4.51.2.5 PREREADSTREAM

```
#define PREREADSTREAM 2
```

Definition at line 60 of file [ftypes.h](#).

4.51.2.6 PIPESTREAM

```
#define PIPESTREAM 3
```

Definition at line 61 of file [ftypes.h](#).

4.51.2.7 PRECALCSTREAM

```
#define PRECALCSTREAM 4
```

Definition at line 62 of file [ftypes.h](#).

4.51.2.8 DOLLARSTREAM

```
#define DOLLARSTREAM 5
```

Definition at line 63 of file [ftypes.h](#).

4.51.2.9 PREREADSTREAM2

```
#define PREREADSTREAM2 6
```

Definition at line 64 of file [ftypes.h](#).

4.51.2.10 EXTERNALCHANNELSTREAM

```
#define EXTERNALCHANNELSTREAM 7
```

Definition at line 65 of file [ftypes.h](#).

4.51.2.11 PREREADSTREAM3

```
#define PREREADSTREAM3 8
```

Definition at line 66 of file [ftypes.h](#).

4.51.2.12 REVERSEFILESTREAM

```
#define REVERSEFILESTREAM 9
```

Definition at line 67 of file [ftypes.h](#).

4.51.2.13 INPUTSTREAM

```
#define INPUTSTREAM 10
```

Definition at line 68 of file [ftypes.h](#).

4.51.2.14 ENDOFSTREAM

```
#define ENDOFSTREAM 0xFF
```

Definition at line 70 of file [ftypes.h](#).

4.51.2.15 ENDOFINPUT

```
#define ENDOFINPUT 0xFF
```

Definition at line 71 of file [ftypes.h](#).

4.51.2.16 SUBROUTINEFILE

```
#define SUBROUTINEFILE 0
```

Definition at line 77 of file [ftypes.h](#).

4.51.2.17 PROCEDUREFILE

```
#define PROCEDUREFILE 1
```

Definition at line 78 of file [ftypes.h](#).

4.51.2.18 HEADERFILE

```
#define HEADERFILE 2
```

Definition at line 79 of file [ftypes.h](#).

4.51.2.19 SETUPFILE

```
#define SETUPFILE 3
```

Definition at line 80 of file [ftypes.h](#).

4.51.2.20 TABLEBASEFILE

```
#define TABLEBASEFILE 4
```

Definition at line 81 of file [ftypes.h](#).

4.51.2.21 FIRSTMODULE

```
#define FIRSTMODULE -1
```

Definition at line 87 of file [ftypes.h](#).

4.51.2.22 GLOBALMODULE

```
#define GLOBALMODULE 0
```

Definition at line 88 of file [ftypes.h](#).

4.51.2.23 SORTMODULE

```
#define SORTMODULE 1
```

Definition at line 89 of file [ftypes.h](#).

4.51.2.24 STOREMODULE

```
#define STOREMODULE 2
```

Definition at line 90 of file [ftypes.h](#).

4.51.2.25 CLEARMODULE

```
#define CLEARMODULE 3
```

Definition at line 91 of file [ftypes.h](#).

4.51.2.26 ENDMODULE

```
#define ENDMODULE 4
```

Definition at line 92 of file [ftypes.h](#).

4.51.2.27 POLYFUN

```
#define POLYFUN 0
```

Definition at line 94 of file [ftypes.h](#).

4.51.2.28 NOPARALLEL_DOLLAR

```
#define NOPARALLEL_DOLLAR 0x0001
```

Definition at line 96 of file [ftypes.h](#).

4.51.2.29 NOPARALLEL_RHS

```
#define NOPARALLEL_RHS 0x0002
```

Definition at line 97 of file [ftypes.h](#).

4.51.2.30 NOPARALLEL_CONVPOLY

```
#define NOPARALLEL_CONVPOLY 0x0004
```

Definition at line 98 of file [ftypes.h](#).

4.51.2.31 NOPARALLEL_SPECTATOR

```
#define NOPARALLEL_SPECTATOR 0x0008
```

Definition at line 99 of file [ftypes.h](#).

4.51.2.32 NOPARALLEL_USER

```
#define NOPARALLEL_USER 0x0010
```

Definition at line 100 of file [ftypes.h](#).

4.51.2.33 NOPARALLEL_TBLDOLLAR

```
#define NOPARALLEL_TBLDOLLAR 0x0100
```

Definition at line 101 of file [ftypes.h](#).

4.51.2.34 NOPARALLEL_NPROC

```
#define NOPARALLEL_NPROC 0x0200
```

Definition at line 102 of file [ftypes.h](#).

4.51.2.35 PARALLELFLAG

```
#define PARALLELFLAG 0x0000
```

Definition at line 103 of file [ftypes.h](#).

4.51.2.36 PRENOACTION

```
#define PRENOACTION 0
```

Definition at line 105 of file [ftypes.h](#).

4.51.2.37 PRERAISEAFTER

```
#define PRERAISEAFTER 1
```

Definition at line 106 of file [ftypes.h](#).

4.51.2.38 PRELOWERAFTER

```
#define PRELOWERAFTER 2
```

Definition at line 107 of file [ftypes.h](#).

4.51.2.39 WITHSEMICOLON

```
#define WITHSEMICOLON 0
```

Definition at line 114 of file [ftypes.h](#).

4.51.2.40 WITHOUTSEMICOLON

```
#define WITHOUTSEMICOLON 1
```

Definition at line 115 of file [ftypes.h](#).

4.51.2.41 MODULEINSTACK

```
#define MODULEINSTACK 8
```

Definition at line 116 of file [ftypes.h](#).

4.51.2.42 EXECUTINGIF

```
#define EXECUTINGIF 0
```

Definition at line 117 of file [ftypes.h](#).

4.51.2.43 LOOKINGFORELSE

```
#define LOOKINGFORELSE 1
```

Definition at line 118 of file [ftypes.h](#).

4.51.2.44 LOOKINGFORENDIF

```
#define LOOKINGFORENDIF 2
```

Definition at line 119 of file [ftypes.h](#).

4.51.2.45 NEWSTATEMENT

```
#define NEWSTATEMENT 1
```

Definition at line 120 of file [ftypes.h](#).

4.51.2.46 OLDSTATEMENT

```
#define OLDSTATEMENT 0
```

Definition at line 121 of file [ftypes.h](#).

4.51.2.47 EXECUTINGPRESWITCH

```
#define EXECUTINGPRESWITCH 0
```

Definition at line 123 of file [ftypes.h](#).

4.51.2.48 SEARCHINGPRECASE

```
#define SEARCHINGPRECASE 1
```

Definition at line 124 of file [ftypes.h](#).

4.51.2.49 SEARCHINGPREENDSWITCH

```
#define SEARCHINGPREENDSWITCH 2
```

Definition at line 125 of file [ftypes.h](#).

4.51.2.50 PREPROONLY

```
#define PREPROONLY 1
```

Definition at line 127 of file [ftypes.h](#).

4.51.2.51 DUMPTOCOMPILER

```
#define DUMPTOCOMPILER 2
```

Definition at line 128 of file [ftypes.h](#).

4.51.2.52 DUMPOUTTERMS

```
#define DUMPOUTTERMS 4
```

Definition at line 129 of file [ftypes.h](#).

4.51.2.53 DUMPINTERMS

```
#define DUMPINTERMS 8
```

Definition at line 130 of file [ftypes.h](#).

4.51.2.54 DUMPTOSORT

```
#define DUMPTOSORT 16
```

Definition at line 131 of file [ftypes.h](#).

4.51.2.55 DUMPTOPARALLEL

```
#define DUMPTOPARALLEL 32
```

Definition at line 132 of file [ftypes.h](#).

4.51.2.56 THREADSDEBUG

```
#define THREADSDEBUG 64
```

Definition at line 133 of file [ftypes.h](#).

4.51.2.57 ERROROUT

```
#define ERROROUT 0
```

Definition at line 135 of file [ftypes.h](#).

4.51.2.58 INPUTOUT

```
#define INPUTOUT 1
```

Definition at line 136 of file [ftypes.h](#).

4.51.2.59 STATSOUT

```
#define STATSOUT 2
```

Definition at line 137 of file [ftypes.h](#).

4.51.2.60 EXPRSOUT

```
#define EXPRSOUT 3
```

Definition at line 138 of file [ftypes.h](#).

4.51.2.61 WRITEOUT

```
#define WRITEOUT 4
```

Definition at line 139 of file [ftypes.h](#).

4.51.2.62 EXTERNALCHANNELOUT

```
#define EXTERNALCHANNELOUT 5
```

Definition at line 141 of file [ftypes.h](#).

4.51.2.63 NUMERICALLOOP

```
#define NUMERICALLOOP 0
```

Definition at line 143 of file [ftypes.h](#).

4.51.2.64 LISTEDLOOP

```
#define LISTEDLOOP 1
```

Definition at line 144 of file [ftypes.h](#).

4.51.2.65 ONEEXPRESSION

```
#define ONEEXPRESSION 2
```

Definition at line 145 of file [ftypes.h](#).

4.51.2.66 PRETYPENONE

```
#define PRETYPENONE 0
```

Definition at line 147 of file [ftypes.h](#).

4.51.2.67 PRETYPEIF

```
#define PRETYPEIF 1
```

Definition at line 148 of file [ftypes.h](#).

4.51.2.68 PRETYPEDO

```
#define PRETYPEDO 2
```

Definition at line 149 of file [ftypes.h](#).

4.51.2.69 PRETYPEPROCEDURE

```
#define PRETYPEPROCEDURE 3
```

Definition at line 150 of file [ftypes.h](#).

4.51.2.70 PRETYPESWITCH

```
#define PRETYPESWITCH 4
```

Definition at line 151 of file [ftypes.h](#).

4.51.2.71 PRETYPEINSIDE

```
#define PRETYPEINSIDE 5
```

Definition at line 152 of file [ftypes.h](#).

4.51.2.72 DECLARATION

```
#define DECLARATION 1
```

Definition at line 158 of file [ftypes.h](#).

4.51.2.73 SPECIFICATION

```
#define SPECIFICATION 2
```

Definition at line 159 of file [ftypes.h](#).

4.51.2.74 DEFINITION

```
#define DEFINITION 3
```

Definition at line 160 of file [ftypes.h](#).

4.51.2.75 STATEMENT

```
#define STATEMENT 4
```

Definition at line 161 of file [ftypes.h](#).

4.51.2.76 TOOOUTPUT

```
#define TOOOUTPUT 5
```

Definition at line 162 of file [ftypes.h](#).

4.51.2.77 ATENDOFMODULE

```
#define ATENDOFMODULE 6
```

Definition at line 163 of file [ftypes.h](#).

4.51.2.78 MIXED2

```
#define MIXED2 8
```

Definition at line 164 of file [ftypes.h](#).

4.51.2.79 MIXED

```
#define MIXED 9
```

Definition at line 165 of file [ftypes.h](#).

4.51.2.80 NOAUTO

```
#define NOAUTO 0
```

Definition at line 191 of file [ftypes.h](#).

4.51.2.81 PARTEST

```
#define PARTEST 1
```

Definition at line 192 of file [ftypes.h](#).

4.51.2.82 WITHAUTO

```
#define WITHAUTO 2
```

Definition at line 193 of file [ftypes.h](#).

4.51.2.83 ALLVARIABLES

```
#define ALLVARIABLES -1
```

Definition at line 195 of file [ftypes.h](#).

4.51.2.84 SYMBOLONLY

```
#define SYMBOLONLY 1
```

Definition at line 196 of file [ftypes.h](#).

4.51.2.85 INDEXONLY

```
#define INDEXONLY 2
```

Definition at line 197 of file [ftypes.h](#).

4.51.2.86 VECTORONLY

```
#define VECTORONLY 4
```

Definition at line 198 of file [ftypes.h](#).

4.51.2.87 FUNCTIONONLY

```
#define FUNCTIONONLY 8
```

Definition at line 199 of file [ftypes.h](#).

4.51.2.88 SETONLY

```
#define SETONLY 16
```

Definition at line 200 of file [ftypes.h](#).

4.51.2.89 EXPRESSIONONLY

```
#define EXPRESSIONONLY 32
```

Definition at line 201 of file [ftypes.h](#).

4.51.2.90 CDELETE

```
#define CDELETE -1
```

Definition at line 212 of file [ftypes.h](#).

4.51.2.91 ANYTYPE

```
#define ANYTYPE -1
```

Definition at line 213 of file [ftypes.h](#).

4.51.2.92 CSYMBOL

```
#define CSYMBOL 0
```

Definition at line 214 of file [ftypes.h](#).

4.51.2.93 CINDEX

```
#define CINDEX 1
```

Definition at line 215 of file [ftypes.h](#).

4.51.2.94 CVECTOR

```
#define CVECTOR 2
```

Definition at line 216 of file [ftypes.h](#).

4.51.2.95 CFUNCTION

```
#define CFUNCTION 3
```

Definition at line 217 of file [ftypes.h](#).

4.51.2.96 CSET

```
#define CSET 4
```

Definition at line 218 of file [ftypes.h](#).

4.51.2.97 CEXPRESSION

```
#define CEXPRESSION 5
```

Definition at line 219 of file [ftypes.h](#).

4.51.2.98 CDOTPRODUCT

```
#define CDOTPRODUCT 6
```

Definition at line 220 of file [ftypes.h](#).

4.51.2.99 CNUMBER

```
#define CNUMBER 7
```

Definition at line 221 of file [ftypes.h](#).

4.51.2.100 CSUBEXP

```
#define CSUBEXP 8
```

Definition at line 222 of file [ftypes.h](#).

4.51.2.101 CDELTA

```
#define CDELTA 9
```

Definition at line 223 of file [ftypes.h](#).

4.51.2.102 CDOLLAR

```
#define CDOLLAR 10
```

Definition at line 224 of file [ftypes.h](#).

4.51.2.103 CDUBIOUS

```
#define CDUBIOUS 11
```

Definition at line 225 of file [ftypes.h](#).

4.51.2.104 CRANGE

```
#define CRANGE 12
```

Definition at line 226 of file [ftypes.h](#).

4.51.2.105 CMODEL

```
#define CMODEL 13
```

Definition at line 227 of file [ftypes.h](#).

4.51.2.106 CVECTOR1

```
#define CVECTOR1 21
```

Definition at line 228 of file [ftypes.h](#).

4.51.2.107 CDOUBLEDOT

```
#define CDOUBLEDOT 22
```

Definition at line 229 of file [ftypes.h](#).

4.51.2.108 TSYMBOL

```
#define TSYMBOL -1
```

Definition at line 237 of file [ftypes.h](#).

4.51.2.109 TINDEX

```
#define TINDEX -2
```

Definition at line 238 of file [ftypes.h](#).

4.51.2.110 TVECTOR

```
#define TVECTOR -3
```

Definition at line 239 of file [ftypes.h](#).

4.51.2.111 TFUNCTION

```
#define TFUNCTION -4
```

Definition at line 240 of file [ftypes.h](#).

4.51.2.112 TSET

```
#define TSET -5
```

Definition at line 241 of file [ftypes.h](#).

4.51.2.113 TEXPRESSON

```
#define TEXPRESSON -6
```

Definition at line 242 of file [ftypes.h](#).

4.51.2.114 TDOTPRODUCT

```
#define TDOTPRODUCT -7
```

Definition at line 243 of file [ftypes.h](#).

4.51.2.115 TNUMBER

```
#define TNUMBER -8
```

Definition at line 244 of file [ftypes.h](#).

4.51.2.116 TSUBEXP

```
#define TSUBEXP -9
```

Definition at line 245 of file [ftypes.h](#).

4.51.2.117 TDELTA

```
#define TDELTA -10
```

Definition at line 246 of file [ftypes.h](#).

4.51.2.118 TDOLLAR

```
#define TDOLLAR -11
```

Definition at line 247 of file [ftypes.h](#).

4.51.2.119 TDUBIOUS

```
#define TDUBIOUS -12
```

Definition at line 248 of file [ftypes.h](#).

4.51.2.120 LPARENTHESIS

```
#define LPARENTHESIS -13
```

Definition at line 249 of file [ftypes.h](#).

4.51.2.121 RPARENTHESIS

```
#define RPARENTHESIS -14
```

Definition at line 250 of file [ftypes.h](#).

4.51.2.122 TWILDCARD

```
#define TWILDCARD -15
```

Definition at line 251 of file [ftypes.h](#).

4.51.2.123 TWILDARG

```
#define TWILDARG -16
```

Definition at line 252 of file [ftypes.h](#).

4.51.2.124 TDOT

```
#define TDOT -17
```

Definition at line 253 of file [ftypes.h](#).

4.51.2.125 LBRACE

```
#define LBRACE -18
```

Definition at line 254 of file [ftypes.h](#).

4.51.2.126 RBRACE

```
#define RBRACE -19
```

Definition at line 255 of file [ftypes.h](#).

4.51.2.127 TCOMMA

```
#define TCOMMA -20
```

Definition at line 256 of file [ftypes.h](#).

4.51.2.128 TFUNOPEN

```
#define TFUNOPEN -21
```

Definition at line 257 of file [ftypes.h](#).

4.51.2.129 TFUNCLOSE

```
#define TFUNCLOSE -22
```

Definition at line 258 of file [ftypes.h](#).

4.51.2.130 TMULTIPLY

```
#define TMULTIPLY -23
```

Definition at line 259 of file [ftypes.h](#).

4.51.2.131 TDIVIDE

```
#define TDIVIDE -24
```

Definition at line 260 of file [ftypes.h](#).

4.51.2.132 TPOWER

```
#define TPOWER -25
```

Definition at line 261 of file [ftypes.h](#).

4.51.2.133 TPLUS

```
#define TPLUS -26
```

Definition at line 262 of file [ftypes.h](#).

4.51.2.134 TMINUS

```
#define TMINUS -27
```

Definition at line 263 of file [ftypes.h](#).

4.51.2.135 TNOT

```
#define TNOT -28
```

Definition at line 264 of file [ftypes.h](#).

4.51.2.136 TENDOFIT

```
#define TENDOFIT -29
```

Definition at line 265 of file [ftypes.h](#).

4.51.2.137 TSETOPEN

```
#define TSETOPEN -30
```

Definition at line 266 of file [ftypes.h](#).

4.51.2.138 TSETCLOSE

```
#define TSETCLOSE -31
```

Definition at line 267 of file [ftypes.h](#).

4.51.2.139 TGENINDEX

```
#define TGENINDEX -32
```

Definition at line 268 of file [ftypes.h](#).

4.51.2.140 TCONJUGATE

```
#define TCONJUGATE -33
```

Definition at line 269 of file [ftypes.h](#).

4.51.2.141 LRPARENTHESSES

```
#define LRPARENTHESSES -34
```

Definition at line 270 of file [ftypes.h](#).

4.51.2.142 TNUMBER1

```
#define TNUMBER1 -35
```

Definition at line 271 of file [ftypes.h](#).

4.51.2.143 TPOWER1

```
#define TPOWER1 -36
```

Definition at line 272 of file [ftypes.h](#).

4.51.2.144 EMPTY

```
#define EMPTY -37
```

Definition at line 273 of file [ftypes.h](#).

4.51.2.145 TSETNUM

```
#define TSETNUM -38
```

Definition at line 274 of file [ftypes.h](#).

4.51.2.146 TSGAMMA

```
#define TSGAMMA -39
```

Definition at line 275 of file [ftypes.h](#).

4.51.2.147 TSETDOL

```
#define TSETDOL -40
```

Definition at line 276 of file [ftypes.h](#).

4.51.2.148 TFLOAT

```
#define TFLOAT -41
```

Definition at line 277 of file [ftypes.h](#).

4.51.2.149 TYPEISFUN

```
#define TYPEISFUN 0
```

Definition at line 279 of file [ftypes.h](#).

4.51.2.150 TYPEISSUB

```
#define TYPEISSUB 1
```

Definition at line 280 of file [ftypes.h](#).

4.51.2.151 TYPEISMYSTERY

```
#define TYPEISMYSTERY -1
```

Definition at line 281 of file [ftypes.h](#).

4.51.2.152 LHSIDEX

```
#define LHSIDEX 2
```

Definition at line 283 of file [ftypes.h](#).

4.51.2.153 LHSIDE

```
#define LHSIDE 1
```

Definition at line 284 of file [ftypes.h](#).

4.51.2.154 RHSIDE

```
#define RHSIDE 0
```

Definition at line 285 of file [ftypes.h](#).

4.51.2.155 FORTRANMODE

```
#define FORTRANMODE 1
```

Definition at line 291 of file [ftypes.h](#).

4.51.2.156 REDUCEMODE

```
#define REDUCEMODE 2
```

Definition at line 292 of file [ftypes.h](#).

4.51.2.157 MAPLEMODE

```
#define MAPLEMODE 3
```

Definition at line 293 of file [ftypes.h](#).

4.51.2.158 MATHEMATICAMODE

```
#define MATHEMATICAMODE 4
```

Definition at line 294 of file [ftypes.h](#).

4.51.2.159 CMODE

```
#define CMODE 5
```

Definition at line 295 of file [ftypes.h](#).

4.51.2.160 VORTRANMODE

```
#define VORTRANMODE 6
```

Definition at line 296 of file [ftypes.h](#).

4.51.2.161 PFORTRANMODE

```
#define PFORTRANMODE 7
```

Definition at line 297 of file [ftypes.h](#).

4.51.2.162 DOUBLEFORTRANMODE

```
#define DOUBLEFORTRANMODE 33
```

Definition at line 298 of file [ftypes.h](#).

4.51.2.163 DOUBLEPRECISIONFLAG

```
#define DOUBLEPRECISIONFLAG 32
```

Definition at line 299 of file [ftypes.h](#).

4.51.2.164 NODOUBLEMASK

```
#define NODOUBLEMASK 31
```

Definition at line 300 of file [ftypes.h](#).

4.51.2.165 QUADRUPLEFORTRANMODE

```
#define QUADRUPLEFORTRANMODE 65
```

Definition at line 301 of file [ftypes.h](#).

4.51.2.166 QUADRUPLEPRECISIONFLAG

```
#define QUADRUPLEPRECISIONFLAG 64
```

Definition at line 302 of file [ftypes.h](#).

4.51.2.167 ALLINTEGERDOUBLE

```
#define ALLINTEGERDOUBLE 128
```

Definition at line 303 of file [ftypes.h](#).

4.51.2.168 NOQUADMASK

```
#define NOQUADMASK 63
```

Definition at line 304 of file [ftypes.h](#).

4.51.2.169 NORMALFORMAT

```
#define NORMALFORMAT 0
```

Definition at line 305 of file [ftypes.h](#).

4.51.2.170 NOSPACEFORMAT

```
#define NOSPACEFORMAT 1
```

Definition at line 306 of file [ftypes.h](#).

4.51.2.171 ISNOTFORTRAN90

```
#define ISNOTFORTRAN90 0
```

Definition at line 308 of file [ftypes.h](#).

4.51.2.172 ISFORTRAN90

```
#define ISFORTRAN90 1
```

Definition at line 309 of file [ftypes.h](#).

4.51.2.173 ALSOREVERSE

```
#define ALSOREVERSE 1
```

Definition at line 311 of file [ftypes.h](#).

4.51.2.174 CHISHOLM

```
#define CHISHOLM 2
```

Definition at line 312 of file [ftypes.h](#).

4.51.2.175 NOTRICK

```
#define NOTRICK 16
```

Definition at line 313 of file [ftypes.h](#).

4.51.2.176 SORTLOWFIRST

```
#define SORTLOWFIRST 0
```

Definition at line 315 of file [ftypes.h](#).

4.51.2.177 SORTHIGHFIRST

```
#define SORTHIGHFIRST 1
```

Definition at line 316 of file [ftypes.h](#).

4.51.2.178 SORTPOWERFIRST

```
#define SORTPOWERFIRST 2
```

Definition at line 317 of file [ftypes.h](#).

4.51.2.179 SORTANTIPOWER

```
#define SORTANTIPOWER 3
```

Definition at line 318 of file [ftypes.h](#).

4.51.2.180 STATSSPLITMERGE

```
#define STATSSPLITMERGE 0
```

Definition at line 324 of file [ftypes.h](#).

4.51.2.181 STATSMERGETOFILE

```
#define STATSMERGETOFILE 1
```

Definition at line 325 of file [ftypes.h](#).

4.51.2.182 STATSPOSTSORT

```
#define STATSPOSTSORT 2
```

Definition at line 326 of file [ftypes.h](#).

4.51.2.183 NOCHECKLOGTYPE

```
#define NOCHECKLOGTYPE 0
```

Definition at line 329 of file [ftypes.h](#).

4.51.2.184 CHECKLOGTYPE

```
#define CHECKLOGTYPE 1
```

Definition at line 330 of file [ftypes.h](#).

4.51.2.185 NMIN4SHIFT

```
#define NMIN4SHIFT 4
```

Definition at line 332 of file [ftypes.h](#).

4.51.2.186 SYMBOL

```
#define SYMBOL 1
```

Definition at line 346 of file [ftypes.h](#).

4.51.2.187 DOTPRODUCT

```
#define DOTPRODUCT 2
```

Definition at line 347 of file [ftypes.h](#).

4.51.2.188 VECTOR

```
#define VECTOR 3
```

Definition at line 348 of file [ftypes.h](#).

4.51.2.189 INDEX

```
#define INDEX 4
```

Definition at line 349 of file [ftypes.h](#).

4.51.2.190 EXPRESSION

```
#define EXPRESSION 5
```

Definition at line 350 of file [ftypes.h](#).

4.51.2.191 SUBEXPRESSION

```
#define SUBEXPRESSION 6
```

Definition at line 351 of file [ftypes.h](#).

4.51.2.192 DOLLAREXPRESSION

```
#define DOLLAREXPRESSION 7
```

Definition at line 352 of file [ftypes.h](#).

4.51.2.193 SETSET

```
#define SETSET 8
```

Definition at line 353 of file [ftypes.h](#).

4.51.2.194 ARGWILD

```
#define ARGWILD 9
```

Definition at line 354 of file [ftypes.h](#).

4.51.2.195 MINVECTOR

```
#define MINVECTOR 10
```

Definition at line 355 of file [ftypes.h](#).

4.51.2.196 SETEXP

```
#define SETEXP 11
```

Definition at line 356 of file [ftypes.h](#).

4.51.2.197 DOLLAREXPR2

```
#define DOLLAREXPR2 12
```

Definition at line 357 of file [ftypes.h](#).

4.51.2.198 HAAKJE0

```
#define HAAKJE0 9
```

Definition at line 358 of file [ftypes.h](#).

4.51.2.199 FUNCTION

```
#define FUNCTION 20
```

Definition at line 359 of file [ftypes.h](#).

4.51.2.200 TMPPOLYFUN

```
#define TMPPOLYFUN 14
```

Definition at line 361 of file [ftypes.h](#).

4.51.2.201 ARGFIELD

```
#define ARGFIELD 15
```

Definition at line 362 of file [ftypes.h](#).

4.51.2.202 SNUMBER

```
#define SNUMBER 16
```

Definition at line 363 of file [ftypes.h](#).

4.51.2.203 LNUMBER

```
#define LNUMBER 17
```

Definition at line 364 of file [ftypes.h](#).

4.51.2.204 HAAKJE

```
#define HAAKJE 18
```

Definition at line 365 of file [ftypes.h](#).

4.51.2.205 DELTA

```
#define DELTA 19
```

Definition at line 366 of file [ftypes.h](#).

4.51.2.206 EXPONENT

```
#define EXPONENT 20
```

Definition at line 367 of file [ftypes.h](#).

4.51.2.207 DENOMINATOR

```
#define DENOMINATOR 21
```

Definition at line 368 of file [ftypes.h](#).

4.51.2.208 SETFUNCTION

```
#define SETFUNCTION 22
```

Definition at line 369 of file [ftypes.h](#).

4.51.2.209 GAMMA

```
#define GAMMA 23
```

Definition at line 370 of file [ftypes.h](#).

4.51.2.210 GAMMAI

```
#define GAMMAI 24
```

Definition at line 371 of file [ftypes.h](#).

4.51.2.211 GAMMAFIVE

```
#define GAMMAFIVE 25
```

Definition at line 372 of file [ftypes.h](#).

4.51.2.212 GAMMASIX

```
#define GAMMASIX 26
```

Definition at line 373 of file [ftypes.h](#).

4.51.2.213 GAMMASEVEN

```
#define GAMMASEVEN 27
```

Definition at line 374 of file [ftypes.h](#).

4.51.2.214 SUMF1

```
#define SUMF1 28
```

Definition at line 375 of file [ftypes.h](#).

4.51.2.215 SUMF2

```
#define SUMF2 29
```

Definition at line 376 of file [ftypes.h](#).

4.51.2.216 DUMFUN

```
#define DUMFUN 30
```

Definition at line 377 of file [ftypes.h](#).

4.51.2.217 REPLACEMENT

```
#define REPLACEMENT 31
```

Definition at line 378 of file [ftypes.h](#).

4.51.2.218 REVERSEFUNCTION

```
#define REVERSEFUNCTION 32
```

Definition at line 379 of file [ftypes.h](#).

4.51.2.219 DISTRIBUTION

```
#define DISTRIBUTION 33
```

Definition at line 380 of file [ftypes.h](#).

4.51.2.220 DELTA3

```
#define DELTA3 34
```

Definition at line 381 of file [ftypes.h](#).

4.51.2.221 DUMMYFUN

```
#define DUMMYFUN 35
```

Definition at line 382 of file [ftypes.h](#).

4.51.2.222 DUMMYTEN

```
#define DUMMYTEN 36
```

Definition at line 383 of file [ftypes.h](#).

4.51.2.223 LEVICIVITA

```
#define LEVICIVITA 37
```

Definition at line 384 of file [ftypes.h](#).

4.51.2.224 FACTORIAL

```
#define FACTORIAL 38
```

Definition at line 385 of file [ftypes.h](#).

4.51.2.225 INVERSEFACTORIAL

```
#define INVERSEFACTORIAL 39
```

Definition at line 386 of file [ftypes.h](#).

4.51.2.226 BINOMIAL

```
#define BINOMIAL 40
```

Definition at line 387 of file [ftypes.h](#).

4.51.2.227 NUMARGSFUN

```
#define NUMARGSFUN 41
```

Definition at line 388 of file [ftypes.h](#).

4.51.2.228 SIGNFUN

```
#define SIGNFUN 42
```

Definition at line 389 of file [ftypes.h](#).

4.51.2.229 MODFUNCTION

```
#define MODFUNCTION 43
```

Definition at line 390 of file [ftypes.h](#).

4.51.2.230 MOD2FUNCTION

```
#define MOD2FUNCTION 44
```

Definition at line 391 of file [ftypes.h](#).

4.51.2.231 MINFUNCTION

```
#define MINFUNCTION 45
```

Definition at line 392 of file [ftypes.h](#).

4.51.2.232 MAXFUNCTION

```
#define MAXFUNCTION 46
```

Definition at line 393 of file [ftypes.h](#).

4.51.2.233 ABSFUNCTION

```
#define ABSFUNCTION 47
```

Definition at line 394 of file [ftypes.h](#).

4.51.2.234 SIGFUNCTION

```
#define SIGFUNCTION 48
```

Definition at line 395 of file [ftypes.h](#).

4.51.2.235 INTFUNCTION

```
#define INTFUNCTION 49
```

Definition at line 396 of file [ftypes.h](#).

4.51.2.236 THETA

```
#define THETA 50
```

Definition at line 397 of file [ftypes.h](#).

4.51.2.237 THETA2

```
#define THETA2 51
```

Definition at line 398 of file [ftypes.h](#).

4.51.2.238 DELTA2

```
#define DELTA2 52
```

Definition at line 399 of file [ftypes.h](#).

4.51.2.239 DELTAP

```
#define DELTAP 53
```

Definition at line 400 of file [ftypes.h](#).

4.51.2.240 BERNOULLIFUNCTION

```
#define BERNOULLIFUNCTION 54
```

Definition at line 401 of file [ftypes.h](#).

4.51.2.241 COUNTFUNCTION

```
#define COUNTFUNCTION 55
```

Definition at line 402 of file [ftypes.h](#).

4.51.2.242 MATCHFUNCTION

```
#define MATCHFUNCTION 56
```

Definition at line 403 of file [ftypes.h](#).

4.51.2.243 PATTERNFUNCTION

```
#define PATTERNFUNCTION 57
```

Definition at line 404 of file [ftypes.h](#).

4.51.2.244 TERMFUNCTION

```
#define TERMFUNCTION 58
```

Definition at line 405 of file [ftypes.h](#).

4.51.2.245 CONJUGATION

```
#define CONJUGATION 59
```

Definition at line 406 of file [ftypes.h](#).

4.51.2.246 ROOTFUNCTION

```
#define ROOTFUNCTION 60
```

Definition at line 407 of file [ftypes.h](#).

4.51.2.247 TABLEFUNCTION

```
#define TABLEFUNCTION 61
```

Definition at line 408 of file [ftypes.h](#).

4.51.2.248 FIRSTBRACKET

```
#define FIRSTBRACKET 62
```

Definition at line 409 of file [ftypes.h](#).

4.51.2.249 TERMSINEXPR

```
#define TERMSINEXPR 63
```

Definition at line 410 of file [ftypes.h](#).

4.51.2.250 NUMTERMSFUN

```
#define NUMTERMSFUN 64
```

Definition at line 411 of file [ftypes.h](#).

4.51.2.251 GCDFUNCTION

```
#define GCDFUNCTION 65
```

Definition at line 412 of file [ftypes.h](#).

4.51.2.252 DIVFUNCTION

```
#define DIVFUNCTION 66
```

Definition at line 413 of file [ftypes.h](#).

4.51.2.253 REMFUNCTION

```
#define REMFUNCTION 67
```

Definition at line 414 of file [ftypes.h](#).

4.51.2.254 MAXPOWEROF

```
#define MAXPOWEROF 68
```

Definition at line 415 of file [ftypes.h](#).

4.51.2.255 MINPOWEROF

```
#define MINPOWEROF 69
```

Definition at line 416 of file [ftypes.h](#).

4.51.2.256 TABLESTUB

```
#define TABLESTUB 70
```

Definition at line 417 of file [ftypes.h](#).

4.51.2.257 FACTORIN

```
#define FACTORIN 71
```

Definition at line 418 of file [ftypes.h](#).

4.51.2.258 TERMSINBRACKET

```
#define TERMSINBRACKET 72
```

Definition at line 419 of file [ftypes.h](#).

4.51.2.259 WILDARGFUN

```
#define WILDARGFUN 73
```

Definition at line 420 of file [ftypes.h](#).

4.51.2.260 SQRTFUNCTION

```
#define SQRTFUNCTION 74
```

Definition at line 428 of file [ftypes.h](#).

4.51.2.261 LNFUNCTION

```
#define LNFUNCTION 75
```

Definition at line 429 of file [ftypes.h](#).

4.51.2.262 SINFUNCTION

```
#define SINFUNCTION 76
```

Definition at line 430 of file [ftypes.h](#).

4.51.2.263 COSFUNCTION

```
#define COSFUNCTION 77
```

Definition at line 431 of file [ftypes.h](#).

4.51.2.264 TANFUNCTION

```
#define TANFUNCTION 78
```

Definition at line 432 of file [ftypes.h](#).

4.51.2.265 ASINFUNCTION

```
#define ASINFUNCTION 79
```

Definition at line 433 of file [ftypes.h](#).

4.51.2.266 ACOSFUNCTION

```
#define ACOSFUNCTION 80
```

Definition at line 434 of file [ftypes.h](#).

4.51.2.267 ATANFUNCTION

```
#define ATANFUNCTION 81
```

Definition at line 435 of file [ftypes.h](#).

4.51.2.268 ATAN2FUNCTION

```
#define ATAN2FUNCTION 82
```

Definition at line 436 of file [ftypes.h](#).

4.51.2.269 SINHFUNCTION

```
#define SINHFUNCTION 83
```

Definition at line 437 of file [ftypes.h](#).

4.51.2.270 COSHFUNCTION

```
#define COSHFUNCTION 84
```

Definition at line 438 of file [ftypes.h](#).

4.51.2.271 TANHFUNCTION

```
#define TANHFUNCTION 85
```

Definition at line 439 of file [ftypes.h](#).

4.51.2.272 ASINHFUNCTION

```
#define ASINHFUNCTION 86
```

Definition at line 440 of file [ftypes.h](#).

4.51.2.273 ACOSHFUNCTION

```
#define ACOSHFUNCTION 87
```

Definition at line 441 of file [ftypes.h](#).

4.51.2.274 ATANHFUNCTION

```
#define ATANHFUNCTION 88
```

Definition at line 442 of file [ftypes.h](#).

4.51.2.275 LI2FUNCTION

```
#define LI2FUNCTION 89
```

Definition at line 443 of file [ftypes.h](#).

4.51.2.276 LINFUNCTION

```
#define LINFUNCTION 90
```

Definition at line 444 of file [ftypes.h](#).

4.51.2.277 EXTRASYMFUN

```
#define EXTRASYMFUN 91
```

Definition at line 446 of file [ftypes.h](#).

4.51.2.278 RANDOMFUNCTION

```
#define RANDOMFUNCTION 92
```

Definition at line 447 of file [ftypes.h](#).

4.51.2.279 RANPERM

```
#define RANPERM 93
```

Definition at line 448 of file [ftypes.h](#).

4.51.2.280 NUMFACTORS

```
#define NUMFACTORS 94
```

Definition at line 449 of file [ftypes.h](#).

4.51.2.281 FIRSTTERM

```
#define FIRSTTERM 95
```

Definition at line 450 of file [ftypes.h](#).

4.51.2.282 CONTENTTERM

```
#define CONTENTTERM 96
```

Definition at line 451 of file [ftypes.h](#).

4.51.2.283 PRIMENUMBER

```
#define PRIMENUMBER 97
```

Definition at line 452 of file [ftypes.h](#).

4.51.2.284 EXTEUCLIDEAN

```
#define EXTEUCLIDEAN 98
```

Definition at line 453 of file [ftypes.h](#).

4.51.2.285 MAKERATIONAL

```
#define MAKERATIONAL 99
```

Definition at line 454 of file [ftypes.h](#).

4.51.2.286 INVERSEFUNCTION

```
#define INVERSEFUNCTION 100
```

Definition at line 455 of file [ftypes.h](#).

4.51.2.287 IDFUNCTION

```
#define IDFUNCTION 101
```

Definition at line 456 of file [ftypes.h](#).

4.51.2.288 PUTFIRST

```
#define PUTFIRST 102
```

Definition at line 457 of file [ftypes.h](#).

4.51.2.289 PERMUTATIONS

```
#define PERMUTATIONS 103
```

Definition at line 458 of file [ftypes.h](#).

4.51.2.290 PARTITIONS

```
#define PARTITIONS 104
```

Definition at line 459 of file [ftypes.h](#).

4.51.2.291 MULFUNCTION

```
#define MULFUNCTION 105
```

Definition at line 460 of file [ftypes.h](#).

4.51.2.292 MOEBIUS

```
#define MOEBIUS 106
```

Definition at line 461 of file [ftypes.h](#).

4.51.2.293 TOPOLOGIES

```
#define TOPOLOGIES 107
```

Definition at line 462 of file [ftypes.h](#).

4.51.2.294 DIAGRAMS

```
#define DIAGRAMS 108
```

Definition at line 463 of file [ftypes.h](#).

4.51.2.295 TOPO

```
#define TOPO 109
```

Definition at line [464](#) of file [ftypes.h](#).

4.51.2.296 NODEFUNCTION

```
#define NODEFUNCTION 110
```

Definition at line [465](#) of file [ftypes.h](#).

4.51.2.297 EDGE

```
#define EDGE 111
```

Definition at line [466](#) of file [ftypes.h](#).

4.51.2.298 SIZEOFFUNCTION

```
#define SIZEOFFUNCTION 112
```

Definition at line [467](#) of file [ftypes.h](#).

4.51.2.299 BLOCK

```
#define BLOCK 113
```

Definition at line [468](#) of file [ftypes.h](#).

4.51.2.300 ONEPI

```
#define ONEPI 114
```

Definition at line [469](#) of file [ftypes.h](#).

4.51.2.301 PHI

```
#define PHI 115
```

Definition at line [470](#) of file [ftypes.h](#).

4.51.2.302 FLOATFUN

```
#define FLOATFUN 116
```

Definition at line [471](#) of file [ftypes.h](#).

4.51.2.303 TOFLOAT

```
#define TOFLOAT 117
```

Definition at line 472 of file [ftypes.h](#).

4.51.2.304 TORAT

```
#define TORAT 118
```

Definition at line 473 of file [ftypes.h](#).

4.51.2.305 MZV

```
#define MZV 119
```

Definition at line 474 of file [ftypes.h](#).

4.51.2.306 EULER

```
#define EULER 120
```

Definition at line 475 of file [ftypes.h](#).

4.51.2.307 MZVHALF

```
#define MZVHALF 121
```

Definition at line 476 of file [ftypes.h](#).

4.51.2.308 AGMFUNCTION

```
#define AGMFUNCTION 122
```

Definition at line 477 of file [ftypes.h](#).

4.51.2.309 GAMMAFUN

```
#define GAMMAFUN 123
```

Definition at line 478 of file [ftypes.h](#).

4.51.2.310 EXPFUNCTION

```
#define EXPFUNCTION 124
```

Definition at line 479 of file [ftypes.h](#).

4.51.2.311 HPLFUNCTION

```
#define HPLFUNCTION 125
```

Definition at line 480 of file [ftypes.h](#).

4.51.2.312 MPLFUNCTION

```
#define MPLFUNCTION 126
```

Definition at line 481 of file [ftypes.h](#).

4.51.2.313 MAXBUILTINFUNCTION

```
#define MAXBUILTINFUNCTION 126
```

Definition at line 482 of file [ftypes.h](#).

4.51.2.314 FIRSTUSERFUNCTION

```
#define FIRSTUSERFUNCTION 150
```

Definition at line 484 of file [ftypes.h](#).

4.51.2.315 ALLFUNCTIONS

```
#define ALLFUNCTIONS -1
```

Definition at line 486 of file [ftypes.h](#).

4.51.2.316 ALLMZVFUNCTIONS

```
#define ALLMZVFUNCTIONS -2
```

Definition at line 487 of file [ftypes.h](#).

4.51.2.317 ISYMBOL

```
#define ISYMBOL 0
```

Definition at line 495 of file [ftypes.h](#).

4.51.2.318 PISYMBOL

```
#define PISYMBOL 1
```

Definition at line 496 of file [ftypes.h](#).

4.51.2.319 COEFFSYMBOL

```
#define COEFFSYMBOL 2
```

Definition at line 497 of file [ftypes.h](#).

4.51.2.320 NUMERATORSYMBOL

```
#define NUMERATORSYMBOL 3
```

Definition at line 498 of file [ftypes.h](#).

4.51.2.321 DENOMINATORSYMBOL

```
#define DENOMINATORSYMBOL 4
```

Definition at line 499 of file [ftypes.h](#).

4.51.2.322 WILDARGSYMBOL

```
#define WILDARGSYMBOL 5
```

Definition at line 500 of file [ftypes.h](#).

4.51.2.323 DIMENSIONSYPOL

```
#define DIMENSIONSYPOL 6
```

Definition at line 501 of file [ftypes.h](#).

4.51.2.324 FACTORSYMBOL

```
#define FACTORSYMBOL 7
```

Definition at line 502 of file [ftypes.h](#).

4.51.2.325 SEPARATESYMBOL

```
#define SEPARATESYMBOL 8
```

Definition at line 503 of file [ftypes.h](#).

4.51.2.326 EESYMBOL

```
#define EESYMBOL 9
```

Definition at line 504 of file [ftypes.h](#).

4.51.2.327 EMSYMBOL

```
#define EMSYMBOL 10
```

Definition at line 505 of file [ftypes.h](#).

4.51.2.328 BUILTINSYMBOLS

```
#define BUILTINSYMBOLS 11
```

Definition at line 507 of file [ftypes.h](#).

4.51.2.329 FIRSTUSERSYMBOL

```
#define FIRSTUSERSYMBOL 20
```

Definition at line 508 of file [ftypes.h](#).

4.51.2.330 BUILTININDICES

```
#define BUILTININDICES 1
```

Definition at line 510 of file [ftypes.h](#).

4.51.2.331 BUILTINVECTORS

```
#define BUILTINVECTORS 1
```

Definition at line 511 of file [ftypes.h](#).

4.51.2.332 BUILTINDOLLARS

```
#define BUILTINDOLLARS 1
```

Definition at line 512 of file [ftypes.h](#).

4.51.2.333 WILDARGVECTOR

```
#define WILDARGVECTOR 0
```

Definition at line 514 of file [ftypes.h](#).

4.51.2.334 WILDARGINDEX

```
#define WILDARGINDEX 0
```

Definition at line 515 of file [ftypes.h](#).

4.51.2.335 TYPEEXPRESSION

```
#define TYPEEXPRESSION 0
```

Definition at line 526 of file [ftypes.h](#).

4.51.2.336 TYPEIDNEW

```
#define TYPEIDNEW 1
```

Definition at line 527 of file [ftypes.h](#).

4.51.2.337 TYPEIDOLD

```
#define TYPEIDOLD 2
```

Definition at line 528 of file [ftypes.h](#).

4.51.2.338 TYPEOPERATION

```
#define TYPEOPERATION 3
```

Definition at line 529 of file [ftypes.h](#).

4.51.2.339 TYPEEREPEAT

```
#define TYPEEREPEAT 4
```

Definition at line 530 of file [ftypes.h](#).

4.51.2.340 TYPEENDREPEAT

```
#define TYPEENDREPEAT 5
```

Definition at line 531 of file [ftypes.h](#).

4.51.2.341 TYPECOUNT

```
#define TYPECOUNT 20
```

Definition at line 535 of file [ftypes.h](#).

4.51.2.342 TYPEMULT

```
#define TYPEMULT 21
```

Definition at line 536 of file [ftypes.h](#).

4.51.2.343 TYPEGOTO

```
#define TYPEGOTO 22
```

Definition at line [537](#) of file [ftypes.h](#).

4.51.2.344 TYPEDISCARD

```
#define TYPEDISCARD 23
```

Definition at line [538](#) of file [ftypes.h](#).

4.51.2.345 TYPEIF

```
#define TYPEIF 24
```

Definition at line [539](#) of file [ftypes.h](#).

4.51.2.346 TYPEELSE

```
#define TYPEELSE 25
```

Definition at line [540](#) of file [ftypes.h](#).

4.51.2.347 TYPEELIF

```
#define TYPEELIF 26
```

Definition at line [541](#) of file [ftypes.h](#).

4.51.2.348 TYPEENDIF

```
#define TYPEENDIF 27
```

Definition at line [542](#) of file [ftypes.h](#).

4.51.2.349 TYPESUM

```
#define TYPESUM 28
```

Definition at line [543](#) of file [ftypes.h](#).

4.51.2.350 TYPECHISHOLM

```
#define TYPECHISHOLM 29
```

Definition at line [544](#) of file [ftypes.h](#).

4.51.2.351 TYPEPERVERSE

```
#define TYPEPERVERSE 30
```

Definition at line 545 of file [ftypes.h](#).

4.51.2.352 TYPEARG

```
#define TYPEARG 31
```

Definition at line 546 of file [ftypes.h](#).

4.51.2.353 TYPENORM

```
#define TYPENORM 32
```

Definition at line 547 of file [ftypes.h](#).

4.51.2.354 TYPENORM2

```
#define TYPENORM2 33
```

Definition at line 548 of file [ftypes.h](#).

4.51.2.355 TYPENORM3

```
#define TYPENORM3 34
```

Definition at line 549 of file [ftypes.h](#).

4.51.2.356 TYPEEXIT

```
#define TYPEEXIT 35
```

Definition at line 550 of file [ftypes.h](#).

4.51.2.357 TYPESETEXIT

```
#define TYPESETEXIT 36
```

Definition at line 551 of file [ftypes.h](#).

4.51.2.358 TYPEPRINT

```
#define TYPEPRINT 37
```

Definition at line 552 of file [ftypes.h](#).

4.51.2.359 TYPEFPRINT

```
#define TYPEFPRINT 38
```

Definition at line 553 of file [ftypes.h](#).

4.51.2.360 TYPEREDEFPRE

```
#define TYPEREDEFPRE 39
```

Definition at line 554 of file [ftypes.h](#).

4.51.2.361 TYPESPLITARG

```
#define TYPESPLITARG 40
```

Definition at line 555 of file [ftypes.h](#).

4.51.2.362 TYPESPLITARG2

```
#define TYPESPLITARG2 41
```

Definition at line 556 of file [ftypes.h](#).

4.51.2.363 TYPEFACTARG

```
#define TYPEFACTARG 42
```

Definition at line 557 of file [ftypes.h](#).

4.51.2.364 TYPEFACTARG2

```
#define TYPEFACTARG2 43
```

Definition at line 558 of file [ftypes.h](#).

4.51.2.365 TYPETRY

```
#define TYPETRY 44
```

Definition at line 559 of file [ftypes.h](#).

4.51.2.366 TYPEASSIGN

```
#define TYPEASSIGN 45
```

Definition at line 560 of file [ftypes.h](#).

4.51.2.367 TYPEENUMBER

```
#define TYPEENUMBER 46
```

Definition at line 561 of file [ftypes.h](#).

4.51.2.368 TYPESUMFIX

```
#define TYPESUMFIX 47
```

Definition at line 562 of file [ftypes.h](#).

4.51.2.369 TYPEFINDLOOP

```
#define TYPEFINDLOOP 48
```

Definition at line 563 of file [ftypes.h](#).

4.51.2.370 TYPEUNRAVEL

```
#define TYPEUNRAVEL 49
```

Definition at line 564 of file [ftypes.h](#).

4.51.2.371 TYPEADJUSTBOUNDS

```
#define TYPEADJUSTBOUNDS 50
```

Definition at line 565 of file [ftypes.h](#).

4.51.2.372 TYPEINSIDE

```
#define TYPEINSIDE 51
```

Definition at line 566 of file [ftypes.h](#).

4.51.2.373 TYPETERM

```
#define TYPETERM 52
```

Definition at line 567 of file [ftypes.h](#).

4.51.2.374 TYPESORT

```
#define TYPESORT 53
```

Definition at line 568 of file [ftypes.h](#).

4.51.2.375 TYPEDETCURDUM

```
#define TYPEDETCURDUM 54
```

Definition at line 569 of file [ftypes.h](#).

4.51.2.376 TYPEINEXPRESSION

```
#define TYPEINEXPRESSION 55
```

Definition at line 570 of file [ftypes.h](#).

4.51.2.377 TYPESPLITFIRSTARG

```
#define TYPESPLITFIRSTARG 56
```

Definition at line 571 of file [ftypes.h](#).

4.51.2.378 TYPESPLITLASTARG

```
#define TYPESPLITLASTARG 57
```

Definition at line 572 of file [ftypes.h](#).

4.51.2.379 TYPEMERGE

```
#define TYPEMERGE 58
```

Definition at line 573 of file [ftypes.h](#).

4.51.2.380 TYPETESTUSE

```
#define TYPETESTUSE 59
```

Definition at line 574 of file [ftypes.h](#).

4.51.2.381 TYPEAPPLY

```
#define TYPEAPPLY 60
```

Definition at line 575 of file [ftypes.h](#).

4.51.2.382 TYPEAPPLYRESET

```
#define TYPEAPPLYRESET 61
```

Definition at line 576 of file [ftypes.h](#).

4.51.2.383 TYPECHAININ

```
#define TYPECHAININ 62
```

Definition at line 577 of file [ftypes.h](#).

4.51.2.384 TYPECHAINOUT

```
#define TYPECHAINOUT 63
```

Definition at line 578 of file [ftypes.h](#).

4.51.2.385 TYPENORM4

```
#define TYPENORM4 64
```

Definition at line 579 of file [ftypes.h](#).

4.51.2.386 TYPEFACTOR

```
#define TYPEFACTOR 65
```

Definition at line 580 of file [ftypes.h](#).

4.51.2.387 TYPEARGIMPLODE

```
#define TYPEARGIMPLODE 66
```

Definition at line 581 of file [ftypes.h](#).

4.51.2.388 TYPEARGEXPLODE

```
#define TYPEARGEXPLODE 67
```

Definition at line 582 of file [ftypes.h](#).

4.51.2.389 TYPEDENOMINATORS

```
#define TYPEDENOMINATORS 68
```

Definition at line 583 of file [ftypes.h](#).

4.51.2.390 TYPESTUFFLE

```
#define TYPESTUFFLE 69
```

Definition at line 584 of file [ftypes.h](#).

4.51.2.391 TYPEDROPCOEFFICIENT

```
#define TYPEDROPCOEFFICIENT 70
```

Definition at line 585 of file [ftypes.h](#).

4.51.2.392 TYPETRANSFORM

```
#define TYPETRANSFORM 71
```

Definition at line 586 of file [ftypes.h](#).

4.51.2.393 TYPETOPOLYNOMIAL

```
#define TYPETOPOLYNOMIAL 72
```

Definition at line 587 of file [ftypes.h](#).

4.51.2.394 TYPEFROMPOLYNOMIAL

```
#define TYPEFROMPOLYNOMIAL 73
```

Definition at line 588 of file [ftypes.h](#).

4.51.2.395 TYPEDOLOOP

```
#define TYPEDOLOOP 74
```

Definition at line 589 of file [ftypes.h](#).

4.51.2.396 TYPEENDDOLOOP

```
#define TYPEENDDOLOOP 75
```

Definition at line 590 of file [ftypes.h](#).

4.51.2.397 TYPEDROPSYMBOLS

```
#define TYPEDROPSYMBOLS 76
```

Definition at line 591 of file [ftypes.h](#).

4.51.2.398 TYPEPUTINSIDE

```
#define TYPEPUTINSIDE 77
```

Definition at line 592 of file [ftypes.h](#).

4.51.2.399 TYPETOSPECTATOR

```
#define TYPETOSPECTATOR 78
```

Definition at line 593 of file [ftypes.h](#).

4.51.2.400 TYPEARGTOEXTRASymbol

```
#define TYPEARGTOEXTRASymbol 79
```

Definition at line 594 of file [ftypes.h](#).

4.51.2.401 TYPECANONICALIZE

```
#define TYPECANONICALIZE 80
```

Definition at line 595 of file [ftypes.h](#).

4.51.2.402 TYPESWITCH

```
#define TYPESWITCH 81
```

Definition at line 596 of file [ftypes.h](#).

4.51.2.403 TYPEENDSWITCH

```
#define TYPEENDSWITCH 82
```

Definition at line 597 of file [ftypes.h](#).

4.51.2.404 TYPESETUSERFLAG

```
#define TYPESETUSERFLAG 83
```

Definition at line 598 of file [ftypes.h](#).

4.51.2.405 TYPECLEARUSERFLAG

```
#define TYPECLEARUSERFLAG 84
```

Definition at line 599 of file [ftypes.h](#).

4.51.2.406 TYPEALLLOOPS

```
#define TYPEALLLOOPS 85
```

Definition at line 600 of file [ftypes.h](#).

4.51.2.407 TYPEALLPATHS

```
#define TYPEALLPATHS 86
```

Definition at line 601 of file [ftypes.h](#).

4.51.2.408 TAKETRACE

```
#define TAKETRACE 1
```

Definition at line 615 of file [ftypes.h](#).

4.51.2.409 CONTRACT

```
#define CONTRACT 2
```

Definition at line 616 of file [ftypes.h](#).

4.51.2.410 RATIO

```
#define RATIO 3
```

Definition at line 617 of file [ftypes.h](#).

4.51.2.411 SYMMETRIZE

```
#define SYMMETRIZE 4
```

Definition at line 618 of file [ftypes.h](#).

4.51.2.412 TENVEC

```
#define TENVEC 5
```

Definition at line 619 of file [ftypes.h](#).

4.51.2.413 SUMNUM1

```
#define SUMNUM1 6
```

Definition at line 620 of file [ftypes.h](#).

4.51.2.414 SUMNUM2

```
#define SUMNUM2 7
```

Definition at line 621 of file [ftypes.h](#).

4.51.2.415 WILDDUMMY

```
#define WILDDUMMY 0
```

Definition at line 627 of file [ftypes.h](#).

4.51.2.416 SYMTONUM

```
#define SYMTONUM 1
```

Definition at line 628 of file [ftypes.h](#).

4.51.2.417 SYMTOSYM

```
#define SYMTOSYM 2
```

Definition at line 629 of file [ftypes.h](#).

4.51.2.418 SYMTOSUB

```
#define SYMTOSUB 3
```

Definition at line 630 of file [ftypes.h](#).

4.51.2.419 VECTOMIN

```
#define VECTOMIN 4
```

Definition at line 631 of file [ftypes.h](#).

4.51.2.420 VECTOVEC

```
#define VECTOVEC 5
```

Definition at line 632 of file [ftypes.h](#).

4.51.2.421 VECTOSUB

```
#define VECTOSUB 6
```

Definition at line 633 of file [ftypes.h](#).

4.51.2.422 INDTOIND

```
#define INDTOIND 7
```

Definition at line 634 of file [ftypes.h](#).

4.51.2.423 INDTOSUB

```
#define INDTOSUB 8
```

Definition at line 635 of file [ftypes.h](#).

4.51.2.424 FUNTOFUN

```
#define FUNTOFUN 9
```

Definition at line 636 of file [ftypes.h](#).

4.51.2.425 ARGTOARG

```
#define ARGTOARG 10
```

Definition at line 637 of file [ftypes.h](#).

4.51.2.426 ARLTOARL

```
#define ARLTOARL 11
```

Definition at line 638 of file [ftypes.h](#).

4.51.2.427 EXPTOEXP

```
#define EXPTOEXP 12
```

Definition at line 639 of file [ftypes.h](#).

4.51.2.428 FROMBRAC

```
#define FROMBRAC 13
```

Definition at line 640 of file [ftypes.h](#).

4.51.2.429 FROMSET

```
#define FROMSET 14
```

Definition at line 641 of file [ftypes.h](#).

4.51.2.430 SETTONUM

```
#define SETTONUM 15
```

Definition at line 642 of file [ftypes.h](#).

4.51.2.431 WILDCARDS

```
#define WILDCARDS 16
```

Definition at line 643 of file [ftypes.h](#).

4.51.2.432 SETNUMBER

```
#define SETNUMBER 17
```

Definition at line 644 of file [ftypes.h](#).

4.51.2.433 LOADDOLLAR

```
#define LOADDOLLAR 18
```

Definition at line 645 of file [ftypes.h](#).

4.51.2.434 NUMTONUM

```
#define NUMTONUM 20
```

Definition at line 649 of file [ftypes.h](#).

4.51.2.435 NUMTOSYM

```
#define NUMTOSYM 21
```

Definition at line 650 of file [ftypes.h](#).

4.51.2.436 NUMTOIND

```
#define NUMTOIND 22
```

Definition at line 651 of file [ftypes.h](#).

4.51.2.437 NUMTOSUB

```
#define NUMTOSUB 23
```

Definition at line 652 of file [ftypes.h](#).

4.51.2.438 EATTENSOR

```
#define EATTENSOR 0x2000
```

Definition at line 656 of file [ftypes.h](#).

4.51.2.439 CLEANFLAG

```
#define CLEANFLAG 0
```

Definition at line 662 of file [ftypes.h](#).

4.51.2.440 DIRTYFLAG

```
#define DIRTYFLAG 1
```

Definition at line 663 of file [ftypes.h](#).

4.51.2.441 DIRTSYMFLAG

```
#define DIRTSYMFLAG 2
```

Definition at line 664 of file [ftypes.h](#).

4.51.2.442 MUSTCLEANPRF

```
#define MUSTCLEANPRF 4
```

Definition at line 665 of file [ftypes.h](#).

4.51.2.443 SUBTERMUSED1

```
#define SUBTERMUSED1 8
```

Definition at line 666 of file [ftypes.h](#).

4.51.2.444 SUBTERMUSED2

```
#define SUBTERMUSED2 16
```

Definition at line 667 of file [ftypes.h](#).

4.51.2.445 ALLDIRTY

```
#define ALLDIRTY (DIRTYFLAG|DIRTSYMFLAG)
```

Definition at line 668 of file [ftypes.h](#).

4.51.2.446 ARGHEAD

```
#define ARGHEAD 2
```

Definition at line 670 of file [ftypes.h](#).

4.51.2.447 FUNHEAD

```
#define FUNHEAD 3
```

Definition at line 671 of file [ftypes.h](#).

4.51.2.448 SUBEXPSIZE

```
#define SUBEXPSIZE 5
```

Definition at line 672 of file [ftypes.h](#).

4.51.2.449 EXPRHEAD

```
#define EXPRHEAD 5
```

Definition at line 673 of file [ftypes.h](#).

4.51.2.450 TYPEARGHEADSIZE

```
#define TYPEARGHEADSIZE 6
```

Definition at line 674 of file [ftypes.h](#).

4.51.2.451 SKIP

```
#define SKIP 1
```

Definition at line 681 of file [ftypes.h](#).

4.51.2.452 DROP

```
#define DROP 2
```

Definition at line 682 of file [ftypes.h](#).

4.51.2.453 HIDE

```
#define HIDE 3
```

Definition at line 683 of file [ftypes.h](#).

4.51.2.454 UNHIDE

```
#define UNHIDE 4
```

Definition at line 684 of file [ftypes.h](#).

4.51.2.455 INTOHIDE

```
#define INTOHIDE 5
```

Definition at line 685 of file [ftypes.h](#).

4.51.2.456 LOCALEXPRESSION

```
#define LOCALEXPRESSION 0
```

Definition at line 691 of file [ftypes.h](#).

4.51.2.457 SKIPLEXPRESSION

```
#define SKIPLEXPRESSION 1
```

Definition at line 692 of file [ftypes.h](#).

4.51.2.458 DROPLEXPRESSION

```
#define DROPLEXPRESSION 2
```

Definition at line 693 of file [ftypes.h](#).

4.51.2.459 DROPPDEXPRESSION

```
#define DROPPDEXPRESSION 3
```

Definition at line 694 of file [ftypes.h](#).

4.51.2.460 GLOBALEXPRESSION

```
#define GLOBALEXPRESSION 4
```

Definition at line 695 of file [ftypes.h](#).

4.51.2.461 SKIPGEXPRESSION

```
#define SKIPGEXPRESSION 5
```

Definition at line 696 of file [ftypes.h](#).

4.51.2.462 DROPGEXPRESSION

```
#define DROPGEXPRESSION 6
```

Definition at line 697 of file [ftypes.h](#).

4.51.2.463 STOREDEXPRESSION

```
#define STOREDEXPRESSION 8
```

Definition at line 698 of file [ftypes.h](#).

4.51.2.464 HIDDENLEXPRESSION

```
#define HIDDENLEXPRESSION 9
```

Definition at line 699 of file [ftypes.h](#).

4.51.2.465 HIDDENGEXPRESSION

```
#define HIDDENGEXPRESSION 13
```

Definition at line 700 of file [ftypes.h](#).

4.51.2.466 INCEXPRESSION

```
#define INCEXPRESSION 9
```

Definition at line 701 of file [ftypes.h](#).

4.51.2.467 HIDELEXPRESSION

```
#define HIDELEXPRESSION 10
```

Definition at line 702 of file [ftypes.h](#).

4.51.2.468 HIDEGEXPRESSION

```
#define HIDEGEXPRESSION 14
```

Definition at line 703 of file [ftypes.h](#).

4.51.2.469 DROPHLEXPRESSION

```
#define DROPHLEXPRESSION 11
```

Definition at line 704 of file [ftypes.h](#).

4.51.2.470 DROPHGEXPRESSION

```
#define DROPHGEXPRESSION 15
```

Definition at line 705 of file [ftypes.h](#).

4.51.2.471 UNHIDELEXPRESSION

```
#define UNHIDELEXPRESSION 12
```

Definition at line 706 of file [ftypes.h](#).

4.51.2.472 UNHIDEGEXPRESSION

```
#define UNHIDEGEXPRESSION 16
```

Definition at line 707 of file [ftypes.h](#).

4.51.2.473 INTOHIDELEXPRESSION

```
#define INTOHIDELEXPRESSION 17
```

Definition at line 708 of file [ftypes.h](#).

4.51.2.474 INTOHIDEGEXPRESSION

```
#define INTOHIDEGEXPRESSION 18
```

Definition at line 709 of file [ftypes.h](#).

4.51.2.475 SPECTATOREXPRESSION

```
#define SPECTATOREXPRESSION 19
```

Definition at line 710 of file [ftypes.h](#).

4.51.2.476 DROPSPECTATOREXPRESSION

```
#define DROPSPECTATOREXPRESSION 20
```

Definition at line 711 of file [ftypes.h](#).

4.51.2.477 SKIPUNHIDELEXPRESSION

```
#define SKIPUNHIDELEXPRESSION 21
```

Definition at line 712 of file [ftypes.h](#).

4.51.2.478 SKIPUNHIDEGEXPRESSION

```
#define SKIPUNHIDEGEXPRESSION 22
```

Definition at line 713 of file [ftypes.h](#).

4.51.2.479 PRINTOFF

```
#define PRINTOFF 0
```

Definition at line 715 of file [ftypes.h](#).

4.51.2.480 PRINTON

```
#define PRINTON 1
```

Definition at line 716 of file [ftypes.h](#).

4.51.2.481 PRINTCONTENTS

```
#define PRINTCONTENTS 2
```

Definition at line 717 of file [ftypes.h](#).

4.51.2.482 PRINTCONTENT

```
#define PRINTCONTENT 3
```

Definition at line 718 of file [ftypes.h](#).

4.51.2.483 PRINTLFILE

```
#define PRINTLFILE 4
```

Definition at line 719 of file [ftypes.h](#).

4.51.2.484 PRINTONETERM

```
#define PRINTONETERM 8
```

Definition at line 720 of file [ftypes.h](#).

4.51.2.485 PRINTONEFUNCTION

```
#define PRINTONEFUNCTION 16
```

Definition at line 721 of file [ftypes.h](#).

4.51.2.486 PRINTALL

```
#define PRINTALL 32
```

Definition at line 722 of file [ftypes.h](#).

4.51.2.487 REGULAREXPRESSION

```
#define REGULAREXPRESSION -1
```

Definition at line 728 of file [ftypes.h](#).

4.51.2.488 REDEFINEDEXPRESSION

```
#define REDEFINEDEXPRESSION -2
```

Definition at line 729 of file [ftypes.h](#).

4.51.2.489 NEWLYDEFINEDEXPRESSION

```
#define NEWLYDEFINEDEXPRESSION -3
```

Definition at line 730 of file [ftypes.h](#).

4.51.2.490 VERTEXFUNCTION

```
#define VERTEXFUNCTION -1
```

Definition at line 739 of file [ftypes.h](#).

4.51.2.491 GENERALFUNCTION

```
#define GENERALFUNCTION 0
```

Definition at line 740 of file [ftypes.h](#).

4.51.2.492 TENSORFUNCTION

```
#define TENSORFUNCTION 2
```

Definition at line 741 of file [ftypes.h](#).

4.51.2.493 GAMMAFUNCTION

```
#define GAMMAFUNCTION 4
```

Definition at line 742 of file [ftypes.h](#).

4.51.2.494 POS_

```
#define POS_ 0 /* integer > 0 */
```

Definition at line 749 of file [ftypes.h](#).

4.51.2.495 POS0_

```
#define POS0_ 1 /* integer >= 0 */
```

Definition at line 750 of file [ftypes.h](#).

4.51.2.496 NEG_

```
#define NEG_ 2 /* integer < 0 */
```

Definition at line 751 of file [ftypes.h](#).

4.51.2.497 NEG0_

```
#define NEG0_ 3 /* integer <= 0 */
```

Definition at line 752 of file [ftypes.h](#).

4.51.2.498 EVEN_

```
#define EVEN_ 4 /* integer (even) */
```

Definition at line 753 of file [ftypes.h](#).

4.51.2.499 ODD_

```
#define ODD_ 5 /* integer (odd) */
```

Definition at line 754 of file [ftypes.h](#).

4.51.2.500 Z_

```
#define Z_ 6 /* integer */
```

Definition at line 755 of file [ftypes.h](#).

4.51.2.501 SYMBOL_

```
#define SYMBOL_ 7 /* symbol only */
```

Definition at line 756 of file [ftypes.h](#).

4.51.2.502 FIXED_

```
#define FIXED_ 8 /* fixed index */
```

Definition at line 757 of file [ftypes.h](#).

4.51.2.503 INDEX_

```
#define INDEX_ 9 /* index only */
```

Definition at line 758 of file [ftypes.h](#).

4.51.2.504 Q_

```
#define Q_ 10 /* rational */
```

Definition at line 759 of file [ftypes.h](#).

4.51.2.505 DUMMYINDEX_

```
#define DUMMYINDEX_ 11 /* dummy index only */
```

Definition at line 760 of file [ftypes.h](#).

4.51.2.506 VECTOR_

```
#define VECTOR_ 12 /* vector only */
```

Definition at line 761 of file [ftypes.h](#).

4.51.2.507 GAMMA1

```
#define GAMMA1 0
```

Definition at line 767 of file [ftypes.h](#).

4.51.2.508 GAMMA5

```
#define GAMMA5 -1
```

Definition at line 768 of file [ftypes.h](#).

4.51.2.509 GAMMA6

```
#define GAMMA6 -2
```

Definition at line 769 of file [ftypes.h](#).

4.51.2.510 GAMMA7

```
#define GAMMA7 -3
```

Definition at line 770 of file [ftypes.h](#).

4.51.2.511 FUNNYVEC

```
#define FUNNYVEC -4
```

Definition at line 771 of file [ftypes.h](#).

4.51.2.512 FUNNYWILD

```
#define FUNNYWILD -5
```

Definition at line 772 of file [ftypes.h](#).

4.51.2.513 SUMMEDIND

```
#define SUMMEDIND -6
```

Definition at line 773 of file [ftypes.h](#).

4.51.2.514 NOINDEX

```
#define NOINDEX -7
```

Definition at line 774 of file [ftypes.h](#).

4.51.2.515 FUNNYDOLLAR

```
#define FUNNYDOLLAR -8
```

Definition at line 775 of file [ftypes.h](#).

4.51.2.516 EMPTYINDEX

```
#define EMPTYINDEX -9
```

Definition at line 776 of file [ftypes.h](#).

4.51.2.517 MINSPEC

```
#define MINSPEC -10
```

Definition at line 782 of file [ftypes.h](#).

4.51.2.518 USEDFLAG

```
#define USEDFLAG 2
```

Definition at line 784 of file [ftypes.h](#).

4.51.2.519 DUMMYFLAG

```
#define DUMMYFLAG 1
```

Definition at line 785 of file [ftypes.h](#).

4.51.2.520 MAINSORT

```
#define MAINSORT 0
```

Definition at line 787 of file [ftypes.h](#).

4.51.2.521 FUNCTIONSORT

```
#define FUNCTIONSORT 1
```

Definition at line 788 of file [ftypes.h](#).

4.51.2.522 SUBSORT

```
#define SUBSORT 2
```

Definition at line 789 of file [ftypes.h](#).

4.51.2.523 FLOATMODE

```
#define FLOATMODE 1
```

Definition at line 791 of file [ftypes.h](#).

4.51.2.524 RATIONALMODE

```
#define RATIONALMODE 0
```

Definition at line 792 of file [ftypes.h](#).

4.51.2.525 NUMSPECSETS

```
#define NUMSPECSETS 10
```

Definition at line 794 of file [ftypes.h](#).

4.51.2.526 ISZERO

```
#define ISZERO 1
```

Definition at line 796 of file [ftypes.h](#).

4.51.2.527 ISUNMODIFIED

```
#define ISUNMODIFIED 2
```

Definition at line 797 of file [ftypes.h](#).

4.51.2.528 ISCOMPRESSED

```
#define ISCOMPRESSED 4
```

Definition at line 798 of file [ftypes.h](#).

4.51.2.529 ISINRHS

```
#define ISINRHS 8
```

Definition at line 799 of file [ftypes.h](#).

4.51.2.530 ISFACTORIZED

```
#define ISFACTORIZED 16
```

Definition at line 800 of file [ftypes.h](#).

4.51.2.531 TOBEFACTORED

```
#define TOBEFACTORED 32
```

Definition at line 801 of file [ftypes.h](#).

4.51.2.532 TOBEUNFACTORED

```
#define TOBEUNFACTORED 64
```

Definition at line 802 of file [ftypes.h](#).

4.51.2.533 KEEPZERO

```
#define KEEPZERO 128
```

Definition at line 803 of file [ftypes.h](#).

4.51.2.534 VARTYPENONE

```
#define VARTYPENONE 0
```

Definition at line 805 of file [ftypes.h](#).

4.51.2.535 VARTYPECOMPLEX

```
#define VARTYPECOMPLEX 1
```

Definition at line 806 of file [ftypes.h](#).

4.51.2.536 VARTYPEIMAGINARY

```
#define VARTYPEIMAGINARY 2
```

Definition at line 807 of file [ftypes.h](#).

4.51.2.537 VARTYPEROOTOFUNITY

```
#define VARTYPEROOTOFUNITY 4
```

Definition at line 808 of file [ftypes.h](#).

4.51.2.538 VARTYPEMINUS

```
#define VARTYPEMINUS 8
```

Definition at line 809 of file [ftypes.h](#).

4.51.2.539 CYCLESYMMETRIC

```
#define CYCLESYMMETRIC 1
```

Definition at line 810 of file [ftypes.h](#).

4.51.2.540 RCYCLESYMMETRIC

```
#define RCYCLESYMMETRIC 2
```

Definition at line 811 of file [ftypes.h](#).

4.51.2.541 SYMMETRIC

```
#define SYMMETRIC 3
```

Definition at line 812 of file [ftypes.h](#).

4.51.2.542 ANTISYMMETRIC

```
#define ANTISYMMETRIC 4
```

Definition at line 813 of file [ftypes.h](#).

4.51.2.543 REVERSEORDER

```
#define REVERSEORDER 256
```

Definition at line 814 of file [ftypes.h](#).

4.51.2.544 SUBMULTI

```
#define SUBMULTI 1
```

Definition at line 820 of file [ftypes.h](#).

4.51.2.545 SUBONCE

```
#define SUBONCE 2
```

Definition at line 821 of file [ftypes.h](#).

4.51.2.546 SUBONLY

```
#define SUBONLY 3
```

Definition at line 822 of file [ftypes.h](#).

4.51.2.547 SUBMANY

```
#define SUBMANY 4
```

Definition at line 823 of file [ftypes.h](#).

4.51.2.548 SUBVECTOR

```
#define SUBVECTOR 5
```

Definition at line 824 of file [ftypes.h](#).

4.51.2.549 SUBSELECT

```
#define SUBSELECT 6
```

Definition at line 825 of file [ftypes.h](#).

4.51.2.550 SUBALL

```
#define SUBALL 7
```

Definition at line 826 of file [ftypes.h](#).

4.51.2.551 SUBMASK

```
#define SUBMASK 15
```

Definition at line 827 of file [ftypes.h](#).

4.51.2.552 SUBDISORDER

```
#define SUBDISORDER 16
```

Definition at line 828 of file [ftypes.h](#).

4.51.2.553 SUBAFTER

```
#define SUBAFTER 32
```

Definition at line 829 of file [ftypes.h](#).

4.51.2.554 SUBAFTERNOT

```
#define SUBAFTERNOT 64
```

Definition at line 830 of file [ftypes.h](#).

4.51.2.555 IDHEAD

```
#define IDHEAD 6
```

Definition at line 832 of file [ftypes.h](#).

4.51.2.556 DOLLARFLAG

```
#define DOLLARFLAG 1
```

Definition at line 834 of file [ftypes.h](#).

4.51.2.557 NORMALIZEFLAG

```
#define NORMALIZEFLAG 2
```

Definition at line 835 of file [ftypes.h](#).

4.51.2.558 GIDENT

```
#define GIDENT 1
```

Definition at line 837 of file [ftypes.h](#).

4.51.2.559 GFIVE

```
#define GFIVE 4
```

Definition at line 838 of file [ftypes.h](#).

4.51.2.560 GPLUS

```
#define GPLUS 3
```

Definition at line 839 of file [ftypes.h](#).

4.51.2.561 GMINUS

```
#define GMINUS 2
```

Definition at line 840 of file [ftypes.h](#).

4.51.2.562 LONGNUMBER

```
#define LONGNUMBER 1
```

Definition at line 846 of file [ftypes.h](#).

4.51.2.563 MATCH

```
#define MATCH 2
```

Definition at line 847 of file [ftypes.h](#).

4.51.2.564 COEFFI

```
#define COEFFI 3
```

Definition at line 848 of file [ftypes.h](#).

4.51.2.565 SUBEXPR

```
#define SUBEXPR 4
```

Definition at line 849 of file [ftypes.h](#).

4.51.2.566 MULTIPLEOF

```
#define MULTIPLEOF 5
```

Definition at line 850 of file [ftypes.h](#).

4.51.2.567 IFDOLLAR

```
#define IFDOLLAR 6
```

Definition at line 851 of file [ftypes.h](#).

4.51.2.568 IFEXPRESSION

```
#define IFEXPRESSION 7
```

Definition at line 852 of file [ftypes.h](#).

4.51.2.569 IFDOLLAREXTRA

```
#define IFDOLLAREXTRA 8
```

Definition at line 853 of file [ftypes.h](#).

4.51.2.570 IFISFACTORIZED

```
#define IFISFACTORIZED 9
```

Definition at line 854 of file [ftypes.h](#).

4.51.2.571 IFOCCURS

```
#define IFOCCURS 10
```

Definition at line 855 of file [ftypes.h](#).

4.51.2.572 IFUSERFLAG

```
#define IFUSERFLAG 11
```

Definition at line 856 of file [ftypes.h](#).

4.51.2.573 IFFLOATNUMBER

```
#define IFFLOATNUMBER 12
```

Definition at line 857 of file [ftypes.h](#).

4.51.2.574 GREATER

```
#define GREATER 0
```

Definition at line 858 of file [ftypes.h](#).

4.51.2.575 GREATEREQUAL

```
#define GREATEREQUAL 1
```

Definition at line 859 of file [ftypes.h](#).

4.51.2.576 LESS

```
#define LESS 2
```

Definition at line 860 of file [ftypes.h](#).

4.51.2.577 LESSEQUAL

```
#define LESSEQUAL 3
```

Definition at line 861 of file [ftypes.h](#).

4.51.2.578 EQUAL

```
#define EQUAL 4
```

Definition at line 862 of file [ftypes.h](#).

4.51.2.579 NOTEQUAL

```
#define NOTEQUAL 5
```

Definition at line 863 of file [ftypes.h](#).

4.51.2.580 ORCOND

```
#define ORCOND 6
```

Definition at line 864 of file [ftypes.h](#).

4.51.2.581 ANDCOND

```
#define ANDCOND 7
```

Definition at line 865 of file [ftypes.h](#).

4.51.2.582 DUMMY

```
#define DUMMY 1
```

Definition at line 866 of file [ftypes.h](#).

4.51.2.583 SORT

```
#define SORT 1
```

Definition at line 867 of file [ftypes.h](#).

4.51.2.584 STORE

```
#define STORE 2
```

Definition at line 868 of file [ftypes.h](#).

4.51.2.585 END

```
#define END 3
```

Definition at line 869 of file [ftypes.h](#).

4.51.2.586 GLOBAL

```
#define GLOBAL 4
```

Definition at line 870 of file [ftypes.h](#).

4.51.2.587 CLEAR

```
#define CLEAR 5
```

Definition at line 871 of file [ftypes.h](#).

4.51.2.588 VECTBIT

```
#define VECTBIT 1
```

Definition at line 873 of file [ftypes.h](#).

4.51.2.589 DOTPBIT

```
#define DOTPBIT 2
```

Definition at line 874 of file [ftypes.h](#).

4.51.2.590 FUNBIT

```
#define FUNBIT 4
```

Definition at line 875 of file [ftypes.h](#).

4.51.2.591 SETBIT

```
#define SETBIT 8
```

Definition at line 876 of file [ftypes.h](#).

4.51.2.592 EXTRAPARAMETER

```
#define EXTRAPARAMETER 0x4000
```

Definition at line 878 of file [ftypes.h](#).

4.51.2.593 GENCOMMUTE

```
#define GENCOMMUTE 0
```

Definition at line 879 of file [ftypes.h](#).

4.51.2.594 GENNONCOMMUTE

```
#define GENNONCOMMUTE 0x2000
```

Definition at line 880 of file [ftypes.h](#).

4.51.2.595 NAMENOTFOUND

```
#define NAMENOTFOUND -9
```

Definition at line 882 of file [ftypes.h](#).

4.51.2.596 DOLUNDEFINED

```
#define DOLUNDEFINED 0
```

Definition at line 888 of file [ftypes.h](#).

4.51.2.597 DOLNUMBER

```
#define DOLNUMBER 1
```

Definition at line 889 of file [ftypes.h](#).

4.51.2.598 DOLARGUMENT

```
#define DOLARGUMENT 2
```

Definition at line 890 of file [ftypes.h](#).

4.51.2.599 DOLSUBTERM

```
#define DOLSUBTERM 3
```

Definition at line 891 of file [ftypes.h](#).

4.51.2.600 DOLTERMS

```
#define DOLTERMS 4
```

Definition at line 892 of file [ftypes.h](#).

4.51.2.601 DOLWILDARGS

```
#define DOLWILDARGS 5
```

Definition at line 893 of file [ftypes.h](#).

4.51.2.602 DOLINDEX

```
#define DOLINDEX 6
```

Definition at line 894 of file [ftypes.h](#).

4.51.2.603 DOLZERO

```
#define DOLZERO 7
```

Definition at line 895 of file [ftypes.h](#).

4.51.2.604 FINDLOOP

```
#define FINDLOOP 0
```

Definition at line 897 of file [ftypes.h](#).

4.51.2.605 REPLACELOOP

```
#define REPLACELOOP 1
```

Definition at line 898 of file [ftypes.h](#).

4.51.2.606 NOFUNPOWERS

```
#define NOFUNPOWERS 0
```

Definition at line 900 of file [ftypes.h](#).

4.51.2.607 COMFUNPOWERS

```
#define COMFUNPOWERS 1
```

Definition at line 901 of file [ftypes.h](#).

4.51.2.608 ALLFUNPOWERS

```
#define ALLFUNPOWERS 2
```

Definition at line 902 of file [ftypes.h](#).

4.51.2.609 PROPERORDERFLAG

```
#define PROPERORDERFLAG 0
```

Definition at line 904 of file [ftypes.h](#).

4.51.2.610 REGULAR

```
#define REGULAR 0
```

Definition at line 906 of file [ftypes.h](#).

4.51.2.611 FINISH

```
#define FINISH 1
```

Definition at line 907 of file [ftypes.h](#).

4.51.2.612 POLYADD

```
#define POLYADD 1
```

Definition at line 909 of file [ftypes.h](#).

4.51.2.613 POLYSUB

```
#define POLYSUB 2
```

Definition at line 910 of file [ftypes.h](#).

4.51.2.614 POLYMUL

```
#define POLYMUL 3
```

Definition at line 911 of file [ftypes.h](#).

4.51.2.615 POLYDIV

```
#define POLYDIV 4
```

Definition at line 912 of file [ftypes.h](#).

4.51.2.616 POLYREM

```
#define POLYREM 5
```

Definition at line 913 of file [ftypes.h](#).

4.51.2.617 POLYGCD

```
#define POLYGCD 6
```

Definition at line 914 of file [ftypes.h](#).

4.51.2.618 POLYINTFAC

```
#define POLYINTFAC 7
```

Definition at line 915 of file [ftypes.h](#).

4.51.2.619 POLYNORM

```
#define POLYNORM 8
```

Definition at line 916 of file [ftypes.h](#).

4.51.2.620 MODNONE

```
#define MODNONE 0
```

Definition at line 918 of file [ftypes.h](#).

4.51.2.621 MODSUM

```
#define MODSUM 1
```

Definition at line 919 of file [ftypes.h](#).

4.51.2.622 MODMAX

```
#define MODMAX 2
```

Definition at line 920 of file [ftypes.h](#).

4.51.2.623 MODMIN

```
#define MODMIN 3
```

Definition at line 921 of file [ftypes.h](#).

4.51.2.624 MODLOCAL

```
#define MODLOCAL 4
```

Definition at line 922 of file [ftypes.h](#).

4.51.2.625 ELEMENTUSED

```
#define ELEMENTUSED 1
```

Definition at line 924 of file [ftypes.h](#).

4.51.2.626 ELEMENTLOADED

```
#define ELEMENTLOADED 2
```

Definition at line 925 of file [ftypes.h](#).

4.51.2.627 POSNEG

```
#define POSNEG 0x1
```

Definition at line 930 of file [ftypes.h](#).

4.51.2.628 INVERSETABLE

```
#define INVERSETABLE 0x2
```

Definition at line 931 of file [ftypes.h](#).

4.51.2.629 COEFFICIENTSONLY

```
#define COEFFICIENTSONLY 0x4
```

Definition at line 932 of file [ftypes.h](#).

4.51.2.630 ALSOPOWERS

```
#define ALSOPOWERS 0x8
```

Definition at line 933 of file [ftypes.h](#).

4.51.2.631 ALSOFUNARGS

```
#define ALSOFUNARGS 0x10
```

Definition at line 934 of file [ftypes.h](#).

4.51.2.632 ALSODOLLARS

```
#define ALSODOLLARS 0x20
```

Definition at line 935 of file [ftypes.h](#).

4.51.2.633 NOINVERSES

```
#define NOINVERSES 0x40
```

Definition at line 936 of file [ftypes.h](#).

4.51.2.634 POSITIVEONLY

```
#define POSITIVEONLY 0
```

Definition at line 938 of file [ftypes.h](#).

4.51.2.635 UNPACK

```
#define UNPACK 0x80
```

Definition at line 939 of file [ftypes.h](#).

4.51.2.636 NOUNPACK

```
#define NOUNPACK 0
```

Definition at line 940 of file [ftypes.h](#).

4.51.2.637 FROMFUNCTION

```
#define FROMFUNCTION 0x100
```

Definition at line 941 of file [ftypes.h](#).

4.51.2.638 VARNAMES

```
#define VARNAMES 0
```

Definition at line 943 of file [ftypes.h](#).

4.51.2.639 AUTONAMES

```
#define AUTONAMES 1
```

Definition at line 944 of file [ftypes.h](#).

4.51.2.640 EXPRNAMES

```
#define EXPRNAMES 2
```

Definition at line 945 of file [ftypes.h](#).

4.51.2.641 DOLLARNAMES

```
#define DOLLARNAMES 3
```

Definition at line 946 of file [ftypes.h](#).

4.51.2.642 DUMMYBUFFER

```
#define DUMMYBUFFER 1
```

Definition at line 1001 of file [ftypes.h](#).

4.51.2.643 ALLARGS

```
#define ALLARGS 1
```

Definition at line 1003 of file [ftypes.h](#).

4.51.2.644 NUMARG

```
#define NUMARG 2
```

Definition at line 1004 of file [ftypes.h](#).

4.51.2.645 ARGRANGE

```
#define ARGRANGE 3
```

Definition at line 1005 of file [ftypes.h](#).

4.51.2.646 MAKEARGS

```
#define MAKEARGS 4
```

Definition at line 1006 of file [ftypes.h](#).

4.51.2.647 MAXRANGEINDICATOR

```
#define MAXRANGEINDICATOR 4
```

Definition at line 1007 of file [ftypes.h](#).

4.51.2.648 REPLACEARG

```
#define REPLACEARG 5
```

Definition at line 1008 of file [ftypes.h](#).

4.51.2.649 ENCODEARG

```
#define ENCODEARG 6
```

Definition at line 1009 of file [ftypes.h](#).

4.51.2.650 DECODEARG

```
#define DECODEARG 7
```

Definition at line 1010 of file [ftypes.h](#).

4.51.2.651 IMplodeARG

```
#define IMplodeARG 8
```

Definition at line 1011 of file [ftypes.h](#).

4.51.2.652 EXPLODEARG

```
#define EXPLODEARG 9
```

Definition at line 1012 of file [ftypes.h](#).

4.51.2.653 PERMUTEARG

```
#define PERMUTEARG 10
```

Definition at line 1013 of file [ftypes.h](#).

4.51.2.654 REVERSEARG

```
#define REVERSEARG 11
```

Definition at line 1014 of file [ftypes.h](#).

4.51.2.655 CYCLEARG

```
#define CYCLEARG 12
```

Definition at line 1015 of file [ftypes.h](#).

4.51.2.656 ISLYNDON

```
#define ISLYNDON 13
```

Definition at line 1016 of file [ftypes.h](#).

4.51.2.657 ISLYNDONR

```
#define ISLYNDONR 14
```

Definition at line 1017 of file [ftypes.h](#).

4.51.2.658 TOLYNDON

```
#define TOLYNDON 15
```

Definition at line 1018 of file [ftypes.h](#).

4.51.2.659 TOLYNDONR

```
#define TOLYNDONR 16
```

Definition at line 1019 of file [ftypes.h](#).

4.51.2.660 ADDARG

```
#define ADDARG 17
```

Definition at line 1020 of file [ftypes.h](#).

4.51.2.661 MULTIPLYARG

```
#define MULTIPLYARG 18
```

Definition at line 1021 of file [ftypes.h](#).

4.51.2.662 DROPARG

```
#define DROPARG 19
```

Definition at line 1022 of file [ftypes.h](#).

4.51.2.663 SELECTARG

```
#define SELECTARG 20
```

Definition at line 1023 of file [ftypes.h](#).

4.51.2.664 DEDUPARG

```
#define DEDUPARG 21
```

Definition at line 1024 of file [ftypes.h](#).

4.51.2.665 ZTOHARG

```
#define ZTOHARG 22
```

Definition at line 1025 of file [ftypes.h](#).

4.51.2.666 HTOZARG

```
#define HTOZARG 23
```

Definition at line 1026 of file [ftypes.h](#).

4.51.2.667 BASECODE

```
#define BASECODE 1
```

Definition at line 1034 of file [ftypes.h](#).

4.51.2.668 YESLYNDON

```
#define YESLYNDON 1
```

Definition at line 1035 of file [ftypes.h](#).

4.51.2.669 NOLYNDON

```
#define NOLYNDON 2
```

Definition at line 1036 of file [ftypes.h](#).

4.51.2.670 TOPOLYNOMIALFLAG

```
#define TOPOLYNOMIALFLAG 1
```

Definition at line 1038 of file [ftypes.h](#).

4.51.2.671 FACTARGFLAG

```
#define FACTARGFLAG 2
```

Definition at line 1039 of file [ftypes.h](#).

4.51.2.672 OLDFACTARG

```
#define OLDFACTARG 1
```

Definition at line 1041 of file [ftypes.h](#).

4.51.2.673 NEWFACTARG

```
#define NEWFACTARG 0
```

Definition at line 1042 of file [ftypes.h](#).

4.51.2.674 FROMMODULEOPTION

```
#define FROMMODULEOPTION 0
```

Definition at line 1044 of file [ftypes.h](#).

4.51.2.675 FROMPOINTINSTRUCTION

```
#define FROMPOINTINSTRUCTION 1
```

Definition at line 1045 of file [ftypes.h](#).

4.51.2.676 EXTRASYMBOL

```
#define EXTRASYMBOL 0
```

Definition at line 1047 of file [ftypes.h](#).

4.51.2.677 REGULARSYMBOL

```
#define REGULARSYMBOL 1
```

Definition at line 1048 of file [ftypes.h](#).

4.51.2.678 EXPRESSIONNUMBER

```
#define EXPRESSIONNUMBER 2
```

Definition at line 1049 of file [ftypes.h](#).

4.51.2.679 O_NONE

```
#define O_NONE 0
```

Definition at line 1051 of file [ftypes.h](#).

4.51.2.680 O_CSE

```
#define O_CSE 1
```

Definition at line 1052 of file [ftypes.h](#).

4.51.2.681 O_CSEGREEDY

```
#define O_CSEGREEDY 2
```

Definition at line 1053 of file [ftypes.h](#).

4.51.2.682 O_GREEDY

```
#define O_GREEDY 3
```

Definition at line 1054 of file [ftypes.h](#).

4.51.2.683 O_OCCURRENCE

```
#define O_OCCURRENCE 0
```

Definition at line 1056 of file [ftypes.h](#).

4.51.2.684 O_MCTS

```
#define O_MCTS 1
```

Definition at line 1057 of file [ftypes.h](#).

4.51.2.685 O_SIMULATED_ANNEALING

```
#define O_SIMULATED_ANNEALING 2
```

Definition at line 1058 of file [ftypes.h](#).

4.51.2.686 O_FORWARD

```
#define O_FORWARD 0
```

Definition at line 1060 of file [ftypes.h](#).

4.51.2.687 O_BACKWARD

```
#define O_BACKWARD 1
```

Definition at line 1061 of file [ftypes.h](#).

4.51.2.688 O_FORWARDORBACKWARD

```
#define O_FORWARDORBACKWARD 2
```

Definition at line 1062 of file [ftypes.h](#).

4.51.2.689 O_FORWARDANDBACKWARD

```
#define O_FORWARDANDBACKWARD 3
```

Definition at line 1063 of file [ftypes.h](#).

4.51.2.690 OPTHEAD

```
#define OPTHEAD 3
```

Definition at line 1065 of file [ftypes.h](#).

4.51.2.691 DOALL

```
#define DOALL 1
```

Definition at line 1066 of file [ftypes.h](#).

4.51.2.692 ONLYFUNCTIONS

```
#define ONLYFUNCTIONS 2
```

Definition at line 1067 of file [ftypes.h](#).

4.51.2.693 INUSE

```
#define INUSE 1
```

Definition at line 1069 of file [ftypes.h](#).

4.51.2.694 COULDCOMMUTE

```
#define COULDCOMMUTE 2
```

Definition at line 1070 of file [ftypes.h](#).

4.51.2.695 DOESNOTCOMMUTE

```
#define DOESNOTCOMMUTE 4
```

Definition at line 1071 of file [ftypes.h](#).

4.51.2.696 DICT_NONUMBERS

```
#define DICT_NONUMBERS 0
```

Definition at line 1073 of file [ftypes.h](#).

4.51.2.697 DICT_INTEGERONLY

```
#define DICT_INTEGERONLY 1
```

Definition at line 1074 of file [ftypes.h](#).

4.51.2.698 DICT_RATIONALONLY

```
#define DICT_RATIONALONLY 2
```

Definition at line 1075 of file [ftypes.h](#).

4.51.2.699 DICT_ALLNUMBERS

```
#define DICT_ALLNUMBERS 3
```

Definition at line 1076 of file [ftypes.h](#).

4.51.2.700 DICT_NOVARIABLES

```
#define DICT_NOVARIABLES 0
```

Definition at line 1077 of file [ftypes.h](#).

4.51.2.701 DICT_DOVARIABLES

```
#define DICT_DOVARIABLES 1
```

Definition at line 1078 of file [ftypes.h](#).

4.51.2.702 DICT_NOSPECIALS

```
#define DICT_NOSPECIALS 0
```

Definition at line 1079 of file [ftypes.h](#).

4.51.2.703 DICT_DOSPECIALS

```
#define DICT_DOSPECIALS 1
```

Definition at line 1080 of file [ftypes.h](#).

4.51.2.704 DICT_NOFUNWITHARGS

```
#define DICT_NOFUNWITHARGS 0
```

Definition at line 1081 of file [ftypes.h](#).

4.51.2.705 DICT_DOFUNWITHARGS

```
#define DICT_DOFUNWITHARGS 1
```

Definition at line 1082 of file [ftypes.h](#).

4.51.2.706 DICT_NOTINDOLLARS

```
#define DICT_NOTINDOLLARS 0
```

Definition at line 1083 of file [ftypes.h](#).

4.51.2.707 DICT_INDOLLARS

```
#define DICT_INDOLLARS 1
```

Definition at line 1084 of file [ftypes.h](#).

4.51.2.708 DICT_INTEGERNUMBER

```
#define DICT_INTEGERNUMBER 1
```

Definition at line 1086 of file [ftypes.h](#).

4.51.2.709 DICT_RATIONALNUMBER

```
#define DICT_RATIONALNUMBER 2
```

Definition at line 1087 of file [ftypes.h](#).

4.51.2.710 DICT_SYMBOL

```
#define DICT_SYMBOL 3
```

Definition at line 1088 of file [ftypes.h](#).

4.51.2.711 DICT_VECTOR

```
#define DICT_VECTOR 4
```

Definition at line 1089 of file [ftypes.h](#).

4.51.2.712 DICT_INDEX

```
#define DICT_INDEX 5
```

Definition at line 1090 of file [ftypes.h](#).

4.51.2.713 DICT_FUNCTION

```
#define DICT_FUNCTION 6
```

Definition at line 1091 of file [ftypes.h](#).

4.51.2.714 DICT_FUNCTION_WITH_ARGUMENTS

```
#define DICT_FUNCTION_WITH_ARGUMENTS 7
```

Definition at line 1092 of file [ftypes.h](#).

4.51.2.715 DICT_SPECIALCHARACTER

```
#define DICT_SPECIALCHARACTER 8
```

Definition at line 1093 of file [ftypes.h](#).

4.51.2.716 DICT_RANGE

```
#define DICT_RANGE 9
```

Definition at line 1094 of file [ftypes.h](#).

4.51.2.717 READSPECTATORFLAG

```
#define READSPECTATORFLAG 3
```

Definition at line 1096 of file [ftypes.h](#).

4.51.2.718 GLOBALSPECTATORFLAG

```
#define GLOBALSPECTATORFLAG 1
```

Definition at line 1097 of file [ftypes.h](#).

4.51.2.719 ORDEREDSET

```
#define ORDEREDSET 1
```

Definition at line 1099 of file [ftypes.h](#).

4.51.2.720 DENSETABLE

```
#define DENSETABLE 1
```

Definition at line 1101 of file [ftypes.h](#).

4.51.2.721 SPARSETABLE

```
#define SPARSETABLE 0
```

Definition at line 1102 of file [ftypes.h](#).

4.51.2.722 TOPOLOGIESONLY

```
#define TOPOLOGIESONLY 1
```

Definition at line 1108 of file [ftypes.h](#).

4.51.2.723 WITHOUTNODES

```
#define WITHOUTNODES 2
```

Definition at line 1109 of file [ftypes.h](#).

4.51.2.724 WITHEDGES

```
#define WITHEDGES 4
```

Definition at line 1110 of file [ftypes.h](#).

4.51.2.725 WITHBLOCKS

```
#define WITHBLOCKS 8
```

Definition at line 1111 of file [ftypes.h](#).

4.51.2.726 WITHONEPISETS

```
#define WITHONEPISETS 16
```

Definition at line 1112 of file [ftypes.h](#).

4.51.2.727 WITHSYMMETRIZEI

```
#define WITHSYMMETRIZEI 32
```

Definition at line 1113 of file [ftypes.h](#).

4.51.2.728 WITHSYMMETRIZEF

```
#define WITHSYMMETRIZEF 64
```

Definition at line 1114 of file [ftypes.h](#).

4.51.2.729 CHECKEXTERN

```
#define CHECKEXTERN 128
```

Definition at line 1116 of file [ftypes.h](#).

4.51.2.730 ONEPARTI

```
#define ONEPARTI 256
```

Definition at line 1118 of file [ftypes.h](#).

4.51.2.731 ONEPARTR

```
#define ONEPARTR 512
```

Definition at line 1119 of file [ftypes.h](#).

4.51.2.732 ONSHELL

```
#define ONSHELL 1024
```

Definition at line 1120 of file [ftypes.h](#).

4.51.2.733 OFFSHELL

```
#define OFFSHELL 2048
```

Definition at line 1121 of file [ftypes.h](#).

4.51.2.734 NOSIGMA

```
#define NOSIGMA 4096
```

Definition at line 1122 of file [ftypes.h](#).

4.51.2.735 SIGMA

```
#define SIGMA 8192
```

Definition at line 1123 of file [ftypes.h](#).

4.51.2.736 NOSNAIL

```
#define NOSNAIL 16384
```

Definition at line 1124 of file [ftypes.h](#).

4.51.2.737 SNAIL

```
#define SNAIL 32768
```

Definition at line 1125 of file [ftypes.h](#).

4.51.2.738 NOTADPOLE

```
#define NOTADPOLE 65536
```

Definition at line 1126 of file [ftypes.h](#).

4.51.2.739 TADPOLE

```
#define TADPOLE 131072
```

Definition at line 1127 of file [ftypes.h](#).

4.51.2.740 SIMPLE

```
#define SIMPLE 262144
```

Definition at line 1128 of file [ftypes.h](#).

4.51.2.741 NOTSIMPLE

```
#define NOTSIMPLE 524288
```

Definition at line 1129 of file [ftypes.h](#).

4.51.2.742 BIPART

```
#define BIPART 1048576
```

Definition at line 1130 of file [ftypes.h](#).

4.51.2.743 NONBIPART

```
#define NONBIPART 2097152
```

Definition at line 1131 of file [ftypes.h](#).

4.51.2.744 CYCLI

```
#define CYCLI 4194304
```

Definition at line 1132 of file [ftypes.h](#).

4.51.2.745 CYCLR

```
#define CYCLR 8388608
```

Definition at line 1133 of file [ftypes.h](#).

4.51.2.746 FLOOP

```
#define FLOOP 16777216
```

Definition at line 1134 of file [ftypes.h](#).

4.51.2.747 NOTFLOOP

```
#define NOTFLOOP 33554432
```

Definition at line 1135 of file [ftypes.h](#).

4.51.3 Typedef Documentation

4.51.3.1 PVFUNWP

```
typedef void(* PVFUNWP) ()
```

Definition at line 183 of file [ftypes.h](#).

4.51.3.2 PVFUNV

```
typedef void(* PVFUNV) ()
```

Definition at line 184 of file [ftypes.h](#).

4.51.3.3 CFUN

```
typedef int(* CFUN) ()
```

Definition at line 185 of file [ftypes.h](#).

4.51.3.4 TFUN

```
typedef int(* TFUN) ()
```

Definition at line 186 of file [ftypes.h](#).

4.51.3.5 TFUN1

```
typedef int(* TFUN1) ()
```

Definition at line 187 of file [ftypes.h](#).

4.52 ftypes.h

[Go to the documentation of this file.](#)

```
00001
00009 /* #[ License : */
00010 /*
00011 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 *   When using this file you are requested to refer to the publication
00013 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 *   This is considered a matter of courtesy as the development was paid
00015 *   for by FOM the Dutch physics granting agency and we would like to
00016 *   be able to track its scientific use to convince FOM of its value
00017 *   for the community.
00018 *
00019 *   This file is part of FORM.
00020 *
00021 *   FORM is free software: you can redistribute it and/or modify it under the
00022 *   terms of the GNU General Public License as published by the Free Software
00023 *   Foundation, either version 3 of the License, or (at your option) any later
00024 *   version.
00025 *
00026 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 *   details.
00030 *
00031 *   You should have received a copy of the GNU General Public License along
00032 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #[ License : */
00035
00051 #define WITHOUTERROR 0
00052 #define WITHERROR 1
00053
00054 /*
00055     The various streams. (look also in tools.c)
00056 */
00057
00058 #define FILESTREAM 0
00059 #define PREVARSTREAM 1
00060 #define PREREADSTREAM 2
00061 #define PIPESTREAM 3
00062 #define PRECALCSTREAM 4
00063 #define DOLLARSTREAM 5
00064 #define PREREADSTREAM2 6
00065 #define EXTERNALCHANNELSTREAM 7
00066 #define PREREADSTREAM3 8
00067 #define REVERSEFILESTREAM 9
00068 #define INPUTSTREAM 10
```

```
00069
00070 #define ENDOFSTREAM 0xFF
00071 #define ENDOFINPUT 0xFF
00072
00073 /*
00074     Types of files
00075 */
00076
00077 #define SUBROUTINEFILE 0
00078 #define PROCEDUREFILE 1
00079 #define HEADERFILE 2
00080 #define SETUPFILE 3
00081 #define TABLEBASEFILE 4
00082
00083 /*
00084     Types of modules
00085 */
00086
00087 #define FIRSTMODULE -1
00088 #define GLOBALMODULE 0
00089 #define SORTMODULE 1
00090 #define STOREMODULE 2
00091 #define CLEARMODULE 3
00092 #define ENDMODULE 4
00093
00094 #define POLYFUN 0
00095
00096 #define NOPARALLEL_DOLLAR      0x0001
00097 #define NOPARALLEL_RHS        0x0002
00098 #define NOPARALLEL_CONVPOLY   0x0004
00099 #define NOPARALLEL_SPECTATOR  0x0008
00100 #define NOPARALLEL_USER       0x0010
00101 #define NOPARALLEL_TBLDOLLAR  0x0100
00102 #define NOPARALLEL_NPROC      0x0200
00103 #define PARALLELFLAG          0x0000
00104
00105 #define PRENOACTION 0
00106 #define PRERAISEAFTER 1
00107 #define PRELOWERAFTER 2
00108 /*
00109 #define ELIUMOD 1
00110 #define ELIZMOD 2
00111 #define SKIUMOD 3
00112 #define SKIZMOD 4
00113 */
00114 #define WITHSEMICOLON 0
00115 #define WITHOUTSEMICOLON 1
00116 #define MODULEINSTACK 8
00117 #define EXECUTINGIF 0
00118 #define LOOKINGFORELSE 1
00119 #define LOOKINGFORENDIF 2
00120 #define NEWSTATEMENT 1
00121 #define OLDSTATEMENT 0
00122
00123 #define EXECUTINGPRESWITCH 0
00124 #define SEARCHINGPRECASE 1
00125 #define SEARCHINGPREENDSWITCH 2
00126
00127 #define PREPROONLY 1
00128 #define DUMPTOCOMPILER 2
00129 #define DUMPOUTTERMS 4
00130 #define DUMPINTERMS 8
00131 #define DUMPTOSORT 16
00132 #define DUMPTOPARALLEL 32
00133 #define THREADSDEBUG 64
00134
00135 #define ERROROUT 0
00136 #define INPUTOUT 1
00137 #define STATSOUT 2
00138 #define EXPRSOUT 3
00139 #define WRITEOUT 4
00140
00141 #define EXTERNALCHANNELOUT 5
00142
00143 #define NUMERICALLOOP 0
00144 #define LISTEDLOOP 1
00145 #define ONEEXPRESSION 2
00146
00147 #define PRETYPENONE 0
00148 #define PRETYPEIF 1
00149 #define PRETYPEDO 2
00150 #define PRETYPEPROCEDURE 3
00151 #define PRETYPESWITCH 4
00152 #define PRETYPEINSIDE 5
00153
00154 /*
00155     Type of statement. Used to make sure that the statements are in proper order
```



```
00156 */
00157
00158 #define DECLARATION 1
00159 #define SPECIFICATION 2
00160 #define DEFINITION 3
00161 #define STATEMENT 4
00162 #define TOOUTPUT 5
00163 #define ATENDOFMODULE 6
00164 #define MIXED2 8
00165 #define MIXED 9
00166
00167 /*
00168     The typedefs are to allow the compilers to do better error checking.
00169 */
00170
00171 #ifdef ANSI
00172     typedef void (*PVFUNWP)(WORD *);
00173 #ifdef INTELCOMPILER
00174     typedef void (*PVFUNV)();
00175     typedef int (*CFUN)();
00176 #else
00177     typedef void (*PVFUNV)(void);
00178     typedef int (*CFUN)(void);
00179 #endif
00180     typedef int (*TFUN)(UBYTE *);
00181     typedef int (*TFUN1)(UBYTE *,int);
00182 #else
00183     typedef void (*PVFUNWP)();
00184     typedef void (*PVFUNV)();
00185     typedef int (*CFUN)();
00186     typedef int (*TFUN)();
00187     typedef int (*TFUN1)();
00188 #endif
00189
00190
00191 #define NOAUTO 0
00192 #define PARTEST 1
00193 #define WITHAUTO 2
00194
00195 #define ALLVARIABLES -1
00196 #define SYMBOLONLY 1
00197 #define INDEXONLY 2
00198 #define VECTORONLY 4
00199 #define FUNCTIONONLY 8
00200 #define SETONLY 16
00201 #define EXPRESSIONONLY 32
00202
00203
00211
00212 #define CDELETE -1
00213 #define ANYTYPE -1
00214 #define CSYMBOL 0
00215 #define CINDEX 1
00216 #define CVECTOR 2
00217 #define CFUNCTION 3
00218 #define CSET 4
00219 #define CEXPRESSION 5
00220 #define CDOTPRODUCT 6
00221 #define CNUMBER 7
00222 #define CSUBEXP 8
00223 #define CDELTA 9
00224 #define CDOLLAR 10
00225 #define CDUBIOUS 11
00226 #define CRANGE 12
00227 #define CMODEL 13
00228 #define CVECTOR1 21
00229 #define CDOUBLEDOT 22
00230
00233 /*
00234     Types of tokens in the tokenizer.
00235 */
00236
00237 #define TSYMBOL -1
00238 #define TINDEX -2
00239 #define TVECTOR -3
00240 #define TFUNCTION -4
00241 #define TSET -5
00242 #define TEXPRESSION -6
00243 #define TDOTPRODUCT -7
00244 #define TNUMBER -8
00245 #define TSUBEXP -9
00246 #define TDELTA -10
00247 #define TDOLLAR -11
00248 #define TDUBIOUS -12
00249 #define LPARENTHESIS -13
00250 #define RPARENTHESIS -14
00251 #define TWILDCARD -15
```

```
00252 #define TWILDARG -16
00253 #define TDOT -17
00254 #define LBRACE -18
00255 #define RBRACE -19
00256 #define TCOMMA -20
00257 #define TFUNOPEN -21
00258 #define TFUNCLOSE -22
00259 #define TMULTIPLY -23
00260 #define TDIVIDE -24
00261 #define TPOWER -25
00262 #define TPLUS -26
00263 #define TMINUS -27
00264 #define TNOT -28
00265 #define TENDOFIT -29
00266 #define TSETOPEN -30
00267 #define TSETCLOSE -31
00268 #define TGENINDEX -32
00269 #define TCONJUGATE -33
00270 #define LRPARENTHESSES -34
00271 #define TNUMBER1 -35
00272 #define TPOWER1 -36
00273 #define EMPTY -37
00274 #define TSETNUM -38
00275 #define TSGAMMA -39
00276 #define TSETDOL -40
00277 #define TFLOAT -41
00278
00279 #define TYPEISFUN 0
00280 #define TYPEISSUB 1
00281 #define TYPEISMYSTERY -1
00282
00283 #define LHSIDEX 2
00284 #define LHSIDE 1
00285 #define RHSIDE 0
00286
00287 /*
00288     Output modes
00289 */
00290
00291 #define FORTRANMODE 1
00292 #define REDUCEMODE 2
00293 #define MAPLEMODE 3
00294 #define MATHEMATICAMODE 4
00295 #define CMODE 5
00296 #define VORTRANMODE 6
00297 #define PFORTRANMODE 7
00298 #define DOUBLEFORTRANMODE 33
00299 #define DOUBLEPRECISIONFLAG 32
00300 #define NODOUBLEMASK 31
00301 #define QUADRUPLEFORTRANMODE 65
00302 #define QUADRUPLEPRECISIONFLAG 64
00303 #define ALLINTEGERDOUBLE 128
00304 #define NOQUADMASK 63
00305 #define NORMALFORMAT 0
00306 #define NOSPACEFORMAT 1
00307
00308 #define ISNOTFORTRAN90 0
00309 #define ISFORTRAN90 1
00310
00311 #define ALSOREVERSE 1
00312 #define CHISHOLM 2
00313 #define NOTRICK 16
00314
00315 #define SORTLOWFIRST 0
00316 #define SORTHIGHFIRST 1
00317 #define SORTPOWERFIRST 2
00318 #define SORTANTIPOWER 3
00319
00320 /* These control the output of WriteStats. The different sort
00321  * types have differently formatted stats. These variables should
00322  * not have arbitrary values since they are also used as array
00323  * indices by WriteStats. */
00324 #define STATSSPLITMERGE 0
00325 #define STATSMERGETOFILE 1
00326 #define STATSPOSTSORT 2
00327 /* CHECKLOGTYPE implies that statistics will not be printed in
00328  * the log file if AM.LogType = 1 (when running with -ll or -F). */
00329 #define NOCHECKLOGTYPE 0
00330 #define CHECKLOGTYPE 1
00331
00332 #define NMIN4SHIFT 4
00333 /*
00334     The next are the main codes.
00335     Note: SETSET is not allowed to be 4*n+1
00336     We use those codes in CoIdExpression for function information
00337     after the pattern. Because SETSET also stands there we have to
00338     be careful!!
```

```
00339     Don't forget MAXBUILTINFUNCTION when adding codes!
00340     The object FUNCTION is at the start of the functions that are in regular
00341     notation. Anything below it is in special notation.
00342
00343     Remark: HAAKJE0 is for compression purposes and should only occur
00344     at moments that ARGWILD cannot occur.
00345 */
00346 #define SYMBOL 1
00347 #define DOTPRODUCT 2
00348 #define VECTOR 3
00349 #define INDEX 4
00350 #define EXPRESSION 5
00351 #define SUBEXPRESSION 6
00352 #define DOLLAREXPRESSION 7
00353 #define SETSET 8
00354 #define ARGWILD 9
00355 #define MINVECTOR 10
00356 #define SETEXP 11
00357 #define DOLLAREXPR2 12
00358 #define HAAKJE0 9
00359 #define FUNCTION 20
00360
00361 #define TMPPOLYFUN 14
00362 #define ARGFIELD 15
00363 #define SNUMBER 16
00364 #define LNUMBER 17
00365 #define HAAKJE 18
00366 #define DELTA 19
00367 #define EXPONENT 20
00368 #define DENOMINATOR 21
00369 #define SETFUNCTION 22
00370 #define GAMMA 23
00371 #define GAMMAI 24
00372 #define GAMMAFIVE 25
00373 #define GAMMASIX 26
00374 #define GAMMASEVEN 27
00375 #define SUMF1 28
00376 #define SUMF2 29
00377 #define DUMFUN 30
00378 #define REPLACEMENT 31
00379 #define REVERSEFUNCTION 32
00380 #define DISTRIBUTION 33
00381 #define DELTA3 34
00382 #define DUMMYFUN 35
00383 #define DUMMYTEN 36
00384 #define LEVICIVITA 37
00385 #define FACTORIAL 38
00386 #define INVERSEFACTORIAL 39
00387 #define BINOMIAL 40
00388 #define NUMARGSFUN 41
00389 #define SIGNFUN 42
00390 #define MODFUNCTION 43
00391 #define MOD2FUNCTION 44
00392 #define MINFUNCTION 45
00393 #define MAXFUNCTION 46
00394 #define ABSFUNCTION 47
00395 #define SIGFUNCTION 48
00396 #define INTFUNCTION 49
00397 #define THETA 50
00398 #define THETA2 51
00399 #define DELTA2 52
00400 #define DELTAP 53
00401 #define BERNOULLIFUNCTION 54
00402 #define COUNTFUNCTION 55
00403 #define MATCHFUNCTION 56
00404 #define PATTERNFUNCTION 57
00405 #define TERMFUNCTION 58
00406 #define CONJUGATION 59
00407 #define ROOTFUNCTION 60
00408 #define TABLEFUNCTION 61
00409 #define FIRSTBRACKET 62
00410 #define TERMSINEXPR 63
00411 #define NUMTERMSFUN 64
00412 #define GCDFUNCTION 65
00413 #define DIVFUNCTION 66
00414 #define REMFUNCTION 67
00415 #define MAXPOWEROF 68
00416 #define MINPOWEROF 69
00417 #define TABLESTUB 70
00418 #define FACTORIN 71
00419 #define TERMSINBRACKET 72
00420 #define WILDARGFUN 73
00421 /*
00422     In the past we would add new functions here and raise the numbers
00423     on the special reserved names. This is impractical in the light of
00424     the .sav files. The .sav files need a mechanism that contains the
00425     value of MAXBUILTINFUNCTION at the moment of writing. This allows
```

```
00426     form corrections if this value has changed in the mean time.
00427 */
00428 #define SQRTFUNCTION 74
00429 #define LNFUNCTION 75
00430 #define SINFUNCTION 76
00431 #define COSFUNCTION 77
00432 #define TANFUNCTION 78
00433 #define ASINFUNCTION 79
00434 #define ACOSFUNCTION 80
00435 #define ATANFUNCTION 81
00436 #define ATAN2FUNCTION 82
00437 #define SINHFUNCTION 83
00438 #define COSHFUNCTION 84
00439 #define TANHFUNCTION 85
00440 #define ASINHFUNCTION 86
00441 #define ACOSHFUNCTION 87
00442 #define ATANHFUNCTION 88
00443 #define LI2FUNCTION 89
00444 #define LINFUNCTION 90
00445
00446 #define EXTRASYMFUN 91
00447 #define RANDOMFUNCTION 92
00448 #define RANPERM 93
00449 #define NUMFACTORS 94
00450 #define FIRSTTERM 95
00451 #define CONTENTTERM 96
00452 #define PRIMENUMBER 97
00453 #define EXTEUCLIDEAN 98
00454 #define MAKERATIONAL 99
00455 #define INVERSEFUNCTION 100
00456 #define IDFUNCTION 101
00457 #define PUTFIRST 102
00458 #define PERMUTATIONS 103
00459 #define PARTITIONS 104
00460 #define MULFUNCTION 105
00461 #define MOEBIUS 106
00462 #define TOPOLOGIES 107
00463 #define DIAGRAMS 108
00464 #define TOPO 109
00465 #define NODEFUNCTION 110
00466 #define EDGE 111
00467 #define SIZEOFFUNCTION 112
00468 #define BLOCK 113
00469 #define ONEPI 114
00470 #define PHI 115
00471 #define FLOATFUN 116
00472 #define TOFLOAT 117
00473 #define TORAT 118
00474 #define MZV 119
00475 #define EULER 120
00476 #define MZVHALF 121
00477 #define AGMFUNCTION 122
00478 #define GAMMAFUN 123
00479 #define EXPFUNCTION 124
00480 #define HPLFUNCTION 125
00481 #define MPLFUNCTION 126
00482 #define MAXBUILTINFUNCTION 126
00483
00484 #define FIRSTUSERFUNCTION 150
00485
00486 #define ALLFUNCTIONS -1
00487 #define ALLMZVFUNCTIONS -2
00488
00489 /*
00490     Note: if we add a builtin table we have to look also inside names.c
00491     in the routine Globalize because there we assume there does not exist
00492     such an object
00493 */
00494
00495 #define ISYMBOL 0
00496 #define PISYMBOL 1
00497 #define COEFFSYMBOL 2
00498 #define NUMERATORSYMBOL 3
00499 #define DENOMINATORSYMBOL 4
00500 #define WILDARGSYMBOL 5
00501 #define DIMENSIONSYMBOL 6
00502 #define FACTORSYMBOL 7
00503 #define SEPARATESYMBOL 8
00504 #define EESYMBOL 9
00505 #define EMSYMBOL 10
00506
00507 #define BUILTINSYMBOLS 11
00508 #define FIRSTUSERSYMBOL 20
00509
00510 #define BUILTININDICES 1
00511 #define BUILTINVECTORS 1
00512 #define BUILTINDOLLARS 1
```

```
00513
00514 #define WILDARGVECTOR 0
00515 #define WILDARGINDEX 0
00516
00517 /*
00518     The objects that have a name that starts with TYPE are codes of statements
00519     made by the compiler. Each statement starts with such a code, followed by
00520     its size. For how most of these statements are used can be seen in the
00521     Generator function in the file proces.c
00522     TYPEOPERATION is an anachronism that remains used only for the statements
00523     that are executed in the file opera.c (like traces and contractions).
00524 */
00525
00526 #define TYPEEXPRESSION 0
00527 #define TYPEIDNEW 1
00528 #define TYPEIDOLD 2
00529 #define TYPEOPERATION 3
00530 #define TYPEREPEAT 4
00531 #define TYPEENDREPEAT 5
00532 /*
00533     The next counts must be higher than the ones before
00534 */
00535 #define TYPECOUNT 20
00536 #define TYPEMULT 21
00537 #define TYPEGOTO 22
00538 #define TYPEDISCARD 23
00539 #define TYPEIF 24
00540 #define TYPEELSE 25
00541 #define TYPEELIF 26
00542 #define TYPEENDIF 27
00543 #define TYPESUM 28
00544 #define TYPECHISHOLM 29
00545 #define TYPEREVERSE 30
00546 #define TYPEARG 31
00547 #define TYPENORM 32
00548 #define TYPENORM2 33
00549 #define TYPENORM3 34
00550 #define TYPEEXIT 35
00551 #define TYPESETEXIT 36
00552 #define TYPEPRINT 37
00553 #define TYPEFPRINT 38
00554 #define TYPEREDEFPRE 39
00555 #define TYPESPLITARG 40
00556 #define TYPESPLITARG2 41
00557 #define TYPEFACTARG 42
00558 #define TYPEFACTARG2 43
00559 #define TYPETRY 44
00560 #define TYPEASSIGN 45
00561 #define TYPERENUMBER 46
00562 #define TYPESUMFIX 47
00563 #define TYPEFINDLOOP 48
00564 #define TYPEUNRAVEL 49
00565 #define TYPEADJUSTBOUNDS 50
00566 #define TYPEINSIDE 51
00567 #define TYPETERM 52
00568 #define TYPESORT 53
00569 #define TYPEDETCURDUM 54
00570 #define TYPEINEXPRESSION 55
00571 #define TYPESPLITFIRSTARG 56
00572 #define TYPESPLITLASTARG 57
00573 #define TYPEMERGE 58
00574 #define TYPETESTUSE 59
00575 #define TYPEAPPLY 60
00576 #define TYPEAPPLYRESET 61
00577 #define TYPECHAININ 62
00578 #define TYPECHAINOUT 63
00579 #define TYPENORM4 64
00580 #define TYPEFACTOR 65
00581 #define TYPEARGIMPLODE 66
00582 #define TYPEARGEXPLODE 67
00583 #define TYPEDENOMINATORS 68
00584 #define TYPESTUFFLE 69
00585 #define TYPEDROPCOEFFICIENT 70
00586 #define TYPETRANSFORM 71
00587 #define TYPETOPOLYNOMIAL 72
00588 #define TYPEFROMPOLYNOMIAL 73
00589 #define TYPEDOLOOP 74
00590 #define TYPEENDDOLOOP 75
00591 #define TYPEDROPSYMBOLS 76
00592 #define TYPEPUTINSIDE 77
00593 #define TYPETOSPECTATOR 78
00594 #define TYPEARGTOEXTRASymbol 79
00595 #define TYPECANONICALIZE 80
00596 #define TYPESWITCH 81
00597 #define TYPEENDSWITCH 82
00598 #define TYPESETUSERFLAG 83
00599 #define TYPECLEARUSERFLAG 84
```

```
00600 #define TYPEALLLOOPS 85
00601 #define TYPEALLPATHS 86
00602 #ifdef WITHFLOAT
00603 #define TYPEEVALUATE 87
00604 #define TYPEEXPAND 88
00605 #define TYPETOFLOAT 89
00606 #define TYPETORAT 90
00607 #define TYPESTRICTROUNDING 91
00608 #define TYPECHOP 92
00609 #endif
00610
00611 /*
00612     The codes for the 'operations' that are part of TYPEOPERATION.
00613 */
00614
00615 #define TAKETRACE 1
00616 #define CONTRACT 2
00617 #define RATIO 3
00618 #define SYMMETRIZE 4
00619 #define TENVEC 5
00620 #define SUMNUM1 6
00621 #define SUMNUM2 7
00622
00623 /*
00624     The various types of wildcards.
00625 */
00626
00627 #define WILDDUMMY 0
00628 #define SYMTONUM 1
00629 #define SYMTOSYM 2
00630 #define SYMTOSUB 3
00631 #define VECTOMIN 4
00632 #define VECTOVEC 5
00633 #define VECTOSUB 6
00634 #define INDTOIND 7
00635 #define INDTOSUB 8
00636 #define FUNTOFUN 9
00637 #define ARGTOARG 10
00638 #define ARLTOARL 11
00639 #define EXPTOEXP 12
00640 #define FROMBRAC 13
00641 #define FROMSET 14
00642 #define SETTONUM 15
00643 #define WILDCARDS 16
00644 #define SETNUMBER 17
00645 #define LOADDOLLAR 18
00646
00647 /*
00648     Some new types of wildcards that hold only for function arguments.
00649 */
00649 #define NUMTONUM 20
00650 #define NUMTOSYM 21
00651 #define NUMTOIND 22
00652 #define NUMTOSUB 23
00653
00654 /*
00655     Flag or-ed with ARGTOARG to give the number of arguments.
00656 */
00656 #define EATTENSOR 0x2000
00657
00658 /*
00659     Dirty flags (introduced when functions got a field with a dirty flag)
00660 */
00661
00662 #define CLEANFLAG 0
00663 #define DIRTYFLAG 1
00664 #define DIRTYSYMFLAG 2
00665 #define MUSTCLEANPRF 4
00666 #define SUBTERMUSED1 8
00667 #define SUBTERMUSED2 16
00668 #define ALLDIRTY (DIRTYFLAG|DIRTYSYMFLAG)
00669
00670 #define ARGHEAD 2
00671 #define FUNHEAD 3
00672 #define SUBEXPSIZE 5
00673 #define EXPRHEAD 5
00674 #define TYPEARGHEADSIZE 6
00675
00676 /*
00677     Actions to be taken with expressions. They are marked with these objects
00678     during compilation.
00679 */
00680
00681 #define SKIP 1
00682 #define DROP 2
00683 #define HIDE 3
00684 #define UNHIDE 4
00685 #define INTOHIDE 5
00686
```

```

00687 /*
00688     Types of expressions
00689 */
00690
00691 #define LOCALEXPRESSION 0
00692 #define SKIPLEXPRESSION 1
00693 #define DROPLEXPRESSION 2
00694 #define DROPEDEXPRESSION 3
00695 #define GLOBALEXPRESSION 4
00696 #define SKIPGEXPRESSION 5
00697 #define DROPGEXPRESSION 6
00698 #define STOREDEXPRESSION 8
00699 #define HIDDENLEXPRESSION 9
00700 #define HIDDENGEXPRESSION 13
00701 #define INCLEXPRESSION 9
00702 #define HIDELEXPRESSION 10
00703 #define HIDEGEXPRESSION 14
00704 #define DROPHLEXPRESSION 11
00705 #define DROPHGEXPRESSION 15
00706 #define UNHIDELEXPRESSION 12
00707 #define UNHIDEGEXPRESSION 16
00708 #define INTOHIDELEXPRESSION 17
00709 #define INTOHIDEGEXPRESSION 18
00710 #define SPECTATOREXPRESSION 19
00711 #define DROPSPECTATOREXPRESSION 20
00712 #define SKIPUNHIDELEXPRESSION 21
00713 #define SKIPUNHIDEGEXPRESSION 22
00714
00715 #define PRINTOFF 0
00716 #define PRINTON 1
00717 #define PRINTCONTENTS 2
00718 #define PRINTCONTENT 3
00719 #define PRINTLFILE 4
00720 #define PRINTONETERM 8
00721 #define PRINTONEFUNCTION 16
00722 #define PRINTALL 32
00723
00724 /*
00725     Special codes for the replace variable in the EXPRESSIONS struct
00726 */
00727
00728 #define REGULAREXPRESSION -1
00729 #define REDEFINEDEXPRESSION -2
00730 #define NEWLYDEFINEDEXPRESSION -3
00731
00739 #define VERTEXFUNCTION -1
00740 #define GENERALFUNCTION 0
00741 #define TENSORFUNCTION 2
00742 #define GAMMAFUNCTION 4
00743
00744 /*
00745     Special sets
00746 */
00747
00748
00749 #define POS_ 0 /* integer > 0 */
00750 #define POS0_ 1 /* integer >= 0 */
00751 #define NEG_ 2 /* integer < 0 */
00752 #define NEG0_ 3 /* integer <= 0 */
00753 #define EVEN_ 4 /* integer (even) */
00754 #define ODD_ 5 /* integer (odd) */
00755 #define Z_ 6 /* integer */
00756 #define SYMBOL_ 7 /* symbol only */
00757 #define FIXED_ 8 /* fixed index */
00758 #define INDEX_ 9 /* index only */
00759 #define Q_ 10 /* rational */
00760 #define DUMMYINDEX_ 11 /* dummy index only */
00761 #define VECTOR_ 12 /* vector only */
00762
00763 /*
00764     Special indices.
00765 */
00766
00767 #define GAMMA1 0
00768 #define GAMMA5 -1
00769 #define GAMMA6 -2
00770 #define GAMMA7 -3
00771 #define FUNNYVEC -4
00772 #define FUNNYWILD -5
00773 #define SUMMEDIND -6
00774 #define NOINDEX -7
00775 #define FUNNYDOLLAR -8
00776 #define EMPTYINDEX -9
00777
00778 /*
00779     The next one should be less than all of the above special indices.
00780 */
00781
00782 #define MINSPEC -10

```

```
00783
00784 #define USEDFLAG 2
00785 #define DUMMYFLAG 1
00786
00787 #define MAINSORT 0
00788 #define FUNCTIONSORT 1
00789 #define SUBSORT 2
00790
00791 #define FLOATMODE 1
00792 #define RATIONALMODE 0
00793
00794 #define NUMSPECSETS 10
00795
00796 #define ISZERO 1
00797 #define ISUNMODIFIED 2
00798 #define ISCOMPRESSED 4
00799 #define ISINRHS 8
00800 #define ISFACTORIZED 16
00801 #define TOBEFACTORED 32
00802 #define TOBEUNFACTORED 64
00803 #define KEEPZERO 128
00804
00805 #define VARTYPENONE 0
00806 #define VARTYPECOMPLEX 1
00807 #define VARTYPEIMAGINARY 2
00808 #define VARTYPEROOTOFUNITY 4
00809 #define VARTYPEMINUS 8
00810 #define CYCLESYMMETRIC 1
00811 #define RCYCLESYMMETRIC 2
00812 #define SYMMETRIC 3
00813 #define ANTISYMMETRIC 4
00814 #define REVERSEORDER 256
00815
00816 /*
00817     Types of id statements (substitutions)
00818 */
00819
00820 #define SUBMULTI 1
00821 #define SUBONCE 2
00822 #define SUBONLY 3
00823 #define SUBMANY 4
00824 #define SUBVECTOR 5
00825 #define SUBSELECT 6
00826 #define SUBALL 7
00827 #define SUBMASK 15
00828 #define SUBDISORDER 16
00829 #define SUBAFTER 32
00830 #define SUBAFTERNOT 64
00831
00832 #define IDHEAD 6
00833
00834 #define DOLLARFLAG 1
00835 #define NORMALIZEFLAG 2
00836
00837 #define GIDENT 1
00838 #define GFIVE 4
00839 #define GPLUS 3
00840 #define GMINUS 2
00841
00842 /*
00843     Types of objects inside an if clause.
00844 */
00845
00846 #define LONGNUMBER 1
00847 #define MATCH 2
00848 #define COEFFI 3
00849 #define SUBEXPR 4
00850 #define MULTIPLEOF 5
00851 #define IFDOLLAR 6
00852 #define IFEXPRESSION 7
00853 #define IFDOLLAREXTRA 8
00854 #define IFISFACTORIZED 9
00855 #define IFOCCURS 10
00856 #define IFUSERFLAG 11
00857 #define IFFLOATNUMBER 12
00858 #define GREATER 0
00859 #define GREATEREQUAL 1
00860 #define LESS 2
00861 #define LESSEQUAL 3
00862 #define EQUAL 4
00863 #define NOTEQUAL 5
00864 #define ORCOND 6
00865 #define ANDCOND 7
00866 #define DUMMY 1
00867 #define SORT 1
00868 #define STORE 2
00869 #define END 3
```



```
00870 #define GLOBAL 4
00871 #define CLEAR 5
00872
00873 #define VECTBIT 1
00874 #define DOTPBIT 2
00875 #define FUNBIT 4
00876 #define SETBIT 8
00877
00878 #define EXTRAPARAMETER 0x4000
00879 #define GENCOMMUTE 0
00880 #define GENNONCOMMUTE 0x2000
00881
00882 #define NAMENOTFOUND -9
00883
00884 /*
00885     Types of dollar expressions.
00886 */
00887
00888 #define DOLUNDEFINED 0
00889 #define DOLNUMBER 1
00890 #define DOLARGUMENT 2
00891 #define DOLSUBTERM 3
00892 #define DOLTERMS 4
00893 #define DOLWILDARGS 5
00894 #define DOLINDEX 6
00895 #define DOLZERO 7
00896
00897 #define FINDLOOP 0
00898 #define REPLACELOOP 1
00899
00900 #define NOFUNPOWERS 0
00901 #define COMFUNPOWERS 1
00902 #define ALLFUNPOWERS 2
00903
00904 #define PROPERORDERFLAG 0
00905
00906 #define REGULAR 0
00907 #define FINISH 1
00908
00909 #define POLYADD 1
00910 #define POLYSUB 2
00911 #define POLYMUL 3
00912 #define POLYDIV 4
00913 #define POLYREM 5
00914 #define POLYGCD 6
00915 #define POLYINTFAC 7
00916 #define POLYNORM 8
00917
00918 #define MODNONE 0
00919 #define MODSUM 1
00920 #define MODMAX 2
00921 #define MODMIN 3
00922 #define MODLOCAL 4
00923
00924 #define ELEMENTUSED 1
00925 #define ELEMENTLOADED 2
00926 /*
00927     Variables for the modulus statement, flags in AC.modmode
00928     For explanation, see CoModulus
00929 */
00930 #define POSNEG 0x1
00931 #define INVERSETABLE 0x2
00932 #define COEFFICIENTSONLY 0x4
00933 #define ALSOPOWERS 0x8
00934 #define ALSOFUNARGS 0x10
00935 #define ALSODOLLARS 0x20
00936 #define NOINVERSES 0x40
00937
00938 #define POSITIVEONLY 0
00939 #define UNPACK 0x80
00940 #define NOUNPACK 0
00941 #define FROMFUNCTION 0x100
00942
00943 #define VARNAMES 0
00944 #define AUTONAMES 1
00945 #define EXPRNAMES 2
00946 #define DOLLARNAMES 3
00947
00948 #ifndef WITHPTHREADS
00949 /*
00950     Signals that the workers have to react to
00951 */
00952
00953 #define TERMINATETHREAD -1
00954 #define STARTNEWEXPRESSION 1
00955 #define LOWESTLEVELGENERATION 2
00956 #define FINISHEXPRESSION 3
```

```

00957 #define CLEANUPEXPRESSION 4
00958 #define HIGHERLEVELGENERATION 5
00959 #define STARTNEWMODULE 6
00960 #define CLAIMOUTPUT 7
00961 #define FINISHEXPRESSION2 8
00962 #define INISORTBOT 7
00963 #define RUNSORTBOT 8
00964 #define DOONEEXPRESSION 9
00965 #define DOBRACKETS 10
00966 #define CLEARCLOCK 11
00967 #define MCTSEXPANDTREE 12
00968 #define OPTIMIZEEXPRESSION 13
00969
00970 #define MASTERBUFFERISFULL 1
00971
00972 /*
00973     Bucket states
00974 */
00975
00976 #define BUCKETFREE 1
00977 #define BUCKETINUSE 0
00978 #define BUCKETCOMINGFREE 2
00979 #define BUCKETFILLED -1
00980 #define BUCKETATEND -2
00981 #define BUCKETTERMINATED 3
00982 #define BUCKETRELEASED 4
00983
00984 #define NUMBEROFBLOCKSINSORT 10
00985 #define MINIMUMNUMBEROFTERMS 10
00986
00987 #define BUCKETDOINGTERM 1
00988 #define BUCKETASSIGNED -1
00989 #define BUCKETTOBERELEASED -2
00990 #define BUCKETPREPARINGTERM 0
00991
00992 #define BUCKETDOINGTERMS 0
00993 #define BUCKETDOINGBRACKET 1
00994 #endif
00995
00996 /*
00997     The next variable is because there is some use of cbufnum that is
00998     probably irrelevant. We use here DUMMYBUFNUM instead of AC.cbufnum
00999     just in case we run into trouble later.
01000 */
01001 #define DUMMYBUFFER 1
01002
01003 #define ALLARGS 1
01004 #define NUMARG 2
01005 #define ARGGRANGE 3
01006 #define MAKEARGS 4
01007 #define MAXRANGEINDICATOR 4
01008 #define REPLACEARG 5
01009 #define ENCODEARG 6
01010 #define DECODEARG 7
01011 #define IMplodeARG 8
01012 #define EXPLODEARG 9
01013 #define PERMUTEARG 10
01014 #define REVERSEARG 11
01015 #define CYCLEARG 12
01016 #define ISLYNDON 13
01017 #define ISLYNDONR 14
01018 #define TOLYNDON 15
01019 #define TOLYNDONR 16
01020 #define ADDARG 17
01021 #define MULTIPLYARG 18
01022 #define DROPARG 19
01023 #define SELECTARG 20
01024 #define DEDUPARG 21
01025 #define ZTOHARG 22
01026 #define HTOZARG 23
01027 /*
01028 #define ZTOSARG 24
01029 #define STOZARG 25
01030 #define HTOSARG 26
01031 #define STOARG 27
01032 */
01033
01034 #define BASECODE 1
01035 #define YESLYNDON 1
01036 #define NOLYNDON 2
01037
01038 #define TOPOLYNOMIALFLAG 1
01039 #define FACTARGFLAG 2
01040
01041 #define OLDFACTARG 1
01042 #define NEWFACTARG 0
01043

```

```

01044 #define FROMMODULEOPTION 0
01045 #define FROMPOINTINSTRUCTION 1
01046
01047 #define EXTRASYMBOL 0
01048 #define REGULARSYMBOL 1
01049 #define EXPRESSIONNUMBER 2
01050
01051 #define O_NONE 0
01052 #define O_CSE 1
01053 #define O_CSEGREEDY 2
01054 #define O_GREEDY 3
01055
01056 #define O_OCCURRENCE 0
01057 #define O_MCTS 1
01058 #define O_SIMULATED_ANNEALING 2
01059
01060 #define O_FORWARD 0
01061 #define O_BACKWARD 1
01062 #define O_FORWARDORBACKWARD 2
01063 #define O_FORWARDANDBACKWARD 3
01064
01065 #define OPTHEAD 3
01066 #define DOALL 1
01067 #define ONLYFUNCTIONS 2
01068
01069 #define INUSE 1
01070 #define COULDCOMMUTE 2
01071 #define DOESNOTCOMMUTE 4
01072
01073 #define DICT_NONUMBERS 0
01074 #define DICT_INTEGERONLY 1
01075 #define DICT_RATIONALONLY 2
01076 #define DICT_ALLNUMBERS 3
01077 #define DICT_NOVARIABLES 0
01078 #define DICT_DOVARIABLES 1
01079 #define DICT_NOSPECIALS 0
01080 #define DICT_DOSPECIALS 1
01081 #define DICT_NOFUNWITHARGS 0
01082 #define DICT_DOFUNWITHARGS 1
01083 #define DICT_NOTINDOLLARS 0
01084 #define DICT_INDOLLARS 1
01085
01086 #define DICT_INTEGERNUMBER 1
01087 #define DICT_RATIONALNUMBER 2
01088 #define DICT_SYMBOL 3
01089 #define DICT_VECTOR 4
01090 #define DICT_INDEX 5
01091 #define DICT_FUNCTION 6
01092 #define DICT_FUNCTION_WITH_ARGUMENTS 7
01093 #define DICT_SPECIALCHARACTER 8
01094 #define DICT_RANGE 9
01095
01096 #define READSPECTATORFLAG 3
01097 #define GLOBALSPECTATORFLAG 1
01098
01099 #define ORDEREDSET 1
01100
01101 #define DENSETABLE 1
01102 #define SPARSETABLE 0
01103
01104 // Diagram generator flags. They should be powers of two, since they are added
01105 // to pass to diagrams and masked in diawrap.cc to check the flags.
01106 // We use a "stringified" version of these when defining the FORM preprocessor
01107 // variables, so can't neatly use "1<10" etc here.
01108 #define TOPOLOGIESONLY 1
01109 #define WITHOUTNODES 2
01110 #define WITHEGES 4
01111 #define WITHBLOCKS 8
01112 #define WITHONEPISETS 16
01113 #define WITHSYMMETRIZEI 32
01114 #define WITHSYMMETRIZEF 64
01115 // This is not an "option" preprocessor var but is set by "external" particle definitions
01116 #define CHECKEXTERN 128
01117 // The "ggraf compatible" filtering flags:
01118 #define ONEPARTI 256
01119 #define ONEPARTR 512
01120 #define ONSHELL 1024
01121 #define OFFSHELL 2048
01122 #define NOSIGMA 4096
01123 #define SIGMA 8192
01124 #define NOSNAIL 16384
01125 #define SNAIL 32768
01126 #define NOTADPOLE 65536
01127 #define TADPOLE 131072
01128 #define SIMPLE 262144
01129 #define NOTSIMPLE 524288
01130 #define BIPART 1048576

```

```


01131 #define NONBIPART      2097152
01132 #define CYCLI           4194304
01133 #define CYCLR           8388608
01134 #define FLOOP           16777216
01135 #define NOTFLOOP        33554432
01136

```

4.53 function.c File Reference

```
#include "form3.h"
```

Include dependency graph for function.c:

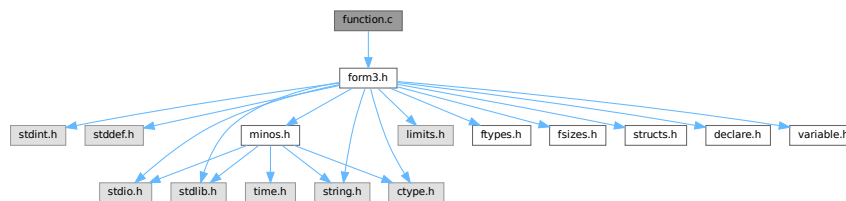

Functions

- int [MakeDirty](#) (WORD *term, WORD *x, WORD par)
- void [MarkDirty](#) (WORD *term, WORD flags)
- void [PolyFunDirty](#) (PHEAD WORD *term)
- void [PolyFunClean](#) (PHEAD WORD *term)
- WORD [Symmetrize](#) (PHEAD WORD *func, WORD *Lijst, WORD ngroups, WORD gsize, WORD type)
- int [CompGroup](#) (PHEAD WORD type, WORD **args, WORD *a1, WORD *a2, WORD num)
- int [FullSymmetrize](#) (PHEAD WORD *fun, int type)
- int [SymGen](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)
- int [SymFind](#) (PHEAD WORD *term, WORD *params)
- int [ChainIn](#) (PHEAD WORD *term, WORD funnum)
- int [ChainOut](#) (PHEAD WORD *term, WORD funnum)
- int [MatchFunction](#) (PHEAD WORD *pattern, WORD *interm, WORD *wilds)
- int [ScanFunctions](#) (PHEAD WORD *inpat, WORD *inter, WORD par)

4.53.1 Detailed Description

The file with the central routines for the pattern matching of functions and their arguments. The file also contains the routines for the execution of the Symmetrize statement and its variations (like antisymmetrize etc).

Definition in file [function.c](#).

4.53.2 Function Documentation

4.53.2.1 MakeDirty()

```

int MakeDirty (
    WORD * term,
    WORD * x,
    WORD par )

```

Definition at line 51 of file [function.c](#).

4.53.2.2 MarkDirty()

```
void MarkDirty (
    WORD * term,
    WORD flags )
```

Definition at line 97 of file [function.c](#).

4.53.2.3 PolyFunDirty()

```
void PolyFunDirty (
    PHEAD WORD * term )
```

Definition at line 139 of file [function.c](#).

4.53.2.4 PolyFunClean()

```
void PolyFunClean (
    PHEAD WORD * term )
```

Definition at line 174 of file [function.c](#).

4.53.2.5 Symmetrize()

```
WORD Symmetrize (
    PHEAD WORD * func,
    WORD * Lijst,
    WORD ngroups,
    WORD gsize,
    WORD type )
```

Definition at line 213 of file [function.c](#).

4.53.2.6 CompGroup()

```
int CompGroup (
    PHEAD WORD type,
    WORD ** args,
    WORD * a1,
    WORD * a2,
    WORD num )
```

Definition at line 373 of file [function.c](#).

4.53.2.7 FullSymmetrize()

```
int FullSymmetrize (
    PHEAD WORD * fun,
    int type )
```

Definition at line 473 of file [function.c](#).

4.53.2.8 SymGen()

```
int SymGen (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line 518 of file [function.c](#).

4.53.2.9 SymFind()

```
int SymFind (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line 633 of file [function.c](#).

4.53.2.10 ChainIn()

```
int ChainIn (
    PHEAD WORD * term,
    WORD funnum )
```

Definition at line 691 of file [function.c](#).

4.53.2.11 ChainOut()

```
int ChainOut (
    PHEAD WORD * term,
    WORD funnum )
```

Definition at line 748 of file [function.c](#).

4.53.2.12 MatchFunction()

```
int MatchFunction (
    PHEAD WORD * pattern,
    WORD * interm,
    WORD * wilds )
```

Definition at line 826 of file [function.c](#).

4.53.2.13 ScanFunctions()

```
int ScanFunctions (
    PHEAD WORD * inpat,
    WORD * inter,
    WORD par )
```

Definition at line 1618 of file [function.c](#).

4.54 function.c

[Go to the documentation of this file.](#)

```

00001
00008 /* #[ License : */
00009 /*
00010 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 *   When using this file you are requested to refer to the publication
00012 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 *   This is considered a matter of courtesy as the development was paid
00014 *   for by FOM the Dutch physics granting agency and we would like to
00015 *   be able to track its scientific use to convince FOM of its value
00016 *   for the community.
00017 *
00018 *   This file is part of FORM.
00019 *
00020 *   FORM is free software: you can redistribute it and/or modify it under the
00021 *   terms of the GNU General Public License as published by the Free Software
00022 *   Foundation, either version 3 of the License, or (at your option) any later
00023 *   version.
00024 *
00025 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 *   details.
00029 *
00030 *   You should have received a copy of the GNU General Public License along
00031 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* #[ License : */
00034 /*
00035     #[ Includes : function.c
00036 */
00037
00038 #include "form3.h"
00039
00040 /*
00041     #[ Includes :
00042     #[ Utilities :
00043         #[ MakeDirty :
00044
00045         Routine finds the function with the address x in it
00046         and mark all arguments that contain x as dirty.
00047         if par == 0 term is a full term, else term is the start of a
00048         function
00049 */
00050
00051 int MakeDirty(WORD *term, WORD *x, WORD par)
00052 {
00053     WORD *next, *n;
00054     if ( !par ) {
00055         next = term; next += *term;
00056         next -= ABS(next[-1]);
00057         term++;
00058         if ( x < term ) return(0);
00059         if ( x >= next ) return(0);
00060         while ( term < next ) {
00061             n = term + term[1];
00062             if ( x < n ) break;
00063             term = n;
00064         }
00065         /* next = n; */
00066     }
00067     else {
00068         next = term + term[1];
00069         if ( x < term || x >= next ) return(0);
00070     }
00071     if ( *term < FUNCTION ) return(0);
00072     if ( functions[*term-FUNCTION].spec >= TENSORFUNCTION ) return(0);
00073     term += FUNHEAD;
00074     if ( x < term ) return(0);
00075     next = term; NEXTARG(next)
00076     while ( x >= next ) { term = next; NEXTARG(next) }
00077     if ( *term < 0 ) return(0);
00078     term[1] = 1;
00079     term += ARGHEAD;
00080     if ( x < term ) return(1);
00081     next = term + *term;
00082     while ( x >= next ) { term = next; next += *next; }
00083     MakeDirty(term,x,0);
00084     return(1);
00085 }
00086
00087 /*
00088     #[ MakeDirty :

```

```

00089      #] MarkDirty :
00090
00091      Routine marks all functions dirty with the given flags.
00092      Is to be used when there is a possibility that symmetrization
00093      properties of functions may have changed. In that case we play
00094      it safe.
00095  */
00096
00097 void MarkDirty(WORD *term, WORD flags)
00098 {
00099     WORD *t, *r, *m, *tstop;
00100     GETSTOP(term,tstop);
00101     t = term+1;
00102     while ( t < tstop ) {
00103         if ( *t < FUNCTION ) { t += t[1]; continue; }
00104         t[2] |= flags;
00105         if ( *t < FUNCTION+WILDOFFSET && functions[*t-FUNCTION].spec > 0 ) {
00106             t += t[1]; continue;
00107         }
00108         if ( *t >= FUNCTION+WILDOFFSET && functions[*t-FUNCTION-WILDOFFSET].spec > 0 ) {
00109             t += t[1]; continue;
00110         }
00111         r = t + FUNHEAD;
00112         t += t[1];
00113         while ( r < t ) {
00114             if ( *r <= 0 ) {
00115                 if ( *r <= -FUNCTION ) r++;
00116                 else r += 2;
00117                 continue;
00118             }
00119             r[1] |= DIRTYFLAG;
00120             m = r + ARGHEAD;
00121             r += *r;
00122             while ( m < r ) {
00123                 MarkDirty(m,flags);
00124                 m += *m;
00125             }
00126         }
00127     }
00128 }
00129
00130 /*
00131      #] MarkDirty :
00132      #] PolyFunDirty :
00133
00134      Routine marks the PolyFun or the PolyRatFun dirty.
00135      This is used when there is modular calculus and the modulus
00136      has changed for the current module.
00137  */
00138
00139 void PolyFunDirty(PHEAD WORD *term)
00140 {
00141     GETBIDENTITY
00142     WORD *t, *tstop, *endarg;
00143     tstop = term + *term;
00144     tstop -= ABS(tstop[-1]);
00145     t = term+1;
00146     while ( t < tstop ) {
00147         if ( *t == AR.PolyFun ) {
00148             if ( AR.PolyFunType == 2 ) t[2] |= MUSTCLEANPRF;
00149             endarg = t + t[1];
00150             t[2] |= DIRTYFLAG;
00151             t += FUNHEAD;
00152             while ( t < endarg ) {
00153                 if ( *t > 0 ) {
00154                     t[1] |= DIRTYFLAG;
00155                 }
00156                 NEXTARG(t);
00157             }
00158         }
00159         else {
00160             t += t[1];
00161         }
00162     }
00163 }
00164
00165 /*
00166      #] PolyFunDirty :
00167      #] PolyFunClean :
00168
00169      Routine marks the PolyFun or the PolyRatFun clean.
00170      This is used when there is modular calculus and the modulus
00171      has changed for the current module.
00172  */
00173
00174 void PolyFunClean(PHEAD WORD *term)
00175 {

```



```

00176     GETBIDENTITY
00177     WORD *t, *tstop;
00178     tstop = term + *term;
00179     tstop -= ABS(tstop[-1]);
00180     t = term+1;
00181     while ( t < tstop ) {
00182         if ( *t == AR.PolyFun ) {
00183             t[2] &= ~MUSTCLEANPRF;
00184         }
00185         t += t[1];
00186     }
00187 }
00188
00189 /*
00190     #] PolyFunClean :
00191     #[ Symmetrize :
00192
00193     (Anti)Symmetrizes the arguments of a function.
00194     Nlist tells of how many arguments are involved.
00195     Nlist == 0      All arguments must be sorted.
00196     Nlist > 0      Arguments mentioned are to be sorted, rest skipped.
00197     type = SYMMETRIC      Full symmetrization
00198     type = ANTISYMMETRIC: Full symmetrization
00199     type = CYCLESYMMETRIC: Cyclic
00200     type = RCYCLESYMMETRIC: Cyclic or reverse
00201     Return value: OR of:
00202         0 even, 1 odd
00203         2 equal groups
00204         4 there was a permutation.
00205
00206     The information in Lijst tells what grouping is to be applied.
00207     The information is:
00208     ngroups number of groups
00209     gsize size of groups
00210     Lijst[0].... The groups.
00211 */
00212
00213 WORD Symmetrize(PHEAD WORD *func, WORD *Lijst, WORD ngroups, WORD gsize,
00214                WORD type)
00215 {
00216     GETBIDENTITY
00217     WORD **args,**arg,nargs;
00218     WORD *to, *r, *fstop;
00219     WORD i, j, k, ff, exch, nexch, neq;
00220     WORD *a1, *a2, *a3;
00221     WORD reverseorder;
00222     if ( ( type & REVERSEORDER ) != 0 ) reverseorder = -1;
00223     else reverseorder = 1;
00224     type &= ~REVERSEORDER;
00225
00226     ff = ( *func > FUNCTION ) ? functions[*func-FUNCTION].spec: 0;
00227
00228     if ( 2*func[1] > AN.arglistsize ) {
00229         if ( AN.arglist ) M_free(AN.arglist,"Symmetrize");
00230         AN.arglistsize = 2*func[1] + 8;
00231         AN.arglist = (WORD **)Malloca(AN.arglistsize*sizeof(WORD *),"Symmetrize");
00232     }
00233     arg = args = AN.arglist;
00234     to = AT.WorkPointer;
00235     r = func;
00236     fstop = r + r[1];
00237     r += FUNHEAD;
00238     nargs = 0;
00239     while ( r < fstop ) { /* Make list of arguments */
00240         *arg++ = r;
00241         nargs++;
00242         if ( ff ) {
00243             if ( *r == FUNNYWILD ) r++;
00244             r++;
00245         }
00246         else { NEXTARG(r); }
00247     }
00248     exch = 0;
00249     nexch = 0;
00250     neq = 0;
00251     a1 = Lijst;
00252     if ( type == SYMMETRIC || type == ANTISYMMETRIC ) {
00253         for ( i = 1; i < ngroups; i++ ) {
00254             a3 = a2 = a1 + gsize;
00255             k = reverseorder*CompGroup(BHEAD ff,args,a1,a2,gsize);
00256             if ( k < 0 ) {
00257                 j = i-1;
00258                 for(;;) {
00259                     for ( k = 0; k < gsize; k++ ) {
00260                         r = args[a1[k]]; args[a1[k]] = args[a2[k]]; args[a2[k]] = r;
00261                     }
00262                     exch ^= 1;

```

```

00263         nexch = 4;
00264         if ( j <= 0 ) break;
00265         a1 -= gsize;
00266         a2 -= gsize;
00267         k = reverseorder*CompGroup(BHEAD ff,args,a1,a2,gszsize);
00268         if ( k == 0 ) neq = 2;
00269         if ( k >= 0 ) break;
00270         j--;
00271     }
00272 }
00273 else if ( k == 0 ) neq = 2;
00274 a1 = a3;
00275 }
00276 }
00277 else if ( type == CYCLESYMMETRIC || type == RCYCLESYMMETRIC ) {
00278     WORD rev = 0, jmin = 0, ii, iimin;
00279 recycle:
00280     for ( j = 1; j < ngroups; j++ ) {
00281         for ( i = 0; i < ngroups; i++ ) {
00282             iimin = jmin + i;
00283             if ( iimin >= ngroups ) iimin -= ngroups;
00284             ii = j + i;
00285             if ( ii >= ngroups ) ii -= ngroups;
00286             k = reverseorder*CompGroup(BHEAD ff,args,Lijst+gszsize*iimin,Lijst+gszsize*ii,gszsize);
00287             if ( k > 0 ) break;
00288             if ( k < 0 ) { jmin = j; nexch = 4; break; }
00289         }
00290     }
00291     if ( type == RCYCLESYMMETRIC && rev == 0 && ngroups > 1 ) {
00292         for ( j = 0; j < ngroups; j++ ) {
00293             for ( i = 0; i < ngroups; i++ ) {
00294                 iimin = jmin + i;
00295                 if ( iimin >= ngroups ) iimin -= ngroups;
00296                 ii = j - i;
00297                 if ( ii < 0 ) ii += ngroups;
00298                 k = reverseorder*CompGroup(BHEAD ff,args,Lijst+gszsize*iimin,Lijst+gszsize*ii,gszsize);
00299                 if ( k > 0 ) break;
00300                 if ( k < 0 ) {
00301                     nexch = 4;
00302                     jmin = 0;
00303                     a1 = Lijst;
00304                     a2 = Lijst + gsize * (ngroups-1);
00305                     while ( a2 > a1 ) {
00306                         for ( k = 0; k < gsize; k++ ) {
00307                             r = args[a1[k]];
00308                             args[a1[k]] = args[a2[k]];
00309                             args[a2[k]] = r;
00310                         }
00311                         a1 += gsize; a2 -= gsize;
00312                     }
00313                     rev = 1;
00314                     goto recycle;
00315                 }
00316             }
00317         }
00318     }
00319     if ( jmin != 0 ) {
00320         arg = AN.arglist + func[1];
00321         a1 = Lijst + gsize * jmin;
00322         k = gsize * ngroups;
00323         a2 = Lijst + k;
00324         for ( i = 0; i < k; i++ ) {
00325             if ( a1 >= a2 ) a1 = Lijst;
00326             *arg++ = args[*a1++];
00327         }
00328         arg = AN.arglist + func[1];
00329         a1 = Lijst;
00330         for ( i = 0; i < k; i++ ) args[*a1++] = *arg++;
00331     }
00332 }
00333 r = func;
00334 i = FUNHEAD;
00335 NCOPY(to,r,i);
00336 for ( i = 0; i < nargs; i++ ) {
00337     if ( ff ) {
00338         if ( *(args[i]) == FUNNYWILD ) {
00339             *to++ = *(args[i]);
00340             *to++ = args[i][1];
00341         }
00342         else *to++ = *(args[i]);
00343     }
00344     else if ( ( j = *args[i] ) < 0 ) {
00345         *to++ = j;
00346         if ( j > -FUNCTION ) *to++ = args[i][1];
00347     }
00348     else {
00349         r = args[i];

```

```

00350         NCOPY(to,r,j);
00351     }
00352 }
00353 i = func[l];
00354 to = func;
00355 r = AT.WorkPointer;
00356 NCOPY(to,r,i);
00357 return ( exch | nexch | neq );
00358 }
00359
00360 /*
00361     #] Symmetrize :
00362     #[ CompGroup :
00363
00364     Routine compares two groups of arguments
00365     The arguments are in args[a1[i]] and args[a2[i]]
00366     for i = 0 to num
00367     type indicates the type of function.
00368     return value: -1 if there should be an exchange
00369     0 if they are equal
00370     1 if they are OK.
00371 */
00372
00373 int CompGroup(PHEAD WORD type, WORD **args, WORD *a1, WORD *a2, WORD num)
00374 {
00375     GETBIDENTITY
00376     WORD *t1, *t2, i1, i2, n, k;
00377
00378     for ( n = 0; n < num; n++ ) {
00379         t1 = args[a1[n]]; t2 = args[a2[n]];
00380         if ( type >= TENSORFUNCTION ) {
00381             if ( AR.Eside == LHSIDE || AR.Eside == LHSIDEX ) {
00382                 if ( *t1 == FUNNYWILD ) {
00383                     if ( *t2 == FUNNYWILD ) {
00384                         if ( t1[1] < t2[1] ) return(1);
00385                         if ( t1[1] > t2[1] ) return(-1);
00386                     }
00387                     return(-1);
00388                 }
00389                 else if ( *t2 == FUNNYWILD ) {
00390                     return(1);
00391                 }
00392                 else {
00393                     if ( *t1 < *t2 ) return(1);
00394                     if ( *t1 > *t2 ) return(-1);
00395                 }
00396             }
00397             else {
00398                 if ( *t1 < *t2 ) return(1);
00399                 if ( *t1 > *t2 ) return(-1);
00400             }
00401         }
00402         else if ( type == 0 ) {
00403             if ( AC.properorderflag ) {
00404                 k = CompArg(t1,t2);
00405                 if ( k < 0 ) return(1);
00406                 if ( k > 0 ) return(-1);
00407                 NEXTARG(t1)
00408                 NEXTARG(t2)
00409             }
00410             else {
00411                 if ( *t1 > 0 ) {
00412                     i1 = *t1 - ARGHEAD - 1;
00413                     t1 += ARGHEAD + 1;
00414                     if ( *t2 > 0 ) {
00415                         i2 = *t2 - ARGHEAD - 1;
00416                         t2 += ARGHEAD + 1;
00417                         while ( i1 > 0 && i2 > 0 ) {
00418                             if ( *t1 > *t2 ) return(-1);
00419                             else if ( *t1 < *t2 ) return(1);
00420                             i1--; i2--; t1++; t2++;
00421                         }
00422                         if ( i1 > 0 ) return(-1);
00423                         else if ( i2 > 0 ) return(1);
00424                     }
00425                 }
00426                 /*
00427                 This seems to be a bug. Reported by Aneesh Monahar, 28-sep-2005
00428                 else return(1);
00429                 */
00430                 else return(-1);
00431             }
00432         }
00433         else if ( *t2 > 0 ) return(1);
00434         else {
00435             if ( *t1 != *t2 ) {
00436                 if ( *t1 <= -FUNCTION && *t2 <= -FUNCTION ) {
00437                     if ( *t1 < *t2 ) return(-1);
00438                     return(1);
00439                 }

```

```

00437         }
00438         else {
00439             if ( *t1 < *t2 ) return(1);
00440             return(-1);
00441         }
00442     }
00443     if ( *t1 > -FUNCTION ) {
00444         if ( t1[1] != t2[1] ) {
00445             if ( t1[1] < t2[1] ) return(1);
00446             return(-1);
00447         }
00448     }
00449 }
00450 }
00451 }
00452 }
00453 return(0);
00454 }
00455
00456 /*
00457     #] CompGroup :
00458     #[ FullSymmetrize :
00459
00460     Relay function for Normalize to execute a full symmetrization
00461     of a function fun. It hooks into Symmetrize according to the
00462     calling conventions for it.
00463     type = 0: Symmetrize
00464     type = 1: AntiSymmetrize
00465     type = 2: CycleSymmetrize
00466     type = 3: RCycleSymmetrize
00467     Return values:
00468     bit 0: odd permutation
00469     bit 1: identical arguments
00470     bit 2: there was a permutation.
00471 */
00472
00473 int FullSymmetrize(PHEAD WORD *fun, int type)
00474 {
00475     GETBIDENTITY
00476     WORD *Lijst, count = 0;
00477     WORD *t, *funstop, i;
00478     int retval;
00479
00480     if ( functions[*fun-FUNCTION].spec > 0 ) {
00481         count = fun[1] - FUNHEAD;
00482         for ( i = fun[1]-1; i >= FUNHEAD; i-- ) {
00483             if ( fun[i] == FUNNYWILD ) count--;
00484         }
00485     }
00486     else {
00487         funstop = fun + fun[1];
00488         t = fun + FUNHEAD;
00489         while ( t < funstop ) { count++; NEXTARG(t) }
00490     }
00491     if ( count < 2 ) {
00492         fun[2] &= ~DIRTYSYMFLAG;
00493         return(0);
00494     }
00495     Lijst = AT.WorkPointer;
00496     for ( i = 0; i < count; i++ ) Lijst[i] = i;
00497     AT.WorkPointer += count;
00498     retval = Symmetrize(BHEAD fun, Lijst, count, 1, type);
00499     fun[2] &= ~DIRTYSYMFLAG;
00500     AT.WorkPointer = Lijst;
00501     return(retval);
00502 }
00503
00504 /*
00505     #] FullSymmetrize :
00506     #[ SymGen :
00507
00508     Routine does the outer work in the symmetrization.
00509     It locates the function(s) and loads up the parameters.
00510     It also studies the result.
00511
00512     if params[4] = -1 and no extra -> all
00513         extra -> strip groups with elements too large
00514         0 -> if group with element too large: nofun
00515         >0 -> must have right number of arguments
00516 */
00517
00518 int SymGen(PHEAD WORD *term, WORD *params, WORD num, WORD level)
00519 {
00520     GETBIDENTITY
00521     WORD *t, *r, *m;
00522     WORD i, j, k, c1, c2, ngroup;
00523     WORD *rstop, Nlist, *inLijst, *Lijst, sign = 1, sumch = 0, count;

```

```

00524     DUMMYUSE(num);
00525     c1 = params[3];          /* function number */
00526     c2 = FUNCTION + WILDOFFSET;
00527     Nlist = params[4];
00528     if ( Nlist < 0 ) Nlist = 0;
00529     else Nlist = params[0] - 7;
00530     t = term;
00531     m = t + *t;
00532     m -= ABS(m[-1]);
00533     t++;
00534     while ( t < m ) {
00535         if ( *t == c1 || c1 > c2 ) {      /* Candidate function */
00536             if ( *t >= FUNCTION && functions[*t-FUNCTION].spec
00537                 >= TENSORFUNCTION ) {
00538                 count = t[1] - FUNHEAD;
00539             }
00540             else {
00541                 count = 0;
00542                 r = t;
00543                 rstop = t + t[1];
00544                 r += FUNHEAD;
00545                 while ( r < rstop ) { count++; NEXTARG(r) }
00546             }
00547             if ( ( j = params[4] ) > 0 && j != count ) goto NextFun;
00548             if ( j == 0 ) {
00549                 inLijst = params+7;
00550                 for ( i = 0; i < Nlist; i++ )
00551                     if ( inLijst[i] > count-1 ) goto NextFun;
00552             }
00553
00554             if ( Nlist > (params[0] - 7) ) Nlist = params[0] - 7;
00555             Lijst = AT.WorkPointer;
00556             inLijst = params + 7;
00557             ngroup = params[5];
00558             if ( Nlist > 0 && j < 0 ) {
00559                 k = 0;
00560                 for ( i = 0; i < ngroup; i++ ) {
00561                     for ( j = 0; j < params[6]; j++ ) {
00562                         if ( inLijst[j] > count+1 ) {
00563                             inLijst += params[6];
00564                             goto NextGroup;
00565                         }
00566                     }
00567                     j = params[6];
00568                     NCOPY(Lijst,inLijst,j);
00569                     k++;
00570 NextGroup:;
00571                 }
00572                 if ( k <= 1 ) goto NextFun;
00573                 ngroup = k;
00574                 inLijst = AT.WorkPointer;
00575                 AT.WorkPointer = Lijst;
00576                 Lijst = inLijst;
00577             }
00578             else if ( Nlist == 0 ) {
00579                 for ( i = 0; i < count; i++ ) Lijst[i] = i;
00580                 AT.WorkPointer += count;
00581                 ngroup = count;
00582             }
00583             else {
00584                 for ( i = 0; i < Nlist; i++ ) Lijst[i] = inLijst[i];
00585                 AT.WorkPointer += Nlist;
00586             }
00587             j = Symmetrize(BHEAD t,Lijst,ngroup,params[6],params[2]);
00588             AT.WorkPointer = Lijst;
00589             if ( params[2] == 4 ) { /* antisymmetric */
00590                 if ( ( j & 1 ) != 0 ) sign = -sign;
00591                 if ( ( j & 2 ) != 0 ) return(0); /* equal arguments */
00592             }
00593             if ( ( j & 4 ) != 0 ) sumch++;
00594             t[2] &= ~DIRTYSYMFLAG;
00595         }
00596 NextFun:
00597         t += t[1];
00598     }
00599     if ( sign < 0 ) {
00600         t = term;
00601         t += *t - 1;
00602         *t = -*t;
00603     }
00604     if ( sumch ) {
00605         if ( Normalize(BHEAD term) ) {
00606             MLOCK(ErrorMessageLock);
00607             MesCall("SymGen");
00608             MUNLOCK(ErrorMessageLock);
00609             return(-1);
00610         }

```

```

00611         if ( !*term ) return(0);
00612         *AN.RepPoint = 1;
00613         AR.expchanged = 1;
00614         if ( AR.CurDum > AM.IndDum && AR.sLevel <= 0 ) ReNumber(BHEAD term);
00615     }
00616     return(Generator(BHEAD term,level));
00617 }
00618
00619 /*
00620     #] SymGen :
00621     #[ SymFind :
00622
00623     There is a certain amount of double work here, as this routine
00624     finds the function to be treated, while the SymGen routine has
00625     to find it again. Note however that this way things remain
00626     uniform and simple. Moreover this avoids problems with actions
00627     on more than one function simultaneously.
00628     Output in AT.TMout:
00629     Number,sym/anti,fun,lenpar,ngroups,gsize,fields
00630 */
00631
00632 int SymFind(PHEAD WORD *term, WORD *params)
00633 {
00634     GETBIDENTITY
00635     WORD *t, *r, *m;
00636     WORD j, c1, c2, count;
00637     WORD *rstop;
00638     c1 = params[4]; /* function number */
00639     c2 = FUNCTION + WILDOFFSET;
00640     t = term;
00641     m = t + *t;
00642     m -= ABS(m[-1]);
00643     t++;
00644     while ( t < m ) {
00645         if ( *t == c1 || c1 > c2 ) { /* Candidate function */
00646             if ( *t >= FUNCTION && functions[*t-FUNCTION].spec
00647                 >= TENSORFUNCTION ) { count = t[1] - FUNHEAD; }
00648             else {
00649                 count = 0;
00650                 r = t;
00651                 rstop = t + t[1];
00652                 r += FUNHEAD;
00653                 while ( r < rstop ) { count++; NEXTARG(r) }
00654             }
00655             if ( ( j = params[5] ) > 0 && j != count ) goto NextFun;
00656             if ( j == 0 ) {
00657                 r = params + 8;
00658                 rstop = params + params[1];
00659                 while ( r < rstop ) {
00660                     if ( *r > count + 1 ) goto NextFun;
00661                     r++;
00662                 }
00663             }
00664             t = AT.TMout;
00665             r = params;
00666             j = r[1] - 1;
00667             *t++ = j;
00668             *t++ = SYMMETRIZE;
00669             r += 3;
00670             j--;
00671             NCOPY(t,r,j);
00672             return(1);
00673         }
00674     }
00675     NextFun:
00676     t += t[1];
00677     }
00678     return(0);
00679 }
00680
00681 /*
00682     #] SymFind :
00683     #[ ChainIn :
00684
00685     Equivalent to repeat id f(?a)*f(?b) = f(?a,?b);
00686
00687     This one always takes less space.
00688 */
00689
00690 int ChainIn(PHEAD WORD *term, WORD funnum)
00691 {
00692     GETBIDENTITY
00693     WORD *t, *tend, *m, *tt, *ts;
00694     int action, normFlag = 0;
00695     if ( funnum < 0 ) { /* Dollar to be expanded */
00696         funnum = DolToFunction(BHEAD -funnum);
00697     }

```

```

00698         if ( AN.ErrorInDollar || funnum <= 0 ) {
00699             MLOCK(ErrorMessageLock);
00700             MesPrint("Dollar variable does not evaluate to function in ChainIn statement");
00701             MUNLOCK(ErrorMessageLock);
00702             return(-1);
00703         }
00704     }
00705     do {
00706         action = 0;
00707         tend = term+*term;
00708         tend -= ABS(tend[-1]);
00709         t = term+1;
00710         while ( t < tend ) {
00711             if ( *t != funnum ) { t += t[1]; continue; }
00712             m = t;
00713             t += t[1];
00714             tt = t;
00715             if ( t >= tend || *t != funnum ) continue;
00716             action = 1;
00717             normFlag = 1;
00718             while ( t < tend && *t == funnum ) {
00719                 ts = t + t[1];
00720                 t += FUNHEAD;
00721                 while ( t < ts ) *tt++ = *t++;
00722             }
00723             m[1] = tt - m;
00724             ts = term + *term;
00725             while ( t < ts ) *tt++ = *t++;
00726             *term = tt - term;
00727             break;
00728         }
00729     } while ( action );
00730
00731     if ( normFlag ) {
00732         /* We need to check the newly-constructed arguments w.r.t symmetry properties */
00733         MarkDirty(term, DIRTSYMFFLAG);
00734         AT.WorkPointer = term + *term;
00735         Normalize(BHEAD term);
00736     }
00737
00738     return(0);
00739 }
00740
00741 /*
00742     #] ChainIn :
00743     #[ ChainOut :
00744
00745     Equivalent to repeat id f(x1?,x2?,?a) = f(x1)*f(x2,?a);
00746 */
00747
00748 int ChainOut(PHEAD WORD *term, WORD funnum)
00749 {
00750     GETBIDENTITY
00751     WORD *t, *tend, *tt, *ts, *w, *ws;
00752     int flag = 0, i;
00753     if ( funnum < 0 ) { /* Dollar to be expanded */
00754         funnum = DolToFunction(BHEAD -funnum);
00755         if ( AN.ErrorInDollar || funnum <= 0 ) {
00756             MLOCK(ErrorMessageLock);
00757             MesPrint("Dollar variable does not evaluate to function in ChainOut statement");
00758             MUNLOCK(ErrorMessageLock);
00759             return(-1);
00760         }
00761     }
00762     tend = term+*term;
00763     if ( AT.WorkPointer < tend ) AT.WorkPointer = tend;
00764     tend -= ABS(tend[-1]);
00765     t = term+1; tt = term; w = AT.WorkPointer;
00766     while ( t < tend ) {
00767         if ( *t != funnum || t[1] == FUNHEAD ) { t += t[1]; continue; }
00768         flag = 1;
00769         while ( tt < t ) *w++ = *tt++;
00770         ts = t + t[1];
00771         t += FUNHEAD;
00772         while ( t < ts ) {
00773             ws = w;
00774             for ( i = 0; i < FUNHEAD; i++ ) *w++ = tt[i];
00775             if ( functions[*tt-FUNCTION].spec >= TENSORFUNCTION ) {
00776                 *w++ = *tt++;
00777             }
00778             else if ( *t < 0 ) {
00779                 if ( *t <= -FUNCTION ) *w++ = *tt++;
00780                 else { *w++ = *t++; *w++ = *t++; }
00781             }
00782             else {
00783                 i = *t; NCOPY(w,t,i);
00784             }

```

```

00785         ws[l] = w - ws;
00786     }
00787     tt = t;
00788 }
00789 if ( flag == 1 ) {
00790     ts = term + *term;
00791     while ( tt < ts ) *w++ = *tt++;
00792     *AT.WorkPointer = w - AT.WorkPointer;
00793     t = term; w = AT.WorkPointer; i = *w;
00794     NCOPY(t,w,i)
00795     AT.WorkPointer = term + *term;
00796     Normalize(BHEAD term);
00797 }
00798 return(0);
00799 }
00800
00801 /*
00802     #] ChainOut :
00803     #] Utilities :
00804     #] Patterns :
00805         #[] MatchFunction :          WORD MatchFunction(pattern,interm,wilds)
00806
00807         The routine assumes that the function numbers are the same.
00808         The contents are compared and a possible wildcard assignment
00809         is made. Note that it may be necessary to use a wildcard
00810         assignment stack to do things right.
00811         The routine can become arbitrarily complicated as there is
00812         no end to the possible wilddarding.
00813         Examples:
00814         - a: No wilddarding -> straight match
00815         - b: Individual arguments (object -> object)
00816         - c: whole arguments (object to subexpression)
00817         - d: any argumentlist
00818         - e: part of an argument (object inside subexpression)
00819
00820         The ones with a minus sign in front have been implemented.
00821
00822         Note: the argument wilds allows backtracking when multiple
00823         ?a,?b give a match that later turns out to be useless.
00824 */
00825
00826 int MatchFunction(PHEAD WORD *pattern, WORD *interm, WORD *wilds)
00827 {
00828     GETBIDENTITY
00829     WORD *m, *t, *r, i;
00830     WORD *mstop = 0, *tstop = 0;
00831     WORD *argmstop, *argtstop;
00832     WORD *mtrmstop, *ttrmstop;
00833     WORD *msubstop, *mnxtsub;
00834     WORD msizcoef, mcount, tcount, newvalue, j;
00835     WORD *oldm, *oldt;
00836     WORD *OldWork, numofwildarg;
00837     WORD nwstore, tobeaten, reservevalue = 0, resernum = 0, withwild;
00838     WORD *wildargtaken;
00839     CBUF *C = cbuf+AT.ebufnum;
00840     int ntw = AN.NumTotWildArgs;
00841     LONG oldcpinter = C->Pointer - C->Buffer;
00842 #ifdef WITHFLOAT
00843     // Pattern matching against float_ functions is currently disabled.
00844     // To relax this in the future, move this early return down to where gamma
00845     // functions and tensors are handled specially.
00846     if ( *interm == FLOATFUN ) return(0);
00847 #endif
00848 /*
00849     Test first for a straight match
00850 */
00851     AN.RepFunList[AN.RepFunNum+1] = 0;
00852     if ( *wilds == 0 ) {
00853         m = pattern; t = interm;
00854
00855         if ( *m != *t ) {
00856             if ( *m < (FUNCTION + WILDOFFSET) ) return(0);
00857             if ( *t < FUNCTION ) return(0);
00858             if ( functions[*t-FUNCTION].spec !=
00859                 functions[*m-FUNCTION-WILDOFFSET].spec ) return(0);
00860         }
00861         i = m[1];
00862         if ( *m >= (FUNCTION + WILDOFFSET) ) { i--; m++; t++; }
00863         do { if ( *m++ != *t++ ) break; } while ( --i > 0 );
00864         if ( i <= 0 ) { /* Arguments match */
00865             if ( AN.SignCheck && AN.ExpectedSign ) return(0);
00866             i = *pattern - WILDOFFSET;
00867             if ( i >= FUNCTION ) {
00868                 if ( *interm != GAMMA
00869                     && !CheckWild(BHEAD i,FUNTOFUN,*interm,&newvalue) ) {
00870                     AddWild(BHEAD i,FUNTOFUN,newvalue);
00871                     return(1);

```



```

00872         }
00873         return(0);
00874     }
00875     else return(1);
00876 }
00877 }
00878 /*
00879  Store the current Wildcard assignments
00880 */
00881 t = wildargtaken = OldWork = AT.WorkPointer;
00882 t += ntw;
00883 m = AN.WildValue;
00884 nwstore = i = (m[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
00885 if ( i > 0 ) {
00886     r = AT.WildMask;
00887     do {
00888         *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
00889     } while ( --i > 0 );
00890     *t++ = C->numrhs;
00891 }
00892 if ( t >= AT.WorkTop ) {
00893     MLOCK(ErrorMessageLock);
00894     MesWork();
00895     MUNLOCK(ErrorMessageLock);
00896     Terminate(-1);
00897 }
00898 AT.WorkPointer = t;
00899
00900 if ( *wilds ) {
00901     if ( *wilds == 1 ) goto endloop;
00902     else goto enloop;          /* tensors = 2 */
00903 }
00904 m = pattern; t = interm;
00905 /*
00906 Single out the specials
00907 */
00908 if ( *t == GAMMA ) {
00909     /*
00910      #[ GAMMA :
00911
00912      For the gamma's we need to do two things:
00913      a: Find that there is a match
00914      b: Find where the match occurs in the string
00915      This last thing cannot be stored in the current conventions,
00916      but once the wildcard assignments have been made it is much
00917      easier to find it back.
00918      Alternative: replace the function number in the term temporarily
00919      by the offset in the string. This makes things maybe easier.
00920     */
00921     if ( *m != GAMMA ) goto NoCaseB;
00922     i = t[1] - m[1];
00923     if ( m[1] == FUNHEAD+1 ) {
00924         if ( i ) goto NoCaseB;
00925         if ( m[FUNHEAD] < (AM.OffsetIndex+WILDOFFSET) ||
00926             t[FUNHEAD] >= (AM.OffsetIndex+WILDOFFSET) ) goto NoCaseB;
00927
00928         if ( CheckWild(BHEAD m[FUNHEAD]-WILDOFFSET,INDTOIND,t[FUNHEAD],&newvalue) ) goto NoCaseB;
00929         AddWild(BHEAD m[FUNHEAD]-WILDOFFSET,INDTOIND,newvalue);
00930
00931         AT.WorkPointer = OldWork;
00932         if ( AN.SignCheck && AN.ExpectedSign ) return(0);
00933         return(1);          /* m was eaten. we have a match! */
00934     }
00935     if ( i < 0 ) goto NoCaseB; /* Pattern longer than target */
00936     mstop = m + m[1];
00937     tstop = t + t[1];
00938     m += FUNHEAD; t += FUNHEAD;
00939     if ( *m >= (AM.OffsetIndex+WILDOFFSET) && *t < (AM.OffsetIndex+WILDOFFSET) ) {
00940         if ( CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,*t,&newvalue) ) goto NoCaseB;
00941         reservevalue = newvalue;
00942         withwild = 1;
00943         resernum = *m-WILDOFFSET;
00944         AddWild(BHEAD *m-WILDOFFSET,INDTOIND,newvalue);
00945     }
00946     else if ( *m != *t ) goto NoCaseB;
00947     else withwild = 0;
00948     m++; t++;
00949     oldm = m; argtstop = oldt = t;
00950     j = 0;          /* No wildcard assignments yet */
00951     while ( i >= 0 ) {
00952         if ( *m == *t ) {
00953             WithGamma: m++; t++;
00954             if ( m >= mstop ) {
00955                 if ( t < tstop && mstop < AN.patstop ) {
00956                     WORD k;
00957                     mnextsub = pattern + pattern[1];
00958                     k = *mnextsub;

```

```

00959         while ( k == GAMMA && mnextsub[FUNHEAD]
00960             != pattern[FUNHEAD] ) {
00961             mnextsub += mnextsub[1];
00962             if ( mnextsub >= AN.patstop ) goto FullOK;
00963             k = *mnextsub;
00964         }
00965         if ( k >= FUNCTION ) {
00966             if ( k > (FUNCTION + WILDOFFSET) ) k -= WILDOFFSET;
00967             if ( functions[k-FUNCTION].commute ) goto NoGamma;
00968         }
00969     }
00970 FullOK:
00971     if ( AN.SignCheck && AN.ExpectedSign ) goto NoGamma;
00972     AN.RepFunList[AN.RepFunNum+1] = WORDDIF(olddt, argtstop);
00973     return(1);
00974     if ( t >= tstop ) goto NoCaseB;
00975 }
00976 else if ( *m >= (AM.OffsetIndex+WILDOFFSET)
00977 && *m < (AM.OffsetIndex + (WILDOFFSET<1)) && ( *t >= 0 ||
00978 *t < MINSPEC ) ) { /* Wildcard index */
00979     if ( !CheckWild(BHEAD *m-WILDOFFSET, INDTOIND, *t, &newvalue) ) {
00980         AddWild(BHEAD *m-WILDOFFSET, INDTOIND, newvalue);
00981         j = 1;
00982         goto WithGamma;
00983     }
00984     else goto NoGamma;
00985 }
00986 else if ( *m < MINSPEC && *m >= (AM.OffsetVector+WILDOFFSET)
00987 && *t < MINSPEC ) { /* Wildcard vector */
00988     if ( !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, *t, &newvalue) ) {
00989         AddWild(BHEAD *m-WILDOFFSET, VECTOVEC, newvalue);
00990         j = 1;
00991         goto WithGamma;
00992     }
00993     else goto NoGamma;
00994 }
00995 else {
00996 NoGamma:
00997     if ( j ) { /* Undo wildcards */
00998         m = AN.WildValue;
00999         t = OldWork + AN.NumTotWildArgs; r = AT.WildMask; j = nwstore;
01000         if ( j > 0 ) {
01001             do {
01002                 *m++ = *t++; *m++ = *t++;
01003                 *m++ = *t++; *m++ = *t++; *r++ = *t++;
01004             } while ( --j > 0 );
01005             C->numrhs = *t++;
01006             C->Pointer = C->Buffer + oldcpointer;
01007         }
01008         j = 0;
01009     }
01010     m = oldm; t = ++olddt; i--;
01011     if ( withwild ) {
01012         AddWild(BHEAD resernum, INDTOIND, reservevalue);
01013     }
01014 }
01015 }
01016 goto NoCaseB;
01017 /*
01018 #] GAMMA :
01019 #[ Tensors :
01020 */
01021 }
01022 else if ( *t >= FUNCTION && functions[*t-FUNCTION].spec >= TENSORFUNCTION ) {
01023     mstop = m + m[1];
01024     tstop = t + t[1];
01025     mcount = 0;
01026     m += FUNHEAD;
01027     t += FUNHEAD;
01028     AN.WildArgs = 0;
01029     tcount = WORDDIF(tstop, t);
01030     while ( m < mstop ) {
01031         if ( *m == FUNNYWILD ) { m++; AN.WildArgs++; }
01032         m++; mcount++;
01033     }
01034     tobeeaten = tcount - mcount + AN.WildArgs;
01035     if ( tobeeaten ) {
01036         if ( tobeeaten < 0 || AN.WildArgs == 0 ) {
01037             AT.WorkPointer = OldWork;
01038             return(0); /* Cannot match */
01039         }
01040     }
01041     AT.WildArgTaken[0] = AN.WildEat = tobeeaten;
01042     for ( i = 1; i < AN.WildArgs; i++ ) AT.WildArgTaken[i] = 0;
01043 toploop:
01044     numofwildarg = 0;
01045 }

```

```

01046     m = pattern; t = interm;
01047     mstop = m + m[1];
01048     if ( *m != *t ) {
01049         i = *m - WILDOFFSET;
01050         if ( CheckWild(BHEAD i,FUNTOFUN,*t,&newvalue) ) goto NoCaseB;
01051         AddWild(BHEAD i,FUNTOFUN,newvalue);
01052     }
01053     m += FUNHEAD;
01054     t += FUNHEAD;
01055     while ( m < mstop ) {
01056         /*
01057             First test for an exact match
01058         */
01059         if ( *m == *t ) { m++; t++; continue; }
01060         /*
01061             No exact match. Try ARGWILD
01062         */
01063         AN.argaddress = t;
01064         if ( *m == FUNNYWILD ) {
01065             tobeeaten = AT.WildArgTaken[numofwildarg++];
01066             if ( CheckWild(BHEAD m[1],ARGTOARG|EATTENSOR,tobeeaten,t) ) goto endloop;
01067             AddWild(BHEAD m[1],ARGTOARG|EATTENSOR,tobeeaten);
01068             m += 2;
01069             t += tobeeaten;
01070             continue;
01071         }
01072         /*
01073             Now the various cases:
01074         */
01075         i = *m;
01076         if ( i < MINSPEC ) {
01077             if ( *t != i ) {
01078                 if ( *t >= MINSPEC ) goto endloop;
01079                 i -= WILDOFFSET;
01080                 if ( i < AM.OffsetVector ) goto endloop;
01081                 if ( CheckWild(BHEAD i,VECTOVEC,*t,&newvalue) )
01082                     goto endloop;
01083                 AddWild(BHEAD i,VECTOVEC,newvalue);
01084             }
01085         }
01086         else if ( i >= AM.OffsetIndex ) { /* Index */
01087             if ( i < ( AM.OffsetIndex + WILDOFFSET ) ) goto endloop;
01088             if ( i >= ( AM.OffsetIndex + (WILDOFFSET<1) ) ) {
01089                 goto endloop; /* Summed over index */
01090                 /* For the moment */
01091             }
01092             i -= WILDOFFSET;
01093             if ( CheckWild(BHEAD i,INDTOIND,*t,&newvalue) )
01094                 goto endloop; /* Assignment not allowed */
01095             AddWild(BHEAD i,INDTOIND,newvalue);
01096         }
01097         else goto endloop;
01098         m++; t++;
01099     }
01100     if ( AN.SignCheck && AN.ExpectedSign ) goto endloop;
01101     AT.WorkPointer = OldWork;
01102     if ( AN.WildArgs > 1 ) *wilds = 2;
01103     return(1); /* m was eaten. we have a match! */
01104
01105 endloop:;
01106 /*
01107     restore the current Wildcard assignments
01108 */
01109     i = nwstore;
01110     if ( i > 0 ) {
01111         m = AN.WildValue;
01112         t = OldWork + ntw; r = AT.WildMask;
01113         do {
01114             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01115         } while ( --i > 0 );
01116         C->numrhs = *t++;
01117         C->Pointer = C->Buffer + oldcpointer;
01118     }
01119 endloop;;
01120     i = AN.WildArgs - 1;
01121     if ( i <= 0 ) {
01122         AT.WorkPointer = OldWork;
01123         return(0);
01124     }
01125     while ( --i >= 0 ) {
01126         if ( AT.WildArgTaken[i] == 0 ) {
01127             if ( i == 0 ) {
01128                 AT.WorkPointer = OldWork;
01129                 *wilds = 0;
01130                 return(0);
01131             }
01132         }
01133     }

```

```

01133         else {
01134             (AT.WildArgTaken[i])--;
01135             numofwildarg = 0;
01136             for ( j = 0; j <= i; j++ ) {
01137                 numofwildarg += AT.WildArgTaken[j];
01138             }
01139             AT.WildArgTaken[j] = AN.WildEat-numofwildarg;
01140             for ( j++; j < AN.WildArgs; j++ ) AT.WildArgTaken[j] = 0;
01141             break;
01142         }
01143     }
01144     goto toploop;
01145 /*
01146     #] Tensors :
01147 */
01148 }
01149 /*
01150 Count the number of arguments. Either equal or an argument wildcard.
01151 */
01152 mstop = m + m[1];
01153 tstop = t + t[1];
01154 mcount = 0; tcount = 0;
01155 m += FUNHEAD; t += FUNHEAD;
01156 while ( t < tstop ) { tcount++; NEXTARG(t) }
01157 AN.WildArgs = 0;
01158 while ( m < mstop ) {
01159     mcount++;
01160     if ( *m == -ARGWILD ) AN.WildArgs++;
01161     NEXTARG(m)
01162 }
01163 tobeeaten = tcount - mcount + AN.WildArgs;
01164 if ( tobeeaten ) {
01165     if ( tobeeaten < 0 || AN.WildArgs == 0 ) {
01166         AT.WorkPointer = OldWork;
01167         return(0); /* Cannot match */
01168     }
01169 }
01170 /*
01171 Set up the array AT.WildArgTaken for the number of arguments that each
01172 wildarg eats.
01173 */
01174 AT.WildArgTaken[0] = AN.WildEat = tobeeaten;
01175 for ( i = 1; i < AN.WildArgs; i++ ) AT.WildArgTaken[i] = 0;
01176 topofloop:
01177 numofwildarg = 0;
01178 /*
01179 Test for single wildcard object/argument
01180 */
01181 m = pattern; t = interm;
01182 if ( *m != *t ) {
01183     i = *m - WILDOFFSET;
01184     if ( CheckWild(BHEAD i,FUNTOFUN,*t,&newvalue) ) goto NoCaseB;
01185     AddWild(BHEAD i,FUNTOFUN,newvalue);
01186 }
01187 mstop = m + m[1];
01188 /* tstop = t + t[1]; */
01189 m += FUNHEAD;
01190 t += FUNHEAD;
01191 while ( m < mstop ) {
01192     argmstop = oldm = m;
01193     argtstop = oldt = t;
01194     NEXTARG(argmstop)
01195     NEXTARG(argtstop)
01196     if ( t == tstop ) { /* This concerns a very rare bug */
01197         if ( *m == -ARGWILD ) goto ArgAll;
01198         goto endofloop;
01199     }
01200     if ( *m < 0 && *t < 0 ) {
01201         if ( *t <= -FUNCTION ) {
01202             if ( *t == *m ) {}
01203             else if ( *m <= -FUNCTION-WILDOFFSET
01204                 && functions[-*t-FUNCTION].spec
01205                 == functions[-*m-FUNCTION-WILDOFFSET].spec ) {
01206                 i = -*m - WILDOFFSET;
01207                 if ( CheckWild(BHEAD i,FUNTOFUN,*t,&newvalue) ) goto endofloop;
01208                 AddWild(BHEAD i,FUNTOFUN,newvalue);
01209             }
01210             else if ( *m == -SYMBOL && m[1] >= 2*MAXPOWER ) {
01211                 i = m[1] - 2*MAXPOWER;
01212                 AN.argaddress = AT.FunArg;
01213                 AT.FunArg[ARGHEAD+1] = -*t;
01214                 if ( CheckWild(BHEAD i,SYMTOSUB,1,AN.argaddress) ) goto endofloop;
01215                 AddWild(BHEAD i,SYMTOSUB,0);
01216             }
01217             else if ( *m == -ARGWILD ) {
01218 ArgAll:
01219                 i = AT.WildArgTaken[numofwildarg++];
01220                 AN.argaddress = t;

```

```

01220         if ( CheckWild(BHEAD m[1],ARGTOARG,i,t) ) goto endofloop;
01221         AddWild(BHEAD m[1],ARGTOARG,i);
01222 /*         m += 2; */
01223         while ( --i >= 0 ) { NEXTARG(t) }
01224         argtstop = t;
01225     }
01226     else goto endofloop;
01227 }
01228 else if ( *t == *m ) {
01229     if ( t[1] == m[1] ) {}
01230     else if ( *t == -SYMBOL ) {
01231         j = SYMTOSYM;
01232 SymAll:
01233         if ( ( i = m[1] - 2*MAXPOWER ) < 0 ) goto endofloop;
01234         if ( CheckWild(BHEAD i,j,t[1],&newvalue) ) goto endofloop;
01235         AddWild(BHEAD i,j,newvalue);
01236     }
01237     else if ( *t == -INDEX ) {
01238 IndAll:
01239         i = m[1] - WILDOFFSET;
01240         if ( i < AM.OffsetIndex || i >= WILDOFFSET+AM.OffsetIndex )
01241             goto endofloop;
01242         /* We kill the summed over indices here */
01243         if ( CheckWild(BHEAD i,INDTOIND,t[1],&newvalue) ) goto endofloop;
01244         AddWild(BHEAD i,INDTOIND,newvalue);
01245     }
01246     else if ( *t == -VECTOR || *t == -MINVECTOR ) {
01247         i = m[1] - WILDOFFSET;
01248         if ( i < AM.OffsetVector ) goto endofloop;
01249         if ( CheckWild(BHEAD i,VECTOVEC,t[1],&newvalue) ) goto endofloop;
01250         AddWild(BHEAD i,VECTOVEC,newvalue);
01251     }
01252     else goto endofloop;
01253 }
01254 else if ( *m == -ARGWILD ) goto ArgAll;
01255 else if ( *m == -INDEX && m[1] >= AM.OffsetIndex+WILDOFFSET
01256 && m[1] < AM.OffsetIndex+(WILDOFFSET<1) ) {
01257     if ( *t == -VECTOR ) goto IndAll;
01258     if ( *t == -SNUMBER && t[1] >= 0 && t[1] < AM.OffsetIndex ) goto IndAll;
01259     if ( *t == -MINVECTOR ) {
01260         i = m[1] - WILDOFFSET;
01261         AN.argaddress = AT.MinVecArg;
01262         AT.MinVecArg[ARGHEAD+3] = t[1];
01263         if ( CheckWild(BHEAD i,INDTOSUB,1,AN.argaddress) ) goto endofloop;
01264         AddWild(BHEAD i,INDTOSUB,(WORD)0);
01265     }
01266     else goto endofloop;
01267 }
01268 else if ( *m == -SYMBOL && m[1] >= 2*MAXPOWER && *t == -SNUMBER ) {
01269     j = SYMTONUM;
01270     goto SymAll;
01271 }
01272 else if ( *m == -VECTOR && *t == -MINVECTOR &&
01273 ( i = m[1] - WILDOFFSET ) >= AM.OffsetVector ) {
01274 /*
01275 =====
01276     AN.argaddress = AT.MinVecArg;
01277     AT.MinVecArg[ARGHEAD+3] = t[1];
01278     if ( CheckWild(BHEAD i,VECTOSUB,1,AN.argaddress) ) goto endofloop;
01279     AddWild(BHEAD i,VECTOSUB,(WORD)0);
01280 =====
01281 */
01282     if ( CheckWild(BHEAD i,VECTOMIN,t[1],&newvalue) ) goto endofloop;
01283     AddWild(BHEAD i,VECTOMIN,newvalue);
01284 }
01285 else if ( *m == -MINVECTOR && *t == -VECTOR &&
01286 ( i = m[1] - WILDOFFSET ) >= AM.OffsetVector ) {
01287 /*
01288 =====
01289     AN.argaddress = AT.MinVecArg;
01290     AT.MinVecArg[ARGHEAD+3] = t[1];
01291     if ( CheckWild(BHEAD i,VECTOSUB,1,AN.argaddress) ) goto endofloop;
01292     AddWild(BHEAD i,VECTOSUB,(WORD)0);
01293 =====
01294 */
01295     if ( CheckWild(BHEAD i,VECTOMIN,t[1],&newvalue) ) goto endofloop;
01296     AddWild(BHEAD i,VECTOMIN,newvalue);
01297 }
01298     else goto endofloop;
01299 }
01300 else if ( *t <= -FUNCTION && *m > 0 ) {
01301     if ( ( m[ARGHEAD]+ARGHEAD == *m ) && m[*m-1] == 3
01302 && m[*m-2] == 1 && m[*m-3] == 1 && m[ARGHEAD+1] >= FUNCTION
01303 && m[ARGHEAD+2] == *m-ARGHEAD-4 ) { /* Check for f(?a) etc */
01304         WORD *mmmst, *mmm;
01305         if ( m[ARGHEAD+1] >= FUNCTION+WILDOFFSET ) {
01306 /*             i = *m - WILDOFFSET; */

```

```

01307         i = m[ARGHEAD+1] - WILDOFFSET;
01308         if ( CheckWild(BHEAD i,FUNTOFUN,-*t,&newvalue) ) goto endofloop;
01309         AddWild(BHEAD i,FUNTOFUN,newvalue);
01310     }
01311     else if ( m[ARGHEAD+1] != -*t ) goto endofloop;
01312 /*
01313         Only arguments allowed are ?a etc.
01314 */
01315     mmmst = m+*m-3;
01316     mmm = m + ARGHEAD + FUNHEAD + 1;
01317     while ( mmm < mmmst ) {
01318         if ( *mmm != -ARGWILD ) goto endofloop;
01319         i = 0;
01320         AN.argaddress = t;
01321         if ( CheckWild(BHEAD mmm[1],ARGTOARG,i,t) ) goto endofloop;
01322         AddWild(BHEAD mmm[1],ARGTOARG,i);
01323         mmm += 2;
01324     }
01325 }
01326 else goto endofloop;
01327 }
01328 else if ( *m < 0 && *t > 0 ) {
01329     if ( *m == -SYMBOL ) { /* SYMTOSUB */
01330         if ( m[1] < 2*MAXPOWER ) goto endofloop;
01331         i = m[1] - 2*MAXPOWER;
01332         AN.argaddress = t;
01333         if ( CheckWild(BHEAD i,SYMTOSUB,1,AN.argaddress) ) goto endofloop;
01334         AddWild(BHEAD i,SYMTOSUB,0);
01335     }
01336     else if ( *m == -VECTOR ) {
01337         if ( ( i = m[1] - WILDOFFSET ) < AM.OffsetVector )
01338             goto endofloop;
01339         AN.argaddress = t;
01340         if ( CheckWild(BHEAD i,VECTOSUB,1,t) ) goto endofloop;
01341         AddWild(BHEAD i,VECTOSUB,(WORD)0);
01342     }
01343     else if ( *m == -INDEX ) {
01344         if ( ( i = m[1] - WILDOFFSET ) < AM.OffsetIndex ) goto endofloop;
01345         if ( i >= AM.OffsetIndex + WILDOFFSET ) goto endofloop;
01346         AN.argaddress = t;
01347         if ( CheckWild(BHEAD i,INDTOSUB,1,AN.argaddress) ) goto endofloop;
01348         AddWild(BHEAD i,INDTOSUB,(WORD)0);
01349     }
01350     else if ( *m == -ARGWILD ) goto ArgAll;
01351     else goto endofloop;
01352 }
01353 else if ( *m > 0 && *t > 0 ) {
01354     WORD ii = *t-*m;
01355     i = *m;
01356     do { if ( *m++ != *t++ ) break; } while ( --i > 0 );
01357     if ( i == 1 && ii == 0 ) { /* sign difference */
01358         goto endofloop;
01359     }
01360     else if ( i > 0 ) {
01361         WORD *cto, *cfrom, *csav, ci;
01362         WORD oRepFunNum;
01363         WORD *oRepFunList;
01364         WORD *oterstart,*oterstop,*opatstop;
01365         WORD oExpectedSign;
01366         WORD wildargs, wildeat;
01367 /*
01368         Not an exact match here.
01369         We have to hope that the pattern contains a composite wildcard.
01370 */
01371         m = oldm; t = oldt;
01372         m += ARGHEAD; t += ARGHEAD; /* Point at (first?) term */
01373         mtrmstop = m + *m;
01374         ttrmstop = t + *t;
01375         if ( mtrmstop < argmstop ) goto endofloop; /* More than one term */
01376         msizcoef = mtrmstop[-1];
01377         if ( msizcoef < 0 ) msizcoef = -msizcoef;
01378         msubstop = mtrmstop - msizcoef;
01379         m++;
01380         if ( m >= msubstop ) goto endofloop; /* Only coefficient */
01381 /*
01382         Here we have a composite term. It can match provided it
01383         matches the entire argument. This argument must be a
01384         single term also and the coefficients should match
01385         (more or less).
01386         The matching takes:
01387         1: Match the functions etc. Nothing can be left.
01388         2: Match dotproducts and symbols. ONLY must match
01389             and nothing may be left.
01390         For safety it is best to take the term out and put it
01391         in workspace.
01392 */
01393

```

```

01394         if ( argtstop > ttrmstop ) goto endofloop;
01395         m--;
01396         oterstart = AN.terstart;
01397         oterstop = AN.terstop;
01398         opatstop = AN.patstop;
01399         oRepFunList = AN.RepFunList;
01400         oRepFunNum = AN.RepFunNum;
01401         AN.RepFunNum = 0;
01402         AN.RepFunList = AT.WorkPointer;
01403         AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
01404         if ( AT.WorkPointer+*t+5 > AT.WorkTop ) {
01405             MLOCK(ErrorMessageLock);
01406             MesWork();
01407             MUNLOCK(ErrorMessageLock);
01408             return(-1);
01409         }
01410         csav = cto = AT.WorkPointer;
01411         cfrom = t;
01412         ci = *t;
01413         while ( --ci >= 0 ) *cto++ = *cfrom++;
01414         AT.WorkPointer = cto;
01415         ci = msizcoef;
01416         cfrom = mtrmstop;
01417         --ci;
01418         if ( abs(*--cfrom) != abs(*--cto) ) {
01419             AT.WorkPointer = csav;
01420             AN.RepFunList = oRepFunList;
01421             AN.RepFunNum = oRepFunNum;
01422             AN.terstart = oterstart;
01423             AN.terstop = oterstop;
01424             AN.patstop = opatstop;
01425             goto endofloop;
01426         }
01427         i = (*cfrom != *cto) ? 1 : 0; /* buffer AN.ExpectedSign until we are beyond the goto
01428 */
01429         while ( --ci >= 0 ) {
01430             if ( *--cfrom != *--cto ) {
01431                 AT.WorkPointer = csav;
01432                 AN.RepFunList = oRepFunList;
01433                 AN.RepFunNum = oRepFunList;
01434                 AN.terstart = oterstart;
01435                 AN.terstop = oterstop;
01436                 AN.patstop = opatstop;
01437                 goto endofloop;
01438             }
01439             oExpectedSign = AN.ExpectedSign; /* buffer AN.ExpectedSign until we are beyond
FindRest/FindOnly */
01440             AN.ExpectedSign = i;
01441             *m -= msizcoef;
01442             wildargs = AN.WildArgs;
01443             wildeat = AN.WildEat;
01444             for ( i = 0; i < wildargs; i++ ) wildargtaken[i] = AT.WildArgTaken[i];
01445             AN.ForFindOnly = 0; AN.UseFindOnly = 1;
01446             AN.nogroundlevel++;
01447             if ( FindRest(BHEAD csav,m) && ( AN.UsedOtherFind || FindOnly(BHEAD csav,m) ) ) {}
01448             else {
01449 nomatch:
01450                 *m += msizcoef;
01451                 AT.WorkPointer = csav;
01452                 AN.RepFunList = oRepFunList;
01453                 AN.RepFunNum = oRepFunList;
01454                 AN.terstart = oterstart;
01455                 AN.terstop = oterstop;
01456                 AN.patstop = opatstop;
01457                 AN.WildArgs = wildargs;
01458                 AN.WildEat = wildeat;
01459                 AN.ExpectedSign = oExpectedSign;
01460                 AN.nogroundlevel--;
01461                 for ( i = 0; i < wildargs; i++ ) AT.WildArgTaken[i] = wildargtaken[i];
01462                 goto endofloop;
01463             }
01464             /*
01465 */
01466             if ( *m == 1 || m[1] < FUNCTION || functions[m[1]-FUNCTION].spec >= TENSORFUNCTION ) {
01467                 if ( *m == 1 || m[1] < FUNCTION ) {
01468                     if ( AN.ExpectedSign ) goto nomatch;
01469                 }
01470                 else {
01471                     if ( m[1] > FUNCTION + WILDOFFSET ) {
01472                         if ( functions[m[1]-FUNCTION-WILDOFFSET].spec >= TENSORFUNCTION ) {
01473                             if ( AN.ExpectedSign != AN.RepFunList[AN.RepFunNum-1] ) goto nomatch;
01474                         }
01475                     }
01476                     else {
01477                         if ( AN.ExpectedSign != AN.RepFunList[AN.RepFunNum-1] ) goto nomatch;
01478                     }
01479                     if ( functions[m[1]-FUNCTION].spec >= TENSORFUNCTION ) {

```

```

01478             if ( AN.ExpectedSign != AN.RepFunList[AN.RepFunNum-1] ) goto nomatch;
01479             }
01480 */
01481     }
01482     }
01483     AN.nogroundlevel--;
01484     AN.ExpectedSign = oExpectedSign;
01485     AN.WildArgs = wildargs;
01486     AN.WildEat = wildeat;
01487     for ( i = 0; i < wildargs; i++ ) AT.WildArgTaken[i] = wildargtaken[i];
01488     Substitute(BHEAD csav,m,1);
01489     cto = csav;
01490     cfrom = cto + *cto - msizcoef;
01491     cto++;
01492     *m += msizcoef;
01493     AT.WorkPointer = csav;
01494     AN.RepFunList = oRepFunList;
01495     AN.RepFunNum = oRepFunNum;
01496     AN.terstart = oterstart;
01497     AN.terstop = oterstop;
01498     AN.patstop = opatstop;
01499     if ( *cto != SUBEXPRESSION ) goto endofloop;
01500     cto += cto[1];
01501     if ( cto < cfrom ) goto endofloop;
01502     }
01503     }
01504     else goto endofloop;
01505
01506     t = argtstop; /* Next argument */
01507     m = argmstop;
01508     }
01509     if ( AN.SignCheck && AN.ExpectedSign ) goto endofloop;
01510     AT.WorkPointer = OldWork;
01511     if ( AN.WildArgs > 1 ) *wilds = 1;
01512     if ( AN.SignCheck && AN.ExpectedSign ) return(0);
01513     return(1); /* m was eaten. we have a match! */
01514
01515 endofloop;;
01516 /*
01517     restore the current Wildcard assignments
01518 */
01519     i = nwstore;
01520     if ( i > 0 ) {
01521         m = AN.WildValue;
01522         t = OldWork + ntwa; r = AT.WildMask;
01523         do {
01524             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01525         } while ( --i > 0 );
01526         C->numrhs = *t++;
01527         C->Pointer = C->Buffer + oldcpointer;
01528     }
01529
01530 endoloop;;
01531     i = AN.WildArgs-1;
01532     if ( i <= 0 ) {
01533         AT.WorkPointer = OldWork;
01534         return(0);
01535     }
01536     while ( --i >= 0 ) {
01537         if ( AT.WildArgTaken[i] == 0 ) {
01538             if ( i == 0 ) {
01539                 AT.WorkPointer = OldWork;
01540                 return(0);
01541             }
01542         }
01543         else {
01544             (AT.WildArgTaken[i])--;
01545             numofwildarg = 0;
01546             for ( j = 0; j <= i; j++ ) {
01547                 numofwildarg += AT.WildArgTaken[j];
01548             }
01549             AT.WildArgTaken[j] = AN.WildEat-numofwildarg;
01550 /* -----> bug to be replaced in other source code */
01551             for ( j++; j < AN.WildArgs; j++ ) AT.WildArgTaken[j] = 0;
01552             break;
01553         }
01554     }
01555     goto toptofloop;
01556 NoCaseB:
01557 /*
01558     Restore the old Wildcard assignments
01559 */
01560     i = nwstore;
01561     if ( i > 0 ) {
01562         m = AN.WildValue;
01563         t = OldWork + ntwa; r = AT.WildMask;
01564         do {

```



```

01565         *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01566     } while ( --i > 0 );
01567     C->numrhs = *t++;
01568     C->Pointer = C->Buffer + oldcpointer;
01569 }
01570 AT.WorkPointer = OldWork;
01571 return(0);      /* no match */
01572 }
01573
01574 /*
01575     #] MatchFunction :
01576     #[ ScanFunctions :          WORD ScanFunctions(inpat,inter,par)
01577
01578     Finds in which functions to look for a match.
01579     inpat is the start of the pattern still to be matched.
01580     inter is the start of the term still to be matched.
01581     par gives information about commutativity.
01582         par = 0: nothing special
01583         par = 1: regular noncommuting function
01584         par = 2: GAMMA function
01585
01586     AN.patstop: end of the functions field in the search pattern
01587     AN.terstop: end of the functions field in the target pattern
01588     AN.terstart: address of entire term;
01589
01590     The actual matching of the functions and their arguments is done
01591     in a number of different routines. Mainly MatchFunction when there
01592     are no symmetry properties.
01593     Also: MatchE
01594           MatchCy
01595           FunMatchSy
01596           FunMatchCy
01597
01598     The main problem here is backtracking, ie continuing with wildcard
01599     possibilities when a first assignment doesn't work.
01600     Important note: this was completely forgotten in the symmetric
01601     functions till 6-jan-2009. As of the moment this still has to
01602     be fixed.  ?????21-mar-2023????? Is this still unfixed?????
01603
01604     Functions inside functions can cause problems when antisymmetric
01605     functions are involved. The sign of the term may be at stake.
01606     At the lowest level this is no problem but in f(-fas(n2,n1)) this
01607     plays a role. Next is when we have a product of functions inside
01608     an argument. The strategy must be that we test the sign only at the
01609     last function. Hence, when inpat+inpat[1] >= AN.patstop.
01610     We might relax that to the last antisymmetric function at a later stage.
01611
01612     New scheme to be implemented for non-commuting objects:
01613     When we are matching a second (or higher) function, any match can only
01614     be directly after the last matched non-commuting function or a commuting
01615     function. This will take care of whatever happens in MatchE etc.
01616 */
01617
01618 int ScanFunctions(PHEAD WORD *inpat, WORD *inter, WORD par)
01619 {
01620     GETBIDENTITY
01621     WORD i, *m, *t, *r, sym, psym;
01622     WORD *newpat, *newter, *instart, *oinpat = 0, *ointer = 0;
01623     WORD nwstore, offset, *OldWork, SetStop = 0, oRepFunNum = AN.RepFunNum;
01624     WORD wilds, wildargs = 0, wildeat = 0, *wildargtaken;
01625     WORD *Oterfirstcomm = AN.terfirstcomm;
01626     CBUF *C = cbuf+AT.ebufnum;
01627     int ntw = AN.NumTotWildArgs;
01628     LONG oldcpointer = C->Pointer - C->Buffer;
01629     WORD oldSignCheck = AN.SignCheck;
01630     instart = inter;
01631
01632     /*
01633     Only active for the last function in the pattern.
01634     The actual test on the sign is in MatchFunction or the symmetric functions
01635     */
01636     if ( AN.nogroundlevel ) {
01637         AN.SignCheck = ( inpat + inpat[1] >= AN.patstop ) ? 1 : 0;
01638     }
01639     else {
01640         AN.SignCheck = 0;
01641     }
01642
01643     /*
01644         Store the current Wildcard assignments
01645     */
01646     t = wildargtaken = OldWork = AT.WorkPointer;
01647     t += ntw;
01648     m = AN.WildValue;
01649     nwstore = i = (m[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
01650     if ( i > 0 ) {
01651         r = AT.WildMask;
01652         do {
01653             *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;

```

```

01652         } while ( --i > 0 );
01653         *t++ = C->numrhs;
01654     }
01655     if ( t >= AT.WorkTop ) {
01656         MLOCK(ErrorMessageLock);
01657         MesWork();
01658         MUNLOCK(ErrorMessageLock);
01659         Terminate(-1);
01660     }
01661     AT.WorkPointer = t;
01662     do {
01663 #ifndef NEWCOMMUTE
01664 /*
01665      Find an eligible unsubstituted function
01666 */
01667     if ( AN.RepFunNum > 0 ) {
01668 /*
01669      First try a non-commuting function, just after the last
01670      substituted non-commuting function.
01671 */
01672     if ( *inter >= FUNCTION && functions[*inter-FUNCTION].commute ) {
01673         do {
01674             offset = WORDDIF(inter,AN.terstart);
01675             for ( i = 0; i < AN.RepFunNum; i += 2 ) {
01676                 if ( AN.RepFunList[i] >= offset ) break;
01677             }
01678             if ( i >= AN.RepFunNum ) break;
01679             inter += inter[1];
01680         } while ( inter < AN.terfirstcomm );
01681         if ( inter < AN.terfirstcomm ) { /* Check that it is directly after */
01682             for ( i = 0; i < AN.RepFunNum; i += 2 ) {
01683                 if ( functions[AN.terstart[AN.RepFunList[i]]-FUNCTION].commute
01684                     && AN.RepFunList[i]+AN.terstart[AN.RepFunList[i]+1] == offset ) break;
01685             }
01686             if ( i < AN.RepFunNum ) goto trythis;
01687         }
01688         inter = AN.terfirstcomm;
01689     }
01690 /*
01691     Now try one of the commuting functions
01692 */
01693     while ( inter < AN.terstop ) {
01694         offset = WORDDIF(inter,AN.terstart);
01695         for ( i = 0; i < AN.RepFunNum; i += 2 ) {
01696             if ( AN.RepFunList[i] == offset ) break;
01697         }
01698         if ( i >= AN.RepFunNum ) break;
01699         inter += inter[1];
01700     }
01701     if ( inter >= AN.terstop ) goto Failure;
01702 trythis:;
01703     }
01704     else {
01705 /*
01706      The first function can be anywhere. We have no problems.
01707 */
01708         offset = WORDDIF(inter,AN.terstart);
01709     }
01710 #else
01711 /* first find an unsubstituted function */
01712     do {
01713         offset = WORDDIF(inter,AN.terstart);
01714         for ( i = 0; i < AN.RepFunNum; i += 2 ) {
01715             if ( AN.RepFunList[i] == offset ) break;
01716         }
01717         if ( i >= AN.RepFunNum ) break;
01718         inter += inter[1];
01719     } while ( inter < AN.terstop );
01720     if ( inter >= AN.terstop ) goto Failure;
01721 #endif
01722     wilds = 0;
01723     /* We found one */
01724     if ( *inter >= FUNCTION && *inpat >= FUNCTION ) {
01725         if ( *inpat == *inter || *inpat >= FUNCTION + WILDOFFSET ) {
01726 /*
01727             if ( inter[1] == FUNHEAD ) goto rewild;
01728 */
01729             if ( functions[*inter-FUNCTION].spec >= TENSORFUNCTION
01730                 && ( *inter == *inpat ||
01731                     functions[*inpat-FUNCTION-WILDOFFSET].spec >= TENSORFUNCTION ) ) {
01732                 sym = functions[*inter-FUNCTION].symmetric & ~REVERSEORDER;
01733                 if ( *inpat == *inter ) psym = sym;
01734                 else psym = functions[*inpat-FUNCTION-WILDOFFSET].symmetric & ~REVERSEORDER;
01735                 if ( sym == ANTISYMMETRIC || sym == SYMMETRIC
01736                     || psym == SYMMETRIC || psym == ANTISYMMETRIC ) {
01737                     if ( sym == ANTISYMMETRIC && psym == SYMMETRIC ) goto rewild;
01738                     if ( sym == SYMMETRIC && psym == ANTISYMMETRIC ) goto rewild;

```

```

01739 /*
01740             Special function call for (anti)symmetric tensors
01741 */
01742     if ( MatchE(BHEAD inpat,inter,instart,par) ) goto OnSuccess;
01743 }
01744 else if ( sym == CYCLESYMMETRIC || sym == RCYCLESYMMETRIC
01745 || psym == CYCLESYMMETRIC || psym == RCYCLESYMMETRIC ) {
01746 /*
01747             Special function call for (r)cyclic tensors
01748 */
01749     if ( MatchCy(BHEAD inpat,inter,instart,par) ) goto OnSuccess;
01750 }
01751 else goto rewild;
01752 }
01753 else if ( functions[*inter-FUNCTION].spec <= 0
01754 && ( *inter == *inpat ||
01755 functions[*inpat-FUNCTION-WILDOFFSET].spec <= 0 ) ) {
01756     sym = functions[*inter-FUNCTION].symmetric & ~REVERSEORDER;
01757     if ( *inpat == *inter ) psym = sym;
01758     else psym = functions[*inpat-FUNCTION-WILDOFFSET].symmetric & ~REVERSEORDER;
01759     if ( psym == SYMMETRIC || sym == SYMMETRIC
01760 /*
01761         The next statement was commented out. Why???
01762         Werkt nog niet. Teken wordt nog niet bijgehouden.
01763         5-nov-2001
01764 */
01765 || psym == ANTISYMMETRIC || sym == ANTISYMMETRIC
01766 ) {
01767     if ( sym == ANTISYMMETRIC && psym == SYMMETRIC ) goto rewild;
01768     if ( sym == SYMMETRIC && psym == ANTISYMMETRIC ) goto rewild;
01769     if ( FunMatchSy(BHEAD inpat,inter,instart,par) ) goto OnSuccess;
01770 }
01771 else
01772     if ( sym == CYCLESYMMETRIC || sym == RCYCLESYMMETRIC
01773 || psym == CYCLESYMMETRIC || psym == RCYCLESYMMETRIC ) {
01774     if ( FunMatchCy(BHEAD inpat,inter,instart,par) ) goto OnSuccess;
01775 }
01776     else goto rewild;
01777 }
01778     else goto rewild;
01779     AN.terfirstcomm = Oterfirstcomm;
01780 }
01781     else if ( par > 0 ) { SetStop = 1; goto maybenext; }
01782 }
01783 else {
01784 rewild:
01785     AN.terfirstcomm = Oterfirstcomm;
01786     if ( *inter != SUBEXPRESSION && MatchFunction(BHEAD inpat,inter,&wilds) ) {
01787         AN.terfirstcomm = Oterfirstcomm;
01788         if ( wilds ) {
01789 /*
01790             Store wildcards to continue in MatchFunction if the current
01791             wildcards do not work out.
01792 */
01793             wildargs = AN.WildArgs;
01794             wildeat = AN.WildEat;
01795             for ( i = 0; i < wildargs; i++ ) wildargtaken[i] = AT.WildArgTaken[i];
01796             oinpat = inpat; ointer = inter;
01797         }
01798         if ( par && *inter == GAMMA && AN.RepFunList[AN.RepFunNum+1] ) {
01799             SetStop = 1; goto NoMat;
01800         }
01801         if ( par == 2 ) {
01802             if ( *inter < FUNCTION || functions[*inter-FUNCTION].commute ) {
01803                 goto NoMat;
01804             }
01805             par = 1;
01806         }
01807         AN.RepFunList[AN.RepFunNum] = offset;
01808         AN.RepFunNum += 2;
01809         newpat = inpat + inpat[1];
01810         if ( newpat >= AN.patstop ) {
01811             if ( AN.UseFindOnly == 0 ) {
01812                 if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01813                     AN.UsedOtherFind = 1;
01814                     goto OnSuccess;
01815                 }
01816                 AN.RepFunNum -= 2;
01817                 goto NoMat;
01818             }
01819             goto OnSuccess;
01820         }
01821         if ( *inter < FUNCTION || functions[*inter-FUNCTION].commute ) {
01822             newter = inter + inter[1];
01823             if ( newter >= AN.terstop ) goto Failure;
01824             if ( *inter == GAMMA && inpat[1] <
01825                 inter[1] - AN.RepFunList[AN.RepFunNum-1] ) {

```

```

01826         if ( ScanFunctions(BHEAD newpat,newter,2) ) goto OnSuccess;
01827         AN.terfirstcomm = Oterfirstcomm;
01828     }
01829     else if ( *newter == SUBEXPRESSION ) {}
01830     else if ( functions[*inter-FUNCTION].commute ) {
01831         if ( ScanFunctions(BHEAD newpat,newter,1) ) goto OnSuccess;
01832         AN.terfirstcomm = Oterfirstcomm;
01833         if ( ( *newpat < (FUNCTION+WILDOFFSET)
01834             && ( functions[*newpat-FUNCTION].commute == 0 ) ) ||
01835             ( *newpat >= (FUNCTION+WILDOFFSET)
01836             && ( functions[*newpat-FUNCTION-WILDOFFSET].commute == 0 ) ) ) {
01837             newter = AN.terfirstcomm;
01838             if ( newter < AN.terstop && ScanFunctions(BHEAD newpat,newter,1) ) goto
OnSuccess;
01839         }
01840     }
01841     else {
01842         if ( ScanFunctions(BHEAD newpat,instart,1) ) goto OnSuccess;
01843         AN.terfirstcomm = Oterfirstcomm;
01844     }
01845     SetStop = par;
01846 }
01847 else {
01848 /*
01849     Shouldn't this be newpat instead of inpat????
01850 */
01851     if ( par && inter > instart && ( ( *newpat < (FUNCTION+WILDOFFSET)
01852     && functions[*newpat-FUNCTION].commute ) ||
01853     ( *newpat >= (FUNCTION+WILDOFFSET)
01854     && functions[*newpat-FUNCTION-WILDOFFSET].commute ) ) ) {
01855         SetStop = 1;
01856     }
01857     else {
01858         newter = instart;
01859         if ( ScanFunctions(BHEAD newpat,newter,par) ) goto OnSuccess;
01860         AN.terfirstcomm = Oterfirstcomm;
01861     }
01862 }
01863 /*
01864     Restore the old Wildcard assignments
01865 */
01866 NoMat:
01867     i = nwstore;
01868     if ( i > 0 ) {
01869         m = AN.WildValue;
01870         t = OldWork + ntw; r = AT.WildMask;
01871         do {
01872             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01873         } while ( --i > 0 );
01874         C->numrhs = *t++;
01875         C->Pointer = C->Buffer + oldcpointer;
01876     }
01877 /*
01878     AN.RepFunNum -= 2; */
01879     AN.RepFunNum = oRepFunNum;
01880     if ( wilds ) {
01881         inter = ointer; inpat = oinpat;
01882         AN.WildArgs = wildargs;
01883         AN.WildEat = wildeat;
01884         for ( i = 0; i < wildargs; i++ ) AT.WildArgTaken[i] = wildargtaken[i];
01885         goto rewild;
01886     }
01887     if ( SetStop ) break;
01888 }
01889 else if ( par ) {
01890 maybenext:
01891     if ( *inpat < (FUNCTION+WILDOFFSET) ) {
01892         if ( *inpat < FUNCTION ||
01893             functions[*inpat-FUNCTION].commute ) break;
01894     }
01895     else {
01896         if ( functions[*inpat-FUNCTION-WILDOFFSET].commute ) break;
01897     }
01898     inter += inter[1];
01899 } while ( inter < AN.terstop );
01900 Failure:
01901     AN.SignCheck = oldSignCheck;
01902     AT.WorkPointer = OldWork;
01903     return(0);
01904 OnSuccess:
01905     if ( AT.idallflag && AN.nogroundlevel <= 0 ) {
01906         if ( AT.idallmaxnum > 0 && AT.idallnum >= AT.idallmaxnum ) {
01907             AN.terfirstcomm = Oterfirstcomm;
01908             AN.SignCheck = oldSignCheck;
01909             AT.WorkPointer = OldWork;
01910             return(0);
01911         }

```

```

01912         SubsInAll(BHEAD0);
01913         AT.idallnum++;
01914         if ( AT.idallmaxnum == 0 || AT.idallnum < AT.idallmaxnum ) goto NoMat;
01915     }
01916     AN.terfirstcomm = Oterfirstcomm;
01917     AN.SignCheck = oldSignCheck;
01918     /*
01919     Now the disorder test
01920     */
01921     if ( AN.DisOrderFlag && AN.RepFunNum >= 4 ) {
01922         WORD k, kk;
01923         for ( i = 2; i < AN.RepFunNum; i += 2 ) {
01924             /*
01925             -----> We still have to copy the code from Normalize wrt properorderflag
01926             */
01927             m = AN.terstart + AN.RepFunList[i-2];
01928             t = AN.terstart + AN.RepFunList[i];
01929             if ( *m != *t ) {
01930                 if ( *m > *t ) continue;
01931                 goto doesmatch;
01932             }
01933             if ( *m >= FUNCTION && functions[*m-FUNCTION].spec >=
01934                 TENSORFUNCTION ) {
01935                 k = m[1] - FUNHEAD;
01936                 kk = t[1] - FUNHEAD;
01937                 m += FUNHEAD;
01938                 t += FUNHEAD;
01939             }
01940             else {
01941                 k = m[1] - FUNHEAD;
01942                 kk = t[1] - FUNHEAD;
01943                 m += FUNHEAD;
01944                 t += FUNHEAD;
01945             }
01946             while ( k > 0 && kk > 0 ) {
01947                 if ( *m < *t ) goto NextFor;
01948                 else if ( *m++ > *t++ ) goto doesmatch;
01949                 k--; kk--;
01950             }
01951             if ( k > 0 ) goto doesmatch;
01952 NextFor:;
01953         }
01954         SetStop = 1;
01955         goto NoMat;
01956     }
01957 doesmatch:
01958     AT.WorkPointer = OldWork;
01959     return(1);
01960 }
01961
01962 /*
01963     #] ScanFunctions :
01964     #] Patterns :
01965     */

```

4.55 fwin.h File Reference

Macros

- #define [LINEFEED](#) '\n'
- #define [CARRIAGERETURN](#) 0x0D
- #define [WITHRETURN](#)
- #define [WITHSYSTEM](#)
- #define [P_term](#)(code) exit((int)(code<0?-code:code))
- #define [SEPARATOR](#) '\\'
- #define [ALTSEPARATOR](#) '/'
- #define [PATHSEPARATOR](#) ';'
- #define [WITH_ENV](#)

4.55.1 Detailed Description

Settings for Windows computers.

Definition in file [fwin.h](#).

4.55.2 Macro Definition Documentation

4.55.2.1 LINEFEED

```
#define LINEFEED '\n'
```

Definition at line 33 of file [fwin.h](#).

4.55.2.2 CARRIAGERETURN

```
#define CARRIAGERETURN 0x0D
```

Definition at line 34 of file [fwin.h](#).

4.55.2.3 WITHRETURN

```
#define WITHRETURN
```

Definition at line 35 of file [fwin.h](#).

4.55.2.4 WITHSYSTEM

```
#define WITHSYSTEM
```

Definition at line 37 of file [fwin.h](#).

4.55.2.5 P_term

```
#define P_term(  
    code ) exit((int) (code<0?-code:code))
```

Definition at line 39 of file [fwin.h](#).

4.55.2.6 SEPARATOR

```
#define SEPARATOR '\\'
```

Definition at line 41 of file [fwin.h](#).

4.55.2.7 ALTSEPARATOR

```
#define ALTSEPARATOR '/'
```

Definition at line 42 of file [fwin.h](#).

4.55.2.8 PATHSEPARATOR

```
#define PATHSEPARATOR ';'
```

Definition at line 43 of file [fwin.h](#).

4.55.2.9 WITH_ENV

```
#define WITH_ENV
```

Definition at line 44 of file [fwin.h](#).

4.56 fwin.h

[Go to the documentation of this file.](#)

```
00001
00006 /* #[] License : */
00007 /*
00008 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032
00033 #define LINEFEED '\n'
00034 #define CARRIAGERETURN 0x0D
00035 #define WITHRETURN
00036
00037 #define WITHSYSTEM
00038
00039 #define P_term(code)    exit((int)(code<0?-code:code))
00040
00041 #define SEPARATOR '\\\
00042 #define ALTSEPARATOR '/'
00043 #define PATHSEPARATOR ';'
00044 #define WITH_ENV
```

4.57 gentopo.cc

```
00001 // { ( [
00002
00003 #ifdef HAVE_CONFIG_H
00004 #ifndef CONFIG_H_INCLUDED
00005 #define CONFIG_H_INCLUDED
00006 #include <config.h>
00007 #endif
00008 #endif
00009
00010 #include <iostream>
00011 #include <iomanip>
```

```

00012 #include <sstream>
00013 #include <cstdio>
00014 #include <stdlib.h>
00015
00016 #include "grcc.h"
00017 #include "gentopo.h"
00018
00019 #define DUMMYUSE(x) (void)(x)
00020
00021 using namespace std;
00022
00023 // The next limitation is imposed by the fact that the latest compilers
00024 // can give warnings on declarations like "int dtc11[nNodes]"
00025 // With a bit of overkill there should be no real problems.
00026 #define MAXNODES 100
00027 #define MAXNCASSES 100
00028
00029 // Generate scalar connected Feynman graphs.
00030
00031 //=====
00032
00033 typedef int Bool;
00034 const int T_True = 1;
00035 const int T_False = 0;
00036
00037 // compile options
00038 const int CHECK = T_True;
00039 //const int MONITOR = T_True;
00040 const int MONITOR = T_False;
00041
00042 const int OPTPRINT = T_False;
00043
00044 const int DEBUG0 = T_False;
00045 //const int DEBUG1 = T_False;
00046 const int DEBUG = T_False;
00047
00048 // for debugging memory use
00049 #define DEBUGM T_False
00050
00051 //=====
00052 class T_MGraph;
00053 class T_EGraph;
00054
00055 #define Extern
00056 #define Global
00057 #define Local
00058
00059 // External functions
00060 Extern void toForm(T_EGraph *egraph);
00061 Extern int countPhiCon(int ex, int lp, int v4);
00062
00063 // Temporal definition: they should be replaced by FROM functions.
00064 Local BigInt factorial(int n);
00065 Local BigInt ipow(int n, int p);
00066
00067 // Local functions
00068 Local int nextPerm(int nelem, int nclass, int *cl, int *r, int *q, int *p, int count);
00069
00070 Local void erEnd(const char *msg);
00071 Local int *newArray(int size, int val);
00072 Local void deletArray(int *a);
00073 Local void copyArray(int size, int *a0, int *a1);
00074 Local int **newMat(int n0, int n1, int val);
00075 Local void deleteMat(int **m, int n0, int n1);
00076 Local void printArray(int n, int *p);
00077 Local void printMat(int n0, int n1, int **m);
00078
00079 #if DEBUGM
00080 static int countNMC = 0;
00081 static int countEG = 0;
00082 static int countMG = 0;
00083 #endif
00084
00085 //=====
00086 // class T_EGraph
00087
00088 T_EGraph::T_EGraph(int nnodes, int nedges, int mxdeg)
00089 {
00090     int j;
00091
00092     nNodes = nnodes;
00093     nEdges = nedges;
00094     maxdeg = mxdeg; // maximum value of degree of nodes
00095     nExtern = 0;
00096
00097     nodes = new T_ENode[nNodes];
00098     edges = new T_EEdge[nEdges+1];

```



```

00099     for (j = 0; j < nNodes; j++) {
00100         nodes[j].deg = 0;
00101         nodes[j].edges = new int[maxdeg];
00102     }
00103     #if DEBUGM
00104     printf("+++ new T_EGraph %d\n", ++countEG);
00105     if(countEG > 100) { exit(1); }
00106     #endif
00107 }
00108
00109 T_EGraph::~T_EGraph()
00110 {
00111     int j;
00112
00113     for (j = 0; j < nNodes; j++) {
00114         delete[] nodes[j].edges;
00115     }
00116     delete[] nodes;
00117     delete[] edges;
00118     #if DEBUGM
00119     printf("+++ delete T_EGraph %d\n", countEG--);
00120     #endif
00121 }
00122
00123 // construct T_EGraph from adjacency matrix
00124 void T_EGraph::init(int pid, long gid, int **adjmat, Bool sopi, BigInt nsm, BigInt esm)
00125 {
00126     int n0, n1, ed, e, eext, eint;
00127     // Bool ok;
00128
00129     pId = pid;
00130     gId = gid;
00131     opi = sopi;
00132     nsym = nsm;
00133     esym = esm;
00134
00135     for (n0 = 0; n0 < nNodes; n0++) {
00136         nodes[n0].deg = 0;
00137     }
00138     ed = 1;
00139     for (n0 = 0; n0 < nNodes; n0++) {
00140         for (e = 0; e < adjmat[n0][n0]/2; e++, ed++) {
00141             edges[ed].nodes[0] = n0;
00142             edges[ed].nodes[1] = n0;
00143             nodes[n0].edges[nodes[n0].deg++] = - ed;
00144             nodes[n0].edges[nodes[n0].deg++] = ed;
00145             edges[ed].ext = nodes[n0].ext;
00146         }
00147         for (n1 = n0+1; n1 < nNodes; n1++) {
00148             for (e = 0; e < adjmat[n0][n1]; e++, ed++) {
00149                 edges[ed].nodes[0] = n0;
00150                 edges[ed].nodes[1] = n1;
00151                 nodes[n0].edges[nodes[n0].deg++] = - ed;
00152                 nodes[n1].edges[nodes[n1].deg++] = ed;
00153                 edges[ed].ext = (nodes[n0].ext || nodes[n1].ext);
00154             }
00155         }
00156     }
00157     if (CHECK) {
00158         if (ed != nEdges+1) {
00159             printf("*** T_EGraph::init: ed=%d != nEdges=%d\n", ed, nEdges);
00160             erEnd("*** T_EGraph::init: illegal connection\n");
00161         }
00162     }
00163
00164     // name of momenta
00165     eext = 1;
00166     eint = 1;
00167     for (ed = 1; ed <= nEdges; ed++) {
00168         if (edges[ed].ext) {
00169             edges[ed].momn = eext++;
00170             edges[ed].momc[0] = 'Q';
00171             edges[ed].momc[1] = ((char)0);
00172         } else {
00173             edges[ed].momn = eint++;
00174             edges[ed].momc[0] = 'P';
00175             edges[ed].momc[1] = ((char)0);
00176         }
00177     }
00178 }
00179
00180 // set external particle to node 'nd'
00181 void T_EGraph::setExtern(int nd, Bool val)
00182 {
00183     nodes[nd].ext = val;
00184 }
00185

```

```

00186 // end of calling 'setExtern'
00187 void T_EGraph::endSetExtern(void)
00188 {
00189     int n;
00190
00191     nExtern = 0;
00192     for (n = 0; n < nNodes; n++) {
00193         if (nodes[n].ext) {
00194             nExtern++;
00195         }
00196     }
00197 }
00198
00199 // print the T_EGraph
00200 void T_EGraph::print()
00201 {
00202     int nd, lg, ed, nlp;
00203
00204     nlp = nEdges - nNodes + 1;
00205     printf("\n");
00206     printf("T_EGraph: pId=%d gId=%ld nExtern=%d nLoops=%d nNodes=%d nEdges=%d\n",
00207         pId, gId, nExtern, nlp, nNodes, nEdges);
00208     printf("      sym = (%ld * %ld) maxdeg=%d\n", nsym, esym, maxdeg);
00209     printf("  Nodes\n");
00210     for (nd = 0; nd < nNodes; nd++) {
00211         if (nodes[nd].ext) {
00212             printf("    %2d Extern ", nd);
00213         } else {
00214             printf("    %2d Vertex ", nd);
00215         }
00216         printf("deg=%d [", nodes[nd].deg);
00217         for (lg = 0; lg < nodes[nd].deg; lg++) {
00218             printf(" %3d", nodes[nd].edges[lg]);
00219         }
00220         printf("]\n");
00221     }
00222     printf("  Edges\n");
00223     for (ed = 1; ed <= nEdges; ed++) {
00224         if (edges[ed].ext) {
00225             printf("    %2d Extern ", ed);
00226         } else {
00227             printf("    %2d Intern ", ed);
00228         }
00229         printf("%s%d", (edges[ed].ext)?"Q":"p", edges[ed].momn);
00230         printf(" [%3d %3d]\n", edges[ed].nodes[1], edges[ed].nodes[0]);
00231     }
00232 }
00233
00234 //=====
00235 // class T_MNode : nodes in T_MGraph
00236
00237 T_MNode::T_MNode(int vid, int vdeg, Bool vext, int vclss)
00238 {
00239     id      = vid;      // id of the node
00240     deg     = vdeg;     // degree of the node
00241     freelg  = vdeg;     // number of free legs
00242     clss    = vclss;    // class to which the node belongs
00243     ext     = vext;     // external node or not
00244 }
00245
00246 //=====
00247 // class of node-classes for T_MGraph
00248 //
00249 class T_MNodeClass {
00250 public:
00251     int    nNodes;           // the number of nodes
00252     int    nClasses;         // the number of classes
00253     int    *clist;           // the number of nodes in each class
00254     int    *ndcl;            // node --> class
00255     int    **clmat;          // matrix used for classification
00256     int    *flist;           // the first node in each class
00257     int    maxdeg;           // maximal value of degree(node)
00258     int    forallignment;
00259
00260     T_MNodeClass(int nnodes, int ncl);
00261     ~T_MNodeClass();
00262     void init(int *cl, int mxdeg, int **adjmat);
00263     void copy(T_MNodeClass* mnc);
00264     int  clCmp(int nd0, int nd1, int cn);
00265     void printMat(void);
00266
00267     void mkFlist(void);
00268     void mkNdCl(void);
00269     void mkClMat(int **adjmat);
00270     void incMat(int nd, int td, int val);
00271     Bool chkOrd(int nd, int ndc, T_MNodeClass *cl, int *dtcl);
00272     int  cmpArray(int *a0, int *a1, int ma);

```

```

00273 };
00274
00275 T_MNodeClass::T_MNodeClass(int nnodes, int ncl)
00276 {
00277     nNodes    = nnodes;
00278     nClasses   = ncl;
00279     clist      = new int[nClasses];
00280     ndcl       = new int[nNodes];
00281     clmat      = newMat(nNodes, nClasses, 0);
00282     flist      = new int[nClasses+1];
00283
00284 #if DEBUGM
00285     printf("+++ new    T_MNodeClass %d\n", ++countNMC);
00286     if(countNMC > 100) { exit(1); }
00287 #endif
00288 }
00289
00290 T_MNodeClass::~T_MNodeClass()
00291 {
00292     delete[] clist;
00293     delete[] ndcl;
00294     deleteMat(clmat, nNodes, nClasses);
00295     delete[] flist;
00296
00297 #if DEBUGM
00298     printf("+++ delete T_MNodeClass %d\n", countNMC--);
00299 #endif
00300 }
00301
00302 void T_MNodeClass::init(int *cl, int mxdeg, int **adjmat)
00303 {
00304     int j;
00305
00306     for (j = 0; j < nClasses; j++) {
00307         clist[j] = cl[j];
00308     }
00309     maxdeg    = mxdeg;
00310     mkNdCl();
00311     mkClMat(adjmat);
00312     mkFlist();
00313 }
00314
00315 void T_MNodeClass::copy(T_MNodeClass* mnc)
00316 {
00317     int j, k;
00318
00319     for (k = 0; k < nClasses; k++) {
00320         clist[k] = mnc->clist[k];
00321     }
00322     maxdeg    = mnc->maxdeg;
00323     for (j = 0; j < nNodes; j++) {
00324         ndcl[j] = mnc->ndcl[j];
00325         for (k = 0; k < nClasses; k++) {
00326             clmat[j][k] = mnc->clmat[j][k];
00327         }
00328     }
00329     for (k = 0; k < nClasses+1; k++) {
00330         flist[k] = mnc->flist[k];
00331     }
00332 }
00333
00334 // Construct flist
00335 // The set of nodes in class 'cl' is [flist[cl],...,flist[cl+1]-1]
00336 void T_MNodeClass::mkFlist(void)
00337 {
00338     int j, f;
00339
00340     f = 0;
00341     for (j = 0; j < nClasses; j++) {
00342         flist[j] = f;
00343         f += clist[j];
00344     }
00345     flist[nClasses] = f;
00346 }
00347
00348 // Construct ndcl
00349 // ndcl[nd] = (the class id in which node 'nd' belongs)
00350 void T_MNodeClass::mkNdCl(void)
00351 {
00352     int c, k;
00353     int nd = 0;
00354
00355     for (c = 0; c < nClasses; c++) {
00356         for (k = 0; k < clist[c]; k++) {
00357             ndcl[nd++] = c;
00358         }
00359     }

```

```

00360 }
00361
00362 // Comparison of two nodes 'nd0' and 'nd1'
00363 // Ordering is lexicographic (class, connection configuration)
00364 int T_MNodeClass::clCmp(int nd0, int nd1, int cn)
00365 {
00366
00367     // Whether two nodes are in a same class or not.
00368     int cmp = ndcl[nd0] - ndcl[nd1];
00369     if (cmp != 0) {
00370         return cmp;
00371     }
00372
00373     // Sign '-' signifies the reverse ordering
00374     cmp = - cmpArray(clmat[nd0], clmat[nd1], cn);
00375     if (cmp != 0) {
00376         return cmp;
00377     }
00378     // for particles ???
00379     return cmp;
00380 }
00381
00382 // Construct a matrix 'clmat[nd][tc]' which is the number
00383 // of edges connecting 'nd' and all nodes in class 'tc'.
00384 void T_MNodeClass::mkClMat(int **adjmat)
00385 {
00386     int nd, td, tc;
00387
00388     for (nd = 0; nd < nNodes; nd++) {
00389         for (td = 0; td < nNodes; td++) {
00390             tc = ndcl[td]; // another node
00391             clmat[nd][tc] += adjmat[nd][td]; // the number of edges 'nd'--'td'
00392         }
00393     }
00394 }
00395 }
00396
00397 // Increase the number of edges by 'val' between 'nd' and 'td'.
00398 void T_MNodeClass::incMat(int nd, int td, int val)
00399 {
00400     int tdc = ndcl[td]; // class of 'td'
00401     clmat[nd][tdc] += val; // modify matrix 'clmat'.
00402 }
00403
00404 // Check whether the configuration satisfies the ordering condition or not.
00405 Bool T_MNodeClass::chkOrd(int nd, int ndc, T_MNodeClass *cl, int *dtcl)
00406 {
00407     Bool tcl[MAXNCCLASSES];
00408     // Bool tcl[cl->nClasses];
00409     int tn, tc, mxn, cmp, n;
00410     DUMMYUSE(nd);
00411
00412     for (tc = 0; tc < cl->nClasses; tc++) {
00413         tcl[tc] = T_False;
00414     }
00415     for (tn = 0; tn < nNodes; tn++) {
00416         if (dtcl[tn] == 0) {
00417             tcl[cl->ndcl[tn]] = T_False;
00418         }
00419     }
00420     for (tc = 0; tc < cl->nClasses; tc++) {
00421         if (tcl[tc] && ndc != tc) {
00422             mxn = flist[tc+1];
00423             for (n = flist[tc]+1; n < mxn; n++) {
00424                 cmp = - clmat[n-1][tc] + clmat[n][tc];
00425                 if (cmp > 0) {
00426                     return T_False;
00427                 }
00428             }
00429         }
00430     }
00431     return T_True;
00432 }
00433
00434 // Print configuration matrix.
00435 void T_MNodeClass::printMat(void)
00436 {
00437     int j1, j2;
00438
00439     cout << endl;
00440
00441     // the first line
00442     cout << setw(2) << "nd" << ": " << setw(2) << "cl: ";
00443     for (j2 = 0; j2 < nClasses; j2++) {
00444         cout << setw(2) << j2 << " ";
00445     }
00446     cout << endl;

```

```

00447
00448 // print raw
00449 for (j1 = 0; j1 < nNodes; j1++) {
00450     cout << setw(2) << j1 << ": " << setw(2) << ndcl[j1] << ": [";
00451     for (j2 = 0; j2 < nClasses; j2++) {
00452         cout << " " << setw(2) << clmat[j1][j2];
00453     }
00454     cout << "]" << endl;
00455 }
00456 }
00457
00458 int T_MNodeClass::cmpArray(int *a0, int *a1, int ma)
00459 {
00460     for (int j = 0; j < ma; j++) {
00461         if (a0[j] < a1[j]) {
00462             return -1;
00463         } else if (a0[j] > a1[j]) {
00464             return 1;
00465         }
00466     }
00467     return 0;
00468 }
00469
00470 //=====
00471 // class T_MGraph : scalar graph expressed by matrix form
00472
00473 T_MGraph::T_MGraph(int pid, int ncl, int *cldeg, int *clnum, int *clex, Bool sopi)
00474 {
00475     int nn, ne, j, k;
00476
00477     // initial conditions
00478     nClasses = ncl;
00479     clist = new int[ncl];
00480
00481     mindeg = -1;
00482     maxdeg = -1;
00483     ne = 0;
00484     nn = 0;
00485     for (j = 0; j < nClasses; j++) {
00486         clist[j] = clnum[j];
00487         nn += clnum[j];
00488         ne += cldeg[j]*clnum[j];
00489         if (mindeg < 0) {
00490             mindeg = cldeg[j];
00491         } else {
00492             mindeg = min(mindeg, cldeg[j]);
00493         }
00494         if (maxdeg < 0) {
00495             maxdeg = cldeg[j];
00496         } else {
00497             maxdeg = max(maxdeg, cldeg[j]);
00498         }
00499     }
00500     if (ne % 2 != 0) {
00501         printf("Sum of degrees are not even\n");
00502         for (j = 0; j < nClasses; j++) {
00503             printf("class %2d: %2d %2d %2d\n",
00504                 j, cldeg[j], clnum[j], clex[j]);
00505         }
00506         erEnd("illegal degrees of nodes");
00507     }
00508     pId = pid;
00509     nNodes = nn;
00510     nodes = new T_MNode*[nNodes];
00511
00512     selOPI = sopi;
00513
00514     nEdges = ne / 2;
00515     nLoops = nEdges - nNodes + 1;
00516
00517     egraph = new T_EGraph(nNodes, nEdges, maxdeg);
00518     nn = 0;
00519     for (j = 0; j < nClasses; j++) {
00520         for (k = 0; k < clist[j]; k++, nn++) {
00521             nodes[nn] = new T_MNode(nn, cldeg[j], clex[j], j);
00522             egraph->setExtern(nn, clex[j]);
00523         }
00524     }
00525     egraph->endSetExtern();
00526
00527     // generated set of graphs
00528     ndiag = 0;
00529     nlPI = 0;
00530
00531     // the current graph
00532     adjMat = newMat(nNodes, nNodes, 0);
00533     nsym = ToBigInt(0);

```

```

00534     esym      = ToBigInt(0);
00535     clPI      = 0;
00536     wsum      = ToFraction(0, 1);
00537     wsopi     = ToFraction(0, 1);
00538
00539     // current node classification
00540     curcl     = new T_MNodeClass(nNodes, nClasses);
00541
00542     // measures of efficiency
00543     ngen      = 0;
00544     ngconn    = 0;
00545
00546     if (MONITOR) {
00547         nCallRefine    = 0;
00548         discardOrd     = 0;
00549         discardRefine  = 0;
00550         discardDisc    = 0;
00551         discardIso     = 0;
00552     }
00553
00554     // work space for isIsomorphic
00555     modmat     = newMat(nNodes, nNodes, 0);
00556     permp      = newArray(nNodes, 0);
00557     permq      = newArray(nNodes, 0);
00558     permr      = newArray(nNodes, 0);
00559
00560     // work space for bisearchM
00561     bidef      = newArray(nNodes, 0);
00562     bilow      = newArray(nNodes, 0);
00563     bicount    = 0;
00564     DUMMYUSE(padding);
00565
00566     #if DEBUGM
00567         printf("+++ new    T_MGraph %d\n", ++countMG);
00568         if(countEG > 100) { exit(1); }
00569     #endif
00570 }
00571
00572 T_MGraph::~T_MGraph()
00573 {
00574     int j;
00575
00576     deletArray(bilow);
00577     deletArray(bidef);
00578     deletArray(permr);
00579     deletArray(permq);
00580     deletArray(permp);
00581
00582     deleteMat(modmat, nNodes, nNodes);
00583     delete curcl;
00584     deleteMat(adjMat, nNodes, nNodes);
00585     delete egraph;
00586     for (j = 0; j < nNodes; j++) {
00587         delete nodes[j];
00588     }
00589     delete[] nodes;
00590     delete[] clist;
00591
00592     #if DEBUGM
00593         printf("+++ delete T_MGraph %d\n", countMG++);
00594     #endif
00595 }
00596
00597 void T_MGraph::printAdjMat(T_MNodeClass *cl)
00598 {
00599     int j1, j2;
00600
00601     cout << "      ";
00602     for (j2 = 0; j2 < nNodes; j2++) {
00603         cout << " " << setw(2) << j2;
00604     }
00605     cout << endl;
00606     for (j1 = 0; j1 < nNodes; j1++) {
00607         cout << setw(2) << j1 << ": [";
00608         for (j2 = 0; j2 < nNodes; j2++) {
00609             cout << " " << setw(2) << adjMat[j1][j2];
00610         }
00611         cout << "]" << cl->ndcl[j1] << endl;
00612     }
00613 }
00614 }
00615
00616 //-----
00617 // Check graph can be a connected one.
00618 // If a connected component without free leg is not the whole graph then
00619 // return T_False, otherwise return T_True.
00620 Bool T_MGraph::isConnected(void)

```

```

00621 {
00622     int j, n, nv;
00623
00624     for (j = 0; j < nNodes; j++) {
00625         nodes[j]->visited = -1;
00626     }
00627     if (visit(0)) {
00628         return T_True;
00629     }
00630     nv = 0;
00631     for (n = 0; n < nNodes; n++) {
00632         if (nodes[n]->visited >= 0) {
00633             nv++;
00634         }
00635     }
00636     return (nv == nNodes);
00637 }
00638
00639 // Visiting connected node used for 'isConnected'
00640 // If child nodes has free legs, then this function returns T_True.
00641 // otherwise it returns T_False.
00642 Bool T_MGraph::visit(int nd)
00643 {
00644     int td;
00645
00646     // This node has free legs.
00647     if (nodes[nd]->freelg > 0) {
00648         return T_True;
00649     }
00650     nodes[nd]->visited = 0;
00651     for (td = 0; td < nNodes; td++) {
00652         if ((adjMat[nd][td] > 0) and (nodes[td]->visited < 0)) {
00653             if (visit(td)) {
00654                 return T_True;
00655             }
00656         }
00657     }
00658     // all the child nodes has no free legs.
00659     return T_False;
00660 }
00661
00662 // Check whether the current graph is the Representative of a isomorphic class.
00663 // nsym = symmetry factor by the permutation of nodes.
00664 // esym = symmetry factor by the permutation of edge.
00665 // If this graph is not a representative, then returns T_False.
00666 Bool T_MGraph::isIsomorphic(T_MNodeClass *cl)
00667 {
00668     int j1, j2, cmp, count, nself;
00669
00670     nsym = ToBigInt(0);
00671     esym = ToBigInt(1);
00672
00673     count = 0;
00674     while (T_True) {
00675         count = nextPerm(nNodes, cl->nClasses, cl->clist,
00676             permr, permq, permp, count);
00677
00678         if (count < 0) {
00679             // calculate permutations of edges
00680             esym = ToBigInt(1);
00681             for (j1 = 0; j1 < nNodes; j1++) {
00682                 if (adjMat[j1][j1] > 0) {
00683                     nself = adjMat[j1][j1]/2;
00684                     esym *= factorial(nself);
00685                     esym *= ipow(2, nself);
00686                 }
00687                 for (j2 = j1+1; j2 < nNodes; j2++) {
00688                     if (adjMat[j1][j2] > 0) {
00689                         esym *= factorial(adjMat[j1][j2]);
00690                     }
00691                 }
00692             }
00693             return T_True;
00694         }
00695
00696         permMat(nNodes, permp, adjMat, modmat);
00697         cmp = compMat(nNodes, adjMat, modmat);
00698         if (cmp < 0) {
00699             return T_False;
00700         } else if (cmp == 0) {
00701             // save permutation ???
00702             nsym = nsym + ToBigInt(1);
00703         }
00704     }
00705 }
00706
00707 // apply permutation to matrix 'mat0' and obtain 'mat1'

```

```

00708 void T_MGraph::permMat(int size, int *perm, int **mat0, int **mat1)
00709 {
00710     int j1, j2;
00711     for (j1 = 0; j1 < size; j1++) {
00712         for (j2 = 0; j2 < size; j2++) {
00713             mat1[j1][j2] = mat0[perm[j1]][perm[j2]];
00714         }
00715     }
00716 }
00717 }
00718
00719 // comparison of matrix
00720 int T_MGraph::compMat(int size, int **mat0, int **mat1)
00721 {
00722     int j1, j2, cmp;
00723     for (j1 = 0; j1 < size; j1++) {
00724         for (j2 = 0; j2 < size; j2++) {
00725             cmp = mat0[j1][j2] - mat1[j1][j2];
00726             if (cmp != 0) {
00727                 return cmp;
00728             }
00729         }
00730     }
00731     return 0;
00732 }
00733 }
00734
00735 // Refine the classification
00736 // cl : the current 'T_MNodeClass' object
00737 // cn : the class number
00738 // Returns (the new class number corresponds to 'cn') if OK, or
00739 // 'None' if ordering condition is not satisfied
00740 T_MNodeClass *T_MGraph::refineClass(T_MNodeClass *cl, int cn)
00741 {
00742     T_MNodeClass *ccl = cl;
00743     int ccn = cn;
00744     T_MNodeClass *ncl = NULL;
00745     int ucl[MAXNODES];
00746     int nucl, nce;
00747     int td, cmp;
00748
00749     nucl = 0;
00750     while (ccl->nClasses != nucl) { // repeat refinement.
00751         nce = 0;
00752         nucl = 0;
00753         for (td = 1; td < nNodes; td++) {
00754             // 'td' is the next node and the current node is 'td-1'.
00755             // Count up the number of the elements in the current class
00756             // corresponding to the current node
00757             nce++;
00758             cmp = ccl->clCmp(td-1, td, ccn);
00759
00760             // the ordering condition is not satisfied.
00761             if (cmp > 0) {
00762                 if (DEBUG) {
00763                     cout << "refine: cls = " << ccl->clist << endl;
00764                     ccl->printMat();
00765                     cout << "clmat" << endl;
00766                     ccl->printMat();
00767                     cout << "refine: discard: cls = " << ccl->clist
00768                         << "ucl = " << ucl << endl;
00769                 }
00770                 if (ccl != cl) {
00771                     delete ccl;
00772                 }
00773                 return NULL;
00774             }
00775             else if (cmp < 0) {
00776                 // 'td' is in the next class to the current node.
00777                 ucl[nucl++] = nce; // close the current class
00778
00779                 // start new class
00780                 nce = 0;
00781             }
00782             // nothing to do for the case of 'cmp == 0'.
00783         }
00784     }
00785
00786     // close array 'ucl'.
00787     ucl[nucl++] = nce + 1;
00788
00789     // class is not modified
00790     if (nucl == ccl->nClasses) {
00791         ncl = ccl;
00792         break;
00793     }
00794 }

```



```

00795         // inconsistent
00796     } else if (nucl < ccl->nClasses) {
00797         erEnd("refineClasses : smaller number of classes");
00798
00799         // preparation of the next repetition.
00800     } else {
00801         if (cn == ccl->nClasses) {
00802             td = nNodes;
00803         } else {
00804             td = ccl->flist[cn+1]-1;
00805         }
00806         if (ccl != cl) {
00807             delete ccl;
00808         }
00809         ccl = new T_MNodeClass(nNodes, nucl);
00810         ccl->init(ucl, maxdeg, adjMat);
00811         if (td == nNodes) {
00812             ccn = ccl->nClasses;
00813         } else {
00814             ccn = ccl->ndcl[td];
00815         }
00816         nucl = 0;
00817     }
00818 }
00819
00820 if (DEBUG) {
00821     cout << "refine: ucl = " << ucl << endl;
00822     cout << "refine: ncl = " << ncl->clist << endl;
00823     ncl->printMat();
00824 }
00825
00826 return ncl;
00827 }
00828
00829 // Search biconnected component
00830 // visit : pd --> nd --> td
00831 // ne : the number of edges between pd and nd.
00832 void T_MGraph::bisearchM(int nd, int pd, int ne)
00833 {
00834     int td;
00835
00836     bidef[nd] = bicount;
00837     bilow[nd] = bicount;
00838     bicount++;
00839
00840     for (td = 0; td < nNodes; td++) {
00841         if (nodes[td]->ext) { // ignore external node
00842             continue;
00843         }
00844         else if (td == nd) { // pd --> nd --> nd
00845             continue;
00846         }
00847         else if (td == pd) { // pd --> nd --> pd
00848             if (ne > 1) {
00849                 bilow[nd] = min(bilow[nd], bidef[pd]);
00850             }
00851         }
00852         else if (adjMat[td][nd] < 1) { // td is not adjacent to nd
00853             continue;
00854         }
00855         else if (bidef[td] >= 0) { // back edge
00856             bilow[nd] = min(bilow[nd], bidef[td]);
00857         }
00858         // new node
00859     } else {
00860         bisearchM(td, nd, adjMat[td][nd]);
00861
00862         // ordinary case
00863         if (bilow[td] > bidef[nd]) {
00864             nBridges++;
00865         }
00866         bilow[nd] = min(bilow[nd], bilow[td]);
00867     }
00868 }
00869 }
00870
00871 // nd is the starting point and not an external line
00872 // if (pd < 0 && (!nodes[nd]->ext || nodes[nd]->deg > 1)) {
00873 // if (pd < 0 && !nodes[nd]->ext && nodes[nd]->deg == 1) {
00874 if (pd < 0 && nodes[nd]->deg != 1) {
00875     // nBridges += nodes[nd]->deg;
00876     nBridges++;
00877 }
00878 }
00879
00880 // Count the number of lPI components.
00881 // The algorithm is described in

```

```

00882 // A.V. Aho, J.E. Hopcroft and J.D. Ullman
00883 // 'The Design and Analysis of Computer Algorithms', Chap. 5
00884 // 1974, Addison-Wesley.
00885
00886 int T_MGraph::count1PI(void)
00887 {
00888     int j;
00889
00890     if (nLoops < 0) {
00891         return 1;
00892     }
00893
00894     // initialization
00895     bicount = 0;
00896     nBridges = 0;
00897     for (j = 0; j < nNodes; j++) {
00898         bidef[j] = -1;
00899         bilow[j] = -1;
00900     }
00901
00902     bisearchM(0, -1, 0);
00903
00904     return nBridges;
00905 }
00906
00907 //-----
00908 // Generate graphs
00909 // the generation process starts from 'connectClass'.
00910
00911 long T_MGraph::generate(void)
00912 {
00913     T_MNodeClass *cl;
00914     int dscl[MAXNODES];
00915     int n;
00916
00917     for (n = 0; n < nNodes; n++) {
00918         dscl[n] = T_False;
00919     }
00920
00921     // Initial classification of nodes.
00922     cl = new T_MNodeClass(nNodes, nClasses);
00923     cl->init(clist, maxdeg, adjMat);
00924     connectClass(cl, dscl);
00925
00926     // Print the result.
00927
00928     if (MONITOR) {
00929         cout << endl;
00930         cout << endl;
00931         cout << "* Total " << ndiag << " Graphs.";
00932         cout << "(" << n1PI << " 1PI)";
00933         // cout << " wsum = " << wsum << "(" << wsopi << "1PI)" << endl;
00934         cout << endl;
00935     }
00936
00937     if (MONITOR) {
00938         cout << "* refine: " << nCallRefine << endl;
00939         cout << "* discard for ordering: " << discardOrd << endl;
00940         cout << "* discard for refinement: " << discardRefine << endl;
00941         cout << "* discard for disconnected: " << discardDisc << endl;
00942         cout << "* discard for duplication: " << discardIso << endl;
00943     }
00944     delete cl;
00945
00946     return ndiag;
00947 }
00948
00949 int T_MGraph::findNextCl(T_MNodeClass *cl, int *dscl)
00950 {
00951     int mine, cr, c, n, me;
00952
00953     mine = -1;
00954     cr = -1;
00955     for (c = 0; c < cl->nClasses; c++) {
00956         n = cl->flist[c];
00957         if (!dscl[n]) {
00958             me = nodes[n]->freelg;
00959             if (me > 0) {
00960                 if (nodes[n]->freelg < nodes[n]->deg) {
00961                     return c;
00962                 }
00963                 if (mine < 0 || mine > me) {
00964                     mine = me;
00965                     cr = c;
00966                 }
00967             }
00968         }
00969     }

```

```

00969     }
00970     return cr;
00971 }
00972
00973 int T_MGraph::findNextTC1(T_MNodeClass *cl, int *dtcl)
00974 {
00975     int c, n, mine, cr, me;
00976
00977     mine = -1;
00978     cr = -1;
00979     for (c = 0; c < cl->nClasses; c++) {
00980         for (n = cl->flist[c]; n < cl->flist[c+1]; n++) {
00981             if (!dtcl[n]) {
00982                 me = nodes[n]->freelg;
00983                 if (me > 0) {
00984                     if (nodes[n]->freelg < nodes[n]->deg) {
00985                         return c;
00986                     }
00987                     if (mine < 0 || mine > me) {
00988                         mine = me;
00989                         cr = c;
00990                     }
00991                 }
00992             }
00993         }
00994     }
00995     return cr;
00996 }
00997
00998 // Connect nodes in a class to others
00999 void T_MGraph::connectClass(T_MNodeClass *cl, int *dscl)
01000 {
01001     int sc, sn;
01002     T_MNodeClass *xcl;
01003
01004     if (DEBUG0) {
01005         printf("connectClass:begin:");
01006         printf(" dscl="); printArray(nNodes, dscl);
01007         printf("\n");
01008     }
01009     xcl = refineClass(cl, cl->nClasses);
01010
01011     if (xcl == NULL) {
01012         if (MONITOR) {
01013             discardRefine++;
01014         }
01015     } else {
01016         sc = findNextCl(xcl, dscl);
01017         if (sc < 0) {
01018             newGraph(cl);
01019         } else {
01020             sn = xcl->flist[sc];
01021             connectNode(sc, sn, xcl, dscl);
01022         }
01023     }
01024     if (xcl != cl && xcl != NULL) {
01025         delete xcl;
01026     }
01027     if (DEBUG0) {
01028         printf("connectClass:end\n");
01029     }
01030 }
01031
01032 //-----
01033 void T_MGraph::connectNode(int sc, int ss, T_MNodeClass *cl, int *dscl)
01034 {
01035     int sn;
01036     int dtcl[MAXNODES];
01037
01038     if (DEBUG0) {
01039         printf("connectNode:begin:(%d,%d)", sc, ss);
01040         printf(" dscl="); printArray(nNodes, dscl);
01041         printf("\n");
01042     }
01043     if (ss >= cl->flist[sc+1]) {
01044         connectClass(cl, dscl);
01045         if (DEBUG0) {
01046             printf("connectNode:endl\n");
01047         }
01048         return;
01049     }
01050     copyArray(nNodes, dscl, dtcl);
01051     for (sn = ss; sn < cl->flist[sc+1]; sn++) {
01052         if (!dscl[sn]) {
01053             connectLeg(sc, sn, sc, sn, cl, dscl, dtcl);
01054             if (DEBUG0) {

```

```

01056         printf("connectNode:end2\n");
01057     }
01058     return;
01059 }
01060 }
01061 if (DEBUG0) {
01062     printf("connectNode:end3\n");
01063 }
01064 }
01065
01066 // Add one connection between two legs.
01067 // 1. select another node to connect
01068 // 2. determine multiplicity of the connection
01069 //
01070 // Arguments
01071 //   cn : the current class
01072 //   nd : the current node to be connected.
01073 //   nextnd : {nextnd, ...} is the possible target node of the connection.
01074 //   cl : the current node class
01075
01076 void T_MGraph::connectLeg(int sc, int sn, int tc, int ts, T_MNodeClass *cl, int *dscl, int* dtcl)
01077 {
01078     int tn, maxself, nc2, nc, maxcon, ts1, wc, ncm;
01079     int dtcl1[MAXNODES];
01080
01081     if (DEBUG0) {
01082         printf("connectLeg:begin:(%d,%d,%d,%d)", sc, sn, tc, ts);
01083         printf(" dscl="); printArray(nNodes, dscl);
01084         printf(" dtcl="); printArray(nNodes, dtcl);
01085         printf("\n");
01086         printAdjMat(cl);
01087     }
01088
01089     if (sn >= cl->flist[sc+1]) {
01090         erEnd("*** connectLeg : illegal control");
01091         return;
01092     }
01093     // There remains no free legs in the node 'sn' : move to next node.
01094     } else if (nodes[sn]->freelg < 1) {
01095
01096         if (!isConnected()) {
01097             if (DEBUG0) {
01098                 printf("connectLeg:disconnected\n");
01099             }
01100             if (MONITOR) {
01101                 discardDisc++;
01102             }
01103         } else {
01104             if (DEBUG0) {
01105                 printf("connectLeg: call conNode\n");
01106             }
01107             dscl[sn] = T_True;
01108
01109             // next node in the current class.
01110             connectNode(sc, sn+1, cl, dscl);
01111
01112             dscl[sn] = T_False;
01113         }
01114
01115         // connect a free leg of the current node 'sn'.
01116     } else {
01117         copyArray(nNodes, dtcl, dtcl1);
01118
01119         ts1 = ts;
01120         for (wc = 0; wc < nNodes; wc++) {
01121             if (ts1 >= cl->flist[tc+1]) {
01122                 tc = findNextTCl(cl, dtcl1);
01123                 if (DEBUG0) {
01124                     printf("connectLeg:1:tc=%d\n", tc);
01125                 }
01126                 if (tc < 0) {
01127                     if (DEBUG0) {
01128                         printf("connectLeg:end1:(%d,%d,%d,%d)\n", sc, sn, tc, ts);
01129                     }
01130                     return;
01131                 }
01132                 if (tc != sc && !cl->chkOrd(sn, sc, cl, dtcl)) {
01133                     if (MONITOR) {
01134                         discardOrd++;
01135                     }
01136                     if (DEBUG0) {
01137                         printf("connectLeg:end2:(%d,%d,%d,%d)\n", sc, sn, tc, ts);
01138                     }
01139                     return;
01140                 }
01141             }
01142         }

```

```

01143     tsl = -1;
01144
01145     // repeat for all possible target nodes
01146     // for all tn in tc
01147     if (DEBUG0) {
01148         printf("connectLeg:2:tc=%d, fl:%d-->%d\n", tc, cl->flist[tc], cl->flist[tc+1]);
01149     }
01150     for (tn = cl->flist[tc]; tn < cl->flist[tc+1]; tn++) {
01151         if (DEBUG0) {
01152             printf("connectLeg:2:%d=>try %d\n", sn, tn);
01153         }
01154
01155         if (dtcll[tn]) {
01156             if (DEBUG0) {
01157                 printf("connectLeg:3\n");
01158             }
01159             continue;
01160         }
01161         dtcll[tn] = T_True;
01162
01163         if (sc == tc && sn > tn) {
01164             if (DEBUG0) {
01165                 printf("connectLeg:4\n");
01166             }
01167             continue;
01168
01169             // self-loop
01170         } else if (sn == tn) {
01171             if (nNodes > 1) {
01172                 // there are two or more nodes in the graph :
01173                 // avoid disconnected graph
01174                 maxself = min((nodes[sn]->freelg)/2, (nodes[sn]->deg-1)/2);
01175             } else {
01176                 // there is only one node the graph.
01177                 maxself = nodes[sn]->freelg/2;
01178             }
01179
01180             // If we can assume no tadpole, the following line can be used.
01181             if (selOPI and nNodes > 2) {
01182                 maxself = min((nodes[sn]->deg-2)/2, maxself);
01183             }
01184
01185             // vary the number of connection.
01186             for (nc2 = maxself; nc2 > 0; nc2--) {
01187                 // if nNodes > 1 and ndg == nc2:
01188                 // // disconnected
01189                 // continue
01190                 nc = 2*nc2;
01191                 if (DEBUG0) {
01192                     printf("connectLeg: call conLeg: (same) %d=>%d(%d)\n", sn, tn, nc);
01193                 }
01194                 ncm = 5*nc;
01195                 adjMat[sn][sn] = nc;
01196                 nodes[sn]->freelg -= nc;
01197                 cl->incMat(sn, tn, ncm);
01198                 tsl = tn + 1;
01199
01200                 // next connection
01201                 connectLeg(sc, sn, tc, tsl, cl, dscl, dtcll);
01202
01203                 // restore the configuration
01204                 cl->incMat(tn, sn, -ncm);
01205                 adjMat[sn][sn] = 0;
01206                 nodes[sn]->freelg += nc;
01207                 if (DEBUG0) {
01208                     printf("connectLeg: ret conLeg: (same) %d=>%d(%d)\n", sn, tn, nc);
01209                 }
01210             }
01211
01212             // connections between different nodes.
01213         } else {
01214             // maximum possible connection number
01215             maxcon = min(nodes[sn]->freelg, nodes[tn]->freelg);
01216
01217             // avoid disconnected graphs.
01218             if (nNodes > 2 && nodes[sn]->deg == nodes[tn]->deg) {
01219                 maxcon = min(maxcon, nodes[sn]->deg-1);
01220             }
01221
01222             if (CHECK) {
01223                 if ((adjMat[sn][tn] != 0) || (adjMat[sn][tn] != adjMat[tn][sn])) {
01224                     printf("*** inconsistent connection: sn=%d, tn=%d", sn, tn);
01225                     printf(" dscl="); printArray(nNodes, dscl);
01226                     printf(" dtcl="); printArray(nNodes, dtcl);
01227                     printf("\n");
01228                     printAdjMat(cl);
01229                     erEnd("*** inconsistent connection ");

```

```

01230         }
01231     }
01232
01233     // vary number of connections
01234     for (nc = maxcon; nc > 0; nc--) {
01235         if (DEBUG0) {
01236             printf("connectLeg: call conLeg: (diff) %d=>%d(%d)", sn, tn, nc);
01237             printf(" dtcl="); printArray(nNodes, dtcl);
01238             printf("\n");
01239         }
01240         adjMat[sn][tn] = nc;
01241         adjMat[tn][sn] = nc;
01242         nodes[sn]->freelg -= nc;
01243         nodes[tn]->freelg -= nc;
01244         cl->incMat(sn, tn, nc);
01245         cl->incMat(tn, sn, nc);
01246         ts1 = tn + 1;
01247
01248         // next connection
01249         connectLeg(sc, sn, tc, ts1, cl, dscl, dtcl1);
01250
01251         // restore configuration
01252         cl->incMat(sn, tn, -nc);
01253         cl->incMat(tn, sn, -nc);
01254         adjMat[sn][tn] = 0;
01255         adjMat[tn][sn] = 0;
01256         nodes[sn]->freelg += nc;
01257         nodes[tn]->freelg += nc;
01258         if (DEBUG0) {
01259             printf("connectLeg: ret conLeg: (diff) %d=>%d(%d)\n", sn, tn, nc);
01260             printf(" dtcl="); printArray(nNodes, dtcl);
01261             printAdjMat(cl);
01262             printf("\n");
01263         }
01264     }
01265 }
01266 }
01267 if (ts1 < 0) {
01268     ts1 = cl->flist[tc+1];
01269 }
01270 } // for wc
01271 }
01272 if (DEBUG0) {
01273     printf("connectLeg:end3: (%d,%d,%d,%d)\n", sc, sn, tc, ts);
01274 }
01275 }
01276
01277 // A new candidate diagram is obtained.
01278 // It may be a disconnected graph
01279 void T_MGraph::newGraph(T_MNodeClass *cl)
01280 {
01281     int connected;
01282     T_MNodeClass *xcl;
01283     Bool sopi;
01284
01285     ngen++;
01286     // printf("newGraph: %d\n", ngen);
01287
01288     // refine class and check ordering condition
01289     xcl = refineClass(cl, cl->nClasses);
01290     if (xcl == NULL) {
01291         // printf("newGraph: fail refine\n");
01292         if (MONITOR) {
01293             discardRefine++;
01294         }
01295     }
01296
01297     // check whether this is a connected graph or not.
01298 } else {
01299     connected = isConnected();
01300     if (!connected) {
01301         // printf("newGraph: not connected\n");
01302         if (DEBUG0) {
01303             cout << "+++ disconnected graph" << ngen << endl;
01304             xcl->printMat();
01305         }
01306
01307         if (MONITOR) {
01308             discardDisc++;
01309         }
01310
01311         // connected graph : check isomorphism of the graph
01312     } else {
01313         ngconn++;
01314         if (!isIsomorphic(xcl)) {
01315             // printf("newGraph: not isomorphic\n");
01316             if (DEBUG) {

```

```

01317         cout << "+++ duplicated graph" << ngen << ngconn << endl;
01318         xcl->printMat();
01319     }
01320
01321     if (MONITOR) {
01322         discardIso++;
01323     }
01324
01325     // We got a new connected and a unique representation of a class.
01326 } else {
01327
01328     clPI = countlPI();
01329     if (!selOPI || clPI == 1) {
01330         wsum = wsum + ToFraction(1, nsym*esym);
01331         if (clPI == 1) {
01332             wsopi = wsopi + ToFraction(1, nsym*esym);
01333         }
01334         curcl->copy(xcl);
01335         ndiag++;
01336         sopi = (clPI == 1);
01337         if (sopi) {
01338             nlPI++;
01339         }
01340
01341         if (OPTPRINT) {
01342             cout << endl;
01343             cout << "Graph : " << ndiag
01344                  << "(" << ngen << ")"
01345                  << " lPI comp. = " << clPI
01346                  << " sym. factor = (" << nsym << "*" << esym << ")"
01347                  << endl;
01348             printAdjMat(cl);
01349             // cl->printMat();
01350             if (MONITOR) {
01351                 cout << "refine: " << nCallRefine << endl;
01352                 cout << "discard for ordering: " << discardOrd << endl;
01353                 cout << "discard for refinement: " << discardRefine << endl;
01354                 cout << "discard for disconnected: " << discardDisc << endl;
01355                 cout << "discard for duplication: " << discardIso << endl;
01356             }
01357         }
01358
01359         // go to next step
01360         egraph->init(pid, ndiag, adjMat, sopi, nsym, esym);
01361         toForm(egraph);
01362     }
01363 }
01364 }
01365 }
01366 // printf("in newGraph cl=%p, xcl=%p\n", cl, xcl);
01367 if (xcl != cl && xcl != NULL) {
01368     delete xcl;
01369 }
01370 }
01371
01372 // go to next step
01373 // 1. convert data format which treat the edges as objects.
01374 // 2. definition of loop momenta to the edges.
01375 // 3. analysis of loop structure in a graph.
01376 // 4. assignment of particles to edges and vertices to nodes
01377 // 5. recalculate symmetry factor
01378
01379 // Permutation
01380 Local int nextPerm(int nelem, int nclass, int *cl, int *r, int *q, int *p, int count)
01381 {
01382     int j, k, n, e, t;
01383     Bool b;
01384
01385     for (j = 0; j < nelem; j++) {
01386         p[j] = j;
01387     }
01388     if (count < 1) {
01389         for (j = 0; j < nelem; j++) {
01390             q[j] = 0;
01391             r[j] = 0;
01392         }
01393         j = 0;
01394         for (k = 0; k < nclass; k++) {
01395             n = cl[k];
01396             for (e = 0; e < n; e++) {
01397                 r[j] = n - e - 1;
01398                 j++;
01399             }
01400         }
01401     }
01402     if (j != nelem) {
01403         erEnd("*** inconsistent # elements");

```

```

01404     }
01405     return 1;
01406 }
01407 b = T_False;
01408 for (j = nelem-1; j >= 0; j--) {
01409     if (q[j] < r[j]) {
01410         for (k = j+1; k < nelem; k++) {
01411             q[k] = 0;
01412         }
01413         q[j]++;
01414         b = T_True;
01415         break;
01416     }
01417 }
01418 if (!b) {
01419     return (-count);
01420 }
01421
01422 for (j = 0; j < nelem; j++) {
01423     k = j + q[j];
01424     t = p[j];
01425     p[j] = p[k];
01426     p[k] = t;
01427 }
01428 return count + 1;
01429 }
01430
01431 Local BigInt factorial(int n)
01432 /* return (n < 1) ? 1 : n!
01433 */
01434 {
01435     int r, j;
01436
01437     r = 1;
01438     for (j = 2; j <= n; j++) {
01439         r *= j;
01440     }
01441     return r;
01442 }
01443
01444 Local BigInt ipow(int n, int p)
01445 {
01446     int r, j;
01447     DUMMYUSE(p);
01448
01449     r = 1;
01450     for (j = 2; j <= n; j++) {
01451         r *= n;
01452     }
01453     return r;
01454 }
01455
01456
01457 Local void erEnd(const char *msg)
01458 {
01459     printf("*** Error : %s\n", msg);
01460     exit(1);
01461 }
01462
01463 /* memory allocation */
01464 Local int *newArray(int size, int val)
01465 {
01466     int *a, j;
01467
01468     a = new int[size];
01469     for (j = 0; j < size; j++) {
01470         a[j] = val;
01471     }
01472     return a;
01473 }
01474
01475 Local void deletArray(int *a)
01476 {
01477     delete[] a;
01478 }
01479
01480 Local void copyArray(int size, int *a0, int *a1)
01481 {
01482     int j;
01483     for (j = 0; j < size; j++) {
01484         a1[j] = a0[j];
01485     }
01486 }
01487
01488 Local int **newMat(int n0, int n1, int val)
01489 {
01490     int **m, j;

```



```

01491
01492     m = new int*[n0];
01493     for (j = 0; j < n0; j++) {
01494         m[j] = newArray(n1, val);
01495     }
01496     return m;
01497 }
01498
01499 Local void deleteMat(int **m, int n0, int n1)
01500 {
01501     int j;
01502     DUMMYUSE(n1);
01503
01504     for (j = 0; j < n0; j++) {
01505         deletArray(m[j]);
01506     }
01507     delete[] m;
01508 }
01509
01510 //=====
01511 // Functions for testing the program.
01512 //
01513 //-----
01514 // Testing function nextPerm
01515 //
01516 Local void printArray(int n, int *p)
01517 {
01518     int j;
01519
01520     printf("[");
01521     for (j = 0; j < n; j++) {
01522         printf(" %2d", p[j]);
01523     }
01524     printf("]");
01525 }
01526
01527 Local void printMat(int n0, int n1, int **m)
01528 {
01529     int j;
01530
01531     for (j = 0; j < n0; j++) {
01532         printArray(n1, m[j]);
01533         printf("\n");
01534     }
01535 }
01536
01537 Global void testPerm()
01538 {
01539     int nelelem, nperm, nclist, n, count;
01540     int *p, *q, *r;
01541     int clist[] = {1, 2, 2, 3};
01542
01543     nclist = sizeof(clist)/sizeof(int);
01544     nelelem = 0;
01545     nperm = 1;
01546     for (n = 0; n < nclist; n++) {
01547         nelelem += clist[n];
01548         nperm *= factorial(clist[n]);
01549     }
01550
01551     printf("+++ clist = (%d) ", nclist);
01552     printArray(nclist, clist);
01553     printf("\n");
01554     printf("+++ nelelem = %d, nperm = %d\n", nelelem, nperm);
01555
01556     p = new int[nelelem];
01557     q = new int[nelelem];
01558     r = new int[nelelem];
01559     count = 0;
01560     while (T_True) {
01561         count = nextPerm(nelelem, nclist, clist, r, q, p, count);
01562         if (count < 0) {
01563             count = -count;
01564             break;
01565         }
01566         printf("%4d:", count);
01567         printArray(nelelem, p);
01568         printf("\n");
01569
01570         if (count > nperm) {
01571             break;
01572         }
01573     }
01574     if (count != nperm) {
01575         printf("*** %d != %d\n", count, nperm);
01576     }
01577     delete[] p;

```

```

01578     delete[] q;
01579     delete[] r;
01580 }
01581
01582 // } } ]
01583

```

4.58 gentopo.h

```

00001 #pragma once
00002
00003 // Temporal definition of big integer
00004 #define BigInt long
00005 #define ToBigInt(x) ((BigInt) (x))
00006 //
00007 // Temporal definition of ratio of two big integers
00008 #define Fraction double
00009 #define ToFraction(x, y) (((double) (x))/((double) (y)))
00010
00011 //=====
00012 // Output to FROM
00013
00014 //=====
00015 // class of nodes for T_EGraph
00016
00017 class T_ENode {
00018 public:
00019     int deg;
00020     int ext;
00021     int *edges;
00022 };
00023
00024 class T_EEdge {
00025 public:
00026     int nodes[2];
00027     int ext;
00028     int momn;
00029     char momc[2]; // no more used
00030     // momentum is printed like: ("%s%d", (enode.ext)?"Q":"p", enode.momn)
00031     char padding[6];
00032 };
00033
00034 class T_EGraph {
00035 public:
00036     long gId;
00037     int pId;
00038     int nNodes;
00039     int nEdges;
00040     int maxdeg;
00041     int nExtern;
00042
00043     int opi;
00044     BigInt nsym, esym;
00045
00046     T_ENode *nodes;
00047     T_EEdge *edges;
00048
00049     T_EGraph(int nnodes, int nedges, int mxdeg);
00050     ~T_EGraph();
00051     void print(void);
00052     void init(int pid, long gid, int **adjmat, int sopi, BigInt nsym, BigInt esym);
00053
00054     void setExtern(int nd, int val);
00055     void endSetExtern(void);
00056 };
00057
00058 //=====
00059 // class of nodes for T_MGraph
00060
00061 class T_MNode {
00062 public:
00063     int id; // node id
00064     int deg; // degree(node) = the number of legs
00065     int cls; // initial class number in which the node belongs
00066     int ext;
00067
00068     int freelg; // the number of free legs
00069     int visited;
00070
00071     T_MNode(int id, int deg, int ext, int cls);
00072 };
00073
00074 //=====

```

```

00075 // class of node-classes for T_MGraph
00076 class T_MNodeClass;
00077
00078 //=====
00079 // class of scalar graph expressed by matrix form
00080 //
00081 // Input : the classified set of nodes.
00082 // Output : control passed to 'T_EGraph(self)'
00083
00084 class T_MGraph {
00085
00086 public:
00087
00088     // initial conditions
00089     int pId;           // process/subprocess ID
00090     int nNodes;        // the number of nodes
00091     int nEdges;        // the number of edges
00092     int nLoops;        // the number of loops
00093     T_MNode **nodes;   // table of T_MNode object
00094     int *clist;        // list of initial classes
00095     int nClasses;      // the number of initial classes
00096     // int ndcl;        // node --> initial class number
00097     int mindeg;        // minimum value of degree of nodes
00098     int maxdeg;        // maximum value of degree of nodes
00099
00100     int selOPI;        // flag to select lPI graphs
00101
00102     // generated set of graphs
00103     long ndiag;        // the total number of generated graphs
00104     long nlPI;         // the total number of lPI graphs
00105     int nBridges;      // the number of bridges
00106
00107     // the current graph
00108     int clPI;          // the number of lPI components
00109     int **adjMat;      // adjacency matrix
00110     BigInt nsym;       // symmetry factor from nodes
00111     BigInt esym;       // symmetry factor from edges
00112     Fraction wsum;     // weighted sum of graphs
00113     Fraction wsopi;    // weighted sum of lPI graphs
00114     T_MNodeClass *curcl; // the current 'T_MNodeClass' object
00115     T_EGraph *egraph;
00116
00117     // measures of efficiency
00118     long ngen;         // generated graph before check
00119     long ngconn;       // generated connected graph before check
00120
00121     long nCallRefine;
00122     long discardOrd;
00123     long discardRefine;
00124     long discardDisc;
00125     long discardIso;
00126
00127     // functions */
00128     T_MGraph(int pid, int ncl, int *cldeg, int *clnum, int *clext, int sopi);
00129     ~T_MGraph();
00130     long generate(void);
00131
00132 private:
00133     // work space for isomorphism
00134     int **modmat;      // permutated adjacency matrix
00135     int *permp;
00136     int *permq;
00137     int *permr;
00138
00139     // work space for biconnected component
00140     int *bidef;
00141     int *bilow;
00142     int bicount;
00143     int padding;
00144
00145     void printAdjMat(T_MNodeClass *cl);
00146     int isConnected(void);
00147     int visit(int nd);
00148     int isIsomorphic(T_MNodeClass *cl);
00149     void permMat(int size, int *perm, int **mat0, int **mat1);
00150     int compMat(int size, int **mat0, int **mat1);
00151     T_MNodeClass *refineClass(T_MNodeClass *cl, int cn);
00152     void bisearchM(int nd, int pd, int ne);
00153     int countlPI(void);
00154
00155     int findNextCl(T_MNodeClass *cl, int *dscl);
00156     int findNextTCl(T_MNodeClass *cl, int *dcl);
00157     void connectClass(T_MNodeClass *cl, int *dscl);
00158     void connectNode(int sc, int ss, T_MNodeClass *cl, int *dscl);
00159     void connectLeg(int sc, int sn, int tc, int ts, T_MNodeClass *cl, int *dscl, int* dtcl);
00160     void newGraph(T_MNodeClass *cl);
00161

```

```
00162 };
```

4.59 grcc.cc

```
00001 // { ( [
00002 //*****
00003 // grcc.cc
00004
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 2023-2026 T. Kaneko
00008 *   When using this file you are requested to refer to the publication
00009 *   Comput.Phys.Commun. 92 (1995) 127-152
00010 *
00011 *   This file is part of FORM.
00012 *
00013 *   FORM is free software: you can redistribute it and/or modify it under the
00014 *   terms of the GNU General Public License as published by the Free Software
00015 *   Foundation, either version 3 of the License, or (at your option) any later
00016 *   version.
00017 *
00018 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00019 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00020 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00021 *   details.
00022 *
00023 *   You should have received a copy of the GNU General Public License along
00024 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00025 */
00026 /* #[ License : */
00027
00028 #ifndef NOFORM
00029 extern "C" {
00030 #include "form3.h"
00031 }
00032 #endif
00033
00034 #include <iostream>
00035 #include <iomanip>
00036 #include <sstream>
00037 #include <cstdio>
00038 #include <stdlib.h>
00039 #include <string.h>
00040 #include <time.h>
00041
00042 //=====
00043 // new default values of options
00044 // #define OLDDEFAULT
00045
00046 // new function for the output in python format
00047 // #define NEWOUTPY
00048
00049 //=====
00050 // For debugging
00051 //
00052 // #define MONITOR      // in graph elimination
00053 // #define CHECK        // check consistency
00054
00055 //=====
00056 // optimization : best combination depends on process by process
00057 #define SIMPSEL
00058
00059 // optimization : lower and upper bound of deg of target node of connection.
00060 #define MINMAXLEG
00061
00062 // optimization : optimization with respect to 'extonly' particles
00063 #define OPTEXTONLY
00064
00065 // check unique interaction by name or by code
00066 #define UNIQINTR
00067
00068 // possible extensions of the program
00069 // #define ORBITS
00070
00071 // reverse direction of an edge of agraph when anti-particle flows on it.
00072 // In this case the direction of edges will be different
00073 // from ones of original mgraph.
00074 // #define EDGEORDER
00075
00076 //-----
00077 #include "grcc.h"
00078
00079 #ifdef GRCC_NAMESPACE
```

```

00080 using namespace Grcc;
00081 #endif
00082
00083 #define MAXSTR 1024
00084
00085 //-----
00086 // Macro functions
00087 #define CLWIGHTD(x) (5*(x))
00088 #define CLWIGHTO(x) (3*(x)-2)
00089 #define MAXSTRLEN 81
00090
00091 #define MASK(n) ((1ul) < (n))
00092
00093 #define BOOLSTR(x) ((x) ? "True" : "False")
00094
00095 //-----
00096 // Static variables
00097
00098 static OptDef optDef0[] = {
00099 {"Step", "Generate particle assigned graphs", GRCC_AGraph, 0},
00100 {"Outgrf", "Output to file (out.grf)", False, 0},
00101 {"Outgrp", "Output to file (out.grp)", False, 0},
00102 {"OPI", "Only 1PI graphs", True, 0},
00103 {"NoSelfLoop", "Exclude graphs with loops consist of 1 edge", True, 0},
00104 {"NoTadpole", "Exclude graphs with tadpoles (2 edge connected)", True, 0},
00105 {"NoPtBlock", "Exclude graphs with tadpole blocks (2 node connected)", False, 0},
00106 {"No2Pt1LPI", "Exclude graphs with 2-point subgraphs", False, 0},
00107 {"NoExtSelf", "Exclude graphs with 2-pt subgraphs at ext. particles", False, 0},
00108 {"NoAdj2PtV", "Exclude graphs with an edge connecting 2-pt vertices", False, 0},
00109 {"Block", "Exclude graphs with more than one block", False, 0},
00110 {"NoMultiEdge", "Exclude graphs with multi-edges", False, 0},
00111 {"SymmInitial", "Symmetrize initial particles", False, 0},
00112 {"SymmFinal", "Symmetrize final particles", False, 0},
00113 };
00114 static OptDef optDef1[] = {
00115 {"Step", "Generate particle assigned graphs", GRCC_AGraph, 0},
00116 {"Outgrf", "Output to file (out.grf)", False, 0},
00117 {"Outgrp", "Output to file (out.grp)", False, 0},
00118 {"OPI", "Only 1PI graphs", False, 0},
00119 {"NoSelfLoop", "Exclude graphs with loops consist of 1 edge", False, 0},
00120 {"NoTadpole", "Exclude graphs with tadpoles (2 edge connected)", False, 0},
00121 {"NoPtBlock", "Exclude graphs with tadpole blocks (2 node connected)", False, 0},
00122 {"No2Pt1LPI", "Exclude graphs with 2-point subgraphs", False, 0},
00123 {"NoExtSelf", "Exclude graphs with 2-pt subgraphs at ext. particles", False, 0},
00124 {"NoAdj2PtV", "Exclude graphs with an edge connecting 2-pt vertices", False, 0},
00125 {"Block", "Exclude graphs with more than one block", False, 0},
00126 {"NoMultiEdge", "Exclude graphs with multi-edges", False, 0},
00127 {"SymmInitial", "Symmetrize initial particles", False, 0},
00128 {"SymmFinal", "Symmetrize final particles", False, 0},
00129 };
00130 #ifdef OLDDEFAULT
00131 static OptDef *optDef = &(optDef0[0]);
00132 static int nOptDef = sizeof(optDef0)/sizeof(OptDef);
00133 #else
00134 static OptDef *optDef = &(optDef1[0]);
00135 static int nOptDef = sizeof(optDef1)/sizeof(OptDef);
00136 #endif
00137
00138
00139 static OptQGDef optQGDef[] = {
00140 {"onepi", "onepr", "one-particle illreducible"},
00141 {"onshell", "offshell", "without self-energy part at external particles"},
00142 {"nosigma", "sigma", "no 2-point functions"},
00143 {"nosnail", "snail", "without snail"},
00144 {"notadpole", "tadpole", "without tadpole"},
00145 {"simple", "notsimple", "without self-loop nor multi-edge"},
00146 {"bipart", "nonbipart", "only bipartite graph"},
00147 {"cycli", "cyclr", "???"},
00148 {"floop", "", "without fermion loops of odd length"},
00149 #ifdef GRCC_QGRAF_OPT_TOPOL
00150 {"topol", "?", "topology"},
00151 #endif
00152 };
00153
00154 static int nOptQGDef = sizeof(optQGDef)/sizeof(OptQGDef);
00155
00156 static int prlevel = 2;
00157 static ErExit *erExit = NULL;
00158 static void *erExitArg = NULL;
00159
00160 //*****
00161 // Utility functions
00162 //=====
00163
00164 static void erEnd(const char *msg);
00165 static Bool nextPart(int nelem, int nclist, int *clist, int *nl, int *r);
00166 static void prlist(int n, const int *a, const char *msg);

```

```

00167 static int    *newArray(int size, int val);
00168 static int    *deleteArray(int *a);
00169 static int    **newMat(int n0, int n1, int val);
00170 static int    **deleteMat(int **m, int n0);
00171 static void    prIntArray(int n, int *p, const char *msg);
00172 static void    prIntArrayErr(int n, int *p, const char *msg);
00173 static int    *intdup(int n, int *v);
00174 static int    *delintdup(int *v);
00175 static void    bsort(int n, int *ord, int *a);
00176 static void    sorti(int n, int *a);
00177 static int    sortb(int n, int *a);
00178 static int    toSList(int n, int *a);
00179 static int    intSetAdd(int n, int *a, int v, const int size);
00180 static int    intSListAdd(int n, int *a, int v, const int size);
00181 static int    cmpArray(int na, int *a, int nb, int *b);
00182 static Bool    leqArray(int n, int *a, int *b);
00183 static void    prMomStr(int mom, const char *ms, int mn);
00184 static void    listDiff(int na, int *a, int nb, int *b, int *np, int *p, int *nq, int *q, int *nr, int
*r);
00185 static Bool    isSubSList(int na, int *a, int nb, int *b);
00186 static int    subtrSet(int na, int *a, int nb, int *b, int *c, int size);
00187 static int    nextPerm(int nelem, int nclass, int *cl, int *r, int *q, int *p, int count);
00188 static BigInt    ipow(int n, int p);
00189 static BigInt    factorial(int n);
00190
00191 // for debugging
00192 #ifdef CHECK
00193 static Bool    isIn(int n, int *a, int v);
00194 #endif
00195
00196 //=====
00197 // class Options
00198 //-----
00199 Options::Options(void)
00200 {
00201     if (nOptDef != GRCC_OPT_Size) {
00202         fprintf(GRCC_Stderr, "*** Options: inconsistent default values\n");
00203         fprintf(GRCC_Stderr, "nOptDef=%d, GRCC_OPT_Size=%d\n",
00204             nOptDef, GRCC_OPT_Size);
00205         exit(1);
00206     }
00207
00208     model = NULL;
00209     proc = NULL;
00210     sproc = NULL;
00211
00212     outmg = NULL;
00213     endmg = NULL;
00214     outag = NULL;
00215
00216     argmg = NULL;
00217     argemg = NULL;
00218     argag = NULL;
00219
00220     setDefaultValues();
00221
00222     // QGraf options
00223     if (nOptQGDef != GRCC_QGRAF_OPT_Size) {
00224         fprintf(GRCC_Stderr, "*** Options: inconsistent default values\n");
00225         fprintf(GRCC_Stderr, "nOptQGDef=%d, GRCC_QGRAF_OPT_Size=%d\n",
00226             nOptQGDef, GRCC_QGRAF_OPT_Size);
00227         exit(1);
00228     }
00229     nqgopt = 0;
00230     for (int j = 0; j < nOptQGDef; j++) {
00231         qgref[nqgopt].name = optQGDef[j].name;
00232         qgref[nqgopt].index = j;
00233         qgref[nqgopt].sign = +1;
00234         nqgopt++;
00235         if (strlen(optQGDef[j].cname) > 0) {
00236             qgref[nqgopt].name = optQGDef[j].cname;
00237             qgref[nqgopt].index = j;
00238             qgref[nqgopt].sign = -1;
00239             nqgopt++;
00240         }
00241     }
00242
00243     // default values
00244     for (int j = 0; j < GRCC_QGRAF_OPT_Size; j++) {
00245         qgopt[j] = 0;
00246     }
00247
00248     // for output
00249     out = new Output(this);
00250
00251     // subrpocess
00252     sproc = NULL;

```

```

00253
00254     // measuring time
00255     time0  = 0.0;
00256     time1  = 0.0;
00257 }
00258
00259 //-----
00260 Options::~Options(void)
00261 {
00262     outmg = NULL;
00263     outag = NULL;
00264
00265     argmg = NULL;
00266     argag = NULL;
00267
00268     delete out;
00269 }
00270
00271 //-----
00272 void Options::setDefaultValues(void)
00273 {
00274     int j;
00275
00276     // default values
00277     for (j = 0; j < GRCC_OPT_Size; j++) {
00278         values[j] = optDef[j].defaultv;
00279     }
00280
00281     values[GRCC_OPT_Step] = GRCC_AGraph;
00282
00283     // print level
00284     prlevel = 1;
00285 }
00286
00287 //-----
00288 void Options::setOldDefaultValues(void)
00289 {
00290     int j;
00291
00292     // default values
00293     for (j = 0; j < GRCC_OPT_Size; j++) {
00294         values[j] = optDef0[j].defaultv;
00295     }
00296
00297     values[GRCC_OPT_Step] = GRCC_AGraph;
00298
00299     // print level
00300     prlevel = 1;
00301 }
00302
00303 //-----
00304 void Options::setOutMG(OutEGB *omg, void *pt)
00305 {
00306     outmg = omg;
00307     argmg = pt;
00308 }
00309
00310 //-----
00311 void Options::setEndMG(OutEGB *emg, void *pt)
00312 {
00313     endmg = emg;
00314     argemg = pt;
00315 }
00316
00317 //-----
00318 void Options::setOutAG(OutEG *oag, void *pt)
00319 {
00320     outag = oag;
00321     argag = pt;
00322 }
00323
00324 //-----
00325 void Options::setErExit(ErExit *ere, void *erearg)
00326 {
00327     erExit = ere;
00328     erExitArg = erearg;
00329 }
00330
00331 //-----
00332 void Options::printLevel(int l)
00333 {
00334     prlevel = l;
00335 }
00336
00337 //-----
00338 void Options::setValue(int ind, int val)
00339 {

```

```

00340     if (0 <= ind && ind < GRCC_OPT_Size) {
00341         values[ind] = val;
00342     } else {
00343         if (prlevel > 0) {
00344             fprintf(GRCC_Stderr, "*** Options::setValue : invalid index=%d ",
00345                 ind);
00346             fprintf(GRCC_Stderr, "(val=%d)\n", val);
00347         }
00348         erEnd("Options::setValue : invalid index");
00349     }
00350 }
00351
00352 //-----
00353 int Options::getValue(int ind)
00354 {
00355     if (0 <= ind && ind < GRCC_OPT_Size) {
00356         return values[ind];
00357     } else {
00358         if (prlevel > 0) {
00359             fprintf(GRCC_Stderr, "*** Options::getValue : invalid index=%d\n", ind);
00360         }
00361         erEnd("Options::getValue : invalid index");
00362     }
00363     return -1;
00364 }
00365
00366 //-----
00367 void Options::setQgrafOpt(int *qg)
00368 {
00369     // reset options : default is to generate all connected graphs
00370
00371     #ifdef OLDDEFAULT
00372         values[GRCC_OPT_1PI] = False;
00373         values[GRCC_OPT_NoSelfLoop] = False;
00374         values[GRCC_OPT_NoTadpole] = False;
00375         values[GRCC_OPT_No1PtBlock] = False;
00376         values[GRCC_OPT_No2PtL1PI] = False;
00377         values[GRCC_OPT_NoExtSelf] = False;
00378         values[GRCC_OPT_NoAdj2PtV] = False;
00379         values[GRCC_OPT_Block] = False;
00380         values[GRCC_OPT_SymmInitial] = False;
00381         values[GRCC_OPT_SymmFinal] = False;
00382     #endif
00383
00384     for (int j = 0; j < GRCC_QGRAF_OPT_Size; j++) {
00385         qgopt[j] = qg[j];
00386     }
00387
00388     // {"onepi", "onepr"},
00389     if (qgopt[GRCC_QGRAF_OPT_ONEPI] > 0) {
00390         values[GRCC_OPT_1PI] = True;
00391     } else if (qgopt[GRCC_QGRAF_OPT_ONEPI] < 0) {
00392         values[GRCC_OPT_1PI] = False;
00393     }
00394
00395     // {"onshell", "offshell"}
00396     if (qgopt[GRCC_QGRAF_OPT_ONSHELL] > 0) {
00397         values[GRCC_OPT_NoExtSelf] = 1;
00398     } else if (qgopt[GRCC_QGRAF_OPT_ONSHELL] < 0) {
00399         values[GRCC_OPT_NoExtSelf] = 0;
00400     }
00401
00402     // {"nosigma", "sigma"}
00403
00404     // {"nosnail", "snail"},
00405     if (qgopt[GRCC_QGRAF_OPT_NOSNAIL] > 0) {
00406         values[GRCC_OPT_NoTadpole] = True;
00407         values[GRCC_OPT_No1PtBlock] = True;
00408     } else if (qgopt[GRCC_QGRAF_OPT_NOSNAIL] < 0) {
00409         values[GRCC_OPT_NoTadpole] = False;
00410         values[GRCC_OPT_No1PtBlock] = False;
00411     }
00412
00413     // {"notadpole", "tadpole"}
00414     if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] > 0) {
00415         values[GRCC_OPT_NoTadpole] = True;
00416     } else if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] < 0) {
00417         values[GRCC_OPT_NoTadpole] = False;
00418     }
00419
00420     // {"simple", "notsimple"},
00421     if (qgopt[GRCC_QGRAF_OPT_SIMPLE] > 0) {
00422         values[GRCC_OPT_NoSelfLoop] = True;
00423         values[GRCC_OPT_NoMultiEdge] = True;
00424     } else if (qgopt[GRCC_QGRAF_OPT_SIMPLE] < 0) {
00425         values[GRCC_OPT_NoSelfLoop] = False;
00426         values[GRCC_OPT_NoMultiEdge] = False;

```



```

00427     }
00428
00429     // {"bipart",      "nonbipart"},
00430     // {"cycli",      "cyclr"},
00431
00432 #ifdef GRCC_QGRAF_OPT_TOPOL
00433     // {"topol",      ""},
00434     if (qgopt[GRCC_QGRAF_OPT_TOPOL] > 0) {
00435         values[GRCC_OPT_SymmInitial] = True;
00436         values[GRCC_OPT_SymmFinal]   = True;
00437     }
00438 #endif
00439 }
00440
00441 //-----
00442 void Options::print(void)
00443 {
00444     int j;
00445
00446     printf("Options\n");
00447     printf("+++ GRCC_OPT_Size=%d, print level=%d: ",
00448           GRCC_OPT_Size, prlevel);
00449     printf("symbol = value (default)\n");
00450     for (j=0; j < GRCC_OPT_Size; j++) {
00451         printf("    %4d GRCC_OPT_%-15s = %2d (%2d)\n",
00452               j, optDef[j].name, values[j], optDef[j].defaultv);
00453     }
00454     printf("    outgrf=%s, outgrp=%s\n", out->outgrf, out->outgrp);
00455     printf("    GRCC_QGRAF_OPT_Size=%d:\n", GRCC_QGRAF_OPT_Size);
00456     for (j=0; j < GRCC_QGRAF_OPT_Size; j++) {
00457         printf("    %4d %-10s = %2d\n", j, optQGDef[j].name, qgopt[j]);
00458     }
00459 }
00460
00461 //-----
00462 const OptDef *Options::getDef(void)
00463 {
00464     return optDef;
00465 }
00466
00467 //-----
00468 const OptDef *Options::getOldDef(void)
00469 {
00470     return optDef0;
00471 }
00472
00473 //-----
00474 const OptQGDef *Options::getQGDef(void)
00475 {
00476     return optQGDef;
00477 }
00478
00479 //-----
00480 void Options::setOutputF(Bool outf, const char *fname)
00481 {
00482     values[GRCC_OPT_Outgrf] = outf;
00483     out->setOutgrf(fname);
00484 }
00485
00486 //-----
00487 void Options::setOutputP(Bool outp, const char *fname)
00488 {
00489     values[GRCC_OPT_Outgrp] = outp;
00490     out->setOutgrp(fname);
00491 }
00492
00493 //-----
00494 void Options::printModel(void)
00495 {
00496     if (prlevel > 0) {
00497         if (model != NULL) {
00498             model->prModel();
00499         } else {
00500             printf("*** model is not defined\n");
00501         }
00502     }
00503 }
00504
00505 //-----
00506 void Options::outModel(void)
00507 {
00508     if (out != NULL && model != NULL) {
00509         out->outModelF();
00510         out->outModelP();
00511     }
00512 }
00513

```

```

00514 //-----
00515 void Options::begin(Model *mdl)
00516 {
00517     model = mdl;
00518     if (out != NULL) {
00519         if (values[GRCC_OPT_Outgrf]) {
00520             out->outBeginF(model, values[GRCC_OPT_Outgrf]);
00521             if (model != NULL) {
00522                 out->outModelF();
00523             }
00524         }
00525         if (values[GRCC_OPT_Outgrp]) {
00526             out->outBeginP(model, values[GRCC_OPT_Outgrp]);
00527             if (model != NULL) {
00528                 out->outModelP();
00529             }
00530         }
00531     }
00532 }
00533
00534 //-----
00535 void Options::end(void)
00536 {
00537     if (prlevel > 1) {
00538         printf("Optimization: ");
00539 #ifdef SIMPSEL
00540         printf("SIMPSEL=1 ");
00541 #else
00542         printf("SIMPSEL=0 ");
00543 #endif
00544 #ifdef MINMAXLEG
00545         printf("MINMAXLEG=1 ");
00546 #else
00547         printf("MINMAXLEG=0 ");
00548 #endif
00549 #ifdef OPTEXTONLY
00550         printf("OPTEXTONLY=1 ");
00551 #else
00552         printf("OPTEXTONLY=0 ");
00553 #endif
00554         printf("\n");
00555     }
00556     if (out != NULL && values[GRCC_OPT_Outgrf]) {
00557         out->outEndF();
00558     }
00559     if (out != NULL && values[GRCC_OPT_Outgrp]) {
00560         out->outEndP();
00561     }
00562     model = NULL;
00563 }
00564 //
00565 //-----
00566 void Options::beginProc(Process *prc)
00567 {
00568     proc = prc;
00569     if (out != NULL && values[GRCC_OPT_Outgrf]) {
00570         out->outProcBeginF(prc);
00571     }
00572     if (out != NULL && values[GRCC_OPT_Outgrp]) {
00573         out->outProcBeginP(prc);
00574     }
00575     if (proc != NULL) {
00576         proc->mgrcount = 0;
00577         proc->agrcount = 0;
00578     }
00579 }
00580
00581 //-----
00582 void Options::endProc(void)
00583 {
00584     int k;
00585
00586     if (proc == NULL) {
00587         if (out != NULL && values[GRCC_OPT_Outgrf]) {
00588             out->outProcEndF();
00589         }
00590         if (out != NULL && values[GRCC_OPT_Outgrp]) {
00591             out->outProcEndP();
00592         }
00593         return;
00594     }
00595     if (prlevel > 0) {
00596         printf("\n");
00597         printf("+++ Proc %d: ext=%d, loop=%d, ",
00598             proc->id, proc->nExtern, proc->loop);
00599         if (model != NULL) {
00600

```

```

00601         printf("order=");
00602         prIntArray(model->ncouple, proc->clist, ": ");
00603         model->prParticleArray(proc->ninitl, proc->initlPart, "-->");
00604         model->prParticleArray(proc->nfinal, proc->finalPart, "");
00605     }
00606     printf(" (%8.2f sec)\n", proc->sec);
00607
00608
00609     printf("    Proc    %d: Total M-Graphs=%ld, M-Graphs=",
00610            proc->id, proc->nMGraphs);
00611     proc->wMGraphs.print(" (Conn)\n");
00612
00613     printf("    Proc    %d: Total M-Graphs=%ld, M-Graphs=",
00614            proc->id, proc->nMOPI);
00615     proc->wMOPI.print(" (lPI)\n");
00616
00617     printf("    Proc    %d: Total A-Graphs=%ld, A-Graphs=",
00618            proc->id, proc->nAGraphs);
00619     proc->wAGraphs.print(" (Conn)\n");
00620
00621     printf("    Proc    %d: Total A-Graphs=%ld, A-Graphs=",
00622            proc->id, proc->nAOPI);
00623     proc->wAOPI.print(" (lPI)\n");
00624
00625     printf("# { %d,{", proc->ninitl);
00626     for (k = 0; k < proc->ninitl; k++) {
00627         if (k != 0) {
00628             printf(", ");
00629         }
00630         if (proc->model != NULL) {
00631             printf("\"%s\"", proc->model->particleName(proc->initlPart[k]));
00632         } else {
00633             printf("%d", proc->initlPart[k]);
00634         }
00635     }
00636     printf(", %d,{", proc->nfinal);
00637     for (k = 0; k < proc->nfinal; k++) {
00638         if (k != 0) {
00639             printf(", ");
00640         }
00641         if (proc->model != NULL) {
00642             printf("\"%s\"", proc->model->particleName(proc->finalPart[k]));
00643         } else {
00644             printf("%d", proc->initlPart[k]);
00645         }
00646     }
00647     printf(", ");
00648     if (model != NULL) {
00649         printf("{");
00650         for (k = 0; k < model->ncouple; k++) {
00651             if (k != 0) {
00652                 printf(", ");
00653             }
00654             printf("%d", proc->clist[k]);
00655         }
00656         printf(",");
00657     }
00658     printf("},{%6ldL,%6ldL,%3ldL, -1.0, %4.2f},\n",
00659            proc->nAOPI, proc->wAOPI.num, proc->wAOPI.den, proc->sec);
00660 }
00661
00662 if (out != NULL && values[GRCC_OPT_Outgrf]) {
00663     out->outProcEndF();
00664 }
00665 if (out != NULL && values[GRCC_OPT_Outgrp]) {
00666     out->outProcEndP();
00667 }
00668 proc = NULL;
00669 }
00670
00671 //-----
00672 void Options::beginSubProc(SProcess *sprc)
00673 {
00674     sprc = sprc;
00675
00676     // 'beginProc' is called before
00677     if (out != NULL && values[GRCC_OPT_Outgrf]) {
00678         out->outSProcBeginF(sprc);
00679     }
00680     if (out != NULL && values[GRCC_OPT_Outgrp]) {
00681         out->outSProcBeginP(sprc);
00682     }
00683     if (proc != NULL) {
00684         return;
00685     }
00686     if (sprc != NULL) {
00687         sprc->mgrcount = 0;

```

```

00688     sproc->agrcount = 0;
00689 }
00690 }
00691
00692 //-----
00693 void Options::endSubProc(void)
00694 {
00695     MGraph *mgraph;
00696
00697     if (sproc == NULL) {
00698         if (out != NULL && values[GRCC_OPT_Outgrf]) {
00699             out->outProcEndF();
00700         }
00701         if (out != NULL && values[GRCC_OPT_Outgrp]) {
00702             out->outProcEndP();
00703         }
00704         return;
00705     }
00706     mgraph = sproc->mgraph;
00707     if (sproc != NULL) {
00708         sproc->resultMGraph(mgraph->cDiag, mgraph->wscon,
00709                             mgraph->c1PI, mgraph->wsopi);
00710     }
00711
00712     if (prlevel > 1) {
00713         printf("\n");
00714         printf("+++ Subproc %d: ext=%d, loop=%d, nodes=%d, edges=%d\n",
00715                sproc->id, sproc->nExtern, sproc->loop,
00716                sproc->nNodes, sproc->nEdges);
00717
00718         printf("    Subproc %d: Total M-Graphs=%ld, M-Wsum=",
00719                sproc->id, sproc->nMGraphs);
00720         sproc->wMGraphs.print(" (Conn)\n");
00721
00722         printf("    Subproc %d: Total M-Graphs=%ld, M-Wsum=",
00723                sproc->id, sproc->nMOPI);
00724         sproc->wMOPI.print(" (1PI)\n");
00725
00726         printf("    Subproc %d: Total A-Graphs=%ld, A-Wsum=",
00727                sproc->id, sproc->nAGraphs);
00728         sproc->wAGraphs.print(" (Conn)\n");
00729
00730         printf("    Subproc %d: Total A-Graphs=%ld, A-Wsum=",
00731                sproc->id, sproc->nAOPI);
00732         sproc->wAOPI.print(" (1PI)\n");
00733     }
00734     if (prlevel > 0) {
00735         printf("\n");
00736         printf("* Total %ld MGraphs; %ld 1PI", mgraph->cDiag, mgraph->c1PI);
00737         printf(" wscon = ");
00738         mgraph->wscon.print(" ( ");
00739         mgraph->wsopi.print(" 1PI)\n");
00740
00741 #ifdef MONITOR
00742         printf("* refine: %ld\n", mgraph->nCallRefine);
00743         printf("* discarded for refinement: %ld\n", mgraph->discardRefine);
00744         printf("* discarded for disconnected: %ld\n", mgraph->discardDisc);
00745         printf("* discarded for duplication: %ld\n", mgraph->discardIso);
00746 #endif
00747     }
00748
00749     if (proc != NULL) {
00750         return;
00751     }
00752     if (out != NULL && values[GRCC_OPT_Outgrf]) {
00753         out->outProcEndF();
00754     }
00755     if (out != NULL && values[GRCC_OPT_Outgrp]) {
00756         out->outProcEndP();
00757     }
00758 }
00759
00760 //-----
00761 void Options::newMGraph(MGraph *mgr)
00762 {
00763     MGraph *mgraph = mgr;
00764
00765     if (proc != NULL) {
00766         proc->mgrcount++;
00767         mgr->egraph->mId = proc->mgrcount;
00768     } else if (sproc != NULL) {
00769         sproc->mgrcount++;
00770         mgr->egraph->mId = sproc->mgrcount;
00771     }
00772
00773     if (out != NULL
00774         && values[GRCC_OPT_Step] == GRCC_MGraph) {

```

```

00775         if (values[GRCC_OPT_Outgrf]) {
00776             out->outEGraphF(mgraph->egraph);
00777         }
00778         if (values[GRCC_OPT_Outgrp]) {
00779             out->outEGraphP(mgraph->egraph);
00780         }
00781     }
00782     if (sproc != NULL) {
00783         sproc->endMGraph(mgr);
00784     }
00785     if (endmg != NULL) {
00786         (*endmg)(mgr->egraph, argemg);
00787     }
00788 }
00789
00790 //-----
00791 void Options::newAGraph(EGraph *egraph)
00792 {
00793     Fraction sf, zr;
00794
00795     if (proc != NULL) {
00796         proc->agrcount++;
00797         egraph->sId = proc->agrcount;
00798     } else if (sproc != NULL) {
00799         sproc->agrcount++;
00800         egraph->sId = sproc->agrcount;
00801     }
00802
00803     if (sproc != NULL) {
00804         zr = Fraction(0, 1);
00805         if ((egraph->nsym)*(egraph->esym) != 0) {
00806             sf = Fraction(egraph->extperm, egraph->nsym*egraph->esym);
00807         } else {
00808             sf = zr;
00809         }
00810         if (egraph->mgraph->opi) {
00811             sproc->resultAGraph(1, sf, 1, sf);
00812         } else {
00813             sproc->resultAGraph(1, sf, 0, zr);
00814         }
00815     }
00816
00817     if (out != NULL && values[GRCC_OPT_Outgrf]) {
00818         out->outEGraphF(egraph);
00819     }
00820     if (out != NULL && values[GRCC_OPT_Outgrp]) {
00821         out->outEGraphP(egraph);
00822     }
00823     if (outag != NULL) {
00824         (*outag)(egraph, argag);
00825     }
00826
00827     sproc->endAGraph(egraph);
00828 }
00829
00830 //=====
00831 Output::Output(Options *optn)
00832 {
00833     opt      = optn;
00834     model    = NULL;
00835     proc     = NULL;
00836     sproc    = NULL;
00837     outgrfp  = NULL;
00838     outgrpp  = NULL;
00839     procId   = -1;
00840     outgrf   = NULL;
00841     outgrp   = NULL;
00842     outproc  = False;
00843 }
00844 }
00845
00846 //-----
00847 Output::~Output(void)
00848 {
00849     if (outgrfp != NULL) {
00850         if (prlevel > 0) {
00851             fprintf(stderr, "*** file has not been closed : \"%s\\n\"",
00852                 outgrf);
00853         }
00854         fclose(outgrfp);
00855         outgrfp = NULL;
00856         erEnd("file has not been closed");
00857     }
00858     if (outgrf != NULL) {
00859         free(outgrf);
00860         outgrf = NULL;
00861     }

```

```

00862     if (outgrpp != NULL) {
00863         if (prlevel > 0) {
00864             fprintf(GRCC_Stderr, "*** file has not been closed : \"%s\\n\",
00865                 outgrpp);
00866         }
00867         fclose(outgrpp);
00868         outgrpp = NULL;
00869         erEnd("file has not been closed");
00870     }
00871     if (outgrp != NULL) {
00872         free(outgrp);
00873         outgrp = NULL;
00874     }
00875 }
00876
00877 //-----
00878 void Output::setOutgrf(const char *fname)
00879 {
00880     if (outgrf != NULL && strcmp(outgrf, fname) == 0) {
00881         return;
00882     }
00883
00884     if (outgrf != NULL) {
00885         // delete outgrf;
00886         free(outgrf);
00887     }
00888     if (fname == NULL || strlen(fname) < 1) {
00889         outgrf = NULL;
00890     } else {
00891         outgrf = strdup(fname);
00892     }
00893 }
00894
00895 //-----
00896 void Output::setOutgrp(const char *fname)
00897 {
00898     if (outgrp != NULL && strcmp(outgrp, fname) == 0) {
00899         return;
00900     }
00901
00902     if (outgrp != NULL) {
00903         free(outgrp);
00904     }
00905     if (fname == NULL || strlen(fname) < 1) {
00906         outgrp = NULL;
00907     } else {
00908         outgrp = strdup(fname);
00909     }
00910 }
00911
00912 //-----
00913 Bool Output::outBeginF(Model *mdl, Bool pr)
00914 {
00915     time_t tp;
00916     struct tm *tm;
00917     char sdate[MAXSTRLEN];
00918
00919     model = mdl;
00920
00921     if (outgrf == NULL || strlen(outgrf) < 1) {
00922         outgrfp = NULL;
00923         return True;
00924     } else if (outgrfp != NULL) {
00925         if (prlevel > 0) {
00926             fprintf(GRCC_Stderr, "*** outBegin: \"%s\" is already opened\\n\",
00927                 outgrf);
00928         }
00929         erEnd("outBegin: file is already opened\\n");
00930     }
00931
00932     if (!pr) {
00933         return True;
00934     }
00935     if ((outgrfp = fopen(outgrf, "w")) == NULL) {
00936         if (prlevel > 0) {
00937             fprintf(GRCC_Stderr, "*** outBegin: cannot open %s\\n\", outgrf);
00938         }
00939         return False;
00940     }
00941     tp = time(NULL);
00942     tm = localtime(&tp);
00943     strftime(sdate, MAXSTRLEN, "%Y/%m/%d %H:%M:%S", tm);
00944
00945     fprintf(outgrfp, "%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%\\n");
00946     fprintf(outgrfp, "% Generated by gcc at \"%s\\n\", sdate);
00947     fprintf(outgrfp, "Version={2,2,0,0};\\n");
00948     if (model != NULL) {

```

```

00949     fprintf(outgrfp, "Model=\"./%s.mdl\";\n", model->name);
00950 } else {
00951     fprintf(outgrfp, "Model=\"./Phi34.mdl\";\n");
00952 }
00953
00954
00955     return True;
00956 }
00957
00958 //-----
00959 Bool Output::outBeginP(Model *mdl, Bool pr)
00960 {
00961     time_t tp;
00962     struct tm *tm;
00963     char sdate[MAXSTRLEN];
00964
00965     model = mdl;
00966
00967     if (outgrp == NULL || strlen(outgrp) < 1) {
00968         outgrpp = NULL;
00969         return True;
00970     } else if (outgrpp != NULL) {
00971         if (prlevel > 0) {
00972             fprintf(GRCC_Stderr, "*** outBegin: \"%s\" is already opened\n",
00973                 outgrp);
00974         }
00975         erEnd("outBegin: file is already opened\n");
00976     }
00977
00978     if (!pr) {
00979         return True;
00980     }
00981     if ((outgrpp = fopen(outgrp, "w")) == NULL) {
00982         if (prlevel > 0) {
00983             fprintf(GRCC_Stderr, "*** outBegin: cannot open %s\n", outgrp);
00984         }
00985         return False;
00986     }
00987     tp = time(NULL);
00988     tm = localtime(&tp);
00989     strftime(sdate, MAXSTRLEN, "%Y/%m/%d %H:%M:%S", tm);
00990
00991     fprintf(outgrpp, "#####\n");
00992     fprintf(outgrpp, "# Generated by 'grcc' at \"%s\";\n", sdate);
00993
00994     return True;
00995 }
00996
00997 //-----
00998 void Output::outEndF(void)
00999 {
01000     if (outgrfp == NULL) {
01001         return;
01002     }
01003     fprintf(outgrfp, "#####\n");
01004     fprintf(outgrfp, "End=1;\n");
01005     fprintf(outgrfp, "#####\n");
01006     fclose(outgrfp);
01007     outgrfp = NULL;
01008
01009     free(outgrfp);
01010     outgrfp = NULL;
01011 }
01012
01013 //-----
01014 void Output::outEndP(void)
01015 {
01016     if (outgrpp == NULL) {
01017         return;
01018     }
01019     fprintf(outgrpp, "#####\n");
01020     fprintf(outgrpp, "# End\n");
01021     fprintf(outgrpp, "#####\n");
01022     fclose(outgrpp);
01023     outgrpp = NULL;
01024
01025     free(outgrpp);
01026     outgrpp = NULL;
01027 }
01028
01029 //-----
01030 void Output::outProcBeginF(Process *prc)
01031 {
01032     int k, ex;
01033
01034     if (prc == NULL) {
01035         return;

```

```

01036     }
01037
01038     proc    = prc;
01039     sproc   = NULL;
01040     procId  = proc->id;
01041
01042     if (outgrfp == NULL) {
01043         return;
01044     }
01045     if (outproc) {
01046         return;
01047     }
01048     outproc = True;
01049
01050     fprintf(outgrfp, "%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%\n");
01051     fprintf(outgrfp, "Process=%d;\n", proc->id);
01052     fprintf(outgrfp, "External=%d;\n", proc->ninitl+proc->nfinal);
01053     for (k = 0, ex = 0; k < proc->ninitl; k++, ex++) {
01054         fprintf(outgrfp, "%4d= initial %s;\n", ex,
01055             proc->model->particleName(proc->initlPart[k]));
01056     }
01057     for (k = 0; k < proc->nfinal; k++, ex++) {
01058         fprintf(outgrfp, "%4d= final %s;\n", ex,
01059             proc->model->particleName(proc->finalPart[k]));
01060     }
01061     fprintf(outgrfp, "Eend;\n");
01062     for (k = 0; k < proc->model->ncouple; k++) {
01063         fprintf(outgrfp, "%s=%d; ", proc->model->cnlist[k], proc->clist[k]);
01064     }
01065     fprintf(outgrfp, "Loop=%d;\n", proc->loop);
01066     fprintf(outgrfp, "OPI=%s;\n", (opt->values[GRCC_OPT_1PI] > 0 ? "Yes" : "No"));
01067     fprintf(outgrfp, "Assign=%s;\n", (opt->values[GRCC_OPT_Step]==GRCC_AGraph ? "Yes" : "No"));
01068     fprintf(outgrfp, "%% Options : dummy values\n");
01069     fprintf(outgrfp, "Expand=Yes; ExpMin=0; ExpMax=-1;\n");
01070     fprintf(outgrfp, "Block=No; Tadpole=Yes; Extself=Yes;\n");
01071     fprintf(outgrfp, "Selfe=Yes; Countert=No; AnyCT=No; Undefp=No;\n");
01072 }
01073
01074 //-----
01075 void Output::outProcBeginP(Process *prc)
01076 {
01077     if (prc == NULL) {
01078         return;
01079     }
01080
01081     proc    = prc;
01082     sproc   = NULL;
01083     procId  = proc->id;
01084
01085     if (outgrpp == NULL) {
01086         return;
01087     }
01088     if (outproc) {
01089         return;
01090     }
01091     outproc = True;
01092
01093     fprintf(outgrpp, "# Process=%d;\n", proc->id);
01094 }
01095
01096 //-----
01097 void Output::outProcBegin0(int next, int couple, int loop)
01098 {
01099     int k, ex;
01100
01101     procId = 0;
01102
01103     if (outgrfp == NULL) {
01104         return;
01105     }
01106     if (outproc) {
01107         return;
01108     }
01109     outproc = True;
01110
01111     fprintf(outgrfp, "%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%\n");
01112     fprintf(outgrfp, "Process=%d;\n", procId);
01113     fprintf(outgrfp, "External=%d;\n", next);
01114     int ninit = (next + 1) / 2;
01115     for (k = 0, ex = 0; k < ninit; k++, ex++) {
01116         fprintf(outgrfp, "%4d= initial undef;\n", ex);
01117     }
01118     for (k = 0; k < next - ninit; k++, ex++) {
01119         fprintf(outgrfp, "%4d= final undef;\n", ex);
01120     }
01121     fprintf(outgrfp, "Eend;\n");
01122     fprintf(outgrfp, "GRCC_PHI=%d; ", couple);

```



```

01123 // fprintf(outgrfp, "PHI=%d; ", couple);
01124 fprintf(outgrfp, "Loop=%d;\n", loop);
01125 fprintf(outgrfp, "OPI=%s;\n", (opt->values[GRCC_OPT_1PI] > 0? "Yes" : "No"));
01126 fprintf(outgrfp, "Assign=No;\n");
01127 fprintf(outgrfp, "% Options : dummy values\n");
01128 fprintf(outgrfp, "Expand=Yes; ExpMin=0; ExpMax=-1;\n");
01129 fprintf(outgrfp, "Block=No; Tadpole=Yes; Extself=Yes;\n");
01130 fprintf(outgrfp, "Selfe=Yes; Countert=No; AnyCT=No; Undefp=No;\n");
01131 }
01132
01133 //-----
01134 void Output::outSProcBeginF(SProcess *sprc)
01135 {
01136     int j, k, ex;
01137     PNodeClass *pnc;
01138
01139     if (sprc == NULL) {
01140         return;
01141     }
01142
01143     sprc = sprc;
01144     procId = sprc->id;
01145     pnc = sprc->pnclass;
01146
01147     if (outgrfp == NULL) {
01148         return;
01149     }
01150     if (outproc) {
01151         return;
01152     }
01153     outproc = True;
01154     fprintf(outgrfp, "%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%\n");
01155     fprintf(outgrfp, "Process=%d;\n", sprc->id);
01156     fprintf(outgrfp, "External=%d;\n", sprc->nExtern);
01157
01158     ex = 0;
01159     for (j = 0; j < pnc->nclass; j++) {
01160         if (pnc->type[j] == GRCC_AT_Initial) {
01161             for (k = 0; k < pnc->count[j]; k++) {
01162                 fprintf(outgrfp, "%4d= initial %s;\n", ex,
01163                     model->particleName(pnc->particle[j]));
01164                 ex++;
01165             }
01166         } else if (pnc->type[j] == GRCC_AT_Final) {
01167             for (k = 0; k < pnc->count[j]; k++) {
01168                 fprintf(outgrfp, "%4d= final %s;\n", ex,
01169                     model->particleName(-pnc->particle[j]));
01170                 ex++;
01171             }
01172         }
01173     }
01174
01175     fprintf(outgrfp, "End;\n");
01176     for (k = 0; k < sprc->model->ncouple; k++) {
01177         fprintf(outgrfp, "%s=%d; ", sprc->model->cnlist[k], sprc->clist[k]);
01178     }
01179     fprintf(outgrfp, "Loop=%d;\n", sprc->loop);
01180     fprintf(outgrfp, "OPI=%s;\n", (opt->values[GRCC_OPT_1PI] > 0? "Yes" : "No"));
01181     fprintf(outgrfp, "Assign=%s;\n", (opt->values[GRCC_OPT_Step]==GRCC_AGraph ? "Yes" : "No"));
01182     fprintf(outgrfp, "% Options : dummy values\n");
01183     fprintf(outgrfp, "Expand=Yes; ExpMin=0; ExpMax=-1;\n");
01184     fprintf(outgrfp, "Block=No; Tadpole=Yes; Extself=Yes;\n");
01185     fprintf(outgrfp, "Selfe=Yes; Countert=No; AnyCT=No; Undefp=No;\n");
01186 }
01187
01188 //-----
01189 void Output::outSProcBeginP(SProcess *sprc)
01190 {
01191     if (sprc == NULL) {
01192         return;
01193     }
01194
01195     sprc = sprc;
01196     procId = sprc->id;
01197
01198     if (outgrpp == NULL) {
01199         return;
01200     }
01201     if (outproc) {
01202         return;
01203     }
01204     outproc = True;
01205     fprintf(outgrpp, "# SProcess=%d;\n", sprc->id);
01206 }
01207
01208 //-----
01209 void Output::outProcEndF(void)

```

```

01210 {
01211     if (outgrfp == NULL) {
01212         return;
01213     }
01214     if (proc != NULL) {
01215         fprintf(outgrfp, "%s-----\n");
01216         fprintf(outgrfp, "Pend=%d;\n", proc->id);
01217     } else if (sproc != NULL) {
01218         fprintf(outgrfp, "%s-----\n");
01219         fprintf(outgrfp, "Pend=%d;\n", sproc->id);
01220     } else {
01221         fprintf(outgrfp, "%s-----\n");
01222         fprintf(outgrfp, "Pend=1;\n");
01223     }
01224     fflush(outgrfp);
01225 }
01226
01227 //-----
01228 void Output::outProcEndP(void)
01229 {
01230     if (outgrpp == NULL) {
01231         return;
01232     }
01233     fflush(outgrpp);
01234 }
01235
01236 //-----
01237 void Output::outEGraphF(EGraph *egraph)
01238 {
01239     int nd, lg, ptcl, ed, intr, j, k, loop;
01240     Model *mdl = egraph->model;
01241     Bool popt;
01242     EFLine *fl;
01243
01244     if (outgrfp == NULL) {
01245         return;
01246     }
01247     fprintf(outgrfp, "%s-----\n");
01248     if (egraph->assigned) {
01249         fprintf(outgrfp, "Graph=%ld;\n", egraph->sId);
01250         fprintf(outgrfp, "%s AGraph=%ld;\n", egraph->aId);
01251     } else {
01252         fprintf(outgrfp, "Graph=%ld;\n", egraph->mId);
01253     }
01254     fprintf(outgrfp, "Gtype=%ld;\n", egraph->mId);
01255     if (egraph->assigned) {
01256         fprintf(outgrfp, "Sfactor=%ld;\n",
01257             egraph->nsym * egraph->esym * egraph->fsign);
01258     } else {
01259         fprintf(outgrfp, "Sfactor=%ld;\n", egraph->nsym * egraph->esym);
01260     }
01261     fprintf(outgrfp, "%s ExtPerm=%ld; NSym=%ld; ESym=%ld; NSym1=%ld;"
01262         " Multp=%ld;\n",
01263         egraph->extperm, egraph->nsym, egraph->esym, egraph->nsym1,
01264         egraph->multp);
01265
01266     fprintf(outgrfp, "Vertex=%d;\n", egraph->nNodes - egraph->nExtern);
01267
01268     for (nd = 0; nd < egraph->nNodes; nd++) {
01269         fprintf(outgrfp, "%4d", nd);
01270         if (mdl != NULL && egraph->assigned && !egraph->isExternal(nd)) {
01271             intr = egraph->nodes[nd]->intrct;
01272             loop = mdl->interacts[intr]->loop;
01273             popt = False;
01274
01275             // not tree vertex
01276             if (loop > 0) {
01277                 fprintf(outgrfp, "[loop=%d", loop);
01278                 popt = True;
01279             }
01280
01281             // multiple coupling constants
01282             if (mdl->ncouple > 1) {
01283                 if (popt) {
01284                     fprintf(outgrfp, ";order={");
01285                 } else {
01286                     fprintf(outgrfp, "[order={");
01287                     popt = True;
01288                 }
01289                 for (j = 0; j < mdl->interacts[intr]->nclist; j++) {
01290                     if (j != 0) {
01291                         fprintf(outgrfp, ",");
01292                     }
01293                     fprintf(outgrfp, "%d", mdl->interacts[intr]->clist[j]);
01294                 }
01295                 fprintf(outgrfp, "}");
01296             }

```

```

01297         if (popt) {
01298             fprintf(outgrfp, "]);
01299         }
01300     } else if (!egraph->isExternal(nd)) {
01301         loop = egraph->nodes[nd]->extloop;
01302         // not tree vertex
01303         if (loop > 0) {
01304             fprintf(outgrfp, "[loop=%d]", loop);
01305         }
01306     }
01307     fprintf(outgrfp, "={");
01308
01309     // list of legs
01310     for (lg = 0; lg < egraph->nodes[nd]->deg; lg++) {
01311         if (lg != 0) {
01312             fprintf(outgrfp, ", ");
01313         }
01314         ed = V2Iedge(egraph->nodes[nd]->edges[lg]);
01315         // fprintf(outgrfp, "%4d", egraph->nodes[nd]->edges[lg]);
01316         fprintf(outgrfp, "%4d", abs(egraph->nodes[nd]->edges[lg]));
01317         ptcl = egraph->edges[ed]->ptcl;
01318         if (mdl != NULL && ptcl != 0 && egraph->assigned) {
01319             if (egraph->nodes[nd]->edges[lg] < 0) {
01320                 ptcl = mdl->normalParticle(-ptcl);
01321             } else {
01322                 ptcl = mdl->normalParticle(ptcl);
01323             }
01324             fprintf(outgrfp, "[%s]", mdl->particleName(ptcl));
01325         } else {
01326             fprintf(outgrfp, "[undef]");
01327         }
01328     }
01329     fprintf(outgrfp, "];\n");
01330 }
01331 // print Fermion line as comment line
01332 if (egraph->nFLines >= 0) {
01333     fprintf(outgrfp, "%s FLines=%d; FSign=%d; sId=%ld;\n",
01334             egraph->nFLines, egraph->fsign, egraph->sId);
01335 }
01336 for (j = 0; j < egraph->nFLines; j++) {
01337     fl = egraph->flines[j];
01338     fprintf(outgrfp, "%s %4d", j);
01339     if (fl->ftype == FL_Open) {
01340         fprintf(outgrfp, "[FOpen]=[");
01341     } else if (fl->ftype == FL_Closed) {
01342         fprintf(outgrfp, "[FLoop]=[");
01343     } else {
01344         fprintf(outgrfp, " ?%d", fl->ftype);
01345     }
01346     for (k = 0; k < fl->nlist; k++) {
01347         if (k != 0) {
01348             fprintf(outgrfp, ", ");
01349         }
01350         fprintf(outgrfp, "%d", fl->elist[k]);
01351     }
01352     fprintf(outgrfp, "];\n");
01353 }
01354 fprintf(outgrfp, "Vend;\n");
01355 fprintf(outgrfp, "Gend;\n");
01356 }
01357
01358 //-----
01359 #ifdef NEWOUTPY
01360 void Output::outEGraphP (EGraph *eg)
01361 {
01362     if (outgrpp == NULL) {
01363         return;
01364     }
01365     if (eg->assigned) {
01366         printf("outEGraphP:egraph:egraph[%ld]\n", eg->mId-1);
01367         eg->printPy(outgrpp, eg->mId);
01368         return;
01369     } else {
01370         printf("outEGraphP:mgraph:egraph[%ld]\n", eg->mId-1);
01371         eg->mgraph->printPy(outgrpp, eg->mId);
01372         return;
01373     }
01374 }
01375 }
01376 #else
01377 void Output::outEGraphP (EGraph *eg)
01378 {
01379     int      j, nd, lg, ed, k;
01380     ENode    *node;
01381     static char undef[] = "Undef";
01382     char      *s;
01383     EFLine    *fl;

```

```

01384
01385     if (outgrpp == NULL) {
01386         return;
01387     }
01388
01389     if (eg->assigned) {
01390         fprintf(outgrpp, "egraph[%ld] = {\n", eg->sId-1);
01391     } else {
01392         fprintf(outgrpp, "egraph[%ld] = {\n", eg->mId-1);
01393     }
01394
01395     // process
01396     if (proc != NULL) {
01397         fprintf(outgrpp, "    \"Process\": {\n");
01398         proc->outProcP(outgrpp);
01399         fprintf(outgrpp, "    },\n");
01400     }
01401
01402     // graph
01403     fprintf(outgrpp, "    \"GId\": [%ld, %ld, %ld],\n",
01404             eg->mId, eg->aId, eg->sId);
01405     fprintf(outgrpp, "    \"GParam\": {\nAssigned\": %d, \"
01406             \"NNodes\": %d, \"NEdges\": %d, \"NFLines\": %d},\n",
01407             eg->assigned, eg->nNodes, eg->nEdges, eg->nFlines);
01408     fprintf(outgrpp, "    \"Sym\": {\nFSign\": %d, \"NSym\": %ld, \"
01409             \"ESym\": %ld, \"NSym1\": %ld, \"Multp\": %ld},\n",
01410             eg->fsign, eg->nsym, eg->esym, eg->nsym1, eg->multp);
01411
01412     // nodes
01413     fprintf(outgrpp, "    \"Nodes\": [\n");
01414     for (nd = 0; nd < eg->nNodes; nd++) {
01415         node = eg->nodes[nd];
01416         if (model == NULL) {
01417             s = undef;
01418         } else if (!eg->assigned) {
01419             if (eg->isExternal(nd)) {
01420                 ed = Abs(eg->nodes[nd]->edges[0])-1;
01421                 s = model->particleName(eg->edges[ed]->ptcl);
01422             } else {
01423                 s = undef;
01424             }
01425         } else if (eg->isExternal(nd)) {
01426             s = model->particleName(node->intrct);
01427         } else {
01428             s = model->interacts[node->intrct]->name;
01429         }
01430         fprintf(outgrpp, "        [%d, \"%s\", %d, [",
01431                 nd, s, node->extloop);
01432         for (lg = 0; lg < eg->nodes[nd]->deg; lg++) {
01433             if (lg != 0) {
01434                 fprintf(outgrpp, ", ");
01435             }
01436             fprintf(outgrpp, "%d", eg->nodes[nd]->edges[lg]);
01437         }
01438         fprintf(outgrpp, "]],\n");
01439     }
01440     fprintf(outgrpp, "    ],\n");
01441
01442     // edges
01443     fprintf(outgrpp, "    \"Edges\": [\n");
01444     for (ed = 0; ed < eg->nEdges; ed++) {
01445         if (model != NULL) {
01446             s = model->particleName(eg->edges[ed]->ptcl);
01447             fprintf(outgrpp, "        [%d, \"%s\", [%d, %d],\n",
01448                     ed+1, s, eg->edges[ed]->nodes[0],
01449                     eg->edges[ed]->nodes[1]);
01450         } else {
01451             fprintf(outgrpp, "        [%d, \"Undef\", [%d, %d],\n",
01452                     ed+1, eg->edges[ed]->nodes[0],
01453                     eg->edges[ed]->nodes[1]);
01454         }
01455     }
01456
01457     fprintf(outgrpp, "    ],\n");
01458
01459     if (eg->nFlines >= 0) {
01460         // print Fermion line as comment line
01461         fprintf(outgrpp, "    \"FLines\": [\n");
01462         for (j = 0; j < eg->nFlines; j++) {
01463             fl = eg->flines[j];
01464             fprintf(outgrpp, "        [%d, ", j);
01465             if (fl->ftype == FL_Open) {
01466                 fprintf(outgrpp, "\"FOpen\", ");
01467             } else if (fl->ftype == FL_Closed) {
01468                 fprintf(outgrpp, "\"FLoop\", ");
01469             } else {
01470                 fprintf(outgrpp, "\"Undef%d\", ", fl->ftype);

```

```

01471         }
01472         fprintf(outgrpp, "[");
01473         for (k = 0; k < fl->nlist; k++) {
01474             if (k != 0) {
01475                 fprintf(outgrpp, ", ");
01476             }
01477             fprintf(outgrpp, "%d", fl->elist[k]);
01478         }
01479         fprintf(outgrpp, "],\n");
01480     }
01481     fprintf(outgrpp, " ]\n");
01482 }
01483
01484 // end of a graph
01485 fprintf(outgrpp, "];\n");
01486 }
01487 #endif
01488
01489 //-----
01490 void Output::outModelF(void)
01491 {
01492     char      *mdlfn;
01493     FILE      *mdlfp;
01494     Particle   *pt;
01495     Interaction *vt;
01496     int        j, k, l, ln;
01497     const char *ptn;
01498
01499     if (model == NULL) {
01500         if (prlevel > 0) {
01501             fprintf(GRCC_Stderr, "*** Output::outModel : model is not defined\n");
01502         }
01503         return;
01504     }
01505     ln = strlen(model->name)+5;
01506     mdlfn = new char[ln];
01507     snprintf(mdlfn, ln, "%s.mdl", model->name);
01508
01509     if ((mdlfp = fopen(mdlfn, "w")) == NULL) {
01510         if (prlevel > 0) {
01511             fprintf(GRCC_Stderr, "*** Output::outModel : cannot open \"%s\"\n",
01512                 mdlfn);
01513         }
01514         return;
01515     }
01516
01517     for (l = 0; l < 60; l++) { putc(' ', mdlfp); } putc('\n', mdlfp);
01518     fprintf(mdlfp, "%% File \"%s\"\n", mdlfn);
01519     fprintf(mdlfp, "%% Generated by graph generator\n");
01520     fprintf(mdlfp, " Version={2,2,0};\n");
01521
01522     // coupling constants
01523     fprintf(mdlfp, " Order={");
01524     for (j = 0; j < model->ncouple; j++) {
01525         if (j != 0) {
01526             fprintf(mdlfp, ", ");
01527         }
01528         fprintf(mdlfp, "%s", model->cnlist[j]);
01529     }
01530     fprintf(mdlfp, "};\n");
01531
01532     for (l = 0; l < 60; l++) { putc(' ', mdlfp); } putc('\n', mdlfp);
01533     fprintf(mdlfp, "%% particles\n");
01534     for (l = 0; l < 60; l++) { putc(' ', mdlfp); } putc('\n', mdlfp);
01535     for (j = 1; j < model->nParticles; j++) {
01536         pt = model->particles[j];
01537         fprintf(mdlfp, " Particle=%s; Antiparticle=%s;\n",
01538             pt->name, pt->aname);
01539         ptn = pt->typeGName();
01540         fprintf(mdlfp, " PType=%s; Charge=0; Color=1; Mass=0; Width=0;\n", ptn);
01541         fprintf(mdlfp, " PCode=%d; Massless; \n", pt->pcode);
01542         fprintf(mdlfp, " Pend;\n");
01543         fprintf(mdlfp, "%%\n");
01544     }
01545     for (l = 0; l < 60; l++) { putc(' ', mdlfp); } putc('\n', mdlfp);
01546     fprintf(mdlfp, "%% interactions\n");
01547     for (l = 0; l < 60; l++) { putc(' ', mdlfp); } putc('\n', mdlfp);
01548     for (j = 0; j < model->nInteracts; j++) {
01549         vt = model->interacts[j];
01550         fprintf(mdlfp, " Vertex={");
01551         for (k = 0; k < vt->nplist; k++) {
01552             if (k != 0) {
01553                 fprintf(mdlfp, ", ");
01554             }
01555             fprintf(mdlfp, "%s", model->particleName(vt->plist[k]));
01556         }
01557         fprintf(mdlfp, "}; ");
01558     }

```

```

01558         for (k = 0; k < model->ncouple; k++) {
01559             fprintf(mdlfp, "%s=%d; ", model->cnlist[k], vt->clist[k]);
01560         }
01561         fprintf(mdlfp, "FName=%s; Vend;\n", vt->name);
01562     }
01563     for (l = 0; l < 60; l++) { putc('\n', mdlfp); } putc('\n', mdlfp);
01564     fprintf(mdlfp, " Mend;\n");
01565     for (l = 0; l < 60; l++) { putc('\n', mdlfp); } putc('\n', mdlfp);
01566     fclose(mdlfp);
01567     delete[] mdlfn;
01568 }
01569
01570 //-----
01571 void Output::outModelP(void)
01572 {
01573     char          *mdlfn;
01574     FILE          *mdlfp;
01575     Particle      *pt;
01576     Interaction    *vt;
01577     int           j, k, l, ln;
01578     const char    *ptn;
01579
01580     if (model == NULL) {
01581         if (prlevel > 0) {
01582             fprintf(GRCC_Stderr, "*** Output::outModel : ");
01583             fprintf(GRCC_Stderr, "model is not defined\n");
01584         }
01585         return;
01586     }
01587     ln = strlen(model->name)+5;
01588     mdlfn = new char[ln];
01589     snprintf(mdlfn, ln, "%s.mdp", model->name);
01590
01591     if ((mdlfp = fopen(mdlfn, "w")) == NULL) {
01592         if (prlevel > 0) {
01593             fprintf(GRCC_Stderr, "*** Output::outModel : cannot open \"%s\"\n",
01594                 mdlfn);
01595         }
01596         return;
01597     }
01598
01599     for (l = 0; l < 60; l++) { putc('#', mdlfp); } putc('\n', mdlfp);
01600     fprintf(mdlfp, "# File \"%s\"\n", mdlfn);
01601     fprintf(mdlfp, "# Generated by graph generater grcc\n");
01602
01603     // coupling constants
01604     fprintf(mdlfp, "Model={\n");
01605     fprintf(mdlfp, "  \"Model\": {");
01606     fprintf(mdlfp, "\"%s\", %d, {",
01607         model->name, model->ncouple);
01608     for (j = 0; j < model->ncouple; j++) {
01609         if (j != 0) {
01610             fprintf(mdlfp, ", ");
01611         }
01612         fprintf(mdlfp, "\"%s\"", model->cnlist[j]);
01613     }
01614     fprintf(mdlfp, "], ");
01615     if (model->defpart == GRCC_DEFBYCODE) {
01616         fprintf(mdlfp, "\"ByCode\"");
01617     } else {
01618         fprintf(mdlfp, "\"ByName\"");
01619     }
01620     fprintf(mdlfp, "],\n");
01621
01622     fprintf(mdlfp, "  \"Particles\": {\n");
01623     for (j = 1; j < model->nParticles; j++) {
01624         pt = model->particles[j];
01625         ptn = pt->typeName();
01626         fprintf(mdlfp, "    [\"%s\", %d, \"%s\", %d, \"%s\", %d],\n",
01627             pt->name, pt->pcode, pt->aname, pt->acode,
01628             ptn, pt->extonly);
01629     }
01630     fprintf(mdlfp, "  ],\n");
01631     fprintf(mdlfp, "  \"Interactions\": {\n");
01632     for (j = 0; j < model->nInteracts; j++) {
01633         vt = model->interacts[j];
01634         fprintf(mdlfp, "    [\"%s\", %d, %d, {", vt->name, vt->id, vt->nplist);
01635         for (k = 0; k < vt->nplist; k++) {
01636             if (k != 0) {
01637                 fprintf(mdlfp, ", ");
01638             }
01639             if (model->defpart == GRCC_DEFBYCODE) {
01640                 fprintf(mdlfp, "%d", vt->plist[k]);
01641             } else {
01642                 fprintf(mdlfp, "\"%s\"", model->particleName(vt->plist[k]));
01643             }
01644         }

```

```

01645         fprintf(mdlfp, "], [");
01646         for (k = 0; k < model->ncouple; k++) {
01647             if (k != 0) {
01648                 fprintf(mdlfp, ",");
01649             }
01650             fprintf(mdlfp, "%d", vt->clist[k]);
01651         }
01652         fprintf(mdlfp, "]],\n");
01653     }
01654     fprintf(mdlfp, " ],\n");
01655     fprintf(mdlfp, "];\n");
01656     fclose(mdlfp);
01657     delete[] mdlfn;
01658 }
01659
01660 //*****
01661 // model.cc
01662
01663 //=====
01664
01665 static const char *ptypenames[] = GRCC_PT_Table;
01666 static const char *pgttypenames[] = GRCC_PT_GTable;
01667
01668 //=====
01669 // class Particle
01670 //-----
01671 Particle::Particle(Model *mdl, int pid, Pinput *pinp)
01672 {
01673     static char buff[100];
01674     static int nbuff=100;
01675     int j;
01676
01677     mdl      = mdl;                // the model
01678     id       = pid;                // id of this particle
01679     if (pinp->name == NULL || strlen(pinp->name) < 1) {
01680         if (pinp->pcode != 0) {
01681             snprintf(buff, nbuff, "p%d", pinp->pcode);
01682             name = strdup(buff);
01683         } else {
01684             snprintf(buff, nbuff, "pi%d", pid);
01685             name = strdup(buff);
01686         }
01687     } else {
01688         name = strdup(pinp->name);    // the name of the particle
01689     }
01690     if (pinp->aname == NULL) {
01691         if (pinp->acode != 0) {
01692             snprintf(buff, nbuff, "ap%d", Abs(pinp->acode));
01693             aname = strdup(buff);
01694         } else {
01695             snprintf(buff, nbuff, "ai%d", pid);
01696             aname = strdup(buff);
01697         }
01698     } else {
01699         aname = strdup(pinp->aname); // the name of the anti-particle
01700     }
01701     pcode = pinp->pcode;
01702     acode = pinp->acode;
01703     if (Abs(mdl->defpart) == GRCC_DEFBYCODE) {
01704         neutral = (pcode == acode);
01705     } else if (Abs(mdl->defpart) == GRCC_DEFBYNAME) {
01706         neutral = ((strcmp(name, aname)==0) ? True : False);
01707     }
01708
01709     // convert ptype string to its code.
01710     if (Abs(mdl->defpart) == GRCC_DEFBYCODE) {
01711         if (pinp->ptypc < GRCC_PT_Undef || pinp->ptypc > GRCC_PT_Size) {
01712             if (prlevel > 0) {
01713                 fprintf(stderr, "*** particle type is not defined: %d\n",
01714                     pinp->ptypc);
01715             }
01716             erEnd("particle type is not defined (illegal code)");
01717         }
01718         ptype = pinp->ptypc;
01719     } else if (Abs(mdl->defpart) == GRCC_DEFBYNAME) {
01720         if (pinp->ptypn == NULL) {
01721             erEnd("particle type is not defined (NULL)");
01722         }
01723         ptype = -1;
01724         for (j = 0; j < GRCC_PT_Size; j++) {
01725             if (strcmp(pinp->ptypn, ptypenames[j]) == 0) {
01726                 ptype = j;
01727                 break;
01728             }
01729         }
01730         if (ptype < 0) {
01731             if (prlevel > 0) {

```

```

01732             fprintf(GRCC_Stderr, "*** particle type \"%s\" is not defined\n",
01733                     pinp->ptypen);
01734         }
01735         erEnd("particle type is not defined (name)");
01736     }
01737 }
01738 if (ptype == GRCC_PT_Undef && ptype != 0) {
01739     erEnd("illegal ptype");
01740 }
01741
01742 extonly = pinp->extonly;
01743 cmindeg = 0;
01744 cmaxdeg = 0;
01745 }
01746
01747 //-----
01748 Particle::~Particle(void)
01749 {
01750     free(aname);
01751     free(name);
01752 }
01753
01754 //-----
01755 char *Particle::particleName(int p)
01756 {
01757     if (p < 0) {
01758         return aname;
01759     } else {
01760         return name;
01761     }
01762 }
01763
01764 //-----
01765 int Particle::particleCode(int p)
01766 {
01767     if (p < 0) {
01768         return acode;
01769     } else {
01770         return pcode;
01771     }
01772 }
01773
01774 //-----
01775 int Particle::isNeutral(void)
01776 {
01777     return neutral;
01778 }
01779
01780 //-----
01781 const char *Particle::typeName(void)
01782 {
01783     return ptypenames[ptype];
01784 }
01785
01786 //-----
01787 const char *Particle::typeGName(void)
01788 {
01789     return pgtypenames[ptype];
01790 }
01791
01792 //-----
01793 char *Particle::aparticle(void)
01794 {
01795     static char prtcl[] = "Particle";
01796
01797     if (isNeutral()) {
01798         return prtcl;
01799     } else {
01800         return aname;
01801     }
01802 }
01803
01804 //-----
01805 void Particle::prParticle(void)
01806 {
01807     if (isNeutral()) {
01808         printf("pid=%d, name=\"%s\", real_field, ", id, name);
01809     } else {
01810         printf("pid=%d, name=\"%s\", aname=\"%s\", ", id, name, aname);
01811     }
01812     printf("ptype=%s, pcode=%d, acode=%d, extonly=%d, cdeg=(%d,%d)\n",
01813           ptypenames[ptype], pcode, acode, extonly, cmindeg, cmaxdeg);
01814 }
01815
01816 //=====
01817 // class Interaction
01818 //-----

```



```

01819 Interaction::Interaction(Model *mdl, int iid, const char *nam, int icd, int *cpl, int nlgs, int
    *plst, int csm, int lp)
01820 {
01821     static char buff[100];
01822     static int nbuff=100;
01823     static Bool prmsg = True;
01824     Particle *p;
01825     int j, ndir, sdir, jdir, nmaaj, jmaj, ngho, sgho, jgho, ptcl;
01826     Bool ok;
01827
01828     mdl = mdl;           // the model
01829     id = iid;            // id of this interaction
01830     icode = icd;         // id of this interaction
01831     csum = csm;          // the total orders of coupling constants
01832     nlegs = nlgs;        // the size of plist[]
01833     loop = lp;           // the number of loops
01834
01835     if (nam == NULL || strlen(nam) < 1) {
01836         snprintf(buff, nbuff, "vt%d", icd);
01837         name = strdup(buff);
01838     } else {
01839         name = strdup(nam); // the name of the interaction
01840     }
01841     nclist = mdl->ncouple;
01842     clist = new int[nclist];
01843     icode = icd;
01844     for (j = 0; j < mdl->ncouple; j++) {
01845         clist[j] = cpl[j];
01846     }
01847     plist = new int[nlegs];
01848     nplist = nlegs;
01849     for (j = 0; j < nlegs; j++) {
01850         plist[j] = plst[j];
01851     }
01852     nslist = 0;
01853     slist = NULL;
01854
01855     // check fermion number conservation
01856     ndir = 0;
01857     sdir = 0;
01858     jdir = 0;
01859     nmaaj = 0;
01860     jmaj = 0;
01861     ngho = 0;
01862     sgho = 0;
01863     jgho = 0;
01864     ok = True;
01865     for (j = 0; j < nplist; j++) {
01866         if (plist[j] > 0) {
01867             p = mdl->particles[plist[j]];
01868             ptcl = 1;
01869         } else {
01870             p = mdl->particles[-plist[j]];
01871             ptcl = -1;
01872         }
01873
01874         if (p->ptype == GRCC_PT_Dirac) {
01875             ndir++;
01876             if (ptcl > 0) {
01877                 sdir++;
01878             } else {
01879                 sdir--;
01880             }
01881             if (Abs(sdir) == 1) {
01882                 jdir = j;
01883             } else if ((Abs(sdir) == 0 && j != jdir + 1) || Abs(sdir) > 1) {
01884                 fprintf(GRCC_Stderr, "*** Interaction: Dirac and anti-Dirac should be
01885                     "arranged in pairs in an interaction.\n");
01886                 ok = False;
01887             }
01888         } else if (p->ptype == GRCC_PT_Ghost) {
01889             ngho++;
01890             if (ptcl > 0) {
01891                 sgho++;
01892             } else {
01893                 sgho--;
01894             }
01895             if (Abs(sgho) == 1) {
01896                 jgho = j;
01897             } else if ((Abs(sgho) == 0 && j != jgho + 1) || Abs(sgho) > 1) {
01898                 fprintf(GRCC_Stderr, "*** Interaction: Ghost and anti-Ghost should be
01899                     "arranged in pairs in an interaction.\n");
01900                 ok = False;
01901             }
01902         } else if (p->ptype == GRCC_PT_Majorana) {
01903             nmaaj++;
01904             if (nmaaj % 2 == 1) {

```

```

01905         jmaj = j;
01906     } else if (j != jmaj + 1) {
01907         fprintf(GRCC_Stderr, "*** Interaction: two Majoranas should "
01908             "be arranged in pairs in an interaction.\n");
01909         ok = False;
01910     }
01911 }
01912 }
01913 if (sdir != 0) {
01914     fprintf(GRCC_Stderr, "*** Interaction: Dirac number is not conserved\n");
01915     ok = False;
01916 }
01917 if (sgho != 0) {
01918     fprintf(GRCC_Stderr, "*** Interaction: Ghost number is not conserved\n");
01919     ok = False;
01920 }
01921 if (nmaj % 2 != 0) {
01922     fprintf(GRCC_Stderr, "*** Interaction: odd number of Majorana particles\n");
01923     ok = False;
01924 }
01925 if (ndir + nmaj + ngho > 2 && prmsg) {
01926     fprintf(GRCC_Stderr, "+++ Interaction: more than 2 "
01927         "Dirac/Majorana/Ghost "
01928         "particles are interacting.\n");
01929     fprintf(GRCC_Stderr, "    Interaction has %d Dirac, %d Ghost "
01930         "and %d Majorana particles.\n",
01931         ndir, nmaj, ngho);
01932     fprintf(GRCC_Stderr, "    Sign factors related to fermions may "
01933         "be inconsistent with your calculation method.\n");
01934     prmsg = False;
01935 }
01936 if (!ok) {
01937     prInteraction();
01938     erEnd("illegal Dirac/Majorana/Ghost interaction");
01939 }
01940 }
01941
01942 //-----
01943 Interaction::~Interaction(void)
01944 {
01945     if (slist != NULL) {
01946         delete[] slist;
01947     }
01948     if (plist != NULL) {
01949         delete[] plist;
01950     }
01951     if (clist != NULL) {
01952         delete[] clist;
01953     }
01954     free(name);
01955 }
01956
01957 //-----
01958 void Interaction::prInteraction(void)
01959 {
01960     int j;
01961
01962     printf("vid=%d, icode=%d, name=\"%s\", loop=%d, csum=%d, cpl=",
01963         id, icode, name, loop, csum);
01964     prIntArray(mdl->ncouple, clist, " ", legs[""]);
01965     for (j = 0; j < nplist; j++) {
01966         if (j != 0) {
01967             printf(", ");
01968         }
01969         printf("%s", mdl->particleName(plist[j]));
01970     }
01971     printf("];\n");
01972 }
01973 }
01974
01975 //=====
01976 // class Model
01977 //-----
01978 Model::Model(MInput *minp)
01979 {
01980     static PInput pundef = {"undef", "undef", 0, 0, "undef", 0, 0};
01981     int j;
01982
01983     if (minp->name == NULL || strlen(minp->name) < 1) {
01984         erEnd("model should have a name");
01985     }
01986     name = strdup(minp->name);
01987     ncouple = minp->ncouple;
01988     if (ncouple >= GRCC_MAXNCPLG) {
01989         erEnd("too many coupling constants in the model (GRCC_MAXNCPLG)");
01990     }
01991     // cnlist = minp->cnamlist;

```

```

01992     cnlist = new char*[ncouple];
01993     for (j = 0; j < ncouple; j++) {
01994         cnlist[j] = strdup(minp->cnamlist[j]);
01995     }
01996
01997     nParticles = 0;
01998     particles = new Particle*[GRCC_MAXMPARTICLES];
01999     for (j = 0; j < GRCC_MAXMPARTICLES; j++) {
02000         particles[j] = NULL;
02001     }
02002     pdef = False;
02003
02004     nInteracts = 0;
02005     interacts = new Interaction*[GRCC_MAXMINTERACT];
02006     for (j = 0; j < GRCC_MAXMINTERACT; j++) {
02007         interacts[j] = NULL;
02008     }
02009     vdef = False;
02010
02011     if (particles == NULL || interacts == NULL) {
02012         erEnd("memory allocation failed");
02013     }
02014
02015 #ifdef UNIQINTR
02016     if (minp->defpart != GRCC_DEFBYNAME
02017         && minp->defpart != GRCC_DEFBYCODE) {
02018         erEnd("illegal value of defpart");
02019     }
02020 #else
02021     if (Abs(minp->defpart) != GRCC_DEFBYNAME
02022         && Abs(minp->defpart) != GRCC_DEFBYCODE) {
02023         erEnd("illegal value of defpart");
02024     }
02025 #endif
02026     defpart = minp->defpart;
02027
02028     maxnlegs = 0;
02029     maxcpl = 0;
02030     maxloop = 0;
02031     ncplgcp = 0;
02032     cplgvl = NULL;
02033
02034     addParticle(&pundef);
02035 }
02036
02037 //-----
02038 Model::~Model(void)
02039 {
02040     int j;
02041
02042     if (ncplgcp > 0) {
02043         for (j = ncplgcp-1; j >= 0; j--) {
02044             cplgvl[j] = delintdup(cplgvl[j]);
02045         }
02046         delete[] cplgvl;
02047         cplgnvl = delintdup(cplgnvl);
02048         cplglg = delintdup(cplglg);
02049         cplgcp = delintdup(cplgcp);
02050     }
02051
02052     for (j = GRCC_MAXMINTERACT-1; j >= 0; j--) {
02053         if (interacts[j] != NULL) {
02054             interacts[j]->slist = delintdup(interacts[j]->slist);
02055             delete interacts[j];
02056             interacts[j] = NULL;
02057         }
02058     }
02059     delete[] interacts;
02060     interacts = NULL;
02061
02062     for (j = GRCC_MAXMPARTICLES-1; j >= 0; j--) {
02063         if (particles[j] != NULL) {
02064             delete particles[j];
02065             particles[j] = NULL;
02066         }
02067     }
02068     delete[] particles;
02069     particles = NULL;
02070
02071     for (j=ncouple-1; j>=0; j--) {
02072         free(cnlist[j]);
02073     }
02074     delete[] cnlist;
02075     free(name);
02076 }
02077
02078 }

```

```

02079
02080 //-----
02081 void Model::prModel(void)
02082 {
02083     static char hdr[] = "#=====\\n";
02084     static char hdl[] = "#-----\\n";
02085     int j;
02086
02087     printf("%s", hdr);
02088     printf("Model=\\\"%s\\\", ", name);
02089     printf("coupling=[");
02090     for (j = 0; j < ncouple; j++) {
02091         if (j != 0) {
02092             printf(", ");
02093         }
02094         printf("\\\"%s\\\" ", cnlist[j]);
02095     }
02096     printf("];\\n");
02097     printf("%s", hdl);
02098     printf("Particles=%d;\\n", nParticles);
02099     for (j = 1; j < nParticles; j++) {
02100         particles[j]->prParticle();
02101     }
02102     printf("EndParticle;\\n");
02103     printf("allPart (%d) = [", nallPart);
02104     for (j = 0; j < nallPart; j++) {
02105         if (j != 0) {
02106             printf(", ");
02107         }
02108         printf("%d", allPart[j]);
02109     }
02110     printf("]\\n");
02111
02112     printf("%s", hdl);
02113     printf("Interactions=%d;\\n", nInteracts);
02114     for (j = 0; j < nInteracts; j++) {
02115         interacts[j]->prInteraction();
02116     }
02117     printf("EndInteraction;\\n");
02118     printf("%s", hdl);
02119     printf("InteractionTable;\\n");
02120     printf("# %d class in (total coupling, degree)\\n", ncplgcp);
02121     for (j = 0; j < ncplgcp; j++) {
02122         printf(" class=%d: cp=%d, lg=%d, vl=", j, cplgcp[j], cplglg[j]);
02123         prIntArray(cplgnvl[j], cplgv1[j], "\\n");
02124     }
02125     printf("EndInteractionTable;\\n");
02126     printf("%s", hdr);
02127 }
02128
02129 //-----
02130 void Model::addParticle(PInput *pinp)
02131 {
02132     int nid, aid, pid, pcd, acd;
02133
02134     if (nParticles >= GRCC_MAXMPARTICLES) {
02135         erEnd("particle table overflow (GRCC_MAXMPARTICLES)");
02136     }
02137
02138     // uniqueness check
02139     if (Abs(defpart) == GRCC_DEFBYCODE) {
02140         pcd = findParticleCode(pinp->pcode);
02141         acd = findParticleCode(pinp->acode);
02142         if (pcd > 0 || acd > 0) {
02143             if (prlevel > 0) {
02144                 fprintf(GRCC_Stderr, "*** particle code [%d, %d] ",
02145                     pinp->pcode, pinp->acode);
02146                 fprintf(GRCC_Stderr, "is already used.\\n");
02147             }
02148             erEnd("particle code is already defined");
02149         }
02150     } else if (Abs(defpart) == GRCC_DEFBYNAME) {
02151         if (pinp->name == NULL || pinp->aname == NULL ||
02152             strlen(pinp->name) < 1 || strlen(pinp->aname) < 1) {
02153             erEnd("no name of particle or anti-particle.");
02154         }
02155         nid = findParticleName(pinp->name);
02156         aid = findParticleName(pinp->aname);
02157         if (nid > 0 || aid > 0) {
02158             if (prlevel > 0) {
02159                 fprintf(GRCC_Stderr, "*** particle name [%s, %s] ",
02160                     pinp->name, pinp->aname);
02161                 fprintf(GRCC_Stderr, "is already used.\\n");
02162             }
02163             erEnd("particle name is already defined.");
02164         }
02165     }
}

```

```

02166
02167     pid = nParticles++;
02168     particles[pid] = new Particle(this, pid, pinp);
02169 }
02170
02171 //-----
02172 void Model::addParticleEnd(void)
02173 {
02174     int p, ap;
02175
02176     pdef = True;
02177
02178 #ifdef OPTEXTONLY
02179     nallPart = 0;
02180     for (p = nParticles-1; p >= 1; p--) {
02181         if (!particles[p]->extonly) {
02182             ap = antiParticle(p);
02183             if (ap != p) {
02184                 allPart[nallPart++] = ap;
02185             }
02186         }
02187     }
02188     for (p = 1; p < nParticles; p++) {
02189         if (!particles[p]->extonly) {
02190             allPart[nallPart++] = p;
02191         }
02192     }
02193     sorti(nallPart, allPart);
02194 #else
02195     nallPart = 0;
02196     for (p = nParticles-1; p >= 1; p--) {
02197         ap = antiParticle(p);
02198         if (ap != p) {
02199             allPart[nallPart++] = ap;
02200         }
02201     }
02202     for (p = 1; p < nParticles; p++) {
02203         allPart[nallPart++] = p;
02204     }
02205     sorti(nallPart, allPart);
02206 #endif
02207 }
02208
02209 //-----
02210 void Model::addInteraction(IInput *iinp)
02211 {
02212     int vid, nlegs, j, k, c;
02213     int csum, lp2, lp;
02214     int plist[GRCC_MAXLEGS];
02215
02216     if (!pdef) {
02217         erEnd("call 'addParticleEnd' before 'addInteraction'");
02218     }
02219     if (nInteracts >= GRCC_MAXMINTERACT) {
02220         erEnd("too many interactions in the model (GRCC_MAXMINTERACT)");
02221     }
02222     nlegs = iinp->nplistn;
02223     if (nlegs >= GRCC_MAXLEGS) {
02224         erEnd("too many legs in an interaction (GRCC_MAXLEGS)");
02225     }
02226
02227     // check identifier
02228     if (defpart == GRCC_DEFBYCODE) {
02229         if (iinp->icode < 0) {
02230             if (prlevel > 0) {
02231                 fprintf(GRCC_Stderr, "*** vertex code %d should be positive\n",
02232                     iinp->icode);
02233             }
02234             erEnd("vertex code should be positive");
02235         } else {
02236             vid = findInteractionCode(iinp->icode);
02237             if (vid >= 0) {
02238                 if (prlevel > 0) {
02239                     fprintf(GRCC_Stderr, "*** vertex code %d is already used\n",
02240                         iinp->icode);
02241                 }
02242                 erEnd("vertex code is already used");
02243             }
02244         }
02245     } else if (defpart == GRCC_DEFBYNAME) {
02246         if (iinp->name == NULL || strlen(iinp->name) < 1) {
02247             erEnd("no name of vertex\n");
02248         }
02249         vid = findInteractionName(iinp->name);
02250         if (vid >= 0) {
02251             if (prlevel > 0) {
02252                 fprintf(GRCC_Stderr, "*** vertex name %s is already used\n",

```

```

02253             iinp->name);
02254             erEnd("vertex name is already used");
02255         }
02256     }
02257 } else {
02258 #ifdef UNIQINTR
02259     // defpart =< 0
02260     erEnd("illegal value of defpart");
02261 #else
02262     // don't care about duplicated name/code of interaction
02263     ;
02264 #endif
02265 }
02266 vid = nInteracts++;
02267
02268 for (j = 0; j < nlegs; j++) {
02269     if (Abs(defpart) == GRCC_DEFBYCODE) {
02270         plist[j] = findParticleCode(iinp->plistc[j]);
02271         if (plist[j] == 0) {
02272             if (prlevel > 0) {
02273                 fprintf(GRCC_Stderr, "*** particle code %d ",
02274                     iinp->plistc[j]);
02275                 fprintf(GRCC_Stderr, "is not defined\n");
02276             }
02277             erEnd("particle is not defined (code)");
02278         }
02279     } else if (Abs(defpart) == GRCC_DEFBYNAME) {
02280         plist[j] = findParticleName(iinp->plistn[j]);
02281         if (plist[j] == 0) {
02282             if (prlevel > 0) {
02283                 fprintf(GRCC_Stderr, "*** particle name %s ",
02284                     iinp->plistn[j]);
02285                 fprintf(GRCC_Stderr, "is not defined\n");
02286             }
02287             erEnd("particle is not defined (name)");
02288         }
02289     }
02290 }
02291
02292 csum = 0;
02293 for (j = 0; j < ncouple; j++) {
02294     c = iinp->cvallist[j];
02295     if (c < 0) {
02296         if (prlevel > 0) {
02297             fprintf(GRCC_Stderr, "*** illegal value of c-constants \n");
02298             for (k = 0; k < ncouple; k++) {
02299                 fprintf(GRCC_Stderr, "      %s = %d\n",
02300                     cnlist[k], iinp->cvallist[k]);
02301             }
02302         }
02303         erEnd("illegal value of c-constants");
02304     }
02305     csum += c;
02306 }
02307 if (csum < 0) {
02308     if (prlevel > 0) {
02309         fprintf(GRCC_Stderr, "*** illegal total coupling-constants %d\n",
02310             csum);
02311         for (k = 0; k < ncouple; k++) {
02312             fprintf(GRCC_Stderr, "      %s = %d\n",
02313                 cnlist[k], iinp->cvallist[k]);
02314         }
02315     }
02316     erEnd("illegal value of c-constants");
02317 }
02318
02319 // assume : csum = nlegs - 2 + 2*loop
02320 lp2 = csum - nlegs + 2;
02321 if (lp2 % 2 != 0 || lp2 < 0) {
02322     if (prlevel > 0) {
02323         fprintf(GRCC_Stderr, "*** illegal coupling const : ");
02324         fprintf(GRCC_Stderr, "nlegs - 2 + 2*loop: 2*loop = %d\n", lp2);
02325     }
02326 }
02327 lp = lp2/2;
02328
02329 maxnlegs = Max(maxnlegs, nlegs);
02330 maxloop = Max(maxloop, lp);
02331 maxcpl = Max(maxcpl, csum);
02332
02333 interacts[vid] = new Interaction(this, vid, iinp->name, iinp->icode,
02334     iinp->cvallist, nlegs, plist, csum, lp);
02335 }
02336
02337 //-----
02338 void Model::addInteractionEnd(void)
02339 {

```

```

02340     int lst[GRCC_MAXMINTERACT];
02341     int tcp[GRCC_MAXMINTERACT], tlg[GRCC_MAXMINTERACT];
02342     int tnvl[GRCC_MAXMINTERACT], *tv1[GRCC_MAXMINTERACT];
02343     Interaction *vt;
02344     int cp, lg, j, k, p;
02345
02346     vdef = True;
02347     ncplgcp = 0;
02348     for (cp = 0; cp <= maxcpl; cp++) {
02349         for (lg = 0; lg <= maxnlegs; lg++) {
02350             k = 0;
02351             for (j = 0; j < nInteracts; j++) {
02352                 vt = interacts[j];
02353                 if (vt->csum == cp && vt->nlegs == lg) {
02354                     lst[k++] = j;
02355                 }
02356             }
02357             if (k > 0) {
02358                 tcp[ncplgcp] = cp;
02359                 tlg[ncplgcp] = lg;
02360                 tnvl[ncplgcp] = k;
02361                 tv1[ncplgcp] = intdup(k, lst);
02362                 ncplgcp++;
02363             }
02364         }
02365     }
02366     cplgcp = intdup(ncplgcp, tcp);
02367     cplglg = intdup(ncplgcp, tlg);
02368     cplgnvl = intdup(ncplgcp, tnvl);
02369     cplgvl = new int*[ncplgcp];
02370     for (j = 0; j < ncplgcp; j++) {
02371         if (cplgnvl[j] > 0) {
02372             cplgvl[j] = tv1[j];
02373         } else {
02374             cplgvl[j] = NULL;
02375         }
02376     }
02377 }
02378
02379 for (j = 0; j < nInteracts; j++) {
02380     vt = interacts[j];
02381     if (vt->slist != NULL) {
02382         erEnd("addInteractionEnd: vt->nslist != NULL");
02383     }
02384     vt->slist = intdup(vt->nplist, vt->plist);
02385     vt->nslist = toSList(vt->nplist, vt->slist);
02386 }
02387
02388 for (p = 0; p < nParticles; p++) {
02389     particles[p]->cmindeg = 0;
02390     particles[p]->cmaxdeg = 0;
02391 }
02392 for (j = 0; j < nInteracts; j++) {
02393     vt = interacts[j];
02394     for (k = 0; k < vt->nplist; k++) {
02395         p = abs(vt->plist[k]);
02396         if (particles[p]->cmindeg == 0) {
02397             particles[p]->cmindeg = vt->nlegs;
02398             particles[p]->cmaxdeg = vt->nlegs;
02399         } else {
02400             particles[p]->cmindeg = Min(particles[p]->cmindeg, vt->nlegs);
02401             particles[p]->cmaxdeg = Max(particles[p]->cmaxdeg, vt->nlegs);
02402         }
02403     }
02404 }
02405 }
02406
02407 //-----
02408 int Model::findParticleName(const char *name)
02409 {
02410     int j;
02411
02412     for (j = 0; j < nParticles; j++) {
02413         if (strcmp(name, particles[j]->name) == 0) {
02414             return j;
02415         }
02416     }
02417     for (j = 0; j < nParticles; j++) {
02418         if (strcmp(name, particles[j]->aname) == 0) {
02419             return -j;
02420         }
02421     }
02422     return 0;
02423 }
02424
02425 //-----
02426 int Model::findParticleCode(int pcd)

```

```

02427 {
02428     int j;
02429
02430     for (j = 0; j < nParticles; j++) {
02431         if (pcd == particles[j]->pcode) {
02432             return j;
02433         } else if (pcd == particles[j]->acode) {
02434             return -j;
02435         }
02436     }
02437     return 0;
02438 }
02439
02440 //-----
02441 char *Model::particleName(int p)
02442 {
02443     int q;
02444
02445     if (Abs(p) >= nParticles) {
02446         if (prlevel > 0) {
02447             fprintf(GRCC_Stderr, "\n*** Model::particleName: ");
02448             fprintf(GRCC_Stderr, "illegal particle id=%d\n", p);
02449         }
02450         erEnd("Model::particleName: illegal particle");
02451     }
02452     if (p < 0) {
02453         q = - p;
02454     } else {
02455         q = p;
02456     }
02457     return particles[q]->particleName(p);
02458 }
02459
02460 //-----
02461 int Model::particleCode(int p)
02462 {
02463     int q;
02464
02465     if (Abs(p) >= nParticles) {
02466         fprintf(GRCC_Stderr, "\n*** Model::particleCode: illegal particle id=%d\n",
02467             p);
02468         erEnd("Model::particleCode: illegal particle");
02469     }
02470     if (p < 0) {
02471         q = - p;
02472     } else {
02473         q = p;
02474     }
02475     return particles[q]->particleCode(p);
02476 }
02477
02478 //-----
02479 void Model::prParticleArray(int n, int *a, const char *msg)
02480 {
02481     int j;
02482
02483     printf("[");
02484     for (j = 0; j < n; j++) {
02485         if (j != 0) {
02486             printf(", ");
02487         }
02488         printf("%s", particleName(a[j]));
02489     }
02490     printf("]%s", msg);
02491 }
02492
02493 //-----
02494 int Model::findMCClass(const int cpl, const int dgr)
02495 {
02496     int j;
02497
02498     for (j = 0; j < ncplgcp; j++) {
02499         if (cplgcp[j] == cpl && cplglg[j] == dgr) {
02500             return j;
02501         }
02502     }
02503     return -1;
02504 }
02505
02506 //-----
02507 int Model::normalParticle(int pt)
02508 {
02509     int ptc = Abs(pt);
02510     Particle *p;
02511
02512     if (ptc >= nParticles) {
02513         return 0;

```



```

02514     }
02515     p = particles[ptc];
02516     if (p->isNeutral()) {
02517         return ptc;
02518     } else {
02519         return pt;
02520     }
02521 }
02522
02523 //-----
02524 int Model::antiParticle(int pt)
02525 {
02526     int ptc = Abs(pt);
02527     Particle *p;
02528
02529     p = particles[ptc];
02530     if (p->isNeutral()) {
02531         return ptc;
02532     } else {
02533         return -pt;
02534     }
02535 }
02536
02537 //-----
02538 int *Model::allParticles(int *len)
02539 {
02540     *len = nallPart;
02541     return allPart;
02542 }
02543
02544 //-----
02545 int Model::findInteractionName(const char *name)
02546 {
02547     int j;
02548
02549     for (j = 0; j < nInteracts; j++) {
02550         if (strcmp(name, interacts[j]->name) == 0) {
02551             return j;
02552         }
02553     }
02554     return -1;
02555 }
02556
02557 //-----
02558 int Model::findInteractionCode(int icd)
02559 {
02560     int j;
02561
02562     for (j = 0; j < nInteracts; j++) {
02563         if (icd == interacts[j]->icode) {
02564             return j;
02565         }
02566     }
02567     return -1;
02568 }
02569
02570 //-----
02571 void Model::printMInput(MInput *min)
02572 {
02573     printf("  \"Model\": [\"%s\", %d, [",
02574           min->name, min->ncouple);
02575     for (int j = 0; j < min->ncouple; j++) {
02576         if (j != 0) {
02577             printf(", ");
02578         }
02579         printf("\"%s\"", min->cnamlist[j]);
02580     }
02581     printf("], ");
02582     if (min->defpart == GRCC_DEFBYCODE) {
02583         printf("\"ByCode\"");
02584     } else {
02585         printf("\"ByName\"");
02586     }
02587     printf("],\n");
02588 }
02589
02590 //-----
02591 void Model::printPInput(PInput *pin)
02592 {
02593     printf("    [\"%s\"(%d), \"%s\"(%d), \"%s\"(%d), %d],\n",
02594           pin->name, pin->pcode, pin->aname, pin->acode,
02595           pin->ptypen, pin->ptypec, pin->extonly);
02596 }
02597
02598 //-----
02599 void Model::printIInput(IInput *iin)
02600 {

```

```

02601     int j;
02602
02603     printf("    [\"%s\"(%d), %d, [\", iin->name, iin->icode, iin->nplistn);
02604     for (j = 0; j < iin->nplistn; j++) {
02605         if (j != 0) {
02606             printf(", ");
02607         }
02608         printf(\"%s\"(%d)\", iin->plistn[j], iin->plistc[j]);
02609     }
02610     printf(], [");
02611     for (j = 0; j < GRCC_MAXNCPLG; j++) {
02612         if (j != 0) {
02613             printf(", ");
02614         }
02615         printf("%d", iin->cvallist[j]);
02616     }
02617     printf(], \n");
02618 }
02619
02620 //*****
02621 // proc.cc
02622
02623 //=====
02624 // class PNodeClass
02625 //-----
02626 PNodeClass::PNodeClass(SProcess *spc, int nnods, int nclss, NCInput *cls)
02627 {
02628     // Create a class of nodes
02629     // nnodes : # nodes
02630     // nclss : # classes
02631     // cls : table of class inputs
02632     //
02633     int j, k, nn, lp2;
02634     Bool ok = True;
02635
02636     sproc = spc;
02637     nnodes = nnods;
02638     nclass = nclss;
02639     deg = new int[nclass];
02640     type = new int[nclass];
02641     particle = new int[nclass];
02642     count = new int[nclass];
02643     couple = new int[nclass];
02644     cmindeg = new int[nclass];
02645     cmaxdeg = new int[nclass];
02646     for (j = 0; j < nclass; j++) {
02647         deg[j] = cls[j].cldeg;
02648         count[j] = cls[j].clnum;
02649         type[j] = cls[j].cltyp;
02650         cmindeg[j] = cls[j].cmindeg;
02651         cmaxdeg[j] = cls[j].cmaxdeg;
02652         particle[j] = cls[j].ptcl;
02653         couple[j] = cls[j].cple;
02654         lp2 = (couple[j]-deg[j]+2);
02655         if (!isATEXternal(type[j]) && (lp2 % 2 != 0 || lp2 < 0)) {
02656             if (prlevel > 0) {
02657                 fprintf(GRCC_Stderr, "*** PNodeClass: illegal loop: "
02658                     ": 2*loop=cpl[%d](%d)-deg[%d](%d)+2 = 2*loop = %d\n",
02659                     j, couple[j], j, deg[j], lp2);
02660                 for (k = 0; k < nclss; k++) {
02661                     fprintf(GRCC_Stderr, "k=%d, deg=%d, typ=%d, ptcl=%d, ",
02662                         k, deg[k], type[k], particle[k]);
02663                     fprintf(GRCC_Stderr, "cpl=%d, cnt=%d\n",
02664                         couple[k], count[k]);
02665                 }
02666             }
02667             ok = False;
02668         }
02669     }
02670     if (!ok) {
02671         erEnd("PNodeClass: illegal loop");
02672     }
02673     cl2nd = new int[nclass+1];
02674     nd2cl = new int[nnodes];
02675     cl2mcl = new int[nnodes];
02676
02677     nn = 0;
02678     for (j = 0; j < nclass; j++) {
02679         cl2nd[j] = nn;
02680         for (k = 0; k < count[j]; k++, nn++) {
02681             nd2cl[nn] = j;
02682         }
02683         if (isATEXternal(type[j])) {
02684             cl2mcl[j] = -1;
02685         } else {
02686             cl2mcl[j] = spc->model->findMClass(couple[j], deg[j]);
02687             if (cl2mcl[j] < 0) {

```

```

02688         if (prlevel > 0) {
02689             fprintf(GRCC_Stderr, "*** PNodeClass : no vertex : ");
02690             fprintf(GRCC_Stderr, "coupling=%d, degree=%d\n",
02691                 couple[j], deg[j]);
02692         }
02693         erEnd("PNodeClass : no vertex");
02694     }
02695 }
02696 }
02697 cl2nd[nclass] = nnodes;
02698 }
02699 //-----
02700 PNodeClass::PNodeClass(SProcess *spc, int nnods, int nclass, int *dgs, int *typ, int *ptcl, int *cpl,
02701     int *cnt, int *cmind, int *cmaxd)
02702 {
02703     // Create a class of nodes
02704     // nnodes : # nodes
02705     // nclass : # classes
02706     // dgs : degree of a node, which is common to the vertices in a class
02707     // typ : initial/final/vertex
02708     // ptcl : particle code or list of possible interactions
02709     // cpl : values of coupling constants.
02710     // cnt : the number of nodes in this class
02711     //
02712     int j, k, nn, lp2;
02713     Bool ok = True;
02714     sproc = spc;
02715     nnodes = nnods;
02716     nclass = nclass;
02717     deg = new int[nclass];
02718     type = new int[nclass];
02719     particle = new int[nclass];
02720     count = new int[nclass];
02721     couple = new int[nclass];
02722     cmindeg = new int[nclass];
02723     cmaxdeg = new int[nclass];
02724     for (j = 0; j < nclass; j++) {
02725         deg[j] = dgs[j];
02726         type[j] = typ[j];
02727         particle[j] = ptcl[j];
02728         count[j] = cnt[j];
02729         couple[j] = cpl[j];
02730         cmindeg[j] = cmind[j];
02731         cmaxdeg[j] = cmaxd[j];
02732         lp2 = (cpl[j]-dgs[j]+2);
02733         if (!isATEXternal(type[j]) && (lp2 % 2 != 0 || lp2 < 0)) {
02734             if (prlevel > 0) {
02735                 fprintf(GRCC_Stderr, "*** PNodeClass: illegal loop: "
02736                     ": 2*loop=cpl[%d](%d)-deg[%d](%d)+2 = 2*loop = %d\n",
02737                     j, cpl[j], j, dgs[j], lp2);
02738                 for (k = 0; k < nclass; k++) {
02739                     fprintf(GRCC_Stderr, "k=%d, dgs=%d, typ=%d, ptcl=%d, ",
02740                         k, dgs[k], typ[k], ptcl[k]);
02741                     fprintf(GRCC_Stderr, "cpl=%d, cnt=%d\n", cpl[k], cnt[k]);
02742                 }
02743             }
02744             ok = False;
02745         }
02746     }
02747     if (!ok) {
02748         erEnd("PNodeClass: illegal loop");
02749     }
02750     cl2nd = new int[nclass+1];
02751     nd2cl = new int[nnodes];
02752     cl2mcl = new int[nnodes];
02753
02754     nn = 0;
02755     for (j = 0; j < nclass; j++) {
02756         cl2nd[j] = nn;
02757         for (k = 0; k < count[j]; k++, nn++) {
02758             nd2cl[nn] = j;
02759         }
02760         if (isATEXternal(type[j])) {
02761             cl2mcl[j] = -1;
02762         } else {
02763             cl2mcl[j] = spc->model->findMClass(couple[j], deg[j]);
02764             if (cl2mcl[j] < 0) {
02765                 if (prlevel > 0) {
02766                     fprintf(GRCC_Stderr, "*** PNodeClass : no vertex : ");
02767                     fprintf(GRCC_Stderr, "coupling=%d, degree=%d\n",
02768                         couple[j], deg[j]);
02769                 }
02770                 erEnd("PNodeClass : no vertex");
02771             }
02772         }
02773     }
}

```

```

02774     cl2nd[nclass] = nnodes;
02775 }
02776
02777 //-----
02778 PNodeClass::~PNodeClass(void)
02779 {
02780     delete[] cl2mcl;
02781     delete[] nd2cl;
02782     delete[] cl2nd;
02783     delete[] cmaxdeg;
02784     delete[] cmindeg;
02785     delete[] couple;
02786     delete[] count;
02787     delete[] particle;
02788     delete[] type;
02789     delete[] deg;
02790 }
02791
02792 //-----
02793 void PNodeClass::prPNodeClass(void)
02794 {
02795     int j;
02796
02797     printf("+++ PNodeClass: nclass=%d, nnodes=%d\n", nclass, nnodes);
02798     for (j = 0; j < nclass; j++) {
02799         prElem(j);
02800     }
02801     printf("\n");
02802 }
02803
02804 //-----
02805 void PNodeClass::prElem(int j)
02806 {
02807     int tp;
02808
02809     printf("%3d: %-7s(%2d), ", j, GRCC_AT_NdStr(type[j]), type[j]);
02810     printf("deg=%d, count=%d, nodes[%d--%d], couple=%d, cmindeg=%d, cmaxdeg=%d",
02811           deg[j], count[j], cl2nd[j], cl2nd[j+1], couple[j], cmindeg[j], cmaxdeg[j]);
02812     tp = type[j];
02813     if (isATEXternal(tp)) {
02814         if (sproc->model != NULL) {
02815             printf(", ptcl=%s ", sproc->model->particleName(particle[j]));
02816         } else {
02817             printf(", ptcl=%d ", particle[j]);
02818         }
02819     }
02820     printf("\n");
02821 }
02822 }
02823
02824 //=====
02825 // class SProcess
02826 //-----
02827 SProcess::SProcess(Model *mdl, Process *prc, Options *opts, int sid, int *clst, int ncls, int *cdeg,
02828 int *ctyp, int *ptcl, int *cpl, int *cnum, int *cmin, int *cmaxd)
02829 {
02830     // Construct a Subprocess object
02831     // mdl          : model
02832     // prc          : process (may be NULL)
02833     // opts         : options
02834     // sid          : id of the sprocess
02835     // ncls         : the number of classes
02836     // cdeg[ncls]   : the table of degrees of nodes.
02837     // ctyp[ncls]   : the table of nodes in the classes
02838     // ptcl[ncls]   : particle(External)/interaction code(Internal)
02839     // cpl[ncls]    : the table of total order of coupling constants.
02840     // cnum[ncls]   : the table of nodes in the classes
02841     // cmin[ncls]   : the table of min(deg of connectable vertex)
02842     // cmaxd[ncls]  : the table of max(deg of connectable vertex)
02843
02844     int j, cp, lp2, ndeg, nvrt, tcpl0;
02845     bool ok;
02846
02847     if (ncls < 1) {
02848         fprintf(GRCC_Stderr, "*** SProcess::SProcess: no class %d\n", ncls);
02849         erEnd("SProcess::SProcess: no Class");
02850     }
02851     id      = sid;
02852     model   = mdl;
02853     proc    = prc;
02854     opt     = opts;
02855     nclass  = ncls;
02856
02857     nNodes  = 0;
02858     nEdges  = 0;
02859     nExtern  = 0;
02860     tCouple  = 0;

```

```

02860     loop      = 0;
02861     mgraph    = NULL;
02862     egraph    = NULL;
02863     astack    = NULL;
02864
02865     mgrcount  = 0;
02866     agrcount  = 0;
02867     extperm   = 1;
02868
02869     // the results of the graph generation
02870     nMGraphs  = 0;           // the number of generated M-graphs
02871     nMOPI     = 0;           // the number of 1PI M-graphs
02872     wMGraphs.setValue(0,1); // the weighted sum of M-graphs
02873     wMOPI.setValue(0,1);    // the weighted sum of 1PI M-graphs
02874
02875     nAGraphs  = 0;           // the number of generated A-graphs
02876     nAOPI     = 0;           // the number of 1PI A-graphs
02877     wAGraphs.setValue(0,1); // the weighted sum of A-graphs
02878     wAOPI.setValue(0,1);    // the weighted sum of 1PI A-graphs
02879
02880     // check input
02881     nNodes    = 0;
02882     nExtern    = 0;
02883
02884     ndeg      = 0;
02885     nvrt      = 0;
02886     ok        = True;
02887
02888     tcpl0 = 0;
02889     for (j = 0; j < model->ncouple; j++) {
02890         clist[j] = clst[j];
02891         tcpl0 += clist[j];
02892     }
02893     for (j = 0; j < nclass; j++) {
02894         cp = cpl[j];
02895         if (cp > 0) {
02896             lp2 = cpl[j] - cdeg[j] + 2;
02897             if (lp2 % 2 != 0 || lp2 < 0) {
02898                 if (prlevel > 0) {
02899                     fprintf(GRCC_Stderr, "*** SProcess::SProcess: illegal loop: "
02900                             "class %d, cp=%d, deg=%d, lp2=%d\n",
02901                             j, cp, cdeg[j], lp2);
02902                 }
02903                 ok = False;
02904             }
02905         }
02906         tCouple += cp*cnum[j];
02907         ndeg    += cdeg[j]*cnum[j];
02908
02909         if (!isATExternal(ctyp[j])) {
02910             nvrt += cnum[j];
02911         } else if (isATExternal(ctyp[j])) {
02912             if (model->normalParticle(ptcl[j]) == 0) {
02913                 if (prlevel > 0) {
02914                     fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
02915                     fprintf(GRCC_Stderr, "illegal particle code: ");
02916                     fprintf(GRCC_Stderr, "code: class %d, ptcl=%d\n", j, ptcl[j]);
02917                 }
02918                 ok = False;
02919             } else {
02920                 nExtern += cnum[j];
02921             }
02922             extperm *= factorial(cnum[j]);
02923         } else {
02924             if (prlevel > 0) {
02925                 fprintf(GRCC_Stderr, "*** SProcess::SProcess: illegal type: ");
02926                 fprintf(GRCC_Stderr, "class %d, type=%d\n", j, ctyp[j]);
02927             }
02928             ok = False;
02929         }
02930     }
02931 }
02932 if (tcpl0 != tCouple) {
02933     if (prlevel > 0) {
02934         fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
02935         fprintf(GRCC_Stderr, "illegal coupling constants:");
02936         fprintf(GRCC_Stderr, " %d != %d\n", tcpl0, tCouple);
02937     }
02938     ok = False;
02939 }
02940 if (ndeg == nExtern) {
02941     if (prlevel > 0) {
02942         fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
02943         fprintf(GRCC_Stderr, "no vertices: ");
02944         fprintf(GRCC_Stderr, "nExtern=%d, ndeg=%d\n", nExtern, ndeg);
02945     }
02946     ok = False;

```

```

02947     }
02948     if (ndeg % 2 == 0) {
02949         nEdges = ndeg/2;
02950     } else {
02951         if (prlevel > 0) {
02952             fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
02953             fprintf(GRCC_Stderr, "illegal total deg = %d (not even)\n", ndeg);
02954         }
02955         ok = False;
02956     }
02957     nNodes = nvrt + nExtern;
02958     if (nNodes >= GRCC_MAXNODES) {
02959         if (prlevel > 0) {
02960             fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
02961             fprintf(GRCC_Stderr, "too many nodes = %d\n", nNodes);
02962             fprintf(GRCC_Stderr, "    nExtern=%d, nvrt=%d (GRCC_MAXNODES)\n",
02963                 nExtern, nvrt);
02964         }
02965         ok = False;
02966     }
02967     if (!ok) {
02968         prSProcess();
02969         erEnd("SProcess::SProcess: illegal input");
02970     }
02971     if (proc == NULL) {
02972         opt->beginProc(NULL);
02973     }
02974
02975     lp2 = tCouple - nExtern + 2;
02976     if (lp2 % 2 != 0 || lp2 < 0) {
02977         if (prlevel > 0) {
02978             fprintf(GRCC_Stderr, "*** SProcess::SProcess: illegal loop: "
02979                 "tCouple=%d, nExtern=%d, 2*loop=%d\n",
02980                 tCouple, nExtern, lp2);
02981         }
02982         ok = False;
02983     }
02984     loop = lp2/2;
02985
02986     // stack for assignment
02987     if (opt->values[GRCC_OPT_Step] == GRCC_AGraph) {
02988         astack = new AStack(GRCC_MAXNSTACK, GRCC_MAXESTACK);
02989     }
02990
02991     // save to PNodeClass object
02992     pnclass = new PNodeClass(this, nNodes, nclass, cdeg, ctyp, ptcl, cpl, cnum, cmind, cmaxd);
02993 }
02994
02995 //-----
02996 SProcess::SProcess(Model *mdl, Process *prc, Options *opts, int sid, int *clst, int ncls, NCInput
02997 *cls)
02998 {
02999     // Construct a Subprocess object
03000     //   mdl           : model
03001     //   prc           : process (may be NULL)
03002     //   opts          : options
03003     //   sid           : id of the sprocess
03004     //   ncls          : the number of classes
03005     //   cls           : input data of classes
03006
03007     int j, cp, lp2, ndeg, nvrt, tcp10;
03008     bool ok;
03009
03010     if (ncls < 1) {
03011         fprintf(GRCC_Stderr, "*** SProcess::SProcess: no class %d\n", ncls);
03012         erEnd("SProcess::SProcess: no Class");
03013     }
03014     id = sid;
03015     model = mdl;
03016     proc = prc;
03017     opt = opts;
03018     nclass = ncls;
03019
03020     nNodes = 0;
03021     nEdges = 0;
03022     nExtern = 0;
03023     tCouple = 0;
03024     loop = 0;
03025     mgraph = NULL;
03026     egraph = NULL;
03027     astack = NULL;
03028
03029     mgrcount = 0;
03030     agrcount = 0;
03031     extperm = 1;
03032
03033     // the results of the graph generation

```

```

03033     nMGraphs = 0;                // the number of generated M-graphs
03034     nMOPI    = 0;                // the number of 1PI M-graphs
03035     wMGraphs.setValue(0,1);      // the weighted sum of M-graphs
03036     wMOPI.set  Value(0,1);       // the weighted sum of 1PI M-graphs
03037
03038     nAGraphs = 0;                // the number of generated A-graphs
03039     nAOPI    = 0;                // the number of 1PI A-graphs
03040     wAGraphs.setValue(0,1);      // the weighted sum of A-graphs
03041     wAOPI.set  Value(0,1);       // the weighted sum of 1PI A-graphs
03042
03043     // check input
03044     nNodes    = 0;
03045     nExtern    = 0;
03046
03047     ndeg      = 0;
03048     nvrt      = 0;
03049     ok = True;
03050
03051     tcpl0 = 0;
03052     for (j = 0; j < model->ncouple; j++) {
03053         clist[j] = clst[j];
03054         tcpl0 += clist[j];
03055     }
03056     for (j = 0; j < nclass; j++) {
03057         cp = cls[j].cple;
03058         if (cp > 0) {
03059             lp2 = cls[j].cple - cls[j].cldeg + 2;
03060             if (lp2 % 2 != 0 || lp2 < 0) {
03061                 if (prlevel > 0) {
03062                     fprintf(GRCC_Stderr, "*** SProcess::SProcess: illegal loop: "
03063                             "class %d, cp=%d, deg=%d, lp2=%d\n",
03064                             j, cp, cls[j].cldeg, lp2);
03065                 }
03066                 ok = False;
03067             }
03068         }
03069         tCouple += cp*cls[j].clnum;
03070         ndeg    += cls[j].cldeg*cls[j].clnum;
03071
03072         if (!isATEExternal(cls[j].cltyp)) {
03073             nvrt += cls[j].clnum;
03074         } else if (isATEExternal(cls[j].cltyp)) {
03075             if (model->normalParticle(cls[j].ptcl) == 0) {
03076                 if (prlevel > 0) {
03077                     fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
03078                     fprintf(GRCC_Stderr, "illegal particle code: ");
03079                     fprintf(GRCC_Stderr, "code: class %d, ptcl=%d\n", j, cls[j].ptcl);
03080                 }
03081                 ok = False;
03082             } else {
03083                 nExtern += cls[j].clnum;
03084             }
03085             extperm *= factorial(cls[j].clnum);
03086         } else {
03087             if (prlevel > 0) {
03088                 fprintf(GRCC_Stderr, "*** SProcess::SProcess: illegal type: ");
03089                 fprintf(GRCC_Stderr, "class %d, type=%d\n", j, cls[j].cltyp);
03090             }
03091             ok = False;
03092         }
03093     }
03094
03095     if (tcpl0 != tCouple) {
03096         if (prlevel > 0) {
03097             fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
03098             fprintf(GRCC_Stderr, "illegal coupling constants:");
03099             fprintf(GRCC_Stderr, " %d != %d\n", tcpl0, tCouple);
03100         }
03101         ok = False;
03102     }
03103
03104     if (ndeg == nExtern) {
03105         if (prlevel > 0) {
03106             fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
03107             fprintf(GRCC_Stderr, "no vertices: ");
03108             fprintf(GRCC_Stderr, "nExtern=%d, ndeg=%d\n", nExtern, ndeg);
03109         }
03110         ok = False;
03111     }
03112     if (ndeg % 2 == 0) {
03113         nEdges = ndeg/2;
03114     } else {
03115         if (prlevel > 0) {
03116             fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
03117             fprintf(GRCC_Stderr, "illegal total deg = %d (not even)\n", ndeg);
03118         }
03119         ok = False;
03120     }

```

```

03120     nNodes = nvrt + nExtern;
03121     if (nNodes >= GRCC_MAXNODES) {
03122         if (prlevel > 0) {
03123             fprintf(GRCC_Stderr, "*** SProcess::SProcess: ");
03124             fprintf(GRCC_Stderr, "too many nodes = %d\n", nNodes);
03125             fprintf(GRCC_Stderr, "    nExtern=%d, nvrt=%d (GRCC_MAXNODES)\n",
03126                 nExtern, nvrt);
03127         }
03128         ok = False;
03129     }
03130     if (!ok) {
03131         erEnd("SProcess::SProcess: illegal input");
03132     }
03133     if (proc == NULL) {
03134         opt->beginProc(NULL);
03135     }
03136
03137     lp2 = tCouple - nExtern + 2;
03138     if (lp2 % 2 != 0 || lp2 < 0) {
03139         if (prlevel > 0) {
03140             fprintf(GRCC_Stderr, "*** SProcess::SProcess: illegal loop: "
03141                 "tCouple=%d, nExtern=%d, 2*loop=%d\n",
03142                 tCouple, nExtern, lp2);
03143         }
03144         ok = False;
03145     }
03146     loop = lp2/2;
03147
03148     // stack for assignment
03149     if (opt->values[GRCC_OPT_Step] == GRCC_AGraph) {
03150         astack = new AStack(GRCC_MAXNSTACK, GRCC_MAXESTACK);
03151     }
03152
03153     // save to PNodeClass object
03154     pnclass = new PNodeClass(this, nNodes, nclass, cls);
03155 }
03156
03157 //-----
03158 SProcess::~SProcess(void)
03159 {
03160     delete pnclass;
03161     delete astack;
03162     delete mgraph;
03163     model = NULL;
03164 }
03165
03166 //-----
03167 void SProcess::prSProcess(void)
03168 {
03169     printf("\n");
03170     printf("+++ Subprocess %d, class=%d\n", id, nclass);
03171     if (pnclass != NULL) {
03172         pnclass->prPNodeClass();
03173     } else {
03174         printf("    pnclass = NULL\n");
03175     }
03176 }
03177
03178 //-----
03179 BigInt SProcess::generate(void)
03180 {
03181     // Entry point of Feynman graph generation
03182     int cldeg[GRCC_MAXNODES], clnum[GRCC_MAXNODES], cltyp[GRCC_MAXNODES];
03183     int cmind[GRCC_MAXNODES], cmaxd[GRCC_MAXNODES];
03184     int ncl;
03185     BigInt ng;
03186
03187     ncl = toMNodeClass(cltyp, cldeg, clnum, cmind, cmaxd);
03188
03189     opt->beginSubProc(this);
03190
03191     mgraph = new MGraph(id, ncl, cldeg, clnum, cltyp, cmind, cmaxd, opt);
03192
03193     ng = mgraph->generate();
03194
03195     opt->endSubProc();
03196
03197     delete mgraph;
03198     mgraph = NULL;
03199
03200     return ng;
03201 }
03202
03203 //-----
03204 int SProcess::toMNodeClass(int *cltyp, int *cldeg, int *clnum, int *cmind, int *cmaxd)
03205 {
03206     int j;

```



```

03207
03208     for (j = 0; j < nclass; j++) {
03209         if (isATExternal(pnclass->type[j])) {
03210             cltyp[j] = -1;
03211         } else {
03212             cltyp[j] = (pnclass->couple[j]-pnclass->deg[j]+2)/2;
03213         }
03214         cldeg[j] = pnclass->deg[j];
03215         clnum[j] = pnclass->count[j];
03216         cmind[j] = pnclass->cminddeg[j];
03217         cmaxd[j] = pnclass->cmaxdeg[j];
03218     }
03219     return nclass;
03220 }
03221
03222 //-----
03223 void SProcess::assign(MGraph *mgr)
03224 {
03225     PNodeClass *pnc;
03226
03227     pnc = match(mgr);
03228
03229     agraph = new Assign(this, mgr, pnc);
03230
03231 #ifdef CHECK
03232     agraph->checkAG("SProcess::assign");
03233 #endif
03234     delete pnc;
03235     delete agraph;
03236     agraph = NULL;
03237 }
03238
03239 //-----
03240 PNodeClass *SProcess::match(MGraph *mgr)
03241 {
03242     PNodeClass *pnc = NULL;
03243
03244     int typ[GRCC_MAXNODES], dgs[GRCC_MAXNODES];
03245     int cnt[GRCC_MAXNODES], ptcl[GRCC_MAXNODES];
03246     int cpl[GRCC_MAXNODES];
03247     int n2m[GRCC_MAXNODES];
03248     int cmind[GRCC_MAXNODES], cmaxd[GRCC_MAXNODES];
03249     int j, k, l, nd, mc, mcl, mclss;
03250
03251     if (mgr->nNodes != nNodes) {
03252         if (prlevel > 0) {
03253             fprintf(GRCC_Stderr, "*** SProcess::match: different nNodes=%d != %d\n",
03254                 nNodes, mgr->nNodes);
03255         }
03256         erEnd("SProcess::match: different nNodes");
03257     }
03258
03259     mcl = toMNodeClass(typ, dgs, cnt, cmind, cmaxd);
03260
03261     nd = 0;
03262     for (j = 0; j < mcl; j++) {
03263         for (k = 0; k < cnt[j]; k++, nd++) {
03264             n2m[nd] = j;
03265         }
03266     }
03267
03268     nd = 0;
03269     mclss = mgr->curcl->nClasses;
03270     for (j = 0; j < mclss; j++) {
03271         for (k = 0; k < mgr->curcl->clist[j]; k++, nd++) {
03272             mc = mgr->nodes[nd]->clss;
03273             if (mc != n2m[nd]) {
03274                 if (prlevel > 0) {
03275                     fprintf(GRCC_Stderr, "*** SProcess::match: ");
03276                     fprintf(GRCC_Stderr, "inconsistent class\n");
03277                     for (l = 0; l < nNodes; l++) {
03278                         fprintf(GRCC_Stderr, "      %d: %d, %d\n",
03279                             j, mgr->nodes[l]->clss, n2m[l]);
03280                     }
03281                 }
03282                 erEnd("SProcess::match: inconsistent class");
03283             }
03284         }
03285     }
03286     for (j = 0; j < mcl; j++) {
03287         dgs[j] = pnclass->deg[j];
03288         typ[j] = pnclass->type[j];
03289         ptcl[j] = pnclass->particle[j];
03290         cnt[j] = pnclass->count[j];
03291         cpl[j] = pnclass->couple[j];
03292         cmind[j] = pnclass->cminddeg[j];
03293         cmaxd[j] = pnclass->cmaxdeg[j];

```

```

03294     }
03295     pnc = new PNodeClass(this, nNodes, mcl, dgs, typ, ptcl, cpl, cnt, cmind, cmaxd);
03296
03297     return pnc;
03298 }
03299
03300 //-----
03301 void SProcess::resultMGraph(BigInt nmgraphs, Fraction mwsum, BigInt nmopi, Fraction mwopi)
03302 {
03303     nMGraphs += nmgraphs;
03304     nMOPI    += nmopi;
03305     wMGraphs.add(mwsum);
03306     wMOPI.add(mwopi);
03307 }
03308
03309 //-----
03310 void SProcess::resultAGraph(BigInt nmgraphs, Fraction mwsum, BigInt nmopi, Fraction mwopi)
03311 {
03312     nAGraphs += nmgraphs;
03313     nAOPI    += nmopi;
03314     wAGraphs.add(mwsum);
03315     wAOPI.add(mwopi);
03316 }
03317
03318 //-----
03319 void SProcess::endMGraph(MGraph *mgr)
03320 {
03321     egraph = mgr->egraph;
03322
03323     if (opt->values[GRCC_OPT_Step] != GRCC_MGraph) {
03324         assign(mgr);
03325     }
03326 }
03327
03328 //-----
03329 void SProcess::endAGraph(EGraph *egr)
03330 {
03331     egraph = egr;
03332 }
03333
03334
03335 //=====
03336 // class Process
03337 //-----
03338 Process::Process(int pid, Model *modl, Options *optn, int nini, int *intlPrt, int nfin, int *finlPrt,
03339 int *coupling)
03340 {
03341     // Define a process and construct a set of sprocesses
03342     // model      : Model object
03343     // optn       : Option object
03344     // initlPart  : list of particle-id of initlPart particles
03345     // finalPart  : list of particle-id of final particles
03346     // coupling   : list of coupling constants
03347
03348     int j, lp2;
03349     Bool ok;
03350     char buff[MAXSTR];
03351
03352     id      = pid;
03353     model   = modl;
03354     opt     = optn;
03355     ninitl  = nini;
03356     nfinal  = nfin;
03357     initlPart = intdup(ninitl, intlPrt);
03358     finalPart = intdup(nfinal, finlPrt);
03359
03360     // count total number of coupling constants.
03361     cttotal = 0;
03362     for (j = 0; j < GRCC_MAXNCPLG; j++) {
03363         if (j < model->ncouple) {
03364             clist[j] = coupling[j];
03365             cttotal += coupling[j];
03366         } else {
03367             clist[j] = 0;
03368         }
03369     }
03370     if (cttotal < 1) {
03371         erEnd("Process: coupling constant = 0");
03372     }
03373
03374     nExtern = 0;
03375     loop    = -1;
03376     maxnlegs = 0;
03377     mgrcount = 0;
03378     agrcount = 0;
03379
03380     // table of sprocesses

```

```

03380     nSubproc = 0;
03381     sproc = NULL;
03382
03383     // the results of the graph generation
03384     nMGraphs = 0; // the number of generated M-graphs
03385     nMOPI = 0; // the number of 1PI M-graphs
03386     wMGraphs.setValue(0,1); // the weighted sum of M-graphs
03387     wMOPI.setValue(0,1); // the weighted sum of 1PI M-graphs
03388
03389     nAGraphs = 0; // the number of generated A-graphs
03390     nAOPI = 0; // the number of 1PI A-graphs
03391     wAGraphs.setValue(0,1); // the weighted sum of A-graphs
03392     wAOPI.setValue(0,1); // the weighted sum of 1PI A-graphs
03393
03394     ok = True;
03395
03396     // numbers
03397     nExtern = ninitl + nfinal;
03398     maxnlegs = Max(nExtern, model->maxnlegs);
03399
03400     // count loops
03401     lp2 = cttotal - nExtern + 2;
03402     if (lp2 % 2 != 0) {
03403         if (prlevel > 0) {
03404             fprintf(GRCC_Stderr, "*** cannot generate : 2*loop is odd : "
03405                 "2*loop = %d, cttotal=%d, nExtern=%d\n",
03406                 lp2, cttotal, nExtern);
03407         }
03408         ok = False;
03409     } else if (lp2 < 0) {
03410         if (prlevel > 0) {
03411             fprintf(GRCC_Stderr, "*** cannot make a connected graph : "
03412                 "2*loop=%d, cttotal=%d, nExtern=%d\n",
03413                 lp2, cttotal, nExtern);
03414         }
03415         ok = False;
03416     }
03417
03418     loop = lp2 / 2;
03419
03420     if (!ok) {
03421         if (prlevel > 0) {
03422             fprintf(GRCC_Stderr, "*** Process: illegal input: lp2 = %d\n", lp2);
03423         }
03424         erEnd("Process: illegal input");
03425     }
03426
03427     if (opt->out->outgrp != NULL) {
03428         snprintf(buff, MAXSTR, "out%d.prp", pid);
03429         prProcessP(buff);
03430     }
03431
03432     // construct sprocesses
03433     mkSProcess();
03434 }
03435
03436 //-----
03437 Process::~Process(void)
03438 {
03439     initlPart = delintdup(initlPart);
03440     finalPart = delintdup(finalPart);
03441     for (int j = 0; j < nSubproc; j++) {
03442         delete sptbl[j];
03443     }
03444     // delete sproc;
03445 }
03446
03447 //-----
03448 void Process::prProcess(void)
03449 {
03450     printf("+++ process options : OPI = %d, (Step) = %d, coupling=%d: ",
03451         opt->values[GRCC_OPT_1PI], opt->values[GRCC_OPT_Step], cttotal);
03452     prIntArray(model->ncouple, clist, "\n");
03453 }
03454
03455 //-----
03456 void Process::prProcessP(const char *fname)
03457 {
03458     FILE *fp;
03459
03460     if ((fp = fopen(fname, "w")) == NULL) {
03461         fprintf(GRCC_Stderr, "*** cannot open \"%s\"\n", fname);
03462         return;
03463     }
03464     fprintf(fp, "Process = {\n");
03465     outProcP(fp);
03466     fprintf(fp, "};\n");

```

```

03467     fclose(fp);
03468 }
03469
03470 //-----
03471 void Process::outProcP(FILE *fp)
03472 {
03473     int    j;
03474
03475     if (model == NULL) {
03476         return;
03477     }
03478     fprintf(fp, "    \\Model\\": \"%s\\",\n", model->name);
03479     fprintf(fp, "    \\Initial\\": [");
03480     for (j = 0; j < ninitl; j++) {
03481         if (j != 0) {
03482             fprintf(fp, ", ");
03483         }
03484         fprintf(fp, "\"%s\"", model->particleName(initlPart[j]));
03485     }
03486     fprintf(fp, "],\n");
03487     fprintf(fp, "    \\Final\\": [");
03488     for (j = 0; j < nfinal; j++) {
03489         if (j != 0) {
03490             fprintf(fp, ", ");
03491         }
03492         fprintf(fp, "\"%s\"", model->particleName(finalPart[j]));
03493     }
03494     fprintf(fp, "],\n");
03495     fprintf(fp, "    \\Couple\\": [");
03496     for (j = 0; j < model->ncouple; j++) {
03497         if (j != 0) {
03498             fprintf(fp, ", ");
03499         }
03500         fprintf(fp, "%d", clist[j]);
03501     }
03502     fprintf(fp, "],\n");
03503     fprintf(fp, "    \\Options\\": {\n");
03504     for (j = 0; j < GRCC_OPT_Size; j++) {
03505         if (j == GRCC_OPT_Outgrf || j == GRCC_OPT_Outgrp) {
03506             continue;
03507         }
03508         fprintf(fp, "        \"%s\":%d,\n", optDef[j].name, opt->values[j]);
03509     }
03510     fprintf(fp, "        \"%s\":", optDef[GRCC_OPT_Outgrf].name);
03511     if (opt->out->outgrf != NULL) {
03512         fprintf(fp, "\"%s\\",\n", opt->out->outgrf);
03513     } else {
03514         fprintf(fp, "0,\n");
03515     }
03516     fprintf(fp, "        \"%s\":", optDef[GRCC_OPT_Outgrp].name);
03517     if (opt->out->outgrp != NULL) {
03518         fprintf(fp, "\"%s\\",\n", opt->out->outgrp);
03519     } else {
03520         fprintf(fp, "0,\n");
03521     }
03522     fprintf(fp, "    }\n");
03523 }
03524
03525 //-----
03526 void Process::mkSProcess(void)
03527 {
03528     // Construct sprocesses
03529     // Each sprocess is a set of nodes whose degree and order of
03530     // coupling constants are determined.
03531     // Only the total coupling constants are considered here even if
03532     // two or more coupling constants are defined in the model
03533
03534     NCInput cls[GRCC_MAXMINTERACT];
03535     int r, j, k, lin2, nvtx, nleg, nc, n0;
03536     int nl[GRCC_MAXMINTERACT];
03537     double proct0 = 0, proct1 = 0;
03538
03539     if (model->ncplgcp < 1) {
03540         erEnd("function 'addInteractionEnd' has not been called");
03541     }
03542     // output file to start process
03543     opt->beginProc(this);
03544
03545     // starting time
03546     Second(&proct0);
03547
03548     // generate all possible number of (nl[i]),
03549     //   \\sum_i nl[i]*cplgcp[i] = (total number of coupling constants)
03550
03551     r = -1;
03552     nSubproc = 0;
03553     ngraphs = 0;

```

```

03554     nopi      = 0;
03555     wgraphs   = 0;
03556     wopi      = 0;
03557
03558     // for partitions of (leg, order)
03559
03560     while (nextPart(ctotal, model->ncplgcp, model->cplgcp, nl, &r)) {
03561         // count the total number of vertices and legs.
03562         nvtx = 0;
03563         nleg = 0;
03564         for (j = 0; j < model->ncplgcp; j++) {
03565             nvtx += nl[j];
03566             nleg += nl[j]*model->cplglg[j];
03567         }
03568
03569         // count loops
03570         lin2 = nExtern + nleg;
03571         if (lin2 % 2 != 0) {
03572             continue;
03573         }
03574         loop = lin2/2 - nExtern - nvtx + 1;
03575         if (loop < 0) {
03576             continue;
03577         }
03578
03579         nc = 0;
03580         if (opt->values[GRCC_OPT_SymmInitial]) {
03581             n0 = nc;
03582             for (j = 0; j < ninitl; j++) {
03583                 for (k = n0; k < nc; k++) {
03584                     if (cls[k].ptcl == initlPart[j]) {
03585                         cls[k].clnum++;
03586                         break;
03587                     }
03588                 }
03589                 if (k >= nc) {
03590                     cls[nc].ptcl = initlPart[j];
03591                     cls[nc].clnum = 1;
03592                     cls[nc].cple = 0;
03593                     cls[nc].clnum = 1;
03594                     cls[nc].cldeg = 1;
03595                     cls[nc].cltyp = GRCC_AT_Initial;
03596                     cls[nc].ptcl = initlPart[j];
03597                     cls[nc].cmind
03598                         = model->particles[Abs(cls[nc].ptcl)]->cmindeg;
03599                     cls[nc].cmaxd
03600                         = model->particles[Abs(cls[nc].ptcl)]->cmaxdeg;
03601                     if (opt->values[GRCC_OPT_NoExtSelf] > 0 && nExtern > 2) {
03602                         cls[nc].cmind = Max(cls[nc].cmind, 3);
03603                     }
03604                     nc++;
03605                 }
03606             }
03607         } else {
03608             for (j = 0; j < ninitl; j++) {
03609                 cls[nc].ptcl = initlPart[j];
03610                 cls[nc].clnum = 1;
03611                 cls[nc].cple = 0;
03612                 cls[nc].cldeg = 1;
03613                 cls[nc].cltyp = GRCC_AT_Initial;
03614                 cls[nc].cmind = model->particles[Abs(cls[nc].ptcl)]->cmindeg;
03615                 cls[nc].cmaxd = model->particles[Abs(cls[nc].ptcl)]->cmaxdeg;
03616                 if (opt->values[GRCC_OPT_NoExtSelf] > 0 && nExtern > 2) {
03617                     cls[nc].cmind = Max(cls[nc].cmind, 3);
03618                 }
03619                 nc++;
03620             }
03621         }
03622         if (opt->values[GRCC_OPT_SymmFinal]) {
03623             n0 = nc;
03624             for (j = 0; j < nfinal; j++) {
03625                 for (k = n0; k < nc; k++) {
03626                     if (cls[k].ptcl == model->antiParticle(finalPart[j])) {
03627                         cls[k].clnum++;
03628                         break;
03629                     }
03630                 }
03631                 if (k >= nc) {
03632                     cls[nc].ptcl = model->antiParticle(finalPart[j]);
03633                     cls[nc].clnum = 1;
03634                     cls[nc].cple = 0;
03635                     cls[nc].cldeg = 1;
03636                     cls[nc].cltyp = GRCC_AT_Final;
03637                     cls[nc].cmind
03638                         = model->particles[Abs(cls[nc].ptcl)]->cmindeg;
03639                     cls[nc].cmaxd
03640                         = model->particles[Abs(cls[nc].ptcl)]->cmaxdeg;

```

```

03641         if (opt->values[GRCC_OPT_NoExtSelf] > 0 && nExtern > 2) {
03642             cls[nc].cmind = Max(cls[nc].cmind, 3);
03643         }
03644         nc++;
03645     }
03646 }
03647 } else {
03648     for (j = 0; j < nfinal; j++) {
03649         cls[nc].ptcl = model->antiParticle(finalPart[j]);
03650         cls[nc].cldeg = 1;
03651         cls[nc].cple = 0;
03652         cls[nc].clnum = 1;
03653         cls[nc].cltyp = GRCC_AT_Final;
03654         cls[nc].cmindeg = model->particles[Abs(cls[nc].ptcl)]->cmindeg;
03655         cls[nc].cmaxd = model->particles[Abs(cls[nc].ptcl)]->cmaxdeg;
03656         if (opt->values[GRCC_OPT_NoExtSelf] > 0 && nExtern > 2) {
03657             cls[nc].cmind = Max(cls[nc].cmind, 3);
03658         }
03659         nc++;
03660     }
03661 }
03662 for (j = 0; j < model->ncplgcp; j++) {
03663     if (nl[j] > 0) {
03664         cls[nc].ptcl = 0;
03665         cls[nc].cple = model->cplgcp[j];
03666         cls[nc].cldeg = model->cplglg[j];
03667         cls[nc].clnum = nl[j];
03668         // number of loops
03669         cls[nc].cltyp = (model->cplgcp[j] - model->cplglg[j] + 2)/2;
03670         cls[nc].cmind = 0;
03671         cls[nc].cmaxd = 0;
03672         nc++;
03673     }
03674 }
03675 // create a sprocess ??? to be rewritten
03676 sproc = new SProcess(model, this, opt, nSubproc, clist, nc, cls);
03677
03678 // list of sprocesses
03679 if (nSubproc >= GRCC_MAXSUBPROCS) {
03680     erEnd("Subclass: too many sprocesses (GRCC_MAXSUBPROCS)");
03681 }
03682 sptbl[nSubproc++] = sproc;
03683
03684 // generate M-graphs
03685 sproc->generate();
03686
03687 // summation of the numbers and weighted numbers of graphs
03688 nMGraphs += sproc->nMGraphs;
03689 nMOPI += sproc->nMOPI;
03690 wMGraphs.add(sproc->wMGraphs);
03691 wMOPI.add(sproc->wMOPI);
03692
03693 nAGraphs += sproc->nAGraphs;
03694 nAOPI += sproc->nAOPI;
03695 wAGraphs.add(sproc->wAGraphs);
03696 wAOPI.add(sproc->wAOPI);
03697
03698 if (nAGraphs > 0) {
03699     ngraphs = nAGraphs;
03700 } else {
03701     ngraphs = nAGraphs;
03702 }
03703 // delete sproc;
03704 // sproc = NULL;
03705 }
03706
03707 // ending time
03708 Second(&proct1);
03709 sec = proct1-proct0;
03710
03711 // output file to finish process
03712 opt->endProc();
03713 }
03714
03715 //*****
03716 // mgraph.cc
03717 //=====
03718 //-----
03719 MNodeClass::MNodeClass(int nnodes, int nclasses)
03720 {
03721     // Input
03722     // nnodes : possible maximal number of nodes
03723     // nclasses : possible maximal number of classes
03724
03725     int j, k;
03726
03727     nNodes = nnodes;

```

```

03728     nClasses = nclasses;
03729     maxdeg   = 0;
03730     for (j = 0; j < nNodes; j++) {
03731         for (k = 0; k < nNodes; k++) {
03732             clmat[j][k] = 0;
03733         }
03734         clist[j] = 0;
03735         ndcl[j] = 0;
03736         flist[j] = 0;
03737         clord[j] = 0;
03738         cmindeg[j] = 0;
03739         cmaxdeg[j] = 0;
03740     }
03741     flist[nNodes] = 0;
03742     flg0 = 0;
03743     flg1 = 0;
03744     flg2 = 0;
03745 }
03746
03747 //-----
03748 MNodeClass::~MNodeClass(void)
03749 {
03750 }
03751
03752 //=====
03753 // class MNodeClass
03754 //-----
03755 void MNodeClass::init(int *cl, int mxdeg, int **adjmat)
03756 {
03757     // initialize the object
03758     // Argument
03759     //   cl[j]           : list of number of nodes in the j-th class
03760     //   mxdeg          : maximum degree to nodes
03761     //   adjmat[j][k]   : adjacency matrix
03762
03763     int j;
03764
03765     for (j = 0; j < nClasses; j++) {
03766         clist[j] = cl[j];
03767         clord[j] = j;
03768     }
03769     maxdeg = mxdeg;
03770     mkNdCl();
03771     mkClMat(adjmat);
03772     mkFlist();
03773     flg0 = 0;
03774     flg1 = 0;
03775     flg2 = 0;
03776 }
03777
03778 //-----
03779 void MNodeClass::copy(MNodeClass* mnc)
03780 {
03781     // copy MNodeClass 'mnc' to this object
03782
03783     int j, k;
03784
03785     nClasses = mnc->nClasses;
03786     for (k = 0; k < nClasses; k++) {
03787         clist[k] = mnc->clist[k];
03788     }
03789     maxdeg = mnc->maxdeg;
03790     for (j = 0; j < nNodes; j++) {
03791         ndcl[j] = mnc->ndcl[j];
03792         clord[j] = mnc->clord[j];
03793         for (k = 0; k < nClasses; k++) {
03794             clmat[j][k] = mnc->clmat[j][k];
03795         }
03796     }
03797     for (k = 0; k < nClasses+1; k++) {
03798         flist[k] = mnc->flist[k];
03799     }
03800 }
03801
03802 //-----
03803 void MNodeClass::mkFlist(void)
03804 {
03805     // Construct flist
03806     //   The set of nodes in class 'c' is [flist[c],...,flist[c+1]-1]
03807
03808     int j, f;
03809
03810     f = 0;
03811     for (j = 0; j < nClasses; j++) {
03812         flist[j] = f;
03813         f += clist[j];
03814     }

```

```

03815     flist[nClasses] = f;
03816 }
03817
03818 //-----
03819 void MNodeClass::mkNdCl(void)
03820 {
03821     // Construct ndcl
03822     // ndcl[nd] = (the class id in which node 'nd' belongs)
03823
03824     int c, k;
03825     int nd = 0;
03826
03827     for (c = 0; c < nClasses; c++) {
03828         for (k = 0; k < clist[c]; k++) {
03829             ndcl[nd++] = c;
03830         }
03831     }
03832 }
03833
03834 //-----
03835 int MNodeClass::clCmp(int nd0, int nd1, int cn)
03836 {
03837     // Comparison of two nodes 'nd0' and 'nd1'
03838     // in lexicographic ordering of [class, connection configuration]
03839
03840     int cmp;
03841     // Whether two nodes are in a same class or not.
03842
03843     cmp = ndcl[nd0] - ndcl[nd1];
03844     if (cmp != 0) {
03845         return cmp;
03846     }
03847
03848     // Sign '-' signifies the reverse ordering
03849     cmp = - cmpMNCArray(clmat[nd0], clmat[nd1], cn);
03850     if (cmp != 0) {
03851         return cmp;
03852     }
03853     return cmp;
03854 }
03855
03856 //-----
03857 void MNodeClass::mkClMat(int **adjmat)
03858 {
03859     // Construct a matrix 'clmat[nd][tc]' which is the number
03860     // of edges connecting 'nd' and all nodes in class 'tc'.
03861
03862     int nd, td, tc;
03863
03864     for (nd = 0; nd < nNodes; nd++) {
03865         for (td = 0; td < nNodes; td++) {
03866             tc = ndcl[td]; // another node
03867             if (nd == td) {
03868                 clmat[nd][tc] += CLWIGHTD(adjmat[nd][td]);
03869             } else {
03870                 clmat[nd][tc] += CLWIGHTO(adjmat[nd][td]);
03871             }
03872         }
03873     }
03874 }
03875
03876 //-----
03877 void MNodeClass::incMat(int nd, int td, int val)
03878 {
03879     // Increase the number of edges by 'val' between 'nd' and 'td'.
03880
03881     int tdc = ndcl[td]; // class of 'td'
03882     clmat[nd][tdc] += val; // modify matrix 'clmat'.
03883 }
03884
03885 //-----
03886 void MNodeClass::printMat(void)
03887 {
03888     // Print configuration matrix.
03889
03890     int j1, j2;
03891
03892     printf("\n");
03893
03894     printf("nClasses=%d", nClasses);
03895     printf(" clord="); prIntArray(nClasses, clord, "");
03896     printf(" flist="); prIntArray(nClasses, flist, "\n");
03897     printf("flg = (%d, %d, %d)\n", flg0, flg1, flg2);
03898
03899     // the first line
03900     printf("nd: cl: ");
03901     for (j2 = 0; j2 < nClasses; j2++) {

```



```

03902         printf("%2d ", j2);
03903     }
03904     printf("\n");
03905
03906     // print raw
03907     for (j1 = 0; j1 < nNodes; j1++) {
03908         printf("%2d; %2d: [", j1, ndcl[j1]);
03909         for (j2 = 0; j2 < nClasses; j2++) {
03910             printf(" %2d", clmat[j1][j2]);
03911         }
03912         printf("]\n");
03913     }
03914 }
03915
03916 //-----
03917 int MNodeClass::cmpMNCArray(int *a0, int *a1, int ma)
03918 {
03919     int j, k;
03920
03921     for (k = 0; k < ma; k++) {
03922         j = clord[k];
03923         if (a0[j] < a1[j]) {
03924             return -1;
03925         } else if (a0[j] > a1[j]) {
03926             return 1;
03927         }
03928     }
03929     return 0;
03930 }
03931
03932 //-----
03933 void MNodeClass::reorder(MGraph *mg)
03934 {
03935     int flg[GRCC_MAXNODES];
03936     int co, cn;
03937     int f0, f1, f2;
03938
03939     f0 = 0;
03940     f1 = 0;
03941     f2 = 0;
03942     for (co = 0; co < nClasses; co++) {
03943         cn = flist[co];
03944         if (mg->nodes[cn]->freelg < 1) {
03945             flg[co] = 0;
03946             f0++;
03947         } else if (mg->nodes[cn]->freelg < mg->nodes[cn]->deg) {
03948             flg[co] = mg->nodes[cn]->deg + maxdeg*clist[co];
03949             f1++;
03950         } else {
03951             flg[co] = maxdeg*(mg->nodes[cn]->deg + maxdeg*clist[co]);
03952             f2++;
03953         }
03954     }
03955     if (f0 < nClasses) {
03956         bsort(nClasses, clord, flg);
03957     }
03958     flg0 = f0;
03959     flg1 = f0 + f1;
03960     flg2 = f0 + f1 + f2;
03961 }
03962
03963 //=====
03964 // class MNode : nodes in MGraph
03965 //-----
03966 MNode::MNode(int vid, int vclss, NCInput *mgi)
03967 {
03968     // Arguments
03969     // vid : identifier of the vertex
03970     // vdeg : degree of the node
03971     // vextlp : external node (-1) or looped vertex
03972     // vclss : class of the node
03973
03974     id = vid; // id of the node
03975     clss = vclss; // class to which the node belongs
03976     deg = mgi->cldeg; // degree of the node
03977     freelg = mgi->cldeg; // number of free legs
03978     extloop = mgi->cltyp; // external node or not
03979     cmindeg = mgi->cmindeg; // min(deg of connectable vertex)
03980     cmaxdeg = mgi->cmaxdeg; // max(deg of connectable vertex)
03981 }
03982
03983 //-----
03984 MNode::MNode(int vid, int vdeg, int vextlp, int vclss, int cmin, int cmax)
03985 {
03986     // Arguments
03987     // vid : identifier of the vertex
03988     // vdeg : degree of the node

```

```

03989 // vextlp : external node (-1) or looped vertex
03990 // vclss : class of the node
03991
03992 id      = vid;      // id of the node
03993 deg     = vdeg;     // degree of the node
03994 freelg  = vdeg;     // number of free legs
03995 clss    = vclss;    // class to which the node belongs
03996 extloop = vextlp;   // external node or not
03997 cmindeg = cmin;     // min(deg of connectable vertex)
03998 cmaxdeg = cmax;     // max(deg of connectable vertex)
03999 }
04000
04001 //=====
04002 // class MGraph : scalar graph expressed by matrix form
04003 //-----
04004 MGraph::MGraph(int pid, int ncl, int *cldeg, int *clnum, int *cltyp, int *cmind, int *cmaxd, Options
*opts)
04005 {
04006     int nn, ne, j, k;
04007
04008     // initial conditions
04009     nClasses = ncl;
04010     clist     = new int[ncl];
04011     opt       = opts;
04012     mId       = -1;
04013
04014     mindeg    = -1;
04015     maxdeg    = -1;
04016     ne = 0;
04017     nn = 0;
04018     for (j = 0; j < nClasses; j++) {
04019         clist[j] = clnum[j];
04020         nn += clnum[j];
04021         ne += cldeg[j]*clnum[j];
04022         if (mindeg < 0) {
04023             mindeg = cldeg[j];
04024         } else {
04025             mindeg = Min(mindeg, cldeg[j]);
04026         }
04027         if (maxdeg < 0) {
04028             maxdeg = cldeg[j];
04029         } else {
04030             maxdeg = Max(maxdeg, cldeg[j]);
04031         }
04032     }
04033     if (ne % 2 != 0) {
04034         if (prlevel > 0) {
04035             fprintf(GRCC_Stderr, "Sum of degrees are not even\n");
04036             for (j = 0; j < nClasses; j++) {
04037                 fprintf(GRCC_Stderr, "class %2d: %2d %2d %2d\n",
04038                     j, cldeg[j], clnum[j], cltyp[j]);
04039             }
04040         }
04041         erEnd("illegal degrees of nodes");
04042     }
04043     pId      = pid;
04044     nNodes   = nn;
04045     nodes    = new MNode*[nNodes];
04046     group    = new SGroup();
04047 #ifdef ORBITS
04048     orbits   = new MORbits();
04049 #endif
04050
04051     nEdges   = ne / 2;
04052     nLoops   = nEdges - nNodes + 1;
04053
04054     egraph   = new EGraph(nNodes, nEdges, maxdeg);
04055     nn = 0;
04056     nExtern  = 0;
04057     for (j = 0; j < nClasses; j++) {
04058         for (k = 0; k < clist[j]; k++, nn++) {
04059             nodes[nn] = new MNode(nn, cldeg[j], cltyp[j], j, cmind[j], cmaxd[j]);
04060             egraph->setExtLoop(nn, cltyp[j]);
04061             if (cltyp[j] < 0) {
04062                 nExtern++;
04063             }
04064         }
04065     }
04066     egraph->endSetExtLoop();
04067
04068     init();
04069 }
04070
04071 //-----
04072 MGraph::MGraph(int pid, int ncl, NCInput *mgi, Options *opts)
04073 {
04074     int nn, ne, j, k;

```

```

04075
04076 // initial conditions
04077 nClasses = ncl;
04078 clist    = new int[ncl];
04079 opt      = opts;
04080 mId      = -1;
04081
04082 mindeg   = -1;
04083 maxdeg   = -1;
04084 ne = 0;
04085 nn = 0;
04086 for (j = 0; j < nClasses; j++) {
04087     clist[j] = mgi[j].clnum;
04088     nn += mgi[j].clnum;
04089     ne += mgi[j].cldeg*mgi[j].clnum;
04090     if (mindeg < 0) {
04091         mindeg = mgi[j].cldeg;
04092     } else {
04093         mindeg = Min(mindeg, mgi[j].cldeg);
04094     }
04095     if (maxdeg < 0) {
04096         maxdeg = mgi[j].cldeg;
04097     } else {
04098         maxdeg = Max(maxdeg, mgi[j].cldeg);
04099     }
04100 }
04101 if (ne % 2 != 0) {
04102     if (prlevel > 0) {
04103         fprintf(GRCC_Stderr, "Sum of degrees are not even\n");
04104         for (j = 0; j < nClasses; j++) {
04105             fprintf(GRCC_Stderr, "class %2d: %2d %2d %2d\n",
04106                 j, mgi[j].cldeg, mgi[j].clnum, mgi[j].cltyp);
04107         }
04108     }
04109     erEnd("illegal degrees of nodes");
04110 }
04111 pId = pid;
04112 nNodes = nn;
04113 if (nNodes < 0) {
04114     printf("*** nNodes = %d\n", nNodes);
04115     erEnd("MGraph::MGraph : nNodes < 0");
04116 }
04117 nodes = new MNode*[nNodes];
04118 group = new SGroup();
04119 #ifdef ORBITS
04120 orbits = new MORbits();
04121 #endif
04122
04123 nEdges = ne / 2;
04124 nLoops = nEdges - nNodes + 1;
04125
04126 egraph = new EGraph(nNodes, nEdges, maxdeg);
04127 nn = 0;
04128 nExtern = 0;
04129 for (j = 0; j < nClasses; j++) {
04130     for (k = 0; k < clist[j]; k++, nn++) {
04131         nodes[nn] = new MNode(nn, j, mgi[j]);
04132         egraph->setExtLoop(nn, mgi[j].cltyp);
04133         if (mgi[j].cltyp < 0) {
04134             nExtern++;
04135         }
04136     }
04137 }
04138 egraph->endSetExtLoop();
04139
04140 init();
04141 }
04142
04143 //-----
04144 void MGraph::init(void)
04145 {
04146     // generated set of graphs
04147     cDiag = 0;
04148     cLPI = 0;
04149     cNoTadpole = 0;
04150     cNoTadBlock = 0;
04151     cLPINoTadBlock = 0;
04152
04153     // the current graph
04154     adjMat = newMat(nNodes, nNodes, 0);
04155     nsym = ToBigInt(0);
04156     esym = ToBigInt(0);
04157     wscon = Fraction(0, 1);
04158     wsopi = Fraction(0, 1);
04159
04160     // current node classification
04161     curcl = new MNodeClass(nNodes, nClasses);

```

```

04162
04163 // table of n-edge connected components
04164 mconn = new MConn(nNodes, nEdges);
04165
04166 // measures of efficiency
04167 ngen = 0;
04168 ngconn = 0;
04169
04170 #ifdef MONITOR
04171 nCallRefine = 0;
04172 discardRefine = 0;
04173 discardDisc = 0;
04174 discardIso = 0;
04175 #endif
04176
04177 // work space for isIsomorphic
04178 modmat = newMat(nNodes, nNodes, 0);
04179
04180 // work space for bisearchME
04181 bidef = newArray(nNodes, 0);
04182 bilow = newArray(nNodes, 0);
04183 bicol = newArray(nNodes, 0);
04184 bicount = 0;
04185 }
04186
04187 //-----
04188 MGraph::~MGraph(void)
04189 {
04190     int j;
04191
04192     // group->delGroup();
04193
04194     bicol = deleteArray(bicol);
04195     bilow = deleteArray(bilow);
04196     bidef = deleteArray(bidef);
04197
04198     modmat = deleteMat(modmat, nNodes);
04199     delete mconn;
04200     delete curcl;
04201     adjMat = deleteMat(adjMat, nNodes);
04202 #ifdef ORBITS
04203     delete orbits;
04204 #endif
04205 #endif
04206     delete egraph;
04207     delete group;
04208     for (j = 0; j < nNodes; j++) {
04209         delete nodes[j];
04210         nodes[j] = NULL;
04211     }
04212     delete[] nodes;
04213     delete[] clist;
04214 }
04215 }
04216
04217 //-----
04218 void MGraph::printAdjMat(MNodeClass *cl)
04219 {
04220     int j1, j2;
04221
04222     printf(" ");
04223     for (j2 = 0; j2 < nNodes; j2++) {
04224         printf(" %2d", j2);
04225     }
04226     printf("\n");
04227     for (j1 = 0; j1 < nNodes; j1++) {
04228         printf("%2d : [", j1);
04229         for (j2 = 0; j2 < nNodes; j2++) {
04230             printf(" %2d", adjMat[j1][j2]);
04231         }
04232         printf("] %2d\n", cl->ndcl[j1]);
04233     }
04234 }
04235
04236 //-----
04237 void MGraph::print(void)
04238 {
04239     int j;
04240
04241     printf("MGraph: pId=%d, cDiag=%ld, c1PI=%ld\n", pId, cDiag, c1PI);
04242     printf(" nNodes=%d, nEdges=%d, nExtern=%d, nLoops=%d "
04243            "mindeg=%d, maxdeg=%d, sym=(%ld, %ld)\n",
04244            nNodes, nEdges, nExtern, nLoops, mindeg, maxdeg, nsym, esym);
04245     printf(" Nodes=%d\n", nNodes);
04246     for (j = 0; j < nNodes; j++) {
04247         printf(" %2d: id=%d, deg=%d, clss=%d, extloop=%d, ",
04248            j, nodes[j]->id, nodes[j]->deg, nodes[j]->clss,

```

```

04249         nodes[j]->extloop);
04250         printf("mind=%d, maxd=%d, freelg=%d\n",
04251             nodes[j]->cmindeg, nodes[j]->cmaxdeg, nodes[j]->freelg);
04252     }
04253
04254     curcl->printMat();
04255     printf("\n");
04256
04257     printAdjMat(curcl);
04258 }
04259
04260 //-----
04261 void MGraph::printPy(FILE *fp, long mId)
04262 {
04263     fprintf(fp, "#TGraph : (gseq, gid, nodes, amat)\n");
04264     fprintf(fp, "(%ld, (%d, %d),\n", mId, pId, -1);
04265     fprintf(fp, " [ # nodes: (cid, deg0, loop, part)\n");
04266     for (int j = 0; j < nNodes; j++) {
04267         fprintf(fp, "      (%2d,%2d,%2d,%2d), # %2d\n",
04268             nodes[j]->class, nodes[j]->deg, nodes[j]->extloop, 0, j);
04269     }
04270     fprintf(fp, " ],\n");
04271     fprintf(fp, " [\n");
04272     fprintf(fp, " #");
04273     for (int j2 = 0; j2 < nNodes; j2++) {
04274         fprintf(fp, " %4d", j2);
04275     }
04276     fprintf(fp, "\n");
04277     for (int j1 = 0; j1 < nNodes; j1++) {
04278         fprintf(fp, "      [");
04279         for (int j2 = 0; j2 < nNodes; j2++) {
04280             fprintf(fp, " %2d, ", adjMat[j1][j2]);
04281         }
04282         fprintf(fp, "], # %2d\n", j1);
04283     }
04284     fprintf(fp, " ], # nodes\n");
04285     fprintf(fp, " [ # group of 2 elements\n");
04286     fprintf(fp, "      [],\n");
04287     fprintf(fp, " ], # group\n");
04288     fprintf(fp, " )\n");
04289 }
04290
04291 //-----
04292 Bool MGraph::isConnected(void)
04293 {
04294     // Check graph can be a connected one.
04295     // If a connected component without free leg is not the whole graph then
04296     // return False, otherwise return True.
04297
04298     int j, n, nv;
04299
04300     for (j = 0; j < nNodes; j++) {
04301         nodes[j]->visited = -1;
04302     }
04303     if (visit(0)) {
04304         return True;
04305     }
04306     nv = 0;
04307     for (n = 0; n < nNodes; n++) {
04308         if (nodes[n]->visited >= 0) {
04309             nv++;
04310         }
04311     }
04312     return (nv == nNodes);
04313 }
04314
04315 //-----
04316 Bool MGraph::visit(int nd)
04317 {
04318     // Visiting connected node used for 'isConnected'
04319     // If child nodes has free legs, then this function returns True.
04320     // otherwise it returns False.
04321
04322     int td;
04323
04324     // This node has free legs.
04325     if (nodes[nd]->freelg > 0) {
04326         return True;
04327     }
04328     nodes[nd]->visited = 0;
04329     for (td = 0; td < nNodes; td++) {
04330         if ((adjMat[nd][td] > 0) && (nodes[td]->visited < 0)) {
04331             if (visit(td)) {
04332                 return True;
04333             }
04334         }
04335     }

```

```

04336     // all the child nodes has no free legs.
04337     return False;
04338 }
04339
04340 //-----
04341 Bool MGraph::isIsomorphic(MNodeClass *cl)
04342 {
04343     // Check whether the current graph is the Representative
04344     // of a isomorphic class.
04345     // nsym = symmetry factor by the permutation of nodes.
04346     // esym = symmetry factor by the permutation of edge.
04347     // If this graph is not a representative, then returns False.
04348
04349     int j1, j2, cmp, nself;
04350     int *perm;
04351
04352     nsym = ToBigInt(0);
04353     esym = ToBigInt(1);
04354
04355     group->newGroup(nNodes, cl->nClasses, cl->clist);
04356
04357 #ifdef ORBITS
04358     orbits->initPerm(nNodes);
04359 #endif
04360
04361     while (True) {
04362         perm = group->genNext();
04363
04364         if (perm == NULL) {
04365             // calculate permutations of edges
04366             esym = ToBigInt(1);
04367             for (j1 = 0; j1 < nNodes; j1++) {
04368                 if (adjMat[j1][j1] > 0) {
04369                     nself = adjMat[j1][j1]/2;
04370                     esym *= factorial(nself);
04371                     esym *= ipow(2, nself);
04372                 }
04373                 for (j2 = j1+1; j2 < nNodes; j2++) {
04374                     if (adjMat[j1][j2] > 0) {
04375                         esym *= factorial(adjMat[j1][j2]);
04376                     }
04377                 }
04378             }
04379             return True;
04380         }
04381
04382         permMat(nNodes, perm, adjMat, modmat);
04383         cmp = compMat(nNodes, adjMat, modmat);
04384         if (cmp < 0) {
04385             return False;
04386         } else if (cmp == 0) {
04387             // if ngroup < 0, symmetry group is $S_{-group}$.
04388             group->addGroup(perm);
04389
04390             nsym = nsym + ToBigInt(1);
04391 #ifdef ORBITS
04392             orbits->fromPerm(perm);
04393 #endif
04394         }
04395     }
04396 }
04397
04398 //-----
04399 void MGraph::permMat(int size, int *perm, int **mat0, int **mat1)
04400 {
04401     // apply permutation to matrix 'mat0' and obtain 'mat1'
04402
04403     int j1, j2;
04404
04405     for (j1 = 0; j1 < size; j1++) {
04406         for (j2 = 0; j2 < size; j2++) {
04407             mat1[j1][j2] = mat0[perm[j1]][perm[j2]];
04408         }
04409     }
04410 }
04411
04412 //-----
04413 int MGraph::compMat(int size, int **mat0, int **mat1)
04414 {
04415     // comparison of matrix
04416
04417     int j1, j2, cmp;
04418
04419     for (j1 = 0; j1 < size; j1++) {
04420         for (j2 = 0; j2 < size; j2++) {
04421             cmp = mat0[j1][j2] - mat1[j1][j2];
04422             if (cmp != 0) {

```

```

04423         return cmp;
04424     }
04425 }
04426 }
04427 return 0;
04428 }
04429
04430 //-----
04431 MNodeClass *MGraph::refineClass(MNodeClass *cl)
04432 {
04433     // Refine the classification
04434     // cl : the current 'MNodeClass' object
04435     // cn : the class number
04436     // Returns (the new class number corresponds to 'cn') if OK, or
04437     // 'None' if ordering condition is not satisfied
04438
04439     MNodeClass *ccl = cl;
04440     MNodeClass *xcl = NULL;
04441     MNodeClass *ncl = NULL;
04442     int ucl[GRCC_MAXNODES];
04443     int ccn = cl->nClasses;
04444     int nucl, nce;
04445     int td, cmp;
04446     int nccl;
04447
04448 #ifdef MONITOR
04449     nCallRefine++;
04450 #endif
04451     nucl = 0;
04452     while (ccl->nClasses != nucl) { // repeat refinement.
04453         nce = 0;
04454         nucl = 0;
04455         for (td = 1; td < nNodes; td++) {
04456             // 'td' is the next node and the current node is 'td-1'.
04457             // Count up the number of the elements in the current class
04458             // corresponding to the current node
04459             nce++;
04460             cmp = ccl->clCmp(td-1, td, ccn);
04461
04462             // the ordering condition is not satisfied.
04463             if (cmp > 0) {
04464                 if (ccl != cl) {
04465                     delete ccl;
04466                 }
04467                 return NULL;
04468             } else if (cmp < 0) {
04469                 // 'td' is in the next class to the current node.
04470                 ucl[nucl++] = nce; // close the current class
04471
04472                 // start new class
04473                 nce = 0;
04474             }
04475             // nothing to do for the case of 'cmp == 0'.
04476         }
04477
04478         // close array 'ucl'.
04479         ucl[nucl++] = nce + 1;
04480
04481 #ifdef CHECK
04482         // inconsistent
04483         if (nucl < ccl->nClasses) {
04484             erEnd("refineClasses : smaller number of classes");
04485         }
04486 #endif
04487
04488         // preparation of the next repetition.
04489         xcl = new MNodeClass(nNodes, nucl);
04490         xcl->init(ucl, maxdeg, adjMat);
04491         ccn = xcl->nClasses;
04492
04493         nccl = ccl->nClasses;
04494
04495         if (ccl != cl) {
04496             delete ccl;
04497         }
04498         ccl = xcl;
04499         if (ccl->nClasses == nccl) {
04500             ccl->reorder(this);
04501             return ccl;
04502         }
04503     }
04504     nucl = 0;
04505 }
04506 return ncl;

```

```

04510 }
04511
04512 //-----
04513 void MGraph::biconnME(void)
04514 {
04515     // Count the number of lPI components.
04516
04517     int j, j1, root, vr, next, nart;
04518     MCopi mopi;
04519     MCBlock mblk;
04520     ULong momset;
04521
04522     // initialization
04523     bicount = 0;
04524     mconn->init();
04525     mconn->initCEdges(this);
04526
04527     for (j = 0; j < nNodes; j++) {
04528         bidef[j] = -1;
04529         bilow[j] = -1;
04530         bicol[j] = 0;
04531     }
04532     bipart = True;
04533
04534     // find a root for the root of bisearch
04535     // root must be an external node
04536     // or a vertex when there are not external nodes.
04537     root = -1;
04538     vr = -1;
04539     for (j = 0; j < nNodes; j++) {
04540         if (bidef[j] < 0) {
04541             if (isExternal(j)) {
04542                 root = j;
04543                 break;
04544             } else if (vr < 0) {
04545                 vr = j;
04546             }
04547         }
04548     }
04549     // case (2)
04550     if (root < 0) {
04551         root = vr;
04552     }
04553
04554     if (root >= 0) {
04555         bisearchME(root, -1, 0, 1, &mopi, &mblk, &momset, &next, &nart);
04556
04557         mconn->nlpopic = 0;
04558         mconn->nctopic = 0;
04559         for (j = 0; j < mconn->nopic; j++) {
04560             if (mconn->opics[j].loop > 0) {
04561                 mconn->nlpopic++;
04562             } else if (mconn->opics[j].ctloop > 0) {
04563                 mconn->nctopic++;
04564             }
04565         }
04566
04567         mconn->ne0bridges = 0;
04568         mconn->nelbridges = 0;
04569         for (j = 0; j < mconn->nbridges; j++) {
04570             if (mconn->bridges[j].next == 0) {
04571                 mconn->ne0bridges++;
04572             }
04573             if (mconn->bridges[j].next == 1) {
04574                 mconn->nelbridges++;
04575             }
04576         }
04577
04578         mconn->nselfloops = 0;
04579         for (j = 0; j < nNodes; j++) {
04580             mconn->nselfloops += adjMat[j][j]/2;
04581         }
04582
04583         mconn->nmultiedges = 0;
04584         for (j = 0; j < nNodes; j++) {
04585             for (j1 = j+1; j1 < nNodes; j1++) {
04586                 if (adjMat[j][j1] > 1) {
04587                     mconn->nmultiedges++;
04588                 }
04589             }
04590         }
04591
04592         mconn->nalblocks = 0;
04593         for (j = 0; j < mconn->nblocks; j++) {
04594             if (mconn->blocks[j].nartps == 1) {
04595                 mconn->nalblocks++;
04596             }
04597         }
04598     }
04599 }

```



```

04597     }
04598     mconn->nblocks = mconn->nblocks + mconn->nctopic;
04599
04600 #ifdef CHECK
04601     if (True) {
04602         if (isExternal(root)) {
04603             momset |= MASK(root);
04604         }
04605         ULong m = 0;
04606         for (j = 0; j < nExtern; j++) {
04607             m |= MASK(j);
04608         }
04609         bool ok = True;
04610         if (momset != m) {
04611             printf("*** momset = %ld != %ld\n", momset, m);
04612             ok = False;
04613         }
04614         if (mconn->nbacked != nLoops) {
04615             printf("*** nbacked = %d != %c\n", mconn->nbacked, nLoops);
04616             ok = False;
04617         }
04618         if (! ok) {
04619             print();
04620             egraph->print();
04621             mconn->print();
04622             erEnd("biconnME: illegal connection");
04623         }
04624     }
04625 #endif
04626
04627 // no vertex.
04628 } else {
04629     // no vertices
04630     // Connected ==> only when ex=2, loop=0
04631     mconn->nopic = 0;
04632     mconn->ne0bridges = 0;
04633     mconn->nelbridges = 0;
04634 }
04635 }
04636
04637 //-----
04638 void MGraph::bisearchME(int nd, int pd, int ned, int col,
04639     MCOpi *mopi, MCBlock *mblk, ULong *momset, int *next, int *nart)
04640 {
04641     // Search biconnected component
04642     // visit : pd --> nd --> td
04643     // ned : the number of edges between pd and nd.
04644     // Output
04645     //
04646     //      |
04647     //      x-----+
04648     //      |       |
04649     //      ----x pd |
04650     //      |       |
04651     //      x----x nd | n art. pints.
04652     //      | / \ |
04653     //      | / | \ |
04654     // m art p. x-x | x-x
04655     //          n1 x n3
04656     //          n2
04657     //
04658     // output of bisearchME(n1, nd, ...) ==> npart = m
04659     // output of bisearchME(n2, nd, ...) ==> npart = 1
04660     // output of bisearchME(n3, nd, ...) ==> npart = n
04661     //
04662     // output of bisearchME(nd, pd, ...) ==> npart = n+1
04663     // n1 => block of (m+1) articulation points
04664     // n2 => block of 2 articulation points
04665     // n3 => no block
04666     //
04667     Bool newv;
04668     int td, td0, lp, conn, next1, nart1, nart2, nvisit, ndart;
04669     int opit, opit0, blkt, l;
04670     MCOpi mopil;
04671     MCBlock mblk1;
04672     ULong momset1, momset2, momset3;
04673
04674     mopi->init();
04675     mblk->init();
04676
04677     *momset = 0; // # the set of momenta
04678     *next = 0; // # external below 'nd' inclusive
04679     *nart = 0; // # articulation points 'nd' inclusive
04680     nart1 = 0; // # articulation points below 'nd'
04681     nart2 = 0; // # 'nd' is articulation point then 1
04682     ndart = 0; // # the number of blocks attached to 'nd'
04683

```

```

04684     newv = (bidef[nd] < 0);
04685     if (! newv) {
04686         printf("*** nd=%d, pd=%d, bidef[nd]=%d\n", nd, pd, bidef[nd]);
04687         erEnd("bisearchME: illegal connection");
04688     }
04689
04690     bidef[nd] = bicount;
04691     bilow[nd] = bicount;
04692     bicol[nd] = col;
04693     bicount++;
04694
04695     opit0 = mconn->opistkptr;
04696
04697     if (pd < 0) {
04698         mconn->pushNode(nd);
04699     }
04700
04701     // external node and not the root
04702     if (isExternal(nd)) {
04703         if (pd >= 0) {
04704             // not the root
04705             *momset = MASK(nd);
04706             mopi->next = 1;
04707             mopi->nlegs = 1;
04708             mopi->mom0lg = 0;
04709             mblk->nartps = 1;
04710             *next = 1;
04711             *nart = 1;
04712             mconn->addCEdge(nd, pd, *momset);
04713             return;
04714         }
04715     }
04716
04717     nvisit = 0;
04718     td0 = -1;
04719     for (td = 0; td < nNodes; td++) {
04720         conn = adjMat[nd][td];
04721
04722         // td is not adjacent to nd
04723         if (conn < 1) {
04724             continue;
04725         }
04726         nvisit++;
04727         td0 = td;
04728
04729         momset1 = 0;
04730
04731         // external node
04732         if (isExternal(td) && bidef[td] < 0) {
04733             bicol[td] = - col;
04734             (*next)++;
04735             ndart++;
04736             mconn->addArtic(nd, 1);
04737             mblk->nartps++;
04738             nart2 = 1;
04739             momset1 = MASK(td);
04740             mopi->nlegs++;
04741             mopi->next++;
04742             mconn->addCEdge(td, nd, momset1);
04743             *momset |= momset1;
04744             if (newv) {
04745                 mconn->pushNode(td);
04746             }
04747
04748             // self-loop : pd --> nd --> nd
04749         } else if (td == nd) {
04750             lp = conn/2;
04751             mopi->loop += lp;
04752             mopi->nedges += lp;
04753             ndart += lp;
04754             bipart = False;
04755             mconn->addArtic(nd, lp);
04756             mconn->addBlockSelf(nd, lp);
04757             mblk->nartps++;
04758             nart2 = 1;
04759             for (l = 0; l < lp; l++) {
04760                 int m = nExtern + mconn->nbacked;
04761                 mconn->nbacked++;
04762                 momset1 = MASK(m);
04763                 mconn->addCEdge(td, nd, momset1);
04764             }
04765
04766             // back to the parent : pd --> nd --> pd, pd is a vertex
04767         } else if (td == pd) {
04768             if (ned > 1) {
04769                 bilow[nd] = Min(bilow[nd], bidef[pd]);
04770                 mopi->loop += ned - 1;

```

```

04771         mblk->loop += ned - 1;
04772     } else {
04773         // cancel this visit
04774         nvisit--;
04775     }
04776
04777     // td is already visited
04778 } else if (bidef[td] >= 0) {
04779     bipart &= (bicol[td] == - col);
04780     bilow[nd] = Min(bilow[nd], bidef[td]);
04781     if (bidef[nd] >= bidef[td]) {
04782         // new back-edge is found
04783         mopi->loop += conn;
04784         mopi->nedges += conn;
04785         mblk->loop += conn;
04786         mconn->pushEdge(td, nd);
04787         for (l = 0; l < conn; l++) {
04788             int m = nExtern + mconn->nbacked;
04789             mconn->nbacked++;
04790             momset1 = MASK(m);
04791             *momset |= momset1;
04792             mconn->addCEdge(td, nd, momset1);
04793         }
04794     } else {
04795         // reverse direction of back-edge
04796         int cn = 0;
04797
04798         for (int ed = 0; ed < mconn->sedges; ed++) {
04799             if (mconn->cedges[ed].nodes[0] == nd &&
04800                 mconn->cedges[ed].nodes[1] == td &&
04801                 mconn->cedges[ed].momdir > 0) {
04802                 cn++;
04803                 *momset &= ~ (mconn->cedges[ed].momset);
04804             } else if (mconn->cedges[ed].nodes[1] == nd &&
04805                 mconn->cedges[ed].nodes[0] == td &&
04806                 mconn->cedges[ed].momdir < 0) {
04807                 cn++;
04808                 *momset &= ~ (mconn->cedges[ed].momset);
04809             }
04810         }
04811         if (cn != conn) {
04812             printf("*** revisit back-ed (%d --> %d) cn=%d != conn=%d\n",
04813                 nd, td, cn, conn);
04814             printf("    sedges = %d\n", mconn->sedges);
04815             for (int ed = 0; ed < mconn->sedges; ed++) {
04816                 printf("        %d : (%d --> %d) : [%2d*%2ld]\n", ed,
04817                     mconn->cedges[ed].nodes[0],
04818                     mconn->cedges[ed].nodes[1],
04819                     mconn->cedges[ed].momdir,
04820                     mconn->cedges[ed].momset);
04821             }
04822             print();
04823             egraph->print();
04824             mconn->print();
04825             erEnd("bisearchME: illegal connection");
04826         }
04827     }
04828
04829     // new node
04830 } else if (bidef[td] < 0) {
04831
04832     // stack pointer
04833     if (pd < 0 && isExternal(nd)) {
04834         opit = opit0;
04835     } else {
04836         opit = mconn->opistkptr;
04837     }
04838     blkt = mconn->blkstkptr;
04839     mblk1.init();
04840
04841     mconn->pushEdge(nd, td);
04842
04843     // visit child
04844     bisearchME(td, nd, adjMat[td][nd], - col,
04845         &mopil, &mblk1, &momset1, &next1, &nart1);
04846
04847     // momset
04848     momset2 = 0;
04849     for (l = 0; l < conn - 1; l++) {
04850         int m = nExtern + mconn->nbacked;
04851         mconn->nbacked++;
04852         momset3 = MASK(m);
04853         mconn->addCEdge(nd, td, momset3);
04854         momset2 |= momset3;
04855     }
04856     mconn->addCEdge(td, nd, momset1 | momset2);
04857     *momset |= momset1;

```

```

04858         // articulation point of bridge
04859         if (bilow[td] > bidef[nd]) {
04860
04861             // new OPI component (not including 'td')
04862             int mom0lg = (momset1 == 0) ? 1 : 0;
04863             mopil.nlegs++;
04864             mopil.mom0lg += mom0lg;
04865
04866             mconn->addOPIC(&mopil, opit);
04867
04868             mopil.init();
04869             mopil.nlegs = 1;
04870             mopil.mom0lg = mom0lg;
04871             if (pd >= 0 || !isExternal(nd)) {
04872                 // opi
04873                 mconn->addBridge(nd, td, next1, nExtern);
04874
04875                 // block
04876                 ndart++;
04877                 mconn->addArtic(nd, 1);
04878                 // discard nparts from nodes below td
04879                 mblk1.nartps = 2;
04880                 mconn->addBlock(&mblk1, blkt);
04881                 mblk1.init();
04882                 mblk1.nartps = 1;
04883
04884                 nart1 = 0;
04885                 nart2 = 1; // nd is an articulation point
04886             }
04887         } else if (bilow[td] == bidef[nd]) {
04888             // articulation point of a block
04889             mopil.nedges += conn;
04890             if (pd >= 0 || !isExternal(nd)) {
04891                 ndart++;
04892                 mconn->addArtic(nd, 1);
04893                 mblk1.nartps++;
04894                 mconn->addBlock(&mblk1, blkt);
04895                 mblk1.init();
04896                 mblk1.nartps = 1;
04897                 nart1 = 0;
04898                 nart2 = 1; // nd is an articulation point
04899             }
04900         } else {
04901             // inside a block
04902             mopil.nedges += conn;
04903         }
04904     }
04905
04906     bilow[nd] = Min(bilow[nd], bilow[td]);
04907     mopi->nlegs += mopil.nlegs;
04908     mopi->next += mopil.next;
04909     mopi->loop += mopil.loop;
04910     mopi->nedges += mopil.nedges;
04911     mopi->ctloop += mopil.ctloop;
04912     mopi->mom0lg += mopil.mom0lg;
04913
04914     mblk->nartps += mblk1.nartps;
04915     mblk->loop += mblk1.loop;
04916
04917     *next += next1;
04918     *nart += nart1;
04919 } // of "if (bidef[td] < 0)"
04920 } // end of for
04921
04922 // no connection except for 'pd'==>'nd'. Then 'nd' is an art. point
04923 if (nvisit == 0) {
04924     nart2 = 1;
04925 }
04926 *nart += nart2;
04927
04928 // add # loop inside counter terms
04929 if (newv) {
04930     if (pd >= 0) {
04931         mconn->pushNode(nd);
04932     }
04933     mopi->ctloop += Max(0, nodes[nd]->extloop);
04934 }
04935
04936 // 'nd' is the root node
04937 if (pd < 0) {
04938     if (isExternal(nd)) {
04939         if (td0 >= 0) {
04940             mconn->addArtic(td0, 1);
04941         }
04942         if (mconn->nopic > 0) {
04943             (mconn->opics[mconn->nopic-1].next)++;
04944         }
04945     }

```

```

04945     } else {
04946         mconn->addOPic(mopi, opit0);
04947         if (ndart == 1) {
04948             // 'nd' has only 1 child
04949             // the root is not really an art. point
04950             (*nart)--;
04951             mconn->addArtic(nd, -1);
04952             (mconn->blocks[mconn->nblocks-1].nartps)--;
04953         }
04954     }
04955 }
04956 }
04957
04958 //-----
04959 BigInt MGraph::generate(void)
04960 {
04961     // Generate graphs
04962     // the generation process starts from 'connectClass'.
04963
04964     MNodeClass *cl;
04965
04966     // Initial classification of nodes.
04967     cl = new MNodeClass(nNodes, nClasses);
04968     cl->init(clist, maxdeg, adjMat);
04969     cl->reorder(this);
04970     connectClass(cl);
04971
04972     delete cl;
04973
04974     return cDiag;
04975 }
04976
04977 //-----
04978 void MGraph::connectClass(MNodeClass *cl)
04979 {
04980     // Connect nodes in a class to others
04981
04982     int sc, sn;
04983     MNodeClass *xcl;
04984
04985     xcl = refineClass(cl);
04986
04987     if (xcl == NULL) {
04988 #ifdef MONITOR
04989         discardRefine++;
04990 #endif
04991     } else {
04992         if (xcl->flg0 >= xcl->nClasses) {
04993             newGraph(xcl);
04994         } else {
04995             sc = xcl->clord[xcl->flg0];
04996             sn = xcl->flist[sc];
04997             connectNode(xcl->flg0, sn, xcl);
04998         }
04999     }
05000     if (xcl != cl && xcl != NULL) {
05001         delete xcl;
05002     }
05003 }
05004
05005 //-----
05006 void MGraph::connectNode(int so, int ss, MNodeClass *cl)
05007 {
05008     int sc, sn;
05009
05010     sc = cl->clord[so];
05011     if (ss >= cl->flist[sc+1]) {
05012         connectClass(cl);
05013         return;
05014     }
05015
05016     for (sn = ss; sn < cl->flist[sc+1]; sn++) {
05017         connectLeg(so, sn, so, sn, cl);
05018         return;
05019     }
05020 }
05021
05022 //-----
05023 void MGraph::connectLeg(int so, int sn, int to, int ts, MNodeClass *cl)
05024 {
05025     // Add one connection between two legs.
05026     // 1. select another node to connect
05027     // 2. determine multiplicity of the connection
05028
05029     int sc, tc, tn, maxself, nc2, nc, maxcon, ts1, ncm, tol;
05030
05031     sc = cl->clord[so];

```

```

05032
05033 #ifdef CHECK
05034     if (sn >= cl->flist[sc+1]) {
05035         erEnd("connectLeg : illegal control");
05036         return;
05037     }
05038 #endif
05039
05040 // There remains no free legs in the node 'sn' : move to next node.
05041 if (nodes[sn]->freelg < 1) {
05042
05043     if (!isConnected()) {
05044 #ifdef MONITOR
05045         discardDisc++;
05046 #endif
05047     } else {
05048         // next node in the current class.
05049         connectNode(so, sn+1, cl);
05050     }
05051     return;
05052 }
05053
05054 // connect a free leg of the current node 'sn'.
05055 for (tol = to; tol < cl->nClasses; tol++) {
05056     tc = cl->clord[tol];
05057     if (tol == to) {
05058         ts1 = ts;
05059     } else {
05060         ts1 = cl->flist[tc];
05061     }
05062 #ifdef MINMAXLEG
05063     if (ts1 >= nNodes) {
05064         continue;
05065     }
05066     if ((nodes[sn]->cmindeg > 0 && nodes[ts1]->deg < nodes[sn]->cmindeg)
05067         || (nodes[sn]->cmaxdeg > 0 && nodes[ts1]->deg > nodes[sn]->cmaxdeg)
05068         || (nodes[ts1]->cmindeg > 0 && nodes[sn]->deg < nodes[ts1]->cmindeg)
05069         || (nodes[ts1]->cmaxdeg > 0 && nodes[sn]->deg > nodes[ts1]->cmaxdeg)) {
05070         continue;
05071     }
05072 #endif
05073     for (tn = ts1; tn < cl->flist[tc+1]; tn++) {
05074         if (sc == tc && sn > tn) {
05075             continue;
05076         }
05077         if (nodes[tn]->freelg < 1) {
05078             continue;
05079         }
05080         // self-loop
05081     } else if (sn == tn) {
05082         if (opt->values[GRCC_OPT_NoSelfLoop] > 0) {
05083             continue;
05084         }
05085         if (nNodes > 1) {
05086             // there are two or more nodes in the graph :
05087             // avoid disconnected graph
05088             maxself = Min((nodes[sn]->freelg)/2, (nodes[sn]->deg-1)/2);
05089         } else {
05090             // there is only one node the graph.
05091             maxself = nodes[sn]->freelg/2;
05092         }
05093     }
05094     if ((nExtern > 1) && (opt->values[GRCC_OPT_1PI] > 0
05095         || opt->values[GRCC_OPT_NoTadpole] > 0)
05096         && nNodes > 1) {
05097         // there are two or more nodes in the graph :
05098         // avoid to generate tadpole
05099         maxself = Min((nodes[sn]->deg-2)/2, maxself);
05100     }
05101
05102     // for the number of connection.
05103     for (nc2 = maxself; nc2 > 0; nc2--) {
05104         nc = 2*nc2;
05105         ncm = CLWIGHTD(nc);
05106         adjMat[sn][sn] = nc;
05107         nodes[sn]->freelg -= nc;
05108         cl->incMat(sn, tn, ncm);
05109
05110         // next connection
05111         connectLeg(so, sn, tol, tn+1, cl);
05112
05113         // restore the configuration
05114         cl->incMat(tn, sn, -ncm);
05115         adjMat[sn][sn] = 0;
05116         nodes[sn]->freelg += nc;
05117     }
05118 }

```

```

05119         // connections between different nodes.
05120     } else {
05121         // maximum possible connection number
05122         maxcon = Min(nodes[sn]->freelg, nodes[tn]->freelg);
05123
05124         // avoid disconnected graphs.
05125         if (nNodes > 2 && nodes[sn]->deg == nodes[tn]->deg) {
05126             maxcon = Min(maxcon, nodes[sn]->deg-1);
05127         }
05128
05129         if (opt->values[GRCC_OPT_NoMultiEdge] > 0) {
05130             maxcon = Min(maxcon, 1);
05131         }
05132
05133 #ifdef CHECK
05134         if ((adjMat[sn][tn] != 0) ||
05135             (adjMat[sn][tn] != adjMat[tn][sn])) {
05136             printf("*** inconsistent connection: sn=%d, tn=%d",
05137                 sn, tn);
05138             printAdjMat(cl);
05139             erEnd("inconsistent connection ");
05140         }
05141 #endif
05142
05143         // vary number of connections
05144         for (nc = maxcon; nc > 0; nc--) {
05145             ncm = CLWIGHTO(nc);
05146             adjMat[sn][tn] = nc;
05147             adjMat[tn][sn] = nc;
05148             nodes[sn]->freelg -= nc;
05149             nodes[tn]->freelg -= nc;
05150             cl->incMat(sn, tn, ncm);
05151             cl->incMat(tn, sn, ncm);
05152
05153             // next connection
05154             connectLeg(so, sn, tol, tn+1, cl);
05155
05156             // restore configuration
05157             cl->incMat(sn, tn, -ncm);
05158             cl->incMat(tn, sn, -ncm);
05159             adjMat[sn][tn] = 0;
05160             adjMat[tn][sn] = 0;
05161             nodes[sn]->freelg += nc;
05162             nodes[tn]->freelg += nc;
05163         }
05164     }
05165 }
05166 }
05167 }
05168
05169 //-----
05170 Bool MGraph::isOptM(void)
05171 {
05172     Bool ok = True;
05173
05174     opi      = (mconn->nopic == 1);
05175     opiloop  = (mconn->nlpopic <= 1);
05176     tadpole  = (mconn->ne0bridges >= ((nExtern == 1) ? 0 : 1));
05177     selfloop = (mconn->nselfloops > 0);
05178     multiedge = (mconn->nmultiedges > 0);
05179     tadbloc  = (mconn->nalblocks > 0);
05180     block    = (mconn->neblocks <= 1);
05181     extself  = (mconn->nelbridges > 0);
05182
05183     if (opt->values[GRCC_OPT_1PI] > 0) {
05184         ok = ok && opi;
05185     } else if (opt->values[GRCC_OPT_1PI] < 0) {
05186         ok = ok && !opi;
05187     }
05188     if (opt->values[GRCC_OPT_NoExtSelf] > 0) {
05189         ok = ok && !extself;
05190     } else if (opt->values[GRCC_OPT_NoExtSelf] < 0) {
05191         ok = ok && extself;
05192     }
05193     if (opt->values[GRCC_OPT_NoTadpole] > 0) {
05194 #ifdef OLDOPT
05195         ok = ok && !tadpole;
05196 #else
05197         if (nExtern > 1) {
05198             ok = ok && !tadpole;
05199         }
05200 #endif
05201     } else if (opt->values[GRCC_OPT_NoTadpole] < 0) {
05202 #ifdef OLDOPT
05203         ok = ok && !tadpole;
05204 #else
05205         if (nExtern > 1) {

```

```

05206         ok = ok && tadpole;
05207     }
05208 #endif
05209 }
05210 if (opt->values[GRCC_OPT_NoSelfLoop] > 0) {
05211 } else if (opt->values[GRCC_OPT_NoSelfLoop] < 0) {
05212     ok = ok && selfloop;
05213 }
05214 if (opt->values[GRCC_OPT_NoMultiEdge] > 0) {
05215 } else if (opt->values[GRCC_OPT_NoMultiEdge] < 0) {
05216     ok = ok && multiedge;
05217 }
05218 if (opt->values[GRCC_OPT_No1PtBlock] > 0) {
05219     if (nExtern > 1) {
05220         ok = ok && !tadblock;
05221     }
05222 } else if (opt->values[GRCC_OPT_No1PtBlock] < 0) {
05223     if (nExtern > 1) {
05224         ok = ok && tadblock;
05225     }
05226 }
05227 if (opt->values[GRCC_OPT_Block] > 0) {
05228     ok = ok && block;
05229 } else if (opt->values[GRCC_OPT_Block] < 0) {
05230     ok = ok && !block;
05231 }
05232 return ok;
05233 }
05234
05235 //-----
05236 void MGraph::newGraph(MNodeClass *cl)
05237 {
05238     // A new candidate diagram is obtained.
05239     // It may be a disconnected graph
05240     //
05241     // Things to be done in the steps followed by this function.
05242     // 1. convert data format which treat the edges as objects.
05243     // 2. definition of loop momenta to the edges.
05244     // 3. analysis of loop structure in a graph.
05245     // 4. assignment of particles to edges and vertices to nodes
05246     // 5. recalculate symmetry factor
05247
05248     int connected;
05249     MNodeClass *xcl;
05250     Bool ok;
05251
05252     ngen++;
05253
05254     // refine class and check ordering condition
05255     xcl = refineClass(cl);
05256     if (xcl == NULL) {
05257 #ifdef MONITOR
05258         discardRefine++;
05259 #endif
05260
05261     // check whether this is a connected graph or not.
05262     } else {
05263         connected = isConnected();
05264         if (!connected) {
05265 #ifdef MONITOR
05266             discardDisc++;
05267 #endif
05268
05269         // connected graph : check isomorphism of the graph
05270     } else {
05271         ngconn++;
05272         if (!isIsomorphic(xcl)) {
05273 #ifdef MONITOR
05274             discardIso++;
05275 #endif
05276
05277         // We got a new connected and a unique representation of a class.
05278     } else {
05279         biconnME();
05280         if (isOptM()) {
05281             egraph->fromMGraph(this);
05282             if (egraph->isOptE()) {
05283                 curcl->copy(xcl);
05284 #ifdef ORBITS
05285                 orbits->toOrbits();
05286 #endif
05287             ok = True;
05288             if (opt->outmg != NULL) {
05289                 if (opt->proc != NULL) {
05290                     egraph->mId = opt->proc->mgrcount + 1;
05291                     egraph->sId = opt->proc->agrcount + 1;
05292                 } else if (opt->sproc != NULL) {

```



```

05293         egraph->mId = opt->sproc->mgrcount + 1;
05294         egraph->sId = opt->sproc->agrcount + 1;
05295     } else {
05296         egraph->mId = cDiag;
05297     }
05298     ok = (* (opt->outmg)) (egraph, opt->argmg);
05299 }
05300
05301 if (ok) {
05302     // # generated graphs
05303     cDiag++;
05304     wscon.add(1, nsym*esym);
05305
05306     // # generated lPI graphs
05307     if (opi) {
05308         wsopi.add(1, nsym*esym);
05309         c1PI++;
05310     }
05311
05312     // # no tadpoles
05313     if (!tadpole) {
05314         cNoTadpole++;
05315     }
05316     // # no tadblocks
05317     if (!tadblock) {
05318         cNoTadBlock++;
05319         if (opi) {
05320             c1PINoTadBlock++;
05321         }
05322     }
05323
05324 #ifdef MONITOR
05325     printf("\n");
05326     printf("Graph : %ld (%ld)", cDiag, ngen);
05327     printf(" sym. factor = (%ld*%ld)\n", nsym, esym);
05328     printAdjMat(c1);
05329     // c1->printMat();
05330 #endif ORBITS
05331
05332     orbits->print();
05333 #endif
05334     // go to next step
05335     opt->newMGraph(this);
05336 } else {
05337 }
05338 } else {
05339 }
05340 } else {
05341 ;
05342 }
05343 }
05344 }
05345 }
05346 if (xcl != c1 && xcl != NULL) {
05347     delete xcl;
05348 }
05349 }
05350
05351 //=====
05352 // class MORbits: orbits of nodes
05353 //-----
05354 MORbits::MORbits(void)
05355 {
05356     nOrbits = 0;
05357     nNodes = 0;
05358 }
05359
05360 //-----
05361 MORbits::~MORbits(void)
05362 {
05363 }
05364
05365 //-----
05366 void MORbits::print(void)
05367 {
05368     int c;
05369
05370     printf("Orbits : nOrbits=%d: nd2or=", nOrbits);
05371     prIntArray(nNodes, nd2or, "\n");
05372     for (c = 0; c < nOrbits; c++) {
05373         printf(" %2d: (%2d -- %2d) :", c, flist[c], flist[c+1]-1);
05374         prIntArray(flist[c+1]-flist[c], or2nd+flist[c], "\n");
05375     }
05376 }
05377
05378 //-----
05379 void MORbits::initPerm(int nnodes)

```

```

05380 {
05381     int j;
05382
05383     nNodes = nnodes;
05384     for (j = 0; j < nNodes; j++) {
05385         nd2or[j] = j;
05386     }
05387 }
05388
05389 //-----
05390 void MORbits::fromPerm(int *perm)
05391 {
05392     // update the orbits of nodes by the permutation
05393
05394     int j, j1, k, l;
05395
05396     for (j = 0; j < nNodes; j++) {
05397         if (nd2or[j] != j) {
05398             // not the first element of an old orbit
05399             continue;
05400         }
05401         // merge orbits to orbit 'j'
05402         k = j;
05403         for (j1 = 0; j1 < nNodes && (k = perm[k]) != j; j1++) {
05404             if (nd2or[k] == j) {
05405                 // 'k' is already in 'j'
05406                 ;
05407             } else {
05408                 // old orbit 'k' had several elements: merge to orbit 'j'
05409                 for (l = 0; l < nNodes; l++) {
05410                     if (nd2or[l] == k) {
05411                         nd2or[l] = j;
05412                     }
05413                 }
05414             }
05415         }
05416 #ifndef CHECK
05417         if (j1 >= nNodes) {
05418             printf("*** fromPerm: illegal control: j=%d, k=%d\n", j, k);
05419             printf("perm=");
05420             prIntArray(nNodes, perm, " nd2or=");
05421             prIntArray(nNodes, nd2or, "\n");
05422             erEnd("fromPerm: illegal control");
05423         }
05424 #endif
05425     }
05426 }
05427
05428 //-----
05429 void MORbits::toOrbits(void)
05430 {
05431     // fill elements from 'nd2or'
05432     int nd, nel, k, lor;
05433
05434     lor = -1;
05435     nel = 0;
05436     nOrbits = 0;
05437     for (nd = 0; nd < nNodes; nd++) {
05438         if (nd2or[nd] > lor) {
05439             // lowest element of a new orbit
05440             lor = nd2or[nd];
05441             flist[nOrbits++] = nel;
05442             for (k = nd; k < nNodes; k++) {
05443                 if (nd2or[k] == lor) {
05444                     or2nd[nel++] = k;
05445                 }
05446             }
05447         }
05448     }
05449     flist[nOrbits] = nNodes;
05450 }
05451
05452 //*****
05453 // n-edge connected components
05454 //=====
05455 // class MCEdge
05456 //-----
05457 MCEdge::MCEdge(void)
05458 {
05459     ;
05460 }
05461
05462 //-----
05463 MCEdge::~MCEdge(void)
05464 {
05465     ;
05466 }

```

```

05467
05468 //=====
05469 // class MCOpi: one n-edge connected component
05470 //-----
05471 MCOpi::MCOpi(void)
05472 {
05473     init();
05474 }
05475
05476 //-----
05477 MCOpi::~MCOpi(void)
05478 {
05479     nodes = NULL;
05480 }
05481
05482 //-----
05483 void MCOpi::init(void)
05484 {
05485     nodes = NULL;
05486     nnodes = 0;
05487     nlegs = 0;
05488     next = 0;
05489     nedges = 0;
05490     loop = 0;
05491     ctloop = 0;
05492     mom0lg = 0;
05493 }
05494
05495 //=====
05496 // class MCBridge
05497 //-----
05498 MCBridge::MCBridge(void)
05499 {
05500 }
05501
05502 //-----
05503 MCBridge::~MCBridge(void)
05504 {
05505 }
05506
05507 //=====
05508 // class MCBlock
05509 //-----
05510 MCBlock::MCBlock(void)
05511 {
05512     init();
05513 }
05514
05515 //-----
05516 MCBlock::~MCBlock(void)
05517 {
05518 }
05519
05520 //-----
05521 void MCBlock::init(void)
05522 {
05523     edges = NULL;
05524     nmedges = 0;
05525     nartps = 0;
05526     loop = 0;
05527 }
05528
05529 //=====
05530 // class MConn: table of n-edge connected components
05531 //-----
05532 MConn::MConn(int nnod, int nedg)
05533 {
05534     // nnod : the number of nodes
05535     // nedg : the number of edges
05536
05537     snodes = nnod;
05538     sedges = nedg;
05539
05540     cedges = new MCEdge[sedges];
05541     opics = new MCOpi[snodes];
05542     bridges = new MCBridge[sedges];
05543     blocks = new MCBlock[sedges];
05544     articuls = new int[snodes];
05545
05546     // workspace
05547     opisp = new int[snodes];
05548     opistk = new int[snodes];
05549     blksp = new Edge2n[sedges];
05550     blkstk = new Edge2n[sedges];
05551     init();
05552 }
05553

```

```

05554 //-----
05555 MConn::~MConn(void)
05556 {
05557     delete[] blkstk;
05558     delete[] blksp;
05559     delete[] opistk;
05560     delete[] opisp;
05561
05562     delete[] articuls;
05563     delete[] blocks;
05564     delete[] bridges;
05565     delete[] opics;
05566     delete[] cedges;
05567 }
05568
05569 //-----
05570 void MConn::init(void)
05571 {
05572     int j;
05573
05574     nopic          = 0;
05575     nlpopic        = 0;
05576     nbacked        = 0;
05577     nctopic        = 0;
05578     nbridges       = 0;
05579     ne0bridges     = 0;
05580     nelbridges     = 0;
05581     nselfloops     = 0;
05582     nmultiedges    = 0;
05583     nbacked        = 0;
05584
05585     nblocks        = 0;
05586     nalblocks      = 0;
05587     narticuls      = 0;
05588     neblocks       = 0;
05589
05590     opistkptra     = 0;
05591     nopisp         = 0;
05592     blkstkptr      = 0;
05593     nblksp         = 0;
05594
05595     for (j = 0; j < snodes; j++) {
05596         articuls[j] = 0;
05597     }
05598 }
05599
05600 //-----
05601 void MConn::pushNode(int nd)
05602 {
05603     if (opistkptra >= snodes) {
05604         erEnd("MConn::pushNode: opistkptra >= snodes");
05605     }
05606     opistk[opistkptra++] = nd;
05607 }
05608
05609 //-----
05610 void MConn::pushEdge(int n0, int n1)
05611 {
05612     if (blkstkptr >= sedges) {
05613         erEnd("MConn::pushEdge: blkstkptr >= sedges");
05614     }
05615     if (n0 <= n1) {
05616         blkstk[blkstkptr][0] = n0;
05617         blkstk[blkstkptr][1] = n1;
05618     } else {
05619         blkstk[blkstkptr][0] = n1;
05620         blkstk[blkstkptr][1] = n0;
05621     }
05622     blkstkptr++;
05623 }
05624
05625 //-----
05626 void MConn::initCEdges(MGraph *mg)
05627 {
05628     int ed, n0, n1, e;
05629
05630     ed = 0;
05631     for (n0 = 0; n0 < mg->nNodes; n0++) {
05632         for (e = 0; e < mg->adjMat[n0][n0]/2; e++, ed++) {
05633             cedges[ed].nodes[0] = n0;
05634             cedges[ed].nodes[1] = n0;
05635             cedges[ed].momdir   = 0;
05636         }
05637         for (n1 = n0+1; n1 < mg->nNodes; n1++) {
05638             for (e = 0; e < mg->adjMat[n0][n1]; e++, ed++) {
05639                 cedges[ed].nodes[0] = n0;

```

```

05641         cedges[ed].nodes[1] = n1;
05642         cedges[ed].momdir    = 0;
05643     }
05644 }
05645 }
05646 if (ed != sedges) {
05647     printf("*** ed=%d != sedges=%d\n", ed, sedges);
05648     erEnd("MConn::initCEdge: table overflow");
05649 }
05650 }
05651
05652 //-----
05653 void MConn::addCEdge(int n0, int n1, ULong momset)
05654 {
05655     int m0, m1, dir, ed;
05656
05657     if (n0 <= n1) {
05658         m0 = n0;
05659         m1 = n1;
05660         dir = 1;
05661     } else {
05662         m0 = n1;
05663         m1 = n0;
05664         dir = -1;
05665     }
05666     for (ed = 0; ed < sedges; ed++) {
05667         if (cedges[ed].nodes[0] == m0 && cedges[ed].nodes[1] == m1 &&
05668             cedges[ed].momdir == 0) {
05669             cedges[ed].momdir = dir;
05670             cedges[ed].momset = momset;
05671             return;
05672         }
05673     }
05674 }
05675
05676 //-----
05677 void MConn::addOPic(MCOpi *mopi, int stp)
05678 {
05679     int j, nn;
05680
05681     if (nopic >= snodes) {
05682         erEnd("MConn::addOPic: table overflow");
05683     }
05684
05685     nn = opistkptr - stp;
05686     for (j = 0; j < nn; j++) {
05687         opisp[nopisp+j] = opistk[stp+j];
05688     }
05689     opics[nopic].nnodes = nn;
05690     opics[nopic].nlegs  = mopi->nlegs;
05691     opics[nopic].nedges = mopi->nedges;
05692     opics[nopic].next   = mopi->next;
05693     opics[nopic].loop   = mopi->loop;
05694     opics[nopic].ctloop = mopi->ctloop;
05695     opics[nopic].mom0lg = mopi->mom0lg;
05696     opics[nopic].nodes  = opisp + nopisp;
05697     nopisp += nn;
05698     opistkptr = stp;
05699
05700     nopic++;
05701 }
05702
05703 //-----
05704 void MConn::addBridge(int n0, int n1, int nex, int nextot)
05705 {
05706     if (nbridges >= sedges) {
05707         erEnd("MConn::addBridge: table overflow");
05708     }
05709     if (n0 <= n1) {
05710         bridges[nbridges].nodes[0] = n0;
05711         bridges[nbridges].nodes[1] = n1;
05712     } else {
05713         bridges[nbridges].nodes[0] = n1;
05714         bridges[nbridges].nodes[1] = n0;
05715     }
05716     bridges[nbridges].next = Min(nex, nextot-nex);
05717     nbridges++;
05718 }
05719
05720 //-----
05721 void MConn::addArtic(int nd, int mul)
05722 {
05723     articuls[nd] += mul;
05724     if (articuls[nd] == mul) {
05725         narticuls++;
05726     } else if (articuls[nd] == 0) {
05727         narticuls--;

```

```

05728     }
05729 }
05730
05731 //-----
05732 void MConn::addBlock(MCBlock *mblk, int stp)
05733 {
05734     int j, nn;
05735
05736     if (nopic >= snodes) {
05737         erEnd("MConn::addOPic: table overflow");
05738     }
05739
05740     nn = blkstkptr - stp;
05741     for (j = 0; j < nn; j++) {
05742         blksp[nblksp+j][0] = blkstk[stp+j][0];
05743         blksp[nblksp+j][1] = blkstk[stp+j][1];
05744     }
05745     blocks[nblocks].edges = blksp + nblksp;
05746     blocks[nblocks].nmedges = nn;
05747     blocks[nblocks].nartps = mblk->nartps;
05748     blocks[nblocks].loop = mblk->loop;
05749     nblksp += nn;
05750     blkstkptr = stp;
05751
05752     nblocks++;
05753 }
05754
05755 //-----
05756 void MConn::addBlockSelf(int nd, int mult)
05757 {
05758     MCBlock mblk;
05759     int j, stp;
05760
05761     mblk.edges = NULL;
05762     mblk.nmedges = 0;
05763     mblk.nartps = 1;
05764     mblk.loop = 1;
05765
05766     for (j = 0; j < mult; j++) {
05767         stp = blkstkptr;
05768         pushEdge(nd, nd);
05769         addBlock(&mblk, stp);
05770     }
05771 }
05772
05773 //-----
05774 void MConn::print(void)
05775 {
05776     int j, k;
05777
05778     printf("+++ MConn object: snodes=%d, sedges=%d\n", snodes, sedges);
05779     printf("    nopic=%d, nlpopic=%d, nbacked=%d, nctopic=%d, "
05780            "nbridges=%d, ne0bridges=%d, nelbridges=%d\n",
05781            nopic, nlpopic, nbacked, nctopic,
05782            nbridges, ne0bridges, nelbridges);
05783     printf("    nblocks=%d, neblocks=%d, nalblocks=%d, narticuls=%d, nselfloop=%d\n",
05784            nblocks, neblocks, nalblocks, narticuls, nselfloops);
05785     printf("    nmultiedges=%d\n", nmultiedges);
05786
05787     printf("    cEdges (%d)\n", sedges);
05788     if (sedges > 0) {
05789         for (j = 0; j < sedges; j++) {
05790             printf("        %2d: (%d,%d)[%2d*%2ld] \n", j,
05791                    cedges[j].nodes[0], cedges[j].nodes[1],
05792                    cedges[j].momdir, cedges[j].momset);
05793         }
05794     }
05795     printf("\n");
05796
05797     printf("    lPI components (%d)\n", nopic);
05798     for (j = 0; j < nopic; j++) {
05799         printf("        %d: nleg=%d, nnodes=%d, nedge=%d, ",
05800                j, opics[j].nlegs, opics[j].nnodes, opics[j].nedges);
05801         printf("next=%d, loop=%d, ctlp=%d: m0lg=%d [",
05802                opics[j].next, opics[j].loop, opics[j].ctloop,
05803                opics[j].mom0lg);
05804         for (k = 0; k < opics[j].nnodes; k++) {
05805             printf(" %d", opics[j].nodes[k]);
05806         }
05807         printf("]\n");
05808     }
05809
05810     printf("    bridges (%d)\n", nbridges);
05811     if (nbridges > 0) {
05812         printf("        ");
05813         for (j = 0; j < nbridges; j++) {
05814             printf("(%d,%d) [mom=%d] ",

```

```

05815         bridges[j].nodes[0], bridges[j].nodes[1], bridges[j].next);
05816     }
05817     printf("\n");
05818 }
05819
05820 printf("  blocks (%d)\n", nblocks);
05821 for (j = 0; j < nblocks; j++) {
05822     printf("      %d: nmedges=%d, nartps=%d, loop=%d: [",
05823         j, blocks[j].nmedges, blocks[j].nartps, blocks[j].loop);
05824     for (k = 0; k < blocks[j].nmedges; k++) {
05825         printf(" (%d,%d)", blocks[j].edges[k][0], blocks[j].edges[k][1]);
05826     }
05827     printf("]\n");
05828 }
05829
05830 printf("  articulation points (%d)\n", narticuls);
05831 if (narticuls > 0) {
05832     printf("      ");
05833     for (j = 0; j < snodes; j++) {
05834         if (articuls[j] != 0) {
05835             #if 0
05836                 printf("%d(%d) ", j, articuls[j]);
05837             #else
05838                 printf("%d ", j);
05839             #endif
05840         }
05841     }
05842     printf("\n");
05843 }
05844 }
05845
05846 //-----
05847 void MConn::prEdges(void)
05848 {
05849     int j;
05850
05851     printf("  cEdges (%d)", sedges);
05852     if (sedges > 0) {
05853         for (j = 0; j < sedges; j++) {
05854             if (j % 5 == 0) {
05855                 printf("\n      ");
05856             }
05857             printf("(%d,%d) [%2d*%3ld] ",
05858                 cedges[j].nodes[0], cedges[j].nodes[1],
05859                 cedges[j].momdir, cedges[j].momset);
05860         }
05861         printf("\n");
05862     }
05863 }
05864
05865 //*****
05866 // sgroup.cc
05867 //=====
05868 // compile options
05869 //=====
05870 // table of group elements
05871 //-----
05872 SGroup::SGroup(void)
05873 {
05874     // should be called before graph generation
05875     nnodes = -1;
05876     nelem = 0;
05877     elem = NULL;
05878 }
05879
05880 //-----
05881 SGroup::~SGroup(void)
05882 {
05883     int j;
05884
05885     if (elem != NULL) {
05886         for (j = GRCC_MAXGROUP-1; j >= 0; j--) {
05887             if (elem[j] != NULL) {
05888                 delete[] elem[j];
05889                 elem[j] = NULL;
05890             }
05891         }
05892         delete[] elem;
05893         elem = NULL;
05894     }
05895 }
05896
05897 //-----
05898 void SGroup::print(void)
05899 {
05900     int j;
05901 }

```

```

05902     printf("SGroup : nnodes = %d, nelem=%ld, cgen=%d, csav=%d\n",
05903           nnodes, nelem, cgen, csav);
05904     printf("  eclass =");
05905     prIntArray(necclass, eclass, "\n");
05906     for (j = 0; j < nelem; j++) {
05907         printf("    %4d: ", j);
05908         prIntArray(nnodes, elem[j], "\n");
05909     }
05910 }
05911
05912 //-----
05913 void SGroup::newGroup(int nnd, int nclss, int *clss)
05914 {
05915     int j;
05916
05917     clearGroup();
05918     nnodes = nnd;
05919     necclass = nclss;
05920
05921     if (necclass > GRCC_MAXNODES) {
05922         erEnd("newGroup : too many classes (GRCC_MAXNODES)");
05923     }
05924     for (j = 0; j < necclass; j++) {
05925         eclass[j] = clss[j];
05926     }
05927
05928     nelem = 0;
05929     if (elem == NULL) {
05930         elem = new int*[GRCC_MAXGROUP];
05931         for (j = 0; j < GRCC_MAXGROUP; j++) {
05932             elem[j] = NULL;
05933         }
05934     }
05935 }
05936
05937 //-----
05938 void SGroup::clearGroup(void)
05939 {
05940     nelem = 0;
05941     csav = -1;
05942     cgen = -1;
05943 }
05944
05945 //-----
05946 void SGroup::delGroup(void)
05947 {
05948     int j;
05949
05950     for (j = 0; j < GRCC_MAXGROUP; j++) {
05951         if (elem[j] != NULL) {
05952             delete[] elem[j];
05953             elem[j] = NULL;
05954         }
05955     }
05956     delete[] elem;
05957     elem = NULL;
05958     clearGroup();
05959 }
05960
05961 //-----
05962 int *SGroup::genNext(void)
05963 {
05964     cgen = nextPerm(nnodes, necclass, eclass, pgr, pgq, permg, cgen);
05965     if (cgen < 0) {
05966         return NULL;
05967     }
05968     return permg;
05969 }
05970
05971 //-----
05972 void SGroup::addGroup(int *p)
05973 {
05974     int j;
05975
05976     if (nelem >= GRCC_MAXGROUP) {
05977         erEnd("addGroup : too many elements (GRCC_MAXGROUP)");
05978     }
05979     if (elem[nelem] == NULL) {
05980         elem[nelem] = new int[GRCC_MAXNODES];
05981     }
05982     for (j = 0; j < nnodes; j++) {
05983         elem[nelem][j] = p[j];
05984     }
05985     nelem++;
05986 }
05987
05988 //-----

```



```

05989 BigInt SGroup::nElem(void)
05990 {
05991     return nelelem;
05992 }
05993
05994 //-----
05995 int *SGroup::nextElem(void)
05996 {
05997     if (nelelem < 0) {
05998         cgen = nextPerm(nelelem, necclass, eclass,
05999             psr, psq, perms, cgen);
06000         return perms;
06001     }
06002     if (cgen < 0) {
06003         cgen = 0;
06004     }
06005     if (cgen >= nelelem) {
06006         return NULL;
06007     } else {
06008         return elem[cgen++];
06009     }
06010 }
06011
06012 //*****
06013 // egraph.cc
06014 // Generate scalar connected Feynman graphs.
06015 //=====
06016 static const char *GRCC_ND_names[] = GRCC_ND_NAMES;
06017 static const char *GRCC_ED_names[] = GRCC_ED_NAMES;
06018
06019 //=====
06020 // class ENode
06021 //-----
06022 ENode::ENode(void)
06023 {
06024     id      = -1;
06025     egraph  = NULL;
06026     edges   = NULL;
06027     maxdeg  = 0;
06028     deg     = 0;
06029
06030     klow    = NULL;
06031     extloop = 0;
06032     ndtype  = GRCC_ND_Undef;
06033
06034     intrct  = -1;
06035 }
06036
06037 //-----
06038 ENode::ENode(EGraph *egrph, int loops, int sdeg)
06039 {
06040 {
06041     id      = -1;
06042     egraph  = egrph;
06043     edges   = NULL;
06044     maxdeg  = sdeg;
06045     deg     = 0;
06046
06047     klow    = NULL;
06048     extloop = 0;
06049     ndtype  = GRCC_ND_Undef;
06050
06051     intrct  = -1;
06052
06053     edges = new int[sdeg];
06054     klow  = new int[loops+1];
06055 }
06056
06057 //-----
06058 ENode::~ENode(void)
06059 {
06060     if (klow != NULL) {
06061         delete[] klow;
06062         delete[] edges;
06063         klow = NULL;
06064         edges = NULL;
06065     }
06066 }
06067
06068 //-----
06069 void ENode::copy(ENode *en)
06070 {
06071     int d;
06072
06073     deg = en->deg;
06074     extloop = en->extloop;
06075     ndtype = en->ndtype;

```

```

06076     for (d = 0; d < deg; d++) {
06077         edges[d] = en->edges[d];
06078     }
06079 }
06080
06081 //-----
06082 void ENode::initAss(EGraph *egrph, int nid, int sdg)
06083 {
06084     id      = nid;
06085     egraph  = egrph;
06086     maxdeg  = sdg;
06087 }
06088
06089 //-----
06090 void ENode::setId(EGraph *egrph, const int nid)
06091 {
06092     id      = nid;
06093     egraph  = egrph;
06094 }
06095
06096 //-----
06097 void ENode::setExtern(int typ, int pt)
06098 {
06099     intrct  = pt;
06100     if (typ == GRCC_AT_Initial || typ == GRCC_AT_Final) {
06101         extloop = typ;
06102     } else {
06103         fprintf(GRCC_Stderr, "*** ENode::setExternal:: illegal typ=%d\n",
06104             typ);
06105         erEnd("ENode::setExternal:: illegal typ");
06106     }
06107 }
06108
06109 //-----
06110 void ENode::setType(int typ)
06111 {
06112     #ifdef CHECK
06113         if (ndtype != GRCC_ND_Undef && ndtype != typ) {
06114             fprintf(GRCC_Stderr, "*** ndtype is already defined : old=%d, new = %d\n",
06115                 ndtype, typ);
06116             erEnd("ndtype is already defined");
06117         }
06118     #endif
06119     ndtype = typ;
06120 }
06121
06122 //-----
06123 void ENode::print(void)
06124 {
06125     int j;
06126
06127     printf("Enode %d deg=%d, extl=%2d, intr=%d ",
06128         id, deg, extloop, intrct);
06129     if (egrph->bicount > 0) {
06130         printf("(%-8s) ", GRCC_ND_names[ndtype]);
06131     }
06132     printf("edge=[");
06133     for (j = 0; j < deg; j++) {
06134         printf(" %2d", edges[j]);
06135     }
06136     printf("]\n");
06137 }
06138
06139 //=====
06140 // class EEdge
06141 //-----
06142 EEdge::EEdge(void)
06143 {
06144     id      = -1;
06145     egraph  = NULL;
06146     nodes[0] = -1;
06147     nodes[1] = -1;
06148     // nlegs[0] = -1;
06149     // nlegs[1] = -1;
06150     ptcl    = GRCC_PT_Undef;
06151     deleted  = False;
06152
06153     edtype  = GRCC_ED_Undef;
06154     cut      = False;
06155
06156     emom = NULL;
06157     lmom = NULL;
06158
06159     momset = 0;
06160     momdir = 0;
06161 }
06162

```

```

06163 //-----
06164 EEdge::EEdge(EGraph *egrph, int nedges, int nloops)
06165 {
06166     id      = -1;
06167     egraph  = egrph;
06168     nodes[0] = -1;
06169     nodes[1] = -1;
06170     nlegs[0] = -1;
06171     nlegs[1] = -1;
06172     ptcl    = GRCC_PT_Undef;
06173     deleted  = False;
06174
06175     edtype   = GRCC_ED_Undef;
06176     cut      = False;
06177
06178     emom = new int[nedges];
06179     lmom = new int[nloops];
06180 }
06181
06182 //-----
06183 EEdge::~EEdge(void)
06184 {
06185     if (lmom != NULL) {
06186         delete[] lmom;
06187     }
06188     if (emom != NULL) {
06189         delete[] emom;
06190     }
06191 }
06192
06193 //-----
06194 void EEdge::copy(EEdge *ee)
06195 {
06196     nodes[0] = ee->nodes[0];
06197     nodes[1] = ee->nodes[1];
06198     id      = ee->id;
06199     ext     = ee->ext;
06200     dir     = ee->dir;
06201     edtype  = ee->edtype;
06202     cut     = ee->cut;
06203 }
06204
06205 //-----
06206 void EEdge::setId(EGraph *egrph, const int eid)
06207 {
06208     id      = eid;
06209     egraph  = egrph;
06210 }
06211
06212 //-----
06213 void EEdge::setType(int typ)
06214 {
06215     #ifndef CHECK
06216         if (edtype != GRCC_ED_Undef) {
06217             erEnd("edtype is already defined");
06218         }
06219     #endif
06220     edtype = typ;
06221 }
06222
06223 //-----
06224 void EEdge::setEMom(int nedges, int *em, int dir)
06225 {
06226     int e;
06227
06228     for (e = 0; e < nedges; e++) {
06229         if (em[e] != 0) {
06230             emom[e] = dir;
06231         }
06232     }
06233 }
06234
06235 //-----
06236 void EEdge::setLMom(int k, int dir)
06237 {
06238     lmom[k] = dir;
06239 }
06240
06241 //-----
06242 void EEdge::print(void)
06243 {
06244     int zero, n, k;
06245
06246     printf("Edge %2d ext=%d ptcl=%2d ", id, ext, ptcl);
06247     if (egrph == NULL || !egrph->assigned) {
06248         printf("[%d, %d]", nodes[0], nodes[1]);
06249     } else {

```

```

06250         printf("[%d,%d), (%d,%d)", nodes[0], nlegs[0], nodes[1], nlegs[1]);
06251     }
06252     if (momdir != 0) {
06253         printf("[%2d*%2lu]", momdir, momset);
06254     }
06255
06256     if (egraph != NULL && egraph->bicount > 0) {
06257         if (cut) {
06258             printf(" %-9s ", "Cut");
06259         } else {
06260             printf(" %-9s ", GRCC_ED_names[edtype]);
06261         }
06262         printf("c%2d: ", opicomp);
06263         printf("%s%d =", (ext)?"Q":"p", id);
06264         zero = True;
06265         for (n = 0; n < egraph->nEdges; n++) {
06266             if (emom[n] != 0) {
06267                 prMomStr(emom[n], "Q", n);
06268                 zero = False;
06269             }
06270         }
06271         for (k = 0; k < egraph->nLoops; k++) {
06272             if (lmom[k] != 0) {
06273                 prMomStr(lmom[k], "k", k);
06274                 zero = False;
06275             }
06276         }
06277         if (zero) {
06278             printf(" 0");
06279         }
06280     } else {
06281         if (egraph == NULL) {
06282             printf(" egraph=NULL");
06283         } else {
06284             printf(" egraph->bicount=%d", egraph->bicount);
06285         }
06286     }
06287     printf("\n");
06288 }
06289
06290 //=====
06291 // class EFLine
06292 //-----
06293 EFLine::EFLine(void)
06294 {
06295     ftype = FL_Open;
06296     fkind = 0;
06297     nlist = 0;
06298 }
06299
06300 //-----
06301 void EFLine::print(const char *msg)
06302 {
06303     if (ftype == FL_Open) {
06304         printf(" Open");
06305     } else if (ftype == FL_Closed) {
06306         printf(" Loop");
06307     } else {
06308         printf(" ?%d", ftype);
06309     }
06310     if (fkind == GRCC_PT_Dirac) {
06311         printf(" Dirac");
06312     } else if (fkind == GRCC_PT_Majorana) {
06313         printf(" Major");
06314     } else if (fkind == GRCC_PT_Ghost) {
06315         printf(" Ghost");
06316     } else {
06317         printf(" ?%d", fkind);
06318     }
06319     printf(" len=%d ", nlist);
06320     prIntArray(nlist, elist, msg);
06321 }
06322
06323 //=====
06324 // class EGraph
06325 //-----
06326 EGraph::EGraph(int nnodes, int nedges, int mxdeg)
06327 {
06328     // Arguments
06329     // nnodes : the number of nodes
06330     // nedges : the number of edges
06331     // mxdeg  : the maximum number of degrees of nodes
06332
06333     int j;
06334
06335     opt = NULL;
06336     mgraph = NULL;

```

```

06337     econn    = NULL;
06338
06339     sNodes   = nnodes;
06340     sEdges   = nedges;
06341     sMaxdeg  = mxdeg;
06342     sLoops   = sEdges - sNodes + 1;    // assume connected graph
06343
06344     pid      = -1;
06345     mid      = -1;
06346     aid      = -1;
06347     sid      = 0;
06348     gSubId   = -1;
06349     assigned = False;
06350
06351     nNodes   = sNodes;
06352     nEdges   = sEdges;
06353     nLoops   = 0;
06354     nExtern  = 0;
06355
06356     nsym     = 1;
06357     esym     = 1;
06358     extperm  = 1;
06359     nsym1    = 1;
06360     multp    = 1;
06361     totalc   = 0;
06362
06363     nodes = new ENode*[sNodes];
06364     for (j = 0; j < sNodes; j++) {
06365         nodes[j] = new ENode(this, sNodes, sMaxdeg);
06366     }
06367     edges = new EEdge*[sEdges];
06368     for (j = 0; j < sEdges; j++) {
06369         edges[j] = new EEdge(this, sEdges, sLoops);
06370     }
06371
06372     bidef    = new int[sNodes];
06373     bilow    = new int[sNodes];
06374     bicount  = -1;
06375
06376     extMom   = new int[sEdges+1];
06377
06378     fsign    = 1;
06379     nFlines  = -1;
06380     for (j = 0; j < GRCC_MAXFLINES; j++) {
06381         flines[j] = NULL;
06382     }
06383 }
06384
06385 //-----
06386 EGraph::~EGraph(void)
06387 {
06388     int j;
06389
06390     for (j = GRCC_MAXFLINES-1; j >= 0; j--) {
06391         if (flines[j] != NULL) {
06392             delete flines[j];
06393             flines[j] = NULL;
06394         }
06395     }
06396
06397     delete[] extMom;
06398
06399     delete[] bilow;
06400     delete[] bidef;
06401
06402     for (j = 0; j < sEdges; j++) {
06403         delete edges[j];
06404         edges[j] = NULL;
06405     }
06406     delete[] edges;
06407
06408     for (j = 0; j < sNodes; j++) {
06409         delete nodes[j];
06410         nodes[j] = NULL;
06411     }
06412     delete[] nodes;
06413
06414 }
06415
06416 //-----
06417 void EGraph::copy(EGraph *eg)
06418 {
06419     int nd, ed;
06420
06421     #ifdef CHECK
06422     if (sNodes < eg->nNodes || sEdges < eg->nEdges ||
06423         sMaxdeg < eg->sMaxdeg || sLoops < eg->nLoops) {

```

```

06424         erEnd("EGraph::copy: sizes are too small");
06425     }
06426 #endif
06427     model    = eg->model;
06428     proc     = eg->proc;
06429     sproc    = eg->sproc;
06430     mgraph   = eg->mgraph;
06431     opt      = mgraph->opt;
06432     econn    = mgraph->mconn;
06433
06434     pId      = eg->pId;
06435     mId      = eg->mId;
06436     gSubId   = eg->gSubId;
06437     nNodes   = eg->nNodes;
06438     nEdges   = eg->nEdges;
06439     nExtern  = eg->nExtern;
06440     nLoops   = eg->nLoops;
06441
06442     for (nd = 0; nd < nNodes; nd++) {
06443         nodes[nd]->copy(eg->nodes[nd]);
06444     }
06445     for (ed = 0; ed < nEdges; ed++) {
06446         edges[ed]->copy(eg->edges[ed]);
06447     }
06448
06449     nsym      = eg->nsym;
06450     esym      = eg->esym;
06451     extperm   = eg->extperm;
06452     nsym1     = eg->nsym1;
06453     multp     = eg->multp;
06454
06455     bicount = -1;
06456 }
06457
06458 //-----
06459 void EGraph::setExtLoop(int nd, int val)
06460 {
06461     // set the node 'nd' being an external node (-1) or a looped vertex
06462     nodes[nd]->extloop = val;
06463 }
06464
06465 //-----
06466 void EGraph::endSetExtLoop(void)
06467 {
06468     // end of calling 'setExtLoop'.
06469
06470     int n;
06471
06472     nExtern = 0;
06473     for (n = 0; n < nNodes; n++) {
06474         if (isExternal(n)) {
06475             nExtern++;
06476         }
06477     }
06478 }
06479
06480 //-----
06481 void EGraph::fromDGraph(DGraph *dg)
06482 {
06483     int deg[GRCC_MAXNODES];
06484     int maxdeg, nextern, nconn, tc;
06485     int n0, n1, e;
06486
06487     if (dg->nnodes > GRCC_MAXNODES) {
06488         fprintf(GRCC_Stderr, "*** too many nodes (GRCC_MAXNODES)\n");
06489         exit(1);
06490     }
06491     if (dg->nedges > GRCC_MAXEDGES) {
06492         fprintf(GRCC_Stderr, "*** too many edges (GRCC_MAXEDGES)\n");
06493         exit(1);
06494     }
06495
06496     for (e = 0; e < dg->nedges; e++) {
06497         if (dg->edges[e][0] >= dg->nnodes || dg->edges[e][1] >= dg->nnodes) {
06498             fprintf(GRCC_Stderr, "*** undefined node:");
06499             fprintf(GRCC_Stderr, "edge[%d] = {%d, %d}\n",
06500                 e, dg->edges[e][0], dg->edges[e][1]);
06501             exit(1);
06502         }
06503     }
06504
06505     for (n0 = 0; n0 < dg->nnodes; n0++) {
06506         deg[n0] = 0;
06507     }
06508     for (e = 0; e < dg->nedges; e++) {
06509         deg[dg->edges[e][0]]++;
06510         deg[dg->edges[e][1]]++;

```

```

06511     }
06512     maxdeg = 0;
06513     nextern = 0;
06514     for (n0 = 0; n0 < dg->nnodes; n0++) {
06515         maxdeg = Max(maxdeg, deg[n0]);
06516         if (deg[n0] == 1) {
06517             nextern++;
06518         } if (deg[n0] < 0) {
06519             fprintf(GRCC_Stderr, "+++ node %d is isolated\n", n0);
06520         }
06521     }
06522
06523     mgraph = NULL;
06524     model = NULL;
06525     proc = NULL;
06526     sproc = NULL;
06527     opt = NULL;
06528
06529     nNodes = dg->nnodes;
06530     nEdges = dg->nedges;
06531     nLoops = 0;
06532     nExtern = nextern;
06533
06534     pId = 0;
06535     mId = 0;
06536     aId = 0;
06537     gSubId = 0;
06538     nsym = 1;
06539     nsym1 = 1;
06540     esym = 1;
06541     extperm = 1;
06542     multp = 1;
06543     maxdeg = maxdeg;
06544
06545     for (n0 = 0; n0 < dg->nnodes; n0++) {
06546         nodes[n0]->deg = 0;
06547         nodes[n0]->extloop = dg->nodes[n0].extloop;
06548     }
06549     for (e = 0; e < dg->nedges; e++) {
06550         n0 = dg->edges[e][0];
06551         n1 = dg->edges[e][1];
06552         edges[e]->nodes[0] = n0;
06553         edges[e]->nodes[1] = n1;
06554         edges[e]->ext = (isExternal(n0) || isExternal(n1));
06555         edges[e]->momdir = 0;
06556
06557         nodes[n0]->edges[nodes[n0]->deg++] = I2Vedge(e, -1);
06558         nodes[n1]->edges[nodes[n1]->deg++] = I2Vedge(e, +1);
06559     }
06560     for (n0 = 0; n0 < dg->nnodes; n0++) {
06561         nodes[n0]->setId(this, n0);
06562         nodes[n0]->intrct = dg->nodes[n0].intrct;
06563     }
06564
06565     for (e = 0; e < nEdges; e++) {
06566         edges[e]->setId(this, e);
06567     }
06568     tc = 0;
06569     for (n0 = 0; n0 < nNodes; n0++) {
06570         if (isExternal(n0)) {
06571             setExtern(n0, 1, GRCC_AT_Initial);
06572         } else {
06573             tc += 2*nodes[n0]->extloop + nodes[n0]->deg - 2;
06574         }
06575     }
06576     totalc = tc;
06577
06578     // get the number of connected components
06579     nconn = connComp();
06580     nLoops = nEdges - nNodes + nconn;
06581
06582     bicount = -1;
06583 }
06584
06585 //-----
06586 void EGraph::fromMGraph(MGraph *mg)
06587 {
06588     // construct EGraph from adjacency matrix.
06589     // This function should be called after
06590     // EGraph(), setExtLoop() and endSetExtLoop().
06591
06592     int n0, n1, m0, m1, ed, e;
06593     int j, ni, nf;
06594     PNodeClass *pnc;
06595     int k;
06596
06597

```

```

06598 #ifdef CHECK
06599     if (sNodes < mg->nNodes || sEdges < mg->nEdges || sMaxdeg < mg->maxdeg) {
06600         erEnd("EGraph::fromMGraph: sizes are too small");
06601     }
06602     if (sLoops < mg->nLoops) {
06603         printf("too small sLoops : %d < %d\n", sLoops, mg->nLoops);
06604         erEnd("too small sLoops");
06605     }
06606 #endif
06607     mgraph = mg;
06608     opt = mgraph->opt;
06609     econn = mgraph->mconn;
06610     sproc = opt->sproc;
06611     if (sproc == NULL) {
06612         proc = NULL;
06613         model = NULL;
06614     } else {
06615         proc = sproc->proc;
06616         model = sproc->model;
06617     }
06618
06619     nNodes = mg->nNodes;
06620     nEdges = mg->nEdges;
06621     nLoops = mg->nLoops;
06622     nExtern = mg->nExtern;
06623     pId = mg->pId;
06624     mId = mg->cDiag;
06625     aId = -1;
06626     if (opt->proc != NULL) {
06627         mId = mg->opt->proc->mgrcount;
06628         sId = mg->opt->proc->agrcount;
06629     } else if (mg->opt->sproc != NULL) {
06630         mId = mg->opt->sproc->mgrcount;
06631         sId = mg->opt->sproc->agrcount;
06632     } else {
06633         mId = mg->cDiag;
06634         sId = mg->cDiag;
06635     }
06636     gSubId = 0;
06637     nsym = mg->nsym;
06638     esym = mg->esym;
06639     extperm = 1;
06640     nsym1 = nsym;
06641     multp = 1;
06642     maxdeg = mg->maxdeg;
06643
06644     totalc = 0;
06645     if (proc != NULL) {
06646         for (j = 0; j < proc->model->ncouple; j++) {
06647             totalc += proc->clist[j];
06648         }
06649     }
06650     for (ed = 0; ed < nEdges; ed++) {
06651         edges[ed]->edtype = GRCC_ED_Undef;
06652     }
06653
06654     ed = 0;
06655     for (n0 = 0; n0 < nNodes; n0++) {
06656         nodes[n0]->deg = 0;
06657     }
06658     for (n0 = 0; n0 < nNodes; n0++) {
06659         for (e = 0; e < mg->adjMat[n0][n0]/2; e++, ed++) {
06660             edges[ed]->nodes[0] = n0;
06661             edges[ed]->nodes[1] = n0;
06662             nodes[n0]->edges[nodes[n0]->deg++] = I2Vedge(ed, -1);
06663             nodes[n0]->edges[nodes[n0]->deg++] = I2Vedge(ed, +1);
06664             edges[ed]->ext = isExternal(n0);
06665         }
06666         for (n1 = n0+1; n1 < nNodes; n1++) {
06667             for (e = 0; e < mg->adjMat[n0][n1]; e++, ed++) {
06668                 edges[ed]->nodes[0] = n0;
06669                 edges[ed]->nodes[1] = n1;
06670                 nodes[n0]->edges[nodes[n0]->deg++] = I2Vedge(ed, -1);
06671                 nodes[n1]->edges[nodes[n1]->deg++] = I2Vedge(ed, +1);
06672                 edges[ed]->ext = (isExternal(n0) || isExternal(n1));
06673             }
06674         }
06675     }
06676 #ifdef CHECK
06677     if (ed != nEdges) {
06678         printf("*** EGraph::init: ed=%d != nEdges=%d\n",
06679             ed, nEdges+1);
06680         erEnd("EGraph::init: illegal connection");
06681     }
06682 #endif
06683
06684     for (j = 0; j < nNodes; j++) {

```



```

06685     nodes[j]->setId(this, j);
06686     nodes[j]->intrct = mg->nodes[j]->extloop;
06687 }
06688
06689 for (j = 0; j < nEdges; j++) {
06690     edges[j]->setId(this, j);
06691 }
06692
06693 ni = 0;
06694 nf = 0;
06695 if (proc != NULL) {
06696     ni = proc->ninitl;
06697     for (j = 0; j < ni; j++) {
06698         setExtern(j, proc->initlPart[j], GRCC_AT_Initial);
06699     }
06700
06701     nf = proc->nfinal;
06702     for (j = 0; j < nf; j++) {
06703         setExtern(j+ni, proc->finalPart[j], GRCC_AT_Final);
06704     }
06705     nExtern = ni + nf;
06706 } else if (sproc != NULL) {
06707     pnc = sproc->pnclass;
06708     for (j = 0; j < sproc->pnclass->nclass; j++) {
06709         if (pnc->type[j] == GRCC_AT_Initial
06710             || pnc->type[j] == GRCC_AT_External) {
06711             for (k = pnc->cl2nd[j]; k < pnc->cl2nd[j+1]; k++) {
06712                 setExtern(j, k, GRCC_AT_Initial);
06713                 ni++;
06714             }
06715         } else if (sproc->pnclass->type[j] == GRCC_AT_Final) {
06716             for (k = pnc->cl2nd[j]; k < pnc->cl2nd[j+1]; k++) {
06717                 setExtern(j, k, GRCC_AT_Final);
06718                 nf++;
06719             }
06720         }
06721     }
06722     nExtern = ni + nf;
06723 }
06724
06725 totalc = 0;
06726 for (j = 0; j < nNodes; j++) {
06727     if (!isExternal(j)) {
06728         totalc += 2*nodes[j]->extloop + nodes[j]->deg - 2;
06729     }
06730 }
06731
06732 for (ed = 0; ed < nEdges; ed++) {
06733     edges[ed]->momdir = 0;
06734 }
06735 for (e = 0; e < econn->sedges; e++) {
06736     m0 = econn->cedges[e].nodes[0];
06737     m1 = econn->cedges[e].nodes[1];
06738
06739     bool found = False;
06740     for (ed = 0; ed < nEdges; ed++) {
06741         if (edges[ed]->momdir != 0) {
06742             continue;
06743         }
06744         n0 = edges[ed]->nodes[0];
06745         n1 = edges[ed]->nodes[1];
06746         if (m0 == n0 && m1 == n1) {
06747             edges[ed]->momdir = econn->cedges[e].momdir;
06748             edges[ed]->momset = econn->cedges[e].momset;
06749             found = True;
06750             break;
06751         } else if (m0 == n1 && m1 == n0) {
06752             edges[ed]->momdir = - econn->cedges[e].momdir;
06753             edges[ed]->momset = econn->cedges[e].momset;
06754             found = True;
06755             break;
06756         }
06757     }
06758
06759     if (!found) {
06760         printf("*** EGraph::fromMGraph:edge (%d->%d) is not found\n",
06761             m0, m1);
06762     }
06763 }
06764
06765 bicount = -1;
06766 }
06767
06768 //-----
06769 ENode *EGraph::setExtern(int n0, int pt, int ndtyp)
06770 {
06771     ENode *nd;

```

```

06772     int npt, ept, eg;
06773
06774     nd = nodes[n0];
06775     if (nd->deg != 1) {
06776         if (prlevel > 0) {
06777             fprintf(GRCC_Stderr, "*** illegal external particle %d, %d, %d\n",
06778                 n0, pt, ndtyp);
06779         }
06780         erEnd("illegal external particle");
06781     }
06782
06783     // particle comes into the node
06784     if (ndtyp == GRCC_AT_Initial) {
06785         npt = pt;
06786     } else if (ndtyp == GRCC_AT_Final) {
06787         npt = -pt;
06788     } else {
06789         npt = 0;
06790         if (prlevel > 0) {
06791             fprintf(GRCC_Stderr, "*** illegal type of an external particle : "
06792                 "node = %d, particle = %d, type = %d", n0, pt, ndtyp);
06793         }
06794         erEnd("illegal type of an external particle");
06795     }
06796
06797     // edge attached to the external node
06798     eg = n0;
06799
06800     // particle flows on e from leg=0 to 1.
06801     if (model != NULL) {
06802         npt = model->normalParticle(npt);
06803         ept = model->normalParticle(npt);
06804     } else {
06805         npt = 0;
06806         ept = 0;
06807     }
06808
06809     nd->setExtern(ndtyp, npt);
06810     edges[eg]->ptcl = ept;
06811
06812     return nd;
06813 }
06814
06815 //-----
06816 void EGraph::print(void)
06817 {
06818     // print the EGraph
06819
06820     int nd, ed, nlp;
06821
06822     nlp = nEdges - nNodes + 1;
06823     printf("\nEGraph\n");
06824     printf("    pId=%d, gSubId=%d, mId=%d, aId=%d, sId=%d\n",
06825         pId, gSubId, mId, aId, sId);
06826     printf("    sNodes=%d, sEdges=%d, sMaxdeg=%d, sLoops=%d\n",
06827         sNodes, sEdges, sMaxdeg, sLoops);
06828     printf("    nNodes=%d, nEdges=%d, nExtern=%d, nLoops=%d, totalc=%d\n",
06829         nNodes, nEdges, nExtern, nlp, totalc);
06830     printf("    ");
06831     if (model == NULL) {
06832         printf("model=NULL,");
06833     } else {
06834         printf("model=\"%s\",", model->name);
06835     }
06836     if (proc == NULL) {
06837         printf("proc=NULL,");
06838     } else {
06839         printf("proc=%d,", proc->id);
06840     }
06841     if (sproc == NULL) {
06842         printf("sproc=NULL,");
06843     } else {
06844         printf("sproc=%d,", sproc->id);
06845     }
06846     printf("\n");
06847     printf("    assigned=%d, sym = (%ld * %ld) ",
06848         assigned, nsym, esym);
06849     printf("extperm=%ld, nsym1=%ld, multp=%ld\n",
06850         extperm, nsym1, multp);
06851
06852     printf("    Nodes\n");
06853     for (nd = 0; nd < nNodes; nd++) {
06854         if (isExternal(nd)) {
06855             printf("        %2d Extern ", nd);
06856         } else {
06857             printf("        %2d Vertex ", nd);
06858         }

```

```

06859     nodes[nd]->print();
06860 }
06861 printf("  Edges\n");
06862 for (ed = 0; ed < nEdges; ed++) {
06863     if (edges[ed]->ext) {
06864         printf("    %2d Extern ", ed);
06865     } else {
06866         printf("    %2d Intern ", ed);
06867     }
06868     edges[ed]->print();
06869 }
06870 if (bicount > 0) {
06871     printf("  Biconn: nopicomp=%d, nopi2p=%d, opi2plp=%d, nadj2ptv=%d\n",
06872           nopicomp, nopi2p, opi2plp, nadj2ptv);
06873 }
06874 printf("\n");
06875
06876 if (nFlines > 0) {
06877     prFLines();
06878 }
06879 }
06880
06881 //-----
06882 void EGraph::printPy(FILE *fp, long mId)
06883 {
06884     if (!assigned) {
06885         mgraph->printPy(fp, mId);
06886         return;
06887     }
06888
06889     fprintf(fp, "#AGraph : (gseq, {spid, gid, ...}, nodes, node-group)\n");
06890     fprintf(fp, " (%ld,\n", mId);
06891
06892     // {'proc':0, 'subproc':0, 'tgraph':1, ... }
06893     fprintf(fp, "   {'proc':%d, 'subproc':%d, ", proc->id, sproc->id);
06894     fprintf(fp, "'tgraph':%ld, ", mId);
06895     fprintf(fp, "'OPI':%s, ", BOOLSTR(opt->values[GRCC_OPT_1PI]));
06896     fprintf(fp, "'agraph':%ld, \n", aId);
06897     fprintf(fp, "   'nnodes':%d, 'nnsym':%ld, 'nesym':%ld, },\n",
06898           nNodes, nsym, esym);
06899
06900     // #nodes
06901     fprintf(fp, " [ #nodes\n");
06902     for (int nd = 0; nd < nNodes; nd++) {
06903         ENode *end = nodes[nd];
06904
06905         // #node 0: external=phi
06906         // #node 4: phi3=0
06907         fprintf(fp, " [ #node %d: ", nd);
06908         fprintf(fp, "\n");
06909
06910         // {'deg':1, 'cid':-3, ..., }
06911         fprintf(fp, "   {'deg':%d, 'cid':%d, 'extern':%s, ",
06912               end->deg, 0, BOOLSTR(isExternal(nd)));
06913         fprintf(fp, "'intr':%d, 'loop':%d, },\n",
06914               end->intrct, end->extloop);
06915
06916         // legs : (edge, leg, particle)
06917         // [ (0, 1, 0), ... ],
06918         fprintf(fp, " [ ");
06919         for (int lg = 0; lg < end->deg; lg++) {
06920             int ed = V2Iedge(end->edges[lg]);
06921             int ptcl = edges[ed]->ptcl;
06922             int edlg = (edges[ed]->nodes[0] == nd) ? 1 : 0;
06923             int nnd = edges[ed]->nodes[edlg];
06924             int nlg = edges[ed]->nlegs[edlg];
06925             fprintf(fp, " (%d, %d, %d), ", nnd, ptcl, nlg);
06926         }
06927         fprintf(fp, " ],\n");
06928         // end #node
06929     }
06930     fprintf(fp, " ], #node\n");
06931     fprintf(fp, " [ # group of 1 elements\n");
06932     fprintf(fp, " [ ], #\n");
06933     fprintf(fp, " ], # group\n");
06934     fprintf(fp, " )\n");
06935 }
06936 //-----
06937 void EGraph::prFLines(void)
06938 {
06939     int j;
06940
06941     printf("  Fermion lines %d, sign=%d (mId=%ld, aId=%ld)\n",
06942           nFlines, fsign, mId, aId);
06943     for (j = 0; j < nFlines; j++) {
06944         printf("%4d ", j);
06945         flines[j]->print("\n");
06946     }

```

```

06946     }
06947 }
06948
06949 //-----
06950 int EGraph::dirEdge(int n, int e)
06951 {
06952     if (nodes[n]->edges[e] > 0) {
06953         return 1;
06954     } else {
06955         return -1;
06956     }
06957 }
06958
06959 //-----
06960 int EGraph::cmpMom(int *lm0, int *em0, int *lm1, int *em1)
06961 {
06962     int lp, ed, cmp, sgn = 0;
06963
06964     for (lp = 0; lp < nLoops; lp++) {
06965         if (lm0[lp] != 0) {
06966             if (lm1[lp] == 0) {
06967                 return 1;
06968             } else if (sgn == 0) {
06969                 sgn = lm0[lp]*lm1[lp];    // cancel first non-zero elements
06970 #ifdef CHECK
06971                 if (Abs(sgn) != 1) {
06972                     erEnd("cmpMom : illegal element of lmom");
06973                 }
06974 #endif
06975             } else {
06976                 cmp = lm0[lp] - sgn*lm1[lp];
06977                 if (cmp != 0) {
06978                     return cmp;
06979                 }
06980             }
06981         } else if (lm1[lp] != 0) {    // lm0[lp] == 0
06982             return -1;
06983         }
06984     }
06985     for (ed = 0; ed < nEdges; ed++) {
06986         if (em0[ed] != 0) {
06987             if (em1[ed] == 0) {
06988                 return 1;
06989             } else if (sgn == 0) {
06990                 sgn = em0[ed]*em1[ed];    // cancel first non-zero elements
06991 #ifdef CHECK
06992                 if (Abs(sgn) != 1) {
06993                     erEnd("cmpMom : illegal element of emom");
06994                 }
06995 #endif
06996             } else {
06997                 cmp = em0[ed] - sgn*em1[ed];
06998                 if (cmp != 0) {
06999                     return cmp;
07000                 }
07001             }
07002         } else if (em1[ed] != 0) {    // em0[ed] == 0
07003             return -1;
07004         }
07005     }
07006     return 0;
07007 }
07008
07009 //-----
07010 int EGraph::groupLMom(int *grp, int *ed2gr)
07011 {
07012     // grp[g] : the number of elements in the group g (in [0,...,(ngrp-1)])
07013     // ed2gr[ed] : group number of edge ed.
07014
07015     int ed0, ed1, cmp, ngrp = -1;
07016
07017     for (ed0 = 0; ed0 < nEdges; ed0++) {
07018         ed2gr[ed0] = -1;
07019         grp[ed0] = 0;
07020     }
07021
07022     for (ed0 = 0; ed0 < nEdges; ed0++) {
07023         if (ed2gr[ed0] < 0) {
07024             ngrp++;
07025             ed2gr[ed0] = ngrp;
07026             grp[ngrp]++;
07027             for (ed1 = ed0+1; ed1 < nEdges; ed1++) {
07028                 cmp = cmpMom(edges[ed0]->lmom, edges[ed0]->emom,
07029                             edges[ed1]->lmom, edges[ed1]->emom);
07030                 if (cmp == 0) {
07031                     ed2gr[ed1] = ngrp;
07032                     grp[ngrp]++;

```

```

07033     }
07034     }
07035     }
07036 }
07037 ngrp++;
07038
07039 return ngrp;
07040 }
07041
07042 //-----
07043 Bool EGraph::optQGrafM(Options *opt)
07044 {
07045     int *qgopt = opt->qgopt;
07046     int nopis[GRCC_MAXEDGES];
07047     ULong mext = 0;
07048     mext = (~ mext) « nExtern;
07049
07050 #ifdef PRINT
07051     printf("optQGrafM:");
07052     print();
07053 #endif
07054
07055 #ifdef PRINT
07056     printf("optQGrafM: %ld\n", mId);
07057     econn->print();
07058 #endif
07059
07060     // count the number of self-energy 1PI components.
07061     int maxlegs = 0;
07062     for (int j = 0; j < econn->nopic; j++) {
07063         maxlegs = Max(maxlegs, econn->opics[j].nlegs);
07064     }
07065     if (maxlegs >= GRCC_MAXEDGES) {
07066         printf("*** table overflow\n");
07067         abort();
07068     }
07069     for (int k = 0; k < GRCC_MAXEDGES; k++) {
07070         nopis[k] = 0;
07071     }
07072     for (int j = 0; j < econn->nopic; j++) {
07073         nopis[econn->opics[j].nlegs]++;
07074     }
07075
07076     //
07077     if (qgopt[GRCC_QGRAF_OPT_ONEPI] > 0) {
07078         if (econn->nopic != 1) {
07079             return False;
07080         }
07081     } else if (qgopt[GRCC_QGRAF_OPT_ONEPI] < 0) {
07082         if (econn->nopic < 2) {
07083             return False;
07084         }
07085     }
07086
07087     if (qgopt[GRCC_QGRAF_OPT_ONSHELL] != 0) {
07088         if (nExtern == 1) {
07089             if (qgopt[GRCC_QGRAF_OPT_ONSHELL] > 0) {
07090                 if (econn->nopic != 1) {
07091                     return False;
07092                 }
07093             } else if (qgopt[GRCC_QGRAF_OPT_ONSHELL] < 0) {
07094                 if (econn->nopic == 1) {
07095                     return False;
07096                 }
07097             }
07098         } else {
07099             if (qgopt[GRCC_QGRAF_OPT_ONSHELL] > 0) {
07100                 if (econn->nelbridges > 0) {
07101                     return False;
07102                 }
07103             } else if (qgopt[GRCC_QGRAF_OPT_ONSHELL] < 0) {
07104                 if (econn->nelbridges <= 0) {
07105                     return False;
07106                 }
07107             }
07108         }
07109     }
07110
07111     if (qgopt[GRCC_QGRAF_OPT_NOSNAIL] != 0) {
07112         if (qgopt[GRCC_QGRAF_OPT_NOSNAIL] > 0) {
07113             if (nExtern == 1) {
07114                 if (econn->nblocks != 1) {
07115                     return False;
07116                 }
07117             } else {
07118                 if (mgraph->mconn->ne0bridges >= 1 ||
07119                     mgraph->mconn->nalblocks >= 1) {

```

```

07120         return False;
07121     }
07122 }
07123 } else if (qgopt[GRCC_QGRAF_OPT_NOSNAIL] < 0) {
07124     if (nExtern == 1) {
07125         if (econn->nblocks == 1) {
07126             return False;
07127         }
07128     } else {
07129         if (mgraph->mconn->ne0bridges < 1 &&
07130             mgraph->mconn->nalblocks < 1) {
07131             return False;
07132         }
07133     }
07134 }
07135 }
07136
07137 if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] != 0) {
07138     if (nExtern == 1) {
07139         if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] > 0) {
07140             if (econn->nopic != 1) {
07141                 return False;
07142             }
07143         } else if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] < 0) {
07144             if (econn->nopic == 1) {
07145                 return False;
07146             }
07147         }
07148     } else {
07149         if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] > 0) {
07150             if (mgraph->mconn->ne0bridges != 0) {
07151                 return False;
07152             }
07153         } else if (qgopt[GRCC_QGRAF_OPT_NOTADPOLE] < 0) {
07154             if (mgraph->mconn->ne0bridges == 0) {
07155                 return False;
07156             }
07157         }
07158     }
07159 }
07160
07161 if (qgopt[GRCC_QGRAF_OPT_NOSIGMA] != 0) {
07162     bool ok = True;
07163     if (nExtern != 2) {
07164         if (nopis[2] > 1) {
07165             ok = False;
07166         }
07167     }
07168     for (int j = 0; j < econn->nopic; j++) {
07169         if (econn->opics[j].nlegs >= 2 &&
07170             econn->opics[j].nlegs == econn->opics[j].mom0lg) {
07171             ok = False;
07172         }
07173     }
07174
07175     // loop momenta
07176     for (int j = 0; j < econn->sedges - 1; j++) {
07177         ULong momj = econn->cedges[j].momset;
07178         if (momj == 0) {
07179             continue;
07180         }
07181         int extj = 0;
07182         if (econn->cedges[j].nodes[0] < nExtern) {
07183             extj = 1;
07184         } else if (econn->cedges[j].nodes[1] < nExtern) {
07185             extj = 1;
07186         }
07187         for (int k = j+1; k < econn->sedges; k++) {
07188             ULong momk = econn->cedges[k].momset;
07189             if (momk == 0) {
07190                 continue;
07191             }
07192             int extk = 0;
07193             if (econn->cedges[k].nodes[0] < nExtern) {
07194                 extk = 1;
07195             } else if (econn->cedges[k].nodes[1] < nExtern) {
07196                 extk = 1;
07197             }
07198             if (momj == momk) {
07199                 if (nExtern == 2) {
07200                     if (extj + extk != 2) {
07201                         ok = False;
07202                     }
07203                 } else {
07204                     ok = False;
07205                 }
07206             }

```

```

07207         }
07208     }
07209     if (qgopt[GRCC_QGRAF_OPT_NOSIGMA] > 0) {
07210         if (! ok) {
07211             return False;
07212         }
07213     } else if (qgopt[GRCC_QGRAF_OPT_NOSIGMA] < 0) {
07214         if (ok) {
07215             return False;
07216         }
07217     }
07218 }
07219
07220 if (qgopt[GRCC_QGRAF_OPT_SIMPLE] > 0) {
07221     if (mgraph->selfloop || mgraph->multiedge) {
07222         return False;
07223     }
07224 } else if (qgopt[GRCC_QGRAF_OPT_SIMPLE] < 0) {
07225     if (!mgraph->selfloop && !mgraph->multiedge) {
07226         return False;
07227     }
07228 }
07229
07230 if (qgopt[GRCC_QGRAF_OPT_BIPART] > 0) {
07231     if (! mgraph->bipart) {
07232         return False;
07233     }
07234 } else if (qgopt[GRCC_QGRAF_OPT_BIPART] < 0) {
07235     if (mgraph->bipart) {
07236         return False;
07237     }
07238 }
07239 // GRCC_QGRAF_OPT_CYCLI
07240 if (qgopt[GRCC_QGRAF_OPT_CYCLI] != 0) {
07241     int nb = 0;
07242     for (int k = 0; k < econn->nblocks; k++) {
07243         if (econn->blocks[k].loop > 0) {
07244             nb++;
07245         }
07246     }
07247     if (qgopt[GRCC_QGRAF_OPT_CYCLI] > 0) {
07248         if (nb > 1) {
07249             return False;
07250         }
07251     } else if (qgopt[GRCC_QGRAF_OPT_CYCLI] < 0) {
07252         if (nb <= 1) {
07253             return False;
07254         }
07255     }
07256 }
07257
07258 return True;
07259 }
07260
07261 //-----
07262 Bool EGraph::optQGrafA(Options *opt)
07263 {
07264     #ifdef PRINT
07265         printf("optQGrafA: %8ld\n", mId);
07266         econn->print();
07267     #endif
07268     Bool retval = True;
07269     if (opt->qgopt[GRCC_QGRAF_OPT_FLOOP] != 0) {
07270         for (int fl=0; fl < nFlines; fl++) {
07271             if (flines[fl]->ftype == FL_Closed) {
07272                 if (flines[fl]->nlist % 2 != 0) {
07273                     retval = False;
07274                     break;
07275                 }
07276             }
07277         }
07278         // `notfloop_` is the dual of `floop_`, so flip the decision:
07279         if (opt->qgopt[GRCC_QGRAF_OPT_FLOOP] == -1) {
07280             retval = (retval == True ? False : True);
07281         }
07282     }
07283     return retval;
07284 }
07285
07286 //-----
07287 Bool EGraph::isOptE(void)
07288 {
07289     EGraph edupv = EGraph(sNodes, sEdges, sMaxdeg);
07290     EGraph *edup = &edupv;
07291     int grp[GRCC_MAXEDGES], ed2gr[GRCC_MAXEDGES];
07292     int g, ed, ngrp;
07293     Bool ok;

```

```

07294     int     minopi2p;
07295
07296
07297 // if (opt->values[GRCC_OPT_No2PtL1PI] == 0
07298 //     && opt->values[GRCC_OPT_NoAdj2PtV] == 0) {
07299 //     return True;
07300 // }
07301
07302     for (ed = 0; ed < nEdges; ed++) {
07303         edges[ed]->cut = False;
07304     }
07305
07306     biconnE();
07307
07308     // QGraf options
07309     if (! optQGrafM(opt)) {
07310         return False;
07311     }
07312
07313     if (opt->values[GRCC_OPT_NoAdj2PtV] > 0) {
07314         if (nadj2ptv > 0) {
07315             return False;
07316         }
07317     } else if (opt->values[GRCC_OPT_NoAdj2PtV] < 0) {
07318         if (nadj2ptv < 1) {
07319             return False;
07320         }
07321     }
07322     if (opt->values[GRCC_OPT_No2PtL1PI] == 0) {
07323         return True;
07324     }
07325
07326     if (nExtern == 2 && nopicomp == 1) {
07327         minopi2p = 2;
07328     } else {
07329         minopi2p = 1;
07330     }
07331
07332     if (opi2plp > 0 && nopi2p >= minopi2p) {
07333         if (opt->values[GRCC_OPT_No2PtL1PI] > 0) {
07334             return False;
07335         } else if (opt->values[GRCC_OPT_No2PtL1PI] < 0) {
07336             return True;
07337         }
07338     }
07339
07340     edup->copy(this);
07341     ngrp = groupLMom(grp, ed2gr);
07342
07343     for (g = 0; g < ngrp; g++) {
07344         ok = True;
07345         if (grp[g] < 2) {
07346             continue;
07347         }
07348         for (ed = 0; ed < nEdges; ed++) {
07349             if (ed2gr[ed] == g) {
07350                 if (edges[ed]->ext) {
07351                     ok = False;
07352                     break;
07353                 }
07354                 edup->edges[ed]->cut = True;
07355             } else {
07356                 edup->edges[ed]->cut = False;
07357             }
07358         }
07359         if (ok) {
07360             edup->gSubId++;
07361             edup->biconnE();
07362
07363             if (edup->nExtern == 2 && edup->nopicomp == 1) {
07364                 minopi2p = 2;
07365             } else {
07366                 minopi2p = 1;
07367             }
07368
07369             if (edup->opi2plp > 0 && edup->nopi2p >= minopi2p) {
07370                 if (opt->values[GRCC_OPT_No2PtL1PI] > 0) {
07371                     return False;
07372                 } else if (opt->values[GRCC_OPT_No2PtL1PI] < 0) {
07373                     return True;
07374                 }
07375             }
07376         }
07377     }
07378
07379     if (opt->values[GRCC_OPT_No2PtL1PI] > 0) {
07380         return True;

```



```

07381     } else if (opt->values[GRCC_OPT_No2PtL1PI] < 0) {
07382         return False;
07383     } else {
07384         erEnd("isOptE: illegal control");
07385         return False;
07386     }
07387 }
07388
07389 //-----
07390 int EGraph::findRoot(void)
07391 {
07392     int root, vr, er, e, nd0, nd1;
07393
07394     root = -1;
07395     vr = -1;
07396     er = -1;
07397     for (e = 0; e < nEdges; e++) {
07398         if (edges[e]->cut || edges[e]->edtype == GRCC_ED_Deleted) {
07399             continue;
07400         }
07401         if (edges[e]->visited) {
07402             continue;
07403         }
07404         if (root < 0) {
07405             if (edges[e]->ext) {
07406                 nd0 = edges[e]->nodes[0];
07407                 nd1 = edges[e]->nodes[1];
07408                 if (isExternal(nd0) && !isExternal(nd1)) {
07409                     root = nd1;
07410                     break;
07411                 } else if (!isExternal(nd0) && isExternal(nd1)) {
07412                     root = nd0;
07413                     break;
07414                 }
07415             }
07416         }
07417         if (er < 0) {
07418             er = edges[e]->nodes[0];
07419         }
07420         if (vr < 0) {
07421             vr = edges[e]->nodes[0];
07422         }
07423     }
07424     // if root >= 0 : vertex adjacent to an external node
07425     if (root < 0) {
07426         // if vr >= 0 : a vertex
07427         if (vr >= 0) {
07428             root = vr;
07429         }
07430         // no vertex, only external nodes;
07431         } else {
07432             root = er;
07433         }
07434     }
07435     return root;
07436 }
07437
07438 //-----
07439 int EGraph::connComp(void)
07440 {
07441     // Count the number of connected component
07442     // If a connected component without free leg is not the whole graph then
07443     // return False, otherwise return True.
07444
07445     int j, ncc, nelelem;
07446
07447     for (j = 0; j < nNodes; j++) {
07448         nodes[j]->visited = -1;
07449     }
07450     ncc = 0; // # connected components
07451     nelelem = 0; // # visited nodes
07452     while (nelelem < nNodes) {
07453         for (j = 0; j < nNodes; j++) {
07454             if (nodes[j]->visited < 0) {
07455                 break;
07456             }
07457         }
07458         if (j >= nNodes) {
07459             break;
07460         }
07461         nelelem += connVisit(j, ncc);
07462         ncc++;
07463     }
07464     if (nelelem != nNodes) {
07465         erEnd("EGraph::connComp: illegal control");
07466     }
07467     return ncc;

```

```

07468 }
07469
07470 //-----
07471 int EGraph::connVisit(int nd, int ncc)
07472 {
07473     // Visiting connected node used for 'connComp'
07474
07475     int e, en, nn, j, nelelem;
07476
07477     nelelem = 1;
07478     nodes[nd]->visited = ncc;
07479     for (e = 0; e < nodes[nd]->deg; e++) {
07480         en = V2Iedge(nodes[nd]->edges[e]);
07481         for (j = 0; j < 2; j++) {
07482             nn = edges[en]->nodes[j];
07483             if (nodes[nn]->visited < 0) {
07484                 nelelem += connVisit(nn, ncc);
07485             }
07486         }
07487     }
07488     return nelelem;
07489 }
07490
07491 //-----
07492 void EGraph::biconnE(void)
07493 {
07494     int e, ie, root;
07495     int extlst[GRCC_MAXEDGES], intlst[GRCC_MAXEDGES];
07496     int opiext, opiloop;
07497
07498     nadj2ptv = 0;
07499     for (e = 0; e < nEdges; e++) {
07500         if (nodes[edges[e]->nodes[0]]->deg == 2 &&
07501             nodes[edges[e]->nodes[1]]->deg == 2 &&
07502             edges[e]->nodes[0] != edges[e]->nodes[1]) {
07503             nadj2ptv++;
07504         }
07505     }
07506
07507     biinitE(); // initialization
07508     bconn = 0; // the number of connected components
07509
07510     opiext = 0;
07511     opiloop = 0;
07512
07513     for (e = 0; e < nEdges; e++) {
07514         // root of a spanning tree to be searched.
07515         root = findRoot();
07516         if (root < 0) {
07517             // no root : end of search
07518             break;
07519         }
07520
07521         // recursive search
07522         bisearchE(root, extlst, intlst, &opiext, &opiloop);
07523
07524         // opi2plp = Max(opi2plp, opiloop); // ???
07525
07526         // adjust the #external for the root
07527         if (isExternal(root)) {
07528             opiext++;
07529         }
07530
07531         // 2 point function
07532         if (opiext == 2) {
07533             opi2plp = Max(opi2plp, opiloop);
07534             nopi2p++;
07535         }
07536         for (ie = 0; ie < nEdges; ie++) {
07537             if (intlst[ie]) {
07538                 edges[ie]->opicomp = nopicomp;
07539             }
07540         }
07541         nopicomp++;
07542         bconn++; // the number of connected component
07543     }
07544
07545     // momentum conservation of external particles
07546     extMomConsv();
07547
07548 #ifdef CHECK
07549     chkMomConsv();
07550 #endif
07551     return;
07552 }
07553
07554

```

```

07555 //-----
07556 void EGraph::biinitE(void)
07557 {
07558     int n, j, e;
07559
07560     bicount = 0;           // counter of visiting node
07561     loopm   = 0;           // # of independent loop momentum
07562
07563     nopicomp = 0;
07564     opi2plp  = 0;
07565     nopi2p   = 0;
07566
07567     for (n = 0; n < nNodes; n++) {
07568         bidef[n] = -1;
07569         bilow[n] = -1;
07570         nodes[n]->ndtype = GRCC_ND_Undef;
07571         for (j = 0; j < nLoops; j++) {
07572             nodes[n]->klow[j] = -1;
07573         }
07574     }
07575
07576     for (e = 0; e < nEdges; e++) {
07577         // edges[e]->cut is defined before
07578         edges[e]->visited = False;
07579         edges[e]->conid   = -1;           // connected component
07580         edges[e]->edtype  = GRCC_ED_Undef;
07581         edges[e]->opicomp = -1;
07582         for (j = 0; j < nEdges; j++) {
07583             edges[e]->emom[j] = 0;       // coefficients of ext. mom.
07584         }
07585         for (j = 0; j < nLoops; j++) {
07586             edges[e]->lmom[j] = 0;       // coefficients of loop mom.
07587         }
07588     }
07589 }
07590
07591 //-----
07592 void EGraph::bisearchE(int nd, int *extlst, int *intlst, int *opiext, int *opiloop)
07593 {
07594     // Search in the spanning tree below 'nd'.
07595     // Arguments:
07596     //   nd      : input   : node to be visited
07597     //   extlst  : output  : set of external lines in the current 1PI comp.
07598     //   intlst  : output  : set of internal lines in the current 1PI comp.
07599     //   opiext  : output  : no. external lines of the current 1PI component
07600     //   opiloop : output  : no. loops of the current 1PI component
07601     //
07602     // EGraph variables
07603     //   bicount : counter of visiting node
07604     //   loopm   : no. of independent loop momentum
07605     //   nopicomp : no. of OPI components
07606     //   opi2plp : maximum number loops among 2-point looped OPI components
07607     //   nopi2p  : no. of 2-point OPI components
07608     //   edges[ie]->opicomp : OPI component no. of the edge
07609     //
07610     int k, e, ie, ed, td, dir, j;
07611     int opiext1, opiloop1;
07612     int extlst1[GRCC_MAXEDGES]; // set of external nodes below
07613     int intlst1[GRCC_MAXEDGES]; // set of vertices in the 1PI component
07614
07615     (*opiext) = 0;
07616     (*opiloop) = 0;
07617
07618     // visit node 'nd'
07619     bidef[nd] = bicount;
07620     bilow[nd] = bicount;
07621     for (k = 0; k < nLoops; k++) {
07622         nodes[nd]->klow[k] = bicount;
07623     }
07624     bicount++;
07625     for (j = 0; j < nEdges; j++) {
07626         extlst[j] = False;
07627         intlst[j] = False;
07628     }
07629
07630     // go to children : nd --> ed --> td
07631     for (e = 0; e < nodes[nd]->deg; e++) {
07632         ed = V2Iedge(nodes[nd]->edges[e]);
07633
07634         // check this edge is already visited
07635         if (edges[ed]->edtype == GRCC_ED_Deleted) {
07636             // permanently deleted edge
07637             continue;
07638         } else if (edges[ed]->visited) {
07639             // already visited (backward visit)
07640             continue;
07641         }

```

```

07642     } else if (edges[ed]->cut) {
07643         // cut edge : treat as nd is an external
07644         (*opiext)++;
07645         nodes[nd]->setType(GRCC_ND_CPoint);
07646         continue;
07647     } else if (!isExternal(nd) && edges[ed]->ext) {
07648         // external
07649         edges[ed]->setType(GRCC_ED_Extern);
07650         edges[ed]->visited = True;
07651         edges[ed]->emom[ed] = 1;
07652         extlst[ed] = True;
07653         (*opiext)++;
07654         nodes[nd]->setType(GRCC_ND_CPoint);
07655         continue;
07656     }
07657
07658     // mark visited
07659     edges[ed]->visited = True;
07660
07661     // momentum is assigned on the backward move. (nd) 1 --> 0 (td)
07662     td = edges[ed]->nodes[0];
07663     dir = 1;
07664     if (td == nd) {
07665         td = edges[ed]->nodes[1];
07666         dir = -1;
07667     }
07668
07669     // biconnected component
07670     if (bidef[td] >= 0) {
07671         // a back edge is found. Already visited. Don't go further
07672         bilow[nd] = Min(bilow[nd], bilow[td]);
07673         edges[ed]->setType(GRCC_ED_Back);
07674         intlst[ed] = True;
07675         (*opiloop)++;
07676
07677         // create new loop momentum
07678         k = loopm++;
07679         nodes[nd]->klow[k] = Min(nodes[nd]->klow[k], nodes[td]->klow[k]);
07680         edges[ed]->setLMom(k, dir);
07681
07682         // self-loop
07683         if (td == nd) {
07684             nodes[nd]->setType(GRCC_ND_CPoint);
07685         }
07686     }
07687     } else {
07688         // not a back edge
07689         // go down further
07690         bisearchE(td, extlst1, intlst1, &opiext1, &opiloop1);
07691
07692         // the set of external particles
07693         for (j = 0; j < nEdges; j++) {
07694             extlst[j] = extlst[j] || extlst1[j];
07695         }
07696
07697         // loop momenta
07698         for (k = 0; k < nLoops; k++) {
07699             if (nodes[td]->klow[k] <= nodes[nd]->klow[k]) {
07700                 // inside loop 'k'
07701                 edges[ed]->setLMom(k, dir);
07702             }
07703             nodes[nd]->klow[k] = Min(nodes[nd]->klow[k], nodes[td]->klow[k]);
07704         }
07705
07706         // cut point ?
07707         if (bilow[td] >= bidef[nd]) {
07708             // a cut point is found
07709             if (nodes[nd]->ndtype == GRCC_ND_Undef) {
07710                 nodes[nd]->setType(GRCC_ND_CPoint);
07711 #ifndef CHECK
07712             } else if (nodes[nd]->ndtype != GRCC_ND_CPoint) {
07713                 if (prlevel > 0) {
07714                     fprintf(GRCC_Stderr, "bisearch: node %d is a cut point ",
07715                             nd);
07716                     fprintf(GRCC_Stderr, "(not undef %d)\n",
07717                             nodes[nd]->ndtype);
07718                 }
07719 #endif
07720             }
07721         } // cut point
07722
07723         // bridge ?
07724         if (bilow[td] > bidef[nd]) {
07725             // a bridge is found
07726             if (edges[ed]->edtype == GRCC_ED_Undef) {
07727                 edges[ed]->setType(GRCC_ED_Bridge);
07728                 nodes[td]->setType(GRCC_ND_CPoint);

```

```

07729 #ifdef CHECK
07730         } else if (edges[ed]->edtype != GRCC_ED_Bridge) {
07731             if (prlevel > 0) {
07732                 fprintf(GRCC_Stderr, "bisearch: edges %d is a bridge ", ed);
07733                 fprintf(GRCC_Stderr, "(not undef %d)\n", edges[ed]->edtype);
07734             }
07735 #endif
07736     }
07737
07738     if (!edges[ed]->ext) {
07739         // internal bridge
07740         opiextl++; // from bridge
07741         for (ie = 0; ie < nEdges; ie++) {
07742             if (intlstl[ie]) {
07743                 // OPI component No.
07744                 edges[ie]->opicomp = nopicomp;
07745                 intlstl[ie] = False;
07746             }
07747         }
07748         // 2pt OPI component
07749         if (opiextl == 2) {
07750             opi2plp = Max(opi2plp, opiloop1);
07751
07752             // the number of 2pt looped OPI components
07753             nopi2p++;
07754         }
07755         // the number of OPI components
07756         nopicomp++;
07757     }
07758     opiextl = 1; // from bridge
07759     opiloop1 = 0;
07760
07761 } else {
07762     // not a bridge
07763
07764     bilow[nd] = Min(bilow[nd], bilow[td]);
07765
07766     if (edges[ed]->edtype == GRCC_ED_Undef) {
07767         edges[ed]->setType(GRCC_ED_Inloop);
07768 #ifdef CHECK
07769     } else if (edges[ed]->edtype != GRCC_ED_Inloop) {
07770         if (prlevel > 0) {
07771             fprintf(GRCC_Stderr, "bisearch: ");
07772             fprintf(GRCC_Stderr, "edges %d is not undef (%d)\n",
07773                 ed, edges[ed]->edtype);
07774         }
07775 #endif
07776     }
07777     intlstl[ed] = True;
07778 }
07779
07780 // merge to the current variables
07781 for (ie = 0; ie < nEdges; ie++) {
07782     intlstl[ie] = intlstl[ie] || intlstl[ed];
07783 }
07784 (*opiext) += opiextl;
07785 (*opiloop) += opiloop1;
07786
07787 // linear combination of external momenta
07788 edges[ed]->setEMom(nEdges, extlstl, dir);
07789
07790 } // end of a child
07791 } // for (ed)
07792
07793 return;
07794 }
07795
07796 //-----
07797 void EGraph::extMomConsv(void)
07798 {
07799     int e, ex, lex, rs;
07800
07801     lex = -1;
07802     for (e = 0; e < nEdges; e++) {
07803         if (edges[e]->ext) {
07804             lex = e;
07805             extMom[e] = edges[e]->emom[e];
07806         } else {
07807             extMom[e] = 0;
07808         }
07809     }
07810     // eliminate momentum of the last external particle
07811     if (lex < 0) {
07812         return;
07813     }
07814     for (e = 0; e < nEdges; e++) {
07815         rs = edges[e]->emom[lex];

```

```

07816         if (rs != 0) {
07817             for (ex = 0; ex < nEdges; ex++) {
07818                 edges[e]->emom[ex] -= rs*extMom[ex];
07819             }
07820         }
07821     }
07822 }
07823
07824 //-----
07825 void EGraph::chkMomConsrv(void)
07826 {
07827     // check momentum conservation
07828
07829     int esum[GRCC_MAXEDGES];
07830     int lsum[GRCC_MAXNODES];
07831     Bool ok, okn;
07832     int n, ex, lk, ej, e, dir;
07833
07834     if (bicount < 1) {
07835         return;
07836     }
07837     ok = True;
07838     for (n = 0; n < nNodes; n++) {
07839         if (isExternal(n)) {
07840             continue;
07841         }
07842         for (ex = 0; ex < nEdges; ex++) {
07843             esum[ex] = 0;
07844         }
07845         for (lk = 0; lk < nLoops; lk++) {
07846             lsum[lk] = 0;
07847         }
07848         for (ej = 0; ej < nodes[n]->deg; ej++) {
07849             e = V2Iedge(nodes[n]->edges[ej]);
07850             if (edges[e]->nodes[0] == edges[e]->nodes[0]) {
07851                 continue;
07852             }
07853             dir = dirEdge(n, ej);
07854             for (ex = 0; ex < nEdges; ex++) {
07855                 if (edges[e]->ext) {
07856                     esum[ex] += dir*edges[e]->emom[ex];
07857                 }
07858             }
07859             for (lk = 0; lk < nLoops; lk++) {
07860                 lsum[lk] += dir*edges[e]->lmom[lk];
07861             }
07862         }
07863
07864         okn = True;
07865         for (ex = 0; ex < nEdges; ex++) {
07866             if (esum[ex] != 0) {
07867                 okn = False;
07868                 fprintf(GRCC_Stderr, "chkMomConsrv:n=%d, esum[%d]=%d\n",
07869                     n, ex, esum[ex]);
07870             }
07871         }
07872
07873         for (lk = 0; lk < nLoops; lk++) {
07874             if (lsum[lk] != 0) {
07875                 okn = False;
07876                 fprintf(GRCC_Stderr, "chkMomConsrv:n=%d, lsum[%d]=%d\n",
07877                     n, lk, lsum[lk]);
07878             }
07879         }
07880
07881         if (!okn) {
07882             ok = False;
07883             fprintf(GRCC_Stderr, "*** Violation of momentum conservation ");
07884             fprintf(GRCC_Stderr, "at node =%d\n",n);
07885         }
07886     }
07887
07888     if (!ok) {
07889         print();
07890         erEnd("inconsistent momentum");
07891     }
07892 }
07893
07894 //-----
07895 int EGraph::legParticle(int ed, int el)
07896 {
07897     // outgoing particle from (edge, leg) = (ed, el)
07898
07899     return model->normalParticle((2*el-1)*edges[ed]->ptcl);
07900 }
07901
07902

```

```

07903 //-----
07904 int EGraph::isFermion(int ed)
07905 {
07906     // return if particle on the edge ed follows Fermi statistics or not.
07907
07908     int ptcl, ptype;
07909
07910     ptcl = edges[ed]->ptcl;
07911     ptype = model->particles[Abs(ptcl)]->ptype;
07912
07913     return (ptype == GRCC_PT_Dirac || ptype == GRCC_PT_Majorana
07914            || ptype == GRCC_PT_Ghost);
07915 }
07916
07917 //-----
07918 int EGraph::fltrace(int fk, int nd0, int *fl)
07919 {
07920     // fk : kind of fermion
07921     //      = (GRCC_PT_Dirac, GRCC_PT_Majorana or GRCC_PT_Ghost)
07922     // nd0 : the last node visited
07923     // fl : list of signed edge on the fermion line.
07924     //      fl[j] :
07925     //      (V2Iedge(fl[j]), V2Ileg(fl[j])) is the next node
07926     //      fl[0] should be already defined
07927
07928     int nfl, k, i, nd, nl, e, ed, el, fgcnt, fkind, lk;
07929
07930     nfl = 1;
07931     // maximal possible length of a fline is nEdges
07932     for (k = 0; k < nEdges; k++) {
07933         if (k >= nfl) {
07934             printf("*** fltrace:illegal contorl: k=%d, nEdges=%d\n", k, nEdges);
07935             break;
07936         }
07937
07938         // get next node : nd0 ---- nd (nl)
07939         e = fl[k];
07940         ed = V2Iedge(e);
07941         el = V2Ileg(e);
07942 #ifdef CHECK
07943         if (ed > nEdges) {
07944             fprintf(stderr, "*** fltrace: ed=%d > nEdges=%d, fl=",
07945                    ed, nEdges);
07946             prIntArray(nNodes, fl, "\n");
07947             erEnd("fltrace: illegal fl");
07948         }
07949 #endif
07950         nd = edges[ed]->nodes[el];
07951         nl = edges[ed]->nlegs[el];
07952
07953         // end of the fline
07954         if (isExternal(nd) || nd == nd0) {
07955             fgcnt = 1;
07956             break;
07957         }
07958
07959         // find leg of nd for going next
07960         fgcnt = 0;
07961         ed = 0;
07962         lk = 0;
07963         for (i = 0; i < nodes[nd]->deg; i++) {
07964             e = nodes[nd]->edges[i];
07965             ed = V2Iedge(e);
07966             fkind = model->particles[Abs(edges[ed]->ptcl)]->ptype;
07967             // lk = 1 : (# of fkind particle) is even
07968             // lk = -1 : (# of fkind particle) is odd
07969             if (fkind == fk) {
07970                 if (lk == 1) {
07971                     lk = -1;
07972                 } else {
07973                     lk = 1;
07974                 }
07975             } else {
07976                 lk = 0;
07977             }
07978             if (!edges[ed]->visited) {
07979                 if (!isFermion(ed)) {
07980                     edges[ed]->visited = True;
07981                 } else {
07982                     if (fkind == fk) {
07983                         // i should be the neighbor of nl
07984                         // (nl, i) or (i, nl) should be a pair of fkind
07985                         // (nl, i) : lk = -1
07986                         // (i, nl) : lk = 1
07987                         if ((lk == 1 && nl == i+1) || (lk == -1 && nl == i-1)) {
07988                             edges[ed]->visited = True;
07989                             fgcnt++;

```

```

07990                                     if (fgcnt == 1) {
07991                                         // -e = (signed edge points the next node)
07992                                         fl[nfl++] = - e;
07993                                         break;
07994                                     }
07995                                 }
07996                             }
07997                         } // not visited
07998                     } // end of for k
07999                 }
08000                 if (fgcnt == 0) {
08001                     printf("*** fline: Fermion number is not conserved\n");
08002                     printf("    nd=%d, e=%d, ed=%d, fgcnt=%d\n",
08003                           nd, e, ed, fgcnt);
08004                     // erEnd("fline: Fermion number is not conserved");
08005                 } else if (fgcnt > 1) {
08006                     printf("+++ fline: more than two fermions: check fsign\n");
08007                     printf("    nd=%d, e=%d, ed=%d, fgcnt=%d\n",
08008                           nd, e, ed, fgcnt);
08009                 }
08010             }
08011             if (k >= nEdges || k >= nfl) {
08012                 printf("*** fline: illegal control\n");
08013                 printf("    nEdges=%d, nfl=%d, k=%d, ", nEdges, nfl, k);
08014                 prIntArray(nfl, fl, "\n");
08015                 erEnd("fline: illegal control");
08016             }
08017             return nfl;
08018         }
08019
08020 //-----
08021 void EGraph::getFLines(void)
08022 {
08023     int fl[GRCC_MAXNODES];
08024     int nextn, exto[GRCC_MAXNODES];
08025     int e, ed, nd, floop, nswap, nfl, fkind, el, ptcl;
08026
08027     nFlines = 0;
08028     for (ed = 0; ed < nEdges; ed++) {
08029         edges[ed]->visited = False;
08030     }
08031
08032     nextn = 0;
08033     for (ed = 0; ed < nEdges; ed++) {
08034         if (edges[ed]->visited) {
08035             continue;
08036         }
08037         if (!edges[ed]->ext) {
08038             continue;
08039         }
08040         el = 0;
08041         nd = edges[ed]->nodes[el];
08042         if (!isExternal(nd)) {
08043             el = 1;
08044             nd = edges[ed]->nodes[el];
08045             if (!isExternal(nd)) {
08046                 erEnd("*** illegal control");
08047             }
08048         }
08049         if (!isFermion(ed)) {
08050             continue;
08051         }
08052         ptcl = legParticle(ed, 1-el);
08053         if (ptcl < 0) {
08054             continue;
08055         }
08056
08057         //      el   ed   el1
08058         //      x-----x      e = (signed edge of (ed, el1))
08059         //      nd   ptcl(>= 0)
08060         //      external
08061
08062         fl[0] = - I2Vedge(ed, el);
08063         nfl = 1;
08064         fkind = model->particles[Abs(edges[ed]->ptcl)]->ptype;
08065         edges[ed]->visited = True;
08066
08067         nfl = fltrace(fkind, nd, fl);
08068         addFLine(FL_Open, fkind, nfl, fl);
08069         e = fl[nfl-1];
08070         exto[nextn++] = edges[V2Iedge(e)]->nodes[V2Ileg(e)];
08071     }
08072
08073     // closed Fermion line
08074     floop = 0;
08075     for (ed = 0; ed < nEdges; ed++) {
08076         if (edges[ed]->visited) {

```



```

08077         continue;
08078     }
08079     if (!isFermion(ed)) {
08080         continue;
08081     }
08082     el = 0;
08083     ptcl = legParticle(ed, 1-el);
08084     if (ptcl < 0) {
08085         el = 1;
08086     }
08087     nd = edges[ed]->nodes[el];
08088
08089     //      el      ed      el1
08090     //      x-----<-----x      e = (signed edge of (ed, el1))
08091     //      nd      ptcl
08092
08093     fl[0] = - I2Vedge(ed, el);
08094     nfl = 1;
08095     edges[ed]->visited = True;
08096
08097     fkind = model->particles[Abs(edges[ed]->ptcl)]->ptype;
08098     nfl = fltrace(fkind, nd, fl);
08099     addFLine(FL_Closed, fkind, nfl, fl);
08100     floop++;
08101 }
08102 if (nextn > 0) {
08103     nswap = sortb(nextn, exto);
08104 } else {
08105     nswap = 0;
08106 }
08107 if ((floop+nswap) % 2 == 0) {
08108     fsign = 1;
08109 } else {
08110     fsign = -1;
08111 }
08112 }
08113
08114 //-----
08115 void EGraph::addFLine(const FLType ft, int fk, int nfl, int *fl)
08116 {
08117     int j;
08118
08119     if (nFlines >= GRCC_MAXFLINES) {
08120         erEnd("too many Fermion lines (GRCC_MAXEDGES)");
08121     }
08122     if (flines[nFlines] == NULL) {
08123         flines[nFlines] = new EFLine();
08124     }
08125     flines[nFlines]->ftype = ft;
08126     flines[nFlines]->fkind = fk;
08127     flines[nFlines]->nlist = nfl;
08128     for (j = 0; j < nfl; j++) {
08129         flines[nFlines]->elist[j] = fl[j];
08130     }
08131     nFlines++;
08132 }
08133
08134 //*****
08135 // assign.cc
08136 //=====
08137 // Assign particles to the edges and interactions to nodes.
08138 // Completed graph data is saved in the form of EGraph.
08139
08140 // method : selection of assignable node
08141
08142 //=====
08143 // class NCand
08144 NCand::NCand(const NCandSt sta, const int dega, const int nilst, int *ilst)
08145 {
08146     // candidate list of interactions attached to a vertex.
08147
08148     int j;
08149
08150     deg = dega;
08151     st = sta;
08152     nilist = nilst;
08153     for (j = 0; j < nilist; j++) {
08154         ilist[j] = ilst[j];
08155     }
08156
08157 #ifdef CHECK
08158     if (st == AS_Assigned) {
08159         if (nilist != 1) {
08160             erEnd("illegal assignment");
08161         }
08162     } else if (st == AS_AssExt) {

```

```

08164         if (nilist != 1) {
08165             erEnd("illegal assignment");
08166         }
08167     }
08168 #endif
08169 }
08170
08171 //-----
08172 NCand::~NCand(void)
08173 {
08174 }
08175
08176 //-----
08177 void NCand::prNCand(const char* msg)
08178 {
08179     printf("%d %d ", st, deg);
08180     prIntArray(nilist, ilist, msg);
08181 }
08182
08183 //=====
08184 // class ECand
08185 ECand::ECand(int dt, int nplst, int *plst)
08186 {
08187     int j;
08188
08189     det = dt;
08190     nplist = nplst;
08191     for (j = 0; j < nplist; j++) {
08192         plist[j] = plst[j];
08193     }
08194
08195     if (det && nplist != 1) {
08196         if (prlevel > 0) {
08197             fprintf(stderr, "*** ECand : len(plist) != 1 : det=%d ", det);
08198             prIntArrayErr(nplist, plist, "\n");
08199         }
08200         erEnd("ECand : len(plist) != 1");
08201     }
08202 }
08203
08204 //-----
08205 ECand::~ECand(void)
08206 {
08207 }
08208
08209 //-----
08210 void ECand::prECand(const char *msg)
08211 {
08212     prIntArray(nplist, plist, "");
08213     printf(" (det=%d)%s", det, msg);
08214 }
08215
08216 //=====
08217 // class ANode
08218 ANode::ANode(int dg)
08219 {
08220     int j;
08221
08222     deg = dg;
08223     nlegs = 0;
08224     anodes = new int[deg];
08225     aedges = new int[deg];
08226     aelegs = new int[deg];
08227     cand = NULL;
08228     for (j = 0; j < deg; j++) {
08229         anodes[j] = -1;
08230         aedges[j] = -1;
08231         aelegs[j] = -1;
08232     }
08233 }
08234
08235 //-----
08236 ANode::~ANode(void)
08237 {
08238     if (cand != NULL) {
08239         delete cand;
08240         cand = NULL;
08241     }
08242     if (aelegs != NULL) {
08243         delete[] aelegs;
08244         delete[] aedges;
08245         delete[] anodes;
08246         aelegs = NULL;
08247         aedges = NULL;
08248         anodes = NULL;
08249     }
08250 }

```

```

08251
08252 //-----
08253 int ANode::newleg(void)
08254 {
08255     // add a slot for a leg
08256
08257     int lg = nlegs;
08258
08259     nlegs++;
08260 #ifdef CHECK
08261     if (nlegs > deg) {
08262         fprintf(GRCC_Stderr, "*** ANode::newleg : nlegs = %d > deg = %d\n",
08263             nlegs, deg);
08264         erEnd("ANode::newleg : nlegs > deg");
08265     }
08266 #endif
08267     return lg;
08268 }
08269
08270
08271 //=====
08272 // class AEdge
08273 AEdge::AEdge(int n0, int l0, int n1, int l1)
08274 {
08275     nodes[0] = n0;        // node of 0 side of the edge
08276     nodes[1] = n1;        // node of 1 side of the edge
08277     nlegs[0] = l0;        // leg of the node of 0 side of the edge
08278     nlegs[1] = l1;        // leg of the node of 1 side of the edge
08279     ptcl = GRCC_PT_Undef; // particle defined in the model
08280     cand = NULL;          // candidate
08281 }
08282
08283 //-----
08284 AEdge::~AEdge(void)
08285 {
08286     if (cand != NULL) {
08287         delete cand;
08288     }
08289 }
08290
08291 //=====
08292 // class Assign
08293 Assign::Assign(SProcess *sprc, MGraph *mgr, PNodeClass *pnc)
08294 {
08295     Bool ok;
08296     int j;
08297
08298     if (sprc == NULL) {
08299         erEnd("Assign: sprc == NULL");
08300     }
08301
08302     // pointers to related objects
08303     sprc = sprc;
08304     model = sprc->model;
08305     opt = sprc->opt;
08306     mgr = mgr;
08307     pnc = pnc;
08308
08309     egraph = mgr->egraph;
08310     if (egraph == NULL) {
08311         erEnd("Assign: egraph == NULL");
08312     }
08313
08314     astack = sprc->astack;
08315     if (astack == NULL) {
08316         erEnd("Assign: astack == NULL");
08317     }
08318
08319     nNodes = mgr->nNodes;
08320     nEdges = mgr->nEdges;
08321     nExtern = sprc->nExtern;
08322     nETotal = 0; // total number of edges
08323
08324     // counters of graphs
08325     nAGraphs = 0;
08326     wAGraphs = Fraction(0,1);
08327     nAOPI = 0;
08328     wAOPI = Fraction(0,1);
08329
08330     nodes = new ANode*[nNodes];
08331     edges = new AEdge*[nEdges];
08332
08333     for (j = 0; j < nNodes; j++) {
08334         nodes[j] = NULL;
08335     }
08336     for (j = 0; j < nEdges; j++) {
08337         edges[j] = NULL;

```

```

08338     }
08339     for (j = 0; j < model->ncouple; j++) {
08340         cplleft[j] = sproc->clist[j];
08341     }
08342
08343     // initialize astack
08344     astack->setAGraph(this);
08345     astack->checkPoint(checkpoint0);
08346
08347     // import from mgraph
08348     ok = fromMGraph();
08349 #ifdef CHECK
08350     checkAG("Assign::Assign");
08351 #endif
08352
08353     if (ok) {
08354         // start assignment
08355         assignAllVertices();
08356     } else {
08357         // cannot assign
08358     }
08359
08360     // restore from the stack
08361 #ifdef CHECK
08362     astack->restoreMsg(checkpoint0, "Assign");
08363 #else
08364     astack->restore(checkpoint0);
08365 #endif
08366 }
08367
08368 //=====
08369 Assign::~Assign(void)
08370 {
08371     int j;
08372
08373     for (j = 0; j < nEdges; j++) {
08374         delete edges[j];
08375         edges[j] = NULL;
08376     }
08377     delete[] edges;
08378     edges = NULL;
08379
08380     for (j = 0; j < nNodes; j++) {
08381         delete nodes[j];
08382         nodes[j] = NULL;
08383     }
08384     delete[] nodes;
08385     nodes = NULL;
08386 }
08387
08388 //-----
08389 void Assign::prCand(const char *msg)
08390 {
08391     // Print candidate table
08392     int n, e, ne;
08393     AEdge *ed;
08394
08395     printf("\n");
08396     printf("+++ Candidate list: %s\n", msg);
08397     printf(" Nodes %d\n", nNodes);
08398     for (n = 0; n < nNodes; n++) {
08399         printf("%d: edges=", n);
08400         prIntArray(nodes[n]->deg, nodes[n]->aedges, ": cand=");
08401         if (nodes[n]->cand == NULL) {
08402             printf("NULL\n");
08403         } else {
08404             nodes[n]->cand->prNCand("\n");
08405         }
08406     }
08407     ne = Min(nEdges, nETotal);
08408     printf(" Edges %d\n", ne);
08409     for (e = 0; e < ne; e++) {
08410         ed = edges[e];
08411         if (ed == NULL) {
08412             printf("NULL_Edge\n");
08413         } else {
08414             printf("%d: %d->%d: cand=", e, ed->nodes[0], ed->nodes[1]);
08415             if (edges[e]->cand == NULL) {
08416                 printf("NULL\n");
08417             } else {
08418                 edges[e]->cand->prECand("\n");
08419             }
08420         }
08421     }
08422 }
08423
08424 //=====

```

```

08425 void Assign::checkAG(const char *msg)
08426 {
08427     int n, lg;
08428     Bool ok = True;
08429
08430     for (n = 0; n < nNodes; n++) {
08431         for (lg = 0; lg < nodes[n]->deg; lg++) {
08432             if (nodes[n]->aedges[lg] < 0) {
08433                 printf("*** checkAG:%s: n=%d, lg=%d, aedges=%d\n",
08434                     msg, n, lg, nodes[n]->aedges[lg]);
08435                 ok = False;
08436             }
08437         }
08438     }
08439     if (!ok) {
08440         prCand("checkAG");
08441         erEnd("checkAG: failed");
08442     }
08443 }
08444
08445 //=====
08446 // control of the process of particle/interaction assignment
08447
08448 //-----
08449 Bool Assign::assignAllVertices(void)
08450 {
08451     // Entry point of the assignment procedure
08452     Bool ok;
08453
08454     #ifdef CHECK
08455         checkCand("assignAllVertices:1");
08456     #endif
08457
08458     // start main part
08459     #ifdef SIMPSEL
08460         ok = selectVertexSimp(-1);
08461     #else
08462         ok = selectVertex();
08463     #endif
08464
08465     #ifdef CHECK
08466         checkCand("assignAllVertices:2");
08467     #endif
08468
08469     return ok;
08470 }
08471
08472 //-----
08473 Bool Assign::selectVertexSimp(int lastv)
08474 {
08475     // Select a vertex for assignment of particles to legs
08476     //
08477     // Argument
08478     // lastv : previously assigned vertex; Nothing when lastv<0.
08479
08480     Bool ok;
08481     int v;
08482
08483     #ifdef CHECK
08484         checkCand("selectVertexSimp");
08485     #endif
08486
08487     // find a vertex to which interaction is assigned
08488     v = selUnAssVertexSimp(lastv);
08489
08490     // no more vertex
08491     if (v < 0) {
08492
08493         ok = allAssigned();
08494         if (ok) {
08495             if (!egraph->optQGrafA(opt)) {
08496                 return False;
08497             }
08498             // egraph->biconnE(); // necessary ???
08499             opt->newAGraph(egraph);
08500         }
08501
08502         return ok;
08503     }
08504
08505     // select a leg and assign a particle to it
08506     ok = selectLeg(v, -1);
08507
08508     return ok;
08509 }
08510
08511 //-----

```

```

08512 Bool Assign::selectVertex(void)
08513 {
08514     // Select a vertex for assignment of particles to legs
08515     //
08516     // Argument
08517     // lastv : previously assigned vertex; Nothing when lastv<0.
08518
08519     Bool ok;
08520     int v;
08521
08522 #ifdef CHECK
08523     checkCand("selectVertex");
08524 #endif
08525
08526     // find a vertex to which interaction is assigned
08527     v = selUnAssVertex();
08528
08529     // no more vertex
08530     if (v < 0) {
08531
08532         ok = allAssigned();
08533         if (ok) {
08534             if (!egraph->optQGrafA(opt)) {
08535                 return False;
08536             }
08537             egraph->biconnE();
08538             opt->newAGraph(egraph);
08539         }
08540
08541         return ok;
08542     }
08543
08544     // select a leg and assign a particle to it
08545     ok = selectLeg(v, -1);
08546
08547     return ok;
08548 }
08549
08550 //-----
08551 Bool Assign::selectLeg(int v, int lastlg)
08552 {
08553     // Select a leg of vertex 'v' for assignment of particle,
08554     // where the last assigned leg was 'lastlg'.
08555
08556     int pt, ln, j;
08557     Bool ok;
08558     CheckPt sav, sav0;
08559     int nplist, plist[GRCC_MAXMPARTICLES2];
08560
08561 #ifdef CHECK
08562     checkNode(v, "selectLeg:0");
08563     checkCand("selectLeg");
08564 #endif
08565
08566     // find a leg to be assigned
08567     ln = selUnAssLeg(v, lastlg);
08568
08569     // no more assignable leg for the current node
08570     if (ln < 0) {
08571         // move to next vertex
08572         ok = assignVertex(v);
08573
08574         return ok;
08575     }
08576
08577     // make the list of possible particles, incoming to the vertex
08578     astack->checkPoint(sav0);
08579     nplist = candPart(v, ln, plist, GRCC_MAXMPARTICLES2);
08580
08581     // no candidate
08582     if (nplist < 1) {
08583         return False;
08584     }
08585
08586     // assign each of possible particle to the leg 'lg'.
08587     astack->checkPoint(sav);
08588     for (j = 0; j < nplist; j++) {
08589         pt = plist[j];
08590
08591         // try to assign 'pt' to (v, ln)
08592         if(assignPLeg(v, ln, pt)) {
08593             // move to next leg
08594             selectLeg(v, ln);
08595         }
08596     }
08597 #ifdef CHECK
08598     astack->restoreMsg(sav, "selectLeg2");

```

```

08599 #else
08600     astack->restore(sav);
08601 #endif
08602 }
08603
08604 #ifdef CHECK
08605     astack->restoreMsg(sav0, "selectLeg2");
08606 #else
08607     astack->restore(sav0);
08608 #endif
08609     return True;
08610 }
08611
08612 //-----
08613 void Assign::saveCouple(int *sav)
08614 {
08615     int j;
08616
08617     if (model->ncouple > 1) {
08618         for (j = 0; j < model->ncouple; j++) {
08619             sav[j] = cplleft[j];
08620         }
08621     }
08622 }
08623
08624 //-----
08625 void Assign::restoreCouple(int *sav)
08626 {
08627     int j;
08628
08629     if (model->ncouple > 1) {
08630         for (j = 0; j < model->ncouple; j++) {
08631             cplleft[j] = sav[j];
08632         }
08633     }
08634 }
08635
08636 //-----
08637 Bool Assign::subCouple(int *cpl)
08638 {
08639     int j;
08640
08641     if (model->ncouple > 1) {
08642         for (j = 0; j < model->ncouple; j++) {
08643             cplleft[j] -= cpl[j];
08644             if (cplleft[j] < 0) {
08645                 return False;
08646             }
08647         }
08648     }
08649     return True;
08650 }
08651
08652 //-----
08653 Bool Assign::assignVertex(int v)
08654 {
08655     // Assign interactions to vertex 'v'
08656
08657     Bool done, ok;
08658     CheckPt sav, sav1;
08659     NCand *nc;
08660     int ia, n, j, cl;
08661     NCandSt vst;
08662     Bool ok1;
08663     int savc0[GRCC_MAXNCPLG], savc1[GRCC_MAXNCPLG];
08664
08665     #ifdef CHECK
08666         checkCand("assignVertex");
08667     #endif
08668
08669     // save the configuration
08670     astack->checkPoint(sav);
08671     saveCouple(savc0);
08672
08673     // assign to all vertices with only one candidate
08674     done = False;
08675     for (n = 0; n < nNodes; n++) {
08676         // check if vertex
08677         cl = pnclass->nd2cl[n];
08678         if (!isATEternal(pnclass->type[cl])) {
08679             nc = nodes[n]->cand;
08680             if (nc->st == AS_UnAssLegs && nc->nilist == 1) {
08681                 // bind interaction to the vertex
08682                 ia = nc->ilist[0];
08683             }
08684         }
08685     }

```

```

08686         vst = assignIVertex(n, ia);
08687         if (vst == AS_Impossible) {
08688             // discard the current configuration
08689 #ifdef CHECK
08690             astack->restoreMsg(sav, "assignVertex");
08691 #else
08692             astack->restore(sav);
08693 #endif
08694             restoreCouple(savc0);
08695             return False;
08696         } else if (vst == AS_Assigned) {
08697             if (!subCouple(model->interacts[ia]->clist)) {
08698 #ifdef CHECK
08699                 astack->restoreMsg(sav, "assignVertex");
08700 #else
08701                 astack->restore(sav);
08702 #endif
08703                 restoreCouple(savc0);
08704                 return False;
08705             }
08706         }
08707         if (n == v) {
08708             done = (vst == AS_Assigned);
08709         }
08710     }
08711 }
08712 }
08713 }
08714 // uniquely determined
08715 ok = True;
08716 if (done) {
08717     // move to the next vertex
08718 #ifdef SIMPSEL
08719     ok = selectVertexSimp(v);
08720 #else
08721     ok = selectVertex();
08722 #endif
08723 }
08724 #ifdef CHECK
08725 astack->restoreMsg(sav, "assignVertex");
08726 #else
08727 astack->restore(sav);
08728 #endif
08729 restoreCouple(savc0);
08730 return ok;
08731 }
08732 // there are still several possibilities.
08733 astack->checkPoint(sav1);
08734 saveCouple(savc1);
08735 for (j = 0; j < nodes[v]->cand->nilist; j++) {
08736     ia = nodes[v]->cand->ilist[j];
08737     // bind interaction to the vertex
08738     ok1 = True;
08739     vst = assignIVertex(v, ia);
08740     if (vst == AS_Assigned) {
08741         ok1 = subCouple(model->interacts[ia]->clist);
08742     }
08743     if (ok1 && (vst == AS_Assigned || vst == AS_Assigned0)) {
08744         // move to the next vertex
08745 #ifdef SIMPSEL
08746         ok = selectVertexSimp(v);
08747 #else
08748         ok = selectVertex();
08749 #endif
08750     }
08751 #ifdef CHECK
08752 astack->restoreMsg(sav1, "assignVertex");
08753 #else
08754 astack->restore(sav1);
08755 #endif
08756 restoreCouple(savc1);
08757 }
08758 #ifdef CHECK
08759 astack->restoreMsg(sav, "assignVertex");
08760 #else
08761 astack->restore(sav);
08762 #endif
08763 restoreCouple(savc0);
08764 return ok;

```



```

08773 }
08774
08775 //-----
08776 Bool Assign::allAssigned(void)
08777 {
08778     // Assignment of particles and interactions is finished.
08779     // Check isomorphism etc. and count symmetry factor
08780     // The sign from Fermi statistics is calculated in fillEGraph
08781
08782     BigInt nsym, esym, nsym1;
08783     MNodeClass *cl;
08784     Bool ok = True;
08785 #ifdef OPTEXTONLY
08786 #else
08787     Bool ext;
08788     int e, p;
08789 #endif
08790
08791 #ifdef CHECK
08792     checkCand("allAssigned");
08793 #endif
08794
08795     // check order of coupling constants
08796 #ifdef CHECK
08797     if (!checkOrderCpl()) {
08798         erEnd("allAssigned: checkOrderCpl = False");
08799     }
08800 #endif
08801
08802     // check duplication by violating ordering condition
08803     if (!isOrdLegs()) {
08804         return False;
08805     }
08806
08807     // classification of nodes
08808     cl = mgraph->curcl;
08809
08810     // check isomorphism and calculate sfactor
08811     nsym = 0;
08812     esym = 0;
08813
08814     ok = isIsomorphic(cl, &nsym, &esym, &nsym1);
08815     if (!ok || nsym < 1 || esym < 1) {
08816         return False;
08817     }
08818
08819     //-----
08820     // Now we got a new agraph.
08821
08822     // Update counters
08823     nAGraphs++;
08824     wAGraphs.add(1, nsym*esym);
08825     if (mgraph->opi) {
08826         nAOPI++;
08827         wAOPI.add(1, nsym*esym);
08828     }
08829
08830 #ifdef CHECK
08831     checkAG("allAssigned");
08832 #endif
08833     // fill information to resulting Egraph
08834     fillEGraph(nAGraphs, nsym, esym, nsym1);
08835
08836 #ifdef OPTEXTONLY
08837 #else
08838     // check extonly particles
08839     for (e = 0; e < nEdges; e++) {
08840         p = Abs(egraph->edges[e]->ptcl);
08841         ext = egraph->edges[e]->ext;
08842         if (!ext) {
08843             if (model->particles[p]->extonly) {
08844                 return False;
08845             }
08846         }
08847     }
08848 #endif
08849
08850     return True;
08851 }
08852
08853 //=====
08854 // Interface to MGraph and EGraph
08855 //-----
08856 Bool Assign::fromMGraph(void)
08857 {
08858     // Import from MGraph
08859

```

```

08860     int      npall, *pall;
08861     int      np[1];
08862     Bool     ok;
08863     int      j, k, n, nn, nl, deg, nc, ptcl, cl, typ, mcl, cll, typ1;
08864     int      lcn, ia;
08865     int      nilist, ilst[GRCC_MAXMINTERACT];
08866     NCandSt  st;
08867
08868     // create ANodes
08869     for (j = 0; j < nNodes; j++) {
08870         nodes[j] = new ANode(mgraph->nodes[j]->deg);
08871     }
08872
08873     // initialization of edge table
08874     nETotal = 0;
08875
08876     // List of all particles
08877     pall = model->allParticles(&npall);
08878
08879     // add nodes
08880     for (n = 0; n < mgraph->nNodes; n++) {
08881         cl = pnclass->nd2cl[n];
08882         typ = pnclass->type[cl];
08883
08884         // external particle
08885         if (isATEXternal(typ)) {
08886
08887 #ifdef CHECK
08888             if (mgraph->nodes[n]->deg != 1) {
08889                 printf("*** assign:fromMGraph : "
08890                        "external but deg[%d] = %d != 1, type=%d\n",
08891                        n, mgraph->nodes[n]->deg, typ);
08892                 mgraph->print();
08893                 erEnd("assign:fromMGraph : illegal external particle");
08894             }
08895 #endif
08896             np[0] = pnclass->particle[cl];
08897             nodes[n]->cand = new NCand(AS_AssExt, 1, 1, np);
08898             for (nl = 0; nl < mgraph->nNodes; nl++) {
08899                 nc = mgraph->adjMat[n][nl];
08900                 for (k = 0; k < nc; k++) {
08901                     addEdge(n, nl, 1, np);
08902                 }
08903             }
08904
08905             // vertex
08906         } else {
08907
08908             // candidates of vertices
08909             deg = mgraph->nodes[n]->deg;
08910             st = AS_UnAssLegs;
08911             cl = sproc->pnclass->nd2cl[n]; // class in the process
08912             mcl = sproc->pnclass->cl2mcl[cl]; // class in the model
08913
08914             if (nodes[n]->cand != NULL) {
08915                 delete nodes[n]->cand;
08916             }
08917             lcn = model->ncouple;
08918
08919             // multiple coupling constants are defined in the model.
08920             if (lcn > 1) {
08921                 nilist = 0;
08922                 for (j = 0; j < model->cplgnvl[mcl]; j++) {
08923                     ia = model->cplgv1[mcl][j];
08924
08925                     // select by coupling constants
08926                     if (legArray(lcn, model->interacts[ia]->clist, cplleft)) {
08927                         ilst[nilist++] = ia;
08928                     }
08929                 }
08930                 nodes[n]->cand = new NCand(st, deg, nilist, ilst);
08931
08932             // there is only one coupling constant
08933             } else {
08934                 nodes[n]->cand =
08935                     new NCand(st, deg, model->cplgnvl[mcl], model->cplgv1[mcl]);
08936             }
08937
08938             // vertices
08939             for (nl = n; nl < mgraph->nNodes; nl++) {
08940                 cll = pnclass->nd2cl[nl];
08941                 typ1 = pnclass->type[cll];
08942                 if (!isATEXternal(typ1)) {
08943                     nc = mgraph->adjMat[n][nl];
08944                     if (n == nl) {
08945                         nc = nc/2;
08946                     }

```

```

08947         for (k = 0; k < nc; k++) {
08948             addEdge(n, n1, npall, pall);
08949         }
08950     }
08951 }
08952 }
08953 }
08954 #ifdef CHECK
08955     if (nETotal != nEdges) {
08956         printf("*** Assign::fromMGraph nETotal=%d != nEdges=%d\n",
08957             nETotal, nEdges);
08958         erEnd("Assign::fromMGraph nETotal= != nEdges");
08959     }
08960 #endif
08961
08962     // assign particle of an edge next to an external particle
08963     for (n = 0; n < mgraph->nNodes; n++) {
08964         cl = pnclass->nd2cl[n];
08965         typ = pnclass->type[cl];
08966         if (isATExternal(typ)) {
08967
08968             cl = pnclass->nd2cl[n];
08969             ptcl = pnclass->particle[cl];
08970
08971             // particle ptcl flows in to the node and
08972             // particle (- ptcl) flows in from the edge.
08973
08974             #ifdef CHECK
08975                 if (ptcl == 0) {
08976                     erEnd("fromMGraph: ptcl=0");
08977                 }
08978             #endif
08979             ok = assignPLeg(n, 0, -ptcl);
08980             if (!ok) {
08981                 // impossible config
08982                 return False;
08983             }
08984             nn = nodes[n]->anodes[0];
08985             ok = updateCandNode(nn);
08986             if (!ok) {
08987                 // impossible config
08988                 return False;
08989             }
08990         }
08991     }
08992
08993     #ifdef CHECK
08994         checkCand("fromMGraph");
08995         checkAG("fromMGraph");
08996     #endif
08997     return True;
08998 }
09000
09001 //-----
09002 void Assign::addEdge(int n0, int n1, int nplist, int *plist)
09003 {
09004     // add an edge and set connection information
09005     // n0 -- (new edge) -- n1, with candidates 'plist'
09006
09007     int lg0, lg1, eid;
09008     AEdge *aed;
09009
09010     #ifdef CHECK
09011         if (n0 >= nNodes || n1 >= nNodes) {
09012             printf("*** Assign::addEdge : undefined nodes %d: [%d, %d]",
09013                 nETotal, n0, n1);
09014             erEnd("Assign::addEdge : undefined nodes");
09015         }
09016     #endif
09017
09018     // legs to be connected
09019     lg0 = nodes[n0]->newleg();
09020     lg1 = nodes[n1]->newleg();
09021
09022     // create edge
09023     #ifdef CHECK
09024         if (nETotal >= nEdges) {
09025             erEnd("too many edges");
09026         }
09027     #endif
09028
09029     aed = new AEdge(n0, lg0, n1, lg1);
09030     aed->cand = new ECand(False, nplist, plist);
09031
09032     #ifdef CHECK
09033         if (edges[nETotal] != NULL) {

```

```

09034         erEnd("edges[nETotal] != NULL");
09035     }
09036 #endif
09037
09038     // register to the edge table
09039     eid = nETotal;
09040     edges[nETotal++] = aed;
09041
09042     // connect edge and nodes
09043     connect(n0, lg0, eid, 0, n1, lg1);
09044 }
09045
09046 //-----
09047 void Assign::connect(int n0, int l0, int eg, int el, int n1, int l1)
09048 {
09049     // Connect (n0, l0) -- (eg, el) -- (n1)
09050
09051     ANode *nd0, *nd1;
09052     AEdge *ed;
09053     int    eo;
09054
09055     nd0 = nodes[n0];
09056     nd1 = nodes[n1];
09057     ed  = edges[eg];
09058     eo  = 1 - el;
09059
09060     nd0->anodes[l0] = n1;
09061     nd0->aedges[l0] = eg;
09062     nd0->aelegs[l0] = el;
09063
09064     nd1->anodes[l1] = n0;
09065     nd1->aedges[l1] = eg;
09066     nd1->aelegs[l1] = eo;
09067
09068     ed->nodes[el] = n0;
09069     ed->nlegs[el] = l0;
09070
09071     ed->nodes[eo] = n1;
09072     ed->nlegs[eo] = l1;
09073 }
09074
09075 //-----
09076 Bool Assign::fillEGraph(int aid, BigInt nsym, BigInt esym, BigInt nsym1)
09077 {
09078     // Set variables of egraph with the result of particle assignment
09079     // Adjust the ordering of legs of vertices in a consistent way
09080     // with the interaction defined in the model.
09081
09082     ANode *an;
09083     ENode *en;
09084     int    work[3][GRCC_MAXLEGS];
09085     int    n, lr, e;
09086     int    *elist;
09087     int    lg, ed, eg;
09088 #ifdef CHECK
09089     int    cl, ok = True;
09090 #endif
09091
09092     egraph->assigned = True;
09093
09094     egraph->aId      = aid;
09095     egraph->nsym     = nsym;
09096     egraph->esym     = esym;
09097     egraph->bicount  = -1;
09098     if (sproc != NULL) {
09099         egraph->extperm = sproc->extperm;
09100     } else {
09101         egraph->extperm = 1;
09102     }
09103     egraph->nsym1 = nsym1;
09104     egraph->multp = (egraph->extperm * egraph->nsym1) / egraph->nsym;
09105
09106 #ifdef CHECK
09107     checkAG("fillEGraph:0");
09108 #endif
09109     // external node
09110     for (n = 0; n < nNodes; n++) {
09111         // vertices
09112 #ifdef CHECK
09113         cl = pnclass->nd2cl[n];
09114         if (isATEXternal(pnclass->type[cl])) {
09115             ;
09116         } else if (nodes[n]->cand->st != AS_Assigned) {
09117             printf("*** fillEGraph : node %d is not assigned", n);
09118             prCand("fillEGraph: node");
09119             erEnd("fillEGraph : node is not assigned");
09120         }

```

```

09121 #endif
09122
09123     an = nodes[n];
09124     en = egraph->nodes[n];
09125
09126     en->initAss(egraph, n, an->deg);
09127
09128     en->intrct = an->cand->ilist[0];
09129     elist = reordLeg(n, work[0], work[1], work[2]);
09130     for (lr = 0; lr < nodes[n]->deg; lr++) {
09131         if (elist == NULL) {
09132             lg = lr;
09133         } else {
09134             lg = elist[lr];
09135         }
09136 #ifdef CHECK
09137         if (lg < 0 || lg >= nodes[n]->deg) {
09138             printf("*** fillEGraph: n=%d, lr=%d: 0 <= lg=%d < %d\n",
09139                 n, lr, lg, nodes[n]->deg);
09140             erEnd("fillEGraph: illegal reordering");
09141         }
09142 #endif
09143         ed = an->aedges[lg];
09144         eg = an->aelegs[lg];
09145
09146         en->edges[lr] = I2Vedge(ed, 2*eg-1);
09147
09148         egraph->edges[ed]->nodes[eg] = n;
09149         egraph->edges[ed]->nlegs[eg] = lr;
09150     }
09151 }
09152 // edges
09153 for (e = 0; e < nEdges; e++) {
09154 #ifdef CHECK
09155     if (edges[e]->cand->nplist != 1) {
09156         printf("*** fillEGraph : edge %d is not assigned", e);
09157         prCand("fillEGraph: edge");
09158         erEnd("fillEGraph : edge is not assigned");
09159     }
09160 #endif
09161     egraph->edges[e]->ptcl = edges[e]->cand->plist[0];
09162 }
09163 #ifdef EDGEORDER
09164 for (e = 0; e < nEdges; e++) {
09165     if (egraph->edges[e]->ptcl < 0) {
09166         egraph->edges[e]->ptcl = - edges[e]->cand->plist[0];
09167         n = egraph->edges[e]->nodes[0];
09168         lr = egraph->edges[e]->nlegs[0];
09169         egraph->edges[e]->nodes[0] = egraph->edges[e]->nodes[1];
09170         egraph->edges[e]->nlegs[0] = egraph->edges[e]->nlegs[1];
09171         egraph->edges[e]->nodes[1] = n;
09172         egraph->edges[e]->nlegs[1] = lr;
09173
09174         egraph->nodes[n]->edges[lr] = - egraph->nodes[n]->edges[lr];
09175         n = egraph->edges[e]->nodes[0];
09176         lr = egraph->edges[e]->nlegs[0];
09177         egraph->nodes[n]->edges[lr] = - egraph->nodes[n]->edges[lr];
09178     }
09179 }
09180 #endif
09181 #ifdef CHECK
09182 for (ed = 0; ed < nEdges; ed++) {
09183     n = egraph->edges[ed]->nodes[0];
09184     lr = egraph->edges[ed]->nlegs[0];
09185     if (egraph->nodes[n]->edges[lr] != -ed-1) {
09186         fprintf(GRCC_Stderr, "+++ node[%d][%d]=%d != - (edge[%d][0] + 1) = %d\n",
09187             n, lr, egraph->nodes[n]->edges[lr], e, -ed-1);
09188         ok = False;
09189     }
09190     n = egraph->edges[ed]->nodes[1];
09191     lr = egraph->edges[ed]->nlegs[1];
09192     if (egraph->nodes[n]->edges[lr] != ed+1) {
09193         fprintf(GRCC_Stderr, "+++ node[%d][%d]=%d != + (edge[%d][0] + 1) = %d\n",
09194             n, lr, egraph->nodes[n]->edges[lr], e, ed+1);
09195         ok = False;
09196     }
09197 }
09198 if (!ok) {
09199     egraph->print();
09200     erEnd("fillEGraph: illegal connection");
09201 }
09202 #endif
09203
09204
09205 // analyse fermion line and determine Fermi statistical sign factor
09206 egraph->getFLines();
09207

```

```

09208 #ifdef CHECK
09209     checkAG("fillEGraph:0");
09210 #endif
09211     return True;
09212 }
09213 }
09214
09215 //-----
09216 int *Assign::reordLeg(int n, int *reord, int *plist, int *used)
09217 {
09218     // Reorder legs of node 'n' in accordance with the definition
09219     // of the interaction in the model
09220     //
09221     // plist[record[j]] = model->interacts[ia]->plist[j]
09222
09223     int lg, ia, lr, deg, pt, ed;
09224     int *ilegs;
09225 #ifdef CHECK
09226     Bool found;
09227 #endif
09228
09229     // external node
09230     if (nodes[n]->cand->st == AS_AssExt) {
09231         reord[0] = 0;
09232         return 0;
09233     }
09234
09235     // degree of the node
09236     deg = nodes[n]->deg;
09237
09238     if (deg <= 1) {
09239         reord[0] = 0;
09240         return 0;
09241     }
09242
09243     // list of particles at the legs of the node 'n'
09244     for (lg = 0; lg < deg; lg++) {
09245         ed = nodes[n]->aedges[lg];
09246         pt = edges[ed]->cand->plist[0];
09247         plist[lg] = legEdgeParticle(n, lg, pt);
09248         used[lg] = 0;
09249     }
09250
09251     // list of legs in the interaction
09252     ia = nodes[n]->cand->ilist[0];
09253     ilegs = model->interacts[ia]->plist;
09254
09255     // reorder
09256 #ifdef CHECK
09257     found = False;
09258 #endif
09259     for (lr = 0; lr < deg; lr++) {
09260         for (lg = 0; lg < deg; lg++) {
09261             if (used[lg] == 0 && plist[lg] == ilegs[lr]) {
09262                 reord[lr] = lg;
09263                 used[lg] = 1;
09264 #ifdef CHECK
09265                 found = True;
09266 #endif
09267                 break;
09268             }
09269         }
09270     }
09271 #ifdef CHECK
09272     if (!found) {
09273         printf("*** reordLeg: illegal list of particles:"
09274             "interaction %d ", ia);
09275         prIntArray(deg, ilegs, " ");
09276         printf("vertex %d ", n);
09277         prIntArray(deg, plist, "\n");
09278         prCand("reordLeg");
09279         erEnd("reordLeg: illegal list of particles");
09280     }
09281 #endif
09282 }
09283
09284     return reord;
09285 }
09286
09287 //=====
09288 // Adjust the direction of a particle on an edge and on a leg of
09289 // node.
09290 //-----
09291 int Assign::getLegParticle(int n, int ln)
09292 {
09293     // Get particle code of (n, ln) when particle 'pt' runs
09294     // in the direction of the edge at (n, ln).

```

```

09295 //
09296 // Get particle code in the direction the edge at (n, ln)
09297 // when particle 'pt' is at leg (n, ln).
09298 //
09299 // These two cases are realized by the same function
09300
09301 ANode *nd;
09302 int    elg, ed, pt;
09303
09304 nd = nodes[n];
09305 elg = nd->aelegs[ln];
09306 ed = nd->aedges[ln];
09307 pt = edges[ed]->cand->plist[0];
09308
09309 // normalization of sign for neutral particle
09310 if (elg == 0) {
09311     return model->normalParticle(-pt);
09312 } else {
09313     return model->normalParticle(pt);
09314 }
09315 }
09316
09317 //-----
09318 int Assign::legEdgeParticle(int n, int ln, int pt)
09319 {
09320     // Get particle code of (n, ln) when particle 'pt' runs
09321     // in the direction of the edge at (n, ln).
09322     //
09323     // Get particle code in the direction the edge at (n, nl)
09324     // when particle 'pt' is at leg (n, ln).
09325     //
09326     // These two cases are realized by the same function
09327
09328     // normalization of sign for neutral particle
09329
09330     if (nodes[n]->aelegs[ln] == 0) {
09331         return model->normalParticle(-pt);
09332     } else {
09333         return model->normalParticle(pt);
09334     }
09335 }
09336
09337 //-----
09338 int Assign::legPart(int v, int lg, int nplist, int *plist, int *rlist, const int size)
09339 {
09340     // Convert list of candidate particles in 'plist' at (v, lg) ==> edge
09341     // or edge ==> (v, lg)
09342
09343     int    j, nrlist;
09344
09345     nrlist = 0;
09346     for (j = 0; j < nplist; j++) {
09347         nrlist = intSetAdd(nrlist, rlist,
09348             legEdgeParticle(v, lg, plist[j]), size);
09349     }
09350     return nrlist;
09351 }
09352
09353 //-----
09354 int Assign::candPart(int v, int ln, int *plist, const int size)
09355 {
09356     // update candidate particles incoming to (v, ln)
09357
09358     int    en;
09359     int    ntplist;
09360     ECand  *ec;
09361
09362     en = nodes[v]->aedges[ln];
09363
09364 #ifdef CHECK
09365     if (edges[en]->cand->det) {
09366         printf("*** candPart : particle of leg (%d, %d) "
09367             "is assigned to %d\n",
09368             v, ln, edges[en]->cand->plist[0]);
09369         checkCand("candPart");
09370         mgraph->printAdjMat(mgraph->curcl);
09371         prCand("candPart");
09372         erEnd("candPart : particle of leg is assigned");
09373     }
09374 #endif
09375
09376     ec = edges[en]->cand;
09377
09378     ntplist = legPart(v, ln, ec->nplist, ec->plist, plist, size);
09379
09380     return ntplist;
09381 }

```

```

09382
09383 //=====
09384 // tools for assignment
09385
09386 //-----
09387 int Assign::selUnAssVertexSimp(int lastv)
09388 {
09389     // Select a vertex for assignment to its leg.
09390     // We take one with minimum number of candidates
09391     //
09392     // There may be better method.
09393
09394     int v0, v;
09395
09396     // select vertex one by one in the sequential order of node number
09397     v0 = Max(lastv+1, nExtern);
09398     for (v = v0; v < nNodes; v++) {
09399         if (nodes[v]->cand->st == AS_UnAssLegs) {
09400             return v;
09401         }
09402     }
09403     return -1;
09404 }
09405
09406 //-----
09407 int Assign::selUnAssVertex(void)
09408 {
09409     // Select a vertex for assignment to its leg.
09410     // We take one with minimum number of candidates
09411     //
09412     // There may be better method.
09413
09414     int v0, v, nl;
09415
09416     // select vertex one by one in the sequential order of node number
09417     v0 = -1;
09418     nl = 0;
09419     for (v = 0; v < nNodes; v++) {
09420         if (nodes[v]->cand->st == AS_UnAssLegs) {
09421             if (nodes[v]->cand->nilist == 1) {
09422                 return v;
09423             } else if (nodes[v]->cand->nilist > 1) {
09424                 // select node with fewer candidates
09425                 if (v0 < 0 || nodes[v]->cand->nilist < nl) {
09426                     v0 = v;
09427                     nl = nodes[v]->cand->nilist;
09428                 }
09429             }
09430         }
09431     }
09432     return v0;
09433 }
09434
09435 //-----
09436 int Assign::selUnAssLeg(int v, int lastlg)
09437 {
09438     // Select a leg of vertex 'v' for the assignment.
09439     // The lastly selected leg was 'lastlg'.
09440
09441     int lg0, lg, e;
09442 #ifdef CHECK
09443     int n0, n1;
09444 #endif
09445
09446     // lg0 = Max(lastlg, lastlg + 1);
09447     lg0 = lastlg + 1;
09448
09449     for (lg = lg0; lg < nodes[v]->deg; lg++) {
09450
09451 #ifdef CHECK
09452         if (lastlg >= 0) {
09453             n0 = nodes[v]->anodes[lastlg];
09454         } else {
09455             n0 = -1;
09456         }
09457         n1 = nodes[v]->anodes[lg];
09458         if (n0 > n1) {
09459             printf("*** selUnAssLeg: n0=%d > n1=%d\n", n0, n1);
09460             printf("*** illegal connection\n");
09461             erEnd("selUnAssLeg: n0 > n1");
09462         }
09463 #endif
09464
09465         e = nodes[v]->aedges[lg];
09466         if (!edges[e]->cand->det) {
09467             return lg;
09468         }

```



```

09469
09470     }
09471     return -1;
09472 }
09473
09474 //-----
09475 NCandSt Assign::assignIVertex(int v, int ia)
09476 {
09477     // Try to assign interaction 'ia' to 'v'
09478
09479     int    lplist[GRCC_MAXLEGS], iplist[GRCC_MAXLEGS];
09480     int    lg, e, pt, deg;
09481
09482
09483     if (nodes[v]->cand->st == AS_Assigned || nodes[v]->cand->st == AS_AssExt) {
09484         return AS_Assigned0;
09485     }
09486
09487     deg = nodes[v]->deg;
09488     if (deg != model->interacts[ia]->nlegs) {
09489         return AS_Impossible;
09490     }
09491
09492     // list of particles at the legs of the vertex
09493     for (lg = 0; lg < deg; lg++) {
09494         e = nodes[v]->aedges[lg];
09495         if (edges[e]->cand->nplist != 1) {
09496             return AS_UnAssLegs;
09497         } else {
09498             pt = edges[e]->cand->plist[0];
09499             lplist[lg] = legEdgeParticle(v, lg, pt);
09500         }
09501         iplist[lg] = model->interacts[ia]->plist[lg];
09502     }
09503
09504     sorti(deg, lplist);
09505     sorti(deg, iplist);
09506
09507     // from interaction
09508     if (cmpArray(deg, lplist, deg, iplist) == 0) {
09509         // orders of coupling constants should be checked ???
09510         astack->pushNode(v);
09511         nodes[v]->cand->st = AS_Assigned;
09512         nodes[v]->cand->nlist = 1;
09513         nodes[v]->cand->ilist[0] = ia;
09514         return AS_Assigned;
09515     }
09516
09517     return AS_Impossible;
09518 }
09519
09520 //-----
09521 Bool Assign::assignPLeg(int n, int ln, int pt)
09522 {
09523     // A particle 'pt' is assigned to leg 'ln' of node 'n'
09524
09525     ANode *nd;
09526     int e, ept;
09527     Bool ok;
09528
09529 #ifdef CHECK
09530     checkNode(n, "assignPLeg0");
09531     checkCand("assignPLeg");
09532 #endif
09533
09534     // nodes and the edge
09535     nd = nodes[n];
09536     e = nd->aedges[ln];
09537
09538     // already determined
09539     if (edges[e]->cand->det) {
09540         return True;
09541     }
09542
09543     if (!isOrdPLeg(n, ln, pt)) {
09544         return False;
09545     }
09546
09547     // particle on the edge
09548     ept = legEdgeParticle(n, ln, pt);
09549
09550 #ifdef CHECK
09551     if (!isIn(edges[e]->cand->nplist, edges[e]->cand->plist, ept)) {
09552         printf("*** assignPLeg: particle %d is not in the cand. of e=%d",
09553             ept, e);
09554         edges[e]->cand->prECand("\n");
09555         prCand("assignPLeg");
09556     }
09557 #endif

```

```

09556         erEnd("assignPLeg: particle is not in the cand.");
09557     }
09558 #endif
09559
09560     // save the current configuration
09561     astack->pushEdge(e);
09562
09563     // determine the particle on the edge
09564     edges[e]->cand->nplist = 1;
09565     edges[e]->cand->plist[0] = ept;
09566
09567     ok = detEdge(e);
09568
09569     return ok;
09570 }
09571
09572 //-----
09573 Bool Assign::detEdge(int e)
09574 {
09575     Bool ok0, ok1;
09576
09577     if (edges[e]->cand->nplist != 1) {
09578         return False;
09579     }
09580     edges[e]->cand->det = True;
09581
09582     // update candidate list
09583     ok0 = updateCandNode(edges[e]->nodes[0]);
09584     if (ok0) {
09585         ok1 = updateCandNode(edges[e]->nodes[1]);
09586     } else {
09587         ok1 = False;
09588     }
09589
09590     return (ok0 && ok1);
09591 }
09592
09593 //-----
09594 Bool Assign::isOrdPLeg(int n, int ln, int pt)
09595 {
09596     int e0, e1, ln0, ep0, pt0, nn, n0, n1, ln1, pt1, e1, ep1;
09597
09598     if (nodes[n]->deg < 2) {
09599         return True;
09600     }
09601     nn = nodes[n]->anodes[ln];
09602     if (n <= nn) {
09603         n0 = n;
09604         n1 = nn;
09605         ln0 = ln;
09606         pt0 = pt;
09607     } else {
09608         n0 = nn;
09609         n1 = n;
09610         e0 = nodes[n]->aedges[ln];
09611         e1 = nodes[n]->aelegs[ln];
09612         ln0 = edges[e0]->nlegs[1-e1];
09613         ep0 = legEdgeParticle(n, ln, pt);
09614         pt0 = legEdgeParticle(n0, ln0, ep0);
09615     }
09616
09617     for (ln1 = 0; ln1 < nodes[n0]->deg; ln1++) {
09618         if (ln1 == ln0 || n1 != nodes[n0]->anodes[ln1]) {
09619             continue;
09620         }
09621         e1 = nodes[n0]->aedges[ln1];
09622         if (!edges[e1]->cand->det) {
09623             continue;
09624         }
09625         ep1 = edges[e1]->cand->plist[0];
09626         pt1 = legEdgeParticle(n0, ln1, ep1);
09627         if ((ln0 < ln1 && pt0 > pt1) ||
09628             (ln0 > ln1 && pt0 < pt1)) {
09629             return False;
09630         }
09631     }
09632     return True;
09633 }
09634
09635 //=====
09636 // Operations of candidate
09637 //-----
09638 Bool Assign::candPartClassify(int v, int *npdass, int *pdass, int *npuass, int *puass, const int size)
09639 {
09640     // Construct the classified lists of particles possible to assign to
09641     // the legs of node v
09642     //

```

```

09643 // pdass = (duplicated set of particles where edges has a unique
09644 // candidate)
09645 // puass = (duplicated set of other candidate particles)
09646
09647 int lg, e, npl, ass, jd, ju, j, pt, pts;
09648
09649 jd = 0;
09650 ju = 0;
09651 for (lg = 0; lg < nodes[v]->deg; lg++) {
09652     e = nodes[v]->aedges[lg];
09653     npl = edges[e]->cand->nplist;
09654     if (npl < 1) {
09655         return False;
09656     }
09657     ass = (npl == 1);
09658     for (j = 0; j < edges[e]->cand->nplist; j++) {
09659         pt = edges[e]->cand->plist[j];
09660         pts = legEdgeParticle(v, lg, pt);
09661         if (ass) {
09662             jd = intSListAdd(jd, pdass, pts, size);
09663         } else {
09664             ju = intSListAdd(ju, puass, pts, size);
09665         }
09666     }
09667 }
09668 *npdass = jd;
09669 *npuass = ju;
09670
09671 return True;
09672 }
09673
09674 //-----
09675 Bool Assign::updateCandNode(int v)
09676 {
09677     // Update the configuration
09678     // - nodes[v]->cand->ilist
09679     // - edges[e]->cand->plist for the adjacent edge
09680     // - nodes[n]->cand->unass for the adjacent node 'n' of 'e'
09681
09682     int npdass, pdass[GRCC_MAXPSLIST];
09683     int npuass, puass[GRCC_MAXPSLIST];
09684     int nsub0, sub0[GRCC_MAXPSLIST];
09685     int niplist, iplist[GRCC_MAXPSLIST];
09686     int nd0, d0[GRCC_MAXMPARTICLES2];
09687     int nd1, d1[GRCC_MAXMPARTICLES2];
09688     int ns0, s0[GRCC_MAXMPARTICLES2];
09689     int neplist, eplist[GRCC_MAXMPARTICLES2];
09690     int nitlist, itlist[GRCC_MAXMINTERACT];
09691     int e, it, j, k, i, lg;
09692
09693     // external node
09694     if (nodes[v]->cand->st == AS_AssExt) {
09695 #ifdef CHECK
09696         e = nodes[v]->aedges[0];
09697         if (e < 0 || edges[e]->cand->nplist != 1) {
09698             printf("*** illegal external node: v=%d e=%d :", v, e);
09699             prCand("updateCandNode");
09700             erEnd("illegal external node");
09701         }
09702 #endif
09703
09704         return True;
09705     }
09706
09707     // impossible configuration.
09708     if (nodes[v]->cand->nlist < 1) {
09709         return False;
09710     }
09711
09712     // list of possible particles on the edges of the vertex.
09713     // pdass = (set of assigned particles)
09714     // puass = (list of particles of edges with two of more candidates)
09715
09716     niplist = 0;
09717     nitlist = 0;
09718     if (!candPartClassify(v, &npdass, pdass, &npuass, puass, GRCC_MAXPSLIST)) {
09719         return False;
09720     }
09721
09722     if (npdass < 1) {
09723         return False;
09724     }
09725
09726     // from interaction : slist
09727     // Conditions :
09728     // 1. pdass \subset slist
09729     // 2. slist-pdass \subset puass

```

```

09730 // from interaction : slist
09731 // conditions : pdass \subset slist \subset (pdass + puass)
09732 // sub0 = slist - pdass,
09733 nitlist = 0;
09734 for (j = 0; j < nodes[v]->cand->nilist; j++) {
09735     it = nodes[v]->cand->ilist[j];
09736     // conditions:
09737     // 1. pdass \subset slist <==> pdass-slist = \emptyset
09738     // 2. slist-pdass \subset puass <==> (slist-pdass)-puass = \emptyset
09739     if (isSubSList(npdass, pdass,
09740                   model->interacts[it]->nslist,
09741                   model->interacts[it]->slist) ) {
09742         nsub0 = subtrSet(model->interacts[it]->nslist,
09743                         model->interacts[it]->slist,
09744                         npdass, pdass, sub0, GRCC_MAXPSLIST);
09745         if (nsub0 < 1) {
09746             // slist == pdass : no additional candidate particle
09747             nitlist = intSetAdd(nitlist, itlist, it, GRCC_MAXMINTERACT);
09748         } else {
09749             if (isSubSList(nsub0, sub0, npuass, puass)) {
09750                 nitlist = intSetAdd(nitlist, itlist, it, GRCC_MAXMINTERACT);
09751                 for (k = 0; k < nsub0; k++) {
09752                     niplist = intSetAdd(niplist, iplist, sub0[k], GRCC_MAXPSLIST);
09753                 }
09754             }
09755         }
09756     }
09757 }
09758 }
09759
09760 if (nitlist < 1) {
09761     return False;
09762 }
09763
09764 if (nitlist != nodes[v]->cand->nilist) {
09765     astack->pushNode(v);
09766     nodes[v]->cand->nilist = nitlist;
09767     for (i = 0; i < nitlist; i++) {
09768         nodes[v]->cand->ilist[i] = itlist[i];
09769     }
09770 #ifdef CHECK
09771 } else if (nitlist > nodes[v]->cand->nilist) {
09772     erEnd("larger ncand");
09773 #endif
09774 }
09775
09776 // edge
09777 for (lg = 0; lg < nodes[v]->deg; lg++) {
09778     e = nodes[v]->aedges[lg];
09779     if (edges[e]->cand->nplist > 1) {
09780         // elist = {candidate particles in the direction of the edge}
09781         // s0 = plist \cap elist
09782         neplist = legPart(v, lg, niplist, iplist, eplist, GRCC_MAXMPARTICLES2);
09783         listDiff(edges[e]->cand->nplist, edges[e]->cand->plist,
09784                 neplist, eplist,
09785                 &nd0, d0, &ns0, s0, &nd1, d1);
09786
09787         if (ns0 < 1) {
09788             return False;
09789         }
09790         if (ns0 < edges[e]->cand->nplist) {
09791             astack->pushEdge(e);
09792             edges[e]->cand->nplist = ns0;
09793             for (i = 0; i < ns0; i++) {
09794                 edges[e]->cand->plist[i] = s0[i];
09795             }
09796         }
09797     }
09798 }
09799 for (lg = 0; lg < nodes[v]->deg; lg++) {
09800     e = nodes[v]->aedges[lg];
09801     if (edges[e]->cand->nplist == 1 && !edges[e]->cand->det) {
09802         if (!detEdge(e)) {
09803             return False;
09804         }
09805     }
09806 }
09807
09808 return True;
09809 }
09810
09811 //=====
09812 // Check order of coupling constants, duplication and isomorphism
09813 //-----
09814 Bool Assign::checkOrderCpl(void)
09815 {
09816     // Check order of coupling constants

```

```

09817
09818     int ord[GRCC_MAXNCPLG];
09819     int lcn, n, ia, j, cl;
09820
09821     // list of coupling constants
09822     lcn = model->ncouple;
09823
09824     if (lcn == 1) {
09825         return True;
09826     }
09827
09828     // sum up for each coupling constants
09829     for (j = 0; j < GRCC_MAXNCPLG; j++) {
09830         ord[j] = 0;
09831     }
09832     for (n = 0; n < nNodes; n++) {
09833         cl = pnclass->nd2cl[n];
09834         if (!isATEXternal(pnclass->type[cl])) {
09835             ia = nodes[n]->cand->ilist[0];
09836             for (j = 0; j < lcn; j++) {
09837                 ord[j] += model->interacts[ia]->clist[j];
09838             }
09839         }
09840     }
09841
09842     // comparison
09843     for (j = 0; j < lcn; j++) {
09844         if (sproc->clist[j] != ord[j]) {
09845             return False;
09846         }
09847     }
09848     return True;
09849 }
09850
09851 //-----
09852 Bool Assign::isOrdLegs(void)
09853 {
09854     // Whether graph is duplicated because of the violation
09855     // of ordering in the case of multiple connections
09856     //   v0 <-- v --> v1
09857
09858     int v, l0, v0, l1, v1, e0, e1, q0, q1, p0, p1, cl;
09859
09860     for (v = 0; v < nNodes; v++) {
09861         cl = pnclass->nd2cl[v];
09862         if (!isATEXternal(pnclass->type[cl])) {
09863             for (l0 = 0; l0 < nodes[v]->deg; l0++) {
09864                 v0 = nodes[v]->anodes[l0];
09865                 for (l1 = l0+1; l1 < nodes[v]->deg; l1++) {
09866                     v1 = nodes[v]->anodes[l1];
09867
09868                     if (v0 == v1 && v <= v0) {
09869                         // multiple connections (v, l0) and (v, l1)
09870                         e0 = nodes[v]->aedges[l0];
09871                         e1 = nodes[v]->aedges[l1];
09872                         q0 = edges[e0]->cand->plist[0];
09873                         q1 = edges[e1]->cand->plist[0];
09874                         p0 = legEdgeParticle(v, l0, q0);
09875                         p1 = legEdgeParticle(v, l1, q1);
09876                         if (p0 > p1) {
09877                             // violation of ordering
09878                             return False;
09879                         }
09880                     }
09881                 }
09882             }
09883         }
09884     }
09885     return True;
09886 }
09887
09888 //-----
09889 Bool Assign::isIsomorphic(MNodeClass *cl, BigInt *nsym, BigInt *esym, BigInt *nsym1)
09890 {
09891     // Check whether the current graph is the representative of
09892     // a isomorphic class.
09893     // Returns (nsym, esym)
09894     //   nsym = symmetry factor by the permutation of nodes.
09895     //   esym = symmetry factor by the permutation of edge.
09896     // If this graph is not a representative, then returns (0,0).
09897
09898     int j, cmp, n, cln;
09899     BigInt ngelem;
09900     int *p;
09901     Bool invext;
09902
09903

```

```

09904     ngelem = mgraph->group->nElem();
09905 #ifdef CHECK
09906     if (mgraph->nsym > 1 && ngelem <= 1) {
09907         printf("*** isIsomorphic: illegal group: "
09908             "ngelem=%ld, mgraph->sym=(%ld, %ld)\n",
09909             ngelem, mgraph->nsym, mgraph->esym);
09910         erEnd("Assign::isIsomorphic: illegal group");
09911     }
09912 #endif
09913     if (ngelem == 0) {
09914         *nsym = 1;
09915         *nsym1 = 1;
09916     } else {
09917         *nsym = 0;
09918         *nsym1 = 0;
09919         for (j = 0; j < ngelem; j++) {
09920             // check the graph is the representative and count 'nsym'.
09921
09922             //p = mgraph->group->nextElem();
09923             p = mgraph->group->elem[j];
09924
09925             cmp = cmpPermGraph(p, cl);
09926
09927             if (cmp < 0) { // duplicated graph
09928                 return False;
09929             } else if (cmp == 0) { // not duplicated
09930                 (*nsym)++;
09931
09932                 if (opt->values[GRCC_OPT_SymmInitial] || opt->values[GRCC_OPT_SymmFinal]) {
09933                     invext = True;
09934                     for (n = 0; n < nNodes; n++) {
09935                         cln = pnclass->nd2cl[n];
09936                         if (!isATEXternal(pnclass->type[cln])) {
09937                             continue;
09938                         }
09939                         if (p[n] != n) {
09940                             invext = False;
09941                         }
09942                     }
09943                     if (invext) {
09944                         (*nsym1)++;
09945                     }
09946                 } else {
09947                     (*nsym1)++;
09948                 }
09949             }
09950         }
09951     }
09952     if (*nsym1 == 0) {
09953         *nsym1 = *nsym;
09954     }
09955
09956     // calculate permutations of edges
09957     *esym = edgeSym();
09958     if (*esym < 1) {
09959         return False;
09960     }
09961
09962     return True;
09963 }
09964
09965 //-----
09966 int Assign::cmpPermGraph(int *p, MNodeClass *cl)
09967 {
09968     // compare the graph with one permuted by 'p'.
09969
09970     int n, cmp, n1, n2, p1, p2, j;
09971     ANode *nd1, *np1;
09972     // ANode *nd2, *np2;
09973     int njn, jn[GRCC_MAXLEGS];
09974     int njp, jp[GRCC_MAXLEGS];
09975
09976 #ifdef CHECK
09977     if (p == NULL) {
09978         erEnd("Assign::cmpPermGraph: p=NULL");
09979     }
09980 #endif
09981     for (n = 0; n < nNodes; n++) {
09982         if (!isATEXternal(pnclass->type[pnclass->nd2cl[n]])) {
09983             cmp = cmpNodes(n, p[n], cl);
09984             if (cmp != 0) {
09985                 return cmp;
09986             }
09987         }
09988     }
09989
09990     njn = 0;

```

```

09991     njp = 0;
09992     for (n1 = 0; n1 < nNodes; n1++) {
09993         p1 = p[n1];
09994         nd1 = nodes[n1];
09995         np1 = nodes[p1];
09996         for (n2 = n1; n2 < nNodes; n2++) {
09997             if (mgraph->adjMat[n1][n2] == 0) {
09998                 continue;
09999             }
10000
10001             p2 = p[n2];
10002             if (p1 == n1 && p2 == n2) {
10003                 continue;
10004             }
10005             cmp = mgraph->adjMat[n1][n2] - mgraph->adjMat[p1][p2];
10006             if (cmp != 0) {
10007                 return cmp;
10008             }
10009
10010             njn = 0;
10011             njp = 0;
10012             for (j = 0; j < nd1->deg; j++) {
10013                 if (nd1->anodes[j] == n2) {
10014                     jn[njn++] = getLegParticle(n1, j);
10015                 }
10016             }
10017
10018             for (j = 0; j < np1->deg; j++) {
10019                 if (np1->anodes[j] == p2) {
10020                     jp[njp++] = getLegParticle(p1, j);
10021                 }
10022             }
10023
10024             cmp = njn - njp;
10025             if (cmp != 0) {
10026                 return cmp;
10027             }
10028
10029             // ignore ordering for multiple connections
10030             if (mgraph->adjMat[n1][n2] >= 2) {
10031                 sorti(njn, jn);
10032                 sorti(njp, jp);
10033             }
10034
10035             for (j = 0; j < njn; j++) {
10036                 cmp = jn[j] - jp[j];
10037                 if (cmp != 0) {
10038                     return cmp;
10039                 }
10040             }
10041         }
10042     }
10043     return 0;
10044 }
10045 }
10046
10047 //-----
10048 int Assign::cmpNodes(int nd0, int nd1, MNodeClass *cn)
10049 {
10050     // Comparison of two nodes 'nd0' and 'nd1'
10051     // Ordering is lexicographical (class, connection configuration)
10052     //
10053     int cmp;
10054
10055     // Wether two nodes are in a same class or not.
10056     cmp = cn->ndcl[nd0] - cn->ndcl[nd1];
10057     if (cmp != 0) {
10058         return cmp;
10059     }
10060
10061     // interaction
10062     cmp = nodes[nd0]->cand->ilist[0] - nodes[nd1]->cand->ilist[0];
10063     return cmp;
10064 }
10065 }
10066
10067 //-----
10068 BigInt Assign::edgeSym(void)
10069 {
10070     // calculate permutations of edges
10071
10072     int lg[GRCC_MAXLEGS], lt[GRCC_MAXLEGS], lc;
10073     ANode *nd1;
10074     int n1, n2, j, k, mult;
10075     BigInt esym;
10076
10077     esym = 1;

```

```

10078     for (n1 = 0; n1 < nNodes; n1++) {
10079         nd1 = nodes[n1];
10080         for (n2 = n1; n2 < nNodes; n2++) {
10081             if (mgraph->adjMat[n1][n2] > 1) {
10082                 lc = 0;
10083                 for (j = 0; j < nd1->deg; j++) {
10084                     if (nd1->anodes[j] == n2) {
10085                         lg[lc] = 1;
10086                         lt[lc] = getLegParticle(n1, j);
10087                         lc++;
10088                     }
10089                 }
10090                 for (j = 0; j < lc-1; j++) {
10091                     if (lg[j] > 0) {
10092                         for (k = lc-1; k > j; k--) {
10093                             if (lt[j] == lt[k]) {
10094                                 lg[j] += lg[k];
10095                                 lg[k] = 0;
10096                             }
10097                         }
10098                     }
10099                 }
10100
10101                 // calculate symmetry factor
10102                 for (j = 0; j < lc; j++) {
10103                     if (lg[j] < 1) {
10104                         continue;
10105                     }
10106                     mult = lg[j];
10107                     if (mult > 1) {
10108                         if (n1 == n2) {
10109                             // self-loop
10110                             esym *= ipow(2,mult/2)*factorial(mult/2);
10111                         } else {
10112                             esym *= factorial(mult);
10113                         }
10114                     }
10115                 }
10116             }
10117         }
10118     }
10119     return esym;
10120 }
10121
10122 #ifdef CHECK
10123 //=====
10124 // check
10125 //-----
10126
10127 Bool Assign::checkCand(const char *msg)
10128 {
10129     // Check the consistency of Candidate data
10130
10131     Bool ok;
10132     ANode *na;
10133     NCand *nc;
10134     ECand *ec;
10135     int n, lg, e;
10136
10137     // check 'nodes->cand'
10138     ok = True;
10139     for (n = 0; n < nNodes; n++) {
10140         na = nodes[n];
10141         nc = na->cand;
10142
10143         // check unassigned vertex
10144         if (nc->st == AS_UnAssLegs) {
10145
10146             // check assigned vertex
10147         } else if (nc->st == AS_Assigned) {
10148             if (nc->nlist < 1) {
10149                 printf("*** checkCand:7:%s:status (%d) of node %d says"
10150                     " interaction is assigned to %d but ilist=",
10151                     msg, nc->st, n, nc->st);
10152                 prIntArray(nc->nlist, nc->ilist, "\n");
10153                 ok = False;
10154             }
10155
10156             for (lg = 0; lg < nc->deg; lg++) {
10157                 e = na->aedges[lg];
10158                 ec = edges[e]->cand;
10159                 if (ec->nplist != 1) {
10160                     printf("*** checkCand:8:%s:status (%d) of node %d says"
10161                         " interaction is assigned "
10162                         " but unassigned edge %d is found\n",
10163                         msg, nc->st, n, e);
10164                     ok = False;

```



```

10165         }
10166     }
10167
10168     // external particle
10169     } else if (nc->st == AS_AssExt) {
10170         // pt = nc->ilist[0];
10171         // *** pte = legEdgeParticle(n, 0, - pt);
10172     } else {
10173         printf("*** checkCand:10:%s:illegal status of node %d : %d",
10174             msg, n, nc->st);
10175         ok = False;
10176     }
10177 }
10178
10179 // check edges
10180
10181 for (e = 0; e < nEdges; e++) {
10182     ec = edges[e]->cand;
10183     if (ec != NULL && ec->nplist < 1) {
10184         printf("*** checkCand:12:%s:illegal edge %d\n", msg, e);
10185         ok = False;
10186     }
10187 }
10188
10189 if (!ok) {
10190     printf("*** checkCand:15:%s:illegal configuration\n", msg);
10191     prCand("checkCand");
10192     printf("*** checkCand:16:illegal configuration\n");
10193     erEnd("checkCand:16:illegal configuration");
10194 }
10195 return ok;
10196 }
10197
10198 //-----
10199 void Assign::checkNode(int n, const char *msg)
10200 {
10201     int j, it;
10202
10203     for (j = 0; j < nodes[n]->cand->nilist; j++) {
10204         it = nodes[n]->cand->ilist[j];
10205         if (Abs(it) >= GRCC_MAXINTERACT) {
10206             printf("*** %s: n=%d, j=%d, it=%d\n", msg, n, j, it);
10207             nodes[n]->cand->prnCand(msg);
10208             printf("\n");
10209             erEnd("checkNode:illegal it");
10210         }
10211     }
10212 }
10213 #endif // CHECK
10214
10215 //*****
10216 // astack.cc
10217 //=====
10218 // Assign particles to the edges and interactions to nodes.
10219 // Completed graph data is saved in the form of EGraph.
10220
10221 //=====
10222 // stack operations
10223 //-----
10224 void NStack::print(const char *msg)
10225 {
10226     printf(" node=%d, deg=%d, st=%d, ilist=", noden, deg, st);
10227     prllist(nilist, ilist, msg);
10228 }
10229
10230 //-----
10231 void EStack::print(const char *msg)
10232 {
10233     printf(" edge=%d, det=%d, plist=", edgen, det);
10234     prllist(nplist, plist, msg);
10235 }
10236
10237 //-----
10238 AStack::AStack(int nsize, int esize)
10239 {
10240     int j;
10241
10242     agraph = NULL;
10243
10244     nSize = nsize;
10245     eSize = esize;
10246     if (nSize > 0) {
10247         nStack = new NStack*[nSize];
10248     } else {
10249         nStack = NULL;
10250     }
10251     if (eSize > 0) {

```

```

10252         eStack = new EStack*[eSize];
10253     } else {
10254         eStack = NULL;
10255     }
10256
10257     nStackP = 0;
10258     eStackP = 0;
10259
10260     for (j = 0; j < nSize; j++) {
10261         nStack[j] = new NStack();
10262     }
10263
10264     for (j = 0; j < eSize; j++) {
10265         eStack[j] = new EStack();
10266     }
10267 }
10268
10269 //-----
10270 AStack::~AStack(void)
10271 {
10272     int j;
10273
10274     if (eStack != NULL) {
10275         for (j = eSize-1; j >= 0; j--) {
10276             if (eStack[j] != NULL) {
10277                 delete eStack[j];
10278                 eStack[j] = NULL;
10279             }
10280         }
10281         delete[] eStack;
10282         eStack = NULL;
10283     }
10284
10285     if (nStack != NULL) {
10286         for (j = nSize-1; j >= 0; j--) {
10287             if (nStack[j] != NULL) {
10288                 delete nStack[j];
10289                 nStack[j] = NULL;
10290             }
10291         }
10292         delete[] nStack;
10293         nStack = NULL;
10294     }
10295 }
10296
10297 //-----
10298 void AStack::setAGraph(Assign *ag)
10299 {
10300     agraph = ag;
10301 }
10302
10303 //-----
10304 void AStack::pushNode(int n)
10305 {
10306     NCand *nc;
10307     NStack *ns;
10308     int j;
10309
10310 #ifndef CHECK
10311     if (agraph == NULL) {
10312         erEnd("pushNode: agraph is not defined");
10313     }
10314 #endif
10315     if (nStackP >= GRCC_MAXNSTACK) {
10316         erEnd("N-stack overflow (GRCC_MAXNSTACK)");
10317     }
10318     nc = agraph->nodes[n]->cand;
10319     if (nc->nilist >= GRCC_MAXMINTERACT) {
10320         erEnd("N-stack: too long list (GRCC_MAXMINTERACT)");
10321     }
10322     ns = nStack[nStackP];
10323     ns->noden = n;
10324     ns->deg = nc->deg;
10325     ns->st = nc->st;
10326     ns->nilist = nc->nilist;
10327     for (j = 0; j < nc->nilist; j++) {
10328         ns->ilist[j] = nc->ilist[j];
10329     }
10330     nStackP++;
10331 }
10332
10333 //-----
10334 void AStack::pushEdge(int e)
10335 {
10336     ECand *ec;
10337     EStack *es;
10338     int j;

```

```

10339
10340 #ifdef CHECK
10341     if (agraph == NULL) {
10342         erEnd("pushEdge: agraph is not defined");
10343     }
10344 #endif
10345     if (eStackP >= GRCC_MAXESTACK) {
10346         erEnd("E-stack overflow (GRCC_MAXESTACK)");
10347     }
10348     ec = agraph->edges[e]->cand;
10349     if (ec->nplist >= GRCC_MAXMPARTICLES2) {
10350         erEnd("E-stack: Too long list (GRCC_MAXMPARTICLES)");
10351     }
10352     es = eStack[eStackP];
10353     es->edgen = e;
10354     es->det = ec->det;
10355     es->nplist = ec->nplist;
10356     for (j = 0; j < ec->nplist; j++) {
10357         es->plist[j] = ec->plist[j];
10358     }
10359     eStackP++;
10360 }
10361
10362 //-----
10363 void AStack::checkPoint(CheckPt sav)
10364 {
10365     sav[0] = nStackP;
10366     sav[1] = eStackP;
10367 }
10368
10369 //-----
10370 void AStack::restoreNode(int spr)
10371 {
10372     NStack *stc;
10373     int sp, n, j;
10374
10375     for (sp = nStackP-1; sp >= spr; sp--) {
10376         stc = nStack[sp];
10377         n = stc->noden;
10378         agraph->nodes[n]->cand->deg = stc->deg;
10379         agraph->nodes[n]->cand->st = stc->st;
10380         agraph->nodes[n]->cand->nilist = stc->nilist;
10381         for (j = 0; j < stc->nilist; j++) {
10382             agraph->nodes[stc->noden]->cand->ilist[j] = stc->ilist[j];
10383         }
10384     }
10385     nStackP = spr;
10386 }
10387
10388 //-----
10389 void AStack::restoreEdge(int spr)
10390 {
10391     EStack *stc;
10392     int sp, e, j;
10393
10394     for (sp = eStackP-1; sp >= spr; sp--) {
10395         stc = eStack[sp];
10396         e = stc->edgen;
10397         agraph->edges[e]->cand->det = stc->det;
10398         agraph->edges[e]->cand->nplist = stc->nplist;
10399         for (j = 0; j < stc->nplist; j++) {
10400             agraph->edges[e]->cand->plist[j] = stc->plist[j];
10401         }
10402     }
10403     eStackP = spr;
10404 }
10405
10406 //-----
10407 void AStack::restore(CheckPt sav)
10408 {
10409     restoreNode(sav[0]);
10410     restoreEdge(sav[1]);
10411 }
10412
10413 #ifdef CHECK
10414 //-----
10415 void AStack::restoreMsg(CheckPt sav, const char *msg)
10416 {
10417     if (agraph == NULL) {
10418         erEnd("restore: agraph is not defined");
10419     }
10420
10421     restore(sav);
10422
10423     if (!agraph->checkCand("restore")) {
10424         printf("restore is called from %s\n", msg);
10425     }

```

```

10426 }
10427 #endif
10428
10429 //-----
10430 void AStack::prStack(void)
10431 {
10432     int j;
10433
10434     printf("+++ prStack : (%d, %d)", nStackP, eStackP);
10435     for (j = 0; j < nStackP; j++) {
10436         printf("N:%4d ", j);
10437         nStack[j]->print("\n");
10438     }
10439     for (j = 0; j < eStackP; j++) {
10440         printf("E:%4d ", j);
10441         eStack[j]->print("\n");
10442     }
10443 }
10444
10445 //*****
10446 // class Fraction
10447 //=====
10448 Fraction::Fraction(BigInt n, BigInt d)
10449 {
10450     BigInt g;
10451
10452     g = gcd(n, d);
10453     num = n/g;
10454     den = d/g;
10455     ratio = Real(n)/Real(d);
10456 }
10457
10458 //-----
10459 void Fraction::print(const char *msg)
10460 {
10461     double err = Abs(Real(num)/Real(den) - ratio);
10462
10463     if (err > GRCC_FRACERROR) {
10464         printf("%ld/%ld(%g) (overflow)%s", num, den, ratio, msg);
10465     } else {
10466         printf("%ld/%ld(%g)%s", num, den, ratio, msg);
10467     }
10468 }
10469
10470 //-----
10471 void Fraction::setValue(BigInt n, BigInt d)
10472 {
10473     num = n;
10474     den = d;
10475     ratio = Real(n)/Real(d);
10476 }
10477
10478 //-----
10479 void Fraction::setValue(Fraction &f)
10480 {
10481     num = f.num;
10482     den = f.den;
10483     ratio = f.ratio;
10484 }
10485
10486 //-----
10487 BigInt Fraction::gcd(BigInt n0, BigInt n1)
10488 {
10489     BigInt nn[2], r;
10490     int nc;
10491
10492     nn[0] = Abs(n0);
10493     nn[1] = Abs(n1);
10494     nc = 0;
10495
10496     while (1) {
10497         r = nn[nc] % nn[1-nc];
10498         if (r == 0) {
10499             return nn[1-nc];
10500         }
10501         nn[nc] = r;
10502         nc = 1 - nc;
10503     }
10504 }
10505
10506 //-----
10507 void Fraction::normal(void)
10508 {
10509     BigInt g;
10510
10511     if (den == 0) {
10512         erEnd("Fraction: den==0");

```

```

10513     }
10514     g = gcd(num, den);
10515     num /= g;
10516     den /= g;
10517     if (den < 0) {
10518         num = - num;
10519         den = - den;
10520     }
10521 }
10522
10523 //-----
10524 void Fraction::add(BigInt n, BigInt d)
10525 {
10526     BigInt g, dl;
10527
10528     if (d < 0) {
10529         n = -n;
10530         d = -d;
10531     }
10532     if (den < 0) {
10533         num = - num;
10534         den = - den;
10535     }
10536     g = gcd(den, d);
10537     dl = d/g;
10538     num = num * dl + n * (den/g);
10539     den = dl*den;
10540     g = gcd(num, den);
10541     num /= g;
10542     den /= g;
10543     ratio += Real(n)/Real(d);
10544 }
10545
10546 //-----
10547 void Fraction::add(Fraction f)
10548 {
10549     double r = ratio + f.ratio;
10550
10551     add(f.num, f.den);
10552     ratio = r;
10553 }
10554
10555 //-----
10556 void Fraction::sub(Fraction f)
10557 {
10558     double r = ratio - f.ratio;
10559
10560     add(-f.num, f.den);
10561     ratio = r;
10562 }
10563
10564 //-----
10565 Bool Fraction::isEq(Fraction f)
10566 {
10567     return (num == f.num && den == f.den);
10568 }
10569
10570 //*****
10571 // common.cc
10572 //=====
10573 static void erEnd(const char *msg)
10574 {
10575     if (erExit != NULL) {
10576         (*erExit)(msg, erExitArg);
10577     }
10578     fprintf(GRCC_Stderr, "*** Error : %s\n\n", msg);
10579     GRCC_ABORT();
10580 }
10581
10582 #define MAXPART 100
10583 //-----
10584 static Bool nextPart(int nelem, int nclist, int *clist, int *nl, int *r)
10585 {
10586     // Generate configuration nl[] sequentially such that
10587     // sum_j^{nclist} nl[j]*clist[j] = nelem
10588     // 0 <= nl[j] (j = 0, ..., nclis-1)
10589     // For control
10590     // for the first call : *r < 0
10591     // otherwise          : *r >= 0, nl is the last configuration
10592     // Returns
10593     // True : succeeded
10594     // False : no more configuration
10595
10596     int rem, pn, j, c;
10597
10598     if (*r < 0) {
10599         *r = 0;

```

```

10600         rem = nelem;
10601         for (j = 0; j < nclist; j++) {
10602             nl[j] = rem/clist[j];
10603             rem -= nl[j]*clist[j];
10604         }
10605         if (rem == 0) {
10606             return True;
10607         }
10608     } else {
10609         rem = 0;
10610     }
10611     for (c = 0; c < MAXPART; c++) {
10612         rem += nl[nclist-1]*clist[nclist-1];
10613         for (pn = nclist-2; pn >= 0 && nl[pn] == 0; pn--) {
10614             ;
10615         }
10616         if (pn < 0) {
10617             return False;
10618         }
10619         rem += clist[pn];
10620         nl[pn]--;
10621         for (j = pn+1; j < nclist; j++) {
10622             nl[j] = rem/clist[j];
10623             rem -= nl[j]*clist[j];
10624         }
10625         if (rem == 0) {
10626             return True;
10627         }
10628     }
10629     erEnd("*** nextPart : illegal control : too many repetition");
10630     return False;
10631 }
10632
10633 //-----
10634 static int *intdup(int n, int *a)
10635 {
10636     int *r, j;
10637
10638     r = new int[n];
10639     for (j = 0; j < n; j++) {
10640         r[j] = a[j];
10641     }
10642     return r;
10643 }
10644
10645 //-----
10646 static int *delintdup(int *a)
10647 {
10648     if (a != NULL) {
10649         delete[] a;
10650     }
10651     return NULL;
10652 }
10653
10654 //-----
10655 static void prillist(int n, const int *a, const char *msg)
10656 {
10657     printf("[");
10658     for (int j = 0; j < n; j++) {
10659         if (j!=0) printf(", ");
10660         printf("%d", a[j]);
10661     }
10662     printf("]%s", msg);
10663 }
10664
10665 //-----
10666 static int nextPerm(int nelem, int nclass, int *cl, int *r, int *q, int *p, int count)
10667 {
10668     // Sequential generation of all permutations.
10669
10670     int j, k, n, e, t;
10671     Bool b;
10672
10673     for (j = 0; j < nelem; j++) {
10674         p[j] = j;
10675     }
10676     if (count < 1) {
10677         for (j = 0; j < nelem; j++) {
10678             q[j] = 0;
10679             r[j] = 0;
10680         }
10681         j = 0;
10682         for (k = 0; k < nclass; k++) {
10683             n = cl[k];
10684             for (e = 0; e < n; e++) {
10685                 r[j] = n - e - 1;
10686                 j++;

```

```

10687     }
10688     }
10689 #ifdef CHECK
10690     if (j != nelem) {
10691         erEnd("inconsistent # elements");
10692     }
10693 #endif
10694     return 1;
10695 }
10696 b = False;
10697 for (j = nelem-1; j >= 0; j--) {
10698     if (q[j] < r[j]) {
10699         for (k = j+1; k < nelem; k++) {
10700             q[k] = 0;
10701         }
10702         q[j]++;
10703         b = True;
10704         break;
10705     }
10706 }
10707 if (!b) {
10708     return (-count);
10709 }
10710
10711 for (j = 0; j < nelem; j++) {
10712     k = j + q[j];
10713     t = p[j];
10714     p[j] = p[k];
10715     p[k] = t;
10716 }
10717 return count + 1;
10718 }
10719
10720 //-----
10721 static BigInt factorial(int n)
10722 {
10723     // returns 1 for n < 1
10724
10725     int r, j;
10726
10727     r = 1;
10728     for (j = 2; j <= n; j++) {
10729         r *= j;
10730     }
10731     return r;
10732 }
10733
10734 //-----
10735 static BigInt ipow(int n, int p)
10736 {
10737     int r, j;
10738
10739     r = 1;
10740     for (j = 0; j < p; j++) {
10741         r *= n;
10742     }
10743     return r;
10744 }
10745
10746 //-----
10747 static int *newArray(int size, int val)
10748 {
10749     // memory allocation of an array
10750
10751     int *a, j;
10752
10753     a = new int[size];
10754     for (j = 0; j < size; j++) {
10755         a[j] = val;
10756     }
10757     return a;
10758 }
10759
10760 //-----
10761 static int *deleteArray(int *a)
10762 {
10763     // memory allocation of an array
10764
10765     delete[] a;
10766     return NULL;
10767 }
10768
10769 //-----
10770 static int **newMat(int n0, int n1, int val)
10771 {
10772     int **m, j, k;
10773

```

```

10774     m = new int*[n0];
10775     for (j = 0; j < n0; j++) {
10776         m[j] = new int[n1];
10777         for (k = 0; k < n1; k++) {
10778             m[j][k] = val;
10779         }
10780     }
10781     return m;
10782 }
10783
10784 //-----
10785 static int **deleteMat(int **m, int n0)
10786 {
10787     int j;
10788
10789     for (j = n0-1; j >= 0; j--) {
10790         delete[] m[j];
10791     }
10792     delete[] m;
10793
10794     return NULL;
10795 }
10796
10797 //-----
10798 static void bsort(int n, int *ord, int *a)
10799 {
10800     int i, j, t;
10801
10802     for (j = n-1; j > 0; j--) {
10803         for (i = 0; i < j; i++) {
10804             if(a[ord[i+1]] < a[ord[i]]) {
10805                 t = ord[i];
10806                 ord[i] = ord[i+1];
10807                 ord[i+1] = t;
10808             }
10809         }
10810     }
10811 }
10812
10813 //-----
10814 static void prMomStr(int mom, const char *ms, int mn)
10815 {
10816     if (mom == 0) {
10817         return;
10818     } else if (mom == 1) {
10819         printf(" + %s%d", ms, mn);
10820     } else if (mom > 0) {
10821         printf(" + %d*%s%d", mom, ms, mn);
10822     } else if (mom == -1) {
10823         printf(" - %s%d", ms, mn);
10824     } else {
10825         printf(" - %d*%s%d", -mom, ms, mn);
10826     }
10827 }
10828
10829 //-----
10830 static void prIntArray(int n, int *p, const char *msg)
10831 {
10832     int j;
10833
10834     printf("[");
10835     for (j = 0; j < n; j++) {
10836         if (j!=0) printf(", ");
10837         printf("%2d", p[j]);
10838     }
10839     printf("]%s", msg);
10840 }
10841
10842 //-----
10843 static void prIntArrayErr(int n, int *p, const char *msg)
10844 {
10845     int j;
10846
10847     fprintf(stderr, "[");
10848     for (j = 0; j < n; j++) {
10849         if (j!=0) fprintf(stderr, ", ");
10850         fprintf(stderr, "%2d", p[j]);
10851     }
10852     fprintf(stderr, "]%s", msg);
10853 }
10854
10855 //-----
10856 static void sortrec(int l, int r, int *a)
10857 {
10858     // quick sort : taken from N. Wirth

```



```

10861     int i,j, x, w;
10862
10863     i = l;
10864     j = r;
10865     x = a[(l+r)/2];
10866     do {
10867         while(a[i] < x) i++;
10868         while(x < a[j]) j--;
10869         if (i <= j) {
10870             w = a[i]; a[i] = a[j]; a[j] = w;
10871             i++; j--;
10872         }
10873     } while (i < j);
10874     if (l < j) sortrec(l, j, a);
10875     if (i < r) sortrec(i, r, a);
10876 }
10877
10878 //-----
10879 static void sorti(int size, int *a)
10880 {
10881     sortrec(0, size-1, a);
10882 }
10883
10884 //-----
10885 static int sortb(int n, int *a)
10886 {
10887     int i, j, t, nswap;
10888
10889     nswap = 0;
10890     for (j = n-1; j > 0; j--) {
10891         for (i = 0; i < j; i++) {
10892             if(a[i+1] < a[i]) {
10893                 t = a[i];
10894                 a[i] = a[i+1];
10895                 a[i+1] = t;
10896                 nswap++;
10897             }
10898         }
10899     }
10900
10901     // the sign of the permutation is (-1)^(nswap)
10902     return nswap;
10903 }
10904
10905 #ifdef CHECK
10906 //-----
10907 static Bool isIn(int n, int *a, int v)
10908 {
10909     int j;
10910
10911     for (j = 0; j < n; j++) {
10912         if (a[j] == v) {
10913             return True;
10914         }
10915     }
10916     return False;
10917 }
10918 #endif
10919
10920 //-----
10921 static int intSetAdd(int n, int *a, int v, const int size)
10922 {
10923     // Add 'v' into 'a'.
10924     // 'n' is the current # of element.
10925     // 'a' is assumed sorted without duplicated elements.
10926     // Size of 'a' should be large enough.
10927
10928     int j, k;
10929
10930     if (n >= size) {
10931         fprintf(GRCC_Stderr, "*** intSetAdd : array out of range (>%d)\n", size);
10932         erEnd("intSetAdd : array out of range (GRCC_MAXPSLIST)");
10933     }
10934     for (j = 0; j < n; j++) {
10935         if (a[j] > v) {
10936             break;
10937         } else if (a[j] == v) {
10938             return n;
10939         }
10940     }
10941
10942     // 'j' can be equal to 'n'
10943     for (k = n-1; k >= j; k--) {
10944         a[k+1] = a[k];
10945     }
10946     a[j] = v;
10947     return n+1;

```

```

10948 }
10949
10950 //-----
10951 static int intSListAdd(int n, int *a, int v, const int size)
10952 {
10953     // Add 'v' into 'a'.
10954     // 'n' is the current # of element.
10955     // 'a' is assumed sorted without duplicated elements.
10956     // Size of 'a' should be large enough.
10957
10958     int j, k;
10959
10960     if (n >= size) {
10961         fprintf(GRCC_Stderr, "*** intSListAdd : array out of range (>%d)\n", size);
10962         erEnd("intSListAdd : array out of range");
10963     }
10964     for (j = 0; j < n; j++) {
10965         if (a[j] >= v) {
10966             break;
10967         }
10968     }
10969
10970     // 'j' can be equal to 'n'
10971     for (k = n-1; k >= j; k--) {
10972         a[k+1] = a[k];
10973     }
10974     a[j] = v;
10975     return n+1;
10976 }
10977
10978 //-----
10979 static int cmpArray(int na, int *a, int nb, int *b)
10980 {
10981     int j, cmp;
10982
10983     cmp = na - nb;
10984     if (cmp != 0) {
10985         return cmp;
10986     }
10987     for (j = 0; j < na; j++) {
10988         cmp = a[j] - b[j];
10989         if (cmp != 0) {
10990             return cmp;
10991         }
10992     }
10993     return 0;
10994 }
10995
10996 //-----
10997 static Bool leqArray(int n, int *a, int *b)
10998 {
10999     int j;
11000
11001     for (j = 0; j < n; j++) {
11002         if (a[j] > b[j]) {
11003             return False;
11004         }
11005     }
11006     return True;
11007 }
11008
11009 //-----
11010 // convert list to sorted list
11011 static int toSList(int n, int *a)
11012 {
11013     sorti(n, a);
11014     return n;
11015 }
11016
11017 //-----
11018 // as set operation assuming a and b are sorted with duplication
11019 // p := a \ b; q := a \cap b; r := b \ a;
11020 // p, q, r are sorted without duplication
11021 static void listDiff(int na, int *a, int nb, int *b, int *np, int *p, int *nq, int *q, int *nr, int
    *r)
11022 {
11023     int ja, jb;
11024
11025     *np = *nq = *nr = 0;
11026     ja = jb = 0;
11027     while (ja < na && jb < nb) {
11028         while (ja < na && a[ja] < b[jb]) {
11029             p[(*np)++] = a[ja++];
11030         }
11031         while (jb < nb && b[jb] < a[ja]) {
11032             r[(*nr)++] = b[jb++];
11033         }

```

```

11034         if (ja < na && jb < nb && a[ja] == b[jb]) {
11035             q[(*nq)++] = a[ja++];
11036             jb++;
11037         }
11038     }
11039     for (; ja < na; ja++) {
11040         p[(*np)++] = a[ja];
11041     }
11042     for (; jb < nb; jb++) {
11043         r[(*nr)++] = b[jb];
11044     }
11045 }
11046
11047 //-----
11048 static int isSubSList(int na, int *a, int nb, int *b)
11049 {
11050     int ja, jb;
11051
11052     ja = jb = 0;
11053     while (ja < na && jb < nb) {
11054         for (; jb < nb && b[jb] < a[ja]; jb++) {
11055             ;
11056         }
11057         if (jb >= nb || b[jb] > a[ja]) {
11058             return False;
11059         }
11060         for (; jb < nb && ja < na && b[jb] == a[ja]; jb++, ja++) {
11061             ;
11062         }
11063     }
11064     return (ja >= na);
11065 }
11066
11067 //-----
11068 static int subtrSet(int na, int *a, int nb, int *b, int *c, int size)
11069 {
11070     // set subtraction 'c' := 'a' - 'b'.
11071     // 'a' and 'b' are sorted lists (not always unique)
11072     // 'c' is the set (sorted and unique elements)
11073
11074     int ja, jb, jc;
11075
11076     jc = 0;
11077     ja = jb = 0;
11078     while (ja < na && jb < nb) {
11079         while (ja < na && a[ja] < b[jb]) {
11080             if (jc == 0 || c[jc-1] != a[ja]) {
11081                 if (jc >= size) {
11082                     erEnd("subsutSet: too small size of array (GRCC_MAXPSLIST)");
11083                 }
11084                 c[jc++] = a[ja];
11085             }
11086             ja++;
11087         }
11088         while (jb < nb && b[jb] < a[ja]) {
11089             ;
11090         }
11091         if (ja < na && jb < nb && a[ja] == b[jb]) {
11092             ja++;
11093             jb++;
11094         }
11095     }
11096     for (; ja < na; ja++) {
11097         if (jc == 0 || c[jc-1] != a[ja]) {
11098             c[jc++] = a[ja];
11099         }
11100     }
11101     return jc;
11102 }
11103
11104 // } } ]

```

4.60 grcc.h

```

00001 #pragma once
00002
00003 /* #[ License : */
00004 /*
00005  * Copyright (C) 2023-2026 T. Kaneko
00006  * When using this file you are requested to refer to the publication
00007  * Comput.Phys.Commun. 92 (1995) 127-152
00008  *
00009  * This file is part of FORM.

```

```

00010 *
00011 *   FORM is free software: you can redistribute it and/or modify it under the
00012 *   terms of the GNU General Public License as published by the Free Software
00013 *   Foundation, either version 3 of the License, or (at your option) any later
00014 *   version.
00015 *
00016 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00017 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00018 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00019 *   details.
00020 *
00021 *   You should have received a copy of the GNU General Public License along
00022 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00023 */
00024 /* #] License : */
00025
00026 #include <stdio.h>
00027 #include <stdlib.h>
00028 #include <string.h>
00029 #include <time.h>
00030
00031 #define CHECK
00032 //=====
00033 extern "C" {
00034 #include "grccparam.h"
00035 }
00036
00037 //=====
00038 // Name space of this library
00039 // See 'grccparam.h' for #define
00040 #ifdef GRCC_NAMESPACE
00041 namespace Grcc {
00042 #endif
00043
00044 //=====
00045 // Common types
00046 //
00047 #define True 1
00048 #define False 0
00049 typedef int Bool;
00050
00051 //=====
00052 // Big integer (may be replaced by suitable one)
00053
00054 #define BigInt long
00055 #define ToBigInt(x) ((BigInt) (x))
00056
00057 //=====
00058 // Macro functions
00059 #define Real(x) ((double) (x))
00060 #define Abs(x) ((x) >= 0 ? (x) : (-x))
00061 #define Sign(x) ((x) >= 0 ? (1) : (-1))
00062 #define Max(x, y) ((x) > (y) ? (x) : (y))
00063 #define Min(x, y) ((x) < (y) ? (x) : (y))
00064 #define Second(t) ((double) (*t)=(double) (clock() / ((double)CLOCKS_PER_SEC))))
00065 #define isATEXternal(x) ((x)==GRCC_AT_Initial || (x)==GRCC_AT_Final || (x)==GRCC_AT_External)
00066
00067 //=====
00068 // types and classes
00069 typedef int Edge2n[2]; // pair of nodes expressing an edge
00070 class Assign;
00071 class AStack;
00072 class EEdge;
00073 class EGraph;
00074 class ENode;
00075 class Interaction;
00076 class MGraph;
00077 class MNodeClass;
00078 class MCEdge;
00079 class MCOp;
00080 class MCBridge;
00081 class MCBlock;
00082 class MConn;
00083 class Model;
00084 class MORbits;
00085 class Options;
00086 class Output;
00087 class Particle;
00088 class PNodeClass;
00089 class Process;
00090 class SGroup;
00091 class SProcess;
00092 class DCGraph;
00093
00094 //=====
00095 // type of output functions
00096 typedef Bool OutEGB(EGraph *, void *);

```

```

00097 typedef void OutEG(EGraph *, void *);
00098 typedef void ErExit(const char *msg, void *);
00099
00100 //=====
00101 class Options {
00102 public:
00103     Model      *model;
00104     Process    *proc;
00105     SProcess   *sproc;
00106     Output     *out;           // for output
00107     OutEGB     *outmg;        // call back function of mgraph
00108     OutEGB     *endmg;        // call back function of end of mgraph
00109     OutEG      *outag;        // call back function of agraph
00110     void       *argmg;        // additional argument to outmg
00111     void       *argemg;       // additional argument to endmg
00112     void       *argag;        // additional argument to outag
00113
00114     //switches for graph generation
00115     OptQGRef   qqref[2*GRCC_QGRAF_OPT_Size]; // array of reference to QG-options
00116     int        values[GRCC_OPT_Size];        // array of options
00117     int        qqopt[GRCC_QGRAF_OPT_Size];    // array of QGRAF options
00118
00119     int        nqgopt;                    // effective length of qqref
00120
00121     int        DUMMYPADDING;
00122
00123     // measuring time
00124     double time0;
00125     double time1;
00126
00127     //-----
00128     Options(void);
00129     ~Options(void);
00130     void setDefaultValues(void);
00131     void setOldDefaultValues(void);
00132
00133     void setValue(int ind, int val);
00134     int  getValue(int ind);
00135
00136     void setQGrafOpt(int *qgopt);
00137
00138     void print(void);
00139
00140     void setOutputF(Bool outgrf, const char *fname);
00141     void setOutputP(Bool outgrp, const char *fname);
00142     void printLevel(int l);
00143
00144     void printModel(void);
00145     void setOutMG(OutEGB *omg, void *pt);
00146     void setOutAG(OutEG *oag, void *pt);
00147     void setEndMG(OutEGB *omg, void *pt);
00148     void setErExit(ErExit *ere, void *pt);
00149     const OptDef *getDef(void);
00150     const OptDef *getOldDef(void);
00151     const OptQGDef *getQGDef(void);
00152
00153     void begin(Model *mdl);
00154     void end(void);
00155     void beginProc(Process *prc);
00156     void endProc(void);
00157     void beginSubProc(SProcess *sprc);
00158     void endSubProc(void);
00159     void newMGraph(MGraph *mgr);
00160     void newAGraph(EGraph *egr);
00161     void outModel(void);
00162 };
00163
00164 //=====
00165 class Output {
00166 public:
00167     Options    *opt;
00168     Model      *model;
00169     Process    *proc;
00170     SProcess   *sproc;
00171     char       *outgrf;
00172     FILE       *outgrfp;
00173     char       *outgrp;
00174     FILE       *outgrpp;
00175     int        procId;
00176     Bool       outproc;
00177
00178     Output(Options *optn);
00179     ~Output(void);
00180
00181     void setOutgrf(const char *fname);

```

```

00184 void setOutgrp(const char *fname);
00185 Bool outBeginF(Model *mdl, Bool pr);
00186 Bool outBeginP(Model *mdl, Bool pr);
00187 void outEndF(void);
00188 void outEndP(void);
00189 void outProcBeginF(Process *prc);
00190 void outProcBeginP(Process *prc);
00191 void outProcBegin0(int next, int couple, int loop);
00192 void outSProcBeginF(SProcess *sprc);
00193 void outSProcBeginP(SProcess *sprc);
00194 void outProcEndF(void);
00195 void outProcEndP(void);
00196 void outEGraphF(EGraph *egraph);
00197 void outEGraphP(EGraph *egraph);
00198 void outModelF(void);
00199 void outModelP(void);
00200
00201 };
00202
00203 //=====
00204 class Fraction {
00205 public:
00206     BigInt num, den;
00207     double ratio;
00208
00209     Fraction() { num = 0; den = 1; };
00210     Fraction(BigInt n, BigInt d);
00211
00212     void print(const char *msg);
00213     void setValue(BigInt n, BigInt d);
00214     void setValue(Fraction &f);
00215     void add(BigInt n, BigInt d);
00216     void add(Fraction f);
00217     void sub(Fraction f);
00218     BigInt gcd(BigInt n0, BigInt n1);
00219     void normal(void);
00220     Bool isEq(Fraction f);
00221 };
00222
00223 //*****
00224 // Model
00225 //=====
00226 //-----
00227 class Particle {
00228 public:
00229     Model *mdl;           // the model
00230     char *name;           // the name of the particle
00231     char *aname;          // the name of the anti-particle
00232     int id;               // id of this particle
00233     int ptype;            // the type of particle : GRCC_PT_Scalar, etc.
00234     int neutral;          // True if particle==anti-particle
00235     int pcode;            // Particle code
00236     int acode;            // Anti-particle code
00237     int cmindeg;          // min(deg of connectable interactions)
00238     int cmaxdeg;          // max(deg of connectable interactions)
00239
00240     int extonly;          // can appear only as external particle
00241
00242     //-----
00243     Particle(Model *mdl, int pid, PInput *pinp);
00244     ~Particle(void);
00245
00246     char *particleName(int p);
00247     int particleCode(int p);
00248     char *interactionName(int p);
00249     char *aparticle(void);
00250     void prParticle(void);
00251     int isNeutral(void);
00252     const char *typeName(void);
00253     const char *typeGName(void);
00254
00255 };
00256
00257 //-----
00258 class Interaction {
00259 public:
00260     Model *mdl;           // the model
00261     char *name;           // the name of the interaction
00262     int *plist;            // the list of particle codes
00263     int *clist;            // the orders of coupling constants
00264     int *slist;            // the sorted list of particle codes
00265
00266     int id;               // id of this interaction
00267     int csum;              // the total orders of coupling constants
00268     int nlegs;             // the number of legs
00269     int loop;              // the number of loops
00270     int icode;             // user defined interaction code

```

```

00271
00272     int    nplist;          // the list of particle codes
00273     int    nclist;         // the orders of coupling constants
00274     int    nslist;         // the sorted list of particle codes
00275
00276     //-----
00277     Interaction(Model *modl, int iid, const char* nam, int icode, int *cpl, int nlgs, int *plst, int
csm, int lp);
00278     ~Interaction(void);
00279
00280     void prInteraction(void);
00281 };
00282
00283 //-----
00284 class Model {
00285 public:
00286     char    *name;          // the name of this model
00287     char    **cnlist;       // the list of coupling constant names
00288     int     ncouple;        // the number of coupling consants.
00289
00290     int     nParticles;     // the number of particles
00291     Particle **particles;   // the list of particles
00292     int     pdef;          // the def. of partcls is ended
00293
00294     // list of particles and anti-p. without Undef.
00295     int     nallPart;
00296     int     allPart[GRCC_MAXMPARTICLES2];
00297
00298     // list of particles and anti-p. without ones of extloop=True
00299     int     nintPart;
00300     int     intPart[GRCC_MAXMPARTICLES2];
00301
00302     int     nInteracts;     // the number of interactions.
00303     Interaction **interacts; // the list of interactions
00304     int     vdef;          // the definition of interaction is ended
00305
00306     int     maxnlegs;       // maximum number of legs of an interaction
00307     int     maxcpl;         // maximum number of coupling const.
00308     int     maxloop;        // maximum number of loops inside an intr.
00309
00310     // classification of interactions
00311     int     *cplgcp;        // coupling constants
00312     int     *cplglg;       // degree
00313     int     *cplgnvl;      // number of vertices
00314     int     **cplgvl;      // list of vertices
00315     int     ncplgcp;        // the number of classes
00316
00317     int     defpart;        // GRCC_DEFBYNAME or GRCC_DEFBYCODE
00318
00319     // methods
00320     Model(MInput *minp);
00321     ~Model(void);
00322
00323     void    prModel(void);
00324     void    addParticle(PInput *pinp);
00325     void    addParticleEnd(void);
00326     void    addInteraction(IInput *iinp);
00327     void    addInteractionEnd(void);
00328     int     findParticleName(const char *name);
00329     int     findParticleCode(int pcd);
00330     int     findInteractionName(const char *name);
00331     int     findInteractionCode(int icd);
00332     char    *particleName(int p);
00333     int     particleCode(int p);
00334     int     normalParticle(int pt);
00335     int     antiParticle(int pt);
00336     int     *allParticles(int *len);
00337     int     findMClass(const int cpl, const int dgr);
00338     void    prParticleArray(int n, int *a, const char *msg);
00339
00340     static void printMInput (MInput *min);
00341     static void printPInput (PInput *pin);
00342     static void printIInput (IInput *iin);
00343 };
00344
00345 //*****
00346 // Process
00347 //=====
00348 class PNodeClass {
00349 public:
00350     SProcess *sproc;
00351     int     *deg;           // The degree of each node
00352     int     *type;          // The type of the class : GRCC_AT_xxx
00353     int     *particle;      // The particle code of external node.
00354     int     *couple;        // The orders of coupling constans
00355     int     *cmindeg;       // min(deg of connectable vertex)
00356     int     *cmaxdeg;       // max(deg of connectable vertex)

```

```

00357     int      *count;      // The number of nodes in the class
00358     int      *cl2nd;      // cl2nd[class] <= nd < cl2nd[class+1] = set of nodes
00359     int      *nd2cl;      // nd2cl[node] = class
00360     int      *cl2mcl;     // cl2mcl[class] = class defined in the model.
00361     int      nnodes;
00362     int      nclass;
00363
00364     PNodeClass(SProcess *sprc, int nnodes, int nclass, NCInput *cls);
00365     PNodeClass(SProcess *sprc, int nnodes, int nclass, int *dgs, int *typ, int *ptcl, int *cpl, int
*cnt, int *cmind, int *cmaxd);
00366     ~PNodeClass(void);
00367
00368     void prPNodeClass(void);
00369     void prElem(int e);
00370 };
00371
00372 //=====
00373 class SProcess {
00374     // In sprocess the number of nodes and edges are fixed.
00375     // A node is considered as
00376     // (degree, total order of coupling constants),
00377     // which pair of data defines a class of nodes.
00378
00379 public:
00380     Model      *model;      // model
00381     Process    *proc;       // mother process
00382     Options    *opt;        // options
00383     PNodeClass *pnclass;    // list of classes (cpl and deg is determined)
00384     AStack     *astack;
00385
00386     MGraph     *mgraph;
00387     EGraph     *egraph;
00388     Assign     *agraph;
00389
00390     int      *cl2nd;      // (code of nodes in the class[c])
00391                     // = [cl2nd[c], ..., cl2nd[c+1]-1]
00392     int      *nd2cl;      // node nd is in the class pnclass[nd2cl[nd]]
00393     int      nclass;      // the number of classes
00394
00395     int      ninitl;      // the number of initial particles
00396     int      nfinal;      // the number of final particles
00397     int      nvert;       // the number of vertices
00398
00399     int      clist[GRCC_MAXNCPLG]; // coupling constans of the process
00400     int      id;          // sprocess id
00401     int      loop;        // the number of loops
00402     int      nNodes;      // the number of nodes
00403     int      nEdges;      // the number of edges
00404     int      nExtern;     // the number of external particles
00405     int      ncouple;     // the number of coupling constants
00406     int      tCouple;     // the total coupling constants
00407
00408     int      DUMMYPADDING;
00409
00410     BigInt    mgrcount;    // count generated mgraph
00411     BigInt    agrcount;    // count generated agraph
00412     BigInt    extperm;     // count generated agraph
00413
00414     // the results of the graph generation
00415     BigInt    nMGraphs;    // the number of generated M-graphs
00416     BigInt    nMOPI;       // the number of 1PI M-graphs
00417     Fraction  wMGraphs;    // the weighted sum of M-graphs
00418     Fraction  wMOPI;       // the weighted sum of 1PI M-graphs
00419
00420     BigInt    nAGraphs;    // the number of generated A-graphs
00421     BigInt    nAOPI;       // the number of 1PI A-graphs
00422     Fraction  wAGraphs;    // the weighted sum of A-graphs
00423     Fraction  wAOPI;       // the weighted sum of 1PI A-graphs
00424
00425     // methods
00426     SProcess(Model *mdl, Process *prc, Options *opts, int sid, int *clst, int ncls, NCInput *cls);
00427     SProcess(Model *mdl, Process *prc, Options *opts, int sid, int *clst, int ncls, int *cdeg, int
*ctyp, int *ptcl, int *cpl, int *cnum, int *cmind, int *cmaxd);
00428
00429     ~SProcess(void);
00430
00431     void prSProcess(void);
00432     BigInt generate(void);
00433     void assign(MGraph *mgr);
00434
00435     int toMNodeClass(int *ctyp, int *cldeg, int *clnum, int *cmind, int *cmaxd);
00436     PNodeClass *match(MGraph *mgr);
00437
00438     void endMGraph(MGraph *mgr);
00439     void endAGraph(EGraph *egr);
00440
00441     void resultMGraph(BigInt nmgraphs, Fraction mwsum, BigInt nmopi, Fraction mwopi);

```



```

00442     void resultAGraph(BigInt nagraphs, Fraction awsum, BigInt naopi, Fraction awopi);
00443
00444 };
00445
00446 //=====
00447 class Process {
00448 public:
00449     Model      *model;          // model used for this process
00450     Options    *opt;            // options
00451     BigInt     mgrcount;        // count generated mgraph
00452     BigInt     agrcount;        // count generated agraph
00453     int        *initlPart;      // list of ids of initial particles
00454     int        *finalPart;      // list of ids of final particles
00455
00456     int        id;              // process id
00457     int        ninitl;          // the number of initial particles
00458     int        nfinal;          // the number of final particles
00459     int        ctotall;         // the total number of coupling constants
00460     int        nExtern;         // the number of external particles
00461     int        loop;            // the number of external particles
00462     int        maxnlegs;        // the maximum possible degree of node
00463     int        clist[GRCC_MAXNCPG]; // coupling constants of the process
00464
00465     // table of sprocesses
00466     int        nSubproc;        // the number of sprocesses
00467     SProcess   *sptbl[GRCC_MAXSUBPROCS]; // the table of sprocesses
00468     SProcess   *sproc;          // the current sprocess
00469
00470     // stack for the assignment;
00471     AStack     *astack;
00472
00473     // the number of graphs
00474     BigInt     ngraphs;
00475     BigInt     nopi;
00476     BigInt     wgraphs;
00477     BigInt     wopi;
00478
00479     // the results of the graph generation
00480     BigInt     nMGraphs;        // the number of generated M-graphs
00481     BigInt     nMOPI;           // the number of 1PI M-graphs
00482     Fraction   wMGraphs;        // the weighted sum of M-graphs
00483     Fraction   wMOPI;           // the weighted sum of 1PI M-graphs
00484
00485     BigInt     nAGraphs;        // the number of generated A-graphs
00486     BigInt     nAOPI;           // the number of 1PI A-graphs
00487     Fraction   wAGraphs;        // the weighted sum of A-graphs
00488     Fraction   wAOPI;           // the weighted sum of 1PI A-graphs
00489
00490     double     sec;
00491
00492     Process(int pid, Model *model, Options *opt, int nin, int *initlPart, int nfin, int *finalPart,
00493 int *coupling);
00494     Process(int pid, Model *model, Options *opt, FGInput *fgi);
00495     ~Process(void);
00496
00497     void prProcess(void);
00498     void outProcP(FILE *fp);
00499     void prProcessP(const char *fname);
00500     void mkSProcess(void);
00501 };
00502
00503 //*****
00504 // classes for EGraph
00505 //=====
00506 // Constants
00507
00508 #define GRCC_ED_Undef    0
00509 #define GRCC_ED_Deleted  1
00510 #define GRCC_ED_Extern   2
00511 #define GRCC_ED_Back     3
00512 #define GRCC_ED_Bridge   4
00513 #define GRCC_ED_Inloop   5
00514 #define GRCC_ED_Size     6
00515 #define GRCC_ED_NAMES    {"Undef", "Deleted", "Extern", "Back_Edge", "Bridge", "In_Loop"}
00516
00517 #define GRCC_ND_Undef    0
00518 #define GRCC_ND_Deleted  1
00519 #define GRCC_ND_Initial  2
00520 #define GRCC_ND_Final    3
00521 #define GRCC_ND_CPoint   4
00522 #define GRCC_ND_VBlock   5
00523 #define GRCC_ND_Inblock  6
00524 #define GRCC_ND_Size     7
00525 #define GRCC_ND_NAMES    {"Undef", "Deleted", "Init", "Final", "CPoint", "VBlock", "In_Block"}
00526
00527 //-----

```

```

00528 class ENode {
00529     public:
00530         EGraph *egrph;
00531         int *edges;           // list of edges
00532                               // the value is \pm [(edge index)+1]
00533
00534         int id;               // id of the enode
00535         int maxdeg;           // maximum degree
00536         int deg;              // degree
00537         int extloop;          // loop inside this node or AT_Initial etc.
00538         int ndtype;           // type of the node
00539         int intrct;           // assigned interaction/particle (ext.)
00540
00541         // used in EGraph::biconn()
00542         int *klow;
00543         int visited;
00544
00545         int DUMMYPADDING;
00546
00547         //-----
00548         // functions
00549         ENode(void);
00550         ENode(EGraph *egrph, int loops, int sdeg);
00551         ~ENode(void);
00552         void initAss(EGraph *egrph, int nid, int sdg);
00553         void setId(EGraph *egrph, const int nid);
00554         void copy(ENode *en);
00555         void setExtern(int typ, int pt);
00556         void setType(int typ);
00557         void print(void);
00558
00559 };
00560
00561 //-----
00562 class EEdge {
00563     // momentum is printed like: ("%s%d", (enode.ext)?"Q":"p", enode.momn)
00564     public:
00565         EGraph *egrph;        // egraph
00566
00567         int id;               // id
00568         int ext;
00569         int ptcl;             // assigned particle (agraph)
00570         int deleted;          // deleted edge, if true
00571         int nodes[2];         // nodes of bothsides
00572         int nlegs[2];         // nodes of both side (agraph)
00573
00574         // for biconn
00575         int *emom;            // external momenta
00576         int *lmom;            // loop momenta
00577         int *extMom;          // set of external momenta.
00578
00579         // momentum obtain in searchME
00580         ULong momset;         // set of momenta in bit string (leaf --> root)
00581         int momdir;           // direction (leg=0 --> leg=1)
00582
00583         Bool cut;
00584         int visited;
00585         int conid;            // connected component
00586         int edtype;           // type
00587         int opicomp;          // id of lPI component
00588         int dir;              // direction of momentum
00589
00590         int DUMMYPADDING;
00591
00592         //-----
00593         // functions
00594         EEdge(void);
00595         EEdge(EGraph *egrph, int nedges, int nloops);
00596         ~EEdge(void);
00597         void copy(EEdge *ee);
00598         void setId(EGraph *egrph, const int eid);
00599         void print(void);
00600
00601         void setType(int typ);
00602         void setLMom(int k, int dir);
00603         void setEMom(int nedges, int *extn, int dir);
00604 };
00605
00606 //-----
00607 // type of fermion lines
00608 typedef enum {FL_Open, FL_Closed} FLType;
00609
00610 //-----
00611 class EFLine {
00612     public:
00613         int elist[GRCC_MAXNODES]; // list of (\pm [(edge index)+1])

```

```

00615     FLType ftype;
00616     int     fkind;
00617     int     nlist;
00618
00619     EFLine(void);
00620     void print(const char *msg);
00621 };
00622
00623 //-----
00624 class EGraph {
00625 public:
00626     Options    *opt;           // table of options
00627     Model      *model;
00628     Process    *proc;
00629     SProcess    *sproc;
00630     MGraph     *mgraph;
00631     MConn      *econn;
00632
00633     ENode **nodes;
00634     EEdge **edges;           // edges[nEdges+1]: index starts from 1
00635
00636     BigInt mId;              // id of mgraph
00637     BigInt aId;              // id of agraph in the same mgraph
00638     BigInt sId;              // sequential no. of agraph
00639     BigInt gSubId;           // ???
00640     Bool    assigned;        // mgraph (False) or agraph (True)
00641
00642     int     fsign;
00643     BigInt nsym, esym;       // symmetry factor with symm. ext.
00644     BigInt nsym1;            // symmetry factor without symm. ext.
00645     BigInt extperm;          // the order of group of symm. ext.
00646     BigInt multp;            // multiplicity of graph in symm. ext.
00647
00648     int     pId;
00649
00650     int     sNodes;          // memory size
00651     int     sEdges;          // memory size
00652     int     sMaxdeg;         // memory size
00653     int     sLoops;          // memory size
00654
00655     int     nNodes;
00656     int     nEdges;
00657     int     nExtern;
00658     int     maxdeg;          // maximum value of degree of nodes
00659     int     nLoops;
00660     int     totalc;          // total order of coupling constants
00661
00662     // biconnect
00663     int     nopicom;
00664     int     opi2plp;
00665     int     nopi2p;
00666     int     nadj2ptv;        // the no. of edges connecting 2point vertices
00667
00668     int     DUMMYPADDING;
00669
00670     int     *bidef;
00671     int     *bilow;
00672     int     *extMom;
00673     int     bconn;
00674     int     bicount;
00675     int     loopm;
00676     int     opiCount;
00677
00678     // Fermion lines
00679     EFLine *flines[GRCC_MAXFLINES];
00680     int     nFlines;
00681
00682     int     DUMMYPADDING1;
00683
00684     //-----
00685     // functions
00686     EGraph(int nnodes, int nedges, int mxdeg);
00687     ~EGraph(void);
00688
00689     void copy(EGraph *eg);
00690     void print(void);
00691     void printPy(FILE *fp, long mId);
00692     void fromDGraph(DGraph *dg);
00693     void fromMGraph(MGraph *mgraph);
00694
00695     Bool    optQGrafM(Options *opt);
00696     Bool    optQGrafA(Options *opt);
00697     Bool    isOptE(void);
00698
00699     ENode *setExtern(int n0, int pt, int ndtp);
00700     Bool    isExternal(int nd) { return (nodes[nd]->extloop < 0); };
00701     Bool    isFermion(int nd);

```

```

00702
00703     void setExtLoop(int nd, int val);
00704     void endSetExtLoop(void);
00705
00706     int connComp(void);
00707     int connVisit(int nd, int ncc);
00708
00709     void biconnE(void);
00710     void biinitE(void);
00711     void bisearchE(int nd, int *extlst, int *intlst, int *opiext, int *opiloop);
00712
00713     int findRoot(void);
00714     int dirEdge(int n, int e);
00715     void extMomConsv(void);
00716     int cmpMom(int *lm0, int *em0, int *lml, int *eml);
00717     int groupLMom(int *grp, int *ed2gr);
00718
00719     void chkMomConsv(void);
00720
00721     void prFLines(void);
00722     void getFLines(void);
00723     int fltrace(int fk, int nd0, int *fl);
00724     void addFLine(const FLType ft, int fk, int nfl, int *fl);
00725
00726     int legParticle(int ed, int lg);
00727 };
00728
00729 //*****
00730 // Symmetry group of graphs
00731 //=====
00732 class SGroup {
00733 public:
00734     BigInt size;           // # of allocated elements
00735     BigInt nelemt;         // # of saved elements
00736     int **elem;            // saved elements
00737     int nnodes;            // # of nodes.
00738     int neclss;            // # of classes
00739     int eclass[GRCC_MAXNODES]; // table of classes
00740     int cgen;              // counter for the generation
00741     int csav;              // counter for the saved elements
00742     int permg[GRCC_MAXNODES]; // resulting permutation
00743     int perms[GRCC_MAXNODES]; // curr. elem of saved ones.
00744
00745     int pgr[GRCC_MAXNODES]; // work
00746     int pgq[GRCC_MAXNODES]; // work
00747     int psr[GRCC_MAXNODES]; // work
00748     int psq[GRCC_MAXNODES]; // work
00749
00750     //-----
00751     // functions
00752
00753     SGroup(void);
00754     ~SGroup(void);
00755
00756     void print(void);
00757     void newGroup(int nelmt, int nclss, int *clss);
00758     void clearGroup(void);
00759     void delGroup(void);
00760     int *genNext(void);
00761     void addGroup(int *p);
00762     BigInt nElem(void);
00763     int *nextElem(void);
00764 };
00765
00766 //*****
00767 // MGraph
00768 //=====
00769 // class of nodes for MGraph
00770
00771 class MNode {
00772 public:
00773     int id;                // node id
00774     int deg;               // degree(node) = the number of legs
00775     int clss;              // initial class number in which the node belongs
00776     int extloop;
00777     int cmindeg;
00778     int cmaxdeg;
00779
00780     int freelg;           // the number of free legs
00781     int visited;
00782
00783     MNode(int id, int clss, NCInput *mgi);
00784     MNode(int id, int deg, int extloop, int clss, int cmindeg, int cmaxdeg);
00785 };
00786
00787 //=====
00788 // class of scalar graph expressed by matrix form

```

```

00789 //
00790 // Input : the classified set of nodes.
00791 // Output : control passed to 'EGraph(self)'
00792
00793 class MGraph {
00794
00795 public:
00796
00797     // initial conditions
00798     Options *opt;           // options
00799
00800     // symmetry group
00801     SGroup *group;          // symmetry group
00802     MOrbits *orbits;        // Orbits of nodes with respect to symmetry group
00803
00804     MNode **nodes;          // table of MNode object
00805     BigInt mId;             // process/sprocess ID
00806     int *clist;             // list of initial classes
00807     int pId;                // process/sprocess ID
00808     int nNodes;             // the number of nodes
00809     int nEdges;             // the number of edges
00810     int nLoops;             // the number of loops
00811     int nExtern;            // the number of external nodes
00812     int nClasses;           // the number of initial classes
00813     int mindeg;             // minimum value of degree of nodes
00814     int maxdeg;             // maximum value of degree of nodes
00815
00816     // the current graph
00817     int **adjMat;           // adjacency matrix
00818     MNodeClass *curcl;      // the current 'MNodeClass' object
00819     EGraph *egraph;
00820     BigInt nsym;            // symmetry factor from nodes
00821     BigInt esym;            // symmetry factor from edges
00822
00823     // generated set of graphs
00824     BigInt cDiag;           // the total number of generated graphs
00825     BigInt cLPI;           // the total number of LPI graphs
00826     BigInt cNoTadpole;      // the total number of graphs without tadpoles
00827     BigInt cNoTadBlock;     // the total number of graphs without tad-blocks
00828     BigInt cLPINoTadBlock;  // the total number of LPI graphs without tad-blocks
00829     Fraction wscon;         // weighted sum of graphs
00830     Fraction wsopi;         // weighted sum of LPI graphs
00831
00832     // measures of efficiency
00833     BigInt ngen;            // generated graph before check
00834     BigInt ngconn;         // generated connected graph before check
00835
00836     BigInt nCallRefine;
00837     BigInt discardRefine;
00838     BigInt discardDisc;
00839     BigInt discardIso;
00840
00841     // for options
00842     Bool opi;
00843     Bool opiloop;
00844     Bool extself;
00845     Bool selfloop;
00846     Bool multiedge;
00847     Bool tadpole;
00848     Bool tadblock;
00849     Bool block;
00850     Bool bipart;
00851
00852     int DUMMYPADDING1;
00853
00854     // table of n edge-connected components
00855     MConn *mconn;
00856
00857     // work space for isomorphism
00858     int **modmat;           // permuted adjacency matrix
00859
00860     // work space for biconnected component
00861     int *bidef;
00862     int *bilow;
00863     int *bicol;
00864     int bicount;
00865
00866     int DUMMYPADDING2;
00867
00868     //-----
00869     // functions
00870     MGraph(int pid, int ncl, NCInput *mgi, Options *opt);
00871     MGraph(int pid, int ncl, int *cldeg, int *clnum, int *clexl, int *cmind, int *cmaxd, Options
*opt);
00872     ~MGraph(void);
00873
00874     void init(void);

```

```

00875     BigInt    generate(void);
00876     Bool      isExternal(int nd) { return (nodes[nd]->extloop < 0); };
00877     void      printAdjMat(MNodeClass *cl);
00878     void      print(void);
00879     void      printPy(FILE *fp, long mId);
00880
00881     Bool      isConnected(void);
00882     Bool      visit(int nd);
00883     Bool      isIsomorphic(MNodeClass *cl);
00884     void      permMat(int size, int *perm, int **mat0, int **mat1);
00885     int       compMat(int size, int **mat0, int **mat1);
00886     MNodeClass *refineClass(MNodeClass *cl);
00887     void      bisearchME(int nd, int pd, int ned, int col, MCOpi *mopi, MCBLOCK *mblk, ULong *momset, int
*next, int *nart);
00888     void      biconnME(void);
00889
00890     Bool      isOptM(void);
00891     void      connectClass(MNodeClass *cl);
00892     void      connectNode(int sc, int ss, MNodeClass *cl);
00893     void      connectLeg(int sc, int sn, int tc, int ts, MNodeClass *cl);
00894     void      newGraph(MNodeClass *cl);
00895 };
00896
00897 //=====
00898 // class of node-classes for MGraph
00899 //-----
00900 class MNodeClass {
00901 public:
00902     int      clmat[GRCC_MAXNODES][GRCC_MAXNODES]; // matrix used for classification
00903     int      clist[GRCC_MAXNODES]; // the number of nodes in each class
00904     int      ndcl[GRCC_MAXNODES]; // node --> class
00905     int      flist[GRCC_MAXNODES+1]; // the first node in each class
00906     int      clord[GRCC_MAXNODES]; // ordering of classes
00907     int      cmindeg[GRCC_MAXNODES]; // min(deg of connectable node)
00908     int      cmaxdeg[GRCC_MAXNODES]; // max(deg of connectable node)
00909     int      nNodes; // the number of nodes
00910     int      nClasses; // the number of classes
00911     int      maxdeg; // maximal value of degree(node)
00912
00913     int      flg0;
00914     int      flg1;
00915     int      flg2;
00916
00917     MNodeClass(int nnodes, int nclasses);
00918     ~MNodeClass(void);
00919
00920     void      init(int *cl, int mxdeg, int **adjmat);
00921     void      copy(MNodeClass* mnc);
00922     int      clCmp(int nd0, int nd1, int cn);
00923     void      printMat(void);
00924
00925     void      mkFlist(void);
00926     void      mkNdCl(void);
00927     void      mkClMat(int **adjmat);
00928     void      incMat(int nd, int td, int val);
00929     int      cmpMNCArray(int *a0, int *a1, int ma);
00930     void      reorder(MGraph *mg);
00931 };
00932
00933 //=====
00934 // class of an edge
00935 //-----
00936 class MCEdge {
00937 public:
00938     Edge2n nodes; // nodes at the both size of the edge (leaf --> root)
00939     ULong momset; // set of momenta in bit string
00940     int momdir; // set of momenta in bit string
00941
00942     int      DUMMYPADDING;
00943
00944     MCEdge(void);
00945     ~MCEdge(void);
00946 };
00947
00948 //=====
00949 // class of lPI component
00950 //-----
00951 class MCOpi {
00952 public:
00953     int *nodes; // array of nodes in
00954     int nnodes; // # nodes in the lPI component
00955     int nlegs; // # leg (bridges) of the lPI component
00956     int next; // # external particles of the lPI comp.
00957     int nedges; // # edges in the lPI comp.
00958     int loop; // # loops in the lPI comp.
00959     int ctloop; // # loops in the counter terms in the OP comp.
00960     int mom0lg; // # leg (bridges) with 0 momentum

```

```

00961
00962     int          DUMMYPADDING;
00963
00964     MCOpi(void);
00965     ~MCOpi(void);
00966
00967     void init(void);
00968 };
00969
00970 //=====
00971 // class of bridge
00972 //-----
00973 class MCBridge {
00974 public:
00975     Edge2n nodes; // nodes at the both size of the bridge
00976     int next; // # momenta of ext. particles flowing on the bridge
00977
00978     MCBridge(void);
00979     ~MCBridge(void);
00980 };
00981
00982 //=====
00983 // class of block
00984 //-----
00985 class MCBlock {
00986 public:
00987     Edge2n *edges; // array of edges in the block
00988     int nedges; // # edges in the block
00989     int nartps; // # articulation points of the block
00990     int loop; // # loop in the block
00991
00992     int DUMMYPADDING;
00993
00994     MCBlock(void);
00995     ~MCBlock(void);
00996     void init(void);
00997 };
00998
00999 //=====
01000 // class of table of MConn
01001 //-----
01002 class MConn {
01003 public:
01004     // 2-edge connected components
01005     MCEdge *cedges; // table of edges
01006     MCOpi *opics; // table of n-edge-connected components
01007     MCBridge *bridges; // table of bridges
01008     MCBlock *blocks; // table of blocks
01009     int *articuls; // buffer for nodes for articulation points
01010
01011     int *opisp; // buffer for nodes in 1PI components
01012     int *opistk; // stack of nodes for 1PI components.
01013     Edge2n *blksp; // buffer for edges in blocks
01014     Edge2n *blkstk; // stack of edges for blocks
01015     int snodes; // # nodes
01016     int sedges; // # edges
01017
01018     // opi components (edge-connected)
01019     int nopic; // # 1PI components (n1PIComps)
01020     int nlpopic; // # looped 1PI components (n1PIComps)
01021     int nctopic; // # 1PI components of one counter term.
01022
01023     // edges
01024     int nbacked; // # back edges
01025
01026     // bridges
01027     int nbridges; // # bridges
01028     int ne0bridges; // # bridges whose next=0
01029     int nelbridges; // # bridges whose next=1
01030     int nselfloops;
01031     int nmultiedges;
01032
01033     // blocks (node-connected)
01034     int nblocks; // # blocks
01035     int nalblocks; // # bridges whose next=0
01036     int narticuls; // # articulation points
01037     int neblocks; // # effective looped blocks
01038
01039     // indices to work spaces
01040     int nopisp; // # used in opisp
01041     int opistkptr; // # stack pointer of opistk
01042     int nblksp; // # used in blksp
01043     int blkstkptr; // # stack pointer of tlkstk
01044
01045     int DUMMYPADDING;
01046
01047     MConn(int nnod, int nedg);

```

```

01048     ~MConn(void);
01049
01050     void init(void);
01051     void initCEdges(MGraph *);
01052     void pushNode(int nd);
01053     void pushEdge(int n0, int n1);
01054     void addCEdge(int n0, int n1, ULong momset);
01055     void addOPic(MCOPi *mopi, int stp);
01056     void addBridge(int n0, int n1, int nex, int nextot);
01057     void addArtic(int nd, int mul);
01058     void addBlock(MCBlock *eblk, int stp);
01059     void addBlockSelf(int nd, int mul);
01060     void print(void);
01061     void prEdges(void);
01062 };
01063
01064 //=====
01065 //  class of orbits of nodes
01066 //-----
01067 class MOrbits {
01068     // Usage
01069     // 1. node ==> orbit
01070     //   (class) = nd2or[(node)]
01071     //
01072     // 2. class ==> nodes
01073     //   for (c = 0; c < nClass; c++) {
01074     //       for (j = flist[c]; j < flist[c+1]; j++) {
01075     //           (node) = or2nd[c];
01076     //       }
01077     //   }
01078 public:
01079     int nOrbits;
01080     int nNodes;
01081     int nd2or[GRCC_MAXNODES];
01082     int or2nd[GRCC_MAXNODES];
01083     int flist[GRCC_MAXNODES+1];
01084
01085     MOrbits(void);
01086     ~MOrbits(void);
01087
01088     void print(void);
01089
01090     // construction of orbits
01091     void initPerm(int nnodes);
01092     void fromPerm(int *perm);
01093     void toOrbits(void);
01094 };
01095
01096 //*****
01097 // Particle assignment
01098 //=====
01099 typedef int CheckPt[2];
01100
01101 typedef enum {
01102     AS_UnAssLegs, AS_Assigned, AS_Assigned0, AS_AssExt, AS_Impossible
01103 } NCandSt;
01104
01105 //=====
01106 class NCand {
01107     // List of candidates for the assignment of interactions to a vertex
01108
01109 public:
01110     int      deg;                // degree of the node
01111     NCandSt  st;                // status
01112     int      nilist;            // length of the list
01113     int      ilist[GRCC_MAXMINTERACT]; // list of candidates
01114
01115     //=====
01116     NCand(const NCandSt sta, const int dega, const int nilst, int *ilst);
01117     ~NCand(void);
01118
01119     // print
01120     void prNCand(const char* msg);
01121 };
01122
01123 //=====
01124 class ECand {
01125     // List of candidates for the assignment of particles to an edge
01126
01127 public:
01128     Bool  det;                // determined or not
01129     int   nplist;            // size of the list of candidates
01130     int   plist[GRCC_MAXMPARTICLES2]; // list of candidates
01131
01132     ECand(int dt, int nplist, int *plst);
01133     ~ECand(void);
01134

```



```

01135     // print
01136     void prECand(const char *msg);
01137 };
01138
01139 //=====
01140 class ANode {
01141     // Connection information of a node to others
01142     //
01143     // (this node) -- (adjacent edge) -- (next node)
01144     // (n0, j)          e          n1
01145     //
01146     // e = (aedges[j], aelegs[j])
01147     // n1 = anodes[j]
01148
01149 public:
01150     int deg;           // degree of the node
01151     int nlegs;         // the number of legs already assigned
01152     int *anodes;       // anodes[j] = (next node of leg j)
01153     int *aedges;       // aedges[j] = (next edge of leg j)
01154     int *aelegs;       // aelegs[j] = (leg of the next edge)
01155     NCand *cand;       // candidate list
01156
01157     ANode(int dg);
01158     ~ANode(void);
01159
01160     int newleg(void);   // get a new leg
01161 };
01162
01163 //=====
01164 class AEdge {
01165     // Connection information of an edge
01166     // (self) ==> nodes [(nodes[0], nlegs[0]), (nodes[1], nlegs[1])]
01167     // particle 'ptcl' flows from leg=0 to 1.
01168
01169 public:
01170
01171     ECand *cand;       // candidate
01172     int nodes[2];      // nodes of both sides of the edge
01173     int nlegs[2];      // nodes of both sides of the edge
01174     int ptcl;          // particle defined in the model
01175
01176     int DUMMYPADDING;
01177
01178     AEdge(int n0, int l0, int n1, int l1);
01179     ~AEdge(void);
01180 };
01181
01182 //=====
01183 class Assign {
01184     // Class for particle/interaction assignment.
01185
01186 public:
01187
01188     EGraph *egraph;    // EGraph object
01189     MGraph *mgraph;    // MGraph object
01190     SProcess *sprc;    // Sub-process object
01191     Process *proc;     // Process object
01192     Model *model;      // Model object
01193     Options *opt;      // Option object
01194     AStack *astack;    // Stack for saving candidates
01195     PNodeClass *pncl;  // class of nodes
01196     MOrbits *orbits;   // orbits of nodes by symmetry group
01197
01198     int nNodes;        // the number of nodes
01199     int nEdges;        // the number of edges
01200     int nExtern;       // the number of external particles.
01201     int nETotal;       // the total number of edges
01202
01203     BigInt nAGraphs;   // the number of assigned graphs
01204     Fraction wAGraphs; // the weighted sum of graphs
01205     BigInt nAOPI;      // the number of assigned lPI
01206     Fraction wAOPI;    // the weighted sum of lPI
01207
01208     ANode **nodes;     // table of nodes
01209     AEdge **edges;     // table of edges
01210
01211     CheckPt checkpoint0; // save stack pointers
01212
01213     int cplleft[GRCC_MAXNCPLG]; // coupling constants left
01214
01215     //=====
01216     Assign(SProcess *sprc, MGraph *mgr, PNodeClass *pncl);
01217     ~Assign(void);
01218
01219     //=====
01220     // print lists of candidates
01221     void prCand(const char *msg);

```

```

01222
01223 // check
01224 void checkAG(const char *msg);
01225
01226 //=====
01227 // control of assignment
01228
01229 // entry point of assignment
01230 Bool    assignAllVertices(void);
01231
01232 // select a source node for assignment
01233 Bool    selectVertex(void);
01234 Bool    selectVertexSimp(int lastv);
01235
01236 // select a source leg of the node for assignment
01237 Bool    selectLeg(int v, int lastlg);
01238
01239 // assign a vertex a interaction
01240 Bool    assignVertex(int v);
01241
01242 // assignment procedure is finished. Needs check.
01243 Bool    allAssigned(void);
01244
01245 //=====
01246 // Input and output
01247
01248 // Input from mgraph
01249 Bool    fromMGraph(void);
01250
01251 // add an edge
01252 void    addEdge(int n0, int n1, int nplist, int *plist);
01253
01254 // connect nodes and edges.
01255 void    connect(int n0, int l0, int eg, int el, int n1, int l1);
01256
01257 // Output to egraph
01258 Bool    fillEGraph(int aid, BigInt nsym, BigInt esym, BigInt nsym1);
01259
01260 // reorder legs in accordance with the interaction definition
01261 int     *reordLeg(int n, int *reord, int *plist, int *used);
01262
01263 //=====
01264 // direction of particle on an edge and at (node, leg)
01265
01266 // convert particle code
01267 //   at node-leg ('n', 'ln') <==> edge at ('n', 'ln')
01268 int     getLegParticle(int n, int ln);
01269
01270 // convert particle 'pt' on the edge to ('n', 'ln')
01271 int     legEdgeParticle(int n, int ln, int pt);
01272
01273 // convert candidate list at ('v', 'lg') into in-coming direction
01274 int     legPart(int v, int lg, int nplst, int *plst, int *rlist, const int size);
01275
01276 // convert candidate list at ('v', 'lg') into in-coming direction
01277 int     candPart(int v, int ln, int *plist, const int size);
01278
01279 //=====
01280 // assignment
01281
01282 // find a vertex to be assigned
01283 int     selUnAssVertex(void);
01284 int     selUnAssVertexSimp(int lastv);
01285
01286 // find a leg of the vertex to be assigned
01287 int     selUnAssLeg(int v, int lastlg);
01288
01289 // assign the interaction 'ia' to the vertex 'v'.
01290 NCandSt assignIVertex(int v, int ia);
01291
01292 // assign particle 'pt' the the leg 'ln' of the node 'n'.
01293 Bool    assignPleg(int n, int ln, int pt);
01294 Bool    isOrdPleg(int n, int ln, int pt);
01295 Bool    detEdge(int e);
01296
01297 //=====
01298 // candidates
01299
01300 // construct lists of assigned / unassigned particles at a node
01301 Bool    candPartClassify(int v, int *npdass, int *pdass, int *npuass, int *puass, const int size);
01302
01303 // update candidate list for a vertex 'v'.
01304 Bool    updateCandNode(int v);
01305
01306 //=====
01307 // filter
01308

```

```

01309     Bool    checkOrderCpl(void);
01310     Bool    isOrdLegs(void);
01311     Bool    isIsomorphic(MNodeClass *cl, BigInt *nsym, BigInt *esym, BigInt *nsym1);
01312     int     cmpPermGraph(int *p, MNodeClass *cl);
01313     int     cmpNodes(int nd0, int nd1, MNodeClass *cn);
01314     BigInt  edgeSym(void);
01315
01316     void     saveCouple(int *sav);
01317     void     restoreCouple(int *sav);
01318     Bool     subCouple(int *cpl);
01319
01320 #ifndef CHECK
01321     //=====
01322     // check
01323     Bool     checkCand(const char *msg);
01324
01325     void     checkNode(int n, const char *msg);
01326 #endif
01327 };
01328
01329 //*****
01330 // Stack of candidate lists
01331 //=====
01332 class NStack {
01333 // Stack for backtracking method for a node.
01334
01335 public:
01336     int     noden;
01337     int     deg;
01338     NCandSt st;
01339     int     nilist;
01340     int     ilist[GRCC_MAXMININTERACT];
01341
01342     NStack() { };
01343     ~NStack() { };
01344
01345     void print(const char *msg);
01346 };
01347
01348 //=====
01349 //=====
01350 class EStack {
01351 // Stack for backtracking method for an edge.
01352
01353 public:
01354     int     edgen;
01355     int     det;
01356     int     nplist;
01357     int     plist[GRCC_MAXMPARTICLES2];
01358
01359     EStack() { };
01360     ~EStack() { };
01361
01362     void print(const char *msg);
01363 };
01364
01365 //=====
01366 //=====
01367 class AStack {
01368 // Stack for backtracking method for an edge.
01369
01370 public:
01371     Assign   *agraph;
01372
01373     NStack   **nStack;    // stack for nodes
01374     int       nStackP;    // stack pointer for nodes
01375     int       nSize;      // stack size
01376
01377     EStack   **eStack;    // stack for edges
01378     int       eStackP;    // stack pointer for edges
01379     int       eSize;      // stack size
01380
01381     AStack(int nSize, int eSize);
01382     ~AStack(void);
01383
01384     void setAGraph(Assign *ag);
01385
01386     void checkPoint(CheckPt sav);
01387     void restore(CheckPt sav);
01388     void restoreMsg(CheckPt sav, const char *msg);
01389     void prStack(void);
01390
01391     void pushNode(int n);
01392     void pushEdge(int e);
01393
01394 private:
01395     void restoreNode(int spr);

```

```

01396     void restoreEdge(int spr);
01397 };
01398
01399 //=====
01400 // end of namespace Grcc
01401 #ifdef GRCC_NAMESPACE
01402 }
01403 #endif

```

4.61 grccparam.h

```

00001 #ifndef GRCC_PARAM_H
00002 #else
00003 #define GRCC_PARAM_H
00004
00005 /* #[ License : */
00006 /*
00007  *   Copyright (C) 2023-2026 T. Kaneko
00008  *   When using this file you are requested to refer to the publication
00009  *   Comput.Phys.Commun. 92 (1995) 127-152
00010  *
00011  *   This file is part of FORM.
00012  *
00013  *   FORM is free software: you can redistribute it and/or modify it under the
00014  *   terms of the GNU General Public License as published by the Free Software
00015  *   Foundation, either version 3 of the License, or (at your option) any later
00016  *   version.
00017  *
00018  *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00019  *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00020  *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00021  *   details.
00022  *
00023  *   You should have received a copy of the GNU General Public License along
00024  *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00025  */
00026 /* #] License : */
00027
00028 /*=====
00029  * Parameters
00030  */
00031 /*
00032 #define GRCC_NAMESPACE
00033 */
00034
00035 #define GRCC_MAXNCPLG      4
00036 #define GRCC_MAXLEGS      10
00037 #define GRCC_MAXMPARTICLES 50
00038 #define GRCC_MAXMINTERACT 500
00039 #define GRCC_MAXSUBPROCS  500
00040 #define GRCC_MAXNODES     20
00041 #define GRCC_MAXEDGES     100
00042 #define GRCC_MAXNSTACK    50
00043 #define GRCC_MAXESTACK    50
00044 #define GRCC_MAXGROUP     1000
00045 #define GRCC_MAXPSLIST    500
00046
00047 #define GRCC_MAXMPARTICLES2 (2*GRCC_MAXMPARTICLES-1)
00048 #define GRCC_MAXFLINES     GRCC_MAXEDGES
00049
00050 #define GRCC_FRACERROR     (1.0e-10)
00051
00052 /* error message */
00053 /*
00054 #define GRCC_Stderr        stderr
00055 */
00056 #define GRCC_Stderr        stdout
00057 /*
00058 #define GRCC_ABORT()      exit(1)
00059 */
00060 #define GRCC_ABORT()      abort()
00061
00062 /*-----
00063  * Constants
00064  */
00065
00066 /* model definition */
00067 #define GRCC_DEFBYNAME     1 /* define interactions by particle name */
00068 #define GRCC_DEFBYCODE     2 /* define interactions by particle code */
00069
00070 /* types of particles */
00071 #define GRCC_PT_Undef      0
00072 #define GRCC_PT_Scalar    1

```

```

00073 #define GRCC_PT_Dirac      2
00074 #define GRCC_PT_Majorana    3
00075 #define GRCC_PT_Vector      4
00076 #define GRCC_PT_Ghost       5
00077 #define GRCC_PT_Size        6
00078
00079 #define GRCC_PTS_Undef      "undef"
00080 #define GRCC_PTS_Scalar     "scalar"
00081 #define GRCC_PTS_Dirac     "dirac"
00082 #define GRCC_PTS_Majorana  "majorana"
00083 #define GRCC_PTS_Vector    "vector"
00084 #define GRCC_PTS_Ghost     "ghost"
00085
00086 #define GRCC_PT_Table { GRCC_PTS_Undef, GRCC_PTS_Scalar, GRCC_PTS_Dirac, GRCC_PTS_Majorana,
    GRCC_PTS_Vector, GRCC_PTS_Ghost}
00087
00088 #define GRCC_PT_GTable { "Undef", "Scalar", "Fermion", "Majorana", "Vector", "Ghost"}
00089
00090 /* for mgraph generation */
00091 #define GRCC_AT_Vertex      0
00092 #define GRCC_AT_External    -1
00093 #define GRCC_AT_Initial     -2
00094 #define GRCC_AT_Final       -3
00095
00096 #define GRCC_AT_NdStr(x)    ((x)>=GRCC_AT_Vertex ?"Vertex":      \
00097                             ((x)==GRCC_AT_External ?"External":  \
00098                             ((x)==GRCC_AT_Final ?"Final":        \
00099                             ((x)==GRCC_AT_Initial ?"Initial": "Undef"))))
00100
00101 /* graph generation */
00102 #define GRCC_MGraph 0      /* mgraph (topology) generation */
00103 #define GRCC_AGraph 1      /* agraph generation */
00104
00105 /* options for graph greeneration */
00106 #define GRCC_OPT_Step      0
00107 #define GRCC_OPT_Outgrf    1
00108 #define GRCC_OPT_Outgrp    2
00109 #define GRCC_OPT_lPI      3
00110 #define GRCC_OPT_NoSelfLoop 4
00111 #define GRCC_OPT_NoTadpole 5
00112 #define GRCC_OPT_NoPtBlock 6
00113 #define GRCC_OPT_No2PtL1PI 7
00114 #define GRCC_OPT_NoExtSelf 8
00115 #define GRCC_OPT_NoAdj2PtV 9
00116 #define GRCC_OPT_Block     10
00117 #define GRCC_OPT_NoMultiEdge 11
00118 #define GRCC_OPT_SymmInitial 12
00119 #define GRCC_OPT_SymmFinal 13
00120 #define GRCC_OPT_Size      14
00121
00122 typedef unsigned long ULong;
00123
00124 typedef struct {
00125     const char *name;
00126     const char *mean;
00127     int defaultv;
00128     int DUMMYPadding;
00129 } OptDef;
00130
00131 typedef struct {
00132     const char *name;
00133     const char *cname;
00134     const char *mean;
00135 } OptQGDef;
00136
00137 typedef struct {
00138     const char *name;
00139     int index;
00140     int sign;
00141 } OptQGRef;
00142
00143 /*-----
00144 * QGRAF options
00145 */
00146 #define GRCC_QGRAF_OPT_ONEPI 0
00147 #define GRCC_QGRAF_OPT_ONSHELL 1
00148 #define GRCC_QGRAF_OPT_NOSIGMA 2
00149 #define GRCC_QGRAF_OPT_NOSNAIL 3
00150 #define GRCC_QGRAF_OPT_NOTADPOLE 4
00151 #define GRCC_QGRAF_OPT_SIMPLE 5
00152 #define GRCC_QGRAF_OPT_BIPART 6
00153 #define GRCC_QGRAF_OPT_CYCLI 7
00154 #define GRCC_QGRAF_OPT_FLOOP 8
00155 //TODO what does this do? Does it work?
00156 // #define GRCC_QGRAF_OPT_TOPOL 9
00157
00158 #ifdef GRCC_QGRAF_OPT_TOPOL

```

```

00159 #define GRCC_QGRAF_OPT_Size      10
00160 #else
00161 #define GRCC_QGRAF_OPT_Size      9
00162 #endif
00163
00164 /*-----
00165  * Conversion of
00166  *   eind : index (ed) of EGraph.edges[ed]
00167  *   sind : value (v) of EGraph.nodes[nd]->edges[j])
00168  */
00169 #define I2Vedge(eind, sign)  (((sign<=0)?(-1):(1))*((eind)+1))
00170 #define V2Iedge(sind)      (abs(sind)-1)
00171 #define V2Ileg(sind)       ((sind)<0 ? 0 : 1)
00172 /*-----
00173  * data types for model definition
00174  */
00175 typedef struct {
00176     const char *name;           /* name of the model */
00177     int defpart;               /* particle is defined by name or code */
00178                                /* GRCC_DEFBYNAME or GRCC_DEFBYCODE */
00179     int ncouple;              /* No. of coupling constants */
00180     const char *cnamlist[GRCC_MAXNCPLG]; /* Names of coupling constants */
00181 } MInput;
00182
00183 typedef struct {
00184     const char *name;          /* name of particle */
00185     const char *aname;         /* name of anti-particle */
00186     int pcode;                /* code of particle */
00187     int acode;                /* code of anti-particle */
00188     const char *ptypen;        /* type : 'GRCC_PTS_Scalar' etc */
00189     int ptypec;               /* type : 'GRCC_PT_Scalar' etc */
00190     int extonly;              /* only as external particle */
00191 } PInput;
00192
00193 typedef struct {
00194     const char *name;          /* name of interaction */
00195     int icode;                /* code of interaction */
00196     int nplstn;               /* the number of legs */
00197     const char *plstn[GRCC_MAXLEGS]; /* list of particle names */
00198     int plistc[GRCC_MAXLEGS]; /* list of particle codes */
00199     int cvallist[GRCC_MAXNCPLG]; /* coupling constants */
00200 } IInput;
00201
00202 /*-----
00203  * data type for node class input
00204  */
00205 typedef struct {
00206     /* used as input to MGraph() and SProcess() */
00207     int cldeg;
00208     int clnum;
00209     int cltyp;
00210     int cmind;
00211     int cmaxd;
00212
00213     /* used as input to SProcess() */
00214     int ptcl;
00215     int cple;
00216 } NCInput;
00217
00218 /*-----
00219  * data types for process definition
00220  */
00221 typedef struct {
00222     long ninitl;              /* the number of initial particles */
00223     const char *initln[GRCC_MAXNODES]; /* list of initial particles (name) */
00224     int initlc[GRCC_MAXNODES]; /* list of final particles (code) */
00225     long nfinal;              /* the number of final particles */
00226     const char *finaln[GRCC_MAXNODES]; /* list of final particles (name) */
00227     int finalc[GRCC_MAXNODES]; /* list of final particles (code) */
00228     int coupl[GRCC_MAXNCPLG]; /* list of orders of c. consts */
00229 } FGInput;
00230
00231 /* class of node : input for SProcess */
00232 typedef struct {
00233     int cdeg;                 /* degree of each node */
00234     int ctyp;                 /* type : GRCC_AT_xxx */
00235     int cnum;                 /* the number of nodes in the class */
00236     int cple;                 /* total order of c.c. of each node */
00237                                /* = 0 for external particle */
00238     const char *pname;        /* particle name defined in the model */
00239                                /* = NULL for vertex */
00240     long pcode;               /* particle code defined in the model */
00241                                /* = 0 for vertex */
00242                                /* long = int + padding */
00243 } PGInput;
00244
00245 /*-----

```

```


00246  * minimum input data to EGraph
00247  */
00248  typedef struct {
00249      int      extloop;    /* external/loop */
00250      int      intrct;     /* particl/interaction */
00251  } DNode;
00252
00253  typedef int  DEdge[2]; /* {node0, node1} */
00254
00255  typedef struct {
00256      int      nnodes;
00257      int      nedges;
00258      DNode    *nodes;
00259      DEdge    *edges;
00260  } DGraph;
00261
00262  /*-----
00263  */
00264  #endif

```

4.62 if.c File Reference

```
#include "form3.h"
```

Include dependency graph for if.c:

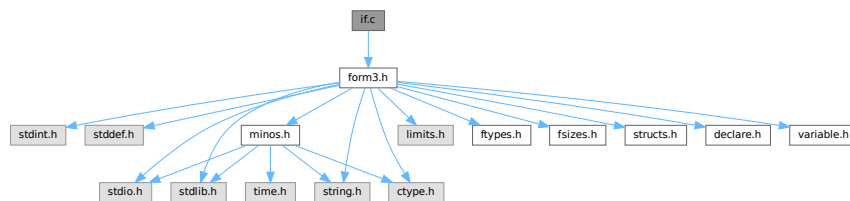

Functions

- WORD [GetIfDollarNum](#) (WORD *ifp, WORD *ifstop)
- int [FindVar](#) (WORD *v, WORD *term)
- int [DolfStatement](#) (PHEAD WORD *ifcode, WORD *term)
- WORD [HowMany](#) (PHEAD WORD *ifcode, WORD *term)
- void [DoubleIfBuffers](#) (void)
- int [DoSwitch](#) (PHEAD WORD *term, WORD *lhs)
- int [DoEndSwitch](#) (PHEAD WORD *term, WORD *lhs)
- SWITCHTABLE * [FindCase](#) (WORD nswitch, WORD ncase)
- int [DoubleSwitchBuffers](#) (void)
- void [SwitchSplitMergeRec](#) (SWITCHTABLE *array, WORD num, SWITCHTABLE *auxarray)
- void [SwitchSplitMerge](#) (SWITCHTABLE *array, WORD num)

4.62.1 Detailed Description

Routines for the dealing with if statements.

Definition in file [if.c](#).

4.62.2 Function Documentation

4.62.2.1 GetIfDollarNum()

```
WORD GetIfDollarNum (
    WORD * ifp,
    WORD * ifstop )
```

Definition at line [106](#) of file [if.c](#).

4.62.2.2 FindVar()

```
int FindVar (
    WORD * v,
    WORD * term )
```

Definition at line [173](#) of file [if.c](#).

4.62.2.3 DolfStatement()

```
int DoIfStatement (
    PHEAD WORD * ifcode,
    WORD * term )
```

Definition at line [280](#) of file [if.c](#).

4.62.2.4 HowMany()

```
WORD HowMany (
    PHEAD WORD * ifcode,
    WORD * term )
```

Definition at line [840](#) of file [if.c](#).

4.62.2.5 DoubleIfBuffers()

```
void DoubleIfBuffers (
    void )
```

Definition at line [1033](#) of file [if.c](#).

4.62.2.6 DoSwitch()

```
int DoSwitch (
    PHEAD WORD * term,
    WORD * lhs )
```

Definition at line [1070](#) of file [if.c](#).

4.62.2.7 DoEndSwitch()

```
int DoEndSwitch (
    PHEAD WORD * term,
    WORD * lhs )
```

Definition at line 1086 of file [if.c](#).

4.62.2.8 FindCase()

```
SWITCHTABLE * FindCase (
    WORD nswitch,
    WORD ncase )
```

Definition at line 1097 of file [if.c](#).

4.62.2.9 DoubleSwitchBuffers()

```
int DoubleSwitchBuffers (
    void )
```

Definition at line 1135 of file [if.c](#).

4.62.2.10 SwitchSplitMergeRec()

```
void SwitchSplitMergeRec (
    SWITCHTABLE * array,
    WORD num,
    SWITCHTABLE * auxarray )
```

Definition at line 1184 of file [if.c](#).

4.62.2.11 SwitchSplitMerge()

```
void SwitchSplitMerge (
    SWITCHTABLE * array,
    WORD num )
```

Definition at line 1213 of file [if.c](#).

4.63 if.c

[Go to the documentation of this file.](#)

```

00001
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 *   When using this file you are requested to refer to the publication
00009 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 *   This is considered a matter of courtesy as the development was paid
00011 *   for by FOM the Dutch physics granting agency and we would like to
00012 *   be able to track its scientific use to convince FOM of its value
00013 *   for the community.
00014 *
00015 *   This file is part of FORM.
00016 *
00017 *   FORM is free software: you can redistribute it and/or modify it under the
00018 *   terms of the GNU General Public License as published by the Free Software
00019 *   Foundation, either version 3 of the License, or (at your option) any later
00020 *   version.
00021 *
00022 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 *   details.
00026 *
00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[ License : */
00031 /*
00032     #[ Includes : if.c
00033 */
00034
00035 #include "form3.h"
00036
00037 /*
00038     #[ Includes :
00039     #[ If statement :
00040         #[ Syntax :
00041
00042         The `if' is a conglomerate of statements: if,else,endif
00043
00044         The if consists in principle of:
00045
00046         if ( number );
00047             statements
00048         else;
00049             statements
00050         endif;
00051
00052         The first set is taken when number != 0.
00053         The else is not mandatory.
00054         TRUE = 1 and FALSE = 0
00055
00056         The number can be built up via a logical expression:
00057
00058             expr1 condition expr2
00059
00060         each expression can be a subexpression again. It has to be
00061         enclosed in parentheses in that case.
00062         Conditions are:
00063             >, >=, <, <=, ==, !=, ||, &&
00064
00065         When Expressions are chained evaluation is from left to right,
00066         independent of whether this indicates nonsense.
00067         if ( a || b || c || d ); is a perfectly normal statement.
00068         if ( a >= b || c == d ); would be messed up. This should be:
00069         if ( ( a >= b ) || ( c == d ) );
00070
00071         The building blocks of the Expressions are:
00072
00073             Match(option,pattern)   The number of times pattern fits in term_
00074             Count(...)              The count value of term_
00075             Coeff[icient]           The coefficient of term_
00076             FindLoop(options)       Are there loops (as in ReplaceLoop).
00077
00078         Implementation for internal notation:
00079
00080         TYPEIF,length,gotolevel(if fail),EXPRTYPE,length,.....
00081
00082         EXPRTYPE can be:
00083             SHORTNUMBER             ->,4,sign,size
00084             LONGNUMBER              ->,|ncoef+2|,ncoef,numer,denom
00085             MATCH                   ->,patternsiz+3,keyword,pattern

```

```

00086      MULTIPLEOF      ->,3,thenumber
00087      COUNT           ->,countsiz+2,countinfo
00088      TYPEFINDLOOP    ->,7 (findloop info)
00089      COEFFICIENT      ->,2
00090      IFDOLLAR         ->,3,dollarnumber
00091      SUBEXPR         ->,size,dummy,size1,EXPRTYPE,length,...
00092                      ,2,condition1,size2,...
00093                      This is like functions.
00094
00095      Note that there must be a restriction to the number of nestings
00096      of parentheses in an if statement. It has been set to 10.
00097
00098      The syntax of match corresponds to the syntax of the left side
00099      of an id statement. The only difference is the keyword
00100      MATCH vs TYPEIDNEW.
00101
00102      #] Syntax :
00103      #[ GetIfDollarNum :
00104  */
00105
00106  WORD GetIfDollarNum(WORD *ifp, WORD *ifstop)
00107  {
00108      DOLLARS d;
00109      WORD num, *w;
00110      if ( ifp[2] < 0 ) { return(-ifp[2]-1); }
00111      d = Dollars+ifp[2];
00112      if ( ifp+3 < ifstop && ifp[3] == IFDOLLAREXTRA ) {
00113          if ( d->nfactors == 0 ) {
00114              MLOCK(ErrorMessageLock);
00115              MesPrint("Attempt to use a factor of an unfactored $-variable");
00116              MUNLOCK(ErrorMessageLock);
00117              Terminate(-1);
00118          }
00119          num = GetIfDollarNum(ifp+3,ifstop);
00120          if ( num > d->nfactors ) {
00121              MLOCK(ErrorMessageLock);
00122              MesPrint("Dollar factor number %s out of range",num);
00123              MUNLOCK(ErrorMessageLock);
00124              Terminate(-1);
00125          }
00126          if ( num == 0 ) {
00127              return(d->nfactors);
00128          }
00129          w = d->factors[num-1].where;
00130          if ( w == 0 ) return(d->factors[num].value);
00131      getnumber:;
00132          if ( *w == 0 ) return(0);
00133          if ( *w == 4 && w[3] == 3 && w[2] == 1 && w[1] < MAXPOSITIVE && w[4] == 0 ) {
00134              return(w[1]);
00135          }
00136          if ( ( w[w[0]] != 0 ) || ( ABS(w[w[0]-1]) != w[0]-1 ) ) {
00137              MLOCK(ErrorMessageLock);
00138              MesPrint("Dollar factor number expected but found expression");
00139              MUNLOCK(ErrorMessageLock);
00140              Terminate(-1);
00141          }
00142          else {
00143              MLOCK(ErrorMessageLock);
00144              MesPrint("Dollar factor number out of range");
00145              MUNLOCK(ErrorMessageLock);
00146              Terminate(-1);
00147          }
00148          return(0);
00149      }
00150  /*
00151      Now we have just a dollar and should evaluate that into a short number
00152  */
00153      if ( d->type == DOLZERO ) {
00154          return(0);
00155      }
00156      else if ( d->type == DOLNUMBER || d->type == DOLTERMS ) {
00157          w = d->where; goto getnumber;
00158      }
00159      else {
00160          MLOCK(ErrorMessageLock);
00161          MesPrint("Dollar factor number is wrong type");
00162          MUNLOCK(ErrorMessageLock);
00163          Terminate(-1);
00164          return(0);
00165      }
00166  }
00167
00168  /*
00169      #] GetIfDollarNum :
00170      #[ FindVar :
00171  */
00172

```

```

00173 int FindVar(WORD *v, WORD *term)
00174 {
00175     WORD *t, *tstop, *m, *mstop, *f, *fstop, *a, *astop;
00176     GETSTOP(term,tstop);
00177     t = term+1;
00178     while ( t < tstop ) {
00179         if ( *v == *t && *v < FUNCTION ) { /* VECTOR, INDEX, SYMBOL, DOTPRODUCT */
00180             switch ( *v ) {
00181                 case SYMBOL:
00182                     m = t+2; mstop = t+t[1];
00183                     while ( m < mstop ) {
00184                         if ( *m == v[1] ) return(1);
00185                         m += 2;
00186                     }
00187                     break;
00188                 case INDEX:
00189                 case VECTOR:
00190 InVe:
00191                     m = t+2; mstop = t+t[1];
00192                     while ( m < mstop ) {
00193                         if ( *m == v[1] ) return(1);
00194                         m++;
00195                     }
00196                     break;
00197                 case DOTPRODUCT:
00198                     m = t+2; mstop = t+t[1];
00199                     while ( m < mstop ) {
00200                         if ( *m == v[1] && m[1] == v[2] ) return(1);
00201                         if ( *m == v[2] && m[1] == v[1] ) return(1);
00202                         m += 3;
00203                     }
00204                     break;
00205             }
00206         }
00207         else if ( *v == VECTOR && *t == INDEX ) goto InVe;
00208         else if ( *v == INDEX && *t == VECTOR ) goto InVe;
00209         else if ( ( *v == VECTOR || *v == INDEX ) && *t == DOTPRODUCT ) {
00210             m = t+2; mstop = t+t[1];
00211             while ( m < mstop ) {
00212                 if ( v[1] == m[0] || v[1] == m[1] ) return(1);
00213                 m += 3;
00214             }
00215         }
00216         else if ( *t >= FUNCTION ) {
00217             if ( *v == FUNCTION && v[1] == *t ) return(1);
00218             if ( functions[*t-FUNCTION].spec > 0 ) {
00219                 if ( *v == VECTOR || *v == INDEX ) { /* we need to check arguments */
00220                     int i;
00221                     for ( i = FUNHEAD; i < t[1]; i++ ) {
00222                         if ( v[1] == t[i] ) return(1);
00223                     }
00224                 }
00225             }
00226         }
00227         else {
00228             fstop = t + t[1]; f = t + FUNHEAD;
00229             while ( f < fstop ) { /* Do the arguments one by one */
00230                 if ( *f <= 0 ) {
00231                     switch ( *f ) {
00232                         case -SYMBOL:
00233                             if ( *v == SYMBOL && v[1] == f[1] ) return(1);
00234                             f += 2;
00235                             break;
00236                         case -VECTOR:
00237                         case -MINVECTOR:
00238                         case -INDEX:
00239                             if ( ( *v == VECTOR || *v == INDEX )
00240                                 && ( v[1] == f[1] ) ) return(1);
00241                             f += 2;
00242                             break;
00243                         case -SNUMBER:
00244                             f += 2;
00245                             break;
00246                         default:
00247                             if ( *v == FUNCTION && v[1] == -*f && *f <= -FUNCTION ) return(1);
00248                             if ( *f <= -FUNCTION ) f++;
00249                             else f += 2;
00250                             break;
00251                     }
00252                 }
00253                 else {
00254                     a = f + ARGHEAD; astop = f + *f;
00255                     while ( a < astop ) {
00256                         if ( FindVar(v,a) == 1 ) return(1);
00257                         a += *a;
00258                     }
00259                     f = astop;
00260                 }
00261             }
00262         }
00263     }
00264 }

```

```

00260     }
00261     }
00262     }
00263     t += t[1];
00264 }
00265 return(0);
00266 }
00267
00268 /*
00269     #] FindVar :
00270     #[ DoIfStatement :          WORD DoIfStatement(PHEAD ifcode,term)
00271
00272     The execution time part of the if-statement.
00273     The arguments are a pointer to the TYPEIF and a pointer to the term.
00274     The answer is either 1 (success) or 0 (fail).
00275     The calling routine can figure out where to go in case of failure
00276     by picking up gotolevel.
00277     Note that the whole setup asks for recursions.
00278 */
00279
00280 int DoIfStatement(PHEAD WORD *ifcode, WORD *term)
00281 {
00282     GETBIDENTITY
00283     WORD *ifstop, *ifp;
00284     UWORD *coef1 = 0, *coef2, *coef3, *cc;
00285     WORD ncoef1, ncoef2, ncoef3, i = 0, first, *r, acoef, ismull, ismul2, j;
00286     UWORD *Spac1, *Spac2;
00287     ifstop = ifcode + ifcode[1];
00288     ifp = ifcode + 3;
00289     if ( ifp >= ifstop ) return(1);
00290     if ( ( ifp + ifp[1] ) >= ifstop ) {
00291         switch ( *ifp ) {
00292             case LONGNUMBER:
00293                 if ( ifp[2] ) return(1);
00294                 else return(0);
00295             case MATCH:
00296             case TYPEIF:
00297                 if ( HowMany(BHEAD ifp,term) ) return(1);
00298                 else return(0);
00299             case TYPEFINDLOOP:
00300                 if ( Lus(term,ifp[3],ifp[4],ifp[5],ifp[6],ifp[2]) ) return(1);
00301                 else return(0);
00302             case TYPECOUNT:
00303                 if ( CountDo(term,ifp) ) return(1);
00304                 else return(0);
00305             case COEFFI:
00306             case MULTIPLEOF:
00307                 return(1);
00308             case IFDOLLAR:
00309                 {
00310                     DOLLARS d = Dollars + ifp[2];
00311 #ifdef WITHPTHREADS
00312                     int nummodopt, dtype = -1;
00313                     if ( AS.MultiThreaded ) {
00314                         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00315                             if ( ifp[2] == ModOptdollars[nummodopt].number ) break;
00316                         }
00317                         if ( nummodopt < NumModOptdollars ) {
00318                             dtype = ModOptdollars[nummodopt].type;
00319                             if ( dtype == MODLOCAL ) {
00320                                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
00321                             }
00322                         }
00323                     }
00324                     dtype = d->type;
00325 #else
00326                     int dtype = d->type; /* We use dtype to make the operation atomic */
00327 #endif
00328                     if ( dtype == DOLZERO ) return(0);
00329                     if ( dtype == DOLUNDEFINED ) {
00330                         if ( AC.UnsureDollarMode == 0 ) {
00331                             MesPrint("$%s is undefined",AC.dollarnames->namebuffer+d->name);
00332                             Terminate(-1);
00333                         }
00334                     }
00335                 }
00336                 return(1);
00337             case IFEXPRESSION:
00338                 r = ifp+2; j = ifp[1] - 2;
00339                 while ( --j >= 0 ) {
00340                     if ( *r == AR.CurExpr ) return(1);
00341                     r++;
00342                 }
00343                 return(0);
00344             case IFISFACTORIZED:
00345                 r = ifp+2; j = ifp[1] - 2;
00346                 if ( j == 0 ) {

```

```

00347         if ( ( Expressions[AR.CurExpr].vflags & ISFACTORIZED ) != 0 )
00348             return(1);
00349         else
00350             return(0);
00351     }
00352     while ( --j >= 0 ) {
00353         if ( ( Expressions[*r].vflags & ISFACTORIZED ) == 0 ) return(0);
00354         r++;
00355     }
00356     return(1);
00357 case IFOCCURS:
00358     {
00359         WORD *OccStop = ifp + ifp[1];
00360         ifp += 2;
00361         while ( ifp < OccStop ) {
00362             if ( FindVar(ifp,term) == 1 ) return(1);
00363             if ( *ifp == DOTPRODUCT ) ifp += 3;
00364             else ifp += 2;
00365         }
00366     }
00367     return(0);
00368 case IFUSERFLAG:
00369     if ( ( Expressions[AR.CurExpr].uflags & (1 << ifp[2]) ) != 0 )
00370         return(1);
00371     return(0);
00372 default:
00373     /*
00374         Now we have a subexpression. Test first for one with a single item.
00375     */
00376     if ( ifp[3] == ( ifp[1] + 3 ) ) return(DoIfStatement(BHEAD ifp,term));
00377     ifstop = ifp + ifp[1];
00378     ifp += 3;
00379     break;
00380 }
00381 }
00382 /*
00383 Here is the composite condition.
00384 */
00385 coef3 = NumberMalloc("DoIfStatement");
00386 Spac1 = NumberMalloc("DoIfStatement");
00387 Spac2 = (UWORD *) (TermMalloc("DoIfStatement"));
00388 ncoef1 = 0; first = 1; ismull = 0;
00389 do {
00390     if ( !first ) {
00391         ifp += 2;
00392         if ( ifp[-2] == ORCOND && ncoef1 ) {
00393             coef1 = Spac1;
00394             ncoef1 = 1; coef1[0] = coef1[1] = 1;
00395             goto SkipCond;
00396         }
00397         if ( ifp[-2] == ANDCOND && !ncoef1 ) goto SkipCond;
00398     }
00399     coef2 = Spac2;
00400     ncoef2 = 1;
00401     ismul2 = 0;
00402     switch ( *ifp ) {
00403     case LONGNUMBER:
00404         ncoef2 = ifp[2];
00405         j = 2*(ABS(ncoef2));
00406         cc = (UWORD *) (ifp + 3);
00407         for ( i = 0; i < j; i++ ) coef2[i] = cc[i];
00408         break;
00409 #ifdef WITHFLOAT
00410     case IFFLOATNUMBER:
00411         /*
00412             The sloppy solution is: Convert to rational.
00413             This way we can write it over coef2,ncoef2
00414         */
00415         ncoef2 = FloatFunToRat(BHEAD coef2,ifp);
00416         break;
00417 #endif
00418     case MATCH:
00419     case TYPEIF:
00420         coef2[0] = HowMany(BHEAD ifp,term);
00421         coef2[1] = 1;
00422         if ( coef2[0] == 0 ) ncoef2 = 0;
00423         break;
00424     case TYPECOUNT:
00425         acoef = CountDo(term,ifp);
00426         coef2[0] = ABS(acoef);
00427         coef2[1] = 1;
00428         if ( acoef == 0 ) ncoef2 = 0;
00429         else if ( acoef < 0 ) ncoef2 = -1;
00430         break;
00431     case TYPEFINDLOOP:
00432         acoef = Lus(term,ifp[3],ifp[4],ifp[5],ifp[6],ifp[2]);
00433         coef2[0] = ABS(acoef);

```

```

00434         coef2[1] = 1;
00435         if ( acoef == 0 ) ncoef2 = 0;
00436         else if ( acoef < 0 ) ncoef2 = -1;
00437         break;
00438     case COEFFI:
00439         r = term + *term;
00440         ncoef2 = r[-1];
00441         i = ABS(ncoef2);
00442         cc = (UWORD *) (r - i);
00443         if ( ncoef2 < 0 ) ncoef2 = (ncoef2+1)»1;
00444         else ncoef2 = (ncoef2-1)»1;
00445         i--; for ( j = 0; j < i; j++ ) coef2[j] = cc[j];
00446         break;
00447     case SUBEXPR:
00448         ncoef2 = coef2[0] = DoIfStatement(BHEAD ifp,term);
00449         coef2[1] = 1;
00450         break;
00451     case MULTIPLEOF:
00452         ncoef2 = 1;
00453         coef2[0] = ifp[2];
00454         coef2[1] = 1;
00455         ismul2 = 1;
00456         break;
00457     case IFDOLLAREXTRA:
00458         break;
00459     case IFDOLLAR:
00460         {
00461         /*
00462             We need to abstract a long rational in coef2
00463             with length ncoef2. What if that cannot be done?
00464         */
00465             DOLLARS d = Dollars + ifp[2];
00466 #ifdef WITHPTHREADS
00467             int nummodopt, dtype = -1;
00468             if ( AS.MultiThreaded ) {
00469                 for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00470                     if ( ifp[2] == ModOptdollars[nummodopt].number ) break;
00471                 }
00472                 if ( nummodopt < NumModOptdollars ) {
00473                     dtype = ModOptdollars[nummodopt].type;
00474                     if ( dtype == MODLOCAL ) {
00475                         d = ModOptdollars[nummodopt].dstruct+AT.identity;
00476                     }
00477                     else {
00478                         LOCK(d->pthreadlockread);
00479                     }
00480                 }
00481             }
00482 #endif
00483         /*
00484             We have to pick up the IFDOLLAREXTRA pieces for [1], [$y] etc.
00485         */
00486         if ( ifp+3 < ifstop && ifp[3] == IFDOLLAREXTRA ) {
00487             if ( d->nfactors == 0 ) {
00488                 MLOCK(ErrorMessageLock);
00489                 MesPrint("Attempt to use a factor of an unfactored $-variable");
00490                 MUNLOCK(ErrorMessageLock);
00491                 Terminate(-1);
00492             }
00493             WORD num = GetIfDollarNum(ifp+3,ifstop);
00494             WORD *w;
00495             while ( ifp+3 < ifstop && ifp[3] == IFDOLLAREXTRA ) ifp += 3;
00496             if ( num > d->nfactors ) {
00497                 MLOCK(ErrorMessageLock);
00498                 MesPrint("Dollar factor number %s out of range",num);
00499                 MUNLOCK(ErrorMessageLock);
00500                 Terminate(-1);
00501             }
00502             if ( num == 0 ) {
00503                 ncoef2 = 1; coef2[0] = d->nfactors; coef2[1] = 1;
00504                 break;
00505             }
00506             w = d->factors[num-1].where;
00507             if ( w == 0 ) {
00508                 if ( d->factors[num-1].value < 0 ) {
00509                     ncoef2 = -1; coef2[0] = -d->factors[num-1].value; coef2[1] = 1;
00510                 }
00511                 else {
00512                     ncoef2 = 1; coef2[0] = d->factors[num-1].value; coef2[1] = 1;
00513                 }
00514                 break;
00515             }
00516             if ( w[*w] == 0 ) {
00517                 r = w + *w - 1;
00518                 i = ABS(*r);
00519                 if ( i == ( *w-1 ) ) {
00520                     ncoef2 = (i-1)/2;

```

```

00521             if ( *r < 0 ) ncoef2 = -ncoef2;
00522             i--; cc = coef2; r = w + 1;
00523             while ( --i >= 0 ) *cc++ = (UWORD) (*r++);
00524             break;
00525         }
00526     }
00527     goto generic;
00528 }
00529 }
00530 else {
00531     switch ( d->type ) {
00532     case DOLUNDEFINED:
00533         if ( AC.UnsureDollarMode == 0 ) {
00534             #ifdef WITHPTHREADS
00535                 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00536             #endif
00537             MLOCK(ErrorMessageLock);
00538             MesPrint("%s is undefined", AC.dollarnames->namebuffer+d->name);
00539             MUNLOCK(ErrorMessageLock);
00540             Terminate(-1);
00541         }
00542         ncoef2 = 0; coef2[0] = 0; coef2[1] = 1;
00543         break;
00544     case DOLZERO:
00545         ncoef2 = coef2[0] = 0; coef2[1] = 1;
00546         break;
00547     case DOLSUBTERM:
00548         if ( d->where[0] != INDEX || d->where[1] != 3
00549             || d->where[2] < 0 || d->where[2] >= AM.OffsetIndex ) {
00550             if ( AC.UnsureDollarMode == 0 ) {
00551                 #ifdef WITHPTHREADS
00552                     if ( dtype > 0 && dtype != MODLOCAL ) {
00553                         UNLOCK(d->pthreadlockread); }
00554                 #endif
00555                 MLOCK(ErrorMessageLock);
00556                 MesPrint("%s is of wrong
00557 type", AC.dollarnames->namebuffer+d->name);
00558                 MUNLOCK(ErrorMessageLock);
00559                 Terminate(-1);
00560             }
00561             ncoef2 = 0; coef2[0] = 0; coef2[1] = 1;
00562             break;
00563             /* fall through */
00564         case DOLINDEX:
00565             if ( d->index == 0 ) {
00566                 ncoef2 = coef2[0] = 0; coef2[1] = 1;
00567             }
00568             else if ( d->index > 0 && d->index < AM.OffsetIndex ) {
00569                 ncoef2 = 1; coef2[0] = d->index; coef2[1] = 1;
00570             }
00571             else if ( AC.UnsureDollarMode == 0 ) {
00572                 #ifdef WITHPTHREADS
00573                     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00574                 #endif
00575                 MLOCK(ErrorMessageLock);
00576                 MesPrint("%s is of wrong type", AC.dollarnames->namebuffer+d->name);
00577                 MUNLOCK(ErrorMessageLock);
00578                 Terminate(-1);
00579             }
00580             ncoef2 = coef2[0] = 0; coef2[1] = 1;
00581             break;
00582         case DOLWILDARGS:
00583             if ( d->where[0] <= -FUNCTION ||
00584                 ( d->where[0] < 0 && d->where[2] != 0 )
00585                 || ( d->where[0] > 0 && d->where[d->where[0]] != 0 )
00586             ) {
00587                 if ( AC.UnsureDollarMode == 0 ) {
00588                     #ifdef WITHPTHREADS
00589                         if ( dtype > 0 && dtype != MODLOCAL ) {
00590                             UNLOCK(d->pthreadlockread); }
00591                     #endif
00592                     MLOCK(ErrorMessageLock);
00593                     MesPrint("%s is of wrong
00594 type", AC.dollarnames->namebuffer+d->name);
00595                     MUNLOCK(ErrorMessageLock);
00596                     Terminate(-1);
00597                 }
00598                 ncoef2 = coef2[0] = 0; coef2[1] = 1;
00599                 break;
00600             }
00601             /* fall through */
00602         case DOLARGUMENT:
00603             if ( d->where[0] == -SNUMBER ) {
00604                 if ( d->where[1] == 0 ) {
00605                     ncoef2 = coef2[0] = 0;

```



```

00604         }
00605         else if ( d->where[1] < 0 ) {
00606             ncoef2 = -1;
00607             coef2[0] = -d->where[1];
00608         }
00609         else {
00610             ncoef2 = 1;
00611             coef2[0] = d->where[1];
00612         }
00613         coef2[1] = 1;
00614     }
00615     else if ( d->where[0] == -INDEX
00616     && d->where[1] >= 0 && d->where[1] < AM.OffsetIndex ) {
00617         if ( d->where[1] == 0 ) {
00618             ncoef2 = coef2[0] = 0; coef2[1] = 1;
00619         }
00620         else {
00621             ncoef2 = 1; coef2[0] = d->where[1];
00622             coef2[1] = 1;
00623         }
00624     }
00625     else if ( d->where[0] > 0
00626     && d->where[ARGHEAD] == (d->where[0]-ARGHEAD)
00627     && ABS(d->where[d->where[0]-1]) ==
00628         (d->where[0] - ARGHEAD-1) ) {
00629         i = d->where[d->where[0]-1];
00630         ncoef2 = (ABS(i)-1)/2;
00631         if ( i < 0 ) { ncoef2 = -ncoef2; i = -i; }
00632         i--; cc = coef2; r = d->where + ARGHEAD+1;
00633         while ( --i >= 0 ) *cc++ = (UWORD)(*r++);
00634     }
00635     else {
00636         if ( AC.UnsureDollarMode == 0 ) {
00637             #ifdef WITHPTHREADS
00638                 if ( dtype > 0 && dtype != MODLOCAL ) {
00639                     UNLOCK(d->pthreadlockread); }
00640             #endif
00641             MLOCK(ErrorMessageLock);
00642             MesPrint("%s is of wrong
00643 type",AC.dollarnames->namebuffer+d->name);
00644             MUNLOCK(ErrorMessageLock);
00645             Terminate(-1);
00646             ncoef2 = 0; coef2[0] = 0; coef2[1] = 1;
00647         }
00648         break;
00649     case DOLNUMBER:
00650     case DOLTERMS:
00651         if ( d->where[d->where[0]] == 0 ) {
00652             r = d->where + d->where[0]-1;
00653             i = ABS(*r);
00654             if ( i == ( d->where[0]-1 ) ) {
00655                 ncoef2 = (i-1)/2;
00656                 if ( *r < 0 ) ncoef2 = -ncoef2;
00657                 i--; cc = coef2; r = d->where + 1;
00658                 while ( --i >= 0 ) *cc++ = (UWORD)(*r++);
00659                 break;
00660             }
00661         }
00662         generic::
00663         if ( AC.UnsureDollarMode == 0 ) {
00664             #ifdef WITHPTHREADS
00665                 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00666             #endif
00667             MLOCK(ErrorMessageLock);
00668             MesPrint("%s is of wrong type",AC.dollarnames->namebuffer+d->name);
00669             MUNLOCK(ErrorMessageLock);
00670             Terminate(-1);
00671             ncoef2 = 0; coef2[0] = 0; coef2[1] = 1;
00672             break;
00673         }
00674     }
00675     #ifdef WITHPTHREADS
00676     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00677     #endif
00678     }
00679     break;
00680 case IFEXPRESSION:
00681     r = ifp+2; j = ifp[1] - 2; ncoef2 = 0;
00682     while ( --j >= 0 ) {
00683         if ( *r == AR.CurExpr ) { ncoef2 = 1; break; }
00684         r++;
00685     }
00686     coef2[0] = ncoef2;
00687     coef2[1] = 1;
00688     break;

```

```

00689         case IFISFACTORIZED:
00690             r = ifp+2; j = ifp[1] - 2;
00691             if ( j == 0 ) {
00692                 ncoef2 = 0;
00693                 if ( ( Expressions[AR.CurExpr].vflags & ISFACTORIZED ) != 0 ) {
00694                     ncoef2 = 1;
00695                 }
00696             }
00697             else {
00698                 ncoef2 = 1;
00699                 while ( --j >= 0 ) {
00700                     if ( ( Expressions[*r].vflags & ISFACTORIZED ) == 0 ) {
00701                         ncoef2 = 0;
00702                         break;
00703                     }
00704                     r++;
00705                 }
00706             }
00707             coef2[0] = ncoef2;
00708             coef2[1] = 1;
00709             break;
00710         case IFOCCURS:
00711             {
00712                 WORD *OccStop = ifp + ifp[1], *ifpp = ifp+2;
00713                 ncoef2 = 0;
00714                 while ( ifpp < OccStop ) {
00715                     if ( FindVar(ifpp,term) == 1 ) {
00716                         ncoef2 = 1; break;
00717                     }
00718                     if ( *ifpp == DOTPRODUCT ) ifp += 3;
00719                     else ifpp += 2;
00720                 }
00721                 coef2[0] = ncoef2;
00722                 coef2[1] = 1;
00723             }
00724             break;
00725         case IFUSERFLAG:
00726             {
00727                 ncoef2 = 0;
00728                 if ( ( Expressions[AR.CurExpr].uflags & (1 « ifp[2]) ) != 0 )
00729                     ncoef2 = 1;
00730                 coef2[0] = ncoef2;
00731                 coef2[1] = 1;
00732             }
00733             break;
00734         default:
00735             break;
00736     }
00737     if ( !first ) {
00738         if ( ifp[-2] != ORCOND && ifp[-2] != ANDCOND ) {
00739             if ( ( ifp[-2] == EQUAL || ifp[-2] == NOTEQUAL ) &&
00740                 ( ismul2 || ismul1 ) ) {
00741                 if ( ismul1 && ismul2 ) {
00742                     if ( coef1[0] == coef2[0] ) i = 1;
00743                     else i = 0;
00744                 }
00745                 else {
00746                     if ( ismul1 ) {
00747                         if ( ncoef2 )
00748                             Divvy(BHEAD coef2,&ncoef2,coef1,ncoef1);
00749                         cc = coef2; ncoef3 = ncoef2;
00750                     }
00751                     else {
00752                         if ( ncoef1 )
00753                             Divvy(BHEAD coef1,&ncoef1,coef2,ncoef2);
00754                         cc = coef1; ncoef3 = ncoef1;
00755                     }
00756                     if ( ncoef3 < 0 ) ncoef3 = -ncoef3;
00757                     if ( ncoef3 == 0 ) {
00758                         if ( ifp[-2] == EQUAL ) i = 1;
00759                         else i = 0;
00760                     }
00761                     else if ( cc[ncoef3] != 1 ) {
00762                         if ( ifp[-2] == EQUAL ) i = 0;
00763                         else i = 1;
00764                     }
00765                     else {
00766                         for ( j = 1; j < ncoef3; j++ ) {
00767                             if ( cc[ncoef3+j] != 0 ) break;
00768                         }
00769                         if ( j < ncoef3 ) {
00770                             if ( ifp[-2] == EQUAL ) i = 0;
00771                             else i = 1;
00772                         }
00773                         else if ( ifp[-2] == EQUAL ) i = 1;
00774                         else i = 0;
00775                     }
00776                 }
00777             }

```

```

00776         }
00777         goto donemul;
00778     }
00779     else if ( AddRat(BHEAD coef1,ncoef1,coef2,-ncoef2,coef3,&ncoef3) ) {
00780         TermFree(Spac2,"DoIfStatement"); NumberFree(Spac1,"DoIfStatement");
00781         MesCall("DoIfStatement"); return(-1);
00782     }
00783     switch ( ifp[-2] ) {
00784     case GREATER:
00785         if ( ncoef3 > 0 ) i = 1;
00786         else i = 0;
00787         break;
00788     case GREATEREQUAL:
00789         if ( ncoef3 >= 0 ) i = 1;
00790         else i = 0;
00791         break;
00792     case LESS:
00793         if ( ncoef3 < 0 ) i = 1;
00794         else i = 0;
00795         break;
00796     case LESSEQUAL:
00797         if ( ncoef3 <= 0 ) i = 1;
00798         else i = 0;
00799         break;
00800     case EQUAL:
00801         if ( ncoef3 == 0 ) i = 1;
00802         else i = 0;
00803         break;
00804     case NOTEQUAL:
00805         if ( ncoef3 != 0 ) i = 1;
00806         else i = 0;
00807         break;
00808     }
00809 donemul:    if ( i ) { ncoef2 = 1; coef2 = Spac2; coef2[0] = coef2[1] = 1; }
00810             else ncoef2 = 0;
00811             ismul1 = ismul2 = 0;
00812         }
00813     }
00814     else {
00815         first = 0;
00816     }
00817     coef1 = Spac1;
00818     i = 2*ABS(ncoef2);
00819     for ( j = 0; j < i; j++ ) coef1[j] = coef2[j];
00820     ncoef1 = ncoef2;
00821 SkipCond:
00822     ifp += ifp[1];
00823     } while ( ifp < ifstop );
00824
00825     NumberFree(coef3,"DoIfStatement"); NumberFree(Spac1,"DoIfStatement");
00826     TermFree(Spac2,"DoIfStatement");
00827     if ( ncoef1 ) return(1);
00828     else return(0);
00829 }
00830 /*
00831 #] DoIfStatement :
00832 #[ HowMany : WORD HowMany(ifcode,term)
00833
00834 Returns the number of times that the pattern in ifcode
00835 can be taken out from term. There is a subkey in ifcode[2];
00836 The notation is identical to the lhs of an id statement.
00837 Most of the code comes from TestMatch.
00838 */
00839
00840 WORD HowMany(PHEAD WORD *ifcode, WORD *term)
00841 {
00842     GETBIDENTITY
00843     WORD *m, *t, *r, *w, power, RetVal, i, topje, *newterm;
00844     WORD *OldWork, *ww, *mm;
00845     int *RepSto, RepVal;
00846     int numdollars = 0;
00847     m = ifcode + IDHEAD;
00848     AN.FullProto = m;
00849     AN.WildValue = w = m + SUBEXPSIZE;
00850     m += m[1];
00851     AN.WildStop = m;
00852     OldWork = AT.WorkPointer;
00853     if ( ( ifcode[4] & 1 ) != 0 ) { /* We have at least one dollar in the pattern */
00854         AR.Eside = LHSIDEX;
00855         ww = AT.WorkPointer; i = m[0]; mm = m;
00856         NCOPY(ww,mm,i);
00857         *OldWork += 3;
00858         *ww++ = 1; *ww++ = 1; *ww++ = 3;
00859         AT.WorkPointer = ww;
00860         RepSto = AN.RepPoint;

```

```

00861     RepVal = *RepSto;
00862     NewSort(BHEAD0);
00863     if ( Generator(BHEAD OldWork,AR.Cnumlhs) ) {
00864         LowerSortLevel();
00865         *RepSto = RepVal;
00866         AN.RepPoint = RepSto;
00867         AT.WorkPointer = OldWork;
00868         return(-1);
00869     }
00870     AT.WorkPointer = ww;
00871     if ( EndSort(BHEAD ww,0) < 0 ) {}
00872     *RepSto = RepVal;
00873     AN.RepPoint = RepSto;
00874     if ( *ww == 0 || *(ww+ww) != 0 ) {
00875         if ( AP.lhdollarerror == 0 ) {
00876             MLOCK(ErrorMessageLock);
00877             MesPrint("&LHS must be one term");
00878             MUNLOCK(ErrorMessageLock);
00879             AP.lhdollarerror = 1;
00880         }
00881         AT.WorkPointer = OldWork;
00882         return(-1);
00883     }
00884     m = ww; AT.WorkPointer = ww = m + *m;
00885     if ( m[*m-1] < 0 ) { m[*m-1] = -m[*m-1]; }
00886     *m -= m[*m-1];
00887     AR.Eside = RHSIDE;
00888 }
00889 else {
00890     ww = term + *term;
00891     if ( AT.WorkPointer < ww ) AT.WorkPointer = ww;
00892 }
00893 ClearWild(BHEAD0);
00894 while ( w < AN.WildStop ) {
00895     if ( *w == LOADDOLLAR ) numdollars++;
00896     w += w[1];
00897 }
00898 AN.RepFunNum = 0;
00899 AN.RepFunList = AT.WorkPointer;
00900 AT.WorkPointer = (WORD *)((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
00901 topje = cbuf[AT.ebufnum].numrhs;
00902 if ( AT.WorkPointer >= AT.WorkTop ) {
00903     MLOCK(ErrorMessageLock);
00904     MesWork();
00905     MUNLOCK(ErrorMessageLock);
00906     return(-1);
00907 }
00908 AN.DisOrderFlag = ifcode[2] & SUBDISORDER;
00909 switch ( ifcode[2] & (~SUBDISORDER) ) {
00910     case SUBONLY :
00911         /* Must be an exact match */
00912         AN.UseFindOnly = 1; AN.ForFindOnly = 0;
00913     /*
00914     Copy the term first to scratchterm. This is needed
00915     because of the Substitute.
00916     */
00917     i = *term;
00918     t = term; newterm = r = AT.WorkPointer;
00919     NCOPY(r,t,i); AT.WorkPointer = r;
00920     RetVal = 0;
00921     if ( FindRest(BHEAD newterm,m) && ( AN.UsedOtherFind ||
00922         FindOnly(BHEAD newterm,m) ) ) {
00923         Substitute(BHEAD newterm,m,1);
00924         if ( numdollars ) {
00925             WildDollars(BHEAD (WORD *)0);
00926             numdollars = 0;
00927         }
00928         ClearWild(BHEAD0);
00929         RetVal = 1;
00930     }
00931     else RetVal = 0;
00932     break;
00933     case SUBMANY :
00934     /*
00935     Copy the term first to scratchterm. This is needed
00936     because of the Substitute.
00937     */
00938     i = *term;
00939     t = term; newterm = r = AT.WorkPointer;
00940     NCOPY(r,t,i); AT.WorkPointer = r;
00941     RetVal = 0;
00942     AN.UseFindOnly = 0;
00943     if ( ( power = FindRest(BHEAD newterm,m) ) > 0 ) {
00944         if ( ( power = FindOnce(BHEAD newterm,m) ) > 0 ) {
00945             AN.UseFindOnly = 0;
00946             do {
00947                 Substitute(BHEAD newterm,m,1);

```

```

00948         if ( numdollars ) {
00949             WildDollars(BHEAD (WORD *)0);
00950             numdollars = 0;
00951         }
00952         ClearWild(BHEAD0);
00953         RetVal++;
00954     } while ( FindRest(BHEAD newterm,m) && (
00955         AN.UsedOtherFind || FindOnce(BHEAD newterm,m) ) );
00956     }
00957     else if ( power < 0 ) {
00958         do {
00959             Substitute(BHEAD newterm,m,1);
00960             if ( numdollars ) {
00961                 WildDollars(BHEAD (WORD *)0);
00962                 numdollars = 0;
00963             }
00964             ClearWild(BHEAD0);
00965             RetVal++;
00966         } while ( FindRest(BHEAD newterm,m) );
00967     }
00968 }
00969 else if ( power < 0 ) {
00970     if ( FindOnce(BHEAD newterm,m) ) {
00971         do {
00972             Substitute(BHEAD newterm,m,1);
00973             if ( numdollars ) {
00974                 WildDollars(BHEAD (WORD *)0);
00975                 numdollars = 0;
00976             }
00977             ClearWild(BHEAD0);
00978         } while ( FindOnce(BHEAD newterm,m) );
00979         RetVal = 1;
00980     }
00981 }
00982 break;
00983 case SUBONCE :
00984 /*
00985     Copy the term first to scratchterm. This is needed
00986     because of the Substitute.
00987 */
00988     i = *term;
00989     t = term; newterm = r = AT.WorkPointer;
00990     NCOPY(r,t,i); AT.WorkPointer = r;
00991     RetVal = 0;
00992     AN.UseFindOnly = 0;
00993     if ( FindRest(BHEAD newterm,m) && ( AN.UsedOtherFind || FindOnce(BHEAD newterm,m) ) ) {
00994         Substitute(BHEAD newterm,m,1);
00995         if ( numdollars ) {
00996             WildDollars(BHEAD (WORD *)0);
00997             numdollars = 0;
00998         }
00999         ClearWild(BHEAD0);
01000         RetVal = 1;
01001     }
01002     else RetVal = 0;
01003     break;
01004 case SUBMULTI :
01005     RetVal = FindMulti(BHEAD term,m);
01006     break;
01007 case SUBVECTOR :
01008     RetVal = 0;
01009     for ( i = 0; i < *term; i++ ) ww[i] = term[i];
01010     while ( ( power = FindAll(BHEAD ww,m,AR.Cnumlhs,ifcode) ) != 0 ) { RetVal += power; }
01011     break;
01012 case SUBSELECT :
01013     ifcode += IDHEAD; ifcode += ifcode[1]; ifcode += *ifcode;
01014     AN.UseFindOnly = 1; AN.ForFindOnly = ifcode;
01015     if ( FindRest(BHEAD term,m) && ( AN.UsedOtherFind ||
01016         FindOnly(BHEAD term,m) ) ) RetVal = 1;
01017     else RetVal = 0;
01018     break;
01019 default :
01020     RetVal = 0;
01021     break;
01022 }
01023 AT.WorkPointer = AN.RepFunList;
01024 cbuf[AT.ebufnum].numrhs = topje;
01025 return(RetVal);
01026 }
01027
01028 /*
01029     #] HowMany :
01030     #[ DoubleIfBuffers :
01031 */
01032
01033 void DoubleIfBuffers(void)
01034 {

```

```

01035     int newmax, i;
01036     WORD *newsumcheck;
01037     LONG *newheap, *newifcount;
01038     if ( AC.MaxIf == 0 ) newmax = 10;
01039     else newmax = 2*AC.MaxIf;
01040     newheap = (LONG *)Malloc1(sizeof(LONG)*(newmax+1),"IfHeap");
01041     newsumcheck = (WORD *)Malloc1(sizeof(WORD)*(newmax+1),"IfSumCheck");
01042     newifcount = (LONG *)Malloc1(sizeof(LONG)*(newmax+1),"IfCount");
01043     if ( AC.MaxIf ) {
01044         for ( i = 0; i < AC.MaxIf; i++ ) {
01045             newheap[i] = AC.IfHeap[i];
01046             newsumcheck[i] = AC.IfSumCheck[i];
01047             newifcount[i] = AC.IfCount[i];
01048         }
01049         AC.IfStack = (AC.IfStack-AC.IfHeap) + newheap;
01050         M_free(AC.IfHeap,"AC.IfHeap");
01051         M_free(AC.IfCount,"AC.IfCount");
01052         M_free(AC.IfSumCheck,"AC.IfSumCheck");
01053     }
01054     else {
01055         AC.IfStack = newheap;
01056     }
01057     AC.IfHeap = newheap;
01058     AC.IfSumCheck = newsumcheck;
01059     AC.IfCount = newifcount;
01060     AC.MaxIf = newmax;
01061 }
01062
01063 /*
01064     #] DoubleIfBuffers :
01065     #] If statement :
01066     #[ Switch statement :
01067     #[ DoSwitch :
01068 */
01069 int DoSwitch(PHEAD WORD *term, WORD *lhs)
01070 {
01071     /*
01072     For the moment we ignore the compiler buffer problems.
01073     */
01074     WORD numdollar = lhs[2];
01075     WORD ncase = DolToNumber(BHEAD numdollar);
01076     SWITCHTABLE *swtab = FindCase(lhs[3],ncase);
01077     return(Generator(BHEAD term,swtab->value));
01078 }
01079
01080 /*
01081     #] DoSwitch :
01082     #[ DoEndSwitch :
01083 */
01084 int DoEndSwitch(PHEAD WORD *term, WORD *lhs)
01085 {
01086     SWITCH *sw = AC.SwitchArray+lhs[2];
01087     return(Generator(BHEAD term,sw->endswitch.value+1));
01088 }
01089
01090 /*
01091     #] DoEndSwitch :
01092     #[ FindCase :
01093 */
01094 SWITCHTABLE *FindCase(WORD nswitch, WORD ncase)
01095 {
01096     /*
01097     First find the switch table and determine how we have to search.
01098     */
01099     SWITCH *sw = AC.SwitchArray+nswitch;
01100     WORD hi, lo, med;
01101     if ( sw->typetable == DENSETABLE ) {
01102         med = ncase - sw->caseoffset;
01103         if ( med >= sw->numcases || med < 0 ) return(&sw->defaultcase);
01104     }
01105     else {
01106         /*
01107         We need a binary search in the table.
01108         */
01109         if ( ncase > sw->maxcase || ncase < sw->mincase ) return(&sw->defaultcase);
01110         hi = sw->numcases-1; lo = 0;
01111         for(;;) {
01112             med = (hi+lo)/2;
01113             if ( ncase == sw->table[med].ncase ) break;
01114             else if ( ncase > sw->table[med].ncase ) {
01115                 lo = med+1;
01116             }
01117             else if ( lo > hi ) return(&sw->defaultcase);
01118         }
01119         else {

```

```

01122             hi = med-1;
01123             if ( hi < lo ) return(&sw->defaultcase);
01124         }
01125     }
01126 }
01127 return(&sw->table[med]);
01128 }
01129
01130 /*
01131     #] FindCase :
01132     #[ DoubleSwitchBuffers :
01133 */
01134
01135 int DoubleSwitchBuffers(void)
01136 {
01137     int newmax, i;
01138     SWITCH *newarray;
01139     WORD *newheap;
01140     if ( AC.MaxSwitch == 0 ) newmax = 10;
01141     else newmax = 2*AC.MaxSwitch;
01142     newarray = (SWITCH *)Malloc1(sizeof(SWITCH)*(newmax+1),"SwitchArray");
01143     newheap = (WORD *)Malloc1(sizeof(WORD)*(newmax+1),"SwitchHeap");
01144     if ( AC.MaxSwitch ) {
01145         for ( i = 0; i < AC.MaxSwitch; i++ ) {
01146             newarray[i] = AC.SwitchArray[i];
01147             newheap[i] = AC.SwitchHeap[i];
01148         }
01149         M_free(AC.SwitchHeap,"AC.SwitchHeap");
01150         M_free(AC.SwitchArray,"AC.SwitchArray");
01151     }
01152     for ( i = AC.MaxSwitch; i <= newmax; i++ ) {
01153         newarray[i].table = 0;
01154         newarray[i].tablesize = 0;
01155         newarray[i].defaultcase.ncase = 0;
01156         newarray[i].defaultcase.value = 0;
01157         newarray[i].defaultcase.compbuffer = 0;
01158         newarray[i].endswitch.ncase = 0;
01159         newarray[i].endswitch.value = 0;
01160         newarray[i].endswitch.compbuffer = 0;
01161         newarray[i].typetable = 0;
01162         newarray[i].mincase = 0;
01163         newarray[i].maxcase = 0;
01164         newarray[i].numcases = 0;
01165         newarray[i].caseoffset = 0;
01166         newarray[i].iflevel = 0;
01167         newarray[i].whilelevel = 0;
01168         newarray[i].nestingsum = 0;
01169         newheap[i] = 0;
01170     }
01171     AC.SwitchArray = newarray;
01172     AC.SwitchHeap = newheap;
01173     AC.MaxSwitch = newmax;
01174     return(0);
01175 }
01176
01177 /*
01178     #] DoubleSwitchBuffers :
01179     #[ SwitchSplitMerge :
01180
01181     Sorts an array of WORDs. No adding of equal objects.
01182 */
01183
01184 void SwitchSplitMergeRec(SWITCHTABLE *array,WORD num,SWITCHTABLE *auxarray)
01185 {
01186     WORD n1,n2,i,j,k;
01187     SWITCHTABLE *t1,*t2, t;
01188     if ( num < 2 ) return;
01189     if ( num == 2 ) {
01190         if ( array[0].ncase > array[1].ncase ) {
01191             t = array[0]; array[0] = array[1]; array[1] = t;
01192         }
01193         return;
01194     }
01195     n1 = num/2;
01196     n2 = num - n1;
01197     SwitchSplitMergeRec(array,n1,auxarray);
01198     SwitchSplitMergeRec(array+n1,n2,auxarray);
01199     if ( array[n1-1].ncase <= array[n1].ncase ) return;
01200
01201     t1 = array; t2 = auxarray; i = n1; NCOPY(t2,t1,i);
01202     i = 0; j = n1; k = 0;
01203     while ( i < n1 && j < num ) {
01204         if ( auxarray[i].ncase <= array[j].ncase ) { array[k++] = auxarray[i++]; }
01205         else { array[k++] = array[j++]; }
01206     }
01207     while ( i < n1 ) array[k++] = auxarray[i++];
01208 }

```

```


01209     Remember: remnants of j are still in place!
01210 */
01211 }
01212
01213 void SwitchSplitMerge(SWITCHTABLE *array, WORD num)
01214 {
01215     SWITCHTABLE *auxarray = (SWITCHTABLE *)Malloc1(sizeof(SWITCHTABLE)*num/2, "SwitchSplitMerge");
01216     SwitchSplitMergeRec(array, num, auxarray);
01217     M_free(auxarray, "SwitchSplitMerge");
01218 }
01219
01220 /*
01221     #] SwitchSplitMerge :
01222     #] Switch statement :
01223 */

```

4.64 index.c File Reference

```
#include "form3.h"
```

Include dependency graph for index.c:

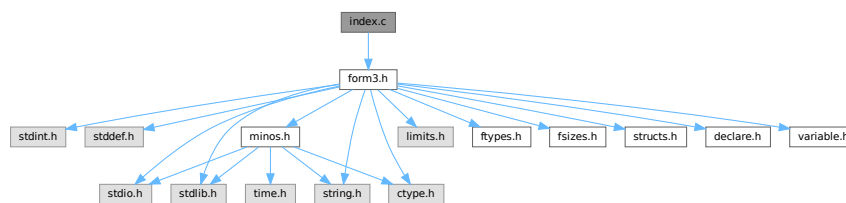

Functions

- **POSITION** * FindBracket (WORD nexp, WORD *bracket)
- void PutBracketInIndex (PHEAD WORD *term, **POSITION** *newpos)
- void ClearBracketIndex (WORD numexp)
- void OpenBracketIndex (WORD nexpr)
- int PutInside (PHEAD WORD *term, WORD *code)

4.64.1 Detailed Description

The routines that deal with bracket indexing It creates the bracket index and it can find the brackets using the index.

Definition in file [index.c](#).

4.64.2 Function Documentation

4.64.2.1 FindBracket()

```

POSITION * FindBracket (
    WORD nexp,
    WORD * bracket )

```

Definition at line 65 of file [index.c](#).

4.64.2.2 PutBracketInIndex()

```
void PutBracketInIndex (
    PHEAD WORD * term,
    POSITION * newpos )
```

Definition at line 331 of file [index.c](#).

4.64.2.3 ClearBracketIndex()

```
void ClearBracketIndex (
    WORD numexp )
```

Definition at line 546 of file [index.c](#).

4.64.2.4 OpenBracketIndex()

```
void OpenBracketIndex (
    WORD nexpr )
```

Definition at line 578 of file [index.c](#).

4.64.2.5 PutInside()

```
int PutInside (
    PHEAD WORD * term,
    WORD * code )
```

Definition at line 609 of file [index.c](#).

4.65 index.c

[Go to the documentation of this file.](#)

```
00001
00008 /* #[ License : */
00009 /*
00010 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 * When using this file you are requested to refer to the publication
00012 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 * This is considered a matter of courtesy as the development was paid
00014 * for by FOM the Dutch physics granting agency and we would like to
00015 * be able to track its scientific use to convince FOM of its value
00016 * for the community.
00017 *
00018 * This file is part of FORM.
00019 *
00020 * FORM is free software: you can redistribute it and/or modify it under the
00021 * terms of the GNU General Public License as published by the Free Software
00022 * Foundation, either version 3 of the License, or (at your option) any later
00023 * version.
00024 *
00025 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 * details.
00029 *
00030 * You should have received a copy of the GNU General Public License along
00031 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
```

```

00033 /* #] License : */
00034
00035 /*
00036     #[ Includes : index.c
00037 */
00038
00039 #include "form3.h"
00040
00041 /*
00042     #] Includes :
00043     #[ syntax and use :
00044
00045     The indexing of brackets is not automatic! It should only be used
00046     when one intends to use the contents of individual brackets.
00047     This is done with the addition of a + sign to the bracket statement:
00048     B+ a,b,c; or AB+ a,b,c;
00049     It does require resources! The index is kept in memory and is removed
00050     once the expression is treated and passed on to the output with different
00051     or no brackets.
00052     The index is limited to a given amount of space. Hence if there are too
00053     many brackets we will skip some in the index. Skipping goes by space
00054     occupied by the contents. We take the two adjacent bracket(s) with the
00055     least space together and represent them by the first one only. This gives
00056     a new spot.
00057     The expression struct has two pointers:
00058     bracketinfo      for using.
00059     newbracketinfo   for making new index.
00060
00061     #] syntax and use :
00062     #[ FindBracket :
00063 */
00064
00065 POSITION *FindBracket(WORD nexp, WORD *bracket)
00066 {
00067     GETIDENTITY
00068     BRACKETINDEX *bi;
00069     BRACKETINFO *bracketinfo;
00070     EXPRESSIONS e = &(Expressions[nexp]);
00071     LONG hi, low, med;
00072     int i;
00073     WORD oldsorttype = AR.SortType, *t1, *t2, j, bsize, *term, *p, *pstop, *pp;
00074     WORD *tstop, *cp, a[4], *bracketh;
00075     FILEHANDLE *fi;
00076     POSITION auxpos, toppos;
00077     switch ( e->status ) {
00078         case UNHIDELEXPRESSION:
00079         case UNHIDEGEXPRESSION:
00080         case DROPHLEXPRESSION:
00081         case DROPHGEXPRESSION:
00082         case HIDDENLEXPRESSION:
00083         case HIDDENGEXPRESSION:
00084             fi = AR.hidefile;
00085             break;
00086         default:
00087             fi = AR.infile;
00088             break;
00089     }
00090     if ( AT.bracketinfo ) bracketinfo = AT.bracketinfo;
00091     else bracketinfo = e->bracketinfo;
00092     hi = bracketinfo->indexfill; low = 0;
00093     if ( hi <= 0 ) return(0);
00094 /*
00095     The next code is needed for a problem with sorting when there are
00096     only functions outside the bracket. This gives ordinarily the wrong
00097     sorting. We solve that by taking HAAKJE along with the outside while
00098     running the Compare. But this means that we need to copy bracket.
00099 */
00100     bracketh = TermMalloc("FindBracket");
00101     i = *bracket; p = bracket; pp = bracketh; NCOPY(pp,p,i)
00102     pp -= 3; *pp++ = HAAKJE; *pp++ = 3; *pp++ = 0; *pp++ = 1; *pp++ = 1; *pp++ = 3;
00103     *bracketh += 3;
00104
00105     AT.fromindex = 1;
00106     AR.SortType = bracketinfo->SortType;
00107     bi = bracketinfo->indexbuffer + hi - 1;
00108     if ( *bracketh == 7 ) {
00109         if ( bracketinfo->bracketbuffer[bi->bracket] == 7 ) i = 0;
00110         else i = -1;
00111     }
00112     else if ( bracketinfo->bracketbuffer[bi->bracket] == 7 ) i = 1;
00113     else i = CompareTerms(BHEAD bracketh,bracketinfo->bracketbuffer+bi->bracket,0);
00114     if ( i < 0 ) {
00115         AR.SortType = oldsorttype;
00116         AT.fromindex = 0;
00117         TermFree(bracketh,"FindBracket");
00118         return(0);
00119     }

```

```

00120     else if ( i == 0 ) med = hi-1;
00121     else {
00122         for (;;) {
00123             med = (hi+low)/2;
00124             bi = bracketinfo->indexbuffer + med;
00125             if ( *bracketh == 7 ) {
00126                 if ( bracketinfo->bracketbuffer[bi->bracket] == 7 ) i = 0;
00127                 else i = -1;
00128             }
00129             else if ( bracketinfo->bracketbuffer[bi->bracket] == 7 ) i = 1;
00130             else i = CompareTerms(BHEAD bracketh,bracketinfo->bracketbuffer+bi->bracket,0);
00131             if ( i == 0 ) { break; }
00132             if ( i > 0 ) {
00133                 if ( low == med ) { /* no occurrence */
00134                     AR.SortType = oldsorttype;
00135                     AT.fromindex = 0;
00136                     TermFree(bracketh,"FindBracket");
00137                     return(0);
00138                 }
00139                 hi = med;
00140             }
00141             else if ( i < 0 ) {
00142                 if ( low == med ) break;
00143                 low = med;
00144             }
00145         }}
00146     /*
00147     The bracket is now either bi itself or between bi and the next one
00148     or it is not present at all.
00149     */
00150     AN.theposition = AS.OldOnFile[nexp];
00151     ADD2POS(AN.theposition,bi->start);
00152     /*
00153     The seek will have to move closer to the actual read so that we
00154     can place a lock around the two.
00155     if ( fi->handle >= 0 ) SeekFile(fi->handle,&AN.theposition,SEEK_SET);
00156     else SetScratch(fi,&AN.theposition);
00157     */
00158     /*
00159     Put the bracket in the compress buffer as if it were the last term read.
00160     Have a look at AR.CompressPointer. (set it right)
00161     */
00162     term = AT.WorkPointer;
00163     t1 = bracketinfo->bracketbuffer+bi->bracket;
00164     j = *t1;
00165     /*
00166     Note that in the bracketbuffer, the bracket sits with HAAKJE.
00167
00168     The next is (hopefully) a bug fix. Originally the code read bsize = j
00169     but that overcounts one. We have the part outside the bracket and the
00170     coefficient which is 1,1,3. But we also have the length indicator.
00171     Where we use the variable bsize we do not include the length indicator,
00172     and we have the part outside plus 7,3,0 which is also three words.
00173     */
00174     bsize = j-1;
00175     t2 = AR.CompressPointer;
00176     NCOPY(t2,t1,j)
00177     if ( i == 0 ) { /* We found the proper bracket already */
00178         AR.SortType = oldsorttype;
00179         AT.fromindex = 0;
00180         TermFree(bracketh,"FindBracket");
00181         return(&AN.theposition);
00182     }
00183     /*
00184     Here we have to skip to the bracket if it exists (!)
00185     Let us first look whether the expression is in memory.
00186     If not we have to make a buffer to increase speed..
00187     */
00188     if ( fi->handle < 0 ) {
00189         p = (WORD *) ((UBYTE *) (fi->PObuffer)
00190             + BASEPOSITION(AS.OldOnFile[nexp])
00191             + BASEPOSITION(bi->start));
00192         pstop = (WORD *) ((UBYTE *) (fi->PObuffer)
00193             + BASEPOSITION(AS.OldOnFile[nexp])
00194             + BASEPOSITION(bi->next));
00195         while ( p < pstop ) {
00196             /*
00197             Check now: if size or part from previous term < size of bracket
00198             we have to setup the bracket again and test.
00199             Otherwise, skip immediately to the next term.
00200             */
00201             if ( *p <= -bsize ) { /* no change of bracket */
00202                 p++; p += *p + 1;
00203             }
00204             else if ( *p < 0 ) { /* changes bracket */
00205                 pp = p;
00206                 t2 = AR.CompressPointer;

```

```

00207         t1 = t2 - *p++ + 1;
00208         j = *p++;
00209         NCOPY(t1,p,j)
00210         t2++; while ( *t2 != HAAKJE ) t2 += t2[1];
00211         t2 += t2[1];
00212         a[1] = t2[0]; a[2] = t2[1]; a[3] = t2[2];
00213         *t2++ = 1; *t2++ = 1; *t2++ = 3;
00214         *AR.CompressPointer = t2 - AR.CompressPointer;
00215         bsize = *AR.CompressPointer - 1;
00216         if ( *bracketh == 7 ) {
00217             if ( AR.CompressPointer[0] == 7 ) i = 0;
00218             else i = -1;
00219         }
00220         else if ( AR.CompressPointer[0] == 7 ) i = 1;
00221         else i = CompareTerms(BHEAD bracketh,AR.CompressPointer,0);
00222         t2[-3] = a[1]; t2[-2] = a[2]; t2[-1] = a[3];
00223         if ( i == 0 ) {
00224             SETBASEPOSITION(AN.theposition,(pp-fi->PObuffer)*sizeof(WORD));
00225             fi->POfill = pp;
00226             goto found;
00227         }
00228         if ( i > 0 ) break; /* passed what was possible */
00229     }
00230     else { /* no compression. We have to check! */
00231         WORD *oldworkpointer = AT.WorkPointer, *t3, *t4;
00232         t2 = p + 1; while ( *t2 != HAAKJE ) t2 += t2[1];
00233         t2 += t2[1];
00234         /*
00235          Here we need to copy the term. Modifying has proven to
00236          be NOT threadsafe.
00237          */
00238         t3 = oldworkpointer; t4 = p;
00239         while ( t4 < t2 ) *t3++ = *t4++;
00240         *t3++ = 1; *t3++ = 1; *t3++ = 3;
00241         *oldworkpointer = t3 - oldworkpointer;
00242         bsize = *oldworkpointer - 1;
00243         AT.WorkPointer = t3;
00244         t3 = oldworkpointer;
00245         if ( *bracketh == 7 ) {
00246             if ( t3[0] == 7 ) i = 0;
00247             else i = -1;
00248         }
00249         else if ( t3[0] == 7 ) i = 1;
00250         else {
00251             i = CompareTerms(BHEAD bracketh,t3,0);
00252         }
00253         AT.WorkPointer = oldworkpointer;
00254         if ( i == 0 ) {
00255             SETBASEPOSITION(AN.theposition,(p-fi->PObuffer)*sizeof(WORD));
00256             fi->POfill = p;
00257             goto found;
00258         }
00259         if ( i > 0 ) break; /* passed what was possible */
00260         p += *p;
00261     }
00262 }
00263 AR.SortType = oldsorttype;
00264 AT.fromindex = 0;
00265 TermFree(bracketh,"FindBracket");
00266 return(0); /* Bracket does not exist */
00267 }
00268 else {
00269     /*
00270     In this case we can work with the old representation without HAAKJE.
00271     We stop searching when we reach toppos and we do not call Compare.
00272     */
00273     toppos = AS.OldOnFile[nexp];
00274     ADD2POS(toppos,bi->next);
00275     cp = AR.CompressPointer;
00276     for(;;) {
00277         auxpos = AN.theposition;
00278         GetOneTerm(BHEAD term,fi,&auxpos,0);
00279         if ( *term == 0 ) {
00280             AR.SortType = oldsorttype;
00281             AT.fromindex = 0;
00282             return(0); /* Bracket does not exist */
00283         }
00284         tstop = term + *term;
00285         tstop -= ABS(tstop[-1]);
00286         t1 = term + 1;
00287         while ( *t1 != HAAKJE && t1 < tstop ) t1 += t1[1];
00288         i = *bracket-4;
00289         if ( t1-term == *bracket-3 ) {
00290             t1 = term + 1; t2 = bracket+1;
00291             while ( i > 0 && *t1 == *t2 ) { t1++; t2++; i--; }
00292             if ( i <= 0 ) {
00293                 AR.CompressPointer = cp;

```

```

00294             goto found;
00295         }
00296     }
00297     AR.CompressPointer = cp;
00298     AN.theposition = auxpos;
00299 /*
00300     Now check whether we passed the 'point'
00301 */
00302     if ( ISGEPOS(AN.theposition,toppos) ) {
00303         AR.SortType = oldsorttype;
00304         AR.CompressPointer = cp;
00305         AT.fromindex = 0;
00306         TermFree(bracketh,"FindBracket");
00307         return(0); /* Bracket does not exist */
00308     }
00309 }
00310 }
00311 found:
00312     AR.SortType = oldsorttype;
00313     AT.fromindex = 0;
00314     TermFree(bracketh,"FindBracket");
00315     return(&AN.theposition);
00316 }
00317
00318 /*
00319     #] FindBracket :
00320     #[ PutBracketInIndex :
00321
00322     Call via
00323     if ( AR.BracketOn ) PutBracketInIndex(BHEAD term);
00324
00325     This means that there should be a bracket somewhere
00326     Note that the brackets come in in proper order.
00327
00328     DON'T forget AR.SortType to be put into e->bracketinfo->SortType
00329 */
00330
00331 void PutBracketInIndex(PHEAD WORD *term, POSITION *newpos)
00332 {
00333     GETBIDENTITY
00334     BRACKETINDEX *bi, *b1, *b2, *b3;
00335     BRACKETINFO *b;
00336     POSITION thepos;
00337     EXPRESSIONS e = Expressions + AR.CurExpr;
00338     LONG hi, i, average;
00339     WORD *t, *tstop, *t1, *t2, *oldt, oldsize, a[4];
00340     if ( ( b = e->newbracketinfo ) == 0 ) return;
00341     DIFPOS(thepos,*newpos,e->onfile);
00342     tstop = term + *term;
00343     tstop -= ABS(tstop[-1]);
00344     t = term+1;
00345     while ( *t != HAAKJE && t < tstop ) t += t[1];
00346     if ( t >= tstop ) return; /* no ticket, no laundry */
00347     t += t[1]; /* include HAAKJE for the sorting */
00348     a[0] = t[0]; a[1] = t[1]; a[2] = t[2];
00349     oldt = t; oldsize = *term; *t++ = 1; *t++ = 1; *t++ = 3;
00350     *term = t - term;
00351     AT.fromindex = 1;
00352 /*
00353     Check now with the last bracket in the buffer.
00354     If it is the same we can abort.
00355 */
00356     hi = b->indexfill;
00357     if ( hi > 0 ) {
00358         bi = b->indexbuffer + hi - 1;
00359         bi->next = thepos;
00360         if ( *term == 7 ) {
00361             if ( b->bracketbuffer[bi->bracket] == 7 ) i = 0;
00362             else i = -1;
00363         }
00364         else if ( b->bracketbuffer[bi->bracket] == 7 ) i = 1;
00365         else i = CompareTerms(BHEAD term,b->bracketbuffer+bi->bracket,0);
00366         if ( i == 0 ) { /* still the same bracket */
00367             bi->termsinbracket++;
00368             goto bracketdone;
00369         }
00370         if ( i > 0 ) { /* We have a problem */
00371 /*
00372         There is a special case in which we have only functions and
00373         term is contained completely in the bracket
00374 */
00375         /*
00376             t = term + 1;
00377             tstop = term + *term - 3;
00378             while ( t < tstop && *t > HAAKJE ) t += t[1];
00379             if ( t < tstop ) goto problems;
00380 */

```

```

00381         for ( i = 1; i < *term - 3; i++ ) {
00382             if ( term[i] != b->bracketbuffer[bi->bracket+i] ) break;
00383         }
00384         if ( i < *term - 3 ) {
00385             /*
00386             problems;;
00387             */
00388             *term = oldsize; oldt[0] = a[0]; oldt[1] = a[1]; oldt[2] = a[2];
00389             MLOCK(ErrorMessageLock);
00390             MesPrint("Error!!!! Illegal bracket sequence detected in PutBracketInIndex");
00391             #ifdef WITHPTHREADS
00392             MesPrint("Worker = %w");
00393             #endif
00394             PrintTerm(term,"term into index");
00395             PrintTerm(b->bracketbuffer+bi->bracket,"Last in index");
00396             MUNLOCK(ErrorMessageLock);
00397             AT.fromindex = 0;
00398             Terminate(-1);
00399         }
00400         i = -1;
00401     }
00402 }
00403 /*
00404 If there is room for more brackets, we add this one.
00405 */
00406 if ( b->bracketfill+*term >= b->bracketbuffersize
00407     && ( b->bracketbuffersize < AM.MaxBracketBufferSize
00408         || ( e->vflags & ISFACTORIZED ) != 0 ) ) {
00409     /*
00410     Enlarge bracket buffer
00411     */
00412     WORD *oldbracketbuffer = b->bracketbuffer;
00413     i = Max(b->bracketbuffersize * 2, b->bracketfill+*term+1);
00414     if ( i > AM.MaxBracketBufferSize && ( e->vflags & ISFACTORIZED ) == 0 )
00415         i = AM.MaxBracketBufferSize;
00416     if ( i > b->bracketfill+*term ) {
00417         b->bracketbuffersize = i;
00418         b->bracketbuffer = (WORD *)Malloca1(b->bracketbuffersize*sizeof(WORD),
00419             "new bracket buffer");
00420         t1 = b->bracketbuffer; t2 = oldbracketbuffer;
00421         i = b->bracketfill;
00422         NCOPY(t1,t2,i)
00423         if ( oldbracketbuffer ) M_free(oldbracketbuffer,"old bracket buffer");
00424     }
00425 }
00426 if ( b->bracketfill+*term < b->bracketbuffersize ) {
00427     if ( b->indexfill >= b->indexbuffersize ) {
00428         /*
00429         Enlarge index
00430         */
00431         BRACKETINDEX *oldindexbuffer = b->indexbuffer;
00432         b->indexbuffersize *= 2;
00433         b->indexbuffer = (BRACKETINDEX *)
00434             Malloca1(b->indexbuffersize*sizeof(BRACKETINDEX),"new bracket index");
00435         b1 = b->indexbuffer; b2 = oldindexbuffer;
00436         i = b->indexfill;
00437         NCOPY(b1,b2,i)
00438         if ( oldindexbuffer ) M_free(oldindexbuffer,"old bracket index");
00439     }
00440 }
00441 else {
00442     /*
00443     We have too many brackets in the buffer. Try to improve.
00444     This is the interesting algorithm. We try to eliminate about 1/4 to
00445     1/2 of the brackets from the index. This should be done by size of
00446     the bracket contents to make the searching as fast as possible.
00447     But! Do not touch the last bracket.
00448     Note that we are always filling from the back.
00449     Algorithm: Throw away every second bracket, unless b1+b2 is much longer
00450     than average. How much is something we can tune.
00451     */
00452     average = DIVPOS(thepos,b->indexfill+1);
00453     if ( average <= 0 ) {
00454         MLOCK(ErrorMessageLock);
00455         MesPrint("Problems with bracket buffer. Increase MaxBracketBufferSize in form.set");
00456         MesPrint("Current size is %l",AM.MaxBracketBufferSize*sizeof(WORD));
00457         MUNLOCK(ErrorMessageLock);
00458         Terminate(-1);
00459     }
00460     average *= 4; /* 2*2: one 2 for much longer, one 2 because we have pairs */
00461     t2 = b->bracketbuffer;
00462     b3 = b1 = b->indexbuffer;
00463     bi = b->indexbuffer + b->indexfill;
00464     b2 = b1+1;
00465     while ( b2+2 < bi ) {
00466         if ( DIFBASE(b2->next,b1->start) > average ) {
00467             t1 = b->bracketbuffer + b1->bracket;

```

```

00468         b1->bracket = t2 - b->bracketbuffer;
00469         i = *t1; NCOPY(t2,t1,i)
00470         *b3++ = *b1;
00471         t1 = b->bracketbuffer + b2->bracket;
00472         b2->bracket = t2 - b->bracketbuffer;
00473         i = *t1; NCOPY(t2,t1,i)
00474         *b3++ = *b2;
00475         if ( b3 <= b1 ) {
00476             PUTZERO(b1->start);
00477             PUTZERO(b1->next);
00478             b1->bracket = 0;
00479             b1->termsinbracket = 0;
00480         }
00481         if ( b3 <= b2 ) {
00482             PUTZERO(b2->start);
00483             PUTZERO(b2->next);
00484             b2->bracket = 0;
00485             b2->termsinbracket = 0;
00486         }
00487     }
00488     else {
00489         t1 = b->bracketbuffer + b1->bracket;
00490         b1->bracket = t2 - b->bracketbuffer;
00491         i = *t1; NCOPY(t2,t1,i)
00492         b1->next = b2->next;
00493         b1->termsinbracket += b2->termsinbracket;
00494         *b3++ = *b1;
00495         if ( b3 <= b1 ) {
00496             PUTZERO(b1->start);
00497             PUTZERO(b1->next);
00498             b1->bracket = 0;
00499             b1->termsinbracket = 0;
00500         }
00501         PUTZERO(b2->start);
00502         PUTZERO(b2->next);
00503         b2->bracket = 0;
00504         b2->termsinbracket = 0;
00505     }
00506     b1 += 2; b2 += 2;
00507 }
00508 while ( b1 < bi ) {
00509     t1 = b->bracketbuffer + b1->bracket;
00510     b1->bracket = t2 - b->bracketbuffer;
00511     i = *t1; NCOPY(t2,t1,i)
00512     *b3++ = *b1;
00513     if ( b3 <= b1 ) {
00514         PUTZERO(b1->start);
00515         PUTZERO(b1->next);
00516         b1->bracket = 0;
00517         b1->termsinbracket = 0;
00518     }
00519     b1++;
00520 }
00521 b->indexfill = b3 - b->indexbuffer;
00522 b->bracketfill = t2 - b->bracketbuffer;
00523 }
00524 bi = b->indexbuffer + b->indexfill;
00525 b->indexfill++;
00526 bi->bracket = b->bracketfill;
00527 bi->start = thepos;
00528 bi->next = thepos;
00529 bi->termsinbracket = 1;
00530 /*
00531 Copy the bracket into the buffer
00532 */
00533 t1 = term; t2 = b->bracketbuffer + bi->bracket; i = *t1;
00534 b->bracketfill += i;
00535 NCOPY(t2,t1,i)
00536 bracketdone:
00537 *term = oldsize; oldt[0] = a[0]; oldt[1] = a[1]; oldt[2] = a[2];
00538 AT.fromindex = 0;
00539 }
00540
00541 /*
00542 #] PutBracketInIndex :
00543 #[ ClearBracketIndex :
00544 */
00545
00546 void ClearBracketIndex(WORD numexp)
00547 {
00548     BRACKETINFO *b;
00549     if ( numexp >= 0 ) {
00550         b = Expressions[numexp].bracketinfo;
00551         Expressions[numexp].bracketinfo = 0;
00552     }
00553     else if ( numexp == -1 ) {
00554         GETIDENTITY

```

```

00555         b = AT.bracketinfo;
00556         AT.bracketinfo = 0;
00557     }
00558     else {
00559         numexp = -numexp-2;
00560         b = Expressions[numexp].newbracketinfo;
00561         Expressions[numexp].newbracketinfo = 0;
00562     }
00563     if ( b == 0 ) return;
00564     b->indexfill = b->indexbuffersize = 0;
00565     b->bracketfill = b->bracketbuffersize = 0;
00566     M_free(b->bracketbuffer, "ClearBracketBuffer");
00567     M_free(b->indexbuffer, "ClearIndexBuffer");
00568     M_free(b, "BracketInfo");
00569 }
00570
00571 /*
00572 #] ClearBracketIndex :
00573 #[ OpenBracketIndex :
00574
00575     Note: This routine is thread-safe
00576 */
00577 void OpenBracketIndex(WORD nexpr)
00578 {
00579     EXPRESSIONS e = Expressions + nexpr;
00580     BRACKETINFO *bi;
00581     LONG i;
00582     bi = (BRACKETINFO *)Malloc1(sizeof(BRACKETINFO), "BracketInfo");
00583     e->newbracketinfo = bi;
00584     /*
00585     i = 20*AM.MaxTer/sizeof(WORD);
00586     if ( i < 1000 ) i = 1000;
00587     */
00588     i = 2000;
00589     bi->bracketbuffer = (WORD *)Malloc1(i*sizeof(WORD), "Bracket Buffer");
00590     bi->bracketbuffersize = i;
00591     bi->bracketfill = 0;
00592     i = 50;
00593     bi->indexbuffer = (BRACKETINDEX *)Malloc1(i*sizeof(BRACKETINDEX), "Bracket Index");
00594     bi->indexbuffersize = i;
00595     bi->indexfill = 0;
00596     bi->SortType = AC.SortType;
00597 }
00598
00599
00600 /*
00601 #] OpenBracketIndex :
00602 #[ PutInside :
00603
00604     Puts a term, or a bracket determined part of a term inside a function.
00605
00606     AT.WorkPointer points at term+*term
00607 */
00608
00609 int PutInside(PHEAD WORD *term, WORD *code)
00610 {
00611     WORD *from, *to, *oldbuf, *tStop, *t, *tt, oldon, oldact, inc, argsize, *termout;
00612     int i, ii, error;
00613
00614     if ( code[1] == 4 && ( code[2] == 0 || code[2] == 1 ) ) {
00615         /*
00616         Put all inside. Move the term by 1+FUNHEAD+ARGHEAD
00617         */
00618         from = term+*term; to = from+1+ARGHEAD+FUNHEAD; i = ii = *term;
00619         to[0] = 1; to[1] = 1; to[2] = 3;
00620         while ( --i >= 0 ) *--to = *--from;
00621         to = term;
00622         *to++ = term[0]+4+ARGHEAD+FUNHEAD;
00623         *to++ = code[3];
00624         *to++ = ii+FUNHEAD+ARGHEAD;
00625         *to++ = 1; /* set dirty flags, because there could be a fast notation */
00626         FILLFUN3(to)
00627         *to++ = ii+ARGHEAD;
00628         *to++ = 1;
00629         FILLARG(to)
00630         return(0);
00631     }
00632     /*
00633     First we save the old bracket variables. Then we set variables to
00634     influence the PutBracket routine and call it.
00635     After that we set the values back and sort out the results by placing the
00636     inside of the bracket inside the function.
00637     */
00638     termout = AT.WorkPointer;
00639     oldbuf = AT.BrackBuf;
00640     oldon = AR.BracketOn;
00641     oldact = AT.PolyAct;

```




```

00642     AR.BracketOn = -code[2];
00643     AT.BrackBuf  = code+4;
00644     AT.PolyAct = 0;
00645     error = PutBracket(BHEAD term);
00646     AT.PolyAct = oldact;
00647     AT.BrackBuf = oldbuf;
00648     AR.BracketOn = oldon;
00649     if ( error ) return(error);
00650     i = *termout; from = termout; to = term;
00651     NCOPY(to,from,i);
00652     tStop = term +*term; tStop -= tStop[-1];
00653     t = term+1;
00654     while ( t < tStop && *t != HAAKJE ) t += t[1];
00655     from = term + *term;
00656     inc = FUNHEAD+ARGHEAD-t[1]+1;
00657     tt = t + t[1];
00658     argsize = from-tt+1;
00659     to = from + inc;
00660     to[0] = 1;
00661     to[1] = 1;
00662     to[2] = 3;
00663     while ( from > tt ) *--to = *--from;
00664     *--to = argsize;
00665     *t++ = code[3];
00666     *t++ = argsize+FUNHEAD+ARGHEAD;
00667     *t++ = 1;
00668     FILLFUN3(t);
00669     *t++ = argsize+ARGHEAD;
00670     *t++ = 1;
00671     FILLARG(t);
00672     *term += inc+3;
00673     AT.WorkPointer = term+*term;
00674     if ( Normalize(BHEAD term) ) error = 1;
00675     return(error);
00676 }
00677
00678 /*
00679 #] PutInside :
00680 */
00681
00682 /*
00683 The next routines are for indexing the local output files in a parallel
00684 sort. This indexing is needed to get a fast determination of the
00685 splitting terms needed to divide the terms evenly over the processors.
00686 Actually this method works well for ParFORM, but may not work well
00687 for TFORM.
00688
00689 #[ PutTermInIndex :
00690
00691 Puts a term in the term index.
00692 Action:
00693     if the index hasn't reached its full size
00694         if there is room, put the term
00695         if there is no room: extend the buffer, put the term
00696     else
00697         check if the last term has a number of the type skip*m+1
00698         if no, overwrite the last term
00699         if yes, check whether there is room for one more term
00700             yes: add the term
00701             no: drop all even terms, compress the list,
00702                 multiply skip by 2, and add this term.
00703
00704 int PutTermInIndex(WORD *term,POSITION *position)
00705 {
00706     return(0);
00707 }
00708
00709 #] PutTermInIndex :
00710 */

```

4.66 inivar.h File Reference

This graph shows which files directly or indirectly include this file:



Data Structures

- struct **fixedfun**

Variables

- [FIXEDGLOBALS](#) FG
- [ALLGLOBALS](#) A
- [FIXEDSET](#) fixedsets []
- UBYTE [BufferForOutput](#) [MAXLINELENGTH+14]
- char * [setupfilename](#) = "form.set"

4.66.1 Detailed Description

Contains the initialization of a number of structs at compile time This file should only be included in the file [startup.c](#) !!!

Definition in file [inivar.h](#).

4.66.2 Variable Documentation

4.66.2.1 FG

[FIXEDGLOBALS](#) FG

Definition at line 34 of file [inivar.h](#).

4.66.2.2 A

[ALLGLOBALS](#) A

Definition at line 133 of file [inivar.h](#).

4.66.2.3 fixedsets

```
FIXEDSET fixedsets[]
```

Initial value:

```
= {
    {"pos_", "integers > 0", CSYMBOL, 0}
  , {"pos0_", "integers >= 0", CSYMBOL, 0}
  , {"neg_", "integers < 0", CSYMBOL, 0}
  , {"neg0_", "integers <= 0", CSYMBOL, 0}
  , {"even_", "even integers", CSYMBOL, 0}
  , {"odd_", "odd integers", CSYMBOL, 0}
  , {"int_", "all integers", CSYMBOL, 0}
  , {"symbol_", "only symbols", CSYMBOL, MAXPOSITIVE}
  , {"fixed_", "fixed indices", CINDEX, 0}
  , {"index_", "all indices", CINDEX, 0}
  , {"number_", "all rationals", CSYMBOL, 0}
  , {"dummyindices_", "dummy indices", CINDEX, 0}
  , {"vector_", "only vectors", CVECTOR, 0}
}
```

Definition at line 259 of file [inivar.h](#).

4.66.2.4 BufferForOutput

```
UBYTE BufferForOutput[MAXLINELENGTH+14]
```

Definition at line 275 of file [inivar.h](#).

4.66.2.5 setupfilename

```
char* setupfilename = "form.set"
```

Definition at line 277 of file [inivar.h](#).

4.67 inivar.h

[Go to the documentation of this file.](#)

```
00001
00007 /* #[] License : */
00008 /*
00009 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00010 * When using this file you are requested to refer to the publication
00011 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00012 * This is considered a matter of courtesy as the development was paid
00013 * for by FOM the Dutch physics granting agency and we would like to
00014 * be able to track its scientific use to convince FOM of its value
00015 * for the community.
00016 *
00017 * This file is part of FORM.
00018 *
00019 * FORM is free software: you can redistribute it and/or modify it under the
00020 * terms of the GNU General Public License as published by the Free Software
00021 * Foundation, either version 3 of the License, or (at your option) any later
00022 * version.
00023 *
00024 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00025 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00026 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00027 * details.
00028 *
00029 * You should have received a copy of the GNU General Public License along
00030 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00031 */
00032 /* #[] License : */
00033
```

```

00034 FIXEDGLOBALS FG = {
00035     {Traces                                     /* Dummy as zeroeth argument */
00036     ,Traces
00037     ,EpFCon
00038     ,RatioGen
00039     ,SymGen
00040     ,TenVec
00041     ,DoSumF1
00042     ,DoSumF2}
00043
00044     ,{TraceFind                                 /* Dummy as zeroeth argument */
00045     ,TraceFind
00046     ,EpFFind
00047     ,RatioFind
00048     ,SymFind
00049     ,TenVecFind}
00050
00051     ,{"symbol"
00052     , "index"
00053     , "vector"
00054     , "function"
00055     , "set"
00056     , "expression"
00057     , "dotproduct"
00058     , "number"
00059     , "subexp"
00060     , "delta"}
00061
00062     ,{"(local)"
00063     , "(skip/local)"
00064     , "(drop/local)"
00065     , "(dropped)"
00066     , "(global)"
00067     , "(skip/global)"
00068     , "(drop/global)"
00069     , "(dropped)"
00070     , "(stored)"
00071     , "(local-hidden)"
00072     , "(local-to be hidden)"
00073     , "(local-hidden-dropped)"
00074     , "(local-to be unhidden)"
00075     , "(global-hidden)"
00076     , "(global-to be hidden)"
00077     , "(global-hidden-dropped)"
00078     , "(global-to be unhidden)"
00079     , "(into-hide-local)"
00080     , "(into-hide-global)"
00081     , "(spectator)"
00082     , "(drop/spectator)"}
00083
00084     ,{" Functions"
00085     , " Commuting Functions"}
00086
00087     ,{"left      "
00088     , "active    "
00089     , "in output"}
00090
00091     ,(char *)0
00092     ,(char *)0
00093     ,(UBYTE *)"1"
00094     ,(WORD)0
00095     ,(WORD)0
00096     ,(WORD)0
00097     ,(WORD)0
00098
00099 /* ASCII table of character types. Note that on some computers this
00100 table may be different from the ASCII table.
00101
00102 -1 Illegal character
00103 0 Alphabetic character
00104 1 Digit
00105 2 . $ _ ? # or '
00106 3 [,]
00107 4 ( ) = ; or ,
00108 5 + - * % / ^ :
00109 6 blank, tab, linefeed
00110 7 {,|,}
00111 8 ! & < >
00112 9 "
00113 10 The ultimate end.
00114 */
00115 ,{
00116     10,255,255,255,255,255,255,255,255,255, 6, 6,255,255, 6,255,255,
00117     255,255,255,255,255,255,255,255,255,255, 10,255,255,255,255,255,
00118     6, 8, 9, 2, 2, 5, 8, 2, 4, 4, 5, 5, 4, 5, 2, 5,
00119     1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 5, 4, 8, 4, 8, 2,
00120     255, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
00121     0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 3,255, 3, 5, 2,

```

```

00121         255, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
00122         0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 7, 7, 7, 255, 255,
00123         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00124         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00125         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00126         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00127         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00128         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00129         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255,
00130         255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255, 255 }
00131     };
00132
00133     ALLGLOBALS A;
00134     #ifdef WITHPTHREADS
00135     ALLPRIVATES **AB;
00136     #endif
00137
00138     static struct fixedfun {
00139         char *name;
00140         int        commu , tensor        , complx        , symmetric;
00141     } fixedfunctions[] = {
00142         {"exp_" , 1, 0, 0, 0} /* EXPONENT */
00143         , {"denom_" , 1, 0, 0, 0} /* DENOMINATOR */
00144         , {"setfun_" , 1, 0, 0, 0} /* SETFUNCTION */
00145         , {"g_" , 1, GAMMAFUNCTION, VARTYPEIMAGINARY, 0} /* GAMMA */
00146         , {"gi_" , 1, GAMMAFUNCTION, VARTYPEIMAGINARY, 0} /* GAMMAI */
00147         , {"g5_" , 1, GAMMAFUNCTION, VARTYPEIMAGINARY, 0} /* GAMMAFIVE */
00148         , {"g6_" , 1, GAMMAFUNCTION, VARTYPEIMAGINARY, 0} /* GAMMASIX */
00149         , {"g7_" , 1, GAMMAFUNCTION, VARTYPEIMAGINARY, 0} /* GAMMASEVEN */
00150         , {"sum_" , 1, 0, 0, 0} /* SUMF1 */
00151         , {"sump_" , 1, 0, 0, 0} /* SUMF2 */
00152         , {"dum_" , 1, 0, 0, 0} /* DUMFUN */
00153         , {"replace_" , 0, 0, 0, 0} /* REPLACEMENT */
00154         , {"reverse_" , 1, 0, 0, 0} /* REVERSEFUNCTION */
00155         , {"distrib_" , 1, 0, 0, 0} /* DISTRIBUTION */
00156         , {"dd_" , 0, TENSORFUNCTION, 0, 0} /* DELTA3 */
00157         , {"dummy_" , 0, 0, 0, 0} /* DUMMYFUN */
00158         , {"dummyten_" , 0, TENSORFUNCTION, 0, 0} /* DUMMYTEN */
00159         , {"e_" , 0, TENSORFUNCTION|1, VARTYPEIMAGINARY, ANTISYMMETRIC}
00160         /* LEVICIVITA */
00161         , {"fac_" , 0, 0, 0, 0} /* FACTORIAL */
00162         , {"invfac_" , 0, 0, 0, 0} /* INVERSEFACTORIAL */
00163         , {"binom_" , 0, 0, 0, 0} /* BINOMIAL */
00164         , {"nargs_" , 0, 0, 0, 0} /* NUMARGSFUN */
00165         , {"sign_" , 0, 0, 0, 0} /* SIGNFUN */
00166         , {"mod_" , 0, 0, 0, 0} /* MODFUNCTION */
00167         , {"mod2_" , 0, 0, 0, 0} /* MOD2FUNCTION */
00168         , {"min_" , 0, 0, 0, 0} /* MINFUNCTION */
00169         , {"max_" , 0, 0, 0, 0} /* MAXFUNCTION */
00170         , {"abs_" , 0, 0, 0, 0} /* ABSFUNCTION */
00171         , {"sig_" , 0, 0, 0, 0} /* SIGFUNCTION */
00172         , {"integer_" , 0, 0, 0, 0} /* INTFUNCTION */
00173         , {"theta_" , 0, 0, 0, 0} /* THETA */
00174         , {"thetap_" , 0, 0, 0, 0} /* THETA2 */
00175         , {"delta_" , 0, 0, 0, 0} /* DELTA2 */
00176         , {"deltap_" , 0, 0, 0, 0} /* DELTAP */
00177         , {"bernoulli_" , 0, 0, 0, 0} /* BERNOULLIFUNCTION */
00178         , {"count_" , 0, 0, 0, 0} /* COUNTFUNCTION */
00179         , {"match_" , 0, 0, 0, 0} /* MATCHFUNCTION */
00180         , {"pattern_" , 0, 0, VARTYPECOMPLEX, 0} /* PATTERNFUNCTION */
00181         , {"term_" , 1, 0, 0, 0} /* TERMFUNCTION */
00182         , {"conjg_" , 1, 0, VARTYPECOMPLEX, 0} /* CONJUGATEFUNCTION */
00183         , {"root_" , 0, 0, 0, 0} /* ROOTFUNCTION */
00184         , {"table_" , 1, 0, 0, 0} /* TABLEFUNCTION */
00185         , {"firstbracket_" , 0, 0, 0, 0} /* FIRSTBRACKET */
00186         , {"termsin_" , 0, 0, 0, 0} /* TERMSINEXPR */
00187         , {"nterms_" , 0, 0, 0, 0} /* NUMTERMSFUN */
00188         , {"gcd_" , 0, 0, 0, 0} /* GCDFUNCTION */
00189         , {"div_" , 0, 0, 0, 0} /* DIVFUNCTION */
00190         , {"rem_" , 0, 0, 0, 0} /* REMFUNCTION */
00191         , {"maxpowerof_" , 0, 0, 0, 0} /* MAXPOWEROF */
00192         , {"minpowerof_" , 0, 0, 0, 0} /* MINPOWEROF */
00193         , {"tbl_" , 0, 0, 0, 0} /* TABLESTUB */
00194         , {"factorin_" , 0, 0, 0, 0} /* FACTORIN */
00195         , {"termsinbracket_" , 0, 0, 0, 0} /* TERMSINBRACKET */
00196         , {"farg_" , 0, 0, 0, 0} /* WILDARGFUN */
00197     /*
00198         The following names are reserved for the floating point library.
00199         As long as we have no floating point numbers they do not do anything.
00200     */
00201     , {"sqrt_" , 0, 0, 0, 0} /* SQRTFUNCTION */
00202     , {"ln_" , 0, 0, 0, 0} /* LNFUNTION */
00203     , {"sin_" , 0, 0, 0, 0} /* SINFUNTION */
00204     , {"cos_" , 0, 0, 0, 0} /* COSFUNCTION */
00205     , {"tan_" , 0, 0, 0, 0} /* TANFUNCTION */
00206     , {"asin_" , 0, 0, 0, 0} /* ASINFUNTION */
00207     , {"acos_" , 0, 0, 0, 0} /* ACOSFUNCTION */

```


```

00208     ,{"atan_"      ,0,0      ,0      ,0} /* ATANFUNCTION */
00209     ,{"atan2_"     ,0,0      ,0      ,0} /* ATAN2FUNCTION */
00210     ,{"sinh_"      ,0,0      ,0      ,0} /* SINHFUNCTION */
00211     ,{"cosh_"      ,0,0      ,0      ,0} /* COSHFUNCTION */
00212     ,{"tanh_"      ,0,0      ,0      ,0} /* TANHFUNCTION */
00213     ,{"asinh_"     ,0,0      ,0      ,0} /* ASINHFUNCTION */
00214     ,{"acosh_"     ,0,0      ,0      ,0} /* ACOSHFUNCTION */
00215     ,{"atanh_"     ,0,0      ,0      ,0} /* ATANHFUNCTION */
00216     ,{"li2_"       ,0,0      ,0      ,0} /* LI2FUNCTION */
00217     ,{"lin_"       ,0,0      ,0      ,0} /* LINFUNCTION */
00218 /*
00219     From here on we continue with new functions (26-sep-2010)
00220 */
00221     ,{"extrasymbol_" ,0,0      ,0      ,0} /* EXTRASYMFUN */
00222     ,{"random_"      ,0,0      ,0      ,0} /* RANDOMFUNCTION */
00223     ,{"ranperm_"     ,1,0      ,0      ,0} /* RANPERM */
00224     ,{"numfactors_"  ,0,0      ,0      ,0} /* NUMFACTORS */
00225     ,{"firstterm_"   ,0,0      ,0      ,0} /* FIRSTTERM */
00226     ,{"content_"     ,0,0      ,0      ,0} /* CONTENTTERM */
00227     ,{"prime_"       ,0,0      ,0      ,0} /* PRIMENUMBER */
00228     ,{"exteuclidean_" ,0,0      ,0      ,0} /* EXTEUCLIDEAN */
00229     ,{"makerational_" ,0,0      ,0      ,0} /* MAKERATIONAL */
00230     ,{"inverse_"     ,0,0      ,0      ,0} /* INVERSEFUNCTION */
00231     ,{"id_"          ,1,0      ,0      ,0} /* IDFUNCTION */
00232     ,{"putfirst_"    ,1,0      ,0      ,0} /* PUTFIRST */
00233     ,{"perm_"        ,1,0      ,0      ,0} /* PERMUTATIONS */
00234     ,{"partitions_"  ,1,0      ,0      ,0} /* PARTITIONS */
00235     ,{"mul_"         ,0,0      ,0      ,0} /* MULFUNCTION */
00236     ,{"moebius_"     ,0,0      ,0      ,0} /* MOEBIUS */
00237     ,{"topologies_"  ,0,0      ,0      ,0} /* TOPOLOGIES */
00238     ,{"diagrams_"    ,0,0      ,0      ,0} /* DIAGRAMS */
00239     ,{"topo_"        ,0,0      ,0      ,0} /* TOPO */
00240     ,{"node_"        ,0,0      ,0      ,0} /* VERTEX */
00241     ,{"edge_"        ,0,0      ,0      ,0} /* EDGE */
00242     ,{"sizeof_"      ,0,0      ,0      ,0} /* SIZEOFFUNCTION */
00243     ,{"block_"       ,0,0      ,0      ,0} /* BLOCK */
00244     ,{"onepi_"       ,0,0      ,0      ,0} /* ONEPI */
00245     ,{"phi_"         ,0, VERTEXFUNCTION,0} /* PHI */
00246     ,{"float_"       ,0,0      ,0      ,0} /* FLOATFUN */
00247     ,{"tofloat_"     ,0,0      ,0      ,0} /* TOFLOAT */
00248     ,{"torat_"       ,0,0      ,0      ,0} /* TORAT */
00249     ,{"mzv_"         ,0,0      ,0      ,0} /* MZV */
00250     ,{"euler_"       ,0,0      ,0      ,0} /* EULER */
00251     ,{"mzvhalf_"     ,0,0      ,0      ,0} /* MZVHALF */
00252     ,{"agm_"         ,0,0      ,0      ,0} /* AGMFUNCTION */
00253     ,{"gamma_"       ,0,0      ,0      ,0} /* GAMMAFUN */
00254     ,{"eexp_"        ,0,0      ,0      ,0} /* EXPFUNCTION */
00255     ,{"hpl_"         ,0,0      ,0      ,0} /* HPLFUNCTION */
00256     ,{"mpl_"         ,0,0      ,0      ,0} /* MPLFUNCTION */
00257 };
00258
00259 FIXEDSET fixedsets[] = {
00260     {"pos_"      , "integers > 0", CSYMBOL, 0} /* POS_ 0 */
00261     ,{"pos0_"    , "integers >= 0", CSYMBOL, 0} /* POS0_ 1 */
00262     ,{"neg_"     , "integers < 0", CSYMBOL, 0} /* NEG_ 2 */
00263     ,{"neg0_"    , "integers <= 0", CSYMBOL, 0} /* NEG0_ 3 */
00264     ,{"even_"    , "even integers", CSYMBOL, 0} /* EVEN_ 4 */
00265     ,{"odd_"     , "odd integers", CSYMBOL, 0} /* ODD_ 5 */
00266     ,{"int_"     , "all integers", CSYMBOL, 0} /* Z_ 6 */
00267     ,{"symbol_"  , "only symbols", CSYMBOL, MAXPOSITIVE} /* SYMBOL_ 7 */
00268     ,{"fixed_"   , "fixed indices", CINDEX, 0} /* FIXED_ 8 */
00269     ,{"index_"   , "all indices", CINDEX, 0} /* INDEX_ 9 */
00270     ,{"number_"  , "all rationals", CSYMBOL, 0} /* Q_ 10 */
00271     ,{"dummyindices_" , "dummy indices", CINDEX, 0} /* DUMMYINDEX_ 11 */
00272     ,{"vector_"  , "only vectors", CVECTOR, 0} /* VECTOR_ 12 */
00273 };
00274
00275 UBYTE BufferForOutput[MAXLINELENGTH+14];
00276
00277 char *setupfilename = "form.set";
00278
00279 #ifdef WITHPTHREADS
00280 INILOCK(ErrorMessageLock)
00281 INILOCK(FileReadLock)
00282 #endif

```

4.68 lus.c File Reference

#include "form3.h"
 Include dependency graph for lus.c:

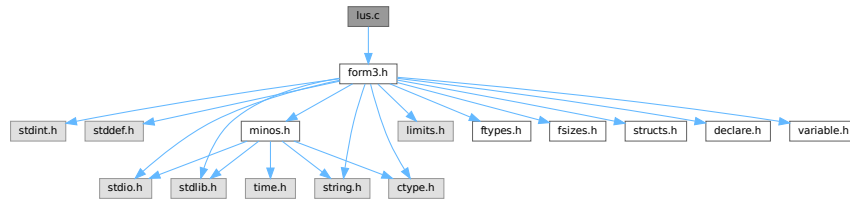

Functions

- int [Lus](#) (WORD *term, WORD funnum, WORD loopsize, WORD numargs, WORD outfun, WORD mode)
- int [FindLus](#) (int from, int level, int openindex)
- int [SortTheList](#) (int *slist, int num)
- int [AllLoops](#) (PHEAD WORD *term, WORD level)
- LONG [StartLoops](#) (PHEAD WORD *term, WORD level, LONG vert, WORD nvert, WORD *arglist, WORD nargs, WORD *loop, WORD nloop)
- LONG [GenLoops](#) (PHEAD WORD *term, WORD level, LONG vert, WORD nvert, WORD *arglist, WORD nargs, WORD *loop, WORD nloop)
- void [LoopOutput](#) (PHEAD WORD *term, WORD level, WORD *loop, WORD nloop)
- int [AllPaths](#) (PHEAD WORD *term, WORD level)
- LONG [GenPaths](#) (PHEAD WORD *term, WORD level, LONG vert, WORD nvert, WORD *arglist, WORD nargs, WORD *path, WORD npath)
- void [PathOutput](#) (PHEAD WORD *term, WORD level, WORD *path, WORD npath)
- WORD [AllOnePI](#) (WORD *term, WORD level)
- int [RemoveBridges](#) (void)
- int [TakeOneLine](#) (WORD *term, WORD level)
- int [OutputOnePI](#) (PHEAD WORD *term, WORD level)

4.68.1 Detailed Description

Routines to find loops in index contractions. These routines allow for a category of topological statements. They were originally developed for the color library.

Definition in file [lus.c](#).

4.68.2 Function Documentation

4.68.2.1 Lus()

```

int Lus (
    WORD * term,
    WORD funnum,
    WORD loopsize,
    WORD numargs,
    WORD outfun,
    WORD mode )

```

Definition at line 57 of file [lus.c](#).

4.68.2.2 FindLus()

```
int FindLus (
    int from,
    int level,
    int openindex )
```

Definition at line [515](#) of file [lus.c](#).

4.68.2.3 SortTheList()

```
int SortTheList (
    int * slist,
    int num )
```

Definition at line [578](#) of file [lus.c](#).

4.68.2.4 AllLoops()

```
int AllLoops (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [650](#) of file [lus.c](#).

4.68.2.5 StartLoops()

```
LONG StartLoops (
    PHEAD WORD * term,
    WORD level,
    LONG vert,
    WORD nvert,
    WORD * arglist,
    WORD nargs,
    WORD * loop,
    WORD nloop )
```

Definition at line [894](#) of file [lus.c](#).

4.68.2.6 GenLoops()

```
LONG GenLoops (
    PHEAD WORD * term,
    WORD level,
    LONG vert,
    WORD nvert,
    WORD * arglist,
    WORD nargs,
    WORD * loop,
    WORD nloop )
```

Definition at line [980](#) of file [lus.c](#).

4.68.2.7 LoopOutput()

```
void LoopOutput (
    PHEAD WORD * term,
    WORD level,
    WORD * loop,
    WORD nloop )
```

Definition at line [1059](#) of file [lus.c](#).

4.68.2.8 AllPaths()

```
int AllPaths (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [1123](#) of file [lus.c](#).

4.68.2.9 GenPaths()

```
LONG GenPaths (
    PHEAD WORD * term,
    WORD level,
    LONG vert,
    WORD nvert,
    WORD * arglist,
    WORD nargs,
    WORD * path,
    WORD npath )
```

Definition at line [1413](#) of file [lus.c](#).

4.68.2.10 PathOutput()

```
void PathOutput (
    PHEAD WORD * term,
    WORD level,
    WORD * path,
    WORD npath )
```

Definition at line [1486](#) of file [lus.c](#).

4.68.2.11 AllOnePI()

```
WORD AllOnePI (
    WORD * term,
    WORD level )
```

Definition at line [1566](#) of file [lus.c](#).

4.68.2.12 RemoveBridges()

```
int RemoveBridges (
    void )
```

Definition at line 1586 of file [lus.c](#).

4.68.2.13 TakeOneLine()

```
int TakeOneLine (
    WORD * term,
    WORD level )
```

Definition at line 1596 of file [lus.c](#).

4.68.2.14 OutputOnePI()

```
int OutputOnePI (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1608 of file [lus.c](#).

4.69 lus.c

[Go to the documentation of this file.](#)

```
00001
00007 /* #[] License : */
00008 /*
00009 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00010 * When using this file you are requested to refer to the publication
00011 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00012 * This is considered a matter of courtesy as the development was paid
00013 * for by FOM the Dutch physics granting agency and we would like to
00014 * be able to track its scientific use to convince FOM of its value
00015 * for the community.
00016 *
00017 * This file is part of FORM.
00018 *
00019 * FORM is free software: you can redistribute it and/or modify it under the
00020 * terms of the GNU General Public License as published by the Free Software
00021 * Foundation, either version 3 of the License, or (at your option) any later
00022 * version.
00023 *
00024 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00025 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00026 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00027 * details.
00028 *
00029 * You should have received a copy of the GNU General Public License along
00030 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00031 */
00032 /* #[] License : */
00033 /*
00034 #[] Includes : lus.c
00035 */
00036
00037 #include "form3.h"
00038
00039 /*
00040 #[] Includes :
00041 #[] Lus :
00042
00043 Routine to find loops.
00044 Mode: 0: Just tell whether there is such a loop.
```

```

00045         1: Take out the functions and replace by outfun with the
00046             remaining arguments of the loop function
00047         > AM.OffsetIndex: This index must be included in the loop.
00048         < -AM.OffsetIndex: This index must be included in the loop. Replace.
00049     Return value: 0: no loop. 1: there is/was such a loop.
00050     funnum: the function(s) in which we look for a loop.
00051     numargs: the number of arguments admissible in the function.
00052     outfun: the output function in case of a substitution.
00053     loopsize: the size of the loop we are looking for.
00054             if < 0 we look for all loops.
00055 */
00056
00057 int Lus(WORD *term, WORD funnum, WORD loopsize, WORD numargs, WORD outfun, WORD mode)
00058 {
00059     GETIDENTITY
00060     WORD *w, *t, *tt, *m, *r, **loc, *tstop, minloopsize;
00061     int nfun, i, j, jj, k, n, sign = 0, action = 0, L, ten, ten2, totnum,
00062     sign2, *alist, *wi, mini, maxi, medi = 0;
00063     if ( numargs <= 1 ) return(0);
00064     GETSTOP(term,tstop);
00065 /*
00066     First count the number of functions with the proper number of arguments.
00067 */
00068     t = term+1; nfun = 0;
00069     if ( ( ten = functions[funnum-FUNCTION].spec ) >= TENSORFUNCTION ) {
00070         while ( t < tstop ) {
00071             if ( *t == funnum && t[1] == FUNHEAD+numargs ) { nfun++; }
00072             t += t[1];
00073         }
00074     }
00075     else {
00076         while ( t < tstop ) {
00077             if ( *t == funnum ) {
00078                 i = 0; m = t+FUNHEAD; t += t[1];
00079                 while ( m < t ) { i++; NEXTARG(m) }
00080                 if ( i == numargs ) nfun++;
00081             }
00082             else t += t[1];
00083         }
00084     }
00085     if ( loopsize < 0 ) minloopsize = 2;
00086     else minloopsize = loopsize;
00087     if ( funnum < minloopsize ) return(0); /* quick abort */
00088     if ( ((functions[funnum-FUNCTION].symmetric) & ~REVERSEORDER) == ANTISYMMETRIC ) sign = 1;
00089     if ( mode == 1 || mode < 0 ) {
00090         ten2 = functions[outfun-FUNCTION].spec >= TENSORFUNCTION;
00091     }
00092     else ten2 = -1;
00093 /*
00094     Allocations:
00095 */
00096     if ( AN.numflocs < funnum ) {
00097         if ( AN.funlocs ) M_free(AN.funlocs,"Lus: AN.funlocs");
00098         AN.numflocs = funnum;
00099         AN.funlocs = (WORD **)Malloc1(sizeof(WORD *)*AN.numflocs,"Lus: AN.funlocs");
00100     }
00101     if ( AN.numfargs < funnum*numargs ) {
00102         if ( AN.funargs ) M_free(AN.funargs,"Lus: AN.funargs");
00103         AN.numfargs = funnum*numargs;
00104         AN.funargs = (int *)Malloc1(sizeof(int *)*AN.numfargs,"Lus: AN.funargs");
00105     }
00106 /*
00107     Make a list of relevant indices
00108 */
00109     alist = AN.funargs; loc = AN.funlocs;
00110     t = term+1;
00111     if ( ten >= TENSORFUNCTION ) {
00112         while ( t < tstop ) {
00113             if ( *t == funnum && t[1] == FUNHEAD+numargs ) {
00114                 *loc++ = t;
00115                 t += FUNHEAD;
00116                 j = i = numargs; while ( --i >= 0 ) {
00117                     if ( *t >= AM.OffsetIndex &&
00118                         ( *t >= AM.OffsetIndex+WILDOFFSET ||
00119                           indices[*t-AM.OffsetIndex].dimension != 0 ) ) {
00119                         *alist++ = *t++; j--;
00120                     }
00121                     else t++;
00122                 }
00123                 while ( --j >= 0 ) *alist++ = -1;
00124             }
00125             else t += t[1];
00126         }
00127     }
00128     else {
00129         nfun = 0;
00130         while ( t < tstop ) {

```

```

00132         if ( *t == funnum ) {
00133             w = t;
00134             i = 0; m = t+FUNHEAD; t += t[1];
00135             while ( m < t ) { i++; NEXTARG(m) }
00136             if ( i == numargs ) {
00137                 m = w + FUNHEAD;
00138                 while ( m < t ) {
00139                     if ( *m == -INDEX && m[1] >= AM.OffsetIndex &&
00140                         ( m[1] >= AM.OffsetIndex+WILDOFFSET ||
00141                           indices[m[1]-AM.OffsetIndex].dimension != 0 ) ) {
00142                         *alist++ = m[1]; m += 2; i--;
00143                     }
00144                     else if ( ten2 >= TENSORFUNCTION && *m != -INDEX
00145                             && *m != -VECTOR && *m != -MINVECTOR &&
00146                             ( *m != -SNUMBER || *m < 0 || *m >= AM.OffsetIndex ) ) {
00147                         i = numargs; break;
00148                     }
00149                     else { NEXTARG(m) }
00150                 }
00151                 if ( i < numargs ) {
00152                     *loc++ = w;
00153                     nfun++;
00154                     while ( --i >= 0 ) *alist++ = -1;
00155                 }
00156             }
00157             else t += t[1];
00158         }
00159         if ( nfun < minloopsize ) return(0);
00160     }
00161 }
00162 /*
00163 We have now nfun objects. Not all indices may be usable though.
00164 If the list is not long, we use a quadratic algorithm to remove
00165 indices and vertices that cannot be used. If it becomes large we
00166 sort the list of available indices (and their multiplicity) and
00167 work with binary searches.
00168 */
00169 alist = AN.funargs; totnum = numargs*nfun;
00170 if ( nfun > 7 ) {
00171     if ( AN.funisize < totnum ) {
00172         if ( AN.funinds ) M_free(AN.funinds,"AN.funinds");
00173         AN.funisize = (totnum*3)/2;
00174         AN.funinds = (int *)Malloc1(AN.funisize*2*sizeof(int),"AN.funinds");
00175     }
00176     i = totnum; n = 0; wi = AN.funinds;
00177     while ( --i >= 0 ) {
00178         if ( *alist >= 0 ) { n++; *wi++ = *alist; *wi++ = 1; }
00179         alist++;
00180     }
00181     n = SortTheList(AN.funinds,n);
00182     do {
00183         action = 0;
00184         for ( i = 0; i < nfun; i++ ) {
00185             alist = AN.funargs + i*numargs;
00186             jj = numargs;
00187             for ( j = 0; j < jj; j++ ) {
00188                 if ( alist[j] < 0 ) break;
00189                 mini = 0; maxi = n-1;
00190                 while ( mini <= maxi ) {
00191                     medi = (mini + maxi) / 2; k = AN.funinds[2*medi];
00192                     if ( alist[j] > k ) mini = medi + 1;
00193                     else if ( alist[j] < k ) maxi = medi - 1;
00194                     else break;
00195                 }
00196                 if ( AN.funinds[2*medi+1] <= 1 ) {
00197                     (AN.funinds[2*medi+1])--;
00198                     jj--; k = j; while ( k < jj ) { alist[k] = alist[k+1]; k++; }
00199                     alist[jj] = -1; j--;
00200                 }
00201             }
00202             if ( jj < 2 ) {
00203                 if ( jj == 1 ) {
00204                     mini = 0; maxi = n-1;
00205                     while ( mini <= maxi ) {
00206                         medi = (mini + maxi) / 2; k = AN.funinds[2*medi];
00207                         if ( alist[0] > k ) mini = medi + 1;
00208                         else if ( alist[0] < k ) maxi = medi - 1;
00209                         else break;
00210                     }
00211                     (AN.funinds[2*medi+1])--;
00212                     if ( AN.funinds[2*medi+1] == 1 ) action++;
00213                 }
00214                 nfun--; totnum -= numargs; AN.funlocs[i] = AN.funlocs[nfun];
00215                 wi = AN.funargs + nfun*numargs;
00216                 for ( j = 0; j < numargs; j++ ) alist[j] = *wi++;
00217                 i--;
00218             }

```

```

00219     }
00220     } while ( action );
00221 }
00222 else {
00223     for ( i = 0; i < totnum; i++ ) {
00224         if ( alist[i] == -1 ) continue;
00225         for ( j = 0; j < totnum; j++ ) {
00226             if ( alist[j] == alist[i] && j != i ) break;
00227         }
00228         if ( j >= totnum ) alist[i] = -1;
00229     }
00230     do {
00231         action = 0;
00232         for ( i = 0; i < nfun; i++ ) {
00233             alist = AN.funargs + i*numargs;
00234             n = numargs;
00235             for ( k = 0; k < n; k++ ) {
00236                 if ( alist[k] < 0 ) { alist[k--] = alist[--n]; alist[n] = -1; }
00237             }
00238             if ( n <= 1 ) {
00239                 if ( n == 1 ) { j = alist[0]; }
00240                 else j = -1;
00241                 nfun--; totnum -= numargs; AN.funlocs[i] = AN.funlocs[nfun];
00242                 wi = AN.funargs + nfun * numargs;
00243                 for ( k = 0; k < numargs; k++ ) alist[k] = wi[k];
00244                 i--;
00245                 if ( j >= 0 ) {
00246                     for ( k = 0, jj = 0, wi = AN.funargs; k < totnum; k++, wi++ ) {
00247                         if ( *wi == j ) { jj++; if ( jj > 1 ) break; }
00248                     }
00249                     if ( jj <= 1 ) {
00250                         for ( k = 0, wi = AN.funargs; k < totnum; k++, wi++ ) {
00251                             if ( *wi == j ) { *wi = -1; action = 1; }
00252                         }
00253                     }
00254                 }
00255             }
00256         }
00257     } while ( action );
00258 }
00259 if ( nfun < minloopsz ) return(0);
00260 /*
00261 Now we have nfun objects, each with at least 2 indices, each of which
00262 occurs at least twice in our list. There will be a loop!
00263 */
00264 if ( mode != 0 && mode != 1 ) {
00265     if ( mode > 0 ) AN.tohunt = mode - 5;
00266     else AN.tohunt = -mode - 5;
00267     AN.nargs = numargs; AN.numoffuns = nfun;
00268     i = 0;
00269     if ( loopsize < 0 ) {
00270         if ( loopsize == -1 ) k = nfun;
00271         else { k = -loopsize-1; if ( k > nfun ) k = nfun; }
00272         for ( L = 2; L <= k; L++ ) {
00273             if ( FindLus(0,L,AN.tohunt) ) goto Success;
00274         }
00275     }
00276     else if ( FindLus(0,loopsize,AN.tohunt) ) { L = loopsize; goto Success; }
00277 }
00278 else {
00279     AN.nargs = numargs; AN.numoffuns = nfun;
00280     if ( loopsize < 0 ) {
00281         jj = 2; k = nfun;
00282         if ( loopsize < -1 ) { k = -loopsize-1; if ( k > nfun ) k = nfun; }
00283     }
00284     else { jj = k = loopsize; }
00285     for ( L = jj; L <= k; L++ ) {
00286         for ( i = 0; i <= nfun-L; i++ ) {
00287             alist = AN.funargs + i * numargs;
00288             for ( jj = 0; jj < numargs; jj++ ) {
00289                 if ( alist[jj] < 0 ) continue;
00290                 AN.tohunt = alist[jj];
00291                 for ( j = jj+1; j < numargs; j++ ) {
00292                     if ( alist[j] < 0 ) continue;
00293                     if ( FindLus(i+1,L-1,alist[j]) ) {
00294                         alist[0] = alist[jj];
00295                         alist[1] = alist[j];
00296                         goto Success;
00297                     }
00298                 }
00299             }
00300         }
00301     }
00302 }
00303 return(0);
00304 Success;
00305 if ( mode == 0 || mode > 1 ) return(1);

```

```

00306 /*
00307 Now we have to make the replacement and fix the potential sign
00308 */
00309 sign2 = 1;
00310 wi = AN.funargs + i*numargs; loc = AN.funlocs + i;
00311 for ( k = 0; k < L; k++ ) *(loc[k]) = -1;
00312 if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
00313 w = AT.WorkPointer + 1;
00314 m = t = term + 1;
00315 while ( t < tstop ) {
00316     if ( *t == -1 ) break;
00317     t += t[1];
00318 }
00319 while ( m < t ) *w++ = *m++;
00320 r = w;
00321 *w++ = outfun;
00322 w++;
00323 *w++ = DIRTYFLAG;
00324 FILLFUN3(w)
00325 if ( functions[outfun-FUNCTION].spec >= TENSORFUNCTION ) {
00326     if ( ten >= TENSORFUNCTION ) {
00327         for ( i = 0; i < L; i++ ) {
00328             alist = wi + i*numargs;
00329             m = loc[i] + FUNHEAD;
00330             for ( k = 0; k < numargs; k++ ) {
00331                 if ( m[k] == alist[0] ) {
00332                     if ( k != 0 ) {
00333                         jj = m[k]; m[k] = m[0]; m[0] = jj;
00334                         sign = -sign;
00335                     }
00336                     break;
00337                 }
00338             }
00339             for ( k = 1; k < numargs; k++ ) {
00340                 if ( m[k] == alist[1] ) {
00341                     if ( k != 1 ) {
00342                         jj = m[k]; m[k] = m[1]; m[1] = jj;
00343                         sign = -sign;
00344                     }
00345                     break;
00346                 }
00347             }
00348             m += 2;
00349             for ( k = 2; k < numargs; k++ ) *w++ = *m++;
00350         }
00351     }
00352     else {
00353         WORD *t1, *t2, *t3;
00354         for ( i = 0; i < L; i++ ) {
00355             alist = wi + i*numargs;
00356             tt = loc[i];
00357             m = tt + FUNHEAD;
00358             for ( k = 0; k < numargs; k++ ) {
00359                 if ( *m == -INDEX && m[1] == alist[0] ) {
00360                     if ( k != 0 ) {
00361                         if ( ( k & 1 ) != 0 ) sign = -sign;
00362                     }
00363                     now move to position 0
00364                 }
00365                 t2 = m+2; t1 = m; t3 = tt+FUNHEAD;
00366                 while ( t1 > t3 ) { *--t2 = *--t1; }
00367                 t3[0] = -INDEX; t3[1] = alist[0];
00368             }
00369             break;
00370         }
00371         NEXTARG(m)
00372     }
00373     m = tt + FUNHEAD + 2;
00374     for ( k = 1; k < numargs; k++ ) {
00375         if ( *m == -INDEX && m[1] == alist[1] ) {
00376             if ( k != 1 ) {
00377                 if ( ( k & 1 ) == 0 ) sign = -sign;
00378             }
00379             now move to position 1
00380         }
00381         t2 = m+2; t1 = m; t3 = tt+FUNHEAD+2;
00382         while ( t1 > t3 ) { *--t2 = *--t1; }
00383         t3[0] = -INDEX; t3[1] = alist[1];
00384     }
00385     break;
00386 }
00387 NEXTARG(m)
00388 }
00389 /*
00390 now copy the remaining arguments to w
00391 keep in mind that the output function is a tensor!
00392 */

```

```

00393         t1 = tt + FUNHEAD + 4;
00394         t2 = tt + tt[1];
00395         while ( t1 < t2 ) {
00396             if ( *t1 == -INDEX || *t1 == -VECTOR ) {
00397                 *w++ = t1[1]; t1 += 2;
00398             }
00399             else if ( *t1 == -MINVECTOR ) {
00400                 *w++ = t1[1]; t1 += 2; sign2 = -sign2;
00401             }
00402             else if ( ( *t1 == -SNUMBER ) && ( t1[1] >= 0 ) && ( t1[1] < AM.OffsetIndex ) ) {
00403                 *w++ = t1[1]; t1 += 2; sign2 = -sign2;
00404             }
00405             else {
00406                 MLOCK(ErrorMessageLock);
00407                 MesPrint("Illegal attempt to use a non-index-like argument in a tensor in
ReplaceLoop statement");
00408                 MUNLOCK(ErrorMessageLock);
00409                 Terminate(-1);
00410             }
00411         }
00412     }
00413 }
00414 }
00415 else {
00416     if ( ten >= TENSORFUNCTION ) {
00417         for ( i = 0; i < L; i++ ) {
00418             alist = wi + i*numargs;
00419             m = loc[i] + FUNHEAD;
00420             for ( k = 0; k < numargs; k++ ) {
00421                 if ( m[k] == alist[0] ) {
00422                     if ( k != 0 ) {
00423                         jj = m[k]; m[k] = m[0]; m[0] = jj;
00424                         sign = -sign;
00425                         break;
00426                     }
00427                 }
00428             }
00429             for ( k = 1; k < numargs; k++ ) {
00430                 if ( m[k] == alist[1] ) {
00431                     if ( k != 1 ) {
00432                         jj = m[k]; m[k] = m[1]; m[1] = jj;
00433                         sign = -sign;
00434                         break;
00435                     }
00436                 }
00437             }
00438             m += 2;
00439             for ( k = 2; k < numargs; k++ ) {
00440                 if ( *m >= AM.OffsetIndex ) { *w++ = -INDEX; }
00441                 else if ( *m < 0 ) { *w++ = -VECTOR; }
00442                 else { *w = -SNUMBER; }
00443                 *w++ = *m++;
00444             }
00445         }
00446     }
00447     else {
00448         WORD *t1, *t2, *t3;
00449         for ( i = 0; i < L; i++ ) {
00450             alist = wi + i*numargs;
00451             tt = loc[i];
00452             m = tt + FUNHEAD;
00453             for ( k = 0; k < numargs; k++ ) {
00454                 if ( *m == -INDEX && m[1] == alist[0] ) {
00455                     if ( k != 0 ) {
00456                         if ( ( k & 1 ) != 0 ) sign = -sign;
00457                     /*
00458                         now move to position 0
00459                     */
00460                     t2 = m+2; t1 = m; t3 = tt+FUNHEAD;
00461                     while ( t1 > t3 ) { *--t2 = *--t1; }
00462                     t3[0] = -INDEX; t3[1] = alist[0];
00463                 }
00464                 break;
00465             }
00466             NEXTARG(m)
00467         }
00468         m = tt + FUNHEAD + 2;
00469         for ( k = 1; k < numargs; k++ ) {
00470             if ( *m == -INDEX && m[1] == alist[1] ) {
00471                 if ( k != 1 ) {
00472                     if ( ( k & 1 ) == 0 ) sign = -sign;
00473                 /*
00474                     now move to position 1
00475                 */
00476                 t2 = m+2; t1 = m; t3 = tt+FUNHEAD+2;
00477                 while ( t1 > t3 ) { *--t2 = *--t1; }
00478                 t3[0] = -INDEX; t3[1] = alist[1];

```

```

00479             }
00480             break;
00481         }
00482         NEXTARG(m)
00483     }
00484     /*
00485         now copy the remaining arguments to w
00486     */
00487     t1 = tt + FUNHEAD + 4;
00488     t2 = tt + tt[1];
00489     while ( t1 < t2 ) *w++ = *t1++;
00490 }
00491 }
00492 }
00493 r[1] = w-r;
00494 while ( t < tstop ) {
00495     if ( *t == -1 ) { t += t[1]; continue; }
00496     i = t[1];
00497     NCOPY(w,t,i)
00498 }
00499 tstop = term + *term;
00500 while ( t < tstop ) *w++ = *t++;
00501 if ( sign < 0 ) w[-1] = -w[-1];
00502 i = w - AT.WorkPointer;
00503 *AT.WorkPointer = i;
00504 t = term; w = AT.WorkPointer;
00505 NCOPY(t,w,i)
00506 *AN.RepPoint = 1; /* For Repeat */
00507 return(1);
00508 }
00509
00510 /*
00511 #] Lus :
00512 #[ FindLus :
00513 */
00514
00515 int FindLus(int from, int level, int openindex)
00516 {
00517     GETIDENTITY
00518     int i, j, k, jj, *alist, *blist, *w, *m, partner;
00519     WORD **loc = AN.funlocs, *wor;
00520     if ( level == 1 ) {
00521         for ( i = from; i < AN.numoffuns; i++ ) {
00522             alist = AN.funargs + i*AN.nargs;
00523             for ( j = 0; j < AN.nargs; j++ ) {
00524                 if ( alist[j] == openindex ) {
00525                     for ( k = 0; k < AN.nargs; k++ ) {
00526                         if ( k == j ) continue;
00527                         if ( alist[k] == AN.tohunt ) {
00528                             loc[from] = loc[i];
00529                             alist = AN.funargs + from*AN.nargs;
00530                             alist[0] = openindex; alist[1] = AN.tohunt;
00531                             return(1);
00532                         }
00533                     }
00534                 }
00535             }
00536         }
00537     }
00538     else {
00539         for ( i = from; i < AN.numoffuns; i++ ) {
00540             alist = AN.funargs + i*AN.nargs;
00541             for ( j = 0; j < AN.nargs; j++ ) {
00542                 if ( alist[j] == openindex ) {
00543                     if ( from != i ) {
00544                         wor = loc[i]; loc[i] = loc[from]; loc[from] = wor;
00545                         blist = w = AN.funargs + from*AN.nargs;
00546                         m = alist;
00547                         k = AN.nargs;
00548                         while ( --k >= 0 ) { jj = *m; *m++ = *w; *w++ = jj; }
00549                     }
00550                     else blist = alist;
00551                     for ( k = 0; k < AN.nargs; k++ ) {
00552                         if ( k == j || blist[k] < 0 ) continue;
00553                         partner = blist[k];
00554                         if ( FindLus(from+1, level-1, partner) ) {
00555                             blist[0] = openindex; blist[1] = partner;
00556                             return(1);
00557                         }
00558                     }
00559                     if ( from != i ) {
00560                         wor = loc[i]; loc[i] = loc[from]; loc[from] = wor;
00561                         w = AN.funargs + from*AN.nargs;
00562                         m = alist;
00563                         k = AN.nargs;
00564                         while ( --k >= 0 ) { jj = *m; *m++ = *w; *w++ = jj; }
00565                     }
00566                 }
00567             }
00568         }
00569     }
00570 }

```



```

00566     }
00567     }
00568     }
00569 }
00570 return(0);
00571 }
00572
00573 /*
00574 #] FindLus :
00575 #[ SortTheList :
00576 */
00577
00578 int SortTheList(int *slist, int num)
00579 {
00580     GETIDENTITY
00581     int i, nleft, nright, *t1, *t2, *t3, *rlist;
00582     if ( num <= 2 ) {
00583         if ( num <= 1 ) return(num);
00584         if ( slist[0] < slist[2] ) return(2);
00585         if ( slist[0] > slist[2] ) {
00586             i = slist[0]; slist[0] = slist[2]; slist[2] = i;
00587             i = slist[1]; slist[1] = slist[3]; slist[3] = i;
00588             return(2);
00589         }
00590         slist[1] += slist[3];
00591         return(1);
00592     }
00593     else {
00594         nleft = num/2; rlist = slist + 2*nleft;
00595         nright = SortTheList(rlist,num-nleft);
00596         nleft = SortTheList(slist,nleft);
00597         if ( AN.tlistsize < nleft ) {
00598             if ( AN.tlistbuf ) M_free(AN.tlistbuf,"AN.tlistbuf");
00599             AN.tlistsize = (nleft*3)/2;
00600             AN.tlistbuf = (int *)Malloc1(AN.tlistsize*2*sizeof(int),"AN.tlistbuf");
00601         }
00602         i = nleft; t1 = slist; t2 = AN.tlistbuf;
00603         while ( --i >= 0 ) { *t2++ = *t1++; *t2++ = *t1++; }
00604         i = nleft+nright; t1 = AN.tlistbuf; t2 = rlist; t3 = slist;
00605         while ( nleft > 0 && nright > 0 ) {
00606             if ( *t1 < *t2 ) {
00607                 *t3++ = *t1++; *t3++ = *t1++; nleft--;
00608             }
00609             else if ( *t1 > *t2 ) {
00610                 *t3++ = *t2++; *t3++ = *t2++; nright--;
00611             }
00612             else {
00613                 *t3++ = *t1++; t2++; *t3++ = (*t1++) + (*t2++); i--;
00614                 nleft--; nright--;
00615             }
00616         }
00617         while ( --nleft >= 0 ) { *t3++ = *t1++; *t3++ = *t1++; }
00618         while ( --nright >= 0 ) { *t3++ = *t2++; *t3++ = *t2++; }
00619         return(i);
00620     }
00621 }
00622
00623 /*
00624 #] SortTheList :
00625 #[ AllLoops :
00626
00627 Routine finds all possible loops that can be made in the
00628 arguments of the symmetric commuting vertex function v and creates
00629 for each loop a new term which is the original term times the loop.
00630 The occurrences of v can have different numbers of arguments.
00631 Each argument that occurs twice (and in different instances of v)
00632 in total will be considered.
00633
00634 The input parameters are in C->lhs[level] and are
00635 C->lhs[level][0] TYPEALLLOOPS
00636 C->lhs[level][1] 6
00637 C->lhs[level][2] Number of function v.
00638 C->lhs[level][3] Number of the output function loop.
00639 C->lhs[level][4] option1: the type of argument.
00640 C->lhs[level][5] option2: 0,1: what to do if no loop.
00641 Eligible arguments must be of the type SYMBOL, VECTOR, INDEX or SNUMBER.
00642 They must all be of the same type, indicated by option1.
00643 Extra restriction: In a loop, each v can be visited at most once.
00644 If there is no loop at all, option2 determines whether the term
00645 remains unmodified, or is replaced by zero.
00646 Function v can be either a regular function or a tensor.
00647 To facilitate this we copy the relevant arguments into the workspace.
00648 */
00649
00650 int AllLoops(PHEAD WORD *term,WORD level)
00651 {
00652     CBUF *C = cbuf+AM.rbufnum;

```

```

00653     WORD vcode = C->lhs[level][2];      /* The input function */
00654     WORD option1 = C->lhs[level][4];     /* type of argument */
00655     WORD option2 = C->lhs[level][5];     /* what to do when no loop */
00656     WORD *tstop, *t, *tend, *tstart, *tfrom;
00657     WORD i, j, jj;
00658     WORD *arglist, nargs, *loop, nloop;
00659     WORD *oldworkpointer = AT.WorkPointer;
00660     LONG oldpworkpointer = AT.pWorkPointer;
00661     LONG numgenerated = 0, vert;
00662     WORD *a, *a1, *a2, *a3, *v, *vv, nvert, *to, *from, *tos, action;
00663 /*
00664     Search for the first occurrence of vcode.
00665 */
00666     tstop = term+term; tstop -= ABS(tstop[-1]);
00667     t = term + 1;
00668     while ( t < tstop && *t != vcode ) t += t[1];
00669     if ( t == tstop ) {
00670         if ( option2 == 0 ) return(0);
00671         else return(Generator(BHEAD term,level));
00672     }
00673     tstart = t;
00674     nvert = 0;
00675     do {
00676         t += t[1]; nvert++;
00677     } while ( t < tstop && *t == vcode );
00678     tend = t;
00679 /*
00680     Make room for 2*nvert pointers
00681 */
00682     WantAddPointers(2*nvert);
00683     vert = AT.pWorkPointer;
00684     AT.pWorkPointer += 2*nvert;
00685     nvert = 0;
00686 /*
00687     Next we copy these functions into the workspace, but only the arguments
00688     that agree with option1. Because of the difference between tensors and
00689     regular functions in the copy we strip the type of the argument.
00690 */
00691     to = AT.WorkPointer;
00692     from = tstart;
00693     if ( functions[vcode-FUNCTION].spec == TENSORFUNCTION ) {
00694         from = tstart;
00695         while ( from < tend ) {
00696             tos = to++;
00697             tfrom = from+from[1];
00698             from += FUNHEAD;
00699             while ( from < tfrom ) {
00700                 if ( option1 == -INDEX && *from >= 0 ) {
00701                     *to++ = *from++;
00702                 }
00703                 else if ( option1 == -VECTOR && *from < 0 ) {
00704                     *to++ = *from++ - AM.OffsetVector;
00705                 }
00706                 else {
00707                     from++;
00708                 }
00709             }
00710             *tos = to-from;
00711             if ( *tos < 3 ) to = tos;
00712             else AT.pWorkspace[vert+nvert++] = tos;
00713         }
00714     }
00715     else if ( functions[vcode-FUNCTION].spec == 0 ) {
00716         from = tstart;
00717         while ( from < tend ) {
00718             tos = to++;
00719             tfrom = from + from[1];
00720             from += FUNHEAD;
00721             while ( from < tfrom ) {
00722                 if ( option1 == -VECTOR
00723                     && ( from[0] == -INDEX || from[0] == -VECTOR )
00724                     && from[1] < 0 ) {
00725                     from++;
00726                     *to++ = *from++ - AM.OffsetVector;
00727                 }
00728                 else if ( option1 == *from ) {
00729                     from++; *to++ = *from++;
00730                 }
00731                 else {
00732                     NEXTARG(from);
00733                 }
00734             }
00735             *tos = to-tos;
00736             if ( *tos < 3 ) to = tos;
00737             else AT.pWorkspace[vert+nvert++] = tos;
00738         }
00739     }

```

```

00740     else {
00741         AT.WorkPointer = oldworkpointer;
00742         AT.pWorkPointer = oldpworkpointer;
00743         if ( option2 == 0 ) return(0);
00744         return(Generator(BHEAD term,level));
00745     }
00746     AT.WorkPointer = to;
00747     /*
00748     Now make a list of all relevant arguments.
00749     */
00750     a = arglist = AT.WorkPointer;
00751     for ( i = 0; i < nvert; i++ ) {
00752         v = AT.pWorkSpace[vert+i];
00753         j = *v-1; v++;
00754         NCOPY(a,v,j);
00755     }
00756     nargs = a-arglist;
00757     AT.WorkPointer = a;
00758     /*
00759     Now sort the list. Bubble type sort.
00760     */
00761     a1 = arglist; a2 = a1+1;
00762     while ( a2 < a ) {
00763         a3 = a2;
00764         while ( a3 > a1 && a3[-1] > a3[0] ) {
00765             EXCH(*a3,a3[-1]);
00766             a3--;
00767         }
00768         a2++;
00769     }
00770     /*
00771     Now remove the elements from the list that do not occur exactly twice.
00772     */
00773     a1 = arglist; a2 = a1; a3 = a1+nargs;
00774     while ( a2 < a3 ) {
00775         if ( a2+1 == a3 ) { break; }
00776         else if ( a2+2 == a3 ) {
00777             if ( a2[0] == a2[1] ) { *a1++ = a2[0]; }
00778             break;
00779         }
00780         else {
00781             if ( a2[0] != a2[1] ) { a2++; }
00782             else if ( a2[0] != a2[2] ) {
00783                 *a1++ = a2[0]; a2 += 2;
00784             }
00785             else {
00786                 a2++; while ( a2 < a3 && a2[-1] == a2[0] ) a2++;
00787             }
00788         }
00789     }
00790     nargs = a1-arglist;
00791     /*
00792     Now we need to redo the list of vertices and remove the elements
00793     that are not in our arglist.
00794     */
00795     do {
00796         action = 0;
00797         for ( i = 0; i < nvert; i++ ) {
00798             vv = v = AT.pWorkSpace[vert+i];
00799             v++;
00800             for ( j = 1; j < vv[0]; j++ ) {
00801                 for ( jj = 0; jj < nargs; jj++ ) {
00802                     if ( *v == arglist[jj] ) break;
00803                 }
00804                 if ( jj >= nargs ) { /* was not in the list */
00805                     vv[0] = vv[0]-1;
00806                     for ( jj = j; jj < vv[0]; jj++ ) vv[jj] = vv[jj+1];
00807                 }
00808                 v++;
00809             }
00810         }
00811     } /*
00812     Next we need to remove vertices that have only one object remaining.
00813     Also, the object can be removed from arglist. After that we go back
00814     to clean up the list.
00815     */
00816     for ( i = 0; i < nvert; i++ ) {
00817         vv = AT.pWorkSpace[vert+i];
00818         if ( vv[0] == 1 ) {
00819             AT.pWorkSpace[vert+i] = AT.pWorkSpace[vert+nvert-1];
00820             nvert--; i--; continue;
00821         }
00822         else if ( vv[0] == 2 ) {
00823             for ( j = 0; j < nargs; j++ ) {
00824                 if ( arglist[j] == vv[1] ) break;
00825             }
00826             while ( j < nargs-1 ) arglist[j] = arglist[j+1];

```

```

00827         nargs--;
00828         AT.pWorkspace[vert+i] = AT.pWorkspace[vert+nvert-1];
00829         nvert--; i--;
00830         action = 1;
00831     }
00832 }
00833 } while ( action );
00834 /*
00835 Because the user can remove tadpoles rather easily as in
00836 id v(?a,i?,?b,i?,?c) = v(?a,?b,?c)
00837 there is no need to avoid them as potential loops.
00838
00839 At this point we are ready to look for loops.
00840 We have
00841     arglist,nargs    list of eligible objects.
00842     vert,nvert       position in pWorkspace for vertices and their number.
00843                     The vertices themselves are in the Workspace.
00844     loop,nloop       The buildup of the loop.
00845 */
00846 loop = AT.WorkPointer;
00847 AT.WorkPointer += nargs;
00848 nloop = 0;
00849 numgenerated += StartLoops(BHEAD term,level,vert,nvert,arglist,nargs,loop,nloop);
00850 AT.WorkPointer = oldworkpointer;
00851 AT.pWorkPointer = oldpworkpointer;
00852
00853 if ( numgenerated == 0 && option2 != 0 ) return(Generator(BHEAD term,level));
00854 return(0);
00855 }
00856
00857 /*
00858 #] AllLoops :
00859 #[ StartLoops :
00860
00861 Algorithm.
00862 1: have a list of vertices and objects that can be part of the loops.
00863 2: starting with the first element of arglist, look for the two
00864    vertices that contain this object. The first is vstart.
00865 3: At the second, look at all possible objects to continue from here.
00866 4: For each, find the vertex with its partner.
00867 5: if the partner vertex is vstart, we have a loop. --> 9.
00868 6: The partner vertex is not allowed to be a vertex that we passed
00869    in the current build-up of the loop.
00870 7: Put the object in loop and increase nloop.
00871 8: Now sum over all allowed objects in the partner vertex. --> 4.
00872
00873 9: Create the function loop with the arguments from loop,nloop.
00874 10: If a reverse cyclic permutation gives a smaller result, drop this
00875     solution and continue with the last summing over objects at a vertex.
00876 11: If not, output the result by adding the function loop
00877     to the term and call Generator(term,level)
00878
00879 12: when all possibilities with the first element of arglist have been
00880     exhausted, raise arglist and lower nargs by one. --> 2
00881 13: when nargs == 1, we can stop.
00882
00883 The inclusion of a new object when we sum over the possibilities at a
00884 vertex can best be done in a recursion, because we have no idea how
00885 many nested loops we would otherwise need. Of course the recursion can
00886 be emulated, but that makes the algorithm rather messy.
00887
00888 We have two routines: StartLoops and GenLoops.
00889 StartLoops takes care of the first argument (and the summing over who
00890 is the first argument), while GenLoops treats an additional vertex until
00891 a loop is closed. GenLoops also sends completed loops off to Generator.
00892 */
00893
00894 LONG StartLoops(PHEAD WORD *term,WORD level,LONG vert,WORD nvert,
00895                 WORD *arglist,WORD nargs,WORD *loop,WORD nloop)
00896 {
00897     LONG numgenerated = 0;
00898     WORD *v, *vv, *vstart, istart, *vpartner, ipartner, j;
00899     while ( nargs > 1 ) {
00900 /*
00901     Look for a vertex with arglist[0]. This is our starting vertex.
00902     Next we look for its partner and we put arglist[0] in loop.
00903 */
00904         nloop = 0;
00905         loop[nloop++] = arglist[0];
00906         for ( istart = 0; istart < nvert; istart++ ) {
00907             vstart = AT.pWorkspace[vert+istart];
00908             v = vstart+1; vv = vstart + *vstart;
00909             do {
00910                 if ( *v == arglist[0] ) goto havestart;
00911                 v++;
00912             } while ( v < vv );
00913         }

```

```

00914 /*
00915     If we come here, we have a problem.
00916 */
00917     MesPrint("Internal error in StartLoops. Object not found.");
00918     Terminate(-1);
00919     return(-1);
00920 havestart:
00921     AT.pWorkSpace[vert+nvert] = vstart;
00922 /*
00923     Check for tadpole.
00924 */
00925     v++;
00926     while ( v < vv ) {
00927         if ( *v == arglist[0] ) { /* tadpole */
00928             LoopOutput(BHEAD term,level,loop,nloop);
00929             numgenerated++;
00930             goto nextarg;
00931         }
00932         v++;
00933     }
00934 /*
00935     Now the partner vertex.
00936 */
00937     for ( ipartner = istart+1; ipartner < nvert; ipartner++ ) {
00938         vpartner = AT.pWorkSpace[vert+ipartner];
00939         vv = vpartner+vpartner; v = vpartner+1;
00940         do {
00941             if ( *v == arglist[0] ) goto havepartner;
00942             v++;
00943         } while ( v < vv );
00944     }
00945     return(numgenerated);
00946 havepartner:
00947     AT.pWorkSpace[vert+nvert+1] = vpartner;
00948 /*
00949     Now we run through all other possibilities at vpartner.
00950     vv is still OK.
00951 */
00952     v = vpartner+1;
00953     while ( v < vv ) {
00954         if ( *v != arglist[0] ) {
00955             for ( j = 1; j < nargs; j++ ) {
00956                 if ( *v == arglist[j] ) {
00957                     loop[nloop++] = *v;
00958                     numgenerated += GenLoops(BHEAD term,level,vert,nvert,
00959                                             arglist,nargs,loop,nloop);
00960                     nloop--;
00961                     break;
00962                 }
00963             }
00964         }
00965         v++;
00966     }
00967 nextarg:
00968     arglist++; nargs--;
00969 }
00970 return(numgenerated);
00971 }
00972
00973 /*
00974 #] StartLoops :
00975 #[ GenLoops :
00976
00977 We enter with an open line in loop[nloop-1]
00978 */
00979
00980 LONG GenLoops(PHEAD WORD *term,WORD level,WORD vert,WORD nvert,
00981               WORD *arglist,WORD nargs,WORD *loop,WORD nloop)
00982 {
00983     LONG numgenerated = 0;
00984     WORD *vstart, *v, *vv, i, j, *vpartner;
00985 /*
00986     Start with checking whether the partner is in vstart (=vert[nvert])
00987 */
00988     vstart = AT.pWorkSpace[nvert];
00989     vv = vstart + *vstart; v = vstart+1;
00990     while ( v < vv ) {
00991         if ( *v == loop[nloop-1] ) {
00992 /*
00993             This closes the loop.
00994             Now we can output it.
00995 */
00996             LoopOutput(BHEAD term,level,loop,nloop);
00997             numgenerated++;
00998             return(numgenerated);
00999         }
01000         v++;

```

```

01001     }
01002  /*
01003     Start with finding the partner.
01004  */
01005     for ( i = 0; i < nvert; i++ ) {
01006         vpartner = AT.pWorkSpace[vert+i];
01007         if ( vpartner == vstart ) continue;
01008         for ( j = 0; j < nloop; j++ ) {
01009             if ( vpartner == AT.pWorkSpace[vert+nvert+j] ) break;
01010         }
01011         if ( j < nloop ) continue;
01012         v = vpartner+1; vv = vpartner + *vpartner;
01013         while ( v < vv ) {
01014             if ( *v == loop[nloop-1] ) {
01015  /*
01016                 Found the partner.
01017                 Now we can sum over the remaining permitted arguments of this vertex.
01018  */
01019                 v = vpartner + 1;
01020                 while ( v < vv ) {
01021  /*
01022                     *v should be in arglist.
01023  */
01024                     for ( j = 0; j < nargs; j++ ) {
01025                         if ( *v == arglist[j] ) break;
01026                     }
01027                     if ( j >= nargs ) { v++; continue; }
01028  /*
01029                     *v should not be in loops.
01030  */
01031                     for ( j = 0; j < nloop; j++ ) {
01032                         if ( *v == loop[j] ) break;
01033                     }
01034                     if ( j >= nloop ) {
01035                         AT.pWorkSpace[vert+nvert+nloop] = vpartner;
01036                         loop[nloop++] = *v;
01037                         numgenerated += GenLoops(BHEAD term,level,vert,nvert,
01038                                                 arglist,nargs,loop,nloop);
01039                         nloop--;
01040                     }
01041                     v++;
01042                 }
01043                 return(numgenerated);
01044             }
01045             v++;
01046         }
01047     }
01048  /*
01049     The partner is in a vertex we have finished before.
01050  */
01051     return(numgenerated);
01052 }
01053
01054  /*
01055     #] GenLoops :
01056     #[ LoopOutput :
01057  */
01058
01059 void LoopOutput(PHEAD WORD *term, WORD level, WORD *loop, WORD nloop)
01060 {
01061     CBUF *C = cbuf+AM.rbufnum;
01062     WORD loopfun = C->lhs[level][3]; /* The output function */
01063     WORD option1 = C->lhs[level][4]; /* type of argument */
01064     WORD *tstop, *tstop1, *t, *tt;
01065     WORD *outterm, *loop1;
01066     WORD i;
01067     tstop1 = term+*term; tstop = tstop1 - ABS(tstop1[-1]);
01068  /*
01069     Construct the rcycle symmetrized version of loop.
01070  */
01071     if ( nloop > 2 ) {
01072         loop1 = AT.WorkPointer;
01073         loop1[0] = loop[0];
01074         for ( i = 1; i < nloop; i++ ) { loop1[i] = loop[nloop-i]; }
01075         if ( loop1[1] < loop[1] ) {
01076             AT.WorkPointer += nloop;
01077             loop = loop1;
01078         }
01079     }
01080     outterm = AT.WorkPointer;
01081     tt = outterm; t = term;
01082     while ( t < tstop ) *tt++ = *t++;
01083     *tt++ = loopfun;
01084     if ( functions[loopfun-FUNCTION].spec == TENSORFUNCTION ) {
01085         *tt++ = FUNHEAD+nloop;
01086         FILLFUN(tt)
01087         if ( option1 == -VECTOR ) {

```

```

01088         for ( i = 0; i < nloop; i++ ) *tt++ = loop[i]+AM.OffsetVector;
01089     }
01090     else {
01091         for ( i = 0; i < nloop; i++ ) *tt++ = loop[i];
01092     }
01093 }
01094 else {
01095     *tt++ = FUNHEAD+nloop*2;
01096     FILLFUN(tt)
01097     for ( i = 0; i < nloop; i++ ) {
01098         *tt++ = option1;
01099         if ( option1 == -VECTOR ) *tt++ = loop[i] + AM.OffsetVector;
01100         else *tt++ = loop[i];
01101     }
01102 }
01103 while ( t < tstop1 ) *tt++ = *t++;
01104 *outterm = tt - outterm;
01105 AT.WorkPointer = tt;
01106 if ( Generator(BHEAD outterm,level) ) {
01107     MesCall("LoopOutput");
01108     Terminate(-1);
01109 }
01110 AT.WorkPointer = outterm;
01111 }
01112
01113 /*
01114 #] LoopOutput :
01115 #[ AllPaths :
01116
01117 This routine has many similarities with AllLoops.
01118 In AllLoops we have startingpoint and endpoint at the same vertex.
01119 In AllPaths the startingpoint and the endpoints are different and
01120 given in advance. This endfun can occur only twice.
01121 */
01122
01123 int AllPaths(PHEAD WORD *term,WORD level)
01124 {
01125     CBUF *C = cbuf+AM.rbufnum;
01126     WORD endcode = C->lhs[level][2]; /* The endpoint function */
01127     WORD vcode = C->lhs[level][3]; /* The intermediate function */
01128     WORD option1 = C->lhs[level][5]; /* type of argument */
01129     WORD option2 = C->lhs[level][6]; /* what to do when no loop */
01130     WORD *t, *tstop, *tendl, *tend2, *tstart, *tend, numend, nvert, npass;
01131     WORD *tfrom, *to, *tos, *from;
01132     WORD *arglist, nargs, *path, npath, *a, *a1, *a2, *a3;
01133     WORD i, j, jj, *v, *vv, action;
01134     LONG vert,vert1; /* ,vert2; */
01135     WORD numgenerated = 0;
01136     WORD *oldworkpointer = AT.WorkPointer;
01137     LONG oldpworkpointer = AT.pWorkPointer;
01138 /*
01139 Search for the two occurrences of endcode.
01140 */
01141 tstop = term+*term; tstop -= ABS(tstop[-1]);
01142 t = term + 1;
01143 while ( t < tstop && *t != endcode ) t += t[1];
01144 if ( t == tstop ) { /* no endpoints */
01145     if ( option2 == 0 ) return(0);
01146     else return(Generator(BHEAD term,level));
01147 }
01148 tendl = t;
01149 numend = 0;
01150 while ( t < tstop && *t == endcode ) { tend2 = t; t += t[1]; numend++; }
01151 if ( numend != 2 ) { /* not 2 endpoints -> no path */
01152     if ( option2 == 0 ) return(0);
01153     else return(Generator(BHEAD term,level));
01154 }
01155 /*
01156 Search for the intermediate functions.
01157 */
01158 t = term + 1;
01159 nvert = 0;
01160 while ( t < tstop && *t != vcode ) t += t[1];
01161 tstart = t;
01162 while ( t < tstop && *t == vcode ) {
01163     t += t[1]; nvert++;
01164 }
01165 tend = t;
01166 /*
01167 Next we copy the relevant content of the various functions into the
01168 Workspace. We keep pointers to the functions in pWorkspace.
01169 First the two endpoints and then the intermediate ones.
01170 */
01171 WantAddPointers((2*nvert+8));
01172 vert = AT.pWorkPointer+2;
01173 vert1 = AT.pWorkPointer;
01174 /* vert2 = AT.pWorkPointer+1; */

```

```

01175     AT.pWorkPointer += 2*nvert+8;
01176     nvert = 0;
01177  /*
01178     Copy the endpoints.
01179  */
01180     to = AT.WorkPointer;
01181
01182     if ( functions[endcode-FUNCTION].spec == TENSORFUNCTION ) {
01183         from = tend1; npass = 0;
01184     redo1:
01185         tos = to++;
01186         tfrom = from+from[1];
01187         from += FUNHEAD;
01188         while ( from < tfrom ) {
01189             if ( option1 == -INDEX && *from >= 0 ) {
01190                 *to++ = *from++;
01191             }
01192             else if ( option1 == -VECTOR && *from < 0 ) {
01193                 *to++ = *from++ - AM.OffsetVector;
01194             }
01195             else {
01196                 from++;
01197             }
01198         }
01199         *tos = to-tos;
01200         if ( *tos < 2 ) to = tos;
01201         else AT.pWorkSpace[vert1+npass] = tos;
01202         npass++;
01203         if ( from == tend2 ) goto redo1;
01204     }
01205     else if ( functions[endcode-FUNCTION].spec == 0 ) {
01206         from = tend1;
01207         npass = 0;
01208     redo2:
01209         tos = to++;
01210         tfrom = from + from[1];
01211         from += FUNHEAD;
01212         while ( from < tfrom ) {
01213             if ( option1 == -VECTOR
01214                 && ( from[0] == -INDEX || from[0] == -VECTOR )
01215                 && from[1] < 0 ) {
01216                 from++;
01217                 *to++ = *from++ - AM.OffsetVector;
01218             }
01219             else if ( option1 == *from ) {
01220                 from++; *to++ = *from++;
01221             }
01222             else {
01223                 NEXTARG(from);
01224             }
01225         }
01226         *tos = to-tos;
01227         if ( *tos < 2 ) to = tos;
01228         else AT.pWorkSpace[vert1+npass] = tos;
01229         npass++;
01230         if ( from == tend2 ) goto redo2;
01231     }
01232     else {
01233         AT.WorkPointer = oldworkpointer;
01234         AT.pWorkPointer = oldpworkpointer;
01235         if ( option2 == 0 ) return(0);
01236         return(Generator(BHEAD term,level));
01237     }
01238  /*
01239     And now the intermediate functions
01240  */
01241     from = tstart;
01242     if ( functions[vcode-FUNCTION].spec == TENSORFUNCTION ) {
01243         from = tstart;
01244         while ( from < tend ) {
01245             tos = to++;
01246             tfrom = from+from[1];
01247             from += FUNHEAD;
01248             while ( from < tfrom ) {
01249                 if ( option1 == -INDEX && *from >= 0 ) {
01250                     *to++ = *from++;
01251                 }
01252                 else if ( option1 == -VECTOR && *from < 0 ) {
01253                     *to++ = *from++ - AM.OffsetVector;
01254                 }
01255                 else {
01256                     from++;
01257                 }
01258             }
01259             *tos = to-tos;
01260             if ( *tos < 3 ) to = tos;
01261             else AT.pWorkSpace[vert+nvert++] = tos;

```



```

01262     }
01263 }
01264 else if ( functions[vcode-FUNCTION].spec == 0 ) {
01265     from = tstart;
01266     while ( from < tend ) {
01267         tos = to++;
01268         tfrom = from + from[1];
01269         from += FUNHEAD;
01270         while ( from < tfrom ) {
01271             if ( option1 == -VECTOR
01272                 && ( from[0] == -INDEX || from[0] == -VECTOR )
01273                 && from[1] < 0 ) {
01274                 from++;
01275                 *to++ = *from++ - AM.OffsetVector;
01276             }
01277             else if ( option1 == *from ) {
01278                 from++; *to++ = *from++;
01279             }
01280             else {
01281                 NEXTARG(from);
01282             }
01283         }
01284         *tos = to-tos;
01285         if ( *tos < 3 ) to = tos;
01286         else AT.pWorkSpace[vert+nvert++] = tos;
01287     }
01288 }
01289 else {
01290     AT.WorkPointer = oldworkpointer;
01291     AT.pWorkPointer = oldpworkpointer;
01292     if ( option2 == 0 ) return(0);
01293     return(Generator(BHEAD term,level));
01294 }
01295 AT.WorkPointer = to;
01296 /*
01297 Now make a list of all relevant arguments.
01298 */
01299 a = arglist = AT.WorkPointer;
01300 for ( i = -2; i < nvert; i++ ) {
01301     v = AT.pWorkSpace[vert+i];
01302     j = *v-1; v++;
01303     NCOPY(a,v,j);
01304 }
01305 nargs = a-arglist;
01306 AT.WorkPointer = a;
01307 /*
01308 Now sort the list. Bubble type sort.
01309 */
01310 a1 = arglist; a2 = a1+1;
01311 while ( a2 < a ) {
01312     a3 = a2;
01313     while ( a3 > a1 && a3[-1] > a3[0] ) {
01314         EXCH(*a3,a3[-1]);
01315         a3--;
01316     }
01317     a2++;
01318 }
01319 /*
01320 Now remove the elements from the list that do not occur exactly twice.
01321 */
01322 a1 = arglist; a2 = a1; a3 = a1+nargs;
01323 while ( a2 < a3 ) {
01324     if ( a2+1 == a3 ) { break; }
01325     else if ( a2+2 == a3 ) {
01326         if ( a2[0] == a2[1] ) { *a1++ = a2[0]; }
01327         break;
01328     }
01329     else {
01330         if ( a2[0] != a2[1] ) { a2++; }
01331         else if ( a2[0] != a2[2] ) {
01332             *a1++ = a2[0]; a2 += 2;
01333         }
01334         else {
01335             a2++; while ( a2 < a3 && a2[-1] == a2[0] ) a2++;
01336         }
01337     }
01338 }
01339 nargs = a1-arglist;
01340 /*
01341 Now we need to redo the list of vertices and remove the elements
01342 that are not in our arglist.
01343 */
01344 do {
01345     action = 0;
01346     for ( i = -2; i < nvert; i++ ) {
01347         vv = v = AT.pWorkSpace[vert+i];
01348         v++;

```

```

01349         for ( j = 1; j < vv[0]; j++ ) {
01350             for ( jj = 0; jj < nargs; jj++ ) {
01351                 if ( *v == arglist[jj] ) break;
01352             }
01353             if ( jj >= nargs ) { /* was not in the list */
01354                 vv[0] = vv[0]-1;
01355                 for ( jj = j; jj < vv[0]; jj++ ) vv[jj] = vv[jj+1];
01356             }
01357             v++;
01358         }
01359     }
01360 /*
01361     Next we need to remove vertices that have only one object remaining.
01362     Also, the object can be removed from arglist. After that we go back
01363     to clean up the list.
01364 */
01365     for ( i = -2; i < nvert; i++ ) {
01366         vv = AT.pWorkSpace[vert+i];
01367         if ( vv[0] == 1 ) {
01368             AT.pWorkSpace[vert+i] = AT.pWorkSpace[vert+nvert-1];
01369             nvert--; i--; continue;
01370         }
01371         else if ( vv[0] == 2 && i >= 0 ) {
01372             for ( j = 0; j < nargs; j++ ) {
01373                 if ( arglist[j] == vv[1] ) break;
01374             }
01375             while ( j < nargs-1 ) arglist[j] = arglist[j+1];
01376             nargs--;
01377             AT.pWorkSpace[vert+i] = AT.pWorkSpace[vert+nvert-1];
01378             nvert--; i--;
01379             action = 1;
01380         }
01381     }
01382     } while ( action );
01383 /*
01384     Now we have a clean list of connections and we can start building
01385     the path. We start with summing over all objects in vert1.
01386 */
01387     path = AT.WorkPointer; npath = 0;
01388     AT.WorkPointer += nvert+8;
01389
01390     t = AT.pWorkSpace[vert1];
01391     if ( *t >= 2 ) {
01392         for ( i = 1; i < *t; i++ ) {
01393             AT.pWorkSpace[vert+nvert] = t;
01394             path[npath++] = t[i];
01395             numgenerated += GenPaths(BHEAD term, level, vert, nvert, arglist, nargs, path, npath);
01396             npath--;
01397         }
01398     }
01399     AT.WorkPointer = oldworkpointer;
01400     AT.pWorkPointer = oldpworkpointer;
01401     if ( numgenerated == 0 && option2 != 0 ) return(Generator(BHEAD term, level));
01402     return(0);
01403 }
01404
01405 /*
01406     #] AllPaths :
01407     #[ GenPaths :
01408
01409     We enter with an open line in path[npath-1]
01410     We traverse though the vertices until we reach vert-1, the endpoint.
01411 */
01412
01413 LONG GenPaths(PHEAD WORD *term, WORD level, LONG vert, WORD nvert,
01414     WORD *arglist, WORD nargs, WORD *path, WORD npath)
01415 {
01416     LONG numgenerated = 0;
01417     WORD *t, *vpartner, *v, *vv;
01418     WORD i, j;
01419 /*
01420     Check whether path[npath-1] is part of the endpoint.
01421 */
01422     t = AT.pWorkSpace[vert-1];
01423     for ( i = 1; i < *t; i++ ) {
01424         if ( t[i] == path[npath-1] ) { /* Got a path! */
01425             PathOutput(BHEAD term, level, path, npath);
01426             numgenerated++;
01427             return(numgenerated);
01428         }
01429     }
01430 /*
01431     Start with finding the partner.
01432 */
01433     for ( i = 0; i < nvert; i++ ) {
01434         vpartner = AT.pWorkSpace[vert+i];
01435         for ( j = 0; j < npath; j++ ) {

```

```

01436         if ( vpartner == AT.pWorkSpace[vert+nvert+j] ) break;
01437     }
01438     if ( j < npath ) continue;
01439     v = vpartner+1; vv = vpartner + *vpartner;
01440     while ( v < vv ) {
01441         if ( *v == path[npath-1] ) {
01442             /*
01443              Found the partner.
01444              Now we can sum over the remaining permitted arguments of this vertex.
01445             */
01446             v = vpartner + 1;
01447             while ( v < vv ) {
01448                 /*
01449                  *v should be in arglist.
01450                 */
01451                 for ( j = 0; j < nargs; j++ ) {
01452                     if ( *v == arglist[j] ) break;
01453                 }
01454                 if ( j >= nargs ) { v++; continue; }
01455             /*
01456              *v should not be in path.
01457             */
01458             for ( j = 0; j < npath; j++ ) {
01459                 if ( *v == path[j] ) break;
01460             }
01461             if ( j >= npath ) {
01462                 AT.pWorkSpace[vert+nvert+npath] = vpartner;
01463                 path[npath++] = *v;
01464                 numgenerated += GenPaths(BHEAD term, level, vert, nvert,
01465                     arglist, nargs, path, npath);
01466                 npath--;
01467             }
01468             v++;
01469         }
01470         return(numgenerated);
01471     }
01472     v++;
01473 }
01474 }
01475 /*
01476 The partner is in a vertex we have finished before.
01477 */
01478 return(numgenerated);
01479 }
01480
01481 /*
01482 #] GenPaths :
01483 #[ PathOutput :
01484 */
01485
01486 void PathOutput(PHEAD WORD *term, WORD level, WORD *path, WORD npath)
01487 {
01488     CBUF *C = cbuf+AM.rbufnum;
01489     WORD pathfun = C->lhs[level][4]; /* The output function */
01490     WORD option1 = C->lhs[level][5]; /* type of argument */
01491     WORD *tstop, *tstop1, *t, *tt;
01492     WORD *outterm;
01493     WORD i;
01494     tstop1 = term+*term; tstop = tstop1 - ABS(tstop1[-1]);
01495     outterm = AT.WorkPointer;
01496     tt = outterm; t = term;
01497     while ( t < tstop ) *tt++ = *t++;
01498     *tt++ = pathfun;
01499     if ( functions[pathfun-FUNCTION].spec == TENSORFUNCTION ) {
01500         *tt++ = FUNHEAD+npath;
01501         FILLFUN(tt)
01502         if ( option1 == -VECTOR ) {
01503             for ( i = 0; i < npath; i++ ) *tt++ = path[i]+AM.OffsetVector;
01504         }
01505         else {
01506             for ( i = 0; i < npath; i++ ) *tt++ = path[i];
01507         }
01508     }
01509     else {
01510         *tt++ = FUNHEAD+npath*2;
01511         FILLFUN(tt)
01512         for ( i = 0; i < npath; i++ ) {
01513             *tt++ = option1;
01514             if ( option1 == -VECTOR ) *tt++ = path[i] + AM.OffsetVector;
01515             else *tt++ = path[i];
01516         }
01517     }
01518     while ( t < tstop1 ) *tt++ = *t++;
01519     *outterm = tt - outterm;
01520     AT.WorkPointer = tt;
01521     if ( Generator(BHEAD outterm, level) ) {
01522         MesCall("PathOutput");

```

```

01523         Terminate(-1);
01524     }
01525     AT.WorkPointer = outterm;
01526 }
01527
01528
01529
01530 /*
01531 #] PathOutput :
01532 #[ AllOnePI :
01533
01534 We assume a graph that has loops and is OnePI.
01535 This routine initializes the recursion that creates all onePI subgraphs.
01536
01537 Algorithm:
01538     a: have a routine that removes all bridges: RemoveBridges
01539     b: output an empty diagram.
01540     c: output the diagram itself
01541     d: cut a line, followed by removing all bridges.
01542     e: if the diagram still has lines, go to c, else go to the next line in d.
01543 In order to avoid factorial blowup, we need to prune the tree as fast as possible.
01544
01545 1: list of lines to be cut.
01546 2: once we have tried a line and removed its bridges, we do not have to
01547    try this line deeper in the tree, neither its bridges.
01548
01549
01550 1 2 3
01551     cut 1.                x
01552         cut 2 -> bridge 3    x
01553     cut 2.                x
01554         cut 3 -> bridge 1    ??? mag niet
01555     cut 3.                x
01556 Hence 1,2,3,4,5,6,7
01557     1 still to go 2,3,4,5,6,7
01558     2 still to go 3,4,5,6,7
01559     3 still to go 4,5,6,7
01560     etc.
01561 bridges: if x is bridge, we take x from the list_to_go.
01562 If we have a bridge that is a number lower than the list_to_go we skip this possibility.
01563 We reach the end when the list_to_go is empty.
01564 */
01565
01566 WORD AllOnePI(WORD *term,WORD level)
01567 {
01568     CBUF *C = cbuf+AM.rbufnum;
01569     WORD vcode = C->lhs[level][2];    /* The vertex function */
01570     WORD option1 = C->lhs[level][4];    /* type of argument */
01571 /*
01572     First we have to collect all relevant information about the diagram.
01573     We should start with removing bridges to make the real starting point onePI.
01574 */
01575     DUMMYUSE(term)
01576     DUMMYUSE(vcode)
01577     DUMMYUSE(option1)
01578     return(0);
01579 }
01580
01581 /*
01582 #] AllOnePI :
01583 #[ RemoveBridges :
01584 */
01585
01586 int RemoveBridges(void)
01587 {
01588     return(0);
01589 }
01590
01591 /*
01592 #] RemoveBridges :
01593 #[ TakeOneLine :
01594 */
01595
01596 int TakeOneLine(WORD*term,WORD level)
01597 {
01598     DUMMYUSE(term)
01599     DUMMYUSE(level)
01600     return(0);
01601 }
01602
01603 /*
01604 #] TakeOneLine :
01605 #[ OutputOnePI :
01606 */
01607
01608 int OutputOnePI(PHEAD WORD *term,WORD level)
01609 {

```

```

01610     return(Generator(BHEAD term,level));
01611 }
01612
01613 /*
01614  #] OutputOnePI :
01615 */
01616

```

4.70 mallocprotect.h

```

00001 #ifndef MALLOCPROTECT_H
00002 #define MALLOCPROTECT_H
00003
00010 /* #] License : */
00011 /*
00012  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00013  * When using this file you are requested to refer to the publication
00014  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00015  * This is considered a matter of courtesy as the development was paid
00016  * for by FOM the Dutch physics granting agency and we would like to
00017  * be able to track its scientific use to convince FOM of its value
00018  * for the community.
00019  *
00020  * This file is part of FORM.
00021  *
00022  * FORM is free software: you can redistribute it and/or modify it under the
00023  * terms of the GNU General Public License as published by the Free Software
00024  * Foundation, either version 3 of the License, or (at your option) any later
00025  * version.
00026  *
00027  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00028  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00029  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00030  * details.
00031  *
00032  * You should have received a copy of the GNU General Public License along
00033  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00034 */
00035 /* #] License : */
00036
00037 /*
00038  #] Documentation :
00039
00040 The enhanced malloc debugger. It intercepts access (both write AND
00041 read) to the memory outside the allocated chunk in the following
00042 manner: it prints out (to the stderr) the information about the event
00043 and goes to the spillock. The user is able to attach the debugger to
00044 the running process, investigate the problem and continue evaluation.
00045
00046 In case of error, the debugger will print to the stderr the following
00047 information:
00048 "***** PID: ###, Addr: ###, signal ### (code ###)"
00049 "Attach gdb -p ### and set var loopForever=0 in a corresponding frame to continue"
00050 or for TFORM:
00051 "Attach gdb -p ### and set var loopForever=0 in a corresponding frame
00052   of a thread with LPW id ### to continue"
00053
00054 and go to the spillock. The user may attach gdb by the command
00055 gdb -p ### and type "where" (in case of TFORM, the user should first
00056 switch to the proper thread). Then investigation of the corresponding
00057 frames should clarify the situation. In order to continue the program,
00058 the user might set (in the corresponding frame of the corresponding
00059 thread) the variable loopForever to 0. The debugger will try to remove
00060 local problem lead to the exception.
00061
00062 To activate the debugger, the macro MALLOCPROTECT should be
00063 defined. There are three possible values:
00064 #define MALLOCPROTECT -1 (any integer <0)
00065 #define MALLOCPROTECT 0
00066 #define MALLOCPROTECT 1 (any integer>0)
00067
00068 If MALLOCPROTECT < 0, the debugger will intercept any access to the
00069 memory before the allocated chunk, even one byte.
00070
00071 If MALLOCPROTECT == 0, the debugger will intercept any access to the
00072 memory before the allocated chunk, even one byte, and access to the
00073 memory page next to the allocated one.
00074
00075 If MALLOCPROTECT > 0, the debugger will intercept any access to the
00076 memory after the allocated chunk, even one byte, and access to the
00077 memory page before the allocated one.
00078
00079 The original FORM malloc debugger is able to catch errors when the

```

```

00080 allocated memory is freed improper, or if some small portion OUT of
00081 the allocated chunk is written. This debugger is a complementary
00082 one. It permits to catch situation when some small portion of memory
00083 before or after the allocated chunk is written or even just read.
00084
00085 The idea is to protect the beginning or the end of the allocated chunk
00086 for any kind of access and install the SIGSEGV handler in order to
00087 intercept the access to this memory. Moreover, the allocated memory is
00088 always immediately returned to the system so if the user tries to
00089 access the memory after it is freed then the handler is triggered,
00090 also.
00091
00092 The problem here is that we are able to allocate / protect only the
00093 whole page. So the user has to run the debugger twice: one time with
00094 the left alignment (#define MALLOC_PROTECT <0), and then with the right
00095 alignment (#define MALLOC_PROTECT >0). During the first run the possible
00096 errors like x[-1] will be caught, and the second run will manifest
00097 reading over the allocated ares.
00098
00099 The leftmost extra page is always allocated and protected. The size
00100 of the allocated chunk is stored in the beginning of this page.
00101
00102     #] Documentation :
00103     #[ Includes :
00104 */
00105
00106 #include <stdio.h>
00107 #include <stdlib.h>
00108 #include <unistd.h>
00109 #include <signal.h>
00110 #include <sys/mman.h>
00111
00112 #ifdef WITHPTHREADS
00113 #ifdef LINUX
00114 #include <sys/syscall.h>
00115 #endif
00116 #endif
00117
00118 /*
00119     #] Includes :
00120 */
00121
00122 static int pageSize=4096; /*the default value*/
00123
00124
00125 /*
00126     #[ segv_handler :
00127 */
00128
00129 /*The handler will be invoked on some signal (usually SIGSEGV). It
00130 will print some diagnostics to stderr and hands up in infinite loop
00131 waiting the user for debugging:*/
00132 static void segv_handler(int sig, siginfo_t *sip, void *xxx) {
00133     char *vadr;
00134     char *errStr;
00135     int actionBeforeExit=0; /* < 0 - unprotect, > 0 - map */
00136     switch(sip->si_signo) { /* All POSIX signals for which the field siginfo_t.si_addr is defined:*/
00137         case SIGILL:
00138             switch(sip->si_code) {
00139                 case ILL_ILLOPC:
00140                     errStr="SIGILL: Illegal opcode";
00141                     break;
00142                 case ILL_ILLOPN:
00143                     errStr="SIGILL: Illegal operand";
00144                     break;
00145                 case ILL_ILLADR:
00146                     errStr="SIGILL: Illegal addressing mode";
00147                     break;
00148                 case ILL_ILLTRP:
00149                     errStr="SIGILL: Illegal trap";
00150                     break;
00151                 case ILL_PRVOPC:
00152                     errStr="SIGILL: Privileged opcode";
00153                     break;
00154                 case ILL_PRVREG:
00155                     errStr="SIGILL: Privileged register";
00156                     break;
00157                 case ILL_COPROC:
00158                     errStr="SIGILL: Coprocessor error";
00159                     break;
00160                 case ILL_BADSTK:
00161                     errStr="SIGILL: Internal stack error";
00162                     break;
00163                 default:
00164                     errStr="SIGILL: Unknown signal code";
00165             } /*case SIGILL:*/
00166             break;

```

```

00167         case SIGFPE:
00168             switch(sip->si_code){
00169                 case FPE_INTDIV:
00170                     errStr="SIGFPE: Integer divide-by-zero";
00171                     break;
00172                 case FPE_INTOVF:
00173                     errStr="SIGFPE: Integer overflow";
00174                     break;
00175                 case FPE_FLTDIV:
00176                     errStr="SIGFPE: Floating point divide-by-zero";
00177                     break;
00178                 case FPE_FLTOVF:
00179                     errStr="SIGFPE: Floating point overflow";
00180                     break;
00181                 case FPE_FLTUND:
00182                     errStr="SIGFPE: Floating point underflow";
00183                     break;
00184                 case FPE_FLTRES:
00185                     errStr="SIGFPE: Floating point inexact result";
00186                     break;
00187                 case FPE_FLTINV:
00188                     errStr="SIGFPE: Invalid floating point operation";
00189                     break;
00190                 case FPE_FLTSUB:
00191                     errStr="SIGFPE: Subscript out of range";
00192                     break;
00193                 default:
00194                     errStr="SIGFPE: Unknown signal code";
00195             }/*switch(sip->si_code)*/
00196             break;
00197         case SIGSEGV:
00198             switch(sip->si_code){
00199                 case SEGV_MAPERR:
00200                     errStr="SIGSEGV: Address not mapped";
00201                     actionBeforeExit = 1;
00202                     break;
00203                 case SEGV_ACCERR:
00204                     errStr="SIGSEGV: Invalid permissions";
00205                     actionBeforeExit = -1;
00206                     break;
00207                 default:
00208                     errStr="SIGSEGV: Unknown signal code";
00209             }/*switch(sip->si_code)*/
00210             break;
00211         case SIGBUS:
00212             switch(sip->si_code){
00213                 case BUS_ADRALN:
00214                     errStr="SIGBUS: Invalid address alignment";
00215                     break;
00216                 case BUS_ADRERR:
00217                     errStr="SIGBUS: Non-existent physical address";
00218                     break;
00219                 case BUS_OBJERR:
00220                     errStr="SIGBUS: Object-specific hardware error";
00221                     break;
00222                 default:
00223                     errStr="SIGBUS: Unknown signal code";
00224             }/*switch(sip->si_code)*/
00225             break;
00226         default:
00227             errStr="Unknown signal";
00228     }/*switch(sip->si_signo)*/
00229
00230     vadr = (caddr_t)sip->si_addr;
00231     fprintf(stderr, "\n***** PID: %ld, Addr: %p, signal %s (code %d)\n",
00232         (long)getpid(), vadr, errStr, sip->si_code);
00233
00234     /*Block*/
00235     /*The process hangs up at this block.
00236     Attach gdb to investigate and continue:
00237     */
00238     volatile int loopForever=1;
00239     size_t alignedAdr=((size_t)vadr) & (~ (pageSize-1));
00240     fprintf(stderr, "    Attach gdb -p %ld and set var loopForever=0 in a corresponding frame",
00241         (long)getpid());
00242     #ifdef CORRECTCODE
00243     #ifdef WITHPTHREADS
00244     #ifdef LINUX
00245         fprintf(stderr, "\n    of a thread with LPW id %ld", (long)syscall(SYS_gettid));
00246     #else
00247         /*If the compiler fails here, just remove the next line:*/
00248         fprintf(stderr, "\n    of thread with LPW id %ld", (long)gettid());
00249     #endif
00250     #endif
00251     #endif
00252     fprintf(stderr, " to continue\n");
00253

```

```

00254
00255     while(loopForever)
00256         sleep(1);
00257
00258     if(actionBeforeExit<0)/*After changing loopForever=0, unprotect the page to continue:*/
00259         mprotect((char*)alignedAdr, pageSize, PROT_READ | PROT_WRITE);
00260     if(actionBeforeExit>0)/*After changing loopForever=0, map the page to continue:*/
00261 /*         mmap((void*)alignedAdr,pageSize,PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, 0, 0); */
00262         mmap((void*)alignedAdr,pageSize,PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANON, 0, 0);
00263     }/*Block*/
00264 }/*segv_handler*/
00265
00266 /*
00267 #] segv_handler :
00268 */
00269
00270 /*
00271 #[ mprotectInit :
00272 */
00273
00274 static FORM_INLINE int mprotectInit(void)
00275 {
00276     struct sigaction sa;
00277     pageSize = getpagesize();
00278     sa.sa_sigaction = &segv_handler;
00279
00280     sigemptyset(&sa.sa_mask);
00281     sigaddset(&sa.sa_mask, SIGIO);
00282     sigaddset(&sa.sa_mask, SIGALRM);
00283
00284     sa.sa_flags = SA_SIGINFO;
00285
00286     if (sigaction(SIGILL, &sa, NULL)) {
00287         fprintf(stderr,"Error on assigning %s.\n","SIGILL");
00288         return SIGILL;
00289     }
00290     if (sigaction(SIGFPE, &sa, NULL)) {
00291         fprintf(stderr,"Error on assigning %s.\n","SIGFPE");
00292         return SIGFPE;
00293     }
00294     if (sigaction(SIGSEGV, &sa, NULL)) {
00295         fprintf(stderr,"Error on assigning %s.\n","SIGSEGV");
00296         return SIGSEGV;
00297     }
00298     if (sigaction(SIGBUS, &sa, NULL)) {
00299         fprintf(stderr,"Error on assigning %s.\n","SIGBUS");
00300         return SIGBUS;
00301     }
00302     return 0;
00303 }/*mprotectInit*/
00304
00305 /*
00306 #] mprotectInit :
00307 */
00308
00309 /*
00310 #[ mprotectMalloc :
00311 */
00312
00313 static void *mprotectMalloc(size_t theSize)
00314 {
00315     #if MALLOC_PROTECT < 0
00316         /*Only one side is protected*/
00317         size_t nPages=1;
00318     #else
00319         /*Both sides are protected*/
00320         size_t nPages=2;
00321     #if MALLOC_PROTECT > 0
00322         /*will need the original theSize*/
00323         size_t requestedSize=theSize;
00324     #endif
00325     #endif
00326
00327     char *ret=NULL;
00328     size_t *ptr;
00329
00330
00331
00332
00333     /*Align required size to the pagesize:*/
00334     if(theSize % pageSize)
00335         nPages++;
00336     theSize= (theSize/pageSize+nPages)*pageSize;
00337
00338 /*     ret=(char*)mmap(0,theSize,PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, 0, 0); */
00339     ret=(char*)mmap(0,theSize,PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANON, 0, 0);
00340     if(ret == MAP_FAILED)

```



```


00341     return NULL;
00342     ptr=(size_t *)ret;
00343     *ptr=theSize;
00344     if(mprotect(ret, pageSize, PROT_NONE))return NULL;
00345     #if MALLOCPROTECT < 0
00346     return ret+pageSize;
00347     #else
00348     if(mprotect(ret+(theSize-pageSize), pageSize, PROT_NONE))return NULL;
00349     #if MALLOCPROTECT ==0
00350     return ret+pageSize;
00351     #endif
00352     #endif
00353     /*MALLOCPROTECT > 0, but we need conditional compilation
00354     since the variable requestedSize:*/
00355     #if MALLOCPROTECT > 0
00356
00357     /*Potential problems with alignment if the requested size is not
00358     a multiple of items. But no problems on x86-64:*/
00359     return ret+ (theSize-pageSize-requestedSize);
00360     #endif
00361 }/*mprotectMalloc*/
00362 /*
00363  #] mprotectMalloc :
00364  */
00365 /*
00366  #[ mprotectFree :
00367  */
00368 */
00369 static void mprotectFree(char *ptr)
00370 {
00371     size_t theSize;
00372     if(ptr==NULL) return;
00373     #if MALLOCPROTECT > 0
00374     /*The memory block was moved to the right, find the left page boundary:*/
00375     { /*Block*/
00376         size_t alignedPtr=((size_t)ptr) & ~(pageSize-1);
00377         ptr=(char*)alignedPtr;
00378     } /*Block*/
00379     #endif
00380     #endif
00381     ptr-=pageSize;
00382     mprotect(ptr, pageSize, PROT_READ);
00383     theSize=((size_t*)ptr);
00384     munmap(ptr,theSize);
00385 }/*mprotectFree*/
00386 /*
00387  #] mprotectFree :
00388  */
00389 */
00390 */
00391 */
00392 #endif

```

4.71 message.c File Reference

#include "form3.h"

Include dependency graph for message.c:

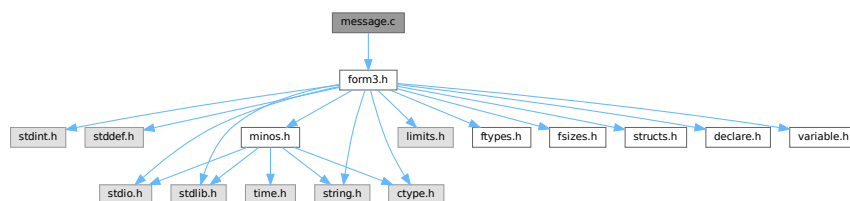

Functions

- void [Error0](#) (char *s)

- void [Error1](#) (char *s, UBYTE *t)
- void [Error2](#) (char *s1, char *s2, UBYTE *t)
- int [MesWork](#) (void)
- int [MesPrint](#) (va_alist)
- void [Warning](#) (char *s)
- void [HighWarning](#) (char *s)
- int [MesCall](#) (char *s)
- int [MesCerr](#) (char *s, UBYTE *t)
- int [MesComp](#) (char *s, UBYTE *p, UBYTE *q)
- void [PrintTerm](#) (WORD *term, char *where)
- void [PrintTermC](#) (WORD *term, char *where)
- void [PrintSubTerm](#) (WORD *term, char *where)
- void [PrintWords](#) (WORD *buffer, LONG number)
- void [PrintSeq](#) (WORD *a, char *text)

4.71.1 Detailed Description

Contains the routines that write messages. This includes the very important routine MesPrint which is the FORM equivalent of printf but then with escape sequences that are relevant for symbolic manipulation. The FORM statement Print "..." is passed almost literally to MesPrint.

Definition in file [message.c](#).

4.71.2 Function Documentation

4.71.2.1 Error0()

```
void Error0 (  
    char * s )
```

Definition at line 56 of file [message.c](#).

4.71.2.2 Error1()

```
void Error1 (  
    char * s,  
    UBYTE * t )
```

Definition at line 67 of file [message.c](#).

4.71.2.3 Error2()

```
void Error2 (  
    char * s1,  
    char * s2,  
    UBYTE * t )
```

Definition at line 78 of file [message.c](#).

4.71.2.4 MesWork()

```
int MesWork (
    void )
```

Definition at line 89 of file [message.c](#).

4.71.2.5 MesPrint()

```
int MesPrint (
    va_alist )
```

Definition at line 140 of file [message.c](#).

4.71.2.6 Warning()

```
void Warning (
    char * s )
```

Definition at line 790 of file [message.c](#).

4.71.2.7 HighWarning()

```
void HighWarning (
    char * s )
```

Definition at line 802 of file [message.c](#).

4.71.2.8 MesCall()

```
int MesCall (
    char * s )
```

Definition at line 814 of file [message.c](#).

4.71.2.9 MesCerr()

```
int MesCerr (
    char * s,
    UBYTE * t )
```

Definition at line 824 of file [message.c](#).

4.71.2.10 MesComp()

```
int MesComp (
    char * s,
    UBYTE * p,
    UBYTE * q )
```

Definition at line 843 of file [message.c](#).

4.71.2.11 PrintTerm()

```
void PrintTerm (
    WORD * term,
    char * where )
```

Definition at line [857](#) of file [message.c](#).

4.71.2.12 PrintTermC()

```
void PrintTermC (
    WORD * term,
    char * where )
```

Definition at line [887](#) of file [message.c](#).

4.71.2.13 PrintSubTerm()

```
void PrintSubTerm (
    WORD * term,
    char * where )
```

Definition at line [921](#) of file [message.c](#).

4.71.2.14 PrintWords()

```
void PrintWords (
    WORD * buffer,
    LONG number )
```

Definition at line [943](#) of file [message.c](#).

4.71.2.15 PrintSeq()

```
void PrintSeq (
    WORD * a,
    char * text )
```

Definition at line [961](#) of file [message.c](#).

4.72 message.c

[Go to the documentation of this file.](#)

```

00001
00009 /* #[ License : */
00010 /*
00011 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 *   When using this file you are requested to refer to the publication
00013 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 *   This is considered a matter of courtesy as the development was paid
00015 *   for by FOM the Dutch physics granting agency and we would like to
00016 *   be able to track its scientific use to convince FOM of its value
00017 *   for the community.
00018 *
00019 *   This file is part of FORM.
00020 *
00021 *   FORM is free software: you can redistribute it and/or modify it under the
00022 *   terms of the GNU General Public License as published by the Free Software
00023 *   Foundation, either version 3 of the License, or (at your option) any later
00024 *   version.
00025 *
00026 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 *   details.
00030 *
00031 *   You should have received a copy of the GNU General Public License along
00032 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #[ License : */
00035 /*
00036 *   #[ Includes :
00037 *
00038 *   The static variables for the messages can remain as such also for
00039 *   the parallel version as messages are to be locked to avoid problems
00040 *   with simultaneous messages.
00041 */
00042
00043 #include "form3.h"
00044
00045 static int iswarning = 0;
00046
00047 static char hex[] = {'0','1','2','3','4','5','6','7','8','9',
00048                     'A','B','C','D','E','F'};
00049
00050 /*
00051 *   #[ Includes :
00052 *   #[ exit :
00053 *   #[ Error0 :
00054 */
00055
00056 void Error0(char *s)
00057 {
00058     MesPrint("=== %s",s);
00059     Terminate(-1);
00060 }
00061
00062 /*
00063 *   #[ Error0 :
00064 *   #[ Error1 :
00065 */
00066
00067 void Error1(char *s, UBYTE *t)
00068 {
00069     MesPrint("@%s %s",s,t);
00070     Terminate(-1);
00071 }
00072
00073 /*
00074 *   #[ Error1 :
00075 *   #[ Error2 :
00076 */
00077
00078 void Error2(char *s1, char *s2, UBYTE *t)
00079 {
00080     MesPrint("@%s%s %s",s1,s2,t);
00081     Terminate(-1);
00082 }
00083
00084 /*
00085 *   #[ Error2 :
00086 *   #[ MesWork :
00087 */
00088
00089 int MesWork(void)

```

```

00090 {
00091     MesPrint("=== Workspace overflow. %l bytes is not enough.",AM.WorkSize);
00092     MesPrint("=== Change parameter WorkSpace in %s",setupfilename);
00093     Terminate(-1);
00094     return(-1);
00095 }
00096
00097 /*
00098     #] MesWork :
00099     #[ MesPrint :
00100
00101     Kind of a printf function for simple messages.
00102     The main concern is getting the arguments in a portable way.
00103     Note: many compilers have errors when sizeof(WORD) < sizeof(int)
00104     %a array of size n WORDs (two parameters, first is int, second WORD *)
00105     %b array of size n UBYTES (two parameters, first is int, second UBYTE *)
00106     %C array of size n chars (two parameters, first is int, second char *)
00107     %d word;
00108     %l long;
00109     %L long long *;
00110     %s string;
00111     %#i unsigned word filled
00112     %#d word positioned
00113     %#l long word positioned.
00114     %#L long long word * positioned.
00115     %#s string positioned.
00116     %#p position in file.
00117     %r The current term in raw format (internal representation)
00118     %t The current term (AN.currentTerm)
00119     %T The current term (AN.currentTerm) with its sign
00120     %w Number of the thread(worker)
00121     %$ The next $ in AN.listinprint
00122     %x hexadecimal. Takes 8 places. Mainly for debugging.
00123     %% %
00124     %# #
00125     # " ==> "
00126     @ " ==> " Preprocessor error
00127     & ' --> ' Regular compiler error
00128     Each call is terminated with a new line.
00129     Put a % at the end of the string to suppress the new line.
00130
00131     New feature (7-dec-2011): The & will only work when we do not block it
00132     from the execution of the print statement because we need the & also for
00133     the tabulator in the print "" statement.
00134 */
00135
00136 int
00137 #ifdef ANSI
00138 MesPrint(const char *fmt, ... )
00139 #else
00140 MesPrint(va_alist)
00141 va_dcl
00142 #endif
00143 {
00144     GETIDENTITY
00145     char Out[MAXLINELENGTH+14], *stopper, *t, *s, *u, c, *carray;
00146     UBYTE extrabuffer[MAXLINELENGTH+14];
00147     int w, x, i, specialerror = 0;
00148     LONG num, y;
00149     WORD *array;
00150     UBYTE *oldoutfill = AO.OutputLine, *barray;
00151     /*[19apr2004 mt]:*/
00152     LONG (*OldWrite)(int handle, UBYTE *buffer, LONG size) = WriteFile;
00153     /*:[19apr2004 mt]*/
00154     va_list ap;
00155     #ifdef ANSI
00156         va_start(ap,fmt);
00157         s = (char *)fmt;
00158     #else
00159         va_start(ap);
00160         s = va_arg(ap,char *);
00161     #endif
00162     #ifdef WITHMPI
00163         /*
00164          * On slaves, if AS.printflag is
00165          * = 0 : print nothing.
00166          * > 0 : synchronized output. All text will be sent to the master
00167          * in the next MUNLOCK().
00168          * < 0 : normal output.
00169          */
00170         if ( PF.me != MASTER && AS.printflag == 0 ) return(0);
00171         if ( PF.me == MASTER || AS.printflag < 0 )
00172     #endif
00173         FLUSHCONSOLE;
00174         /*
00175          * MesPrints() never prints a message to an external channel even if
00176          * WriteFile is set to &WriteToExternalChannel.

```

```

00177      */
00178 #ifdef WITHMPI
00179     WriteFile = PF.me == MASTER || AS.printflag > 0 ? &PF_WriteFileToFile : &WriteFileToFile;
00180 #else
00181     WriteFile = &WriteFileToFile;
00182 #endif
00183     AO.OutputLine = extrabuffer;
00184     t = Out;
00185     stopper = Out + AC.LineLength;
00186     while ( *s ) {
00187         if ( ( ( *s == '&' && AO.ErrorBlock == 0 ) || *s == '@' || *s == '#' ) && AC.CurrentStream !=
00188 0 ) {
00189             u = (char *)AC.CurrentStream->name;
00190             while ( *u ) {
00191                 *t++ = *u++;
00192                 if ( t >= stopper ) {
00193                     num = t - Out;
00194                     WriteString(ERROROUT, (UBYTE *)Out, num);
00195                     num = 0; t = Out;
00196                 }
00197                 *t++ = ' ';
00198                 if ( t+20 >= stopper ) {
00199                     num = t - Out;
00200                     WriteString(ERROROUT, (UBYTE *)Out, num);
00201                     num = 0; t = Out;
00202                 }
00203                 *t++ = 'L'; *t++ = 'i'; *t++ = 'n'; *t++ = 'e'; *t++ = ' ';
00204                 if ( *s == '&' ) y = AC.CurrentStream->prevline;
00205                 else y = AC.CurrentStream->linenumber;
00206                 t = LongCopy(y, t);
00207                 if ( !iswarning && ( *s == '&' || *s == '@' ) ) {
00208                     for ( i = 0; i < NumDoLoops; i++ ) DoLoops[i].errorsinloop = 1;
00209                 }
00210             }
00211             if ( ( *s == '&' && AO.ErrorBlock == 0 ) ) {
00212                 *t++ = ' '; *t++ = '-'; *t++ = '-'; *t++ = '>'; *t++ = ' '; s++;
00213             }
00214             else if ( *s == '@' || *s == '#' ) {
00215                 *t++ = ' '; *t++ = '='; *t++ = '='; *t++ = '>'; *t++ = ' '; s++;
00216             }
00217             /*
00218             else if ( *s == '&' && AO.ErrorBlock == 1 ) {
00219             }
00220             */
00221             /*
00222             else if ( *s != '%' ) {
00223                 *t++ = *s++;
00224                 if ( t >= stopper ) {
00225                     num = t - Out;
00226                     WriteString(ERROROUT, (UBYTE *)Out, num);
00227                     num = 0; t = Out;
00228                 }
00229             }
00230             else {
00231                 s++;
00232                 if ( *s == 'd' ) {
00233                     if ( ( w = va_arg(ap, int) ) < 0 ) { *t++ = '-'; w = -w; }
00234                     t = (char *)NumCopy(w, (UBYTE *)t);
00235                 }
00236                 else if ( *s == 'l' ) {
00237                     if ( ( y = va_arg(ap, LONG) ) < 0 ) { *t++ = '-'; y = -y; }
00238                     t = LongCopy(y, t);
00239                 }
00240             /* #ifdef __GLIBC_HAVE_LONG_LONG */
00241             else if ( *s == 'p' ) {
00242                 POSITION *pp;
00243                 off_t ly;
00244                 pp = va_arg(ap, POSITION *);
00245                 ly = BASEPOSITION(*pp);
00246                 if ( ly < 0 ) { *t++ = '-'; ly = -ly; }
00247             /*----change 10-feb-2003 did not have & */
00248                 t = LongLongCopy(&(ly), t);
00249             }
00250             /* #endif */
00251             else if ( *s == 'c' ) {
00252                 c = (char)(va_arg(ap, int));
00253                 *t++ = c; *t = 0;
00254             }
00255             else if ( *s == 'a' ) {
00256                 w = va_arg(ap, int);
00257                 array = va_arg(ap, WORD *);
00258                 while ( w > 0 ) {
00259                     t = (char *)NumCopy(*array, (UBYTE *)t);
00260                     if ( t >= stopper ) {
00261                         num = t - Out;
00262                         WriteString(ERROROUT, (UBYTE *)Out, num);

```

```

00263         t = Out;
00264         *t++ = ' ';
00265     }
00266     *t++ = ' ';
00267     w--; array++;
00268 }
00269 }
00270 else if ( *s == 'b' ) {
00271     w = va_arg(ap, int);
00272     barray = va_arg(ap, UBYTE *);
00273     while ( w > 0 ) {
00274         *t++ = hex[ ((*barray) >> 4) & 0xF ];
00275         *t++ = hex[ (*barray) & 0xF ];
00276         *t = 0;
00277         if ( t >= stopper ) {
00278             num = t - Out;
00279             WriteString(ERROROUT, (UBYTE *)Out, num);
00280             t = Out;
00281             *t++ = ' ';
00282         }
00283         *t++ = ' ';
00284         w--; barray++;
00285     }
00286 }
00287 else if ( *s == 'C' ) {
00288     w = va_arg(ap, int);
00289     carray = va_arg(ap, char *);
00290     while ( w > 0 ) {
00291         if ( *carray < 32 ) *t++ = '^';
00292         else *t++ = *carray;
00293         *t = 0;
00294         if ( t >= stopper ) {
00295             num = t - Out;
00296             WriteString(ERROROUT, (UBYTE *)Out, num);
00297             t = Out;
00298             *t++ = ' ';
00299         }
00300         w--; carray++;
00301     }
00302 }
00303 else if ( *s == 'I' ) {
00304     int *iarray;
00305     w = va_arg(ap, int);
00306     iarray = va_arg(ap, int *);
00307     while ( w > 0 ) {
00308         t = (char *)LongCopy((LONG)(*iarray), (char *)t);
00309         if ( t >= stopper ) {
00310             num = t - Out;
00311             WriteString(ERROROUT, (UBYTE *)Out, num);
00312             t = Out;
00313             *t++ = ' ';
00314         }
00315         *t++ = ' ';
00316         w--; array++;
00317     }
00318 }
00319 else if ( *s == 'E' ) {
00320     LONG *larray;
00321     w = va_arg(ap, int);
00322     larray = va_arg(ap, LONG *);
00323     while ( w > 0 ) {
00324         t = (char *)LongCopy(*larray, (char *)t);
00325         if ( t >= stopper ) {
00326             num = t - Out;
00327             WriteString(ERROROUT, (UBYTE *)Out, num);
00328             t = Out;
00329             *t++ = ' ';
00330         }
00331         *t++ = ' ';
00332         w--; array++;
00333     }
00334 }
00335 else if ( *s == 's' ) {
00336     u = va_arg(ap, char *);
00337     while ( *u ) {
00338         if ( t >= stopper ) {
00339             num = t - Out;
00340             WriteString(ERROROUT, (UBYTE *)Out, num);
00341             t = Out;
00342         }
00343         *t++ = *u++;
00344     }
00345     *t = 0;
00346 }
00347 else if ( *s == 't' || *s == 'T' ) {
00348     WORD oldskip = AO.OutSkip, noleadsign;
00349     WORD oldmode = AC.OutputMode;

```



```

00350         WORD oldbracket = AO.IsBracket;
00351         WORD oldlength = AC.LineLength;
00352         UBYTE *oldStop = AO.OutStop;
00353         if ( AN.currentTerm ) {
00354             if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00355             AO.IsBracket = 0;
00356             AO.OutSkip = 1;
00357             AC.OutputMode = 0;
00358             AO.OutFill = AO.OutputLine;
00359             AO.OutStop = AO.OutputLine + AC.LineLength;
00360             *t = 0;
00361             AddToLine( (UBYTE *)Out);
00362             if ( *s == 'T' ) noleadsign = 1;
00363             else noleadsign = 0;
00364             if ( WriteInnerTerm(AN.currentTerm,noleadsign) ) Terminate(-1);
00365             t = Out;
00366             u = (char *)AO.OutputLine;
00367             *(AO.OutFill) = 0;
00368             while ( u < (char *) (AO.OutFill) ) *t++ = *u++;
00369             *t = 0;
00370             AO.OutSkip = oldskip;
00371             AC.OutputMode = oldmode;
00372             AO.IsBracket = oldbracket;
00373             AC.LineLength = oldlength;
00374             AO.OutStop = oldStop;
00375         }
00376     }
00377     else if ( *s == 'r' ) {
00378         WORD oldskip = AO.OutSkip;
00379         WORD oldmode = AC.OutputMode;
00380         WORD oldbracket = AO.IsBracket;
00381         WORD oldlength = AC.LineLength;
00382         UBYTE *oldStop = AO.OutStop;
00383         if ( AN.currentTerm ) {
00384             WORD *tt = AN.currentTerm;
00385             if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00386             AO.IsBracket = 0;
00387             AO.OutSkip = 1;
00388             AC.OutputMode = 0;
00389             AO.OutFill = AO.OutputLine;
00390             AO.OutStop = AO.OutputLine + AC.LineLength;
00391             *t = 0;
00392             i = *tt;
00393             while ( --i >= 0 ) {
00394                 t = (char *)NumCopy(*tt, (UBYTE *)t);
00395                 tt++;
00396                 if ( t >= stopper ) {
00397                     num = t - Out;
00398                     WriteString(ERROROUT, (UBYTE *)Out, num);
00399                     num = 0; t = Out;
00400                 }
00401                 *t++ = ' '; *t++ = ' ';
00402             }
00403             *t = 0;
00404             AO.OutSkip = oldskip;
00405             AC.OutputMode = oldmode;
00406             AO.IsBracket = oldbracket;
00407             AC.LineLength = oldlength;
00408             AO.OutStop = oldStop;
00409         }
00410     }
00411     else if ( *s == '$' ) {
00412         /*
00413         #[ dollars :
00414         */
00415         WORD oldskip = AO.OutSkip;
00416         WORD oldmode = AC.OutputMode;
00417         WORD oldbracket = AO.IsBracket;
00418         WORD oldlength = AC.LineLength;
00419         UBYTE *oldStop = AO.OutStop;
00420         WORD *term, indsubterm[3], *tt;
00421         WORD value[5], first, num;
00422         if ( *AN.listinprint != DOLLAREXPRESSION ) {
00423             specialerror = 1;
00424         }
00425         else {
00426             DOLLARS d = Dollars + AN.listinprint[1];
00427             #ifdef WITHPTHREADS
00428             int nummodopt, dtype;
00429             dtype = -1;
00430             if ( AS.MultiThreaded ) {
00431                 for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00432                     if ( AN.listinprint[1] == ModOptdollars[nummodopt].number ) break;
00433                 }
00434                 if ( nummodopt < NumModOptdollars ) {
00435                     dtype = ModOptdollars[nummodopt].type;
00436                     if ( dtype == MODLOCAL ) {

```

```

00437             d = ModOptdollars[nummodopt].dstruct+AT.identity;
00438         }
00439         else {
00440             LOCK(d->pthreadlockread);
00441         }
00442     }
00443 }
00444 #endif
00445 AO.IsBracket = 0;
00446 AO.OutSkip = 0;
00447 AC.OutputMode = 0;
00448 AO.OutFill = AO.OutputLine;
00449 AO.OutStop = AO.OutputLine + AC.LineLength;
00450 *t = 0;
00451 AddToLine((UBYTE *)Out);
00452 if ( d->nfactors >= 1 && AN.listinprint[2] == DOLLAREXP2 ) {
00453     if ( d->type == 0 ||
00454         ( d->factors == 0 && d->nfactors != 1 ) ) goto dollarzero;
00455     num = EvalDoLoopArg(BHEAD AN.listinprint+2,-1);
00456     if ( num == 0 ) {
00457         value[0] = 4; value[1] = d->nfactors; value[2] = 1; value[3] = 3; value[4]
= 0;
00458         term = value; goto printterms;
00459     }
00460     if ( num == 1 && d->nfactors == 1 ) {
00461         term = d->where;
00462         if ( *term == 0 ) goto dollarzero;
00463         goto printterms;
00464     }
00465     if ( num > d->nfactors ) {
00466         MesPrint("\nFactor number for dollar is too large.");
00467         Terminate(-1);
00468     }
00469     term = d->factors[num-1].where;
00470     if ( term == 0 ) {
00471         if ( d->factors[num-1].value < 0 ) {
00472             value[0] = 4; value[1] = -d->factors[num-1].value; value[2] = 1;
value[3] = -3; value[4] = 0;
00473         }
00474         else {
00475             value[0] = 4; value[1] = d->factors[num-1].value; value[2] = 1;
value[3] = 3; value[4] = 0;
00476         }
00477         term = value;
00478     }
00479     goto printterms;
00480 }
00481 if ( d->type == DOLTERMS || d->type == DOLNUMBER ) {
00482     term = d->where;
00483     first = 1;
00484     do {
00485         if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00486         AO.IsBracket = 0;
00487         AO.OutSkip = 1;
00488         AC.OutputMode = 0;
00489         AO.OutFill = AO.OutputLine;
00490         AO.OutStop = AO.OutputLine + AC.LineLength;
00491         *t = 0;
00492         AddToLine((UBYTE *)Out);
00493         if ( WriteInnerTerm(term,first) ) {
00494             #ifdef WITHPTHREADS
00495                 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00496             #endif
00497             Terminate(-1);
00498         }
00499         first = 0;
00500         t = Out;
00501         u = (char *)AO.OutputLine;
00502         *(AO.OutFill) = 0;
00503         while ( u < (char *) (AO.OutFill) ) *t++ = *u++;
00504         *t = 0;
00505         AO.OutSkip = oldskip;
00506         AC.OutputMode = oldmode;
00507         AO.IsBracket = oldbracket;
00508         AC.LineLength = oldlength;
00509         AO.OutStop = oldStop;
00510         term += *term;
00511     } while ( *term );
00512     AO.OutSkip = oldskip;
00513 }
00514 else if ( d->type == DOLSUBTERM ) {
00515     tt = d->where;
00516     if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00517     AO.IsBracket = 0;
00518     AO.OutSkip = 1;
00519     AC.OutputMode = 0;
00520     AO.OutFill = AO.OutputLine;

```

```

00521         AO.OutStop = AO.OutputLine + AC.LineLength;
00522         *t = 0;
00523         AddToLine((UBYTE *)Out);
00524         if ( WriteSubTerm(tt,1) ) {
00525             #ifdef WITHPTHREADS
00526                 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00527             #endif
00528                 Terminate(-1);
00529         }
00530         t = Out;
00531         u = (char *)AO.OutputLine;
00532         *(AO.OutFill) = 0;
00533         while ( u < (char *) (AO.OutFill) ) *t++ = *u++;
00534         *t = 0;
00535         AO.OutSkip = oldskip;
00536         AC.OutputMode = oldmode;
00537         AO.IsBracket = oldbracket;
00538         AC.LineLength = oldlength;
00539         AO.OutStop = oldStop;
00540     }
00541     else if ( d->type == DOLUNDEFINED ) {
00542         *t++ = '*'; *t++ = '*'; *t++ = '*'; *t = 0;
00543     }
00544     else if ( d->type == DOLZERO ) {
00545         *t++ = '0'; *t = 0;
00546     }
00547     else if ( d->type == DOLINDEX ) {
00548         tt = indsubterm; *tt = INDEX;
00549         tt[1] = 3; tt[2] = d->index;
00550         goto dosubterm;
00551     }
00552     else if ( d->type == DOLARGUMENT ) {
00553         if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00554         AO.IsBracket = 0;
00555         AO.OutSkip = 1;
00556         AC.OutputMode = 0;
00557         AO.OutFill = AO.OutputLine;
00558         AO.OutStop = AO.OutputLine + AC.LineLength;
00559         *t = 0;
00560         AddToLine((UBYTE *)Out);
00561         WriteArgument(d->where);
00562         t = Out;
00563         u = (char *)AO.OutputLine;
00564         *(AO.OutFill) = 0;
00565         while ( u < (char *) (AO.OutFill) ) *t++ = *u++;
00566         *t = 0;
00567         AO.OutSkip = oldskip;
00568         AC.OutputMode = oldmode;
00569         AO.IsBracket = oldbracket;
00570         AC.LineLength = oldlength;
00571         AO.OutStop = oldStop;
00572     }
00573     else if ( d->type == DOLWILDARGS ) {
00574         tt = d->where;
00575         if ( *tt == 0 ) { tt++;
00576             while ( *tt ) {
00577                 if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00578                 AO.IsBracket = 0;
00579                 AO.OutSkip = 1;
00580                 AC.OutputMode = 0;
00581                 AO.OutFill = AO.OutputLine;
00582                 AO.OutStop = AO.OutputLine + AC.LineLength;
00583                 *t = 0;
00584                 AddToLine((UBYTE *)Out);
00585                 WriteArgument(tt);
00586                 NEXTARG(tt);
00587                 if ( *tt ) TokenToLine((UBYTE *)",");
00588                 t = Out;
00589                 u = (char *)AO.OutputLine;
00590                 *(AO.OutFill) = 0;
00591                 while ( u < (char *) (AO.OutFill) ) *t++ = *u++;
00592                 *t = 0;
00593                 AO.OutSkip = oldskip;
00594                 AC.OutputMode = oldmode;
00595                 AO.IsBracket = oldbracket;
00596                 AC.LineLength = oldlength;
00597                 AO.OutStop = oldStop;
00598             }
00599         }
00600     }
00601     else if ( *tt > 0 ) { /* Tensor arguments */
00602         i = *tt++;
00603         while ( --i >= 0 ) {
00604             indsubterm[0] = INDEX;
00605             indsubterm[1] = 3;
00606             indsubterm[2] = *tt++;
00607             if ( AC.LineLength > MAXLINELENGTH ) AC.LineLength = MAXLINELENGTH;
00608             AO.IsBracket = 0;

```

```

00608             AO.OutSkip = 1;
00609             AC.OutputMode = 0;
00610             AO.OutFill = AO.OutputLine;
00611             AO.OutStop = AO.OutputLine + AC.LineLength;
00612             *t = 0;
00613             AddToLine((UBYTE *)Out);
00614             if ( WriteSubTerm(indsubterm,1) ) Terminate(-1);
00615             if ( i > 0 ) TokenToLine((UBYTE *)",");
00616             t = Out;
00617             u = (char *)AO.OutputLine;
00618             *(AO.OutFill) = 0;
00619             while ( u < (char *) (AO.OutFill) ) *t++ = *u++;
00620             *t = 0;
00621             AO.OutSkip = oldskip;
00622             AC.OutputMode = oldmode;
00623             AO.IsBracket = oldbracket;
00624             AC.LineLength = oldlength;
00625             AO.OutStop = oldStop;
00626         }
00627     }
00628 }
00629 #ifdef WITHPTHREADS
00630     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00631 #endif
00632     AN.listinprint += 2;
00633     while ( AN.listinprint[0] == DOLLAREXPR2 ) AN.listinprint += 2;
00634 }
00635 /*
00636     #] dollars :
00637 */
00638 }
00639 #ifdef WITHPTHREADS
00640     else if ( *s == 'W' ) { /* number of the thread with time */
00641         LONG millitime;
00642         WORD timepart;
00643         t = (char *)NumCopy(identity, (UBYTE *)t);
00644         millitime = TimeCPU(1);
00645         timepart = (WORD)(millitime%1000);
00646         millitime /= 1000;
00647         timepart /= 10;
00648         *t++ = '('; *t = 0;
00649         t = (char *)LongCopy(millitime, (char *)t);
00650         *t++ = '.'; *t = 0;
00651         t = (char *)NumCopy(timepart, (UBYTE *)t);
00652         *t++ = ')'; *t = 0;
00653         if ( t >= stopper ) {
00654             num = t - Out;
00655             WriteString(ERROROUT, (UBYTE *)Out, num);
00656             num = 0; t = Out;
00657         }
00658     }
00659     else if ( *s == 'w' ) { /* number of the thread */
00660         t = (char *)NumCopy(identity, (UBYTE *)t);
00661     }
00662 #elif defined(WITHMPI)
00663     else if ( *s == 'W' ) { /* number of the thread with time */
00664         LONG millitime;
00665         WORD timepart;
00666         t = (char *)NumCopy(PF.me, (UBYTE *)t);
00667         millitime = TimeCPU(1);
00668         timepart = (WORD)(millitime%1000);
00669         millitime /= 1000;
00670         timepart /= 10;
00671         *t++ = '('; *t = 0;
00672         t = (char *)LongCopy(millitime, (char *)t);
00673         *t++ = '.'; *t = 0;
00674         t = (char *)NumCopy(timepart, (UBYTE *)t);
00675         *t++ = ')'; *t = 0;
00676         if ( t >= stopper ) {
00677             num = t - Out;
00678             WriteString(ERROROUT, (UBYTE *)Out, num);
00679             num = 0; t = Out;
00680         }
00681     }
00682     else if ( *s == 'w' ) { /* number of the thread */
00683         t = (char *)NumCopy(PF.me, (UBYTE *)t);
00684     }
00685 #else
00686     else if ( *s == 'w' ) { }
00687     else if ( *s == 'W' ) { }
00688 #endif
00689     else if ( FG.cTable[(int)*s] == 1 ) {
00690         x = *s++ - '0';
00691         while ( FG.cTable[(int)*s] == 1 )
00692             x = 10 * x + *s++ - '0';
00693     }
00694     if ( *s == 'l' || *s == 'd' ) {

```

```

00695         if ( *s == 'l' ) { y = va_arg(ap, LONG); }
00696     else { y = va_arg(ap, int); }
00697     if ( y < 0 ) { y = -y; w = 1; }
00698     else w = 0;
00699     u = t + x;
00700     do { *--u = y%10+'0'; y /= 10; } while ( y && u > t );
00701     if ( w && u > t ) *--u = '-';
00702     while ( --u >= t ) *u = ' ';
00703     t += x;
00704 }
00705 else if ( *s == 's' ) {
00706     u = va_arg(ap, char *);
00707     i = 0;
00708     while ( *u ) { i++; u++; }
00709     if ( i > x ) i = x;
00710     while ( x > i ) { *t++ = ' '; x--; }
00711     t += x;
00712     while ( --i >= 0 ) { *--t = *--u; }
00713     t += x;
00714 }
00715 else if ( *s == 'p' ) {
00716     POSITION *pp;
00717     /*#ifdef __GLIBC_HAVE_LONG_LONG */
00718     off_t ly;
00719     /*
00720     #else
00721         LONG ly;
00722     #endif
00723     */
00724     pp = va_arg(ap, POSITION *);
00725     ly = BASEPOSITION(*pp);
00726     u = t + x;
00727     do { *--u = ly%10+'0'; ly /= 10; } while ( ly && u > t );
00728     while ( --u >= t ) *u = ' ';
00729     t += x;
00730 }
00731 else if ( *s == 'i' ) {
00732     w = va_arg(ap, int);
00733     u = t + x;
00734     do { *--u = (char)(w%10+'0'); w /= 10; } while ( u > t );
00735     t += x;
00736 }
00737 else {
00738     w = va_arg(ap, int);
00739     u = t + x;
00740     do { *--u = (char)(w%10+'0'); w /= 10; } while ( w && u > t );
00741     while ( --u >= t ) *u = ' ';
00742     t += x;
00743 }
00744 }
00745 else if ( *s == 'x' ) {
00746     char ccc;
00747     y = va_arg(ap, LONG);
00748     i = 2*sizeof(LONG);
00749     while ( --i > 0 ) {
00750         ccc = ( y >> (i*4) ) & 0xF;
00751         if ( ccc ) break;
00752     }
00753     do {
00754         ccc = ( y >> (i*4) ) & 0xF;
00755         *t++ = hex[(int)ccc];
00756     } while ( --i >= 0 );
00757 }
00758 else if ( *s == '#' ) *t++ = *s;
00759 else if ( *s == '%' ) *t++ = *s;
00760 else if ( *s == 0 ) { *t++ = 0; break; }
00761 else if ( *s == '&' ) {
00762     *t++ = *s;
00763 }
00764 else {
00765     *t++ = '%';
00766     s--;
00767 }
00768 s++;
00769 }
00770 }
00771 num = t - Out;
00772 WriteString(ERROROUT, (UBYTE *)Out, num);
00773 va_end(ap);
00774 if ( specialerror == 1 ) {
00775     MesPrint("!!!Wrong object in Print statement!!!");
00776     MesPrint("!!!Object encountered is of a different type as in the format specifier");
00777 }
00778 AO.OutputLine = oldoutfill;
00779 /*[19apr2004 mt]:*/
00780 WriteFile=OldWrite;
00781 /*:[19apr2004 mt]*/

```

```

00782     return(-1);
00783 }
00784
00785 /*
00786     #] MesPrint :
00787     #[ Warning :
00788 */
00789
00790 void Warning(char *s)
00791 {
00792     iswarning = 1;
00793     if ( AC.WarnFlag ) MesPrint("&Warning: %s",s);
00794     iswarning = 0;
00795 }
00796
00797 /*
00798     #] Warning :
00799     #[ HighWarning :
00800 */
00801
00802 void HighWarning(char *s)
00803 {
00804     iswarning = 1;
00805     if ( AC.WarnFlag >= 2 ) MesPrint("&Warning: %s",s);
00806     iswarning = 0;
00807 }
00808
00809 /*
00810     #] HighWarning :
00811     #[ MesCall :
00812 */
00813
00814 int MesCall(char *s)
00815 {
00816     return(MesPrint((char *)"Called from %s",s));
00817 }
00818
00819 /*
00820     #] MesCall :
00821     #[ MesCerr :
00822 */
00823
00824 int MesCerr(char *s, UBYTE *t)
00825 {
00826     UBYTE *u, c;
00827     WORD i = 11;
00828     u = t;
00829     while ( *u && --i >= 0 ) u--;
00830     u++;
00831     c = *++t;
00832     *t = 0;
00833     MesPrint("&Illegal %s: %s",s,u);
00834     *t = c;
00835     return(-1);
00836 }
00837
00838 /*
00839     #] MesCerr :
00840     #[ MesComp :
00841 */
00842
00843 int MesComp(char *s, UBYTE *p, UBYTE *q)
00844 {
00845     UBYTE c;
00846     c = *++q; *q = 0;
00847     MesPrint("&%s: %s",s,p);
00848     *q = c;
00849     return(-1);
00850 }
00851
00852 /*
00853     #] MesComp :
00854     #[ PrintTerm :
00855 */
00856
00857 void PrintTerm(WORD *term, char *where)
00858 {
00859     UBYTE OutBuf[140];
00860     WORD *t, x;
00861     int i;
00862     AO.OutFill = AO.OutputLine = OutBuf;
00863     t = term;
00864     AO.OutSkip = 3;
00865     FiniLine();
00866     TokenToLine((UBYTE *)where);
00867     TokenToLine((UBYTE *)": ");
00868     i = *t;

```

```

00869     while ( --i >= 0 ) {
00870         x = *t++;
00871         if ( x < 0 ) {
00872             x = -x;
00873             TokenToLine((UBYTE *)"-");
00874         }
00875         TalToLine((UWORD)(x));
00876         TokenToLine((UBYTE *)" ");
00877     }
00878     AO.OutSkip = 0;
00879     FiniLine();
00880 }
00881
00882 /*
00883     #] PrintTerm :
00884     #[ PrintTermC :
00885 */
00886
00887 void PrintTermC(WORD *term, char *where)
00888 {
00889     UBYTE OutBuf[140];
00890     WORD *t, x;
00891     int i;
00892     if ( *term >= 0 ) {
00893         PrintTerm(term,where);
00894         return;
00895     }
00896     AO.OutFill = AO.OutputLine = OutBuf;
00897     t = term;
00898     AO.OutSkip = 3;
00899     FiniLine();
00900     TokenToLine((UBYTE *)where);
00901     TokenToLine((UBYTE *)": ");
00902     i = t[1]+2;
00903     while ( --i >= 0 ) {
00904         x = *t++;
00905         if ( x < 0 ) {
00906             x = -x;
00907             TokenToLine((UBYTE *)"-");
00908         }
00909         TalToLine((UWORD)(x));
00910         TokenToLine((UBYTE *)" ");
00911     }
00912     AO.OutSkip = 0;
00913     FiniLine();
00914 }
00915
00916 /*
00917     #] PrintTermC :
00918     #[ PrintSubTerm :
00919 */
00920
00921 void PrintSubTerm(WORD *term, char *where)
00922 {
00923     UBYTE OutBuf[140];
00924     WORD *t;
00925     int i;
00926     AO.OutFill = AO.OutputLine = OutBuf;
00927     t = term;
00928     AO.OutSkip = 3;
00929     FiniLine();
00930     TokenToLine((UBYTE *)where);
00931     TokenToLine((UBYTE *)": ");
00932     i = t[1];
00933     while ( --i >= 0 ) { TalToLine((UWORD)(*t++)); TokenToLine((UBYTE *)" "); }
00934     AO.OutSkip = 0;
00935     FiniLine();
00936 }
00937
00938 /*
00939     #] PrintSubTerm :
00940     #[ PrintWords :
00941 */
00942
00943 void PrintWords(WORD *buffer, LONG number)
00944 {
00945     UBYTE OutBuf[140];
00946     WORD *t;
00947     AO.OutFill = AO.OutputLine = OutBuf;
00948     t = buffer;
00949     AO.OutSkip = 3;
00950     FiniLine();
00951     while ( --number >= 0 ) { TalToLine((UWORD)(*t++)); TokenToLine((UBYTE *)" "); }
00952     AO.OutSkip = 0;
00953     FiniLine();
00954 }
00955

```

```

00956 /*
00957     #] PrintWords :
00958     #[ PrintSeq :
00959 */
00960
00961 void PrintSeq(WORD *a,char *text)
00962 {
00963     MesPrint(" %s:",text);
00964     while ( *a ) {
00965         MesPrint("      %a",a[0],a);
00966         a += *a;
00967     }
00968 }
00969
00970 /*
00971     #] PrintSeq :
00972     #] exit :
00973 */


```

4.73 minos.c File Reference

```
#include "form3.h"
```

```
#include "minos.h"
```

Include dependency graph for minos.c:

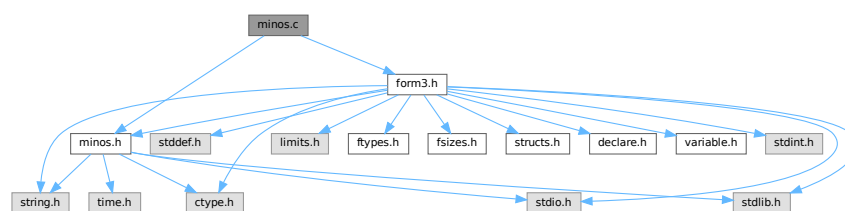

Macros

- `#define` [CFD](#)(y, s, type, x, j)
- `#define` [CTD](#)(y, s, type, x, j)

Functions

- int [minosread](#) (FILE *f, char *buffer, MLONG size)
- int [minoswrite](#) (FILE *f, char *buffer, MLONG size)
- char * [str_dup](#) (char *str)
- void [convertblock](#) (INDEXBLOCK *in, INDEXBLOCK *out, int mode)
- void [convertnamesblock](#) (NAMESBLOCK *in, NAMESBLOCK *out, int mode)
- void [convertiniinfo](#) (INIINFO *in, INIINFO *out, int mode)
- FILE * [LocateBase](#) (char **name, char **newname, char *iomode)
- int [ReadIndex](#) (DBASE *d)
- int [WriteIndexBlock](#) (DBASE *d, MLONG num)
- int [WriteNamesBlock](#) (DBASE *d, MLONG num)
- int [WriteIndex](#) (DBASE *d)
- int [WriteIniInfo](#) (DBASE *d)
- int [ReadIniInfo](#) (DBASE *d)
- DBASE * [GetDbase](#) (char *filename, MLONG rwmode)
- DBASE * [NewDbase](#) (char *name, MLONG number)

- void [FreeTableBase](#) ([DBASE](#) *d)
- int [ComposeTableNames](#) ([DBASE](#) *d)
- [DBASE](#) * [OpenDbase](#) (char *filename)
- MLONG [AddTableName](#) ([DBASE](#) *d, char *name, [TABLES](#) T)
- MLONG [GetTableName](#) ([DBASE](#) *d, char *name)
- int [PutTableNames](#) ([DBASE](#) *d)
- int [AddToIndex](#) ([DBASE](#) *d, MLONG number)
- MLONG [AddObject](#) ([DBASE](#) *d, MLONG tablename, char *arguments, char *rhs)
- MLONG [FindTableNumber](#) ([DBASE](#) *d, char *name)
- int [WriteObject](#) ([DBASE](#) *d, MLONG tablename, char *arguments, char *rhs, MLONG number)
- char * [ReadObject](#) ([DBASE](#) *d, MLONG tablename, char *arguments)
- char * [ReadijObject](#) ([DBASE](#) *d, MLONG i, MLONG j, char *arguments)
- int [ExistsObject](#) ([DBASE](#) *d, MLONG tablename, char *arguments)
- int [DeleteObject](#) ([DBASE](#) *d, MLONG tablename, char *arguments)

Variables

- int [withoutflush](#) = 0

4.73.1 Detailed Description

These are the low level functions for the database part of the tablebases. These routines have been copied (and then adapted) from the minos database program. This file goes together with [minos.h](#)

Definition in file [minos.c](#).

4.73.2 Macro Definition Documentation

4.73.2.1 CFD

```
#define CFD(
    y,
    s,
    type,
    x,
    j )
```

Value:

```
for(x=0, j=0; j<((int) sizeof(type)); j++) \
{ x=(x<<8)+((*(s++)&0x00FF)); } y=x;
```

Definition at line 55 of file [minos.c](#).

4.73.2.2 CTD

```
#define CTD(
    y,
    s,
    type,
    x,
    j )
```

Value:

```
x=y; for(j=sizeof(type)-1; j>=0; j--) { s[j]=x&0xFF; \
x>>=8; } s += sizeof(type);
```

Definition at line 57 of file [minos.c](#).

4.73.3 Function Documentation

4.73.3.1 minosread()

```
int minosread (
    FILE * f,
    char * buffer,
    MLONG size )
```

Definition at line 66 of file [minos.c](#).

4.73.3.2 minoswrite()

```
int minoswrite (
    FILE * f,
    char * buffer,
    MLONG size )
```

Definition at line 83 of file [minos.c](#).

4.73.3.3 str_dup()

```
char * str_dup (
    char * str )
```

Definition at line 101 of file [minos.c](#).

4.73.3.4 convertblock()

```
void convertblock (
    INDEXBLOCK * in,
    INDEXBLOCK * out,
    int mode )
```

Definition at line 120 of file [minos.c](#).

4.73.3.5 convertnamesblock()

```
void convertnamesblock (
    NAMESBLOCK * in,
    NAMESBLOCK * out,
    int mode )
```

Definition at line 171 of file [minos.c](#).

4.73.3.6 convertiniinfo()

```
void convertiniinfo (
    INIINFO * in,
    INIINFO * out,
    int mode )
```

Definition at line 197 of file [minos.c](#).

4.73.3.7 LocateBase()

```
FILE * LocateBase (
    char ** name,
    char ** newname,
    char * iomode )
```

Definition at line 225 of file [minos.c](#).

4.73.3.8 ReadIndex()

```
int ReadIndex (
    DBASE * d )
```

Definition at line 288 of file [minos.c](#).

4.73.3.9 WriteIndexBlock()

```
int WriteIndexBlock (
    DBASE * d,
    MLONG num )
```

Definition at line 399 of file [minos.c](#).

4.73.3.10 WriteNamesBlock()

```
int WriteNamesBlock (
    DBASE * d,
    MLONG num )
```

Definition at line 420 of file [minos.c](#).

4.73.3.11 WriteIndex()

```
int WriteIndex (
    DBASE * d )
```

Definition at line 443 of file [minos.c](#).

4.73.3.12 WriteIniInfo()

```
int WriteIniInfo (
    DBASE * d )
```

Definition at line 506 of file [minos.c](#).

4.73.3.13 ReadIniInfo()

```
int ReadIniInfo (
    DBASE * d )
```

Definition at line 523 of file [minos.c](#).

4.73.3.14 GetDbase()

```
DBASE * GetDbase (
    char * filename,
    MLONG rwmode )
```

Definition at line 546 of file [minos.c](#).

4.73.3.15 NewDbase()

```
DBASE * NewDbase (
    char * name,
    MLONG number )
```

Definition at line 602 of file [minos.c](#).

4.73.3.16 FreeTableBase()

```
void FreeTableBase (
    DBASE * d )
```

Definition at line 739 of file [minos.c](#).

4.73.3.17 ComposeTableNames()

```
int ComposeTableNames (
    DBASE * d )
```

Definition at line 771 of file [minos.c](#).

4.73.3.18 OpenDbase()

```
DBASE * OpenDbase (
    char * filename )
```

Definition at line 820 of file [minos.c](#).

4.73.3.19 AddTableName()

```
MLONG AddTableName (
    DBASE * d,
    char * name,
    TABLES T )
```

Definition at line 854 of file [minos.c](#).

4.73.3.20 GetTableName()

```
MLONG GetTableName (
    DBASE * d,
    char * name )
```

Definition at line 937 of file [minos.c](#).

4.73.3.21 PutTableNames()

```
int PutTableNames (
    DBASE * d )
```

Definition at line 969 of file [minos.c](#).

4.73.3.22 AddToIndex()

```
int AddToIndex (
    DBASE * d,
    MLONG number )
```

Definition at line 1065 of file [minos.c](#).

4.73.3.23 AddObject()

```
MLONG AddObject (
    DBASE * d,
    MLONG tablename,
    char * arguments,
    char * rhs )
```

Definition at line 1152 of file [minos.c](#).

4.73.3.24 FindTableNumber()

```
MLONG FindTableNumber (
    DBASE * d,
    char * name )
```

Definition at line 1166 of file [minos.c](#).

4.73.3.25 WriteObject()

```
int WriteObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments,
    char * rhs,
    MLONG number )
```

Definition at line 1194 of file [minos.c](#).

4.73.3.26 ReadObject()

```
char * ReadObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments )
```

Definition at line 1294 of file [minos.c](#).

4.73.3.27 ReadijObject()

```
char * ReadijObject (
    DBASE * d,
    MLONG i,
    MLONG j,
    char * arguments )
```

Definition at line 1375 of file [minos.c](#).

4.73.3.28 ExistsObject()

```
int ExistsObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments )
```

Definition at line 1427 of file [minos.c](#).

4.73.3.29 DeleteObject()

```
int DeleteObject (
    DBASE * d,
    MLONG tablenumber,
    char * arguments )
```

Definition at line 1459 of file [minos.c](#).

4.73.4 Variable Documentation

4.73.4.1 withoutflush

```
int withoutflush = 0
```

Definition at line 45 of file [minos.c](#).

4.74 minos.c

[Go to the documentation of this file.](#)

```
00001
00007 /* #[ License : */
00008 /*
00009 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00010 *   When using this file you are requested to refer to the publication
00011 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00012 *   This is considered a matter of courtesy as the development was paid
00013 *   for by FOM the Dutch physics granting agency and we would like to
00014 *   be able to track its scientific use to convince FOM of its value
00015 *   for the community.
00016 *
00017 *   This file is part of FORM.
00018 *
00019 *   FORM is free software: you can redistribute it and/or modify it under the
00020 *   terms of the GNU General Public License as published by the Free Software
00021 *   Foundation, either version 3 of the License, or (at your option) any later
00022 *   version.
00023 *
00024 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00025 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00026 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00027 *   details.
00028 *
00029 *   You should have received a copy of the GNU General Public License along
00030 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00031 */
00032 /* #[ License : */
00033 /*
00034 *   #[ Includes :
00035 *
00036 *   File contains the lowlevel routines for the management of primitive
00037 *   database-like files. The structures are explained in the file manage.h
00038 *   Original file for minos made by J.Vermaseren, april-1994.
00039 *
00040 *   Note: the minos primitives for writing are never invoked in parallel.
00041 */
00042
00043 #include "form3.h"
00044 #include "minos.h"
00045 int withoutflush = 0;
00046
00047 /*
00048 *   #[ Includes :
00049 *   #[ Variables :
00050 */
00051
00052 static INDEXBLOCK scratchblock;
00053 static NAMESBLOCK scratchnamesblock;
00054
00055 #define CFD(y,s,type,x,j) for(x=0,j=0;j<((int)sizeof(type));j++) \
00056     {x=(x<<8)+((s++)&0x00FF);} y=x;
00057 #define CTD(y,s,type,x,j) x=y;for(j=sizeof(type)-1;j>=0;j--){s[j]=x&0xFF; \
00058     x>>8;} s += sizeof(type);
00059
00060 /*
00061 *   #[ Variables :
00062 *   #[ Utilities :
00063 *   #[ minosread :
00064 */
00065
00066 int minosread(FILE *f,char *buffer,MLONG size)
00067 {
00068     MLONG x;
00069     while ( size > 0 ) {
00070         x = fread(buffer,sizeof(char),size,f);
00071         if ( x <= 0 ) return(-1);
```

```

00072         buffer += x;
00073         size -= x;
00074     }
00075     return(0);
00076 }
00077
00078 /*
00079     #] minosread :
00080     #[ minoswrite :
00081 */
00082
00083 int minoswrite(FILE *f, char *buffer, MLONG size)
00084 {
00085     MLONG x;
00086     while ( size > 0 ) {
00087         x = fwrite(buffer, sizeof(char), size, f);
00088         if ( x <= 0 ) return(-1);
00089         buffer += x;
00090         size -= x;
00091     }
00092     if ( withoutflush == 0 ) fflush(f);
00093     return(0);
00094 }
00095
00096 /*
00097     #] minoswrite :
00098     #[ str_dup :
00099 */
00100
00101 char *str_dup(char *str)
00102 {
00103     char *s, *t;
00104     int i;
00105     s = str;
00106     while ( *s ) s++;
00107     i = s - str + 1;
00108     if ( ( s = (char *)Malloc1((size_t)i, "a string copy") ) == 0 ) return(0);
00109     t = s;
00110     while ( *str ) *t++ = *str++;
00111     *t = 0;
00112     return(s);
00113 }
00114
00115 /*
00116     #] str_dup :
00117     #[ convertblock :
00118 */
00119
00120 void convertblock(INDEXBLOCK *in, INDEXBLOCK *out, int mode)
00121 {
00122     char *s, *t;
00123     MLONG i, x;
00124     int j;
00125     OBJECTS *obj;
00126     switch ( mode ) {
00127     case TODISK:
00128         s = (char *)out;
00129         CTD(in->flags, s, MLONG, x, j)
00130         CTD(in->previousblock, s, MLONG, x, j)
00131         CTD(in->position, s, MLONG, x, j)
00132         for ( i = 0, obj = in->objects; i < NUMOBJECTS; i++, obj++ ) {
00133             CTD(obj->position, s, MLONG, x, j)
00134             CTD(obj->size, s, MLONG, x, j)
00135             CTD(obj->date, s, MLONG, x, j)
00136             CTD(obj->tablenumber, s, MLONG, x, j)
00137             CTD(obj->uncompressed, s, MLONG, x, j)
00138             CTD(obj->spare1, s, MLONG, x, j)
00139             CTD(obj->spare2, s, MLONG, x, j)
00140             CTD(obj->spare3, s, MLONG, x, j)
00141             t = obj->element;
00142             for ( j = 0; j < ELEMENTSIZE; j++ ) *s++ = *t++;
00143         }
00144         break;
00145     case FROMDISK:
00146         s = (char *)in;
00147         CFD(out->flags, s, MLONG, x, j)
00148         CFD(out->previousblock, s, MLONG, x, j)
00149         CFD(out->position, s, MLONG, x, j)
00150         for ( i = 0, obj = out->objects; i < NUMOBJECTS; i++, obj++ ) {
00151             CFD(obj->position, s, MLONG, x, j)
00152             CFD(obj->size, s, MLONG, x, j)
00153             CFD(obj->date, s, MLONG, x, j)
00154             CFD(obj->tablenumber, s, MLONG, x, j)
00155             CFD(obj->uncompressed, s, MLONG, x, j)
00156             CFD(obj->spare1, s, MLONG, x, j)
00157             CFD(obj->spare2, s, MLONG, x, j)
00158             CFD(obj->spare3, s, MLONG, x, j)

```



```

00159         t = obj->element;
00160         for ( j = 0; j < ELEMENTSIZE; j++ ) *t++ = *s++;
00161     }
00162     break;
00163 }
00164 }
00165
00166 /*
00167     #] convertblock :
00168     #[ convertnamesblock :
00169 */
00170
00171 void convertnamesblock(NAMESBLOCK *in,NAMESBLOCK *out,int mode)
00172 {
00173     char *s;
00174     MLONG x;
00175     int j;
00176     switch ( mode ) {
00177     case TODISK:
00178         s = (char *)out;
00179         CTD(in->previousblock,s,MLONG,x,j)
00180         CTD(in->position,s,MLONG,x,j)
00181         for ( j = 0; j < NAMETABLESIZE; j++ ) out->names[j] = in->names[j];
00182         break;
00183     case FROMDISK:
00184         s = (char *)in;
00185         CFD(out->previousblock,s,MLONG,x,j)
00186         CFD(out->position,s,MLONG,x,j)
00187         for ( j = 0; j < NAMETABLESIZE; j++ ) out->names[j] = in->names[j];
00188         break;
00189     }
00190 }
00191
00192 /*
00193     #] convertnamesblock :
00194     #[ convertiniinfo :
00195 */
00196
00197 void convertiniinfo(INIINFO *in,INIINFO *out,int mode)
00198 {
00199     char *s;
00200     MLONG i, x, *y;
00201     int j;
00202     switch ( mode ) {
00203     case TODISK:
00204         s = (char *)out; y = (MLONG *)in;
00205         for ( i = sizeof(INIINFO)/sizeof(MLONG); i > 0; i-- ) {
00206             CTD(*y,s,MLONG,x,j)
00207             y++;
00208         }
00209         break;
00210     case FROMDISK:
00211         s = (char *)in; y = (MLONG *)out;
00212         for ( i = sizeof(INIINFO)/sizeof(MLONG); i > 0; i-- ) {
00213             CFD(*y,s,MLONG,x,j)
00214             y++;
00215         }
00216         break;
00217     }
00218 }
00219
00220 /*
00221     #] convertiniinfo :
00222     #[ LocateBase :
00223 */
00224
00225 FILE *LocateBase(char **name, char **newname, char *iomode)
00226 {
00227     FILE *handle;
00228     int namesize, i;
00229     UBYTE *s, *to, *u1, *u2, *indir;
00230
00231     if ( ( handle = fopen(*name,iomode) ) != 0 ) {
00232         *newname = (char *)strDup1((UBYTE *)(*name),"LocateBase");
00233         return(handle);
00234     }
00235     namesize = 2; s = (UBYTE *)(*name);
00236     while ( *s ) { s++; namesize++; }
00237     indir = AM.IncDir;
00238     if ( indir ) {
00239         s = indir; i = 0;
00240         while ( *s ) { s++; i++; }
00241         *newname = (char *)Malloc1(namesize+i,"LocateBase");
00242         s = indir; to = (UBYTE *)(*newname);
00243         while ( *s ) *to++ = *s++;
00244         if ( to > (UBYTE *)(*newname) && to[-1] != SEPARATOR ) *to++ = SEPARATOR;
00245         s = (UBYTE *)(*name);

```

```

00246         while ( *s ) *to++ = *s++;
00247         *to = 0;
00248         if ( ( handle = fopen(*newname,iomode) ) != 0 ) {
00249             return(handle);
00250         }
00251         M_free(*newname,"LocateBase, incdir/file");
00252     }
00253     if ( AM.Path ) {
00254         ul = AM.Path;
00255         while ( *ul ) {
00256             u2 = ul; i = 0;
00257             while ( *ul && *ul != ':' ) {
00258                 if ( *ul == '\\\\' ) ul++;
00259                 ul++; i++;
00260             }
00261             *newname = (char *)Malloca1(namesize+i,"LocateBase");
00262             s = u2; to = (UBYTE *)(*newname);
00263             while ( s < ul ) {
00264                 if ( *s == '\\\\' ) s++;
00265                 *to++ = *s++;
00266             }
00267             if ( to > (UBYTE *)(*newname) && to[-1] != SEPARATOR ) *to++ = SEPARATOR;
00268             s = (UBYTE *)(*name);
00269             while ( *s ) *to++ = *s++;
00270             *to = 0;
00271             if ( ( handle = fopen(*newname,iomode) ) != 0 ) {
00272                 return(handle);
00273             }
00274             M_free(*newname,"LocateBase Path/file");
00275             if ( *ul ) ul++;
00276         }
00277     }
00278     /* Error1("LocateBase: Cannot find file",*name); */
00279     return(0);
00280 }
00281
00282 /*
00283     #] LocateBase :
00284     #] Utilities :
00285     #[ ReadIndex :
00286 */
00287
00288 int ReadIndex(DBASE *d)
00289 {
00290     MLONG i;
00291     INDEXBLOCK **ib;
00292     NAMESBLOCK **ina;
00293     MLONG position, size;
00294     /*
00295     Allocate the pieces one by one (makes it easier to give it back)
00296     */
00297     if ( d->info.numberofindexblocks <= 0 ) return(0);
00298     if ( sizeof(INDEXBLOCK)*d->info.numberofindexblocks > MAXINDEXSIZE ) {
00299         MesPrint("We need more than %ld bytes for the index.\n",MAXINDEXSIZE);
00300         MesPrint("The file %s may not be a proper database\n",d->name);
00301         return(-1);
00302     }
00303     size = sizeof(INDEXBLOCK *)*d->info.numberofindexblocks;
00304     if ( ( ib = (INDEXBLOCK **)Malloca1(size,"tb,index") ) == 0 ) return(-1);
00305     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
00306         if ( ( ib[i] = (INDEXBLOCK *)Malloca1(sizeof(INDEXBLOCK),"index block") ) == 0 ) {
00307             for ( --i; i >= 0; i-- ) M_free(ib[i],"tb,indexblock");
00308             M_free(ib,"tb,index");
00309             return(-1);
00310         }
00311     }
00312     size = sizeof(NAMESBLOCK *)*d->info.numberofnamesblocks;
00313     if ( ( ina = (NAMESBLOCK **)Malloca1(size,"tb,indexnames") ) == 0 ) return(-1);
00314     for ( i = 0; i < d->info.numberofnamesblocks; i++ ) {
00315         if ( ( ina[i] = (NAMESBLOCK *)Malloca1(sizeof(NAMESBLOCK),"index names block") ) == 0 ) {
00316             for ( --i; i >= 0; i-- ) M_free(ina[i],"index names block");
00317             M_free(ina,"tb,indexnames");
00318             for ( i = 0; i < d->info.numberofindexblocks; i++ ) M_free(ib[i],"tb,indexblock");
00319             M_free(ib,"tb,index");
00320             return(-1);
00321         }
00322     }
00323     /*
00324     Read the index blocks, from the back to the front. The links are only
00325     reliable that way.
00326     */
00327     position = d->info.lastindexblock;
00328     for ( i = d->info.numberofindexblocks - 1; i >= 0; i-- ) {
00329         fseek(d->handle,position,SEEK_SET);
00330         if ( minosread(d->handle,(char *)(&scratchblock),sizeof(INDEXBLOCK)) ) {
00331             MesPrint("Error while reading file %s\n",d->name);
00332             thisiswrong:

```

```

00333         for ( i = 0; i < d->info.numberofnamesblocks; i++ ) M_free(ina[i],"index names block");
00334         M_free(ina,"tb,indexnames");
00335         for ( i = 0; i < d->info.numberofindexblocks; i++ ) M_free(ib[i],"tb,indexblock");
00336         M_free(ib,"tb,index");
00337         return(-1);
00338     }
00339     convertblock(&scratchblock,ib[i],FROMDISK);
00340     if ( ib[i]->position != position ||
00341         ( ib[i]->previousblock <= 0 && i > 0 ) ) {
00342         MesPrint("File %s has inconsistent contents\n",d->name);
00343         goto thisiswrong;
00344     }
00345     position = ib[i]->previousblock;
00346 }
00347 d->info.firstindexblock = ib[0]->position;
00348 for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
00349     ib[i]->flags &= MCLEANFLAG;
00350 }
00351 /*
00352 Read the names blocks, from the back to the front. The links are only
00353 reliable that way.
00354 */
00355 position = d->info.lastnameblock;
00356 for ( i = d->info.numberofnamesblocks - 1; i >= 0; i-- ) {
00357     fseek(d->handle,position,SEEK_SET);
00358     if ( minosread(d->handle,(char *)(&scratchnamesblock),sizeof(NAMESBLOCK)) ) {
00359         MesPrint("Error while reading file %s\n",d->name);
00360         goto thisiswrong;
00361     }
00362     convertnamesblock(&scratchnamesblock,ina[i],FROMDISK);
00363     if ( ina[i]->position != position ||
00364         ( ina[i]->previousblock <= 0 && i > 0 ) ) {
00365         MesPrint("File %s has inconsistent contents\n",d->name);
00366         goto thisiswrong;
00367     }
00368     position = ina[i]->previousblock;
00369 }
00370 d->info.firstnameblock = ina[0]->position;
00371 /*
00372 Give the old info back to the system.
00373 */
00374 if ( d->iblocks ) {
00375     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
00376         if ( d->iblocks[i] ) M_free(d->iblocks[i],"d->iblocks[i]");
00377     }
00378     M_free(d->iblocks,"d->iblocks");
00379 }
00380 if ( d->nblocks ) {
00381     for ( i = 0; i < d->info.numberofnamesblocks; i++ ) {
00382         if ( d->nblocks[i] ) M_free(d->nblocks[i],"d->nblocks[i]");
00383     }
00384     M_free(d->nblocks,"d->nblocks");
00385 }
00386 /*
00387 And substitute the new blocks
00388 */
00389 d->iblocks = ib;
00390 d->nblocks = ina;
00391 return(0);
00392 }
00393
00394 /*
00395 #] ReadIndex :
00396 #[ WriteIndexBlock :
00397 */
00398
00399 int WriteIndexBlock(DBASE *d,MLONG num)
00400 {
00401     if ( num >= d->info.numberofindexblocks ) {
00402         MesPrint("Illegal number specified for number of index blocks\n");
00403         return(-1);
00404     }
00405     fseek(d->handle,d->iblocks[num]->position,SEEK_SET);
00406     convertblock(d->iblocks[num],&scratchblock,TODISK);
00407     if ( minoswrite(d->handle,(char *)(&scratchblock),sizeof(INDEXBLOCK)) ) {
00408         MesPrint("Error while writing an index block in file %s\n",d->name);
00409         MesPrint("File may be unreliable now\n");
00410         return(-1);
00411     }
00412     return(0);
00413 }
00414
00415 /*
00416 #] WriteIndexBlock :
00417 #[ WriteNamesBlock :
00418 */
00419

```

```

00420 int WriteNamesBlock(DBASE *d,MLONG num)
00421 {
00422     if ( num >= d->info.numberofnamesblocks ) {
00423         MesPrint("Illegal number specified for number of names blocks\n");
00424         return(-1);
00425     }
00426     fseek(d->handle,d->nblocks[num]->position,SEEK_SET);
00427     convertnamesblock(d->nblocks[num],&scratchnamesblock,TODISK);
00428     if ( minoswrite(d->handle,(char *)(&scratchnamesblock),sizeof(NAMESBLOCK)) ) {
00429         MesPrint("Error while writing a names block in file %s\n",d->name);
00430         MesPrint("File may be unreliable now\n");
00431         return(-1);
00432     }
00433     return(0);
00434 }
00435
00436 /*
00437 #] WriteNamesBlock :
00438 #[ WriteIndex :
00439
00440 Problem here is to get the links right.
00441 */
00442
00443 int WriteIndex(DBASE *d)
00444 {
00445     MLONG i, position;
00446     if ( d->iblocks == 0 ) return(0);
00447     if ( d->nblocks == 0 ) return(0);
00448     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
00449         if ( d->iblocks[i] == 0 ) {
00450             MesPrint("Error: unassigned index blocks. Cannot write\n");
00451             return(-1);
00452         }
00453     }
00454     for ( i = 0; i < d->info.numberofnamesblocks; i++ ) {
00455         if ( d->nblocks[i] == 0 ) {
00456             MesPrint("Error: unassigned names blocks. Cannot write\n");
00457             return(-1);
00458         }
00459     }
00460     d->info.lastindexblock = -1;
00461     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
00462         position = d->iblocks[i]->position;
00463         if ( position <= 0 ) {
00464             fseek(d->handle,0,SEEK_END);
00465             position = ftell(d->handle);
00466             d->iblocks[i]->position = position;
00467             if ( i <= 0 ) d->iblocks[i]->previousblock = -1;
00468             else d->iblocks[i]->previousblock = d->iblocks[i-1]->position;
00469         }
00470         else fseek(d->handle,position,SEEK_SET);
00471         convertblock(d->iblocks[i],&scratchblock,TODISK);
00472         if ( minoswrite(d->handle,(char *)(&scratchblock),sizeof(INDEXBLOCK)) ) {
00473             MesPrint("Error while writing index of file %s",d->name);
00474             d->iblocks[i]->position = -1;
00475             return(-1);
00476         }
00477         d->info.lastindexblock = position;
00478     }
00479     d->info.lastnameblock = -1;
00480     for ( i = 0; i < d->info.numberofnamesblocks; i++ ) {
00481         position = d->nblocks[i]->position;
00482         if ( position <= 0 ) {
00483             fseek(d->handle,0,SEEK_END);
00484             position = ftell(d->handle);
00485             d->nblocks[i]->position = position;
00486             if ( i <= 0 ) d->nblocks[i]->previousblock = -1;
00487             else d->nblocks[i]->previousblock = d->nblocks[i-1]->position;
00488         }
00489         else fseek(d->handle,position,SEEK_SET);
00490         convertnamesblock(d->nblocks[i],&scratchnamesblock,TODISK);
00491         if ( minoswrite(d->handle,(char *)(&scratchnamesblock),sizeof(NAMESBLOCK)) ) {
00492             MesPrint("Error while writing index of file %s",d->name);
00493             d->nblocks[i]->position = -1;
00494             return(-1);
00495         }
00496         d->info.lastnameblock = position;
00497     }
00498     return(0);
00499 }
00500
00501 /*
00502 #] WriteIndex :
00503 #[ WriteIniInfo :
00504 */
00505
00506 int WriteIniInfo(DBASE *d)

```

```

00507 {
00508     INIINFO inf;
00509     fseek(d->handle,0,SEEK_SET);
00510     convertiniinfo(&(d->info),&inf,TODISK);
00511     if ( minoswrite(d->handle,(char *)(&inf),sizeof(INIINFO)) ) {
00512         MesPrint("Error while writing masterindex of file %s",d->name);
00513         return(-1);
00514     }
00515     return(0);
00516 }
00517
00518 /*
00519 #] WriteIniInfo :
00520 #[ ReadIniInfo :
00521 */
00522
00523 int ReadIniInfo(DBASE *d)
00524 {
00525     INIINFO inf;
00526     fseek(d->handle,0,SEEK_SET);
00527     if ( minosread(d->handle,(char *)(&inf),sizeof(INIINFO)) ) {
00528         MesPrint("Error while reading masterindex of file %s",d->name);
00529         return(-1);
00530     }
00531     convertiniinfo(&inf,&(d->info),FROMDISK);
00532     if ( d->info.entriesinindex < 0
00533         || d->info.numberofindexblocks < 0
00534         || d->info.lastindexblock < 0 ) {
00535         MesPrint("The file %s is not a proper database\n",d->name);
00536         return(-1);
00537     }
00538     return(0);
00539 }
00540
00541 /*
00542 #] ReadIniInfo :
00543 #[ GetDbase :
00544 */
00545
00546 DBASE *GetDbase(char *filename, MLONG rwmode)
00547 {
00548     FILE *f;
00549     DBASE *d;
00550     char *newname;
00551     if ( rwmode == 0 ) {
00552         if ( ( f = LocateBase(&filename,&newname,"rb") ) == 0 ) {
00553             MesPrint("&Trying to open non-existent TableBase in readonly mode: %s", filename);
00554             Terminate(-1);
00555         }
00556     } else {
00557         if ( ( f = LocateBase(&filename,&newname,"r+b") ) == 0 ) {
00558             return(NewDbase(filename,0));
00559         }
00560     }
00561 }
00562 }
00563
00564 /* setbuf(f,0); */
00565 d = (DBASE *)From0List(&(AC.TableBaseList));
00566 d->mode = 0;
00567 d->tablenamessize = 0;
00568 d->topnumber = 0;
00569 d->tablenameefill = 0;
00570 d->iblocks = 0;
00571 d->nblocks = 0;
00572 d->tablenames = 0;
00573 d->rwmode = rwmode;
00574
00575 d->info.entriesinindex = 0;
00576 d->info.numberofindexblocks = 0;
00577 d->info.firstindexblock = 0;
00578 d->info.lastindexblock = 0;
00579 d->info.numberoftables = 0;
00580 d->info.numberofnamesblocks = 0;
00581 d->info.firstnameblock = 0;
00582 d->info.lastnameblock = 0;
00583
00584 d->name = str_dup(filename); /* For the moment just for the error messages */
00585 d->handle = f;
00586 if ( ReadIniInfo(d) || ReadIndex(d) ) { M_free(d,"index-d"); fclose(f); return(0); }
00587 if ( ComposeTableNames(d) < 0 ) { FreeTableBase(d); fclose(f); return(0); }
00588 // free allocation from previous str_dup
00589 M_free(d->name, "from str_dup");
00590 d->name = str_dup(filename);
00591 d->fullname = newname;
00592 return(d);
00593 }

```

```

00594
00595 /*
00596     #] GetDbase :
00597     #[ NewDbase :
00598
00599     Creates a new database with 'number' entries in the index.
00600 */
00601
00602 DBASE *NewDbase(char *name,MLONG number)
00603 {
00604     FILE *f;
00605     DBASE *d;
00606     MLONG numblocks, numnameblocks, i;
00607     char *s;
00608     /*-----change 10-feb-2003 */
00609     int j, jj;
00610     MLONG t = (MLONG) (time(0));
00611     /*-----*/
00612     if ( number < 0 ) number = 0;
00613     if ( ( f = fopen(name,"w+b") ) == 0 ) {
00614         MesPrint("Could not create a new file with name %s\n",name);
00615         return(0);
00616     }
00617     numblocks = (number+NUMOBJECTS-1)/NUMOBJECTS;
00618     numnameblocks = 1;
00619     if ( numblocks <= 0 ) numblocks = 1;
00620     if ( numnameblocks <= 0 ) numnameblocks = 1;
00621     d = (DBASE *)From0List(&(AC.TableBaseList));
00622     if ( ( d->iblocks = (INDEXBLOCK **)Malloc1(numblocks*sizeof(INDEXBLOCK *),
00623 "new database") ) == 0 ) {
00624         NumTableBases--;
00625         return(0);
00626     }
00627     d->tablenames = 0;
00628     d->tablenamessize = 0;
00629     d->topnumber = 0;
00630     d->tablenamefill = 0;
00631     d->rwmode = 1;
00632
00633     d->mode = 0;
00634     if ( ( d->nblocks = (NAMESBLOCK **)Malloc1(sizeof(NAMESBLOCK *)*numnameblocks,
00635 "new database") ) == 0 ) {
00636         M_free(d->iblocks,"new database");
00637         NumTableBases--;
00638         return(0);
00639     }
00640     if ( ( f = fopen(name,"w+b") ) == 0 ) {
00641         MesPrint("Could not create new file %s\n",name);
00642         NumTableBases--;
00643         return(0);
00644     }
00645     /* setbuf(f,0); */
00646     d->name = str_dup(name);
00647     d->fullname = str_dup(name);
00648     d->handle = f;
00649
00650     d->info.entriesinindex = number;
00651     d->info.numberofindexblocks = numblocks;
00652     d->info.numberofnamesblocks = numnameblocks;
00653     d->info.firstindexblock = 0;
00654     d->info.lastindexblock = 0;
00655     d->info.numberoftables = 0;
00656     d->info.firstnameblock = 0;
00657     d->info.lastnameblock = 0;
00658
00659     if ( WriteIniInfo(d) ) {
00660 getout:
00661         fclose(f);
00662         remove(d->fullname);
00663         if ( d->name ) { M_free(d->name,"name tablebase"); d->name = 0; }
00664         if ( d->fullname ) { M_free(d->fullname,"fullname tablebase"); d->fullname = 0; }
00665         M_free(d->nblocks,"new database");
00666         M_free(d->iblocks,"new database");
00667         NumTableBases--;
00668         return(0);
00669     }
00670     for ( i = 0; i < numblocks; i++ ) {
00671         if ( ( d->iblocks[i] = (INDEXBLOCK *)Malloc1(sizeof(INDEXBLOCK),
00672 "index blocks of new database") ) == 0 ) {
00673             while ( --i >= 0 ) M_free(d->iblocks[i],"index blocks of new database");
00674             goto getout;
00675         }
00676         if ( i > 0 ) d->iblocks[i]->previousblock = d->iblocks[i-1]->position;
00677         else d->iblocks[i]->previousblock = -1;
00678         d->iblocks[i]->position = ftell(f);
00679         // Initialise, to keep valgrind happy
00680         d->iblocks[i]->flags = -1;

```

```

00681 /*-----change 10-feb-2003 */
00682 /*
00683         Zero things properly. We don't want garbage in the file.
00684 */
00685     for ( j = 0; j < NUMOBJECTS; j++ ) {
00686         d->iblocks[i]->objects[j].date = t;
00687         d->iblocks[i]->objects[j].size = 0;
00688         d->iblocks[i]->objects[j].position = -1;
00689         d->iblocks[i]->objects[j].tablenumber = 0;
00690         d->iblocks[i]->objects[j].uncompressed = 0;
00691         d->iblocks[i]->objects[j].spare1 = 0;
00692         d->iblocks[i]->objects[j].spare2 = 0;
00693         d->iblocks[i]->objects[j].spare3 = 0;
00694         for ( jj = 0; jj < ELEMENTSIZE; jj++ ) d->iblocks[i]->objects[j].element[jj] = 0;
00695     }
00696     convertblock(d->iblocks[i],&scratchblock,TODISK);
00697     if ( minoswrite(d->handle,(char *)(&scratchblock),sizeof(INDEXBLOCK)) ) {
00698         MesPrint("Error while writing new index blocks\n");
00699         goto getout;
00700     }
00701 }
00702 for ( i = 0; i < numnameblocks; i++ ) {
00703     if ( ( d->nblocks[i] = (NAMESBLOCK *)Malloc1(sizeof(NAMESBLOCK),
00704         "names blocks of new database") ) == 0 ) {
00705         while ( --i >= 0 ) M_free(d->nblocks[i],"names blocks of new database"); }
00706         for ( i = 0; i < numblocks; i++ ) M_free(d->iblocks[i],"index blocks of new database");
00707         goto getout;
00708     }
00709     if ( i > 0 ) d->nblocks[i]->previousblock = d->nblocks[i-1]->position;
00710     else d->nblocks[i]->previousblock = -1;
00711     d->nblocks[i]->position = ftell(f);
00712     s = d->nblocks[i]->names;
00713     for ( j = 0; j < NAMETABLESIZE; j++ ) *s++ = 0;
00714     convertnamesblock(d->nblocks[i],&scratchnamesblock,TODISK);
00715     if ( minoswrite(d->handle,(char *)(&scratchnamesblock),sizeof(NAMESBLOCK)) ) {
00716         MesPrint("Error while writing new names blocks\n");
00717         for ( i = 0; i < numnameblocks; i++ ) M_free(d->nblocks[i],"names blocks of new
database");
00718         for ( i = 0; i < numblocks; i++ ) M_free(d->iblocks[i],"index blocks of new database");
00719         goto getout;
00720     }
00721 }
00722 d->info.firstindexblock = d->iblocks[0]->position;
00723 d->info.lastindexblock = d->iblocks[numblocks-1]->position;
00724 d->info.firstnameblock = d->nblocks[0]->position;
00725 d->info.lastnameblock = d->nblocks[numnameblocks-1]->position;
00726 if ( WriteIniInfo(d) ) {
00727     for ( i = 0; i < numnameblocks; i++ ) M_free(d->nblocks[i],"names blocks of new database");
00728     for ( i = 0; i < numblocks; i++ ) M_free(d->iblocks[i],"index blocks of new database");
00729     goto getout;
00730 }
00731 return(d);
00732 }
00733
00734 /*
00735     #] NewDbase :
00736     #[ FreeTableBase :
00737 */
00738
00739 void FreeTableBase(DBASE *d)
00740 {
00741     int i, j, *old, *newL;
00742     LIST *L;
00743     for ( i = 0; i < d->info.numberofnamesblocks; i++ ) M_free(d->nblocks[i],"nblocks[i]");
00744     for ( i = 0; i < d->info.numberofindexblocks; i++ ) M_free(d->iblocks[i],"iblocks[i]");
00745     M_free(d->nblocks,"nblocks");
00746     M_free(d->iblocks,"iblocks");
00747     if ( d->tablenames ) M_free(d->tablenames,"d->tablenames");
00748     if ( d->name ) M_free(d->name,"d->name");
00749     if ( d->fullname ) M_free(d->fullname,"d->fullname");
00750     i = d - tablebases;
00751     if ( i < ( NumTableBases - 1 ) ) {
00752         L = &(AC.TableBaseList);
00753         j = ( ( NumTableBases - i - 1 ) * L->size ) / sizeof(int);
00754         old = (int *)d; newL = (int *) (d+1);
00755         while ( --j >= 0 ) *newL++ = *old++;
00756         j = L->size / sizeof(int);
00757         while ( --j >= 0 ) *newL++ = 0;
00758     }
00759     NumTableBases--;
00760     M_free(d,"tb,d");
00761 }
00762
00763 /*
00764     #] FreeTableBase :
00765     #[ ComposeTableNames :
00766

```

```

00767         The nameblocks are supposed to be in memory.
00768         Hence we have to go through them
00769 */
00770
00771 int ComposeTableNames(DBASE *d)
00772 {
00773     MLONG nsize = 0;
00774     int i, j, k;
00775     char *s, *t, *ss;
00776     d->topnumber = 0;
00777     i = 0; s = d->nblocks[i]->names; j = NAMETABLESIZE;
00778     while ( *s ) {
00779         if ( *s ) d->topnumber++;
00780         for ( k = 0; k < 2; k++ ) { /* name and argtail */
00781             while ( *s ) {
00782                 j--;
00783                 if ( j <= 0 ) {
00784                     i++; if ( i >= d->info.numberofnamesblocks ) goto gotall;
00785                     s = d->nblocks[i]->names; j = NAMETABLESIZE;
00786                 }
00787                 else s++;
00788             }
00789             j--;
00790             if ( j <= 0 ) {
00791                 i++; if ( i >= d->info.numberofnamesblocks ) goto gotall;
00792                 s = d->nblocks[i]->names; j = NAMETABLESIZE;
00793             }
00794             else s++;
00795         }
00796     }
00797 gotall:;
00798     nsize = (d->info.numberofnamesblocks-1)*NAMETABLESIZE +
00799             (s-d->nblocks[i]->names)+1;
00800     if ( ( d->tablenames = (char *)Malloc1((2*nsize+30)*sizeof(char),"tablenames") )
00801         == 0 ) { return(-1); }
00802     t = d->tablenames;
00803     d->tablenamessize = 2*nsize+30;
00804     d->tablenamefill = nsize-1;
00805     for ( k = 0; k < i; k++ ) {
00806         ss = d->nblocks[k]->names;
00807         for ( j = 0; j < NAMETABLESIZE; j++ ) *t++ = *ss++;
00808     }
00809     ss = d->nblocks[i]->names;
00810     while ( ss < s ) *t++ = *ss++;
00811     *t = 0;
00812     return(0);
00813 }
00814
00815 /*
00816 #] ComposeTableNames :
00817 #[ OpenDbase :
00818 */
00819
00820 DBASE *OpenDbase(char *filename)
00821 {
00822     FILE *f;
00823     DBASE *d;
00824     char *newname;
00825     if ( ( f = LocateBase(&filename,&newname,"r+b") ) == 0 ) {
00826         MesPrint("Cannot open file %s\n",filename);
00827         return(0);
00828     }
00829     /* setbuf(f,0); */
00830     d = (DBASE *)From0List(&(AC.TableBaseList));
00831     d->name = filename; /* For the moment just for the error messages */
00832     d->handle = f;
00833     if ( ReadIniInfo(d) || ReadIndex(d) ) { M_free(d,"OpenDbase"); fclose(f); return(0); }
00834     if ( ComposeTableNames(d) ) {
00835         FreeTableBase(d);
00836         fclose(f);
00837         return(0);
00838     }
00839     d->name = str_dup(filename);
00840     d->fullname = newname;
00841     return(d);
00842 }
00843
00844 /*
00845 #] OpenDbase :
00846 #[ AddTableName :
00847
00848 Adds a name of a table. Writes the namelist to disk.
00849 Returns the number of this tablename in the database.
00850 If the name was already in the table we return its value in negative.
00851 Zero is an error!
00852 */
00853

```



```

00854 MLONG AddTableName(DBASE *d,char *name, TABLES T)
00855 {
00856     char *s, *t, *tt;
00857     int namesize, tailsizes;
00858     MLONG newsize, i, num;
00859 /*
00860     First search for the name in what we have already
00861 */
00862     if ( d->tablenames ) {
00863         num = 0;
00864         s = d->tablenames;
00865         while ( *s ) {
00866             num++;
00867             t = name;
00868             while ( ( *s == *t ) && *t ) { s++; t++; }
00869             if ( *s == *t ) { return(-num); }
00870             while ( *s ) s++;
00871             s++;
00872             while ( *s ) s++;
00873             s++;
00874         }
00875     }
00876 /*
00877     This name has to be added
00878 */
00879     MesPrint("We add the name %s\n",name);
00880     t = name;
00881     while ( *t ) { t++; }
00882     namesize = t-name;
00883     if ( ( t = (char *) (T->argtail) ) != 0 ) {
00884         while ( *t ) { t++; }
00885         tailsizes = t - (char *) (T->argtail);
00886     }
00887     else { tailsizes = 0; }
00888     if ( d->tablenames == 0 ) {
00889         if ( ComposeTableNames(d) ) {
00890             FreeTableBase(d);
00891             M_free(d,"AddTableName");
00892             return(0);
00893         }
00894     }
00895     d->info.numberoftables++;
00896     while ( ( d->tablenamefill+namesize+tailsizes+3 > d->tablenamessize )
00897         || ( d->tablenames == 0 ) ) {
00898         newsize = 2*d->tablenamessize + 2*namesize + 2*tailsizes + 6;
00899         if ( ( t = (char *) Malloc1(newsize*sizeof(char),"AddTableName") ) == 0 )
00900             return(0);
00901         tt = t;
00902         if ( d->tablenames ) {
00903             s = d->tablenames;
00904             for ( i = 0; i < d->tablenamefill; i++ ) *t++ = *s++;
00905             *t = 0;
00906             M_free(d->tablenames,"d->tablenames");
00907         }
00908         d->tablenames = tt;
00909         d->tablenamessize = newsize;
00910     }
00911     s = d->tablenames + d->tablenamefill;
00912     t = name;
00913     while ( *t ) *s++ = *t++;
00914     *s++ = 0;
00915     t = (char *) (T->argtail);
00916     while ( *t ) *s++ = *t++;
00917     *s++ = 0;
00918     *s = 0;
00919     d->tablenamefill = s - d->tablenames;
00920     d->topnumber++;
00921 /*
00922     Now we have to synchronize
00923 */
00924     if ( PutTableNames(d) ) return(0);
00925     return(d->topnumber);
00926 }
00927
00928 /*
00929     #] AddTableName :
00930     #[ GetTableName :
00931
00932     Gets a name of a table.
00933     Returns the number of this tablename in the database.
00934     Zero -> error
00935 */
00936
00937 MLONG GetTableName(DBASE *d,char *name)
00938 {
00939     char *s, *t;
00940     MLONG num;

```

```

00941 /*
00942     search for the name in what we have
00943 */
00944     if ( d->tablenames ) {
00945         num = 0;
00946         s = d->tablenames;
00947         while ( *s ) {
00948             num++;
00949             t = name;
00950             while ( ( *s == *t ) && *t ) { s++; t++; }
00951             if ( *s == *t ) { return(num); }
00952             while ( *s ) s++;
00953             s++;
00954             while ( *s ) s++;
00955             s++;
00956         }
00957     }
00958     return(0);
00959 }
00960
00961 /*
00962     #] GetTableName :
00963     #[ PutTableNames :
00964
00965     Takes the names string in d->tablenames and puts it in the nblocks
00966     pieces. Writes what has been changed to disk.
00967 */
00968
00969 int PutTableNames(DBASE *d)
00970 {
00971     NAMESBLOCK **nnew;
00972     int i, j, firstdif;
00973     MLONG m;
00974     char *s, *t;
00975
00976     /* Determine how many blocks are needed.
00977     */
00978     MLONG numblocks = d->tablenamefill/NAMETABLESIZE + 1;
00979     if ( d->info.numberofnamesblocks < numblocks ) {
00980         /*
00981             We need more blocks. First make sure of the space for nblocks.
00982         */
00983         if ( ( nnew = (NAMESBLOCK **)Malloc1(sizeof(NAMESBLOCK *)*numblocks,
00984             "new names block" ) ) == 0 ) {
00985             return(-1);
00986         }
00987         for ( i = 0; i < d->info.numberofnamesblocks; i++ ) {
00988             nnew[i] = d->nblocks[i];
00989         }
00990         free(d->nblocks);
00991         d->nblocks = nnew;
00992         for ( ; i < numblocks; i++ ) {
00993             if ( ( d->nblocks[i] = (NAMESBLOCK *)Malloc1(sizeof(NAMESBLOCK),
00994                 "additional names blocks " ) ) == 0 ) {
00995                 FreeTableBase(d);
00996                 return(-1);
00997             }
00998             d->nblocks[i]->previousblock = -1;
00999             d->nblocks[i]->position = -1;
01000             s = d->nblocks[i]->names;
01001             for ( j = 0; j < NAMETABLESIZE; j++ ) *s++ = 0;
01002         }
01003         d->info.numberofnamesblocks = numblocks;
01004     }
01005
01006     /* Now look till where the new contents agree with the old.
01007     */
01008     firstdif = 0;
01009     i = 0; t = d->nblocks[i]->names; j = 0; s = d->tablenames;
01010     for ( m = 0; m < d->tablenamefill; m++ ) {
01011         if ( *s == *t ) {
01012             s++; t++; j++;
01013             if ( j >= NAMETABLESIZE ) {
01014                 i++;
01015                 t = d->nblocks[i]->names;
01016                 j = 0;
01017             }
01018         }
01019         else {
01020             firstdif = i;
01021             for ( ; m < d->tablenamefill; m++ ) {
01022                 *t++ = *s++; j++;
01023                 if ( j >= NAMETABLESIZE ) {
01024                     i++;
01025                     t = d->nblocks[i]->names;
01026                     j = 0;
01027                 }

```

```

01028         }
01029         *t = 0;
01030         break;
01031     }
01032 }
01033 for ( i = 0; i < d->info.numberofnamesblocks; i++ ) {
01034     if ( i == firstdif ) break;
01035     if ( d->nblocks[i]->position < 0 ) { firstdif = i; break; }
01036 }
01037 /*
01038 Now we have to (re)write the blocks, starting at firstdif.
01039 */
01040 for ( i = firstdif; i < d->info.numberofnamesblocks; i++ ) {
01041     if ( i > 0 ) d->nblocks[i]->previousblock = d->nblocks[i-1]->position;
01042     else d->nblocks[i]->previousblock = -1;
01043     if ( d->nblocks[i]->position < 0 ) {
01044         fseek(d->handle,0,SEEK_END);
01045         d->nblocks[i]->position = ftell(d->handle);
01046     }
01047     else fseek(d->handle,d->nblocks[i]->position,SEEK_SET);
01048     convertnamesblock(d->nblocks[i],&scratchnamesblock,TODISK);
01049     if ( minoswrite(d->handle,(char *)(&scratchnamesblock),sizeof(NAMESBLOCK)) ) {
01050         MesPrint("Error while writing names blocks\n");
01051         FreeTableBase(d);
01052         return(-1);
01053     }
01054 }
01055 d->info.lastnameblock = d->nblocks[d->info.numberofnamesblocks-1]->position;
01056 d->info.firstnameblock = d->nblocks[0]->position;
01057 return(WriteIniInfo(d));
01058 }
01059 /*
01060 #] PutTableNames :
01061 #[ AddToIndex :
01062 */
01063 */
01064
01065 int AddToIndex(DBASE *d,MLONG number)
01066 {
01067     MLONG i, oldnumofindexblocks = d->info.numberofindexblocks;
01068     MLONG j, newnumofindexblocks, jj;
01069     INDEXBLOCK **ib;
01070     MLONG t = (MLONG)(time(0));
01071     if ( number == 0 ) return(0);
01072     else if ( number < 0 ) {
01073         if ( d->info.entriesinindex < -number ) {
01074             MesPrint("There are only %ld entries in the index of file %s\n",
01075                 d->info.entriesinindex,d->name);
01076             return(-1);
01077         }
01078         d->info.entriesinindex += number;
01079     dowrite:
01080         if ( WriteIniInfo(d) ) {
01081             d->info.entriesinindex -= number;
01082             MesPrint("File may be corrupted\n");
01083             return(-1);
01084         }
01085     }
01086     else if ( d->info.entriesinindex+number <=
01087         NUMOBJECTS*d->info.numberofindexblocks ) {
01088         d->info.entriesinindex += number;
01089         goto dowrite;
01090     }
01091     else {
01092         d->info.entriesinindex += number;
01093         newnumofindexblocks = d->info.numberofindexblocks + ((number -
01094             (NUMOBJECTS*d->info.numberofindexblocks - d->info.entriesinindex))
01095             +NUMOBJECTS-1)/NUMOBJECTS;
01096         if ( ( ib = (INDEXBLOCK **)Malloc1(sizeof(INDEXBLOCK *)*newnumofindexblocks,
01097             "index") ) == 0 ) return(-1);
01098         for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01099             ib[i] = d->iblocks[i];
01100         }
01101         for ( i = d->info.numberofindexblocks; i < newnumofindexblocks; i++ ) {
01102             if ( ( ib[i] = (INDEXBLOCK *)Malloc1(sizeof(INDEXBLOCK),"index block") ) == 0 ) {
01103                 FreeTableBase(d);
01104                 return(-1);
01105             }
01106             if ( i > 0 ) ib[i]->previousblock = ib[i-1]->position;
01107             else ib[i]->previousblock = -1;
01108         /*
01109         Zero things properly. We don't want garbage in the file.
01110         */
01111         for ( j = 0; j < NUMOBJECTS; j++ ) {
01112             ib[i]->objects[j].date = t;
01113             ib[i]->objects[j].size = 0;
01114             ib[i]->objects[j].position = -1;

```

```

01115         ib[i]->objects[j].tablenumber = 0;
01116         ib[i]->objects[j].uncompressed = 0;
01117         ib[i]->objects[j].spare1 = 0;
01118         ib[i]->objects[j].spare2 = 0;
01119         ib[i]->objects[j].spare3 = 0;
01120         for ( jj = 0; jj < ELEMENTSIZE; jj++ ) ib[i]->objects[j].element[jj] = 0;
01121     }
01122     fseek(d->handle,0,SEEK_END);
01123     ib[i]->position = ftell(d->handle);
01124     convertblock(ib[i],&scratchblock,TODISK);
01125     if ( minoswrite(d->handle,(char *)(&scratchblock),sizeof(INDEXBLOCK)) ) {
01126         MesPrint("Error while writing new index of file %s",d->name);
01127         FreeTableBase(d);
01128         return(-1);
01129     }
01130 }
01131 d->info.lastindexblock = ib[newnumofindexblocks-1]->position;
01132 d->info.firstindexblock = ib[0]->position;
01133 d->info.numberofindexblocks = newnumofindexblocks;
01134 if ( WriteIniInfo(d) ) {
01135     d->info.numberofindexblocks = oldnumofindexblocks;
01136     d->info.entriesinindex -= number;
01137     MesPrint("File may be corrupted\n");
01138     FreeTableBase(d);
01139     return(-1);
01140 }
01141 M_free(d->iblocks,"AddToIndex");
01142 d->iblocks = ib;
01143 }
01144 return(0);
01145 }
01146
01147 /*
01148 #] AddToIndex :
01149 #[ AddObject :
01150 */
01151
01152 MLONG AddObject(DBASE *d,MLONG tablenumber,char *arguments,char *rhs)
01153 {
01154     MLONG number;
01155     number = d->info.entriesinindex;
01156     if ( AddToIndex(d,1) ) return(-1);
01157     if ( WriteObject(d,tablenumber,arguments,rhs,number) ) return(-1);
01158     return(number);
01159 }
01160
01161 /*
01162 #] AddObject :
01163 #[ FindTableNumber :
01164 */
01165
01166 MLONG FindTableNumber(DBASE *d,char *name)
01167 {
01168     char *s = d->tablenames, *t, *ss;
01169     MLONG num = 0;
01170     ss = d->tablenames + d->tablenamefill;
01171     while ( s < ss ) {
01172         num++;
01173         t = name;
01174         while ( *s == *t && *t ) {
01175             s++; t++;
01176         }
01177         if ( *s == 0 && *t == 0 ) return(num);
01178         while ( *s ) s++;
01179         s++;
01180     }
01181     /* Skip also the argument tail */
01182     while ( *s ) s++;
01183     s++;
01184 }
01185 return(-1); /* Name not found */
01186 }
01187 }
01188
01189 /*
01190 #] FindTableNumber :
01191 #[ WriteObject :
01192 */
01193
01194 int WriteObject(DBASE *d,MLONG tablenumber,char *arguments,char *rhs,MLONG number)
01195 {
01196     char *s, *a;
01197 #ifdef WITHZLIB
01198     char *buffer = 0;
01199     uLongf newsize = 0, oldsize = 0;
01200     uLong ssize;
01201     int error = 0;

```

```

01202 #endif
01203     MLONG i, j, position, size, n;
01204     OBJECTS *obj;
01205     if ( ( d->mode & INPUTONLY ) == INPUTONLY ) {
01206         MesPrint("Not allowed to write to input\n");
01207         return(-1);
01208     }
01209     if ( number >= d->info.entriesinindex ) {
01210         MesPrint("Reference to non-existing object number %ld\n",number+1);
01211         return(0);
01212     }
01213     j = number/NUMOBJECTS;
01214     i = number%NUMOBJECTS;
01215     obj = &(d->iblocks[j]->objects[i]);
01216     a = arguments;
01217     while ( *a ) a++;
01218     a++; n = a - arguments;
01219     if ( n > ELEMENTSIZE ) {
01220         MesPrint("Table element %s has more than %ld characters.\n",arguments,
01221             (MLONG)ELEMENTSIZE);
01222         return(-1);
01223     }
01224     s = obj->element;
01225     a = arguments;
01226     while ( *a ) *s++ = *a++;
01227     *s++ = 0;
01228     while ( n < ELEMENTSIZE ) { *s++ = 0; n++; }
01229     obj->spare1 = obj->spare2 = obj->spare3 = 0;
01230
01231     fseek(d->handle,0,SEEK_END);
01232     position = ftell(d->handle);
01233     s = rhs;
01234     while ( *s ) s++;
01235     s++;
01236     size = s - rhs;
01237 #ifdef WITHZLIB
01238     if ( ( d->mode & NOCOMPRESS ) == 0 ) {
01239         newsize = size + size/1000 + 20;
01240         if ( ( buffer = (char *)Malloca(newsize*sizeof(char),"compress buffer") )
01241             == 0 ) {
01242             MesPrint("No compress used for element %s in file %s\n",arguments,d->name);
01243         }
01244     }
01245     else buffer = 0;
01246     if ( buffer ) {
01247         ssize = size;
01248 #ifdef WITHZSTD
01249         // Force the use of zlib for compressed Tablebase entries, so that tablebases created
01250         // with zstd-supported FORM builds can be used by zstd-unsupported FORM builds.
01251         const int old_isUsingZSTDcompression = ZWRAP_isUsingZSTDcompression();
01252         ZWRAP_useZSTDcompression(0);
01253 #endif
01254         if ( ( error = compress((Bytef *)buffer,&newsize,(Bytef *)rhs,ssize) ) != Z_OK ) {
01255             MesPrint("Error = %d\n",error);
01256             MesPrint("Due to error no compress used for element %s in file %s\n",arguments,d->name);
01257             M_free(buffer,"tb,WriteObject");
01258             buffer = 0;
01259         }
01260 #ifdef WITHZSTD
01261         ZWRAP_useZSTDcompression(old_isUsingZSTDcompression);
01262 #endif
01263     }
01264     if ( buffer ) {
01265         rhs = buffer;
01266         oldsize = size;
01267         size = newsize;
01268     }
01269 #endif
01270     if ( minoswrite(d->handle,rhs,size) ) {
01271         MesPrint("Error while writing rhs\n");
01272         return(-1);
01273     }
01274     obj->position = position;
01275     obj->size = size;
01276     obj->date = (MLONG)(time(0));
01277     obj->tablename = tablename;
01278 #ifdef WITHZLIB
01279     obj->uncompressed = oldsize;
01280     if ( buffer ) M_free(buffer,"tb,WriteObject");
01281 #else
01282     obj->uncompressed = 0;
01283 #endif
01284     return(WriteIndexBlock(d,j));
01285 }
01286
01287 /*
01288 #] WriteObject :

```

```

01289     #[ ReadObject :
01290
01291     Returns a pointer to the proper rhs
01292 */
01293
01294 char *ReadObject(DBASE *d,MLONG tablenumber,char *arguments)
01295 {
01296     OBJECTS *obj;
01297     MLONG i, j;
01298     char *buffer1, *s, *t;
01299 #ifdef WITHZLIB
01300     char *buffer2 = 0;
01301     uLongf finallength = 0;
01302 #endif
01303     if ( tablenumber > d->topnumber ) {
01304         MesPrint("Reference to non-existing table number in tablebase %s: %ld\n",
01305             d->name,tablenumber);
01306         return(0);
01307     }
01308 /*
01309     Start looking for the object
01310 */
01311     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01312         for ( j = 0; j < NUMOBJECTS; j++ ) {
01313             if ( d->iblocks[i]->objects[j].tablenumber != tablenumber ) continue;
01314             s = arguments; t = d->iblocks[i]->objects[j].element;
01315             while ( *s == *t && *s ) { s++; t++; }
01316             if ( *t == 0 && *s == 0 ) goto foundelement;
01317         }
01318     }
01319     s = d->tablenames; i = 1;
01320     while ( *s ) {
01321         if ( i == tablenumber ) break;
01322         while ( *s ) s++;
01323         s++;
01324         while ( *s ) s++;
01325         s++;
01326         i++;
01327     }
01328     MesPrint("%s(%s) not found in tablebase %s\n",s,arguments,d->name);
01329     return(0);
01330
01331 foundelement:;
01332     obj = &(d->iblocks[i]->objects[j]);
01333     fseek(d->handle,obj->position,SEEK_SET);
01334     if ( ( buffer1 = (char *)Malloc1(obj->size,"reading rhs buffer1") ) == 0 ) {
01335         return(0);
01336     }
01337 #ifdef WITHZLIB
01338     if ( obj->uncompressed > 0 ) {
01339         if ( ( buffer2 = (char *)Malloc1(obj->uncompressed,"reading rhs buffer2") ) == 0 ) {
01340             return(0);
01341         }
01342     }
01343     else buffer2 = 0;
01344 #endif
01345     if ( minosread(d->handle,buffer1,obj->size) ) {
01346         MesPrint("Could not read rhs %s in file %s\n",arguments,d->name);
01347         M_free(buffer1,"tb,ReadObject");
01348 #ifdef WITHZLIB
01349         if ( buffer2 ) M_free(buffer2,"tb,ReadObject");
01350 #endif
01351         return(0);
01352     }
01353 #ifdef WITHZLIB
01354     if ( buffer2 == 0 ) return(buffer1);
01355     finallength = obj->uncompressed;
01356     if ( uncompress(Bytef *)buffer2,&finallength,(Bytef *)buffer1,obj->size) != Z_OK ) {
01357         MesPrint("Cannot uncompress element %s in file %s\n",arguments,d->name);
01358         M_free(buffer1,"tb,ReadObject"); M_free(buffer2,"tb,ReadObject");
01359         return(0);
01360     }
01361     M_free(buffer1,"tb,ReadObject");
01362     return(buffer2);
01363 #else
01364     return(buffer1);
01365 #endif
01366 }
01367
01368 /*
01369     #] ReadObject :
01370     #[ ReadijObject :
01371
01372     Returns a pointer to the proper rhs
01373 */
01374
01375 char *ReadijObject(DBASE *d,MLONG i,MLONG j,char *arguments)

```

```

01376 {
01377     OBJECTS *obj;
01378     char *buffer1;
01379 #ifdef WITHZLIB
01380     char *buffer2 = 0;
01381     uLongf finallength = 0;
01382 #endif
01383     obj = &(d->iblocks[i]->objects[j]);
01384     fseek(d->handle,obj->position,SEEK_SET);
01385     if ( ( buffer1 = (char *)Malloca(obj->size,"reading rhs buffer1") ) == 0 ) {
01386         return(0);
01387     }
01388 #ifdef WITHZLIB
01389     if ( obj->uncompressed > 0 ) {
01390         if ( ( buffer2 = (char *)Malloca(obj->uncompressed,"reading rhs buffer2") ) == 0 ) {
01391             return(0);
01392         }
01393     }
01394     else buffer2 = 0;
01395 #endif
01396     if ( minosread(d->handle,buffer1,obj->size) ) {
01397         MesPrint("Could not read rhs %s in file %s\n",arguments,d->name);
01398         if ( buffer1 ) M_free(buffer1,"rhs buffer1");
01399 #ifdef WITHZLIB
01400         if ( buffer2 ) M_free(buffer2,"rhs buffer2");
01401 #endif
01402         return(0);
01403     }
01404 #ifdef WITHZLIB
01405     if ( buffer2 == 0 ) return(buffer1);
01406     finallength = obj->uncompressed;
01407     if ( uncompress((Bytef *)buffer2,&finallength,(Bytef *)buffer1,obj->size) != Z_OK ) {
01408         MesPrint("Cannot uncompress element %s in file %s\n",arguments,d->name);
01409         if ( buffer1 ) M_free(buffer1,"rhs buffer1");
01410         if ( buffer2 ) M_free(buffer2,"rhs buffer2");
01411         return(0);
01412     }
01413     M_free(buffer1,"rhs buffer1");
01414     return(buffer2);
01415 #else
01416     return(buffer1);
01417 #endif
01418 }
01419
01420 /*
01421  #] ReadijObject :
01422  #[ ExistsObject :
01423
01424  Returns 1 if Object exists
01425 */
01426
01427 int ExistsObject(DBASE *d,MLONG tablenumber,char *arguments)
01428 {
01429     MLONG i, j;
01430     char *s, *t;
01431     if ( tablenumber > d->topnumber ) {
01432         MesPrint("Reference to non-existing table number in tablebase %s: %ld\n",
01433             d->name,tablenumber);
01434         return(0);
01435     }
01436     /*
01437     Start looking for the object
01438     */
01439     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01440         for ( j = 0; j < NUMOBJECTS; j++ ) {
01441             if ( d->iblocks[i]->objects[j].tablenumber != tablenumber ) continue;
01442             s = arguments; t = d->iblocks[i]->objects[j].element;
01443             while ( *s == *t && *s ) { s++; t++; }
01444             if ( *t == 0 && *s == 0 ) return(1);
01445         }
01446     }
01447     return(0);
01448 }
01449
01450 /*
01451  #] ExistsObject :
01452  #[ DeleteObject :
01453
01454  Returns 1 if Object has been deleted.
01455  We leave a hole. Actually the object is still there but has been
01456  inactivated. It can be reactivated by calling this routine again.
01457 */
01458
01459 int DeleteObject(DBASE *d,MLONG tablenumber,char *arguments)
01460 {
01461     MLONG i, j;
01462     char *s, *t;

```

```

01463     if ( tablenumber > d->topnumber ) {
01464         MesPrint("Reference to non-existing table number in tablebase %s: %ld\n",
01465             d->name,tablenumber);
01466         return(0);
01467     }
01468     /*
01469     Start looking for the object
01470     */
01471     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01472         for ( j = 0; j < NUMOBJECTS; j++ ) {
01473             if ( d->iblocks[i]->objects[j].tablenumber != tablenumber ) continue;
01474             s = arguments; t = d->iblocks[i]->objects[j].element;
01475             while ( *s == *t && *s ) { s++; t++; }
01476             if ( *t == 0 && *s == 0 ) {
01477                 d->iblocks[i]->objects[j].tablenumber =
01478                     -d->iblocks[i]->objects[j].tablenumber - 1;
01479                 return(1);
01480             }
01481         }
01482     }
01483     return(0);
01484 }
01485
01486 /*
01487 #] DeleteObject :
01488 */

```


4.75 minos.h File Reference

```

#include <stdio.h>
#include <stdlib.h>
#include <ctype.h>
#include <string.h>
#include <time.h>

```

Include dependency graph for minos.h:

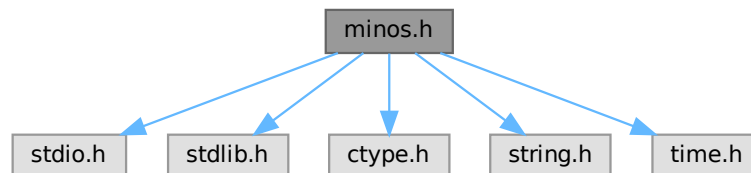

This graph shows which files directly or indirectly include this file:



Data Structures

- struct [iniinfo](#)
- struct [objects](#)
- struct [indexblock](#)
- struct [nameblock](#)
- struct [dbase](#)

Macros

- `#define TODISK 0`
- `#define FROMDISK 1`
- `#define MDIRTYFLAG 1`
- `#define MCLEANFLAG (~MDIRTYFLAG)`
- `#define INANDOUT 0`
- `#define INPUTONLY 1`
- `#define OUTPUTONLY 2`
- `#define NOCOMPRESS 4`

Typedefs

- `typedef struct iniinfo INIINFO`
- `typedef struct objects OBJECTS`
- `typedef struct indexblock INDEXBLOCK`
- `typedef struct nameblock NAMESBLOCK`
- `typedef struct dbase DBASE`

Functions

- `int minosread (FILE *f, char *buffer, MLONG size)`
- `int minoswrite (FILE *f, char *buffer, MLONG size)`

Variables

- `int withoutflush`

4.75.1 Detailed Description

Contains all needed declarations and definitions for the tablebase low level file routines. These have been taken from the minos database system and modified somewhat.

!!!CAUTION!!! Changes in this file will most likely have consequences for the recovery mechanism (see [checkpoint.c](#)). You need to care for the code in [checkpoint.c](#) as well and modify the code there accordingly!

Definition in file [minos.h](#).

4.75.2 Macro Definition Documentation

4.75.2.1 TODISK

```
#define TODISK 0
```

Definition at line 145 of file [minos.h](#).

4.75.2.2 FROMDISK

```
#define FROMDISK 1
```

Definition at line 146 of file [minos.h](#).

4.75.2.3 MDIRTYFLAG

```
#define MDIRTYFLAG 1
```

Definition at line 147 of file [minos.h](#).

4.75.2.4 MCLEANFLAG

```
#define MCLEANFLAG (~MDIRTYFLAG)
```

Definition at line 148 of file [minos.h](#).

4.75.2.5 INANDOUT

```
#define INANDOUT 0
```

Definition at line 149 of file [minos.h](#).

4.75.2.6 INPUTONLY

```
#define INPUTONLY 1
```

Definition at line 150 of file [minos.h](#).

4.75.2.7 OUTPUTONLY

```
#define OUTPUTONLY 2
```

Definition at line 151 of file [minos.h](#).

4.75.2.8 NOCOMPRESS

```
#define NOCOMPRESS 4
```

Definition at line 152 of file [minos.h](#).

4.75.3 Function Documentation

4.75.3.1 minosread()

```
int minosread (
    FILE * f,
    char * buffer,
    MLONG size )
```

Definition at line 66 of file [minos.c](#).

4.75.3.2 minoswrite()

```
int minoswrite (
    FILE * f,
    char * buffer,
    MLONG size )
```

Definition at line 83 of file [minos.c](#).

4.75.4 Variable Documentation

4.75.4.1 withoutflush

```
int withoutflush [extern]
```

Definition at line 45 of file [minos.c](#).

4.76 minos.h

[Go to the documentation of this file.](#)

```
00001 #ifndef __MANAGE_H__
00002
00003 #define __MANAGE_H__
00004
00017 /* # [ License : */
00018 /*
00019 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00020 * When using this file you are requested to refer to the publication
00021 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00022 * This is considered a matter of courtesy as the development was paid
00023 * for by FOM the Dutch physics granting agency and we would like to
00024 * be able to track its scientific use to convince FOM of its value
00025 * for the community.
00026 *
00027 * This file is part of FORM.
00028 *
00029 * FORM is free software: you can redistribute it and/or modify it under the
00030 * terms of the GNU General Public License as published by the Free Software
00031 * Foundation, either version 3 of the License, or (at your option) any later
00032 * version.
00033 *
00034 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00035 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00036 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00037 * details.
00038 *
00039 * You should have received a copy of the GNU General Public License along
00040 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00041 */
```

```

00042 /* #] License : */
00043
00044 #include <stdio.h>
00045 #include <stdlib.h>
00046 #include <ctype.h>
00047 #include <string.h>
00048 #include <time.h>
00049
00050 /*
00051     The following typedef has been moved to form3.h where all the sizes
00052     are defined for the various memory models.
00053     We want MLONG to have a more or less fixed size.
00054     In form3.h we try to fix it at 8 bytes.
00055     This should make files exchangeable
00056     between various 32-bits and 64-bits systems. At 4 bytes it might have
00057     problems with files of more than 2 Gbytes.
00058 */
00059 typedef long MLONG;
00060 */
00061
00062 #if BITSINWORD == 32
00063     #define NUMOBJECTS 1024
00064     #define MAXINDEXSIZE 1000000000L
00065     #define NAMETABLESIZE 1008
00066     #define ELEMENTSIZE 256
00067 #elif BITSINWORD == 16
00068     #define NUMOBJECTS 100
00069     #define MAXINDEXSIZE 33000000L
00070     #define NAMETABLESIZE 1008
00071     #define ELEMENTSIZE 128
00072 #else
00073     #error Only 64-bit and 32-bit platforms are supported.
00074 #endif
00075
00076
00077 int minosread(FILE *f, char *buffer, MLONG size);
00078 int minoswrite(FILE *f, char *buffer, MLONG size);
00079
00080 /*
00081     ELEMENTSIZE should make a nice number of sizeof(OBJECTS)
00082     Usually this will be much too much, but there are cases.....
00083 */
00084
00085 typedef struct iniinfo {
00086     /* should contains only MLONG variables or convertiniinfo should be modified */
00087     MLONG     entriesinindex;
00088     MLONG     numberofindexblocks;
00089     MLONG     firstindexblock;
00090     MLONG     lastindexblock;
00091     MLONG     numberoftables;
00092     MLONG     numberofnamesblocks;
00093     MLONG     firstnameblock;
00094     MLONG     lastnameblock;
00095 } INIINFO;
00096
00097 typedef struct objects {
00098     /* if any changes, convertblock should be adapted too!!!! */
00099     MLONG position;           /* position of RHS= */
00100     MLONG size;              /* size on disk (could be compressed) */
00101     MLONG date;              /* Time stamp */
00102     MLONG tablenumber;        /* Number of table. Refers to name in special index */
00103     MLONG uncompressed;      /* uncompressed size if compressed. If not: 0 */
00104     MLONG spare1;
00105     MLONG spare2;
00106     MLONG spare3;
00107     char element[ELEMENTSIZE]; /* table element in character form */
00108 } OBJECTS;
00109
00110 typedef struct indexblock {
00111     MLONG flags;
00112     MLONG previousblock;
00113     MLONG position;
00114     OBJECTS objects[NUMOBJECTS];
00115 } INDEXBLOCK;
00116
00117 typedef struct nameblock {
00118     MLONG previousblock;
00119     MLONG position;
00120     char names[NAMETABLESIZE];
00121 } NAMESBLOCK;
00122
00123 typedef struct dbase {
00124     INIINFO info;
00125     MLONG mode;
00126     MLONG tablenamessize;
00127     MLONG topnumber;
00128     MLONG tablenameefill;

```

```


00129     MLONG         rwmode;
00130     INDEXBLOCK    **iblocks;
00131     NAMESBLOCK    **nblocks;
00132     FILE          *handle;
00133     char          *name;
00134     char          *fullname;
00135     char          *tablenames;
00136 } DBASE;
00137
00138 /*
00139 typedef int (*SFUN)(char *);
00140 typedef struct compile {
00141     char *keyword;
00142     SFUN func;
00143 } MCFUNCTION;
00144 */
00145 #define TODISK 0
00146 #define FROMDISK 1
00147 #define MDIRTYFLAG 1
00148 #define MCLEANFLAG (~MDIRTYFLAG)
00149 #define INANDOUT 0
00150 #define INPUTONLY 1
00151 #define OUTPUTONLY 2
00152 #define NOCOMPRESS 4
00153
00154 extern int withoutflush;
00155
00156 #endif

```

4.77 model.c File Reference

```
#include "form3.h"
```

Include dependency graph for model.c:

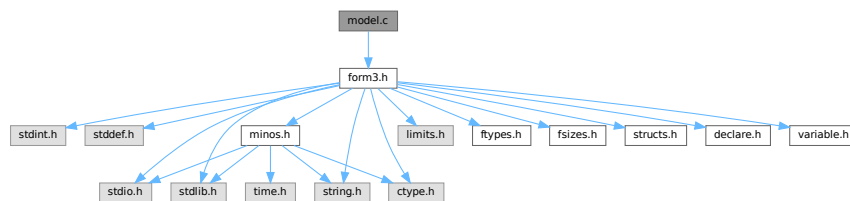

Functions

- [VERTEX](#) * [CreateVertex](#) ([MODEL](#) *m)
- [UBYTE](#) * [ReadParticle](#) ([UBYTE](#) *s, [VERTEX](#) *v, [MODEL](#) *m, int par)
- int [CoModel](#) ([UBYTE](#) *s)
- int [CoParticle](#) ([UBYTE](#) *s)
- int [CoVertex](#) ([UBYTE](#) *s)
- int [CoEndModel](#) ([UBYTE](#) *s)

4.77.1 Detailed Description

Implementation of "Model", required by the `diagrams_` function.

Definition in file [model.c](#).

4.77.2 Function Documentation

4.77.2.1 CreateVertex()

```
VERTEX * CreateVertex (
    MODEL * m )
```

Definition at line 76 of file [model.c](#).

4.77.2.2 ReadParticle()

```
UBYTE * ReadParticle (
    UBYTE * s,
    VERTEX * v,
    MODEL * m,
    int par )
```

Definition at line 106 of file [model.c](#).

4.77.2.3 CoModel()

```
int CoModel (
    UBYTE * s )
```

Definition at line 149 of file [model.c](#).

4.77.2.4 CoParticle()

```
int CoParticle (
    UBYTE * s )
```

Definition at line 224 of file [model.c](#).

4.77.2.5 CoVertex()

```
int CoVertex (
    UBYTE * s )
```

Definition at line 306 of file [model.c](#).

4.77.2.6 CoEndModel()

```
int CoEndModel (
    UBYTE * s )
```

Definition at line 409 of file [model.c](#).

4.78 model.c

[Go to the documentation of this file.](#)

```

00001
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 *   When using this file you are requested to refer to the publication
00009 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 *   This is considered a matter of courtesy as the development was paid
00011 *   for by FOM the Dutch physics granting agency and we would like to
00012 *   be able to track its scientific use to convince FOM of its value
00013 *   for the community.
00014 *
00015 *   This file is part of FORM.
00016 *
00017 *   FORM is free software: you can redistribute it and/or modify it under the
00018 *   terms of the GNU General Public License as published by the Free Software
00019 *   Foundation, either version 3 of the License, or (at your option) any later
00020 *   version.
00021 *
00022 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 *   details.
00026 *
00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[ License : */
00031 /*
00032 *   #[ Explanations :
00033 *
00034 *   This is a second generation much simplified version of model.c
00035 *   Syntax:
00036 *       Model QED;
00037 *           Particle electron,positron,-2;
00038 *           Particle photon,+3;
00039 *           Vertex electron,positron,photon: g;
00040 *       EndModel;
00041 *   or:
00042 *       Model QCD;
00043 *           Particle quark,antiquark,-2;
00044 *           Particle ghost,antighost,-1;
00045 *           Particle gluon,+3;
00046 *           Vertex quark,antiquark,gluon: g;
00047 *           Vertex qhost,antighost,gluon: g;
00048 *           Vertex gluon,gluon,gluon: g;
00049 *           Vertex gluon,gluon,gluon,gluon: g^2;
00050 *       EndModel;
00051 *   Remarks:
00052 *   1: if no second particle is given, a particle and its antiparticle are the same
00053 *   2: Spin statistics is by dimension of SU(2) representation with a sign.
00054 *   3: In a vertex we need to mention the coupling constants.
00055 *   4: Internally a particle gives a vertex with only two lines.
00056 *   5: All particles must have been declared before any vertex.
00057 *
00058 *   The diagrams should be provided as a collection of nodes and edges
00059 *   with momenta with a direction substituted. The other parameters (like
00060 *   Lorentz indices, color indices etc.) can then be provided in a procedure
00061 *   that should go with this mode definition.
00062 *   In principle the edges are not needed if there are no 'insertions', but
00063 *   because we would like to have the insertions as well we need the edges.
00064 *
00065 *   #[ Explanations :
00066 *   #[ Includes : model.c
00067 */
00068
00069 #include "form3.h"
00070
00071 /*
00072 *   #[ Includes :
00073 *   #[ CreateVertex :
00074 */
00075
00076 VERTEX *CreateVertex(MODEL *m)
00077 {
00078     VERTEX *v, **new;
00079     WORD newsize;
00080     int i;
00081     if ( m->invertices >= m->sizevertices ) {
00082         if ( m->sizevertices == 0 ) newsize = 20;
00083         else newsize = 2*m->sizevertices;
00084         new = (VERTEX **)Malloca1(newsize*sizeof(VERTEX *),"m->vertices");
00085         for ( i = 0; i < m->sizevertices; i++ ) new[i] = m->vertices[i];

```

```

00086         if ( m->sizevertices > 0 ) M_free(m->vertices,"m->vertices");
00087         m->vertices = new;
00088         m->sizevertices = newsize;
00089     }
00090     v = (VERTEX *)Malloc1(sizeof(VERTEX),"VERTEX");
00091     m->vertices[m->invertices++] = v;
00092     v->nparticles = 0;
00093     v->ncouplings = 0;
00094     v->type = 0;
00095     v->error = 0;
00096     v->externonly = 0;
00097     v->spare = 0;
00098     return(v);
00099 }
00100
00101 /*
00102 #] CreateVertex :
00103 #[ ReadParticle :
00104 */
00105
00106 UBYTE *ReadParticle(UBYTE *s, VERTEX *v, MODEL *m, int par)
00107 {
00108     UBYTE *name, c;
00109     PARTICLE *p = v->particles + v->nparticles++;
00110     WORD type, funnum;
00111     int i, j;
00112     SKIPBLANKS(s)
00113     name = s; s = SkipName(s); c = *s; *s = 0;
00114     if ( GetVar(name,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND ) {
00115         p->number = AddFunction(name,0,VERTEXFUNCTION,0,0,0,-1,-1) + FUNCTION;
00116     }
00117     else if ( par == 1 && type == CFUNCTION && functions[funnum].spec == VERTEXFUNCTION ) {
00118         p->number = funnum+FUNCTION;
00119     }
00120     else if ( par == 0 && type == CFUNCTION && functions[funnum].spec == VERTEXFUNCTION ) {
00121         /*
00122         We should check whether this particle exists already in this model.
00123         If so, this will be an error.
00124         */
00125         for ( i = 0; i < m->nparticles-1; i++ ) {
00126             for ( j = 0; j < m->vertices[i]->nparticles; j++ ) {
00127                 if ( m->vertices[i]->particles[j].number == funnum ) {
00128                     MesPrint("&Illegal attempt to redefine a particle in the same model: %s",name);
00129                     v->error = 1;
00130                 }
00131             }
00132         }
00133         p->number = funnum+FUNCTION;
00134     }
00135     else {
00136         MesPrint("&Name of particle previously declared as another variable: %s",name);
00137         v->error = 1;
00138     }
00139     *s = c;
00140     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00141     return(s);
00142 }
00143
00144 /*
00145 #] ReadParticle :
00146 #[ CoModel :
00147 */
00148
00149 int CoModel(UBYTE *s)
00150 {
00151     UBYTE *name, c;
00152     MODEL *m = (MODEL *)Malloc1(sizeof(MODEL),"Model");
00153     WORD numberofset, *e;
00154     SETS set;
00155     SKIPBLANKS(s)
00156     AC.ModelLevel++;
00157     int i;
00158     /*
00159     We now have to add the model to the list of models.
00160     */
00161     if ( AC.modelspace == 0 || AC.nummodels >= AC.modelspace ) {
00162         int newspace = 2*AC.modelspace+2, i;
00163         MODEL **models = (MODEL **)Malloc1((sizeof(MODEL *))*newspace,"AC.models");
00164         for ( i = 0; i < AC.modelspace; i++ ) models[i] = AC.models[i];
00165         if ( AC.models ) M_free(AC.models,"AC.models");
00166         AC.modelspace = newspace;
00167         AC.models = models;
00168     }
00169     AC.models[AC.nummodels++] = m;
00170
00171     m->vertices = 0;

```



```

00173     m->couplings = 0;
00174     m->nparticles = m->nvertices = m->sizevertices = m->invertices = 0;
00175     m->sizecouplings = 0;
00176     m->error = 0;
00177     m->grccmodel = NULL;
00178
00179     name = s;
00180     if ( FG.cTable[*s] == 0 ) {
00181         while ( FG.cTable[*s] <= 1 ) s++;
00182         c = *s; *s = 0;
00183         m->name = strdup1(name,"Model name");
00184         *s = c;
00185         SKIPBLANKS(s)
00186         if ( *s != 0 ) {
00187             MesPrint("&Illegal option in model statement: %s",s);
00188             return(1);
00189         }
00190     }
00191     else {
00192         m->name = strdup1((UBYTE *) "---", "Model name");
00193         m->error = 1;
00194         MesPrint("&Illegal name for model: %s",name);
00195         return(1);
00196     }
00197     /*
00198     Now make it a set with one element. The type of the set is rather special
00199     */
00200     if ( GetName(AC.varnames,m->name,&numberofset,NOAUTO) != NAMENOTFOUND ) {
00201         MesPrint("&Name conflict with name %s of model",m->name);
00202         return(1);
00203     }
00204     numberofset = AddSet(name,0);
00205     set = Sets + numberofset;
00206     set->type = CMODEL;
00207     e = (WORD *)FromVarList(&AC.SetElementList);
00208     *e = AC.nummodels-1;
00209     set->last++;
00210     AC.SetList.numtemp = AC.SetList.num;
00211     AC.SetElementList.numtemp = AC.SetElementList.num;
00212
00213     for ( i = 0; i <= MAXLEGS; i++ ) m->legcouple[i] = 0;
00214     m->legcouple[2] = 1;
00215
00216     return(0);
00217 }
00218
00219 /*
00220 #] CoModel :
00221 #[ CoParticle :
00222 */
00223
00224 int CoParticle(UBYTE *s)
00225 {
00226     MODEL *m;
00227     VERTEX *v;
00228     int i;
00229     if ( AC.nummodels <= 0 ) {
00230         MesPrint("&No open model for particle statement");
00231         return(1);
00232     }
00233     m = AC.models[AC.nummodels-1];
00234     if ( m->nvertices > 0 ) {
00235         MesPrint("&In a model description Particle statements should be before Vertex statements.");
00236         m->error = 1;
00237         return(1);
00238     }
00239     v = CreateVertex(m);
00240     m->nparticles++;
00241     s = ReadParticle(s,v,m,0);
00242     v->particles[0].type = 1;
00243     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00244     if ( v->error == 0 ) {
00245         if ( FG.cTable[*s] == 0 ) {
00246             s = ReadParticle(s,v,m,0);
00247             v->particles[1].type = -1;
00248             if ( v->particles[0].number == v->particles[1].number ) {
00249                 v->particles[0].type = 0;
00250                 v->particles[1].type = 0;
00251             }
00252         }
00253         else { /* Particle = antiparticle */
00254             v->particles[1] = v->particles[0];
00255             v->nparticles++;
00256             v->particles[0].type = 0;
00257             v->particles[1].type = 0;
00258         }
00259     }

```

```

00260     if ( v->error == 0 && ( *s == '+' || *s == '-' ) ) {
00261         int x = 0, sign = ( *s == '-' ) ? -1: 1;
00262         s++;
00263         while ( FG.cTable[*s] == 1 ) { x = 10*x + *s++ - '0'; }
00264         if ( x == 0 ) {
00265             v->error = 1;
00266             MesPrint("&Spin goes by dimension of SU(2) representation. Zero is not allowed.");
00267         }
00268         else { v->particles[0].spin = v->particles[1].spin = sign*x; }
00269         SKIPBLANKS(s)
00270     }
00271     else if ( v->error == 0 ) {
00272         v->particles[0].spin = v->particles[1].spin = 1;
00273         v->particles[0].type = 0;
00274         v->particles[1].type = 0;
00275     }
00276     /*
00277     Here will come future options
00278     */
00279     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00280     while ( v->error == 0 && *s != 0 && FG.cTable[*s] == 0 ) {
00281         UBYTE *opt = s, c;
00282         while ( FG.cTable[*s] == 0 ) s++;
00283         c = *s; *s = 0;
00284         if ( StrICont(opt, (UBYTE *) "external") == 0 ) { v->externonly = 1; }
00285         else {
00286             MesPrint("&Unrecognized option %s in particle statement.", opt);
00287             v->error = 1;
00288         }
00289         *s = c;
00290         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00291     }
00292     /*
00293     The couplings array will be used for registering in what kind of vertices the
00294     particle is involved. (example: in QCD the quarks only in 2 and 3-point vertices)
00295     */
00296     for ( i = 0; i < MAXPARTICLES; i++ ) v->couplings[i] = 0;
00297     v->couplings[2] = 1;
00298     return(v->error);
00299 }
00300
00301 /*
00302 #] CoParticle :
00303 #[ CoVertex :
00304 */
00305
00306 int CoVertex(UBYTE *s)
00307 {
00308     UBYTE *ss, *name, c;
00309     WORD type;
00310     MODEL *m;
00311     VERTEX *v;
00312     if ( AC.ModelLevel <= 0 ) {
00313         MesPrint("&No open model for vertex statement");
00314         return(1);
00315     }
00316     m = AC.models[AC.nummodels-1];
00317     /*
00318     Get an object of type VERTEX
00319     */
00320     v = CreateVertex(m);
00321     m->nvertices++;
00322     SKIPBLANKS(s);
00323     while ( *s && *s != ';' ) {
00324         if ( v->error == 0 ) {
00325             s = ReadParticle(s, v, m, 1);
00326             if ( v->error ) m->error = 1;
00327         }
00328         else {
00329             while ( *s && *s != ';' ) {
00330                 if ( *s == '[' ) { SKIPBRA1(s) }
00331                 else if ( *s == '(' ) { SKIPBRA3(s) }
00332                 else if ( *s == 0 ) {
00333                     v->error = 1;
00334                     MesPrint("&No coupling constant in vertex statement.");
00335                     break;
00336                 }
00337             }
00338             break;
00339         }
00340     }
00341     if ( v->error == 0 ) {
00342         if ( *s == ';' ) { /* read symbols and powers */
00343             s++; SKIPBLANKS(s);
00344             while ( *s ) {
00345                 if ( v->ncouplings >= 2*MAXCOUPLINGS ) {
00346                     MesPrint("&More than %d coupling constants in vertex.", (WORD)MAXCOUPLINGS);

```

```

00347         MesPrint("    Recompile with a larger value for MAXCOUPLINGS.");
00348         return(1);
00349     }
00350     ss = s; s = SkipName(s); c = *s; *s = 0; name = ConstructName(ss,0);
00351     if ( GetVar(name,&type,&v->couplings[v->ncouplings],CSYMBOL,WITHAUTO)
00352         == NAMENOTFOUND ) {
00353         WORD minpow = -MAXPOWER;
00354         WORD maxpow = MAXPOWER;
00355         WORD cplx = 0, dim = 0;
00356         v->couplings[v->ncouplings] = AddSymbol(name,minpow,maxpow,cplx,dim);
00357     }
00358     *s = c;
00359     v->ncouplings++;
00360 /*
00361     Now possibly a power
00362 */
00363     if ( *s == '^' ) { /* we need an integer */
00364         WORD x = 0; WORD sign = 1;
00365         s++;
00366         while ( *s == '-' || *s == '+' ) {
00367             if ( *s == '-' ) sign = -sign;
00368             s++;
00369         }
00370         while ( FG.cTable[*s] == 1 ) x = 10*x + *s++ - '0';
00371         v->couplings[v->ncouplings++] = x;
00372     }
00373     else {
00374         v->couplings[v->ncouplings++] = 1;
00375     }
00376     SKIPBLANKS(s);
00377     if ( *s == '*' ) { s++; continue; }
00378     if ( *s != ',' ) break;
00379     s++;
00380     SKIPBLANKS(s);
00381 }
00382 }
00383 else {
00384     v->error = 1;
00385     MesPrint("%A vertex statement needs at least one coupling constant.");
00386 }
00387 }
00388 if ( v->error == 0 ) {
00389 /*
00390     Register which types of vertices are possible for each particle.
00391 */
00392     int i, j;
00393     for ( i = 0; i < v->nparticles; i++ ) {
00394         for ( j = 0; j < m->nparticles; j++ ) {
00395             if ( m->vertices[j]->particles[0].number == v->particles[i].number ) break;
00396             if ( m->vertices[j]->particles[1].number == v->particles[i].number ) break;
00397         }
00398         m->vertices[j]->couplings[v->nparticles] = 1;
00399     }
00400 }
00401 return(v->error);
00402 }
00403
00404 /*
00405 #] CoVertex :
00406 #[ CoEndModel :
00407 */
00408
00409 int CoEndModel(UBYTE *s)
00410 {
00411     int i, j, k, kk;
00412     WORD csize = 0, *newcouplings, newsize;
00413     MODEL *m;
00414     VERTEX *v;
00415     if ( AC.ModelLevel <= 0 ) {
00416         MesPrint("&EndModel statement without matching Model statement");
00417         return(1);
00418     }
00419     m = AC.models[AC.nummodels-1];
00420 /*
00421     Now create a list of all coupling constants.
00422     Note that we do not expect an astronomical number of them and hence
00423     we use a simple insertion algorithm.
00424 */
00425     m->ncouplings = 0;
00426     for ( i = 0; i < m->nvertices; i++ ) {
00427         v = m->vertices[i+m->nparticles];
00428         m->legcouple[v->nparticles] = 1;
00429         if ( m->ncouplings + v->ncouplings > csize ) {
00430             if ( csize == 0 ) newsize = v->ncouplings + 10;
00431             else newsize = 2*csize;
00432             newcouplings = (WORD *)Malloc1(newsize*sizeof(WORD),"m->couplings");
00433             for ( k = 0; k < m->ncouplings; k++ ) newcouplings[k] = m->couplings[k];

```

```


00434         if ( csize > 0 ) M_free(m->couplings,"m->couplings");
00435         m->couplings = newcouplings;
00436         csize = newsize;
00437     }
00438     for ( j = 0; j < v->ncouplings; j += 2 ) {
00439         WORD sym = v->couplings[j];
00440         for ( k = 0; k < m->ncouplings; k++ ) {
00441             if ( sym == m->couplings[k] ) break;
00442             if ( sym < m->couplings[k] ) {
00443                 for ( kk = m->ncouplings; kk > k; k-- )
00444                     m->couplings[kk] = m->couplings[kk-1];
00445                 m->couplings[k] = sym;
00446                 m->ncouplings++;
00447                 break;
00448             }
00449         }
00450         if ( k >= m->ncouplings ) m->couplings[m->ncouplings++] = sym;
00451     }
00452 }
00453 AC.ModelLevel--;
00454 DUMMYUSE(s)
00455 return(LoadModel(m));
00456 }
00457
00458 /*
00459  #] CoEndModel :
00460 */

```

4.79 module.c File Reference

```
#include "form3.h"
```

Include dependency graph for module.c:

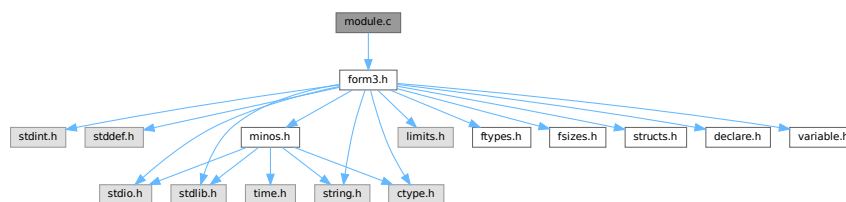

Functions

- int [ModuleInstruction](#) (int *moduletype, int *specialtype)
- int [CoModuleOption](#) (UBYTE *s)
- int [CoModOption](#) (UBYTE *s)
- void [SetSpecialMode](#) (int moduletype, int specialtype)
- int [ExecModule](#) (int moduletype)
- int [ExecStore](#) (void)
- void [FullCleanUp](#) (void)
- int [DoPolyfun](#) (UBYTE *s)
- int [DoPolyratfun](#) (UBYTE *s)
- int [DoNoParallel](#) (UBYTE *s)
- int [DoParallel](#) (UBYTE *s)
- int [DoModSum](#) (UBYTE *s)
- int [DoModMax](#) (UBYTE *s)
- int [DoModMin](#) (UBYTE *s)
- int [DoModLocal](#) (UBYTE *s)
- int [DoProcessBucket](#) (UBYTE *s)

- `UBYTE * DoModDollar` (`UBYTE *s`, `int type`)
- `int DoinParallel` (`UBYTE *s`)
- `int DonotinParallel` (`UBYTE *s`)
- `int DoExecStatement` (`void`)
- `int DoPipeStatement` (`void`)

4.79.1 Detailed Description

A number of routines that deal with the moduleoption statement and the execution of modules. Additionally there are the execution of the exec and pipe instructions.

Definition in file [module.c](#).

4.79.2 Function Documentation

4.79.2.1 ModuleInstruction()

```
int ModuleInstruction (
    int * moduletype,
    int * specialtype )
```

Definition at line 76 of file [module.c](#).

4.79.2.2 CoModuleOption()

```
int CoModuleOption (
    UBYTE * s )
```

Definition at line 143 of file [module.c](#).

4.79.2.3 CoModOption()

```
int CoModOption (
    UBYTE * s )
```

Definition at line 212 of file [module.c](#).

4.79.2.4 SetSpecialMode()

```
void SetSpecialMode (
    int moduletype,
    int specialtype )
```

Definition at line 257 of file [module.c](#).

4.79.2.5 ExecModule()

```
int ExecModule (
    int moduletype )
```

Definition at line [274](#) of file [module.c](#).

4.79.2.6 ExecStore()

```
int ExecStore (
    void )
```

Definition at line [299](#) of file [module.c](#).

4.79.2.7 FullCleanUp()

```
void FullCleanUp (
    void )
```

Definition at line [314](#) of file [module.c](#).

4.79.2.8 DoPolyfun()

```
int DoPolyfun (
    UBYTE * s )
```

Definition at line [395](#) of file [module.c](#).

4.79.2.9 DoPolyratfun()

```
int DoPolyratfun (
    UBYTE * s )
```

Definition at line [458](#) of file [module.c](#).

4.79.2.10 DoNoParallel()

```
int DoNoParallel (
    UBYTE * s )
```

Definition at line [529](#) of file [module.c](#).

4.79.2.11 DoParallel()

```
int DoParallel (
    UBYTE * s )
```

Definition at line [544](#) of file [module.c](#).

4.79.2.12 DoModSum()

```
int DoModSum (
    UBYTE * s )
```

Definition at line 559 of file [module.c](#).

4.79.2.13 DoModMax()

```
int DoModMax (
    UBYTE * s )
```

Definition at line 579 of file [module.c](#).

4.79.2.14 DoModMin()

```
int DoModMin (
    UBYTE * s )
```

Definition at line 599 of file [module.c](#).

4.79.2.15 DoModLocal()

```
int DoModLocal (
    UBYTE * s )
```

Definition at line 619 of file [module.c](#).

4.79.2.16 DoProcessBucket()

```
int DoProcessBucket (
    UBYTE * s )
```

Definition at line 639 of file [module.c](#).

4.79.2.17 DoModDollar()

```
UBYTE * DoModDollar (
    UBYTE * s,
    int type )
```

Definition at line 657 of file [module.c](#).

4.79.2.18 DoinParallel()

```
int DoinParallel (
    UBYTE * s )
```

Definition at line 758 of file [module.c](#).

4.79.2.19 DonotinParallel()

```
int DonotinParallel (
    UBYTE * s )
```

Definition at line 768 of file [module.c](#).

4.79.2.20 DoExecStatement()

```
int DoExecStatement (
    void )
```

Definition at line 780 of file [module.c](#).

4.79.2.21 DoPipeStatement()

```
int DoPipeStatement (
    void )
```

Definition at line 797 of file [module.c](#).

4.80 module.c

[Go to the documentation of this file.](#)

```
00001
00007 /* #[] License : */
00008 /*
00009  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00010  * When using this file you are requested to refer to the publication
00011  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00012  * This is considered a matter of courtesy as the development was paid
00013  * for by FOM the Dutch physics granting agency and we would like to
00014  * be able to track its scientific use to convince FOM of its value
00015  * for the community.
00016  *
00017  * This file is part of FORM.
00018  *
00019  * FORM is free software: you can redistribute it and/or modify it under the
00020  * terms of the GNU General Public License as published by the Free Software
00021  * Foundation, either version 3 of the License, or (at your option) any later
00022  * version.
00023  *
00024  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00025  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00026  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00027  * details.
00028  *
00029  * You should have received a copy of the GNU General Public License along
00030  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00031  */
00032 /* #[] License : */
00033 /*
00034  * #[] Includes :
00035  */
00036
00037 #include "form3.h"
00038
00039 /*
00040  * #[] Includes :
00041  * #[] Modules :
00042  * #[] ModuleInstruction :
00043
00044  * Enters after the . of .sort etc
00045  * We have word[[ (options) ][:commentary];]
00046  * Word is one of 'clear end global sort store'
00047  * Options are 'polyfun, endloopifunchanged, endloopifzero'
```



```

00048      Additions for solving equations can be added to 'word'
00049
00050      The flag in the moduleoptions is for telling whether the current
00051      option can be followed by others. If it is > 0 it cannot.
00052  */
00053
00054  static KEYWORD ModuleWords[] = {
00055      {"clear", (TFUN)0, CLEARMODULE, 0}
00056      , {"end", (TFUN)0, ENDMODULE, 0}
00057      , {"global", (TFUN)0, GLOBALMODULE, 0}
00058      , {"sort", (TFUN)0, SORTMODULE, 0}
00059      , {"store", (TFUN)0, STOREMODULE, 0}
00060  };
00061
00062  static KEYWORD ModuleOptions[] = {
00063      {"inparallel", DoinParallel, 1, 1}
00064      , {"local", DoModLocal, MODLOCAL, 0}
00065      , {"maximum", DoModMax, MODMAX, 0}
00066      , {"minimum", DoModMin, MODMIN, 0}
00067      , {"noparallel", DoNoParallel, NOPARALLEL_USER, 0}
00068      , {"notinparallel", DonotinParallel, 0, 1}
00069      , {"parallel", DoParallel, PARALLELFLAG, 0}
00070      , {"polyfun", DoPolyfun, POLYFUN, 0}
00071      , {"polyratfun", DoPolyratfun, POLYFUN, 0}
00072      , {"processbucketsize", DoProcessBucket, 0, 0}
00073      , {"sum", DoModSum, MODSUM, 0}
00074  };
00075
00076  int ModuleInstruction(int *moduletype, int *specialtype)
00077  {
00078      UBYTE *t, *s, *u, c;
00079      KEYWORD *key;
00080      int addit = 0, error = 0, i, j;
00081      DUMMYUSE(specialtype);
00082      LoadInstruction(0);
00083      AC.firstctypemessage = 0;
00084      s = AP.preStart; SKIPBLANKS(s)
00085      t = EndOfToken(s); c = *t; *t = 0;
00086      AC.origin = FROMPOINTINSTRUCTION;
00087      key = FindKeyWord(AP.preStart, ModuleWords, sizeof(ModuleWords)/sizeof(KEYWORD));
00088      if ( key == 0 ) {
00089          MesPrint("@Unrecognized module terminator: %s", s);
00090          error = 1;
00091          key = ModuleWords;
00092          while ( StrCmp((UBYTE *)key->name, (UBYTE *)"end") ) key++;
00093      }
00094      *t = c;
00095      *moduletype = key->type;
00096      SKIPBLANKS(t);
00097      while ( *t == '(' ) { /* There are options */
00098          s = t+1; SKIPBRA3(t)
00099          if ( *t == 0 ) {
00100              MesPrint("@Improper options field in . instruction");
00101              error = 1;
00102          }
00103          else {
00104              *t = 0;
00105              if ( CoModOption(s) ) error = 1;
00106              *t++ = ')';
00107          }
00108      }
00109      if ( *t == ':' ) { /* There is an 'advertisement' */
00110          t++;
00111          SKIPBLANKS(t)
00112          s = t; i = 0;
00113          while ( *t && *t != ';' ) {
00114              if ( *t == '\\ ' ) t++;
00115              t++; i++;
00116          }
00117          u = t;
00118          while ( u > s && u[-1] == ' ' ) { u--; i--; }
00119          if ( *u == '\\ ' ) { u++; i++; }
00120          for ( j = COMMERCIALSIZE-1; j >= 0; j-- ) {
00121              if ( i <= 0 ) break;
00122              AC.Commercial[j] = *--u; i--;
00123              if ( u > s && u[-1] == '\\ ' ) u--;
00124          }
00125          for ( ; j >= 0; j-- ) AC.Commercial[j] = ' ';
00126          AC.Commercial[COMMERCIALSIZE] = 0;
00127          addit += 2;
00128      }
00129      if ( addit && *t != ';' ) {
00130          MesPrint("@Improper ending of . instruction");
00131          error = -1;
00132      }
00133      return(error);
00134  }

```

```

00135
00136 /*
00137     #] ModuleInstruction :
00138     #[ CoModuleOption :
00139
00140     ModuleOption, options;
00141 */
00142
00143 int CoModuleOption(UBYTE *s)
00144 {
00145     UBYTE *t,*tt,c;
00146     KEYWORD *option;
00147     int error = 0, polyflag = 0;
00148     AC.origin = FROMMODULEOPTION;
00149     if ( *s ) do {
00150         s = ToToken(s);
00151         t = EndOfToken(s);
00152         c = *t; *t = 0;
00153         option = FindKeyWord(s,ModuleOptions,
00154             sizeof(ModuleOptions)/sizeof(KEYWORD));
00155         if ( option == 0 ) {
00156             if ( polyflag ) {
00157                 *t = c; t++; s = SkipAName(t);
00158                 polyflag = 0;
00159                 continue;
00160             }
00161             else {
00162                 MesPrint("@Unrecognized module option: %s",s);
00163                 error = 1;
00164                 polyflag = 0;
00165                 *t = c;
00166             }
00167         }
00168         else {
00169             *t = c;
00170             SKIPBLANKS(t)
00171             if ( (option->func)(t) ) error = 1;
00172         }
00173         if ( StrCmp((UBYTE *) (option->name), (UBYTE *) ("polyfun")) == 0
00174             || StrCmp((UBYTE *) (option->name), (UBYTE *) ("polyratfun")) == 0 ) {
00175             polyflag = 1;
00176             t++;
00177             t = SkipAName(t);
00178         }
00179         else polyflag = 0;
00180         if ( option->flags > 0 ) return(error);
00181         while ( *t ) {
00182             if ( *t == ',' ) {
00183                 tt = t+1;
00184                 while ( *tt == ',' ) tt++;
00185                 if ( *tt != '$' ) break;
00186                 t = tt+1;
00187             }
00188             if ( *t == ')' ) break;
00189             if ( *t == '(' ) SKIPBRA3(t)
00190             else if ( *t == '{' ) SKIPBRA2(t)
00191             else if ( *t == '[' ) SKIPBRA1(t)
00192             t++;
00193         }
00194         s = t;
00195     } while ( *s == ',' );
00196     if ( *s ) {
00197         MesPrint("@Unrecognized module option: %s",s);
00198         error = 1;
00199     }
00200     return(error);
00201 }
00202
00203 /*
00204     #] CoModuleOption :
00205     #[ CoModOption :
00206
00207     To be called from a .instruction.
00208     Only recognizes polyfun. The newer ones should be via the
00209     ModuleOption statement.
00210 */
00211
00212 int CoModOption(UBYTE *s)
00213 {
00214     UBYTE *t,c;
00215     int error = 0;
00216     AC.origin = FROMPOINTINSTRUCTION;
00217     if ( *s ) do {
00218         s = ToToken(s);
00219         t = EndOfToken(s);
00220         c = *t; *t = 0;
00221         if ( StrICmp(s, (UBYTE *) "polyfun") == 0 ) {

```

```

00222         *t = c;
00223         SKIPBLANKS(t)
00224         if ( DoPolyfun(t) ) error = 1;
00225     }
00226     else if ( StrICmp(s, (UBYTE *) "polyratfun") == 0 ) {
00227         *t = c;
00228         SKIPBLANKS(t)
00229         if ( DoPolyratfun(t) ) error = 1;
00230     }
00231     else {
00232         MesPrint("@Unrecognized module option in .instruction: %s",s);
00233         error = 1;
00234         *t = c;
00235     }
00236     while ( *t ) {
00237         if ( *t == ',' || *t == ')' ) break;
00238         if ( *t == '(' ) SKIPBRA3(t)
00239         else if ( *t == '{' ) SKIPBRA2(t)
00240         else if ( *t == '[' ) SKIPBRA1(t)
00241         t++;
00242     }
00243     s = t;
00244 } while ( *s == ',' );
00245 if ( *s ) {
00246     MesPrint("@Unrecognized module option in .instruction: %s",s);
00247     error = 1;
00248 }
00249 return(error);
00250 }
00251
00252 /*
00253     #] CoModOption :
00254     #[ SetSpecialMode :
00255 */
00256 void SetSpecialMode(int moduletype, int specialtype)
00257 {
00258     DUMMYUSE(moduletype); DUMMYUSE(specialtype);
00259 }
00260
00261 /*
00262     #] SetSpecialMode :
00263     #[ MakeGlobal :
00264
00265 void MakeGlobal()
00266 {
00267 }
00268
00269     #] MakeGlobal :
00270     #[ ExecModule :
00271 */
00272
00273 int ExecModule(int moduletype)
00274 {
00275     /*
00276     Here we check module options and other things that should
00277     be done at the start of a module.
00278     */
00279     #ifdef WITHFLOAT
00280     if ( ( AC.tMaxWeight != 0 && AC.tMaxWeight != AC.MaxWeight )
00281         || ( AC.tDefaultPrecision != 0 && AC.tDefaultPrecision != AC.DefaultPrecision ) ) {
00282         AC.DefaultPrecision = AC.tDefaultPrecision;
00283         AC.tDefaultPrecision = 0;
00284         AC.MaxWeight = AC.tMaxWeight;
00285         AC.tMaxWeight = 0;
00286         ClearMZVTables();
00287         SetupMZVTables();
00288     }
00289     #endif
00290     return (DoExecute(moduletype,0));
00291 }
00292
00293 /*
00294     #] ExecModule :
00295     #[ ExecStore :
00296 */
00297
00298 int ExecStore(void)
00299 {
00300     return(0);
00301 }
00302
00303 /*
00304     #] ExecStore :
00305     #[ FullCleanUp :
00306
00307 Remark 27-oct-2005 by JV
00308

```

```

00309         This routine (and Cleanup in startup.c) may still need some work:
00310         What to do with preprocessor variables
00311         What to do with files we write to
00312 */
00313
00314 void FullCleanup(void)
00315 {
00316     int j;
00317
00318     while ( AC.CurrentStream->previous >= 0 )
00319         AC.CurrentStream = CloseStream(AC.CurrentStream);
00320     AP.PreSwitchLevel = AP.PreIfLevel = 0;
00321
00322     for ( j = NumProcedures-1; j >= 0; j-- ) {
00323         if ( Procedures[j].name ) M_free(Procedures[j].name,"name of procedure");
00324         if ( Procedures[j].p.buffer ) M_free(Procedures[j].p.buffer,"buffer of procedure");
00325     }
00326     NumProcedures = 0;
00327
00328     while ( NumPre > AP.gNumPre ) {
00329         NumPre--;
00330         M_free(PreVar[NumPre].name,"PreVar[NumPre].name");
00331         PreVar[NumPre].name = PreVar[NumPre].value = 0;
00332     }
00333
00334     AC.DidClean = 0;
00335     for ( j = 0; j < NumExpressions; j++ ) {
00336         AC.exprnames->namenode[Expressions[j].node].type = CDELETE;
00337         AC.DidClean = 1;
00338     }
00339
00340     CompactifyTree(AC.exprnames,EXPRNAMES);
00341
00342     for ( j = AO.NumDictionaries-1; j >= 0; j-- ) {
00343         RemoveDictionary(AO.Dictionaries[j]);
00344         M_free(AO.Dictionaries[j],"Dictionary");
00345     }
00346     AO.NumDictionaries = AO.gNumDictionaries = 0;
00347     M_free(AO.Dictionaries,"Dictionaries");
00348     AO.Dictionaries = 0;
00349     AO.SizeDictionaries = 0;
00350     AP.OpenDictionary = 0;
00351     AO.CurrentDictionary = 0;
00352
00353     AP.ComChar = AP.cComChar;
00354     if ( AP.procedureExtension ) M_free(AP.procedureExtension,"procedureextension");
00355     AP.procedureExtension = strdup(AP.cprocedureExtension,"procedureextension");
00356
00357     AC.StatsFlag = AM.gStatsFlag = AM.ggStatsFlag;
00358     AC.extrasymbols = AM.gextrasymbols = AM.ggextrasymbols;
00359     AC.extrasym[0] = AM.gextrasym[0] = AM.ggextrasym[0] = 'Z';
00360     AC.extrasym[1] = AM.gextrasym[1] = AM.ggextrasym[1] = 0;
00361     AO.NoSpacesInNumbers = AM.gNoSpacesInNumbers = AM.ggNoSpacesInNumbers;
00362     AO.IndentSpace = AM.gIndentSpace = AM.ggIndentSpace;
00363     AC.ThreadStats = AM.gThreadStats = AM.ggThreadStats;
00364     AC.OldFactArgFlag = AM.gOldFactArgFlag = AM.ggOldFactArgFlag;
00365     AC.FinalStats = AM.gFinalStats = AM.ggFinalStats;
00366     AC.OldGCDflag = AM.gOldGCDflag = AM.ggOldGCDflag;
00367     AC.ThreadsFlag = AM.gThreadsFlag = AM.ggThreadsFlag;
00368     if ( AC.ThreadsFlag && AM.totalnumberofthreads > 1 ) AS.MultiThreaded = 1;
00369     AC.ThreadBucketSize = AM.gThreadBucketSize = AM.ggThreadBucketSize;
00370     AC.ThreadBalancing = AM.gThreadBalancing = AM.ggThreadBalancing;
00371     AC.ThreadSortFileSynch = AM.gThreadSortFileSynch = AM.ggThreadSortFileSynch;
00372     AC.ShortStatsMax = AM.gShortStatsMax = AM.ggShortStatsMax;
00373     AC.SizeCommuteInSet = AM.gSizeCommuteInSet = 0;
00374 #ifdef WITHFLOAT
00375     AC.MaxWeight = AM.gMaxWeight = AM.ggMaxWeight;
00376     AC.DefaultPrecision = AM.gDefaultPrecision = AM.ggDefaultPrecision;
00377 #endif
00378
00379     NumExpressions = 0;
00380     if ( DeleteStore(0) < 0 ) {
00381         MesPrint("@Cannot restart the storage file");
00382         Terminate(-1);
00383     }
00384     RemoveDollars();
00385     Cleanup(1);
00386     ResetVariables(2);
00387     IniVars();
00388 }
00389
00390 /*
00391     #] FullCleanup :
00392     #[ DoPolyfun :
00393 */
00394
00395 int DoPolyfun(UBYTE *s)

```

```

00396 {
00397     GETIDENTITY
00398     UBYTE *t, c;
00399     WORD funnum, eqsign = 0;
00400     if ( AC.origin == FROMPOINTINSTRUCTION ) {
00401         if ( *s == 0 || *s == ',' || *s == ')' ) {
00402             AR.PolyFun = 0; AR.PolyFunType = 0;
00403             return(0);
00404         }
00405         if ( *s != '=' ) {
00406             MesPrint("@Proper use in point instructions is: PolyFun[=functionname]");
00407             return(-1);
00408         }
00409         eqsign = 1;
00410     }
00411     else {
00412         if ( *s == 0 ) {
00413             AR.PolyFun = 0; AR.PolyFunType = 0;
00414             return(0);
00415         }
00416         if ( *s != '=' && *s != ',' ) {
00417             MesPrint("@Proper use is: PolyFun[{ ,=}functionname]");
00418             return(-1);
00419         }
00420         if ( *s == '=' ) eqsign = 1;
00421     }
00422     s++;
00423     SKIPBLANKS(s)
00424     t = EndOfToken(s);
00425     c = *t; *t = 0;
00426
00427     if ( GetName(AC.varnames,s,&funnum,WITHAUTO) != CFUNCTION ) {
00428         if ( AC.origin != FROMPOINTINSTRUCTION && eqsign == 0 ) {
00429             AR.PolyFun = 0; AR.PolyFunType = 0;
00430             return(0);
00431         }
00432         MesPrint("@ %s is not a properly declared function",s);
00433         *t = c;
00434         return(-1);
00435     }
00436     if ( functions[funnum].spec > 0 || functions[funnum].commute != 0 ) {
00437         MesPrint("@The PolyFun must be a regular commuting function!");
00438         *t = c;
00439         return(-1);
00440     }
00441     AR.PolyFun = funnum+FUNCTION; AR.PolyFunType = 1;
00442     *t = c;
00443     SKIPBLANKS(t)
00444     if ( *t && *t != ',' && *t != ')' ) {
00445         t++; c = *t; *t = 0;
00446         MesPrint("@Improper ending of end-of-module instruction: %s",s);
00447         *t = c;
00448         return(-1);
00449     }
00450     return(0);
00451 }
00452
00453 /*
00454     #] DoPolyfun :
00455     #[ DoPolyratfun :
00456 */
00457
00458 int DoPolyratfun(UBYTE *s)
00459 {
00460     GETIDENTITY
00461     UBYTE *t, c;
00462     WORD funnum;
00463     if ( AC.origin == FROMPOINTINSTRUCTION ) {
00464         if ( *s == 0 || *s == ',' || *s == ')' ) {
00465             AR.PolyFun = 0; AR.PolyFunType = 0; AR.PolyFunInv = 0; AR.PolyFunExp = 0;
00466             return(0);
00467         }
00468         if ( *s != '=' ) {
00469             MesPrint("@Proper use in point instructions is:
PolyRatFun[=functionname[+functionname]]");
00470             return(-1);
00471         }
00472     }
00473     else {
00474         if ( *s == 0 ) {
00475             AR.PolyFun = 0; AR.PolyFunType = 0; AR.PolyFunInv = 0; AR.PolyFunExp = 0;
00476             return(0);
00477         }
00478         if ( *s != '=' && *s != ',' ) {
00479             MesPrint("@Proper use is: PolyRatFun[{ ,=}functionname[+functionname]]");
00480             return(-1);
00481         }

```

```

00482     }
00483     s++;
00484     SKIPBLANKS(s)
00485     t = EndOfToken(s);
00486     c = *t; *t = 0;
00487
00488     if ( GetName(AC.varnames,s,&funnum,WITHAUTO) != CFUNCTION ) {
00489 Error1:;
00490         MesPrint("@ %s is not a properly declared function",s);
00491         *t = c;
00492         return(-1);
00493     }
00494     if ( functions[funnum].spec > 0 || functions[funnum].commute != 0 ) {
00495 Error2:;
00496         MesPrint("@The PolyRatFun must be a regular commuting function!");
00497         *t = c;
00498         return(-1);
00499     }
00500     AR.PolyFun = funnum+FUNCTION; AR.PolyFunType = 2;
00501     AR.PolyFunInv = 0;
00502     AR.PolyFunExp = 0;
00503     AC.PolyRatFunChanged = 1;
00504     *t = c;
00505     if ( *t == '+' ) {
00506         t++; s = t;
00507         t = EndOfToken(s);
00508         c = *t; *t = 0;
00509         if ( GetName(AC.varnames,s,&funnum,WITHAUTO) != CFUNCTION ) goto Error1;
00510         if ( functions[funnum].spec > 0 || functions[funnum].commute != 0 ) goto Error2;
00511         AR.PolyFunInv = funnum+FUNCTION;
00512         *t = c;
00513     }
00514     SKIPBLANKS(t)
00515     if ( *t && *t != ',' && *t != ')' ) {
00516         t++; c = *t; *t = 0;
00517         MesPrint("@Improper ending of end-of-module instruction: %s",s);
00518         *t = c;
00519         return(-1);
00520     }
00521     return(0);
00522 }
00523
00524 /*
00525     #] DoPolyratfun :
00526     #[ DoNoParallel :
00527 */
00528
00529 int DoNoParallel(UBYTE *s)
00530 {
00531     if ( *s == 0 || *s == ',' || *s == ')' ) {
00532         AC.mparallelfalg |= NOPARALLEL_USER;
00533         return(0);
00534     }
00535     MesPrint("@NoParallel should not have extra parameters");
00536     return(-1);
00537 }
00538
00539 /*
00540     #] DoNoParallel :
00541     #[ DoParallel :
00542 */
00543
00544 int DoParallel(UBYTE *s)
00545 {
00546     if ( *s == 0 || *s == ',' || *s == ')' ) {
00547         AC.mparallelfalg &= ~NOPARALLEL_USER;
00548         return(0);
00549     }
00550     MesPrint("@Parallel should not have extra parameters");
00551     return(-1);
00552 }
00553
00554 /*
00555     #] DoParallel :
00556     #[ DoModSum :
00557 */
00558
00559 int DoModSum(UBYTE *s)
00560 {
00561     while ( *s == ',' ) s++;
00562     if ( *s != '$' ) {
00563         MesPrint("@Module Sum should mention which $-variables");
00564         return(-1);
00565     }
00566     s = DoModDollar(s,MODSUM);
00567     if ( s && *s != 0 && *s != ')' ) {
00568         MesPrint("@Irregular end of Sum option of Module statement");

```

```

00569         return(-1);
00570     }
00571     return(0);
00572 }
00573
00574 /*
00575     #] DoModSum :
00576     #[ DoModMax :
00577 */
00578
00579 int DoModMax(UBYTE *s)
00580 {
00581     while ( *s == ',' ) s++;
00582     if ( *s != '$' ) {
00583         MesPrint("@Module Maximum should mention which $-variables");
00584         return(-1);
00585     }
00586     s = DoModDollar(s,MODMAX);
00587     if ( s && *s != 0 ) {
00588         MesPrint("@Irregular end of Maximum option of Module statement");
00589         return(-1);
00590     }
00591     return(0);
00592 }
00593
00594 /*
00595     #] DoModMax :
00596     #[ DoModMin :
00597 */
00598
00599 int DoModMin(UBYTE *s)
00600 {
00601     while ( *s == ',' ) s++;
00602     if ( *s != '$' ) {
00603         MesPrint("@Module Minimum should mention which $-variables");
00604         return(-1);
00605     }
00606     s = DoModDollar(s,MODMIN);
00607     if ( s && *s != 0 ) {
00608         MesPrint("@Irregular end of Minimum option of Module statement");
00609         return(-1);
00610     }
00611     return(0);
00612 }
00613
00614 /*
00615     #] DoModMin :
00616     #[ DoModLocal :
00617 */
00618
00619 int DoModLocal(UBYTE *s)
00620 {
00621     while ( *s == ',' ) s++;
00622     if ( *s != '$' ) {
00623         MesPrint("@ModuleOption Local should mention which $-variables");
00624         return(-1);
00625     }
00626     s = DoModDollar(s,MODLOCAL);
00627     if ( s && *s != 0 ) {
00628         MesPrint("@Irregular end of Local option of ModuleOption statement");
00629         return(-1);
00630     }
00631     return(0);
00632 }
00633
00634 /*
00635     #] DoModLocal :
00636     #[ DoProcessBucket :
00637 */
00638
00639 int DoProcessBucket(UBYTE *s)
00640 {
00641     LONG x;
00642     while ( *s == ',' || *s == '=' ) s++;
00643     ParseNumber(x,s)
00644     if ( *s && *s != ' ' && *s != '\t' ) {
00645         MesPrint("&Numerical value expected for ProcessBucketSize");
00646         return(1);
00647     }
00648     AC.mProcessBucketSize = x;
00649     return(0);
00650 }
00651
00652 /*
00653     #] DoProcessBucket :
00654     #[ DoModDollar :
00655 */

```

```

00656
00657 UBYTE * DoModDollar(UBYTE *s, int type)
00658 {
00659     UBYTE *name, c;
00660     WORD number;
00661     MODOPTDOLLAR *md;
00662     while ( *s == '$' ) {
00663 /*
00664         Read the name of the dollar
00665         Mark the type
00666 */
00667         s++;
00668         name = s;
00669         if ( FG.cTable[*s] == 0 ) {
00670             while ( FG.cTable[*s] == 0 || FG.cTable[*s] == 1 ) s++;
00671             c = *s; *s = 0;
00672             number = GetDollar(name);
00673             if ( number < 0 ) {
00674                 number = AddDollar(s,0,0,0);
00675                 Warning("&Undefined $-variable in module statement");
00676             }
00677             md = (MODOPTDOLLAR *)FromList(&AC.ModOptDolList);
00678             md->number = number;
00679             md->type = type;
00680 #ifdef WITHPTHREADS
00681             if ( type == MODLOCAL ) {
00682                 int j, i;
00683                 DOLLARS dglobal, dlocal;
00684                 md->dstruct = (DOLLARS)Mallocl(
00685                     sizeof(struct Dollars)*AM.totalnumberofthreads,"Local DOLLARS");
00686 /*
00687                 Now copy the global dollar into the local copies.
00688                 This can be nontrivial if the value needs an allocation.
00689                 We don't really need the locks.
00690 */
00691                 dglobal = Dollars + number;
00692                 for ( j = 0; j < AM.totalnumberofthreads; j++ ) {
00693                     dlocal = md->dstruct + j;
00694                     dlocal->index = dglobal->index;
00695                     dlocal->node = dglobal->node;
00696                     dlocal->type = dglobal->type;
00697                     dlocal->name = dglobal->name;
00698                     dlocal->size = dglobal->size;
00699                     dlocal->where = dglobal->where;
00700                     if ( dlocal->size > 0 ) {
00701                         dlocal->where = (WORD *)Mallocl((dlocal->size+1)*sizeof(WORD),"Local dollar
00702 value");
00703                         for ( i = 0; i < dlocal->size; i++ )
00704                             dlocal->where[i] = dglobal->where[i];
00705                         dlocal->where[dlocal->size] = 0;
00706                     }
00707                     dlocal->pthreadlockread = dummylock;
00708                     dlocal->pthreadlockwrite = dummylock;
00709                     dlocal->nfactors = dglobal->nfactors;
00710                     if ( dglobal->nfactors > 1 ) {
00711                         int nsize;
00712                         WORD *t, *m;
00713                         dlocal->factors = (FACDOLLAR
00714 *)Mallocl(dglobal->nfactors*sizeof(FACDOLLAR),"Dollar factors");
00715                         for ( i = 0; i < dglobal->nfactors; i++ ) {
00716                             nsize = dglobal->factors[i].size;
00717                             dlocal->factors[i].type = DOLUNDEFINED;
00718                             dlocal->factors[i].value = dglobal->factors[i].value;
00719                             if ( ( dlocal->factors[i].size = nsize ) > 0 ) {
00720                                 dlocal->factors[i].where = t = (WORD
00721 *)Mallocl(sizeof(WORD)*(nsize+1),"DollarCopyFactor");
00722                                 m = dglobal->factors[i].where;
00723                                 NCOPY(t,m,nsize);
00724                                 *t = 0;
00725                             }
00726                             else {
00727                                 dlocal->factors[i].where = 0;
00728                             }
00729                         }
00730                     }
00731                     else { dlocal->factors = 0; }
00732                 }
00733             }
00734             md->dstruct = 0;
00735         }
00736     }
00737 #endif
00738     *s = c;
00739     }
00740     else {
00741         MesPrint("&Illegal name for $-variable in module option");
00742         while ( *s != ',' && *s != 0 && *s != ')' ) s++;
00743     }

```



```

00740     }
00741     while ( *s == ',' ) s++;
00742 }
00743 return(s);
00744 }
00745
00746 /*
00747     #] DoModDollar :
00748     #[ DoinParallel :
00749
00750     The idea is that we should have the commands
00751     ModuleOption,InParallel;
00752     ModuleOption,InParallel,name1,name2,...,namen;
00753     ModuleOption,NotInParallel,name1,name2,...,namen;
00754     The advantage over the InParallel statement is that this statement
00755     comes after the definition of the expressions.
00756 */
00757
00758 int DoinParallel(UBYTE *s)
00759 {
00760     return(DoInParallel(s,1));
00761 }
00762
00763 /*
00764     #] DoinParallel :
00765     #[ DonotinParallel :
00766 */
00767
00768 int DonotinParallel(UBYTE *s)
00769 {
00770     return(DoInParallel(s,0));
00771 }
00772
00773 /*
00774     #] DonotinParallel :
00775     #] Modules :
00776     #[ External :
00777     #[ DoExecStatement :
00778 */
00779
00780 int DoExecStatement(void)
00781 {
00782 #ifdef WITHSYSTEM
00783     FLUSHCONSOLE;
00784     if ( system((char *) (AP.preStart)) ) return(-1);
00785     return(0);
00786 #else
00787     Error0("External programs not implemented on this computer/system");
00788     return(-1);
00789 #endif
00790 }
00791
00792 /*
00793     #] DoExecStatement :
00794     #[ DoPipeStatement :
00795 */
00796
00797 int DoPipeStatement(void)
00798 {
00799 #ifdef WITHPIPE
00800     FLUSHCONSOLE;
00801     if ( OpenStream(AP.preStart,PIPESTREAM,0,PREENOACTION) == 0 ) return(-1);
00802     return(0);
00803 #else
00804     Error0("Pipes not implemented on this computer/system");
00805     return(-1);
00806 #endif
00807 }
00808
00809 /*
00810     #] DoPipeStatement :
00811     #] External :
00812 */

```


4.81 mpi.c File Reference

```

#include <limits.h>
#include "form3.h"

```

Include dependency graph for mpi.c:

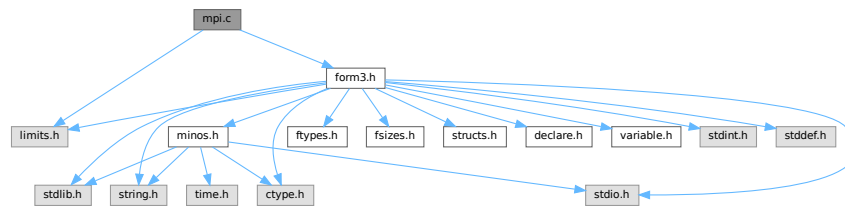

Data Structures

- struct [longMultiStruct](#)

Macros

- `#define PF_PACKSIZE 1600`
- `#define MPI_ERRCODE_CHECK(err)`

Typedefs

- typedef struct [longMultiStruct](#) **PF_LONGMULTI**

Functions

- LONG [PF_RealTime](#) (int i)
- int [PF_LibInit](#) (int *argcp, char ***argvp)
- int [PF_LibTerminate](#) (int error)
- int [PF_Probe](#) (int *src)
- int [PF_ISendSbuf](#) (int to, int tag)
- int [PF_RecvWbuf](#) (WORD *b, LONG *s, int *src)
- int [PF_IRecvRbuf](#) ([PF_BUFFER](#) *r, int bn, int from)
- int [PF_WaitRbuf](#) ([PF_BUFFER](#) *r, int bn, LONG *size)
- int [PF_Bcast](#) (void *buffer, int count)
- int [PF_RawSend](#) (int dest, void *buf, LONG l, int tag)
- LONG [PF_RawRecv](#) (int *src, void *buf, LONG thesize, int *tag)
- int [PF_RawProbe](#) (int *src, int *tag, int *bytesize)
- int [PF_PrintPackBuf](#) (char *s, int size)
- int [PF_PreparePack](#) (void)
- int [PF_Pack](#) (const void *buffer, size_t count, MPI_Datatype type)
- int [PF_Unpack](#) (void *buffer, size_t count, MPI_Datatype type)
- int [PF_PackString](#) (const UBYTE *str)
- int [PF_UnpackString](#) (UBYTE *str)
- int [PF_Send](#) (int to, int tag)
- int [PF_Receive](#) (int src, int tag, int *psrc, int *ptag)
- int [PF_Broadcast](#) (void)
- int [PF_PrepareLongSinglePack](#) (void)
- int [PF_LongSinglePack](#) (const void *buffer, size_t count, MPI_Datatype type)
- int [PF_LongSingleUnpack](#) (void *buffer, size_t count, MPI_Datatype type)
- int [PF_LongSingleSend](#) (int to, int tag)
- int [PF_LongSingleReceive](#) (int src, int tag, int *psrc, int *ptag)
- int [PF_PrepareLongMultiPack](#) (void)
- int [PF_LongMultiPackImpl](#) (const void *buffer, size_t count, size_t eSize, MPI_Datatype type)
- int [PF_LongMultiUnpackImpl](#) (void *buffer, size_t count, size_t eSize, MPI_Datatype type)
- int [PF_LongMultiBroadcast](#) (void)

Variables

- LONG [PF_maxDollarChunkSize](#) = 0

4.81.1 Detailed Description

MPI dependent functions of perform

This file contains all the functions for the parallel version of form3 that explicitly need to call mpi routines. This is the only file that really needs to be linked to the mpi-library!

Definition in file [mpi.c](#).

4.81.2 Macro Definition Documentation

4.81.2.1 PF_PACKSIZE

```
#define PF_PACKSIZE 1600
```

Definition at line 58 of file [mpi.c](#).

4.81.2.2 MPI_ERRCODE_CHECK

```
#define MPI_ERRCODE_CHECK(  
    err )
```

Value:

```
do { \
    int _tmp_err = (err); \
    if ( _tmp_err != MPI_SUCCESS ) return _tmp_err != 0 ? _tmp_err : -1; \
} while (0)
```

A macro which exits the caller with a non-zero return value if *err* is not MPI_SUCCESS.

Parameters

<i>err</i>	The return value of a MPI function to be checked.
------------	---

Remarks

The MPI standard defines MPI_SUCCESS == 0. Then (*_tmp_err* == 0) appears twice and we can expect the second evaluation will be eliminated by the compiler optimization.

Definition at line 84 of file [mpi.c](#).

4.81.3 Function Documentation

4.81.3.1 PF_RealTime()

```
LONG PF_RealTime (  
    int i )
```

Returns the realtime in 1/100 sec. as a LONG.

Parameters

<i>i</i>	the timer will be reset if <code>i == 0</code> .
----------	--

Returns

the real elapsed time in 1/100 second.

Definition at line 101 of file [mpi.c](#).

Referenced by [PF_Init\(\)](#).

4.81.3.2 PF_LibInit()

```
int PF_LibInit (
    int * argcp,
    char *** argvp )
```

Performs all library dependent initializations.

Parameters

<i>argcp</i>	pointer to the number of arguments.
<i>argvp</i>	pointer to the arguments.

Returns

0 if OK, nonzero on error.

Definition at line 123 of file [mpi.c](#).

Referenced by [PF_Init\(\)](#).

4.81.3.3 PF_LibTerminate()

```
int PF_LibTerminate (
    int error )
```

Exits mpi, when there is an error either indicated or happening, returnvalue is 1, else returnvalue is 0.

Parameters

<i>error</i>	an error code.
--------------	----------------

Returns

0 if OK, nonzero on error.

Definition at line 209 of file [mpi.c](#).

Referenced by [PF_Terminate\(\)](#).

4.81.3.4 PF_Probe()

```
int PF_Probe (
    int * src )
```

Probes the next incoming message. If `src == PF_ANY_SOURCE` this operation is blocking, otherwise nonblocking.

Parameters

<i>in, out</i>	<i>src</i>	the source process number. In output, the process number of actual found source.
----------------	------------	--

Returns

the tag value of the next incoming message if found, 0 if a nonblocking probe (input `src != PF_ANY_SOURCE`) did not find any messages. A negative returned value indicates an error.

Definition at line [230](#) of file [mpi.c](#).

4.81.3.5 PF_ISEND(buf)

```
int PF_ISEND (
    int to,
    int tag )
```

Nonblocking send operation. It sends everything from `buf` to `fill` of the active buffer. Depending on `tag` it also can do waiting for other sends to finish or set the active buffer to the next one.

Parameters

<i>to</i>	the destination process number.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line [261](#) of file [mpi.c](#).

Referenced by [FlushOut\(\)](#), [PF_Processor\(\)](#), and [PutOut\(\)](#).

4.81.3.6 PF_RECV(buf)

```
int PF_RECV (
    WORD * b,
    LONG * s,
    int * src )
```

Blocking receive of a `WORD` buffer.

Parameters

<i>out</i>	<i>b</i>	the buffer to store the received data.
<i>in, out</i>	<i>s</i>	the size of the buffer. The output value is the actual size of the received data.
<i>in, out</i>	<i>src</i>	the source process number. The output value is the process number of actual source.

Returns

the received message tag. A negative value indicates an error.

Definition at line 337 of file [mpi.c](#).

4.81.3.7 PF_IRecvRbuf()

```
int PF_IRecvRbuf (
    PF_BUFFER * r,
    int bn,
    int from )
```

Posts nonblocking receive for the active receive buffer. The buffer is filled from `full` to `stop`.

Parameters

<i>r</i>	the PF_BUFFER struct for the nonblocking receive.
<i>bn</i>	the index of the cyclic buffer.
<i>from</i>	the source process number.

Returns

0 if OK, nonzero on error.

Definition at line 366 of file [mpi.c](#).

4.81.3.8 PF_WaitRbuf()

```
int PF_WaitRbuf (
    PF_BUFFER * r,
    int bn,
    LONG * size )
```

Waits for the buffer *bn* to finish a pending nonblocking receive. It returns the received tag and in **size* the number of field received. If the receive is already finished, just return the flag and size, else wait for it to finish, but also check for other pending receives.

Parameters

	<i>r</i>	the PF_BUFFER struct for the pending nonblocking receive.
	<i>bn</i>	the index of the cyclic buffer.
<i>out</i>	<i>size</i>	the actual size of received data.

Returns

the received message tag. A negative value indicates an error.

Definition at line 400 of file [mpi.c](#).

4.81.3.9 PF_Bcast()

```
int PF_Bcast (
    void * buffer,
    int count )
```

Broadcasts a message from the master to slaves.

Parameters

<i>in, out</i>	<i>buffer</i>	the starting address of buffer. The contents in this buffer on the master will be transferred to those on the slaves.
	<i>count</i>	the length of the buffer in bytes.

Returns

0 if OK, nonzero on error.

Definition at line 440 of file [mpi.c](#).

Referenced by [PF_BroadcastBuffer\(\)](#), and [PF_BroadcastNumber\(\)](#).

4.81.3.10 PF_RawSend()

```
int PF_RawSend (
    int dest,
    void * buf,
    LONG l,
    int tag )
```

Sends *l* bytes from *buf* to *dest*. Returns 0 on success, or -1.

Parameters

<i>dest</i>	the destination process number.
<i>buf</i>	the send buffer.
<i>l</i>	the size of data in the send buffer in bytes.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line 463 of file [mpi.c](#).

Referenced by [PF_MUnlock\(\)](#), and [PF_SendFile\(\)](#).

4.81.3.11 PF_RawRecv()

```

LONG PF_RawRecv (
    int * src,
    void * buf,
    LONG thesize,
    int * tag )

```

Receives not more than *thesize* bytes from *src*, returns the actual number of received bytes, or -1 on failure.

Parameters

in, out	<i>src</i>	the source process number. In output, that of the actual received message.
out	<i>buf</i>	the receive buffer.
	<i>thesize</i>	the size of the receive buffer in bytes.
out	<i>tag</i>	the message tag of the actual received message.

Returns

the actual sizeof received data in bytes, or -1 on failure.

Definition at line [484](#) of file [mpi.c](#).

Referenced by [PF_RecvFile\(\)](#).

4.81.3.12 PF_RawProbe()

```

int PF_RawProbe (
    int * src,
    int * tag,
    int * bytesize )

```

Probes an incoming message.

Parameters

in, out	<i>src</i>	the source process number. In output, that of the actual received message.
in, out	<i>tag</i>	the message tag. In output, that of the actual received message.
out	<i>bytesize</i>	the size of incoming data in bytes.

Returns

0 if OK, nonzero on error.

Definition at line [508](#) of file [mpi.c](#).

4.81.3.13 PF_PrintPackBuf()

```

int PF_PrintPackBuf (
    char * s,
    int size )

```

Prints the contents in the pack buffer.

Parameters

<i>s</i>	a message to be shown.
<i>size</i>	the length of the buffer to be shown.

Returns

0 if OK, nonzero on error.

Definition at line 594 of file [mpi.c](#).

4.81.3.14 PF_PrepPack()

```
int PF_PrepPack (  
    void )
```

Prepares for the next pack operations on the sender.

Returns

0 if OK, nonzero on error.

Definition at line 624 of file [mpi.c](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), [PF_BroadcastString\(\)](#), and [PF_Init\(\)](#).

4.81.3.15 PF_Pack()

```
int PF_Pack (  
    const void * buffer,  
    size_t count,  
    MPI_Datatype type )
```

Adds data into the pack buffer.

Parameters

<i>buffer</i>	the pointer to the buffer storing the data to be packed.
<i>count</i>	the number of elements in the buffer.
<i>type</i>	the data type of elements in the buffer.

Returns

0 if OK, nonzero on error.

Definition at line 642 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), and [PF_Init\(\)](#).

4.81.3.16 PF_Unpack()

```
int PF_Unpack (
    void * buffer,
    size_t count,
    MPI_Datatype type )
```

Retrieves the next data in the pack buffer.

Parameters

out	<i>buffer</i>	the pointer to the buffer to store the unpacked data.
	<i>count</i>	the number of elements of data to be received.
	<i>type</i>	the data type of elements of data to be received.

Returns

0 if OK, nonzero on error.

Definition at line 671 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), and [PF_Init\(\)](#).

4.81.3.17 PF_PackString()

```
int PF_PackString (
    const UBYTE * str )
```

Packs a string *str* into the packed buffer `PF_packbuf`, including the trailing zero.

The first element (`PF_INT`) is the length of the packed portion of the string. If the string does not fit to the buffer `PF_packbuf`, the function packs only the initial portion. It returns the number of packed bytes, so if `(str[length-1]!='\0')` then the whole string fits to the buffer, if not, then the rest (`str+length`) must be packed and send again. On error, the function returns the negative error code.

One exception: the string `"\0\0"` is used as an image of the NULL, so all 3 characters will be packed.

Parameters

<i>str</i>	a string to be packed.
------------	------------------------

Returns

the number of packed bytes, or a negative value on failure.

Definition at line 706 of file [mpi.c](#).

Referenced by [PF_BroadcastString\(\)](#).

4.81.3.18 PF_UnpackString()

```
int PF_UnpackString (
    UBYTE * str )
```

Unpacks a string to *str* from the packed buffer PF_packbuf, including the trailing zero.

It returns the number of unpacked bytes, so if (str[length-1]=='\0') then the whole string was unpacked, if not, then the rest must be appended to (str+length). On error, the function returns the negative error code.

Parameters

out	<i>str</i>	the buffer to store the unpacked string
-----	------------	---

Returns

the number of unpacked bytes, or a negative value on failure.

Definition at line 774 of file [mpi.c](#).

Referenced by [PF_BroadcastString\(\)](#).

4.81.3.19 PF_Send()

```
int PF_Send (
    int to,
    int tag )
```

Sends the contents in the pack buffer to the process specified by *to*.

Example:

```
if ( PF.me == SRC ) {
    PF_PreparePack();
    // Packing operations here...
    PF_Send(DEST, TAG);
}
else if ( PF.me == DEST ) {
    PF_Receive(SRC, TAG, &actual_src, &actual_tag);
    // Unpacking operations here...
}
```

Parameters

<i>to</i>	the destination process number.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line 822 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

4.81.3.20 PF_Receive()

```
int PF_Receive (
    int src,
    int tag,
    int * psrc,
    int * ptag )
```

Receives data into the pack buffer from the process specified by *src*. This function allows &*src* == *psrc* or &*tag* == *ptag*. Either *psrc* or *ptag* can be NULL.

See the example of [PF_Send\(\)](#).

Parameters

	<i>src</i>	the source process number (can be PF_ANY_SOURCE).
	<i>tag</i>	the source message tag (can be PF_ANY_TAG).
out	<i>psrc</i>	the actual source process number of received message.
out	<i>ptag</i>	the received message tag.

Returns

0 if OK, nonzero on error.

Definition at line 848 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

4.81.3.21 PF_Broadcast()

```
int PF_Broadcast (
    void )
```

Broadcasts the contents in the pack buffer on the master to those on the slaves.

Example:

```
if ( PF.me == MASTER ) {
    PF_PrepPack();
    // Packing operations here...
}
PF_Broadcast();
if ( PF.me != MASTER ) {
    // Unpacking operations here...
}
```

Returns

0 if OK, nonzero on error.

Definition at line 883 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), [PF_BroadcastString\(\)](#), and [PF_Init\(\)](#).

4.81.3.22 PF_PrepareLongSinglePack()

```
int PF_PrepareLongSinglePack (
    void )
```

Prepares for the next long-single-pack operations on the sender.

Returns

0 if OK, nonzero on error.

Definition at line 1451 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.81.3.23 PF_LongSinglePack()

```
int PF_LongSinglePack (
    const void * buffer,
    size_t count,
    MPI_Datatype type )
```

Adds data into the "long single" pack buffer.

Parameters

<i>buffer</i>	the pointer to the buffer storing the data to be packed.
<i>count</i>	the number of elements in the buffer.
<i>type</i>	the data type of elements in the buffer.

Returns

0 if OK, nonzero on error.

Definition at line 1469 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.81.3.24 PF_LongSingleUnpack()

```
int PF_LongSingleUnpack (
    void * buffer,
    size_t count,
    MPI_Datatype type )
```

Retrieves the next data in the "long single" pack buffer.

Parameters

out	<i>buffer</i>	the pointer to the buffer to store the unpacked data.
	<i>count</i>	the number of elements of data to be received.
	<i>type</i>	the data type of elements of data to be received.

Returns

0 if OK, nonzero on error.

Definition at line 1503 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.81.3.25 PF_LongSingleSend()

```
int PF_LongSingleSend (
    int to,
    int tag )
```

Sends the contents in the "long single" pack buffer to the process specified by *to*.

Example:

```
if ( PF.me == SRC ) {
    PF_PrepareLongSinglePack();
    // Packing operations here...
    PF_LongSingleSend(DEST, TAG);
}
else if ( PF.me == DEST ) {
    PF_LongSingleReceive(SRC, TAG, &actual_src, &actual_tag);
    // Unpacking operations here...
}
```

Parameters

<i>to</i>	the destination process number.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line 1540 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.81.3.26 PF_LongSingleReceive()

```
int PF_LongSingleReceive (
    int src,
    int tag,
    int * psrc,
    int * ptag )
```

Receives data into the "long single" pack buffer from the process specified by *src*. This function allows *&src == psrc* or *&tag == ptag*. Either *psrc* or *ptag* can be NULL.

See the example of [PF_LongSingleSend\(\)](#).

Parameters

	<i>src</i>	the source process number (can be PF_ANY_SOURCE).
	<i>tag</i>	the source message tag (can be PF_ANY_TAG).
out	<i>psrc</i>	the actual source process number of received message.
out	<i>ptag</i>	the received message tag.

Returns

0 if OK, nonzero on error.

Definition at line 1583 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.81.3.27 PF_PrepareLongMultiPack()

```
int PF_PrepareLongMultiPack (
    void )
```

Prepares for the next long-multi-pack operations on the sender.

Returns

0 if OK, nonzero on error.

Definition at line 1643 of file [mpi.c](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastCBuf\(\)](#), [PF_BroadcastExpFlags\(\)](#), [PF_BroadcastModifiedDollars\(\)](#), and [PF_BroadcastRedefinedPreVars\(\)](#).

4.81.3.28 PF_LongMultiPackImpl()

```
int PF_LongMultiPackImpl (
    const void * buffer,
    size_t count,
    size_t eSize,
    MPI_Datatype type )
```

Adds data into the "long multi" pack buffer.

Parameters

<i>buffer</i>	the pointer to the buffer storing the data to be packed.
<i>count</i>	the number of elements in the buffer.
<i>eSize</i>	the byte size of each element of data.
<i>type</i>	the data type of elements in the buffer.

Returns


0 if OK, nonzero on error.

Definition at line 1662 of file [mpi.c](#).

References [PF_LongMultiPackImpl\(\)](#).

Referenced by [PF_LongMultiPackImpl\(\)](#).

Here is the call graph for this function:

**4.81.3.29 PF_LongMultiUnpackImpl()**

```
int PF_LongMultiUnpackImpl (
    void * buffer,
    size_t count,
    size_t eSize,
    MPI_Datatype type )
```

Retrieves the next data in the "long multi" pack buffer.

Parameters

out	<i>buffer</i>	the pointer to the buffer to store the unpacked data.
	<i>count</i>	the number of elements of data to be received.
	<i>eSize</i>	the byte size of each element of data.
	<i>type</i>	the data type of elements of data to be received.

Returns

0 if OK, nonzero on error.

Definition at line 1721 of file [mpi.c](#).

References [PF_LongMultiUnpackImpl\(\)](#).

Referenced by [PF_LongMultiUnpackImpl\(\)](#).

Here is the call graph for this function:



4.81.3.30 PF_LongMultiBroadcast()

```
int PF_LongMultiBroadcast (
    void )
```

Broadcasts the contents in the "long multi" pack buffer on the master to those on the slaves.

Example:

```
if ( PF.me == MASTER ) {
    PF_PrepareLongMultiPack();
    // Packing operations here...
}
PF_LongMultiBroadcast();
if ( PF.me != MASTER ) {
    // Unpacking operations here...
}
```

Returns

0 if OK, nonzero on error.

Definition at line 1807 of file [mpi.c](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastCBuf\(\)](#), [PF_BroadcastExpFlags\(\)](#), [PF_BroadcastModifiedDollars\(\)](#), and [PF_BroadcastRedefinedPreVars\(\)](#).

4.81.4 Variable Documentation

4.81.4.1 PF_maxDollarChunkSize

```
LONG PF_maxDollarChunkSize = 0
```

Definition at line 69 of file [mpi.c](#).

4.82 mpi.c

[Go to the documentation of this file.](#)

```

00001
00009 /* #[ License : */
00010 /*
00011 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 *   When using this file you are requested to refer to the publication
00013 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 *   This is considered a matter of courtesy as the development was paid
00015 *   for by FOM the Dutch physics granting agency and we would like to
00016 *   be able to track its scientific use to convince FOM of its value
00017 *   for the community.
00018 *
00019 *   This file is part of FORM.
00020 *
00021 *   FORM is free software: you can redistribute it and/or modify it under the
00022 *   terms of the GNU General Public License as published by the Free Software
00023 *   Foundation, either version 3 of the License, or (at your option) any later
00024 *   version.
00025 *
00026 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 *   details.
00030 *
00031 *   You should have received a copy of the GNU General Public License along
00032 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #[ License : */
00035 /*
00036     #[ Includes and variables :
00037 */
00038
00039 #include <limits.h>
00040 #include "form3.h"
00041
00042 #ifdef MPICH_PROFILING
00043 # include "mpe.h"
00044 #endif
00045
00046 #ifdef MPIDEBUGGING
00047 #include "mpidbg.h"
00048 #endif
00049
00050 /*[12oct2005 mt]:*/
00051 /*
00052     Today there was some cleanup, some stuff is moved into another place
00053     in this file, and PF_packsize is removed and PF_packsize is used
00054     instead. It is rather difficult to proper comment it, so not all these
00055     changing are marked by "[12oct2005 mt]"
00056 */
00057
00058 #define PF_PACKSIZE 1600
00059
00060 /*
00061     Size in bytes, will be initialized soon as
00062     PF_packsize=PF_PACKSIZE/sizeof(int)*sizeof(int); for possible
00063     future developing we prefer to do this initialization not here,
00064     but in PF_LibInit:
00065 */
00066
00067 static int PF_packsize = 0;
00068 static MPI_Status PF_status;
00069 LONG PF_maxDollarChunkSize = 0; /*:[04oct2005 mt]*/
00070
00071 static int PF_ShortPackInit(void);
00072 static int PF_longPackInit(void); /*:[12oct2005 mt]*/
00073
00084 #define MPI_ERRCODE_CHECK(err) \
00085     do { \
00086         int _tmp_err = (err); \
00087         if ( _tmp_err != MPI_SUCCESS ) return _tmp_err != 0 ? _tmp_err : -1; \
00088     } while (0)
00089
00090 /*
00091     #[ Includes and variables :
00092     #[ PF_RealTime :
00093 */
00094
00101 LONG PF_RealTime(int i)
00102 {
00103     static double starttime;
00104     if ( i == PF_RESET ) {
00105         starttime = MPI_Wtime();

```

```

00106         return((LONG)0);
00107     }
00108     return((LONG)( 100. * (MPI_Wtime() - starttime) ));
00109 }
00110
00111 /*
00112 #] PF_RealTime :
00113 #[ PF_LibInit :
00114 */
00115
00123 int PF_LibInit(int *argcp, char ***argvp)
00124 {
00125     int ret;
00126     ret = MPI_Init(argcp,argvp);
00127     if ( ret != MPI_SUCCESS ) return(ret);
00128     ret = MPI_Comm_rank(PF_COMM,&PF.me);
00129     if ( ret != MPI_SUCCESS ) return(ret);
00130     ret = MPI_Comm_size(PF_COMM,&PF.numtasks);
00131     if ( ret != MPI_SUCCESS ) return(ret);
00132
00133     /* Initialization of packed communications. */
00134     PF_packsize = PF_PACKSIZE/sizeof(int)*sizeof(int);
00135     if ( PF_ShortPackInit() ) return -1;
00136     if ( PF_longPackInit() ) return -1;
00137
00138     /*Block*/
00139     int bytes, totalbytes=0;
00140 /*
00141     There is one problem with maximal possible packing: there is no API to
00142     convert bytes to the record number. So, here we calculate the buffer
00143     size needed for storing dollarvars:
00144
00145     LONG PF_maxDollarChunkSize is the size for the portion of the dollar
00146     variable buffer suitable for broadcasting. This variable should be
00147     visible from parallel.c
00148
00149     Evaluate PF_Pack(numterms,1,PF_INT):
00150 */
00151     if ( ( ret = MPI_Pack_size(1,PF_INT,PF_COMM,&bytes) )!=MPI_SUCCESS )
00152         return(ret);
00153
00154     totalbytes+=bytes;
00155 /*
00156     Evaluate PF_Pack( newsize,1,PF_LONG):
00157 */
00158     if ( ( ret = MPI_Pack_size(1,PF_LONG,PF_COMM,&bytes) )!=MPI_SUCCESS )
00159         return(ret);
00160
00161     totalbytes += bytes;
00162 /*
00163     Now available room is PF_packsize-totalbytes
00164 */
00165     totalbytes = PF_packsize-totalbytes;
00166 /*
00167     Now totalbytes is the size of chunk in bytes.
00168     Evaluate this size in number of records:
00169
00170     Rough estimate:
00171 */
00172     PF_maxDollarChunkSize=totalbytes/sizeof(WORD);
00173 /*
00174     Go to the up limit:
00175 */
00176     do {
00177         if ( ( ret = MPI_Pack_size(
00178             ++PF_maxDollarChunkSize,PF_WORD,PF_COMM,&bytes) )!=MPI_SUCCESS )
00179             return(ret);
00180     } while ( bytes<totalbytes );
00181 /*
00182     Now the chunk size is too large
00183     And now evaluate the exact value:
00184 */
00185     do {
00186         if ( ( ret = MPI_Pack_size(
00187             --PF_maxDollarChunkSize,PF_WORD,PF_COMM,&bytes) )!=MPI_SUCCESS )
00188             return(ret);
00189     } while ( bytes>totalbytes );
00190 /*
00191     Now PF_maxDollarChunkSize is the size of chunk of PF_WORD fitting the
00192     buffer <= (PF_packsize-PF_INT-PF_LONG)
00193 */
00194     }/*Block*/
00195     return(0);
00196 }
00197 /*
00198 #] PF_LibInit :
00199 #[ PF_LibTerminate :

```

```

00200 */
00201
00209 int PF_LibTerminate(int error)
00210 {
00211     DUMMYUSE(error);
00212     return(MPI_Finalize());
00213 }
00214
00215 /*
00216 #] PF_LibTerminate :
00217 #[ PF_Probe :
00218 */
00219
00230 int PF_Probe(int *src)
00231 {
00232     int ret, flag;
00233     if ( *src == PF_ANY_SOURCE ) { /*Blocking call*/
00234         ret = MPI_Probe(*src,MPI_ANY_TAG,PF_COMM,&PF_status);
00235         flag = 1;
00236     }
00237     else { /*Non-blocking call*/
00238         ret = MPI_Iprobe(*src,MPI_ANY_TAG,PF_COMM,&flag,&PF_status);
00239     }
00240     *src = PF_status.MPI_SOURCE;
00241     if ( ret != MPI_SUCCESS ) { if ( ret > 0 ) ret *= -1; return(ret); }
00242     if ( !flag ) return(0);
00243     return(PF_status.MPI_TAG);
00244 }
00245
00246 /*
00247 #] PF_Probe :
00248 #[ PF_IsendSbuf :
00249 */
00250
00261 int PF_IsendSbuf(int to, int tag)
00262 {
00263     PF_BUFFER *s = PF.sbuf;
00264     int a = s->active;
00265     int size = s->fill[a] - s->buff[a];
00266     int r = 0;
00267
00268     static int finished;
00269
00270     s->fill[a] = s->buff[a];
00271     if ( s->numbufs == 1 ) {
00272         r = MPI_Ssend(s->buff[a],size,PF_WORD,MASTER,tag,PF_COMM);
00273         if ( r != MPI_SUCCESS ) {
00274             fprintf(stderr,"%d|&d] PF_IsendSbuf: MPI_Ssend returns: %d \n",
00275                 PF.me,(int)AC.CModule,r);
00276             fflush(stderr);
00277             return(r);
00278         }
00279         return(0);
00280     }
00281
00282     switch ( tag ) { /* things to do before sending */
00283     case PF_TERM_MSGTAG:
00284         if ( PF.sbuf->request[to] != MPI_REQUEST_NULL)
00285             r = MPI_Wait(&PF.sbuf->request[to],&PF.sbuf->retstat[to]);
00286         if ( r != MPI_SUCCESS ) return(r);
00287         break;
00288     default:
00289         break;
00290     }
00291
00292     r = MPI_Isend(s->buff[a],size,PF_WORD,to,tag,PF_COMM,&s->request[a]);
00293
00294     if ( r != MPI_SUCCESS ) return(r);
00295
00296     switch ( tag ) { /* things to do after initialising sending */
00297     case PF_TERM_MSGTAG:
00298         finished = 0;
00299         break;
00300     case PF_ENDSORT_MSGTAG:
00301         if ( ++finished == PF.numtasks - 1 )
00302             r = MPI_Waitall(s->numbufs,s->request,s->status);
00303         if ( r != MPI_SUCCESS ) return(r);
00304         break;
00305     case PF_BUFFER_MSGTAG:
00306         if ( ++s->active >= s->numbufs ) s->active = 0;
00307         while ( s->request[s->active] != MPI_REQUEST_NULL ) {
00308             r = MPI_Waitsome(s->numbufs,s->request,&size,s->index,s->retstat);
00309             if ( r != MPI_SUCCESS ) return(r);
00310         }
00311         break;
00312     case PF_ENDBUFFER_MSGTAG:
00313         if ( ++s->active >= s->numbufs ) s->active = 0;

```

```

00314         r = MPI_Waitall(s->numbufs,s->request,s->status);
00315         if ( r != MPI_SUCCESS ) return(r);
00316         break;
00317     default:
00318         return(-99);
00319         break;
00320     }
00321     return(0);
00322 }
00323
00324 /*
00325     #] PF_IsendSbuf :
00326     #[ PF_RecvWbuf :
00327 */
00328
00337 int PF_RecvWbuf(WORD *b, LONG *s, int *src)
00338 {
00339     int i, r = 0;
00340
00341     r = MPI_Recv(b, (int)*s, PF_WORD, *src, PF_ANY_MSGTAG, PF_COMM, &PF_status);
00342     if ( r != MPI_SUCCESS ) { if ( r > 0 ) r *= -1; return(r); }
00343
00344     r = MPI_Get_count(&PF_status, PF_WORD, &i);
00345     if ( r != MPI_SUCCESS ) { if ( r > 0 ) r *= -1; return(r); }
00346
00347     *s = (LONG)i;
00348     *src = PF_status.MPI_SOURCE;
00349     return(PF_status.MPI_TAG);
00350 }
00351
00352 /*
00353     #] PF_RecvWbuf :
00354     #[ PF_IRecvRbuf :
00355 */
00356
00366 int PF_IRecvRbuf(PF_BUFFER *r, int bn, int from)
00367 {
00368     int ret;
00369     r->type[bn] = PF_WORD;
00370
00371     if ( r->numbufs == 1 ) {
00372         r->tag[bn] = MPI_ANY_TAG;
00373         r->from[bn] = from;
00374     }
00375     else {
00376         ret = MPI_Irecv(r->full[bn], (int)(r->stop[bn] - r->full[bn]), PF_WORD, from,
00377             MPI_ANY_TAG, PF_COMM, &r->request[bn]);
00378         if (ret != MPI_SUCCESS) { if (ret > 0) ret *= -1; return(ret); }
00379     }
00380     return(0);
00381 }
00382
00383 /*
00384     #] PF_IRecvRbuf :
00385     #[ PF_WaitRbuf :
00386 */
00387
00400 int PF_WaitRbuf(PF_BUFFER *r, int bn, LONG *size)
00401 {
00402     int ret, rsize;
00403
00404     if ( r->numbufs == 1 ) {
00405         *size = r->stop[bn] - r->full[bn];
00406         ret = MPI_Recv(r->full[bn], (int)*size, r->type[bn], r->from[bn], r->tag[bn],
00407             PF_COMM, &(r->status[bn]));
00408         if ( ret != MPI_SUCCESS ) { if ( ret > 0 ) ret *= -1; return(ret); }
00409         ret = MPI_Get_count(&(r->status[bn]), r->type[bn], &rsize);
00410         if ( ret != MPI_SUCCESS ) { if ( ret > 0 ) ret *= -1; return(ret); }
00411         if ( rsize > *size ) return(-99);
00412         *size = (LONG)rsize;
00413     }
00414     else {
00415         while ( r->request[bn] != MPI_REQUEST_NULL ) {
00416             ret = MPI_Waitsome(r->numbufs, r->request, &rsize, r->index, r->retstat);
00417             if ( ret != MPI_SUCCESS ) { if ( ret > 0 ) ret *= -1; return(ret); }
00418             while ( --rsize >= 0 ) r->status[r->index[rsize]] = r->retstat[rsize];
00419         }
00420         ret = MPI_Get_count(&(r->status[bn]), r->type[bn], &rsize);
00421         if ( ret != MPI_SUCCESS ) { if ( ret > 0 ) ret *= -1; return(ret); }
00422         *size = (LONG)rsize;
00423     }
00424     return(r->status[bn].MPI_TAG);
00425 }
00426
00427 /*
00428     #] PF_WaitRbuf :
00429     #[ PF_Bcast :

```

```

00430 */
00431
00440 int PF_Bcast(void *buffer, int count)
00441 {
00442     if ( MPI_Bcast(buffer, count, MPI_BYTE, MASTER, PF_COMM) != MPI_SUCCESS )
00443         return(-1);
00444     return(0);
00445 }
00446
00447 /*
00448     #] PF_Bcast :
00449     #[ PF_RawSend :
00450 */
00451
00463 int PF_RawSend(int dest, void *buf, LONG l, int tag)
00464 {
00465     int ret=MPI_Ssend(buf, (int)l, MPI_BYTE, dest, tag, PF_COMM);
00466     if ( ret != MPI_SUCCESS ) return(-1);
00467     return(0);
00468 }
00469 /*
00470     #] PF_RawSend :
00471     #[ PF_RawRecv :
00472 */
00473
00484 LONG PF_RawRecv(int *src, void *buf, LONG thesize, int *tag)
00485 {
00486     MPI_Status stat;
00487     int ret=MPI_Recv(buf, (int)thesize, MPI_BYTE, *src, MPI_ANY_TAG, PF_COMM, &stat);
00488     if ( ret != MPI_SUCCESS ) return(-1);
00489     if ( MPI_Get_count(&stat, MPI_BYTE, &ret) != MPI_SUCCESS ) return(-1);
00490     *tag = stat.MPI_TAG;
00491     *src = stat.MPI_SOURCE;
00492     return(ret);
00493 }
00494
00495 /*
00496     #] PF_RawRecv :
00497     #[ PF_RawProbe :
00498 */
00499
00508 int PF_RawProbe(int *src, int *tag, int *bytesize)
00509 {
00510     MPI_Status stat;
00511     int srcval = src != NULL ? *src : PF_ANY_SOURCE;
00512     int tagval = tag != NULL ? *tag : PF_ANY_MSGTAG;
00513     int ret = MPI_Probe(srcval, tagval, PF_COMM, &stat);
00514     if ( ret != MPI_SUCCESS ) return -1;
00515     if ( src != NULL ) *src = stat.MPI_SOURCE;
00516     if ( tag != NULL ) *tag = stat.MPI_TAG;
00517     if ( bytesize != NULL ) {
00518         ret = MPI_Get_count(&stat, MPI_BYTE, bytesize);
00519         if ( ret != MPI_SUCCESS ) return -1;
00520     }
00521     return 0;
00522 }
00523
00524 /*
00525     #] PF_RawProbe :
00526     #[ The pack buffer :
00527         #[ Variables :
00528 */
00529
00530 /*
00531     * The pack buffer with the fixed size (= PF_packsize).
00532 */
00533 static UBYTE *PF_packbuf = NULL;
00534 static UBYTE *PF_packstop = NULL;
00535 static int PF_packpos = 0;
00536
00537 /*
00538     #] Variables :
00539     #[ PF_ShortPackInit :
00540 */
00541
00548 static int PF_ShortPackInit(void)
00549 {
00550     PF_packbuf = (UBYTE *)Malloc1(sizeof(UBYTE) * PF_packsize, "PF_ShortPackInit");
00551     if ( PF_packbuf == NULL ) return -1;
00552     PF_packstop = PF_packbuf + PF_packsize;
00553     return 0;
00554 }
00555
00556 /*
00557     #] PF_ShortPackInit :
00558     #[ PF_InitPackBuf :
00559 */

```

```

00560
00566 static inline int PF_InitPackBuf(void)
00567 {
00568 /*
00569      This is definitely not the best place for allocating the
00570      buffer! Moved to PF_LibInit():
00571
00572      if ( PF_packbuf == 0 ) {
00573          PF_packbuf = (UBYTE *)Malloc1(sizeof(UBYTE)*PF.packsize,"PF_InitPackBuf");
00574          if ( PF_packbuf == 0 ) return(-1);
00575          PF_packstop = PF_packbuf + PF.packsize;
00576      }
00577 */
00578     PF_packpos = 0;
00579     return(0);
00580 }
00581
00582 /*
00583      #] PF_InitPackBuf :
00584      #[ PF_PrintPackBuf :
00585 */
00586
00594 int PF_PrintPackBuf(char *s, int size)
00595 {
00596 #ifdef NOMESPRINTYET
00597 /*
00598      The use of printf should be discouraged. The results are flushed to
00599      the output at unpredictable moments. We should use printf only
00600      during startup when MesPrint doesn't have its buffers and output
00601      channels initialized.
00602 */
00603     int i;
00604     printf("[%d] %s: ",PF.me,s);
00605     for(i=0;i<size;i++) printf("%d ",PF_packbuf[i]);
00606     printf("\n");
00607 #else
00608     MesPrint("[%d] %s: %a",PF.me,s,size,(WORD *) (PF_packbuf));
00609 #endif
00610     return(0);
00611 }
00612
00613 /*
00614      #] PF_PrintPackBuf :
00615      #[ PF_PreparePack :
00616 */
00617
00624 int PF_PreparePack(void)
00625 {
00626     return PF_InitPackBuf();
00627 }
00628
00629 /*
00630      #] PF_PreparePack :
00631      #[ PF_Pack :
00632 */
00633
00642 int PF_Pack(const void *buffer, size_t count, MPI_Datatype type)
00643 {
00644     int err, bytes;
00645
00646     if ( count > INT_MAX ) return -99;
00647
00648     err = MPI_Pack_size((int)count, type, PF_COMM, &bytes);
00649     MPI_ERRCODE_CHECK(err);
00650     if ( PF_packpos + bytes > PF_packstop - PF_packbuf ) return -99;
00651
00652     err = MPI_Pack((void *)buffer, (int)count, type, PF_packbuf, PF_packsize, &PF_packpos, PF_COMM);
00653     MPI_ERRCODE_CHECK(err);
00654
00655     return 0;
00656 }
00657
00658 /*
00659      #] PF_Pack :
00660      #[ PF_Unpack :
00661 */
00662
00671 int PF_Unpack(void *buffer, size_t count, MPI_Datatype type)
00672 {
00673     int err;
00674
00675     if ( count > INT_MAX ) return -99;
00676
00677     err = MPI_Unpack(PF_packbuf, PF_packsize, &PF_packpos, buffer, (int)count, type, PF_COMM);
00678     MPI_ERRCODE_CHECK(err);
00679
00680     return 0;

```



```

00681 }
00682
00683 /*
00684     #] PF_Unpack :
00685     #[ PF_PackString :
00686 */
00687
00706 int PF_PackString(const UBYTE *str)
00707 {
00708     int ret,buflength,bytes,length;
00709     /*
00710         length will be packed in the beginning.
00711         Decrement buffer size by the length of the field "length":
00712     */
00713     if ( ( ret = MPI_Pack_size(1,PF_INT,PF_COMM,&bytes) ) != MPI_SUCCESS )
00714         return(ret);
00715     buflength = PF_packsize - bytes;
00716     /*
00717         Calculate the string length (INCLUDING the trailing zero!):
00718     */
00719     for ( length = 0; length < buflength; length++ ) {
00720         if ( str[length] == '\0' ) {
00721             length++; /* since the trailing zero must be accounted */
00722             break;
00723         }
00724     }
00725     /*
00726         The string "\0!\0" is used as an image of the NULL.
00727     */
00728     if ( ( str[0] == '\0' ) /* empty string */
00729         && ( str[1] == '!' ) /* Special case? */
00730         && ( str[2] == '\0' ) /* Yes, pass 3 initial symbols */
00731         ) length += 2; /* all 3 characters will be packed */
00732     length++; /* Will be decremented in the following loop */
00733     /*
00734         The problem: packed size of byte may be not equal 1! So first, suppose
00735         it is 1, and if this is not the case decrease the length of the string
00736         until it fits the buffer:
00737     */
00738     do {
00739         if ( ( ret = MPI_Pack_size(--length,PF_BYTE,PF_COMM,&bytes) )
00740             != MPI_SUCCESS ) return(ret);
00741     } while ( bytes > buflength );
00742     /*
00743         Note, now if str[length-1] == '\0' then the string fits to the buffer
00744         (INCLUDING the trailing zero!);if not, the rest must be packed further!
00745
00746         Pack the length to PF_packbuf:
00747     */
00748     if ( ( ret = MPI_Pack(&length,1,PF_INT,PF_packbuf,PF_packsize,
00749         &PF_packpos,PF_COMM) ) != MPI_SUCCESS ) return(ret);
00750     /*
00751         Pack the string to PF_packbuf:
00752     */
00753     if ( ( ret = MPI_Pack((UBYTE *)str,length,PF_BYTE,PF_packbuf,PF_packsize,
00754         &PF_packpos,PF_COMM) ) != MPI_SUCCESS ) return(ret);
00755     return(length);
00756 }
00757
00758 /*
00759     #] PF_PackString :
00760     #[ PF_UnpackString :
00761 */
00762
00774 int PF_UnpackString(UBYTE *str)
00775 {
00776     int ret,length;
00777     /*
00778         Unpack the length:
00779     */
00780     if( (ret = MPI_Unpack(PF_packbuf,PF_packsize,&PF_packpos,
00781         &length,1,PF_INT,PF_COMM)) != MPI_SUCCESS )
00782         return(ret);
00783     /*
00784         Unpack the string:
00785     */
00786     if ( ( ret = MPI_Unpack(PF_packbuf,PF_packsize,&PF_packpos,
00787         str,length,PF_BYTE,PF_COMM) ) != MPI_SUCCESS ) return(ret);
00788     /*
00789         Now if str[length-1]=='\0' then the whole string
00790         (INCLUDING the trailing zero!) was unpacked ;if not, the rest
00791         must be unpacked to str+length.
00792     */
00793     return(length);
00794 }
00795
00796 /*

```

```

00797         #] PF_UnpackString :
00798         #[ PF_Send :
00799     */
00800
00822 int PF_Send(int to, int tag)
00823 {
00824     int err;
00825     err = MPI_Ssend(PF_packbuf, PF_packpos, MPI_PACKED, to, tag, PF_COMM);
00826     MPI_ERRCODE_CHECK(err);
00827     return 0;
00828 }
00829
00830 /*
00831     #] PF_Send :
00832     #[ PF_Receive :
00833 */
00834
00848 int PF_Receive(int src, int tag, int *psrc, int *ptag)
00849 {
00850     int err;
00851     MPI_Status status;
00852     PF_InitPackBuf();
00853     err = MPI_Recv(PF_packbuf, PF_packsize, MPI_PACKED, src, tag, PF_COMM, &status);
00854     MPI_ERRCODE_CHECK(err);
00855     if ( psrc ) *psrc = status.MPI_SOURCE;
00856     if ( ptag ) *ptag = status.MPI_TAG;
00857     return 0;
00858 }
00859
00860 /*
00861     #] PF_Receive :
00862     #[ PF_Broadcast :
00863 */
00864
00883 int PF_Broadcast(void)
00884 {
00885     int err;
00886     /*
00887     * If PF_SHORTBROADCAST is defined, then the broadcasting will be performed in
00888     * 2 steps. First, the size of the buffer will be broadcast, then the buffer of
00889     * exactly used size. This should be faster with slow connections, but slower on
00890     * SMP shmem MPI because of the latency.
00891     */
00892     #ifdef PF_SHORTBROADCAST
00893         int pos = PF_packpos;
00894     #endif
00895     if ( PF.me != MASTER ) {
00896         err = PF_InitPackBuf();
00897         if ( err ) return err;
00898     }
00899     #ifdef PF_SHORTBROADCAST
00900         err = MPI_Bcast(&pos, 1, MPI_INT, MASTER, PF_COMM);
00901         MPI_ERRCODE_CHECK(err);
00902         err = MPI_Bcast(PF_packbuf, pos, MPI_PACKED, MASTER, PF_COMM);
00903     #else
00904         err = MPI_Bcast(PF_packbuf, PF_packsize, MPI_PACKED, MASTER, PF_COMM);
00905     #endif
00906     MPI_ERRCODE_CHECK(err);
00907     return 0;
00908 }
00909
00910 /*
00911     #] PF_Broadcast :
00912     #] The pack buffer :
00913     #[ Long pack stuff :
00914     #[ Explanations :
00915
00916     The problems here are:
00917     1. We need to send/receive long dollar variables. For
00918     preprocessor-defined dollarvars we used multiply
00919     packing/broadcasting (see parallel.c:PF_BroadcastPreDollar())
00920     since each variable must be broadcast immediately. For run-time
00921     the changed dollar variables, collecting and broadcasting are
00922     performed at the end of the module and all modified dollarvars
00923     are transferred "at once", that is why the size of packed and
00924     transferred buffers may be really very large.
00925     2. There is some strange feature of MPI_Bcast() on Altix MPI
00926     implementation, namely, sometimes it silently fails with big
00927     buffers. For better performance, it would be useful to send one
00928     big buffer instead of several small ones (since the latency is more
00929     important than the bandwidth). That is why we need two different
00930     sets of routines: for long point-to-point communication we collect
00931     big re-allocatable buffer, the corresponding routines have the
00932     prefix PF_longSingle, and for broadcasting we pack data into
00933     several smaller buffers, the corresponding routines have the
00934     prefix PF_longMulti.
00935     Note, from portability reasons we cannot split large packed

```

```

00936     buffer into small chunks, send them and collect back on the other
00937     side, see "Advice to users" on page 180 MPI--The Complete Reference
00938     Volume1, second edition.
00939     OPTIMIZING:
00940     We assume, for most communications, the single buffer of size
00941     PF_packsize is enough.
00942
00943     How does it work:
00944     For point-to-point, there is one big re-allocatable
00945     buffer PF_longPackBuf with two integer positions: PF_longPackPos
00946     and PF_longPackTop (due to re-allocatable character of the buffer,
00947     it is better to use integers rather than pointers).
00948     Each time of re-allocation, the size of the buffer
00949     PF_longPackBuf is incremented by the same size of a "standard" chunk
00950     PF_packsize.
00951     For broadcasting there is one linked list (PF_longMultiRoot),
00952     which contains either positions of a chunk of PF_longPackBuf, or
00953     it's own buffer. This is done for better memory utilisation:
00954     longSingle and longMulti are never used simultaneously.
00955     When a new cell is needed for longMulti packing, we increment
00956     the counter PF_longPackN and just follow the list. If it is not
00957     possible, we allocate the cell's own buffer and link it to the end
00958     of the list PF_longMultiRoot.
00959     When PF_longPackPos is reallocated, we link new chunks into
00960     existing PF_longMultiRoot list before the first longMulti allocated
00961     cell's own buffer. The pointer PF_longMultiLastChunk points to the last
00962     cell of PF_longMultiRoot containing the pointer to the chunk of
00963     PF_longPackBuf.
00964     Initialization PF_longPackBuf is made by the function
00965     PF_longSingleReset(). In the begin of the PF_longPackBuf it packs
00966     the size of the last sent buffer. Upon sending, the program checks,
00967     whether there was at list one re-allocation (PF_longPackN>1) .
00968     If so, the sender first packs and sends small buffer
00969     (PF_longPackSmallBuf) containing one integer number -- the
00970     _negative_ new size of the send buffer. Getting the buffer, a
00971     receiver unpacks one integer and checks whether it is <0 . If so,
00972     the receiver will repeat receiving, but first it checks whether
00973     it has enough buffer and increase it, if necessary.
00974     Initialization PF_longMultiRoot is made by the function
00975     PF_longMultiReset(). In the begin of the first chunk it packs
00976     one integer -- the number 1. Upon sending, the program checks,
00977     how many cells were packed (PF_longPackN). If more than 1, the
00978     sender packs to the next cell the integer PF_longPackN, than
00979     packs PF_longPackN pairs of integers -- the information about how many
00980     times chunk on each cell was accessed by the packing procedure,
00981     this information is contained by the nPacks field of the cell
00982     structure, and how many non-complete items was at the end of this
00983     chunk the structure field lastLen. Then the sender sends first
00984     this auxiliary chunk.
00985     The receiver unpacks the integer from obtained chunk and, if this
00986     integer is more than 1, it gets more chunks, unpacking information
00987     from the first auxiliary chunk into the corresponding nPacks
00988     fields. Unpacking information from multiple chunks, the receiver
00989     knows, when the chunk is expired and it must switch to the next cell,
00990     successively decrementing corresponding nPacks field.
00991
00992     XXX: There are still some flaws:
00993     PF_LongSingleSend/PF_LongSingleReceive may fail, for example, for data
00994     transfers from the master to many slaves. Suppose that the master sends big
00995     data to slaves, which needs an increase of the buffer of the receivers. For
00996     the first data transfer, the master sends the new buffer size as the first
00997     message, and then sends the data as the second message, because
00998     PF_LongSinglePack records the increase of the buffer size on the master. For
00999     the next time, however, the master sends the data without sending the new
01000     buffer size, and then MPI_Recv fails due to the data overflow.
01001     In parallel.c, they are used for the communication from slaves to the
01002     master. In this case, this problem does not occur because the master always
01003     has enough buffer.
01004     The maximum size that PF_LongMultiBroadcast can broadcast is limited to
01005     around 320kB because the current implementation tries to pack all
01006     information of chained buffers into one buffer, whose size is PF_packsize
01007     = 1600B.
01008
01009     #] Explanations :
01010     #[ Variables :
01011 */
01012
01013 typedef struct longMultiStruct {
01014     UBYTE *buffer; /* NULL if */
01015     int bufpos; /* if >=0, PF_longPackBuf+bufpos is the chunk start */
01016     int packpos; /* the current position */
01017     int nPacks; /* How many times PF_longPack operates on this cell */
01018     int lastLen; /* if > 0, the last packing didn't fit completely to this
01019                  chunk, only lastLen items was packed, the rest is in
01020                  the next cell. */
01021     struct longMultiStruct *next; /* next linked cell, or NULL */
01022 } PF_LONGMULTI;

```

```

01023
01024 static UBYTE *PF_longPackBuf = NULL;
01025 static void *PF_longPackSmallBuf = NULL;
01026 static int PF_longPackPos = 0;
01027 static int PF_longPackTop = 0;
01028 static PF_LONGMULTI *PF_longMultiRoot = NULL;
01029 static PF_LONGMULTI *PF_longMultiTop = NULL;
01030 static PF_LONGMULTI *PF_longMultiLastChunk = NULL;
01031 static int PF_longPackN = 0;
01032
01033 /*
01034     #] Variables :
01035     #[ Long pack private functions :
01036     #[ PF_longMultiNewCell :
01037 */
01038
01039 static inline int PF_longMultiNewCell(void)
01040 {
01041     /*
01042         Allocate a new cell:
01043     */
01044     PF_longMultiTop->next = (PF_LONGMULTI *)
01045         Malloc1(sizeof(PF_LONGMULTI), "PF_longMultiCell");
01046     if ( PF_longMultiTop->next == NULL ) return(-1);
01047     /*
01048         Allocate a private buffer:
01049     */
01050     PF_longMultiTop->next->buffer=(UBYTE*)
01051         Malloc1(sizeof(UBYTE)*PF_packsize, "PF_longMultiChunk");
01052     if ( PF_longMultiTop->next->buffer == NULL ) return(-1);
01053     /*
01054         For the private buffer position is -1:
01055     */
01056     PF_longMultiTop->next->bufpos = -1;
01057     /*
01058         This is the last cell in the chain:
01059     */
01060     PF_longMultiTop->next->next = NULL;
01061     /*
01062         packpos and nPacks are not initialized!
01063     */
01064     return(0);
01065 }
01066
01067 /*
01068     #] PF_longMultiNewCell :
01069     #[ PF_longMultiPack2NextCell :
01070 */
01071 static inline int PF_longMultiPack2NextCell(void)
01072 {
01073     /*
01074         Is there a free cell in the chain?
01075     */
01076     if ( PF_longMultiTop->next == NULL ) {
01077         /*
01078             No, allocate the new cell with a private buffer:
01079         */
01080         if ( PF_longMultiNewCell() ) return(-1);
01081     }
01082     /*
01083         Move to the next cell in the chain:
01084     */
01085     PF_longMultiTop = PF_longMultiTop->next;
01086     /*
01087         if >=0, the cell buffer is the chunk of PF_longPackBuf, initialize it:
01088     */
01089     if ( PF_longMultiTop->bufpos > -1 )
01090         PF_longMultiTop->buffer = PF_longPackBuf+PF_longMultiTop->bufpos;
01091     /*
01092         else -- the cell has it's own private buffer.
01093         Initialize the cell fields:
01094     */
01095     PF_longMultiTop->nPacks = 0;
01096     PF_longMultiTop->lastLen = 0;
01097     PF_longMultiTop->packpos = 0;
01098     return(0);
01099 }
01100
01101 /*
01102     #] PF_longMultiPack2NextCell :
01103     #[ PF_longMultiNewChunkAdded :
01104 */
01105
01106 static inline int PF_longMultiNewChunkAdded(int n)
01107 {
01108     /*
01109         Store the list tail:

```

```

01110 */
01111 PF_LONGMULTI *MemCell = PF_longMultiLastChunk->next;
01112 int pos = PF_longPackTop;
01113
01114 while ( n-- > 0 ) {
01115 /*
01116     Allocate a new cell:
01117 */
01118     PF_longMultiLastChunk->next = (PF_LONGMULTI *)
01119         Malloc1(sizeof(PF_LONGMULTI), "PF_longMultiCell");
01120     if ( PF_longMultiLastChunk->next == NULL ) return(-1);
01121 /*
01122     Update the Last Chunk Pointer:
01123 */
01124     PF_longMultiLastChunk = PF_longMultiLastChunk->next;
01125 /*
01126     Initialize the new cell:
01127 */
01128     PF_longMultiLastChunk->bufpos = pos;
01129     pos += PF_packsize;
01130     PF_longMultiLastChunk->buffer = NULL;
01131     PF_longMultiLastChunk->packpos = 0;
01132     PF_longMultiLastChunk->nPacks = 0;
01133     PF_longMultiLastChunk->lastLen = 0;
01134 }
01135 /*
01136     Hitch the tail:
01137 */
01138 PF_longMultiLastChunk->next = MemCell;
01139 return(0);
01140 }
01141
01142 /*
01143     #] PF_longMultiNewChunkAdded :
01144     #[ PF_longCopyChunk :
01145 */
01146
01147 static inline void PF_longCopyChunk(int *to, int *from, int n)
01148 {
01149     NCOPYI(to, from, n)
01150 /* for ( ; n > 0; n-- ) *to++ = *from++; */
01151 }
01152
01153 /*
01154     #] PF_longCopyChunk :
01155     #[ PF_longAddChunk :
01156
01157     The chunk must be increased by n*PF_packsize.
01158 */
01159
01160 static int PF_longAddChunk(int n, int mustRealloc)
01161 {
01162     UBYTE *newbuf;
01163     if ( ( newbuf = (UBYTE*)Malloc1(sizeof(UBYTE)*(PF_longPackTop+n*PF_packsize),
01164         "PF_longPackBuf") ) == NULL ) return(-1);
01165 /*
01166     Allocate and chain a new cell for longMulti:
01167 */
01168 if ( PF_longMultiNewChunkAdded(n) ) return(-1);
01169 /*
01170     Copy the content to the new buffer:
01171 */
01172 if ( mustRealloc ) {
01173     PF_longCopyChunk((int*)newbuf, (int*)PF_longPackBuf, PF_longPackTop/sizeof(int));
01174 }
01175 /*
01176     Note, PF_packsize is multiple by sizeof(int) by construction!
01177 */
01178 PF_longPackTop += (n*PF_packsize);
01179 /*
01180     Free the old buffer and store the new one:
01181 */
01182 M_free(PF_longPackBuf, "PF_longPackBuf");
01183 PF_longPackBuf = newbuf;
01184 /*
01185     Count number of re-allocs:
01186 */
01187 PF_longPackN += n;
01188 return(0);
01189 }
01190
01191 /*
01192     #] PF_longAddChunk :
01193     #[ PF_longMultiHowSplit :
01194
01195     "count" of "type" elements in an input buffer occupy "bytes" bytes.
01196     We know from the algorithm, that it is too many. How to split

```

```

01197     the buffer so that the head fits to rest of a storage buffer?*/
01198 static inline int PF_longMultiHowSplit(int count, MPI_Datatype type, int bytes)
01199 {
01200     int ret, items, totalbytes;
01201
01202     if ( count < 2 ) return(0); /* Nothing to split */
01203 /*
01204     A rest of a storage buffer:
01205 */
01206     totalbytes = PF_packsize - PF_longMultiTop->packpos;
01207 /*
01208     Rough estimate:
01209 */
01210     items = (int)((double)totalbytes*count/bytes);
01211 /*
01212     Go to the up limit:
01213 */
01214     do {
01215         if ( ( ret = MPI_Pack_size(++items,type,PF_COMM,&bytes) )
01216             !=MPI_SUCCESS ) return(ret);
01217     } while ( bytes < totalbytes );
01218 /*
01219     Now the value of "items" is too large
01220     And now evaluate the exact value:
01221 */
01222     do {
01223         if ( ( ret = MPI_Pack_size(--items,type,PF_COMM,&bytes) )
01224             !=MPI_SUCCESS ) return(ret);
01225         if ( items == 0 ) /* Nothing about MPI_Pack_size(0) == 0 in standards! */
01226             return(0);
01227     } while ( bytes > totalbytes );
01228     return(items);
01229 }
01230 /*
01231     #] PF_longMultiHowSplit :
01232     #[ PF_longPackInit :
01233 */
01234
01235 static int PF_longPackInit(void)
01236 {
01237     int ret;
01238     PF_longPackBuf = (UBYTE*)Malloc1(sizeof(UBYTE)*PF_packsize,"PF_longPackBuf");
01239     if ( PF_longPackBuf == NULL ) return(-1);
01240 /*
01241     PF_longPackTop is not initialized yet, use in as a return value:
01242 */
01243     ret = MPI_Pack_size(1,MPI_INT,PF_COMM,&PF_longPackTop);
01244     if ( ret != MPI_SUCCESS ) return(ret);
01245
01246     PF_longPackSmallBuf =
01247         (void*)Malloc1(sizeof(UBYTE)*PF_longPackTop,"PF_longPackSmallBuf");
01248
01249     PF_longPackTop = PF_packsize;
01250     PF_longMultiRoot =
01251         (PF_LONGMULTI *)Malloc1(sizeof(PF_LONGMULTI),"PF_longMultiRoot");
01252     if ( PF_longMultiRoot == NULL ) return(-1);
01253     PF_longMultiRoot->bufpos = 0;
01254     PF_longMultiRoot->buffer = NULL;
01255     PF_longMultiRoot->next = NULL;
01256     PF_longMultiLastChunk = PF_longMultiRoot;
01257
01258     PF_longPackPos = 0;
01259     PF_longMultiRoot->packpos = 0;
01260     PF_longMultiTop = PF_longMultiRoot;
01261     PF_longPackN = 1;
01262     return(0);
01263 }
01264
01265 /*
01266     #] PF_longPackInit :
01267     #[ PF_longMultiPreparePrefix :
01268 */
01269
01270 static inline int PF_longMultiPreparePrefix(void)
01271 {
01272     int ret;
01273     PF_LONGMULTI *thePrefix;
01274     int i = PF_longPackN;
01275 /*
01276     Here we have PF_longPackN>1!
01277     New cell (at the list end) to create the auxiliary chunk:
01278 */
01279     if ( PF_longMultiPack2NextCell() ) return(-1);
01280 /*
01281     Store the pointer to the chunk we will proceed:
01282 */
01283     thePrefix = PF_longMultiTop;

```

```

01284 /*
01285     Pack PF_longPackN:
01286 */
01287     ret = MPI_Pack(&(PF_longPackN),
01288                   1,
01289                   MPI_INT,
01290                   thePrefix->buffer,
01291                   PF_packsize,
01292                   &(thePrefix->packpos),
01293                   PF_COMM);
01294     if ( ret != MPI_SUCCESS ) return(ret);
01295 /*
01296     And start from the beginning:
01297 */
01298     for ( PF_longMultiTop = PF_longMultiRoot; i > 0; i-- ) {
01299 /*
01300     Pack number of Pack hits:
01301 */
01302         ret = MPI_Pack(&(PF_longMultiTop->nPacks),
01303                       1,
01304                       MPI_INT,
01305                       thePrefix->buffer,
01306                       PF_packsize,
01307                       &(thePrefix->packpos),
01308                       PF_COMM);
01309 /*
01310     Pack the length of the last fit portion:
01311 */
01312         ret |= MPI_Pack(&(PF_longMultiTop->lastLen),
01313                       1,
01314                       MPI_INT,
01315                       thePrefix->buffer,
01316                       PF_packsize,
01317                       &(thePrefix->packpos),
01318                       PF_COMM);
01319 /*
01320     Check the size -- not necessary, MPI_Pack did it.
01321 */
01322         if ( ret != MPI_SUCCESS ) return(ret);
01323 /*
01324     Go to the next cell:
01325 */
01326         PF_longMultiTop = PF_longMultiTop->next;
01327     }
01328     PF_longMultiTop = thePrefix;
01329 /*
01330     PF_longMultiTop is ready!
01331 */
01332     return(0);
01333 }
01334 }
01335
01336 /*
01337     #] PF_longMultiPreparePrefix :
01338     #[ PF_longMultiProcessPrefix :
01339 */
01340
01341 static inline int PF_longMultiProcessPrefix(void)
01342 {
01343     int ret,i;
01344 /*
01345     We have PF_longPackN records packed in PF_longMultiRoot->buffer,
01346     pairs nPacks and lastLen. Loop through PF_longPackN cells,
01347     unpacking these integers into proper fields:
01348 */
01349     for ( PF_longMultiTop = PF_longMultiRoot, i = 0; i < PF_longPackN; i++ ) {
01350 /*
01351     Go to th next cell, allocating, when necessary:
01352 */
01353         if ( PF_longMultiPack2NextCell() ) return(-1);
01354 /*
01355     Unpack the number of Pack hits:
01356 */
01357         ret = MPI_Unpack(PF_longMultiRoot->buffer,
01358                         PF_packsize,
01359                         &( PF_longMultiRoot->packpos),
01360                         &(PF_longMultiTop->nPacks),
01361                         1,
01362                         MPI_INT,
01363                         PF_COMM);
01364         if ( ret != MPI_SUCCESS ) return(ret);
01365 /*
01366     Unpack the length of the last fit portion:
01367 */
01368         ret = MPI_Unpack(PF_longMultiRoot->buffer,
01369                         PF_packsize,
01370                         &( PF_longMultiRoot->packpos),

```

```

01371             &(PF_longMultiTop->lastLen),
01372             1,
01373             MPI_INT,
01374             PF_COMM);
01375         if ( ret != MPI_SUCCESS ) return(ret);
01376     }
01377     return(0);
01378 }
01379
01380 /*
01381     #] PF_longMultiProcessPrefix :
01382     #[ PF_longSingleReset :
01383 */
01384
01392 static inline int PF_longSingleReset(int is_sender)
01393 {
01394     int ret;
01395     PF_longPackPos=0;
01396     if ( is_sender ) {
01397         ret = MPI_Pack(&PF_longPackTop,1,MPI_INT,
01398             PF_longPackBuf,PF_longPackTop,&PF_longPackPos,PF_COMM);
01399         if ( ret != MPI_SUCCESS ) return(ret);
01400         PF_longPackN = 1;
01401     }
01402     else {
01403         PF_longPackN=0;
01404     }
01405     return(0);
01406 }
01407
01408 /*
01409     #] PF_longSingleReset :
01410     #[ PF_longMultiReset :
01411 */
01412
01420 static inline int PF_longMultiReset(int is_sender)
01421 {
01422     int ret = 0, theone = 1;
01423     PF_longMultiRoot->packpos = 0;
01424     if ( is_sender ) {
01425         ret = MPI_Pack(&theone,1,MPI_INT,
01426             PF_longPackBuf,PF_longPackTop,&(PF_longMultiRoot->packpos),PF_COMM);
01427         PF_longPackN = 1;
01428     }
01429     else {
01430         PF_longPackN = 0;
01431     }
01432     PF_longMultiRoot->nPacks = 0; /* The auxiliary field is not counted */
01433     PF_longMultiRoot->lastLen = 0;
01434     PF_longMultiTop = PF_longMultiRoot;
01435     PF_longMultiRoot->buffer = PF_longPackBuf;
01436     return ret;
01437 }
01438
01439 /*
01440     #] PF_longMultiReset :
01441     #] Long pack private functions :
01442     #[ PF_PrepareLongSinglePack :
01443 */
01444
01451 int PF_PrepareLongSinglePack(void)
01452 {
01453     return PF_longSingleReset(1);
01454 }
01455
01456 /*
01457     #] PF_PrepareLongSinglePack :
01458     #[ PF_LongSinglePack :
01459 */
01460
01469 int PF_LongSinglePack(const void *buffer, size_t count, MPI_Datatype type)
01470 {
01471     int ret, bytes;
01472     /* XXX: Limited by int size. */
01473     if ( count > INT_MAX ) return -99;
01474     ret = MPI_Pack_size((int)count,type,PF_COMM,&bytes);
01475     if ( ret != MPI_SUCCESS ) return(ret);
01476
01477     while ( PF_longPackPos+bytes > PF_longPackTop ) {
01478         if ( PF_longAddChunk(1, 1) ) return(-1);
01479     }
01480     /*
01481         PF_longAddChunk(1, 1) means, the chunk must
01482         be increased by 1 and re-allocated
01483     */
01484     ret = MPI_Pack((void *)buffer,(int)count,type,
01485         PF_longPackBuf,PF_longPackTop,&PF_longPackPos,PF_COMM);

```



```

01486     if ( ret != MPI_SUCCESS ) return(ret);
01487     return(0);
01488 }
01489
01490 /*
01491     #] PF_LongSinglePack :
01492     #[ PF_LongSingleUnpack :
01493 */
01494
01503 int PF_LongSingleUnpack(void *buffer, size_t count, MPI_Datatype type)
01504 {
01505     int ret;
01506     /* XXX: Limited by int size. */
01507     if ( count > INT_MAX ) return -99;
01508     ret = MPI_Unpack(PF_longPackBuf, PF_longPackTop, &PF_longPackPos,
01509                     buffer, (int)count, type, PF_COMM);
01510     if ( ret != MPI_SUCCESS ) return(ret);
01511     return(0);
01512 }
01513
01514 /*
01515     #] PF_LongSingleUnpack :
01516     #[ PF_LongSingleSend :
01517 */
01518
01540 int PF_LongSingleSend(int to, int tag)
01541 {
01542     int ret, pos = 0;
01543     /*
01544         Note, here we assume that this function couldn't be used
01545         with to == PF_ANY_SOURCE!
01546     */
01547     if ( PF_longPackN > 1 ) {
01548         /* The buffer was incremented, pack send the new size first: */
01549         int tmp = -PF_longPackTop;
01550         /*
01551             Negative value means there will be the second buffer
01552         */
01553         ret = MPI_Pack(&tmp, 1, PF_INT,
01554                       PF_longPackSmallBuf, PF_longPackTop, &pos, PF_COMM);
01555         if ( ret != MPI_SUCCESS ) return(ret);
01556         ret = MPI_Ssend(PF_longPackSmallBuf, pos, MPI_PACKED, to, tag, PF_COMM);
01557         if ( ret != MPI_SUCCESS ) return(ret);
01558     }
01559     ret = MPI_Ssend(PF_longPackBuf, PF_longPackPos, MPI_PACKED, to, tag, PF_COMM);
01560     if ( ret != MPI_SUCCESS ) return(ret);
01561     return(0);
01562 }
01563
01564 /*
01565     #] PF_LongSingleSend :
01566     #[ PF_LongSingleReceive :
01567 */
01568
01583 int PF_LongSingleReceive(int src, int tag, int *psrc, int *ptag)
01584 {
01585     int ret, missed, oncemore;
01586     MPI_Status status;
01587     PF_longSingleReset(0);
01588     do {
01589         ret = MPI_Recv(PF_longPackBuf, PF_longPackTop, MPI_PACKED, src, tag,
01590                       PF_COMM, &status);
01591         if ( ret != MPI_SUCCESS ) return(ret);
01592     /*
01593         The source and tag must be specified here for the case if
01594         MPI_Recv is performed more than once:
01595     */
01596         src = status.MPI_SOURCE;
01597         tag = status.MPI_TAG;
01598         if ( psrc ) *psrc = status.MPI_SOURCE;
01599         if ( ptag ) *ptag = status.MPI_TAG;
01600     /*
01601         Now we got either small buffer with the new PF_longPackTop,
01602         or just a regular chunk.
01603     */
01604         ret = MPI_Unpack(PF_longPackBuf, PF_longPackTop, &PF_longPackPos,
01605                           &missed, 1, MPI_INT, PF_COMM);
01606         if ( ret != MPI_SUCCESS ) return(ret);
01607     /*
01608         if ( missed < 0 ) { /* The small buffer was received. */
01609             oncemore = 1; /* repeat receiving afterwards */
01610             /* Reallocate the buffer and get the data */
01611             missed = -missed;
01612         */
01613         /*
01614             restore after unpacking small from buffer:
01615         */
01615         PF_longPackPos = 0;

```

```

01616     }
01617     else {
01618         oncemore = 0; /* That's all, no repetition */
01619     }
01620     if ( missed > PF_longPackTop ) {
01621         /*
01622          * The room must be increased. We need a re-allocation for the
01623          * case that there is no repetition.
01624          */
01625         if ( PF_longAddChunk( (missed-PF_longPackTop)/PF_packsize, !oncemore ) )
01626             return(-1);
01627     }
01628     } while ( oncemore );
01629     return(0);
01630 }
01631
01632 /*
01633      #] PF_LongSingleReceive :
01634      #[ PF_PrepareLongMultiPack :
01635 */
01636
01643 int PF_PrepareLongMultiPack(void)
01644 {
01645     return PF_longMultiReset(1);
01646 }
01647
01648 /*
01649      #] PF_PrepareLongMultiPack :
01650      #[ PF_LongMultiPackImpl :
01651 */
01652
01662 int PF_LongMultiPackImpl(const void*buffer, size_t count, size_t eSize, MPI_Datatype type)
01663 {
01664     int ret, items;
01665
01666     /* XXX: Limited by int size. */
01667     if ( count > INT_MAX ) return -99;
01668
01669     ret = MPI_Pack_size((int)count,type,PF_COMM,&items);
01670     if ( ret != MPI_SUCCESS ) return(ret);
01671
01672     if ( PF_longMultiTop->packpos + items <= PF_packsize ) {
01673         ret = MPI_Pack((void *)buffer,(int)count,type,PF_longMultiTop->buffer,
01674                       PF_packsize,&(PF_longMultiTop->packpos),PF_COMM);
01675         if ( ret != MPI_SUCCESS ) return(ret);
01676         PF_longMultiTop->nPacks++;
01677         return(0);
01678     }
01679     /*
01680      The data do not fit to the rest of the buffer.
01681      There are two possibilities here: go to the next cell
01682      immediately, or first try to pack some portion. The function
01683      PF_longMultiHowSplit() returns the number of items could be
01684      packed in the end of the current cell:
01685     */
01686     if ( ( items = PF_longMultiHowSplit((int)count,type,items) ) < 0 ) return(items);
01687
01688     if ( items > 0 ) { /* store the head */
01689         ret = MPI_Pack((void *)buffer,items,type,PF_longMultiTop->buffer,
01690                       PF_packsize,&(PF_longMultiTop->packpos),PF_COMM);
01691         if ( ret != MPI_SUCCESS ) return(ret);
01692         PF_longMultiTop->nPacks++;
01693         PF_longMultiTop->lastLen = items;
01694     }
01695     /*
01696      Now the rest should be packed to the new cell.
01697      Slide to the new cell:
01698     */
01699     if ( PF_longMultiPack2NextCell() ) return(-1);
01700     PF_longPackN++;
01701     /*
01702      Pack the rest to the next cell:
01703     */
01704     return(PF_LongMultiPackImpl((char *)buffer+items*eSize,count-items,eSize,type));
01705 }
01706
01707 /*
01708      #] PF_LongMultiPackImpl :
01709      #[ PF_LongMultiUnpackImpl :
01710 */
01711
01721 int PF_LongMultiUnpackImpl(void *buffer, size_t count, size_t eSize, MPI_Datatype type)
01722 {
01723     int ret;
01724
01725     /* XXX: Limited by int size. */
01726     if ( count > INT_MAX ) return -99;

```

```

01727
01728     if ( PF_longPackN < 2 ) { /* Just unpack the buffer from the single cell */
01729         ret = MPI_Unpack(
01730             PF_longMultiTop->buffer,
01731             PF_packsize,
01732             &(PF_longMultiTop->packpos),
01733             buffer,
01734             count,type,PF_COMM);
01735         if ( ret != MPI_SUCCESS ) return(ret);
01736         return(0);
01737     }
01738     /*
01739         More than one cell is in use.
01740     */
01741     if ( ( PF_longMultiTop->nPacks > 1 ) /* the cell is not expired */
01742         || /* The last cell contains exactly required portion: */
01743         ( ( PF_longMultiTop->nPacks == 1 ) && ( PF_longMultiTop->lastLen == 0 ) )
01744     ) { /* Just unpack the buffer from the current cell */
01745         ret = MPI_Unpack(
01746             PF_longMultiTop->buffer,
01747             PF_packsize,
01748             &(PF_longMultiTop->packpos),
01749             buffer,
01750             count,type,PF_COMM);
01751         if ( ret != MPI_SUCCESS ) return(ret);
01752         (PF_longMultiTop->nPacks)--;
01753         return(0);
01754     }
01755     if ( ( PF_longMultiTop->nPacks == 1 ) && ( PF_longMultiTop->lastLen != 0 ) ) {
01756         /*
01757             Unpack the head:
01758         */
01759         ret = MPI_Unpack(
01760             PF_longMultiTop->buffer,
01761             PF_packsize,
01762             &(PF_longMultiTop->packpos),
01763             buffer,
01764             PF_longMultiTop->lastLen,type,PF_COMM);
01765         if ( ret != MPI_SUCCESS ) return(ret);
01766         /*
01767             Decrement the counter by read items:
01768         */
01769         count -= PF_longMultiTop->lastLen;
01770         if ( count <= 0 ) return(-1); /*Something is wrong! */
01771         /*
01772             Shift the output buffer position:
01773         */
01774         buffer = (char *)buffer + PF_longMultiTop->lastLen * eSize;
01775         (PF_longMultiTop->nPacks)--;
01776     }
01777     /*
01778         Here PF_longMultiTop->nPacks == 0
01779     */
01780     if ( ( PF_longMultiTop = PF_longMultiTop->next ) == NULL ) return(-1);
01781     return(PF_LongMultiUnpackImpl(buffer,count,eSize,type));
01782 }
01783
01784 /*
01785     #] PF_LongMultiUnpackImpl :
01786     #[ PF_LongMultiBroadcast :
01787 */
01788
01807 int PF_LongMultiBroadcast(void)
01808 {
01809     int ret, i;
01810
01811     if ( PF.me == MASTER ) {
01812         /*
01813             PF_longPackN is the number of packed chunks. If it is more
01814             than 1, we have to pack a new one and send it first
01815         */
01816         if ( PF_longPackN > 1 ) {
01817             if ( PF_longMultiPreparePrefix() ) return(-1);
01818             ret = MPI_Bcast((void*)PF_longMultiTop->buffer,
01819                             PF_packsize,MPI_PACKED,MASTER,PF_COMM);
01820             if ( ret != MPI_SUCCESS ) return(ret);
01821         }
01822         /*
01823             PF_longPackN was not incremented by PF_longMultiPreparePrefix()!
01824         */
01825     }
01826     /*
01827         Now we start from the beginning:
01828     */
01829     PF_longMultiTop = PF_longMultiRoot;
01830     /*
01831         Just broadcast all the chunks:
01832     */

```

```

01832         for ( i = 0; i < PF_longPackN; i++ ) {
01833             ret = MPI_Bcast((void*)PF_longMultiTop->buffer,
01834                             PF_packsize,MPI_PACKED,MASTER,PF_COMM);
01835             if ( ret != MPI_SUCCESS ) return(ret);
01836             PF_longMultiTop = PF_longMultiTop->next;
01837         }
01838         return(0);
01839     }
01840     /*
01841         else - the slave
01842     */
01843     PF_longMultiReset(0);
01844     /*
01845         Get the first chunk; it can be either the only data chunk, or
01846         an auxiliary chunk, if the data do not fit the single chunk:
01847     */
01848     ret = MPI_Bcast((void*)PF_longMultiRoot->buffer,
01849                     PF_packsize,MPI_PACKED,MASTER,PF_COMM);
01850     if ( ret != MPI_SUCCESS ) return(ret);
01851
01852     ret = MPI_Unpack((void*)PF_longMultiRoot->buffer,
01853                     PF_packsize,
01854                     &(PF_longMultiRoot->packpos),
01855                     &PF_longPackN,1,MPI_INT,PF_COMM);
01856     if ( ret != MPI_SUCCESS ) return(ret);
01857     /*
01858         Now in PF_longPackN we have the number of cells used
01859         for broadcasting. If it is >1, then we have to allocate
01860         enough cells, initialize them and receive all the chunks.
01861     */
01862     if ( PF_longPackN < 2 ) /* That's all, the single chunk is received. */
01863         return(0);
01864     /*
01865         Here we have to get PF_longPackN chunks. But, first,
01866         initialize cells by info from the received auxiliary chunk.
01867     */
01868     if ( PF_longMultiProcessPrefix() ) return(-1);
01869     /*
01870         Now we have free PF_longPackN cells, starting
01871         from PF_longMultiRoot->next, with properly initialized
01872         nPacks and lastLen fields. Get chunks:
01873     */
01874     for ( PF_longMultiTop = PF_longMultiRoot->next, i = 0; i < PF_longPackN; i++ ) {
01875         ret = MPI_Bcast((void*)PF_longMultiTop->buffer,
01876                         PF_packsize,MPI_PACKED,MASTER,PF_COMM);
01877         if ( ret != MPI_SUCCESS ) return(ret);
01878         if ( i == 0 ) { /* The first chunk, it contains extra "1". */
01879             int tmp;
01880             /*
01881                 Extract this 1 into tmp and forget about it.
01882             */
01883             ret = MPI_Unpack((void*)PF_longMultiTop->buffer,
01884                             PF_packsize,
01885                             &(PF_longMultiTop->packpos),
01886                             &tmp,1,MPI_INT,PF_COMM);
01887             if ( ret != MPI_SUCCESS ) return(ret);
01888         }
01889         PF_longMultiTop = PF_longMultiTop->next;
01890     }
01891     /*
01892         multiUnPack starts with PF_longMultiTop, skip auxiliary chunk in
01893         PF_longMultiRoot:
01894     */
01895     PF_longMultiTop = PF_longMultiRoot->next;
01896     return(0);
01897 }
01898
01899 /*
01900     #] PF_LongMultiBroadcast :
01901     #] Long pack stuff :
01902 */

```

4.83 mpidbg.h File Reference


```

#include <stdarg.h>
#include <stdio.h>
#include <string.h>

```

```
#include <mpi.h>
```

Include dependency graph for mpidbg.h:

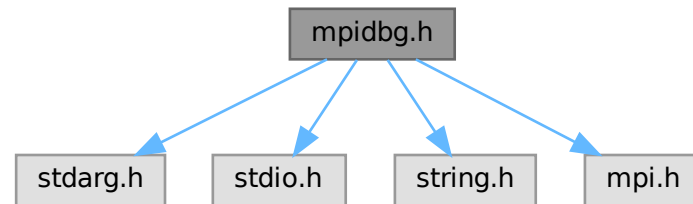

Macros

- #define [MPIDBG_RANK](#) MPIDBG_Get_rank()
- #define [MPIDBG_Out\(...\)](#) MPIDBG_Out(file, line, func, __VA_ARGS__)
- #define [MPIDBG_EXTARG](#) const char *file, int line, const char *func
- #define [MPI_Send\(...\)](#) MPIDBG_Send(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Recv\(...\)](#) MPIDBG_Recv(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Bsend\(...\)](#) MPIDBG_Bsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Ssend\(...\)](#) MPIDBG_Ssend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Rsend\(...\)](#) MPIDBG_Rsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Isend\(...\)](#) MPIDBG_Isend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Ibsend\(...\)](#) MPIDBG_Ibsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Issend\(...\)](#) MPIDBG_Issend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Irsend\(...\)](#) MPIDBG_Irsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Irecv\(...\)](#) MPIDBG_Irecv(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Wait\(...\)](#) MPIDBG_Wait(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Test\(...\)](#) MPIDBG_Test(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Waitany\(...\)](#) MPIDBG_Waitany(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Testany\(...\)](#) MPIDBG_Testany(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Waitall\(...\)](#) MPIDBG_Waitall(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Testall\(...\)](#) MPIDBG_Testall(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Waitsome\(...\)](#) MPIDBG_Waitsome(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Testsome\(...\)](#) MPIDBG_Testsome(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Iprobe\(...\)](#) MPIDBG_Iprobe(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Probe\(...\)](#) MPIDBG_Probe(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Cancel\(...\)](#) MPIDBG_Cancel(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Test_cancelled\(...\)](#) MPIDBG_Test_cancelled(__VA_ARGS__, __FILE__, __LINE__, __func__↵
_)
- #define [MPI_Barrier\(...\)](#) MPIDBG_Barrier(__VA_ARGS__, __FILE__, __LINE__, __func__)
- #define [MPI_Bcast\(...\)](#) MPIDBG_Bcast(__VA_ARGS__, __FILE__, __LINE__, __func__)

4.83.1 Detailed Description

MPI APIs with the logging feature. NOTE: This file needs C99.

Definition in file [mpidbg.h](#).

4.83.2 Macro Definition Documentation

4.83.2.1 MPIDBG_RANK

```
#define MPIDBG_RANK MPIDBG_Get_rank()
```

Definition at line 55 of file [mpidbg.h](#).

4.83.2.2 MPIDBG_Out

```
#define MPIDBG_Out(  
    ... ) MPIDBG_Out(file, line, func, __VA_ARGS__)
```

Definition at line 72 of file [mpidbg.h](#).

4.83.2.3 MPIDBG_EXTARG

```
#define MPIDBG_EXTARG const char *file, int line, const char *func
```

Definition at line 139 of file [mpidbg.h](#).

4.83.2.4 MPI_Send

```
#define MPI_Send(  
    ... ) MPIDBG_Send(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 157 of file [mpidbg.h](#).

4.83.2.5 MPI_Recv

```
#define MPI_Recv(  
    ... ) MPIDBG_Recv(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 178 of file [mpidbg.h](#).

4.83.2.6 MPI_Bsend

```
#define MPI_Bsend(  
    ... ) MPIDBG_Bsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 197 of file [mpidbg.h](#).

4.83.2.7 MPI_Ssend

```
#define MPI_Ssend(  
    ... ) MPIDBG_Ssend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 216 of file [mpidbg.h](#).

4.83.2.8 MPI_Rsend

```
#define MPI_Rsend(  
    ... ) MPIDBG_Rsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 235 of file [mpidbg.h](#).

4.83.2.9 MPI_Isend

```
#define MPI_Isend(  
    ... ) MPIDBG_Isend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 254 of file [mpidbg.h](#).

4.83.2.10 MPI_Ibsend

```
#define MPI_Ibsend(  
    ... ) MPIDBG_Ibsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 273 of file [mpidbg.h](#).

4.83.2.11 MPI_Issend

```
#define MPI_Issend(  
    ... ) MPIDBG_Issend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 292 of file [mpidbg.h](#).

4.83.2.12 MPI_Irsend

```
#define MPI_Irsend(  
    ... ) MPIDBG_Irsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 311 of file [mpidbg.h](#).

4.83.2.13 MPI_Irecv

```
#define MPI_Irecv(  
    ... ) MPIDBG_Irecv(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 330 of file [mpidbg.h](#).

4.83.2.14 MPI_Wait

```
#define MPI_Wait(  
    ... ) MPIDBG_Wait(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 353 of file [mpidbg.h](#).

4.83.2.15 MPI_Test

```
#define MPI_Test(  
    ... ) MPIDBG_Test(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 381 of file [mpidbg.h](#).

4.83.2.16 MPI_Waitany

```
#define MPI_Waitany(  
    ... ) MPIDBG_Waitany(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 407 of file [mpidbg.h](#).

4.83.2.17 MPI_Testany

```
#define MPI_Testany(  
    ... ) MPIDBG_Testany(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 438 of file [mpidbg.h](#).

4.83.2.18 MPI_Waitall

```
#define MPI_Waitall(  
    ... ) MPIDBG_Waitall(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 462 of file [mpidbg.h](#).

4.83.2.19 MPI_Testall

```
#define MPI_Testall(  
    ... ) MPIDBG_Testall(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 491 of file [mpidbg.h](#).

4.83.2.20 MPI_Waitsome

```
#define MPI_Waitsome(  
    ... ) MPIDBG_Waitsome(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 515 of file [mpidbg.h](#).

4.83.2.21 MPI_Testsome

```
#define MPI_Testsome(  
    ... ) MPIDBG_Testsome(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 539 of file [mpidbg.h](#).

4.83.2.22 MPI_Iprobe

```
#define MPI_Iprobe(  
    ... ) MPIDBG_Iprobe(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 565 of file [mpidbg.h](#).

4.83.2.23 MPI_Probe

```
#define MPI_Probe(  
    ... ) MPIDBG_Probe(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 586 of file [mpidbg.h](#).

4.83.2.24 MPI_Cancel

```
#define MPI_Cancel(  
    ... ) MPIDBG_Cancel(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 605 of file [mpidbg.h](#).

4.83.2.25 MPI_Test_cancelled

```
#define MPI_Test_cancelled(  
    ... ) MPIDBG_Test_cancelled(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 629 of file [mpidbg.h](#).

4.83.2.26 MPI_Barrier

```
#define MPI_Barrier(  
    ... ) MPIDBG_Barrier(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 648 of file [mpidbg.h](#).

4.83.2.27 MPI_Bcast

```
#define MPI_Bcast(  
    ... ) MPIDBG_Bcast(__VA_ARGS__, __FILE__, __LINE__, __func__)
```

Definition at line 667 of file [mpidbg.h](#).

4.84 mpidbg.h

[Go to the documentation of this file.](#)

```

00001 #ifndef MPIDBG_H
00002 #define MPIDBG_H
00003
00010 /* #[] License : */
00011 /*
00012  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00013  * When using this file you are requested to refer to the publication
00014  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00015  * This is considered a matter of courtesy as the development was paid
00016  * for by FOM the Dutch physics granting agency and we would like to
00017  * be able to track its scientific use to convince FOM of its value
00018  * for the community.
00019  *
00020  * This file is part of FORM.
00021  *
00022  * FORM is free software: you can redistribute it and/or modify it under the
00023  * terms of the GNU General Public License as published by the Free Software
00024  * Foundation, either version 3 of the License, or (at your option) any later
00025  * version.
00026  *
00027  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00028  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00029  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00030  * details.
00031  *
00032  * You should have received a copy of the GNU General Public License along
00033  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00034 */
00035 /* #[] License : */
00036
00037 /*
00038  #[] Includes :
00039 */
00040
00041 #include <stdarg.h>
00042 #include <stdio.h>
00043 #include <string.h>
00044 #include <mpi.h>
00045
00046 /*
00047  #[] Includes :
00048  #[] Utilities :
00049  #[] MPIDBG_RANK :
00050 */
00051
00052 static inline int MPIDBG_Get_rank(void) {
00053     return PF.me; /* Assume we are working with ParFORM. */
00054 }
00055 #define MPIDBG_RANK MPIDBG_Get_rank()
00056
00057 /*
00058  #[] MPIDBG_RANK :
00059  #[] MPIDBG_Out :
00060 */
00061
00062 static inline void MPIDBG_Out(const char *file, int line, const char *func, const char *fmt, ...) {
00063     char buf[1024]; /* Enough. */
00064     va_list ap;
00065     va_start(ap, fmt);
00066     snprintf(buf, 1024, "*** [%d] %10s %4d @ %-16s: ", MPIDBG_RANK, file, line, func);
00067     vsnprintf(buf + strlen(buf), 1024 - strlen(buf), fmt, ap);
00068     va_end(ap);
00069     /* Assume fprintf with a line will work well even in multi-processes. */
00070     fprintf(stderr, "%s\n", buf);
00071 }
00072 #define MPIDBG_Out(...) MPIDBG_Out(file, line, func, __VA_ARGS__)
00073
00074 /*
00075  #[] MPIDBG_Out :
00076  #[] MPIDBG_sprint_requests :
00077 */
00078
00079 static inline void MPIDBG_sprint_requests(char *buf, int count, const MPI_Request *requests)
00080 {
00081     /* Assume sprintf never fail and returns >= 0... */
00082     buf += sprintf(buf, "(");
00083     int i, first = 1;
00084     for (i = 0; i < count; i++) {
00085         if (first) {
00086             first = 0;
00087         }
00088         else {

```

```

00089         buf += sprintf(buf, ",");
00090     }
00091     if ( requests[i] != MPI_REQUEST_NULL ) {
00092         buf += sprintf(buf, "%d", i);
00093     }
00094     else {
00095         buf += sprintf(buf, "*");
00096     }
00097 }
00098 buf += sprintf(buf, " ");
00099 }
00100
00101 /*
00102     #] MPIDBG_sprint_requests :
00103     #[ MPIDBG_sprint_statuses :
00104 */
00105
00106 static inline void MPIDBG_sprint_statuses(char *buf, int count, const MPI_Request *old_requests, const
MPI_Request *new_requests, const MPI_Status *statuses)
00107 {
00108     /* Assume sprintf never fail and returns >= 0... */
00109     buf += sprintf(buf, "(");
00110     int i, first = 1;
00111     for ( i = 0; i < count; i++ ) {
00112         if ( first ) {
00113             first = 0;
00114         }
00115         else {
00116             buf += sprintf(buf, ",");
00117         }
00118         if ( old_requests[i] != MPI_REQUEST_NULL && new_requests[i] == MPI_REQUEST_NULL ) {
00119             int ret_size = 0;
00120             MPI_Get_count((MPI_Status *)&statuses[i], MPI_BYTE, &ret_size);
00121             buf += sprintf(buf, "(source=%d,tag=%d,size=%d)", statuses[i].MPI_SOURCE,
statuses[i].MPI_TAG, ret_size);
00122         } else {
00123             buf += sprintf(buf, "*");
00124         }
00125     }
00126     buf += sprintf(buf, " ");
00127 }
00128
00129 /*
00130     #] MPIDBG_sprint_statuses :
00131     #] Utilities :
00132     #[ MPI APIs :
00133 */
00134
00135 /*
00136 * The followings are the MPI APIs with the logging.
00137 */
00138
00139 #define MPIDBG_EXTARG const char *file, int line, const char *func
00140
00141 /*
00142     #[ MPI_Send :
00143 */
00144
00145 static inline int MPIDBG_Send(void *buf, int count, MPI_Datatype datatype, int dest, int tag, MPI_Comm
comm, MPIDBG_EXTARG)
00146 {
00147     MPIDBG_Out("MPI_Send: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00148     int ret = MPI_Send(buf, count, datatype, dest, tag, comm);
00149     if ( ret == MPI_SUCCESS ) {
00150         MPIDBG_Out("MPI_Send: OK");
00151     }
00152     else {
00153         MPIDBG_Out("MPI_Send: Failed");
00154     }
00155     return ret;
00156 }
00157 #define MPI_Send(...) MPIDBG_Send(__VA_ARGS__, __FILE__, __LINE__, __func__)
00158
00159 /*
00160     #] MPI_Send :
00161     #[ MPI_Recv :
00162 */
00163
00164 static inline int MPIDBG_Recv(void* buf, int count, MPI_Datatype datatype, int source, int tag,
MPI_Comm comm, MPI_Status *status, MPIDBG_EXTARG)
00165 {
00166     MPIDBG_Out("MPI_Recv: src=%d dest=%d tag=%d", source, MPIDBG_RANK, tag);
00167     int ret = MPI_Recv(buf, count, datatype, source, tag, comm, status);
00168     if ( ret == MPI_SUCCESS ) {
00169         int ret_count = 0;
00170         MPI_Get_count(status, datatype, &ret_count);
00171         MPIDBG_Out("MPI_Recv: OK src=%d dest=%d tag=%d count=%d", status->MPI_SOURCE, MPIDBG_RANK,

```

```

        status->MPI_TAG, ret_count);
00172     }
00173     else {
00174         MPIDBG_Out("MPI_Recv: Failed");
00175     }
00176     return ret;
00177 }
00178 #define MPI_Recv(...) MPIDBG_Recv(__VA_ARGS__, __FILE__, __LINE__, __func__)
00179
00180 /*
00181     #] MPI_Recv :
00182     #[ MPI_Bsend :
00183 */
00184
00185 static inline int MPIDBG_Bsend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
MPI_Comm comm, MPIDBG_EXTARG)
00186 {
00187     MPIDBG_Out("MPI_Bsend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00188     int ret = MPI_Bsend(buf, count, datatype, dest, tag, comm);
00189     if ( ret == MPI_SUCCESS ) {
00190         MPIDBG_Out("MPI_Bsend: OK");
00191     }
00192     else {
00193         MPIDBG_Out("MPI_Bsend: Failed");
00194     }
00195     return ret;
00196 }
00197 #define MPI_Bsend(...) MPIDBG_Bsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00198
00199 /*
00200     #] MPI_Bsend :
00201     #[ MPI_Ssend :
00202 */
00203
00204 static inline int MPIDBG_Ssend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
MPI_Comm comm, MPIDBG_EXTARG)
00205 {
00206     MPIDBG_Out("MPI_Ssend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00207     int ret = MPI_Ssend(buf, count, datatype, dest, tag, comm);
00208     if ( ret == MPI_SUCCESS ) {
00209         MPIDBG_Out("MPI_Ssend: OK");
00210     }
00211     else {
00212         MPIDBG_Out("MPI_Ssend: Failed");
00213     }
00214     return ret;
00215 }
00216 #define MPI_Ssend(...) MPIDBG_Ssend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00217
00218 /*
00219     #] MPI_Ssend :
00220     #[ MPI_Rsend :
00221 */
00222
00223 static inline int MPIDBG_Rsend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
MPI_Comm comm, MPIDBG_EXTARG)
00224 {
00225     MPIDBG_Out("MPI_Rsend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00226     int ret = MPI_Rsend(buf, count, datatype, dest, tag, comm);
00227     if ( ret == MPI_SUCCESS ) {
00228         MPIDBG_Out("MPI_Rsend: OK");
00229     }
00230     else {
00231         MPIDBG_Out("MPI_Rsend: Failed");
00232     }
00233     return ret;
00234 }
00235 #define MPI_Rsend(...) MPIDBG_Rsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00236
00237 /*
00238     #] MPI_Rsend :
00239     #[ MPI_Isend :
00240 */
00241
00242 static inline int MPIDBG_Isend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
MPI_Comm comm, MPI_Request *request, MPIDBG_EXTARG)
00243 {
00244     MPIDBG_Out("MPI_Isend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00245     int ret = MPI_Isend(buf, count, datatype, dest, tag, comm, request);
00246     if ( ret == MPI_SUCCESS ) {
00247         MPIDBG_Out("MPI_Isend: OK");
00248     }
00249     else {
00250         MPIDBG_Out("MPI_Isend: Failed");
00251     }
00252     return ret;
00253 }

```

```

00254 #define MPI_Isend(...) MPIDBG_Isend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00255
00256 /*
00257     #] MPI_Isend :
00258     #[ MPI_Ibsend :
00259 */
00260
00261 static inline int MPIDBG_Ibsend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
    MPI_Comm comm, MPI_Request *request, MPIDBG_EXTARG)
00262 {
00263     MPIDBG_Out("MPI_Ibsend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00264     int ret = MPI_Ibsend(buf, count, datatype, dest, tag, comm, request);
00265     if ( ret == MPI_SUCCESS ) {
00266         MPIDBG_Out("MPI_Ibsend: OK");
00267     }
00268     else {
00269         MPIDBG_Out("MPI_Ibsend: Failed");
00270     }
00271     return ret;
00272 }
00273 #define MPI_Ibsend(...) MPIDBG_Ibsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00274
00275 /*
00276     #] MPI_Ibsend :
00277     #[ MPI_Issend :
00278 */
00279
00280 static inline int MPIDBG_Issend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
    MPI_Comm comm, MPI_Request *request, MPIDBG_EXTARG)
00281 {
00282     MPIDBG_Out("MPI_Issend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00283     int ret = MPI_Issend(buf, count, datatype, dest, tag, comm, request);
00284     if ( ret == MPI_SUCCESS ) {
00285         MPIDBG_Out("MPI_Issend: OK");
00286     }
00287     else {
00288         MPIDBG_Out("MPI_Issend: Failed");
00289     }
00290     return ret;
00291 }
00292 #define MPI_Issend(...) MPIDBG_Issend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00293
00294 /*
00295     #] MPI_Issend :
00296     #[ MPI_Irsend :
00297 */
00298
00299 static inline int MPIDBG_Irsend(void* buf, int count, MPI_Datatype datatype, int dest, int tag,
    MPI_Comm comm, MPI_Request *request, MPIDBG_EXTARG)
00300 {
00301     MPIDBG_Out("MPI_Irsend: src=%d dest=%d tag=%d count=%d", MPIDBG_RANK, dest, tag, count);
00302     int ret = MPI_Irsend(buf, count, datatype, dest, tag, comm, request);
00303     if ( ret == MPI_SUCCESS ) {
00304         MPIDBG_Out("MPI_Irsend: OK");
00305     }
00306     else {
00307         MPIDBG_Out("MPI_Irsend: Failed");
00308     }
00309     return ret;
00310 }
00311 #define MPI_Irsend(...) MPIDBG_Irsend(__VA_ARGS__, __FILE__, __LINE__, __func__)
00312
00313 /*
00314     #] MPI_Irsend :
00315     #[ MPI_Irecv :
00316 */
00317
00318 static inline int MPIDBG_Irecv(void* buf, int count, MPI_Datatype datatype, int source, int tag,
    MPI_Comm comm, MPI_Request *request, MPIDBG_EXTARG)
00319 {
00320     MPIDBG_Out("MPI_Irecv: src=%d dest=%d tag=%d", source, MPIDBG_RANK, tag);
00321     int ret = MPI_Irecv(buf, count, datatype, source, tag, comm, request);
00322     if ( ret == MPI_SUCCESS ) {
00323         MPIDBG_Out("MPI_Irecv: OK dest=%d", MPIDBG_RANK);
00324     }
00325     else {
00326         MPIDBG_Out("MPI_Irecv: Failed");
00327     }
00328     return ret;
00329 }
00330 #define MPI_Irecv(...) MPIDBG_Irecv(__VA_ARGS__, __FILE__, __LINE__, __func__)
00331
00332 /*
00333     #] MPI_Irecv :
00334     #[ MPI_Wait :
00335 */
00336

```

```

00337 static inline int MPIDBG_Wait(MPI_Request *request, MPI_Status *status, MPIDBG_EXTARG)
00338 {
00339     char buf[256 * 1]; /* Enough. */
00340     MPI_Request old_request = *request;
00341     MPIDBG_sprint_requests(buf, 1, request);
00342     MPIDBG_Out("MPI_Wait: rank=%d request=%s", MPIDBG_RANK, buf);
00343     int ret = MPI_Wait(request, status);
00344     if ( ret == MPI_SUCCESS ) {
00345         MPIDBG_sprint_statuses(buf, 1, request, &old_request, status);
00346         MPIDBG_Out("MPI_Wait: OK rank=%d result=%s", MPIDBG_RANK, buf);
00347     }
00348     else {
00349         MPIDBG_Out("MPI_Wait: Failed");
00350     }
00351     return ret;
00352 }
00353 #define MPI_Wait(...) MPIDBG_Wait(__VA_ARGS__, __FILE__, __LINE__, __func__)
00354
00355 /*
00356     #] MPI_Wait :
00357     #[ MPI_Test :
00358 */
00359
00360 static inline int MPIDBG_Test(MPI_Request *request, int *flag, MPI_Status *status, MPIDBG_EXTARG)
00361 {
00362     char buf[256 * 1]; /* Enough. */
00363     MPI_Request old_request = *request;
00364     MPIDBG_sprint_requests(buf, 1, request);
00365     MPIDBG_Out("MPI_Test: rank=%d request=%s", MPIDBG_RANK, buf);
00366     int ret = MPI_Test(request, flag, status);
00367     if ( ret == MPI_SUCCESS ) {
00368         if ( *flag ) {
00369             MPIDBG_sprint_statuses(buf, 1, request, &old_request, status);
00370             MPIDBG_Out("MPI_Test: OK rank=%d result=%s", MPIDBG_RANK, buf);
00371         }
00372         else {
00373             MPIDBG_Out("MPI_Test: OK flag=false");
00374         }
00375     }
00376     else {
00377         MPIDBG_Out("MPI_Test: Failed");
00378     }
00379     return ret;
00380 }
00381 #define MPI_Test(...) MPIDBG_Test(__VA_ARGS__, __FILE__, __LINE__, __func__)
00382
00383 /*
00384     #] MPI_Test :
00385     #[ MPI_Waitany :
00386 */
00387
00388 static inline int MPIDBG_Waitany(int count, MPI_Request *array_of_requests, int *index, MPI_Status
*status, MPIDBG_EXTARG)
00389 {
00390     char buf[256]; /* Enough. */
00391     MPI_Request old_requests[count];
00392     memcpy(old_requests, array_of_requests, sizeof(MPI_Request) * count);
00393     MPIDBG_sprint_requests(buf, count, array_of_requests);
00394     MPIDBG_Out("MPI_Waitany: rank=%d request=%s", MPIDBG_RANK, buf);
00395     int ret = MPI_Waitany(count, array_of_requests, index, status);
00396     if ( ret == MPI_SUCCESS ) {
00397         MPI_Status statuses[count];
00398         statuses[*index] = *status;
00399         MPIDBG_sprint_statuses(buf, count, old_requests, array_of_requests, statuses);
00400         MPIDBG_Out("MPI_Waitany: OK rank=%d result=%s", MPIDBG_RANK, buf);
00401     }
00402     else {
00403         MPIDBG_Out("MPI_Waitany: Failed");
00404     }
00405     return ret;
00406 }
00407 #define MPI_Waitany(...) MPIDBG_Waitany(__VA_ARGS__, __FILE__, __LINE__, __func__)
00408
00409 /*
00410     #] MPI_Waitany :
00411     #[ MPI_Testany :
00412 */
00413
00414 static inline int MPIDBG_Testany(int count, MPI_Request *array_of_requests, int *index, int *flag,
MPI_Status *status, MPIDBG_EXTARG)
00415 {
00416     char buf[256]; /* Enough. */
00417     MPI_Request old_requests[count];
00418     memcpy(old_requests, array_of_requests, sizeof(MPI_Request) * count);
00419     MPIDBG_sprint_requests(buf, count, array_of_requests);
00420     MPIDBG_Out("MPI_Testany: rank=%d request=%s", MPIDBG_RANK, buf);
00421     int ret = MPI_Testany(count, array_of_requests, index, flag, status);

```

```

00422     if ( ret == MPI_SUCCESS ) {
00423         if ( *flag ) {
00424             MPI_Status statuses[count];
00425             statuses[*index] = *status;
00426             MPIDBG_sprint_statuses(buf, count, old_requests, array_of_requests, statuses);
00427             MPIDBG_Out("MPI_Testany: OK rank=%d result=%s", MPIDBG_RANK, buf);
00428         }
00429         else {
00430             MPIDBG_Out("MPI_Testany: OK flag=false");
00431         }
00432     }
00433     else {
00434         MPIDBG_Out("MPI_Testany: Failed");
00435     }
00436     return ret;
00437 }
00438 #define MPI_Testany(...) MPIDBG_Testany(__VA_ARGS__, __FILE__, __LINE__, __func__)
00439
00440 /*
00441     #] MPI_Testany :
00442     #[ MPI_Waitall :
00443 */
00444
00445 static inline int MPIDBG_Waitall(int count, MPI_Request *array_of_requests, MPI_Status
*array_of_statuses, MPIDBG_EXTARG)
00446 {
00447     char buf[256 * count]; /* Enough. */
00448     MPI_Request old_requests[count];
00449     memcpy(old_requests, array_of_requests, sizeof(MPI_Request) * count);
00450     MPIDBG_sprint_requests(buf, count, array_of_requests);
00451     MPIDBG_Out("MPI_Waitall: rank=%d request=%s", MPIDBG_RANK, buf);
00452     int ret = MPI_Waitall(count, array_of_requests, array_of_statuses);
00453     if ( ret == MPI_SUCCESS ) {
00454         MPIDBG_sprint_statuses(buf, count, old_requests, array_of_requests, array_of_statuses);
00455         MPIDBG_Out("MPI_Waitall: OK rank=%d result=%s", MPIDBG_RANK, buf);
00456     }
00457     else {
00458         MPIDBG_Out("MPI_Waitall: Failed");
00459     }
00460     return ret;
00461 }
00462 #define MPI_Waitall(...) MPIDBG_Waitall(__VA_ARGS__, __FILE__, __LINE__, __func__)
00463
00464 /*
00465     #] MPI_Waitall :
00466     #[ MPI_Testall :
00467 */
00468
00469 static inline int MPIDBG_Testall(int count, MPI_Request *array_of_requests, int *flag, MPI_Status
*array_of_statuses, MPIDBG_EXTARG)
00470 {
00471     char buf[256 * count]; /* Enough. */
00472     MPI_Request old_requests[count];
00473     memcpy(old_requests, array_of_requests, sizeof(MPI_Request) * count);
00474     MPIDBG_sprint_requests(buf, count, array_of_requests);
00475     MPIDBG_Out("MPI_Testall: rank=%d request=%s", MPIDBG_RANK, buf);
00476     int ret = MPI_Testall(count, array_of_requests, flag, array_of_statuses);
00477     if ( ret == MPI_SUCCESS ) {
00478         if ( *flag ) {
00479             MPIDBG_sprint_statuses(buf, count, old_requests, array_of_requests, array_of_statuses);
00480             MPIDBG_Out("MPI_Testall: OK rank=%d result=%s", MPIDBG_RANK, buf);
00481         }
00482         else {
00483             MPIDBG_Out("MPI_Testall: OK flag=false");
00484         }
00485     }
00486     else {
00487         MPIDBG_Out("MPI_Testall: Failed");
00488     }
00489     return ret;
00490 }
00491 #define MPI_Testall(...) MPIDBG_Testall(__VA_ARGS__, __FILE__, __LINE__, __func__)
00492
00493 /*
00494     #] MPI_Testall :
00495     #[ MPI_Waitsome :
00496 */
00497
00498 static inline int MPIDBG_Waitsome(int incount, MPI_Request *array_of_requests, int *outcount, int
*array_of_indices, MPI_Status *array_of_statuses, MPIDBG_EXTARG)
00499 {
00500     char buf[256 * incount]; /* Enough. */
00501     MPI_Request old_requests[incount];
00502     memcpy(old_requests, array_of_requests, sizeof(MPI_Request) * incount);
00503     MPIDBG_sprint_requests(buf, incount, array_of_requests);
00504     MPIDBG_Out("MPI_Waitsome: rank=%d request=%s", MPIDBG_RANK, buf);
00505     int ret = MPI_Waitsome(incount, array_of_requests, outcount, array_of_indices, array_of_statuses);

```

```

00506     if ( ret == MPI_SUCCESS ) {
00507         MPIDBG_sprint_statuses(buf, incount, old_requests, array_of_requests, array_of_statuses);
00508         MPIDBG_Out("MPI_Waitosome: OK rank=%d result=%s", MPIDBG_RANK, buf);
00509     }
00510     else {
00511         MPIDBG_Out("MPI_Waitosome: Failed");
00512     }
00513     return ret;
00514 }
00515 #define MPI_Waitosome(...) MPIDBG_Waitosome(__VA_ARGS__, __FILE__, __LINE__, __func__)
00516
00517 /*
00518     #] MPI_Waitosome :
00519     #[ MPI_Testosome :
00520 */
00521
00522 static inline int MPIDBG_Testosome(int incount, MPI_Request *array_of_requests, int *outcount, int
    *array_of_indices, MPI_Status *array_of_statuses, MPIDBG_EXTARG)
00523 {
00524     char buf[256 * incount]; /* Enough. */
00525     MPI_Request old_requests[incount];
00526     memcpy(old_requests, array_of_requests, sizeof(MPI_Request) * incount);
00527     MPIDBG_sprint_requests(buf, incount, array_of_requests);
00528     MPIDBG_Out("MPI_Testosome: rank=%d request=%s", MPIDBG_RANK, buf);
00529     int ret = MPI_Testosome(incount, array_of_requests, outcount, array_of_indices, array_of_statuses);
00530     if ( ret == MPI_SUCCESS ) {
00531         MPIDBG_sprint_statuses(buf, incount, old_requests, array_of_requests, array_of_statuses);
00532         MPIDBG_Out("MPI_Testosome: OK rank=%d result=%s", MPIDBG_RANK, buf);
00533     }
00534     else {
00535         MPIDBG_Out("MPI_Testosome: Failed");
00536     }
00537     return ret;
00538 }
00539 #define MPI_Testosome(...) MPIDBG_Testosome(__VA_ARGS__, __FILE__, __LINE__, __func__)
00540
00541 /*
00542     #] MPI_Testosome :
00543     #[ MPI_Iprobe :
00544 */
00545
00546 static inline int MPIDBG_Iprobe(int source, int tag, MPI_Comm comm, int *flag, MPI_Status *status,
    MPIDBG_EXTARG)
00547 {
00548     MPIDBG_Out("MPI_Iprobe: src=%d dest=%d tag=%d", source, MPIDBG_RANK, tag);
00549     int ret = MPI_Iprobe(source, tag, comm, flag, status);
00550     if ( ret == MPI_SUCCESS ) {
00551         if ( *flag ) {
00552             int ret_size = 0;
00553             MPI_Get_count(status, MPI_BYTE, &ret_size);
00554             MPIDBG_Out("MPI_Iprobe: OK src=%d dest=%d tag=%d size=%d", status->MPI_SOURCE,
    MPIDBG_RANK, status->MPI_TAG, ret_size);
00555         }
00556         else {
00557             MPIDBG_Out("MPI_Iprobe: OK flag=false");
00558         }
00559     }
00560     else {
00561         MPIDBG_Out("MPI_Iprobe: Failed");
00562     }
00563     return ret;
00564 }
00565 #define MPI_Iprobe(...) MPIDBG_Iprobe(__VA_ARGS__, __FILE__, __LINE__, __func__)
00566
00567 /*
00568     #] MPI_Iprobe :
00569     #[ MPI_Probe :
00570 */
00571
00572 static inline int MPIDBG_Probe(int source, int tag, MPI_Comm comm, MPI_Status *status, MPIDBG_EXTARG)
00573 {
00574     MPIDBG_Out("MPI_Probe: src=%d dest=%d tag=%d", source, MPIDBG_RANK, tag);
00575     int ret = MPI_Probe(source, tag, comm, status);
00576     if ( ret == MPI_SUCCESS ) {
00577         int ret_size = 0;
00578         MPI_Get_count(status, MPI_BYTE, &ret_size);
00579         MPIDBG_Out("MPI_Probe: OK src=%d dest=%d tag=%d size=%d", status->MPI_SOURCE, MPIDBG_RANK,
    status->MPI_TAG, ret_size);
00580     }
00581     else {
00582         MPIDBG_Out("MPI_Probe: Failed");
00583     }
00584     return ret;
00585 }
00586 #define MPI_Probe(...) MPIDBG_Probe(__VA_ARGS__, __FILE__, __LINE__, __func__)
00587
00588 /*

```



```

00589     #] MPI_Probe :
00590     #[ MPI_Cancel :
00591 */
00592
00593 static inline int MPIDBG_Cancel(MPI_Request *request, MPIDBG_EXTARG)
00594 {
00595     MPIDBG_Out("MPI_Cancel: rank=%d", MPIDBG_RANK);
00596     int ret = MPI_Cancel(request);
00597     if ( ret == MPI_SUCCESS ) {
00598         MPIDBG_Out("MPI_Cancel: OK");
00599     }
00600     else {
00601         MPIDBG_Out("MPI_Cancel: Failed");
00602     }
00603     return ret;
00604 }
00605 #define MPI_Cancel(...) MPIDBG_Cancel(__VA_ARGS__, __FILE__, __LINE__, __func__)
00606
00607 /*
00608     #] MPI_Cancel :
00609     #[ MPI_Test_cancelled :
00610 */
00611
00612 static inline int MPIDBG_Test_cancelled(MPI_Status *status, int *flag, MPIDBG_EXTARG)
00613 {
00614     MPIDBG_Out("MPI_Test_cancelled: rank=%d", MPIDBG_RANK);
00615     int ret = MPI_Test_cancelled(status, flag);
00616     if ( ret == MPI_SUCCESS ) {
00617         if ( *flag ) {
00618             MPIDBG_Out("MPI_Test_cancelled: OK flag=true");
00619         }
00620         else {
00621             MPIDBG_Out("MPI_Test_cancelled: OK flag=false");
00622         }
00623     }
00624     else {
00625         MPIDBG_Out("MPI_Test_cancelled: Failed");
00626     }
00627     return ret;
00628 }
00629 #define MPI_Test_cancelled(...) MPIDBG_Test_cancelled(__VA_ARGS__, __FILE__, __LINE__, __func__)
00630
00631 /*
00632     #] MPI_Test_cancelled :
00633     #[ MPI_Barrier :
00634 */
00635
00636 static inline int MPIDBG_Barrier(MPI_Comm comm, MPIDBG_EXTARG)
00637 {
00638     MPIDBG_Out("MPI_Barrier: rank=%d", MPIDBG_RANK);
00639     int ret = MPI_Barrier(comm);
00640     if ( ret == MPI_SUCCESS ) {
00641         MPIDBG_Out("MPI_Barrier: OK");
00642     }
00643     else {
00644         MPIDBG_Out("MPI_Barrier: Failed");
00645     }
00646     return ret;
00647 }
00648 #define MPI_Barrier(...) MPIDBG_Barrier(__VA_ARGS__, __FILE__, __LINE__, __func__)
00649
00650 /*
00651     #] MPI_Barrier :
00652     #[ MPI_Bcast :
00653 */
00654
00655 static inline int MPIDBG_Bcast(void* buffer, int count, MPI_Datatype datatype, int root, MPI_Comm
comm, MPIDBG_EXTARG)
00656 {
00657     MPIDBG_Out("MPI_Bcast: root=%d count=%d", root, count);
00658     int ret = MPI_Bcast(buffer, count, datatype, root, comm);
00659     if ( ret == MPI_SUCCESS ) {
00660         MPIDBG_Out("MPI_Bcast: OK");
00661     }
00662     else {
00663         MPIDBG_Out("MPI_Bcast: Failed");
00664     }
00665     return ret;
00666 }
00667 #define MPI_Bcast(...) MPIDBG_Bcast(__VA_ARGS__, __FILE__, __LINE__, __func__)
00668
00669 /*
00670     #] MPI_Bcast :
00671     #] MPI APIs :
00672 */
00673
00674 #endif /* MPIDBG_H */

```

4.85 mytime.cc

```

00001 /* #[ License : */
00002 /*
00003  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00004  * When using this file you are requested to refer to the publication
00005  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00006  * This is considered a matter of courtesy as the development was paid
00007  * for by FOM the Dutch physics granting agency and we would like to
00008  * be able to track its scientific use to convince FOM of its value
00009  * for the community.
00010  *
00011  * This file is part of FORM.
00012  *
00013  * FORM is free software: you can redistribute it and/or modify it under the
00014  * terms of the GNU General Public License as published by the Free Software
00015  * Foundation, either version 3 of the License, or (at your option) any later
00016  * version.
00017  *
00018  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00019  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00020  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00021  * details.
00022  *
00023  * You should have received a copy of the GNU General Public License along
00024  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00025  */
00026 /* #[ License : */
00027
00028 #ifdef HAVE_CONFIG_H
00029 #include <config.h>
00030 #endif
00031
00032 // A timing routine for debugging. Only on Unix (where sys/time.h is available).
00033 #ifdef UNIX
00034
00035 #include <sys/time.h>
00036 #include <cstdlib>
00037 #include <stdio>
00038 #include <string>
00039
00040 #ifndef timersub
00041 /* timersub is not in POSIX, but presents on most BSD derivatives.
00042    This implementation is borrowed from glibc. (TU 23 Oct 2011) */
00043 #define timersub(a, b, result) \
00044     do { \
00045         (result)->tv_sec = (a)->tv_sec - (b)->tv_sec; \
00046         (result)->tv_usec = (a)->tv_usec - (b)->tv_usec; \
00047         if ((result)->tv_usec < 0) { \
00048             --(result)->tv_sec; \
00049             (result)->tv_usec += 1000000; \
00050         } \
00051     } while (0)
00052 #endif
00053
00054 bool starttime_set = false;
00055 timeval starttime;
00056
00057 double thetime () {
00058     if (!starttime_set) {
00059         gettimeofday(&starttime, NULL);
00060         starttime_set=true;
00061     }
00062     timeval now,diff;
00063     gettimeofday(&now, NULL);
00064     timersub(&now,&starttime,&diff);
00065     return diff.tv_sec+diff.tv_usec/1000000.0;
00066 }
00067
00068 std::string thetime_str() {
00069     char res[10];
00070     snprintf(res,10,"%4.1f", thetime());
00071     return res;
00072 }
00073
00074 #endif // UNIX

```

4.86 mytime.h

```

00001 #pragma once
00002 /* #[ License : */
00003 /*

```

```


00004 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00005 * When using this file you are requested to refer to the publication
00006 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00007 * This is considered a matter of courtesy as the development was paid
00008 * for by FOM the Dutch physics granting agency and we would like to
00009 * be able to track its scientific use to convince FOM of its value
00010 * for the community.
00011 *
00012 * This file is part of FORM.
00013 *
00014 * FORM is free software: you can redistribute it and/or modify it under the
00015 * terms of the GNU General Public License as published by the Free Software
00016 * Foundation, either version 3 of the License, or (at your option) any later
00017 * version.
00018 *
00019 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00020 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00021 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00022 * details.
00023 *
00024 * You should have received a copy of the GNU General Public License along
00025 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00026 */
00027 /* #] License : */
00028
00029 double thetime();
00030 std::string thetime_str();

```

4.87 names.c File Reference

```
#include "form3.h"
```

Include dependency graph for names.c:

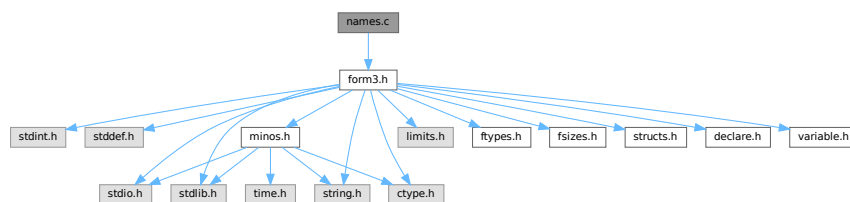

Functions

- [NAMENODE](#) * [GetNode](#) ([NAMETREE](#) *nametree, UBYTE *name)
- int [AddName](#) ([NAMETREE](#) *nametree, UBYTE *name, WORD type, WORD number, int *nodenum)
- int [GetName](#) ([NAMETREE](#) *nametree, UBYTE *namein, WORD *number, int par)
- UBYTE * [GetFunction](#) (UBYTE *s, WORD *funnum)
- UBYTE * [GetNumber](#) (UBYTE *s, WORD *num)
- int [GetLastExprName](#) (UBYTE *name, WORD *number)
- int [GetOName](#) ([NAMETREE](#) *nametree, UBYTE *name, WORD *number, int par)
- int [GetAutoName](#) (UBYTE *name, WORD *number)
- int [GetVar](#) (UBYTE *name, WORD *type, WORD *number, int wantedtype, int par)
- int [EntVar](#) (WORD type, UBYTE *name, WORD x, WORD y, WORD z, WORD d)
- int [GetDollar](#) (UBYTE *name)
- void [DumpTree](#) ([NAMETREE](#) *nametree)
- void [DumpNode](#) ([NAMETREE](#) *nametree, WORD node, WORD depth)
- int [CompactifyTree](#) ([NAMETREE](#) *nametree, WORD par)
- void [CopyTree](#) ([NAMETREE](#) *newtree, [NAMETREE](#) *oldtree, WORD node, WORD par)
- void [LinkTree](#) ([NAMETREE](#) *tree, WORD offset, WORD numnodes)

- [NAMETREE](#) * [MakeNameTree](#) (void)
- void [FreeNameTree](#) ([NAMETREE](#) *n)
- void [ClearWildcardNames](#) (void)
- int [AddWildcardName](#) (UBYTE *name)
- int [GetWildcardName](#) (UBYTE *name)
- int [AddSymbol](#) (UBYTE *name, int minpow, int maxpow, int cplx, int dim)
- int [CoSymbol](#) (UBYTE *s)
- int [AddIndex](#) (UBYTE *name, int dim, int dim4)
- int [CoIndex](#) (UBYTE *s)
- UBYTE * [DoDimension](#) (UBYTE *s, int *dim, int *dim4)
- int [CoDimension](#) (UBYTE *s)
- int [AddVector](#) (UBYTE *name, int cplx, int dim)
- int [CoVector](#) (UBYTE *s)
- int [AddFunction](#) (UBYTE *name, int comm, int istensor, int cplx, int symprop, int dim, int argmax, int argmin)
- int [CoCommutelnSet](#) (UBYTE *s)
- int [CoFunction](#) (UBYTE *s, int comm, int istensor)
- int [CoNFunction](#) (UBYTE *s)
- int [CoCFunction](#) (UBYTE *s)
- int [CoNTensor](#) (UBYTE *s)
- int [CoCTensor](#) (UBYTE *s)
- int [DoTable](#) (UBYTE *s, int par)
- int [CoTable](#) (UBYTE *s)
- int [CoNTable](#) (UBYTE *s)
- int [CoCTable](#) (UBYTE *s)
- void [EmptyTable](#) ([TABLES](#) T)
- int [AddSet](#) (UBYTE *name, WORD dim)
- int [DoElements](#) (UBYTE *s, [SETS](#) set, UBYTE *name)
- int [CoSet](#) (UBYTE *s)
- int [DoTempSet](#) (UBYTE *from, UBYTE *to)
- int [CoAuto](#) (UBYTE *inp)
- int [AddDollar](#) (UBYTE *name, WORD type, WORD *start, LONG size)
- int [ReplaceDollar](#) (WORD number, WORD newtype, WORD *newstart, LONG newsize)
- int [AddDubious](#) (UBYTE *name)
- int [MakeDubious](#) ([NAMETREE](#) *nametree, UBYTE *name, WORD *number)
- int [NameConflict](#) (int type, UBYTE *name)
- int [AddExpression](#) (UBYTE *name, int x, int y)
- int [GetLabel](#) (UBYTE *name)
- void [ResetVariables](#) (int par)
- void [RemoveDollars](#) (void)
- void [Globalize](#) (int par)
- int [TestName](#) (UBYTE *name)

4.87.1 Detailed Description

The complete names administration. All variables with a name have to pass here to be properly registered, have structs of the proper type assigned to them etc. The file also contains the utility routines for maintaining the balanced trees that make searching for names rather fast.

Definition in file [names.c](#).

4.87.2 Function Documentation

4.87.2.1 GetNode()

```
NAMENODE * GetNode (
    NAMETREE * nametree,
    UBYTE * name )
```

Definition at line 49 of file [names.c](#).

4.87.2.2 AddName()

```
int AddName (
    NAMETREE * nametree,
    UBYTE * name,
    WORD type,
    WORD number,
    int * nodenum )
```

Definition at line 71 of file [names.c](#).

4.87.2.3 GetName()

```
int GetName (
    NAMETREE * nametree,
    UBYTE * namein,
    WORD * number,
    int par )
```

Definition at line 252 of file [names.c](#).

4.87.2.4 GetFunction()

```
UBYTE * GetFunction (
    UBYTE * s,
    WORD * funnum )
```

Definition at line 342 of file [names.c](#).

4.87.2.5 GetNumber()

```
UBYTE * GetNumber (
    UBYTE * s,
    WORD * num )
```

Definition at line 388 of file [names.c](#).

4.87.2.6 GetLastExprName()

```
int GetLastExprName (
    UBYTE * name,
    WORD * number )
```

Definition at line [438](#) of file [names.c](#).

4.87.2.7 GetOName()

```
int GetOName (
    NAMETREE * nametree,
    UBYTE * name,
    WORD * number,
    int par )
```

Definition at line [460](#) of file [names.c](#).

4.87.2.8 GetAutoName()

```
int GetAutoName (
    UBYTE * name,
    WORD * number )
```

Definition at line [479](#) of file [names.c](#).

4.87.2.9 GetVar()

```
int GetVar (
    UBYTE * name,
    WORD * type,
    WORD * number,
    int wantedtype,
    int par )
```

Definition at line [524](#) of file [names.c](#).

4.87.2.10 EntVar()

```
int EntVar (
    WORD type,
    UBYTE * name,
    WORD x,
    WORD y,
    WORD z,
    WORD d )
```

Definition at line [557](#) of file [names.c](#).

4.87.2.11 GetDollar()

```
int GetDollar (
    UBYTE * name )
```

Definition at line 590 of file [names.c](#).

4.87.2.12 DumpTree()

```
void DumpTree (
    NAMETREE * nametree )
```

Definition at line 602 of file [names.c](#).

4.87.2.13 DumpNode()

```
void DumpNode (
    NAMETREE * nametree,
    WORD node,
    WORD depth )
```

Definition at line 615 of file [names.c](#).

4.87.2.14 CompactifyTree()

```
int CompactifyTree (
    NAMETREE * nametree,
    WORD par )
```

Definition at line 634 of file [names.c](#).

4.87.2.15 CopyTree()

```
void CopyTree (
    NAMETREE * newtree,
    NAMETREE * oldtree,
    WORD node,
    WORD par )
```

Definition at line 696 of file [names.c](#).

4.87.2.16 LinkTree()

```
void LinkTree (
    NAMETREE * tree,
    WORD offset,
    WORD numnodes )
```

Definition at line 784 of file [names.c](#).

4.87.2.17 MakeNameTree()

```
NAMETREE * MakeNameTree (
    void )
```

Definition at line 815 of file [names.c](#).

4.87.2.18 FreeNameTree()

```
void FreeNameTree (
    NAMETREE * n )
```

Definition at line 834 of file [names.c](#).

4.87.2.19 ClearWildcardNames()

```
void ClearWildcardNames (
    void )
```

Definition at line 849 of file [names.c](#).

4.87.2.20 AddWildcardName()

```
int AddWildcardName (
    UBYTE * name )
```

Definition at line 854 of file [names.c](#).

4.87.2.21 GetWildcardName()

```
int GetWildcardName (
    UBYTE * name )
```

Definition at line 898 of file [names.c](#).

4.87.2.22 AddSymbol()

```
int AddSymbol (
    UBYTE * name,
    int minpow,
    int maxpow,
    int cplx,
    int dim )
```

Definition at line 920 of file [names.c](#).

4.87.2.23 CoSymbol()

```
int CoSymbol (
    UBYTE * s )
```

Definition at line 946 of file [names.c](#).

4.87.2.24 AddIndex()

```
int AddIndex (
    UBYTE * name,
    int dim,
    int dim4 )
```

Definition at line 1088 of file [names.c](#).

4.87.2.25 CoIndex()

```
int CoIndex (
    UBYTE * s )
```

Definition at line 1112 of file [names.c](#).

4.87.2.26 DoDimension()

```
UBYTE * DoDimension (
    UBYTE * s,
    int * dim,
    int * dim4 )
```

Definition at line 1160 of file [names.c](#).

4.87.2.27 CoDimension()

```
int CoDimension (
    UBYTE * s )
```

Definition at line 1226 of file [names.c](#).

4.87.2.28 AddVector()

```
int AddVector (
    UBYTE * name,
    int cplx,
    int dim )
```

Definition at line 1244 of file [names.c](#).

4.87.2.29 CoVector()

```
int CoVector (
    UBYTE * s )
```

Definition at line 1267 of file [names.c](#).

4.87.2.30 AddFunction()

```
int AddFunction (
    UBYTE * name,
    int comm,
    int istensor,
    int cplx,
    int symprop,
    int dim,
    int argmax,
    int argmin )
```

Definition at line 1326 of file [names.c](#).

4.87.2.31 CoCommuteInSet()

```
int CoCommuteInSet (
    UBYTE * s )
```

Definition at line 1356 of file [names.c](#).

4.87.2.32 CoFunction()

```
int CoFunction (
    UBYTE * s,
    int comm,
    int istensor )
```

Definition at line 1446 of file [names.c](#).

4.87.2.33 CoNFunction()

```
int CoNFunction (
    UBYTE * s )
```

Definition at line 1628 of file [names.c](#).

4.87.2.34 CoCFunction()

```
int CoCFunction (
    UBYTE * s )
```

Definition at line 1629 of file [names.c](#).

4.87.2.35 CoNTensor()

```
int CoNTensor (
    UBYTE * s )
```

Definition at line 1630 of file [names.c](#).

4.87.2.36 CoCTensor()

```
int CoCTensor (
    UBYTE * s )
```

Definition at line 1631 of file [names.c](#).

4.87.2.37 DoTable()

```
int DoTable (
    UBYTE * s,
    int par )
```

Definition at line 1670 of file [names.c](#).

4.87.2.38 CoTable()

```
int CoTable (
    UBYTE * s )
```

Definition at line 2052 of file [names.c](#).

4.87.2.39 CoNTable()

```
int CoNTable (
    UBYTE * s )
```

Definition at line 2062 of file [names.c](#).

4.87.2.40 CoCTable()

```
int CoCTable (
    UBYTE * s )
```

Definition at line 2072 of file [names.c](#).

4.87.2.41 EmptyTable()

```
void EmptyTable (
    TABLES T )
```

Definition at line 2082 of file [names.c](#).

4.87.2.42 AddSet()

```
int AddSet (
    UBYTE * name,
    WORD dim )
```

Definition at line 2126 of file [names.c](#).

4.87.2.43 DoElements()

```
int DoElements (
    UBYTE * s,
    SETS set,
    UBYTE * name )
```

Definition at line 2159 of file [names.c](#).

4.87.2.44 CoSet()

```
int CoSet (
    UBYTE * s )
```

Definition at line 2359 of file [names.c](#).

4.87.2.45 DoTempSet()

```
int DoTempSet (
    UBYTE * from,
    UBYTE * to )
```

Definition at line 2484 of file [names.c](#).

4.87.2.46 CoAuto()

```
int CoAuto (
    UBYTE * inp )
```

Definition at line 2576 of file [names.c](#).

4.87.2.47 AddDollar()

```
int AddDollar (
    UBYTE * name,
    WORD type,
    WORD * start,
    LONG size )
```

Definition at line 2606 of file [names.c](#).

4.87.2.48 ReplaceDollar()

```
int ReplaceDollar (
    WORD number,
    WORD newtype,
    WORD * newstart,
    LONG newsize )
```

Definition at line 2650 of file [names.c](#).

4.87.2.49 AddDubious()

```
int AddDubious (
    UBYTE * name )
```

Definition at line 2683 of file [names.c](#).

4.87.2.50 MakeDubious()

```
int MakeDubious (
    NAMETREE * nametree,
    UBYTE * name,
    WORD * number )
```

Definition at line 2697 of file [names.c](#).

4.87.2.51 NameConflict()

```
int NameConflict (
    int type,
    UBYTE * name )
```

Definition at line 2732 of file [names.c](#).

4.87.2.52 AddExpression()

```
int AddExpression (
    UBYTE * name,
    int x,
    int y )
```

Definition at line 2748 of file [names.c](#).

4.87.2.53 GetLabel()

```
int GetLabel (
    UBYTE * name )
```

Definition at line 2791 of file [names.c](#).

4.87.2.54 ResetVariables()

```
void ResetVariables (
    int par )
```

Definition at line 2836 of file [names.c](#).

4.87.2.55 RemoveDollars()

```
void RemoveDollars (
    void )
```

Definition at line 3132 of file [names.c](#).

4.87.2.56 Globalize()

```
void Globalize (
    int par )
```

Definition at line 3159 of file [names.c](#).

4.87.2.57 TestName()

```
int TestName (
    UBYTE * name )
```

Definition at line 3258 of file [names.c](#).

4.88 names.c

[Go to the documentation of this file.](#)

```
00001
00009 /* # [ License : */
00010 /*
00011 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 * When using this file you are requested to refer to the publication
00013 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 * This is considered a matter of courtesy as the development was paid
00015 * for by FOM the Dutch physics granting agency and we would like to
00016 * be able to track its scientific use to convince FOM of its value
00017 * for the community.
00018 *
00019 * This file is part of FORM.
00020 *
00021 * FORM is free software: you can redistribute it and/or modify it under the
00022 * terms of the GNU General Public License as published by the Free Software
00023 * Foundation, either version 3 of the License, or (at your option) any later
00024 * version.
00025 *
00026 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 * details.
00030 *
00031 * You should have received a copy of the GNU General Public License along
00032 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* # ] License : */
00035 /*
00036 # [ Includes :
```

```

00037 */
00038
00039 #include "form3.h"
00040
00041 /* EXTERNLOCK(dummylock) */
00042
00043 /*
00044     #] Includes :
00045     #[ GetNode :
00046 */
00047
00048
00049 NAMENODE *GetNode(NAMETREE *nametree, UBYTE *name)
00050 {
00051     NAMENODE *n;
00052     int node, newnode, i;
00053     if ( nametree->namenode == 0 ) return(0);
00054     newnode = nametree->headnode;
00055     do {
00056         node = newnode;
00057         n = nametree->namenode+node;
00058         if ( ( i = StrCmp(name,nametree->namebuffer+n->name) ) < 0 )
00059             newnode = n->left;
00060         else if ( i > 0 ) newnode = n->right;
00061         else { return(n); }
00062     } while ( newnode >= 0 );
00063     return(0);
00064 }
00065
00066 /*
00067     #] GetNode :
00068     #[ AddName :
00069 */
00070
00071 int AddName(NAMETREE *nametree, UBYTE *name, WORD type, WORD number, int *nodenum)
00072 {
00073     NAMENODE *n, *nn, *nnn;
00074     UBYTE *s, *ss, *sss;
00075     LONG *cl,*c2, j, newsize;
00076     int node, newnode, node3, r, rr = 0, i, retval = 0;
00077     if ( nametree->namenode == 0 ) {
00078         s = name; i = 1; while ( *s ) { i++; s++; }
00079         j = INITNAMESIZE;
00080         if ( i > j ) j = i;
00081         nametree->namenode = (NAMENODE *)Malloc1(INITNODESIZE*sizeof(NAMENODE),
00082             "new nametree in AddName");
00083         nametree->namebuffer = (UBYTE *)Malloc1(j,
00084             "new namebuffer in AddName");
00085         nametree->nodesize = INITNODESIZE;
00086         nametree->namesize = j;
00087         nametree->namefill = i;
00088         nametree->nodefill = 1;
00089         nametree->headnode = 0;
00090         n = nametree->namenode;
00091         n->parent = n->left = n->right = -1;
00092         n->balance = 0;
00093         n->type = type;
00094         n->number = number;
00095         n->name = 0;
00096         s = name;
00097         ss = nametree->namebuffer;
00098         while ( *s ) *ss++ = *s++;
00099         *ss = 0;
00100         *nodenum = 0;
00101         return(retval);
00102     }
00103     newnode = nametree->headnode;
00104     do {
00105         node = newnode;
00106         n = nametree->namenode+node;
00107         if ( StrCmp(name,nametree->namebuffer+n->name) < 0 ) {
00108             newnode = n->left; r = -1;
00109         }
00110         else {
00111             newnode = n->right; r = 1;
00112         }
00113     } while ( newnode >= 0 );
00114     /*
00115     We are at the insertion point. Add the node.
00116     */
00117     if ( nametree->nodefill >= nametree->nodesize ) { /* Double allocation */
00118         newsize = nametree->nodesize * 2;
00119         if ( newsize > MAXINNAMETREE ) newsize = MAXINNAMETREE;
00120         if ( nametree->nodefill >= MAXINNAMETREE ) {
00121             MesPrint("!!!More than %l names in one object", (LONG)MAXINNAMETREE);
00122             Terminate(-1);
00123         }
00124     }

```

```

00124     nnn = (NAMENODE *)Malloc1(2*((LONG)newsiz* sizeof(NAMENODE)),
00125     "extra names in AddName");
00126     c1 = (LONG *)nnn; c2 = (LONG *)nametree->namenode;
00127     i = (nametree->nodefill * sizeof(NAMENODE))/sizeof(LONG);
00128     while ( --i >= 0 ) *c1++ = *c2++;
00129     M_free(nametree->namenode, "nametree->namenode");
00130     nametree->namenode = nnn;
00131     nametree->nodesize = newsiz;
00132     n = nametree->namenode+node;
00133 }
00134 *nodenum = newnode = nametree->nodefill++;
00135 nn = nametree->namenode+newnode;
00136 nn->parent = node;
00137 if ( r < 0 ) n->left = newnode; else n->right = newnode;
00138 nn->left = nn->right = -1;
00139 nn->type = type;
00140 nn->number = number;
00141 nn->balance = 0;
00142 i = 1; s = name; while ( *s ) { i++; s++; }
00143 while ( nametree->namefill + i >= nametree->namesize ) { /* Double alloc */
00144     sss = (UBYTE *)Malloc1(2*nametree->namesize,
00145     "extra names in AddName");
00146     s = sss; ss = nametree->namebuffer; j = nametree->namefill;
00147     while ( --j >= 0 ) *s++ = *ss++;
00148     M_free(nametree->namebuffer, "nametree->namebuffer");
00149     nametree->namebuffer = sss;
00150     nametree->namesize *= 2;
00151 }
00152 s = nametree->namebuffer+nametree->namefill;
00153 nn->name = nametree->namefill;
00154 retval = nametree->namefill;
00155 nametree->namefill += i;
00156 while ( *name ) *s++ = *name++;
00157 *s = 0;
00158 /*
00159 Adjust the balance factors
00160 */
00161 while ( node >= 0 ) {
00162     n = nametree->namenode + node;
00163     if ( newnode == n->left ) rr = -1;
00164     else rr = 1;
00165     if ( n->balance == -rr ) { n->balance = 0; return(retval); }
00166     else if ( n->balance == rr ) break;
00167     n->balance = rr;
00168     newnode = node;
00169     node = n->parent;
00170 }
00171 if ( node < 0 ) return(retval);
00172 /*
00173 We have to rebalance the tree. There are two basic operations.
00174 n/node is the unbalanced node. newnode is its child.
00175 rr is the old balance of n/node.
00176 */
00177 nn = nametree->namenode + newnode;
00178 if ( nn->balance == -rr ) { /* The difficult case */
00179     if ( rr > 0 ) {
00180         node3 = nn->left;
00181         nnn = nametree->namenode + node3;
00182         nnn->parent = n->parent;
00183         n->parent = nn->parent = node3;
00184         if ( nnn->right >= 0 ) nametree->namenode[nnn->right].parent = newnode;
00185         if ( nnn->left >= 0 ) nametree->namenode[nnn->left].parent = node;
00186         n->right = nnn->left; nnn->left = node;
00187         nn->left = nnn->right; nnn->right = newnode;
00188         if ( nnn->balance > 0 ) { n->balance = -1; nn->balance = 0; }
00189         else if ( nnn->balance == 0 ) { n->balance = nn->balance = 0; }
00190         else { nn->balance = 1; n->balance = 0; }
00191     }
00192     else {
00193         node3 = nn->right;
00194         nnn = nametree->namenode + node3;
00195         nnn->parent = n->parent;
00196         n->parent = nn->parent = node3;
00197         if ( nnn->right >= 0 ) nametree->namenode[nnn->right].parent = node;
00198         if ( nnn->left >= 0 ) nametree->namenode[nnn->left].parent = newnode;
00199         n->left = nnn->right; nnn->right = node;
00200         nn->right = nnn->left; nnn->left = newnode;
00201         if ( nnn->balance < 0 ) { n->balance = 1; nn->balance = 0; }
00202         else if ( nnn->balance == 0 ) { n->balance = nn->balance = 0; }
00203         else { nn->balance = -1; n->balance = 0; }
00204     }
00205     nnn->balance = 0;
00206     if ( nnn->parent >= 0 ) {
00207         nn = nametree->namenode + nnn->parent;
00208         if ( node == nn->left ) nn->left = node3;
00209         else nn->right = node3;
00210     }

```



```

00211     if ( node == nametree->headnode ) nametree->headnode = node3;
00212 }
00213 else if ( nn->balance == rr ) { /* The easy case */
00214     nn->parent = n->parent; n->parent = newnode;
00215     if ( rr > 0 ) {
00216         if ( nn->left >= 0 ) nametree->namenode[nn->left].parent = node;
00217         n->right = nn->left; nn->left = node;
00218     }
00219     else {
00220         if ( nn->right >= 0 ) nametree->namenode[nn->right].parent = node;
00221         n->left = nn->right; nn->right = node;
00222     }
00223     if ( nn->parent >= 0 ) {
00224         nnn = nametree->namenode + nn->parent;
00225         if ( node == nnn->left ) nnn->left = newnode;
00226         else nnn->right = newnode;
00227     }
00228     nn->balance = n->balance = 0;
00229     if ( node == nametree->headnode ) nametree->headnode = newnode;
00230 }
00231 #ifdef DEBUGON
00232 else { /* Cannot be. Code here for debugging only */
00233     MesPrint("We ran into an impossible case in AddName\n");
00234     DumpTree(nametree);
00235     Terminate(-1);
00236 }
00237 #endif
00238 return(retval);
00239 }
00240
00241 /*
00242 #] AddName :
00243 #[ GetName :
00244
00245 When AutoDeclare is an active statement.
00246 If par == WITHAUTO and the variable is not found we have to check:
00247 1: that nametree != AC.exprnames && nametree != AC.dollarnames
00248 2: check that the variable is not in AC.exprnames after all.
00249 3: call GetAutoName and return its values.
00250 */
00251
00252 int GetName(NAMETREE *nametree, UBYTE *namein, WORD *number, int par)
00253 {
00254     NAMENODE *n;
00255     int node, newnode, i;
00256     UBYTE *s, *t, *u, *name;
00257     /* name = ConstructName(namein,0); */
00258     name = namein;
00259     if ( nametree->namenode == 0 || nametree->namefill == 0 ) goto NotFound;
00260     newnode = nametree->headnode;
00261     do {
00262         node = newnode;
00263         n = nametree->namenode+node;
00264         if ( ( i = StrCmp(name,nametree->namebuffer+n->name) ) < 0 )
00265             newnode = n->left;
00266         else if ( i > 0 ) newnode = n->right;
00267         else {
00268             *number = n->number;
00269             return(n->type);
00270         }
00271     } while ( newnode >= 0 );
00272     s = name;
00273     while ( *s ) s++;
00274     if ( s > name && s[-1] == '_' && nametree == AC.varnames ) {
00275     /*
00276         The Kronecker delta d_ is very special. It is not really a function.
00277     */
00278     if ( s == name+2 && ( *name == 'd' || *name == 'D' ) ) {
00279         *number = DELTA-FUNCTION;
00280         return(CDELTA);
00281     }
00282     /*
00283         Test for N#_? type variables (summed indices)
00284     */
00285     if ( s > name+2 && *name == 'N' ) {
00286         t = name+1; i = 0;
00287         while ( FG.cTable[*t] == 1 ) i = 10*i + *t++ - '0';
00288         if ( s == t+1 ) {
00289             *number = i + AM.IndDum - AM.OffsetIndex;
00290             return(CINDEX);
00291         }
00292     }
00293     /*
00294         Now test for any built in object
00295     */
00296     newnode = nametree->headnode;
00297     do {

```

```

00298         node = newnode;
00299         n = nametree->namenode+node;
00300         if ( ( i = StrHICmp(name,nametree->namebuffer+n->name) ) < 0 )
00301             newnode = n->left;
00302         else if ( i > 0 ) newnode = n->right;
00303         else {
00304             *number = n->number; return(n->type);
00305         }
00306     } while ( newnode >= 0 );
00307 /*
00308     Now we test for the extra symbols of the type STR###_
00309     The string sits in AC.extrasym and is followed by digits.
00310     The name is only legal if the number is in the
00311     range 1,...,cbuf[AM.sbufnum].numrhs
00312 */
00313     t = name; u = AC.extrasym;
00314     while ( *t == *u ) { t++; u++; }
00315     if ( *u == 0 && *t != 0 ) { /* potential hit */
00316         WORD x = 0;
00317         while ( FG.cTable[*t] == 1 ) {
00318             x = 10*x + (*t++ - '0');
00319         }
00320         if ( *t == '_' && x > 0 && x <= cbuf[AM.sbufnum].numrhs ) { /* Hit */
00321             *number = MAXVARIABLES-x;
00322             return(CSYMBOL);
00323         }
00324     }
00325 }
00326 NotFound:;
00327 if ( par != WITHAUTO || nametree == AC.autonames ) return(NAMENOTFOUND);
00328 return(GetAutoName(name,number));
00329 }
00330
00331 /*
00332 #] GetName :
00333 #[ GetFunction :
00334
00335 Gets either a function or a $ that should expand into a function
00336 during runtime. In the case of the $ the value in funnum is -dolnum-1.
00337 The return value is the position after the name of the function or the $.
00338 */
00339
00340 static WORD one = 1;
00341
00342 UBYTE *GetFunction(UBYTE *s,WORD *funnum)
00343 {
00344     int type;
00345     WORD numfun;
00346     UBYTE *t1, c;
00347     if ( *s == '$' ) {
00348         t1 = s+1; while ( FG.cTable[*t1] < 2 ) t1++;
00349         c = *t1; *t1 = 0;
00350         if ( ( type = GetName(AC.dollarnames,s+1,&numfun,NOAUTO) ) == CDOLLAR ) {
00351             *funnum = -numfun-2;
00352         }
00353         else {
00354             MesPrint("%s is undefined",s);
00355             numfun = AddDollar(s+1,DOLINDEX,&one,1);
00356             *funnum = 0;
00357         }
00358     }
00359     else {
00360         t1 = SkipAName(s);
00361         c = *t1; *t1 = 0;
00362         if ( ( ( type = GetName(AC.varnames,s,&numfun,WITHAUTO) ) != CFUNCTION )
00363             || ( functions[numfun].spec > 0 ) ) {
00364             MesPrint("%s should be a regular function",s);
00365             *funnum = 0;
00366             if ( type < 0 ) {
00367                 if ( GetName(AC.exprnames,s,&numfun,NOAUTO) == NAMENOTFOUND )
00368                     AddFunction(s,0,0,0,0,0,-1,-1);
00369             }
00370             *t1 = c;
00371             return(t1);
00372         }
00373         *funnum = numfun+FUNCTION;
00374     }
00375     *t1 = c;
00376     return(t1);
00377 }
00378
00379 /*
00380 #] GetFunction :
00381 #[ GetNumber :
00382
00383 Gets either a number or a $ that should expand into a number
00384 during runtime. In the case of the $ the value in num is -dolnum-2.

```

```

00385     The return value is the position after the number or the $.
00386  */
00387
00388 UBYTE *GetNumber(UBYTE *s,WORD *num)
00389 {
00390     int type;
00391     WORD numfun;
00392     UBYTE *t1, c;
00393     while ( *s == '+' ) s++;
00394     if ( *s == '$' ) {
00395         t1 = s+1; while ( FG.cTable[*t1] < 2 ) t1++;
00396         c = *t1; *t1 = 0;
00397         if ( ( type = GetName(AC.dollarnames,s+1,&numfun,NOAUTO) ) == CDOLLAR ) {
00398             *num = -numfun-2;
00399         }
00400         else {
00401             MesPrint("%s is undefined",s);
00402             numfun = AddDollar(s+1,DOLINDEX,&one,1);
00403             *num = -1;
00404         }
00405     }
00406     else if ( *s >= '0' && *s <= '9' ) {
00407         ULONG x = *s++ - '0';
00408         while ( *s >= '0' && *s <= '9' ) { x = 10*x + (*s++-'0'); }
00409         t1 = s;
00410         if ( x >= MAXPOSITIVE ) goto illegal;
00411         *num = (WORD)x;
00412         return(t1);
00413     }
00414     else {
00415         if ( *s == '-' ) { s++; }
00416         if ( *s >= '0' && *s <= '9' ) { while ( *s >= '0' && *s <= '9' ) s++; t1 = s; }
00417         else { t1 = SkipAName(s); }
00418     illegal:
00419         *num = -1;
00420         MesPrint("&Illegal option in Canonicalize statement. Should be a nonnegative number or $
variable.");
00421         return(t1);
00422     }
00423     *t1 = c;
00424     return(t1);
00425 }
00426
00427 /*
00428 #] GetNumber :
00429 #[ GetLastExprName :
00430
00431 When AutoDeclare is an active statement.
00432 If par == WITHAUTO and the variable is not found we have to check:
00433 1: that nametree != AC.exprnames && nametree != AC.dollarnames
00434 2: check that the variable is not in AC.exprnames after all.
00435 3: call GetAutoName and return its values.
00436 */
00437
00438 int GetLastExprName(UBYTE *name, WORD *number)
00439 {
00440     int i;
00441     EXPRESSIONS e;
00442     for ( i = NumExpressions; i > 0; i-- ) {
00443         e = Expressions+i-1;
00444         if ( StrCmp(AC.exprnames->namebuffer+e->name,name) == 0 ) {
00445             *number = i-1;
00446             return(1);
00447         }
00448     }
00449     return(0);
00450 }
00451
00452 /*
00453 #] GetLastExprName :
00454 #[ GetOName :
00455
00456 Adds the proper offsets, so we do not have to do that in the calling
00457 routine.
00458 */
00459
00460 int GetOName(NAMETREE *nametree, UBYTE *name, WORD *number, int par)
00461 {
00462     int retval = GetName(nametree,name,number,par);
00463     switch ( retval ) {
00464         case CVECTOR: *number += AM.OffsetVector; break;
00465         case CINDEX: *number += AM.OffsetIndex; break;
00466         case CFUNCTION: *number += FUNCTION; break;
00467         default: break;
00468     }
00469     return(retval);
00470 }

```

```

00471
00472 /*
00473 #] GetOName :
00474 #[ GetAutoName :
00475
00476 This routine gets the automatic declarations
00477 */
00478
00479 int GetAutoName(UBYTE *name, WORD *number)
00480 {
00481     UBYTE *s, c;
00482     int type;
00483     if ( GetName(AC.exprnames,name,number,NOAUTO) != NAMENOTFOUND )
00484         return(NAMENOTFOUND);
00485     s = name;
00486     while ( *s ) { s++; }
00487     if ( s[-1] == '_' ) {
00488         return(NAMENOTFOUND);
00489     }
00490     while ( s > name ) {
00491         c = *s; *s = 0;
00492         type = GetName(AC.autonames,name,number,NOAUTO);
00493         *s = c;
00494         switch(type) {
00495             case CSYMBOL: {
00496                 SYMBOLS sym = ((SYMBOLS) (AC.AutoSymbolList.lijst)) + *number;
00497                 *number = AddSymbol(name,sym->minpower,sym->maxpower,sym->complex,sym->dimension);
00498                 return(type); }
00499             case CVECTOR: {
00500                 VECTORS vec = ((VECTORS) (AC.AutoVectorList.lijst)) + *number;
00501                 *number = AddVector(name,vec->complex,vec->dimension);
00502                 return(type); }
00503             case CINDEX: {
00504                 INDICES ind = ((INDICES) (AC.AutoIndexList.lijst)) + *number;
00505                 *number = AddIndex(name,ind->dimension,ind->nmin4);
00506                 return(type); }
00507             case CFUNCTION: {
00508                 FUNCTIONS fun = ((FUNCTIONS) (AC.AutoFunctionList.lijst)) + *number;
00509                 *number =
AddFunction(name,fun->commute,fun->spec,fun->complex,fun->symmetric,fun->dimension,fun->maxnumargs,fun->minnumargs);
00510                 return(type); }
00511             default:
00512                 break;
00513         }
00514         s--;
00515     }
00516     return(NAMENOTFOUND);
00517 }
00518
00519 /*
00520 #] GetAutoName :
00521 #[ GetVar :
00522 */
00523
00524 int GetVar(UBYTE *name, WORD *type, WORD *number, int wantedtype, int par)
00525 {
00526     WORD funnum;
00527     int typ;
00528     if ( ( typ = GetName(AC.varnames,name,number,par) ) != wantedtype ) {
00529         if ( typ != NAMENOTFOUND ) {
00530             if ( wantedtype == -1 ) {
00531                 *type = typ;
00532                 return(1);
00533             }
00534             NameConflict(typ,name);
00535             MakeDubious(AC.varnames,name,&funnum);
00536             return(-1);
00537         }
00538         if ( ( typ = GetName(AC.exprnames,name,&funnum,par) ) != NAMENOTFOUND ) {
00539             if ( typ == wantedtype || wantedtype == -1 ) {
00540                 *number = funnum; *type = typ; return(1);
00541             }
00542             NameConflict(typ,name);
00543             return(-1);
00544         }
00545         return(NAMENOTFOUND);
00546     }
00547     if ( typ == -1 ) { return(0); }
00548     *type = typ;
00549     return(1);
00550 }
00551
00552 /*
00553 #] GetVar :
00554 #[ EntVar :
00555 */
00556

```

```

00557 int EntVar(WORD type, UBYTE *name, WORD x, WORD y, WORD z, WORD d)
00558 {
00559     switch ( type ) {
00560         case CSYMBOL:
00561             return(AddSymbol(name,y,z,x,d));
00562             break;
00563         case CINDEK:
00564             return(AddIndex(name,x,z));
00565             break;
00566         case CVECTOR:
00567             return(AddVector(name,x,d));
00568             break;
00569         case CFUNCTION:
00570             return(AddFunction(name,y,z,x,0,d,-1,-1));
00571             break;
00572         case CSET:
00573             AC.SetList.numtemp++;
00574             return(AddSet(name,d));
00575             break;
00576         case CEXPRESSION:
00577             return(AddExpression(name,x,y));
00578             break;
00579         default:
00580             break;
00581     }
00582     return(-1);
00583 }
00584
00585 /*
00586 #] EntVar :
00587 #[ GetDollar :
00588 */
00589
00590 int GetDollar(UBYTE *name)
00591 {
00592     WORD number;
00593     if ( GetName(AC.dollarnames,name,&number,NOAUTO) == NAMENOTFOUND ) return(-1);
00594     return((int)number);
00595 }
00596
00597 /*
00598 #] GetDollar :
00599 #[ DumpTree :
00600 */
00601
00602 void DumpTree(NAMETREE *nametree)
00603 {
00604     if ( nametree->headnode >= 0
00605         && nametree->namebuffer && nametree->namenode ) {
00606         DumpNode(nametree,nametree->headnode,0);
00607     }
00608 }
00609
00610 /*
00611 #] DumpTree :
00612 #[ DumpNode :
00613 */
00614
00615 void DumpNode(NAMETREE *nametree, WORD node, WORD depth)
00616 {
00617     NAMENODE *n;
00618     int i;
00619     char *name;
00620     n = nametree->namenode + node;
00621     if ( n->left >= 0 ) DumpNode(nametree,n->left,depth+1);
00622     for ( i = 0; i < depth; i++ ) printf(" ");
00623     name = (char *) (nametree->namebuffer+n->name);
00624     printf("%s(%d): (%d) (%d) [%d]\n",
00625         name,node,n->parent,n->left,n->right,n->balance);
00626     if ( n->right >= 0 ) DumpNode(nametree,n->right,depth+1);
00627 }
00628
00629 /*
00630 #] DumpNode :
00631 #[ CompactifyTree :
00632 */
00633
00634 int CompactifyTree(NAMETREE *nametree,WORD par)
00635 {
00636     NAMETREE newtree;
00637     NAMENODE *n;
00638     LONG i, j, ns, k;
00639     UBYTE *s;
00640
00641     for ( i = 0, j = 0, k = 0, n = nametree->namenode, ns = 0;
00642         i < nametree->nodedefill; i++, n++ ) {
00643         if ( n->type != CDELETE ) {

```

```

00644         s = nametree->namebuffer+n->name;
00645         while ( *s ) { s++; ns++; }
00646         j++;
00647     }
00648     else k++;
00649 }
00650 if ( k == 0 ) return(0);
00651 if ( j == 0 ) {
00652     if ( nametree->namebuffer ) M_free(nametree->namebuffer,"nametree->namebuffer");
00653     if ( nametree->namenode ) M_free(nametree->namenode,"nametree->namenode");
00654     nametree->namebuffer = 0;
00655     nametree->namenode = 0;
00656     nametree->namesize = nametree->namefill =
00657     nametree->nodesize = nametree->nodefill =
00658     nametree->oldnamefill = nametree->oldnodefill = 0;
00659     nametree->globalnamefill = nametree->globalnodefill =
00660     nametree->clearnamefill = nametree->clearnodefill = 0;
00661     nametree->headnode = -1;
00662     return(0);
00663 }
00664 ns += j;
00665 if ( j < 10 ) j = 10;
00666 if ( ns < 100 ) ns = 100;
00667 newtree->namenode = (NAMENODE *)Malloc1(2*j*sizeof(NAMENODE),"compactify nametree");
00668 newtree->nodefill = 0; newtree->nodesize = 2*j;
00669 newtree->namebuffer = (UBYTE *)Malloc1(2*ns,"compactify nametree");
00670 newtree->namefill = 0; newtree->namesize = 2*ns;
00671 CopyTree(&newtree,nametree,nametree->headnode,par);
00672 newtree->namenode[newtree->nodefill+1].parent = -1;
00673 LinkTree(&newtree,(WORD)0,newtree->nodefill);
00674 newtree->headnode = newtree->nodefill » 1;
00675 M_free(nametree->namebuffer,"nametree->namebuffer");
00676 M_free(nametree->namenode,"nametree->namenode");
00677 nametree->namebuffer = newtree->namebuffer;
00678 nametree->namenode = newtree->namenode;
00679 nametree->namesize = newtree->namesize;
00680 nametree->namefill = newtree->namefill;
00681 nametree->nodesize = newtree->nodesize;
00682 nametree->nodefill = newtree->nodefill;
00683 nametree->oldnamefill = newtree->namefill;
00684 nametree->oldnodefill = newtree->nodefill;
00685 nametree->headnode = newtree->headnode;
00686
00687 /* DumpTree(nametree); */
00688 return(0);
00689 }
00690
00691 /*
00692 #] CompactifyTree :
00693 #[ CopyTree :
00694 */
00695
00696 void CopyTree(NAMETREE *newtree, NAMETREE *oldtree, WORD node, WORD par)
00697 {
00698     NAMENODE *n, *m;
00699     UBYTE *s, *t;
00700     n = oldtree->namenode+node;
00701     if ( n->left >= 0 ) CopyTree(newtree,oldtree,n->left,par);
00702     if ( n->type != CDELETE ) {
00703         m = newtree->namenode+newtree->nodefill;
00704         m->type = n->type;
00705         m->number = n->number;
00706         m->name = newtree->namefill;
00707         m->left = m->right = -1;
00708         m->balance = 0;
00709         switch ( n->type ) {
00710             case CSYMBOL:
00711                 if ( par == AUTONAMES ) {
00712                     autosymbols[n->number].name = newtree->namefill;
00713                     autosymbols[n->number].node = newtree->nodefill;
00714                 }
00715                 else {
00716                     symbols[n->number].name = newtree->namefill;
00717                     symbols[n->number].node = newtree->nodefill;
00718                 }
00719                 break;
00720             case CINDEK :
00721                 if ( par == AUTONAMES ) {
00722                     autoindices[n->number].name = newtree->namefill;
00723                     autoindices[n->number].node = newtree->nodefill;
00724                 }
00725                 else {
00726                     indices[n->number].name = newtree->namefill;
00727                     indices[n->number].node = newtree->nodefill;
00728                 }
00729                 break;
00730             case CVECTOR:

```

```

00731         if ( par == AUTONAMES ) {
00732             autovectors[n->number].name = newtree->namefill;
00733             autovectors[n->number].node = newtree->nodefill;
00734         }
00735         else {
00736             vectors[n->number].name = newtree->namefill;
00737             vectors[n->number].node = newtree->nodefill;
00738         }
00739         break;
00740     case CFUNCTION:
00741         if ( par == AUTONAMES ) {
00742             autofunctions[n->number].name = newtree->namefill;
00743             autofunctions[n->number].node = newtree->nodefill;
00744         }
00745         else {
00746             functions[n->number].name = newtree->namefill;
00747             functions[n->number].node = newtree->nodefill;
00748         }
00749         break;
00750     case CSET:
00751         Sets[n->number].name = newtree->namefill;
00752         Sets[n->number].node = newtree->nodefill;
00753         break;
00754     case CEXPRESSION:
00755         Expressions[n->number].name = newtree->namefill;
00756         Expressions[n->number].node = newtree->nodefill;
00757         break;
00758     case CDUBIOUS:
00759         Dubious[n->number].name = newtree->namefill;
00760         Dubious[n->number].node = newtree->nodefill;
00761         break;
00762     case CDOLLAR:
00763         Dollars[n->number].name = newtree->namefill;
00764         Dollars[n->number].node = newtree->nodefill;
00765         break;
00766     default:
00767         MesPrint("Illegal variable type in CopyTree: %d",n->type);
00768         break;
00769     }
00770     newtree->nodefill++;
00771     s = newtree->namebuffer + newtree->namefill;
00772     t = oldtree->namebuffer + n->name;
00773     while ( *t ) { *s++ = *t++; newtree->namefill++; }
00774     *s = 0; newtree->namefill++;
00775 }
00776 if ( n->right >= 0 ) CopyTree(newtree,oldtree,n->right,par);
00777 }
00778
00779 /*
00780 #] CopyTree :
00781 #[ LinkTree :
00782 */
00783
00784 void LinkTree(NAMETREE *tree, WORD offset, WORD numnodes)
00785 {
00786     /*
00787     Makes the tree into a binary tree
00788     */
00789     int med,numleft,numright,medleft,medright;
00790     med = numnodes » 1;
00791     numleft = med;
00792     numright = numnodes - med - 1;
00793     medleft = numleft » 1;
00794     medright = ( numright » 1 ) + med + 1;
00795     if ( numleft > 0 ) {
00796         tree->namenode[offset+med].left = offset+medleft;
00797         tree->namenode[offset+medleft].parent = offset+med;
00798     }
00799     if ( numright > 0 ) {
00800         tree->namenode[offset+med].right = offset+medright;
00801         tree->namenode[offset+medright].parent = offset+med;
00802     }
00803     if ( numleft > 0 ) LinkTree(tree,offset,numleft);
00804     if ( numright > 0 ) LinkTree(tree,offset+med+1,numright);
00805     while ( numleft && numright ) { numleft »= 1; numright »= 1; }
00806     if ( numleft ) tree->namenode[offset+med].balance = -1;
00807     else if ( numright ) tree->namenode[offset+med].balance = 1;
00808 }
00809
00810 /*
00811 #] LinkTree :
00812 #[ MakeNameTree :
00813 */
00814
00815 NAMETREE *MakeNameTree(void)
00816 {
00817     NAMETREE *n;

```

```

00818     n = (NAMETREE *)Malloc1(sizeof(NAMETREE),"new nametree");
00819     n->namebuffer = 0;
00820     n->namenode = 0;
00821     n->namesize = n->namefill = n->nodesize = n->nodefill =
00822     n->oldnamefill = n->oldnodefill = 0;
00823     n->globalnamefill = n->globalnodefill =
00824     n->clearnamefill = n->clearnodefill = 0;
00825     n->headnode = -1;
00826     return(n);
00827 }
00828
00829 /*
00830 #] MakeNameTree :
00831 #[ FreeNameTree :
00832 */
00833
00834 void FreeNameTree(NAMETREE *n)
00835 {
00836     if ( n ) {
00837         if ( n->namebuffer ) M_free(n->namebuffer,"nametree->namebuffer");
00838         if ( n->namenode ) M_free(n->namenode,"nametree->namenode");
00839         M_free(n,"nametree");
00840     }
00841 }
00842
00843 /*
00844 #] FreeNameTree :
00845 #[ WildcardNames :
00846 */
00847
00848 void ClearWildcardNames(void)
00849 {
00850     AC.NumWildcardNames = 0;
00851 }
00852
00853 int AddWildcardName(UBYTE *name)
00854 {
00855     GETIDENTITY
00856     int size = 0, tocopy, i;
00857     UBYTE *s = name, *t, *newbuffer;
00858     while ( *s ) { s++; size++; }
00859     for ( i = 0, t = AC.WildcardNames; i < AC.NumWildcardNames; i++ ) {
00860         s = name;
00861         while ( ( *s == *t ) && *s ) { s++; t++; }
00862         if ( *s == 0 && *t == 0 ) return(i+1);
00863         while ( *t ) t++;
00864         t++;
00865     }
00866     tocopy = t - AC.WildcardNames;
00867     if ( tocopy + size + 1 > AC.WildcardBufferSize ) {
00868         if ( AC.WildcardBufferSize == 0 ) {
00869             AC.WildcardBufferSize = size+1;
00870             if ( AC.WildcardBufferSize < 100 ) AC.WildcardBufferSize = 100;
00871         }
00872         else if ( size+1 >= AC.WildcardBufferSize ) {
00873             AC.WildcardBufferSize += size+1;
00874         }
00875         else {
00876             AC.WildcardBufferSize *= 2;
00877         }
00878         newbuffer = (UBYTE *)Malloc1((LONG)AC.WildcardBufferSize,"argument list names");
00879         t = newbuffer;
00880         if ( AC.WildcardNames ) {
00881             s = AC.WildcardNames;
00882             while ( tocopy > 0 ) { *t++ = *s++; tocopy--; }
00883             M_free(AC.WildcardNames,"AC.WildcardNames");
00884         }
00885         AC.WildcardNames = newbuffer;
00886         M_free(AT.WildArgTaken,"AT.WildArgTaken");
00887         AT.WildArgTaken = (WORD *)Malloc1((LONG)AC.WildcardBufferSize*sizeof(WORD)/2
00888             ,"argument list names");
00889     }
00890     s = name;
00891     while ( *s ) *t++ = *s++;
00892     *t = 0;
00893     AC.NumWildcardNames++;
00894     return(AC.NumWildcardNames);
00895 }
00896
00897 int GetWildcardName(UBYTE *name)
00898 {
00899     UBYTE *s, *t;
00900     int i;
00901     for ( i = 0, t = AC.WildcardNames; i < AC.NumWildcardNames; i++ ) {
00902         s = name;
00903         while ( ( *s == *t ) && *s ) { s++; t++; }
00904     }

```



```

00905         if ( *s == 0 && *t == 0 ) return(i+1);
00906         while ( *t ) t++;
00907         t++;
00908     }
00909     return(0);
00910 }
00911 /*
00912 #] WildcardNames :
00913 #[ AddSymbol :
00914
00915     The actual addition. Special routine for additions 'on the fly'
00916 */
00917 int AddSymbol(UBYTE *name, int minpow, int maxpow, int cplx, int dim)
00918 {
00919     int nodenum, numsymbol = AC.Symbols->num;
00920     UBYTE *s = name;
00921     SYMBOLS sym = (SYMBOLS)FromVarList(AC.Symbols);
00922     bzero(sym,sizeof(struct SyMbOl));
00923     sym->name = AddName(*AC.activenames,name,CSYMBOL,numsymbol,&nodenum);
00924     sym->minpower = minpow;
00925     sym->maxpower = maxpow;
00926     sym->complex = cplx;
00927     sym->flags = 0;
00928     sym->node = nodenum;
00929     sym->dimension= dim;
00930     while ( *s ) s++;
00931     sym->namesize = (s-name)+1;
00932     return(numsymbol);
00933 }
00934 /*
00935 #] AddSymbol :
00936 #[ CoSymbol :
00937
00938     Symbol declarations.  name[#{R|I|C}][{([min]:[max])}]
00939     Note that we know already that the parentheses match properly
00940 */
00941 int CoSymbol(UBYTE *s)
00942 {
00943     int type, error = 0, minpow, maxpow, cplx, sgn, dim;
00944     WORD numsymbol;
00945     UBYTE *name, *oldc, c, cc;
00946     do {
00947         minpow = -MAXPOWER;
00948         maxpow = MAXPOWER;
00949         cplx = 0;
00950         dim = 0;
00951         name = s;
00952         if ( ( s = SkipAName(s) ) == 0 ) {
00953             IllForm: MesPrint("&Illegally formed name in symbol statement");
00954             error = 1;
00955             s = SkipField(name,0);
00956             goto eol;
00957         }
00958         oldc = s; cc = c = *s; *s = 0;
00959         if ( TestName(name) ) { *s = c; goto IllForm; }
00960         if ( cc == '#' ) {
00961             s++;
00962             if ( tolower(*s) == 'r' ) cplx = VARTYPENONE;
00963             else if ( tolower(*s) == 'c' ) cplx = VARTYPECOMPLEX;
00964             else if ( tolower(*s) == 'i' ) cplx = VARTYPEIMAGINARY;
00965             else if ( ( ( *s == '-' || *s == '+' || *s == '=' )
00966                 && ( s[1] >= '0' && s[1] <= '9' ) )
00967                 || ( *s >= '0' && *s <= '9' ) ) {
00968                 LONG x;
00969                 sgn = 0;
00970                 if ( *s == '-' ) { sgn = VARTYPEMINUS; s++; }
00971                 else if ( *s == '+' || *s == '=' ) { sgn = 0; s++; }
00972                 x = *s - '0';
00973                 while ( s[1] >= '0' && s[1] <= '9' ) {
00974                     x = 10*x + (s[1] - '0'); s++;
00975                 }
00976                 if ( x >= MAXPOWER || x <= 1 ) {
00977                     MesPrint("&Illegal value for root of unity %s",name);
00978                     error = 1;
00979                 }
00980                 else {
00981                     maxpow = x;
00982                 }
00983                 cplx = VARTYPEROOTOFUNITY | sgn;
00984             }
00985             else {
00986                 MesPrint("&Illegal specification for complexity of symbol %s",name);
00987             }
00988         }
00989     } while (1);
00990 }

```

```

00992         *oldc = c;
00993         error = 1;
00994         s = SkipField(s,0);
00995         goto eol;
00996     }
00997     s++; cc = *s;
00998 }
00999 if ( cc == '{' ) {
01000     s++;
01001     if ( ( *s == 'd' || *s == 'D' ) && s[1] == '=' ) {
01002         s += 2;
01003         if ( *s == '-' || *s == '+' || FG.cTable[*s] == 1 ) {
01004             ParseSignedNumber(dim,s)
01005             if ( dim < -HALFMAX || dim > HALFMAX ) {
01006                 MesPrint("&Warning: dimension of %s (%d) out of range"
01007                     ,name,dim);
01008             }
01009         }
01010         if ( *s != '}' ) goto IllDim;
01011         else s++;
01012     }
01013     else {
01014 IllDim:
01015         MesPrint("&Error: Illegal dimension field for variable %s",name);
01016         error = 1;
01017         s = SkipField(s,0);
01018         goto eol;
01019     }
01020     cc = *s;
01021     if ( cc == '(' ) {
01022         if ( ( cplx & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY ) {
01023             MesPrint("&Root of unity property for %s cannot be combined with power
restrictions",name);
01024             error = 1;
01025         }
01026         s++;
01027         if ( *s == '-' || *s == '+' || FG.cTable[*s] == 1 ) {
01028             ParseSignedNumber(minpow,s)
01029             if ( minpow < -MAXPOWER ) {
01030                 minpow = -MAXPOWER;
01031                 if ( AC.WarnFlag )
01032                     MesPrint("&Warning: minimum power of %s corrected to %d"
01033                         ,name,-MAXPOWER);
01034             }
01035         }
01036         if ( *s != ':' ) {
01037 skippar:
01038             error = 1;
01039             s = SkipField(s,1);
01040             goto eol;
01041         }
01042         else s++;
01043         if ( *s == '-' || *s == '+' || FG.cTable[*s] == 1 ) {
01044             ParseSignedNumber(maxpow,s)
01045             if ( maxpow > MAXPOWER ) {
01046                 maxpow = MAXPOWER;
01047                 if ( AC.WarnFlag )
01048                     MesPrint("&Warning: maximum power of %s corrected to %d"
01049                         ,name,MAXPOWER);
01050             }
01051         }
01052         if ( *s != ')' ) goto skippar;
01053         s++;
01054     }
01055     if ( ( AC.AutoDeclareFlag == 0 &&
01056         ( ( type = GetName(AC.exprnames,name,&numsymbol,NOAUTO) )
01057         != NAMENOTFOUND ) )
01058     || ( ( type = GetName(*AC.activenames,name,&numsymbol,NOAUTO) ) != NAMENOTFOUND ) ) {
01059         if ( type != CSYMBOL ) error = NameConflict(type,name);
01060         else {
01061             SYMBOLS sym = (SYMBOLS)(AC.Symbols->lijst) + numsymbol;
01062             if ( ( numsymbol == AC.lPolyFunVar ) && ( AC.lPolyFunType > 0 )
01063                 && ( AC.lPolyFun != 0 ) && ( minpow > -MAXPOWER || maxpow < MAXPOWER ) ) {
01064                 MesPrint("&The symbol %s is used by power expansions in the PolyRatFun!",name);
01065                 error = 1;
01066             }
01067             sym->complex = cplx;
01068             sym->minpower = minpow;
01069             sym->maxpower = maxpow;
01070             sym->dimension= dim;
01071         }
01072     }
01073     else {
01074         AddSymbol(name,minpow,maxpow,cplx,dim);
01075     }
01076     *oldc = c;
01077     while ( *s == ',' ) s++;
01078 } while ( *s );

```

```

01078     return(error);
01079 }
01080
01081 /*
01082 #] CoSymbol :
01083 #[ AddIndex :
01084
01085 The actual addition. Special routine for additions 'on the fly'
01086 */
01087
01088 int AddIndex(UBYTE *name, int dim, int dim4)
01089 {
01090     int nodenum, numindex = AC.Indices->num;
01091     INDICES ind = (INDICES)FromVarList(AC.Indices);
01092     UBYTE *s = name;
01093     bzero(ind, sizeof(struct InDeX));
01094     ind->name = AddName(*AC.activenames, name, CINDEX, numindex, &nodenum);
01095     ind->type = 0;
01096     ind->dimension = dim;
01097     ind->flags = 0;
01098     ind->nmin4 = dim4;
01099     ind->node = nodenum;
01100     while ( *s ) s++;
01101     ind->namesize = (s-name)+1;
01102     return(numindex);
01103 }
01104
01105 /*
01106 #] AddIndex :
01107 #[ CoIndex :
01108
01109 Index declarations. name[={number|symbol[:othersymbol]}]
01110 */
01111
01112 int CoIndex(UBYTE *s)
01113 {
01114     int type, error = 0, dim, dim4;
01115     WORD numindex;
01116     UBYTE *name, *oldc, c;
01117     do {
01118         dim = AC.lDefDim;
01119         dim4 = AC.lDefDim4;
01120         name = s;
01121         if ( ( s = SkipAName(s) ) == 0 ) {
01122             IllForm: MesPrint("&Illegally formed name in index statement");
01123             error = 1;
01124             s = SkipField(name,0);
01125             goto eol;
01126         }
01127         oldc = s; c = *s; *s = 0;
01128         if ( TestName(name) ) { *s = c; goto IllForm; }
01129         if ( c == '=' ) {
01130             s++;
01131             if ( ( s = DoDimension(s,&dim,&dim4) ) == 0 ) {
01132                 *oldc = c;
01133                 error = 1;
01134                 s = SkipField(name,0);
01135                 goto eol;
01136             }
01137         }
01138         if ( ( AC.AutoDeclareFlag == 0 &&
01139             ( ( type = GetName(AC.exprnames,name,&numindex,NOAUTO) )
01140               != NAMENOTFOUND ) )
01141             || ( ( type = GetName(*AC.activenames,name,&numindex,NOAUTO) ) != NAMENOTFOUND ) ) {
01142             if ( type != CINDEX ) error = NameConflict(type,name);
01143             else { /* reset the dimensions */
01144                 indices[numindex].dimension = dim;
01145                 indices[numindex].nmin4 = dim4;
01146             }
01147         }
01148         else AddIndex(name,dim,dim4);
01149         *oldc = c;
01150     eol: while ( *s == ',' ) s++;
01151     } while ( *s );
01152     return(error);
01153 }
01154
01155 /*
01156 #] CoIndex :
01157 #[ DoDimension :
01158 */
01159
01160 UBYTE *DoDimension(UBYTE *s, int *dim, int *dim4)
01161 {
01162     UBYTE c, *t = s;
01163     int type, error = 0;
01164     WORD numsymbol;

```

```

01165     NAMETREE **oldtree = AC.activenames;
01166     LIST* oldsymbols = AC.Symbols;
01167     *dim4 = -NMIN4SHIFT;
01168     if ( FG.cTable[*s] == 1 ) {
01169 retry:
01170         ParseNumber(*dim,s)
01171     #if ( BITSINWORD/8 < 4 )
01172         if ( *dim >= (1 << (BITSINWORD-1)) ) goto illeg;
01173     #endif
01174         *dim4 = *dim - 4;
01175         return(s);
01176     }
01177     else if ( ( FG.cTable[*s] == 0 ) || ( *s == '[' ) )
01178         && ( s = SkipAName(s) ) != 0 ) {
01179         AC.activenames = &(AC.varnames);
01180         AC.Symbols = &(AC.SymbolList);
01181         c = *s; *s = 0;
01182         if ( ( type = GetName(AC.exprnames,t,&numsymbol,NOAUTO) ) != NAMENOTFOUND )
01183         || ( ( type = GetName(AC.varnames,t,&numsymbol,WITHAUTO) ) != NAMENOTFOUND ) ) {
01184             if ( type != CSYMBOL ) error = NameConflict(type,t);
01185         }
01186         else {
01187             numsymbol = AddSymbol(t,-MAXPOWER,MAXPOWER,0,0);
01188             if ( AC.WarnFlag )
01189                 MesPrint("&Warning: Implicit declaration of %s as a symbol",t);
01190         }
01191         *dim = -numsymbol;
01192         if ( ( *s = c ) == ':' ) {
01193             s++;
01194             t = s;
01195             if ( ( s = SkipAName(s) ) == 0 ) goto illeg;
01196             if ( ( ( type = GetName(AC.exprnames,t,&numsymbol,NOAUTO) ) != NAMENOTFOUND )
01197             || ( ( type = GetName(AC.varnames,t,&numsymbol,WITHAUTO) ) != NAMENOTFOUND ) ) ) {
01198                 if ( type != CSYMBOL ) error = NameConflict(type,t);
01199             }
01200             else {
01201                 numsymbol = AddSymbol(t,-MAXPOWER,MAXPOWER,0,0);
01202                 if ( AC.WarnFlag )
01203                     MesPrint("&Warning: Implicit declaration of %s as a symbol",t);
01204             }
01205             *dim4 = -numsymbol-NMIN4SHIFT;
01206         }
01207     }
01208     else if ( *s == '+' && FG.cTable[s[1]] == 1 ) {
01209         s++; goto retry;
01210     }
01211     else {
01212 illeg: MesPrint("&Illegal dimension specification. Should be number >= 0, symbol or symbol:symbol");
01213         return(0);
01214     }
01215     AC.Symbols = oldsymbols;
01216     AC.activenames = oldtree;
01217     if ( error ) return(0);
01218     return(s);
01219 }
01220
01221 /*
01222 #] DoDimension :
01223 #[ CoDimension :
01224 */
01225
01226 int CoDimension(UBYTE *s)
01227 {
01228     s = DoDimension(s,&AC.lDefDim,&AC.lDefDim4);
01229     if ( s == 0 ) return(1);
01230     if ( *s != 0 ) {
01231         MesPrint("&Argument of dimension statement should be number >= 0, symbol or symbol:symbol");
01232         return(1);
01233     }
01234     return(0);
01235 }
01236
01237 /*
01238 #] CoDimension :
01239 #[ AddVector :
01240
01241     The actual addition. Special routine for additions 'on the fly'
01242 */
01243
01244 int AddVector(UBYTE *name, int cplx, int dim)
01245 {
01246     int nodenum, numvector = AC.Vectors->num;
01247     VECTORS v = (VECTORS)FromVarList(AC.Vectors);
01248     UBYTE *s = name;
01249     bzero(v,sizeof(struct VeCtOr));
01250     v->name = AddName(&AC.activenames,name,CVECTOR,numvector,&nodenum);
01251     v->complex = cplx;

```

```

01252     v->node      = nodenum;
01253     v->dimension = dim;
01254     v->flags = 0;
01255     while ( *s ) s++;
01256     v->namesize = (s-name)+1;
01257     return(numvector);
01258 }
01259
01260 /*
01261  #] AddVector :
01262  #[ CoVector :
01263
01264  Vector declarations. The descriptor string is "(,%n)"
01265 */
01266
01267 int CoVector(UBYTE *s)
01268 {
01269     int type, error = 0, dim;
01270     WORD numvector;
01271     UBYTE *name, c, *endname;
01272     do {
01273         name = s;
01274         dim = 0;
01275         if ( ( s = SkipAName(s) ) == 0 ) {
01276 IllForm:      MesPrint("&Illegally formed name in vector statement");
01277                 error = 1;
01278                 s = SkipField(s,0);
01279             }
01280             else {
01281                 c = *s; *s = 0, endname = s;
01282                 if ( TestName(name) ) { *s = c; goto IllForm; }
01283                 if ( c == '{' ) {
01284                     s++;
01285                     if ( ( *s == 'd' || *s == 'D' ) && s[1] == '=' ) {
01286                         s += 2;
01287                         if ( *s == '-' || *s == '+' || FG.cTable[*s] == 1 ) {
01288                             ParseSignedNumber(dim,s)
01289                             if ( dim < -HALFMAX || dim > HALFMAX ) {
01290                                 MesPrint("&Warning: dimension of %s (%d) out of range"
01291                                     ,name,dim);
01292                             }
01293                         }
01294                         if ( *s != '}' ) goto IllDim;
01295                         else s++;
01296                     }
01297                     else {
01298 IllDim:        MesPrint("&Error: Illegal dimension field for variable %s",name);
01299                     error = 1;
01300                     s = SkipField(s,0);
01301                     while ( *s == ',' ) s++;
01302                     continue;
01303                 }
01304             }
01305             if ( ( AC.AutoDeclareFlag == 0 &&
01306                 ( ( type = GetName(AC.exprnames,name,&numvector,NOAUTO) )
01307                   != NAMENOTFOUND ) )
01308                 || ( ( type = GetName(*AC.activenames,name,&numvector,NOAUTO) ) != NAMENOTFOUND ) ) {
01309                 if ( type != CVECTOR ) error = NameConflict(type,name);
01310             }
01311             else AddVector(name,0,dim);
01312             *endname = c;
01313         }
01314         while ( *s == ',' ) s++;
01315     } while ( *s );
01316     return(error);
01317 }
01318
01319 /*
01320  #] CoVector :
01321  #[ AddFunction :
01322
01323  The actual addition. Special routine for additions 'on the fly'
01324 */
01325
01326 int AddFunction(UBYTE *name, int comm, int istensor, int cplx, int symprop, int dim, int argmax, int
    argmin)
01327 {
01328     int nodenum, numfunction = AC.Functions->num;
01329     FUNCTIONS fun = (FUNCTIONS)FromVarList(AC.Functions);
01330     UBYTE *s = name;
01331     bzero(fun,sizeof(struct FuNcTiOn));
01332     fun->name = AddName(*AC.activenames,name,CFUNCTION,numfunction,&nodenum);
01333     fun->commute = comm;
01334     fun->spec = istensor;
01335     fun->complex = cplx;
01336     fun->tabl = 0;
01337     fun->flags = 0;

```

```

01338     fun->node = nodenum;
01339     fun->symminfo = 0;
01340     fun->symmetric = symprop;
01341     fun->dimension = dim;
01342     fun->maxnumargs = argmax;
01343     fun->minnumargs = argmin;
01344     while ( *s ) s++;
01345     fun->namesize = (s-name)+1;
01346     return(numfunction);
01347 }
01348
01349 /*
01350 #] AddFunction :
01351 #[ CoCommutateInSet :
01352
01353 Commuting, f1, ..., fn;
01354 */
01355
01356 int CoCommutateInSet(UBYTE *s)
01357 {
01358     UBYTE *name, *ss, c, *start = s;
01359     WORD number, type, *g, *gg;
01360     int error = 0, i, len = StrLen(s), len2 = 0;
01361     if ( AC.CommutateInSet != 0 ) {
01362         g = AC.CommutateInSet;
01363         while ( *g ) g += *g;
01364         len2 = g - AC.CommutateInSet;
01365         if ( len2+len+3 > AC.SizeCommutateInSet ) {
01366             gg = (WORD *)Malloca1((len2+len+3)*sizeof(WORD), "CommutateInSet");
01367             for ( i = 0; i < len2; i++ ) gg[i] = AC.CommutateInSet[i];
01368             gg[len2] = 0;
01369             M_free(AC.CommutateInSet, "CommutateInSet");
01370             AC.CommutateInSet = gg;
01371             AC.SizeCommutateInSet = len+len2+3;
01372             g = AC.CommutateInSet+len2;
01373         }
01374     }
01375     else {
01376         AC.SizeCommutateInSet = len+2;
01377         g = AC.CommutateInSet = (WORD *)Malloca1((len+3)*sizeof(WORD), "CommutateInSet");
01378         *g = 0;
01379     }
01380     gg = g++;
01381     ss = s-1;
01382     for(;;) {
01383         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01384         if ( *s == 0 ) {
01385             if ( s - start >= len ) break;
01386             *s = ' '; s++;
01387             *g = 0;
01388             *gg = g-gg;
01389             if ( *gg < 2 ) {
01390                 MesPrint("&There should be at least two noncommuting functions or tensors in a
commuting statement.");
01391                 error = 1;
01392             }
01393             else if ( *gg == 2 ) {
01394                 gg[2] = gg[1]; gg[3] = 0; gg[0] = 3;
01395             }
01396             gg = g++;
01397             continue;
01398         }
01399         if ( s > ss ) {
01400             if ( *s != '{' ) {
01401                 MesPrint("&The CommutateInSet statement should have sets enclosed in {}.");
01402                 error = 1;
01403                 break;
01404             }
01405             ss = s;
01406             SKIPBRA2(ss) /* Note that parentheses were tested before */
01407             *ss = 0;
01408             s++;
01409         }
01410         name = s;
01411         s = SkipAName(s);
01412         c = *s; *s = 0;
01413         if ( ( type = GetName(AC.varnames, name, &number, NOAUTO) ) != CFUNCTION ) {
01414             MesPrint("&%s is not a function or tensor", name);
01415             error = 1;
01416         }
01417         else if ( functions[number].commute == 0 ){
01418             MesPrint("&%s is not a noncommuting function or tensor", name);
01419             error = 1;
01420         }
01421         else {
01422             *g++ = number+FUNCTION;
01423             functions[number].flags |= COULDCOMMUTE;

```

```

01424         if ( number+FUNCTION >= GAMMA && number+FUNCTION <= GAMMASEVEN ) {
01425             functions[GAMMA-FUNCTION].flags |= COULDCOMMUTE;
01426             functions[GAMMAI-FUNCTION].flags |= COULDCOMMUTE;
01427             functions[GAMMAFIVE-FUNCTION].flags |= COULDCOMMUTE;
01428             functions[GAMMASIX-FUNCTION].flags |= COULDCOMMUTE;
01429             functions[GAMMASEVEN-FUNCTION].flags |= COULDCOMMUTE;
01430         }
01431     }
01432     *s = c;
01433 }
01434 return(error);
01435 }
01436
01437 /*
01438 #] CoCommuteInSet :
01439 #[ CoFunction + ...:
01440
01441 Function declarations.
01442 The second parameter indicates commutation properties.
01443 The third parameter tells whether we have a tensor.
01444 */
01445
01446 int CoFunction(UBYTE *s, int comm, int istensor)
01447 {
01448     int type, error = 0, cplx, symtype, dim, argmax, argmin;
01449     WORD numfunction, reverseorder = 0, addone;
01450     UBYTE *name, *oldc, *par, c, cc;
01451     do {
01452         symtype = cplx = 0, argmin = argmax = -1;
01453         dim = 0;
01454         name = s;
01455         if ( ( s = SkipAName(s) ) == 0 ) {
01456             IllForm: MesPrint("&Illegally formed function/tensor name");
01457             error = 1;
01458             s = SkipField(name,0);
01459             goto eol;
01460         }
01461         oldc = s; cc = c = *s; *s = 0;
01462         if ( TestName(name) ) { *s = c; goto IllForm; }
01463         if ( c == '#' ) {
01464             s++;
01465             if ( tolower(*s) == 'r' ) cplx = VARTYPENONE;
01466             else if ( tolower(*s) == 'c' ) cplx = VARTYPECOMPLEX;
01467             else if ( tolower(*s) == 'i' ) cplx = VARTYPEIMAGINARY;
01468             else {
01469                 MesPrint("&Illegal specification for complexity of %s",name);
01470                 *oldc = c;
01471                 error = 1;
01472                 s = SkipField(s,0);
01473                 goto eol;
01474             }
01475             s++; cc = *s;
01476         }
01477         if ( cc == '{' ) {
01478             s++;
01479             if ( ( *s == 'd' || *s == 'D' ) && s[1] == '=' ) {
01480                 s += 2;
01481                 if ( *s == '-' || *s == '+' || FG.cTable[*s] == 1 ) {
01482                     ParseSignedNumber(dim,s)
01483                     if ( dim < -HALFMAX || dim > HALFMAX ) {
01484                         MesPrint("&Warning: dimension of %s (%d) out of range",
01485                             name,dim);
01486                     }
01487                 }
01488                 if ( *s != '}' ) goto IllDim;
01489                 else s++;
01490             }
01491             else {
01492                 IllDim: MesPrint("&Error: Illegal dimension field for variable %s",name);
01493                 error = 1;
01494                 s = SkipField(s,0);
01495                 goto eol;
01496             }
01497             cc = *s;
01498         }
01499         if ( cc == '(' ) {
01500             s++;
01501             if ( *s == '-' ) {
01502                 reverseorder = REVERSEORDER;
01503                 s++;
01504             }
01505             else {
01506                 reverseorder = 0;
01507             }
01508             par = s;
01509             while ( FG.cTable[*s] == 0 ) s++;
01510             cc = *s; *s = 0;

```

```

01511         if ( s <= par ) {
01512     illegsym:      *s = cc;
01513                   MesPrint("&Illegal specification for symmetry of %s",name);
01514                   *oldc = c;
01515                   error = 1;
01516                   s = SkipField(s,1);
01517                   goto eol;
01518               }
01519               if ( StrICont(par,(UBYTE *)"symmetric") == 0 ) symtype = SYMMETRIC;
01520               else if ( StrICont(par,(UBYTE *)"antisymmetric") == 0 ) symtype = ANTISYMMETRIC;
01521               else if ( ( StrICont(par,(UBYTE *)"cyclesymmetric") == 0 )
01522                 || ( StrICont(par,(UBYTE *)"cyclic") == 0 ) ) symtype = CYCLESYMMETRIC;
01523               else if ( ( StrICont(par,(UBYTE *)"rcyclesymmetric") == 0 )
01524                 || ( StrICont(par,(UBYTE *)"rcyclic") == 0 )
01525                 || ( StrICont(par,(UBYTE *)"reversecyclic") == 0 ) ) symtype = RCYCLESYMMETRIC;
01526               else goto illegsym;
01527               *s = cc;
01528               if ( *s != ' ' || ( s[1] && s[1] != ',' && s[1] != '<' ) ) {
01529                 Warning("&Excess information in symmetric properties currently ignored");
01530                 s = SkipField(s,1);
01531               }
01532               else s++;
01533               symtype |= reverseorder;
01534               cc = *s;
01535           }
01536     retry:;
01537     if ( cc == '<' ) {
01538         s++; addone = 0;
01539         if ( *s == '=' ) { addone++; s++; }
01540         argmax = 0;
01541         while ( FG.cTable[*s] == 1 ) { argmax = 10*argmax + *s++ - '0'; }
01542         argmax += addone;
01543         par = s;
01544         while ( FG.cTable[*s] == 0 ) s++;
01545         if ( s > par ) {
01546             cc = *s; *s = 0;
01547             if ( ( StrICont(par,(UBYTE *)"arguments") == 0 )
01548               || ( StrICont(par,(UBYTE *)"args") == 0 ) ) {}
01549             else {
01550                 Warning("&Illegal information in number of arguments properties currently
01551     ignored");
01552                 error = 1;
01553                 *s = cc;
01554             }
01555             if ( argmax <= 0 ) {
01556                 MesPrint("&Error: Cannot have fewer than 0 arguments for variable %s",name);
01557                 error = 1;
01558             }
01559             cc = *s;
01560         }
01561     if ( cc == '>' ) {
01562         s++; addone = 1;
01563         if ( *s == '=' ) { addone = 0; s++; }
01564         argmin = 0;
01565         while ( FG.cTable[*s] == 1 ) { argmin = 10*argmin + *s++ - '0'; }
01566         argmin += addone;
01567         par = s;
01568         while ( FG.cTable[*s] == 0 ) s++;
01569         if ( s > par ) {
01570             cc = *s; *s = 0;
01571             if ( ( StrICont(par,(UBYTE *)"arguments") == 0 )
01572               || ( StrICont(par,(UBYTE *)"args") == 0 ) ) {}
01573             else {
01574                 Warning("&Illegal information in number of arguments properties currently
01575     ignored");
01576                 error = 1;
01577                 *s = cc;
01578             }
01579             cc = *s;
01580         }
01581         if ( cc == '<' ) goto retry;
01582         if ( ( AC.AutoDeclareFlag == 0 &&
01583           ( ( type = GetName(AC.exprnames,name,&numfunction,NOAUTO) )
01584             != NAMENOTFOUND ) )
01585           || ( ( type = GetName(*AC.activenames,name,&numfunction,NOAUTO) ) != NAMENOTFOUND ) ) {
01586             if ( type != CFUNCTION ) error = NameConflict(type,name);
01587             else {
01588     /*      FUNCTIONS fun = (FUNCTIONS) (AC.Functions->lijst) + numfunction-FUNCTION; */
01589             FUNCTIONS fun = (FUNCTIONS) (AC.Functions->lijst) + numfunction;
01590
01591             if ( fun->tabl != 0 ) {
01592                 MesPrint("&Illegal attempt to change table into function");
01593                 error = 1;
01594             }
01595         }

```



```

01596         fun->complex = cplx;
01597         fun->commute = comm;
01598         if ( istensor && fun->spec == 0 ) {
01599             MesPrint("&Function %s changed to tensor",name);
01600             error = 1;
01601         }
01602         else if ( istensor == 0 && fun->spec > 0 ) {
01603             MesPrint("&Tensor %s changed to function",name);
01604             error = 1;
01605         }
01606         else if ( fun->spec == VERTEXFUNCTION ) {
01607             MesPrint("&Function or Tensor %s already declared as a Particle",name);
01608             error = 1;
01609         }
01610         fun->spec = istensor;
01611         if ( fun->symmetric != symtype ) {
01612             fun->symmetric = symtype;
01613             AC.SymChangeFlag = 1;
01614         }
01615         fun->maxnumargs = argmax;
01616         fun->minnumargs = argmin;
01617     }
01618 }
01619 else {
01620     AddFunction(name,comm,istensor,cplx,symtype,dim,argmax,argmin);
01621 }
01622 *oldc = c;
01623 eol: while ( *s == ',' ) s++;
01624 } while ( *s );
01625 return(error);
01626 }
01627
01628 int CoNFunction(UBYTE *s) { return(CoFunction(s,1,0)); }
01629 int CoCFunction(UBYTE *s) { return(CoFunction(s,0,0)); }
01630 int CoNTensor(UBYTE *s) { return(CoFunction(s,1,2)); }
01631 int CoCTensor(UBYTE *s) { return(CoFunction(s,0,2)); }
01632
01633 /*
01634 #] CoFunction + ...:
01635 #[ DoTable :
01636
01637     Syntax:
01638     Table [check] [strict|relax] [zerofill] name(:1:2,...,regular arguments);
01639     name must be the name of a regular function.
01640     the table indices must be the first arguments.
01641     The parenthesis indicates 'name' as opposed to the options.
01642
01643     We leave behind:
01644     a struct tabl in the FUNCTION struct
01645     Regular table:
01646         an array tablepointers for the pointers to elements of rhs
01647         in the compiler struct cbuf[T->bufnum]
01648         an array MINMAX T->mm with the minima and maxima
01649         a prototype array
01650         an offset in the compiler buffer for the pattern to be matched
01651     Sparse table:
01652         Just the number of dimensions
01653         We will keep track of the number of defined elements in totind
01654         and in tablepointers we will have numind+1 positions for each
01655         element. The first numind elements for the indices and the
01656         last one for the element in cbuf[T->bufnum].rhs
01657
01658         If the number of dimensions is *<number>, there is not a fixed
01659         number of dimensions. Just a maximum. In that case the first
01660         index should be the number of other dimensions. This first index
01661         does not count in <number>.
01662
01663     Complication: to preserve speed we need a prototype and a pattern
01664     for each thread when we use WITHPTHREADS. This is because we write
01665     into those when looking for the pattern.
01666 */
01667
01668 static int nwarntab = 1;
01669
01670 int DoTable(UBYTE *s, int par)
01671 {
01672     GETIDENTITY
01673     UBYTE *name, *p, *inp, c;
01674     int i, j, k, sparseflag = 0, rflag = 0, checkflag = 0;
01675     int error = 0, ret, oldcbufnum, oldEside;
01676     WORD funnum, type, *OldWork, *w, *ww, *t, *tt, *flags1, oldnumrhs,oldnumlhs;
01677     LONG oldcpointer;
01678     MINMAX *mm, *mm1;
01679     LONG x, y;
01680     TABLES T;
01681     CBUF *C;
01682

```

```

01683     while ( *s == ',' ) s++;
01684     do {
01685         name = s;
01686         if ( ( s = SkipAName(s) ) == 0 ) {
01687 I1lForm:     MesPrint("&Illegal name or option in table declaration");
01688             return(1);
01689         }
01690         c = *s; *s = 0;
01691         if ( TestName(name) ) { *s = c; goto I1lForm; }
01692         *s = c;
01693         if ( *s == '(' ) break;
01694         if ( *s != ',' ) {
01695             MesPrint("&Illegal definition of table");
01696             return(1);
01697         }
01698         *s = 0;
01699     /*
01700     Secondary options
01701     */
01702     if ( StrICmp(name, (UBYTE *)("check" )) == 0 ) checkflag = 1;
01703     else if ( StrICmp(name, (UBYTE *)("zero" )) == 0 ) checkflag = 2;
01704     else if ( StrICmp(name, (UBYTE *)("one" )) == 0 ) checkflag = 3;
01705     else if ( StrICmp(name, (UBYTE *)("strict")) == 0 ) rflag = 1;
01706     else if ( StrICmp(name, (UBYTE *)("relax" )) == 0 ) rflag = -1;
01707     else if ( StrICmp(name, (UBYTE *)("zerofill" )) == 0 ) { rflag = -2; checkflag = 2; }
01708     else if ( StrICmp(name, (UBYTE *)("onefill" )) == 0 ) { rflag = -3; checkflag = 3; }
01709     else if ( StrICmp(name, (UBYTE *)("sparse")) == 0 ) sparseflag |= 1;
01710     else if ( StrICmp(name, (UBYTE *)("base")) == 0 ) sparseflag |= 3;
01711     else if ( StrICmp(name, (UBYTE *)("tablebase")) == 0 ) sparseflag |= 3;
01712     else {
01713         MesPrint("&Illegal option in table definition: '%s'",name);
01714         error = 1;
01715     }
01716     *s++ = ',';
01717     while ( *s == ',' ) s++;
01718 } while ( *s );
01719 if ( name == s || *s == 0 ) {
01720     MesPrint("&Illegal name or option in table declaration");
01721     return(1);
01722 }
01723 *s = 0; /* *s could only have been a parenthesis */
01724 if ( sparseflag ) {
01725     if ( checkflag == 1 ) rflag = 0;
01726     else if ( checkflag == 2 ) rflag = -2;
01727     else if ( checkflag == 3 ) rflag = -3;
01728     else rflag = -1;
01729 }
01730 if ( ( ret = GetVar(name,&type,&funnum,CFUNCTION,NOAUTO) ) ==
01731     NAMENOTFOUND ) {
01732     if ( par == 0 ) {
01733         funnum = EntVar(CFUNCTION,name,0,1,0,0);
01734     }
01735     else if ( par == 1 || par == 2 ) {
01736         funnum = EntVar(CFUNCTION,name,0,0,0,0);
01737     }
01738 }
01739 else if ( ret <= 0 ) {
01740     funnum = EntVar(CFUNCTION,name,0,0,0,0);
01741     error = 1;
01742 }
01743 else {
01744     if ( par == 2 ) {
01745         if ( nwarntab ) {
01746             Warning("Table now declares its (commuting) function.");
01747             Warning("Earlier definition in Function statement obsolete. Please remove.");
01748             nwarntab = 0;
01749         }
01750     }
01751     else {
01752         error = 1;
01753         MesPrint("&(N)(C)Tables should not be declared previously");
01754     }
01755 }
01756 if ( functions[funnum].spec > 0 ) {
01757     MesPrint("&Tensors cannot become tables");
01758     return(1);
01759 }
01760 if ( functions[funnum].symmetric > 0 ) {
01761     MesPrint("&Functions with nontrivial symmetrization properties cannot become tables");
01762     return(1);
01763 }
01764 if ( functions[funnum].tabl ) {
01765     MesPrint("&Redefinition of an existing table is not allowed.");
01766     return(1);
01767 }
01768 functions[funnum].tabl = T = (TABLES)Malloc1(sizeof(struct TaBles), "table");
01769 /*

```

```

01770     Next we find the size of the table (if it is not sparse)
01771  */
01772     T->defined = T->mdefined = 0; T->sparse = sparseflag; T->mm = 0; T->flags = 0;
01773     T->numtree = 0; T->rootnum = 0; T->MaxTreeSize = 0;
01774     T->boomlijst = 0;
01775     T->strict = rflag;
01776     T->bounds = checkflag;
01777     T->bufnum = inicbufs();
01778     T->argtail = 0;
01779     T->sparse = 0;
01780     T->buffersize = 8;
01781     T->buffers = (WORD *)Malloc1(sizeof(WORD)*T->buffersize,"Table buffers");
01782     T->buffersfill = 0;
01783     T->buffers[T->buffersfill++] = T->bufnum;
01784     T->mode = 0;
01785     T->numdummies = 0;
01786     mm = T->mm;
01787     T->numind = 0;
01788     if ( rflag > 0 ) AC.MustTestTable++;
01789     T->totind = 0;      /* Table hasn't been checked */
01790
01791     p = s; *s = '(';
01792     if ( sparseflag ) {
01793  /*
01794         First copy the tail, just in case we will construct a tablebase
01795         Note that we keep the ( to indicate a tail
01796         The actual arguments can be found after the comma. Before we have
01797         the dimension which the tablebase will need for consistency checking.
01798  */
01799         inp = p+1;
01800         SKIPBRA3(inp)
01801         c = *inp; *inp = 0;
01802         T->argtail = strDup1(p,"argtail");
01803         *inp = c;
01804  /*
01805         Now the regular compilation
01806  */
01807         inp = p++;
01808         if ( *p == '<' ) {
01809             WORD inc = 1;
01810             p++;
01811             if ( *p == '=' ) { inc++; p++; }
01812  /*
01813             We will use one extra number for telling how many there really are.
01814  */
01815             x = 0;
01816             while ( *p <= '9' && *p >= '0' ) x = 10*x + (*p++-'0');
01817             x = -x-inc;
01818             if ( x == -1 ) {
01819                 MesPrint("&Maximum number of dimensions in *-table should be at least one.");
01820                 error = 1;
01821                 goto FinishUp2;
01822             }
01823         }
01824         else {
01825             ParseNumber(x,p)
01826             if ( FG.cTable[p[-1]] != 1 || ( *p != ',' && *p != ')' ) ) {
01827                 p = inp;
01828                 MesPrint("&First argument in a sparse table must be a number of dimensions");
01829                 error = 1;
01830                 x = 1;
01831             }
01832         }
01833         T->numind = x;
01834         T->mm = (MINMAX *)Malloc1(ABS(x)*sizeof(MINMAX),"table dimensions");
01835         T->flags = (WORD *)Malloc1(ABS(x)*sizeof(WORD),"table flags");
01836         mm = T->mm;
01837         inp = p;
01838         if ( *inp != ')' ) inp++;
01839         T->totind = 0;      /* At the moment there are this many */
01840         T->tablepointers = 0;
01841         T->reserved = 0;
01842     }
01843     else {
01844         T->numind = 0;
01845         T->totind = 1;
01846         for(;;) { /* Read the dimensions as far as they can be recognized */
01847             inp = ++p;
01848             if ( FG.cTable[*p] != 1 && *p != '+' && *p != '-' ) break;
01849             ParseSignedNumber(x,p)
01850             if ( FG.cTable[p[-1]] != 1 || *p != ':' ) break;
01851             p++;
01852             ParseSignedNumber(y,p)
01853             if ( FG.cTable[p[-1]] != 1 || ( *p != ',' && *p != ')' ) ) {
01854                 MesPrint("&Illegal dimension field in table declaration");
01855                 return(1);
01856             }

```

```

01857         mml = (MINMAX *)Malloc1((T->numind+1)*sizeof(MINMAX),"table dimensions");
01858         flags1 = (WORD *)Malloc1((T->numind+1)*sizeof(WORD),"table flags");
01859         for ( i = 0; i < T->numind; i++ ) { mml[i] = T->mm[i]; flags1[i] = T->flags[i]; }
01860         if ( T->mm ) M_free(T->mm,"table dimensions");
01861         if ( T->flags ) M_free(T->flags,"table flags");
01862         T->mm = mml;
01863         T->flags = flags1;
01864         mm = T->mm + T->numind;
01865         mm->mini = x; mm->maxi = y;
01866         T->totind *= mm->maxi-mm->mini+1;
01867         T->numind++;
01868         if ( *p == ')' ) { inp = p; break; }
01869     }
01870     w = T->tablepointers
01871     = (WORD *)Malloc1(TABLEEXTENSION*sizeof(WORD)*(T->totind),"table pointers");
01872     i = T->totind;
01873     for ( i = TABLEEXTENSION*T->totind; i > 0; i-- ) *w++ = -1; /* means: undefined */
01874     for ( i = T->numind-1, x = 1; i >= 0; i-- ) {
01875         T->mm[i].size = x; /* Defines increment in this dimension */
01876         x *= T->mm[i].maxi - T->mm[i].mini + 1;
01877     }
01878 }
01879 /*
01880 Now we redo the 'function part' and send it to the compiler.
01881 The prototype has to be picked up properly.
01882 */
01883 AT.WorkPointer++; /* We need one extra word later */
01884 OldWork = AT.WorkPointer;
01885 oldcbufnum = AC.cbufnum;
01886 AC.cbufnum = T->bufnum;
01887 C = cbuf+AC.cbufnum;
01888 oldcpointer = C->Pointer - C->Buffer;
01889 oldnumlhs = C->numlhs;
01890 oldnumrhs = C->numrhs;
01891 AddLHS(AC.cbufnum);
01892 while ( s >= name ) *--inp = *s--;
01893 w = AT.WorkPointer;
01894 AC.ProtoType = w;
01895 *w++ = SUBEXPRESSION;
01896 *w++ = SUBEXPSIZE;
01897 *w++ = 0;
01898 *w++ = 1;
01899 *w++ = AC.cbufnum;
01900 FILLSUB(w)
01901 AC.WildC = w;
01902 AC.NwildC = 0;
01903 AT.WorkPointer = w + 4*AM.MaxWildcards;
01904 if ( ( ret = CompileAlgebra(inp,LHSIDE,AC.ProtoType) ) < 0 ) {
01905     error = 1; goto FinishUp;
01906 }
01907 if ( AC.NwildC && SortWild(w,AC.NwildC) ) error = 1;
01908 w += AC.NwildC;
01909 i = w-OldWork;
01910 OldWork[1] = i;
01911 /*
01912 Basically we have to pull this pattern through Generator in case
01913 there are functions inside functions, or parentheses.
01914 We have to temporarily disable the .tabl to avoid problems with
01915 TestSub.
01916 Essential: we need to start NewSort twice to avoid the PutOut routines.
01917 The ground pattern is sitting in C->numrhs, but it could be that it
01918 has subexpressions in it. Hence it has to be worked out as the lhs in
01919 id statements (in comexpr.c).
01920 */
01921 OldWork[2] = C->numrhs;
01922 *w++ = 1; *w++ = 1; *w++ = 3;
01923 OldWork[-1] = w-OldWork+1;
01924 AT.WorkPointer = w;
01925 ww = C->rhs[C->numrhs];
01926 for ( j = 0; j < *ww; j++ ) w[j] = ww[j];
01927 AT.WorkPointer = w+*w;
01928 if ( *ww == 0 || ww[*ww] != 0 ) {
01929     MesPrint("&Illegal table pattern definition");
01930     AC.lhdollarflag = 0;
01931     error = 1;
01932 }
01933 if ( error ) goto FinishUp;
01934
01935 if ( NewSort(BHEAD0) || NewSort(BHEAD0) ) { error = 1; goto FinishUp; }
01936 AN.RepPoint = AT.RepCount + 1;
01937 AC.lhdollarflag = 0; oldEside = AR.Eside; AR.Eside = LHSIDE;
01938 AR.Cnumlhs = C->numlhs;
01939 functions[funnum].tabl = 0;
01940 if ( Generator(BHEAD w,C->numlhs) ) {
01941     functions[funnum].tabl = T;
01942     AR.Eside = oldEside;
01943     LowerSortLevel(); LowerSortLevel(); goto FinishUp;

```

```

01944     }
01945     functions[funnum].tabl = T;
01946     AR.Eside = oldEside;
01947     AT.WorkPointer = w;
01948     if ( EndSort(BHEAD w,0) < 0 ) { LowerSortLevel(); goto FinishUp; }
01949     if ( *w == 0 || *(w+*w) != 0 ) {
01950         MesPrint("&Irregular pattern in table definition");
01951         error = 1;
01952         goto FinishUp;
01953     }
01954     LowerSortLevel();
01955     if ( AC.lhdollarflag ) {
01956         MesPrint("&Unexpanded dollar variables are not allowed in table definition");
01957         error = 1;
01958         goto FinishUp;
01959     }
01960     AT.WorkPointer = ww = w + *w;
01961     if ( ww[-1] != 3 || ww[-2] != 1 || ww[-3] != 1 ) {
01962         MesPrint("&Coefficient of pattern in table definition should be 1.");
01963         error = 1;
01964         goto FinishUp;
01965     }
01966     AC.DumNum = 0;
01967     /*
01968     Now we have to allocate space for prototype+pattern
01969     In the case of TFORM we need extra pointers, because each worker has its own
01970     */
01971     j = *w + ABS(T->numind)*2-3;
01972     #ifdef WITHPTHREADS
01973     { int n;
01974       T->prototypeSize = ((i+j)*sizeof(WORD)+2*sizeof(WORD *)) * AM.totalnumberofthreads;
01975       T->prototype = (WORD *)Malloca1(T->prototypeSize, "table prototype");
01976       T->pattern = T->prototype + AM.totalnumberofthreads;
01977       t = (WORD *) (T->pattern + AM.totalnumberofthreads);
01978       for ( n = 0; n < AM.totalnumberofthreads; n++ ) {
01979           T->prototype[n] = t;
01980           for ( k = 0; k < i; k++ ) *t++ = OldWork[k];
01981       }
01982       T->pattern[0] = t;
01983       j--; w++;
01984       w[1] += ABS(T->numind)*2;
01985       for ( k = 0; k < FUNHEAD; k++ ) *t++ = *w++;
01986       j -= FUNHEAD;
01987       for ( k = 0; k < ABS(T->numind); k++ ) { *t++ = -SNUMBER; *t++ = 0; j -= 2; }
01988       for ( k = 0; k < j; k++ ) *t++ = *w++;
01989       if ( sparseflag ) T->pattern[0][1] = t - T->pattern[0];
01990       k = t - T->pattern[0];
01991       for ( n = 1; n < AM.totalnumberofthreads; n++ ) {
01992           T->pattern[n] = t; tt = T->pattern[0];
01993           for ( i = 0; i < k; i++ ) *t++ = *tt++;
01994       }
01995     }
01996     #else
01997     T->prototypeSize = (i+j)*sizeof(WORD);
01998     T->prototype = (WORD *)Malloca1(T->prototypeSize, "table prototype");
01999     T->pattern = T->prototype + i;
02000     for ( k = 0; k < i; k++ ) T->prototype[k] = OldWork[k];
02001     t = T->pattern;
02002     j--; w++;
02003     w[1] += ABS(T->numind)*2;
02004     for ( k = 0; k < FUNHEAD; k++ ) *t++ = *w++;
02005     j -= FUNHEAD;
02006     for ( k = 0; k < ABS(T->numind); k++ ) { *t++ = -SNUMBER; *t++ = 0; j -= 2; }
02007     for ( k = 0; k < j; k++ ) *t++ = *w++;
02008     if ( sparseflag ) T->pattern[1] = t - T->pattern;
02009     #endif
02010     /*
02011     At this point we can pop the compilerbuffer.
02012     */
02013     C->Pointer = C->Buffer + oldcpointer;
02014     C->numrhs = oldnumrhs;
02015     C->numlhs = oldnumlhs;
02016     /*
02017     Now check whether wildcards get converted to dollars (for PARALLEL)
02018     We give a warning!
02019     */
02020     #ifdef WITHPTHREADS
02021     t = T->prototype[0];
02022     #else
02023     t = T->prototype;
02024     #endif
02025     tt = t + t[1]; t += SUBEXPSIZE;
02026     while ( t < tt ) {
02027         if ( *t == LOADDOLLAR ) {
02028             Warning("The use of $-variable assignments in tables disables parallel\
02029 execution for the whole program.");
02030             AM.hparallelflag |= NOPARALLEL_TBLDOLLAR;

```

```

02031         AC.mparallelfalg |= NOPARALLEL_TBLDOLLAR;
02032         AddPotModdollar(t[2]);
02033     }
02034     t += t[1];
02035 }
02036 FinishUp;;
02037 AT.WorkPointer = OldWork - 1;
02038 AC.cbufnum = oldcbufnum;
02039 FinishUp2;;
02040 if ( T->sparse ) ClearTableTree(T);
02041 if ( ( sparseflag & 2 ) != 0 ) {
02042     if ( T->spare == 0 ) { SpareTable(T); }
02043 }
02044 return(error);
02045 }
02046
02047 /*
02048 #] DoTable :
02049 #[ CoTable :
02050 */
02051
02052 int CoTable(UBYTE *s)
02053 {
02054     return(DoTable(s,2));
02055 }
02056
02057 /*
02058 #] CoTable :
02059 #[ CoNTable :
02060 */
02061
02062 int CoNTable(UBYTE *s)
02063 {
02064     return(DoTable(s,0));
02065 }
02066
02067 /*
02068 #] CoNTable :
02069 #[ CoCTable :
02070 */
02071
02072 int CoCTable(UBYTE *s)
02073 {
02074     return(DoTable(s,1));
02075 }
02076
02077 /*
02078 #] CoCTable :
02079 #[ EmptyTable :
02080 */
02081
02082 void EmptyTable(TABLES T)
02083 {
02084     int j;
02085     if ( T->sparse ) ClearTableTree(T);
02086     if ( T->boomlijst ) M_free(T->boomlijst, "TableTree");
02087     T->boomlijst = 0;
02088     for ( j = 0; j < T->buffersfill; j++ ) { /* was <= */
02089         finishcbuf(T->buffers[j]);
02090     }
02091     if ( T->buffers ) M_free(T->buffers, "Table buffers");
02092     finishcbuf(T->bufnum);
02093     T->bufnum = inicbufs();
02094     T->bufferssize = 8;
02095     T->buffers = (WORD *)Malloc1(sizeof(WORD)*T->bufferssize, "Table buffers");
02096     T->buffersfill = 0;
02097     T->buffers[T->buffersfill++] = T->bufnum;
02098     T->defined = T->mdefined = 0; T->flags = 0;
02099     T->numtree = 0; T->rootnum = 0; T->MaxTreeSize = 0;
02100     T->spare = 0; T->reserved = 0;
02101     if ( T->spare ) {
02102         TABLES TT = T->spare;
02103         if ( TT->mm ) M_free(TT->mm, "tableminmax");
02104         if ( TT->flags ) M_free(TT->flags, "tableflags");
02105         if ( TT->tablepointers ) M_free(TT->tablepointers, "tablepointers");
02106         for ( j = 0; j < TT->buffersfill; j++ ) {
02107             finishcbuf(TT->buffers[j]);
02108         }
02109         if ( TT->boomlijst ) M_free(TT->boomlijst, "TableTree");
02110         if ( TT->buffers ) M_free(TT->buffers, "Table buffers");
02111         M_free(TT, "table");
02112         SpareTable(T);
02113     }
02114     else {
02115         WORD *w = T->tablepointers;
02116         j = T->totind;
02117         for ( j = TABLEEXTENSION*T->totind; j > 0; j-- ) *w++ = -1; /* means: undefined */

```

```

02118     }
02119 }
02120
02121 /*
02122 #] EmptyTable :
02123 #[ AddSet :
02124 */
02125
02126 int AddSet(UBYTE *name, WORD dim)
02127 {
02128     int nodenum, numset = AC.SetList.num;
02129     SETS set = (SETS)FromVarList(&AC.SetList);
02130     UBYTE *s;
02131     if ( name ) {
02132         set->name = AddName(AC.varnames,name,CSET,numset,&nodenum);
02133         s = name;
02134         while ( *s ) s++;
02135         set->namesize = (s-name)+1;
02136         set->node = nodenum;
02137     }
02138     else {
02139         set->name = 0;
02140         set->namesize = 0;
02141         set->node = -1;
02142     }
02143     set->first =
02144     set->last = AC.SetElementList.num; /* set has no elements yet */
02145     set->type = -1; /* undefined as of yet */
02146     set->dimension = dim;
02147     set->flags = 0;
02148     return(numset);
02149 }
02150
02151 /*
02152 #] AddSet :
02153 #[ DoElements :
02154
02155 Remark (25-mar-2011): If the dimension has been set (dim != MAXPOSITIVE)
02156 we want to test dimensions. Numbers count as dimension zero?
02157 */
02158
02159 int DoElements(UBYTE *s, SETS set, UBYTE *name)
02160 {
02161     int type, error = 0, x, sgn, i;
02162     WORD numset, *e;
02163     UBYTE c, *cname;
02164     while ( *s ) {
02165         if ( *s == ',' ) { s++; continue; }
02166         sgn = 0;
02167         while ( *s == '-' || *s == '+' ) {
02168             if ( *s == '-' ) sgn ^= 1;
02169             s++;
02170         }
02171         cname = s;
02172         if ( FG.cTable[*s] == 0 || *s == '_' || *s == '[' ) {
02173             if ( ( s = SkipAName(s) ) == 0 ) {
02174                 MesPrint("&Illegal name in set definition");
02175                 return(1);
02176             }
02177             c = *s; *s = 0;
02178             if ( ( ( type = GetName(AC.exprnames,cname,&numset,NOAUTO) ) == NAMENOTFOUND )
02179                 && ( ( type = GetOName(AC.varnames,cname,&numset,WITHAUTO) ) == NAMENOTFOUND ) ) {
02180                 DUBIOUSV dv;
02181                 int nodenum;
02182                 MesPrint("&%s has not been declared",cname);
02183             }
02184             /*
02185             We enter a 'dubious' declaration to cut down on errors
02186
02187             numset = AC.DubiousList.num;
02188             dv = (DUBIOUSV)FromVarList(&AC.DubiousList);
02189             dv->name = AddName(AC.varnames,cname,CDUBIOUS,numset,&nodenum);
02190             dv->node = nodenum;
02191             set->type = type = CDUBIOUS;
02192             set->dimension = 0;
02193             error = 1;
02194         }
02195         if ( set->type == -1 ) {
02196             if ( type == CSYMBOL ) {
02197                 for ( i = set->first; i < set->last; i++ ) {
02198                     SetElements[i] += 2*MAXPOWER;
02199                 }
02200             }
02201             set->type = type;
02202         }
02203         if ( set->type != type && set->type != CDUBIOUS
02204             && type != CDUBIOUS ) {
02205             if ( set->type != CNUMBER || ( type != CSYMBOL

```

```

02205         && type != CINDEX ) ) {
02206             MesPrint(
02207                 "%s has not the same type as the other members of the set"
02208                 ,cname);
02209             error = 1;
02210             set->type = CDUBIOUS;
02211         }
02212     else {
02213         if ( type == CSYMBOL ) {
02214             for ( i = set->first; i < set->last; i++ ) {
02215                 SetElements[i] += 2*MAXPOWER;
02216             }
02217         }
02218         set->type = type;
02219     }
02220 }
02221 if ( set->dimension != MAXPOSITIVE ) { /* Dimension check */
02222     switch ( set->type ) {
02223     case CSYMBOL:
02224         if ( symbols[numset].dimension != set->dimension ) {
02225             MesPrint("&Dimension check failed in set %s, symbol %s",
02226                 VARNAME(Sets,(set-Sets)),
02227                 VARNAME(symbols,numset));
02228             error = 1;
02229             set->dimension = MAXPOSITIVE;
02230         }
02231         break;
02232     case CVECTOR:
02233         if ( vectors[numset-AM.OffsetVector].dimension != set->dimension ) {
02234             MesPrint("&Dimension check failed in set %s, vector %s",
02235                 VARNAME(Sets,(set-Sets)),
02236                 VARNAME(vectors,(numset-AM.OffsetVector)));
02237             error = 1;
02238             set->dimension = MAXPOSITIVE;
02239         }
02240         break;
02241     case CFUNCTION:
02242         if ( functions[numset-FUNCTION].dimension != set->dimension ) {
02243             MesPrint("&Dimension check failed in set %s, function %s",
02244                 VARNAME(Sets,(set-Sets)),
02245                 VARNAME(functions,(numset-FUNCTION)));
02246             error = 1;
02247         }
02248         break;
02249         set->dimension = MAXPOSITIVE;
02250     }
02251 }
02252 if ( sgn ) {
02253     if ( type != CVECTOR ) {
02254         MesPrint("&Illegal use of - sign in set. Can use only with vector or number");
02255         error = 1;
02256     }
02257 }
02258 numset = AM.OffsetVector - numset;
02259 numset |= SPECMASK;
02260 numset = AM.OffsetVector - numset;
02261 */
02262 numset -= WILDMASK;
02263 }
02264 *s = c;
02265 if ( name == 0 && *s == '?' ) {
02266     s++;
02267     switch ( set->type ) {
02268     case CSYMBOL:
02269         numset = -numset; break;
02270     case CVECTOR:
02271         numset += WILDOFFSET; break;
02272     case CINDEX:
02273         numset |= WILDMASK; break;
02274     case CFUNCTION:
02275         numset |= WILDMASK; break;
02276     }
02277     AC.wildflag = 1;
02278 }
02279 /*
02280 Now add the element to the set.
02281 */
02282 e = (WORD *)FromVarList(&AC.SetElementList);
02283 *e = numset;
02284 (set->last)++;
02285 }
02286 else if ( FG.cTable[*s] == 1 ) {
02287     ParseNumber(x,s)
02288     if ( sgn ) x = -x;
02289     if ( x >= MAXPOWER || x <= -MAXPOWER ||
02290         ( set->type == CINDEX && ( x < 0 || x >= AM.OffsetIndex ) ) ) {
02291         MesPrint("&Illegal value for set element: %d",x);

```



```

02292         if ( AC.firstconstindex ) {
02293             MesPrint("&0 <= Fixed indices < ConstIndex(which is %d)",
02294                 AM.OffsetIndex-1);
02295             MesPrint("&For setting ConstIndex, read the chapter on the setup file");
02296             AC.firstconstindex = 0;
02297         }
02298         error = 1;
02299         x = 0;
02300     }
02301 /*
02302     Check what is allowed with the type.
02303 */
02304     if ( set->type == -1 ) {
02305         if ( x < 0 || x >= AM.OffsetIndex ) {
02306             for ( i = set->first; i < set->last; i++ ) {
02307                 SetElements[i] += 2*MAXPOWER;
02308             }
02309             set->type = CSYMBOL;
02310         }
02311         else set->type = CNUMBER;
02312     }
02313     else if ( set->type == CDUBIOUS ) {}
02314     else if ( set->type == CNUMBER && x < 0 ) {
02315         for ( i = set->first; i < set->last; i++ ) {
02316             SetElements[i] += 2*MAXPOWER;
02317         }
02318         set->type = CSYMBOL;
02319     }
02320     else if ( set->type != CSYMBOL && ( x < 0 ||
02321         ( set->type != CINDEX && set->type != CNUMBER ) ) ) {
02322         MesPrint("&Illegal mixture of element types in set");
02323         error = 1;
02324         set->type = CDUBIOUS;
02325     }
02326 /*
02327     Allocate an element
02328 */
02329     e = (WORD *)FromVarList(&AC.SetElementList);
02330     (set->last)++;
02331     if ( set->type == CSYMBOL ) *e = x + 2*MAXPOWER;
02332 /*
02333     else if ( set->type == CINDEX ) *e = x; */
02334     else *e = x;
02335 }
02336 else {
02337     MesPrint("&Illegal object in list of set elements");
02338     return(1);
02339 }
02340 if ( error == 0 && ( ( set->flags & ORDEREDSET ) == ORDEREDSET ) ) {
02341 /*
02342     The set->last-set->first list of numbers must be sorted.
02343     Because we plan here potentially thousands of elements we use
02344     a simple version of splitmerge. In ordered sets we can search
02345     later with a binary search.
02346 */
02347     SimpleSplitMerge(SetElements+set->first,set->last-set->first);
02348 }
02349 return(error);
02350 }
02351
02352 /*
02353     #] DoElements :
02354     #[ CoSet :
02355
02356     Set declarations.
02357 */
02358
02359 int CoSet(UBYTE *s)
02360 {
02361     int type, error = 0, ordered = 0;
02362     UBYTE *name = s, c, *ss;
02363     SETS set;
02364     WORD numberofset, dim = MAXPOSITIVE;
02365 #ifdef WITHFLOAT
02366 /*-----*/
02367     {
02368         WORD numeq = 0;
02369         LONG x;
02370         ss = s;
02371         while ( *ss && *ss != ':' ) { if ( *ss == '=' ) numeq++; ss++; }
02372         if ( *ss == 0 && numeq == 1 ) { /* We have the Set var = value; variety */
02373             while ( FG.cTable[*s] == 0 ) s++;
02374             ss = s; c = *s; *s = 0;
02375             if ( c != '=' ) {
02376 Proper:
02377                 MesPrint("&Proper syntax for value-set is `Set name = value'");
02378                 return(1);

```

```

02379         }
02380         x = 0; s++;
02381         while ( *s >= '0' && *s <= '9' ) x = 10*x + (*s++-'0');
02382         if ( *s ) goto Proper;
02383         if ( StrICmp(name, (UBYTE *) "maxweight") == 0 ) {
02384             AC.tMaxWeight = x; /* Temporary. Made permanent later */
02385         }
02386         else if ( StrICmp(name, (UBYTE *) "defaultprecision") == 0 ) {
02387             AC.tDefaultPrecision = x; /* Temporary. Made permanent later */
02388         }
02389         else {
02390             MesPrint("&Illegal subkey in value set: %s", name);
02391             return(1);
02392         }
02393     }
02394 }
02395 /*-----*/
02396 #endif
02397 if ( ( s = SkipAName(s) ) == 0 ) {
02398     IllForm: MesPrint("&Illegal name for set");
02399     return(1);
02400 }
02401 c = *s; *s = 0;
02402 if ( TestName(name) ) goto IllForm;
02403 if ( ( ( type = GetName(AC.exprnames, name, &numberofset, NOAUTO) ) != NAMENOTFOUND )
02404 || ( ( type = GetName(AC.varnames, name, &numberofset, NOAUTO) ) != NAMENOTFOUND ) ) {
02405     if ( type != CSET ) NameConflict(type, name);
02406     else {
02407         MesPrint("&There is already a set with the name %s", name);
02408     }
02409     return(1);
02410 }
02411 if ( c == 0 ) {
02412     numberofset = AddSet(name, 0);
02413     set = Sets + numberofset;
02414     return(0); /* empty set */
02415 }
02416 *s = c; ss = s; /* ss marks the end of the name */
02417 if ( *s == '(' ) {
02418     UBYTE *sss, cc;
02419     s++; sss = s; /* Beginning of option */
02420     while ( *s != ',' && *s != ')' && *s ) s++;
02421     cc = *s; *s = 0;
02422     if ( StrICont(sss, (UBYTE *) "ordered") == 0 ) {
02423         ordered = ORDEREDSET;
02424     }
02425     else {
02426         MesPrint("&Error: Illegal option in set definition: %s", sss);
02427         error = 1;
02428     }
02429     *s = cc;
02430     if ( *s != ')' ) {
02431         MesPrint("&Error: Currently only one option allowed in set definition.");
02432         error = 1;
02433         while ( *s && *s != ')' ) s++;
02434     }
02435     s++;
02436 }
02437 if ( *s == '(' ) {
02438     s++;
02439     if ( ( *s == 'd' || *s == 'D' ) && s[1] == '=' ) {
02440         s += 2;
02441         if ( *s == '-' || *s == '+' || FG.cTable[*s] == 1 ) {
02442             ParseSignedNumber(dim, s)
02443             if ( dim < -HALFMAX || dim > HALFMAX ) {
02444                 MesPrint("&Warning: dimension of %s (%d) out of range",
02445                     name, dim);
02446             }
02447         }
02448         if ( *s != ')' ) goto IllDim;
02449         else s++;
02450     }
02451     else {
02452         IllDim: MesPrint("&Error: Illegal dimension field for set %s", name);
02453         error = 1;
02454         s = SkipField(s, 0);
02455     }
02456     while ( *s == ',' ) s++;
02457 }
02458 c = *ss; *ss = 0;
02459 numberofset = AddSet(name, dim);
02460 *ss = c;
02461 set = Sets + numberofset;
02462 set->flags |= ordered;
02463 if ( *s != ':' ) {
02464     MesPrint("&Proper syntax is `Set name:elements'");
02465     return(1);

```

```

02466     }
02467     s++;
02468     error = DoElements(s, set, name);
02469     AC.SetList.numtemp = AC.SetList.num;
02470     AC.SetElementList.numtemp = AC.SetElementList.num;
02471     return(error);
02472 }
02473
02474 /*
02475  #] CoSet :
02476  #[ DoTempSet :
02477
02478      Gets a {} set definition and returns a set number if the set is
02479      properly structured. This number refers either to an already
02480      existing set, or to a set that is defined here.
02481      From and to refer to the contents. They exclude the {}.
02482  */
02483
02484 int DoTempSet(UBYTE *from, UBYTE *to)
02485 {
02486     int i, num, j, sgn;
02487     WORD *e, *ep;
02488     UBYTE c;
02489     int setnum = AddSet(0, MAXPOSITIVE);
02490     SETS set = Sets + setnum, setp;
02491     set->name = -1;
02492     set->type = -1;
02493     c = *to; *to = 0;
02494     AC.wildflag = 0;
02495     while ( *from == ',' ) from++;
02496     if ( *from == '<' || *from == '>' ) {
02497         set->type = CRANGE;
02498         set->first = 3*MAXPOWER;
02499         set->last = -3*MAXPOWER;
02500         while ( *from == '<' || *from == '>' ) {
02501             if ( *from == '<' ) {
02502                 j = 1; from++;
02503                 if ( *from == '=' ) { from++; j++; }
02504             }
02505             else {
02506                 j = -1; from++;
02507                 if ( *from == '=' ) { from++; j--; }
02508             }
02509             sgn = 1;
02510             while ( *from == '-' || *from == '+' ) {
02511                 if ( *from == '-' ) sgn = -sgn;
02512                 from++;
02513             }
02514             ParseNumber(num, from)
02515             if ( *from && *from != ',' ) {
02516                 MesPrint("&Illegal number in ranged set definition");
02517                 return(-1);
02518             }
02519             if ( sgn < 0 ) num = -num;
02520             if ( num >= MAXPOWER || num <= -MAXPOWER ) {
02521                 Warning("Value in ranged set too big. Adjusted to infinity.");
02522                 if ( num > 0 ) num = 3*MAXPOWER;
02523                 else num = -3*MAXPOWER;
02524             }
02525             else if ( j == 2 ) num += 2*MAXPOWER;
02526             else if ( j == -2 ) num -= 2*MAXPOWER;
02527             if ( j > 0 ) set->first = num;
02528             else set->last = num;
02529             while ( *from == ',' ) from++;
02530         }
02531         if ( *from ) {
02532             MesPrint("&Definition of ranged set contains illegal objects");
02533             return(-1);
02534         }
02535     }
02536     else if ( DoElements(from, set, (UBYTE *)0) != 0 ) {
02537         AC.SetElementList.num = set->first;
02538         AC.SetList.num--; *to = c;
02539         return(-1);
02540     }
02541     *to = c;
02542 }
02543 /*
02544  Now we have to test whether this set exists already.
02545  */
02546 num = set->last - set->first;
02547 for ( setp = Sets, i = 0; i < AC.SetList.num-1; i++, setp++ ) {
02548     if ( num != setp->last - setp->first ) continue;
02549     if ( set->type != setp->type ) continue;
02550     if ( set->type == CRANGE ) {
02551         if ( set->first == setp->first ) return(setp-Sets);
02552     }
    else {

```

```

02553         e = SetElements + set->first;
02554         ep = SetElements + setp->first;
02555         j = num;
02556         while ( --j >= 0 ) if ( *e++ != *ep++ ) break;
02557         if ( j < 0 ) {
02558             AC.SetElementList.num = set->first;
02559             AC.SetList.num--;
02560             return(setp - Sets);
02561         }
02562     }
02563 }
02564 return(setnum);
02565 }
02566
02567 /*
02568 #] DoTempSet :
02569 #[ CoAuto :
02570
02571 To prepare first:
02572     Use of the proper pointers in the various declaration routines
02573     Proper action in .store and .clear
02574 */
02575
02576 int CoAuto(UBYTE *inp)
02577 {
02578     int retval;
02579
02580     AC.Symbols = &(AC.AutoSymbolList);
02581     AC.Vectors = &(AC.AutoVectorList);
02582     AC.Indices = &(AC.AutoIndexList);
02583     AC.Functions = &(AC.AutoFunctionList);
02584     AC.activenames = &(AC.autonames);
02585     AC.AutoDeclareFlag = WITHAUTO;
02586
02587     while ( *inp == ',' ) inp++;
02588     retval = CompileStatement(inp);
02589
02590     AC.AutoDeclareFlag = 0;
02591     AC.Symbols = &(AC.SymbolList);
02592     AC.Vectors = &(AC.VectorList);
02593     AC.Indices = &(AC.IndexList);
02594     AC.Functions = &(AC.FunctionList);
02595     AC.activenames = &(AC.varnames);
02596     return(retval);
02597 }
02598
02599 /*
02600 #] CoAuto :
02601 #[ AddDollar :
02602
02603 The actual addition. Special routine for additions 'on the fly'
02604 */
02605
02606 int AddDollar(UBYTE *name, WORD type, WORD *start, LONG size)
02607 {
02608     int nodenum, numdollar = AP.DollarList.num;
02609     WORD *s, *t;
02610     DOLLARS dol = (DOLLARS)FromVarList(&AP.DollarList);
02611     dol->name = AddName(AC.dollarnames, name, CDOLLAR, numdollar, &nodenum);
02612     dol->type = type;
02613     dol->node = nodenum;
02614     dol->zero = 0;
02615     dol->numdummies = 0;
02616 #ifdef WITHPTHREADS
02617     dol->pthreadlockread = dummylock;
02618     dol->pthreadlockwrite = dummylock;
02619 #endif
02620     dol->nfactors = 0;
02621     dol->factors = 0;
02622     AddRHS(AM.dbufnum, 1);
02623     AddLHS(AM.dbufnum);
02624     if ( start && size > 0 ) {
02625         dol->size = size;
02626         dol->where =
02627             s = (WORD *)Malloc1((size+1)*sizeof(WORD), "$-variable contents");
02628         t = start;
02629         while ( --size >= 0 ) *s++ = *t++;
02630         *s = 0;
02631     }
02632     else { dol->where = &(AM.dollarzero); dol->size = 0; }
02633     cbuf[AM.dbufnum].rhs[numdollar] = dol->where;
02634     cbuf[AM.dbufnum].CanCommu[numdollar] = 0;
02635     cbuf[AM.dbufnum].NumTerms[numdollar] = 0;
02636
02637     return(numdollar);
02638 }
02639

```

```

02640 /*
02641  #] AddDollar :
02642  #[ ReplaceDollar :
02643
02644  Replacements of dollar variables can happen at any time.
02645  For debugging purposes we should have a tracing facility.
02646
02647  Not in use???
02648 */
02649
02650 int ReplaceDollar(WORD number, WORD newtype, WORD *newstart, LONG newsize)
02651 {
02652     int error = 0;
02653     DOLLARS dol = Dollars + number;
02654     WORD *s, *t;
02655     LONG i;
02656     dol->type = newtype;
02657     if ( dol->size == newsize && newsize > 0 && newstart ) {
02658         s = dol->where; t = newstart; i = newsize;
02659         while ( --i >= 0 ) { if ( *s++ != *t++ ) break; }
02660         if ( i < 0 ) return(0);
02661     }
02662     if ( dol->where && dol->where != &(dol->zero) ) {
02663         M_free(dol->where,"dollar->where"); dol->where = &(dol->zero); dol->size = 0;
02664     }
02665     if ( newstart && newsize > 0 ) {
02666         dol->size = newsize;
02667         dol->where =
02668         s = (WORD *)Malloc1((newsize+1)*sizeof(WORD),"$-variable contents");
02669         t = newstart; i = newsize;
02670         while ( --i >= 0 ) *s++ = *t++;
02671         *s = 0;
02672     }
02673     return(error);
02674 }
02675
02676 /*
02677  #] ReplaceDollar :
02678  #[ AddDubious :
02679
02680  This adds a variable of which we do not know the proper type.
02681 */
02682
02683 int AddDubious(UBYTE *name)
02684 {
02685     int nodenum, numdubious = AC.DubiousList.num;
02686     DUBIOUSV dub = (DUBIOUSV)FromVarList(&AC.DubiousList);
02687     dub->name = AddName(AC.varnames,name,CDUBIOUS,numdubious,&nodenum);
02688     dub->node = nodenum;
02689     return(numdubious);
02690 }
02691
02692 /*
02693  #] AddDubious :
02694  #[ MakeDubious :
02695 */
02696
02697 int MakeDubious(NAMETREE *nametree, UBYTE *name, WORD *number)
02698 {
02699     NAMENODE *n;
02700     int node, newnode, i;
02701     if ( nametree->namenode == 0 ) return(-1);
02702     newnode = nametree->headnode;
02703     do {
02704         node = newnode;
02705         n = nametree->namenode+node;
02706         if ( ( i = StrCmp(name,nametree->namebuffer+n->name) ) < 0 )
02707             newnode = n->left;
02708         else if ( i > 0 ) newnode = n->right;
02709         else {
02710             if ( n->type != CDUBIOUS ) {
02711                 int numdubious = AC.DubiousList.num;
02712                 FUNCTIONS dub = (FUNCTIONS)FromVarList(&AC.DubiousList);
02713                 dub->name = n->name;
02714                 n->number = numdubious;
02715             }
02716             *number = n->number;
02717             return(CDUBIOUS);
02718         }
02719     } while ( newnode >= 0 );
02720     return(-1);
02721 }
02722
02723 /*
02724  #] MakeDubious :
02725  #[ NameConflict :
02726 */

```

```

02727
02728 static char *nametype[] = { "symbol", "index", "vector", "function",
02729     "set", "expression" };
02730 static char *plural[] = { "", "n", "", "", "", "n" };
02731
02732 int NameConflict(int type, UBYTE *name)
02733 {
02734     if ( type == NAMENOTFOUND ) {
02735         MesPrint("%s has not been declared",name);
02736     }
02737     else if ( type != CDUBIOUS )
02738         MesPrint("%s has been declared as a%s %s already"
02739             ,name,plural[type],nametype[type]);
02740     return(1);
02741 }
02742
02743 /*
02744 #] NameConflict :
02745 #[ AddExpression :
02746 */
02747
02748 int AddExpression(UBYTE *name, int x, int y)
02749 {
02750     int nodenum, numexpr = AC.ExpressionList.num;
02751     EXPRESSIONS expr = (EXPRESSIONS)FromVarList(&AC.ExpressionList);
02752     UBYTE *s;
02753     expr->status = x;
02754     expr->printflag = y;
02755     PUTZERO(expr->onfile);
02756     PUTZERO(expr->size);
02757     expr->renum = 0;
02758     expr->renumlists = 0;
02759     expr->hidelevel = 0;
02760     expr->inmem = 0;
02761     expr->bracketinfo = expr->newbracketinfo = 0;
02762     if ( name ) {
02763         expr->name = AddName(AC.exprnames,name,CEXPRESSION,numexpr,&nodenum);
02764         expr->node = nodenum;
02765         expr->replace = NEWLYDEFINEDEXPRESSION ;
02766         s = name;
02767         while ( *s ) s++;
02768         expr->namesize = (s-name)+1;
02769     }
02770     else {
02771         expr->replace = REDEFINEDEXPRESSION;
02772         expr->name = AC.TransEname;
02773         expr->node = -1;
02774         expr->namesize = 0;
02775     }
02776     expr->vflags = 0;
02777     expr->numdummies = 0;
02778     expr->numfactors = 0;
02779     #ifdef PARALLELCODE
02780     expr->partodo = 0;
02781     #endif
02782     expr->uflags = 0;
02783     return(numexpr);
02784 }
02785
02786 /*
02787 #] AddExpression :
02788 #[ GetLabel :
02789 */
02790
02791 int GetLabel(UBYTE *name)
02792 {
02793     int i;
02794     LONG newnum;
02795     UBYTE **NewLabelNames;
02796     int *NewLabel;
02797     for ( i = 0; i < AC.NumLabels; i++ ) {
02798         if ( StrCmp(name,AC.LabelNames[i]) == 0 ) return(i);
02799     }
02800     if ( AC.NumLabels >= AC.MaxLabels ) {
02801         newnum = 2*AC.MaxLabels;
02802         if ( newnum == 0 ) newnum = 10;
02803         if ( newnum > 32765 ) newnum = 32765;
02804         if ( newnum == AC.MaxLabels ) {
02805             MesPrint("&More than 32765 labels in one module. Please simplify.");
02806             Terminate(-1);
02807         }
02808         NewLabelNames = (UBYTE **)Malloc1((sizeof(UBYTE *)+sizeof(int))
02809             *newnum,"Labels");
02810         NewLabel = (int *) (NewLabelNames+newnum);
02811         for ( i = 0; i < AC.MaxLabels; i++ ) {
02812             NewLabelNames[i] = AC.LabelNames[i];
02813             NewLabel[i] = AC.Labels[i];

```

```

02814     }
02815     if ( AC.LabelNames ) M_free(AC.LabelNames,"Labels");
02816     AC.LabelNames = NewLabelNames;
02817     AC.Labels = NewLabel;
02818     AC.MaxLabels = newnum;
02819 }
02820 i = AC.NumLabels++;
02821 AC.LabelNames[i] = strDup1(name,"Labels");
02822 AC.Labels[i] = -1;
02823 return(i);
02824 }
02825
02826 /*
02827 #] GetLabel :
02828 #[ ResetVariables :
02829
02830 Resets the variables.
02831 par = 0 The list of temporary sets (after each .sort)
02832 par = 1 The list of local variables (after each .store)
02833 par = 2 All variables (after each .clear)
02834 */
02835
02836 void ResetVariables(int par)
02837 {
02838     int i, j;
02839     TABLES T;
02840     switch ( par ) {
02841     case 0 : /* Only the sets without a name */
02842         AC.SetList.num = AC.SetList.numtemp;
02843         AC.SetElementList.num = AC.SetElementList.numtemp;
02844         break;
02845     case 2 :
02846         for ( i = AC.SymbolList.numclear; i < AC.SymbolList.num; i++ )
02847             AC.varnames->namenode[symbols[i].node].type = CDELETE;
02848         AC.SymbolList.num = AC.SymbolList.numglobal = AC.SymbolList.numclear;
02849         for ( i = AC.VectorList.numclear; i < AC.VectorList.num; i++ )
02850             AC.varnames->namenode[vectors[i].node].type = CDELETE;
02851         AC.VectorList.num = AC.VectorList.numglobal = AC.VectorList.numclear;
02852         for ( i = AC.IndexList.numclear; i < AC.IndexList.num; i++ )
02853             AC.varnames->namenode[indices[i].node].type = CDELETE;
02854         AC.IndexList.num = AC.IndexList.numglobal = AC.IndexList.numclear;
02855         for ( i = AC.FunctionList.numclear; i < AC.FunctionList.num; i++ ) {
02856             AC.varnames->namenode[functions[i].node].type = CDELETE;
02857             if ( ( T = functions[i].tabl ) != 0 ) {
02858                 if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
02859                 if ( T->prototype ) M_free(T->prototype,"tableprototype");
02860                 if ( T->mm ) M_free(T->mm,"tableminmax");
02861                 if ( T->flags ) M_free(T->flags,"tableflags");
02862                 if ( T->argtail ) M_free(T->argtail,"table arguments");
02863                 if ( T->boomlijst ) M_free(T->boomlijst,"TableTree");
02864                 for ( j = 0; j < T->buffersfill; j++ ) { /* was <= */
02865                     finishcbuf(T->buffers[j]);
02866                 }
02867                 /*[07apr2004 mt]:*/ /*memory leak*/
02868                 if ( T->buffers ) M_free(T->buffers,"Table buffers");
02869                 /*:[07apr2004 mt]*/
02870                 finishcbuf(T->bufnum);
02871                 if ( T->spare ) {
02872                     TABLES TT = T->spare;
02873                     if ( TT->mm ) M_free(TT->mm,"tableminmax");
02874                     if ( TT->flags ) M_free(TT->flags,"tableflags");
02875                     if ( TT->tablepointers ) M_free(TT->tablepointers,"tablepointers");
02876                     for ( j = 0; j < TT->buffersfill; j++ ) { /* was <= */
02877                         finishcbuf(TT->buffers[j]);
02878                     }
02879                     if ( TT->boomlijst ) M_free(TT->boomlijst,"TableTree");
02880                     /*[07apr2004 mt]:*/ /*memory leak*/
02881                     if ( TT->buffers ) M_free(TT->buffers,"Table buffers");
02882                     /*:[07apr2004 mt]*/
02883                     M_free(TT,"table");
02884                 }
02885                 M_free(T,"table");
02886             }
02887         }
02888         AC.FunctionList.num = AC.FunctionList.numglobal = AC.FunctionList.numclear;
02889         for ( i = AC.SetList.numclear; i < AC.SetList.num; i++ ) {
02890             if ( Sets[i].node >= 0 )
02891                 AC.varnames->namenode[Sets[i].node].type = CDELETE;
02892         }
02893         AC.SetList.numtemp = AC.SetList.num = AC.SetList.numglobal = AC.SetList.numclear;
02894         for ( i = AC.DubiousList.numclear; i < AC.DubiousList.num; i++ )
02895             AC.varnames->namenode[Dubious[i].node].type = CDELETE;
02896         AC.DubiousList.num = AC.DubiousList.numglobal = AC.DubiousList.numclear;
02897         AC.SetElementList.numtemp = AC.SetElementList.num =
02898             AC.SetElementList.numglobal = AC.SetElementList.numclear;
02899         CompactifyTree(AC.varnames,VARNAMES);
02900         AC.varnames->namefill = AC.varnames->globalnamefill = AC.varnames->clearnamefill;

```

```

02901     AC.varnames->nodefill = AC.varnames->globalnodefill = AC.varnames->clearnodefill;
02902
02903     for ( i = AC.AutoSymbolList.numclear; i < AC.AutoSymbolList.num; i++ )
02904         AC.autonames->namenode[
02905             ((SYMBOLS) (AC.AutoSymbolList.lijst))[i].node].type = CDELETE;
02906     AC.AutoSymbolList.num = AC.AutoSymbolList.numglobal
02907         = AC.AutoSymbolList.numclear;
02908     for ( i = AC.AutoVectorList.numclear; i < AC.AutoVectorList.num; i++ )
02909         AC.autonames->namenode[
02910             ((VECTORS) (AC.AutoVectorList.lijst))[i].node].type = CDELETE;
02911     AC.AutoVectorList.num = AC.AutoVectorList.numglobal
02912         = AC.AutoVectorList.numclear;
02913     for ( i = AC.AutoIndexList.numclear; i < AC.AutoIndexList.num; i++ )
02914         AC.autonames->namenode[
02915             ((INDICES) (AC.AutoIndexList.lijst))[i].node].type = CDELETE;
02916     AC.AutoIndexList.num = AC.AutoIndexList.numglobal
02917         = AC.AutoIndexList.numclear;
02918     for ( i = AC.AutoFunctionList.numclear; i < AC.AutoFunctionList.num; i++ ) {
02919         AC.autonames->namenode[
02920             ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].node].type = CDELETE;
02921         if ( ( T = ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].tabl ) != 0 ) {
02922             if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
02923             if ( T->prototype ) M_free(T->prototype,"tableprototype");
02924             if ( T->mm ) M_free(T->mm,"tableminmax");
02925             if ( T->flags ) M_free(T->flags,"tableflags");
02926             if ( T->argtail ) M_free(T->argtail,"table arguments");
02927             if ( T->boomlijst ) M_free(T->boomlijst,"TableTree");
02928             for ( j = 0; j < T->buffersfill; j++ ) { /* was <= */
02929                 finishcbuf(T->buffers[j]);
02930             }
02931             if ( T->spare ) {
02932                 TABLES TT = T->spare;
02933                 if ( TT->mm ) M_free(TT->mm,"tableminmax");
02934                 if ( TT->flags ) M_free(TT->flags,"tableflags");
02935                 if ( TT->tablepointers ) M_free(TT->tablepointers,"tablepointers");
02936                 for ( j = 0; j < TT->buffersfill; j++ ) { /* was <= */
02937                     finishcbuf(TT->buffers[j]);
02938                 }
02939                 if ( TT->boomlijst ) M_free(TT->boomlijst,"TableTree");
02940                 M_free(TT,"table");
02941             }
02942             M_free(T,"table");
02943         }
02944     }
02945     AC.AutoFunctionList.num = AC.AutoFunctionList.numglobal
02946         = AC.AutoFunctionList.numclear;
02947     CompactifyTree(AC.autonames,AUTONAMES);
02948     AC.autonames->namefill = AC.autonames->globalnamefill
02949         = AC.autonames->clearnamefill;
02950     AC.autonames->nodefill = AC.autonames->globalnodefill
02951         = AC.autonames->clearnodefill;
02952     ReleaseTB();
02953     break;
02954 case 1 :
02955     for ( i = AC.SymbolList.numglobal; i < AC.SymbolList.num; i++ )
02956         AC.varnames->namenode[symbols[i].node].type = CDELETE;
02957     AC.SymbolList.num = AC.SymbolList.numglobal;
02958     for ( i = AC.VectorList.numglobal; i < AC.VectorList.num; i++ )
02959         AC.varnames->namenode[vectors[i].node].type = CDELETE;
02960     AC.VectorList.num = AC.VectorList.numglobal;
02961     for ( i = AC.IndexList.numglobal; i < AC.IndexList.num; i++ )
02962         AC.varnames->namenode[indices[i].node].type = CDELETE;
02963     AC.IndexList.num = AC.IndexList.numglobal;
02964     for ( i = AC.FunctionList.numglobal; i < AC.FunctionList.num; i++ ) {
02965         AC.varnames->namenode[functions[i].node].type = CDELETE;
02966         if ( ( T = functions[i].tabl ) != 0 ) {
02967             if ( T->tablepointers ) M_free(T->tablepointers,"tablepointers");
02968             if ( T->prototype ) M_free(T->prototype,"tableprototype");
02969             if ( T->mm ) M_free(T->mm,"tableminmax");
02970             if ( T->flags ) M_free(T->flags,"tableflags");
02971             if ( T->argtail ) M_free(T->argtail,"table arguments");
02972             if ( T->boomlijst ) M_free(T->boomlijst,"TableTree");
02973             for ( j = 0; j < T->buffersfill; j++ ) { /* was <= */
02974                 finishcbuf(T->buffers[j]);
02975             }
02976             /*[07apr2004 mt]:*/ /*memory leak*/
02977             if ( T->buffers ) M_free(T->buffers,"Table buffers");
02978             /*:[07apr2004 mt]*/
02979             finishcbuf(T->bufnum);
02980             if ( T->spare ) {
02981                 TABLES TT = T->spare;
02982                 if ( TT->mm ) M_free(TT->mm,"tableminmax");
02983                 if ( TT->flags ) M_free(TT->flags,"tableflags");
02984                 if ( TT->tablepointers ) M_free(TT->tablepointers,"tablepointers");
02985                 for ( j = 0; j < TT->buffersfill; j++ ) { /* was <= */
02986                     finishcbuf(TT->buffers[j]);
02987                 }

```



```

02988             if ( TT->boomlijst ) M_free(TT->boomlijst,"TableTree");
02989             /*[07apr2004 mt]:*/ /*memory leak*/
02990             if ( TT->buffers ) M_free(TT->buffers,"Table buffers");
02991             /*:[07apr2004 mt]*/
02992             M_free(TT,"table");
02993         }
02994         M_free(T,"table");
02995     }
02996 }
02997 #ifdef TABLECLEANUP
02998 {
02999     int j;
03000     WORD *tp;
03001     for ( i = 0; i < AC.FunctionList.numglobal; i++ ) {
03002         /*
03003             Now, if the table definition is from after the .global
03004             while the function is from before, there is a problem.
03005             This could be resolved by defining CTable (=Table), Ntable
03006             and do away with the previous function definition.
03007         */
03008         if ( ( T = functions[i].tabl ) != 0 ) {
03009             /*
03010                 First restore overwritten definitions.
03011             */
03012             if ( T->sparse ) {
03013                 T->totind = T->mdefined;
03014                 for ( j = 0, tp = T->tablepointers; j < T->totind; j++ ) {
03015                     tp += ABS(T->numind);
03016                     #if TABLEEXTENSION == 2
03017                         tp[0] = tp[1];
03018                     #else
03019                         tp[0] = tp[2];
03020                         tp[1] = tp[3];
03021                         tp[4] = tp[5];
03022                     #endif
03023                     tp += TABLEEXTENSION;
03024                 }
03025                 RedoTableTree(T,T->totind);
03026                 if ( T->sparse ) {
03027                     TABLES TT = T->sparse;
03028                     TT->totind = TT->mdefined;
03029                     for ( j = 0, tp = TT->tablepointers; j < TT->totind; j++ ) {
03030                         tp += ABS(TT->numind);
03031                         #if TABLEEXTENSION == 2
03032                             tp[0] = tp[1];
03033                         #else
03034                             tp[0] = tp[2];
03035                             tp[1] = tp[3];
03036                             tp[4] = tp[5];
03037                         #endif
03038                         tp += TABLEEXTENSION;
03039                     }
03040                     RedoTableTree(TT,TT->totind);
03041                     cbuf[TT->bufnum].numlhs = cbuf[TT->bufnum].mnumlhs;
03042                     cbuf[TT->bufnum].numrhs = cbuf[TT->bufnum].mnumrhs;
03043                 }
03044             }
03045             else {
03046                 for ( j = 0, tp = T->tablepointers; j < T->totind; j++ ) {
03047                     #if TABLEEXTENSION == 2
03048                         tp[0] = tp[1];
03049                     #else
03050                         tp[0] = tp[2];
03051                         tp[1] = tp[3];
03052                         tp[4] = tp[5];
03053                     #endif
03054                 }
03055                 T->defined = T->mdefined;
03056             }
03057             cbuf[T->bufnum].numlhs = cbuf[T->bufnum].mnumlhs;
03058             cbuf[T->bufnum].numrhs = cbuf[T->bufnum].mnumrhs;
03059         }
03060     }
03061 }
03062 #endif
03063 AC.FunctionList.num = AC.FunctionList.numglobal;
03064 for ( i = AC.SetList.numglobal; i < AC.SetList.num; i++ ) {
03065     if ( Sets[i].node >= 0 )
03066         AC.varnames->namenode[Sets[i].node].type = CDELETE;
03067 }
03068 AC.SetList.numtemp = AC.SetList.num = AC.SetList.numglobal;
03069 for ( i = AC.DubiousList.numglobal; i < AC.DubiousList.num; i++ )
03070     AC.varnames->namenode[Dubious[i].node].type = CDELETE;
03071 AC.DubiousList.num = AC.DubiousList.numglobal;
03072 AC.SetElementList.numtemp = AC.SetElementList.num =
03073     AC.SetElementList.numglobal;
03074 CompactifyTree(AC.varnames,VARNAMES);

```

```

03075     AC.varnames->namefill = AC.varnames->globalnamefill;
03076     AC.varnames->nodefill = AC.varnames->globalnodefill;
03077
03078     for ( i = AC.AutoSymbolList.numglobal; i < AC.AutoSymbolList.num; i++ )
03079         AC.autonames->namenode[
03080             ((SYMBOLS) (AC.AutoSymbolList.lijst))[i].node].type = CDELETE;
03081     AC.AutoSymbolList.num = AC.AutoSymbolList.numglobal;
03082     for ( i = AC.AutoVectorList.numglobal; i < AC.AutoVectorList.num; i++ )
03083         AC.autonames->namenode[
03084             ((VECTORS) (AC.AutoVectorList.lijst))[i].node].type = CDELETE;
03085     AC.AutoVectorList.num = AC.AutoVectorList.numglobal;
03086     for ( i = AC.AutoIndexList.numglobal; i < AC.AutoIndexList.num; i++ )
03087         AC.autonames->namenode[
03088             ((INDICES) (AC.AutoIndexList.lijst))[i].node].type = CDELETE;
03089     AC.AutoIndexList.num = AC.AutoIndexList.numglobal;
03090     for ( i = AC.AutoFunctionList.numglobal; i < AC.AutoFunctionList.num; i++ ) {
03091         AC.autonames->namenode[
03092             ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].node].type = CDELETE;
03093         if ( ( T = ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].tabl ) != 0 ) {
03094             if ( T->tablepointers ) M_free(T->tablepointers, "tablepointers");
03095             if ( T->prototype ) M_free(T->prototype, "tableprototype");
03096             if ( T->mm ) M_free(T->mm, "tableminmax");
03097             if ( T->flags ) M_free(T->flags, "tableflags");
03098             if ( T->argtail ) M_free(T->argtail, "table arguments");
03099             if ( T->boomlijst ) M_free(T->boomlijst, "TableTree");
03100             for ( j = 0; j < T->buffersfill; j++ ) { /* was <= */
03101                 finishcbuf(T->buffers[j]);
03102             }
03103             if ( T->spare ) {
03104                 TABLES TT = T->spare;
03105                 if ( TT->mm ) M_free(TT->mm, "tableminmax");
03106                 if ( TT->flags ) M_free(TT->flags, "tableflags");
03107                 if ( TT->tablepointers ) M_free(TT->tablepointers, "tablepointers");
03108                 for ( j = 0; j < TT->buffersfill; j++ ) { /* was <= */
03109                     finishcbuf(TT->buffers[j]);
03110                 }
03111                 if ( TT->boomlijst ) M_free(TT->boomlijst, "TableTree");
03112                 M_free(TT, "table");
03113             }
03114             M_free(T, "table");
03115         }
03116     }
03117     AC.AutoFunctionList.num = AC.AutoFunctionList.numglobal;
03118
03119     CompactifyTree(AC.autonames, AUTONAMES);
03120
03121     AC.autonames->namefill = AC.autonames->globalnamefill;
03122     AC.autonames->nodefill = AC.autonames->globalnodefill;
03123     break;
03124 }
03125 }
03126
03127 /*
03128 #] ResetVariables :
03129 #[ RemoveDollars :
03130 */
03131
03132 void RemoveDollars(void)
03133 {
03134     DOLLARS d;
03135     CBUF *C = cbuf + AM.dbufnum;
03136     int numdollar = AP.DollarList.num;
03137     if ( numdollar > 0 ) {
03138         while ( numdollar > AM.gcNumDollars ) {
03139             numdollar--;
03140             d = Dollars + numdollar;
03141             if ( d->where && d->where != &(d->zero) && d->where != &(AM.dollarzero) ) {
03142                 M_free(d->where, "dollar->where"); d->where = &(d->zero); d->size = 0;
03143             }
03144             AC.dollarnames->namenode[d->node].type = CDELETE;
03145         }
03146         AP.DollarList.num = AM.gcNumDollars;
03147         CompactifyTree(AC.dollarnames, DOLLARNAMES);
03148
03149         C->numrhs = C->mnumrhs;
03150         C->numlhs = C->mnumlhs;
03151     }
03152 }
03153
03154 /*
03155 #] RemoveDollars :
03156 #[ Globalize :
03157 */
03158
03159 void Globalize(int par)
03160 {
03161     int i, j;

```

```

03162     WORD *tp;
03163     if ( par == 1 ) {
03164         AC.SymbolList.numclear      = AC.SymbolList.num;
03165         AC.VectorList.numclear      = AC.VectorList.num;
03166         AC.IndexList.numclear       = AC.IndexList.num;
03167         AC.FunctionList.numclear    = AC.FunctionList.num;
03168         AC.SetList.numclear         = AC.SetList.num;
03169         AC.DubiousList.numclear     = AC.DubiousList.num;
03170         AC.SetElementList.numclear  = AC.SetElementList.num;
03171         AC.varnames->clearnamefill = AC.varnames->namefill;
03172         AC.varnames->clearnodefill = AC.varnames->nodefill;
03173
03174         AC.AutoSymbolList.numclear  = AC.AutoSymbolList.num;
03175         AC.AutoVectorList.numclear  = AC.AutoVectorList.num;
03176         AC.AutoIndexList.numclear   = AC.AutoIndexList.num;
03177         AC.AutoFunctionList.numclear = AC.AutoFunctionList.num;
03178         AC.autonames->clearnamefill = AC.autonames->namefill;
03179         AC.autonames->clearnodefill = AC.autonames->nodefill;
03180     }
03181     /* for ( i = AC.FunctionList.numglobal; i < AC.FunctionList.num; i++ ) { */
03182     for ( i = MAXBUILTINFUNCTION-FUNCTION; i < AC.FunctionList.num; i++ ) {
03183         /*
03184             We need here not only the not-yet-global functions. The already
03185             global ones may have obtained extra elements.
03186         */
03187         if ( functions[i].tabl ) {
03188             TABLES T = functions[i].tabl;
03189             if ( T->sparse ) {
03190                 T->mdefined = T->totind;
03191                 for ( j = 0, tp = T->tablepointers; j < T->totind; j++ ) {
03192                     tp += ABS(T->numind);
03193                     #if TABLEEXTENSION == 2
03194                         tp[1] = tp[0];
03195                     #else
03196                         tp[2] = tp[0]; tp[3] = tp[1]; tp[5] = tp[4] & (~ELEMENTUSED);
03197                     #endif
03198                     tp += TABLEEXTENSION;
03199                 }
03200                 if ( T->spare ) {
03201                     TABLES TT = T->spare;
03202                     TT->mdefined = TT->totind;
03203                     for ( j = 0, tp = TT->tablepointers; j < TT->totind; j++ ) {
03204                         tp += ABS(TT->numind);
03205                         #if TABLEEXTENSION == 2
03206                             tp[1] = tp[0];
03207                         #else
03208                             tp[2] = tp[0]; tp[3] = tp[1]; tp[5] = tp[4] & (~ELEMENTUSED);
03209                         #endif
03210                         tp += TABLEEXTENSION;
03211                     }
03212                     cbuf[TT->bufnum].mnumlhs = cbuf[TT->bufnum].numlhs;
03213                     cbuf[TT->bufnum].mnumrhs = cbuf[TT->bufnum].numrhs;
03214                 }
03215             }
03216             else {
03217                 T->mdefined = T->defined;
03218                 for ( j = 0, tp = T->tablepointers; j < T->totind; j++ ) {
03219                     #if TABLEEXTENSION == 2
03220                         tp[1] = tp[0];
03221                     #else
03222                         tp[2] = tp[0]; tp[3] = tp[1]; tp[5] = tp[4] & (~ELEMENTUSED);
03223                     #endif
03224                 }
03225             }
03226             cbuf[T->bufnum].mnumlhs = cbuf[T->bufnum].numlhs;
03227             cbuf[T->bufnum].mnumrhs = cbuf[T->bufnum].numrhs;
03228         }
03229     }
03230     for ( i = AC.AutoFunctionList.numglobal; i < AC.AutoFunctionList.num; i++ ) {
03231         if ( ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].tabl )
03232             ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].tabl->mdefined =
03233             ((FUNCTIONS) (AC.AutoFunctionList.lijst))[i].tabl->defined;
03234     }
03235     AC.SymbolList.numglobal      = AC.SymbolList.num;
03236     AC.VectorList.numglobal      = AC.VectorList.num;
03237     AC.IndexList.numglobal       = AC.IndexList.num;
03238     AC.FunctionList.numglobal    = AC.FunctionList.num;
03239     AC.SetList.numglobal         = AC.SetList.num;
03240     AC.DubiousList.numglobal     = AC.DubiousList.num;
03241     AC.SetElementList.numglobal  = AC.SetElementList.num;
03242     AC.varnames->globalnamefill = AC.varnames->namefill;
03243     AC.varnames->globalnodefill = AC.varnames->nodefill;
03244
03245     AC.AutoSymbolList.numglobal  = AC.AutoSymbolList.num;
03246     AC.AutoVectorList.numglobal  = AC.AutoVectorList.num;
03247     AC.AutoIndexList.numglobal   = AC.AutoIndexList.num;
03248     AC.AutoFunctionList.numglobal = AC.AutoFunctionList.num;

```

```


03249     AC.autonames->globalnamefill = AC.autonames->namefill;
03250     AC.autonames->globalnodefill = AC.autonames->nodefill;
03251 }
03252
03253 /*
03254 #] Globalize :
03255 #[ TestName :
03256 */
03257
03258 int TestName(UBYTE *name)
03259 {
03260     if ( *name == '[' ) {
03261         while ( *name ) name++;
03262         if ( name[-1] == ']' ) return(0);
03263         return(-1);
03264     }
03265     while ( *name ) {
03266         if ( *name == '_' ) return(-1);
03267         name++;
03268     }
03269     return(0);
03270 }
03271
03272 /*
03273 #] TestName :
03274 */

```

4.89 normal.c File Reference

```
#include "form3.h"
```

Include dependency graph for normal.c:

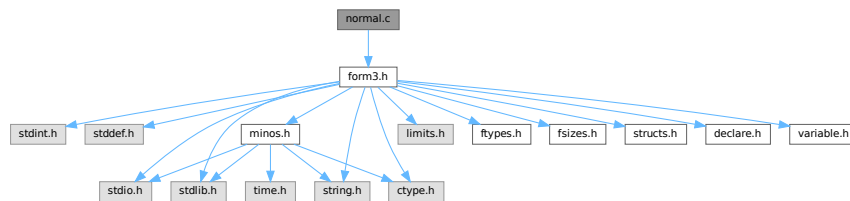

Macros

- `#define` [MAXNUMBEROFNONCOMTERMS](#) 2

Functions

- int [CompareFunctions](#) (WORD *left, WORD *fright)
- int [Commute](#) (WORD *left, WORD *fright)
- int [Normalize](#) (PHEAD WORD *term)
- int [ExtraSymbol](#) (WORD sym, WORD pow, WORD nsym, WORD *ppsym, WORD *ncoef)
- int [DoTheta](#) (PHEAD WORD *t)
- int [DoDelta](#) (WORD *t)
- void [DoRevert](#) (WORD *fun, WORD *tmp)
- WORD [DetCommu](#) (WORD *terms)
- WORD [DoesCommu](#) (WORD *term)
- int [TreatPolyRatFun](#) (PHEAD WORD *prf)
- void [DropCoefficient](#) (PHEAD WORD *term)
- void [DropSymbols](#) (PHEAD WORD *term)
- int [SymbolNormalize](#) (WORD *term)
- int [TestFunFlag](#) (PHEAD WORD *tfun)
- int [BracketNormalize](#) (PHEAD WORD *term)

4.89.1 Detailed Description

Mainly the routine Normalize. This routine brings terms to standard FORM. Currently it has one serious drawback. Its buffers are all in the stack. This means these buffers have a fixed size (NORMSIZE). In the past this has caused problems and NORMSIZE had to be increased.

It is not clear whether Normalize can be called recursively.

Definition in file [normal.c](#).

4.89.2 Macro Definition Documentation

4.89.2.1 MAXNUMBEROFNONCOMTERMS

```
#define MAXNUMBEROFNONCOMTERMS 2
```

Definition at line [4528](#) of file [normal.c](#).

4.89.3 Function Documentation

4.89.3.1 CompareFunctions()

```
int CompareFunctions (
    WORD * fleft,
    WORD * fright )
```

Definition at line [54](#) of file [normal.c](#).

4.89.3.2 Commute()

```
int Commute (
    WORD * fleft,
    WORD * fright )
```

Definition at line [118](#) of file [normal.c](#).

4.89.3.3 Normalize()

```
int Normalize (
    PHEAD WORD * term )
```

Definition at line [193](#) of file [normal.c](#).

4.89.3.4 ExtraSymbol()

```
int ExtraSymbol (
    WORD sym,
    WORD pow,
    WORD nsym,
    WORD * ppsym,
    WORD * ncoef )
```

Definition at line [4216](#) of file [normal.c](#).

4.89.3.5 DoTheta()

```
int DoTheta (
    PHEAD WORD * t )
```

Definition at line [4278](#) of file [normal.c](#).

4.89.3.6 DoDelta()

```
int DoDelta (
    WORD * t )
```

Definition at line [4375](#) of file [normal.c](#).

4.89.3.7 DoRevert()

```
void DoRevert (
    WORD * fun,
    WORD * tmp )
```

Definition at line [4442](#) of file [normal.c](#).

4.89.3.8 DetCommu()

```
WORD DetCommu (
    WORD * terms )
```

Definition at line [4530](#) of file [normal.c](#).

4.89.3.9 DoesCommu()

```
WORD DoesCommu (
    WORD * term )
```

Definition at line [4589](#) of file [normal.c](#).

4.89.3.10 TreatPolyRatFun()

```
int TreatPolyRatFun (
    PHEAD WORD * prf )
```

Definition at line [4980](#) of file [normal.c](#).

4.89.3.11 DropCoefficient()

```
void DropCoefficient (
    PHEAD WORD * term )
```

Definition at line [5116](#) of file [normal.c](#).

4.89.3.12 DropSymbols()

```
void DropSymbols (
    PHEAD WORD * term )
```

Definition at line [5134](#) of file [normal.c](#).

4.89.3.13 SymbolNormalize()

```
int SymbolNormalize (
    WORD * term )
```

Routine normalizes terms that contain only symbols. Regular minimum and maximum properties are ignored.

We check whether there are negative powers in the output. This is not allowed.

Definition at line [5164](#) of file [normal.c](#).

Referenced by [InFunction\(\)](#), and [poly_sort\(\)](#).

4.89.3.14 TestFunFlag()

```
int TestFunFlag (
    PHEAD WORD * tfun )
```

Definition at line [5260](#) of file [normal.c](#).

4.89.3.15 BracketNormalize()

```
int BracketNormalize (
    PHEAD WORD * term )
```

Definition at line [5291](#) of file [normal.c](#).

4.90 normal.c

[Go to the documentation of this file.](#)

```

00001
00010 /* #[] License : */
00011 /*
00012 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00013 *   When using this file you are requested to refer to the publication
00014 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00015 *   This is considered a matter of courtesy as the development was paid
00016 *   for by FOM the Dutch physics granting agency and we would like to
00017 *   be able to track its scientific use to convince FOM of its value
00018 *   for the community.
00019 *
00020 *   This file is part of FORM.
00021 *
00022 *   FORM is free software: you can redistribute it and/or modify it under the
00023 *   terms of the GNU General Public License as published by the Free Software
00024 *   Foundation, either version 3 of the License, or (at your option) any later
00025 *   version.
00026 *
00027 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00028 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00029 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00030 *   details.
00031 *
00032 *   You should have received a copy of the GNU General Public License along
00033 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00034 */
00035 /* #[] License : */
00036 /*
00037 *   #[] Includes : normal.c
00038 */
00039
00040 #include "form3.h"
00041 #ifdef WITHFLOAT
00042 #include <gmp.h>
00043
00044 int PackFloat(WORD *,mpf_t);
00045 int UnpackFloat(mpf_t, WORD *);
00046 void RatToFloat(mpf_t result, UWORD *format, int ratsize);
00047 #endif
00048 /*
00049 *   #[] Includes :
00050 *   #[] Normalize :
00051 *   #[] CompareFunctions :
00052 */
00053
00054 int CompareFunctions(WORD *fleft,WORD *fright)
00055 {
00056     WORD k, kk;
00057     if ( AC.properorderflag ) {
00058         if ( ( *fleft >= (FUNCTION+WILDOFFSET)
00059             && functions[*fleft-FUNCTION-WILDOFFSET].spec >= TENSORFUNCTION )
00060             || ( *fleft >= FUNCTION && *fleft < (FUNCTION + WILDOFFSET)
00061             && functions[*fleft-FUNCTION].spec >= TENSORFUNCTION ) ) {}
00062         else {
00063             WORD *s1, *s2, *ss1, *ss2;
00064             s1 = fleft+FUNHEAD; s2 = fright+FUNHEAD;
00065             ss1 = fleft + fleft[1]; ss2 = fright + fright[1];
00066             while ( s1 < ss1 && s2 < ss2 ) {
00067                 k = CompArg(s1,s2);
00068                 if ( k > 0 ) return(1);
00069                 if ( k < 0 ) return(0);
00070                 NEXTARG(s1)
00071                 NEXTARG(s2)
00072             }
00073             if ( s1 < ss1 ) return(1);
00074             return(0);
00075         }
00076         k = fleft[1] - FUNHEAD;
00077         kk = fright[1] - FUNHEAD;
00078         fleft += FUNHEAD;
00079         fright += FUNHEAD;
00080         while ( k > 0 && kk > 0 ) {
00081             if ( *fleft < *fright ) return(0);
00082             else if ( *fleft++ > *fright++ ) return(1);
00083             k--; kk--;
00084         }
00085         if ( k > 0 ) return(1);
00086         return(0);
00087     }
00088     else {
00089         k = fleft[1] - FUNHEAD;
00090         kk = fright[1] - FUNHEAD;

```



```

00091     fleft += FUNHEAD;
00092     fright += FUNHEAD;
00093     while ( k > 0 && kk > 0 ) {
00094         if ( *fleft < *fright ) return(0);
00095         else if ( *fleft++ > *fright++ ) return(1);
00096         k--; kk--;
00097     }
00098     if ( k > 0 ) return(1);
00099     return(0);
00100 }
00101 }
00102
00103 /*
00104     #] CompareFunctions :
00105     #[ Commute :
00106
00107     This function gets two adjacent function pointers and decides
00108     whether these two functions should be exchanged to obtain a
00109     natural ordering.
00110
00111     Currently there is only an ordering of gamma matrices belonging
00112     to different spin lines.
00113
00114     Note that we skip for now the cases of (F)^(3/2) or 1/F and a few more
00115     of such funny functions.
00116 */
00117
00118 int Commute(WORD *fleft, WORD *fright)
00119 {
00120     WORD fun1, fun2;
00121     if ( *fleft == DOLLAREXPRESSION || *fright == DOLLAREXPRESSION ) return(0);
00122     fun1 = ABS(*fleft); fun2 = ABS(*fright);
00123     if ( *fleft >= GAMMA && *fleft <= GAMMASEVEN
00124         && *fright >= GAMMA && *fright <= GAMMASEVEN ) {
00125         if ( fleft[FUNHEAD] < AM.OffsetIndex && fleft[FUNHEAD] > fright[FUNHEAD] )
00126             return(1);
00127         return(0);
00128     }
00129     if ( fun1 >= WILDOFFSET ) fun1 -= WILDOFFSET;
00130     if ( fun2 >= WILDOFFSET ) fun2 -= WILDOFFSET;
00131     if ( ( ( functions[fun1-FUNCTION].flags & COULDCOMMUTE ) == 0 )
00132         || ( ( functions[fun2-FUNCTION].flags & COULDCOMMUTE ) == 0 ) ) return(0);
00133 /*
00134     if other conditions will come here, keep in mind that if *fleft < 0
00135     or *fright < 0 they are arguments in the exponent function as in f^(3/2)
00136 */
00137     if ( AC.CommuteInSet == 0 ) return(0);
00138 /*
00139     The code for CompareFunctions can be stolen from the commuting case.
00140
00141     We need the syntax:
00142         Commute Fun1,Fun2,...,Fun'n';
00143     For this Fun1,...,Fun'n' need to be noncommuting functions.
00144     These functions will commute with all members of the group.
00145     In the AC.paircommute buffer the representation is
00146         'n'+1,element1,...,element'n', 'm'+1,element1,...,element'm',0
00147     A function can belong to more than one group.
00148     If a function commutes with itself, it is most efficient to make a separate
00149     group of two elements for it as in
00150         Commute T,T;    -> 3,T,T
00151 */
00152     if ( fun1 >= fun2 ) {
00153         WORD *group = AC.CommuteInSet, *g1, *g2, *g3;
00154         while ( *group > 0 ) {
00155             g3 = group + *group;
00156             g1 = group+1;
00157             while ( g1 < g3 ) {
00158                 if ( *g1 == fun1 || ( fun1 <= GAMMASEVEN && fun1 >= GAMMA
00159                     && *g1 <= GAMMASEVEN && *g1 >= GAMMA ) ) {
00160                     g2 = group+1;
00161                     while ( g2 < g3 ) {
00162                         if ( g1 != g2 && ( *g2 == fun2 ||
00163                             ( fun2 <= GAMMASEVEN && fun2 >= GAMMA
00164                             && *g2 <= GAMMASEVEN && *g2 >= GAMMA ) ) ) {
00165                             if ( fun1 != fun2 ) return(1);
00166                             if ( *fleft < 0 ) return(0);
00167                             if ( *fright < 0 ) return(1);
00168                             return(CompareFunctions(fleft,fright));
00169                         }
00170                         g2++;
00171                     }
00172                     break;
00173                 }
00174                 g1++;
00175             }
00176             group = g3;
00177         }

```

```

00178     }
00179     return(0);
00180 }
00181
00182 /*
00183     #] Commute :
00184     #[ Normalize :
00185
00186     This is the big normalization routine. It has a great need
00187     to be economical.
00188     There is a fixed limit to the number of objects coming in.
00189     Something should be done about it.
00190
00191 */
00192
00193 int Normalize(PHEAD WORD *term)
00194 {
00195     /*
00196         #[ Declarations :
00197     */
00198     GETBIDENTITY
00199     WORD *t, *m, *r, i, j, k, l, nsym, *ss, *tt, *u;
00200     WORD shortnum, stype;
00201     WORD *stop, *to = 0, *from = 0;
00202     /*
00203         The next variables could be better off in the AT.WorkSpace (?)
00204         Now they make stackallocations rather bothersome.
00205     */
00206     WORD psym[7*NORMSIZE], *ppsym;
00207     WORD pvec[NORMSIZE], *ppvec, nvec;
00208     WORD pdot[3*NORMSIZE], *ppdot, ndot;
00209     WORD pdel[2*NORMSIZE], *ppdel, ndel;
00210     WORD pind[NORMSIZE], nind;
00211     WORD *peps[NORMSIZE/3], neps;
00212     WORD *pden[NORMSIZE/3], nden;
00213     WORD *pcom[NORMSIZE], ncom;
00214     WORD *pnco[NORMSIZE], nnco;
00215     WORD *pcon[2*NORMSIZE], ncon; /* Pointer to contractable indices */
00216     WORD *n_coef, ncoef; /* Accumulator for the coefficient */
00217     WORD *n_llnum, *lnum, nnum;
00218     WORD *termout, oldtoprhs = 0, subtype;
00219     WORD ReplaceType, ReplaceVeto = 0, didcontr;
00220     int regval = 0;
00221     WORD *ReplaceSub;
00222     WORD *fillsetexp;
00223     CBUF *C = cbuf+AT.ebufnum;
00224     WORD *ANsc = 0, *ANsm = 0, *ANsr = 0, PolyFunMode;
00225     #ifdef WITHFLOAT
00226     WORD withfloat = 0;
00227     WORD *firstfloat = 0;
00228     #endif
00229     LONG oldcpointer = 0, x;
00230     n_coef = TermMalloc("NormCoef");
00231     n_llnum = TermMalloc("n_llnum");
00232     lnum = n_llnum+1;
00233     /*
00234         int termflag;
00235     */
00236     /*
00237         #] Declarations :
00238         #[ Setup :
00239     PrintTerm(term, "Normalize");
00240     */
00241
00242     Restart:
00243     didcontr = 0;
00244     ReplaceType = -1;
00245     t = term;
00246     if ( !*t ) { TermFree(n_coef, "NormCoef"); TermFree(n_llnum, "n_llnum"); return(regval); }
00247     r = t + *t;
00248     ncoef = r[-1];
00249     i = ABS(ncoef);
00250     r -= i;
00251     m = r;
00252     t = n_coef;
00253     NCOPY(t, r, i);
00254     termout = AT.WorkPointer;
00255     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
00256     fillsetexp = termout+1;
00257     AN.PolyNormFlag = 0; PolyFunMode = AN.PolyFunTodo;
00258     /*
00259         termflag = 0;
00260     */
00261     /*
00262         #] Setup :
00263         #[ First scan :
00264     */

```

```

00265     nsym = nvec = ndot = ndel = neps = nden =
00266     nind = ncom = nnco = ncon = 0;
00267     ppsym = psym;
00268     ppvec = pvec;
00269     ppdot = pdot;
00270     ppdel = pdel;
00271     t = term + 1;
00272     conscan:;
00273     if ( t < m ) do {
00274         r = t + t[1];
00275         switch ( *t ) {
00276             case SYMBOL :
00277                 t += 2;
00278                 from = m;
00279                 do {
00280                     if ( t[1] == 0 ) {
00281                         /* if ( *t == 0 || *t == MAXPOWER ) goto NormZZ; */
00282                         t += 2;
00283                         goto NextSymbol;
00284                     }
00285                     if ( *t <= DENOMINATORSYMBOL && *t >= COEFFSYMBOL ) {
00286                         /*
00287                             if ( AN.NoScrat2 == 0 ) {
00288                                 AN.NoScrat2 = (UWORD *)Malloc1((AM.MaxTal+2)*sizeof(UWORD), "Normalize");
00289                             }
00290                         */
00291                         if ( AN.cTerm ) m = AN.cTerm;
00292                         else m = term;
00293                         m += *m;
00294                         ncoef = REDLENG(ncoef);
00295                         if ( *t == COEFFSYMBOL ) {
00296                             i = t[1];
00297                             nnum = REDLENG(m[-1]);
00298                             m -= ABS(m[-1]);
00299                             if ( i > 0 ) {
00300                                 while ( i > 0 ) {
00301                                     if ( MulRat(BHEAD (UWORD *)n_coef, ncoef, (UWORD *)m, nnum,
00302                                         (UWORD *)n_coef, &ncoef) ) goto FromNorm;
00303                                     i--;
00304                                 }
00305                             }
00306                             else if ( i < 0 ) {
00307                                 while ( i < 0 ) {
00308                                     if ( DivRat(BHEAD (UWORD *)n_coef, ncoef, (UWORD *)m, nnum,
00309                                         (UWORD *)n_coef, &ncoef) ) goto FromNorm;
00310                                     i++;
00311                                 }
00312                             }
00313                         }
00314                         else {
00315                             i = m[-1];
00316                             nnum = (ABS(i)-1)/2;
00317                             if ( *t == NUMERATORSYMBOL ) { m -= nnum + 1; }
00318                             else { m--; }
00319                             while ( *m == 0 && nnum > 1 ) { m--; nnum--; }
00320                             m -= nnum;
00321                             if ( i < 0 && *t == NUMERATORSYMBOL ) nnum = -nnum;
00322                             i = t[1];
00323                             if ( i > 0 ) {
00324                                 while ( i > 0 ) {
00325                                     if ( Mully(BHEAD (UWORD *)n_coef, &ncoef, (UWORD *)m, nnum) )
00326                                         goto FromNorm;
00327                                     i--;
00328                                 }
00329                             }
00330                             else if ( i < 0 ) {
00331                                 while ( i < 0 ) {
00332                                     if ( Divvy(BHEAD (UWORD *)n_coef, &ncoef, (UWORD *)m, nnum) )
00333                                         goto FromNorm;
00334                                     i++;
00335                                 }
00336                             }
00337                         }
00338                         ncoef = INCLENG(ncoef);
00339                         t += 2;
00340                         goto NextSymbol;
00341                     }
00342                     else if ( *t == DIMENSIONSYMBOL ) {
00343                         if ( AN.cTerm ) m = AN.cTerm;
00344                         else m = term;
00345                         k = DimensionTerm(m);
00346                         if ( k == 0 ) goto NormZero;
00347                         if ( k == MAXPOSITIVE ) {
00348                             MLOCK(ErrorMessageLock);
00349                             MesPrint("Dimension_ is undefined in term %t");
00350                             MUNLOCK(ErrorMessageLock);
00351                             goto NormMin;

```

```

00352     }
00353     if ( k == -MAXPOSITIVE ) {
00354         MLOCK(ErrorMessageLock);
00355         MesPrint("Dimension_ out of range in term %t");
00356         MUNLOCK(ErrorMessageLock);
00357         goto NormMin;
00358     }
00359     if ( k > 0 ) { *((UWORD *)lnum) = k; nnum = 1; }
00360     else { *((UWORD *)lnum) = -k; nnum = -1; }
00361     ncoef = REDLENG(ncoef);
00362     if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) ) goto FromNorm;
00363     ncoef = INCLENG(ncoef);
00364     t += 2;
00365     goto NextSymbol;
00366 }
00367 if ( ( *t >= MAXPOWER && *t < 2*MAXPOWER )
00368     || ( *t < -MAXPOWER && *t > -2*MAXPOWER ) ) {
00369 /*
00370 #] TO SNUMBER :
00371 */
00372     if ( *t < 0 ) {
00373         *t += MAXPOWER;
00374         *t = -*t;
00375         if ( t[1] & 1 ) ncoef = -ncoef;
00376     }
00377     else if ( *t == MAXPOWER ) {
00378         if ( t[1] > 0 ) goto NormZero;
00379         goto NormInf;
00380     }
00381     else {
00382         *t -= MAXPOWER;
00383     }
00384     lnum[0] = *t;
00385     nnum = 1;
00386     if ( t[1] && RaisPow(BHEAD (UWORD *)lnum,&nnum, (UWORD) (ABS(t[1]))) )
00387         goto FromNorm;
00388     ncoef = REDLENG(ncoef);
00389     if ( t[1] < 0 ) {
00390         if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
00391             goto FromNorm;
00392     }
00393     else if ( t[1] > 0 ) {
00394         if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
00395             goto FromNorm;
00396     }
00397     ncoef = INCLENG(ncoef);
00398 /*
00399 #] TO SNUMBER :
00400 */
00401     t += 2;
00402     goto NextSymbol;
00403 }
00404 if ( ( *t <= NumSymbols && *t > -MAXPOWER )
00405     && ( symbols[*t].complex & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY ) {
00406     if ( t[1] <= 2*MAXPOWER && t[1] >= -2*MAXPOWER ) {
00407         t[1] %= symbols[*t].maxpower;
00408         if ( t[1] < 0 ) t[1] += symbols[*t].maxpower;
00409         if ( ( symbols[*t].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
00410             if ( ( ( symbols[*t].maxpower & 1 ) == 0 ) &&
00411                 ( t[1] >= symbols[*t].maxpower/2 ) ) {
00412                 t[1] -= symbols[*t].maxpower/2; ncoef = -ncoef;
00413             }
00414         }
00415         if ( t[1] == 0 ) { t += 2; goto NextSymbol; }
00416     }
00417 }
00418 i = nsym;
00419 m = ppsym;
00420 if ( i > 0 ) do {
00421     m -= 2;
00422     if ( *t == *m ) {
00423         t++; m++;
00424         if ( *t > 2*MAXPOWER || *t < -2*MAXPOWER
00425             || *m > 2*MAXPOWER || *m < -2*MAXPOWER ) {
00426             MLOCK(ErrorMessageLock);
00427             MesPrint("Illegal wildcard power combination.");
00428             MUNLOCK(ErrorMessageLock);
00429             goto NormMin;
00430         }
00431         *m += *t;
00432         if ( ( t[-1] <= NumSymbols && t[-1] > -MAXPOWER )
00433             && ( symbols[t[-1]].complex & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY
00434         ) {
00435             *m %= symbols[t[-1]].maxpower;
00436             if ( *m < 0 ) *m += symbols[t[-1]].maxpower;
00437             if ( ( symbols[t[-1]].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
00438                 if ( ( ( symbols[t[-1]].maxpower & 1 ) == 0 ) &&

```

```

00438             ( *m >= symbols[t[-1]].maxpower/2 ) ) {
00439                 *m -= symbols[t[-1]].maxpower/2; ncoef = -ncoef;
00440             }
00441         }
00442     }
00443     if ( *m >= 2*MAXPOWER || *m <= -2*MAXPOWER ) {
00444         MLOCK(ErrorMessageLock);
00445         MesPrint("Power overflow during normalization");
00446         MUNLOCK(ErrorMessageLock);
00447         goto NormMin;
00448     }
00449     if ( !*m ) {
00450         m--;
00451         while ( i < nsym )
00452             { *m = m[2]; m++; *m = m[2]; m++; i++; }
00453         ppsym -= 2;
00454         nsym--;
00455     }
00456     t++;
00457     goto NextSymbol;
00458 }
00459 } while ( *t < *m && --i > 0 );
00460 m = ppsym;
00461 while ( i < nsym )
00462     { m--; m[2] = *m; m--; m[2] = *m; i++; }
00463 *m++ = *t++;
00464 *m = *t++;
00465 ppsym += 2;
00466 nsym++;
00467 NextSymbol;
00468     } while ( t < r );
00469     m = from;
00470     break;
00471 case VECTOR :
00472     t += 2;
00473     do {
00474         if ( t[0] == AM.vectorzero ) goto NormZero;
00475         if ( t[1] == FUNNYVEC ) {
00476             pind[nind++] = *t;
00477             t += 2;
00478         }
00479         else if ( t[1] < 0 ) {
00480             if ( *t == NOINDEX && t[1] == NOINDEX ) t += 2;
00481             else {
00482                 if ( t[1] == AM.vectorzero ) goto NormZero;
00483                 *ppdot++ = *t++; *ppdot++ = *t++; *ppdot++ = 1; ndot++;
00484             }
00485         }
00486         else { *ppvec++ = *t++; *ppvec++ = *t++; nvec += 2; }
00487     } while ( t < r );
00488     break;
00489 case DOTPRODUCT :
00490     t += 2;
00491     do {
00492         if ( t[2] == 0 ) t += 3;
00493         else if ( ndot > 0 && t[0] == ppdot[-3]
00494             && t[1] == ppdot[-2] ) {
00495             ppdot[-1] += t[2];
00496             t += 3;
00497             if ( ppdot[-1] == 0 ) { ppdot -= 3; ndot--; }
00498         }
00499         else if ( t[0] == AM.vectorzero || t[1] == AM.vectorzero ) {
00500             if ( t[2] > 0 ) goto NormZero;
00501             goto NormInf;
00502         }
00503         else {
00504             *ppdot++ = *t++; *ppdot++ = *t++;
00505             *ppdot++ = *t++; ndot++;
00506         }
00507     } while ( t < r );
00508     break;
00509 case HAAKJE :
00510     break;
00511 case SETSET:
00512     if ( WildFill(BHEAD termout,term,AT.dummysubexp) < 0 ) goto FromNorm;
00513     i = *termout;
00514     t = termout; m = term;
00515     NCOPY(m,t,i);
00516     goto Restart;
00517 case DOLLAREXPRESSION :
00518 /*
00519     We have DOLLAREXPRESSION,4,number,power
00520     Replace by SUBEXPRESSION and exit elegantly to let
00521     TestSub pick it up. Of course look for special cases first.
00522     Note that we have a special compiler buffer for the values.
00523 */
00524     if ( AR.Eside != LHSIDE ) {

```

```

00525         DOLLARS d = Dollars + t[2];
00526 #ifdef WITHPTHREADS
00527         int nummodopt, ptype = -1;
00528         if ( AS.MultiThreaded ) {
00529             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00530                 if ( t[2] == ModOptdollars[nummodopt].number ) break;
00531             }
00532             if ( nummodopt < NumModOptdollars ) {
00533                 ptype = ModOptdollars[nummodopt].type;
00534                 if ( ptype == MODLOCAL ) {
00535                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
00536                 }
00537                 else {
00538                     LOCK(d->pthreadlockread);
00539                 }
00540             }
00541         }
00542 #endif
00543         if ( d->type == DOLZERO ) {
00544 #ifdef WITHPTHREADS
00545             if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00546 #endif
00547             if ( t[3] == 0 ) goto NormZZ;
00548             if ( t[3] < 0 ) goto NormInf;
00549             goto NormZero;
00550         }
00551         else if ( d->type == DOLNUMBER ) {
00552             nnum = d->where[0];
00553             if ( nnum > 0 ) {
00554                 nnum = d->where[nnum-1];
00555                 if ( nnum < 0 ) { ncoef = -ncoef; nnum = -nnum; }
00556                 nnum = (nnum-1)/2;
00557                 for ( i = 1; i <= nnum; i++ ) lnum[i-1] = d->where[i];
00558             }
00559             if ( nnum == 0 || ( nnum == 1 && lnum[0] == 0 ) ) {
00560 #ifdef WITHPTHREADS
00561                 if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00562 #endif
00563                 if ( t[3] < 0 ) goto NormInf;
00564                 else if ( t[3] == 0 ) goto NormZZ;
00565                 goto NormZero;
00566             }
00567             if ( t[3] && RaisPow(BHEAD (UWORD *)lnum,&nnum,(UWORD) (ABS(t[3]))) ) goto
FromNorm;
00568             ncoef = REDLENG(ncoef);
00569             if ( t[3] < 0 ) {
00570                 if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)lnum,nnum) ) {
00571 #ifdef WITHPTHREADS
00572                     if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00573 #endif
00574                     goto FromNorm;
00575                 }
00576             }
00577             else if ( t[3] > 0 ) {
00578                 if ( Mully(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)lnum,nnum) ) {
00579 #ifdef WITHPTHREADS
00580                     if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00581 #endif
00582                     goto FromNorm;
00583                 }
00584             }
00585             ncoef = INCLENG(ncoef);
00586         }
00587         else if ( d->type == DOLINDEX ) {
00588             if ( d->index == 0 ) {
00589 #ifdef WITHPTHREADS
00590                 if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00591 #endif
00592                 goto NormZero;
00593             }
00594             if ( d->index != NOINDEX ) pind[nind++] = d->index;
00595         }
00596         else if ( d->type == DOLTERMS ) {
00597             if ( t[3] >= MAXPOWER || t[3] <= -MAXPOWER ) {
00598                 if ( d->where[0] == 0 ) goto NormZero;
00599                 if ( d->where[d->where[0]] != 0 ) {
00600 IllDollarExp:
00601                     MLOCK(ErrorMessageLock);
00602                     MesPrint("!!!Illegal $ expansion with wildcard power!!!");
00603                     MUNLOCK(ErrorMessageLock);
00604                     goto FromNorm;
00605                 }
00606 /*
00607         At this point we should only admit symbols and dotproducts
00608         We expand the dollar directly and do not send it back.
00609 */
00610         { WORD *td, *tdstop, dj;

```

```

00611         td = d->where+1;
00612         tdstop = d->where+d->where[0];
00613         if ( tdstop[-1] != 3 || tdstop[-2] != 1
00614             || tdstop[-3] != 1 ) goto IllDollarExp;
00615         tdstop -= 3;
00616         if ( td >= tdstop ) goto IllDollarExp;
00617         while ( td < tdstop ) {
00618             if ( *td == SYMBOL ) {
00619                 for ( dj = 2; dj < td[1]; dj += 2 ) {
00620                     if ( td[dj+1] == 1 ) {
00621                         *ppsym++ = td[dj];
00622                         *ppsym++ = t[3];
00623                         nsym++;
00624                     }
00625                     else if ( td[dj+1] == -1 ) {
00626                         *ppsym++ = td[dj];
00627                         *ppsym++ = -t[3];
00628                         nsym++;
00629                     }
00630                     else goto IllDollarExp;
00631                 }
00632             }
00633             else if ( *td == DOTPRODUCT ) {
00634                 for ( dj = 2; dj < td[1]; dj += 3 ) {
00635                     if ( td[dj+2] == 1 ) {
00636                         *ppdot++ = td[dj];
00637                         *ppdot++ = td[dj+1];
00638                         *ppdot++ = t[3];
00639                         ndot++;
00640                     }
00641                     else if ( td[dj+2] == -1 ) {
00642                         *ppdot++ = td[dj];
00643                         *ppdot++ = td[dj+1];
00644                         *ppdot++ = -t[3];
00645                         ndot++;
00646                     }
00647                     else goto IllDollarExp;
00648                 }
00649             }
00650             else goto IllDollarExp;
00651             td += td[1];
00652         }
00653         regval = 2;
00654         break;
00655     }
00656 }
00657 t[0] = SUBEXPRESSION;
00658 t[4] = AM.dbufnum;
00659 if ( t[3] == 0 ) {
00660 #ifdef WITHPTHREADS
00661     if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00662 #endif
00663     break;
00664 }
00665 regval = 2;
00666 t = r;
00667 while ( t < m ) {
00668     if ( *t == DOLLAREXPRESSION ) {
00669 #ifdef WITHPTHREADS
00670         if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00671 #endif
00672         d = Dollars + t[2];
00673 #ifdef WITHPTHREADS
00674         if ( AS.MultiThreaded ) {
00675             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
00676                 if ( t[2] == ModOptdollars[nummodopt].number ) break;
00677             }
00678             if ( nummodopt < NumModOptdollars ) {
00679                 ptype = ModOptdollars[nummodopt].type;
00680                 if ( ptype == MODLOCAL ) {
00681                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
00682                 }
00683                 else {
00684                     LOCK(d->pthreadlockread);
00685                 }
00686             }
00687         }
00688 #endif
00689         if ( d->type == DOLTERMS ) {
00690             t[0] = SUBEXPRESSION;
00691             t[4] = AM.dbufnum;
00692         }
00693     }
00694     t += t[1];
00695 }
00696 #ifdef WITHPTHREADS
00697     if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }

```

```

00698 #endif
00699         goto RegEnd;
00700     }
00701     else {
00702 #ifdef WITHPTHREADS
00703         if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00704 #endif
00705         MLOCK(ErrorMessageLock);
00706         MesPrint("!!!This $ variation has not been implemented yet!!!");
00707         MUNLOCK(ErrorMessageLock);
00708         goto NormMin;
00709     }
00710 #ifdef WITHPTHREADS
00711     if ( ptype > 0 && ptype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
00712 #endif
00713     }
00714     else {
00715         pnco[ncco++] = t;
00716 /*
00717         The next statement should be safe as the value is used
00718         only by the compiler (ie the master).
00719 */
00720         AC.lhdollarflag = 1;
00721     }
00722     break;
00723 case DELTA :
00724     t += 2;
00725     do {
00726         if ( *t < 0 ) {
00727             if ( *t == SUMMEDIND ) {
00728                 if ( t[1] < -NMIN4SHIFT ) {
00729                     k = -t[1]-NMIN4SHIFT;
00730                     k = ExtraSymbol(k,1,nsym,ppsym,&ncoef);
00731                     nsym += k;
00732                     ppsym += (k * 2);
00733                 }
00734                 else if ( t[1] == 0 ) goto NormZero;
00735                 else {
00736                     if ( t[1] < 0 ) {
00737                         lnum[0] = -t[1];
00738                         nnum = -1;
00739                     }
00740                     else {
00741                         lnum[0] = t[1];
00742                         nnum = 1;
00743                     }
00744                     ncoef = REDLENG(ncoef);
00745                     if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
00746                         goto FromNorm;
00747                     ncoef = INCLENG(ncoef);
00748                 }
00749                 t += 2;
00750             }
00751             else if ( *t == NOINDEX && t[1] == NOINDEX ) t += 2;
00752             else if ( *t == EMPTYINDEX && t[1] == EMPTYINDEX ) {
00753                 *ppdel++ = *t++; *ppdel++ = *t++; ndel += 2;
00754             }
00755             else
00756                 if ( t[1] < 0 ) {
00757                     *ppdot++ = *t++; *ppdot++ = *t++; *ppdot++ = 1; ndot++;
00758                 }
00759             else {
00760                 *ppvec++ = *t++; *ppvec++ = *t++; nvec += 2;
00761             }
00762         }
00763         else {
00764             if ( t[1] < 0 ) {
00765                 *ppvec++ = t[1]; *ppvec++ = *t; t+=2; nvec += 2;
00766             }
00767             else { *ppdel++ = *t++; *ppdel++ = *t++; ndel += 2; }
00768         }
00769     } while ( t < r );
00770     break;
00771 case FACTORIAL :
00772 /*
00773     (FACTORIAL,FUNHEAD+2,..,-SNUMBER,number)
00774 */
00775     if ( t[FUNHEAD] == -SNUMBER && t[1] == FUNHEAD+2
00776         && t[FUNHEAD+1] >= 0 ) {
00777         if ( Factorial(BHEAD t[FUNHEAD+1],(UWORD *)lnum,&nnum) )
00778             goto FromNorm;
00779 MulIn:
00780         ncoef = REDLENG(ncoef);
00781         if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) ) goto FromNorm;
00782         ncoef = INCLENG(ncoef);
00783     }
00784     else pcom[ncom++] = t;

```



```

00785         break;
00786     case BERNOULLIFUNCTION :
00787     /*
00788         (BERNOULLIFUNCTION,FUNHEAD+2,...,-SNUMBER,number)
00789     */
00790         if ( ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] >= 0 )
00791             && ( t[1] == FUNHEAD+2 || ( t[1] == FUNHEAD+4 &&
00792 t[FUNHEAD+2] == -SNUMBER && ABS(t[FUNHEAD+3]) == 1 ) ) ) {
00793             WORD inum, mnum;
00794             if ( Bernoulli(t[FUNHEAD+1], (UWORD *)lnum,&nnum) )
00795                 goto FromNorm;
00796             if ( nnum == 0 ) goto NormZero;
00797             inum = nnum; if ( inum < 0 ) inum = -inum;
00798             inum--; inum /= 2;
00799             mnum = inum;
00800             while ( lnum[mnum-1] == 0 ) mnum--;
00801             if ( nnum < 0 ) mnum = -mnum;
00802             ncoef = REDLENG(ncoef);
00803             if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,mnum) ) goto FromNorm;
00804             mnum = inum;
00805             while ( lnum[inum+mnum-1] == 0 ) mnum--;
00806             if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *) (lnum+inum),mnum) ) goto
FromNorm;
00807             ncoef = INCLENG(ncoef);
00808             if ( t[1] == FUNHEAD+4 && t[FUNHEAD+1] == 1
00809                 && t[FUNHEAD+3] == -1 ) ncoef = -ncoef;
00810         }
00811         else pcom[ncom++] = t;
00812         break;
00813     case NUMARGSFUN:
00814     /*
00815         Numerical function giving the number of arguments.
00816     */
00817         k = 0;
00818         t += FUNHEAD;
00819         while ( t < r ) {
00820             k++;
00821             NEXTARG(t);
00822         }
00823         if ( k == 0 ) goto NormZero;
00824         *((UWORD *)lnum) = k;
00825         nnum = 1;
00826         goto MulIn;
00827     case NUMFACTORS:
00828     /*
00829         Numerical function giving the number of factors in an expression.
00830     */
00831         t += FUNHEAD;
00832         if ( *t == -EXPRESSION ) {
00833             k = AS.OldNumFactors[t[1]];
00834         }
00835         else if ( *t == -DOLLAREXPRESSION ) {
00836             k = Dollars[t[1]].nfactors;
00837         }
00838         else {
00839             pcom[ncom++] = t;
00840             break;
00841         }
00842         if ( k == 0 ) goto NormZero;
00843         *((UWORD *)lnum) = k;
00844         nnum = 1;
00845         goto MulIn;
00846     case NUMTERMSFUN:
00847     /*
00848         Numerical function giving the number of terms in the single argument.
00849     */
00850         if ( t[FUNHEAD] < 0 ) {
00851             if ( t[FUNHEAD] <= -FUNCTION && t[1] == FUNHEAD+1 ) break;
00852             if ( t[FUNHEAD] > -FUNCTION && t[1] == FUNHEAD+2 ) {
00853                 if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] == 0 ) goto NormZero;
00854                 break;
00855             }
00856             pcom[ncom++] = t;
00857             break;
00858         }
00859         if ( t[FUNHEAD] > 0 && t[FUNHEAD] == t[1]-FUNHEAD ) {
00860             k = 0;
00861             t += FUNHEAD+ARGHEAD;
00862             while ( t < r ) {
00863                 k++;
00864                 t += *t;
00865             }
00866             if ( k == 0 ) goto NormZero;
00867             *((UWORD *)lnum) = k;
00868             nnum = 1;
00869             goto MulIn;
00870         }

```

```

00871         else pcom[ncom++] = t;
00872         break;
00873     case COUNTFUNCTION:
00874         if ( AN.cTerm ) {
00875             k = CountFun(AN.cTerm,t);
00876         }
00877         else {
00878             k = CountFun(term,t);
00879         }
00880         if ( k == 0 ) goto NormZero;
00881         if ( k > 0 ) { *((UWORD *)lnum) = k; nnum = 1; }
00882         else { *((UWORD *)lnum) = -k; nnum = -1; }
00883         goto MulIn;
00884         break;
00885     case MAKERATIONAL:
00886         if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+2] == -SNUMBER
00887             && t[1] == FUNHEAD+4 && t[FUNHEAD+3] > 1 ) {
00888             WORD x1[2], sgn;
00889             if ( t[FUNHEAD+1] == 0 ) goto NormZero;
00890             if ( t[FUNHEAD+1] < 0 ) { t[FUNHEAD+1] = -t[FUNHEAD+1]; sgn = -1; }
00891             else sgn = 1;
00892             if ( MakeRational(t[FUNHEAD+1],t[FUNHEAD+3],x1,x1+1) ) {
00893                 static int warnflag = 1;
00894                 if ( warnflag ) {
00895                     MesPrint("%w Warning: fraction could not be reconstructed in
MakeRational_");
00896                     warnflag = 0;
00897                 }
00898                 x1[0] = t[FUNHEAD+1]; x1[1] = 1;
00899             }
00900             if ( sgn < 0 ) { t[FUNHEAD+1] = -t[FUNHEAD+1]; x1[0] = -x1[0]; }
00901             if ( x1[0] < 0 ) { sgn = -1; x1[0] = -x1[0]; }
00902             else sgn = 1;
00903             ncoef = REDLENG(ncoef);
00904             if ( MulRat(BHEAD (UWORD *)n_coef,ncoef, (UWORD *)x1,sgn,
00905                 (UWORD *)n_coef,&ncoef) ) goto FromNorm;
00906             ncoef = INCLENG(ncoef);
00907         }
00908         else {
00909             WORD nargs = 0, *tt, *ttstop, *arg1 = 0, *arg2 = 0;
00910             UWORD *x1, *x2, *xx;
00911             WORD nx1,nx2,nxx;
00912             ttstop = t + t[1]; tt = t+FUNHEAD;
00913             while ( tt < ttstop ) {
00914                 nargs++;
00915                 if ( nargs == 1 ) arg1 = tt;
00916                 else arg2 = tt;
00917                 NEXTARG(tt);
00918             }
00919             if ( nargs != 2 ) goto defaultcase;
00920             if ( *arg2 == -SNUMBER && arg2[1] <= 1 ) goto defaultcase;
00921             else if ( *arg2 > 0 && ttstop[-1] < 0 ) goto defaultcase;
00922             x1 = NumberMalloc("Norm-MakeRational");
00923             if ( *arg1 == -SNUMBER ) {
00924                 if ( arg1[1] == 0 ) {
00925                     NumberFree(x1,"Norm-MakeRational");
00926                     goto NormZero;
00927                 }
00928                 if ( arg1[1] < 0 ) { x1[0] = -arg1[1]; nx1 = -1; }
00929                 else { x1[0] = arg1[1]; nx1 = 1; }
00930             }
00931             else if ( *arg1 > 0 ) {
00932                 WORD *tc;
00933                 nx1 = (ABS(arg2[-1])-1)/2;
00934                 tc = arg1+ARGHEAD+1+nx1;
00935                 if ( tc[0] != 1 ) {
00936                     NumberFree(x1,"Norm-MakeRational");
00937                     goto defaultcase;
00938                 }
00939                 for ( i = 1; i < nx1; i++ ) if ( tc[i] != 0 ) {
00940                     NumberFree(x1,"Norm-MakeRational");
00941                     goto defaultcase;
00942                 }
00943                 tc = arg1+ARGHEAD+1;
00944                 for ( i = 0; i < nx1; i++ ) x1[i] = tc[i];
00945                 if ( arg2[-1] < 0 ) nx1 = -nx1;
00946             }
00947             else {
00948                 NumberFree(x1,"Norm-MakeRational");
00949                 goto defaultcase;
00950             }
00951             x2 = NumberMalloc("Norm-MakeRational");
00952             if ( *arg2 == -SNUMBER ) {
00953                 if ( arg2[1] <= 1 ) {
00954                     NumberFree(x2,"Norm-MakeRational");
00955                     NumberFree(x1,"Norm-MakeRational");
00956                     goto defaultcase;

```

```

00957         }
00958         else { x2[0] = arg2[1]; nx2 = 1; }
00959     }
00960     else if ( *arg2 > 0 ) {
00961         WORD *tc;
00962         nx2 = (ttstop[-1]-1)/2;
00963         tc = arg2+ARGHEAD+1+nx2;
00964         if ( tc[0] != 1 ) {
00965             NumberFree(x2,"Norm-MakeRational");
00966             NumberFree(x1,"Norm-MakeRational");
00967             goto defaultcase;
00968         }
00969         for ( i = 1; i < nx2; i++ ) if ( tc[i] != 0 ) {
00970             NumberFree(x2,"Norm-MakeRational");
00971             NumberFree(x1,"Norm-MakeRational");
00972             goto defaultcase;
00973         }
00974         tc = arg2+ARGHEAD+1;
00975         for ( i = 0; i < nx2; i++ ) x2[i] = tc[i];
00976     }
00977     else {
00978         NumberFree(x2,"Norm-MakeRational");
00979         NumberFree(x1,"Norm-MakeRational");
00980         goto defaultcase;
00981     }
00982     if ( BigLong(x1,ABS(nx1),x2,nx2) >= 0 ) {
00983         UWORD *x3 = NumberMalloc("Norm-MakeRational");
00984         UWORD *x4 = NumberMalloc("Norm-MakeRational");
00985         WORD nx3, nx4;
00986         DivLong(x1,nx1,x2,nx2,x3,&nx3,x4,&nx4);
00987         for ( i = 0; i < ABS(nx4); i++ ) x1[i] = x4[i];
00988         nx1 = nx4;
00989         NumberFree(x4,"Norm-MakeRational");
00990         NumberFree(x3,"Norm-MakeRational");
00991     }
00992     xx = (UWORD *) (TermMalloc("Norm-MakeRational"));
00993     if ( MakeLongRational(BHEAD x1,nx1,x2,nx2,xx,&nxx) ) {
00994         static int warnflag = 1;
00995         if ( warnflag ) {
00996             MesPrint("%w Warning: fraction could not be reconstructed in
MakeRational_");
00997             warnflag = 0;
00998         }
00999         ncoef = REDLENG(ncoef);
01000         if ( Mully(BHEAD (UWORD *)n_coef,&ncoef,x1,nx1) )
01001             goto FromNorm;
01002     }
01003     else {
01004         ncoef = REDLENG(ncoef);
01005         if ( MulRat(BHEAD (UWORD *)n_coef,ncoef,xx,nxx,
01006             (UWORD *)n_coef,&ncoef) ) goto FromNorm;
01007     }
01008     ncoef = INCLENG(ncoef);
01009     TermFree(xx,"Norm-MakeRational");
01010     NumberFree(x2,"Norm-MakeRational");
01011     NumberFree(x1,"Norm-MakeRational");
01012 }
01013 break;
01014 case TERMFUNCTION:
01015     if ( t[1] == FUNHEAD && AN.cTerm ) {
01016         ANsr = r; ANsm = m; ANsc = AN.cTerm;
01017         AN.cTerm = 0;
01018         t = ANsc + 1;
01019         m = ANsc + *ANsc;
01020         ncoef = REDLENG(ncoef);
01021         nnum = REDLENG(m[-1]);
01022         m -= ABS(m[-1]);
01023         if ( MulRat(BHEAD (UWORD *)n_coef,ncoef,(UWORD *)m,nnum,
01024             (UWORD *)n_coef,&ncoef) ) goto FromNorm;
01025         ncoef = INCLENG(ncoef);
01026         r = t;
01027     }
01028     break;
01029 case FIRSTBRACKET:
01030     if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -EXPRESSION ) {
01031         if ( GetFirstBracket(termout,t[FUNHEAD+1]) < 0 ) goto FromNorm;
01032         if ( *termout == 0 ) goto NormZero;
01033         if ( *termout > 4 ) {
01034             WORD *r1, *r2, *r3;
01035             while ( r < m ) *t++ = *r++;
01036             r1 = term + *term;
01037             r2 = termout + *termout; r2 -= ABS(r2[-1]);
01038             while ( r < r1 ) *r2++ = *r++;
01039             r3 = termout + 1;
01040             while ( r3 < r2 ) *t++ = *r3++;
01041             *term = t - term;
01042             if ( AT.WorkPointer > term && AT.WorkPointer < t )

```

```

01043             AT.WorkPointer = t;
01044             goto Restart;
01045         }
01046     }
01047     break;
01048 case FIRSTTERM:
01049 case CONTENTTERM:
01050     if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -EXPRESSION ) {
01051     {
01052         EXPRESSIONS e = Expressions+t[FUNHEAD+1];
01053         POSITION oldondisk = AS.OldOnFile[t[FUNHEAD+1]];
01054         if ( e->replace == NEWLYDEFINEDEXPRESSION ) {
01055             AS.OldOnFile[t[FUNHEAD+1]] = e->onfile;
01056         }
01057         if ( *t == FIRSTTERM ) {
01058             if ( GetFirstTerm(termout,t[FUNHEAD+1],0) < 0 ) goto FromNorm;
01059         }
01060         else if ( *t == CONTENTTERM ) {
01061             if ( GetContent(termout,t[FUNHEAD+1]) < 0 ) goto FromNorm;
01062         }
01063         AS.OldOnFile[t[FUNHEAD+1]] = oldondisk;
01064         if ( *termout == 0 ) goto NormZero;
01065     }
01066 PasteIn;;
01067     {
01068         WORD *r1, *r2, *r3, *r4, *r5, nrl, *rterm;
01069         r2 = termout + *termout; lnum = r2 - ABS(r2[-1]);
01070         nnum = REDLENG(r2[-1]);
01071
01072         r1 = term + *term; r3 = r1 - ABS(r1[-1]);
01073         nrl = REDLENG(r1[-1]);
01074         if ( Mully(BHEAD (UWORD *)lnum,&nnum,(UWORD *)r3,nrl) ) goto FromNorm;
01075         nnum = INCLENG(nnum); nrl = ABS(nnum); lnum[nrl-1] = nnum;
01076         rterm = TermMalloc("FirstTerm/ContentTerm");
01077         r4 = rterm+1; r5 = term+1; while ( r5 < t ) *r4++ = *r5++;
01078         r5 = termout+1; while ( r5 < lnum ) *r4++ = *r5++;
01079         r5 = r; while ( r5 < r3 ) *r4++ = *r5++;
01080         r5 = lnum; NCOPY(r4,r5,nrl);
01081         *rterm = r4-rterm;
01082         nrl = *rterm; r1 = term; r2 = rterm; NCOPY(r1,r2,nrl);
01083         TermFree(rterm,"FirstTerm/ContentTerm");
01084         if ( AT.WorkPointer > term && AT.WorkPointer < r1 )
01085             AT.WorkPointer = r1;
01086         goto Restart;
01087     }
01088 }
01089 else if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -DOLLAREXPRESSION ) {
01090     DOLLARS d = Dollars + t[FUNHEAD+1], newd = 0;
01091     int idol, ido;
01092 #ifdef WITHPTHREADS
01093     int nummodopt, dtype = -1;
01094     if ( AS.MultiThreaded && ( AC.mparalelflag == PARALLELFLAG ) ) {
01095         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01096             if ( t[FUNHEAD+1] == ModOptdollars[nummodopt].number ) break;
01097         }
01098         if ( nummodopt < NumModOptdollars ) {
01099             dtype = ModOptdollars[nummodopt].type;
01100             if ( dtype == MODLOCAL ) {
01101                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
01102             }
01103         }
01104     }
01105 #endif
01106     if ( d->where && ( d->type == DOLTERMS || d->type == DOLNUMBER ) ) {
01107         newd = d;
01108     }
01109     else {
01110         if ( ( newd = DolToTerms(BHEAD t[FUNHEAD+1]) ) == 0 )
01111             goto NormZero;
01112     }
01113     if ( newd->where[0] == 0 ) {
01114         M_free(newd,"Copy of dollar variable");
01115         goto NormZero;
01116     }
01117     if ( *t == FIRSTTERM ) {
01118         idol = newd->where[0];
01119         for ( ido = 0; ido < idol; ido++ ) termout[idol] = newd->where[idol];
01120     }
01121     else if ( *t == CONTENTTERM ) {
01122         WORD *tterm;
01123         tterm = newd->where;
01124         idol = tterm[0];
01125         for ( ido = 0; ido < idol; ido++ ) termout[idol] = tterm[idol];
01126         tterm += *tterm;
01127         while ( *tterm ) {
01128             if ( ContentMerge(BHEAD termout,tterm) < 0 ) goto FromNorm;
01129             tterm += *tterm;

```

```

01130     }
01131     }
01132     if ( newd != d ) {
01133         if ( newd->factors ) M_free(newd->factors,"Dollar factors");
01134         M_free(newd,"Copy of dollar variable");
01135         newd = 0;
01136     }
01137     goto PasteIn;
01138 }
01139 break;
01140 case TERMSINEXPR:
01141 {
01142     if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -EXPRESSION ) {
01143         x = TermsInExpression(t[FUNHEAD+1]);
01144 multermnum:
01145         if ( x == 0 ) goto NormZero;
01146         if ( x < 0 ) {
01147             x = -x;
01148             if ( x > (LONG)WORDMASK ) { lnum[0] = x & WORDMASK;
01149                 lnum[1] = x >> BITSINWORD; nnum = -2;
01150             }
01151             else { lnum[0] = x; nnum = -1; }
01152         }
01153         else if ( x > (LONG)WORDMASK ) {
01154             lnum[0] = x & WORDMASK;
01155             lnum[1] = x >> BITSINWORD;
01156             nnum = 2;
01157         }
01158         else { lnum[0] = x; nnum = 1; }
01159         ncoef = REDLENG(ncoef);
01160         if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
01161             goto FromNorm;
01162         ncoef = INCLENG(ncoef);
01163     }
01164     else if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -DOLLAREXPRESSION ) {
01165         x = TermsInDollar(t[FUNHEAD+1]);
01166         goto multermnum;
01167     }
01168     else { pcom[ncom++] = t; }
01169 }
01170 break;
01171 case SIZEOFFUNCTION:
01172 {
01173     if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -EXPRESSION ) {
01174         x = SizeOfExpression(t[FUNHEAD+1]);
01175         goto multermnum;
01176     }
01177     else if ( ( t[1] == FUNHEAD+2 ) && t[FUNHEAD] == -DOLLAREXPRESSION ) {
01178         x = SizeOfDollar(t[FUNHEAD+1]);
01179         goto multermnum;
01180     }
01181     else { pcom[ncom++] = t; }
01182 }
01183 break;
01184 case MATCHFUNCTION:
01185 case PATTERNFUNCTION:
01186     break;
01187 case BINOMIAL:
01188 /*
01189     Binomial function for internal use for the moment.
01190     The routine in reken.c should be more efficient.
01191 */
01192 if ( t[1] == FUNHEAD+4 && t[FUNHEAD] == -SNUMBER
01193     && t[FUNHEAD+1] >= 0 && t[FUNHEAD+2] == -SNUMBER
01194     && t[FUNHEAD+3] >= 0 && t[FUNHEAD+1] >= t[FUNHEAD+3] ) {
01195     if ( t[FUNHEAD+1] > t[FUNHEAD+3] ) {
01196         if ( GetBinom((UWORD *)lnum,&nnum,
01197             t[FUNHEAD+1],t[FUNHEAD+3]) ) goto FromNorm;
01198         if ( nnum == 0 ) goto NormZero;
01199         goto MulIn;
01200     }
01201     else pcom[ncom++] = t;
01202     break;
01203 case SIGNFUN:
01204 /*
01205     Numerical function giving (-1)^arg
01206 */
01207 if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER ) {
01208     if ( ( t[FUNHEAD+1] & 1 ) != 0 ) ncoef = -ncoef;
01209 }
01210 else if ( ( t[FUNHEAD] > 0 ) && ( t[1] == FUNHEAD+t[FUNHEAD] ) )
01211 && ( t[FUNHEAD] == ARGHEAD+1+abs(t[t[1]-1]) ) ) {
01212     UWORD *numer1,*denom1;
01213     WORD nsize = abs(t[t[1]-1]), nnsiz, isize;
01214     nnsiz = (nsize-1)/2;
01215     numer1 = (UWORD *)t + FUNHEAD+ARGHEAD+1;
01216     denom1 = numer1 + nnsiz;

```

```

01217         for ( isize = 1; isize < nnsz; isize++ ) {
01218             if ( denom1[isize] ) break;
01219         }
01220         if ( ( denom1[0] != 1 ) || isize < nnsz ) {
01221             pcom[ncom++] = t;
01222         }
01223         else {
01224             if ( ( numer1[0] & 1 ) != 0 ) ncoef = -ncoef;
01225         }
01226     }
01227     else {
01228         goto doflags;
01229     /*
01230         pcom[ncom++] = t; */
01231     }
01232     break;
01233 case SIGFUNCTION:
01234     /*
01235     Numerical function giving the sign of the numerical argument
01236     The sign of zero is 1.
01237     If there are roots of unity they are part of the sign.
01238     */
01239     if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER ) {
01240         if ( t[FUNHEAD+1] < 0 ) ncoef = -ncoef;
01241     }
01242     else if ( ( t[1] == FUNHEAD+2 ) && ( t[FUNHEAD] == -SYMBOL )
01243         && ( ( t[FUNHEAD+1] <= NumSymbols && t[FUNHEAD+1] > -MAXPOWER )
01244         && ( symbols[t[FUNHEAD+1]].complex & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY ) ) {
01245         k = t[FUNHEAD+1];
01246         from = m;
01247         i = nsym;
01248         m = ppsym;
01249         if ( i > 0 ) do {
01250             m -= 2;
01251             if ( k == *m ) {
01252                 m++;
01253                 *m = *m + 1;
01254                 *m %= symbols[k].maxpower;
01255                 if ( ( symbols[k].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
01256                     if ( ( ( symbols[k].maxpower & 1 ) == 0 ) &&
01257                         ( *m >= symbols[k].maxpower/2 ) ) {
01258                         *m -= symbols[k].maxpower/2; ncoef = -ncoef;
01259                     }
01260                 }
01261                 if ( !*m ) {
01262                     m--;
01263                     while ( i < nsym )
01264                         { *m = m[2]; m++; *m = m[2]; m++; i++; }
01265                     ppsym -= 2;
01266                     nsym--;
01267                     goto sigDoneSymbol;
01268                 }
01269             } while ( k < *m && --i > 0 );
01270             m = ppsym;
01271             while ( i < nsym )
01272                 { m--; m[2] = *m; m--; m[2] = *m; i++; }
01273             *m++ = k;
01274             *m = 1;
01275             ppsym += 2;
01276             nsym++;
01277 sigDoneSymbol:;
01278             m = from;
01279         }
01280     else if ( ( t[FUNHEAD] > 0 ) && ( t[1] == FUNHEAD+t[FUNHEAD] ) ) {
01281         if ( t[FUNHEAD] == ARGHEAD+1+abs(t[t[1]-1]) ) {
01282             if ( t[t[1]-1] < 0 ) ncoef = -ncoef;
01283         }
01284     /*
01285     Now we should fish out the roots of unity
01286     */
01287     else if ( ( t[FUNHEAD+ARGHEAD]+FUNHEAD+ARGHEAD == t[1] )
01288         && ( t[FUNHEAD+ARGHEAD+1] == SYMBOL ) ) {
01289         WORD *ts = t + FUNHEAD+ARGHEAD+3;
01290         WORD its = ts[-1]-2;
01291         while ( its > 0 ) {
01292             if ( ( *ts != 0 ) && ( ( *ts > NumSymbols || *ts <= -MAXPOWER )
01293                 || ( symbols[*ts].complex & VARTYPEROOTOFUNITY ) != VARTYPEROOTOFUNITY ) )
01294                 goto signogood;
01295             }
01296         ts += 2; its -= 2;
01297     }
01298     /*
01299     Now we have only roots of unity which should be
01300     registered in the list of symbols.
01301     */

```

```

01302         if ( t[t[1]-1] < 0 ) ncoef = -ncoef;
01303         ts = t + FUNHEAD+ARGHEAD+3;
01304         its = ts[-1]-2;
01305         from = m;
01306         while ( its > 0 ) {
01307             i = nsym;
01308             m = ppsym;
01309             if ( i > 0 ) do {
01310                 m -= 2;
01311                 if ( *ts == *m ) {
01312                     ts++; m++;
01313                     *m += *ts;
01314                     if ( ( ts[-1] <= NumSymbols && ts[-1] > -MAXPOWER ) &&
01315                         ( symbols[ts[-1]].complex & VARTYPEROOTOFUNITY ) ==
VARTYPEROOTOFUNITY ) {
01316                         *m %= symbols[ts[-1]].maxpower;
01317                         if ( *m < 0 ) *m += symbols[ts[-1]].maxpower;
01318                         if ( ( symbols[ts[-1]].complex & VARTYPEMINUS ) ==
VARTYPEMINUS ) {
01319                             if ( ( ( symbols[ts[-1]].maxpower & 1 ) == 0 ) &&
01320                                 ( *m >= symbols[ts[-1]].maxpower/2 ) ) {
01321                                 *m -= symbols[ts[-1]].maxpower/2; ncoef = -ncoef;
01322                             }
01323                         }
01324                     }
01325                     if ( !*m ) {
01326                         m--;
01327                         while ( i < nsym )
01328                             { *m = m[2]; m++; *m = m[2]; m++; i++; }
01329                         ppsym -= 2;
01330                         nsym--;
01331                     }
01332                     ts++; its -= 2;
01333                     goto sigNextSymbol;
01334                 }
01335             } while ( *ts < *m && --i > 0 );
01336             m = ppsym;
01337             while ( i < nsym )
01338                 { m--; m[2] = *m; m--; m[2] = *m; i++; }
01339             *m++ = *ts++;
01340             *m = *ts++;
01341             ppsym += 2;
01342             nsym++; its -= 2;
01343 sigNextSymbol:;
01344         }
01345         m = from;
01346     }
01347     else {
01348 signogood:         pcom[ncom++] = t;
01349     }
01350 }
01351 else pcom[ncom++] = t;
01352 break;
01353 case ABSFUNCTION:
01354 /*
01355     Numerical function giving the absolute value of the
01356     numerical argument. Or roots of unity.
01357 */
01358     if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER ) {
01359         k = t[FUNHEAD+1];
01360         if ( k < 0 ) k = -k;
01361         if ( k == 0 ) goto NormZero;
01362         *((UWORD *)lnum) = k; nnum = 1;
01363         goto MulIn;
01364     }
01365 }
01366 else if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SYMBOL ) {
01367     k = t[FUNHEAD+1];
01368     if ( ( k > NumSymbols || k <= -MAXPOWER )
01369         || ( symbols[k].complex & VARTYPEROOTOFUNITY ) != VARTYPEROOTOFUNITY )
01370         goto absnogood;
01371 }
01372 else if ( ( t[FUNHEAD] > 0 ) && ( t[1] == FUNHEAD+t[FUNHEAD] )
01373     && ( t[1] == FUNHEAD+ARGHEAD+t[FUNHEAD+ARGHEAD] ) ) {
01374     if ( t[FUNHEAD] == ARGHEAD+1+abs(t[t[1]-1]) ) {
01375         WORD *ts;
01376         ts = t + t[1] -1;
01377         ncoef = REDLENG(ncoef);
01378         nnum = REDLENG(*ts);
01379         if ( nnum < 0 ) nnum = -nnum;
01380         if ( MulRat(BHEAD (UWORD *)n_coef,ncoef,
01381             (UWORD *) (ts-ABS(*ts)+1),nnum,
01382             (UWORD *)n_coef,&ncoef) ) goto FromNorm;
01383         ncoef = INCLENG(ncoef);
01384     }
01385 /*
01386     Now get rid of the roots of unity. This includes i_

```

```

01387 */
01388
01389         else if ( t[FUNHEAD+ARGHEAD+1] == SYMBOL ) {
01390             WORD *ts = t+FUNHEAD+ARGHEAD+1;
01391             WORD its = ts[1] - 2;
01392             ts += 2;
01393             while ( its > 0 ) {
01394                 if ( *ts == 0 ) { }
01395                 else if ( ( *ts > NumSymbols || *ts <= -MAXPOWER )
01396                     || ( symbols[*ts].complex & VARTYPEROOTOFUNITY )
01397                     != VARTYPEROOTOFUNITY ) goto absnogood;
01398                 its -= 2; ts += 2;
01399             }
01400             goto absnosymbols;
01401         }
01402     else {
01403         pcom[ncom++] = t;
01404     }
01405     else pcom[ncom++] = t;
01406     break;
01407 case MODFUNCTION:
01408 case MOD2FUNCTION:
01409     /*
01410     Mod function. Does work if two arguments and the
01411     second argument is a positive short number
01412     */
01413     if ( t[1] == FUNHEAD+4 && t[FUNHEAD] == -SNUMBER
01414         && t[FUNHEAD+2] == -SNUMBER && t[FUNHEAD+3] > 1 ) {
01415         WORD tmod;
01416         tmod = (t[FUNHEAD+1]*t[FUNHEAD+3]);
01417         if ( tmod < 0 ) tmod += t[FUNHEAD+3];
01418         if ( *t == MOD2FUNCTION && tmod > t[FUNHEAD+3]/2 )
01419             tmod -= t[FUNHEAD+3];
01420         if ( tmod < 0 ) {
01421             *((UWORD *)lnum) = -tmod;
01422             nnum = -1;
01423         }
01424         else if ( tmod > 0 ) {
01425             *((UWORD *)lnum) = tmod;
01426             nnum = 1;
01427         }
01428         else goto NormZero;
01429         goto MulIn;
01430     }
01431     else if ( t[1] > t[FUNHEAD+2] && t[FUNHEAD] > 0
01432         && t[FUNHEAD+t[FUNHEAD]] == -SNUMBER
01433         && t[FUNHEAD+t[FUNHEAD]+1] > 1
01434         && t[1] == FUNHEAD+2+t[FUNHEAD] ) {
01435         WORD *ttt = t+FUNHEAD, iii;
01436         iii = ttt[*ttt-1];
01437         if ( *ttt == ttt[ARGHEAD]+ARGHEAD &&
01438             ttt[ARGHEAD] == ABS(iii)+1 ) {
01439             WORD ncm = 1;
01440             WORD cm = ttt[*ttt+1];
01441             iii = REDLENG(iii);
01442             if ( *t == MODFUNCTION ) {
01443                 if ( TakeModulus((UWORD *) (ttt+ARGHEAD+1),
01444                     &iii, (UWORD *) (&cm), ncm, UNPACK|NOINVERSES) )
01445                     goto FromNorm;
01446             }
01447             else {
01448                 if ( TakeModulus((UWORD *) (ttt+ARGHEAD+1),
01449                     &iii, (UWORD *) (&cm), ncm, UNPACK|POSNEG|NOINVERSES) )
01450                     goto FromNorm;
01451             }
01452             if ( *t == MOD2FUNCTION && ttt[ARGHEAD+1] > cm/2 && iii > 0 ) {
01453                 ttt[ARGHEAD+1] -= cm;
01454             }
01455             if ( ttt[ARGHEAD+1] < 0 ) {
01456                 *((UWORD *)lnum) = -ttt[ARGHEAD+1];
01457                 nnum = -1;
01458             }
01459             else if ( ttt[ARGHEAD+1] > 0 ) {
01460                 *((UWORD *)lnum) = ttt[ARGHEAD+1];
01461                 nnum = 1;
01462             }
01463             else goto NormZero;
01464             goto MulIn;
01465         }
01466     }
01467     else if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER ) {
01468         *((UWORD *)lnum) = t[FUNHEAD+1];
01469         if ( *lnum == 0 ) goto NormZero;
01470         nnum = 1;
01471         goto MulIn;
01472     }
01473     else if ( ( ( t[FUNHEAD] < 0 ) && ( t[FUNHEAD] == -SNUMBER )

```



```

01474      && ( t[1] >= ( FUNHEAD+6+ARGHEAD ) )
01475      && ( t[FUNHEAD+2] >= 4+ARGHEAD )
01476      && ( t[t[1]-1] == t[FUNHEAD+2+ARGHEAD]-1 ) ) ||
01477      ( ( t[FUNHEAD] > 0 )
01478      && ( t[FUNHEAD]-ARGHEAD-1 == ABS(t[FUNHEAD+t[FUNHEAD]-1]) )
01479      && ( t[FUNHEAD+t[FUNHEAD]]-ARGHEAD-1 == t[t[1]-1] ) ) ) {
01480  /*
01481      Check that the last (long) number is integer
01482  */
01483      WORD *ttt = t + t[1], iii, iiil;
01484      UWORD coefbuf[2], *coef2, ncoef2;
01485      iii = (ttt[-1]-1)/2;
01486      ttt -= iii;
01487      if ( ttt[-1] != 1 ) {
01488  exitfromhere:
01489          pcom[ncom++] = t;
01490          break;
01491      }
01492      iii--;
01493      for ( iiil = 0; iiil < iii; iiil++ ) {
01494          if ( ttt[iiil] != 0 ) goto exitfromhere;
01495      }
01496  /*
01497      Now we have a hit!
01498      The first argument will be put in lnum.
01499      It will be a rational.
01500      The second argument will be a long integer in coef2.
01501  */
01502      ttt = t + FUNHEAD;
01503      if ( *ttt < 0 ) {
01504          if ( ttt[1] < 0 ) {
01505              nnum = -1; lnum[0] = -ttt[1]; lnum[1] = 1;
01506          }
01507          else {
01508              nnum = 1; lnum[0] = ttt[1]; lnum[1] = 1;
01509          }
01510      }
01511      else {
01512          nnum = ABS(ttt[ttt[0]-1] - 1);
01513          for ( iii = 0; iii < nnum; iii++ ) {
01514              lnum[iii] = ttt[ARGHEAD+1+iii];
01515          }
01516          nnum = nnum/2;
01517          if ( ttt[ttt[0]-1] < 0 ) nnum = -nnum;
01518      }
01519      NEXTARG(ttt);
01520      if ( *ttt < 0 ) {
01521          coef2 = coefbuf;
01522          ncoef2 = 3; *coef2 = (UWORD) (ttt[1]);
01523          coef2[1] = 1;
01524      }
01525      else {
01526          coef2 = (UWORD *) (ttt+ARGHEAD+1);
01527          ncoef2 = (ttt[ttt[0]-1]-1)/2;
01528      }
01529      if ( TakeModulus((UWORD *)lnum,&nnum,(UWORD *)coef2,ncoef2,
01530                      UNPACK|NOINVERSES|FROMFUNCTION) ) {
01531          goto FromNorm;
01532      }
01533      if ( *t == MOD2FUNCTION && nnum > 0 ) {
01534          UWORD *coef3 = NumberMalloc("Mod2Function"), two = 2;
01535          WORD ncoef3;
01536          if ( Mullong((UWORD *)lnum,nnum,&two,1,coef3,&ncoef3) )
01537              goto FromNorm;
01538          if ( BigLong(coef3,ncoef3,(UWORD *)coef2,ncoef2) > 0 ) {
01539              nnum = -nnum;
01540              AddLong((UWORD *)lnum,nnum,(UWORD *)coef2,ncoef2
01541                      , (UWORD *)lnum,&nnum);
01542              nnum = -nnum;
01543          }
01544          NumberFree(coef3,"Mod2Function");
01545      }
01546  /*
01547      Do we have to pack? No, because the answer is not a fraction
01548  */
01549      ncoef = REDLENG(ncoef);
01550      if ( Mully(BHEAD,(UWORD *)n_coef,&ncoef,(UWORD *)lnum,nnum) )
01551          goto FromNorm;
01552      ncoef = INCLENG(ncoef);
01553  }
01554      else pcom[ncom++] = t;
01555      break;
01556  case EXTEUCLIDEAN:
01557      {
01558          WORD argcount = 0, *tc, *ts, xc, xs, *tcc;
01559          UWORD *Num1, *Num2, *Num3, *Num4;
01560          WORD size1, size2, size3, size4, space;

```

```

01561         tc = t+FUNHEAD; ts = t + t[1];
01562         while ( argcount < 3 && tc < ts ) { NEXTARG(tc); argcount++; }
01563         if ( argcount != 2 ) goto defaultcase;
01564         if ( t[FUNHEAD] == -SNUMBER ) {
01565             if ( t[FUNHEAD+1] <= 1 ) goto defaultcase;
01566             if ( t[FUNHEAD+2] == -SNUMBER ) {
01567                 if ( t[FUNHEAD+3] <= 1 ) goto defaultcase;
01568                 Num2 = NumberMalloc("modinverses");
01569                 *Num2 = t[FUNHEAD+3]; size2 = 1;
01570             }
01571             else {
01572                 if ( ts[-1] < 0 ) goto defaultcase;
01573                 if ( ts[-1] != t[FUNHEAD+2]-ARGHEAD-1 ) goto defaultcase;
01574                 xs = (ts[-1]-1)/2;
01575                 tcc = ts-xs-1;
01576                 if ( *tcc != 1 ) goto defaultcase;
01577                 for ( i = 1; i < xs; i++ ) {
01578                     if ( tcc[i] != 0 ) goto defaultcase;
01579                 }
01580                 Num2 = NumberMalloc("modinverses");
01581                 size2 = xs;
01582                 for ( i = 0; i < xs; i++ ) Num2[i] = t[FUNHEAD+ARGHEAD+3+i];
01583             }
01584             Num1 = NumberMalloc("modinverses");
01585             *Num1 = t[FUNHEAD+1]; size1 = 1;
01586         }
01587         else {
01588             tc = t + FUNHEAD + t[FUNHEAD];
01589             if ( tc[-1] < 0 ) goto defaultcase;
01590             if ( tc[-1] != t[FUNHEAD]-ARGHEAD-1 ) goto defaultcase;
01591             xc = (tc[-1]-1)/2;
01592             tcc = tc-xc-1;
01593             if ( *tcc != 1 ) goto defaultcase;
01594             for ( i = 1; i < xc; i++ ) {
01595                 if ( tcc[i] != 0 ) goto defaultcase;
01596             }
01597             if ( *tc == -SNUMBER ) {
01598                 if ( tc[1] <= 1 ) goto defaultcase;
01599                 Num2 = NumberMalloc("modinverses");
01600                 *Num2 = tc[1]; size2 = 1;
01601             }
01602             else {
01603                 if ( ts[-1] < 0 ) goto defaultcase;
01604                 if ( ts[-1] != t[FUNHEAD+2]-ARGHEAD-1 ) goto defaultcase;
01605                 xs = (ts[-1]-1)/2;
01606                 tcc = ts-xs-1;
01607                 if ( *tcc != 1 ) goto defaultcase;
01608                 for ( i = 1; i < xs; i++ ) {
01609                     if ( tcc[i] != 0 ) goto defaultcase;
01610                 }
01611                 Num2 = NumberMalloc("modinverses");
01612                 size2 = xs;
01613                 for ( i = 0; i < xs; i++ ) Num2[i] = tc[ARGHEAD+1+i];
01614             }
01615             Num1 = NumberMalloc("modinverses");
01616             size1 = xc;
01617             for ( i = 0; i < xc; i++ ) Num1[i] = t[FUNHEAD+ARGHEAD+1+i];
01618         }
01619         Num3 = NumberMalloc("modinverses");
01620         Num4 = NumberMalloc("modinverses");
01621         GetLongModInverses(BHEAD Num1,size1,Num2,size2
01622             ,Num3,&size3,Num4,&size4);
01623         /*
01624         Now we have to compose the answer. This needs more space
01625         and hence we have to put this inside the term.
01626         Compute first how much extra space we need.
01627         Then move the trailing part of the term upwards.
01628         Do not forget relevant pointers!!! (r, m, termout, AT.WorkPointer)
01629         */
01630         space = 0;
01631         if ( ( size3 == 1 || size3 == -1 ) && (*Num3&TOPBITONLY) == 0 ) space += 2;
01632         else space += ARGHEAD + 2*ABS(size3) + 2;
01633         if ( ( size4 == 1 || size4 == -1 ) && (*Num4&TOPBITONLY) == 0 ) space += 2;
01634         else space += ARGHEAD + 2*ABS(size4) + 2;
01635         tt = term + *term; u = tt + space;
01636         while ( tt >= ts ) *--u = *--tt;
01637         m += space; r += space;
01638         *term += space;
01639         t[1] += space;
01640         if ( ( size3 == 1 || size3 == -1 ) && (*Num3&TOPBITONLY) == 0 ) {
01641             *ts++ = -SNUMBER; *ts = (WORD) (*Num3);
01642             if ( size3 < 0 ) *ts = -*ts;
01643             ts++;
01644         }
01645         else {
01646             *ts++ = 2*ABS(size3)+ARGHEAD+2;
01647             *ts++ = 0; FILLARG(ts)

```

```

01648         *ts++ = 2*ABS(size3)+1;
01649         for ( i = 0; i < ABS(size3); i++ ) *ts++ = Num3[i];
01650         *ts++ = 1;
01651         for ( i = 1; i < ABS(size3); i++ ) *ts++ = 0;
01652         if ( size3 < 0 ) *ts++ = 2*size3-1;
01653         else *ts++ = 2*size3+1;
01654     }
01655     if ( ( size4 == 1 || size4 == -1 ) && (*Num4&TOPBITONLY) == 0 ) {
01656         *ts++ = -SNUMBER; *ts = *Num4;
01657         if ( size4 < 0 ) *ts = -*ts;
01658         ts++;
01659     }
01660     else {
01661         *ts++ = 2*ABS(size4)+ARGHEAD+2;
01662         *ts++ = 0; FILLARG(ts)
01663         *ts++ = 2*ABS(size4)+2;
01664         for ( i = 0; i < ABS(size4); i++ ) *ts++ = Num4[i];
01665         *ts++ = 1;
01666         for ( i = 1; i < ABS(size4); i++ ) *ts++ = 0;
01667         if ( size4 < 0 ) *ts++ = 2*size4-1;
01668         else *ts++ = 2*size4+1;
01669     }
01670     NumberFree(Num4,"modinverses");
01671     NumberFree(Num3,"modinverses");
01672     NumberFree(Num1,"modinverses");
01673     NumberFree(Num2,"modinverses");
01674     t[2] = 0; /* mark function as clean. */
01675     goto Restart;
01676 }
01677 break;
01678 case GCDFUNCTION:
01679 #ifdef EVALUATEGCD
01680 #ifdef NEWGCDFUNCTION
01681 {
01682 /*
01683      Has two integer arguments
01684      Four cases: S,S, S,L, L,S, L,L
01685 */
01686     WORD *num1, *num2, size1, size2, stor1, stor2, *ttt, ti;
01687     if ( t[1] == FUNHEAD+4 && t[FUNHEAD] == -SNUMBER
01688         && t[FUNHEAD+2] == -SNUMBER && t[FUNHEAD+1] != 0
01689         && t[FUNHEAD+3] != 0 ) { /* Short,Short */
01690         stor1 = t[FUNHEAD+1];
01691         stor2 = t[FUNHEAD+3];
01692         if ( stor1 < 0 ) stor1 = -stor1;
01693         if ( stor2 < 0 ) stor2 = -stor2;
01694         num1 = &stor1; num2 = &stor2;
01695         size1 = size2 = 1;
01696         goto gcdcalc;
01697     }
01698     else if ( t[1] > FUNHEAD+4 ) {
01699         if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] != 0
01700             && t[FUNHEAD+2] == t[1]-FUNHEAD-2 &&
01701             ABS(t[t[1]-1]) == t[FUNHEAD+2]-1-ARGHEAD ) { /* Short,Long */
01702             num2 = t + t[1];
01703             size2 = ABS(num2[-1]);
01704             ttt = num2-1;
01705             num2 -= size2;
01706             size2 = (size2-1)/2;
01707             ti = size2;
01708             while ( ti > 1 && ttt[-1] == 0 ) { ttt--; ti--; }
01709             if ( ti == 1 && ttt[-1] == 1 ) {
01710                 stor1 = t[FUNHEAD+1];
01711                 if ( stor1 < 0 ) stor1 = -stor1;
01712                 num1 = &stor1;
01713                 size1 = 1;
01714                 goto gcdcalc;
01715             }
01716             else pcom[ncom++] = t;
01717         }
01718         else if ( t[FUNHEAD] > 0 &&
01719             t[FUNHEAD]-1-ARGHEAD == ABS(t[t[FUNHEAD]+FUNHEAD-1]) ) {
01720             num1 = t + FUNHEAD + t[FUNHEAD];
01721             size1 = ABS(num1[-1]);
01722             ttt = num1-1;
01723             num1 -= size1;
01724             size1 = (size1-1)/2;
01725             ti = size1;
01726             while ( ti > 1 && ttt[-1] == 0 ) { ttt--; ti--; }
01727             if ( ti == 1 && ttt[-1] == 1 ) {
01728                 if ( t[1]-FUNHEAD == t[FUNHEAD]+2 && t[t[1]-2] == -SNUMBER
01729                     && t[t[1]-1] != 0 ) { /* Long,Short */
01730                     stor2 = t[t[1]-1];
01731                     if ( stor2 < 0 ) stor2 = -stor2;
01732                     num2 = &stor2;
01733                     size2 = 1;
01734                     goto gcdcalc;

```

```

01735     }
01736     else if ( t[1]-FUNHEAD == t[FUNHEAD]+t[FUNHEAD+t[FUNHEAD]]
01737     && ABS(t[t[1]-1]) == t[FUNHEAD+t[FUNHEAD]] - ARGHEAD-1 ) {
01738         num2 = t + t[1];
01739         size2 = ABS(num2[-1]);
01740         ttt = num2-1;
01741         num2 -= size2;
01742         size2 = (size2-1)/2;
01743         ti = size2;
01744         while ( ti > 1 && ttt[-1] == 0 ) { ttt--; ti--; }
01745         if ( ti == 1 && ttt[-1] == 1 ) {
01746 gcdcalc:         if ( GcdLong(BHEAD (UWORD *)num1,size1,(UWORD *)num2,size2
01747             , (UWORD *)lnum,&nnum) ) goto FromNorm;
01748             goto MulIn;
01749         }
01750         else pcom[ncom++] = t;
01751     }
01752     else pcom[ncom++] = t;
01753 }
01754     else pcom[ncom++] = t;
01755 }
01756     else pcom[ncom++] = t;
01757 }
01758 else pcom[ncom++] = t;
01759 }
01760 #else
01761 {
01762     WORD *gcd = AT.WorkPointer;
01763     if ( ( gcd = EvaluateGcd(BHEAD t) ) == 0 ) goto FromNorm;
01764     if ( *gcd == 4 && gcd[1] == 1 && gcd[2] == 1 && gcd[4] == 0 ) {
01765         AT.WorkPointer = gcd;
01766     }
01767     else if ( gcd[*gcd] == 0 ) {
01768         WORD *t1, iii, change, *num, *den, numsize, densize;
01769         if ( gcd[*gcd-1] < *gcd-1 ) {
01770             t1 = gcd+1;
01771             for ( iii = 2; iii < t1[1]; iii += 2 ) {
01772                 change = ExtraSymbol(t1[iii],t1[iii+1],nsym,ppsym,&ncoef);
01773                 nsym += change;
01774                 ppsym += change * 2;
01775             }
01776         }
01777         t1 = gcd + *gcd;
01778         iii = t1[-1]; num = t1-iii; numsize = (iii-1)/2;
01779         den = num + numsize; densize = numsize;
01780         while ( numsize > 1 && num[numsize-1] == 0 ) numsize--;
01781         while ( densize > 1 && den[densize-1] == 0 ) densize--;
01782         if ( numsize > 1 || num[0] != 1 ) {
01783             ncoef = REDLENG(ncoef);
01784             if ( MullY(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)num,numsize) ) goto
FromNorm;
01785             ncoef = INCLENG(ncoef);
01786         }
01787         if ( densize > 1 || den[0] != 1 ) {
01788             ncoef = REDLENG(ncoef);
01789             if ( DivvY(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)den,densize) ) goto
FromNorm;
01790             ncoef = INCLENG(ncoef);
01791         }
01792         AT.WorkPointer = gcd;
01793     }
01794     else { /* a whole expression */
01795 /*
01796         Action: Put the expression in a compiler buffer.
01797         Insert a SUBEXPRESSION subterm
01798         Set the return value of the routine such that in
01799         Generator the term gets sent again to TestSub.
01800
01801         1: put in C (ebufnum)
01802         2: after that the Workspace is free again.
01803         3: insert the SUBEXPRESSION
01804         4: copy the top part of the term down
01805 */
01806         LONG size = AT.WorkPointer - gcd;
01807
01808         ss = AddRHS(AT.ebufnum,1);
01809         while ( (ss + size + 10) > C->Top ) ss = DoubleCbuffer(AT.ebufnum,ss,13);
01810         tt = gcd;
01811         NCOPY(ss,tt,size);
01812         C->rhs[C->numrhs+1] = ss;
01813         C->Pointer = ss;
01814
01815         t[0] = SUBEXPRESSION;
01816         t[1] = SUBEXPSIZE;
01817         t[2] = C->numrhs;
01818         t[3] = 1;
01819         t[4] = AT.ebufnum;

```

```

01820             t += 5;
01821             tt = term + *term;
01822             while ( r < tt ) *t++ = *r++;
01823             *term = t - term;
01824
01825             regval = 1;
01826             goto RegEnd;
01827         }
01828     }
01829 #endif
01830 #else
01831     MesPrint(" Unexpected call to EvaluateGCD");
01832     Terminate(-1);
01833 #endif
01834     break;
01835 case MINFUNCTION:
01836 case MAXFUNCTION:
01837     if ( t[1] == FUNHEAD ) break;
01838     {
01839         WORD *ttt = t + FUNHEAD;
01840         WORD *tttstop = t + t[1];
01841         WORD tterm[4], iiii;
01842         while ( ttt < tttstop ) {
01843             if ( *ttt > 0 ) {
01844                 if ( ttt[ARGHEAD]-1 > ABS(ttt[*ttt-1]) ) goto nospec;
01845                 ttt += *ttt;
01846             }
01847             else {
01848                 if ( *ttt != -SNUMBER ) goto nospec;
01849                 ttt += 2;
01850             }
01851         }
01852         /*
01853         Function has only numerical arguments
01854         Pick up the first argument.
01855         */
01856         ttt = t + FUNHEAD;
01857         if ( *ttt > 0 ) {
01858             loadnew1:
01859             for ( iiii = 0; iiii < ttt[ARGHEAD]; iiii++ )
01860                 n_llnum[iiii] = ttt[ARGHEAD+iiii];
01861             ttt += *ttt;
01862         }
01863         else {
01864             loadnew2:
01865             if ( ttt[1] == 0 ) {
01866                 n_llnum[0] = n_llnum[1] = n_llnum[2] = n_llnum[3] = 0;
01867             }
01868             else {
01869                 n_llnum[0] = 4;
01870                 if ( ttt[1] > 0 ) { n_llnum[1] = ttt[1]; n_llnum[3] = 3; }
01871                 else { n_llnum[1] = -ttt[1]; n_llnum[3] = -3; }
01872                 n_llnum[2] = 1;
01873             }
01874             ttt += 2;
01875         }
01876         /*
01877         Now loop over the other arguments
01878         */
01879         while ( ttt < tttstop ) {
01880             if ( *ttt > 0 ) {
01881                 if ( n_llnum[0] == 0 ) {
01882                     if ( ( *t == MINFUNCTION && ttt[*ttt-1] < 0 )
01883                         || ( *t == MAXFUNCTION && ttt[*ttt-1] > 0 ) )
01884                         goto loadnew1;
01885                 }
01886                 else {
01887                     ttt += ARGHEAD;
01888                     iiii = CompCoef(n_llnum,ttt);
01889                     if ( ( iiii > 0 && *t == MINFUNCTION )
01890                         || ( iiii < 0 && *t == MAXFUNCTION ) ) {
01891                         for ( iiii = 0; iiii < ttt[0]; iiii++ )
01892                             n_llnum[iiii] = ttt[iiii];
01893                     }
01894                     ttt += *ttt;
01895                 }
01896             }
01897             else {
01898                 if ( n_llnum[0] == 0 ) {
01899                     if ( ( *t == MINFUNCTION && ttt[1] < 0 )
01900                         || ( *t == MAXFUNCTION && ttt[1] > 0 ) )
01901                         goto loadnew2;
01902                 }
01903                 else if ( ttt[1] == 0 ) {
01904                     if ( ( *t == MINFUNCTION && n_llnum[*n_llnum-1] > 0 )
01905                         || ( *t == MAXFUNCTION && n_llnum[*n_llnum-1] < 0 ) ) {
01906                         n_llnum[0] = 0;

```

```

01907         }
01908     }
01909     else {
01910         tterm[0] = 4; tterm[2] = 1;
01911         if ( ttt[1] < 0 ) { tterm[1] = -ttt[1]; tterm[3] = -3; }
01912         else { tterm[1] = ttt[1]; tterm[3] = 3; }
01913         iii = CompCoeef(n_llnum,tterm);
01914         if ( ( iii > 0 && *t == MINFUNCTION )
01915             || ( iii < 0 && *t == MAXFUNCTION ) ) {
01916             for ( iii = 0; iii < 4; iii++ )
01917                 n_llnum[iii] = tterm[iii];
01918         }
01919     }
01920     ttt += 2;
01921 }
01922 }
01923 if ( n_llnum[0] == 0 ) goto NormZero;
01924 ncoef = REDLENG(ncoef);
01925 nnum = REDLENG(n_llnum[*n_llnum-1]);
01926 if ( MulRat(BHEAD (UWORD *)n_coef,ncoef, (UWORD *)lnum,nnum,
01927 (UWORD *)n_coef,&ncoef) ) goto FromNorm;
01928 ncoef = INCLENG(ncoef);
01929 }
01930 break;
01931 case INVERSEFACTORIAL:
01932 if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] >= 0 ) {
01933     if ( Factorial(BHEAD t[FUNHEAD+1],(UWORD *)lnum,&nnum) )
01934         goto FromNorm;
01935     ncoef = REDLENG(ncoef);
01936     if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) ) goto FromNorm;
01937     ncoef = INCLENG(ncoef);
01938 }
01939 else {
01940 nospec:
01941     pcom[ncom++] = t;
01942 }
01943 break;
01944 case MAXPOWEROF:
01945 if ( ( t[FUNHEAD] == -SYMBOL )
01946     && ( t[FUNHEAD+1] > 0 ) && ( t[1] == FUNHEAD+2 ) ) {
01947     *(UWORD *)lnum = symbols[t[FUNHEAD+1]].maxpower;
01948     nnum = 1;
01949     goto MullIn;
01950 }
01951 else { pcom[ncom++] = t; }
01952 break;
01953 case MINPOWEROF:
01954 if ( ( t[FUNHEAD] == -SYMBOL )
01955     && ( t[FUNHEAD+1] > 0 ) && ( t[1] == FUNHEAD+2 ) ) {
01956     *(UWORD *)lnum = symbols[t[FUNHEAD+1]].minpower;
01957     nnum = 1;
01958     goto MullIn;
01959 }
01960 else { pcom[ncom++] = t; }
01961 break;
01962 case PRIMENUMBER :
01963 if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER
01964     && t[FUNHEAD+1] > 0 ) {
01965     UWORD xp = (UWORD)(NextPrime(BHEAD t[FUNHEAD+1]));
01966     ncoef = REDLENG(ncoef);
01967     if ( Mullly(BHEAD (UWORD *)n_coef,&ncoef,&xp,1) ) goto FromNorm;
01968     ncoef = INCLENG(ncoef);
01969 }
01970 else goto defaultcase;
01971 break;
01972 case MOEBIUS:
01973 /*
01974 Numerical function giving -1,0,1 or no evaluation
01975 */
01976 if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER
01977     && t[FUNHEAD+1] > 0 ) {
01978     WORD val = Moebius(BHEAD t[FUNHEAD+1]);
01979     if ( val == 0 ) goto NormZero;
01980     if ( val < 0 ) ncoef = -ncoef;
01981 }
01982 else {
01983     pcom[ncom++] = t;
01984 }
01985 break;
01986 case LNUMBER :
01987 ncoef = REDLENG(ncoef);
01988 if ( Mullly(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *) (t+3),t[2]) ) goto FromNorm;
01989 ncoef = INCLENG(ncoef);
01990 break;
01991 case SNUMBER :
01992 if ( t[2] < 0 ) {
01993     t[2] = -t[2];
01994     if ( t[3] & 1 ) ncoef = -ncoef;

```

```

01994         }
01995         else if ( t[2] == 0 ) {
01996             if ( t[3] < 0 ) goto NormInf;
01997             goto NormZero;
01998         }
01999         lnum[0] = t[2];
02000         nnum = 1;
02001         if ( t[3] && RaisPow(BHEAD (UWORD *)lnum,&nnum, (UWORD) (ABS(t[3]))) ) goto FromNorm;
02002         ncoef = REDLENG(ncoef);
02003         if ( t[3] < 0 ) {
02004             if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
02005                 goto FromNorm;
02006         }
02007         else if ( t[3] > 0 ) {
02008             if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
02009                 goto FromNorm;
02010         }
02011         ncoef = INCLENG(ncoef);
02012         break;
02013     case GAMMA :
02014     case GAMMAI :
02015     case GAMMAFIVE :
02016     case GAMMASIX :
02017     case GAMMASEVEN :
02018         if ( t[1] == FUNHEAD ) {
02019             MLOCK(ErrorMessageLock);
02020             MesPrint("Gamma matrix without spin line encountered.");
02021             MUNLOCK(ErrorMessageLock);
02022             goto NormMin;
02023         }
02024         pnco[nnco++] = t;
02025         t += FUNHEAD+1;
02026         goto ScanCont;
02027     case LEVICIVITA :
02028         peps[neps++] = t;
02029         if ( ( t[2] & DIRTYFLAG ) == DIRTYFLAG ) {
02030             t[2] &= ~DIRTYFLAG;
02031             t[2] |= DIRTYSYMFLAG;
02032         }
02033         t += FUNHEAD;
02034     ScanCont: while ( t < r ) {
02035         if ( *t >= AM.OffsetIndex &&
02036             ( *t >= AM.DumInd || ( *t < AM.WilInd &&
02037                 indices[*t-AM.OffsetIndex].dimension ) ) )
02038             pcon[ncon++] = t;
02039         t++;
02040     }
02041     break;
02042     case EXPONENT :
02043     {
02044         WORD *rr;
02045         k = 1;
02046         rr = t + FUNHEAD;
02047         if ( *rr == ARGHEAD || ( *rr == -SNUMBER && rr[1] == 0 ) )
02048             k = 0;
02049         if ( *rr == -SNUMBER && rr[1] == 1 ) break;
02050         if ( *rr <= -FUNCTION ) k = *rr;
02051         NEXTARG(rr)
02052         if ( *rr == ARGHEAD || ( *rr == -SNUMBER && rr[1] == 0 ) ) {
02053             if ( k == 0 ) goto NormZZ;
02054             break;
02055         }
02056         if ( *rr == -SNUMBER && rr[1] > 0 && rr[1] < MAXPOWER && k < 0 ) {
02057             k = -k;
02058             if ( functions[k-FUNCTION].commute ) {
02059                 for ( i = 0; i < rr[1]; i++ ) pnco[nnco++] = rr-1;
02060             }
02061             else {
02062                 for ( i = 0; i < rr[1]; i++ ) pcom[ncom++] = rr-1;
02063             }
02064             break;
02065         }
02066         if ( k == 0 ) goto NormZero;
02067         if ( t[FUNHEAD] == -SYMBOL && *rr == -SNUMBER && t[1] == FUNHEAD+4 ) {
02068             if ( rr[1] < MAXPOWER ) {
02069                 t[FUNHEAD+2] = t[FUNHEAD+1]; t += FUNHEAD+2;
02070                 from = m;
02071                 goto NextSymbol;
02072             }
02073         }
02074     /*
02075         if ( ( t[FUNHEAD] > 0 && t[FUNHEAD+1] != 0 )
02076             || ( *rr > 0 && rr[1] != 0 ) ) {}
02077     else
02078     */
02079         t[2] &= ~DIRTYSYMFLAG;
02080

```

```

02081         pnco[ncco++] = t;
02082     }
02083     break;
02084 case DENOMINATOR :
02085     t[2] &= ~DIRTYSYMFLAG;
02086     pden[nden++] = t;
02087     pnco[ncco++] = t;
02088     break;
02089 case INDEX :
02090     t += 2;
02091     do {
02092         if ( *t == 0 || *t == AM.vectorzero ) goto NormZero;
02093         if ( *t > 0 && *t < AM.OffsetIndex ) {
02094             lnum[0] = *t++;
02095             nnum = 1;
02096             ncoef = REDLENG(ncoef);
02097             if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)lnum,nnum) )
02098                 goto FromNorm;
02099             ncoef = INCLENG(ncoef);
02100         }
02101         else if ( *t == NOINDEX ) t++;
02102         else pind[nind++] = *t++;
02103     } while ( t < r );
02104     break;
02105 case SUBEXPRESSION :
02106     if ( t[3] == 0 ) break;
02107 case EXPRESSION :
02108     goto RegEnd;
02109 case ROOTFUNCTION :
02110 /*
02111     Tries to take the n-th root inside the rationals
02112     If this is not possible, it clears all flags and
02113     hence tries no more.
02114     Notation:
02115     root_(power(=integer),(rational)number)
02116 */
02117     { WORD nc;
02118     if ( t[2] == 0 ) goto defaultcase;
02119     if ( t[FUNHEAD] != -SNUMBER || t[FUNHEAD+1] < 0 ) goto defaultcase;
02120     if ( t[FUNHEAD+2] == -SNUMBER ) {
02121         if ( t[FUNHEAD+1] == 0 && t[FUNHEAD+3] == 0 ) goto NormZZ;
02122         if ( t[FUNHEAD+1] == 0 ) break;
02123         if ( t[FUNHEAD+3] < 0 ) {
02124             AT.WorkPointer[0] = -t[FUNHEAD+3];
02125             nc = -1;
02126         }
02127         else {
02128             AT.WorkPointer[0] = t[FUNHEAD+3];
02129             nc = 1;
02130         }
02131         AT.WorkPointer[1] = 1;
02132     }
02133     else if ( t[FUNHEAD+2] == t[1]-FUNHEAD-2
02134     && t[FUNHEAD+2] == t[FUNHEAD+2+ARGHEAD]+ARGHEAD
02135     && ABS(t[t[1]-1]) == t[FUNHEAD+2+ARGHEAD] - 1 ) {
02136         WORD *r1, *r2;
02137         if ( t[FUNHEAD+1] == 0 ) break;
02138         i = t[t[1]-1]; r1 = t + FUNHEAD+ARGHEAD+3;
02139         nc = REDLENG(i);
02140         i = ABS(i) - 1;
02141         r2 = AT.WorkPointer;
02142         while ( --i >= 0 ) *r2++ = *r1++;
02143     }
02144     else goto defaultcase;
02145     if ( TakeRatRoot((UWORD *)AT.WorkPointer,&nc,t[FUNHEAD+1]) ) {
02146         t[2] = 0;
02147         goto defaultcase;
02148     }
02149     ncoef = REDLENG(ncoef);
02150     if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)AT.WorkPointer,nc) )
02151         goto FromNorm;
02152     if ( nc < 0 ) nc = -nc;
02153     if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *) (AT.WorkPointer+nc),nc) )
02154         goto FromNorm;
02155     ncoef = INCLENG(ncoef);
02156     }
02157     break;
02158 case RANDOMFUNCTION :
02159     {
02160     WORD nnc, nc, nca, nr;
02161     UWORD xx;
02162 /*
02163     Needs one positive integer argument.
02164     returns (wranf()%argument)+1.
02165     We may call wranf several times to paste UWORDS together
02166     when we need long numbers.
02167     We make little errors when taking the % operator

```



```

02168                (not 100% uniform). We correct for that by redoing the
02169                calculation in the (unlikely) case that we are in leftover area
02170 */
02171         if ( t[1] == FUNHEAD ) goto defaultcase;
02172         if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -SNUMBER &&
02173             t[FUNHEAD+1] > 0 ) {
02174             if ( t[FUNHEAD+1] == 1 ) break;
02175         redoshort:
02176             ((UWORD *)AT.WorkPointer)[0] = wranf(BHEAD0);
02177             ((UWORD *)AT.WorkPointer)[1] = wranf(BHEAD0);
02178             nr = 2;
02179             if ( ((UWORD *)AT.WorkPointer)[1] == 0 ) {
02180                 nr = 1;
02181                 if ( ((UWORD *)AT.WorkPointer)[0] == 0 ) {
02182                     nr = 0;
02183                 }
02184             }
02185             xx = (UWORD) (t[FUNHEAD+1]);
02186             if ( nr ) {
02187                 DivLong((UWORD *)AT.WorkPointer,nr
02188                     ,&xx,1
02189                     ,((UWORD *)AT.WorkPointer)+4,&nnc
02190                     ,((UWORD *)AT.WorkPointer)+2,&nca);
02191                 ((UWORD *)AT.WorkPointer)[4] = 0;
02192                 ((UWORD *)AT.WorkPointer)[5] = 0;
02193                 ((UWORD *)AT.WorkPointer)[6] = 1;
02194                 DivLong((UWORD *)AT.WorkPointer+4,3
02195                     ,&xx,1
02196                     ,((UWORD *)AT.WorkPointer)+9,&nnc
02197                     ,((UWORD *)AT.WorkPointer)+7,&nca);
02198                 AddLong((UWORD *)AT.WorkPointer+4,3
02199                     ,((UWORD *)AT.WorkPointer)+7,-nca
02200                     ,((UWORD *)AT.WorkPointer)+9,&nnc);
02201                 if ( BigLong((UWORD *)AT.WorkPointer,nr
02202                     ,((UWORD *)AT.WorkPointer)+9,nnc) >= 0 ) goto redoshort;
02203             }
02204             else nc = 0;
02205             if ( nc == 0 ) {
02206                 AT.WorkPointer[2] = (WORD)xx;
02207                 nc = 1;
02208             }
02209             ncoef = REDLENG(ncoef);
02210             if ( Mully(BHEAD (UWORD *)n_coef,&ncoef,((UWORD *)AT.WorkPointer))+2,nc) )
02211                 goto FromNorm;
02212             ncoef = INCLENG(ncoef);
02213         }
02214         else if ( t[FUNHEAD] > 0 && t[1] == t[FUNHEAD]+FUNHEAD
02215             && ABS(t[t[1]-1]) == t[FUNHEAD]-1-ARGHEAD && t[t[1]-1] > 0 ) {
02216             WORD nna, nnb, nni, nnb2, nnb2a;
02217             UWORD *nnt;
02218             nna = t[t[1]-1];
02219             nnb2 = nna-1;
02220             nnb = nnb2/2;
02221             nnt = (UWORD *) (t+t[1]-1-nnb); /* start of denominator */
02222             if ( *nnt != 1 ) goto defaultcase;
02223             for ( nni = 1; nni < nnb; nni++ ) {
02224                 if ( nnt[nni] != 0 ) goto defaultcase;
02225             }
02226             nnt = (UWORD *) (t + FUNHEAD + ARGHEAD + 1);
02227
02228             for ( nni = 0; nni < nnb2; nni++ ) {
02229                 ((UWORD *)AT.WorkPointer)[nni] = wranf(BHEAD0);
02230             }
02231             nnb2a = nnb2;
02232             while ( nnb2a > 0 && ((UWORD *)AT.WorkPointer)[nnb2a-1] == 0 ) nnb2a--;
02233             if ( nnb2a > 0 ) {
02234                 DivLong((UWORD *)AT.WorkPointer,nnb2a
02235                     ,nnt,nnb
02236                     ,((UWORD *)AT.WorkPointer)+2*nnb2,&nnc
02237                     ,((UWORD *)AT.WorkPointer)+nnb2,&nca);
02238                 for ( nni = 0; nni < nnb2; nni++ ) {
02239                     ((UWORD *)AT.WorkPointer)[nni+2*nnb2] = 0;
02240                 }
02241                 ((UWORD *)AT.WorkPointer)[3*nnb2] = 1;
02242                 DivLong((UWORD *)AT.WorkPointer+2*nnb2,nnb2+1
02243                     ,nnt,nnb
02244                     ,((UWORD *)AT.WorkPointer)+4*nnb2+1,&nnc
02245                     ,((UWORD *)AT.WorkPointer)+3*nnb2+1,&nca);
02246                 AddLong((UWORD *)AT.WorkPointer+2*nnb2,nnb2+1
02247                     ,((UWORD *)AT.WorkPointer)+3*nnb2+1,-nca
02248                     ,((UWORD *)AT.WorkPointer)+4*nnb2+1,&nnc);
02249                 if ( BigLong((UWORD *)AT.WorkPointer,nnb2a
02250                     ,((UWORD *)AT.WorkPointer)+4*nnb2+1,nnc) >= 0 ) goto redoshort;
02251             }
02252             else nc = 0;
02253             if ( nc == 0 ) {
02254                 for ( nni = 0; nni < nnb; nni++ ) {

```

```

02255             ((UWORD *)AT.WorkPointer)[nnb2+nni] = nnt[nni];
02256         }
02257         nc = nnb;
02258     }
02259     ncoef = REDLENG(ncoef);
02260     if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, ((UWORD *) (AT.WorkPointer))+nnb2,nc) )
02261         goto FromNorm;
02262     ncoef = INCLENG(ncoef);
02263 }
02264 else goto defaultcase;
02265 }
02266 break;
02267 case RANPERM :
02268     if ( *t == RANPERM && t[1] > FUNHEAD && t[FUNHEAD] <= -FUNCTION ) {
02269         WORD **pwork;
02270         WORD *mm, *ww, *ow = AT.WorkPointer;
02271         WORD *Array, *targ, *argstop, nargs = 0, itot;
02272         int ie;
02273         argstop = t+t[1];
02274         targ = t+FUNHEAD+1;
02275         while ( targ < argstop ) {
02276             nargs++; NEXTARG(targ);
02277         }
02278         WantAddPointers(nargs);
02279         pwork = AT.pWorkSpace + AT.pWorkPointer;
02280         targ = t+FUNHEAD+1; nargs = 0;
02281         while ( targ < argstop ) {
02282             pwork[nargs++] = targ;
02283             NEXTARG(targ);
02284         }
02285         /*
02286         Make a random permutation of the numbers 0,...,narg-1
02287         The following code works also for nargs == 0 and nargs == 1
02288         */
02289         ow = AT.WorkPointer;
02290         Array = AT.WorkPointer;
02291         AT.WorkPointer += nargs;
02292         for ( i = 0; i < nargs; i++ ) Array[i] = i;
02293         for ( i = 2; i <= nargs; i++ ) {
02294             itot = (WORD) (iranf(BHEAD i));
02295             for ( j = 0; j < itot; j++ ) CYCLE1(WORD,Array,i)
02296         }
02297         mm = AT.WorkPointer;
02298         *mm++ = -t[FUNHEAD];
02299         *mm++ = t[1] - 1;
02300         for ( ie = 2; ie < FUNHEAD; ie++ ) *mm++ = t[ie];
02301         for ( i = 0; i < nargs; i++ ) {
02302             ww = pwork[Array[i]];
02303             CopyArg(mm,ww);
02304         }
02305         mm = AT.WorkPointer; t++; ww = t;
02306         i = mm[1]; NCOPY(ww,mm,i)
02307         AT.WorkPointer = ow;
02308         goto TryAgain;
02309     }
02310     pnco[nnco++] = t;
02311     break;
02312 case PUTFIRST : /* First argument should be a function, second a number */
02313     if ( ( t[2] & DIRTYFLAG ) != 0 && t[FUNHEAD] <= -FUNCTION
02314         && t[FUNHEAD+1] == -SNUMBER && t[FUNHEAD+2] > 0 ) {
02315         WORD *rr = t+t[1], *mm = t+FUNHEAD+3, *tt, *ttl, *tt2, num = 0;
02316         /*
02317         now count the arguments. If not enough: no action.
02318         */
02319         while ( mm < rr ) { num++; NEXTARG(mm); }
02320         if ( num < t[FUNHEAD+2] ) { pnco[nnco++] = t; break; }
02321         /* Replace "putfirst_" with the resulting function code. mm goes to arg start. */
02322         *t = -t[FUNHEAD]; mm = t+FUNHEAD+3;
02323         /* Set i to the arg number we are putting first, then move mm to its start. */
02324         i = t[FUNHEAD+2];
02325         while ( --i > 0 ) { NEXTARG(mm); }
02326         /* Keep a pointer to the arguments trailing the selected: */
02327         WORD *argTail = mm;
02328         NEXTARG(argTail);
02329         tt = TermMalloc("Select_"); /* Move selected out of the way into tmp space */
02330         ttl = tt;
02331         /* Normal argument: */
02332         if ( *mm > 0 ) {
02333             for ( i = 0; i < *mm; i++ ) *ttl++ = mm[i];
02334         }
02335         /* Fast-notation function: single word */
02336         else if ( *mm <= -FUNCTION ) { *ttl++ = *mm; }
02337         /* Fast-notation symbol, number etc: two words */
02338         else { *ttl++ = mm[0]; *ttl++ = mm[1]; }
02339         /* Put tt2 at the start of the original arguments */
02340         tt2 = t+FUNHEAD+3;
02341         /* Copy leading original arguments after the new first, in the tmp space. */

```

```

02342         while ( tt2 < mm ) *tt1++ = *tt2++;
02343         /* i contains the size so far. tt1 goes to the start of the tmp space.
02344            tt2 to the final argument location (we overwrite "putfirst_") */
02345         i = tt1-tt; tt1 = tt; tt2 = t+FUNHEAD;
02346         /* Copy everything so far to its final place */
02347         NCOPY(tt2,tt1,i);
02348         /* We are finished with the tmp space */
02349         TermFree(tt,"Select_");
02350         /* Now copy the trailing args. Use the stored pointer, *mm has been edited
02351            during the copy to tt2 above! NEXTARG(mm) would produce nonsense. */
02352         while ( argTail < rr ) *tt2++ = *argTail++;
02353         /* Set the size of all function args */
02354         t[1] = tt2 - t;
02355         /* Now copy the rest of the term, and set the final term size */
02356         rr = term + *term;
02357         while ( argTail < rr ) *tt2++ = *argTail++;
02358         *term = tt2-term;
02359         if ( functions[*t-FUNCTION].spec == TENSORFUNCTION ) {
02360             // If the output function is a tensor, we have one more job to do.
02361             // The args are formatted as single words, representing indices or vectors.
02362             // There is no ARGHEAD.
02363             WORD *dst = t + FUNHEAD;
02364             WORD *src = dst + 1;
02365             // Strip the type information from the args:
02366             while ( src < t + t[1] ) {
02367                 *dst = *src;
02368                 dst++; src++;
02369             }
02370             t[1] = dst - t;
02371             // Now copy the rest of the term. We've advanced src one too many above.
02372             src--;
02373             while ( src < term + *term ) {
02374                 *dst++ = *src++;
02375             }
02376             *term = dst - term;
02377         }
02378         goto Restart;
02379     }
02380     else pnco[nnco++] = t;
02381     break;
02382 #ifdef WITHFLOAT
02383     case FLOATFUN :
02384     /*
02385         If it is a proper float_ we give it special treatment.
02386         If it is not proper, we treat it as a regular commuting function.
02387     */
02388     if ( withfloat == 0 ) {
02389         if ( TestFloat(t) == 0 ) goto defaultcase;
02390         firstfloat = t;
02391         withfloat = 1;
02392     }
02393     else { /* There are now at least two float_'s. Time for action. */
02394         if ( TestFloat(t) == 0 ) goto defaultcase;
02395         if ( withfloat == 1 ) UnpackFloat(aux4,firstfloat);
02396         withfloat++;
02397         UnpackFloat(aux5,t);
02398         mpf_mul(aux4,aux4,aux5);
02399     }
02400     break;
02401 #endif
02402     case INTFUNCTION :
02403     /*
02404         Can be resolved if the first argument is a number
02405         and the second argument either doesn't exist or has
02406         the value +1, 0, -1
02407         +1 : rounding up
02408         0  : rounding towards zero
02409         -1 : rounding down (same as no argument)
02410     */
02411     if ( t[1] <= FUNHEAD ) break;
02412     {
02413         WORD *rr, den, num;
02414         to = t + FUNHEAD;
02415         if ( *to > 0 ) {
02416             if ( *to == ARGHEAD ) goto NormZero;
02417             rr = to + *to;
02418             i = rr[-1];
02419             j = ABS(i);
02420             if ( to[ARGHEAD] != j+1 ) goto NoInteg;
02421             if ( rr >= r ) k = -1;
02422             else if ( *rr == ARGHEAD ) { k = 0; rr += ARGHEAD; }
02423             else if ( *rr == -SNUMBER ) { k = rr[1]; rr += 2; }
02424             else goto NoInteg;
02425             if ( rr != r ) goto NoInteg;
02426             if ( k > 1 || k < -1 ) goto NoInteg;
02427             to += ARGHEAD+1;
02428             j = (j-1) >> 1;

```

```

02429         i = ( i < 0 ) ? -j: j;
02430         UnPack((UWORD *)to,i,&den,&num);
02431     /*
02432         Potentially the use of NoScrat2 is unsafe.
02433         It makes the routine not reentrant, but because it is
02434         used only locally and because we only call the
02435         low level routines DivLong and AddLong which never
02436         make calls involving Normalize, things are OK after all
02437     */
02438     if ( AN.NoScrat2 == 0 ) {
02439         AN.NoScrat2 = (UWORD *)Malloc1((AM.MaxTal+2)*sizeof(UWORD),"Normalize");
02440     }
02441     if ( DivLong((UWORD *)to,num,(UWORD *) (to+j),den
02442 , (UWORD *)AT.WorkPointer,&num,AN.NoScrat2,&den) ) goto FromNorm;
02443     if ( k < 0 && den < 0 ) {
02444         *AN.NoScrat2 = 1;
02445         den = -1;
02446         if ( AddLong((UWORD *)AT.WorkPointer,num
02447 ,AN.NoScrat2,den,(UWORD *)AT.WorkPointer,&num) )
02448             goto FromNorm;
02449     }
02450     else if ( k > 0 && den > 0 ) {
02451         *AN.NoScrat2 = 1;
02452         den = 1;
02453         if ( AddLong((UWORD *)AT.WorkPointer,num,
02454 AN.NoScrat2,den,(UWORD *)AT.WorkPointer,&num) )
02455             goto FromNorm;
02456     }
02457 }
02458 else if ( *to == -SNUMBER ) { /* No rounding needed */
02459     if ( to[1] < 0 ) { *AT.WorkPointer = -to[1]; num = -1; }
02460     else if ( to[1] == 0 ) goto NormZero;
02461     else { *AT.WorkPointer = to[1]; num = 1; }
02462 }
02463 else goto NoInteg;
02464 if ( num == 0 ) goto NormZero;
02465 ncoef = REDLENG(ncoef);
02466 if ( Mully(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)AT.WorkPointer,num) )
02467     goto FromNorm;
02468 ncoef = INCLENG(ncoef);
02469 break;
02470 }
02471 }
02472 NoInteg;;
02473 /*
02474     Fall through if it cannot be resolved
02475 */
02476     default :
02477 defaultcase;;
02478     if ( *t < FUNCTION ) {
02479         MLOCK(ErrorMessageLock);
02480         MesPrint("Illegal code in Norm");
02481 #ifdef DEBUGON
02482     {
02483         UBYTE OutBuf[140];
02484         AO.OutFill = AO.OutputLine = OutBuf;
02485         t = term;
02486         AO.OutSkip = 3;
02487         FiniLine();
02488         i = *t;
02489         while ( --i >= 0 ) {
02490             TalToLine((UWORD) (*t++));
02491             TokenToLine((UBYTE *) " ");
02492         }
02493         AO.OutSkip = 0;
02494         FiniLine();
02495     }
02496 #endif
02497     MUNLOCK(ErrorMessageLock);
02498     goto NormMin;
02499 }
02500 if ( *t == REPLACEMENT ) {
02501     if ( AR.Eside != LHSIDE ) ReplaceVeto--;
02502     pcom[ncom++] = t;
02503     break;
02504 }
02505 /*
02506     if ( *t == AM.termfunnum && t[1] == FUNHEAD+2
02507     && t[FUNHEAD] == -DOLLAREXPRESSION ) termflag++;
02508 */
02509     if ( *t == DUMMYFUN || *t == DUMMYTEN ) {}
02510     else {
02511         if ( *t < (FUNCTION + WILDOFFSET) ) {
02512             if ( ( functions[*t-FUNCTION].maxnumargs > 0 )
02513                 || ( functions[*t-FUNCTION].minnumargs > 0 ) )
02514                 && ( t[2] & DIRTYFLAG ) != 0 ) {
02515                 /*

```

```

02516                                     Number of arguments is bounded. And we have not checked.
02517 */
02518                                     WORD *ta = t + FUNHEAD, *tb = t + t[1];
02519                                     int numarg = 0;
02520                                     while ( ta < tb ) { numarg++; NEXTARG(ta) }
02521                                     if ( ( functions[*t-FUNCTION].maxnumargs > 0 )
02522                                         && ( numarg >= functions[*t-FUNCTION].maxnumargs ) )
02523                                         goto NormZero;
02524                                     if ( ( functions[*t-FUNCTION].minnumargs > 0 )
02525                                         && ( numarg < functions[*t-FUNCTION].minnumargs ) )
02526                                         goto NormZero;
02527                                     }
02528 doflags:
02529                                     if ( ( ( t[2] & DIRTYFLAG ) != 0 ) && ( functions[*t-FUNCTION].tabl == 0 ) ) {
02530                                         t[2] &= ~DIRTYFLAG;
02531                                         t[2] |= DIRTYSYMFLAG;
02532                                     }
02533                                     if ( functions[*t-FUNCTION].commute ) { pnco[ncco++] = t; }
02534                                     else { pcom[ncom++] = t; }
02535                                     }
02536                                     else {
02537                                         if ( ( ( t[2] & DIRTYFLAG ) != 0 ) && ( functions[*t-FUNCTION-WILDOFFSET].tabl
== 0 ) ) {
02538                                             t[2] &= ~DIRTYFLAG;
02539                                             t[2] |= DIRTYSYMFLAG;
02540                                         }
02541                                         if ( functions[*t-FUNCTION-WILDOFFSET].commute ) {
02542                                             pnco[ncco++] = t;
02543                                         }
02544                                         else { pcom[ncom++] = t; }
02545                                     }
02546                                     }
02547
02548 /* Now hunt for contractible indices */
02549
02550 if ( ( *t < (FUNCTION + WILDOFFSET)
02551     && functions[*t-FUNCTION].spec >= TENSORFUNCTION ) || (
02552     *t >= (FUNCTION + WILDOFFSET)
02553     && functions[*t-FUNCTION-WILDOFFSET].spec >= TENSORFUNCTION ) ) {
02554     if ( *t >= GAMMA && *t <= GAMMASEVEN ) t++;
02555     t += FUNHEAD;
02556     while ( t < r ) {
02557         if ( *t == AM.vectorzero ) goto NormZero;
02558         if ( *t >= AM.OffsetIndex && ( *t >= AM.DumInd
02559             || ( *t < AM.WilInd && indices[*t-AM.OffsetIndex].dimension ) ) ) {
02560             pcon[ncon++] = t;
02561         }
02562         else if ( *t == FUNNYWILD ) { t++; }
02563         t++;
02564     }
02565 }
02566 else {
02567     t += FUNHEAD;
02568     while ( t < r ) {
02569         if ( *t > 0 ) {
02570 /*
02571                                     Here we should worry about a recursion
02572                                     A problem is the possibility of a construct
02573                                     like f(mu+nu)
02574 */
02575                                     t += *t;
02576                                 }
02577                                 else if ( *t <= -FUNCTION ) t++;
02578                                 else if ( *t == -INDEX ) {
02579                                     if ( t[1] >= AM.OffsetIndex &&
02580                                         ( t[1] >= AM.DumInd || ( t[1] < AM.WilInd
02581                                             && indices[t[1]-AM.OffsetIndex].dimension ) ) )
02582                                         pcon[ncon++] = t+1;
02583                                     t += 2;
02584                                 }
02585                                 else if ( *t == -SYMBOL ) {
02586                                     if ( t[1] >= MAXPOWER && t[1] < 2*MAXPOWER ) {
02587                                         *t = -SNUMBER;
02588                                         t[1] -= MAXPOWER;
02589                                     }
02590                                     else if ( t[1] < -MAXPOWER && t[1] > -2*MAXPOWER ) {
02591                                         *t = -SNUMBER;
02592                                         t[1] += MAXPOWER;
02593                                     }
02594                                     else t += 2;
02595                                 }
02596                                 else t += 2;
02597                             }
02598                         }
02599                     break;
02600 }
02601 t = r;

```

```

02602 TryAgain;;
02603     } while ( t < m );
02604     if ( ANsc ) {
02605         AN.cTerm = ANsc;
02606         r = t = ANsr; m = ANsm;
02607         ANsc = ANsm = ANsr = 0;
02608         goto conscan;
02609     }
02610 /*
02611 #] First scan :
02612 #[ Easy denominators :
02613
02614 Easy denominators are denominators that can be replaced by
02615 negative powers of individual subterms. This may add to all
02616 our sublists.
02617
02618 */
02619     if ( nden ) {
02620         for ( k = 0, i = 0; i < nden; i++ ) {
02621             t = pden[i];
02622             if ( ( t[2] & DIRTYFLAG ) == 0 ) continue;
02623             r = t + t[1]; m = t + FUNHEAD;
02624             if ( m >= r ) {
02625                 for ( j = i+1; j < nden; j++ ) pden[j-1] = pden[j];
02626                 nden--;
02627                 for ( j = 0; j < nnco; j++ ) if ( pnco[j] == t ) break;
02628                 for ( j++; j < nnco; j++ ) pnco[j-1] = pnco[j];
02629                 nnco--;
02630                 i--;
02631             }
02632             else {
02633                 NEXTARG(m);
02634                 if ( m >= r ) continue;
02635             /*
02636                 We have more than one argument. Split the function.
02637             */
02638                 if ( k == 0 ) {
02639                     k = 1; to = termout; from = term;
02640                 }
02641                 while ( from < t ) *to++ = *from++;
02642                 m = t + FUNHEAD;
02643                 while ( m < r ) {
02644                     stop = to;
02645                     *to++ = DENOMINATOR;
02646                     for ( j = 1; j < FUNHEAD; j++ ) *to++ = 0;
02647                     if ( *m < -FUNCTION ) *to++ = *m++;
02648                     else if ( *m < 0 ) { *to++ = *m++; *to++ = *m++; }
02649                     else {
02650                         j = *m; while ( --j >= 0 ) *to++ = *m++;
02651                     }
02652                     stop[1] = WORDDIF(to,stop);
02653                 }
02654                 from = r;
02655                 if ( i == nden - 1 ) {
02656                     stop = term + *term;
02657                     while ( from < stop ) *to++ = *from++;
02658                     i = *termout = WORDDIF(to,termout);
02659                     to = term; from = termout;
02660                     while ( --i >= 0 ) *to++ = *from++;
02661                     goto Restart;
02662                 }
02663             }
02664         }
02665         for ( i = 0; i < nden; i++ ) {
02666             t = pden[i];
02667             if ( ( t[2] & DIRTYFLAG ) == 0 ) continue;
02668             t[2] = 0;
02669             if ( t[FUNHEAD] == -SYMBOL ) {
02670                 WORD change;
02671                 t += FUNHEAD+1;
02672                 change = ExtraSymbol(*t,-1,nsym,ppsym,&ncoef);
02673                 nsym += change;
02674                 ppsym += change * 2;
02675                 goto DropDen;
02676             }
02677             else if ( t[FUNHEAD] == -SNUMBER ) {
02678                 t += FUNHEAD+1;
02679                 if ( *t == 0 ) goto NormInf;
02680                 if ( *t < 0 ) { *AT.WorkPointer = -*t; j = -1; }
02681                 else { *AT.WorkPointer = *t; j = 1; }
02682                 ncoef = REDLENG(ncoef);
02683                 if ( Divvy(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)AT.WorkPointer,j) )
02684                     goto FromNorm;
02685                 ncoef = INCLENG(ncoef);
02686                 goto DropDen;
02687             }
02688             else if ( t[FUNHEAD] == ARGHEAD ) goto NormInf;

```

```

02689         else if ( t[FUNHEAD] > 0 && t[FUNHEAD+ARGHEAD] ==
02690 t[FUNHEAD]-ARGHEAD ) {
02691             /* Only one term */
02692             r = t + t[1] - 1;
02693             t += FUNHEAD + ARGHEAD + 1;
02694             j = *r;
02695             m = r - ABS(*r) + 1;
02696             if ( j != 3 || ( ( *m != 1 ) || ( m[1] != 1 ) ) ) {
02697                 ncoef = REDLENG(ncoef);
02698                 if ( DivRat(BHEAD (UWORD *)n_coef,ncoef, (UWORD *)m,REDLENG(j), (UWORD
*)n_coef,&ncoef) ) goto FromNorm;
02699                 ncoef = INCLENG(ncoef);
02700                 j = ABS(j) - 3;
02701                 t[-FUNHEAD-ARGHEAD] -= j;
02702                 t[-ARGHEAD-1] -= j;
02703                 t[-1] -= j;
02704                 m[0] = m[1] = 1;
02705                 m[2] = 3;
02706             }
02707             while ( t < m ) {
02708                 r = t + t[1];
02709                 if ( *t == SYMBOL || *t == DOTPRODUCT ) {
02710                     k = t[1];
02711                     pden[i][1] -= k;
02712                     pden[i][FUNHEAD] -= k;
02713                     pden[i][FUNHEAD+ARGHEAD] -= k;
02714                     m -= k;
02715                     stop = m + 3;
02716                     tt = to = t;
02717                     from = r;
02718                     if ( *t == SYMBOL ) {
02719                         t += 2;
02720                         while ( t < r ) {
02721                             WORD change;
02722                             change = ExtraSymbol(*t,-t[1],nsym,ppsym,&ncoef);
02723                             nsym += change;
02724                             ppsym += change * 2;
02725                             t += 2;
02726                         }
02727                     }
02728                     else {
02729                         t += 2;
02730                         while ( t < r ) {
02731                             *ppdot++ = *t++;
02732                             *ppdot++ = *t++;
02733                             *ppdot++ = -*t++;
02734                             ndot++;
02735                         }
02736                     }
02737                     while ( to < stop ) *to++ = *from++;
02738                     r = tt;
02739                 }
02740 #ifdef WITHFLOAT
02741                 else if ( *t == FLOATFUN && TestFloat(t) ) {
02742                     k = t[1];
02743                     pden[i][1] -= k;
02744                     pden[i][FUNHEAD] -= k;
02745                     pden[i][FUNHEAD+ARGHEAD] -= k;
02746                     UnpackFloat(aux5,t);
02747                     if ( withfloat == 0 ) {
02748                         mpf_ui_div(aux4,1,aux5);
02749                         withfloat = 2;
02750                     }
02751                     else {
02752                         if ( withfloat == 1 ) UnpackFloat(aux4,firstfloat);
02753                         mpf_div(aux4,aux4,aux5);
02754                         withfloat++;
02755                     }
02756                     tt = to = t;
02757                     while ( r < m ) *to++ = *r++;
02758                     *to++ = 1; *to++ = 1; *to++ = 3;
02759                     if ( ncoef < 0 ) t[-1] = -t[-1];
02760                     m -= k;
02761                     stop = m + 3;
02762                     r = tt;
02763                 }
02764 #endif
02765                 t = r;
02766             }
02767             if ( pden[i][1] == 4+FUNHEAD+ARGHEAD ) {
02768 DropDen:
02769                 for ( j = 0; j < nnco; j++ ) {
02770                     if ( pden[i] == pnco[j] ) {
02771                         --nnco;
02772                         while ( j < nnco ) {
02773                             pnco[j] = pnco[j+1];
02774                             j++;

```

```

02775             }
02776             break;
02777         }
02778     }
02779     pden[i--] = pden[--nden];
02780 }
02781 }
02782 }
02783 }
02784 /*
02785 #] Easy denominators :
02786 #[ Index Contractions :
02787 */
02788 if ( ndel ) {
02789     t = pdel;
02790     for ( i = 0; i < ndel; i += 2 ) {
02791         if ( t[0] == t[1] ) {
02792             if ( t[0] == EMPTYINDEX ) {}
02793             else if ( *t < AM.OffsetIndex ) {
02794                 k = AC.FixIndices[*t];
02795                 if ( k < 0 ) { j = -1; k = -k; }
02796                 else if ( k > 0 ) j = 1;
02797                 else goto NormZero;
02798                 goto WithFix;
02799             }
02800             else if ( *t >= AM.DumInd ) {
02801                 k = AC.lDefDim;
02802                 if ( k ) goto docontract;
02803             }
02804             else if ( *t >= AM.WilInd ) {
02805                 k = indices[*t-AM.OffsetIndex-WILDOFFSET].dimension;
02806                 if ( k ) goto docontract;
02807             }
02808             else if ( ( k = indices[*t-AM.OffsetIndex].dimension ) != 0 ) {
02809 docontract:
02810                 if ( k > 0 ) {
02811                     j = 1;
02812                     shortnum = k;
02813                     ncoef = REDLENG(ncoef);
02814                     if ( Mully(BHEAD (UWORD *)n_coef,&ncoef, (UWORD *)(&shortnum),j) )
02815                         goto FromNorm;
02816                     ncoef = INCLENG(ncoef);
02817                 }
02818                 else {
02819                     WORD change;
02820                     change = ExtraSymbol((WORD)(-k), (WORD)1, nsym, ppsym, &ncoef);
02821                     nsym += change;
02822                     ppsym += change * 2;
02823                 }
02824                 t[1] = pdel[ndel-1];
02825                 t[0] = pdel[ndel-2];
02826 HaveCon:
02827                 ndel -= 2;
02828                 i -= 2;
02829             }
02830         }
02831         else {
02832             if ( *t < AM.OffsetIndex && t[1] < AM.OffsetIndex ) goto NormZero;
02833             j = *t - AM.OffsetIndex;
02834             if ( j >= 0 && ( ( *t >= AM.DumInd && AC.lDefDim )
02835                 || ( *t < AM.WilInd && indices[j].dimension ) ) ) {
02836                 for ( j = i + 2, m = pdel+j; j < ndel; j += 2, m += 2 ) {
02837                     if ( *t == *m ) {
02838                         *t = m[1];
02839                         *m++ = pdel[ndel-2];
02840                         *m = pdel[ndel-1];
02841                         goto HaveCon;
02842                     }
02843                     else if ( *t == m[1] ) {
02844                         *t = *m;
02845                         *m++ = pdel[ndel-2];
02846                         *m = pdel[ndel-1];
02847                         goto HaveCon;
02848                     }
02849                 }
02850             }
02851             j = t[1]-AM.OffsetIndex;
02852             if ( j >= 0 && ( ( t[1] >= AM.DumInd && AC.lDefDim )
02853                 || ( t[1] < AM.WilInd && indices[j].dimension ) ) ) {
02854                 for ( j = i + 2, m = pdel+j; j < ndel; j += 2, m += 2 ) {
02855                     if ( t[1] == *m ) {
02856                         t[1] = m[1];
02857                         *m++ = pdel[ndel-2];
02858                         *m = pdel[ndel-1];
02859                         goto HaveCon;
02860                     }
02861                     else if ( t[1] == m[1] ) {

```



```

02862             t[1] = *m;
02863             *m++ = pdel[ndel-2];
02864             *m = pdel[ndel-1];
02865             goto HaveCon;
02866         }
02867     }
02868 }
02869     t += 2;
02870 }
02871 }
02872 if ( ndel > 0 ) {
02873     if ( nvec ) {
02874         t = pdel;
02875         for ( i = 0; i < ndel; i++ ) {
02876             if ( *t >= AM.OffsetIndex && ( ( *t >= AM.DumInd && AC.lDefDim ) ||
02877                 ( *t < AM.WilInd && indices[*t-AM.OffsetIndex].dimension ) ) ) {
02878                 r = pvec + 1;
02879                 for ( j = 1; j < nvec; j += 2 ) {
02880                     if ( *r == *t ) {
02881                         if ( i & 1 ) {
02882                             *r = t[-1];
02883                             *t-- = pdel[--ndel];
02884                             i -= 2;
02885                         }
02886                         else {
02887                             *r = t[1];
02888                             t[1] = pdel[--ndel];
02889                             i--;
02890                         }
02891                         *t-- = pdel[--ndel];
02892                         break;
02893                     }
02894                     r += 2;
02895                 }
02896             }
02897             t++;
02898         }
02899     }
02900     if ( ndel > 0 && ncon ) {
02901         t = pdel;
02902         for ( i = 0; i < ndel; i++ ) {
02903             if ( *t >= AM.OffsetIndex && ( ( *t >= AM.DumInd && AC.lDefDim ) ||
02904                 ( *t < AM.WilInd && indices[*t-AM.OffsetIndex].dimension ) ) ) {
02905                 for ( j = 0; j < ncon; j++ ) {
02906                     if ( *pcon[j] == *t ) {
02907                         if ( i & 1 ) {
02908                             *pcon[j] = t[-1];
02909                             *t-- = pdel[--ndel];
02910                             i -= 2;
02911                         }
02912                         else {
02913                             *pcon[j] = t[1];
02914                             t[1] = pdel[--ndel];
02915                             i--;
02916                         }
02917                         *t-- = pdel[--ndel];
02918                         didcontr++;
02919                         r = pcon[j];
02920                         for ( j = 0; j < nnco; j++ ) {
02921                             m = pnco[j];
02922                             if ( r > m && r < m+m[1] ) {
02923                                 m[2] |= DIRTYSYMFLAG;
02924                                 break;
02925                             }
02926                         }
02927                         for ( j = 0; j < ncom; j++ ) {
02928                             m = pcom[j];
02929                             if ( r > m && r < m+m[1] ) {
02930                                 m[2] |= DIRTYSYMFLAG;
02931                                 break;
02932                             }
02933                         }
02934                         for ( j = 0; j < neps; j++ ) {
02935                             m = peps[j];
02936                             if ( r > m && r < m+m[1] ) {
02937                                 m[2] |= DIRTYSYMFLAG;
02938                                 break;
02939                             }
02940                         }
02941                         break;
02942                     }
02943                 }
02944             }
02945             t++;
02946         }
02947     }
02948 }

```

```

02949     }
02950     if ( nvec ) {
02951         t = pvec + 1;
02952         for ( i = 3; i < nvec; i += 2 ) {
02953             k = *t - AM.OffsetIndex;
02954             if ( k >= 0 && ( ( *t > AM.DumInd && AC.lDefDim )
02955                 || ( *t < AM.WilInd && indices[k].dimension ) ) ) {
02956                 r = t + 2;
02957                 for ( j = i; j < nvec; j += 2 ) {
02958                     if ( *r == *t ) { /* Another dotproduct */
02959                         *ppdot++ = t[-1];
02960                         *ppdot++ = r[-1];
02961                         *ppdot++ = 1;
02962                         ndot++;
02963                         *r-- = pvec[--nvec];
02964                         *r = pvec[--nvec];
02965                         *t-- = pvec[--nvec];
02966                         *t-- = pvec[--nvec];
02967                         i -= 2;
02968                         break;
02969                     }
02970                     r += 2;
02971                 }
02972             }
02973             t += 2;
02974         }
02975         if ( nvec > 0 && ncon ) {
02976             t = pvec + 1;
02977             for ( i = 1; i < nvec; i += 2 ) {
02978                 k = *t - AM.OffsetIndex;
02979                 if ( k >= 0 && ( ( *t >= AM.DumInd && AC.lDefDim )
02980                     || ( *t < AM.WilInd && indices[k].dimension ) ) ) {
02981                     for ( j = 0; j < ncon; j++ ) {
02982                         if ( *pcon[j] == *t ) {
02983                             *pcon[j] = t[-1];
02984                             *t-- = pvec[--nvec];
02985                             *t-- = pvec[--nvec];
02986                             r = pcon[j];
02987                             pcon[j] = pcon[--ncon];
02988                             i -= 2;
02989                             for ( j = 0; j < nnco; j++ ) {
02990                                 m = pnco[j];
02991                                 if ( r > m && r < m+m[1] ) {
02992                                     m[2] |= DIRTYSYMFLAG;
02993                                     break;
02994                                 }
02995                             }
02996                             for ( j = 0; j < ncom; j++ ) {
02997                                 m = pcom[j];
02998                                 if ( r > m && r < m+m[1] ) {
02999                                     m[2] |= DIRTYSYMFLAG;
03000                                     break;
03001                                 }
03002                             }
03003                             for ( j = 0; j < neps; j++ ) {
03004                                 m = peps[j];
03005                                 if ( r > m && r < m+m[1] ) {
03006                                     m[2] |= DIRTYSYMFLAG;
03007                                     break;
03008                                 }
03009                             }
03010                             break;
03011                         }
03012                     }
03013                 }
03014                 t += 2;
03015             }
03016         }
03017     }
03018     /*
03019     #] Index Contractions :
03020     #[ NonCommuting Functions :
03021     */
03022     m = fillsetexp;
03023     if ( nnco ) {
03024         for ( i = 0; i < nnco; i++ ) {
03025             t = pnco[i];
03026             if ( ( *t >= (FUNCTION+WILDOFFSET)
03027                 && functions[*t-FUNCTION-WILDOFFSET].spec <= 0 )
03028                 || ( *t >= FUNCTION && *t < (FUNCTION + WILDOFFSET)
03029                 && functions[*t-FUNCTION].spec <= 0 ) ) {
03030                 DoRevert(t,m);
03031                 if ( didcontr ) {
03032                     r = t + FUNHEAD;
03033                     t += t[1];
03034                     while ( r < t ) {
03035                         if ( *r == -INDEX && r[1] >= 0 && r[1] < AM.OffsetIndex ) {

```

```

03036             *r = -SNUMBER;
03037             didcontr--;
03038             pnco[i][2] |= DIRTYSYMFLAG;
03039         }
03040         NEXTARG(r)
03041     }
03042 }
03043 }
03044 }
03045
03046 /* First should come the code for function properties. */
03047
03048 /* First we test for symmetric properties and the DIRTYSYMFLAG */
03049
03050 for ( i = 0; i < nnco; i++ ) {
03051     t = pnco[i];
03052     if ( *t > 0 && ( t[2] & DIRTYSYMFLAG ) && *t != DOLLAREXPRESSION ) {
03053         l = 0; /* to make the compiler happy */
03054         if ( ( *t >= (FUNCTION+WILDOFFSET)
03055             && ( l = functions[*t-FUNCTION-WILDOFFSET].symmetric ) > 0 )
03056             || ( *t >= FUNCTION && *t < (FUNCTION + WILDOFFSET)
03057             && ( l = functions[*t-FUNCTION].symmetric ) > 0 ) ) {
03058             if ( *t >= (FUNCTION+WILDOFFSET) ) {
03059                 *t -= WILDOFFSET;
03060                 j = FullSymmetrize(BHEAD t,l);
03061                 *t += WILDOFFSET;
03062             }
03063             else j = FullSymmetrize(BHEAD t,l);
03064             if ( ( l & ~REVERSEORDER ) == ANTISYMMETRIC ) {
03065                 if ( ( j & 2 ) != 0 ) goto NormZero;
03066                 if ( ( j & 1 ) != 0 ) ncoef = -ncoef;
03067             }
03068             else t[2] &= ~DIRTYSYMFLAG;
03069         }
03070     }
03071 }
03072
03073 /* Non commuting functions are then tested for commutation
03074    rules. If needed their order is exchanged. */
03075
03076 k = nnco - 1;
03077 for ( i = 0; i < k; i++ ) {
03078     j = i;
03079     while ( Commute(pnco[j],pnco[j+1]) ) {
03080         t = pnco[j]; pnco[j] = pnco[j+1]; pnco[j+1] = t;
03081         l = j+1;
03082         while ( l >= 0 && Commute(pnco[l],pnco[l+1]) ) {
03083             t = pnco[l]; pnco[l] = pnco[l+1]; pnco[l+1] = t;
03084             l--;
03085         }
03086         if ( ++j >= k ) break;
03087     }
03088 }
03089
03090 /* Finally they are written to output. gamma matrices
03091    are bundled if possible */
03092
03093 for ( i = 0; i < nnco; i++ ) {
03094     t = pnco[i];
03095     if ( *t == IDFUNCTION ) AN.idfunctionflag = 1;
03096     if ( *t >= GAMMA && *t <= GAMMASEVEN ) {
03097         WORD gtype;
03098         to = m;
03099         *m++ = GAMMA;
03100         m++;
03101         FILLFUN(m)
03102         *m++ = stype = t[FUNHEAD]; /* type of string */
03103         j = 0;
03104         nnum = 0;
03105         do {
03106             r = t + t[1];
03107             if ( *t == GAMMAFIVE ) {
03108                 gtype = GAMMA5; t += FUNHEAD; goto onegammamatrix; }
03109             else if ( *t == GAMMASIX ) {
03110                 gtype = GAMMA6; t += FUNHEAD; goto onegammamatrix; }
03111             else if ( *t == GAMMASEVEN ) {
03112                 gtype = GAMMA7; t += FUNHEAD; goto onegammamatrix; }
03113             t += FUNHEAD+1;
03114             while ( t < r ) {
03115                 gtype = *t;
03116 onegammamatrix:
03117                 if ( gtype == GAMMA5 ) {
03118                     if ( j == GAMMA1 ) j = GAMMA5;
03119                     else if ( j == GAMMA5 ) j = GAMMA1;
03120                     else if ( j == GAMMA7 ) ncoef = -ncoef;
03121                     if ( nnum & 1 ) ncoef = -ncoef;
03122                 }

```

```

03123         else if ( gtype == GAMMA6 || gtype == GAMMA7 ) {
03124             if ( nnum & 1 ) {
03125                 if ( gtype == GAMMA6 ) gtype = GAMMA7;
03126                 else gtype = GAMMA6;
03127             }
03128             if ( j == GAMMA1 ) j = gtype;
03129             else if ( j == GAMMA5 ) {
03130                 j = gtype;
03131                 if ( j == GAMMA7 ) ncoef = -ncoef;
03132             }
03133             else if ( j != gtype ) goto NormZero;
03134             else {
03135                 shortnum = 2;
03136                 ncoef = REDLENG(ncoef);
03137                 if ( Mully(BHEAD (UWORD *)n_coef,&ncoef,(UWORD *)(&shortnum),1) ) goto
FromNorm;
03138                 ncoef = INCLENG(ncoef);
03139             }
03140         }
03141         else {
03142             *m++ = gtype; nnum++;
03143         }
03144         t++;
03145     }
03146
03147     } while ( ( ++i < ncco ) && ( *(t = pcco[i]) >= GAMMA
&& *t <= GAMMASEVEN ) && ( t[FUNHEAD] == stype ) );
03148     i--;
03149     if ( j ) {
03150         k = WORDDIF(m,to) - FUNHEAD-1;
03151         r = m;
03152         from = m++;
03153         while ( --k >= 0 ) *from-- = *--r;
03154         *from = j;
03155     }
03156     to[1] = WORDDIF(m,to);
03157 }
03158
03159 else if ( *t < 0 ) {
03160     *m++ = -*t; *m++ = FUNHEAD; *m++ = 0;
03161     FILLFUN3(m)
03162 }
03163 else {
03164     if ( ( t[2] & DIRTYFLAG ) == DIRTYFLAG
&& *t != REPLACEMENT && *t != DOLLAREXPRESSSION
&& TestFunFlag(BHEAD t) ) ReplaceVeto = 1;
03165     k = t[1];
03166     NCOPY(m,t,k);
03167 }
03168 }
03169 }
03170 }
03171 }
03172 }
03173 /*
03174 #] NonCommuting Functions :
03175 #[ Commuting Functions :
03176 */
03177 if ( ncom ) {
03178     for ( i = 0; i < ncom; i++ ) {
03179         t = pcom[i];
03180         if ( ( *t >= (FUNCTION+WILDOFFSET)
&& functions[*t-FUNCTION-WILDOFFSET].spec <= 0 )
|| ( *t >= FUNCTION && *t < (FUNCTION + WILDOFFSET)
&& functions[*t-FUNCTION].spec <= 0 ) ) {
03181             DoRevert(t,m);
03182             if ( didcontr ) {
03183                 r = t + FUNHEAD;
03184                 t += t[1];
03185                 while ( r < t ) {
03186                     if ( *r == -INDEX && r[1] >= 0 && r[1] < AM.OffsetIndex ) {
03187                         *r = -SNUMBER;
03188                         didcontr--;
03189                         pcom[i][2] |= DIRTYSYMFLAG;
03190                     }
03191                     NEXTARG(r)
03192                 }
03193             }
03194         }
03195     }
03196 }
03197 }
03198 }
03199
03200 /* Now we test for symmetric properties and the DIRTYSYMFLAG */
03201
03202 for ( i = 0; i < ncom; i++ ) {
03203     t = pcom[i];
03204     if ( *t > 0 && ( t[2] & DIRTYSYMFLAG ) ) {
03205         l = 0; /* to make the compiler happy */
03206         if ( ( *t >= (FUNCTION+WILDOFFSET)
&& ( l = functions[*t-FUNCTION-WILDOFFSET].symmetric ) > 0 )
|| ( *t >= FUNCTION && *t < (FUNCTION + WILDOFFSET)

```

```

03209         && ( l = functions[*t-FUNCTION].symmetric ) > 0 ) ) {
03210             if ( *t >= (FUNCTION+WILDOFFSET) ) {
03211                 *t -= WILDOFFSET;
03212                 j = FullSymmetrize(BHEAD t,l);
03213                 *t += WILDOFFSET;
03214             }
03215             else j = FullSymmetrize(BHEAD t,l);
03216             if ( (l & ~REVERSEORDER) == ANTISYMMETRIC ) {
03217                 if ( ( j & 2 ) != 0 ) goto NormZero;
03218                 if ( ( j & 1 ) != 0 ) ncoef = -ncoef;
03219             }
03220         }
03221         else t[2] &= ~DIRTYSYMFLAG;
03222     }
03223 }
03224 /*
03225 Sort the functions
03226 From a purists point of view this can be improved.
03227 There are slow and fast arguments and no conversions are
03228 taken into account here.
03229 */
03230 for ( i = 1; i < ncom; i++ ) {
03231     for ( j = i; j > 0; j-- ) {
03232         WORD jj, kk;
03233         jj = j-1;
03234         t = pcom[jj];
03235         r = pcom[j];
03236         if ( *t < 0 ) {
03237             if ( *r < 0 ) { if ( *t >= *r ) goto NextI; }
03238             else { if ( -*t <= *r ) goto NextI; }
03239             goto jexch;
03240         }
03241         else if ( *r < 0 ) {
03242             if ( *t < -*r ) goto NextI;
03243             goto jexch;
03244         }
03245         else if ( *t != *r ) {
03246             if ( *t < *r ) goto NextI;
03247             t = pcom[j]; pcom[j] = pcom[jj]; pcom[jj] = t;
03248             continue;
03249         }
03250         if ( AC.properorderflag ) {
03251             if ( *t >= (FUNCTION+WILDOFFSET)
03252                 && functions[*t-FUNCTION-WILDOFFSET].spec >= TENSORFUNCTION )
03253             || ( *t >= FUNCTION && *t < (FUNCTION + WILDOFFSET)
03254                 && functions[*t-FUNCTION].spec >= TENSORFUNCTION ) ) {}
03255             else {
03256                 WORD *s1, *s2, *ss1, *ss2;
03257                 s1 = t+FUNHEAD; s2 = r+FUNHEAD;
03258                 ss1 = t + t[1]; ss2 = r + r[1];
03259                 while ( s1 < ss1 && s2 < ss2 ) {
03260                     k = CompArg(s1,s2);
03261                     if ( k > 0 ) goto jexch;
03262                     if ( k < 0 ) goto NextI;
03263                     NEXTARG(s1)
03264                     NEXTARG(s2)
03265                 }
03266                 if ( s1 < ss1 ) goto jexch;
03267                 goto NextI;
03268             }
03269             k = t[1] - FUNHEAD;
03270             kk = r[1] - FUNHEAD;
03271             t += FUNHEAD;
03272             r += FUNHEAD;
03273             while ( k > 0 && kk > 0 ) {
03274                 if ( *t < *r ) goto NextI;
03275                 else if ( *t++ > *r++ ) goto jexch;
03276                 k--; kk--;
03277             }
03278             if ( k > 0 ) goto jexch;
03279             goto NextI;
03280         }
03281         else
03282         {
03283             k = t[1] - FUNHEAD;
03284             kk = r[1] - FUNHEAD;
03285             t += FUNHEAD;
03286             r += FUNHEAD;
03287             while ( k > 0 && kk > 0 ) {
03288                 if ( *t < *r ) goto NextI;
03289                 else if ( *t++ > *r++ ) goto jexch;
03290                 k--; kk--;
03291             }
03292             if ( k > 0 ) goto jexch;
03293             goto NextI;
03294         }
03295     }
}

```

```

03296 NextI;;
03297     }
03298     for ( i = 0; i < ncom; i++ ) {
03299         t = pcom[i];
03300         if ( *t == THETA || *t == THETA2 ) {
03301             if ( ( k = DoTheta(BHEAD t) ) == 0 ) goto NormZero;
03302             else if ( k < 0 ) {
03303                 k = t[1];
03304                 NCOPY(m,t,k);
03305             }
03306         }
03307         else if ( *t == DELTA2 || *t == DELTAP ) {
03308             if ( ( k = DoDelta(t) ) == 0 ) goto NormZero;
03309             else if ( k < 0 ) {
03310                 k = t[1];
03311                 NCOPY(m,t,k);
03312             }
03313         }
03314         else if ( *t == AR.PolyFunInv && AR.PolyFunType == 2 ) {
03315             /*
03316              If there are two arguments, exchange them, change the
03317              name of the function and go to dealing with PolyRatFun.
03318             */
03319             WORD *mm, *tt = t, numt = 0;
03320             tt += FUNHEAD;
03321             while ( tt < t+tt[1] ) { numt++; NEXTARG(tt) }
03322             if ( numt == 2 ) {
03323                 tt = t; mm = m; k = t[1];
03324                 NCOPY(mm,tt,k)
03325                 mm = m+FUNHEAD;
03326                 NEXTARG(mm);
03327                 tt = t+FUNHEAD;
03328                 if ( *mm < 0 ) {
03329                     if ( *mm <= -FUNCTION ) { *tt++ = *mm++; }
03330                     else { *tt++ = *mm++; *tt++ = *mm++; }
03331                 }
03332                 else {
03333                     k = *mm; NCOPY(tt,mm,k)
03334                 }
03335                 mm = m+FUNHEAD;
03336                 if ( *mm < 0 ) {
03337                     if ( *mm <= -FUNCTION ) { *tt++ = *mm++; }
03338                     else { *tt++ = *mm++; *tt++ = *mm++; }
03339                 }
03340                 else {
03341                     k = *mm; NCOPY(tt,mm,k)
03342                 }
03343                 *t = AR.PolyFun;
03344                 t[2] |= MUSTCLEANPRF;
03345                 goto regularratfun;
03346             }
03347         }
03348         else if ( *t == AR.PolyFun ) {
03349             if ( AR.PolyFunType == 1 ) { /* Regular PolyFun with one argument */
03350                 if ( t[FUNHEAD+1] == 0 && AR.Eside != LHSIDE &&
03351                     t[1] == FUNHEAD + 2 && t[FUNHEAD] == -SNUMBER ) goto NormZero;
03352                 if ( i > 0 && pcom[i-1][0] == AR.PolyFun ) {
03353                     if ( AN.PolyNormFlag == 0 ) {
03354                         AN.PolyNormFlag = 1;
03355                         AN.PolyFunTodo = 0;
03356                     }
03357                 }
03358                 k = t[1];
03359                 NCOPY(m,t,k);
03360             }
03361             else if ( AR.PolyFunType == 2 ) {
03362                 /*
03363                  PolyRatFun.
03364                  Regular type: Two arguments
03365                  Power expanded: One argument. Here to be treated as
03366                  AR.PolyFunType == 1, but with power cutoff.
03367                 */
03368                 regularratfun;
03369                 /*
03370                  First check for zeroes.
03371                 */
03372                 if ( t[FUNHEAD+1] == 0 && AR.Eside != LHSIDE &&
03373                     t[1] > FUNHEAD + 2 && t[FUNHEAD] == -SNUMBER ) {
03374                     u = t + FUNHEAD + 2;
03375                     if ( *u < 0 ) {
03376                         if ( *u <= -FUNCTION ) {}
03377                         else if ( t[1] == FUNHEAD+4 && t[FUNHEAD+2] == -SNUMBER
03378                             && t[FUNHEAD+3] == 0 ) goto NormPRF;
03379                         else if ( t[1] == FUNHEAD+4 ) goto NormZero;
03380                     }
03381                     else if ( t[1] == *u+FUNHEAD+2 ) goto NormZero;
03382                 }

```

```

03383         else {
03384             u = t+FUNHEAD; NEXTARG(u);
03385             if ( *u == -SNUMBER && u[1] == 0 ) goto NormInf;
03386         }
03387         if ( i > 0 && pcom[i-1][0] == AR.PolyFun ) AN.PolyNormFlag = 1;
03388         else if ( i < ncom-1 && pcom[i+1][0] == AR.PolyFun ) AN.PolyNormFlag = 1;
03389         k = t[1];
03390         if ( AN.PolyNormFlag ) {
03391             if ( AR.PolyFunExp == 0 ) {
03392                 AN.PolyFunTodo = 0;
03393                 NCOPY(m,t,k);
03394             }
03395             else if ( AR.PolyFunExp == 1 ) { /* get highest divergence */
03396                 if ( PolyFunMode == 0 ) {
03397                     NCOPY(m,t,k);
03398                     AN.PolyFunTodo = 1;
03399                 }
03400                 else {
03401                     WORD *mmm = m;
03402                     NCOPY(m,t,k);
03403                     if ( TreatPolyRatFun(BHEAD mmm) != 0 )
03404                         goto FromNorm;
03405                     m = mmm+mmm[1];
03406                 }
03407             }
03408             else {
03409                 if ( PolyFunMode == 0 ) {
03410                     NCOPY(m,t,k);
03411                     AN.PolyFunTodo = 1;
03412                 }
03413                 else {
03414                     WORD *mmm = m;
03415                     NCOPY(m,t,k);
03416                     if ( ExpandRat(BHEAD mmm) != 0 )
03417                         goto FromNorm;
03418                     m = mmm+mmm[1];
03419                 }
03420             }
03421         }
03422         else {
03423             if ( AR.PolyFunExp == 0 ) {
03424                 AN.PolyFunTodo = 0;
03425                 NCOPY(m,t,k);
03426             }
03427             else if ( AR.PolyFunExp == 1 ) { /* get highest divergence */
03428                 WORD *mmm = m;
03429                 NCOPY(m,t,k);
03430                 if ( TreatPolyRatFun(BHEAD mmm) != 0 )
03431                     goto FromNorm;
03432                 m = mmm+mmm[1];
03433             }
03434             else {
03435                 WORD *mmm = m;
03436                 NCOPY(m,t,k);
03437                 if ( ExpandRat(BHEAD mmm) != 0 )
03438                     goto FromNorm;
03439                 m = mmm+mmm[1];
03440             }
03441         }
03442     }
03443 }
03444 else if ( *t > 0 ) {
03445     if ( ( t[2] & DIRTYFLAG ) == DIRTYFLAG
03446         && *t != REPLACEMENT && TestFunFlag(BHEAD t) ) ReplaceVeto = 1;
03447     k = t[1];
03448     NCOPY(m,t,k);
03449 }
03450 else {
03451     *m++ = -*t; *m++ = FUNHEAD; *m++ = 0;
03452     FILLFUN3(m)
03453 }
03454 }
03455 }
03456 /*
03457 #] Commuting Functions :
03458 #[ Track Replace_ :
03459 */
03460 if ( ReplaceVeto < 0 ) {
03461 /*
03462     We found one (or more) replace_ functions and all other
03463     functions are 'clean' (no dirty flag).
03464     Now we check whether one of these functions can be used.
03465     Thus far the functions go from fillsetexp to m.
03466     Somewhere in there there are -ReplaceVeto occurrences of REPLACEMENT.
03467     Hunt for the first one that fits the bill.
03468     Note that replace_ is a commuting function.
03469 */

```

```

03470     WORD *ma = fillsetexp, *mb, *mc;
03471     while ( ma < m ) {
03472         mb = ma + ma[1];
03473         if ( *ma != REPLACEMENT ) {
03474             ma = mb;
03475             continue;
03476         }
03477         if ( *ma == REPLACEMENT && ReplaceType == -1 ) {
03478             mc = ma;
03479             ReplaceType = 0;
03480             if ( AN.RSsize < 2*ma[1]+SUBEXPSIZE ) {
03481                 if ( AN.ReplaceScrat ) M_free(AN.ReplaceScrat,"AN.ReplaceScrat");
03482                 AN.RSsize = 2*ma[1]+SUBEXPSIZE+40;
03483                 AN.ReplaceScrat = (WORD *)Malloc1((AN.RSsize+1)*sizeof(WORD),"AN.ReplaceScrat");
03484             }
03485             ma += FUNHEAD;
03486             ReplaceSub = AN.ReplaceScrat;
03487             ReplaceSub += SUBEXPSIZE;
03488             while ( ma < mb ) {
03489                 if ( *ma > 0 ) goto NoRep;
03490                 if ( *ma <= -FUNCTION ) {
03491                     *ReplaceSub++ = FUNTOFUN;
03492                     *ReplaceSub++ = 4;
03493                     *ReplaceSub++ = -*ma++;
03494                     if ( *ma > -FUNCTION ) goto NoRep;
03495                     *ReplaceSub++ = -*ma++;
03496                 }
03497                 else if ( ma+4 > mb ) goto NoRep;
03498                 else {
03499                     if ( *ma == -SYMBOL ) {
03500                         if ( ma[2] == -SYMBOL && ma+4 <= mb )
03501                             *ReplaceSub++ = SYMTOSYM;
03502                         else if ( ma[2] == -SNUMBER && ma+4 <= mb ) {
03503                             *ReplaceSub++ = SYMTONUM;
03504                             if ( ReplaceType == 0 ) {
03505                                 oldtoprhs = C->numrhs;
03506                                 oldcpointer = C->Pointer - C->Buffer;
03507                             }
03508                             ReplaceType = 1;
03509                         }
03510                         else if ( ma[2] == ARGHEAD && ma+2+ARGHEAD <= mb ) {
03511                             *ReplaceSub++ = SYMTONUM;
03512                             *ReplaceSub++ = 4;
03513                             *ReplaceSub++ = ma[1];
03514                             *ReplaceSub++ = 0;
03515                             ma += 2+ARGHEAD;
03516                             continue;
03517                         }
03518                     /*
03519                     Next is the subexpression. We have to test that
03520                     it isn't vector-like or index-like
03521                     */
03522                     else if ( ma[2] > 0 ) {
03523                         WORD *sstop, *ttstop, n;
03524                         ss = ma+2;
03525                         sstop = ss + *ss;
03526                         ss += ARGHEAD;
03527                         while ( ss < sstop ) {
03528                             tt = ss + *ss;
03529                             ttstop = tt - ABS(tt[-1]);
03530                             ss++;
03531                             while ( ss < ttstop ) {
03532                                 if ( *ss == INDEX ) goto NoRep;
03533                                 ss += ss[1];
03534                             }
03535                             ss = tt;
03536                         }
03537                         subtype = SYMTOSUB;
03538                         if ( ReplaceType == 0 ) {
03539                             oldtoprhs = C->numrhs;
03540                             oldcpointer = C->Pointer - C->Buffer;
03541                         }
03542                         ReplaceType = 1;
03543                         ss = AddRHS(AT.ebufnum,1);
03544                         tt = ma+2;
03545                         n = *tt - ARGHEAD;
03546                         tt += ARGHEAD;
03547                         while ( (ss + n + 10) > C->Top ) ss = DoubleCbuffer(AT.ebufnum,ss,14);
03548                         while ( --n >= 0 ) *ss++ = *tt++;
03549                         *ss++ = 0;
03550                         C->rhs[C->numrhs+1] = ss;
03551                         C->Pointer = ss;
03552                         *ReplaceSub++ = subtype;
03553                         *ReplaceSub++ = 4;
03554                         *ReplaceSub++ = ma[1];
03555                         *ReplaceSub++ = C->numrhs;
03556                         ma += 2 + ma[2];

```



```

03557         continue;
03558     }
03559     else goto NoRep;
03560 }
03561 else if ( ( *ma == -VECTOR || *ma == -MINVECTOR ) && ma+4 <= mb ) {
03562     if ( ma[2] == -VECTOR ) {
03563         if ( *ma == -VECTOR ) *ReplaceSub++ = VECTOVEC;
03564         else *ReplaceSub++ = VECTOMIN;
03565     }
03566     else if ( ma[2] == -MINVECTOR ) {
03567         if ( *ma == -VECTOR ) *ReplaceSub++ = VECTOMIN;
03568         else *ReplaceSub++ = VECTOVEC;
03569     }
03570 /*
03571     Next is a vector-like subexpression
03572     Search for vector nature first
03573 */
03574     else if ( ma[2] > 0 ) {
03575         WORD *sstop, *ttstop, *w, *mm, n, count;
03576         WORD *v1, *v2 = 0;
03577         if ( *ma == -MINVECTOR ) {
03578             ss = ma+2;
03579             sstop = ss + *ss;
03580             ss += ARGHEAD;
03581             while ( ss < sstop ) {
03582                 ss += *ss;
03583                 ss[-1] = -ss[-1];
03584             }
03585             *ma = -VECTOR;
03586         }
03587         ss = ma+2;
03588         sstop = ss + *ss;
03589         ss += ARGHEAD;
03590         while ( ss < sstop ) {
03591             tt = ss + *ss;
03592             ttstop = tt - ABS(tt[-1]);
03593             ss++;
03594             count = 0;
03595             while ( ss < ttstop ) {
03596                 if ( *ss == INDEX ) {
03597                     n = ss[1] - 2; ss += 2;
03598                     while ( --n >= 0 ) {
03599                         if ( *ss < MINSPEC ) count++;
03600                         ss++;
03601                     }
03602                 }
03603                 else ss += ss[1];
03604             }
03605             if ( count != 1 ) goto NoRep;
03606             ss = tt;
03607         }
03608         subtype = VECTOSUB;
03609         if ( ReplaceType == 0 ) {
03610             oldtoprhs = C->numrhs;
03611             oldcpointer = C->Pointer - C->Buffer;
03612         }
03613         ReplaceType = 1;
03614         mm = AddRHS(AT.ebufnum,1);
03615         *ReplaceSub++ = subtype;
03616         *ReplaceSub++ = 4;
03617         *ReplaceSub++ = ma[1];
03618         *ReplaceSub++ = C->numrhs;
03619         w = ma+2;
03620         n = *w - ARGHEAD;
03621         w += ARGHEAD;
03622         while ( (mm + n + 10) > C->Top )
03623             mm = DoubleCbuffer(AT.ebufnum,mm,15);
03624         while ( --n >= 0 ) *mm++ = *w++;
03625         *mm++ = 0;
03626         C->rhs[C->numrhs+1] = mm;
03627         C->Pointer = mm;
03628         mm = AddRHS(AT.ebufnum,1);
03629         w = ma+2;
03630         n = *w - ARGHEAD;
03631         w += ARGHEAD;
03632         while ( (mm + n + 13) > C->Top )
03633             mm = DoubleCbuffer(AT.ebufnum,mm,16);
03634         sstop = w + n;
03635         while ( w < sstop ) {
03636             tt = w + *w; ttstop = tt - ABS(tt[-1]);
03637             ss = mm; mm++; w++;
03638             while ( w < ttstop ) { /* Subterms */
03639                 if ( *w != INDEX ) {
03640                     n = w[1];
03641                     NCOPY(mm,w,n);
03642                 }
03643                 else {

```

```

03644         v1 = mm;
03645         *mm++ = *w++;
03646         *mm++ = n = *w++;
03647         n -= 2;
03648         while ( --n >= 0 ) {
03649             if ( *w >= MINSPEC ) *mm++ = *w++;
03650             else v2 = w++;
03651         }
03652         n = WORDDIFF(mm,v1);
03653         if ( n != v1[1] ) {
03654             if ( n <= 2 ) mm -= 2;
03655             else v1[1] = n;
03656             *mm++ = VECTOR;
03657             *mm++ = 4;
03658             *mm++ = *v2;
03659             *mm++ = FUNNYVEC;
03660         }
03661     }
03662 }
03663 while ( w < tt ) *mm++ = *w++;
03664 *ss = WORDDIFF(mm,ss);
03665 }
03666 *mm++ = 0;
03667 C->rhs[C->numrhs+1] = mm;
03668 C->Pointer = mm;
03669 if ( mm > C->Top ) {
03670     MLOCK(ErrorMessageLock);
03671     MesPrint("Internal error in Normalize with extra compiler
buffer");
03672     MUNLOCK(ErrorMessageLock);
03673     Terminate(-1);
03674 }
03675 ma += 2 + ma[2];
03676 continue;
03677 }
03678 else goto NoRep;
03679 }
03680 else if ( *ma == -INDEX ) {
03681     if ( ( ma[2] == -INDEX || ma[2] == -VECTOR )
03682         && ma+4 <= mb )
03683         *ReplaceSub++ = INDTOIND;
03684     else if ( ma[1] >= AM.OffsetIndex ) {
03685         if ( ma[2] == -SNUMBER && ma+4 <= mb
03686             && ma[3] >= 0 && ma[3] < AM.OffsetIndex )
03687             *ReplaceSub++ = INDTOIND;
03688         else if ( ma[2] == ARGHEAD && ma+2+ARGHEAD <= mb ) {
03689             *ReplaceSub++ = INDTOIND;
03690             *ReplaceSub++ = 4;
03691             *ReplaceSub++ = ma[1];
03692             *ReplaceSub++ = 0;
03693             ma += 2+ARGHEAD;
03694             continue;
03695         }
03696         else goto NoRep;
03697     }
03698     else goto NoRep;
03699 }
03700 else goto NoRep;
03701 *ReplaceSub++ = 4;
03702 *ReplaceSub++ = ma[1];
03703 *ReplaceSub++ = ma[3];
03704 ma += 4;
03705 }
03706 }
03707 }
03708 AN.ReplaceScrat[1] = ReplaceSub-AN.ReplaceScrat;
03709 /*
03710 Success. This means that we have to remove the replace_
03711 from the functions. It starts at mc and end at mb.
03712 */
03713 while ( mb < m ) *mc++ = *mb++;
03714 m = mc;
03715 break;
03716 NoRep:
03717 if ( ReplaceType > 0 ) {
03718     C->numrhs = oldtoprhs;
03719     C->Pointer = C->Buffer + oldcpointer;
03720 }
03721 ReplaceType = -1;
03722 if ( ++ReplaceVeto >= 0 ) break;
03723 }
03724 ma = mb;
03725 }
03726 }
03727 /*
03728 #] Track Replace_ :
03729 #[ LeviCivita tensors :

```

```

03730 */
03731     if ( neps ) {
03732         to = m;
03733         for ( i = 0; i < neps; i++ ) { /* Put the indices in order */
03734             t = peps[i];
03735             if ( ( t[2] & DIRTYSYMFLAG ) != DIRTYSYMFLAG ) continue;
03736             t[2] &= ~DIRTYSYMFLAG;
03737             if ( AR.Eside == LHSIDE || AR.Eside == LHSIDEX ) {
03738                 /* Potential problems with FUNNYWILD */
03739             }
03740             /*
03741              * First make sure all FUNNIES are at the end.
03742              * Then sort separately
03743             */
03744             r = t + FUNHEAD;
03745             m = tt = t + t[1];
03746             while ( r < m ) {
03747                 if ( *r != FUNNYWILD ) { r++; continue; }
03748                 k = r[1]; u = r + 2;
03749                 while ( u < tt ) {
03750                     u[-2] = *u;
03751                     if ( *u != FUNNYWILD ) ncoef = -ncoef;
03752                     u++;
03753                 }
03754                 tt[-2] = FUNNYWILD; tt[-1] = k; m -= 2;
03755             }
03756             t += FUNHEAD;
03757             do {
03758                 for ( r = t + 1; r < m; r++ ) {
03759                     if ( *r < *t ) { k = *r; *r = *t; *t = k; ncoef = -ncoef; }
03760                     else if ( *r == *t ) goto NormZero;
03761                 }
03762                 t++;
03763             } while ( t < m );
03764             do {
03765                 for ( r = t + 2; r < tt; r += 2 ) {
03766                     if ( r[1] < t[1] ) {
03767                         k = r[1]; r[1] = t[1]; t[1] = k; ncoef = -ncoef; }
03768                     else if ( r[1] == t[1] ) goto NormZero;
03769                 }
03770                 t += 2;
03771             } while ( t < tt );
03772             else {
03773                 m = t + t[1];
03774                 t += FUNHEAD;
03775                 do {
03776                     for ( r = t + 1; r < m; r++ ) {
03777                         if ( *r < *t ) { k = *r; *r = *t; *t = k; ncoef = -ncoef; }
03778                         else if ( *r == *t ) goto NormZero;
03779                     }
03780                     t++;
03781                 } while ( t < m );
03782             }
03783         }
03784         /* Sort the tensors */
03785         for ( i = 0; i < (neps-1); i++ ) {
03786             t = peps[i];
03787             for ( j = i+1; j < neps; j++ ) {
03788                 r = peps[j];
03789                 if ( t[1] > r[1] ) {
03790                     peps[i] = m = r; peps[j] = r = t; t = m;
03791                 }
03792                 else if ( t[1] == r[1] ) {
03793                     k = t[1] - FUNHEAD;
03794                     m = t + FUNHEAD;
03795                     r += FUNHEAD;
03796                     do {
03797                         if ( *r < *m ) {
03798                             m = peps[j]; peps[j] = t; peps[i] = t = m;
03799                             break;
03800                         }
03801                         else if ( *r++ > *m++ ) break;
03802                     } while ( --k > 0 );
03803                 }
03804             }
03805         }
03806         m = to;
03807         for ( i = 0; i < neps; i++ ) {
03808             t = peps[i];
03809             k = t[1];
03810             NCOPY(m,t,k);
03811         }
03812     }
03813 }
03814 */
03815 #] LeviCivita tensors :

```

```

03817     #[ Delta :
03818     /*
03819     if ( ndel ) {
03820         r = t = pdel;
03821         for ( i = 0; i < ndel; i += 2, r += 2 ) {
03822             if ( r[1] < r[0] ) { k = *r; *r = r[1]; r[1] = k; }
03823         }
03824         for ( i = 2; i < ndel; i += 2, t += 2 ) {
03825             r = t + 2;
03826             for ( j = i; j < ndel; j += 2 ) {
03827                 if ( *r > *t ) { r += 2; }
03828                 else if ( *r < *t ) {
03829                     k = *r; *r++ = *t; *t++ = k;
03830                     k = *r; *r++ = *t; *t-- = k;
03831                 }
03832                 else {
03833                     if ( **r < t[1] ) {
03834                         k = *r; *r = t[1]; t[1] = k;
03835                     }
03836                     r++;
03837                 }
03838             }
03839         }
03840         t = pdel;
03841         *m++ = DELTA;
03842         *m++ = ndel + 2;
03843         i = ndel;
03844         NCOPY(m,t,i);
03845     }
03846     /*
03847     #[ Delta :
03848     #[ Loose Vectors/Indices :
03849     /*
03850     if ( nind ) {
03851         t = pind;
03852         for ( i = 0; i < nind; i++ ) {
03853             r = t + 1;
03854             for ( j = i+1; j < nind; j++ ) {
03855                 if ( *r < *t ) {
03856                     k = *r; *r = *t; *t = k;
03857                 }
03858                 r++;
03859             }
03860             t++;
03861         }
03862         t = pind;
03863         *m++ = INDEX;
03864         *m++ = nind + 2;
03865         i = nind;
03866         NCOPY(m,t,i);
03867     }
03868     /*
03869     #[ Loose Vectors/Indices :
03870     #[ Vectors :
03871     /*
03872     if ( nvec ) {
03873         t = pvec;
03874         for ( i = 2; i < nvec; i += 2 ) {
03875             r = t + 2;
03876             for ( j = i; j < nvec; j += 2 ) {
03877                 if ( *r == *t ) {
03878                     if ( **r < t[1] ) {
03879                         k = *r; *r = t[1]; t[1] = k;
03880                     }
03881                     r++;
03882                 }
03883                 else if ( *r < *t ) {
03884                     k = *r; *r++ = *t; *t++ = k;
03885                     k = *r; *r++ = *t; *t-- = k;
03886                 }
03887                 else { r += 2; }
03888             }
03889             t += 2;
03890         }
03891         t = pvec;
03892         *m++ = VECTOR;
03893         *m++ = nvec + 2;
03894         i = nvec;
03895         NCOPY(m,t,i);
03896     }
03897     /*
03898     #[ Vectors :
03899     #[ Dotproducts :
03900     /*
03901     if ( ndot ) {
03902         to = m;
03903         m = t = pdot;

```

```

03904     i = ndot;
03905     while ( --i >= 0 ) {
03906         if ( *t > t[1] ) { j = *t; *t = t[1]; t[1] = j; }
03907         t += 3;
03908     }
03909     t = m;
03910     ndot *= 3;
03911     m += ndot;
03912     while ( t < (m-3) ) {
03913         r = t + 3;
03914         do {
03915             if ( *r == *t ) {
03916                 if ( *++r == *++t ) {
03917                     r++;
03918                     if ( ( *r < MAXPOWER && t[1] < MAXPOWER )
03919                         || ( *r > -MAXPOWER && t[1] > -MAXPOWER ) ) {
03920                         t++;
03921                         *t += *r;
03922                         if ( *t > MAXPOWER || *t < -MAXPOWER ) {
03923                             MLOCK(ErrorMessageLock);
03924                             MesPrint("Exponent of dotproduct out of range: %d",*t);
03925                             MUNLOCK(ErrorMessageLock);
03926                             goto NormMin;
03927                         }
03928                         ndot -= 3;
03929                         *r-- = *--m;
03930                         *r-- = *--m;
03931                         *r = *--m;
03932                         if ( !*t ) {
03933                             ndot -= 3;
03934                             *t-- = *--m;
03935                             *t-- = *--m;
03936                             *t = *--m;
03937                             t -= 3;
03938                             break;
03939                         }
03940                     }
03941                     else if ( *r < *++t ) {
03942                         k = *r; *r++ = *t; *t = k;
03943                     }
03944                     else r++;
03945                     t -= 2;
03946                 }
03947                 else if ( *r < *t ) {
03948                     k = *r; *r++ = *t; *t++ = k;
03949                     k = *r; *r++ = *t; *t = k;
03950                     t -= 2;
03951                 }
03952                 else { r += 2; t--; }
03953             }
03954             else if ( *r < *t ) {
03955                 k = *r; *r++ = *t; *t++ = k;
03956                 k = *r; *r++ = *t; *t++ = k;
03957                 k = *r; *r++ = *t; *t = k;
03958                 t -= 2;
03959             }
03960             else { r += 3; }
03961         } while ( r < m );
03962         t += 3;
03963     }
03964     m = to;
03965     t = pdot;
03966     if ( ( i = ndot ) > 0 ) {
03967         *m++ = DOTPRODUCT;
03968         *m++ = i + 2;
03969         NCOPY(m,t,i);
03970     }
03971 }
03972 /*
03973 #] Dotproducts :
03974 #[ Symbols :
03975 */
03976 if ( nsym ) {
03977     nsym <= 1;
03978     t = psym;
03979     *m++ = SYMBOL;
03980     r = m;
03981     *m++ = ( i = nsym ) + 2;
03982     if ( i ) { do {
03983         if ( !*t ) {
03984             if ( t[1] < (2*MAXPOWER) ) { /* powers of i */
03985                 if ( t[1] & 1 ) { *m++ = 0; *m++ = 1; }
03986                 else *r -= 2;
03987                 if ( *++t & 2 ) ncoef = -ncoef;
03988                 t++;
03989             }
03990         }

```

```

03991     else if ( *t <= NumSymbols && *t > -2*MAXPOWER ) { /* Put powers in range */
03992         if ( ( ( t[1] > symbols[*t].maxpower ) && ( symbols[*t].maxpower < MAXPOWER ) ) ||
03993             ( ( t[1] < symbols[*t].minpower ) && ( symbols[*t].minpower > -MAXPOWER ) ) )
03994             &&
03995                 ( t[1] < 2*MAXPOWER ) && ( t[1] > -2*MAXPOWER ) ) {
03996             if ( i <= 2 || t[2] != *t ) goto NormZero;
03997         }
03998         if ( AN.ncmod == 1 && ( AC.modmode & ALSOPOWERS ) != 0 ) {
03999             if ( AC.cmod[0] == 1 ) t[1] = 0;
04000             else if ( t[1] >= 0 ) t[1] = 1 + (t[1]-1)%(AC.cmod[0]-1);
04001             else {
04002                 t[1] = -1 - (-t[1]-1)%(AC.cmod[0]-1);
04003                 if ( t[1] < 0 ) t[1] += (AC.cmod[0]-1);
04004             }
04005             if ( ( t[1] < (2*MAXPOWER) && t[1] >= MAXPOWER )
04006                 || ( t[1] > -(2*MAXPOWER) && t[1] <= -MAXPOWER ) ) {
04007                 MLOCK(ErrorMessageLock);
04008                 MesPrint("Exponent out of range: %d",t[1]);
04009                 MUNLOCK(ErrorMessageLock);
04010                 goto NormMin;
04011             }
04012             if ( AT.TrimPower && AR.PolyFunVar == *t && t[1] > AR.PolyFunPow ) {
04013                 goto NormZero;
04014             }
04015             else if ( t[1] ) {
04016                 *m++ = *t++;
04017                 *m++ = *t++;
04018             }
04019             else { *r -- 2; t += 2; }
04020         }
04021         else {
04022             *m++ = *t++; *m++ = *t++;
04023         }
04024     } while ( (i--2) > 0 ); }
04025     if ( *r <= 2 ) m = r-1;
04026 }
04027 /*
04028 #] Symbols :
04029 #[ float_ :
04030
04031 Here we treat float_ functions and combined them with the regular
04032 coefficient.
04033 */
04034
04035 #ifndef WITHFLOAT
04036     if ( withfloat ) {
04037         WORD floatsign = 3;
04038     /*
04039         First check whether the coefficient is already 1/1
04040     */
04041     if ( ABS(nccoef) == 3 && n_coef[0] == 1 && n_coef[1] == 1 ) {
04042         if ( withfloat == 1 ) {
04043             t = firstfloat;
04044         /*
04045             We only interfere by making the sign positive.
04046             The float_ function has already been tested.
04047         */
04048         if ( t[FUNHEAD+3] < 0 ) {
04049             t[FUNHEAD+3] = -t[FUNHEAD+3];
04050             floatsign = -floatsign;
04051         }
04052         if ( ncoef < 0 ) floatsign = -floatsign;
04053     /*
04054         Copy to output;
04055     */
04056         AT.FloatPos = m-termout;
04057         i = t[1]; NCOPY(m,t,i)
04058     }
04059     else {
04060         PackFloat(m,aux4);
04061         if ( m[FUNHEAD+3] < 0 ) {
04062             m[FUNHEAD+3] = -m[FUNHEAD+3];
04063             floatsign = -floatsign;
04064         }
04065         if ( ncoef < 0 ) floatsign = -floatsign;
04066         AT.FloatPos = m-termout;
04067         m += m[1];
04068     }
04069 }
04070     else {
04071         if ( withfloat == 1 ) UnpackFloat(aux4,firstfloat);
04072         RatToFloat(aux5,(UWORD *)n_coef,nccoef);
04073         mpf_mul(aux4,aux4,aux5);
04074         PackFloat(m,aux4);
04075         AT.FloatPos = m-termout;
04076         if ( m[FUNHEAD+3] < 0 ) {

```

```

04077             m[FUNHEAD+3] = -m[FUNHEAD+3];
04078             floatsign = -floatsign;
04079         }
04080         m += m[1];
04081     }
04082     n_coef[0] = 1; n_coef[1] = 1; ncoef = floatsign;
04083 }
04084 else AT.FloatPos = 0;
04085 #endif
04086 /*
04087 #] float_ :
04088 #[ Do Replace_ :
04090 */
04091 stop = (WORD *) ((UBYTE *) (termout)) + AM.MaxTer;
04092 i = ABS(ncoef);
04093 if ( ( m + i ) > stop ) {
04094     MLOCK(ErrorMessageLock);
04095     MesPrint("Term too complex during normalization");
04096     MUNLOCK(ErrorMessageLock);
04097     goto NormMin;
04098 }
04099 if ( ReplaceType >= 0 ) {
04100     t = n_coef;
04101     i--;
04102     NCOPY(m,t,i);
04103     *m++ = ncoef;
04104     t = termout;
04105     *t = WORDDIF(m,t);
04106     if ( ReplaceType == 0 ) {
04107         AT.WorkPointer = termout+*termout;
04108         WildFill(BHEAD term,termout,AN.ReplaceScrat);
04109         termout = term + *term;
04110     }
04111     else {
04112         AT.WorkPointer = r = termout + *termout;
04113         WildFill(BHEAD r,termout,AN.ReplaceScrat);
04114         i = *r; m = term;
04115         NCOPY(m,r,i);
04116         termout = m;
04117
04118         r = m = term;
04119         r += *term; r -= ABS(r[-1]);
04120         m++;
04121         while ( m < r ) {
04122             if ( *m >= FUNCTION && m[1] > FUNHEAD &&
04123                 functions[*m-FUNCTION].spec != TENSORFUNCTION )
04124                 m[2] |= DIRTYFLAG;
04125             m += m[1];
04126         }
04127     }
04128 }
04129 /*
04130 The next 'reset' cannot be done. We still need the expression
04131 in the buffer. Note though that this may cause a runaway pointer
04132 if we are not very careful.
04133
04134 C->numrhs = oldtoprhs;
04135 C->Pointer = C->Buffer + oldcpointer;
04136 */
04137 TermFree(n_llnum,"n_llnum");
04138 TermFree(n_coef,"NormCoeef");
04139 return(1);
04140 }
04141 else {
04142     t = termout;
04143     k = WORDDIF(m,t);
04144     *t = k + i;
04145     m = term;
04146     NCOPY(m,t,k);
04147     i--;
04148     t = n_coef;
04149     NCOPY(m,t,i);
04150     *m++ = ncoef;
04151 }
04152 /*
04153 #] Do Replace_ :
04154 #[ Errors and Finish :
04155 */
04156 RegEnd:
04157 if ( termout < term + *term && termout >= term ) AT.WorkPointer = term + *term;
04158 else AT.WorkPointer = termout;
04159 /*
04160 if ( termflag ) { We have to assign the term to $variable(s)
04161     TermAssign(term);
04162 }
04163 */

```

```

04164     TermFree(n_llnum, "n_llnum");
04165     TermFree(n_coef, "NormCoef");
04166     return(regval);
04167
04168 NormInf:
04169     MLOCK(ErrorMessageLock);
04170     MesPrint("Division by zero during normalization");
04171     MUNLOCK(ErrorMessageLock);
04172     Terminate(-1);
04173
04174 NormZZ:
04175     MLOCK(ErrorMessageLock);
04176     MesPrint("0^0 during normalization of term");
04177     MUNLOCK(ErrorMessageLock);
04178     Terminate(-1);
04179
04180 NormPRF:
04181     MLOCK(ErrorMessageLock);
04182     MesPrint("0/0 in polyratfun during normalization of term");
04183     MUNLOCK(ErrorMessageLock);
04184     Terminate(-1);
04185
04186 NormZero:
04187     *term = 0;
04188     AT.WorkPointer = termout;
04189     TermFree(n_llnum, "n_llnum");
04190     TermFree(n_coef, "NormCoef");
04191     return(regval);
04192
04193 NormMin:
04194     TermFree(n_llnum, "n_llnum");
04195     TermFree(n_coef, "NormCoef");
04196     return(-1);
04197
04198 FromNorm:
04199     MLOCK(ErrorMessageLock);
04200     MesCall("Norm");
04201     MUNLOCK(ErrorMessageLock);
04202     TermFree(n_llnum, "n_llnum");
04203     TermFree(n_coef, "NormCoef");
04204     return(-1);
04205
04206 /*
04207 #] Errors and Finish :
04208 */
04209 }
04210
04211 /*
04212 #] Normalize :
04213 #[ ExtraSymbol :
04214 */
04215
04216 int ExtraSymbol(WORD sym, WORD pow, WORD nsym, WORD *ppsym, WORD *ncoef)
04217 {
04218     WORD *m, i;
04219     i = nsym;
04220     m = ppsym - 2;
04221     while ( i > 0 ) {
04222         if ( sym == *m ) {
04223             m++;
04224             if ( pow > 2*MAXPOWER || pow < -2*MAXPOWER
04225                 || *m > 2*MAXPOWER || *m < -2*MAXPOWER ) {
04226                 MLOCK(ErrorMessageLock);
04227                 MesPrint("Illegal wildcard power combination.");
04228                 MUNLOCK(ErrorMessageLock);
04229                 Terminate(-1);
04230             }
04231             *m += pow;
04232
04233             if ( ( sym <= NumSymbols && sym > -MAXPOWER )
04234                 && ( symbols[sym].complex & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY ) {
04235                 *m %= symbols[sym].maxpower;
04236                 if ( *m < 0 ) *m += symbols[sym].maxpower;
04237                 if ( ( symbols[sym].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
04238                     if ( ( ( symbols[sym].maxpower & 1 ) == 0 ) &&
04239                         ( *m >= symbols[sym].maxpower/2 ) ) {
04240                         *m -= symbols[sym].maxpower/2; *ncoef = -*ncoef;
04241                     }
04242                 }
04243             }
04244
04245             if ( *m >= 2*MAXPOWER || *m <= -2*MAXPOWER ) {
04246                 MLOCK(ErrorMessageLock);
04247                 MesPrint("Power overflow during normalization");
04248                 MUNLOCK(ErrorMessageLock);
04249                 return(-1);
04250             }

```



```

04251         if ( !*m ) {
04252             m--;
04253             while ( i < nsym )
04254                 { *m = m[2]; m++; *m = m[2]; m++; i++; }
04255             return(-1);
04256         }
04257         return(0);
04258     }
04259     else if ( sym < *m ) {
04260         m -= 2;
04261         i--;
04262     }
04263     else break;
04264 }
04265 m = ppsym;
04266 while ( i < nsym )
04267     { m--; m[2] = *m; m--; m[2] = *m; i++; }
04268 *m++ = sym;
04269 *m = pow;
04270 return(1);
04271 }
04272
04273 /*
04274     #] ExtraSymbol :
04275     #[ DoTheta :
04276 */
04277
04278 int DoTheta(PHEAD WORD *t)
04279 {
04280     GETBIDENTITY
04281     WORD k, *r1, *r2, *tstop, type;
04282     WORD ia, *ta, *tb, *stopa, *stopb;
04283     if ( AC.BracketNormalize ) return(-1);
04284     type = *t;
04285     k = t[1];
04286     tstop = t + k;
04287     t += FUNHEAD;
04288     if ( k <= FUNHEAD ) return(1);
04289     r1 = t;
04290     NEXTARG(r1)
04291     if ( r1 == tstop ) {
04292         /*
04293             One argument
04294         */
04295         if ( *t == ARGHEAD ) {
04296             if ( type == THETA ) return(1);
04297             else return(0); /* THETA2 */
04298         }
04299         if ( *t < 0 ) {
04300             if ( *t == -SNUMBER ) {
04301                 if ( t[1] < 0 ) return(0);
04302                 else {
04303                     if ( type == THETA2 && t[1] == 0 ) return(0);
04304                     else return(1);
04305                 }
04306             }
04307             return(-1);
04308         }
04309         k = t[*t-1];
04310         if ( *t == ABS(k)+1+ARGHEAD ) {
04311             if ( k > 0 ) return(1);
04312             else return(0);
04313         }
04314         return(-1);
04315     }
04316     /*
04317         At least two arguments
04318     */
04319     r2 = r1;
04320     NEXTARG(r2)
04321     if ( r2 < tstop ) return(-1); /* More than 2 arguments */
04322     /*
04323         Note now that zero has to be treated specially
04324         We take the criteria from the symmetrize routine
04325     */
04326     if ( *t == -SNUMBER && *r1 == -SNUMBER ) {
04327         if ( t[1] > r1[1] ) return(0);
04328         else if ( t[1] < r1[1] ) {
04329             return(1);
04330         }
04331         else if ( type == THETA ) return(1);
04332         else return(0); /* THETA2 */
04333     }
04334     else if ( t[1] == 0 && *t == -SNUMBER ) {
04335         if ( *r1 > 0 ) { }
04336         else if ( *t < *r1 ) return(1);
04337         else if ( *t > *r1 ) return(0);

```

```

04338     }
04339     else if ( r1[1] == 0 && *r1 == -SNUMBER ) {
04340         if ( *t > 0 ) { }
04341         else if ( *t < *r1 ) return(1);
04342         else if ( *t > *r1 ) return(0);
04343     }
04344     r2 = AT.WorkPointer;
04345     if ( *t < 0 ) {
04346         ta = r2;
04347         ToGeneral(t,ta,0);
04348         r2 += *r2;
04349     }
04350     else ta = t;
04351     if ( *r1 < 0 ) {
04352         tb = r2;
04353         ToGeneral(r1,tb,0);
04354     }
04355     else tb = r1;
04356     stopa = ta + *ta;
04357     stopb = tb + *tb;
04358     ta += ARGHEAD; tb += ARGHEAD;
04359     while ( ta < stopa ) {
04360         if ( tb >= stopb ) return(0);
04361         if ( ( ia = CompareTerms(BHEAD ta,tb,(WORD)1) ) < 0 ) return(0);
04362         if ( ia > 0 ) return(1);
04363         ta += *ta;
04364         tb += *tb;
04365     }
04366     if ( type == THETA ) return(1);
04367     else return(0); /* THETA2 */
04368 }
04369
04370 /*
04371     #] DoTheta :
04372     #[ DoDelta :
04373 */
04374
04375 int DoDelta(WORD *t)
04376 {
04377     WORD k, *r1, *r2, *tstop, isnum, isnum2, type = *t;
04378     if ( AC.BraceNormalize ) return(-1);
04379     k = t[1];
04380     if ( k <= FUNHEAD ) goto argzero;
04381     if ( k == FUNHEAD+ARGHEAD && t[FUNHEAD] == ARGHEAD ) goto argzero;
04382     tstop = t + k;
04383     t += FUNHEAD;
04384     r1 = t;
04385     NEXTARG(r1)
04386     if ( *t < 0 ) {
04387         k = 1;
04388         if ( *t == -SNUMBER ) { isnum = 1; k = t[1]; }
04389         else isnum = 0;
04390     }
04391     else {
04392         k = t[*t-1];
04393         k = ABS(k);
04394         if ( k == *t-ARGHEAD-1 ) isnum = 1;
04395         else isnum = 0;
04396         k = 1;
04397     }
04398     if ( r1 >= tstop ) { /* Single argument */
04399         if ( !isnum ) return(-1);
04400         if ( k == 0 ) goto argzero;
04401         goto argnonzero;
04402     }
04403     r2 = r1;
04404     NEXTARG(r2)
04405     if ( r2 < tstop ) return(-1);
04406     if ( *r1 < 0 ) {
04407         if ( *r1 == -SNUMBER ) { isnum2 = 1; }
04408         else isnum2 = 0;
04409     }
04410     else {
04411         k = r1[*r1-1];
04412         k = ABS(k);
04413         if ( k == *r1-ARGHEAD-1 ) isnum2 = 1;
04414         else isnum2 = 0;
04415     }
04416     if ( isnum != isnum2 ) return(-1);
04417     tstop = r1;
04418     while ( t < tstop && r1 < r2 ) {
04419         if ( *t != *r1 ) {
04420             if ( !isnum ) return(-1);
04421             goto argnonzero;
04422         }
04423         t++; r1++;
04424     }

```

```

04425     if ( t != tstop || r1 != r2 ) {
04426         if ( !isnum ) return(-1);
04427         goto argnonzero;
04428     }
04429 argzero:
04430     if ( type == DELTA2 ) return(1);
04431     else return(0);
04432 argnonzero:
04433     if ( type == DELTA2 ) return(0);
04434     else return(1);
04435 }
04436
04437 /*
04438     #] DoDelta :
04439     #[ DoRevert :
04440 */
04441 void DoRevert(WORD *fun, WORD *tmp)
04442 {
04443     WORD *t, *r, *m, *to, *tt, *mm, i, j;
04444     to = fun + fun[1];
04445     r = fun + FUNHEAD;
04446     while ( r < to ) {
04447         if ( *r <= 0 ) {
04448             if ( *r == -REVERSEFUNCTION ) {
04449                 m = r; mm = m+1;
04450                 while ( mm < to ) *m++ = *mm++;
04451                 to--;
04452                 (fun[1])--;
04453                 fun[2] |= DIRTYSYMFLAG;
04454             }
04455             else if ( *r <= -FUNCTION ) r++;
04456             else {
04457                 if ( *r == -INDEX && r[1] < MINSPEC ) *r = -VECTOR;
04458                 r += 2;
04459             }
04460         }
04461     }
04462     else {
04463         if ( ( *r > ARGHEAD )
04464             && ( r[ARGHEAD+1] == REVERSEFUNCTION )
04465             && ( *r == (r[ARGHEAD]+ARGHEAD) )
04466             && ( r[ARGHEAD] == (r[ARGHEAD+2]+4) )
04467             && ( *(r+r-3) == 1 )
04468             && ( *(r+r-2) == 1 )
04469             && ( *(r+r-1) == 3 ) ) {
04470             mm = r;
04471             r += ARGHEAD + 1;
04472             tt = r + r[1];
04473             r += FUNHEAD;
04474             m = tmp;
04475             t = r;
04476             j = 0;
04477             while ( t < tt ) {
04478                 NEXTARG(t)
04479                 j++;
04480             }
04481             while ( --j >= 0 ) {
04482                 i = j;
04483                 t = r;
04484                 while ( --i >= 0 ) {
04485                     NEXTARG(t)
04486                 }
04487                 if ( *t > 0 ) {
04488                     i = *t;
04489                     NCOPY(m,t,i);
04490                 }
04491                 else if ( *t <= -FUNCTION ) *m++ = *t++;
04492                 else { *m++ = *t++; *m++ = *t++; }
04493             }
04494             i = WORDDIF(m,tmp);
04495             m = tmp;
04496             t = mm;
04497             r = t + *t;
04498             NCOPY(t,m,i);
04499             m = r;
04500             r = t;
04501             i = WORDDIF(to,m);
04502             NCOPY(t,m,i);
04503             fun[1] = WORDDIF(t,fun);
04504             to = t;
04505             fun[2] |= DIRTYSYMFLAG;
04506         }
04507         else r += *r;
04508     }
04509 }
04510 }
04511

```

```

04512 /*
04513     #] DoRevert :
04514     #] Normalize :
04515     #[ DetCommu :
04516
04517     Determines the number of terms in an expression that contain
04518     noncommuting objects. This can be used to see whether products of
04519     this expression can be evaluated with binomial coefficients.
04520
04521     We don't try to be fancy. If a term contains noncommuting objects
04522     we are not looking whether they can commute with complete other
04523     terms.
04524
04525     If the number gets too large we cut it off.
04526 */
04527
04528 #define MAXNUMBEROFNONCOMTERMS 2
04529
04530 WORD DetCommu(WORD *terms)
04531 {
04532     WORD *t, *tnext, *tstop;
04533     WORD num = 0;
04534     if ( *terms == 0 ) return(0);
04535     if ( terms[*terms] == 0 ) return(0);
04536     t = terms;
04537     while ( *t ) {
04538         tnext = t + *t;
04539         tstop = tnext - ABS(tnext[-1]);
04540         t++;
04541         while ( t < tstop ) {
04542             if ( *t >= FUNCTION ) {
04543                 if ( functions[*t-FUNCTION].commute ) {
04544                     num++;
04545                     if ( num >= MAXNUMBEROFNONCOMTERMS ) return(num);
04546                     break;
04547                 }
04548             }
04549             else if ( *t == SUBEXPRESSION ) {
04550                 if ( cbuf[t[4]].CanCommu[t[2]] ) {
04551                     num++;
04552                     if ( num >= MAXNUMBEROFNONCOMTERMS ) return(num);
04553                     break;
04554                 }
04555             }
04556             else if ( *t == EXPRESSION ) {
04557                 num++;
04558                 if ( num >= MAXNUMBEROFNONCOMTERMS ) return(num);
04559                 break;
04560             }
04561             else if ( *t == DOLLAREXPRESSION ) {
04562 /*
04563         Technically this is not correct. We have to test first
04564         whether this is MODLOCAL (in TFORM) and if so, use the
04565         local version. Anyway, this should be rare to never
04566         occurring because dollars should be replaced.
04567 */
04568                 if ( cbuf[AM.dbufnum].CanCommu[t[2]] ) {
04569                     num++;
04570                     if ( num >= MAXNUMBEROFNONCOMTERMS ) return(num);
04571                     break;
04572                 }
04573             }
04574             t += t[1];
04575         }
04576         t = tnext;
04577     }
04578     return(num);
04579 }
04580
04581 /*
04582     #] DetCommu :
04583     #[ DoesCommu :
04584
04585     Determines the number of noncommuting objects in a term.
04586     If the number gets too large we cut it off.
04587 */
04588
04589 WORD DoesCommu(WORD *term)
04590 {
04591     WORD *tstop;
04592     WORD num = 0;
04593     if ( *term == 0 ) return(0);
04594     tstop = term + *term;
04595     tstop = tstop - ABS(tstop[-1]);
04596     term++;
04597     while ( term < tstop ) {
04598         if ( ( *term >= FUNCTION ) && ( functions[*term-FUNCTION].commute ) ) {

```

```

04599         num++;
04600         if ( num >= MAXNUMBEROFNONCOMTERMS ) return(num);
04601     }
04602     term += term[1];
04603 }
04604 return(num);
04605 }
04606
04607 /*
04608 #] DoesCommu :
04609 #[ PolyNormPoly :
04610
04611     Normalizes a polynomial
04612 */
04613
04614 #ifdef EVALUATEGCD
04615 WORD *PolyNormPoly (PHEAD WORD *Poly) {
04616
04617     GETBIDENTITY;
04618     WORD *buffer = AT.WorkPointer;
04619     WORD *p;
04620     if ( NewSort(BHEAD0) ) { Terminate(-1); }
04621     AR.CompareRoutine = (COMPAREDUMMY)(&CompareSymbols);
04622     while ( *Poly ) {
04623         p = Poly + *Poly;
04624         if ( SymbolNormalize(Poly) < 0 ) return(0);
04625         if ( StoreTerm(BHEAD Poly) ) {
04626             AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
04627             LowerSortLevel();
04628             Terminate(-1);
04629         }
04630         Poly = p;
04631     }
04632     if ( EndSort(BHEAD buffer,1) < 0 ) {
04633         AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
04634         Terminate(-1);
04635     }
04636     p = buffer;
04637     while ( *p ) p += *p;
04638     AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
04639     AT.WorkPointer = p + 1;
04640     return(buffer);
04641 }
04642 #endif
04643
04644 /*
04645 #] PolyNormPoly :
04646 #[ EvaluateGcd :
04647
04648     Try to evaluate the GCDFUNCTION gcd_.
04649     This function can have a number of arguments which can be numbers
04650     and/or polynomials. If there are objects that aren't SYMBOLS or numbers
04651     it cannot work currently.
04652
04653     To make this work properly we have to intervene in proces.c
04654     proces.c:         if ( Normalize(BHEAD m) ) {
04655 1060 proces.c:         if ( Normalize(BHEAD r) ) {
04656 1126?proces.c:         if ( Normalize(BHEAD term) ) {
04657     proces.c:         if ( Normalize(BHEAD AT.WorkPointer) ) goto PasErr;
04658 2308!proces.c:     if ( ( retnorm = Normalize(BHEAD term) ) != 0 ) {
04659     proces.c:         ReNumber(BHEAD term); Normalize(BHEAD term);
04660     proces.c:         if ( Normalize(BHEAD v) ) Terminate(-1);
04661     proces.c:         if ( Normalize(BHEAD w) ) { LowerSortLevel(); goto PolyCall; }
04662     proces.c:         if ( Normalize(BHEAD term) ) goto PolyCall;
04663 */
04664 #ifdef EVALUATEGCD
04665
04666 WORD *EvaluateGcd(PHEAD WORD *subterm)
04667 {
04668     GETBIDENTITY
04669     WORD *oldworkpointer = AT.WorkPointer, *work1, *work2, *work3;
04670     WORD *t, *tt, *ttt, *t1, *t2, *t3, *t4, *tstop;
04671     WORD ct, nnum;
04672     UWORD gcdnum, stor;
04673     WORD *lnum=n_llnum+1;
04674     WORD *num1, *num2, *num3, *den1, *den2, *den3;
04675     WORD sizenum1, sizenum2, sizenum3, sizeden1, sizeden2, sizeden3;
04676     int i, isnumeric = 0, numarg = 0 /*, sizearg */;
04677     LONG size;
04678 /*
04679     Step 1: Look for -SNUMBER or -SYMBOL arguments.
04680         If encountered, treat everybody with it.
04681 */
04682     tt = subterm + subterm[1]; t = subterm + FUNHEAD;
04683
04684     while ( t < tt ) {
04685         numarg++;

```

```

04686         if ( *t == -SNUMBER ) {
04687             if ( t[1] == 0 ) {
04688 gcdzero;;
04689                 MLOCK(ErrorMessageLock);
04690                 MesPrint("Trying to take the GCD involving a zero term.");
04691                 MUNLOCK(ErrorMessageLock);
04692                 return(0);
04693             }
04694             gcdnum = ABS(t[1]);
04695             t1 = subterm + FUNHEAD;
04696             while ( gcdnum > 1 && t1 < tt ) {
04697                 if ( *t1 == -SNUMBER ) {
04698                     stor = ABS(t1[1]);
04699                     if ( stor == 0 ) goto gcdzero;
04700                     if ( GcdLong(BHEAD (UWORD *)&stor,1,(UWORD *)&gcdnum,1,
04701                         (UWORD *)lnum,&nnum) ) goto FromGCD;
04702                     gcdnum = lnum[0];
04703                     t1 += 2;
04704                     continue;
04705                 }
04706                 else if ( *t1 == -SYMBOL ) goto gcdisone;
04707                 else if ( *t1 < 0 ) goto gcdillegal;
04708 /*
04709             Now we have to go through all the terms in the argument.
04710             This includes long numbers.
04711 */
04712             ttt = t1 + *t1;
04713             ct = *ttt; *ttt = 0;
04714             if ( t1[1] != 0 ) { /* First normalize the argument */
04715                 t1 = PolyNormPoly(BHEAD t1+ARGHEAD);
04716             }
04717             else t1 += ARGHEAD;
04718             while ( *t1 ) {
04719                 t1 += *t1;
04720                 i = ABS(t1[-1]);
04721                 t2 = t1 - i;
04722                 i = (i-1)/2;
04723                 t3 = t2+i-1;
04724                 while ( t3 > t2 && *t3 == 0 ) { t3--; i--; }
04725                 if ( GcdLong(BHEAD (UWORD *)t2,(WORD)i,(UWORD *)&gcdnum,1,
04726                     (UWORD *)lnum,&nnum) ) {
04727                     *ttt = ct;
04728                     goto FromGCD;
04729                 }
04730                 gcdnum = lnum[0];
04731                 if ( gcdnum == 1 ) {
04732                     *ttt = ct;
04733                     goto gcdisone;
04734                 }
04735             }
04736             *ttt = ct;
04737             t1 = ttt;
04738             AT.WorkPointer = oldworkpointer;
04739         }
04740         if ( gcdnum == 1 ) goto gcdisone;
04741         oldworkpointer[0] = 4;
04742         oldworkpointer[1] = gcdnum;
04743         oldworkpointer[2] = 1;
04744         oldworkpointer[3] = 3;
04745         oldworkpointer[4] = 0;
04746         AT.WorkPointer = oldworkpointer + 5;
04747         return(oldworkpointer);
04748     }
04749     else if ( *t == -SYMBOL ) {
04750         t1 = subterm + FUNHEAD;
04751         i = t[1];
04752         while ( t1 < tt ) {
04753             if ( *t1 == -SNUMBER ) goto gcdisone;
04754             if ( *t1 == -SYMBOL ) {
04755                 if ( t1[1] != i ) goto gcdisone;
04756                 t1 += 2; continue;
04757             }
04758             if ( *t1 < 0 ) goto gcdillegal;
04759             ttt = t1 + *t1;
04760             ct = *ttt; *ttt = 0;
04761             if ( t1[1] != 0 ) { /* First normalize the argument */
04762                 t2 = PolyNormPoly(BHEAD t1+ARGHEAD);
04763             }
04764             else t2 = t1 + ARGHEAD;
04765             while ( *t2 ) {
04766                 t3 = t2+1;
04767                 t2 = t2 + *t2;
04768                 tstop = t2 - ABS(t2[-1]);
04769                 while ( t3 < tstop ) {
04770                     if ( *t3 != SYMBOL ) {
04771                         *ttt = ct;
04772                         goto gcdillegal;

```

```

04773         }
04774         t4 = t3 + 2;
04775         t3 += t3[1];
04776         while ( t4 < t3 ) {
04777             if ( *t4 == i && t4[1] > 0 ) goto nextterminarg;
04778             t4 += 2;
04779         }
04780     }
04781     *ttt = ct;
04782     goto gcdisone;
04783 nextterminarg:;
04784     }
04785     *ttt = ct;
04786     t1 = ttt;
04787     AT.WorkPointer = oldworkpointer;
04788     }
04789     oldworkpointer[0] = 8;
04790     oldworkpointer[1] = SYMBOL;
04791     oldworkpointer[2] = 4;
04792     oldworkpointer[3] = t[1];
04793     oldworkpointer[4] = 1;
04794     oldworkpointer[5] = 1;
04795     oldworkpointer[6] = 1;
04796     oldworkpointer[7] = 3;
04797     oldworkpointer[8] = 0;
04798     AT.WorkPointer = oldworkpointer+9;
04799     return(oldworkpointer);
04800 }
04801 else if ( *t < 0 ) {
04802 gcdillegal:;
04803     MLOCK(ErrorMessageLock);
04804     MesPrint("Illegal object in gcd_ function. Object not a number or a symbol.");
04805     MUNLOCK(ErrorMessageLock);
04806     goto FromGCD;
04807 }
04808 else if ( ABS(t[*t-1]) == *t-ARGHEAD-1 ) isnumeric = numarg;
04809 else if ( t[1] != 0 ) {
04810     ttt = t + *t; ct = *ttt; *ttt = 0;
04811     t = PolyNormPoly(BHEAD t+ARGHEAD);
04812     *ttt = ct;
04813     if ( t[*t] == 0 && ABS(t[*t-1]) == *t-ARGHEAD-1 ) isnumeric = numarg;
04814     AT.WorkPointer = oldworkpointer;
04815     t = ttt;
04816 }
04817 t += *t;
04818 }
04819 /*
04820 At this point there are only generic arguments.
04821 There are however still two cases:
04822 1: There is an argument that is purely numerical
04823    In that case we have to take the gcd of all coefficients
04824 2: All arguments are nontrivial polynomials.
04825    Here we don't worry so much about the factor. (???)
04826 We know whether case 1 occurs when isnumeric > 0.
04827 We can look up numarg to get a good starting value.
04828 */
04829 AT.WorkPointer = oldworkpointer;
04830 if ( isnumeric ) {
04831     t = subterm + FUNHEAD;
04832     for ( i = 1; i < isnumeric; i++ ) {
04833         NEXTARG(t);
04834     }
04835     if ( t[1] != 0 ) { /* First normalize the argument */
04836         ttt = t + *t; ct = *ttt; *ttt = 0;
04837         t = PolyNormPoly(BHEAD t+ARGHEAD);
04838         *ttt = ct;
04839     }
04840     t += *t;
04841     i = (ABS(t[-1])-1)/2;
04842     den1 = t - 1 - i;
04843     num1 = den1 - i;
04844     sizenum1 = sizeden1 = i;
04845     while ( sizenum1 > 1 && num1[sizenum1-1] == 0 ) sizenum1--;
04846     while ( sizeden1 > 1 && den1[sizeden1-1] == 0 ) sizeden1--;
04847     work1 = AT.WorkPointer+1; work2 = work1+sizenum1;
04848     for ( i = 0; i < sizenum1; i++ ) work1[i] = num1[i];
04849     for ( i = 0; i < sizeden1; i++ ) work2[i] = den1[i];
04850     num1 = work1; den1 = work2;
04851     AT.WorkPointer = work2 = work2 + sizeden1;
04852     t = subterm + FUNHEAD;
04853     while ( t < tt ) {
04854         ttt = t + *t; ct = *ttt; *ttt = 0;
04855         if ( t[1] != 0 ) {
04856             t = PolyNormPoly(BHEAD t+ARGHEAD);
04857         }
04858         else t += ARGHEAD;
04859         while ( *t ) {

```

```

04860         t += *t;
04861         i = (ABS(t[-1])-1)/2;
04862         den2 = t - 1 - i;
04863         num2 = den2 - i;
04864         sizenum2 = sizeden2 = i;
04865         while ( sizenum2 > 1 && num2[sizenum2-1] == 0 ) sizenum2--;
04866         while ( sizeden2 > 1 && den2[sizeden2-1] == 0 ) sizeden2--;
04867         num3 = AT.WorkPointer;
04868         if ( GcdLong(BHEAD *(UWORD *)num2,sizenum2,(UWORD *)num1,sizenum1,
04869                     (UWORD *)num3,&sizenum3) ) goto FromGCD;
04870         sizenum1 = sizenum3;
04871         for ( i = 0; i < sizenum1; i++ ) num1[i] = num3[i];
04872         den3 = AT.WorkPointer;
04873         if ( GcdLong(BHEAD *(UWORD *)den2,sizeden2,(UWORD *)den1,sizeden1,
04874                     (UWORD *)den3,&sizeden3) ) goto FromGCD;
04875         sizeden1 = sizeden3;
04876         for ( i = 0; i < sizeden1; i++ ) den1[i] = den3[i];
04877         if ( sizenum1 == 1 && num1[0] == 1 && sizeden1 == 1 && den1[1] == 1 )
04878             goto gcdisone;
04879     }
04880     *ttt = ct;
04881     t = ttt;
04882     AT.WorkPointer = work2;
04883 }
04884 AT.WorkPointer = oldworkpointer;
04885 /*
04886     Now copy the GCD to the 'output'
04887 */
04888     if ( sizenum1 > sizeden1 ) {
04889         while ( sizenum1 > sizeden1 ) den1[sizeden1++] = 0;
04890     }
04891     else if ( sizenum1 < sizeden1 ) {
04892         while ( sizeden1 < sizenum1 ) num1[sizenum1++] = 0;
04893     }
04894     t = oldworkpointer;
04895     i = 2*sizenum1+1;
04896     *t++ = i+1;
04897     if ( num1 != t ) { NCOPY(t,num1,sizenum1); }
04898     else t += sizenum1;
04899     if ( den1 != t ) { NCOPY(t,den1,sizeden1); }
04900     else t += sizeden1;
04901     *t++ = i;
04902     *t++ = 0;
04903     AT.WorkPointer = t;
04904     return(oldworkpointer);
04905 }
04906 /*
04907     Now the real stuff with only polynomials.
04908     Pick up the shortest term to start.
04909     We are a bit brutish about this.
04910 */
04911     t = subterm + FUNHEAD;
04912     AT.WorkPointer += AM.MaxTer/sizeof(WORD);
04913     work2 = AT.WorkPointer;
04914 /*
04915     sizearg = subterm[1];
04916 */
04917     i = 0; work3 = 0;
04918     while ( t < tt ) {
04919         i++;
04920         work1 = AT.WorkPointer;
04921         ttt = t + *t; ct = *ttt; *ttt = 0;
04922         t = PolyNormPoly(BHEAD t+ARGHEAD);
04923         if ( *work1 < AT.WorkPointer-work1 ) {
04924 /*
04925             sizearg = AT.WorkPointer-work1;
04926 */
04927             numarg = i;
04928             work3 = work1;
04929         }
04930         *ttt = ct; t = ttt;
04931     }
04932     *AT.WorkPointer++ = 0;
04933 /*
04934     We have properly normalized arguments and the shortest is indicated in work3
04935 */
04936     work1 = work3;
04937     while ( *work2 ) {
04938         if ( work2 != work3 ) {
04939             work1 = PolyGCD2(BHEAD work1,work2);
04940         }
04941         while ( *work2 ) work2 += *work2;
04942         work2++;
04943     }
04944     work2 = work1;
04945     while ( *work2 ) work2 += *work2;
04946     size = work2 - work1 + 1;

```



```

04947     t = oldworkpointer;
04948     NCOPY(t,work1,size);
04949     AT.WorkPointer = t;
04950     return(oldworkpointer);
04951
04952 gcdisone;;
04953     oldworkpointer[0] = 4;
04954     oldworkpointer[1] = 1;
04955     oldworkpointer[2] = 1;
04956     oldworkpointer[3] = 3;
04957     oldworkpointer[4] = 0;
04958     AT.WorkPointer = oldworkpointer+5;
04959     return(oldworkpointer);
04960 FromGCD:
04961     MLOCK(ErrorMessageLock);
04962     MesCall("EvaluateGcd");
04963     MUNLOCK(ErrorMessageLock);
04964     return(0);
04965 }
04966
04967 #endif
04968
04969 /*
04970  #] EvaluateGcd :
04971  #[ TreatPolyRatFun :
04972
04973  if ( AR.PolyFunExp == 1 ) we have to trim the contents of the polyratfun
04974  down to its most divergent term and give it coefficient +1. This is done
04975  by taking the terms with the least power in the variable in the numerator
04976  and in the denominator and then combine them.
04977  Answer is either PolyRatFun(ep^n,1) or PolyRatFun(1,1) or PolyRatFun(1,ep^n)
04978  */
04979
04980 int TreatPolyRatFun(PHEAD WORD *prf)
04981 {
04982     WORD *t, *tstop, *r, *rstop, *m, *mstop;
04983     WORD exp1 = MAXPOWER, exp2 = MAXPOWER;
04984     t = prf+FUNHEAD;
04985     if ( *t < 0 ) {
04986         if ( *t == -SYMBOL && t[1] == AR.PolyFunVar ) {
04987             if ( exp1 > 1 ) exp1 = 1;
04988             t += 2;
04989         }
04990         else {
04991             if ( exp1 > 0 ) exp1 = 0;
04992             NEXTARG(t)
04993         }
04994     }
04995     else {
04996         tstop = t + *t;
04997         t += ARGHEAD;
04998         while ( t < tstop ) {
04999             /*
05000              Now look for the minimum power of AR.PolyFunVar
05001             */
05002             r = t+1;
05003             t += *t;
05004             rstop = t - ABS(t[-1]);
05005             while ( r < rstop ) {
05006                 if ( *r != SYMBOL ) { r += r[1]; continue; }
05007                 m = r;
05008                 mstop = m + m[1];
05009                 m += 2;
05010                 while ( m < mstop ) {
05011                     if ( *m == AR.PolyFunVar ) {
05012                         if ( m[1] < exp1 ) exp1 = m[1];
05013                         break;
05014                     }
05015                     m += 2;
05016                 }
05017                 if ( m == mstop ) {
05018                     if ( exp1 > 0 ) exp1 = 0;
05019                 }
05020                 break;
05021             }
05022             if ( r == rstop ) {
05023                 if ( exp1 > 0 ) exp1 = 0;
05024             }
05025         }
05026         t = tstop;
05027     }
05028     if ( *t < 0 ) {
05029         if ( *t == -SYMBOL && t[1] == AR.PolyFunVar ) {
05030             if ( exp2 > 1 ) exp2 = 1;
05031         }
05032         else {
05033             if ( exp2 > 0 ) exp2 = 0;

```

```

05034     }
05035 }
05036 else {
05037     tstop = t + *t;
05038     t += ARGHEAD;
05039     while ( t < tstop ) {
05040 /*
05041         Now look for the minimum power of AR.PolyFunVar
05042 */
05043         r = t+1;
05044         t += *t;
05045         rstop = t - ABS(t[-1]);
05046         while ( r < rstop ) {
05047             if ( *r != SYMBOL ) { r += r[1]; continue; }
05048             m = r;
05049             mstop = m + m[1];
05050             m += 2;
05051             while ( m < mstop ) {
05052                 if ( *m == AR.PolyFunVar ) {
05053                     if ( m[1] < exp2 ) exp2 = m[1];
05054                     break;
05055                 }
05056                 m += 2;
05057             }
05058             if ( m == mstop ) {
05059                 if ( exp2 > 0 ) exp2 = 0;
05060             }
05061             break;
05062         }
05063         if ( r == rstop ) {
05064             if ( exp2 > 0 ) exp2 = 0;
05065         }
05066     }
05067 }
05068 /*
05069     Now we can compose the output.
05070     Notice that the output can never be longer than the input provided
05071     we never can have arguments that consist of just a function.
05072 */
05073 exp1 = exp1-exp2;
05074 /* if ( exp1 > 0 ) exp1 = 0; */
05075 t = prf+FUNHEAD;
05076 if ( exp1 == 0 ) {
05077     *t++ = -SNUMBER; *t++ = 1;
05078     *t++ = -SNUMBER; *t++ = 1;
05079 }
05080 else if ( exp1 > 0 ) {
05081     if ( exp1 == 1 ) {
05082         *t++ = -SYMBOL; *t++ = AR.PolyFunVar;
05083     }
05084     else {
05085         *t++ = 8+ARGHEAD;
05086         *t++ = 0;
05087         FILLARG(t);
05088         *t++ = 8; *t++ = SYMBOL; *t++ = 4; *t++ = AR.PolyFunVar;
05089         *t++ = exp1; *t++ = 1; *t++ = 1; *t++ = 3;
05090     }
05091     *t++ = -SNUMBER; *t++ = 1;
05092 }
05093 else {
05094     *t++ = -SNUMBER; *t++ = 1;
05095     if ( exp1 == -1 ) {
05096         *t++ = -SYMBOL; *t++ = AR.PolyFunVar;
05097     }
05098     else {
05099         *t++ = 8+ARGHEAD;
05100         *t++ = 0;
05101         FILLARG(t);
05102         *t++ = 8; *t++ = SYMBOL; *t++ = 4; *t++ = AR.PolyFunVar;
05103         *t++ = -exp1; *t++ = 1; *t++ = 1; *t++ = 3;
05104     }
05105 }
05106 prf[2] = 0; /* Clean */
05107 prf[1] = t - prf;
05108 return(0);
05109 }
05110
05111 /*
05112     #] TreatPolyRatFun :
05113     #[ DropCoefficient :
05114 */
05115
05116 void DropCoefficient(PHEAD WORD *term)
05117 {
05118     GETBIDENTITY
05119     WORD *t = term + *term;
05120     WORD n, na;

```

```

05121     n = t[-1]; na = ABS(n);
05122     t -= na;
05123     if ( n == 3 && t[0] == 1 && t[1] == 1 ) return;
05124     *AN.RepPoint = 1;
05125     t[0] = 1; t[1] = 1; t[2] = 3;
05126     *term -= (na-3);
05127 }
05128
05129 /*
05130 #] DropCoefficient :
05131 #[ DropSymbols :
05132 */
05133
05134 void DropSymbols(PHEAD WORD *term)
05135 {
05136     GETBIDENTITY
05137     WORD *tend = term + *term, *t1, *t2, *tstop;
05138     tstop = tend - ABS(tend[-1]);
05139     t1 = term+1;
05140     while ( t1 < tstop ) {
05141         if ( *t1 == SYMBOL ) {
05142             *AN.RepPoint = 1;
05143             t2 = t1+t1[1];
05144             while ( t2 < tend ) *t1++ = *t2++;
05145             *term = t1 - term;
05146             break;
05147         }
05148         t1 += t1[1];
05149     }
05150 }
05151
05152 /*
05153 #] DropSymbols :
05154 #[ SymbolNormalize :
05155 */
05164 int SymbolNormalize(WORD *term)
05165 {
05166     GETBIDENTITY
05167     WORD buffer[7*NORMSIZE], *t, *b, *bb, *tt, *m, *tstop;
05168     int i;
05169     b = buffer;
05170     *b++ = SYMBOL; *b++ = 2;
05171     t = term + *term;
05172     tstop = t - ABS(t[-1]);
05173     t = term + 1;
05174     while ( t < tstop ) { /* Step 1: collect symbols */
05175         if ( *t == SYMBOL && t < tstop ) {
05176             for ( i = 2; i < t[1]; i += 2 ) {
05177                 bb = buffer+2;
05178                 while ( bb < b ) {
05179                     if ( bb[0] == t[i] ) { /* add powers */
05180                         bb[1] += t[i+1];
05181                         if ( bb[1] > MAXPOWER || bb[1] < -MAXPOWER ) {
05182                             MLOCK(ErrorMessageLock);
05183                             MesPrint("Power in SymbolNormalize out of range");
05184                             MUNLOCK(ErrorMessageLock);
05185                             return(-1);
05186                         }
05187                     }
05188                     if ( bb[1] == 0 ) {
05189                         b -= 2;
05190                         while ( bb < b ) {
05191                             bb[0] = bb[2]; bb[1] = bb[3]; bb += 2;
05192                         }
05193                         goto Nexti;
05194                     }
05195                     else if ( bb[0] > t[i] ) { /* insert it */
05196                         m = b;
05197                         while ( m > bb ) { m[1] = m[-1]; m[0] = m[-2]; m -= 2; }
05198                         b += 2;
05199                         bb[0] = t[i];
05200                         bb[1] = t[i+1];
05201                         goto Nexti;
05202                     }
05203                     bb += 2;
05204                 }
05205                 if ( bb >= b ) { /* add it to the end */
05206                     *b++ = t[i]; *b++ = t[i+1];
05207                 }
05208             Nexti;
05209         }
05210     }
05211     else {
05212         MLOCK(ErrorMessageLock);
05213         MesPrint("Illegal term in SymbolNormalize");
05214         MUNLOCK(ErrorMessageLock);
05215         return(-1);

```

```

05216     }
05217     t += t[1];
05218     }
05219     buffer[1] = b - buffer;
05220 /*
05221     Veto negative powers
05222 */
05223     if ( AT.LeaveNegative == 0 ) {
05224         b = buffer; bb = b + b[1]; b += 3;
05225         while ( b < bb ) {
05226             if ( *b < 0 ) {
05227                 MLOCK(ErrorMessageLock);
05228                 MesPrint("Negative power in SymbolNormalize");
05229                 MUNLOCK(ErrorMessageLock);
05230                 return(-1);
05231             }
05232             b += 2;
05233         }
05234     }
05235 /*
05236     Now we use the fact that the new term will not be longer than the old one
05237     Actually it should be shorter when there is more than one subterm!
05238     Copy back.
05239 */
05240     i = buffer[1];
05241     b = buffer; tt = term + 1;
05242     if ( i > 2 ) { NCOPY(tt,b,i) }
05243     if ( tt < tstop ) {
05244         i = term[*term-1];
05245         if ( i < 0 ) i = -i;
05246         *term -= (tstop-tt);
05247         NCOPY(tt,tstop,i)
05248     }
05249     return(0);
05250 }
05251
05252 /*
05253     #] SymbolNormalize :
05254     #[ TestFunFlag :
05255
05256     Tests whether a function still has unsubstituted subexpressions
05257     This function has its dirtyflag on!
05258 */
05259 int TestFunFlag(PHEAD WORD *tfun)
05260 {
05261     WORD *t, *tstop, *r, *rstop, *m, *mstop;
05262     if ( functions[*tfun-FUNCTION].spec <= 0 ) return(0);
05263     tstop = tfun + tfun[1];
05264     t = tfun + FUNHEAD;
05265     while ( t < tstop ) {
05266         if ( *t < 0 ) { NEXTARG(t); continue; }
05267         rstop = t + *t;
05268         if ( t[1] == 0 ) { t = rstop; continue; }
05269         r = t + ARGHEAD;
05270         while ( r < rstop ) { /* Here we loop over terms */
05271             m = r+1; mstop = r+*r; mstop -= ABS(mstop[-1]);
05272             while ( m < mstop ) { /* Loop over the subterms */
05273                 if ( *m == SUBEXPRESSION || *m == EXPRESSION || *m == DOLLAREXPRESSION ) return(1);
05274                 if ( ( *m >= FUNCTION ) && ( m[2] & DIRTYFLAG ) == DIRTYFLAG )
05275                     && ( *m != REPLACEMENT ) && TestFunFlag(BHEAD m) ) return(1);
05276                 m += m[1];
05277             }
05278             r += *r;
05279         }
05280         t += *t;
05281     }
05282     return(0);
05283 }
05284
05285 /*
05286     #] TestFunFlag :
05287     #[ BracketNormalize :
05288 */
05289 int BracketNormalize(PHEAD WORD *term)
05290 {
05291     WORD *stop = term+*term-3, *t, *tt, *tstart, *r;
05292     WORD *oldwork = AT.WorkPointer;
05293     WORD *termout;
05294     WORD i, ii, j;
05295     termout = AT.WorkPointer = term+*term;
05296 /*
05297     First collect all functions and sort them
05298 */
05299     tt = termout+1; t = term+1;
05300     while ( t < stop ) {

```

```

05303         if ( *t >= FUNCTION ) { i = t[1]; NCOPY(tt,t,i); }
05304         else t += t[1];
05305     }
05306     if ( tt > termout+1 && tt-termout-1 > termout[2] ) { /* sorting */
05307         r = termout+1; ii = tt-r;
05308         for ( i = 0; i < ii-FUNHEAD; i += FUNHEAD ) { /* Bubble sort */
05309             for ( j = i+FUNHEAD; j > 0; j -= FUNHEAD ) {
05310                 if ( functions[r[j-FUNHEAD]-FUNCTION].commute
05311                     && functions[r[j]-FUNCTION].commute == 0 ) break;
05312                 if ( r[j-FUNHEAD] > r[j] ) EXCH(r[j-FUNHEAD],r[j])
05313                 else break;
05314             }
05315         }
05316     }
05317     tstart = tt; t = term + 1; *tt++ = DELTA; *tt++ = 2;
05318     while ( t < stop ) {
05319         if ( *t == DELTA ) { i = t[1]-2; t += 2; tstart[1] += i; NCOPY(tt,t,i); }
05320         else t += t[1];
05321     }
05322     if ( tstart[1] > 2 ) {
05323         for ( r = tstart+2; r < tstart+tstart[1]; r += 2 ) {
05324             if ( r[0] > r[1] ) EXCH(r[0],r[1])
05325         }
05326     }
05327     if ( tstart[1] > 4 ) { /* sorting */
05328         r = tstart+2; ii = tstart[1]-2;
05329         for ( i = 0; i < ii-2; i += 2 ) { /* Bubble sort */
05330             for ( j = i+2; j > 0; j -= 2 ) {
05331                 if ( r[j-2] > r[j] ) {
05332                     EXCH(r[j-2],r[j])
05333                     EXCH(r[j-1],r[j+1])
05334                 }
05335                 else if ( r[j-2] < r[j] ) break;
05336                 else {
05337                     if ( r[j-1] > r[j+1] ) EXCH(r[j-1],r[j+1])
05338                     else break;
05339                 }
05340             }
05341         }
05342     }
05343     tt = tstart+tstart[1];
05344 }
05345 else if ( tstart[1] == 2 ) { tt = tstart; }
05346 else tt = tstart+4;
05347
05348 tstart = tt; t = term + 1; *tt++ = INDEX; *tt++ = 2;
05349 while ( t < stop ) {
05350     if ( *t == INDEX ) { i = t[1]-2; t += 2; tstart[1] += i; NCOPY(tt,t,i); }
05351     else t += t[1];
05352 }
05353 if ( tstart[1] >= 4 ) { /* sorting */
05354     r = tstart+2; ii = tstart[1]-2;
05355     for ( i = 0; i < ii-1; i += 1 ) { /* Bubble sort */
05356         for ( j = i+1; j > 0; j -= 1 ) {
05357             if ( r[j-1] > r[j] ) EXCH(r[j-1],r[j])
05358             else break;
05359         }
05360     }
05361     tt = tstart+tstart[1];
05362 }
05363 else if ( tstart[1] == 2 ) { tt = tstart; }
05364 else tt = tstart+3;
05365
05366 tstart = tt; t = term + 1; *tt++ = DOTPRODUCT; *tt++ = 2;
05367 while ( t < stop ) {
05368     if ( *t == DOTPRODUCT ) { i = t[1]-2; t += 2; tstart[1] += i; NCOPY(tt,t,i); }
05369     else t += t[1];
05370 }
05371 if ( tstart[1] > 5 ) { /* sorting */
05372     r = tstart+2; ii = tstart[1]-2;
05373     for ( i = 0; i < ii; i += 3 ) {
05374         if ( r[i] > r[i+1] ) EXCH(r[i],r[i+1])
05375     }
05376     for ( i = 0; i < ii-3; i += 3 ) { /* Bubble sort */
05377         for ( j = i+3; j > 0; j -= 3 ) {
05378             if ( r[j-3] < r[j] ) break;
05379             if ( r[j-3] > r[j] ) {
05380                 EXCH(r[j-3],r[j])
05381                 EXCH(r[j-2],r[j+1])
05382             }
05383             else {
05384                 if ( r[j-2] > r[j+1] ) EXCH(r[j-2],r[j+1])
05385                 else break;
05386             }
05387         }
05388     }
05389     tt = tstart+tstart[1];

```

```


05390     }
05391     else if ( tstart[1] == 2 ) { tt = tstart; }
05392     else {
05393         if ( tstart[2] > tstart[3] ) EXCH(tstart[2],tstart[3])
05394         tt = tstart+5;
05395     }
05396
05397     tstart = tt; t = term + 1; *tt++ = SYMBOL; *tt++ = 2;
05398     while ( t < stop ) {
05399         if ( *t == SYMBOL ) { i = t[1]-2; t += 2; tstart[1] += i; NCOPY(tt,t,i); }
05400         else t += t[1];
05401     }
05402     if ( tstart[1] > 4 ) { /* sorting */
05403         r = tstart+2; ii = tstart[1]-2;
05404         for ( i = 0; i < ii-2; i += 2 ) { /* Bubble sort */
05405             for ( j = i+2; j > 0; j -= 2 ) {
05406                 if ( r[j-2] > r[j] ) EXCH(r[j-2],r[j])
05407                 else break;
05408             }
05409         }
05410         tt = tstart+tstart[1];
05411     }
05412     else if ( tstart[1] == 2 ) { tt = tstart; }
05413     else tt = tstart+4;
05414
05415     tstart = tt; t = term + 1; *tt++ = SETSET; *tt++ = 2;
05416     while ( t < stop ) {
05417         if ( *t == SETSET ) { i = t[1]-2; t += 2; tstart[1] += i; NCOPY(tt,t,i); }
05418         else t += t[1];
05419     }
05420     if ( tstart[1] > 4 ) { /* sorting */
05421         r = tstart+2; ii = tstart[1]-2;
05422         for ( i = 0; i < ii-2; i += 2 ) { /* Bubble sort */
05423             for ( j = i+2; j > 0; j -= 2 ) {
05424                 if ( r[j-2] > r[j] ) {
05425                     EXCH(r[j-2],r[j])
05426                     EXCH(r[j-1],r[j+1])
05427                 }
05428                 else break;
05429             }
05430         }
05431         tt = tstart+tstart[1];
05432     }
05433     else if ( tstart[1] == 2 ) { tt = tstart; }
05434     else tt = tstart+4;
05435     *tt++ = 1; *tt++ = 1; *tt++ = 3;
05436     t = term; i = *termout = tt - termout; tt = termout;
05437     NCOPY(t,tt,i);
05438     AT.WorkPointer = oldwork;
05439     return(0);
05440 }
05441
05442 /*
05443 #] BracketNormalize :
05444 */

```

4.91 notation.c File Reference

```
#include "form3.h"
```

Include dependency graph for notation.c:

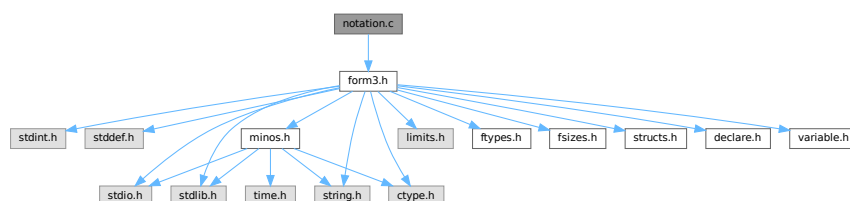

Functions

- int [NormPolyTerm](#) (PHEAD WORD *term)

- int [ConvertToPoly](#) (PHEAD WORD *term, WORD *outterm, WORD *comlist, WORD par)
- int [LocalConvertToPoly](#) (PHEAD WORD *term, WORD *outterm, WORD startebuf, WORD par)
- int [ConvertFromPoly](#) (PHEAD WORD *term, WORD *outterm, WORD from, WORD to, WORD offset, WORD par)
- int [FindSubterm](#) (WORD *subterm)
- int [FindLocalSubterm](#) (PHEAD WORD *subterm, WORD startebuf)
- void [PrintSubtermList](#) (int from, int to)
- void [PrintExtraSymbol](#) (int num, WORD *terms, int par)
- int [FindSubexpression](#) (WORD *subexpr)
- int [ExtraSymFun](#) (PHEAD WORD *term, WORD level)
- int [PruneExtraSymbols](#) (WORD downto)

4.91.1 Detailed Description

Contains the functions that deal with the rewriting and manipulation of expressions/terms in polynomial representation.

Definition in file [notation.c](#).

4.91.2 Function Documentation

4.91.2.1 NormPolyTerm()

```
int NormPolyTerm (
    PHEAD WORD * term )
```

Definition at line 53 of file [notation.c](#).

4.91.2.2 ConvertToPoly()

```
int ConvertToPoly (
    PHEAD WORD * term,
    WORD * outterm,
    WORD * comlist,
    WORD par )
```

Definition at line 307 of file [notation.c](#).

4.91.2.3 LocalConvertToPoly()

```
int LocalConvertToPoly (
    PHEAD WORD * term,
    WORD * outterm,
    WORD startebuf,
    WORD par )
```

Converts a generic term to polynomial notation in which there are only symbols and brackets. During conversion there will be only symbols. Brackets are stripped. Objects that need 'translation' are put inside a special compiler buffer and represented by a symbol. The numbering of the extra symbols is down from the maximum. In principle there can be a problem when running into the already assigned ones. This uses the FindTree for searching in the global tree and then looks further in the AT.ebufnum. This allows fully parallel processing. Hence we need no locks. Cannot be used in the same module as ConvertToPoly.

Definition at line 510 of file [notation.c](#).

Referenced by [poly_factorize_expression\(\)](#).

4.91.2.4 ConvertFromPoly()

```
int ConvertFromPoly (
    PHEAD WORD * term,
    WORD * outterm,
    WORD from,
    WORD to,
    WORD offset,
    WORD par )
```

Definition at line 660 of file [notation.c](#).

4.91.2.5 FindSubterm()

```
int FindSubterm (
    WORD * subterm )
```

Definition at line 773 of file [notation.c](#).

4.91.2.6 FindLocalSubterm()

```
int FindLocalSubterm (
    PHEAD WORD * subterm,
    WORD startebuf )
```

Definition at line 843 of file [notation.c](#).

4.91.2.7 PrintSubtermList()

```
void PrintSubtermList (
    int from,
    int to )
```

Definition at line 897 of file [notation.c](#).

4.91.2.8 PrintExtraSymbol()

```
void PrintExtraSymbol (
    int num,
    WORD * terms,
    int par )
```

Definition at line 1009 of file [notation.c](#).

4.91.2.9 FindSubexpression()

```
int FindSubexpression (
    WORD * subexpr )
```

Definition at line 1096 of file [notation.c](#).

4.91.2.10 ExtraSymFun()

```
int ExtraSymFun (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1149 of file [notation.c](#).

4.91.2.11 PruneExtraSymbols()

```
int PruneExtraSymbols (
    WORD downto )
```

Definition at line 1217 of file [notation.c](#).

4.92 notation.c

[Go to the documentation of this file.](#)

```
00001
00006 /* #[] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032 /*
00033 * #[] Includes :
00034 */
00035
00036 #include "form3.h"
00037
00038 /*
00039 * #[] Includes :
00040 * #[] NormPolyTerm :
00041
00042 * Brings a term to normal form.
00043
00044 * This routine knows objects of the following types:
00045 * SYMBOL
00046 * HAAKJE
00047 * SNUMBER
00048 * LNUMBER
00049 * The SNUMBER and LNUMBER are worked into the coefficient.
00050 * One of the essences here is that everything can be done in place.
00051 */
00052
00053 int NormPolyTerm(PHEAD WORD *term)
00054 {
00055     WORD *tcoef, ncoef, *tstop, *tfill, *t, *tt;
00056     int equal, i;
00057     WORD *r1, *r2, *r3, *r4, *r5, *rfirst, rv;
```

```

00058      WORD *lnum, nnum;          /* Scratch, originally for factorials */
00059  /*
00060      One: find the coefficient
00061  */
00062      tcoef = term+*term;
00063      ncoef = tcoef[-1];
00064      tstop = tcoef - ABS(tcoef[-1]);
00065      tfill = t = term + 1;
00066      rfirst = 0;
00067      if ( t >= tstop ) { return(*term); }
00068      while ( t < tstop ) {
00069          switch ( *t ) {
00070              case SYMBOL:
00071                  if ( rfirst == 0 ) {
00072  /*
00073                      Here we only need to sort
00074                      1: assume no equals. Bubble.
00075  */
00076                      rfirst = t;
00077                      r2 = rfirst+4; tt = r3 = t + t[1]; equal = 0;
00078                      while ( r2 < r3 ) {
00079                          r1 = r2 - 2;
00080                          if ( *r2 > *r1 ) { r2 += 2; continue; }
00081                          if ( *r2 == *r1 ) { r2 += 2; equal = 1; continue; }
00082                          rv = *r1; *r1 = *r2; *r2 = rv;
00083                          r1 -= 2; r2 -= 2; r4 = r2 + 2;
00084                          while ( r1 > t ) {
00085                              if ( *r2 >= *r1 ) { r2 = r4; break; }
00086                              rv = *r1; *r1 = *r2; *r2 = rv;
00087                              r1 -= 2; r2 -= 2;
00088                          }
00089                      }
00090  /*
00091                      2: hunt down the equal objects
00092                      postpone eliminating zero powers.
00093  */
00094                      if ( equal ) {
00095                          r1 = t+2; r2 = r1+2;
00096                          while ( r2 < r3 ) {
00097                              if ( *r1 == *r2 ) {
00098                                  r1[1] += r2[1];
00099                                  r4 = r2+2;
00100                                  while ( r4 < r3 ) *r2++ = *r4++;
00101                                  t[1] -= 2;
00102                                  r2 = r1 + 2; r3 -= 2;
00103                              }
00104                          }
00105                      }
00106                  }
00107                  else {
00108  /*
00109                      Here we only need to insert
00110  */
00111                      r1 = t + 2; tt = r3 = t + t[1];
00112                      while ( r1 < r3 ) {
00113                          r2 = rfirst+2; r4 = rfirst + rfirst[1];
00114                          while ( r2 < r4 ) {
00115                              if ( *r1 == *r2 ) {
00116                                  r2[1] += r1[1];
00117                                  break;
00118                              }
00119                              else if ( *r2 > *r1 ) {
00120                                  r5 = r4;
00121                                  while ( r5 > r2 ) { r5[1] = r5[-1]; r5[0] = r5[-2]; r5 -= 2; }
00122                                  rfirst[1] += 2;
00123                                  *r2 = *r1; r2[1] = r1[1];
00124                                  break;
00125                              }
00126                              r2 += 2;
00127                          }
00128                          if ( r2 == r4 ) {
00129                              rfirst[1] += 2;
00130                              *r2++ = *r1++; *r2++ = *r1++;
00131                          }
00132                          else r1 += 2;
00133                      }
00134                  }
00135                  t = tt;
00136                  break;
00137              case HAAKJE:      /* Here we skip brackets */
00138                  t += t[1];
00139                  break;
00140              case SNUMBER:
00141                  if ( t[2] < 0 ) {
00142                      t[2] = -t[2];
00143                      if ( t[3] & 1 ) ncoef = -ncoef;
00144                  }

```

```

00145         else if ( t[2] == 0 ) {
00146             if ( t[3] < 0 ) goto NormInf;
00147             goto NormZero;
00148         }
00149         lnum = TermMalloc("lnum");
00150         lnum[0] = t[2];
00151         nnum = 1;
00152         if ( t[3] && RaisPow(BHEAD (UWORD *)lnum,&nnum, (UWORD) (ABS(t[3]))) ) goto FromNorm;
00153         ncoef = REDLENG(ncoef);
00154         if ( t[3] < 0 ) {
00155             if ( Divvy(BHEAD (UWORD *)tstop,&ncoef, (UWORD *)lnum,nnum) )
00156                 goto FromNorm;
00157         }
00158         else if ( t[3] > 0 ) {
00159             if ( Mully(BHEAD (UWORD *)tstop,&ncoef, (UWORD *)lnum,nnum) )
00160                 goto FromNorm;
00161         }
00162         ncoef = INCLENG(ncoef);
00163         t += t[1];
00164         TermFree(lnum,"lnum");
00165         break;
00166     case LNUMBER:
00167         ncoef = REDLENG(ncoef);
00168         if ( Mully(BHEAD (UWORD *)tstop,&ncoef, (UWORD *) (t+3),t[2]) ) goto FromNorm;
00169         ncoef = INCLENG(ncoef);
00170         t += t[1];
00171         break;
00172     default:
00173         MLOCK(ErrorMessageLock);
00174         MesPrint("Illegal code in NormPolyTerm");
00175         MUNLOCK(ErrorMessageLock);
00176         Terminate(-1);
00177         break;
00178     }
00179 }
00180 /*
00181  Now we try to eliminate objects to the power zero.
00182 */
00183 if ( rfirst ) {
00184     r2 = rfirst+2;
00185     r3 = rfirst + rfirst[1];
00186     while ( r2 < r3 ) {
00187         if ( r2[1] == 0 ) {
00188             r1 = r2 + 2;
00189             while ( r1 < r3 ) { r1[-2] = r1[0]; r1[-1] = r1[1]; r1 += 2; }
00190             r3 -= 2;
00191             rfirst[1] -= 2;
00192         }
00193         else { r2 += 2; }
00194     }
00195     if ( rfirst[1] < 4 ) rfirst = 0;
00196 }
00197 /*
00198  Finally we put the term together
00199 */
00200 if ( rfirst ) {
00201     i = rfirst[1];
00202     NCOPY(tfill,rfirst,i)
00203 }
00204 i = ABS(ncoef)-1;
00205 NCOPY(tfill,tstop,i)
00206 *tfill++ = ncoef;
00207 *term = tfill - term;
00208 return(*term);
00209 NormZero:
00210 *term = 0;
00211 return(0);
00212 NormInf:
00213 MLOCK(ErrorMessageLock);
00214 MesPrint("0^0 in NormPolyTerm");
00215 MUNLOCK(ErrorMessageLock);
00216 Terminate(-1);
00217 return(-1);
00218 FromNorm:
00219 MLOCK(ErrorMessageLock);
00220 MesCall("NormPolyTerm");
00221 MUNLOCK(ErrorMessageLock);
00222 Terminate(-1);
00223 return(-1);
00224 }
00225
00226 /*
00227     #] NormPolyTerm :
00228     #[ ComparePoly :
00229 */
00251 #ifdef WITHCOMPAREPOLY
00252

```

```

00253 WORD ComparePoly(WORD *term1, WORD *term2, WORD level)
00254 {
00255     WORD *t1, *t2, *t3, *t4, *tstop1, *tstop2;
00256     tstop1 = term1 + *term1;
00257     tstop1 -= ABS(tstop1[-1]);
00258     tstop2 = term2 + *term2;
00259     tstop2 -= ABS(tstop2[-1]);
00260     t1 = term1+1;
00261     t2 = term2+1;
00262     while ( t1 < tstop1 && t2 < tstop2 ) {
00263         if ( *t1 == *t2 ) {
00264             if ( *t1 == HAAKJE ) {
00265                 if ( t1[2] != t2[2] ) return(t2[2]-t1[2]);
00266                 t1 += t1[1]; t2 += t2[1];
00267             }
00268             else { /* must be type SYMBOL */
00269                 t3 = t1 + t1[1]; t4 = t2 + t2[1];
00270                 t1 += 2; t2 += 2;
00271                 while ( t1 < t3 && t2 < t4 ) {
00272                     if ( *t1 != *t2 ) return(*t2-*t1);
00273                     if ( t1[1] != t2[1] ) return(t2[1]-t1[1]);
00274                     t1 += 2; t2 += 2;
00275                 }
00276                 if ( t1 < t3 ) return(-1);
00277                 if ( t2 < t4 ) return(1);
00278             }
00279         }
00280         else return(*t2-*t1);
00281     }
00282     if ( t1 < tstop1 ) return(-1);
00283     if ( t2 < tstop2 ) return(1);
00284     return(0);
00285 }
00286
00287 #endif
00288
00289 /*
00290     #] ComparePoly :
00291     #[ ConvertToPoly :
00292 */
00305 static int FirstWarnConvertToPoly = 1;
00306
00307 int ConvertToPoly(PHEAD WORD *term, WORD *outterm, WORD *comlist, WORD par)
00308 {
00309     WORD *tout, *tstop, ncoef, *t, *r, *tt, *ttwo = 0;
00310     int i, action = 0;
00311     tt = term + *term;
00312     ncoef = ABS(tt[-1]);
00313     tstop = tt - ncoef;
00314     tout = outterm+1;
00315     t = term + 1;
00316     if ( comlist[2] == DOALL ) {
00317         while ( t < tstop ) {
00318             if ( *t == SYMBOL ) {
00319                 r = t+2;
00320                 t += t[1];
00321                 while ( r < t ) {
00322                     if ( r[1] > 0 ) {
00323                         *tout++ = SYMBOL;
00324                         *tout++ = 4;
00325                         *tout++ = r[0];
00326                         *tout++ = r[1];
00327                     }
00328                     else {
00329                         tout[1] = SYMBOL;
00330                         tout[2] = 4;
00331                         tout[3] = r[0];
00332                         tout[4] = -1;
00333                         i = FindSubterm(tout+1);
00334                         *tout++ = SYMBOL;
00335                         *tout++ = 4;
00336                         *tout++ = MAXVARIABLES-i;
00337                         *tout++ = -r[1];
00338                         action = 1;
00339                     }
00340                     r += 2;
00341                 }
00342             }
00343             else if ( *t == DOTPRODUCT ) {
00344                 r = t + 2;
00345                 t += t[1];
00346                 while ( r < t ) {
00347                     tout[1] = DOTPRODUCT;
00348                     tout[2] = 5;
00349                     tout[3] = r[0];
00350                     tout[4] = r[1];
00351                     if ( r[2] < 0 ) {

```

```

00352         tout[5] = -1;
00353     }
00354     else {
00355         tout[5] = 1;
00356     }
00357     i = FindSubterm(tout+1);
00358     *tout++ = SYMBOL;
00359     *tout++ = 4;
00360     *tout++ = MAXVARIABLES-i;
00361     *tout++ = ABS(r[2]);
00362     r += 3;
00363     action = 1;
00364 }
00365 }
00366 else if ( *t == VECTOR ) {
00367     r = t + 2;
00368     t += t[1];
00369     while ( r < t ) {
00370         tout[1] = VECTOR;
00371         tout[2] = 4;
00372         tout[3] = r[0];
00373         tout[4] = r[1];
00374         i = FindSubterm(tout+1);
00375         *tout++ = SYMBOL;
00376         *tout++ = 4;
00377         *tout++ = MAXVARIABLES-i;
00378         *tout++ = 1;
00379         r += 2;
00380         action = 1;
00381     }
00382 }
00383 else if ( *t == INDEX ) {
00384     r = t + 2;
00385     t += t[1];
00386     while ( r < t ) {
00387         tout[1] = INDEX;
00388         tout[2] = 3;
00389         tout[3] = r[0];
00390         i = FindSubterm(tout+1);
00391         *tout++ = SYMBOL;
00392         *tout++ = 4;
00393         *tout++ = MAXVARIABLES-i;
00394         *tout++ = 1;
00395         r++;
00396         action = 1;
00397     }
00398 }
00399 else if ( *t == HAAKJE ) {
00400     if ( par ) {
00401         tout[0] = 1; tout[1] = 1; tout[2] = 3;
00402         *outterm = (tout+3)-outterm;
00403         if ( NormPolyTerm(BHEAD outterm) < 0 ) return(-1);
00404         tout = outterm + *outterm;
00405         tout -= 3;
00406         i = t[1]; NCOPY(tout,t,i);
00407         ttwo = tout-1;
00408     }
00409     else { t += t[1]; }
00410 }
00411 else if ( *t >= FUNCTION ) {
00412     i = FindSubterm(t);
00413     t += t[1];
00414     *tout++ = SYMBOL;
00415     *tout++ = 4;
00416     *tout++ = MAXVARIABLES-i;
00417     *tout++ = 1;
00418     action = 1;
00419 }
00420 else {
00421     if ( FirstWarnConvertToPoly ) {
00422         MLOCK(ErrorMessageLock);
00423         MesPrint("Illegal object in conversion to polynomial notation");
00424         MUNLOCK(ErrorMessageLock);
00425         FirstWarnConvertToPoly = 0;
00426     }
00427     return(-1);
00428 }
00429 }
00430 NCOPY(tout,tstop,nccoef)
00431 if ( ttwo ) {
00432     WORD hh = *ttwo;
00433     *ttwo = tout-ttwo;
00434     if ( ( i = NormPolyTerm(BHEAD ttwo) ) >= 0 ) i = action;
00435     tout = ttwo + *ttwo;
00436     *ttwo = hh;
00437     *outterm = tout - outterm;
00438 }

```

```

00439     else {
00440         *outterm = tout-outterm;
00441         if ( ( i = NormPolyTerm(BHEAD outterm) ) >= 0 ) i = action;
00442     }
00443 }
00444 else if ( comlist[2] == ONLYFUNCTIONS ) {
00445     while ( t < tstop ) {
00446         if ( *t >= FUNCTION ) {
00447             if ( comlist[1] == 3 ) {
00448                 i = FindSubterm(t);
00449                 t += t[1];
00450                 *tout++ = SYMBOL;
00451                 *tout++ = 4;
00452                 *tout++ = MAXVARIABLES-i;
00453                 *tout++ = 1;
00454                 action = 1;
00455             }
00456             else {
00457                 for ( i = 3; i < comlist[1]; i++ ) {
00458                     if ( *t == comlist[i] ) break;
00459                 }
00460                 if ( i < comlist[1] ) {
00461                     i = FindSubterm(t);
00462                     t += t[1];
00463                     *tout++ = SYMBOL;
00464                     *tout++ = 4;
00465                     *tout++ = MAXVARIABLES-i;
00466                     *tout++ = 1;
00467                     action = 1;
00468                 }
00469                 else {
00470                     i = t[1]; NCOPY(tout,t,i);
00471                 }
00472             }
00473         }
00474         else {
00475             i = t[1]; NCOPY(tout,t,i);
00476         }
00477     }
00478     NCOPY(tout,tstop,ncoef)
00479     *outterm = tout-outterm;
00480     Normalize(BHEAD outterm);
00481     i = action;
00482 }
00483 else {
00484     MLOCK(ErrorMessageLock);
00485     MesPrint("Illegal internal code in conversion to polynomial notation");
00486     MUNLOCK(ErrorMessageLock);
00487     i = -1;
00488 }
00489 return(i);
00490 }
00491
00492 /*
00493     #] ConvertToPoly :
00494     #[ LocalConvertToPoly :
00495 */
00510 int LocalConvertToPoly(PHEAD WORD *term, WORD *outterm, WORD startebuf, WORD par)
00511 {
00512     WORD *tout, *tstop, ncoef, *t, *r, *tt, *ttwo = 0;
00513     int i, action = 0;
00514     tt = term + *term;
00515     ncoef = ABS(tt[-1]);
00516     tstop = tt - ncoef;
00517     tout = outterm+1;
00518     t = term + 1;
00519     while ( t < tstop ) {
00520         if ( *t == SYMBOL ) {
00521             r = t+2;
00522             t += t[1];
00523             while ( r < t ) {
00524                 if ( r[1] > 0 ) {
00525                     *tout++ = SYMBOL;
00526                     *tout++ = 4;
00527                     *tout++ = r[0];
00528                     *tout++ = r[1];
00529                 }
00530                 else {
00531                     tout[1] = SYMBOL;
00532                     tout[2] = 4;
00533                     tout[3] = r[0];
00534                     tout[4] = -1;
00535                     i = FindLocalSubterm(BHEAD tout+1,startebuf);
00536                     *tout++ = SYMBOL;
00537                     *tout++ = 4;
00538                     *tout++ = MAXVARIABLES-i;
00539                     *tout++ = -r[1];

```

```

00540         action = 1;
00541     }
00542     r += 2;
00543 }
00544 }
00545 else if ( *t == DOTPRODUCT ) {
00546     r = t + 2;
00547     t += t[1];
00548     while ( r < t ) {
00549         tout[1] = DOTPRODUCT;
00550         tout[2] = 5;
00551         tout[3] = r[0];
00552         tout[4] = r[1];
00553         if ( r[2] < 0 ) {
00554             tout[5] = -1;
00555         }
00556         else {
00557             tout[5] = 1;
00558         }
00559         i = FindLocalSubterm(BHEAD tout+1,startebuf);
00560         *tout++ = SYMBOL;
00561         *tout++ = 4;
00562         *tout++ = MAXVARIABLES-i;
00563         *tout++ = ABS(r[2]);
00564         r += 3;
00565         action = 1;
00566     }
00567 }
00568 else if ( *t == VECTOR ) {
00569     r = t + 2;
00570     t += t[1];
00571     while ( r < t ) {
00572         tout[1] = VECTOR;
00573         tout[2] = 4;
00574         tout[3] = r[0];
00575         tout[4] = r[1];
00576         i = FindLocalSubterm(BHEAD tout+1,startebuf);
00577         *tout++ = SYMBOL;
00578         *tout++ = 4;
00579         *tout++ = MAXVARIABLES-i;
00580         *tout++ = 1;
00581         r += 2;
00582         action = 1;
00583     }
00584 }
00585 else if ( *t == INDEX ) {
00586     r = t + 2;
00587     t += t[1];
00588     while ( r < t ) {
00589         tout[1] = INDEX;
00590         tout[2] = 3;
00591         tout[3] = r[0];
00592         i = FindLocalSubterm(BHEAD tout+1,startebuf);
00593         *tout++ = SYMBOL;
00594         *tout++ = 4;
00595         *tout++ = MAXVARIABLES-i;
00596         *tout++ = 1;
00597         r++;
00598         action = 1;
00599     }
00600 }
00601 else if ( *t == HAAKJE ) {
00602     if ( par ) {
00603         tout[0] = 1; tout[1] = 1; tout[2] = 3;
00604         outterm = (tout+3)-outterm;
00605         if ( NormPolyTerm(BHEAD outterm) < 0 ) return(-1);
00606         tout = outterm + *outterm;
00607         tout -= 3;
00608         i = t[1]; NCOPY(tout,t,i);
00609         ttwo = tout-1;
00610     }
00611     else { t += t[1]; }
00612 }
00613 else if ( *t >= FUNCTION ) {
00614     i = FindLocalSubterm(BHEAD t,startebuf);
00615     t += t[1];
00616     *tout++ = SYMBOL;
00617     *tout++ = 4;
00618     *tout++ = MAXVARIABLES-i;
00619     *tout++ = 1;
00620     action = 1;
00621 }
00622 else {
00623     if ( FirstWarnConvertToPoly ) {
00624         MLOCK(ErrorMessageLock);
00625         MesPrint("Illegal object in conversion to polynomial notation");
00626         MUNLOCK(ErrorMessageLock);

```

```

00627         FirstWarnConvertToPoly = 0;
00628     }
00629     return(-1);
00630 }
00631 }
00632 NCOPY(tout,tstop,ncoef)
00633 if ( ttwo ) {
00634     WORD hh = *ttwo;
00635     *ttwo = tout-ttwo;
00636     if ( ( i = NormPolyTerm(BHEAD ttwo) ) >= 0 ) i = action;
00637     tout = ttwo + *ttwo;
00638     *ttwo = hh;
00639     *outterm = tout - outterm;
00640 }
00641 else {
00642     *outterm = tout-outterm;
00643     if ( ( i = NormPolyTerm(BHEAD outterm) ) >= 0 ) i = action;
00644 }
00645 return(i);
00646 }
00647
00648 /*
00649     #] LocalConvertToPoly :
00650     #[ ConvertFromPoly :
00651
00652     Converts a generic term from polynomial notation to the original
00653     in which the extra symbols have been replaced by their values.
00654     The output is in outterm.
00655     We only deal with the extra symbols in the range from < i <= to
00656     The output has to be sent to TestSub because it may contain
00657     subexpressions when extra symbols have been replaced.
00658 */
00659
00660 int ConvertFromPoly(PHEAD WORD *term, WORD *outterm, WORD from, WORD to, WORD offset, WORD par)
00661 {
00662     WORD *tout, *tstop, *tstop1, ncoef, *t, *r, *tt;
00663     int i;
00664     /* first = 1; */
00665     tt = term + *term;
00666     tout = outterm+1;
00667     ncoef = ABS(tt[-1]);
00668     tstop = tt - ncoef;
00669     /*
00670     r = t = term + 1;
00671     while ( t < tstop ) {
00672         if ( *t == SYMBOL ) {
00673             tstop1 = t + t[1];
00674             tt = t + 2;
00675             while ( tt < tstop1 ) {
00676                 if ( ( *tt < MAXVARIABLES - to )
00677                     || ( *tt >= MAXVARIABLES - from ) ) {
00678                     tt += 2;
00679                 }
00680                 else break;
00681             }
00682             if ( tt >= tstop1 ) { t = tstop1; continue; }
00683             while ( r < t ) *tout++ = *r++;
00684             t += 2;
00685             first = 0;
00686             while ( t < tstop1 ) {
00687                 if ( ( *t < MAXVARIABLES - to )
00688                     || ( *t >= MAXVARIABLES - from ) ) {
00689                     *tout++ = SYMBOL;
00690                     *tout++ = 4;
00691                     *tout++ = *t++;
00692                     *tout++ = *t++;
00693                 }
00694                 else {
00695                     *tout++ = SUBEXPRESSION;
00696                     *tout++ = SUBEXPSIZE;
00697                     *tout++ = MAXVARIABLES - *t++ + offset;
00698                     *tout++ = *t++;
00699                     if ( par ) *tout++ = AT.ebufnum;
00700                     else *tout++ = AM.sbufnum;
00701                     FILLSUB(tout)
00702                 }
00703             }
00704             r = t;
00705         }
00706         else {
00707             t += t[1];
00708         }
00709     }
00710     if ( first ) {
00711         i = *term; t = term;
00712         NCOPY(outterm,t,i);
00713         return(*term);

```



```

00714     }
00715     while ( r < t ) *tout++ = *r++;
00716     NCOPY(tout,tstop,ncoef)
00717     *outterm = tout-outterm;
00718 /*
00719     t = term + 1;
00720     while ( t < tstop ) {
00721         if ( *t == SYMBOL ) {
00722             tstop1 = t + t[1];
00723             tt = t + 2;
00724             while ( tt < tstop1 ) {
00725                 if ( ( *tt < MAXVARIABLES - to )
00726                     || ( *tt >= MAXVARIABLES - from ) ) {
00727                     tt += 2;
00728                 }
00729                 else {
00730                     *tout++ = SUBEXPRESSION;
00731                     *tout++ = SUBEXPSIZE;
00732                     *tout++ = MAXVARIABLES - *tt++ + offset;
00733                     *tout++ = *tt++;
00734                     if ( par ) *tout++ = AT.ebufnum;
00735                     else      *tout++ = AM.sbufnum;
00736                     FILLSUB(tout)
00737                 }
00738             }
00739             r = tout; t += 2;
00740             *tout++ = SYMBOL; *tout++ = 0;
00741             while ( t < tstop1 ) {
00742                 if ( ( *t < MAXVARIABLES - to )
00743                     || ( *t >= MAXVARIABLES - from ) ) {
00744                     *tout++ = *t++;
00745                     *tout++ = *t++;
00746                 }
00747                 else { t += 2; }
00748             }
00749             r[1] = tout - r;
00750             if ( r[1] <= 2 ) tout = r;
00751         }
00752         else {
00753             i = t[1]; NCOPY(tout,t,i)
00754         }
00755     }
00756     NCOPY(tout,tstop,ncoef)
00757     *outterm = tout-outterm;
00758     return(*outterm);
00759 }
00760
00761 /*
00762     #] ConvertFromPoly :
00763     #[ FindSubterm :
00764
00765     In this routine we look up a variable.
00766     If we don't find it we will enter it in the subterm compiler buffer
00767     Searching is by tree structure.
00768     Adding changes the tree.
00769
00770     Notice that in TFORM we should be in sequential mode.
00771 */
00772
00773 int FindSubterm(WORD *subterm)
00774 {
00775     WORD old[5], *ss, *term;
00776     int number;
00777     CBUF *C = cbuf + AM.sbufnum;
00778     LONG oldCpointer;
00779     term = subterm-1;
00780     ss = subterm+subterm[1];
00781 /*
00782     Convert to proper term
00783 */
00784     old[0] = *term; old[1] = ss[0]; old[2] = ss[1]; old[3] = ss[2]; old[4] = ss[3];
00785     ss[0] = 1; ss[1] = 1; ss[2] = 3; ss[3] = 0; *term = subterm[1]+4;
00786 /*
00787     We may have to add the term to the compiler
00788     buffer and then to the tree. This cannot be done in parallel and
00789     hence we have to set a lock.
00790 */
00791     LOCK(AM.sbuflock);
00792
00793     oldCpointer = C->Pointer-C->Buffer; /* Offset of course !!!!!*/
00794     AddRHS(AM.sbufnum,1);
00795     AddNtoC(AM.sbufnum,*term,term,8);
00796     AddToCB(C,0)
00797 /*
00798     See whether we have this one already. If not, insert it in the tree.
00799 */
00800     number = InsTree(AM.sbufnum,C->numrhs);

```

```

00801 /*
00802     Restore old values and return what is needed.
00803 */
00804 if ( number < (C->numrhs) ) { /* It existed already */
00805     C->Pointer = oldCpointer + C->Buffer;
00806     C->numrhs--;
00807 }
00808 else {
00809     GETIDENTITY
00810     WORD dim = DimensionSubterm(subterm);
00811
00812     if ( dim == -MAXPOSITIVE ) { /* Give error message but continue */
00813         WORD *old = AN.currentTerm;
00814         AN.currentTerm = term;
00815         MLOCK(ErrorMessageLock);
00816         MesPrint("Dimension out of range in %t");
00817         MUNLOCK(ErrorMessageLock);
00818         AN.currentTerm = old;
00819     }
00820 /*
00821     Store the dimension
00822 */
00823     C->dimension[number] = dim;
00824 }
00825 UNLOCK(AM.sbuflock);
00826
00827 *term = old[0]; ss[0] = old[1]; ss[1] = old[2]; ss[2] = old[3]; ss[3] = old[4];
00828 return(number);
00829 }
00830
00831 /*
00832     #] FindSubterm :
00833     #[ FindLocalSubterm :
00834
00835     In this routine we look up a variable.
00836     If we don't find it we will enter it in the subterm compiler buffer
00837     Searching is by tree structure.
00838     Adding changes the tree.
00839
00840     Notice that in TFORM we should be in sequential mode.
00841 */
00842
00843 int FindLocalSubterm(PHEAD WORD *subterm, WORD startebuf)
00844 {
00845     WORD old[5], *ss, *term, i, j, *t1, *t2;
00846     int number;
00847     CBUF *C = cbuf + AT.ebufnum;
00848     term = subterm-1;
00849     ss = subterm+subterm[1];
00850 /*
00851     Convert to proper term
00852 */
00853     old[0] = *term; old[1] = ss[0]; old[2] = ss[1]; old[3] = ss[2]; old[4] = ss[3];
00854     ss[0] = 1; ss[1] = 1; ss[2] = 3; ss[3] = 0; *term = subterm[1]+4;
00855 /*
00856     First see whether we have this one already in the global buffer.
00857 */
00858     number = FindTree(AM.sbufnum,term);
00859     if ( number > 0 ) goto wearehappy;
00860 /*
00861     Now look whether it is in the ebufnum between startebuf and numrhs
00862     Note however that we need an offset of (numxsymbol-startebuf)
00863 */
00864     for ( i = startebuf+1; i <= C->numrhs; i++ ) {
00865         t1 = C->rhs[i]; t2 = term;
00866         if ( *t1 == *t2 ) {
00867             j = *t1;
00868             while ( *t1 == *t2 && j > 0 ) { t1++; t2++; j--; }
00869             if ( j <= 0 ) {
00870                 number = i-startebuf+numxsymbol;
00871                 goto wearehappy;
00872             }
00873         }
00874     }
00875 /*
00876     Now we have to add it to cbuf[AT.ebufnum]
00877 */
00878     AddRHS(AT.ebufnum,1);
00879     AddNtoC(AT.ebufnum,*term,term,9);
00880     AddToCB(C,0)
00881     number = C->numrhs-startebuf+numxsymbol;
00882 wearehappy:
00883     *term = old[0]; ss[0] = old[1]; ss[1] = old[2]; ss[2] = old[3]; ss[3] = old[4];
00884     return(number);
00885 }
00886
00887 /*

```

```

00888      #] FindLocalSubterm :
00889      #[ PrintSubtermList :
00890
00891      Prints all the expressions in the subterm compiler buffer.
00892      The format is such that they give definitions of the temporary
00893      variables of which the contents are stored in this buffer.
00894      These variables have the names Z_123 etc.
00895  */
00896
00897 void PrintSubtermList(int from,int to)
00898 {
00899     UBYTE buffer[80], *out, outbuffer[300];
00900     int first, i, ii, inc = 1;
00901     WORD *term;
00902     CBUF *C = cbuf + AM.sbufnum;
00903  /*
00904     if ( to < from ) inc = -1;
00905     if ( to == from ) inc = 0;
00906  */
00907     if ( from <= to ) {
00908         inc = 1; to += inc;
00909     }
00910     else {
00911         inc = -1; to += inc;
00912     }
00913     AO.OutFill = AO.OutputLine = outbuffer;
00914     AO.OutStop = AO.OutputLine+AC.LineLength;
00915     AO.IsBracket = 0;
00916     AO.OutSkip = 3;
00917
00918     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {
00919         TokenToLine((UBYTE *) "      ");
00920         AO.OutSkip = 7;
00921     }
00922     else if ( ( AO.Optimize.debugflags & 1 ) == 1 ) {}
00923     else if ( AO.OutSkip > 0 ) {
00924         for ( i = 0; i < AO.OutSkip; i++ ) TokenToLine((UBYTE *) " ");
00925     }
00926     i = from;
00927     do {
00928         if ( ( AO.Optimize.debugflags & 1 ) == 1 ) {
00929             TokenToLine((UBYTE *) "id ");
00930             for ( ii = 3; ii < AO.OutSkip; ii++ ) TokenToLine((UBYTE *) " ");
00931         }
00932  /*
00933         if ( AC.OutputMode == NORMALFORMAT ) {
00934             TokenToLine((UBYTE *) "id ");
00935         }
00936  */
00937         else if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {}
00938         else { TokenToLine((UBYTE *) " "); }
00939
00940         out = StrCopy((UBYTE *) AC.extrasym,buffer);
00941         if ( AC.extrasymbols == 0 ) {
00942             out = NumCopy(i,out);
00943             out = StrCopy((UBYTE *) "_",out);
00944         }
00945         else if ( AC.extrasymbols == 1 ) {
00946             out = AddArrayIndex(i,out);
00947         }
00948         out = StrCopy((UBYTE *) "=",out);
00949         TokenToLine(buffer);
00950         term = C->rhs[i];
00951         first = 1;
00952         if ( *term == 0 ) {
00953             out = StrCopy((UBYTE *) "0",buffer);
00954             if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE ) {
00955                 out = StrCopy((UBYTE *) ";",out);
00956             }
00957             TokenToLine(buffer);
00958         }
00959         else {
00960             while ( *term ) {
00961                 if ( WriteInnerTerm(term,first) ) Terminate(-1);
00962                 term += *term;
00963                 first = 0;
00964             }
00965             if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE ) {
00966                 out = StrCopy((UBYTE *) ";",buffer);
00967                 TokenToLine(buffer);
00968             }
00969         }
00970  /*
00971         There is a problem with FiniLine because it prepares for a
00972         continuation line in fortran mode.
00973         But the next statement should start on a blank line.
00974  */

```

```

00975 /*
00976     FiniLine();
00977     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {
00978         AO.OutFill = AO.OutputLine;
00979         TokenToLine((UBYTE *) "      ");
00980         AO.OutSkip = 7;
00981     }
00982 */
00983     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {
00984         AO.OutSkip = 6;
00985         FiniLine();
00986         AO.OutSkip = 7;
00987     }
00988     else {
00989         FiniLine();
00990     }
00991     i += inc;
00992 } while ( i != to );
00993 }
00994
00995 /*
00996     #] PrintSubtermList :
00997     #[ PrintExtraSymbol :
00998
00999     Prints the definition of extra symbol num as the contents
01000     of the expression in terms.
01001     The parameter par has three options:
01002         EXTRASYMBOL      num is interpreted as the number of an extra symbol
01003         REGULARSYMBOL    num is interpreted as the number of a symbol.
01004                         It could still be an extra symbol.
01005         EXPRESSIONNUMBER num is the number of an expression.
01006     terms contains the rhs expression.
01007 */
01008
01009 void PrintExtraSymbol(int num, WORD *terms,int par)
01010 {
01011     UBYTE buffer[80], *out, outbuffer[300];
01012     int first, i;
01013     WORD *term;
01014
01015     AO.OutFill = AO.OutputLine = outbuffer;
01016     AO.OutStop = AO.OutputLine+AC.LineLength;
01017     AO.IsBracket = 0;
01018
01019     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {
01020         TokenToLine((UBYTE *) "      ");
01021         AO.OutSkip = 7;
01022     }
01023     else if ( ( AO.Optimize.debugflags & 1 ) == 1 ) {
01024         TokenToLine((UBYTE *) "id ");
01025         for ( i = 3; i < AO.OutSkip; i++ ) TokenToLine((UBYTE *) " ");
01026     }
01027     else if ( AO.OutSkip > 0 ) {
01028         for ( i = 0; i < AO.OutSkip; i++ ) TokenToLine((UBYTE *) " ");
01029     }
01030     out = buffer;
01031     switch ( par ) {
01032     case REGULARSYMBOL:
01033         if ( num >= MAXVARIABLES-cbuf[AM.sbufnum].numrhs ) {
01034             num = MAXVARIABLES-num;
01035         }
01036         else {
01037             out = StrCopy(FindSymbol(num),out);
01038             /* out = StrCopy(VARNAME(symbols,num),out); */
01039             break;
01040         }
01041         /* fall through */
01042     case EXTRASYMBOL:
01043         out = StrCopy(FindExtraSymbol(num),out);
01044         /*
01045         out = StrCopy((UBYTE *)AC.extrasym,out);
01046         if ( AC.extrasymbols == 0 ) {
01047             out = NumCopy(num,out);
01048             out = StrCopy((UBYTE *) "_",out);
01049         }
01050         else if ( AC.extrasymbols == 1 ) {
01051             out = AddArrayIndex(num,out);
01052         }
01053         */
01054         break;
01055     case EXPRESSIONNUMBER:
01056         out = StrCopy(EXPRNAME(num),out);
01057         break;
01058     default:
01059         MesPrint("Illegal option in PrintExtraSymbol");
01060         Terminate(-1);
01061     }
}

```

```

01062     out = StrCopy((UBYTE *) "=", out);
01063     TokenToLine(buffer);
01064     term = terms;
01065     first = 1;
01066     if ( *term == 0 ) {
01067         out = StrCopy((UBYTE *) "0", buffer);
01068         TokenToLine(buffer);
01069     }
01070     else {
01071         while ( *term ) {
01072             if ( WriteInnerTerm(term, first) ) Terminate(-1);
01073             term += *term;
01074             first = 0;
01075         }
01076     }
01077     if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE ) {
01078         out = StrCopy((UBYTE *) ";", buffer);
01079         TokenToLine(buffer);
01080     }
01081     FiniLine();
01082 }
01083
01084 /*
01085     #] PrintExtraSymbol :
01086     #[ FindSubexpression :
01087
01088     In this routine we look up a subexpression.
01089     If we don't find it we will enter it in the subterm compiler buffer
01090     Searching is by tree structure.
01091     Adding changes the tree.
01092
01093     Notice that in TFORM we should be in sequential mode.
01094 */
01095
01096 int FindSubexpression(WORD *subexpr)
01097 {
01098     WORD *term;
01099     int number;
01100     CBUF *C = cbuf + AM.sbufnum;
01101     LONG oldCpointer;
01102
01103     term = subexpr;
01104     while ( *term ) term += *term;
01105     number = term - subexpr;
01106     /*
01107         We may have to add the subexpression to the tree.
01108         This requires a lock.
01109     */
01110     LOCK(AM.sbuflock);
01111
01112     oldCpointer = C->Pointer-C->Buffer; /* Offset of course !!!!!*/
01113     AddRHS(AM.sbufnum, 1);
01114     /*
01115         Add the terms to the compiler buffer. Paste on a zero.
01116     */
01117     AddNtoC(AM.sbufnum, number, subexpr, 10);
01118     AddToCB(C, 0)
01119     /*
01120         See whether we have this one already. If not, insert it in the tree.
01121     */
01122     number = InsTree(AM.sbufnum, C->numrhs);
01123     /*
01124         Restore old values and return what is needed.
01125     */
01126     if ( number < (C->numrhs) ) { /* It existed already */
01127         C->Pointer = oldCpointer + C->Buffer;
01128         C->numrhs--;
01129     }
01130     else {
01131         GETIDENTITY
01132         WORD dim = DimensionExpression(BHEAD subexpr);
01133     /*
01134         Store the dimension
01135     */
01136         C->dimension[number] = dim;
01137     }
01138
01139     UNLOCK(AM.sbuflock);
01140
01141     return(number);
01142 }
01143
01144 /*
01145     #] FindSubexpression :
01146     #[ ExtraSymFun :
01147 */
01148

```

```

01149 int ExtraSymFun(PHEAD WORD *term,WORD level)
01150 {
01151     WORD *oldworkpointer = AT.WorkPointer;
01152     WORD *termout, *t1, *t2, *t3, *tstop, *tend, i;
01153     int retval = 0;
01154     tend = termout = term + *term;
01155     tstop = tend - ABS(tend[-1]);
01156     t3 = t1 = term+1; t2 = termout+1;
01157     /*
01158     First refind the function(s). There is at least one.
01159     */
01160     while ( t1 < tstop ) {
01161         if ( *t1 == EXTRASYMFUN && t1[1] == FUNHEAD+2 ) {
01162             if ( t1[FUNHEAD] == -SNUMBER && t1[FUNHEAD+1] <= numxsymbol
01163                 && t1[FUNHEAD+1] > 0 ) {
01164                 i = t1[FUNHEAD+1];
01165             }
01166             else if ( t1[FUNHEAD] == -SYMBOL && t1[FUNHEAD+1] < MAXVARIABLES
01167                 && t1[FUNHEAD+1] >= MAXVARIABLES-numxsymbol ) {
01168                 i = MAXVARIABLES - t1[FUNHEAD+1];
01169             }
01170             else goto nocase;
01171             while ( t3 < t1 ) *t2++ = *t3++;
01172         /*
01173         Now inset the rhs pointer
01174         */
01175         *t2++ = SUBEXPRESSION;
01176         *t2++ = SUBEXPSIZE;
01177         *t2++ = i;
01178         *t2++ = 1;
01179         *t2++ = AM.sbufnum;
01180         FILLSUB(t2)
01181         t3 = t1 = t1 + t1[1];
01182     }
01183     else if ( *t1 == EXTRASYMFUN && t1[1] == FUNHEAD ) {
01184         while ( t3 < t1 ) *t2++ = *t3++;
01185         t3 = t1 = t1 + t1[1];
01186     }
01187     else {
01188 nocase:;
01189         t1 = t1 + t1[1];
01190     }
01191 }
01192 while ( t3 < tend ) *t2++ = *t3++;
01193 *termout = t2 - termout;
01194 AT.WorkPointer = t2;
01195 if ( AT.WorkPointer >= AT.WorkTop ) {
01196     MLOCK(ErrorMessageLock);
01197     MesWork();
01198     MUNLOCK(ErrorMessageLock);
01199     AT.WorkPointer = oldworkpointer;
01200     return(-1);
01201 }
01202 retval = Generator(BHEAD termout,level);
01203 AT.WorkPointer = oldworkpointer;
01204 if ( retval < 0 ) {
01205     MLOCK(ErrorMessageLock);
01206     MesCall("ExtraSymFun");
01207     MUNLOCK(ErrorMessageLock);
01208 }
01209 return(retval);
01210 }
01211 /*
01212 #] ExtraSymFun :
01213 #[ PruneExtraSymbols :
01214 */
01215 */
01216
01217 int PruneExtraSymbols(WORD downto)
01218 {
01219     CBUF *C = cbuf + AM.sbufnum;
01220     if ( downto < C->numrhs && downto >= 0 ) { /* !!!!! */
01221         ClearTree(AM.sbufnum);
01222         C->numrhs = downto;
01223         if ( downto == 0 ) {
01224             C->Pointer = C->Buffer;
01225         }
01226         else {
01227             WORD *w = C->rhs[downto], i;
01228             while ( *w ) w += *w;
01229             C->Pointer = w+1;
01230             for ( i = 1; i <= downto; i++ ) {
01231                 InsTree(AM.sbufnum,i);
01232             }
01233         }
01234     }
01235     return(0);

```

```


01236 }
01237
01238 /*
01239      #] PruneExtraSymbols :
01240 */

```

4.93 opera.c File Reference

```
#include "form3.h"
```

Include dependency graph for opera.c:

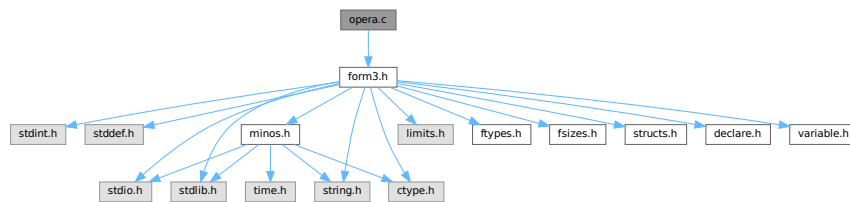

Functions

- int [EpfFind](#) (PHEAD WORD *term, WORD *params)
- int [EpfCon](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)
- WORD [EpfGen](#) (WORD number, WORD *inlist, WORD *kron, WORD *perm, WORD sgn)
- WORD [Trick](#) (WORD *in, [TRACES](#) *t)
- int [Trace4no](#) (WORD number, WORD *kron, [TRACES](#) *t)
- int [Trace4](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)
- int [Trace4Gen](#) (PHEAD [TRACES](#) *t, WORD number)
- WORD [TraceNno](#) (WORD number, WORD *kron, [TRACES](#) *t)
- int [TraceN](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)
- int [TraceNgen](#) (PHEAD [TRACES](#) *t, WORD number)
- int [Traces](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)
- int [TraceFind](#) (PHEAD WORD *term, WORD *params)
- int [Chisholm](#) (PHEAD WORD *term, WORD level)
- int [TenVecFind](#) (PHEAD WORD *term, WORD *params)
- int [TenVec](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)

4.93.1 Detailed Description

Contains the 'operations' These are the trace routines, the contractions of the Levi-Civita tensors and the tensor to vector/vector to tensor routines. The trace and contraction routines are done in a special way (see commentary with the FIXEDGLOBALS struct)

Definition in file [opera.c](#).

4.93.2 Function Documentation

4.93.2.1 EpfFind()

```
int EpfFind (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line 58 of file [opera.c](#).

4.93.2.2 EpfCon()

```
int EpfCon (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line 212 of file [opera.c](#).

4.93.2.3 EpfGen()

```
WORD EpfGen (
    WORD number,
    WORD * inlist,
    WORD * kron,
    WORD * perm,
    WORD sgn )
```

Definition at line 282 of file [opera.c](#).

4.93.2.4 Trick()

```
WORD Trick (
    WORD * in,
    TRACES * t )
```

Definition at line 331 of file [opera.c](#).

4.93.2.5 Trace4no()

```
int Trace4no (
    WORD number,
    WORD * kron,
    TRACES * t )
```

Definition at line 418 of file [opera.c](#).

4.93.2.6 Trace4()

```
int Trace4 (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line 695 of file [opera.c](#).

4.93.2.7 Trace4Gen()

```
int Trace4Gen (
    PHEAD TRACES * t,
    WORD number )
```

Definition at line 858 of file [opera.c](#).

4.93.2.8 TraceNno()

```
WORD TraceNno (
    WORD number,
    WORD * kron,
    TRACES * t )
```

Definition at line 1343 of file [opera.c](#).

4.93.2.9 TraceN()

```
int TraceN (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line 1384 of file [opera.c](#).

4.93.2.10 TraceNgen()

```
int TraceNgen (
    PHEAD TRACES * t,
    WORD number )
```

Definition at line 1449 of file [opera.c](#).

4.93.2.11 Traces()

```
int Traces (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line [1834](#) of file [opera.c](#).

4.93.2.12 TraceFind()

```
int TraceFind (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line [1856](#) of file [opera.c](#).

4.93.2.13 Chisholm()

```
int Chisholm (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [1966](#) of file [opera.c](#).

4.93.2.14 TenVecFind()

```
int TenVecFind (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line [2181](#) of file [opera.c](#).

4.93.2.15 TenVec()

```
int TenVec (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line [2315](#) of file [opera.c](#).

4.94 opera.c

[Go to the documentation of this file.](#)

```

00001
00009 /* #[ License : */
00010 /*
00011 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 *   When using this file you are requested to refer to the publication
00013 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 *   This is considered a matter of courtesy as the development was paid
00015 *   for by FOM the Dutch physics granting agency and we would like to
00016 *   be able to track its scientific use to convince FOM of its value
00017 *   for the community.
00018 *
00019 *   This file is part of FORM.
00020 *
00021 *   FORM is free software: you can redistribute it and/or modify it under the
00022 *   terms of the GNU General Public License as published by the Free Software
00023 *   Foundation, either version 3 of the License, or (at your option) any later
00024 *   version.
00025 *
00026 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 *   details.
00030 *
00031 *   You should have received a copy of the GNU General Public License along
00032 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #[ License : */
00035 /*
00036     #[ Includes : opera.c
00037 */
00038
00039 #include "form3.h"
00040 /*
00041     int hulp;
00042 */
00043
00044 /*
00045     #[ Includes :
00046     #[ Operations :
00047         #[ EpfFind :           WORD EpfFind(term,params)
00048
00049         Searches for a pair of Levi-Civita tensors that should be
00050         contracted.
00051         If a match is found its settings are recorded in AT.TMout.
00052         type indicates the number of indices that is searched for,
00053         unless all are searched for (type = 0).
00054         number is the number of tensors that should survive contraction.
00055
00056 */
00057
00058 int EpfFind(PHEAD WORD *term, WORD *params)
00059 {
00060     GETBIDENTITY
00061     WORD *t, *m, *r, n1 = 0, n2, min = -1, count, fac;
00062     WORD *c1 = 0, *c2 = 0, sgn = 1;
00063     WORD *tstop, *mstop;
00064     UWORD *facto = (UWORD *)AT.WorkPointer;
00065     WORD ncoef,nfac;
00066     WORD number, type;
00067     if ( ( AT.WorkPointer = (WORD *) (facto + AM.MaxTal) ) > AT.WorkTop ) {
00068         MLOCK(ErrorMessageLock);
00069         MesWork();
00070         MUNLOCK(ErrorMessageLock);
00071         return(-1);
00072     }
00073     number = params[3];
00074     type = params[4];
00075     t = term;
00076     GETSTOP(t,tstop);
00077     t++;
00078     if ( !type ) {
00079         while ( *t != LEVICIVITA && t < tstop ) t += t[1];
00080         if ( t >= tstop ) return(0);
00081         m = t;
00082         while ( *m == LEVICIVITA && m < tstop ) { n1++; m += m[1]; }
00083     AllLev:
00084         if ( n1 <= (number+1) || n1 <= 1 ) return(0);
00085         mstop = m;
00086         m = t + t[1];
00087         do {
00088             while ( m[1] == t[1] ) {
00089                 m += FUNHEAD;

```

```

00090         r = t+FUNHEAD;
00091         count = fac = n1 = n2 = t[1] - FUNHEAD;
00092         while ( n1 && n2 ) {
00093             if ( *m > *r ) {
00094                 r++; n2--;
00095             }
00096             else if ( *m < *r ) {
00097                 m++; n1--;
00098             }
00099             else {
00100                 if ( *m >= AM.OffsetIndex &&
00101                     ( ( *m >= AM.IndDum && AC.lDefDim == fac ) ||
00102                       ( *m < AM.IndDum &&
00103                         indices[*m-AM.OffsetIndex].dimension == fac ) ) ) {
00104                     count--;
00105                 }
00106                 r++; m++; n1--; n2--;
00107             }
00108         }
00109         m += n1;
00110         if ( min < 0 || count < min ) {
00111             c1 = t;
00112             c2 = m - fac - FUNHEAD;
00113             min = count;
00114         }
00115         if ( m >= mstop ) break;
00116     }
00117     t += t[1];
00118     } while ( ( m = t + t[1] ) < mstop );
00119 }
00120 else {
00121     fac = type + FUNHEAD;
00122     while ( *t != LEVICIVITA && t < tstop ) t += t[1];
00123     while ( *t == LEVICIVITA && t < tstop && t[1] != fac ) t += t[1];
00124     if ( t >= tstop ) return(0);
00125     m = t;
00126     while ( *m == LEVICIVITA && m < tstop && m[1] == fac ) { n1++; m += m[1]; }
00127     goto AllLev;
00128 }
00129 /*
00130 We have now the two tensors that give the minimum contraction
00131 in c1 and c2.
00132 Prepare the AT.TMout array;
00133 */
00134 if ( min < 0 ) return(0); /* No matching pair! */
00135 t = c1;
00136 mstop = c2;
00137 fac = t[1] - FUNHEAD;
00138 m = AT.TMout;
00139 *m++ = 3 + (min*2); /* The full length */
00140 *m++ = CONTRACT;
00141 if ( number < 0 ) *m++ = 1;
00142 else *m++ = 0;
00143 n1 = n2 = t[1] - FUNHEAD;
00144 r = c1 + FUNHEAD;
00145 c1 = m;
00146 m = c2 + FUNHEAD;
00147 c2 = c1 + min;
00148 while ( n1 && n2 ) {
00149     if ( *m > *r ) { *c1++ = *r++; n2--; }
00150     else if ( *m < *r ) { *c2++ = *m++; n1--; }
00151     else {
00152         if ( *m < AM.OffsetIndex || ( *m < AM.IndDum &&
00153           ( indices[*m-AM.OffsetIndex].dimension != fac ) ) ||
00154           ( *m >= AM.IndDum && AC.lDefDim != fac ) ) {
00155             *c1++ = *r++; *c2++ = *m++;
00156         }
00157         else { if ( ( n1 ^ n2 ) & 1 ) sgn = -sgn; r++; m++; }
00158         n1--; n2--;
00159     }
00160 }
00161 if ( n1 ) { NCOPY(c2,m,n1); }
00162 else if ( n2 ) { NCOPY(c1,r,n2); }
00163 fac -= min;
00164 m = t + t[1];
00165 while ( m < mstop ) *t++ = *m++;
00166 m += m[1];
00167 while ( m < tstop ) *t++ = *m++;
00168 *t++ = SUBEXPRESSION;
00169 *t++ = SUBEXPSIZE;
00170 *t++ = -1;
00171 *t++ = 1;
00172 *t++ = DUMMYBUFFER;
00173 FILLSUB(t)
00174 r = term;
00175 r += *r - 1;
00176 mstop = r;

```

```

00177     ncoef = REDLENG(*r);
00178     tstop = t;
00179     while ( m < mstop ) *t++ = *m++;
00180     if ( Factorial(BHEAD fac,facto,&nfac) || Mully(BHEAD (UWORD *)tstop,&ncoef,facto,nfac) ) {
00181         MLOCK(ErrorMessageLock);
00182         MesCall("EpFFind");
00183         MUNLOCK(ErrorMessageLock);
00184         SETERROR(-1)
00185     }
00186     tstop += (ABS(ncoef))*2;
00187     if ( sgn < 0 ) ncoef = -ncoef;
00188     ncoef *= 2;
00189     *tstop++ = (ncoef<0)?(ncoef-1):(ncoef+1);
00190     *term = WORDDIF(tstop,term);
00191     return(1);
00192 }
00193
00194 /*
00195     #] EpfFind :
00196     #[ EpfCon :          WORD EpfCon(term,params,num,level)
00197
00198     Contraction of two strings of indices/vectors. They come
00199     from LeviCivita tensors that are being contracted.
00200     term is the term with the subterm to be replaced.
00201     params is the full indicator:
00202         Length, number, raise, parameters.
00203     Length is the length of the parameter field.
00204     number is the number of the operation.
00205     raise tells whether level should be raised afterwards.
00206     the parameters are the two strings.
00207     level is the id level.
00208     The factorial has been multiplied in already.
00209
00210 */
00211
00212 int EpfCon(PHEAD WORD *term, WORD *params, WORD num, WORD level)
00213 {
00214     GETBIDENTITY
00215     WORD *kron, *perm, *termout, *tstop, size2;
00216     WORD *m, *t, sizes, sgn = 0, i;
00217     sizes = *params - 3;
00218     kron = AT.WorkPointer;
00219     perm = (AT.WorkPointer += sizes);
00220     termout = (AT.WorkPointer += sizes);
00221     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
00222     if ( AT.WorkPointer > AT.WorkTop ) {
00223         MLOCK(ErrorMessageLock);
00224         MesWork();
00225         MUNLOCK(ErrorMessageLock);
00226         return(-1);
00227     }
00228     params += 2;
00229     if ( !(*params++) ) level--;
00230     size2 = sizes>>1;
00231     if ( !size2 ) goto DoOnce;
00232     while ( ( sgn = EpfGen(size2,params,kron,perm,sgn) ) != 0 ) {
00233 DoOnce:
00234         t = term;
00235         GETSTOP(t,tstop);
00236         m = termout;
00237         tstop -= SUBEXPSIZE;
00238         while ( t < tstop ) *m++ = *t++;
00239         if ( t[2] != num || *t != SUBEXPRESSION ) {
00240             MLOCK(ErrorMessageLock);
00241             MesPrint("Serious error in EpfCon");
00242             MUNLOCK(ErrorMessageLock);
00243             return(-1);
00244         }
00245         tstop += SUBEXPSIZE;
00246         if ( sizes ) {
00247             *m++ = DELTA;
00248             *m++ = sizes + 2;
00249             t = kron;
00250             i = sizes;
00251             if ( i ) { NCOPY(m,t,i); }
00252         }
00253         t = tstop;
00254         tstop = term + *term;
00255         while ( t < tstop ) *m++ = *t++;
00256         *termout = WORDDIF(m,termout);
00257         m--;
00258         if ( sgn < 0 ) *m = - *m;
00259         if ( *termout ) {
00260             *AN.RepPoint = 1;
00261             AR.expchanged = 1;
00262             AT.WorkPointer = termout + *termout;
00263             if ( Generator(BHEAD termout,level) < 0 ) goto EpfCall;

```

```

00264     }
00265     }
00266     AT.WorkPointer = kron;
00267     return(0);
00268 EpfCall:
00269     if ( AM.tracebackflag ) {
00270         MLOCK(ErrorMessageLock);
00271         MesCall("EpfCon");
00272         MUNLOCK(ErrorMessageLock);
00273     }
00274     return(-1);
00275 }
00276
00277 /*
00278     #] EpfCon :
00279     #[ EpfGen :          WORD EpfGen(number,inlist,kron,perm,sgn)
00280 */
00281
00282 WORD EpfGen(WORD number, WORD *inlist, WORD *kron, WORD *perm, WORD sgn)
00283 {
00284     WORD i, *in2, k, a;
00285     if ( !sgn ) {
00286         in2 = inlist + number;
00287         number *= 2;
00288         for ( i = 1; i < number; i += 2 ) {
00289             *perm++ = i;
00290             *perm++ = i;
00291             *kron++ = *inlist++;
00292             *kron++ = *in2++;
00293         }
00294         if ( number <= 0 ) return(0);
00295         else return(1);
00296     }
00297     number *= 2;
00298     i = number - 1;
00299     while ( ( i -= 2 ) >= 0 ) {
00300         if ( ( k = perm[i] ) != i ) {
00301             sgn = -sgn;
00302             a = kron[i];
00303             kron[i] = kron[k];
00304             kron[k] = a;
00305         }
00306         if ( ( k = ( perm[i] += 2 ) ) < number ) {
00307             a = kron[i];
00308             kron[i] = kron[k];
00309             kron[k] = a;
00310             sgn = -sgn;
00311             for ( k = i + 2; k < number; k += 2 ) perm[k] = k;
00312             return(sgn);
00313         }
00314     }
00315     return(0);
00316 }
00317
00318 /*
00319     #] EpfGen :
00320     #[ Trick :          WORD Trick(in,t)
00321
00322     This routine implements the identity:
00323     g_(j,mu)*g_(j,nu)*g_(j,ro)=e_(mu,nu,ro,si)*g5_(j)*g_(j,si)
00324     +d_(mu,nu)*g_(j,ro)-d_(mu,ro)*g_(j,nu)+d_(nu,ro)*g_(j,mu)
00325     which is for 4 dimensions only!
00326
00327     Note that z->gamm = 1 if there is no g5 present.
00328
00329 */
00330
00331 WORD Trick(WORD *in, TRACES *t)
00332 {
00333     WORD n, n1;
00334     n = t->stap;
00335     n1 = t->stepl;
00336     switch ( t->eers[n] ) {
00337     case 0: {
00338         WORD *p;
00339         p = t->pepf + t->mepf[n];
00340         *p++ = *in++;
00341         *p++ = *in++;
00342         *p++ = *in;
00343         *p = ++(t->mdum);
00344         (t->mepf[n1]) += 4;
00345         *in = t->mdum;
00346         t->gamm = - t->gamm;
00347         t->eers[n] = 5;
00348         break;
00349     }
00350     case 4: {

```

```

00351         WORD *p;
00352         p = t->pdel + t->mdel[n];
00353         (t->mepf[n1]) -= 4;
00354         (t->mdum)--;
00355         *p++ = *in++;
00356         *p = *in++;
00357         *in = *(t->pepf + t->mepf[n] + 2);
00358         (t->mdel[n1]) += 2;
00359         t->gamm = - t->gamm;
00360         break;
00361     }
00362     case 3: {
00363         t->sign1 = - t->sign1;
00364         *(t->pdel + t->mdel[n] + 1) = in[2];
00365         in[2] = in[1];
00366         break;
00367     }
00368     case 2: {
00369         t->sign1 = - t->sign1;
00370         in[2] = in[0];
00371         *(t->pdel + t->mdel[n]) = in[1];
00372         break;
00373     }
00374     case 1: {
00375         in[2] = *(t->pdel + t->mdel[n] + 1);
00376         (t->mdel[n1]) -= 2;
00377         break;
00378     }
00379     default: {
00380         return(0);
00381     }
00382 }
00383 return(--(t->eers[n]));
00384 }
00385
00386 /*
00387 #] Trick :
00388 #[ Trace4no :          WORD Trace4no(number,kron,t)
00389
00390 Takes the trace of a string of gamma matrices in 4 dimensions.
00391 There is no test for indices or vectors that are the same.
00392 The four dimensions refer to the contraction in the algebra:
00393 g_(i,a,b,c) = e_(a,b,c,d)*g_(i,5_,d) + g_(i,a)*d_(b,c)
00394              - g_(i,b)*d_(a,c) + g_(i,c)*d_(a,b)
00395 This simplifies life very much and leads to shorter expressions
00396 than in the n dimensional case.
00397
00398 Parameters:
00399 number: the number of vectors/indices in inlist.
00400 inlist: the indices/vectors in the string.
00401 kron:   the output delta's.
00402 gamma5: the potential gamma5 in front.
00403 t:      the struct for scratch manipulations.
00404 stack:  the space to put all scratch arrays in.
00405
00406 The return value is zero if there are no more terms, 1 if a
00407 term was generated with a positive sign and -1 if a term was
00408 generated with a negative sign.
00409 The value of one is increased to two if the first 4 values
00410 in kron should be interpreted as a Levi-Civita tensor.
00411
00412 Note that kron should have more places reserved than the number
00413 of indices in inlist, because it will contain dummy indices
00414 temporarily. In principle there can be 'number*1/4' extra dummies.
00415
00416 */
00417
00418 int Trace4no(WORD number, WORD *kron, TRACES *t)
00419 {
00420     WORD i;
00421     WORD *p, *m;
00422     WORD *stop, oldsign;
00423     int retval;
00424     if ( !t->sgn ) {          /* Startup */
00425         if ( ( number < 0 ) || ( number & 1 ) ) return(0);
00426         if ( number <= 2 ) {
00427             if ( t->gamma5 == GAMMA5 ) return(0);
00428             if ( number == 2 ) {
00429                 *kron++ = *t->inlist;
00430                 *kron++ = t->inlist[1];
00431             }
00432             return(1);
00433         }
00434         t->sgn = 1;
00435         {
00436             WORD nhalf = number >> 1;
00437             WORD ndouble = number * 2;

```

```

00438         p = t->eers;
00439         t->eers = p;      p += nhalf;
00440         t->mepf = p;      p += nhalf;
00441         t->mdel = p;      p += nhalf;
00442         t->pdel = p;      p += number + nhalf;
00443         t->pepf = p;      p += ndouble;
00444         t->e4 = p;        p += number;
00445         t->e3 = p;        p += ndouble;
00446         t->nt3 = p;       p += nhalf;
00447         t->nt4 = p;       p += nhalf;
00448         t->j3 = p;        p += ndouble;
00449         t->j4 = p;
00450     }
00451     t->mepf[0] = 0;
00452     t->mdel[0] = 0;
00453     t->mdum = AM.mTraceDum;
00454     t->kstep = -2;
00455     t->step1 = 0;
00456     t->sign1 = 1;
00457     t->lc3 = -1;
00458     t->lc4 = -1;
00459     t->gamm = 1;
00460
00461     do {
00462         t->stap = (t->step1)++;
00463         t->kstep += 2;
00464         t->eers[t->stap] = 0;
00465         t->mepf[t->step1] = t->mepf[t->stap];
00466         t->mdel[t->step1] = t->mdel[t->stap];
00467     CallTrick: while ( !Trick(t->inlist+t->kstep,t) ) {
00468         t->kstep -= 2;
00469         t->step1 = (t->stap)--;
00470         if ( t->stap < 0 ) {
00471             return(0);
00472         }
00473     }
00474     } while ( t->kstep < (number-4) );
00475 /*
00476     Take now the trace of the leftover matrices.
00477     If gamma5 causes the term to vanish there will be a
00478     renewed call to Trick for its next term.
00479 */
00480     t->sign2 = t->sign1;
00481     if ( ( t->gamma5 == GAMMA7 ) && ( t->gamm == -1 ) ) {
00482         t->sign2 = - t->sign2;
00483     }
00484     else if ( ( t->gamma5 == GAMMA5 ) && ( t->gamm == 1 ) ) {
00485         goto CallTrick;
00486     }
00487     else if ( ( t->gamma5 == GAMMA1 ) && ( t->gamm == -1 ) ) {
00488         goto CallTrick;
00489     }
00490     p = t->pdel + t->mdel[t->step1];
00491     *p++ = t->inlist[t->kstep+2];
00492     *p++ = t->inlist[t->kstep+3];
00493 /*
00494     Now the trace has been expressed in terms of Levi-Civita tensors
00495     and Kronecker delta's.
00496     The Levi-Civita tensors are in t->pepf
00497     and there are t->mepf[step1] elements in this array.
00498     The Kronecker delta's are in t->pdel
00499     and there are t->mdel[step1] elements in this array.
00500
00501     Next we rake the Levi-Civita tensors together such that there
00502     is an optimal use of the contractions.
00503 */
00504     {
00505         WORD ae;
00506         ae = t->mepf[t->step1];
00507         t->ad = t->mdel[t->step1]+2;
00508         t->a4 = 0;
00509         t->a3 = 0;
00510         while ( ( ae -= 4 ) >= 0 ) {
00511             if ( t->pepf[ae] > AM.mTraceDum && t->pepf[ae] <= t->mdum ) {
00512                 p = t->e3 + t->a3;
00513                 m = t->pepf + ae;
00514                 for ( i = 0; i < 3; i++ ) {
00515                     p[3] = m[3-i];
00516                     *p++ = m[i-4];
00517                 }
00518                 t->a3 += 6;
00519                 ae -= 4;
00520             }
00521             else {
00522                 p = t->e4 + t->a4;
00523                 m = t->pepf + ae;
00524                 for ( i = 0; i < 4; i++ ) *p++ = *m++;

```



```

00525         t->a4 += 4;
00526     }
00527 }
00528 }
00529 /*
00530 Now e3 contains pairs of LeviCivita tensors that have
00531 three indices each and a3 is the total number of indices.
00532 e4 contains individual tensors with 4 indices.
00533 Some indices may be contracted with Kronecker delta's.
00534 Contract the e3 tensors first.
00535 */
00536 while ( t->a3 > 0 ) {
00537     t->nt3[+(t->lc3)] = 0;
00538     while ( ( t->nt3[t->lc3] = EpfGen(3,t->e3+t->a3-6,
00539         t->pdel+t->ad,t->j3+6*t->lc3,oldsign = t->nt3[t->lc3]) ) == 0 ) {
00540         if ( oldsign < 0 ) t->sign2 = - t->sign2;
00541         (t->lc3)--;
00542     }
00543     NextE3: if ( t->lc3 < 0 ) goto CallTrick;
00544     t->ad -= 6;
00545     t->a3 += 6;
00546     if ( oldsign ) {
00547         if ( oldsign != t->nt3[t->lc3] ) t->sign2 = - t->sign2;
00548     }
00549     else if ( t->nt3[t->lc3] < 0 ) t->sign2 = - t->sign2;
00550     t->a3 -= 6;
00551     t->ad += 6;
00552 }
00553 /*
00554 Contract the e4 tensors.
00555 */
00556 while ( t->a4 > 4 ) {
00557     t->nt4[+(t->lc4)] = 0;
00558     while ( ( t->nt4[t->lc4] = EpfGen(4,t->e4+t->a4-8,
00559         t->pdel+t->ad,t->j4+8*t->lc4,oldsign = t->nt4[t->lc4]) ) == 0 ) {
00560         if ( oldsign < 0 ) t->sign2 = - t->sign2;
00561         (t->lc4)--;
00562     }
00563     NextE4: if ( t->lc4 < 0 ) goto NextE3;
00564     t->ad -= 8;
00565     t->a4 += 8;
00566     if ( oldsign ) {
00567         if ( oldsign != t->nt4[t->lc4] ) t->sign2 = - t->sign2;
00568     }
00569     else if ( t->nt4[t->lc4] < 0 ) t->sign2 = - t->sign2;
00570     t->a4 -= 8;
00571     t->ad += 8;
00572 }
00573 /*
00574 Finally the extra dummy indices can be eliminated.
00575 Note that there are currently t->ad words in t->pdel forming
00576 t->ad / 2 Kronecker delta's. We are however not allowed to
00577 alter anything in these arrays, so the results should be
00578 copied to kron.
00579 */
00580 m = kron;
00581 if ( t->a4 == 4 ) {
00582     p = t->e4;
00583     *m++ = *p++; *m++ = *p++; *m++ = *p++; *m++ = *p++;
00584     retval = 2;
00585 }
00586 else retval = 1;
00587 if ( t->sign2 < 0 ) retval = - retval;
00588 p = t->pdel;
00589 for ( i = 0; i < t->ad; i++ ) *m++ = *p++;
00590 p = kron;
00591 if ( t->a4 == 4 ) {
00592     /*
00593     Test for dummies in the last position of the e_.
00594     */
00595     stop = p + t->ad + 4;
00596     p += 3;
00597     while ( *p >= AM.mTraceDum && *p <= t->mdum ) {
00598         m = p + 1;
00599         do {
00600             if ( *m == *p ) {
00601                 *p = m[1];
00602                 *m = *--stop;
00603                 m[1] = *--stop;
00604                 break;
00605             }
00606             else if ( m[1] == *p ) {
00607                 *p = *m;
00608                 *m = *--stop;
00609                 m[1] = *--stop;
00610             }
00611         }

```

```

00612         break;
00613     }
00614     else m += 2;
00615 } while ( m < stop );
00616 }
00617 p++;
00618 }
00619 else stop = p + t->ad;
00620 while ( p < (stop-2) ) {
00621     while ( *p >= AM.mTraceDum && *p <= t->mdum ) {
00622         m = p + 2;
00623         do {
00624             if ( *m == *p ) {
00625                 *p = m[1];
00626                 *m = *--stop;
00627                 m[1] = *--stop;
00628                 break;
00629             }
00630             else if ( m[1] == *p ) {
00631                 *p = *m;
00632                 *m = *--stop;
00633                 m[1] = *--stop;
00634                 break;
00635             }
00636             else m += 2;
00637         } while ( m < stop );
00638     }
00639     p++;
00640     while ( *p >= AM.mTraceDum && *p <= t->mdum ) {
00641         m = p + 1;
00642         do {
00643             if ( *m == *p ) {
00644                 *p = m[1];
00645                 *m = *--stop;
00646                 m[1] = *--stop;
00647                 break;
00648             }
00649             else if ( m[1] == *p ) {
00650                 *p = *m;
00651                 *m = *--stop;
00652                 m[1] = *--stop;
00653                 break;
00654             }
00655             else m += 2;
00656         } while ( m < stop );
00657     }
00658     p++;
00659 }
00660 return(retval);
00661 }
00662 if ( number <= 2 ) return(0);
00663 else { goto NextE4; }
00664 }
00665
00666 /*
00667     #] Trace4no :
00668     #[ Trace4 :          WORD Trace4(term,params,num,level)
00669
00670     Generates traces of the string of gamma matrices in 'instring'.
00671
00672     The difference with the routine tracen ( for n dimensions )
00673     lies in the treatment of gamma 5 and the specific form
00674     of the Chisholm identities. The identities used here are
00675     g(mu)*g(a1)*...*g(an)*g(mu)=
00676     n=odd: -2*g(an)*...*g(a1)      ( reversed order )
00677     n=even: 2*g(an)*g(a1)*...*g(a(n-1))
00678             +2*g(a(n-1))*...*g(a1)*g(an)
00679     There is a special case for n=2 : 4*d(a1,a2)*gi
00680
00681     The main difference with the old fortran version lies in
00682     the recursion that is used here. That cleans up the variables
00683     very much.
00684
00685     The contents of the AT.TMout array are:
00686     length,type,gamma5,gamma's
00687
00688     The space for the vectors in t is at most 14 * number.
00689
00690     The condition params[5] == 0 corresponds to finding gamma6*gamma7
00691     during the pick up of the matrices.
00692 */
00693
00694
00695 int Trace4(PHEAD WORD *term, WORD *params, WORD num, WORD level)
00696 {
00697     GETBIDENTITY
00698     TRACES *t;

```

```

00699     WORD *p, *m, number, i;
00700     WORD *OldW;
00701     WORD j, minimum, minimum2, *min, *stopper;
00702     int ret;
00703     OldW = AT.WorkPointer;
00704     if ( AN.numtracesctack >= AN.intracestack ) {
00705         number = AN.intracestack + 2;
00706         t = (TRACES *)Malloc1(number*sizeof(TRACES),"TRACES-struct");
00707         if ( AN.tracestack ) {
00708             for ( i = 0; i < AN.intracestack; i++ ) { t[i] = AN.tracestack[i]; }
00709             M_free(AN.tracestack,"TRACES-struct");
00710         }
00711         AN.tracestack = t;
00712         AN.intracestack = number;
00713     }
00714
00715     number = *params - 6;
00716     if ( number < 0 || ( number & 1 ) || !params[5] ) return(0);
00717
00718     t = AN.tracestack + AN.numtracesctack;
00719     AN.numtracesctack++;
00720
00721     t->finalstep = ( params[2] & 16 ) ? 1 : 0;
00722     t->gamma5 = params[3];
00723     if ( t->finalstep && t->gamma5 != GAMMA1 ) {
00724         MLOCK(ErrorMessageLock);
00725         MesPrint("Gamma5 not allowed in this option of the trace command");
00726         MUNLOCK(ErrorMessageLock);
00727         AN.numtracesctack--;
00728         SETERROR(-1)
00729     }
00730     t->inlist = AT.WorkPointer;
00731     t->accup = t->accu = t->inlist + number;
00732     t->perm = t->accu + (number*2);
00733     t->eers = t->perm + number;
00734     if ( ( AT.WorkPointer += 19 * number ) >= AT.WorkTop ) {
00735         MLOCK(ErrorMessageLock);
00736         MesWork();
00737         MUNLOCK(ErrorMessageLock);
00738         return(-1);
00739     }
00740     t->num = num;
00741     t->level = level;
00742     p = t->inlist;
00743     m = params+6;
00744     for ( i = 0; i < number; i++ ) *p++ = *m++;
00745     t->term = term;
00746     t->factor = params[4];
00747     t->allsign = params[5];
00748     if ( number >= 10 || ( t->gamma5 != GAMMA1 && number > 4 ) ) {
00749         /*
00750             The next code should 'normal order' the string
00751             We need the lexicographic smallest string, taking also the
00752             reverse strings into account.
00753         */
00754         minimum = 0; min = t->inlist;
00755         stopper = min + number;
00756         for ( i = 1; i < number; i++ ) {
00757             p = min;
00758             m = t->inlist + i;
00759             for ( j = 0; j < number; j++ ) {
00760                 if ( *p < *m ) break;
00761                 if ( *p > *m ) {
00762                     min = t->inlist+i;
00763                     minimum = i;
00764                     break;
00765                 }
00766                 p++; m++;
00767                 if ( m >= stopper ) m = t->inlist;
00768                 if ( p >= stopper ) p = t->inlist;
00769             }
00770         }
00771         p = min;
00772         min = m = AT.WorkPointer;
00773         i = number;
00774         while ( --i >= 0 ) {
00775             *m++ = *p++;
00776             if ( p >= stopper ) p = t->inlist;
00777         }
00778         p = t->inlist;
00779         m = min;
00780         i = number;
00781         while ( --i >= 0 ) *p++ = *m++;
00782         p = t->inlist;
00783         m = stopper;
00784         while ( p < m ) { /* reverse string */
00785             i = *p; *p++ = *--m; *m = i;

```

```

00786     }
00787     minimum2 = 0;
00788     for ( i = 0; i < number; i++ ) {
00789         p = min;
00790         m = t->inlist + i;
00791         for ( j = 0; j < number; j++ ) {
00792             if ( *p < *m ) break;
00793             if ( *p > *m ) {
00794                 m = t->inlist + i;
00795                 p = min;
00796                 j = number;
00797                 while ( --j >= 0 ) {
00798                     *p++ = *m++;
00799                     if ( m >= stopper ) m = t->inlist;
00800                 }
00801                 minimum2 = i;
00802                 break;
00803             }
00804             p++; m++;
00805             if ( m >= stopper ) m = t->inlist;
00806         }
00807     }
00808     minimum ^= minimum2;
00809     if ( ( minimum & 1 ) != 0 ) {
00810         if ( t->gamma5 == GAMMA5 ) t->allsign = - t->allsign;
00811         else if ( t->gamma5 != GAMMA1 )
00812             t->gamma5 = GAMMA6 + GAMMA7 - t->gamma5;
00813     }
00814     p = min; m = t->inlist; i = number;
00815     while ( --i >= 0 ) *m++ = *p++;
00816 /*
00817     Now the trace is in normal order
00818 */
00819 }
00820 ret = Trace4Gen(BHEAD t,number);
00821 AT.WorkPointer = OldW;
00822 AN.numtracesctack--;
00823 return(ret);
00824 }
00825
00826 /*
00827 #] Trace4 :
00828 #[ Trace4Gen :          WORD Trace4Gen(t,number)
00829
00830 The recursive breakdown of a trace in 4 dimensions.
00831 We test first whether the trace has zero or two gamma's left.
00832 This case can be done quickly.
00833 Next we test whether we can eliminate adjacent objects that are
00834 the same.
00835 Then we test for Chisholm identities (I). First for identities
00836 with an odd number of gamma matrices (II), then for those with an
00837 even number of matrices (III). The special thing here is the demand
00838 that the contraction be between indices with 4 dimensions only.
00839 Then there is a scan for objects that are the same, not regarding
00840 their type (IV). This is exactly the same as in n dimensions.
00841 Finally we have a string left in which all objects are different (V).
00842 This case is treated by the routine Trace4no (no stands for no
00843 objects are the same).
00844
00845 In case I we have one d_ of which the result of the contraction
00846 has not yet been fixed.
00847 Case II gives just a reordering of the matrices and a factor -2.
00848 Case III gives two terms: one for the anti commutation, such that
00849 the number of intermediate matrices becomes odd and the other
00850 from the Chisholm rule for an odd number of matrices. Both have
00851 a factor 2.
00852 Case IV gives m+1 terms when m is the number of matrices inbetween.
00853 We take the shortest path. The sign alternates and all terms have
00854 a factor two, except for the last one.
00855
00856 */
00857
00858 int Trace4Gen(PHEAD TRACES *t, WORD number)
00859 {
00860     GETBIDENTITY
00861     WORD *termout, *stop;
00862     WORD *p, *m, oldval;
00863     WORD *pold, *mold, diff, *oldstring, cp;
00864 /*
00865     #[ Special cases :
00866 */
00867     if ( number <= 2 ) { /* Special cases */
00868         if ( t->gamma5 == GAMMA5 ) return(0);
00869         termout = AT.WorkPointer;
00870         p = t->termp;
00871         stop = p + *p;
00872         m = termout;

```

```

00873     p++;
00874     if ( p < stop ) do {
00875         if ( *p == SUBEXPRESSION && p[2] == t->num ) {
00876             oldstring = p;
00877             p = t->termp;
00878             do { *m++ = *p++; } while ( p < oldstring );
00879             p += p[1];
00880             *m++ = AC.lUniTrace[0];
00881             *m++ = AC.lUniTrace[1];
00882             *m++ = AC.lUniTrace[2];
00883             *m++ = AC.lUniTrace[3];
00884             if ( number == 2 || t->accup > t->accu ) {
00885                 oldstring = m;
00886                 *m++ = DELTA;
00887                 *m++ = 4;
00888                 if ( number == 2 ) {
00889                     *m++ = t->inlist[0];
00890                     *m++ = t->inlist[1];
00891                 }
00892                 if ( t->accup > t->accu ) {
00893                     pold = p;
00894                     p = t->accu;
00895                     while ( p < t->accup ) *m++ = *p++;
00896                     oldstring[1] = WORDDIF(m,oldstring);
00897                     p = pold;
00898                 }
00899             }
00900             if ( t->factor ) {
00901                 *m++ = SNUMBER;
00902                 *m++ = 4;
00903                 *m++ = 2;
00904                 *m++ = t->factor;
00905             }
00906             do { *m++ = *p++; } while ( p < stop );
00907             *termout = WORDDIF(m,termout);
00908             if ( t->allsign < 0 ) m[-1] = -m[-1];
00909             if ( ( AT.WorkPointer = m ) > AT.WorkTop ) {
00910                 MLOCK(ErrorMessageLock);
00911                 MesWork();
00912                 MUNLOCK(ErrorMessageLock);
00913                 return(-1);
00914             }
00915             *AN.RepPoint = 1;
00916             AR.expchanged = 1;
00917             if ( *termout ) {
00918                 *AN.RepPoint = 1;
00919                 AR.expchanged = 1;
00920                 if ( Generator(BHEAD termout,t->level) ) goto TracCall;
00921             }
00922             AT.WorkPointer= termout;
00923             return(0);
00924         }
00925         p += p[1];
00926     } while ( p < stop );
00927     return(0);
00928 }
00929 /*
00930     #] Special cases :
00931     #[ Adjacent objects :
00932 */
00933 p = t->inlist;
00934 stop = p + number - 1;
00935 if ( *p == *stop ) {          /* First and last of string */
00936     oldval = *p;
00937     *(t->accup)++ = *p;
00938     *(t->accup)++ = *p;
00939     m = p+1;
00940     while ( m < stop ) *p++ = *m++;
00941     if ( t->gamma5 != GAMMA1 ) {
00942         if ( t->gamma5 == GAMMA5 ) t->allsign = - t->allsign;
00943         else if ( t->gamma5 == GAMMA6 ) t->gamma5 = GAMMA7;
00944         else if ( t->gamma5 == GAMMA7 ) t->gamma5 = GAMMA6;
00945     }
00946     if ( Trace4Gen(BHEAD t,number-2) ) goto TracCall;
00947     t = AN.tracestack + AN.numtracesctack - 1;
00948     if ( t->gamma5 != GAMMA1 ) {
00949         if ( t->gamma5 == GAMMA5 ) t->allsign = - t->allsign;
00950         else if ( t->gamma5 == GAMMA6 ) t->gamma5 = GAMMA7;
00951         else if ( t->gamma5 == GAMMA7 ) t->gamma5 = GAMMA6;
00952     }
00953     while ( p > t->inlist ) *--m = *--p;
00954     *p = *stop = oldval;
00955     t->accup -= 2;
00956     return(0);
00957 }
00958 do {
00959     if ( *p == p[1] ) {          /* Adjacent in string */

```

```

00960         oldval = *p;
00961         pold = p;
00962         m = p+2;
00963         *(t->accup)++ = *p;
00964         *(t->accup)++ = *p;
00965         while ( m <= stop ) *p++ = *m++;
00966         if ( Trace4Gen(BHEAD t,number-2) ) goto TracCall;
00967         t = AN.tracestack + AN.numtracesctack - 1;
00968         while ( p > pold ) *--m = *--p;
00969         *p++ = oldval;
00970         *p++ = oldval;
00971         t->accup -= 2;
00972         return(0);
00973     }
00974     p++;
00975 } while ( p < stop );
00976 /*
00977     #] Adjacent objects :
00978     #[ Odd Contraction :
00979 */
00980 p = t->inlist;
00981 stop = p + number;
00982 do {
00983     if ( *p >= AM.OffsetIndex && (
00984         ( *p < WILDOFFSET + AM.OffsetIndex &&
00985         indices[*p-AM.OffsetIndex].dimension == 4 )
00986     || ( *p >= WILDOFFSET + AM.OffsetIndex && AC.lDefDim == 4 ) ) ) {
00987         m = p+2;
00988         while ( m < stop ) {
00989             if ( *p == *m ) {
00990                 pold = p;
00991                 mold = m;
00992                 oldval = *p;
00993                 (t->factor)++;
00994                 t->allsign = - t->allsign;
00995                 *p++ = *--m;
00996                 m--;
00997                 while ( m > p ) { diff = *p; *p++ = *m; *m-- = diff; }
00998                 p = mold - 1;
00999                 m = mold + 1;
01000                 while ( m < stop ) *p++ = *m++;
01001                 if ( Trace4Gen(BHEAD t,number-2) ) goto TracCall;
01002                 t = AN.tracestack + AN.numtracesctack - 1;
01003                 m--;
01004                 while ( m > mold ) *m-- = *--p;
01005                 p = pold;
01006                 *m-- = oldval;
01007                 *m-- = *p;
01008                 *p++ = oldval;
01009                 while ( m > p ) { diff = *p; *p++ = *m; *m-- = diff; }
01010                 t->allsign = - t->allsign;
01011                 (t->factor)--;
01012                 return(0);
01013             }
01014             m += 2;
01015         }
01016     }
01017     p++;
01018 } while ( p < stop );
01019 /*
01020     #] Odd Contraction :
01021     #[ Even Contraction :
01022     First the case with two matrices inbetween.
01023 */
01024 p = t->inlist;
01025 stop = p + number;
01026 do {
01027     if ( *p >= AM.OffsetIndex && (
01028         ( *p < WILDOFFSET + AM.OffsetIndex &&
01029         indices[*p-AM.OffsetIndex].dimension == 4 )
01030     || ( *p >= WILDOFFSET + AM.OffsetIndex && AC.lDefDim == 4 ) ) ) {
01031         m = p+3;
01032         if ( m >= stop ) m -= number;
01033         if ( *p == *m ) {
01034             WORD oldfactor, old5;
01035             oldstring = AT.WorkPointer;
01036             AT.WorkPointer += number;
01037             oldfactor = t->allsign;
01038             old5 = t->gamma5;
01039             if ( m < p ) cp = (WORDDIF(m,t->inlist) + 1) & 1;
01040             else cp = 0;
01041             if ( cp && ( t->gamma5 != GAMMA1 ) ) {
01042                 if ( t->gamma5 == GAMMA5 ) t->allsign = -t->allsign;
01043                 else if ( t->gamma5 == GAMMA6 ) t->gamma5 = GAMMA7;
01044                 else if ( t->gamma5 == GAMMA7 ) t->gamma5 = GAMMA6;
01045             }
01046             mold = m;

```

```

01047         p = oldstring;
01048         m = t->inlist;
01049         while ( m < stop ) *p++ = *m++;
01050 /*
01051         Rotate the string
01052 */
01053         m = mold + 1;
01054         p = t->inlist;
01055         while ( m < stop ) *p++ = *m++;
01056         m = oldstring;
01057         if ( !cp && ((WORDDIFF(stop,p))&1) != 0 && ( t->gamma5 != GAMMA1 ) ) {
01058             if ( t->gamma5 == GAMMA5 ) t->allsign = -t->allsign;
01059             else if ( t->gamma5 == GAMMA6 ) t->gamma5 = GAMMA7;
01060             else if ( t->gamma5 == GAMMA7 ) t->gamma5 = GAMMA6;
01061         }
01062         while ( p < stop ) *p++ = *m++;
01063         t->factor += 2;
01064         m = p - 3;
01065         p = t->inlist;
01066         oldval = number - 4;
01067         while ( oldval > 0 ) {
01068             if ( *p >= AM.OffsetIndex && (
01069                 ( *p < WILDOFFSET + AM.OffsetIndex &&
01070                   indices[*p-AM.OffsetIndex].dimension )
01071                 || ( *p >= WILDOFFSET + AM.OffsetIndex && AC.lDefDim ) ) ) {
01072                 if ( *p == *m ) {
01073                     *p = m[1];
01074                     break;
01075                 }
01076                 else if ( *p == m[1] ) {
01077                     *p = *m;
01078                     break;
01079                 }
01080             }
01081             p++; oldval--;
01082         }
01083         if ( oldval <= 0 ) {
01084             *(t->accup)++ = *m++;
01085             *(t->accup)++ = *m++;
01086         }
01087         if ( Trace4Gen(BHEAD t,number-4) ) goto TracCall;
01088         t = AN.tracestack + AN.numtracesctack - 1;
01089         t->factor -= 2;
01090         if ( oldval <= 0 ) t->accup -= 2;
01091         t->gamma5 = old5;
01092         t->allsign = oldfactor;
01093         AT.WorkPointer = p = oldstring;
01094         m = t->inlist;
01095         while ( m < stop ) *m++ = *p++;
01096         return(0);
01097     }
01098 }
01099 p++;
01100 } while ( p < stop );
01101 /*
01102     The case with at least 4 matrices inbetween.
01103 */
01104 p = t->inlist;
01105 stop = p + number;
01106 do {
01107     if ( *p >= AM.OffsetIndex && (
01108         ( *p < WILDOFFSET + AM.OffsetIndex &&
01109           indices[*p-AM.OffsetIndex].dimension == 4 )
01110         || ( *p >= WILDOFFSET + AM.OffsetIndex && AC.lDefDim == 4 ) ) ) {
01111         m = p+5;
01112         while ( m < stop ) {
01113             if ( *p == *m ) {
01114                 WORD *pex, *mex;
01115                 pold = p;
01116                 mold = m;
01117                 oldval = *p;
01118             /*
01119                 g_(1,mu)*g_(1,a1)*...*g_(1,aj)*g_(1,an)*g_(1,mu) ->
01120                 first:
01121                 2*g_(1,an)*g_(1,a1)*...*g_(1,aj)
01122             */
01123                 (t->factor)++;
01124             /*
01125                 The variable hulp seems unnecessary
01126                 *p = hulp = m[-1];
01127             */
01128                 *p = m[-1];
01129                 p = m - 1;
01130                 m++;
01131                 while ( m < stop ) *p++ = *m++;
01132                 if ( Trace4Gen(BHEAD t,number-2) ) goto TracCall;
01133                 t = AN.tracestack + AN.numtracesctack - 1;

```

```

01134         pex = p; mex = m;
01135         p = pold;
01136         m = mold - 2;
01137         while ( m > p ) { diff = *p; *p++ = *m; *m-- = diff; }
01138     /*
01139         and then:
01140         2*g_(1,aj)*...*g_(1,al)*g_(1,an)
01141     */
01142         if ( Trace4Gen(BHEAD t,number-2) ) goto TracCall;
01143         t = AN.tracestack + AN.numtracesctack - 1;
01144         p = pold;
01145         m = mold - 2;
01146         while ( m > p ) { diff = *p; *p++ = *m; *m-- = diff; }
01147         m = mex;
01148         p = pex;
01149         m--;
01150         while ( m > mold ) *m-- = ---p;
01151         m = mold;
01152         *m-- = oldval;
01153         p = pold;
01154         *m = *p;
01155         *p = oldval;
01156         (t->factor)--;
01157         return(0);
01158     }
01159     m += 2;
01160 }
01161 }
01162 p++;
01163 } while ( p < stop );
01164 /*
01165     #] Even Contraction :
01166     #[ Same Objects :
01167 */
01168 p = t->inlist;
01169 stop = p + number - 1;
01170 diff = 2;
01171 do {
01172     p = t->inlist;
01173     while ( p <= stop ) {
01174         m = p + diff;
01175         if ( m > stop ) m -= number;
01176         if ( *p == *m ) {
01177             WORD oldfactor, c, old5;
01178             oldfactor = t->allsign;
01179             old5 = t->gamma5;
01180             cp = (WORDDIF(m,t->inlist)) & 1;
01181             if ( !cp && ( t->gamma5 != GAMMA1 ) ) {
01182                 if ( t->gamma5 == GAMMA5 ) t->allsign = -t->allsign;
01183                 else if ( t->gamma5 == GAMMA6 ) t->gamma5 = GAMMA7;
01184                 else if ( t->gamma5 == GAMMA7 ) t->gamma5 = GAMMA6;
01185             }
01186             oldstring = AT.WorkPointer;
01187             AT.WorkPointer += number;
01188             mold = m;
01189             oldval = *p;
01190             p = oldstring;
01191             m = t->inlist;
01192             while ( m <= stop ) *p++ = *m++;
01193         /*
01194             Rotate the string
01195         */
01196         m = mold + 1;
01197         p = t->inlist;
01198         while ( m <= stop ) *p++ = *m++;
01199         m = oldstring;
01200         while ( p <= stop ) *p++ = *m++;
01201         (t->factor)++;
01202         p -= diff + 1;
01203         m = stop;
01204         *(t->accup) = oldval;
01205         t->accup += 2;
01206         m--;
01207         while ( m > p ) {
01208             c = t->accup[-1];
01209             t->accup[-1] = *m;
01210             *m = c;
01211             if ( Trace4Gen(BHEAD t,number-2) ) goto Trac4Call;
01212             t = AN.tracestack + AN.numtracesctack - 1;
01213             m--;
01214             t->allsign = - t->allsign;
01215         }
01216         c = t->accup[-1];
01217         t->accup[-1] = *m;
01218         *m = c;
01219         (t->factor)--;
01220         if ( Trace4Gen(BHEAD t,number-2) ) goto Trac4Call;

```



```

01221         t = AN.tracestack + AN.numtracesctack - 1;
01222         t->accup -= 2;
01223         t->allsign = oldfactor;
01224         AT.WorkPointer = p = oldstring;
01225         m = t->inlist;
01226         while ( m <= stop ) *m++ = *p++;
01227         t->gamma5 = old5;
01228         return(0);
01229     }
01230     p++;
01231 }
01232 } while ( ++diff <= (number>>1) );
01233 /*
01234     #] Same Objects :
01235     #[ All Different :
01236
01237     Here we have a string with all different objects.
01238
01239 */
01240     t->sgn = 0;
01241     termout = AT.WorkPointer;
01242     for(;;) {
01243         if ( t->finalstep == 0 ) diff = Trace4no(number,t->accup,t);
01244         else diff = TraceNno(number,t->accup,t);
01245     /* while ( ( diff = Trace4no(number,t->accup,t) ) != 0 ) */
01246         if ( diff == 0 ) break;
01247         p = t->termp;
01248         stop = p + *p;
01249         m = termout;
01250         p++;
01251         if ( p < stop ) do {
01252             if ( *p == SUBEXPRESSION && p[2] == t->num ) {
01253                 oldstring = p;
01254                 p = t->termp;
01255                 do { *m++ = *p++; } while ( p < oldstring );
01256                 p += p[1];
01257                 pold = p;
01258                 *m++ = AC.lUniTrace[0];
01259                 *m++ = AC.lUniTrace[1];
01260                 *m++ = AC.lUniTrace[2];
01261                 *m++ = AC.lUniTrace[3];
01262                 *m++ = SNUMBER;
01263                 *m++ = 4;
01264                 *m++ = 2;
01265                 *m++ = t->factor;
01266                 p = t->accup;
01267                 oldval = number;
01268                 if ( diff == 2 || diff == -2 ) {
01269                     *m++ = LEVICIVITA;
01270                     *m++ = 4+FUNHEAD;
01271                     *m++ = DIRTYFLAG;
01272                     FILLFUN3(m)
01273                     *m++ = *p++; *m++ = *p++; *m++ = *p++; *m++ = *p++;
01274                     oldval -= 4;
01275                 }
01276                 if ( oldval > 0 || t->accup > t->accu ) {
01277                     oldstring = m;
01278                     *m++ = DELTA;
01279                     *m++ = oldval + 2;
01280                     if ( oldval > 0 ) NCOPY(m,p,oldval);
01281                     if ( t->accup > t->accu ) {
01282                         p = t->accu;
01283                         while ( p < t->accup ) *m++ = *p++;
01284                         oldstring[1] = WORDDIF(m,oldstring);
01285                     }
01286                 }
01287                 p = pold;
01288                 do { *m++ = *p++; } while ( p < stop );
01289                 *termout = WORDDIF(m,termout);
01290                 if ( ( diff ^ t->allsign ) < 0 ) m[-1] = - m[-1];
01291                 if ( ( AT.WorkPointer = m ) > AT.WorkTop ) {
01292                     MLOCK(ErrorMessageLock);
01293                     MesWork();
01294                     MUNLOCK(ErrorMessageLock);
01295                     return(-1);
01296                 }
01297                 if ( *termout ) {
01298                     *AN.RepPoint = 1;
01299                     AR.expchanged = 1;
01300                     if ( Generator(BHEAD termout,t->level) ) {
01301                         AT.WorkPointer = termout;
01302                         goto TracCall;
01303                     }
01304                     t = AN.tracestack + AN.numtracesctack - 1;
01305                 }
01306                 break;
01307             }

```

```

01308         p += p[1];
01309     } while ( p < stop );
01310 }
01311 AT.WorkPointer = termout;
01312 return(0);
01313
01314 /*
01315     #] All Different :
01316 */
01317 Trac4Call:
01318     AT.WorkPointer = oldstring;
01319 TracCall:
01320     if ( AM.tracebackflag ) {
01321         MLOCK(ErrorMessageLock);
01322         MesCall("Trace4Gen");
01323         MUNLOCK(ErrorMessageLock);
01324     }
01325     return(-1);
01326 }
01327
01328 /*
01329     #] Trace4Gen :
01330     #[ TraceNno :          WORD TraceNno(number,kron,t)
01331
01332     Routine takes the trace in N dimensions of a string
01333     of gamma matrices. It is assumed that there are no
01334     contractions and no vectors that are the same. For
01335     the treatment of those cases there are special routines,
01336     that call this routine as a final stage.
01337     The calling routine must reserve 'number' WORDs for perm
01338     and kron each.
01339     kron and perm may not be altered during the generation!
01340
01341 */
01342 WORD TraceNno(WORD number, WORD *kron, TRACES *t)
01343 {
01344     WORD i, j, a, *p;
01345     if ( !t->sgn ) {
01346         if ( !number || ( number & 1 ) ) return(0);
01347         p = t->inlist;
01348         for ( i = 0; i < number; i++ ) {
01349             t->perm[i] = i;
01350             *kron++ = *p++;
01351         }
01352         t->sgn = 1;
01353         return(1);
01354     }
01355     else {
01356         i = number - 3;
01357         while ( i > 0 ) {
01358             a = kron[i];
01359             p = t->perm + i;
01360             for ( j = i + 1; j <= *p; j++ ) kron[j-1] = kron[j];
01361             kron[( *p )++] = a;
01362             if ( *p < number ) {
01363                 a = kron[*p];
01364                 j = *p;
01365                 while ( j >= (i+1) ) { kron[j] = kron[j-1]; j--; }
01366                 kron[i] = a;
01367                 number -= 2;
01368                 for ( j = i+2; j < number; j += 2 ) t->perm[j] = j;
01369                 t->sgn = - t->sgn;
01370                 return(t->sgn);
01371             }
01372             i -= 2;
01373         }
01374     }
01375     return(0);
01376 }
01377
01378 /*
01379     #] TraceNno :
01380     #[ TraceN :          WORD TraceN(term,params,num,level)
01381 */
01382 int TraceN(PHEAD WORD *term, WORD *params, WORD num, WORD level)
01383 {
01384     GETBIDENTITY
01385     TRACES *t;
01386     WORD *p, *m, number, i;
01387     WORD *OldW;
01388     int ret;
01389     if ( params[3] != GAMMA1 ) {
01390         MLOCK(ErrorMessageLock);
01391         MesPrint("Gamma5 not allowed in n-trace");
01392         MUNLOCK(ErrorMessageLock);
01393     }

```

```

01395     SETERROR(-1)
01396 }
01397 OldW = AT.WorkPointer;
01398 if ( AN.numtracesctack >= AN.intracesctack ) {
01399     number = AN.intracesctack + 2;
01400     t = (TRACES *)Malloc1(number*sizeof(TRACES),"TRACES-struct");
01401     if ( AN.tracesctack ) {
01402         for ( i = 0; i < AN.intracesctack; i++ ) { t[i] = AN.tracesctack[i]; }
01403         M_free(AN.tracesctack,"TRACES-struct");
01404     }
01405     AN.tracesctack = t;
01406     AN.intracesctack = number;
01407 }
01408 number = *params - 6;
01409 if ( number < 0 || ( number & 1 ) || !params[5] ) return(0);
01410
01411 t = AN.tracesctack + AN.numtracesctack;
01412 AN.numtracesctack++;
01413
01414 t->inlist = AT.WorkPointer;
01415 t->accup = t->accu = t->inlist + number;
01416 t->perm = t->accu + number;
01417 if ( ( AT.WorkPointer + 3 * number ) >= AT.WorkTop ) {
01418     AN.numtracesctack--;
01419     MLOCK(ErrorMessageLock);
01420     MesWork();
01421     MUNLOCK(ErrorMessageLock);
01422     return(-1);
01423 }
01424 t->num = num;
01425 t->level = level;
01426 p = t->inlist;
01427 m = params+6;
01428 for ( i = 0; i < number; i++ ) *p++ = *m++;
01429 t->termp = term;
01430 t->factor = params[4];
01431 t->allsign = params[5];
01432 ret = TraceNgen(BHEAD t,number);
01433 AT.WorkPointer = OldW;
01434 AN.numtracesctack--;
01435 return(ret);
01436 }
01437
01438 /*
01439 #] TraceN :
01440 #[ TraceNgen :          WORD TraceNgen(t,number)
01441
01442 This routine is a simplified version of Trace4Gen. We know here
01443 only three cases: Adjacent objects, same objects and all different.
01444 The other difference lies of course in the struct which is now
01445 not of type TRACES, but of type TRACES.
01446
01447 */
01448
01449 int TraceNgen(PHEAD TRACES *t, WORD number)
01450 {
01451     GETBIDENTITY
01452     WORD *termout, *stop;
01453     WORD *p, *m, oldval;
01454     WORD *pold, *mold, diff, *oldstring;
01455 /*
01456 #] Special cases :
01457 */
01458 if ( number <= 2 ) { /* Special cases */
01459     termout = AT.WorkPointer;
01460     p = t->termp;
01461     stop = p + *p;
01462     m = termout;
01463     p++;
01464     if ( p < stop ) do {
01465         if ( *p == SUBEXPRESSION && p[2] == t->num ) {
01466             oldstring = p;
01467             p = t->termp;
01468             do { *m++ = *p++; } while ( p < oldstring );
01469             p += p[1];
01470             *m++ = AC.lUniTrace[0];
01471             *m++ = AC.lUniTrace[1];
01472             *m++ = AC.lUniTrace[2];
01473             *m++ = AC.lUniTrace[3];
01474             if ( number == 2 || t->accup > t->accu ) {
01475                 oldstring = m;
01476                 *m++ = DELTA;
01477                 *m++ = 4;
01478                 if ( number == 2 ) {
01479                     *m++ = t->inlist[0];
01480                     *m++ = t->inlist[1];
01481                 }

```

```

01482         if ( t->accup > t->accu ) {
01483             pold = p;
01484             p = t->accu;
01485             while ( p < t->accup ) *m++ = *p++;
01486             oldstring[1] = WORDDIF(m,oldstring);
01487             p = pold;
01488         }
01489     }
01490     if ( t->factor ) {
01491         *m++ = SNUMBER;
01492         *m++ = 4;
01493         *m++ = 2;
01494         *m++ = t->factor;
01495     }
01496     do { *m++ = *p++; } while ( p < stop );
01497     *termout = WORDDIF(m,termout);
01498     if ( t->allsign < 0 ) m[-1] = -m[-1];
01499     if ( ( AT.WorkPointer = m ) > AT.WorkTop ) {
01500         MLOCK(ErrorMessageLock);
01501         MesWork();
01502         MUNLOCK(ErrorMessageLock);
01503         return(-1);
01504     }
01505     if ( *termout ) {
01506         *AN.RepPoint = 1;
01507         AR.expchanged = 1;
01508         if ( Generator(BHEAD termout,t->level) ) goto TracCall;
01509     }
01510     AT.WorkPointer= termout;
01511     return(0);
01512 }
01513 p += p[1];
01514 } while ( p < stop );
01515 return(0);
01516 }
01517 /*
01518     #] Special cases :
01519     #[ Adjacent objects :
01520 */
01521 p = t->inlist;
01522 stop = p + number - 1;
01523 if ( *p == *stop ) {          /* First and last of string */
01524     oldval = *p;
01525     *(t->accup)++ = *p;
01526     *(t->accup)++ = *p;
01527     m = p+1;
01528     while ( m < stop ) *p++ = *m++;
01529     if ( TraceNgen(BHEAD t,number-2) ) goto TracCall;
01530     t = AN.tracestack + AN.numtracesctack - 1;
01531     while ( p > t->inlist ) *--m = *--p;
01532     *p = *stop = oldval;
01533     t->accup -= 2;
01534     return(0);
01535 }
01536 do {
01537     if ( *p == p[1] ) {        /* Adjacent in string */
01538         oldval = *p;
01539         pold = p;
01540         m = p+2;
01541         *(t->accup)++ = *p;
01542         *(t->accup)++ = *p;
01543         while ( m <= stop ) *p++ = *m++;
01544         if ( TraceNgen(BHEAD t,number-2) ) goto TracCall;
01545         t = AN.tracestack + AN.numtracesctack - 1;
01546         while ( p > pold ) *--m = *--p;
01547         *p++ = oldval;
01548         *p++ = oldval;
01549         t->accup -= 2;
01550         return(0);
01551     }
01552     p++;
01553 } while ( p < stop );
01554 /*
01555     #] Adjacent objects :
01556     #[ Same Objects :
01557 */
01558 p = t->inlist;
01559 stop = p + number - 1;
01560 diff = 2;
01561 do {
01562     p = t->inlist;
01563     while ( p <= stop ) {
01564         m = p + diff;
01565         if ( m > stop ) m -= number;
01566         if ( *p == *m ) {
01567             WORD oldfactor, c;
01568             oldstring = AT.WorkPointer;

```

```

01569         AT.WorkPointer += number;
01570         mold = m;
01571         oldval = *p;
01572         p = oldstring;
01573         m = t->inlist;
01574         while ( m <= stop ) *p++ = *m++;
01575     /*
01576         Rotate the string
01577     */
01578     {
01579         m = mold + 1;
01580         p = t->inlist;
01581         while ( m <= stop ) *p++ = *m++;
01582         m = oldstring;
01583         while ( p <= stop ) *p++ = *m++;
01584     }
01585     oldfactor = t->allsign;
01586     (t->factor)++;
01587     p -= diff + 1;
01588     m = stop;
01589     if ( oldval >= ( AM.OffsetIndex + WILDOFFSET ) ||
01590         ( oldval >= AM.OffsetIndex
01591           && indices[oldval-AM.OffsetIndex].dimension ) ) {
01592         m--;
01593     /*
01594         We distinguish 4 cases:
01595         m-p=1   Use g_(1,mu,a,mu) = (2-d_(mu,mu))*g_(1,a)
01596         m-p=2   Use g_(1,mu,a,b,mu) = 4*d_(a,b)+(d_(mu,mu)-4)*g_(1,a,b)
01597         m-p=3   Use g_(1,mu,a,b,c,mu) = -2*g_(1,c,b,a)
01598                 -(d_(mu,mu)-4)*g_(1,a,b,c)
01599         m-p>3   Reduce down to m-p=3 with the old technique
01600     */
01601         while ( m > (p+3) ) {
01602             c = *p;
01603             *p = *m;
01604             *m = c;
01605             if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01606             t = AN.tracestack + AN.numtracesctack - 1;
01607             m--;
01608             t->allsign = - t->allsign;
01609         }
01610         switch ( WORDDIF(m,p) ) {
01611             case 1:
01612                 c = *p;
01613                 *p = *m;
01614                 *m = c;
01615                 if ( oldval < ( AM.OffsetIndex + WILDOFFSET )
01616                     && indices[oldval-AM.OffsetIndex].nmin4
01617                     != -NMIN4SHIFT ) {
01618                     t->allsign = - t->allsign;
01619                     if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01620                     t = AN.tracestack + AN.numtracesctack - 1;
01621                     (t->factor)--;
01622                     * (t->accup)++ = SUMMEDIND;
01623                     * (t->accup)++ =
01624                         indices[oldval-AM.OffsetIndex].nmin4;
01625                 }
01626             else
01627             {
01628                 if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01629                 t = AN.tracestack + AN.numtracesctack - 1;
01630                 t->allsign = - t->allsign;
01631                 (t->factor)--;
01632                 * (t->accup)++ = oldval;
01633                 * (t->accup)++ = oldval;
01634             }
01635             if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01636             t = AN.tracestack + AN.numtracesctack - 1;
01637             t->accup -= 2;
01638             break;
01639             case 2:
01640                 { WORD one, two;
01641                     one = *p = p[1];
01642                     two = p[1] = *m;
01643                     (t->factor)++;
01644                     * (t->accup)++ = *p;
01645                     * (t->accup)++ = *m;
01646                     if ( TraceNgen(BHEAD t,number-4) ) goto TracnCall;
01647                     t = AN.tracestack + AN.numtracesctack - 1;
01648                     *p = one; p[1] = two;
01649                     t->accup -= 2;
01650                     if ( oldval < ( AM.OffsetIndex + WILDOFFSET )
01651                         && indices[oldval-AM.OffsetIndex].nmin4
01652                         != -NMIN4SHIFT ) {
01653                         t->factor -= 2;
01654                         * (t->accup)++ = SUMMEDIND;
01655                         * (t->accup)++ =

```

```

01656             indices[oldval-AM.OffsetIndex].nmin4;
01657         }
01658         else {
01659             t->allsign = - t->allsign;
01660             if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01661             t = AN.tracestack + AN.numtracesctack - 1;
01662             t->allsign = - t->allsign;
01663             t->factor -= 2;
01664             * (t->accup)++ = oldval;
01665             * (t->accup)++ = oldval;
01666         }
01667         if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01668         t = AN.tracestack + AN.numtracesctack - 1;
01669         t->accup -= 2;
01670     }
01671     break;
01672 default:
01673     c = *p;
01674     *p = *m;
01675     *m = c;
01676     c = m[-1]; m[-1] = m[-2]; m[-2] = c;
01677     t->allsign = - t->allsign;
01678     if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01679     t = AN.tracestack + AN.numtracesctack - 1;
01680     m--;
01681     c = *p;
01682     *p = *m;
01683     *m = c;
01684     (t->factor)--;
01685     if ( oldval < ( AM.OffsetIndex + WILDOFFSET )
01686         && indices[oldval-AM.OffsetIndex].nmin4
01687         != -NMN4SHIFT ) {
01688         * (t->accup)++ = SUMMEDIND;
01689         * (t->accup)++ =
01690             indices[oldval-AM.OffsetIndex].nmin4;
01691         if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01692         t = AN.tracestack + AN.numtracesctack - 1;
01693         t->accup -= 2;
01694         t->allsign = - t->allsign;
01695     }
01696     else
01697     {
01698         * (t->accup)++ = oldval;
01699         * (t->accup)++ = oldval;
01700         if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01701         t = AN.tracestack + AN.numtracesctack - 1;
01702         t->accup -= 2;
01703         t->allsign = - t->allsign;
01704         t->factor += 2;
01705         if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01706         t = AN.tracestack + AN.numtracesctack - 1;
01707         t->factor -= 2;
01708     }
01709     break;
01710 }
01711 }
01712 else {
01713     * (t->accup) = oldval;
01714     t->accup += 2;
01715     m--;
01716     while ( m > p ) {
01717         c = t->accup[-1];
01718         t->accup[-1] = *m;
01719         *m = c;
01720         if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01721         t = AN.tracestack + AN.numtracesctack - 1;
01722         m--;
01723         t->allsign = - t->allsign;
01724     }
01725     c = t->accup[-1];
01726     t->accup[-1] = *m;
01727     *m = c;
01728     (t->factor)--;
01729     if ( TraceNgen(BHEAD t,number-2) ) goto TracnCall;
01730     t = AN.tracestack + AN.numtracesctack - 1;
01731     t->accup -= 2;
01732 }
01733 t->allsign = oldfactor;
01734 p = oldstring;
01735 m = t->inlist;
01736 while ( m <= stop ) *m++ = *p++;
01737 AT.WorkPointer = oldstring;
01738 return(0);
01739 }
01740 p++;
01741 }
01742 diff++;

```

```

01743     } while ( diff <= (number>>1) );
01744 /*
01745     #] Same Objects :
01746     #[ All Different :
01747
01748     Here we have a string with all different objects.
01749
01750 */
01751     t->sgn = 0;
01752     termout = AT.WorkPointer;
01753     while ( ( diff = TraceNno(number,t->accup,t) ) != 0 ) {
01754         p = t->termp;
01755         stop = p + *p;
01756         m = termout;
01757         p++;
01758         if ( p < stop ) do {
01759             if ( *p == SUBEXPRESSION && p[2] == t->num ) {
01760                 oldstring = p;
01761                 p = t->termp;
01762                 do { *m++ = *p++; } while ( p < oldstring );
01763                 p += p[1];
01764                 pold = p;
01765                 *m++ = AC.lUniTrace[0];
01766                 *m++ = AC.lUniTrace[1];
01767                 *m++ = AC.lUniTrace[2];
01768                 *m++ = AC.lUniTrace[3];
01769                 *m++ = SNUMBER;
01770                 *m++ = 4;
01771                 *m++ = 2;
01772                 *m++ = t->factor;
01773                 p = t->accup;
01774                 oldval = number;
01775                 oldstring = m;
01776                 *m++ = DELTA;
01777                 *m++ = oldval + 2;
01778                 NCOPY(m,p,oldval);
01779                 if ( t->accup > t->accu ) {
01780                     p = t->accu;
01781                     while ( p < t->accup ) *m++ = *p++;
01782                     oldstring[1] = WORDDIF(m,oldstring);
01783                 }
01784                 p = pold;
01785                 do { *m++ = *p++; } while ( p < stop );
01786                 *termout = WORDDIF(m,termout);
01787                 if ( ( diff ^ t->allsign ) < 0 ) m[-1] = - m[-1];
01788                 if ( ( AT.WorkPointer = m ) > AT.WorkTop ) {
01789                     MLOCK(ErrorMessageLock);
01790                     MesWork();
01791                     MUNLOCK(ErrorMessageLock);
01792                     return(-1);
01793                 }
01794                 if ( *termout ) {
01795                     *AN.RepPoint = 1;
01796                     AR.expchanged = 1;
01797                     if ( Generator(BHEAD termout,t->level) ) {
01798                         AT.WorkPointer = termout;
01799                         goto TracCall;
01800                     }
01801                     t = AN.tracestack + AN.numtracesctack - 1;
01802                 }
01803                 break;
01804             }
01805             p += p[1];
01806         } while ( p < stop );
01807     }
01808     AT.WorkPointer = termout;
01809     return(0);
01810
01811 /*
01812     #] All Different :
01813 */
01814 TracnCall:
01815     AT.WorkPointer = oldstring;
01816 TracCall:
01817     if ( AM.tracebackflag ) {
01818         MLOCK(ErrorMessageLock);
01819         MesCall("TraceNgen");
01820         MUNLOCK(ErrorMessageLock);
01821     }
01822     return(-1);
01823 }
01824
01825 /*
01826     #] TraceNgen :
01827     #[ Traces :                WORD Traces(term,params,num,level)
01828
01829     The contents of the AT.TMout array are:

```

```

01830         length,type,subtype,gamma5,factor,sign,gamma's
01831
01832 */
01833
01834 int Traces(PHEAD WORD *term, WORD *params, WORD num, WORD level)
01835 {
01836     GETBIDENTITY
01837     switch ( AT.TMout[2] ) {      /* Subtype gives dimension */
01838     case 0:
01839         return(TraceN(BHEAD term,params,num,level));
01840     case 4:
01841         return(Trace4(BHEAD term,params,num,level));
01842     case 12:
01843         return(Trace4(BHEAD term,params,num,level));
01844     case 20:
01845         return(Trace4(BHEAD term,params,num,level));
01846     default:
01847         return(0);
01848     }
01849 }
01850
01851 /*
01852     #] Traces :
01853     #[ TraceFind :          WORD TraceFind(term,params)
01854 */
01855
01856 int TraceFind(PHEAD WORD *term, WORD *params)
01857 {
01858     GETBIDENTITY
01859     WORD *p, *m, *to;
01860     WORD *termout, *stop, *stop2, number = 0;
01861     WORD first = 1;
01862     WORD type, spinline, sp;
01863     type = params[3];
01864     spinline = params[4];
01865     if ( spinline < 0 ) {      /* $ variable. Evaluate */
01866         sp = DolToIndex(BHEAD -spinline);
01867         if ( AN.ErrorInDollar || sp < 0 ) {
01868             MLOCK(ErrorMessageLock);
01869             MesPrint("%s does not have an index value in trace statement in module %1",
01870                     DOLLARNAME(Dollars,-spinline),AC.CModule);
01871             MUNLOCK(ErrorMessageLock);
01872             return(0);
01873         }
01874         spinline = sp;
01875     }
01876     to = AT.TMout;
01877     to++;
01878     *to++ = TAKETRACE;
01879     *to++ = type;
01880     *to++ = GAMMA1;
01881     *to++ = 0;          /* Powers of two */
01882     *to++ = 1;          /* sign */
01883     p = term;
01884     m = p + *p - 1;
01885     stop = m - ABS(*m);
01886     termout = m = AT.WorkPointer;
01887     m++;
01888     p++;
01889     while ( p < stop ) {
01890         stop2 = p + p[1];
01891         if ( *p == GAMMA && p[FUNHEAD] == spinline ) {
01892             if ( first ) {
01893                 *m++ = SUBEXPRESSION;
01894                 *m++ = SUBEXPSIZE;
01895                 *m++ = -1;
01896                 *m++ = 1;
01897                 *m++ = DUMMYBUFFER;
01898                 FILLSUB(m)
01899                 first = 0;
01900             }
01901             p += FUNHEAD+1;
01902             while ( p < stop2 ) {
01903                 if ( *p == GAMMA5 ) {
01904                     if ( AT.TMout[3] == GAMMA5 ) AT.TMout[3] = GAMMA1;
01905                     else if ( AT.TMout[3] == GAMMA1 ) AT.TMout[3] = GAMMA5;
01906                     else if ( AT.TMout[3] == GAMMA7 ) AT.TMout[5] = -AT.TMout[5];
01907                     if ( number & 1 ) AT.TMout[5] = - AT.TMout[5];
01908                     p++;
01909                 }
01910                 else if ( *p == GAMMA6 ) {
01911                     if ( number & 1 ) goto F7;
01912 F6:         if ( AT.TMout[3] == GAMMA6 ) (AT.TMout[4])++;
01913                     else if ( AT.TMout[3] == GAMMA1 ) AT.TMout[3] = GAMMA6;
01914                     else if ( AT.TMout[3] == GAMMA5 ) AT.TMout[3] = GAMMA6;
01915                     else if ( AT.TMout[3] == GAMMA7 ) AT.TMout[5] = 0;
01916                     p++;

```



```

01917         }
01918         else if ( *p == GAMMA7 ) {
01919             if ( number & 1 ) goto F6;
01920 F7:         if ( AT.TMout[3] == GAMMA7 ) (AT.TMout[4])++;
01921             else if ( AT.TMout[3] == GAMMA1 ) AT.TMout[3] = GAMMA7;
01922             else if ( AT.TMout[3] == GAMMA5 ) {
01923                 AT.TMout[3] = GAMMA7;
01924                 AT.TMout[5] = -AT.TMout[5];
01925             }
01926             else if ( AT.TMout[3] == GAMMA6 ) AT.TMout[5] = 0;
01927             p++;
01928         }
01929         else {
01930             *to++ = *p++;
01931             number++;
01932         }
01933     }
01934 }
01935 else {
01936     while ( p < stop2 ) *m++ = *p++;
01937 }
01938 }
01939 if ( first ) return(0);
01940 AT.TMout[0] = WORDDIF(to,AT.TMout);
01941 to = term;
01942 to += *to;
01943 while ( p < to ) *m++ = *p++;
01944 *termout = WORDDIF(m,termout);
01945 to = term;
01946 p = termout;
01947 do { *to++ = *p++; } while ( p < m );
01948 AT.WorkPointer = term + *term;
01949 return(1);
01950 }
01951
01952 /*
01953     #] TraceFind :
01954     #[ Chisholm :          WORD Chisholm(term,level,num)
01955
01956     Routines for reorganizing traces.
01957     The command
01958         Chisholm,1;
01959     will collect the gamma matrices in spinline 1 and see whether
01960     they have an index in common with another gamma matrix. If this
01961     is the case the identity
01962         g_(2,mu)*Tr[g_(1,mu)*S(2)] = S(2)+SR(2)
01963     is applied (SR is the reversed string).
01964 */
01965
01966 int Chisholm(PHEAD WORD *term, WORD level)
01967 {
01968     GETBIDENTITY
01969     WORD *t, *r, *m, *s, *tt, *rr;
01970     WORD *mat, *matpoint, *termout, *rdo;
01971     CBUF *C = cbuf+AM.rbufnum;
01972     WORD i, j, num = C->lhs[level][2], gam5;
01973     WORD norm = 0, k, *matp;
01974 /*
01975     #[ Find : Find possible matrices
01976 */
01977     mat = matpoint = AT.WorkPointer;
01978     t = term;
01979     r = t + *t - 1; r -= ABS(*r);
01980     t++;
01981     i = 0;
01982     gam5 = GAMMA1;
01983     while ( t < r ) {
01984         if ( *t == GAMMA && t[FUNHEAD] == num ) {
01985             m = t + t[1];
01986             t += FUNHEAD+1;
01987             while ( t < m ) {
01988                 if ( *t >= 0 || *t < MINSPEC ) i++;
01989                 else {
01990                     if ( gam5 == GAMMA1 ) gam5 = *t;
01991                     else if ( gam5 == GAMMA5 ) {
01992                         if ( *t == GAMMA5 ) gam5 = GAMMA1;
01993                         else if ( *t != GAMMA1 ) gam5 = *t;
01994                     }
01995                 }
01996                 *matpoint++ = *t++;
01997             }
01998         }
01999         else t += t[1];
02000     }
02001     if ( ( i & 1 ) != 0 ) return(0); /* odd trace */
02002 /*
02003     #] Find :

```

```

02004      #[ Test : Test for contracted index
02005
02006      This code should be modified.
02007
02008      We have to check for all possible matches if C->lhs[level][3] == 1
02009      and the trace contains a gamma5, gamma6 or gamma7.
02010      Then we normalize by the number of possible contractions (norm) and
02011      do all of them. This way the Levi-Civita tensors have a maximum
02012      chance of cancelling each other. This option is activated with
02013      'contract' and 'symmetrize'. Defaults are that they are on, but
02014      they can be switched off with nocontract and nosymmetrize.
02015  */
02016      s = mat;
02017      while ( s < matpoint ) {
02018  /*
02019          if ( *s < AM.OffsetIndex || ( *s < ( AM.OffsetIndex + WILDOFFSET ) &&
02020              indices[*s-AM.OffsetIndex].dimension == 0 ) ) {
02021  */
02022              if ( *s < AM.OffsetIndex || ( *s < ( AM.OffsetIndex + WILDOFFSET ) &&
02023                  indices[*s-AM.OffsetIndex].dimension != 4 )
02024                  || ( ( AC.lDefDim != 4 ) && ( *s >= ( AM.OffsetIndex + WILDOFFSET ) ) ) ) {
02025                  s++; continue;
02026              }
02027              t = term+1;
02028              while ( t < r ) {
02029                  if ( *t == GAMMA && t[FUNHEAD] != num ) {
02030                      m = t + t[1];
02031                      t += FUNHEAD+1;
02032                      while ( t < m ) {
02033                          if ( *t == *s ) {
02034                              norm++;
02035                          }
02036                          t++;
02037                      }
02038                      else t += t[1];
02039                  }
02040                  s++;
02041              }
02042          }
02043          if ( norm == 0 ) return(Generator(BHEAD term,level)); /* No Action */
02044  */
02045      #[ Test :
02046      #[ Do : Process the string
02047
02048      tt: The subterm
02049      t: The matrix
02050      s: The matrix in the relevant string
02051
02052      Cycle the string in mat so that s is at the end.
02053      Copy the part till the critical GAMMA.
02054      Copy inside the critical string, copy S, copy tail inside string.
02055      Important to remember where S is so that we can reverse it later.
02056      Add term UnitTrace/2/norm.
02057      Copy rest of term.
02058      Continue execution with S.
02059      Reverse S.
02060      Continue execution with SR.
02061  */
02062
02063      if ( C->lhs[level][3] == 0 /* || gam5 == GAMMA1 */ ) norm = 1;
02064
02065      matp = matpoint;
02066      for ( k = 0; k < norm; k++ ) {
02067          matpoint = matp;
02068          s = mat;
02069          while ( s < matpoint ) {
02070  /*
02071              if ( *s < AM.OffsetIndex || ( *s < ( AM.OffsetIndex + WILDOFFSET ) &&
02072                  indices[*s-AM.OffsetIndex].dimension == 0 ) ) {
02073  */
02074                  if ( *s < AM.OffsetIndex || ( *s < ( AM.OffsetIndex + WILDOFFSET ) &&
02075                      indices[*s-AM.OffsetIndex].dimension != 4 ) ) {
02076                      s++; continue;
02077                  }
02078                  t = term+1;
02079                  while ( t < r ) {
02080                      if ( *t == GAMMA && t[FUNHEAD] != num ) {
02081                          tt = t;
02082                          m = t + t[1];
02083                          t += FUNHEAD+1;
02084                          while ( t < m ) {
02085                              if ( *t == *s ) {
02086                                  i = WORDDIF(t,tt);
02087                                  m = mat;
02088                                  while ( m <= s ) *matpoint++ = *m++;
02089                                  t = mat;
02090                                  while ( m < matpoint ) *t++ = *m++;

```

```

02091         termout = t;
02092         m = termout + 1;
02093         t = term + 1;
02094         while ( t < tt ) {
02095             if ( *t != GAMMA || t[FUNHEAD] != num ) {
02096                 j = t[1];
02097                 NCOPY(m,t,j);
02098             }
02099             else t += t[1];
02100         }
02101
02102         tt += tt[1];
02103         rdo = m;
02104         j = i;
02105         while ( --j >= 0 ) *m++ = *t++;
02106         matpoint = m;
02107         s = mat;
02108         while ( s < termout ) *m++ = *s++;
02109         m--;
02110         t++;
02111         while ( t < tt ) *m++ = *t++;
02112         rdo[1] = WORDDIF(m,rdo);
02113
02114         *m++ = AC.lUniTrace[0];
02115         *m++ = AC.lUniTrace[1];
02116         *m++ = AC.lUniTrace[2];
02117         *m++ = AC.lUniTrace[3];
02118         *m++ = SNUMBER;
02119         *m++ = 4;
02120         *m++ = 2*norm;
02121         *m++ = -1;
02122
02123         while ( t < r ) {
02124             if ( *t != GAMMA || t[FUNHEAD] != num ) {
02125                 j = t[1];
02126                 NCOPY(m,t,j);
02127             }
02128             else t += t[1];
02129         }
02130         rr = term + *term;
02131         while ( t < rr ) *m++ = *t++;
02132
02133         *termout = WORDDIF(m,termout);
02134         rr = m;
02135         t = termout;
02136         j = *termout;
02137         NCOPY(m,t,j);
02138         AT.WorkPointer = m;
02139         if ( Generator(BHEAD t,level) ) goto ChisCall;
02140
02141         j = WORDDIF(termout,mat)-1;
02142         t = matpoint;
02143         m = t + j;
02144         AT.WorkPointer = rr;
02145         while ( m > t ) {
02146             i = *--m; *m = *t; *t++ = i;
02147         }
02148
02149         if ( Generator(BHEAD termout,level) ) goto ChisCall;
02150         AT.WorkPointer = mat;
02151
02152         goto NextK;
02153     }
02154     t++;
02155 }
02156 }
02157     else t += t[1];
02158 }
02159     s++;
02160 }
02161 NextK:;
02162 }
02163     return(0);
02164 /*
02165 #] Do :
02166 */
02167 ChisCall:
02168     if ( AM.tracebackflag ) {
02169         MLOCK(ErrorMessageLock);
02170         MesCall("Chisholm");
02171         MUNLOCK(ErrorMessageLock);
02172     }
02173     return(-1);
02174 }
02175
02176 /*
02177 #] Chisholm :

```

```

02178      #! TenVecFind :          WORD TenVecFind(term,params)
02179      */
02180
02181      int TenVecFind(PHEAD WORD *term, WORD *params)
02182      {
02183          GETBIDENTITY
02184          WORD *t, *w, *m, *tstop;
02185          WORD i, mode, thevector, thetensor, spectator;
02186          thetensor = params[3];
02187          thevector = params[4];
02188          mode = params[5];
02189          if ( thetensor < 0 ) { /* $-expression */
02190              thetensor = DolToTensor(BHEAD -thetensor);
02191              if ( thetensor < FUNCTION ) {
02192                  if ( thevector > 0 ) {
02193                      thetensor = DolToTensor(BHEAD thevector);
02194                      if ( thetensor < FUNCTION ) {
02195                          MLOCK(ErrorMessageLock);
02196                          MesPrint("$%s should have been a tensor in module %1"
02197                              ,DOLLARNAME(Dollars,params[4]),AC.CModule);
02198                          MUNLOCK(ErrorMessageLock);
02199                          return(-1);
02200                      }
02201                      thevector = DolToVector(BHEAD -params[3]);
02202                      if ( thevector >= 0 ) {
02203                          MLOCK(ErrorMessageLock);
02204                          MesPrint("$%s should have been a vector in module %1"
02205                              ,DOLLARNAME(Dollars,-params[3]),AC.CModule);
02206                          MUNLOCK(ErrorMessageLock);
02207                          return(-1);
02208                      }
02209                  }
02210                  else {
02211                      MLOCK(ErrorMessageLock);
02212                      MesPrint("$%s should have been a tensor in module %1"
02213                          ,DOLLARNAME(Dollars,-params[3]),AC.CModule);
02214                      MUNLOCK(ErrorMessageLock);
02215                      return(-1);
02216                  }
02217              }
02218          }
02219          if ( thevector > 0 ) { /* $-expression */
02220              thevector = DolToVector(BHEAD thevector);
02221              if ( thevector >= 0 ) {
02222                  MLOCK(ErrorMessageLock);
02223                  MesPrint("$%s should have been a vector in module %1"
02224                      ,DOLLARNAME(Dollars,params[4]),AC.CModule);
02225                  MUNLOCK(ErrorMessageLock);
02226                  return(-1);
02227              }
02228          }
02229          if ( ( mode & 1 ) != 0 ) { /* Vector to tensor */
02230              GETSTOP(term,tstop);
02231              t = term + 1;
02232              while ( t < tstop ) {
02233                  if ( *t == DOTPRODUCT ) {
02234                      i = t[1] - 2; t += 2;
02235                      while ( i > 0 ) {
02236                          spectator = 0;
02237                          if ( t[2] < 0 ) {}
02238                          else if ( *t == thevector && t[1] == thevector ) {
02239                              if ( ( mode & 2 ) == 0 ) spectator = thevector;
02240                          }
02241                          else if ( *t == thevector ) spectator = t[1];
02242                          else if ( t[1] == thevector ) spectator = *t;
02243                          if ( spectator ) {
02244                              if ( ( mode & 8 ) == 0 ) goto match;
02245                              w = SetElements + Sets[params[6]].first;
02246                              m = SetElements + Sets[params[6]].last;
02247                              while ( w < m ) {
02248                                  if ( *w == spectator ) break;
02249                                  w++;
02250                              }
02251                              if ( w >= m ) goto match;
02252                          }
02253                          t += 3;
02254                          i -= 3;
02255                      }
02256                  }
02257                  else if ( *t == VECTOR ) {
02258                      i = t[1] - 2; t += 2;
02259                      while ( i > 0 ) {
02260                          if ( *t == thevector ) goto match;
02261                          t += 2;
02262                          i -= 2;
02263                      }
02264                  }

```

```

02265         else if ( *t == thetensor ) t += t[1];
02266     else if ( *t >= FUNCTION ) {
02267         if ( functions[*t-FUNCTION].spec > 0 ) {
02268             w = t + t[1];
02269             t += FUNHEAD;
02270             while ( t < w ) {
02271                 if ( *t == thevector ) goto match;
02272                 t++;
02273             }
02274         }
02275         else if ( ( mode & 4 ) != 0 ) {
02276             w = t + t[1];
02277             t += FUNHEAD;
02278             while ( t < w ) {
02279                 if ( *t == -VECTOR && t[1] == thevector ) goto match;
02280                 else if ( *t > 0 ) t += *t;
02281                 else if ( *t <= -FUNCTION ) t++;
02282                 else t += 2;
02283             }
02284         }
02285         else t += t[1];
02286     }
02287     else t += t[1];
02288 }
02289 }
02290 else { /* Tensor to Vector */
02291     GETSTOP(term,tstop);
02292     t = term+1;
02293     while ( t < tstop ) {
02294         if ( *t == thetensor ) goto match;
02295         t += t[1];
02296     }
02297 }
02298 return(0);
02299 match:
02300     AT.TMout[0] = 5;
02301     AT.TMout[1] = TENVEC;
02302     AT.TMout[2] = thetensor;
02303     AT.TMout[3] = thevector;
02304     AT.TMout[4] = mode;
02305     if ( ( mode & 8 ) != 0 ) { AT.TMout[0] = 6; AT.TMout[5] = params[6]; }
02306     return(1);
02307 }
02308 }
02309
02310 /*
02311     #] TenVecFind :
02312     #[ TenVec :          WORD TenVec(term,params,num,level)
02313 */
02314
02315 int TenVec(PHEAD WORD *term, WORD *params, WORD num, WORD level)
02316 {
02317     GETBIDENTITY
02318     WORD *t, *m, *w, *termout, *tstop, *outlist, *ou, *ww, *mm;
02319     WORD i, j, k, x, mode, thevector, thetensor, DumNow, spectator;
02320     DUMMYUSE(num);
02321     thetensor = params[2];
02322     thevector = params[3];
02323     mode = params[4];
02324     termout = AT.WorkPointer;
02325     DumNow = AR.CurDum = DetCurDum(BHEAD term);
02326     if ( ( mode & 1 ) != 0 ) { /* Vector to tensor */
02327         AT.WorkPointer += *term;
02328         ou = outlist = AT.WorkPointer;
02329         GETSTOP(term,tstop);
02330         t = term + 1;
02331         m = termout + 1;
02332         while ( t < tstop ) {
02333             if ( *t == DOTPRODUCT ) {
02334                 i = t[1] - 2;
02335                 w = m;
02336                 *m++ = *t++; *m++ = *t++;
02337                 while ( i > 0 ) {
02338                     spectator = 0;
02339                     if ( t[2] < 0 ) {
02340                         *m++ = *t++; *m++ = *t++; *m++ = *t++;
02341                     }
02342                     else if ( *t == thevector && t[1] == thevector ) {
02343                         if ( ( mode & 2 ) == 0 ) spectator = thevector;
02344                         else {
02345                             *m++ = *t++; *m++ = *t++; *m++ = *t++;
02346                         }
02347                     }
02348                     else if ( *t == thevector ) spectator = t[1];
02349                     else if ( t[1] == thevector ) spectator = *t;
02350                     else {
02351                         *m++ = *t++; *m++ = *t++; *m++ = *t++;

```

```

02352     }
02353     if ( spectator ) {
02354         if ( ( mode & 8 ) == 0 ) goto noveto;
02355         ww = SetElements + Sets[params[5]].first;
02356         mm = SetElements + Sets[params[5]].last;
02357         while ( ww < mm ) {
02358             if ( *ww == spectator ) break;
02359             ww++;
02360         }
02361         if ( ww < mm ) {
02362             *m++ = *t++; *m++ = *t++; *m++ = *t++;
02363         }
02364         else {
02365 noveto:
02366             if ( spectator == thevector ) {
02367                 for ( j = 0; j < t[2]; j++ ) {
02368                     *ou++ = ++AR.CurDum;
02369                     *ou++ = AR.CurDum;
02370                 }
02371                 t += 3;
02372             }
02373             else {
02374                 for ( j = 0; j < t[2]; j++ ) *ou++ = spectator;
02375                 t += 3;
02376             }
02377             i -= 3;
02378         }
02379         w[1] = WORDDIF(m,w);
02380         if ( w[1] == 2 ) m = w;
02381     }
02382     else if ( *t == VECTOR ) {
02383         i = t[1] - 2; w = m;
02384         *m++ = *t++; *m++ = *t++;
02385         while ( i > 0 ) {
02386             if ( *t == thevector ) {
02387                 *ou++ = t[1];
02388                 t += 2;
02389             }
02390             else { *m++ = *t++; *m++ = *t++; }
02391             i -= 2;
02392         }
02393         w[1] = WORDDIF(m,w);
02394         if ( w[1] == 2 ) m = w;
02395     }
02396     else if ( *t == thetensor ) {
02397         i = t[1] - FUNHEAD;
02398         t += FUNHEAD;
02399         NCOPY(ou,t,i);
02400     }
02401     else if ( *t >= FUNCTION ) {
02402         if ( functions[*t-FUNCTION].spec > 0 ) {
02403             w = t + t[1];
02404             i = FUNHEAD;
02405             NCOPY(m,t,i);
02406             while ( t < w ) {
02407                 if ( *t == thevector ) {
02408                     *m++ = ++AR.CurDum;
02409                     *ou++ = AR.CurDum;
02410                     t++;
02411                 }
02412                 else *m++ = *t++;
02413             }
02414         }
02415         else if ( ( mode & 4 ) != 0 ) {
02416             w = t + t[1];
02417             i = FUNHEAD;
02418             NCOPY(m,t,i);
02419             while ( t < w ) {
02420                 if ( *t == -VECTOR && t[1] == thevector ) {
02421                     *m++ = -INDEX;
02422                     *m++ = ++AR.CurDum;
02423                     *ou++ = AR.CurDum;
02424                     t += 2;
02425                 }
02426                 else if ( *t > 0 ) {
02427                     i = *t;
02428                     NCOPY(m,t,i);
02429                 }
02430                 else if ( *t <= -FUNCTION ) *m++ = *t++;
02431                 else { *m++ = *t++; *m++ = *t++; }
02432             }
02433         }
02434         else goto docopy;
02435     }
02436     else {
02437 docopy:
02438         i = t[1];

```

```

02439         NCOPY(m,t,i);
02440     }
02441 }
02442 i = WORDDIF(ou,outlist);
02443 if ( i > 0 ) {
02444     for ( j = 1; j < i; j++ ) {
02445         if ( outlist[j-1] > outlist[j] ) {
02446             x = outlist[j-1]; outlist[j-1] = outlist[j]; outlist[j] = x;
02447             for ( k = j-1; k > 0; k-- ) {
02448                 if ( outlist[k-1] <= outlist[k] ) break;
02449                 x = outlist[k-1]; outlist[k-1] = outlist[k]; outlist[k] = x;
02450             }
02451         }
02452     }
02453
02454     *m++ = thetensor;
02455     *m++ = FUNHEAD + i;
02456     *m++ = DIRTYSYMFLAG;
02457     FILLFUN3(m)
02458     ou = outlist;
02459     NCOPY(m,ou,i);
02460 }
02461 w = term + *term;
02462 while ( t < w ) *m++ = *t++;
02463 }
02464 else { /* Tensor to Vector */
02465     GETSTOP(term,tstop);
02466     t = term+1;
02467     m = termout+1;
02468     while ( t < tstop ) {
02469         if ( *t != thetensor ) {
02470             i = t[1];
02471             NCOPY(m,t,i);
02472         }
02473         else {
02474             i = t[1] - FUNHEAD;
02475             t += FUNHEAD;
02476             if ( i > 0 ) {
02477                 w = m; m += 2;
02478                 while ( --i >= 0 ) {
02479                     *m++ = thevector;
02480                     *m++ = *t++;
02481                 }
02482                 *w = DELTA;
02483                 w[1] = WORDDIF(m,w);
02484             }
02485         }
02486     }
02487     w = term + *term;
02488     while ( t < w ) *m++ = *t++;
02489 }
02490 *termout = WORDDIF(m,termout);
02491 AT.WorkPointer = m;
02492 *AT.TMout = 0;
02493 if ( Generator(BHEAD termout,level) ) goto fromTenVec;
02494 AR.CurDum = DumNow;
02495 AT.WorkPointer = termout;
02496 return(0);
02497 fromTenVec:
02498 if ( AM.tracebackflag ) {
02499     MLOCK(ErrorMessageLock);
02500     MesCall("TenVec");
02501     MUNLOCK(ErrorMessageLock);
02502 }
02503 return(-1);
02504 }
02505
02506 /*
02507     #] TenVec :
02508     #] Operations :
02509 */

```

4.95 optimize.cc File Reference


```

#include <vector>
#include <stack>
#include <algorithm>
#include <set>
#include <map>

```

```
#include <climits>
#include <cmath>
#include <string>
#include <iostream>
#include <tr1/unordered_map>
#include <tr1/unordered_set>
#include "form3.h"
#include "mytime.h"
```

Include dependency graph for optimize.cc:



Data Structures

- class [tree_node](#)
- struct [CSEHash](#)
- struct [CSEEq](#)
- struct [node](#)
- struct [NodeHash](#)
- struct [NodeEq](#)
- class [optimization](#)

Typedefs

- typedef struct [node](#) **NODE**

Functions

- void [print_instr](#) (const vector< WORD > &instr, WORD num)
- template<class RandomAccessIterator >
void [my_random_shuffle](#) (PHEAD RandomAccessIterator fr, RandomAccessIterator to)
- LONG [get_expression](#) (int exprnr)
- vector< vector< WORD > > [get_brackets](#) ()
- int [count_operators](#) (const WORD *expr, bool print=false)
- int [count_operators](#) (const vector< WORD > &instr, bool print=false)
- vector< WORD > [occurrence_order](#) (const WORD *expr, bool rev)
- WORD [getpower](#) (const WORD *term, int var, int pos)
- void [fixarg](#) (UWORD *t, WORD &n)
- void [GcdLong_fix_args](#) (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- void [DivLong_fix_args](#) (UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc, UWORD *d, WORD *nd)
- void [build_Horner_tree](#) (const WORD **terms, int numterms, int var, int maxvar, int pos, vector< WORD > *res)
- bool [term_compare](#) (const WORD *a, const WORD *b)
- vector< WORD > [Horner_tree](#) (const WORD *expr, const vector< WORD > &order)
- void [print_tree](#) (const vector< WORD > &tree)
- template<typename T >
size_t [hash_range](#) (T *array, int size)

- `vector< WORD > generate_instructions` (const `vector< WORD > &tree`, bool `do_CSE`)
- int `count_operators_cse` (const `vector< WORD > &tree`)
- `NODE * buildTree` (`vector< WORD > &tree`)
- int `count_operators_cse_topdown` (`vector< WORD > &tree`)
- `vector< WORD > simulated_annealing` ()
- void `find_Horner_MCTS_expand_tree` ()
- void `find_Horner_MCTS` ()
- `vector< WORD > merge_operators` (const `vector< WORD > &all_instr`, bool `move_coeff`)
- `vector< optimization > find_optimizations` (const `vector< WORD > &instr`)
- bool `do_optimization` (const `optimization` `optim`, `vector< WORD > &instr`, int `newid`)
- int `partial_factorize` (`vector< WORD > &instr`, int `n`, int `improve`)
- `vector< WORD > optimize_greedy` (`vector< WORD > instr`, LONG `time_limit`)
- `vector< WORD > recycle_variables` (const `vector< WORD > &all_instr`)
- void `optimize_expression_given_Horner` ()
- void `generate_output` (const `vector< WORD > &instr`, int `exprnr`, int `extraoffset`, const `vector< vector< WORD > > &brackets`)
- `WORD generate_expression` (`WORD exprnr`)
- void `optimize_print_code` (int `print_expr`)
- int `Optimize` (`WORD exprnr`, int `do_print`)
- int `ClearOptimize` ()

Variables

- const `WORD OPER_ADD` = -1
- const `WORD OPER_MUL` = -2
- const `WORD OPER_COMMA` = -3
- `WORD * optimize_expr`
- `vector< vector< WORD > > optimize_best_Horner_schemes`
- int `optimize_num_vars`
- int `optimize_best_num_oper`
- `vector< WORD > optimize_best_instr`
- `vector< WORD > optimize_best_vars`
- bool `mcts_factorized`
- bool `mcts_separated`
- `vector< WORD > mcts_vars`
- `tree_node mcts_root`
- int `mcts_expr_score`
- `set< pair< int, vector< WORD > > > mcts_best_schemes`

4.95.1 Detailed Description

experimental routines for the optimization of FORTRAN or C output.

Definition in file [optimize.cc](#).

4.95.2 Function Documentation

4.95.2.1 print_instr()

```
void print_instr (
    const vector< WORD > & instr,
    WORD num )
```

Definition at line 179 of file [optimize.cc](#).

4.95.2.2 my_random_shuffle()

```
template<class RandomAccessIterator >
void my_random_shuffle (
    PHEAD RandomAccessIterator fr,
    RandomAccessIterator to )
```

Random shuffle

4.95.3 Description

Randomly permutes elements in the range [fr,to). Functionality is the same as C++'s "random_shuffle", but it uses Form's "wranf".

Definition at line 201 of file [optimize.cc](#).

Referenced by [find_Horner_MCTS\(\)](#).

4.95.3.1 get_expression()

```
LONG get_expression (
    int exprnr )
```

Get expression

4.95.4 Description

Reads an expression from the input file into a buffer (called optimize_expr). This buffer is used during the optimization process. Non-symbols are removed by ConvertToPoly and are put in temporary symbols.


The return value is the length of the expression in WORDs, or a negative number if it failed.

Definition at line 225 of file [optimize.cc](#).

References [EndSort\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), and [StoreTerm\(\)](#).

Referenced by [Optimize\(\)](#).

Here is the call graph for this function:

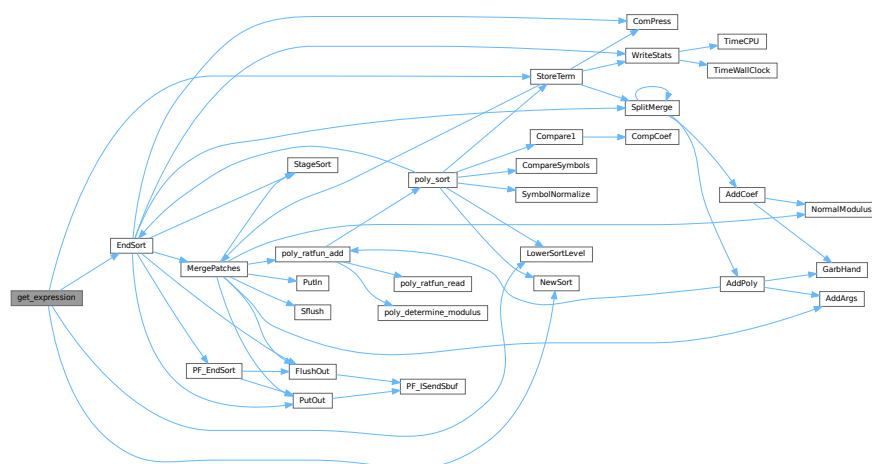

4.95.4.1 `get_brackets()`

```
vector< vector< WORD > > get_brackets ( )
```

Get brackets

4.95.5 Description

Checks whether the input expression (stored in `optimize_expr`) contains brackets. If so, this method replaces terms outside brackets by powers of SEPERATESYMBOL (equal brackets have equal powers) and the brackets are returned. If not, the result is empty.

Brackets are used for simultaneous optimization. The symbol SEPARATESYMBOL is always the first one used in a Horner scheme.

Definition at line 302 of file [optimize.cc](#).

Referenced by [Optimize\(\)](#).

4.95.5.1 `count_operators()` [1/2]

```
int count_operators (
    const WORD * expr,
    bool print = false )
```

Count operators

4.95.6 Description

Counts the number of operators in a Form-style expression.

Definition at line 422 of file [optimize.cc](#).

Referenced by [find_Horner_MCTS\(\)](#), [generate_instructions\(\)](#), [Optimize\(\)](#), [optimize_expression_given_Horner\(\)](#), and [optimize_greedy\(\)](#).

4.95.6.1 `count_operators()` [2/2]

```
int count_operators (
    const vector< WORD > & instr,
    bool print = false )
```

Count operators

4.95.7 Description

Counts the number of operators in a vector of instructions

Definition at line 476 of file [optimize.cc](#).

4.95.7.1 occurrence_order()

```
vector< WORD > occurrence_order (
    const WORD * expr,
    bool rev )
```

Occurrence order

4.95.8 Description

Extracts all variables from an expression and sorts them with most occurring first (or last, with rev=true)

Definition at line 519 of file [optimize.cc](#).

Referenced by [Optimize\(\)](#).

4.95.8.1 getpower()

```
WORD getpower (
    const WORD * term,
    int var,
    int pos )
```

Horner tree building

4.95.9 Description

Given a Form-style expression (in a buffer in memory), this builds an expression tree. The tree is determined by a multivariate Horner scheme, i.e., something of the form:

$$1+y+x*(2+y*(1+y)+x*(3-y*(...)))$$

The order of the variables is given to the method "Horner_tree", which rennumbers ad reorders the terms of the expression. Next, the recursive method "build_Horner_tree" does the actual tree construction.

The tree is represented in postfix notation. Tokens are of the following forms:

- SNUMBER tokenlength num den coefflength
- SYMBOL tokenlength variable power
- OPER_ADD or OPER_MUL

4.95.10 Note

Sets AN.poly_num_vars and allocates AN.poly_vars. The latter should be freed later. Get power of variable (helper function for build_Horner_tree)

4.95.11 Description

Returns the power of the variable "var", which is at position "pos" in this term, if it is present.

Definition at line 600 of file [optimize.cc](#).

Referenced by [build_Horner_tree\(\)](#).

4.95.11.1 fixarg()

```
void fixarg (
    UWORD * t,
    WORD & n )
```

Call GcdLong/DivLong with leading zeroes

4.95.12 Description

These method remove leading zeroes, so that GcdLong and DivLong can safely be called.

Definition at line 614 of file [optimize.cc](#).

4.95.12.1 GcdLong_fix_args()

```
void GcdLong_fix_args (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD nc )
```

Definition at line 620 of file [optimize.cc](#).

4.95.12.2 DivLong_fix_args()

```
void DivLong_fix_args (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD nc,
    UWORD * d,
    WORD nd )
```

Definition at line 626 of file [optimize.cc](#).

4.95.12.3 build_Horner_tree()

```
void build_Horner_tree (
    const WORD ** terms,
    int numterms,
    int var,
    int maxvar,
    int pos,
    vector< WORD > * res )
```

Build the Horner tree

4.95.13 Description

Constructs the Horner tree. The method processes one variable and continues recursively until the Horner scheme is completed.

"terms" is a pointer to the starts of the terms. "numterms" is the number of terms to be processed. "var" is the next variable to be processed (index between 0 and #maxvar) and "maxvar" is the last variable to be processed, so that partial Horner trees can also be constructed. "pos" is the position that the power of "var" should be in (one level further in the recursion, "pos" has increased by 0 or 1 depending on whether the previous power was 0 or not). The result is written at the pointer "res".

This method also factors out gcds of the coefficients. The result should end with "gcd OPER_MUL" at all times, so that one level higher gcds can be extracted again.

Definition at line [652](#) of file [optimize.cc](#).

References [build_Horner_tree\(\)](#), and [getpower\(\)](#).

Referenced by [build_Horner_tree\(\)](#), and [Horner_tree\(\)](#).

Here is the call graph for this function:



4.95.13.1 term_compare()

```
bool term_compare (
    const WORD * a,
    const WORD * b )
```

Term compare (helper function for Horner_tree)

4.95.14 Description

Compares two terms of the form "L SYM 4 x n coeff" or "L coeff". Lower powers of lower-indexed symbols come first. This is used to sort the terms in correct order.

Definition at line 852 of file [optimize.cc](#).

Referenced by [Horner_tree\(\)](#).

4.95.14.1 Horner_tree()

```
vector< WORD > Horner_tree (
    const WORD * expr,
    const vector< WORD > & order )
```

Prepare Horner tree building

4.95.15 Description


This method rennumbers the variables to 0...#vars-1 according to the specified order. Next, it stored pointer to individual terms and sorts the terms with higher power first. Then the sorted lists of power is used for the construction of the Horner tree.

Definition at line 873 of file [optimize.cc](#).

References [build_Horner_tree\(\)](#), and [term_compare\(\)](#).

Referenced by [optimize_expression_given_Horner\(\)](#).

Here is the call graph for this function:

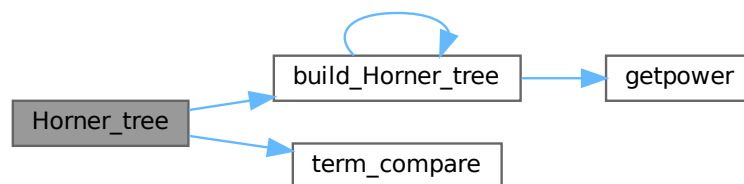

4.95.15.1 print_tree()

```
void print_tree (
    const vector< WORD > & tree )
```

Definition at line 1001 of file [optimize.cc](#).

4.95.15.2 hash_range()

```
template<typename T >
size_t hash_range (
    T * array,
    int size )
```

Definition at line 1070 of file [optimize.cc](#).

4.95.15.3 generate_instructions()

```
vector< WORD > generate_instructions (
    const vector< WORD > & tree,
    bool do_CSE )
```

Generate instructions

4.95.16 Description

Converts the expression tree to a list of instructions that directly translate to code. Instructions are of the form:

expr.nr operator length [operands]+ trailing.zero

The operands are of the form:

length [(EXTRA)SYMBOL length variable power] coeff

This method only generates binary operators. Merging is done later. The method also checks for common subexpressions and eliminates them and the flag "do_CSE" is set.

4.95.17 Implementation details

The map "ID" keeps track of which subexpressions already exist. The key is formatted as one of the following:

SYMBOL x n SNUMBER coeff OPERATOR LHS RHS

with LHS/RHS formatted as one of the following:

SNUMBER idx 0 (EXTRA)SYMBOL x n

ID[symbol] or ID[operator] equals a subexpression number. ID[coeff] equals the position of the number in the input.

The stack s is used to process the postfix expression tree. Three-word tokens of the form:

SNUMBER idx.of.coeff 0 SYMBOL x n EXTRASYMBOL x 1

are pushed onto it. Operators pop two operands and push the resulting expression.

(Extra)symbols are 1-indexed, because -X is also needed to represent -1 times this term.

There is currently a bug. The notation cannot tell if there is a single bracket and then ignores the bracket.

TODO: check if this method performs properly if do_CSE=false

Definition at line 1132 of file [optimize.cc](#).

References [count_operators\(\)](#).

Referenced by [optimize_expression_given_Horner\(\)](#).

Here is the call graph for this function:



4.95.17.1 count_operators_cse()

```
int count_operators_cse (  
    const vector< WORD > & tree )
```

Count number of operators in a binary tree, while removing CSEs on the fly. The instruction set is not created, which makes this method slightly faster.

A hash is created on the fly and is passed through the stack. TODO: find better hash functions

Definition at line 1341 of file [optimize.cc](#).

4.95.17.2 buildTree()

```
NODE * buildTree (  
    vector< WORD > & tree )
```

Definition at line 1563 of file [optimize.cc](#).

4.95.17.3 count_operators_cse_topdown()

```
int count_operators_cse_topdown (  
    vector< WORD > & tree )
```

Definition at line 1625 of file [optimize.cc](#).

4.95.17.4 simulated_annealing()

```
vector< WORD > simulated_annealing ( )
```

Definition at line 1680 of file [optimize.cc](#).

4.95.17.5 find_Horner_MCTS_expand_tree()

```
void find_Horner_MCTS_expand_tree ( )
```

Definition at line 2053 of file [optimize.cc](#).

4.95.17.6 find_Horner_MCTS()

```
void find_Horner_MCTS ( )
```

Find best Horner schemes using MCTS

4.95.18 Description


The method governs the MCTS for the best Horner schemes. It does some pre-processing, calls "find_Horner_MCTS_expand_tree" a number of times and does some post-processing.

Definition at line 2254 of file [optimize.cc](#).

References [count_operators\(\)](#), [my_random_shuffle\(\)](#), and [TimeWallClock\(\)](#).

Referenced by [Optimize\(\)](#).

Here is the call graph for this function:

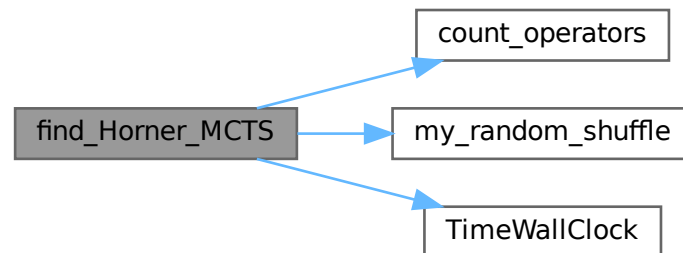

4.95.18.1 merge_operators()

```
vector< WORD > merge_operators (
    const vector< WORD > & all_instr,
    bool move_coeff )
```

Merge operators

4.95.19 Description

The input instructions form a binary DAG. This method merges expressions like

$$Z1 = a+b; Z2 = Z1+c;$$

into

$$Z2 = a+b+c;$$

An instruction is merged iff it only has one parent and the operator equals its parent's operator.

This still leaves some freedom: where should the coefficients end up in cases as:

$$Z1 = Z2 + x \Leftrightarrow Z1 = 2*Z2 + x \quad Z2 = 2*x*y \quad Z2 = x*y$$

Both are relevant, e.g. for CSE of the form "2*x" and "2*Z2". The flag "move_coeff" moves coefficients from LHS-like expressions to RHS-like expressions.

Furthermore, this method removes empty equation ($Z1=0$), that are introduced by some "optimize_greedy" substitutions.

4.95.20 Implementation details

Expressions are mostly traversed via a stack, so that parents are evaluated before their children.

With "move_coeff" set coefficients are moved, but this leads to some tricky cases, e.g.

$$Z1 = Z2 + x \quad Z2 = 2*y$$

Here Z2 reduces to the trivial equation $Z2=y$, which should be eliminated. Here the array skip[i] comes in.

Furthermore in the case

$$Z1 = Z2 + x \quad Z2 = 2*Z3 \quad Z3 = x*Z4 \quad Z4 = y*z$$

after substituting $Z1 = 2*Z3 + x$, the parent expression for Z4 becomes Z3 instead of Z2. This is where renum_par[i] comes in.

Finally, once a coefficient has been moved, skip_coeff[i] is set and this coefficient is copied into the new expression anymore.

Definition at line 2402 of file [optimize.cc](#).

Referenced by [optimize_expression_given_Horner\(\)](#).

4.95.20.1 find_optimizations()

```
vector< optimization > find_optimizations (
    const vector< WORD > & instr )
```

Find optimizations

4.95.21 Description

This method find all optimization of the form described in "class Optimization". It process every equation, looking for possible optimizations and stores them in a fast-access data structure to count the total improvement of an optimization.

Definition at line 2697 of file [optimize.cc](#).

Referenced by [optimize_greedy\(\)](#).

4.95.21.1 do_optimization()

```
bool do_optimization (
    const optimization optim,
    vector< WORD > & instr,
    int newid )
```

Do optimization

4.95.22 Description

This method performs an optimization. It scans through the equations of "optim.eqnidxs" and looks in which this optimization can still be performed (due to other performed optimizations this isn't always the case). If possible, it substitutes the common subexpression by a new extra symbol numbered "newid". Finally, the new extrasymbol is defined accordingly.

Substitutions may lead to trivial equations of the form "Zi=Zj", but these are removed in the end of the method. The method returns whether the substitution has been done once or more (or not).

Definition at line 2930 of file [optimize.cc](#).

Referenced by [optimize_greedy\(\)](#).

4.95.22.1 partial_factorize()

```
int partial_factorize (
    vector< WORD > & instr,
    int n,
    int improve )
```

Partial factorization of instructions

4.95.23 Description

This method performs partial factorization of instructions. In particular the following instructions

$Z1 = x*a*b$ $Z2 = x*c*d*e$ $Z3 = 2*x + Z1 + Z2$ + more

are replaced by

$Z1 = a*b$ $Z2 = c*d*e$ $Z3 = Zj$ + more $Zi = 2 + Z1 + Z2$ $Zj = x*Zi$

Here it is necessary that no other equations refer to Z1 and Z2. The generation of trivial instructions ($Zi=Zj$ or $Zi=x$) is prevented.

Definition at line 3479 of file [optimize.cc](#).

Referenced by [optimize_greedy\(\)](#).

4.95.23.1 `optimize_greedy()`

```
vector< WORD > optimize_greedy (
    vector< WORD > instr,
    LONG time_limit )
```

Optimize instructions greedily

4.95.24 Description

This method optimizes an expression greedily. It calls "find_optimizations" to obtain candidates and performs the best one(s) by calling "do_optimization".

How many different optimization are done, before "find_optimization" is called again, is determined by the settings "greedyminnum" and "greedymaxperc".


During the optimization process, sequences of zeroes are introduced in the instructions, since moving all instructions when one gets optimized, is very costly. Therefore, in the end, the instructions are "compressed" again to remove these extra zeroes.

Definition at line 3773 of file [optimize.cc](#).

References [count_operators\(\)](#), [do_optimization\(\)](#), [find_optimizations\(\)](#), [partial_factorize\(\)](#), and [TimeWallClock\(\)](#).

Referenced by [optimize_expression_given_Horner\(\)](#).

Here is the call graph for this function:

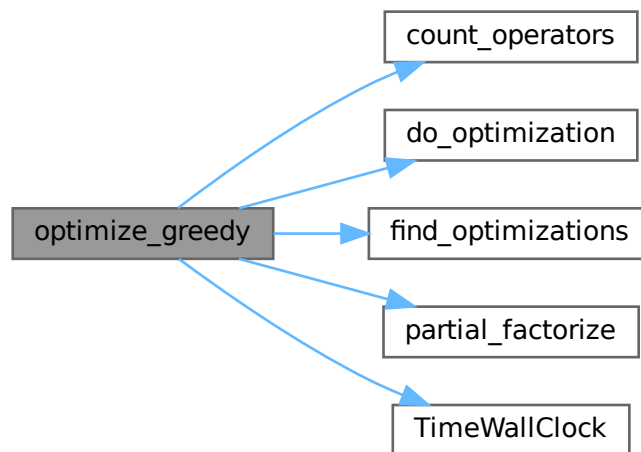

4.95.24.1 `recycle_variables()`

```
vector< WORD > recycle_variables (
    const vector< WORD > & all_instr )
```

Recycle variables

4.95.25 Description

The current input uses many temporary variables. Many of them become obsolete at some point during the evaluation of the code, so can be recycled. This method rennumbers the temporary variables, so that they are recycled. Furthermore, the input is order in depth-first order, so that the instructions can be performed consecutively.

4.95.26 Implementation details

First, for each subDAG, an estimate for the number of variables needed is made. This is done by the following recursive formula:

$$\#vars(x) = \max(\#vars(ch_i(x)) + i),$$

with $ch_i(x)$ the i -th child of x , where the childs are ordered w.r.t. $\#vars(ch_i)$. This formula is exact if the input forms a tree, and otherwise gives a reasonable estimate.

Then, the instructions are reordered in a depth-first order with childs ordered w.r.t. $\#vars$. Next, the times that variables become obsolete are found. Each LHS of an instruction is renumbered to the lowest-numbered temporary variable that is available at that time.

Definition at line 3913 of file [optimize.cc](#).

Referenced by [optimize_expression_given_Horner\(\)](#).

4.95.26.1 optimize_expression_given_Horner()

```
void optimize_expression_given_Horner ( )
```

Optimize expression given a Horner scheme

4.95.27 Description

This method picks one Horner scheme from the list of best Horner schemes, applies this scheme to the expression and then, depending on `optimize.settings`, does a common subexpression elimination (CSE) or performs greedy optimizations.


CSE is fast, while greedy might be slow. CSE followed by greedy is faster than greedy alone, but typically results in slightly worse code (not proven; just observed). eventually do greedy optimizations

Definition at line 4060 of file [optimize.cc](#).

References [count_operators\(\)](#), [generate_instructions\(\)](#), [Horner_tree\(\)](#), [merge_operators\(\)](#), [optimize_greedy\(\)](#), [recycle_variables\(\)](#), and [TimeWallClock\(\)](#).

Referenced by [Optimize\(\)](#).

Here is the call graph for this function:

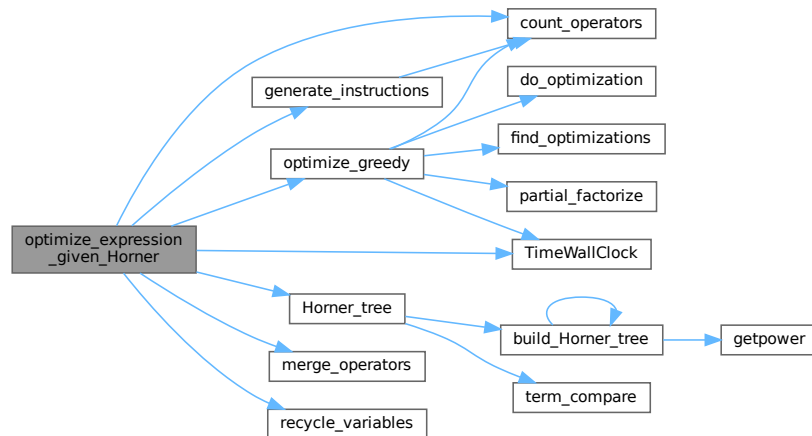

4.95.27.1 generate_output()

```

void generate_output (
    const vector< WORD > & instr,
    int exprnr,
    int extraoffset,
    const vector< vector< WORD > > & brackets )

```

Generate output

4.95.28 Description

This method prepares the instructions for printing. They are stored in Form format, so that they can be printed by "PrintExtraSymbol". The results are stored in the buffer `AO.OptimizeResult`.

Definition at line [4291](#) of file [optimize.cc](#).

Referenced by [Optimize\(\)](#).

4.95.28.1 generate_expression()

```

WORD generate_expression (
    WORD exprnr )

```

Generate expression

4.95.30.1 Optimize()

```
int Optimize (
    WORD exprnr,
    int do_print )
```

Optimization of expression

4.95.31 Description

This method takes an input expression and generates optimized code to calculate its value. The following methods are called to do so:

- (1) `get_expression` : to read to expression
- (2) `get_brackets` : find brackets for simultaneous optimization
- (3) `occurrence_order` or `find_Horner_MCTS` : to determine (the) Horner scheme(s) to use; this depends on `AO.optimize.horner`
- (4) `optimize_expression_given_Horner` : to do the optimizations for each Horner scheme; this method does either CSE or greedy optimizations dependings on `AO.optimize.method`
- (5) `generate_output` : to format the output in Form notation and store it in a buffer
- (6a) `optimize_print_code` : to print the expression (for "Print") or (6b) `generate_expression` : to modify the expression (for "#Optimize")


On ParFORM, all the processes must call this function at the same time. Then

- (1) Because only the master can access to the expression to be optimized, the master broadcast the expression to all the slaves after reading the expression (`PF_get_expression`).
- (2) `get_brackets` reads `optimize_expr` as the input and it works also on the slaves. We leave it although the bracket information is not needed on the slaves (used in (5) on the master).
- (3) and (4) `find_Horner_MCTS` and `optimize_expression_given_Horner` are parallelized.
- (5), (6a) and (6b) are needed only on the master.

Definition at line [4637](#) of file [optimize.cc](#).

References [ClearOptimize\(\)](#), [count_operators\(\)](#), [find_Horner_MCTS\(\)](#), [generate_expression\(\)](#), [generate_output\(\)](#), [get_brackets\(\)](#), [get_expression\(\)](#), [occurrence_order\(\)](#), [optimize_expression_given_Horner\(\)](#), [optimize_print_code\(\)](#), [PF_Broadcast\(\)](#), [PF_LongMultiBroadcast\(\)](#), [PF_Pack\(\)](#), [PF_PrepareLongMultiPack\(\)](#), [PF_PreparePack\(\)](#), [PF_Unpack\(\)](#), and [PutPreVar\(\)](#).

Here is the call graph for this function:

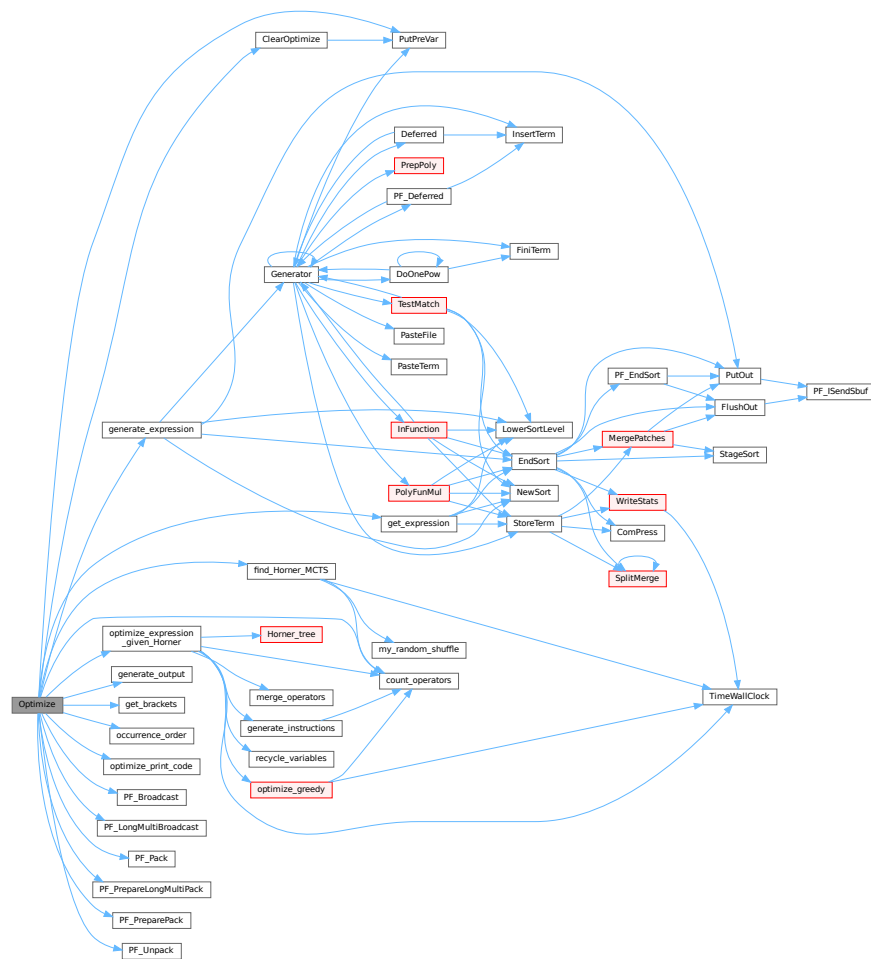

4.95.31.1 ClearOptimize()

```
int ClearOptimize (
    void )
```

Optimization of expression

4.95.32 Description

Clears the buffers that were used for optimization output. Clears the expression from the buffers (marks it to be dropped). Note: we need to use the expression by its name, because numbers may change if we drop other expressions between when we do the optimizations and clear the results (in [execute.c](#)). Also this is not 100% safe, because we could overwrite the optimized expression. But that can be done only in a Local or Global statement and hence we only have to test there that we might have to call ClearOptimize first. (in file [comexpr.c](#))

Definition at line 4974 of file [optimize.cc](#).

References [PutPreVar\(\)](#).

Referenced by [Optimize\(\)](#).

Here is the call graph for this function:



4.95.33 Variable Documentation

4.95.33.1 OPER_ADD

```
const WORD OPER_ADD = -1
```

Definition at line [120](#) of file [optimize.cc](#).

4.95.33.2 OPER_MUL

```
const WORD OPER_MUL = -2
```

Definition at line [121](#) of file [optimize.cc](#).

4.95.33.3 OPER_COMMA

```
const WORD OPER_COMMA = -3
```

Definition at line [122](#) of file [optimize.cc](#).

4.95.33.4 optimize_expr

```
WORD* optimize_expr
```

Definition at line [156](#) of file [optimize.cc](#).

4.95.33.5 optimize_best_Horner_schemes

```
vector<vector<WORD>> > optimize_best_Horner_schemes
```

Definition at line [157](#) of file [optimize.cc](#).

4.95.33.6 `optimize_num_vars`

```
int optimize_num_vars
```

Definition at line 158 of file [optimize.cc](#).

4.95.33.7 `optimize_best_num_oper`

```
int optimize_best_num_oper
```

Definition at line 159 of file [optimize.cc](#).

4.95.33.8 `optimize_best_instr`

```
vector<WORD> optimize_best_instr
```

Definition at line 160 of file [optimize.cc](#).

4.95.33.9 `optimize_best_vars`

```
vector<WORD> optimize_best_vars
```

Definition at line 161 of file [optimize.cc](#).

4.95.33.10 `mcts_factorized`

```
bool mcts_factorized
```

Definition at line 164 of file [optimize.cc](#).

4.95.33.11 `mcts_separated`

```
bool mcts_separated
```

Definition at line 164 of file [optimize.cc](#).

4.95.33.12 `mcts_vars`

```
vector<WORD> mcts_vars
```

Definition at line 165 of file [optimize.cc](#).

4.95.33.13 `mcts_root`

```
tree\_node mcts_root
```

Definition at line 166 of file [optimize.cc](#).

4.95.33.14 mcts_expr_score

```
int mcts_expr_score
```

Definition at line 167 of file [optimize.cc](#).

4.95.33.15 mcts_best_schemes

```
set<pair<int,vector<WORD>> > > mcts_best_schemes
```

Definition at line 168 of file [optimize.cc](#).

4.96 optimize.cc

[Go to the documentation of this file.](#)

```
00001
00006 /*  #[ License : */
00007 /*
00008  *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009  *   When using this file you are requested to refer to the publication
00010  *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011  *   This is considered a matter of courtesy as the development was paid
00012  *   for by FOM the Dutch physics granting agency and we would like to
00013  *   be able to track its scientific use to convince FOM of its value
00014  *   for the community.
00015  *
00016  *   This file is part of FORM.
00017  *
00018  *   FORM is free software: you can redistribute it and/or modify it under the
00019  *   terms of the GNU General Public License as published by the Free Software
00020  *   Foundation, either version 3 of the License, or (at your option) any later
00021  *   version.
00022  *
00023  *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024  *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025  *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026  *   details.
00027  *
00028  *   You should have received a copy of the GNU General Public License along
00029  *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /*
00032     #[ License :
00033     #[ includes :
00034 */
00035
00036 // #define DEBUG
00037 // #define DEBUG_MORE
00038 // #define DEBUG_MCTS
00039 // #define DEBUG_GREEDY
00040
00041 #ifdef HAVE_CONFIG_H
00042 #ifndef CONFIG_H_INCLUDED
00043 #define CONFIG_H_INCLUDED
00044 #include <config.h>
00045 #endif
00046 #endif
00047
00048 #include <vector>
00049 #include <stack>
00050 #include <algorithm>
00051 #include <set>
00052 #include <map>
00053 #include <climits>
00054 #include <cmath>
00055 #include <string>
00056 #include <algorithm>
00057 #include <iostream>
00058
00059 #ifdef APPLE64
00060 #ifndef HAVE_UNORDERED_MAP
00061 #define HAVE_UNORDERED_MAP
00062 #endif
```

```

00063 #ifndef HAVE_UNORDERED_SET
00064 #define HAVE_UNORDERED_SET
00065 #endif
00066 #endif
00067
00068 #ifdef HAVE_UNORDERED_MAP
00069     #include <unordered_map>
00070     using std::unordered_map;
00071 #elif !defined(HAVE_TR1_UNORDERED_MAP) && defined(HAVE_BOOST_UNORDERED_MAP_HPP)
00072     #include <boost/unordered_map.hpp>
00073     using boost::unordered_map;
00074 #else
00075     #include <tr1/unordered_map>
00076     using std::tr1::unordered_map;
00077 #endif
00078 #ifdef HAVE_UNORDERED_SET
00079     #include <unordered_set>
00080     using std::unordered_set;
00081 #elif !defined(HAVE_TR1_UNORDERED_SET) && defined(HAVE_BOOST_UNORDERED_SET_HPP)
00082     #include <boost/unordered_set.hpp>
00083     using boost::unordered_set;
00084 #else
00085     #include <tr1/unordered_set>
00086     using std::tr1::unordered_set;
00087 #endif
00088
00089 #if defined(HAVE_BUILTIN_POPCOUNT)
00090     static inline int popcount(unsigned int x) {
00091         return __builtin_popcount(x);
00092     }
00093 #elif defined(HAVE_POPCNT)
00094     #include <intrin.h>
00095     static inline int popcount(unsigned int x) {
00096         return __popcnt(x);
00097     }
00098 #else
00099     static inline int popcount(unsigned int x) {
00100         int count = 0;
00101         while (x > 0) {
00102             if ((x & 1) == 1) count++;
00103             x >>= 1;
00104         }
00105         return count;
00106     }
00107 #endif
00108
00109 extern "C" {
00110     #include "form3.h"
00111 }
00112
00113 // #ifdef DEBUG
00114 #include "mytime.h"
00115 // #endif
00116
00117 using namespace std;
00118
00119 // operators
00120 const WORD OPER_ADD = -1;
00121 const WORD OPER_MUL = -2;
00122 const WORD OPER_COMMA = -3;
00123
00124 // class for a node of the MCTS tree
00125 class tree_node {
00126 public:
00127     vector<tree_node> childs;
00128     double sum_results;
00129     int num_visits;
00130     WORD var;
00131     bool finished;
00132
00133     tree_node(int _var=0):
00134         sum_results(0), num_visits(0), var(_var), finished(false) {}
00135
00136     tree_node(const tree_node& other):
00137         childs(other.childs),
00138         sum_results(other.sum_results),
00139         num_visits(other.num_visits),
00140         var(other.var),
00141         finished(other.finished) {}
00142
00143     tree_node& operator=(const tree_node& other) {
00144         if (this != &other) {
00145             childs = other.childs;
00146             sum_results = other.sum_results;
00147             num_visits = other.num_visits;
00148             var = other.var;
00149             finished = other.finished;

```

```

00150     }
00151     return *this;
00152 }
00153 };
00154
00155 // global variables for multithreading
00156 WORD *optimize_expr;
00157 vector<vector<WORD> > optimize_best_Horner_schemes;
00158 int optimize_num_vars;
00159 int optimize_best_num_oper;
00160 vector<WORD> optimize_best_instr;
00161 vector<WORD> optimize_best_vars;
00162
00163 // global variables for MCTS
00164 bool mcts_factorized, mcts_separated;
00165 vector<WORD> mcts_vars;
00166 tree_node mcts_root;
00167 int mcts_expr_score;
00168 set<pair<int,vector<WORD> > > mcts_best_schemes;
00169
00170 #ifdef WITHPTHREADS
00171 pthread_mutex_t optimize_lock;
00172 #endif
00173
00174 /*
00175     #] includes :
00176     #[ print_instr :
00177 */
00178
00179 void print_instr (const vector<WORD> &instr, WORD num)
00180 {
00181     const WORD *tbegin = &instr.begin();
00182     const WORD *tend = tbegin+instr.size();
00183     for (const WORD *t=tbegin; t!=tend; t+=*(t+2)) {
00184         MesPrint("<%d> %a",num,t[2],t);
00185     }
00186 }
00187
00188 /*
00189     #] print_instr :
00190     #[ my_random_shuffle :
00191 */
00192
00193 template <class RandomAccessIterator>
00194 void my_random_shuffle (PHEAD RandomAccessIterator fr, RandomAccessIterator to) {
00195     for (int i=to-fr-1; i>0; --i)
00196         swap (fr[i],fr[wrarf(BHEAD0) % (i+1)]);
00197 }
00198
00199 /*
00200     #] my_random_shuffle :
00201     #[ get_expression :
00202 */
00203
00204 static WORD comlist[3] = {TYPETOPOLYNOMIAL,3,DOALL};
00205
00206 LONG get_expression (int exprnr) {
00207     GETIDENTITY;
00208
00209     AR.NoCompress = 1;
00210
00211     NewSort(BHEAD0);
00212     EXPRESSIONS e = Expressions+exprnr;
00213     SetScratch(AR.infile,&(e->onfile));
00214
00215     // get header term
00216     WORD *term = AT.WorkPointer;
00217     GetTerm(BHEAD term);
00218
00219     NewSort(BHEAD0);
00220
00221     // get terms
00222     while (GetTerm(BHEAD term) > 0) {
00223         AT.WorkPointer = term + *term;
00224         WORD *t1 = term;
00225         WORD *t2 = term + *term;
00226         if (ConvertToPoly(BHEAD t1,t2,comlist,1) < 0) return -1;
00227         int n = *t2;
00228         NCOPY(t1,t2,n);
00229         AT.WorkPointer = term + *term;
00230         if (StoreTerm(BHEAD term)) return -1;
00231     }
00232
00233     // sort and store in buffer
00234     LONG len = EndSort(BHEAD (WORD *) ((void *) (&optimize_expr)),2);
00235     LowerSortLevel();

```

```

00256     AT.WorkPointer = term;
00257
00258     return len;
00259 }
00260
00261 /*
00262     #] get_expression :
00263     #[ PF_get_expression :
00264 */
00265 #ifdef WITHMPI
00266
00267 // get_expression for ParFORM
00268 LONG PF_get_expression (int exprnr) {
00269     LONG len;
00270     if (PF.me == MASTER) {
00271         len = get_expression(exprnr);
00272     }
00273     if (PF.numtasks > 1) {
00274         PF_BroadcastBuffer(&optimize_expr, &len);
00275     }
00276     return len;
00277 }
00278
00279 // replace get_expression called in Optimize
00280 #define get_expression PF_get_expression
00281
00282 #endif
00283 /*
00284     #] PF_get_expression :
00285     #[ get_brackets :
00286 */
00287
00302 vector<vector<WORD> > get_brackets () {
00303
00304     // check for brackets in expression
00305     bool has_brackets = false;
00306     for (WORD *t=optimize_expr; *t!=0; t+=*t) {
00307         WORD *tend=t+*t; tend-=ABS(*tend-1));
00308         for (WORD *t1=t+1; t1<tend; t1+=*(t1+1))
00309             if (*t1 == HAAKJE)
00310                 has_brackets=true;
00311     }
00312
00313     // replace brackets by SEPARATESYMBOL
00314     vector<vector<WORD> > brackets;
00315
00316     if (has_brackets) {
00317         int exprlen=10; // we need potential space for an empty bracket
00318         for (WORD *t=optimize_expr; *t!=0; t+=*t)
00319             exprlen += *t;
00320         WORD *newexpr = (WORD *)Malloc1(exprlen*sizeof(WORD), "optimize newexpr");
00321
00322         int i=0;
00323         int sep_power = 0;
00324
00325         for (WORD *t=optimize_expr; *t!=0; t+=*t) {
00326             WORD *t1 = t+1;
00327
00328             // scan for bracket
00329             vector<WORD> bracket;
00330             for (; *t1!=HAAKJE; t1+=*(t1+1))
00331                 bracket.insert(bracket.end(), t1, t1+*(t1+1));
00332
00333             if (brackets.size()==0 || bracket!=brackets.back()) {
00334                 sep_power++;
00335                 brackets.push_back(bracket);
00336             }
00337             t1+=*(t1+1);
00338
00339             WORD left = t + *t - t1;
00340             bool more_symbols = (left != ABS(*t+*t-1));
00341
00342             // add power of SEPARATESYMBOL
00343             newexpr[i++] = 1 + left + (more_symbols ? 2 : 4);
00344             newexpr[i++] = SYMBOL;
00345             newexpr[i++] = (more_symbols ? *(t1+1) + 2 : 4);
00346             newexpr[i++] = SEPARATESYMBOL;
00347             newexpr[i++] = sep_power;
00348
00349             // add remaining terms
00350             if (more_symbols) {
00351                 t1+=2;
00352                 left-=2;
00353             }
00354             while (left-->0)
00355                 newexpr[i++] = *(t1++);
00356         }

```



```

00357 /*
00358     We insert here an empty bracket that is zero.
00359     It is used for the case that there is only a single bracket which is
00360     outside the notation for trees at a later stage.
00361
00362     There may be a problem now in that in the case of sep_power==1
00363     newexpr is bigger than optimize_expr. We have to check that.
00364 */
00365     if ( sep_power == 1 )
00366     {
00367         WORD *t;
00368         vector<WORD> bracket;
00369         bracket.push_back(0);
00370         bracket.push_back(0);
00371         bracket.push_back(0);
00372         bracket.push_back(0);
00373         sep_power++;
00374         brackets.push_back(bracket);
00375         newexpr[i++] = 8;
00376         newexpr[i++] = SYMBOL;
00377         newexpr[i++] = 4;
00378         newexpr[i++] = SEPARATESYMBOL;
00379         newexpr[i++] = sep_power;
00380         newexpr[i++] = 1;
00381         newexpr[i++] = 1;
00382         newexpr[i++] = 3;
00383         newexpr[i++] = 0;
00384         for (t=optimize_expr; *t!=0; t+=*t) {}
00385         if ( t-optimize_expr+1 < i ) { // We have to redo this
00386             M_free(optimize_expr, "$-sort space");
00387             optimize_expr = (WORD *)Malloc1(i*sizeof(WORD), "$-sort space");
00388         }
00389     }
00390     else {
00391         newexpr[i++] = 0;
00392     }
00393     memcpy(optimize_expr, newexpr, i*sizeof(WORD));
00394     M_free(newexpr, "optimize newexpr");
00395
00396     // if factorized, replace SEP by FAC and remove brackets
00397     if (brackets[0].size()>0 && brackets[0][2]==FACTORSYMBOL) {
00398         for (WORD *t=optimize_expr; *t!=0; t+=*t) {
00399             if (*t == ABS(*(t+*t-1))+1) continue;
00400             if (t[1]==SYMBOL)
00401                 for (int i=3; i<t[2]; i+=2)
00402                     if (t[i]==SEPARATESYMBOL) t[i]=FACTORSYMBOL;
00403         }
00404         return vector<vector<WORD> >();
00405     }
00406 }
00407
00408 return brackets;
00409 }
00410
00411 /*
00412     #] get_brackets :
00413     #[ count_operators :
00414 */
00415
00422 int count_operators (const WORD *expr, bool print=false) {
00423
00424     int n=0;
00425     while (*(expr+n)!=0) n+=*(expr+n);
00426
00427     int cntpow=0, cntmul=0, cntadd=0, sumpow=0;
00428     WORD maxpowfac=1, maxpowsep=1;
00429
00430     for (const WORD *t=expr; *t!=0; t+=*t) {
00431         if (t!=expr) cntadd++; // new term
00432         if (*t==ABS(*(t+*t-1))+1) continue; // only coefficient
00433
00434         int cntsym=0;
00435
00436         if (t[1]==SYMBOL)
00437             for (int i=3; i<t[2]; i+=2) {
00438                 if (t[i]==FACTORSYMBOL) {
00439                     maxpowfac = max(maxpowfac, t[i+1]);
00440                     continue;
00441                 }
00442                 if (t[i]==SEPARATESYMBOL) {
00443                     maxpowsep = max(maxpowsep, t[i+1]);
00444                     continue;
00445                 }
00446                 if (t[i+1]>2) { // (extra)symbol power>2
00447                     cntpow++;
00448                     sumpow += (int)floor(log(t[i+1])/log(2.0)) + popcount(t[i+1]) - 1;
00449                 }
00450             }
00451     }

```

```

00450         if (t[i+1]==2) cntmul++; // (extra)symbol squared
00451         cntsym++;
00452     }
00453
00454     if (ABS(*(t+*t-1))!=3 || *(t+*t-2)!=1 || *(t+*t-3)!=1) cntsym++; // non +/-1 coefficient
00455
00456     if (cntsym > 0) cntmul+=cntsym-1;
00457 }
00458
00459 cntadd -= maxpowfac-1;
00460 cntmul += maxpowfac-1;
00461
00462 cntadd -= maxpowsep-1;
00463
00464 if (print)
00465     MesPrint ("*** STATS: original %1P %1M %1A : %1", cntpow,cntmul,cntadd,sumpow+cntmul+cntadd);
00466
00467 return sumpow+cntmul+cntadd;
00468 }
00469
00476 int count_operators (const vector<WORD> &instr, bool print=false) {
00477     int cntpow=0, cntmul=0, cntadd=0, sumpow=0;
00478
00479     const WORD *ebegin = &instr.begin();
00480     const WORD *eend = ebegin+instr.size();
00481
00482     for (const WORD *e=ebegin; e!=eend; e+=*(e+2)) {
00483         for (const WORD *t=e+3; *t!=0; t+=*t) {
00484             if (t!=e+3) {
00485                 if (*(e+1)==OPER_ADD) cntadd++; // new term
00486                 if (*(e+1)==OPER_MUL) cntmul++; // new term
00487             }
00488             if (*t == ABS(*(t+*t-1))+1) continue; // only coefficient
00489             if (*(t+1)==SYMBOL || *(t+1)==EXTRASymbol) {
00490                 if (*(t+4)==2) cntmul++; // (extra)symbol squared
00491                 if (*(t+4)>2) { // (extra)symbol power>2
00492                     cntpow++;
00493                     sumpow += (int)floor(log(*(t+4))/log(2.0)) + popcount(*(t+4)) - 1;
00494                 }
00495             }
00496             if (ABS(*(t+*t-1))!=3 || *(t+*t-2)!=1 || *(t+*t-3)!=1) cntmul++; // non +/-1 coefficient
00497         }
00498     }
00499 }
00500
00501 if (print)
00502     MesPrint ("*** STATS: optimized %1P %1M %1A : %1", cntpow,cntmul,cntadd,sumpow+cntmul+cntadd);
00503
00504 return sumpow+cntmul+cntadd;
00505 }
00506
00507 /*
00508 #] count_operators :
00509 #[ occurrence_order :
00510 */
00511
00519 vector<WORD> occurrence_order (const WORD *expr, bool rev) {
00520     // count the number of occurrences of variables
00521     map<WORD,int> cnt;
00522     for (const WORD *t=expr; *t!=0; t+=*t) {
00523         if (*t == ABS(*(t+*t-1))+1) continue; // skip constant term
00524         if (t[1] == SYMBOL)
00525             for (int i=3; i<t[2]; i+=2)
00526                 cnt[t[i]]++;
00527     }
00528
00529     bool is_fac=false, is_sep=false;
00530     if (cnt.count(FACTORSYMBOL)) {
00531         is_fac=true;
00532         cnt.erase(FACTORSYMBOL);
00533     }
00534     if (cnt.count(SEPARATESYMBOL)) {
00535         is_sep=true;
00536         cnt.erase(SEPARATESYMBOL);
00537     }
00538
00539     // determine the order of the variables
00540     vector<pair<int,WORD> > cnt_order;
00541     for (map<WORD,int>::iterator i=cnt.begin(); i!=cnt.end(); i++)
00542         cnt_order.push_back(make_pair(i->second, i->first));
00543     sort(cnt_order.rbegin(), cnt_order.rend());
00544
00545     // create resulting order
00546     vector<WORD> order;
00547     for (int i=0; i<(int)cnt_order.size(); i++)
00548         order.push_back(cnt_order[i].second);
00549 }

```

```

00550
00551     if (rev) reverse(order.begin(),order.end());
00552
00553     // add FACTORSYMBOL/SEPARATESYMBOL
00554     if (is_fac) order.insert(order.begin(), FACTORSYMBOL);
00555     if (is_sep) order.insert(order.begin(), SEPARATESYMBOL);
00556
00557     return order;
00558 }
00559
00560 /*
00561     #] occurrence_order :
00562     #[ Horner_tree :
00563 */
00564
00600 WORD getpower (const WORD *term, int var, int pos) {
00601     if (*term == ABS(*(term+*term-1))+1) return 0; // constant term
00602     if (2*pos+2 >= term[2]) return 0;           // too few symbols
00603     if (term[2*pos+3] != var) return 0;         // incorrect symbol
00604     return term[2*pos+4];                       // return power
00605 }
00606
00614 void fixarg (UWORD *t, WORD &n) {
00615     int an=ABS(n), sn=SGN(n);
00616     while (*(t+an-1)==0) an--;
00617     n=an*sn;
00618 }
00619
00620 void GcdLong_fix_args (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc) {
00621     fixarg(a,na);
00622     fixarg(b,nb);
00623     GcdLong(BHEAD a,na,b,nb,c,nc);
00624 }
00625
00626 void DivLong_fix_args(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc, UWORD *d, WORD *nd)
00627 {
00628     fixarg(a,na);
00629     fixarg(b,nb);
00629     DivLong(a,na,b,nb,c,nc,d,nd);
00630 }
00631
00652 void build_Horner_tree (const WORD **terms, int numterms, int var, int maxvar, int pos, vector<WORD>
*res) {
00653
00654     GETIDENTITY;
00655
00656     if (var == maxvar) {
00657         // Horner tree is finished, so add remaining terms unfactorized
00658         // (note: since only complete Horner schemes seem to be useful, numterms=1 here
00659
00660         for (int fr=0; fr<numterms; fr++) {
00661
00662             bool empty = true;
00663             const WORD *t = terms[fr];
00664
00665             // add symbols
00666             if (*t != ABS(*(t+*t-1))+1)
00667                 for (int i=3+2*pos; i<t[2]; i+=2) {
00668                     res->push_back(SYMBOL);
00669                     res->push_back(4);
00670                     res->push_back(t[i]);
00671                     res->push_back(t[i+1]);
00672                     if (!empty) res->push_back(OPER_MUL);
00673                     empty = false;
00674                 }
00675
00676             // if empty, add a 1, since the result should look like "... coeff *"
00677             if (empty) {
00678                 res->push_back(SNUMBER);
00679                 res->push_back(5);
00680                 res->push_back(1);
00681                 res->push_back(1);
00682                 res->push_back(3);
00683             }
00684
00685             // add coefficient
00686             res->push_back(SNUMBER);
00687             WORD n = ABS(*(t+*t-1));
00688             res->push_back(n+2);
00689             for (int i=0; i<n; i++)
00690                 res->push_back(*(t+*t-n+i));
00691             res->push_back(OPER_MUL);
00692
00693             if (fr>0) res->push_back(OPER_ADD);
00694         }
00695
00696         // result should end with gcd of the terms; right now this never

```

```

00697         // triggers, but if one would allow for incomplete Horner schemes,
00698         // one should extract the gcd here
00699         if (numterms > 1) {
00700             res->push_back(SNUMBER);
00701             res->push_back(5);
00702             res->push_back(1);
00703             res->push_back(1);
00704             res->push_back(3);
00705             res->push_back(OPER_MUL);
00706         }
00707     }
00708     else {
00709         // extract variable "var" and the gcd and proceed recursively
00710
00711         WORD nnum = 0, nden = 0, ntmp = 0, ndum = 0;
00712         UWORD *num = NumberMalloc("build_Horner_tree");
00713         UWORD *den = NumberMalloc("build_Horner_tree");
00714         UWORD *tmp = NumberMalloc("build_Horner_tree");
00715         UWORD *dum = NumberMalloc("build_Horner_tree");
00716
00717         // previous coefficient for gcd extraction or coefficient multiplication
00718         int prev_coeff_idx = -1;
00719
00720         for (int fr=0; fr<numterms;) {
00721
00722             // find power of current term
00723             WORD pow = getpower(terms[fr], var, pos);
00724
00725             // find all terms with that power
00726             int to=fr+1;
00727             while (to<numterms && getpower(terms[to], var, pos) == pow) to++;
00728
00729             // recursively build Horner tree of all terms proportional to var^pow
00730             build_Horner_tree (terms+fr, to-fr, var+1, maxvar, pow==0?pos:pos+1, res);
00731
00732             if (AN.poly_vars[var] != FACTORSYMBOL && AN.poly_vars[var] != SEPARATESYMBOL) {
00733                 // if normal symbol, find gcd(numerators) and gcd(denominators)
00734                 WORD n1 = res->at(res->size()-2) / 2;
00735                 WORD *t1 = &res->at(res->size()-2-2*ABS(n1));
00736
00737                 WORD *t2 = fr==0 ? t1 : &res->at(prev_coeff_idx);
00738                 WORD n2 = fr==0 ? n1 : *(t2+(t2+1)-1) / 2;
00739                 if (fr>0) t2+=2;
00740
00741                 GcdLong_fix_args(BHEAD (UWORD *)t1,n1,(UWORD *)t2,n2,num,&nnum);
00742                 GcdLong_fix_args(BHEAD (UWORD *)t1+ABS(n1),ABS(n1),(UWORD
00743 *t2+ABS(n2),ABS(n2),den,&nden);
00744
00745                 // divide out gcds; note: leading zeroes can be added here
00746                 for (int i=0; i<2; i++) {
00747                     if (i==1 && fr==0) break;
00748
00749                     WORD *t = i==0 ? t1 : t2;
00750                     WORD n = i==0 ? n1 : n2;
00751
00752                     DivLong_fix_args((UWORD *)t, n, num, nnum, tmp, &ntmp, dum, &ndum);
00753                     for (int j=0; j<ABS(ntmp); j++) *t++ = tmp[j];
00754                     for (int j=0; j<ABS(n)-ABS(ntmp); j++) *t++ = 0;
00755
00756                     if (SGN(ntmp) != SGN(n)) n=-n;
00757
00758                     DivLong_fix_args((UWORD *)t, n, den, nden, tmp, &ntmp, dum, &ndum);
00759                     for (int j=0; j<ABS(ntmp); j++) *t++ = tmp[j];
00760                     for (int j=0; j<ABS(n)-ABS(ntmp); j++) *t++ = 0;
00761
00762                     *t++ = SGN(n) * (2*ABS(n)+1);
00763                 }
00764
00765                 // add the addition operator
00766                 if (fr>0) res->push_back(OPER_ADD);
00767
00768                 // add the power of "var"
00769                 WORD nextpow = (to==numterms ? 0 : getpower(terms[to], var, pos));
00770
00771                 if (pow-nextpow > 0) {
00772                     res->push_back(SYMBOL);
00773                     res->push_back(4);
00774                     res->push_back(var);
00775                     res->push_back(pow-nextpow);
00776                     res->push_back(OPER_MUL);
00777                 }
00778
00779                 // add the extracted gcd
00780                 res->push_back(SNUMBER);
00781                 WORD n = MaX(ABS(nnum),nden);
00782                 res->push_back(n*2+3);
00783                 for (int i=0; i<ABS(nnum); i++) res->push_back(num[i]);

```

```

00783         for (int i=0; i<n-ABS(nnum); i++) res->push_back(0);
00784         for (int i=0; i<nden; i++) res->push_back(den[i]);
00785         for (int i=0; i<n-ABS(nden); i++) res->push_back(0);
00786         res->push_back(SGN(nnum)*(2*n+1));
00787         res->push_back(OPER_MUL);
00788
00789         prev_coeff_idx = res->size() - ABS(res->at(res->size()-2)) - 3;
00790     }
00791     else if (AN.poly_vars[var]==FACTORSYMBOL) {
00792
00793         // if factorsymbol, multiply overall integer contents
00794
00795         if (fr>0) {
00796             WORD n1 = res->at(res->size()-2) / 2;
00797             WORD *t1 = &res->at(res->size()-2-2*ABS(n1));
00798             WORD *t2 = &res->at(prev_coeff_idx);
00799             WORD n2 = *(t2+(t2+1)-1) / 2;
00800             t2+=2;
00801
00802             MulRat(BHEAD (UWORD *)t1,n1, (UWORD *)t2,n2,tmp,&ntmp);
00803
00804             // replace previous coefficient with 1
00805             n2=ABS(n2);
00806             for (int i=0; i<ABS(n2); i++)
00807                 t2[i] = t2[n2+i] = i==0 ? 1 : 0;
00808             t2[2*n2] = 2*n2+1;
00809
00810             // remove this coefficient
00811             for (int i=0; i<2*ABS(n1)+2; i++)
00812                 res->pop_back();
00813
00814             // add product
00815             res->back() = 2*ABS(ntmp)+3; // adjust size of term
00816             res->insert(res->end(), tmp, tmp+2*ABS(ntmp)); // num/den coefficient
00817             res->push_back(SGN(ntmp)*(2*ABS(ntmp)+1)); // size of coefficient
00818             res->push_back(OPER_MUL); // operator
00819         }
00820
00821         prev_coeff_idx = res->size() - ABS(res->at(res->size()-2)) - 3;
00822
00823         // multiply previous factors with this factor
00824         if (fr>0)
00825             res->push_back(OPER_MUL);
00826     }
00827     else { // AN.poly_vars[var]==SEPARATESYMBOL
00828         if (fr>0)
00829             res->push_back(OPER_COMMA);
00830         prev_coeff_idx = -1;
00831     }
00832
00833     fr=to;
00834 }
00835
00836 // cleanup
00837 NumberFree(dum,"build_Horner_tree");
00838 NumberFree(tmp,"build_Horner_tree");
00839 NumberFree(den,"build_Horner_tree");
00840 NumberFree(num,"build_Horner_tree");
00841 }
00842 }
00843
00852 bool term_compare(const WORD *a, const WORD *b) {
00853     if (*a == ABS(*(a++a-1))+1) return true; // coefficient comes first
00854     if (*b == ABS(*(b++b-1))+1) return false;
00855     if (a[1]!=SYMBOL) return true;
00856     if (b[1]!=SYMBOL) return false;
00857     for (int i=3; i<a[2] && i<b[2]; i+=2) {
00858         if (a[i] !=b[i] ) return a[i] >b[i];
00859         if (a[i+1]!=b[i+1]) return a[i+1]<b[i+1];
00860     }
00861     return a[2]<b[2];
00862 }
00863
00873 vector<WORD> Horner_tree(const WORD *expr, const vector<WORD> &order) {
00874     #ifdef DEBUG
00875         MesPrint ("*** [%s, w=%w] CALL: Horner_tree(%a)", thetime_str().c_str(), order.size(), &order[0]);
00876     #endif
00877
00878     GETIDENTITY;
00879
00880     // find the renumbering scheme (new numbers are 0,1,...,#vars-1)
00881     map<WORD,WORD> renum;
00882     AN.poly_num_vars = order.size();
00883     AN.poly_vars = (WORD *)Malloca1(AN.poly_num_vars*sizeof(WORD), "AN.poly_vars");
00884     for (int i=0; i<AN.poly_num_vars; i++) {
00885         AN.poly_vars[i] = order[i];
00886         renum[order[i]] = i;
00887     }

```

```

00887     }
00888
00889     // sort variables in individual terms using bubble sort
00890     WORD* sorted;
00891     WORD* dynamicAlloc = 0;
00892     LONG sumsize = 0;
00893
00894     for (const WORD *t=expr; *t!=0; t+=*t) {
00895         sumsize += *t;
00896     }
00897
00898     // We actually need sumsize + 1 WORDS available, due to the "*sorted = 0;"
00899     // at the end of the sort loop.
00900     if ( AT.WorkPointer + sumsize + 1 > AT.WorkTop ) {
00901         dynamicAlloc = (WORD*)Malloc1(sizeof(*dynamicAlloc)*(sumsize+1), "Horner_tree alloc");
00902         sorted = dynamicAlloc;
00903     }
00904     else {
00905         sorted = AT.WorkPointer;
00906     }
00907
00908     for (const WORD *t=expr; *t!=0; t+=*t) {
00909         memcpy(sorted, t, *t*sizeof(WORD));
00910
00911         if (*t != ABS(*t+*t-1))+1) {
00912             // non-constant term
00913
00914             // renumber variables, adding new variables if necessary
00915             for (int i=3; i<sorted[2]; i+=2) {
00916                 if (!renum.count(sorted[i])) {
00917                     renum[sorted[i]] = AN.poly_num_vars;
00918
00919                     WORD *new_poly_vars = (WORD *)Malloc1((AN.poly_num_vars+1)*sizeof(WORD),
00920 "AN.poly_vars");
00921                     memcpy(new_poly_vars, AN.poly_vars, AN.poly_num_vars*sizeof(WORD));
00922                     M_free(AN.poly_vars, "poly_vars");
00923                     AN.poly_vars = new_poly_vars;
00924                     AN.poly_vars[AN.poly_num_vars] = sorted[i];
00925                     AN.poly_num_vars++;
00926                 }
00927                 sorted[i] = renum[sorted[i]];
00928             }
00929             // order variables
00930             for (int i=0; i<sorted[2]/2; i++)
00931                 for (int j=3; j+2<sorted[2]; j+=2)
00932                     if (sorted[j] > sorted[j+2]) {
00933                         swap(sorted[j], sorted[j+2]);
00934                         swap(sorted[j+1], sorted[j+3]);
00935                     }
00936
00937             sorted += *sorted;
00938         }
00939
00940         *sorted = 0;
00941         if ( dynamicAlloc ) {
00942             sorted = dynamicAlloc;
00943         }
00944         else {
00945             sorted = AT.WorkPointer;
00946         }
00947
00948         // find pointers to all terms and sort them efficiently
00949         vector<const WORD *> terms;
00950         for (const WORD *t=sorted; *t!=0; t+=*t)
00951             terms.push_back(t);
00952         sort(terms.rbegin(), terms.rend(), term_compare);
00953
00954         // construct the Horner tree
00955         vector<WORD> res;
00956         build_Horner_tree(&terms[0], terms.size(), 0, AN.poly_num_vars, 0, &res);
00957
00958         // remove leading zeroes in coefficients
00959         int j=0;
00960         for (int i=0; i<(int)res.size(); i++) {
00961             if (res[i]==OPER_ADD || res[i]==OPER_MUL || res[i]==OPER_COMMA)
00962                 res[j++] = res[i++];
00963             else if (res[i]==SYMBOL) {
00964                 memmove(&res[j], &res[i], res[i+1]*sizeof(WORD));
00965                 i+=res[j+1];
00966                 j+=res[j+1];
00967             }
00968             else if (res[i]==SNUMBER) {
00969                 int n = (res[i+1]-2)/2;
00970                 int dn = 0;
00971                 while (res[i+1+n-dn]==0 && res[i+1+2*n-dn]==0) dn++;
00972                 res[j++] = SNUMBER;

```

```

00973         res[j++] = 2*(n-dn) + 3;
00974         memmove(&res[j], &res[i+2], (n-dn)*sizeof(WORD));
00975         j+=n-dn;
00976         memmove(&res[j], &res[i+n+2], (n-dn)*sizeof(WORD));
00977         j+=n-dn;
00978         res[j++] = SGN(res[i+2*n+2])*(2*(n-dn)+1);
00979         i+=2*n+3;
00980     }
00981 }
00982 res.resize(j);
00983
00984 if ( dynamicAlloc ) {
00985     M_free(dynamicAlloc, "Horner_tree alloc");
00986 }
00987
00988 #ifdef DEBUG
00989     MesPrint ("*** [%s, w=%w] DONE: Horner_tree(%a)", thetime_str().c_str(), order.size(), &order[0]);
00990 #endif
00991
00992     return res;
00993 }
00994
00995 /*
00996  #] Horner_tree :
00997  #[ print_tree :
00998 */
00999
01000 // print Horner tree (for debugging)
01001 void print_tree (const vector<WORD> &tree) {
01002
01003     GETIDENTITY;
01004
01005     for (int i=0; i<(int)tree.size(); ) {
01006         if (tree[i]==OPER_ADD) {
01007             MesPrint("+");
01008             i++;
01009         }
01010         else if (tree[i]==OPER_MUL) {
01011             MesPrint("*");
01012             i++;
01013         }
01014         else if (tree[i]==OPER_COMMA) {
01015             MesPrint(",");
01016             i++;
01017         }
01018         else if (tree[i]==SNUMBER) {
01019             UBYTE buf[100];
01020             int n = tree[i+tree[i+1]-1]/2;
01021             PrtLong((UWORD *)&tree[i+2], n, buf);
01022             int l = strlen((char *)buf);
01023             buf[l]='/';
01024             n=ABS(n);
01025             PrtLong((UWORD *)&tree[i+2+n], n, buf+1+1);
01026             MesPrint("%s",buf);
01027             i+=tree[i+1];
01028         }
01029         else if (tree[i]==SYMBOL) {
01030             if (AN.poly_vars[tree[i+2]] < 10000)
01031                 MesPrint("%s^%d", VARNAME(symbols,AN.poly_vars[tree[i+2]]), tree[i+3]);
01032             else
01033                 MesPrint("Z%d^%d", MAXVARIABLES-AN.poly_vars[tree[i+2]], tree[i+3]);
01034             i+=tree[i+1];
01035         }
01036         else {
01037             MesPrint("error");
01038             exit(1);
01039         }
01040
01041         MesPrint(" ");
01042     }
01043
01044     MesPrint("");
01045 }
01046
01047 /*
01048  #] print_tree :
01049  #[ generate_instructions :
01050 */
01051
01052
01053 struct CSEHash {
01054     size_t operator()(const vector<WORD>& n) const {
01055         return n[0];
01056     }
01057 };
01058
01059 struct CSEEq {

```

```

01060     bool operator() (const vector<WORD>& lhs, const vector<WORD>& rhs) const {
01061         if (lhs.size() != rhs.size()) return false;
01062         for (unsigned int i = 1; i < lhs.size(); i++) {
01063             if (lhs[i] != rhs[i]) return false;
01064         }
01065         return true;
01066     }
01067 };
01068
01069
01070 template<typename T> size_t hash_range(T* array, int size) {
01071     size_t hash = 0;
01072
01073     for (int i = 0; i < size; i++) {
01074         hash ^= array[i] + 0x9e3779b9 + (hash « 6) + (hash » 2);
01075     }
01076
01077     return hash;
01078 }
01079
01132 vector<WORD> generate_instructions (const vector<WORD> &tree, bool do_CSE) {
01133     #ifdef DEBUG
01134         MesPrint ("*** [%s, w=%w] CALL: generate_instructions(cse=%d)",
01135                 thetime_str().c_str(), do_CSE?1:0);
01136     #endif
01137
01138     typedef unordered_map<vector<WORD>, int, CSEHash, CSEEq> csemap;
01139     csemap ID;
01140
01141     // reserve lots of space, to prevent later rehashes
01142     // TODO: what if this is too large? make a parameter?
01143     if (do_CSE) {
01144         ID.rehash(mcts_expr_score * 2);
01145     }
01146
01147     // s is a stack of operands to process when you encounter operators
01148     // in the postfix expression tree. Operands consist of three WORDs,
01149     // formatted as the LHS/RHS of the keys in ID.
01150     stack<int> s;
01151     vector<WORD> instr;
01152     WORD numinstr = 0;
01153     vector<WORD> x;
01154
01155     // process the expression tree
01156     for (int i=0; i<(int)tree.size(); i) {
01157         x.clear();
01158
01159         if (tree[i]==SNUMBER) {
01160             WORD hash = hash_range(&tree[i], tree[i + 1]);
01161             x.push_back(hash);
01162             x.push_back(SNUMBER);
01163             x.insert(x.end(),&tree[i],&tree[i]+tree[i+1]);
01164             int sign = SGN(x.back());
01165             x.back() *= sign;
01166
01167             std::pair<csemap::iterator, bool> suc = ID.insert(csemap::value_type(x, i + 1));
01168             s.push(0);
01169             s.push(sign * suc.first->second);
01170             s.push(SNUMBER);
01171             s.push(hash);
01172             i+=tree[i+1];
01173         }
01174         else if (tree[i]==SYMBOL) {
01175             WORD hash = hash_range(&tree[i], tree[i + 1]);
01176             if (tree[i+3]>1) {
01177                 x.push_back(hash);
01178                 x.push_back(SYMBOL);
01179                 x.push_back(tree[i+2]+1); // variable (1-indexed)
01180                 x.push_back(tree[i+3]); // power
01181
01182                 csemap::iterator it = ID.find(x);
01183                 if (do_CSE && it != ID.end()) {
01184                     // already-seen power of a symbol
01185                     s.push(1);
01186                     s.push(it->second);
01187                     s.push(EXTRASYMBOL);
01188                 } else {
01189                     //MesPrint ("strange");
01190                     if (numinstr == MAXPOSITIVE) {
01191                         MesPrint ((char *) "ERROR: too many temporary variables needed in
optimization");
01192                         Terminate(-1);
01193                     }
01194
01195                     // new power greater than 1 of a symbol
01196                     instr.push_back(numinstr); // expr.nr
01197                     instr.push_back(OPER_MUL); // operator

```



```

01198         instr.push_back(9+OPTHEAD); // length total
01199         instr.push_back(8);          // length operand
01200         instr.push_back(SYMBOL);     // SYMBOL
01201         instr.push_back(4);          // length symbol
01202         instr.push_back(tree[i+2]);  // variable
01203         instr.push_back(tree[i+3]);  // power
01204         instr.push_back(1);          // numerator
01205         instr.push_back(1);          // denominator
01206         instr.push_back(3);          // length coeff
01207         instr.push_back(0);          // trailing 0
01208
01209         ID[x] = ++numinstr;
01210         s.push(1);
01211         s.push(numinstr);
01212         s.push(EXTRASymbol);
01213     }
01214 }
01215 else {
01216     // power of 1
01217     s.push(tree[i+3]); // power
01218     s.push(tree[i+2]+1); // variable (1-indexed)
01219     s.push(SYMBOL);
01220 }
01221
01222 s.push(hash); // push hash
01223 i+=tree[i+1];
01224 }
01225 else { // tree[i]==OPERATOR
01226     int oper = tree[i];
01227     i++;
01228
01229     x.push_back(0); // placeholder for hash
01230     x.push_back(oper);
01231     vector<WORD> hash;
01232     hash.push_back(oper);
01233
01234     // get two operands from the stack
01235     for (int operand=0; operand<2; operand++) {
01236         hash.push_back(s.top()); s.pop();
01237         x.push_back(s.top()); s.pop();
01238         x.push_back(s.top()); s.pop();
01239         x.push_back(s.top()); s.pop();
01240     }
01241
01242     x[0] = hash_range(&hash[0], 3);
01243
01244     // get rid of multiplications by +/-1
01245     if (oper==OPER_MUL) {
01246         bool do_continue = false;
01247
01248         for (int operand=0; operand<2; operand++) {
01249             int idx_oper1 = operand==0 ? 2 : 5;
01250             int idx_oper2 = operand==0 ? 5 : 2;
01251
01252             // check whether operand 1 equals +/-1
01253             if (x[idx_oper1]==SNUMBER) {
01254
01255                 int idx = ABS(x[idx_oper1+1])-1;
01256                 if (tree[idx+2]==1 && tree[idx+3]==1 && ABS(tree[idx+4])==3) {
01257                     // push +/- other operand and continue
01258                     s.push(x[idx_oper2+2]);
01259                     s.push(x[idx_oper2+1]*SGN(x[idx_oper1+1]));
01260                     s.push(x[idx_oper2]);
01261                     s.push(hash[1 + (operand + 1) % 2]);
01262                     do_continue = true;
01263                     break;
01264                 }
01265             }
01266         }
01267
01268         if (do_continue) continue;
01269     }
01270
01271     // check whether this subexpression has been seen before
01272     // if not, generate instruction to define it
01273     csemap::iterator it = ID.find(x);
01274     if (!do_CSE || it == ID.end()) {
01275         if (numinstr == MAXPOSITIVE) {
01276             MesPrint((char *) "ERROR: too many temporary variables needed in optimization");
01277             Terminate(-1);
01278         }
01279
01280         instr.push_back(numinstr); // expr.nr.
01281         instr.push_back(x[1]);     // operator
01282         instr.push_back(3);        // length
01283
01284         ID[x] = ++numinstr;

```

```

01285
01286         int lenidx = instr.size()-1;
01287
01288         for (int j=0; j<2; j++)
01289             if (x[3*j+2]==SYMBOL || x[3*j+2]==EXTRASYMBOL) {
01290                 instr.push_back(8); // length total
01291                 instr.push_back(x[3*j+2]); // (extra)symbol
01292                 instr.push_back(4); // length (extra)symbol
01293                 instr.push_back(ABS(x[3*j+3])-1); // variable (0-indexed)
01294                 instr.push_back(x[3*j+4]); // power
01295                 instr.push_back(1); // numerator
01296                 instr.push_back(1); // denominator
01297                 instr.push_back(3*SGN(x[3*j+3])); // length coeff
01298                 instr[lenidx] += 8;
01299             }
01300             else { // x[3*j+1]==SNUMBER
01301                 int t = ABS(x[3*j+3])-1;
01302                 instr.push_back(tree[t+1]-1); // length number
01303                 instr.insert(instr.end(), &tree[t+2], &tree[t]+tree[t+1]); // digits
01304                 instr.back() *= SGN(instr.back()) * SGN(x[3*j+3]);
01305                 instr[lenidx] += tree[t+1]-1;
01306             }
01307
01308         instr.push_back(0); // trailing 0
01309         instr[lenidx]++;
01310     }
01311
01312     // push new expression on the stack
01313     s.push(1);
01314     s.push(ID[x]);
01315     s.push(EXTRASYMBOL);
01316     s.push(x[0]); // push hash
01317 }
01318 }
01319
01320 #ifdef DEBUG
01321     MesPrint ("*** [%s, w=%w] DONE: generate_instructions(cse=%d) : numoper=%d",
01322             thetime_str().c_str(), do_CSE?1:0, count_operators(instr));
01323 #endif
01324
01325     return instr;
01326 }
01327
01328 /*
01329 #] generate_instructions :
01330 #[ count_operators_cse :
01331 */
01332
01333
01334 int count_operators_cse (const vector<WORD> &tree) {
01342     //MesPrint ("*** [%s] Starting CSEE", thetime_str().c_str());
01343
01344     typedef unordered_map<vector<WORD>, int, CSEHash, CSEEq> csemap;
01345     csemap ID;
01346
01347     // reserve lots of space, to prevent later rehashes
01348     // TODO: what if this is too large? make a parameter?
01349     ID.rehash(mcts_expr_score * 2);
01350
01351     // s is a stack of operands to process when you encounter operators
01352     // in the postfix expression tree. Operands consist of three WORDs,
01353     // formatted as the LHS/RHS of the keys in ID.
01354     stack<int> s;
01355     int numinstr = 0, numcommas = 0;
01356     vector<WORD> x;
01357
01358     // process the expression tree
01359     for (int i=0; i<(int)tree.size();) {
01360         x.clear();
01361
01362         if (tree[i]==SNUMBER) {
01363             WORD hash = hash_range(&tree[i], tree[i + 1]);
01364             x.push_back(hash);
01365             x.push_back(SNUMBER);
01366             x.insert(x.end(), &tree[i], &tree[i]+tree[i+1]);
01367             int sign = SGN(x.back());
01368             x.back() *= sign;
01369
01370             std::pair<csemap::iterator, bool> suc = ID.insert(csemap::value_type(x, i + 1));
01371             s.push(0);
01372             s.push(sign * suc.first->second);
01373             s.push(SNUMBER);
01374             s.push(hash);
01375             i+=tree[i+1];
01376         }
01377         else if (tree[i]==SYMBOL) {
01378             WORD hash = hash_range(&tree[i], tree[i + 1]);

```

```

01379         if (tree[i+3]>1) {
01380             x.push_back(hash);
01381             x.push_back(SYMBOL);
01382             x.push_back(tree[i+2]+1); // variable (1-indexed)
01383             x.push_back(tree[i+3]); // power
01384
01385             csemap::iterator it = ID.find(x);
01386             if (it != ID.end()) {
01387                 // already-seen power of a symbol
01388                 s.push(1);
01389                 s.push(it->second);
01390                 s.push(EXTRASymbol);
01391             } else {
01392                 if (tree[i + 3] == 2)
01393                     numinstr++;
01394                 else
01395                     numinstr += (int)floor(log(tree[i+3])/log(2.0)) + popcount(tree[i+3]) - 1;
01396
01397                 ID[x] = numinstr;
01398                 s.push(1);
01399                 s.push(numinstr);
01400                 s.push(EXTRASymbol);
01401             }
01402         }
01403     else {
01404         // power of 1
01405         s.push(tree[i+3]); // power
01406         s.push(tree[i+2]+1); // variable (1-indexed)
01407         s.push(SYMBOL);
01408     }
01409
01410     s.push(hash); // push hash
01411
01412     i+=tree[i+1];
01413 }
01414 else { // tree[i]==OPERATOR
01415     int oper = tree[i];
01416     i++;
01417
01418     x.push_back(0); // placeholder for hash
01419     x.push_back(oper);
01420     vector<WORD> hash;
01421     hash.push_back(oper);
01422
01423     // get two operands from the stack
01424     for (int operand=0; operand<2; operand++) {
01425         hash.push_back(s.top()); s.pop();
01426         x.push_back(s.top()); s.pop();
01427         x.push_back(s.top()); s.pop();
01428         x.push_back(s.top()); s.pop();
01429     }
01430
01431     x[0] = hash_range(&hash[0], 3);
01432
01433     // get rid of multiplications by +/-1
01434     if (oper==OPER_MUL) {
01435         bool do_continue = false;
01436
01437         for (int operand=0; operand<2; operand++) {
01438             int idx_oper1 = operand==0 ? 2 : 5;
01439             int idx_oper2 = operand==0 ? 5 : 2;
01440
01441             // check whether operand 1 equals +/-1
01442             if (x[idx_oper1]==SNUMBER) {
01443                 int idx = ABS(x[idx_oper1+1])-1;
01444                 if (tree[idx+2]==1 && tree[idx+3]==1 && ABS(tree[idx+4])==3) {
01445                     // push +/- other operand and continue
01446                     s.push(x[idx_oper2+2]);
01447                     s.push(x[idx_oper2+1]*SGN(x[idx_oper1+1]));
01448                     s.push(x[idx_oper2]);
01449                     s.push(hash[1 + (operand + 1) % 2]);
01450                     do_continue = true;
01451                     break;
01452                 }
01453             }
01454         }
01455     }
01456
01457     if (do_continue) continue;
01458 }
01459
01460 // check whether this subexpression has been seen before
01461 // if not, generate instruction to define it
01462 csemap::iterator it = ID.find(x);
01463 if (it == ID.end()) {
01464     if (numinstr == MAXPOSITIVE) {

```

```

01466         MesPrint((char *)"ERROR: too many temporary variables needed in optimization");
01467         Terminate(-1);
01468     }
01469
01470     if (oper == OPER_COMMA) numcommas++;
01471     ID[x] = ++numinstr;
01472     s.push(1);
01473     s.push(numinstr);
01474     s.push(EXTRASymbol);
01475 } else {
01476     // push new expression on the stack
01477     s.push(1);
01478     s.push(it->second);
01479     s.push(EXTRASymbol);
01480 }
01481
01482     s.push(x[0]); // push hash
01483 }
01484 }
01485
01486 //MesPrint ("*** [%s] Stopping CSEE", thetime_str().c_str());
01487 return numinstr - numcommas;
01488 }
01489
01490 /*
01491 #] count_operators_cse :
01492 #[ count_operators_cse_topdown :
01493 */
01494
01495 typedef struct node {
01496     const WORD* data;
01497     struct node* l;
01498     struct node* r; // TODO: add l,r to data?
01499     WORD sign; // TODO: use data for this?
01500     UWORD hash;
01501
01502     node() : l(NULL), r(NULL), sign(1), hash(0) {};
01503     node(const WORD* data) : data(data), l(NULL), r(NULL), sign(1), hash(0) {};
01504
01505     // a minus sign in the tree should only count as a different entry if
01506     // it is a compound expression: a = -a, but T+V != T+V
01507     int cmp(const struct node* rhs) const {
01508         if (this == rhs) return 0;
01509
01510         if (data[0] != rhs->data[0]) return data[0] < rhs->data[0] ? -1 : 1;
01511         int mod = data[0] == SNUMBER ? -1 : 0; // don't check sign, for numbers
01512         if (data[0] == SYMBOL || data[0] == SNUMBER) {
01513             for (int i = 0; i < data[1] + mod; i++) {
01514                 if (data[i] != rhs->data[i]) return data[i] < rhs->data[i] ? -1 : 1;
01515             }
01516         } else {
01517             int lv = l->cmp(rhs->l);
01518             if (lv != 0) return lv;
01519             int rv = r->cmp(rhs->r);
01520             if (rv != 0) return rv;
01521
01522             // TODO: only for ADD operation
01523             if (l->sign != rhs->l->sign) return l->sign < rhs->l->sign ? -1 : 1;
01524             if (r->sign != rhs->r->sign) return r->sign < rhs->r->sign ? -1 : 1;
01525         }
01526
01527         return 0;
01528     }
01529
01530     // less than operator
01531     bool operator() (const struct node* lhs, const struct node* rhs) const
01532     {
01533         return lhs->cmp(rhs) < 0;
01534     }
01535
01536     void calcHash() {
01537         int mod = data[0] == SNUMBER ? -1 : 0; // don't check sign, for numbers
01538         if (data[0] == SYMBOL || data[0] == SNUMBER) {
01539             hash = hash_range(data, data[1] + mod);
01540         } else {
01541             if (l->hash == 0) l->calcHash();
01542             if (r->hash == 0) r->calcHash();
01543
01544             // signs only matter for compound expressions
01545             size_t newr[] = {(size_t)data[0], l->hash, (size_t)l->sign, r->hash, (size_t)r->sign};
01546             hash = hash_range(newr, 5);
01547         }
01548     }
01549 } NODE;
01550
01551 struct NodeHash {
01552     size_t operator() (const NODE* n) const {

```

```

01553         return n->hash; // already computed
01554     }
01555 };
01556
01557 struct NodeEq {
01558     bool operator()(const NODE* lhs, const NODE* rhs) const {
01559         return lhs->cmp(rhs) == 0;
01560     }
01561 };
01562
01563 NODE* buildTree(vector<WORD> &tree) {
01564     //MesPrint ("*** [%s] Starting CSEE topdown", thetime_str().c_str());
01565
01566     // allocate spaces for the tree, cannot be more nodes than tree size
01567     NODE* ar = (NODE*)Malloca(tree.size() * sizeof(NODE), "CSE tree");
01568     NODE* c = 0;
01569     unsigned int curIndex = 0;
01570
01571     stack<NODE*> st;
01572     for (int i=0; i<(int)tree.size(); i++) {
01573         c = ar + curIndex;
01574         new (c) NODE(&tree[i]); // placement new
01575         curIndex++;
01576
01577         if (tree[i]==SYMBOL || tree[i] == SNUMBER) {
01578             // extract the sign to a new class member
01579             if (tree[i] == SNUMBER) {
01580                 c->sign = SGN(tree[i + tree[i + 1] -1]);
01581             }
01582
01583             c->calcHash();
01584             st.push(c);
01585             i+=tree[i+1];
01586         } else {
01587             c->r = st.top(); st.pop();
01588             c->l = st.top(); st.pop();
01589
01590             // filter *1 and *-1
01591             // TODO: also multiply if there are two numbers?
01592             if (c->data[0] == OPER_MUL) {
01593                 NODE* ch[] = {c->r, c->l};
01594                 for (int j = 0; j < 2; j++)
01595                     if (ch[j]->data[0] == SNUMBER && ch[j]->data[1] == 5 && ch[j]->data[2]==1 &&
01596                         ch[j]->data[3]==1) {
01597                         ch[(j+1)%2]->sign *= ch[j]->sign; // transfer sign
01598                         c = ch[(j+1)%2];
01599                         break;
01600                     }
01601
01602             c->calcHash();
01603             st.push(c);
01604             i++;
01605         }
01606     }
01607
01608     // TODO: reallocate to smaller size? Could save memory
01609     //MesPrint("Memory difference: %d vs %d", curIndex, tree.size());
01610
01611     // we want to make the root of the tree the first element
01612     // so that we can easily free the array.
01613     // we swap the first element with the root
01614     // we need to change the pointer in the operator node that has this element as a child
01615     // TODO: check performance
01616     for (unsigned int i = 0; i < curIndex; i++) {
01617         if (ar[i].l == ar) ar[i].l = st.top();
01618         if (ar[i].r == ar) ar[i].r = st.top();
01619     }
01620
01621     swap(ar[0], *st.top());
01622     return ar;
01623 }
01624
01625 int count_operators_cse_topdown (vector<WORD> &tree) {
01626     typedef unordered_set<NODE*, NodeHash, NodeEq> nodeset;
01627     nodeset ID;
01628
01629     // reserve lots of space, to prevent later rehashes
01630     // TODO: what if this is too large? make a parameter?
01631     ID.rehash(mcts_expr_score * 2);
01632
01633     int numinstr = 0;
01634
01635     NODE* root = buildTree(tree);
01636
01637     stack<NODE*> stack;
01638     stack.push(root);

```

```

01639     while (!stack.empty())
01640     {
01641         NODE* c = stack.top();
01642         stack.pop();
01643
01644         if (c->data[0] == SYMBOL) {
01645             if (c->data[3] > 1) {
01646                 std::pair<nodeset::iterator, bool> suc = ID.insert(c);
01647                 if (suc.second) { // new
01648                     if (c->data[3] == 2)
01649                         numinstr++;
01650                     else
01651                         numinstr += (int)floor(log(c->data[3])/log(2.0)) + popcount(c->data[3]) - 1;
01652                 }
01653             }
01654         } else {
01655             if (c->data[0] != SNUMBER) {
01656                 // operator
01657                 std::pair<nodeset::iterator, bool> suc = ID.insert(c);
01658                 if (suc.second) {
01659                     stack.push(c->r);
01660                     stack.push(c->l);
01661
01662                     // ignore OPER_COMMA
01663                     if (c->data[0] == OPER_MUL || c->data[0] == OPER_ADD)
01664                         numinstr++;
01665                 }
01666             }
01667         }
01668     }
01669
01670     //MesPrint ("*** [%s] Stopping CSEE", thetime_str().c_str());
01671     M_free(root, "CSE tree");
01672
01673     return numinstr;
01674 }
01675
01676 /*
01677 #] count_operators_cse_topdown :
01678 #[ simulated_annealing :
01679 */
01680 vector<WORD> simulated_annealing() {
01681     float minT = AO.Optimize.saMinT.fval;
01682     float maxT = AO.Optimize.saMaxT.fval;
01683     float T = maxT;
01684     float coolrate = pow(minT / maxT, 1 / (float)AO.Optimize.saIter);
01685
01686     GETIDENTITY;
01687
01688     // create a valid state where FACTORSYMBOL/SEPARATESYMBOL remains first
01689     vector<WORD> state = occurrence_order(optimize_expr, false);
01690     int startindex = 0;
01691     if ((state.size() > 0 && state[0] == SEPARATESYMBOL) || (state.size() > 1 && state[1] ==
FACTORSYMBOL)) startindex++;
01692     if (state.size() > 1 && state[1] == FACTORSYMBOL) startindex++;
01693
01694     my_random_shuffle(BHEAD state.begin() + startindex, state.end()); // start from random scheme
01695
01696     vector<WORD> tree = Horner_tree(optimize_expr, state);
01697     int curscore = count_operators_cse_topdown(tree);
01698
01699     // clean poly_vars, that are allocated by Horner_tree
01700     AN.poly_num_vars = 0;
01701     M_free(AN.poly_vars, "poly_vars");
01702
01703     std::vector<WORD> best = state; // best state
01704     int bestscore = curscore;
01705
01706     if (startindex == (int)state.size() || (int)state.size() - startindex < 2) {
01707         return best;
01708     }
01709
01710     for (int o = 0; o < AO.Optimize.saIter; o++) {
01711         int inda = iranf(BHEAD state.size() - startindex) + startindex;
01712         int indb = iranf(BHEAD state.size() - startindex) + startindex;
01713
01714         if (inda == indb) {
01715             continue;
01716         }
01717
01718         swap(state[inda], state[indb]); // swap works best for Horner
01719
01720         vector<WORD> tree = Horner_tree(optimize_expr, state);
01721         int newscore = count_operators_cse_topdown(tree);
01722
01723         // clean poly_vars, that are allocated by Horner_tree
01724         AN.poly_num_vars = 0;

```

```

01725     M_free(AN.poly_vars,"poly_vars");
01726
01727     if (newscore <= curscore || 2.0 * wranf(BHEAD0) / (float)(UWORD)(-1) < exp((curscore -
newscore) / T)) {
01728         curscore = newscore;
01729
01730         if (curscore < bestscore) {
01731             bestscore = curscore;
01732             best = state;
01733         }
01734     } else {
01735         swap(state[inda], state[indb]);
01736     }
01737
01738 #ifdef DEBUG_SA
01739     MesPrint("Score at step %d: %d", o, curscore);
01740 #endif
01741     T *= coolrate;
01742 }
01743
01744 #ifdef DEBUG_SA
01745     MesPrint("Simulated annealing score: %d", bestscore);
01746 #endif
01747
01748     return best;
01749 }
01750
01751 /*
01752  #] simulated_annealing :
01753  #[ printpstree :
01754  */
01755
01756 /*
01757  // print MCTS tree with LaTeX/pstricks (for analysis)
01758  void printpstree_rec (tree_node x, string pre="") {
01759
01760      if (x.num_visits==1) {
01761          MesPrint("%s\\TR{%d}",pre.c_str(),x.var);
01762      }
01763      else {
01764          MesPrint("%s\\pstree%s{\\TR{%d}}{",pre.c_str(),
01765                  pre==" "?[nodesep=0, levelsep=40]:"",
01766                  x.var);
01767          for (int i=0; i<(int)x.childs.size(); i++)
01768              if (x.childs[i].num_visits>0)
01769                  printpstree_rec(x.childs[i], pre+" ");
01770          MesPrint("%s",pre.c_str());
01771      }
01772  }
01773
01774  void printpstree () {
01775      // draw tree with pstricks
01776      MesPrint ("\\documentclass{article}");
01777      MesPrint ("\\usepackage{pstricks,pst-node,pst-tree,graphicx}");
01778      MesPrint ("\\begin{document}");
01779      MesPrint ("\\scalebox{0.02}{");
01780      printpstree_rec(mcts_root," ");
01781      MesPrint ("}");
01782      MesPrint ("\\end{document}");
01783  }
01784  */
01785
01786 /*
01787  #] printpstree :
01788  #[ find_Horner_MCTS_expand_tree :
01789  */
01790
01791 /*
01822  #[ next_MCTS_scheme :
01823  */
01824
01825
01826  // find a Horner scheme to be used for the next simulation
01827  inline static void next_MCTS_scheme (PHEAD vector<WORD> *porder, vector<WORD> *pscheme,
vector<tree_node *> *ppath) {
01828
01829      vector<WORD> &order = *porder;
01830      vector<WORD> &schemev = *pscheme;
01831      vector<tree_node *> &path = *ppath;
01832      int depth = 0, nchild0;
01833      float slide_down_factor = 1.0;
01834
01835      order.clear();
01836      path.clear();
01837
01838      // MCTS step I: select
01839      tree_node *select = &mcts_root;
01840      path.push_back(select);

```

```

01841     nchild0 = select->childs.size();
01842     while (select->childs.size() > 0) {
01843         // add virtual loss
01844         select->num_visits++;
01845         select->sum_results+=mcts_expr_score;
01846
01847         //-----
01848         switch ( AO.Optimize.mctsdecaymode ) {
01849             case 1: // Based on http://arxiv.org/abs/arXiv:1312.0841
01850                 slide_down_factor = 1.0-(1.0*AT.optentimes)/(1.0*AO.Optimize.mctsnumexpand);
01851                 break;
01852             case 2: // This gives a bit more cleanup time at the end.
01853                 if ( 2*AT.optentimes < AO.Optimize.mctsnumexpand ) {
01854                     slide_down_factor = 1.0*(AO.Optimize.mctsnumexpand-2*AT.optentimes);
01855                     slide_down_factor /= 1.0*AO.Optimize.mctsnumexpand;
01856                 }
01857                 else {
01858                     slide_down_factor = 0.0001;
01859                 }
01860                 break;
01861             case 3: // depth dependent factor combined with case 1
01862                 float dd = 1.0-(1.0*depth)/(1.0*nchild0);
01863                 slide_down_factor = 1.0-(1.0*AT.optentimes)/(1.0*AO.Optimize.mctsnumexpand);
01864                 if ( dd <= 0.000001 ) slide_down_factor = 1.0;
01865                 else slide_down_factor /= dd;
01866                 if ( slide_down_factor > 1.0 ) slide_down_factor = 1.0;
01867                 break;
01868         }
01869         //-----
01870
01871         #ifdef DEBUG_MCTS
01872             MesPrint("select %d",select->var);
01873         #endif
01874
01875         // find most-promising node
01876         double best=0;
01877         tree_node *next=NULL;
01878         for (vector<tree_node>::iterator p=select->childs.begin(); p<select->childs.end(); p++) {
01879             double score;
01880             if (p->num_visits >= 1) {
01881
01882                 // there are results calculated, so select with the UCT formula
01883                 score = mcts_expr_score / (p->sum_results/p->num_visits) +
01884                     //-----
01885                     slide_down_factor *
01886                     //-----
01887                     2 * AO.Optimize.mctsconstant.fval * sqrt(2*log(select->num_visits) /
01888                         p->num_visits);
01889
01890                 #ifdef DEBUG_MCTS
01891                     printf("%d: %.2lf [x=%.2lf n=%d fin=%i]\n",p->var,score,mcts_expr_score /
01892                         (p->sum_results/p->num_visits),
01893                         p->num_visits,p->finished?1:0);
01894                     fflush(stdout);
01895                 #endif
01896             }
01897             else {
01898                 // no results yet, so select this node by setting score=infinite
01899                 score = 1e100;
01900             }
01901             #ifdef DEBUG_MCTS
01902                 printf("%d: inf\n",p->var); fflush(stdout);
01903             #endif
01904
01905             // update best candidate
01906             if (!p->finished && score>best) {
01907                 best=score;
01908                 next=&*p;
01909             }
01910
01911             // if no node is found, this node is finished
01912             if (next==NULL) {
01913                 select->finished=true;
01914                 break;
01915             }
01916
01917             // traverse down the tree
01918             select = next;
01919             path.push_back(select);
01920             order.push_back(select->var);
01921             depth++;
01922         }
01923
01924         // MCTS step II: expand
01925

```



```

01926 #ifdef DEBUG_MCTS
01927     MesPrint("expand %d",select->var);
01928 #endif
01929
01930     // variables used so far
01931     set<WORD> var_used;
01932
01933     for (int i=0; i<(int)order.size(); i++)
01934         var_used.insert(ABS(order[i])-1);
01935
01936     // if this a new node, create node and add children
01937     if (!select->finished && select->childs.size()==0) {
01938         tree_node new_node(select->var);
01939         int sign = (order.size() == 0) ? 1 : SGN(order.back());
01940         for (int i=0; i<(int)mcts_vars.size(); i++)
01941             if (!var_used.count(mcts_vars[i])) {
01942                 new_node.childs.push_back(tree_node(sign*(mcts_vars[i]+1)));
01943                 if (AO.Optimize.hornerdirection==O_FORWARDANDBACKWARD)
01944                     new_node.childs.push_back(tree_node(-sign*(mcts_vars[i]+1)));
01945             }
01946         my_random_shuffle(BHEAD new_node.childs.begin(), new_node.childs.end());
01947
01948         // here locking is necessary, since operator=(tree_node) is a
01949         // non-atomic operation (using pointers makes this lock obsolete)
01950         LOCK(optimize_lock);
01951         *select = new_node;
01952         UNLOCK(optimize_lock);
01953     }
01954     // set finished if necessary
01955     if (select->childs.size()==0)
01956         select->finished = true;
01957
01958     // add virtual loss of number of operators in original expression
01959     select->num_visits++;
01960     select->sum_results+=mcts_expr_score;
01961
01962     // MCTS step III: simulation
01963
01964     // create complete Horner scheme
01965     deque<WORD> scheme;
01966
01967     for (int i=0; i<(int)mcts_vars.size(); i++)
01968         if (!var_used.count(mcts_vars[i]))
01969             scheme.push_back(mcts_vars[i]);
01970     my_random_shuffle(BHEAD scheme.begin(), scheme.end());
01971
01972     for (int i=(int)order.size()-1; i>=0; i--) {
01973         if (order[i] > 0)
01974             scheme.push_front(order[i]-1);
01975         else
01976             scheme.push_back(-order[i]-1);
01977     }
01978
01979     // add FACTORSYMBOL/SEPARATESYMBOL is necessary
01980     if (mcts_factorized)
01981         scheme.push_front(FACTORSYMBOL);
01982     if (mcts_separated)
01983         scheme.push_front(SEPARATESYMBOL);
01984
01985     // Horner scheme as a vector
01986     schemev = vector<WORD>(scheme.begin(), scheme.end());
01987 }
01988
01989 /*
01990 #] next_MCTS_scheme :
01991 #[ try_MCTS_scheme :
01992 */
01993
01994 // count the number of operators in the given Horner scheme
01995 inline static void try_MCTS_scheme (PHEAD const vector<WORD> &scheme, int *pnum_oper) {
01996
01997     // do Horner, CSE and count the number of operators
01998     vector<WORD> tree = Horner_tree(optimize_expr, scheme);
01999     //vector<WORD> instr = generate_instructions(tree, true);
02000     //int num_oper = count_operators(instr);
02001     //int num_oper2 = count_operators_cse(tree);
02002     //int num_oper2 = count_operators_cse_topdown(tree);
02003     //MesPrint("%d %d", num_oper, num_oper2);
02004
02005     int num_oper = count_operators_cse_topdown(tree);
02006
02007     // clean poly_vars, that is allocated by Horner_tree
02008     AN.poly_num_vars = 0;
02009     M_free(AN.poly_vars,"poly_vars");
02010
02011     *pnum_oper = num_oper;

```

```

02013
02014 }
02015
02016 /*
02017     #] try_MCTS_scheme :
02018     #[ update_MCTS_scheme :
02019 */
02020
02021 // update the best score and the search tree
02022 inline static void update_MCTS_scheme (int num_oper, const vector<WORD> &scheme, vector<tree_node *>
    *ppath) {
02023
02024     vector<tree_node *> &path = *ppath;
02025
02026     // update the (global) list of best Horner scheme
02027     if ((int)mcts_best_schemes.size() < AO.Optimize.mctsnumkeep ||
02028         (--mcts_best_schemes.end())->first > num_oper) {
02029         // here locking is necessary, for otherwise best_schemes may
02030         // become corrupted; lock can be prevented if each thread keeps
02031         // track of it's own list and those lists are merged in the end,
02032         // but this seems not useful to implement
02033         LOCK(optimize_lock);
02034         mcts_best_schemes.insert(make_pair(num_oper, scheme));
02035         if ((int)mcts_best_schemes.size() > AO.Optimize.mctsnumkeep)
02036             mcts_best_schemes.erase(--mcts_best_schemes.end());
02037         UNLOCK(optimize_lock);
02038     }
02039
02040     // MCTS step IV: backpropagate
02041
02042     // add number of operator and subtract mcts_expr_score, which
02043     // behaves as a "virtual loss"
02044     for (vector<tree_node *>::iterator p=path.begin(); p<path.end(); p++)
02045         (*p)->sum_results += num_oper - mcts_expr_score;
02046
02047 }
02048
02049 /*
02050     #] update_MCTS_scheme :
02051 */
02052
02053 void find_Horner_MCTS_expand_tree () {
02054
02055     #ifdef DEBUG
02056         MesPrint ("*** [%s, w=%w] CALL: find_Horner_MCTS_expand_tree", thetime_str().c_str());
02057     #endif
02058
02059     GETIDENTITY;
02060
02061     // the order for the Horner scheme up to the selected node, with signs
02062     // indicating forward or backward.
02063     vector<WORD> order;
02064
02065     // complete Horner scheme
02066     vector<WORD> scheme;
02067
02068     // path to the selected node
02069     vector<tree_node *> path;
02070
02071     // the number of operations obtained by the simulation
02072     int num_oper;
02073
02074     next_MCTS_scheme(BHEAD &order, &scheme, &path);
02075     try_MCTS_scheme(BHEAD scheme, &num_oper);
02076     #ifdef DEBUG_MCTS
02077         // Actually "order" is needed only for this debug output.
02078         MesPrint ("[%a] -> [%a] -> %d", order.size(), &order[0], scheme.size(), &scheme[0], num_oper);
02079     #endif
02080     update_MCTS_scheme(num_oper, scheme, &path);
02081
02082     #ifdef DEBUG
02083         MesPrint ("*** [%s, w=%w] DONE: find_Horner_MCTS_expand_tree(%a-> %d)",
02084             thetime_str().c_str(), scheme.size(), &scheme[0], num_oper);
02085     #endif
02086 }
02087
02088
02089 /*
02090     #] find_Horner_MCTS_expand_tree :
02091     #[ PF_find_Horner_MCTS_expand_tree :
02092 */
02093 #ifdef WITHMPI
02094
02095 // To remember which task is assigned to each slave. A task is represented by
02096 // a pair of a Horner scheme and the selected path for the scheme.
02097 // The index range is from 1 to PF.numtasks-1.
02098 vector<pair<vector<WORD>, vector<tree_node *>> > > PF_opt_MCTS_tasks;

```

```

02099
02100 // Initialization.
02101 void PF_find_Horner_MCTS_expand_tree_master_init () {
02102
02103     PF_opt_MCTS_tasks.resize(PF.numtasks);
02104     for (int i = 1; i < PF.numtasks; i++) {
02105         pair<vector<WORD>, vector<tree_node *> > &p = PF_opt_MCTS_tasks[i];
02106         p.first.clear();
02107         p.second.clear();
02108     }
02109
02110 }
02111
02112 // Wait for an idle slave and return the process number.
02113 int PF_find_Horner_MCTS_expand_tree_master_next () {
02114
02115     // Find an idle slave.
02116     int next;
02117     PF_Receive(PF_ANY_SOURCE, PF_OPT_MCTS_MSGTAG, &next, NULL);
02118
02119     // Check if the slave had a task.
02120     pair<vector<WORD>, vector<tree_node *> > &p = PF_opt_MCTS_tasks[next];
02121     if (!p.first.empty()) {
02122         // If so, update the result.
02123         int num_oper;
02124         PF_Unpack(&num_oper, 1, PF_INT);
02125         update_MCTS_scheme(num_oper, p.first, &p.second);
02126
02127         // Clear the task.
02128         p.first.clear();
02129         p.second.clear();
02130     }
02131
02132     return next;
02133
02134 }
02135
02136 // The main function on the master.
02137 void PF_find_Horner_MCTS_expand_tree_master () {
02138
02139     #ifdef DEBUG
02140         MesPrint ("*** [%s, w=%w] CALL: PF_find_Horner_MCTS_expand_tree_master", thetime_str().c_str());
02141     #endif
02142
02143     vector<WORD> order;
02144     vector<WORD> scheme;
02145     vector<tree_node *> path;
02146
02147     next_MCTS_scheme(BHEAD &order, &scheme, &path);
02148
02149     // Find an idle slave.
02150     int next = PF_find_Horner_MCTS_expand_tree_master_next();
02151
02152     // Send a new task to the slave.
02153     PF_PrepareLongSinglePack();
02154     int len = scheme.size();
02155     PF_LongSinglePack(&len, 1, PF_INT);
02156     PF_LongSinglePack(&scheme[0], len, PF_WORD);
02157     PF_LongSingleSend(next, PF_OPT_MCTS_MSGTAG);
02158
02159     // Remember the task.
02160     pair<vector<WORD>, vector<tree_node *> > &p = PF_opt_MCTS_tasks[next];
02161     p.first = scheme;
02162     p.second = path;
02163
02164     #ifdef DEBUG
02165         MesPrint ("*** [%s, w=%w] DONE: PF_find_Horner_MCTS_expand_tree_master", thetime_str().c_str());
02166     #endif
02167
02168 }
02169
02170 // Wait for all the slaves to finish their tasks.
02171 void PF_find_Horner_MCTS_expand_tree_master_wait () {
02172
02173     #ifdef DEBUG
02174         MesPrint ("*** [%s, w=%w] CALL: PF_find_Horner_MCTS_expand_tree_master_wait",
02175             thetime_str().c_str());
02176     #endif
02177
02178     // Wait for all the slaves.
02179     for (int i = 1; i < PF.numtasks; i++) {
02180         int next = PF_find_Horner_MCTS_expand_tree_master_next();
02181         // Send a null task.
02182         PF_PrepareLongSinglePack();
02183         int len = 0;
02184         PF_LongSinglePack(&len, 1, PF_INT);
02185         PF_LongSingleSend(next, PF_OPT_MCTS_MSGTAG);
02186     }
02187 }

```

```

02185     }
02186
02187 #ifdef DEBUG
02188     MesPrint ("*** [%s, w=%w] DONE: PF_find_Horner_MCTS_expand_tree_master_wait",
02189             thetime_str().c_str());
02189 #endif
02190
02191 }
02192
02193 // The main function on the slaves.
02194 void PF_find_Horner_MCTS_expand_tree_slave () {
02195
02196 #ifdef DEBUG
02197     MesPrint ("*** [%s, w=%w] CALL: PF_find_Horner_MCTS_expand_tree_slave", thetime_str().c_str());
02198 #endif
02199
02200     vector<WORD> scheme;
02201
02202     {
02203         // Send the first message to the master, which indicates I am idle.
02204         PF_PreparePack();
02205         int dummy = 0;
02206         PF_Pack(&dummy, 1, PF_INT);
02207         PF_Send(MASTER, PF_OPT_MCTS_MSGTAG);
02208     }
02209
02210     for (;;) {
02211         // Get a task from the master.
02212         PF_LongSingleReceive(MASTER, PF_OPT_MCTS_MSGTAG, NULL, NULL);
02213
02214         // Length of the task.
02215         int len;
02216         PF_LongSingleUnpack(&len, 1, PF_INT);
02217
02218         // No task remains.
02219         if (len == 0) break;
02220
02221         // Perform the given task.
02222         scheme.resize(len);
02223         PF_LongSingleUnpack(&scheme[0], len, PF_WORD);
02224         int num_oper;
02225         try_MCTS_scheme(scheme, &num_oper);
02226
02227         // Send the result to the master.
02228         PF_PreparePack();
02229         PF_Pack(&num_oper, 1, PF_INT);
02230         PF_Send(MASTER, PF_OPT_MCTS_MSGTAG);
02231     }
02232
02233 #ifdef DEBUG
02234     MesPrint ("*** [%s, w=%w] DONE: PF_find_Horner_MCTS_expand_tree_slave", thetime_str().c_str());
02235 #endif
02236 }
02237
02238 #endif
02239
02240 /*
02241 #] PF_find_Horner_MCTS_expand_tree :
02242 #[ find_Horner_MCTS :
02243 */
02244
02253 //vector<vector<WORD> > find_Horner_MCTS () {
02254 void find_Horner_MCTS () {
02255
02256 #ifdef WITHMPI
02257     if (PF.me != MASTER) {
02258         if (PF.numtasks <= 1) return;
02259         PF_find_Horner_MCTS_expand_tree_slave();
02260         return;
02261     }
02262 #endif
02263
02264 #ifdef DEBUG
02265     MesPrint ("*** [%s, w=%w] CALL: find_Horner_MCTS", thetime_str().c_str());
02266 #endif
02267
02268     GETIDENTITY;
02269
02270     LONG start_time = TimeWallClock(1);
02271
02272     // initialize the used global variables
02273     mcts_expr_score = count_operators(optimize_expr);
02274     mcts_root = tree_node();
02275
02276     // extract all symbols from the expression
02277     set<WORD> var_set;
02278     for (WORD *t=optimize_expr; *t!=0; t+=*t)

```

```

02279         if (t[1] == SYMBOL)
02280             for (int i=3; i<t[2]; i+=2)
02281                 var_set.insert(t[i]);
02282
02283         // check for factorized/separated expression and make sure that
02284         // FACTORSYMBOL/SEPARATESYMBOL isn't included in the MCTS
02285         mcts_factorized = var_set.count(FACTORSYMBOL);
02286         if (mcts_factorized) var_set.erase(FACTORSYMBOL);
02287         mcts_separated = var_set.count(SEPARATESYMBOL);
02288         if (mcts_separated) var_set.erase(SEPARATESYMBOL);
02289
02290         mcts_vars = vector<WORD>(var_set.begin(), var_set.end());
02291         optimize_num_vars = (int)mcts_vars.size();
02292         // initialize MCTS tree root
02293         for (int i=0; i<(int)mcts_vars.size(); i++) {
02294             if (AO.Optimize.hornerdirection != O_BACKWARD)
02295                 mcts_root.childs.push_back(tree_node(+ (mcts_vars[i]+1)));
02296             if (AO.Optimize.hornerdirection != O_FORWARD)
02297                 mcts_root.childs.push_back(tree_node(- (mcts_vars[i]+1)));
02298         }
02299         my_random_shuffle(BHEAD mcts_root.childs.begin(), mcts_root.childs.end());
02300
02301         #if defined(WITHMPI)
02302         PF_find_Horner_MCTS_expand_tree_master_init();
02303         #endif
02304
02305         // initialize a potential variable mctsconstant scheme.
02306         AT.optentimes = 0;
02307
02308         // call expand_tree until it is called "mctsnunexpand" times, the
02309         // time limit is reached or the tree is fully finished
02310         for (int times=0; times<AO.Optimize.mctsnunexpand && !mcts_root.finished &&
02311             (AO.Optimize.mctsttimelimit==0 || (TimeWallClock(1)-start_time)/100 <
02312             AO.Optimize.mctsttimelimit); times++) {
02313             AT.optentimes = times;
02314             // call expand_tree routine depending on threading mode
02315             #if defined(WITHPTHREADS)
02316                 if (AM.totalnumberofthreads > 1)
02317                     find_Horner_MCTS_expand_tree_threaded();
02318             else
02319             #elif defined(WITHMPI)
02320                 if (PF.numtasks > 1)
02321                     PF_find_Horner_MCTS_expand_tree_master();
02322             else
02323             #endif
02324                 find_Horner_MCTS_expand_tree();
02325         }
02326
02327         // if TForm or ParForm, wait for everyone to finish
02328         #ifdef WITHPTHREADS
02329             MasterWaitAll();
02330         #endif
02331         #ifdef WITHMPI
02332             PF_find_Horner_MCTS_expand_tree_master_wait();
02333         #endif
02334         #ifdef DEBUG
02335             MesPrint ("*** [%s, w=%w] DONE: find_Horner_MCTS", thetime_str().c_str());
02336         #endif
02337     }
02338 }
02339
02340 /*
02341     #] find_Horner_MCTS :
02342     #[ merge_operators :
02343 */
02344
02402 vector<WORD> merge_operators (const vector<WORD> &all_instr, bool move_coeff) {
02403
02404     #ifdef DEBUG_MORE
02405         MesPrint ("*** [%s, w=%w] CALL: merge_operators", thetime_str().c_str());
02406     #endif
02407
02408     // get starting positions of instructions
02409     vector<const WORD *> instr;
02410     const WORD *tbegin = &all_instr.begin();
02411     const WORD *tend = tbegin+all_instr.size();
02412     // copy all instructions to temp space. There will be n of them in instr.
02413     for (const WORD *t=tbegin; t!=tend; t+=*(t+2)) {
02414         instr.push_back(t);
02415     }
02416     int n = instr.size();
02417
02418     // find parents and number of parents of instructions
02419     vector<int> par(n, numpar(n,0));
02420     for (int i=0; i<n; i++) par[i]=i;
02421

```

```

02422     for (int i=0; i<n; i++) {
02423         for (const WORD *t=instr[i]+OPTHEAD; *t!=0; t+=*t) {
02424             if ( (*t+1)==EXTRASymbol && *t!=1+ABS(*(t+*t-1)) ) {
02425                 // extra symbol t[3] is referred to in instr i.
02426                 par[*t+3]=i;
02427                 numpar[*t+3]++;
02428
02429                 // if coefficient isn't +/-1 or power > 1, increase numpar,
02430                 // so that this is not merged
02431                 if (*(t+*t-3)!=1 || *(t+*t-2)!=1 || ABS(*(t+*t-1))!=3) numpar[*t+3]++;
02432                 if (*(t+4)>1) numpar[*t+3]++;
02433             }
02434         }
02435     }
02436     // determine which instructions to merge
02437     stack<int> s;
02438     s.push(n-1);
02439     vector<bool> vis(n,false);
02440
02441     while (!s.empty()) {
02442
02443         int i=s.top(); s.pop();
02444         if (vis[i]) continue;
02445         vis[i]=true;
02446
02447         for (const WORD *t=instr[i]+OPTHEAD; *t!=0; t+=*t)
02448             if ( (*t+1)==EXTRASymbol && *t!=1+ABS(*(t+*t-1)) )
02449                 s.push(*t+3);
02450
02451         // condition: one parent and equal operator as parent
02452         if (numpar[i]==1 && *(instr[i+1])==*(instr[par[i]+1]))
02453             par[i] = par[par[i]]; // The expr into which we subst par[i] to get i
02454         else
02455             par[i] = i;
02456     }
02457
02458     // merge instructions into new instructions
02459     vector<WORD> newinstr;
02460
02461     // stack of new expressions, all 0-indexed
02462     stack<WORD> new_expr;
02463     new_expr.push(n-1);
02464     vis = vector<bool>(n,false);
02465
02466     // skip empty equations (might be introduced by greedy optimizations)
02467     vector<bool> skip(n,false), skipcoeff(n,false);
02468     for (int i=0; i<n; i++)
02469         if (*(instr[i]+OPTHEAD) == 0) skip[i]=skipcoeff[i]=true;
02470
02471     // for renumbering merged parents
02472     vector<int> renum_par(n);
02473     for (int i=0; i<n; i++)
02474         renum_par[i]=i;
02475
02476     while (!new_expr.empty()) {
02477         int x = new_expr.top(); new_expr.pop();
02478         if (vis[x]) continue;
02479         vis[x] = true;
02480
02481         // find all instructions with parent=x and copy their arguments
02482         // into a new expression
02483         bool first_copy=true;
02484         int lenidx = newinstr.size()+2;
02485
02486         // 1-indexed, since signs may occur
02487         stack<WORD> this_expr;
02488         this_expr.push(x+1);
02489
02490         while (!this_expr.empty()) {
02491             // pop from stack, determine expr.nr and sign
02492             int i = this_expr.top(); this_expr.pop();
02493             int sign = SGN(i);
02494             i = ABS(i)-1;
02495             for (const WORD *t=instr[i]+OPTHEAD; *t!=0; t+=*t) { // terms in i
02496                 // don't copy a term if:
02497                 // (1) skip=true, since then it's merged into the parent
02498                 // (2) extrasymbol with parent=x, because its children should be copied
02499                 // (3) coefficient with skipcoeff=true, since it's already copied
02500                 bool copy = !skip[i];
02501                 if (*t!=1+ABS(*(t+*t-1)) && *(t+1)==EXTRASymbol) {
02502                     if (par[*t+3] == x) {
02503                         // parent of term refers to x. we push it with its sign if no skip is true
02504                         // and the sign of the expr.
02505                         this_expr.push(sign * (skip[i]||skipcoeff[i] ? 1 : SGN(*(t+*t-1))) *
(1+*(t+3)));
02506                     }
02507                     if (*(instr[i+1]) == OPER_MUL) sign=1;
02508                     copy=false;

```

```

02508         }
02509     else {
02510         new_expr.push(*(t+3));
02511     }
02512 }
02513
02514 if (*t == 1+ABS(*(t+*t-1)) && skipcoeff[i]) {
02515     copy=false;
02516 }
02517
02518 if (copy) {
02519     // first term, so add header
02520     if (first_copy) {
02521         newinstr.push_back(renum_par[x]); // expr.nr.
02522         newinstr.push_back(*(instr[x]+1)); // operator
02523         newinstr.push_back(3); // length OPTHEAD?
02524         first_copy=false;
02525     }
02526
02527     // copy term and adjust sign
02528     int thislenidx = newinstr.size();
02529     newinstr.insert(newinstr.end(), t, t+*t); // Put the whole term in newinstr
02530     newinstr.back() *= sign;
02531     if (*(instr[i]+1) == OPER_MUL) sign=1;
02532     newinstr[lenidx] += *t;
02533
02534     // check for moving coefficients up
02535     // necessary condition: MUL-expression with 1 parent
02536     if (move_coeff && *t!=1+ABS(*(t+*t-1)) && *(instr[i]+1)!=OPER_COMMA &&
02537         *(t+1)==EXTRASYNBOL && numpar[*(t+3)]=1 && *(instr[*(t+3)+1]==OPER_MUL)
02538 {
02539
02540     // coefficient is always the first term (that's how Horner+generate works)
02541     const WORD *t1 = instr[*(t+3)]+OPTHEAD;
02542     const WORD *t2 = t1+*t1;
02543
02544     if (*t1 == 1+ABS(*(t1+*t1-1))) {
02545         // t1 pointer to a coefficient, so move it
02546
02547         // remove old coefficient of 1
02548         WORD *t3 = &newinstr.end(); //
02549         int sign2 = SGN(t3[-1]); //
02550         newinstr.erase(newinstr.end()-3, newinstr.end());
02551         // count number of arguments; iff it is 2 move the (extra)symbol too
02552         int numargs=0;
02553         for (const WORD *tt=t1; *tt!=0; tt+=*tt) {
02554             numargs++;
02555         }
02556         if (numargs==2 && *(t2+4)==1) {
02557             // replace (extra)symbol
02558             newinstr[newinstr.size()-4] = *(t2+1);
02559             newinstr[newinstr.size()-3] = *(t2+2);
02560             newinstr[newinstr.size()-2] = *(t2+3);
02561             newinstr[newinstr.size()-1] = *(t2+4);
02562             sign2 *= SGN(*(t2+*t2-1)); // was t2[7]
02563
02564             // ignore this expression from now on
02565             skip[*(t+3)]=true;
02566             if (*(t2+1)==EXTRASYNBOL)
02567                 renum_par[*(t+3)] = *(t2+3);
02568         }
02569         else {
02570             // otherwise, ignore coefficient from now on
02571             // we need to collect the signs of the terms
02572             // first and set them to one. This was forgotten
02573             // before. Gave occasional errors.
02574             if ( numargs > 2 || ( numargs == 2 && t2[4] > 1 ) ) {
02575                 for (WORD *tt=(WORD *)t2; *tt!=0; tt+=*tt) {
02576                     if ( tt[*tt-1] < 0 ) {
02577                         tt[*tt-1] = -tt[*tt-1];
02578                         sign2 = -sign2;
02579                     }
02580                 }
02581             }
02582             skipcoeff[*(t+3)]=true;
02583         }
02584
02585         // add new coefficient
02586         newinstr.insert(newinstr.end(), t1+1, t1+*t1);
02587         newinstr.back() *= sign2;
02588         newinstr[thislenidx] += ABS(newinstr.back()) - 3;
02589         newinstr[lenidx] += ABS(newinstr.back()) - 3;
02590     }
02591 }
02592 }
02593 }

```

```

02594
02595     // if something has been copied, add trailing zero
02596     if (!first_copy) {
02597         newinstr.push_back(0);
02598         newinstr[lenidx]++;
02599     }
02600 }
02601
02602 // renumber the expressions to 0,1,2,...; only keep expressions with
02603 // skip=false which are their own parent after a renumbering in case
02604 // of moved coefficients
02605
02606 // find renumber scheme
02607 vector<int> renum(n,-1);
02608 int next=0;
02609 for (int i=0; i<n; i++)
02610     if (!skip[i] && renum_par[par[i]]==i) renum[renum_par[i]]=next++;
02611
02612 // find new instruction index
02613 tbegin = &*newinstr.begin();
02614 tend = tbegin+newinstr.size();
02615 for (const WORD *t=tbegin; t!=tend; t+=*(t+2))
02616     instr[renum[*t]] = t;
02617
02618 // renumbering expressions and sort them lexicographically (in
02619 // new_instr they are in the preorder of the expression tree)
02620 vector<WORD> sortinstr;
02621 for (int i=0; i<next; i++) {
02622     int idx = sortinstr.size();
02623     sortinstr.insert(sortinstr.end(), instr[i], instr[i]+(instr[i]+2));
02624
02625     sortinstr[idx] = renum[sortinstr[idx]];
02626
02627     // renumber content of an expression
02628     for (WORD *t2=&sortinstr[idx]+3; *t2!=0; t2+=*t2)
02629         if ((*t2!=1+ABS(*t2+*t2-1)) && *(t2+1)==EXTRASYMBOL)
02630             *(t2+3) = renum[*t2+3];
02631 }
02632
02633 #ifdef DEBUG_MORE
02634     MesPrint ("*** [%s, w=%w] DONE: merge_operators", thetime_str().c_str());
02635 #endif
02636
02637     return sortinstr;
02638 }
02639
02640 /*
02641     #] merge_operators :
02642     #[ class Optimization :
02643 */
02644
02645 class optimization {
02646 public:
02647     int type, arg1, arg2, improve;
02648     vector<WORD> coeff;
02649     vector<int> eqnidxs;
02650
02651     bool operator< (const optimization &a) const {
02652         if (arg1 != a.arg1) return arg1 < a.arg1;
02653         if (arg2 != a.arg2) return arg2 < a.arg2;
02654         if (type != a.type) return type < a.type;
02655         return coeff < a.coeff;
02656     }
02657 };
02658
02659 /*
02660     #] class Optimization :
02661     #[ find_optimizations :
02662 */
02663
02664 vector<optimization> find_optimizations (const vector<WORD> &instr) {
02665
02666     #ifdef DEBUG_GREEDY
02667         MesPrint ("*** [%s, w=%w] CALL: find_optimizations", thetime_str().c_str());
02668     #endif
02669
02670     // #[ Startup :
02671     // the resulting vector of optimizations
02672     vector<optimization> res;
02673
02674     // a map to count the improvement of an optimization; the
02675     // improvement is stored as a vector<int> with equation numbers
02676     map<optimization, vector<int> > cnt;
02677
02678     // a map to identify coefficients
02679     map<vector<int>,int> idx_coeff;
02680
02681 }

```



```

02714     const WORD *ebegin = &*instr.begin();
02715     const WORD *eend = ebegin+instr.size();
02716
02717     for (int optim_type=0; optim_type<=4; optim_type++) {
02718
02719         cnt.clear();
02720         idx_coeff.clear();
02721
02722         optimization optim;
02723         optim.type = optim_type;
02724         // #] Startup :
02725
02726         // #[ type 0 : find optimizations of the form z=x^n (optim.type==0)
02727         if (optim_type == 0) {
02728             for (const WORD *e=ebegin; e!=eend; e+=*(e+2)) {
02729                 if (*(e+1) != OPER_MUL) continue;
02730                 for (const WORD *t=e+3; *t!=0; t+=*t) {
02731                     if (*t == ABS(*(t+*t-1))+1) continue;
02732                     if (*(t+4) > 1) {
02733                         optim.arg1 = (*(t+1)==SYMBOL ? 1 : -1) * (*(t+3) + 1);
02734                         optim.arg2 = *(t+4);
02735                         cnt[optim].push_back(e-ebegin);
02736                     }
02737                 }
02738             }
02739         }
02740         // #] type 0 :
02741         // #[ type 1 : find optimizations of the form z=x*y (optim.type==1)
02742         if (optim_type == 1) {
02743             for (const WORD *e=ebegin; e!=eend; e+=*(e+2)) {
02744                 if (*(e+1) != OPER_MUL) continue;
02745
02746                 for (const WORD *t1=e+3; *t1!=0; t1+=*t1) {
02747                     if (*t1 == ABS(*(t1+*t1-1))+1) continue;
02748                     int x1 = (*(t1+1)==SYMBOL ? 1 : -1) * (*(t1+3) + 1);
02749
02750                     for (const WORD *t2=t1+*t1; *t2!=0; t2+=*t2) {
02751                         if (*t2 == ABS(*(t2+*t2-1))+1) continue;
02752                         int x2 = (*(t2+1)==SYMBOL ? 1 : -1) * (*(t2+3) + 1);
02753
02754                         if (*(t1+4) == *(t2+4)) {
02755                             optim.arg1 = x1;
02756                             optim.arg2 = x2;
02757                             if (optim.arg1 > optim.arg2)
02758                                 swap(optim.arg1, optim.arg2);
02759
02760                             if (*(t1+4) == 1)
02761                                 cnt[optim].push_back(e-ebegin);
02762                             else {
02763                                 // E=x^n*y^n -> z=x*y; E=z^n is double improvement
02764                                 cnt[optim].push_back(e-ebegin);
02765                                 cnt[optim].push_back(e-ebegin);
02766                             }
02767                         }
02768                     }
02769                 }
02770             }
02771         }
02772         // #] type 1 :
02773         // #[ type 2 : find optimizations of the form z=c*x (optim.type==2)
02774         if (optim_type == 2) {
02775             for (const WORD *e=ebegin; e!=eend; e+=*(e+2)) {
02776
02777                 if (*(e+1) == OPER_ADD) {
02778                     // in ADD-equation
02779
02780                     for (const WORD *t=e+3; *t!=0; t+=*t) {
02781                         if (*t == ABS(*(t+*t-1))+1) continue;
02782
02783                         if (*(t+4)==1) {
02784                             if (ABS(*(t+*t-1))==3 && *(t+*t-2)==1 && *(t+*t-3)==1) continue;
02785
02786                             optim.coeff = vector<WORD>(t+*t-ABS(*(t+*t-1)), t+*t);
02787                             optim.coeff.back() = ABS(optim.coeff.back());
02788
02789                             optim.arg1 = (*(t+1)==SYMBOL ? 1 : -1) * (*(t+3) + 1);
02790                             optim.arg2 = 0;
02791
02792                             cnt[optim].push_back(e-ebegin);
02793                         }
02794                     }
02795                 }
02796                 else if (*(e+1) == OPER_MUL) {
02797                     // in MUL-equation
02798                     optim.coeff.clear();
02799
02800                     for (const WORD *t=e+3; *t!=0; t+=*t)

```

```

02801         if (*t == ABS(*t+*t-1))+1) {
02802             if (ABS(*t+*t-1))==3 && *t+*t-2==1 && *t+*t-3==1) continue;
02803             optim.coeff = vector<WORD>(t+*t-ABS(*t+*t-1)), t+*t);
02804             optim.coeff.back() = ABS(optim.coeff.back());
02805         }
02806
02807         if (!optim.coeff.empty())
02808             for (const WORD *t=e+3; *t!=0; t+=*t) {
02809                 if (*t == ABS(*t+*t-1))+1) continue;
02810                 if (*t+4) != 1) continue;
02811                 optim.arg1 = (*t+1)==SYMBOL ? 1 : -1) * (*t+3) + 1);
02812                 optim.arg2 = 0;
02813                 cnt[optim].push_back(e-ebegin);
02814             }
02815         }
02816     }
02817 }
02818 // #] type 2 :
02819 // #[ type 3 : find optimizations of the form z=x+c (optim.type==3)
02820 if (optim_type == 3) {
02821     for (const WORD *e=ebegin; e!=eend; e+=*(e+2)) {
02822
02823         if (*e+1) != OPER_ADD) continue;
02824
02825         optim.coeff.clear();
02826
02827         for (const WORD *t=e+3; *t!=0; t+=*t)
02828             if (*t == ABS(*t+*t-1))+1) {
02829                 optim.coeff = vector<WORD>(t+*t-ABS(*t+*t-1)), t+*t);
02830             }
02831
02832         if (!optim.coeff.empty()) {
02833             for (const WORD *t=e+3; *t!=0; t+=*t) {
02834                 if (*t == ABS(*t+*t-1))+1) continue;
02835                 if (ABS(*t+*t-1))!=3 || *t+*t-2!=1 || *t+*t-3!=1) continue;
02836                 if (*t+*t-1)==-3) optim.coeff.back() *= -1;
02837
02838                 optim.arg1 = (*t+1)==SYMBOL ? 1 : -1) * (*t+3) + 1);
02839                 optim.arg2 = 0;
02840                 cnt[optim].push_back(e-ebegin);
02841                 if (*t+*t-1)==-3) optim.coeff.back() *= -1;
02842             }
02843         }
02844     }
02845 }
02846 // #] type 3 :
02847 // #[ type 4,5 : find optimizations of the form z=x+y or z=x-y (optim.type==4 or 5)
02848 if (optim_type == 4) {
02849     for (const WORD *e=ebegin; e!=eend; e+=*(e+2)) {
02850         if (*e+1) != OPER_ADD) continue;
02851
02852         for (const WORD *t1=e+3; *t1!=0; t1+=*t1) {
02853             if (*t1 == ABS(*t1+*t1-1))+1) continue;
02854             int x1 = (*t1+1)==SYMBOL ? 1 : -1) * (*t1+3) + 1);
02855
02856             for (const WORD *t2=t1+*t1; *t2!=0; t2+=*t2) {
02857                 if (*t2 == ABS(*t2+*t2-1))+1) continue;
02858                 int x2 = (*t2+1)==SYMBOL ? 1 : -1) * (*t2+3) + 1);
02859
02860                 int sign1 = SGN(*t1+*t1-1));
02861                 int sign2 = SGN(*t2+*t2-1));
02862
02863                 if (BigLong((UWORD *)t1+5, ABS(*t1+*t1-1))-1, (UWORD *)t2+5,
02864                     ABS(*t2+*t2-1))-1) == 0) {
02865
02866                     optim.type = (sign1 * sign2 == 1 ? 4 : 5); // optimization type
02867                     optim.arg1 = x1;
02868                     optim.arg2 = x2;
02869                     if (optim.arg1 > optim.arg2) {
02870                         swap(optim.arg1, optim.arg2);
02871                     }
02872
02873                     if (ABS(*t1+*t1-1))==3 && *t1+*t1-2==1 && *t1+*t1-3==1)
02874                         cnt[optim].push_back(e-ebegin);
02875                     else {
02876                         // E=2x+2y -> z=x+y; E=2z is improvement bby itself
02877                         cnt[optim].push_back(e-ebegin);
02878                         cnt[optim].push_back(e-ebegin);
02879                     }
02880                 }
02881             }
02882         }
02883     }
02884 // #] type 4,5 :
02885 // #[ add :
02886

```

```

02887         // add optimizations with positive improvement to the result
02888         for (map<optimization, vector<int> >::iterator i=cnt.begin(); i!=cnt.end(); i++) {
02889             int improve = i->second.size() - 1;
02890             if (improve > 0) {
02891                 res.push_back(i->first);
02892                 res.back().improve = improve;
02893                 res.back().eqnidxs = i->second;
02894             }
02895             // remove duplicates, that were add to get the correct improvement
02896             res.back().eqnidxs.erase(unique(res.back().eqnidxs.begin(), res.back().eqnidxs.end()),
res.back().eqnidxs.end());
02897         }
02898     }
02899 }
02900 // #] add :
02901
02902 #ifdef DEBUG_GREEDY
02903     MesPrint ("*** [%s, w=%w] DONE: find_optimizations", thetime_str().c_str());
02904 #endif
02905
02906     return res;
02907 }
02908
02909 /*
02910     #] find_optimizations :
02911     #[ do_optimization :
02912 */
02913
02930 bool do_optimization (const optimization optim, vector<WORD> &instr, int newid) {
02931
02932     // #[ Debug code :
02933     #ifdef DEBUG_GREEDY
02934         if (optim.type==0)
02935             MesPrint ("*** [%s, w=%w] CALL: do_optimization(improve=%d, %c%d^%d)",
thetime_str().c_str(), optim.improve,
optim.arg1>0?'x':'Z', ABS(optim.arg1)-1, optim.arg2);
02936         else if (optim.type==1 || optim.type==4)
02937             MesPrint ("*** [%s, w=%w] CALL: do_optimization(improve=%d, %c%d%c%c%d)",
thetime_str().c_str(), optim.improve,
optim.arg1>0?'x':'Z', ABS(optim.arg1)-1,
optim.type==1 ? '+' : optim.type==4 ? '+' : '-',
optim.arg2>0?'x':'Z', ABS(optim.arg2)-1);
02938         else {
02939             WORD n = optim.coeff.back()/2;
02940             UBYTE num[BITSINWORD*ABS(n)], den[BITSINWORD*ABS(n)];
02941             PrtLong((UWORD *)&optim.coeff[0], n, num);
02942             PrtLong((UWORD *)&optim.coeff[ABS(n)], ABS(n), den);
02943             MesPrint ("*** [%s, w=%w] CALL: do_optimization(improve=%d, %c%d%c%s/%s)",
thetime_str().c_str(), optim.improve,
optim.arg1>0?'x':'Z', ABS(optim.arg1)-1,
optim.type==2 ? '+' : '+' , num, den);
02944         }
02945     #endif
02946     // #] Debug code :
02947
02948     bool substituted = false;
02949     WORD *ebegin = &instr.begin();
02950
02951     // #[ type 0 : substitution of the form z=x^n (optim.type==0)
02952     if (optim.type == 0) {
02953
02954         int vartypex = optim.arg1>0 ? SYMBOL : EXTRASYMBOL;
02955         int varnumx = ABS(optim.arg1) - 1;
02956         int n = optim.arg2;
02957
02958         for (int i=0; i<(int)optim.eqnidxs.size(); i++) {
02959             WORD *e = ebegin + optim.eqnidxs[i];
02960             if (*(e+1) != OPER_MUL) continue;
02961
02962             // scan through equation
02963             for (WORD *t=e+3; *t!=0; t+=*t) {
02964                 if (*t == ABS(*(t+*t-1))+1) continue;
02965                 if (*(t+1)==vartypex &&
*(t+3)==varnumx &&
*(t+4) % n == 0) {
02966
02967                     // substitute
02968                     *(t+1) = EXTRASYMBOL;
02969                     *(t+3) = newid;
02970                     *(t+4) /= n;
02971
02972                     substituted = true;
02973                 }
02974             }
02975         }
02976     }
02977
02978     if (!substituted) {

```

```

02989 #ifdef DEBUG_GREEDY
02990     MesPrint ("*** [%s, w=%w] DONE: do_optimization : res=false", thetime_str().c_str(),
optim.improve);
02991 #endif
02992     return false;
02993 }
02994
02995 // add extra equation (Tnew = x^n)
02996 instr.push_back(newid); // eqn.nr
02997 instr.push_back(OPER_MUL); // operator
02998 instr.push_back(12); // total length
02999 instr.push_back(8); // term length
03000 instr.push_back(vartypex); // (extra)symbol
03001 instr.push_back(4); // symbol length
03002 instr.push_back(varnumx); // symbol id
03003 instr.push_back(n); // power
03004 instr.push_back(1);
03005 instr.push_back(1); // coefficient 1
03006 instr.push_back(3);
03007 instr.push_back(0); // trailing 0
03008 }
03009 // #] type 0 :
03010 // #[ type 1 : substitution of the form z=x*y (optim.type==1)
03011 if (optim.type == 1) {
03012
03013     int vartypex = optim.arg1>0 ? SYMBOL : EXTRASYMBOL;
03014     int varnumx = ABS(optim.arg1) - 1;
03015     int vartypey = optim.arg2>0 ? SYMBOL : EXTRASYMBOL;
03016     int varnumy = ABS(optim.arg2) - 1;
03017
03018     for (int i=0; i<(int)optim.eqnidxs.size(); i++) {
03019         WORD *e = ebegin + optim.eqnidxs[i];
03020         if (*(e+1) != OPER_MUL) continue;
03021
03022         // scan through equation
03023         int powx=0, powy=0;
03024         for (WORD *t=e+3; *t!=0; t+=*t) {
03025             if (*t == ABS(*(t+*t-1))+1) continue;
03026             if (*(t+1)==vartypex && *(t+3)==varnumx) powx = *(t+4);
03027             if (*(t+1)==vartypey && *(t+3)==varnumy) powy = *(t+4);
03028         }
03029
03030         // substitute if found
03031         if (powx>0 && powy>0 && powx==powy) {
03032
03033             WORD sign = 1;
03034             WORD *newt = e+3;
03035
03036             for (WORD *t=e+3; *t!=0; ) {
03037                 int dt=*t;
03038
03039                 if (*t == ABS(*(t+*t-1))+1 ||
03040                     (!(*(t+1)==vartypex && *(t+3)==varnumx) &&
03041                      !(*(t+1)==vartypey && *(t+3)==varnumy))) {
03042                     memmove(newt, t, *t*sizeof(WORD));
03043                     newt += dt;
03044                 }
03045                 else {
03046                     sign *= SGN(*(t+*t-1));
03047                 }
03048
03049                 t+=dt;
03050             }
03051
03052             *newt++ = 8; // term length
03053             *newt++ = EXTRASYMBOL; // extrasymbol
03054             *newt++ = 4; // symbol length
03055             *newt++ = newid; // symbol id
03056             *newt++ = powx; // power
03057             *newt++ = 1;
03058             *newt++ = 1; // coefficient +/-1
03059             *newt++ = 3*sign;
03060             *newt++ = 0; // trailing 0
03061
03062             substituted = true;
03063         }
03064     }
03065
03066     if (!substituted) {
03067 #ifdef DEBUG_GREEDY
03068         MesPrint ("*** [%s, w=%w] DONE: do_optimization : res=false", thetime_str().c_str(),
optim.improve);
03069 #endif
03070         return false;
03071     }
03072
03073     // add extra equation (Tnew = x*y)

```

```

03074     instr.push_back(newid);      // eqn.nr
03075     instr.push_back(OPER_MUL);  // operator
03076     instr.push_back(20);        // total length
03077     instr.push_back(8);         // LHS length
03078     instr.push_back(vartypex);  // (extra)symbol
03079     instr.push_back(4);         // symbol length
03080     instr.push_back(varnumx);   // symbol id
03081     instr.push_back(1);         // power 1
03082     instr.push_back(1);
03083     instr.push_back(1);         // coefficient 1
03084     instr.push_back(3);
03085     instr.push_back(8);         // RHS length
03086     instr.push_back(vartypey);  // (extra)symbol
03087     instr.push_back(4);         // symbol length
03088     instr.push_back(varnumy);   // symbol id
03089     instr.push_back(1);         // power 1
03090     instr.push_back(1);
03091     instr.push_back(1);         // coefficient 1
03092     instr.push_back(3);
03093     instr.push_back(0);         // trailing 0
03094 }
03095 // #] type 1 :
03096 // #[ type 2 : substitution of the form z=c*x (optim.type==2)
03097
03098 if (optim.type == 2) {
03099     int vartype = optim.arg1>0 ? SYMBOL : EXTRASYMBOL;
03100     int varnum = ABS(optim.arg1) - 1;
03101
03102     WORD ncoeff = optim.coeff.back();
03103
03104     // scan through equations
03105     for (int i=0; i<(int)optim.eqnidxs.size(); i++) {
03106         WORD *e = ebegin + optim.eqnidxs[i];
03107
03108         if (*(e+1) == OPER_ADD) {
03109             // scan through ADD-equation
03110             for (WORD *t=e+3; *t!=0; t+=*t) {
03111
03112                 if (*t == ABS(*(t+*t-1))+1) continue;
03113
03114                 if (*(t+1)==vartype && ABS(*(t+3))==varnum && *(t+4)==1 &&
03115                     BigLong((UWORD *) &optim.coeff[0], ncoeff-1,
03116                             (UWORD *) t+*t-ABS(*(t+*t-1)), ABS(*(t+*t-1))-1) == 0) {
03117                     // substitute
03118
03119                     int sign = SGN(*(t+*t-1));
03120
03121                     WORD *tend = t;
03122                     while (*tend!=0) tend+=*tend;
03123                     WORD nmove = tend - t - *t;
03124                     memmove(t, t+*t, nmove*sizeof(WORD));
03125                     t += nmove;
03126
03127                     *t++ = 8;           // term length
03128                     *t++ = EXTRASYMBOL; // (extra)symbol
03129                     *t++ = 4;           // symbol length
03130                     *t++ = newid;       // symbol id
03131                     *t++ = 1;           // power of 1
03132                     *t++ = 1;
03133                     *t++ = 1;           // coefficient of +/-1
03134                     *t++ = 3 * sign;
03135                     *t++ = 0;           // trailing 0
03136
03137                     substituted = true;
03138                     break;
03139                 }
03140             }
03141         }
03142         else if (*(e+1) == OPER_MUL) {
03143
03144             bool coeff_match=false, var_match=false;
03145             int sign = 1;
03146
03147             // scan through MUL-equation
03148             for (WORD *t=e+3; *t!=0; t+=*t) {
03149                 if (*t == ABS(*(t+*t-1))+1 && BigLong((UWORD *) &optim.coeff[0], ncoeff-1,
03150                     *(t+*t-ABS(*(t+*t-1))), ABS(*(t+*t-1))-1) == 0) {
03151                     coeff_match = true;
03152                     sign *= SGN(*(t+*t-1));
03153                 }
03154                 else if (*(t+1)==vartype && ABS(*(t+3))==varnum && *(t+4)==1) {
03155                     var_match = true;
03156                     sign *= SGN(*(t+*t-1));
03157                 }
03158             }
03159         }
03160     }

```

```

03160         // substitute if found
03161         if (coeff_match && var_match) {
03162
03163             WORD *newt = e+3;
03164
03165             for (WORD *t=e+3; *t!=0;) {
03166
03167                 int dt=*t;
03168
03169                 if (*t!=ABS(*(t+*t-1))+1 && !(*t+1)==vartype && ABS(*(t+3))==varnum &&
* (t+4)==1) ) {
03170                     memmove(newt, t, dt*sizeof(WORD));
03171                     newt += dt;
03172                 }
03173
03174                 t+=dt;
03175             }
03176
03177             *newt++ = 8;           // term length
03178             *newt++ = EXTRASYMBOL; // extrasymbol
03179             *newt++ = 4;           // symbol length
03180             *newt++ = newid;       // symbol id
03181             *newt++ = 1;           // power of 1
03182             *newt++ = 1;
03183             *newt++ = 1;           // coefficient of +/-1
03184             *newt++ = 3 * sign;
03185             *newt++ = 0;           // trailing 0
03186
03187             substituted = true;
03188         }
03189     }
03190 }
03191
03192     if (!substituted) {
03193 #ifdef DEBUG_GREEDY
03194         MesPrint ("*** [%s, w=%w] DONE: do_optimization : res=false", thetime_str().c_str(),
optim.improve);
03195 #endif
03196         return false;
03197     }
03198
03199     // add extra equation (Tnew = c*y)
03200     instr.push_back(newid); // eqn.nr
03201     instr.push_back(OPER_ADD); // operator
03202     instr.push_back(9+ABS(ncoeff)); // total length
03203     instr.push_back(5+ABS(ncoeff)); // term length
03204     instr.push_back(vartype); // (extra)symbol
03205     instr.push_back(4); // symbol length
03206     instr.push_back(varnum); // symbol id
03207     instr.push_back(1); // power of 1
03208     for (int i=0; i<ABS(ncoeff); i++) // coefficient
03209         instr.push_back(optim.coeff[i]);
03210     instr.push_back(0); // trailing 0
03211 }
03212 // #] type 2 :
03213 // #[ type 3 : substitution of the form z=x+c (optim.type==3)
03214 if (optim.type == 3) {
03215     int vartype = optim.arg1>0 ? SYMBOL : EXTRASYMBOL;
03216     int varnum = ABS(optim.arg1) - 1;
03217
03218     WORD ncoeff = optim.coeff.back();
03219
03220     // scan through equation
03221     for (int i=0; i<(int)optim.eqnidxs.size(); i++) {
03222         WORD *e = ebegin + optim.eqnidxs[i];
03223
03224         if (*(e+1) != OPER_ADD) continue;
03225
03226         int coeff_match=0, var_match=0;
03227
03228         for (WORD *t=e+3; *t!=0; t+=*t) {
03229             if (*t == ABS(*(t+*t-1))+1 && BigLong((UWORD *)&optim.coeff[0],ABS(ncoeff)-1,
(UWORD
* )t+*t-ABS(*(t+*t-1)),ABS(*(t+*t-1))-1) == 0)
03231                 coeff_match = SGN(ncoeff) * SGN(*(t+*t-1));
03232             else if (*t+1==vartype && ABS(*(t+3))==varnum && *(t+4)==1)
03233                 var_match = SGN(*(t+7));
03234         }
03235
03236         // substitute if found (x+c and -x-c and matches)
03237         if (coeff_match * var_match == 1) {
03238
03239             WORD *newt = e+3;
03240
03241             for (WORD *t=e+3; *t!=0;) {
03242                 int dt=*t;
03243                 if (*t!=ABS(*(t+*t-1))+1 && !(*t+1)==vartype && ABS(*(t+3))==varnum &&

```

```

    *(t+4)==1)) {
03244             memmove(newt, t, dt*sizeof(WORD));
03245             newt += dt;
03246         }
03247         t+=dt;
03248     }
03249
03250     *newt++ = 8;           // term length
03251     *newt++ = EXTRASYMBOL; // extrasymbol
03252     *newt++ = 4;           // symbol length
03253     *newt++ = newid;       // symbol id
03254     *newt++ = 1;           // power of 1
03255     *newt++ = 1;
03256     *newt++ = 1;           // coefficient of +/-1
03257     *newt++ = 3*coeff_match;
03258     *newt++ = 0;           // trailing zero
03259
03260     substituted = true;
03261 }
03262 }
03263
03264     if (!substituted) {
03265 #ifdef DEBUG_GREEDY
03266         MesPrint ("*** [%s, w=%w] DONE: do_optimization : res=false", thetime_str().c_str(),
optim.improve);
03267 #endif
03268         return false;
03269     }
03270
03271     // add extra equation (Tnew = x+c)
03272     instr.push_back(newid);           // eqn.nr
03273     instr.push_back(OPER_ADD);        // operator
03274     instr.push_back(13+ABS(ncoeff));  // total length
03275     instr.push_back(8);               // x-term length
03276     instr.push_back(vartype);         // (extra)symbol
03277     instr.push_back(4);               // symbol length
03278     instr.push_back(varnum);          // symbol id
03279     instr.push_back(1);               // power of 1
03280     instr.push_back(1);
03281     instr.push_back(1);               // coefficient of 1
03282     instr.push_back(3);
03283     instr.push_back(ABS(ncoeff)+1);   // c-term length
03284     for (int i=0; i<ABS(ncoeff); i++) // coefficient
03285         instr.push_back(optim.coeff[i]);
03286     instr.push_back(0);               // trailing zero
03287 }
03288 // #] type 3 :
03289 // #[ type 4,5 : substitution of the form z=x+y or z=x-y (optim.type=4 or 5)
03290 if (optim.type >= 4) {
03291
03292     int vartypex = optim.arg1>0 ? SYMBOL : EXTRASYMBOL;
03293     int varnumx = ABS(optim.arg1) - 1;
03294     int vartypey = optim.arg2>0 ? SYMBOL : EXTRASYMBOL;
03295     int varnumy = ABS(optim.arg2) - 1;
03296
03297     // scan through equations
03298     for (int i=0; i<(int)optim.eqnidxs.size(); i++) {
03299         WORD *e = ebegin + optim.eqnidxs[i];
03300
03301         if (*(e+1) != OPER_ADD) continue;
03302
03303         const WORD *coeffx=NULL, *coeffy=NULL;
03304         WORD ncoeffx=0,ncoeffy=0;
03305
03306         // looks for terms
03307         for (WORD *t=e+3; *t!=0; t+=*t) {
03308             if (*t == ABS(*(t+*t-1))+1) continue; // constant
03309             if (*(t+1)==vartypex && *(t+3)==varnumx && *(t+4)==1) {
03310                 coeffx = t+5;
03311                 ncoeffx = *(t+*t-1);
03312             }
03313             if (*(t+1)==vartypey && *(t+3)==varnumy && *(t+4)==1) {
03314                 coeffy = t+5;
03315                 ncoeffy = *(t+*t-1);
03316             }
03317         }
03318
03319         // check signs (type=4: x+y and -x-y, type=5: x-y and -x+y) ??????
03320         // check signs (type=4: x+y, type=5: x-y) !!!!!!!!!!!!!
03321         if (SGN(ncoeffx) * SGN(ncoeffy) * (optim.type==4 ? 1 : -1) == 1) {
03322             // check absolute value of coefficients
03323             if (BigLong((UWORD *)coeffx, ABS(ncoeffx)-1, (UWORD *)coeffy, ABS(ncoeffy)-1) == 0) {
03324                 // substitute
03325                 vector<WORD> coeff(coeffx, coeffx+ABS(ncoeffx));
03326
03327                 WORD *newt = e+3;
03328 /*

```

```

03329 if ( optim.type == 5 ) {
03330     while ( *newt ) newt+=*newt;
03331     int i = (newt - e) - 3;
03332     MesPrint(" < %a",i,e+3);
03333     newt = e+3;
03334 }
03335 */
03336         for (WORD *t=e+3; *t!=0;) {
03337             int dt=*t;
03338             if (*t == ABS(*t+*t-1))+1 ||
03339                 (!(*t+1)==vartypex && *(t+3)==varnumx) &&
03340                 (!(*t+1)==vartypey && *(t+3)==varnumy)) {
03341                 memmove(newt, t, dt*sizeof(WORD));
03342                 newt += dt;
03343             }
03344             t+=dt;
03345         }
03346
03347         *newt++ = 5 + ABS(ncoeffx);           // term length
03348         *newt++ = EXTRASYMBOL;               // extrasymbol
03349         *newt++ = 4;                         // symbol length
03350         *newt++ = newid;                     // symbol id
03351         *newt++ = 1;                         // power of 1
03352         for (int j=0; j<ABS(ncoeffx); j++) // coefficient
03353             *newt++ = coeff[j];
03354         *newt++ = 0;                         // trailing 0
03355         substituted = true;
03356     /*
03357     if ( optim.type == 5 ) {
03358         int i = (newt - e) - 4;
03359         MesPrint(" > %a",i,e+3);
03360     }
03361     */
03362     }
03363 }
03364 }
03365
03366     if (!substituted) {
03367 #ifdef DEBUG_GREEDY
03368         MesPrint ("*** [%s, w=%w] DONE: do_optimization : res=false", thetime_str().c_str(),
03369             optim.improve);
03369 #endif
03370         return false;
03371     }
03372     /*
03373     if ( optim.type == 5 )
03374     MesPrint ("improve=%d, %c%d%c%c%d", optim.improve,
03375         optim.arg1>0?'x':'Z', ABS(optim.arg1)-1,
03376         optim.type==1 ? '*' : optim.type==4 ? '+' : '-',
03377         optim.arg2>0?'x':'Z', ABS(optim.arg2)-1);
03378     */
03379     // add extra equation (Tnew = x+/-y)
03380     instr.push_back(newid); // eqn.nr
03381     instr.push_back(OPER_ADD); // operator
03382     instr.push_back(20); // total length
03383     instr.push_back(8); // term length
03384     instr.push_back(vartypex); // (extra)symbol
03385     instr.push_back(4); // symbol length
03386     instr.push_back(varnumx); // symbol id
03387     instr.push_back(1); // power of 1
03388     instr.push_back(1);
03389     instr.push_back(1); // coefficient of 1
03390     instr.push_back(3);
03391     instr.push_back(8); // term length
03392     instr.push_back(vartypey); // (extra)symbol
03393     instr.push_back(4); // symbol length
03394     instr.push_back(varnumy); // symbol id
03395     instr.push_back(1); // power of 1
03396     instr.push_back(1);
03397     instr.push_back(1); // coefficient of +/-1
03398     instr.push_back(3*(optim.type==4?1:-1));
03399     instr.push_back(0); // trailing 0
03400 }
03401 // #] type 4,5 :
03402 // #[ trivial : remove trivial equations of the form Zi = +/-Zj
03403 vector<int> renum(newid+1, 0);
03404 bool do_renum=false;
03405
03406 // vector may be moved when it is extended
03407 ebegin = &*instr.begin();
03408
03409 for (int i=0; i<(int)optim.eqnidxs.size(); i++) {
03410     WORD *e = ebegin + optim.eqnidxs[i];
03411     WORD *t = e+3;
03412     if (*t==0) continue; // empty (removed) equation
03413     if (*t+*t)!=0 continue; // more than 1 term
03414     if (*t!=8) continue; // term not of correct form

```



```

03415         if (*(t+4)!=1) continue; // power != 1
03416         if (*(t+5)!=1 || *(t+6)!=1) continue; // coeff != +/-1
03417
03418         // trivial term, so renumber this one
03419         renum[*e] = SGN(*(t+7)) * (*(t+3) + 1);
03420         do_renum = true;
03421
03422         // remove equation
03423         *t=0;
03424     }
03425     // #] trivial :
03426     // #[ renumbering :
03427
03428     // there are renumberings to be done, so loop through all equations
03429     if (do_renum) {
03430         WORD *eend = ebegin+instr.size();
03431
03432         for (WORD *e=ebegin; e!=eend; e+=*(e+2)) {
03433             for (WORD *t=e+3; *t!=0; t+=*t) {
03434                 if (*t == ABS(*(t+*t-1))+1) continue;
03435                 if (*(t+1)==EXTRASymbol && renum[* (t+3)]!=0) {
03436                     *(t+*t-1) *= SGN(renum[* (t+3)]);
03437                     *(t+3) = ABS(renum[* (t+3)]) - 1;
03438                 }
03439             }
03440         }
03441     }
03442     // #] renumbering :
03443
03444     #ifdef DEBUG_GREEDY
03445     MesPrint ("*** [%s, w=%w] DONE: do_optimization : res=true", thetime_str().c_str(),
03446             optim.improve);
03447     #endif
03448     return true;
03449 }
03450
03451 /*
03452 #] do_optimization :
03453 #[ partial_factorize :
03454 */
03455
03479 int partial_factorize (vector<WORD> &instr, int n, int improve) {
03480
03481     #ifdef DEBUG_GREEDY
03482     MesPrint ("*** [%s, w=%w] CALL: partial_factorize (n=%d)", thetime_str().c_str(), n);
03483     #endif
03484
03485     GETIDENTITY;
03486
03487     // get starting positions of instructions
03488     vector<int> instr_idx(n);
03489     WORD *ebegin = &instr.begin();
03490     WORD *eend = ebegin+instr.size();
03491     for (WORD *e=ebegin; e!=eend; e+=*(e+2)) {
03492         instr_idx[*e] = e - ebegin;
03493     }
03494
03495     // get reference counts
03496     /*
03497     * The next construction replaces the vector construction which is
03498     * rather costly for valgrind (and maybe also in normal running)
03499     */
03500     int nmax = 2*n;
03501     WORD *numpar = (WORD *)Malloc1(nmax*sizeof(WORD),"numpar");
03502     for ( int i = 0; i < nmax; i++ ) numpar[i] = 0;
03503     // vector<WORD> numpar(n);
03504     for (WORD *e=ebegin; e!=eend; e+=*(e+2))
03505         for (WORD *t=e+3; *t!=0; t+=*t) {
03506             if (*t == ABS(*(t+*t-1))+1) continue;
03507             if (*(t+1) == EXTRASymbol) numpar[* (t+3)]++;
03508         }
03509
03510     // find factorizable expressions
03511     for (int i=0; i<n; i++) {
03512         WORD *e = &instr.begin() + instr_idx[i];
03513         if (*(e+1) != OPER_ADD) continue;
03514
03515         // count symbol occurrences
03516         map<WORD,WORD> cnt; // 1-indexed, <0:EXTRASymbol, >0:SYMBOL
03517
03518         for (WORD *t=e+3; *t!=0; t+=*t) {
03519             if (*t==ABS(*(t+*t-1))+1) continue;
03520
03521             // count symbols in t
03522             if (*(t+4)==1)
03523                 cnt[(*(t+1)==SYMBOL ? 1 : -1) * (*(t+3)+1)]++;

```

```

03524
03525 // count symbols in extrasymbols of t
03526 if (*(t+1)==EXTRASymbol && *(t+4)==1 && numpar[*(t+3)]==1) {
03527     WORD *t2 = &*instr.begin() + instr_idx[*(t+3)];
03528     if (*(t2+1) != OPER_MUL) continue;
03529     for (t2+=3; *t2!=0; t2+=*t2) {
03530         if (*t2 == ABS(*(t2+t2-1))+1) continue;
03531         if (*(t2+4)==1)
03532             cnt[*(t2+1)==SYMBOL ? 1 : -1] * (*(t2+3)+1)++;
03533     }
03534 }
03535 }
03536
03537 // find most-occurring symbol
03538 WORD x=0, best=0;
03539 for (map<WORD,WORD>::iterator it=cnt.begin(); it!=cnt.end(); it++)
03540     if (it->second > best) { x=it->first; best=it->second; }
03541
03542 // occurrence>=2 and occurrence>improve, so factorize
03543
03544 if (best>=2 && best>improve) {
03545     // initialize new equation (Zi from example above)
03546     vector<WORD> new_eqn;
03547     new_eqn.push_back(n);
03548     new_eqn.push_back(OPER_ADD);
03549     new_eqn.push_back(0); // length
03550
03551     WORD dt;
03552     WORD *newt=e+3;
03553     for (WORD *t=e+3; *t!=0; t+=dt) {
03554         dt = *t;
03555         bool keep=true;
03556
03557         if (*t!=ABS(*(t+t-1))+1) {
03558
03559             // factorized symbol is in t itself
03560             if (*(t+4)==1) {
03561                 WORD y = (*(t+1)==SYMBOL ? 1 : -1) * (*(t+3)+1);
03562                 if (y==x) {
03563                     new_eqn.push_back(*t-4);
03564                     new_eqn.insert(new_eqn.end(), t+5, t+dt);
03565                     keep=false;
03566                 }
03567             }
03568
03569             // look in extrasymbol of t with ref.count=1
03570             if (*(t+1)==EXTRASymbol && *(t+4)==1 && numpar[*(t+3)]==1) {
03571                 WORD *t2 = &*instr.begin() + instr_idx[*(t+3)];
03572                 if (*(t2+1) == OPER_MUL) {
03573                     bool has_x=false;
03574                     for (t2+=3; *t2!=0; t2+=*t2) {
03575                         if (*t2 == ABS(*(t2+t2-1))+1) continue;
03576                         WORD y = (*(t2+1)==SYMBOL ? 1 : -1) * (*(t2+3)+1);
03577                         // extrasymbol has factorized symbol
03578                         if (y==x && *(t2+4)==1) {
03579                             has_x=true;
03580                             // copy remaining part
03581                             WORD *tend=t2+t2;
03582                             WORD sign = SGN(*(tend-1));
03583                             while (*tend!=0) tend+=*tend;
03584                             int dt2 = tend - (t2+t2);
03585                             memmove(t2, t2+t2, (dt2+1)*sizeof(WORD));
03586                             t2 += dt2;
03587                             *(t2-1) *= sign;
03588                             break;
03589                         }
03590                     }
03591                     if (has_x) {
03592                         // extrasymbol has x, so add it to new equation
03593                         keep=false;
03594                         int thisidx=new_eqn.size();
03595                         new_eqn.insert(new_eqn.end(), t, t+dt);
03596                         t2 = &*instr.begin() + instr_idx[*(t+3)] + 3;
03597                         // if becomes trivial, substitute the term
03598                         if (*(t2+t2)==0) {
03599                             // it's a number
03600                             if (*t2 == ABS(*(t2+t2-1))+1) {
03601                                 if (ABS(new_eqn[new_eqn.size()-1])==3 &&
03602                                     new_eqn[new_eqn.size()-2]==1 && new_eqn[new_eqn.size()-3]==1) {
03603                                     // original equation has coefficient of +/-1, so replace
03604                                     it
03605                                     WORD sign = SGN(new_eqn.back());
03606                                     new_eqn.erase(new_eqn.begin()+thisidx, new_eqn.end());
03607                                     new_eqn.insert(new_eqn.end(), t2, t2+t2);
03608                                     new_eqn.back() *= sign;
03609                                     *t2 = 0;
03610                                 }
03611                             }
03612                         }
03613                     }
03614                 }
03615             }
03616         }
03617     }
03618 }

```

```

03609                                     else {
03610                                         // two non-trivial coefficients, so multiply them
03611                                         // note: untested code (found no way to trigger it)
03612                                         UWORD *tmp = NumberMalloc("partial_factorize");
03613                                         WORD ntmp=0;
03614                                         MulRat (BHEAD (UWORD *)t2+*t2-ABS(* (t2+*t2-1)),
* (t2+*t2-1),
03615                                                         (UWORD
*)&*(new_eqn.end()-ABS(new_eqn.back())), new_eqn.back(),
03616                                                         tmp, &ntmp);
03617                                         new_eqn.erase(new_eqn.begin()+thisidx, new_eqn.end());
03618                                         new_eqn.push_back(ABS(ntmp)+1);
03619                                         new_eqn.insert(new_eqn.end(), tmp, tmp+ABS(ntmp));
03620                                         NumberFree(tmp,"partial_factorize");
03621                                         *t2 = 0;
03622                                     }
03623                                 }
03624                             else if (*(t2+4)==1) {
03625                                 // it's a variable
03626                                 new_eqn.back() *= SGN(* (t2+*t2-1));
03627                                 new_eqn[thisidx+1] = *(t2+1);
03628                                 new_eqn[thisidx+2] = *(t2+2);
03629                                 new_eqn[thisidx+3] = *(t2+3);
03630                                 new_eqn[thisidx+4] = *(t2+4);
03631                                 *t2 = 0;
03632                             }
03633                         }
03634                     }
03635                 }
03636             }
03637         }
03638     // no x, so copy it
03639     if (keep) {
03640         memmove(newt, t, dt*sizeof(WORD));
03641         newt += dt;
03642     }
03643 }
03644 }
03645
03646 // finalize new equation
03647 new_eqn.push_back(0);
03648 new_eqn[2] = new_eqn.size();
03649
03650 bool empty = newt == e+3;
03651 if ( n+1 >= nmax ) {
03652     int i, newnmax = nmax*2;
03653     WORD *newnumpar = (WORD *)Malloc1(newnmax*sizeof(WORD), "newnumpar");
03654     for ( i = 0; i < n; i++ ) newnumpar[i] = numpar[i];
03655     for ( i < newnmax; i++ ) newnumpar[i] = 0;
03656     M_free(numpar, "numpar");
03657     numpar = newnumpar;
03658     nmax = newnmax;
03659 }
03660 // numpar.push_back(0);
03661 n++;
03662
03663 // if original is not empty, add new equation (Zj) to it
03664 // otherwise replace it later
03665 if (!empty) {
03666     *newt++ = 8;
03667     *newt++ = EXTRASYMBOL;
03668     *newt++ = 4;
03669     *newt++ = n;
03670     *newt++ = 1;
03671     *newt++ = 1;
03672     *newt++ = 1;
03673     *newt++ = 3;
03674     *newt++ = 0;
03675 }
03676
03677 // add new equation to instructions
03678 instr_idx.push_back(instr.size());
03679 instr.insert(instr.end(), new_eqn.begin(), new_eqn.end());
03680
03681 // generate another new equation (Zj=x*Zi)
03682 new_eqn.clear();
03683 new_eqn.push_back(n);
03684 new_eqn.push_back(OPER_MUL);
03685 new_eqn.push_back(20);
03686 new_eqn.push_back(8);
03687
03688 // add factorized symbol
03689 if (x>0) {
03690     new_eqn.push_back(SYMBOL);
03691     new_eqn.push_back(4);
03692     new_eqn.push_back(x-1);
03693     new_eqn.push_back(1);

```

```

03694     }
03695     else {
03696         new_eqn.push_back(EXTRASymbol);
03697         new_eqn.push_back(4);
03698         new_eqn.push_back(-x-1);
03699         new_eqn.push_back(1);
03700     }
03701     new_eqn.push_back(1);
03702     new_eqn.push_back(1);
03703     new_eqn.push_back(3);
03704     new_eqn.push_back(8);
03705     // add new equation (Zi)
03706     new_eqn.push_back(EXTRASymbol);
03707     new_eqn.push_back(4);
03708     new_eqn.push_back(n-1);
03709     new_eqn.push_back(1);
03710     new_eqn.push_back(1);
03711     new_eqn.push_back(1);
03712     new_eqn.push_back(3);
03713     new_eqn.push_back(0);
03714
03715     if (!empty) {
03716         // add new equation (Zj) to instructions
03717         instr_idx.push_back(instr.size());
03718         instr.insert(instr.end(), new_eqn.begin(), new_eqn.end());
03719         if ( n+1 >= nmax ) {
03720             int i, newnmax = nmax*2;
03721             WORD *newnumpar = (WORD *)Malloc1(newnmax*sizeof(WORD), "newnumpar");
03722             for ( i = 0; i < n; i++ ) newnumpar[i] = numpar[i];
03723             for ( ; i < newnmax; i++ ) newnumpar[i] = 0;
03724             M_free(numpar, "numpar");
03725             numpar = newnumpar;
03726             nmax = newnmax;
03727         }
03728         // numpar.push_back(0);
03729         n++;
03730     }
03731     else {
03732         // replace e with Zj
03733         e = &instr.begin() + instr_idx[i];
03734         e[1] = OPER_MUL;
03735         memcpy(e+3, &new_eqn[3], (new_eqn.size()-3)*sizeof(WORD));
03736     }
03737
03738     // decrease i, so this expression is factorized again if possible
03739     i--;
03740 }
03741 }
03742
03743 #ifdef DEBUG_GREEDY
03744     MesPrint ("*** [%s, w=%w] DONE: partial_factorize (n=%d)", thetime_str().c_str(), n);
03745 #endif
03746     M_free(numpar, "numpar");
03747     return n;
03748 }
03749
03750 /*
03751 #] partial_factorize :
03752 #[ optimize_greedy :
03753 */
03754
03755 vector<WORD> optimize_greedy (vector<WORD> instr, LONG time_limit) {
03756
03757 #ifdef DEBUG
03758     int old_num_oper = count_operators(instr);
03759     MesPrint ("*** [%s, w=%w] CALL: optimize_greedy(numoper=%d)",
03760             thetime_str().c_str(), old_num_oper);
03761 #endif
03762
03763     LONG start_time = TimeWallClock(1);
03764
03765     WORD *ebegin = &instr.begin();
03766     WORD *eend = ebegin+instr.size();
03767
03768     // store final equation, since it must be the last equation later
03769     int final_eqn_idx = 0;
03770     int next_eqn = 0;
03771
03772     for (WORD *e=ebegin; e!=eend; e+=*(e+2)) {
03773         next_eqn = *e + 1;
03774         final_eqn_idx = e-ebegin;
03775     }
03776
03777     // optimize instructions
03778     while (TimeWallClock(1)-start_time < time_limit) {
03779         int old_next_eqn = next_eqn;
03780
03781         // find optimizations

```

```

03799     vector<optimization> optim = find_optimizations(instr);
03800
03801     // add_eqnidxs contains modified equations, which might have to be updated later again
03802     vector<int> add_eqnidxs;
03803
03804     // number of optimizations to do
03805     int num_do_optims = max(AO.Optimize.greedyminnum,
(int)optim.size()*AO.Optimize.greedymaxperc/100);
03806
03807     // if best improvement is one, do all optimizations
03808     int best_improve=0;
03809     for (int i=0; i<(int)optim.size(); i++)
03810         best_improve = max(best_improve, optim[i].improve);
03811     if (best_improve <= 1)
03812         num_do_optims = MAXPOSITIVE;
03813     // do a number of optimizations
03814     while (optim.size() > 0 && num_do_optims-- > 0) {
03815
03816         // find best optimization
03817         int best=0;
03818         best_improve=0;
03819         for (int i=0; i<(int)optim.size(); i++)
03820             if (optim[i].improve > best_improve) {
03821                 best=i;
03822                 best_improve=optim[i].improve;
03823             }
03824
03825         // add extra equations
03826         for (int i=0; i<(int)add_eqnidxs.size(); i++)
03827             optim[best].eqnidxs.push_back(add_eqnidxs[i]);
03828
03829         // do optimization, update next_eqn if successful
03830         int next_idx = instr.size();
03831         if (do_optimization(optim[best], instr, next_eqn)) {
03832             next_eqn++;
03833             add_eqnidxs.push_back(next_idx);
03834         }
03835
03836         optim.erase(optim.begin()+best);
03837     }
03838
03839     // partially factorize with improve >= best_improve
03840     next_eqn = partial_factorize(instr, next_eqn, best_improve);
03841
03842     // check whether nothing has changed
03843     if (next_eqn == old_next_eqn) break;
03844 }
03845
03846 // add final equation to the back (must be by definition)
03847 instr.push_back(next_eqn);
03848 instr.insert(instr.end(), instr.begin()+final_eqn_idx+1,
instr.begin()+final_eqn_idx+instr[final_eqn_idx+2]);
03849
03850 // removed original final equation
03851 instr[final_eqn_idx+3] = 0;
03852
03853 // remove extra zeroes
03854 WORD *t = &instr[0];
03855
03856 ebegin = &*instr.begin();
03857 eend = ebegin+instr.size();
03858 int de=0;
03859
03860 for (WORD *e=ebegin; e!=eend; e+=de) {
03861     de = *(e+2);
03862     int n=3;
03863     while (*(e+n) != 0) n+=*(e+n);
03864     n++;
03865     memmove(t, e, n*sizeof(WORD));
03866     *(t+2) = n;
03867     t += n;
03868 }
03869
03870 instr.resize(t - &instr[0]);
03871
03872 #ifdef DEBUG
03873     MesPrint ("*** [%s, w=%w] DONE: optimize_greedy(numoper=%d) : numoper=%d",
03874             thetime_str().c_str(), old_num_oper, count_operators(instr));
03875 #endif
03876
03877     return instr;
03878 }
03879
03880 /*
03881     #] optimize_greedy :
03882     #[ recycle_variables :
03883 */

```

```

03884
03913 vector<WORD> recycle_variables (const vector<WORD> &all_instr) {
03914
03915 #ifdef DEBUG_MORE
03916     MesPrint ("*** [%s, w=%w] CALL: recycle_variables", thetime_str().c_str());
03917 #endif
03918
03919     // get starting positions of instructions
03920     vector<const WORD *> instr;
03921     const WORD *tbegin = &all_instr.begin();
03922     const WORD *tend = tbegin+all_instr.size();
03923     for (const WORD *t=tbegin; t!=tend; t+=*(t+2))
03924         instr.push_back(t);
03925     int n = instr.size();
03926
03927     // determine with expressions are connected, how many intermediate
03928     // are needed (assuming it's a expression tree instead of a DAG) and
03929     // sort the leaves such that you need a minimal number of variables
03930     vector<int> vars_needed(n);
03931     vector<bool> vis(n,false);
03932     vector<vector<int> > conn(n);
03933
03934     stack<int> s;
03935     s.push(n);
03936
03937     while (!s.empty()) {
03938         int i=s.top(); s.pop();
03939         if (i>0) {
03940             i--;
03941             if (vis[i]) continue;
03942             vis[i]=true;
03943             s.push(-(i+1));
03944
03945             // find all connections
03946             for (const WORD *t=instr[i]+3; *t!=0; t+=*t)
03947                 if (*t!=1+ABS(*(t+*t-1)) && *(t+1)==EXTRASYMBOL) {
03948                     int k = *(t+3);
03949                     conn[i].push_back(k);
03950                     s.push(k+1);
03951                 }
03952         }
03953         else {
03954             i=-i-1;
03955
03956             // sort the childs w.r.t. needed variables
03957             vector<pair<int,int> > need;
03958             for (int j=0; j<(int)conn[i].size(); j++)
03959                 need.push_back(make_pair(vars_needed[conn[i][j]], conn[i][j]));
03960
03961             // keep the comma expression in proper order
03962             if (*(instr[i]+1) != OPER_COMMA)
03963                 sort(need.rbegin(), need.rend());
03964
03965             vars_needed[i] = 1;
03966             for (int j=0; j<(int)need.size(); j++) {
03967                 vars_needed[i] = max(vars_needed[i], need[j].first+j);
03968                 conn[i][j] = need[j].second;
03969             }
03970         }
03971     }
03972
03973     // order the instructions in depth-first order and determine the first
03974     // and last occurrences of variables
03975     vector<int> order, first(n,0), last(n,0);
03976     vis = vector<bool>(n,false);
03977     s.push(n);
03978
03979     while (!s.empty()) {
03980         int i=s.top(); s.pop();
03981
03982         if (i>0) {
03983             i--;
03984             if (vis[i]) continue;
03985             vis[i]=true;
03986             s.push(-(i+1));
03987             for (int j=(int)conn[i].size()-1; j>=0; j--)
03988                 s.push(conn[i][j]+1);
03989         }
03990         else {
03991             i=-i-1;
03992             first[i] = last[i] = order.size();
03993             order.push_back(i);
03994             for (int j=0; j<(int)conn[i].size(); j++) {
03995                 int k = conn[i][j];
03996                 last[k] = max(last[k], first[i]);
03997             }
03998         }
03999     }

```

```

03999     }
04000 }
04001
04002 // find the renumbering to recycled variables, where at any time the
04003 // lowest-indexed variable that can be used is chosen
04004 int numvar=0;
04005 set<int> var;
04006 vector<int> renum(n);
04007
04008 for (int i=0; i<(int)order.size(); i++) {
04009     for (int j=0; j<(int)conn[order[i]].size(); j++) {
04010         int k = conn[order[i]][j];
04011         if (last[k] == i) var.insert(renum[k]);
04012     }
04013
04014     if (var.empty()) var.insert(numvar++);
04015     renum[order[i]] = *var.begin(); var.erase(var.begin());
04016 }
04017
04018 // put the number of variables used in a preprocessor variable
04019
04020 // generate new instructions with the renumbering
04021 vector<WORD> newinstr;
04022
04023 for (int i=0; i<(int)order.size(); i++) {
04024     int x = order[i];
04025     int j = newinstr.size();
04026     newinstr.insert(newinstr.end(), instr[x], instr[x]+(instr[x]+2));
04027
04028     newinstr[j] = renum[newinstr[j]];
04029
04030     for (WORD *t=&newinstr[j+3]; *t!=0; t+=*t)
04031         if (*t!=1+ABS(*t+*t-1)) && *(t+1)==EXTRASymbol
04032             *(t+3) = renum[*t+3];
04033 }
04034
04035 #ifdef DEBUG_MORE
04036     MesPrint ("*** [%s, w=%w] DONE: recycle_variables", thetime_str().c_str());
04037 #endif
04038
04039     return newinstr;
04040 }
04041
04042 /*
04043 #] recycle_variables :
04044 #[ optimize_expression_given_Horner :
04045 */
04046
04060 void optimize_expression_given_Horner () {
04061
04062     #ifdef DEBUG
04063         MesPrint ("*** [%s, w=%w] CALL: optimize_expression_given_Horner", thetime_str().c_str());
04064     #endif
04065
04066     GETIDENTITY;
04067
04068     // initialize timer
04069     LONG start_time = TimeWallClock(1);
04070     LONG time_limit = 100 * AO.Optimize.greedytimelimit / (AO.Optimize.horner == O_MCTS ?
AO.Optimize.mctsnmkeep : 1);
04071     if (time_limit == 0) time_limit=MAXPOSITIVE;
04072
04073     // pick a Horner scheme from the list
04074     LOCK(optimize_lock);
04075     vector<WORD> Horner_scheme = optimize_best_Horner_schemes.back();
04076     optimize_best_Horner_schemes.pop_back();
04077     UNLOCK(optimize_lock);
04078
04079     // if ( ( AO.Optimize.debugflags&2 ) == 2 ) {
04080     //     MesPrint ("Scheme: %a", Horner_scheme.size(), &(Horner_scheme[0]));
04081     // }
04082
04083     // apply Horner scheme
04084     vector<WORD> tree = Horner_tree(optimize_expr, Horner_scheme);
04085
04086     // generate instructions, eventually with CSE
04087     vector<WORD> instr;
04088
04089     if (AO.Optimize.method == O_CSE || AO.Optimize.method == O_CSEGREEDY)
04090         instr = generate_instructions(tree, true);
04091     else
04092         instr = generate_instructions(tree, false);
04093     if (AO.Optimize.method == O_CSEGREEDY || AO.Optimize.method == O_GREEDY) {
04094         instr = merge_operators(instr, false);
04095         instr = optimize_greedy(instr, time_limit-(TimeWallClock(1)-start_time));
04096         instr = merge_operators(instr, true);
04097         instr = optimize_greedy(instr, time_limit-(TimeWallClock(1)-start_time));
04098     }

```

```

04099     }
04100     instr = merge_operators(instr, true);
04101
04102     // recycle the temporary variables
04103     instr = recycle_variables(instr);
04104
04105     // determine the quality of the code and possibly update the best code
04106     int num_oper = count_operators(instr);
04107
04108     LOCK(optimize_lock);
04109     if (num_oper < optimize_best_num_oper) {
04110         optimize_num_vars = Horner_scheme.size();
04111         optimize_best_num_oper = num_oper;
04112         optimize_best_instr = instr;
04113         optimize_best_vars = vector<WORD>(AN.poly_vars, AN.poly_vars+AN.poly_num_vars);
04114     }
04115     UNLOCK(optimize_lock);
04116
04117     // clean poly_vars, that are allocated by Horner_tree
04118     AN.poly_num_vars = 0;
04119     M_free(AN.poly_vars, "poly_vars");
04120
04121 #ifdef DEBUG
04122     MesPrint ("*** [%s, w=%w] DONE: optimize_expression_given_Horner", thetime_str().c_str());
04123 #endif
04124 }
04125
04126 /*
04127     #] optimize_expression_given_Horner :
04128     #[ PF_optimize_expression_given_Horner :
04129 */
04130 #ifdef WITHMPI
04131
04132 // Initialization.
04133 void PF_optimize_expression_given_Horner_master_init () {
04134     // Nothing to do for now.
04135 }
04136
04137 // Wait for an idle slave and return the process number.
04138 int PF_optimize_expression_given_Horner_master_next () {
04139     // Find an idle slave.
04140     int next;
04141     PF_LongSingleReceive(PF_ANY_SOURCE, PF_OPT_HORNER_MSGTAG, &next, NULL);
04142     return next;
04143 }
04144
04145 // The main function on the master.
04146 void PF_optimize_expression_given_Horner_master () {
04147 #ifdef DEBUG
04148     MesPrint ("*** [%s, w=%w] CALL: PF_optimize_expression_given_Horner_master",
04149         thetime_str().c_str());
04150 #endif
04151
04152     // pick a Horner scheme from the list
04153     vector<WORD> Horner_scheme = optimize_best_Horner_schemes.back();
04154     optimize_best_Horner_schemes.pop_back();
04155
04156     // Find an idle slave.
04157     int next = PF_optimize_expression_given_Horner_master_next();
04158
04159     // Send a new task to the slave.
04160     PF_PrepareLongSinglePack();
04161     int len = Horner_scheme.size();
04162     PF_LongSinglePack(&len, 1, PF_INT);
04163     PF_LongSinglePack(&Horner_scheme[0], len, PF_WORD);
04164     PF_LongSingleSend(next, PF_OPT_HORNER_MSGTAG);
04165
04166 #ifdef DEBUG
04167     MesPrint ("*** [%s, w=%w] DONE: PF_optimize_expression_given_Horner_master",
04168         thetime_str().c_str());
04169 #endif
04170 }
04171
04172 // Wait for all the slaves to finish their tasks.
04173 void PF_optimize_expression_given_Horner_master_wait () {
04174 #ifdef DEBUG
04175     MesPrint ("*** [%s, w=%w] CALL: PF_optimize_expression_given_Horner_master_wait",
04176         thetime_str().c_str());
04177 #endif
04178
04179     // Wait for all the slaves.
04180     for (int i = 1; i < PF.numtasks; i++) {

```



```

04183     int next = PF_optimize_expression_given_Horner_master_next();
04184     // Send a null task.
04185     PF_PrepareLongSinglePack();
04186     int len = 0;
04187     PF_LongSinglePack(&len, 1, PF_INT);
04188     PF_LongSingleSend(next, PF_OPT_HORNER_MSGTAG);
04189 }
04190
04191 // Combine the result from all the slaves.
04192 optimize_best_num_oper = INT_MAX;
04193 for (int i = 1; i < PF.numtasks; i++) {
04194     PF_LongSingleReceive(PF_ANY_SOURCE, PF_OPT_COLLECT_MSGTAG, NULL, NULL);
04195
04196     int len;
04197
04198     // The first integer is the number of operations.
04199     PF_LongSingleUnpack(&len, 1, PF_INT);
04200
04201     if (len >= optimize_best_num_oper) continue;
04202
04203     // Update the best result.
04204     optimize_best_num_oper = len;
04205     PF_LongSingleUnpack(&len, 1, PF_INT);
04206     optimize_best_instr.resize(len);
04207     PF_LongSingleUnpack(&optimize_best_instr[0], len, PF_WORD);
04208     PF_LongSingleUnpack(&len, 1, PF_INT);
04209     optimize_best_vars.resize(len);
04210     PF_LongSingleUnpack(&optimize_best_vars[0], len, PF_WORD);
04211
04212     optimize_num_vars = optimize_best_vars.size(); // TODO
04213 }
04214
04215 #ifdef DEBUG
04216     MesPrint ("*** [%s, w=%w] DONE: PF_optimize_expression_given_Horner_master_wait",
04217             thetime_str().c_str());
04218 #endif
04219 }
04220
04221 // The main function on the slaves.
04222 void PF_optimize_expression_given_Horner_slave () {
04223
04224     #ifdef DEBUG
04225         MesPrint ("*** [%s, w=%w] CALL: PF_optimize_expression_given_Horner_slave",
04226                 thetime_str().c_str());
04227     #endif
04228
04229     optimize_best_Horner_schemes.clear();
04230     optimize_best_num_oper = INT_MAX;
04231
04232     int dummy = 0;
04233     int len;
04234
04235     for (;;) {
04236         // Ask the master for the next task.
04237         PF_PrepareLongSinglePack();
04238         PF_LongSinglePack(&dummy, 1, PF_INT);
04239         PF_LongSingleSend(MASTER, PF_OPT_HORNER_MSGTAG);
04240
04241         // Get a task from the master.
04242         PF_LongSingleReceive(MASTER, PF_OPT_HORNER_MSGTAG, NULL, NULL);
04243
04244         // Length of the task.
04245         PF_LongSingleUnpack(&len, 1, PF_INT);
04246
04247         // No task remains.
04248         if (len == 0) break;
04249
04250         // Perform the given task.
04251         optimize_best_Horner_schemes.push_back(vector<WORD>());
04252         vector<WORD> &Horner_scheme = optimize_best_Horner_schemes.back();
04253         Horner_scheme.resize(len);
04254         PF_LongSingleUnpack(&Horner_scheme[0], len, PF_WORD);
04255         optimize_expression_given_Horner ();
04256     }
04257
04258     // Send the result to the master.
04259     PF_PrepareLongSinglePack();
04260     PF_LongSinglePack(&optimize_best_num_oper, 1, PF_INT);
04261     if (optimize_best_num_oper != INT_MAX) {
04262         len = optimize_best_instr.size();
04263         PF_LongSinglePack(&len, 1, PF_INT);
04264         PF_LongSinglePack(&optimize_best_instr[0], len, PF_WORD);
04265         len = optimize_best_vars.size();
04266         PF_LongSinglePack(&len, 1, PF_INT);
04267         PF_LongSinglePack(&optimize_best_vars[0], len, PF_WORD);
04268     }

```

```

04268     PF_LongSingleSend(MASTER, PF_OPT_COLLECT_MSGTAG);
04269
04270 #ifdef DEBUG
04271     MesPrint ("*** [%s, w=%w] DONE: PF_optimize_expression_given_Horner_slave",
04272             thetime_str().c_str());
04273 #endif
04274 }
04275
04276 #endif
04277 /*
04278     #] PF_optimize_expression_given_Horner :
04279     #[ generate_output :
04280     */
04281
04291 void generate_output (const vector<WORD> &instr, int exprnr, int extraoffset, const
    vector<vector<WORD> > &brackets) {
04292
04293 #ifdef DEBUG
04294     MesPrint ("*** [%s, w=%w] CALL: generate_output", thetime_str().c_str());
04295 #endif
04296
04297     GETIDENTITY;
04298     vector<WORD> output;
04299
04300     // one-indexed instead of zero-indexed
04301     extraoffset++;
04302     int num = 0;
04303     int maxsize = (int)instr.size();
04304     for (int i=0; i<maxsize; i+=instr[i+2]) num++;
04305     int *tstart = (int *)Malloca1(num*sizeof(int), "nplaces");
04306     num = 0;
04307     for (int i=0; i<maxsize; i+=instr[i+2]) tstart[num++] = i;
04308     for (int j=0; j<num; j++) {
04309         int i = tstart[j];
04310
04311         // copy arguments
04312         WCOPY(AT.WorkPointer, &instr[i+3], (instr[i+2]-3));
04313
04314         // update maximal variable number
04315         AO.OptimizeResult.maxvar = MAX(AO.OptimizeResult.maxvar, instr[i]+extraoffset);
04316
04317         // renumber symbols and extrasymbols to correct values
04318         for (WORD *t=AT.WorkPointer; *t!=0; t+=*t) {
04319             if (*t == ABS>(*t+*t-1)+1) continue;
04320             if (*t+1==SYMBOL) *t+3 = optimize_best_vars[*t+3];
04321             if (*t+1==EXTRASymbol) {
04322                 *t+1 = SYMBOL;
04323                 *t+3 = MAXVARIABLES-*t+3-extraoffset;
04324             }
04325         }
04326
04327         // reformat multiplication instructions, since their current
04328         // format is "expr.nr OPER_MUL length arguments", which differs
04329         // from Form's format for a product of symbols
04330         if (instr[i+1]==OPER_MUL) {
04331
04332             WORD *now=AT.WorkPointer+1;
04333             int dt;
04334             bool coeff=false;
04335             int coeff_sign=1;
04336
04337             for (WORD *t=AT.WorkPointer; *t!=0; t+=dt) {
04338                 dt = *t;
04339                 if (*t == ABS>(*t+*t-1)+1) {
04340                     // copy coefficient
04341                     memmove(AT.WorkPointer+instr[i+2], t, *t*sizeof(WORD));
04342                     coeff = true;
04343                 }
04344                 else {
04345                     // move symbol
04346                     int n = *(t+2);
04347                     memmove(now, t+1, n*sizeof(WORD));
04348                     now += n;
04349                     coeff_sign *= SGN(*t+dt-1);
04350                 }
04351             }
04352
04353             if (coeff) {
04354                 // add existing coefficient
04355                 int n = *(AT.WorkPointer + instr[i+2]) - 1;
04356                 memmove(now, AT.WorkPointer+instr[i+2]+1, n*sizeof(WORD));
04357                 now += n;
04358             }
04359             else {
04360                 // add coefficient of one
04361                 *now++=1;

```

```

04362         *now++=1;
04363         *now++=3;
04364     }
04365
04366     *(now-1) *= coeff_sign;
04367
04368     *AT.WorkPointer = now - AT.WorkPointer;
04369     *now++ = 0;
04370 }
04371
04372 // in the case of simultaneous optimization of expressions, add the
04373 // brackets to the final expression
04374 if (instr[i+1]==OPER_COMMA) {
04375     WORD *start = AT.WorkPointer + instr[i+2];
04376     WORD *now = start;
04377     int b=0;
04378     for (const WORD *t=AT.WorkPointer; *t!=0; t+=*t) {
04379         if ( ( brackets[b].size() != 0 ) && ( brackets[b][0] == 0 ) ) break;
04380         *now++ = *t + brackets[b].size();
04381         if (brackets[b].size() != 0) {
04382             memcpy(now, &brackets[b][0], brackets[b].size()*sizeof(WORD));
04383             now += brackets[b].size();
04384         }
04385         memcpy(now, t+1, (*t-1)*sizeof(WORD));
04386         now += *t-1;
04387         b++;
04388     }
04389     *now++ = 0;
04390     memmove(AT.WorkPointer, start, (now-start)*sizeof(WORD));
04391 }
04392
04393 // add the number of the extra symbol; if it is the last one,
04394 // replace the extra symbol number with the expression number
04395 if (i+instr[i+2]<(int)instr.size())
04396     output.push_back(instr[i]+extraoffset);
04397 else {
04398     output.push_back(-(exprnr+1));
04399 }
04400
04401 // add code for this symbol
04402 int n=0;
04403 while (* (AT.WorkPointer+n)!=0)
04404     n += * (AT.WorkPointer+n);
04405 n++;
04406 output.insert(output.end(), AT.WorkPointer, AT.WorkPointer+n);
04407 }
04408
04409 // trailing zero
04410 output.push_back(0);
04411
04412 // clear buffer
04413 if (AO.OptimizeResult.code != NULL)
04414     M_free(AO.OptimizeResult.code, "optimize output");
04415
04416 M_free(tstart, "nplaces");
04417
04418 // copy buffer
04419 AO.OptimizeResult.codesize = output.size();
04420 AO.OptimizeResult.code = (WORD *)Malloc1(output.size()*sizeof(WORD), "optimize output");
04421 memcpy(AO.OptimizeResult.code, &output[0], output.size()*sizeof(WORD));
04422
04423 #ifdef DEBUG
04424     MesPrint ("*** [%s, w=%w] DONE: generate_output", thetime_str().c_str());
04425 #endif
04426 }
04427
04428 /*
04429     #] generate_output :
04430     #[ generate_expression :
04431 */
04432
04440 WORD generate_expression (WORD exprnr) {
04441
04442     #ifdef DEBUG
04443         MesPrint ("*** [%s, w=%w] CALL: generate_expression", thetime_str().c_str());
04444     #endif
04445
04446     GETIDENTITY;
04447
04448     WORD *oldWorkPointer = AT.WorkPointer;
04449
04450     CBUF *C = cbuf+AC.cbufnum;
04451     WORD *term = AT.WorkPointer, oldcurexpr = AR.CurExpr;
04452     POSITION position;
04453     EXPRESSIONS e = Expressions+exprnr;
04454     SetScratch(AR.infile, &(e->onfile));
04455

```

```

04456     if ( GetTerm(BHEAD term) <= 0 ) {
04457         MesPrint("Expression %d has problems in scratchfile",exprnr);
04458         Terminate(-1);
04459     }
04460     SeekScratch(AR.outfile,&position);
04461     e->onfile = position;
04462     if ( PutOut(BHEAD term,&position,AR.outfile,0) < 0 ) {
04463         MesPrint("Expression %d has problems in output scratchfile",exprnr);
04464         Terminate(-1);
04465     }
04466
04467     AR.CurExpr = exprnr;
04468     NewSort(BHEAD0);
04469
04470     // scan for the original expression (marked by *t<0) and give the
04471     // terms to Generator
04472     WORD *t = AO.OptimizeResult.code;
04473     {
04474         WORD old = AR.Cnumlhs; AR.Cnumlhs = 0;
04475         // We can use the remaining part of the WorkSpace for every term that
04476         // goes through Generator. We have WorkSpace problems here if we use
04477         // the (modified) AT.WorkPointer every time in the loop.
04478         WORD* currentWorkPointer = AT.WorkPointer;
04479         while (*t!=0) {
04480             bool is_expr = *t < 0;
04481             t++;
04482             while (*t!=0) {
04483                 if (is_expr) {
04484                     memcpy(currentWorkPointer, t, *t*sizeof(WORD));
04485                     Generator(BHEAD currentWorkPointer, C->numlhs);
04486                 }
04487                 t+=*t;
04488             }
04489             t++;
04490         }
04491         AR.Cnumlhs = old;
04492     }
04493
04494     // final sorting
04495     if (EndSort(BHEAD NULL,0) < 0) {
04496         LowerSortLevel();
04497         Terminate(-1);
04498     }
04499
04500     AT.WorkPointer = oldWorkPointer;
04501     AR.CurExpr = oldcurexpr;
04502
04503 #ifdef DEBUG
04504     MesPrint ("*** [%s, w=%w] DONE: generate_expression", thetime_str().c_str());
04505 #endif
04506
04507     return 0;
04508 }
04509
04510 /*
04511 #] generate_expression :
04512 #[ optimize_print_code :
04513 */
04514
04524 void optimize_print_code (int print_expr) {
04525
04526 #ifdef DEBUG
04527     MesPrint ("*** [%s, w=%w] CALL: optimize_print_code", thetime_str().c_str());
04528 #endif
04529     if ( ( AO.Optimize.debugflags & 1 ) != 0 ) {
04530         /*
04531          * The next code is for debugging purposes. We may want the statements
04532          * in reverse order to substitute them all back.
04533          * Jan used a Mathematica program to do this. Here we make that
04534          * Format Ox,debugflag=1;
04535          * Creates reverse order during printing.
04536          * All we have to do is put id in front of the statements. This is done
04537          * in PrintExtraSymbol.
04538          */
04539         WORD *t = AO.OptimizeResult.code;
04540         WORD num = 0; // First we count the number of objects.
04541         while (*t!=0) {
04542             num++;
04543             t++; while (*t!=0) t+=*t; t++;
04544         }
04545         WORD **tstart = (WORD **)Malloc1(num*sizeof(WORD *),"print objects");
04546         t = AO.OptimizeResult.code; num = 0; // Now we get the addresses
04547         while (*t!=0) {
04548             tstart[num++] = t;
04549             t++; while (*t!=0) t+=*t; t++;
04550         }
04551         // Flip the addresses

```

```

04552         int halfnum = num/2;
04553         for (int i=0; i<halfnum; i++) { swap(tstart[i],tstart[num-1-i]); }
04554         for ( int i = 0; i < num; i++ ) {
04555             t = tstart[i];
04556             if (*t > 0)
04557                 PrintExtraSymbol(*t, t+1, EXTRASYMBOL);
04558             else if (print_expr)
04559                 PrintExtraSymbol(-*t-1, t+1, EXPRESSIONNUMBER);
04560         }
04561         CBUF *C = cbuf + AM.sbufnum;
04562         if (C->numrhs >= AO.OptimizeResult.minvar)
04563             PrintSubtermList(AO.OptimizeResult.minvar, C->numrhs);
04564     }
04565     else {
04566         // print extra symbols from ConvertToPoly in optimization
04567         CBUF *C = cbuf + AM.sbufnum;
04568         if (C->numrhs >= AO.OptimizeResult.minvar)
04569             PrintSubtermList(AO.OptimizeResult.minvar, C->numrhs);
04570
04571         WORD *t = AO.OptimizeResult.code;
04572         while (*t!=0) {
04573             if (*t > 0) {
04574                 PrintExtraSymbol(*t, t+1, EXTRASYMBOL);
04575             }
04576             else if (print_expr)
04577                 PrintExtraSymbol(-*t-1, t+1, EXPRESSIONNUMBER);
04578             t++;
04579             while (*t!=0) t+=*t;
04580             t++;
04581         }
04582     }
04583
04584 #ifdef DEBUG
04585     MesPrint ("*** [%s, w=%w] DONE: optimize_print_code", thetime_str().c_str());
04586 #endif
04587 }
04588
04589 /*
04590 #] optimize_print_code :
04591 #[ Optimize :
04592 */
04593
04637 int Optimize (WORD exprnr, int do_print) {
04638
04639     #if defined(WITHMPI) && (defined(DEBUG) || defined(DEBUG_MORE) || defined(DEBUG_MCTS) ||
04640         defined(DEBUG_GREEDY))
04641         // set AS.printflag negative temporary.
04642         struct save_printflag {
04643             save_printflag() {
04644                 oldprintflag = AS.printflag;
04645                 AS.printflag = -1;
04646             }
04647             ~save_printflag() {
04648                 AS.printflag = oldprintflag;
04649             }
04650             int oldprintflag;
04651         } save_printflag_;
04652     #endif
04653
04654     #ifdef DEBUG
04655         MesPrint ("*** [%s, w=%w] CALL: Optimize", thetime_str().c_str());
04656         MesPrint ("*** %"); PrintRunningTime();
04657     #endif
04658     #ifdef WITHPTHREADS
04659         optimize_lock = dummylock;
04660     #endif
04661
04662     AO.OptimizeResult.minvar = (cbuf + AM.sbufnum)->numrhs + 1;
04663
04664     if (get_expression(exprnr) < 0) return -1;
04665     vector<vector<WORD> > brackets = get_brackets();
04666
04667     #ifdef DEBUG
04668     #ifdef WITHMPI
04669         if (PF.me == MASTER)
04670     #endif
04671         MesPrint ("*** runtime after preparing the expression: %"); PrintRunningTime();
04672     #endif
04673
04674     if (optimize_expr[0]==0 ||
04675         (optimize_expr[optimize_expr[0]]==0 &&
04676         optimize_expr[0]==ABS(optimize_expr[optimize_expr[0]-1])+1) ||
04677         (optimize_expr[optimize_expr[0]]==0 && optimize_expr[0]==8 &&
04678         optimize_expr[5]==1 && optimize_expr[6]==1 && ABS(optimize_expr[7])==3)) {
04679         if (AO.OptimizeResult.code != NULL)
04679             M_free(AO.OptimizeResult.code, "optimize output");

```

```

04680
04681 // zero terms or one trivial term (number or +/-variable), so no
04682 // optimization, so copy expression; special case because without
04683 // operators the optimization crashes
04684 AO.OptimizeResult.code = (WORD *)Malloc1((optimize_expr[0]+3)*sizeof(WORD), "optimize
output");
04685 AO.OptimizeResult.code[0] = -(exprnr+1);
04686 memcpy(AO.OptimizeResult.code+1, optimize_expr, (optimize_expr[0]+1)*sizeof(WORD));
04687 AO.OptimizeResult.code[optimize_expr[0]+2] = 0;
04688 }
04689 else {
04690 // find Horner scheme(s)
04691 optimize_best_Horner_schemes.clear();
04692 if (AO.Optimize.horner == O_OCCURRENCE) {
04693     if (AO.Optimize.hornerdirection != O_BACKWARD)
04694         optimize_best_Horner_schemes.push_back(occurrence_order(optimize_expr, false));
04695     if (AO.Optimize.hornerdirection != O_FORWARD)
04696         optimize_best_Horner_schemes.push_back(occurrence_order(optimize_expr, true));
04697 }
04698 else {
04699     if (AO.Optimize.horner == O_SIMULATED_ANNEALING) {
04700         optimize_best_Horner_schemes.push_back(simulated_annealing());
04701     }
04702     else {
04703         mcts_best_schemes.clear();
04704         if (AO.inscheme) {
04705             optimize_best_Horner_schemes.push_back(vector<WORD>(AO.schemenum));
04706             for (int i=0; i < AO.schemenum; i++)
04707                 optimize_best_Horner_schemes[0][i] = AO.inscheme[i];
04708         }
04709         else {
04710             for (int i = 0; i < AO.Optimize.mctsnmrepeat; i++)
04711                 find_Horner_MCTS();
04712             // generate results
04713             for (set<pair<int, vector<WORD>>>::iterator i=mcts_best_schemes.begin();
i!=mcts_best_schemes.end(); i++) {
04714                 optimize_best_Horner_schemes.push_back(i->second);
04715 #ifdef DEBUG_MCTS
04716                 MesPrint ("{%a} -> %d", i->second.size(), &i->second[0], i->first);
04717 #endif
04718             }
04719             // clear the tree by making a new empty one.
04720             mcts_root = tree_node();
04721         }
04722     }
04723 }
04724 #ifdef DEBUG
04725 #ifdef WITHMPI
04726     if (PF.me == MASTER)
04727 #endif
04728     MesPrint ("*** runtime after Horner: %"); PrintRunningTime();
04729 #endif
04730
04731 #ifdef WITHMPI
04732     if (PF.me == MASTER) {
04733         PF_optimize_expression_given_Horner_master_init();
04734     }
04735 #endif
04736 // find best Horner scheme and results
04737 optimize_best_num_oper = INT_MAX;
04738
04739 int imax = (int)optimize_best_Horner_schemes.size();
04740
04741 for (int i=0; i<imax; i++) {
04742 #if defined(WITHPTHREADS)
04743     if (AM.totalnumberofthreads > 1)
04744         optimize_expression_given_Horner_threaded();
04745     else
04746 #elif defined(WITHMPI)
04747         if (PF.numtasks > 1)
04748             PF_optimize_expression_given_Horner_master();
04749         else
04750 #endif
04751         optimize_expression_given_Horner();
04752 }
04753
04754 #ifdef WITHMPI
04755     PF_optimize_expression_given_Horner_master_wait();
04756 }
04757 else {
04758     if (PF.numtasks > 1)
04759         PF_optimize_expression_given_Horner_slave();
04760 }
04761 #endif
04762
04763 #ifdef WITHPTHREADS
04764     MasterWaitAll();

```

```

04765 #endif
04766 // format results, then print it (for "Print") or modify
04767 // expression (for "#Optimize")
04768 #ifdef WITHMPI
04769     if (PF.me == MASTER)
04770 #endif
04771     generate_output(optimize_best_instr, exprnr, cbuf[AM.sbufnum].numrhs, brackets);
04772 #ifdef WITHMPI
04773     else {
04774         // non-null dummy code for slaves
04775         if (AO.OptimizeResult.code == NULL) {
04776             AO.OptimizeResult.code = (WORD *)Malloc1(sizeof(WORD), "optimize output");
04777         }
04778     }
04779 #endif
04780 }
04781
04782 #ifdef WITHMPI
04783     if (PF.me == MASTER) {
04784         PF_PrepPack();
04785         PF_Pack(&AO.OptimizeResult.minvar, 1, PF_WORD);
04786         PF_Pack(&AO.OptimizeResult.maxvar, 1, PF_WORD);
04787     }
04788     PF_Broadcast();
04789     if (PF.me != MASTER) {
04790         PF_Unpack(&AO.OptimizeResult.minvar, 1, PF_WORD);
04791         PF_Unpack(&AO.OptimizeResult.maxvar, 1, PF_WORD);
04792     }
04793 #endif
04794
04795 // set preprocessor variables
04796 char str[100];
04797 snprintf(str, 100, "%d", AO.OptimizeResult.minvar);
04798 PutPreVar((UBYTE *) "optimminvar_", (UBYTE *) str, 0, 1);
04799 snprintf(str, 100, "%d", AO.OptimizeResult.maxvar);
04800 PutPreVar((UBYTE *) "optimmaxvar_", (UBYTE *) str, 0, 1);
04801
04802 if (do_print) {
04803 #ifdef WITHMPI
04804     if (PF.me == MASTER)
04805 #endif
04806     optimize_print_code(1);
04807     ClearOptimize();
04808 }
04809 else {
04810 #ifdef WITHMPI
04811     if (PF.me == MASTER)
04812 #endif
04813     generate_expression(exprnr);
04814 }
04815
04816 #ifdef WITHMPI
04817     if (PF.me == MASTER) {
04818 #endif
04819
04820     if (AO.Optimize.printstats > 0) {
04821         char str[20];
04822         MesPrint("");
04823         count_operators(optimize_expr, true);
04824         int numop = count_operators(optimize_best_instr, true);
04825         snprintf(str, 20, "%d", numop);
04826         PutPreVar((UBYTE *) "optimvalue_", (UBYTE *) str, 0, 1);
04827     }
04828     else {
04829         char str[20];
04830         int numop = count_operators(optimize_best_instr, false);
04831         snprintf(str, 20, "%d", numop);
04832         PutPreVar((UBYTE *) "optimvalue_", (UBYTE *) str, 0, 1);
04833     }
04834
04835     if ( ( AO.Optimize.schemeflags & 1 ) == 1 ) {
04836         GETIDENTITY
04837         UBYTE *OutScr, *Out, *old1 = AO.OutputLine, *old2 = AO.OutFill;
04838         int i, sym;
04839         AO.OutputLine = AO.OutFill = (UBYTE *) AT.WorkPointer;
04840         FiniLine();
04841         OutScr = (UBYTE *) AT.WorkPointer + ( TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer) ) / 2;
04842         TokenToLine((UBYTE *) " Scheme selected: ");
04843         for ( i = 0; i < optimize_num_vars; i++ ) {
04844             Out = OutScr;
04845             sym = optimize_best_vars[i];
04846             if ( i > 0 ) TokenToLine((UBYTE *) ",");
04847             if ( sym < NumSymbols ) {
04848                 StrCopy(FindSymbol(sym), OutScr);
04849             }
04850             /* StrCopy(VARNAME(symbols, sym), OutScr); */
04851         }
04852     }
04853 }
04854 }
04855 }

```

```

04852         Out = StrCopy((UBYTE *)AC.extrasym,Out);
04853         if ( AC.extrasymbols == 0 ) {
04854             Out = NumCopy((MAXVARIABLES-sym),Out);
04855             Out = StrCopy((UBYTE *)"_",Out);
04856         }
04857         else if ( AC.extrasymbols == 1 ) {
04858             Out = AddArrayIndex((MAXVARIABLES-sym),Out);
04859         }
04860     }
04861     TokenToLine(OutScr);
04862 }
04863 TokenToLine((UBYTE *)");");
04864 FiniLine();
04865 AO.OutFill = old2;
04866 AO.OutputLine = old1;
04867 }
04868
04869 {
04870     GETIDENTITY
04871     UBYTE *OutScr, *Out, *outstring = 0;
04872     int i, sym;
04873     AO.OutputLine = AO.OutFill = (UBYTE *)AT.WorkPointer;
04874     OutScr = (UBYTE *)AT.WorkPointer + ( TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer) ) /2;
04875     for ( i = 0; i < optimize_num_vars; i++ ) {
04876         Out = OutScr;
04877         sym = optimize_best_vars[i];
04878         if ( sym < NumSymbols ) {
04879             StrCopy(FindSymbol(sym),OutScr);
04880             /* StrCopy(VARNAME(symbols,sym),OutScr); */
04881         }
04882         else {
04883             Out = StrCopy((UBYTE *)AC.extrasym,Out);
04884             if ( AC.extrasymbols == 0 ) {
04885                 Out = NumCopy((MAXVARIABLES-sym),Out);
04886                 Out = StrCopy((UBYTE *)"_",Out);
04887             }
04888             else if ( AC.extrasymbols == 1 ) {
04889                 Out = AddArrayIndex((MAXVARIABLES-sym),Out);
04890             }
04891         }
04892         outstring = AddToString(outstring,OutScr,1);
04893     }
04894     if ( outstring == 0 ) {
04895         PutPreVar((UBYTE *)"optimscheme_",(UBYTE *)"",0,1);
04896     }
04897     else {
04898         PutPreVar((UBYTE *)"optimscheme_",(UBYTE *)outstring,0,1);
04899         M_free(outstring,"AddToString");
04900     }
04901 }
04902
04903 #ifdef WITHMPI
04904 }
04905
04906 // synchronize optimvalue_ and optimscheme_
04907 if ( PF.me == MASTER ) {
04908     UBYTE *value;
04909     int bytes;
04910
04911     PF_PrepareLongMultiPack();
04912
04913     value = GetPreVar((UBYTE *)"optimvalue_", WITHERROR);
04914     bytes = strlen((char *)value);
04915     PF_LongMultiPack(&bytes, 1, PF_INT);
04916     PF_LongMultiPack(value, bytes, PF_BYTE);
04917
04918     value = GetPreVar((UBYTE *)"optimscheme_", WITHERROR);
04919     bytes = strlen((char *)value);
04920     PF_LongMultiPack(&bytes, 1, PF_INT);
04921     PF_LongMultiPack(value, bytes, PF_BYTE);
04922 }
04923 PF_LongMultiBroadcast();
04924 if ( PF.me != MASTER ) {
04925     static vector<UBYTE> prevarbuf;
04926     UBYTE *value;
04927     int bytes;
04928
04929     PF_LongMultiUnpack(&bytes, 1, PF_INT);
04930     prevarbuf.reserve(bytes + 1);
04931     value = &prevarbuf[0];
04932     PF_LongMultiUnpack(value, bytes, PF_BYTE);
04933     value[bytes] = '\0'; // null terminator
04934     PutPreVar((UBYTE *)"optimvalue_", value, NULL, 1);
04935
04936     PF_LongMultiUnpack(&bytes, 1, PF_INT);
04937     prevarbuf.reserve(bytes + 1);
04938     value = &prevarbuf[0];

```



```

04939     PF_LongMultiUnpack(value, bytes, PF_BYTE);
04940     value[bytes] = '\0'; // null terminator
04941     PutPreVar((UBYTE *)"optimscheme_", value, NULL, 1);
04942 }
04943 #endif
04944
04945 // cleanup
04946 M_free(optimize_expr, "LoadOptim");
04947
04948 #ifdef DEBUG
04949     MesPrint ("*** [%s, w=%w] DONE: Optimize", thetime_str().c_str());
04950 #endif
04951
04952     return 0;
04953 }
04954
04955 /*
04956 #] Optimize :
04957 #[ ClearOptimize :
04958 */
04959
04974 int ClearOptimize()
04975 {
04976     char str[20];
04977     WORD numexpr, *w;
04978     int error = 0;
04979     if ( AO.OptimizeResult.code != NULL ) {
04980         M_free(AO.OptimizeResult.code, "optimize output");
04981         AO.OptimizeResult.code = NULL;
04982         AO.OptimizeResult.codesize = 0;
04983         PutPreVar((UBYTE *)"optimminvar_", (UBYTE *)("0"), 0, 1);
04984         PutPreVar((UBYTE *)"optimmaxvar_", (UBYTE *)("0"), 0, 1);
04985         PruneExtraSymbols(AO.OptimizeResult.minvar-1);
04986         cbuf[AM.sbufnum].numrhs = AO.OptimizeResult.minvar-1;
04987         AO.OptimizeResult.minvar = AO.OptimizeResult.maxvar = 0;
04988     }
04989     if ( AO.OptimizeResult.nameofexpr != NULL ) {
04990 /*
04991         We have to pick up the expression by its name. Numbers may change.
04992         Note that this requires that when we overwrite an expression, we
04993         check that it is not an optimized expression. See execute.c and
04994         comexpr.c
04995 */
04996         if ( GetName(AC.exprnames, AO.OptimizeResult.nameofexpr, &numexpr, NOAUTO) != CEXPRESSION ) {
04997             MesPrint("@Internal error while clearing optimized expression %s",
04998 AO.OptimizeResult.nameofexpr);
04999             Terminate(-1);
05000         }
05001         M_free(AO.OptimizeResult.nameofexpr, "optimize expression name");
05002         AO.OptimizeResult.nameofexpr = NULL;
05003         w = &(Expressions[numexpr].status);
05004         *w = SetExprCases(DROP, 1, *w);
05005         if ( *w < 0 ) error = 1;
05006     }
05007     sprintf (str, 20, "%d", cbuf[AM.sbufnum].numrhs);
05008     PutPreVar(AM.oldnumextrasyms, (UBYTE *)str, 0, 1);
05009     PutPreVar((UBYTE *)"optimvalue_", (UBYTE *)("0"), 0, 1);
05010     PutPreVar((UBYTE *)"optimscheme_", (UBYTE *)("0"), 0, 1);
05011     return(error);
05012 }
05013 /*
05014 #] ClearOptimize :
05015 */

```


4.97 parallel.c File Reference

```

#include "form3.h"
#include "vector.h"

```

Include dependency graph for parallel.c:

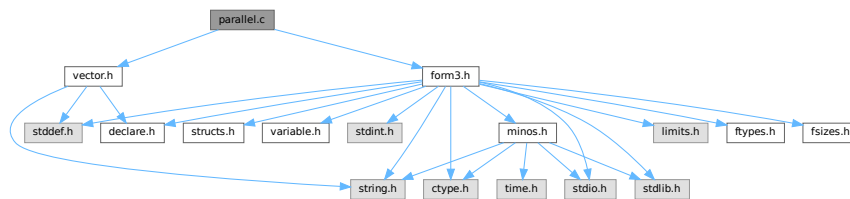

Data Structures

- struct [NoDe](#)
- struct [dollar_buf](#)
- struct [bufIPstruct](#)

Macros

- `#define PRINTFBUF(TEXT, TERM, SIZE) {}`
- `#define SWAP(x, y)`
- `#define PACK\_LONG(p, n)`
- `#define UNPACK\_LONG(p, n)`
- `#define CHECK(condition) _CHECK(condition, __FILE__, __LINE__)`
- `#define \_CHECK(condition, file, line) __CHECK(condition, file, line)`
- `#define \_\_CHECK(condition, file, line)`
- `#define DBGOUT(lv1, lv2, a) do { if ( lv1 >= lv2 ) { printf a; fflush(stdout); } } while (0)`
- `#define DBGOUT\_NINTERMS(lv, a)`
- `#define PF\_STATS\_SIZE 5`
- `#define PF\_SNDFILEBUFSIZE 4096`
- `#define recvBuffer logBuffer /* (master) The buffer for receiving messages. */`

Typedefs

- typedef struct [NoDe](#) [NODE](#)
- typedef struct [bufIPstruct](#) [bufIPstruct_t](#)

Functions

- LONG [PF_RealTime](#) (int)
- int [PF_LibInit](#) (int *, char ***)
- int [PF_LibTerminate](#) (int)
- int [PF_Probe](#) (int *)
- int [PF_RecvWbuf](#) (WORD *, LONG *, int *)
- int [PF_IRecvRbuf](#) ([PF_BUFFER](#) *, int, int)
- int [PF_WaitRbuf](#) ([PF_BUFFER](#) *, int, LONG *)
- int [PF_RawSend](#) (int dest, void *buf, LONG l, int tag)
- LONG [PF_RawRecv](#) (int *src, void *buf, LONG thesize, int *tag)
- int [PF_RawProbe](#) (int *src, int *tag, int *bytesize)
- int [PF_EndSort](#) (void)

- WORD [PF_Deferred](#) (WORD *term, WORD level)
- int [PF_Processor](#) (EXPRESSIONS e, WORD i, WORD LastExpression)
- int [PF_Init](#) (int *argc, char ***argv)
- int [PF_Terminate](#) (int errorcode)
- LONG [PF_GetSlaveTimes](#) (void)
- LONG [PF_BroadcastNumber](#) (LONG x)
- void [PF_BroadcastBuffer](#) (WORD **buffer, LONG *length)
- int [PF_BroadcastString](#) (UBYTE *str)
- int [PF_BroadcastPreDollar](#) (WORD **dbuffer, LONG *newsize, int *numterms)
- int [PF_CollectModifiedDollars](#) (void)
- int [PF_BroadcastModifiedDollars](#) (void)
- int [PF_BroadcastRedefinedPreVars](#) (void)
- int [PF_StoreInsideInfo](#) (void)
- int [PF_RestoreInsideInfo](#) (void)
- int [PF_BroadcastCBuf](#) (int bufnum)
- int [PF_BroadcastExpFlags](#) (void)
- int [PF_BroadcastExpr](#) (EXPRESSIONS e, FILEHANDLE *file)
- int [PF_BroadcastRHS](#) (void)
- int [PF_InParallelProcessor](#) (void)
- int [PF_SendFile](#) (int to, FILE *fd)
- int [PF_RecvFile](#) (int from, FILE *fd)
- void [PF_MLock](#) (void)
- void [PF_MUnlock](#) (void)
- LONG [PF_WriteFileToFile](#) (int handle, UBYTE *buffer, LONG size)
- void [PF_FlushStdOutBuffer](#) (void)
- void [PF_FreeErrorMessageBuffers](#) (void)

Variables

- [PARALLELVAR](#) PF

4.97.1 Detailed Description

Message passing library independent functions of parform

This file contains functions needed for the parallel version of form3 these functions need no real link to the message passing libraries, they only need some interface dependent preprocessor definitions (check [parallel.h](#)). So there still need two different objectfiles to be compiled for mpi and pvm!

Definition in file [parallel.c](#).

4.97.2 Macro Definition Documentation

4.97.2.1 PRINTFBUF

```
#define PRINTFBUF(
    TEXT,
    TERM,
    SIZE ) {}
```

Definition at line 117 of file [parallel.c](#).

4.97.2.2 SWAP

```
#define SWAP(
    x,
    y )
```

Value:

```
do { \
    char swap_tmp__[sizeof(x) == sizeof(y) ? (int)sizeof(x) : -1]; \
    memcpy(swap_tmp__, &y, sizeof(x)); \
    memcpy(&y, &x, sizeof(x)); \
    memcpy(&x, swap_tmp__, sizeof(x)); \
} while (0)
```

Swaps the variables *x* and *y*. If `sizeof(x) != sizeof(y)` then a compilation error will occur. A set of `memcpy` calls with constant sizes is expected to be inlined by the optimisation.

Definition at line 124 of file [parallel.c](#).

4.97.2.3 PACK_LONG

```
#define PACK_LONG(
    p,
    n )
```

Value:

```
do { \
    *p)++ = (UWORD)((ULONG)(n) & (ULONG)WORDMASK); \
    *p)++ = (UWORD)((ULONG)(n) >> BITSINWORD) & (ULONG)WORDMASK); \
} while (0)
```

Packs a LONG value *n* to a WORD buffer *p*.

Definition at line 135 of file [parallel.c](#).

4.97.2.4 UNPACK_LONG

```
#define UNPACK_LONG(
    p,
    n )
```

Value:

```
do { \
    (n) = (LONG)((((ULONG)(p)[1] & (ULONG)WORDMASK) << BITSINWORD) | ((ULONG)(p)[0] & (ULONG)WORDMASK)); \
    (p) += 2; \
} while (0)
```

Unpacks a LONG value *n* from a WORD buffer *p*.

Definition at line 144 of file [parallel.c](#).

4.97.2.5 CHECK

```
#define CHECK(
    condition ) _CHECK(condition, __FILE__, __LINE__)
```

A simple check for unrecoverable errors.

Definition at line 153 of file [parallel.c](#).

4.97.2.6 _CHECK

```
#define _CHECK(  
    condition,  
    file,  
    line ) __CHECK(condition, file, line)
```

Definition at line 154 of file [parallel.c](#).

4.97.2.7 __CHECK

```
#define __CHECK(  
    condition,  
    file,  
    line )
```

Value:

```
do { \  
    if ( !(condition) ) { \  
        Error0("Fatal error at " file ":" #line); \  
        Terminate(-1); \  
    } \  
} while (0)
```

Definition at line 155 of file [parallel.c](#).

4.97.2.8 DBGOUT

```
#define DBGOUT(  
    lv1,  
    lv2,  
    a ) do { if ( lv1 >= lv2 ) { printf a; fflush(stdout); } } while (0)
```

Definition at line 166 of file [parallel.c](#).

4.97.2.9 DBGOUT_NINTERMS

```
#define DBGOUT_NINTERMS(  
    lv,  
    a )
```

Definition at line 169 of file [parallel.c](#).

4.97.2.10 PF_STATS_SIZE

```
#define PF_STATS_SIZE 5
```

Definition at line 178 of file [parallel.c](#).

4.97.2.11 PF_SNDFILEBUFSIZE

```
#define PF_SNDFILEBUFSIZE 4096
```

Definition at line 4211 of file [parallel.c](#).

4.97.2.12 recvBuffer

```
#define recvBuffer logBuffer /* (master) The buffer for receiving messages. */
```

Definition at line 4319 of file [parallel.c](#).

4.97.3 Typedef Documentation

4.97.3.1 NODE

```
typedef struct NoDe NODE
```

A node for the tree of losers in the final sorting on the master.

4.97.4 Function Documentation

4.97.4.1 PF_RealTime()

```
LONG PF_RealTime (  
    int i )
```

Returns the realtime in 1/100 sec. as a LONG.

Parameters

<i>i</i>	the timer will be reset if <code>i == 0</code> .
----------	--

Returns

the real elapsed time in 1/100 second.

Definition at line 101 of file [mpi.c](#).

Referenced by [PF_Init\(\)](#).

4.97.4.2 PF_LibInit()

```
int PF_LibInit (  
    int * argcp,  
    char *** argvp )
```

Performs all library dependent initializations.

Parameters

<i>argcp</i>	pointer to the number of arguments.
<i>argvp</i>	pointer to the arguments.

Returns

0 if OK, nonzero on error.

Definition at line 123 of file [mpi.c](#).

Referenced by [PF_Init\(\)](#).

4.97.4.3 PF_LibTerminate()

```
int PF_LibTerminate (  
    int error )
```

Exits mpi, when there is an error either indicated or happening, returnvalue is 1, else returnvalue is 0.

Parameters

<i>error</i>	an error code.
--------------	----------------

Returns

0 if OK, nonzero on error.

Definition at line 209 of file [mpi.c](#).

Referenced by [PF_Terminate\(\)](#).

4.97.4.4 PF_Probe()

```
int PF_Probe (  
    int * src )
```

Probes the next incoming message. If `src == PF_ANY_SOURCE` this operation is blocking, otherwise nonblocking.

Parameters

<i>in, out</i>	<i>src</i>	the source process number. In output, the process number of actual found source.
----------------	------------	--

Returns

the tag value of the next incoming message if found, 0 if a nonblocking probe (input `src != PF_ANY_SOURCE`) did not find any messages. A negative returned value indicates an error.

Definition at line 230 of file [mpi.c](#).

4.97.4.5 PF_RecvWbuf()

```
int PF_RecvWbuf (
    WORD * b,
    LONG * s,
    int * src )
```

Blocking receive of a WORD buffer.

Parameters

out	<i>b</i>	the buffer to store the received data.
in, out	<i>s</i>	the size of the buffer. The output value is the actual size of the received data.
in, out	<i>src</i>	the source process number. The output value is the process number of actual source.

Returns

the received message tag. A negative value indicates an error.

Definition at line 337 of file [mpi.c](#).

4.97.4.6 PF_IRecvRbuf()

```
int PF_IRecvRbuf (
    PF_BUFFER * r,
    int bn,
    int from )
```

Posts nonblocking receive for the active receive buffer. The buffer is filled from `full` to `stop`.

Parameters

<i>r</i>	the PF_BUFFER struct for the nonblocking receive.
<i>bn</i>	the index of the cyclic buffer.
<i>from</i>	the source process number.

Returns

0 if OK, nonzero on error.

Definition at line 366 of file [mpi.c](#).

4.97.4.7 PF_WaitRbuf()

```
int PF_WaitRbuf (
    PF_BUFFER * r,
    int bn,
    LONG * size )
```

Waits for the buffer *bn* to finish a pending nonblocking receive. It returns the received tag and in **size* the number of field received. If the receive is already finished, just return the flag and size, else wait for it to finish, but also check for other pending receives.

Parameters

	<i>r</i>	the PF_BUFFER struct for the pending nonblocking receive.
	<i>bn</i>	the index of the cyclic buffer.
out	<i>size</i>	the actual size of received data.

Returns

the received message tag. A negative value indicates an error.

Definition at line [400](#) of file [mpi.c](#).

4.97.4.8 PF_RawSend()

```
int PF_RawSend (
    int dest,
    void * buf,
    LONG l,
    int tag )
```

Sends *l* bytes from *buf* to *dest*. Returns 0 on success, or -1.

Parameters

<i>dest</i>	the destination process number.
<i>buf</i>	the send buffer.
<i>l</i>	the size of data in the send buffer in bytes.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line [463](#) of file [mpi.c](#).

Referenced by [PF_MUnlock\(\)](#), and [PF_SendFile\(\)](#).

4.97.4.9 PF_RawRecv()

```
LONG PF_RawRecv (
    int * src,
    void * buf,
    LONG thesize,
    int * tag )
```

Receives not more than *thesize* bytes from *src*, returns the actual number of received bytes, or -1 on failure.

Parameters

in, out	<i>src</i>	the source process number. In output, that of the actual received message.
out	<i>buf</i>	the receive buffer.
	<i>thesize</i>	the size of the receive buffer in bytes.
out	<i>tag</i>	the message tag of the actual received message.

Returns

the actual sizeof received data in bytes, or -1 on failure.

Definition at line 484 of file [mpi.c](#).

Referenced by [PF_RecvFile\(\)](#).

4.97.4.10 PF_RawProbe()

```
int PF_RawProbe (
    int * src,
    int * tag,
    int * bytesize )
```

Probes an incoming message.

Parameters

in, out	<i>src</i>	the source process number. In output, that of the actual received message.
in, out	<i>tag</i>	the message tag. In output, that of the actual received message.
out	<i>bytesize</i>	the size of incoming data in bytes.

Returns

0 if OK, nonzero on error.

Definition at line 508 of file [mpi.c](#).

4.97.4.11 PF_EndSort()

```
int PF_EndSort (
    void )
```

Finishes a master sorting with collecting terms from slaves. Called by [EndSort\(\)](#).

If this is not the masterprocess, just initialize the sendbuffers and return 0, else [PF_EndSort\(\)](#) sends the rest of the terms in the sendbuffer to the next slave and a dummy message to all slaves with tag PF_ENDSORT_MSGTAG. Then it receives the sorted terms, sorts them using a recursive 'tree of losers' ([PF_GetLoser\(\)](#)) and writes them to the outputfile.

Returns

1 if the sorting on the master was done. 0 if [EndSort\(\)](#) still must perform a regular sorting because it is not at the ground level or not on the master or in the sequential mode or in the InParallel mode. -1 if an error occurred.

Remarks

The slaves will send the sorted terms back to the master in the regular sorting (after the initialization of the send buffer in [PF_EndSort\(\)](#)). See [PutOut\(\)](#) and [FlushOut\(\)](#).


This function has been changed such that when it returns 1, AM.S0->TermsLeft is set correctly. But AM.S0->GenTerms is not set: it will be set after collecting the statistics from the slaves at the end of [PF_Processor\(\)](#). (TU 30 Jun 2011)

Definition at line 864 of file [parallel.c](#).

References [FlushOut\(\)](#), and [PutOut\(\)](#).

Referenced by [EndSort\(\)](#).

Here is the call graph for this function:

**4.97.4.12 PF_Deferred()**

```
WORD PF_Deferred (
    WORD * term,
    WORD level )
```

Replaces [Deferred\(\)](#) on the slaves.

Parameters

<i>term</i>	the term that must be multiplied by the contents of the current bracket.
<i>level</i>	the compiler level.

Returns


0 if OK, nonzero on error.

Definition at line 1208 of file [parallel.c](#).

References [Generator\(\)](#), and [InsertTerm\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

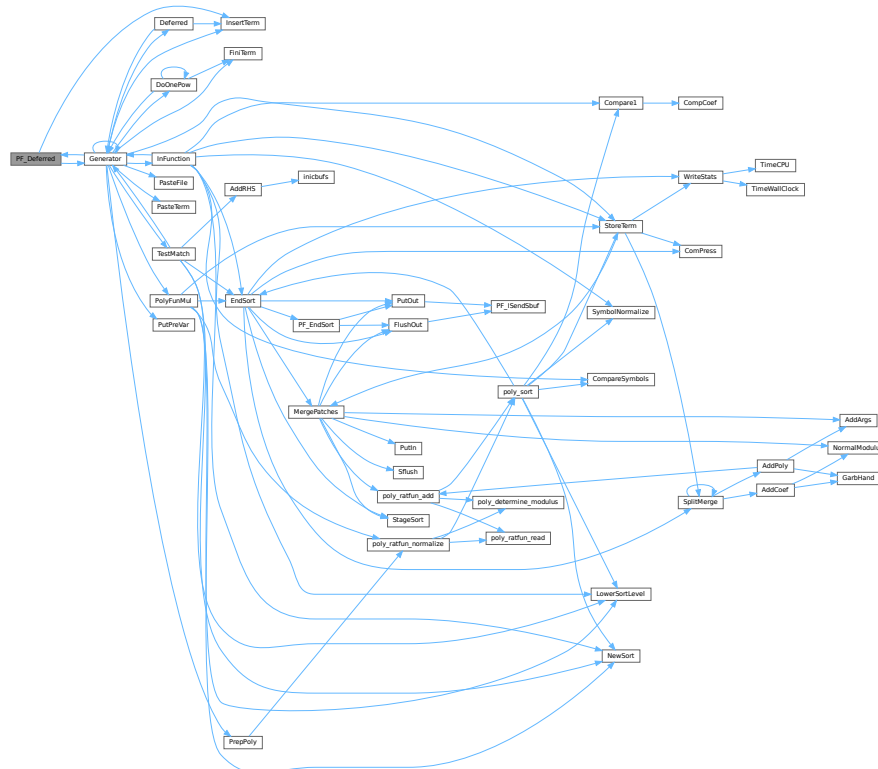

4.97.4.13 PF_Processor()

```
int PF_Processor (
    EXPRESSIONS e,
    WORD i,
    WORD LastExpression )
```

Replaces parts of [Processor\(\)](#) on the masters and slaves. On the master [PF_Processor\(\)](#) is responsible for proper distribution of terms from the input file to the slaves. On the slaves it calls [Generator\(\)](#) for all the terms that this process gets, but [PF_GetTerm\(\)](#) gets terms from the master (not directly from infile).

Parameters

<i>e</i>	The pointer to the current expression.
<i>i</i>	The index for the current expression.
<i>LastExpression</i>	The flag indicating whether it is the last expression.

Returns


0 if OK, nonzero on error.

Definition at line 1540 of file [parallel.c](#).

References [EndSort\(\)](#), [Generator\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [PACK_LONG](#), [PF_BroadcastRedefinedPreVars\(\)](#), [PF_ISendSbuf\(\)](#), [PF_LongSinglePack\(\)](#), [PF_LongSingleReceive\(\)](#), [PF_LongSingleSend\(\)](#), [PF_LongSingleUnpack\(\)](#), [PF_PrepareLongSinglePack\(\)](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [PutOut\(\)](#), [StoreTerm\(\)](#), [SWAP](#), [TimeCPU\(\)](#), and [WriteStats\(\)](#).

Referenced by [Processor\(\)](#).

Here is the call graph for this function:

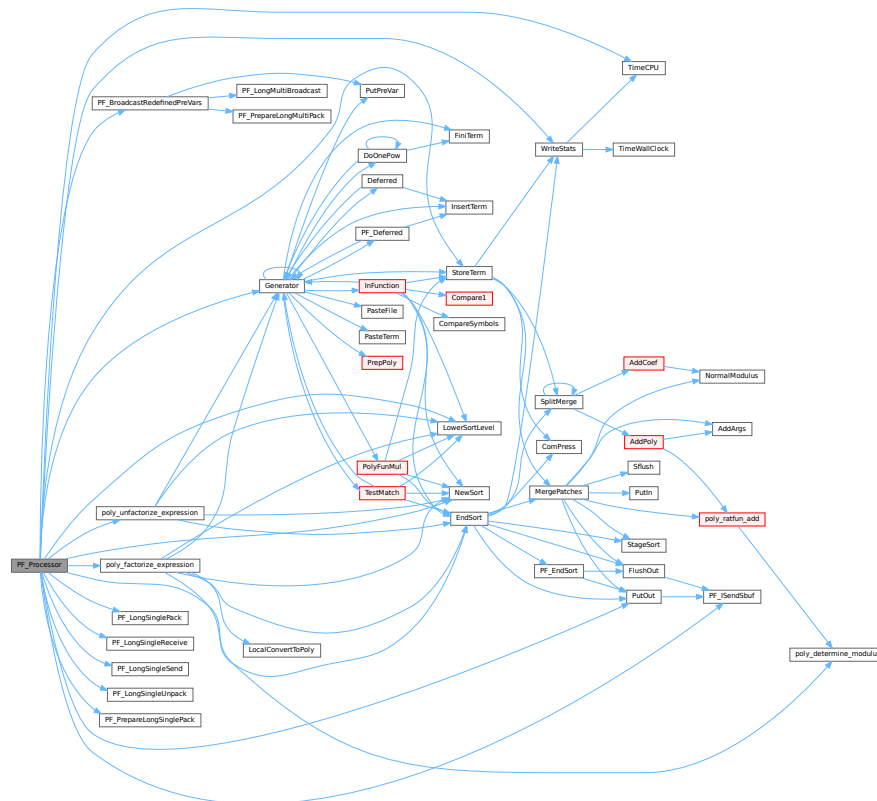

4.97.4.14 PF_Init()

```
int PF_Init (
    int * argc,
    char *** argv )
```

All the library independent stuff. [PF_LibInit\(\)](#) should do all library dependent initializations.

Parameters

<i>argc</i>	pointer to the number of arguments.
<i>argv</i>	pointer to the arguments.


Returns

0 if OK, nonzero on error.

Definition at line 1963 of file [parallel.c](#).

References [PF_Broadcast\(\)](#), [PF_LibInit\(\)](#), [PF_Pack\(\)](#), [PF_PreparePack\(\)](#), [PF_RealTime\(\)](#), and [PF_Unpack\(\)](#).

Here is the call graph for this function:

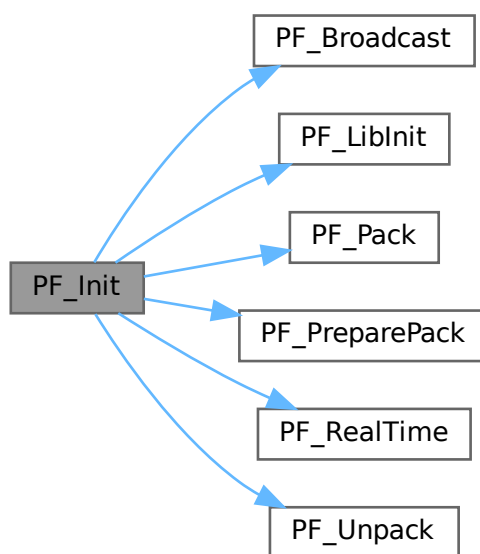**4.97.4.15 PF_Terminate()**

```
int PF_Terminate (
    int errorcode )
```

Performs the finalization of ParFORM. To be called by `Terminate()`.

Parameters

<i>error</i>	an error code.
--------------	----------------


Returns

0 if OK, nonzero on error.

Definition at line 2058 of file [parallel.c](#).

References [PF_LibTerminate\(\)](#).

Here is the call graph for this function:



4.97.4.16 PF_GetSlaveTimes()

```
LONG PF_GetSlaveTimes (
    void )
```

Returns the total CPU time of all slaves together. This function must be called on the master and all slaves.

Returns

on the master, the sum of CPU times on all slaves.

Definition at line 2074 of file [parallel.c](#).

References [TimeCPU\(\)](#).

Here is the call graph for this function:



4.97.4.17 PF_BroadcastNumber()

```
LONG PF_BroadcastNumber (
    LONG x )
```

Broadcasts a LONG value from the master to the all slaves.

Parameters

x	the number to be broadcast (set on the master).
---	---

Returns


the synchronised result.

Definition at line 2094 of file [parallel.c](#).

References [PF_Bcast\(\)](#).

Referenced by [DoCheckpoint\(\)](#), [PF_BroadcastBuffer\(\)](#), and [StartVariables\(\)](#).

Here is the call graph for this function:

**4.97.4.18 PF_BroadcastBuffer()**

```

void PF_BroadcastBuffer (
    WORD ** buffer,
    LONG * length )
  
```

Broadcasts a buffer from the master to all the slaves.


Parameters

<i>in, out</i>	<i>buffer</i>	on the master, the buffer to be broadcast. On the slaves, the buffer will be allocated if the length is greater than 0. The caller must free it.
<i>in, out</i>	<i>length</i>	on the master, the length of the buffer to be broadcast. On the slaves, it receives the length of transferred buffer. The actual transfer occurs only if the length is greater than 0.

Definition at line 2121 of file [parallel.c](#).

References [PF_Bcast\(\)](#), and [PF_BroadcastNumber\(\)](#).

Here is the call graph for this function:



4.97.4.19 PF_BroadcastString()

```
int PF_BroadcastString (
    UBYTE * str )
```

Broadcasts a string from the master to all slaves.

Parameters

<i>in, out</i>	<i>str</i>	The pointer to a null-terminated string.
----------------	------------	--


Returns

0 if OK, nonzero on error.

Definition at line 2163 of file [parallel.c](#).

References [PF_Broadcast\(\)](#), [PF_PackString\(\)](#), [PF_PreparePack\(\)](#), and [PF_UnpackString\(\)](#).

Here is the call graph for this function:

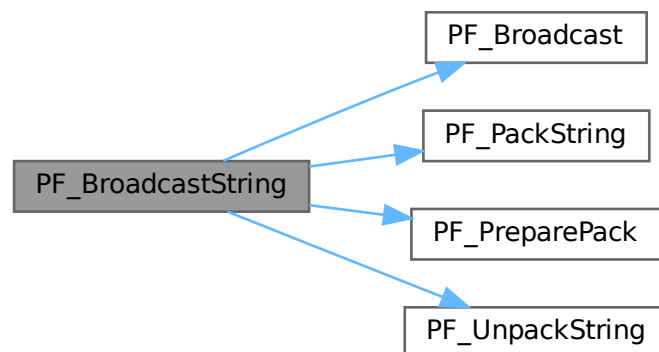**4.97.4.20 PF_BroadcastPreDollar()**

```
int PF_BroadcastPreDollar (
    WORD ** dbuffer,
    LONG * newsize,
    int * numterms )
```

Broadcasts dollar variables set as a preprocessor variables. Only the master is able to make an assignment like `#$a=g;` where `g` is an expression: only the master has an access to the expression. So, the master broadcasts the result to slaves.

The result is in `*dbuffer` of the size is `*newsize` (in number of WORDs), +1 for trailing zero. For slave `newsize` and `numterms` are output parameters.

Parameters

<i>in, out</i>	<i>dbuffer</i>	the buffer for a dollar variable.
<i>in, out</i>	<i>newsize</i>	the size of the dollar variable in WORDs.
<i>in, out</i>	<i>numterms</i>	the number of terms in the dollar variable.


Returns

0 if OK, nonzero on error.

Definition at line 2218 of file [parallel.c](#).

References [PF_Broadcast\(\)](#), [PF_Pack\(\)](#), [PF_PreparePack\(\)](#), and [PF_Unpack\(\)](#).

Here is the call graph for this function:

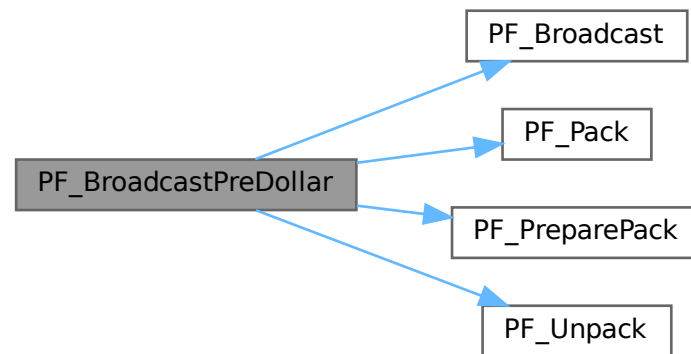**4.97.4.21 PF_CollectModifiedDollars()**

```
int PF_CollectModifiedDollars (
    void )
```

Combines modified dollar variables on the all slaves, and store them into those on the master.

The potentially modified dollar variables are given in `PotModdollars`, and the number of them is given by `NumPotModdollars`.

The current module could be executed in parallel only if all potentially modified variables are listed in `ModOptdollars`, otherwise the module was switched to the sequential mode.


Returns

0 if OK, nonzero on error.

Definition at line 2505 of file [parallel.c](#).

References [EndSort\(\)](#), [Generator\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [PF_LongSinglePack\(\)](#), [PF_LongSingleReceive\(\)](#), [PF_LongSingleSend\(\)](#), [PF_LongSingleUnpack\(\)](#), [PF_PrepareLongSinglePack\(\)](#), [VectorInit](#), [VectorPtr](#), [VectorReserve](#), and [VectorSize](#).

Here is the call graph for this function:

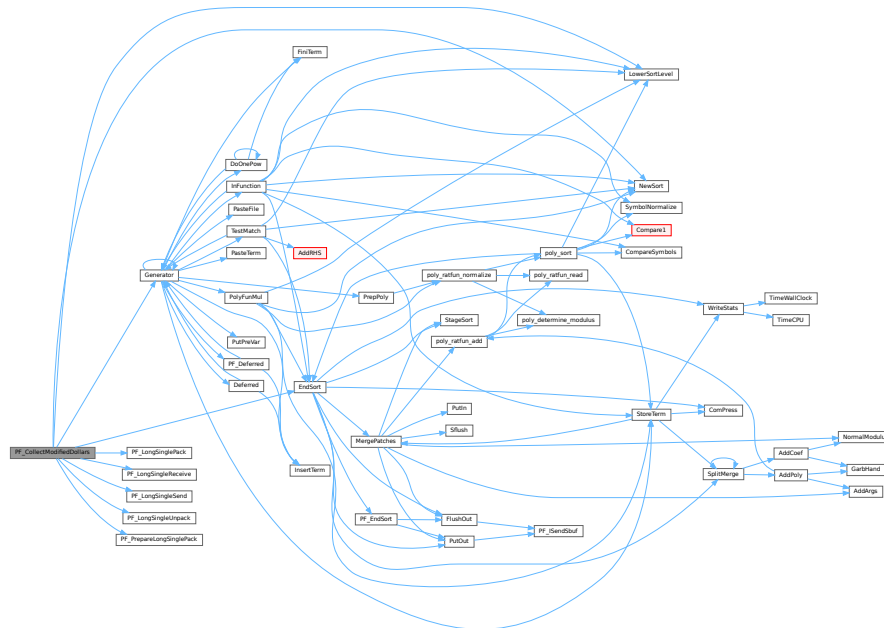

4.97.4.22 PF_BroadcastModifiedDollars()

```
int PF_BroadcastModifiedDollars (
    void )
```

Broadcasts modified dollar variables on the master to the all slaves.

The potentially modified dollar variables are given in PotModdollars, and the number of them is given by NumPotModdollars.

The current module could be executed in parallel only if all potentially modified variables are listed in ModOptdollars, otherwise the module was switched to the sequential mode. In either cases, we need to broadcast them.


Returns

0 if OK, nonzero on error.

Definition at line 2784 of file [parallel.c](#).

References [PF_LongMultiBroadcast\(\)](#), and [PF_PrepareLongMultiPack\(\)](#).

Here is the call graph for this function:

**4.97.4.23 PF_BroadcastRedefinedPreVars()**

```
int PF_BroadcastRedefinedPreVars (
    void )
```

Broadcasts preprocessor variables, which were changed by the Redefine statements in the current module, from the master to the all slaves.

The potentially redefined preprocessor variables are given in `AC.pfirstnum`, and the number of them is given by `AC.numpfirstnum`. For an actually redefined variable, the corresponding value in `AC.inputnumbers` is non-negative.

Returns


0 if OK, nonzero on error.

Definition at line 3001 of file [parallel.c](#).

References [PF_LongMultiBroadcast\(\)](#), [PF_PrepareLongMultiPack\(\)](#), [PutPreVar\(\)](#), [VectorPtr](#), and [VectorReserve](#).

Referenced by [PF_Processor\(\)](#).

Here is the call graph for this function:

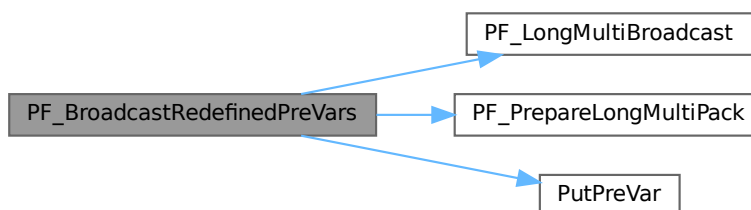

4.97.4.24 PF_StoreInsideInfo()

```
int PF_StoreInsideInfo (
    void )
```

Definition at line 3091 of file [parallel.c](#).

4.97.4.25 PF_RestoreInsideInfo()

```
int PF_RestoreInsideInfo (
    void )
```

Definition at line 3117 of file [parallel.c](#).

4.97.4.26 PF_BroadcastCBuf()

```
int PF_BroadcastCBuf (
    int bufnum )
```

Broadcasts a compiler buffer specified by *bufnum* from the master to the all slaves.

Parameters

<i>bufnum</i>	The index of the compiler buffer to be broadcast.
---------------	---


Returns

0 if OK, nonzero on error.

Definition at line 3143 of file [parallel.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [finishcbuf\(\)](#), [CbUf::lhs](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [PF_LongMultiBroadcast\(\)](#), [PF_PrepereLongMultiPack\(\)](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Here is the call graph for this function:

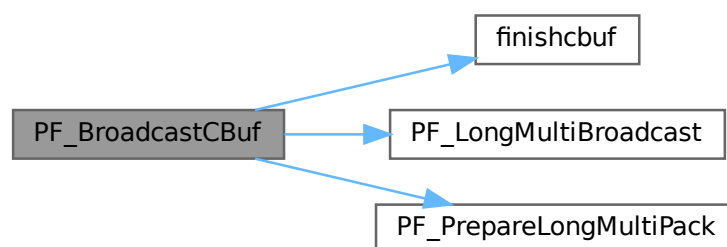

4.97.4.27 PF_BroadcastExpFlags()

```
int PF_BroadcastExpFlags (
    void )
```

Broadcasts AR.expflags and several properties of each expression, e.g., e->vflags, from the master to all slaves.


Returns

0 if OK, nonzero on error.

Definition at line 3254 of file [parallel.c](#).

References [PF_LongMultiBroadcast\(\)](#), and [PF_PrepareLongMultiPack\(\)](#).

Here is the call graph for this function:



4.97.4.28 PF_BroadcastExpr()

```
int PF_BroadcastExpr (
    EXPRESSIONS e,
    FILEHANDLE * file )
```

Broadcasts an expression from the master to the all slaves.

Parameters

<i>e</i>	The expression to be broadcast.
<i>file</i>	The file in which the expression is sitting.

Returns

0 if OK, nonzero on error.

Definition at line 3548 of file [parallel.c](#).

Referenced by [PF_BroadcastRHS\(\)](#).

4.97.4.29 PF_BroadcastRHS()

```
int PF_BroadcastRHS (
    void )
```

Broadcasts expressions appearing in the right-hand side from the master to the all slaves.

Returns

0 if OK, nonzero on error.

Definition at line 3576 of file [parallel.c](#).

References [PF_BroadcastExpr\(\)](#).

Referenced by [Processor\(\)](#).

Here is the call graph for this function:



4.97.4.30 PF_InParallelProcessor()

```
int PF_InParallelProcessor (
    void )
```

Processes expressions in the InParallel mode, i.e., dividing expressions marked by `partodo` over the slaves.

Returns

0 if OK, nonzero on error.

Definition at line 3623 of file [parallel.c](#).

Referenced by [Processor\(\)](#).

4.97.4.31 PF_SendFile()

```
int PF_SendFile (
    int to,
    FILE * fd )
```

Sends a file to the process specified by `to`.

Parameters

<i>to</i>	the destination process number.
<i>fd</i>	the file to be sent.

Returns

the size of sent data in bytes, or -1 on error.

Definition at line 4220 of file [parallel.c](#).

References [PF_RawSend\(\)](#).

Referenced by [DoCheckpoint\(\)](#).

Here is the call graph for this function:

**4.97.4.32 PF_RecvFile()**

```
int PF_RecvFile (
    int from,
    FILE * fd )
```

Receives a file from the process specified by *from*.

Parameters

<i>from</i>	the source process number.
<i>fd</i>	the file to save the received data.

Returns

the size of received data in bytes, or -1 on error.

Definition at line 4258 of file [parallel.c](#).

References [PF_RawRecv\(\)](#).

Referenced by [DoCheckpoint\(\)](#).

Here is the call graph for this function:



4.97.4.33 PF_MLock()

```
void PF_MLock (
    void )
```

A function called by MLOCK(ErrorMessageLock) for slaves.

Definition at line 4339 of file [parallel.c](#).

References [VectorClear](#).

4.97.4.34 PF_MUnlock()

```
void PF_MUnlock (
    void )
```

A function called by MUNLOCK(ErrorMessageLock) for slaves.

Definition at line 4355 of file [parallel.c](#).

References [PF_RawSend\(\)](#), [VectorEmpty](#), [VectorPtr](#), and [VectorSize](#).

Here is the call graph for this function:



4.97.4.35 PF_WriteFileToFile()

```
LONG PF_WriteFileToFile (
    int handle,
    UBYTE * buffer,
    LONG size )
```

Replaces WriteFileToFile() on the master and slaves.

It copies the given buffer into internal buffers if called between MLOCK(ErrorMessageLock) and MUNLOCK(ErrorMessageLock) for slaves and handle is StdOut or LogHandle, otherwise calls WriteFileToFile().

Parameters

<i>handle</i>	a file handle that specifies the output.
<i>buffer</i>	a pointer to the source buffer containing the data to be written.
<i>size</i>	the size of data to be written in bytes.

Returns

the actual size of data written to the output in bytes.

Definition at line 4384 of file [parallel.c](#).

References [VectorClear](#), [VectorPtr](#), [VectorPushBacks](#), and [VectorSize](#).

4.97.4.36 PF_FlushStdOutBuffer()

```
void PF_FlushStdOutBuffer (
    void )
```

Explicitly Flushes the buffer for the standard output on the master, which is used if PF_ENABLE_STDOUT_↵
BUFFERING is defined.

Definition at line 4478 of file [parallel.c](#).

References [VectorClear](#), [VectorPtr](#), and [VectorSize](#).

4.97.4.37 PF_FreeErrorMessageBuffers()

```
void PF_FreeErrorMessageBuffers (
    void )
```

Frees the buffers allocated for the synchronized output.

Currently, not used anywhere, but could be used in [PF_Terminate\(\)](#).

Definition at line 4614 of file [parallel.c](#).

References [VectorFree](#).

4.97.5 Variable Documentation**4.97.5.1 PF**

[PARALLELVARS](#) PF

Definition at line 90 of file [parallel.c](#).

4.98 parallel.c

[Go to the documentation of this file.](#)

```

00001
00011 /* #[ License : */
00012 /*
00013 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00014 *   When using this file you are requested to refer to the publication
00015 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00016 *   This is considered a matter of courtesy as the development was paid
00017 *   for by FOM the Dutch physics granting agency and we would like to
00018 *   be able to track its scientific use to convince FOM of its value
00019 *   for the community.
00020 *
00021 *   This file is part of FORM.
00022 *
00023 *   FORM is free software: you can redistribute it and/or modify it under the
00024 *   terms of the GNU General Public License as published by the Free Software
00025 *   Foundation, either version 3 of the License, or (at your option) any later
00026 *   version.
00027 *
00028 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00029 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00030 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00031 *   details.
00032 *
00033 *   You should have received a copy of the GNU General Public License along
00034 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00035 */
00036 /* #[ License : */
00037 /*
00038 *   #[ includes :
00039 */
00040 #include "form3.h"
00041 #include "vector.h"
00042
00043 /*
00044 #define PF_DEBUG_BCAST_LONG
00045 #define PF_DEBUG_BCAST_BUF
00046 #define PF_DEBUG_BCAST_PREDOLLAR
00047 #define PF_DEBUG_BCAST_RHSEXP
00048 #define PF_DEBUG_BCAST_DOLLAR
00049 #define PF_DEBUG_BCAST_PREVAR
00050 #define PF_DEBUG_BCAST_CBUF
00051 #define PF_DEBUG_BCAST_EXPRFLAGS
00052 #define PF_DEBUG_REDUCE_DOLLAR
00053 */
00054
00055 /* mpi.c */
00056 LONG PF_RealTime(int);
00057 int PF_LibInit(int*, char**);
00058 int PF_LibTerminate(int);
00059 int PF_Probe(int*);
00060 int PF_RecvWbuf(WORD*, LONG*, int*);
00061 int PF_IRecvRbuf(PF_BUFFER*, int, int);
00062 int PF_WaitRbuf(PF_BUFFER *, int, LONG *);
00063 int PF_RawSend(int dest, void *buf, LONG l, int tag);
00064 LONG PF_RawRecv(int *src, void *buf, LONG thesize, int *tag);
00065 int PF_RawProbe(int *src, int *tag, int *bytesize);
00066
00067 /* Private functions */
00068
00069 static int PF_WaitAllSlaves(void);
00070
00071 static void PF_PackRedefinedPreVars(void);
00072 static void PF_UnpackRedefinedPreVars(void);
00073
00074 static int PF_Wait4MasterIP(int tag);
00075 static int PF_DoOneExpr(void);
00076 static int PF_ReadMaster(void); /* reads directly to its scratch! */
00077 static int PF_Slave2MasterIP(int src); /* both master and slave */
00078 static int PF_Master2SlaveIP(int dest, EXPRESSIONS e);
00079 static int PF_WalkThrough(WORD *t, LONG l, LONG chunk, LONG *count);
00080 static int PF_SendChunkIP(FILEHANDLE *curfile, POSITION *position, int to, LONG thesize);
00081 static int PF_RecvChunkIP(FILEHANDLE *curfile, int from, LONG thesize);
00082
00083 static void PF_ReceiveErrorMessage(int src, int tag);
00084 static void PF_CatchErrorMessages(int *src, int *tag);
00085 static void PF_CatchErrorMessagesForAll(void);
00086 static int PF_ProbeWithCatchingErrorMessages(int *src);
00087
00088 /* Variables */
00089
00090 PARALLELVARS PF;
00091 #ifndef MPI2

```

```

00092 WORD *PF_shared_buff;
00093 #endif
00094
00095 static LONG PF_goutterms; /* (master) Total out terms at PF_EndSort(), used in PF_Statistics().
    */
00096 static POSITION PF_exprsize; /* (master) The size of the expression at PF_EndSort(), used in
    PF_Processor(). */
00097
00098 /*
00099 This will work well only under Linux, see
00100 #ifdef PF_WITH_SCHED_YIELD
00101 below in PF_WaitAllSlaves().
00102 */
00103 #ifdef PF_WITH_SCHED_YIELD
00104 #include <sched.h>
00105 #endif
00106
00107 #ifdef PF_WITHLOG
00108 #define PRINTFBUF(TEXT,TERM,SIZE) { UBYTE lbuf[24]; if(PF.log){ WORD iii;\
00109 NumToStr(lbuf,AC.CModule); \
00110 fprintf(stderr,"%d|s] %s : ",PF.me,lbuf,(char*)TEXT);\
00111 if(TERM){ fprintf(stderr,"%d] ",(int)(*TERM));\
00112 if((SIZE)<500 && (SIZE)>0) for(iii=1;iii<(SIZE);iii++)\
00113 fprintf(stderr,"%d ",TERM[iii]); }\
00114 fprintf(stderr,"\n");\
00115 fflush(stderr); } }
00116 #else
00117 #define PRINTFBUF(TEXT,TERM,SIZE) {}
00118 #endif
00119
00124 #define SWAP(x, y) \
00125 do { \
00126 char swap_tmp__[sizeof(x) == sizeof(y) ? (int)sizeof(x) : -1]; \
00127 memcpy(swap_tmp__, &y, sizeof(x)); \
00128 memcpy(&y, &x, sizeof(x)); \
00129 memcpy(&x, swap_tmp__, sizeof(x)); \
00130 } while (0)
00131
00135 #define PACK_LONG(p, n) \
00136 do { \
00137 *p)++ = (UWORD)((ULONG)(n) & (ULONG)WORDMASK); \
00138 *p)++ = (UWORD)((ULONG)(n) >> BITSINWORD) & (ULONG)WORDMASK); \
00139 } while (0)
00140
00144 #define UNPACK_LONG(p, n) \
00145 do { \
00146 (n) = (LONG)((((ULONG)(p)[1] & (ULONG)WORDMASK) << BITSINWORD) | ((ULONG)(p)[0] &
(ULONG)WORDMASK)); \
00147 (p) += 2; \
00148 } while (0)
00149
00153 #define CHECK(condition) _CHECK(condition, __FILE__, __LINE__)
00154 #define _CHECK(condition, file, line) __CHECK(condition, file, line)
00155 #define __CHECK(condition, file, line) \
00156 do { \
00157 if ( !(condition) ) { \
00158 Error0("Fatal error at " file ":" #line); \
00159 Terminate(-1); \
00160 } \
00161 } while (0)
00162
00163 /*
00164 * For debugging.
00165 */
00166 #define DBGOUT(lv1, lv2, a) do { if ( lv1 >= lv2 ) { printf a; fflush(stdout); } } while (0)
00167
00168 /* (AN.ninterms of master) == max(AN.ninterms of slaves) == sum(PF_linterms of slaves) at EndSort().
    */
00169 #define DBGOUT_NINTERMS(lv, a)
00170 /* #define DBGOUT_NINTERMS(lv, a) DBGOUT(1, lv, a) */
00171
00172 /*
00173 #] includes :
00174 #[ statistics :
00175 #] variables : (should be part of a struct?)
00176 */
00177 static LONG PF_linterms; /* local interms on this proces: PF_Proces */
00178 #define PF_STATS_SIZE 5
00179 static LONG **PF_stats = NULL; /* space for collecting statistics of all procs */
00180 static LONG PF_laststat; /* last realtime when statistics were printed */
00181 static LONG PF_statsinterval; /* timeinterval for printing statistics */
00182 /*
00183 #] variables :
00184 #[ PF_Statistics :
00185 */
00186
00195 static int PF_Statistics(LONG **stats, int proc)

```

```

00196 {
00197     GETIDENTITY
00198     LONG real, cpu;
00199     WORD rpart, cpart;
00200     int i, j;
00201
00202     if ( AT.SS == AM.S0 && PF.me == MASTER ) {
00203         real = PF_RealTime(PF_TIME); rpart = (WORD)(real%100); real /= 100;
00204
00205         if ( PF_stats == NULL ) {
00206             PF_stats = (LONG**)Malloc1(PF.numtasks*sizeof(LONG*), "PF_stats 1");
00207             for ( i = 0; i < PF.numtasks; i++ ) {
00208                 PF_stats[i] = (LONG*)Malloc1(PF_STATS_SIZE*sizeof(LONG), "PF_stats 2");
00209                 for ( j = 0; j < PF_STATS_SIZE; j++ ) PF_stats[i][j] = 0;
00210             }
00211         }
00212         if ( proc > 0 ) for ( i = 0; i < PF_STATS_SIZE; i++ ) PF_stats[proc][i] = stats[0][i];
00213
00214         if ( real >= PF_laststat + PF_statsinterval || proc == 0 ) {
00215             LONG sum[PF_STATS_SIZE];
00216
00217             for ( i = 0; i < PF_STATS_SIZE; i++ ) sum[i] = 0;
00218             sum[0] = cpu = TimeCPU(1);
00219             cpart = (WORD)(cpu%1000);
00220             cpu /= 1000;
00221             cpart /= 10;
00222             if ( AC.OldParallelStats ) MesPrint("");
00223             if ( proc > 0 && AC.StatsFlag && AC.OldParallelStats ) {
00224                 MesPrint("proc      CPU      in      gen      left      byte");
00225                 MesPrint("%3d : %7l.%2i %10l", 0, cpu, cpart, AN.ninterms);
00226             }
00227             else if ( AC.StatsFlag && AC.OldParallelStats ) {
00228                 MesPrint("proc      CPU      in      gen      out      byte");
00229                 MesPrint("%3d : %7l.%2i %10l %10l %10l", 0, cpu, cpart, AN.ninterms, 0, PF_goutterms);
00230             }
00231
00232             for ( i = 1; i < PF.numtasks; i++ ) {
00233                 cpart = (WORD)(PF_stats[i][0]%1000);
00234                 cpu = PF_stats[i][0] / 1000;
00235                 cpart /= 10;
00236                 if ( AC.StatsFlag && AC.OldParallelStats )
00237                     MesPrint("%3d : %7l.%2i %10l %10l %10l", i, cpu, cpart,
00238                             PF_stats[i][2], PF_stats[i][3], PF_stats[i][4]);
00239                 for ( j = 0; j < PF_STATS_SIZE; j++ ) sum[j] += PF_stats[i][j];
00240             }
00241             cpart = (WORD)(sum[0]%1000);
00242             cpu = sum[0] / 1000;
00243             cpart /= 10;
00244             if ( AC.StatsFlag && AC.OldParallelStats ) {
00245                 MesPrint("Sum = %7l.%2i %10l %10l %10l", cpu, cpart, sum[2], sum[3], sum[4]);
00246                 MesPrint("Real = %7l.%2i %20s (%1) %16s",
00247                         real, rpart, AC.Commercial, AC.CModule, EXPRNAME(AR.CurExpr));
00248                 MesPrint("");
00249             }
00250             PF_laststat = real;
00251         }
00252     }
00253     return(0);
00254 }
00255 /*
00256     #] PF_Statistics :
00257     #] statistics :
00258     #[ sort.c :
00259     #[ sort variables :
00260 */
00261
00262 typedef struct NoDe {
00263     struct NoDe *left;
00264     struct NoDe *rgh;
00265     int lloser;
00266     int rloser;
00267     int lsrc;
00268     int rsrc;
00269 } NODE;
00270
00271 /*
00272     should/could be put in one struct
00273 */
00274 static NODE *PF_root; /* root of tree of losers */
00275 static WORD PF_loser; /* this is the last loser */
00276 static WORD **PF_term; /* these point to the active terms */
00277 static WORD **PF_newcpo; /* new coeffs of merged terms */
00278 static WORD *PF_newclen; /* length of new coefficients */
00279
00280 /*
00281     preliminary: could also write somewhere else?
00282 */

```

```

00286
00287 static WORD *PF_WorkSpace; /* used in PF_EndSort() */
00288 static UWORD *PF_ScratchSpace; /* used in PF_GetLoser() */
00289
00290 /*
00291     #] sort variables :
00292     #[ PF_AllocBuf :
00293 */
00294
00311 static PF_BUFFER *PF_AllocBuf(int nbufs, LONG bsize, WORD free)
00312 {
00313     PF_BUFFER *buf;
00314     UBYTE *p, *stop;
00315     LONG allocsize;
00316     int i;
00317
00318     allocsize =
00319         (LONG)(sizeof(PF_BUFFER) + 4*nbufs*sizeof(WORD*) + (nbufs-free)*bsize);
00320
00321     allocsize +=
00322         (LONG)( nbufs * ( 2 * sizeof(MPI_Status)
00323                         + sizeof(MPI_Request)
00324                         + sizeof(MPI_Datatype)
00325                     ) );
00326     allocsize += (LONG)( nbufs * 3 * sizeof(int) );
00327
00328     if ( ( buf = (PF_BUFFER*)Malloc1(allocsize,"PF_AllocBuf") ) == NULL ) return(NULL);
00329
00330     p = ((UBYTE *)buf) + sizeof(PF_BUFFER);
00331     stop = ((UBYTE *)buf) + allocsize;
00332
00333     buf->nbufs = nbufs;
00334     buf->active = 0;
00335
00336     buf->buff = (WORD**)p; p += buf->nbufs*sizeof(WORD*);
00337     buf->fill = (WORD**)p; p += buf->nbufs*sizeof(WORD*);
00338     buf->full = (WORD**)p; p += buf->nbufs*sizeof(WORD*);
00339     buf->stop = (WORD**)p; p += buf->nbufs*sizeof(WORD*);
00340     buf->status = (MPI_Status *)p; p += buf->nbufs*sizeof(MPI_Status);
00341     buf->retstat = (MPI_Status *)p; p += buf->nbufs*sizeof(MPI_Status);
00342     buf->request = (MPI_Request *)p; p += buf->nbufs*sizeof(MPI_Request);
00343     buf->type = (MPI_Datatype *)p; p += buf->nbufs*sizeof(MPI_Datatype);
00344     buf->index = (int *)p; p += buf->nbufs*sizeof(int);
00345
00346     for ( i = 0; i < buf->nbufs; i++ ) buf->request[i] = MPI_REQUEST_NULL;
00347     buf->tag = (int *)p; p += buf->nbufs*sizeof(int);
00348     buf->from = (int *)p; p += buf->nbufs*sizeof(int);
00349 /*
00350     and finally the real bufferspace
00351 */
00352     for ( i = free; i < buf->nbufs; i++ ) {
00353         buf->buff[i] = (WORD*)p; p += bsize;
00354         buf->stop[i] = (WORD*)p;
00355         buf->fill[i] = buf->full[i] = buf->buff[i];
00356     }
00357     if ( p != stop ) {
00358         MesPrint("Error in PF_AllocBuf p = %x stop = %x\n",p,stop);
00359         return(NULL);
00360     }
00361     return(buf);
00362 }
00363
00364 /*
00365     #] PF_AllocBuf :
00366     #[ PF_InitTree :
00367 */
00368
00380 static int PF_InitTree(void)
00381 {
00382     GETIDENTITY
00383     PF_BUFFER **rbuf = PF.rbufs;
00384     UBYTE *p, *stop;
00385     int numrbufs,numtasks = PF.numtasks;
00386     int i, j, src, numnodes;
00387     int numslaves = numtasks - 1;
00388     LONG size;
00389 /*
00390     #] the buffers : for the new coefficients and the terms
00391     we need one for each slave
00392 */
00393     if ( PF_term == NULL ) {
00394         size = 2*numtasks*sizeof(WORD*) + sizeof(WORD)*
00395             ( numtasks*(1 + AM.MaxTal) + (AM.MaxTer/sizeof(WORD)+1) + 2*(AM.MaxTal+2) );
00396
00397         PF_term = (WORD **)Malloc1(size,"PF_term");
00398         stop = ((UBYTE*)PF_term) + size;
00399         p = ((UBYTE*)PF_term) + numtasks*sizeof(WORD*);

```

```

00400
00401     PF_newcpos = (WORD **)p; p += sizeof(WORD*) * numtasks;
00402     PF_newclen = (WORD *)p; p += sizeof(WORD) * numtasks;
00403     for ( i = 0; i < numtasks; i++ ) {
00404         PF_newcpos[i] = (WORD *)p; p += sizeof(WORD)*AM.MaxTal;
00405         PF_newclen[i] = 0;
00406     }
00407     PF_WorkSpace = (WORD *)p; p += AM.MaxTer+sizeof(WORD);
00408     PF_ScratchSpace = (UWORD*)p; p += 2*(AM.MaxTal+2)*sizeof(UWORD);
00409
00410     if ( p != stop ) { MesPrint("error in PF_InitTree"); return(-1); }
00411 }
00412 /*
00413     #] the buffers :
00414     #[ the receive buffers :
00415 */
00416     numrbufs = PF.numrbufs;
00417 /*
00418     this is the size we have in the combined sortbufs for one slave
00419 */
00420     size = (AT.SS->sTop2 - AT.SS->lBuffer - 1)/(PF.numtasks - 1);
00421
00422     if ( rbuf == NULL ) {
00423         if ( ( rbuf = (PF_BUFFER**)Malloc1(numtasks*sizeof(PF_BUFFER*), "Master: rbufs") ) == NULL )
00424             return(-1);
00425         if ( ( rbuf[0] = PF_AllocBuf(1,0,1) ) == NULL ) return(-1);
00426         for ( i = 1; i < numtasks; i++ ) {
00427             if (!( rbuf[i] = PF_AllocBuf(numrbufs,sizeof(WORD)*size,1)) ) return(-1);
00428         }
00429         rbuf[0]->buff[0] = AT.SS->lBuffer;
00430         rbuf[0]->full[0] = rbuf[0]->fill[0] = rbuf[0]->buff[0];
00431         rbuf[0]->stop[0] = rbuf[1]->buff[0] = rbuf[0]->buff[0] + 1;
00432         rbuf[1]->full[0] = rbuf[1]->fill[0] = rbuf[1]->buff[0];
00433         for ( i = 2; i < numtasks; i++ ) {
00434             rbuf[i-1]->stop[0] = rbuf[i]->buff[0] = rbuf[i-1]->buff[0] + size;
00435             rbuf[i]->full[0] = rbuf[i]->fill[0] = rbuf[i]->buff[0];
00436         }
00437         rbuf[numtasks-1]->stop[0] = rbuf[numtasks-1]->buff[0] + size;
00438
00439         for ( i = 1; i < numtasks; i++ ) {
00440             for ( j = 0; j < rbuf[i]->numbufs; j++ ) {
00441                 rbuf[i]->full[j] = rbuf[i]->fill[j] = rbuf[i]->buff[j] + AM.MaxTer/sizeof(WORD) + 2;
00442             }
00443             PF_term[i] = rbuf[i]->fill[rbuf[i]->active];
00444             *PF_term[i] = 0;
00445             PF_IRecvRbuf(rbuf[i],rbuf[i]->active,i);
00446         }
00447         rbuf[0]->active = 0;
00448         PF_term[0] = rbuf[0]->buff[0];
00449         PF_term[0][0] = 0; /* PF_term[0] is used for a zero term. */
00450         PF.rbufs = rbuf;
00451 /*
00452         #] the receive buffers :
00453         #[ the actual tree :
00454
00455         calculate number of nodes in mergetree and allocate space for them
00456 */
00457         if ( numslaves < 3 ) numnodes = 1;
00458         else {
00459             numnodes = 2;
00460             while ( numnodes < numslaves ) numnodes *= 2;
00461             numnodes -= 1;
00462         }
00463
00464         if ( PF_root == NULL )
00465             if ( ( PF_root = (NODE*)Malloc1(sizeof(NODE)*numnodes,"nodes in mergetree") ) == NULL )
00466                 return(-1);
00467 /*
00468         then initialize all the nodes
00469 */
00470         src = 1;
00471         for ( i = 0; i < numnodes; i++ ) {
00472             if ( 2*(i+1) <= numnodes ) {
00473                 PF_root[i].left = &(PF_root[2*(i+1)-1]);
00474                 PF_root[i].lsrc = 0;
00475             }
00476             else {
00477                 PF_root[i].left = 0;
00478                 if ( src < numtasks ) PF_root[i].lsrc = src++;
00479                 else PF_root[i].lsrc = 0;
00480             }
00481             PF_root[i].lloser = 0;
00482         }
00483         for ( i = 0; i < numnodes; i++ ) {
00484             if ( 2*(i+1)+1 <= numnodes ) {
00485                 PF_root[i].rght = &(PF_root[2*(i+1)]);

```

```

00486         PF_root[i].rsrc = 0;
00487     }
00488     else {
00489         PF_root[i].rghet = 0;
00490         if (src<numtasks) PF_root[i].rsrc = src++;
00491         else PF_root[i].rsrc = 0;
00492     }
00493     PF_root[i].rloser = 0;
00494 }
00495 /*
00496     #] the actual tree :
00497 */
00498 return(numnodes);
00499 }
00500
00501 /*
00502     #] PF_InitTree :
00503     #[ PF_PutIn :
00504 */
00505
00524 static WORD *PF_PutIn(int src)
00525 {
00526     int tag;
00527     WORD im, r;
00528     WORD *m1, *m2;
00529     LONG size;
00530     PF_BUFFER *rbuf = PF.rbufs[src];
00531     int a = rbuf->active;
00532     int next = a+1 >= rbuf->numbufs ? 0 : a+1 ;
00533     WORD *lastterm = PF_term[src];
00534     WORD *term = rbuf->fill[a];
00535
00536     if ( src <= 0 ) return(PF_term[0]);
00537
00538     if ( rbuf->full[a] == rbuf->buff[a] + AM.MaxTer/sizeof(WORD) + 2 ) {
00539 /*
00540         very first term from this src
00541 */
00542         tag = PF_WaitRbuf(rbuf,a,&size);
00543         rbuf->full[a] += size;
00544         if ( tag == PF_ENDBUFFER_MSGTAG ) *rbuf->full[a]++ = 0;
00545         else if ( rbuf->numbufs > 1 ) {
00546 /*
00547             post a nonblock. recv. for the next buffer
00548 */
00549             rbuf->full[next] = rbuf->buff[next] + AM.MaxTer/sizeof(WORD) + 2;
00550             size = (LONG)(rbuf->stop[next] - rbuf->full[next]);
00551             PF_IRecvRbuf(rbuf,next,src);
00552         }
00553     }
00554     if ( *term == 0 && term != rbuf->full[a] ) return(PF_term[0]);
00555 /*
00556     exception is for rare cases when the terms fitted exactly into buffer
00557 */
00558     if ( term + *term > rbuf->full[a] || term + 1 >= rbuf->full[a] ) {
00559 newterms:
00560         m1 = rbuf->buff[next] + AM.MaxTer/sizeof(WORD) + 1;
00561         if ( *term < 0 || term == rbuf->full[a] ) {
00562 /*
00563             copy term and lastterm to the new buffer, so that they end at m1
00564 */
00565             m2 = rbuf->full[a] - 1;
00566             while ( m2 >= term ) *m1-- = *m2--;
00567             rbuf->fill[next] = term = m1 + 1;
00568             m2 = lastterm + *lastterm - 1;
00569             while ( m2 >= lastterm ) *m1-- = *m2--;
00570             lastterm = m1 + 1;
00571         }
00572         else {
00573 /*
00574             copy beginning of term to the next buffer so that it ends at m1
00575 */
00576             m2 = rbuf->full[a] - 1;
00577             while ( m2 >= term ) *m1-- = *m2--;
00578             rbuf->fill[next] = term = m1 + 1;
00579         }
00580         if ( rbuf->numbufs == 1 ) {
00581             rbuf->full[a] = rbuf->buff[a] + AM.MaxTer/sizeof(WORD) + 2;
00582             size = (LONG)(rbuf->stop[a] - rbuf->full[a]);
00583             PF_IRecvRbuf(rbuf,a,src);
00584         }
00585 /*
00586         wait for new terms in the next buffer
00587 */
00588         rbuf->full[next] = rbuf->buff[next] + AM.MaxTer/sizeof(WORD) + 2;
00589         tag = PF_WaitRbuf(rbuf,next,&size);
00590         rbuf->full[next] += size;

```



```

00591         if ( tag == PF_ENDBUFFER_MSGTAG ) {
00592             *rbuf->full[next]++ = 0;
00593         }
00594         else if ( rbuf->numbufs > 1 ) {
00595             /*
00596                 post a nonblock. recv. for active buffer, it is not needed anymore
00597             */
00598             rbuf->full[a] = rbuf->buff[a] + AM.MaxTer/sizeof(WORD) + 2;
00599             size = (LONG)(rbuf->stop[a] - rbuf->full[a]);
00600             PF_IRecvRbuf(rbuf,a,src);
00601         }
00602         /*
00603             now safely make next buffer active
00604         */
00605         a = rbuf->active = next;
00606     }
00607
00608     if ( *term < 0 ) {
00609         /*
00610             We need to decompress the term
00611         */
00612         im = *term;
00613         r = term[1] - im + 1;
00614         m1 = term + 2;
00615         m2 = lastterm - im + 1;
00616         while ( ++im <= 0 ) *--m1 = *--m2;
00617         *--m1 = r;
00618         rbuf->fill[a] = term = m1;
00619         if ( term + *term > rbuf->full[a] ) goto newterms;
00620     }
00621     rbuf->fill[a] += *term;
00622     return(term);
00623 }
00624
00625 /*
00626     #] PF_PutIn :
00627     #[ PF_GetLoser :
00628 */
00629
00648 static int PF_GetLoser(NODE *n)
00649 {
00650     GETIDENTITY
00651     WORD comp;
00652
00653     if ( PF_loser == 0 ) {
00654         /*
00655             this is for the right initialization of the tree only
00656         */
00657         if ( n->left ) n->lloser = PF_GetLoser(n->left);
00658         else {
00659             n->lloser = n->lsrc;
00660             if ( *(PF_term[n->lsrc] = PF_PutIn(n->lsrc)) == 0 ) n->lloser = 0;
00661         }
00662         PF_loser = 0;
00663         if ( n->right ) n->rloser = PF_GetLoser(n->right);
00664         else {
00665             n->rloser = n->rsrc;
00666             if ( *(PF_term[n->rsrc] = PF_PutIn(n->rsrc)) == 0 ) n->rloser = 0;
00667         }
00668         PF_loser = 0;
00669     }
00670     else if ( PF_loser == n->lloser ) {
00671         if ( n->left ) n->lloser = PF_GetLoser(n->left);
00672         else {
00673             n->lloser = n->lsrc;
00674             if ( *(PF_term[n->lsrc] = PF_PutIn(n->lsrc)) == 0 ) n->lloser = 0;
00675         }
00676     }
00677     else if ( PF_loser == n->rloser ) {
00678 newright:
00679         if ( n->right ) n->rloser = PF_GetLoser(n->right);
00680         else {
00681             n->rloser = n->rsrc;
00682             if ( *(PF_term[n->rsrc] = PF_PutIn(n->rsrc)) == 0 ) n->rloser = 0;
00683         }
00684     }
00685     if ( n->lloser > 0 && n->rloser > 0 ) {
00686         comp = CompareTerms(BHEAD PF_term[n->lloser],PF_term[n->rloser],(WORD)0);
00687         if ( comp > 0 ) return(n->lloser);
00688         else if (comp < 0 ) return(n->rloser);
00689         else {
00690             /*
00691                 #[ terms are equal :
00692             */
00693             WORD *lcpos, *rcpos;
00694             UWORD *newcpos;
00695             WORD lclen, rclen, newclen, newnlen;

```

```

00696         SORTING *S = AT.SS;
00697
00698         if ( S->PolyWise ) {
00699             /*
00700             #[ Here we work with PolyFun :
00701             */
00702                 WORD *ttl, *w;
00703                 WORD r1,r2;
00704                 WORD *ml = PF_term[n->lloser];
00705                 WORD *mr = PF_term[n->rloser];
00706
00707                 if ( ( r1 = (int)*PF_term[n->lloser] ) <= 0 ) r1 = 20;
00708                 if ( ( r2 = (int)*PF_term[n->rloser] ) <= 0 ) r2 = 20;
00709                 ttl = ml;
00710                 ml += S->PolyWise;
00711                 mr += S->PolyWise;
00712                 if ( S->PolyFlag == 2 ) {
00713                     w = poly_ratfun_add(BHEAD ml,mr);
00714                     if ( *ttl + w[1] - ml[1] > AM.MaxTer/((LONG)sizeof(WORD)) ) {
00715                         MesPrint("Term too complex in PolyRatFun addition. MaxTermSize of %10l is too
small",AM.MaxTer);
00716                         Terminate(-1);
00717                     }
00718                     AT.WorkPointer = w;
00719                 }
00720                 else {
00721                     w = AT.WorkPointer;
00722                     if ( w + ml[1] + mr[1] > AT.WorkTop ) {
00723                         MesPrint("A WorkSpace of %10l is too small",AM.WorkSize);
00724                         Terminate(-1);
00725                     }
00726                     AddArgs(BHEAD ml,mr,w);
00727                 }
00728                 r1 = w[1];
00729                 if ( r1 <= FUNHEAD || ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 ) ) {
00730                     goto cancelled;
00731                 }
00732                 if ( r1 == ml[1] ) {
00733                     NCOPY(ml,w,r1);
00734                 }
00735                 else if ( r1 < ml[1] ) {
00736                     r2 = ml[1] - r1;
00737                     mr = w + r1;
00738                     ml += ml[1];
00739                     while ( --r1 >= 0 ) *--ml = *--mr;
00740                     mr = ml - r2;
00741                     r1 = S->PolyWise;
00742                     while ( --r1 >= 0 ) *--ml = *--mr;
00743                     *ml -= r2;
00744                     PF_term[n->lloser] = ml;
00745                 }
00746                 else {
00747                     r2 = r1 - ml[1];
00748                     if ( r2 > 2*AM.MaxTal )
00749                         MesPrint("warning: new term in polyfun is large");
00750                     mr = ttl - r2;
00751                     r1 = S->PolyWise;
00752                     ml = ttl;
00753                     *ml += r2;
00754                     PF_term[n->lloser] = mr;
00755                     NCOPY(mr,ml,r1);
00756                     r1 = w[1];
00757                     NCOPY(mr,w,r1);
00758                 }
00759                 PF_newclen[n->rloser] = 0;
00760                 PF_loser = n->rloser;
00761                 goto newright;
00762             /*
00763             #[ Here we work with PolyFun :
00764             */
00765                 }
00766                 if ( ( lclen = PF_newclen[n->lloser] ) != 0 ) lcpos = PF_newcpos[n->lloser];
00767                 else {
00768                     lcpos = PF_term[n->lloser];
00769                     lclen = *(lcpos += *lcpos - 1);
00770                     lcpos -= ABS(lclen) - 1;
00771                 }
00772                 if ( ( rclen = PF_newclen[n->rloser] ) != 0 ) rcpos = PF_newcpos[n->rloser];
00773                 else {
00774                     rcpos = PF_term[n->rloser];
00775                     rclen = *(rcpos += *rcpos - 1);
00776                     rcpos -= ABS(rclen) - 1;
00777                 }
00778                 lclen = ( (lclen > 0) ? (lclen-1) : (lclen+1) ) >> 1;
00779                 rclen = ( (rclen > 0) ? (rclen-1) : (rclen+1) ) >> 1;
00780                 newcpos = PF_ScratchSpace;
00781                 if ( AddRat(BHEAD (UWORD *)lcpos,lclen,(UWORD *)rcpos,rclen,newcpos,&newnlen) )

```

```

return(-1);
00782     if ( AN.ncmod != 0 ) {
00783         if ( ( AC.modmode & POSNEG ) != 0 ) {
00784             NormalModulus(newcpos,&newnlen);
00785         }
00786         if ( BigLong(newcpos,newnlen,(UWORD *)AC.cmod,ABS(AN.ncmod)) >=0 ) {
00787             WORD ii;
00788             SubPLon(newcpos,newnlen,(UWORD *)AC.cmod,ABS(AN.ncmod),newcpos,&newnlen);
00789             newcpos[newnlen] = 1;
00790             for ( ii = 1; ii < newnlen; ii++ ) newcpos[newnlen+ii] = 0;
00791         }
00792     }
00793     if ( newnlen == 0 ) {
00794         /*
00795             terms cancel, get loser of left subtree and then of right subtree
00796         */
00797         cancelled:
00798             PF_loser = n->lloser;
00799             PF_newcplen[n->lloser] = 0;
00800             if ( n->left ) n->lloser = PF_GetLoser(n->left);
00801             else {
00802                 n->lloser = n->lsrc;
00803                 if ( *(PF_term[n->lsrc] = PF_PutIn(n->lsrc)) == 0 ) n->lloser = 0;
00804             }
00805             PF_loser = n->rloser;
00806             PF_newcplen[n->rloser] = 0;
00807             goto newright;
00808         }
00809         else {
00810             /*
00811                 keep the left term and get the loser of right subtree
00812             */
00813             newnlen *= 2;
00814             newcplen = ( newnlen > 0 ) ? ( newnlen + 1 ) : ( newnlen - 1 );
00815             if ( newnlen < 0 ) newnlen = -newnlen;
00816             PF_newcplen[n->lloser] = newcplen;
00817             lcpos = PF_newcpos[n->lloser];
00818             if ( newcplen < 0 ) newcplen = -newcplen;
00819             while ( newcplen-- ) *lcpos++ = *newcpos++;
00820             PF_loser = n->rloser;
00821             PF_newcplen[n->rloser] = 0;
00822             goto newright;
00823         }
00824         /*
00825             #] terms are equal :
00826         */
00827     }
00828 }
00829 if (n->lloser > 0) return(n->lloser);
00830 if (n->rloser > 0) return(n->rloser);
00831 return(0);
00832 }
00833 /*
00834     #] PF_GetLoser :
00835     #[ PF_EndSort :
00836 */
00837
00864 int PF_EndSort(void)
00865 {
00866     GETIDENTITY
00867     FILEHANDLE *fout = AR.outfile;
00868     PF_BUFFER *sbuf=PF.sbuf;
00869     SORTING *S = AT.SS;
00870     WORD *outterm,*pp;
00871     LONG size, noutterms;
00872     POSITION position, oldposition;
00873     WORD i,cc;
00874     int oldgzipCompress;
00875
00876     if ( AT.SS != AT.S0 || !PF.parallel ) return 0;
00877
00878     if ( PF.me != MASTER ) {
00879         /*
00880             #[ the slaves have to initialize their sendbuffer :
00881
00882             this is a slave and it's PObuffer should be the minimum of the
00883             sortiosize on the master and the PObuffer of our file.
00884             First save the original PObuffer and PObuffer of the outfile
00885         */
00886         size = (S->sTop2 - S->lBuffer - 1)/(PF.numtasks - 1);
00887         size -= (AM.MaxTer/sizeof(WORD) + 2);
00888         if ( fout->POsize < (LONG)(size*sizeof(WORD)) ) size = fout->POsize/sizeof(WORD);
00889         if ( sbuf == NULL ) {
00890             if ( (sbuf = PF_AllocBuf(PF.numsbuffers, size*sizeof(WORD), 1)) == NULL ) return -1;
00891             sbuf->active = 0;
00892             PF.sbuf = sbuf;
00893         }
00894     }

```

```

00894     sbuf->buff[0] = fout->PObuffer;
00895     sbuf->stop[0] = fout->PObuffer+size;
00896     if ( sbuf->stop[0] > fout->POstop ) return -1;
00897     for ( i = 0; i < PF.numsbuffers; i++ )
00898         sbuf->fill[i] = sbuf->full[i] = sbuf->buff[i];
00899
00900     fout->PObuffer = sbuf->buff[sbuf->active];
00901     fout->POstop = sbuf->stop[sbuf->active];
00902     fout->POsize = size*sizeof(WORD);
00903     fout->POfill = fout->POfull = fout->PObuffer;
00904 /*
00905     #] the slaves have to initialize their sendbuffer :
00906 */
00907     return(0);
00908 }
00909 /*
00910     this waits for all slaves to be ready to send terms back
00911 */
00912 PF_WaitAllSlaves(); /* Note, the returned value should be 0 on success. */
00913 /*
00914     Now collect the terms of all slaves and merge them.
00915     PF_GetLoser gives the position of the smallest term, which is the real
00916     work. The smallest term needs to be copied to the outbuf: use PutOut.
00917 */
00918 PF_InitTree();
00919 if ( AR.PolyFun == 0 ) { S->PolyFlag = 0; }
00920 else if ( AR.PolyFunType == 1 ) { S->PolyFlag = 1; }
00921 else if ( AR.PolyFunType == 2 ) {
00922     if ( AR.PolyFunExp == 2
00923         || AR.PolyFunExp == 3 ) S->PolyFlag = 1;
00924     else
00925         S->PolyFlag = 2;
00926 }
00927 *AR.CompressPointer = 0;
00928 SeekScratch(fout, &position);
00929 oldposition = position;
00929 oldgzipCompress = AR.gzipCompress;
00930 AR.gzipCompress = 0;
00931
00932 noutterms = 0;
00933
00934 while ( PF_loser >= 0 ) {
00935     if ( (PF_loser = PF_GetLoser(PF_root)) == 0 ) break;
00936     outterm = PF_term[PF_loser];
00937     noutterms++;
00938
00939     if ( PF_newclen[PF_loser] != 0 ) {
00940 /*
00941         #[ this is only when new coeff was too long :
00942 */
00943         outterm = PF_WorkSpace;
00944         pp = PF_term[PF_loser];
00945         cc = *pp;
00946         while ( cc-- ) *outterm++ = *pp++;
00947         outterm = (outterm[-1] > 0) ? outterm-outterm[-1] : outterm+outterm[-1];
00948         if ( PF_newclen[PF_loser] > 0 ) cc = (WORD)PF_newclen[PF_loser] - 1;
00949         else
00950             cc = -(WORD)PF_newclen[PF_loser] - 1;
00951         pp = PF_newcpos[PF_loser];
00952         while ( cc-- ) *outterm++ = *pp++;
00953         *outterm++ = PF_newclen[PF_loser];
00954         *PF_WorkSpace = outterm - PF_WorkSpace;
00955         outterm = PF_WorkSpace;
00956         *PF_newcpos[PF_loser] = 0;
00957         PF_newclen[PF_loser] = 0;
00958 /*
00959         #] this is only when new coeff was too long :
00960 */
00961     }
00962     PRINTFBUF("PF_EndSort to PutOut: ",outterm,*outterm);
00963     PutOut(BHEAD outterm,&position,fout,1);
00964 }
00965 if ( FlushOut(&position,fout,0) ) {
00966     AR.gzipCompress = oldgzipCompress;
00967     return(-1);
00968 }
00969 S->TermsLeft = PF_goutterms = noutterms;
00970 DIFPOS(PF_exprsize, position, oldposition);
00971 AR.gzipCompress = oldgzipCompress;
00972 return(1);
00973 }
00974 /*
00975     #] PF_EndSort :
00976 #] sort.c :
00977 #[ proces.c :
00978     #[ variables :
00979 */
00980

```

```

00981 static WORD *PF_CurrentBracket;
00982
00983 /*
00984     #] variables :
00985     #[ PF_GetTerm :
00986 */
00987
01006 static WORD PF_GetTerm(WORD *term)
01007 {
01008     GETIDENTITY
01009     FILEHANDLE *fi = AC.RhsExprInModuleFlag && PF.rhsInParallel ? &PF.slavebuf : AR.infile;
01010     WORD i;
01011     WORD *next, *np, *last, *lp = 0, *nextstop, *tp=term;
01012
01013     /* Only on the slaves. */
01014
01015     AN.deferskipped = 0;
01016     if ( fi->POfill >= fi->POfull || fi->POfull == fi->PObuffer ) {
01017 ReceiveNew:
01018     {
01019     /*
01020         #[ receive new terms from master :
01021     */
01022         int src = MASTER, tag;
01023         int follow = 0;
01024         LONG size,cpu,space = 0;
01025
01026         if ( PF.log ) {
01027             fprintf(stderr,"%d] Starting to send to Master\n",PF.me);
01028             fflush(stderr);
01029         }
01030
01031         cpu = TimeCPU(1);
01032         PF_PrepPack();
01033         PF_Pack(&cpu, 1,PF_LONG);
01034         PF_Pack(&space, 1,PF_LONG);
01035         PF_Pack(&PF_linterms, 1,PF_LONG);
01036         PF_Pack(&(AM.S0->GenTerms), 1,PF_LONG);
01037         PF_Pack(&(AM.S0->TermsLeft), 1,PF_LONG);
01038         PF_Pack(&follow, 1,PF_INT );
01039
01040         if ( PF.log ) {
01041             fprintf(stderr,"%d] Now sending with tag = %d\n",PF.me,PF_READY_MSGTAG);
01042             fflush(stderr);
01043         }
01044
01045         PF_Send(MASTER, PF_READY_MSGTAG);
01046
01047         if ( PF.log ) {
01048             fprintf(stderr,"%d] returning from send\n",PF.me);
01049             fflush(stderr);
01050         }
01051
01052         size = fi->POstop - fi->PObuffer - 1;
01053 #ifndef AbsolutelyExtra
01054         PF_Receive(MASTER,PF_ANY_MSGTAG,&src,&tag);
01055 #endif MPI2
01056         if ( tag == PF_TERM_MSGTAG ) {
01057             PF_Unpack(&size, 1, PF_LONG);
01058             if ( PF_Put_target(src) == 0 ) {
01059                 printf("PF_Put_target error ...\n");
01060             }
01061         }
01062         else {
01063             PF_RecvWbuf(fi->PObuffer,&size,&src);
01064         }
01065 #else
01066         PF_RecvWbuf(fi->PObuffer,&size,&src);
01067 #endif
01068 #endif
01069         tag=PF_RecvWbuf(fi->PObuffer,&size,&src);
01070
01071         fi->POfill = fi->PObuffer;
01072         /* Get AN.ninterms which sits in the first 2 WORDs. */
01073         {
01074             LONG ninterms;
01075             UNPACK_LONG(fi->POfill, ninterms);
01076             if ( fi->POfill < fi->POfull ) {
01077                 DBGOUT_NINTERMS(2, ("PF.me=%d AN.ninterms=%d PF_linterms=%d ninterms=%d GET\n",
(int)PF.me, (int)AN.ninterms, (int)PF_linterms, (int)ninterms));
01078                 AN.ninterms = ninterms - 1;
01079             } else {
01080                 DBGOUT_NINTERMS(2, ("PF.me=%d AN.ninterms=%d PF_linterms=%d ninterms=%d GETEND\n",
(int)PF.me, (int)AN.ninterms, (int)PF_linterms, (int)ninterms));
01081             }
01082         }
01083         fi->POfull = fi->PObuffer + size;

```

```

01084         if ( tag == PF_ENDSORT_MSGTAG ) *fi->POfull++ = 0;
01085 /*
01086      #] receive new terms from master :
01087 */
01088     }
01089     if ( PF_CurrentBracket ) *PF_CurrentBracket = 0;
01090 }
01091 if ( *fi->POfill == 0 ) {
01092     fi->POfill = fi->POfull = fi->PObuffer;
01093     *term = 0;
01094     goto RegRet;
01095 }
01096 if ( AR.DeferFlag ) {
01097     if ( !PF_CurrentBracket ) {
01098 /*
01099      #[ alloc space :
01100 */
01101         PF_CurrentBracket =
01102             (WORD*)Malloc1(AM.MaxTer,"PF_CurrentBracket");
01103         *PF_CurrentBracket = 0;
01104 /*
01105      #] alloc space :
01106 */
01107     }
01108     while ( *PF_CurrentBracket ) { /* "for each term in the buffer" */
01109 /*
01110      #[ test : bracket & skip if it's equal to the last in PF_CurrentBracket
01111 */
01112         next = fi->POfill;
01113         nextstop = next + *next; nextstop -= ABS(nextstop[-1]);
01114         next++;
01115         last = PF_CurrentBracket+1;
01116         while ( next < nextstop ) {
01117 /*
01118             scan the next term and PF_CurrentBracket
01119 */
01120             if ( *last == HAAKJE && *next == HAAKJE ) {
01121 /*
01122                 the part outside brackets is equal => skip this term
01123 */
01124                 PRINTFBUF("PF_GetTerm skips",fi->POfill,*fi->POfill);
01125                 break;
01126             }
01127 /*
01128             check if the current subterms are equal
01129 */
01130             np = next; next += next[1];
01131             lp = last; last += last[1];
01132             while ( np < next ) if ( *lp++ != *np++ ) goto strip;
01133         }
01134 /*
01135         go on to next term
01136 */
01137         fi->POfill += *fi->POfill;
01138         AN.deferskipped++;
01139 /*
01140         the usual checks
01141 */
01142         if ( fi->POfill >= fi->POfull || fi->POfull == fi->PObuffer )
01143             goto ReceiveNew;
01144         if ( *fi->POfill == 0 ) {
01145             fi->POfill = fi->POfull = fi->PObuffer;
01146             *term = 0;
01147             goto RegRet;
01148         }
01149 /*
01150      #] test :
01151 */
01152     }
01153 /*
01154      #[ copy :
01155 */
01156     this term to CurrentBracket and the part outside of bracket
01157     to Workspace at term
01158 */
01159 strip:
01160     next = fi->POfill;
01161     nextstop = next + *next; nextstop -= ABS(nextstop[-1]);
01162     next++;
01163     tp++;
01164     lp = PF_CurrentBracket + 1;
01165     while ( next < nextstop ) {
01166         if ( *next == HAAKJE ) {
01167             fi->POfill += *fi->POfill;
01168             while ( next < fi->POfill ) *lp++ = *next++;
01169             *PF_CurrentBracket = lp - PF_CurrentBracket;
01170             *lp = 0;

```

```

01171             *tp++ = 1;
01172             *tp++ = 1;
01173             *tp++ = 3;
01174             *term = WORDDIF(tp,term);
01175             PRINTFBUF("PF_GetTerm new brack",PF_CurrentBracket,*PF_CurrentBracket);
01176             PRINTFBUF("PF_GetTerm POfill",fi->POfill,*fi->POfill);
01177             goto RegRet;
01178         }
01179         np = next; next += next[1];
01180         while ( np < next ) *tp++ = *lp++ = *np++;
01181     }
01182     tp = term;
01183     /*
01184     #] copy :
01185     */
01186 }
01187
01188     i = *fi->POfill;
01189     while ( i-- ) *tp++ = *fi->POfill++;
01190 RegRet:
01191     PRINTFBUF("PF_GetTerm returns",term,*term);
01192     return(*term);
01193 }
01194
01195 /*
01196     #] PF_GetTerm :
01197     #[ PF_Deferred :
01198     */
01199
01200 WORD PF_Deferred(WORD *term, WORD level)
01201 {
01210     GETIDENTITY
01211     WORD *bra, *bstop;
01212     WORD *tstart;
01213     FILEHANDLE *fi = AC.RhsExprInModuleFlag && PF.rhsInParallel ? &PF.slavebuf : AR.infile;
01214     WORD *next = fi->POfill;
01215     WORD *termout = AT.WorkPointer;
01216     WORD *oldwork = AT.WorkPointer;
01217
01218     AT.WorkPointer = (WORD *) ((UBYTE *) (AT.WorkPointer) + AM.MaxTer);
01219     AR.DeferFlag = 0;
01220
01221     PRINTFBUF("PF_Deferred (Term) ",term,*term);
01222     PRINTFBUF("PF_Deferred (Bracket)",PF_CurrentBracket,*PF_CurrentBracket);
01223
01224     bra = bstop = PF_CurrentBracket;
01225     if ( *bstop > 0 ) {
01226         bstop += *bstop;
01227         bstop -= ABS(bstop[-1]);
01228     }
01229     bra++;
01230     while ( *bra != HAAKJE && bra < bstop ) bra += bra[1];
01231     if ( bra >= bstop ) { /* No deferred action! */
01232         AT.WorkPointer = term + *term;
01233         if ( Generator(BHEAD term,level) ) goto DefCall;
01234         AR.DeferFlag = 1;
01235         AT.WorkPointer = oldwork;
01236         return(0);
01237     }
01238     bstop = bra;
01239     tstart = bra + bra[1];
01240     bra = PF_CurrentBracket;
01241     tstart--;
01242     *tstart = bra + *bra - tstart;
01243     bra++;
01244     /*
01245         Status of affairs:
01246         First bracket content starts at tstart.
01247         Next term starts at next.
01248         The outside of the bracket runs from bra = PF_CurrentBracket to bstop.
01249     */
01250     for(;;) {
01251         if ( InsertTerm(BHEAD term,0,AM.rbufnum,tstart,termout,0) < 0 ) {
01252             goto DefCall;
01253         }
01254         /*
01255             call Generator with new composed term
01256         */
01257         AT.WorkPointer = termout + *termout;
01258         if ( Generator(BHEAD termout,level) ) goto DefCall;
01259         AT.WorkPointer = termout;
01260         tstart = next + 1;
01261         if ( tstart >= fi->POfull ) goto ThatsIt;
01262         next += *next;
01263         /*
01264             compare with current bracket
01265         */

```

```

01266         while ( bra <= bstop ) {
01267             if ( *bra != *tstart ) goto ThatsIt;
01268             bra++; tstart++;
01269         }
01270 /*
01271         now bra and tstart should both be a HAAKJE
01272 */
01273     bra--; tstart--;
01274     if ( *bra != HAAKJE || *tstart != HAAKJE ) goto ThatsIt;
01275     tstart += tstart[1];
01276     tstart--;
01277     *tstart = next - tstart;
01278     bra = PF_CurrentBracket + 1;
01279 }
01280
01281 ThatsIt:
01282 /*
01283     AT.WorkPointer = oldwork;
01284 */
01285     AR.DeferFlag = 1;
01286     return(0);
01287 DefCall:
01288     MesCall("PF_Deferred");
01289     SETERROR(-1);
01290 }
01291
01292 /*
01293     #] PF_Deferred :
01294     #[ PF_Wait4Slave :
01295 */
01296
01297 static LONG **PF_W4Sstats = 0;
01298
01305 static int PF_Wait4Slave(int src)
01306 {
01307     int j, tag, next;
01308
01309     tag = PF_ANY_MSGTAG;
01310     PF_CatchErrorMessages(&src, &tag);
01311     PF_Receive(src, tag, &next, &tag);
01312
01313     if ( tag != PF_READY_MSGTAG ) {
01314         MesPrint("[%d] PF_Wait4Slave: received MSGTAG %d", (WORD)PF.me, (WORD)tag);
01315         return(-1);
01316     }
01317     if ( PF_W4Sstats == 0 ) {
01318         PF_W4Sstats = (LONG**)Malloca(sizeof(LONG*), "");
01319         PF_W4Sstats[0] = (LONG*)Malloca(PF_STATS_SIZE*sizeof(LONG), "");
01320     }
01321     PF_Unpack(PF_W4Sstats[0], PF_STATS_SIZE, PF_LONG);
01322     PF_Statistics(PF_W4Sstats, next);
01323
01324     PF_Unpack(&j, 1, PF_INT);
01325
01326     if ( j ) {
01327 /*
01328         actions depending on rest of information in last message
01329 */
01330     }
01331     return(next);
01332 }
01333
01334 /*
01335     #] PF_Wait4Slave :
01336     #[ PF_Wait4SlaveIP :
01337 */
01338 /*
01339     array of expression numbers for PF_InParallel processor.
01340     Each time the master sends expression "i" to the slave
01341     "next" it sets partodoexr[next]=i:
01342 */
01343 static WORD *partodoexr=NULL;
01344
01352 static int PF_Wait4SlaveIP(int *src)
01353 {
01354     int j, tag, next;
01355
01356     tag = PF_ANY_MSGTAG;
01357     PF_CatchErrorMessages(src, &tag);
01358     PF_Receive(*src, tag, &next, &tag);
01359     *src=tag;
01360     if ( PF_W4Sstats == 0 ) {
01361         PF_W4Sstats = (LONG**)Malloca(sizeof(LONG*), "");
01362         PF_W4Sstats[0] = (LONG*)Malloca(PF_STATS_SIZE*sizeof(LONG), "");
01363     }
01364
01365     PF_Unpack(PF_W4Sstats[0], PF_STATS_SIZE, PF_LONG);

```



```

01366     if ( tag == PF_DATA_MSGTAG )
01367         AR.CurExpr = partodoexr[next];
01368     PF_Statistics(PF_W4Sstats,next);
01369
01370     PF_Unpack(&j,1,PF_INT);
01371
01372     if ( j ) {
01373         /* actions depending on rest of information in last message */
01374     }
01375
01376     return(next);
01377 }
01378 /*
01379     #] PF_Wait4SlaveIP :
01380     #[ PF_WaitAllSlaves :
01381 */
01382
01391 static int PF_WaitAllSlaves(void)
01392 {
01393     int i, readySlaves, tag, next = PF_ANY_SOURCE;
01394     UBYTE *has_sent = 0;
01395
01396     has_sent = (UBYTE*)Malloc1(sizeof(UBYTE)*(PF.numtasks + 1),"PF_WaitAllSlaves");
01397     for ( i = 0; i < PF.numtasks; i++ ) has_sent[i] = 0;
01398
01399     for ( readySlaves = 1; readySlaves < PF.numtasks; ) {
01400         if ( next != PF_ANY_SOURCE ) { /*Go to the next slave:*/
01401             do{ /*Note, here readySlaves<PF.numtasks, so this loop can't be infinite*/
01402                 if ( ++next >= PF.numtasks ) next = 1;
01403             } while ( has_sent[next] == 1 );
01404         }
01405         /*
01406             Here PF_ProbeWithCatchingErrorMessages() is BLOCKING function if next = PF_ANY_SOURCE:
01407         */
01408         tag = PF_ProbeWithCatchingErrorMessages(&next);
01409         /*
01410             Here next != PF_ANY_SOURCE
01411         */
01412         switch ( tag ) {
01413             case PF_BUFFER_MSGTAG:
01414             case PF_ENDBUFFER_MSGTAG:
01415                 /*
01416                     Slaves are ready to send their results back
01417                 */
01418                 if ( has_sent[next] == 0 ) {
01419                     has_sent[next] = 1;
01420                     readySlaves++;
01421                 }
01422                 else { /*error?*/
01423                     fprintf(stderr,"ERROR next=%d tag=%d\n",next,tag);
01424                 }
01425                 /*
01426                     Note, we do NOT read results here! Messages from these slaves will be read
01427                     only after all slaves are ready, further in caller function
01428                 */
01429                 break;
01430             case 0:
01431                 /*
01432                     The slave is not ready. Just go to the next slave.
01433                     It may appear that there are no more ready slaves, and the master
01434                     will wait them in infinite loop. Stupid situation - the master can
01435                     receive buffers from ready slaves!
01436                 */
01437                 #ifdef PF_WITH_SCHED_YIELD
01438                 /*
01439                     Relinquish the processor:
01440                 */
01441                 sched_yield();
01442                 #endif
01443                 break;
01444             case PF_DATA_MSGTAG:
01445                 tag=next;
01446                 next=PF_Wait4SlaveIP(&tag);
01447         }
01448         /* tag must be == PF_DATA_MSGTAG!
01449         */
01450         PF_Statistics(PF_stats,0);
01451         PF_Slave2MasterIP(next);
01452         PF_Master2SlaveIP(next,NULL);
01453         if ( has_sent[next] == 0 ) {
01454             has_sent[next]=1;
01455             readySlaves++;
01456         }
01457         else{
01458             /*error?*/
01459             fprintf(stderr,"ERROR next=%d tag=%d\n",next,tag);
01460             /*if ( has_sent[next] == 0 )*/
01461             break;

```

```

01461         case PF_EMPTY_MSGTAG:
01462             tag=next;
01463             next=PF_Wait4SlaveIP(&tag);
01464     /*
01465     tag must be == PF_EMPTY_MSGTAG!
01466     */
01467         PF_Master2SlaveIP(next,NULL);
01468         if ( has_sent[next] == 0 ) {
01469             has_sent[next]=1;
01470             readySlaves++;
01471         }else{
01472             /*error?*/
01473             fprintf(stderr,"ERROR next=%d tag=%d\n",next,tag);
01474             /*if ( has_sent[next] == 0 )*/
01475             break;
01476         case PF_READY_MSGTAG:
01477     /*
01478         idle slave
01479         May be only PF_READY_MSGTAG:
01480     */
01481         next = PF_Wait4Slave(next);
01482         if ( next == -1 ) return(next); /*Cannot be!*/
01483         if ( has_sent[0] == 0 ) { /*Send the last chunk to the slave*/
01484             PF.sbuf->active = 0;
01485             has_sent[0] = 1;
01486         }
01487         else {
01488     /*
01489             Last chunk was sent, so just send to slave ENDSORT
01490             AN.ninterms must be sent because the slave expects it:
01491     */
01492             PACK_LONG(PF.sbuf->fill[next], AN.ninterms);
01493     /*
01494             This will tell to the slave that there are no more terms:
01495     */
01496             *(PF.sbuf->fill[next])++ = 0;
01497             PF.sbuf->active = next;
01498         }
01499     /*
01500             Send ENDSORT
01501     */
01502             PF_ISendSbuf(next,PF_ENDSORT_MSGTAG);
01503             break;
01504         default:
01505     /*
01506             Error?
01507             Indicates the error. This will force exit from the main loop:
01508     */
01509             MesPrint("!!!Unexpected MPI message src=%d tag=%d.", next, tag);
01510             readySlaves = PF.numtasks+1;
01511             break;
01512         }
01513     }
01514
01515     if ( has_sent ) M_free(has_sent,"PF_WaitAllSlaves");
01516     /*
01517     0 on success (exit from the main loop by loop condition), or -1 if fails
01518     (exit from the main loop since readySlaves=PF.numtasks+1):
01519     */
01520     return(PF.numtasks-readySlaves);
01521 }
01522
01523 /*
01524     #] PF_WaitAllSlaves :
01525     #[ PF_Processor :
01526 */
01527
01540 int PF_Processor(EXPRESSIONS e, WORD i, WORD LastExpression)
01541 {
01542     GETIDENTITY
01543     WORD *term = AT.WorkPointer;
01544     LONG dd = 0;
01545     PF_BUFFER *sb = PF.sbuf;
01546     WORD j, *s, next;
01547     LONG size, cpu;
01548     POSITION position;
01549     int k, src, tag;
01550     FILEHANDLE *oldoutfile = AR.outfile;
01551
01552 #ifdef MPI2
01553     if ( PF_shared_buff == NULL ) {
01554         if ( PF_SMWin_Init() == 0 ) {
01555             MesPrint("PF_SMWin_Init error");
01556             exit(-1);
01557         }
01558     }
01559 #endif

```

```

01560
01561     if ( ( (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer ) > AT.WorkTop ) return(MesWork());
01562
01563     /* For redefine statements. */
01564     if ( AC.numpfirstnum > 0 ) {
01565         for ( j = 0; j < AC.numpfirstnum; j++ ) {
01566             AC.inputnumbers[j] = -1;
01567         }
01568     }
01569
01570     if ( AC.mparalleelflag != PARALLELEFLAG ) return(0);
01571
01572     if ( PF.me == MASTER ) {
01573         /*
01574             #[ Master:
01575             #[ write prototype to outfile:
01576         */
01577         WORD oldBracketOn = AR.BraceOn;
01578         WORD *oldBrackBuf = AT.BrackBuf;
01579         WORD oldbracketindexflag = AT.bracketindexflag;
01580
01581         LONG maxinterms; /* the maximum number of terms in the bucket */
01582         int cmaxinterms; /* a variable controlling the transition of maxinterms */
01583         LONG termsinbucket; /* the number of filled terms in the bucket */
01584         LONG ProcessBucketSize = AC.mProcessBucketSize;
01585
01586         if ( PF.log && AC.CModule >= PF.log )
01587             MesPrint("[%d] working on expression %s in module %l", PF.me, EXPRNAME(i), AC.CModule);
01588         if ( GetTerm(BHEAD term) <= 0 ) {
01589             MesPrint("[%d] Expression %d has problems in scratchfile", PF.me, i);
01590             return(-1);
01591         }
01592         term[3] = i;
01593         if ( AR.outtohide ) {
01594             SeekScratch(AR.hidefile, &position);
01595             e->onfile = position;
01596             if ( PutOut(BHEAD term, &position, AR.hidefile, 0) < 0 ) return(-1);
01597         }
01598         else {
01599             SeekScratch(AR.outfile, &position);
01600             e->onfile = position;
01601             if ( PutOut(BHEAD term, &position, AR.outfile, 0) < 0 ) return(-1);
01602         }
01603         AR.DeferFlag = 0; /* The master leave the brackets!!! */
01604         AR.Eside = RHSIDE;
01605         if ( ( e->vflags & ISFACTORIZED ) != 0 ) {
01606             AR.BraceOn = 1;
01607             AT.BrackBuf = AM.BraceFactors;
01608             AT.bracketindexflag = 1;
01609         }
01610         if ( AT.bracketindexflag > 0 ) OpenBracketIndex(i);
01611         /*
01612             #[ write prototype to outfile:
01613             #[ initialize sendbuffer if necessary:
01614
01615             the size of the sendbufs is:
01616             MIN(1/PF.numtasks*(AT.SS->sBufsize+AT.SS->lBufsize), AR.infile->Psize)
01617             No allocation for extra buffers necessary, just make sb->buf... point
01618             to the right places in the sortbuffers.
01619         */
01620         NewSort(BHEAD0); /* we need AT.SS to be set for this!!! */
01621         if ( sb == 0 || sb->buff[0] != AT.SS->lBuffer ) {
01622             size = (LONG) ((AT.SS->sTop2 - AT.SS->lBuffer) / (PF.numtasks));
01623             if ( size > (LONG) (AR.infile->Psize/sizeof(WORD) - 1) )
01624                 size = AR.infile->Psize/sizeof(WORD) - 1;
01625             if ( sb == 0 ) {
01626                 if ( ( sb = PF_AllocBuf(PF.numtasks, size*sizeof(WORD), PF.numtasks) ) == NULL )
01627                     return(-1);
01628             }
01629             sb->buff[0] = AT.SS->lBuffer;
01630             sb->full[0] = sb->fill[0] = sb->buff[0];
01631             for ( j = 1; j < PF.numtasks; j++ ) {
01632                 sb->stop[j-1] = sb->buff[j] = sb->buff[j-1] + size;
01633             }
01634             sb->stop[PF.numtasks-1] = sb->buff[PF.numtasks-1] + size;
01635             PF.sbuf = sb;
01636         }
01637         for ( j = 0; j < PF.numtasks; j++ ) {
01638             sb->full[j] = sb->fill[j] = sb->buff[j];
01639         }
01640         /*
01641             #[ initialize sendbuffer if necessary:
01642             #[ loop for all terms in infile:
01643         */
01644         /*
01645             * The initial value of maxinterms is determined by the user given
01646             * ProcessBucketSize and the number of terms in the current expression.

```

```

01647      * We make the initial maxinterms smaller, so that we get the all
01648      * workers busy as soon as possible.
01649      */
01650      maxinterms = ProcessBucketSize / 100;
01651      if ( maxinterms > e->counter / (PF.numtasks - 1) / 4 )
01652          maxinterms = e->counter / (PF.numtasks - 1) / 4;
01653      if ( maxinterms < 1 ) maxinterms = 1;
01654      cmaxinterms = 0;
01655      /*
01656      * Copy them always to sb->buff[0]. When that is full, wait for
01657      * the next slave to accept terms, exchange sb->buff[0] and
01658      * sb->buff[next], send sb->buff[next] to next slave and go on
01659      * filling the now empty sb->buff[0].
01660      */
01661      AN.ninterms = 0;
01662      termsinbucket = 0;
01663      PACK_LONG(sb->fill[0], 1);
01664      while ( GetTerm(BHEAD term) ) {
01665          AN.ninterms++; dd = AN.deferskipped;
01666          if ( AC.CollectFun && *term <= (LONG)(AM.MaxTer/(2*sizeof(WORD))) ) {
01667              if ( GetMoreTerms(term) < 0 ) {
01668                  LowerSortLevel(); return(-1);
01669              }
01670          }
01671          PRINTFBUF("PF_Processor gets",term,*term);
01672          if ( termsinbucket >= maxinterms || sb->fill[0] + *term >= sb->stop[0] ) {
01673              next = PF_Wait4Slave(PF_ANY_SOURCE);
01674
01675              sb->fill[next] = sb->fill[0];
01676              sb->full[next] = sb->full[0];
01677              SWAP(sb->stop[next], sb->stop[0]);
01678              SWAP(sb->buff[next], sb->buff[0]);
01679              sb->fill[0] = sb->full[0] = sb->buff[0];
01680              sb->active = next;
01681
01682          #ifdef MPI2
01683              if ( PF_Put_origin(next) == 0 ) {
01684                  printf("PF_Put_origin error...\n");
01685              }
01686          #else
01687              PF_ISendSbuf(next,PF_TERM_MSGTAG);
01688          #endif
01689
01690          /* Initialize the next bucket. */
01691          termsinbucket = 0;
01692          PACK_LONG(sb->fill[0], AN.ninterms);
01693          /*
01694          * For the "slow startup". We double maxinterms up to ProcessBucketSize
01695          * after (hopefully) the all workers got some terms.
01696          */
01697          if ( cmaxinterms >= PF.numtasks - 2 ) {
01698              maxinterms *= 2;
01699              if ( maxinterms >= ProcessBucketSize ) {
01700                  cmaxinterms = -1;
01701                  maxinterms = ProcessBucketSize;
01702              }
01703          }
01704          else if ( cmaxinterms >= 0 ) {
01705              cmaxinterms++;
01706          }
01707          j = *(s = term);
01708          NCOPY(sb->fill[0], s, j);
01709          termsinbucket++;
01710      }
01711      /* NOTE: The last chunk will be sent to a slave at EndSort() => PF_EndSort()
01712      *      => PF_WaitAllSlaves(). */
01713      AN.ninterms += dd;
01714      /*
01715      #] loop for all terms in infile:
01716      #[ Clean up & EndSort:
01717      */
01718      if ( LastExpression ) {
01719          UpdateMaxSize();
01720          if ( AR.infile->handle >= 0 ) {
01721              CloseFile(AR.infile->handle);
01722              AR.infile->handle = -1;
01723              remove(AR.infile->name);
01724              PUTZERO(AR.infile->P0position);
01725          }
01726          AR.infile->P0fill = AR.infile->P0full = AR.infile->P0buffer;
01727      }
01728      if ( AR.outtohide ) AR.outfile = AR.hidefile;
01729      PF.parallel = 1;
01730      if ( EndSort(BHEAD AM.S0->sBuffer,0) < 0 ) return(-1);
01731      PF.parallel = 0;
01732      if ( AR.outtohide ) {
01733          AR.outfile = oldoutfile;

```

```

01734         AR.hidefile->POfull = AR.hidefile->POfill;
01735     }
01736     UpdateMaxSize();
01737     AR.BraceOn = oldBracketOn;
01738     AT.BrackBuf = oldBrackBuf;
01739     if ( ( e->vflags & TOBEFACTORED ) != 0 )
01740         poly_factorize_expression(e);
01741     else if ( ( ( e->vflags & TOBEUNFACTORED ) != 0 )
01742             && ( ( e->vflags & ISFACTORIZED ) != 0 ) )
01743         poly_unfactorize_expression(e);
01744     AT.bracketindexflag = oldbracketindexflag;
01745     AR.GetFile = 0;
01746     AR.outtohide = 0;
01747     /*
01748     * NOTE: e->numdummies, e->vflags and AR.exprflags will be updated
01749     *       after gathering the information from all slaves.
01750     */
01751 /*
01752     #] Clean up & EndSort:
01753     #[ Collect (stats,prepro,...):
01754 */
01755     DBGOUT_NINTERMS(1, ("PF.me=%d AN.ninterms=%d ENDSORT\n", (int)PF.me, (int)AN.ninterms));
01756     PF_CatchErrorMessagesForAll();
01757     e->numdummies = 0;
01758     for ( k = 1; k < PF.numtasks; k++ ) {
01759         PF_LongSingleReceive(PF_ANY_SOURCE, PF_ENDSORT_MSGTAG, &src, &tag);
01760         PF_LongSingleUnpack(PF_stats[src], PF_STATS_SIZE, PF_LONG);
01761         {
01762             WORD numdummies, expchanged;
01763             PF_LongSingleUnpack(&numdummies, 1, PF_WORD);
01764             PF_LongSingleUnpack(&expchanged, 1, PF_WORD);
01765             if ( e->numdummies < numdummies ) e->numdummies = numdummies;
01766             AR.expchanged |= expchanged;
01767         }
01768         /* Now handle redefined preprocessor variables. */
01769         if ( AC.numpfirstnum > 0 ) PF_UnpackRedefinedPreVars();
01770     }
01771     /* Broadcast redefined preprocessor variables. */
01772     if ( AC.numpfirstnum > 0 ) {
01773         int RetCode = PF_BroadcastRedefinedPreVars();
01774         if ( RetCode ) return RetCode;
01775     }
01776     if ( ! AC.OldParallelStats ) {
01777         /* Now we can calculate AT.SS->GenTerms from the statistics of the slaves. */
01778         LONG genterms = 0;
01779         for ( k = 1; k < PF.numtasks; k++ ) {
01780             genterms += PF_stats[k][3];
01781         }
01782         AT.SS->GenTerms = genterms;
01783         WriteStats(&PF_exprsize, STATSPOSTSORT, NOCHECKLOGTYPE);
01784         Expressions[AR.CurExpr].size = PF_exprsize;
01785     }
01786     PF_Statistics(PF_stats,0);
01787 /*
01788     #] Collect (stats,prepro,...):
01789     #[ Update flags :
01790 */
01791     if ( AM.S0->TermsLeft ) e->vflags &= ~ISZERO;
01792     else e->vflags |= ISZERO;
01793     if ( AR.expchanged == 0 ) e->vflags |= ISUNMODIFIED;
01794     if ( AM.S0->TermsLeft ) AR.expflags |= ISZERO;
01795     if ( AR.expchanged ) AR.expflags |= ISUNMODIFIED;
01796 /*
01797     #] Update flags :
01798     #] Master:
01799 */
01800 }
01801 else {
01802 /*
01803     #[ Slave :
01804 */
01805 /*
01806     #[ Generator Loop & EndSort :
01807
01808     loop for all terms to get from master, call Generator for each of them
01809     then call EndSort and do cleanup (to be implemented)
01810 */
01811     WORD oldBracketOn = AR.BraceOn;
01812     WORD *oldBrackBuf = AT.BrackBuf;
01813     WORD oldbracketindexflag = AT.bracketindexflag;
01814
01815     /* For redefine statements. */
01816     if ( AC.numpfirstnum > 0 ) {
01817         for ( j = 0; j < AC.numpfirstnum; j++ ) {
01818             AC.inputnumbers[j] = -1;
01819         }
01820     }

```

```

01821
01822     SeekScratch(AR.outfile,&position);
01823     e->onfile = position;
01824     AR.DeferFlag = AC.ComDefer;
01825     AR.Eside = RHSIDE;
01826     if ( ( e->vflags & ISFACTORIZED ) != 0 ) {
01827         AR.BracketOn = 1;
01828         AT.BrackBuf = AM.BracketFactors;
01829         AT.bracketindexflag = 1;
01830     }
01831     NewSort(BHEAD0);
01832     AR.MaxDum = AM.IndDum;
01833     AN.ninterms = 0;
01834     PF_linterms = 0;
01835     PF.parallel = 1;
01836 #ifdef MPI2
01837     AR.infile->POfull = AR.infile->POfill = AR.infile->PObuffer = PF_shared_buff;
01838 #endif
01839     {
01840         FILEHANDLE *fi = AC.RhsExprInModuleFlag && PF.rhsInParallel ? &PF.slavebuf : AR.infile;
01841         fi->POfull = fi->POfill = fi->PObuffer;
01842     }
01843     /* FIXME: AN.ninterms is still broken when AN.deferskipped is non-zero.
01844      *      It still needs some work, also in PF_GetTerm(). (TU 30 Aug 2011) */
01845     while ( PF_GetTerm(term) ) {
01846         PF_linterms++; AN.ninterms++; dd = AN.deferskipped;
01847         AT.WorkPointer = term + *term;
01848         AN.RepPoint = AT.RepCount + 1;
01849         if ( ( e->vflags & ISFACTORIZED ) != 0 && term[1] == HAAKJE ) {
01850             StoreTerm(BHEAD term);
01851             continue;
01852         }
01853         if ( AR.DeferFlag ) {
01854             AR.CurDum = AN.IndDum = Expressions[AR.CurExpr].numdummies + AM.IndDum;
01855         }
01856         else {
01857             AN.IndDum = AM.IndDum;
01858             AR.CurDum = ReNumber(BHEAD term);
01859         }
01860         if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMLAG);
01861         if ( AN.ncmod ) {
01862             if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
01863             else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
01864         }
01865         else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
01866         if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
01867             && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
01868             PolyFunClean(BHEAD term);
01869         }
01870         if ( Generator(BHEAD term,0) ) {
01871             MesPrint("[%d] PF_Processor: Error in Generator",PF.me);
01872             LowerSortLevel(); return(-1);
01873         }
01874         PF_linterms += dd; AN.ninterms += dd;
01875     }
01876     PF_linterms += dd; AN.ninterms += dd;
01877     {
01878         /*
01879          * EndSort() overrides AR.outfile->PObuffer etc. (See also PF_EndSort()),
01880          * but it causes a problem because
01881          * (1) PF_EndSort() sets AR.outfile->PObuffer to a send-buffer.
01882          * (2) RevertScratch() clears AR.infile, but then swaps buffers of AR.infile
01883          *     and AR.outfile.
01884          * (3) RHS expressions are stored to AR.infile->PObuffer.
01885          * (4) Again, PF_EndSort() sets AR.outfile->PObuffer, but now AR.outfile->PObuffer
01886          *     == AR.infile->PObuffer because of (1) and (2).
01887          * (5) The result goes to AR.outfile. This breaks the RHS expressions,
01888          *     which may be needed for the next expression.
01889          * Solution: backup & restore AR.outfile->PObuffer etc. (TU 14 Sep 2011)
01890          */
01891         FILEHANDLE *fout = AR.outfile;
01892         WORD *oldbuff = fout->PObuffer;
01893         WORD *oldstop = fout->POstop;
01894         LONG oldsize = fout->POsize;
01895         if ( EndSort(BHEAD AM.S0->sBuffer, 0) < 0 ) return -1;
01896         fout->PObuffer = oldbuff;
01897         fout->POstop = oldstop;
01898         fout->POsize = oldsize;
01899         fout->POfill = fout->POfull = fout->PObuffer;
01900     }
01901     AR.BracketOn = oldBracketOn;
01902     AT.BrackBuf = oldBrackBuf;
01903     AT.bracketindexflag = oldbracketindexflag;
01904     /*
01905      * #] Generator Loop & EndSort :
01906      * #[ Collect (stats,prepro...) :
01907      */

```

```

01908     DBGOUT_NINTERMS(1, ("PF.me=%d AN.ninterms=%d PF_linterms=%d ENDSORT\n", (int)PF.me,
(int)AN.ninterms, (int)PF_linterms));
01909     PF_PrepereLongSinglePack();
01910     cpu = TimeCPU(1);
01911     size = 0;
01912     PF_LongSinglePack(&cpu, 1, PF_LONG);
01913     PF_LongSinglePack(&size, 1, PF_LONG);
01914     PF_LongSinglePack(&PF_linterms, 1, PF_LONG);
01915     PF_LongSinglePack(&AM.S0->GenTerms, 1, PF_LONG);
01916     PF_LongSinglePack(&AM.S0->TermsLeft, 1, PF_LONG);
01917     {
01918         WORD numdummies = AR.MaxDum - AM.IndDum;
01919         PF_LongSinglePack(&numdummies, 1, PF_WORD);
01920         PF_LongSinglePack(&AR.expchanged, 1, PF_WORD);
01921     }
01922     /* Now handle redefined preprocessor variables. */
01923     if ( AC.numpfirstnum > 0 ) PF_PackRedefinedPreVars();
01924     PF_LongSingleSend(MASTER, PF_ENDSORT_MSGTAG);
01925     /* Broadcast redefined preprocessor variables. */
01926     if ( AC.numpfirstnum > 0 ) {
01927         int RetCode = PF_BroadcastRedefinedPreVars();
01928         if ( RetCode ) return RetCode;
01929     }
01930 /*
01931     #] Collect (stats,prepro...) :
01932
01933     This operation is moved to the beginning of each block, see PreProcessor
01934     in pre.c.
01935
01936     #] Slave :
01937 */
01938     if ( PF.log ) {
01939         UBYTE lbuf[24];
01940         NumToStr(lbuf, AC.CModule);
01941         fprintf(stderr, "[%d] Endsort,Collect,Broadcast done\n", PF.me, lbuf);
01942         fflush(stderr);
01943     }
01944 }
01945 return(0);
01946 }
01947
01948 /*
01949     #] PF_Processor :
01950 #] proces.c :
01951 #[ startup :, prepro & compile
01952 #[ PF_Init :
01953 */
01954
01963 int PF_Init(int *argc, char ***argv)
01964 {
01965     /*
01966         this should definitely be somewhere else ...
01967     */
01968     PF_CurrentBracket = 0;
01969
01970     PF.numtasks = 0; /* number of tasks, is determined in PF_LibInit ! */
01971     PF.numbufs = 2; /* might be changed by the environment variable on the master ! */
01972     PF.numrbufs = 2; /* might be changed by the environment variable on the master ! */
01973
01974     int ret = PF_LibInit(argc, argv);
01975     if (ret) { return ret; }
01976     PF_RealTime(PF_RESET);
01977
01978     PF.log = 0;
01979     PF.parallel = 0;
01980     PF_statsinterval = 10;
01981     PF.rhsInParallel=1;
01982     PF.exprbufsize=4096; /*in WORDs*/
01983
01984 #ifdef PF_WITHGETENV
01985     if ( PF.me == MASTER ) {
01986         char *c;
01987     /*
01988         get these from the environment at the moment should be in setfile/tail
01989     */
01990     if ( ( c = getenv("PF_LOG") ) != 0 ) {
01991         if ( *c ) PF.log = (int)atoi(c);
01992         else PF.log = 1;
01993         fprintf(stderr, "[%d] changing PF.log to %d\n", PF.me, PF.log);
01994         fflush(stderr);
01995     }
01996     if ( ( c = (char*)getenv("PF_RBUFS") ) != 0 ) {
01997         PF.numrbufs = (int)atoi(c);
01998         fprintf(stderr, "[%d] changing numrbufs to: %d\n", PF.me, PF.numrbufs);
01999         fflush(stderr);
02000     }
02001     if ( ( c = (char*)getenv("PF_SBUFS") ) != 0 ) {

```

```

02002         PF.numsbufs = (int)atoi(c);
02003         fprintf(stderr, "[%d] changing numsbufs to: %d\n", PF.me, PF.numsbufs);
02004         fflush(stderr);
02005     }
02006     if ( PF.numsbufs > 10 ) PF.numsbufs = 10;
02007     if ( PF.numsbufs < 1 ) PF.numsbufs = 1;
02008     if ( PF.numrbufs > 2 ) PF.numrbufs = 2;
02009     if ( PF.numrbufs < 1 ) PF.numrbufs = 1;
02010
02011     if ( ( c = getenv("PF_STATS") ) ) {
02012         UBYTE lbuf[24];
02013         PF_statsinterval = (int)atoi(c);
02014         NumToStr(lbuf, PF_statsinterval);
02015         fprintf(stderr, "[%d] changing PF_statsinterval to %s\n", PF.me, lbuf);
02016         fflush(stderr);
02017         if ( PF_statsinterval < 1 ) PF_statsinterval = 10;
02018     }
02019 }
02020 #endif
02021 /*
02022  #[ Broadcast settings from getenv: could also be done in PF_DoSetup
02023 */
02024 if ( PF.me == MASTER ) {
02025     PF_PrepPack();
02026     PF_Pack(&PF.log, 1, PF_INT);
02027     PF_Pack(&PF.numrbufs, 1, PF_WORD);
02028     PF_Pack(&PF.numsbufs, 1, PF_WORD);
02029 }
02030 PF_Broadcast();
02031 if ( PF.me != MASTER ) {
02032     PF_Unpack(&PF.log, 1, PF_INT);
02033     PF_Unpack(&PF.numrbufs, 1, PF_WORD);
02034     PF_Unpack(&PF.numsbufs, 1, PF_WORD);
02035     if ( PF.log ) {
02036         fprintf(stderr, "[%d] log=%d rbufs=%d sbufs=%d\n",
02037             PF.me, PF.log, PF.numrbufs, PF.numsbufs);
02038         fflush(stderr);
02039     }
02040 }
02041 /*
02042  #] Broadcast settings from getenv:
02043 */
02044 return(0);
02045 }
02046 /*
02047     #] PF_Init :
02048     #[ PF_Terminate :
02049 */
02050
02058 int PF_Terminate(int errorcode)
02059 {
02060     return PF_LibTerminate(errorcode);
02061 }
02062
02063 /*
02064     #] PF_Terminate :
02065     #[ PF_GetSlaveTimes :
02066 */
02067
02074 LONG PF_GetSlaveTimes(void)
02075 {
02076     LONG slavetimes = 0;
02077     LONG t = PF.me == MASTER ? 0 : AM.SumTime + TimeCPU(1);
02078     MPI_Reduce(&t, &slavetimes, 1, PF_LONG, MPI_SUM, MASTER, PF_COMM);
02079     return slavetimes;
02080 }
02081
02082 /*
02083     #] PF_GetSlaveTimes :
02084     #] startup :
02085     #[ PF_BroadcastNumber :
02086 */
02087
02094 LONG PF_BroadcastNumber(LONG x)
02095 {
02096     #ifdef PF_DEBUG_BCAST_LONG
02097         if ( PF.me == MASTER ) {
02098             MesPrint(">> Broadcast LONG: %l", x);
02099         }
02100     #endif
02101     PF_Bcast(&x, sizeof(LONG));
02102     return x;
02103 }
02104
02105 /*
02106     #] PF_BroadcastNumber :
02107     #[ PF_BroadcastBuffer :

```



```

02108 */
02109
02121 void PF_BroadcastBuffer(WORD **buffer, LONG *length)
02122 {
02123     WORD *p;
02124     LONG rest;
02125 #ifdef PF_DEBUG_BCAST_BUF
02126     if ( PF.me == MASTER ) {
02127         MesPrint("» Broadcast Buffer: length=%l", *length);
02128     }
02129 #endif
02130     /* Initialize the buffer on the slaves. */
02131     if ( PF.me != MASTER ) {
02132         *buffer = NULL;
02133     }
02134     /* Broadcast the length of the buffer. */
02135     *length = PF_BroadcastNumber(*length);
02136     if ( *length <= 0 ) return;
02137     /* Allocate the buffer on the slaves. */
02138     if ( PF.me != MASTER ) {
02139         *buffer = (WORD *)Malloc1(*length * sizeof(WORD), "PF_BroadcastBuffer");
02140     }
02141     /* Broadcast the data in the buffer. */
02142     p = *buffer;
02143     rest = *length;
02144     while ( rest > 0 ) {
02145         int l = rest < (LONG)PF.exprbufsize ? (int)rest : PF.exprbufsize;
02146         PF_Bcast(p, l * sizeof(WORD));
02147         p += l;
02148         rest -= l;
02149     }
02150 }
02151
02152 /*
02153 #] PF_BroadcastBuffer :
02154 #[ PF_BroadcastString :
02155 */
02156
02163 int PF_BroadcastString(UBYTE *str)
02164 {
02165     int clength = 0;
02166     /*
02167         If string does not fit to the PF_buffer, it
02168         will be split into chunks. Next chunk is started at str+clength
02169     */
02170     UBYTE *cstr=str;
02171     /*
02172         Note, compilation is performed INDEPENDENTLY on AC.mparallelfalg!
02173         No if ( AC.mparallelfalg == PARALLELFALG ) !!
02174     */
02175     do {
02176         cstr += clength; /*at each step for all slaves and master */
02177         if ( MASTER == PF.me ) { /*Pack str*/
02178             /*
02179             initialize buffers
02180             */
02181             if ( PF_PreparePack() != 0 ) Terminate(-1);
02182             if ( ( clength = PF_PackString(cstr) ) < 0 ) Terminate(-1);
02183             PF_Broadcast();
02184             if ( MASTER != PF.me ) {
02185                 /*
02186                 Slave - unpack received string
02187                 For slaves buffers are initialised automatically.
02188                 */
02189                 if ( ( clength = PF_UnpackString(cstr) ) < 0 ) Terminate(-1);
02190             } while ( cstr[clength-1] != '\0' );
02191             return (0);
02192         }
02193     } while ( cstr[clength-1] != '\0' );
02194     return (0);
02195 }
02196
02197
02198 /*
02199 #] PF_BroadcastString :
02200 #[ PF_BroadcastPreDollar :
02201 */
02202
02218 int PF_BroadcastPreDollar(WORD **dbuffer, LONG *newsize, int *numterms)
02219 {
02220     int err = 0;
02221     LONG i;
02222     /*
02223         Note, compilation is performed INDEPENDENTLY on AC.mparallelfalg!
02224         No if (AC.mparallelfalg==PARALLELFALG) !!
02225     */
02226     if ( MASTER == PF.me ) {

```

```

02227 /*
02228     The problem is that sometimes dollar variables are longer
02229     than PF_packbuf! So we split long expression into chunks.
02230     There are n filled chunks and one partially filled chunk:
02231 */
02232     LONG n = ((*newsize)+1)/PF_maxDollarChunkSize;
02233 /*
02234     ...and one more chunk for the rest; if the expression fits to
02235     the buffer without splitting, the latter will be the only one.
02236
02237     PF_maxDollarChunkSize is the maximal number of items fitted to
02238     the buffer. It is calculated in PF_LibInit() in mpi.c.
02239     PF_maxDollarChunkSize is calculated for the first step, when
02240     two fields (numterms and newsize, see below) are already packed.
02241     For simplicity, this value is used also for all steps, in
02242     despite of it is a bit less than maximally available space.
02243 */
02244     WORD *thechunk = *dbuffer;
02245
02246     err = PF_PreparePack();
02247     err |= PF_Pack(numterms,1,PF_INT);
02248     err |= PF_Pack(newsize,1,PF_LONG); /* pack the size */
02249 /*
02250     Pack and broadcast completely filled chunks.
02251     It may happen, this loop is not entered at all:
02252 */
02253     for ( i = 0; i < n; i++ ) {
02254         err |= PF_Pack(thechunk,PF_maxDollarChunkSize,PF_WORD);
02255         err |= PF_Broadcast();
02256         thechunk += PF_maxDollarChunkSize;
02257         PF_PreparePack();
02258     }
02259 /*
02260     Pack and broadcast the rest:
02261 */
02262     if ( ( n = ( (*newsize)+1)%PF_maxDollarChunkSize ) != 0 ) {
02263         err |= PF_Pack(thechunk,n,PF_WORD);
02264         err |= PF_Broadcast();
02265     }
02266 #ifdef PF_DEBUG_BCAST_PREDOLLAR
02267     MesPrint("> Broadcast PreDollar: newsize=%d numterms=%d", (int)*newsize, *numterms);
02268 #endif
02269 }
02270 if ( MASTER != PF.me ) { /* Slave - unpack received buffer */
02271     WORD *thechunk;
02272     LONG n, therest, thesize;
02273     err |= PF_Broadcast();
02274     err |= PF_Unpack(numterms,1,PF_INT);
02275     err |= PF_Unpack(newsize,1,PF_LONG);
02276 /*
02277     Now we know the buffer size.
02278 */
02279     thesize = (*newsize)+1;
02280 /*
02281     Evaluate the number of completely filled chunks. The last step must be
02282     treated separately, so -1:
02283 */
02284     n = (thesize/PF_maxDollarChunkSize) - 1;
02285 /*
02286     Note, here n can be <0, this is ok.
02287 */
02288     therest = thesize % PF_maxDollarChunkSize;
02289     thechunk = *dbuffer =
02290         (WORD*)Malloc1( thesize * sizeof(WORD), "$-buffer slave");
02291     if ( thechunk == NULL ) return(err|4);
02292 /*
02293     Unpack completely filled chunks and receive the next portion.
02294     It may happen, this loop is not entered at all:
02295 */
02296     for ( i = 0; i < n; i++ ) {
02297         err |= PF_Unpack(thechunk,PF_maxDollarChunkSize,PF_WORD);
02298         thechunk += PF_maxDollarChunkSize;
02299         err |= PF_Broadcast();
02300     }
02301 /*
02302     Now the last completely filled chunk:
02303 */
02304     if ( n >= 0 ) {
02305         err |= PF_Unpack(thechunk,PF_maxDollarChunkSize,PF_WORD);
02306         thechunk += PF_maxDollarChunkSize;
02307         if ( therest != 0 ) err |= PF_Broadcast();
02308     }
02309 /*
02310     Unpack the rest (it is already received!):
02311 */
02312     if ( therest != 0 ) err |= PF_Unpack(thechunk,therest,PF_WORD);
02313 }

```

```

02314     return (err);
02315 }
02316
02317 /*
02318 #] PF_BroadcastPreDollar :
02319 #[ Synchronization of modified dollar variables :
02320     #[ Helper functions :
02321         #[ dollarlen :
02322 */
02323
02327 static inline LONG dollarlen(const WORD *terms)
02328 {
02329     const WORD *p = terms;
02330     while ( *p ) p += *p;
02331     return p - terms; /* Not including the null terminator. */
02332 }
02333
02334 /*
02335     #] dollarlen :
02336     #[ dollar_mod_type :
02337 */
02338
02343 static inline WORD dollar_mod_type(WORD index)
02344 {
02345     int i;
02346     for ( i = 0; i < NumModOptdollars; i++ )
02347         if ( ModOptdollars[i].number == index ) break;
02348     if ( i >= NumModOptdollars ) return -1;
02349     return ModOptdollars[i].type;
02350 }
02351
02352
02353 /*
02354     #] dollar_mod_type :
02355     #] Helper functions :
02356     #[ PF_CollectModifiedDollars :
02357 */
02358
02359 /*
02360     #[ dollar_to_be_collected :
02361 */
02362
02367 static inline int dollar_to_be_collected(WORD index)
02368 {
02369     switch ( dollar_mod_type(index) ) {
02370     case MODSUM:
02371     case MODMAX:
02372     case MODMIN:
02373         return 1;
02374     default:
02375         return 0;
02376     }
02377 }
02378
02379 /*
02380     #] dollar_to_be_collected :
02381     #[ copy_dollar :
02382 */
02383
02388 static inline void copy_dollar(WORD index, WORD type, const WORD *where, LONG size)
02389 {
02390     DOLLARS d = Dollars + index;
02391
02392     CleanDollarFactors(d);
02393
02394     if ( type != DOLZERO && where != NULL && where != &AM.dollarzero && where[0] != 0 && size > 0 ) {
02395         if ( size > d->size || size < d->size / 4 ) { /* Reallocate if not enough or too much. */
02396             if ( d->where && d->where != &AM.dollarzero )
02397                 M_free(d->where, "old content of dollar");
02398             d->where = Malloc1(sizeof(WORD) * size, "copy buffer to dollar");
02399             d->size = size;
02400         }
02401         d->type = type;
02402         WCOPY(d->where, where, size);
02403     }
02404     else {
02405         if ( d->where && d->where != &AM.dollarzero )
02406             M_free(d->where, "old content of dollar");
02407         d->type = DOLZERO;
02408         d->where = &AM.dollarzero;
02409         d->size = 0;
02410     }
02411 }
02412
02413 /*
02414     #] copy_dollar :
02415     #[ compare_two_expressions :

```

```

02416 */
02417
02422 static inline int compare_two_expressions(const WORD *e1, const WORD *e2)
02423 {
02424     GETIDENTITY
02425     /*
02426      * We consider the cases that
02427      *   (1) the expression has no term,
02428      *   (2) the expression has only one term and it is a number,
02429      *   (3) otherwise.
02430      * Assume that the expressions are sorted and all terms are normalized.
02431      * The numerators of the coefficients must never be zero.
02432      *
02433      * Note that TwoExprCompare() is not adequate for our purpose
02434      * (as of 6 Aug. 2013), e.g., TwoExprCompare({0}, {4, 1, 1, -1}, LESS)
02435      * returns TRUE.
02436      */
02437     if ( e1[0] == 0 ) {
02438         if ( e2[0] == 0 ) {
02439             return(0);
02440         }
02441         else if ( e2[e2[0]] == 0 && e2[0] == ABS(e2[e2[0] - 1]) + 1 ) {
02442             if ( e2[e2[0] - 1] > 0 )
02443                 return(-1);
02444             else
02445                 return(+1);
02446         }
02447     }
02448     else if ( e1[e1[0]] == 0 && e1[0] == ABS(e1[e1[0] - 1]) + 1 ) {
02449         if ( e2[0] == 0 ) {
02450             if ( e1[e1[0] - 1] > 0 )
02451                 return(+1);
02452             else
02453                 return(-1);
02454         }
02455         else if ( e2[e2[0]] == 0 && e2[0] == ABS(e2[e2[0] - 1]) + 1 ) {
02456             return(CompCoef((WORD *)e1, (WORD *)e2));
02457         }
02458     }
02459     /* The expressions are not so simple. Define the order by each term. */
02460     while ( e1[0] && e2[0] ) {
02461         int c = CompareTerms(BHEAD (WORD *)e1, (WORD *)e2, 1);
02462         if ( c < 0 )
02463             return(-1);
02464         else if ( c > 0 )
02465             return(+1);
02466         e1 += e1[0];
02467         e2 += e2[0];
02468     }
02469     if ( e1[0] ) return(+1);
02470     if ( e2[0] ) return(-1);
02471     return(0);
02472 }
02473
02474 /*
02475     #] compare_two_expressions :
02476     #[ Variables :
02477 */
02478
02479 typedef struct {
02480     VectorStruct(WORD) buf;
02481     LONG size;
02482     WORD type;
02483 } dollar_buf;
02484
02485 /* Buffers used to store data for each variable from each slave. */
02486 static Vector(dollar_buf, dollar_slave_bufs);
02487
02488 /*
02489     #] Variables :
02490 */
02491
02505 int PF_CollectModifiedDollars(void)
02506 {
02507     int i, j, ndollars;
02508     /*
02509      * If the current module was executed in the sequential mode,
02510      * there are no modified module on the slaves.
02511      */
02512     if ( AC.mparallelflag != PARALLELFLAG && !AC.partodoflag ) return 0;
02513     /*
02514      * Count the number of (potentially) modified dollar variables, which we need to collect.
02515      * Here we need to collect all max/min/sum variables.
02516      */
02517     ndollars = 0;
02518     for ( i = 0; i < NumPotModdollars; i++ ) {
02519         WORD index = PotModdollars[i];

```

```

02520         if ( dollar_to_be_collected(index) ) ndollars++;
02521     }
02522     if ( ndollars == 0 ) return 0;  /* No dollars to be collected. */
02523
02524     if ( PF.me == MASTER ) {
02525         /*
02526             # [ Master :
02527         */
02528         int nslaves, nvars;
02529         /* Prepare receive buffers. We need ndollars*(PF.numtasks-1) buffers. */
02530         int nbufs = ndollars * (PF.numtasks - 1);
02531         VectorReserve(dollar_slave_bufs, nbufs);
02532         for ( i = VectorSize(dollar_slave_bufs); i < nbufs; i++ ) {
02533             VectorInit(VectorPtr(dollar_slave_bufs)[i].buf);
02534         }
02535         VectorSize(dollar_slave_bufs) = nbufs;
02536         /* Receive data from each slave. */
02537         for ( nslaves = 1; nslaves < PF.numtasks; nslaves++ ) {
02538             int src;
02539             PF_LongSingleReceive(PF_ANY_SOURCE, PF_DOLLAR_MSGTAG, &src, NULL);
02540             nvars = 0;
02541             for ( i = 0; i < NumPotModdollars; i++ ) {
02542                 WORD index = PotModdollars[i];
02543                 dollar_buf *b;
02544                 if ( !dollar_to_be_collected(index) ) continue;
02545                 b = &VectorPtr(dollar_slave_bufs)[(PF.numtasks - 1) * nvars + (src - 1)];
02546                 PF_LongSingleUnpack(&b->type, 1, PF_WORD);
02547                 if ( b->type != DOLZERO ) {
02548                     LONG size;
02549                     WORD *where;
02550                     PF_LongSingleUnpack(&size, 1, PF_LONG);
02551                     VectorReserve(b->buf, size + 1);
02552                     where = VectorPtr(b->buf);
02553                     PF_LongSingleUnpack(where, size, PF_WORD);
02554                     where[size] = 0; /* The null terminator is needed. */
02555                     b->size = size + 1; /* Including the null terminator. */
02556                     /* Note that we don't collect factored stuff for max/min/sum variables. */
02557                 }
02558                 else {
02559                     VectorReserve(b->buf, 1);
02560                     VectorPtr(b->buf)[0] = 0;
02561                     b->size = 0;
02562                 }
02563                 nvars++;
02564             }
02565         }
02566         /*
02567         * Combine received dollars. The FORM reference manual says maximum/minimum/sum
02568         * $-variables must have a numerical value, however, this routine should work also
02569         * for non-numerical cases, although the maximum/minimum value for non-numerical
02570         * terms has ambiguity.
02571         */
02572         nvars = 0;
02573         for ( i = 0; i < NumPotModdollars; i++ ) {
02574             WORD index = PotModdollars[i];
02575             WORD dtype;
02576             DOLLARS d;
02577             dollar_buf *b;
02578             if ( !dollar_to_be_collected(index) ) continue;
02579             d = Dollars + index;
02580             b = &VectorPtr(dollar_slave_bufs)[(PF.numtasks - 1) * nvars];
02581             dtype = dollar_mod_type(index);
02582             switch ( dtype ) {
02583                 case MODMAX:
02584                 case MODMIN: {
02585                     /*
02586                     # [ MODMAX & MODMIN :
02587                     */
02588                     int selected = 0;
02589                     for ( j = 1; j < PF.numtasks - 1; j++ ) {
02590                         int c = compare_two_expressions(VectorPtr(b[j].buf),
02591                             VectorPtr(b[selected].buf));
02592                         if ( (dtype == MODMAX && c > 0) || (dtype == MODMIN && c < 0) )
02593                             selected = j;
02594                         b = b + selected;
02595                         copy_dollar(index, b->type, VectorPtr(b->buf), b->size);
02596                     }
02597                     /*
02598                     # [ MODMAX & MODMIN :
02599                     */
02600                     break;
02601                 }
02602                 case MODSUM: {
02603                     /*
02604                     # [ MODSUM :
02605                     */
02605                     GETIDENTITY

```

```

02606         int err = 0;
02607
02608         CBUF *C = cbuf + AM.rbufnum;
02609         WORD *oldwork = AT.WorkPointer, *oldcterm = AN.cTerm;
02610         WORD olddefer = AR.DeferFlag, oldnumlhs = AR.Cnumlhs, oldnumrhs = C->numrhs;
02611
02612         LONG size;
02613         WORD type, *dbuf;
02614
02615         AN.cTerm = 0;
02616         AR.DeferFlag = 0;
02617
02618         if ( ((WORD *) ((UBYTE *) AT.WorkPointer + AM.MaxTer)) > AT.WorkTop ) {
02619             err = -1;
02620             goto cleanup;
02621             MesWork();
02622         }
02623
02624         if ( NewSort(BHEAD0) ) {
02625             err = -1;
02626             goto cleanup;
02627         }
02628         if ( NewSort(BHEAD0) ) {
02629             LowerSortLevel();
02630             err = -1;
02631             goto cleanup;
02632         }
02633
02634         /*
02635          * Sum up the original $-variable in the master and $-variables on all slaves.
02636          * Note that $-variables on the slaves are set to zero at the beginning of
02637          * the module (See also DoExecute()).
02638          */
02639         for ( j = 0; j < PF.numtasks; j++ ) {
02640             const WORD *r;
02641             for ( r = j == 0 ? Dollars[index].where : VectorPtr(b[j - 1].buf); *r; r += *r
02642         ) {
02643             WCOPY(AT.WorkPointer, r, *r);
02644             AT.WorkPointer += *r;
02645             AR.Cnumlhs = 0;
02646             if ( Generator(BHEAD oldwork, 0) ) {
02647                 LowerSortLevel(); LowerSortLevel();
02648                 err = -1;
02649                 goto cleanup;
02650             }
02651             AT.WorkPointer = oldwork;
02652         }
02653
02654         size = EndSort(BHEAD (WORD *) &dbuf, 2);
02655         if ( size < 0 ) {
02656             LowerSortLevel();
02657             err = -1;
02658             goto cleanup;
02659         }
02660         LowerSortLevel();
02661
02662         /* Find special cases. */
02663         type = DOLTERMS;
02664         if ( dbuf[0] == 0 ) {
02665             type = DOLZERO;
02666         }
02667         else if ( dbuf[dbuf[0]] == 0 ) {
02668             const WORD *t = dbuf, *w;
02669             WORD n, nsize;
02670             n = *t;
02671             nsize = t[n - 1];
02672             if ( nsize < 0 ) nsize = -nsize;
02673             if ( nsize == n - 1 ) {
02674                 nsize = (nsize - 1) / 2;
02675                 w = t + 1 + nsize;
02676                 if ( *w == 1 ) {
02677                     w++; while ( w < t + n - 1 ) { if ( *w ) break; w++; }
02678                     if ( w == t + n - 1 ) type = DOLNUMBER;
02679                 }
02680                 else if ( n == 7 && t[6] == 3 && t[5] == 1 && t[4] == 1 && t[1] == INDEX
&& t[2] == 3 ) {
02681                     type = DOLINDEX;
02682                     d->index = t[3];
02683                 }
02684             }
02685         }
02686         copy_dollar(index, type, dbuf, dollarlen(dbuf) + 1);
02687         M_free(dbuf, "temporary dollar buffer");
02688     cleanup:
02689         AR.Cnumlhs = oldnumlhs;
02690         C->numrhs = oldnumrhs;

```

```

02691         AR.DeferFlag = olddefer;
02692         AN.cTerm = oldcterm;
02693         AT.WorkPointer = oldwork;
02694
02695         if ( err ) return err;
02696 /*
02697     #] MODSUM :
02698 */
02699         break;
02700     }
02701 }
02702 if ( d->type == DOLTERMS )
02703     cbuf[AM.dbufnum].CanCommu[index] = numcommute(d->where,
02704 &cbuf[AM.dbufnum].NumTerms[index]);
02705 cbuf[AM.dbufnum].rhs[index] = d->where;
02706 nvars++;
02707 #ifdef PF_DEBUG_REDUCE_DOLLAR
02708     MesPrint("< Reduce $-var: %s", AC.dollarnames->namebuffer + d->name);
02709 #endif
02710 }
02711 /*
02712     #] Master :
02713 */
02714 }
02715 else {
02716 /*
02717     #[ Slave :
02718 */
02719     PF_PrepareLongSinglePack();
02720     /* Pack each variable. */
02721     for ( i = 0; i < NumPotModdollars; i++ ) {
02722         WORD index = PotModdollars[i];
02723         DOLLARS d;
02724         if ( !dollar_to_be_collected(index) ) continue;
02725         d = Dollars + index;
02726         PF_LongSinglePack(&d->type, 1, PF_WORD);
02727         if ( d->type != DOLZERO ) {
02728             /*
02729              * NOTE: d->size is the allocated buffer size for d->where in WORDs.
02730              *       So dollarlen(d->where) can be < d->size-1. (TU 15 Dec 2011)
02731              */
02732             LONG size = dollarlen(d->where);
02733             PF_LongSinglePack(&size, 1, PF_LONG);
02734             PF_LongSinglePack(d->where, size, PF_WORD);
02735             /* Note that we don't collect factored stuff for max/min/sum variables. */
02736         }
02737     }
02738     PF_LongSingleSend(MASTER, PF_DOLLAR_MSGTAG);
02739 /*
02740     #[ Slave :
02741 */
02742 }
02743 return 0;
02744 }
02745 /*
02746     #] PF_CollectModifiedDollars :
02747     #[ PF_BroadcastModifiedDollars :
02748 */
02749
02750 /*
02751     #[ dollar_to_be_broadcast :
02752 */
02753
02754 static inline int dollar_to_be_broadcast(WORD index)
02755 {
02756     switch ( dollar_mod_type(index) ) {
02757     case MODLOCAL:
02758         return 0;
02759     default:
02760         return 1;
02761     }
02762 }
02763
02764 /*
02765     #] dollar_to_be_broadcast :
02766 */
02767
02768 #] PF_BroadcastModifiedDollars(void)
02769 {
02770     int i, j, ndollars;
02771     /*
02772      * Count the number of (potentially) modified dollar variables, which we need to broadcast.
02773      * Here we need to broadcast all non-local variables.
02774      */
02775     ndollars = 0;
02776     for ( i = 0; i < NumPotModdollars; i++ ) {

```

```

02793     WORD index = PotModdollars[i];
02794     if ( dollar_to_be_broadcast(index) ) ndollars++;
02795 }
02796 if ( ndollars == 0 ) return 0; /* No dollars to be broadcast. */
02797
02798 if ( PF.me == MASTER ) {
02799 /*
02800     #[] Master :
02801 */
02802     PF_PrepareLongMultiPack();
02803     /* Pack each variable. */
02804     for ( i = 0; i < NumPotModdollars; i++ ) {
02805         WORD index = PotModdollars[i];
02806         DOLLARS d;
02807         if ( !dollar_to_be_broadcast(index) ) continue;
02808         d = Dollars + index;
02809         PF_LongMultiPack(&d->type, 1, PF_WORD);
02810         if ( d->type != DOLZERO ) {
02811             /*
02812              * NOTE: d->size is the allocated buffer size for d->where in WORDs.
02813              *       So dollarlen(d->where) can be < d->size-1. (TU 15 Dec 2011)
02814              */
02815             LONG size = dollarlen(d->where);
02816             PF_LongMultiPack(&size, 1, PF_LONG);
02817             PF_LongMultiPack(d->where, size, PF_WORD);
02818             /* ...and the factored stuff. */
02819             PF_LongMultiPack(&d->nfactors, 1, PF_WORD);
02820             if ( d->nfactors > 1 ) {
02821                 for ( j = 0; j < d->nfactors; j++ ) {
02822                     FACDOLLAR *f = &d->factors[j];
02823                     PF_LongMultiPack(&f->type, 1, PF_WORD);
02824                     PF_LongMultiPack(&f->size, 1, PF_LONG);
02825                     if ( f->size > 0 )
02826                         PF_LongMultiPack(f->where, f->size, PF_WORD);
02827                     else
02828                         PF_LongMultiPack(&f->value, 1, PF_WORD);
02829                 }
02830             }
02831         }
02832 #ifdef PF_DEBUG_BCAST_DOLLAR
02833         MesPrint("> Broadcast $-var: %s", AC.dollarname->namebuffer + d->name);
02834 #endif
02835     }
02836 /*
02837     #[] Master :
02838 */
02839 }
02840 if ( PF_LongMultiBroadcast() ) return -1;
02841 if ( PF.me != MASTER ) {
02842 /*
02843     #[] Slave :
02844 */
02845     for ( i = 0; i < NumPotModdollars; i++ ) {
02846         WORD index = PotModdollars[i];
02847         DOLLARS d;
02848         if ( !dollar_to_be_broadcast(index) ) continue;
02849         d = Dollars + index;
02850         /* Clear the contents of the dollar variable. */
02851         if ( d->where && d->where != &AM.dollarzero )
02852             M_free(d->where, "old content of dollar");
02853         d->where = &AM.dollarzero;
02854         d->size = 0;
02855         CleanDollarFactors(d);
02856         /* Unpack and store the contents. */
02857         PF_LongMultiUnpack(&d->type, 1, PF_WORD);
02858         if ( d->type != DOLZERO ) {
02859             LONG size;
02860             PF_LongMultiUnpack(&size, 1, PF_LONG);
02861             d->size = size + 1;
02862             d->where = (WORD *)Malloca(sizeof(WORD) * d->size, "dollar content");
02863             PF_LongMultiUnpack(d->where, size, PF_WORD);
02864             d->where[size] = 0; /* The null terminator is needed. */
02865             /* ...and the factored stuff. */
02866             PF_LongMultiUnpack(&d->nfactors, 1, PF_WORD);
02867             if ( d->nfactors > 1 ) {
02868                 d->factors = (FACDOLLAR *)Malloca(sizeof(FACDOLLAR) * d->nfactors, "dollar
factored stuff");
02869                 for ( j = 0; j < d->nfactors; j++ ) {
02870                     FACDOLLAR *f = &d->factors[j];
02871                     PF_LongMultiUnpack(&f->type, 1, PF_WORD);
02872                     PF_LongMultiUnpack(&f->size, 1, PF_LONG);
02873                     if ( f->size > 0 ) {
02874                         f->where = (WORD *)Malloca(sizeof(WORD) * (f->size + 1), "dollar factor
content");
02875                         PF_LongMultiUnpack(f->where, f->size, PF_WORD);
02876                         f->where[f->size] = 0; /* The null terminator is needed. */
02877                         f->value = 0;

```



```

02878     }
02879     else {
02880         f->where = NULL;
02881         PF_LongMultiUnpack(&f->value, 1, PF_WORD);
02882     }
02883 }
02884 }
02885 }
02886 if ( d->type == DOLTERMS )
02887     cbuf[AM.dbufnum].CanCommu[index] = numcommute(d->where,
02888 &cbuf[AM.dbufnum].NumTerms[index]);
02889     cbuf[AM.dbufnum].rhs[index] = d->where;
02890 }
02891 /*
02892     #] Slave :
02893 */
02894 }
02895 return 0;
02896 }
02897 /*
02898     #] PF_BroadcastModifiedDollars :
02899     #] Synchronization of modified dollar variables :
02900     #[ Synchronization of redefined preprocessor variables :
02901     #[ Variables :
02902 */
02903
02904 /* A buffer used in receivers. */
02905 static Vector(UBYTE, prevarbuf);
02906
02907 /*
02908     #] Variables :
02909     #[ PF_PackRedefinedPreVars :
02910 */
02911
02912 static void PF_PackRedefinedPreVars(void)
02913 {
02914     int i;
02915     /* First, pack the number of redefined preprocessor variables. */
02916     int nredefs = 0;
02917     for ( i = 0; i < AC.numpfirstnum; i++ )
02918         if ( AC.inputnumbers[i] >= 0 ) nredefs++;
02919     PF_LongSinglePack(&nredefs, 1, PF_INT);
02920     /* Then, pack each variable. */
02921     for ( i = 0; i < AC.numpfirstnum; i++ )
02922         if ( AC.inputnumbers[i] >= 0 ) {
02923             WORD index = AC.pfirstnum[i];
02924             UBYTE *value = PreVar[index].value;
02925             int bytes = strlen((char *)value);
02926             PF_LongSinglePack(&index, 1, PF_WORD);
02927             PF_LongSinglePack(&bytes, 1, PF_INT);
02928             PF_LongSinglePack(value, bytes, PF_BYTE);
02929             PF_LongSinglePack(&AC.inputnumbers[i], 1, PF_LONG);
02930         }
02931 }
02932
02933 /*
02934     #] PF_PackRedefinedPreVars :
02935     #[ PF_UnpackRedefinedPreVars :
02936 */
02937
02938 static void PF_UnpackRedefinedPreVars(void)
02939 {
02940     int i, j;
02941     /* Unpack the number of redefined preprocessor variables. */
02942     int nredefs;
02943     PF_LongSingleUnpack(&nredefs, 1, PF_INT);
02944     if ( nredefs > 0 ) {
02945         /* Then unpack each variable. */
02946         for ( i = 0; i < nredefs; i++ ) {
02947             WORD index;
02948             int bytes;
02949             UBYTE *value;
02950             LONG inputnumber;
02951             PF_LongSingleUnpack(&index, 1, PF_WORD);
02952             PF_LongSingleUnpack(&bytes, 1, PF_INT);
02953             VectorReserve(prevarbuf, bytes + 1);
02954             value = VectorPtr(prevarbuf);
02955             PF_LongSingleUnpack(value, bytes, PF_BYTE);
02956             value[bytes] = '\0'; /* The null terminator is needed. */
02957             PF_LongSingleUnpack(&inputnumber, 1, PF_LONG);
02958             /* Put this variable if it must be updated. */
02959             for ( j = 0; j < AC.numpfirstnum; j++ )
02960                 if ( AC.pfirstnum[j] == index ) break;
02961             if ( AC.inputnumbers[j] < inputnumber ) {
02962                 AC.inputnumbers[j] = inputnumber;
02963                 PutPreVar(PreVar[index].name, value, NULL, 1);
02964             }
02965         }
02966     }
02967 }

```

```

02981     }
02982     }
02983 }
02984 }
02985
02986 /*
02987     #] PF_UnpackRedefinedPreVars :
02988     #[ PF_BroadcastRedefinedPreVars :
02989 */
02990
03001 int PF_BroadcastRedefinedPreVars(void)
03002 {
03003     /*
03004     * NOTE: Because the compilation is performed on the all processes
03005     * independently on AC.mparallelfalg, we always have to broadcast redefined
03006     * preprocessor variables from the master to the all slaves.
03007     */
03008     if ( PF.me == MASTER ) {
03009     /*
03010         #[ Master :
03011     */
03012         int i, nredefs;
03013         PF_PrepareLongMultiPack();
03014         /* First, pack the number of redefined preprocessor variables. */
03015         nredefs = 0;
03016         for ( i = 0; i < AC.numpfirstnum; i++ )
03017             if ( AC.inputnumbers[i] >= 0 ) nredefs++;
03018         PF_LongMultiPack(&nredefs, 1, PF_INT);
03019         /* Then, pack each variable. */
03020         for ( i = 0; i < AC.numpfirstnum; i++ )
03021             if ( AC.inputnumbers[i] >= 0 ) {
03022                 WORD index = AC.pfirstnum[i];
03023                 UBYTE *value = PreVar[index].value;
03024                 int bytes = strlen((char *)value);
03025                 PF_LongMultiPack(&index, 1, PF_WORD);
03026                 PF_LongMultiPack(&bytes, 1, PF_INT);
03027                 PF_LongMultiPack(value, bytes, PF_BYTE);
03028 #ifdef PF_DEBUG_BCAST_PREVAR
03029                 MesPrint(" Broadcast PreVar: %s = \"%s\"", PreVar[index].name, value);
03030 #endif
03031             }
03032     /*
03033         #] Master :
03034     */
03035     }
03036     if ( PF_LongMultiBroadcast() ) return -1;
03037     if ( PF.me != MASTER ) {
03038     /*
03039         #[ Slave :
03040     */
03041         int i, nredefs;
03042         /* Unpack the number of redefined preprocessor variables. */
03043         PF_LongMultiUnpack(&nredefs, 1, PF_INT);
03044         if ( nredefs > 0 ) {
03045             /* Then unpack each variable and put it. */
03046             for ( i = 0; i < nredefs; i++ ) {
03047                 WORD index;
03048                 int bytes;
03049                 UBYTE *value;
03050                 PF_LongMultiUnpack(&index, 1, PF_WORD);
03051                 PF_LongMultiUnpack(&bytes, 1, PF_INT);
03052                 VectorReserve(prevarbuf, bytes + 1);
03053                 value = VectorPtr(prevarbuf);
03054                 PF_LongMultiUnpack(value, bytes, PF_BYTE);
03055                 value[bytes] = '\0'; /* The null terminator is needed. */
03056                 PutPreVar(PreVar[index].name, value, NULL, 1);
03057             }
03058         }
03059     /*
03060         #] Slave :
03061     */
03062     }
03063     return 0;
03064 }
03065
03066 /*
03067     #] PF_BroadcastRedefinedPreVars :
03068     #] Synchronization of redefined preprocessor variables :
03069     #[ Preprocessor Inside instruction :
03070     #[ Variables :
03071 */
03072
03073 /* Saved values of AC.RhsExprInModuleFlag, PotModdollars and AC.pfirstnum. */
03074 static WORD oldRhsExprInModuleFlag;
03075 static Vector(WORD, oldPotModdollars);
03076 static Vector(WORD, oldpfirstnum);
03077

```

```

03078 /*
03079     #] Variables :
03080     #[ PF_StoreInsideInfo :
03081 */
03082
03083 /*
03084  * Saves the current values of AC.RhsExprInModuleFlag, PotModdollars
03085  * and AC.pfirstnum.
03086  *
03087  * Called by DoInside().
03088  *
03089  * @return 0 if OK, nonzero on error.
03090  */
03091 int PF_StoreInsideInfo(void)
03092 {
03093     int i;
03094     oldRhsExprInModuleFlag = AC.RhsExprInModuleFlag;
03095     VectorClear(oldPotModdollars);
03096     for ( i = 0; i < NumPotModdollars; i++ )
03097         VectorPushBack(oldPotModdollars, PotModdollars[i]);
03098     VectorClear(oldpfirstnum);
03099     for ( i = 0; i < AC.numpfirstnum; i++ )
03100         VectorPushBack(oldpfirstnum, AC.pfirstnum[i]);
03101     return 0;
03102 }
03103
03104 /*
03105     #] PF_StoreInsideInfo :
03106     #[ PF_RestoreInsideInfo :
03107 */
03108
03109 /*
03110  * Restores the saved values of AC.RhsExprInModuleFlag, PotModdollars
03111  * and AC.pfirstnum.
03112  *
03113  * Called by DoEndInside().
03114  *
03115  * @return 0 if OK, nonzero on error.
03116  */
03117 int PF_RestoreInsideInfo(void)
03118 {
03119     int i;
03120     AC.RhsExprInModuleFlag = oldRhsExprInModuleFlag;
03121     NumPotModdollars = VectorSize(oldPotModdollars);
03122     for ( i = 0; i < NumPotModdollars; i++ )
03123         PotModdollars[i] = VectorPtr(oldPotModdollars)[i];
03124     AC.numpfirstnum = VectorSize(oldpfirstnum);
03125     for ( i = 0; i < AC.numpfirstnum; i++ )
03126         AC.pfirstnum[i] = VectorPtr(oldpfirstnum)[i];
03127     return 0;
03128 }
03129
03130 /*
03131     #] PF_RestoreInsideInfo :
03132     #] Preprocessor Inside instruction :
03133     #[ PF_BroadcastCBuf :
03134 */
03135
03136 int PF_BroadcastCBuf(int bufnum)
03137 {
03138     CBUF *C = cbuf + bufnum;
03139     int i;
03140     LONG l;
03141     if ( PF.me == MASTER ) {
03142         /*
03143             #] Master :
03144             PF_PrepareLongMultiPack();
03145             /* Pack CBUF struct except pointers. */
03146             PF_LongMultiPack(&C->BufferSize, 1, PF_LONG);
03147             PF_LongMultiPack(&C->numlhs, 1, PF_INT);
03148             PF_LongMultiPack(&C->numrhs, 1, PF_INT);
03149             PF_LongMultiPack(&C->maxlhs, 1, PF_INT);
03150             PF_LongMultiPack(&C->maxrhs, 1, PF_INT);
03151             PF_LongMultiPack(&C->mnumlhs, 1, PF_INT);
03152             PF_LongMultiPack(&C->mnumrhs, 1, PF_INT);
03153             PF_LongMultiPack(&C->numtree, 1, PF_INT);
03154             PF_LongMultiPack(&C->rootnum, 1, PF_INT);
03155             PF_LongMultiPack(&C->MaxTreeSize, 1, PF_INT);
03156             /* Now pointers. Pointer, lhs and rhs are packed as offsets. We don't pack Top. */
03157             l = C->Pointer - C->Buffer;
03158             PF_LongMultiPack(&l, 1, PF_LONG);
03159             PF_LongMultiPack(C->Buffer, 1, PF_WORD);
03160             for ( i = 0; i < C->numlhs + 1; i++ ) {
03161                 l = C->lhs[i] - C->Buffer;
03162                 PF_LongMultiPack(&l, 1, PF_LONG);
03163             }
03164         }
03165     }

```

```

03172         for ( i = 0; i < C->numrhs + 1; i++ ) {
03173             l = C->rhs[i] - C->Buffer;
03174             PF_LongMultiPack(&l, 1, PF_LONG);
03175         }
03176         PF_LongMultiPack(C->CanCommu, C->numrhs + 1, PF_LONG);
03177         PF_LongMultiPack(C->NumTerms, C->numrhs + 1, PF_LONG);
03178         PF_LongMultiPack(C->numdum, C->numrhs + 1, PF_WORD);
03179         PF_LongMultiPack(C->dimension, C->numrhs + 1, PF_WORD);
03180         if ( C->MaxTreeSize > 0 )
03181             PF_LongMultiPack(C->boomlijst, (C->numtree + 1) * (sizeof(COMPTREE) / sizeof(int)),
PF_INT);
03182 #ifdef PF_DEBUG_BCAST_CBUF
03183     MesPrint("> Broadcast CBuf %d", bufnum);
03184 #endif
03185 /*
03186     #] Master :
03187 */
03188     }
03189     if ( PF_LongMultiBroadcast() ) return -1;
03190     if ( PF.me != MASTER ) {
03191 /*
03192     #[ Slave :
03193 */
03194         /* First, free already allocated buffers. */
03195         finishcbuf(bufnum);
03196         /* Unpack CBUF struct except pointers. */
03197         PF_LongMultiUnpack(&C->BufferSize, 1, PF_LONG);
03198         PF_LongMultiUnpack(&C->numlhs, 1, PF_INT);
03199         PF_LongMultiUnpack(&C->numrhs, 1, PF_INT);
03200         PF_LongMultiUnpack(&C->maxlhs, 1, PF_INT);
03201         PF_LongMultiUnpack(&C->maxrhs, 1, PF_INT);
03202         PF_LongMultiUnpack(&C->mnumlhs, 1, PF_INT);
03203         PF_LongMultiUnpack(&C->mnumrhs, 1, PF_INT);
03204         PF_LongMultiUnpack(&C->numtree, 1, PF_INT);
03205         PF_LongMultiUnpack(&C->rootnum, 1, PF_INT);
03206         PF_LongMultiUnpack(&C->MaxTreeSize, 1, PF_INT);
03207         /* Allocate new buffers. */
03208         C->Buffer = (WORD *)Malloca1(C->BufferSize * sizeof(WORD), "compiler buffer");
03209         C->Top = C->Buffer + C->BufferSize;
03210         C->lhs = (WORD **)Malloca1(C->maxlhs * sizeof(WORD *), "compiler buffer");
03211         C->rhs = (WORD **)Malloca1(C->maxrhs * (sizeof(WORD *) + 2 * sizeof(LONG) + 2 * sizeof(WORD)),
"compiler buffer");
03212         C->CanCommu = (LONG *) (C->rhs + C->maxrhs);
03213         C->NumTerms = C->CanCommu + C->maxrhs;
03214         C->numdum = (WORD *) (C->NumTerms + C->maxrhs);
03215         C->dimension = C->numdum + C->maxrhs;
03216         if ( C->MaxTreeSize > 0 )
03217             C->boomlijst = (COMPTREE *)Malloca1(C->MaxTreeSize * sizeof(COMPTREE), "compiler buffer");
03218         /* Unpack buffers. */
03219         PF_LongMultiUnpack(&l, 1, PF_LONG);
03220         PF_LongMultiUnpack(C->Buffer, 1, PF_WORD);
03221         C->Pointer = C->Buffer + 1;
03222         for ( i = 0; i < C->numlhs + 1; i++ ) {
03223             PF_LongMultiUnpack(&l, 1, PF_LONG);
03224             C->lhs[i] = C->Buffer + l;
03225         }
03226         for ( i = 0; i < C->numrhs + 1; i++ ) {
03227             PF_LongMultiUnpack(&l, 1, PF_LONG);
03228             C->rhs[i] = C->Buffer + l;
03229         }
03230         PF_LongMultiUnpack(C->CanCommu, C->numrhs + 1, PF_LONG);
03231         PF_LongMultiUnpack(C->NumTerms, C->numrhs + 1, PF_LONG);
03232         PF_LongMultiUnpack(C->numdum, C->numrhs + 1, PF_WORD);
03233         PF_LongMultiUnpack(C->dimension, C->numrhs + 1, PF_WORD);
03234         if ( C->MaxTreeSize > 0 )
03235             PF_LongMultiUnpack(C->boomlijst, (C->numtree + 1) * (sizeof(COMPTREE) / sizeof(int)),
PF_INT);
03236 /*
03237     #] Slave :
03238 */
03239     }
03240     return 0;
03241 }
03242
03243 /*
03244 #] PF_BroadcastCBuf :
03245 #[ PF_BroadcastExpFlags :
03246 */
03247
03254 int PF_BroadcastExpFlags(void)
03255 {
03256     WORD i;
03257     EXPRESSIONS e;
03258     if ( PF.me == MASTER ) {
03259 /*
03260     #] Master :
03261 */

```

```

03262     PF_PrepareLongMultiPack();
03263     PF_LongMultiPack(&AR.expflags, 1, PF_WORD);
03264     for ( i = 0; i < NumExpressions; i++ ) {
03265         e = &Expressions[i];
03266         PF_LongMultiPack(&e->counter, 1, PF_WORD);
03267         PF_LongMultiPack(&e->vflags, 1, PF_WORD);
03268         PF_LongMultiPack(&e->uflags, 1, PF_WORD);
03269         PF_LongMultiPack(&e->numdummies, 1, PF_WORD);
03270         PF_LongMultiPack(&e->numfactors, 1, PF_WORD);
03271 #ifdef PF_DEBUG_BCAST_EXPRFLAGS
03272         MesPrint("» Broadcast ExprFlags: %s", AC.exprnames->namebuffer + e->name);
03273 #endif
03274     }
03275     /*
03276     #] Master :
03277     */
03278 }
03279 if ( PF_LongMultiBroadcast() ) return -1;
03280 if ( PF.me != MASTER ) {
03281     /*
03282     #[ Slave :
03283     */
03284     PF_LongMultiUnpack(&AR.expflags, 1, PF_WORD);
03285     for ( i = 0; i < NumExpressions; i++ ) {
03286         e = &Expressions[i];
03287         PF_LongMultiUnpack(&e->counter, 1, PF_WORD);
03288         PF_LongMultiUnpack(&e->vflags, 1, PF_WORD);
03289         PF_LongMultiUnpack(&e->uflags, 1, PF_WORD);
03290         PF_LongMultiUnpack(&e->numdummies, 1, PF_WORD);
03291         PF_LongMultiUnpack(&e->numfactors, 1, PF_WORD);
03292     }
03293     /*
03294     #] Slave :
03295     */
03296 }
03297 return 0;
03298 }
03299
03300 /*
03301 #] PF_BroadcastExpFlags :
03302 #[ PF_SetScratch :
03303 */
03304
03311 static void PF_SetScratch(FILEHANDLE *f, POSITION *position)
03312 {
03313     if(
03314         ( f->handle >= 0) && ISGEPOS(*position, f->POposition) &&
03315         ( ISGEPOSINC(*position, f->POposition, (f->POfull-f->PObuffer)*sizeof(WORD)) ==0 )
03316     ) /*position is inside the buffer! SetScratch() will do nothing.*/
03317         f->POfull=f->PObuffer; /*force SetScratch() to re-read the position from the beginning:*/
03318     SetScratch(f, position);
03319 }
03320
03321 /*
03322 #] PF_SetScratch :
03323 #[ PF_pushScratch :
03324 */
03325
03332 static int PF_pushScratch(FILEHANDLE *f)
03333 {
03334     LONG size, RetCode;
03335     if ( f->handle < 0 ) {
03336         /*Create the file*/
03337         if ( ( RetCode = CreateFile(f->name) ) >= 0 ) {
03338             f->handle = (WORD)RetCode;
03339             PUTZERO(f->filesize);
03340             PUTZERO(f->POposition);
03341         }
03342         else{
03343             MesPrint("Cannot create scratch file %s", f->name);
03344             return(-1);
03345         }
03346     } /*if ( f->handle < 0)*/
03347     size = (f->POfill-f->PObuffer)*sizeof(WORD);
03348     if( size > 0 ) {
03349         SeekFile(f->handle, &(f->POposition), SEEK_SET);
03350         if ( WriteFile(f->handle, (UBYTE *) (f->PObuffer), size) != size ) {
03351             MesPrint("Error while writing to disk. Disk full?");
03352             return(-1);
03353         }
03354         ADDPOS(f->filesize, size);
03355         ADDPOS(f->POposition, size);
03356         f->POfill = f->POfull=f->PObuffer;
03357     } /*if( size > 0)*/
03358     return(0);
03359 }
03360

```

```

03361 /*
03362 #] PF_pushScratch :
03363 #[ Broadcasting RHS expressions :
03364 #] PF_WalkThroughExprMaster :
03365 Returns <=0 if the expression is ready, or dl+1;
03366 */
03367
03368 static int PF_WalkThroughExprMaster(FILEHANDLE *curfile, int dl)
03369 {
03370     LONG l=0;
03371     for(;;){
03372         if(curfile->POfull-curfile->POfill < dl){
03373             POSITION pos;
03374             SeekScratch(curfile,&pos);
03375             PF_SetScratch(curfile,&pos);
03376         }/*if(curfile->POfull-curfile->POfill < dl)*/
03377         curfile->POfill+=dl;
03378         l+=dl;
03379         if( l >= PF.exprbufsize){
03380             if( l == PF.exprbufsize){
03381                 if( *(curfile->POfill) == 0)/*expression is ready*/
03382                     return(0);
03383             }
03384             l-=PF.exprbufsize;
03385             curfile->POfill-=l;
03386             return l+1;
03387         }
03388
03389         dl=(curfile->POfill);
03390         if(dl == 0)
03391             return l-PF.exprbufsize;
03392
03393         if(dl<0){/*compressed term*/
03394             if(curfile->POfull-curfile->POfill < 1){
03395                 POSITION pos;
03396                 SeekScratch(curfile,&pos);
03397                 PF_SetScratch(curfile,&pos);
03398             }/*if(curfile->POfull-curfile->POfill < 1)*/
03399             dl=(curfile->POfill+1)+2;
03400         }/*if(*(curfile->POfill)<0)*/
03401     }/*for(;;)*/
03402 }
03403
03404 /*
03405 #] PF_WalkThroughExprMaster :
03406 #] PF_WalkThroughExprSlave :
03407 Returns <=0 if the expression is ready, or dl+1;
03408 */
03409
03410 static int PF_WalkThroughExprSlave(FILEHANDLE *curfile, LONG *counter, int dl)
03411 {
03412     LONG l=0;
03413     for(;;){
03414         if(curfile->POstop-curfile->POfill < dl){
03415             if(PF_pushScratch(curfile))
03416                 return(-PF.exprbufsize-1);
03417         }
03418         curfile->POfill+=dl;
03419         curfile->POfull=curfile->POfill;
03420         l+=dl;
03421         if( l >= PF.exprbufsize){
03422             if( l == PF.exprbufsize){
03423                 /*
03424                  * This access is valid because PF.exprbufsize+1 WORDs are
03425                  * broadcasted, this shortcut is not mandatory though. (TU 15 Sep 2011)
03426                  */
03427                 if( *(curfile->POfill) == 0)/*expression is ready*/
03428                     return(0);
03429             }
03430             l-=PF.exprbufsize;
03431             curfile->POfill-=l;
03432             curfile->POfull=curfile->POfill;
03433             return l+1;
03434         }
03435
03436         dl=(curfile->POfill);
03437         if(dl == 0)
03438             return l-PF.exprbufsize;
03439         (*counter)++;
03440         if(dl<0){/*compressed term*/
03441             if(curfile->POstop-curfile->POfill < 1){
03442                 if(PF_pushScratch(curfile))
03443                     return(-PF.exprbufsize-1);
03444             }
03445             /*
03446              * This access is always valid because PF.exprbufsize+1 WORDs are
03447              * broadcasted. (TU 15 Sep 2011)

```

```

03448         */
03449         dl=*(curfile->POfill+1)+2;
03450     }/*if (*(curfile->POfill)<0)*/
03451 }/*for(;;)*/
03452 }
03453
03454 /*
03455     #] PF_WalkThroughExprSlave :
03456     #[ PF_rhsBCastMaster :
03457 */
03458
03466 static int PF_rhsBCastMaster(FILEHANDLE *curfile, EXPRESSIONS e)
03467 {
03468     LONG l=1; /*PF_WalkThroughExpr returns length + 1*/
03469     SetScratch(curfile, &(e->onfile));
03470     do{
03471         /*
03472          * We need to broadcast PF.exprbufsize+1 WORDs because PF_WalkThroughExprSlave
03473          * may access to an additional 1 WORD. It is better to rewrite the routines
03474          * in such a way as to broadcast only PF.exprbufsize WORDs. (TU 15 Sep 2011)
03475          */
03476         if ( curfile->POfull - curfile->POfill < PF.exprbufsize + 1 ) {
03477             POSITION pos;
03478             SeekScratch(curfile, &pos);
03479             PF_SetScratch(curfile, &pos);
03480         }
03481         if ( PF_Bcast(curfile->POfill, (PF.exprbufsize + 1) * sizeof(WORD)) )
03482             return -1;
03483         l=PF_WalkThroughExprMaster(curfile, l-1);
03484     }while(l>0);
03485     if(l<0)/*The tail is extra, decrease POfill*/
03486         curfile->POfill-=l;
03487     return(0);
03488 }
03489
03490 /*
03491     #] PF_rhsBCastMaster :
03492     #[ PF_rhsBCastSlave :
03493 */
03494
03503 static int PF_rhsBCastSlave(FILEHANDLE *curfile, EXPRESSIONS e)
03504 {
03505     LONG l=1; /*PF_WalkThroughExpr returns length + 1*/
03506     LONG counter = 0;
03507     do{
03508         /*
03509          * We need to broadcast PF.exprbufsize+1 WORDs because PF_WalkThroughExprSlave
03510          * may access to an additional 1 WORD. It is better to rewrite the routines
03511          * in such a way as to broadcast only PF.exprbufsize WORDs. (TU 15 Sep 2011)
03512          */
03513         if ( curfile->POstop - curfile->POfill < PF.exprbufsize + 1 ) {
03514             if(PF_pushScratch(curfile))
03515                 return(-1);
03516         }
03517         if ( PF_Bcast(curfile->POfill, (PF.exprbufsize + 1) * sizeof(WORD)) )
03518             return(-1);
03519         l = PF_WalkThroughExprSlave(curfile, &counter, l - 1);
03520     }while(l>0);
03521     if(l<0){/*The tail is extra, decrease POfill*/
03522         if(l<-PF.exprbufsize)/*error due to a PF_pushScratch() failure */
03523             return(-1);
03524         curfile->POfill-=l;
03525     }
03526     if ( curfile->handle >= 0 ) {
03527         if ( PF_pushScratch(curfile) ) return -1;
03528     }
03529     curfile->POfull=curfile->POfill;
03530     if ( curfile != AR.hidefile ) AR.InInBuf = curfile->POfull-curfile->PObuffer;
03531     else AR.InHiBuf = curfile->POfull-curfile->PObuffer;
03532     CHECK(counter == e->counter + 1); /* The first term is the prototype. */
03533     return(0);
03534 }
03535
03536 /*
03537     #] PF_rhsBCastSlave :
03538     #[ PF_BroadcastExpr :
03539 */
03540
03548 int PF_BroadcastExpr(EXPRESSIONS e, FILEHANDLE *file)
03549 {
03550     if ( PF.me == MASTER ) {
03551         if ( PF_rhsBCastMaster(file, e) ) return -1;
03552     #ifdef PF_DEBUG_BCAST_RHSEXPR
03553         MesPrint("> Broadcast RhsExpr: %s", AC.exprnames->namebuffer + e->name);
03554     #endif
03555     }
03556     else {

```

```

03557     POSITION pos;
03558     SetEndHScratch(file, &pos);
03559     e->onfile = pos;
03560     if ( PF_rhsBCastSlave(file, e) ) return -1;
03561 }
03562 return 0;
03563 }
03564
03565 /*
03566     #] PF_BroadcastExpr :
03567     #[ PF_BroadcastRHS :
03568 */
03569
03570 int PF_BroadcastRHS(void)
03571 {
03572     int i;
03573     for ( i = 0; i < NumExpressions; i++ ) {
03574         EXPRESSIONS e = &Expressions[i];
03575         if ( !(e->vflags & ISINRHS) ) continue;
03576         switch ( e->status ) {
03577             case LOCALEXPRESSSION:
03578             case SKIPLEXPRESSION:
03579             case DROPLEXPRESSSION:
03580             case GLOBALEXPRESSION:
03581             case SKIPGEXPRESSSION:
03582             case DROPGEXPRESSSION:
03583             case HIDELEXPRESSION:
03584             case HIDEGEXPRESSSION:
03585             case INTOHIDELEXPRESSION:
03586             case INTOHIDEGEXPRESSSION:
03587                 if ( PF_BroadcastExpr(e, AR.infile) ) return -1;
03588                 break;
03589             case HIDDENLEXPRESSION:
03590             case HIDDENGEXPRESSSION:
03591             case DROPHLEXPRESSION:
03592             case DROPHGEXPRESSSION:
03593             case UNHIDELEXPRESSION:
03594             case UNHIDEGEXPRESSSION:
03595                 if ( PF_BroadcastExpr(e, AR.hidefile) ) return -1;
03596                 break;
03597         }
03598     }
03599     if ( PF.me != MASTER )
03600         UpdatePositions();
03601     return 0;
03602 }
03603
03604 /*
03605     #] PF_BroadcastRHS :
03606     #] Broadcasting RHS expressions :
03607     #[ InParallel mode :
03608     #[ PF_InParallelProcessor :
03609 */
03610
03611 int PF_InParallelProcessor(void)
03612 {
03613     GETIDENTITY
03614     int i, next, tag;
03615     EXPRESSIONS e;
03616     /*
03617      * Skip expressions with zero terms. All the master and slaves need to
03618      * change the "partodo" flag.
03619      */
03620     if ( PF.numtasks >= 3 ) {
03621         for ( i = 0; i < NumExpressions; i++ ) {
03622             e = Expressions + i;
03623             if ( e->partodo > 0 && e->counter == 0 ) {
03624                 e->partodo = 0;
03625             }
03626         }
03627     }
03628     if (PF.me == MASTER){
03629         if ( PF.numtasks >= 3 ) {
03630             partodoexr = (WORD*)Malloc1(sizeof(WORD)*(PF.numtasks+1), "PF_InParallelProcessor");
03631             for ( i = 0; i < NumExpressions; i++ ) {
03632                 e = Expressions+i;
03633                 if ( e->partodo <= 0 ) continue;
03634                 switch(e->status){
03635                     case LOCALEXPRESSSION:
03636                     case GLOBALEXPRESSION:
03637                     case UNHIDELEXPRESSION:
03638                     case UNHIDEGEXPRESSSION:
03639                     case INTOHIDELEXPRESSION:
03640                     case INTOHIDEGEXPRESSSION:
03641                         tag=PF_ANY_SOURCE;
03642                         next=PF_Wait4SlaveIP(&tag);
03643                         if(next<0)

```



```

03656         return(-1);
03657     if(tag == PF_DATA_MSGTAG){
03658         PF_Statistics(PF_stats,0);
03659         if(PF_Slave2MasterIP(next))
03660             return(-1);
03661     }
03662     if(PF_Master2SlaveIP(next,e))
03663         return(-1);
03664     partodoexr[next]=i;
03665     break;
03666     default:
03667         e->partodo = 0;
03668         continue;
03669     }/*switch(e->status)*/
03670     }/*for ( i = 0; i < NumExpressions; i++ )*/
03671     /*Here some slaves are working, other are waiting on PF_Send.
03672     Wait all of them.*/
03673     /*At this point no new slaves may be launched so PF_WaitAllSlaves()
03674     does not modify partodoexr[] */
03675     if(PF_WaitAllSlaves())
03676         return(-1);
03677
03678     if ( AC.CollectFun ) AR.DeferFlag = 0;
03679     if(partodoexr){
03680         M_free(partodoexr,"PF_InParallelProcessor");
03681         partodoexr=NULL;
03682     }/*if(partodoexr)*/
03683     }/*if ( PF.numtasks >= 3 ) */
03684     else {
03685         for ( i = 0; i < NumExpressions; i++ ) {
03686             Expressions[i].partodo = 0;
03687         }
03688     }
03689     return(0);
03690 }/*if(PF.me == MASTER)*/
03691 /*Slave:*/
03692 if(PF_Wait4MasterIP(PF_EMPTY_MSGTAG))
03693     return(-1);
03694 /*master is ready to listen to me*/
03695 do{
03696     WORD *oldwork= AT.WorkPointer;
03697     tag=PF_ReadMaster();/*reads directly to its scratch!*/
03698     if(tag<0)
03699         return(-1);
03700     if(tag == PF_DATA_MSGTAG){
03701         oldwork = AT.WorkPointer;
03702
03703         /* For redefine statements. */
03704         if ( AC.numpfirstnum > 0 ) {
03705             int j;
03706             for ( j = 0; j < AC.numpfirstnum; j++ ) {
03707                 AC.inputnumbers[j] = -1;
03708             }
03709         }
03710
03711         if(PF_DoOneExpr())/*the processor*/
03712             return(-1);
03713         if(PF_Wait4MasterIP(PF_DATA_MSGTAG))
03714             return(-1);
03715         if(PF_Slave2MasterIP(PF.me))/*both master and slave*/
03716             return(-1);
03717         AT.WorkPointer=oldwork;
03718     }/*if(tag == PF_DATA_MSGTAG)*/
03719 }while(tag!=PF_EMPTY_MSGTAG);
03720 PF.exprtoto=-1;
03721 return(0);
03722 }/*PF_InParallelProcessor*/
03723
03724 /*
03725     #] PF_InParallelProcessor :
03726     #[ PF_Wait4MasterIP :
03727 */
03728
03729 static int PF_Wait4MasterIP(int tag)
03730 {
03731     int follow = 0;
03732     LONG cpu,space = 0;
03733
03734     if(PF.log){
03735         fprintf(stderr,"%d] Starting to send to Master\n",PF.me);
03736         fflush(stderr);
03737     }
03738
03739     PF_PreparePack();
03740     cpu = TimeCPU(1);
03741     PF_Pack(&cpu,1,PF_LONG);
03742     PF_Pack(&space,1,PF_LONG);

```

```

03743     PF_Pack(&PF_linterms      ,1,PF_LONG);
03744     PF_Pack(&(AM.S0->GenTerms) ,1,PF_LONG);
03745     PF_Pack(&(AM.S0->TermsLeft),1,PF_LONG);
03746     PF_Pack(&follow           ,1,PF_INT );
03747
03748     if(PF.log){
03749         fprintf(stderr,"%d] Now sending with tag = %d\n",PF.me,tag);
03750         fflush(stderr);
03751     }
03752
03753     PF_Send(MASTER, tag);
03754
03755     if(PF.log){
03756         fprintf(stderr,"%d] returning from send\n",PF.me);
03757         fflush(stderr);
03758     }
03759     return(0);
03760 }
03761 /*
03762     #] PF_Wait4MasterIP :
03763     #[ PF_DoOneExpr :
03764 */
03765
03773 static int PF_DoOneExpr(void)/*the processor*/
03774 {
03775     GETIDENTITY
03776     EXPRESSIONS e;
03777     int i;
03778     WORD *term;
03779     POSITION position, outposition;
03780     FILEHANDLE *fi, *fout;
03781     LONG dd = 0;
03782     WORD oldBracketOn = AR.BracketOn;
03783     WORD *oldBrackBuf = AT.BrackBuf;
03784     WORD oldbracketindexflag = AT.bracketindexflag;
03785     e = Expressions + PF.exprtodo;
03786     i = PF.exprtodo;
03787     AR.CurExpr = i;
03788     AR.SortType = AC.SortType;
03789     AR.expchanged = 0;
03790     if ( ( e->vflags & ISFACTORIZED ) != 0 ) {
03791         AR.BracketOn = 1;
03792         AT.BrackBuf = AM.BracketFactors;
03793         AT.bracketindexflag = 1;
03794     }
03795
03796     position = AS.OldOnFile[i];
03797     if ( e->status == HIDDENLEXPRESSION || e->status == HIDDENEXPRESSION ) {
03798         AR.GetFile = 2; fi = AR.hidefile;
03799     }
03800     else {
03801         AR.GetFile = 0; fi = AR.infile;
03802     }
03803 /*
03804     PUTZERO(fi->PPosition);
03805     if ( fi->handle >= 0 ) {
03806         fi->POfill = fi->POfull = fi->PObuffer;
03807     }
03808 */
03809     SetScratch(fi,&position);
03810     term = AT.WorkPointer;
03811     AR.CompressPointer = AR.CompressBuffer;
03812     AR.CompressPointer[0] = 0;
03813     AR.KeptInHold = 0;
03814     if ( GetTerm(BHEAD term) <= 0 ) {
03815         MesPrint("Expression %d has problems in scratchfile",i);
03816         Terminate(-1);
03817     }
03818     if ( AT.bracketindexflag > 0 ) OpenBracketIndex(i);
03819     term[3] = i;
03820     PUTZERO(outposition);
03821     fout = AR.outfile;
03822     fout->POfill = fout->POfull = fout->PObuffer;
03823     fout->PPosition = outposition;
03824     if ( fout->handle >= 0 ) {
03825         fout->PPosition = outposition;
03826     }
03827 /*
03828     The next statement is needed because we need the system
03829     to believe that the expression is at position zero for
03830     the moment. In this worker, with no memory of other expressions,
03831     it is. This is needed for when a bracket index is made
03832     because there e->onfile is an offset. Afterwards, when the
03833     expression is written to its final location in the masters
03834     output e->onfile will get its real value.
03835 */
03836     PUTZERO(e->onfile);

```

```

03837         if ( PutOut(BHEAD term,&outposition,fout,0) < 0 ) return -1;
03838
03839     AR.DeferFlag = AC.ComDefer;
03840
03841     /*      AR.sLevel = AB[0]->R.sLevel;*/
03842     term = AT.WorkPointer;
03843     NewSort(BHEAD0);
03844     AR.MaxDum = AM.IndDum;
03845     AN.ninterms = 0;
03846     while ( GetTerm(BHEAD term) ) {
03847         SeekScratch(fi,&position);
03848         AN.ninterms++; dd = AN.deferskipped;
03849         if ( ( e->vflags & ISFACTORIZED ) != 0 && term[1] == HAAKJE ) {
03850             StoreTerm(BHEAD term);
03851         }
03852         else {
03853             if ( AC.CollectFun && *term <= (AM.MaxTer/(2*(LONG)sizeof(WORD))) ) {
03854                 if ( GetMoreTerms(term) < 0 ) {
03855                     LowerSortLevel(); return(-1);
03856                 }
03857                 SeekScratch(fi,&position);
03858             }
03859             AT.WorkPointer = term + *term;
03860             AN.RepPoint = AT.RepCount + 1;
03861             if ( AR.DeferFlag ) {
03862                 AR.CurDum = AN.IndDum = Expressions[PF.exprtodo].numdummies;
03863             }
03864             else {
03865                 AN.IndDum = AM.IndDum;
03866                 AR.CurDum = ReNumber(BHEAD term);
03867             }
03868             if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMFLAG);
03869             if ( AN.ncmod ) {
03870                 if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
03871                 else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
03872             }
03873             else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
03874             if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
03875                 && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
03876                 PolyFunClean(BHEAD term);
03877             }
03878             if ( Generator(BHEAD term,0) ) {
03879                 LowerSortLevel(); return(-1);
03880             }
03881             AN.ninterms += dd;
03882         }
03883         SetScratch(fi,&position);
03884         if ( fi == AR.hidefile ) {
03885             AR.InHiBuf = (fi->POfull-fi->PObuffer)
03886                 -DIFBASE(position,fi->POposition)/sizeof(WORD);
03887         }
03888         else {
03889             AR.InInBuf = (fi->POfull-fi->PObuffer)
03890                 -DIFBASE(position,fi->POposition)/sizeof(WORD);
03891         }
03892     }
03893     AN.ninterms += dd;
03894     if ( EndSort(BHEAD AM.S0->sBuffer,0) < 0 ) return(-1);
03895     e->numdummies = AR.MaxDum - AM.IndDum;
03896     AR.BraceOn = oldBracketOn;
03897     AT.BrackBuf = oldBrackBuf;
03898     if ( ( e->vflags & TOBEFACTORED ) != 0 )
03899         poly_factorize_expression(e);
03900     else if ( ( ( e->vflags & TOBEUNFACTORED ) != 0 )
03901         && ( ( e->vflags & ISFACTORIZED ) != 0 ) )
03902         poly_unfactorize_expression(e);
03903     if ( AM.S0->TermsLeft ) e->vflags &= ~ISZERO;
03904     else e->vflags |= ISZERO;
03905     if ( AR.expchanged == 0 ) e->vflags |= ISUNMODIFIED;
03906     if ( AM.S0->TermsLeft ) AR.expflags |= ISZERO;
03907     if ( AR.expchanged ) AR.expflags |= ISUNMODIFIED;*/
03908     AR.GetFile = 0;
03909     AT.bracketindexflag = oldbracketindexflag;
03910
03911     fout->POfull = fout->POfill;
03912     return(0);
03913 }
03914
03915 /*
03916     #] PF_DoOneExpr :
03917     #[ PF_Slave2MasterIP :
03918 */
03919
03920 typedef struct bufIPstruct {
03921     LONG i;
03922     struct ExPrEsSiOn e;
03923 } bufIPstruct_t;

```

```

03924
03925 static int PF_Slave2MasterIP(int src)/*both master and slave*/
03926 {
03927     EXPRESSIONS e;
03928     bufIPstruct_t exprData;
03929     int i,l;
03930     FILEHANDLE *fout=AR.outfile;
03931     POSITION pos;
03932     /*Here we know the length of data to send in advance:
03933     slave has the only one expression in its scratch file, and it sends
03934     this information to the master.*/
03935     if(PF.me != MASTER){/*slave*/
03936         e = Expressions + PF.exprtodo;
03937         /*Fill in the expression data:*/
03938         memcpy(&(exprData.e), e, sizeof(struct ExprEsSiOn));
03939         SeekScratch(fout,&pos);
03940         exprData.i=BASEPOSITION(pos);
03941         /*Send the metadata:*/
03942         if(PF_RawSend(MASTER,&exprData,sizeof(bufIPstruct_t),0))
03943             return(-1);
03944         i=exprData.i;
03945         SETBASEPOSITION(pos,0);
03946         do{
03947             int blen=PF.exprbufsize*sizeof(WORD);
03948             if(i<blen)
03949                 blen=i;
03950             l=PF_SendChunkIP(fout,&pos, MASTER, blen);
03951             /*Here always l == blen!*/
03952             if(l<0)
03953                 return(-1);
03954             ADDPOS(pos,l);
03955             i-=l;
03956         }while(i>0);
03957         if ( fout->handle >= 0 ) { /* Now get rid of the file */
03958             CloseFile(fout->handle);
03959             fout->handle = -1;
03960             remove(fout->name);
03961             PUTZERO(fout->POposition);
03962             PUTZERO(fout->filesize);
03963             fout->POfill = fout->POfull = fout->PObuffer;
03964         }
03965         /* Now handle redefined preprocessor variables. */
03966         if ( AC.numpfirstnum > 0 ) {
03967             PF_PrepareLongSinglePack();
03968             PF_PackRedefinedPreVars();
03969             PF_LongSingleSend(MASTER, PF_MISC_MSGTAG);
03970         }
03971         return(0);
03972     }/*if(PF.me != MASTER)*/
03973     /*Master*/
03974     /*partodoexr[src] is the number of expression.*/
03975     e = Expressions +partodoexr[src];
03976     /*Get metadata:*/
03977     if (PF_RawRecv(&src, &exprData,sizeof(bufIPstruct_t),&i) != sizeof(bufIPstruct_t))
03978         return(-1);
03979     /*Fill in the expression data:*/
03980     /* memcpy(e, &(exprData.e), sizeof(struct ExprEsSiOn)); */
03981     e->counter = exprData.e.counter;
03982     e->vflags = exprData.e.vflags;
03983     e->uflags = exprData.e.uflags;
03984     e->numdummies = exprData.e.numdummies;
03985     e->numfactors = exprData.e.numfactors;
03986     if ( !(e->vflags & ISZERO) ) AR.expflags |= ISZERO;
03987     if ( !(e->vflags & ISUNMODIFIED) ) AR.expflags |= ISUNMODIFIED;
03988     SeekScratch(fout,&pos);
03989     e->onfile = pos;
03990     i=exprData.i;
03991     while(i>0){
03992         int blen=PF.exprbufsize*sizeof(WORD);
03993         if(i<blen)
03994             blen=i;
03995         l=PF_RecvChunkIP(fout,src,blen);
03996         /*Here always l == blen!*/
03997         if(l<0)
03998             return(-1);
03999         i-=l;
04000     }
04001     /* Now handle redefined preprocessor variables. */
04002     if ( AC.numpfirstnum > 0 ) {
04003         PF_LongSingleReceive(src, PF_MISC_MSGTAG, NULL, NULL);
04004         PF_UnpackRedefinedPreVars();
04005     }
04006     return(0);
04007 }
04008
04009 /*
04010 #] PF_Slave2MasterIP :

```

```

04011         #[] PF_Master2SlaveIP :
04012  */
04013
04014 static int PF_Master2SlaveIP(int dest, EXPRESSIONS e)
04015 {
04016     bufIPstruct_t exprData;
04017     FILEHANDLE *fi;
04018     POSITION pos;
04019     int l;
04020     LONG ll=0, count=0;
04021     WORD *t;
04022     if(e==NULL){/*Say to the slave that no more job:*/
04023         if(PF_RawSend(dest, &exprData, sizeof(bufIPstruct_t), PF_EMPTY_MSGTAG))
04024             return(-1);
04025         return(0);
04026     }
04027     memcpy(&(exprData.e), e, sizeof(struct ExprEsSiOn));
04028     exprData.i=e-Expressions;
04029     if ( AC.StatsFlag && AC.OldParallelStats ) {
04030         MesPrint("");
04031         MesPrint(" Sending expression %s to slave %d", EXPRNAME(exprData.i), dest);
04032     }
04033     if(PF_RawSend(dest, &exprData, sizeof(bufIPstruct_t), PF_DATA_MSGTAG))
04034         return(-1);
04035     if ( e->status == HIDDENLEXPRESSSION || e->status == HIDDENLEXPRESSSION )
04036         fi = AR.hidefile;
04037     else
04038         fi = AR.infile;
04039     pos=e->onfile;
04040     SetScratch(fi, &pos);
04041     do{
04042         l=PF_SendChunkIP(fi, &pos, dest, PF.exprbufsize*sizeof(WORD));
04043         if(l<0)
04044             return(-1);
04045         t=fi->PObuffer+ (DIFBASE(pos, fi->POposition))/sizeof(WORD);
04046         ll=PF_WalkThrough(t, ll, l/sizeof(WORD), &count);
04047         ADDPOS(pos, l);
04048     }while(ll>=2);
04049     return(0);
04050 }
04051
04052  */
04053         #[] PF_Master2SlaveIP :
04054         #[] PF_ReadMaster :
04055  */
04056
04057 static int PF_ReadMaster(void)/*reads directly to its scratch!*/
04058 {
04059     bufIPstruct_t exprData;
04060     int tag, m=MASTER;
04061     EXPRESSIONS e;
04062     FILEHANDLE *fi;
04063     POSITION pos;
04064     LONG count=0;
04065     WORD *t;
04066     LONG ll=0;
04067     int l;
04068     /*Get metadata:*/
04069     if (PF_RawRecv(&m, &exprData, sizeof(bufIPstruct_t), &tag) != sizeof(bufIPstruct_t))
04070         return(-1);
04071
04072     if(tag == PF_EMPTY_MSGTAG)/*No data, no job*/
04073         return(tag);
04074
04075     /*data expected, tag must be == PF_DATA_MSTAG!*/
04076     PF.exprtodo=exprData.i;
04077     e=Expressions + PF.exprtodo;
04078     /*Fill in the expression data:*/
04079     /* memcpy(e, &(exprData.e), sizeof(struct ExprEsSiOn)); */
04080     if ( e->status == HIDDENLEXPRESSSION || e->status == HIDDENLEXPRESSSION )
04081         fi = AR.hidefile;
04082     else
04083         fi = AR.infile;
04084     SetEndHScratch(fi, &pos);
04085     e->onfile=AS.OldOnFile[PF.exprtodo]=pos;
04086
04087     do{
04088         l=PF_RecvChunkIP(fi, MASTER, PF.exprbufsize*sizeof(WORD));
04089         if(l<0)
04090             return(-1);
04091         t=fi->POfull-l/sizeof(WORD);
04092         ll=PF_WalkThrough(t, ll, l/sizeof(WORD), &count);
04093     }while(ll>=2);
04094     /*Now -ll-2 is the number of "extra" elements transferred from the master.*/
04095     fi->POfull=-ll-2;
04096     fi->POfill=fi->POfull;
04097     return(PF_DATA_MSGTAG);

```

```

04098 }
04099
04100 /*
04101     #] PF_ReadMaster :
04102     #[ PF_SendChunkIP :
04103     thesize is in bytes. Returns the number of sent bytes or <0 on error:
04104 */
04105
04106 static int PF_SendChunkIP(FILEHANDLE *curfile, POSITION *position, int to, LONG thesize)
04107 {
04108     LONG l=thesize;
04109     if(
04110         ISLESSPOS(*position,curfile->POposition) ||
04111         ISGEPOSINC(*position,curfile->POposition,
04112             ((curfile->POfull-curfile->PObuffer)*sizeof(WORD)-thesize) )
04113     ){
04114         if(curfile->handle< 0)
04115             l=(curfile->POfull-curfile->PObuffer)*sizeof(WORD) - (LONG)(position->p1);
04116         else{
04117             PF_SetScratch(curfile,position);
04118             if(
04119                 ISGEPOSINC(*position,curfile->POposition,
04120                     ((curfile->POfull-curfile->PObuffer)*sizeof(WORD)-thesize) )
04121             )
04122                 l=(curfile->POfull-curfile->PObuffer)*sizeof(WORD) - (LONG)position->p1;
04123         }
04124     }
04125     /*Now we are able to sent l bytes from the
04126     curfile->PObuffer[position-curfile->POposition]*/
04127     if(PF_RawSend(to,curfile->PObuffer+ (DIFBASE(*position,curfile->POposition))/sizeof(WORD),l,0))
04128         return(-1);
04129     return(l);
04130 }
04131
04132 /*
04133     #] PF_SendChunkIP :
04134     #[ PF_RecvChunkIP :
04135     thesize is in bytes. Returns the number of sent bytes or <0 on error:
04136 */
04137
04138 static int PF_RecvChunkIP(FILEHANDLE *curfile, int from, LONG thesize)
04139 {
04140     LONG receivedBytes;
04141
04142     if( (LONG)((curfile->POstop - curfile->POfull)*sizeof(WORD)) < thesize )
04143         if(PF_pushScratch(curfile))
04144             return(-1);
04145     /*Now there is enough space from curfile->POfill to curfile->POstop*/
04146     /*Block:*/
04147     int tag=0;
04148     receivedBytes=PF_RawRecv(&from,curfile->POfull,thesize,&tag);
04149     /*:Block*/
04150     if(receivedBytes >= 0 ){
04151         curfile->POfull+=receivedBytes/sizeof(WORD);
04152         curfile->POfill=curfile->POfull;
04153     }/*if(receivedBytes >= 0 )*/
04154     return(receivedBytes);
04155 }
04156
04157 /*
04158     #] PF_RecvChunkIP :
04159     #[ PF_WalkThrough :
04160     Returns:
04161     >= 0 -- initial offset,
04162     -1 -- the first element of t contains the length of the tail of compressed term,
04163     <= -2 -- -(d+2), where d is the number of extra transferred elements.
04164     Expects:
04165     l -- initial offset or -1,
04166     chunk -- number of transferred elements (not bytes!)
04167     *count -- incremented each time a new term is found
04168 */
04169
04170 static int PF_WalkThrough(WORD *t, LONG l, LONG chunk, LONG *count)
04171 {
04172     if(l<0) /*== -1!*/
04173         l=(*t)+1; /*the first element of t contains the length of
04174             the tail of compressed term*/
04175     else{
04176         if(l>=chunk) /*next term is out of the chunk*/
04177             return(l-chunk);
04178         t+=l;
04179         chunk-=l; /*note, l was less than chunk so chunk >0!*/
04180         l=*t;
04181     }
04182     /*Main loop:*/
04183     while(l!=0){
04184         if(l>0){/*an offset to the next term*/

```

```

04185         if(l<chunk){
04186             t+=1;
04187             chunk-=1; /*note, l was less than chunk so chunk >0!*/
04188             l=*t;
04189             (*count)++;
04190         } /*if(l<chunk)*/
04191         else
04192             return(l-chunk);
04193     } /*if(l>0)*/
04194     else{ /* l<0 */
04195         if(chunk < 2) /*i.e., chunk == 1*/
04196             return(-1); /*the first WORD in the next chunk is length of the tail of the compressed
term*/
04197         l=(t+1)+2; /*+2 since
04198             1. t points to the length field -1,
04199             2. the size of a tail of compressed term is equal to the number of WORDs in this
tail*/
04200     }
04201 } /*while(l!=0)*/
04202 return(-1-chunk); /* -(2+(chunk-1)), chunk>0 ! */
04203 }
04204
04205 /*
04206     #] PF_WalkThrough :
04207     #] InParallel mode :
04208     #[ PF_SendFile :
04209 */
04210
04211 #define PF_SNDFILEBUFSIZE 4096
04212
04220 int PF_SendFile(int to, FILE *fd)
04221 {
04222     size_t len=0;
04223     if(fd == NULL){
04224         if(PF_RawSend(to,&to,sizeof(int),PF_EMPTY_MSGTAG)
04225             return(-1);
04226         return(0);
04227     }
04228     for(;;){
04229         char buf[PF_SNDFILEBUFSIZE];
04230         size_t l;
04231         l=fread(buf, 1, PF_SNDFILEBUFSIZE, fd);
04232         len+=l;
04233         if(l==PF_SNDFILEBUFSIZE){
04234             if(PF_RawSend(to,buf,PF_SNDFILEBUFSIZE,PF_BUFFER_MSGTAG)
04235                 return(-1);
04236         }
04237         else{
04238             if(PF_RawSend(to,buf,l,PF_ENDBUFFER_MSGTAG)
04239                 return(-1);
04240             break;
04241         }
04242     } /*for(;;)*/
04243     return(len);
04244 }
04245
04246 /*
04247     #] PF_SendFile :
04248     #[ PF_RecvFile :
04249 */
04250
04258 int PF_RecvFile(int from, FILE *fd)
04259 {
04260     size_t len=0;
04261     int tag;
04262     do{
04263         char buf[PF_SNDFILEBUFSIZE];
04264         int l;
04265         l=PF_RawRecv(&from,buf,PF_SNDFILEBUFSIZE,&tag);
04266         if(l<0)
04267             return(-1);
04268         if(tag == PF_EMPTY_MSGTAG)
04269             return(-1);
04270
04271         if( fwrite(buf,l,1,fd) !=1 )
04272             return(-1);
04273         len+=l;
04274     }while(tag!=PF_ENDBUFFER_MSGTAG);
04275     return(len);
04276 }
04277
04278 /*
04279     #] PF_RecvFile :
04280     #[ Synchronised output :
04281     #[ Explanations :
04282 */
04283

```

```

04284 /*
04285  * If the master and slaves output statistics or error messages to the same stream
04286  * or file (e.g., the standard output or the log file) simultaneously, then
04287  * a mixing of their outputs can occur. To avoid this, TFORM uses a lock of
04288  * ErrorMessageLock, but there is no locking functionality in the original MPI
04289  * specification. We need to synchronise the output from the master and slaves.
04290  *
04291  * The idea of the synchronised output (by, e.g., MesPrint()) implemented here is
04292  * Slaves:
04293  * 1. Save the output by WriteFile() (set to PF_WriteFileToFile())
04294  *    into some buffers between MLOCK(ErrorMessageLock) and
04295  *    MUNLOCK(ErrorMessageLock), which call PF_MLock() and PF_MUnlock(),
04296  *    respectively. The output for AM.StdOut and AC.LogHandle are saved to
04297  *    the buffers.
04298  * 2. At MUNLOCK(ErrorMessageLock), send the output in the buffer to the master,
04299  *    with PF_STDOUT_MSGTAG or PF_LOG_MSGTAG.
04300  * Master:
04301  * 1. Receive the buffered output from slaves, and write them by
04302  *    WriteFileToFile().
04303  * The main problem is how and where the master receives messages from
04304  * the slaves (PF_ReceiveErrorMessage()). For this purpose there are three
04305  * helper functions: PF_CatchErrorMessages() and PF_CatchErrorMessagesForAll()
04306  * which remove messages with PF_STDOUT_MSGTAG or PF_LOG_MSGTAG from the top
04307  * of the message queue, and PF_ProbeWithCatchingErrorMessages() which is same as
04308  * PF_Probe() except removing these messages.
04309  */
04310
04311 /*
04312     #] Explanations :
04313     #[ Variables :
04314 */
04315
04316 static int errorMessageLock = 0; /* (slaves) The lock count. See PF_MLock() and PF_MUnlock(). */
04317 static Vector(UBYTE, stdoutBuffer); /* (slaves) The buffer for AM.StdOut. */
04318 static Vector(UBYTE, logBuffer); /* (slaves) The buffer for AC.LogHandle. */
04319 #define recvBuffer logBuffer /* (master) The buffer for receiving messages. */
04320
04321 /*
04322  * If PF_ENABLE_STDOUT_BUFFERING is defined, the master performs the line buffering
04323  * (using stdoutBuffer) at PF_WriteFileToFile().
04324  */
04325 #ifndef PF_ENABLE_STDOUT_BUFFERING
04326 #ifdef UNIX
04327 #define PF_ENABLE_STDOUT_BUFFERING
04328 #endif
04329 #endif
04330
04331 /*
04332     #] Variables :
04333     #[ PF_MLock :
04334 */
04335
04336 void PF_MLock(void)
04337 {
04338     /* Only on slaves. */
04339     if ( errorMessageLock++ > 0 ) return;
04340     VectorClear(stdoutBuffer);
04341     VectorClear(logBuffer);
04342 }
04343
04344 /*
04345     #] PF_MLock :
04346     #[ PF_MUnlock :
04347 */
04348
04349 void PF_MUnlock(void)
04350 {
04351     /* Only on slaves. */
04352     if ( --errorMessageLock > 0 ) return;
04353     if ( !VectorEmpty(stdoutBuffer) ) {
04354         PF_RawSend(MASTER, VectorPtr(stdoutBuffer), VectorSize(stdoutBuffer), PF_STDOUT_MSGTAG);
04355     }
04356     if ( !VectorEmpty(logBuffer) ) {
04357         PF_RawSend(MASTER, VectorPtr(logBuffer), VectorSize(logBuffer), PF_LOG_MSGTAG);
04358     }
04359 }
04360
04361 /*
04362     #] PF_MUnlock :
04363     #[ PF_WriteFileToFile :
04364 */
04365
04366 LONG PF_WriteFileToFile(int handle, UBYTE *buffer, LONG size)
04367 {
04368     if ( PF.me != MASTER && errorMessageLock > 0 ) {
04369         if ( handle == AM.StdOut ) {
04370             VectorPushBacks(stdoutBuffer, buffer, size);

```



```

04389         return size;
04390     }
04391     else if ( handle == AC.LogHandle ) {
04392         VectorPushBacks(logBuffer, buffer, size);
04393         return size;
04394     }
04395 }
04396 #ifdef PF_ENABLE_STDOUT_BUFFERING
04397 /*
04398  * On my computer, sometimes a single linefeed "\n" sent to the standard
04399  * output is ignored on the execution of mpiexec. A typical example is:
04400  * $ cat foo.c
04401  * #include <unistd.h>
04402  * int main() {
04403  *     write(1, "      ", 4);
04404  *     write(1, "\n", 1);
04405  *     write(1, "      ", 4);
04406  *     write(1, "123\n", 4);
04407  *     return 0;
04408  * }
04409  * or even as a shell script:
04410  * $ cat foo.sh
04411  * #! bin/sh
04412  * printf "      "
04413  * printf "\n"
04414  * printf "      "
04415  * printf "123\n"
04416  * When I ran it on mpiexec
04417  * $ while :; do mpiexec -np 1 ./foo.sh; done
04418  * I observed the single linefeed (printf "\n") was sometimes ignored. Even
04419  * though this phenomenon might be specific to my environment, I added this
04420  * code because someone may encounter a similar phenomenon and feel it
04421  * frustrating. (TU 16 Jun 2011)
04422  *
04423  * Phenomenon:
04424  * A single linefeed sent to the standard output occasionally ignored
04425  * on mpiexec.
04426  *
04427  * Environment:
04428  * openSUSE 11.4 (x86_64)
04429  * kernel: 2.6.37.6-0.5-desktop
04430  * gcc: 4.5.1 20101208
04431  * mpich2-1.3.2p1 configured with '--enable-shared --with-pm=smpd'
04432  *
04433  * Solution:
04434  * In Unix (in which Uwrite() calls write() system call without any buffering),
04435  * we perform the line buffering here. A single linefeed is also buffered.
04436  *
04437  * XXX:
04438  * At the end of the program the buffered output (text without LF) will not be flushed,
04439  * i.e., will not be written to the standard output. This is not problematic at a normal run.
04440  * The buffer can be explicitly flushed by PF_FlushStdOutBuffer().
04441  */
04442 if ( PF.me == MASTER && handle == AM.StdOut ) {
04443     size_t oldsize;
04444     /* Assume the newline character is LF (when UNIX is defined). */
04445     if ( (size > 0 && buffer[size - 1] != LINEFEED) || (size == 1 && buffer[0] == LINEFEED) ) {
04446         VectorPushBacks(stdoutBuffer, buffer, size);
04447         return size;
04448     }
04449     if ( (oldsize = VectorSize(stdoutBuffer)) > 0 ) {
04450         LONG ret;
04451         VectorPushBacks(stdoutBuffer, buffer, size);
04452         ret = WriteFileToFile(handle, VectorPtr(stdoutBuffer), VectorSize(stdoutBuffer));
04453         VectorClear(stdoutBuffer);
04454         if ( ret < 0 ) {
04455             return ret;
04456         }
04457         else if ( ret < (LONG)oldsize ) {
04458             return 0; /* This means the buffered output in previous calls is lost. */
04459         }
04460         else {
04461             return ret - (LONG)oldsize;
04462         }
04463     }
04464 }
04465 #endif
04466 return WriteFileToFile(handle, buffer, size);
04467 }
04468
04469 /*
04470     #] PF_WriteFileToFile :
04471     #[ PF_FlushStdOutBuffer :
04472 */
04473
04478 void PF_FlushStdOutBuffer(void)
04479 {

```

```

04480 #ifdef PF_ENABLE_STDOUT_BUFFERING
04481     if ( PF.me == MASTER && VectorSize(stdoutBuffer) > 0 ) {
04482         WriteFileToFile(AM.Stdout, VectorPtr(stdoutBuffer), VectorSize(stdoutBuffer));
04483         VectorClear(stdoutBuffer);
04484     }
04485 #endif
04486 }
04487
04488 /*
04489     #] PF_FlushStdOutBuffer :
04490     #[ PF_ReceiveErrorMessage :
04491 */
04492
04501 static void PF_ReceiveErrorMessage(int src, int tag)
04502 {
04503     /* Only on the master. */
04504     int size;
04505     int ret = PF_RawProbe(&src, &tag, &size);
04506     CHECK(ret == 0);
04507     switch ( tag ) {
04508         case PF_STDOUT_MSGTAG:
04509             case PF_LOG_MSGTAG:
04510                 VectorReserve(recvBuffer, size);
04511                 ret = PF_RawRecv(&src, VectorPtr(recvBuffer), size, &tag);
04512                 CHECK(ret == size);
04513                 if ( size > 0 ) {
04514                     int handle = (tag == PF_STDOUT_MSGTAG) ? AM.Stdout : AC.LogHandle;
04515 #ifdef PF_ENABLE_STDOUT_BUFFERING
04516                     if ( handle == AM.Stdout ) PF_WriteFileToFile(handle, VectorPtr(recvBuffer), size);
04517                     else
04518 #endif
04519                         WriteFileToFile(handle, VectorPtr(recvBuffer), size);
04520                 }
04521                 break;
04522     }
04523 }
04524
04525 /*
04526     #] PF_ReceiveErrorMessage :
04527     #[ PF_CatchErrorMessages :
04528 */
04529
04538 static void PF_CatchErrorMessages(int *src, int *tag)
04539 {
04540     /* Only on the master. */
04541     for (;;) {
04542         int asrc = *src;
04543         int atag = *tag;
04544         int ret = PF_RawProbe(&asrc, &atag, NULL);
04545         CHECK(ret == 0);
04546         if ( atag == PF_STDOUT_MSGTAG || atag == PF_LOG_MSGTAG ) {
04547             PF_ReceiveErrorMessage(asrc, atag);
04548             continue;
04549         }
04550         *src = asrc;
04551         *tag = atag;
04552         break;
04553     }
04554 }
04555
04556 /*
04557     #] PF_CatchErrorMessages :
04558     #[ PF_CatchErrorMessagesForAll :
04559 */
04560
04565 static void PF_CatchErrorMessagesForAll(void)
04566 {
04567     /* Only on the master. */
04568     int i;
04569     for ( i = 1; i < PF.numtasks; i++ ) {
04570         int src = i;
04571         int tag = PF_ANY_MSGTAG;
04572         PF_CatchErrorMessages(&src, &tag);
04573     }
04574 }
04575
04576 /*
04577     #] PF_CatchErrorMessagesForAll :
04578     #[ PF_ProbeWithCatchingErrorMessages :
04579 */
04580
04590 static int PF_ProbeWithCatchingErrorMessages(int *src)
04591 {
04592     for (;;) {
04593         int newsrc = *src;
04594         int tag = PF_Probe(&newsrc);
04595         if ( tag == PF_STDOUT_MSGTAG || tag == PF_LOG_MSGTAG ) {

```

```


04596         PF_ReceiveErrorMessage(newsrc, tag);
04597         continue;
04598     }
04599     if ( tag > 0 ) *src = newsrc;
04600     return tag;
04601 }
04602 }
04603
04604 /*
04605     #] PF_ProbeWithCatchingErrorMessages :
04606     #[ PF_FreeErrorMessageBuffers :
04607 */
04608
04614 void PF_FreeErrorMessageBuffers(void)
04615 {
04616     VectorFree(stdoutBuffer);
04617     VectorFree(logBuffer);
04618 }
04619
04620 /*
04621     #] PF_FreeErrorMessageBuffers :
04622     #] Synchronised output :
04623 */

```

4.99 parallel.h File Reference

```
#include <mpi.h>
```

Include dependency graph for parallel.h:



Data Structures

- struct [PF_BUFFER](#)
- struct [ParallelVars](#)

Macros

- #define [MASTER](#) 0
- #define [PF_RESET](#) 0
- #define [PF_TIME](#) 1
- #define [PF_TERM_MSGTAG](#) 10 /* master -> slave: sending terms */
- #define [PF_ENDSORT_MSGTAG](#) 11 /* master -> slave: no more terms to be distributed, slave -> master: after [EndSort\(\)](#) */
- #define [PF_DOLLAR_MSGTAG](#) 12 /* slave -> master: sending \$-variables */
- #define [PF_BUFFER_MSGTAG](#) 20 /* slave -> master: sending sorted terms, or in [PF_SendFile\(\)](#)/[PF_RecvFile\(\)](#) */

- `#define PF_ENDBUFFER_MSGTAG 21 /* same as PF_BUFFER_MSGTAG, but indicates the end of operation */`
- `#define PF_READY_MSGTAG 30 /* slave -> master: slave is idle and can accept terms */`
- `#define PF_DATA_MSGTAG 50 /* InParallel, DoCheckpoint() */`
- `#define PF_EMPTY_MSGTAG 52 /* InParallel, DoCheckpoint(), PF_SendFile(), PF_RecvFile() */`
- `#define PF_STDOUT_MSGTAG 60 /* slave -> master: sending text to the stdout */`
- `#define PF_LOG_MSGTAG 61 /* slave -> master: sending text to the log file */`
- `#define PF_OPT_MCTS_MSGTAG 70 /* master <-> slave: optimization */`
- `#define PF_OPT_HORNER_MSGTAG 71 /* master <-> slave: optimization */`
- `#define PF_OPT_COLLECT_MSGTAG 72 /* slave -> master: optimization */`
- `#define PF_MISC_MSGTAG 100`
- `#define GNUC_PREREQ(major, minor, patchlevel) 0`
- `#define OMPI_SKIP_MPICXX 1`
- `#define indices ((INDICES))(AC.IndexList.lijst)`
- `#define PF_ANY_SOURCE MPI_ANY_SOURCE`
- `#define PF_ANY_MSGTAG MPI_ANY_TAG`
- `#define PF_COMM MPI_COMM_WORLD`
- `#define PF_BYTE MPI_BYTE`
- `#define PF_INT MPI_INT`
- `#define PF_LongMultiPack(buffer, count, type) PF_LongMultiPackImpl(buffer, count, sizeof_datatype(type), type)`
- `#define PF_LongMultiUnpack(buffer, count, type) PF_LongMultiUnpackImpl(buffer, count, sizeof_↵ datatype(type), type)`

Typedefs

- `typedef struct ParallelVars PARALLELVARS`

Functions

- `int PF_ISendSbuf (int, int)`
- `int PF_Bcast (void *buffer, int count)`
- `int PF_RawSend (int, void *, LONG, int)`
- `LONG PF_RawRecv (int *, void *, LONG, int *)`
- `int PF_PreparePack (void)`
- `int PF_Pack (const void *buffer, size_t count, MPI_Datatype type)`
- `int PF_Unpack (void *buffer, size_t count, MPI_Datatype type)`
- `int PF_PackString (const UBYTE *str)`
- `int PF_UnpackString (UBYTE *str)`
- `int PF_Send (int to, int tag)`
- `int PF_Receive (int src, int tag, int *psrc, int *ptag)`
- `int PF_Broadcast (void)`
- `int PF_PrepareLongSinglePack (void)`
- `int PF_LongSinglePack (const void *buffer, size_t count, MPI_Datatype type)`
- `int PF_LongSingleUnpack (void *buffer, size_t count, MPI_Datatype type)`
- `int PF_LongSingleSend (int to, int tag)`
- `int PF_LongSingleReceive (int src, int tag, int *psrc, int *ptag)`
- `int PF_PrepareLongMultiPack (void)`
- `int PF_LongMultiPackImpl (const void *buffer, size_t count, size_t eSize, MPI_Datatype type)`
- `int PF_LongMultiUnpackImpl (void *buffer, size_t count, size_t eSize, MPI_Datatype type)`
- `int PF_LongMultiBroadcast (void)`
- `int PF_EndSort (void)`
- `WORD PF_Deferred (WORD *, WORD)`

- int [PF_Processor](#) ([EXPRESSIONS](#), WORD, WORD)
- int [PF_Init](#) (int *, char ***)
- int [PF_Terminate](#) (int)
- LONG [PF_GetSlaveTimes](#) (void)
- LONG [PF_BroadcastNumber](#) (LONG)
- void [PF_BroadcastBuffer](#) (WORD **buffer, LONG *length)
- int [PF_BroadcastString](#) (UBYTE *)
- int [PF_BroadcastPreDollar](#) (WORD **, LONG *, int *)
- int [PF_CollectModifiedDollars](#) (void)
- int [PF_BroadcastModifiedDollars](#) (void)
- int [PF_BroadcastRedefinedPreVars](#) (void)
- int [PF_BroadcastCBuf](#) (int bufnum)
- int [PF_BroadcastExpFlags](#) (void)
- int [PF_StoreInsideInfo](#) (void)
- int [PF_RestoreInsideInfo](#) (void)
- int [PF_BroadcastExpr](#) ([EXPRESSIONS](#) e, [FILEHANDLE](#) *file)
- int [PF_BroadcastRHS](#) (void)
- int [PF_InParallelProcessor](#) (void)
- int [PF_SendFile](#) (int to, FILE *fd)
- int [PF_RecvFile](#) (int from, FILE *fd)
- void [PF_MLock](#) (void)
- void [PF_MUnlock](#) (void)
- LONG [PF_WriteFileToFile](#) (int, UBYTE *, LONG)
- void [PF_FlushStdOutBuffer](#) (void)

Variables

- [PARALLELVARS](#) PF
- LONG [PF_maxDollarChunkSize](#)

4.99.1 Detailed Description

Header file with things relevant to ParForm.

Definition in file [parallel.h](#).

4.99.2 Macro Definition Documentation

4.99.2.1 MASTER

```
#define MASTER 0
```

Definition at line 39 of file [parallel.h](#).

4.99.2.2 PF_RESET

```
#define PF_RESET 0
```

Definition at line 41 of file [parallel.h](#).

4.99.2.3 PF_TIME

```
#define PF_TIME 1
```

Definition at line 42 of file [parallel.h](#).

4.99.2.4 PF_TERM_MSGTAG

```
#define PF_TERM_MSGTAG 10 /* master -> slave:  sending terms */
```

Definition at line 44 of file [parallel.h](#).

4.99.2.5 PF_ENDSORT_MSGTAG

```
#define PF_ENDSORT_MSGTAG 11 /* master -> slave:  no more terms to be distributed, slave ->
master:  after EndSort() */
```

Definition at line 45 of file [parallel.h](#).

4.99.2.6 PF_DOLLAR_MSGTAG

```
#define PF_DOLLAR_MSGTAG 12 /* slave -> master:  sending $-variables */
```

Definition at line 46 of file [parallel.h](#).

4.99.2.7 PF_BUFFER_MSGTAG

```
#define PF_BUFFER_MSGTAG 20 /* slave -> master:  sending sorted terms, or in PF_SendFile()/PF_RecvFile()
*/
```

Definition at line 47 of file [parallel.h](#).

4.99.2.8 PF_ENDBUFFER_MSGTAG

```
#define PF_ENDBUFFER_MSGTAG 21 /* same as PF_BUFFER_MSGTAG, but indicates the end of operation
*/
```

Definition at line 48 of file [parallel.h](#).

4.99.2.9 PF_READY_MSGTAG

```
#define PF_READY_MSGTAG 30 /* slave -> master:  slave is idle and can accept terms */
```

Definition at line 49 of file [parallel.h](#).

4.99.2.10 PF_DATA_MSGTAG

```
#define PF_DATA_MSGTAG 50 /* InParallel, DoCheckpoint() */
```

Definition at line 50 of file [parallel.h](#).

4.99.2.11 PF_EMPTY_MSGTAG

```
#define PF_EMPTY_MSGTAG 52 /* InParallel, DoCheckpoint(), PF_SendFile(), PF_RecvFile() */
```

Definition at line 51 of file [parallel.h](#).

4.99.2.12 PF_STDOUT_MSGTAG

```
#define PF_STDOUT_MSGTAG 60 /* slave -> master: sending text to the stdout */
```

Definition at line 52 of file [parallel.h](#).

4.99.2.13 PF_LOG_MSGTAG

```
#define PF_LOG_MSGTAG 61 /* slave -> master: sending text to the log file */
```

Definition at line 53 of file [parallel.h](#).

4.99.2.14 PF_OPT_MCTS_MSGTAG

```
#define PF_OPT_MCTS_MSGTAG 70 /* master <-> slave: optimization */
```

Definition at line 54 of file [parallel.h](#).

4.99.2.15 PF_OPT_HORNER_MSGTAG

```
#define PF_OPT_HORNER_MSGTAG 71 /* master <-> slave: optimization */
```

Definition at line 55 of file [parallel.h](#).

4.99.2.16 PF_OPT_COLLECT_MSGTAG

```
#define PF_OPT_COLLECT_MSGTAG 72 /* slave -> master: optimization */
```

Definition at line 56 of file [parallel.h](#).

4.99.2.17 PF_MISC_MSGTAG

```
#define PF_MISC_MSGTAG 100
```

Definition at line 57 of file [parallel.h](#).

4.99.2.18 GNUC_PREREQ

```
#define GNUC_PREREQ(  
    major,  
    minor,  
    patchlevel ) 0
```

Definition at line 67 of file [parallel.h](#).

4.99.2.19 OMPI_SKIP_MPICXX

```
#define OMPI_SKIP_MPICXX 1
```

Definition at line 108 of file [parallel.h](#).

4.99.2.20 indices

```
#define indices ((INDICES)(AC.IndexList.lijst))
```

Definition at line 113 of file [parallel.h](#).

4.99.2.21 PF_ANY_SOURCE

```
#define PF_ANY_SOURCE MPI_ANY_SOURCE
```

Definition at line 123 of file [parallel.h](#).

4.99.2.22 PF_ANY_MSGTAG

```
#define PF_ANY_MSGTAG MPI_ANY_TAG
```

Definition at line 124 of file [parallel.h](#).

4.99.2.23 PF_COMM

```
#define PF_COMM MPI_COMM_WORLD
```

Definition at line 125 of file [parallel.h](#).

4.99.2.24 PF_BYTE

```
#define PF_BYTE MPI_BYTE
```

Definition at line 126 of file [parallel.h](#).

4.99.2.25 PF_INT

```
#define PF_INT MPI_INT
```

Definition at line 127 of file [parallel.h](#).

4.99.2.26 PF_LongMultiPack

```
#define PF_LongMultiPack(  
    buffer,  
    count,  
    type ) PF_LongMultiPackImpl(buffer, count, sizeof_datatype(type), type)
```

Definition at line 232 of file [parallel.h](#).

4.99.2.27 PF_LongMultiUnpack

```
#define PF_LongMultiUnpack(  
    buffer,  
    count,  
    type ) PF_LongMultiUnpackImpl(buffer, count, sizeof_datatype(type), type)
```

Definition at line 233 of file [parallel.h](#).

4.99.3 Function Documentation

4.99.3.1 PF_IsendSbuf()

```
int PF_IsendSbuf (  
    int to,  
    int tag ) [extern]
```

Nonblocking send operation. It sends everything from *buff* to *fill* of the active buffer. Depending on *tag* it also can do waiting for other sends to finish or set the active buffer to the next one.

Parameters

<i>to</i>	the destination process number.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line 261 of file [mpi.c](#).

Referenced by [FlushOut\(\)](#), [PF_Processor\(\)](#), and [PutOut\(\)](#).

4.99.3.2 PF_Bcast()

```
int PF_Bcast (
    void * buffer,
    int count ) [extern]
```

Broadcasts a message from the master to slaves.

Parameters

<i>in, out</i>	<i>buffer</i>	the starting address of buffer. The contents in this buffer on the master will be transferred to those on the slaves.
	<i>count</i>	the length of the buffer in bytes.

Returns

0 if OK, nonzero on error.

Definition at line [440](#) of file [mpi.c](#).

Referenced by [PF_BroadcastBuffer\(\)](#), and [PF_BroadcastNumber\(\)](#).

4.99.3.3 PF_RawSend()

```
int PF_RawSend (
    int dest,
    void * buf,
    LONG l,
    int tag ) [extern]
```

Sends *l* bytes from *buf* to *dest*. Returns 0 on success, or -1.

Parameters

<i>dest</i>	the destination process number.
<i>buf</i>	the send buffer.
<i>l</i>	the size of data in the send buffer in bytes.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line [463](#) of file [mpi.c](#).

4.99.3.4 PF_RawRecv()

```
LONG PF_RawRecv (
    int * src,
```

```
void * buf,
LONG thesize,
int * tag ) [extern]
```

Receives not more than *thesize* bytes from *src*, returns the actual number of received bytes, or -1 on failure.

Parameters

in, out	<i>src</i>	the source process number. In output, that of the actual received message.
out	<i>buf</i>	the receive buffer.
	<i>thesize</i>	the size of the receive buffer in bytes.
out	<i>tag</i>	the message tag of the actual received message.

Returns

the actual sizeof received data in bytes, or -1 on failure.

Definition at line 484 of file [mpi.c](#).

4.99.3.5 PF_PreparePack()

```
int PF_PreparePack (
    void ) [extern]
```

Prepares for the next pack operations on the sender.

Returns

0 if OK, nonzero on error.

Definition at line 624 of file [mpi.c](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), [PF_BroadcastString\(\)](#), and [PF_Init\(\)](#).

4.99.3.6 PF_Pack()

```
int PF_Pack (
    const void * buffer,
    size_t count,
    MPI_Datatype type ) [extern]
```

Adds data into the pack buffer.

Parameters

<i>buffer</i>	the pointer to the buffer storing the data to be packed.
<i>count</i>	the number of elements in the buffer.
<i>type</i>	the data type of elements in the buffer.

Returns

0 if OK, nonzero on error.

Definition at line 642 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), and [PF_Init\(\)](#).

4.99.3.7 PF_Unpack()

```
int PF_Unpack (
    void * buffer,
    size_t count,
    MPI_Datatype type ) [extern]
```

Retrieves the next data in the pack buffer.

Parameters

out	<i>buffer</i>	the pointer to the buffer to store the unpacked data.
	<i>count</i>	the number of elements of data to be received.
	<i>type</i>	the data type of elements of data to be received.

Returns

0 if OK, nonzero on error.

Definition at line 671 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), and [PF_Init\(\)](#).

4.99.3.8 PF_PackString()

```
int PF_PackString (
    const UBYTE * str ) [extern]
```

Packs a string *str* into the packed buffer `PF_packbuf`, including the trailing zero.

The first element (`PF_INT`) is the length of the packed portion of the string. If the string does not fit to the buffer `PF_packbuf`, the function packs only the initial portion. It returns the number of packed bytes, so if `(str[length-1]=='\0')` then the whole string fits to the buffer, if not, then the rest (`str+length`) must be packed and send again. On error, the function returns the negative error code.

One exception: the string `"\0\0"` is used as an image of the NULL, so all 3 characters will be packed.

Parameters

<i>str</i>	a string to be packed.
------------	------------------------

Returns

the number of packed bytes, or a negative value on failure.

Definition at line 706 of file [mpi.c](#).

Referenced by [PF_BroadcastString\(\)](#).

4.99.3.9 PF_UnpackString()

```
int PF_UnpackString (
    UBYTE * str ) [extern]
```

Unpacks a string to *str* from the packed buffer PF_packbuf, including the trailing zero.

It returns the number of unpacked bytes, so if (str[length-1]=='\0') then the whole string was unpacked, if not, then the rest must be appended to (str+length). On error, the function returns the negative error code.

Parameters

<i>out</i>	<i>str</i>	the buffer to store the unpacked string
------------	------------	---

Returns

the number of unpacked bytes, or a negative value on failure.

Definition at line 774 of file [mpi.c](#).

Referenced by [PF_BroadcastString\(\)](#).

4.99.3.10 PF_Send()

```
int PF_Send (
    int to,
    int tag ) [extern]
```

Sends the contents in the pack buffer to the process specified by *to*.

Example:

```
if ( PF.me == SRC ) {
    PF_PreparePack();
    // Packing operations here...
    PF_Send(DEST, TAG);
}
else if ( PF.me == DEST ) {
    PF_Receive(SRC, TAG, &actual_src, &actual_tag);
    // Unpacking operations here...
}
```

Parameters

<i>to</i>	the destination process number.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line 822 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

4.99.3.11 PF_Receive()

```
int PF_Receive (
    int src,
    int tag,
    int * psrc,
    int * ptag ) [extern]
```

Receives data into the pack buffer from the process specified by *src*. This function allows &src == psrc or &tag == ptag. Either *psrc* or *ptag* can be NULL.

See the example of [PF_Send\(\)](#).

Parameters

	<i>src</i>	the source process number (can be PF_ANY_SOURCE).
	<i>tag</i>	the source message tag (can be PF_ANY_TAG).
out	<i>psrc</i>	the actual source process number of received message.
out	<i>ptag</i>	the received message tag.

Returns

0 if OK, nonzero on error.

Definition at line 848 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

4.99.3.12 PF_Broadcast()

```
int PF_Broadcast (
    void ) [extern]
```

Broadcasts the contents in the pack buffer on the master to those on the slaves.

Example:

```
if ( PF.me == MASTER ) {
    PF_PreparePack();
    // Packing operations here...
}
PF_Broadcast();
if ( PF.me != MASTER ) {
    // Unpacking operations here...
}
```

Returns

0 if OK, nonzero on error.

Definition at line 883 of file [mpi.c](#).

References [MPI_ERRCODE_CHECK](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastPreDollar\(\)](#), [PF_BroadcastString\(\)](#), and [PF_Init\(\)](#).

4.99.3.13 PF_PrepareLongSinglePack()

```
int PF_PrepareLongSinglePack (
    void ) [extern]
```

Prepares for the next long-single-pack operations on the sender.

Returns

0 if OK, nonzero on error.

Definition at line 1451 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.99.3.14 PF_LongSinglePack()

```
int PF_LongSinglePack (
    const void * buffer,
    size_t count,
    MPI_Datatype type ) [extern]
```

Adds data into the "long single" pack buffer.

Parameters

<i>buffer</i>	the pointer to the buffer storing the data to be packed.
<i>count</i>	the number of elements in the buffer.
<i>type</i>	the data type of elements in the buffer.

Returns

0 if OK, nonzero on error.

Definition at line 1469 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.99.3.15 PF_LongSingleUnpack()

```
int PF_LongSingleUnpack (
    void * buffer,
    size_t count,
    MPI_Datatype type ) [extern]
```

Retrieves the next data in the "long single" pack buffer.

Parameters

out	<i>buffer</i>	the pointer to the buffer to store the unpacked data.
	<i>count</i>	the number of elements of data to be received.
	<i>type</i>	the data type of elements of data to be received.

Returns

0 if OK, nonzero on error.

Definition at line 1503 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.99.3.16 PF_LongSingleSend()

```
int PF_LongSingleSend (
    int to,
    int tag ) [extern]
```

Sends the contents in the "long single" pack buffer to the process specified by *to*.

Example:

```
if ( PF.me == SRC ) {
    PF_PrepareLongSinglePack();
    // Packing operations here...
    PF_LongSingleSend(DEST, TAG);
}
else if ( PF.me == DEST ) {
    PF_LongSingleReceive(SRC, TAG, &actual_src, &actual_tag);
    // Unpacking operations here...
}
```

Parameters

<i>to</i>	the destination process number.
<i>tag</i>	the message tag.

Returns

0 if OK, nonzero on error.

Definition at line 1540 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.99.3.17 PF_LongSingleReceive()

```
int PF_LongSingleReceive (
    int src,
    int tag,
    int * psrc,
    int * ptag ) [extern]
```

Receives data into the "long single" pack buffer from the process specified by *src*. This function allows *&src == psrc* or *&tag == ptag*. Either *psrc* or *ptag* can be NULL.

See the example of [PF_LongSingleSend\(\)](#).

Parameters

	<i>src</i>	the source process number (can be PF_ANY_SOURCE).
	<i>tag</i>	the source message tag (can be PF_ANY_TAG).
out	<i>psrc</i>	the actual source process number of received message.
out	<i>ptag</i>	the received message tag.

Returns

0 if OK, nonzero on error.

Definition at line 1583 of file [mpi.c](#).

Referenced by [PF_CollectModifiedDollars\(\)](#), and [PF_Processor\(\)](#).

4.99.3.18 PF_PrepareLongMultiPack()

```
int PF_PrepareLongMultiPack (
    void ) [extern]
```

Prepares for the next long-multi-pack operations on the sender.

Returns

0 if OK, nonzero on error.

Definition at line 1643 of file [mpi.c](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastCBuf\(\)](#), [PF_BroadcastExpFlags\(\)](#), [PF_BroadcastModifiedDollars\(\)](#), and [PF_BroadcastRedefinedPreVars\(\)](#).

4.99.3.19 PF_LongMultiPackImpl()

```
int PF_LongMultiPackImpl (
    const void * buffer,
    size_t count,
    size_t eSize,
    MPI_Datatype type ) [extern]
```

Adds data into the "long multi" pack buffer.

Parameters

<i>buffer</i>	the pointer to the buffer storing the data to be packed.
<i>count</i>	the number of elements in the buffer.
<i>eSize</i>	the byte size of each element of data.
<i>type</i>	the data type of elements in the buffer.

Returns


0 if OK, nonzero on error.

Definition at line 1662 of file [mpi.c](#).

References [PF_LongMultiPackImpl\(\)](#).

Referenced by [PF_LongMultiPackImpl\(\)](#).

Here is the call graph for this function:

**4.99.3.20 PF_LongMultiUnpackImpl()**

```

int PF_LongMultiUnpackImpl (
    void * buffer,
    size_t count,
    size_t eSize,
    MPI_Datatype type ) [extern]
  
```

Retrieves the next data in the "long multi" pack buffer.

Parameters

out	<i>buffer</i>	the pointer to the buffer to store the unpacked data.
	<i>count</i>	the number of elements of data to be received.
	<i>eSize</i>	the byte size of each element of data.
	<i>type</i>	the data type of elements of data to be received.

Returns


0 if OK, nonzero on error.

Definition at line 1721 of file [mpi.c](#).

References [PF_LongMultiUnpackImpl\(\)](#).

Referenced by [PF_LongMultiUnpackImpl\(\)](#).

Here is the call graph for this function:



4.99.3.21 PF_LongMultiBroadcast()

```
int PF_LongMultiBroadcast (
    void ) [extern]
```

Broadcasts the contents in the "long multi" pack buffer on the master to those on the slaves.

Example:

```
if ( PF.me == MASTER ) {
    PF_PrepareLongMultiPack();
    // Packing operations here...
}
PF_LongMultiBroadcast();
if ( PF.me != MASTER ) {
    // Unpacking operations here...
}
```

Returns

0 if OK, nonzero on error.

Definition at line 1807 of file [mpi.c](#).

Referenced by [Optimize\(\)](#), [PF_BroadcastCBuf\(\)](#), [PF_BroadcastExpFlags\(\)](#), [PF_BroadcastModifiedDollars\(\)](#), and [PF_BroadcastRedefinedPreVars\(\)](#).

4.99.3.22 PF_EndSort()

```
int PF_EndSort (
    void ) [extern]
```

Finishes a master sorting with collecting terms from slaves. Called by [EndSort\(\)](#).

If this is not the masterprocess, just initialize the sendbuffers and return 0, else [PF_EndSort\(\)](#) sends the rest of the terms in the sendbuffer to the next slave and a dummy message to all slaves with tag PF_ENDSORT_MSGTAG. Then it receives the sorted terms, sorts them using a recursive 'tree of losers' ([PF_GetLoser\(\)](#)) and writes them to the outputfile.

Returns

1 if the sorting on the master was done. 0 if [EndSort\(\)](#) still must perform a regular sorting because it is not at the ground level or not on the master or in the sequential mode or in the InParallel mode. -1 if an error occurred.

Remarks

The slaves will send the sorted terms back to the master in the regular sorting (after the initialization of the send buffer in [PF_EndSort\(\)](#)). See [PutOut\(\)](#) and [FlushOut\(\)](#).


This function has been changed such that when it returns 1, AM.S0->TermsLeft is set correctly. But AM.S0->GenTerms is not set: it will be set after collecting the statistics from the slaves at the end of [PF_Processor\(\)](#). (TU 30 Jun 2011)

Definition at line 864 of file [parallel.c](#).

References [FlushOut\(\)](#), and [PutOut\(\)](#).

Referenced by [EndSort\(\)](#).

Here is the call graph for this function:

**4.99.3.23 PF_Deferred()**

```
WORD PF_Deferred (
    WORD * term,
    WORD level ) [extern]
```

Replaces [Deferred\(\)](#) on the slaves.

Parameters

<i>term</i>	the term that must be multiplied by the contents of the current bracket.
<i>level</i>	the compiler level.

Returns


0 if OK, nonzero on error.

Definition at line 1208 of file [parallel.c](#).

References [Generator\(\)](#), and [InsertTerm\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

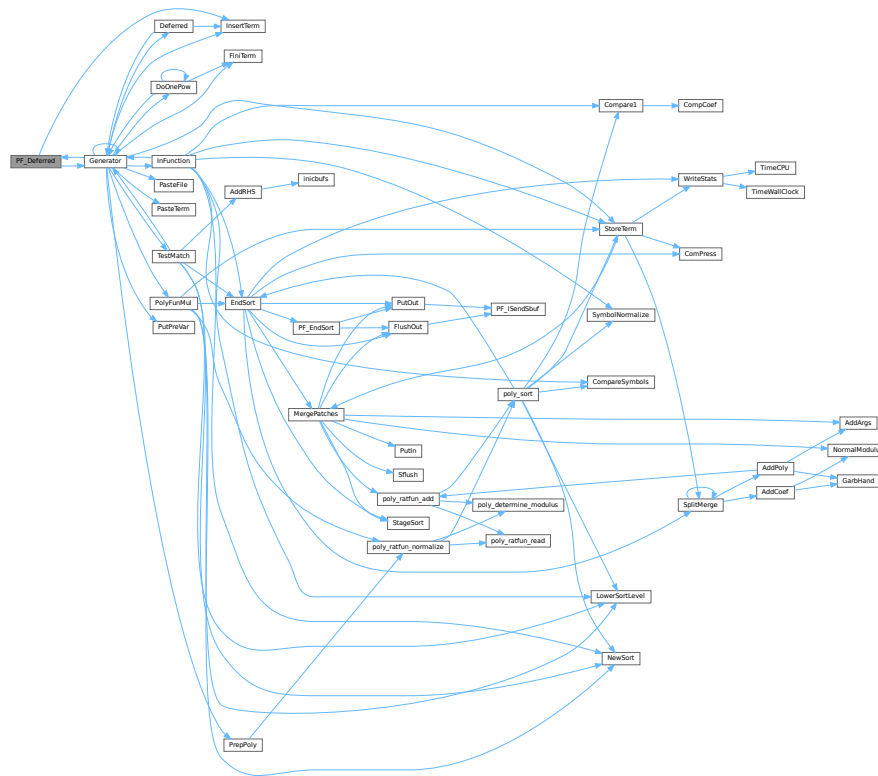

4.99.3.24 PF_Processor()

```
int PF_Processor (
    EXPRESSIONS e,
    WORD i,
    WORD LastExpression ) [extern]
```

Replaces parts of [Processor\(\)](#) on the masters and slaves. On the master [PF_Processor\(\)](#) is responsible for proper distribution of terms from the input file to the slaves. On the slaves it calls [Generator\(\)](#) for all the terms that this process gets, but [PF_GetTerm\(\)](#) gets terms from the master (not directly from infile).

Parameters

<i>e</i>	The pointer to the current expression.
<i>i</i>	The index for the current expression.
<i>LastExpression</i>	The flag indicating whether it is the last expression.

Returns


0 if OK, nonzero on error.

Definition at line 1540 of file [parallel.c](#).

References [EndSort\(\)](#), [Generator\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [PACK_LONG](#), [PF_BroadcastRedefinePreVars\(\)](#), [PF_ISendSbuf\(\)](#), [PF_LongSinglePack\(\)](#), [PF_LongSingleReceive\(\)](#), [PF_LongSingleSend\(\)](#), [PF_LongSingleUnpack\(\)](#), [PF_PrepareLongSinglePack\(\)](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [PutOut\(\)](#), [StoreTerm\(\)](#), [SWAP](#), [TimeCPU\(\)](#), and [WriteStats\(\)](#).

Referenced by [Processor\(\)](#).

Here is the call graph for this function:

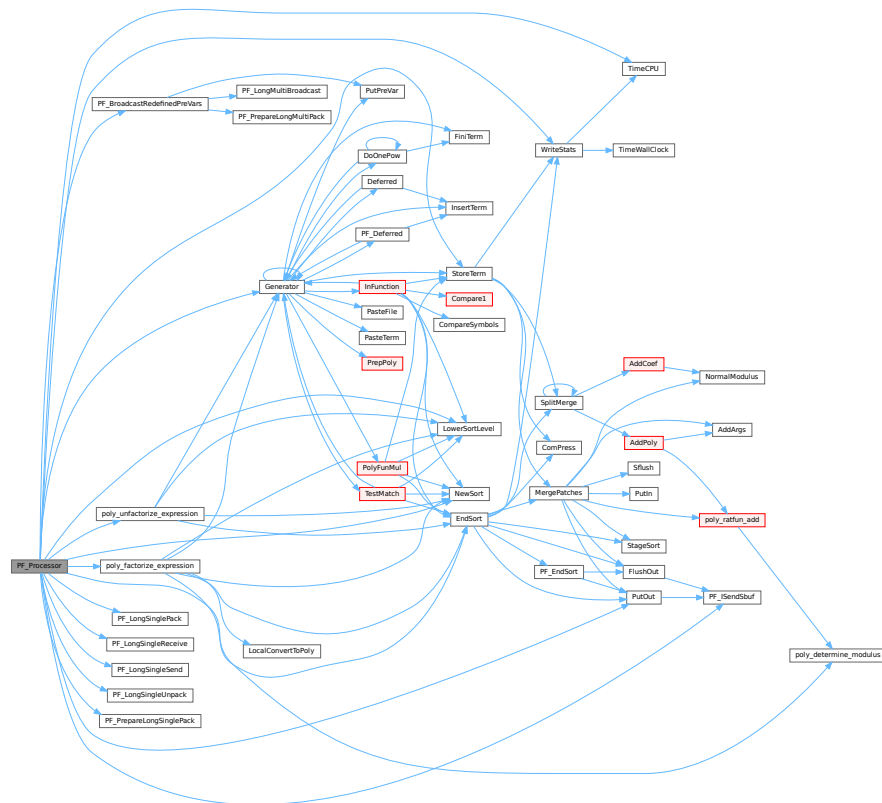

4.99.3.25 PF_Init()

```
int PF_Init (
    int * argc,
    char *** argv ) [extern]
```

All the library independent stuff. [PF_LibInit\(\)](#) should do all library dependent initializations.

Parameters

<i>argc</i>	pointer to the number of arguments.
<i>argv</i>	pointer to the arguments.


Returns

0 if OK, nonzero on error.

Definition at line 1963 of file [parallel.c](#).

References [PF_Broadcast\(\)](#), [PF_LibInit\(\)](#), [PF_Pack\(\)](#), [PF_PreparePack\(\)](#), [PF_RealTime\(\)](#), and [PF_Unpack\(\)](#).

Here is the call graph for this function:

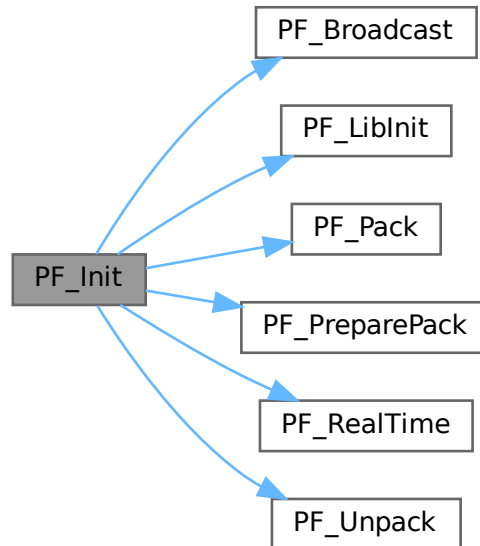

4.99.3.26 PF_Terminate()

```
int PF_Terminate (
    int errorcode ) [extern]
```

Performs the finalization of ParFORM. To be called by `Terminate()`.

Parameters

<i>error</i>	an error code.
--------------	----------------


Returns

0 if OK, nonzero on error.

Definition at line 2058 of file [parallel.c](#).

References [PF_LibTerminate\(\)](#).

Here is the call graph for this function:



4.99.3.27 PF_GetSlaveTimes()

```

LONG PF_GetSlaveTimes (
    void ) [extern]
  
```

Returns the total CPU time of all slaves together. This function must be called on the master and all slaves.

Returns

on the master, the sum of CPU times on all slaves.

Definition at line 2074 of file [parallel.c](#).

References [TimeCPU\(\)](#).

Here is the call graph for this function:



4.99.3.28 PF_BroadcastNumber()

```

LONG PF_BroadcastNumber (
    LONG x ) [extern]
  
```

Broadcasts a LONG value from the master to the all slaves.

Parameters

x	the number to be broadcast (set on the master).
---	---

Returns


the synchronised result.

Definition at line 2094 of file [parallel.c](#).

References [PF_Bcast\(\)](#).

Referenced by [DoCheckpoint\(\)](#), [PF_BroadcastBuffer\(\)](#), and [StartVariables\(\)](#).

Here is the call graph for this function:

**4.99.3.29 PF_BroadcastBuffer()**

```

void PF_BroadcastBuffer (
    WORD ** buffer,
    LONG * length ) [extern]
  
```

Broadcasts a buffer from the master to all the slaves.


Parameters

in, out	<i>buffer</i>	on the master, the buffer to be broadcast. On the slaves, the buffer will be allocated if the length is greater than 0. The caller must free it.
in, out	<i>length</i>	on the master, the length of the buffer to be broadcast. On the slaves, it receives the length of transferred buffer. The actual transfer occurs only if the length is greater than 0.

Definition at line 2121 of file [parallel.c](#).

References [PF_Bcast\(\)](#), and [PF_BroadcastNumber\(\)](#).

Here is the call graph for this function:



4.99.3.30 PF_BroadcastString()

```
int PF_BroadcastString (
    UBYTE * str ) [extern]
```

Broadcasts a string from the master to all slaves.

Parameters

<i>in, out</i>	<i>str</i>	The pointer to a null-terminated string.
----------------	------------	--


Returns

0 if OK, nonzero on error.

Definition at line 2163 of file [parallel.c](#).

References [PF_Broadcast\(\)](#), [PF_PackString\(\)](#), [PF_PreparePack\(\)](#), and [PF_UnpackString\(\)](#).

Here is the call graph for this function:

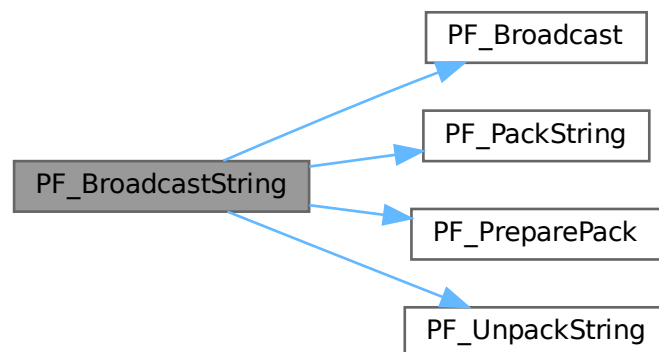

4.99.3.31 PF_BroadcastPreDollar()

```
int PF_BroadcastPreDollar (
    WORD ** dbuffer,
    LONG * newsize,
    int * numterms ) [extern]
```

Broadcasts dollar variables set as a preprocessor variables. Only the master is able to make an assignment like `#$a=g;` where `g` is an expression: only the master has an access to the expression. So, the master broadcasts the result to slaves.

The result is in `*dbuffer` of the size is `*newsize` (in number of WORDs), +1 for trailing zero. For slave `newsize` and `numterms` are output parameters.

Parameters

<i>in, out</i>	<i>dbuffer</i>	the buffer for a dollar variable.
<i>in, out</i>	<i>newsize</i>	the size of the dollar variable in WORDs.
<i>in, out</i>	<i>numterms</i>	the number of terms in the dollar variable.


Returns

0 if OK, nonzero on error.

Definition at line 2218 of file [parallel.c](#).

References [PF_Broadcast\(\)](#), [PF_Pack\(\)](#), [PF_PreparePack\(\)](#), and [PF_Unpack\(\)](#).

Here is the call graph for this function:

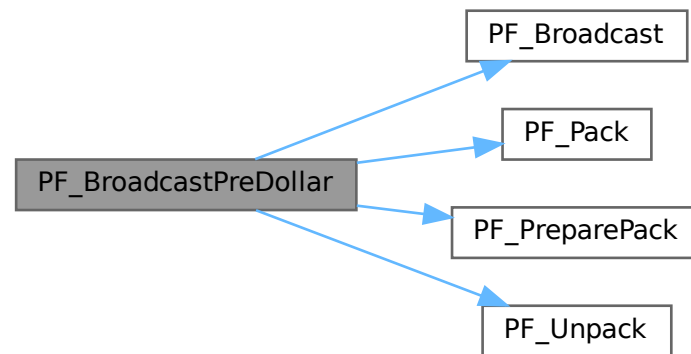

4.99.3.32 PF_CollectModifiedDollars()

```
int PF_CollectModifiedDollars (
    void ) [extern]
```

Combines modified dollar variables on the all slaves, and store them into those on the master.

The potentially modified dollar variables are given in `PotModdollars`, and the number of them is given by `NumPotModdollars`.

The current module could be executed in parallel only if all potentially modified variables are listed in `ModOptdollars`, otherwise the module was switched to the sequential mode.


Returns

0 if OK, nonzero on error.

Definition at line 2505 of file [parallel.c](#).

References [EndSort\(\)](#), [Generator\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [PF_LongSinglePack\(\)](#), [PF_LongSingleReceive\(\)](#), [PF_LongSingleSend\(\)](#), [PF_LongSingleUnpack\(\)](#), [PF_PrepareLongSinglePack\(\)](#), [VectorInit](#), [VectorPtr](#), [VectorReserve](#), and [VectorSize](#).

Here is the call graph for this function:

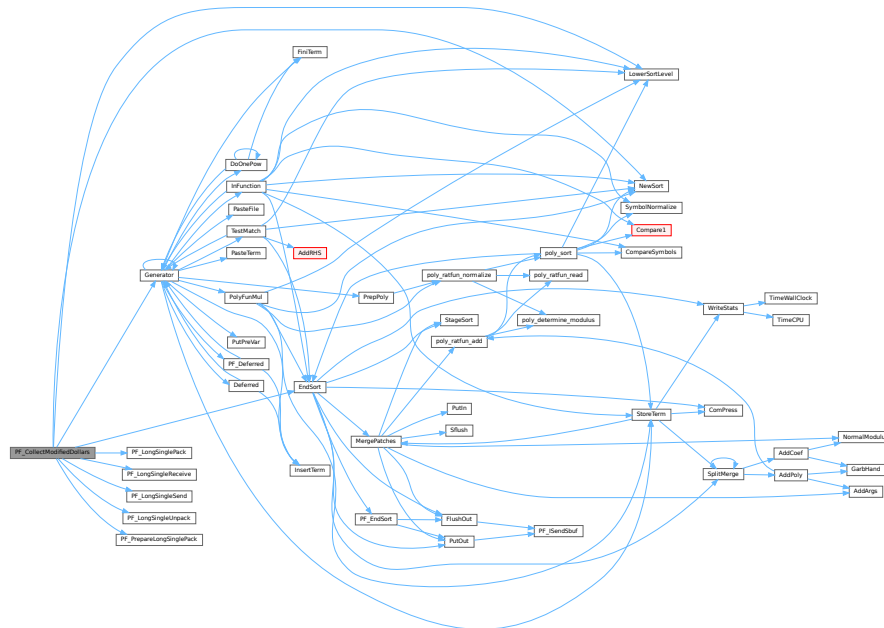

4.99.3.33 PF_BroadcastModifiedDollars()

```
int PF_BroadcastModifiedDollars (
    void ) [extern]
```

Broadcasts modified dollar variables on the master to the all slaves.

The potentially modified dollar variables are given in `PotModdollars`, and the number of them is given by `NumPotModdollars`.

The current module could be executed in parallel only if all potentially modified variables are listed in `ModOptdollars`, otherwise the module was switched to the sequential mode. In either cases, we need to broadcast them.


Returns

0 if OK, nonzero on error.

Definition at line 2784 of file [parallel.c](#).

References [PF_LongMultiBroadcast\(\)](#), and [PF_PrepareLongMultiPack\(\)](#).

Here is the call graph for this function:

**4.99.3.34 PF_BroadcastRedefinedPreVars()**

```
int PF_BroadcastRedefinedPreVars (
    void ) [extern]
```

Broadcasts preprocessor variables, which were changed by the Redefine statements in the current module, from the master to the all slaves.

The potentially redefined preprocessor variables are given in `AC.pfirstnum`, and the number of them is given by `AC.numpfirstnum`. For an actually redefined variable, the corresponding value in `AC.inputnumbers` is non-negative.

Returns


0 if OK, nonzero on error.

Definition at line 3001 of file [parallel.c](#).

References [PF_LongMultiBroadcast\(\)](#), [PF_PrepareLongMultiPack\(\)](#), [PutPreVar\(\)](#), [VectorPtr](#), and [VectorReserve](#).

Referenced by [PF_Processor\(\)](#).

Here is the call graph for this function:

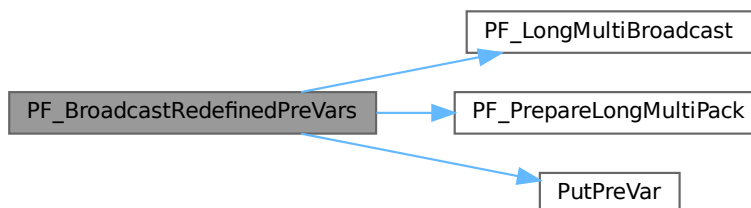

4.99.3.35 PF_BroadcastCBuf()

```
int PF_BroadcastCBuf (
    int bufnum ) [extern]
```

Broadcasts a compiler buffer specified by *bufnum* from the master to the all slaves.

Parameters

<i>bufnum</i>	The index of the compiler buffer to be broadcast.
---------------	---


Returns

0 if OK, nonzero on error.

Definition at line 3143 of file [parallel.c](#).

References [CbUf::boomlijst](#), [CbUf::Buffer](#), [CbUf::BufferSize](#), [CbUf::CanCommu](#), [CbUf::dimension](#), [finishcbuf\(\)](#), [CbUf::lhs](#), [CbUf::numdum](#), [CbUf::NumTerms](#), [PF_LongMultiBroadcast\(\)](#), [PF_PrepareLongMultiPack\(\)](#), [CbUf::Pointer](#), [CbUf::rhs](#), and [CbUf::Top](#).

Here is the call graph for this function:

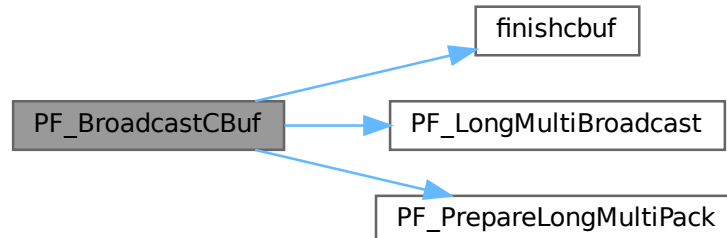

4.99.3.36 PF_BroadcastExpFlags()

```
int PF_BroadcastExpFlags (
    void ) [extern]
```

Broadcasts AR.expflags and several properties of each expression, e.g., `e->vflags`, from the master to all slaves.


Returns

0 if OK, nonzero on error.

Definition at line 3254 of file [parallel.c](#).

References [PF_LongMultiBroadcast\(\)](#), and [PF_PrepareLongMultiPack\(\)](#).

Here is the call graph for this function:

**4.99.3.37 PF_StoreInsideInfo()**

```
int PF_StoreInsideInfo (
    void ) [extern]
```

Definition at line 3091 of file [parallel.c](#).

4.99.3.38 PF_RestoreInsideInfo()

```
int PF_RestoreInsideInfo (
    void ) [extern]
```

Definition at line 3117 of file [parallel.c](#).

4.99.3.39 PF_BroadcastExpr()

```
int PF_BroadcastExpr (
    EXPRESSIONS e,
    FILEHANDLE * file ) [extern]
```

Broadcasts an expression from the master to the all slaves.

Parameters

<i>e</i>	The expression to be broadcast.
<i>file</i>	The file in which the expression is sitting.

Returns

0 if OK, nonzero on error.

Definition at line [3548](#) of file [parallel.c](#).

Referenced by [PF_BroadcastRHS\(\)](#).

4.99.3.40 PF_BroadcastRHS()

```
int PF_BroadcastRHS (  
    void ) [extern]
```

Broadcasts expressions appearing in the right-hand side from the master to the all slaves.

Returns

0 if OK, nonzero on error.

Definition at line [3576](#) of file [parallel.c](#).

References [PF_BroadcastExpr\(\)](#).

Referenced by [Processor\(\)](#).

Here is the call graph for this function:

**4.99.3.41 PF_InParallelProcessor()**

```
int PF_InParallelProcessor (  
    void ) [extern]
```

Processes expressions in the InParallel mode, i.e., dividing expressions marked by `partodo` over the slaves.

Returns

0 if OK, nonzero on error.

Definition at line [3623](#) of file [parallel.c](#).

Referenced by [Processor\(\)](#).

4.99.3.42 PF_SendFile()

```
int PF_SendFile (  
    int to,  
    FILE * fd ) [extern]
```

Sends a file to the process specified by `to`.

Parameters

<i>to</i>	the destination process number.
<i>fd</i>	the file to be sent.

Returns

the size of sent data in bytes, or -1 on error.

Definition at line 4220 of file [parallel.c](#).

References [PF_RawSend\(\)](#).

Referenced by [DoCheckpoint\(\)](#).

Here is the call graph for this function:



4.99.3.43 PF_RecvFile()

```
int PF_RecvFile (
    int from,
    FILE * fd ) [extern]
```

Receives a file from the process specified by *from*.

Parameters

<i>from</i>	the source process number.
<i>fd</i>	the file to save the received data.

Returns

the size of received data in bytes, or -1 on error.

Definition at line 4258 of file [parallel.c](#).

References [PF_RawRecv\(\)](#).

Referenced by [DoCheckpoint\(\)](#).

Here is the call graph for this function:



4.99.3.44 PF_MLock()

```
void PF_MLock (
    void ) [extern]
```

A function called by MLOCK(ErrorMessageLock) for slaves.

Definition at line 4339 of file [parallel.c](#).

References [VectorClear](#).

4.99.3.45 PF_MUnlock()

```
void PF_MUnlock (
    void ) [extern]
```

A function called by MUNLOCK(ErrorMessageLock) for slaves.

Definition at line 4355 of file [parallel.c](#).

References [PF_RawSend\(\)](#), [VectorEmpty](#), [VectorPtr](#), and [VectorSize](#).

Here is the call graph for this function:



4.99.3.46 PF_WriteFileToFile()

```
LONG PF_WriteFileToFile (
    int handle,
    UBYTE * buffer,
    LONG size ) [extern]
```

Replaces WriteFileToFile() on the master and slaves.

It copies the given buffer into internal buffers if called between MLOCK(ErrorMessageLock) and MUNLOCK(ErrorMessageLock) for slaves and handle is StdOut or LogHandle, otherwise calls WriteFileToFile().

Parameters

<i>handle</i>	a file handle that specifies the output.
<i>buffer</i>	a pointer to the source buffer containing the data to be written.
<i>size</i>	the size of data to be written in bytes.

Returns

the actual size of data written to the output in bytes.

Definition at line 4384 of file [parallel.c](#).

References [VectorClear](#), [VectorPtr](#), [VectorPushBacks](#), and [VectorSize](#).

4.99.3.47 PF_FlushStdOutBuffer()

```
void PF_FlushStdOutBuffer (
    void ) [extern]
```

Explicitly Flushes the buffer for the standard output on the master, which is used if PF_ENABLE_STDOUT_↵
BUFFERING is defined.

Definition at line 4478 of file [parallel.c](#).

References [VectorClear](#), [VectorPtr](#), and [VectorSize](#).

4.99.4 Variable Documentation

4.99.4.1 PF

```
PARALLELVARS PF [extern]
```

Definition at line 90 of file [parallel.c](#).

4.99.4.2 PF_maxDollarChunkSize

```
LONG PF_maxDollarChunkSize [extern]
```

Definition at line 69 of file [mpi.c](#).

4.100 parallel.h

[Go to the documentation of this file.](#)

```

00001 #ifndef __PARALLEL__
00002 #define __PARALLEL__
00003
00009 /* #[ License : */
00010 /*
00011 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 * When using this file you are requested to refer to the publication
00013 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 * This is considered a matter of courtesy as the development was paid
00015 * for by FOM the Dutch physics granting agency and we would like to
00016 * be able to track its scientific use to convince FOM of its value
00017 * for the community.
00018 *
00019 * This file is part of FORM.
00020 *
00021 * FORM is free software: you can redistribute it and/or modify it under the
00022 * terms of the GNU General Public License as published by the Free Software
00023 * Foundation, either version 3 of the License, or (at your option) any later
00024 * version.
00025 *
00026 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 * details.
00030 *
00031 * You should have received a copy of the GNU General Public License along
00032 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #[ License : */
00035
00036 /*
00037      #[ macros & definitions :
00038 */
00039 #define MASTER 0
00040
00041 #define PF_RESET 0
00042 #define PF_TIME 1
00043
00044 #define PF_TERM_MSGTAG 10 /* master -> slave: sending terms */
00045 #define PF_ENDSORT_MSGTAG 11 /* master -> slave: no more terms to be distributed, slave ->
master: after EndSort() */
00046 #define PF_DOLLAR_MSGTAG 12 /* slave -> master: sending $-variables */
00047 #define PF_BUFFER_MSGTAG 20 /* slave -> master: sending sorted terms, or in
PF_SendFile()/PF_RecvFile() */
00048 #define PF_ENDBUFFER_MSGTAG 21 /* same as PF_BUFFER_MSGTAG, but indicates the end of operation */
00049 #define PF_READY_MSGTAG 30 /* slave -> master: slave is idle and can accept terms */
00050 #define PF_DATA_MSGTAG 50 /* InParallel, DoCheckpoint() */
00051 #define PF_EMPTY_MSGTAG 52 /* InParallel, DoCheckpoint(), PF_SendFile(), PF_RecvFile() */
00052 #define PF_STDOUT_MSGTAG 60 /* slave -> master: sending text to the stdout */
00053 #define PF_LOG_MSGTAG 61 /* slave -> master: sending text to the log file */
00054 #define PF_OPT_MCTS_MSGTAG 70 /* master <-> slave: optimization */
00055 #define PF_OPT_HORNER_MSGTAG 71 /* master <-> slave: optimization */
00056 #define PF_OPT_COLLECT_MSGTAG 72 /* slave -> master: optimization */
00057 #define PF_MISC_MSGTAG 100
00058
00059 /*
00060 * A macro for checking the version of gcc.
00061 */
00062 #if defined(__GNUC__) && defined(__GNUC_MINOR__) && defined(__GNUC_PATCHLEVEL__)
00063 # define GNUC_PREREQ(major, minor, patchlevel) \
00064     ((__GNUC__ < 16) + ((__GNUC_MINOR__ < 8) + __GNUC_PATCHLEVEL__ >= \
00065     ((major) < 16) + ((minor) < 8) + (patchlevel)))
00066 #else
00067 # define GNUC_PREREQ(major, minor, patchlevel) 0
00068 #endif
00069
00070 /*
00071 * The macro "indices" defined in variable.h collides with some function
00072 * argument names in the MPI-3.0 standard.
00073 */
00074 #undef indices
00075
00076 /* Avoid messy padding warnings which may appear in mpi.h. */
00077 #if GNUC_PREREQ(4, 6, 0)
00078 # pragma GCC diagnostic push
00079 # pragma GCC diagnostic ignored "-Wpadded"
00080 # pragma GCC diagnostic ignored "-Wunused-parameter"
00081 #endif
00082 #if defined(__clang__) && defined(__has_warning)
00083 # pragma clang diagnostic push
00084 # if __has_warning("-Wpadded")
00085 # pragma clang diagnostic ignored "-Wpadded"

```

```

00086 # endif
00087 # if __has_warning("-Wunused-parameter")
00088 # pragma clang diagnostic ignored "-Wunused-parameter"
00089 # endif
00090 #endif
00091
00092 # ifdef __cplusplus
00093 /*
00094  * form3.h (which includes parallel.h) is included from newpoly.h as
00095  * extern "C" {
00096  * #include "form3.h"
00097  * }
00098  * On the other hand, C++ interfaces to MPI are defined in mpi.h if it is
00099  * included from C++ sources. We first leave from the C-linkage, include
00100  * mpi.h, and then go back to the C-linkage.
00101  * (TU 7 Jun 2011)
00102  */
00103 }
00104 # define OMPI_SKIP_MPICXX 1
00105 # include <mpi.h>
00106 extern "C" {
00107 # else
00108 # define OMPI_SKIP_MPICXX 1
00109 # include <mpi.h>
00110 # endif
00111
00112 /* Now redefine "indices" in the same way as in variable.h. */
00113 #define indices ((INDICES)(AC.IndexList.lijst))
00114
00115 /* Restore the warning settings. */
00116 #if GNUC_PREREQ(4, 6, 0)
00117 # pragma GCC diagnostic pop
00118 #endif
00119 #if defined(__clang__) && defined(__has_warning)
00120 # pragma clang diagnostic pop
00121 #endif
00122
00123 # define PF_ANY_SOURCE MPI_ANY_SOURCE
00124 # define PF_ANY_MSGTAG MPI_ANY_TAG
00125 # define PF_COMM MPI_COMM_WORLD
00126 # define PF_BYTE MPI_BYTE
00127 # define PF_INT MPI_INT
00128 #if BITSINWORD == 32
00129 # define PF_WORD MPI_INT32_T
00130 # define PF_LONG MPI_INT64_T
00131 #elif BITSINWORD == 16
00132 # define PF_WORD MPI_INT16_T
00133 # define PF_LONG MPI_INT32_T
00134 #else
00135 # error Can not detect if this is a 32-bit or 64-bit platform.
00136 #endif
00137
00138 /*
00139  #] macros & definitions :
00140  #[ s/r-bufs :
00141  */
00142
00147 typedef struct {
00148     WORD **buff;
00149     WORD **fill;
00150     WORD **full;
00151     WORD **stop;
00152     MPI_Status *status;
00153     MPI_Status *retstat;
00154     MPI_Request *request;
00155     MPI_Datatype *type; /* this is needed in PF_Wait for Get_count */
00156     int *index; /* dummies for returnvalues */
00157     int *tag; /* for the version with blocking send/receives */
00158     int *from;
00159     int numbufs; /* number of cyclic buffers */
00160     int active; /* flag telling which buffer is active */
00161 } PF_BUFFER;
00162
00163 /*
00164  #] s/r-bufs :
00165  #[ global variables used by the PF_functions : need to be known everywhere
00166  */
00167
00168 typedef struct ParallelVars {
00169     FILEHANDLE slavebuf; /* (slave) allocated if there are RHS expressions */
00170     /* special buffers for nonblocking, unbuffered send/receives */
00171     PF_BUFFER *sbuf; /* set of cyclic send buffers for master_and_ slave */
00172     PF_BUFFER **rbufs; /* array of sets of cyclic receive buffers for master */
00173     int me; /* Internal number of task: master is 0 */
00174     int numtasks; /* total number of tasks */
00175     int parallel; /* flags telling the master and slaves to do the sorting parallel */
00176     /* [05nov2003 mt] This flag must be set to 0 in iniModule! */

```

```

00177     int          rhsInParallel; /* flag for parallel executing even if there are RHS expressions */
00178     int          mkSlaveInfile; /* flag tells that slavebuf is used on the slaves */
00179     int          exprbufsize; /* buffer size in WORDs to be used for transferring expressions */
00180     int          exprtodo; /* >= 0: the expression to do in InParallel, -1: otherwise */
00181     int          log; /* flag for logging mode */
00182     WORD         numsbufs; /* number of cyclic send buffers (PF.sbuf->numsbufs) */
00183     WORD         numrbufs; /* number of cyclic receive buffers (PF.rbufs[i]->numsbufs,
                                i=1,...,numtasks-1) */
00184 } PARALLELVARS;
00185
00186 extern PARALLELVARS PF;
00187 /*[04oct2005 mt]:*/
00188 /*for broadcasting dollarvars, see parallel.c:PF_BroadcastPreDollar():*/
00189 extern LONG PF_maxDollarChunkSize;
00190 /*:[04oct2005 mt]*/
00191
00192 /*
00193  #] global variables used by the PF_functions :
00194  #[ Function prototypes :
00195  */
00196
00197 /* mpi.c */
00198 extern int PF_ISendSbuf(int,int);
00199 extern int PF_Bcast(void *buffer, int count);
00200 extern int PF_RawSend(int,void *,LONG,int);
00201 extern LONG PF_RawRecv(int *,void *,LONG,int *);
00202
00203 extern int PF_PreparePack(void);
00204 extern int PF_Pack(const void *buffer, size_t count, MPI_Datatype type);
00205 extern int PF_Unpack(void *buffer, size_t count, MPI_Datatype type);
00206 extern int PF_PackString(const UBYTE *str);
00207 extern int PF_UnpackString(UBYTE *str);
00208 extern int PF_Send(int to, int tag);
00209 extern int PF_Receive(int src, int tag, int *psrc, int *ptag);
00210 extern int PF_Broadcast(void);
00211
00212 extern int PF_PrepareLongSinglePack(void);
00213 extern int PF_LongSinglePack(const void *buffer, size_t count, MPI_Datatype type);
00214 extern int PF_LongSingleUnpack(void *buffer, size_t count, MPI_Datatype type);
00215 extern int PF_LongSingleSend(int to, int tag);
00216 extern int PF_LongSingleReceive(int src, int tag, int *psrc, int *ptag);
00217
00218 extern int PF_PrepareLongMultiPack(void);
00219 extern int PF_LongMultiPackImpl(const void *buffer, size_t count, size_t eSize, MPI_Datatype type);
00220 extern int PF_LongMultiUnpackImpl(void *buffer, size_t count, size_t eSize, MPI_Datatype type);
00221 extern int PF_LongMultiBroadcast(void);
00222
00223 static inline size_t sizeof_datatype(MPI_Datatype type)
00224 {
00225     if ( type == PF_BYTE ) return sizeof(char);
00226     if ( type == PF_INT ) return sizeof(int);
00227     if ( type == PF_WORD ) return sizeof(WORD);
00228     if ( type == PF_LONG ) return sizeof(LONG);
00229     return(0);
00230 }
00231
00232 #define PF_LongMultiPack(buffer, count, type) PF_LongMultiPackImpl(buffer, count,
                                sizeof_datatype(type), type)
00233 #define PF_LongMultiUnpack(buffer, count, type) PF_LongMultiUnpackImpl(buffer, count,
                                sizeof_datatype(type), type)
00234
00235 /* parallel.c */
00236 extern int PF_EndSort(void);
00237 extern WORD PF_Deferred(WORD *,WORD);
00238 extern int PF_Processor(EXPRESSIONS,WORD,WORD);
00239 extern int PF_Init(int*,char ***);
00240 extern int PF_Terminate(int);
00241 extern LONG PF_GetSlaveTimes(void);
00242 extern LONG PF_BroadcastNumber(LONG);
00243 extern void PF_BroadcastBuffer(WORD **buffer, LONG *length);
00244 extern int PF_BroadcastString(UBYTE *);
00245 extern int PF_BroadcastPreDollar(WORD **, LONG *,int *);
00246 extern int PF_CollectModifiedDollars(void);
00247 extern int PF_BroadcastModifiedDollars(void);
00248 extern int PF_BroadcastRedefinedPreVars(void);
00249 extern int PF_BroadcastCBuf(int bufnum);
00250 extern int PF_BroadcastExpFlags(void);
00251 extern int PF_StoreInsideInfo(void);
00252 extern int PF_RestoreInsideInfo(void);
00253 extern int PF_BroadcastExpr(EXPRESSIONS e, FILEHANDLE *file);
00254 extern int PF_BroadcastRHS(void);
00255 extern int PF_InParallelProcessor(void);
00256 extern int PF_SendFile(int to, FILE *fd);
00257 extern int PF_RecvFile(int from, FILE *fd);
00258 extern void PF_MLock(void);
00259 extern void PF_MUnLock(void);
00260 extern LONG PF_WriteFileToFile(int,UBYTE *,LONG);

```

```


00261 extern void   PF_FlushStdOutBuffer(void);
00262
00263 /*
00264  #] Function prototypes :
00265  */
00266
00267 #endif

```

4.101 pattern.c File Reference

```
#include "form3.h"
```

Include dependency graph for pattern.c:

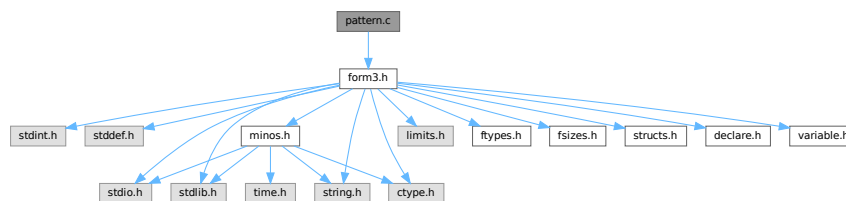

Macros

- `#define` [PutInBuffers](#)(pow)

Functions

- `int` [TestMatch](#) (PHEAD WORD *term, WORD *level)
- `void` [Substitute](#) (PHEAD WORD *term, WORD *pattern, WORD power)
- `int` [FindAll](#) (PHEAD WORD *term, WORD *pattern, WORD level, WORD *par)
- `int` [TestSelect](#) (WORD *term, WORD *setp)
- `void` [SubsInAll](#) (PHEAD0)
- `void` [TransferBuffer](#) (int from, int to, int spectator)
- `int` [TakeIDfunction](#) (PHEAD WORD *term)

4.101.1 Detailed Description

Top level pattern matching routines. More pattern matching is found in [findpat.c](#), [function.c](#), [symmetr.c](#) and [smart.c](#). The last three files contain the matching inside functions. The file [pattern.c](#) contains also the very important routine `Substitute`. All regular pattern matching is just the finding of the pattern and indicating what are the wildcards etc. The routine `Substitute` does the actual removal of the pattern and replaces it by a subterm of the type SUBEXPRESSION.

Definition in file [pattern.c](#).

4.101.2 Macro Definition Documentation

4.101.2.1 PutInBuffers

```
#define PutInBuffers(
    pow )
```

Value:

```
AddRHS(AT.ebufnum,1); \
*out++ = SUBEXPRESSION; \
*out++ = SUBEXPSIZE; \
*out++ = C->numrhs; \
*out++ = pow; \
*out++ = AT.ebufnum; \
FILLSUB(out) \
r = AT.pWorkSpace[rhs+i]; \
if ( *r > 0 ) { \
    oldinr = r[*r]; r[*r] = 0; \
    AddNtoC(AT.ebufnum, (*r+1-ARGHEAD), (r+ARGHEAD), 14); \
    r[*r] = oldinr; \
} \
else { \
    ToGeneral(r,buffer,1); \
    buffer[buffer[0]] = 0; \
    AddNtoC(AT.ebufnum,buffer[0]+1,buffer,15); \
}
```

Definition at line 2193 of file [pattern.c](#).

4.101.3 Function Documentation

4.101.3.1 TestMatch()

```
int TestMatch (
    PHEAD WORD * term,
    WORD * level )
```

This routine governs the pattern matching. If it decides that a substitution should be made, this can be either the insertion of a right hand side (C->rhs) or the automatic generation of terms as a result of an operation (like trace). The object to be replaced is removed from term and a subexpression pointer is inserted. If the substitution is made more than once there can be more subexpression pointers. Its number is positive as it corresponds to the level at which the C->rhs can be found in the compiler output. The subexpression pointer contains the wildcard substitution information. The power is found in *AT.TMout. For operations the subexpression pointer is negative and corresponds to an address in the array AT.TMout. In this array are then the instructions for the routine to be called and its number in the array 'Operations' The format is here: length,functionnumber,length-2 parameters


There is a certain complexity wrt repeat levels. Another complication is the poking of the wildcard values in the subexpression prototype in the compiler buffer. This was how things were done in the past with sequential FORM, but with the advent of TFORM this cannot be maintained. Now, for TFORM we make a copy of it. 7-may-2008 (JV): We cannot yet guarantee that this has been done 100% correctly. There are errors that occur in TFORM only and that may indicate problems.

Definition at line 97 of file [pattern.c](#).

References [AddRHS\(\)](#), [EndSort\(\)](#), [Generator\(\)](#), [CbUf::lhs](#), [LowerSortLevel\(\)](#), and [NewSort\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

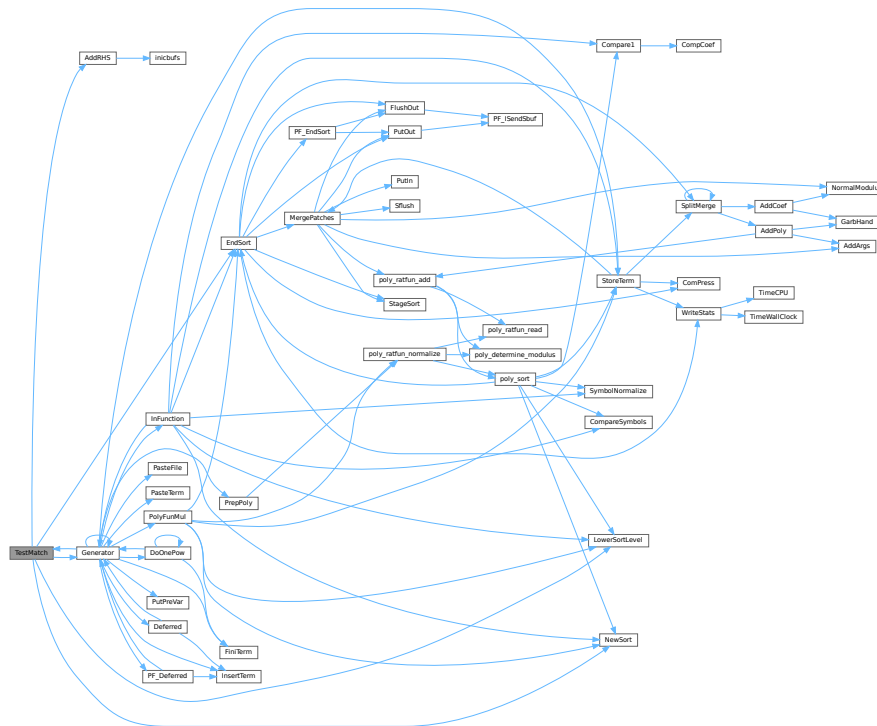

4.101.3.2 Substitute()

```
void Substitute (
    PHEAD WORD * term,
    WORD * pattern,
    WORD power )
```

Definition at line 641 of file [pattern.c](#).

4.101.3.3 FindAll()

```
int FindAll (
    PHEAD WORD * term,
    WORD * pattern,
    WORD level,
    WORD * par )
```

Definition at line 1197 of file [pattern.c](#).

4.101.3.4 TestSelect()

```
int TestSelect (
    WORD * term,
    WORD * setp )
```

Definition at line 1748 of file [pattern.c](#).

4.101.3.5 SubsInAll()

```
void SubsInAll (
    PHEAD0 )
```

Definition at line 1982 of file [pattern.c](#).

4.101.3.6 TransferBuffer()

```
void TransferBuffer (
    int from,
    int to,
    int spectator )
```

Definition at line 2143 of file [pattern.c](#).

4.101.3.7 TakeIDfunction()

```
int TakeIDfunction (
    PHEAD WORD * term )
```

Definition at line 2213 of file [pattern.c](#).

4.102 pattern.c

[Go to the documentation of this file.](#)

```
00001
00012 /* #[] License : */
00013 /*
00014 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00015 * When using this file you are requested to refer to the publication
00016 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00017 * This is considered a matter of courtesy as the development was paid
00018 * for by FOM the Dutch physics granting agency and we would like to
00019 * be able to track its scientific use to convince FOM of its value
00020 * for the community.
00021 *
00022 * This file is part of FORM.
00023 *
00024 * FORM is free software: you can redistribute it and/or modify it under the
00025 * terms of the GNU General Public License as published by the Free Software
00026 * Foundation, either version 3 of the License, or (at your option) any later
00027 * version.
00028 *
00029 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00030 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00031 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00032 * details.
00033 *
00034 * You should have received a copy of the GNU General Public License along
00035 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00036 */
00037 /* #[] License : */
00038 /*
00039 !!! Notice the change in OnePV in FindAll (7-may-2008 JV).
00040
00041 #[] Includes : pattern.c
00042 */
00043
00044 #include "form3.h"
00045
00046 /*
00047 #[] Includes :
00048 #[] Patterns :
00049 #[] Rules :
```

```

00050
00051     There are several rules governing the allowable replacements.
00052     1: Multi with anything but symbols or dotproducts reverts
00053         to many.
00054     2: Each symbol can have only one (wildcard) power, so
00055         x^2*x^n? is illegal.
00056     3: when a single vector is used it replaces all occurrences
00057         of the vector. Therefore q*q(mu) or q*q(mu) cannot occur.
00058         Also q*q cannot be done.
00059     4: Loose vector elements are replaced with p(mu), dotproducts
00060         with p?.q.
00061     5: p?.q? is allowed.
00062     6: x^n? can revert to n = 0 if there is no power of x.
00063     7: x?^n? must match some x. There could be an ambiguity otherwise.
00064
00065     #] Rules :
00066     #[ TestMatch :          WORD TestMatch(term,level)
00067 */
00068
00097 int TestMatch(PHEAD WORD *term, WORD *level)
00098 {
00099     GETBIDENTITY
00100     WORD *ll, *m, *w, *llf, *OldWork, *StartWork, *ww, *mm, *t, *OldTermBuffer = 0;
00101     WORD power = 0, i, msign = 0, ll2;
00102     int match = 0;
00103     int numdollars = 0, protosize, oldallnumrhs;
00104     CBUF *C = cbuf+AM.rbufnum, *CC;
00105     AT.idallflag = 0;
00106     do {
00107 /*
00108         #] Preliminaries :
00109 */
00110         ll = C->lhs[*level];
00111         if ( *ll == TYPEEXPRESSION ) {
00112 /*
00113             Expressions are not subject to anything.
00114 */
00115             return(0);
00116         }
00117         else if ( *ll == TYPEREPEAT ) {
00118             ***AN.RepPoint = 0;
00119             return(0); /* Will force the next level */
00120         }
00121         else if ( *ll == TYPEENDREPEAT ) {
00122             if ( *AN.RepPoint ) {
00123                 AN.RepPoint[-1] = 1; /* Mark the higher level as dirty */
00124                 *AN.RepPoint = 0;
00125                 *level = ll[2]; /* Level to jump back to */
00126             }
00127             else {
00128                 AN.RepPoint--;
00129                 if ( AN.RepPoint < AT.RepCount ) {
00130                     MLOCK(ErrorMessageLock);
00131                     MesPrint("Internal problems with REPEAT count");
00132                     MUNLOCK(ErrorMessageLock);
00133                     Terminate(-1);
00134                 }
00135             }
00136             return(0); /* Force the next level */
00137         }
00138         else if ( *ll == TYPEOPERATION ) {
00139 /*
00140             Operations have always their own level.
00141 */
00142             if ( (*(FG.OperaFind[ll[2]]))(BHEAD term,ll) ) return(-1);
00143             else return(0);
00144         }
00145 /*
00146         #] Preliminaries :
00147 */
00148         OldWork = AT.WorkPointer;
00149         if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
00150         ww = AT.WorkPointer;
00151 /*
00152         Here we need to make a copy of the subexpression object because we
00153         will be writing the values of the wildcards in it.
00154         Originally we copied it into the private version of the compiler buffer
00155         that is used for scratch space (ebufnum). This caused errors in the
00156         routines like ScanFunctions when the ebufnum Buffer was expanded
00157         and inpat was still pointing at the old Buffer. This expansion
00158         could be done in AddWild and hence cannot be fixed at > 100 places.
00159         The solution is to use AN.patternbuffer (JV 16-mar-2009).
00160 */
00161         {
00162             WORD *ta = ll, *ma;
00163             int ja = ta[1];
00164 /*

```

```

00165         New code (16-mar-2009) JV
00166     */
00167     if ( ( ja + 2 ) > AN.patternbuffersize ) {
00168         if ( AN.patternbuffer ) M_free(AN.patternbuffer,"AN.patternbuffer");
00169         AN.patternbuffersize = 2 * ja + 2;
00170         AN.patternbuffer = (WORD *)Malloc1(AN.patternbuffersize * sizeof(WORD),
00171             "AN.patternbuffer");
00172     }
00173     ma = AN.patternbuffer;
00174     m = ma + IDHEAD;
00175     NCOPY(ma,ta,ja);
00176     *ma = 0;
00177 }
00178 AN.FullProto = m;
00179 AN.WildValue = w = m + SUBEXPSIZE;
00180 protosize = IDHEAD + m[1];
00181 m += m[1];
00182 AN.WildStop = m;
00183 StartWork = ww;
00184 ll2 = ll[2];
00185 /*
00186     #! Expand dollars :
00187 */
00188 if ( ( ll[4] & DOLLARFLAG ) != 0 ) { /* We have at least one dollar in the pattern */
00189     WORD oldRepPoint = *AN.RepPoint, olddefer = AR.DeferFlag;
00190     AR.Eside = LHSIDEX;
00191 /*
00192     Copy into WorkSpace. This means that AN.patternbuffer will be free.
00193 */
00194     ww = AT.WorkPointer; i = m[0]; mm = m;
00195     NCOPY(ww,mm,i);
00196     *StartWork += 3;
00197     *ww++ = 1; *ww++ = 1; *ww++ = 3;
00198     AT.WorkPointer = ww;
00199     AR.DeferFlag = 0;
00200     NewSort(BHEAD0);
00201     if ( Generator(BHEAD StartWork,AR.Cnumlhs) ) {
00202         LowerSortLevel();
00203         AT.WorkPointer = OldWork;
00204         AR.DeferFlag = olddefer;
00205         return(-1);
00206     }
00207     AT.WorkPointer = ww;
00208     if ( EndSort(BHEAD ww,0) < 0 ) {}
00209     AR.DeferFlag = olddefer;
00210     if ( *ww == 0 || *(ww+ww) != 0 ) {
00211         if ( AP.lhdollarerror == 0 ) {
00212 /*
00213             If race condition we just get more error messages
00214 */
00215             MLOCK(ErrorMessageLock);
00216             MesPrint("&LHS must be one term");
00217             MUNLOCK(ErrorMessageLock);
00218             AP.lhdollarerror = 1;
00219         }
00220         AT.WorkPointer = OldWork;
00221         return(-1);
00222     }
00223     m = ww; ww = m + *m;
00224     if ( m[*m-1] < 0 ) { msign = 1; m[*m-1] = -m[*m-1]; }
00225     if ( *ww || m[*m-1] != 3 || m[*m-2] != 1 || m[*m-3] != 1 ) {
00226         MLOCK(ErrorMessageLock);
00227         MesPrint("Dollar variable develops into an illegal pattern in id-statement");
00228         MUNLOCK(ErrorMessageLock);
00229         return(-1);
00230     }
00231     *m -= m[*m-1];
00232     if ( ( *m + 1 + protosize ) > AN.patternbuffersize ) {
00233         if ( AN.patternbuffer ) M_free(AN.patternbuffer,"AN.patternbuffer");
00234         AN.patternbuffersize = 2 * (*m) + 2 + protosize;
00235         AN.patternbuffer = (WORD *)Malloc1(AN.patternbuffersize * sizeof(WORD),
00236             "AN.patternbuffer");
00237         mm = ll; ww = AN.patternbuffer; i = protosize;
00238         NCOPY(ww,mm,i);
00239         AN.FullProto = AN.patternbuffer + IDHEAD;
00240         AN.WildValue = w = AN.FullProto + SUBEXPSIZE;
00241         AN.WildStop = AN.patternbuffer + protosize;
00242     }
00243     mm = AN.patternbuffer + protosize;
00244     i = *m;
00245     NCOPY(mm,m,i);
00246     m = AN.patternbuffer + protosize;
00247     AR.Eside = RHSIDE;
00248     *mm = 0;
00249 /*
00250     Test the pattern. If only wildcard powers -> SUBONCE
00251 */

```

```

00252     {
00253         WORD *mmm = m + *m, *m1 = m+1, jm, noveto = 0;
00254         while ( m1 < mmm ) {
00255             if ( *m1 == SYMBOL ) {
00256                 for ( jm = 2; jm < m1[1]; jm+=2 ) {
00257                     if ( m1[jm+1] < MAXPOWER && m1[jm+1] > -MAXPOWER ) break;
00258                 }
00259                 if ( jm < m1[1] ) { noveto = 1; break; }
00260             }
00261             else if ( *m1 == DOTPRODUCT ) {
00262                 for ( jm = 2; jm < m1[1]; jm+=3 ) {
00263                     if ( m1[jm+2] < MAXPOWER && m1[jm+2] > -MAXPOWER ) break;
00264                 }
00265                 if ( jm < m1[1] ) { noveto = 1; break; }
00266             }
00267             else { noveto = 1; break; }
00268             m1 += m1[1];
00269         }
00270         if ( noveto == 0 ) {
00271             ll2 = ll2 & ~SUBMASK;
00272             ll2 |= SUBONCE;
00273         }
00274     }
00275     AT.WorkPointer = ww = StartWork;
00276     *AN.RepPoint = oldRepPoint;
00277 }
00278 /*
00279     #] Expand dollars :
00280
00281     In case of id,all we have to check at this point that there are only
00282     functions in the pattern.
00283 */
00284 if ( ( ll2 & SUBMASK ) == SUBALL ) {
00285     WORD *t = AN.patternbuffer+IDHEAD, *tt;
00286     WORD *tstop, *ttstop, ii;
00287     t += t[1]; tstop = t + *t; t++;
00288     while ( t < tstop ) {
00289         if ( *t < FUNCTION ) break;
00290         t += t[1];
00291     }
00292     if ( t < tstop ) {
00293         MLOCK(ErrorMessageLock);
00294         MesPrint("Error: id,all can only be used with (products of) functions and/or tensors.");
00295         MUNLOCK(ErrorMessageLock);
00296         return(-1);
00297     }
00298     OldTermBuffer = AN.termbuffer;
00299     AN.termbuffer = TermMalloc("id,all");
00300 /*
00301     Now make sure that only regular functions and tensors can take part.
00302 */
00303     tt = term; ttstop = tt+*tt; ttstop -= ABS(ttstop[-1]); tt++;
00304     t = AN.termbuffer+1;
00305     while ( tt < ttstop ) {
00306         if ( *tt >= FUNCTION && *tt != AR.PolyFun && *tt != AR.PolyFunInv ) {
00307             ii = tt[1]; NCOPY(t,tt,ii);
00308         }
00309         else tt += tt[1];
00310     }
00311     *t++ = 1; *t++ = 1; *t++ = 3; AN.termbuffer[0] = t-AN.termbuffer;
00312 }
00313 /*
00314     To be puristic, we need to check that all wildcards in the prototype
00315     are actually present. If the LHS contained a replace_ this may not be
00316     the case.
00317 */
00318 ClearWild(BHEAD0);
00319 while ( w < AN.WildStop ) {
00320     if ( *w == LOADDOLLAR ) numdollars++;
00321     w += w[1];
00322 }
00323 AN.RepFunNum = 0;
00324 /* rep = */ AN.RepFunList = AT.WorkPointer;
00325 AT.WorkPointer = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer/2;
00326 if ( AT.WorkPointer >= AT.WorkTop ) {
00327     MLOCK(ErrorMessageLock);
00328     MesWork();
00329     MUNLOCK(ErrorMessageLock);
00330     return(-1);
00331 }
00332 AN.DisOrderFlag = ll2 & SUBDISORDER;
00333 AN.nogroundlevel = 0;
00334 switch ( ll2 & SUBMASK ) {
00335     case SUBONLY :
00336         /* Must be an exact match */
00337         AN.UseFindOnly = 1; AN.ForFindOnly = 0;
00338         if ( FindRest(BHEAD term,m) && ( AN.UsedOtherFind ||

```

```

00339         FindOnly(BHEAD term,m) ) ) {
00340             power = 1;
00341             if ( msign ) term[term[0]-1] = -term[term[0]-1];
00342         }
00343         else power = 0;
00344         break;
00345     case SUBMANY :
00346         AN.UseFindOnly = -1;
00347         if ( ( power = FindRest(BHEAD term,m) ) > 0 ) {
00348             if ( ( power = FindOnce(BHEAD term,m) ) > 0 ) {
00349                 AN.UseFindOnly = 0;
00350                 do {
00351                     if ( msign ) term[term[0]-1] = -term[term[0]-1];
00352                     Substitute(BHEAD term,m,1);
00353                     if ( numdollars ) {
00354                         WildDollars(BHEAD (WORD *)0);
00355                         numdollars = 0;
00356                     }
00357                     if ( ww < term+term[0] ) ww = term+term[0];
00358                     ClearWild(BHEAD0);
00359                     AT.WorkPointer = ww;
00360                     /* if ( rep < ww ) { */
00361                         AN.RepFunNum = 0;
00362                         /* rep = */ AN.RepFunList = ww;
00363                         AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer/2);
00364                         if ( AT.WorkPointer >= AT.WorkTop ) {
00365                             MLOCK(ErrorMessageLock);
00366                             MesWork();
00367                             MUNLOCK(ErrorMessageLock);
00368                             return(-1);
00369                         }
00370                     /*
00371                 }
00372                 else {
00373                     AN.RepFunList = rep;
00374                     AN.RepFunNum = 0;
00375                 }
00376             */
00377                 AN.nogroundlevel = 0;
00378             } while ( FindRest(BHEAD term,m) && ( AN.UsedOtherFind ||
00379                 FindOnce(BHEAD term,m) ) );
00380             match = 1;
00381         }
00382         else if ( power < 0 ) {
00383             do {
00384                 if ( msign ) term[term[0]-1] = -term[term[0]-1];
00385                 Substitute(BHEAD term,m,1);
00386                 if ( numdollars ) {
00387                     WildDollars(BHEAD (WORD *)0);
00388                     numdollars = 0;
00389                 }
00390                 if ( ww < term+term[0] ) ww = term+term[0];
00391                 ClearWild(BHEAD0);
00392                 AT.WorkPointer = ww;
00393                 /* if ( rep < ww ) { */
00394                     AN.RepFunNum = 0;
00395                     /* rep = */ AN.RepFunList = ww;
00396                     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer/2);
00397                     if ( AT.WorkPointer >= AT.WorkTop ) {
00398                         MLOCK(ErrorMessageLock);
00399                         MesWork();
00400                         MUNLOCK(ErrorMessageLock);
00401                         return(-1);
00402                     }
00403                 /*
00404             }
00405             else {
00406                 AN.RepFunList = rep;
00407                 AN.RepFunNum = 0;
00408             }
00409         */
00410             } while ( FindRest(BHEAD term,m) );
00411             match = 1;
00412         }
00413     }
00414     else if ( power < 0 ) {
00415         if ( FindOnce(BHEAD term,m) ) {
00416             do {
00417                 if ( msign ) term[term[0]-1] = -term[term[0]-1];
00418                 Substitute(BHEAD term,m,1);
00419                 if ( numdollars ) {
00420                     WildDollars(BHEAD (WORD *)0);
00421                     numdollars = 0;
00422                 }
00423                 if ( ww < term+term[0] ) ww = term+term[0];
00424                 ClearWild(BHEAD0);
00425                 AT.WorkPointer = ww;

```

```

00426 /*                      if ( rep < ww ) { */
00427                          AN.RepFunNum = 0;
00428                          /* rep = */ AN.RepFunList = ww;
00429                          AT.WorkPointer = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer/2;
00430                          if ( AT.WorkPointer >= AT.WorkTop ) {
00431                              MLOCK(ErrorMessageLock);
00432                              MesWork();
00433                              MUNLOCK(ErrorMessageLock);
00434                              return(-1);
00435                          }
00436 /*                      }
00437                          }
00438                          else {
00439                              AN.RepFunList = rep;
00440                              AN.RepFunNum = 0;
00441                          }
00442 /*                      */
00443                          } while ( FindOnce(BHEAD term,m) );
00444                          match = 1;
00445                      }
00446                  }
00447                  if ( match ) {
00448                      if ( ( ll2 & SUBAFTER ) != 0 ) *level = AC.Labels[ll[3]];
00449                  }
00450                  else {
00451                      if ( ( ll2 & SUBAFTERNOT ) != 0 ) *level = AC.Labels[ll[3]];
00452                  }
00453                  goto nextlevel;
00454              case SUBONCE :
00455                  AN.UseFindOnly = 0;
00456                  if ( FindRest(BHEAD term,m) && ( AN.UsedOtherFind || FindOnce(BHEAD term,m) ) ) {
00457                      power = 1;
00458                      if ( msign ) term[term[0]-1] = -term[term[0]-1];
00459                  }
00460                  else power = 0;
00461                  break;
00462              case SUBMULTI :
00463                  power = FindMulti(BHEAD term,m);
00464                  if ( ( power & 1 ) != 0 && msign ) term[term[0]-1] = -term[term[0]-1];
00465                  break;
00466              case SUBVECTOR :
00467                  while ( ( power = FindAll(BHEAD term,m,*level,(WORD *)0) ) != 0 ) {
00468                      if ( ( power & 1 ) != 0 && msign ) term[term[0]-1] = -term[term[0]-1];
00469                      match = 1;
00470                  }
00471                  break;
00472              case SUBSELECT :
00473                  llf = ll + IDHEAD; llf += llf[1]; llf += *llf;
00474                  AN.UseFindOnly = 1; AN.ForFindOnly = llf;
00475                  if ( FindRest(BHEAD term,m) && ( AN.UsedOtherFind || FindOnly(BHEAD term,m) ) ) {
00476                      if ( msign ) term[term[0]-1] = -term[term[0]-1];
00477 /*                      The following code needs to be hacked a bit to allow for
00478                          all types of sets and for occurrence anywhere in the term
00479                          The code at the end of FindOnly is a bit mysterious.
00481 /*                      if ( llf[1] > 2 ) {
00482                          WORD *t1, *t2;
00483                          if ( *term > AN.sizeselecttermundo ) {
00484                              if ( AN.selecttermundo ) M_free(AN.selecttermundo,"AN.selecttermundo");
00485                              AN.sizeselecttermundo = *term +10;
00486                              AN.selecttermundo = (WORD *)Malloc1(
00487                                  AN.sizeselecttermundo*sizeof(WORD),"AN.selecttermundo");
00489                          }
00490                          t1 = term; t2 = AN.selecttermundo; i = *term;
00491                          NCOPY(t2,t1,i);
00492                      }
00493                      power = 1;
00494                      Substitute(BHEAD term,m,power);
00495                      if ( llf[1] > 2 ) {
00496                          if ( TestSelect(term,llf) ) {
00497                              WORD *t1, *t2;
00498                              power = 0;
00499                              t1 = term; t2 = AN.selecttermundo; i = *t2;
00500                              NCOPY(t1,t2,i);
00501 #if IDHEAD > 3
00502                              if ( ( ll2 & SUBAFTERNOT ) != 0 ) {
00503                                  *level = AC.Labels[ll[3]];
00504                              }
00505 #endif
00506                              goto nextlevel;
00507                          }
00508                      }
00509                      if ( numdollars ) {
00510                          WildDollars(BHEAD (WORD *)0);
00511                          numdollars = 0;
00512                      }

```

```

00513         match = 1;
00514         if ( ( ll2 & SUBAFTER ) != 0 ) {
00515             *level = AC.Labels[ll[3]];
00516         }
00517     }
00518     else {
00519         if ( ( ll2 & SUBAFTERNOT ) != 0 ) {
00520             *level = AC.Labels[ll[3]];
00521         }
00522         power = 0;
00523     }
00524     goto nextlevel;
00525 case SUBALL:
00526     AN.UseFindOnly = 0;
00527     CC = cbuf+AT.allbufnum;
00528     oldallnumrhs = CC->numrhs;
00529     t = AddRHS(AT.allbufnum,1);
00530     *t = 0;
00531     AT.idallflag = 1;
00532     AT.idallmaxnum = ll[5];
00533     AT.idallnum = 0;
00534     if ( FindRest(BHEAD AN.termbuffer,m) || AT.idallflag > 1 ) {
00535         WORD *t, *tstop, *tt, first = 1, ii;
00536         power = 1;
00537         *CC->Pointer++ = 0;
00538         if ( msign ) term[term[0]-1] = -term[term[0]-1];
00539     /*
00540
00541         If we come here the matches are all already in the
00542         compiler buffer. All we need to do is take out all
00543         functions and replace them by a SUBEXPRESSION that
00544         points to this buffer.
00545         Note: the PolyFun/PolyRatFun should be excluded from this.
00546         This works because each match writes incrementally to
00547         the buffer using the routine SubsInAll.
00548
00549         The call to WildDollars should be made in Generator.....
00550     */
00551     t = term; tstop = t + *t; ii = ABS(tstop[-1]); tstop -= ii;
00552     tt = AT.WorkPointer+1;
00553     t++;
00554     while ( t < tstop ) {
00555         if ( *t >= FUNCTION && *t != AR.PolyFun && *t != AR.PolyFunInv ) {
00556             if ( first ) { /* SUBEXPRESSION */
00557                 *tt++ = SUBEXPRESSION;
00558                 *tt++ = SUBEXPSIZE;
00559                 *tt++ = CC->numrhs;
00560                 *tt++ = 1;
00561                 *tt++ = AT.allbufnum;
00562                 FILLSUB(tt)
00563                 first = 0;
00564             }
00565             t += t[1];
00566         }
00567         else {
00568             i = t[1]; NCOPY(tt,t,i);
00569         }
00570     }
00571     if ( ( ll[4] & NORMALIZEFLAG ) != 0 ) {
00572     /*
00573
00574         In case of the normalization option, we have to divide
00575         by AT.idallnum;
00576
00577         WORD na = t[ii-1];
00578         na = REDLENG(na);
00579         for ( i = 0; i < ii; i++ ) tt[i] = t[i];
00580         Divvy(BHEAD (UWORD *)tt,&na,(UWORD *)&(AT.idallnum),1);
00581         na = INCLENG(na);
00582         ii = ABS(na);
00583         tt[ii-1] = na;
00584         tt += ii;
00585     */
00586     }
00587     else {
00588         NCOPY(tt,t,ii);
00589     }
00590     ii = tt-AT.WorkPointer;
00591     *(AT.WorkPointer) = ii;
00592     tt = AT.WorkPointer; t = term;
00593     NCOPY(t,tt,ii);
00594
00595     if ( ( ll2 & SUBAFTER ) != 0 ) { /* ifmatch -> */
00596         *level = AC.Labels[ll[3]];
00597     }
00598     TermFree(AN.termbuffer,"id,all");
00599     AN.termbuffer = OldTermBuffer;
00600     AT.WorkPointer = AN.RepFunList;
00601     AT.idallflag = 0;
00602     CC->Pointer[0] = 0;

```



```

00600         TransferBuffer(AT.aebufnum,AT.ebufnum,AT.allbufnum);
00601         return(1);
00602     }
00603     AT.idallflag = 0;
00604     power = 0;
00605     CC->numrhs = oldallnumrhs;
00606     TermFree(AN.termbuffer,"id,all");
00607     AN.termbuffer = OldTermBuffer;
00608     break;
00609     default :
00610         break;
00611 }
00612 if ( power ) {
00613     Substitute(BHEAD term,m,power);
00614     if ( numdollars ) {
00615         WildDollars(BHEAD (WORD *)0);
00616         numdollars = 0;
00617     }
00618     match = 1;
00619     if ( ( ll2 & SUBAFTER ) != 0 ) { /* ifmatch -> */
00620         *level = AC.Labels[ll[3]];
00621     }
00622 }
00623 else {
00624     AT.WorkPointer = AN.RepFunList;
00625     if ( ( ll2 & SUBAFTERNOT ) != 0 ) { /* ifnomatch -> */
00626         *level = AC.Labels[ll[3]];
00627     }
00628 }
00629 nextlevel:;
00630 } while ( (*level)++ < AR.Cnumlhs && C->lhs[*level][0] == TYPEIDOLD );
00631 (*level)--;
00632 AT.WorkPointer = AN.RepFunList;
00633 return(match);
00634 }
00635
00636 /*
00637     #] TestMatch :
00638     #[ Substitute :          void Substitute(term,pattern,power)
00639 */
00640
00641 void Substitute(PHEAD WORD *term, WORD *pattern, WORD power)
00642 {
00643     GETBIDENTITY
00644     WORD *TemTerm;
00645     WORD *t, *m;
00646     WORD *tstop, *mstop;
00647     WORD *xstop, *ystop;
00648     WORD nt, *fill, nq, mt;
00649     WORD *q, *subterm, *tcoef, oldval1 = 0, newval3, i = 0;
00650     WORD PutExpr = 0, sign = 0;
00651     TemTerm = AT.WorkPointer;
00652     if ( ( (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer*2) ) > AT.WorkTop ) {
00653         MLOCK(ErrorMessageLock);
00654         MesWork();
00655         MUNLOCK(ErrorMessageLock);
00656         Terminate(-1);
00657     }
00658     m = pattern;
00659     mstop = m + *m;
00660     m++;
00661     t = term;
00662     t += *term - 1;
00663     tcoef = t;
00664     tstop = t - ABS(*t) + 1;
00665     t = term;
00666     t++;
00667     fill = TemTerm;
00668     fill++;
00669     if ( m < mstop ) { do {
00670 /*
00671         #[ SYMBOLS :
00672 */
00673         if ( *m == SYMBOL ) {
00674             ystop = m + m[1];
00675             m += 2;
00676             while ( *t != SYMBOL && t < tstop ) {
00677                 nq = t[1];
00678                 NCOPY(fill,t,nq);
00679             }
00680             if ( t >= tstop ) goto SubCoeef;
00681             *fill++ = SYMBOL;
00682             fill++;
00683             subterm = fill;
00684             xstop = t + t[1];
00685             t += 2;
00686             do {

```

```

00687         if ( *m == *t && t < xstop ) {
00688             nt = t[1];
00689             mt = m[1];
00690             if ( mt >= 2*MAXPOWER ) {
00691                 if ( CheckWild(BHEAD mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00692                     nt -= AN.oldvalue;
00693                     goto SubsL1;
00694                 }
00695             }
00696             else if ( mt <= -2*MAXPOWER ) {
00697                 if ( CheckWild(BHEAD -mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00698                     nt += AN.oldvalue;
00699                     goto SubsL1;
00700                 }
00701             }
00702             else {
00703                 nt -= mt * power;
00704             SubsL1:
00705                 if ( nt ) {
00706                     *fill++ = *t;
00707                     *fill++ = nt;
00708                 }
00709                 m += 2; t += 2;
00710             }
00711             else if ( *m >= 2*MAXPOWER ) {
00712                 while ( t < xstop ) { *fill++ = *t++; *fill++ = *t++; }
00713                 nq = WORDDIF(fill, subterm);
00714                 fill = subterm;
00715                 while ( nq > 0 ) {
00716                     if ( !CheckWild(BHEAD *m-2*MAXPOWER, SYMTOSYM, *fill, &newval3) ) {
00717                         mt = m[1];
00718                         if ( mt >= 2*MAXPOWER ) {
00719                             if ( CheckWild(BHEAD mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00720                                 if ( fill[1] -= AN.oldvalue ) goto SubsL2;
00721                             }
00722                         }
00723                         else if ( mt <= -2*MAXPOWER ) {
00724                             if ( CheckWild(BHEAD -mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00725                                 if ( fill[1] += AN.oldvalue ) goto SubsL2;
00726                             }
00727                         }
00728                         else {
00729                             if ( fill[1] -= mt * power ) {
00730             SubsL2:
00731                                 fill += nq;
00732                                 nq = 0;
00733                             }
00734                             break;
00735                         }
00736                     }
00737                     nq -= 2;
00738                     fill += 2;
00739                 }
00740                 if ( nq ) {
00741                     nq -= 2;
00742                     q = fill + 2;
00743                     while ( --nq >= 0 ) *fill++ = *q++;
00744                 }
00745                 m += 2;
00746             }
00747             else if ( *m < *t || t >= xstop ) { m += 2; }
00748             else { *fill++ = *t++; *fill++ = *t++; }
00749         } while ( m < ystop );
00750         while ( t < xstop ) *fill++ = *t++;
00751         nq = WORDDIF(fill, subterm);
00752         if ( nq > 0 ) {
00753             nq += 2;
00754             subterm[-1] = nq;
00755         }
00756         else { fill = subterm; fill -= 2; }
00757     }
00758     /*
00759     #] SYMBOLS :
00760     #[ DOTPRODUCTS :
00761     */
00762     else if ( *m == DOTPRODUCT ) {
00763         ystop = m + m[1];
00764         m += 2;
00765         while ( *t > DOTPRODUCT && t < tstop ) {
00766             nq = t[1];
00767             NCOPY(fill, t, nq);
00768         }
00769         if ( t >= tstop ) goto SubCoef;
00770         if ( *t != DOTPRODUCT ) {
00771             m = ystop;
00772             goto EndLoop;
00773         }
00774         *fill++ = DOTPRODUCT;

```

```

00774         fill++;
00775         subterm = fill;
00776         xstop = t + t[1];
00777         t += 2;
00778         do {
00779             if ( *m == *t && m[1] == t[1] && t < xstop ) {
00780                 nt = t[2];
00781                 mt = m[2];
00782                 if ( mt >= 2*MAXPOWER ) {
00783                     if ( CheckWild(BHEAD mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00784                         nt -= AN.oldvalue;
00785                         goto SubsL3;
00786                     }
00787                 }
00788                 else if ( mt <= -2*MAXPOWER ) {
00789                     if ( CheckWild(BHEAD -mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00790                         nt += AN.oldvalue;
00791                         goto SubsL3;
00792                     }
00793                 }
00794                 else {
00795                     nt -= mt * power;
00796 SubsL3:
00797                     if ( nt ) {
00798                         *fill++ = *t++;
00799                         *fill++ = *t;
00800                         *fill++ = nt;
00801                         t += 2;
00802                     }
00803                     else t += 3;
00804                 }
00805                 m += 3;
00806             }
00807             else if ( *m >= (AM.OffsetVector+WILDOFFSET) ) {
00808                 while ( t < xstop ) {
00809                     *fill++ = *t++; *fill++ = *t++; *fill++ = *t++;
00810                 }
00811                 oldvall = 1;
00812                 goto SubsL4;
00813             }
00814             else if ( m[1] >= (AM.OffsetVector+WILDOFFSET) ) {
00815                 while ( *m >= *t && t < xstop ) {
00816                     *fill++ = *t++; *fill++ = *t++; *fill++ = *t++;
00817                 }
00818                 oldvall = 0;
00819 SubsL4:
00820                 nq = WORDDIF(fill, subterm);
00821                 fill = subterm;
00822                 while ( nq > 0 ) {
00823                     if ( ( oldvall && ( (
00824                         !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, *fill, &newval3)
00825                         && !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, fill[1], &newval3)
00826                     ) || (
00827                         !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, *fill, &newval3)
00828                         && !CheckWild(BHEAD *m-WILDOFFSET, VECTOVEC, fill[1], &newval3)
00829                     ) ) || ( !oldvall && ( (
00830                         *m == *fill
00831                         && !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, fill[1], &newval3)
00832                     ) || (
00833                         !CheckWild(BHEAD m[1]-WILDOFFSET, VECTOVEC, *fill, &newval3)
00834                         && *m == fill[1] ) ) ) ) {
00835                         mt = m[2];
00836                         if ( mt >= 2*MAXPOWER ) {
00837                             if ( CheckWild(BHEAD mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00838                                 if ( fill[2] -= AN.oldvalue )
00839                                     goto SubsL5;
00840                             }
00841                             else if ( mt <= -2*MAXPOWER ) {
00842                                 if ( CheckWild(BHEAD -mt-2*MAXPOWER, SYMTONUM, -MAXPOWER, &newval3) ) {
00843                                     if ( fill[2] += AN.oldvalue )
00844                                         goto SubsL5;
00845                                 }
00846                             }
00847                             else {
00848 SubsL5:
00849                                 if ( fill[2] -= mt * power ) {
00850                                     fill += nq;
00851                                     nq = 0;
00852                                 }
00853                                 }
00854                                 m += 3;
00855                                 break;
00856                             }
00857                             fill += 3; nq -= 3;
00858                         }
00859                     }
00860                     if ( nq ) {
00861                         nq -= 3;
00862                         q = fill + 3;
00863                         while ( --nq >= 0 ) *fill++ = *q++;

```

```

00861         }
00862     }
00863     else if ( t >= xstop || *m < *t || ( *m == *t && m[1] < t[1] ) )
00864     { m += 3; }
00865     else {
00866         *fill++ = *t++; *fill++ = *t++; *fill++ = *t++;
00867     }
00868     while ( m < ystop );
00869     while ( t < xstop ) *fill++ = *t++;
00870     nq = WORDDIF(fill,subterm);
00871     if ( nq > 0 ) {
00872         nq += 2;
00873         subterm[-1] = nq;
00874     }
00875     else { fill = subterm; fill -= 2; }
00876 }
00877 /*
00878     #] DOTPRODUCTS :
00879     #[ FUNCTIONS :
00880 */
00881 else if ( *m >= FUNCTION ) {
00882     while ( *t >= FUNCTION || *t == SUBEXPRESSION ) {
00883         nt = WORDDIF(t,term);
00884         for ( mt = 0; mt < AN.RepFunNum; mt += 2 ) {
00885             if ( nt == AN.RepFunList[mt] ) break;
00886         }
00887         if ( mt >= AN.RepFunNum ) {
00888             nq = t[1];
00889             NCOPY(fill,t,nq);
00890         }
00891         else {
00892             WORD *oldt = 0;
00893             if ( *m == GAMMA && m[1] != FUNHEAD+1 ) {
00894                 oldt = t;
00895                 if ( ( i = AN.RepFunList[mt+1] ) > 0 ) {
00896                     *fill++ = GAMMA;
00897                     *fill++ = i + FUNHEAD+1;
00898                     FILLFUN(fill)
00899                     nq = i + 1;
00900                     t += FUNHEAD;
00901                     NCOPY(fill,t,nq);
00902                 }
00903                 t = oldt;
00904             }
00905             else if ( ( *t == LEVICIVITA ) || ( *t >= FUNCTION
00906                 && (functions[*t-FUNCTION].symmetric & ~REVERSEORDER) == ANTISYMMETRIC )
00907                 ) sign += AN.RepFunList[mt+1];
00908             else if ( *m >= FUNCTION+WILDOFFSET
00909                 && (functions[*m-FUNCTION-WILDOFFSET].symmetric & ~REVERSEORDER) == ANTISYMMETRIC
00910                 ) sign += AN.RepFunList[mt+1];
00911             if ( !PutExpr ) {
00912                 xstop = t + t[1];
00913                 t = AN.FullProto;
00914                 nq = t[1];
00915                 t[3] = power;
00916                 NCOPY(fill,t,nq);
00917                 t = xstop;
00918                 PutExpr = 1;
00919             }
00920             else t += t[1];
00921             if ( *m == GAMMA && m[1] != FUNHEAD+1 ) {
00922                 i = oldt[1] - m[1] - i;
00923                 if ( i > 0 ) {
00924                     *fill++ = GAMMA;
00925                     *fill++ = i + FUNHEAD+1;
00926                     FILLFUN(fill)
00927                     *fill++ = oldt[FUNHEAD];
00928                     t = t - i;
00929                     NCOPY(fill,t,i);
00930                 }
00931             }
00932             break;
00933         }
00934     }
00935     m += m[1];
00936 }
00937 /*
00938     #] FUNCTIONS :
00939     #[ VECTORS :
00940 */
00941 else if ( *m == VECTOR ) {
00942     while ( *t > VECTOR ) {
00943         nq = t[1];
00944         NCOPY(fill,t,nq);
00945     }
00946     xstop = t + t[1];
00947     ystop = m + m[1];

```

```

00948         t += 2;
00949         m += 2;
00950         *fill++ = VECTOR;
00951         fill++;
00952         subterm = fill;
00953         do {
00954             if ( *m == *t && m[1] == t[1] ) {
00955                 m += 2; t += 2;
00956             }
00957             else if ( *m >= (AM.OffsetVector+WILDOFFSET) ) {
00958                 while ( t < xstop ) *fill++ = *t++;
00959                 nq = WORDDIF(fill,subterm);
00960                 fill = subterm;
00961                 if ( m[1] < (AM.OffsetIndex+WILDOFFSET) ) {
00962                     do {
00963                         if ( m[1] == fill[1] &&
00964                             !CheckWild(BHEAD *m-WILDOFFSET,VECTOVEC,*fill,&newval3) )
00965                             break;
00966                         fill += 2;
00967                         nq -= 2;
00968                     } while ( nq > 0 );
00969                 }
00970                 else { /* Double wildcard */
00971                     do {
00972                         if ( !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,fill[1],&newval3)
00973                             && !CheckWild(BHEAD *m-WILDOFFSET,VECTOVEC,*fill,&newval3) )
00974                             break;
00975                         if ( *fill == oldvall && fill[1] == AN.oldvalue ) break;
00976                         fill += 2;
00977                         nq -= 2;
00978                     } while ( nq > 0 );
00979                 }
00980                 nq -= 2;
00981                 q = fill + 2;
00982                 if ( nq > 0 ) { NCOPY(fill,q,nq); }
00983                 m += 2;
00984             }
00985             else if ( *m <= *t &&
00986                 m[1] >= (AM.OffsetIndex + WILDOFFSET) ) {
00987                 while ( *m == *t && t < xstop )
00988                     { *fill++ = *t++; *fill++ = *t++; }
00989                 nq = WORDDIF(fill,subterm);
00990                 fill = subterm;
00991                 do {
00992                     if ( *m == *fill &&
00993                         !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,fill[1],&newval3) )
00994                         break;
00995                     nq -= 2;
00996                     fill += 2;
00997                 } while ( nq > 0 );
00998                 nq -= 2;
00999                 q = fill + 2;
01000                 if ( nq > 0 ) { NCOPY(fill,q,nq); }
01001                 m += 2;
01002             }
01003             else { *fill++ = *t++; *fill++ = *t++; }
01004         } while ( m < ystop );
01005         while ( t < xstop ) *fill++ = *t++;
01006         nq = WORDDIF(fill,subterm);
01007         if ( nq > 0 ) {
01008             nq += 2;
01009             subterm[-1] = nq;
01010         }
01011         else { fill = subterm; fill -= 2; }
01012     }
01013     /*
01014     #] VECTORS :
01015     #[ INDICES :
01016
01017     Currently without wildcards
01018     */
01019     else if ( *m == INDEX ) {
01020         while ( *t > INDEX ) {
01021             nq = t[1];
01022             NCOPY(fill,t,nq);
01023         }
01024         xstop = t + t[1];
01025         ystop = m + m[1];
01026         t += 2;
01027         m += 2;
01028         *fill++ = INDEX;
01029         fill++;
01030         subterm = fill;
01031         do {
01032             if ( *m == *t ) {
01033                 m += 1; t += 1;
01034             }

```

```

01035         else if ( *m >= (AM.OffsetIndex+WILDOFFSET) ) {
01036             while ( t < xstop ) *fill++ = *t++;
01037             nq = WORDDIF(fill, subterm);
01038             fill = subterm;
01039             do {
01040                 if ( !CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,*fill,&newval3) ) {
01041                     break;
01042                 }
01043                 fill += 1;
01044                 nq -= 1;
01045             } while ( nq > 0 );
01046             nq -= 1;
01047             if ( nq > 0 ) {
01048                 q = fill + 1;
01049                 NCOPY(fill,q,nq);
01050             }
01051             m += 1;
01052         }
01053         else {
01054             *fill++ = *t++;
01055         }
01056     } while ( m < ystop );
01057     while ( t < xstop ) *fill++ = *t++;
01058     nq = WORDDIF(fill,subterm);
01059     if ( nq > 0 ) {
01060         nq += 2;
01061         subterm[-1] = nq;
01062     }
01063     else { fill = subterm; fill -= 2; }
01064 }
01065 /*
01066 #] INDICES :
01067 #[ DELTAS :
01068 */
01069 else if ( *m == DELTA ) {
01070     while ( *t > DELTA ) {
01071         nq = t[1];
01072         NCOPY(fill,t,nq);
01073     }
01074     xstop = t + t[1];
01075     ystop = m + m[1];
01076     t += 2;
01077     m += 2;
01078     *fill++ = DELTA;
01079     fill++;
01080     subterm = fill;
01081     do {
01082         if ( *t == *m && t[1] == m[1] ) { m += 2; t += 2; }
01083         else if ( *m >= (AM.OffsetIndex+WILDOFFSET) ) { /* Two dummies */
01084             while ( t < xstop ) *fill++ = *t++;
01085             fill = subterm; /*
01086             oldvall = 1;
01087             goto SubsL6;
01088         }
01089         else if ( m[1] >= (AM.OffsetIndex+WILDOFFSET) ) {
01090             while ( (*m == *t || *m == t[1]) && ( t < xstop ) ) {
01091                 *fill++ = *t++; *fill++ = *t++;
01092             }
01093             oldvall = 0;
01094             SubsL6:
01095             nq = WORDDIF(fill,subterm);
01096             fill = subterm;
01097             do {
01098                 if ( ( oldvall && ( (
01099                     !CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,*fill,&newval3)
01100                     && !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,fill[1],&newval3)
01101                 ) || (
01102                     !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,*fill,&newval3)
01103                     && !CheckWild(BHEAD *m-WILDOFFSET,INDTOIND,fill[1],&newval3)
01104                 ) ) ) || ( !oldvall && ( (
01105                     *m == *fill
01106                     && !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,fill[1],&newval3)
01107                 ) || (
01108                     *m == fill[1]
01109                     && !CheckWild(BHEAD m[1]-WILDOFFSET,INDTOIND,*fill,&newval3)
01110                 ) ) ) ) break;
01111                 fill += 2;
01112                 nq -= 2;
01113             } while ( nq > 0 );
01114             nq -= 2;
01115             if ( nq > 0 ) {
01116                 q = fill + 2;
01117                 NCOPY(fill,q,nq);
01118             }
01119             m += 2;
01120         }
01121         else {
01122             *fill++ = *t++; *fill++ = *t++;

```

```

01122     }
01123     } while ( m < ystop );
01124     while ( t < xstop ) *fill++ = *t++;
01125     nq = WORDDIF(fill,subterm);
01126     if ( nq > 0 ) {
01127         nq += 2;
01128         subterm[-1] = nq;
01129     }
01130     else { fill = subterm; fill -= 2; }
01131 }
01132 /*
01133     #] DELTAS :
01134 */
01135 EndLoop;;
01136     } while ( m < mstop ); }
01137     while ( t < tstop ) *fill++ = *t++;
01138 SubCoef:
01139     if ( !PutExpr ) {
01140         t = AN.FullProto;
01141         nq = t[1];
01142         t[3] = power;
01143         NCOPY(fill,t,nq);
01144     }
01145     t = tcoef;
01146     nq = ABS(*t);
01147     t = tstop;
01148     NCOPY(fill,t,nq);
01149     nq = WORDDIF(fill,TemTerm);
01150     fill = term;
01151     t = TemTerm;
01152     *fill++ = nq--;
01153     t++;
01154     NCOPY(fill,t,nq);
01155     if ( sign ) {
01156         if ( ( sign & 1 ) != 0 ) fill[-1] = -fill[-1];
01157     }
01158     if ( AT.WorkPointer < fill ) AT.WorkPointer = fill;
01159     AN.RepFunNum = 0;
01160 }
01161
01162 /*
01163     #] Substitute :
01164     #[ FindSpecial :          WORD FindSpecial(term)
01165
01166     Routine to detect simplifications regarding the special functions
01167     exponent, denominator.
01168
01169 void FindSpecial(WORD *term)
01170 {
01171     WORD *t;
01172     WORD *tstop;
01173     t = term; t += *t - 1; tstop = t - ABS(*t) + 1; t = term;
01174     t++;
01175     if ( t < tstop ) { do {
01176         if ( *t == EXPONENT ) {
01177             Exponents can become simpler when:
01178             a: the exponent of an expression becomes an integer.
01179             b: The expression becomes zero.
01180         }
01181         else if ( *t == DENOMINATOR ) {
01182             Denominators can become simpler when:
01183             a: The denominator is a single term without functions.
01184             b: An overall coefficient can be removed.
01185             c: An overall object can be removed.
01186             The task is here to bring the denominator in an unique form.
01187         }
01188         t += *t;
01189     } while ( t < tstop ); }
01190 }
01191
01192     #] FindSpecial :
01193     #[ FindAll :              WORD FindAll(term,pattern,level,par)
01194 */
01195
01196 int FindAll(PHEAD WORD *term, WORD *pattern, WORD level, WORD *par)
01197 {
01198     GETBIDENTITY
01199     WORD *t, *m, *r, *mm, rnum;
01200     WORD *tstop, *mstop, *TwoProto, *vwhere = 0, oldv, oldvv, vv, level2;
01201     WORD v, nq, OffNum = AM.OffsetVector + WILD OFFSET, i, ii = 0, jj;
01202     WORD fromindex, *intens, notflag1 = 0, notflag2 = 0;
01203     CBUF *C;
01204     C = cbuf+AM.rbufnum;
01205     v = pattern[3]; /* The vector to be found */
01206     m = t = term;
01207     m += *m;

```

```

01209     m -= ABS(m[-1]);
01210     t++;
01211     if ( t < m ) do {
01212         tstop = t + t[1];
01213         fromindex = 2;
01214     /*
01215         #[ VECTOR :
01216     */
01217     if ( *t == VECTOR ) {
01218         r = t;
01219         r += 2;
01220 InVect:
01221         while ( r < tstop ) {
01222             oldv = *r;
01223             if ( v >= OffNum ) {
01224                 vwhere = AN.FullProto + 3 + SUBEXPSIZE;
01225                 if ( vwhere[1] == FROMSET || vwhere[1] == SETTONUM ) {
01226                     WORD *afirst, *alast, j;
01227                     j = vwhere[3];
01228                     if ( j > WILDOFFSET ) { j -= 2*WILDOFFSET; notflag1 = 1; }
01229                     else { notflag1 = 0; }
01230                     afirst = SetElements + Sets[j].first;
01231                     alast = SetElements + Sets[j].last;
01232                     ii = 1;
01233                     if ( notflag1 == 0 ) {
01234                         do {
01235                             if ( *afirst == *r ) {
01236                                 if ( vwhere[1] == SETTONUM ) {
01237                                     AN.FullProto[8+SUBEXPSIZE] = SYMTONUM;
01238                                     AN.FullProto[11+SUBEXPSIZE] = ii;
01239                                 }
01240                                 else if ( vwhere[4] >= 0 ) {
01241                                     oldv = *(afirst - Sets[j].first
01242                                         + Sets[vwhere[4]].first);
01243                                 }
01244                                 goto DoVect;
01245                             }
01246                             ii++;
01247                         } while ( ++afirst < alast );
01248                     }
01249                     else {
01250                         do {
01251                             if ( *afirst == *r ) break;
01252                         } while ( ++afirst < alast );
01253                         if ( afirst >= alast ) goto DoVect;
01254                     }
01255                 }
01256                 else goto DoVect;
01257             }
01258             else if ( v == *r ) {
01259 DoVect:
01260                 m = AT.WorkPointer;
01261                 tstop = t;
01262                 t = term;
01263                 mstop = t + *t;
01264                 do { *m++ = *t++; } while ( t < tstop );
01265                 vwhere = m;
01266                 t = AN.FullProto;
01267                 nq = t[1];
01268                 t[3] = 1;
01269                 NCOPY(m,t,nq);
01270                 t = tstop;
01271                 if ( fromindex == 1 ) m[-1] = FUNNYVEC;
01272                 else m[-1] = r[1]; /* The index is always here! */
01273                 if ( v >= OffNum ) vwhere[3+SUBEXPSIZE] = oldv;
01274                 if ( vwhere[1] > 12+SUBEXPSIZE ) {
01275                     vwhere[11+SUBEXPSIZE] = ii;
01276                     vwhere[8+SUBEXPSIZE] = SYMTONUM;
01277                 }
01278                 if ( t[1] > fromindex+2 ) {
01279                     *m++ = *t++;
01280                     *m++ = *t++ - fromindex;
01281                     while ( t < r ) *m++ = *t++;
01282                     t += fromindex;
01283                 }
01284                 else t += t[1];
01285                 do { *m++ = *t++; } while ( t < mstop );
01286                 *AT.WorkPointer = nq = WORDDIF(m,AT.WorkPointer);
01287                 m = AT.WorkPointer;
01288                 t = term;
01289                 NCOPY(t,m,nq);
01290                 AT.WorkPointer = t;
01291                 return(1);
01292             }
01293             r += fromindex;
01294         }
01295     /*

```



```

01296         #] VECTOR :
01297         #[ DOTPRODUCT :
01298     */
01299     else if ( *t == DOTPRODUCT ) {
01300         r = t;
01301         r += 2;
01302         do {
01303             if ( ( i = r[2] ) < 0 ) goto NextDot;
01304             if ( *r == r[1] ) { /* p.p */
01305                 oldv = *r;
01306                 if ( v == *r ) { /* v.v */
01307                     TwoVec:
01308                         m = AT.WorkPointer;
01309                         tstop = t;
01310                         t = term;
01311                         mstop = t + *t;
01312                         do { *m++ = *t++; } while ( t < tstop );
01313                         do {
01314                             vwhere = m;
01315                             t = AN.FullProto;
01316                             nq = t[1];
01317                             t[3] = 2;
01318                             NCOPY(m,t,nq);
01319                             m[-1] = ++AR.CurDum;
01320                             if ( v >= OffNum ) vwhere[3+SUBEXPSIZE] = oldv;
01321                         } while ( --i > 0 );
01322                         t = tstop;
01323                         if ( t[1] > 5 ) {
01324                             *m++ = *t++;
01325                             *m++ = *t++ - 3;
01326                             while ( t < r ) *m++ = *t++;
01327                             t += 3;
01328                         }
01329                         else t += t[1];
01330                         do { *m++ = *t++; } while ( t < mstop );
01331                         *AT.WorkPointer = nq = WORDDIF(m,AT.WorkPointer);
01332                         m = AT.WorkPointer;
01333                         t = term;
01334                         NCOPY(t,m,nq);
01335                         AT.WorkPointer = t;
01336                         return(1);
01337                     }
01338                 else if ( v >= OffNum ) { /* v?.v? */
01339                     vwhere = AN.FullProto + 3+SUBEXPSIZE;
01340                     if ( vwhere[1] == FROMSET || vwhere[1] == SETTONUM ) {
01341                         WORD *afirst, *alast, j;
01342                         j = vwhere[3];
01343                         if ( j > WILDOFFSET ) { j -= 2*WILDOFFSET; notflag1 = 1; }
01344                         else { notflag1 = 0; }
01345                         afirst = SetElements + Sets[j].first;
01346                         alast = SetElements + Sets[j].last;
01347                         ii = 1;
01348                         if ( notflag1 == 0 ) {
01349                             do {
01350                                 if ( *afirst == *r ) {
01351                                     if ( vwhere[1] == SETTONUM ) {
01352                                         AN.FullProto[8+SUBEXPSIZE] = SYMTONUM;
01353                                         AN.FullProto[11+SUBEXPSIZE] = ii;
01354                                     }
01355                                     else if ( vwhere[4] >= 0 ) {
01356                                         oldv = *(afirst - Sets[j].first
01357                                             + Sets[vwhere[4]].first);
01358                                         goto TwoVec;
01359                                     }
01360                                 }
01361                                 ii++;
01362                             } while ( ++afirst < alast );
01363                         }
01364                         else {
01365                             do {
01366                                 if ( *afirst == *r ) break;
01367                             } while ( ++afirst < alast );
01368                             if ( afirst >= alast ) goto TwoVec;
01369                         }
01370                     }
01371                     else goto TwoVec;
01372                 }
01373             }
01374         } else {
01375             if ( v == r[1] ) { r[1] = *r; *r = v; }
01376             oldv = *r;
01377             oldvv = r[1];
01378             if ( v == *r ) {
01379                 if ( !par ) { while ( ++level <= AR.Cnumlhs
01380                     && C->lhs[level][0] == TYPEIDOLD ) {
01381                     m = C->lhs[level];
01382                     m += IDHEAD;
01383                     if ( m[-IDHEAD+2] == SUBVECTOR ) {

```

```

01383         if ( ( vv = m[m[1]+3] ) == r[1] ) {
01384 OnePV:         TwoProto = AN.FullProto;
01385 TwoPV:         m = AT.WorkPointer;
01386                 tstop = t;
01387                 t = term;
01388                 mstop = t + *t;
01389                 do { *m++ = *t++; } while ( t < tstop );
01390                 do {
01391                     t = AN.FullProto;
01392                     vwhere = m + 3 + SUBEXPSIZE;
01393                     nq = t[1];
01394                     t[3] = 1;
01395                     NCOPY(m,t,nq);
01396                     m[-1] = ++AR.CurDum;
01397                     if ( v >= OffNum ) *vwhere = oldv;
01398                     if ( vwhere[-2-SUBEXPSIZE] > 12+SUBEXPSIZE ) {
01399                         vwhere[8] = ii;
01400                         vwhere[5] = SYMTONUM;
01401                     }
01402                     t = TwoProto;
01403                     vwhere = m + 3+SUBEXPSIZE;
01404                     mm = m;
01405                     nq = t[1];
01406                     t[3] = 1;
01407                     NCOPY(m,t,nq);
01408 /*
01409 The next two lines repair a bug. without them it takes twice
01410 the rhs of the first vector.
01411 */
01412                     mm[2] = C->lhs[level][IDHEAD+2];
01413                     mm[4] = C->lhs[level][IDHEAD+4];
01414                     m[-1] = AR.CurDum;
01415                     if ( vv >= OffNum ) *vwhere = oldvv;
01416                 } while ( --i > 0 );
01417                 goto CopRest;
01418             }
01419             else if ( vv > OffNum ) {
01420                 vwhere = AN.FullProto + 3+SUBEXPSIZE;
01421                 if ( vwhere[1] == FROMSET || vwhere[1] == SETTONUM ) {
01422                     WORD *afirst, *alast, j;
01423                     j = vwhere[3];
01424                     if ( j > WILDOFFSET ) { j -= 2*WILDOFFSET; notflag1 = 1; }
01425                     else { notflag1 = 0; }
01426                     afirst = SetElements + Sets[j].first;
01427                     alast = SetElements + Sets[j].last;
01428                     if ( notflag1 == 0 ) {
01429                         ii = 1;
01430                         do {
01431                             if ( *afirst == r[1] ) {
01432                                 if ( vwhere[1] == SETTONUM ) {
01433                                     AN.FullProto[8+SUBEXPSIZE] = SYMTONUM;
01434                                     AN.FullProto[11+SUBEXPSIZE] = ii;
01435                                 }
01436                                 else if ( vwhere[4] >= 0 ) {
01437                                     oldvv = *(afirst - Sets[j].first
01438                                         + Sets[vwhere[4]].first);
01439                                 }
01440                                 goto OnePV;
01441                             }
01442                             ii++;
01443                             } while ( ++afirst < alast );
01444                         }
01445                     else {
01446                         do {
01447                             if ( *afirst == *r ) break;
01448                             } while ( ++afirst < alast );
01449                             if ( afirst >= alast ) goto OnePV;
01450                         }
01451                     }
01452                 else goto OnePV;
01453             }
01454         }
01455     }}
01456 /*
01457 v.q with v matching and no match for the q, also
01458 not in following idold statements.
01459 Notice that a following q.p? cannot match.
01460 */
01461     rnum = r[1];
01462 OneOnly:     m = AT.WorkPointer;
01463             tstop = t;
01464             t = term;
01465             mstop = t + *t;
01466             do { *m++ = *t++; } while ( t < tstop );
01467             vwhere = m;
01468             t = AN.FullProto;
01469             nq = t[1];

```

```

01470         t[3] = i;
01471         NCOPY(m,t,nq);
01472         m[-4] = INDTOIND;
01473         m[-1] = rnum;
01474         if ( v >= OffNum ) vwhere[3+SUBEXPSIZE] = oldv;
01475         goto CopRest;
01476     }
01477     else if ( v >= OffNum ) {
01478         vwhere = AN.FullProto + 3+SUBEXPSIZE;
01479         if ( vwhere[1] == FROMSET || vwhere[1] == SETTONUM ) {
01480             WORD *afirst, *alast, *bfirst, *blast, j;
01481             j = vwhere[3];
01482             if ( j > WILDOFFSET ) { j -= 2*WILDOFFSET; notflag1 = 1; }
01483             else { notflag1 = 0; }
01484             afirst = SetElements + Sets[j].first;
01485             alast = SetElements + Sets[j].last;
01486             ii = 1;
01487             if ( notflag1 == 0 ) {
01488                 do {
01489                     if ( *afirst == *r ) {
01490                         if ( vwhere[1] == SETTONUM ) {
01491                             AN.FullProto[8+SUBEXPSIZE] = SYMTONUM;
01492                             AN.FullProto[11+SUBEXPSIZE] = ii;
01493                         }
01494                         else if ( vwhere[4] >= 0 ) {
01495                             oldv = *(afirst - Sets[j].first
01496                                 + Sets[vwhere[4]].first);
01497                         }
01498                         level2 = level;
01499                         do {
01500                             if ( !par ) m = C->lhs[level2];
01501                             else m = par;
01502                             m += IDHEAD;
01503                             if ( m[-IDHEAD+2] == SUBVECTOR ) {
01504                                 if ( ( vv = m[m[1]+3] ) == r[1] )
01505                                     goto OnePV;
01506                                 else if ( vv >= OffNum ) {
01507                                     if ( m[SUBEXPSIZE+4] != FROMSET &&
01508                                         m[SUBEXPSIZE+4] != SETTONUM ) goto OnePV;
01509                                     j = m[SUBEXPSIZE+6];
01510                                     if ( j > WILDOFFSET ) { j -= 2*WILDOFFSET; notflag2 = 1; }
01511                                     else { notflag2 = 0; }
01512                                     bfirst = SetElements + Sets[j].first;
01513                                     blast = SetElements + Sets[j].last;
01514                                     jj = 1;
01515                                     if ( notflag2 == 0 ) {
01516                                         do {
01517                                             if ( *bfirst == r[1] ) {
01518                                                 if ( m[SUBEXPSIZE+4] == SETTONUM ) {
01519                                                     m[SUBEXPSIZE+8] = SYMTONUM;
01520                                                     m[SUBEXPSIZE+11] = jj;
01521                                                 }
01522                                                 else if ( m[SUBEXPSIZE+7] >= 0 ) {
01523                                                     oldvv = *(bfirst - Sets[j].first
01524                                                         + Sets[m[SUBEXPSIZE+7]].first);
01525                                                 }
01526                                                 goto OnePV;
01527                                             }
01528                                             jj++;
01529                                         } while ( ++bfirst < blast );
01530                                     }
01531                                     else {
01532                                         do {
01533                                             if ( *bfirst == r[1] ) break;
01534                                         } while ( ++bfirst < blast );
01535                                         if ( bfirst >= blast ) goto OnePV;
01536                                     }
01537                                 }
01538                             } while ( ++level2 < AR.Cnumlhs &&
01539                                 C->lhs[level2][0] == TYPEIDOLD );
01540                             rnum = r[1];
01541                             goto OneOnly;
01542                         }
01543                     }
01544                     else if ( *afirst == r[1] ) {
01545                         if ( vwhere[1] == SETTONUM ) {
01546                             AN.FullProto[8+SUBEXPSIZE] = SYMTONUM;
01547                             AN.FullProto[11+SUBEXPSIZE] = ii;
01548                         }
01549                         else if ( vwhere[4] >= 0 ) {
01550                             oldv = *(afirst - Sets[j].first
01551                                 + Sets[vwhere[4]].first);
01552                         }
01553                         level2 = level;
01554                         while ( ++level2 < AR.Cnumlhs &&
01555                             C->lhs[level2][0] == TYPEIDOLD ) {
01556                             if ( !par ) m = C->lhs[level2];

```

```

01557         else m = par;
01558         m += IDHEAD;
01559         if ( m[-IDHEAD+2] == SUBVECTOR ) {
01560             if ( ( vv = m[6] ) == *r )
01561                 goto OnePV;
01562             else if ( vv >= OffNum ) {
01563                 if ( m[SUBEXPSIZE+4] != FROMSET && m[SUBEXPSIZE+4]
01564                     != SETTONUM ) {
01565                     j = *r;
01566                     *r = r[1];
01567                     r[1] = j;
01568                     goto OnePV;
01569                 }
01570                 j = m[SUBEXPSIZE+6];
01571                 bfirst = SetElements + Sets[j].first;
01572                 blast = SetElements + Sets[j].last;
01573                 jj = 1;
01574                 do {
01575                     if ( *bfirst == *r ) {
01576                         if ( m[SUBEXPSIZE+4] == SETTONUM ) {
01577                             m[SUBEXPSIZE+8] = SYMTONUM;
01578                             m[SUBEXPSIZE+11] = jj;
01579                         }
01580                         else if ( m[SUBEXPSIZE+7] >= 0 ) {
01581                             oldvv = *(bfirst - Sets[j].first
01582                                 + Sets[m[SUBEXPSIZE+7]].first);
01583                         }
01584                         j = *r;
01585                         *r = r[1];
01586                         r[1] = j;
01587                         j = oldv; oldv = oldvv; oldvv = j;
01588                         goto OnePV;
01589                     }
01590                     jj++;
01591                 } while ( ++bfirst < blast );
01592             }
01593         }
01594     }
01595     jj = *r; *r = r[1]; r[1] = jj;
01596     jj = oldv; oldv = oldvv; oldvv = j;
01597     rnum = r[1];
01598     goto OneOnly;
01599 }
01600 ii++;
01601 } while ( ++afirst < alast );
01602 }
01603 else {
01604     do {
01605         if ( *afirst == *r ) break;
01606     } while ( ++afirst < alast );
01607     if ( afirst >= alast ) goto Hitlevel1;
01608     do {
01609         if ( *afirst == r[1] ) break;
01610     } while ( ++afirst < alast );
01611     if ( afirst >= alast ) goto Hitlevel2;
01612 }
01613 }
01614 else { /* Matches twice */
01615     vv = v;
01616     TwoProto = AN.FullProto;
01617     goto TwoPV;
01618 }
01619 }
01620 }
01621 NextDot:    r += 3;
01622 } while ( r < tstop );
01623 }
01624 /*
01625     #] DOTPRODUCT :
01626     #[ LEVICIVITA :
01627 */
01628 else if ( *t == LEVICIVITA ) {
01629     intens = 0;
01630     r = t;
01631     r += FUNHEAD;
01632 OneVect::
01633     while ( r < tstop ) {
01634         oldv = *r;
01635         if ( v >= OffNum && *r < -10 ) {
01636             vwhere = AN.FullProto + 3+SUBEXPSIZE;
01637             if ( vwhere[1] == FROMSET || vwhere[1] == SETTONUM ) {
01638                 WORD *afirst, *alast, j;
01639                 j = vwhere[3];
01640                 if ( j > WILDOFFSET ) { j -= 2*WILDOFFSET; notflag1 = 1; }
01641                 else { notflag1 = 0; }
01642                 afirst = SetElements + Sets[j].first;
01643                 alast = SetElements + Sets[j].last;

```

```

01644             ii = 1;
01645             if ( notflag1 == 0 ) {
01646                 do {
01647                     if ( *afirst == *r ) {
01648                         if ( vwhere[1] == SETTONUM ) {
01649                             AN.FullProto[8+SUBEXPSIZE] = SYMTONUM;
01650                             AN.FullProto[11+SUBEXPSIZE] = ii;
01651                         }
01652                         else if ( vwhere[4] >= 0 ) {
01653                             oldv = *(afirst - Sets[j].first
01654                                 + Sets[vwhere[4]].first);
01655                         }
01656                         goto DoVect;
01657                     }
01658                     ii++;
01659                 } while ( ++afirst < alast );
01660             }
01661             else {
01662                 do {
01663                     if ( *afirst == *r ) break;
01664                 } while ( ++afirst < alast );
01665                 if ( afirst >= alast ) goto DoVect;
01666             }
01667         }
01668         else goto LeVect;
01669     }
01670     else if ( v == *r ) {
01671 LeVect:
01672         m = AT.WorkPointer;
01673         mstop = term + *term;
01674         t = term;
01675         *r = ++AR.CurDum;
01676         if ( intens ) *intens = DIRTYSYMFLAG;
01677         do { *m++ = *t++; } while ( t < tstop );
01678         t = AN.FullProto;
01679         nq = t[1];
01680         t[3] = 1;
01681         if ( v >= OffNum ) *vwhere = oldv;
01682         NCOPY(m,t,nq);
01683         m[-1] = AR.CurDum;
01684         t = tstop;
01685         do { *m++ = *t++; } while ( t < mstop );
01686         *AT.WorkPointer = nq = WORDDIF(m,AT.WorkPointer);
01687         m = AT.WorkPointer;
01688         t = term;
01689         NCOPY(t,m,nq);
01690         AT.WorkPointer = t;
01691         return(1);
01692     }
01693     r++;
01694 }
01695 /*
01696     #] LEVICIVITA :
01697     #[ GAMMA :
01698 */
01699     else if ( *t == GAMMA ) {
01700         intens = 0;
01701         r = t;
01702         r += FUNHEAD+1;
01703         if ( r < tstop ) goto OneVect;
01704     }
01705 /*
01706     #] GAMMA :
01707     #[ INDEX :
01708 */
01709     else if ( *t == INDEX ) { /* The 'forgotten' part */
01710         r = t;
01711         r += 2;
01712         fromindex = 1;
01713         goto InVect;
01714     }
01715 /*
01716     #] INDEX :
01717     #[ FUNCTION :
01718 */
01719     else if ( *t >= FUNCTION ) {
01720         if ( *t >= FUNCTION
01721             && functions[*t-FUNCTION].spec >= TENSORFUNCTION
01722             && t[1] > FUNHEAD ) {
01723 /*
01724             Tensors are linear in their vectors!
01725 */
01726             r = t;
01727             r += FUNHEAD;
01728             intens = t+2;
01729             goto OneVect;
01730         }

```

```

01731     }
01732  /*
01733     #] FUNCTION :
01734  */
01735     t += t[1];
01736   } while ( t < m );
01737   return(0);
01738 }
01739
01740 /*
01741     #] FindAll :
01742     #[ TestSelect :
01743
01744     Returns 1 if any of the objects in any of the sets in setp
01745     occur anywhere in the term
01746  */
01747
01748 int TestSelect(WORD *term, WORD *setp)
01749 {
01750     WORD *tstop, *t, *s, *el, *elstop, *termstop, *tt, n, ns;
01751     GETSTOP(term,tstop);
01752     term += 1;
01753     while ( term < tstop ) {
01754         switch ( *term ) {
01755             case SYMBOL:
01756                 n = term[1] - 2;
01757                 t = term + 2;
01758                 while ( n > 0 ) {
01759                     ns = setp[1] - 2;
01760                     s = setp + 2;
01761                     while ( --ns >= 0 ) {
01762                         if ( Sets[*s].type != CSYMBOL ) { s++; continue; }
01763                         el = SetElements + Sets[*s].first;
01764                         elstop = SetElements + Sets[*s].last;
01765                         while ( el < elstop ) {
01766                             if ( *el++ == *t ) return(1);
01767                         }
01768                         s++;
01769                     }
01770                     n -= 2;
01771                     t += 2;
01772                 }
01773                 break;
01774             case VECTOR:
01775                 n = term[1] - 2;
01776                 t = term + 2;
01777                 while ( n > 0 ) {
01778                     ns = setp[1] - 2;
01779                     s = setp + 2;
01780                     while ( --ns >= 0 ) {
01781                         if ( Sets[*s].type != CVECTOR ) { s++; continue; }
01782                         el = SetElements + Sets[*s].first;
01783                         elstop = SetElements + Sets[*s].last;
01784                         while ( el < elstop ) {
01785                             if ( *el++ == *t ) return(1);
01786                         }
01787                         s++;
01788                     }
01789                     t++;
01790                     ns = setp[1] - 2;
01791                     s = setp + 2;
01792                     while ( --ns >= 0 ) {
01793                         if ( Sets[*s].type != CINDEX
01794                             && Sets[*s].type != CNUMBER ) { s++; continue; }
01795                         el = SetElements + Sets[*s].first;
01796                         elstop = SetElements + Sets[*s].last;
01797                         while ( el < elstop ) {
01798                             if ( *el++ == *t ) return(1);
01799                         }
01800                         s++;
01801                     }
01802                     n -= 2;
01803                     t++;
01804                 }
01805                 break;
01806             case INDEX:
01807                 n = term[1] - 2;
01808                 t = term + 2;
01809                 goto dotensor;
01810             case DOTPRODUCT:
01811                 n = term[1] - 2;
01812                 t = term + 2;
01813                 while ( n > 0 ) {
01814                     ns = setp[1] - 2;
01815                     s = setp + 2;
01816                     while ( --ns >= 0 ) {
01817                         if ( Sets[*s].type != CVECTOR ) { s++; continue; }

```

```

01818         el = SetElements + Sets[*s].first;
01819         elstop = SetElements + Sets[*s].last;
01820         while ( el < elstop ) {
01821             if ( *el++ == *t ) return(1);
01822         }
01823         s++;
01824     }
01825     t++;
01826     ns = setp[1] - 2;
01827     s = setp + 2;
01828     while ( --ns >= 0 ) {
01829         if ( Sets[*s].type != CVECTOR ) { s++; continue; }
01830         el = SetElements + Sets[*s].first;
01831         elstop = SetElements + Sets[*s].last;
01832         while ( el < elstop ) {
01833             if ( *el++ == *t ) return(1);
01834         }
01835         s++;
01836     }
01837     n -= 3;
01838     t += 2;
01839 }
01840 break;
01841 case DELTA:
01842     n = term[1] - 2;
01843     t = term + 2;
01844     goto dotensor;
01845 default:
01846     if ( *term < FUNCTION ) break;
01847     ns = setp[1] - 2;
01848     s = setp + 2;
01849     while ( --ns >= 0 ) {
01850         if ( Sets[*s].type != CFUNCTION ) { s++; continue; }
01851         el = SetElements + Sets[*s].first;
01852         elstop = SetElements + Sets[*s].last;
01853         while ( el < elstop ) {
01854             if ( *el++ == *term ) return(1);
01855         }
01856         s++;
01857     }
01858     if ( functions[*term-FUNCTION].spec > 0 ) {
01859         n = term[1] - FUNHEAD;
01860         t = term + FUNHEAD;
01861 dotensor:
01862         while ( n > 0 ) {
01863             ns = setp[1] - 2;
01864             s = setp + 2;
01865             while ( --ns >= 0 ) {
01866                 if ( *t < MINSPEC ) {
01867                     if ( Sets[*s].type != CVECTOR ) { s++; continue; }
01868                 }
01869                 else if ( *t >= 0 ) {
01870                     if ( Sets[*s].type != CINDEX
01871                         && Sets[*s].type != CNUMBER ) { s++; continue; }
01872                 }
01873                 else { s++; continue; }
01874                 el = SetElements + Sets[*s].first;
01875                 elstop = SetElements + Sets[*s].last;
01876                 while ( el < elstop ) {
01877                     if ( *el++ == *t ) return(1);
01878                 }
01879                 s++;
01880             }
01881             t++;
01882             n--;
01883         }
01884     }
01885     else {
01886         termstop = term + term[1];
01887         tt = term + FUNHEAD;
01888         while ( tt < termstop ) {
01889             if ( *tt < 0 ) {
01890                 if ( *tt == -SYMBOL ) {
01891                     ns = setp[1] - 2;
01892                     s = setp + 2;
01893                     while ( --ns >= 0 ) {
01894                         if ( Sets[*s].type != CSYMBOL ) { s++; continue; }
01895                         el = SetElements + Sets[*s].first;
01896                         elstop = SetElements + Sets[*s].last;
01897                         while ( el < elstop ) {
01898                             if ( *el++ == tt[1] ) return(1);
01899                         }
01900                         s++;
01901                     }
01902                     tt += 2;
01903                 }
01904                 else if ( *tt == -VECTOR || *tt == -MINVECTOR ) {

```

```

01905         ns = setp[1] - 2;
01906         s = setp + 2;
01907         while ( --ns >= 0 ) {
01908             if ( Sets[*s].type != CVECTOR ) { s++; continue; }
01909             el = SetElements + Sets[*s].first;
01910             elstop = SetElements + Sets[*s].last;
01911             while ( el < elstop ) {
01912                 if ( *el++ == tt[1] ) return(1);
01913             }
01914             s++;
01915         }
01916         tt += 2;
01917     }
01918     else if ( *tt == -INDEX ) {
01919         ns = setp[1] - 2;
01920         s = setp + 2;
01921         while ( --ns >= 0 ) {
01922             if ( Sets[*s].type != CINDEX
01923                 && Sets[*s].type != CNUMBER ) { s++; continue; }
01924             el = SetElements + Sets[*s].first;
01925             elstop = SetElements + Sets[*s].last;
01926             while ( el < elstop ) {
01927                 if ( *el++ == tt[1] ) return(1);
01928             }
01929             s++;
01930         }
01931         tt += 2;
01932     }
01933     else if ( *tt <= -FUNCTION ) {
01934         ns = setp[1] - 2;
01935         s = setp + 2;
01936         while ( --ns >= 0 ) {
01937             if ( Sets[*s].type != CFUNCTION ) { s++; continue; }
01938             el = SetElements + Sets[*s].first;
01939             elstop = SetElements + Sets[*s].last;
01940             while ( el < elstop ) {
01941                 if ( *el++ == -( *tt ) ) return(1);
01942             }
01943             s++;
01944         }
01945         tt++;
01946     }
01947     else tt += 2;
01948 }
01949 else {
01950     t = tt + ARGHEAD;
01951     tt += *tt;
01952     while ( t < tt ) {
01953         if ( TestSelect(t,setp) ) return(1);
01954         t += *t;
01955     }
01956 }
01957 }
01958 }
01959 break;
01960 }
01961 term += term[1];
01962 }
01963 return(0);
01964 }
01965
01966 /*
01967     #] TestSelect :
01968     #[ SubsInAll :      void SubsInAll()
01969
01970     This routine takes a match in id,all and stores it away in
01971     the AT.allbufnum 'compiler' buffer, after taking out the pattern.
01972     The main problem here is that id,all usually has (lots of) wildcards
01973     and their assignments are on stack and the difficult ones are in
01974     AT.ebufnum. Popping the stack while looking for more matches would
01975     loose those. Hence we have to copy them into yet another compiler
01976     buffer: AT.aebufnum. Because this may involve many matches and
01977     because the original term has only a limited number of arguments,
01978     it will pay to look for already existing ones in this buffer.
01979     (to be done later).
01980 */
01981
01982 void SubsInAll(PHEAD0)
01983 {
01984     GETBIDENTITY
01985     WORD *TemTerm;
01986     WORD *t, *m, *term;
01987     WORD *tstop, *mstop, *xstop;
01988     WORD nt, *fill, nq, mt;
01989     WORD *tcoef, i = 0;
01990     WORD PutExpr = 0, sign = 0;
01991 }

```



```

01992     We start with building the term in the Workspace.
01993     Afterwards we will transfer it to AT.allbufnum.
01994     We have to make sure there is room in the Workspace.
01995 */
01996     AT.idallflag = 2;
01997     TemTerm = AT.WorkPointer;
01998     if ( ( (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer*2) ) > AT.WorkTop ) {
01999         MLOCK(ErrorMessageLock);
02000         MesWork();
02001         MUNLOCK(ErrorMessageLock);
02002         Terminate(-1);
02003     }
02004     m = AN.patternbuffer + IDHEAD; m += m[1];
02005     mstop = m + *m;
02006     m++;
02007     term = AN.termbuffer;
02008     tstop = term + *term; tcoef = tstop-1; tstop -= ABS(tstop[-1]);
02009     t = term;
02010     t++;
02011     fill = TemTerm;
02012     fill++;
02013     while ( m < mstop ) {
02014         while ( t < tstop ) {
02015             nt = WORDDIF(t,term);
02016             for ( mt = 0; mt < AN.RepFunNum; mt += 2 ) {
02017                 if ( nt == AN.RepFunList[mt] ) break;
02018             }
02019             if ( mt >= AN.RepFunNum ) {
02020                 nq = t[1];
02021                 NCOPY(fill,t,nq);
02022             }
02023             else {
02024                 WORD *oldt = 0;
02025                 if ( *m == GAMMA && m[1] != FUNHEAD+1 ) {
02026                     oldt = t;
02027                     if ( ( i = AN.RepFunList[mt+1] ) > 0 ) {
02028                         *fill++ = GAMMA;
02029                         *fill++ = i + FUNHEAD+1;
02030                         FILLFUN(fill)
02031                         nq = i + 1;
02032                         t += FUNHEAD;
02033                         NCOPY(fill,t,nq);
02034                     }
02035                     t = oldt;
02036                 }
02037                 else if ( ( *t == LEVICIVITA ) || ( *t >= FUNCTION
02038                     && (functions[*t-FUNCTION].symmetric & ~REVERSEORDER) == ANTISYMMETRIC )
02039                     ) sign += AN.RepFunList[mt+1];
02040                 else if ( *m >= FUNCTION+WILDOFFSET
02041                     && (functions[*m-FUNCTION-WILDOFFSET].symmetric & ~REVERSEORDER) == ANTISYMMETRIC
02042                     ) sign += AN.RepFunList[mt+1];
02043                 if ( !PutExpr ) {
02044                     WORD *pstart = fill, *p, *w, *ww;
02045                     xstop = t + t[1];
02046                     t = AN.FullProto;
02047                     nq = t[1];
02048                     t[3] = 1;
02049                     NCOPY(fill,t,nq);
02050                     t = xstop;
02051                     PutExpr = 1;
02052 */
02053
02054     Here we need provisions for keeping wildcard matches
02055     that reside in AT.ebufnum. We will move them to
02056     AT.aebufnum.
02057     Problem: the SUBEXPRESSION assumes automatically
02058     that the compiler buffer is AT.ebufnum. We have to
02059     correct that in TransferBuffer.
02059 */
02060     p = pstart + SUBEXPSIZE;
02061     while ( p < fill ) {
02062         switch ( *p ) {
02063             case SYMTOSUB:
02064             case VECTOSUB:
02065             case INDTOSUB:
02066             case ARGTOARG:
02067             case ARLTOARL:
02068                 w = cbuf[AT.ebufnum].rhs[p[3]];
02069                 ww = cbuf[AT.ebufnum].rhs[p[3]+1];
02070 */
02071
02072     Here we could search for whether this
02073     object sits in the buffer already.
02074     To be done later.
02075     By the way: ww-w fits inside a WORD.
02075 */
02076     AddRHS(AT.aebufnum,1);
02077     AddNtoC(AT.aebufnum,ww-w,w,11);
02078     p[3] = cbuf[AT.aebufnum].numrhs;

```

```

02079             cbuf[AT.aebufnum].rhs[p[3]+1] = cbuf[AT.aebufnum].Pointer;
02080             p += p[1];
02081             break;
02082             case FROMSET:
02083             case SETTONUM:
02084             case LOADDOLLAR:
02085                 p += p[1];
02086                 break;
02087             default:
02088                 p += p[1];
02089                 break;
02090         }
02091     }
02092 }
02093 }
02094 else t += t[1];
02095 if ( *m == GAMMA && m[1] != FUNHEAD+1 ) {
02096     i = oldt[1] - m[1] - i;
02097     if ( i > 0 ) {
02098         *fill++ = GAMMA;
02099         *fill++ = i + FUNHEAD+1;
02100         FILLFUN(fill)
02101         *fill++ = oldt[FUNHEAD];
02102         t = t - i;
02103         NCOPY(fill,t,i);
02104     }
02105 }
02106 break;
02107 }
02108 }
02109 m += m[1];
02110 }
02111 while ( t < tstop ) *fill++ = *t++;
02112 if ( !PutExpr ) {
02113     t = AN.FullProto;
02114     nq = t[1];
02115     t[3] = 1;
02116     NCOPY(fill,t,nq);
02117 }
02118 t = tcoef;
02119 nq = ABS(*t);
02120 t = tstop;
02121 NCOPY(fill,t,nq);
02122 if ( sign ) {
02123     if ( ( sign & 1 ) != 0 ) fill[-1] = -fill[-1];
02124 }
02125 *TemTerm = fill-TemTerm;
02126 /*
02127 And now we copy this to AT.allbufnum
02128 */
02129 AddNtoC(AT.allbufnum,TemTerm[0],TemTerm,12);
02130 cbuf[AT.allbufnum].Pointer[0] = 0;
02131 AN.RepFunNum = 0;
02132 }
02133
02134 /*
02135 #] SubsInAll :
02136 #[ TransferBuffer :
02137
02138 Adds the whole content of a (compiler)buffer to another buffer.
02139 In spectator we have an expression in the RHS that needs the
02140 wildcard resolutions adapted by an offset.
02141 */
02142
02143 void TransferBuffer(int from,int to,int spectator)
02144 {
02145     CBUF *C = cbuf + spectator;
02146     CBUF *Cf = cbuf + from;
02147     CBUF *Ct = cbuf + to;
02148     int offset = Ct->numrhs;
02149     LONG i;
02150     WORD *t, *tt, *ttt, *tstop, size;
02151     for ( i = 1; i <= Cf->numrhs; i++ ) {
02152         size = Cf->rhs[i+1]-Cf->rhs[i];
02153         AddRHS(to,1);
02154         AddNtoC(to,size,Cf->rhs[i],13);
02155     }
02156     Ct->rhs[Ct->numrhs+1] = Ct->Pointer;
02157     Cf->numrhs = 0;
02158 /*
02159 Now we have to update the 'pointers' in the spectator.
02160 */
02161 t = C->rhs[C->numrhs];
02162 while ( *t ) {
02163     tt = t+1; t += *t;
02164     tstop = t-ABS(t[-1]);
02165     while ( tt < tstop ) {

```

```

02166         if ( *tt == SUBEXPRESSION ) {
02167             ttt = tt+SUBEXPSIZE; tt += tt[1];
02168             while ( ttt < tt ) {
02169                 switch ( *ttt ) {
02170                     case SYMTOSUB:
02171                     case VECTOSUB:
02172                     case INDIOSUB:
02173                     case ARGTOARG:
02174                     case ARLTOARL:
02175                         ttt[3] += offset;
02176                         break;
02177                     default:
02178                         break;
02179                 }
02180                 ttt += 4;
02181             }
02182         }
02183         else tt += tt[1];
02184     }
02185 }
02186 }
02187
02188 /*
02189     #] TransferBuffer :
02190     #[ TakeIDfunction :
02191 */
02192
02193 #define PutInBuffers(pow) \
02194     AddrRHS(AT.ebufnum,1); \
02195     *out++ = SUBEXPRESSION; \
02196     *out++ = SUBEXPSIZE; \
02197     *out++ = C->numrhs; \
02198     *out++ = pow; \
02199     *out++ = AT.ebufnum; \
02200     FILLSUB(out) \
02201     r = AT.pWorkspace[rhs+i]; \
02202     if ( *r > 0 ) { \
02203         oldinr = r[*r]; r[*r] = 0; \
02204         AddNtoC(AT.ebufnum, (*r+1-ARGHEAD), (r+ARGHEAD), 14); \
02205         r[*r] = oldinr; \
02206     } \
02207     else { \
02208         ToGeneral(r,buffer,1); \
02209         buffer[buffer[0]] = 0; \
02210         AddNtoC(AT.ebufnum,buffer[0]+1,buffer,15); \
02211     }
02212
02213 int TakeIDfunction(PHEAD WORD *term)
02214 {
02215     WORD *tstop, *t, *r, *m, *f, *nextf, *funstop, *left, *l, *newterm;
02216     WORD *out, oldinr, pow;
02217     WORD buffer[20];
02218     int i, ii, j, numsub, numfound = 0, first;
02219     LONG lhs,rhs;
02220     CBUF *C;
02221     GETSTOP(term,tstop);
02222     for ( t = term+1; t < tstop; t += t[1] ) { if ( *t == IDFUNCTION ) break; }
02223     if ( t >= tstop ) return(0);
02224 /*
02225     Step 1: test validity
02226 */
02227     funstop = t + t[1]; f = t + FUNHEAD;
02228     left = term + *term;
02229     l = left+1; numsub = 0;
02230     while ( f < funstop ) {
02231         nextf = f; NEXTARG(nextf)
02232         if ( nextf >= funstop ) { return(0); } /* odd number of arguments */
02233         if ( *f == -SYMBOL ) { *l++ = SYMBOL; *l++ = 4; *l++ = f[1]; *l++ = 1; }
02234         else if ( *f < -FUNCTION ) { *l++ = *f; *l++ = FUNHEAD; FILLFUN(1) }
02235         else if ( *f > 0 ) {
02236             if ( *f != f[ARGHEAD]+ARGHEAD ) goto noaction;
02237             if ( nextf[-1] != 3 || nextf[-2] != 1 || nextf[-3] != 1 ) goto noaction;
02238             if ( f[ARGHEAD] <= 4 ) goto noaction;
02239             if ( f[ARGHEAD] != f[ARGHEAD+2]+4 ) goto noaction;
02240             if ( f[ARGHEAD] == 8 && f[ARGHEAD+1] == SYMBOL ) {
02241                 for ( i = 0; i < 4; i++ ) *l++ = f[ARGHEAD+1+i];
02242             }
02243             else if ( f[ARGHEAD] == 9 && f[ARGHEAD+1] == DOTPRODUCT ) {
02244                 for ( i = 0; i < 5; i++ ) *l++ = f[ARGHEAD+1+i];
02245             }
02246             else if ( f[ARGHEAD+1] >= FUNCTION ) {
02247                 for ( i = 0; i < f[ARGHEAD+1]-4; i++ ) *l++ = f[ARGHEAD+1+i];
02248             }
02249             else goto noaction;
02250         }
02251         else goto noaction;
02252         numsub++;

```

```

02253         f = nextf;
02254         NEXTARG(f)
02255     }
02256     C = cbuf+AT.ebufnum;
02257     AT.WorkPointer = l;
02258     *left = l-left;
02259 /*
02260 Put the pointers to the lhs and the rhs in the pointer workspace
02261 */
02262 WantAddPointers(2*numsub);
02263 lhs = AT.pWorkPointer;
02264 rhs = lhs+numsub;
02265 AT.pWorkPointer = rhs+numsub;
02266 f = t + FUNHEAD; l = left+1;
02267 for ( i = 0; i < numsub; i++ ) {
02268     AT.pWorkSpace[lhs+i] = l; l += l[1];
02269     NEXTARG(f);
02270     AT.pWorkSpace[rhs+i] = f;
02271     NEXTARG(f);
02272 }
02273 /*
02274 Take out the patterns and replace them by SUBEXPRESSIONs pointing at
02275 the e buffer. We put the resulting term above the left sides.
02276 Note that we take out only the first id_ if there is more than one!
02277 */
02278 first = 1;
02279 t = term+1; newterm = AT.WorkPointer; out = newterm+1;
02280 while ( t < tstop ) {
02281     if ( *t == IDFUNCTION && first ) { first = 0; t += t[1]; continue; }
02282     if ( *t >= FUNCTION ) {
02283         for ( i = 0; i < numsub; i++ ) {
02284             m = AT.pWorkSpace[lhs+i];
02285             if ( *m != *t ) continue;
02286             for ( j = 1; j < t[1]; j++ ) {
02287                 if ( m[j] != t[j] ) break;
02288             }
02289             if ( j != t[1] ) continue;
02290             numfound++;
02291         }
02292         /*
02293         We have a match! Set up a SUBEXPRESSION subterm and put the
02294         corresponding rhs in the eBuffer.
02295         */
02296         PutInBuffers(1)
02297         t += t[1];
02298     }
02299     if ( i == numsub ) { /* no match. Just copy to output. */
02300         j = t[1]; NCOPY(out,t,j)
02301     }
02302     else if ( *t == SYMBOL ) {
02303         for ( i = 0; i < numsub; i++ ) {
02304             m = AT.pWorkSpace[lhs+i];
02305             if ( *m != SYMBOL ) continue;
02306             for ( ii = 2; ii < t[1]; ii += 2 ) {
02307                 if ( m[2] != t[ii] ) continue;
02308                 pow = t[ii+1]/m[3];
02309                 if ( pow <= 0 ) continue;
02310                 t[ii+1] = t[ii+1]*m[3];
02311                 numfound++;
02312             }
02313             /*
02314             Create the proper rhs in the eBuffer and set up a
02315             SUBEXPRESSION subterm.
02316             */
02317             PutInBuffers(pow)
02318         }
02319     }
02320     /*
02321     Now we copy whatever remains of the SYMBOL subterm to the output
02322     */
02323     m = out; *out++ = t[0]; *out++ = t[1];
02324     for ( ii = 2; ii < t[1]; ii += 2 ) {
02325         if ( t[ii+1] ) { *out++ = t[ii]; *out++ = t[ii+1]; }
02326     }
02327     m[1] = out-m;
02328     if ( m[1] == 2 ) out = m;
02329     t += t[1];
02330     }
02331     else if ( *t == DOTPRODUCT ) {
02332         for ( i = 0; i < numsub; i++ ) {
02333             m = AT.pWorkSpace[lhs+i];
02334             if ( *m != DOTPRODUCT ) continue;
02335             for ( ii = 2; ii < t[1]; ii += 3 ) {
02336                 if ( m[2] != t[ii] || m[3] != t[ii+1] ) continue;
02337                 pow = t[ii+2]/m[4];
02338                 if ( pow <= 0 ) continue;
02339                 t[ii+2] = t[ii+2]*m[4];

```

```

02340 /*
02341             Create the proper rhs in the eBuffer and set up a
02342             SUBEXPRESSION subterm.
02343 */
02344             PutInBuffers(pow)
02345         }
02346     }
02347 /*
02348             Now we copy whatever remains of the DOTPRODUCT subterm to the output
02349 */
02350     m = out; *out++ = t[0]; *out++ = t[1];
02351     for ( ii = 2; ii < t[1]; ii += 3 ) {
02352         if ( t[ii+2] ) { *out++ = t[ii]; *out++ = t[ii+1]; *out++ = t[ii+2]; }
02353     }
02354     m[1] = out-m;
02355     if ( m[1] == 2 ) out = m;
02356     t += t[1];
02357 }
02358 else {
02359     j = t[1]; NCOPY(out,t,j)
02360 }
02361 }
02362 /*
02363             Copy the coefficient and set the size.
02364 */
02365     t = tstop; r = term*term; while ( t < r ) *out++ = *t++;
02366     *newterm = out-newterm;
02367 /*
02368             Finally we move the new term over the original term.
02369 */
02370     i = *newterm;
02371     t = term; r = newterm; NCOPY(t,r,i)
02372 /*
02373             At this point we can return and if the calling Generator jumps back to
02374             its start, TestSub can take care of the expansions of SUBEXPRESSIONs.
02375 */
02376     AT.pWorkPointer = lhs;
02377     AT.WorkPointer = t;
02378     return(numfound);
02379 noaction:
02380     return(0);
02381 }
02382
02383 /*
02384             #] TakeIDfunction :
02385             #] Patterns :
02386 */
02387

```

4.103 poly.cc

```

00001 /* @file poly.cc
00002 *
00003 * Contains the class for representing sparse multivariate
00004 * polynomials with integer coefficients
00005 */
00006 /* #] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #] License : */
00032 /*

```

```

00033     #[ includes :
00034 */
00035
00036 #include "poly.h"
00037 #include "polygcd.h"
00038
00039 #include <cassert>
00040 #include <cctype>
00041 #include <cmath>
00042 #include <algorithm>
00043 #include <map>
00044 #include <iostream>
00045
00046 using namespace std;
00047
00048 /*
00049     #] includes :
00050     #[ constructor (small constant polynomial) :
00051 */
00052
00053 // constructor for a small constant polynomial
00054 poly::poly (PHEAD int a, WORD modp, WORD modn):
00055     size_of_terms(AM.MaxTer/(LONG) sizeof(WORD)),
00056     modp(0),
00057     modn(1)
00058 {
00059     POLY_STOREIDENTITY;
00060
00061     terms = TermMalloc("poly::poly(int)");
00062
00063     if (a == 0) {
00064         terms[0] = 1; // length
00065     }
00066     else {
00067         terms[0] = 4 + AN.poly_num_vars; // length
00068         terms[1] = 3 + AN.poly_num_vars; // length
00069         for (int i=0; i<AN.poly_num_vars; i++) terms[2+i] = 0; // powers
00070         terms[2+AN.poly_num_vars] = ABS(a); // coefficient
00071         terms[3+AN.poly_num_vars] = a>0 ? 1 : -1; // length coefficient
00072     }
00073
00074     if (modp!=-1) setmod(modp,modn);
00075 }
00076
00077 /*
00078     #] constructor (small constant polynomial) :
00079     #[ constructor (large constant polynomial) :
00080 */
00081
00082 // constructor for a large constant polynomial
00083 poly::poly (PHEAD const UWORD *a, WORD na, WORD modp, WORD modn):
00084     size_of_terms(AM.MaxTer/(LONG) sizeof(WORD)),
00085     modp(0),
00086     modn(1)
00087 {
00088     POLY_STOREIDENTITY;
00089
00090     terms = TermMalloc("poly::poly(UWORD*,WORD)");
00091
00092     // remove leading zeros
00093     while (*(a+ABS(na)-1)==0)
00094         na -= SGN(na);
00095
00096     terms[0] = 3 + AN.poly_num_vars + ABS(na); // length
00097     terms[1] = terms[0] - 1; // length
00098     for (int i=0; i<AN.poly_num_vars; i++) terms[2+i] = 0; // powers
00099     termscopy((WORD *)a, 2+AN.poly_num_vars, ABS(na)); // coefficient
00100     terms[2+AN.poly_num_vars+ABS(na)] = na; // length coefficient
00101
00102     if (modp!=-1) setmod(modp,modn);
00103 }
00104
00105 /*
00106     #] constructor (large constant polynomial) :
00107     #[ constructor (deep copy polynomial) :
00108 */
00109
00110 // copy constructor: makes a deep copy of a polynomial
00111 poly::poly (const poly &a, WORD modp, WORD modn):
00112     size_of_terms(AM.MaxTer/(LONG) sizeof(WORD))
00113 {
00114     #ifdef POLY_MOVE_DEBUG
00115         std::cout << "poly copy ctor" << std::endl;
00116     #endif
00117     POLY_GETIDENTITY(a);
00118     POLY_STOREIDENTITY;
00119 }

```

```

00120     terms = TermMalloc("poly::poly(poly&)");
00121
00122     *this = a;
00123
00124     if (modp!= -1) setmod(modp,modn);
00125 }
00126
00127 /*
00128  #] constructor (deep copy polynomial) :
00129  #[ destructor :
00130  */
00131
00132 // destructor
00133 poly::~poly () {
00134
00135     POLY_GETIDENTITY(*this);
00136
00137     if (size_of_terms == AM.MaxTer/(LONG)sizeof(WORD))
00138         TermFree(terms, "poly::~poly");
00139     else
00140         M_free(terms, "poly::~poly");
00141 }
00142
00143 /*
00144  #] destructor :
00145  #[ expand_memory :
00146  */
00147
00148 // expands the memory allocated for terms to at least twice its size
00149 void poly::expand_memory (int i) {
00150
00151     POLY_GETIDENTITY(*this);
00152
00153     LONG new_size_of_terms = MaX(2*size_of_terms, i);
00154     if (new_size_of_terms > MAXPOSITIVE) {
00155         MLOCK(ErrorMessageLock);
00156         MesPrint ((char*)"ERROR: polynomials too large (> WORDSIZE)");
00157         MUNLOCK(ErrorMessageLock);
00158         Terminate(1);
00159     }
00160
00161     WORD *newterms = (WORD *)Malloc1(new_size_of_terms * sizeof(WORD), "poly::expand_memory");
00162     WCOPY(newterms, terms, size_of_terms);
00163
00164     if (size_of_terms == AM.MaxTer/(LONG)sizeof(WORD))
00165         TermFree(terms, "poly::expand_memory");
00166     else
00167         M_free(terms, "poly::expand_memory");
00168
00169     terms = newterms;
00170     size_of_terms = new_size_of_terms;
00171 }
00172
00173 /*
00174  #] expand_memory :
00175  #[ setmod :
00176  */
00177
00178 // sets the coefficient space to ZZ/p^n
00179 void poly::setmod(WORD _modp, WORD _modn) {
00180
00181     POLY_GETIDENTITY(*this);
00182
00183     if (_modp>0 && (_modp!=modp || _modn<modn)) {
00184         modp = _modp;
00185         modn = _modn;
00186
00187         WORD nmodq=0;
00188         UWORD *modq=NULL;
00189         bool smallq;
00190
00191         if (modn == 1) {
00192             modq = (UWORD *)&modp;
00193             nmodq = 1;
00194             smallq = true;
00195         }
00196         else {
00197             RaisPowCached(BHEAD modp,modn,&modq,&nmodq);
00198             smallq = false;
00199         }
00200
00201         coefficients_modulo(modq,nmodq,smallq);
00202     }
00203     else {
00204         modp = _modp;
00205         modn = _modn;
00206     }

```

```

00207 }
00208
00209 /*
00210     #] setmod :
00211     #[ coefficients_modulo :
00212 */
00213
00214 // reduces all coefficients of the polynomial modulo a
00215 void poly::coefficients_modulo (UWORD *a, WORD na, bool small) {
00216     POLY_GETIDENTITY(*this);
00217
00218     int j=1;
00219     for (int i=1, di; i<terms[0]; i+=di) {
00220         di = terms[i];
00221
00222         if (i!=j)
00223             for (int k=0; k<di; k++)
00224                 terms[j+k] = terms[i+k];
00225
00226         WORD n = terms[j+terms[j]-1];
00227
00228         if (ABS(n)==1 && small) {
00229             // small number modulo small number
00230             terms[j+1+AN.poly_num_vars] = n*((UWORD)terms[j+1+AN.poly_num_vars] % a[0]);
00231             if (terms[j+1+AN.poly_num_vars] == 0)
00232                 n=0;
00233             else {
00234                 if (terms[j+1+AN.poly_num_vars] > +(WORD)a[0]/2) terms[j+1+AN.poly_num_vars]-=a[0];
00235                 if (terms[j+1+AN.poly_num_vars] < -(WORD)a[0]/2) terms[j+1+AN.poly_num_vars]+=a[0];
00236                 n = SGN(terms[j+1+AN.poly_num_vars]);
00237                 terms[j+1+AN.poly_num_vars] = ABS(terms[j+1+AN.poly_num_vars]);
00238             }
00239         }
00240         else
00241             TakeNormalModulus((UWORD *)&terms[j+1+AN.poly_num_vars], &n, a, na, NOUNPACK);
00242
00243         if (n!=0) {
00244             terms[j] = 2+AN.poly_num_vars+ABS(n);
00245             terms[j+terms[j]-1] = n;
00246             j += terms[j];
00247         }
00248     }
00249     terms[0] = j;
00250 }
00251
00252 }
00253
00254 /*
00255     #] coefficients_modulo :
00256     #[ to_string :
00257 */
00258
00259 // converts an integer to a string
00260 const string int_to_string (WORD x) {
00261     char res[41];
00262     snprintf (res, 41, "%i",x);
00263     return res;
00264 }
00265
00266 // converts a polynomial to a string
00267 const string poly::to_string() const {
00268     POLY_GETIDENTITY(*this);
00269
00270     string res;
00271
00272     int printtimes;
00273     UBYTE *scoeff = (UBYTE *)NumberMalloc("poly::to_string");
00274
00275     if (terms[0]==1)
00276         // zero
00277         res = "0";
00278     else {
00279         for (int i=1; i<terms[0]; i+=terms[i]) {
00280             // sign
00281             WORD ncoeff = terms[i+terms[i]-1];
00282             if (ncoeff < 0) {
00283                 ncoeff*=-1;
00284                 res += "-";
00285             }
00286             else {
00287                 if (i>1) res += "+";
00288             }
00289
00290             if (ncoeff==1 && terms[i+terms[i]-1-ncoeff]==1) {
00291                 // coeff=1, so don't print coefficient and '*'

```



```

00294         printtimes = 0;
00295     }
00296     else {
00297         // print coefficient
00298         PRTLong((UWORD*)&terms[i+terms[i]-1-ncoeff], ncoeff, scoeff);
00299         res += string((char *)scoeff);
00300         printtimes=1;
00301     }
00302
00303     // print variables
00304     for (int j=0; j<AN.poly_num_vars; j++) {
00305         if (terms[i+1+j] > 0) {
00306             if (printtimes) res += "*";
00307             res += string(1, 'a'+j);
00308             if (terms[i+1+j] > 1) res += "^" + int_to_string(terms[i+1+j]);
00309             printtimes = 1;
00310         }
00311     }
00312
00313     // iff coeff=1 and all power=0, print '1' after all
00314     if (!printtimes) res += "1";
00315 }
00316 }
00317
00318 // eventual modulo
00319 if (modp>0) {
00320     res += " (mod ";
00321     res += int_to_string(modp);
00322     if (modn>1) {
00323         res += "^";
00324         res += int_to_string(modn);
00325     }
00326     res += ")";
00327 }
00328
00329 NumberFree(scoeff, "poly::to_string");
00330
00331 return res;
00332 }
00333
00334 /*
00335 #] to_string :
00336 #[ ostream operator :
00337 */
00338
00339 // output stream operator
00340 ostream& operator<< (ostream &out, const poly &a) {
00341     return out << a.to_string();
00342 }
00343
00344 /*
00345 #] ostream operator :
00346 #[ monomial_compare :
00347 */
00348
00349 // compares two monomials (0:equal, <0:a smaller, >0:b smaller)
00350 int poly::monomial_compare (PHEAD const WORD *a, const WORD *b) {
00351     for (int i=0; i<AN.poly_num_vars; i++)
00352         if (a[i+1]!=b[i+1]) return a[i+1]-b[i+1];
00353     return 0;
00354 }
00355
00356 /*
00357 #] monomial_compare :
00358 #[ normalize :
00359 */
00360
00361 // brings a polynomial to normal form
00362 const poly & poly::normalize() {
00363
00364     POLY_GETIDENTITY(*this);
00365
00366     WORD nmodq=0;
00367     UWORD *modq=NULL;
00368
00369     if (modp!=0) {
00370         if (modn == 1) {
00371             modq = (UWORD *)&modp;
00372             nmodq = 1;
00373         }
00374         else {
00375             RaisPowCached(BHEAD modp, modn, &modq, &nmodq);
00376         }
00377     }
00378
00379     // find and sort all monomials
00380     // terms[0]/num_vars+3 is an upper bound for number of terms in a

```

```

00381
00382     LONG poffset = AT.pWorkPointer;
00383     WantAddPointers((terms[0]/(AN.poly_num_vars+3)));
00384     AT.pWorkPointer += terms[0]/(AN.poly_num_vars+3);
00385     #define p (&(AT.pWorkspace[poffset]))
00386
00387 // WORD **p = (WORD **)Malloc1(terms[0]/(AN.poly_num_vars+3) * sizeof(WORD*), "poly::normalize");
00388
00389     int nterms = 0;
00390     for (int i=1; i<terms[0]; i+=terms[i])
00391         p[nterms++] = terms + i;
00392
00393     sort(p, p + nterms, monomial_larger(BHEAD0));
00394
00395     WORD *tmp;
00396     if (size_of_terms == AM.MaxTer/(LONG)sizeof(WORD)) {
00397         tmp = (WORD *)TermMalloc("poly::normalize");
00398     }
00399     else {
00400         tmp = (WORD *)Malloc1(size_of_terms * sizeof(WORD), "poly::normalize");
00401     }
00402     int j=1;
00403     int prevj=0;
00404     tmp[0]=0;
00405     tmp[1]=0;
00406
00407     for (int i=0; i<nterms; i++) {
00408         if (i>0 && monomial_compare(BHEAD &tmp[j], p[i])=0) {
00409             // duplicate term, so add coefficients
00410             WORD ncoeff = tmp[j+tmp[j]-1];
00411             AddLong((UWORD *)&tmp[j+1+AN.poly_num_vars], ncoeff,
00412                 (UWORD *)&p[i][1+AN.poly_num_vars], p[i][p[i][0]-1],
00413                 (UWORD *)&tmp[j+1+AN.poly_num_vars], &ncoeff);
00414
00415             tmp[j+1+AN.poly_num_vars+ABS(ncoeff)] = ncoeff;
00416             tmp[j] = 2+AN.poly_num_vars+ABS(ncoeff);
00417         }
00418         else {
00419             // new term
00420             prevj = j;
00421             j += tmp[j];
00422             WCOPY(&tmp[j],p[i],p[i][0]);
00423         }
00424
00425         if (modp!=0) {
00426             // bring coefficient to normal form mod p^n
00427             WORD ntmp = tmp[j+tmp[j]-1];
00428             TakeNormalModulus((UWORD *)&tmp[j+1+AN.poly_num_vars], &ntmp,
00429                 modq,nmodq, NOUNPACK);
00430
00431             tmp[j] = 2+AN.poly_num_vars+ABS(ntmp);
00432             tmp[j+tmp[j]-1] = ntmp;
00433         }
00434
00435         // add terms to polynomial
00436         if (tmp[j+tmp[j]-1]==0) {
00437             tmp[j]=0;
00438             j=prevj;
00439         }
00440
00441         j+=tmp[j];
00442
00443         tmp[0] = j;
00444         WCOPY(terms,tmp,tmp[0]);
00445
00446 // M_free(p, "poly::normalize");
00447
00448         if (size_of_terms == AM.MaxTer/(LONG)sizeof(WORD))
00449             TermFree(tmp, "poly::normalize");
00450         else
00451             M_free(tmp, "poly::normalize");
00452
00453         AT.pWorkPointer = poffset;
00454         #undef p
00455
00456         return *this;
00457     }
00458
00459 /*
00460     #] normalize :
00461     #[ last_monomial_index :
00462 */
00463
00464 // index of the last monomial, i.e., the constant term
00465 WORD poly::last_monomial_index () const {
00466     POLY_GETIDENTITY(*this);
00467     return terms[0] - ABS(terms[terms[0]-1]) - AN.poly_num_vars - 2;

```

```

00468 }
00469
00470
00471 // pointer to the last monomial (the constant term)
00472 WORD * poly::last_monomial () const {
00473     return &terms[last_monomial_index()];
00474 }
00475
00476 /*
00477     #] last_monomial_index :
00478     #[ compare_degree_vector :
00479 */
00480
00481 int poly::compare_degree_vector(const poly & b) const {
00482     POLY_GETIDENTITY(*this);
00483
00484     // special cases if one or both are 0
00485     if (terms[0] == 1 && b[0] == 1) return 0;
00486     if (terms[0] == 1) return -1;
00487     if (b[0] == 1) return 1;
00488
00489     for (int i = 0; i < AN.poly_num_vars; i++) {
00490         int d1 = degree(i);
00491         int d2 = b.degree(i);
00492         if (d1 != d2) return d1 - d2;
00493     }
00494
00495     return 0;
00496 }
00497
00498 /*
00499     #] compare_degree_vector :
00500     #[ degree_vector :
00501 */
00502
00503 std::vector<int> poly::degree_vector() const {
00504     POLY_GETIDENTITY(*this);
00505
00506     std::vector<int> degrees(AN.poly_num_vars);
00507     for (int i = 0; i < AN.poly_num_vars; i++) {
00508         degrees[i] = degree(i);
00509     }
00510
00511     return degrees;
00512 }
00513
00514 /*
00515     #] degree_vector :
00516     #[ compare_degree_vector :
00517 */
00518
00519 int poly::compare_degree_vector(const vector<int> & b) const {
00520     POLY_GETIDENTITY(*this);
00521
00522     if (terms[0] == 1) return -1;
00523
00524     for (int i = 0; i < AN.poly_num_vars; i++) {
00525         int d1 = degree(i);
00526         if (d1 != b[i]) return d1 - b[i];
00527     }
00528
00529     return 0;
00530 }
00531
00532 /*
00533     #] compare_degree_vector :
00534     #[ add :
00535 */
00536
00537 // addition of polynomials by merging
00538 void poly::add (const poly &a, const poly &b, poly &c) {
00539     POLY_GETIDENTITY(a);
00540
00541     c.modp = a.modp;
00542     c.modn = a.modn;
00543
00544     WORD nmodq=0;
00545     UWORD *modq=NULL;
00546
00547     bool both_mod_small=false;
00548
00549     if (c.modp!=0) {
00550         if (c.modn == 1) {
00551             modq = (UWORD *)&c.modp;
00552             nmodq = 1;
00553             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)

```

```

00555         both_mod_small=true;
00556     }
00557     else {
00558         RaisPowCached(BHEAD c.modp, c.modn, &modq, &nmodq);
00559     }
00560 }
00561
00562 int ai=1, bi=1, ci=1;
00563
00564 while (ai<a[0] || bi<b[0]) {
00565
00566     c.check_memory(ci);
00567
00568     int cmp = ai<a[0] && bi<b[0] ? monomial_compare(BHEAD &a[ai], &b[bi]) : 0;
00569
00570     if (bi==b[0] || cmp>0) {
00571         // insert term from a
00572         c.termscopy(&a[ai], ci, a[ai]);
00573         ci+=a[ai];
00574         ai+=a[ai];
00575     }
00576     else if (ai==a[0] || cmp<0) {
00577         // insert term from b
00578         c.termscopy(&b[bi], ci, b[bi]);
00579         ci+=b[bi];
00580         bi+=b[bi];
00581     }
00582     else {
00583         // insert term from a+b
00584         c.termscopy(&a[ai], ci, MaX(a[ai], b[bi]));
00585         WORD nc=0;
00586         if (both_mod_small) {
00587             c[ci+1+AN.poly_num_vars] = ((LONG)a[ai+1+AN.poly_num_vars]*a[ai+a[ai]-1]+
00588 (LONG)b[bi+1+AN.poly_num_vars]*b[bi+b[bi]-1]) % c.modp;
00589             if ((WORD)c[ci+1+AN.poly_num_vars] > +c.modp/2) c[ci+1+AN.poly_num_vars] -= c.modp;
00590             if ((WORD)c[ci+1+AN.poly_num_vars] < -c.modp/2) c[ci+1+AN.poly_num_vars] += c.modp;
00591             nc = (c[ci+1+AN.poly_num_vars]==0 ? 0 : SGN((WORD)c[ci+1+AN.poly_num_vars]));
00592             c[ci+1+AN.poly_num_vars] = ABS((WORD)c[ci+1+AN.poly_num_vars]);
00593         }
00594         else {
00595             AddLong((UWORD *)&a[ai+1+AN.poly_num_vars], a[ai+a[ai]-1],
00596 (UWORD *)&b[bi+1+AN.poly_num_vars], b[bi+b[bi]-1],
00597 (UWORD *)&c[ci+1+AN.poly_num_vars], &nc);
00598             if (c.modp!=0) TakeNormalModulus((UWORD *)&c[ci+1+AN.poly_num_vars], &nc,
00599 modq, nmodq,
NOUNPACK);
00600         }
00601
00602         if (nc!=0) {
00603             c[ci] = 2+AN.poly_num_vars+ABS(nc);
00604             c[ci+c[ci]-1] = nc;
00605             ci += c[ci];
00606         }
00607
00608         ai+=a[ai];
00609         bi+=b[bi];
00610     }
00611 }
00612
00613 c[0]=ci;
00614 }
00615
00616 /*
00617 #] add :
00618 #[ sub :
00619 */
00620
00621 // subtraction of polynomials by merging
00622 void poly::sub (const poly &a, const poly &b, poly &c) {
00623
00624     POLY_GETIDENTITY(a);
00625
00626     c.modp = a.modp;
00627     c.modn = a.modn;
00628
00629     WORD nmodq=0;
00630     UWORD *modq=NULL;
00631
00632     bool both_mod_small=false;
00633
00634     if (c.modp!=0) {
00635         if (c.modn == 1) {
00636             modq = (UWORD *)&c.modp;
00637             nmodq = 1;
00638             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)

```

```

00639         both_mod_small=true;
00640     }
00641     else {
00642         RaisPowCached(BHEAD c.modp,c.modn,&modq,&nmodq);
00643     }
00644 }
00645
00646 int ai=1,bi=1,ci=1;
00647
00648 while (ai<a[0] || bi<b[0]) {
00649
00650     c.check_memory(ci);
00651
00652     int cmp = ai<a[0] && bi<b[0] ? monomial_compare(BHEAD &a[ai],&b[bi]) : 0;
00653
00654     if (bi==b[0] || cmp>0) {
00655         // insert term from a
00656         c.termscopy(&a[ai],ci,a[ai]);
00657         ci+=a[ai];
00658         ai+=a[ai];
00659     }
00660     else if (ai==a[0] || cmp<0) {
00661         // insert term from b
00662         c.termscopy(&b[bi],ci,b[bi]);
00663         ci+=b[bi];
00664         bi+=b[bi];
00665         c[ci-1]*=-1;
00666     }
00667     else {
00668         // insert term from a+b
00669         c.termscopy(&a[ai],ci,MaX(a[ai],b[bi]));
00670         WORD nc=0;
00671         if (both_mod_small) {
00672             c[ci+1+AN.poly_num_vars] = ((LONG)a[ai+1+AN.poly_num_vars]*a[ai+a[ai]-1]-
00673 (LONG)b[bi+1+AN.poly_num_vars]*b[bi+b[bi]-1]) % c.modp;
00674             if ((WORD)c[ci+1+AN.poly_num_vars] > +c.modp/2) c[ci+1+AN.poly_num_vars] -= c.modp;
00675             if ((WORD)c[ci+1+AN.poly_num_vars] < -c.modp/2) c[ci+1+AN.poly_num_vars] += c.modp;
00676             nc = (c[ci+1+AN.poly_num_vars]==0 ? 0 : SGN((WORD)c[ci+1+AN.poly_num_vars]));
00677             c[ci+1+AN.poly_num_vars] = ABS((WORD)c[ci+1+AN.poly_num_vars]);
00678         }
00679         else {
00680             AddLong((UWORD *)&a[ai+1+AN.poly_num_vars], a[ai+a[ai]-1],
00681 (UWORD *)&b[bi+1+AN.poly_num_vars],-b[bi+b[bi]-1], // -b[...] causes
00682 subtraction
00683 (UWORD *)&c[ci+1+AN.poly_num_vars], &nc);
00684             if (c.modp!=0) TakeNormalModulus((UWORD *)&c[ci+1+AN.poly_num_vars], &nc,
00685 modq, nmodq,
00686 NOUNPACK);
00687         }
00688
00689         if (nc!=0) {
00690             c[ci] = 2+AN.poly_num_vars+ABS(nc);
00691             c[ci+c[ci]-1] = nc;
00692             ci += c[ci];
00693         }
00694         ai+=a[ai];
00695         bi+=b[bi];
00696     }
00697 }
00698 c[0]=ci;
00699 }
00700
00701 /*
00702 #] sub :
00703 #[ pop_heap :
00704 */
00705
00706 // pops the largest monomial from the heap and stores it in heap[n]
00707 void poly::pop_heap (PHEAD WORD **heap, int n) {
00708
00709     WORD *old = heap[0];
00710
00711     heap[0] = heap[--n];
00712
00713     int i=0;
00714     while (2*i+2<n && (monomial_compare(BHEAD heap[2*i+1]+3, heap[i]+3)>0 ||
00715 monomial_compare(BHEAD heap[2*i+2]+3, heap[i]+3)>0)) {
00716
00717         if (monomial_compare(BHEAD heap[2*i+1]+3, heap[2*i+2]+3)>0) {
00718             swap(heap[i], heap[2*i+1]);
00719             i=2*i+1;
00720         }
00721         else {

```

```

00722         swap(heap[i], heap[2*i+2]);
00723         i=2*i+2;
00724     }
00725 }
00726
00727 if (2*i+1<n && monomial_compare(BHEAD heap[2*i+1]+3, heap[i]+3)>0)
00728     swap(heap[i], heap[2*i+1]);
00729
00730 heap[n] = old;
00731 }
00732
00733 /*
00734  #] pop_heap :
00735  #[ push_heap :
00736 */
00737
00738 // pushes the monomial in heap[n] onto the heap
00739 void poly::push_heap (PHEAD WORD **heap, int n) {
00740
00741     int i=n-1;
00742
00743     while (i>0 && monomial_compare(BHEAD heap[i]+3, heap[(i-1)/2]+3) > 0) {
00744         swap(heap[(i-1)/2], heap[i]);
00745         i=(i-1)/2;
00746     }
00747 }
00748
00749 /*
00750  #] push_heap :
00751  #[ mul_one_term :
00752 */
00753
00754 // multiplies a polynomial with a monomial
00755 void poly::mul_one_term (const poly &a, const poly &b, poly &c) {
00756
00757     POLY_GETIDENTITY(a);
00758
00759     int ci=1;
00760
00761     WORD nmodq=0;
00762     UWORD *modq=NULL;
00763
00764     bool both_mod_small=false;
00765
00766     if (c.modp!=0) {
00767         if (c.modn == 1) {
00768             modq = (UWORD *)&c.modp;
00769             nmodq = 1;
00770             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)
00771                 both_mod_small=true;
00772         }
00773         else {
00774             RaisPowCached(BHEAD c.modp, c.modn, &modq, &nmodq);
00775         }
00776     }
00777
00778     for (int ai=1; ai<a[0]; ai+=a[ai])
00779         for (int bi=1; bi<b[0]; bi+=b[bi]) {
00780
00781             c.check_memory(ci);
00782
00783             for (int i=0; i<AN.poly_num_vars; i++)
00784                 c[ci+1+i] = a[ai+1+i] + b[bi+1+i];
00785             WORD nc;
00786
00787             // if both polynomials are modulo p^1, use integer calculus
00788             if (both_mod_small) {
00789                 c[ci+1+AN.poly_num_vars] =
00790                     ((LONG)a[ai+1+AN.poly_num_vars] * a[ai+2+AN.poly_num_vars] *
00791                      b[bi+1+AN.poly_num_vars] * b[bi+2+AN.poly_num_vars]) % c.modp;
00792                 nc = (c[ci+1+AN.poly_num_vars]==0 ? 0 : 1);
00793             }
00794             else {
00795                 // otherwise, use form long calculus
00796                 MulLong((UWORD *)&a[ai+1+AN.poly_num_vars], a[ai+a[ai]-1],
00797                        (UWORD *)&b[bi+1+AN.poly_num_vars], b[bi+b[bi]-1],
00798                        (UWORD *)&c[ci+1+AN.poly_num_vars], &nc);
00799                 if (c.modp!=0) TakeNormalModulus((UWORD *)&c[ci+1+AN.poly_num_vars], &nc,
00800                                                  modq, nmodq,
00801
00802 NOUNPACK);
00803             }
00804
00805             if (nc!=0) {
00806                 c[ci] = 2+AN.poly_num_vars+ABS(nc);
00807                 ci += c[ci];
00808
00809                 if (both_mod_small) {

```

```

00808             if (c[ci-2] > +c.modp/2) c[ci-2] -= c.modp;
00809             if (c[ci-2] < -c.modp/2) c[ci-2] += c.modp;
00810             c[ci-1] = SGN(c[ci-2]);
00811             c[ci-2] = ABS(c[ci-2]);
00812         }
00813         else {
00814             c[ci-1] = nc;
00815         }
00816     }
00817 }
00818
00819 c[0]=ci;
00820 }
00821
00822 /*
00823  #] mul_one_term :
00824  #[ mul_univar :
00825  */
00826
00827 // dense univariate multiplication, i.e., for each power find all
00828 // pairs of monomials that result in that power
00829 void poly::mul_univar (const poly &a, const poly &b, poly &c, int var) {
00830
00831     POLY_GETIDENTITY(a);
00832
00833     WORD nmodq=0;
00834     UWORD *modq=NULL;
00835
00836     bool both_mod_small=false;
00837
00838     if (c.modp!=0) {
00839         if (c.modn == 1) {
00840             modq = (UWORD *)&c.modp;
00841             nmodq = 1;
00842             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)
00843                 both_mod_small=true;
00844         }
00845         else {
00846             RaisPowCached(BHEAD c.modp, c.modn, &modq, &nmodq);
00847         }
00848     }
00849
00850     poly t(BHEAD 0);
00851     WORD nt;
00852
00853     int ci=1;
00854
00855     // bounds on the powers in a*b
00856     int minpow = AN.poly_num_vars==0 ? 0 : a.last_monomial()[1+var] + b.last_monomial()[1+var];
00857     int maxpow = AN.poly_num_vars==0 ? 0 : a[2+var]+b[2+var];
00858     int afirst=1, blast=1;
00859
00860     for (int pow=maxpow; pow>=minpow; pow--) {
00861
00862         c.check_memory(ci);
00863
00864         WORD nc=0;
00865
00866         // adjust range in a or b
00867         if (a[afirst+1+var] + b[blast+1+var] > pow) {
00868             if (blast+b[blast] < b[0])
00869                 blast+=b[blast];
00870             else
00871                 afirst+=a[afirst];
00872         }
00873
00874         // find terms that result in the correct power
00875         for (int ai=afirst, bi=blast; ai<a[0] && bi>=1;) {
00876
00877             int thispow = AN.poly_num_vars==0 ? 0 : a[ai+1+var] + b[bi+1+var];
00878
00879             if (thispow == pow) {
00880
00881                 // if both polynomials are modulo p^1, use integer calculus
00882                 if (both_mod_small) {
00883                     c[ci+1+AN.poly_num_vars] =
00884                         ((nc==0 ? 0 : (LONG)c[ci+1+AN.poly_num_vars] * nc) +
00885                         (LONG)a[ai+1+AN.poly_num_vars] * a[ai+2+AN.poly_num_vars] *
00886                         b[bi+1+AN.poly_num_vars] * b[bi+2+AN.poly_num_vars]) % c.modp;
00887                     nc = (c[ci+1+AN.poly_num_vars]==0 ? 0 : 1);
00888                 }
00889                 else {
00890                     // otherwise, use form long calculus
00891
00892                     MulLong((UWORD *)&a[ai+1+AN.poly_num_vars], a[ai+a[ai]-1],
00893                             (UWORD *)&b[bi+1+AN.poly_num_vars], b[bi+b[bi]-1],
00894                             (UWORD *)&t[0], &nt);

```

```

00895
00896         AddLong ((UWORD *)t[0], nt,
00897                 (UWORD *)&c[ci+1+AN.poly_num_vars], nc,
00898                 (UWORD *)&c[ci+1+AN.poly_num_vars], &nc);
00899
00900         if (c.modp!=0) TakeNormalModulus((UWORD *)&c[ci+1+AN.poly_num_vars], &nc,
00901                                         modq, nmodq,
NOUNPACK);
00902     }
00903
00904     ai += a[ai];
00905     bi -= ABS(b[bi-1]) + 2 + AN.poly_num_vars;
00906 }
00907 else if (thispow > pow)
00908     ai += a[ai];
00909 else
00910     bi -= ABS(b[bi-1]) + 2 + AN.poly_num_vars;
00911 }
00912
00913 // add term to result
00914 if (nc != 0) {
00915     for (int j=0; j<AN.poly_num_vars; j++)
00916         c[ci+1+j] = 0;
00917     if (AN.poly_num_vars > 0)
00918         c[ci+1+var] = pow;
00919
00920     c[ci] = 2+AN.poly_num_vars+ABS(nc);
00921     ci += c[ci];
00922
00923     // if necessary, adjust to range [-p/2,p/2]
00924     if (both_mod_small) {
00925         if (c[ci-2] > +c.modp/2) c[ci-2] -= c.modp;
00926         if (c[ci-2] < -c.modp/2) c[ci-2] += c.modp;
00927         c[ci-1] = SGN(c[ci-2]);
00928         c[ci-2] = ABS(c[ci-2]);
00929     }
00930     else {
00931         c[ci-1] = nc;
00932     }
00933 }
00934 }
00935
00936 c[0] = ci;
00937 }
00938
00939 /*
00940 #] mul_univar :
00941 #[ mul_heap :
00942 */
00943
00944 void poly::mul_heap (const poly &a, const poly &b, poly &c) {
00945
00946     POLY_GETIDENTITY(a);
00947
00948     WORD nmodq=0;
00949     UWORD *modq=NULL;
00950
00951     bool both_mod_small=false;
00952
00953     if (c.modp!=0) {
00954         if (c.modn == 1) {
00955             modq = (UWORD *)&c.modp;
00956             nmodq = 1;
00957             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)
00958                 both_mod_small=true;
00959         }
00960         else {
00961             RaisPowCached(BHEAD c.modp, c.modn, &modq, &nmodq);
00962         }
00963     }
00964
00965     // find maximum powers in different variables
00966     WORD *maxpower = AT.WorkPointer;
00967     AT.WorkPointer += AN.poly_num_vars;
00968     WORD *maxpowera = AT.WorkPointer;
00969     AT.WorkPointer += AN.poly_num_vars;
00970     WORD *maxpowerb = AT.WorkPointer;
00971     AT.WorkPointer += AN.poly_num_vars;
00972
00973     for (int i=0; i<AN.poly_num_vars; i++)
00974         maxpowera[i] = maxpowerb[i] = 0;
00975
00976     for (int ai=1; ai<a[0]; ai+=a[ai])
00977         for (int j=0; j<AN.poly_num_vars; j++)
00978             maxpowera[j] = MaX(maxpowera[j], a[ai+1+j]);
00979
00980     for (int bi=1; bi<b[0]; bi+=b[bi])

```



```

00998         for (int j=0; j<AN.poly_num_vars; j++)
00999             maxpowerb[j] = MaX(maxpowerb[j], b[bi+1+j]);
01000
01001     for (int i=0; i<AN.poly_num_vars; i++)
01002         maxpower[i] = maxpowera[i] + maxpowerb[i];
01003
01004     // if PROD(maxpower) small, use hash array
01005     bool use_hash = true;
01006     int nhash = 1;
01007
01008     for (int i=0; i<AN.poly_num_vars; i++) {
01009         if (nhash > POLY_MAX_HASH_SIZE / (maxpower[i]+1)) {
01010             nhash = 1;
01011             use_hash = false;
01012             break;
01013         }
01014         nhash *= maxpower[i]+1;
01015     }
01016
01017     // allocate heap and hash
01018     int nheap=a.number_of_terms();
01019
01020     WantAddPointers(nheap+nhash);
01021     WORD **heap = AT.pWorkSpace + AT.pWorkPointer;
01022
01023     for (int ai=1, i=0; ai<a[0]; ai+=a[ai], i++) {
01024         heap[i] = (WORD *) NumberMalloc("poly::mul_heap");
01025         heap[i][0] = ai;
01026         heap[i][1] = 1;
01027         heap[i][2] = -1;
01028         heap[i][3] = 0;
01029         for (int j=0; j<AN.poly_num_vars; j++)
01030             heap[i][4+j] = MAXPOSITIVE;
01031     }
01032
01033     WORD **hash = AT.pWorkSpace + AT.pWorkPointer + nheap;
01034     for (int i=0; i<nhash; i++)
01035         hash[i] = NULL;
01036
01037     int ci = 1;
01038
01039     // multiply
01040     while (nheap > 0) {
01041
01042         c.check_memory(ci);
01043
01044         pop_heap(BHEAD heap, nheap--);
01045         WORD *p = heap[nheap];
01046
01047         // if non-zero
01048         if (p[3] != 0) {
01049             if (use_hash) hash[p[2]] = NULL;
01050
01051             c[0] = ci;
01052
01053             // append this term to the result
01054             if (use_hash || ci==1 || monomial_compare(BHEAD p+3, c.last_monomial())!=0) {
01055                 p[4 + AN.poly_num_vars + ABS(p[3])] = p[3];
01056                 p[3] = 2 + AN.poly_num_vars + ABS(p[3]);
01057                 c.termscopy(&p[3],ci,p[3]);
01058                 ci += c[ci];
01059             }
01060             else {
01061                 // add this term to the last term of the result
01062                 ci = c.last_monomial_index();
01063                 WORD nc = c[ci+c[ci]-1];
01064
01065                 // if both polynomials are modulo p^1, use integer calculus
01066                 if (both_mod_small) {
01067                     c[ci+AN.poly_num_vars+1] = ((LONG)c[ci+AN.poly_num_vars+1]*nc +
01068 p[4+AN.poly_num_vars]*p[3]) % c.modp;
01069                     if (c[ci+1+AN.poly_num_vars]==0)
01070                         nc = 0;
01071                     else {
01072                         if (c[ci+1+AN.poly_num_vars] > +c.modp/2) c[ci+1+AN.poly_num_vars] -= c.modp;
01073                         if (c[ci+1+AN.poly_num_vars] < -c.modp/2) c[ci+1+AN.poly_num_vars] += c.modp;
01074                         nc = SGN(c[ci+1+AN.poly_num_vars]);
01075                         c[ci+1+AN.poly_num_vars] = ABS(c[ci+1+AN.poly_num_vars]);
01076                     }
01077                 }
01078                 else {
01079                     // otherwise, use form long calculus
01080                     AddLong ((UWORD *)&p[4+AN.poly_num_vars], p[3],
01081                             (UWORD *)&c[ci+AN.poly_num_vars+1], nc,
01082                             (UWORD *)&c[ci+AN.poly_num_vars+1],&nc);
01083
01084                     if (c.modp!=0) TakeNormalModulus((UWORD *)&c[ci+1+AN.poly_num_vars], &nc,

```

```

01084                                     modq, nmodq,
NOUNPACK);
01085     }
01086
01087     if (nc!=0) {
01088         c[ci] = 2 + AN.poly_num_vars + ABS(nc);
01089         ci += c[ci];
01090         c[ci-1] = nc;
01091     }
01092 }
01093 }
01094
01095 // add new term to the heap (ai, bi+1)
01096 while (p[1] < b[0]) {
01097
01098     for (int j=0; j<AN.poly_num_vars; j++)
01099         p[4+j] = a[p[0]+1+j] + b[p[1]+1+j];
01100
01101     // if both polynomials are modulo p^1, use integer calculus
01102     if (both_mod_small) {
01103         p[4+AN.poly_num_vars] = ((LONG)a[p[0]+1+AN.poly_num_vars]*a[p[0]+a[p[0]]-1]*
01104 b[p[1]+1+AN.poly_num_vars]*b[p[1]+b[p[1]]-1]) % c.modp;
01105         if (p[4+AN.poly_num_vars]==0)
01106             p[3]=0;
01107         else {
01108             if (p[4+AN.poly_num_vars] > +c.modp/2) p[4+AN.poly_num_vars] -= c.modp;
01109             if (p[4+AN.poly_num_vars] < -c.modp/2) p[4+AN.poly_num_vars] += c.modp;
01110             p[3] = SGN(p[4+AN.poly_num_vars]);
01111             p[4+AN.poly_num_vars] = ABS(p[4+AN.poly_num_vars]);
01112         }
01113     }
01114     else {
01115         // otherwise, use form long calculus
01116         MulLong ((UWORD *)&a[p[0]+1+AN.poly_num_vars], a[p[0]+a[p[0]]-1],
01117 (UWORD *)&b[p[1]+1+AN.poly_num_vars], b[p[1]+b[p[1]]-1],
01118 (UWORD *)&p[4+AN.poly_num_vars], &p[3]);
01119
01120         if (c.modp!=0) TakeNormalModulus((UWORD *)&p[4+AN.poly_num_vars], &p[3],
01121                                     modq, nmodq,
NOUNPACK);
01122     }
01123
01124     p[1] += b[p[1]];
01125
01126     if (use_hash) {
01127         int ID = 0;
01128         for (int i=0; i<AN.poly_num_vars; i++)
01129             ID = (maxpower[i]+1)*ID + p[4+i];
01130
01131         // if hash and unused, push onto heap
01132         if (hash[ID] == NULL) {
01133             p[2] = ID;
01134             hash[ID] = p;
01135             push_heap(BHEAD heap, ++nheap);
01136             break;
01137         }
01138         else {
01139             // if hash and used, add to heap element
01140             WORD *h = hash[ID];
01141             // if both polynomials are modulo p^1, use integer calculus
01142             if (both_mod_small) {
01143                 h[4+AN.poly_num_vars] = ((LONG)p[4+AN.poly_num_vars]*p[3] +
h[4+AN.poly_num_vars]*h[3]) % c.modp;
01144                 if (h[4+AN.poly_num_vars]==0)
01145                     h[3]=0;
01146                 else {
01147                     if (h[4+AN.poly_num_vars] > +c.modp/2) h[4+AN.poly_num_vars] -= c.modp;
01148                     if (h[4+AN.poly_num_vars] < -c.modp/2) h[4+AN.poly_num_vars] += c.modp;
01149                     h[3] = SGN(h[4+AN.poly_num_vars]);
01150                     h[4+AN.poly_num_vars] = ABS(h[4+AN.poly_num_vars]);
01151                 }
01152             }
01153             else {
01154                 // otherwise, use form long calculus
01155                 AddLong ((UWORD *)&p[4+AN.poly_num_vars], p[3],
01156 (UWORD *)&h[4+AN.poly_num_vars], h[3],
01157 (UWORD *)&h[4+AN.poly_num_vars], &h[3]);
01158
01159                 if (c.modp!=0) TakeNormalModulus((UWORD *)&h[4+AN.poly_num_vars], &h[3],
01160                                     modq, nmodq,
NOUNPACK);
01161             }
01162         }
01163     }
01164     else {
01165         // if no hash, push onto heap

```

```

01166         p[2] = -1;
01167         push_heap(BHEAD heap, ++nheap);
01168         break;
01169     }
01170 }
01171 }
01172
01173 c[0] = ci;
01174
01175 for (int ai=1, i=0; ai<a[0]; ai+=a[ai], i++)
01176     NumberFree(heap[i], "poly::mul_heap");
01177 AT.WorkPointer -= 3 * AN.poly_num_vars;
01178 }
01179
01180 /*
01181  #] mul_heap :
01182  #[ mul :
01183  */
01184
01195 void poly::mul (const poly &a, const poly &b, poly &c) {
01196
01197     c.modp = a.modp;
01198     c.modn = a.modn;
01199
01200     if (a.is_zero() || b.is_zero()) { c[0]=1; return; }
01201     if (a.is_one()) {
01202         c.check_memory(b[0]);
01203         c.termscopy(b.terms,0,b[0]);
01204         // normalize if necessary
01205         if (a.modp!=b.modp || a.modn!=b.modn) {
01206             c.modp=0;
01207             c.setmod(a.modp,a.modn);
01208         }
01209         return;
01210     }
01211     if (b.is_one()) {
01212         c.check_memory(a[0]);
01213         c.termscopy(a.terms,0,a[0]);
01214         return;
01215     }
01216
01217     int na=a.number_of_terms();
01218     int nb=b.number_of_terms();
01219
01220     if (na==1 || nb==1) {
01221         mul_one_term(a,b,c);
01222         return;
01223     }
01224
01225     int vara = a.is_dense_univariate();
01226     int varb = b.is_dense_univariate();
01227
01228     if (vara!=-2 && varb!=-2 && vara==varb) {
01229         mul_univar(a,b,c,vara);
01230         return;
01231     }
01232
01233     if (na < nb)
01234         mul_heap(a,b,c);
01235     else
01236         mul_heap(b,a,c);
01237 }
01238
01239 /*
01240  #] mul :
01241  #[ divmod_one_term : :
01242  */
01243
01244 // divides a polynomial by a monomial
01245 void poly::divmod_one_term (const poly &a, const poly &b, poly &q, poly &r, bool only_divides) {
01246
01247     POLY_GETIDENTITY(a);
01248
01249     int qi=1, ri=1;
01250
01251     WORD nmodq=0;
01252     UWORD *modq=NULL;
01253
01254     WORD nltbinv=0;
01255     UWORD *ltbinv=NULL;
01256
01257     bool both_mod_small=false;
01258
01259     if (q.modp!=0) {
01260         if (q.modn == 1) {
01261             modq = (UWORD *) &q.modp;
01262             nmodq = 1;

```

```

01263         if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)
01264             both_mod_small=true;
01265     }
01266     else {
01267         RaisPowCached(BHEAD q.modp,q.modn,&modq,&nmodq);
01268     }
01269     ltbinv = NumberMalloc("poly::div_one_term");
01270
01271     if (both_mod_small) {
01272         WORD ltb = b[b[1]]*b[2+AN.poly_num_vars];
01273         GetModInverses(ltb + (ltb<0?q.modp:0), q.modp, (WORD*)ltbinv, NULL);
01274         nltbinv = 1;
01275     }
01276     else
01277         GetLongModInverses(BHEAD (UWORD *)&b[2+AN.poly_num_vars], b[b[1]], modq, nmodq, ltbinv,
01278 &nltbinv, NULL, NULL);
01279 }
01280
01281 for (int ai=1; ai<a[0]; ai+=a[ai]) {
01282
01283     q.check_memory(qi);
01284     r.check_memory(ri);
01285
01286     // check divisibility of powers
01287     bool div=true;
01288     for (int j=0; j<AN.poly_num_vars; j++) {
01289         q[qi+1+j] = a[ai+1+j]-b[2+j];
01290         r[ri+1+j] = a[ai+1+j];
01291         if (q[qi+1+j] < 0) div=false;
01292     }
01293
01294     WORD nq,nr;
01295
01296     if (div) {
01297         // if variables are divisible, divide coefficient
01298         if (q.modp==0) {
01299             DivLong((UWORD *)&a[ai+1+AN.poly_num_vars], a[ai+a[ai]-1],
01300 (UWORD *)&b[2+AN.poly_num_vars], b[b[1]],
01301 (UWORD *)&q[qi+1+AN.poly_num_vars], &nq,
01302 (UWORD *)&r[ri+1+AN.poly_num_vars], &nr);
01303         }
01304         else {
01305             // if both polynomials are modulo p^1, use integer calculus
01306             if (both_mod_small) {
01307                 q[qi+1+AN.poly_num_vars] =
01308 (LONG)a[ai+1+AN.poly_num_vars] * a[ai+a[ai]-1] * ltbinv[0] * nltbinv) %
01309 q.modp;
01310                 nq = (q[qi+1+AN.poly_num_vars]==0 ? 0 : 1);
01311             }
01312             else {
01313                 // otherwise, use form long calculus
01314                 MulLong((UWORD *)&a[ai+1+AN.poly_num_vars], a[ai+a[ai]-1],
01315 ltbinv, nltbinv,
01316 (UWORD *)&q[qi+1+AN.poly_num_vars], &nq);
01317                 TakeNormalModulus((UWORD *)&q[qi+1+AN.poly_num_vars], &nq,
01318 modq,nmodq, NOUNPACK);
01319             }
01320             nr=0;
01321         }
01322     }
01323     else {
01324         // if not, term becomes part of the remainder
01325         nq=0;
01326         nr=a[ai+a[ai]-1];
01327         r.termscopy(&a[ai+1+AN.poly_num_vars], ri+1+AN.poly_num_vars, ABS(nr));
01328     }
01329
01330     // add terms to quotient/remainder
01331     if (nq!=0) {
01332         q[qi] = 2+AN.poly_num_vars+ABS(nq);
01333         qi += q[qi];
01334
01335         // if necessary, adjust to range [-p/2,p/2]
01336         if (both_mod_small) {
01337             if (q[qi-2] > +q.modp/2) q[qi-2] -= q.modp;
01338             if (q[qi-2] < -q.modp/2) q[qi-2] += q.modp;
01339             q[qi-1] = SGN(q[qi-2]);
01340             q[qi-2] = ABS(q[qi-2]);
01341         }
01342         else {
01343             q[qi-1] = nq;
01344         }
01345     }
01346
01347     if (nr != 0) {

```

```

01348         if (only_divides) { r = poly(BHEAD 1); ri=r[0]; break; }
01349         r[ri] = 2+AN.poly_num_vars+ABS(nr);
01350         ri += r[ri];
01351         r[ri-1] = nr;
01352     }
01353 }
01354
01355 q[0]=qi;
01356 r[0]=ri;
01357
01358 if (q.modp!=0 || ltbinv != NULL) NumberFree(ltbinv,"poly::div_one_term");
01359 }
01360
01361 /*
01362 #] divmod_one_term :
01363 #[ divmod_univar : :
01364 */
01365
01376 void poly::divmod_univar (const poly &a, const poly &b, poly &q, poly &r, int var, bool only_divides)
01377 {
01378     POLY_GETIDENTITY(a);
01379
01380     WORD nmodq=0;
01381     UWORD *modq=NULL;
01382
01383     WORD nltbinv=0;
01384     UWORD *ltbinv=NULL;
01385
01386     bool both_mod_small=false;
01387
01388     if (q.modp!=0) {
01389         if (q.modn == 1) {
01390             modq = (UWORD *) &q.modp;
01391             nmodq = 1;
01392             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)
01393                 both_mod_small=true;
01394         }
01395         else {
01396             RaisPowCached(BHEAD q.modp,q.modn,&modq,&nmodq);
01397         }
01398         ltbinv = NumberMalloc("poly::div_univar");
01399
01400         if (both_mod_small) {
01401             WORD ltb = b[b[1]]*b[2+AN.poly_num_vars];
01402             GetModInverses(ltb + (ltb<0?q.modp:0), q.modp, (WORD*)ltbinv, NULL);
01403             nltbinv = 1;
01404         }
01405         else
01406             GetLongModInverses(BHEAD (UWORD *) &b[2+AN.poly_num_vars], b[b[1]], modq, nmodq, ltbinv,
01407 &nltbinv, NULL, NULL);
01408     }
01409
01410     WORD ns=0;
01411     WORD nt;
01412     UWORD *s = NumberMalloc("poly::div_univar");
01413     UWORD *t = NumberMalloc("poly::div_univar");
01414     s[0]=0;
01415
01416     int bpow = b[2+var];
01417
01418     int ai=1, qi=1, ri=1;
01419
01420     for (int pow=a[2+var]; pow>=0; pow--) {
01421         q.check_memory(qi);
01422         r.check_memory(ri);
01423
01424         // look for the correct power in a
01425         while (ai<a[0] && a[ai+1+var] > pow)
01426             ai+=a[ai];
01427
01428         // first term of the r.h.s. of the above equation
01429         if (ai<a[0] && a[ai+1+var] == pow) {
01430             ns = a[ai+a[ai]-1];
01431             WCOPY(s, &a[ai+1+AN.poly_num_vars], ABS(ns));
01432         }
01433         else {
01434             ns = 0;
01435         }
01436
01437         int bi=1, qj=qi;
01438
01439         // second term(s) of the r.h.s. of the above equation
01440         while (qj>1 && bi<b[0]) {
01441
01442             qj -= 2 + AN.poly_num_vars + ABS(q[qj-1]);

```

```

01443
01444 while (bi<b[0] && b[bi+1+var]+q[qj+1+var] > pow)
01445     bi += b[bi];
01446
01447 if (bi<b[0] && b[bi+1+var]+q[qj+1+var] == pow) {
01448     // if both polynomials are modulo p^1, use integer calculus
01449
01450     if (both_mod_small) {
01451         s[0] = ((WORD)s[0]*ns - (LONG)b[bi+1+AN.poly_num_vars] * b[bi+b[bi]-1] *
01452             q[qj+1+AN.poly_num_vars] * q[qj+q[qj]-1]) % q.modp;
01453         ns = (s[0]==0 ? 0 : 1);
01454     }
01455     else {
01456         // otherwise, use form long calculus
01457         MulLong((UWORD *)&b[bi+1+AN.poly_num_vars], b[bi+b[bi]-1],
01458             (UWORD *)&q[qj+1+AN.poly_num_vars], q[qj+q[qj]-1],
01459             t, &nt);
01460         nt *= -1;
01461         AddLong(t,nt,s,ns,s,&ns);
01462         if (q.modp!=0) TakeNormalModulus((UWORD *)s,&ns,modq, nmodq, NOUNPACK);
01463     }
01464 }
01465 }
01466
01467 if (ns != 0) {
01468     // if necessary, adjust to range [-p/2,p/2]
01469     if (both_mod_small) {
01470         s[0]*=ns;
01471         if ((WORD)s[0] > +q.modp/2) s[0] -= q.modp;
01472         if ((WORD)s[0] < -q.modp/2) s[0] += q.modp;
01473         ns = SGN((WORD)s[0]);
01474         s[0] = ABS((WORD)s[0]);
01475     }
01476
01477     if (pow >= bpow) {
01478         // large power, so divide by b
01479         if (q.modp == 0) {
01480             DivLong(s, ns,
01481                 (UWORD *)&b[2+AN.poly_num_vars], b[b[1]],
01482                 (UWORD *)&q[qi+1+AN.poly_num_vars], &ns, t, &nt);
01483         }
01484         else {
01485             if (both_mod_small) {
01486                 q[qi+1+AN.poly_num_vars] = ((LONG)s[0]*ns*ltbinv[0]*nltbinv) % q.modp;
01487                 if ((WORD)q[qi+1+AN.poly_num_vars] > +q.modp/2) q[qi+1+AN.poly_num_vars] -=
q.modp;
01488                 if ((WORD)q[qi+1+AN.poly_num_vars] < -q.modp/2) q[qi+1+AN.poly_num_vars] +=
q.modp;
01489                 ns = (q[qi+1+AN.poly_num_vars]==0 ? 0 : SGN((WORD)q[qi+1+AN.poly_num_vars]));
01490                 q[qi+1+AN.poly_num_vars] = ABS((WORD)q[qi+1+AN.poly_num_vars]);
01491             }
01492             else {
01493                 MulLong(s, ns, ltbinv, nltbinv, (UWORD *)&q[qi+1+AN.poly_num_vars], &ns);
01494                 TakeNormalModulus((UWORD *)&q[qi+1+AN.poly_num_vars], &ns,
01495                     modq,nmodq, NOUNPACK);
01496             }
01497             nt=0;
01498         }
01499     }
01500     else {
01501         // small power, so remainder
01502         WCOPY(t,s,ABS(ns));
01503         nt = ns;
01504         ns = 0;
01505     }
01506
01507     // add terms to quotient/remainder
01508     if (ns!=0) {
01509         for (int i=0; i<AN.poly_num_vars; i++)
01510             q[qi+1+i] = 0;
01511         q[qi+1+var] = pow-bpow;
01512
01513         q[qi] = 2+AN.poly_num_vars+ABS(ns);
01514         qi += q[qi];
01515         q[qi-1] = ns;
01516     }
01517
01518     if (nt != 0) {
01519         if (only_divides) { r=poly(BHEAD 1); ri=r[0]; break; }
01520         for (int i=0; i<AN.poly_num_vars; i++)
01521             r[ri+1+i] = 0;
01522         r[ri+1+var] = pow;
01523
01524         for (int i=0; i<ABS(nt); i++)
01525             r[ri+1+AN.poly_num_vars+i] = t[i];
01526

```

```

01527             r[ri] = 2+AN.poly_num_vars+ABS(nt);
01528             ri += r[ri];
01529             r[ri-1] = nt;
01530         }
01531     }
01532 }
01533
01534 q[0] = qi;
01535 r[0] = ri;
01536
01537 NumberFree(s,"poly::div_univar");
01538 NumberFree(t,"poly::div_univar");
01539
01540 if (q.modp!=0 || ltbinv!=NULL) NumberFree(ltbinv,"poly::div_univar");
01541 }
01542
01543 /*
01544 #] divmod_univar :
01545 #[ divmod_heap :
01546 */
01547
01579 void poly::divmod_heap (const poly &a, const poly &b, poly &q, poly &r, bool only_divides, bool
check_div, bool &div_fail) {
01580
01581     POLY_GETIDENTITY(a);
01582
01583     div_fail = false;
01584     q[0] = r[0] = 1;
01585
01586     WORD nmodq=0;
01587     UWORD *modq=NULL;
01588
01589     WORD nltbinv=0;
01590     UWORD *ltbinv=NULL;
01591     LONG oldpWorkPointer = AT.pWorkPointer;
01592
01593     bool both_mod_small=false;
01594
01595     if (q.modp!=0) {
01596         if (q.modn == 1) {
01597             modq = (UWORD *) &q.modp;
01598             nmodq = 1;
01599             if (a.modp>0 && b.modp>0 && a.modn==1 && b.modn==1)
01600                 both_mod_small=true;
01601         }
01602         else {
01603             RaisPowCached(BHEAD q.modp,q.modn,&modq,&nmodq);
01604         }
01605         ltbinv = NumberMalloc("poly::div_heap-a");
01606
01607         if (both_mod_small) {
01608             WORD ltb = b[b[1]]*b[2+AN.poly_num_vars];
01609             GetModInverses(ltb + (ltb<0?q.modp:0), q.modp, (WORD*)ltbinv, NULL);
01610             nltbinv = 1;
01611         }
01612         else
01613             GetLongModInverses(BHEAD (UWORD *) &b[2+AN.poly_num_vars], b[b[1]], modq, nmodq, ltbinv,
&nltbinv, NULL, NULL);
01614     }
01615
01616     // allocate heap
01617     int nb=b.number_of_terms();
01618     WantAddPointers(nb);
01619     WORD **heap = AT.pWorkSpace + AT.pWorkPointer;
01620     AT.pWorkPointer += nb;
01621
01622     for (int i=0; i<nb; i++)
01623         heap[i] = (WORD *) NumberMalloc("poly::div_heap-b");
01624     int nheap = 1;
01625     heap[0][0] = 1;
01626     heap[0][1] = 0;
01627     heap[0][2] = -1;
01628     WCOPY(&heap[0][3], &a[1], a[1]);
01629     heap[0][3] = a[a[1]];
01630
01631     int qi=1, ri=1;
01632
01633     int s = nb;
01634     WORD *t = (WORD *) NumberMalloc("poly::div_heap-c");
01635
01636     // insert contains element that still have to be inserted to the heap
01637     // (exists to avoid code duplication).
01638     vector<pair<int,int> > insert;
01639
01640     while (insert.size()>0 || nheap>0) {
01641
01642         q.check_memory(qi);

```

```

01643     r.check_memory(ri);
01644
01645     // collect a term t for the quotient/remainder
01646     t[0] = -1;
01647
01648     do {
01649
01650         WORD *p = heap[nheap];
01651         bool this_insert;
01652
01653         if (insert.empty()) {
01654             // extract element from the heap and prepare adding new ones
01655             this_insert = false;
01656
01657             pop_heap(BHEAD heap, nheap--);
01658             p = heap[nheap];
01659
01660             if (t[0] == -1) {
01661                 WCOPY(t, p, (5+ABS(p[3])+AN.poly_num_vars));
01662             }
01663             else {
01664                 // if both polynomials are modulo p^1, use integer calculus
01665                 if (both_mod_small) {
01666                     t[4+AN.poly_num_vars] = ((LONG)t[4+AN.poly_num_vars]*t[3] +
01667 p[4+AN.poly_num_vars]*p[3]) % q.modp;
01668                     if (t[4+AN.poly_num_vars]==0)
01669                         t[3]=0;
01670                     else {
01671                         if (t[4+AN.poly_num_vars] > +q.modp/2) t[4+AN.poly_num_vars] -= q.modp;
01672                         if (t[4+AN.poly_num_vars] < -q.modp/2) t[4+AN.poly_num_vars] += q.modp;
01673                         t[3] = SGN(t[4+AN.poly_num_vars]);
01674                         t[4+AN.poly_num_vars] = ABS(t[4+AN.poly_num_vars]);
01675                     }
01676                 }
01677                 else {
01678                     // otherwise, use form long calculus
01679                     AddLong ((UWORD *)&p[4+AN.poly_num_vars], p[3],
01680                             (UWORD *)&t[4+AN.poly_num_vars], t[3],
01681                             (UWORD *)&t[4+AN.poly_num_vars], &t[3]);
01682                     if (q.modp!=0) TakeNormalModulus((UWORD *)&t[4+AN.poly_num_vars], &t[3],
01683                                                     modq, nmodq,
01684 NOUNPACK);
01685                 }
01686             }
01687             }
01688         }
01689         else {
01690             // prepare adding an element of insert to the heap
01691             this_insert = true;
01692
01693             p[0] = insert.back().first;
01694             p[1] = insert.back().second;
01695             insert.pop_back();
01696
01697             // add elements to the heap
01698             while (true) {
01699                 // prepare the element
01700                 if (p[1]==0) {
01701                     p[0] += a[p[0]];
01702                     if (p[0]==a[0]) break;
01703                     WCOPY(&p[3], &a[p[0]], a[p[0]]);
01704                     p[3] = p[2+p[3]];
01705                 }
01706                 else {
01707                     if (!this_insert)
01708                         p[1] += q[p[1]];
01709                     this_insert = false;
01710
01711                     if (p[1]==qi) { s++; break; }
01712
01713                     for (int i=0; i<AN.poly_num_vars; i++)
01714                         p[4+i] = b[p[0]+1+i] + q[p[1]+1+i];
01715
01716                     // if both polynomials are modulo p^1, use integer calculus
01717                     if (both_mod_small) {
01718                         p[4+AN.poly_num_vars] = ((LONG)b[p[0]+1+AN.poly_num_vars]*b[p[0]+b[p[0]]-1]*
01719 q[p[1]+1+AN.poly_num_vars]*q[p[1]+q[p[1]]-1]) % q.modp;
01720                         if (p[4+AN.poly_num_vars]==0)
01721                             p[3]=0;
01722                         else {
01723                             if (p[4+AN.poly_num_vars] > +q.modp/2) p[4+AN.poly_num_vars] -= q.modp;
01724                             if (p[4+AN.poly_num_vars] < -q.modp/2) p[4+AN.poly_num_vars] += q.modp;
01725                             p[3] = SGN(p[4+AN.poly_num_vars]);
01726                             p[4+AN.poly_num_vars] = ABS(p[4+AN.poly_num_vars]);
01727                         }
01728                     }
01729                 }
01730             }
01731         }
01732     }

```



```

01727         else {
01728             // otherwise, use form long calculus
01729             MulLong((UWORD *) &b[p[0]+1+AN.poly_num_vars], b[p[0]+b[p[0]]-1],
01730                     (UWORD *) &q[p[1]+1+AN.poly_num_vars], q[p[1]+q[p[1]]-1],
01731                     (UWORD *) &p[4+AN.poly_num_vars], &p[3]);
01732             if (q.modp!=0) TakeNormalModulus((UWORD *) &p[4+AN.poly_num_vars], &p[3],
01733                                             modq, nmodq,
NOUNPACK);
01734         }
01735
01736         p[3] *= -1;
01737     }
01738
01739     // no hashing
01740     p[2] = -1;
01741
01742     // add it to a heap element
01743     swap (heap[nheap],p);
01744     push_heap(BHEAD heap, ++nheap);
01745     break;
01746 }
01747 }
01748 while (t[0]==-1 || (nheap>0 && monomial_compare(BHEAD heap[0]+3, t+3)==0));
01749
01750 if (t[3] == 0) continue;
01751
01752 // check divisibility
01753 bool div = true;
01754 for (int i=0; i<AN.poly_num_vars; i++)
01755     if (t[4+i] < b[2+i]) div=false;
01756
01757 if (!div) {
01758     // not divisible, so append it to the remainder
01759     if (only_divides) { r=poly(BHEAD 1); ri=r[0]; break;}
01760     t[4 + AN.poly_num_vars + ABS(t[3])] = t[3];
01761     t[3] = 2 + AN.poly_num_vars + ABS(t[3]);
01762     r.termscopy(&t[3], ri, t[3]);
01763     ri += t[3];
01764 }
01765 else {
01766     // divisible, so divide coefficient as well
01767     WORD nq, nr;
01768
01769     if (q.modp==0) {
01770         DivLong((UWORD *) &t[4+AN.poly_num_vars], t[3],
01771                 (UWORD *) &b[2+AN.poly_num_vars], b[b[1]],
01772                 (UWORD *) &q[qi+1+AN.poly_num_vars], &nq,
01773                 (UWORD *) &r[ri+1+AN.poly_num_vars], &nr);
01774         if(check_div && nr != 0)
01775         {
01776             // non-zero remainder from coefficient division => result not expressible in
integers
01777             div_fail = true;
01778             break;
01779         }
01780     }
01781     else {
01782         // if both polynomials are modulo p^1, use integer calculus
01783         if (both_mod_small) {
01784             q[qi+1+AN.poly_num_vars] = ((LONG)t[4+AN.poly_num_vars]*t[3]*ltbinv[0]*nltbinv) %
q.modp;
01785             if (q[qi+1+AN.poly_num_vars]==0)
01786                 nq=0;
01787             else {
01788                 if (q[qi+1+AN.poly_num_vars] > +q.modp/2) q[qi+1+AN.poly_num_vars] -= q.modp;
01789                 if (q[qi+1+AN.poly_num_vars] < -q.modp/2) q[qi+1+AN.poly_num_vars] += q.modp;
01790                 nq = SGN(q[qi+1+AN.poly_num_vars]);
01791                 q[qi+1+AN.poly_num_vars] = ABS(q[qi+1+AN.poly_num_vars]);
01792             }
01793         }
01794         else {
01795             // otherwise, use form long calculus
01796             MulLong((UWORD *) &t[4+AN.poly_num_vars], t[3], ltbinv, nltbinv, (UWORD
*) &q[qi+1+AN.poly_num_vars], &nq);
01797             TakeNormalModulus((UWORD *) &q[qi+1+AN.poly_num_vars], &nq, modq, nmodq, NOUNPACK);
01798         }
01799
01800         nr=0;
01801     }
01802
01803     // add terms to quotient and remainder
01804     if (nq != 0) {
01805         int bi = 1;
01806         for (int j=1; j<s; j++) {
01807             bi += b[bi];
01808             insert.push_back(make_pair(bi,qi));
01809         }

```

```

01810             s=1;
01811
01812             q[qi] = 2+AN.poly_num_vars+ABS(nq);
01813             for (int i=0; i<AN.poly_num_vars; i++)
01814                 q[qi+1+i] = t[4+i] - b[2+i];
01815             qi += q[qi];
01816             q[qi-1] = nq;
01817         }
01818
01819         if (nr != 0) {
01820             r[ri] = 2+AN.poly_num_vars+ABS(nr);
01821             for (int i=0; i<AN.poly_num_vars; i++)
01822                 r[ri+1+i] = t[4+i];
01823             ri += r[ri];
01824             r[ri-1] = nr;
01825         }
01826     }
01827 }
01828
01829 q[0] = qi;
01830 r[0] = ri;
01831
01832 for (int i=0; i<nb; i++)
01833     NumberFree(heap[i], "poly::div_heap-b");
01834
01835 NumberFree(t, "poly::div_heap-c");
01836
01837 if (q.modp!=0 || ltbinv!=NULL) NumberFree(ltbinv, "poly::div_heap-a");
01838 AT.pWorkPointer = oldpWorkPointer;
01839 }
01840
01841 /*
01842 #] divmod_heap :
01843 #[ divmod :
01844 */
01845
01856 void poly::divmod (const poly &a, const poly &b, poly &q, poly &r, bool only_divides) {
01857     q.modp = r.modp = a.modp;
01858     q.modn = r.modn = a.modn;
01859
01860     if (a.is_zero()) {
01861         q[0]=1;
01862         r[0]=1;
01863         return;
01864     }
01865
01866     if (b.is_zero()) {
01867         MLOCK(ErrorMessageLock);
01868         MesPrint ((char*)"ERROR: division by zero polynomial");
01869         MUNLOCK(ErrorMessageLock);
01870         Terminate(1);
01871     }
01872
01873     if (b.is_one()) {
01874         q.check_memory(a[0]);
01875         q.termscopy(a.terms,0,a[0]);
01876         r[0]=1;
01877         return;
01878     }
01879
01880     if (b.is_monomial()) {
01881         divmod_one_term(a,b,q,r,only_divides);
01882         return;
01883     }
01884
01885     int vara = a.is_dense_univariate();
01886     int varb = b.is_dense_univariate();
01887
01888     if (vara!=-2 && varb!=-2 && (vara==-1 || varb==-1 || vara==varb)) {
01889         divmod_univar(a,b,q,r,Max(vara,varb),only_divides);
01890     }
01891     else {
01892         bool div_fail;
01893         divmod_heap(a,b,q,r,only_divides,false,div_fail);
01894     }
01895 }
01896
01897 /*
01898 #] divmod :
01899 #[ divides :
01900 */
01901 // returns whether a exactly divides b
01902 bool poly::divides (const poly &a, const poly &b) {
01903     POLY_GETIDENTITY(a);
01904     poly q(BHEAD 0), r(BHEAD 0);
01905     divmod(b,a,q,r,true);
01906     return r.is_zero();

```

```

01907 }
01908
01909 /*
01910     #] divides :
01911     #[ div :
01912 */
01913
01914 // the quotient of two polynomials
01915 void poly::div (const poly &a, const poly &b, poly &c) {
01916     POLY_GETIDENTITY(a);
01917     poly d(BHEAD 0);
01918     divmod(a,b,c,d,false);
01919 }
01920
01921 /*
01922     #] div :
01923     #[ mod :
01924 */
01925
01926 // the remainder of division of two polynomials
01927 void poly::mod (const poly &a, const poly &b, poly &c) {
01928     POLY_GETIDENTITY(a);
01929     poly d(BHEAD 0);
01930     divmod(a,b,c,d,false);
01931 }
01932
01933 /*
01934     #] mod :
01935     #[ copy operator :
01936 */
01937
01938 // copy operator
01939 poly & poly::operator= (const poly &a) {
01940     #ifdef POLY_MOVE_DEBUG
01941         std::cout << "poly copy assign" << std::endl;
01942     #endif
01943     if (&a != this) {
01944         modp = a.modp;
01945         modn = a.modn;
01946         check_memory(a[0]);
01947         termscopy(a.terms,0,a[0]);
01948     }
01949     return *this;
01950 }
01951
01952
01953 /*
01954     #] copy operator :
01955     #[ operator overloads :
01956 */
01957
01958 // binary operators for polynomial arithmetic
01959 const poly poly::operator+ (const poly &a) const { POLY_GETIDENTITY(a); poly b(BHEAD 0);
    add(*this,a,b); return b; }
01960 const poly poly::operator- (const poly &a) const { POLY_GETIDENTITY(a); poly b(BHEAD 0);
    sub(*this,a,b); return b; }
01961 const poly poly::operator* (const poly &a) const { POLY_GETIDENTITY(a); poly b(BHEAD 0);
    mul(*this,a,b); return b; }
01962 const poly poly::operator/ (const poly &a) const { POLY_GETIDENTITY(a); poly b(BHEAD 0);
    div(*this,a,b); return b; }
01963 const poly poly::operator% (const poly &a) const { POLY_GETIDENTITY(a); poly b(BHEAD 0);
    mod(*this,a,b); return b; }
01964
01965 // assignment operators for polynomial arithmetic
01966 poly& poly::operator+= (const poly &a) { return *this = *this + a; }
01967 poly& poly::operator-= (const poly &a) { return *this = *this - a; }
01968 poly& poly::operator*= (const poly &a) { return *this = *this * a; }
01969 poly& poly::operator/= (const poly &a) { return *this = *this / a; }
01970 poly& poly::operator%= (const poly &a) { return *this = *this % a; }
01971
01972 // comparison operators
01973 bool poly::operator== (const poly &a) const {
01974     for (int i=0; i<terms[0]; i++)
01975         if (terms[i] != a[i]) return 0;
01976     return 1;
01977 }
01978
01979 bool poly::operator!= (const poly &a) const { return !(*this == a); }
01980
01981 /*
01982     #] operator overloads :
01983     #[ num_terms :
01984 */
01985
01986 int poly::number_of_terms () const {
01987
01988     int res=0;

```

```

01989     for (int i=1; i<terms[0]; i+=terms[i])
01990         res++;
01991     return res;
01992 }
01993
01994 /*
01995     #] num_terms :
01996     #[ first_variable :
01997 */
01998
01999 // returns the lexicographically first variable of a polynomial
02000 int poly::first_variable () const {
02001
02002     POLY_GETIDENTITY(*this);
02003
02004     int var = AN.poly_num_vars;
02005     for (int j=0; j<var; j++)
02006         if (terms[2+j]>0) return j;
02007     return var;
02008 }
02009
02010 /*
02011     #] first_variable :
02012     #[ all_variables :
02013 */
02014
02015 // returns a list of all variables of a polynomial
02016 const vector<int> poly::all_variables () const {
02017
02018     POLY_GETIDENTITY(*this);
02019
02020     vector<bool> used(AN.poly_num_vars, false);
02021
02022     for (int i=1; i<terms[0]; i+=terms[i])
02023         for (int j=0; j<AN.poly_num_vars; j++)
02024             if (terms[i+1+j]>0) used[j] = true;
02025
02026     vector<int> vars;
02027     for (int i=0; i<AN.poly_num_vars; i++)
02028         if (used[i]) vars.push_back(i);
02029
02030     return vars;
02031 }
02032
02033 /*
02034     #] all_variables :
02035     #[ sign :
02036 */
02037
02038 // returns the sign of the leading coefficient
02039 int poly::sign () const {
02040     if (terms[0]==1) return 0;
02041     return terms[terms[1]] > 0 ? 1 : -1;
02042 }
02043
02044 /*
02045     #] sign :
02046     #[ degree :
02047 */
02048
02049 // returns the degree of x of a polynomial (deg=-1 iff a=0)
02050 int poly::degree (int x) const {
02051     int deg = -1;
02052     for (int i=1; i<terms[0]; i+=terms[i])
02053         deg = MaX(deg, terms[i+1+x]);
02054     return deg;
02055 }
02056
02057 /*
02058     #] degree :
02059     #[ total_degree :
02060 */
02061
02062 // returns the total degree of a polynomial (deg=-1 iff a=0)
02063 int poly::total_degree () const {
02064
02065     POLY_GETIDENTITY(*this);
02066
02067     int tot_deg = -1;
02068     for (int i=1; i<terms[0]; i+=terms[i]) {
02069         int deg=0;
02070         for (int j=0; j<AN.poly_num_vars; j++)
02071             deg += terms[i+1+j];
02072         tot_deg = MaX(deg, tot_deg);
02073     }
02074     return tot_deg;
02075 }

```

```

02076
02077 /*
02078     #] total_degree :
02079     #[ integer_lcoeff :
02080 */
02081
02082 // returns the integer coefficient of the leading monomial
02083 const poly poly::integer_lcoeff () const {
02084
02085     POLY_GETIDENTITY(*this);
02086
02087     poly res(BHEAD 0);
02088     res.modp = modp;
02089     res.modn = modn;
02090
02091     res.termscopy(&terms[1],1,terms[1]);
02092     res[0] = res[1] + 1; // length
02093     for (int i=0; i<AN.poly_num_vars; i++)
02094         res[2+i] = 0; // powers
02095
02096     return res;
02097 }
02098
02099 /*
02100     #] integer_lcoeff :
02101     #[ coefficient :
02102 */
02103
02104 // returns the polynomial coefficient of x^n
02105 const poly poly::coefficient (int x, int n) const {
02106
02107     POLY_GETIDENTITY(*this);
02108
02109     poly res(BHEAD 0);
02110     res.modp = modp;
02111     res.modn = modn;
02112     res[0] = 1;
02113
02114     for (int i=1; i<terms[0]; i+=terms[i])
02115         if (terms[i+1+x] == n) {
02116             res.check_memory(res[0]+terms[i]);
02117             res.termscopy(&terms[i], res[0], terms[i]);
02118             res[res[0]+1+x] -= n; // power of x
02119             res[0] += res[res[0]]; // length
02120         }
02121
02122     return res;
02123 }
02124
02125 /*
02126     #] coefficient :
02127     #[ lcoeff_multivar :
02128 */
02129
02130 // returns the leading coefficient with the polynomial viewed as a
02131 // polynomial in x, so that the result is a polynomial in the
02132 // remaining variables
02133 const poly poly::lcoeff_univar (int x) const {
02134     return coefficient(x, degree(x));
02135 }
02136
02137 // returns the leading coefficient with the polynomial viewed as a
02138 // polynomial with coefficients in ZZ[x], so that the result
02139 // polynomial is in ZZ[x] too
02140 const poly poly::lcoeff_multivar (int x) const {
02141
02142     POLY_GETIDENTITY(*this);
02143
02144     poly res(BHEAD 0,modp,modn);
02145
02146     for (int i=1; i<terms[0]; i+=terms[i]) {
02147         bool same_powers = true;
02148         for (int j=0; j<AN.poly_num_vars; j++)
02149             if (j!=x && terms[i+1+j]!=terms[2+j]) {
02150                 same_powers = false;
02151                 break;
02152             }
02153         if (!same_powers) break;
02154
02155         res.check_memory(res[0]+terms[i]);
02156         res.termscopy(&terms[i],res[0],terms[i]);
02157         for (int k=0; k<AN.poly_num_vars; k++)
02158             if (k!=x) res[res[0]+1+k]=0;
02159
02160         res[0] += terms[i];
02161     }
02162

```

```

02163     return res;
02164 }
02165
02166 /*
02167  #] lcoeff_multivar :
02168  #[ derivative :
02169 */
02170
02171 // returns the derivative with respect to x
02172 const poly poly::derivative (int x) const {
02173
02174     POLY_GETIDENTITY(*this);
02175
02176     poly b(BHEAD 0);
02177     int bi=1;
02178
02179     for (int i=1; i<terms[0]; i+=terms[i]) {
02180
02181         int power = terms[i+1+x];
02182
02183         if (power > 0) {
02184             b.check_memory(bi);
02185             b.termscopy(&terms[i], bi, terms[i]);
02186             b[bi+1+x]--;
02187
02188             WORD nb = b[bi+b[bi]-1];
02189             Product((UWORD *)&b[bi+1+AN.poly_num_vars], &nb, power);
02190
02191             b[bi] = 2 + AN.poly_num_vars + ABS(nb);
02192             b[bi+b[bi]-1] = nb;
02193
02194             bi += b[bi];
02195         }
02196     }
02197
02198     b[0] = bi;
02199     b.setmod(modp, modn);
02200     return b;
02201 }
02202
02203 /*
02204  #] derivative :
02205  #[ is_zero :
02206 */
02207
02208 // returns whether the polynomial is zero
02209 bool poly::is_zero () const {
02210     return terms[0] == 1;
02211 }
02212
02213 /*
02214  #] is_zero :
02215  #[ is_one :
02216 */
02217
02218 // returns whether the polynomial is one
02219 bool poly::is_one () const {
02220
02221     POLY_GETIDENTITY(*this);
02222
02223     if (terms[0] != 4+AN.poly_num_vars) return false;
02224     if (terms[1] != 3+AN.poly_num_vars) return false;
02225     for (int i=0; i<AN.poly_num_vars; i++)
02226         if (terms[2+i] != 0) return false;
02227     if (terms[2+AN.poly_num_vars] != 1) return false;
02228     if (terms[3+AN.poly_num_vars] != 1) return false;
02229
02230     return true;
02231 }
02232
02233 /*
02234  #] is_one :
02235  #[ is_integer :
02236 */
02237
02238 // returns whether the polynomial is an integer
02239 bool poly::is_integer () const {
02240
02241     POLY_GETIDENTITY(*this);
02242
02243     if (terms[0] == 1) return true;
02244     if (terms[0] != terms[1]+1) return false;
02245
02246     for (int j=0; j<AN.poly_num_vars; j++)
02247         if (terms[2+j] != 0)
02248             return false;
02249

```

```

02250     return true;
02251 }
02252
02253 /*
02254  #] is_integer :
02255  #[ is_monomial :
02256 */
02257
02258 // returns whether the polynomial consist of one term
02259 bool poly::is_monomial () const {
02260     return terms[0]>1 && terms[0]==terms[1]+1;
02261 }
02262
02263 /*
02264  #] is_monomial :
02265  #[ is_dense_univariate :
02266 */
02267
02284 int poly::is_dense_univariate () const {
02285     POLY_GETIDENTITY(*this);
02286
02287     int num_terms=0, res=-1;
02288
02289     // test univariate
02290     for (int i=1; i<terms[0]; i+=terms[i]) {
02291         for (int j=0; j<AN.poly_num_vars; j++)
02292             if (terms[i+1+j] > 0) {
02293                 if (res == -1) res = j;
02294                 if (res != j) return -2;
02295             }
02296         num_terms++;
02297     }
02298
02301     // constant polynomial
02302     if (res == -1) return -1;
02303
02304     // test density
02305     int deg = terms[2+res];
02306     if (2*num_terms < deg+1) return -2;
02307
02308     return res;
02309 }
02310
02311 /*
02312  #] is_dense_univariate :
02313  #[ simple_poly (small) :
02314 */
02315
02316 // returns the polynomial (x-a)^b mod p^n with a small
02317 const poly poly::simple_poly (PHEAD int x, int a, int b, int p, int n) {
02318     poly tmp(BHEAD 0,p,n);
02319
02320     int idx=1;
02321     tmp[idx++] = 3 + AN.poly_num_vars; // length
02322     for (int i=0; i<AN.poly_num_vars; i++)
02323         tmp[idx++] = i==x ? 1 : 0; // powers
02324     tmp[idx++] = 1; // coefficient
02325     tmp[idx++] = 1; // length coefficient
02326
02327     if (a != 0) {
02328         tmp[idx++] = 3 + AN.poly_num_vars; // length
02329         for (int i=0; i<AN.poly_num_vars; i++) tmp[idx++] = 0; // powers
02330         tmp[idx++] = ABS(a); // coefficient
02331         tmp[idx++] = -SGN(a); // length coefficient
02332     }
02333
02334     tmp[0] = idx; // length
02335
02336     if (b == 1) return tmp;
02337
02338     poly res(BHEAD 1,p,n);
02339
02340     while (b!=0) {
02341         if (b&1) res*=tmp;
02342         tmp*=tmp;
02343         b>>=1;
02344     }
02345
02346     return res;
02347 }
02348
02349 /*
02350  #] simple_poly (small) :
02351  #[ simple_poly (large) :

```

```

02353 */
02354
02355 // returns the polynomial (x-a)^b mod p^n with a large
02356 const poly poly::simple_poly (PHEAD int x, const poly &a, int b, int p, int n) {
02357
02358     poly res(BHEAD 1,p,n);
02359     poly tmp(BHEAD 0,p,n);
02360
02361     int idx=1;
02362
02363     tmp[idx++] = 3 + AN.poly_num_vars; // length
02364     for (int i=0; i<AN.poly_num_vars; i++)
02365         tmp[idx++] = i==x ? 1 : 0; // powers
02366     tmp[idx++] = 1; // coefficient
02367     tmp[idx++] = 1; // length coefficient
02368
02369     if (!a.is_zero()) {
02370         tmp[idx++] = 2 + AN.poly_num_vars + ABS(a[a[0]-1]); // length
02371         for (int i=0; i<AN.poly_num_vars; i++) tmp[idx++] = 0; // powers
02372         for (int i=0; i<ABS(a[a[0]-1]); i++)
02373             tmp[idx++] = a[2 + AN.poly_num_vars + i]; // coefficient
02374         tmp[idx++] = -a[a[0]-1]; // length coefficient
02375     }
02376
02377     tmp[0] = idx; // length
02378
02379     while (b!=0) {
02380         if (b&1) res*=tmp;
02381         tmp*=tmp;
02382         b>>=1;
02383     }
02384
02385     return res;
02386 }
02387
02388 /*
02389 #] simple_poly (large) :
02390 #[ get_variables :
02391 */
02392
02393 // gets all variables in the expressions and stores them in AN.poly_vars
02394 // (it is assumed that AN.poly_vars=NULL)
02395 void poly::get_variables (PHEAD const vector<WORD *> &es, bool with_arghead, bool sort_vars) {
02396     assert(AN.poly_vars == NULL);
02397
02398     AN.poly_num_vars = 0;
02399
02400     vector<int> vars;
02401     vector<int> degrees;
02402     map<int,int> var_to_idx;
02403
02404     // extract all variables
02405     for (int ei=0; ei<(int)es.size(); ei++) {
02406         const WORD *e = es[ei];
02407
02408         // fast notation
02409         if (*e == -SNUMBER) {
02410         }
02411         else if (*e == -SYMBOL) {
02412             if (!var_to_idx.count(e[1])) {
02413                 vars.push_back(e[1]);
02414                 var_to_idx[e[1]] = AN.poly_num_vars++;
02415                 degrees.push_back(1);
02416             }
02417         }
02418         // JD: Here we need to check for non-symbol/number terms in fast notation.
02419         else if (*e < 0) {
02420             MLOCK(ErrorMessageLock);
02421             MesPrint ((char*)"ERROR: polynomials and polyratfuns must contain symbols only");
02422             MUNLOCK(ErrorMessageLock);
02423             Terminate(1);
02424         }
02425         else {
02426             for (int i=with_arghead ? ARGHEAD : 0; with_arghead ? i<e[0] : e[i]!=0; i+=e[i]) {
02427                 if (i+1<i+e[i]-ABS(e[i+e[i]-1])) && e[i+1]!=SYMBOL) {
02428                     MLOCK(ErrorMessageLock);
02429                     MesPrint ((char*)"ERROR: polynomials and polyratfuns must contain symbols only");
02430                     MUNLOCK(ErrorMessageLock);
02431                     Terminate(1);
02432                 }
02433
02434                 for (int j=i+3; j<i+e[i]-ABS(e[i+e[i]-1]); j+=2) {
02435                     if (!var_to_idx.count(e[j])) {
02436                         vars.push_back(e[j]);
02437                         var_to_idx[e[j]] = AN.poly_num_vars++;
02438                         degrees.push_back(e[j+1]);
02439                     }

```



```

02440         else {
02441             degrees[var_to_idx[e[j]]] = MaX(degrees[var_to_idx[e[j]]], e[j+1]);
02442         }
02443     }
02444 }
02445 }
02446 }
02447
02448 // make sure an eventual FACTORSYMBOL appear as last
02449 if (var_to_idx.count(FACTORSYMBOL)) {
02450     int i = var_to_idx[FACTORSYMBOL];
02451     while (i+1<AN.poly_num_vars) {
02452         swap(vars[i], vars[i+1]);
02453         swap(degrees[i], degrees[i+1]);
02454         i++;
02455     }
02456     degrees[i] = -1; // makes sure it stays last
02457 }
02458
02459 // AN.poly_vars will be deleted in calling functions from polywrap.c
02460 // For that we use the function poly_free_poly_vars
02461 // We add one to the allocation to avoid copying in poly_divmod
02462
02463 if ( (AN.poly_num_vars+1)*sizeof(WORD) > (size_t)(AM.MaxTer) ) {
02464     // This can happen only in expressions with excessively many variables.
02465     AN.poly_vars = (WORD *)Malloc1((AN.poly_num_vars+1)*sizeof(WORD), "AN.poly_vars");
02466     AN.poly_vars_type = 1;
02467 }
02468 else {
02469     AN.poly_vars = TermMalloc("AN.poly_vars");
02470     AN.poly_vars_type = 0;
02471 }
02472
02473 for (int i=0; i<AN.poly_num_vars; i++)
02474     AN.poly_vars[i] = vars[i];
02475
02476 if (sort_vars) {
02477     // bubble sort variables in decreasing order of degree
02478     // (this seems better for factorization)
02479     for (int i=0; i<AN.poly_num_vars; i++)
02480         for (int j=0; j+1<AN.poly_num_vars; j++)
02481             if (degrees[j] < degrees[j+1]) {
02482                 swap(degrees[j], degrees[j+1]);
02483                 swap(AN.poly_vars[j], AN.poly_vars[j+1]);
02484             }
02485 }
02486 else {
02487     // sort lexicographically
02488     sort(AN.poly_vars, AN.poly_vars+AN.poly_num_vars - var_to_idx.count(FACTORSYMBOL));
02489 }
02490 }
02491
02492 /*
02493 #] get_variables :
02494 #[ argument_to_poly :
02495 */
02496
02497 // converts a form expression to a polynomial class "poly"
02498 const poly poly::argument_to_poly (PHEAD WORD *e, bool with_arghead, bool sort_univar, poly *denpoly)
02499 {
02500     map<int,int> var_to_idx;
02501     for (int i=0; i<AN.poly_num_vars; i++)
02502         var_to_idx[AN.poly_vars[i]] = i;
02503
02504     poly res(BHEAD 0);
02505
02506     // fast notation
02507     if (*e == -SNUMBER) {
02508         if (denpoly!=NULL) *denpoly = poly(BHEAD 1);
02509
02510         if (e[1] == 0) {
02511             res[0] = 1;
02512             return res;
02513         }
02514         else {
02515             res[0] = 4 + AN.poly_num_vars;
02516             res[1] = 3 + AN.poly_num_vars;
02517             for (int i=0; i<AN.poly_num_vars; i++)
02518                 res[2+i] = 0;
02519             res[2+AN.poly_num_vars] = ABS(e[1]);
02520             res[3+AN.poly_num_vars] = SGN(e[1]);
02521
02522             return res;
02523         }
02524     }
02525 }

```

```

02526     if (*e == -SYMBOL) {
02527         if (denpoly!=NULL) *denpoly = poly(BHEAD 1);
02528
02529         res[0] = 4 + AN.poly_num_vars;
02530         res[1] = 3 + AN.poly_num_vars;
02531         for (int i=0; i<AN.poly_num_vars; i++)
02532             res[2+i] = 0;
02533         res[2+var_to_idx.find(e[1])>second] = 1;
02534         res[2+AN.poly_num_vars] = 1;
02535         res[3+AN.poly_num_vars] = 1;
02536         return res;
02537     }
02538
02539     // find LCM of denominators of all terms
02540     WORD nden=1, npro=0, ngcd=0, ndum=0;
02541     UWORD *den = NumberMalloc("poly::argument_to_poly");
02542     UWORD *pro = NumberMalloc("poly::argument_to_poly");
02543     UWORD *gcd = NumberMalloc("poly::argument_to_poly");
02544     UWORD *dum = NumberMalloc("poly::argument_to_poly");
02545     den[0]=1;
02546
02547     for (int i=with_arghead ? ARGHEAD : 0; with_arghead ? i<e[0] : e[i]!=0; i+=e[i]) {
02548         int ncoe = ABS(e[i+e[i]-1]/2);
02549         UWORD *coe = (UWORD *)&e[i+e[i]-ncoe-1];
02550         while (ncoe>0 && coe[ncoe-1]==0) ncoe--;
02551         Mullong(den, nden, coe, ncoe, pro, &npro);
02552         GcdLong(BHEAD den, nden, coe, ncoe, gcd, &ngcd);
02553         DivLong(pro, npro, gcd, ngcd, den, &nden, dum, &ndum);
02554     }
02555
02556     if (denpoly!=NULL) *denpoly = poly(BHEAD den, nden);
02557
02558     int ri=1;
02559
02560     // ordinary notation
02561     for (int i=with_arghead ? ARGHEAD : 0; with_arghead ? i<e[0] : e[i]!=0; i+=e[i]) {
02562         res.check_memory(ri);
02563         WORD nc = e[i+e[i]-1]; // length coefficient
02564         for (int j=0; j<AN.poly_num_vars; j++) // powers=0
02565             res[ri+1+j]=0; // coefficient to dummy
02566         WCOPY(dum, &e[i+e[i]-ABS(nc)], ABS(nc)); // remove denominator
02567         nc /= 2; // multiply with
02568         Mully(BHEAD dum, &nc, den, nden);
02569         overall den
02570             res.termscopy((WORD *)dum, ri+1+AN.poly_num_vars, ABS(nc)); // coefficient to res
02571         res[ri] = ABS(nc) + AN.poly_num_vars + 2; // length
02572         res[ri+res[ri]-1] = nc; // length coefficient
02573         for (int j=i+3; j<i+e[i]-ABS(e[i+e[i]-1]); j+=2)
02574             res[ri+1+var_to_idx.find(e[j])>second] = e[j+1]; // powers
02575         ri += res[ri]; // length
02576     }
02577
02578     res[0] = ri;
02579
02580     // JD: For univariate cases, check whether the ordering is correct or not.
02581     // There are various ways to arrive here, but with an incorrect ordering, such
02582     // as interactions with collect, moving a polyratfun out of another function
02583     // argument, etc.
02584     // If the ordering is not correct, make sure we normalize. In multivariate cases,
02585     // always normalize as before.
02586     if (sort_univar == false && AN.poly_num_vars == 1) {
02587         if (res.number_of_terms() >= 2) {
02588             if (res[2] < res.last_monomial()[2]) {
02589                 sort_univar = true;
02590             }
02591         }
02592     }
02593
02594     if (sort_univar || AN.poly_num_vars>1) {
02595         res.normalize();
02596     }
02597
02598     NumberFree(den, "poly::argument_to_poly");
02599     NumberFree(pro, "poly::argument_to_poly");
02600     NumberFree(gcd, "poly::argument_to_poly");
02601     NumberFree(dum, "poly::argument_to_poly");
02602
02603     return res;
02604 }
02605
02606 /*
02607 #] argument_to_poly :
02608 #[ poly_to_argument :
02609 */
02610 // converts a polynomial class "poly" to a form expression
02611 void poly::poly_to_argument (const poly &a, WORD *res, bool with_arghead) {

```

```

02612
02613     POLY_GETIDENTITY(a);
02614
02615     // special case: a=0
02616     if (a[0]==1) {
02617         if (with_arghead) {
02618             res[0] = -SNUMBER;
02619             res[1] = 0;
02620         }
02621         else {
02622             res[0] = 0;
02623         }
02624         return;
02625     }
02626
02627     if (with_arghead) {
02628         res[1] = AN.poly_num_vars>1 ? DIRTYFLAG : 0; // dirty flag
02629         for (int i=2; i<ARGHEAD; i++)
02630             res[i] = 0; // remainder of arghead
02631     }
02632
02633     int L = with_arghead ? ARGHEAD : 0;
02634
02635     for (int i=1; i!=a[0]; i+=a[i]) {
02636
02637         res[L]=1; // length
02638
02639         bool first=true;
02640
02641         for (int j=0; j<AN.poly_num_vars; j++)
02642             if (a[i+1+j] > 0) {
02643                 if (first) {
02644                     first=false;
02645                     res[L+1] = 1; // symbols
02646                     res[L+2] = 2; // length
02647                 }
02648                 res[L+1+res[L+2]++] = AN.poly_vars[j]; // symbol
02649                 res[L+1+res[L+2]++] = a[i+1+j]; // power
02650             }
02651
02652         if (!first) res[L] += res[L+2]; // fix length
02653
02654         WORD nc = a[i+a[i]-1];
02655         WCOPY(&res[L+res[L]], &a[i+a[i]-1-ABS(nc)], ABS(nc)); // numerator
02656
02657         res[L] += ABS(nc); // fix length
02658         memset(&res[L+res[L]], 0, ABS(nc)*sizeof(WORD)); // denominator one
02659         res[L+res[L]] = 1; // denominator one
02660         res[L] += ABS(nc); // fix length
02661         res[L+res[L]] = SGN(nc) * (2*ABS(nc)+1); // length of coefficient
02662         res[L]++; // fix length
02663         L += res[L]; // fix length
02664     }
02665
02666     if (with_arghead) {
02667         res[0] = L;
02668         // convert to fast notation if possible
02669         ToFast(res,res);
02670     }
02671     else {
02672         res[L] = 0;
02673     }
02674 }
02675
02676 /*
02677 #] poly_to_argument :
02678 #[ poly_to_argument_with_den :
02679 */
02680
02681 // converts a polynomial class "poly" divided by a number (nden, den) to a form expression
02682 // cf. poly::poly_to_argument()
02683 void poly::poly_to_argument_with_den (const poly &a, WORD nden, const UWORD *den, WORD *res, bool
    with_arghead) {
02684
02685     POLY_GETIDENTITY(a);
02686
02687     // special case: a=0
02688     if (a[0]==1) {
02689         if (with_arghead) {
02690             res[0] = -SNUMBER;
02691             res[1] = 0;
02692         }
02693         else {
02694             res[0] = 0;
02695         }
02696         return;
02697     }

```

```

02698
02699     if (with_arghead) {
02700         res[1] = AN.poly_num_vars>1 ? DIRTYFLAG : 0; // dirty flag
02701         for (int i=2; i<ARGHEAD; i++)
02702             res[i] = 0; // remainder of arghead
02703     }
02704
02705     WORD nden1;
02706     UWORD *den1 = (UWORD *)NumberMalloc("poly_to_argument_with_den");
02707
02708     int L = with_arghead ? ARGHEAD : 0;
02709
02710     for (int i=1; i!=a[0]; i+=a[i]) {
02711
02712         res[L]=1; // length
02713
02714         bool first=true;
02715
02716         for (int j=0; j<AN.poly_num_vars; j++)
02717             if (a[i+1+j] > 0) {
02718                 if (first) {
02719                     first=false;
02720                     res[L+1] = 1; // symbols
02721                     res[L+2] = 2; // length
02722                 }
02723                 res[L+1+res[L+2]++] = AN.poly_vars[j]; // symbol
02724                 res[L+1+res[L+2]++] = a[i+1+j]; // power
02725             }
02726
02727         if (!first) res[L] += res[L+2]; // fix length
02728
02729         // numerator
02730         WORD nc = a[i+a[i]-1];
02731         WCOPY(&res[L+res[L]], &a[i+a[i]-1-ABS(nc)], ABS(nc));
02732
02733         // denominator
02734         nden1 = nden;
02735         WCOPY(den1, den, ABS(nden));
02736
02737         if (nden != 1 || den[0] != 1) {
02738             // remove gcd(num,den)
02739             Simplify(BHEAD (UWORD *)&res[L+res[L]], &nc, den1, &nden1);
02740         }
02741
02742         Pack((UWORD *)&res[L+res[L]], &nc, den1, nden1); // format
02743         res[L] += 2*ABS(nc)+1; // fix length
02744         res[L+res[L]-1] = SGN(nc)*(2*ABS(nc)+1); // length of coefficient
02745         L += res[L]; // fix length
02746     }
02747
02748     NumberFree(den1, "poly_to_argument_with_den");
02749
02750     if (with_arghead) {
02751         res[0] = L;
02752         // convert to fast notation if possible
02753         ToFast(res,res);
02754     }
02755     else {
02756         res[L] = 0;
02757     }
02758 }
02759
02760 /*
02761 #] poly_to_argument_with_den :
02762 #[ size_of_form_notation :
02763 */
02764
02765 // the size of the polynomial in form notation (without argheads and fast notation)
02766 int poly::size_of_form_notation () const {
02767
02768     POLY_GETIDENTITY(*this);
02769
02770     // special case: a=0
02771     if (terms[0]==1) return 0;
02772
02773     int len = 0;
02774
02775     for (int i=1; i!=terms[0]; i+=terms[i]) {
02776         len++;
02777         int npow = 0;
02778         for (int j=0; j<AN.poly_num_vars; j++)
02779             if (terms[i+1+j] > 0) npow++;
02780         if (npow > 0) len += 2*npow + 2;
02781         len += 2 * ABS(terms[i+terms[i]-1]) + 1;
02782     }
02783
02784     return len;

```

```

02785 }
02786
02787 /*
02788     #] size_of_form_notation :
02789     #[ size_of_form_notation_with_den :
02790 */
02791
02792 // the size of the polynomial divided by a number (its size is given by nden)
02793 // in form notation (without argheads and fast notation)
02794 // cf. poly::size_of_form_notation()
02795 int poly::size_of_form_notation_with_den (WORD nden) const {
02796
02797     POLY_GETIDENTITY(*this);
02798
02799     // special case: a=0
02800     if (terms[0]==1) return 0;
02801
02802     nden = ABS(nden);
02803     int len = 0;
02804
02805     for (int i=1; i!=terms[0]; i+=terms[i]) {
02806         len++;
02807         int npow = 0;
02808         for (int j=0; j<AN.poly_num_vars; j++)
02809             if (terms[i+1+j] > 0) npow++;
02810         if (npow > 0) len += 2*npow + 2;
02811         len += 2 * MaX(ABS(terms[i+terms[i]-1]), nden) + 1;
02812     }
02813
02814     return len;
02815 }
02816
02817 /*
02818     #] size_of_form_notation_with_den :
02819     #[ to_coefficient_list :
02820 */
02821
02822 // returns the coefficient list of a univariate polynomial
02823 const vector<WORD> poly::to_coefficient_list (const poly &a) {
02824
02825     POLY_GETIDENTITY(a);
02826
02827     if (a.is_zero()) return vector<WORD>();
02828
02829     int x = a.first_variable();
02830     if (x == AN.poly_num_vars) x=0;
02831
02832     vector<WORD> res(1+a[2+x],0);
02833
02834     for (int i=1; i<a[0]; i+=a[i])
02835         res[a[i+1+x]] = (a[i+a[i]-1] * a[i+a[i]-2]) % a.modp;
02836
02837     return res;
02838 }
02839
02840 /*
02841     #] to_coefficient_list :
02842     #[ coefficient_list_divmod :
02843 */
02844
02845 // divides two polynomials represented by coefficient lists
02846 const vector<WORD> poly::coefficient_list_divmod (const vector<WORD> &a, const vector<WORD> &b, WORD
p, int divmod) {
02847
02848     int bsize = (int)b.size();
02849     while (b[bsize-1]==0) bsize--;
02850
02851     WORD inv;
02852     GetModInverses(b[bsize-1] + (b[bsize-1]<0?p:0), p, &inv, NULL);
02853
02854     vector<WORD> q(a.size(),0);
02855     vector<WORD> r(a);
02856
02857     while ((int)r.size() >= bsize) {
02858         LONG mul = ((LONG)inv * r.back()) % p;
02859         int off = r.size()-bsize;
02860         q[off] = mul;
02861         for (int i=0; i<bsize; i++)
02862             r[off+i] = (r[off+i] - mul*b[i]) % p;
02863         while (r.size()>0 && r.back()==0)
02864             r.pop_back();
02865     }
02866
02867     if (divmod==0) {
02868         while (q.size()>0 && q.back()==0)
02869             q.pop_back();
02870         return q;

```

```

02871     }
02872     else {
02873         while (r.size()>0 && r.back()==0)
02874             r.pop_back();
02875         return r;
02876     }
02877 }
02878
02879 /*
02880  #] coefficient_list_divmod :
02881  #[ from_coefficient_list :
02882  */
02883
02884 // converts a coefficient list to a "poly"
02885 const poly poly::from_coefficient_list (PHEAD const vector<WORD> &a, int x, WORD p) {
02886     poly res(BHEAD 0);
02887     int ri=1;
02888
02889     for (int i=(int)a.size()-1; i>=0; i--)
02890         if (a[i] != 0) {
02891             res.check_memory(ri);
02892             res[ri] = AN.poly_num_vars+3; // length
02893             for (int j=0; j<AN.poly_num_vars; j++)
02894                 res[ri+1+j]=0; // powers
02895             res[ri+1+x] = i; // power of x
02896             res[ri+1+AN.poly_num_vars] = ABS(a[i]); // coefficient
02897             res[ri+1+AN.poly_num_vars+1] = SGN(a[i]); // sign
02898             ri += res[ri];
02899         }
02900
02901
02902     res[0]=ri; // total length
02903     res.setmod(p,1);
02904
02905     return res;
02906 }
02907
02908 /*
02909  #] from_coefficient_list :
02910  */

```

4.104 poly.h

```

00001 #pragma once
00002 /* #] License : */
00003 /*
00004  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00005  * When using this file you are requested to refer to the publication
00006  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00007  * This is considered a matter of courtesy as the development was paid
00008  * for by FOM the Dutch physics granting agency and we would like to
00009  * be able to track its scientific use to convince FOM of its value
00010  * for the community.
00011  *
00012  * This file is part of FORM.
00013  *
00014  * FORM is free software: you can redistribute it and/or modify it under the
00015  * terms of the GNU General Public License as published by the Free Software
00016  * Foundation, either version 3 of the License, or (at your option) any later
00017  * version.
00018  *
00019  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00020  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00021  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00022  * details.
00023  *
00024  * You should have received a copy of the GNU General Public License along
00025  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00026  */
00027 /* #] License : */
00028
00029 extern "C" {
00030 #include "form3.h"
00031 }
00032
00033 #include <iostream>
00034 #include <string>
00035 #include <vector>
00036
00037 // for debugging
00038 // #define POLY_MOVE_DEBUG
00039
00040 // macros for tform

```

```

00041 #ifndef WITHPTHREADS
00042 #define POLY_GETIDENTITY(X)
00043 #define POLY_STOREIDENTITY
00044 #else
00045 #define POLY_GETIDENTITY(X) ALLPRIVATES *B = (X).Bpointer
00046 #define POLY_STOREIDENTITY Bpointer = B
00047 #endif
00048
00049 // maximum size of the hash table used for multiplication and division
00050
00051 const int POLY_MAX_HASH_SIZE = Min(1<<20, MAXPOSITIVE);
00052
00053 class poly {
00054 public:
00055     // variables
00056     #ifdef WITHPTHREADS
00057         ALLPRIVATES *Bpointer;
00058     #endif
00059     WORD *terms;
00060     LONG size_of_terms;
00061     WORD modp, modn;
00062
00063     // constructors/destructor
00064     poly (PHEAD int, WORD=-1, WORD=1);
00065     poly (PHEAD const UWORD *, WORD, WORD=-1, WORD=1);
00066     poly (const poly &, WORD=-1, WORD=1);
00067     ~poly ();
00068
00069     // operators
00070     poly& operator+= (const poly&);
00071     poly& operator-= (const poly&);
00072     poly& operator*= (const poly&);
00073     poly& operator/= (const poly&);
00074     poly& operator%= (const poly&);
00075
00076     const poly operator+ (const poly&) const;
00077     const poly operator- (const poly&) const;
00078     const poly operator* (const poly&) const;
00079     const poly operator/ (const poly&) const;
00080     const poly operator% (const poly&) const;
00081
00082     bool operator== (const poly&) const;
00083     bool operator!= (const poly&) const;
00084     poly& operator= (const poly &);
00085     WORD& operator[] (int);
00086     const WORD& operator[] (int) const;
00087
00088     #if __cplusplus >= 201103L
00089         // support move semantics
00090         poly (poly &&, WORD=-1, WORD=1) noexcept;
00091         poly& operator= (poly &&) noexcept;
00092     #endif
00093
00094     // memory management
00095     void termscopy (const WORD *, int, int);
00096     void check_memory(int);
00097     void expand_memory(int);
00098
00099     // check type of polynomial
00100     bool is_zero () const;
00101     bool is_one () const;
00102     bool is_integer () const;
00103     bool is_monomial () const;
00104     int is_dense_univariate () const;
00105
00106     // properties
00107     int sign () const;
00108     int degree (int) const;
00109     int total_degree () const;
00110     int first_variable () const;
00111     int number_of_terms () const;
00112     const std::vector<int> all_variables () const;
00113     const poly integer_lcoeff () const;
00114     const poly lcoeff_univar (int) const;
00115     const poly lcoeff_multivar (int) const;
00116     const poly coefficient (int, int) const;
00117     const poly derivative (int) const;
00118
00119     // modulo calculus
00120     void setmod(WORD, WORD=1);
00121     void coefficients_modulo (UWORD *, WORD, bool);
00122
00123     // simple polynomials
00124     static const poly simple_poly (PHEAD int, int=0, int=1, int=0, int=1);

```

```

00128     static const poly simple_poly (PHEAD int, const poly&, int=1, int=0, int=1);
00129
00130     // conversion from/to form notation
00131     static void get_variables (PHEAD const std::vector<WORD *> &, bool, bool);
00132     static const poly argument_to_poly (PHEAD WORD *, bool, bool, poly *den=NULL);
00133     static void poly_to_argument (const poly &, WORD *, bool);
00134     static void poly_to_argument_with_den (const poly &, WORD, const UWORD *, WORD *, bool);
00135     int size_of_form_notation () const;
00136     int size_of_form_notation_with_den (WORD) const;
00137     const poly & normalize ();
00138
00139     // operations for coefficient lists
00140     static const poly from_coefficient_list (PHEAD const std::vector<WORD> &, int, WORD);
00141     static const std::vector<WORD> to_coefficient_list (const poly &);
00142     static const std::vector<WORD> coefficient_list_divmod (const std::vector<WORD> &, const
std::vector<WORD> &, WORD, int);
00143
00144     // string output for debugging
00145     const std::string to_string() const;
00146
00147     // monomials
00148     static int monomial_compare (PHEAD const WORD *, const WORD *);
00149     WORD last_monomial_index () const;
00150     WORD* last_monomial () const;
00151     int compare_degree_vector(const poly &) const;
00152     std::vector<int> degree_vector() const;
00153     int compare_degree_vector(const std::vector<int> &) const;
00154
00155     // (internal) mathematical operations
00156     static void add (const poly &, const poly &, poly &);
00157     static void sub (const poly &, const poly &, poly &);
00158     static void mul (const poly &, const poly &, poly &);
00159     static void div (const poly &, const poly &, poly &);
00160     static void mod (const poly &, const poly &, poly &);
00161     static void divmod (const poly &, const poly &, poly &, poly &, bool only_divides);
00162     static bool divides (const poly &, const poly &);
00163
00164     static void mul_one_term (const poly &, const poly &, poly &);
00165     static void mul_univar (const poly &, const poly &, poly &, int);
00166     static void mul_heap (const poly &, const poly &, poly &);
00167
00168     static void divmod_one_term (const poly &, const poly &, poly &, poly &, bool);
00169     static void divmod_univar (const poly &, const poly &, poly &, poly &, int, bool);
00170     static void divmod_heap (const poly &, const poly &, poly &, poly &, bool, bool, bool&);
00171
00172     static void push_heap (PHEAD WORD **, int);
00173     static void pop_heap (PHEAD WORD **, int);
00174 };
00175
00176 // comparison class for monomials (for std::sort)
00177 class monomial_larger {
00178 public:
00179
00180     #ifndef WITHPTHREADS
00181     monomial_larger() {}
00182     #else
00183     ALLPRIVATES *B;
00184     monomial_larger(ALLPRIVATES *b): B(b) {}
00185     #endif
00186
00187     bool operator()(const WORD *a, const WORD *b) {
00188         return poly::monomial_compare(BHEAD a, b) > 0;
00189     }
00190 };
00191
00192 // stream operator
00193 std::ostream& operator<< (std::ostream &, const poly &);
00194
00195 // inline function definitions
00196
00197 #if __cplusplus >= 201103L
00198 inline poly::poly (poly &a, WORD modp, WORD modn) noexcept {
00199     #ifdef POLY_MOVE_DEBUG
00200     std::cout << "poly move ctor" << std::endl;
00201     #endif
00202     POLY_GETIDENTITY(a);
00203     POLY_STOREIDENTITY;
00204     terms = a.terms;
00205     size_of_terms = a.size_of_terms;
00206     this->modp = a.modp;
00207     this->modn = a.modn;
00208     if (modp != -1) {
00209         setmod(modp,modn);
00210     }
00211     a.terms = nullptr;
00212 }

```



```

00214     a.size_of_terms = -1;
00215 }
00216
00217 inline poly& poly::operator= (poly &a) noexcept {
00218     #ifdef POLY_MOVE_DEBUG
00219         std::cout << "poly move assign" << std::endl;
00220     #endif
00221     if (this != &a) {
00222         WORD *old_terms = terms;
00223         LONG old_size_of_terms = size_of_terms;
00224         terms = a.terms;
00225         size_of_terms = a.size_of_terms;
00226         modp = a.modp;
00227         modn = a.modn;
00228         a.terms = old_terms;
00229         a.size_of_terms = old_size_of_terms;
00230     }
00231     return *this;
00232 }
00233
00234 #endif
00235
00236 /* Checks whether the terms array is large enough to add another
00237 * term (of size AM.MaxTal) to the polynomials. In case not, it is
00238 * expanded.
00239 */
00240 inline void poly::check_memory (int i) {
00241     POLY_GETIDENTITY(*this);
00242     if (i + 3 + AN.poly_num_vars + AM.MaxTal >= size_of_terms) expand_memory(i + AM.MaxTal);
00243     // Used to be i+2 but there should also be space for a trailing zero
00244 }
00245
00246 // indexing operators
00247 inline WORD& poly::operator[] (int i) {
00248     return terms[i];
00249 }
00250
00251 inline const WORD& poly::operator[] (int i) const {
00252     return terms[i];
00253 }
00254
00255 /* Copies "num" WORD-sized terms from the pointer "source" to the
00256 * current polynomial at index "dest"
00257 */
00258 inline void poly::termscopy (const WORD *source, int dest, int num) {
00259     #ifdef POLY_MOVE_DEBUG
00260         std::cout << "poly termscopy: num=" << num << std::endl;
00261     #endif
00262     memcpy (terms+dest, source, num*sizeof(WORD));
00263 }

```


4.105 polyfact.cc File Reference

```

#include "poly.h"
#include "polygcd.h"
#include "polyfact.h"
#include <cmath>
#include <vector>
#include <iostream>
#include <algorithm>
#include <climits>

```

Include dependency graph for `polyfact.cc`:

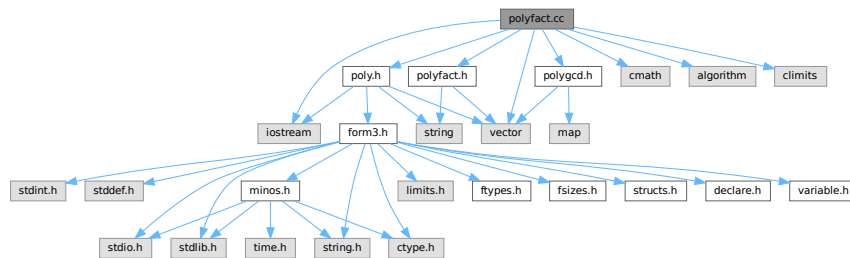

Functions

- `ostream & operator<< (ostream &out, const factorized\_poly &a)`
- `template<class T >`
`ostream & operator<< (ostream &out, const vector< T > &v)`

4.105.1 Detailed Description

Contains the routines for factorizing multivariate polynomials

Definition in file [polyfact.cc](#).

4.105.2 Function Documentation

4.105.2.1 `operator<<()` [1/2]

```
ostream & operator<< (
    ostream & out,
    const factorized\_poly & a )
```

Definition at line 104 of file [polyfact.cc](#).

4.105.2.2 `operator<<()` [2/2]

```
template<class T >
ostream & operator<< (
    ostream & out,
    const vector< T > & v )
```

Definition at line 109 of file [polyfact.cc](#).

4.106 polyfact.cc

[Go to the documentation of this file.](#)

```

00001
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 *   When using this file you are requested to refer to the publication
00009 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 *   This is considered a matter of courtesy as the development was paid
00011 *   for by FOM the Dutch physics granting agency and we would like to
00012 *   be able to track its scientific use to convince FOM of its value
00013 *   for the community.
00014 *
00015 *   This file is part of FORM.
00016 *
00017 *   FORM is free software: you can redistribute it and/or modify it under the
00018 *   terms of the GNU General Public License as published by the Free Software
00019 *   Foundation, either version 3 of the License, or (at your option) any later
00020 *   version.
00021 *
00022 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 *   details.
00026 *
00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #[ License : */
00031 /*
00032     #[ include :
00033 */
00034
00035 #include "poly.h"
00036 #include "polygcd.h"
00037 #include "polyfact.h"
00038
00039 #include <cmath>
00040 #include <vector>
00041 #include <iostream>
00042 #include <algorithm>
00043 #include <climits>
00044
00045 // #define DEBUG
00046
00047 #ifdef DEBUG
00048 #include "mytime.h"
00049 #endif
00050
00051 using namespace std;
00052
00053 /*
00054     #[ include :
00055     #[ tostring :
00056 */
00057
00058 // Turns a factorized_poly into a readable string
00059 const string factorized_poly::tostring () const {
00060
00061     // empty
00062     if (factor.size()==0)
00063         return "no_factors";
00064
00065     string res;
00066
00067     // polynomial
00068     for (int i=0; i<(int)factor.size(); i++) {
00069         if (i>0) res += "*";
00070         res += "(";
00071         res += poly(factor[i],0,1).to_string();
00072         res += ")";
00073         if (power[i]>1) {
00074             res += "^";
00075             char tmp[100];
00076             snprintf (tmp,100,"%i",power[i]);
00077             res += tmp;
00078         }
00079     }
00080
00081     // modulo p^n
00082     if (factor[0].modp>0) {
00083         res += " (mod ";
00084         char tmp[12];
00085         snprintf (tmp,12,"%i",factor[0].modp);

```

```

00086         res += tmp;
00087         if (factor[0].modn > 1) {
00088             snprintf(tmp,12,"%i",factor[0].modn);
00089             res += "^";
00090             res += tmp;
00091         }
00092         res += ")";
00093     }
00094
00095     return res;
00096 }
00097
00098 /*
00099  #] toString :
00100  #[ ostream operator :
00101  */
00102
00103 // ostream operator for outputting a factorized_poly
00104 ostream& operator<< (ostream &out, const factorized_poly &a) {
00105     return out << a.toString();
00106 }
00107
00108 // ostream operator for outputting a vector<T>
00109 template<class T> ostream& operator<< (ostream &out, const vector<T> &v) {
00110     out<<"{";
00111     for (int i=0; i<(int)v.size(); i++) {
00112         if (i>0) out<<",";
00113         out<<v[i];
00114     }
00115     out<<"}";
00116     return out;
00117 }
00118
00119 /*
00120  #] ostream operator :
00121  #[ add_factor :
00122  */
00123
00124 // adds a factor f^p to a factorization
00125 void factorized_poly::add_factor(const poly &f, int p) {
00126     factor.push_back(f);
00127     power.push_back(p);
00128 }
00129
00130 /*
00131  #] add_factor :
00132  #[ extended_gcd_Euclidean_lifted :
00133  */
00134
00152 const vector<poly> polyfact::extended_gcd_Euclidean_lifted (const poly &a, const poly &b) {
00153
00154 #ifdef DEBUGALL
00155     cout << "*** [" << thetime() << " ] CALL: extended_Euclidean_lifted(" <<a<<","<<b<<")<<endl;
00156 #endif
00157
00158     POLY_GETIDENTITY(a);
00159
00160     // Calculate s,t,gcd (mod p) with the Extended Euclidean Algorithm.
00161     poly s(a,a.modp,1);
00162     poly t(b,b.modp,1);
00163     poly sa(BHEAD 1,a.modp,1);
00164     poly sb(BHEAD 0,b.modp,1);
00165     poly ta(BHEAD 0,a.modp,1);
00166     poly tb(BHEAD 1,b.modp,1);
00167
00168     while (!t.is_zero()) {
00169         poly x(s/t);
00170         swap(s -=x*t , t);
00171         swap(sa-=x*ta, ta);
00172         swap(sb-=x*tb, tb);
00173     }
00174
00175     // Normalize the result.
00176     sa /= s.integer_lcoeff();
00177     sb /= s.integer_lcoeff();
00178
00179     // Lift the result to modulo p^n with p-adic Newton's iteration.
00180     poly samodp(sa);
00181     poly sbmodp(sb);
00182     poly term(BHEAD 1);
00183
00184     sa.setmod(0,1);
00185     sb.setmod(0,1);
00186
00187     poly amodp(a,a.modp,1);
00188     poly bmodp(b,a.modp,1);
00189     poly error(poly(BHEAD 1) - sa*a - sb*b);

```

```

00190     poly p(BHEAD a.modp);
00191
00192     for (int n=1; n<a.modn && !error.is_zero(); n++) {
00193         error /= p;
00194         term *= p;
00195         poly errormodp(error,a.modp,1);
00196         poly dsa((samodp * errormodp) % bmodp);
00197         // equivalent, but faster than the symmetric
00198         // poly dsb((sbmodp * errormodp) % amodp);
00199         poly dsb((errormodp - dsa*amodp) / bmodp);
00200         sa += term * dsa;
00201         sb += term * dsb;
00202         error -= a*dsa + b*dsb;
00203     }
00204
00205     sa.setmod(a.modp,a.modn);
00206     sb.setmod(a.modp,a.modn);
00207
00208     // Output the result
00209     vector<poly> res;
00210     res.push_back(sa);
00211     res.push_back(sb);
00212
00213 #ifdef DEBUGALL
00214     cout << "*** [" << thetime() << "]" RES : extended_Euclidean_lifted("«a«","«b«") = "«res«endl;
00215 #endif
00216
00217     return res;
00218 }
00219
00220 /*
00221 #] extended_gcd_Euclidean_lifted :
00222 #[ solve_Diophantine_univariate :
00223 */
00224
00256 const vector<poly> polyfact::solve_Diophantine_univariate (const vector<poly> &a, const poly &b) {
00257
00258 #ifdef DEBUGALL
00259     cout << "*** [" << thetime() << "]" CALL: solve_Diophantine_univariate(" «a«","«b«")«endl;
00260 #endif
00261
00262     POLY_GETIDENTITY(b);
00263
00264     vector<poly> s(1,b);
00265
00266     for (int i=0; i+1<(int)a.size(); i++) {
00267         poly A(BHEAD 1,b.modp,b.modn);
00268         for (int j=i+1; j<(int)a.size(); j++) A *= a[j];
00269
00270         vector<poly> t(extended_gcd_Euclidean_lifted(a[i],A));
00271         poly prev(s.back());
00272         s.back() = t[1] * prev % a[i];
00273         s.push_back(t[0] * prev % A);
00274     }
00275
00276 #ifdef DEBUGALL
00277     cout << "*** [" << thetime() << "]" RES : solve_Diophantine_univariate(" «a«","«b«") = "«s«endl;
00278 #endif
00279
00280     return s;
00281 }
00282
00283 /*
00284 #] solve_Diophantine_univariate :
00285 #[ solve_Diophantine_multivariate :
00286 */
00287
00319 const vector<poly> polyfact::solve_Diophantine_multivariate (const vector<poly> &a, const poly &b,
const vector<int> &x, const vector<int> &c, int d) {
00320
00321 #ifdef DEBUGALL
00322     cout << "*** [" << thetime() << "]" CALL: solve_Diophantine_multivariate("
«a«","«b«","«x«","«c«","«d«")«endl;
00323 #endif
00324
00325     POLY_GETIDENTITY(b);
00326
00327     if (b.is_zero()) return vector<poly>(a.size(),poly(BHEAD 0));
00328
00329     if (x.size() == 1) return solve_Diophantine_univariate(a,b);
00330
00331     // Reduce the polynomial with the homomorphism <xm-c{m-1}>
00332     poly simple(poly::simple_poly(BHEAD x.back(),c.back()));
00333
00334     vector<poly> ared(a);
00335     for (int i=0; i<(int)ared.size(); i++)
00336         ared[i] %= simple;

```

```

00337
00338     poly bred(b % simple);
00339     vector<int> xred(x.begin(), x.end()-1);
00340     vector<int> cred(c.begin(), c.end()-1);
00341
00342     // Solve the equation in one less variable
00343     vector<poly> s(solve_Diophantine_multivariate(ared, bred, xred, cred, d));
00344     if (s == vector<poly>()) return vector<poly>();
00345
00346     // Cache the Ai = product(aj | j!=i).
00347     vector<poly> A(a.size(), poly(BHEAD 1, b.modp, b.modn));
00348     for (int i=0; i<(int)a.size(); i++)
00349         for (int j=0; j<(int)a.size(); j++)
00350             if (i!=j) A[i] *= a[j];
00351
00352     // Add the powers (xm-c{m-1})^k with ideal-adic Newton iteration.
00353     poly term(BHEAD 1, b.modp, b.modn);
00354
00355     poly error(b);
00356     for (int i=0; i<(int)A.size(); i++)
00357         error -= s[i] * A[i];
00358
00359     for (int deg=1; deg<=d; deg++) {
00360
00361         if (error.is_zero()) break;
00362
00363         error /= simple;
00364         term *= simple;
00365
00366         vector<poly> ds(solve_Diophantine_multivariate(ared, error%simple, xred, cred, d));
00367         if (ds == vector<poly>()) return vector<poly>();
00368
00369         for (int i=0; i<(int)s.size(); i++) {
00370             s[i] += ds[i] * term;
00371             error -= ds[i] * A[i];
00372         }
00373     }
00374
00375     if (!error.is_zero()) return vector<poly>();
00376
00377 #ifdef DEBUGALL
00378     cout << "*** [" << thetime() << "] RES : solve_Diophantine_multivariate("
00379         << a<< ", " << b<< ", " << x<< ", " << c<< ", " << d<< ") = " << s<< endl;
00380 #endif
00381     return s;
00382 }
00383
00384 /*
00385 #] solve_Diophantine_multivariate :
00386 #[ lift_coefficients :
00387 */
00388
00421 const vector<poly> polyfact::lift_coefficients (const poly &_A, const vector<poly> &_a) {
00422
00423 #ifdef DEBUG
00424     cout << "*** [" << thetime() << "] CALL: lift_coefficients(" << _A<< ", " << _a<< ")" << endl;
00425 #endif
00426
00427     POLY_GETIDENTITY(_A);
00428
00429     poly A(_A);
00430     vector<poly> a(_a);
00431     poly term(BHEAD 1);
00432
00433     int x = A.first_variable();
00434
00435     // Replace the leading term of all factors with lterm(A) mod p
00436     poly lead(A.integer_lcoeff());
00437     for (int i=0; i<(int)a.size(); i++) {
00438         a[i] *= lead / a[i].integer_lcoeff();
00439         if (i>0) A*=lead;
00440     }
00441
00442     // Solve Diophantine equation
00443     vector<poly> s(solve_Diophantine_univariate(a, poly(BHEAD 1, A.modp, 1)));
00444
00445     // Replace the leading term of all factors with lterm(A) mod p^n
00446     for (int i=0; i<(int)a.size(); i++) {
00447         a[i].setmod(A.modp, A.modn);
00448         a[i] += (lead - a[i].integer_lcoeff()) * poly::simple_poly(BHEAD x, 0, a[i].degree(x));
00449     }
00450
00451     // Calculate the error, express it in terms of ai and add corrections.
00452     for (int k=2; k<=A.modn; k++) {
00453         term *= poly(BHEAD A.modp);

```

```

00454
00455     poly error(BHEAD -1);
00456     for (int i=0; i<(int)a.size(); i++) error *= a[i];
00457     error += A;
00458     if (error.is_zero()) break;
00459
00460     error /= term;
00461     error.setmod(A.modp,1);
00462
00463     for (int i=0; i<(int)a.size(); i++)
00464         a[i] += term * (error * s[i] % a[i]);
00465 }
00466
00467 // Fix leading coefficients by dividing out integer contents.
00468 for (int i=0; i<(int)a.size(); i++)
00469     a[i] /= polygcd::integer_content(poly(a[i],0,1));
00470
00471 #ifdef DEBUG
00472     cout << "*** [" << thetime() << "]" RES : lift_coefficients("<_A<","<_a<") = "<a<<endl;
00473 #endif
00474
00475     return a;
00476 }
00477
00478 /*
00479 #] lift_coefficients :
00480 #[ predetermine :
00481 */
00482
00497 void polyfact::predetermine (int dep, const vector<vector<int> > &state, vector<vector<vector<int> > >
    &terms, vector<int> &term, int sumdeg) {
00498     // store the term
00499     if (dep == (int)state.size()) {
00500         terms[sumdeg].push_back(term);
00501         return;
00502     }
00503
00504     // recursively create new terms
00505     term.push_back(0);
00506
00507     for (int deg=0; sumdeg+deg<(int)state[dep].size(); deg++)
00508         if (state[dep][deg] > 0) {
00509             term.back() = deg;
00510             predetermine(dep+1, state, terms, term, sumdeg+deg);
00511         }
00512
00513     term.pop_back();
00514 }
00515
00516 /*
00517 #] predetermine :
00518 #[ lift_variables :
00519 */
00520
00558 const vector<poly> polyfact::lift_variables (const poly &A, const vector<poly> &_a, const vector<int>
    &x, const vector<int> &c, const vector<poly> &lc) {
00559
00560 #ifdef DEBUG
00561     cout << "*** [" << thetime() << "]" CALL: lift_variables("<A<","<_a<","<x<","<c<","<lc<")\n";
00562 #endif
00563
00564     // If univariate, don't lift
00565     if (x.size()<=1) return _a;
00566
00567     POLY_GETIDENTITY(A);
00568
00569     vector<poly> a(_a);
00570
00571     // First method: predetermine coefficients
00572
00573     // check feasibility, otherwise it tries too many possibilities
00574     int cnt = POLYFACT_MAX_PREDETERMINATION;
00575     for (int i=0; i<(int)a.size(); i++) {
00576         if (a[i].number_of_terms() == 0) return vector<poly>();
00577         cnt /= a[i].number_of_terms();
00578     }
00579
00580     if (cnt>0) {
00581         // state[n][d]: coefficient of x^d in a[n] is
00582         // 0: non-existent, 1: undetermined, 2: determined
00583         int D = A.degree(x[0]);
00584         vector<vector<int> > state(a.size(), vector<int>(D+1, 0));
00585
00586         for (int i=0; i<(int)a.size(); i++)
00587             for (int j=1; j<a[i][0]; j+=a[i][j])
00588                 state[i][a[i][j+1+x[0]]] = j==1 ? 2 : 1;
00589

```

```

00590         // collect all products of terms
00591         vector<vector<vector<int> > > terms(D+1);
00592         vector<int> term;
00593         predetermine(0, state, terms, term);
00594
00595         // count the number of undetermined coefficients
00596         vector<int> num_undet (terms.size(), 0);
00597         for (int i=0; i<(int)terms.size(); i++)
00598             for (int j=0; j<(int)terms[i].size(); j++)
00599                 for (int k=0; k<(int)terms[i][j].size(); k++)
00600                     if (state[k][terms[i][j][k]] == 1) num_undet[i]++;
00601
00602         // replace the current leading coefficients by the correct ones
00603         for (int i=0; i<(int)a.size(); i++)
00604             a[i] += (lc[i] - a[i].lcoeff_univar(x[0])) * poly::simple_poly(BHEAD
x[0], 0, a[i].degree(x[0]));
00605
00606         bool changed;
00607         do {
00608             changed = false;
00609
00610             for (int i=0; i<(int)terms.size(); i++) {
00611                 // is only one coefficient in a equation is undetermined, solve
00612                 // the equation to determine this coefficient
00613                 if (num_undet[i] == 1) {
00614                     // generate equation
00615                     poly lhs(BHEAD 0), rhs(A.coefficient(x[0], i), A.modp, A.modn);
00616                     int which_idx=-1, which_deg=-1;
00617                     for (int j=0; j<(int)terms[i].size(); j++) {
00618                         poly coeff(BHEAD 1, A.modp, A.modn);
00619                         bool undet=false;
00620                         for (int k=0; k<(int)terms[i][j].size(); k++) {
00621                             if (state[k][terms[i][j][k]] == 1) {
00622                                 undet = true;
00623                                 which_idx=k;
00624                                 which_deg=terms[i][j][k];
00625                             }
00626                             else
00627                                 coeff *= a[k].coefficient(x[0], terms[i][j][k]);
00628                         }
00629                         if (undet)
00630                             lhs = coeff;
00631                         else
00632                             rhs -= coeff;
00633                     }
00634                     // solve equation
00635                     if (A.modn > 1) rhs.setmod(0, 1);
00636                     if (lhs.is_zero() || !(rhs%lhs).is_zero()) return vector<poly>();
00637                     a[which_idx] += (rhs / lhs - a[which_idx].coefficient(x[0], which_deg)) *
poly::simple_poly(BHEAD x[0], 0, which_deg);
00638                     state[which_idx][which_deg] = 2;
00639
00640                     // update number of undetermined coefficients
00641                     for (int j=0; j<(int)terms.size(); j++)
00642                         for (int k=0; k<(int)terms[j].size(); k++)
00643                             if (terms[j][k][which_idx] == which_deg)
00644                                 num_undet[j]--;
00645
00646                     changed = true;
00647                 }
00648             }
00649         } while (changed);
00650
00651         // if this is the complete result, skip lifting
00652         poly check(BHEAD 1, A.modn>1?A.modp, 1);
00653         for (int i=0; i<(int)a.size(); i++)
00654             check *= a[i];
00655
00656         if (check == A) return a;
00657     }
00658
00659     // Second method: Hensel lifting
00660
00661     // Calculate A and lc's modulo Ii = <xi-c[i-1], ..., xm-c[m-1]> (for i=2, ..., m)
00662     vector<poly> simple(x.size(), poly(BHEAD 0));
00663     for (int i=(int)x.size()-2; i>=0; i--)
00664         simple[i] = poly::simple_poly(BHEAD x[i+1], c[i], 1);
00665
00666     // Calculate the maximum degree of A in x2, ..., xm
00667     int maxdegA=0;
00668     for (int i=1; i<(int)x.size(); i++)
00669         maxdegA = MaX(maxdegA, A.degree(x[i]));
00670
00671     // Iteratively add the variables x2, ..., xm
00672     for (int xi=1; xi<(int)x.size(); xi++) {
00673         // replace the current leading coefficients by the correct ones

```



```

00675         for (int i=0; i<(int)a.size(); i++)
00676             a[i] += (lc[i] - a[i].lcoeff_univar(x[0])) * poly::simple_poly(BHEAD
x[0],0,a[i].degree(x[0]));
00677
00678         vector<poly> anew(a);
00679         for (int i=0; i<(int)anew.size(); i++)
00680             for (int j=xi-1; j<(int)c.size(); j++)
00681                 anew[i] %= simple[j];
00682
00683         vector<int> xnew(x.begin(), x.begin()+xi);
00684         vector<int> cnew(c.begin(), c.begin()+xi-1);
00685         poly term(BHEAD 1,A.modp,A.modn);
00686
00687         // Iteratively add the powers xi^k
00688         for (int deg=1, maxdeg=A.degree(x[xi]); deg<=maxdeg; deg++) {
00689
00690             term *= simple[xi-1];
00691
00692             // Calculate the error, express it in terms of ai and add corrections.
00693             poly error(BHEAD -1,A.modp,A.modn);
00694             for (int i=0; i<(int)a.size(); i++) error += a[i];
00695             error += A;
00696             for (int i=xi; i<(int)c.size(); i++) error %= simple[i];
00697
00698             if (error.is_zero()) break;
00699
00700             error /= term;
00701             error %= simple[xi-1];
00702
00703             vector<poly> s(solve_Diophantine_multivariate(anew,error,xnew,cnew,maxdegA));
00704             if (s == vector<poly>()) return vector<poly>();
00705
00706             for (int i=0; i<(int)a.size(); i++)
00707                 a[i] += s[i] * term;
00708         }
00709
00710         // check whether PRODUCT(a[i]) = A mod <xi-c{i-1},...,xm-c{m-1}> over the integers or ZZ/p
00711         poly check(BHEAD -1, A.modn>1?0:A.modp, 1);
00712         for (int i=0; i<(int)a.size(); i++) check *= a[i];
00713         check += A;
00714         for (int i=xi; i<(int)c.size(); i++) check %= simple[i];
00715         if (!check.is_zero()) return vector<poly>();
00716     }
00717
00718 #ifdef DEBUG
00719     cout << "*** [" << thetime() << "]" RES : lift_variables("«A«", "«_a«", "«x«", "«c«", "«lc«") = " << a <<
endl;
00720 #endif
00721
00722     return a;
00723 }
00724
00725 /*
00726 #] lift_variables :
00727 #[ choose_prime :
00728 */
00729
00741 WORD polyfact::choose_prime (const poly &a, const vector<int> &x, WORD p) {
00742
00743 #ifdef DEBUG
00744     cout << "*** [" << thetime() << "]" CALL: choose_prime("«a«", "«x«", "«p«") << endl;
00745 #endif
00746
00747     POLY_GETIDENTITY(a);
00748
00749     poly icont_lcoeff(polygcd::integer_content(a.lcoeff_univar(x[0])));
00750
00751     if (p==0) p = POLYFACT_FIRST_PRIME;
00752
00753     poly icont_lcoeff_modp(BHEAD 0);
00754
00755     do {
00756
00757         bool is_prime;
00758
00759         do {
00760             p += 2;
00761             is_prime = true;
00762             for (int d=2; d*d<=p; d++)
00763                 if (p%d==0) { is_prime=false; break; }
00764         }
00765         while (!is_prime);
00766
00767         icont_lcoeff_modp = icont_lcoeff;
00768         icont_lcoeff_modp.setmod(p,1);
00769     }
00770     while (icont_lcoeff_modp.is_zero());

```

```

00771
00772 #ifdef DEBUG
00773     cout << "*** [" << thetime() << "]" RES : choose_prime("«a«", "«x«", ?) = "«p«endl;
00774 #endif
00775
00776     return p;
00777 }
00778
00779 /*
00780 #] choose_prime :
00781 #[ choose_prime_power :
00782 */
00783
00798 WORD polyfact::choose_prime_power (const poly &a, WORD p) {
00799
00800 #ifdef DEBUG
00801     cout << "*** [" << thetime() << "]" CALL: choose_prime_power("«a«", "«p«") "«endl;
00802 #endif
00803
00804     POLY_GETIDENTITY(a);
00805
00806     // analyse the polynomial for calculating the bound
00807     double maxdegree=0, maxlogcoeff=0, numterms=0;
00808
00809     for (int i=1; i<a[0]; i+=a[i]) {
00810         for (int j=0; j<AN.poly_num_vars; j++)
00811             maxdegree = MaX(maxdegree, a[i+1+j]);
00812
00813         maxlogcoeff = MaX(maxlogcoeff,
00814             log(1.0+(UWORD)a[i+a[i]-2]) + // most
00815             significant digit + 1
00816             BITSINWORD*log(2.0)*(ABS(a[i+a[i]-1])-1)); // number of
00817             digits
00818             numterms++;
00819     }
00820
00821     WORD res = (WORD)ceil((log((sqrt(5.0)+1)/2)*maxdegree + maxlogcoeff + 0.5*log(numterms)) /
00822         log((double)p));
00823
00824 #ifdef DEBUG
00825     cout << "*** [" << thetime() << "]" CALL: choose_prime_power("«a«", "«p«") = "«res«endl;
00826 #endif
00827
00828     return res;
00829 }
00830
00831 /*
00832 #] choose_prime_power :
00833 #[ choose_ideal :
00834 */
00835
00860 const vector<int> polyfact::choose_ideal (const poly &a, int p, const factorized_poly &lc, const
vector<int> &x) {
00861
00862 #ifdef DEBUG
00863     cout << "*** [" << thetime() << "]" CALL: polyfact::choose_ideal("
00864         «a«", "«p«", "«lc«", "«x«") "«endl;
00865 #endif
00866
00867     if (x.size()==1) return vector<int>();
00868
00869     POLY_GETIDENTITY(a);
00870
00871     vector<int> c(x.size()-1);
00872
00873     int dega = a.degree(x[0]);
00874     poly amodI(a);
00875
00876     // choose random c
00877     for (int i=0; i<(int)c.size(); i++) {
00878         c[i] = 1 + wranf(BHEAD0) % ((p-1) / POLYFACT_IDEAL_FRACTION);
00879         amodI %= poly::simple_poly(BHEAD x[i+1], c[i], 1);
00880     }
00881
00882     poly amodIp(amodI);
00883     amodIp.setmod(p, 1);
00884
00885     // check if leading coefficient is non-zero [equivalent to degree=old_degree]
00886     if (amodIp.degree(x[0]) != dega)
00887         return c = vector<int>();
00888
00889     // check if leading coefficient is squarefree [equivalent to gcd(a,a')==const]
00890     if (!polygcd::gcd_Euclidean(amodIp, amodIp.derivative(x[0])).is_integer())
00891         return c = vector<int>();
00892
00893     if (a.modp>0 && a.modn==1) return c;
00894

```

```

00895 // check for unique prime factors in each factor lc[i] of the leading coefficient
00896 vector<poly> d(1, polygcd::integer_content(amodI));
00897
00898 for (int i=0; i<(int)lc.factor.size(); i++) {
00899     // constant factor
00900     if (i==0 && lc.factor[i].is_integer()) {
00901         d[0] *= lc.factor[i];
00902         continue;
00903     }
00904
00905     // factor modulo I
00906     poly q(lc.factor[i]);
00907     for (int j=0; j<(int)c.size(); j++)
00908         q %= poly::simple_poly(BHEAD x[j+1],c[j]);
00909     if (q.sign() == -1) q *= poly(BHEAD -1);
00910
00911     // divide out common factors
00912     for (int j=(int)d.size()-1; j>=0; j--) {
00913         poly r(d[j]);
00914         while (!r.is_one()) {
00915             r = polygcd::integer_gcd(r,q);
00916             q /= r;
00917         }
00918     }
00919
00920     // check whether there is some factor left
00921     if (q.is_one()) return vector<int>();
00922     d.push_back(q);
00923 }
00924
00925 #ifdef DEBUG
00926     cout << "*** [" << thetime() << "] RES : polyfact::choose_ideal("
00927         <<a<<","<p<<","<lc<<","<x<<") = "<c<<endl;
00928 #endif
00929     return c;
00930 }
00931
00932 /*
00933 #] choose_ideal :
00934 #[ squarefree_factors_Yun :
00935 */
00936
00937 const factorized_poly polyfact::squarefree_factors_Yun (const poly &a) {
00938     factorized_poly res;
00939     poly a(_a);
00940
00941     int pow = 1;
00942     int x = a.first_variable();
00943
00944     poly b(a.derivative(x));
00945     poly c(polygcd::gcd(a,b));
00946
00947     while (true) {
00948         a /= c;
00949         b /= c;
00950         b -= a.derivative(x);
00951         if (b.is_zero()) break;
00952         c = polygcd::gcd(a,b);
00953         if (!c.is_one()) res.add_factor(c,pow);
00954         pow++;
00955     }
00956
00957     if (!a.is_one()) res.add_factor(a,pow);
00958     return res;
00959 }
00960
00961 /*
00962 #] squarefree_factors_Yun :
00963 #[ squarefree_factors_modp :
00964 */
00965
00966 const factorized_poly polyfact::squarefree_factors_modp (const poly &a) {
00967     factorized_poly res;
00968     poly a(_a);
00969
00970     int pow = 1;
00971     int x = a.first_variable();
00972     poly b(a.derivative(x));
00973
00974     // poly contains terms of the form c(x)^n (n!=c*p)
00975     if (!b.is_zero()) {
00976         poly c(polygcd::gcd(a,b));
00977         a /= c;
00978     }

```

```

00994         while (!a.is_one()) {
00995             b = polygcd::gcd(a,c);
00996             a /= b;
00997             if (!a.is_one()) res.add_factor(a,pow);
00998             pow++;
00999             a = b;
01000             c /= a;
01001         }
01002
01003         a = c;
01004     }
01005
01006     // polynomial contains terms of the form c(x)^p
01007     if (!a.is_one()) {
01008         for (int i=1; i<a[1]; i+=a[i])
01009             a[i+1+x] /= a.modp;
01010         factorized_poly res2(squarefree_factors(a));
01011         for (int i=0; i<(int)res2.factor.size(); i++) {
01012             res.factor.push_back(res2.factor[i]);
01013             res.power.push_back(a.modp*res2.power[i]);
01014         }
01015     }
01016
01017     return res;
01018 }
01019
01020 /*
01021 #] squarefree_factors_modp :
01022 #[ squarefree_factors :
01023 */
01024
01045 const factorized_poly polyfact::squarefree_factors (const poly &a) {
01046
01047 #ifdef DEBUG
01048     cout << "*** [" << thetime() << " ] CALL: squarefree_factors("«a«")\n";
01049 #endif
01050
01051     if (a.is_one()) return factorized_poly();
01052
01053     factorized_poly res;
01054
01055     if (a.modp==0)
01056         res = squarefree_factors_Yun(a);
01057     else
01058         res = squarefree_factors_modp(a);
01059
01060 #ifdef DEBUG
01061     cout << "*** [" << thetime() << " ] RES : squarefree_factors("«a«") = "«res«"\n";
01062 #endif
01063
01064     return res;
01065 }
01066
01067 /*
01068 #] squarefree_factors :
01069 #[ Berlekamp_Qmatrix :
01070 */
01071
01094 const vector<vector<WORD> > polyfact::Berlekamp_Qmatrix (const poly &a) {
01095
01096 #ifdef DEBUG
01097     cout << "*** [" << thetime() << " ] CALL: Berlekamp_Qmatrix("«_a«")\n";
01098 #endif
01099
01100     if (_a.all_variables() == vector<int>())
01101         return vector<vector<WORD> >(0);
01102
01103     POLY_GETIDENTITY(_a);
01104
01105     poly a(_a);
01106     int x = a.first_variable();
01107     int n = a.degree(x);
01108     int p = a.modp;
01109
01110     poly lc(a.integer_lcoeff());
01111     a /= lc;
01112
01113     vector<vector<WORD> > Q(n, vector<WORD>(n));
01114
01115     // c is the vector of coefficients of the polynomial a
01116     vector<WORD> c(n+1,0);
01117     for (int j=1; j<a[0]; j+=a[j])
01118         c[a[j+1+x]] = a[j+1+AN.poly_num_vars] * a[j+2+AN.poly_num_vars];
01119
01120     // d is the vector of coefficients of x^i mod a, starting with i=0
01121     vector<WORD> d(n,0);
01122     d[0]=1;

```

```

01123
01124     for (int i=0; i<=(n-1)*p; i++) {
01125         // store the coefficients of x^(i*p) mod a
01126         if (i%p==0) Q[i/p] = d;
01127
01128         // transform d=x^i mod a into d=x^(i+1) mod a
01129         vector<WORD> e(n);
01130         for (int j=0; j<n; j++) {
01131             e[j] = (- (LONG)d[n-1]*c[j] + (j>0?d[j-1]:0)) % p;
01132             if (e[j]<0) e[j]+=p;
01133         }
01134
01135         d=e;
01136     }
01137
01138     // Q = Q - I
01139     for (int i=0; i<n; i++)
01140         Q[i][i] = (Q[i][i] - 1 + p) % p;
01141
01142     // Gaussian elimination
01143     for (int i=0; i<n; i++) {
01144         // Find pivot
01145         int ii=i; while (ii<n && Q[ii][ii]==0) ii++;
01146         if (ii==n) continue;
01147
01148         for (int k=0; k<n; k++)
01149             swap(Q[k][ii],Q[k][i]);
01150
01151         // normalize row i, which becomes the pivot
01152         WORD mul;
01153         GetModInverses (Q[i][i], p, &mul, NULL);
01154         vector<int> idx;
01155
01156         for (int k=0; k<n; k++) if (Q[k][i] != 0) {
01157             // store indices of non-zero elements for sparse matrices
01158             idx.push_back(k);
01159             Q[k][i] = ((LONG)Q[k][i] * mul) % p;
01160         }
01161
01162         // reduce
01163         for (int j=0; j<n; j++)
01164             if (j!=i && Q[i][j]!=0) {
01165                 LONG mul = Q[i][j];
01166                 for (int k=0; k<(int)idx.size(); k++) {
01167                     Q[idx[k]][j] = (Q[idx[k]][j] - mul*Q[idx[k]][i]) % p;
01168                     if (Q[idx[k]][j] < 0) Q[idx[k]][j]+=p;
01169                 }
01170             }
01171     }
01172
01173     for (int i=0; i<n; i++) {
01174         // Q = Q - I
01175         Q[i][i] = Q[i][i]-1;
01176
01177         // reduce all coefficients in the range 0,1,...,p-1
01178         for (int j=0; j<n; j++) {
01179             Q[i][j] = -Q[i][j]%p;
01180             if (Q[i][j]<0) Q[i][j]+=p;
01181         }
01182     }
01183
01184 #ifdef DEBUG
01185     cout << "*** [" << thetime() << "]" RES : Berlekamp_Qmatrix("<a") = "<Q"\n";
01186 #endif
01187
01188     return Q;
01189 }
01190
01191 /*
01192 #] Berlekamp_Qmatrix :
01193 #[ Berlekamp_find_factors :
01194 */
01195
01219 const vector<poly> polyfact::Berlekamp_find_factors (const poly &a, const vector<vector<WORD> > &q)
01220 {
01221 #ifdef DEBUG
01222     cout << "*** [" << thetime() << "]" CALL: Berlekamp_find_factors("<a","<q")\n";
01223 #endif
01224
01225     if (<a.all_variables() == vector<int>()) return vector<poly>(1,<a);
01226
01227     POLY_GETIDENTITY(<a);
01228
01229     vector<vector<WORD> > q=<q;
01230
01231     int rank=0;

```

```

01232     for (int i=0; i<(int)q.size(); i++)
01233         if (q[i]!=vector<WORD>(q[i].size(),0)) rank++;
01234
01235     poly a(_a);
01236     int x = a.first_variable();
01237     int n = a.degree(x);
01238     int p = a.modp;
01239
01240     a /= a.integer_lcoeff();
01241
01242     // Vector of factors, represented as dense polynomials mod p
01243     vector<vector<WORD> > fac(1, vector<WORD>(n+1,0));
01244
01245     fac[0] = poly::to_coefficient_list(a);
01246     bool finished=false;
01247
01248     // Loop over the columns of q + constant, i.e., an exhaustive list of possible factors
01249     for (int i=1; i<n && !finished; i++) {
01250         if (q[i] == vector<WORD>(n,0)) continue;
01251
01252         for (int s=0; s<p && !finished; s++) {
01253             for (int j=0; j<(int)fac.size() && !finished; j++) {
01254                 vector<WORD> c = polygcd::coefficient_list_gcd(fac[j], q[i], p);
01255
01256                 // If a non-trivial factor is found, add it to the list
01257                 if (c.size()!=1 && c.size()!=fac[j].size()) {
01258                     fac.push_back(c);
01259                     fac[j] = poly::coefficient_list_divmod(fac[j], c, p, 0);
01260                     if ((int)fac.size() == rank) finished=true;
01261                 }
01262             }
01263
01264             // Increase the constant term by one
01265             q[i][0] = (q[i][0]+1) % p;
01266         }
01267     }
01268
01269     // Convert the densely represented polynomials to sparse ones
01270     vector<poly> res(fac.size(),poly(BHEAD 0, p));
01271     for (int i=0; i<(int)fac.size(); i++)
01272         res[i] = poly::from_coefficient_list(BHEAD fac[i],x,p);
01273
01274 #ifdef DEBUG
01275     cout << "*** [" << thetime() << "] RES : Berlekamp_find_factors(" <<_a<<"," <<q<<) = " <<res<<"\n";
01276 #endif
01277
01278     return res;
01279 }
01280
01281 /*
01282 #] Berlekamp_find_factors :
01283 #[ combine_factors :
01284 */
01285
01307 const vector<poly> polyfact::combine_factors (const poly &a, const vector<poly> &f) {
01308
01309 #ifdef DEBUG
01310     cout << "*** [" << thetime() << "] CALL: combine_factors(" <<a<<"," <<f<<")\n";
01311 #endif
01312
01313     POLY_GETIDENTITY(a);
01314
01315     poly a0(a,0,1);
01316     vector<poly> res;
01317
01318     int num_used = 0;
01319     vector<bool> used(f.size(), false);
01320
01321     // Loop over all bitmasks with num=1,2,...,size(factors)/2 bits
01322     // set, that contain only unused factors
01323     for (int num=1; num<=(int)(f.size() - num_used)/2; num++) {
01324         vector<int> next(f.size() - num_used, 0);
01325         for (int i=0; i<num; i++) next[next.size()-1-i] = 1;
01326
01327         do {
01328             poly fac(BHEAD 1,a.modp,a.modn);
01329             for (int i=0, j=0; i<(int)f.size(); i++)
01330                 if (!used[i] && next[j++]) fac *= f[i];
01331             fac /= fac.integer_lcoeff();
01332             fac *= a.integer_lcoeff();
01333             fac /= polygcd::integer_content(poly(fac,0,1));
01334
01335             if ((a0 % fac).is_zero()) {
01336                 res.push_back(fac);
01337                 for (int i=0, j=0; i<(int)f.size(); i++)
01338                     if (!used[i]) used[i] = next[j++];
01339                 num_used += num;

```

```

01340         num--;
01341         break;
01342     }
01343 }
01344 while (next_permutation(next.begin(), next.end()));
01345 }
01346
01347 // All unused factors together form one more factor
01348 if (num_used != (int)f.size()) {
01349     poly fac(BHEAD 1, a.modp, a.modn);
01350     for (int i=0; i<(int)f.size(); i++)
01351         if (!used[i]) fac *= f[i];
01352     fac /= fac.integer_lcoeff();
01353     fac *= a.integer_lcoeff();
01354     fac /= polygcd::integer_content(poly(fac, 0, 1));
01355     res.push_back(fac);
01356 }
01357
01358 #ifdef DEBUG
01359     cout << "*** [" << thetime() << " ] RES : combine_factors(" << a << ", " << f << ") = " << res << "\n";
01360 #endif
01361
01362     return res;
01363 }
01364
01365 /*
01366 #] combine_factors :
01367 #[ factorize_squarefree :
01368 */
01369
01388 const vector<poly> polyfact::factorize_squarefree (const poly &a, const vector<int> &x) {
01389
01390     #ifdef DEBUG
01391         cout << "*** [" << thetime() << " ] CALL: factorize_squarefree(" << a << ") \n";
01392     #endif
01393
01394     POLY_GETIDENTITY(a);
01395
01396     WORD p=a.modp, n=a.modn;
01397
01398     try_again:
01399
01400     int bestp=0;
01401     int min_factors = INT_MAX;
01402     poly amodI(BHEAD 0), bestamodI(BHEAD 0);
01403     vector<int> c,d,bestc,bestd;
01404     vector<vector<WORD>> > q,bestq;
01405
01406     // Factorize leading coefficient
01407     factorized_poly lc(factorize(a.lcoeff_univar(x[0])));
01408
01409     // Try a number of primes
01410     int prime_tries = 0;
01411
01412     while (prime_tries<POLYFACT_NUM_CONFIRMATIONS && min_factors>1) {
01413         if (a.modp == 0) {
01414             p = choose_prime(a,x,p);
01415             n = 0;
01416             if (a.degree(x[0]) % p == 0) continue;
01417
01418             // Univariate case: check whether the polynomial mod p is squarefree
01419             // Multivariate case: this check is done after choosing I (for efficiency)
01420             if (x.size()==1) {
01421                 poly amodp(a,p,1);
01422                 if (polygcd::gcd_Euclidean(amodp, amodp.derivative(x[0])).degree(x[0]) != 0)
01423                     continue;
01424             }
01425         }
01426
01427         // Try a number of ideals
01428         if (x.size()>1)
01429             for (int ideal_tries=0; ideal_tries<POLYFACT_MAX_IDEAL_TRIES; ideal_tries++) {
01430                 c = choose_ideal(a,p,lc,x);
01431                 if (c.size()>0) break;
01432             }
01433
01434         if (x.size()==1 || c.size()>0) {
01435             amodI = a;
01436             for (int i=0; i<(int)c.size(); i++)
01437                 amodI %= poly::simple_poly(BHEAD x[i+1], c[i]);
01438
01439             // Determine Q-matrix and its rank. Smaller rank is better.
01440             q = Berlekamp_Qmatrix(poly(amodI,p,1));
01441             int rank=0;
01442             for (int i=0; i<(int)q.size(); i++)
01443                 if (q[i]!=vector<WORD>(q[i].size(),0)) rank++;
01444

```

```

01445         if (rank<min_factors) {
01446             bestp=p;
01447             bestc=c;
01448             bestq=q;
01449             bestamodI=amodI;
01450             min_factors = rank;
01451             prime_tries = 0;
01452         }
01453
01454         if (rank==min_factors)
01455             prime_tries++;
01456
01457 #ifdef DEBUG
01458     cout << "*** [" << thetime() << "] (A) : factorize_squarefree("a«
01459         " try p=" << p << " #factors=" << rank << " (min="«min_factors«"x"«prime_tries«")" << endl;
01460 #endif
01461     }
01462 }
01463
01464 p=bestp;
01465 c=bestc;
01466 q=bestq;
01467 amodI=bestamodI;
01468
01469 // Determine to which power of p to lift
01470 if (n==0) {
01471     n = choose_prime_power(amodI,p);
01472     n = MaX(n, choose_prime_power(a,p));
01473 }
01474
01475 amodI.setmod(p,n);
01476
01477 #ifdef DEBUG
01478     cout << "*** [" << thetime() << "] (B) : factorize_squarefree("a«
01479         " chosen c = " << c << ", p^n = "«p«"^"«n«endl;
01480     cout << "*** [" << thetime() << "] (C) : factorize_squarefree("a«
01481         " #factors = " << min_factors << endl;
01482 #endif
01483
01484 // Find factors
01485 vector<poly> f(Berlekamp_find_factors(poly(amodI,p,1),q));
01486
01487 // Lift coefficients
01488 if (f.size() > 1) {
01489     f = lift_coefficients(amodI,f);
01490     if (f==vector<poly>()) {
01491 #ifdef DEBUG
01492         cout << "factor_squarefree failed (lift_coeff step) : " << endl;
01493 #endif
01494         goto try_again;
01495     }
01496
01497 // Combine factors
01498 if (a.modp==0) f = combine_factors(amodI,f);
01499 }
01500
01501 // Lift variables
01502 if (f.size() == 1)
01503     f = vector<poly>(1, a);
01504
01505 if (x.size() > 1 && f.size() > 1) {
01506
01507     // The correct leading coefficients of the factors can be
01508     // reconstructed from prime number factors of the leading
01509     // coefficients modulo I. This is possible since all factors of
01510     // the leading coefficient have unique prime factors for the ideal
01511     // I is chosen as such.
01512
01513     poly amodI(a);
01514     for (int i=0; i<(int)c.size(); i++)
01515         amodI %= poly::simple_poly(BHEAD x[i+1],c[i]);
01516     poly delta(polygcd::integer_content(amodI));
01517
01518     vector<poly> lcmmodI(lc.factor.size(), poly(BHEAD 0));
01519     for (int i=0; i<(int)lc.factor.size(); i++) {
01520         lcmmodI[i] = lc.factor[i];
01521         for (int j=0; j<(int)c.size(); j++)
01522             lcmmodI[i] %= poly::simple_poly(BHEAD x[j+1],c[j]);
01523     }
01524
01525     vector<poly> correct_lc(f.size(), poly(BHEAD 1,p,n));
01526
01527     for (int j=0; j<(int)f.size(); j++) {
01528         poly lc_f(f[j].integer_lcoeff() * delta);
01529         WORD nlc_f = lc_f[lc_f[1]];
01530         poly quo(BHEAD 0,rem(BHEAD 0);
01531         WORD nquo,nrem;

```



```

01532
01533     for (int i=(int)lcmmodI.size()-1; i>=0; i--) {
01534
01535         if (i==0 && lc.factor[i].is_integer()) continue;
01536
01537         do {
01538             DivLong((UWORD *)&lc_f[2+AN.poly_num_vars], nlc_f,
01539                     (UWORD *)&lcmmodI[i][2+AN.poly_num_vars], lcmmodI[i][lcmmodI[i][1]],
01540                     (UWORD *)&quo[0], &nquo,
01541                     (UWORD *)&rem[0], &nrem);
01542
01543             if (nrem == 0) {
01544                 correct_lc[j] *= lc.factor[i];
01545                 lc_f.termscopy(&quo[0], 2+AN.poly_num_vars, ABS(nquo));
01546                 nlc_f = nquo;
01547             }
01548         } while (nrem == 0);
01549     }
01550 }
01551
01552
01553 for (int i=0; i<(int)correct_lc.size(); i++) {
01554     poly correct_modI(correct_lc[i]);
01555     for (int j=0; j<(int)c.size(); j++)
01556         correct_modI %= poly::simple_poly(BHEAD x[j+1],c[j]);
01557
01558     poly d(polygcd::integer_gcd(correct_modI, f[i].integer_lcoeff()));
01559     correct_lc[i] *= f[i].integer_lcoeff() / d;
01560     delta /= correct_modI / d;
01561     f[i] *= correct_modI / d;
01562 }
01563
01564 // increase n, because of multiplying with delta
01565 if (!delta.is_one()) {
01566     poly deltapow(BHEAD 1);
01567     for (int i=1; i<(int)correct_lc.size(); i++)
01568         deltapow *= delta;
01569     while (!deltapow.is_zero()) {
01570         deltapow /= poly(BHEAD p);
01571         n++;
01572     }
01573
01574     for (int i=0; i<(int)f.size(); i++) {
01575         f[i].modn = n;
01576         correct_lc[i].modn = n;
01577     }
01578 }
01579
01580 poly aa(a,p,n);
01581
01582 for (int i=0; i<(int)correct_lc.size(); i++) {
01583     correct_lc[i] *= delta;
01584     f[i] *= delta;
01585     if (i>0) aa *= delta;
01586 }
01587
01588 f = lift_variables(aa,f,x,c,correct_lc);
01589
01590 for (int i=0; i<(int)f.size(); i++)
01591     if (a.modp == 0)
01592         f[i] /= polygcd::integer_content(poly(f[i],0,1));
01593     else
01594         f[i] /= polygcd::content_univar(f[i], x[0]);
01595
01596 if (f==vector<poly>()) {
01597 #ifdef DEBUG
01598     cout << "factor_squarefree failed (lift_var step)" << endl;
01599 #endif
01600     goto try_again;
01601 }
01602
01603 // set modulus of the factors correctly
01604 if (a.modp==0)
01605     for (int i=0; i<(int)f.size(); i++)
01606         f[i].setmod(0,1);
01607
01608 // Final check (not sure if this is necessary, but it doesn't hurt)
01609 poly check(BHEAD 1,a.modp,a.modn);
01610 for (int i=0; i<(int)f.size(); i++)
01611     check *= f[i];
01612
01613 if (check != a) {
01614 #ifdef DEBUG
01615     cout << "factor_squarefree failed (final check) : " << f << endl;
01616 #endif
01617     goto try_again;
01618 }

```

```

01619     }
01620
01621 #ifdef DEBUG
01622     cout << "*** [" << thetime() << "]" RES : factorize_squarefree("«a«", "«x«", "«c«") = "«f«"\n";
01623 #endif
01624
01625     return f;
01626 }
01627
01628 /*
01629 #] factorize_squarefree :
01630 #[ factorize :
01631 */
01632
01641 const factorized_poly polyfact::factorize (const poly &a) {
01642
01643 #ifdef DEBUG
01644     cout << "*** [" << thetime() << "]" CALL: factorize("«a«")\n";
01645 #endif
01646     vector<int> x = a.all_variables();
01647
01648     // No variables, so just one factor
01649     if (x.size() == 0) {
01650         factorized_poly res;
01651         if (a.is_one()) return res;
01652         res.add_factor(a,1);
01653         return res;
01654     }
01655
01656     // Remove content
01657     poly conta(polygcd::content_univar(a,x[0]));
01658
01659     factorized_poly faca(factorize(conta));
01660
01661     poly ppa(a / conta);
01662
01663     // Find a squarefree factorization
01664     factorized_poly b(squarefree_factors(ppa));
01665
01666 #ifdef DEBUG
01667     cout << "*** [" << thetime() << "]" ... : factorize("«a«") : SFF = "«b«"\n";
01668 #endif
01669
01670     // Factorize each squarefree factor and build the "factorized_poly"
01671     for (int i=0; i<(int)b.factor.size(); i++) {
01672
01673         vector<poly> c(factorize_squarefree(b.factor[i], x));
01674
01675         for (int j=0; j<(int)c.size(); j++) {
01676             faca.factor.push_back(c[j]);
01677             faca.power.push_back(b.power[i]);
01678         }
01679     }
01680
01681 #ifdef DEBUG
01682     cout << "*** [" << thetime() << "]" RES : factorize("«a«") = "«faca«"\n";
01683 #endif
01684
01685     return faca;
01686 }
01687
01688 /*
01689 #] factorize :
01690 */

```

4.107 polyfact.h

```

00001 #pragma once
00002 /* #[ License : */
00003 /*
00004 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00005 *   When using this file you are requested to refer to the publication
00006 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00007 *   This is considered a matter of courtesy as the development was paid
00008 *   for by FOM the Dutch physics granting agency and we would like to
00009 *   be able to track its scientific use to convince FOM of its value
00010 *   for the community.
00011 *
00012 *   This file is part of FORM.
00013 *
00014 *   FORM is free software: you can redistribute it and/or modify it under the
00015 *   terms of the GNU General Public License as published by the Free Software
00016 *   Foundation, either version 3 of the License, or (at your option) any later

```

```


00017 *   version.
00018 *
00019 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00020 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00021 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00022 *   details.
00023 *
00024 *   You should have received a copy of the GNU General Public License along
00025 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00026 */
00027 /* #] License : */
00028
00029 #include <vector>
00030 #include <string>
00031
00032 // First prime modulo which factorization is tried. Too small results
00033 // in more unsuccessful attempts; too large is slower.
00034 const int POLYFACT_FIRST_PRIME = 17;
00035
00036 // Fraction of [1,p) that is used for substitutions of variables. Too
00037 // small results in more unsuccessful attempts; too large is slower.
00038 const int POLYFACT_IDEAL_FRACTION = 5;
00039
00040 // Number of ideals that are tried before failure due to unlucky
00041 // choices is accepted.
00042 const int POLYFACT_MAX_IDEAL_TRIES = 3;
00043
00044 // Number of confirmations for the minimal number of factors before
00045 // Hensel lifting is started.
00046 const int POLYFACT_NUM_CONFIRMATIONS = 3;
00047
00048 // Maximum number of equations for predetermination of coefficients
00049 // for multivariate Hensel lifting
00050 const int POLYFACT_MAX_PREDETERMINATION = 10000;
00051
00052 class poly;
00053
00054 class factorized_poly {
00055     /* Class for representing a factorized polynomial
00056      * The polynomial is given by: PRODUCT(factor[i] ^ power[i])
00057      */
00058 public:
00059     std::vector<poly> factor;
00060     std::vector<int> power;
00061
00062     void add_factor(const poly &f, int p=1);
00063     const std::string toString() const;
00064     friend std::ostream& operator<< (std::ostream &out, const poly &p);
00065 };
00066
00067 std::ostream& operator<< (std::ostream &out, const factorized_poly &a);
00068
00069 namespace polyfact {
00070
00071     // factorization routine
00072     const factorized_poly factorize (const poly &a);
00073
00074     // methods for squarefree factorization
00075     const factorized_poly squarefree_factors (const poly &a);
00076     const factorized_poly squarefree_factors_Yun (const poly &a);
00077     const factorized_poly squarefree_factors_modp (const poly &a);
00078
00079     // methods for choosing suitable reductions
00080     const std::vector<poly> factorize_squarefree (const poly &a, const std::vector<int> &x);
00081     WORD choose_prime (const poly &a, const std::vector<int> &x, WORD p=0);
00082     WORD choose_prime_power (const poly &a, WORD p);
00083     const std::vector<int> choose_ideal (const poly &a, int p, const factorized_poly &lc, const
std::vector<int> &x);
00084
00085     // methods for univariate factorization
00086     const std::vector<std::vector<WORD> > Berlekamp_Qmatrix (const poly &a);
00087     const std::vector<poly> Berlekamp_find_factors (const poly &a, const std::vector<std::vector<WORD>
> &Q);
00088     const std::vector<poly> combine_factors (const poly &a, const std::vector<poly> &f);
00089
00090     // methods for Hensel lifting
00091     const std::vector<poly> extended_gcd_Euclidean_lifted (const poly &a, const poly &b);
00092     const std::vector<poly> solve_Diophantine_univariate (const std::vector<poly> &a, const poly &b);
00093     const std::vector<poly> solve_Diophantine_multivariate (const std::vector<poly> &a, const poly &b,
const std::vector<int> &x, const std::vector<int> &c, int d);
00094     const std::vector<poly> lift_coefficients (const poly &a, const std::vector<poly> &f);
00095     const std::vector<poly> lift_variables (const poly &a, const std::vector<poly> &f, const
std::vector<int> &x, const std::vector<int> &c, const std::vector<poly> &lc);
00096     void predetermine (int dep, const std::vector<std::vector<int> > &state,
std::vector<std::vector<std::vector<int> > > &terms, std::vector<int> &term, int sumdeg=0);
00097
00098 }

```

4.108 polygcd.cc File Reference

```
#include "poly.h"
#include "polygcd.h"
#include <iostream>
#include <vector>
#include <cmath>
#include <map>
#include <algorithm>
```

Include dependency graph for polygcd.cc:

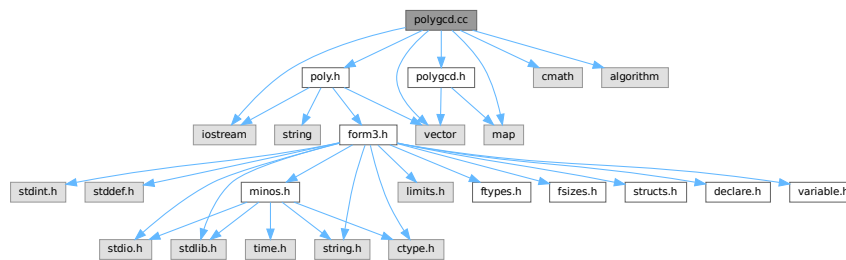

Data Structures

- struct [BracketInfo](#)

Functions

- bool [gcd_heuristic_possible](#) (const [poly](#) &a)
- const [poly](#) [gcd_linear_helper](#) (const [poly](#) &a, const [poly](#) &b)

4.108.1 Detailed Description

Contains the routines for calculating greatest commons divisors of multivariate polynomials

Definition in file [polygcd.cc](#).

4.108.2 Function Documentation

4.108.2.1 gcd_heuristic_possible()

```
bool gcd_heuristic_possible (
    const poly & a )
```

Heuristic greatest common divisor of multivariate polynomials

4.108.3 Description

Checks whether the heuristic seems possible by estimating

$\text{MAX_terms} \{ \text{coeff} \wedge \text{PROD}_{i=1.. \# \text{vars}} (\text{pow}_i + 1) \}$

and comparing this with `GCD_HEURISTIC_MAX_DIGITS`.

4.108.4 Notes

- For small polynomials, this consumes time and never triggers.

Definition at line 1142 of file `polygcd.cc`.

4.108.4.1 gcd_linear_helper()

```
const poly gcd_linear_helper (
    const poly & a,
    const poly & b )
```

Definition at line 1403 of file `polygcd.cc`.

4.109 polygcd.cc

[Go to the documentation of this file.](#)

```
00001
00006 /* # License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* # License : */
00032 /*
00033 # include :
00034 */
00035
00036 #include "poly.h"
00037 #include "polygcd.h"
00038
00039 #include <iostream>
00040 #include <vector>
00041 #include <cmath>
00042 #include <map>
00043 #include <algorithm>
```

```

00044
00045 //define DEBUG
00046 //define DEBUGALL
00047
00048 #ifdef DEBUG
00049 #include "mytime.h"
00050 #endif
00051
00052 using namespace std;
00053
00054 /*
00055     #] include :
00056     #[ ostream operator :
00057 */
00058
00059 #ifdef DEBUG
00060 // ostream operator for outputting vector<T>s for debugging purposes
00061 template<class T> ostream& operator<< (ostream &out, const vector<T> &x) {
00062     out<<"{";
00063     for (int i=0; i<(int)x.size(); i++) {
00064         if (i>0) out<<",";
00065         out<<x[i];
00066     }
00067     out<<"}";
00068     return out;
00069 }
00070 #endif
00071
00072 /*
00073     #] ostream operator :
00074     #[ integer_gcd :
00075 */
00076
00091 const poly polygcd::integer_gcd (const poly &a, const poly &b) {
00092
00093     #ifdef DEBUGALL
00094         cout << "*** [" << thetime() << "]" CALL: integer_gcd(" << a << "," << b << ")" << endl;
00095     #endif
00096
00097     POLY_GETIDENTITY(a);
00098
00099     if (a.is_zero()) return b;
00100     if (b.is_zero()) return a;
00101
00102     poly c(BHEAD 0, a.modp, a.modn);
00103     WORD nc;
00104
00105     GcdLong(BHEAD
00106             (UWORD *)&a[AN.poly_num_vars+2],a[a[0]-1],
00107             (UWORD *)&b[AN.poly_num_vars+2],b[b[0]-1],
00108             (UWORD *)&c[AN.poly_num_vars+2],&nc);
00109
00110     WORD x = 2 + AN.poly_num_vars + ABS(nc);
00111     c[1] = x; // term length
00112     c[0] = x+1; // total length
00113     c[x] = nc; // coefficient length
00114
00115     for (int i=0; i<AN.poly_num_vars; i++)
00116         c[2+i] = 0; // powers
00117
00118     #ifdef DEBUGALL
00119         cout << "*** [" << thetime() << "]" RES : integer_gcd(" << a << "," << b << ") = " << c << endl;
00120     #endif
00121
00122     return c;
00123 }
00124
00125 /*
00126     #] integer_gcd :
00127     #[ integer_content :
00128 */
00129
00143 const poly polygcd::integer_content (const poly &a) {
00144
00145     #ifdef DEBUGALL
00146         cout << "*** [" << thetime() << "]" CALL: integer_content(" << a << ")" << endl;
00147     #endif
00148
00149     POLY_GETIDENTITY(a);
00150
00151     if (a.modp>0) return a.integer_lcoeff();
00152
00153     poly c(BHEAD 0, 0, 1);
00154     WORD *d = (WORD *)NumberMalloc("polygcd::integer_content");
00155     WORD nc=0;
00156
00157     for (int i=0; i<AN.poly_num_vars; i++)

```

```

00158         c[2+i] = 0;
00159
00160     for (int i=1; i<a[0]; i+=a[i]) {
00161
00162         WCOPY(d,&c[2+AN.poly_num_vars],nc);
00163
00164         GcdLong(BHEAD (UWORD *)d, nc,
00165                 (UWORD *)&a[i+1+AN.poly_num_vars], a[i+a[i]-1],
00166                 (UWORD *)&c[2+AN.poly_num_vars], &nc);
00167
00168         WORD x = 2 + AN.poly_num_vars + ABS(nc);
00169         c[1] = x; // term length
00170         c[0] = x+1; // total length
00171         c[x] = nc; // coefficient length
00172     }
00173
00174     if (a.sign() != c.sign()) c *= poly(BHEAD -1);
00175
00176     NumberFree(d,"polygcd::integer_content");
00177
00178 #ifdef DEBUGALL
00179     cout << "*** [" << thetime() << "]" RES : integer_content(" << a << ") = " << c << endl;
00180 #endif
00181
00182     return c;
00183 }
00184
00185 /*
00186 #] integer_content :
00187 #[ content_univar :
00188 */
00189
00205 const poly polygcd::content_univar (const poly &a, int x) {
00206
00207 #ifdef DEBUG
00208     cout << "*** [" << thetime() << "]" CALL: content_univar(" << a << "," << string(1,'a'+x) << ") << endl;
00209 #endif
00210
00211     POLY_GETIDENTITY(a);
00212
00213     poly res(BHEAD 0, a.modp, a.modn);
00214
00215     for (int i=1; i<a[0];) {
00216         poly b(BHEAD 0, a.modp, a.modn);
00217         int deg = a[i+1+x];
00218
00219         for (; i<a[0] && a[i+1+x]==deg; i+=a[i]) {
00220             b.check_memory(b[0]+a[i]);
00221             b.termscopy(&a[i],b[0],a[i]);
00222             b[b[0]+1+x] = 0;
00223             b[0] += a[i];
00224         }
00225
00226         res = gcd(res, b);
00227
00228         if (res.is_integer()) {
00229             res = integer_content(a);
00230             break;
00231         }
00232     }
00233
00234     if (a.sign() != res.sign()) res *= poly(BHEAD -1);
00235
00236 #ifdef DEBUG
00237     cout << "*** [" << thetime() << "]" RES : content_univar(" << a << "," << string(1,'a'+x) << ") = " << res
00238     << endl;
00239 #endif
00240     return res;
00241 }
00242
00243 /*
00244 #] content_univar :
00245 #[ content_multivar :
00246 */
00247
00263 const poly polygcd::content_multivar (const poly &a, int x) {
00264
00265 #ifdef DEBUGALL
00266     cout << "*** [" << thetime() << "]" CALL: content_multivar(" << a << "," << string(1,'a'+x) << ") <<
00267     endl;
00268 #endif
00269
00270     POLY_GETIDENTITY(a);
00271
00272     poly res(BHEAD 0, a.modp, a.modn);
00273

```

```

00273     for (int i=1,j; i<a[0]; i=j) {
00274         poly b(BHEAD 0, a.modp, a.modn);
00275
00276         for (j=i; j<a[0]; j+=a[j]) {
00277             bool same_powers = true;
00278             for (int k=0; k<AN.poly_num_vars; k++)
00279                 if (k!=x && a[i+1+k]!=a[j+1+k]) {
00280                     same_powers = false;
00281                     break;
00282                 }
00283             if (!same_powers) break;
00284
00285             b.check_memory(b[0]+a[j]);
00286             b.termscopy(&a[j],b[0],a[j]);
00287             for (int k=0; k<AN.poly_num_vars; k++)
00288                 if (k!=x) b[b[0]+1+k]=0;
00289
00290             b[0] += a[j];
00291         }
00292
00293         res = gcd_Euclidean(res, b);
00294
00295         if (res.is_integer()) {
00296             res = poly(BHEAD a.sign(),a.modp,a.modn);
00297             break;
00298         }
00299     }
00300
00301 #ifdef DEBUGALL
00302     cout << "*** [" << thetime() << "] RES : content_multivar(" << a << ", " << string(1,'a'+x) << ") = " <<
00303     res << endl;
00304 #endif
00305     return res;
00306 }
00307
00308 /*
00309     #] content_multivar :
00310         #[ coefficient_list_gcd :
00311 */
00312
00325 const vector<WORD> polygcd::coefficient_list_gcd (const vector<WORD> &a, const vector<WORD> &b, WORD
p) {
00326
00327 #ifdef DEBUGALL
00328     cout << "*** [" << thetime() << "] CALL: coefficient_list_gcd("<<_a<<","<<_b<<","<<p<<")<<endl;
00329 #endif
00330
00331     vector<WORD> a(_a), b(_b);
00332
00333     while (b.size() != 0) {
00334         a = poly::coefficient_list_divmod(a,b,p,1);
00335         swap(a,b);
00336     }
00337
00338     while (a.back()==0) a.pop_back();
00339
00340     WORD inv;
00341     GetModInverses(a.back() + (a.back()<0?p:0), p, &inv, NULL);
00342
00343     for (int i=0; i<(int)a.size(); i++)
00344         a[i] = (LONG)inv*a[i] % p;
00345
00346 #ifdef DEBUGALL
00347     cout << "*** [" << thetime() << "] RES : coefficient_list_gcd("<<_a<<","<<_b<<","<<p<<") = "<<a<<endl;
00348 #endif
00349
00350     return a;
00351 }
00352
00353 /*
00354     #] coefficient_list_gcd :
00355     #[ gcd_Euclidean :
00356 */
00357
00374 const poly polygcd::gcd_Euclidean (const poly &a, const poly &b) {
00375
00376 #ifdef DEBUG
00377     cout << "*** [" << thetime() << "] CALL: gcd_Euclidean("<<a<<","<<b<<")<<endl;
00378 #endif
00379
00380     POLY_GETIDENTITY(a);
00381
00382     if (a.is_zero()) return b;
00383     if (b.is_zero()) return a;
00384     if (a.is_integer() || b.is_integer()) return integer_gcd(a,b);
00385

```



```

00386     poly res(BHEAD 0);
00387
00388     if (a.is_dense_univariate()>=-1 && b.is_dense_univariate()>=-1) {
00389         vector<WORD> coeff = coefficient_list_gcd(poly::to_coefficient_list(a),
00390 poly::to_coefficient_list(b), a.modp);
00391         res = poly::from_coefficient_list(BHEAD coeff, a.first_variable(), a.modp);
00392     }
00393     else {
00394         res = a;
00395         poly rem(b);
00396         while (!rem.is_zero())
00397             swap(res%=rem, rem);
00398         res /= res.integer_lcoeff();
00399     }
00400
00401 #ifdef DEBUG
00402     cout << "*** [" << thetime() << "] RES : gcd_Euclidean(" << a << ", " << b << ") = " << res << endl;
00403 #endif
00404
00405     return res;
00406 }
00407
00408 /*
00409 #] gcd_Euclidean :
00410 #[ chinese_remainder :
00411 */
00412
00426 const poly polygcd::chinese_remainder (const poly &a1, const poly &m1, const poly &a2, const poly &m2)
00427 {
00428 #ifdef DEBUGALL
00429     cout << "*** [" << thetime() << "] CALL: chinese_remainder(" << a1 << ", " << m1 << ", " << a2 << ", " << m2 <<
00430 ") " << endl;
00431 #endif
00432     POLY_GETIDENTITY(a1);
00433
00434     WORD nx,ny,nz;
00435     UWORD *x = (UWORD *)NumberMalloc("polygcd::chinese_remainder");
00436     UWORD *y = (UWORD *)NumberMalloc("polygcd::chinese_remainder");
00437     UWORD *z = (UWORD *)NumberMalloc("polygcd::chinese_remainder");
00438
00439     GetLongModInverses(BHEAD (UWORD *)&m1[2+AN.poly_num_vars], m1[m1[1]],
00440 (UWORD *)&m2[2+AN.poly_num_vars], m2[m2[1]],
00441 (UWORD *)x, &nx, NULL, NULL);
00442
00443     AddLong((UWORD *)&a2[2+AN.poly_num_vars], a2.is_zero() ? 0 : a2[a2[1]],
00444 (UWORD *)&a1[2+AN.poly_num_vars], a1.is_zero() ? 0 : -a1[a1[1]],
00445 y, &ny);
00446
00447     MulLong (x,nx,y,ny,z,&nz);
00448     MulLong (z,nz,(UWORD *)&m1[2+AN.poly_num_vars],m1[m1[1]],x,&nx);
00449
00450     AddLong (x,nx,(UWORD *)&a1[2+AN.poly_num_vars], a1.is_zero() ? 0 : a1[a1[1]],y,&ny);
00451
00452     MulLong ((UWORD *)&m1[2+AN.poly_num_vars], m1[m1[1]],
00453 (UWORD *)&m2[2+AN.poly_num_vars], m2[m2[1]],
00454 (UWORD *)z,&nz);
00455
00456     TakeNormalModulus (y,&ny,(UWORD *)z,nz,NOUNPACK);
00457
00458     poly res(BHEAD y,ny);
00459
00460     NumberFree(x,"polygcd::chinese_remainder");
00461     NumberFree(y,"polygcd::chinese_remainder");
00462     NumberFree(z,"polygcd::chinese_remainder");
00463
00464 #ifdef DEBUGALL
00465     cout << "*** [" << thetime() << "] RES : chinese_remainder(" << a1 << ", " << m1 << ", " << a2 << ", " << m2 <<
00466 ") = " << res << endl;
00467 #endif
00468     return res;
00469 }
00470
00471 /*
00472 #] chinese_remainder :
00473 #[ substitute :
00474 */
00475
00488 const poly polygcd::substitute(const poly &a, int x, int c) {
00489
00490     POLY_GETIDENTITY(a);
00491
00492     poly b(BHEAD 0);
00493

```

```

00494     if (a.is_zero()) {
00495         return b;
00496     }
00497
00498     bool zero=true;
00499     int bi=1;
00500
00501     // cache size is bounded by the degree in x, twice the number of terms of
00502     // the polynomial and a constant
00503     vector<WORD> cache(min(a.degree(x)+1,min(2*a.number_of_terms(),
00504 POLYGCD_RAISPOWMOD_CACHE_SIZE)), 0);
00505
00506     for (int ai=1; ai<=a[0]; ai+=a[ai]) {
00507         // last term or different power, then add term to b iff non-zero
00508         if (!zero) {
00509             bool add=false;
00510             if (ai==a[0])
00511                 add=true;
00512             else {
00513                 for (int i=0; i<AN.poly_num_vars; i++)
00514                     if (i!=x && a[ai+1+i]!=b[bi+1+i]) {
00515                         zero=true;
00516                         add=true;
00517                         break;
00518                     }
00519             }
00520
00521             if (add) {
00522                 if (b[bi+AN.poly_num_vars+1] < 0)
00523                     b[bi+AN.poly_num_vars+1] += a.modp;
00524                 bi+=b[bi];
00525             }
00526
00527             if (ai==a[0]) break;
00528         }
00529
00530         b.check_memory(bi);
00531
00532         // create new term in b
00533         if (zero) {
00534             b[bi] = 3+AN.poly_num_vars;
00535             for (int i=0; i<AN.poly_num_vars; i++)
00536                 b[bi+1+i] = a[ai+1+i];
00537             b[bi+1+x] = 0;
00538             b[bi+AN.poly_num_vars+1] = 0;
00539             b[bi+AN.poly_num_vars+2] = 1;
00540         }
00541
00542         // add term of a to the current term in b
00543         LONG coeff = a[ai+1+AN.poly_num_vars] * a[ai+2+AN.poly_num_vars];
00544         int pow = a[ai+1+x];
00545
00546         if (pow<(int)cache.size()) {
00547             if (cache[pow]==0)
00548                 cache[pow] = RaisPowMod(c, pow, a.modp);
00549             coeff = (coeff * cache[pow]) % a.modp;
00550         }
00551         else {
00552             coeff = (coeff * RaisPowMod(c, pow, a.modp)) % a.modp;
00553         }
00554
00555         b[bi+AN.poly_num_vars+1] = (coeff + b[bi+AN.poly_num_vars+1]) % a.modp;
00556         if (b[bi+AN.poly_num_vars+1] != 0) zero=false;
00557     }
00558
00559     b[0]=bi;
00560     b.setmod(a.modp);
00561
00562     return b;
00563 }
00564
00565 /*
00566     #] substitute :
00567     #[ sparse_interpolation helper functions :
00568 */
00569
00570 // Returns a list of size #terms(a) with entries PROD(ci^powi, i=2..n)
00571 const vector<int> polygcd::sparse_interpolation_get_mul_list (const poly &a, const vector<int> &x,
const vector<int> &c) {
00572     // cache size for variable x is bounded by the degree in x, twice
00573     // the number of terms of the polynomial and a constant
00574     vector<vector<WORD>> > cache(c.size());
00575     int max_cache_size = min(2*a.number_of_terms(),POLYGCD_RAISPOWMOD_CACHE_SIZE);
00576     for (int i=0; i<(int)c.size(); i++)
00577         cache[i] = vector<WORD>(min(a.degree(x[i+1])+1,max_cache_size), 0);
00578

```

```

00579     vector<int> res;
00580     for (int i=1; i<a[0]; i+=a[i]) {
00581         LONG coeff=1;
00582         for (int j=0; j<(int)c.size(); j++) {
00583             int pow = a[i+1+x[j+1]];
00584             if (pow<(int)cache[j].size()) {
00585                 if (cache[j][pow]==0)
00586                     cache[j][pow] = RaisPowMod(c[j], pow, a.modp);
00587                 coeff = (coeff * cache[j][pow]) % a.modp;
00588             }
00589             else {
00590                 coeff = (coeff * RaisPowMod(c[j], pow, a.modp)) % a.modp;
00591             }
00592         }
00593         res.push_back(coeff);
00594     }
00595     return res;
00596 }
00597
00598 // Multiplies the coefficients of a with the entries of mul
00599 void polygcd::sparse_interpolation_mul_poly (poly &a, const vector<int> &mul) {
00600     for (int i=1, j=0; i<a[0]; i+=a[i], j++)
00601         a[i+a[i]-2] = ((LONG)a[i+a[i]-2]*mul[j]) % a.modp;
00602 }
00603
00604 // Sets all coefficients to the range 0..modp-1 and the powers of x2...xn to 0
00605 const poly polygcd::sparse_interpolation_reduce_poly (const poly &a, const vector<int> &x) {
00606     poly res(a);
00607     for (int i=1; i<a[0]; i+=a[i]) {
00608         for (int j=1; j<(int)x.size(); j++)
00609             res[i+1+x[j]]=0;
00610         if (res[i+a[i]-1]==-1) {
00611             res[i+a[i]-1]=1;
00612             res[i+a[i]-2]=a.modp-res[i+a[i]-2];
00613         }
00614     }
00615     return res;
00616 }
00617
00618 // Collects entries with equal powers, so that the result is a proper polynomial
00619 const poly polygcd::sparse_interpolation_fix_poly (const poly &a, int x) {
00620
00621     POLY_GETIDENTITY(a);
00622     poly res(BHEAD 0, a.modp, 1);
00623
00624     int j=1;
00625     bool newterm=true;
00626
00627     for (int i=1; i<a[0]; i+=a[i]) {
00628         if (newterm)
00629             res.termscopy(&a[i], j, a[i]);
00630         else
00631             res[j+res[j]-2] = ((LONG)res[j+res[j]-2] + a[i+a[i]-2]) % a.modp;
00632
00633         newterm = i+a[i] == a[0] || res[j+1+x] != a[i+a[i]+1+x];
00634         if (newterm && res[j+res[j]-2]!=0) j += res[j];
00635     }
00636
00637     res[0]=j;
00638     return res;
00639 }
00640
00641 /*
00642     #] sparse_interpolation helper functions :
00643     #[ gcd_modular_sparse_interpolation :
00644 */
00645
00677 const poly polygcd::gcd_modular_sparse_interpolation (const poly &origa, const poly &origb, const
vector<int> &x, const poly &s) {
00678
00679 #ifdef DEBUG
00680     cout << "*** [" << thetime() << " ] CALL: gcd_modular_sparse_interpolation("
00681         << origa << ", " << origb << ", " << x << ", " << " << s << ")" << endl;
00682 #endif
00683
00684     POLY_GETIDENTITY(origa);
00685
00686     // strip multivariate content
00687     poly conta(content_multivar(origa, x.back()));
00688     poly contb(content_multivar(origb, x.back()));
00689     poly gcdconts(gcd_Euclidean(conta, contb));
00690     const poly& a = conta.is_one() ? origa : origa/conta;
00691     const poly& b = contb.is_one() ? origb : origb/contb;
00692
00693     // for non-monic cases, we need to normalize with the gcd of the lcoeffs of a poly in x[0]
00694     // or else the shape fitting does not work.
00695     // FIXME: the current implementation still rejects some valid shapes.

```

```

00696     poly lcgcd(BHEAD 1, a.modp);
00697     if (!s.lcoeff_univar(x[0]).is_integer()) {
00698         lcgcd = gcd_modular_dense_interpolation(a.lcoeff_univar(x[0]), b.lcoeff_univar(x[0]), x,
poly(BHEAD 0));
00699     }
00700
00701     // reduce polynomials
00702     poly ared(sparse_interpolation_reduce_poly(a,x));
00703     poly bred(sparse_interpolation_reduce_poly(b,x));
00704     poly sred(sparse_interpolation_reduce_poly(s,x));
00705     poly lred(sparse_interpolation_reduce_poly(lcgcd,x));
00706
00707     // set all coefficients to 1
00708     for (int i=1; i<sred[0]; i+=sred[i]) {
00709         sred[i+sred[i]-2] = sred[i+sred[i]-1] = 1;
00710     }
00711
00712     // generate random numbers and check there this set doesn't result
00713     // in a singular matrix
00714     vector<int> c(x.size()-1);
00715     vector<int> smul;
00716
00717     bool duplicates;
00718     do {
00719         for (int i=0; i<(int)c.size(); i++)
00720             c[i] = 1 + wranf(BHEAD0) % (a.modp-1);
00721         smul = sparse_interpolation_get_mul_list(s,x,c);
00722
00723         duplicates = false;
00724
00725         int fr=0,to=0;
00726         for (int i=1; i<s[0];) {
00727             int pow = s[i+1+x[0]];
00728             while (i<s[0] && s[i+1+x[0]]==pow) i+=s[i], to++;
00729             for (int j=fr; j<to; j++)
00730                 for (int k=fr; k<j; k++)
00731                     if (smul[j] == smul[k])
00732                         duplicates = true;
00733             fr=to;
00734         }
00735     } while (duplicates);
00736
00737     // get the lists to multiply the polynomials with every iteration
00738     vector<int> amul(sparse_interpolation_get_mul_list(a,x,c));
00739     vector<int> bmul(sparse_interpolation_get_mul_list(b,x,c));
00740     vector<int> lmul(sparse_interpolation_get_mul_list(lcgcd,x,c));
00741
00742     vector<vector<vector<LONG> > > M;
00743     vector<vector<LONG> > V;
00744
00745     int maxMsize=0;
00746
00747     // create (empty) matrices
00748     for (int i=1; i<s[0]; i+=s[i]) {
00749         if (i==1 || s[i+1+x[0]]!=s[i+1+x[0]-s[i]]) {
00750             M.push_back(vector<vector<LONG> >());
00751             V.push_back(vector<LONG>());
00752         }
00753         M.back().push_back(vector<LONG>());
00754         V.back().push_back(0);
00755         maxMsize = max(maxMsize, (int)M.back().size());
00756     }
00757
00758     // generate linear equations
00759     for (int numg=0; numg<maxMsize; numg++) {
00760         poly amodI(sparse_interpolation_fix_poly(ared,x[0]));
00761         poly bmodI(sparse_interpolation_fix_poly(bred,x[0]));
00762         poly lmodI(sparse_interpolation_fix_poly(lred,x[0]));
00763
00764         // A fix for non-monic gcds. This could be slow if lmodI has many terms,
00765         // since it overfits the gcd now. Another gcd has to be run to remove the
00766         // extra terms.
00767         poly gcd(lmodI * gcd_Euclidean(amodI,bmodI));
00768
00769         // if correct gcd
00770         if (!gcd.is_zero() && gcd[2+x[0]]==sred[2+x[0]]) {
00771             // for each power in the gcd, generate an equation if needed
00772             int gi=1, midx=0;
00773
00774             for (int si=1; si<s[0];) {
00775                 // if the term exists, set Vi=coeff, otherwise Vi remains 0
00776                 if (gi<gcd[0] && gcd[gi+1+x[0]]==sred[si+1+x[0]]) {
00777                     if (numg < (int)V[midx].size())
00778                         V[midx][numg] = gcd[gi+gcd[gi]-1]*gcd[gi+gcd[gi]-2];
00779                 }
00780                 gi+=s[si];
00781             }

```

```

00782         gi += gcd[gi];
00783     }
00784
00785     // add the coefficients of s to the matrix M
00786     for (int i=0; i<(int)M[midx].size(); i++) {
00787         if (numg < (int)M[midx].size())
00788             M[midx][numg].push_back(sred[si+1+AN.poly_num_vars]);
00789         si += s[si];
00790     }
00791
00792     midx++;
00793 }
00794 }
00795 else {
00796     // incorrect gcd
00797     if (!gcd.is_zero() && gcd[2+x[0]]<sred[2+x[0]])
00798         return poly(BHEAD 0);
00799     numg--;
00800 }
00801
00802 // multiply polynomials by the lists to obtain new ones
00803 sparse_interpolation_mul_poly(ared, amul);
00804 sparse_interpolation_mul_poly(bred, bmul);
00805 sparse_interpolation_mul_poly(sred, smul);
00806 sparse_interpolation_mul_poly(lred, lmul);
00807 }
00808
00809 // solve the linear equations
00810 for (int i=0; i<(int)M.size(); i++) {
00811     int n = M[i].size();
00812
00813     // Gaussian elimination
00814     for (int j=0; j<n; j++) {
00815         for (int k=0; k<j; k++) {
00816             LONG x = M[i][j][k];
00817             for (int l=k; l<n; l++)
00818                 M[i][j][l] = (M[i][j][l] - M[i][k][l]*x) % a.modp;
00819             V[i][j] = (V[i][j] - V[i][k]*x) % a.modp;
00820         }
00821
00822         // normalize row
00823         WORD x = M[i][j][j]; // WORD for GetModInverses
00824         GetModInverses(x + (x<0?a.modp:0), a.modp, &x, NULL);
00825         for (int k=0; k<n; k++)
00826             M[i][j][k] = (M[i][j][k]*x) % a.modp;
00827         V[i][j] = (V[i][j]*x) % a.modp;
00828     }
00829
00830     // solve
00831     for (int j=n-1; j>=0; j--)
00832         for (int k=j+1; k<n; k++)
00833             V[i][j] = (V[i][j] - M[i][j][k]*V[i][k]) % a.modp;
00834 }
00835
00836 // create coefficient list
00837 vector<LONG> coeff;
00838 for (int i=0; i<(int)V.size(); i++)
00839     for (int j=0; j<(int)V[i].size(); j++)
00840         coeff.push_back(V[i][j]);
00841
00842 // create resulting polynomial
00843 poly res(BHEAD 0);
00844 int ri=1, i=0;
00845 for (int si=1; si<s[0]; si+=s[si]) {
00846     res.check_memory(ri);
00847     res[ri] = 3 + AN.poly_num_vars; // term length
00848     for (int j=0; j<AN.poly_num_vars; j++)
00849         res[ri+1+j] = s[si+1+j]; // powers
00850     res[ri+1+AN.poly_num_vars] = ABS(coeff[i]); // coefficient
00851     res[ri+2+AN.poly_num_vars] = SGN(coeff[i]); // coefficient length
00852     i++;
00853     ri += res[ri];
00854 }
00855 res[0]=ri; // total length
00856 res.setmod(a.modp,1);
00857
00858 if (!poly::divides(res, lcgcd * a) || !poly::divides(res, lcgcd * b)) {
00859     return poly(BHEAD 0); // bad shape
00860 } else {
00861     // refine gcd
00862     if (!poly::divides(res, a))
00863         res = gcd_modular_dense_interpolation(res, a, x, poly(BHEAD 0));
00864     if (!poly::divides(res, b))
00865         res = gcd_modular_dense_interpolation(res, b, x, poly(BHEAD 0));
00866 }
00867
00868 #ifdef DEBUG

```

```

00869     cout << "*** [" << thetime() << "]" RES : gcd_modular_sparse_interpolation("
00870         << a << "," << b << "," << x << "," << "," << s <<") = " << res << endl;
00871 #endif
00872
00873     return gcdconts * res;
00874 }
00875
00876 /*
00877 #] gcd_modular_sparse_interpolation :
00878 #[ gcd_modular_dense_interpolation :
00879 */
00880
00899 const poly polygcd::gcd_modular_dense_interpolation (const poly &a, const poly &b, const vector<int>
&x, const poly &s) {
00900
00901 #ifdef DEBUG
00902     cout << "*** [" << thetime() << "]" CALL: gcd_modular_dense_interpolation(" << a << "," << b << "," << x <<
", " << s <<") << endl;
00903 #endif
00904
00905     POLY_GETIDENTITY(a);
00906
00907     // if univariate, then use Euclidean algorithm
00908     if (x.size() == 1) {
00909         return gcd_Euclidean(a,b);
00910     }
00911
00912     // if shape is known, use sparse interpolation
00913     if (!s.is_zero()) {
00914         poly res = gcd_modular_sparse_interpolation (a,b,x,s);
00915         if (!res.is_zero()) return res;
00916         // apparently the shape was not correct. continue.
00917     }
00918
00919     // divide out multivariate content in last variable
00920     int X = x.back();
00921
00922     poly conta(content_multivar(a,X));
00923     poly contb(content_multivar(b,X));
00924     poly gcdconts(gcd_Euclidean(conta,contb));
00925     const poly& ppa = conta.is_one() ? a : poly(a/conta);
00926     const poly& ppb = contb.is_one() ? b : poly(b/contb);
00927
00928     // gcd of leading coefficients
00929     poly lcoeffa(ppa.lcoeff_multivar(X));
00930     poly lcoeffb(ppb.lcoeff_multivar(X));
00931     poly gcdlcoeffs(gcd_Euclidean(lcoeffa,lcoeffb));
00932
00933     // calculate the degree bound for each variable
00934     int m = Min(ppa.degree(x[x.size() - 2]),ppb.degree(x[x.size() - 2]));
00935
00936     poly res(BHEAD 0);
00937     poly oldres(BHEAD 0);
00938     poly newshape(BHEAD 0);
00939     poly modpoly(BHEAD 1,a.modp);
00940
00941     while (true) {
00942         // generate random constants and substitute it
00943         int c = 1 + wranf(BHEAD0) % (a.modp-1);
00944         if (substitute(gcdlcoeffs,X,c).is_zero()) continue;
00945         if (substitute(modpoly,X,c).is_zero()) continue;
00946
00947         poly amodc(substitute(ppa,X,c));
00948         poly bmodc(substitute(ppb,X,c));
00949
00950         // calculate gcd recursively
00951         poly gcdmodc(gcd_modular_dense_interpolation(amodc,bmodc,vector<int>(x.begin(),x.end()-1),
newshape));
00952         int n = gcdmodc.degree(x[x.size() - 2]);
00953
00954         // normalize
00955         gcdmodc = (gcdmodc * substitute(gcdlcoeffs,X,c)) / gcdmodc.integer_lcoeff();
00956         poly simple(poly::simple_poly(BHEAD X,c,1,a.modp)); // (X-c) mod p
00957
00958         // if power is smaller, the old one was wrong
00959         if ((res.is_zero() && n == m) || n < m) {
00960             m = n;
00961             res = gcdmodc;
00962             newshape = gcdmodc; // set a new shape (interpolation does not change it)
00963             modpoly = simple;
00964         }
00965         else if (n == m) {
00966             oldres = res;
00967             // equal powers, so interpolate results
00968             poly coeff_poly(substitute(modpoly,X,c));
00969             WORD coeff_word = coeff_poly[2+AN.poly_num_vars] * coeff_poly[3+AN.poly_num_vars];
00970             if (coeff_word < 0) coeff_word += a.modp;

```

```

00971
00972         GetModInverses(coeff_word, a.modp, &coeff_word, NULL);
00973
00974         res.setmod(a.modp); // make sure the mod is set before substituting
00975         res += poly(BHEAD coeff_word, a.modp, 1) * modpoly * (gcdmodc - substitute(res,X,c));
00976         modpoly *= simple;
00977     }
00978
00979     // check whether this is the complete gcd
00980     if (!res.is_zero() && res == oldres) {
00981         poly nres = res / content_multivar(res, X);
00982         if (poly::divides(nres,ppa) && poly::divides(nres,ppb)) {
00983 #ifdef DEBUG
00984             cout << "*** [" << thetime() << "] RES : gcd_modular_dense_interpolation(" << a << ", " << b
00985             << ", "
00986                 << x << ", " << ", " << s << ") = " << gcdconts * nres << endl;
00987 #endif
00988             return gcdconts * nres;
00989         }
00990         // At this point, the gcd may be too large due to bad luck
00991         // TODO: create an efficient fail state that tries to find a smaller
00992         // polynomial without interpolating bad ones?
00993         newshape = poly(BHEAD 0); // reset the shape, important!
00994     }
00995 }
00996 }
00997
00998 /*
00999 #] gcd_modular_dense_interpolation : :
01000 #[ gcd_modular :
01001 */
01002
01019 const poly polygcd::gcd_modular (const poly &origa, const poly &origb, const vector<int> &x) {
01020
01021 #ifdef DEBUG
01022     cout << "*** [" << thetime() << "] CALL: gcd_modular(" << origa << ", " << origb << ", " << x << ")" << endl;
01023 #endif
01024
01025     POLY_GETIDENTITY(origa);
01026
01027     if (origa.is_zero()) return origa.modp==0 ? origb : origb / origb.integer_lcoeff();
01028     if (origb.is_zero()) return origa.modp==0 ? origa : origa / origa.integer_lcoeff();
01029     if (origa==origb) return origa.modp==0 ? origa : origa / origa.integer_lcoeff();
01030
01031     poly ac = integer_content(origa);
01032     poly bc = integer_content(origb);
01033     const poly& a = ac.is_one() ? origa : poly(origa/ac);
01034     const poly& b = bc.is_one() ? origb : poly(origb/bc);
01035     poly ic = integer_gcd(ac, bc);
01036     poly g = integer_gcd(a.integer_lcoeff(), b.integer_lcoeff());
01037
01038     int pnun=0;
01039
01040     poly d(BHEAD 0);
01041     poly m1(BHEAD 1);
01042     int mindeg=MAXPOSITIVE;
01043
01044     while (true) {
01045         // choose a prime and solve modulo the prime
01046         WORD p = NextPrime(BHEAD pnun++);
01047         if (poly(a.integer_lcoeff(),p).is_zero()) continue;
01048         if (poly(b.integer_lcoeff(),p).is_zero()) continue;
01049
01050         poly c(gcd_modular_dense_interpolation(poly(a,p),poly(b,p),x,poly(d,p)));
01051         c = (c * poly(g,p)) / c.integer_lcoeff(); // normalize so that lcoeff(c) = g mod p
01052
01053         if (c.is_zero()) {
01054             // unlucky choices somewhere, so start all over again
01055             d = poly(BHEAD 0);
01056             m1 = poly(BHEAD 1);
01057             mindeg = MAXPOSITIVE;
01058             continue;
01059         }
01060
01061         if (!(poly(a,p)%c).is_zero()) continue;
01062         if (!(poly(b,p)%c).is_zero()) continue;
01063
01064         int deg = c.degree(x[0]);
01065
01066         if (deg < mindeg) {
01067             // small degree, so the old one is wrong
01068             d=c;
01069             d.modp=a.modp;
01070             d.modn=a.modn;
01071             m1 = poly(BHEAD p);
01072             mindeg=deg;

```

```

01073     }
01074     else if (deg == mindeg) {
01075         // same degree, so use Chinese Remainder Algorithm
01076         poly newd(BHEAD 0);
01077
01078         for (int ci=1,di=1; ci<c[0]||di<d[0]; ) {
01079             int comp = ci==c[0] ? -1 : di==d[0] ? +1 : poly::monomial_compare(BHEAD
&c[ci],&d[di]);
01080             poly a1(BHEAD 0),a2(BHEAD 0);
01081
01082             newd.check_memory(newd[0]);
01083
01084             if (comp <= 0) {
01085                 newd.termscopy(&d[di],newd[0],1+AN.poly_num_vars);
01086                 a1 = poly(BHEAD (UWORD *)&d[di+1+AN.poly_num_vars],d[di+d[di]-1]);
01087                 di+=d[di];
01088             }
01089             if (comp >= 0) {
01090                 newd.termscopy(&c[ci],newd[0],1+AN.poly_num_vars);
01091                 a2 = poly(BHEAD (UWORD *)&c[ci+1+AN.poly_num_vars],c[ci+c[ci]-1]);
01092                 ci+=c[ci];
01093             }
01094
01095             poly e(chinese_remainder(a1,m1,a2,poly(BHEAD p)));
01096             newd.termscopy(&e[2+AN.poly_num_vars], newd[0]+1+AN.poly_num_vars, ABS(e[e[1]])+1);
01097             newd[newd[0]] = 2 + AN.poly_num_vars + ABS(e[e[1]]);
01098             newd[0] += newd[newd[0]];
01099         }
01100
01101         m1 *= poly(BHEAD p);
01102         d=newd;
01103     }
01104
01105     // divide out spurious integer content
01106     poly ppd(d / integer_content(d));
01107
01108     // check whether this is the complete gcd
01109     if (poly::divides(ppd,a) && poly::divides(ppd,b)) {
01110 #ifdef DEBUG
01111         cout << "*** [" << thetime() << "]" RES : gcd_modular(" << origa << "," << origb << "," << x << ")
= "
01112             << ic * ppd << endl;
01113 #endif
01114         return ic * ppd;
01115     }
01116 #ifdef DEBUG
01117     cout << "*** [" << thetime() << "]" Retrying modular_gcd with new prime" << endl;
01118 #endif
01119 }
01120 }
01121
01122 /*
01123 #] gcd_modular :
01124 #[ gcd_heuristic_possible :
01125 */
01126
01142 bool gcd_heuristic_possible (const poly &a) {
01143     POLY_GETIDENTITY(a);
01144
01145     double prod_deg = 1;
01146     for (int j=0; j<AN.poly_num_vars; j++)
01147         prod_deg *= a[2+j]+1;
01148
01149     double digits = ABS(a[1+a[1]-1]);
01150     double lead = a[1+1+AN.poly_num_vars];
01151
01152     return prod_deg*(digits-1+log(2*ABS(lead))/log(2.0)/(BITSINWORD/2)) <
POLYGCD_HEURISTIC_MAX_DIGITS;
01154 }
01155
01156 /*
01157 #] gcd_heuristic_possible :
01158 #[ gcd_heuristic :
01159 */
01160
01161
01188 const poly polygcd::gcd_heuristic (const poly &a, const poly &b, const vector<int> &x, int max_tries)
{
01189
01190 #ifdef DEBUG
01191     cout << "*** [" << thetime() << "]" CALL: gcd_heuristic("<a<","<b<","<x<")\n";
01192 #endif
01193
01194     if (a.is_integer()) return integer_gcd(a,integer_content(b));
01195     if (b.is_integer()) return integer_gcd(integer_content(a),b);
01196

```



```

01197     POLY_GETIDENTITY(a);
01198
01199     // Calculate xi = 2*min(max(coefficients a),max(coefficients b))+2
01200
01201     UWORD *pxi=NULL;
01202     WORD nxi=0;
01203
01204     for (int i=1; i<a[0]; i+=a[i]) {
01205         WORD na = ABS(a[i+a[i]-1]);
01206         if (BigLong((UWORD *)&a[i+a[i]-1-na], na, pxi, nxi) > 0) {
01207             pxi = (UWORD *)&a[i+a[i]-1-na];
01208             nxi = na;
01209         }
01210     }
01211
01212     for (int i=1; i<b[0]; i+=b[i]) {
01213         WORD nb = ABS(b[i+b[i]-1]);
01214         if (BigLong((UWORD *)&b[i+b[i]-1-nb], nb, pxi, nxi) > 0) {
01215             pxi = (UWORD *)&b[i+b[i]-1-nb];
01216             nxi = nb;
01217         }
01218     }
01219
01220     poly xi(BHEAD pxi,nxi);
01221
01222     // Addition of another random factor gives better performance
01223     xi = xi*poly(BHEAD 2) + poly(BHEAD 2 + wranf(BHEAD0)%POLY_GCD_HEURISTIC_MAX_ADD_RANDOM);
01224
01225     // If degree*digits(xi) is too large, throw exception
01226     if (max(a.degree(x[0]),b.degree(x[0])) * xi[xi[1]] >= Min(AM.MaxTal,
POLY_GCD_HEURISTIC_MAX_DIGITS)) {
01227 #ifdef DEBUG
01228     cout << "*** [" << thetime() << " ] RES : gcd_heuristic(" << a << ", " << b << ", " << xi << ") = overflow\n";
01229 #endif
01230     throw(gcd_heuristic_failed());
01231 }
01232
01233     for (int times=0; times<max_tries; times++) {
01234
01235         // Recursively calculate the gcd
01236
01237         poly gamma(gcd_heuristic(a % poly::simple_poly(BHEAD x[0],xi),
01238                             b % poly::simple_poly(BHEAD x[0],xi),
01239                             vector<int>(x.begin()+1,x.end()),1));
01240
01241         // If a gcd is found, reconstruct the powers of x
01242         if (!gamma.is_zero()) {
01243             // res is construct is reverse order. idx/len are for reversing
01244             // it in the correct order
01245             poly res(BHEAD 0), c(BHEAD 0);
01246             vector<int> idx, len;
01247
01248             for (int power=0; !gamma.is_zero(); power++) {
01249
01250                 // calculate c = gamma % xi (c and gamma are polynomials, xi is integer)
01251                 c = gamma;
01252                 c.coefficients_modulo((UWORD *)&xi[2+AN.poly_num_vars], xi[xi[0]-1], false);
01253
01254                 // Add the terms c * x^power to res
01255                 res.check_memory(res[0]+c[0]);
01256                 res.termscopy(&c[1],res[0],c[0]-1);
01257                 for (int i=1; i<c[0]; i+=c[i])
01258                     res[res[0]-1+i+1+x[0]] = power;
01259
01260                 // Store idx/len for reversing
01261                 if (!c.is_zero()) {
01262                     idx.push_back(res[0]);
01263                     len.push_back(c[0]-1);
01264                 }
01265
01266                 res[0] += c[0]-1;
01267
01268                 // Divide gamma by xi
01269                 gamma = (gamma - c) / xi;
01270             }
01271
01272             // Reverse the resulting polynomial
01273             poly rev(BHEAD 0);
01274             rev.check_memory(res[0]);
01275
01276             rev[0] = 1;
01277             for (int i=idx.size()-1; i>=0; i--) {
01278                 rev.termscopy(&res[idx[i]], rev[0], len[i]);
01279                 rev[0] += len[i];
01280             }
01281             res = rev;
01282

```

```

01283         poly ppres = res / integer_content(res);
01284
01285         if ((a%ppres).is_zero() && (b%ppres).is_zero()) {
01286 #ifdef DEBUG
01287             cout << "*** [" << thetime() << "] RES : gcd_heuristic(" << a << ", " << b << ", " << x << ") = " << res << "\n";
01288 #endif
01289             return res;
01290         }
01291     }
01292
01293     // Next xi by multiplying with the golden ratio to avoid correlated errors
01294     xi = xi * poly(BHEAD 28657) / poly(BHEAD 17711) + poly(BHEAD wranf(BHEAD0) %
POLYGCD_HEURISTIC_MAX_ADD_RANDOM);
01295 }
01296
01297 #ifdef DEBUG
01298     cout << "*** [" << thetime() << "] RES : gcd_heuristic(" << a << ", " << b << ", " << x << ") = failed\n";
01299 #endif
01300
01301     return poly(BHEAD 0);
01302 }
01303
01304 /*
01305 #] gcd_heuristic :
01306 #[ bracket :
01307 */
01308
01309 const map<vector<int>,poly> polygcd::full_bracket(const poly &a, const vector<int>& filter) {
01310     POLY_GETIDENTITY(a);
01311
01312     map<vector<int>,poly> bracket;
01313     for (int ai=1; ai<a[0]; ai+=a[ai]) {
01314         vector<int> varpattern(AN.poly_num_vars);
01315         for (int i=0; i<AN.poly_num_vars; i++)
01316             if (filter[i] == 1 && a[ai + i + 1] > 0)
01317                 varpattern[i] = a[ai + i + 1];
01318
01319         // create monomial
01320         poly mon(BHEAD 1);
01321         mon.setmod(a.modp);
01322         mon[0] = a[ai] + 1;
01323         for (int i=0; i<a[ai]; i++)
01324             if (i > 0 && i <= AN.poly_num_vars && varpattern[i - 1])
01325                 mon[1+i] = 0;
01326             else
01327                 mon[1+i] = a[ai+i];
01328
01329         map<vector<int>,poly>::iterator i = bracket.find(varpattern);
01330         if (i == bracket.end()) {
01331             bracket.insert(std::make_pair(varpattern, mon));
01332         } else {
01333             i->second += mon;
01334         }
01335     }
01336
01337     return bracket;
01338 }
01339
01340 const poly polygcd::bracket(const poly &a, const vector<int>& pattern, const vector<int>& filter) {
01341     POLY_GETIDENTITY(a);
01342
01343     poly bracket(BHEAD 0);
01344     for (int ai=1; ai<a[0]; ai+=a[ai]) {
01345         bool ispat = true;
01346         for (int i=0; i<AN.poly_num_vars; i++)
01347             if (filter[i] == 1 && pattern[i] != a[ai + i + 1]) {
01348                 ispat = false;
01349                 break;
01350             }
01351
01352         if (ispat) {
01353             poly mon(BHEAD 1);
01354             mon.setmod(a.modp);
01355             mon[0] = a[ai] + 1;
01356             for (int i=0; i<a[ai]; i++)
01357                 if (i > 0 && i <= AN.poly_num_vars && pattern[i - 1])
01358                     mon[1+i] = 0;
01359                 else
01360                     mon[1+i] = a[ai+i];
01361             bracket += mon;
01362         }
01363     }
01364
01365     return bracket;
01366 }
01367
01368 const map<vector<int>,int> polygcd::bracket_count(const poly &a, const vector<int>& filter) {

```

```

01369     POLY_GETIDENTITY(a);
01370
01371     map<vector<int>,int> bracket;
01372     for (int ai=1; ai<a[0]; ai+=a[ai]) {
01373         vector<int> varpattern(AN.poly_num_vars);
01374         for (int i=0; i<AN.poly_num_vars; i++)
01375             if (filter[i] == 1 && a[ai + i + 1] > 0)
01376                 varpattern[i] = a[ai + i + 1];
01377
01378         map<vector<int>,int>::iterator i = bracket.find(varpattern);
01379         if (i == bracket.end()) {
01380             bracket.insert(std::make_pair(varpattern, 0));
01381         } else {
01382             i->second++;
01383         }
01384     }
01385
01386     return bracket;
01387 }
01388
01389 struct BracketInfo {
01390     std::vector<int> pattern;
01391     int num_terms, dummy = 0;
01392     const poly* p;
01393
01394     BracketInfo(const std::vector<int>& pattern, int num_terms, const poly* p) : pattern(pattern),
01395     num_terms(num_terms), p(p) {}
01396
01397     bool operator<(const BracketInfo& rhs) const { return num_terms > rhs.num_terms; } // biggest
01398     // should be first!
01399 };
01400
01401 /*
01402 #] bracket :
01403 #[ gcd_linear:
01404 */
01405
01406 const poly gcd_linear_helper (const poly &a, const poly &b) {
01407     POLY_GETIDENTITY(a);
01408
01409     for (int i = 0; i < AN.poly_num_vars; i++)
01410         if (a.degree(i) == 1) {
01411             vector<int> filter(AN.poly_num_vars);
01412             filter[i] = 1;
01413
01414             // bracket the linear variable
01415             map<vector<int>,poly> ba = polygcd::full_bracket(a, filter);
01416
01417             poly subgcd(BHEAD 1);
01418             if (ba.size() == 2)
01419                 subgcd = polygcd::gcd_linear(ba.begin()->second, (++ba.begin()->second);
01420             else
01421                 subgcd = ba.begin()->second;
01422
01423             poly linfac = a / subgcd;
01424             if (poly::divides(linfac,b))
01425                 return linfac * polygcd::gcd_linear(subgcd, b / linfac);
01426
01427             return polygcd::gcd_linear(subgcd, b);
01428         }
01429
01430     return poly(BHEAD 0);
01431 }
01432
01433 const poly polygcd::gcd_linear (const poly &a, const poly &b) {
01434     #ifdef DEBUG
01435         cout << "*** [" << thetime() << " ] CALL: gcd_linear(\"a<<\", \"b<<\")\n";
01436     #endif
01437
01438     POLY_GETIDENTITY(a);
01439
01440     if (a.is_zero()) return a.modp==0 ? b : b / b.integer_lcoeff();
01441     if (b.is_zero()) return a.modp==0 ? a : a / a.integer_lcoeff();
01442     if (a==b) return a.modp==0 ? a : a / a.integer_lcoeff();
01443
01444     if (a.is_integer() || b.is_integer()) {
01445         if (a.modp > 0) return poly(BHEAD 1,a.modp,a.modn);
01446         return poly(integer_gcd(integer_content(a),integer_content(b)),0,1);
01447     }
01448
01449     poly h = gcd_linear_helper(a, b);
01450     if (!h.is_zero()) return h;
01451
01452     h = gcd_linear_helper(b, a);
01453     if (!h.is_zero()) return h;
01454
01455     vector<int> xa = a.all_variables();
01456     vector<int> xb = b.all_variables();

```

```

01458
01459     vector<int> used(AN.poly_num_vars,0);
01460     for (int i=0; i<(int)xa.size(); i++) used[xa[i]]++;
01461     for (int i=0; i<(int)xb.size(); i++) used[xb[i]]++;
01462     vector<int> x;
01463     for (int i=0; i<AN.poly_num_vars; i++)
01464         if (used[i]) x.push_back(i);
01465
01466     return gcd_modular(a,b,x);
01467 }
01468
01469 /*
01470  #] gcd_linear:
01471  #[ gcd :
01472  */
01473
01494 const poly polygcd::gcd (const poly &a, const poly &b) {
01495
01496 #ifdef DEBUG
01497     cout << "*** [" << thetime() << " ] CALL: gcd(" << a << ", " << b << ") \n";
01498 #endif
01499
01500     POLY_GETIDENTITY(a);
01501
01502     if (a.is_zero()) return a.modp==0 ? b : b / b.integer_lcoeff();
01503     if (b.is_zero()) return a.modp==0 ? a : a / a.integer_lcoeff();
01504     if (a==b) return a.modp==0 ? a : a / a.integer_lcoeff();
01505
01506     if (a.is_integer() || b.is_integer()) {
01507         if (a.modp > 0) return poly(BHEAD 1,a.modp,a.modn);
01508         return poly(integer_gcd(integer_content(a),integer_content(b)),0,1);
01509     }
01510
01511     // Generate a list of variables of a and b
01512     vector<int> xa = a.all_variables();
01513     vector<int> xb = b.all_variables();
01514
01515     vector<int> used(AN.poly_num_vars,0);
01516     for (int i=0; i<(int)xa.size(); i++) used[xa[i]]++;
01517     for (int i=0; i<(int)xb.size(); i++) used[xb[i]]++;
01518     vector<int> x;
01519     for (int i=0; i<AN.poly_num_vars; i++)
01520         if (used[i]) x.push_back(i);
01521
01522     if (a.is_monomial() || b.is_monomial()) {
01523
01524         poly res(BHEAD 1,a.modp,a.modn);
01525         if (a.modp == 0) res = integer_gcd(integer_content(a),integer_content(b));
01526
01527         for (int i=0; i<(int)x.size(); i++)
01528             res[2+x[i]] = 1<<(BITSINWORD-2);
01529
01530         for (int i=1; i<a[0]; i+=a[i])
01531             for (int j=0; j<(int)x.size(); j++)
01532                 res[2+x[j]] = MiN(res[2+x[j]], a[i+1+x[j]]);
01533
01534         for (int i=1; i<b[0]; i+=b[i])
01535             for (int j=0; j<(int)x.size(); j++)
01536                 res[2+x[j]] = MiN(res[2+x[j]], b[i+1+x[j]]);
01537
01538         return res;
01539     }
01540
01541     // Calculate the contents, their gcd and the primitive parts
01542     poly conta(x.size()==1 ? integer_content(a) : content_univar(a,x[0]));
01543     poly contb(x.size()==1 ? integer_content(b) : content_univar(b,x[0]));
01544     poly gcdconts(x.size()==1 ? integer_gcd(conta,contb) : gcd(conta,contb));
01545     const poly& ppa = conta.is_one() ? a : poly(a/conta);
01546     const poly& ppb = contb.is_one() ? b : poly(b/contb);
01547
01548     if (ppa == ppb)
01549         return ppa * gcdconts;
01550
01551     poly res(BHEAD 0);
01552
01553 #ifdef POLY_GCD_USE_HEURISTIC
01554     // Try the heuristic gcd algorithm
01555     if (a.modp==0 && gcd_heuristic_possible(a) && gcd_heuristic_possible(b)) {
01556         try {
01557             res = gcd_heuristic(ppa,ppb,x);
01558             if (!res.is_zero()) res /= integer_content(res);
01559         }
01560         catch (gcd_heuristic_failed) {}
01561     }
01562 #endif
01563
01564     // If gcd==0, the heuristic algorithm failed, so we do more extensive checks.

```

```

01565 // First, we filter out variables that appear in only one of the expressions.
01566 if (res.is_zero()) {
01567     bool unusedVars = false;
01568     for (unsigned int i = 0; i < used.size(); i++) {
01569         if (used[i] == 1) {
01570             unusedVars = true;
01571             break;
01572         }
01573     }
01574
01575     // if there are no unused variables, go to the linear routine directly
01576     if (!unusedVars) {
01577         res = gcd_linear(ppa,ppb);
01578 #ifdef DEBUG
01579         cout << "New GCD attempt (unused vars): " << res << endl;
01580 #endif
01581     }
01582
01583     // if res is not the gcd, it is 0 or larger than the gcd.
01584     // we bracket the expression in all the variables that appear only in one expr.
01585     // and we refine the gcd.
01586     bool diva = !res.is_zero() && poly::divides(res,ppa);
01587     bool divb = !res.is_zero() && poly::divides(res,ppb);
01588     if (!diva || !divb) {
01589         vector<BracketInfo> bracketinfo;
01590
01591         if (!diva) {
01592             map<vector<int>,int> ba = bracket_count(ppa, used);
01593             for (map<vector<int>,int>::iterator it = ba.begin(); it != ba.end(); it++)
01594                 bracketinfo.push_back(BracketInfo(it->first, it->second, &ppa));
01595         }
01596
01597         if (!divb) {
01598             map<vector<int>,int> bb = bracket_count(ppb, used);
01599             for (map<vector<int>,int>::iterator it = bb.begin(); it != bb.end(); it++)
01600                 bracketinfo.push_back(BracketInfo(it->first, it->second, &ppb));
01601         }
01602
01603         // sort so that the smallest bracket will be last
01604         sort(bracketinfo.begin(), bracketinfo.end());
01605
01606         if (res.is_zero()) {
01607             res = bracket(*bracketinfo.back().p, bracketinfo.back().pattern, used);
01608             bracketinfo.pop_back();
01609         }
01610
01611         while (bracketinfo.size() > 0) {
01612             poly subpoly(bracket(*bracketinfo.back().p, bracketinfo.back().pattern, used));
01613             if (!poly::divides(res,subpoly)) {
01614                 // if we can filter out more variables, call gcd again
01615                 if (res.all_variables() != subpoly.all_variables())
01616                     res = gcd(subpoly,res);
01617                 else
01618                     res = gcd_linear(subpoly,res);
01619             }
01620
01621             bracketinfo.pop_back();
01622         }
01623     }
01624
01625     if (res.is_zero() || !poly::divides(res,ppa) || !poly::divides(res,ppb)) {
01626         MesPrint("Bad gcd found.");
01627         std::cout << "Bad gcd:" << res << " for " << ppa << " " << ppb << std::endl;
01628         Terminate(1);
01629     }
01630 }
01631
01632 res *= gcdconts * poly(BHEAD res.sign());
01633
01634 #ifdef DEBUG
01635     cout << "*** [" << thetime() << "] RES : gcd(" << a << ", " << b << ") = " << res << endl;
01636 #endif
01637
01638 return res;
01639 }
01640
01641 /*
01642 #] gcd :
01643 */

```

4.110 polygcd.h

```
00001 #pragma once
```

```


00002 /* #[ License : */
00003 /*
00004 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00005 *   When using this file you are requested to refer to the publication
00006 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00007 *   This is considered a matter of courtesy as the development was paid
00008 *   for by FOM the Dutch physics granting agency and we would like to
00009 *   be able to track its scientific use to convince FOM of its value
00010 *   for the community.
00011 *
00012 *   This file is part of FORM.
00013 *
00014 *   FORM is free software: you can redistribute it and/or modify it under the
00015 *   terms of the GNU General Public License as published by the Free Software
00016 *   Foundation, either version 3 of the License, or (at your option) any later
00017 *   version.
00018 *
00019 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00020 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00021 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00022 *   details.
00023 *
00024 *   You should have received a copy of the GNU General Public License along
00025 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00026 */
00027 /* #[ License : */
00028
00029 #include <vector>
00030 #include <map>
00031
00032 class poly; // polynomial class
00033 class gcd_heuristic_failed {}; // class for throwing exceptions
00034
00035 // whether or not to use the heuristic before Zippel's algorithm
00036 #define POLYGCD_USE_HEURISTIC
00037
00038 // maximum number of words in a coefficient for gcd_heuristic to continue
00039 const int POLYGCD_HEURISTIC_MAX_DIGITS = 1000;
00040
00041 // maximum number of retries after the heuristic has failed
00042 const int POLYGCD_HEURISTIC_MAX_TRIES = 10;
00043
00044 // a fudge factor, which improves efficiency
00045 const int POLYGCD_HEURISTIC_MAX_ADD_RANDOM = 10;
00046
00047 // maximum cached power in substitute_last and sparse_interpolation_get_mul_list
00048 const int POLYGCD_RAISPOWMOD_CACHE_SIZE = 1000;
00049
00050 namespace polygcd {
00051
00052     // functions to call the gcd routines
00053     const poly integer_gcd (const poly &a, const poly &b);
00054     const poly integer_content (const poly &a);
00055
00056     const poly gcd (const poly &a, const poly &b);
00057     const poly content_univar (const poly &a, int x);
00058     const poly content_multivar (const poly &a, int x);
00059
00060     const std::vector<WORD> coefficient_list_gcd (const std::vector<WORD> &a, const std::vector<WORD>
&b, WORD p);
00061
00062     // internal functions
00063     const poly gcd_heuristic (const poly &a, const poly &b, const std::vector<int> &x, int
max_tries=POLYGCD_HEURISTIC_MAX_TRIES);
00064     const poly gcd_Euclidean (const poly &a, const poly &b);
00065     const poly gcd_modular (const poly &a, const poly &b, const std::vector<int> &x);
00066     const poly gcd_modular_dense_interpolation (const poly &a, const poly &b, const std::vector<int>
&x, const poly &s);
00067     const poly gcd_modular_sparse_interpolation (const poly &a, const poly &b, const std::vector<int>
&x, const poly &s);
00068
00069     const std::vector<int> sparse_interpolation_get_mul_list (const poly &a, const std::vector<int>
&x, const std::vector<int> &c);
00070     void sparse_interpolation_mul_poly (poly &a, const std::vector<int> &m);
00071     const poly sparse_interpolation_reduce_poly (const poly &a, const std::vector<int> &x);
00072     const poly sparse_interpolation_fix_poly (const poly &a, int x);
00073
00074     const poly chinese_remainder (const poly &a1, const poly &m1, const poly &a2, const poly &m2);
00075     const poly substitute(const poly &a, int x, int c);
00076     const std::map<std::vector<int>,poly> full_bracket(const poly &a, const std::vector<int>& filter);
00077     const poly bracket(const poly &a, const std::vector<int>& pattern, const std::vector<int>&
filter);
00078     const std::map<std::vector<int>,int> bracket_count(const poly &a, const std::vector<int>& filter);
00079     const poly gcd_linear (const poly &a, const poly &b);
00080 }

```

4.111 polywrap.cc File Reference

```
#include "poly.h"
#include "polygcd.h"
#include "polyfact.h"
#include <iostream>
#include <vector>
#include <map>
#include <climits>
#include <cassert>
```

Include dependency graph for polywrap.cc:

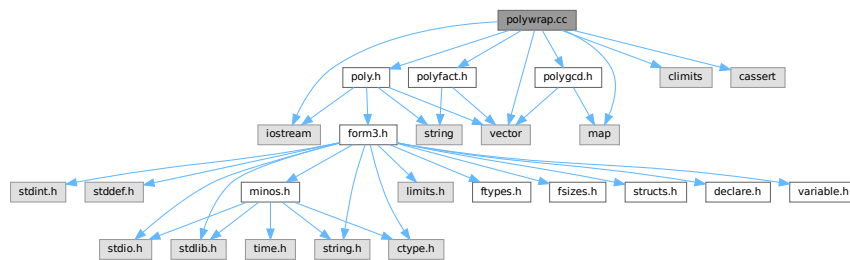

Functions

- WORD [poly_determine_modulus](#) (PHEAD bool multi_error, bool is_fun_arg, string message)
- WORD * [poly_gcd](#) (PHEAD WORD *a, WORD *b, WORD fit)
- WORD * [poly_divmod](#) (PHEAD WORD *a, WORD *b, int divmod, WORD fit)
- WORD * [poly_div](#) (PHEAD WORD *a, WORD *b, WORD fit)
- WORD * [poly_rem](#) (PHEAD WORD *a, WORD *b, WORD fit)
- void [poly_ratfun_read](#) (WORD *a, [poly](#) &num, [poly](#) &den)
- void [poly_sort](#) (PHEAD WORD *a)
- WORD * [poly_ratfun_add](#) (PHEAD WORD *t1, WORD *t2)
- int [poly_ratfun_normalize](#) (PHEAD WORD *term)
- void [poly_fix_minus_signs](#) ([factorized_poly](#) &a)
- WORD * [poly_factorize](#) (PHEAD WORD *argin, WORD *argout, bool with_arghead, bool is_fun_arg)
- int [poly_factorize_argument](#) (PHEAD WORD *argin, WORD *argout)
- WORD * [poly_factorize_dollar](#) (PHEAD WORD *argin)
- int [poly_factorize_expression](#) ([EXPRESSIONS](#) expr)
- int [poly_unfactorize_expression](#) ([EXPRESSIONS](#) expr)
- WORD * [poly_inverse](#) (PHEAD WORD *arga, WORD *argb)
- WORD * [poly_mul](#) (PHEAD WORD *a, WORD *b)
- void [poly_free_poly_vars](#) (PHEAD const char *text)

Variables

- const int [POLYWRAP_DENOMPOWER_INCREASE_FACTOR](#) = 2

4.111.1 Detailed Description

Contains methods to call the polynomial methods (written in C++) from the rest of Form (written in C). These include polynomial gcd computation, factorization and polyratfuns.

Definition in file [polywrap.cc](#).

4.111.2 Function Documentation

4.111.2.1 `poly_determine_modulus()`

```
WORD poly_determine_modulus (
    PHEAD bool multi_error,
    bool is_fun_arg,
    string message )
```

Modulus for polynomial algebra

4.111.3 Description

This method determines whether polynomial algebra is done with a modulus or not. This depends on AC.ncmod. If only_funargs is set it also depends on (AC.modmode & ALSOFUNARGS).

The program terminates if the feature is not implemented. Polynomial algebra modulo $M > \text{WORDSIZE}$ is not implemented. If multi_error is set, multivariate algebra mod M is not implemented.

4.111.4 Notes

- If AC.ncmod>0 and only_funargs=true and AC.modmode&ALSOFUNARGS=false, AN.ncmod is set to zero, for otherwise RaisPow calculates mod M .

Definition at line 79 of file [polywrap.cc](#).

Referenced by [poly_factorize\(\)](#), [poly_factorize_expression\(\)](#), [poly_gcd\(\)](#), [poly_ratfun_add\(\)](#), and [poly_ratfun_normalize\(\)](#).

4.111.4.1 `poly_gcd()`

```
WORD * poly_gcd (
    PHEAD WORD * a,
    WORD * b,
    WORD fit )
```

Polynomial gcd

4.111.5 Description

This method calculates the greatest common divisor of two polynomials, given by two zero-terminated Form-style term lists.


4.111.6 Notes

- The result is written at newly allocated memory
- Called from [ratio.c](#)
- Calls `polygcd::gcd`

Definition at line [124](#) of file [polywrap.cc](#).

References [poly_determine_modulus\(\)](#).

Here is the call graph for this function:



4.111.6.1 poly_divmod()

```
WORD * poly_divmod (  
    PHEAD WORD * a,  
    WORD * b,  
    int divmod,  
    WORD fit )
```

Definition at line [203](#) of file [polywrap.cc](#).

4.111.6.2 poly_div()

```
WORD * poly_div (  
    PHEAD WORD * a,  
    WORD * b,  
    WORD fit )
```

Definition at line [435](#) of file [polywrap.cc](#).

4.111.6.3 poly_rem()

```
WORD * poly_rem (  
    PHEAD WORD * a,  
    WORD * b,  
    WORD fit )
```

Definition at line [463](#) of file [polywrap.cc](#).

4.111.6.4 poly_ratfun_read()

```
void poly_ratfun_read (
    WORD * a,
    poly & num,
    poly & den )
```

Read a PolyRatFun

4.111.7 Description

This method reads a polyratfun starting at the pointer a. The resulting numerator and denominator are written in num and den. If MUSTCLEANPRF, the result is normalized.

4.111.8 Notes

- Calls polygcd::gcd

Definition at line 496 of file [polywrap.cc](#).

Referenced by [poly_ratfun_add\(\)](#), and [poly_ratfun_normalize\(\)](#).

4.111.8.1 poly_sort()

```
void poly_sort (
    PHEAD WORD * a )
```

Sort the polynomial terms

4.111.9 Description

Sorts the terms of a polynomial in Form [poly\(rat\)](#)fun order, i.e. lexicographical order with highest degree first.

4.111.10 Notes


- Uses Form sort routines with custom compare

Definition at line 590 of file [polywrap.cc](#).

References [Compare1\(\)](#), [CompareSymbols\(\)](#), [EndSort\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [StoreTerm\(\)](#), and [SymbolNormalize\(\)](#).

Referenced by [poly_ratfun_add\(\)](#), and [poly_ratfun_normalize\(\)](#).

Here is the call graph for this function:

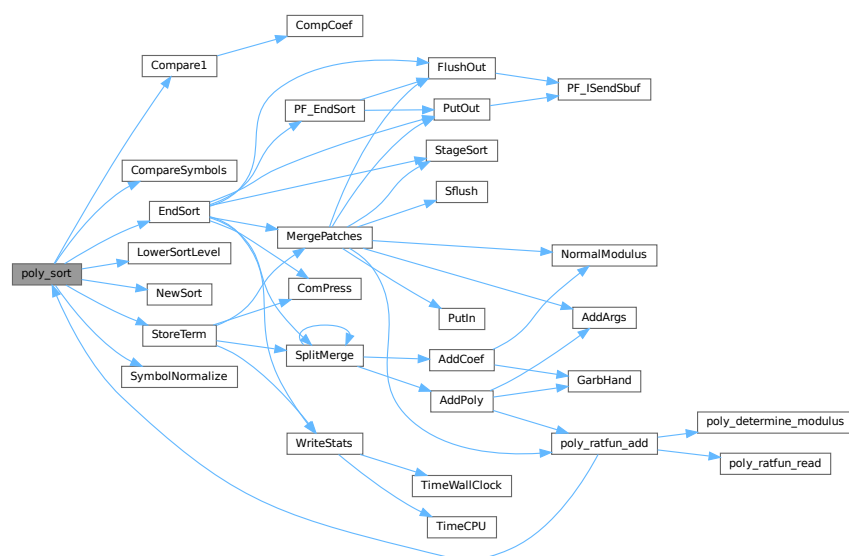

4.111.10.1 poly_ratfun_add()

```
WORD * poly_ratfun_add (
    PHEAD WORD * t1,
    WORD * t2 )
```

Addition of PolyRatFuns

4.111.11 Description

This method gets two pointers to polyratfuns with up to two arguments each and calculates the sum.

4.111.14 Notes


- The result overwrites the original term
- Called from [proces.c](#)
- Calls `poly::operators` and `polygcd::gcd`

Definition at line 769 of file [polywrap.cc](#).

References [poly_determine_modulus\(\)](#), [poly_ratfun_read\(\)](#), and [poly_sort\(\)](#).

Referenced by [PolyFunMul\(\)](#), and [PrepPoly\(\)](#).

Here is the call graph for this function:

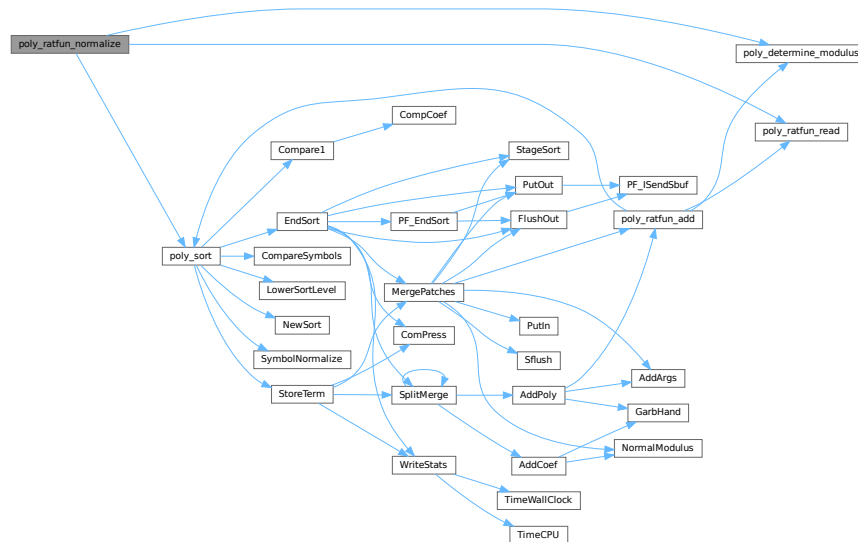

4.111.14.1 poly_fix_minus_signs()

```
void poly_fix_minus_signs (
    factorized_poly & a )
```

Definition at line 921 of file [polywrap.cc](#).

4.111.14.2 poly_factorize()

```
WORD * poly_factorize (
    PHEAD WORD * argin,
    WORD * argout,
    bool with_arghead,
    bool is_fun_arg )
```

Factorization of function arguments / dollars

4.111.15 Description

This method factorizes a Form style argument or zero-terminated term list.

4.111.16 Notes

- Called from `poly_factorize_{argument,dollar}`
- Calls `polyfact::factorize`

Definition at line 986 of file `polywrap.cc`.

References `poly_determine_modulus()`.

Referenced by `poly_factorize_argument()`, and `poly_factorize_dollar()`.

Here is the call graph for this function:



4.111.16.1 `poly_factorize_argument()`

```
int poly_factorize_argument (  
    PHEAD WORD * argin,  
    WORD * argout )
```

Factorization of function arguments

4.111.17 Description

This method factorizes the Form-style argument `argin`.


4.111.18 Notes

- The result is written at argout
- Called from [argument.c](#)
- Calls `poly_factorize`

Definition at line 1112 of file [polywrap.cc](#).

References [poly_factorize\(\)](#).

Here is the call graph for this function:



4.111.18.1 poly_factorize_dollar()

```
WORD * poly_factorize_dollar (
    PHEAD WORD * argin )
```

Factorization of dollar variables

4.111.19 Description

This method factorizes a dollar variable.


4.111.20 Notes

- The result is written at newly allocated memory.
- Called from [dollar.c](#)
- Calls `poly_factorize`

Definition at line 1146 of file [polywrap.cc](#).

References [poly_factorize\(\)](#).

Here is the call graph for this function:



4.111.20.1 poly_factorize_expression()

```
int poly_factorize_expression (
    EXPRESSIONS expr )
```

Factorization of expressions

4.111.21 Description

This method factorizes an expression.

4.111.22 Notes


- The result overwrites the input expression
- Called from [proces.c](#)
- Calls `polyfact::factorize`

Definition at line 1178 of file [polywrap.cc](#).

References [EndSort\(\)](#), [Generator\(\)](#), [FiLe::handle](#), [LocalConvertToPoly\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), and [poly_determine_modulus\(\)](#).

Referenced by [PF_Processor\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:

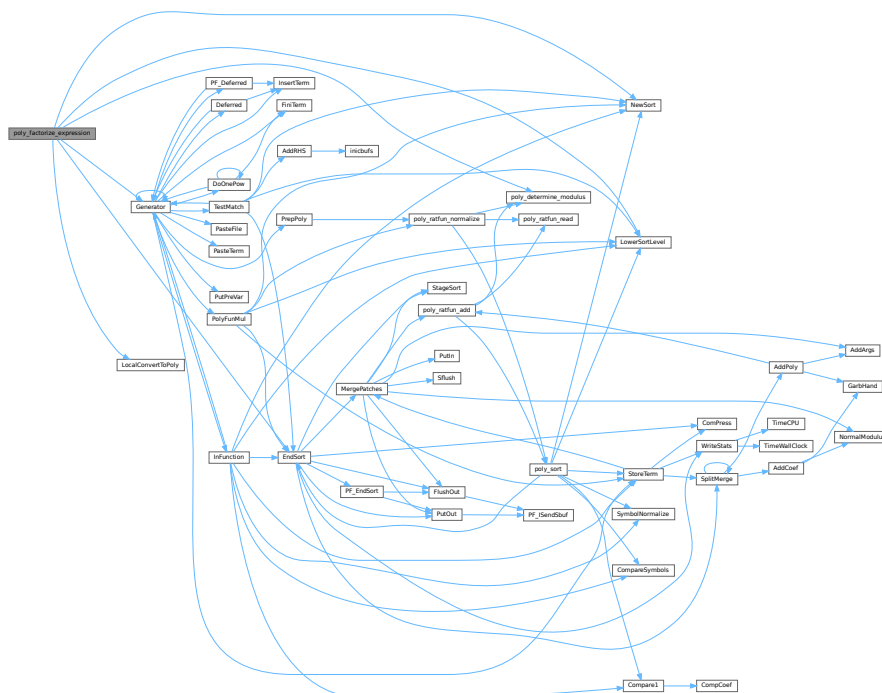

4.111.22.1 poly_unfactorize_expression()

```
int poly_unfactorize_expression (
    EXPRESSIONS expr )
```

Unfactorization of expressions

4.111.23 Description

This method expands a factorized expression.

4.111.24 Notes


- The result overwrites the input expression
- Called from [proces.c](#)

Definition at line 1535 of file [polywrap.cc](#).

References [EndSort\(\)](#), [Generator\(\)](#), [FiLe::handle](#), [LowerSortLevel\(\)](#), and [NewSort\(\)](#).

Referenced by [PF_Processor\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:

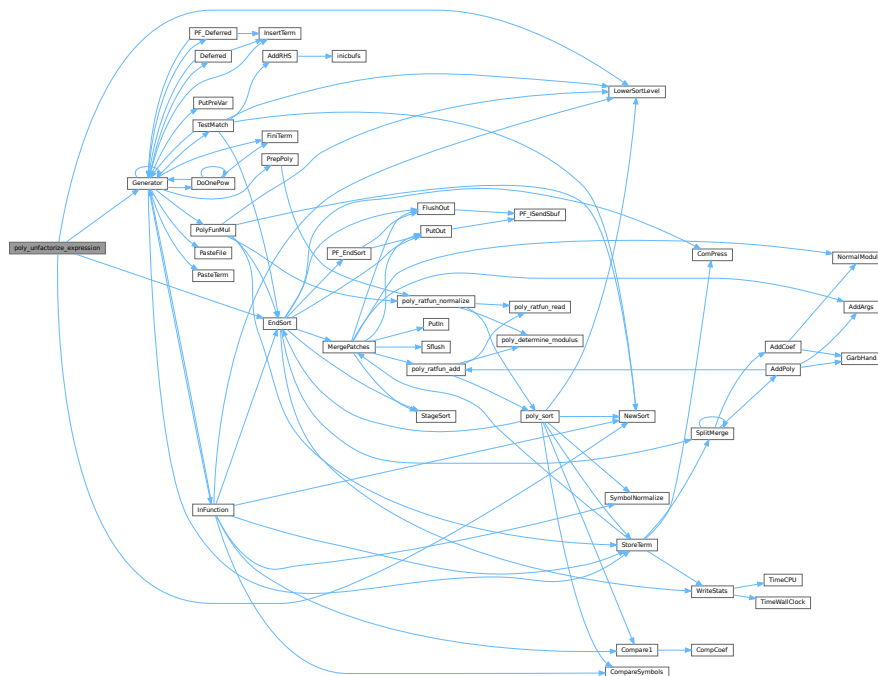

4.111.24.1 poly_inverse()

```
WORD * poly_inverse (
    PHEAD WORD * arga,
    WORD * argb )
```

Definition at line 1743 of file [polywrap.cc](#).

4.111.24.2 poly_mul()

```
WORD * poly_mul (
    PHEAD WORD * a,
    WORD * b )
```

Definition at line 1948 of file [polywrap.cc](#).

4.111.24.3 poly_free_poly_vars()

```
void poly_free_poly_vars (
    PHEAD const char * text )
```

Definition at line 2014 of file [polywrap.cc](#).

4.111.25 Variable Documentation

4.111.25.1 POLYWRAP_DENOMPOWER_INCREASE_FACTOR

```
const int POLYWRAP_DENOMPOWER_INCREASE_FACTOR = 2
```

Definition at line 52 of file [polywrap.cc](#).

4.112 polywrap.cc

[Go to the documentation of this file.](#)

```
00001
00008 /* # [ License : */
00009 /*
00010 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 * When using this file you are requested to refer to the publication
00012 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 * This is considered a matter of courtesy as the development was paid
00014 * for by FOM the Dutch physics granting agency and we would like to
00015 * be able to track its scientific use to convince FOM of its value
00016 * for the community.
00017 *
00018 * This file is part of FORM.
00019 *
00020 * FORM is free software: you can redistribute it and/or modify it under the
00021 * terms of the GNU General Public License as published by the Free Software
00022 * Foundation, either version 3 of the License, or (at your option) any later
00023 * version.
00024 *
00025 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 * details.
00029 *
```

```

00030 *   You should have received a copy of the GNU General Public License along
00031 *   with FORM.  If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* #] License : */
00034
00035 #include "poly.h"
00036 #include "polygcd.h"
00037 #include "polyfact.h"
00038
00039 #include <iostream>
00040 #include <vector>
00041 #include <map>
00042 #include <climits>
00043 #include <cassert>
00044
00045 // #define DEBUG
00046
00047 #ifdef DEBUG
00048 #include "mytime.h"
00049 #endif
00050
00051 // denompower is increased by this factor when divmod_heap fails
00052 const int POLYWRAP_DENOMPOWER_INCREASE_FACTOR = 2;
00053
00054 using namespace std;
00055
00056 /*
00057  #[ poly_determine_modulus :
00058 */
00059
00079 WORD poly_determine_modulus (PHEAD bool multi_error, bool is_fun_arg, string message) {
00080
00081     if (AC.ncmod==0) return 0;
00082
00083     if (!is_fun_arg || (AC.modmode & ALSOFUNARGS)) {
00084
00085         if (ABS(AC.ncmod)>1) {
00086             MLOCK(ErrorMessageLock);
00087             MesPrint ((char*)"ERROR: %s with modulus > WORDSIZE not implemented",message.c_str());
00088             MUNLOCK(ErrorMessageLock);
00089             Terminate(-1);
00090         }
00091
00092         if (multi_error && AN.poly_num_vars>1) {
00093             MLOCK(ErrorMessageLock);
00094             MesPrint ((char*)"ERROR: multivariate %s with modulus not implemented",message.c_str());
00095             MUNLOCK(ErrorMessageLock);
00096             Terminate(-1);
00097         }
00098
00099         return *AC.cmod;
00100     }
00101
00102     AN.ncmod = 0;
00103     return 0;
00104 }
00105
00106 /*
00107  #] poly_determine_modulus :
00108  #[ poly_gcd :
00109 */
00110
00124 WORD *poly_gcd(PHEAD WORD *a, WORD *b, WORD fit) {
00125
00126 #ifdef WITHFLINT
00127     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
00128         WORD *ret = flint_gcd(BHEAD a, b, fit);
00129         return ret;
00130     }
00131 #endif
00132
00133 #ifdef DEBUG
00134     cout << "*** [" << thetime() << "]" << " CALL : poly_gcd" << endl;
00135 #endif
00136
00137 //
00138 //MesPrint("Calling poly_gcd with:");
00139 //{
00140 // WORD *at = a;
00141 // MesPrint("      a:");
00142 // while ( *at ) {
00143 //     MesPrint("      %a",*at,at);
00144 //     at += *at;
00145 // }
00146 // MesPrint("      b:");
00147 // at = b;
00148 // while ( *at ) {

```

```

00149 //      MesPrint("    %a",*at,at);
00150 //      at += *at;
00151 //  }
00152 //}
00153
00154 // Extract variables
00155 vector<WORD *> e;
00156 e.reserve(2);
00157 e.push_back(a);
00158 e.push_back(b);
00159 poly::get_variables(BHEAD e, false, true);
00160
00161 // Check for modulus calculus
00162 WORD modp=poly_determine_modulus(BHEAD true, true, "polynomial GCD");
00163
00164 // Convert to polynomials
00165 poly pa(poly::argument_to_poly(BHEAD a, false, true), modp, 1);
00166 poly pb(poly::argument_to_poly(BHEAD b, false, true), modp, 1);
00167
00168 // Calculate gcd
00169 poly gcd(polygcd::gcd(pa,pb));
00170
00171 // Allocate new memory and convert to Form notation
00172 int newsize = (gcd.size_of_form_notation()+1);
00173 WORD *res;
00174 if ( fit ) {
00175     if ( newsize*sizeof(WORD) >= (size_t)(AM.MaxTer) ) {
00176         MLOCK(ErrorMessageLock);
00177         MesPrint("poly_gcd: Term too complex (%d words). Maybe increasing MaxTermSize (%d words)
can help",
00178                 newsize, AM.MaxTer/sizeof(WORD));
00179         MUNLOCK(ErrorMessageLock);
00180         Terminate(-1);
00181     }
00182     res = TermMalloc("poly_gcd");
00183 }
00184 else {
00185     res = (WORD *)Malloca1(newsize*sizeof(WORD), "poly_gcd");
00186 }
00187 poly::poly_to_argument(gcd, res, false);
00188
00189 poly_free_poly_vars(BHEAD "AN.poly_vars_gcd");
00190
00191 // reset modulo calculation
00192 AN.ncmod = AC.ncmod;
00193 return res;
00194 }
00195
00196 /*
00197 #] poly_gcd :
00198 #[ poly_divmod :
00199
00200 if fit == 1 the answer must fit inside a term.
00201 */
00202
00203 WORD *poly_divmod(PHEAD WORD *a, WORD *b, int divmod, WORD fit) {
00204
00205 #ifdef DEBUG
00206     cout << "*** [" << thetime() << "]" CALL : poly_divmod" << endl;
00207 #endif
00208
00209 // check for modulus calculus
00210 WORD modp=poly_determine_modulus(BHEAD false, true, "polynomial division");
00211
00212 // get variables
00213 vector<WORD *> e;
00214 e.reserve(2);
00215 e.push_back(a);
00216 e.push_back(b);
00217 poly::get_variables(BHEAD e, false, false);
00218
00219 // add extra variables to keep track of denominators
00220 const int DENOMSYMBOL = MAXPOSITIVE;
00221
00222 // WORD *new_poly_vars = (WORD *)Malloca1((AN.poly_num_vars+1)*sizeof(WORD), "AN.poly_vars");
00223 // WCOPY(new_poly_vars, AN.poly_vars, AN.poly_num_vars);
00224 // new_poly_vars[AN.poly_num_vars] = DENOMSYMBOL;
00225 // if (AN.poly_num_vars > 0)
00226 //     M_free(AN.poly_vars, "AN.poly_vars");
00227 // AN.poly_num_vars++;
00228 // AN.poly_vars = new_poly_vars;
00229 // AN.poly_vars[AN.poly_num_vars++] = DENOMSYMBOL;
00230
00231 // convert to polynomials
00232 poly dena(BHEAD 0);
00233 poly denb(BHEAD 0);
00234 poly pa(poly::argument_to_poly(BHEAD a, false, true, &dena), modp, 1);

```

```

00235     poly pb(poly::argument_to_poly(BHEAD b, false, true, &denb), modp, 1);
00236
00237     // remove contents
00238     poly numres(polygcd::integer_content(pa));
00239     poly denres(polygcd::integer_content(pb));
00240     pa /= numres;
00241     pb /= denres;
00242
00243     if (divmod==0) {
00244         numres *= denb;
00245         denres *= dena;
00246     }
00247     else {
00248         denres = dena;
00249     }
00250
00251     poly gcdres(polygcd::integer_gcd(numres,denres));
00252     numres /= gcdres;
00253     denres /= gcdres;
00254
00255     // determine lcoeff(b)
00256     poly lcoeffb(pb.integer_lcoeff());
00257
00258     poly pres(BHEAD 0);
00259
00260     if (!lcoeffb.is_one()) {
00261
00262         if (AN.poly_num_vars > 2) {
00263             // the original polynomial is multivariate (one dummy variable has
00264             // been added), so it is not trivial to determine which power of
00265             // lcoeff(b) can be in the answer
00266
00267             int denompower = 0, prevdenompower = 0;
00268             poly pq(BHEAD 0);
00269             poly pr(BHEAD 0);
00270
00271             // try denompower = 0, if this fails increase denompower until division succeeds
00272             bool div_fail = true;
00273             do
00274             {
00275                 if(denompower < prevdenompower)
00276                 {
00277                     // denompower increased beyond INT_MAX
00278                     MLOCK(ErrorMessageLock);
00279                     MesPrint ((char*)"ERROR: pseudo-division failed in poly_divmod (denompower >
INT_MAX)");
00280                     MUNLOCK(ErrorMessageLock);
00281                     Terminate(1);
00282                 }
00283
00284                 if(denompower != 0)
00285                 {
00286                     // multiply a by lcoeffb^(denompower-prevdenompower)
00287                     WORD n = lcoeffb[lcoeffb[1]];
00288                     RaisPow(BHEAD (UWORD *)&lcoeffb[2+AN.poly_num_vars], &n,
denompower-prevdenompower);
00289                     lcoeffb[1] = 2 + AN.poly_num_vars + ABS(n);
00290                     lcoeffb[0] = 1 + lcoeffb[1];
00291                     lcoeffb[lcoeffb[1]] = n;
00292
00293                     pa *= lcoeffb;
00294                     denres *= lcoeffb;
00295                 }
00296
00297                 // try division
00298                 poly ppow(BHEAD 0);
00299                 poly::divmod_heap(pa,pb,pq,pr,false,true,div_fail); // sets div_fail
00300
00301                 // increase denompower for next iteration
00302                 prevdenompower = denompower;
00303                 denompower = (denompower==0 ? 1 : denompower*POLYWRAP_DENOMPPOWER_INCREASE_FACTOR+1 );
// generates 2^n-1 when POLYWRAP_DENOMPPOWER_INCREASE_FACTOR = 2
00304             }
00305             while(div_fail);
00306
00307             pres = (divmod==0 ? pq : pr);
00308
00309         }
00310         else {
00311             // one variable, so the power is the difference of the degrees
00312
00313             int denompower = MaX(0, pa.degree(0) - pb.degree(0) + 1);
00314
00315             // multiply a by that power
00316             WORD n = lcoeffb[lcoeffb[1]];
00317             RaisPow(BHEAD (UWORD *)&lcoeffb[2+AN.poly_num_vars], &n, denompower);
00318             lcoeffb[1] = 2 + AN.poly_num_vars + ABS(n);

```

```

00319         lcoeffb[0] = 1 + lcoeffb[1];
00320         lcoeffb[lcoeffb[1]] = n;
00321
00322         pa *= lcoeffb;
00323         denres *= lcoeffb;
00324
00325         pres = (divmod==0 ? pa/pb : pa%pb);
00326
00327     }
00328 }
00329 }
00330 else {
00331
00332     pres = (divmod==0 ? pa/pb : pa%pb);
00333
00334 }
00335
00336 // convert to Form notation
00337 // NOTE: this part can be rewritten with poly::size_of_form_notation_with_den()
00338 // and poly::poly_to_argument_with_den().
00339 WORD *res;
00340
00341 // special case: a=0
00342 if (pres[0]==1) {
00343     if ( fit ) {
00344         res = TermMalloc("poly_divmod");
00345     }
00346     else {
00347         res = (WORD *)Malloca(sizeof(WORD), "poly_divmod");
00348     }
00349     res[0] = 0;
00350 }
00351 else {
00352     pres *= numres;
00353
00354     WORD nden;
00355     UWORD *den = (UWORD *)NumberMalloc("poly_divmod");
00356
00357     // allocate the memory; note that this overestimates the size,
00358     // since the estimated denominators are too large
00359     int ressize = pres.size_of_form_notation() + pres.number_of_terms()*2*ABS(denres[denres[1]]) +
1;
00360
00361     if ( fit ) {
00362         if ( ressize*sizeof(WORD) > (size_t)(AM.MaxTer) ) {
00363             MLOCK(ErrorMessageLock);
00364             MesPrint("poly_divmod: Term too complex (%d words). Maybe increasing MaxTermSize (%d
words) can help",
00365                     ressize, AM.MaxTer/sizeof(WORD));
00366             MUNLOCK(ErrorMessageLock);
00367             Terminate(-1);
00368         }
00369         res = TermMalloc("poly_divmod");
00370     }
00371     else {
00372         res = (WORD *)Malloca(ressize*sizeof(WORD), "poly_divmod");
00373     }
00374     int L=0;
00375
00376     for (int i=1; i!=pres[0]; i+=pres[i]) {
00377
00378         res[L]=1; // length
00379         bool first = true;
00380
00381         for (int j=0; j<AN.poly_num_vars; j++)
00382             if (pres[i+1+j] > 0) {
00383                 if (first) {
00384                     first = false;
00385                     res[L+1] = 1; // symbols
00386                     res[L+2] = 2; // length
00387                 }
00388                 res[L+1+res[L+2]++] = AN.poly_vars[j]; // symbol
00389                 res[L+1+res[L+2]++] = pres[i+1+j]; // power
00390             }
00391
00392         if (!first) res[L] += res[L+2]; // fix length
00393
00394         // numerator
00395         WORD nnum = pres[i+pres[i]-1];
00396         WCOPY(&res[L+res[L]], &pres[i+pres[i]-1-ABS(nnum)], ABS(nnum));
00397
00398         // calculate denominator
00399         nden = denres[denres[1]];
00400         WCOPY(den, &denres[2+AN.poly_num_vars], ABS(nden));
00401
00402         if (nden!=1 || den[0]!=1)
00403             Simplify(BHEAD (UWORD *)&res[L+res[L]], &nnum, den, &nden); // gcd(num,den)

```

```

00404         Pack((UWORD *)&res[L+res[L]], &nnum, den, nden);           // format
00405         res[L] += 2*ABS(nnum)+1;                                     // fix length
00406         res[L+res[L]-1] = SGN(nnum)*(2*ABS(nnum)+1);               // length of coefficient
00407         L += res[L];                                               // fix length
00408     }
00409
00410     res[L] = 0;
00411
00412     NumberFree(den, "poly_divmod");
00413 }
00414
00415 // clean up
00416 poly_free_poly_vars(BHEAD "AN.poly_vars_divmod");
00417
00418 // reset modulo calculation
00419 AN.ncmod = AC.ncmod;
00420
00421 return res;
00422 }
00423
00424 /*
00425 #] poly_divmod :
00426 #[ poly_div :
00427
00428 Routine divides the expression in arg1 by the expression in arg2.
00429 We did not take out special cases.
00430 The arguments are zero terminated sequences of term(s).
00431 The action is to divide arg1 by arg2: [arg1/arg2].
00432 The answer should be a buffer (allocated by Malloc1) with a zero
00433 terminated sequence of terms (or just zero).
00434 */
00435 WORD *poly_div(PHEAD WORD *a, WORD *b, WORD fit) {
00436
00437 #ifdef WITHFLINT
00438     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
00439         WORD *ret = flint_div(BHEAD a, b, fit);
00440         return ret;
00441     }
00442 #endif
00443
00444 #ifdef DEBUG
00445     cout << "*** [" << thetime() << "]" CALL : poly_div" << endl;
00446 #endif
00447
00448     return poly_divmod(BHEAD a, b, 0, fit);
00449 }
00450
00451 /*
00452 #] poly_div :
00453 #[ poly_rem :
00454
00455 Routine divides the expression in arg1 by the expression in arg2
00456 and takes the remainder.
00457 We did not take out special cases.
00458 The arguments are zero terminated sequences of term(s).
00459 The action is to divide arg1 by arg2 and take the remainder: [arg1%arg2].
00460 The answer should be a buffer (allocated by Malloc1) with a zero
00461 terminated sequence of terms (or just zero).
00462 */
00463 WORD *poly_rem(PHEAD WORD *a, WORD *b, WORD fit) {
00464
00465 #ifdef WITHFLINT
00466     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
00467         WORD *ret = flint_rem(BHEAD a, b, fit);
00468         return ret;
00469     }
00470 #endif
00471
00472 #ifdef DEBUG
00473     cout << "*** [" << thetime() << "]" CALL : poly_rem" << endl;
00474 #endif
00475
00476     return poly_divmod(BHEAD a, b, 1, fit);
00477 }
00478
00479 /*
00480 #] poly_rem :
00481 #[ poly_ratfun_read :
00482 */
00483
00496 void poly_ratfun_read (WORD *a, poly &nnum, poly &den) {
00497
00498 #ifdef DEBUG
00499     cout << "*** [" << thetime() << "]" CALL : poly_ratfun_read" << endl;
00500 #endif
00501
00502     POLY_GETIDENTITY(nnum);

```

```

00503
00504     int modp = num.modp;
00505
00506     WORD *astop = a+a[1];
00507
00508     bool clean = (a[2] & MUSTCLEANPRF) == 0;
00509
00510     a += FUNHEAD;
00511     if (a >= astop) {
00512         MLOCK(ErrorMessageLock);
00513         MesPrint ((char*)"ERROR: PolyRatFun cannot have zero arguments");
00514         MUNLOCK(ErrorMessageLock);
00515         Terminate(-1);
00516     }
00517
00518     poly den_num(BHEAD 1), den_den(BHEAD 1);
00519
00520     num = poly::argument_to_poly(BHEAD a, true, !clean, &den_num);
00521     num.setmod(modp,1);
00522     NEXTARG(a);
00523
00524     if (a < astop) {
00525         den = poly::argument_to_poly(BHEAD a, true, !clean, &den_den);
00526         den.setmod(modp,1);
00527         NEXTARG(a);
00528     }
00529     else {
00530         den = poly(BHEAD 1, modp, 1);
00531     }
00532
00533     if (a < astop) {
00534         MLOCK(ErrorMessageLock);
00535         MesPrint ((char*)"ERROR: PolyRatFun cannot have more than two arguments");
00536         MUNLOCK(ErrorMessageLock);
00537         Terminate(-1);
00538     }
00539
00540     // JD: At this point, num and den are certainly sorted into the correct order by
00541     // poly::argument_to_poly, but we can't rely on the clean flag to know if there
00542     // are any negative powers. Check for them, and set clean = false if there are any.
00543     vector<WORD> minpower(AN.poly_num_vars, MAXPOSITIVE);
00544
00545     for (int i=1; i<num[0]; i+=num[i]) {
00546         for (int j=0; j<AN.poly_num_vars; j++) {
00547             minpower[j] = Min(minpower[j], num[i+1+j]);
00548         }
00549     }
00550     for (int i=1; i<den[0]; i+=den[i]) {
00551         for (int j=0; j<AN.poly_num_vars; j++) {
00552             minpower[j] = Min(minpower[j], den[i+1+j]);
00553             if ( minpower[j] < 0 ) clean = false;
00554         }
00555     }
00556
00557     if (!clean) {
00558         for (int i=1; i<num[0]; i+=num[i])
00559             for (int j=0; j<AN.poly_num_vars; j++)
00560                 num[i+1+j] -= minpower[j];
00561         for (int i=1; i<den[0]; i+=den[i])
00562             for (int j=0; j<AN.poly_num_vars; j++)
00563                 den[i+1+j] -= minpower[j];
00564
00565         num *= den_den;
00566         den *= den_num;
00567
00568         poly gcd = polygcd::gcd(num,den);
00569         num /= gcd;
00570         den /= gcd;
00571     }
00572 }
00573
00574 /*
00575 #] poly_ratfun_read :
00576 #[ poly_sort :
00577 */
00578
00590 void poly_sort(PHEAD WORD *a) {
00591
00592 #ifdef DEBUG
00593     cout << "*** [" << thetime() << "]" CALL : poly_sort" << endl;
00594 #endif
00595     if (NewSort(BHEAD0)) { Terminate(-1); }
00596     AR.CompareRoutine = (COMPAREDUMMY)(&CompareSymbols);
00597
00598     for (int i=ARGHEAD; i<a[0]; i+=a[i]) {
00599         if (SymbolNormalize(a+i)<0 || StoreTerm(BHEAD a+i)) {
00600             AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);

```



```

00601         LowerSortLevel();
00602         Terminate(-1);
00603     }
00604 }
00605
00606 if (EndSort(BHEAD a+ARGHEAD,1) < 0) {
00607     AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
00608     Terminate(-1);
00609 }
00610
00611 AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
00612 a[1] = 0; // set dirty flag to zero
00613 }
00614
00615 /*
00616 #] poly_sort :
00617 #[ poly_ratfun_add :
00618 */
00619
00633 WORD *poly_ratfun_add (PHEAD WORD *t1, WORD *t2) {
00634
00635 #ifdef WITHFLINT
00636     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
00637         WORD *ret = flint_ratfun_add(BHEAD t1, t2);
00638         return ret;
00639     }
00640 #endif
00641
00642     if ( AR.PolyFunExp == 1 ) return PolyRatFunSpecial(BHEAD t1, t2);
00643
00644 #ifdef DEBUG
00645     cout << "*** [" << thetime() << "]" CALL : poly_ratfun_add" << endl;
00646 #endif
00647
00648     WORD *oldworkpointer = AT.WorkPointer;
00649
00650     // Extract variables
00651     vector<WORD *> e;
00652     e.reserve(4);
00653
00654     for (WORD *t=t1+FUNHEAD; t<t1+t1[1];) {
00655         e.push_back(t);
00656         NEXTARG(t);
00657     }
00658     for (WORD *t=t2+FUNHEAD; t<t2+t2[1];) {
00659         e.push_back(t);
00660         NEXTARG(t);
00661     }
00662
00663     assert(e.size() == 4);
00664
00665     poly::get_variables(BHEAD e, true, true);
00666
00667     // Check for modulus calculus
00668     WORD modp=poly_determine_modulus(BHEAD true, true, "PolyRatFun");
00669
00670     // Find numerators / denominators
00671     poly num1(BHEAD 0,modp,1), den1(BHEAD 0,modp,1), num2(BHEAD 0,modp,1), den2(BHEAD 0,modp,1);
00672
00673     poly_ratfun_read(t1, num1, den1);
00674     poly_ratfun_read(t2, num2, den2);
00675
00676     poly num(BHEAD 0),den(BHEAD 0),gcd(BHEAD 0);
00677
00678     // Calculate result
00679     if (den1 != den2) {
00680         gcd = polygcd::gcd(den1,den2);
00681 #ifdef OLDADDITION
00682         num = num1*(den2/gcd) + num2*(den1/gcd);
00683         den = (den1/gcd)*den2;
00684         gcd = polygcd::gcd(num,den);
00685 #else
00686         den = den1/gcd;
00687         num = num1*(den2/gcd) + num2*den;
00688         den = den*den2;
00689         gcd = polygcd::gcd(num,gcd);
00690 #endif
00691     }
00692     else {
00693         num = num1 + num2;
00694         den = den1;
00695         gcd = polygcd::gcd(num,den);
00696     }
00697
00698     num /= gcd;
00699     den /= gcd;
00700

```

```

00701 // Fix sign
00702 if (den.sign() == -1) { num*=poly(BHEAD -1); den*=poly(BHEAD -1); }
00703
00704 // Check size: include FUNHEAD for the prf itself, an ARGHEAD each for num and den,
00705 // and 3 for the final coeff "1/1". We don't know here what the rest of the term looks like,
00706 // but it certainly has at least its total size (so +1):
00707 if ((num.size_of_form_notation() + den.size_of_form_notation() + FUNHEAD + 2*ARGHEAD + 3 + 1)
00708     > AM.MaxTer/(int)sizeof(WORD)) {
00709
00710     MLOCK(ErrorMessageLock);
00711     MesPrint ("ERROR: PolyRatFun doesn't fit in a term");
00712     MesPrint ("(1) num size = %d, den size = %d, rest = %d, MaxTermSize = %d words",
00713             num.size_of_form_notation()+ARGHEAD,
00714             den.size_of_form_notation()+ARGHEAD,
00715             FUNHEAD + 3 + 1,
00716             AM.MaxTer/sizeof(WORD));
00717     MUNLOCK(ErrorMessageLock);
00718     Terminate(-1);
00719 }
00720
00721 // Format result in Form notation
00722 WORD *t = oldworkpointer;
00723
00724 *t++ = AR.PolyFun; // function
00725 *t++ = 0; // length (to be determined)
00726 // *t++ &= ~MUSTCLEANPRF; // clean polyratfun
00727 *t++ = 0;
00728 FILLFUN3(t); // header
00729 poly::poly_to_argument(num,t, true); // argument 1 (numerator)
00730 if (*t>0 && t[1]==DIRTYFLAG) // to Form order
00731     poly_sort(BHEAD t);
00732 t += (*t>0 ? *t : 2);
00733 poly::poly_to_argument(den,t, true); // argument 2 (denominator)
00734 if (*t>0 && t[1]==DIRTYFLAG) // to Form order
00735     poly_sort(BHEAD t);
00736 t += (*t>0 ? *t : 2);
00737
00738 oldworkpointer[1] = t - oldworkpointer; // length
00739 AT.WorkPointer = t;
00740
00741 poly_free_poly_vars(BHEAD "AN.poly_vars_ratfun_add");
00742
00743 // reset modulo calculation
00744 AN.ncmod = AC.ncmod;
00745
00746 return oldworkpointer;
00747 }
00748
00749 /*
00750 #] poly_ratfun_add :
00751 #[ poly_ratfun_normalize :
00752 */
00753
00769 int poly_ratfun_normalize (PHEAD WORD *term) {
00770
00771 #ifdef WITHFLINT
00772     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
00773         flint_ratfun_normalize(BHEAD term);
00774         return 0;
00775     }
00776 #endif
00777
00778 #ifdef DEBUG
00779     cout << "*** [" << thetime() << "]" CALL : poly_ratfun_normalize" << endl;
00780 #endif
00781
00782 // Strip coefficient
00783 WORD *tstop = term + *term;
00784 int ncoeff = tstop[-1];
00785 tstop -= ABS(ncoeff);
00786
00787 // if only one clean polyratfun, return immediately
00788 int num_polyratfun = 0;
00789
00790 for (WORD *t=term+1; t<tstop; t+=t[1])
00791     if (*t == AR.PolyFun) {
00792         num_polyratfun++;
00793         if ((t[2] & MUSTCLEANPRF) != 0)
00794             num_polyratfun = INT_MAX;
00795         if (num_polyratfun > 1) break;
00796     }
00797
00798 if (num_polyratfun <= 1) return 0;
00799
00800 WORD oldsorttype = AR.SortType;
00801 AR.SortType = SORTHIGFIRST;
00802

```

```

00803 /*
00804     When there are polyratfun's with only one variable: rename them
00805     temporarily to TMPPOLYFUN.
00806 */
00807 for (WORD *t=term+1; t<tstop; t+=t[1]) {
00808     if (*t == AR.PolyFun && (t[1] == FUNHEAD+t[FUNHEAD]
00809         || t[1] == FUNHEAD+2 ) ) { *t = TMPPOLYFUN; }
00810 }
00811
00812 // Extract all variables in the polyfuns
00813 vector<WORD *> e;
00814
00815 for (WORD *t=term+1; t<tstop; t+=t[1]) {
00816     if (*t == AR.PolyFun)
00817         for (WORD *t2 = t+FUNHEAD; t2<t+t[1];) {
00818             e.push_back(t2);
00819             NEXTARG(t2);
00820         }
00821 }
00822
00823 poly::get_variables(BHEAD e, true, true);
00824
00825 // Check for modulus calculus
00826 WORD modp=poly_determine_modulus(BHEAD true, true, "PolyRatFun");
00827
00828 // Accumulate total denominator/numerator and copy the remaining terms
00829 // We start with 'trivial' polynomials
00830 poly num1(BHEAD (UWORD *)tstop, ncoeff/2, modp, 1);
00831 poly den1(BHEAD (UWORD *)tstop+ABS(ncoeff/2), ABS(ncoeff)/2, modp, 1);
00832
00833 WORD *s = term+1;
00834
00835 for (WORD *t=term+1; t<tstop;)
00836     if (*t == AR.PolyFun) {
00837         poly num2(BHEAD 0, modp, 1);
00838         poly den2(BHEAD 0, modp, 1);
00839         poly_ratfun_read(t, num2, den2);
00840
00841         if ((t[2] & MUSTCLEANPRF) != 0) { // first normalize
00842             poly gcd1(polygcd::gcd(num2, den2));
00843             num2 = num2/gcd1;
00844             den2 = den2/gcd1;
00845         }
00846         t += t[1];
00847         poly gcd1(polygcd::gcd(num1, den2));
00848         poly gcd2(polygcd::gcd(num2, den1));
00849
00850         num1 = (num1 / gcd1) * (num2 / gcd2);
00851         den1 = (den1 / gcd2) * (den2 / gcd1);
00852     }
00853     else {
00854         int i = t[1];
00855         if (s != t) { NCOPY(s, t, i) }
00856         else { t += i; s += i; }
00857     }
00858 }
00859
00860 // Fix sign
00861 if (den1.sign() == -1) { num1*=poly(BHEAD -1); den1*=poly(BHEAD -1); }
00862
00863 // Check size: include FUNHEAD for the prf itself, an ARGHEAD each for num and den,
00864 // s-term for the copied term so far, and 3 for final coeff "1/1"
00865 if ((num1.size_of_form_notation() + den1.size_of_form_notation() + FUNHEAD + 2*ARGHEAD
00866     + s-term + 3) > AM.MaxTer/(int)sizeof(WORD)) {
00867     MLOCK(ErrorMessageLock);
00868     MesPrint ("ERROR: PolyRatFun doesn't fit in a term");
00869     MesPrint ("(2) num size = %d, den size = %d, rest = %d, MaxTermSize = %d words",
00870         num1.size_of_form_notation()+ARGHEAD,
00871         den1.size_of_form_notation()+ARGHEAD,
00872         FUNHEAD + s-term + 3,
00873         AM.MaxTer/sizeof(WORD));
00874     MUNLOCK(ErrorMessageLock);
00875     Terminate(-1);
00876 }
00877
00878 // Format result in Form notation
00879 WORD *t = s;
00880 *t++ = AR.PolyFun; // function
00881 *t++ = 0; // size (to be determined)
00882 *t++ &= ~MUSTCLEANPRF; // clean polyratfun
00883 FILLFUN3(t); // header
00884 poly::poly_to_argument(num1, t, true); // argument 1 (numerator)
00885 if (*t>0 && t[1]==DIRTYFLAG) // to Form order
00886     poly_sort(BHEAD t);
00887 t += (*t>0 ? *t : 2);
00888 poly::poly_to_argument(den1, t, true); // argument 2 (denominator)

```

```

00890     if (*t>0 && t[1]==DIRTYFLAG)           // to Form order
00891         poly_sort(BHEAD t);
00892     t += (*t>0 ? *t : 2);
00893
00894     s[1] = t - s;                           // function length
00895
00896     *t++ = 1;                                // term coefficient
00897     *t++ = 1;
00898     *t++ = 3;
00899
00900     term[0] = t-term;                        // term length
00901
00902     poly_free_poly_vars(BHEAD "AN.poly_vars_ratfun_normalize");
00903
00904     // reset modulo calculation
00905     AN.ncmod = AC.ncmod;
00906
00907     tstop = term + *term; tstop -= ABS(tstop[-1]);
00908     for (WORD *t=term+1; t<tstop; t+=t[1]) {
00909         if (*t == TMPPOLYFUN ) *t = AR.PolyFun;
00910     }
00911
00912     AR.SortType = oldsorttype;
00913     return 0;
00914 }
00915
00916 /*
00917 #] poly_ratfun_normalize :
00918 #[ poly_fix_minus_signs :
00919 */
00920
00921 void poly_fix_minus_signs (factorized_poly &a) {
00922
00923     if ( a.factor.empty() ) return;
00924
00925     POLY_GETIDENTITY(a.factor[0]);
00926
00927     int overall_sign = +1;
00928
00929     // find term with maximum power of highest symbol
00930     for (int i=0; i<(int)a.factor.size(); i++) {
00931
00932         int maxvar = -1;
00933         int maxpow = -1;
00934         int sign = +1;
00935
00936         WORD *tstop = a.factor[i].terms; tstop += *tstop;
00937         for (WORD *t=a.factor[i].terms+1; t<tstop; t+=*t)
00938             for (int j=0; j<AN.poly_num_vars; j++) {
00939                 int var = AN.poly_vars[j];
00940                 int pow = t[1+j];
00941                 if (pow>0 && (var>maxvar || (var==maxvar && pow>maxpow))) {
00942                     maxvar = var;
00943                     maxpow = pow;
00944                     sign = SGN(*(t+*t-1));
00945                 }
00946             }
00947
00948         // if negative coefficient, multiply by -1
00949         if (sign== -1) {
00950             a.factor[i] *= poly(BHEAD sign);
00951             if (a.power[i] % 2 == 1) overall_sign*=-1;
00952         }
00953     }
00954
00955     // if overall minus sign
00956     if (overall_sign == -1) {
00957         // look at constant factor and multiply by -1
00958         for (int i=0; i<(int)a.factor.size(); i++)
00959             if (a.factor[i].is_integer()) {
00960                 a.factor[i] *= poly(BHEAD -1);
00961                 return;
00962             }
00963
00964         // otherwise, add a factor of -1
00965         a.add_factor(poly(BHEAD -1), 1);
00966     }
00967 }
00968
00969 /*
00970 #] poly_fix_minus_signs :
00971 #[ poly_factorize :
00972 */
00973
00986 WORD *poly_factorize (PHEAD WORD *argin, WORD *argout, bool with_arghead, bool is_fun_arg) {
00987
00988 #ifdef DEBUG

```

```

00989     cout << "*** [" << thetime() << "]" CALL : poly_factorize" << endl;
00990 #endif
00991
00992     poly::get_variables(BHEAD vector<WORD*>(1,argin), with_arghead, true);
00993     poly den(BHEAD 0);
00994     poly a(poly::argument_to_poly(BHEAD argin, with_arghead, true, &den));
00995
00996     // check for modulus calculus
00997     WORD modp=poly_determine_modulus(BHEAD true, is_fun_arg, "polynomial factorization");
00998     a.setmod(modp,1);
00999
01000     // factorize
01001     factorized_poly f(polyfact::factorize(a));
01002     poly_fix_minus_signs(f);
01003
01004     poly num(BHEAD 1);
01005     for (int i=0; i<(int)f.factor.size(); i++)
01006         if (f.factor[i].is_integer())
01007             num = f.factor[i];
01008
01009     // determine size
01010     int len = with_arghead ? ARGHEAD : 0;
01011
01012     if (!num.is_one() || !den.is_one()) {
01013         len++;
01014         len += MAX(ABS(num[num[1]]), den[den[1]])*2+1;
01015         len += with_arghead ? ARGHEAD : 1;
01016     }
01017
01018     for (int i=0; i<(int)f.factor.size(); i++) {
01019         if (!f.factor[i].is_integer()) {
01020             len += f.power[i] * f.factor[i].size_of_form_notation();
01021             len += f.power[i] * (with_arghead ? ARGHEAD : 1);
01022         }
01023     }
01024
01025     len++;
01026
01027     if (argout != NULL) {
01028         // check size
01029         if (len >= AM.MaxTer) {
01030             MLOCK(ErrorMessageLock);
01031             MesPrint ("ERROR: factorization doesn't fit in a term (len = %d, MaxTermSize = %d words)",
01032                     len/sizeof(WORD), AM.MaxTer/sizeof(WORD));
01033             MUNLOCK(ErrorMessageLock);
01034             Terminate(-1);
01035         }
01036     }
01037     else {
01038         // allocate size
01039         argout = (WORD*) Malloc1(len*sizeof(WORD), "poly_factorize");
01040     }
01041
01042     WORD *old_argout = argout;
01043
01044     // constant factor
01045     if (!num.is_one() || !den.is_one()) {
01046         int n = max(ABS(num[num[1]]), ABS(den[den[1]]));
01047
01048         if (with_arghead) {
01049             *argout++ = ARGHEAD + 2 + 2*n;
01050             for (int i=1; i<ARGHEAD; i++)
01051                 *argout++ = 0;
01052         }
01053
01054         *argout++ = 2 + 2*n;
01055
01056         for (int i=0; i<n; i++)
01057             *argout++ = i<ABS(num[num[1]]) ? num[2+AN.poly_num_vars+i] : 0;
01058         for (int i=0; i<n; i++)
01059             *argout++ = i<ABS(den[den[1]]) ? den[2+AN.poly_num_vars+i] : 0;
01060
01061         *argout++ = SGN(num[num[1]]) * (2*n+1);
01062
01063         if (!with_arghead)
01064             *argout++ = 0;
01065         else {
01066             if (ToFast(old_argout, old_argout))
01067                 argout = old_argout+2;
01068         }
01069     }
01070
01071     // non-constant factors
01072     for (int i=0; i<(int)f.factor.size(); i++)
01073         if (!f.factor[i].is_integer())
01074             for (int j=0; j<f.power[i]; j++) {
01075                 poly::poly_to_argument(f.factor[i], argout, with_arghead);

```

```

01076
01077         if (with_arghead)
01078             argout += *argout > 0 ? *argout : 2;
01079         else {
01080             while (*argout!=0) argout+=*argout;
01081             argout++;
01082         }
01083     }
01084
01085     *argout=0;
01086
01087     poly_free_poly_vars(BHEAD "AN.poly_vars_factorize");
01088
01089     // reset modulo calculation
01090     AN.ncmod = AC.ncmod;
01091
01092     return old_argout;
01093 }
01094
01095 /*
01096 #] poly_factorize :
01097 #[ poly_factorize_argument :
01098 */
01099
01100 int poly_factorize_argument(PHEAD WORD *argin, WORD *argout) {
01101
01102     #ifdef DEBUG
01103         cout << "*** [" << thetime() << " ] CALL : poly_factorize_argument" << endl;
01104     #endif
01105
01106     #ifdef WITHFLINT
01107         if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
01108             flint_factorize_argument(BHEAD argin, argout);
01109             return 0;
01110         }
01111     #endif
01112
01113     poly_factorize(BHEAD argin,argout,true,true);
01114     return 0;
01115 }
01116
01117 /*
01118 #] poly_factorize_argument :
01119 #[ poly_factorize_dollar :
01120 */
01121
01122 WORD *poly_factorize_dollar (PHEAD WORD *argin) {
01123
01124     #ifdef DEBUG
01125         cout << "*** [" << thetime() << " ] CALL : poly_factorize_dollar" << endl;
01126     #endif
01127
01128     #ifdef WITHFLINT
01129         if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
01130             return flint_factorize_dollar(BHEAD argin);
01131         }
01132     #endif
01133
01134     return poly_factorize(BHEAD argin,NULL,false,false);
01135 }
01136
01137 /*
01138 #] poly_factorize_dollar :
01139 #[ poly_factorize_expression :
01140 */
01141
01142 int poly_factorize_expression(EXPRESSIONS expr) {
01143
01144     #ifdef DEBUG
01145         cout << "*** [" << thetime() << " ] CALL : poly_factorize_expression" << endl;
01146     #endif
01147
01148     GETIDENTITY;
01149
01150     if (AT.WorkPointer + AM.MaxTer > AT.WorkTop ) {
01151         MLOCK(ErrorMessageLock);
01152         MesWork();
01153         MUNLOCK(ErrorMessageLock);
01154         Terminate(-1);
01155     }
01156
01157     WORD *term = AT.WorkPointer;
01158     WORD startebuf = cbuf[AT.ebufnum].numrhs;
01159     FILEHANDLE *file;
01160     POSITION pos;
01161
01162     FILEHANDLE *oldinfile = AR.infile;

```

```

01199 FILEHANDLE *oldoutfile = AR.outfile;
01200 WORD oldBracketOn = AR.BracketOn;
01201 WORD *oldBrackBuf = AT.BrackBuf;
01202 WORD oldbracketindexflag = AT.bracketindexflag;
01203 char oldCommercial[COMMERCIALSIZE+2];
01204
01205 strcpy(oldCommercial, (char*)AC.Commercial);
01206 strcpy((char*)AC.Commercial, "factorize");
01207
01208 // locate is the input
01209 if (expr->status == HIDDENEXPRESSION || expr->status == HIDDENLEXPRESSION ||
01210     expr->status == INTOHIDEEXPRESSION || expr->status == INTOHIDELEXPRESSION) {
01211     AR.InHiBuf = 0; file = AR.hidefile; AR.GetFile = 2;
01212 }
01213 else {
01214     AR.InInBuf = 0; file = AR.outfile; AR.GetFile = 0;
01215 }
01216
01217 // read and write to expression file
01218 AR.infile = AR.outfile = file;
01219
01220 // dummy indices are not allowed
01221 if (expr->numdummies > 0) {
01222     MesPrint("ERROR: factorization with dummy indices not implemented");
01223     Terminate(-1);
01224 }
01225
01226 // determine whether the expression is on file or in memory
01227 if (file->handle >= 0) {
01228     pos = expr->onfile;
01229     SeekFile(file->handle, &pos, SEEK_SET);
01230     if (ISNOTEQUALPOS(pos, expr->onfile)) {
01231         MesPrint("ERROR: something wrong in scratch file [poly_factorize_expression]");
01232         Terminate(-1);
01233     }
01234     file->POposition = expr->onfile;
01235     file->POfull = file->PObuffer;
01236     if (expr->status == HIDDENEXPRESSION)
01237         AR.InHiBuf = 0;
01238     else
01239         AR.InInBuf = 0;
01240 }
01241 else {
01242     file->POfill = (WORD *) ((UBYTE *) (file->PObuffer) + BASEPOSITION(expr->onfile));
01243 }
01244
01245 SetScratch(AR.infile, &(expr->onfile));
01246
01247 // read the first header term
01248 WORD size = GetTerm(BHEAD term);
01249 if (size <= 0) {
01250     MesPrint("ERROR: something wrong with expression [poly_factorize_expression]");
01251     Terminate(-1);
01252 }
01253
01254 // store position: this is where the output will go
01255 pos = expr->onfile;
01256 ADDPOS(pos, size*sizeof(WORD));
01257
01258 // use polynomial as buffer, because it is easy to extend
01259 poly buffer(BHEAD 0);
01260 int bufpos = 0;
01261 int sumcommu = 0;
01262
01263 // read all terms
01264 while (GetTerm(BHEAD term)) {
01265     // substitute non-symbols by extra symbols
01266     sumcommu += DoesCommu(term);
01267     if (sumcommu > 1) {
01268         MesPrint("ERROR: Cannot factorize an expression with more than one noncommuting object");
01269         Terminate(-1);
01270     }
01271     buffer.check_memory(bufpos);
01272     if (LocalConvertToPoly(BHEAD term, buffer.terms + bufpos, startebuf, 0) < 0) {
01273         MesPrint("ERROR: in LocalConvertToPoly [factorize_expression]");
01274         Terminate(-1);
01275     }
01276     bufpos += *(buffer.terms + bufpos);
01277 }
01278 buffer[bufpos] = 0;
01279
01280 // parse the polynomial
01281
01282 AN.poly_num_vars = 0;
01283 poly::get_variables(BHEAD vector<WORD*>(1, buffer.terms), false, true);
01284 poly den(BHEAD 0);
01285 poly a(poly::argument_to_poly(BHEAD buffer.terms, false, true, &den));

```

```

01286
01287 // check for modulus calculus
01288 WORD modp=poly_determine_modulus(BHEAD true, false, "polynomial factorization");
01289 a.setmod(modp,1);
01290
01291 // create output
01292 SetScratch(file, &pos);
01293 NewSort(BHEAD0);
01294
01295 CBUF *C = cbuf+AC.cbufnum;
01296 CBUF *CC = cbuf+AT.ebufnum;
01297
01298 // turn brackets on. We force the existence of a bracket index.
01299 WORD nexpr = expr - Expressions;
01300 AR.BracketOn = 1;
01301 AT.BrackBuf = AM.BracketFactors;
01302 AT.bracketindexflag = 1;
01303 ClearBracketIndex(~nexpr-2); // Clears the index made during primary generation
01304 OpenBracketIndex(nexpr); // Set up a new index
01305
01306 if (a.is_zero()) {
01307     expr->numfactors = 1;
01308 }
01309 else if (a.is_one() && den.is_one()) {
01310     expr->numfactors = 1;
01311
01312     term[0] = 8;
01313     term[1] = SYMBOL;
01314     term[2] = 4;
01315     term[3] = FACTORSYMBOL;
01316     term[4] = 1;
01317     term[5] = 1;
01318     term[6] = 1;
01319     term[7] = 3;
01320
01321     AT.WorkPointer += *term;
01322     Generator(BHEAD term, C->numlhs);
01323     AT.WorkPointer = term;
01324 }
01325 else {
01326     factorized_poly fac;
01327     bool iszero = false;
01328
01329     if (!(expr->vflags & ISFACTORIZED)) {
01330         // factorize the polynomial
01331         fac = polyfact::factorize(a);
01332         poly_fix_minus_signs(fac);
01333     }
01334     else {
01335         int factorsymbol=-1;
01336         for (int i=0; i<AN.poly_num_vars; i++)
01337             if (AN.poly_vars[i] == FACTORSYMBOL)
01338                 factorsymbol = i;
01339
01340         poly denpow(BHEAD 1);
01341
01342         // already factorized, so factorize the factors
01343         for (int i=1; i<=expr->numfactors; i++) {
01344             poly origfac(a.coefficient(factorsymbol, i));
01345             factorized_poly fac2;
01346             if (origfac.is_zero())
01347                 iszero=true;
01348             else {
01349                 fac2 = polyfact::factorize(origfac);
01350                 poly_fix_minus_signs(fac2);
01351                 denpow *= den;
01352             }
01353             for (int j=0; j<(int)fac2.power.size(); j++)
01354                 fac.add_factor(fac2.factor[j], fac2.power[j]);
01355         }
01356
01357         // update denominator, since each factor was scaled
01358         den=denpow;
01359     }
01360
01361     expr->numfactors = 0;
01362
01363     // coefficient
01364     poly num(BHEAD 1);
01365     for (int i=0; i<(int)fac.factor.size(); i++)
01366         if (fac.factor[i].is_integer())
01367             num *= fac.factor[i];
01368
01369     poly gcd(polygcd::integer_gcd(num,den));
01370     den/=gcd;
01371     num/=gcd;
01372

```



```

01373         if (iszero)
01374             expr->numfactors++;
01375
01376         if (!iszero || (expr->vflags & KEEPZERO)) {
01377             if (!num.is_one() || !den.is_one()) {
01378                 expr->numfactors++;
01379
01380                 int n = max(ABS(num[num[1]]), ABS(den[den[1]]));
01381
01382                 term[0] = 6 + 2*n;
01383                 term[1] = SYMBOL;
01384                 term[2] = 4;
01385                 term[3] = FACTORSYMBOL;
01386                 term[4] = expr->numfactors;
01387                 for (int i=0; i<n; i++) {
01388                     term[5+i] = i<ABS(num[num[1]]) ? num[2+AN.poly_num_vars+i] : 0;
01389                     term[5+n+i] = i<ABS(den[den[1]]) ? den[2+AN.poly_num_vars+i] : 0;
01390                 }
01391                 term[5+2*n] = SGN(num[num[1]]) * (2*n+1);
01392                 AT.WorkPointer += *term;
01393                 Generator(BHEAD term, C->numlhs);
01394                 AT.WorkPointer = term;
01395             }
01396
01397             vector<poly> fac_arg(fac.factor.size(), poly(BHEAD 0));
01398
01399             // convert the non-constant factors to Form-style arguments
01400             for (int i=0; i<(int)fac.factor.size(); i++)
01401                 if (!fac.factor[i].is_integer()) {
01402                     buffer.check_memory(fac.factor[i].size_of_form_notation()+1);
01403                     poly::poly_to_argument(fac.factor[i], buffer.terms, false);
01404                     NewSort(BHEAD0);
01405
01406                     for (WORD *t=buffer.terms; *t!=0; t+=*t) {
01407                         // substitute extra symbols
01408                         if (ConvertFromPoly(BHEAD t, term, numxsymbol,
01409                             CC->numrhs-startebuf+numxsymbol,
01410                             startebuf-numxsymbol, 1) <= 0 ) {
01411                             MesPrint("ERROR: in ConvertFromPoly [factorize_expression]");
01412                             Terminate(-1);
01413                             return(-1);
01414                         }
01415
01416                         // store term
01417                         AT.WorkPointer += *term;
01418                         Generator(BHEAD term, C->numlhs);
01419                         AT.WorkPointer = term;
01420                     }
01421
01422                     // sort and store in buffer
01423                     WORD *buffer;
01424                     if (EndSort(BHEAD (WORD *)((void *)(&buffer)),2) < 0) return -1;
01425
01426                     LONG bufsize=0;
01427                     for (WORD *t=buffer; *t!=0; t+=*t)
01428                         bufsize+=*t;
01429
01430                     fac_arg[i].check_memory(bufsize+ARGHEAD+1);
01431
01432                     for (int j=0; j<ARGHEAD; j++)
01433                         fac_arg[i].terms[j] = 0;
01434                     fac_arg[i].terms[0] = ARGHEAD + bufsize;
01435                     WCOPY(fac_arg[i].terms+ARGHEAD, buffer, bufsize);
01436                     M_free(buffer, "polynomial factorization");
01437                 }
01438
01439             // compare and sort the factors in Form notation
01440             vector<int> order;
01441             vector<vector<int>> comp(fac.factor.size(), vector<int>(fac.factor.size(), 0));
01442
01443             for (int i=0; i<(int)fac.factor.size(); i++)
01444                 if (!fac.factor[i].is_integer()) {
01445                     order.push_back(i);
01446
01447                     for (int j=i+1; j<(int)fac.factor.size(); j++)
01448                         if (!fac.factor[j].is_integer()) {
01449                             comp[i][j] = CompArg(fac_arg[j].terms, fac_arg[i].terms);
01450                             comp[j][i] = -comp[i][j];
01451                         }
01452                 }
01453
01454             for (int i=0; i<(int)order.size(); i++)
01455                 for (int j=0; j+1<(int)order.size(); j++)
01456                     if (comp[order[i]][order[j]] == 1)
01457                         swap(order[i], order[j]);
01458
01459             // create the final expression

```

```

01459         for (int i=0; i<(int)order.size(); i++)
01460             for (int j=0; j<fac.power[order[i]]; j++) {
01461
01462                 expr->numfactors++;
01463
01464                 WORD *tstop = fac_arg[order[i]].terms + *fac_arg[order[i]].terms;
01465                 for (WORD *t=fac_arg[order[i]].terms+ARGHEAD; t<tstop; t+=*t) {
01466
01467                     WCOPY(term+4, t, *t);
01468
01469                     // add special symbol "factor_"
01470                     *term = *(term+4) + 4;
01471                     *(term+1) = SYMBOL;
01472                     *(term+2) = 4;
01473                     *(term+3) = FACTORSYMBOL;
01474                     *(term+4) = expr->numfactors;
01475
01476                     // store term
01477                     AT.WorkPointer += *term;
01478                     Generator(BHEAD term, C->numlhs);
01479                     AT.WorkPointer = term;
01480                 }
01481             }
01482     }
01483 }
01484
01485 // final sorting
01486 if (EndSort(BHEAD NULL,0) < 0) {
01487     LowerSortLevel();
01488     Terminate(-1);
01489 }
01490
01491 // set factorized flag
01492 if (expr->numfactors > 0)
01493     expr->vflags |= ISFACTORIZED;
01494
01495 // clean up
01496 AR.infile = oldinfile;
01497 AR.outfile = oldoutfile;
01498 AR.BracketOn = oldBracketOn;
01499 AT.BrackBuf = oldBrackBuf;
01500 AT.bracketindexflag = oldbracketindexflag;
01501 strcpy((char*)AC.Commercial, oldCommercial);
01502
01503 poly_free_poly_vars(BHEAD "AN.poly_vars_factorize_expression");
01504
01505 return 0;
01506 }
01507
01508 /*
01509 #] poly_factorize_expression :
01510 #[ poly_unfactorize_expression :
01511 */
01512
01513 #if ( SUBEXPSIZE == 5 )
01514 static WORD genericterm[] = {38,1,4,FACTORSYMBOL,0
01515 ,EXPRESSION,15,0,1,0,13,10,8,1,4,FACTORSYMBOL,0,1,1,3
01516 ,EXPRESSION,15,0,1,0,13,10,8,1,4,FACTORSYMBOL,0,1,1,3
01517 ,1,1,3,0};
01518 static WORD genericterm2[] = {23,1,4,FACTORSYMBOL,0
01519 ,EXPRESSION,15,0,1,0,13,10,8,1,4,FACTORSYMBOL,0,1,1,3
01520 ,1,1,3,0};
01521 #endif
01522
01523 int poly_unfactorize_expression(EXPRESSIONS expr)
01524 {
01525     GETIDENTITY;
01526     int i, j, nfac = expr->numfactors, nfacp, nexpr = expr - Expressions;
01527     int expriszero = 0;
01528
01529     FILEHANDLE *oldinfile = AR.infile;
01530     FILEHANDLE *oldoutfile = AR.outfile;
01531     char oldCommercial[COMMERCIALSIZE+2];
01532
01533     WORD *oldworkpointer = AT.WorkPointer;
01534     WORD *term = AT.WorkPointer, *t, *w, size;
01535
01536     FILEHANDLE *file;
01537     POSITION pos, oldpos;
01538
01539     WORD oldBracketOn = AR.BracketOn;
01540     WORD *oldBrackBuf = AT.BrackBuf;
01541     CBUF *C = cbuf+AC.cbunum;
01542
01543     if ( ( expr->vflags & ISFACTORIZED ) == 0 ) return(0);
01544
01545     if ( AT.WorkPointer + AM.MaxTer > AT.WorkTop ) {

```

```

01558         MLOCK(ErrorMessageLock);
01559         MesWork();
01560         MUNLOCK(ErrorMessageLock);
01561         Terminate(-1);
01562     }
01563
01564     oldpos = AS.OldOnFile[nexpr];
01565     AS.OldOnFile[nexpr] = expr->onfile;
01566
01567     strcpy(oldCommercial, (char*)AC.Commercial);
01568     strcpy((char*)AC.Commercial, "unfactorize");
01569 /*
01570     locate the input
01571 */
01572     if ( expr->status == HIDDENEXPRESSION || expr->status == HIDDENLEXPRESSION ||
01573         expr->status == INTOHIDEEXPRESSION || expr->status == INTOHIDELEXPRESSION ) {
01574         AR.InHiBuf = 0; file = AR.hidefile; AR.GetFile = 2;
01575     }
01576     else {
01577         AR.InInBuf = 0; file = AR.outfile; AR.GetFile = 0;
01578     }
01579 /*
01580     read and write to expression file
01581 */
01582     AR.infile = AR.outfile = file;
01583 /*
01584     set the input file to the correct position
01585 */
01586     if ( file->handle >= 0 ) {
01587         pos = expr->onfile;
01588         SeekFile(file->handle, &pos, SEEK_SET);
01589         if (ISNOTEQUALPOS(pos, expr->onfile)) {
01590             MesPrint("ERROR: something wrong in scratch file unfactorize_expression");
01591             Terminate(-1);
01592         }
01593         file->POposition = expr->onfile;
01594         file->POfull = file->PObuffer;
01595         if ( expr->status == HIDDENEXPRESSION )
01596             AR.InHiBuf = 0;
01597         else
01598             AR.InInBuf = 0;
01599     }
01600     else {
01601         file->POfill = (WORD *) ((UBYTE *) (file->PObuffer) + BASEPOSITION(expr->onfile));
01602     }
01603     SetScratch(AR.infile, &(expr->onfile));
01604 /*
01605     Test for whether the first factor is zero.
01606 */
01607     if ( GetFirstBracket(term, nexpr) < 0 ) Terminate(-1);
01608     if ( term[4] != 1 || *term != 8 || term[1] != SYMBOL || term[3] != FACTORSYMBOL || term[4] != 1 )
01609     {
01610         expriszero = 1;
01611     }
01612     SetScratch(AR.infile, &(expr->onfile));
01613 /*
01614     Read the prototype. After this we have the file ready for the output at pos.
01615 */
01616     size = GetTerm(BHEAD term);
01617     if ( size <= 0 ) {
01618         MesPrint ("ERROR: something wrong with expression unfactorize_expression");
01619         Terminate(-1);
01620     }
01621     pos = expr->onfile;
01622     ADDPOS(pos, size*sizeof(WORD));
01623 /*
01624     Set the brackets straight
01625 */
01626     AR.BracketOn = 1;
01627     AT.BrackBuf = AM.BracketFactors;
01628     AT.bracketinfo = 0;
01629     while ( nfac > 2 ) {
01630         nfacp = nfac - nfac%2;
01631 /*
01632     Prepare the bracket index. We have:
01633         e->bracketinfo: the old input bracket index
01634         e->newbracketinfo: the bracket index made for our current input
01635     We need to keep e->bracketinfo in case other workers need it (InParallel)
01636     Hence we work with AT.bracketinfo which takes priority.
01637     Note that in Processor we forced a newbracketinfo to be made.
01638 */
01639     if ( AT.bracketinfo != 0 ) ClearBracketIndex(-1);
01640     AT.bracketinfo = expr->newbracketinfo;
01641     OpenBracketIndex(nexpr);
01642 /*
01643     Now emulate the terms:
01644         sum_(i,0,nfacp,2,factor_^(i/2+1)*F[factor_^(i+1)]*F[factor_^(i+2)])

```

```

01644         +factor_^(nfacp/2+1)*F[factor_^nfac]
01645     */
01646     NewSort(BHEAD0);
01647     if ( expriszero == 0 ) {
01648         for ( i = 0; i < nfacp; i += 2 ) {
01649             t = genericterm; w = term = oldworkpointer;
01650             j = *t; NCOPY(w,t,j);
01651             term[4] = i/2+1;
01652             term[7] = nexpr;
01653             term[16] = i+1;
01654             term[22] = nexpr;
01655             term[31] = i+2;
01656             AT.WorkPointer = term + *term;
01657             Generator(BHEAD term, C->numlhs);
01658         }
01659         if ( nfac > nfacp ) {
01660             t = genericterm2; w = term = oldworkpointer;
01661             j = *t; NCOPY(w,t,j);
01662             term[4] = i/2+1;
01663             term[7] = nexpr;
01664             term[16] = nfac;
01665             AT.WorkPointer = term + *term;
01666             Generator(BHEAD term, C->numlhs);
01667         }
01668     }
01669     if ( EndSort(BHEAD AM.S0->sBuffer,0) < 0 ) {
01670         LowerSortLevel();
01671         Terminate(-1);
01672     }
01673     /*
01674     Set the file back into reading position
01675     */
01676     SetScratch(file, &pos);
01677     nfac = (nfac+1)/2;
01678     if ( expriszero ) { nfac = 1; }
01679 }
01680 if ( AT.bracketinfo != 0 ) ClearBracketIndex(-1);
01681 AT.bracketinfo = expr->newbracketinfo;
01682 expr->newbracketinfo = 0;
01683 /*
01684 Reset the brackets to make them ready for the final pass
01685 */
01686 AR.BracketOn = oldBracketOn;
01687 AT.BrackBuf = oldBrackBuf;
01688 if ( AR.BracketOn ) OpenBracketIndex(nexpr);
01689 /*
01690 We distinguish two cases: nfac == 2 and nfac == 1
01691 After preparing the term we skip the factor_ part.
01692 */
01693 NewSort(BHEAD0);
01694 if ( expriszero == 0 ) {
01695     if ( nfac == 1 ) {
01696         t = genericterm2; w = term = oldworkpointer;
01697         j = *t; NCOPY(w,t,j);
01698         term[7] = nexpr;
01699         term[16] = nfac;
01700     }
01701     else if ( nfac == 2 ) {
01702         t = genericterm; w = term = oldworkpointer;
01703         j = *t; NCOPY(w,t,j);
01704         term[7] = nexpr;
01705         term[16] = 1;
01706         term[22] = nexpr;
01707         term[31] = 2;
01708     }
01709     else {
01710         AS.OldOnFile[nexpr] = oldpos;
01711         return(-1);
01712     }
01713     term[4] = term[0]-4;
01714     term += 4;
01715     AT.WorkPointer = term + *term;
01716     Generator(BHEAD term, C->numlhs);
01717 }
01718 if ( EndSort(BHEAD AM.S0->sBuffer,0) < 0 ) {
01719     LowerSortLevel();
01720     Terminate(-1);
01721 }
01722 /*
01723 Final Cleanup
01724 */
01725 expr->numfactors = 0;
01726 expr->vflags &= ~ISFACTORIZED;
01727 if ( AT.bracketinfo != 0 ) ClearBracketIndex(-1);
01728
01729 AR.infile = oldinfile;
01730 AR.outfile = oldoutfile;

```

```

01731     strcpy((char*)AC.Commercial, oldCommercial);
01732     AT.WorkPointer = oldworkpointer;
01733     AS.OldOnFile[nexpr] = oldpos;
01734
01735     return(0);
01736 }
01737
01738 /*
01739 #] poly_unfactorize_expression :
01740 #[ poly_inverse :
01741 */
01742
01743 WORD *poly_inverse(PHEAD WORD *arga, WORD *argb) {
01744
01745 #ifdef WITHFLINT
01746     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
01747         return flint_inverse(BHEAD arga, argb);
01748     }
01749 #endif
01750
01751 #ifdef DEBUG
01752     cout << "*** [" << thetime() << "]" CALL : poly_inverse" << endl;
01753 #endif
01754
01755     // Extract variables
01756     vector<WORD *> e;
01757     e.reserve(2);
01758     e.push_back(arga);
01759     e.push_back(argb);
01760     poly::get_variables(BHEAD e, false, true);
01761
01762     if (AN.poly_num_vars > 1) {
01763         MLOCK(ErrorMessageLock);
01764         MesPrint ((char*)"ERROR: multivariate polynomial inverse is generally impossible");
01765         MUNLOCK(ErrorMessageLock);
01766         Terminate(-1);
01767     }
01768
01769     poly finalden(BHEAD 1), finalres(BHEAD 1);
01770     int ressize = 0;
01771     WORD *res = NULL;
01772
01773     // Convert to polynomials
01774     poly dena(BHEAD 0); // We need to keep the overall denominator of arga, to multiply the result
01775     poly a(poly::argument_to_poly(BHEAD arga, false, true, &dena));
01776     poly b(poly::argument_to_poly(BHEAD argb, false, true));
01777
01778     // Divide out the integer content, FORM has not already done this.
01779     poly content_a(BHEAD 0), content_b(BHEAD 0);
01780     content_a = polygcd::integer_content(a);
01781     content_b = polygcd::integer_content(b);
01782     a /= content_a;
01783     b /= content_b;
01784
01785     poly invamodp(BHEAD 0), invbmodp(BHEAD 0);
01786     WORD modp = 0;
01787
01788     // Special cases:
01789     // Possibly strange that we give 1 for inverse_(x1,1) but here we take MMA's convention.
01790     if ((a.is_one() && b.is_one()) || a.is_one()) {
01791         finalres = poly(BHEAD 1);
01792     }
01793     else if (b.is_one()) {
01794         finalres = poly(BHEAD 0);
01795     }
01796     else {
01797         // Check for modulus calculus
01798         modp=poly_determine_modulus(BHEAD true, true, "polynomial inverse");
01799         const bool mod_calc = modp==0 ? false : true;
01800         a.setmod(modp,1);
01801         b.setmod(modp,1);
01802
01803         // Check the gcd of a,b: if it is != 1, the inverse does not exist.
01804         poly gcd(polygcd::gcd(a,b));
01805         if (!gcd.is_one()) {
01806             MLOCK(ErrorMessageLock);
01807             if (mod_calc) {
01808                 MesPrint ((char*)"ERROR: polynomial inverse does not exist (mod %d)", modp);
01809             }
01810             else {
01811                 MesPrint ((char*)"ERROR: polynomial inverse does not exist");
01812             }
01813             MUNLOCK(ErrorMessageLock);
01814             Terminate(-1);
01815         }
01816
01817         bool inv_exists = true;

```

```

01818     do {
01819         // If we are not using modulus calculus, find a suitable prime for xgcd:
01820         if (!mod_calc) {
01821             vector<int> x(1,0);
01822             modp = polyfact::choose_prime(a.integer_lcoeff()*b.integer_lcoeff(), x, modp);
01823         }
01824
01825         poly amodp(a,modp,1);
01826         poly bmodp(b,modp,1);
01827
01828         // Calculate gcd
01829         vector<poly> xgcd(polyfact::extended_gcd_Euclidean_lifted(amodp,bmodp));
01830         invamodp = poly(xgcd[0]);
01831         invbmodp = poly(xgcd[1]);
01832
01833         inv_exists = ((invamodp * amodp) % bmodp).is_one();
01834         if (!inv_exists && mod_calc) {
01835             // Control should not reach here!
01836             MLOCK(ErrorMessageLock);
01837             MesPrint ((char*)"ERROR: polynomial inverse does not exist (mod %d) B", modp);
01838             MUNLOCK(ErrorMessageLock);
01839             Terminate(-1);
01840         }
01841
01842         // If the inverse does not exist and we are not working in modulus calculus,
01843         // choose a new prime and try again. This loop should always terminate, as
01844         // we have already checked that gcd(a,b) == 1.
01845     } while (!inv_exists);
01846
01847     // estimate of the size of the Form notation; might be extended later
01848     ressize = invamodp.size_of_form_notation()+1;
01849     res = (WORD *)Malloca(ressize*sizeof(WORD), "poly_inverse");
01850
01851     // initialize polynomials to store the result
01852     poly primepower(BHEAD modp);
01853     poly inva(invamodp,modp,1);
01854     poly invb(invbmop,modp,1);
01855
01856     while (true) {
01857         // convert to Form notation
01858         int j=0;
01859         WORD n=0;
01860         for (int i=1; i<inva[0]; i+=inva[i]) {
01861
01862             // check whether res should be extended
01863             while (ressize < j + 2*ABS(inva[i+inva[i]-1]) + (inva[i+1]>0?4:0) + 3) {
01864                 int newressize = 2*ressize;
01865
01866                 WORD *newres = (WORD *)Malloca(newressize*sizeof(WORD), "poly_inverse");
01867                 WCOPY(newres, res, ressize);
01868                 M_free(res, "poly_inverse");
01869                 res = newres;
01870                 ressize = newressize;
01871             }
01872
01873             res[j] = 1;
01874             if (inva[i+1]>0) {
01875                 res[j+res[j]++] = SYMBOL;
01876                 res[j+res[j]++] = 4;
01877                 res[j+res[j]++] = AN.poly_vars[0];
01878                 res[j+res[j]++] = inva[i+1];
01879             }
01880             MakeLongRational(BHEAD (UWORD *)&inva[i+2], inva[i+inva[i]-1],
01881                             (UWORD*)&primepower.terms[3],
01882                             primepower.terms[primepower.terms[1]],
01883                             (UWORD *)&res[j+res[j]], &n);
01884             res[j] += 2*ABS(n);
01885             res[j+res[j]++] = SGN(n)*(2*ABS(n)+1);
01886             j += res[j];
01887         }
01888         res[j]=0;
01889
01890         // if modulus calculus is set, this is the answer
01891         if (a.modp != 0) break;
01892
01893         // otherwise check over integers
01894         poly den(BHEAD 0);
01895         poly check(poly::argument_to_poly(BHEAD res, false, true, &den));
01896         // Shortcut: if b's lcoeff doesn't divide the lcoeff of check*a,
01897         // b certainly doesn't divide check*a:
01898         if (poly::divides(b.integer_lcoeff(), check.integer_lcoeff()*a.integer_lcoeff())) {
01899             check = check*a - den;
01900             if (poly::divides(b, check)) break;
01901         }
01902
01903         // if incorrect, lift with quadratic p-adic Newton's iteration.
01904         poly error((poly(BHEAD 1) - a*inva - b*invb) / primepower);

```

```

01904         poly errormodpp(error, modp, inva.modn);
01905
01906         inva.modn *= 2;
01907         invb.modn *= 2;
01908
01909         poly dinva((inva * errormodpp) % b);
01910         poly dinvb((invb * errormodpp) % a);
01911
01912         inva += dinva * primepower;
01913         invb += dinvb * primepower;
01914
01915         primepower *= primepower;
01916     }
01917
01918     // One more round trip from form -> poly -> form, to multiply by dena in an easy way
01919     finalres = poly(poly::argument_to_poly(BHEAD res, false, true, &finalden));
01920 }
01921
01922 finalres *= dena;
01923 // The overall denominator additionally needs to be multiplied by content_a:
01924 finalden *= content_a;
01925 const WORD finalden_size = finalden.terms[finalden.terms[1]];
01926 const int finalsize = finalres.size_of_form_notation_with_den(finalden_size)+1;
01927 if (ressize < finalsize) {
01928     if (res != NULL) {
01929         M_free(res, "poly_inverse");
01930     }
01931     res = (WORD *)Malloca(finalsize*sizeof(WORD), "poly_inverse");
01932 }
01933 poly::poly_to_argument_with_den(finalres, finalden_size,
01934     (UWORD*)&(finalden.terms[finalden.terms[1] - ABS(finalden_size)]), res, false);
01935
01936 // clean up and reset modulo calculation
01937 poly_free_poly_vars(BHEAD "AN.poly_vars_inverse");
01938
01939 AN.ncmod = AC.ncmod;
01940 return res;
01941 }
01942
01943 /*
01944 #] poly_inverse :
01945 #[ poly_mul :
01946 */
01947
01948 WORD *poly_mul(PHEAD WORD *a, WORD *b) {
01949
01950 #ifdef DEBUG
01951     cout << "*** [" << thetime() << "]" CALL : poly_mul" << endl;
01952 #endif
01953
01954 #ifdef WITHFLINT
01955     if ( AC.FlintPolyFlag && AC.ncmod==0 ) {
01956         return flint_mul(BHEAD a, b);
01957     }
01958 #endif
01959
01960     // Extract variables
01961     vector<WORD *> e;
01962     e.reserve(2);
01963     e.push_back(a);
01964     e.push_back(b);
01965     poly::get_variables(BHEAD e, false, false); // TODO: any performance effect by sort_vars=true?
01966
01967     // Convert to polynomials
01968     poly dena(BHEAD 0);
01969     poly denb(BHEAD 0);
01970     poly pa(poly::argument_to_poly(BHEAD a, false, true, &dena));
01971     poly pb(poly::argument_to_poly(BHEAD b, false, true, &denb));
01972
01973     // Check for modulus calculus
01974     WORD modp = poly_determine_modulus(BHEAD true, true, "polynomial multiplication");
01975     pa.setmod(modp, 1);
01976
01977     // NOTE: mul_ is currently implemented by translating negative powers of
01978     // symbols to extra symbols. For future improvement, it may be better to
01979     // compute
01980     // (content(a) * content(b)) * (a/content(a)) * (b/content(b))
01981     // to avoid introducing extra symbols for "mixed" cases, e.g.,
01982     // (1+x) * (1/x) -> (1+x) * (1+Z1_).
01983     assert(dena.is_integer());
01984     assert(denb.is_integer());
01985     assert(modp == 0 || dena.is_one());
01986     assert(modp == 0 || denb.is_one());
01987
01988     // multiplication
01989     pa *= pb;
01990

```

```


01991     // convert to Form notation
01992     WORD *res;
01993     if (dena.is_one() && denb.is_one()) {
01994         res = (WORD *)Malloca1((pa.size_of_form_notation() + 1) * sizeof(WORD), "poly_mul");
01995         poly::poly_to_argument(pa, res, false);
01996     } else {
01997         dena *= denb;
01998         res = (WORD *)Malloca1((pa.size_of_form_notation_with_den(dena[dena[1]]) + 1) * sizeof(WORD),
01999 "poly_mul");
01999         poly::poly_to_argument_with_den(pa, dena[dena[1]], (const UWORD *)&dena[2+AN.poly_num_vars],
02000 res, false);
02001     }
02002     // clean up and reset modulo calculation
02003     poly_free_poly_vars(BHEAD "AN.poly_vars_mul");
02004     AN.ncmod = AC.ncmod;
02005     return res;
02006 }
02007 }
02008
02009 /*
02010 #] poly_mul :
02011 #[ poly_free_poly_vars :
02012 */
02013
02014 void poly_free_poly_vars(PHEAD const char *text)
02015 {
02016     if ( AN.poly_vars_type == 0 ) {
02017         TermFree(AN.poly_vars, text);
02018     }
02019     else {
02020         M_free(AN.poly_vars, text);
02021     }
02022     AN.poly_num_vars = 0;
02023     AN.poly_vars = 0;
02024 }
02025
02026 /*
02027 #] poly_free_poly_vars :
02028 */

```

4.113 portsignals.h File Reference

#include <signal.h>

Include dependency graph for portsignals.h:



Macros

- #define [FATAL_SIG_ERROR](#) 4
- #define [NSIG](#) (1024)
- #define [SIGSEGV](#) (NSIG+1)
- #define [SIGFPE](#) (NSIG+2)

- `#define SIGILL (NSIG+3)`
- `#define SIGEMT (NSIG+4)`
- `#define SIGSYS (NSIG+5)`
- `#define SIGPIPE (NSIG+6)`
- `#define SIGLOST (NSIG+7)`
- `#define SIGXCPU (NSIG+8)`
- `#define SIGXFSZ (NSIG+9)`
- `#define SIGTERM (NSIG+10)`
- `#define SIGINT (NSIG+11)`
- `#define SIGQUIT (NSIG+12)`
- `#define SIGHUP (NSIG+13)`
- `#define SIGALRM (NSIG+14)`
- `#define SIGVTALRM (NSIG+15)`
- `#define SIGPROF (NSIG+16)`

4.113.1 Detailed Description

Contains definitions for signals used/intercepted in FORM.

Some systems (especially LINUX) have not enough signals available so some of the (!documented!) signals are not defined. This file contains the definition of all signals used in the program. If the signal is not defined we define it as unused ($>NSIG$).

The include of signal.h must be first, before we try to define undefined signals.

Definition in file [portsignals.h](#).

4.113.2 Macro Definition Documentation

4.113.2.1 FATAL_SIG_ERROR

```
#define FATAL_SIG_ERROR 4
```

Definition at line 47 of file [portsignals.h](#).

4.113.2.2 NSIG

```
#define NSIG (1024)
```

Definition at line 53 of file [portsignals.h](#).

4.113.2.3 SIGSEGV

```
#define SIGSEGV (NSIG+1)
```

Definition at line 57 of file [portsignals.h](#).

4.113.2.4 SIGFPE

```
#define SIGFPE (NSIG+2)
```

Definition at line 60 of file [portsignals.h](#).

4.113.2.5 SIGILL

```
#define SIGILL (NSIG+3)
```

Definition at line 63 of file [portsignals.h](#).

4.113.2.6 SIGEMT

```
#define SIGEMT (NSIG+4)
```

Definition at line 66 of file [portsignals.h](#).

4.113.2.7 SIGSYS

```
#define SIGSYS (NSIG+5)
```

Definition at line 69 of file [portsignals.h](#).

4.113.2.8 SIGPIPE

```
#define SIGPIPE (NSIG+6)
```

Definition at line 72 of file [portsignals.h](#).

4.113.2.9 SIGLOST

```
#define SIGLOST (NSIG+7)
```

Definition at line 75 of file [portsignals.h](#).

4.113.2.10 SIGXCPU

```
#define SIGXCPU (NSIG+8)
```

Definition at line 78 of file [portsignals.h](#).

4.113.2.11 SIGXFSZ

```
#define SIGXFSZ (NSIG+9)
```

Definition at line 81 of file [portsignals.h](#).

4.113.2.12 SIGTERM

```
#define SIGTERM (NSIG+10)
```

Definition at line 84 of file [portsignals.h](#).

4.113.2.13 SIGINT

```
#define SIGINT (NSIG+11)
```

Definition at line 87 of file [portsignals.h](#).

4.113.2.14 SIGQUIT

```
#define SIGQUIT (NSIG+12)
```

Definition at line 90 of file [portsignals.h](#).

4.113.2.15 SIGHUP

```
#define SIGHUP (NSIG+13)
```

Definition at line 93 of file [portsignals.h](#).

4.113.2.16 SIGALRM

```
#define SIGALRM (NSIG+14)
```

Definition at line 96 of file [portsignals.h](#).

4.113.2.17 SIGVTALRM

```
#define SIGVTALRM (NSIG+15)
```

Definition at line 99 of file [portsignals.h](#).

4.113.2.18 SIGPROF

```
#define SIGPROF (NSIG+16)
```

Definition at line 102 of file [portsignals.h](#).

4.114 portsignals.h

[Go to the documentation of this file.](#)

```
00001 #ifndef PORTSIGNAL_H
00002 #define PORTSIGNAL_H
00003
00018 /* #[] License : */
00019 /*
00020  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00021  * When using this file you are requested to refer to the publication
00022  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00023  * This is considered a matter of courtesy as the development was paid
00024  * for by FOM the Dutch physics granting agency and we would like to
00025  * be able to track its scientific use to convince FOM of its value
00026  * for the community.
00027  *
00028  * This file is part of FORM.
00029  *
00030  * FORM is free software: you can redistribute it and/or modify it under the
00031  * terms of the GNU General Public License as published by the Free Software
00032  * Foundation, either version 3 of the License, or (at your option) any later
00033  * version.
00034  *
00035  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00036  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00037  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00038  * details.
00039  *
00040  * You should have received a copy of the GNU General Public License along
00041  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00042  */
00043 /* #[] License : */
00044
00045 #include <signal.h>
00046
00047 #define FATAL_SIG_ERROR 4
00048
00049 #ifndef NSIG
00050 /*
00051  * The value of NSIG must be enough to fall outside the range of defined signals
00052  */
00053 #define NSIG (1024)
00054 #endif
00055
00056 #ifndef SIGSEGV
00057 #define SIGSEGV (NSIG+1)
00058 #endif
00059 #ifndef SIGFPE
00060 #define SIGFPE (NSIG+2)
00061 #endif
00062 #ifndef SIGILL
00063 #define SIGILL (NSIG+3)
00064 #endif
00065 #ifndef SIGEMT
00066 #define SIGEMT (NSIG+4)
00067 #endif
00068 #ifndef SIGSYS
00069 #define SIGSYS (NSIG+5)
00070 #endif
00071 #ifndef SIGPIPE
00072 #define SIGPIPE (NSIG+6)
00073 #endif
00074 #ifndef SIGLOST
00075 #define SIGLOST (NSIG+7)
00076 #endif
00077 #ifndef SIGXCPU
00078 #define SIGXCPU (NSIG+8)
00079 #endif
00080 #ifndef SIGXFSZ
00081 #define SIGXFSZ (NSIG+9)
00082 #endif
00083 #ifndef SIGTERM
00084 #define SIGTERM (NSIG+10)
00085 #endif
00086 #ifndef SIGINT
00087 #define SIGINT (NSIG+11)
00088 #endif
00089 #ifndef SIGQUIT
00090 #define SIGQUIT (NSIG+12)
00091 #endif
00092 #ifndef SIGHUP
00093 #define SIGHUP (NSIG+13)
00094 #endif
00095 #ifndef SIGALRM
00096 #define SIGALRM (NSIG+14)
```

```

00097 #endif
00098 #ifndef SIGVTALRM
00099 #define SIGVTALRM (NSIG+15)
00100 #endif
00101 #ifndef SIGPROF
00102 #define SIGPROF (NSIG+16)
00103 #endif
00104
00105 #endif

```


4.115 pre.c File Reference

```

#include "form3.h"
#include "comtool.h"
#include "vector.h"

```

Include dependency graph for pre.c:

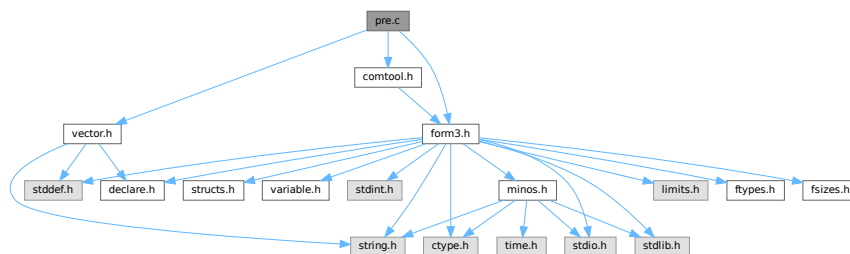

Macros

- #define [STRINGIFY](#)(x) [STRINGIFY__](#)(x)
- #define [STRINGIFY__](#)(x) #x
- #define [SKIPBUFSIZE](#) 20
- #define [KILL](#) "kill"
- #define [KILLALL](#) "killall"
- #define [DAEMON](#) "daemon"
- #define [SHELL](#) "shell"
- #define [STDERR](#) "stderr"
- #define [TRUE_EXPR](#) "true"
- #define [FALSE_EXPR](#) "false"
- #define [NOSHELL](#) "noshell"
- #define [TERMINAL](#) "terminal"

Functions

- UBYTE [GetInput](#) (void)
- void [ClearPushback](#) (void)
- UBYTE [GetChar](#) (int level)
- void [CharOut](#) (UBYTE c)
- void [UnsetAllowDelay](#) (void)
- UBYTE * [GetPreVar](#) (UBYTE *name, int flag)
- int [PutPreVar](#) (UBYTE *name, UBYTE *value, UBYTE *args, int mode)
- void [PopPreVars](#) (int tonumber)

- void [IniModule](#) (int type)
- void [IniSpecialModule](#) (int type)
- void [PreProcessor](#) (void)
- int [PreProInstruction](#) (void)
- int [LoadInstruction](#) (int mode)
- int [LoadStatement](#) (int type)
- int [ExpandTripleDots](#) (int par)
- [KEYWORD](#) * [FindKeyWord](#) (UBYTE *theword, [KEYWORD](#) *table, int size)
- [KEYWORD](#) * [FindInKeyWord](#) (UBYTE *theword, [KEYWORD](#) *table, int size)
- int [TheDefine](#) (UBYTE *s, int mode)
- int [DoCommentChar](#) (UBYTE *s)
- int [DoPreAssign](#) (UBYTE *s)
- int [DoDefine](#) (UBYTE *s)
- int [DoRedefine](#) (UBYTE *s)
- int [ClearMacro](#) (UBYTE *name)
- int [TheUndefine](#) (UBYTE *name)
- int [DoUndefine](#) (UBYTE *s)
- int [DoInclude](#) (UBYTE *s)
- int [DoReverseInclude](#) (UBYTE *s)
- int [Include](#) (UBYTE *s, int type)
- int [DoPreExchange](#) (UBYTE *s)
- int [DoCall](#) (UBYTE *s)
- int [DoDebug](#) (UBYTE *s)
- int [DoTerminate](#) (UBYTE *s)
- int [DoContinueDo](#) (UBYTE *s)
- int [DoDo](#) (UBYTE *s)
- int [DoBreakDo](#) (UBYTE *s)
- int [DoElse](#) (UBYTE *s)
- int [DoElseif](#) (UBYTE *s)
- int [DoEnddo](#) (UBYTE *s)
- int [DoEndif](#) (UBYTE *s)
- int [DoEndprocedure](#) (UBYTE *s)
- int [Dolf](#) (UBYTE *s)
- int [Dolfdef](#) (UBYTE *s, int par)
- int [Dolfydef](#) (UBYTE *s)
- int [Dolfndef](#) (UBYTE *s)
- int [DoInside](#) (UBYTE *s)
- int [DoEndInside](#) (UBYTE *s)
- int [DoMessage](#) (UBYTE *s)
- int [DoPipe](#) (UBYTE *s)
- int [DoProcExtension](#) (UBYTE *s)
- int [DoPreOut](#) (UBYTE *s)
- int [DoPrePrintTimes](#) (UBYTE *s)
- int [DoPreSortReallocate](#) (UBYTE *s)
- int [DoPreAppend](#) (UBYTE *s)
- int [DoPreCreate](#) (UBYTE *s)
- int [DoPreRemove](#) (UBYTE *s)
- int [DoPreClose](#) (UBYTE *s)
- int [DoPreWrite](#) (UBYTE *s)
- int [DoProcedure](#) (UBYTE *s)
- int [DoPreBreak](#) (UBYTE *s)
- int [DoPreCase](#) (UBYTE *s)
- int [DoPreDefault](#) (UBYTE *s)
- int [DoPreEndSwitch](#) (UBYTE *s)
- int [DoPreSwitch](#) (UBYTE *s)

- int [DoPreShow](#) (UBYTE *s)
- int [DoSystem](#) (UBYTE *s)
- int [PreLoad](#) ([PRELOAD](#) *p, UBYTE *start, UBYTE *stop, int mode, char *message)
- int [PreSkip](#) (UBYTE *start, UBYTE *stop, int mode)
- void [StartPrepro](#) (void)
- int [EvalPrelf](#) (UBYTE *s)
- UBYTE * [PrelfEval](#) (UBYTE *s, int *value)
- int [PreCmp](#) (int type, int val, UBYTE *t, int type2, int val2, UBYTE *t2, int cmpop)
- int [PreEq](#) (int type, int val, UBYTE *t, int type2, int val2, UBYTE *t2, int eqop)
- UBYTE * [pParseObject](#) (UBYTE *s, int *type, LONG *val2)
- UBYTE * [PreCalc](#) (void)
- UBYTE * [PreEval](#) (UBYTE *s, LONG *x)
- void [AddToPreTypes](#) (int type)
- void [MessPreNesting](#) (int par)
- int [DoPreAddSeparator](#) (UBYTE *s)
- int [DoPreRmSeparator](#) (UBYTE *s)
- int [DoExternal](#) (UBYTE *s)
- int [DoPrompt](#) (UBYTE *s)
- int [DoSetExternal](#) (UBYTE *s)
- int [DoSetExternalAttr](#) (UBYTE *s)
- int [DoRmExternal](#) (UBYTE *s)
- int [DoFromExternal](#) (UBYTE *s)
- int [DoToExternal](#) (UBYTE *s)
- UBYTE * [defineChannel](#) (UBYTE *s, [HANDLERS](#) *h)
- int [writeToChannel](#) (int wtype, UBYTE *s, [HANDLERS](#) *h)
- int [DoFactDollar](#) (UBYTE *s)
- WORD [GetDollarNumber](#) (UBYTE **inp, [DOLLARS](#) d)
- int [DoSetRandom](#) (UBYTE *s)
- int [DoOptimize](#) (UBYTE *s)
- int [DoClearOptimize](#) (UBYTE *s)
- int [DoSkipExtraSymbols](#) (UBYTE *s)
- int [DoPreReset](#) (UBYTE *s)
- int [DoPreAppendPath](#) (UBYTE *s)
- int [DoPrePrependPath](#) (UBYTE *s)
- int [DoTimeOutAfter](#) (UBYTE *s)
- int [DoNamespace](#) (UBYTE *s)
- int [DoEndNamespace](#) (UBYTE *s)
- UBYTE * [SkipName](#) (UBYTE *s)
- UBYTE * [ConstructName](#) (UBYTE *s, UBYTE type)
- int [DoUse](#) (UBYTE *s)
- int [UserFlags](#) (UBYTE *s, int par)
- int [DoClearUserFlag](#) (UBYTE *s)
- int [DoSetUserFlag](#) (UBYTE *s)

4.115.1 Detailed Description

This is the preprocessor and all its routines.

Definition in file [pre.c](#).

4.115.2 Macro Definition Documentation

4.115.2.1 STRINGIFY

```
#define STRINGIFY(  
    x ) STRINGIFY__(x)
```

Definition at line 4329 of file [pre.c](#).

4.115.2.2 STRINGIFY__

```
#define STRINGIFY__(  
    x ) #x
```

Definition at line 4330 of file [pre.c](#).

4.115.2.3 SKIPBUFSIZE

```
#define SKIPBUFSIZE 20
```

Definition at line 4453 of file [pre.c](#).

4.115.2.4 KILL

```
#define KILL "kill"
```

Definition at line 5673 of file [pre.c](#).

4.115.2.5 KILLALL

```
#define KILLALL "killall"
```

Definition at line 5674 of file [pre.c](#).

4.115.2.6 DAEMON

```
#define DAEMON "daemon"
```

Definition at line 5675 of file [pre.c](#).

4.115.2.7 SHELL

```
#define SHELL "shell"
```

Definition at line 5676 of file [pre.c](#).

4.115.2.8 STDERR

```
#define STDERR "stderr"
```

Definition at line 5677 of file [pre.c](#).

4.115.2.9 TRUE_EXPR

```
#define TRUE_EXPR "true"
```

Definition at line 5679 of file [pre.c](#).

4.115.2.10 FALSE_EXPR

```
#define FALSE_EXPR "false"
```

Definition at line 5680 of file [pre.c](#).

4.115.2.11 NOSHELL

```
#define NOSHELL "noshell"
```

Definition at line 5681 of file [pre.c](#).

4.115.2.12 TERMINAL

```
#define TERMINAL "terminal"
```

Definition at line 5682 of file [pre.c](#).

4.115.3 Function Documentation

4.115.3.1 GetInput()

```
UBYTE GetInput (  
    void )
```

Definition at line 138 of file [pre.c](#).

4.115.3.2 ClearPushback()

```
void ClearPushback (  
    void )
```

Definition at line 167 of file [pre.c](#).

4.115.3.3 GetChar()

```
UBYTE GetChar (
    int level )
```

Definition at line 185 of file [pre.c](#).

4.115.3.4 CharOut()

```
void CharOut (
    UBYTE c )
```

Definition at line 495 of file [pre.c](#).

4.115.3.5 UnsetAllowDelay()

```
void UnsetAllowDelay (
    void )
```

Definition at line 516 of file [pre.c](#).

4.115.3.6 GetPreVar()

```
UBYTE * GetPreVar (
    UBYTE * name,
    int flag )
```

Definition at line 542 of file [pre.c](#).

4.115.3.7 PutPreVar()

```
int PutPreVar (
    UBYTE * name,
    UBYTE * value,
    UBYTE * args,
    int mode )
```

Inserts/Updates a preprocessor variable in the name administration.

Parameters

<i>name</i>	Character string with the variable name.
<i>value</i>	Character string with a possible value. Special case: if this argument is zero, then we have no value. Note: This is different from having an empty argument! This should only occur when the name starts with a ?
<i>args</i>	Character string with possible arguments.
<i>mode</i>	=0: always create a new name entry, =1: try to do a redefinition if possible.

Returns

Index of used entry in name list.

Definition at line 724 of file [pre.c](#).

Referenced by [ClearOptimize\(\)](#), [Generator\(\)](#), [Optimize\(\)](#), [PF_BroadcastRedefinedPreVars\(\)](#), [StartVariables\(\)](#), and [TheDefine\(\)](#).

4.115.3.8 PopPreVars()

```
void PopPreVars (
    int tonumber )
```

Definition at line 826 of file [pre.c](#).

4.115.3.9 IniModule()

```
void IniModule (
    int type )
```

Definition at line 841 of file [pre.c](#).

4.115.3.10 IniSpecialModule()

```
void IniSpecialModule (
    int type )
```

Definition at line 943 of file [pre.c](#).

4.115.3.11 PreProcessor()

```
void PreProcessor (
    void )
```

Definition at line 953 of file [pre.c](#).

4.115.3.12 PreProInstruction()

```
int PreProInstruction (
    void )
```

Definition at line 1172 of file [pre.c](#).

4.115.3.13 LoadInstruction()

```
int LoadInstruction (
    int mode )
```

Definition at line 1260 of file [pre.c](#).

4.115.3.14 LoadStatement()

```
int LoadStatement (
    int type )
```

Definition at line 1463 of file [pre.c](#).

4.115.3.15 ExpandTripleDots()

```
int ExpandTripleDots (
    int par )
```

Definition at line 1601 of file [pre.c](#).

4.115.3.16 FindKeyWord()

```
KEYWORD * FindKeyWord (
    UBYTE * theword,
    KEYWORD * table,
    int size )
```

Definition at line 1969 of file [pre.c](#).

4.115.3.17 FindInKeyWord()

```
KEYWORD * FindInKeyWord (
    UBYTE * theword,
    KEYWORD * table,
    int size )
```

Definition at line 2000 of file [pre.c](#).

4.115.3.18 TheDefine()

```
int TheDefine (
    UBYTE * s,
    int mode )
```

Preprocessor assignment. Possible arguments and values are treated and the new preprocessor variable is put into the name administration.

Parameters

<i>s</i>	Pointer to the character string following the preprocessor command.
<i>mode</i>	Bitmask. 0-bit clear: always create a new name entry, 0-bit set: try to redefine an existing name, 1-bit set: ignore preprocessor if/switch status.

Returns

zero: no errors, negative number: errors.

Definition at line 2030 of file [pre.c](#).

References [PutPreVar\(\)](#).

Here is the call graph for this function:

**4.115.3.19 DoCommentChar()**

```
int DoCommentChar (  
    UBYTE * s )
```

Definition at line 2103 of file [pre.c](#).

4.115.3.20 DoPreAssign()

```
int DoPreAssign (  
    UBYTE * s )
```

Definition at line 2134 of file [pre.c](#).

4.115.3.21 DoDefine()

```
int DoDefine (  
    UBYTE * s )
```

Definition at line 2165 of file [pre.c](#).

4.115.3.22 DoRedefine()

```
int DoRedefine (  
    UBYTE * s )
```

Definition at line 2175 of file [pre.c](#).

4.115.3.23 ClearMacro()

```
int ClearMacro (
    UBYTE * name )
```

Definition at line 2187 of file [pre.c](#).

4.115.3.24 TheUndefine()

```
int TheUndefine (
    UBYTE * name )
```

Definition at line 2215 of file [pre.c](#).

4.115.3.25 DoUndefine()

```
int DoUndefine (
    UBYTE * s )
```

Definition at line 2269 of file [pre.c](#).

4.115.3.26 DoInclude()

```
int DoInclude (
    UBYTE * s )
```

Definition at line 2321 of file [pre.c](#).

4.115.3.27 DoReverseInclude()

```
int DoReverseInclude (
    UBYTE * s )
```

Definition at line 2328 of file [pre.c](#).

4.115.3.28 Include()

```
int Include (
    UBYTE * s,
    int type )
```

Definition at line 2335 of file [pre.c](#).

4.115.3.29 DoPreExchange()

```
int DoPreExchange (
    UBYTE * s )
```

Definition at line 2496 of file [pre.c](#).

4.115.3.30 DoCall()

```
int DoCall (
    UBYTE * s )
```

Definition at line 2557 of file [pre.c](#).

4.115.3.31 DoDebug()

```
int DoDebug (
    UBYTE * s )
```

Definition at line 2729 of file [pre.c](#).

4.115.3.32 DoTerminate()

```
int DoTerminate (
    UBYTE * s )
```

Definition at line 2766 of file [pre.c](#).

4.115.3.33 DoContinueDo()

```
int DoContinueDo (
    UBYTE * s )
```

Jumps forward to the corresponding `#enddo` of the specified number of outer `#do` loops.

Syntax:

```
#continuedo [<number>=1]
```

If `number` is omitted, it defaults to 1. If `number` is zero then the instruction has no effect.

Definition at line 2800 of file [pre.c](#).

4.115.3.34 DoDo()

```
int DoDo (
    UBYTE * s )
```

Definition at line 2864 of file [pre.c](#).

4.115.3.35 DoBreakDo()

```
int DoBreakDo (
    UBYTE * s )
```

Definition at line 3079 of file [pre.c](#).

4.115.3.36 DoElse()

```
int DoElse (
    UBYTE * s )
```

Definition at line 3157 of file [pre.c](#).

4.115.3.37 DoElseif()

```
int DoElseif (
    UBYTE * s )
```

Definition at line 3194 of file [pre.c](#).

4.115.3.38 DoEnddo()

```
int DoEnddo (
    UBYTE * s )
```

Definition at line 3229 of file [pre.c](#).

4.115.3.39 DoEndif()

```
int DoEndif (
    UBYTE * s )
```

Definition at line 3375 of file [pre.c](#).

4.115.3.40 DoEndprocedure()

```
int DoEndprocedure (
    UBYTE * s )
```

Definition at line 3403 of file [pre.c](#).

4.115.3.41 Dolf()

```
int DoIf (
    UBYTE * s )
```

Definition at line 3430 of file [pre.c](#).

4.115.3.42 Dolfdef()

```
int DoIfdef (
    UBYTE * s,
    int par )
```

Definition at line 3454 of file [pre.c](#).

4.115.3.43 Dofydef()

```
int Dofydef (
    UBYTE * s )
```

Definition at line [3479](#) of file [pre.c](#).

4.115.3.44 Dofndef()

```
int Dofndef (
    UBYTE * s )
```

Definition at line [3489](#) of file [pre.c](#).

4.115.3.45 DoInside()

```
int DoInside (
    UBYTE * s )
```

Definition at line [3514](#) of file [pre.c](#).

4.115.3.46 DoEndInside()

```
int DoEndInside (
    UBYTE * s )
```

Definition at line [3607](#) of file [pre.c](#).

4.115.3.47 DoMessage()

```
int DoMessage (
    UBYTE * s )
```

Definition at line [3739](#) of file [pre.c](#).

4.115.3.48 DoPipe()

```
int DoPipe (
    UBYTE * s )
```

Definition at line [3753](#) of file [pre.c](#).

4.115.3.49 DoPrExtension()

```
int DoPrExtension (
    UBYTE * s )
```

Definition at line [3776](#) of file [pre.c](#).

4.115.3.50 DoPreOut()

```
int DoPreOut (
    UBYTE * s )
```

Definition at line [3810](#) of file [pre.c](#).

4.115.3.51 DoPrePrintTimes()

```
int DoPrePrintTimes (
    UBYTE * s )
```

Definition at line [3833](#) of file [pre.c](#).

4.115.3.52 DoPreSortReallocate()

```
int DoPreSortReallocate (
    UBYTE * s )
```

Definition at line [3847](#) of file [pre.c](#).

4.115.3.53 DoPreAppend()

```
int DoPreAppend (
    UBYTE * s )
```

Definition at line [3867](#) of file [pre.c](#).

4.115.3.54 DoPreCreate()

```
int DoPreCreate (
    UBYTE * s )
```

Definition at line [3910](#) of file [pre.c](#).

4.115.3.55 DoPreRemove()

```
int DoPreRemove (
    UBYTE * s )
```

Definition at line [3950](#) of file [pre.c](#).

4.115.3.56 DoPreClose()

```
int DoPreClose (
    UBYTE * s )
```

Definition at line [3983](#) of file [pre.c](#).

4.115.3.57 DoPreWrite()

```
int DoPreWrite (
    UBYTE * s )
```

Definition at line [4027](#) of file [pre.c](#).

4.115.3.58 DoProcedure()

```
int DoProcedure (
    UBYTE * s )
```

Definition at line [4068](#) of file [pre.c](#).

4.115.3.59 DoPreBreak()

```
int DoPreBreak (
    UBYTE * s )
```

Definition at line [4125](#) of file [pre.c](#).

4.115.3.60 DoPreCase()

```
int DoPreCase (
    UBYTE * s )
```

Definition at line [4149](#) of file [pre.c](#).

4.115.3.61 DoPreDefault()

```
int DoPreDefault (
    UBYTE * s )
```

Definition at line [4188](#) of file [pre.c](#).

4.115.3.62 DoPreEndSwitch()

```
int DoPreEndSwitch (
    UBYTE * s )
```

Definition at line [4212](#) of file [pre.c](#).

4.115.3.63 DoPreSwitch()

```
int DoPreSwitch (
    UBYTE * s )
```

Definition at line [4239](#) of file [pre.c](#).

4.115.3.64 DoPreShow()

```
int DoPreShow (
    UBYTE * s )
```

Definition at line [4293](#) of file [pre.c](#).

4.115.3.65 DoSystem()

```
int DoSystem (
    UBYTE * s )
```

Definition at line [4332](#) of file [pre.c](#).

4.115.3.66 PreLoad()

```
int PreLoad (
    PRELOAD * p,
    UBYTE * start,
    UBYTE * stop,
    int mode,
    char * message )
```

Definition at line [4372](#) of file [pre.c](#).

4.115.3.67 PreSkip()

```
int PreSkip (
    UBYTE * start,
    UBYTE * stop,
    int mode )
```

Definition at line [4455](#) of file [pre.c](#).

4.115.3.68 StartPrepro()

```
void StartPrepro (
    void )
```

Definition at line [4510](#) of file [pre.c](#).

4.115.3.69 EvalPrelf()

```
int EvalPreIf (
    UBYTE * s )
```

Definition at line [4538](#) of file [pre.c](#).

4.115.3.70 PreIfEval()

```
UBYTE * PreIfEval (
    UBYTE * s,
    int * value )
```

Definition at line [4573](#) of file [pre.c](#).

4.115.3.71 PreCmp()

```
int PreCmp (
    int type,
    int val,
    UBYTE * t,
    int type2,
    int val2,
    UBYTE * t2,
    int cmpop )
```

Definition at line [4702](#) of file [pre.c](#).

4.115.3.72 PreEq()

```
int PreEq (
    int type,
    int val,
    UBYTE * t,
    int type2,
    int val2,
    UBYTE * t2,
    int eqop )
```

Definition at line [4726](#) of file [pre.c](#).

4.115.3.73 pParseObject()

```
UBYTE * pParseObject (
    UBYTE * s,
    int * type,
    LONG * val2 )
```

Definition at line [4755](#) of file [pre.c](#).

4.115.3.74 PreCalc()

```
UBYTE * PreCalc (
    void )
```

Definition at line [5191](#) of file [pre.c](#).

4.115.3.75 PreEval()

```
UBYTE * PreEval (  
    UBYTE * s,  
    LONG * x )
```

Definition at line 5269 of file [pre.c](#).

4.115.3.76 AddToPreTypes()

```
void AddToPreTypes (  
    int type )
```

Definition at line 5419 of file [pre.c](#).

4.115.3.77 MessPreNesting()

```
void MessPreNesting (  
    int par )
```

Definition at line 5437 of file [pre.c](#).

4.115.3.78 DoPreAddSeparator()

```
int DoPreAddSeparator (  
    UBYTE * s )
```

Definition at line 5460 of file [pre.c](#).

4.115.3.79 DoPreRmSeparator()

```
int DoPreRmSeparator (  
    UBYTE * s )
```

Definition at line 5485 of file [pre.c](#).

4.115.3.80 DoExternal()

```
int DoExternal (  
    UBYTE * s )
```

Definition at line 5502 of file [pre.c](#).

4.115.3.81 DoPrompt()

```
int DoPrompt (  
    UBYTE * s )
```

Definition at line 5584 of file [pre.c](#).

4.115.3.82 DoSetExternal()

```
int DoSetExternal (
    UBYTE * s )
```

Definition at line 5617 of file [pre.c](#).

4.115.3.83 DoSetExternalAttr()

```
int DoSetExternalAttr (
    UBYTE * s )
```

Definition at line 5687 of file [pre.c](#).

4.115.3.84 DoRmExternal()

```
int DoRmExternal (
    UBYTE * s )
```

Definition at line 5804 of file [pre.c](#).

4.115.3.85 DoFromExternal()

```
int DoFromExternal (
    UBYTE * s )
```

Definition at line 5869 of file [pre.c](#).

4.115.3.86 DoToExternal()

```
int DoToExternal (
    UBYTE * s )
```

Definition at line 6064 of file [pre.c](#).

4.115.3.87 defineChannel()

```
UBYTE * defineChannel (
    UBYTE * s,
    HANDLERS * h )
```

Definition at line 6111 of file [pre.c](#).

4.115.3.88 writeToChannel()

```
int writeToChannel (
    int wtype,
    UBYTE * s,
    HANDLERS * h )
```

Definition at line 6146 of file [pre.c](#).

4.115.3.89 DoFactDollar()

```
int DoFactDollar (
    UBYTE * s )
```

Definition at line 6711 of file [pre.c](#).

4.115.3.90 GetDollarNumber()

```
WORD GetDollarNumber (
    UBYTE ** inp,
    DOLLARS d )
```

Definition at line 6748 of file [pre.c](#).

4.115.3.91 DoSetRandom()

```
int DoSetRandom (
    UBYTE * s )
```

Definition at line 6838 of file [pre.c](#).

4.115.3.92 DoOptimize()

```
int DoOptimize (
    UBYTE * s )
```

Definition at line 6881 of file [pre.c](#).

4.115.3.93 DoClearOptimize()

```
int DoClearOptimize (
    UBYTE * s )
```

Definition at line 7014 of file [pre.c](#).

4.115.3.94 DoSkipExtraSymbols()

```
int DoSkipExtraSymbols (
    UBYTE * s )
```

Definition at line 7034 of file [pre.c](#).

4.115.3.95 DoPreReset()

```
int DoPreReset (
    UBYTE * s )
```

Definition at line 7073 of file [pre.c](#).

4.115.3.96 DoPreAppendPath()

```
int DoPreAppendPath (
    UBYTE * s )
```

Appends the given path (absolute or relative to the current file directory) to the FORM path.

Syntax: #appendpath <path>

Definition at line 7231 of file [pre.c](#).

4.115.3.97 DoPrePrependPath()

```
int DoPrePrependPath (
    UBYTE * s )
```

Prepends the given path (absolute or relative to the current file directory) to the FORM path.

Syntax: #prependpath <path>

Definition at line 7248 of file [pre.c](#).

4.115.3.98 DoTimeOutAfter()

```
int DoTimeOutAfter (
    UBYTE * s )
```

Definition at line 7260 of file [pre.c](#).

4.115.3.99 DoNamespace()

```
int DoNamespace (
    UBYTE * s )
```

Definition at line 7312 of file [pre.c](#).

4.115.3.100 DoEndNamespace()

```
int DoEndNamespace (
    UBYTE * s )
```

Definition at line 7360 of file [pre.c](#).

4.115.3.101 SkipName()

```
UBYTE * SkipName (
    UBYTE * s )
```

Definition at line 7383 of file [pre.c](#).

4.115.3.102 ConstructName()

```
UBYTE * ConstructName (  
    UBYTE * s,  
    UBYTE type )
```

Definition at line [7483](#) of file [pre.c](#).

4.115.3.103 DoUse()

```
int DoUse (  
    UBYTE * s )
```

Definition at line [7575](#) of file [pre.c](#).

4.115.3.104 UserFlags()

```
int UserFlags (  
    UBYTE * s,  
    int par )
```

Definition at line [7623](#) of file [pre.c](#).

4.115.3.105 DoClearUserFlag()

```
int DoClearUserFlag (  
    UBYTE * s )
```

Definition at line [7730](#) of file [pre.c](#).

4.115.3.106 DoSetUserFlag()

```
int DoSetUserFlag (  
    UBYTE * s )
```

Definition at line [7740](#) of file [pre.c](#).

4.116 pre.c

[Go to the documentation of this file.](#)

```

00001
00005 /* #[ License : */
00006 /*
00007 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 *   When using this file you are requested to refer to the publication
00009 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 *   This is considered a matter of courtesy as the development was paid
00011 *   for by FOM the Dutch physics granting agency and we would like to
00012 *   be able to track its scientific use to convince FOM of its value
00013 *   for the community.
00014 *
00015 *   This file is part of FORM.
00016 *
00017 *   FORM is free software: you can redistribute it and/or modify it under the
00018 *   terms of the GNU General Public License as published by the Free Software
00019 *   Foundation, either version 3 of the License, or (at your option) any later
00020 *   version.
00021 *
00022 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 *   details.
00026 *
00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #] License : */
00031 /*
00032     #[ Includes :
00033 */
00034 #include "form3.h"
00035 #include "comtool.h"
00036 #ifdef WITHFLOAT
00037 #include "math.h"
00038 #endif
00039
00040 static UBYTE pushbackchar = 0;
00041 static int oldmode = 0;
00042 static int stopdelay = 0;
00043 static STREAM *oldstream = 0;
00044 static UBYTE underscore[2] = {'_', 0};
00045 static PREVAR *ThePreVar = 0;
00046
00047 static int ExitDoLoops(int, const char *);
00048
00049 static KEYWORD precommands[] = {
00050     {"add" , DoPreAdd , 0, 0}
00051     , {"addseparator" , DoPreAddSeparator, 0, 0}
00052     , {"append" , DoPreAppend , 0, 0}
00053     , {"appendpath" , DoPreAppendPath, 0, 0}
00054     , {"assign" , DoPreAssign , 0, 0}
00055     , {"break" , DoPreBreak , 0, 0}
00056     , {"breakdo" , DoBreakDo , 0, 0}
00057     , {"call" , DoCall , 0, 0}
00058     , {"case" , DoPreCase , 0, 0}
00059     , {"clearflag" , DoClearUserFlag, 0, 0}
00060     , {"clearoptimize", DoClearOptimize, 0, 0}
00061     , {"close" , DoPreClose , 0, 0}
00062     , {"closedictionary", DoPreCloseDictionary, 0, 0}
00063     , {"commentchar" , DoCommentChar , 0, 0}
00064     , {"continuedo" , DoContinueDo , 0, 0}
00065     , {"create" , DoPreCreate , 0, 0}
00066     , {"debug" , DoDebug , 0, 0}
00067     , {"default" , DoPreDefault , 0, 0}
00068     , {"define" , DoDefine , 0, 0}
00069     , {"do" , DoDo , 0, 0}
00070     , {"else" , DoElse , 0, 0}
00071     , {"elseif" , DoElseif , 0, 0}
00072     , {"enddo" , DoEnddo , 0, 0}
00073 #ifdef WITHFLOAT
00074     , {"endfloat" , DoEndFloat , 0, 0}
00075 #endif
00076     , {"endif" , DoEndif , 0, 0}
00077     , {"endinside" , DoEndInside , 0, 0}
00078     , {"endnamespace" , DoEndNamespace , 0, 0}
00079     , {"endprocedure" , DoEndprocedure , 0, 0}
00080     , {"endswitch" , DoPreEndSwitch , 0, 0}
00081     , {"exchange" , DoPreExchange , 0, 0}
00082     , {"external" , DoExternal , 0, 0}
00083     , {"factdollar" , DoFactDollar , 0, 0}
00084     , {"fromexternal" , DoFromExternal , 0, 0}
00085     , {"if" , DoIf , 0, 0}

```

```

00086     ,{"ifdef"           , DoIfydef           , 0, 0}
00087     ,{"ifndef"          , DoIfndef          , 0, 0}
00088     ,{"include"          , DoInclude          , 0, 0}
00089     ,{"inside"           , DoInside           , 0, 0}
00090     ,{"message"          , DoMessage          , 0, 0}
00091     ,{"namespace"        , DoNamespace        , 0, 0}
00092     ,{"opendictionary"   , DoPreOpenDictionary,0,0}
00093     ,{"optimize"         , DoOptimize         , 0, 0}
00094     ,{"pipe"             , DoPipe             , 0, 0}
00095     ,{"preout"           , DoPreOut           , 0, 0}
00096     ,{"prependpath"      , DoPrePrependPath,0,0}
00097     ,{"printtimes"       , DoPrePrintTimes    , 0, 0}
00098     ,{"procedure"        , DoProcedure         , 0, 0}
00099     ,{"procedureextension", DoPrceExtension    , 0, 0}
00100     ,{"prompt"           , DoPrompt           , 0, 0}
00101     ,{"redefine"         , DoRedefine         , 0, 0}
00102     ,{"remove"           , DoPreRemove        , 0, 0}
00103     ,{"reset"            , DoPreReset         , 0, 0}
00104     ,{"reverseinclude"   , DoReverseInclude   , 0, 0}
00105     ,{"rmexternal"       , DoRmExternal       , 0, 0}
00106     ,{"rmseparator"      , DoPreRmSeparator,0,0}
00107     ,{"setexternal"      , DoSetExternal      , 0, 0}
00108     ,{"setexternalattr"  , DoSetExternalAttr  , 0, 0}
00109     ,{"setflag"          , DoSetUserFlag      , 0, 0}
00110     ,{"setrandom"        , DoSetRandom        , 0, 0}
00111     ,{"show"             , DoPreShow          , 0, 0}
00112     ,{"skipextrasymbols" , DoSkipExtraSymbols , 0, 0}
00113     ,{"sortreallocate"   , DoPreSortReallocate , 0, 0}
00114     #ifdef WITHFLOAT
00115     ,{"startfloat"       , DoStartFloat       , 0, 0}
00116     #endif
00117     ,{"switch"           , DoPreSwitch        , 0, 0}
00118     ,{"system"           , DoSystem            , 0, 0}
00119     ,{"terminate"        , DoTerminate         , 0, 0}
00120     ,{"timeoutafter"     , DoTimeOutAfter     , 0, 0}
00121     ,{"toexternal"       , DoToExternal        , 0, 0}
00122     ,{"undefine"         , DoUndefine         , 0, 0}
00123     ,{"use"              , DoUse              , 0, 0}
00124     ,{"usedictionary"    , DoPreUseDictionary,0,0}
00125     ,{"write"            , DoPreWrite         , 0, 0}
00126 };
00127
00128 /*
00129     #] Includes :
00130     # [ PreProcessor :
00131         #[ GetInput :
00132
00133         Gets one input character. If we reach the end of a stream
00134         we pop to the previous stream and try again.
00135         If there are no more streams we let this be known.
00136     */
00137
00138 UBYTE GetInput(void)
00139 {
00140     UBYTE c;
00141     while ( AC.CurrentStream ) {
00142         c = GetFromStream(AC.CurrentStream);
00143         if ( c != ENDOFSTREAM ) {
00144             #ifdef WITHMPI
00145                 if ( PF.me == MASTER
00146                     && AC.NoShowInput <= 0
00147                     && AC.CurrentStream->type != PREVARSTREAM )
00148             #else
00149                 if ( AC.NoShowInput <= 0 && AC.CurrentStream->type != PREVARSTREAM )
00150             #endif
00151                 CharOut(c);
00152                 return(c);
00153             }
00154             AC.CurrentStream = CloseStream(AC.CurrentStream);
00155             if ( stopdelay && AC.CurrentStream == oldstream ) {
00156                 stopdelay = 0; AP.AllowDelay = 1;
00157             }
00158         }
00159         return(ENDOFINPUT);
00160     }
00161
00162     /*
00163         #] GetInput :
00164         #[ ClearPushback :
00165     */
00166
00167 void ClearPushback(void)
00168 {
00169     pushbackchar = 0;
00170 }
00171
00172 /*

```

```

00173      #] ClearPushback :
00174      #[ GetChar :
00175
00176      Reads one character. If it encounters a quote it immediately
00177      takes the whole preprocessor variable and opens a stream
00178      for it and starts reading the stream.
00179      Note that we have to take special precautions for escaped quotes.
00180      That is why we remember the previous character. We allow the
00181      (dubious?) construction of ending a stream with a backslash and
00182      then using it to escape an object in the parent stream.
00183  */
00184
00185  UBYTE GetChar(int level)
00186  {
00187      UBYTE namebuf[MAXPRENAMESIZE+2], c, *s, *t;
00188      static UBYTE lastchar, charinbuf = 0;
00189      int i, j, raiselow, olddelay;
00190      STREAM *stream;
00191      if ( level > 0 ) {
00192          lastchar = '';
00193          goto higherlevel;
00194      }
00195      if ( pushbackchar ) { c = pushbackchar; pushbackchar = 0; return(c); }
00196      if ( charinbuf ) { c = charinbuf; charinbuf = 0; return(c); }
00197      c = GetInput();
00198      for(;;) {
00199          if ( c == '\\\\' ) {
00200              charinbuf = GetInput();
00201              if ( charinbuf != LINEFEED ) {
00202                  pushbackchar = charinbuf;
00203                  charinbuf = 0;
00204                  break;
00205              }
00206              charinbuf = 0; /* Escaped linefeed -> skip leading blanks */
00207              while ( ( c = GetInput() ) == ' ' || c == '\t' ) {}
00208          }
00209          else if ( c == '\"' || c == '\'' ) {
00210              if ( AP.DelayPrevar == 1 && c == '\"' ) {
00211                  AP.DelayPrevar = 0;
00212                  break;
00213              }
00214              lastchar = c;
00215              higherlevel:
00216              c = GetInput();
00217              if ( c == '!' && lastchar == '\'' ) {
00218                  if ( stopdelay == 0 ) oldstream = AC.CurrentStream;
00219                  AP.AllowDelay = 0;
00220                  stopdelay = 1;
00221                  c = GetInput();
00222              }
00223              if ( c == '~' && lastchar == '\'' ) {
00224                  if ( AP.AllowDelay ) {
00225                      pushbackchar = c;
00226                      c = lastchar;
00227                      AP.DelayPrevar = 1;
00228                      break;
00229                  }
00230              }
00231              else {
00232                  pushbackchar = c;
00233              }
00234              olddelay = AP.DelayPrevar;
00235              AP.DelayPrevar = 0;
00236              i = 0; lastchar = 0;
00237              for(;;) {
00238                  if ( pushbackchar ) { c = pushbackchar; pushbackchar = 0; }
00239                  else { c = GetInput(); }
00240                  if ( c == ENDOFINPUT || ( ( c == '\"' || c == LINEFEED )
00241                      && lastchar != '\\\\' ) ) {
00242                      break;
00243                  }
00244                  if ( c == '{' ) { /* Try the preprocessor calculator */
00245                      if ( PreCalc() == 0 ) Terminate(-1);
00246                      c = GetInput(); /* This is either a { or a number */
00247                      if ( c == '{' ) {
00248                          MesPrint("@Illegal set inside preprocessor variable name");
00249                          Terminate(-1);
00250                      }
00251                  }
00252                  if ( c == '~' && lastchar != '\\\\' ) {
00253                      c = GetChar(1);
00254                      if ( c == ENDOFINPUT || ( ( c == '\"' || c == LINEFEED )
00255                          && lastchar != '\\\\' ) ) {
00256                          break;
00257                      }
00258                  }
00259                  if ( lastchar == '\\\\' ) { i--; lastchar = 0; }

```

```

00260         else lastchar = c;
00261         namebuf[i++] = c;
00262         if ( i > MAXPRENAMESIZE ) {
00263             namebuf[i] = 0;
00264             Error1("Preprocessor variable name too long: ",namebuf);
00265         }
00266     }
00267     namebuf[i++] = 0;
00268     if ( c != '"' ) {
00269         Error1("Unmatched quotes for preprocessor variable",namebuf);
00270     }
00271     AP.DelayPrevar = olddelay;
00272     if ( namebuf[0] == '$' ) {
00273         raiselow = PRENOACTION;
00274         if ( AP.PreproFlag && *AP.preStart ) {
00275             s = EndOfToken(AP.preStart);
00276             c = *s; *s = 0;
00277             if ( ( StrICmp(AP.preStart, (UBYTE *) "ifdef" ) == 0
00278                 || StrICmp(AP.preStart, (UBYTE *) "ifndef" ) == 0 )
00279                 && GetDollar(namebuf+1) < 0 ) {
00280                 *s = c; c = ' ';
00281                 break;
00282             }
00283             *s = c;
00284         }
00285         else {
00286             s = EndOfToken(namebuf+1);
00287             if ( *s == '[' ) { while ( *s ) s++; }
00288         }
00289         if ( *s == '-' && s[1] == '-' && s[2] == 0 )
00290             raiselow = PRELOWERAFTER;
00291         else if ( *s == '+' && s[1] == '+' && s[2] == 0 )
00292             raiselow = PRERAISEAFTER;
00293         c = *s; *s = 0;
00294         if ( OpenStream(namebuf+1,DOLLARSTREAM,0,raiselow) == 0 ) {
00295             *s = c;
00296             MesPrint("@Undefined variable %s used as preprocessor variable",
00297                     namebuf);
00298             Terminate(-1);
00299         }
00300         *s = c;
00301     }
00302     else {
00303         raiselow = PRENOACTION;
00304         if ( AP.PreproFlag && *AP.preStart ) {
00305             s = EndOfToken(AP.preStart);
00306             c = *s; *s = 0;
00307             if ( ( StrICmp(AP.preStart, (UBYTE *) "ifdef" ) == 0
00308                 || StrICmp(AP.preStart, (UBYTE *) "ifndef" ) == 0 )
00309                 && GetPreVar(namebuf,WITHOUTERROR) == 0 ) {
00310                 *s = c; c = ' ';
00311                 break;
00312             }
00313             *s = c;
00314         }
00315         s = EndOfToken(namebuf);
00316         if ( *s == '-' ) s++;
00317         if ( *s == '-' && s[1] == '-' && s[2] == 0 )
00318             raiselow = PRELOWERAFTER;
00319         else if ( *s == '+' && s[1] == '+' && s[2] == 0 )
00320             raiselow = PRERAISEAFTER;
00321         else if ( *s == '(' && namebuf[i-2] == ')' ) {
00322             /*
00323              Now count the arguments and separate them by zeroes
00324              Check on the ?var construction and if present, reset
00325              some comma's.
00326              Make the assignments of the variables
00327              Run the macro.
00328              Undefine the variables
00329             */
00330             int nargs = 1;
00331             PREVAR *p;
00332             size_t p_offset;
00333             *s++ = 0; namebuf[i-2] = 0;
00334             if ( StrICmp(namebuf, (UBYTE *) "random_" ) == 0 ) {
00335                 UBYTE *ranvalue;
00336                 ranvalue = PreRandom(s);
00337                 PutPreVar(namebuf,ranvalue,0,1);
00338                 M_free(ranvalue,"PreRandom");
00339                 goto dostream;
00340             }
00341             else if ( StrICmp(namebuf, (UBYTE *) "tolower_" ) == 0 ) {
00342                 UBYTE *ss = s;
00343                 while ( *ss ) { *ss = (UBYTE)(tolower(*ss)); ss++; }
00344                 PutPreVar(namebuf,s,0,1);
00345                 goto dostream;
00346             }

```

```

00347     else if ( StrICmp(namebuf, (UBYTE *)"toupper_") == 0 ) {
00348         UBYTE *ss = s;
00349         while ( *ss ) { *ss = (UBYTE)(toupper(*ss)); ss++; }
00350         PutPreVar(namebuf,s,0,1);
00351         goto dostream;
00352     }
00353     else if ( StrICmp(namebuf, (UBYTE *)"takeleft_") == 0 ) {
00354         UBYTE *ss = s;
00355         int x = 0, nsize;
00356         while ( *ss != ',' && *ss ) ss++;
00357         nsize = ss-s;
00358         if ( *ss ) {
00359             *ss++ = 0;
00360             while ( FG.cTable[*ss] == 1 ) x = 10*x + (*ss++ - '0');
00361             if ( x > nsize ) x = nsize;
00362         }
00363         else x = 0;
00364         PutPreVar(namebuf,s+x,0,1);
00365         goto dostream;
00366     }
00367     else if ( StrICmp(namebuf, (UBYTE *)"takeright_") == 0 ) {
00368         UBYTE *ss = s;
00369         int x = 0, nsize;
00370         while ( *ss != ',' && *ss ) ss++;
00371         nsize = ss-s;
00372         if ( *ss ) {
00373             *ss++ = 0;
00374             while ( FG.cTable[*ss] == 1 ) x = 10*x + (*ss++ - '0');
00375             if ( x > nsize ) x = nsize;
00376         }
00377         else x = 0;
00378         x = nsize - x;
00379         s[x] = 0;
00380         PutPreVar(namebuf,s,0,1);
00381         goto dostream;
00382     }
00383     else if ( StrICmp(namebuf, (UBYTE *)"keepleft_") == 0 ) {
00384         UBYTE *ss = s;
00385         int x = 0, nsize;
00386         while ( *ss != ',' && *ss ) ss++;
00387         nsize = ss-s;
00388         if ( *ss ) {
00389             *ss++ = 0;
00390             while ( FG.cTable[*ss] == 1 ) x = 10*x + (*ss++ - '0');
00391             if ( x > nsize ) x = nsize;
00392         }
00393         else x = nsize;
00394         s[x] = 0;
00395         PutPreVar(namebuf,s,0,1);
00396         goto dostream;
00397     }
00398     else if ( StrICmp(namebuf, (UBYTE *)"kepright_") == 0 ) {
00399         UBYTE *ss = s;
00400         int x = 0, nsize;
00401         while ( *ss != ',' && *ss ) ss++;
00402         nsize = ss-s;
00403         if ( *ss ) {
00404             *ss++ = 0;
00405             while ( FG.cTable[*ss] == 1 ) x = 10*x + (*ss++ - '0');
00406             if ( x > nsize ) x = nsize;
00407         }
00408         else x = nsize;
00409         x = nsize-x;
00410         PutPreVar(namebuf,s+x,0,1);
00411         goto dostream;
00412     }
00413     while ( *s ) {
00414         if ( *s == '\\\\' ) s++;
00415         if ( *s == ',' ) { *s = 0; nargs++; }
00416         s++;
00417     }
00418     GetPreVar(namebuf,WITHEXCEPTION);
00419     p = ThePreVar;
00420     if ( p == 0 ) {
00421         MesPrint("@Illegal use of arguments in preprocessor variable %s",namebuf);
00422         Terminate(-1);
00423     }
00424     if ( p->nargs <= 0 || ( p->wildarg == 0 && nargs != p->nargs )
00425         || ( p->wildarg > 0 && nargs < p->nargs-1 ) ) {
00426         MesPrint("@Arguments of macro %s do not match",namebuf);
00427         Terminate(-1);
00428     }
00429     if ( p->wildarg > 0 ) {
00430         /*
00431         Change some zeroes into commas
00432         */
00433         s = namebuf;

```

```

00434         for ( j = 0; j < p->wildarg; j++ ) {
00435             while ( *s ) s++;
00436             s++;
00437         }
00438         for ( j = 0; j < nargs-p->nargs; j++ ) {
00439             while ( *s ) s++;
00440             *s++ = ',';
00441         }
00442     }
00443     /*
00444         Now we can make the assignments
00445     */
00446     s = namebuf;
00447     while ( *s ) s++;
00448     s++;
00449     t = p->argnames;
00450     p_offset = p - PreVar;
00451     for ( j = 0; j < p->nargs; j++ ) {
00452         if ( ( nargs == p->nargs-1 ) && ( *t == '?' ) ) {
00453             PutPreVar(t,0,0,0);
00454         }
00455         else {
00456             PutPreVar(t,s,0,0);
00457             while ( *s ) s++;
00458             s++;
00459         }
00460         p = PreVar + p_offset;
00461         while ( *t ) t++;
00462         t++;
00463     }
00464 }
00465 dostream;;
00466     if ( ( stream = OpenStream(namebuf,PREVARSTREAM,0,raiselow) ) == 0 ) {
00467     /*
00468         Eat comma before or after. This is `no value'
00469     */
00470     }
00471     else if ( stream->inbuffer == 0 ) {
00472         c = GetInput();
00473         if ( level > 0 && c == '\\' ) return(c);
00474         goto endofloop;
00475     }
00476 }
00477 c = GetInput();
00478 }
00479 else if ( c == '{' ) { /* Try the preprocessor calculator */
00480     if ( PreCalc() == 0 ) Terminate(-1);
00481     c = GetInput(); /* This is either a { or a number */
00482     break;
00483 }
00484 else break;
00485 endofloop;;
00486 }
00487 return(c);
00488 }
00489
00490 /*
00491     #] GetChar :
00492     #[ CharOut :
00493 */
00494
00495 void CharOut(UBYTE c)
00496 {
00497     if ( c == LINEFEED ) {
00498         AM.OutBuffer[AP.InOutBuf++] = c;
00499         WriteString(INPUTOUT,AM.OutBuffer,AP.InOutBuf);
00500         AP.InOutBuf = 0;
00501     }
00502     else {
00503         if ( AP.InOutBuf >= AM.OutBufSize || c == LINEFEED ) {
00504             WriteString(INPUTOUT,AM.OutBuffer,AP.InOutBuf);
00505             AP.InOutBuf = 0;
00506         }
00507         AM.OutBuffer[AP.InOutBuf++] = c;
00508     }
00509 }
00510
00511 /*
00512     #] CharOut :
00513     #[ UnsetAllowDelay :
00514 */
00515
00516 void UnsetAllowDelay(void)
00517 {
00518     if ( ThePreVar != 0 ) {
00519         if ( ThePreVar->nargs > 0 ) AP.AllowDelay = 0;
00520     }

```



```

00521 }
00522
00523 /*
00524     #] UnsetAllowDelay :
00525     #[ GetPreVar :
00526
00527     We use the model of a heap. If the same name has been used more
00528     than once the last definition is used. This gives the impression
00529     of local variables.
00530
00531     There are two types: The regular ones and the expression variables.
00532     The last ones are like UNCHANGED_exprname and ZERO_exprname or
00533     UNCHANGED_ and ZERO_.
00534 */
00535
00536 static UBYTE *yes = (UBYTE *)"1";
00537 static UBYTE *no = (UBYTE *)"0";
00538 static UBYTE numintopolynomial[12];
00539 #include "vector.h"
00540 static Vector(UBYTE, exprstr); /* Used for numactiveexprs_ and activeexprnames_. */
00541
00542 UBYTE *GetPreVar(UBYTE *name, int flag)
00543 {
00544     GETIDENTITY
00545     int i, mode;
00546     WORD number;
00547     UBYTE *t, c = 0, *tt = 0;
00548     t = name; while ( *t ) t++;
00549     if ( t[-1] == '-' && t[-2] == '-' && t-2 > name && t[-3] != '_' ) {
00550         t -= 2; c = *t; *t = 0; tt = t;
00551     }
00552     else if ( t[-1] == '+' && t[-2] == '+' && t-2 > name && t[-3] != '_' ) {
00553         t -= 2; c = *t; *t = 0; tt = t;
00554     }
00555     else if ( StrICmp(name, (UBYTE *)"time_") == 0 ) {
00556         UBYTE millibuf[24];
00557         LONG millitime, timepart;
00558         int timepart1, timepart2;
00559         static char timestring[40];
00560         /* millitime = TimeCPU(1); */
00561         millitime = GetRunningTime();
00562         timepart = millitime%1000;
00563         millitime /= 1000;
00564         timepart /= 10;
00565         timepart1 = timepart / 10;
00566         timepart2 = timepart % 10;
00567         NumToStr(millibuf, millitime);
00568         snprintf(timestring, 40, "%s.%ld%ld", millibuf, timepart1, timepart2);
00569         return((UBYTE *)timestring);
00570     }
00571     else if ( ( StrICmp(name, (UBYTE *)"timer_") == 0 )
00572         || ( StrICmp(name, (UBYTE *)"stopwatch_") == 0 ) ) ) {
00573         static char timestring[40];
00574         snprintf(timestring, 40, "%ld", (long int)(GetRunningTime() - AP.StopWatchZero));
00575         return((UBYTE *)timestring);
00576     }
00577     else if ( StrICmp(name, (UBYTE *)"numactiveexprs_") == 0 ) {
00578         /* the number of active expressions */
00579         int n = 0;
00580         for ( i = 0; i < NumExpressions; i++ ) {
00581             EXPRESSIONS e = Expressions + i;
00582             switch ( e->status ) {
00583                 case LOCALEXPRESSION:
00584                 case GLOBALEXPRESSION:
00585                 case UNHIDELEXPRESSION:
00586                 case UNHIDEGEXPRESSION:
00587                 case INTOHIDELEXPRESSION:
00588                 case INTOHIDEGEXPRESSION:
00589                     n++;
00590                     break;
00591             }
00592         }
00593         VectorReserve(exprstr, 41); /* up to 128-bit */
00594         LongCopy(n, (char *)VectorPtr(exprstr));
00595         return VectorPtr(exprstr);
00596     }
00597     else if ( StrICmp(name, (UBYTE *)"activeexprnames_") == 0 ) {
00598         /* the list of active expressions separated by commas */
00599         int j = 0;
00600         VectorReserve(exprstr, 16); /* at least 1 character for '\0' */
00601         for ( i = 0; i < NumExpressions; i++ ) {
00602             UBYTE *p, *s;
00603             int len, k;
00604             EXPRESSIONS e = Expressions + i;
00605             switch ( e->status ) {
00606                 case LOCALEXPRESSION:
00607                 case GLOBALEXPRESSION:

```

```

00608         case UNHIDELEXPRESSION:
00609         case UNHIDEGEXPRESSION:
00610         case INTOHIDELEXPRESSION:
00611         case INTOHIDEGEXPRESSION:
00612             s = AC.exprnames->namebuffer + e->name;
00613             len = StrLen(s);
00614             VectorSize(exprstr) = j; /* j bytes must be copied in extending the buffer. */
00615             VectorReserve(exprstr, j + len * 2 + 1);
00616             p = VectorPtr(exprstr);
00617             if ( j > 0 ) p[j++] = ',';
00618             for ( k = 0; k < len; k++ ) {
00619                 if ( s[k] == ',' || s[k] == '|' ) p[j++] = '\\';
00620                 p[j++] = s[k];
00621             }
00622             break;
00623     }
00624 }
00625 VectorPtr(exprstr)[j] = '\\0';
00626 return VectorPtr(exprstr);
00627 }
00628 else if ( StrICmp(name, (UBYTE *) "path_") == 0 ) {
00629     /* the current FORM path (for debugging both in .c and .frm) */
00630     if ( AM.Path ) {
00631         return(AM.Path);
00632     }
00633     else {
00634         return((UBYTE *) "");
00635     }
00636 }
00637 t = name;
00638 while ( *t && *t != '_' ) t++;
00639 for ( i = NumPre-1; i >= 0; i-- ) {
00640     if ( *t == '_' && ( StrICmp(name, PreVar[i].name) == 0 ) ) {
00641         if ( c ) *tt = c;
00642         ThePreVar = PreVar+i;
00643         return(PreVar[i].value);
00644     }
00645     else if ( StrCmp(name, PreVar[i].name) == 0 ) {
00646         if ( c ) *tt = c;
00647         ThePreVar = PreVar+i;
00648         return(PreVar[i].value);
00649     }
00650 }
00651 if ( *t == '_' ) {
00652     if ( StrICmp(name, (UBYTE *) "EXTRASMBOLS_") == 0 ) goto extrashort;
00653     *t = 0;
00654     if ( StrICmp(name, (UBYTE *) "UNCHANGED") == 0 ) mode = 1;
00655     else if ( StrICmp(name, (UBYTE *) "ZERO") == 0 ) mode = 0;
00656     else if ( StrICmp(name, (UBYTE *) "SHOWINPUT") == 0 ) {
00657         *t++ = '_';
00658         if ( c ) *tt = c;
00659         if ( AC.NoShowInput > 0 ) return(no);
00660         else return(yes);
00661     }
00662     else if ( StrICmp(name, (UBYTE *) "EXTRASMBOLS") == 0 ) {
00663         *t++ = '_';
00664 extrashort:;
00665         number = cbuf[AM.sbufnum].numrhs;
00666         t = numintopolynomial;
00667         NumCopy(number, t);
00668         return(numintopolynomial);
00669     }
00670     else mode = -1;
00671     *t++ = '_';
00672     if ( mode >= 0 ) {
00673         ThePreVar = 0;
00674         if ( *t ) {
00675             if ( GetName(AC.exprnames, t, &number, NOAUTO) == CEXPRESSION ) {
00676                 if ( c ) *tt = c;
00677                 if ( ( Expressions[number].vflags & ( 1 « mode ) ) != 0 )
00678                     return(yes);
00679                 else return(no);
00680             }
00681         }
00682         else {
00683             /*
00684              Here we have to test all active results.
00685              These are in 'negative' so the flags have to be zero.
00686             */
00687             if ( c ) *tt = c;
00688             if ( ( AR.expflags & ( 1 « mode ) ) == 0 ) return(yes);
00689             else return(no);
00690         }
00691     }
00692 }
00693 if ( ( t = (UBYTE *) (getenv((char *) (name))) ) != 0 ) {
00694     if ( c ) *tt = c;

```

```

00695     ThePreVar = 0;
00696     return(t);
00697 }
00698 if ( c ) *tt = c;
00699 if ( flag == WITHTERROR ) {
00700     Error1("Undefined preprocessor variable",name);
00701 }
00702 return(0);
00703 }
00704
00705 /*
00706     #] GetPreVar :
00707     #[ PutPreVar :
00708 */
00709
00724 int PutPreVar(UBYTE *name, UBYTE *value, UBYTE *args, int mode)
00725 {
00726     int i, ii, num = 2, nnum = 2, numargs = 0;
00727     UBYTE *s, *t, *u = 0;
00728     PREVAR *p;
00729     if ( value == 0 && name[0] != '?' ) {
00730         MesPrint("@Illegal empty value for preprocessor variable %s",name);
00731         Terminate(-1);
00732     }
00733     if ( args ) {
00734         s = args; num++;
00735         while ( *s ) {
00736             if ( *s != ' ' && *s != '\t' ) num++;
00737             s++;
00738         }
00739     }
00740     if ( mode == 1 ) {
00741         i = NumPre;
00742         while ( --i >= 0 ) {
00743             if ( StrCmp(name,PreVar[i].name) == 0 ) {
00744                 u = PreVar[i].name;
00745                 break;
00746             }
00747         }
00748     }
00749     else i = -1;
00750     if ( i < 0 ) { p = (PREVAR *)FromList(&AP.PreVarList); ii = p - PreVar; }
00751     else { p = &(PreVar[i]); ii = i; }
00752     if ( value ) {
00753         s = value; while ( *s ) { s++; num++; }
00754     }
00755     else num = 1;
00756     if ( i >= 0 ) {
00757         if ( p->value ) {
00758             s = p->value;
00759             while ( *s ) { s++; nnum++; }
00760         }
00761         else nnum = 1;
00762         if ( nnum >= num ) {
00763             /*
00764                 We can keep this in place
00765             */
00766             if ( value && p->value ) {
00767                 s = value;
00768                 t = p->value;
00769                 while ( *s ) *t++ = *s++;
00770                 *t = 0;
00771             }
00772             else p->value = 0;
00773             return(ii);
00774         }
00775     }
00776     s = name; while ( *s ) { s++; num++; }
00777     t = (UBYTE *)Malloc1(num,"PreVariable");
00778     p->name = t;
00779     s = name; while ( *s ) *t++ = *s++; *t++ = 0;
00780     if ( value ) {
00781         p->value = t;
00782         s = value; while ( *s ) *t++ = *s++; *t = 0;
00783         if ( AM.atstartup && t[-1] == '\n' ) t[-1] = 0;
00784     }
00785     else p->value = 0;
00786     p->wildarg = 0;
00787     if ( args ) {
00788         int first = 1;
00789         t++; p->argnames = t;
00790         s = args;
00791         while ( *s ) {
00792             if ( *s == ' ' || *s == '\t' ) { s++; continue; }
00793             if ( *s == ',' ) {
00794                 s++; *t++ = 0; numargs++;
00795                 while ( *s == ' ' || *s == '\t' ) s++;

```

```

00796         if ( *s == '?' ) {
00797             if ( p->wildarg > 0 ) {
00798                 Error0("More than one ?var in #define");
00799             }
00800             p->wildarg = numargs;
00801         }
00802     }
00803     else if ( *s == '?' && first ) {
00804         p->wildarg = 1; *t++ = *s++;
00805     }
00806     else { *t++ = *s++; }
00807     first = 0;
00808 }
00809 *t = 0;
00810 numargs++;
00811 p->nargs = numargs;
00812 }
00813 else {
00814     p->nargs = 0;
00815     p->argnames = 0;
00816 }
00817 if ( u ) M_free(u,"replace PreVar value");
00818 return(ii);
00819 }
00820
00821 /*
00822     #] PutPreVar :
00823     #[ PopPreVars :
00824 */
00825
00826 void PopPreVars(int tonumber)
00827 {
00828     PREVAR *p = &(PreVar[NumPre]);
00829     while ( NumPre > tonumber ) {
00830         NumPre--; p--;
00831         M_free(p->name,"popping PreVar");
00832         p->name = p->value = 0;
00833     }
00834 }
00835
00836 /*
00837     #] PopPreVars :
00838     #[ IniModule :
00839 */
00840
00841 void IniModule(int type)
00842 {
00843     GETIDENTITY
00844     WORD **w, i;
00845     CBUF *C = cbuf+AC.cbunum;
00846     /*[05nov2003 mt]:*/
00847 #ifdef WITHMPI
00848     /* To prevent
00849      * (1) FlushOut() and PutOut() on the slaves to send a mess to the master
00850      * compiling a module,
00851      * (2) EndSort() called from poly_factorize_expression() on the master
00852      * waits for the slaves.
00853      */
00854     PF.parallel=0;
00855     /*BTW, this was the bug preventing usage of more than 1 expression!*/
00856 #endif
00857     AR.BracketOn = 0;
00858     AR.StoreData.dirtyflag = 0;
00859     AC.bracketindexflag = 0;
00860     AT.bracketindexflag = 0;
00861
00862     /*[06nov2003 mt]:*/
00863 #ifdef WITHMPI
00864     /* This flag may be set in the procedure tokenize(). */
00865     AC.RhsExprInModuleFlag = 0;
00866     /*[20oct2009 mt]:*/
00867     PF.mkSlaveInfile=0;
00868     PF.slavebuf.PObuffer=NULL;
00869     for(i=0; i<NumExpressions; i++)
00870         Expressions[i].vflags &= ~ISINRHS;
00871     /*[20oct2009 mt]:*/
00872 #endif
00873     /*[06nov2003 mt]:*/
00874
00875     /*[19nov2003 mt]:*/
00876     /*The module counter:*/
00877     (AC.CModule)++;
00878     /*[19nov2003 mt]:*/
00879
00880     if ( !type ) {
00881         if ( C->rhs ) {

```

```

00883         w = C->rhs; i = C->maxrhs;
00884         do { *w++ = 0; } while ( --i > 0 );
00885     }
00886     if ( C->lhs ) {
00887         w = C->lhs; i = C->maxlhs;
00888         do { *w++ = 0; } while ( --i > 0 );
00889     }
00890 }
00891 C->numlhs = C->numrhs = 0;
00892 ClearTree(AC.cbufnum);
00893 while ( AC.NumLabels > 0 ) {
00894     AC.NumLabels--;
00895     if ( AC.LabelNames[AC.NumLabels] ) M_free(AC.LabelNames[AC.NumLabels], "LabelName");
00896 }
00897
00898 C->Pointer = C->Buffer;
00899
00900 AC.Commercial[0] = 0;
00901
00902 AC.IfStack = AC.IfHeap;
00903 AC.arglevel = 0;
00904 AC.termlevel = 0;
00905 AC.IfLevel = 0;
00906 AC.WhileLevel = 0;
00907 AC.RepLevel = 0;
00908 AC.insidelevel = 0;
00909 AC.dolooplevel = 0;
00910 AC.MustTestTable = 0;
00911 AO.PrintType = 0; /* Otherwise statistics can get spoiled */
00912 AC.ComDefer = 0;
00913 AC.CollectFun = 0;
00914 AM.S0->PolyWise = 0;
00915 AC.SymChangeFlag = 0;
00916 AP.lhdollarerror = 0;
00917 AR.PolyFun = AC.lPolyFun;
00918 AR.PolyFunInv = AC.lPolyFunInv;
00919 AR.PolyFunType = AC.lPolyFunType;
00920 AR.PolyFunExp = AC.lPolyFunExp;
00921 AR.PolyFunVar = AC.lPolyFunVar;
00922 AR.PolyFunPow = AC.lPolyFunPow;
00923 AC.mparallelfldflag = AC.parallelfldflag | AM.hparallelfldflag;
00924 AC.inparallelfldflag = 0;
00925 AC.mProcessBucketSize = AC.ProcessBucketSize;
00926 NumPotModdollars = 0;
00927 AC.topolynomialflag = 0;
00928 #ifdef WITHPTHREADS
00929     if ( AM.totalnumberofthreads > 1 ) AS.MultiThreaded = 1;
00930     else AS.MultiThreaded = 0;
00931     for ( i = 1; i < AM.totalnumberofthreads; i++ ) {
00932         AB[i]->T.S0->PolyWise = 0;
00933     }
00934 #endif
00935     OpenTemp();
00936 }
00937
00938 /*
00939     #] IniModule :
00940     #[ IniSpecialModule :
00941 */
00942
00943 void IniSpecialModule(int type)
00944 {
00945     DUMMYUSE(type);
00946 }
00947
00948 /*
00949     #] IniSpecialModule :
00950     #[ PreProcessor :
00951 */
00952
00953 void PreProcessor(void)
00954 {
00955     int moduletype = FIRSTMODULE;
00956     int specialtype = 0;
00957     int error1 = 0, error2 = 0, retcode, retval;
00958     UBYTE c, *t, *s;
00959     AP.StopWatchZero = GetRunningTime();
00960     AC.compiletype = 0;
00961     AP.PreContinuation = 0;
00962     AP.PreAssignLevel = 0;
00963     AP.gNumPre = NumPre;
00964     AC.iPointer = AC.iBuffer;
00965     AC.iPointer[0] = 0;
00966
00967     if ( AC.CheckpointFlag == -1 ) DoRecovery(&moduletype);
00968     AC.CheckpointStamp = Timer(0);
00969 }

```

```

00970     for(;;) {
00971     /*      if ( A.StatisticsFlag ) CharOut(LINEFEED); */
00972
00973         IniModule(moduletype);
00974
00975         /*Re-define preprocessor variable CMODULE_ as a current module number, starting from 1*/
00976         /*The module counter is AC.CModule, it is incremented in IniModule*/
00977         {
00978             UBYTE buf[24];/*64/Log_2[10] = 19.3, this is enough for any integer*/
00979             NumToStr(buf,AC.CModule);
00980             PutPreVar((UBYTE *) "CMODULE_",buf,0,1);
00981         }
00982
00983         if ( specialtype ) IniSpecialModule(specialtype);
00984
00985         for(;;) { /* Read a single line/statement */
00986             c = GetChar(0);
00987             if ( c == AP.ComChar ) { /* This line is commentary */
00988                 LoadInstruction(5);
00989                 if ( AC.CurrentStream->FoldName ) {
00990                     t = AP.preStart;
00991                     if ( *t && t[1] && t[2] == '#' && t[3] == ']' ) {
00992                         t += 4;
00993                         while ( *t == ' ' || *t == '\t' ) t++;
00994                         s = AC.CurrentStream->FoldName;
00995                         while ( *s == *t ) { s++; t++; }
00996                         if ( *s == 0 && ( *t == ' ' || *t == '\t'
00997                             || *t == ':' ) ) {
00998                             while ( *t == ' ' || *t == '\t' ) t++;
00999                             if ( *t == ':' ) {
01000                                 AC.CurrentStream = CloseStream(AC.CurrentStream);
01001                             }
01002                         }
01003                     }
01004                 }
01005                 *AP.preStart = 0;
01006                 continue;
01007             }
01008             while ( c == ' ' || c == '\t' ) c = GetChar(0);
01009             if ( c == LINEFEED ) continue;
01010             if ( c == ENDOFINPUT ) {
01011                 /*      CharOut(LINEFEED); */
01012                 Warning(".end instruction generated");
01013                 moduletype = ENDMODULE; specialtype = 0;
01014                 goto endmodule; /* Fake one */
01015             }
01016             if ( c == '#' ) {
01017                 if ( PreProInstruction() ) { error1++; error2++; AP.preError++; }
01018                 *AP.preStart = 0;
01019             }
01020             else if ( c == ':' ) {
01021                 if ( ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) ||
01022                     ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) ) {
01023                     LoadInstruction(1);
01024                     continue;
01025                 }
01026                 if ( ModuleInstruction(&moduletype,&specialtype) ) { error2++; AP.preError++; }
01027                 if ( specialtype ) SetSpecialMode(moduletype,specialtype);
01028                 if ( AP.PreInsideLevel != 0 ) {
01029                     MesPrint("@end of module instructions may not be used inside");
01030                     MesPrint("@the scope of a %#inside %#endinside construction.");
01031                     Terminate(-1);
01032                 }
01033                 if ( AC.RepLevel > 0 ) {
01034                     MesPrint("&EndRepeat statement(s) missing");
01035                     error2++; AP.preError++;
01036                 }
01037                 if ( AC.tablecheck == 0 ) {
01038                     AC.tablecheck = 1;
01039                     if ( TestTables() ) { error2++; AP.preError++; }
01040                 }
01041                 if ( AP.PreContinuation ) {
01042                     error1++; error2++;
01043                     MesPrint("&Unfinished statement. Missing ;?");
01044                 }
01045                 if ( moduletype == GLOBALMODULE ) MakeGlobal();
01046             }
01047             else {
01048                 if ( error2 == 0 && AM.qError == 0 ) {
01049                     retcode = ExecModule(moduletype);
01050                     #ifdef WITHMPI
01051                     if(PF.slavebuf.PObuffer!=NULL){
01052                         M_free(PF.slavebuf.PObuffer,"PF inbuf");
01053                         PF.slavebuf.PObuffer=NULL;
01054                     }
01055                     #endif
01056                     UpdatePositions();
01057                     if ( retcode < 0 ) error1++;

```

```

01057         if ( retcode ) { error2++; AP.preError++; }
01058     }
01059     else {
01060         EXPRESSIONS e;
01061         WORD j;
01062         for ( j = 0, e = Expressions; j < NumExpressions; j++, e++ ) {
01063             if ( e->replace == NEWLYDEFINEDEXPRESSION ) e->replace =
REGULAREXPRESSION;
01064         }
01065     }
01066     switch ( moduletype ) {
01067     case STOREMODULE:
01068         if ( ExecStore() ) error1++;
01069         break;
01070     case CLEARMODULE:
01071         FullCleanUp();
01072         error1 = error2 = AP.preError = 0;
01073         AM.atstartup = 1;
01074         PutPreVar((UBYTE *) "DATE_", (UBYTE *) MakeDate(), 0, 1);
01075         AM.atstartup = 0;
01076         if ( AM.resetTimeOnClear ) {
01077             #ifdef WITHPTHREADS
01078                 ClearAllThreads();
01079             #endif
01080                 AM.SumTime += TimeCPU(1);
01081                 TimeCPU(0);
01082             }
01083             AP.StopWatchZero = GetRunningTime();
01084             break;
01085     case ENDMODULE:
01086         Terminate( -( error1 | error2 ) );
01087     }
01088     }
01089     AC.tablecheck = 0;
01090     AC.compiletype = 0;
01091     if ( AC.exprfillwarning > 0 ) {
01092         AC.exprfillwarning = 0;
01093     }
01094     if ( AC.CheckpointFlag && error1 == 0 && error2 == 0 ) DoCheckpoint(moduletype);
01095     break; /* start a new module */
01096 }
01097 else {
01098     if ( ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) ||
01099         ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) ) {
01100         pushbackchar = c;
01101         LoadInstruction(5);
01102         continue;
01103     }
01104     UngetChar(c);
01105     if ( AP.PreContinuation ) {
01106         retval = LoadStatement(OLDSTATEMENT);
01107     }
01108     else {
01109         AC.CurrentStream->prevline = AC.CurrentStream->linenumber;
01110         retval = LoadStatement(NEWSTATEMENT);
01111     }
01112     if ( retval < 0 ) {
01113         error1++;
01114         if ( retval == -1 ) AP.PreContinuation = 0;
01115         else AP.PreContinuation = 1;
01116         TryRecover(0);
01117     }
01118     else if ( retval > 0 ) AP.PreContinuation = 0;
01119     else AP.PreContinuation = 1;
01120     if ( error1 == 0 && !AP.PreContinuation ) {
01121         if ( ( AP.PreDebug & PREPROONLY ) == 0 ) {
01122             int onpmd = NumPotModdollars;
01123             #ifdef WITHMPI
01124                 WORD oldRhsExprInModuleFlag = AC.RhsExprInModuleFlag;
01125                 if ( AP.PreAssignFlag ) AC.RhsExprInModuleFlag = 0;
01126             #endif
01127                 if ( AP.PreOut || ( AP.PreDebug & DUMPTOCOMPILER )
01128                     == DUMPTOCOMPILER )
01129                     MesPrint(" %s", AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]);
01130                 retcode = CompileStatement(AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]);
01131                 if ( retcode < 0 ) error1++;
01132                 if ( retcode ) { error2++; AP.preError++; }
01133                 if ( AP.PreAssignFlag ) {
01134                     if ( retcode == 0 ) {
01135                         if ( ( retcode = CatchDollar(0) ) < 0 ) error1++;
01136                         else if ( retcode > 0 ) { error2++; AP.preError++; }
01137                     }
01138                     else CatchDollar(-1);
01139                     POPPREASSIGNLEVEL;
01140                     if ( AP.PreAssignLevel <= 0 )
01141                         AP.PreAssignFlag = 0;
01142                     NumPotModdollars = onpmd;

```

```

01143 #ifdef WITHMPI
01144             AC.RhsExprInModuleFlag = oldRhsExprInModuleFlag;
01145 #endif
01146         }
01147     }
01148     else {
01149         MesPrint(" %s",AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]);
01150     }
01151 }
01152 else if ( !AP.PreContinuation ) {
01153     if ( AP.PreAssignLevel > 0 ) {
01154         POPPREASSIGNLEVEL;
01155         if ( AP.PreAssignLevel <=0 )
01156             AP.PreAssignFlag = 0;
01157     }
01158 }
01159 /*
01160         if ( !AP.PreContinuation ) AP.PreAssignFlag = 0;
01161 */
01162     }
01163 }
01164 }
01165 }
01166
01167 /*
01168     #] PreProcessor :
01169     #[ PreProInstruction :
01170 */
01171
01172 int PreProInstruction(void)
01173 {
01174     UBYTE *s, *t;
01175     KEYWORD *key;
01176     AP.PreproFlag = 1;
01177     AP.preFill = 0;
01178     AP.AllowDelay = 0;
01179     AP.DelayPrevar = 0;
01180
01181     oldmode = 0;
01182     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) {
01183         LoadInstruction(3);
01184         if ( ( StrICmp(AP.preStart,(UBYTE *)"case") == 0
01185             || StrICmp(AP.preStart,(UBYTE *)"default") == 0 )
01186             && AP.PreSwitchModes[AP.PreSwitchLevel] == SEARCHINGPRECASE ) {
01187             LoadInstruction(0);
01188         }
01189         else if ( StrICmp(AP.preStart,(UBYTE *)"assign ") == 0 ) {}
01190         else { LoadInstruction(1); }
01191     }
01192     else if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) {
01193         LoadInstruction(3);
01194         if ( ( StrICmp(AP.preStart,(UBYTE *)"else") == 0
01195             || StrICmp(AP.preStart,(UBYTE *)"elseif") == 0 )
01196             && AP.PreIfStack[AP.PreIfLevel] == LOOKINGFORELSE ) {
01197             LoadInstruction(0);
01198         }
01199         else if ( StrICmp(AP.preStart,(UBYTE *)"assign ") == 0 ) {}
01200         else {
01201             LoadInstruction(1);
01202         }
01203     }
01204     else {
01205         LoadInstruction(0);
01206     }
01207     AP.PreproFlag = 0;
01208     t = AP.preStart;
01209     if ( *t == '-' ) {
01210         if ( AP.PreSwitchModes[AP.PreSwitchLevel] == EXECUTINGPRESWITCH
01211             && AP.PreIfStack[AP.PreIfLevel] == EXECUTINGIF )
01212             AC.NoShowInput = 1;
01213     }
01214     else if ( *t == '+' ) {
01215         if ( AP.PreSwitchModes[AP.PreSwitchLevel] == EXECUTINGPRESWITCH
01216             && AP.PreIfStack[AP.PreIfLevel] == EXECUTINGIF )
01217             AC.NoShowInput = 0;
01218     }
01219     else if ( *t == ':' ) {}
01220     else {
01221         retry:;
01222         key = FindKeyWord(t,precommands,sizeof(precommands)/sizeof(KEYWORD));
01223         s = EndOfToken(t);
01224         if ( key == 0 ) {
01225             if ( *s == ';' ) {
01226                 *s = 0; goto retry;
01227             }
01228             else {
01229                 *s = 0;

```



```

01230         MesPrint("@Unrecognized preprocessor instruction: %s",t);
01231         return(-1);
01232     }
01233 }
01234 while ( *s == ' ' || *s == '\t' || *s == ',' ) s++;
01235 t = s;
01236 while ( *t ) t++;
01237 while ( ( t[-1] == ';' ) && ( t[-2] != '\\\ ' ) ) {
01238     t--; *t = 0;
01239 }
01240 return((key->func)(s));
01241 }
01242 return(0);
01243 }
01244
01245 /*
01246     #] PreProInstruction :
01247     #[ LoadInstruction :
01248
01249     0: preprocessor instruction that may involve matching of brackets
01250     1: runs straight to end-of-line
01251     2: runs to ;
01252     3: only gets one word without ` ' interpretation.
01253     5: with pushbackchar, but inside commentary. -> 1
01254
01255 To be added:
01256     In define, redefine, call and listed do we may have delayed substitution
01257     of preprocessor variables.
01258 */
01259
01260 int LoadInstruction(int mode)
01261 {
01262     UBYTE *s, *sstart, *t, c, cp;
01263     LONG position, fillpos = 0;
01264     int bralevel = 0, parlevel = 0, first = 1;
01265     int quotelevel = 0;
01266     if ( AP.preFill ) {
01267         s = AP.preFill;
01268         AP.preFill = 0;
01269         if ( s[1] != LINEFEED && s[1] != ENDOFINPUT ) {
01270             s[0] = s[1]; s++;
01271         }
01272         else { oldmode = mode; return(0); }
01273     }
01274     else { s = AP.preStart; }
01275     sstart = s; *s = 0;
01276     for(;;) {
01277         if ( ( mode & 1 ) == 1 ) {
01278             if ( pushbackchar && ( mode == 3 || mode == 5 ) ) {
01279                 c = pushbackchar; pushbackchar = 0;
01280             }
01281             else c = GetInput();
01282         }
01283         else {
01284             c = GetChar(0);
01285         }
01286
01287         if ( mode == 2 && c == ';' ) break;
01288         if ( ( mode == 1 || mode == 5 ) && c == LINEFEED ) break;
01289         if ( mode == 3 && FG.cTable[c] != 0 ) {
01290             if ( c == '$' ) {
01291                 pushbackchar = '$';
01292                 *s++ = 'a'; *s++ = 's'; *s++ = 's'; *s++ = 'i';
01293                 *s++ = 'g'; *s++ = 'n'; *s++ = ' '; *s = 0;
01294             }
01295             if ( c == '\\' || c == '`' ) { /* we do not expand preprocessor variables */
01296                 mode = 1;
01297             }
01298             else {
01299                 AP.preFill = s; *s++ = 0; *s = c;
01300                 oldmode = mode;
01301                 return(0);
01302             }
01303         }
01304         if ( mode == 0 && first ) {
01305             if ( c == '$' ) {
01306                 dodollar:
01307                 s = sstart;
01308                 *s++ = 'a'; *s++ = 's'; *s++ = 's'; *s++ = 'i';
01309                 *s++ = 'g'; *s++ = 'n'; *s = 0;
01310                 pushbackchar = c;
01311                 oldmode = mode;
01312                 return(0);
01313             }
01314             if ( c == ' ' || c == '\t' || c == ',' ) {}
01315             else first = 0;
01316         }
01317         else if ( mode == 1 && first && c == '$' && oldmode == 3 ) goto dodollar;

```

```

01317         if ( c == ENDOFINPUT || ( c == LINEFEED
01318 /*      && bralevel == 0 */
01319         && quotelevel == 0 ) ) {
01320             if ( mode == 2 && c == ENDOFINPUT ) {
01321                 MesPrint("@Unexpected end of instruction");
01322                 oldmode = mode;
01323                 return(-1);
01324             }
01325 /*
01326             if ( mode == 0 && bralevel ) {
01327                 MesPrint("@Unmatched brackets");
01328                 oldmode = mode;
01329                 return(-1);
01330             }
01331 */
01332             if ( mode != 2 ) break;
01333         }
01334         if ( quotelevel ) {
01335             if ( c == '\\\\' ) {
01336                 if ( ( mode == 1 ) || ( mode == 5 ) ) c = GetInput();
01337                 else {
01338                     c = GetChar(0);
01339                 }
01340                 if ( c == ENDOFINPUT ) {
01341                     MesPrint("@Unmatched \"");
01342                     if ( mode == 2 && c == ENDOFINPUT ) {
01343                         MesPrint("@Unexpected end of instruction");
01344                     }
01345 /*
01346                     if ( mode == 0 && bralevel ) {
01347                         MesPrint("@Unmatched brackets");
01348                     }
01349 */
01350                     oldmode = mode;
01351                     return(-1);
01352                 }
01353                 else if ( c == LINEFEED ) {}
01354                 else if ( c == '"' ) { *s++ = '\\\\'; }
01355                 else {
01356                     *s++ = '\\\\';
01357                 }
01358             }
01359             else if ( c == '"' ) {
01360                 quotelevel = 0;
01361                 AP.AllowDelay = 0;
01362             }
01363         }
01364         else if ( c == '\\\\' ) {
01365             if ( ( mode == 1 ) || ( mode == 5 ) ) cp = GetInput();
01366             else {
01367                 cp = GetChar(0);
01368             }
01369             if ( cp == LINEFEED ) continue;
01370             if ( mode != 2 || cp != ';' ) *s++ = c;
01371             c = cp;
01372         }
01373         else if ( c == '"' ) {
01374 /*
01375             Now look back in the buffer and determine what the keyword is.
01376             If it is define or redefine, put AllowDelay to 1.
01377 */
01378             t = AP.preStart;
01379             while ( FG.cTable[*t] <= 1 ) t++;
01380             cp = *t; *t = 0;
01381             if ( ( StrICmp(AP.preStart, (UBYTE *) "define") == 0 )
01382                 || ( StrICmp(AP.preStart, (UBYTE *) "redefine") == 0 ) ) {
01383                 AP.AllowDelay = 1;
01384                 oldstream = AC.CurrentStream;
01385             }
01386             *t = cp;
01387             quotelevel = 1;
01388         }
01389         else if ( quotelevel == 0 && bralevel == 0 && c == '(' ) {
01390             t = AP.preStart;
01391             while ( FG.cTable[*t] <= 1 ) t++;
01392             cp = *t; *t = 0;
01393             if ( ( parlevel == 0 )
01394                 && ( StrICmp(AP.preStart, (UBYTE *) "call") == 0 ) ) {
01395                 AP.AllowDelay = 1;
01396                 oldstream = AC.CurrentStream;
01397             }
01398             *t = cp;
01399             parlevel++;
01400         }
01401         else if ( quotelevel == 0 && bralevel == 0 && c == ')' ) {
01402             parlevel--;
01403         }

```

```

01404     else if ( quotelevel == 0 && parlevel == 0 && c == '{' ) {
01405         t = AP.preStart;
01406         while ( FG.cTable[*t] <= 1 ) t++;
01407         cp = *t; *t = 0;
01408         if ( ( bralevel == 0 )
01409             && ( ( StrICmp(AP.preStart, (UBYTE *) "call") == 0 )
01410                 || ( StrICmp(AP.preStart, (UBYTE *) "do") == 0 ) ) ) {
01411             AP.AllowDelay = 1;
01412             oldstream = AC.CurrentStream;
01413         }
01414         *t = cp;
01415         bralevel++;
01416     }
01417     else if ( quotelevel == 0 && parlevel == 0 && c == '}' ) {
01418         bralevel--;
01419         if ( bralevel < 0 ) {
01420             if ( mode != 5 ) {
01421                 MesPrint("Unmatched brackets");
01422                 oldmode = mode;
01423                 return(-1);
01424             }
01425             bralevel = 0;
01426         }
01427     }
01428     if ( s >= (AP.preStop-1) ) {
01429         UBYTE **ppp;
01430         position = s - AP.preStart;
01431         if ( AP.preFill ) fillpos = AP.preFill - AP.preStart;
01432         ppp = &(AP.preStart); /* to avoid a compiler warning */
01433         if ( DoubleLList((void ***)ppp, &AP.pSize, sizeof(UBYTE),
01434             "instruction buffer") ) { *s = 0; oldmode = mode; return(-1); }
01435         AP.preStop = AP.preStart + AP.pSize-3;
01436         s = AP.preStart + position;
01437         if ( AP.preFill ) AP.preFill = fillpos + AP.preStart;
01438     }
01439     *s++ = c;
01440 }
01441 *s = 0;
01442 oldmode = mode;
01443 if ( mode == 0 ) {
01444     if ( ExpandTripleDots(1) < 0 ) return(-1);
01445 }
01446 return(0);
01447 }
01448
01449 /*
01450     #] LoadInstruction :
01451     #[ LoadStatement :
01452
01453     Puts the current string together in the input buffer.
01454     Does things like placing comma's where needed and expand ...
01455     We force a comma after the keyword. Before 8-sep-2009 the program might
01456     not put a comma if a + or - followed. And then the compiler ate
01457     the + or - and we needed repair code in the routines that used the
01458     + or - (Print, modulus, multiply and (a)bracket). This worked but
01459     the problem was with statements like Dimension -4; which then would
01460     be processed as Dimension 4; (JV)
01461 */
01462
01463 int LoadStatement(int type)
01464 {
01465     UBYTE *s, c, cp;
01466     int retval = 0, stringlevel = 0, newstatement = 0;
01467     if ( type == NEWSTATEMENT ) { AP.eat = 1; newstatement = 1;
01468         s = AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]; }
01469     else { s = AC.iPointer; *s = 0; c = ' '; goto blank; }
01470     *s = 0;
01471     for(;;) {
01472         c = GetChar(0);
01473         if ( c == ENDOFINPUT ) { retval = -1; break; }
01474         if ( stringlevel == 0 ) {
01475             if ( c == LINEFEED ) {
01476                 if ( AP.eat < 0 ) { s--; AP.eat = 0; }
01477                 retval = 0; break;
01478             }
01479             if ( c == ';' ) {
01480                 if ( AP.eat < 0 ) { s--; AP.eat = 0; }
01481                 while ( ( c = GetChar(0) ) == ' ' || c == '\t' ) {}
01482                 if ( c != LINEFEED ) UngetChar(c);
01483                 retval = 1;
01484                 break;
01485             }
01486         }
01487         if ( c == '\\\\' ) {
01488             cp = GetChar(0);
01489             if ( cp == LINEFEED ) continue;
01490             *s++ = c;

```

```

01491         c = cp;
01492     }
01493     if ( c == '"' ) {
01494         if ( stringlevel == 0 ) stringlevel = 1;
01495         else stringlevel = 0;
01496         AP.eat = 0;
01497     }
01498     else if ( stringlevel == 0 ) {
01499         if ( c == '\\t' ) c = ' ';
01500         if ( c == '\\n' ) {
01501             blank:
01502                 if ( newstatement < 0 ) newstatement = 0;
01503                 if ( AP.eat && ( newstatement == 0 ) ) continue;
01504                 c = ' ';
01505                 AP.eat = -2;
01506                 if ( newstatement > 0 ) newstatement = -1;
01507         }
01508         else if ( chartype[c] <= 3 ) {
01509             AP.eat = 0;
01510             if ( newstatement < 0 ) newstatement = 0;
01511         }
01512         else if ( c == ',' ) {
01513             if ( newstatement > 0 ) {
01514                 newstatement = -1;
01515                 AP.eat = -2;
01516             }
01517             else if ( AP.eat == -2 ) { s--; } /*
01518             else if ( AP.eat == -2 ) { AP.eat = 1; continue; }
01519             else { goto doall; }
01520         }
01521         else {
01522             doall::
01523                 if ( AP.eat < 0 ) {
01524                     if ( newstatement == 0 ) s--;
01525                     else { newstatement = 0; }
01526                 }
01527                 else if ( newstatement == 1 ) newstatement = 0;
01528                 AP.eat = 1;
01529                 if ( c == '*' && s > AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel] && s[-1] == '*' )
01530                 {
01531                     s[-1] = '^';
01532                     continue;
01533                 }
01534             }
01535         }
01536         if ( s >= AC.iStop ) {
01537             if ( !AP.iBufError ) {
01538                 LONG position = s - AC.iBuffer;
01539                 LONG position2 = AC.iPointer - AC.iBuffer;
01540                 UBYTE **ppp = &(AC.iBuffer); /* to avoid a compiler warning */
01541                 if ( DoubleLList((void ***)ppp,&AC.iBufferSize
01542                     ,sizeof(UBYTE),"statement buffer") ) {
01543                     *s = 0; retval = -1; AP.iBufError = 1;
01544                 }
01545                 AC.iPointer = AC.iBuffer + position2;
01546                 AC.iStop = AC.iBuffer + AC.iBufferSize-2;
01547                 s = AC.iBuffer + position;
01548             }
01549             if ( AP.iBufError ) {
01550                 for(;;){
01551                     c = GetChar(0);
01552                     if ( c == ENDOFINPUT ) { retval = -1; break; }
01553                     if ( c == '"' ) {
01554                         if ( stringlevel > 0 ) stringlevel = 0;
01555                         else stringlevel = 1;
01556                     }
01557                     else if ( c == LINEFEED && !stringlevel ) { retval = -2; break; }
01558                     else if ( c == ';' && !stringlevel ) {
01559                         while ( ( c = GetChar(0) ) == ' ' || c == '\\t' ) {}
01560                         if ( c != LINEFEED ) UngetChar(c);
01561                         retval = -1;
01562                         break;
01563                     }
01564                     else if ( c == '\\\\' ) c = GetChar(0);
01565                 }
01566                 break;
01567             }
01568         }
01569         *s++ = c;
01570     }
01571     AC.iPointer = s;
01572     *s = 0;
01573     if ( stringlevel > 0 ) {
01574         MesPrint("@Unbalanced \". Runaway string");
01575         retval = -1;
01576     }
01577     if ( retval == 1 ) {
01578         if ( ExpandTripleDots(0) < 0 ) retval = -1;
01579     }

```

```

01577     return(retval);
01578 }
01579
01580 /*
01581     #] LoadStatement :
01582     #[ ExpandTripleDots :
01583 */
01584
01585 static inline int IsSignChar(UBYTE c)
01586 {
01587     return c == '+' || c == '-';
01588 }
01589
01590 static inline int IsAlphanumericChar(UBYTE c)
01591 {
01592     return FG.cTable[c] == 0 || FG.cTable[c] == 1;
01593 }
01594
01595 static inline int CanParseSignedNumber(const UBYTE *s)
01596 {
01597     while ( IsSignChar(*s) ) s++;
01598     return FG.cTable[*s] == 1;
01599 }
01600
01601 int ExpandTripleDots(int par)
01602 {
01603     UBYTE *s, *s1, *s2, *n1, *n2, *t1, *t2, *startp, operator1, operator2, c, cc;
01604     UBYTE *nBuffer, *strngs, *Buffer, *Stop;
01605     LONG withquestion, x1, x2, y1, y2, number, inc, newsize, pow, fullsize;
01606     int i, error = 0, i1, i2, ii, *nums = 0;
01607
01608     if ( par == 0 ) {
01609         Buffer = AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]; Stop = AC.iStop;
01610     }
01611     else {
01612         Buffer = AP.preStart; Stop = AP.preStop;
01613     }
01614     s = Buffer; while ( *s ) s++;
01615     fullsize = s - Buffer;
01616     if ( fullsize < 7 ) return(error);
01617
01618     s = Buffer+2;
01619     while ( *s ) {
01620         if ( *s != '.' || ( s[-1] != ',' && FG.cTable[s[-1]] != 5 ) )
01621             { s++; continue; }
01622         if ( s[-1] == '%' || s[-1] == '^' || s[1] != '.' || s[2] != '.' )
01623             { s++; continue; }
01624         s1 = s - 2;
01625         s += 3;
01626         if ( *s != s[-4] && ( *s != '+' || s[-4] != '-' )
01627             && ( *s != '-' || s[-4] != '+' ) ) {
01628             MesPrint("&Improper operators for ...");
01629             error = -1;
01630         }
01631         operator1 = s[-4];
01632         operator2 = *s++;
01633         if ( operator1 == ':' ) operator1 = '.';
01634         if ( operator2 == ':' ) operator2 = '.';
01635     /*
01636         We have now O1...O2 (O stands for operator)
01637         Full syntax is
01638         [str]#1[?]O1...O2[str]#2[?] (Special case)
01639         in which both strings are identical and if one ? then also the other.
01640         <pattern1>O1...O2<pattern2> (General case)
01641         in which the difference in the patterns is just numerical.
01642     */
01643     s2 = s; /* the beginning of the second string */
01644     if ( *s2 != '<' || *s1 != '>' ) { /* Special case */
01645         startp = s1+1;
01646         withquestion = ( *s1 == '?' ); s1--;
01647         while ( FG.cTable[*s1] == 1 && s1 >= Buffer ) s1--;
01648         n1 = s1+1; /* Beginning of first number */
01649         if ( FG.cTable[*n1] != 1 ) {
01650             MesPrint("&No first number in ... operator");
01651             error = -1;
01652         }
01653         while ( FG.cTable[*s1] <= 1 && s1 >= Buffer ) s1--;
01654         s1++;
01655     /*
01656         We have now the first string from s1 to n1, number from n1
01657     */
01658     t1 = s1; t2 = s2;
01659     while ( t1 < n1 && *t1 == *t2 ) { t1++; t2++; }
01660     n2 = t2;
01661     if ( FG.cTable[*t2] != 1 ) {
01662         MesPrint("&No second number in ... operator");
01663         error = -1;

```

```

01664     }
01665     x2 = 0;
01666     while ( FG.cTable[*t2] == 1 ) x2 = 10*x2 + *t2++ - '0';
01667     x1 = 0;
01668     while ( FG.cTable[*t1] == 1 ) x1 = 10*x1 + *t1++ - '0';
01669     if ( withquestion != ( *t2 == '?' ) ) {
01670         MesPrint("&Improper use of ? in ... operator");
01671         if ( *t2 == '?' ) t2++;
01672         error = -1;
01673     }
01674     else if ( withquestion ) t2++;
01675     if ( FG.cTable[*t2] <= 2 ) {
01676         MesPrint("&Illegal object after ... construction");
01677         error = -1;
01678     }
01679     c = *nl; *nl = 0; s = t2;
01680     if ( error ) continue;
01681 /*
01682     At this point the syntax has been fulfilled. We have
01683     str in s1.
01684     x1,x2 are #1,#2
01685     operator1,operator2 are the two operators.
01686     s points at whatever comes after.
01687     Expansion will have to be computed.
01688 */
01689     if ( x2 < x1 ) { number = x1-x2; inc = -1; y1 = x2; y2 = x1; }
01690     else { number = x2-x1; inc = 1; y1 = x1; y2 = x2; }
01691     newsize = (number+1)*(nl-s1) /* the strings */
01692             + number /* the operators */
01693             +(number+1)*(withquestion?1:0) /* questionmarks */
01694             +(number+1); /* last digits */
01695     pow = 10;
01696     for ( i = 1; i < 10; i++, pow *= 10 ) {
01697         if ( y1 >= pow ) newsize += number+1;
01698         else if ( y2 >= pow ) newsize += y2-pow+1;
01699         else break;
01700     }
01701     while ( Buffer+(fullsize+newsize-(s-s1)) >= Stop ) {
01702         LONG strpos = s1-Buffer;
01703         LONG endstr = nl-Buffer;
01704         LONG startq = startp - Buffer;
01705         LONG position = s - Buffer;
01706         UBYTE *ppp;
01707         if ( par == 0 ) {
01708             LONG position2 = AC.iPointer - AC.iBuffer;
01709             ppp = &(AC.iBuffer); /* to avoid a compiler warning */
01710             if ( DoubleLList((void ***)ppp,&AC.iBufferSize
01711                             ,sizeof(UBYTE),"statement buffer") ) {
01712                 Terminate(-1);
01713             }
01714             AC.iPointer = AC.iBuffer + position2;
01715             AC.iStop = AC.iBuffer + AC.iBufferSize-2;
01716             Buffer = AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]; Stop = AC.iStop;
01717         }
01718         else {
01719             LONG fillpos = 0;
01720             if ( AP.preFill ) fillpos = AP.preFill - AP.preStart;
01721             ppp = &(AP.preStart); /* to avoid a compiler warning */
01722             if ( DoubleLList((void ***)ppp,&AP.pSize,sizeof(UBYTE),
01723                             "instruction buffer") ) {
01724                 Terminate(-1);
01725             }
01726             AP.preStop = AP.preStart + AP.pSize-3;
01727             if ( AP.preFill ) AP.preFill = fillpos + AP.preStart;
01728             Buffer = AP.preStart; Stop = AP.preStop;
01729         }
01730         s = Buffer + position;
01731         nl = Buffer + endstr;
01732         s1 = Buffer + strpos;
01733         startp = Buffer + startq;
01734     }
01735 /*
01736     We have space for the expansion in the buffer.
01737     There are two cases: new size > old size
01738                        old size >= new size
01739     Note that wherever we move things, it will be at least startp.
01740 */
01741     if ( newsize > (s-s1) ) {
01742         t2 = Buffer + fullsize;
01743         t1 = t2 + (newsize - (s-s1));
01744         *t1 = 0;
01745         while ( t2 > s ) { *--t1 = *--t2; }
01746     }
01747     else if ( newsize < (s-s1) ) {
01748         t1 = s1 + newsize; t2 = s; s = t1;
01749         while ( *t2 ) *t1++ = *t2++;
01750         *t1 = 0;

```

```

01751     }
01752     for ( x1 += inc, t1 = startp; number > 0; number--, x1 += inc ) {
01753         *t1++ = operator1;
01754         cc = operator1; operator1 = operator2; operator2 = cc;
01755         t2 = s1; while ( *t2 ) *t1++ = *t2++;
01756         x2 = x1; n2 = t1;
01757         do {
01758             *t1++ = '0' + x2 % 10;
01759             x2 /= 10;
01760         } while ( x2 );
01761         s2 = t1 - 1;
01762         while ( s2 > n2 ) { cc = *s2; *s2 = *n2; *n2++ = cc; s2--; }
01763         if ( withquestion ) *t1++ = '?';
01764     }
01765     fullsize += newsize - ( s - s1 );
01766     *n1 = c;
01767 }
01768 else { /* General case. Find the patterns first */
01769     t1 = s1; s1--;
01770     while ( s1 > Buffer ) {
01771         if ( *s1 == '<' ) break;
01772         s1--;
01773     }
01774     t2 = s2;
01775     while ( *t2 ) {
01776         if ( *t2 == '>' ) break;
01777         t2++;
01778     }
01779     if ( *s1 != '<' || *t2 != '>' ) {
01780         MesPrint("&Illegal attempt to use ... operator");
01781         return(-1);
01782     }
01783     s1++; s2++; /* Pointers to the patterns */
01784     nums = (int *)Malloca1((t1-s1)*2*(sizeof(int)+sizeof(UBYTE))
01785         , "Expand ...");
01786     strngs = (UBYTE *) (nums + 2*(t1-s1));
01787     n1 = s1; n2 = s2; ii = -1; i = 0;
01788     s = strngs;
01789     while ( n1 < t1 || n2 < t2 ) {
01790         /* Check the next characters can be parsed as numbers including signs. */
01791         if ( CanParseSignedNumber(n1) && CanParseSignedNumber(n2) ) {
01792             /*
01793              * Don't allow the cases that one has the sign and the other doesn't,
01794              * and the meaning changes without the sign. For example,
01795              * <f(1)>+...<f(3)> Allowed
01796              * <f(-2)>+...<f(2)> Allowed
01797              * <f(x-2)>+...<f(x+2)> Allowed
01798              * <f(x-2)>+...<f(x2)> Not allowed
01799              */
01800             int sign1 = IsSignChar(*n1);
01801             int sign2 = IsSignChar(*n2);
01802             int inword1 = s1 < n1 && IsAlphanumericChar(n1[-1]);
01803             int inword2 = s2 < n2 && IsAlphanumericChar(n2[-1]);
01804             if ( ( sign1 ^ sign2 ) && ( inword1 || inword2 ) ) break; /* Not allowed. */
01805             if ( sign1 || sign2 ) {
01806                 *s++ = '+'; /* Marker indicating we need the sign. */
01807             }
01808         } else {
01809             /* If they are not numbers, they should be same. */
01810             if ( *n1 == *n2 ) { *s++ = *n1++; n2++; continue; }
01811             else break;
01812         }
01813         ParseSignedNumber(x1, n1);
01814         ParseSignedNumber(x2, n2);
01815         if ( x1 == x2 ) {
01816             if ( s != strngs && ( s[-1] == '+' || s[-1] == '-' ) ) {
01817                 /* We need the sign. */
01818                 s--;
01819                 if ( x1 >= 0 ) {
01820                     *s++ = '+';
01821                 }
01822             }
01823             s = NumCopy(x1, s);
01824         }
01825         else {
01826             nums[2*i] = x1; nums[2*i+1] = x2;
01827             i++; *s++ = 0;
01828         }
01829     }
01830     if ( n1 < t1 || n2 < t2 ) {
01831         MesPrint("&Improper use of ... operator.");
01832 theend: M_free(nums, "Expand ...");
01833         return(-1);
01834     }
01835     *s = 0;
01836     if ( i == 0 ) ii = 0;
01837     else {

```

```

01838         ii = nums[0] - nums[1];
01839         if ( ii < 0 ) ii = -ii;
01840         for ( x1 = 1; x1 < i; x1++ ) {
01841             x2 = nums[2*x1]-nums[2*x1+1];
01842             if ( x2 < 0 ) x2 = -x2;
01843             if ( x2 != ii ) {
01844                 MesPrint("&Improper synchronization of numbers in ... operator");
01845                 goto theend;
01846             }
01847         }
01848     }
01849     ii++;
01850 /*
01851     We have now proper syntax.
01852     There are i+1 strings in strngs and i pairs of numbers
01853     in nums. Each time a start value and a finish value.
01854     We have ii steps. If ii <= 2, it will fit in the existing
01855     allocation. But this is hardly useful.
01856     We make a new allocation and copy from the old.
01857     Compute space.
01858 */
01859     x2 = s - strngs - i; /* -1 for end-of-string and +1 for the operator*/
01860     for ( i1 = 0; i1 < i; i1++ ) {
01861         i2 = nums[2*i1];
01862         x1 = nums[2*i1+1];
01863         if ( i2 < 0 ) i2 = -i2;
01864         if ( x1 < 0 ) x1 = -x1;
01865         if ( x1 > i2 ) i2 = x1;
01866         x1 = 2;
01867         while ( i2 > 0 ) { i2 /= 10; x1++; }
01868         x2 += x1;
01869     }
01870     x2 *= ii; /* Space for the expanded string (a bit more) */
01871     x2 += fullsize;
01872     x2 += 5; /* This will definitely hold everything */
01873     x2 += sizeof(UBYTE *);
01874     x2 = x2 - (x2 & (sizeof(UBYTE *)-1));
01875
01876     nBuffer = (UBYTE *)Malloc1(x2,"input buffer");
01877     n1 = nBuffer; s = Buffer; s1--;
01878     while ( s < s1 ) *n1++ = *s++;
01879 /*
01880     Solution of the special case that no comma was generated
01881     due to the presence of < to start the pattern.
01882     We get a comma when the word before ends in an alphanumeric
01883     character, a _ or a ] and the word inside starts with an
01884     alphanumeric character, a [ (or an _ (for future considerations))
01885 */
01886     if ( ( ( n1 > nBuffer ) && ( ( FG.cTable[n1[-1]] <= 1 )
01887     || ( n1[-1] == '_' ) || ( n1[-1] == ']' ) ) ) &&
01888     ( ( FG.cTable[strngs[0]] <= 1 ) || ( strngs[0] == '[' )
01889     || ( strngs[0] == '_' ) ) ) *n1++ = ',';
01890
01891     for ( i1 = 0; i1 < ii; i1++ ) {
01892         s = strngs; while ( *s ) *n1++ = *s++;
01893         for ( i2 = 0; i2 < i; i2++ ) {
01894             if ( n1 > nBuffer && IsSignChar(n1[-1]) ) {
01895                 /* We need the sign of counters. */
01896                 n1--;
01897                 if ( nums[2*i2] >= 0 ) {
01898                     *n1++ = '+';
01899                 }
01900             }
01901             n1 = NumCopy((WORD)(nums[2*i2]),n1);
01902             if ( nums[2*i2] > nums[2*i2+1] ) nums[2*i2]--;
01903             else nums[2*i2]++;
01904             s++; while ( *s ) *n1++ = *s++;
01905         }
01906         if ( ( i1 & 1 ) == 0 ) *n1++ = operator1;
01907         else *n1++ = operator2;
01908     }
01909     n1--; /* drop the trailing operator */
01910     s = t2 + 1; n2 = n1;
01911 /*
01912     Similar extra comma
01913 */
01914     if ( ( ( ( FG.cTable[n1[-1]] <= 1 )
01915     || ( n1[-1] == '_' ) || ( n1[-1] == ']' ) ) ) &&
01916     ( ( FG.cTable[s[0]] <= 1 ) || ( s[0] == '[' )
01917     || ( s[0] == '_' ) ) ) *n1++ = ',';
01918
01919     while ( *s ) *n1++ = *s++;
01920     *n1 = 0;
01921     if ( par == 0 ) {
01922         LONG nnn1 = n1-nBuffer;
01923         LONG nnn2 = n2-nBuffer;
01924         LONG nnn3;

```



```

01925         while ( AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel] + x2 >= AC.iStop ) {
01926             LONG position = s-Buffer;
01927             LONG position2 = AC.iPointer - AC.iBuffer;
01928             UBYTE **ppp;
01929             ppp = &(AC.iBuffer); /* to avoid a compiler warning */
01930             if ( DoubleLList((void ***)ppp,&AC.iBufferSize
01931                 ,sizeof(UBYTE),"statement buffer") ) {
01932                 Terminate(-1);
01933             }
01934             AC.iPointer = AC.iBuffer + position2;
01935             AC.iStop = AC.iBuffer + AC.iBufferSize-2;
01936             Buffer = AC.iBuffer+AP.PreAssignStack[AP.PreAssignLevel]; Stop = AC.iStop;
01937             s = Buffer + position;
01938         }
01939     /*
01940         This can be improved. We only have to start from the first term.
01941     */
01942     for ( nnn3 = 0; nnn3 < nnn1; nnn3++ ) Buffer[nnn3] = nBuffer[nnn3];
01943     Buffer[nnn3] = 0;
01944     n1 = Buffer + nnn1;
01945     n2 = Buffer + nnn2;
01946     M_free(nBuffer,"input buffer");
01947     M_free(nums,"Expand ...");
01948 }
01949 else { /* Comes here only inside a real preprocessor instruction */
01950     AP.preStop = nBuffer + x2 - 2;
01951     AP.pSize = x2;
01952     M_free(AP.preStart,"input buffer");
01953     M_free(nums,"Expand ...");
01954     AP.preStart = nBuffer;
01955     Buffer = AP.preStart; Stop = AP.preStop;
01956 }
01957 fullsize = n1 - Buffer;
01958 s = n2;
01959 }
01960 }
01961 return(error);
01962 }
01963
01964 /*
01965     #] ExpandTripleDots :
01966     #[ FindKeyWord :
01967 */
01968
01969 KEYWORD *FindKeyWord(UBYTE *theword, KEYWORD *table, int size)
01970 {
01971     int low,med,hi;
01972     UBYTE *s1, *s2;
01973     low = 0;
01974     hi = size-1;
01975     while ( hi >= low ) {
01976         med = (hi+low)/2;
01977         s1 = (UBYTE *) (table[med].name);
01978         s2 = theword;
01979         while ( *s1 && tolower(*s1) == tolower(*s2) ) { s1++; s2++; }
01980         if ( *s1 == 0 &&
01981             /*[30apr2004 mt]:*/
01982             /* The bug!!:
01983                 FG.cTable[*s2] != 1 && FG.cTable[*s2] != 2
01984             */
01985                 FG.cTable[*s2] != 0 && FG.cTable[*s2] != 1
01986             /*
01987                 ( *s2 == ' ' || *s2 == '\t' || *s2 == 0 || *s2 == ',' || *s2 == '(' ) */
01988             )
01989             return(table+med);
01990         if ( tolower(*s2) > tolower(*s1) ) low = med+1;
01991         else hi = med - 1;
01992     }
01993     return(0);
01994 }
01995
01996 /*
01997     #] FindKeyWord :
01998     #[ FindInKeyWord :
01999 */
02000 KEYWORD *FindInKeyWord(UBYTE *theword, KEYWORD *table, int size)
02001 {
02002     int i;
02003     UBYTE *s1, *s2;
02004     for ( i = 0; i < size; i++ ) {
02005         s1 = (UBYTE *) (table[i].name);
02006         s2 = theword;
02007         while ( *s1 && tolower(*s1) == tolower(*s2) ) { s1++; s2++; }
02008         if ( *s2 == 0 || *s2 == ' ' || *s2 == ',' || *s2 == '\t' )
02009             return(table+i);
02010     }
02011     return(0);

```

```

02012 }
02013
02014 /*
02015     #] FindInKeyWord :
02016     #[ TheDefine :
02017 */
02018
02030 int TheDefine(UBYTE *s, int mode)
02031 {
02032     UBYTE *name, *value, *valpoin, *args = 0, c;
02033     if ( ( mode & 2 ) == 0 ) {
02034         if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02035         if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02036     }
02037     else { mode &= ~2; }
02038     name = s;
02039     if ( chartype[*s] != 0 ) goto illname;
02040     s++;
02041     while ( chartype[*s] <= 1 ) s++;
02042     value = s;
02043     while ( *s == ' ' || *s == '\t' ) s++;
02044     c = *s; *value = 0;
02045     if ( c == 0 ) {
02046         if ( PutPreVar(name, (UBYTE *) "1", 0, mode) < 0 ) return(-1);
02047         return(0);
02048     }
02049     if ( c == '(' ) { /* arguments. scan for correctness */
02050         s++; args = s;
02051         for (;;) {
02052             if ( chartype[*s] != 0 ) goto illarg;
02053             s++;
02054             while ( chartype[*s] <= 1 ) s++;
02055             while ( *s == ' ' || *s == '\t' ) s++;
02056             if ( *s == ')' ) break;
02057             if ( *s != ',' ) goto illargs;
02058             s++;
02059             while ( *s == ' ' || *s == '\t' ) s++;
02060         }
02061         *s++ = 0;
02062         while ( *s == ' ' || *s == '\t' ) s++;
02063         c = *s;
02064     }
02065     if ( c == '"' ) {
02066         s++; valpoin = value = s;
02067         while ( *s != '"' ) {
02068             if ( *s == '\\' ) {
02069                 if ( s[1] == 'n' ) { *valpoin++ = LINEFEED; s += 2; }
02070                 else if ( s[1] == '"' ) { *valpoin++ = '"'; s += 2; }
02071                 else if ( s[1] == 0 ) goto illval;
02072                 else { *valpoin++ = *s++; *valpoin++ = *s++; }
02073             }
02074             else *valpoin++ = *s++;
02075         }
02076         *valpoin = 0;
02077         if ( PutPreVar(name, value, args, mode) < 0 ) return(-1);
02078     }
02079     else {
02080         MesPrint("@Illegal string for preprocessor variable %s. Forgotten double quotes (\") ?", name);
02081         return(-1);
02082     }
02083     return(0);
02084 illname:;
02085     MesPrint("@Illegally formed name of preprocessor variable");
02086     return(-1);
02087 illarg:;
02088     MesPrint("@Illegally formed name of argument of preprocessor definition");
02089     return(-1);
02090 illargs:;
02091     MesPrint("@Illegally formed arguments of preprocessor definition");
02092     return(-1);
02093 illval:;
02094     MesPrint("@Illegal valpoin for preprocessor variable %s", name);
02095     return(-1);
02096 }
02097
02098 /*
02099     #] TheDefine :
02100     #[ DoCommentChar :
02101 */
02102
02103 int DoCommentChar(UBYTE *s)
02104 {
02105     UBYTE c;
02106     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02107     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02108     while ( *s == ' ' || *s == '\t' ) s++;
02109     if ( *s == 0 || *s == '\n' ) {

```

```

02110         MesPrint("@No valid comment character specified");
02111         return(-1);
02112     }
02113     c = *s++;
02114     while ( *s == ' ' || *s == '\t' ) s++;
02115     if ( *s != 0 && *s != '\n' ) {
02116         MesPrint("@Comment character should be a single valid character");
02117         return(-1);
02118     }
02119     AP.ComChar = c;
02120     return(0);
02121 }
02122
02123 /*
02124     #] DoCommentChar :
02125     #[ DoPreAssign :
02126
02127     Routine assigns a 'value' to a $variable.
02128     Syntax: #assign
02129           next line(s) a statement of the type
02130           $name = expression;
02131     Note: at the moment of the assign there cannot be an 'open' statement.
02132 */
02133
02134 int DoPreAssign(UBYTE *s)
02135 {
02136     int error = 0;
02137     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) {
02138         return(0);
02139     }
02140     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) {
02141         return(0);
02142     }
02143     if ( *s ) {
02144         MesPrint("@Illegal characters in %#assign instruction");
02145         error = 1;
02146     }
02147     PUSHPREASSIGNLEVEL;
02148     AP.PreAssignFlag = 1;
02149     /*
02150     if ( AP.PreContinuation ) {
02151         MesPrint("@Assign instructions cannot occur inside statements");
02152         MesPrint("@Missing ; ?");
02153         AP.PreContinuation = 0;
02154         error = 1;
02155     }
02156     */
02157     return(error);
02158 }
02159
02160 /*
02161     #] DoPreAssign :
02162     #[ DoDefine :
02163 */
02164
02165 int DoDefine(UBYTE *s)
02166 {
02167     return(TheDefine(s,0));
02168 }
02169
02170 /*
02171     #] DoDefine :
02172     #[ DoRedefine :
02173 */
02174
02175 int DoRedefine(UBYTE *s)
02176 {
02177     return(TheDefine(s,1));
02178 }
02179
02180 /*
02181     #] DoRedefine :
02182     #[ ClearMacro :
02183
02184     Undefines the arguments of a macro after its use.
02185 */
02186
02187 int ClearMacro(UBYTE *name)
02188 {
02189     int i;
02190     PREVAR *p;
02191     UBYTE *s;
02192     for ( i = NumPre-1, p = &(PreVar[NumPre-1]); i >= 0; i--, p-- ) {
02193         if ( StrCmp(name,p->name) == 0 ) break;
02194     }
02195     if ( i < 0 ) return(-1);
02196     if ( p->nargs <= 0 ) return(0);

```

```

02197     s = p->argnames;
02198     for ( i = 0; i < p->nargs; i++ ) {
02199         TheUndefine(s);
02200         while ( *s ) s++;
02201         s++;
02202     }
02203     return(0);
02204 }
02205
02206 /*
02207     #] ClearMacro :
02208     #[ TheUndefine :
02209
02210     There is a complication here. If there are redefine statements
02211     they will be pointing at the wrong variable if their number is
02212     greater than the number of the variable we pop.
02213 */
02214
02215 int TheUndefine(UBYTE *name)
02216 {
02217     int i, inum, error = 0;
02218     PREVAR *p;
02219     for ( i = NumPre-1, p = &(PreVar[NumPre-1]); i >= 0; i--, p-- ) {
02220         if ( StrCmp(name,p->name) == 0 ) {
02221             M_free(p->name,"undefining PreVar");
02222             NumPre--;
02223             inum = i;
02224             while ( i < NumPre ) {
02225                 p->name = p[1].name;
02226                 p->value = p[1].value;
02227                 p++; i++;
02228             }
02229             p->name = 0; p->value = 0;
02230             {
02231                 CBUF *CC = cbuf + AC.cbunum;
02232                 int j, k;
02233                 for ( j = 1; j <= CC->numlhs; j++ ) {
02234                     if ( CC->lhs[j][0] == TYPEREDEFPRE ) {
02235                         if ( CC->lhs[j][2] > inum ) CC->lhs[j][2]--;
02236                         else if ( CC->lhs[j][2] == inum ) {
02237                             for ( k = inum - 1; k >= 0; k-- )
02238                                 if ( StrCmp(name, PreVar[k].name) == 0 ) break;
02239                             if ( k >= 0 ) CC->lhs[j][2] = k;
02240                         }
02241                         else {
02242                             MesPrint("@Conflict between undefining a preprocessor variable and a
02243                                 redefine statement");
02244                             error = 1;
02245                         }
02246                     }
02247                 }
02248             }
02249             #ifdef PARALLELCODE
02250                 for ( j = 0; j < AC.numpfirstnum; j++ ) {
02251                     if ( AC.pfirstnum[j] > inum ) AC.pfirstnum[j]--;
02252                     else if ( AC.pfirstnum[j] == inum ) {
02253                         for ( k = inum - 1; k >= 0; k-- )
02254                             if ( StrCmp(name, PreVar[k].name) == 0 ) break;
02255                         if ( k >= 0 ) AC.pfirstnum[j] = k;
02256                     }
02257                 }
02258             #endif
02259             break;
02260         }
02261     }
02262     return(error);
02263 }
02264
02265 /*
02266     #] TheUndefine :
02267     #[ DoUndefine :
02268 */
02269
02270 int DoUndefine(UBYTE *s)
02271 {
02272     UBYTE *name, *t;
02273     int error = 0, retval;
02274
02275     /*
02276         int i;
02277         PREVAR *p;
02278     */
02279     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02280     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02281     name = s;
02282     if ( chartype[*s] != 0 ) goto illname;
02283     s++;
02284     while ( chartype[*s] <= 1 ) s++;

```

```

02283     t = s;
02284     if ( *s && *s != ' ' && *s != '\t' ) goto illname;
02285     while ( *s == ' ' || *s == '\t' ) s++;
02286     if ( *s ) {
02287         MesPrint("@Undefine should just have a variable name");
02288         error = -1;
02289     }
02290     *t = 0;
02291     if ( ( retval = TheUndefine(name) ) != 0 ) {
02292         if ( error == 0 ) return(retval);
02293         if ( error > 0 ) error = retval;
02294     }
02295     /*
02296     for ( i = NumPre-1, p = &(PreVar[NumPre-1]); i >= 0; i--, p-- ) {
02297         if ( StrCmp(name,p->name) == 0 ) {
02298             M_free(p->name,"undefining PreVar");
02299             NumPre--;
02300             while ( i < NumPre ) {
02301                 p->name = p[1].name;
02302                 p->value = p[1].value;
02303                 p++; i++;
02304             }
02305             p->name = 0; p->value = 0;
02306             break;
02307         }
02308     }
02309     */
02310     return(error);
02311 illname:;
02312     MesPrint("@Illegally formed name of preprocessor variable");
02313     return(-1);
02314 }
02315
02316 /*
02317     #] DoUndefine :
02318     #[ DoInclude :
02319 */
02320
02321 int DoInclude(UBYTE *s) { return(Include(s,FILESTREAM)); }
02322
02323 /*
02324     #] DoInclude :
02325     #[ DoReverseInclude :
02326 */
02327
02328 int DoReverseInclude(UBYTE *s) { return(Include(s,REVERSEFILESTREAM)); }
02329
02330 /*
02331     #] DoReverseInclude :
02332     #[ Include :
02333 */
02334
02335 int Include(UBYTE *s, int type)
02336 {
02337     UBYTE *name = s, *fold, *t, c, c1 = 0, c2 = 0, c3 = 0;
02338     int strloffset, withnolist = AC.NoShowInput;
02339     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02340     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02341     if ( *s == '-' || *s == '+' ) {
02342         if ( *s == '-' ) withnolist = 1;
02343         else withnolist = 0;
02344         s++;
02345         while ( *s == ' ' || *s == '\t' ) s++;
02346         name = s;
02347     }
02348     if ( *s == '"' ) {
02349         while ( *s && *s != '"' ) {
02350             if ( *s == '\\' ) s++;
02351             s++;
02352         }
02353         t = s++;
02354     }
02355     else {
02356         while ( *s && *s != ' ' && *s != '\t' ) {
02357             if ( *s == '\\' ) s++;
02358             s++;
02359         }
02360         t = s;
02361     }
02362     while ( *s == ' ' || *s == '\t' ) s++;
02363     if ( *s == '#' ) {
02364         *t = 0;
02365         s++;
02366         while ( *s == ' ' || *s == '\t' ) s++;
02367         fold = s;
02368         if ( *s == 0 ) {
02369             MesPrint("@Empty fold name");

```

```

02370         return(-1);
02371     }
02372     continue_fold:
02373     while ( *s && *s != ' ' && *s != '\t' ) {
02374         if ( *s == '\\' ) s++;
02375         s++;
02376     }
02377     t = s;
02378     while ( *s == ' ' || *s == '\t' ) s++;
02379     if ( *s ) {
02380         /*
02381          * A non-whitespace character is found. Continue parsing the fold.
02382          */
02383         goto continue_fold;
02384     }
02385 }
02386 else if ( *s == 0 ) {
02387     fold = 0;
02388 }
02389 else {
02390     MesPrint("@Improper syntax for file name");
02391     return(-1);
02392 }
02393 *t = 0;
02394 if ( fold ) {
02395     fold = strDup1(fold,"foldname");
02396 }
02397 /*
02398  We have the name of the file in 'name' and the fold in 'fold' (or NULL)
02399 */
02400 if ( OpenStream(name,type,0,PREENOACTION) == 0 ) {
02401     if ( fold ) { M_free(fold,"foldname"); fold = 0; }
02402     return(-1);
02403 }
02404 if ( fold ) {
02405     LONG position = -1;
02406     int foldopen = 0;
02407     LONG linenum = 0, prevline = 0;
02408     name = strDup1(name,"name of include file");
02409     AC.CurrentStream->FoldName = strDup1(fold,"name of fold");
02410     AC.NoShowInput++;
02411     for(;;) {
02412         c = GetFromStream(AC.CurrentStream);
02413         if ( c == EOFSTREAM ) {
02414             AC.CurrentStream = CloseStream(AC.CurrentStream);
02415             goto nofold;
02416         }
02417         if ( c == AP.ComChar ) {
02418             strloffset = AC.CurrentStream-AC.Streams;
02419             LoadInstruction(1);
02420             if ( AC.CurrentStream != strloffset+AC.Streams ) {
02421                 c = EOFSTREAM;
02422             }
02423             else {
02424                 t = AP.preStart;
02425                 if ( t[2] == '#' && ( t[3] == '[' && !foldopen )
02426                     || ( t[3] == ']' && foldopen ) ) {
02427                     t += 4;
02428                     while ( *t == ' ' || *t == '\t' ) t++;
02429                     s = AC.CurrentStream->FoldName;
02430                     while ( *s == *t ) { s++; t++; }
02431                     if ( *s == 0 && ( *t == ' ' || *t == '\t'
02432                         || *t == ':' ) ) {
02433                         while ( *t == ' ' || *t == '\t' ) t++;
02434                         if ( *t == ':' ) {
02435                             if ( foldopen == 0 ) {
02436                                 foldopen = 1;
02437                                 position = GetStreamPosition(AC.CurrentStream);
02438                                 linenum = AC.CurrentStream->linenum;
02439                                 prevline = AC.CurrentStream->prevline;
02440                                 c3 = AC.CurrentStream->isnextchar;
02441                                 c1 = AC.CurrentStream->nextchar[0];
02442                                 c2 = AC.CurrentStream->nextchar[1];
02443                             }
02444                             else {
02445                                 foldopen = 0;
02446                                 PositionStream(AC.CurrentStream,position);
02447                                 AC.CurrentStream->linenum = linenum;
02448                                 AC.CurrentStream->prevline = prevline;
02449                                 AC.CurrentStream->eqnum = 1;
02450                                 AC.NoShowInput--;
02451                                 AC.CurrentStream->isnextchar = c3;
02452                                 AC.CurrentStream->nextchar[0] = c1;
02453                                 AC.CurrentStream->nextchar[1] = c2;
02454                                 break;
02455                             }
02456                         }

```

```

02457     }
02458     }
02459     }
02460     }
02461     else {
02462         while ( c != LINEFEED && c != ENDOFSTREAM ) {
02463             c = GetFromStream(AC.CurrentStream);
02464             if ( c == ENDOFSTREAM ) {
02465                 AC.CurrentStream = CloseStream(AC.CurrentStream);
02466                 break;
02467             }
02468         }
02469     }
02470     if ( c == ENDOFSTREAM ) {
02471 nofold:
02472         MesPrint("@Cannot find fold %s in file %s",fold,name);
02473         UngetChar(c);
02474         AC.NoShowInput--;
02475         M_free(name,"name of include file");
02476         Terminate(-1);
02477     }
02478 }
02479 M_free(name,"name of include file");
02480 }
02481 AC.NoShowInput = withnolist;
02482 if ( fold ) { M_free(fold,"foldname"); fold = 0; }
02483 return(0);
02484 }
02485
02486 /*
02487 #] Include :
02488 #[ DoPreExchange :
02489
02490 Exchanges the names of expressions or the contents of dollars
02491 Syntax:
02492     #exchange expr1,expr2
02493     #exchange $var1,$var2
02494 */
02495
02496 int DoPreExchange(UBYTE *s)
02497 {
02498     int error = 0;
02499     UBYTE *s1, *s2;
02500     WORD num1, num2;
02501     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02502     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02503     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02504     if ( *s == '$' ) {
02505         s++; s1 = s; while ( FG.cTable[*s] <= 1 ) s++;
02506         if ( *s != ',' && *s != ' ' && *s != '\t' ) goto syntax;
02507         *s++ = 0;
02508         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02509         if ( *s != '$' ) goto syntax;
02510         s++; s2 = s; while ( FG.cTable[*s] <= 1 ) s++;
02511         if ( *s != 0 && *s != ';' ) goto syntax;
02512         *s = 0;
02513         if ( ( num1 = GetDollar(s1) ) <= 0 ) {
02514             MesPrint("@$%s has not been defined (yet)",s1);
02515             error = 1;
02516         }
02517         if ( ( num2 = GetDollar(s2) ) <= 0 ) {
02518             MesPrint("@$%s has not been defined (yet)",s2);
02519             error = 1;
02520         }
02521         if ( error == 0 ) {
02522             ExchangeDollars((int)num1,(int)num2);
02523         }
02524     }
02525     else {
02526         s1 = s; s = SkipAName(s);
02527         if ( *s != ',' && *s != ' ' && *s != '\t' ) goto syntax;
02528         *s++ = 0;
02529         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
02530         if ( FG.cTable[*s] != 0 && *s != '[' ) goto syntax;
02531         s2 = s; s = SkipAName(s);
02532         if ( *s != 0 && *s != ';' ) goto syntax;
02533         *s = 0;
02534         if ( GetName(AC.exprnames,s1,&num1,NOAUTO) != CEXPRESSION ) {
02535             MesPrint("@%s is not an expression",s1);
02536             error = 1;
02537         }
02538         if ( GetName(AC.exprnames,s2,&num2,NOAUTO) != CEXPRESSION ) {
02539             MesPrint("@%s is not an expression",s2);
02540             error = 1;
02541         }
02542         if ( error == 0 ) {
02543             ExchangeExpressions((int)num1,(int)num2);

```

```

02544     }
02545     }
02546     return(error);
02547 syntax:
02548     MesPrint("@Proper syntax: %#exchange expr1,expr2 or %#exchange $var1,$var2");
02549     return(1);
02550 }
02551
02552 /*
02553     #] DoPreExchange :
02554     #[ DoCall :
02555 */
02556
02557 int DoCall(UBYTE *s)
02558 {
02559     UBYTE *t, *u, *v, *name, c, cp, *args1, *args2, *t1, *t2, *wild = 0;
02560     int bratype = 0, wildargs = 0, inwildargs = 0, nwildargs = 0;
02561     PROCEDURE *p;
02562     int streamoffset;
02563     int i, namesize, narg1, narg2, bralevel, numpre;
02564     LONG i1, i2;
02565     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02566     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02567 /*
02568     1: Get the name of the procedure.
02569     2: Locate the procedure.
02570 */
02571     name = s; s = EndOfToken(s); c = *s; *s = 0;
02572     for ( i = NumProcedures-1; i >= 0; i-- ) {
02573         if ( StrCmp(Procedures[i].name,name) == 0 ) break;
02574     }
02575     // AP.ProcList.num = NumProcedures is incremented inside FromList
02576     p = (PROCEDURE *)FromList(&AP.ProcList);
02577     if ( i < 0 ) { /* Try to find a file */
02578         namesize = 0;
02579         t = name;
02580         while ( *t ) { t++; namesize++; }
02581         t = AP.procedureExtension;
02582         while ( *t ) { t++; namesize++; }
02583         t = p->name = (UBYTE *)Malloc1(namesize+2,"procedure");
02584         u = name;
02585         while ( *u ) *t++ = *u++;
02586         *t++ = '.';
02587         v = AP.procedureExtension;
02588         while ( *v ) *t++ = *v++;
02589         *t = 0;
02590         p->loadmode = 0; /* buffer should be freed at end */
02591         p->mustfree = 1;
02592         p->p.buffer = LoadInputFile(p->name,PROCEDUREFILE);
02593         if ( p->p.buffer == 0 ) return(-1);
02594         t[-4] = 0;
02595     }
02596     else {
02597         p->p.buffer = Procedures[i].p.buffer;
02598         p->name = Procedures[i].name;
02599         p->loadmode = 1;
02600         p->mustfree = 0; // this is just a copy of pointers to a permanently stored procedure
02601     }
02602     t = p->p.buffer;
02603     SKIPBLANKS(t)
02604     if ( *t++ != '#' ) goto wrongfile;
02605     SKIPBLANKS(t)
02606     t += 9;
02607     SKIPBLANKS(t)
02608     u = EndOfToken(t);
02609     cp = *u; *u = 0;
02610     if ( StrCmp(t,name) != 0 ) goto wrongfile;
02611     *u = cp;
02612     *s = c;
02613 /*
02614     The pointer p points to the contents of the procedure (in memory)
02615     Now we have to match the arguments. u points to after the name
02616     in the 'file', s to after the name in the call statement.
02617 */
02618     bralevel = narg1 = narg2 = 0; args2 = u;
02619     SKIPBLANKS(u)
02620     if ( *u == '(' ) {
02621         u++; SKIPBLANKS(u)
02622         args2 = u;
02623         while ( *u != ')' ) {
02624             if ( *u == '?' ) { wildargs++; u++; nwildargs = narg2+1; }
02625             narg2++; u = EndOfToken(u); SKIPBLANKS(u)
02626             if ( *u == ',' ) { u++; SKIPBLANKS(u) }
02627             else if ( *u != ')' || ( wildargs > 1 ) ) {
02628                 MesPrint("@Illegal argument field in procedure %s",p->name);
02629                 return(-1);
02630             }

```



```

02631     }
02632 }
02633 while ( *u != LINEFEED ) u++;
02634 SKIPBLANKS(s)
02635 args1 = s+1;
02636 if ( *s == '(' ) bratype = 1;
02637 do {
02638     if ( *s == '{' && bratype == 0 ) bralevel++;
02639     else if ( *s == '(' && bratype == 1 ) bralevel++;
02640     else if ( *s == '}' && bratype == 0 ) {
02641         bralevel--;
02642         if ( bralevel == 0 ) {
02643             *s = 0; nargs1++;
02644             if ( wildargs && nargs1 == nwildargs ) wild = s;
02645         }
02646     }
02647     else if ( *s == ')' && bratype == 1 ) {
02648         bralevel--;
02649         if ( bralevel == 0 ) {
02650             *s = 0; nargs1++;
02651             if ( wildargs && nargs1 == nwildargs ) wild = s;
02652         }
02653     }
02654     /*[12dec2003 mt]:*/
02655     /*else if ( *s == ',' || *s == '|' ) {*/
02656     else if ( set_in(*s,AC.separators) ) { /*Function set_in see in
02657                                         file tools.c*/
02658         /*:[12dec2003 mt]:*/
02659         *s = 0; nargs1++;
02660         if ( wildargs && nargs1 == nwildargs ) wild = s;
02661     }
02662     else if ( *s == '\\\\' ) s++;
02663     s++;
02664 } while ( bralevel > 0 );
02665 if ( wildargs && nargs1 >= nargs2-1 ) {
02666     inwildargs = nargs1-nargs2+1;
02667     if ( inwildargs == 0 ) nwildargs = 0;
02668     else {
02669         while ( inwildargs > 1 ) {
02670             *wild = ',';
02671             while ( *wild ) wild++;
02672             inwildargs--;
02673         }
02674     }
02675 }
02676 else if ( nargs1 != nargs2 && ( nargs2 != 0 || nargs1 != 1 || *args1 != 0 ) ) {
02677     MesPrint("@Arguments of procedure %s are not matching",p->name);
02678     return(-1);
02679 }
02680 numpre = -NumPre-1; /* For the stream */
02681 for ( i = 0; i < nargs2; i++ ) {
02682     t = args2;
02683     if ( *t == '?' ) {
02684         args2++;
02685     }
02686     if ( *t == '?' && inwildargs == 0 ) {
02687         args2 = EndOfToken(args2); c = *args2; *args2 = 0;
02688         if ( PutPreVar(t,(UBYTE *)"",0,0) < 0 ) return(-1);
02689     }
02690     else {
02691         args2 = EndOfToken(args2); c = *args2; *args2 = 0;
02692         t1 = t2 = args1;
02693         while ( *t1 ) {
02694             if ( *t1 == '\\\\' ) t1++;
02695             if ( t1 != t2 ) *t2 = *t1;
02696             t2++; t1++;
02697         }
02698         *t2 = 0;
02699         if ( PutPreVar(t,args1,0,0) < 0 ) return(-1);
02700         args1 = t1+1; /* Next argument */
02701     }
02702     *args2 = c; SKIPBLANKS(args2) /* skip to next name */
02703     args2++; SKIPBLANKS(args2)
02704 }
02705 streamoffset = AC.CurrentStream - AC.Streams;
02706 args1 = AC.CurrentStream->name;
02707 AC.CurrentStream->name = p->name;
02708 i1 = AC.CurrentStream->linenumber;
02709 i2 = AC.CurrentStream->prevline;
02710 AC.CurrentStream->prevline =
02711 AC.CurrentStream->linenumber = 2;
02712 OpenStream(u+1,PREREADSTREAM3,numpre,PRENOACTION);
02713 AC.Streams[streamoffset].name = args1;
02714 AC.Streams[streamoffset].linenumber = i1;
02715 AC.Streams[streamoffset].prevline = i2;
02716 AddToPreTypes(PRETYPEPROCEDURE);
02717 return(0);

```

```

02718 wrongfile;;
02719     if ( i < 0 ) MesPrint("@File %s is not a proper procedure",p->name);
02720     else MesPrint("!!!Internal error with procedure names: %s",name);
02721     return(-1);
02722 }
02723
02724 /*
02725     #] DoCall :
02726     #[ DoDebug :
02727 */
02728
02729 int DoDebug(UBYTE *s)
02730 {
02731     int x;
02732     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02733     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02734     NeedNumber(x,s,nonumber)
02735     if ( x < 0 || x > (PREPROONLY
02736                     | DUMPTOCOMPILER
02737                     | DUMPOUTTERMS
02738                     | DUMPINTERMS
02739                     | DUMPTOSORT
02740                     | DUMPTOPARALLEL
02741 #ifdef WITHPTHREADS
02742                     | THREADSDEBUG
02743 #endif
02744     ) ) goto nonumber;
02745     AP.PreDebug = 0;
02746     if ( ( x & PREPROONLY ) != 0 ) AP.PreDebug |= PREPROONLY; /* 1 */
02747     if ( ( x & DUMPTOCOMPILER ) != 0 ) AP.PreDebug |= DUMPTOCOMPILER; /* 2 */
02748     if ( ( x & DUMPOUTTERMS ) != 0 ) AP.PreDebug |= DUMPOUTTERMS; /* 4 */
02749     if ( ( x & DUMPINTERMS ) != 0 ) AP.PreDebug |= DUMPINTERMS; /* 8 */
02750     if ( ( x & DUMPTOSORT ) != 0 ) AP.PreDebug |= DUMPTOSORT; /* 16 */
02751     if ( ( x & DUMPTOPARALLEL ) != 0 ) AP.PreDebug |= DUMPTOPARALLEL; /* 32 */
02752 #ifdef WITHPTHREADS
02753     if ( ( x & THREADSDEBUG ) != 0 ) AP.PreDebug |= THREADSDEBUG; /* 64 */
02754 #endif
02755     return(0);
02756 nonumber:
02757     MesPrint("@Illegal argument for debug instruction");
02758     return(1);
02759 }
02760
02761 /*
02762     #] DoDebug :
02763     #[ DoTerminate :
02764 */
02765
02766 int DoTerminate(UBYTE *s)
02767 {
02768     int x;
02769     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02770     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02771     if ( *s ) {
02772         NeedNumber(x,s,nonumber)
02773         Terminate(x);
02774     }
02775     else {
02776         Terminate(-1);
02777     }
02778     return(0);
02779 nonumber:
02780     MesPrint("@Illegal argument for terminate instruction");
02781     return(1);
02782 }
02783
02784 /*
02785     #] DoTerminate :
02786     #[ DoContinueDo :
02787 */
02788
02800 int DoContinueDo(UBYTE *s)
02801 {
02802     DOLOOP *loop;
02803     WORD levels;
02804     int result;
02805
02806     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02807     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02808
02809     if ( NumDoLoops <= 0 ) {
02810         MesPrint("@%#continuedo without %#do");
02811         return(1);
02812     }
02813
02814     SkipSpaces(&s);
02815     if ( *s == 0 ) {

```

```

02816         levels = 1;
02817     }
02818     else if ( FG.cTable[*s] == 1 ) {
02819         ParseNumber(levels,s);
02820         SkipSpaces(&s);
02821         if ( *s != 0 ) goto improper;
02822     }
02823     else {
02824 improper:
02825         MesPrint("@Improper syntax of %#continuedo instruction");
02826         return(1);
02827     }
02828
02829     if ( levels > NumDoLoops ) {
02830         MesPrint("@Too many loop levels requested in %#continuedo instruction");
02831         return(1);
02832     }
02833
02834     result = ExitDoLoops(levels-1,"continuedo");
02835     if ( result != 0 ) return(result);
02836
02837     if ( levels <= 0 ) return(0);
02838
02839     if ( AC.CurrentStream->type == PREREADSTREAM3
02840         || AP.PreTypes[AP.NumPreTypes] == PRETYPEPROCEDURE ) {
02841         MesPrint("@Trying to jump out of a procedure with a %#continuedo instruction");
02842         return(1);
02843     }
02844
02845     loop = &(DoLoops[NumDoLoops-1]);
02846     AP.NumPreTypes = loop->NumPreTypes+1;
02847     AP.PreIfLevel = loop->PreIfLevel;
02848     AP.PreSwitchLevel = loop->PreSwitchLevel;
02849
02850     return(DoEnddo(s));
02851 }
02852
02853 /*
02854     #] DoContinueDo :
02855     #[ DoDo :
02856
02857     The do loop has three varieties:
02858     #do i = num1,num2 [,num3]
02859     #do i = {string1,string2,...,stringn}
02860         The | as separator is also allowed for backwards compatibility
02861     #do i = expression      One by one all terms of the expression
02862 */
02863
02864 int DoDo(UBYTE *s)
02865 {
02866     GETIDENTITY
02867     UBYTE *t, c, *u, *uu;
02868     DOLOOP *loop;
02869     WORD expnum;
02870     LONG linenum = AC.CurrentStream->linenumber;
02871     int oldNoShowInput = AC.NoShowInput, i, oldpreassignflag;
02872
02873     if ( ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH )
02874         || ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) ) {
02875         if ( PreSkip((UBYTE *) "do", (UBYTE *) "enddo",1) ) return(-1);
02876         return(0);
02877     }
02878
02879     /*
02880     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
02881     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
02882     */
02883     AddToPreTypes(PRETYPEDO);
02884
02885     loop = (DOLOOP *)FromList(&AP.LoopList);
02886     loop->firstdollar = loop->lastdollar = loop->incdollar = -1;
02887     loop->NumPreTypes = AP.NumPreTypes-1;
02888     loop->PreIfLevel = AP.PreIfLevel;
02889     loop->PreSwitchLevel = AP.PreSwitchLevel;
02890     AC.NoShowInput = 1;
02891     if ( PreLoad(&(loop->p), (UBYTE *) "do", (UBYTE *) "enddo",1,"doloop") ) return(-1);
02892     AC.NoShowInput = oldNoShowInput;
02893     loop->NoShowInput = AC.NoShowInput;
02894     /*
02895     Get now the name. We have to take great care when the name is terminated!
02896     */
02897     s = loop->p.buffer + (s - AP.preStart);
02898     SKIPBLANKS(s)
02899     loop->name = s;
02900     if ( chartype[*s] != 0 ) goto illname;
02901     s++;
02902     while ( chartype[*s] <= 1 ) s++;

```

```

02903     t = s;
02904     while ( *s == ' ' || *s == '\t' ) s++;
02905     if ( *s != '=' ) goto illdo;
02906     s++;
02907     while ( *s == ' ' || *s == '\t' ) s++;
02908     *t = 0;
02909
02910     if ( *s == '{' ) {
02911         loop->type = LISTEDLOOP;
02912         s++; loop->vars = s;
02913         loop->lastnum = 0;
02914         while ( *s != '}' && *s != 0 ) {
02915             if ( set_in(*s,AC.separators) ) { *s = 0; loop->lastnum++; }
02916             else if ( *s == '\\ ' ) s++;
02917             s++;
02918         }
02919         if ( *s == 0 ) goto illdo;
02920         *s++ = 0;
02921         loop->lastnum++;
02922         loop->firstnum = 0;
02923         loop->contents = s;
02924     }
02925     else if ( *s == '-' || *s == '+' || chartype[*s] == 1 || *s == '$' ) {
02926         loop->type = NUMERICLOOP;
02927         t = s;
02928         while ( *s && *s != ',' ) s++;
02929         if ( *s == 0 ) goto illdo;
02930         if ( *t == '$' ) {
02931             c = *s; *s = 0;
02932             if ( GetName(AC.dollarnames,t+1,&loop->firstdollar,NOAUTO) != CDOLLAR ) {
02933                 MesPrint("@%s is undefined in first parameter in %sdo instruction",t);
02934                 return(-1);
02935             }
02936             loop->firstnum = DolToLong(BHEAD loop->firstdollar);
02937             if ( AN.ErrorInDollar ) {
02938                 MesPrint("@%s does not evaluate into a valid loop parameter",t);
02939                 return(-1);
02940             }
02941             *s++ = c;
02942         }
02943         else {
02944             *s = ' ';
02945             if ( PreEval(t,&loop->firstnum) == 0 ) goto illdo;
02946             *s++ = ',';
02947         }
02948         t = s;
02949         while ( *s && *s != ',' && *s != ';' && *s != LINEFEED ) s++;
02950         c = *s;
02951         if ( *t == '$' ) {
02952             *s = 0;
02953             if ( GetName(AC.dollarnames,t+1,&loop->lastdollar,NOAUTO) != CDOLLAR ) {
02954                 MesPrint("@%s is undefined in second parameter in %sdo instruction",t);
02955                 return(-1);
02956             }
02957             loop->lastnum = DolToLong(BHEAD loop->lastdollar);
02958             if ( AN.ErrorInDollar ) {
02959                 MesPrint("@%s does not evaluate into a valid loop parameter",t);
02960                 return(-1);
02961             }
02962             *s++ = c;
02963         }
02964         else {
02965             *s = ' ';
02966             if ( PreEval(t,&loop->lastnum) == 0 ) goto illdo;
02967             *s++ = c;
02968         }
02969         if ( c == ',' ) {
02970             t = s;
02971             while ( *s && *s != ';' && *s != LINEFEED ) s++;
02972             if ( *t == '$' ) {
02973                 c = *s; *s = 0;
02974                 if ( GetName(AC.dollarnames,t+1,&loop->incdollar,NOAUTO) != CDOLLAR ) {
02975                     MesPrint("@%s is undefined in third parameter in %sdo instruction",t);
02976                     return(-1);
02977                 }
02978                 loop->incnum = DolToLong(BHEAD loop->incdollar);
02979                 if ( AN.ErrorInDollar ) {
02980                     MesPrint("@%s does not evaluate into a valid loop parameter",t);
02981                     return(-1);
02982                 }
02983                 *s++ = c;
02984             }
02985             else {
02986                 c = *s; *s = ' ';
02987                 if ( PreEval(t,&loop->incnum) == 0 ) goto illdo;
02988                 *s++ = c;
02989             }
02990         }
02991     }

```

```

02990     }
02991     else loop->incnum = 1;
02992     loop->contents = s;
02993 }
02994 else if ( ( chartye[*s] == 0 ) || ( *s == '[' ) ) {
02995     int oldNumPotModdollars = NumPotModdollars;
02996 #ifdef WITHMPI
02997     WORD oldRhsExprInModuleFlag = AC.RhsExprInModuleFlag;
02998     AC.RhsExprInModuleFlag = 0;
02999 #endif
03000     t = s;
03001     if ( ( s = SkipAName(s) ) == 0 ) goto illdo;
03002     c = *s; *s = 0;
03003     if ( GetName(AC.exprnames,t,&expnum,NOAUTO) == CEXPRESSION ) {
03004         loop->type = ONEEXPRESSION;
03005     /*
03006         We should remember the expression by name for when it gets
03007         renumbered!!! If it gets deleted there will be a crash or at
03008         least the loop terminates.
03009     */
03010         loop->vars = t;
03011     }
03012     else goto illdo;
03013     if ( c == ',' || c == '\t' || c == ';' ) { s++; }
03014     else if ( c != 0 && c != '\n' ) goto illdo;
03015     while ( *s == ',' || *s == '\t' || *s == ';' ) s++;
03016     if ( *s != 0 && *s != '\n' ) goto illdo;
03017     loop->firstnum = 0;
03018     s++;
03019     loop->contents = s;
03020     loop->incnum = 0;
03021     /*
03022         Next determine size of statement and allocate space
03023     */
03024     while ( *t ) t++;
03025     i = t - loop->vars;
03026     t = loop->name;
03027     while ( *t ) { t++; i++; }
03028     i += 4;
03029     loop->dollarname = Malloc1((LONG)i,"do-loop instruction");
03030     /*
03031         Construct the statement
03032     */
03033     u = loop->dollarname;
03034     *u++ = '$'; t = loop->name; while ( *t ) *u++ = *t++;
03035     *u++ = '_'; uu = u; *u++ = '='; t = loop->vars;
03036     while ( *t ) *u++ = *t++;
03037     *t = 0; *u = 0;
03038     /*
03039         Compile and put in dollar variable.
03040         Note that we remember the dollar by name and that this name ends in _
03041     */
03042     oldpreassignflag = AP.PreAssignFlag;
03043     AP.PreAssignFlag = 2;
03044     CompileStatement(loop->dollarname);
03045     if ( CatchDollar(0) ) {
03046         MesPrint("@Cannot load expression in do loop");
03047         return(-1);
03048     }
03049     AP.PreAssignFlag = oldpreassignflag;
03050     NumPotModdollars = oldNumPotModdollars;
03051 #ifdef WITHMPI
03052     AC.RhsExprInModuleFlag = oldRhsExprInModuleFlag;
03053 #endif
03054     *uu = 0;
03055 }
03056 else goto illdo; /* Syntax problems */
03057 loop->errorsinloop = 0;
03058 /* loop->startlinenumber = linenum+1; 5-oct-2000 One too much? */
03059 loop->startlinenumber = linenum;
03060 PutPreVar(loop->name, (UBYTE *)"0",0,0);
03061 loop->firstloopcall = 1;
03062 return(DoEnddo(s));
03063 illname:;
03064 MesPrint("@Improper name for do loop variable");
03065 return(-1);
03066 illdo:;
03067 MesPrint("@Improper syntax in do loop instruction");
03068 return(-1);
03069 }
03070
03071 /*
03072     #] DoDo :
03073     #[ DoBreakDo :
03074
03075     #breakdo [num]
03076         jumps out of num #do-loops (if there are that many) (default is 1)

```

```

03077 */
03078
03079 int DoBreakDo(UBYTE *s)
03080 {
03081     WORD levels;
03082
03083     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03084     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03085
03086     if ( NumDoLoops <= 0 ) {
03087         MesPrint("@%#breakdo without %#do");
03088         return(1);
03089     }
03090 /*
03091     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEDO ) { MessPreNesting(4); return(-1); }
03092 */
03093     while ( *s && ( *s == ' ' || *s == ' ' || *s == '\t' ) ) s++;
03094     if ( *s == 0 ) {
03095         levels = 1;
03096     }
03097     else if ( FG.cTable[*s] == 1 ) {
03098         levels = 0;
03099         while ( *s >= '0' && *s <= '9' ) { levels = 10*levels + *s++ - '0'; }
03100         if ( *s != 0 ) goto improper;
03101     }
03102     else {
03103 improper:
03104         MesPrint("@Improper syntax of %#breakdo instruction");
03105         return(1);
03106     }
03107     if ( levels > NumDoLoops ) {
03108         MesPrint("@Too many loop levels requested in %#breakdo instruction");
03109         Terminate(-1);
03110     }
03111     return(ExitDoLoops(levels, "breakdo"));
03112 }
03113
03121 static int ExitDoLoops(int levels, const char *instruction)
03122 {
03123     DOLOOP *loop;
03124     while ( levels > 0 ) {
03125         while ( AC.CurrentStream->type != PREREADSTREAM
03126             && AC.CurrentStream->type != PREREADSTREAM2
03127             && AC.CurrentStream->type != PREREADSTREAM3 ) {
03128             AC.CurrentStream = CloseStream(AC.CurrentStream);
03129         }
03130         while ( AP.PreTypes[AP.NumPreTypes] != PRETYPEDO
03131             && AP.PreTypes[AP.NumPreTypes] != PRETYPEPROCEDURE ) AP.NumPreTypes--;
03132         if ( AC.CurrentStream->type == PREREADSTREAM3
03133             || AP.PreTypes[AP.NumPreTypes] == PRETYPEPROCEDURE ) {
03134             MesPrint("@Trying to jump out of a procedure with a %s instruction", instruction);
03135             return(1);
03136         }
03137         loop = &(DoLoops[NumDoLoops-1]);
03138         AP.NumPreTypes = loop->NumPreTypes;
03139         AP.PreIfLevel = loop->PreIfLevel;
03140         AP.PreSwitchLevel = loop->PreSwitchLevel;
03141         NumDoLoops--;
03142         DoUndefine(loop->name);
03143         M_free(loop->p.buffer, "loop->p.buffer");
03144         loop->firstloopcall = 0;
03145
03146         AC.CurrentStream = CloseStream(AC.CurrentStream);
03147         levels--;
03148     }
03149     return(0);
03150 }
03151
03152 /*
03153     #] DoBreakDo :
03154     #[ DoElse :
03155 */
03156
03157 int DoElse(UBYTE *s)
03158 {
03159     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEIF ) {
03160         if ( AP.PreIfLevel <= 0 ) MesPrint("@%#else without corresponding %#if");
03161         else MessPreNesting(1);
03162         return(-1);
03163     }
03164     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03165     while ( *s == ' ' ) s++;
03166     if ( tolower(*s) == 'i' && tolower(s[1]) == 'f' && s[2]
03167         && FG.cTable[s[2]] > 1 && s[2] != '_' ) {
03168         s += 2;
03169         while ( *s == ' ' ) s++;
03170         return(DoElseif(s));
03171     }

```

```

03171     }
03172     if ( AP.PreIfLevel <= 0 ) {
03173         MesPrint("@%#else without corresponding %if");
03174         return(-1);
03175     }
03176     switch ( AP.PreIfStack[AP.PreIfLevel] ) {
03177         case EXECUTINGIF:
03178             AP.PreIfStack[AP.PreIfLevel] = LOOKINGFORENDIF;
03179             break;
03180         case LOOKINGFORELSE:
03181             AP.PreIfStack[AP.PreIfLevel] = EXECUTINGIF;
03182             break;
03183         case LOOKINGFORENDIF:
03184             break;
03185     }
03186     return(0);
03187 }
03188
03189 /*
03190     #] DoElse :
03191     #[ DoElseif :
03192 */
03193
03194 int DoElseif(UBYTE *s)
03195 {
03196     int condition;
03197     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEIF ) {
03198         if ( AP.PreIfLevel <= 0 ) MesPrint("@%#elseif without corresponding %if");
03199         else MessPreNesting(2);
03200         return(-1);
03201     }
03202     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03203     if ( AP.PreIfLevel <= 0 ) {
03204         MesPrint("@%#elseif without corresponding %if");
03205         return(-1);
03206     }
03207     switch ( AP.PreIfStack[AP.PreIfLevel] ) {
03208         case EXECUTINGIF:
03209             AP.PreIfStack[AP.PreIfLevel] = LOOKINGFORENDIF;
03210             break;
03211         case LOOKINGFORELSE:
03212             if ( ( condition = EvalPreIf(s) ) < 0 ) return(-1);
03213             AP.PreIfStack[AP.PreIfLevel] = condition;
03214             break;
03215         case LOOKINGFORENDIF:
03216             break;
03217     }
03218     return(0);
03219 }
03220
03221 /*
03222     #] DoElseif :
03223     #[ DoEnddo :
03224
03225     At the first call there is no stream yet.
03226     After that we have to close the stream and start a new one.
03227 */
03228
03229 int DoEnddo(UBYTE *s)
03230 {
03231     GETIDENTITY
03232     DOLOOP *loop;
03233     UBYTE *t, *tt, *value, numstr[16];
03234     LONG xval;
03235     int xsign, retval;
03236     DUMMYUSE(s);
03237     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03238     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03239     /*
03240     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ||
03241         AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) {
03242         if ( AP.PreTypes[AP.NumPreTypes] == PRETYPEPEDO ) AP.NumPreTypes--;
03243         else { MessPreNesting(3); return(-1); }
03244         return(0);
03245     }
03246     */
03247     if ( NumDoLoops <= 0 ) {
03248         MesPrint("@%#enddo without %do");
03249         return(1);
03250     }
03251     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEPEDO ) { MessPreNesting(4); return(-1); }
03252     loop = &(DoLoops[NumDoLoops-1]);
03253     if ( !loop->firstloopcall ) AC.CurrentStream = CloseStream(AC.CurrentStream);
03254
03255     if ( loop->errorsinloop ) {
03256         MesPrint("++++Errors in Loop");
03257         goto finish;

```

```

03258     }
03259     if ( loop->type == LISTEDLOOP ) {
03260         if ( loop->firstnum >= loop->lastnum ) goto finish;
03261         loop->firstnum++;
03262         t = value = loop->vars;
03263         while ( *value ) value++;
03264         value++;
03265         loop->vars = value;
03266         value = tt = t;
03267         while ( *value ) {
03268             if ( *value == '\\\\' ) value++;
03269             *tt++ = *value++;
03270         }
03271         *tt = 0;
03272         PutPreVar(loop->name,t,0,1); /* We overwrite the definition */
03273     }
03274     else if ( loop->type == NUMERICALLOOP ) {
03275
03276         if ( !loop->firstloopcall ) {
03277             /*
03278              Test whether the variable was changed inside the loop into
03279              a different numerical value. If so, adjust.
03280             */
03281             t = GetPreVar(loop->name,WITHOUTERROR);
03282             if ( t ) {
03283                 value = t;
03284                 xsign = 1;
03285                 while ( *value && ( *value == ' ' || *value == '-' || *value == '+' ) ) {
03286                     if ( *value == '-' ) xsign = -xsign;
03287                     value++;
03288                 }
03289                 t = value; xval = 0;
03290                 while ( *value >= '0' && *value <= '9' ) xval = 10*xval + *value++ - '0';
03291                 while ( *value && *value == ' ' ) value++;
03292                 if ( *value == 0 ) {
03293                     /*
03294                      Now we may substitute the loopvalue.
03295                     */
03296                     if ( xsign < 0 ) xval = -xval;
03297                     if ( loop->incdollar >= 0 ) {
03298                         loop->incnum = DolToLong(BHEAD loop->incdollar);
03299                         if ( AN.ErrorInDollar ) {
03300                             MesPrint("@%s does not evaluate into a valid third loop
03301 parameter",DOLLARNAME(Dollars,loop->incdollar));
03302                             return(-1);
03303                         }
03304                     }
03305                     loop->firstnum = xval + loop->incnum;
03306                 }
03307             }
03308             if ( loop->lastdollar >= 0 ) {
03309                 loop->lastnum = DolToLong(BHEAD loop->lastdollar);
03310                 if ( AN.ErrorInDollar ) {
03311                     MesPrint("@%s does not evaluate into a valid second loop
03312 parameter",DOLLARNAME(Dollars,loop->lastdollar));
03313                     return(-1);
03314                 }
03315             }
03316             if ( ( loop->incnum > 0 && loop->firstnum > loop->lastnum )
03317                 || ( loop->incnum < 0 && loop->firstnum < loop->lastnum ) ) goto finish;
03318             NumToStr(numstr,loop->firstnum);
03319             t = numstr;
03320             loop->firstnum += loop->incnum;
03321             PutPreVar(loop->name,t,0,1); /* We overwrite the definition */
03322         }
03323     }
03324     else if ( loop->type == ONEEXPRESSION ) {
03325         /*
03326         Find the dollar expression
03327         */
03328         WORD numdollar = GetDollar(loop->dollarname+1);
03329         DOLLARS d = Dollars + numdollar;
03330         WORD *w, *dw, v, *ww;
03331         if ( (d->where) == 0 ) {
03332             d->type = DOLUNDEFINED;
03333             M_free(loop->dollarname,"do-loop instruction");
03334             goto finish;
03335         }
03336         w = d->where + loop->incnum;
03337         if ( *w == 0 ) {
03338             M_free(d->where,"dollar");
03339             d->where = 0;
03340             d->type = DOLUNDEFINED;
03341             M_free(loop->dollarname,"do-loop instruction");
03342             goto finish;
03343         }
03344     }

```



```

03343         loop->incnum += *w;
03344     /*
03345         Now the term has to be converted to text.
03346     */
03347         ww = w + *w; v = *ww; *ww = 0;
03348         dw = d->where; d->where = w;
03349         t = WriteDollarToBuffer(numdollar,1);
03350         d->where = dw; *ww = v;
03351         PutPreVar(loop->name,t,0,1);    /* We overwrite the definition */
03352         M_free(t,"dollar");
03353     }
03354     if ( loop->firstloopcall ) OpenStream(loop->contents,PREREADSTREAM2,0,PRENOACTION);
03355     else OpenStream(loop->contents,PREREADSTREAM,0,PRENOACTION);
03356     AC.CurrentStream->prevline =
03357     AC.CurrentStream->linenumber = loop->startlinenumber;
03358     AC.CurrentStream->eqnum = 0;
03359     loop->firstloopcall = 0;
03360     return(0);
03361 finish:;
03362     NumDoLoops--;
03363     retval = DoUndefine(loop->name);
03364     M_free(loop->p.buffer,"loop->p.buffer");
03365     loop->firstloopcall = 0;
03366     AP.NumPreTypes--;
03367     return(retval);
03368 }
03369
03370 /*
03371     #] DoEnddo :
03372     #[ DoEndif :
03373 */
03374
03375 int DoEndif(UBYTE *s)
03376 {
03377     DUMMYUSE(s);
03378     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEIF ) {
03379         if ( AP.PreIfLevel <= 0 ) MesPrint("@%#endif without corresponding %#if");
03380         else MessPreNesting(5);
03381         return(-1);
03382     }
03383     AP.NumPreTypes--;
03384     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03385     if ( AP.PreIfLevel <= 0 ) {
03386         MesPrint("@%#endif without corresponding %#if");
03387         return(-1);
03388     }
03389     AP.PreIfLevel--;
03390     return(0);
03391 }
03392
03393 /*
03394     #] DoEndif :
03395     #[ DoEndprocedure :
03396
03397     Action is simple: close the current stream if it is still
03398     the stream from which the statement came.
03399     Then pop the current procedure and all its local derivatives.
03400     if loadmode > 1 the procedure was defined locally.
03401 */
03402
03403 int DoEndprocedure(UBYTE *s)
03404 {
03405     DUMMYUSE(s);
03406     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEPROCEDURE ) {
03407         MessPreNesting(6);
03408         return(-1);
03409     }
03410     AP.NumPreTypes--;
03411     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03412     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03413     AC.CurrentStream = CloseStream(AC.CurrentStream);
03414
03415     do {
03416         NumProcedures--;
03417         if ( Procedures[NumProcedures].mustfree == 1 ) {
03418             M_free(Procedures[NumProcedures].p.buffer,"procedures buffer");
03419             M_free(Procedures[NumProcedures].name,"procedures name");
03420         }
03421     } while ( Procedures[NumProcedures].loadmode > 1 );
03422     return(0);
03423 }
03424
03425 /*
03426     #] DoEndprocedure :
03427     #[ DoIf :
03428 */
03429

```

```

03430 int DoIf(UBYTE *s)
03431 {
03432     int condition;
03433     AddToPreTypes(PRETYPEIF);
03434     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03435     if ( AP.PreIfStack[AP.PreIfLevel] == EXECUTINGIF ) {
03436         condition = EvalPreIf(s);
03437         if ( condition < 0 ) return(-1);
03438     }
03439     else condition = LOOKINGFORENDIF;
03440     if ( AP.PreIfLevel+1 >= AP.MaxPreIfLevel ) {
03441         int **ppp = &AP.PreIfStack; /* To avoid a compiler warning */
03442         if ( DoubleList((void ***)ppp,&AP.MaxPreIfLevel,sizeof(int),
03443             "PreIfLevels") ) return(-1);
03444     }
03445     AP.PreIfStack[++AP.PreIfLevel] = condition;
03446     return(0);
03447 }
03448
03449 /*
03450     #] DoIf :
03451     #[ DoIfdef :
03452 */
03453
03454 int DoIfdef(UBYTE *s, int par)
03455 {
03456     int condition;
03457     AddToPreTypes(PRETYPEIF);
03458     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03459     if ( AP.PreIfStack[AP.PreIfLevel] == EXECUTINGIF ) {
03460         while ( *s == ' ' || *s == '\t' ) s++;
03461         if ( ( *s == 0 ) == ( par == 1 ) ) condition = LOOKINGFORELSE;
03462         else condition = EXECUTINGIF;
03463     }
03464     else condition = LOOKINGFORENDIF;
03465     if ( AP.PreIfLevel+1 >= AP.MaxPreIfLevel ) {
03466         int **ppp = &AP.PreIfStack; /* to avoid a compiler warning */
03467         if ( DoubleList((void ***)ppp,&AP.MaxPreIfLevel,sizeof(int),
03468             "PreIfLevels") ) return(-1);
03469     }
03470     AP.PreIfStack[++AP.PreIfLevel] = condition;
03471     return(0);
03472 }
03473
03474 /*
03475     #] DoIfdef :
03476     #[ DoIfydef :
03477 */
03478
03479 int DoIfydef(UBYTE *s)
03480 {
03481     return DoIfdef(s,1);
03482 }
03483
03484 /*
03485     #] DoIfydef :
03486     #[ DoIfndef :
03487 */
03488
03489 int DoIfndef(UBYTE *s)
03490 {
03491     return DoIfdef(s,2);
03492 }
03493
03494 /*
03495     #] DoIfndef :
03496     #[ DoInside :
03497
03498     #inside $var1,...,$varn
03499     statements without .sort
03500     #endinside
03501
03502     executes the statements on the contents of the $ variables as if they
03503     are a module. The results are put back in the dollar variables.
03504     To do this right we need a struct with
03505         old compiler buffer
03506         list of numbers of dollars
03507         length of the list
03508         length of the array containing the list
03509     Because we need to compose statements, the statement buffer must be
03510     empty. This means that we have to test for that. Same at the end. We
03511     must have a completed statement.
03512 */
03513
03514 int DoInside(UBYTE *s)
03515 {
03516     GETIDENTITY

```

```

03517     int numdol, error = 0;
03518     WORD *nb, newsiz, i;
03519     UBYTE *name, c;
03520     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03521     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03522     if ( AP.PreInsideLevel != 0 ) {
03523         MesPrint("@Illegal nesting of %inside/%endinside instructions");
03524         return(-1);
03525     }
03526     /*
03527     if ( AP.PreContinuation ) {
03528         error = -1;
03529         MesPrint("@%inside cannot be inside a regular statement");
03530     }
03531     */
03532     PUSHPREASSIGNLEVEL
03533     /*
03534     Now the dollars to do
03535     */
03536     AP.inside.numdollars = 0;
03537     for(;;) {
03538         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
03539         if ( *s == 0 ) break;
03540         if ( *s != '$' ) {
03541             MesPrint("@%inside instruction can have only $ variables for parameters");
03542             return(-1);
03543         }
03544         s++;
03545         name = s;
03546         while (chartype[*s] <= 1 ) s++;
03547         c = *s; *s = 0;
03548         if ( ( numdol = GetDollar(name) ) < 0 ) {
03549             MesPrint("@%inside: $%s has not (yet) been defined",name);
03550             *s = c;
03551             error = -1;
03552         }
03553         else {
03554             *s = c;
03555             if ( AP.inside.numdollars >= AP.inside.size ) {
03556                 if ( AP.inside.buffer == 0 ) newsiz = 20;
03557                 else newsiz = 2*AP.inside.size;
03558                 nb = (WORD *)Malloca(newsiz*sizeof(WORD),"insidebuffer");
03559                 if ( AP.inside.buffer ) {
03560                     for ( i = 0; i < AP.inside.size; i++ ) nb[i] = AP.inside.buffer[i];
03561                     M_free(AP.inside.buffer,"insidebuffer");
03562                 }
03563                 AP.inside.buffer = nb;
03564                 AP.inside.size = newsiz;
03565             }
03566             AP.inside.buffer[AP.inside.numdollars++] = numdol;
03567         }
03568     }
03569     /*
03570     We have to store the configuration of the compiler buffer, so that
03571     we know where to start executing and how to reset the buffer.
03572     */
03573     AP.inside.oldcompletetype = AC.completetype;
03574     AP.inside.oldparalelflag = AC.mparalelflag;
03575     AP.inside.oldnumpotmoddollars = NumPotModdollars;
03576     AP.inside.olddcbuf = AC.cbdbuf;
03577     AP.inside.olddrbuf = AM.rdbuf;
03578     AP.inside.olddcnulhs = AR.Cnulhs;
03579     AddToPreTypes(PRETYPEINSIDE);
03580     AP.PreInsideLevel = 1;
03581     AC.cbdbuf = AP.inside.insdbuf;
03582     AM.rdbuf = AP.inside.insdbuf;
03583     clearcbuf(AC.cbdbuf);
03584     AC.completetype = 0;
03585     AC.mparalelflag = PARALLELFLAG;
03586     #ifdef WITHMPI
03587     /*
03588     * We use AC.RhsExprInModuleFlag, PotModdollars, and AC.pfirstnum
03589     * in order to check (1) whether there are expression names in RHS,
03590     * (2) which dollar variables can be modified, and (3) which
03591     * preprocessor variables can be redefined, in #inside.
03592     * We store the current values of them, and then reset them.
03593     */
03594     PF_StoreInsideInfo();
03595     AC.RhsExprInModuleFlag = 0;
03596     NumPotModdollars = 0;
03597     AC.numfirstnum = 0;
03598     #endif
03599     return(error);
03600 }
03601
03602 /*
03603     #] DoInside :

```

```

03604         # [ DoEndInside :
03605         /*
03606
03607 int DoEndInside(UBYTE *s)
03608 {
03609     GETIDENTITY
03610     WORD numdol, *oldworkpointer = AT.WorkPointer, *term, *t, j, i;
03611     DOLLARS d, nd;
03612     WORD oldbracketon = AR.BracketOn;
03613     WORD *oldcompresspointer = AR.CompressPointer;
03614     int oldmultithreaded = AS.MultiThreaded;
03615     /* int oldmparallelflag = AC.mparallelflag; */
03616     FILEHANDLE *f;
03617 #ifdef WITHMPI
03618     int error = 0;
03619 #endif
03620     DUMMYUSE(s);
03621     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03622     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03623     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPEINSIDE ) {
03624         if ( AP.PreInsideLevel != 1 ) MesPrint("@%#endinside without corresponding %#inside");
03625         else MessPreNesting(11);
03626         return(-1);
03627     }
03628     AP.NumPreTypes--;
03629     if ( AP.PreInsideLevel != 1 ) {
03630         MesPrint("@%#endinside without corresponding %#inside");
03631         return(-1);
03632     }
03633     if ( AP.PreContinuation ) {
03634         MesPrint("@%#endinside: previous statement not terminated.");
03635         Terminate(-1);
03636     }
03637     AC.compiletype = AP.inside.oldcompiletype;
03638     AR.Cnumlhs = cbuf[AM.rbufnum].numlhs;
03639 #ifdef WITHMPI
03640     /*
03641     * If the #inside...#endinside contains expressions in RHS, only the master executes it
03642     * and then broadcasts the result to the all slaves. If not, the all processes execute
03643     * it and in this case no MPI interactions are needed.
03644     */
03645     if ( PF.me == MASTER || !AC.RhsExprInModuleFlag ) {
03646 #endif
03647         AR.BracketOn = 0;
03648         AS.MultiThreaded = 0;
03649         /* AC.mparallelflag = PARALLELFLAG; */
03650         if ( AR.CompressPointer == 0 ) AR.CompressPointer = AR.CompressBuffer;
03651         f = AR.infile; AR.infile = AR.outfile; AR.outfile = f;
03652     /*
03653     Now we have to execute the statements on the proper dollars.
03654     */
03655     for ( i = 0; i < AP.inside.numdollars; i++ ) {
03656         numdol = AP.inside.buffer[i];
03657         nd = d = Dollars + numdol;
03658         if ( d->type != DOLZERO ) {
03659             if ( d->type != DOLTERMS ) nd = DolToTerms(BHEAD numdol);
03660             term = nd->where;
03661             NewSort(BHEAD0);
03662             NewSort(BHEAD0);
03663             AR.MaxDum = AM.IndDum;
03664             while ( *term ) {
03665                 t = oldworkpointer; j = *term;
03666                 NCOPY(t,term,j);
03667                 AT.WorkPointer = t;
03668                 AN.IndDum = AM.IndDum;
03669                 AR.CurDum = ReNumber(BHEAD term);
03670                 if ( Generator(BHEAD oldworkpointer,0) ) {
03671                     MesPrint("@Called from %#endinside");
03672                     MesPrint("@Evaluating variable %s",DOLLARNAME(Dollars,numdol));
03673                     Terminate(-1);
03674                 }
03675             }
03676             AT.WorkPointer = oldworkpointer;
03677             CleanDollarFactors(d);
03678             if ( d->where ) { M_free(d->where,"dollar contents"); d->where = 0; }
03679             EndSort(BHEAD (WORD *) ((void *) (&(d->where))),2);
03680             LowerSortLevel();
03681             term = d->where; while ( *term ) term += *term;
03682             d->size = term - d->where;
03683             if ( nd != d ) M_free(nd,"Copy of dollar variable");
03684             if ( d->where[0] == 0 ) {
03685                 M_free(d->where,"dollar contents"); d->where = 0;
03686                 d->type = DOLZERO;
03687             }
03688         }
03689     }
03690 #ifdef WITHMPI

```

```

03691     }
03692     if ( AC.RhsExprInModuleFlag ) {
03693         /*
03694          * The only master executed the statements in #inside.
03695          * We need to broadcast the result to the all slaves.
03696          */
03697         for ( i = 0; i < AP.inside.numdollars; i++ ) {
03698             /*
03699              * Mark $-variables specified in the #inside instruction as modified
03700              * such that they will be broadcast.
03701              */
03702             AddPotModdollar(AP.inside.buffer[i]);
03703         }
03704         /* Now actual broadcast of modified variables. */
03705         if ( NumPotModdollars > 0 ) {
03706             error = PF_BroadcastModifiedDollars();
03707             if ( error ) goto cleanup;
03708         }
03709         if ( AC.numpfirstnum > 0 ) {
03710             error = PF_BroadcastRedefinedPreVars();
03711             if ( error ) goto cleanup;
03712         }
03713     }
03714 cleanup:
03715 #endif
03716     f = AR.infile; AR.infile = AR.outfile; AR.outfile = f;
03717     AC.cbufnum = AP.inside.oldcbuf;
03718     AM.rbufnum = AP.inside.ldrbuf;
03719     AR.Cnumlhs = AP.inside.oldcnumlhs;
03720     AR.BraceOn = oldbracketon;
03721     AP.PreInsideLevel = 0;
03722     AR.CompressPointer = oldcompresspointer;
03723     AS.MultiThreaded = oldmultithreaded;
03724     AC.mparallelflag = AP.inside.oldparallelflag;
03725     NumPotModdollars = AP.inside.oldnumpotmoddollars;
03726     POPPREASSIGNLEVEL
03727 #ifdef WITHMPI
03728     PF_RestoreInsideInfo();
03729     if ( error ) return error;
03730 #endif
03731     return(0);
03732 }
03733
03734 /*
03735      #] DoEndInside :
03736      #[ DoMessage :
03737 */
03738
03739 int DoMessage(UBYTE *s)
03740 {
03741     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03742     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03743     while ( *s == ' ' || *s == '\t' ) s++;
03744     MesPrint("~~~%s",s);
03745     return(0);
03746 }
03747
03748 /*
03749      #] DoMessage :
03750      #[ DoPipe :
03751 */
03752
03753 int DoPipe(UBYTE *s)
03754 {
03755     #ifndef WITHPIPE
03756         DUMMYUSE(s);
03757     #endif
03758     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03759     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03760     #ifdef WITHPIPE
03761         FLUSHCONSOLE;
03762         while ( *s == ' ' || *s == '\t' ) s++;
03763         if ( OpenStream(s,PIPESTREAM,0,PREENOACTION) == 0 ) return(-1);
03764         return(0);
03765     #else
03766         Error0("Pipes not implemented on this computer/system");
03767         return(-1);
03768     #endif
03769 }
03770
03771 /*
03772      #] DoPipe :
03773      #[ DoPrcExtension :
03774 */
03775
03776 int DoPrcExtension(UBYTE *s)
03777 {

```

```

03778     UBYTE *t, *u, c;
03779     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03780     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03781     while ( *s == ' ' || *s == '\t' ) s++;
03782     if ( *s == 0 || *s == '\n' ) {
03783         MesPrint("@No valid procedure extension specified");
03784         return(-1);
03785     }
03786     if ( FG.cTable[*s] != 0 ) {
03787         MesPrint("@Procedure extension should be a string starting with an alphabetic character. No
whitespace.");
03788         return(-1);
03789     }
03790     t = s;
03791     while ( *s && *s != '\n' && *s != ' ' && *s != '\t' ) s++;
03792     u = s;
03793     while ( *s == ' ' || *s == '\t' ) s++;
03794     if ( *s != 0 && *s != '\n' ) {
03795         MesPrint("@Too many parameters in ProcedureExtension instruction");
03796         return(-1);
03797     }
03798     c = *u; *u = 0;
03799     if ( AP.procedureExtension ) M_free(AP.procedureExtension, "ProcedureExtension");
03800     AP.procedureExtension = strDupl(t, "ProcedureExtension");
03801     *u = c;
03802     return(0);
03803 }
03804
03805 /*
03806     #] DoPrCExtension :
03807     #[ DoPreOut :
03808 */
03809
03810 int DoPreOut(UBYTE *s)
03811 {
03812     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03813     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03814     if ( tolower(*s) == 'o' ) {
03815         if ( tolower(s[1]) == 'n' && s[2] == 0 ) {
03816             AP.PreOut = 1;
03817             return(0);
03818         }
03819         if ( tolower(s[1]) == 'f' && tolower(s[2]) == 'f' && s[3] == 0 ) {
03820             AP.PreOut = 0;
03821             return(0);
03822         }
03823     }
03824     MesPrint("@Illegal option in PreOut instruction");
03825     return(-1);
03826 }
03827
03828 /*
03829     #] DoPreOut :
03830     #[ DoPrePrintTimes :
03831 */
03832
03833 int DoPrePrintTimes(UBYTE *s)
03834 {
03835     DUMMYUSE(s);
03836     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03837     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03838     PrintRunningTime();
03839     return(0);
03840 }
03841
03842 /*
03843     #] DoPrePrintTimes :
03844     #[ DoPreSortReallocate :
03845 */
03846
03847 int DoPreSortReallocate(UBYTE *s)
03848 {
03849     DUMMYUSE(s);
03850     if ( AC.SortReallocateFlag == 0 ) {
03851         /* Currently off, so set to 2. Then the reallocation code knows the flag was
03852            set here, since "On sortreallocate;" sets it to 1. */
03853         AC.SortReallocateFlag = 2;
03854     }
03855     /* If the flag is already on, do nothing. */
03856     return(0);
03857 }
03858
03859 /*
03860     #] DoPreSortReallocate :
03861     #[ DoPreAppend :
03862
03863     Syntax:

```

```

03864         #append <filename>
03865     */
03866
03867 int DoPreAppend(UBYTE *s)
03868 {
03869     UBYTE *name, *to;
03870
03871     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03872     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03873     if ( AP.preError ) return(0);
03874     while ( *s == ' ' || *s == '\t' ) s++;
03875 /*
03876     Determine where to write
03877 */
03878     if ( *s == '<' ) {
03879         s++;
03880         name = to = s;
03881         while ( *s && *s != '>' ) {
03882             if ( *s == '\\' ) s++;
03883             *to++ = *s++;
03884         }
03885         if ( *s == 0 ) {
03886             MesPrint("@Improper termination of filename");
03887             return(-1);
03888         }
03889         s++;
03890         *to = 0;
03891         if ( *name ) { GetAppendChannel((char *)name); }
03892         else goto improper;
03893     }
03894     else {
03895 improper:
03896         MesPrint("@Proper syntax is: %#append <filename>");
03897         return(-1);
03898     }
03899     return(0);
03900 }
03901
03902 /*
03903     #] DoPreAppend :
03904     #[ DoPreCreate :
03905
03906     Syntax:
03907     #create <filename>
03908 */
03909
03910 int DoPreCreate(UBYTE *s)
03911 {
03912     UBYTE *name, *to;
03913
03914     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03915     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03916     if ( AP.preError ) return(0);
03917     while ( *s == ' ' || *s == '\t' ) s++;
03918 /*
03919     Determine where to write
03920 */
03921     if ( *s == '<' ) {
03922         s++;
03923         name = to = s;
03924         while ( *s && *s != '>' ) {
03925             if ( *s == '\\' ) s++;
03926             *to++ = *s++;
03927         }
03928         if ( *s == 0 ) {
03929             MesPrint("@Improper termination of filename");
03930             return(-1);
03931         }
03932         s++;
03933         *to = 0;
03934         if ( *name ) { GetChannel((char *)name,0); }
03935         else goto improper;
03936     }
03937     else {
03938 improper:
03939         MesPrint("@Proper syntax is: %#create <filename>");
03940         return(-1);
03941     }
03942     return(0);
03943 }
03944
03945 /*
03946     #] DoPreCreate :
03947     #[ DoPreRemove :
03948 */
03949
03950 int DoPreRemove(UBYTE *s)

```

```

03951 {
03952     UBYTE *name, *to;
03953     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03954     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03955     if ( AP.preError ) return(0);
03956     while ( *s == ' ' || *s == '\t' ) s++;
03957     if ( *s == '<' ) { s++; }
03958     else {
03959         MesPrint("@Proper syntax is: %#remove <filename>");
03960         return(-1);
03961     }
03962     name = to = s;
03963     while ( *s && *s != '>' ) {
03964         if ( *s == '\\\\' ) s++;
03965         *to++ = *s++;
03966     }
03967     if ( *s == 0 ) {
03968         MesPrint("@Improper filename");
03969         return(-1);
03970     }
03971     s++;
03972     *to = 0;
03973     CloseChannel((char *)name);
03974     remove((char *)name);
03975     return(0);
03976 }
03977
03978 /*
03979     #] DoPreRemove :
03980     #[ DoPreClose :
03981 */
03982
03983 int DoPreClose(UBYTE *s)
03984 {
03985     UBYTE *name, *to;
03986     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
03987     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
03988     if ( AP.preError ) return(0);
03989     while ( *s == ' ' || *s == '\t' ) s++;
03990     if ( *s == '<' ) { s++; }
03991     else {
03992         MesPrint("@Proper syntax is: %#close <filename>");
03993         return(-1);
03994     }
03995     name = to = s;
03996     while ( *s && *s != '>' ) {
03997         if ( *s == '\\\\' ) s++;
03998         *to++ = *s++;
03999     }
04000     if ( *s == 0 ) {
04001         MesPrint("@Improper filename");
04002         return(-1);
04003     }
04004     s++;
04005     *to = 0;
04006     return(CloseChannel((char *)name));
04007 }
04008
04009 /*
04010     #] DoPreClose :
04011     #[ DoPreWrite :
04012
04013     Syntax:
04014     #write [<filename>] "formatstring" [,objects]
04015     The format string can contain the following special objects/codes
04016     \n  newline
04017     \t  tab
04018     \!  if last entry in string: no linefeed at end
04019     \b  put \ in output
04020     %$  $-variable (to be found among the objects)
04021     %e  expression (name to be found among the objects)
04022     %E  expression without ; (name to be found among the objects)
04023     %s  string (to be found among the objects) (with or without "")
04024     %S  subterms (see PrintSubtermList)
04025 */
04026
04027 int DoPreWrite(UBYTE *s)
04028 {
04029     HANDLERS h;
04030
04031     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
04032     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04033     if ( AP.preError ) return(0);
04034
04035     #ifdef WITHMPI
04036     if ( PF.me != MASTER ) return 0;
04037 #endif

```



```

04038
04039     h.oldsilent      = AM.silent;
04040     h.newlogonly     = h.oldlogonly = AM.FileOnlyFlag;
04041     h.newhandle      = h.oldhandle  = AC.LogHandle;
04042     h.oldprinttype   = AO.PrintType;
04043
04044     while ( *s == ' ' || *s == '\t' ) s++;
04045 /*
04046     Determine where to write
04047 */
04048     if( (s=defineChannel(s,&h))==0 ) return(-1);
04049
04050     return(writeToChannel(WRITEOUT,s,&h));
04051 }
04052
04053 /*
04054     #] DoPreWrite :
04055     #[ DoProcedure :
04056
04057     We have to read this procedure into a buffer.
04058     The only complications are:
04059     1: we have to seek through the file to do this efficiently
04060         the file operations under VMS cannot do this properly
04061         (unless we use the proper ANSI structs?)
04062         This is the reason why we read whole input files under VMS.
04063     2: what to do when the same name is used twice.
04064     Note that we have to do the reading without substitution of
04065     preprocessor variables.
04066 */
04067
04068 int DoProcedure(UBYTE *s)
04069 {
04070     UBYTE c;
04071     PROCEDURE *p;
04072     LONG i;
04073     if ( ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH )
04074     || ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) ) {
04075         if ( PreSkip((UBYTE *) "procedure", (UBYTE *) "endprocedure",1) ) return(-1);
04076         return(0);
04077     }
04078     // AP.ProcList.num = NumProcedures is incremented inside FromList
04079     p = (PROCEDURE *)FromList(&AP.ProcList);
04080     if ( PreLoad(&(p->p), (UBYTE *) "procedure", (UBYTE *) "endprocedure"
04081     ,1,(char *) "procedure") ) return(-1);
04082
04083     // If the procedure below is not local (loadmode 0) or has been called (loadmode 1), this is a
04084     // nested procedure definition. We must free its allocations when we hit its DoEndprocedure.
04085     // If it seems local (loadmode 2) but is tagged as "mustfree", it is multiply nested and we
04086     // similarly must free its allocations.
04087     if ( NumProcedures >= 2 &&
04088         ( Procedures[NumProcedures-2].loadmode != 2 || Procedures[NumProcedures-2].mustfree ) ) {
04089         p->mustfree = 1;
04090     }
04091     // Otherwise, we are defining a local procedure at "ground level", and we keep the definition
04092     // on the procedure stack until FORM terminates.
04093     else {
04094         p->mustfree = 0;
04095     }
04096
04097     p->loadmode = 2;
04098     s = p->p.buffer + 10;
04099     while ( *s == ' ' || *s == LINEFEED ) s++;
04100     if ( chartype[*s] ) {
04101         MesPrint("@Illegal name for procedure");
04102         return(-1);
04103     }
04104     p->name = s++;
04105     while ( chartype[*s] == 0 || chartype[*s] == 1 ) s++;
04106     c = *s; *s = 0;
04107     p->name = strDup1(p->name,"procedure");
04108     *s = c;
04109 /*
04110     Check for double names
04111 */
04112     for ( i = NumProcedures-2; i >= 0; i-- ) {
04113         if ( StrCmp(Procedures[i].name,p->name) == 0 ) {
04114             Error1("Multiple occurrence of procedure name ",p->name);
04115         }
04116     }
04117     return(0);
04118 }
04119
04120 /*
04121     #] DoProcedure :
04122     #[ DoPreBreak :
04123 */
04124

```

```

04125 int DoPreBreak(UBYTE *s)
04126 {
04127     DUMMYUSE(s);
04128     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04129     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPESWITCH ) {
04130         if ( AP.PreSwitchLevel <= 0 )
04131             MesPrint("@Break without corresponding Switch");
04132         else MessPreNesting(7);
04133         return(-1);
04134     }
04135     if ( AP.PreSwitchLevel <= 0 ) {
04136         MesPrint("@Break without corresponding Switch");
04137         return(-1);
04138     }
04139     if ( AP.PreSwitchModes[AP.PreSwitchLevel] == EXECUTINGPRESWITCH )
04140         AP.PreSwitchModes[AP.PreSwitchLevel] = SEARCHINGPREENDSWITCH;
04141     return(0);
04142 }
04143
04144 /*
04145     #] DoPreBreak :
04146     #[ DoPreCase :
04147 */
04148
04149 int DoPreCase(UBYTE *s)
04150 {
04151     UBYTE *t;
04152     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04153     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPESWITCH ) {
04154         if ( AP.PreSwitchLevel <= 0 )
04155             MesPrint("@Case without corresponding Switch");
04156         else MessPreNesting(8);
04157         return(-1);
04158     }
04159     if ( AP.PreSwitchLevel <= 0 ) {
04160         MesPrint("@Case without corresponding Switch");
04161         return(-1);
04162     }
04163     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != SEARCHINGPRECASE ) return(0);
04164
04165     SKIPBLANKS(s)
04166     t = s;
04167     while ( *s ) { if ( *s == '\\\\' ) s++; s++; }
04168     while ( s > t && ( s[-1] == ' ' || s[-1] == '\\t' ) && s[-2] != '\\\\' ) {
04169         if ( s[-2] == '\\\\' ) s--;
04170         s--;
04171     }
04172     if ( *t == '"' && s > t+1 && s[-1] == '"' && s[-2] != '\\\\' ) {
04173         t++; s--; *s = 0;
04174     }
04175     else *s = 0;
04176     s = AP.PreSwitchStrings[AP.PreSwitchLevel];
04177     while ( *t == *s && *t ) { s++; t++; }
04178     if ( *t || *s ) return(0); /* case did not match */
04179     AP.PreSwitchModes[AP.PreSwitchLevel] = EXECUTINGPRESWITCH;
04180     return(0);
04181 }
04182
04183 /*
04184     #] DoPreCase :
04185     #[ DoPreDefault :
04186 */
04187
04188 int DoPreDefault(UBYTE *s)
04189 {
04190     DUMMYUSE(s);
04191     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04192     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPESWITCH ) {
04193         if ( AP.PreSwitchLevel <= 0 )
04194             MesPrint("@Default without corresponding Switch");
04195         else MessPreNesting(9);
04196         return(-1);
04197     }
04198     if ( AP.PreSwitchLevel <= 0 ) {
04199         MesPrint("@Default without corresponding Switch");
04200         return(-1);
04201     }
04202     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != SEARCHINGPRECASE ) return(0);
04203     AP.PreSwitchModes[AP.PreSwitchLevel] = EXECUTINGPRESWITCH;
04204     return(0);
04205 }
04206
04207 /*
04208     #] DoPreDefault :
04209     #[ DoPreEndSwitch :
04210 */
04211

```

```

04212 int DoPreEndSwitch(UBYTE *s)
04213 {
04214     DUMMYUSE(s);
04215     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04216     if ( AP.PreTypes[AP.NumPreTypes] != PRETYPESWITCH ) {
04217         if ( AP.PreSwitchLevel <= 0 )
04218             MesPrint("@EndSwitch without corresponding Switch");
04219         else MessPreNesting(10);
04220         return(-1);
04221     }
04222     AP.NumPreTypes--;
04223     if ( AP.PreSwitchLevel <= 0 ) {
04224         MesPrint("@EndSwitch without corresponding Switch");
04225         return(-1);
04226     }
04227     M_free(AP.PreSwitchStrings[AP.PreSwitchLevel--], "pre switch string");
04228     return(0);
04229 }
04230
04231 /*
04232     #] DoPreEndSwitch :
04233     #[ DoPreSwitch :
04234
04235     There should be a string after this.
04236     We have to store it somewhere.
04237 */
04238
04239 int DoPreSwitch(UBYTE *s)
04240 {
04241     UBYTE *t, *switchstring, **newstrings;
04242     int newnum, i, *newmodes;
04243     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04244     SKIPBLANKS(s)
04245     t = s;
04246     while ( *s ) { if ( *s == '\\\\' ) s++; s++; }
04247     while ( s > t && ( s[-1] == ' ' || s[-1] == '\\t' ) && s[-2] != '\\\\' ) {
04248         if ( s[-2] == '\\\\' ) s--;
04249         s--;
04250     }
04251     if ( *t == '"' && s > t+1 && s[-1] == '"' && s[-2] != '\\\\' ) {
04252         t++; s--; *s = 0;
04253     }
04254     else *s = 0;
04255     switchstring = (UBYTE *)Malloc1((s-t)+1, "case string");
04256     s = switchstring;
04257     while ( *t ) {
04258         if ( *t == '\\\\' ) t++;
04259         *s++ = *t++;
04260     }
04261     *s = 0;
04262     if ( AP.PreSwitchLevel >= AP.NumPreSwitchStrings ) {
04263         newnum = 2*AP.NumPreSwitchStrings;
04264         newstrings = (UBYTE **)Malloc1(sizeof(UBYTE *)*(newnum+1), "case strings");
04265         newmodes = (int *)Malloc1(sizeof(int)*(newnum+1), "case strings");
04266         for ( i = 0; i < AP.NumPreSwitchStrings; i++ )
04267             newstrings[i] = AP.PreSwitchStrings[i];
04268         M_free(AP.PreSwitchStrings, "AP.PreSwitchStrings");
04269         for ( i = 0; i <= AP.NumPreSwitchStrings; i++ )
04270             newmodes[i] = AP.PreSwitchModes[i];
04271         M_free(AP.PreSwitchModes, "AP.PreSwitchModes");
04272         AP.PreSwitchStrings = newstrings;
04273         AP.PreSwitchModes = newmodes;
04274         AP.NumPreSwitchStrings = newnum;
04275     }
04276     AP.PreSwitchStrings[++AP.PreSwitchLevel] = switchstring;
04277     if ( ( AP.PreSwitchLevel > 1 )
04278         && ( AP.PreSwitchModes[AP.PreSwitchLevel-1] != EXECUTINGPRESWITCH ) )
04279         AP.PreSwitchModes[AP.PreSwitchLevel] = SEARCHINGPREENDSWITCH;
04280     else
04281         AP.PreSwitchModes[AP.PreSwitchLevel] = SEARCHINGPRECASE;
04282     AddToPreTypes(PRETYPESWITCH);
04283     return(0);
04284 }
04285
04286 /*
04287     #] DoPreSwitch :
04288     #[ DoPreShow :
04289
04290     Print the contents of the preprocessor variables
04291 */
04292
04293 int DoPreShow(UBYTE *s)
04294 {
04295     int i;
04296     UBYTE *name, c;
04297     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
04298     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);

```

```

04299     while ( *s == ' ' || *s == '\\t' ) s++;
04300     if ( *s == 0 ) {
04301         MesPrint("%#The preprocessor variables:");
04302         for ( i = 0; i < NumPre; i++ ) {
04303             MesPrint("%d: %s = \"%s\"",i,PreVar[i].name,PreVar[i].value);
04304         }
04305     }
04306     else {
04307         while ( *s ) {
04308             name = s; while ( *s && *s != ' ' && *s != '\\t' && *s != ',' ) s++;
04309             c = *s; *s = 0;
04310             for ( i = 0; i < NumPre; i++ ) {
04311                 if ( StrCmp(PreVar[i].name,name) == 0 )
04312                     MesPrint("%d: %s = \"%s\"",i,PreVar[i].name,PreVar[i].value);
04313             }
04314             *s = c;
04315             while ( *s == ' ' || *s == '\\t' ) s++;
04316         }
04317     }
04318     return(0);
04319 }
04320
04321 /*
04322     #] DoPreShow :
04323     #[ DoSystem :
04324 */
04325
04326 /*
04327  * A macro for translating the contents of `x' into a string after expanding.
04328 */
04329 #define STRINGIFY(x)  STRINGIFY__(x)
04330 #define STRINGIFY__(x) #x
04331
04332 int DoSystem(UBYTE *s)
04333 {
04334     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
04335     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
04336     if ( AP.preError ) return(0);
04337     #ifndef WITHSYSTEM
04338     FLUSHCONSOLE;
04339     while ( *s == ' ' || *s == '\\t' ) s++;
04340     if ( *s == '-' && s[1] == 'e' ) {
04341         LONG err;
04342         UBYTE str[24];
04343         s += 2;
04344         if ( *s != ' ' ) {
04345             MesPrint("@Syntax error in #system command.");
04346             return(-1);
04347         }
04348         while ( *s == ' ' || *s == '\\t' ) s++;
04349         err = system((char *)s);
04350         NumToStr(str,err);
04351         PutPreVar((UBYTE *)"SYSTEMERROR_",str,0,1);
04352     }
04353     else if ( system((char *)s) ) {
04354         MesPrint("@System call returned with error condition");
04355         Terminate(-1);
04356     }
04357     return(0);
04358     #else
04359     Error0("External programs not implemented on this computer/system");
04360     return(-1);
04361     #endif
04362 }
04363
04364 /*
04365     #] DoSystem :
04366     #[ PreLoad :
04367
04368     Loads a loop or procedure into a special buffer.
04369     Note: The current instruction is already in the preStart buffer
04370 */
04371
04372 int PreLoad(PRELOAD *p, UBYTE *start, UBYTE *stop, int mode, char *message)
04373 {
04374     UBYTE *s, *t, *top, *newbuffer, c;
04375     LONG i, ppsize, linenum = AC.CurrentStream->linenum;
04376     int size1, size2, level, com=0, last=1, strng = 0;
04377     p->size = AP.pSize;
04378     p->buffer = (UBYTE *)Malloc1(p->size+1,message);
04379     top = p->buffer + p->size - 2;
04380     t = p->buffer; *t++ = '#';
04381     s = start; size1 = size2 = 0;
04382     while ( *s ) { s++; size1++; }
04383     s = stop; while ( *s ) { s++; size2++; }
04384     s = AP.preStart; while ( *s ) *t++ = *s++; *t++ = LINEFEED;
04385     level = 1;

```

```

04386     i = 100;
04387     for (;;) {
04388         c = GetInput();
04389         if ( c == EOFINPUT ) {
04390             MesPrint("@Missing %#s, Should match line %1",stop,linenum);
04391             return(-1);
04392         }
04393         if ( c == AP.ComChar && last == 1 ) com = 1;
04394         if ( c == LINEFEED ) { last = 1; com = 0; }
04395         else last = 0;
04396
04397         if ( ( c == '"' ) && ( com == 0 ) ) { strng ^= 1; }
04398
04399         if ( ( c == '#' ) && ( com == 0 ) ) i = 0;
04400         else i++;
04401
04402         if ( t >= top ) {
04403             ppsize = t - p->buffer;
04404             p->size *= 2;
04405             newbuffer = (UBYTE *)Malloc1(p->size,message);
04406             t = newbuffer; s = p->buffer;
04407             while ( --ppsize >= 0 ) *t++ = *s++;
04408             M_free(p->buffer,"loading do loop");
04409             p->buffer = newbuffer;
04410             top = p->buffer + p->size - 2;
04411         }
04412         *t++ = c;
04413         if ( strng == 0 ) {
04414             if ( ( i == size2 ) && ( com == 0 ) ) {
04415                 *t = 0;
04416                 if ( StrICmp(t-size2,(UBYTE *) (stop)) == 0 ) {
04417                     while ( ( c = GetInput() ) != LINEFEED && c != EOFINPUT ) {}
04418                     level--;
04419                     if ( level <= 0 ) break;
04420                     if ( c == EOFINPUT ) Error1("Missing #",stop);
04421                     *t++ = LINEFEED; *t = 0; last = 1;
04422                 }
04423             }
04424             if ( ( i == size1 ) && mode && ( com == 0 ) ) {
04425                 *t = 0;
04426                 if ( StrICmp(t-size1,(UBYTE *) (start)) == 0 ) {
04427                     /*
04428                         while ( ( c = GetInput() ) != LINEFEED && c != EOFINPUT ) {}
04429                         if ( c == EOFINPUT ) Error1("Missing #",stop);
04430                     */
04431                     level++;
04432                 }
04433             }
04434             if ( i == 1 && t[-2] == LINEFEED ) {
04435                 if ( c == '-' ) AC.NoShowInput = 1;
04436                 else if ( c == '+' ) AC.NoShowInput = 0;
04437             }
04438         }
04439     }
04440     *t++ = LINEFEED;
04441     *t = 0;
04442     return(0);
04443 }
04444
04445 /*
04446     #] PreLoad :
04447     #[ PreSkip :
04448
04449     Skips a loop or procedure.
04450     Note: The current instruction is already in the preStart buffer
04451 */
04452
04453 #define SKIPBUFSIZE 20
04454
04455 int PreSkip(UBYTE *start, UBYTE *stop, int mode)
04456 {
04457     UBYTE *s, *t, buffer[SKIPBUFSIZE+2], c;
04458     LONG i, linenum = AC.CurrentStream->linenum;
04459     int size1, size2, level, com=0, last=1;
04460
04461     t = buffer; *t++ = '#';
04462     s = start; size1 = size2 = 0;
04463     while ( *s ) { s++; size1++; }
04464     s = stop; while ( *s ) { s++; size2++; }
04465     level = 1;
04466     i = 0;
04467     for (;;) {
04468         c = GetInput();
04469         if ( c == EOFINPUT ) {
04470             MesPrint("@Missing %#s, Should match line %1",stop,linenum);
04471             return(-1);
04472         }

```

```

04473         if ( c == AP.ComChar && last == 1 ) com = 1;
04474         if ( c == LINEFEED ) { last = 1; com = 0; i = 0; t = buffer; }
04475         else last = 0;
04476         if ( ( c == '#' ) && ( com == 0 ) ) { i = 0; t = buffer; }
04477         else i++;
04478
04479         if ( i < SKIPBUFSIZE ) *t++ = c;
04480         if ( ( i == size2 ) && ( com == 0 ) ) {
04481             *t = 0;
04482             if ( StrICmp(t-size2, (UBYTE *) (stop)) == 0 ) {
04483                 while ( ( c = GetInput() ) != LINEFEED && c != ENDOFINPUT ) {}
04484                 level--;
04485                 if ( level <= 0 ) {
04486                     pushbackchar = LINEFEED;
04487                     break;
04488                 }
04489                 if ( c == ENDOFINPUT ) Error1("Missing #", stop);
04490                 i = 0; t = buffer;
04491             }
04492         }
04493         if ( ( i == size1 ) && mode && ( com == 0 ) ) {
04494             *t = 0;
04495             if ( StrICmp(t-size1, (UBYTE *) (start)) == 0 ) {
04496                 while ( ( c = GetInput() ) != LINEFEED && c != ENDOFINPUT ) {}
04497                 level++;
04498                 i = 0; t = buffer;
04499             }
04500         }
04501     }
04502     return(0);
04503 }
04504
04505 /*
04506     #] PreSkip :
04507     #[ StartPrepro :
04508 */
04509
04510 void StartPrepro(void)
04511 {
04512     int **ppp;
04513     AP.MaxPreIfLevel = 2;
04514     ppp = &AP.PreIfStack;
04515     if ( DoubleList((void ***) ppp, &AP.MaxPreIfLevel, sizeof(int),
04516         "PreIfLevels") ) Terminate(-1);
04517     AP.PreIfLevel = 0; AP.PreIfStack[0] = EXECUTINGIF;
04518
04519     AP.NumPreSwitchStrings = 10;
04520     AP.PreSwitchStrings = (UBYTE **) Malloc1(sizeof(UBYTE *) *
04521         (AP.NumPreSwitchStrings+1), "case strings");
04522     AP.PreSwitchModes = (int *) Malloc1(sizeof(int) *
04523         (AP.NumPreSwitchStrings+1), "case strings");
04524     AP.PreSwitchModes[0] = EXECUTINGPRESWITCH;
04525     AP.PreSwitchLevel = 0;
04526 }
04527
04528 /*
04529     #] StartPrepro :
04530     #[ EvalPreIf :
04531
04532     Evaluates the condition in an if instruction.
04533     The return value is EXECUTINGIF if the condition is true.
04534     If it is false the returnvalue is LOOKINGFORELSE.
04535     An error gives a return value of -1
04536 */
04537
04538 int EvalPreIf(UBYTE *s)
04539 {
04540     UBYTE *t, *u;
04541     int val;
04542     t = s;
04543     while ( *t ) t++;
04544     *t++ = ')';
04545     *t = 0;
04546     if ( ( u = PreIfEval(s, &val) ) == 0 ) return(-1);
04547     if ( u < t ) {
04548         MesPrint("@Unmatched parentheses in condition");
04549         return(-1);
04550     }
04551     if ( val ) return(EXECUTINGIF);
04552     else return(LOOKINGFORELSE);
04553 }
04554
04555 /*
04556     #] EvalPreIf :
04557     #[ PreIfEval :
04558
04559     Used for recursions in the evaluation of a preprocessor if-condition.

```

```

04560         It determines whether the contents of () is true or false
04561         (or in error).
04562         The return value is the address of the first character after the
04563         closing parenthesis or null if there is an error.
04564         In value we find true(1) or false(0)
04565         We enter after the opening parenthesis.
04566         There are levels:
04567             0: orlevel:  a || b
04568             1: andlevel: a && b
04569             2: eqlevel:  a == b or a != b or a = b
04570             3: cmplevel: a > b or a >= b or a < b or a <= b or a >~ b etc
04571 */
04572
04573 UBYTE *PreIfEval(UBYTE *s, int *value)
04574 {
04575     int orlevel = 0, andlevel = 0, eqlevel = 0, cmplevel = 0;
04576     int type, val;
04577     LONG val2;
04578     int orte, orval, cmptype, cmpval, eqtype, eqval, andtype, andval;
04579     UBYTE *t, *eqt, *cmpt, c;
04580     int eqop, cmpop;
04581     orte = orval = cmptype = cmpval = eqtype = eqval = andtype = andval = 0;
04582     eqop = cmpop = 0;
04583     eqt = cmpt = 0;
04584     *value = 0;
04585     while ( *s != ')' ) {
04586         while ( *s == ' ' || *s == '\t' || *s == '\n' || *s == '\r' ) s++;
04587         t = s;
04588         s = pParseObject(s, &type, &val2);
04589         if ( s == 0 ) return(0);
04590         val = val2;
04591         c = *s;
04592         *s++ = 0;      /* in case the object is a string without " */
04593         while ( c == ' ' || c == '\t' || c == '\n' || c == '\r' ) {
04594             c = *s; *s++ = 0;
04595         }
04596         if ( *t == '"' ) t++;
04597         switch(c) {
04598             case '|':
04599                 if ( *s != '|' ) goto illoper;
04600                 s++;
04601                 /* fall through */
04602             case ')':
04603                 if ( cmplevel ) {
04604                     if ( type == 0 || cmptype == 0 ) goto illobject;
04605                     val = PreCmp(type, val, t, cmptype, cmpval, cmpt, cmpop);
04606                     type = 0;
04607                     cmplevel = 0;
04608                 }
04609                 if ( eqlevel ) {
04610                     val = PreEq(type, val, t, eqtype, eqval, eqt, eqop);
04611                     type = 0;
04612                     eqlevel = 0;
04613                 }
04614                 if ( andlevel ) {
04615                     if ( andtype != 0 || type != 0 ) goto illobject;
04616                     val &= andval;
04617                     andlevel = 0;
04618                 }
04619                 if ( orlevel ) {
04620                     if ( orte != 0 || type != 0 ) goto illobject;
04621                     val |= orval;
04622                 }
04623                 if ( c == ')' ) {
04624                     *value = val;
04625                     return(s);
04626                 }
04627                 orlevel = 1;
04628                 orval = val;
04629                 orte = type;
04630                 break;
04631             case '&':
04632                 if ( *s != '&' ) goto illoper;
04633                 s++;
04634                 if ( cmplevel ) {
04635                     if ( type == 0 || cmptype == 0 ) goto illobject;
04636                     val = PreCmp(type, val, t, cmptype, cmpval, cmpt, cmpop);
04637                     type = 0;
04638                     cmplevel = 0;
04639                 }
04640                 if ( eqlevel ) {
04641                     val = PreEq(type, val, t, eqtype, eqval, eqt, eqop);
04642                     type = 0;
04643                     eqlevel = 0;
04644                 }
04645                 if ( andlevel ) {
04646                     if ( andtype != 0 || type != 0 ) goto illobject;

```

```

04647         val &= andval;
04648     }
04649     andlevel = 1;
04650     andval = val;
04651     andtype = type;
04652     break;
04653 case '!':
04654 case '=':
04655     if ( eqlevel ) goto illorder;
04656     if ( cmplevel ) {
04657         if ( type == 0 || cmptype == 0 ) goto illobject;
04658         val = PreCmp(type,val,t,cmptype,cmpval,cmpt,cmpop);
04659         type = 0;
04660         cmplevel = 0;
04661     }
04662     if ( c == '!' && *s != '=' ) goto illoper;
04663     if ( *s == '=' ) s++;
04664     if ( c == '!' ) eqop = 1;
04665     else eqop = 0;
04666     eqlevel = 1; eqt = t; eqval = val; eqtype = type;
04667     break;
04668 case '>':
04669 case '<':
04670     if ( cmplevel ) goto illorder;
04671     if ( c == '<' ) cmpop = -1;
04672     else cmpop = 1;
04673     cmplevel = 1; cmpt = t; cmpval = val; cmptype = type;
04674     if ( *s == '=' ) {
04675         s++;
04676         if ( *s == '~' ) { s++; cmpop *= 4; }
04677         else cmpop *= 2;
04678     }
04679     else if ( *s == '~' ) { s++; cmpop *= 3; }
04680     break;
04681 default:
04682     goto illoper;
04683 }
04684 }
04685 return(s);
04686 illorder:
04687     MesPrint("@illegal order of operators");
04688     return(0);
04689 illobject:
04690     MesPrint("@illegal object for this operator");
04691     return(0);
04692 illoper:
04693     MesPrint("@illegal operator");
04694     return(0);
04695 }
04696
04697 /*
04698     #] PreIfEval :
04699     #[ PreCmp :
04700 */
04701
04702 int PreCmp(int type, int val, UBYTE *t, int type2, int val2, UBYTE *t2, int cmpop)
04703 {
04704     if ( type == 2 || type2 == 2 || cmpop < -2 || cmpop > 2 ) {
04705         if ( cmpop < 0 && cmpop > -3 ) cmpop -= 2;
04706         if ( cmpop > 0 && cmpop < 3 ) cmpop += 2;
04707         if ( cmpop == 3 ) val = StrCmp(t2,t) > 0;
04708         else if ( cmpop == 4 ) val = StrCmp(t2,t) >= 0;
04709         else if ( cmpop == -3 ) val = StrCmp(t2,t) < 0;
04710         else if ( cmpop == -4 ) val = StrCmp(t2,t) <= 0;
04711     }
04712     else {
04713         if ( cmpop == 1 ) val = ( val2 > val );
04714         else if ( cmpop == 2 ) val = ( val2 >= val );
04715         else if ( cmpop == -1 ) val = ( val2 < val );
04716         else if ( cmpop == -2 ) val = ( val2 <= val );
04717     }
04718     return(val);
04719 }
04720
04721 /*
04722     #] PreCmp :
04723     #[ PreEq :
04724 */
04725
04726 int PreEq(int type, int val, UBYTE *t, int type2, int val2, UBYTE *t2, int eqop)
04727 {
04728     UBYTE str[20];
04729     if ( type == 2 || type2 == 2 ) {
04730         if ( type != 2 ) { NumToStr(str,val); t = str; }
04731         if ( type2 != 2 ) { NumToStr(str,val2); t2 = str; }
04732         if ( eqop == 1 ) val = StrCmp(t,t2) != 0;
04733         else val = StrCmp(t,t2) == 0;

```



```

04734     }
04735     else {
04736         if ( eqop ) val = val != val2;
04737         else      val = val == val2;
04738     }
04739     return(val);
04740 }
04741
04742 /*
04743     #] PreEq :
04744     #[ pParseObject :
04745
04746     Parses a preprocessor object. We can have:
04747     1: a number (type = 1)
04748     2: a string (type = 2)
04749     3: an expression between parentheses (type = 0)
04750     4: a special function (type = 3)
04751     If the object is not a number, an expression or a special operator
04752     we try to interpret it as a string.
04753 */
04754
04755 UBYTE *pParseObject(UBYTE *s, int *type, LONG *val2)
04756 {
04757     UBYTE *t, c;
04758     int sign, val = 0;
04759     LONG x;
04760     while ( *s == ' ' || *s == '\t' ) s++;
04761     if ( *s == '(' ) {
04762         s++;
04763         while ( *s == ' ' || *s == '\t' || *s == '\n' || *s == '\r' ) s++;
04764         s = PreIfEval(s,&val);
04765         *type = 0;
04766         *val2 = val;
04767         return(s);
04768     }
04769     else if ( *s == '$' && s[1] == '(' ) {
04770         s += 2;
04771         while ( *s == ' ' || *s == '\t' || *s == '\n' || *s == '\r' ) s++;
04772         s = PreIfDollarEval(s,&val);
04773         *type = 0; *val2 = val;
04774         return(s);
04775     }
04776     if ( *s == 0 ) {
04777 illend:
04778         MesPrint("@illegal end of condition");
04779         return(0);
04780     }
04781     if ( *s == '"' ) {
04782         s++;
04783         while ( *s && *s != '"' ) {
04784             if ( *s == '\\' ) s++;
04785             s++;
04786         }
04787         if ( *s == 0 ) goto illend;
04788         else *s = 0;
04789         *type = 2;
04790         s++;
04791
04792         while ( *s == ' ' || *s == '\t' || *s == '\n' || *s == '\r' ) s++;
04793
04794         return(s);
04795     }
04796     t = s; sign = 1; x = 0;
04797     if ( chartype[*t] == 0 ) { /* Special operators and strings without "" */
04798         do { t++; } while ( chartype[*t] <= 1 );
04799         if ( *t == '(' ) {
04800             WORD ttype;
04801             c = *t; *t = 0;
04802             if ( StrICmp(s, (UBYTE *) "termsin") == 0 ) {
04803                 UBYTE *tt;
04804                 WORD numdol, numexp;
04805                 ttype = 0;
04806 together:
04807                 *t++ = c;
04808                 while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
04809                 if ( *t == '$' ) {
04810                     t++; tt = t; while ( chartype[*tt] <= 1 ) tt++;
04811                     c = *tt; *tt = 0;
04812                     if ( ( numdol = GetDollar(t) ) > 0 ) {
04813                         *tt = c;
04814                         if ( ttype == 1 ) {
04815                             x = SizeOfDollar(numdol);
04816                         }
04817                         else {
04818                             x = TermsInDollar(numdol);
04819                         }
04820                     }

```

```

04821         else {
04822             MesPrint("@%s has not (yet) been defined",t);
04823             *tt = c;
04824             Terminate(-1);
04825         }
04826     }
04827     else {
04828         tt = SkipAName(t);
04829         c = *tt; *tt = 0;
04830         if ( GetName(AC.exprnames,t,&numexp,NOAUTO) == NAMENOTFOUND ) {
04831             MesPrint("@%s has not (yet) been defined",t);
04832             *tt = c;
04833             Terminate(-1);
04834         }
04835         else {
04836             *tt = c;
04837             if ( ttype == 1 ) {
04838                 x = SizeOfExpression(numexp);
04839             }
04840             else {
04841                 x = TermsInExpression(numexp);
04842             }
04843         }
04844     }
04845     while ( *tt == ' ' || *tt == '\t'
04846            || *tt == '\n' || *tt == '\r' ) tt++;
04847     if ( *tt != ')' ) {
04848         MesPrint("@Improper use of terms($var) or terms(expr)");
04849         Terminate(-1);
04850     }
04851     *type = 3;
04852     s = tt+1;
04853     *val2 = x;
04854     return(s);
04855 }
04856 else if ( StrICmp(s,(UBYTE *)"sizeof") == 0 ) {
04857     ttype = 1;
04858     goto together;
04859 }
04860 else if ( StrICmp(s,(UBYTE *)"exists") == 0 ) {
04861     UBYTE *tt;
04862     WORD numdol, numexp;
04863     *tt++ = c;
04864     while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
04865     if ( *t == '$' ) {
04866         t++; tt = t; while ( chartype[*tt] <= 1 ) tt++;
04867         c = *tt; *tt = 0;
04868         if ( ( numdol = GetDollar(t) ) >= 0 ) { x = 1; }
04869         else { x = 0; }
04870         *tt = c;
04871     }
04872     else if ( *t == '"' ) { /* see whether a file exists */
04873         /* UBYTE *name, *oldname; */
04874         t++; tt = t;
04875         for (;;) {
04876             if ( *tt == '\\\ ' ) tt++;
04877             else if ( *tt == '"' ) break;
04878             tt++;
04879         }
04880         c = *tt; *tt = 0;
04881         /*
04882         Try to open the file. If possible, return 1.
04883         Afterwards close it.
04884         We do have to run through the FORMPATH. Hence we use LocateFile.
04885         This routine may change the name to the full name.
04886
04887         oldname = name = strDup1(t,"name in exists");
04888         x = LocateFile(&name,-1);
04889         */
04890         x = OpenFile((char *)t);
04891         if ( x >= 0 ) {
04892             CloseFile(x);
04893             x = 1;
04894             /*
04895             if ( name != oldname ) M_free(name,"name from LocateFile");
04896             */
04897         }
04898         else x = 0;
04899         /*
04900         M_free(oldname,"name in exists");
04901         */
04902         *tt++ = c;
04903     }
04904     else {
04905         tt = SkipAName(t);
04906         c = *tt; *tt = 0;
04907         if ( GetName(AC.exprnames,t,&numexp,NOAUTO) == NAMENOTFOUND ) { x = 0; }

```

```

04908         else { x = 1; }
04909         *tt = c;
04910     }
04911     while ( *tt == ' ' || *tt == '\t'
04912             || *tt == '\n' || *tt == '\r' ) tt++;
04913     if ( *tt != ')' ) {
04914         MesPrint("@Improper use of exists($var) or exists(expr)");
04915         Terminate(-1);
04916     }
04917     *type = 3;
04918     s = tt+1;
04919     *val2 = x;
04920     return(s);
04921 }
04922 else if ( StrICmp(s, (UBYTE *) "isnumerical") == 0 ) {
04923     GETIDENTITY
04924     UBYTE *tt;
04925     WORD numdol, numexp;
04926     *tt++ = c;
04927     while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
04928     if ( *t == '$' ) {
04929         tt = t; while ( chartype[*tt] <= 1 ) tt++;
04930         c = *tt; *tt = 0;
04931         if ( ( numdol = GetDollar(t) ) < 0 ) {
04932             MesPrint("@$ variable in isnumerical(%s) does not exist",t);
04933             Terminate(-1);
04934         }
04935         x = DolToLong(BHEAD numdol);
04936         if ( AN.ErrorInDollar ) {
04937             DOLLARS d = Dollars + numdol;
04938             x = 0;
04939             if ( d->type == DOLNUMBER || d->type == DOLTERMS ) {
04940                 if ( d->where[0] == 0 ) x = 1;
04941                 else if ( d->where[d->where[0]] == 0 ) {
04942                     if ( ABS(d->where[d->where[0]-1]) == d->where[0]-1 )
04943                         x = 1;
04944                 }
04945             }
04946         }
04947         else x = 1;
04948         *tt = c;
04949     }
04950     else {
04951         tt = SkipAName(t);
04952         c = *tt; *tt = 0;
04953         if ( GetName(AC.exprnames,t,&numexp,NOAUTO) == NAMENOTFOUND ) {
04954             MesPrint("@expression in isnumerical(%s) does not exist",t);
04955             Terminate(-1);
04956         }
04957         x = TermsInExpression(numexp);
04958         if ( x != 1 ) x = 0;
04959         else {
04960             WORD *term = AT.WorkPointer;
04961             if ( GetFirstTerm(term,numexp,1) < 0 ) {
04962                 MesPrint("@error reading expression in isnumerical(%s)",t);
04963                 Terminate(-1);
04964             }
04965             if ( *term == ABS(term[*term-1])+1 ) x = 1;
04966             else x = 0;
04967         }
04968         *tt = c;
04969     }
04970     while ( *tt == ' ' || *tt == '\t'
04971             || *tt == '\n' || *tt == '\r' ) tt++;
04972     if ( *tt != ')' ) {
04973         MesPrint("@Improper use of isnumerical($var) or numerical(expr)");
04974         Terminate(-1);
04975     }
04976     *type = 3;
04977     s = tt+1;
04978     *val2 = x;
04979     return(s);
04980 }
04981 else if ( StrICmp(s, (UBYTE *) ("maxpowerof")) == 0 ) {
04982     UBYTE *tt;
04983     WORD numsym;
04984     int stype;
04985     *tt++ = c;
04986     while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
04987     tt = SkipAName(t);
04988     c = *tt; *tt = 0;
04989     if ( ( stype = GetName(AC.varnames,t,&numsym,NOAUTO) ) == NAMENOTFOUND ) {
04990         MesPrint("@%s has not (yet) been defined",t);
04991         *tt = c;
04992         Terminate(-1);
04993     }
04994     else if ( stype != CSYMBOL ) {

```

```

04995         MesPrint("@%s should be a symbol",t);
04996         *tt = c;
04997         Terminate(-1);
04998     }
04999     else {
05000         *tt = c;
05001         x = symbols[numsym].maxpower;
05002     }
05003     while ( *tt == ' ' || *tt == '\t'
05004             || *tt == '\n' || *tt == '\r' ) tt++;
05005     if ( *tt != ')' ) {
05006         MesPrint("@Improper use of maxpowerof(symbol)");
05007         Terminate(-1);
05008     }
05009     *type = 3;
05010     s = tt+1;
05011     *val2 = x;
05012     return(s);
05013 }
05014 else if ( StrICmp(s,(UBYTE *)("minpowerof")) == 0 ) {
05015     UBYTE *tt;
05016     WORD numsym;
05017     int stype;
05018     *tt++ = c;
05019     while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
05020     tt = SkipAName(t);
05021     c = *tt; *tt = 0;
05022     if ( ( stype = GetName(AC.varnames,t,&numsym,NOAUTO) ) == NAMENOTFOUND ) {
05023         MesPrint("@%s has not (yet) been defined",t);
05024         *tt = c;
05025         Terminate(-1);
05026     }
05027     else if ( stype != CSYMBOL ) {
05028         MesPrint("@%s should be a symbol",t);
05029         *tt = c;
05030         Terminate(-1);
05031     }
05032     else {
05033         *tt = c;
05034         x = symbols[numsym].minpower;
05035     }
05036     while ( *tt == ' ' || *tt == '\t'
05037             || *tt == '\n' || *tt == '\r' ) tt++;
05038     if ( *tt != ')' ) {
05039         MesPrint("@Improper use of minpowerof(symbol)");
05040         Terminate(-1);
05041     }
05042     *type = 3;
05043     s = tt+1;
05044     *val2 = x;
05045     return(s);
05046 }
05047 else if ( StrICmp(s,(UBYTE *)("isfactorized")) == 0 ) {
05048     UBYTE *tt;
05049     WORD numdol, numexp;
05050     *tt++ = c;
05051     while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
05052     if ( *t == '$' ) {
05053         t++; tt = t; while (chartype[*tt] <= 1 ) tt++;
05054         c = *tt; *tt = 0;
05055         if ( ( numdol = GetDollar(t) ) > 0 ) {
05056             if ( Dollars[numdol].factors != 0 ) x = 1;
05057             else x = 0;
05058         }
05059         else {
05060             MesPrint("@ %s should be the name of an expression or a $ variable",t-1);
05061             Terminate(-1);
05062         }
05063         *tt = c;
05064     }
05065     else {
05066         tt = SkipAName(t);
05067         c = *tt; *tt = 0;
05068         if ( GetName(AC.exprnames,t,&numexp,NOAUTO) == NAMENOTFOUND ) {
05069             MesPrint("@ %s should be the name of an expression or a $ variable",t);
05070             Terminate(-1);
05071         }
05072         else {
05073             if ( ( Expressions[numexp].vflags & ISFACTORIZED ) != 0 ) x = 1;
05074             else x = 0;
05075         }
05076         *tt = c;
05077     }
05078     while ( *tt == ' ' || *tt == '\t'
05079             || *tt == '\n' || *tt == '\r' ) tt++;
05080     if ( *tt != ')' ) {
05081         MesPrint("@Improper use of isfactorized($var) or isfactorized(expr)");

```

```

05082         Terminate(-1);
05083     }
05084     *type = 3;
05085     s = tt+1;
05086     *val2 = x;
05087     return(s);
05088 }
05089 else if ( StrICmp(s, (UBYTE *) "isdefined") == 0 ) {
05090     UBYTE *tt;
05091     *t++ = c;
05092     while ( *t == ' ' || *t == '\t' || *t == '\n' || *t == '\r' ) t++;
05093     tt = SkipAName(t);
05094     c = *tt; *tt = 0;
05095     if ( GetPreVar(t, WITHOUTERROR) != 0 ) x = 1;
05096     else x = 0;
05097     *tt = c;
05098     while ( *tt == ' ' || *tt == '\t'
05099             || *tt == '\n' || *tt == '\r' ) tt++;
05100     if ( *tt != ')' ) {
05101         MesPrint("@Improper use of isdefined(var)");
05102         Terminate(-1);
05103     }
05104     *type = 3;
05105     s = tt+1;
05106     *val2 = x;
05107     return(s);
05108 }
05109 else if ( StrICmp(s, (UBYTE *) "flag") == 0 ) {
05110     UBYTE *tt;
05111     WORD x = 0, numexp;
05112     {
05113         *t++ = c;
05114         while ( *t == ' ' || *t == '\t' ) t++;
05115         if ( FG.cTable[*t] != 1 ) goto flagerror;
05116         while ( FG.cTable[*t] == 1 ) x = 10*x + (*t++ - '0');
05117         if ( x < 1 || x > BITSINWORD ) {
05118             MesPrint("@Illegal number %d for flag in flag condition", x);
05119             goto flagerror;
05120         }
05121         while ( *t == ' ' || *t == '\t' ) t++;
05122         if ( *t != ',' ) goto flagerror;
05123         t++;
05124         while ( *t == ' ' || *t == '\t' ) t++;
05125         tt = SkipAName(t);
05126         c = *tt; *tt = 0;
05127         if ( GetName(AC.exprnames, t, &numexp, NOAUTO) == NAMENOTFOUND ) {
05128             MesPrint("@ %s should be the name of an expression", t);
05129             goto flagerror;
05130         }
05131         *tt = c;
05132         while ( *t == ' ' || *t == '\t' ) t++;
05133         if ( *tt != ')' ) {
05134 flagerror:
05135             MesPrint("@Improper use of flag(num,expr)");
05136             Terminate(-1);
05137             return(0);
05138         }
05139         if ( ( Expressions[numexp].uflags & ( 1 « (x-1) ) ) != 0 )
05140             *val2 = 1;
05141         else *val2 = 0;
05142         *type = 3;
05143         s = tt+1;
05144         return(s);
05145     }
05146 }
05147 else *t = c;
05148 }
05149 else if ( *t == '=' || *t == '<' || *t == '>' || *t == '!'
05150 || *t == ')' || *t == ' ' || *t == '\t' || *t == 0 || *t == '\n' ) {
05151     *val2 = 0;
05152     *type = 2;
05153     return(t);
05154 }
05155 else {
05156     MesPrint("@Illegal use of string in preprocessor condition: %s", s);
05157     Terminate(-1);
05158 }
05159 }
05160 while ( *t == '-' || *t == '+' || *t == ' ' || *t == '\t' ) {
05161     if ( *t == '-' ) sign = -sign;
05162     t++;
05163 }
05164 while ( chartype[*t] == 1 ) { x = 10*x + *t++ - '0'; }
05165 while ( *t == ' ' || *t == '\t' ) t++;
05166 if ( chartype[*t] == 8 || *t == ')' || *t == '=' || *t == 0 ) {
05167     *val2 = sign > 0 ? x: -x;
05168     *type = 1;

```

```

05169         return(t);
05170     }
05171     while ( chartype[*t] != 8 && *t != ')' && *t != '=' && *t ) t++;
05172     while ( ( t > s ) && ( t[-1] == ' ' || t[-1] == '\t' ) ) t--;
05173     *type = 2;
05174     *val2 = val;
05175     return(t);
05176 }
05177
05178 /*
05179     #] pParseObject :
05180     #[ PreCalc :
05181
05182     To be called when a { is encountered.
05183     Action: read first till matching }. This is to be stored.
05184     Next we look whether this is a set or whether it can be
05185     evaluated. If it is a set we consider it as a new stream.
05186     The stream will have to be deallocated when read completely.
05187     If it is to be evaluated we do that and put the result in
05188     a stream.
05189 */
05190
05191 UBYTE *PreCalc(void)
05192 {
05193     UBYTE *buff, *s = 0, *t, *newb, c;
05194     int size, i, n, parlevel = 0, bralevel = 0;
05195     LONG answer;
05196     ULONG uanswer;
05197     size = n = 0;
05198     buff = 0; c = '{';
05199     for (;;) {
05200         if ( n >= size ) {
05201             if ( size == 0 ) size = 72;
05202             else size *= 2;
05203             if ( ( newb = (UBYTE *)Malloc1(size+2, "{}") ) == 0 ) return(0);
05204             s = newb;
05205             if ( buff ) {
05206                 i = n;
05207                 t = buff;
05208                 NCOPYB(s,t,i);
05209                 M_free(buff,"pre calc buffer");
05210             }
05211             else s = newb;
05212             buff = newb;
05213         }
05214         *s++ = c; n++;
05215         c = GetChar(0);
05216         if ( c == 0 ) {
05217             Error0("Unmatched {}");
05218             M_free(buff,"precalc buffer");
05219             return(0);
05220         }
05221         else if ( c == '{' ) { bralevel++; }
05222         else if ( c == '}' ) {
05223             if ( --bralevel < 0 ) { *s++ = c; *s = 0; break; }
05224         }
05225         else if ( c == '(' ) { parlevel++; }
05226         else if ( c == ')' ) {
05227             if ( --parlevel < 0 ) { *s++ = c; *s = 0; goto setstring; }
05228         }
05229         else if ( chartype[c] != 1 && chartype[c] != 5
05230             && chartype[c] != 6 && c != '!' && c != '&'
05231             && c != '|' && c != '\\') { *s++ = c; *s = 0; goto setstring; }
05232     }
05233     if ( parlevel > 0 ) goto setstring;
05234 /*
05235     Try now to evaluate the string.
05236     If it works, copy the resulting value back into buff as a string.
05237 */
05238     answer = 0;
05239     if ( PreEval(buff+1,&answer) == 0 ) goto setstring;
05240     t = buff + size;
05241     s = buff;
05242     if ( answer < 0 ) { *s++ = '-'; }
05243     uanswer = LongAbs(answer);
05244     n = 0;
05245     do {
05246         *--t = ( uanswer % 10 ) + '0';
05247         uanswer /= 10;
05248         n++;
05249     } while ( uanswer > 0 );
05250     NCOPYB(s,t,n);
05251     *s = 0;
05252     setstring;;
05253 /*
05254     Open a stream that contains the current string.
05255     Mark it to be removed after termination.

```

```

05256 */
05257     if ( OpenStream(buff,PRECALCSTREAM,0,PRENOACTION) == 0 ) return(0);
05258     return(buff);
05259 }
05260
05261 /*
05262     #] PreCalc :
05263     #[ PreEval :
05264
05265     Operations are:
05266     +, -, *, /, %, &, |, ^, !,  ^% (postfix 2log), ^/ (postfix sqrt)
05267 */
05268
05269 UBYTE *PreEval(UBYTE *s, LONG *x)
05270 {
05271     LONG y, z, a;
05272     int tobemultiplied, tobeadded = 1, expsign, i;
05273     UBYTE *t;
05274     *x = 0; a = 1;
05275     while ( *s == ' ' || *s == '\t' ) s++;
05276     for(;;){
05277         if ( *s == '+' || *s == '-' ) {
05278             if ( *s == '-' ) tobeadded = -1;
05279             else tobeadded = 1;
05280             s++;
05281             while ( *s == '-' || *s == '+' || *s == ' ' || *s == '\t' ) {
05282                 if ( *s == '-' ) tobeadded = -tobeadded;
05283                 s++;
05284             }
05285         }
05286         tobemultiplied = 0;
05287         for(;;){
05288             while ( *s == ' ' || *s == '\t' ) s++;
05289             if ( *s <= '9' && *s >= '0' ) {
05290                 ULONG uy;
05291                 ParseNumber(uy,s)
05292                 y = uy; /* may cause an implementation-defined behaviour */
05293             }
05294             else if ( *s == '(' || *s == '{' ) {
05295                 if ( ( t = PreEval(s+1,&y) ) == 0 ) return(0);
05296                 s = t;
05297             }
05298             else return(0);
05299             while ( *s == ' ' || *s == '\t' ) s++;
05300             expsign = 1;
05301             while ( *s == '^' || *s == '!' ) {
05302                 s++;
05303                 if ( s[-1] == '!' ) { /* factorial of course */
05304                     while ( *s == ' ' || *s == '\t' ) s++;
05305                     if ( y < 0 ) {
05306                         MesPrint("@Negative value in preprocessor factorial: %1",y);
05307                         return(0);
05308                     }
05309                     else if ( y == 0 ) y = 1;
05310                     else if ( y > 1 ) {
05311                         z = y-1;
05312                         while ( z > 0 ) { y = y*z; z--; }
05313                     }
05314                     continue;
05315                 }
05316                 else if ( *s == '%' ) { /* ^% is postfix 2log */
05317                     s++;
05318                     while ( *s == ' ' || *s == '\t' ) s++;
05319                     z = y;
05320                     if ( z <= 0 ) {
05321                         MesPrint("@Illegal value in preprocessor logarithm: %1",z);
05322                         return(0);
05323                     }
05324                     y = 0; z >= 1;
05325                     while ( z ) { y++; z >= 1; }
05326                     continue;
05327                 }
05328                 else if ( *s == '/' ) { /* ^/ is postfix sqrt */
05329                     LONG yy, zz;
05330                     s++;
05331                     while ( *s == ' ' || *s == '\t' ) s++;
05332                     z = y;
05333                     if ( z <= 0 ) {
05334                         MesPrint("@Illegal value in preprocessor square root: %1",z);
05335                         return(0);
05336                     }
05337                     if ( z > 8 ) { /* Very crude integer square root */
05338                         zz = z;
05339                         yy = 0; zz >= 1;
05340                         while ( zz ) { yy++; zz >= 1; }
05341                         zz = z > (yy/2); i = 10; y = 0;
05342                         do {

```

```

05343         yy = zz/2 + z/(2*zz); i--;
05344         if ( y == yy ) break;
05345         y = zz; zz = yy;
05346     } while ( y != yy && i > 0 );
05347     while ( y*y < z ) y++;
05348     while ( y*y > z ) y--;
05349 }
05350 else if ( z >= 4 ) y = 2;
05351 else if ( z == 0 ) y = 0;
05352 else y = 1;
05353 continue;
05354 }
05355 while ( *s == ' ' || *s == '\t' ) s++;
05356 while ( *s == '-' || *s == '+' || *s == ' ' || *s == '\t' ) {
05357     if ( *s == '-' ) expsign = -expsign;
05358 }
05359 if ( *s <= '9' && *s >= '0' ) {
05360     ParseNumber(z,s)
05361 }
05362 else if ( *s == '(' || *s == '{' ) {
05363     if ( ( t = PreEval(s+1,&z) ) == 0 ) return(0);
05364     s = t;
05365 }
05366 else return(0);
05367 while ( *s == ' ' || *s == '\t' ) s++;
05368 y = iexp(y,(int)z);
05369 }
05370 if ( tobemultiplied == 0 ) {
05371     if ( expsign < 0 ) a = 1/y;
05372     else a = y;
05373 }
05374 else {
05375     if ( tobemultiplied > 2 && expsign != 1 ) {
05376         MesPrint("&Incorrect use of ^ with & or |. Use brackets!");
05377         Terminate(-1);
05378     }
05379     tobemultiplied *= expsign;
05380     if ( tobemultiplied == 1 ) a *= y;
05381     else if ( tobemultiplied == 3 ) a &= y;
05382     else if ( tobemultiplied == 4 ) a |= y;
05383     else {
05384         if ( y == 0 || tobemultiplied == -2 ) {
05385             MesPrint("@Division by zero in preprocessor calculator");
05386             Terminate(-1);
05387         }
05388         if ( tobemultiplied == 2 ) a %= y;
05389         else a /= y;
05390     }
05391 }
05392 if ( *s == '%' ) tobemultiplied = 2;
05393 else if ( *s == '*' ) tobemultiplied = 1;
05394 else if ( *s == '/' ) tobemultiplied = -1;
05395 else if ( *s == '&' ) tobemultiplied = 3;
05396 else if ( *s == '|' ) tobemultiplied = 4;
05397 else {
05398     ULONG ux, ua;
05399     ux = *x;
05400     ua = a;
05401     if ( tobeadded >= 0 ) ux += ua;
05402     else ux -= ua;
05403     *x = ULONGToLong(ux);
05404     if ( *s == ')' || *s == '}' ) return(s+1);
05405     else if ( *s == '-' || *s == '+' ) { tobeadded = 1; break; }
05406     else return(0);
05407 }
05408 s++;
05409 }
05410 }
05411 /* return(0); */
05412 }
05413
05414 /*
05415     #] PreEval :
05416     #[ AddToPreTypes :
05417 */
05418
05419 void AddToPreTypes(int type)
05420 {
05421     if ( AP.NumPreTypes >= AP.MaxPreTypes ) {
05422         int i, *newlist = (int *)Malloc1(sizeof(int)*(2*AP.MaxPreTypes+1)
05423             ,"preprocessor type lists");
05424         for ( i = 0; i <= AP.MaxPreTypes; i++ ) newlist[i] = AP.PreTypes[i];
05425         M_free(AP.PreTypes,"preprocessor type lists");
05426         AP.PreTypes = newlist;
05427         AP.MaxPreTypes = 2*AP.MaxPreTypes;
05428     }
05429     AP.PreTypes[++AP.NumPreTypes] = type;

```



```

05430 }
05431
05432 /*
05433     #] AddToPreTypes :
05434     #[ MessPreNesting :
05435 */
05436
05437 void MessPreNesting(int par)
05438 {
05439     MesPrint("@(%d)Illegal nesting of %sif, %sdo, %sprocedure and/or %sswitch",par);
05440 }
05441
05442 /*
05443     #] MessPreNesting :
05444     #[ DoPreAddSeparator :
05445
05446     Preprocessor directives "addseparator" and "rmseparator" add/remove
05447     separator characters used to separate function arguments.
05448     Example:
05449
05450         #define QQ "a|g|a"
05451         #addseparator %
05452         *Comma must be quoted!:
05453         #rmseparator ",", "
05454         #rmseparator |
05455         #call H(a,a%`QQ`)
05456
05457     Characters ' ', '\t' and '"' are ignored!
05458 */
05459
05460 int DoPreAddSeparator(UBYTE *s)
05461 {
05462     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05463     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05464     for(;*s != '\0';s++){
05465         while ( *s == ' ' || *s == '\t' || *s == '"' ) s++;
05466         /* Todo:
05467         if ( set_in(*s,invalidseparators) ) {
05468             MesPrint("@Invalid separator specified");
05469             return(-1);
05470         }
05471         */
05472         set_set(*s,AC.separators);
05473     }
05474     return(0);
05475 }
05476
05477 /*
05478     #] DoPreAddSeparator :
05479     #[ DoPreRmSeparator :
05480
05481     See commentary with DoPreAddSeparator
05482
05483     Characters ' ', '\t' and '"' are ignored!
05484 */
05485 int DoPreRmSeparator(UBYTE *s)
05486 {
05487     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05488     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05489     for(;*s != '\0';s++){
05490         while ( *s == ' ' || *s == '\t' || *s == '"' ) s++;
05491         set_del(*s,AC.separators);
05492     }
05493     return(0);
05494 }
05495
05496 /*
05497     #] DoPreRmSeparator :
05498     #[ DoExternal:
05499
05500     #external ["prevar"] command
05501 */
05502 int DoExternal(UBYTE *s)
05503 {
05504     #ifdef WITHEXTERNALCHANNEL
05505         UBYTE *prevar=0;
05506         int externalD= 0;
05507     #else
05508         DUMMYUSE(s);
05509     #endif
05510     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05511     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05512     if ( AP.preError ) return(0);
05513
05514     #ifdef WITHEXTERNALCHANNEL
05515         while ( *s == ' ' || *s == '\t' ) s++;
05516         if(*s == '"'){/*prevar to store the descriptor is defined*/

```

```

05517     prevar++;
05518
05519     if ( chartype[*s] == 0 )for( ;*s != '""'; s++)switch(chartype[*s]){
05520         case 10:/*'\0' fits here*/
05521             MesPrint("@Can't finde closing \"");
05522             Terminate(-1);
05523         case 0:case 1: continue;
05524         default:
05525             break;
05526     }
05527     if(*s != '""'){
05528         MesPrint("@Illegal name of preprocessor variable to store external channel");
05529         return(-1);
05530     }
05531     *s='\0';
05532     for(s++; *s == ' ' || *s == '\t'; s++);
05533 }
05534
05535 if(*s == '\0'){
05536     MesPrint("@Illegal external command");
05537     return(-1);
05538 }
05539 /*here s is a command*/
05540 /*See the file extcmd.c*/
05541 /*[08may2006 mt]:*/
05542 externalD=openExternalChannel(
05543     s,
05544     AX.daemonize,
05545     AX.shellname,
05546     AX.stderrname);
05547 /*:[08may2006 mt]*/
05548 if(externalD<1){/*error?*/
05549     /*Not quite correct - terminate the program on error:*/
05550     Error1("Can't start external program",s);
05551     return(-1);
05552 }
05553 /*Now external command runs.*/
05554
05555 if(prevar){/*Store the external channel descriptor in the provided variable:*/
05556     UBYTE buf[21];/* 64/Log_2[10] = 19.3, so this is enough forever...*/
05557     NumToStr(buf,externalD);
05558     if ( PutPreVar(prevar,buf,0,1) < 0 ) return(-1);
05559 }
05560
05561 AX.currentExternalChannel=externalD;
05562 /*[08may2006 mt]:*/
05563 if(AX.currentPrompt!=0){/*Change default terminator*/
05564     if(setTerminatorForExternalChannel( (char *)AX.currentPrompt)){
05565         MesPrint("@Prompt is too long");
05566         return(-1);
05567     }
05568 }
05569 setKillModeForExternalChannel(AX.killSignal,AX.killWholeGroup);
05570 /*:[08may2006 mt]*/
05571 return(0);
05572 #else /*ifdef WITHEXTERNALCHANNEL*/
05573 Error0("External channel: not implemented on this computer/system");
05574 return(-1);
05575 #endif /*ifdef WITHEXTERNALCHANNEL ... else*/
05576 }
05577
05578 /*
05579     #] DoExternal:
05580     #[ DoPrompt:
05581         #prompt string
05582 */
05583
05584 int DoPrompt(UBYTE *s)
05585 {
05586     #ifndef WITHEXTERNALCHANNEL
05587         DUMMYUSE(s);
05588     #endif
05589     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05590     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05591
05592     #ifdef WITHEXTERNALCHANNEL
05593         while ( *s == ' ' || *s == '\t' ) s++;
05594         if ( AX.currentPrompt )
05595             M_free(AX.currentPrompt,"external channel prompt");
05596         if ( *s == '\0' )
05597             AX.currentPrompt = (UBYTE *)strDupl((UBYTE *)"", "external channel prompt");
05598         else
05599             AX.currentPrompt = strDupl(s, "external channel prompt");
05600         if( setTerminatorForExternalChannel( (char *)AX.currentPrompt) > 0 ){
05601             MesPrint("@Prompt is too long");
05602             return(-1);
05603         }
05604     }

```

```

05604     /*else: if 0, ok; if -1, there is no current channel-ok, just prompt is stored.*/
05605     return(0);
05606 #else /*ifdef WITHEXTERNALCHANNEL*/
05607     Error0("External channel: not implemented on this computer/system");
05608     return(-1);
05609 #endif /*ifdef WITHEXTERNALCHANNEL ... else*/
05610 }
05611 /*
05612     #] DoPrompt:
05613     #[ DoSetExternal:
05614         #setexternal n
05615 */
05616 int DoSetExternal(UBYTE *s)
05617 {
05618     #ifdef WITHEXTERNALCHANNEL
05619         int n=0;
05620     #else
05621         DUMMYUSE(s);
05622     #endif
05623     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05624     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05625     if ( AP.preError ) return(0);
05626     #ifdef WITHEXTERNALCHANNEL
05627         while ( *s == ' ' || *s == '\t' ) s++;
05628         while ( charType[*s] == 1 ) { n = 10*n + *s++ - '0'; }
05629         while ( *s == ' ' || *s == '\t' ) s++;
05630         if (*s!='\0'){
05631             MesPrint("@setexternal: number expected");
05632             return(-1);
05633         }
05634         if(selectExternalChannel(n)<0){
05635             MesPrint("@setexternal: invalid number");
05636             return(-1);
05637         }
05638         AX.currentExternalChannel=n;
05639         return(0);
05640     #else /*ifdef WITHEXTERNALCHANNEL*/
05641         Error0("External channel: not implemented on this computer/system");
05642         return(-1);
05643     #endif /*ifdef WITHEXTERNALCHANNEL ... else*/
05644 }
05645 /*
05646     #] DoSetExternal:
05647     #[ DoSetExternalAttr:
05648 */
05649 static FORM_INLINE UBYTE *pickupword(UBYTE *s)
05650 {
05651     for(;*s>' ';s++)switch(*s){
05652         case '=':
05653         case ',':
05654         case ';':
05655             return(s);
05656     }/*for(;*s>' ';s++)switch(*s)*/
05657     return(s);
05658 }
05659 /*Returns 0 if the first string (case insensitively) equal to
05660 the beginning of the second string (of length n):
05661 */
05662 static inline int strINCmp(UBYTE *a, UBYTE *b, int n)
05663 {
05664     for(;n>0;n--)if(tolower(*a++)!=tolower(*b++))
05665         return(1);
05666     return(*a != '\0');
05667 }
05668 #define KILL "kill"
05669 #define KILLALL "killall"
05670 #define DAEMON "daemon"
05671 #define SHELL "shell"
05672 #define STDERR "stderr"
05673 #define TRUE_EXPR "true"
05674 #define FALSE_EXPR "false"
05675 #define NOSHELL "noshell"
05676 #define TERMINAL "terminal"
05677 /*
05678     Expects comma-separated list of pairs name=value
05679 */
05680 int DoSetExternalAttr(UBYTE *s)
05681 {
05682     #ifdef WITHEXTERNALCHANNEL
05683         int lnam,lval;

```

```

05691     UBYTE *nam,*val;
05692 #else
05693     DUMMYUSE(s);
05694 #endif
05695     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05696     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05697     if ( AP.preError ) return(0);
05698
05699 #ifdef WITHEXTERNALCHANNEL
05700     do{
05701         /*Read the name:*/
05702         while ( *s == ' ' || *s == '\t' ) s++;
05703         s=pickupword(nam=s);
05704         lnam=s-nam;
05705         while ( *s == ' ' || *s == '\t' ) s++;
05706         if(*s++!=''){
05707             MesPrint("@External channel:' ' expected instead of %s",s-1);
05708             return(-1);
05709         }
05710         /*Read the value:*/
05711         while ( *s == ' ' || *s == '\t' ) s++;
05712         val=s;
05713
05714         for(;;){
05715             UBYTE *m;
05716             s=pickupword(s);
05717             m=s;
05718             while ( *s == ' ' || *s == '\t' ) s++;
05719             if ( (*s == ',') || (*s == '\n') || (*s == ';') || (*s == '\0') ) {
05720                 s=m;
05721                 break;
05722             }
05723         } /*for(;;)*/
05724
05725         lval=s-val;
05726         while ( *s == ' ' || *s == '\t' ) s++;
05727
05728         if(strINcmp((UBYTE *)SHELL,nam,lnam)==0){
05729             if(AX.shellname!=NULL)
05730                 M_free(AX.shellname,"external channel shellname");
05731             if(strINcmp((UBYTE *)NOSHELL,val,lval)==0)
05732                 AX.shellname=NULL;
05733             else{
05734                 UBYTE *ch,*b;
05735                 b=ch=AX.shellname=Malloc1(lval+1,"external channel shellname");
05736                 while(ch-b<lval)
05737                     *ch++=*val++;
05738                 *ch='\0';
05739             }
05740         }else if(strINcmp((UBYTE *)DAEMON,nam,lnam)==0){
05741             if(strINcmp((UBYTE *)TRUE_EXPR,val,lval)==0)
05742                 AX.daemonize = 1;
05743             else if(strINcmp((UBYTE *)FALSE_EXPR,val,lval)==0)
05744                 AX.daemonize = 0;
05745             else{
05746                 MesPrint("@External channel:true or false expected for %s",DAEMON);
05747                 return(-1);
05748             }
05749         }else if(strINcmp((UBYTE *)KILLALL,nam,lnam)==0){
05750             if(strINcmp((UBYTE *)TRUE_EXPR,val,lval)==0)
05751                 AX.killWholeGroup = 1;
05752             else if(strINcmp((UBYTE *)FALSE_EXPR,val,lval)==0)
05753                 AX.killWholeGroup = 0;
05754             else{
05755                 MesPrint("@External channel: true or false expected for %s",KILLALL);
05756                 return(-1);
05757             }
05758         }else if(strINcmp((UBYTE *)KILL,nam,lnam)==0){
05759             int i,n=0;
05760             for(i=0;i<lval;i++){
05761                 if( *val>='0' && *val<= '9' )
05762                     n = 10*n + *val++ - '0';
05763                 else{
05764                     MesPrint("@External channel: number expected for %s",KILL);
05765                     return(-1);
05766                 }
05767             }
05768             AX.killSignal=n;
05769         }else if(strINcmp((UBYTE *)STDERR,nam,lnam)==0){
05770             if( AX.stdername != NULL ) {
05771                 M_free(AX.stdername,"external channel stderrname");
05772             }
05773             if(strINcmp((UBYTE *)TERMINAL,val,lval)==0)
05774                 AX.stdername = NULL;
05775             else{
05776                 UBYTE *ch,*b;
05777                 b=ch=AX.stdername=Malloc1(lval+1,"external channel stderrname");

```

```

05778         while(ch-b<lval)
05779             *ch++=*val++;
05780         *ch='\0';
05781     }
05782 }else{
05783     nam[lname+1]='\0';
05784     MesPrint("@External channel: unrecognized attribute",nam);
05785     return(-1);
05786 }
05787 }while(*s++ == ' ');
05788 if( (*s-1)>' ')&&(*s-1)!=';') {
05789     MesPrint("@External channel: syntax error: %s",s-1);
05790     return(-1);
05791 }
05792 return(0);
05793 #else /*ifdef WITHEXTERNALCHANNEL*/
05794     Error0("External channel: not implemented on this computer/system");
05795     return(-1);
05796 #endif /*ifdef WITHEXTERNALCHANNEL ... else*/
05797 }
05798 /*
05799     #] DoSetExternalAttr:
05800     #[ DoRmExternal:
05801         #rmexternal [n] (if 0, close all)
05802 */
05803
05804 int DoRmExternal(UBYTE *s)
05805 {
05806     #ifdef WITHEXTERNALCHANNEL
05807         int n = -1;
05808     #else
05809         DUMMYUSE(s);
05810     #endif
05811     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05812     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05813     if ( AP.preError ) return(0);
05814
05815     #ifdef WITHEXTERNALCHANNEL
05816         while ( *s == ' ' || *s == '\t' ) s++;
05817         if( chartype[*s] == 1 ){
05818             for(n=0; chartype[*s] == 1 ; s++) { n = 10*n + *s - '0'; }
05819             while ( *s == ' ' || *s == '\t' ) s++;
05820         }
05821         if(*s!='\0'){
05822             MesPrint("@rmexternal: invalid number");
05823             return(-1);
05824         }
05825         switch(n){
05826             case 0:/*Close all opened channels*/
05827                 closeAllExternalChannels();
05828                 AX.currentExternalChannel=0;
05829                 /*Do not clean AX.currentPrompt!*/
05830                 return(0);
05831             case -1:/*number is not specified - try current*/
05832                 n=AX.currentExternalChannel;
05833                 /* fall through */
05834             default:
05835                 closeExternalChannel(n);/*No reaction for possible error*/
05836         }
05837         if (n == AX.currentExternalChannel)/*cleaned up by closeExternalChannel()*/
05838             AX.currentExternalChannel=0;
05839         return(0);
05840     #else /*ifdef WITHEXTERNALCHANNEL*/
05841         Error0("External channel: not implemented on this computer/system");
05842         return(-1);
05843     #endif /*ifdef WITHEXTERNALCHANNEL ... else*/
05844 }
05845
05846 /*
05847     #] DoRmExternal:
05848     #[ DoFromExternal :
05849         #fromexternal
05850             is used to read the text from the running external
05851             program, the syntax is similar to the #include
05852             directive.
05853         #fromexternal "varname"
05854             is used to read the text from the running external
05855             program into the preprocessor variable varname.
05856             directive.
05857         #fromexternal "varname" maxlength
05858             is used to read the text from the running external
05859             program into the preprocessor variable varname.
05860             directive. Only first maxlength characters are
05861             stored.
05862
05863             FORM continues to read the running external
05864             program output until the external program outputs a

```

```

05865             prompt.
05866
05867 */
05868
05869 int DoFromExternal(UBYTE *s)
05870 {
05871 #ifdef WITHEXTERNALCHANNEL
05872     UBYTE *prevar=0;
05873     int lbuf=-1;
05874     int withNoList=AC.NoShowInput;
05875     int oldpreassignflag;
05876 #else
05877     DUMMYUSE(s);
05878 #endif
05879     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
05880     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
05881     if ( AP.preError ) return(0);
05882 #ifdef WITHEXTERNALCHANNEL
05883
05884     FLUSHCONSOLE;
05885
05886     while ( *s == ' ' || *s == '\t' ) s++;
05887     /*[17may2006 mt]:*/
05888     if ( *s == '-' || *s == '+' ) {
05889         if ( *s == '-' )
05890             withNoList = 1;
05891         else
05892             withNoList = 0;
05893         s++;
05894         while ( *s == ' ' || *s == '\t' ) s++;
05895     }/*if ( *s == '-' || *s == '+' )*/
05896     /*:[17may2006 mt]*/
05897     /*[02feb2006 mt]:*/
05898     if(*s == '"')/*prevar to store the output is defined*/
05899         prevar=++s;
05900
05901     if ( *s=='$' || chartype[*s] == 0 )for(;*s != '"'; s++)switch(chartype[*s]){
05902         case 10:/*'\0' fits here*/
05903             MesPrint("@Can't finde closing \"");
05904             Terminate(-1);
05905         case 0:case 1: continue;
05906         default:
05907             break;
05908     }
05909     if(*s != '"'){
05910         MesPrint("@Illegal name to store output of external channel");
05911         return(-1);
05912     }
05913     *s='\0';
05914     for(s++; *s == ' ' || *s == '\t'; s++);
05915 }/*if(*s == '"')*/
05916
05917 if(*s != '\0'){
05918     if( chartype[*s] == 1 ){
05919         for(lbuf=0; chartype[*s] == 1 ; s++) { lbuf = 10*lbuf + *s - '0'; }
05920         while ( *s == ' ' || *s == '\t' ) s++;
05921     }
05922     if( (*s!='\0')||(lbuf<0) ){
05923         MesPrint("@Illegal buffer length in fromexternal");
05924         return(-1);
05925     }
05926 }/*if(*s != '\0')*/
05927 /*:[02feb2006 mt]*/
05928 if(getCurrentExternalChannel() != AX.currentExternalChannel)
05929     /*[08may2006 mt]:*/
05930     /*selectExternalChannel(AX.currentExternalChannel);*/
05931     if(selectExternalChannel(AX.currentExternalChannel)){
05932         MesPrint("@No current external channel");
05933         return(-1);
05934     }
05935     /*:[08may2006 mt]*/
05936
05937 /*[02feb2006 mt]:*/
05938 if(prevar!=0){/*The result must be stored into preprovar*/
05939     UBYTE *buf;
05940     int cc = 0;
05941     if(lbuf == -1){/*Unlimited buffer, everything must be stored*/
05942         int i;
05943         buf=Malloc1( (lbuf=255)+1,"Fromexternal");
05944         /*[18may2006 mt]:*/
05945         /*for(i=0; (cc=getcFromExtChannel()) != EOF; i++) {*/
05946         /* May 2006: now getcFromExtChannelOk returns EOF while
05947         getcFromExtChannelFailure returns -2 (see comments in
05948         exctcmd.c):*/
05949         for(i=0; (cc=getcFromExtChannel())>0; i++) {
05950             /*:[18may2006 mt]*/
05951             if(i==lbuf){

```

```

05952         int j;
05953         UBYTE *tmp=Malloc1( (lbuf*=2)+1,"Fromexternal");
05954         for (j=0;j<i;j++)tmp[j]=buf[j];
05955         M_free(buf,"Fromexternal");
05956         buf=tmp;
05957     }
05958     buf[i]=(UBYTE)(cc);
05959     }/*for(i=0;(cc=getcFromExtChannel())>0;i++)*/
05960     /*[18may20006 mt]*/
05961     if(cc == -2){
05962         MesPrint("@No current external channel");
05963         return(-1);
05964     }
05965     lbuf=i;
05966     /*:[18may20006 mt]*/
05967     buf[i]='\0';
05968 }else{/*Fixed buffer, only lbuf chars must be stored*/
05969     int i;
05970     buf=Malloc1(lbuf+1,"Fromexternal");
05971     for(i=0; i<lbuf;i++){
05972         /*[18may20006 mt]*/
05973         /*if( (cc=getcFromExtChannel())==EOF )*/
05974         /* May 2006: now getcFromExtChannelOk returns EOF while
05975            getcFromExtChannelFailure returns -2 (see comments in
05976            exctcmd.c)*/
05977         if( (cc=getcFromExtChannel())<1 )
05978             /*:[18may20006 mt]*/
05979             break;
05980         buf[i]=(UBYTE)(cc);
05981     }
05982     buf[i]='\0';
05983     /*[18may20006 mt]*/
05984     /*if(cc!=EOF)
05985         while(getcFromExtChannel()!=EOF);**/*Eat the rest*/
05986     /* May 2006: now getcFromExtChannelOk returns EOF while
05987        getcFromExtChannelFailure returns -2 (see comments in
05988        exctcmd.c)*/
05989     if(cc>0)
05990         while(getcFromExtChannel()>0);/*Eat the rest*/
05991     else if(cc == -2){
05992         MesPrint("@No current external channel");
05993         return(-1);
05994     }
05995     /*:[18may20006 mt]*/
05996 }
05997 /*[18may20006 mt]*/
05998 if(*prevar == '$'){/*Put the answer to the dollar variable*/
05999     int oldNumPotModdollars = NumPotModdollars;
06000 #ifdef WITHMPI
06001     WORD oldRhsExprInModuleFlag = AC.RhsExprInModuleFlag;
06002     AC.RhsExprInModuleFlag = 0;
06003 #endif
06004     /*Here lbuf is the actual length of buf!*/
06005     /*"prevar=buf'\0'":*/
06006     UBYTE *pbuf=Malloc1(StrLen(prevar)+1+lbuf+1,"Fromexternal to dollar");
06007     UBYTE *c=pbuf;
06008     UBYTE *b=prevar;
06009     while(*b!='\0'){*c++ = *b++;}
06010     *c++='=';
06011     b=buf;
06012     while( (*c++=*b++)!='\0' );
06013     oldpreassignflag = AP.PreAssignFlag;
06014     AP.PreAssignFlag = 1;
06015     if ( ( cc = CompileStatement(pbuf) ) || ( cc = CatchDollar(0) ) ) {
06016         Error1("External channel: can't assign output to dollar variable ",prevar);
06017     }
06018     AP.PreAssignFlag = oldpreassignflag;
06019     NumPotModdollars = oldNumPotModdollars;
06020 #ifdef WITHMPI
06021     AC.RhsExprInModuleFlag = oldRhsExprInModuleFlag;
06022 #endif
06023     M_free(pbuf,"Fromexternal to dollar");
06024 }else{
06025     cc = PutPreVar(prevar, buf, 0, 1) < 0;
06026 }
06027 /*:[18may20006 mt]*/
06028 M_free(buf,"Fromexternal");
06029 if ( cc ) return(-1);
06030 return(0);
06031 }
06032 /*:[02feb2006 mt]*/
06033 if ( OpenStream(s,EXTERNALCHANNELSTREAM,0,PREENOACTION) == 0 ) return(-1);
06034 /*[17may2006 mt]*/
06035 AC.NoShowInput = withNoList;
06036 /*:[17may2006 mt]*/
06037 return(0);
06038 #else

```

```

06039     Error0("External channel: not implemented on this computer/system");
06040     return(-1);
06041 #endif
06042 }
06043
06044 /*
06045     #] DoFromExternal :
06046     #[ DoToExternal :
06047         #toexetrnal
06048 */
06049
06050 #ifdef WITHEXTERNALCHANNEL
06051
06052 /*A wrapper to writeBufToExtChannel, see the file extcmd.c:*/
06053 LONG WriteToExternalChannel(int handle, UBYTE *buffer, LONG size)
06054 {
06055     /*ATT! handle is not used! Actual output is performed to
06056        the current external channel, see extcmd.c!*/
06057     DUMMYUSE(handle);
06058     if(writeBufToExtChannel((char*)buffer,size))
06059         return(-1);
06060     return(size);
06061 }
06062 #endif /*ifdef WITHEXTERNALCHANNEL*/
06063
06064 int DoToExternal(UBYTE *s)
06065 {
06066     #ifdef WITHEXTERNALCHANNEL
06067         HANDLERS h;
06068         LONG (*OldWrite)(int handle, UBYTE *buffer, LONG size) = WriteFile;
06069         int ret=-1;
06070     #else
06071         DUMMYUSE(s);
06072     #endif
06073     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
06074     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
06075     if ( AP.preError ) return(0);
06076     #ifdef WITHEXTERNALCHANNEL
06077
06078     h.oldsilent=AM.silent;
06079     h.newlogonly = h.oldlogonly = AM.FileOnlyFlag;
06080     h.newhandle = h.oldhandle = AC.LogHandle;
06081     h.oldprinttype = AO.PrintType;
06082
06083     WriteFile=&WriteToExternalChannel;
06084
06085     while ( *s == ' ' || *s == '\t' ) s++;
06086
06087     if(AX.currentExternalChannel==0){
06088         MesPrint("@No current external channel");
06089         goto DoToExternalReady;
06090     }
06091
06092     if(getCurrentExternalChannel()!=AX.currentExternalChannel)
06093         selectExternalChannel(AX.currentExternalChannel);
06094
06095     ret=writeToChannel(EXTERNALCHANNELOUT,s,&h);
06096     DoToExternalReady:
06097         WriteFile=OldWrite;
06098         return(ret);
06099     #else /*ifdef WITHEXTERNALCHANNEL*/
06100     Error0("External channel: not implemented on this computer/system");
06101     return(-1);
06102 #endif /*ifdef WITHEXTERNALCHANNEL ... else*/
06103
06104 }
06105
06106 /*
06107     #] DoToExternal :
06108     #[ defineChannel :
06109 */
06110
06111 UBYTE *defineChannel(UBYTE *s, HANDLERS *h)
06112 {
06113     UBYTE *name,*to;
06114
06115     if ( *s != '<' )
06116         return(s);
06117
06118     s++;
06119     name = to = s;
06120     while ( *s && *s != '>' ) {
06121         if ( *s == '\\\ ' ) s++;
06122         *to++ = *s++;
06123     }
06124     if ( *s == 0 ) {
06125         MesPrint("@Improper termination of filename");

```



```

06126         return(0);
06127     }
06128     s++;
06129     *to = 0;
06130     if ( *name ) {
06131         h->newhandle = GetChannel((char *)name,0);
06132         h->newlogonly = 1;
06133     }
06134     else if ( AC.LogHandle >= 0 ) {
06135         h->newhandle = AC.LogHandle;
06136         h->newlogonly = 1;
06137     }
06138     return(s);
06139 }
06140
06141 /*
06142     #] defineChannel :
06143     #[ writeToChannel :
06144 */
06145
06146 int writeToChannel(int wtype, UBYTE *s, HANDLERS *h)
06147 {
06148     UBYTE *to, *fstring, *ss, *sss, *sl, c, cl;
06149     WORD num, number, nfac;
06150     WORD oldOptimizationLevel;
06151     UBYTE Out[MAXLINELENGTH+14], *stopper;
06152     int nosemi, i;
06153     int plus = 0;
06154
06155     /*
06156     Now determine the format string
06157     */
06158     while ( *s == ',' || *s == ' ' ) s++;
06159     if ( *s != '"' ) {
06160         MesPrint("@No format string present");
06161         return(-1);
06162     }
06163     s++; fstring = to = s;
06164     while ( *s ) {
06165         if ( *s == '\\' ) {
06166             s++;
06167             if ( *s == '\\' ) {
06168                 *to++ = *s++;
06169                 if ( *s == '\\' ) *to++ = *s++;
06170             }
06171             else if ( *s == '"' ) *to++ = *s++;
06172             else { *to++ = '\\'; *to++ = *s++; }
06173         }
06174         else if ( *s == '"' ) break;
06175         else *to++ = *s++;
06176     }
06177     if ( *s != '"' ) {
06178         MesPrint("@No closing \" in format string");
06179         return(-1);
06180     }
06181     *to = 0; s++;
06182     if ( AC.LineLength > 20 && AC.LineLength <= MAXLINELENGTH ) stopper = Out + AC.LineLength;
06183     else stopper = Out + MAXLINELENGTH;
06184     to = Out;
06185     /*
06186     s points now at the list of objects (if any)
06187     we can start executing the format string.
06188     */
06189     AM.silent = 0;
06190     AC.LogHandle = h->newhandle;
06191     AM.FileOnlyFlag = h->newlogonly;
06192     if ( h->newhandle >= 0 ) {
06193         AO.PrintType |= PRINTLFILE;
06194     }
06195     while ( *fstring ) {
06196         if ( to >= stopper ) {
06197             if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90 ) {
06198                 *to++ = '&';
06199             }
06200             num = to - Out;
06201             WriteString(wtype,Out,num);
06202             to = Out;
06203             if ( AC.OutputMode == FORTRANMODE
06204                 || AC.OutputMode == PFORTRANMODE ) {
06205                 number = 7;
06206                 for ( i = 0; i < number; i++ ) *to++ = ' ';
06207                 to[-2] = '&';
06208             }
06209         }
06210         if ( *fstring == '\\' ) {
06211             fstring++;
06212             if ( *fstring == 'n' ) {

```

```

06213         num = to - Out;
06214         WriteString(wtype,Out,num);
06215         to = Out;
06216         fstring++;
06217     }
06218     else if ( *fstring == 't' ) { *to++ = '\t'; fstring++; }
06219     else if ( *fstring == 'b' ) { *to++ = '\\'; fstring++; }
06220     else *to++ = *fstring++;
06221 }
06222 else if ( *fstring == '%' ) {
06223     plus = 0;
06224 retry:
06225     fstring++;
06226     if ( *fstring == 'd' ) {
06227         int sign,dig;
06228         number = -1;
06229 donumber:
06230         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
06231         sign = 1;
06232         while ( *s == '+' || *s == '-' ) {
06233             if ( *s == '-' ) sign = -sign;
06234             s++;
06235         }
06236         dig = 0; ss = s; if ( sign < 0 ) { ss--; *ss = '-'; dig++; }
06237         while ( *s >= '0' && *s <= '9' ) { s++; dig++; }
06238         if ( number < 0 ) {
06239             while ( ss < s ) {
06240                 if ( to >= stopper ) {
06241                     num = to - Out;
06242                     WriteString(wtype,Out,num);
06243                     to = Out;
06244                 }
06245                 if ( *ss == '\\ ' ) ss++;
06246                 *to++ = *ss++;
06247             }
06248         }
06249         else {
06250             if ( number < dig ) { dig = number; ss = s - dig; }
06251             while ( number > dig ) {
06252                 if ( to >= stopper ) {
06253                     num = to - Out;
06254                     WriteString(wtype,Out,num);
06255                     to = Out;
06256                 }
06257                 *to++ = ' '; number--;
06258             }
06259             while ( ss < s ) {
06260                 if ( to >= stopper ) {
06261                     num = to - Out;
06262                     WriteString(wtype,Out,num);
06263                     to = Out;
06264                 }
06265                 if ( *ss == '\\ ' ) ss++;
06266                 *to++ = *ss++;
06267             }
06268         }
06269         fstring++;
06270     }
06271     else if ( *fstring == '$' ) {
06272         UBYTE *dolalloc;
06273         number = AO.OutSkip;
06274 dodollar:
06275         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
06276         if ( AC.OutputMode == FORTRANMODE
06277             || AC.OutputMode == PFORTRANMODE ) {
06278             number = 7;
06279         }
06280         if ( *s != '$' ) {
06281 nodollar:
06282             MesPrint("@$-variable expected in #write instruction");
06283             AM.FileOnlyFlag = h->oldlogonly;
06284             AC.LogHandle = h->oldhandle;
06285             AO.PrintType = h->oldprinttype;
06286             AM.silent = h->oldsilent;
06287             return(-1);
06288         }
06289         s++; ss = s;
06290         while ( chartype[*s] <= 1 ) s++;
06291         if ( s == ss ) goto nodollar;
06292         c = *s; *s = 0;
06293         num = GetDollar(ss);
06294         if ( num < 0 ) {
06295             MesPrint("@#write instruction: %s has not been defined",ss);
06296             AM.FileOnlyFlag = h->oldlogonly;
06297             AC.LogHandle = h->oldhandle;
06298             AO.PrintType = h->oldprinttype;
06299             AM.silent = h->oldsilent;
06300             return(-1);

```

```

06300     }
06301     *s = c;
06302     if ( *s == '[' ) {
06303         if ( Dollars[num].nfactors <= 0 ) {
06304             *s = 0;
06305             MesPrint("@#write instruction: $$s has not been factorized",ss);
06306             AM.FileOnlyFlag = h->oldlogonly;
06307             AC.LogHandle = h->oldhandle;
06308             AO.PrintType = h->oldprinttype;
06309             AM.silent = h->oldsilent;
06310             return(-1);
06311         }
06312         /*
06313         Now get the number between the []
06314         */
06315         nfac = GetDollarNumber(&s,Dollars+num);
06316
06317         if ( Dollars[num].nfactors == 1 && nfac == 1 ) goto writewhole;
06318
06319         if ( ( dolalloc = WriteDollarFactorToBuffer(num,nfac,0) ) == 0 ) {
06320             AM.FileOnlyFlag = h->oldlogonly;
06321             AC.LogHandle = h->oldhandle;
06322             AO.PrintType = h->oldprinttype;
06323             AM.silent = h->oldsilent;
06324             return(-1);
06325         }
06326         goto writealloc;
06327     }
06328     else if ( *s && *s != ' ' && *s != ',' && *s != '\t' ) {
06329         MesPrint("@#write instruction: illegal characters after $-variable");
06330         AM.FileOnlyFlag = h->oldlogonly;
06331         AC.LogHandle = h->oldhandle;
06332         AO.PrintType = h->oldprinttype;
06333         AM.silent = h->oldsilent;
06334         return(-1);
06335     }
06336     else {
06337 writewhole:
06338         if ( ( dolalloc = WriteDollarToBuffer(num,0) ) == 0 ) {
06339             AM.FileOnlyFlag = h->oldlogonly;
06340             AC.LogHandle = h->oldhandle;
06341             AO.PrintType = h->oldprinttype;
06342             AM.silent = h->oldsilent;
06343             return(-1);
06344         }
06345         else {
06346 writealloc:
06347             ss = dolalloc;
06348             while ( *ss ) {
06349                 if ( to >= stopper ) {
06350                     if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90 ) {
06351                         *to++ = '&';
06352                     }
06353                     num = to - Out;
06354                     WriteString(wtype,Out,num);
06355                     to = Out;
06356                     for ( i = 0; i < number; i++ ) *to++ = ' ';
06357                     if ( AC.OutputMode == FORTRANMODE
06358                         || AC.OutputMode == PFORTRANMODE ) to[-2] = '&';
06359                 }
06360                 if ( chartype[*ss] > 3 ) { *to++ = *ss++; }
06361                 else {
06362                     sss = ss; while ( chartype[*ss] <= 3 ) ss++;
06363                     if ( ( to + (ss-sss) ) >= stopper ) {
06364                         if ( (ss-sss) >= (stopper-Out) ) {
06365                             if ( ( to - stopper ) < 10 ) {
06366                                 if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 ==
ISFORTRAN90 ) {
06367                                     *to++ = '&';
06368                                 }
06369                                 num = to - Out;
06370                                 WriteString(wtype,Out,num);
06371                                 to = Out;
06372                                 for ( i = 0; i < number; i++ ) *to++ = ' ';
06373                                 if ( AC.OutputMode == FORTRANMODE
06374                                     || AC.OutputMode == PFORTRANMODE ) to[-2] = '&';
06375                             }
06376                             while ( (ss-sss) >= (stopper-Out) ) {
06377                                 while ( to < stopper-1 ) {
06378                                     *to++ = *sss++;
06379                                 }
06380                                 if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 ==
ISFORTRAN90 ) {
06381                                     *to++ = '&';
06382                                 }
06383                                 else {
06384                                     *to++ = '\\';

```

```

06385                                     }
06386                                     num = to - Out;
06387                                     WriteString(wtype,Out,num);
06388                                     to = Out;
06389                                     if ( AC.OutputMode == FORTRANMODE
06390                                         || AC.OutputMode == PFORTRANMODE ) {
06391                                         for ( i = 0; i < number; i++ ) *to++ = ' ';
06392                                         to[-2] = '&';
06393                                     }
06394                                     }
06395                                     }
06396                                     else {
06397                                         if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90
06398                                             ) {
06399                                             *to++ = '&';
06400                                             }
06401                                             num = to - Out;
06402                                             WriteString(wtype,Out,num);
06403                                             to = Out;
06404                                             for ( i = 0; i < number; i++ ) *to++ = ' ';
06405                                             if ( AC.OutputMode == FORTRANMODE
06406                                                 || AC.OutputMode == PFORTRANMODE ) to[-2] = '&';
06407                                             }
06408                                             while ( sss < ss ) *to++ = *sss++;
06409                                         }
06410                                     }
06411                                     }
06412                                     M_free(dolalloc,"written dollar");
06413                                     fstring++;
06414                                 }
06415                             }
06416                             else if ( *fstring == 's' ) {
06417                                 fstring++;
06418                                 while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
06419                                 if ( *s == '"' ) {
06420                                     s++; ss = s;
06421                                     while ( *s ) {
06422                                         if ( *s == '\\' ) s++;
06423                                         else if ( *s == '"' ) break;
06424                                         s++;
06425                                     }
06426                                     if ( *s == 0 ) {
06427                                         MesPrint("@#write instruction: Missing \" in string");
06428                                         AM.FileOnlyFlag = h->oldlogonly;
06429                                         AC.LogHandle = h->oldhandle;
06430                                         AO.PrintType = h->oldprinttype;
06431                                         AM.silent = h->oldsilent;
06432                                         return(-1);
06433                                     }
06434                                     while ( ss < s ) {
06435                                         if ( to >= stopper ) {
06436                                             num = to - Out;
06437                                             WriteString(wtype,Out,num);
06438                                             to = Out;
06439                                         }
06440                                         if ( *ss == '\\' ) ss++;
06441                                         *to++ = *ss++;
06442                                     }
06443                                     s++;
06444                                 }
06445                                 else {
06446                                     sss = ss = s;
06447                                     while ( *s && *s != ',' ) {
06448                                         if ( *s == '\\' ) { s++; sss = s+1; }
06449                                         s++;
06450                                     }
06451                                     while ( s > sss+1 && ( s[-1] == ' ' || s[-1] == '\t' ) ) s--;
06452                                     while ( ss < s ) {
06453                                         if ( to >= stopper ) {
06454                                             num = to - Out;
06455                                             WriteString(wtype,Out,num);
06456                                             to = Out;
06457                                         }
06458                                         if ( *ss == '\\' ) ss++;
06459                                         *to++ = *ss++;
06460                                     }
06461                                 }
06462                             }
06463                             else if ( *fstring == 'X' ) {
06464                                 fstring++;
06465                                 if ( cbuf[AM.sbufnum].numrhs > 0 ) {
06466                                     /*
06467                                     This should be only to the value of AM.oldnumextrasyms
06468                                     */
06469                                     UBYTE *s = GetPreVar(AM.oldnumextrasyms,0);
06470                                     WORD x = 0;

```

```

06471         while ( *s >= '0' && *s <= '9' ) x = 10*x + *s++ - '0';
06472         if ( x > 0 )
06473             PrintSubtermList(1,x);
06474         else
06475             PrintSubtermList(1,cbuf[AM.sbufnum].numrhs);
06476     }
06477 }
06478 else if ( *fstring == 'O' ) {
06479     number = AO.OutSkip;
06480 dooptim:
06481     fstring++;
06482 /*
06483     First test whether there is an optimization buffer
06484 */
06485     if ( AO.OptimizeResult.code == NULL && AO.OptimizationLevel != 0 ) {
06486         MesPrint("@In #write instruction: no optimization results available!");
06487         return(-1);
06488     }
06489     num = to - Out;
06490     WriteString(wtype,Out,num);
06491     to = Out;
06492     if ( AO.OptimizationLevel != 0 ) {
06493         WORD oldoutskip = AO.OutSkip;
06494         AO.OutSkip = number;
06495         optimize_print_code(0);
06496         AO.OutSkip = oldoutskip;
06497     }
06498 }
06499 else if ( *fstring == 'e' || *fstring == 'E' ) {
06500     if ( *fstring == 'E'
06501         || AC.OutputMode == FORTRANMODE
06502         || AC.OutputMode == PFORTRANMODE ) nosemi = 1;
06503     else nosemi = 0;
06504     fstring++;
06505     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
06506     if ( chartype[*s] != 0 && *s != '[' ) {
06507 noexpr:
06508         MesPrint("@expression name expected in #write instruction");
06509         AM.FileOnlyFlag = h->oldlogonly;
06510         AC.LogHandle = h->oldhandle;
06511         AO.PrintType = h->oldprinttype;
06512         AM.silent = h->oldsilent;
06513         return(-1);
06514     }
06515     ss = s;
06516     if ( ( s = SkipAName(ss) ) == 0 || s[-1] == '_' ) goto noexpr;
06517     s1 = s; c = c1 = *s1;
06518     if ( c1 == '(' ) {
06519         SKIPBRA3(s)
06520         if ( *s == ')' ) {
06521             AO.CurBufWrt = s1+1;
06522             c = *s; *s = 0;
06523         }
06524         else {
06525             MesPrint("@Illegal () specifier in expression name in #write");
06526             AM.FileOnlyFlag = h->oldlogonly;
06527             AC.LogHandle = h->oldhandle;
06528             AO.PrintType = h->oldprinttype;
06529             AM.silent = h->oldsilent;
06530             return(-1);
06531         }
06532     }
06533     else AO.CurBufWrt = (UBYTE *)underscore;
06534     *s1 = 0;
06535     num = to - Out;
06536     if ( num > 0 ) WriteUnfinString(wtype,Out,num);
06537     to = Out;
06538     oldOptimizationLevel = AO.OptimizationLevel;
06539     AO.OptimizationLevel = 0;
06540     if ( WriteOne(ss,(int)num,nosemi,plus) < 0 ) {
06541         AM.FileOnlyFlag = h->oldlogonly;
06542         AC.LogHandle = h->oldhandle;
06543         AO.PrintType = h->oldprinttype;
06544         AM.silent = h->oldsilent;
06545         return(-1);
06546     }
06547     AO.OptimizationLevel = oldOptimizationLevel;
06548     *s1 = c1;
06549     if ( s > s1 ) *s++ = c;
06550 }
06551 /*
06552 File content
06553 */
06554 else if ( ( *fstring == 'f' ) || ( *fstring == 'F' ) ) {
06555     LONG n;
06556     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
06557     ss = s;
06558     while ( *s && *s != ',' ) {

```

```

06558         if ( *s == '\\\\' ) s++;
06559         s++;
06560     }
06561     c = *s; *s = 0;
06562     s1 = LoadInputFile(ss,HEADERFILE);
06563     *s = c;
06564     /*
06565     There should have been a way to pass the file size.
06566     Also there should be conversions for \r\n etc.
06567     */
06568     if ( s1 ) {
06569         ss = s1; while ( *ss ) ss++;
06570         n = ss-s1;
06571         WriteString(wtype,s1,n);
06572         M_free(s1,"copy file");
06573     }
06574     else if ( *fstring == 'F' ) {
06575         *s = 0;
06576         MesPrint("@Error in #write: could not open file %s",ss);
06577         *s = c;
06578         goto ReturnWithError;
06579     }
06580     fstring++;
06581 }
06582 else if ( *fstring == '%' ) {
06583     *to++ = *fstring++;
06584 }
06585 else if ( FG.cTable[*fstring] == 1 ) { /* %#S */
06586     number = 0;
06587     while ( FG.cTable[*fstring] == 1 ) {
06588         number = 10*number + *fstring++ - '0';
06589     }
06590     if ( *fstring == 'O' ) goto dooptim;
06591     else if ( *fstring == 'd' ) goto donumber;
06592     else if ( *fstring == '$' ) goto dodollar;
06593     else if ( *fstring == 't' ) { /* 'tab' position */
06594         if ( number < (WORD)(stopper-Out) ) {
06595             while ( (WORD)(to-Out) < number ) *to++ = ' ';
06596         }
06597         fstring++;
06598     }
06599     else if ( *fstring == 'X' || *fstring == 'x' ) {
06600         if ( number > 0 && number <= cbuf[AM.sbufnum].numrhs ) {
06601             UBYTE buffer[80], *out, *old1, *old2, *old3;
06602             WORD *term, first;
06603             if ( *fstring == 'X' ) {
06604                 out = StrCopy((UBYTE *)AC.extrasym,buffer);
06605                 if ( AC.extrasymbols == 0 ) {
06606                     out = NumCopy(number,out);
06607                     out = StrCopy((UBYTE *)"_",out);
06608                 }
06609                 else if ( AC.extrasymbols == 1 ) {
06610                     if ( AC.OutputMode == CMODE ) {
06611                         out = StrCopy((UBYTE *)"[",out);
06612                         out = NumCopy(number,out);
06613                         out = StrCopy((UBYTE *)"]",out);
06614                     }
06615                     else {
06616                         out = StrCopy((UBYTE *)"(",out);
06617                         out = NumCopy(number,out);
06618                         out = StrCopy((UBYTE *)")",out);
06619                     }
06620                 }
06621                 out = StrCopy((UBYTE *) "=",out);
06622                 ss = buffer;
06623                 while ( ss < out ) {
06624                     if ( to >= stopper ) {
06625                         num = to - Out;
06626                         WriteString(wtype,Out,num);
06627                         to = Out;
06628                     }
06629                     *to++ = *ss++;
06630                 }
06631             }
06632             term = cbuf[AM.sbufnum].rhs[number];
06633             first = 1;
06634             if ( *term == 0 ) {
06635                 *to++ = '0';
06636             }
06637             else {
06638                 old1 = AO.OutFill;
06639                 old2 = AO.OutputLine;
06640                 old3 = AO.OutStop;
06641                 AO.OutFill = to;
06642                 AO.OutputLine = Out;
06643                 AO.OutStop = Out + AC.LineLength;
06644                 while ( *term ) {

```

```

06645             if ( WriteInnerTerm(term,first) ) Terminate(-1);
06646             term += *term;
06647             first = 0;
06648         }
06649         to = Out + (AO.OutFill-AO.OutputLine);
06650         AO.OutFill = old1;
06651         AO.OutputLine = old2;
06652         AO.OutStop = old3;
06653     }
06654 }
06655 fstring++;
06656 }
06657 else {
06658     goto IllegControlSequence;
06659 }
06660 }
06661 else if ( *fstring == '+' ) {
06662     plus = 1; goto retry;
06663 }
06664 else if ( *fstring == 0 ) {
06665     *to++ = 0;
06666 }
06667 else {
06668     IllegControlSequence:
06669     MesPrint("@Illegal control sequence in format string in #write instruction");
06670     ReturnWithError:
06671     AM.FileOnlyFlag = h->oldlogonly;
06672     AC.LogHandle = h->oldhandle;
06673     AO.PrintType = h->oldprinttype;
06674     AM.silent = h->oldsilent;
06675     return(-1);
06676 }
06677 }
06678 else {
06679     *to++ = *fstring++;
06680 }
06681 }
06682 /*
06683     Now flush the output
06684 */
06685 num = to - Out;
06686 /*[15apr2004 mt]:*/
06687 if(wtype==EXTERNALCHANNELOUT){
06688     if(num!=0)
06689         WriteUnfinString(wtype,Out,num);
06690 }else
06691 /*:[15apr2004 mt]*/
06692 WriteString(wtype,Out,num);
06693 /*
06694     and restore original parameters
06695 */
06696 AM.FileOnlyFlag = h->oldlogonly;
06697 AC.LogHandle = h->oldhandle;
06698 AO.PrintType = h->oldprinttype;
06699 AM.silent = h->oldsilent;
06700 return(0);
06701 }
06702
06703 /*
06704     #] writeToChannel :
06705     #[ DoFactDollar :
06706
06707     Executes the #factdollar $var
06708     instruction
06709 */
06710
06711 int DoFactDollar(UBYTE *s)
06712 {
06713     GETIDENTITY
06714     WORD numdollar, *oldworkpointer;
06715
06716     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
06717     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
06718     while ( *s == ' ' || *s == '\t' ) s++;
06719     if ( *s == '$' ) {
06720         if ( GetName(AC.dollarnames,s+1,&numdollar,NOAUTO) != CDOLLAR ) {
06721             MesPrint("@%s is undefined",s);
06722             return(-1);
06723         }
06724         s = SkipAName(s+1);
06725         if ( *s != 0 ) {
06726             MesPrint("@#FactDollar should have a single $variable for its argument");
06727             return(-1);
06728         }
06729         NewSort(BHEAD0);
06730         oldworkpointer = AT.WorkPointer;
06731         if ( DollarFactorize(BHEAD numdollar) ) return(-1);

```

```

06732     AT.WorkPointer = oldworkpointer;
06733     LowerSortLevel();
06734     return(0);
06735 }
06736 else if ( ParenthesesTest(s) ) return(-1);
06737 else {
06738     MesPrint("@#FactDollar should have a single $variable for its argument");
06739     return -1;
06740 }
06741 }
06742
06743 /*
06744     #] DoFactDollar :
06745     #[ GetDollarNumber :
06746 */
06747
06748 WORD GetDollarNumber(UBYTE **inp, DOLLARS d)
06749 {
06750     UBYTE *s = *inp, c, *name;
06751     WORD number, nfac, *w;
06752     DOLLARS dd;
06753     s++;
06754     if ( *s == '$' ) {
06755         s++; name = s;
06756         while ( FG.cTable[*s] < 2 ) s++;
06757         c = *s; *s = 0;
06758         if ( GetName(AC.dollarnames,name,&number,NOAUTO) == NAMENOTFOUND ) {
06759             MesPrint("@dollar in #write should have been defined previously");
06760             Terminate(-1);
06761         }
06762         *s = c;
06763         dd = Dollars + number;
06764         if ( c == '[' ) {
06765             *inp = s;
06766             nfac = GetDollarNumber(inp,dd);
06767             s = *inp;
06768             if ( *s != ']' ) {
06769                 MesPrint("@Illegal factor for dollar variable");
06770                 Terminate(-1);
06771             }
06772             *inp = s+1;
06773             if ( nfac == 0 ) {
06774                 if ( dd->nfactors > d->nfactors ) {
06775 TooBig:
06776                     MesPrint("@Factor number for dollar variable too large");
06777                     Terminate(-1);
06778                 }
06779                 return(dd->nfactors);
06780             }
06781             w = dd->factors[nfac-1].where;
06782             if ( w == 0 ) {
06783                 if ( dd->factors[nfac-1].value > d->nfactors ||
06784                     dd->factors[nfac-1].value < 0 ) goto TooBig;
06785                 return(dd->factors[nfac-1].value);
06786             }
06787             if ( *w == 4 && w[4] == 0 && w[3] == 3 && w[2] == 1
06788                 && w[1] <= d->nfactors ) return(w[1]);
06789             if ( w[*w] == 0 && w[*w-1] == *w-1 ) goto TooBig;
06790 IllNum:
06791             MesPrint("@Illegal factor number for dollar variable");
06792             Terminate(-1);
06793         }
06794     } else { /* The dollar should be a number */
06795         if ( dd->type == DOLZERO ) {
06796             return(0);
06797         }
06798         else if ( dd->type == DOLTERMS || dd->type == DOLNUMBER ) {
06799             w = dd->where;
06800             if ( *w == 4 && w[4] == 0 && w[3] == 3 && w[2] == 1
06801                 && w[1] <= d->nfactors ) return(w[1]);
06802             if ( w[*w] == 0 && w[*w-1] == *w-1 ) goto TooBig;
06803             goto IllNum;
06804         }
06805         else goto IllNum;
06806     }
06807 }
06808 else if ( FG.cTable[*s] == 1 ) {
06809     WORD x = *s++ - '0';
06810     while ( FG.cTable[*s] == 1 ) {
06811         x = 10*x + *s++ - '0';
06812         if ( x > d->nfactors ) {
06813             MesPrint("@Factor number %d for dollar variable too large",x);
06814             Terminate(-1);
06815         }
06816     }
06817     if ( *s != ']' ) {
06818         MesPrint("@Illegal factor number for dollar variable");

```



```

06819         Terminate(-1);
06820     }
06821     s++; *inp = s;
06822     return(x);
06823 }
06824 else {
06825     MesPrint("@Illegal factor indicator for dollar variable");
06826     Terminate(-1);
06827 }
06828 return(-1);
06829 }
06830
06831 /*
06832     #] GetDollarNumber :
06833     #[ DoSetRandom :
06834
06835     Executes the #SetRandom number
06836 */
06837
06838 int DoSetRandom(UBYTE *s)
06839 {
06840     ULONG x;
06841     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
06842     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
06843     while ( *s == ' ' || *s == '\t' ) s++;
06844     x = 0;
06845     while ( FG.cTable[*s] == 1 ) {
06846         x = 10*x + (*s++-'0');
06847     }
06848     while ( *s == ' ' || *s == '\t' ) s++;
06849     if ( *s == 0 ) {
06850 #ifdef WITHPTHREADS
06851 #ifdef WITHSORTBOTS
06852         int id, totnum = MaX(2*AM.totalnumberofthreads-3,AM.totalnumberofthreads);
06853 #else
06854         int id, totnum = AM.totalnumberofthreads;
06855 #endif
06856         for ( id = 0; id < totnum; id++ ) {
06857             AB[id]->R.wranfseed = x;
06858             if ( AB[id]->R.wranfia ) M_free(AB[id]->R.wranfia,"wranf");
06859             AB[id]->R.wranfia = 0;
06860         }
06861 #else
06862         AR.wranfseed = x;
06863         if ( AR.wranfia ) M_free(AR.wranfia,"wranf");
06864         AR.wranfia = 0;
06865 #endif
06866         return(0);
06867     }
06868     else {
06869         MesPrint("@proper syntax is #SetRandom number");
06870         return(-1);
06871     }
06872 }
06873
06874 /*
06875     #] DoSetRandom :
06876     #[ DoOptimize :
06877
06878     Executes the #Optimize(expr) instruction.
06879 */
06880
06881 int DoOptimize(UBYTE *s)
06882 {
06883     GETIDENTITY
06884     UBYTE *exprname;
06885     WORD numexpr;
06886     int error = 0, i;
06887     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
06888     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
06889     DUMMYUSE(*s)
06890     exprname = s; s = SkipAName(s);
06891     if ( *s != 0 && *s != ';' ) {
06892         MesPrint("@proper syntax is #Optimize,expression");
06893         return(-1);
06894     }
06895     *s = 0;
06896     if ( GetName(AC.exprnames,exprname,&numexpr,NOAUTO) != CEXPRESSION ) {
06897         MesPrint("@%s is not an expression",exprname);
06898         error = 1;
06899     }
06900     else if ( AP.preError == 0 ) {
06901         EXPRESSIONS e = Expressions + numexpr;
06902         POSITION position;
06903         int firstterm;
06904         WORD *term = AT.WorkPointer;
06905         ClearOptimize();

```

```

06906         if ( AO.OptimizationLevel == 0 ) return(0);
06907         switch ( e->status ) {
06908             case LOCALEXPRESSSION:
06909             case GLOBALEXPRESSSION:
06910                 break;
06911             default:
06912                 MesPrint("@Expression %s is not an active unhidden local or global
expression.",exprname);
06913                 Terminate(-1);
06914                 break;
06915         }
06916 #ifdef WITHMPI
06917         if ( PF.me == MASTER )
06918 #endif
06919             RevertScratch();
06920         for ( i = NumExpressions-1; i >= 0; i-- ) {
06921             AS.OldOnFile[i] = Expressions[i].onfile;
06922             AS.OldNumFactors[i] = Expressions[i].numfactors;
06923             AS.Oldvflags[i] = Expressions[i].vflags;
06924             Expressions[i].vflags &= ~(ISUNMODIFIED|ISZERO);
06925         }
06926         for ( i = 0; i < NumExpressions; i++ ) {
06927             if ( i == numexpr ) {
06928                 PutPreVar(AM.oldnumextrasympols,
06929                     GetPreVar((UBYTE *)"EXTRASYNBOLS_",0),0,1);
06930                 Optimize(numexpr, 0);
06931                 AO.OptimizeResult.nameofexpr = strDup1(exprname,"optimize expression name");
06932                 continue;
06933             }
06934 #ifdef WITHMPI
06935             if ( PF.me == MASTER ) {
06936 #endif
06937                 e = Expressions + i;
06938                 switch ( e->status ) {
06939                     case LOCALEXPRESSSION:
06940                     case SKIPLEXPRESSSION:
06941                     case DROPLEXPRESSSION:
06942                     case DROPEDEXPRESSSION:
06943                     case GLOBALEXPRESSSION:
06944                     case SKIPGEXPRESSSION:
06945                     case DROPGEXPRESSSION:
06946                     case HIDELEXPRESSSION:
06947                     case HIDEGEXPRESSSION:
06948                     case DROPHLEXPRESSSION:
06949                     case DROPHGEXPRESSSION:
06950                     case INTOHIDELEXPRESSSION:
06951                     case INTOHIDEGEXPRESSSION:
06952                         break;
06953                     default:
06954                         continue;
06955                 }
06956                 AR.GetFile = 0;
06957                 SetScratch(AR.infile,&(e->onfile));
06958                 if ( GetTerm(BHEAD term) <= 0 ) {
06959                     MesPrint("@Expression %d has problems reading from scratchfile",i);
06960                     Terminate(-1);
06961                 }
06962                 term[3] = i;
06963                 AR.DeferFlag = 0;
06964                 SeekScratch(AR.outfile,&position);
06965                 e->onfile = position;
06966                 *AM.S0->sBuffer = 0; firstterm = -1;
06967                 do {
06968                     WORD *oldipointer = AR.CompressPointer;
06969                     WORD *comprtop = AR.ComprTop;
06970                     AR.ComprTop = AM.S0->sTop;
06971                     AR.CompressPointer = AM.S0->sBuffer;
06972                     if ( firstterm > 0 ) {
06973                         if ( PutOut(BHEAD term,&position,AR.outfile,1) < 0 ) goto DoSerr;
06974                     }
06975                     else if ( firstterm < 0 ) {
06976                         if ( PutOut(BHEAD term,&position,AR.outfile,0) < 0 ) goto DoSerr;
06977                         firstterm++;
06978                     }
06979                     else {
06980                         if ( PutOut(BHEAD term,&position,AR.outfile,-1) < 0 ) goto DoSerr;
06981                         firstterm++;
06982                     }
06983                     AR.CompressPointer = oldipointer;
06984                     AR.ComprTop = comprtop;
06985                 } while ( GetTerm(BHEAD term) );
06986                 if ( FlushOut(&position,AR.outfile,1) ) {
06987 DoSerr:
06988                     MesPrint("@Expression %d has problems writing to scratchfile",i);
06989                     Terminate(-1);
06990                 }
06991 #ifdef WITHMPI

```

```

06992         }
06993     #endif
06994     }
06995     /*
06996         Now some administration and we are done
06997     */
06998     UpdateMaxSize();
06999     }
07000     else {
07001         ClearOptimize();
07002     }
07003     return(error);
07004 }
07005 }
07006
07007 /*
07008     #] DoOptimize :
07009     #[ DoClearOptimize :
07010
07011     Clears all relevant buffers of the output optimization
07012 */
07013
07014 int DoClearOptimize(UBYTE *s)
07015 {
07016     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07017     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07018     DUMMYUSE(*s);
07019     return(ClearOptimize());
07020 }
07021
07022 /*
07023     #] DoClearOptimize :
07024     #[ DoSkipExtraSymbols :
07025
07026     Adds the intermediate variables of the previous optimization
07027     to the list of extra symbols, provided it has not yet been erased
07028     by a #clearoptimize
07029     To remove them again one needs to use the 'delete extrasymbols;'
07030     or the 'delete extrasymbols>num;' statement in which num is the
07031     old number of extra symbols.
07032 */
07033
07034 int DoSkipExtraSymbols(UBYTE *s)
07035 {
07036     CBUF *C = cbuf + AM.sbufnum;
07037     WORD tt = 0, j = 0, oldval = AO.OptimizeResult.minvar;
07038     if ( AO.OptimizeResult.code == NULL ) return(0);
07039     if ( AO.OptimizationLevel == 0 ) return(0);
07040     while ( *s == ',' ) s++;
07041     if ( *s == 0 ) {
07042         AO.OptimizeResult.minvar = AO.OptimizeResult.maxvar+1;
07043     }
07044     else {
07045         while ( *s <= '9' && *s >= '0' ) j = 10*j + *s++ - '0';
07046         if ( *s ) {
07047             MesPrint("@Illegal use of #SkipExtraSymbols instruction");
07048             Terminate(-1);
07049         }
07050         AO.OptimizeResult.minvar += j;
07051         if ( AO.OptimizeResult.minvar > AO.OptimizeResult.maxvar )
07052             AO.OptimizeResult.minvar = AO.OptimizeResult.maxvar+1;
07053     }
07054     j = AO.OptimizeResult.minvar - oldval;
07055     while ( j > 0 ) {
07056         AddRHS(AM.sbufnum,1);
07057         AddNtoC(AM.sbufnum,1,&tt,16);
07058         AddToCB(C,0)
07059         InsTree(AM.sbufnum,C->numrhs);
07060         j--;
07061     }
07062     return(0);
07063 }
07064
07065 /*
07066     #] DoSkipExtraSymbols :
07067     #[ DoPreReset :
07068
07069     Does a reset of variables.
07070     Currently only the timer (stopwatch) of 'timer_'
07071 */
07072
07073 int DoPreReset(UBYTE *s)
07074 {
07075     UBYTE *ss, c;
07076     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07077     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07078     while ( *s == ' ' || *s == '\t' ) s++;

```

```

07079     if ( *s == 0 ) {
07080         MesPrint("@proper syntax is #Reset variable");
07081         return(-1);
07082     }
07083     ss = s;
07084     while ( FG.cTable[*s] == 0 ) s++;
07085     c = *s; *s = 0;
07086     if ( ( StrICmp(ss, (UBYTE *) "timer") == 0 )
07087         || ( StrICmp(ss, (UBYTE *) "stopwatch") == 0 ) ) {
07088         *s = c;
07089         AP.StopWatchZero = GetRunningTime();
07090         return(0);
07091     }
07092     else {
07093         *s = c;
07094         MesPrint("@proper syntax is #Reset variable");
07095         return(-1);
07096     }
07097 }
07098
07099 /*
07100     #] DoPreReset :
07101     #[ DoPreAppendPath :
07102 */
07103
07104 static int DoAddPath(UBYTE *s, int bPrepend)
07105 {
07106     /* NOTE: this doesn't support some file systems, e.g., 0x5c with CP932. */
07107
07108     UBYTE *path, *path_end, *current_dir, *current_dir_end, *NewPath, *t;
07109     int bRelative, n;
07110
07111     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07112     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07113
07114     /* Parse the path in the input. */
07115     while ( *s == ' ' || *s == '\t' ) s++; /* skip spaces */
07116     if ( *s == '"' ) { /* the path is given by "..." */
07117         path = ++s;
07118         while ( *s && *s != '"' ) {
07119             if ( SEPARATOR != '\\ ' && *s == '\\ ' ) { /* escape character, e.g., "\\\" */
07120                 if ( !s[1] ) goto ImproperPath;
07121                 s++;
07122             }
07123             s++;
07124         }
07125         if ( *s != '"' ) goto ImproperPath;
07126         path_end = s++;
07127     }
07128     else {
07129         path = s;
07130         while ( *s && *s != ' ' && *s != '\t' ) {
07131             if ( SEPARATOR != '\\ ' && *s == '\\ ' ) { /* escape character, e.g., "\" */
07132                 if ( !s[1] ) goto ImproperPath;
07133                 s++;
07134             }
07135             s++;
07136         }
07137         path_end = s;
07138     }
07139     if ( path == path_end ) goto ImproperPath; /* empty path */
07140     while ( *s == ' ' || *s == '\t' ) s++; /* skip spaces */
07141     if ( *s ) goto ImproperPath; /* extra tokens found */
07142
07143     /* Check if the path is an absolute path. */
07144     bRelative = 1;
07145     if ( path[0] == SEPARATOR ) { /* starts with the directory separator */
07146         bRelative = 0;
07147     }
07148     #ifdef WINDOWS
07149     else if ( chartype[path[0]] == 0 && path[1] == ':' ) { /* starts with (drive letter): */
07150         bRelative = 0;
07151     }
07152     #endif
07153
07154     /* Get the current file directory when a relative path is given. */
07155     if ( bRelative ) {
07156         if ( !AC.CurrentStream ) goto FileNameUnavailable;
07157         if ( AC.CurrentStream->type != FILESTREAM && AC.CurrentStream->type != REVERSEFILESTREAM )
07158             goto FileNameUnavailable;
07159         if ( !AC.CurrentStream->name ) goto FileNameUnavailable;
07160         s = current_dir = current_dir_end = AC.CurrentStream->name;
07161         while ( *s ) {
07162             if ( SEPARATOR != '\\ ' && *s == '\\ ' && s[1] ) { /* escape character, e.g., "\\\" */
07163                 s += 2;
07164                 continue;
07165             }

```

```

07165         if ( *s == SEPARATOR ) {
07166             current_dir_end = s;
07167         }
07168         s++;
07169     }
07170 }
07171 else {
07172     current_dir = current_dir_end = NULL;
07173 }
07174
07175 /* Allocate a buffer for new AM.Path. */
07176 n = path_end - path;
07177 if ( AM.Path ) n += StrLen(AM.Path) + 1;
07178 if ( current_dir != current_dir_end ) n+= current_dir_end - current_dir + 1;
07179 s = NewPath = (UBYTE *)Malloc1(n + 1,"add path");
07180
07181 /* Construct new FORM path. */
07182 if ( bPrepend ) {
07183     if ( current_dir != current_dir_end ) {
07184         t = current_dir;
07185         while ( t != current_dir_end ) *s++ = *t++;
07186         *s++ = SEPARATOR;
07187     }
07188     t = path;
07189     while ( t != path_end ) *s++ = *t++;
07190     if ( AM.Path ) *s++ = PATHSEPARATOR;
07191 }
07192 if ( AM.Path ) {
07193     t = AM.Path;
07194     while ( *t ) *s++ = *t++;
07195 }
07196 if ( !bPrepend ) {
07197     if ( AM.Path ) *s++ = PATHSEPARATOR;
07198     if ( current_dir != current_dir_end ) {
07199         t = current_dir;
07200         while ( t != current_dir_end ) *s++ = *t++;
07201         *s++ = SEPARATOR;
07202     }
07203     t = path;
07204     while ( t != path_end ) *s++ = *t++;
07205 }
07206 *s = '\0';
07207
07208 /* Update AM.Path. */
07209 if ( AM.Path ) M_free(AM.Path,"add path");
07210 AM.Path = NewPath;
07211
07212 return(0);
07213
07214 ImproperPath:
07215 MesPrint("@Improper syntax for %%%sPath", bPrepend ? "Prepend" : "Append");
07216 return(-1);
07217
07218 FileNameUnavailable:
07219 /* This may be improved in future. */
07220 MesPrint("@Sorry, %%%sPath can't resolve the current file name from here", bPrepend ? "Prepend" :
"Append");
07221 return(-1);
07222 }
07223
07231 int DoPreAppendPath(UBYTE *s)
07232 {
07233     return DoAddPath(s, 0);
07234 }
07235
07236 /*
07237     #] DoPreAppendPath :
07238     #[ DoPrePrependPath :
07239 */
07240
07248 int DoPrePrependPath(UBYTE *s)
07249 {
07250     return DoAddPath(s, 1);
07251 }
07252
07253 /*
07254     #] DoPrePrependPath :
07255     #[ DoTimeOutAfter :
07256
07257     Executes the #timeoutafter number
07258 */
07259
07260 int DoTimeOutAfter(UBYTE *s)
07261 {
07262     #ifdef WITH_ALARM
07263         ULONG x;
07264     #else

```

```

07265     DUMMYUSE(s);
07266 #endif
07267     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07268     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07269 #ifndef WITH_ALARM
07270     while ( *s == ' ' || *s == '\t' ) s++;
07271     x = 0;
07272     while ( FG.cTable[*s] == 1 ) {
07273         x = 10*x + (*s++-'0');
07274     }
07275     while ( *s == ' ' || *s == '\t' ) s++;
07276     if ( *s == 0 ) {
07277         alarm(x);
07278         return(0);
07279     }
07280     else {
07281         MesPrint("@proper syntax is #TimeoutAfter number");
07282         return(-1);
07283     }
07284 #else
07285     Error0("#timeoutafter not implemented on this computer/system");
07286     return(-1);
07287 #endif
07288 }
07289
07290 /*
07291     #] DoTimeOutAfter :
07292     #[ DoNamespace :
07293
07294     Syntax:
07295         #Namespace name
07296         .....
07297         #use variables
07298         .....
07299         #EndNamespace
07300     Effect:
07301         All variables/expressions defined inside the range of the
07302         namespace get name_ prepended.
07303         This holds also for $-variables, names of procedures and
07304         names of files.
07305     Namespaces can be used in a nested way. cf this_is_deep_x
07306     A leading _ takes the role of what is super:: in some other languages.
07307     Remarks:
07308         Names of preprocessor variables are excluded!
07309         Names of built in objects are excluded! (like sum_, d_ etc.)
07310 */
07311
07312 int DoNamespace(UBYTE *s)
07313 {
07314     UBYTE *s1, *s2, c;
07315     NAMESPACE *namespace;
07316     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07317     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07318     while ( *s == ' ' || *s == '\t' ) s++;
07319     if ( FG.cTable[*s] != 0 ) {
07320         MesPrint("@Illegal name in #namespace instruction: %s",s);
07321         return(-1);
07322     }
07323     s1 = s;
07324     while ( FG.cTable[*s1] <= 1 ) s1++;
07325     s2 = s1;
07326     while ( *s2 == ' ' || *s2 == ',' || *s2 == '\t' ) s2++;
07327     if ( *s2 != 0 ) {
07328         MesPrint("@A #namespace instruction can only have one name with only alphanumeric
07329         characters.");
07330         return(-1);
07331     }
07332     c = *s1; *s1 = 0;
07333     /*
07334     Now we have the name and the statement is legal.
07335     We can proceed creating the namespace and its use tree.
07336     */
07337     namespace = (NAMESPACE *)Malloca(sizeof(NAMESPACE),"namespace");
07338     namespace->name = strdup(s,"namespace_name");
07339     namespace->usenames = MakeNameTree();
07340     if ( AP.firstnamespace == 0 ) {
07341         namespace->previous = 0;
07342         namespace->next = 0;
07343         AP.firstnamespace = namespace;
07344         AP.lastnamespace = namespace;
07345     }
07346     else {
07347         AP.lastnamespace->next = namespace;
07348         namespace->next = 0;
07349         namespace->previous = AP.lastnamespace;
07350         AP.lastnamespace = namespace;
07351     }

```

```

07351     *s1 = c;
07352     return(0);
07353 }
07354
07355 /*
07356     #] DoNamespace :
07357     #[ DoEndNamespace :
07358 */
07359
07360 int DoEndNamespace(UBYTE *s)
07361 {
07362     NAMESPACE *namespace;
07363     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07364     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07365     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
07366     if ( *s != 0 ) {
07367         MesPrint("@Illegal #endnamespace instruction");
07368         return(-1);
07369     }
07370     namespace = AP.lastnamespace;
07371     AP.lastnamespace = namespace->previous;
07372     M_free(namespace->name, "namespace_name");
07373     FreeNameTree(namespace->usenames);
07374     M_free(namespace, "namespace");
07375     return(0);
07376 }
07377
07378 /*
07379     #] DoEndNamespace :
07380     #[ SkipName :
07381 */
07382
07383 UBYTE *SkipName(UBYTE *s)
07384 {
07385     UBYTE *t = s, *s1, c;
07386     int num = 0, block = 0;
07387     if ( *s == '[' ) {
07388         straight:
07389         SKIPBRAL(s)
07390         if ( *s == 0 ) {
07391             MesPrint("&Illegal name: '%s'",t);
07392             return(0);
07393         }
07394         s++; s1 = s;
07395         while ( FG.cTable[*s] <= 1 || *s == '_' ) s++;
07396         if ( s1 != s ) goto witherror;
07397     }
07398     else if ( *s == '$' ) {
07399         s++;
07400         while ( *s == '_' ) { s++; num++; }
07401         block = 1;
07402         while ( FG.cTable[*s] <= 1 || *s == '_' ) {
07403             if ( FG.cTable[*s] != 0 && block == 1 ) {
07404                 blocked:
07405                 MesPrint("&Illegally formed name: %s",t);
07406                 return(0);
07407             }
07408             if ( *s == '_' ) { num++; block = 1; }
07409             else block = 0;
07410             s++;
07411         }
07412         if ( s[-1] == '_' && num > 1 ) goto built;
07413     }
07414     else if ( FG.cTable[*s] == 0 ) {
07415         regular:
07416         while ( FG.cTable[*s] <= 1 || *s == '_' ) {
07417             if ( FG.cTable[*s] != 0 && block == 1 ) goto blocked;
07418             if ( *s == '_' ) { block = 1; num++; }
07419             else block = 0;
07420             s++;
07421         }
07422         if ( *s == '[' ) goto straight;
07423         if ( s[-1] == '_' && num > 1 ) {
07424             built:
07425             c = *s; *s = 0;
07426             MesPrint("&Built in objects cannot be part of namespaces: %s",t);
07427             *s = c;
07428             return(0);
07429         }
07430     }
07431     else if ( *s == '_' ) {
07432         while ( *s == '_' ) { s++; num++; }
07433         if ( FG.cTable[*s] == 0 ) { block = 0; goto regular; }
07434         goto witherror;
07435     }
07436     else if ( *s == '@' ) {
07437         s++; block = 1;

```

```

07438         if ( *s == '_' || FG.cTable[*s] == 1 ) {
07439             MesPrint("@Illegally formed name: %s",s-1);
07440         }
07441         goto regular;
07442     }
07443     else if ( *s == '#' ) { /* name of a procedure */
07444         s++;
07445         while ( *s == '_' ) { s++; num++; }
07446         block = 1;
07447         while ( FG.cTable[*s] <= 1 || *s == '_' ) {
07448             if ( FG.cTable[*s] != 0 && block == 1 ) goto blocked;
07449             if ( *s == '_' ) { num++; block = 1; }
07450             else block = 0;
07451             s++;
07452         }
07453         if ( s[-1] == '_' ) {
07454 witherror:
07455             c = *s; *s = 0;
07456             MesPrint("&Illegally formed name: %s",t);
07457             *s = c;
07458             return(0);
07459         }
07460     }
07461     else if ( *s == '<' ) { /* name of a file. Can be anything (more or less) */
07462         s++;
07463         while ( *s && *s != '>' ) s++;
07464         if ( *s != '>' ) goto witherror;
07465         s++;
07466     }
07467     return(s);
07468 }
07469
07470 /*
07471     #] SkipName :
07472     #[ ConstructName :
07473
07474     Routine gets a 'raw' name and modifies it if the namespace
07475     settings ask for it. It puts the new name in a buffer that
07476     may be expanded if the names become rather long.
07477     Note that eventually that name needs to be copied, because
07478     we do not allocate new buffers for each name.
07479
07480     type tells what kind of name we look for
07481 */
07482
07483 UBYTE *ConstructName(UBYTE *s,UBYTE type)
07484 {
07485     int len;
07486     UBYTE *t, *u;
07487     WORD number;
07488     NAMESPACE *namespace;
07489     if ( AP.lastnamespace == 0 ) return(s);
07490     if ( *s == '@' ) return(s+1);
07491     if ( GetName(AP.lastnamespace->usenames,s,&number,NOAUTO) !=
07492         NAMENOTFOUND ) return(s);
07493 /*
07494     Now the real stuff
07495     First we have to compute the size of the new name.
07496 */
07497     len = StrLen(s) + 1;
07498     namespace = AP.firstnamespace;
07499     while ( namespace ) {
07500         len += StrLen(namespace->name)+1;
07501         namespace = namespace->previous;
07502     }
07503     if ( len > AP.fullnamesize ) {
07504         while ( len > AP.fullnamesize ) AP.fullnamesize *= 2;
07505         M_free(AP.fullname,"AP.fullname");
07506         AP.fullname = (UBYTE *)Malloc1(AP.fullnamesize*sizeof(UBYTE *),"AP.fullname");
07507     }
07508     namespace = AP.firstnamespace;
07509     t = AP.fullname;
07510     switch ( type ) {
07511         case ' ':
07512             case 0:
07513                 while ( namespace ) {
07514                     u = namespace->name;
07515                     while ( *u ) *t++ = *u++;
07516                     *t++ = '_';
07517                     namespace = namespace->previous;
07518                 }
07519                 while ( *s ) *t++ = *s++;
07520                 *t = 0;
07521                 break;
07522         case '$':
07523         case '#':
07524             *t++ = type;

```



```

07525         while ( namespace ) {
07526             u = namespace->name;
07527             while ( *u ) *t++ = *u++;
07528             *t++ = '_';
07529             namespace = namespace->previous;
07530         }
07531         if ( type == '$' ) s++;
07532         while ( *s ) *t++ = *s++;
07533         *t = 0;
07534         break;
07535     case '<':
07536         while ( namespace ) {
07537             u = namespace->name;
07538             while ( *u ) *t++ = *u++;
07539             *t++ = '_';
07540             namespace = namespace->previous;
07541         }
07542         s++;
07543         while ( *s ) *t++ = *s++;
07544         t--; /* strip the '>' */
07545         *t = 0;
07546         break;
07547     default:
07548         MesPrint("&Unrecognized datatype in ConstructName");
07549         *t = 0;
07550         break;
07551 }
07552 return(AP.fullname);
07553 }
07554
07555 /*
07556     #] ConstructName :
07557     #[ DoUse :
07558
07559     Routine makes (inside the confines of the current namespace)
07560     a list of variables that are excluded from the namespace.
07561     Once the namespace is ended, the list is removed.
07562     The list can include names of variables, dollars and procedures.
07563     Preprocessor variables are excluded from the namespace. Their
07564     inclusion would be too complicated for the input streams.
07565     Note that the preprocessor variables that are arguments in a #do
07566     or in a procedure are on a stack and should not cause problems.
07567     Names of variables can be just that.
07568     Names of $-variables are also straightforward.
07569     Names of procedures should be preceded by a # character.
07570     Names of files (like in #include) should be enclosed by <>.
07571     The names are stored in a balanced tree. Each namespace may have
07572     its own tree. The toplevel (no namespace) does not allow a #use.
07573 */
07574
07575 int DoUse(UBYTE *s)
07576 {
07577     NAMESPACE *namespace;
07578     UBYTE *t, c;
07579     int number;
07580     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07581     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07582     if ( AP.lastnamespace == 0 ) {
07583         MesPrint("@It is not allowed to use #use outside the scope of a namespace.");
07584         return(-1);
07585     }
07586     namespace = AP.lastnamespace;
07587     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
07588     while ( *s ) {
07589         t = s;
07590         if ( ( s = SkipName(t) ) == 0 ) return(-1);
07591         if ( s == t ) {
07592             MesPrint("@Unrecognized object in #use instruction: %s",t);
07593             return(-1);
07594         }
07595         c = *s; *s = 0;
07596     }
07597     /*
07598     In usenames we only need the names to know whether they are 'protected'.
07599     We need to keep the $, # and <> to avoid potential double names.
07600 */
07601     AddName(namespace->usenames,t,0,0,&number);
07602     *s = c;
07603     while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
07604 }
07605 return(0);
07606 }
07607
07608 #] DoUse :
07609 #[ UserFlags :
07610
07611 Syntax:

```

```

07612         #ClearFlag number(s),expression(s)
07613         #ClearFlag number(s)
07614         #ClearFlag expression(s)
07615         #ClearFlag
07616         #SetFlag number(s),expression(s)
07617         #SetFlag number(s)
07618         #SetFlag expression(s)
07619         #SetFlag
07620         par == 0: Clear, par == 1: Set.
07621 */
07622
07623 int UserFlags(UBYTE *s,int par)
07624 {
07625     int mask = 0, error = 0, i;
07626     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07627     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07628     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07629     if ( *s == 0 ) { /* Treat all flags in all active expressions */
07630         allexpr:
07631         for ( i = 0; i < NumExpressions; i++ ) {
07632             switch ( Expressions[i].status ) {
07633                 case UNHIDELEXPRESSION:
07634                 case UNHIDEGEXPRESSION:
07635                 case INTOHIDELEXPRESSION:
07636                 case INTOHIDEGEXPRESSION:
07637                 case LOCALEXPRESSION:
07638                 case GLOBALEXPRESSION:
07639                 case SKIPLEXPRESSION:
07640                 case SKIPGEXPRESSION:
07641                 case HIDELEXPRESSION:
07642                 case HIDEGEXPRESSION:
07643                     if ( par == 1 ) Expressions[i].uflags |= ~mask;
07644                     else Expressions[i].uflags &= mask;
07645                     break;
07646                 case DROPEDEXPRESSION:
07647                 case DROPLEXPRESSION:
07648                 case DROPGEXPRESSION:
07649                 case DROPHLEXPRESSION:
07650                 case DROPHGEXPRESSION:
07651                 case STOREDEXPRESSION:
07652                 case HIDDENLEXPRESSION:
07653                 case HIDDENGEXPRESSION:
07654                 case SPECTATOREXPRESSION:
07655                 default:
07656                     break;
07657             }
07658         }
07659     }
07660     else if ( FG.cTable[*s] == 1 ) {
07661         mask = (int)WORDMASK;
07662         while ( FG.cTable[*s] == 1 ) {
07663             int x = 0;
07664             while ( FG.cTable[*s] == 1 ) { x = 10*x + (*s++-'0'); }
07665             if ( x < 1 || x > BITSINWORD ) {
07666                 MesPrint("@Illegal number %d for flag in #...Flag instruction",x);
07667                 return(1);
07668             }
07669             mask ^= (1<<(x-1));
07670             while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07671         }
07672         if ( *s == 0 ) goto allexpr;
07673     }
07674     else { /* Clear all flags in all expressions that are specified */
07675         mask = (int)WORDMASK;
07676     }
07677     while ( *s ) { /* now read the expressions */
07678         UBYTE *s1, c;
07679         WORD num1;
07680         if ( FG.cTable[*s] != 0 && *s != '[' ) goto syntax;
07681         s1 = s; s = SkipAName(s);
07682         c = *s; *s = 0;
07683         if ( GetName(AC.exprnames,s1,&num1,NOAUTO) != CEXPRESSION ) {
07684             MesPrint("@%s is not an active expression",s1);
07685             error = 1;
07686             return(error);
07687         }
07688         switch ( Expressions[num1].status ) {
07689             case UNHIDELEXPRESSION:
07690             case UNHIDEGEXPRESSION:
07691             case INTOHIDELEXPRESSION:
07692             case INTOHIDEGEXPRESSION:
07693             case LOCALEXPRESSION:
07694             case GLOBALEXPRESSION:
07695             case SKIPLEXPRESSION:
07696             case SKIPGEXPRESSION:
07697             case HIDELEXPRESSION:
07698             case HIDEGEXPRESSION:

```

```

07699         if ( par == 1 ) Expressions[numl].uflags |= ~mask;
07700         else             Expressions[numl].uflags &= mask;
07701         break;
07702     case DROPEDEXPRESSION:
07703     case DROPEXPRESSION:
07704     case DROPGEXPRESSION:
07705     case DROPHLEXPRESSION:
07706     case DROPHGEXPRESSION:
07707     case STOREDEXPRESSION:
07708     case HIDDENLEXPRESSION:
07709     case HIDDENGEXPRESSION:
07710     case SPECTATOREXPRESSION:
07711     default:
07712         MesPrint("@%s is not an active expression",s1);
07713         error = 1;
07714         break;
07715     }
07716     *s = c;
07717     while ( *s == ',' || *s == ' ' || *s == '\\t' ) s++;
07718 }
07719 return(error);
07720 syntax:
07721 MesPrint("@Illegal name in #...Flag instruction.");
07722 return(1);
07723 }
07724
07725 /*
07726     #] UserFlags :
07727     #[ DoClearUserFlag :
07728 */
07729
07730 int DoClearUserFlag(UBYTE *s)
07731 {
07732     return(UserFlags(s,0));
07733 }
07734
07735 /*
07736     #] DoClearUserFlag :
07737     #[ DoSetUserFlag :
07738 */
07739
07740 int DoSetUserFlag(UBYTE *s)
07741 {
07742     return(UserFlags(s,1));
07743 }
07744
07745 /*
07746     #] DoSetUserFlag :
07747     #[ DoStartFloat :
07748
07749     If there is a number follwing, it will be the new default precision.
07750     If float has been started before, the old one will be removed first.
07751     If there are two numbers, the second one is the maximum weight for
07752     MZV's.
07753 */
07754 #ifdef WITHFLOAT
07755
07756 int DoStartFloat(UBYTE *s)
07757 {
07758     GETIDENTITY
07759     int error = 0;
07760     LONG x;
07761     UBYTE *ss;
07762     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07763     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07764     if ( AR.PolyFun != 0 ) {
07765         MesPrint("@Simultaneous use of Poly(Rat)Fun and float_ is not allowed.");
07766         error = 1;
07767     }
07768     if ( AC.ncmod != 0 ) {
07769         MesPrint("@Simultaneous use of floating point and modulus arithmetic makes no sense.");
07770         error = 1;
07771     }
07772     if ( AT.aux_ ) { // First, we clean up any previous floating point system.
07773         ClearfFloat();
07774         ClearMZVTables();
07775     }
07776     while ( *s == ',' || *s == ' ' || *s == '\\t' ) s++;
07777 /*
07778     The first parameter is the float precision
07779 */
07780     ss = s;
07781     if ( *s >= '0' && *s <= '9' ) {
07782         x = 0;
07783         do {
07784             x = 10*x + (*s++-'0');
07785         } while ( *s >= '0' && *s <= '9' );

```

```

07786 /*
07787     The precision can either be in digits or bits.
07788     AC.DefaultPrecision is always in bits.
07789 */
07790     if ( tolower(*s) == 'd' ) { AC.tDefaultPrecision = (LONG)ceil(x*log2(10.0)); s++; }
07791     else if ( tolower(*s) == 'b' ) { AC.tDefaultPrecision = x; s++; }
07792     else goto IllPar;
07793     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07794 /*
07795     The second parameter is either absent, which implies zero MZV weight,
07796     or of the form MZV = <weight>
07797 */
07798     if ( tolower(*s) == 'm' && tolower(s[1]) == 'z' && tolower(s[2]) == 'v' ) {
07799         s+=3;
07800         while ( *s == ' ' || *s == '\t' ) s++;
07801         if ( *s != '=' ) goto IllPar;
07802         s++;
07803         while ( *s == ' ' || *s == '\t' ) s++;
07804         if ( *s >= '0' && *s <= '9' ) {
07805             x = 0;
07806             do {
07807                 x = 10*x + (*s++ - '0');
07808             } while ( *s >= '0' && *s <= '9' );
07809             AC.tMaxWeight = x;
07810             while ( *s == ' ' || *s == '\t' ) s++;
07811         }
07812         else goto IllPar;
07813     }
07814     else {
07815         AC.tMaxWeight = 0;
07816     }
07817     if ( *s ) goto IllPar;
07818 }
07819 else if ( *s != 0 ) {
07820 IllPar:
07821     MesPrint("@Illegal parameter in %#StartFloat: %s ",ss);
07822     error = 1;
07823 }
07824 if ( error == 0 ) {
07825     if ( AC.tDefaultPrecision && ( AC.tDefaultPrecision != AC.DefaultPrecision
07826     || AT.aux_ == 0 ) ) {
07827         AC.DefaultPrecision = AC.tDefaultPrecision;
07828         AC.tDefaultPrecision = 0;
07829     }
07830     if ( AC.tMaxWeight && ( AC.tMaxWeight != AC.MaxWeight
07831     || AT.aux_ == 0 ) ) {
07832         AC.MaxWeight = AC.tMaxWeight;
07833         AC.tMaxWeight = 0;
07834     }
07835     SetFloatPrecision(AC.DefaultPrecision+AC.MaxWeight+1);
07836     SetupMPFTables();
07837     if ( AC.MaxWeight > 0 ) SetupMZVTables();
07838     SetfFloatPrecision(AC.DefaultPrecision);
07839 }
07840 else {
07841     AC.tDefaultPrecision = 0;
07842     AC.tMaxWeight = 0;
07843 }
07844 return(error);
07845 }
07846
07847 #endif
07848 /*
07849     #] DoStartFloat :
07850     #[ DoEndFloat :
07851 */
07852 #ifdef WITHFLOAT
07853
07854 int DoEndFloat(UBYTE *s)
07855 {
07856     int error = 0;
07857     if ( AP.PreSwitchModes[AP.PreSwitchLevel] != EXECUTINGPRESWITCH ) return(0);
07858     if ( AP.PreIfStack[AP.PreIfLevel] != EXECUTINGIF ) return(0);
07859     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
07860     if ( *s != 0 ) {
07861         MesPrint("@Illegal parameter in %#EndFloat instruction: %s ",s);
07862         error = 1;
07863     }
07864     if ( error == 0 ) {
07865         ClearfFloat();
07866         ClearMZVTables();
07867     }
07868     return(error);
07869 }
07870
07871 #endif
07872 /*

```

```


07873         #] DoEndFloat :
07874         # ] PreProcessor :
07875     */

```

4.117 proces.c File Reference

```
#include "form3.h"
```

Include dependency graph for proces.c:

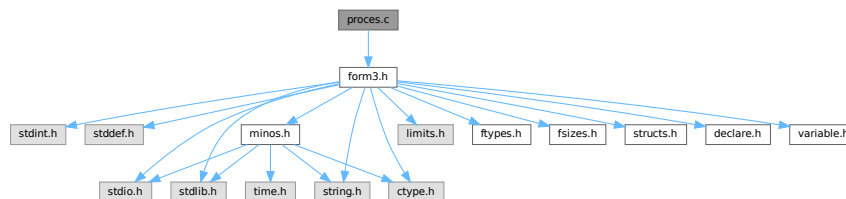

Macros

- `#define DONE(x) { retvalue = x; goto Done; }`

Functions

- `int Processor (void)`
- `WORD TestSub (PHEAD WORD *term, WORD level)`
- `int InFunction (PHEAD WORD *term, WORD *termout)`
- `int InsertTerm (PHEAD WORD *term, WORD replac, WORD extractbuff, WORD *position, WORD *termout, WORD tepos)`
- `LONG PasteFile (PHEAD WORD number, WORD *accum, POSITION *position, WORD **accfill, RENUMBER renumber, WORD *freeze, WORD nexpr)`
- `WORD * PasteTerm (PHEAD WORD number, WORD *accum, WORD *position, WORD times, WORD divby)`
- `int FiniTerm (PHEAD WORD *term, WORD *accum, WORD *termout, WORD number, WORD tepos)`
- `int Generator (PHEAD WORD *term, WORD level)`
- `int DoOnePow (PHEAD WORD *term, WORD power, WORD nexp, WORD *accum, WORD *aa, WORD level, WORD *freeze)`
- `int Deferred (PHEAD WORD *term, WORD level)`
- `int PrepPoly (PHEAD WORD *term, WORD par)`
- `int PolyFunMul (PHEAD WORD *term)`

Variables

- `WORD printscratch [2]`

4.117.1 Detailed Description

Contains the central terms processor routines. This is the core of the virtual machine. All other files are to help these routines.

Definition in file [proces.c](#).

4.117.2 Macro Definition Documentation

4.117.2.1 DONE

```
#define DONE(
    x ) { retvalue = x; goto Done; }
```

TestSub hunts for subexpression pointers. If one is found its power is given in AN.TeSuOut. and the returnvalue is 'expressionnumber'. If the expression number is negative it is an expression on disk.

In addition this routine tries to locate subexpression pointers in functions. It also notices that action must be taken with any of the special functions.

Parameters

<i>term</i>	The term in which TestSub hunts for potential action
<i>level</i>	The number of the 'level' in the compiler buffer.

Returns

The number of the (sub)expression that was encountered.

Other values that are returned are in AN.TeSuOut, AR.TePos, AT.TMbuff, AN.TelFun, AN.Frozen, AT.TMaddr

The level in the compiler buffer is more or less the number of the statement in the module. Hence it refers to the element in the lhs array.

This routine is one of the most important routines in FORM.

Definition at line [683](#) of file [proces.c](#).

4.117.3 Function Documentation

4.117.3.1 Processor()

```
int Processor (
    void )
```

This is the central processor. It accepts a stream of Expressions which is accessed by calls to GetTerm. The expressions reside either in AR.infile or AR.hidefile The definitions of an expression are seen as an id-statement, so the primary Expressions should be written to the system of scratch files as single terms with an expression pointer. Each expression is terminated with a zero and the whole is terminated by two zeroes.

The routine DoExecute should determine whether results are to be printed, should revert the scratch I/O directions etc. In principle it is DoExecute that calls Processor.


Returns

if everything OK: 0. Otherwise error. The preprocessor may continue with compilation though. Really fatal errors should return on the spot by calling `Terminate`.

Definition at line 64 of file [proces.c](#).

References [CbUf::Buffer](#), [EndSort\(\)](#), [FlushOut\(\)](#), [Generator\(\)](#), [CbUf::lhs](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [PF_BroadcastRHS\(\)](#), [PF_InParallelProcessor\(\)](#), [PF_Processor\(\)](#), [CbUf::Pointer](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [PutOut\(\)](#), [CbUf::rhs](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

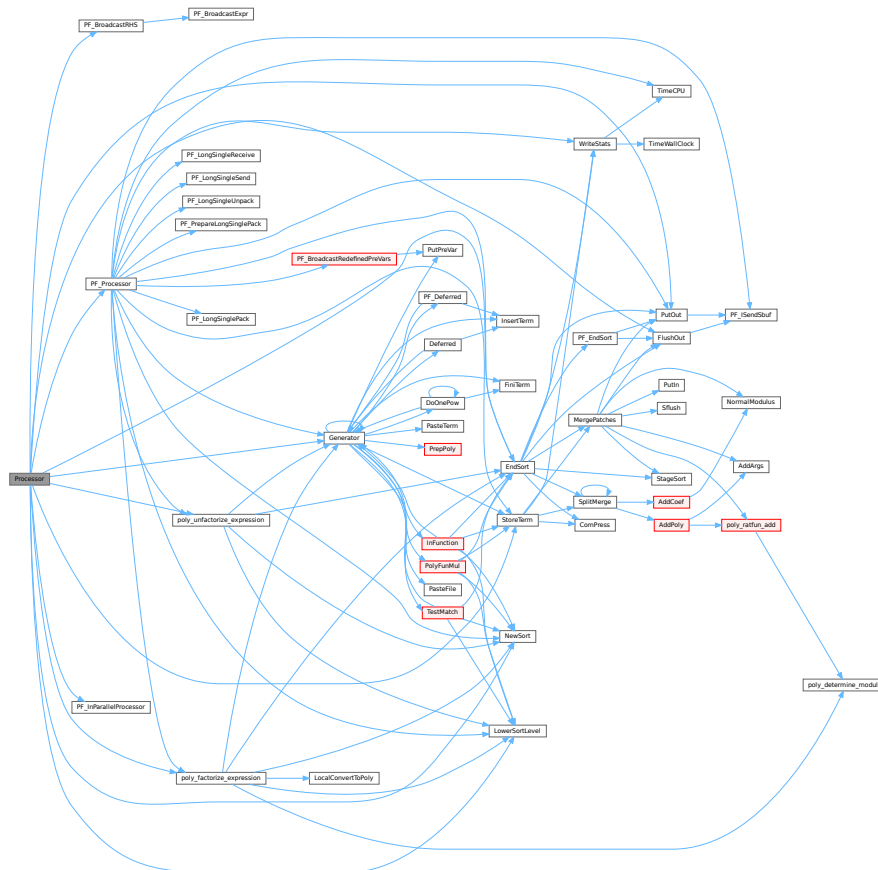

4.117.3.2 TestSub()

```
WORD TestSub (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 685 of file [proces.c](#).

4.117.3.3 InFunction()

```
int InFunction (
    PHEAD WORD * term,
    WORD * termout )
```

Makes the replacement of the subexpression with the number 'replac' in a function argument. Additional information is passed in some of the AR, AN, AT variables.

Parameters

<i>term</i>	The input term
<i>termout</i>	The output term

Returns

0: everything is fine, Negative: fatal, Positive: error.


Special attention should be given to nested functions!

Definition at line 2175 of file [proces.c](#).

References [Compare1\(\)](#), [CompareSymbols\(\)](#), [EndSort\(\)](#), [Generator\(\)](#), [LowerSortLevel\(\)](#), [NewSort\(\)](#), [StoreTerm\(\)](#), and [SymbolNormalize\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

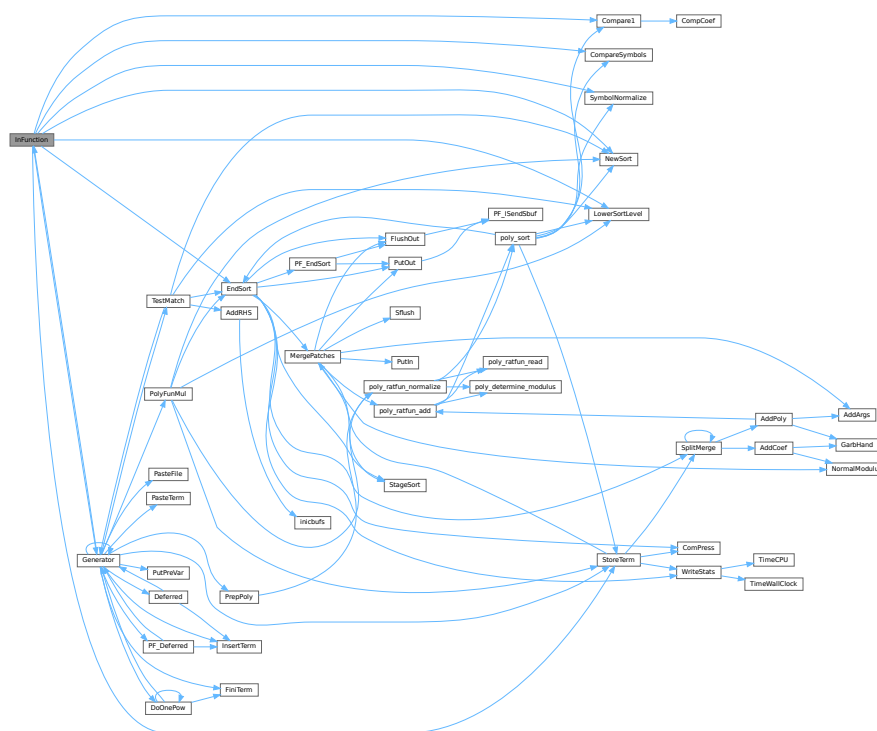

4.117.3.4 InsertTerm()

```

int InsertTerm (
    PHEAD WORD * term,
    WORD replac,
    WORD extractbuff,
    WORD * position,

```



```
WORD * termout,  
WORD tepos )
```

Puts the terms 'term' and 'position' together into a single legal term in termout. replac is the number of the subexpression that should be replaced. It must be a positive term. When action is needed in the argument of a function all terms in that argument are dealt with recursively. The subexpression is sorted. Only one subexpression is done at a time this way.

Parameters

<i>term</i>	the input term
<i>replac</i>	number of the subexpression pointer to replace
<i>extractbuff</i>	number of the compiler buffer <i>replac</i> refers to
<i>position</i>	position from where to take the term in the compiler buffer
<i>termout</i>	the output term
<i>tepos</i>	offset in term where the subexpression is.

Returns

Normal conventions (OK = 0).

Definition at line 2745 of file [proces.c](#).

Referenced by [Deferred\(\)](#), [Generator\(\)](#), and [PF_Deferred\(\)](#).

4.117.3.5 PasteFile()

```

LONG PasteFile (
    PHEAD WORD number,
    WORD * accum,
    POSITION * position,
    WORD ** accfill,
    RENUMBER renumber,
    WORD * freeze,
    WORD nexpr )

```

Gets a term from stored expression *expr* and puts it in the accumulator at position *number*. It returns the length of the term that came from file.

Parameters

<i>number</i>	number of partial terms to skip in <i>accum</i>
<i>accum</i>	the accumulator
<i>position</i>	file position from where to get the stored term
<i>accfill</i>	returns tail position in <i>accum</i>
<i>renumber</i>	the renumber struct for the variables in the stored expression
<i>freeze</i>	information about if we need only the contents of a bracket
<i>nexpr</i>	the number of the stored expression

Returns

Normal conventions (OK = 0).

Definition at line 2881 of file [proces.c](#).

Referenced by [Generator\(\)](#).

4.117.3.6 PasteTerm()

```
WORD * PasteTerm (
    PHEAD WORD number,
    WORD * accum,
    WORD * position,
    WORD times,
    WORD divby )
```

Puts the term at position in the accumulator *accum* at position '*number*+1'. if *times* > 0 the coefficient of this term is multiplied by *times*/*divby*.

Parameters

<i>number</i>	The number of term fragments in <i>accum</i> that should be skipped
<i>accum</i>	The accumulator of term fragments
<i>position</i>	A position in (typically) a compiler buffer from where a (piece of a) term comes.
<i>times</i>	Multiply the result by this
<i>divby</i>	Divide the result by this.

This routine is typically used when we have to replace a (sub)expression pointer by a power of a (sub)expression. This uses mostly a binomial expansion and the new term is the old term multiplied one by one by terms of the new expression. The factors *times* and *divby* keep track of the binomial coefficient. Once this is complete, the routine *FiniTerm* will make the contents of the accumulator into a proper term that still needs to be normalized.

Definition at line 3003 of file [proces.c](#).

Referenced by [Generator\(\)](#).

4.117.3.7 FiniTerm()

```
int FiniTerm (
    PHEAD WORD * term,
    WORD * accum,
    WORD * termout,
    WORD number,
    WORD tepos )
```

Concatenates the contents of the accumulator into a single legal term, which replaces the subexpression pointer

Parameters

<i>term</i>	the input term with the (sub)expression subterm
<i>accum</i>	the accumulator with the term fragments
<i>termout</i>	the location where the output should be written
<i>number</i>	the number of term fragments in the accumulator
<i>tepos</i>	the position of the subterm in <i>term</i> to be replaced

Definition at line 3068 of file [proces.c](#).

Referenced by [DoOnePow\(\)](#), and [Generator\(\)](#).

4.117.3.8 Generator()

```
int Generator (
    PHEAD WORD * term,
    WORD level )
```

The heart of the program. Here the expansion tree is set up in one giant recursion

Parameters

<i>term</i>	the input term. may be overwritten
<i>level</i>	the level in the compiler buffer (number of statement)

Returns

Normal conventions (OK = 0).


The routine looks first whether there are unsubstituted (sub)expressions. If so, one of them gets inserted term by term and the new term is used in a renewed call to Generator. If there are no (sub)expressions, the term is normalized, the compiler level is raised (next statement) and the program looks what type of statement this is. If this is a special statement it is either treated on the spot or the appropriate routine is called. If it is a substitution, the pattern matcher is called (TestMatch) which tells whether there was a match. If so we need to call TestSub again to test for (sub)expressions. If we run out of levels, the term receives a final treatment for modulus calculus and/or brackets and is then sent off to the sorting routines.

Definition at line 3267 of file [proces.c](#).

References [Deferred\(\)](#), [DoOnePow\(\)](#), [FiniTerm\(\)](#), [Generator\(\)](#), [InFunction\(\)](#), [InsertTerm\(\)](#), [CbUf::lhs](#), [VaRrEnUm::lo](#), [PasteFile\(\)](#), [PasteTerm\(\)](#), [PF_Deferred\(\)](#), [CbUf::Pointer](#), [PolyFunMul\(\)](#), [PrepPoly\(\)](#), [PutPreVar\(\)](#), [CbUf::rhs](#), [StoreTerm\(\)](#), [ReNuMbEr::symb](#), and [TestMatch\(\)](#).

Referenced by [Deferred\(\)](#), [DoOnePow\(\)](#), [generate_expression\(\)](#), [Generator\(\)](#), [InFunction\(\)](#), [MakeDollarInteger\(\)](#), [MakeDollarMod\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Deferred\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_unfactorize_expression\(\)](#), [Processor\(\)](#), and [TestMatch\(\)](#).

Here is the call graph for this function:

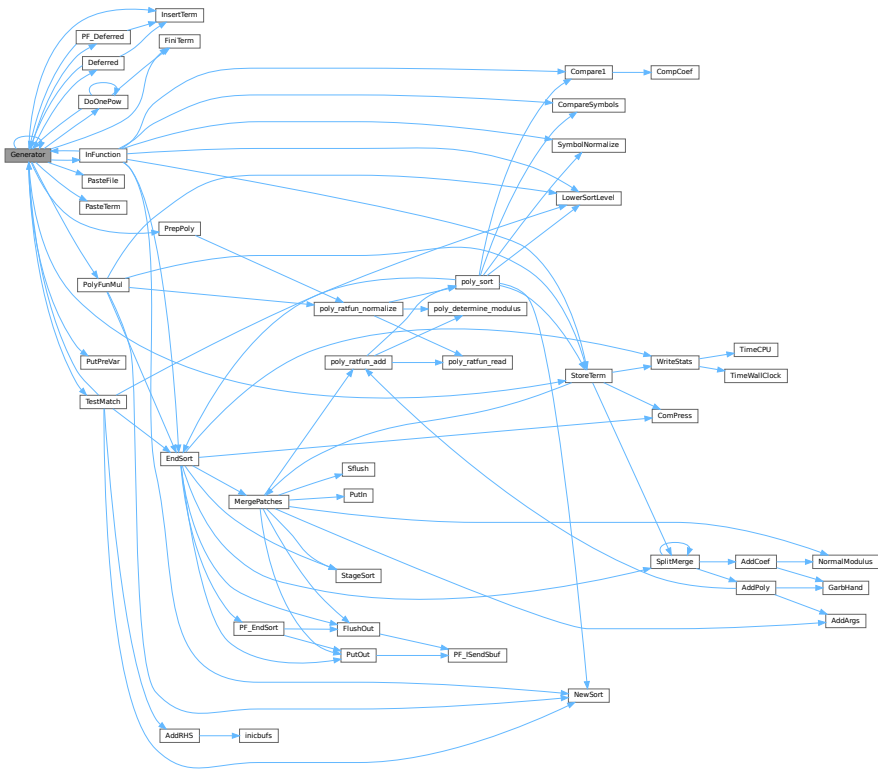

4.117.3.9 DoOnePow()

```
int DoOnePow (
    PHEAD WORD * term,
    WORD power,
    WORD nexp,
    WORD * accum,
    WORD * aa,
    WORD level,
    WORD * freeze )
```

Routine gets one power of an expression in the scratch system. If there are more powers needed there will be a recursion.

No attempt is made to use binomials because we have no information about commuting properties.

There is a searching for the contents of brackets if needed. This searching may be rather slow because of the single links.

Parameters

<i>term</i>	is the term we are adding to.
<i>power</i>	is the power of the expression that we need.
<i>nexp</i>	is the number of the expression.
<i>accum</i>	is the accumulator of terms. It accepts the termfragments that are made into a proper term in FiniTerm

Parameters


<i>aa</i>	points to the start of the entire accumulator. In *aa we store the number of term fragments that are in the accumulator.
<i>level</i>	is the current depth in the tree of statements. It is needed to continue to the next operation/substitution with each generated term
<i>freeze</i>	is the pointer to the bracket information that should be matched.

Definition at line 4637 of file [proces.c](#).

References [DoOnePow\(\)](#), [FiniTerm\(\)](#), [Generator\(\)](#), and [FiLe::handle](#).

Referenced by [DoOnePow\(\)](#), and [Generator\(\)](#).

Here is the call graph for this function:

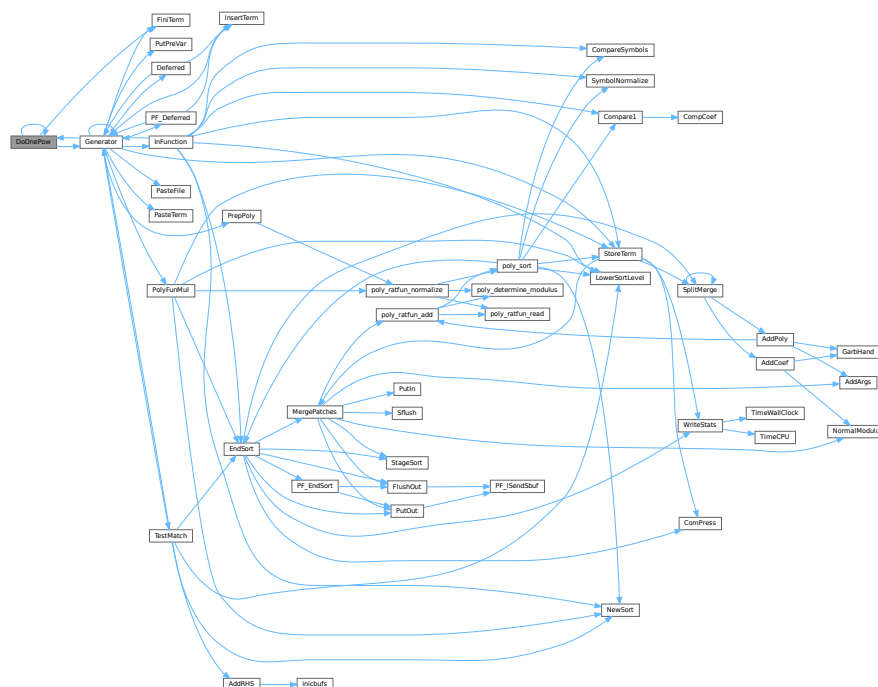

4.117.3.10 Deferred()

```
int Deferred (
    PHEAD WORD * term,
    WORD level )
```

Picks up the deferred brackets. These are the bracket contents of which we postpone the reading when we use the 'Keep Brackets' statement. These contents are multiplying the terms just before they are sent to the sorting system. Special attention goes to having it thread-safe We have to lock positioning the file and reading it in a thread specific buffer.

Parameters


<i>term</i>	The term that must be multiplied by the contents of the current bracket
<i>level</i>	The compiler level. This is needed because after multiplying term by term we call Generator again.

Definition at line 4858 of file [proces.c](#).

References [Generator\(\)](#), and [InsertTerm\(\)](#).

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

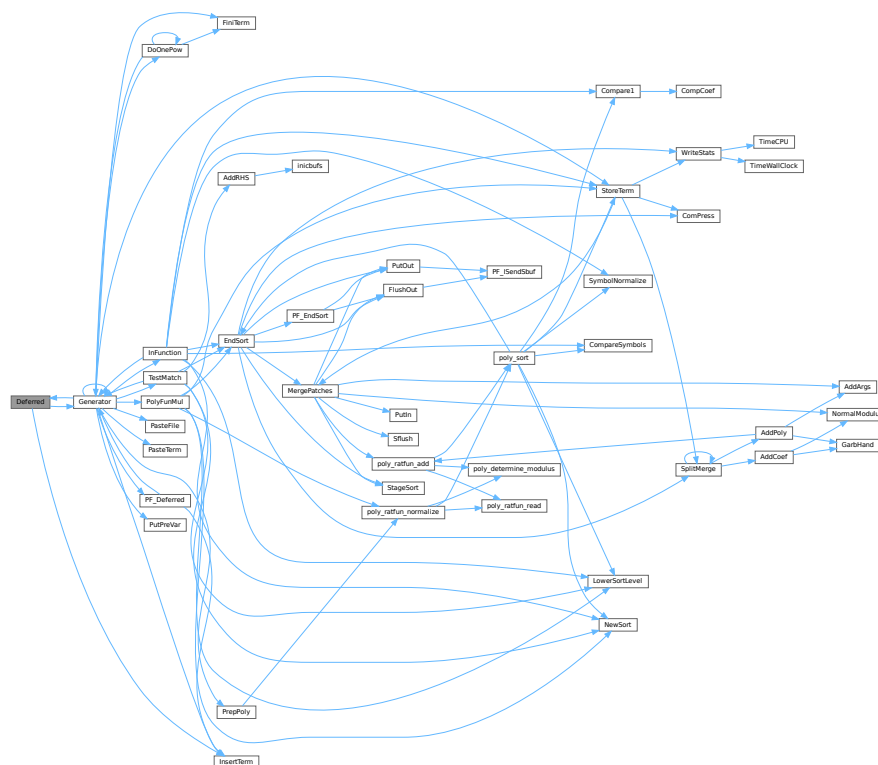

4.117.3.11 PrepPoly()

```

int PrepPoly (
    PHEAD WORD * term,
    WORD par )

```

Routine checks whether the count of function AR.PolyFun is zero or one. If it is one and it has one scalarlike argument the coefficient of the term is pulled inside the argument. If the count is zero a new function is made with the coefficient as its only argument. The function should be placed at its proper position.

When this function is active it places the PolyFun as last object before the coefficient. This is needed because otherwise the compress algorithm has problems in MergePatches.

The bracket routine should also place the PolyFun at a comparable spot. The compression should then stop at the PolyFun. It doesn't really have to stop when writing the final result but this may be too complicated.


The parameter `par` tells whether we are at groundlevel or inside a function or dollar variable.

Definition at line 4986 of file `proces.c`.

References `poly_ratfun_normalize()`.

Referenced by `Generator()`.

Here is the call graph for this function:

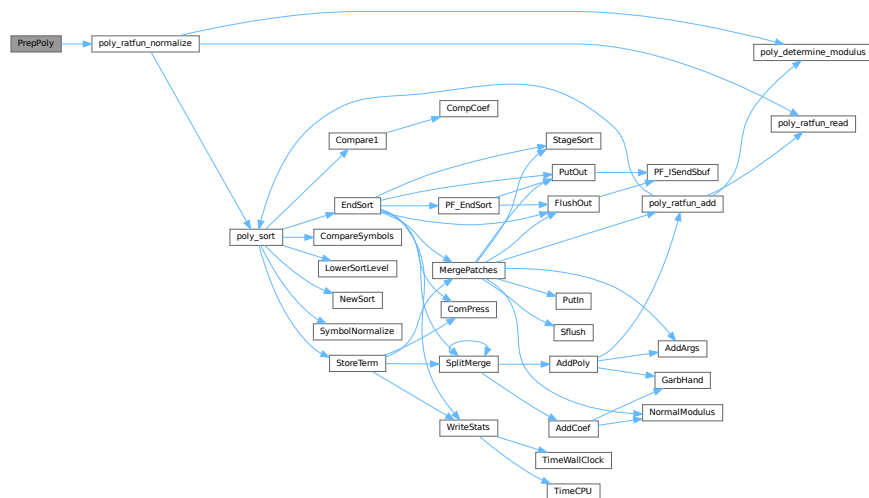

4.117.3.12 PolyFunMul()

```
int PolyFunMul (
    PHEAD WORD * term )
```

Multiplies the arguments of multiple occurrences of the polyfun. In this routine we do the original PolyFun with one argument only. The PolyRatFun (PolyFunType = 2) is done in a dedicated routine in the file `polywrap.cc`. The new result is written over the old result.

Parameters

<code>term</code>	It contains the input term and later the output.
-------------------	--

Returns


Normal conventions (OK = 0).

Definition at line 5374 of file `proces.c`.

References `EndSort()`, `LowerSortLevel()`, `NewSort()`, `poly_ratfun_normalize()`, and `StoreTerm()`.

Referenced by [Generator\(\)](#).

Here is the call graph for this function:

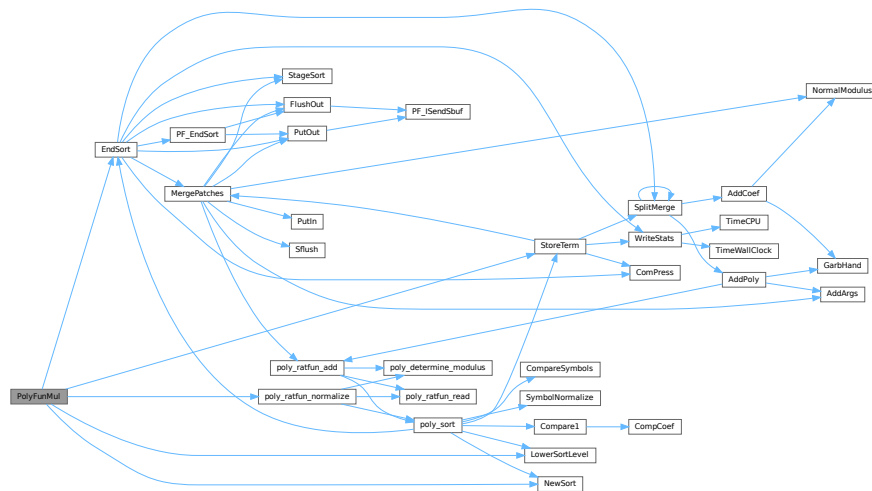

4.117.4 Variable Documentation

4.117.4.1 printscratch

WORD printscratch[2]

Definition at line 39 of file [proces.c](#).

4.118 proces.c

[Go to the documentation of this file.](#)

```

00001
00006 /* #[ License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #] License : */
00032 /*
00033 #define HIDEDEBUG

```

```

00034     # [ Includes : proces.c
00035 */
00036
00037 #include "form3.h"
00038
00039 WORD printscratch[2];
00040
00041 /*
00042     #] Includes :
00043     # [ Processor :
00044         # [ Processor :          WORD Processor()
00045 */
00064 int Processor(void)
00065 {
00066     GETIDENTITY
00067     WORD *term, *t, i, size;
00068     int retval = 0;
00069     EXPRESSIONS e;
00070     POSITION position;
00071     WORD last, LastExpression, fromspectator;
00072     LONG dd = 0;
00073     CBUF *C = cbuf+AC.cbunum;
00074     int firstterm;
00075     CBUF *CC = cbuf+AT.ebunum;
00076     WORD **w, *cpo, *cbo;
00077     FILEHANDLE *curfile, *oldoutfile = AR.outfile;
00078     WORD oldBracketOn = AR.BracketOn;
00079     WORD *oldBrackBuf = AT.BrackBuf;
00080     WORD oldbracketindexflag = AT.bracketindexflag;
00081 #ifdef WITHPTHREADS
00082     int OldMultiThreaded = AS.MultiThreaded, Oldmparallelflag = AC.mparallelflag;
00083 #endif
00084     if ( CC->numrhs > 0 || CC->numlhs > 0 ) {
00085         if ( CC->rhs ) {
00086             w = CC->rhs; i = CC->numrhs;
00087             do { *w++ = 0; } while ( --i > 0 );
00088         }
00089         if ( CC->lhs ) {
00090             w = CC->lhs; i = CC->numlhs;
00091             do { *w++ = 0; } while ( --i > 0 );
00092         }
00093         CC->numlhs = CC->numrhs = 0;
00094         ClearTree(AT.ebunum);
00095         CC->Pointer = CC->Buffer;
00096     }
00097
00098     if ( NumExpressions == 0 ) return(0);
00099     AR.expflags = 0;
00100     AR.CompressPointer = AR.CompressBuffer;
00101     AR.NoCompress = AC.NoCompress;
00102     term = AT.WorkPointer;
00103     if ( ( (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer) ) > AT.WorkTop ) return(MesWork());
00104     UpdatePositions();
00105     C->rhs[C->numrhs+1] = C->Pointer;
00106     AR.KeptInHold = 0;
00107     if ( AC.CollectFun ) AR.DeferFlag = 0;
00108     AR.outtohide = 0;
00109     AN.PolyFunTodo = 0;
00110 #ifdef HIIDEBUG
00111     MesPrint("Status at the start of Processor (HideLevel = %d)",AC.HideLevel);
00112     for ( i = 0; i < NumExpressions; i++ ) {
00113         e = Expressions+i;
00114         ExprStatus(e);
00115     }
00116 #endif
00117 /*
00118     Next determine the last expression. This is used for removing the
00119     input file when the final stage of the sort of this expression is
00120     reached. That can save up to 1/3 in disk space.
00121 */
00122     for ( i = NumExpressions-1; i >= 0; i-- ) {
00123         e = Expressions+i;
00124         if ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION
00125             || e->status == HIDELEXPRESSION || e->status == HIDEGEXPRESSION
00126             || e->status == SKIPLEXPRESSION || e->status == SKIPGEXPRESSION
00127             || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEXPRESSION
00128             || e->status == INTOHIDELEXPRESSION || e->status == INTOHIDEGEXPRESSION
00129         ) break;
00130     }
00131     last = i;
00132     for ( i = NumExpressions-1; i >= 0; i-- ) {
00133         AS.OldOnFile[i] = Expressions[i].onfile;
00134         AS.OldNumFactors[i] = Expressions[i].numfactors;
00135         /* AS.Oldvflags[i] = e[i].vflags; */
00136         AS.Oldvflags[i] = Expressions[i].vflags;
00137         AS.Olduflags[i] = Expressions[i].uflags;
00138         Expressions[i].vflags &= ~(ISUNMODIFIED|ISZERO);

```

```

00139     }
00140 #ifndef WITHPTHREADS
00141 /*
00142     When we run with threads we have to make sure that all local input
00143     buffers are pointed correctly. Of course this isn't needed if we
00144     run on a single thread only.
00145 */
00146     if ( AC.partodoflag && AM.totalnumberofthreads > 1 ) {
00147         AS.MultiThreaded = 1; AC.mparallelflag = PARALLELFLAG;
00148     }
00149     if ( AS.MultiThreaded && AC.mparallelflag == PARALLELFLAG ) {
00150         SetWorkerFiles();
00151     }
00152 /*
00153     We start with running the expressions with expr->partodo in parallel.
00154     The current model is: give each worker an expression. Wait for
00155     workers to finish and tell them where to write.
00156     Then give them a new expression. Workers may have to wait for each
00157     other. This is also the case with the last one.
00158 */
00159     if ( AS.MultiThreaded && AC.mparallelflag == PARALLELFLAG ) {
00160         if ( InParallelProcessor() ) {
00161             retval = 1;
00162         }
00163         AS.MultiThreaded = OldMultiThreaded;
00164         AC.mparallelflag = Oldmparallelflag;
00165     }
00166 #endif
00167 #ifdef WITHMPI
00168     if ( AC.RhsExprInModuleFlag && PF.rhsInParallel && (AC.mparallelflag == PARALLELFLAG ||
00169 AC.partodoflag) ) {
00170         if ( PF_BroadcastRHS() ) {
00171             retval = -1;
00172         }
00173     }
00174     PF.exprtodo = -1; /* This means, the slave does not perform inparallel */
00175     if ( AC.partodoflag > 0 ) {
00176         if ( PF_InParallelProcessor() ) {
00177             retval = -1;
00178         }
00179     }
00180 #endif
00181     for ( i = 0; i < NumExpressions; i++ ) {
00182 #ifdef INNERTEST
00183         if ( AC.InnerTest ) {
00184             if ( StrCmp(AC.TestValue,(BYTE *)INNERTEST) == 0 ) {
00185                 MesPrint("Testing(Processor): value = %s",AC.TestValue);
00186             }
00187 #endif
00188         e = Expressions+i;
00189 #ifdef WITHPTHREADS
00190         if ( AC.partodoflag > 0 && e->partodo > 0 && AM.totalnumberofthreads > 2 ) {
00191             e->partodo = 0;
00192             continue;
00193         }
00194 #endif
00195 #ifdef WITHMPI
00196         if ( AC.partodoflag > 0 && e->partodo > 0 && PF.numtasks > 2 ) {
00197             e->partodo = 0;
00198             continue;
00199         }
00200 #endif
00201         AS.CollectOverFlag = 0;
00202         AR.exchanged = 0;
00203         if ( i == last ) LastExpression = 1;
00204         else LastExpression = 0;
00205         if ( e->inmem ) {
00206 /*
00207             #! in memory : Memory allocated by poly.c only thusfar.
00208             Here GetTerm cannot work.
00209             For the moment we ignore this for parallelization.
00210 */
00211             WORD j;
00212
00213             AR.GetFile = 0;
00214             SetScratch(AR.infile,&(e->onfile));
00215             if ( GetTerm(BHEAD term) <= 0 ) {
00216                 MesPrint("(1) Expression %d has problems in scratchfile",i);
00217                 retval = -1;
00218                 break;
00219             }
00220             term[3] = i;
00221             AR.CurExpr = i;
00222             SeekScratch(AR.outfile,&position);
00223             e->onfile = position;
00224             if ( PutOut (BHEAD term,&position,AR.outfile,0) < 0 ) goto ProcErr;

```

```

00225     AR.DeferFlag = AC.ComDefer;
00226     NewSort(BHEAD0);
00227     AN.ninterms = 0;
00228     t = e->inmem;
00229     while ( *t ) {
00230         for ( j = 0; j < *t; j++ ) term[j] = t[j];
00231         t += *t;
00232         AN.ninterms++; dd = AN.deferskipped;
00233         if ( AC.CollectFun && *term <= (AM.MaxTer/(2*(LONG)(sizeof(WORD)))) ) {
00234             if ( GetMoreFromMem(term,&t) ) {
00235                 LowerSortLevel(); goto ProcErr;
00236             }
00237         }
00238         AT.WorkPointer = term + *term;
00239         AN.RepPoint = AT.RepCount + 1;
00240         AN.IndDum = AM.IndDum;
00241         AR.CurDum = ReNumber(BHEAD term);
00242         if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMFLAG);
00243         if ( AN.ncmod ) {
00244             if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
00245             else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
00246         }
00247         else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
00248         if ( Generator(BHEAD term,0) ) {
00249             LowerSortLevel(); goto ProcErr;
00250         }
00251         AN.ninterms += dd;
00252     }
00253     AN.ninterms += dd;
00254     if ( EndSort(BHEAD AM.S0->sBuffer,0) < 0 ) goto ProcErr;
00255     if ( AM.S0->TermsLeft ) e->vflags &= ~ISZERO;
00256     else e->vflags |= ISZERO;
00257     if ( AR.expchanged == 0 ) e->vflags |= ISUNMODIFIED;
00258     if ( AM.S0->TermsLeft ) AR.expflags |= ISZERO;
00259     if ( AR.expchanged ) AR.expflags |= ISUNMODIFIED;
00260     AR.GetFile = 0;
00261     /*
00262         #] in memory :
00263     */
00264     }
00265     else {
00266         AR.CurExpr = i;
00267         switch ( e->status ) {
00268             case UNHIDELEXPRESSION:
00269             case UNHIDEGEXPRESSION:
00270                 AR.GetFile = 2;
00271             #ifdef WITHMPI
00272                 if ( PF.me == MASTER ) SetScratch(AR.hidefile,&(e->onfile));
00273             #else
00274                 SetScratch(AR.hidefile,&(e->onfile));
00275                 AR.InHiBuf = AR.hidefile->POfull-AR.hidefile->POfill;
00276             #ifdef HIIDEDEBUG
00277                 MesPrint("Hidefile: onfile: %15p, POposition: %15p, filesize: %15p",&(e->onfile)
00278                     ,&(AR.hidefile->POposition),&(AR.hidefile->filesize));
00279                 MesPrint("Set hidefile to buffer position %1/%1; AR.InHiBuf = %1"
00280                     ,(AR.hidefile->POfill-AR.hidefile->PObuffer)*sizeof(WORD)
00281                     ,(AR.hidefile->POfull-AR.hidefile->PObuffer)*sizeof(WORD)
00282                     ,AR.InHiBuf
00283                 );
00284             #endif
00285             #endif
00286                 curfile = AR.hidefile;
00287                 goto commonread;
00288             case INTOHIDELEXPRESSION:
00289             case INTOHIDEGEXPRESSION:
00290                 AR.outtohide = 1;
00291             /*
00292                 BugFix 12-feb-2016
00293                 This may not work when the file is open and we move around.
00294                 AR.hidefile->POfill = AR.hidefile->POfull;
00295             */
00296                 SetEndHScratch(AR.hidefile,&position);
00297                 /* fall through */
00298             case LOCALEXPRESSION:
00299             case GLOBALEXPRESSION:
00300                 AR.GetFile = 0;
00301             /*[20oct2009 mt]:*/
00302             #ifdef WITHMPI
00303                 if ( ( PF.me == MASTER ) || (PF.mkSlaveInfile) )
00304             #endif
00305                 SetScratch(AR.infile,&(e->onfile));
00306             /*:[20oct2009 mt]*/
00307                 curfile = AR.infile;
00308             commonread:;
00309             #ifdef WITHMPI
00310                 if ( PF_Processor(e,i,LastExpression) ) {
00311                     MesPrint("Error in PF_Processor");

```

```

00312             goto ProcErr;
00313         }
00314         /*[20oct2009 mt]:*/
00315         if ( AC.mparallelflag != PARALLELFLAG ){
00316             if (PF.me != MASTER)
00317                 break;
00318         #endif
00319         /*[20oct2009 mt]:*/
00320         if ( GetTerm(BHEAD term) <= 0 ) {
00321             #ifdef HIDEDEBUG
00322                 MesPrint("Error condition 1a");
00323                 ExprStatus(e);
00324             #endif
00325             MesPrint("(2) Expression %d has problems in scratchfile(process)",i);
00326             retval = -1;
00327             break;
00328         }
00329         term[3] = i;
00330         if ( term[5] < 0 ) { /* Fill with spectator */
00331             fromspectator = -term[5];
00332             PUTZERO (AM.SpectatorFiles[fromspectator-1].readpos);
00333             term[5] = AC.cbufnum;
00334         }
00335         else fromspectator = 0;
00336         if ( AR.outtohide ) {
00337             SeekScratch(AR.hidefile,&position);
00338             e->onfile = position;
00339             if ( PutOut (BHEAD term,&position,AR.hidefile,0) < 0 ) goto ProcErr;
00340         }
00341         else {
00342             SeekScratch(AR.outfile,&position);
00343             e->onfile = position;
00344             if ( PutOut (BHEAD term,&position,AR.outfile,0) < 0 ) goto ProcErr;
00345         }
00346         AR.DeferFlag = AC.ComDefer;
00347         AR.Eside = RHSIDE;
00348         if ( ( e->vflags & ISFACTORIZED ) != 0 ) {
00349             AR.BracketOn = 1;
00350             AT.BrackBuf = AM.BracketFactors;
00351             AT.bracketindexflag = 1;
00352         }
00353         if ( AT.bracketindexflag > 0 ) OpenBracketIndex(i);
00354         #ifdef WITHPTHREADS
00355         if ( AS.MultiThreaded && AC.mparallelflag == PARALLELFLAG ) {
00356             if ( ThreadsProcessor(e,LastExpression,fromspectator) ) {
00357                 MesPrint("Error in ThreadsProcessor");
00358                 goto ProcErr;
00359             }
00360             if ( AR.outtohide ) {
00361                 AR.outfile = oldoutfile;
00362                 AR.hidefile->POfull = AR.hidefile->POfill;
00363             }
00364         }
00365         else
00366         #endif
00367         {
00368             NewSort (BHEAD0);
00369             AR.MaxDum = AM.IndDum;
00370             AN.ninterms = 0;
00371             for(;;) {
00372                 if ( fromspectator ) size = GetFromSpectator(term,fromspectator-1);
00373                 else size = GetTerm(BHEAD term);
00374                 if ( size <= 0 ) break;
00375                 SeekScratch(curfile,&position);
00376                 if ( ( e->vflags & ISFACTORIZED ) != 0 && term[1] == HAAKJE ) {
00377                     StoreTerm(BHEAD term);
00378                 }
00379                 else {
00380                     AN.ninterms++; dd = AN.deferskipped;
00381                     if ( AC.CollectFun && *term <= (AM.MaxTer/(2*(LONG)(sizeof(WORD)))) ) {
00382                         if ( GetMoreTerms(term) < 0 ) {
00383                             LowerSortLevel(); goto ProcErr;
00384                         }
00385                         SeekScratch(curfile,&position);
00386                     }
00387                     AT.WorkPointer = term + *term;
00388                     AN.RepPoint = AT.RepCount + 1;
00389                     if ( AR.DeferFlag ) {
00390                         AN.IndDum = Expressions[AR.CurExpr].numdummies + AM.IndDum;
00391                         AR.CurDum = AN.IndDum;
00392                     }
00393                     else {
00394                         AN.IndDum = AM.IndDum;
00395                         AR.CurDum = ReNumber (BHEAD term);
00396                     }
00397                     if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMLAG);
00398                     if ( AN.ncmod ) {

```

```

00399         if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
00400     else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
00401     }
00402     else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
00403     if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
00404         && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
00405         PolyFunClean(BHEAD term);
00406     }
00407     if ( Generator(BHEAD term,0) ) {
00408         LowerSortLevel(); goto ProcErr;
00409     }
00410     AN.ninterms += dd;
00411 }
00412 SetScratch(curfile,&position);
00413 if ( AR.GetFile == 2 ) {
00414     AR.InHiBuf = (curfile->POfull-curfile->PObuffer)
00415         -DIFBASE(position,curfile->POposition)/sizeof(WORD);
00416 }
00417 else {
00418     AR.InInBuf = (curfile->POfull-curfile->PObuffer)
00419         -DIFBASE(position,curfile->POposition)/sizeof(WORD);
00420 }
00421 }
00422 AN.ninterms += dd;
00423 if ( LastExpression ) {
00424     UpdateMaxSize();
00425     if ( AR.infile->handle >= 0 ) {
00426         CloseFile(AR.infile->handle);
00427         AR.infile->handle = -1;
00428         remove(AR.infile->name);
00429         PUTZERO(AR.infile->POposition);
00430     }
00431     AR.infile->POfill = AR.infile->POfull = AR.infile->PObuffer;
00432 }
00433 if ( AR.outtohide ) AR.outfile = AR.hidefile;
00434 if ( EndSort(BHEAD AM.S0->sBuffer,0) < 0 ) goto ProcErr;
00435 if ( AR.outtohide ) {
00436     AR.outfile = oldoutfile;
00437     AR.hidefile->POfull = AR.hidefile->POfill;
00438 }
00439 e->numdummies = AR.MaxDum - AM.IndDum;
00440 UpdateMaxSize();
00441 }
00442 AR.BracketOn = oldBracketOn;
00443 AT.BrackBuf = oldBrackBuf;
00444 if ( ( e->vflags & TOBEFACTORED ) != 0 ) {
00445     poly_factorize_expression(e);
00446 }
00447 else if ( ( ( e->vflags & TOBEUNFACTORED ) != 0 )
00448         && ( ( e->vflags & ISFACTORIZED ) != 0 ) ) {
00449     poly_unfactorize_expression(e);
00450 }
00451 AT.bracketindexflag = oldbracketindexflag;
00452 if ( AM.S0->TermsLeft ) e->vflags &= ~ISZERO;
00453 else e->vflags |= ISZERO;
00454 if ( AR.expchanged == 0 ) e->vflags |= ISUNMODIFIED;
00455 if ( AM.S0->TermsLeft ) AR.expflags |= ISZERO;
00456 if ( AR.expchanged ) AR.expflags |= ISUNMODIFIED;
00457 AR.GetFile = 0;
00458 AR.outtohide = 0;
00459 /*[20oct2009 mt]:*/
00460 #ifdef WITHMPI
00461     }
00462 #endif
00463 #ifdef WITHPTHREADS
00464     if ( e->status == INTOHIDELEXPRESSION ||
00465         e->status == INTOHIDEGEXPRESSION ) {
00466         SetHideFiles();
00467     }
00468 #endif
00469     break;
00470 case SKIPLEXPRESSION:
00471 case SKIPGEXPRESSSION:
00472     /*
00473         This can be greatly improved of course by file-to-file copy.
00474     */
00475     #ifdef WITHMPI
00476         if ( PF.me != MASTER ) break;
00477     #endif
00478     AR.GetFile = 0;
00479     SetScratch(AR.infile,&(e->onfile));
00480     if ( GetTerm(BHEAD term) <= 0 ) {
00481     #ifdef HIDEDEBUG
00482         MesPrint("Error condition 1b");
00483         ExprStatus(e);
00484     #endif
00485         MesPrint("(3) Expression %d has problems in scratchfile",i);

```

```

00486         retval = -1;
00487         break;
00488     }
00489     term[3] = i;
00490     AR.DeferFlag = 0;
00491     SeekScratch(AR.outfile,&position);
00492     e->onfile = position;
00493     *AM.S0->sBuffer = 0; firstterm = -1;
00494     do {
00495         WORD *oldipointer = AR.CompressPointer;
00496         WORD *comprtop = AR.ComprTop;
00497         AR.ComprTop = AM.S0->sTop;
00498         AR.CompressPointer = AM.S0->sBuffer;
00499         if ( firstterm > 0 ) {
00500             if ( PutOut(BHEAD term,&position,AR.outfile,1) < 0 ) goto ProcErr;
00501         }
00502         else if ( firstterm < 0 ) {
00503             if ( PutOut(BHEAD term,&position,AR.outfile,0) < 0 ) goto ProcErr;
00504             firstterm++;
00505         }
00506         else {
00507             if ( PutOut(BHEAD term,&position,AR.outfile,-1) < 0 ) goto ProcErr;
00508             firstterm++;
00509         }
00510         AR.CompressPointer = oldipointer;
00511         AR.ComprTop = comprtop;
00512     } while ( GetTerm(BHEAD term) );
00513     if ( FlushOut(&position,AR.outfile,1) ) goto ProcErr;
00514     UpdateMaxSize();
00515     break;
00516     case HIDELEXPRESSION:
00517     case HIDEGEXPRESSION:
00518 #ifdef WITHMPI
00519         if ( PF.me != MASTER ) break;
00520 #endif
00521     AR.GetFile = 0;
00522     SetScratch(AR.infile,&(e->onfile));
00523     if ( GetTerm(BHEAD term) <= 0 ) {
00524 #ifdef HIDEDEBUG
00525         MesPrint("Error condition 1c");
00526         ExprStatus(e);
00527 #endif
00528         MesPrint("(4) Expression %d has problems in scratchfile",i);
00529         retval = -1;
00530         break;
00531     }
00532     term[3] = i;
00533     AR.DeferFlag = 0;
00534     SetEndHScratch(AR.hidefile,&position);
00535     e->onfile = position;
00536 #ifdef HIDEDEBUG
00537     if ( AR.hidefile->handle >= 0 ) {
00538         POSITION possize,pos;
00539         PUTZERO(possize);
00540         PUTZERO(pos);
00541         SeekFile(AR.hidefile->handle,&pos,SEEK_CUR);
00542         SeekFile(AR.hidefile->handle,&possize,SEEK_END);
00543         SeekFile(AR.hidefile->handle,&pos,SEEK_SET);
00544         MesPrint("Processor Hidel: filesize(th) = %12p, filesize(ex) = %12p",&(position),
00545                 &(possize));
00546         MesPrint("      in buffer:
00547 %1", (AR.hidefile->POfill-AR.hidefile->PObuffer)*sizeof(WORD));
00548     }
00549 #endif
00550     *AM.S0->sBuffer = 0; firstterm = -1;
00551     cbo = cpo = AM.S0->sBuffer;
00552     do {
00553         WORD *oldipointer = AR.CompressPointer;
00554         WORD *oldibuffer = AR.CompressBuffer;
00555         WORD *comprtop = AR.ComprTop;
00556         AR.ComprTop = AM.S0->sTop;
00557         AR.CompressPointer = cpo;
00558         AR.CompressBuffer = cbo;
00559         if ( firstterm > 0 ) {
00560             if ( PutOut(BHEAD term,&position,AR.hidefile,1) < 0 ) goto ProcErr;
00561         }
00562         else if ( firstterm < 0 ) {
00563             if ( PutOut(BHEAD term,&position,AR.hidefile,0) < 0 ) goto ProcErr;
00564             firstterm++;
00565         }
00566         else {
00567             if ( PutOut(BHEAD term,&position,AR.hidefile,-1) < 0 ) goto ProcErr;
00568             firstterm++;
00569         }
00570         cpo = AR.CompressPointer;
00571         cbo = AR.CompressBuffer;
00572         AR.CompressPointer = oldipointer;

```

```

00572         AR.CompressBuffer = oldibuffer;
00573         AR.ComprTop = comprtop;
00574     } while ( GetTerm(BHEAD term) );
00575 #ifdef HIIDEDEBUG
00576     if ( AR.hidefile->handle >= 0 ) {
00577         POSITION posize,pos;
00578         PUTZERO(posize);
00579         PUTZERO(pos);
00580         SeekFile(AR.hidefile->handle,&pos,SEEK_CUR);
00581         SeekFile(AR.hidefile->handle,&posize,SEEK_END);
00582         SeekFile(AR.hidefile->handle,&pos,SEEK_SET);
00583         MesPrint("Processor Hide2: filesize(th) = %12p, filesize(ex) = %12p",&(position),
00584                 &(posize));
00585         MesPrint("    in buffer:
%1", (AR.hidefile->POfill-AR.hidefile->PObuffer)*sizeof(WORD));
00586     }
00587 #endif
00588     if ( FlushOut(&position,AR.hidefile,1) ) goto ProcErr;
00589     AR.hidefile->POfull = AR.hidefile->POfill;
00590 #ifdef HIIDEDEBUG
00591     if ( AR.hidefile->handle >= 0 ) {
00592         POSITION posize,pos;
00593         PUTZERO(posize);
00594         PUTZERO(pos);
00595         SeekFile(AR.hidefile->handle,&pos,SEEK_CUR);
00596         SeekFile(AR.hidefile->handle,&posize,SEEK_END);
00597         SeekFile(AR.hidefile->handle,&pos,SEEK_SET);
00598         MesPrint("Processor Hide3: filesize(th) = %12p, filesize(ex) = %12p",&(position),
00599                 &(posize));
00600         MesPrint("    in buffer:
%1", (AR.hidefile->POfill-AR.hidefile->PObuffer)*sizeof(WORD));
00601     }
00602 #endif
00603 /*
00604     Because we direct the e->onfile already to the hide file, we
00605     need to change the status of the expression. Otherwise the use
00606     of parts (or the whole) of the expression looks in the infile
00607     while the position is that of the hide file.
00608     We choose to get everything from the hide file. On average that
00609     should give least file activity.
00610 */
00611     if ( e->status == HIDELEXPRESSION ) {
00612         e->status = HIDDENLEXPRESSION;
00613         AS.OldOnFile[i] = e->onfile;
00614         AS.OldNumFactors[i] = Expressions[i].numfactors;
00615     }
00616     if ( e->status == HIDEGEXPRESSION ) {
00617         e->status = HIDDENGEXPRESSION;
00618         AS.OldOnFile[i] = e->onfile;
00619         AS.OldNumFactors[i] = Expressions[i].numfactors;
00620     }
00621 #ifdef WITHPTHREADS
00622     SetHideFiles();
00623 #endif
00624     UpdateMaxSize();
00625     break;
00626 case DROPEDEXPRESSION:
00627 case DROPLEXPRESSION:
00628 case DROPGEXPRESSION:
00629 case DROPHLEXPRESSION:
00630 case DROPHGEXPRESSION:
00631 case STOREDEXPRESSION:
00632 case HIDDENLEXPRESSION:
00633 case HIDDENGEXPRESSION:
00634 case SPECTATOREXPRESSION:
00635     default:
00636         break;
00637 }
00638 }
00639     AR.KeptInHold = 0;
00640 }
00641     AR.DeferFlag = 0;
00642     AT.WorkPointer = term;
00643 #ifdef HIIDEDEBUG
00644     MesPrint("Status at the end of Processor (HideLevel = %d)",AC.HideLevel);
00645     for ( i = 0; i < NumExpressions; i++ ) {
00646         e = Expressions+i;
00647         ExprStatus(e);
00648     }
00649 #endif
00650     return(retval);
00651 ProcErr:
00652     AT.WorkPointer = term;
00653     if ( AM.tracebackflag ) MesCall("Processor");
00654     return(-1);
00655 }
00656 /*

```



```

00657         #] Processor :
00658         #[ TestSub :             WORD TestSub(term,level)
00659     */
00683 #define DONE(x) { retvalue = x; goto Done; }
00684
00685 WORD TestSub(PHEAD WORD *term, WORD level)
00686 {
00687     GETBIDENTITY
00688     WORD *m, *t, *r, retvalue = 0, funflag, j, oldncmod, nexpr, *Tpattern = 0;
00689     WORD *stop, *t1, *t2, funnum, wilds, tbufnum, stilldirty = 0;
00690     NESTING n;
00691     CBUF *C = cbuf+AT.ebufnum;
00692     LONG isp, i;
00693     TABLES T;
00694     COMPARE oldcompareroutine = (COMPARE)(AR.CompareRoutine);
00695     WORD oldsorttype = AR.SortType;
00696     ReStart:
00697     tbufnum = 0; i = 0; retvalue = 0;
00698     AT.TMbuff = AM.rbufnum;
00699     funflag = 0;
00700     t = term;
00701     r = t + *t - 1;
00702     m = r - ABS(*r) + 1;
00703     t++;
00704     if ( t < m ) do {
00705         if ( *t == SUBEXPRESSION ) {
00706             /*
00707              Subexpression encountered
00708              There may be more than one.
00709              The old strategy was to take the last.
00710              A newer strategy was to take the lowest power first.
00711              The current strategy is that we compute the number of terms
00712              generated by this subexpression and take the minimum of that.
00713             */
00714
00715 #ifdef WHICHSUBEXPRESSION
00716
00717             WORD *tmin = t, AN.nbino;
00718             /* LONG minval = MAXLONG; */
00719             LONG minval = -1;
00720             LONG mm, mnum1 = 1;
00721             if ( AN.BinoScrat == 0 ) {
00722                 AN.BinoScrat = (UWORD *)Malloc1((AM.MaxTal+2)*sizeof(UWORD),"GetBinoScrat");
00723             }
00724 #endif
00725             if ( t[3] ) {
00726                 r = t + t[1];
00727                 while ( AN.subsubveto == 0 &&
00728                     *r == SUBEXPRESSION && r < m && r[3] ) {
00729 #ifdef WHICHSUBEXPRESSION
00730                     mnum1++;
00731 #endif
00732                     if ( r[1] == t[1] && r[2] == t[2] && r[4] == t[4] ) {
00733                         j = t[1] - SUBEXPSIZE;
00734                         t1 = t + SUBEXPSIZE;
00735                         t2 = r + SUBEXPSIZE;
00736                         while ( j > 0 && *t1++ == *t2++ ) j--;
00737                         if ( j <= 0 ) {
00738                             t[3] += r[3];
00739                             if ( t[3] == 0 ) {
00740                                 t1 = r + r[1];
00741                                 t2 = term + *term;
00742                                 *term -= r[1]+t[1];
00743                                 r = t;
00744                                 while ( t1 < t2 ) *r++ = *t1++;
00745                                 goto ReStart;
00746                             }
00747                             else {
00748                                 t1 = r + r[1];
00749                                 t2 = term + *term;
00750                                 *term -= r[1];
00751                                 m -= r[1];
00752                                 while ( t1 < t2 ) *r++ = *t1++;
00753                                 r = t;
00754                             }
00755                         }
00756                     }
00757 #ifdef WHICHSUBEXPRESSION
00758
00759                     else if ( t[2] >= 0 ) {
00760                         /*
00761                          Compute Binom(numterms+power-1,power-1)
00762                          We need potentially long arithmetic.
00763                          That is why we had to allocate AN.BinoScrat
00764                         */
00765                         if ( AN.last1 == t[3] && AN.last2 == cbuf[t[4]].NumTerms[t[2]] + t[3] - 1 ) {
00766                             if ( AN.last3 > minval ) {

```

```

00767             minval = AN.last3; tmin = t;
00768         }
00769     }
00770     else {
00771         AN.last1 = t[3]; mm = AN.last2 = cbuf[t[4]].NumTerms[t[2]] + t[3] - 1;
00772         if ( t[3] == 1 ) {
00773             if ( mm > minval ) {
00774                 minval = mm; tmin = t;
00775             }
00776         }
00777         else if ( t[3] > 0 ) {
00778             if ( mm > MAXPOSITIVE ) goto TooMuch;
00779             GetBinom(AN.BinoScrat,&AN.nbino,(WORD)mm,t[3]);
00780             if ( AN.nbino > 2 ) goto TooMuch;
00781             if ( AN.nbino == 2 ) {
00782                 mm = AN.BinoScrat[1];
00783                 mm = ( mm << BITSINWORD ) + AN.BinoScrat[0];
00784             }
00785             else if ( AN.nbino == 1 ) mm = AN.BinoScrat[0];
00786             else mm = 0;
00787             if ( mm > minval ) {
00788                 minval = mm; tmin = t;
00789             }
00790         }
00791         AN.last3 = mm;
00792     }
00793 }
00794 #endif
00795 t = r;
00796 r += r[1];
00797 }
00798 #ifdef WHICHSUBEXPRESSION
00799     if ( mnum1 > 1 && t[2] >= 0 ) {
00800         /*
00801             To keep the flowcontrol simple we duplicate some code here
00802         */
00803         if ( AN.last1 == t[3] && AN.last2 == cbuf[t[4]].NumTerms[t[2]] + t[3] - 1 ) {
00804             if ( AN.last3 > minval ) {
00805                 minval = AN.last3; tmin = t;
00806             }
00807         }
00808         else {
00809             AN.last1 = t[3]; mm = AN.last2 = cbuf[t[4]].NumTerms[t[2]] + t[3] - 1;
00810             if ( t[3] == 1 ) {
00811                 if ( mm > minval ) {
00812                     minval = mm; tmin = t;
00813                 }
00814             }
00815             else if ( t[3] > 0 ) {
00816                 if ( mm > MAXPOSITIVE ) {
00817                     /*
00818                         We will generate more terms than we can count
00819                     */
00820                     TooMuch;;
00821                     MLOCK(ErrorMessageLock);
00822                     MesPrint("Attempt to generate more terms than FORM can count");
00823                     MUNLOCK(ErrorMessageLock);
00824                     Terminate(-1);
00825                 }
00826                 GetBinom(AN.BinoScrat,&AN.nbino,(WORD)mm,t[3]);
00827                 if ( AN.nbino > 2 ) goto TooMuch;
00828                 if ( AN.nbino == 2 ) {
00829                     mm = AN.BinoScrat[1];
00830                     mm = ( mm << BITSINWORD ) + AN.BinoScrat[0];
00831                 }
00832                 else if ( AN.nbino == 1 ) mm = AN.BinoScrat[0];
00833                 else mm = 0;
00834                 if ( mm > minval ) {
00835                     minval = mm; tmin = t;
00836                 }
00837             }
00838             AN.last3 = mm;
00839         }
00840     }
00841     t = tmin;
00842 #endif
00843 /*
00844     AR.TePos = 0;
00845     AR.TePos = WORDDIF(t,term);
00846     AT.TMbuff = t[4];
00847     if ( t[4] == AM.dbufnum && (t+t[1]) < m && t[t[1]] == DOLLAREXP2 ) {
00848         if ( t[t[1]+2] < 0 ) AT.TMdolfac = -t[t[1]+2];
00849         else { /* resolve the element number */
00850             AT.TMdolfac = GetDolNum(BHEAD t+t[1],m)+1;
00851         }
00852     }
00853     else AT.TMdolfac = 0;
00854     if ( t[3] < 0 ) {

```

```

00854         AN.TeInFun = 1;
00855         AR.TePos = WORDDIF(t,term);
00856         DONE(t[2])
00857     }
00858     else {
00859         AN.TeInFun = 0;
00860         AN.TeSuOut = t[3];
00861     }
00862     if ( t[2] < 0 ) {
00863         AN.TeSuOut = -t[3];
00864         DONE(-t[2])
00865     }
00866     DONE(t[2])
00867 }
00868 }
00869 else if ( *t == EXPRESSION ) {
00870     WORD *toTMaddr;
00871     i = -t[2] - 1;
00872     if ( t[3] < 0 ) {
00873         AN.TeInFun = 1;
00874         AR.TePos = WORDDIF(t,term);
00875         DONE(i)
00876     }
00877     nexpr = t[3];
00878     toTMaddr = m = AT.WorkPointer;
00879     AN.Frozen = 0;
00880 /*
00881     We have to be very careful with respect to setting variables
00882     like AN.TeInFun, because we may still call Generator and that
00883     may change those variables. That is why we set them at the
00884     last moment only.
00885 */
00886     j = t[1];
00887     AT.WorkPointer += j;
00888     r = t;
00889     NCOPY(m,r,j);
00890     r = t + t[1];
00891     t += SUBEXPSIZE;
00892     while ( t < r ) {
00893         if ( *t == FROMBRAC ) {
00894             WORD *tttstop,*tttstop;
00895 /*
00896             Note: Convention is that wildcards are done
00897             after the expression has been picked up. So
00898             no wildcard substitutions are needed here.
00899 */
00900             t += 2;
00901             AN.Frozen = m = AT.WorkPointer;
00902 /*
00903             We should check now for subexpressions and if necessary
00904             we substitute them. Keep in mind: only one term allowed!
00905
00906             In retrospect (26-jan-2010): take also functions that
00907             have a dirty flag on
00908 */
00909             j = *t; tttstop = t + j;
00910             GETSTOP(t,tttstop);
00911             *m++ = j; t++;
00912             while ( t < tttstop ) {
00913                 if ( *t == SUBEXPRESSION ) break;
00914                 if ( *t >= FUNCTION && ( ( t[2] & DIRTYFLAG ) == DIRTYFLAG ) ) break;
00915                 j = t[1]; NCOPY(m,t,j);
00916             }
00917             if ( t < tttstop ) {
00918 /*
00919                 We ran into a subexpression or a function with a
00920                 'dirty' argument. It could also be a $ or
00921                 just e[(a^2)*b]. In all cases we should evaluate
00922 */
00923                 while ( t < tttstop ) *m++ = *t++;
00924                 *AT.WorkPointer = m-AT.WorkPointer;
00925                 m = AT.WorkPointer;
00926                 AT.WorkPointer = m + *m;
00927                 NewSort(BHEAD0);
00928                 if ( Generator(BHEAD m,AR.Cnumlhs) ) {
00929                     LowerSortLevel(); goto EndTest;
00930                 }
00931                 if ( EndSort(BHEAD m,0) < 0 ) goto EndTest;
00932                 AN.Frozen = m;
00933                 if ( *m == 0 ) {
00934                     *m++ = 4; *m++ = 1; *m++ = 1; *m++ = 3;
00935                 }
00936                 else if ( m[*m] != 0 ) {
00937                     MLOCK(ErrorMessageLock);
00938                     MesPrint("Bracket specification in expression should be one single term");
00939                     MUNLOCK(ErrorMessageLock);
00940                     Terminate(-1);

```

```

00941         }
00942         else {
00943             m += *m;
00944             m -= ABS(m[-1]);
00945             *m++ = 1; *m++ = 1; *m++ = 3;
00946             *AN.Frozen = m - AN.Frozen;
00947         }
00948     }
00949     else {
00950         while ( t < tttstop ) *m++ = *t++;
00951         *AT.WorkPointer = m-AT.WorkPointer;
00952         m = AT.WorkPointer;
00953         AT.WorkPointer = m + *m;
00954         if ( Normalize(BHEAD m) ) {
00955             MLOCK(ErrorMessageLock);
00956             MesPrint("Error while picking up contents of bracket");
00957             MUNLOCK(ErrorMessageLock);
00958             Terminate(-1);
00959         }
00960         if ( !*m ) {
00961             *m++ = 4; *m++ = 1; *m++ = 1; *m++ = 3;
00962         }
00963         else m += *m;
00964     }
00965     AT.WorkPointer = m;
00966     break;
00967 }
00968 t += t[1];
00969 }
00970 AN.TeInFun = 0;
00971 AR.TePos = 0;
00972 AN.TeSuOut = nexpr;
00973 AT.TMaddr = toTMaddr;
00974 DONE(i)
00975 }
00976 else if ( *t >= FUNCTION ) {
00977     if ( t[0] == EXPONENT ) {
00978         if ( t[1] == FUNHEAD+4 && t[FUNHEAD] == -SYMBOL &&
00979             t[FUNHEAD+2] == -SNUMBER && t[FUNHEAD+3] < MAXPOWER
00980             && t[FUNHEAD+3] > -MAXPOWER ) {
00981             t[0] = SYMBOL;
00982             t[1] = 4;
00983             t[2] = t[FUNHEAD+1];
00984             t[3] = t[FUNHEAD+3];
00985             r = term + *term;
00986             m = t + FUNHEAD+4;
00987             t += 4;
00988             while ( m < r ) *t++ = *m++;
00989             *term = WORDDIF(t,term);
00990             goto ReStart;
00991         }
00992     else if ( t[1] == FUNHEAD+ARGHEAD+11 && t[FUNHEAD] == ARGHEAD+9
00993         && t[FUNHEAD+ARGHEAD] == 9 && t[FUNHEAD+ARGHEAD+1] == DOTPRODUCT
00994         && t[FUNHEAD+ARGHEAD+8] == 3
00995         && t[FUNHEAD+ARGHEAD+7] == 1
00996         && t[FUNHEAD+ARGHEAD+6] == 1
00997         && t[FUNHEAD+ARGHEAD+5] == 1
00998         && t[FUNHEAD+ARGHEAD+9] == -SNUMBER
00999         && t[FUNHEAD+ARGHEAD+10] < MAXPOWER
01000         && t[FUNHEAD+ARGHEAD+10] > -MAXPOWER ) {
01001         t[0] = DOTPRODUCT;
01002         t[1] = 5;
01003         t[2] = t[FUNHEAD+ARGHEAD+3];
01004         t[3] = t[FUNHEAD+ARGHEAD+4];
01005         t[4] = t[FUNHEAD+ARGHEAD+10];
01006         r = term + *term;
01007         m = t + FUNHEAD+ARGHEAD+11;
01008         t += 5;
01009         while ( m < r ) *t++ = *m++;
01010         *term = WORDDIF(t,term);
01011         goto ReStart;
01012     }
01013 }
01014 funnum = *t;
01015 if ( *t >= FUNCTION + WILDOFFSET ) funnum -= WILDOFFSET;
01016 if ( *t == EXPONENT ) {
01017     /*
01018     Test whether the second argument is an integer
01019     */
01020     r = t+FUNHEAD;
01021     NEXTARG(r)
01022     if ( *r == -SNUMBER && r[1] < MAXPOWER && r+2 == t+t[1] &&
01023         t[FUNHEAD] > -FUNCTION && ( t[FUNHEAD] != -SNUMBER
01024         || t[FUNHEAD+1] != 0 ) && t[FUNHEAD] != ARGHEAD ) {
01025         if ( r[1] == 0 ) {
01026             if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] == 0 ) {
01027                 MLOCK(ErrorMessageLock);

```

```

01028         MesPrint("Encountered 0^0. Fatal error.");
01029         MUNLOCK(ErrorMessageLock);
01030         SETERROR(-1);
01031     }
01032     *t = DUMMYFUN;
01033 /*
01034         Now mark it clean to avoid further interference.
01035         Normalize will remove this object.
01036 */
01037     t[2] = 0;
01038 }
01039 else {
01040     /* Note that the case 0^ is treated in Normalize */
01041
01042     t1 = AddRHS(AT.ebufnum,1);
01043     m = t + FUNHEAD;
01044     if ( *m > 0 ) {
01045         m += ARGHEAD;
01046         i = t[FUNHEAD] - ARGHEAD;
01047         while ( (t1 + i + 10) > C->Top )
01048             t1 = DoubleCbuffer(AT.ebufnum,t1,9);
01049         while ( --i >= 0 ) *t1++ = *m++;
01050     }
01051     else {
01052         if ( (t1 + 20) > C->Top )
01053             t1 = DoubleCbuffer(AT.ebufnum,t1,10);
01054         ToGeneral(m,t1,1);
01055         t1 += *t1;
01056     }
01057     *t1++ = 0;
01058     C->rhs[C->numrhs+1] = t1;
01059     C->Pointer = t1;
01060
01061     /* No provisions yet for commuting objects */
01062
01063     C->CanCommu[C->numrhs] = 1;
01064     *t++ = SUBEXPRESSION;
01065     *t++ = SUBEXPSIZE;
01066     *t++ = C->numrhs;
01067     *t++ = r[1];
01068     *t++ = AT.ebufnum;
01069 #if SUBEXPSIZE > 5
01070 Important: we may not have enough spots here
01071 #endif
01072     FILLSUB(t) /* Important: We have maybe only 5 spots! */
01073     r += 2;
01074     m = term + *term;
01075     do { *t++ = *r++; } while ( r < m );
01076     *term -= WORDDIF(r,t);
01077     goto ReStart;
01078 }
01079 }
01080 }
01081 else if ( *t == SUMF1 || *t == SUMF2 ) {
01082 /*
01083     What we are looking for is:
01084     1-st argument: Single symbol or index.
01085     2-nd argument: Number.
01086     3-rd argument: Number.
01087     (4-th argument):Number.
01088     One more argument.
01089     This would activate the summation procedure.
01090     Note that the initiated recursion here can be done
01091     without upsetting the regular procedures.
01092 */
01093     WORD *tstop, lcounter, lcmin, lcmax, lcinc;
01094     tstop = t + t[1];
01095     r = t+FUNHEAD;
01096     if ( r+6 < tstop && r[2] == -SNUMBER && r[4] == -SNUMBER
01097         && ( r[0] == -SYMBOL )
01098         || ( r[0] == -INDEX && r[1] >= AM.OffsetIndex
01099             && r[3] >= 0 && r[3] < AM.OffsetIndex
01100             && r[5] >= 0 && r[5] < AM.OffsetIndex ) ) ) {
01101         lcounter = r[0] == -INDEX ? -r[1]: r[1]; /* The loop counter */
01102         lcmin = r[3];
01103         lcmax = r[5];
01104         r += 6;
01105         if ( *r == -SNUMBER && r+2 < tstop ) {
01106             lcinc = r[1];
01107             r += 2;
01108         }
01109         else lcinc = 1;
01110         if ( r < tstop && ( (*r > 0 && (r+r) == tstop )
01111             || (*r <= -FUNCTION && r+1 == tstop )
01112             || (*r > -FUNCTION && *r < 0 && r+2 == tstop ) ) ) {
01113             m = AddRHS(AT.ebufnum,1);
01114             if ( *r > 0 ) {

```

```

01115         i = *r - ARGHEAD;
01116         r += ARGHEAD;
01117         while ( ( m + i + 10 ) > C->Top )
01118             m = DoubleCbuffer(AT.ebufnum,m,11);
01119         while ( --i >= 0 ) *m++ = *r++;
01120     }
01121     else {
01122         while ( ( m + 20 ) > C->Top )
01123             m = DoubleCbuffer(AT.ebufnum,m,12);
01124         ToGeneral(r,m,1);
01125         m += *m;
01126     }
01127     *m++ = 0;
01128     C->rhs[C->numrhs+1] = m;
01129     C->Pointer = m;
01130     m = AT.TMout;
01131     *m++ = 6;
01132     if ( *t == SUMF1 ) *m++ = SUMNUM1;
01133     else *m++ = SUMNUM2;
01134     *m++ = lcounter;
01135     *m++ = lcmin;
01136     *m++ = lcmax;
01137     *m++ = lcinc;
01138     m = t + t[1];
01139     r = C->rhs[C->numrhs];
01140     /*
01141
01142     Test now if the argument was already evaluated.
01143     In that case it needs a new subexpression prototype.
01144     In either case we replace the function now by a
01145     subexpression prototype.
01146
01147     if ( *r >= (SUBEXPSIZE+4)
01148         && ABS(*(r++r-1)) < (*r - 1)
01149         && r[1] == SUBEXPRESSION ) {
01150         r++;
01151         i = r[1] - 5;
01152         *t++ = *r++; *t++ = *r++; *t++ = C->numrhs;
01153         r++; *t++ = *r++; *t++ = AT.ebufnum; r++;
01154         while ( --i >= 0 ) *t++ = *r++;
01155     }
01156     else {
01157         *t++ = SUBEXPRESSION;
01158         *t++ = 4+SUBEXPSIZE;
01159         *t++ = C->numrhs;
01160         *t++ = 1;
01161         *t++ = AT.ebufnum;
01162         FILLSUB(t)
01163         if ( lcounter < 0 ) {
01164             *t++ = INDTOIND;
01165             *t++ = 4;
01166             *t++ = -lcounter;
01167         }
01168         else {
01169             *t++ = SYMTONUM;
01170             *t++ = 4;
01171             *t++ = lcounter;
01172         }
01173         *t++ = lcmin;
01174     }
01175     t2 = term + *term;
01176     while ( m < t2 ) *t++ = *m++;
01177     *term = WORDDIF(t,term);
01178     AN.TeInFun = -C->numrhs;
01179     AR.TePos = 0;
01180     AN.TeSuOut = 0;
01181     AT.TMbuff = AT.ebufnum;
01182     DONE(C->numrhs)
01183 }
01184 }
01185 else if ( *t == TOPOLOGIES ) {
01186     /*
01187     Syntax:
01188     topologies_(nloops,nlegs,setvertexsizes,setext,setint[,options])
01189     */
01190     t1 = t+FUNHEAD; t2 = t+t[1];
01191     if ( *t1 == -SNUMBER && t1[1] >= 0 &&
01192         t1[2] == -SNUMBER && ( t1[3] >= 0 || t1[3] == -2 ) &&
01193         t1[4] == -SETSET && Sets[t1[5]].type == CNUMBER &&
01194         t1[6] == -SETSET && Sets[t1[7]].type == CVECTOR &&
01195         t1[8] == -SETSET && Sets[t1[9]].type == CVECTOR &&
01196         t1+10 <= t2 ) {
01197         if ( t1+10 == t2 || ( t1+12 <= t2 && ( t1[10] == -SNUMBER ||
01198             ( t1[10] == -SETSET &&
01199                 Sets[t1[5]].last-Sets[t1[5]].first ==
01200                 Sets[t1[11]].last-Sets[t1[11]].first ) ) ) ) {
01201             AN.TeInFun = -15;

```

```

01202             AN.TeSuOut = 0;
01203             AR.TePos = -1;
01204             AR.funoffset = t - term;
01205             DONE(1)
01206         }
01207     }
01208 }
01209 else if ( *t == DIAGRAMS ) {
01210 /*
01211     Syntax:
01212     diagrams_(model,setinparticles,setoutparticles,
01213         setextmomenta,setintmomenta,couplings or loops)
01214 */
01215     if ( AC.nummodels > 0 ) { /* No model, no diagrams */
01216         t1 = t+FUNHEAD; t2 = t+t[1];
01217         if (
01218             t1[0] == -SETSET && Sets[t1[1]].type == CMODEL &&
01219             t1[2] == -SETSET && ( Sets[t1[3]].type == CFUNCTION
01220                 || ( Sets[t1[3]].type == ANYTYPE && ( Sets[t1[3]].first == Sets[t1[3]].last ) ) )
01221             &&
01222             t1[4] == -SETSET && ( Sets[t1[5]].type == CFUNCTION
01223                 || ( Sets[t1[5]].type == ANYTYPE && ( Sets[t1[5]].first == Sets[t1[5]].last ) ) )
01224             &&
01225             t1[6] == -SETSET && Sets[t1[7]].type == CVECTOR &&
01226             t1[8] == -SETSET && Sets[t1[9]].type == CVECTOR &&
01227             t1+12 <= t2 ) {
01228             /*
01229             Test that the sets of particles correspond to particles
01230             of the set model.
01231             */
01232             MODEL *m = AC.models[SetElements[Sets[t1[1]].first]];
01233             int nn0,nn1,nn2;
01234             for ( nn0 = 3; nn0 <= 5; nn0 += 2 ) {
01235                 for ( nn1 = Sets[t1[nn0]].first; nn1 < Sets[t1[nn0]].last; nn1++ ) {
01236                     for ( nn2 = 0; nn2 < m->nparticles; nn2++ ) {
01237                         if ( m->vertices[nn2]->particles[0].number == SetElements[nn1]
01238                             || m->vertices[nn2]->particles[1].number == SetElements[nn1] ) break;
01239                     }
01240                     if ( nn2 >= m->nparticles ) goto doesnotwork;
01241                 }
01242             }
01243             /*
01244             Now test for a single argument indicating the order
01245             in perturbation theory.
01246             */
01247             if ( ( t1[10] == -SNUMBER && t1[11] >= 0 && t1+12 == t2 )
01248                 || ( t1[10] == -SYMBOL && t1+12 == t2 )
01249                 || ( t1+10+t1[10] == t2 && t1+10+ARGHEAD+t1[10+ARGHEAD] == t2
01250                     && t1[11+ARGHEAD] == SYMBOL ) ) {
01251             /*
01252             Now test that all symbols are valid coupling constants.
01253             */
01254             if ( t1+12 > t2 ) {
01255                 WORD *ttl = t1+13+ARGHEAD, im;
01256                 t2 -= ABS(t2[-1]);
01257                 while ( ttl < t2 ) {
01258                     for ( im = 0; im < m->ncouplings; im++ ) {
01259                         if ( *ttl == m->couplings[im] ) break;
01260                     }
01261                     if ( im >= m->ncouplings ) goto doesnotwork;
01262                     ttl += 2;
01263                 }
01264                 AN.TeInFun = -16;
01265                 AN.TeSuOut = 0;
01266                 AR.TePos = -1;
01267                 AR.funoffset = t - term;
01268                 DONE(1)
01269             }
01270             else if ( ( ( t1[10] == -SNUMBER && t1[11] >= 0 && t1+12 == t2-2 )
01271                 || ( t1[10] == -SYMBOL && t1+12 == t2-2 )
01272                 || ( t1+10+t1[10] == t2-2 && t1+10+ARGHEAD+t1[10+ARGHEAD] == t2-2
01273                     && t1[11+ARGHEAD] == SYMBOL ) ) && t2[-2] == -SNUMBER ) {
01274             /*
01275             With options at t2[-2],t2[-1]
01276             Now test that all symbols are valid coupling constants.
01277             */
01278             t2 -= 2;
01279             if ( t1+12 > t2 ) {
01280                 WORD *ttl = t1+13+ARGHEAD, im;
01281                 t2 -= ABS(t2[-1]);
01282                 while ( ttl < t2 ) {
01283                     for ( im = 0; im < m->ncouplings; im++ ) {
01284                         if ( *ttl == m->couplings[im] ) break;
01285                     }
01286                     if ( im >= m->ncouplings ) goto doesnotwork;
01287                     ttl += 2;
01288                 }

```

```

01287         }
01288     }
01289     AN.TeInFun = -16;
01290     AN.TeSuOut = 0;
01291     AR.TePos = -1;
01292     AR.funoffset = t - term;
01293     DONE(1)
01294 }
01295 doesnotwork;;
01296     }
01297 }
01298 }
01299 if ( functions[funnum-FUNCTION].spec <= 0
01300     || ( t[2] & (DIRTYFLAG|MUSTCLEANPRF) ) != 0 ) {
01301     funflag = 1;
01302 }
01303 if ( *t <= MAXBUILTINFUNCTION ) {
01304     if ( *t <= DELTAP && *t >= THETA ) { /* Speeds up by 2 or 3 compares */
01305         if ( *t == THETA || *t == THETA2 ) {
01306             WORD *tstop, *tt2, kk;
01307             tstop = t + t[1];
01308             tt2 = t + FUNHEAD;
01309             while ( tt2 < tstop ) {
01310                 if ( *tt2 > 0 && tt2[1] != 0 ) goto DoSpec;
01311                 NEXTARG(tt2)
01312             }
01313             if ( !AT.RecFlag ) {
01314                 if ( ( kk = DoTheta(BHEAD t) ) == 0 ) {
01315                     *term = 0;
01316                     DONE(0)
01317                 }
01318                 else if ( kk > 0 ) {
01319                     m = t + t[1];
01320                     r = term + *term;
01321                     while ( m < r ) *t++ = *m++;
01322                     *term = WORDDIF(t,term);
01323                     goto ReStart;
01324                 }
01325             }
01326         }
01327     else if ( *t == DELTA2 || *t == DELTAP ) {
01328         WORD *tstop, *tt2, kk;
01329         tstop = t + t[1];
01330         tt2 = t + FUNHEAD;
01331         while ( tt2 < tstop ) {
01332             if ( *tt2 > 0 && tt2[1] != 0 ) goto DoSpec;
01333             NEXTARG(tt2)
01334         }
01335         if ( !AT.RecFlag ) {
01336             if ( ( kk = DoDelta(t) ) == 0 ) {
01337                 *term = 0;
01338                 DONE(0)
01339             }
01340             else if ( kk > 0 ) {
01341                 m = t + t[1];
01342                 r = term + *term;
01343                 while ( m < r ) *t++ = *m++;
01344                 *term = WORDDIF(t,term);
01345                 goto ReStart;
01346             }
01347         }
01348     } }
01349 else if ( *t == DISTRIBUTION && t[FUNHEAD] == -SNUMBER
01350     && t[FUNHEAD+1] >= -2 && t[FUNHEAD+1] <= 2
01351     && t[FUNHEAD+2] == -SNUMBER
01352     && t[FUNHEAD+4] <= -FUNCTION
01353     && t[FUNHEAD+5] <= -FUNCTION ) {
01354     WORD *ttt = t+FUNHEAD+6, *tttstop = t+t[1];
01355     while ( ttt < tttstop ) {
01356         if ( *ttt == -DOLLAREXPRESSION ) break;
01357         NEXTARG(ttt);
01358     }
01359     if ( ttt >= tttstop ) {
01360         AN.TeInFun = -1;
01361         AN.TeSuOut = 0;
01362         AR.TePos = -1;
01363         DONE(1)
01364     }
01365 }
01366 else if ( *t == DELTA3 && ((t[1]-FUNHEAD) & 1) == 0 ) {
01367     AN.TeInFun = -2;
01368     AN.TeSuOut = 0;
01369     AR.TePos = -1;
01370     DONE(1)
01371 }
01372 else if ( ( *t == TABLEFUNCTION ) && ( t[FUNHEAD] <= -FUNCTION )
01373     && ( T = functions[-t[FUNHEAD]-FUNCTION].tabl ) != 0

```



```

01374         && ( t[1] >= FUNHEAD+1+2*ABS(T->numind) )
01375         && ( t[FUNHEAD+1] == -SYMBOL ) ) {
01376     /*
01377         The case of table_(tab,sym1,...,symn)
01378     */
01379     for ( isp = 0; isp < ABS(T->numind); isp++ ) {
01380         if ( t[FUNHEAD+1+2*isp] != -SYMBOL ) break;
01381     }
01382     if ( isp >= ABS(T->numind) ) {
01383         AN.TeInFun = -3;
01384         AN.TeSuOut = 0;
01385         AR.TePos = -1;
01386         DONE(1)
01387     }
01388 }
01389 else if ( *t == TABLEFUNCTION && t[FUNHEAD] <= -FUNCTION
01390 && ( T = functions[-t[FUNHEAD]-FUNCTION].tabl ) != 0
01391 && ( t[1] == FUNHEAD+2 )
01392 && ( t[FUNHEAD+1] <= -FUNCTION ) ) {
01393     /*
01394         The case of table_(tab,fun)
01395     */
01396     AN.TeInFun = -3;
01397     AN.TeSuOut = 0;
01398     AR.TePos = -1;
01399     DONE(1)
01400 }
01401 else if ( *t == FACTORIN ) {
01402     if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -DOLLAREXPRESSION ) {
01403         AN.TeInFun = -4;
01404         AN.TeSuOut = 0;
01405         AR.TePos = -1;
01406         DONE(1)
01407     }
01408     else if ( t[1] == FUNHEAD+2 && t[FUNHEAD] == -EXPRESSION ) {
01409         AN.TeInFun = -5;
01410         AN.TeSuOut = 0;
01411         AR.TePos = -1;
01412         DONE(1)
01413     }
01414 }
01415 else if ( *t == TERMSINBRACKET ) {
01416     if ( t[1] == FUNHEAD || (
01417         t[1] == FUNHEAD+2
01418         && t[FUNHEAD] == -SNUMBER
01419         && t[FUNHEAD+1] == 0
01420     ) ) {
01421         AN.TeInFun = -6;
01422         AN.TeSuOut = 0;
01423         AR.TePos = -1;
01424         DONE(1)
01425     }
01426     /*
01427         The other cases have not yet been implemented
01428         We still have to add the case of short arguments
01429         First the different bracket in same expression
01430
01431     else if ( t[1] > FUNHEAD+ARGHEAD
01432         && t[FUNHEAD] == t[1]-FUNHEAD
01433         && t[FUNHEAD+ARGHEAD] == t[1]-FUNHEAD-ARGHEAD
01434         && t[t[1]-1] == 3
01435         && t[t[1]-2] == 1
01436         && t[t[1]-3] == 1 ) {
01437         AN.TeInFun = -6;
01438         AN.TeSuOut = 0;
01439         AR.TePos = -1;
01440         DONE(1)
01441     }
01442
01443     Next the bracket in an other expression
01444
01445     else if ( t[1] > FUNHEAD+ARGHEAD+2
01446         && t[FUNHEAD] == -EXPRESSION
01447         && t[FUNHEAD+2] == t[1]-FUNHEAD-2
01448         && t[FUNHEAD+ARGHEAD+2] == t[1]-FUNHEAD-ARGHEAD-2
01449         && t[t[1]-1] == 3
01450         && t[t[1]-2] == 1
01451         && t[t[1]-3] == 1 ) {
01452         AN.TeInFun = -6;
01453         AN.TeSuOut = 0;
01454         AR.TePos = -1;
01455         DONE(1)
01456     }
01457     */
01458 }
01459 else if ( *t == EXTRASYMFUN ) {
01460     if ( t[1] == FUNHEAD+2 && (

```

```

01461         ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] <= cbuf[AM.sbufnum].numrhs
01462             && t[FUNHEAD+1] > 0 ) ||
01463         ( t[FUNHEAD] == -SYMBOL && t[FUNHEAD+1] < MAXVARIABLES
01464             && t[FUNHEAD+1] >= MAXVARIABLES-cbuf[AM.sbufnum].numrhs ) ) {
01465     AN.TeInFun = -7;
01466     AN.TeSuOut = 0;
01467     AR.TePos = -1;
01468     DONE(1)
01469 }
01470 else if ( t[1] == FUNHEAD ) {
01471     AN.TeInFun = -7;
01472     AN.TeSuOut = 0;
01473     AR.TePos = -1;
01474     DONE(1)
01475 }
01476 }
01477 else if ( *t == DIVFUNCTION || *t == REMFUNCTION
01478     || *t == INVERSEFUNCTION || *t == MULFUNCTION
01479     || *t == GCDFUNCTION ) {
01480     WORD *tf;
01481     int todo = 1, numargs = 0;
01482     tf = t + FUNHEAD;
01483     while ( tf < t + t[1] ) {
01484         DOLLARS d;
01485         if ( *tf == -DOLLEXPRESSION ) {
01486             d = Dollars + tf[1];
01487             if ( d->type == DOLWILDARGS ) {
01488                 WORD *tterm = AT.WorkPointer, *tw;
01489                 WORD *ta = term, *tb = tterm, *tc, *td = term + *term;
01490                 while ( ta < t ) *tb++ = *ta++;
01491                 tc = tb;
01492                 while ( ta < tf ) *tb++ = *ta++;
01493                 tw = d->where+1;
01494                 while ( *tw ) {
01495                     if ( *tw < 0 ) {
01496                         if ( *tw > -FUNCTION ) *tb++ = *tw++;
01497                         *tb++ = *tw++;
01498                     }
01499                     else {
01500                         int ia;
01501                         for ( ia = 0; ia < *tw; ia++ ) *tb++ = *tw++;
01502                     }
01503                 }
01504                 NEXTARG(ta)
01505                 while ( ta < t+t[1] ) *tb++ = *ta++;
01506                 tc[1] = tb-tc;
01507                 while ( ta < td ) *tb++ = *ta++;
01508                 *tterm = tb - tterm;
01509                 {
01510                     int ia, na = *tterm;
01511                     ta = tterm; tb = term;
01512                     for ( ia = 0; ia < na; ia++ ) *tb++ = *ta++;
01513                 }
01514                 if ( tb > AT.WorkTop ) {
01515                     MLOCK(ErrorMessageLock);
01516                     MesWork();
01517                     goto EndTest2;
01518                 }
01519                 AT.WorkPointer = tb;
01520                 goto Restart;
01521             }
01522         }
01523         NEXTARG(tf);
01524     }
01525     tf = t + FUNHEAD;
01526     while ( tf < t + t[1] ) {
01527         numargs++;
01528         if ( *tf > 0 && tf[1] != 0 ) todo = 0;
01529         NEXTARG(tf);
01530     }
01531     if ( todo && numargs == 2 ) {
01532         if ( *t == DIVFUNCTION ) AN.TeInFun = -9;
01533         else if ( *t == REMFUNCTION ) AN.TeInFun = -10;
01534         else if ( *t == INVERSEFUNCTION ) AN.TeInFun = -11;
01535         else if ( *t == MULFUNCTION ) AN.TeInFun = -14;
01536         else if ( *t == GCDFUNCTION ) AN.TeInFun = -8;
01537         AN.TeSuOut = 0;
01538         AR.TePos = -1;
01539         DONE(1)
01540     }
01541     else if ( todo && numargs == 3 ) {
01542         if ( *t == DIVFUNCTION ) AN.TeInFun = -9;
01543         else if ( *t == REMFUNCTION ) AN.TeInFun = -10;
01544         else if ( *t == GCDFUNCTION ) AN.TeInFun = -8;
01545         AN.TeSuOut = 0;
01546         AR.TePos = -1;
01547         DONE(1)

```

```

01548         }
01549         else if ( todo && *t == GCDFUNCTION ) {
01550             AN.TeInFun = -8;
01551             AN.TeSuOut = 0;
01552             AR.TePos = -1;
01553             DONE(1)
01554         }
01555     }
01556     else if ( *t == PERMUTATIONS && ( ( t[1] >= FUNHEAD+1
01557         && t[FUNHEAD] <= -FUNCTION ) || ( t[1] >= FUNHEAD+3
01558         && t[FUNHEAD] == -SNUMBER && t[FUNHEAD+2] <= -FUNCTION ) ) ) {
01559         AN.TeInFun = -12;
01560         AN.TeSuOut = 0;
01561         AR.TePos = -1;
01562         DONE(1)
01563     }
01564     else if ( *t == PARTITIONS ) {
01565         if ( TestPartitions(t,&(AT.partitions)) ) {
01566             AT.partitions.where = t-term;
01567             AN.TeInFun = -13;
01568             AN.TeSuOut = 0;
01569             AR.TePos = -1;
01570             DONE(1)
01571         }
01572     }
01573 }
01574 }
01575 t += t[1];
01576 } while ( t < m );
01577 if ( funflag ) { /* Search in functions */
01578 DoSpec:
01579     t = term;
01580     AT.NestPoin->termsize = t;
01581     if ( AT.NestPoin == AT.Nest ) AN.EndNest = t + *t;
01582     t++;
01583     oldncmod = AN.ncmod;
01584     if ( t < m ) do {
01585         if ( *t < FUNCTION ) {
01586             t += t[1]; continue;
01587         }
01588         if ( AN.ncmod && ( ( AC.modmode & ALSOFUNARGS ) == 0 ) ) {
01589             if ( *t != AR.PolyFun ) AN.ncmod = 0;
01590             else AN.ncmod = oldncmod;
01591         }
01592         r = t + t[1];
01593         funnum = *t;
01594         if ( *t >= FUNCTION + WILDOFFSET ) funnum -= WILDOFFSET;
01595         if ( ( *t == NUMFACTORS || *t == FIRSTTERM || *t == CONTENTTERM )
01596             && t[1] == FUNHEAD+2 &&
01597             ( t[FUNHEAD] == -EXPRESSION || t[FUNHEAD] == -DOLLAREXPRESSION ) ) {
01598             /*
01599                 if ( *t == NUMFACTORS ) {
01600                     This we leave for Normalize
01601                 }
01602             */
01603         }
01604         else if ( functions[funnum-FUNCTION].spec <= 0 ) {
01605             AT.NestPoin->funsiz = t + 1;
01606             t1 = t;
01607             t += FUNHEAD;
01608             while ( t < r ) { /* Sum over arguments */
01609                 if ( *t > 0 && t[1] ) { /* Argument is dirty */
01610                     AT.NestPoin->argsize = t;
01611                     AT.NestPoin++;
01612                     stop = t + *t; /*
01613                         t2 = t;
01614                         t += ARGHEAD;
01615                         while ( t < AT.NestPoin[-1].argsize+(AT.NestPoin[-1].argsize) ) {
01616                             /* Sum over terms */
01617                             AT.RecFlag++;
01618                             i = *t;
01619                             AN.subsubveto = 1;
01620                             /*
01621                                 AN.subsubveto repairs a bug that became apparent
01622                                 in an example by York Schroeder:
01623                                 f(k1.k1)*replace_(k1,2*k2)
01624                                 Is it possible to repair the counting of the various
01625                                 length indicators? (JV 1-jun-2010)
01626                             */
01627                                 if ( ( retvalue = TestSub(BHEAD t,level) ) != 0 ) {
01628                                     /*
01629                                         Possible size changes:
01630                                         Note defs at 471,467,460,400,425,328
01631                                     */
01632                                 }
01633                             }
01634                             /*

```

```

01635         i -= *t;
01636         *t2 -= i;
01637         t1[1] -= i;
01638         t += *t;
01639         r = t + i;
01640         m = term + *term;
01641         while ( r < m ) *t++ = *r++;
01642         *term -= i;
01643     */
01644
01645         i -= *t;
01646         t += *t;
01647         r = t + i;
01648         m = AN.EndNest;
01649         while ( r < m ) *t++ = *r++;
01650         t = AT.NestPoin[-1].argsize + ARGHEAD;
01651         n = AT.Nest;
01652         while ( n < AT.NestPoin ) {
01653             *(n->argsize) -= i;
01654             *(n->funsize) -= i;
01655             *(n->termsize) -= i;
01656             n++;
01657         }
01658         AN.EndNest -= i;
01659     }
01660     AN.subsubveto = 0;
01661     t1[2] = 1;
01662     if ( *t1 == AR.PolyFun && AR.PolyFunType == 2 )
01663         t1[2] |= MUSTCLEANPRF;
01664     AT.RecFlag--;
01665     AT.NestPoin--;
01666     AN.TeInFun++;
01667     AR.TePos = 0;
01668     AN.ncmod = oldncmod;
01669     DONE(retvalue)
01670 }
01671 else {
01672     /*
01673     * Somehow the next line fixes Issue #106.
01674     */
01675     i = *t;
01676     Normalize(BHEAD t);
01677     if ( i > *t ) { retvalue = 1; goto redosize; } */
01678     /*
01679     * Experimentally, the next line fixes Issue #105.
01680     */
01681     if ( *t == 0 ) { retvalue = 1; goto redosize; }
01682     {
01683         WORD *tend = t + *t, *tt = t+1;
01684         stilldirty = 0;
01685         tend -= ABS(tend[-1]);
01686         while ( tt < tend ) {
01687             if ( *tt == SUBEXPRESSION || *tt == EXPRESSION ) {
01688                 stilldirty = 1; break;
01689             }
01690             tt += tt[1];
01691         }
01692     }
01693     if ( i > *t ) {
01694         /*
01695         We should not forget to correct the Nest
01696         stack. That caused trouble in the past.
01697         */
01698         retvalue = 1;
01699         i -= *t;
01700         t += *t;
01701         r = t + i;
01702         m = AN.EndNest;
01703         while ( r < m ) *t++ = *r++;
01704         t = AT.NestPoin[-1].argsize + ARGHEAD;
01705         n = AT.Nest;
01706         while ( n < AT.NestPoin ) {
01707             *(n->argsize) -= i;
01708             *(n->funsize) -= i;
01709             *(n->termsize) -= i;
01710             n++;
01711         }
01712         AN.EndNest -= i;
01713     }
01714     }
01715     AN.subsubveto = 0;
01716     AT.RecFlag--;
01717     t += *t;
01718 }
01719 AT.NestPoin--;
01720 /*
01721 Argument contains no subexpressions.
01722 It should be normalized and sorted.

```

```

01722                                     The main problem is the storage.
01723 */
01724 t = AT.NestPoin->argsize;
01725 j = *t;
01726 t += ARGHEAD;
01727 NewSort(BHEAD0);
01728 if ( *t1 == AR.PolyFun && AR.PolyFunType == 2 ) {
01729     AR.CompareRoutine = (COMPAREDUMMY)(&CompareSymbols);
01730     AR.SortType = SORTHIGHFIRST;
01731 }
01732 if ( AT.WorkPointer < term + *term )
01733     AT.WorkPointer = term + *term;
01734
01735 while ( t < AT.NestPoin->argsize+(AT.NestPoin->argsize) ) {
01736     m = AT.WorkPointer;
01737     r = t + *t;
01738     do { *m++ = *t++; } while ( t < r );
01739     r = AT.WorkPointer;
01740     AT.WorkPointer = r + *r;
01741     if ( Normalize(BHEAD r) ) {
01742         if ( *t1 == AR.PolyFun && AR.PolyFunType == 2 ) {
01743             AR.SortType = oldsorttype;
01744             AR.CompareRoutine = (COMPAREDUMMY)oldcompareroutine;
01745             t1[2] |= MUSTCLEANPRF;
01746         }
01747         LowerSortLevel(); goto EndTest;
01748     }
01749     if ( AN.ncmod != 0 ) {
01750         if ( *r ) {
01751             if ( Modulus(r) ) {
01752                 LowerSortLevel();
01753                 AT.WorkPointer = r;
01754                 if ( *t1 == AR.PolyFun && AR.PolyFunType == 2 ) {
01755                     AR.SortType = oldsorttype;
01756                     AR.CompareRoutine = (COMPAREDUMMY)oldcompareroutine;
01757                     t1[2] |= MUSTCLEANPRF;
01758                 }
01759                 goto EndTest;
01760             }
01761         }
01762     }
01763     if ( AR.PolyFun > 0 ) {
01764         if ( PrepPoly(BHEAD r,1) != 0 ) goto EndTest;
01765     }
01766     if ( *r ) StoreTerm(BHEAD r);
01767     AT.WorkPointer = r;
01768 }
01769 if ( EndSort(BHEAD AT.WorkPointer+ARGHEAD,1) < 0 ) goto EndTest;
01770 m = AT.WorkPointer+ARGHEAD;
01771 if ( *t1 == AR.PolyFun && AR.PolyFunType == 2 ) {
01772     AR.SortType = oldsorttype;
01773     AR.CompareRoutine = (COMPAREDUMMY)oldcompareroutine;
01774     t1[2] |= MUSTCLEANPRF;
01775 }
01776 while ( *m ) m += *m;
01777 i = WORDDIF(m,AT.WorkPointer);
01778 *AT.WorkPointer = i;
01779 AT.WorkPointer[1] = stilldirty;
01780 if ( ToFast(AT.WorkPointer,AT.WorkPointer) ) {
01781     m = AT.WorkPointer;
01782     if ( *m <= -FUNCTION ) { m++; i = 1; }
01783     else { m += 2; i = 2; }
01784 }
01785 j = i - j;
01786 if ( j > 0 ) {
01787     r = m + j;
01788     if ( r > AT.WorkTop ) {
01789         MLOCK(ErrorMessageLock);
01790         MesWork();
01791         goto EndTest2;
01792     }
01793     do { *--r = *--m; } while ( m > AT.WorkPointer );
01794     AT.WorkPointer = r;
01795     m = AN.EndNest;
01796     r = m + j;
01797     stop = AT.NestPoin->argsize+(AT.NestPoin->argsize);
01798     do { *--r = *--m; } while ( m >= stop );
01799 }
01800 else if ( j < 0 ) {
01801     m = AT.NestPoin->argsize+(AT.NestPoin->argsize);
01802     r = m + j;
01803     do { *r++ = *m++; } while ( m < AN.EndNest );
01804 }
01805 m = AT.NestPoin->argsize;
01806 r = AT.WorkPointer;
01807 while ( --i >= 0 ) *m++ = *r++;
01808 n = AT.Nest;

```

```

01809         while ( n <= AT.NestPoin ) {
01810             if ( *(n->argsize) > 0 && n != AT.NestPoin )
01811                 *(n->argsize) += j;
01812             *(n->funsize) += j;
01813             *(n->termsize) += j;
01814             n++;
01815         }
01816         AN.EndNest += j;
01817         (AT.NestPoin->argsize)[1] = 0; /*
01818         if ( funnum == DENOMINATOR || funnum == EXPONENT ) {
01819             if ( Normalize(BHEAD term) ) {
01820                 /*
01821                     In this case something has been substituted
01822                     Either a $ or a replace_????
01823                     Originally we had here:
01824
01825                     goto EndTest;
01826
01827                     It seems better to restart.
01828                 */
01829                 AN.ncmod = oldncmod;
01830                 goto ReStart;
01831             }
01832             /*
01833                 And size changes here????
01834             */
01835         }
01836         AN.ncmod = oldncmod;
01837         goto ReStart;
01838     }
01839     else if ( *t == -DOLLAREXPRESSION ) {
01840         if ( ( *t1 == TERMSINEXPR || *t1 == SIZEOFFUNCTION )
01841             && t1[1] == FUNHEAD+2 ) {}
01842         else {
01843             if ( AR.Eside != LHSIDE ) {
01844                 AN.TeInFun = 1; AR.TePos = 0;
01845                 AT.TMbuff = AM.dbufnum; t1[2] |= DIRTYFLAG;
01846                 AN.ncmod = oldncmod;
01847                 DONE(1)
01848             }
01849             AC.lhdollarflag = 1;
01850         }
01851     }
01852     else if ( *t == -TERMSINBRACKET ) {
01853         if ( AR.Eside != LHSIDE ) {
01854             AN.TeInFun = 1; AR.TePos = 0;
01855             t1[2] |= DIRTYFLAG;
01856             AN.ncmod = oldncmod;
01857             DONE(1)
01858         }
01859     }
01860     else if ( AN.ncmod != 0 && *t == -SNUMBER ) {
01861         if ( AN.ncmod == 1 || AN.ncmod == -1 ) {
01862             isp = (UWORD)(AC.cmod[0]);
01863             isp = t[1] % isp;
01864             if ( ( AC.modmode & POSNEG ) != 0 ) {
01865                 if ( isp > (UWORD)(AC.cmod[0])/2 ) isp = isp - (UWORD)(AC.cmod[0]);
01866                 else if ( -isp > (UWORD)(AC.cmod[0])/2 ) isp = isp +
(UWORD)(AC.cmod[0]);
01867             }
01868             else {
01869                 if ( isp < 0 ) isp += (UWORD)(AC.cmod[0]);
01870             }
01871             if ( isp <= MAXPOSITIVE && isp >= -MAXPOSITIVE ) {
01872                 t[1] = isp;
01873             }
01874         }
01875     }
01876     NEXTARG(t)
01877 }
01878 if ( funnum >= FUNCTION && functions[funnum-FUNCTION].tabl ) {
01879     /*
01880         Test whether the table catches
01881         Test 1: index arguments and range. i will be the number
01882         of the element in the table.
01883     */
01884     WORD rhsnumber, *oldwork = AT.WorkPointer;
01885     WORD ii, *p, *pp, *ppstop;
01886     MINMAX *mm;
01887     T = functions[funnum-FUNCTION].tabl;
01888     /*
01889         Because of tables with a variable number of indices
01890         we need to make a copy of the pattern.
01891         If we do this in the Workspace we get problems with EndNest.
01892         This is why we use TermMalloc.
01893         Now Tpattern is a copy that can be modified.
01894     */

```

```

01895 #ifdef WITHPTHREADS
01896     pp = T->pattern[AT.identity];
01897 #else
01898     pp = T->pattern;
01899 #endif
01900     if ( Tpattern == 0 ) Tpattern = TermMalloc("Tpattern");
01901     p = Tpattern;
01902     ii = pp[1];
01903     for ( i = 0; i < ii; i++ ) *p++ = *pp++;
01904
01905     p = Tpattern + FUNHEAD+1;
01906     mm = T->mm;
01907     if ( T->sparse ) {
01908         WORD xx;
01909         t = t1+FUNHEAD;
01910         if ( T->numind == 0 ) { isp = 0; xx = 0; }
01911         else {
01912             if ( T->numind < 0 ) {
01913                 if ( *t != -SNUMBER && t[2] != -SNUMBER ) {
01914                     xx = ABS(T->numind);
01915                     goto teststrict;
01916                 }
01917                 xx = t[1]+1;
01918                 if ( xx < 2 || xx > -T->numind ) goto teststrict;
01919             }
01920             else xx = T->numind;
01921             for ( i = 0; i < xx; i++, t += 2 ) {
01922                 if ( *t != -SNUMBER ) break;
01923             }
01924             if ( i < xx ) goto teststrict;
01925             isp = FindTableTree(T,t1+FUNHEAD,2);
01926         }
01927         if ( isp < 0 ) {
01928 teststrict:
01929             if ( T->strict == -2 ) {
01930                 rhsnumber = AM.zerorhs;
01931                 tbufnum = AM.zbufnum;
01932             }
01933             else if ( T->strict == -3 ) {
01934                 rhsnumber = AM.onerhs;
01935                 tbufnum = AM.zbufnum;
01936             }
01937             else if ( T->strict < 0 ) goto NextFun;
01938             else {
01939                 MLOCK(ErrorMessageLock);
01940                 MesPrint("Element in table is undefined");
01941                 if ( Tpattern ) {
01942                     TermFree(Tpattern,"Tpattern");
01943                     Tpattern = 0;
01944                 }
01945                 goto showtable;
01946             }
01947             Copy the indices;
01948             t = t1+FUNHEAD+1;
01949             for ( i = 0; i < xx; i++ ) {
01950                 *p = *t; p+=2; t+=2;
01951             }
01952         }
01953         else {
01954             rhsnumber = T->tablepointers[isp+ABS(T->numind)];
01955             tbufnum = T->bbufnum;
01956             if ( TABLEEXTENSION == 2 )
01957                 tbufnum = T->bbufnum;
01958             else
01959                 tbufnum = T->tablepointers[isp+ABS(T->numind)+1];
01960         }
01961         t = t1+FUNHEAD+1;
01962         ii = xx;
01963         while ( --ii >= 0 ) {
01964             *p = *t; t += 2; p += 2;
01965         }
01966     }
01967     if ( xx < ABS(T->numind) ) {
01968         p--; ppstop = Tpattern+Tpattern[1];
01969         pp = p+2*(-T->numind-xx);
01970         while ( pp < ppstop ) *p++ = *pp++;
01971         Tpattern[1] = p - Tpattern;
01972     }
01973     goto caughttable;
01974 }
01975 else {
01976     i = 0;
01977     t = t1 + FUNHEAD;
01978     j = T->numind;
01979     while ( --j >= 0 ) {
01980         if ( *t != -SNUMBER ) goto NextFun;
01981         t++;

```

```

01982         if ( *t < mm->mini || *t > mm->maxi ) {
01983             if ( T->bounds ) {
01984                 MLOCK(ErrorMessageLock);
01985                 MesPrint("Table boundary check. Argument %d",
01986                     T->numind-j);
01987 showtable:
01988                 AO.OutFill = AO.OutputLine = (UBYTE *)m;
01989                 AO.OutSkip = 8;
01990                 IniLine(0);
01991                 WriteSubTerm(tl,1);
01992                 FiniLine();
01993                 MUNLOCK(ErrorMessageLock);
01994                 if ( Tpattern ) {
01995                     TermFree(Tpattern,"Tpattern");
01996                     Tpattern = 0;
01997                 }
01998                 SETERROR(-1)
01999             }
02000             if ( Tpattern ) {
02001                 TermFree(Tpattern,"Tpattern");
02002                 Tpattern = 0;
02003             }
02004             goto NextFun;
02005         }
02006         i += ( *t - mm->mini ) * (LONG)(mm->size);
02007         *p = *t++;
02008         p += 2;
02009         mm++;
02010     }
02011
02012     /*
02013     Test now whether the entry exists.
02014     */
02015     i *= TABLEEXTENSION;
02016     if ( T->tablepointers[i] == -1 ) {
02017         if ( T->strict == -2 ) {
02018             rhsnumber = AM.zerorhs;
02019             tbufnum = AM.zbufnum;
02020         }
02021         else if ( T->strict == -3 ) {
02022             rhsnumber = AM.onerhs;
02023             tbufnum = AM.zbufnum;
02024         }
02025         else if ( T->strict < 0 ) {
02026             if ( Tpattern ) {
02027                 TermFree(Tpattern,"Tpattern");
02028                 Tpattern = 0;
02029             }
02030             goto NextFun;
02031         }
02032         else {
02033             MLOCK(ErrorMessageLock);
02034             MesPrint("Element in table is undefined");
02035             if ( Tpattern ) {
02036                 TermFree(Tpattern,"Tpattern");
02037                 Tpattern = 0;
02038             }
02039             goto showtable;
02040         }
02041     }
02042     else {
02043         rhsnumber = T->tablepointers[i];
02044         tbufnum = T->bufnum;
02045         tbufnum = T->tablepointers[i+1];
02046     }
02047 }
02048
02049 /*
02050 If there are more arguments we have to do some
02051 pattern matching. This should be easy. We adapted the
02052 pattern, so that the array indices match already.
02053 Note that if there is no match the program will become
02054 very slow.
02055 */
02056 caughttable:
02057 #ifdef WITHPTHREADS
02058     AN.FullProto = T->prototype[AT.identity];
02059 #else
02060     AN.FullProto = T->prototype;
02061 #endif
02062     AN.WildValue = AN.FullProto + SUBEXPSIZE;
02063     AN.WildStop = AN.FullProto+AN.FullProto[1];
02064     ClearWild(BHEAD0);
02065     AN.RepFunNum = 0;
02066     AN.RepFunList = AN.EndNest;
02067     AT.WorkPointer = (WORD *)(((UBYTE *) (AN.EndNest)) + AM.MaxTer/2);
02068     if ( AT.WorkPointer >= AT.WorkTop ) {

```



```

02069         MLOCK(ErrorMessageLock);
02070         MesWork();
02071         MUNLOCK(ErrorMessageLock);
02072     }
02073     wilds = 0;
02074     if ( MatchFunction(BHEAD Tpattern,t1,&wilds) > 0 ) {
02075         AT.WorkPointer = oldwork;
02076         if ( AT.NestPoin != AT.Nest ) {
02077             AN.ncmod = oldncmod;
02078             if ( Tpattern ) {
02079                 TermFree(Tpattern,"Tpattern");
02080                 Tpattern = 0;
02081             }
02082             DONE(1)
02083         }
02084
02085         m = AN.FullProto;
02086         retvalue = m[2] = rhsnumber;
02087         m[4] = tbufnum;
02088         t = t1;
02089         j = t[1];
02090         i = m[1];
02091         if ( j > i ) {
02092             j = i - j;
02093             NCOPY(t,m,i);
02094             m = term + *term;
02095             while ( r < m ) *t++ = *r++;
02096             *term += j;
02097         }
02098         else if ( j < i ) {
02099             j = i-j;
02100             t = term + *term;
02101             while ( t >= r ) { t[j] = *t; t--; }
02102             t = t1;
02103             NCOPY(t,m,i);
02104             *term += j;
02105         }
02106         else {
02107             NCOPY(t,m,j);
02108         }
02109         AN.TeInFun = 0;
02110         AR.TePos = 0;
02111         AN.TeSuOut = -1;
02112         if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
02113         AT.TMbuff = tbufnum;
02114         AN.ncmod = oldncmod;
02115         DONE(retvalue);
02116     }
02117     AT.WorkPointer = oldwork;
02118     if ( Tpattern ) {
02119         TermFree(Tpattern,"Tpattern");
02120         Tpattern = 0;
02121     }
02122 }
02123 NextFun::
02124     }
02125     else if ( ( t[2] & DIRTYFLAG ) != 0 ) {
02126         t += FUNHEAD;
02127         while ( t < r ) {
02128             if ( *t == FUNNYDOLLAR ) {
02129                 if ( AR.Eside != LHSIDE ) {
02130                     AN.TeInFun = 1;
02131                     AR.TePos = 0;
02132                     AT.TMbuff = AM.dbufnum;
02133                     AN.ncmod = oldncmod;
02134                     DONE(1)
02135                 }
02136                 AC.lhdollarflag = 1;
02137             }
02138             t++;
02139         }
02140     }
02141     t = r;
02142     AN.ncmod = oldncmod;
02143     } while ( t < m );
02144 }
02145 Done:
02146     if ( Tpattern ) {
02147         TermFree(Tpattern,"Tpattern");
02148         Tpattern = 0;
02149     }
02150     return(retvalue);
02151 EndTest::
02152     MLOCK(ErrorMessageLock);
02153 EndTest2:
02154     MesCall("TestSub");
02155     MUNLOCK(ErrorMessageLock);

```

```

02156     SETERROR(-1)
02157 }
02158
02159 /*
02160     #] TestSub :
02161     #[ InFunction :          WORD InFunction(term,termout)
02162 */
02175 int InFunction(PHEAD WORD *term, WORD *termout)
02176 {
02177     GETBIDENTITY
02178     WORD *m, *t, *r, *rr, sign = 1, oldncmod;
02179     WORD *u, *v, *w, *from, *to,
02180     ipp, olddefer = AR.DeferFlag, oldPolyFun = AR.PolyFun, i, j;
02181     LONG numterms;
02182     from = t = term;
02183     r = t + *t - 1;
02184     m = r - ABS(*r) + 1;
02185     t++;
02186     while ( t < m ) {
02187         if ( *t >= FUNCTION+WILDOFFSET ) ipp = *t - WILDOFFSET;
02188         else ipp = *t;
02189         if ( AR.TePos ) {
02190             if ( ( term + AR.TePos ) == t ) {
02191                 m = termout;
02192                 while ( from < t ) *m++ = *from++;
02193                 *m++ = DENOMINATOR;
02194                 *m++ = t[1] + 4 + FUNHEAD + ARGHEAD;
02195                 *m++ = DIRTYFLAG;
02196                 FILLFUN3(m)
02197                 *m++ = t[1] + 4 + ARGHEAD;
02198                 *m++ = 1;
02199                 FILLARG(m)
02200                 *m++ = t[1] + 4;
02201                 t[3] = -t[3];
02202                 v = t + t[1];
02203                 while ( t < v ) *m++ = *t++;
02204                 from[3] = -from[3];
02205                 *m++ = 1;
02206                 *m++ = 1;
02207                 *m++ = 3;
02208                 r = term + *term;
02209                 while ( t < r ) *m++ = *t++;
02210                 if ( (m-termout) > (LONG)(AM.MaxTer/sizeof(WORD)) ) {
02211                     MLOCK(ErrorMessageLock);
02212                     MesPrint("Output term too large (%d words) (MaxTermSize: %d words)", m-termout,
02213                     AM.MaxTer/sizeof(WORD));
02214                     MUNLOCK(ErrorMessageLock);
02215                     goto TooLarge;
02216                 }
02217                 *termout = WORDDIF(m,termout);
02218                 return(0);
02219             }
02220             else if ( ( *t >= FUNCTION && functions[ipp-FUNCTION].spec <= 0 )
02221             && ( t[2] & DIRTYFLAG ) == DIRTYFLAG ) {
02222                 m = termout;
02223                 r = t + t[1];
02224                 u = t;
02225                 t += FUNHEAD;
02226                 oldncmod = AN.ncmod;
02227                 while ( t < r ) { /* t points at an argument */
02228                     if ( *t > 0 && t[1] ) { /* Argument has been modified */
02229                         WORD oldsorttype = AR.SortType;
02230                         /* This whole argument must be redone */
02231
02232                         if ( ( AN.ncmod != 0 )
02233                             && ( ( AC.modmode & ALSOFUNARGS ) == 0 )
02234                             && ( *u != AR.PolyFun ) ) { AN.ncmod = 0; }
02235                         AR.DeferFlag = 0;
02236                         v = t + *t;
02237                         t += ARGHEAD; /* First term */
02238                         w = 0; /* to appease the compilers warning devices */
02239                         while ( from < t ) {
02240                             if ( from == u ) w = m;
02241                             *m++ = *from++;
02242                         }
02243                         to = m;
02244                         NewSort(BHEAD0);
02245                         if ( *u == AR.PolyFun && AR.PolyFunType == 2 ) {
02246                             AR.CompareRoutine = (COMPAREDDUMMY)(&CompareSymbols);
02247                             AR.SortType = SORTHIGHFIRST;
02248                         }
02249                     }
02250                     AR.PolyFun = 0;
02251                 }
02252                 while ( t < v ) {
02253                     i = *t;

```

```

02254         NCOPY(m,t,i);
02255         m = to;
02256         if ( AT.WorkPointer < m+m ) AT.WorkPointer = m + *m;
02257         if ( Generator(BHEAD m,AR.Cnumlhs) ) {
02258             AN.ncmod = oldncmod;
02259             LowerSortLevel(); goto InFunc;
02260         }
02261     }
02262     /* w = the function */
02263     /* v = the next argument */
02264     /* u = the function */
02265     /* to is new argument */
02266
02267     to -= ARGHEAD;
02268     if ( EndSort(BHEAD m,1) < 0 ) {
02269         AN.ncmod = oldncmod;
02270         goto InFunc;
02271     }
02272     AR.PolyFun = oldPolyFun;
02273     if ( *u == AR.PolyFun && AR.PolyFunType == 2 ) {
02274         AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
02275         AR.SortType = oldsortttype;
02276     }
02277     while ( *m ) m += *m;
02278     *to = WORDDIF(m,to);
02279     to[1] = 1; /* ??????? or rather 0?. 24-mar-2006 JV */
02280     if ( ToFast(to,to) ) {
02281         if ( *to <= -FUNCTION ) m = to+1;
02282         else m = to+2;
02283     }
02284     w[1] = WORDDIF(m,w) + WORDDIF(r,v);
02285     r = term + *term;
02286     t = v;
02287     while ( t < r ) *m++ = *t++;
02288     if ( (m-termout) > (LONG)(AM.MaxTer/sizeof(WORD)) ) {
02289         MLOCK(ErrorMessageLock);
02290         MesPrint("Output term too large (%d words) (MaxTermSize: %d words)",
m-termout, AM.MaxTer/sizeof(WORD));
02291         MUNLOCK(ErrorMessageLock);
02292         goto TooLarge;
02293     }
02294     *termout = WORDDIF(m,termout);
02295     AR.DeferFlag = olddefer;
02296     AN.ncmod = oldncmod;
02297     return(0);
02298 }
02299 else if ( *t == -DOLLAREXPRESSION ) {
02300     if ( AR.Eside == LHSIDE ) {
02301         NEXTARG(t)
02302         AC.lhdollarflag = 1;
02303     }
02304     else {
02305         /*
02306             This whole argument must be redone
02307         */
02308         DOLLARS d = Dollars + t[1];
02309 #ifdef WITHPTHREADS
02310         int nummodopt, dtype = -1;
02311         if ( AS.MultiThreaded ) {
02312             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02313                 if ( t[1] == ModOptdollars[nummodopt].number ) break;
02314             }
02315             if ( nummodopt < NumModOptdollars ) {
02316                 dtype = ModOptdollars[nummodopt].type;
02317                 if ( dtype == MODLOCAL ) {
02318                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
02319                 }
02320                 else {
02321                     LOCK(d->pthreadlockread);
02322                 }
02323             }
02324         }
02325 #endif
02326         oldncmod = AN.ncmod;
02327         if ( ( AN.ncmod != 0 )
02328             && ( ( AC.modmode & ALSOFUNARGS ) == 0 )
02329             && ( *u != AR.PolyFun ) ) { AN.ncmod = 0; }
02330         AR.DeferFlag = 0;
02331         v = t + 2;
02332         w = 0; /* to appease the compilers warning devices */
02333         while ( from < t ) {
02334             if ( from == u ) w = m;
02335             *m++ = *from++;
02336         }
02337         to = m;
02338         switch ( d->type ) {
02339             case DOLINDEX:

```

```

02340         if ( d->index >= 0 && d->index < AM.OffsetIndex ) {
02341             *m++ = -SNUMBER; *m++ = d->index;
02342         }
02343         else { *m++ = -INDEX; *m++ = d->index; }
02344         break;
02345     case DOLZERO:
02346         *m++ = -SNUMBER; *m++ = 0; break;
02347     case DOLNUMBER:
02348         if ( d->where[0] == 4 &&
02349             ( d->where[1] & MAXPOSITIVE ) == d->where[1] ) {
02350             *m++ = -SNUMBER;
02351             if ( d->where[3] >= 0 ) *m++ = d->where[1];
02352             else *m++ = -d->where[1];
02353             break;
02354         }
02355         /* fall through */
02356     case DOLTERMS:
02357         /*
02358             Here we have the special case of the PolyRatFun
02359             That function may have a different sort of the
02360             terms in the argument.
02361         */
02362         to = m; r = d->where;
02363         *m++ = 0; *m++ = 1;
02364         FILLARG(m)
02365         while ( *r ) {
02366             i = *r; NCOPY(m,r,i)
02367         }
02368         *to = m-to;
02369         if ( ToFast(to,to) ) {
02370             if ( *to <= -FUNCTION ) m = to+1;
02371             else m = to+2;
02372         }
02373         else if ( *u == AR.PolyFun && AR.PolyFunType == 2 ) {
02374             AR.PolyFun = 0;
02375             NewSort(BHEAD0);
02376             AR.CompareRoutine = (COMPAREDUMMY)(&CompareSymbols);
02377             r = to + ARGHEAD;
02378             while ( r < m ) {
02379                 rr = r; r += *r;
02380                 if ( SymbolNormalize(rr) ) goto InFunc;
02381                 if ( StoreTerm(BHEAD rr) ) {
02382                     AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
02383                     LowerSortLevel();
02384                     Terminate(-1);
02385                 }
02386             }
02387             if ( EndSort(BHEAD to+ARGHEAD,1) < 0 ) goto InFunc;
02388             AR.PolyFun = oldPolyFun;
02389             AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
02390             m = to+ARGHEAD;
02391             if ( *m == 0 ) {
02392                 *to = -SNUMBER;
02393                 to[1] = 0;
02394                 m = to + 2;
02395             }
02396             else {
02397                 while ( *m ) m += *m;
02398                 *t = m - to;
02399                 if ( ToFast(to,to) ) {
02400                     if ( *to <= -FUNCTION ) m = to+1;
02401                     else m = to+2;
02402                 }
02403             }
02404         }
02405         w[1] = w[1] - 2 + (m-to);
02406         break;
02407     case DOLSUBTERM:
02408         to = m; r = d->where;
02409         i = r[1];
02410         *m++ = i+4+ARGHEAD; *m++ = 1;
02411         FILLARG(m)
02412         *m++ = i+4;
02413         while ( --i >= 0 ) *m++ = *r++;
02414         *m++ = 1; *m++ = 1; *m++ = 3;
02415         if ( ToFast(to,to) ) {
02416             if ( *to <= -FUNCTION ) m = to+1;
02417             else m = to+2;
02418         }
02419         w[1] = w[1] - 2 + (m-to);
02420         break;
02421     case DOLARGUMENT:
02422         to = m; r = d->where;
02423         if ( *r > 0 ) {
02424             i = *r - 2;
02425             *m++ = *r++; *m++ = 1; r++;
02426             while ( --i >= 0 ) *m++ = *r++;

```

```

02427     }
02428     else if ( *r <= -FUNCTION ) *m++ = *r++;
02429     else { *m++ = *r++; *m++ = *r++; }
02430     w[1] = w[1] - 2 + (m-to);
02431     break;
02432 case DOLWILDARGS:
02433     to = m; r = d->where;
02434     if ( *r > 0 ) { /* Tensor arguments */
02435         i = *r++;
02436         while ( --i >= 0 ) {
02437             if ( *r < 0 ) {
02438                 *m++ = -VECTOR; *m++ = *r++;
02439             }
02440             else if ( *r >= AM.OffsetIndex ) {
02441                 *m++ = -INDEX; *m++ = *r++;
02442             }
02443             else { *m++ = -SNUMBER; *m++ = *r++; }
02444         }
02445     }
02446     else { /* Regular arguments */
02447         r++;
02448         while ( *r ) {
02449             if ( *r > 0 ) {
02450                 i = *r - 2;
02451                 *m++ = *r++; *m++ = 1; r++;
02452                 while ( --i >= 0 ) *m++ = *r++;
02453             }
02454             else if ( *r <= -FUNCTION ) *m++ = *r++;
02455             else { *m++ = *r++; *m++ = *r++; }
02456         }
02457     }
02458     w[1] = w[1] - 2 + (m-to);
02459     break;
02460 case DOLUNDEFINED:
02461 default:
02462     MLOCK(ErrorMessageLock);
02463     MesPrint("!!!Undefined $-variable: %s!!!",
02464             AC.dollarnames->namebuffer+d->name);
02465     MUNLOCK(ErrorMessageLock);
02466 #ifdef WITHPTHREADS
02467     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
02468 #endif
02469     Terminate(-1);
02470 }
02471 #ifdef WITHPTHREADS
02472     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
02473 #endif
02474     r = term + *term;
02475     t = v;
02476     while ( t < r ) *m++ = *t++;
02477     if ( (m-termout) > (LONG)(AM.MaxTer/sizeof(WORD)) ) {
02478         MLOCK(ErrorMessageLock);
02479         MesPrint("Output term too large (%d words) (MaxTermSize: %d words)",
02480                 m-termout, AM.MaxTer/sizeof(WORD));
02481         MUNLOCK(ErrorMessageLock);
02482         goto TooLarge;
02483     }
02484     *termout = WORDDIFF(m,termout);
02485     AR.DeferFlag = olddefer;
02486     AN.ncmod = oldncmod;
02487     return(0);
02488 }
02489 else if ( *t == -TERMSINBRACKET ) {
02490     if ( AC.ComDefer ) numterms = CountTerms1(BHEAD0);
02491     else numterms = 1;
02492 /*
02493     Compose the output term
02494     First copy the part till this function argument
02495     m points at the output term space
02496     u points at the start of the function
02497     t points at the start of the argument
02498 */
02499     w = 0;
02500     while ( from < t ) {
02501         if ( from == u ) w = m;
02502         *m++ = *from++;
02503     }
02504     if ( ( numterms & MAXPOSITIVE ) == numterms ) {
02505         *m++ = -SNUMBER; *m++ = numterms & MAXPOSITIVE;
02506         w[1] += 1;
02507     }
02508     else if ( ( i = numterms » BITSINWORD ) == 0 ) {
02509         *m++ = ARGHEAD+4;
02510         for ( j = 1; j < ARGHEAD; j++ ) *m++ = 0;
02511         *m++ = 4; *m++ = numterms & WORDMASK; *m++ = 1; *m++ = 3;
02512         w[1] += ARGHEAD+3;

```

```

02513     }
02514     else {
02515         *m++ = ARGHEAD+6;
02516         for ( j = 1; j < ARGHEAD; j++ ) *m++ = 0;
02517         *m++ = 6; *m++ = numterms & WORDMASK;
02518         *m++ = i; *m++ = 1; *m++ = 0; *m++ = 5;
02519         w[1] += ARGHEAD+5;
02520     }
02521     from++; /* Skip our function */
02522     r = term + *term;
02523     while ( from < r ) *m++ = *from++;
02524     if ( (m-termout) > (LONG)(AM.MaxTer/sizeof(WORD)) ) {
02525         MLOCK(ErrorMessageLock);
02526         MesPrint("Output term too large (%d words) (MaxTermSize: %d words)",
m-termout, AM.MaxTer/sizeof(WORD));
02527         MUNLOCK(ErrorMessageLock);
02528         goto TooLarge;
02529     }
02530     *termout = WORDDIF(m,termout);
02531     return(0);
02532 }
02533     else { NEXTARG(t) }
02534 }
02535     t = u;
02536 }
02537     else if ( ( *t >= FUNCTION && functions[ipp-FUNCTION].spec > 0 )
&& ( t[2] & DIRTYFLAG ) == DIRTYFLAG ) { /* Could be FUNNYDOLLAR */
02538         u = t; v = t + t[1];
02539         t += FUNHEAD;
02540         while ( t < v ) {
02541             if ( *t == FUNNYDOLLAR ) {
02542                 if ( AR.Eside != LHSIDE ) {
02543                     DOLLARS d = Dollars + t[1];
02544 #ifdef WITHPTHREADS
02545                     int nummodopt, dtype = -1;
02546                     if ( AS.MultiThreaded ) {
02547                         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02548                             if ( t[1] == ModOptdollars[nummodopt].number ) break;
02549                         }
02550                         if ( nummodopt < NumModOptdollars ) {
02551                             dtype = ModOptdollars[nummodopt].type;
02552                             if ( dtype == MODLOCAL ) {
02553                                 d = ModOptdollars[nummodopt].dstruct+AT.identity;
02554                             }
02555                             else {
02556                                 LOCK(d->pthreadslackread);
02557                             }
02558                         }
02559                     }
02560 #endif
02561                     oldncmod = AN.ncmod;
02562                     if ( ( AN.ncmod != 0 )
&& ( ( AC.modmode & ALSOFUNARGS ) == 0 )
&& ( *u != AR.PolyFun ) ) { AN.ncmod = 0; }
02563                     m = termout; w = 0;
02564                     while ( from < t ) {
02565                         if ( from == u ) w = m;
02566                         *m++ = *from++;
02567                     }
02568                     to = m;
02569                     switch ( d->type ) {
02570                         case DOLINDEX:
02571                             *m++ = d->index; break;
02572                         case DOLZERO:
02573                             *m++ = 0; break;
02574                         case DOLNUMBER:
02575                         case DOLTERMS:
02576                             if ( d->where[0] == 4 && d->where[4] == 0
&& d->where[3] == 3 && d->where[2] == 1
&& d->where[1] < AM.OffsetIndex ) {
02577                                 *m++ = d->where[1];
02578                             }
02579                             else {
02580                                 wrongtype;;
02581 #ifdef WITHPTHREADS
02582                                 if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadslackread); }
02583 #endif
02584                                 MLOCK(ErrorMessageLock);
02585                                 MesPrint("%s has wrong type for tensor substitution",
AC.dollarnames->namebuffer+d->name);
02586                                 MUNLOCK(ErrorMessageLock);
02587                                 AN.ncmod = oldncmod;
02588                                 return(-1);
02589                             }
02590                         break;
02591                         case DOLARGUMENT:
02592                             if ( d->where[0] == -INDEX ) {

```

```

02599         *m++ = d->where[1]; break;
02600     }
02601     else if ( d->where[0] == -VECTOR ) {
02602         *m++ = d->where[1]; break;
02603     }
02604     else if ( d->where[0] == -MINVECTOR ) {
02605         *m++ = d->where[1];
02606         sign = -sign;
02607         break;
02608     }
02609     else if ( d->where[0] == -SNUMBER ) {
02610         if ( d->where[1] >= 0
02611             && d->where[1] < AM.OffsetIndex ) {
02612             *m++ = d->where[1]; break;
02613         }
02614     }
02615     goto wrongtype;
02616 case DOLWILDARGS:
02617     if ( d->where[0] > 0 ) {
02618         r = d->where; i = *r++;
02619         while ( --i >= 0 ) *m++ = *r++;
02620     }
02621     else {
02622         r = d->where + 1;
02623         while ( *r ) {
02624             if ( *r == -INDEX ) {
02625                 *m++ = r[1]; r += 2; continue;
02626             }
02627             else if ( *r == -VECTOR ) {
02628                 *m++ = r[1]; r += 2; continue;
02629             }
02630             else if ( *r == -MINVECTOR ) {
02631                 *m++ = r[1]; r += 2;
02632                 sign = -sign; continue;
02633             }
02634             else if ( *r == -SNUMBER ) {
02635                 if ( r[1] >= 0
02636                     && r[1] < AM.OffsetIndex ) {
02637                     *m++ = r[1]; r += 2; continue;
02638                 }
02639             }
02640             goto wrongtype;
02641         }
02642     }
02643     break;
02644 case DOLSUBTERM:
02645     r = d->where;
02646     if ( *r == INDEX && r[1] == 3 ) {
02647         *m++ = r[2];
02648     }
02649     else goto wrongtype;
02650     break;
02651 case DOLUNDEFINED:
02652     #ifdef WITHPTHREADS
02653         if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
02654     #endif
02655     MLOCK(ErrorMessageLock);
02656     MesPrint("%s is undefined in tensor substitution",
02657             AC.dollarnames->namebuffer+d->name);
02658     MUNLOCK(ErrorMessageLock);
02659     AN.ncmod = oldncmod;
02660     return(-1);
02661 }
02662 #ifdef WITHPTHREADS
02663     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
02664 #endif
02665     w[1] = w[1] - 2 + (m-to);
02666     from += 2;
02667     term += *term;
02668     while ( from < term ) *m++ = *from++;
02669     if ( sign < 0 ) m[-1] = -m[-1];
02670     if ( (m-termout) > (LONG)(AM.MaxTer/sizeof(WORD)) ) {
02671         MLOCK(ErrorMessageLock);
02672         MesPrint("Output term too large (%d words) (MaxTermSize: %d words)",
02673             m-termout, AM.MaxTer/sizeof(WORD));
02674         MUNLOCK(ErrorMessageLock);
02675         goto TooLarge;
02676     }
02677     *termout = m - termout;
02678     AN.ncmod = oldncmod;
02679     return(0);
02680 }
02681 else {
02682     AC.lhdollarflag = 1;
02683 }
02684 t++;

```

```

02685         }
02686         t = u;
02687     }
02688     t += t[1];
02689 }
02690 MLOCK(ErrorMessageLock);
02691 MesPrint("Internal error in InFunction: Function not encountered.");
02692 if ( AM.tracebackflag ) {
02693     MesPrint("%w: AR.TePos = %d",AR.TePos);
02694     MesPrint("%w: AN.TeInFun = %d",AN.TeInFun);
02695     termout = term;
02696     AO.OutFill = AO.OutputLine = (UBYTE *)AT.WorkPointer + AM.MaxTer;
02697     AO.OutSkip = 3;
02698     FiniLine();
02699     i = *termout;
02700     while ( --i >= 0 ) {
02701         TalToLine((UWORD) (*termout++));
02702         TokenToLine((UBYTE *) " ");
02703     }
02704     AO.OutSkip = 0;
02705     FiniLine();
02706     MesCall("InFunction");
02707 }
02708 MUNLOCK(ErrorMessageLock);
02709 return(1);
02710
02711 InFunc:
02712     MLOCK(ErrorMessageLock);
02713     MesCall("InFunction");
02714     MUNLOCK(ErrorMessageLock);
02715     SETERROR(-1)
02716
02717 TooLarge:
02718     MLOCK(ErrorMessageLock);
02719     MesCall("InFunction");
02720     MUNLOCK(ErrorMessageLock);
02721     SETERROR(-1)
02722 }
02723
02724 /*
02725     #] InFunction :
02726     #[ InsertTerm :          WORD InsertTerm(term,replac,extractbuff,position,termout)
02727 */
02745 int InsertTerm(PHEAD WORD *term, WORD replac, WORD extractbuff, WORD *position, WORD *termout,
02746                WORD tepos)
02747 {
02748     GETBIDENTITY
02749     WORD *m, *t, *r, i, l2, j;
02750     WORD *u, *v, ll, *coef;
02751     coef = AT.WorkPointer;
02752     if ( ( AT.WorkPointer = coef + 2*AM.MaxTal ) > AT.WorkTop ) {
02753         MLOCK(ErrorMessageLock);
02754         MesWork();
02755         MUNLOCK(ErrorMessageLock);
02756         return(-1);
02757     }
02758     t = term;
02759     r = t + *t;
02760     ll = l2 = r[-1];
02761     m = r - ABS(l2);
02762     if ( tepos > 0 ) {
02763         t = term + tepos;
02764         goto foundit;
02765     }
02766     t++;
02767     while ( t < m ) {
02768         if ( *t == SUBEXPRESSION && t[2] == replac && t[3] && t[4] == extractbuff ) {
02769             r = t + t[1];
02770             while ( *r == SUBEXPRESSION && r[2] == replac && r[3] && r < m && r[4] == extractbuff ) {
02771                 t = r; r += r[1];
02772             }
02773             foundit;;
02774             u = m;
02775             r = term;
02776             m = termout;
02777             do { *m++ = *r++; } while ( r < t );
02778             if ( t[1] > SUBEXPSIZE ) {
02779                 /*
02780                     if this is a dollar expression there are no wildcards
02781                 */
02782                 i = *--m;
02783                 if ( ( l2 = WildFill(BHEAD m,position,t) ) < 0 ) goto InsCall;
02784                 *m = i;
02785                 m += l2-1;
02786                 l2 = *m;
02787                 i = ( j = ABS(l2) ) - 1;
02788                 r = coef + i;

```



```

02789         do { *--r = *--m; } while ( --i > 0 );
02790     }
02791     else {
02792         v = t;
02793         t = position;
02794         r = t + *t;
02795         l2 = r[-1];
02796         r -= ( j = ABS(l2) );
02797         t++;
02798         if ( t < r ) do { *m++ = *t++; } while ( t < r );
02799         t = v;
02800     }
02801     t += t[1];
02802     while ( t < u && *t == DOLLAREXPR2 ) t += t[1];
02803 ComAct: if ( t < u ) do { *m++ = *t++; } while ( t < u );
02804     if ( *r == 1 && r[1] == 1 && j == 3 ) {
02805         if ( l2 < 0 ) l1 = -l1;
02806         i = ABS(l1)-1;
02807         NCOPY(m,t,i);
02808         *m++ = l1;
02809     }
02810     else {
02811         if ( MulRat(BHEAD (UWORD *)u,REDLENG(l1), (UWORD *)r,REDLENG(l2),
02812             (UWORD *)m,&l1) ) goto InsCall;
02813         l2 = l1;
02814         l2 *= 2;
02815         if ( l2 < 0 ) {
02816             m -= l2;
02817             *m++ = l2-1;
02818         }
02819         else {
02820             m += l2;
02821             *m++ = l2+1;
02822         }
02823     }
02824     *termout = WORDDIFF(m,termout);
02825     if ( (*termout)*((LONG)sizeof(WORD)) > AM.MaxTer ) {
02826         MLOCK(ErrorMessageLock);
02827         MesPrint("Term too complex during substitution (%d words). MaxTermSize (%l words) is
too small.", *termout, AM.MaxTer/(LONG)sizeof(WORD) );
02828         goto InsCall2;
02829     }
02830     AT.WorkPointer = coef;
02831     return(0);
02832 }
02833 t += t[1];
02834 }
02835 /*
02836 The next action is for when there is no subexpression pointer.
02837 We append the extra term. Effectively the routine becomes now a
02838 merge routine for two terms.
02839 */
02840 v = t;
02841 u = m;
02842 r = term;
02843 m = termout;
02844 do { *m++ = *r++; } while ( r < t );
02845 t = position;
02846 r = t + *t;
02847 l2 = r[-1];
02848 r -= ( j = ABS(l2) );
02849 t++;
02850 if ( t < r ) do { *m++ = *t++; } while ( t < r );
02851 t = v;
02852 goto ComAct;
02853
02854 InsCall:
02855     MLOCK(ErrorMessageLock);
02856 InsCall2:
02857     MesCall("InsertTerm");
02858     MUNLOCK(ErrorMessageLock);
02859     SETERROR(-1)
02860 }
02861
02862 /*
02863 #] InsertTerm :
02864 #[ PasteFile :          WORD PasteFile(num,acc,pos,accf,renum,freeze,nexpr)
02865 */
02881 LONG PasteFile(PHEAD WORD number, WORD *accum, POSITION *position, WORD **accfill,
02882     RENUMBER renumber, WORD *freeze, WORD nexpr)
02883 {
02884     GETBIDENTITY
02885     WORD *r, l, *m, i;
02886     WORD *stop, *s1, *s2;
02887 /* POSITION AccPos; bug 12-apr-2008 JV */
02888     WORD InCompState;
02889     WORD *oldipointer;

```

```

02890     LONG retlength;
02891     stop = (WORD *) ((UBYTE *) (accum)) + 2*AM.MaxTer;
02892     *accum++ = number;
02893     while ( --number >= 0 ) accum += *accum;
02894     if ( freeze ) {
02895 /*      AccPos = *position; bug 12-apr-2008 JV */
02896         oldipointer = AR.CompressPointer;
02897         do {
02898             AR.CompressPointer = oldipointer;
02899 /*      if ( ( l = GetFromStore(accum,&AccPos,renumber,&InCompState,nexpr) ) < 0 ) bug 12-apr-2008
JV */
02900             if ( ( l = GetFromStore(accum,position,renumber,&InCompState,nexpr) ) < 0 )
02901                 goto PasErr;
02902             if ( !l ) { *accum = 0; return(0); }
02903             r = accum;
02904             m = r + *r;
02905             m -= ABS(m[-1]);
02906             r++;
02907             while ( r < m && *r != HAAKJE ) r += r[1];
02908             if ( r >= m ) {
02909                 if ( *freeze != 4 ) l = -1;
02910             }
02911             else {
02912 /*
02913                 The algorithm for accepting terms with a given (freeze)
02914                 representation outside brackets is rather crude. A refinement
02915                 would be to store the part outside the bracket and skip the
02916                 term when this part doesn't alter (and is unacceptable).
02917                 Once accepting one can keep accepting till the bracket alters
02918                 and then one may stop the generation. It is necessary to
02919                 set up a struct to remember the bracket and the progress
02920                 status.
02921 */
02922                 m = AT.WorkPointer;
02923                 s2 = r;
02924                 r = accum;
02925                 *m++ = WORDDIF(s2,r) + 3;
02926                 r++;
02927                 while ( r < s2 ) *m++ = *r++;
02928                 *m++ = 1; *m++ = 1; *m++ = 3;
02929                 m = AT.WorkPointer;
02930                 if ( Normalize(BHEAD AT.WorkPointer) ) goto PasErr;
02931                 r = freeze;
02932                 i = *m;
02933                 while ( --i >= 0 && *m++ == *r++ ) {}
02934                 if ( i > 0 ) {
02935                     l = -1;
02936                 }
02937                 else { /* Term to be accepted */
02938                     r = accum;
02939                     s1 = r + *r;
02940                     r++;
02941                     m = s2;
02942                     m += m[1];
02943                     do { *r++ = *m++; } while ( m < s1 );
02944                     *accum = 1 = WORDDIF(r,accum);
02945                 }
02946             }
02947         } while ( l < 0 );
02948         retlength = InCompState;
02949 /*      retlength = DIFBASE(AccPos,*position) / sizeof(WORD); bug 12-apr-2008 JV */
02950     }
02951     else {
02952         if ( ( l = GetFromStore(accum,position,renumber,&InCompState,nexpr) ) < 0 ) {
02953             MLOCK(ErrorMessageLock);
02954             MesCall("PasteFile");
02955             MUNLOCK(ErrorMessageLock);
02956             SETERROR(-1)
02957         }
02958         if ( l == 0 ) { *accum = 0; return(0); }
02959         retlength = InCompState;
02960     }
02961     accum += 1;
02962     if ( accum > stop ) {
02963         MLOCK(ErrorMessageLock);
02964         MesPrint("Buffer too small in PasteFile");
02965         MUNLOCK(ErrorMessageLock);
02966         SETERROR(-1)
02967     }
02968     *accum = 0;
02969     *accfill = accum;
02970     return(retlength);
02971 PasErr:
02972     MLOCK(ErrorMessageLock);
02973     MesCall("PasteFile");
02974     MUNLOCK(ErrorMessageLock);
02975     SETERROR(-1)

```

```

02976 }
02977
02978 /*
02979     #] PasteFile :
02980     #[ PasteTerm :          WORD PasteTerm(number,accum,position,times,divby)
02981 */
03003 WORD *PasteTerm(PHEAD WORD number, WORD *accum, WORD *position, WORD times, WORD divby)
03004 {
03005     GETBIDENTITY
03006     WORD *t, *r, x, y, z;
03007     WORD *m, *u, ll, a[2];
03008     m = (WORD *)(((UBYTE *) (accum)) + AM.MaxTer);
03009     /* m = (WORD *)(((UBYTE *) (accum)) + 2*AM.MaxTer); */
03010     *accum++ = number;
03011     while ( --number >= 0 ) accum += *accum;
03012     if ( times == divby ) {
03013         t = position;
03014         r = t + *t;
03015         if ( t < r ) do { *accum++ = *t++; } while ( t < r );
03016     }
03017     else {
03018         u = accum;
03019         t = position;
03020         r = t + *t - 1;
03021         ll = *r;
03022         r -= ABS(*r) - 1;
03023         if ( t < r ) do { *accum++ = *t++; } while ( t < r );
03024         if ( divby > times ) { x = divby; y = times; }
03025         else { x = times; y = divby; }
03026         z = x*y;
03027         while ( z ) { x = y; y = z; z = x*y; }
03028         if ( y != 1 ) { divby /= y; times /= y; }
03029         a[1] = divby;
03030         a[0] = times;
03031         if ( MulRat(BHEAD (UWORD *)t,REDLENG(ll),(UWORD *)a,1,(UWORD *)accum,&ll) ) {
03032             MLOCK(ErrorMessageLock);
03033             MesCall("PasteTerm");
03034             MUNLOCK(ErrorMessageLock);
03035             return(0);
03036         }
03037         x = ll;
03038         x *= 2;
03039         if ( x < 0 ) { accum -= x; *accum++ = x - 1; }
03040         else { accum += x; *accum++ = x + 1; }
03041         *u = WORDDIFF(accum,u);
03042     }
03043     if ( accum >= m ) {
03044         MLOCK(ErrorMessageLock);
03045         MesPrint("Buffer too small in PasteTerm");
03046         MUNLOCK(ErrorMessageLock);
03047         return(0);
03048     }
03049     *accum = 0;
03050     return(accum);
03051 }
03052
03053 /*
03054     #] PasteTerm :
03055     #[ FiniTerm :          WORD FiniTerm(term,accum,termout,number)
03056 */
03068 int FiniTerm(PHEAD WORD *term, WORD *accum, WORD *termout, WORD number, WORD tepos)
03069 {
03070     GETBIDENTITY
03071     WORD *m, *t, *r, i, numacc, l2, ipp;
03072     WORD *u, *v, ll, *coef = AT.WorkPointer, *oldaccum;
03073     if ( ( AT.WorkPointer = coef + 2*AM.MaxTal ) > AT.WorkTop ) {
03074         MLOCK(ErrorMessageLock);
03075         MesWork();
03076         MUNLOCK(ErrorMessageLock);
03077         return(-1);
03078     }
03079     oldaccum = accum;
03080     t = term;
03081     m = t + *t - 1;
03082     ll = REDLENG(*m);
03083     i = ABS(*m) - 1;
03084     r = coef + i;
03085     do { *--r = *--m; } while ( --i > 0 ); /* Copies coefficient */
03086     if ( tepos > 0 ) {
03087         t = term + tepos;
03088         goto foundit;
03089     }
03090     t++;
03091     if ( t < m ) do {
03092         if ( ( ( *t == SUBEXPRESSION && ( *(r=t+t[1]) != SUBEXPRESSION
03093             || r >= m || !r[3] ) ) || *t == EXPRESSION ) && t[2] == number && t[3] ) {
03094             foundit::;

```

```

03095         u = m;
03096         r = term;
03097         m = termout;
03098         if ( r < t ) do { *m++ = *r++; } while ( r < t );
03099         numacc = *accum++;
03100         if ( numacc >= 0 ) do {
03101             if ( *t == EXPRESSION ) {
03102                 v = t + t[1];
03103                 r = t + SUBEXPSIZE;
03104                 while ( r < v ) {
03105                     if ( *r == WILDCARDS ) {
03106                         r += 2;
03107                         i = *--m;
03108                         if ( ( l2 = WildFill(BHEAD m,accum,r) ) < 0 ) goto FiniCall;
03109                         goto AllWild;
03110                     }
03111                     r += r[1];
03112                 }
03113                 goto NoWild;
03114             }
03115             else if ( t[1] > SUBEXPSIZE && t[SUBEXPSIZE] != FROMBRAC ) {
03116                 i = *--m;
03117                 if ( ( l2 = WildFill(BHEAD m,accum,t) ) < 0 ) goto FiniCall;
03118 AllWild:
03119                 *m = i;
03120                 m += l2-1;
03121                 l2 = *m;
03122                 m -= ABS(l2) - 1;
03123                 r = m;
03124             }
03125 NoWild:
03126             r = accum;
03127             v = r + *r - 1;
03128             l2 = *v;
03129             v -= ABS(l2) - 1;
03130             r++;
03131             if ( r < v ) do { *m++ = *r++; } while ( r < v );
03132             if ( *r == 1 && r[1] == 1 && ABS(l2) == 3 ) {
03133                 if ( l2 < 0 ) l1 = -l1;
03134             }
03135             else {
03136                 l2 = REDLENG(l2);
03137                 if ( l2 == 0 ) {
03138                     t = oldaccum;
03139                     numacc = *t++;
03140                     AO.OutSkip = 3;
03141                     FiniLine();
03142                     while ( --numacc >= 0 ) {
03143                         i = *t;
03144                         while ( --i >= 0 ) {
03145                             TalToLine((UWORD) (*t++));
03146                             TokenToLine((UBYTE *) " ");
03147                         }
03148                     }
03149                     AO.OutSkip = 0;
03150                     FiniLine();
03151                     goto FiniCall;
03152                 }
03153                 if ( MulRat(BHEAD (UWORD *)coef,l1,(UWORD *)r,l2,(UWORD *)coef,&l1) ) goto
03154 FiniCall;
03155                 if ( AN.ncmod != 0 && TakeModulus((UWORD
03156 *)coef,&l1,AC.cmod,AN.ncmod,UNPACK|AC.modmode) ) goto FiniCall;
03157             }
03158             accum += *accum;
03159             while ( --numacc >= 0 );
03160             if ( *t == SUBEXPRESSION ) {
03161                 while ( t+t[1] < u && t[t[1]] == DOLLAREXP2 ) t += t[1];
03162             }
03163             t += t[1];
03164             if ( t < u ) do { *m++ = *t++; } while ( t < u );
03165             l2 = l1;
03166 /*
03167 Code to economize when taking x = (a+b)/2
03168 */
03169         r = termout+1;
03170         while ( r < m ) {
03171             if ( *r == SUBEXPRESSION ) {
03172                 t = r + r[1];
03173                 l1 = (WORD) (cbuf[r[4]].CanCommu[r[2]]);
03174                 while ( t < m ) {
03175                     if ( *t == SUBEXPRESSION &&
03176                         t[1] == r[1] && t[2] == r[2] && t[4] == r[4] ) {
03177                         i = t[1] - SUBEXPSIZE;
03178                         u = r + SUBEXPSIZE; v = t + SUBEXPSIZE;
03179                         while ( i > 0 ) {
03180                             if ( *v++ != *u++ ) break;
03181                             i--;

```

```

03180                                     }
03181                                     if ( i <= 0 ) {
03182                                         u = r;
03183                                         r[3] += t[3];
03184                                         r = t + t[1];
03185                                         while ( r < m ) *t++ = *r++;
03186                                         m = t;
03187                                         r = u;
03188                                         goto Nexttr;
03189                                     }
03190                                     if ( l1 && cbuf[t[4]].CanCommu[t[2]] ) break;
03191                                     while ( t+t[1] < m && t[t[1]] == DOLLAREXP2 ) t += t[1];
03192                                 }
03193                                 else if ( l1 ) {
03194                                     if ( *t == SUBEXPRESSION && cbuf[t[4]].CanCommu[t[2]] )
03195                                         break;
03196                                     if ( *t >= FUNCTION+WILDOFFSET )
03197                                         ipp = *t - WILDOFFSET;
03198                                     else ipp = *t;
03199                                     if ( *t >= FUNCTION
03200                                         && functions[ipp-FUNCTION].commute && l1 ) break;
03201                                     if ( *t == EXPRESSION ) break;
03202                                 }
03203                                 t += t[1];
03204                             }
03205                             r += r[1];
03206                         }
03207                         else r += r[1];
03208 Nexttr;;
03209                     }
03210
03211                     i = ABS(l2);
03212                     i *= 2;
03213                     i++;
03214                     l2 = ( l2 >= 0 ) ? i: -i;
03215                     r = coef;
03216                     while ( --i > 0 ) *m++ = *r++;
03217                     *m++ = l2;
03218                     *termout = WORDDIF(m,termout);
03219                     AT.WorkPointer = coef;
03220                     return(0);
03221                 }
03222                 t += t[1];
03223             } while ( t < m );
03224             AT.WorkPointer = coef;
03225             return(1);
03226
03227 FiniCall:
03228     MLOCK(ErrorMessageLock);
03229     MesCall("FiniTerm");
03230     MUNLOCK(ErrorMessageLock);
03231     SETERROR(-1)
03232 }
03233
03234 /*
03235     #] FiniTerm :
03236     #[ Generator :          WORD Generator(BHEAD term,level)
03237 */
03238
03239 static WORD zeroDollar[] = { 0, 0 };
03240 /*
03241 static LONG debugcounter = 0;
03242 */
03243
03267 int Generator(PHEAD WORD *term, WORD level)
03268 {
03269     GETBIDENTITY
03270     WORD replac, *accum, *termout, *t, i, j, tepos, applyflag = 0, *StartBuf;
03271     WORD *a, power, powerl, DumNow = AR.CurDum, oldtoprhs, oldatoprhs, extractbuff;
03272     int ret;
03273     int *RepSto = AN.RepPoint, iscopy = 0;
03274     CBUF *C = cbuf+AM.rbufnum, *CC = cbuf + AT.ebufnum, *CCC = cbuf + AT.aebufnum;
03275     LONG posisub, oldcpointer, oldacpointer;
03276     DOLLARS d = 0;
03277     WORD numfac[5], idfunctionflag;
03278 #ifdef WITHPTHREADS
03279     int nummodopt, dtype = -1, id;
03280 #endif
03281     oldtoprhs = CC->numrhs;
03282     oldcpointer = CC->Pointer - CC->Buffer;
03283     oldatoprhs = CCC->numrhs;
03284     oldacpointer = CCC->Pointer - CCC->Buffer;
03285 ReStart:
03286     if ( ( replac = TestSub(BHEAD term,level) ) == 0 ) {
03287         if ( applyflag ) { TableReset(); applyflag = 0; }
03288     /*
03289         if ( AN.PolyNormFlag > 1 ) {

```

```

03290         if ( PolyFunMul(BHEAD term) < 0 ) goto GenCall;
03291         AN.PolyNormFlag = 0;
03292         if ( !*term ) goto Return0;
03293     }
03294     */
03295 Renormalize:
03296     AN.PolyNormFlag = 0;
03297     AN.idfunctionflag = 0;
03298     if ( ( ret = Normalize(BHEAD term) ) != 0 ) {
03299         if ( ret > 0 ) {
03300             if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
03301             goto ReStart;
03302         }
03303         goto GenCall;
03304     }
03305     idfunctionflag = AN.idfunctionflag;
03306     if ( !*term ) { AN.PolyNormFlag = 0; goto Return0; }
03307
03308     if ( AN.PolyNormFlag ) {
03309         if ( AN.PolyFunTodo == 0 ) {
03310             if ( PolyFunMul(BHEAD term) < 0 ) goto GenCall;
03311             if ( !*term ) { AN.PolyNormFlag = 0; goto Return0; }
03312         }
03313         else {
03314             WORD oldPolyFunExp = AR.PolyFunExp;
03315             AR.PolyFunExp = 0;
03316             if ( PolyFunMul(BHEAD term) < 0 ) goto GenCall;
03317             AT.WorkPointer = term+*term;
03318             AR.PolyFunExp = oldPolyFunExp;
03319             if ( !*term ) { AN.PolyNormFlag = 0; goto Return0; }
03320             if ( Normalize(BHEAD term) < 0 ) goto GenCall;
03321             if ( !*term ) { AN.PolyNormFlag = 0; goto Return0; }
03322             AT.WorkPointer = term+*term;
03323             if ( AN.PolyNormFlag ) {
03324                 if ( PolyFunMul(BHEAD term) < 0 ) goto GenCall;
03325                 if ( !*term ) { AN.PolyNormFlag = 0; goto Return0; }
03326                 AT.WorkPointer = term+*term;
03327             }
03328             AN.PolyFunTodo = 0;
03329         }
03330     }
03331     if ( idfunctionflag > 0 ) {
03332         if ( TakeIDfunction(BHEAD term) ) {
03333             AT.WorkPointer = term + *term;
03334             goto ReStart;
03335         }
03336     }
03337     if ( AT.WorkPointer < (WORD *)(((UBYTE *) (term)) + AM.MaxTer) )
03338         AT.WorkPointer = (WORD *)(((UBYTE *) (term)) + AM.MaxTer);
03339     do {
03340 SkipCount: level++;
03341         if ( level > AR.Cnumlhs ) {
03342             if ( AR.DeferFlag && AR.sLevel <= 0 ) {
03343 #ifdef WITHMPI
03344                 if ( PF.me != MASTER && AC.mparallelfld == PARALLELFld && PF.exprtodo < 0 ) {
03345                     if ( PF_Deferred(term,level) ) goto GenCall;
03346                 }
03347             else
03348 #endif
03349                 {
03350                     if ( Deferred(BHEAD term,level) ) goto GenCall;
03351                 }
03352             goto Return0;
03353         }
03354         if ( AN.ncmod != 0 ) {
03355             if ( Modulus(term) ) goto GenCall;
03356             if ( !*term ) goto Return0;
03357         }
03358         if ( AR.CurDum > AM.IndDum && AR.sLevel <= 0 ) {
03359             WORD olddummies = AN.IndDum;
03360             AN.IndDum = AM.IndDum;
03361             ReNumber(BHEAD term);
03362             Normalize(BHEAD term);
03363             AN.IndDum = olddummies;
03364             if ( !*term ) goto Return0;
03365             olddummies = DetCurDum(BHEAD term);
03366             if ( olddummies > AR.MaxDum ) AR.MaxDum = olddummies;
03367         }
03368         if ( AR.PolyFun > 0 && ( AR.sLevel <= 0 || AN.FunSorts[AR.sLevel]->PolyFlag > 0 ) ) {
03369             if ( PrepPoly(BHEAD term,0) != 0 ) goto Return0;
03370         }
03371         else if ( AR.PolyFun > 0 ) {
03372             if ( PrepPoly(BHEAD term,1) != 0 ) goto Return0;
03373         }
03374         if ( AR.sLevel <= 0 && AR.BracketOn ) {
03375             if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
03376             termout = AT.WorkPointer;

```

```

03377         if ( AT.WorkPointer + *term + 3 > AT.WorkTop ) goto OverWork;
03378         if ( PutBracket(BHEAD term) ) return(-1);
03379         AN.RepPoint = RepSto;
03380         *AT.WorkPointer = 0;
03381         ret = StoreTerm(BHEAD termout);
03382         AT.WorkPointer = termout;
03383         CC->numrhs = oldtoprhs;
03384         CC->Pointer = CC->Buffer + oldcpointer;
03385         CCC->numrhs = oldatoprhs;
03386         CCC->Pointer = CCC->Buffer + oldacpointer;
03387         return(ret);
03388     }
03389     else {
03390         if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
03391         if ( AT.WorkPointer >= AT.WorkTop ) goto OverWork;
03392         *AT.WorkPointer = 0;
03393         AN.RepPoint = RepSto;
03394         ret = StoreTerm(BHEAD term);
03395         CC->numrhs = oldtoprhs;
03396         CC->Pointer = CC->Buffer + oldcpointer;
03397         CCC->numrhs = oldatoprhs;
03398         CCC->Pointer = CCC->Buffer + oldacpointer;
03399         return(ret);
03400     }
03401 }
03402 i = C->lhs[level][0];
03403 if ( i >= TYPECOUNT ) {
03404 /*
03405     # [ Special action :
03406 */
03407     switch ( i ) {
03408     case TYPECOUNT:
03409         if ( CountDo(term,C->lhs[level]) < C->lhs[level][2] ) {
03410             AT.WorkPointer = term + *term;
03411             goto Return0;
03412         }
03413         break;
03414     case TYPEMULT:
03415         if ( MultDo(BHEAD term,C->lhs[level]) ) goto GenCall;
03416         goto ReStart;
03417     case TYPEGOTO:
03418         level = AC.Labels[C->lhs[level][2]];
03419         break;
03420     case TYPEDISCARD:
03421         AT.WorkPointer = term + *term;
03422         goto Return0;
03423     case TYPEEIF:
03424 #ifdef WITHPTHREADS
03425         {
03426 /*
03427             We may be writing in the space here when wildcards
03428             are involved in a match(). Hence we have to make
03429             a private copy here!!!!
03430 */
03431             WORD ic, jc, *ifcode, *jfcodes;
03432             jfcodes = C->lhs[level]; jc = jfcodes[1];
03433             ifcode = AT.WorkPointer; AT.WorkPointer += jc;
03434             for ( ic = 0; ic < jc; ic++ ) ifcode[ic] = jfcodes[ic];
03435             while ( !DoIfStatement(BHEAD ifcode,term) ) {
03436                 level = C->lhs[level][2];
03437                 if ( C->lhs[level][0] != TYPEELIF ) break;
03438             }
03439             AT.WorkPointer = ifcode;
03440         }
03441     #else
03442         while ( !DoIfStatement(BHEAD C->lhs[level],term) ) {
03443             level = C->lhs[level][2];
03444             if ( C->lhs[level][0] != TYPEELIF ) break;
03445         }
03446     #endif
03447         break;
03448     case TYPEELIF:
03449         do {
03450             level = C->lhs[level][2];
03451         } while ( C->lhs[level][0] == TYPEELIF );
03452         break;
03453     case TYPEELSE:
03454     case TYPEENDIF:
03455         level = C->lhs[level][2];
03456         break;
03457     case TYPESUMFIX:
03458         {
03459             WORD *cp = AR.CompressPointer, *op = AR.CompressPointer;
03460             WORD *tlhs = C->lhs[level] + 3, *m, *lhs;
03461             WORD theindex = C->lhs[level][2];
03462             if ( theindex < 0 ) { /* $-variable */
03463 #ifdef WITHPTHREADS

```

```

03464         int ddtype = -1;
03465         theindex = -theindex;
03466         d = Dollars + theindex;
03467         if ( AS.MultiThreaded ) {
03468             for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
03469                 if ( theindex == ModOptdollars[nummodopt].number ) break;
03470             }
03471             if ( nummodopt < NumModOptdollars ) {
03472                 ddtype = ModOptdollars[nummodopt].type;
03473                 if ( ddtype == MODLOCAL ) {
03474                     d = ModOptdollars[nummodopt].dstruct+AT.identity;
03475                 }
03476                 else {
03477                     LOCK(d->pthreadlockread);
03478                 }
03479             }
03480         }
03481     #else
03482         theindex = -theindex;
03483         d = Dollars + theindex;
03484     #endif
03485
03486     if ( d->type != DOLINDEX
03487         || d->index < AM.OffsetIndex
03488         || d->index >= AM.OffsetIndex + WILDOffset ) {
03489         MLOCK(ErrorMessageLock);
03490         MesPrint("%s should have been an index"
03491             ,AC.dollarnames->namebuffer+d->name);
03492         AN.currentTerm = term;
03493         MesPrint("Current term: %t");
03494         AN.listinprint = printscratch;
03495         printscratch[0] = DOLLAREXPRESSION;
03496         printscratch[1] = theindex;
03497         MesPrint("$s = %s"
03498             ,AC.dollarnames->namebuffer+d->name);
03499         MUNLOCK(ErrorMessageLock);
03500     #ifdef WITHPTHREADS
03501         if ( ddtype > 0 && ddtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
03502     #endif
03503         goto GenCall;
03504     }
03505     theindex = d->index;
03506     #ifdef WITHPTHREADS
03507         if ( ddtype > 0 && ddtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
03508     #endif
03509 }
03510 cp[1] = SUBEXPSIZE+4;
03511 cp += SUBEXPSIZE;
03512 *cp++ = INDTOIND;
03513 *cp++ = 4;
03514 *cp++ = theindex;
03515 i = C->lhs[level][1] - 3;
03516 cp++;
03517 AR.CompressPointer = cp;
03518 while ( --i >= 0 ) {
03519     cp[-1] = *tlhs++;
03520     termout = AT.WorkPointer;
03521     if ( ( jlhs = WildFill(BHEAD termout,term,op)) < 0 )
03522         goto GenCall;
03523     m = term;
03524     jlhs = *m;
03525     while ( --jlhs >= 0 ) {
03526         if ( *m++ != *termout++ ) break;
03527     }
03528     if ( jlhs >= 0 ) {
03529         termout = AT.WorkPointer;
03530         AT.WorkPointer = termout + *termout;
03531         if ( Generator(BHEAD termout,level) ) goto GenCall;
03532         AT.WorkPointer = termout;
03533     }
03534     else {
03535         AR.CompressPointer = op;
03536         goto SkipCount;
03537     }
03538 }
03539 AR.CompressPointer = op;
03540 goto CommonEnd;
03541 }
03542 case TYPESUM:
03543 {
03544     WORD *wp, *cp = AR.CompressPointer, *op = AR.CompressPointer;
03545     WORD theindex;
03546     WORD *ow;
03547     /*
03548     At this point it is safest to determine CurDum
03549     */
03550     AR.CurDum = DetCurDum(BHEAD term);

```



```

03551         i = C->lhs[level][1]-2;
03552         wp = C->lhs[level] + 2;
03553         cp[1] = SUBEXPSIZE+4*i;
03554         cp += SUBEXPSIZE;
03555         while ( --i >= 0 ) {
03556             theindex = *wp++;
03557             if ( theindex < 0 ) { /* $-variable */
03558 #ifdef WITHPTHREADS
03559                 int ddtype = -1;
03560                 theindex = -theindex;
03561                 d = Dollars + theindex;
03562                 if ( AS.MultiThreaded ) {
03563                     for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
03564                         if ( theindex == ModOptdollars[nummodopt].number ) break;
03565                     }
03566                     if ( nummodopt < NumModOptdollars ) {
03567                         ddtype = ModOptdollars[nummodopt].type;
03568                         if ( ddtype == MODLOCAL ) {
03569                             d = ModOptdollars[nummodopt].dstruct+AT.identity;
03570                         }
03571                         else {
03572                             LOCK(d->pthreadlockread);
03573                         }
03574                     }
03575                 }
03576 #else
03577                 theindex = -theindex;
03578                 d = Dollars + theindex;
03579 #endif
03580                 if ( d->type != DOLINDEX
03581                     || d->index < AM.OffsetIndex
03582                     || d->index >= AM.OffsetIndex + WILD OFFSET ) {
03583                     MLOCK(ErrorMessageLock);
03584                     MesPrint("$s should have been an index"
03585                             ,AC.dollarnames->namebuffer+d->name);
03586                     AN.currentTerm = term;
03587                     MesPrint("Current term: %t");
03588                     AN.listinprint = printscratch;
03589                     printscratch[0] = DOLLAREXPRESSION;
03590                     printscratch[1] = theindex;
03591                     MesPrint("$s = %s"
03592                             ,AC.dollarnames->namebuffer+d->name);
03593                     MUNLOCK(ErrorMessageLock);
03594 #ifdef WITHPTHREADS
03595                     if ( ddtype > 0 && ddtype != MODLOCAL ) {
03596                         UNLOCK(d->pthreadlockread); }
03597 #endif
03598                     goto GenCall;
03599                 theindex = d->index;
03600 #ifdef WITHPTHREADS
03601                 if ( ddtype > 0 && ddtype != MODLOCAL ) { UNLOCK(d->pthreadlockread);
03602 #endif
03603             }
03604             *cp++ = INDTOIND;
03605             *cp++ = 4;
03606             *cp++ = theindex;
03607             *cp++ = ++AR.CurDum;
03608         }
03609         ow = AT.WorkPointer;
03610         AR.CompressPointer = cp;
03611         if ( WildFill(BHEAD ow,term,op) < 0 ) goto GenCall;
03612         AR.CompressPointer = op;
03613         i = ow[0];
03614         WORD term_changed = 0;
03615         for ( j = 0; j < i; j++ ) {
03616             if ( term[j] != ow[j] ) term_changed = 1;
03617             term[j] = ow[j];
03618         }
03619         // If the term was modified by WildFill, set RepCount.
03620         if ( term_changed ) *AN.RepPoint = 1;
03621         AT.WorkPointer = ow;
03622         // Most other calls to ReNumber reset AN.IndDum to AM.IndDum first. Here it is
03623         // not done, but doing it is one way to fix Issue #710. The fix that is
03624         // actually implemented is to change a comparison in FunLevel and then a reset of
03625         // AN.IndDum appears unnecessary here. But maybe one day this comment is
03626         // useful.
03627         ReNumber(BHEAD term);
03628         goto Renormalize;
03629     }
03630     case TYPECHISHOLM:
03631         if ( Chisholm(BHEAD term,level) ) goto GenCall;
03632     CommonEnd:
03633         AT.WorkPointer = term + *term;
03634         goto Return0;

```

```

03634         case TYPEARG:
03635             if ( ( i = execarg(BHEAD term,level) ) < 0 ) goto GenCall;
03636             level = C->lhs[level][2];
03637             if ( i > 0 ) goto ReStart;
03638             break;
03639         case TYPENORM:
03640         case TYPENORM2:
03641         case TYPENORM3:
03642         case TYPENORM4:
03643         case TYPESPLITARG:
03644         case TYPESPLITARG2:
03645         case TYPESPLITFIRSTARG:
03646         case TYPESPLITLASTARG:
03647         case TYPEARGTOEXTRASymbol:
03648             if ( execarg(BHEAD term,level) < 0 ) goto GenCall;
03649             level = C->lhs[level][2];
03650             break;
03651         case TYPEFACTARG:
03652         case TYPEFACTARG2:
03653             { WORD jjj;
03654             if ( ( jjj = execarg(BHEAD term,level) ) < 0 ) goto GenCall;
03655             if ( jjj > 0 ) goto ReStart;
03656             level = C->lhs[level][2];
03657             break; }
03658         case TYPEEXIT:
03659             if ( C->lhs[level][2] > 0 ) {
03660                 MLOCK(ErrorMessageLock);
03661                 MesPrint("%s",C->lhs[level]+3);
03662                 MUNLOCK(ErrorMessageLock);
03663             }
03664             Terminate(-1);
03665             goto GenCall;
03666         case TYPESETEXIT:
03667             AM.exitflag = 1; /* no danger of race conditions */
03668             break;
03669         case TYPEPRINT:
03670             AN.currentTerm = term;
03671             AN.numlistinprint = (C->lhs[level][1] - C->lhs[level][4] - 5)/2;
03672             AN.listinprint = C->lhs[level]+5+C->lhs[level][4];
03673             MLOCK(ErrorMessageLock);
03674             AO.ErrorBlock = 1;
03675             MesPrint((char *) (C->lhs[level]+5));
03676             AO.ErrorBlock = 0;
03677             MUNLOCK(ErrorMessageLock);
03678             break;
03679         case TYPEFPRINT:
03680             {
03681                 int oldFOflag;
03682                 WORD oldPrintType, oldLogHandle = AC.LogHandle;
03683                 AC.LogHandle = C->lhs[level][2];
03684                 MLOCK(ErrorMessageLock);
03685                 oldFOflag = AM.FileOnlyFlag;
03686                 oldPrintType = AO.PrintType;
03687                 if ( AC.LogHandle >= 0 ) {
03688                     AM.FileOnlyFlag = 1;
03689                     AO.PrintType |= PRINTLFILE;
03690                 }
03691                 AO.PrintType |= C->lhs[level][3];
03692                 AN.currentTerm = term;
03693                 AN.numlistinprint = (C->lhs[level][1] - C->lhs[level][4] - 5)/2;
03694                 AN.listinprint = C->lhs[level]+5+C->lhs[level][4];
03695                 MesPrint((char *) (C->lhs[level]+5));
03696                 AO.PrintType = oldPrintType;
03697                 AM.FileOnlyFlag = oldFOflag;
03698                 MUNLOCK(ErrorMessageLock);
03699                 AC.LogHandle = oldLogHandle;
03700             }
03701             break;
03702         case TYPEDEFPRE:
03703             j = C->lhs[level][2];
03704         #ifdef WITHMPI
03705             {
03706                 /*
03707                  * Regardless of parallel/nonparallel switch, we need to set
03708                  * AC.inputnumbers[ii], which indicates that the corresponding
03709                  * preprocessor variable is redefined and so we need to
03710                  * send/broadcast it.
03711                  */
03712                 int ii;
03713                 for ( ii = 0; ii < AC.numpfirstnum; ii++ ) {
03714                     if ( AC.pfirstnum[ii] == j ) break;
03715                 }
03716                 AC.inputnumbers[ii] = AN.ninterms;
03717             }
03718         #endif
03719         #ifdef WITHPTHREADS
03720             if ( AS.MultiThreaded ) {

```

```

03721         int ii;
03722         for ( ii = 0; ii < AC.numpfirstnum; ii++ ) {
03723             if ( AC.pfirstnum[ii] == j ) break;
03724         }
03725         if ( AN.inputnumber < AC.inputnumbers[ii] ) break;
03726         LOCK(AP.PreVarLock);
03727         if ( AN.inputnumber >= AC.inputnumbers[ii] ) {
03728             a = C->lhs[level]+4;
03729             if ( a[a[-1]] == 0 )
03730                 PutPreVar(PreVar[j].name, (UBYTE *) (a), 0, 1);
03731             else
03732                 PutPreVar(PreVar[j].name, (UBYTE *) (a)
03733                     , (UBYTE *) (a+a[-1]+1), 1);
03734         /*
03735             PutPreVar(PreVar[j].name, (UBYTE *) (C->lhs[level]+4), 0, 1);
03736         */
03737         AC.inputnumbers[ii] = AN.inputnumber;
03738     }
03739     UNLOCK(AP.PreVarLock);
03740 }
03741 else
03742 #endif
03743 {
03744     a = C->lhs[level]+4;
03745     LOCK(AP.PreVarLock);
03746     if ( a[a[-1]] == 0 )
03747         PutPreVar(PreVar[j].name, (UBYTE *) (a), 0, 1);
03748     else
03749         PutPreVar(PreVar[j].name, (UBYTE *) (a)
03750             , (UBYTE *) (a+a[-1]+1), 1);
03751     UNLOCK(AP.PreVarLock);
03752 }
03753 break;
03754 case TYPENUMBER:
03755     AT.WorkPointer = term + *term;
03756     if ( FullRenumber(BHEAD term, C->lhs[level][2]) ) goto GenCall;
03757     AT.WorkPointer = term + *term;
03758     if ( *term == 0 ) goto Return0;
03759     break;
03760 case TYPETRY:
03761     if ( TryDo(BHEAD term, C->lhs[level], level) ) goto GenCall;
03762     AT.WorkPointer = term + *term;
03763     goto Return0;
03764 case TYPEASSIGN:
03765     { WORD onc = AR.NoCompress, oldEside = AR.Eside;
03766       WORD oldrepeat = *AN.RepPoint;
03767     /*
03768         Here we have to assign an expression to a $ variable.
03769     */
03770     AR.Eside = RHSIDE;
03771     AR.NoCompress = 1;
03772     AN.cTerm = AN.currentTerm = term;
03773     AT.WorkPointer = term + *term;
03774     *AT.WorkPointer++ = 0;
03775     if ( AssignDollar(BHEAD term, level) ) goto GenCall;
03776     AT.WorkPointer = term + *term;
03777     AN.cTerm = 0;
03778     *AN.RepPoint = oldrepeat;
03779     AR.NoCompress = onc;
03780     AR.Eside = oldEside;
03781     break;
03782     }
03783 case TYPEFINDLOOP:
03784     if ( Lus(term, C->lhs[level][3], C->lhs[level][4],
03785         C->lhs[level][5], C->lhs[level][6], C->lhs[level][2]) ) {
03786         AT.WorkPointer = term + *term;
03787         goto Renormalize;
03788     }
03789     break;
03790 case TYPEINSIDE:
03791     if ( InsideDollar(BHEAD C->lhs[level], level) < 0 ) goto GenCall;
03792     level = C->lhs[level][2];
03793     break;
03794 case TYPETERM:
03795     ret = execterm(BHEAD term, level);
03796     AN.RepPoint = RepSto;
03797     AR.CurDum = DumNow;
03798     CC->numrhs = oldtoprhs;
03799     CC->Pointer = CC->Buffer + oldcpointer;
03800     CCC->numrhs = oldatoprhs;
03801     CCC->Pointer = CCC->Buffer + oldacpointer;
03802     return(ret);
03803 case TYPEDETCURDUM:
03804     AT.WorkPointer = term + *term;
03805     AR.CurDum = DetCurDum(BHEAD term);
03806     break;
03807 case TYPEINEXPRESSION:

```

```

03808         {WORD *l1 = C->lhs[level];
03809         int numexprs = (int)(l1[1]-3);
03810         l1 += 3;
03811         while ( numexprs-- >= 0 ) {
03812             if ( *l1 == AR.CurExpr ) break;
03813             l1++;
03814         }
03815         if ( numexprs < 0 ) level = C->lhs[level][2];
03816     }
03817     break;
03818 case TYPEMERGE:
03819     AT.WorkPointer = term + *term;
03820     if ( DoShuffle(term,level,C->lhs[level][2],C->lhs[level][3]) )
03821         goto GenCall;
03822     AT.WorkPointer = term + *term;
03823     goto Return0;
03824 case TYPESTUFFLE:
03825     AT.WorkPointer = term + *term;
03826     if ( DoStuffle(term,level,C->lhs[level][2],C->lhs[level][3]) )
03827         goto GenCall;
03828     AT.WorkPointer = term + *term;
03829     goto Return0;
03830 case TYPETESTUSE:
03831     AT.WorkPointer = term + *term;
03832     if ( TestUse(term,level) ) goto GenCall;
03833     AT.WorkPointer = term + *term;
03834     break;
03835 case TYPEAPPLY:
03836     AT.WorkPointer = term + *term;
03837     if ( ApplyExec(term,C->lhs[level][2],level) < C->lhs[level][2] ) {
03838         AT.WorkPointer = term + *term;
03839         *AN.RepPoint = 1;
03840         goto ReStart;
03841     }
03842     AT.WorkPointer = term + *term;
03843     break;
03844 /*
03845 case TYPEAPPLYRESET:
03846     AT.WorkPointer = term + *term;
03847     if ( ApplyReset(level) ) goto GenCall;
03848     AT.WorkPointer = term + *term;
03849     break;
03850 */
03851 case TYPECHAININ:
03852     { int lter = *term;
03853     AT.WorkPointer = term + *term;
03854     if ( ChainIn(BHEAD term,C->lhs[level][2]) ) goto GenCall;
03855     AT.WorkPointer = term + *term;
03856     /* Symmetry properties might mean the term has vanished */
03857     if ( *term == 0 ) goto Return0;
03858     if ( *term != lter ) *AN.RepPoint = 1;
03859     }
03860     break;
03861 case TYPECHAINOUT:
03862     { int lter = *term;
03863     AT.WorkPointer = term + *term;
03864     if ( ChainOut(BHEAD term,C->lhs[level][2]) ) goto GenCall;
03865     AT.WorkPointer = term + *term;
03866     if ( *term != lter ) *AN.RepPoint = 1;
03867     }
03868     break;
03869 case TYPEFACTOR:
03870     AT.WorkPointer = term + *term;
03871     if ( DollarFactorize(BHEAD C->lhs[level][2]) ) goto GenCall;
03872     AT.WorkPointer = term + *term;
03873     break;
03874 case TYPEARGIMPLode:
03875     AT.WorkPointer = term + *term;
03876     if ( ArgumentImplode(BHEAD term,C->lhs[level]) ) goto GenCall;
03877     AT.WorkPointer = term + *term;
03878     break;
03879 case TYPEARGEXPLODE:
03880     AT.WorkPointer = term + *term;
03881     if ( ArgumentExplode(BHEAD term,C->lhs[level]) ) goto GenCall;
03882     AT.WorkPointer = term + *term;
03883     break;
03884 case TYPEDENOMINATORS:
03885     if ( DenToFunction(term,C->lhs[level][2]) ) goto ReStart;
03886     break;
03887 case TYPEDROPCOEFFICIENT:
03888     DropCoefficient(BHEAD term);
03889     break;
03890 case TYPETRANSFORM:
03891     AT.WorkPointer = term + *term;
03892     if ( RunTransform(BHEAD term,C->lhs[level]+2) ) goto GenCall;
03893     AT.WorkPointer = term + *term;
03894     if ( *term == 0 ) goto Return0;

```

```

03895         goto ReStart;
03896     case TYPETOPOLYNOMIAL:
03897         AT.WorkPointer = term + *term;
03898         termout = AT.WorkPointer;
03899         if ( ConvertToPoly(BHEAD term,termout,C->lhs[level],0) < 0 ) goto GenCall;
03900         if ( *termout == 0 ) goto Return0;
03901         i = termout[0]; t = term; NCOPY(t,termout,i);
03902         AT.WorkPointer = term + *term;
03903         break;
03904     case TYPEFROMPOLYNOMIAL:
03905         AT.WorkPointer = term + *term;
03906         termout = AT.WorkPointer;
03907         if ( ConvertFromPoly(BHEAD term,termout,0,numxsymbol,0,0) < 0 ) goto GenCall;
03908         if ( *term == 0 ) goto Return0;
03909         i = termout[0]; t = term; NCOPY(t,termout,i);
03910         AT.WorkPointer = term + *term;
03911         goto ReStart;
03912     case TYPEDOLOOP:
03913         level = TestDoLoop(BHEAD C->lhs[level],level);
03914         if ( level < 0 ) goto GenCall;
03915         break;
03916     case TYPEENDDOLOOP:
03917         level = TestEndDoLoop(BHEAD C->lhs[C->lhs[level][2]],C->lhs[level][2]);
03918         if ( level < 0 ) goto GenCall;
03919         break;
03920     case TYPEDROPSYMBOLS:
03921         DropSymbols(BHEAD term);
03922         break;
03923     case TYPEPUTINSIDE:
03924         AT.WorkPointer = term + *term;
03925         if ( PutInside(BHEAD term,C->lhs[level]) < 0 ) goto GenCall;
03926         AT.WorkPointer = term + *term;
03927         /*
03928          * We need to call Generator() to convert slow notation to
03929          * fast notation, which fixes Issue #30.
03930          */
03931         if ( Generator(BHEAD term,level) < 0 ) goto GenCall;
03932         goto Return0;
03933     case TYPEOTOSPECTATOR:
03934         if ( PutInSpectator(term,C->lhs[level][2]) < 0 ) goto GenCall;
03935         goto Return0;
03936     case TYPECANONICALIZE:
03937         AT.WorkPointer = term + *term;
03938         if ( DoCanonicalize(BHEAD term,C->lhs[level]) ) goto GenCall;
03939         AT.WorkPointer = term + *term;
03940         if ( *term == 0 ) goto Return0;
03941         break;
03942     case TYPESWITCH:
03943         AT.WorkPointer = term + *term;
03944         if ( DoSwitch(BHEAD term,C->lhs[level]) ) goto GenCall;
03945         goto Return0;
03946     case TYPEENDSWITCH:
03947         AT.WorkPointer = term + *term;
03948         if ( DoEndSwitch(BHEAD term,C->lhs[level]) ) goto GenCall;
03949         goto Return0;
03950     case TYPESETUSERFLAG:
03951         Expressions[AR.CurExpr].uflags |= 1 << (C->lhs[level][2]);
03952         break;
03953     case TYPECLEARUSERFLAG:
03954         Expressions[AR.CurExpr].uflags &= ~(1 << (C->lhs[level][2]));
03955         break;
03956     case TYPEALLOOPS:
03957         AT.WorkPointer = term + *term;
03958         if ( AllLoops(BHEAD term,level) ) goto GenCall;
03959         goto Return0;
03960     case TYPEALLPATHS:
03961         AT.WorkPointer = term + *term;
03962         if ( AllPaths(BHEAD term,level) ) goto GenCall;
03963         goto Return0;
03964 #ifdef WITHFLOAT
03965     case TYPEEVALUATE:
03966         AT.WorkPointer = term + *term;
03967         if ( C->lhs[level][2] == MZV
03968             || C->lhs[level][2] == EULER
03969             || C->lhs[level][2] == MZVHALF
03970             || C->lhs[level][2] == ALLMZVFUNCTIONS
03971         ) {
03972             if ( EvaluateEuler(BHEAD term,level,C->lhs[level][2]) ) goto GenCall;
03973         }
03974         else {
03975             if ( EvaluateFun(BHEAD term,level,C->lhs[level]) ) goto GenCall;
03976         }
03977         /*
03978         else if ( C->lhs[level][2] == SQRTFUNCTION ) {
03979             if ( EvaluateSqrt(BHEAD term,level,C->lhs[level][2]) ) goto GenCall;
03980         }
03981         else {

```

```

03982             MLOCK(ErrorMessageLock);
03983             MesPrint("Illegal function %d in evaluate statement.",C->lhs[level][2]);
03984             MUNLOCK(ErrorMessageLock);
03985             goto GenCall;
03986         }
03987     */
03988     goto Return0;
03989 case TYPETOFLOAT:
03990     AT.WorkPointer = term + *term;
03991     if ( ToFloat(BHEAD term,level) ) goto GenCall;
03992     goto Return0;
03993 case TYPETORAT:
03994     AT.WorkPointer = term + *term;
03995     if ( ToRat(BHEAD term,level) ) goto GenCall;
03996     goto Return0;
03997 case TYPESTRICTROUNDING:
03998     AT.WorkPointer = term + *term;
03999     if ( StrictRounding(BHEAD term,level,C->lhs[level][2],C->lhs[level][3]) ) goto
GenCall;
04000     goto Return0;
04001 case TYPECHOP:
04002     AT.WorkPointer = term + *term;
04003     if ( Chop(BHEAD term,level) ) goto GenCall;
04004     goto Return0;
04005 #endif
04006     }
04007     goto SkipCount;
04008 /*
04009     #] Special action :
04010 */
04011     }
04012     } while ( ( i = TestMatch(BHEAD term,&level) ) == 0 );
04013     if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
04014     if ( i > 0 ) replac = TestSub(BHEAD term,level);
04015     else replac = i;
04016     if ( replac >= 0 || AT.TMout[1] != SYMMETRIZE ) {
04017         *AN.RepPoint = 1;
04018         AR.exchanged = 1;
04019     }
04020     if ( replac < 0 ) { /* Terms come from automatic generation */
04021 AutoGen:     i = *AT.TMout;
04022             t = termout = AT.WorkPointer;
04023             if ( ( AT.WorkPointer += i ) > AT.WorkTop ) goto OverWork;
04024             accum = AT.TMout;
04025             while ( --i >= 0 ) *t++ = *accum++;
04026             if ( (*(FG.Operation[termout[1]])(BHEAD term,termout,replac,level) ) goto GenCall;
04027             AT.WorkPointer = termout;
04028             goto Return0;
04029     }
04030 }
04031 if ( applyflag ) { TableReset(); applyflag = 0; }
04032
04033 if ( AN.TeInFun ) { /* Match in function argument */
04034     if ( AN.TeInFun < 0 && !AN.TeSuOut ) {
04035
04036         if ( AR.TePos >= 0 ) goto AutoGen;
04037         switch ( AN.TeInFun ) {
04038             case -1:
04039                 if ( DoDistrib(BHEAD term,level) ) goto GenCall;
04040                 break;
04041             case -2:
04042                 if ( DoDelta3(BHEAD term,level) ) goto GenCall;
04043                 break;
04044             case -3:
04045                 if ( DoTableExpansion(term,level) ) goto GenCall;
04046                 break;
04047             case -4:
04048                 if ( FactorIn(BHEAD term,level) ) goto GenCall;
04049                 break;
04050             case -5:
04051                 if ( FactorInExpr(BHEAD term,level) ) goto GenCall;
04052                 break;
04053             case -6:
04054                 if ( TermsInBracket(BHEAD term,level) < 0 ) goto GenCall;
04055                 break;
04056             case -7:
04057                 if ( ExtraSymFun(BHEAD term,level) < 0 ) goto GenCall;
04058                 break;
04059             case -8:
04060                 if ( GCDfunction(BHEAD term,level) < 0 ) goto GenCall;
04061                 break;
04062             case -9:
04063                 if ( DIVfunction(BHEAD term,level,0) < 0 ) goto GenCall;
04064                 break;
04065             case -10:
04066                 if ( DIVfunction(BHEAD term,level,1) < 0 ) goto GenCall;
04067                 break;

```

```

04068         case -11:
04069             if ( DIVfunction(BHEAD term,level,2) < 0 ) goto GenCall;
04070             break;
04071         case -12:
04072             if ( DoPermutations(BHEAD term,level) ) goto GenCall;
04073             break;
04074         case -13:
04075             if ( DoPartitions(BHEAD term,level) ) goto GenCall;
04076             break;
04077         case -14:
04078             if ( DIVfunction(BHEAD term,level,3) < 0 ) goto GenCall;
04079             break;
04080         case -15:
04081             if ( GenTopologies(BHEAD term,level) < 0 ) goto GenCall;
04082             break;
04083         case -16:
04084             if ( GenDiagrams(BHEAD term,level) < 0 ) goto GenCall;
04085             break;
04086     }
04087 }
04088 else {
04089     termout = AT.WorkPointer;
04090     AT.WorkPointer = (WORD *) (((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
04091     if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04092     if ( InFunction(BHEAD term,termout) ) goto GenCall;
04093     AT.WorkPointer = termout + *termout;
04094     *AN.RepPoint = 1;
04095     AR.expchanged = 1;
04096     if ( *termout && Generator(BHEAD termout,level) < 0 ) goto GenCall;
04097     AT.WorkPointer = termout;
04098 }
04099 }
04100 else if ( replac > 0 ) {
04101     power = AN.TeSuOut;
04102     tepos = AR.TePos;
04103     if ( power < 0 ) { /* Table expansion */
04104         power = -power; tepos = 0;
04105     }
04106     extractbuff = AT.TMbuff;
04107     if ( extractbuff == AM.dbufnum ) {
04108         d = DolToTerms(BHEAD replac);
04109         if ( d && d->where != 0 ) {
04110             iscopy = 1;
04111             if ( AT.TMdolfac > 0 ) { /* We need a factor */
04112                 if ( AT.TMdolfac == 1 ) {
04113                     if ( d->nfactors ) {
04114                         numfac[0] = 4;
04115                         numfac[1] = d->nfactors;
04116                         numfac[2] = 1;
04117                         numfac[3] = 3;
04118                         numfac[4] = 0;
04119                     }
04120                     else {
04121                         numfac[0] = 0;
04122                     }
04123                     StartBuf = numfac;
04124                 }
04125                 else {
04126                     if ( (AT.TMdolfac-1) > d->nfactors && d->nfactors > 0 ) {
04127                         MLOCK(ErrorMessageLock);
04128                         MesPrint("Attempt to use an nonexistent factor %d of a
$-variable", (WORD) (AT.TMdolfac-1));
04129                     }
04130                     if ( d->nfactors == 1 )
04131                         MesPrint("There is only one factor");
04132                     else
04133                         MesPrint("There are only %d factors", (WORD) (d->nfactors));
04134                     MUNLOCK(ErrorMessageLock);
04135                     goto GenCall;
04136                 }
04137             }
04138             if ( d->nfactors > 1 ) {
04139                 DOLLARS dd;
04140                 LONG dsize;
04141                 WORD *td1, *td2;
04142                 dd = Dollars + replac;
04143 #ifdef WITHPTHREADS
04144                 {
04145                     int nummodopt, dtype = -1;
04146                     if ( AS.MultiThreaded && ( AC.mparallelfac == PARALLELFLAG ) ) {
04147                         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
04148                             if ( replac == ModOptdollars[nummodopt].number ) break;
04149                         }
04150                         if ( nummodopt < NumModOptdollars ) {
04151                             dtype = ModOptdollars[nummodopt].type;
04152                             if ( dtype == MODLOCAL ) {
04153                                 dd = ModOptdollars[nummodopt].dstruct+AT.identity;
04154                             }
04155                         }
04156                     }
04157                 }
04158 #endif
04159             }
04160         }
04161     }

```

```

04154         }
04155     }
04156 #endif
04157     dsize = dd->factors[AT.TMdolfac-2].size;
04158     /*
04159     We copy only the factor we need
04160     */
04161     if ( dsize == 0 ) {
04162         numfac[0] = 4;
04163         numfac[1] = d->factors[AT.TMdolfac-2].value;
04164         numfac[2] = 1;
04165         numfac[3] = 3;
04166         numfac[4] = 0;
04167         StartBuf = numfac;
04168         if ( numfac[1] < 0 ) {
04169             numfac[1] = -numfac[1];
04170             numfac[3] = -numfac[3];
04171         }
04172     }
04173     else {
04174         d->factors[AT.TMdolfac-2].where = td2 = (WORD *)Malloc1(
04175             (dsize+1)*sizeof(WORD), "Copy of factor");
04176         td1 = dd->factors[AT.TMdolfac-2].where;
04177         StartBuf = td2;
04178         d->size = dsize; d->type = DOLTERMS;
04179         NCOPY(td2, td1, dsize);
04180         *td2 = 0;
04181     }
04182 }
04183 else if ( d->nfactors == 1 ) {
04184     StartBuf = d->where;
04185 }
04186 else {
04187     MLOCK(ErrorMessageLock);
04188     if ( d->nfactors == 0 ) {
04189         MesPrint("Attempt to use factor %d of an unfactored
04190 $-variable", (WORD) (AT.TMdolfac-1));
04191     }
04192     else {
04193         MesPrint("Internal error. Illegal number of factors for $-variable");
04194     }
04195     MUNLOCK(ErrorMessageLock);
04196     goto GenCall;
04197 }
04198 }
04199 else StartBuf = d->where;
04200 }
04201 else {
04202     d = Dollars + replac;
04203     StartBuf = zeroDollar;
04204 }
04205 posisub = 0;
04206 i = DetCommu(d->where);
04207 #ifdef WITHPTHREADS
04208     if ( AS.MultiThreaded ) {
04209         for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
04210             if ( replac == ModOptdollars[nummodopt].number ) break;
04211         }
04212         if ( nummodopt < NumModOptdollars ) {
04213             dtype = ModOptdollars[nummodopt].type;
04214             if ( dtype != MODLOCAL && dtype != MODSUM ) {
04215                 if ( StartBuf[0] && StartBuf[StartBuf[0]] ) {
04216                     MLOCK(ErrorMessageLock);
04217                     MesPrint("A dollar variable with modoption max or min can have only one
04218 term");
04219                     MUNLOCK(ErrorMessageLock);
04220                     goto GenCall;
04221                 }
04222                 LOCK(d->pthreadlockread);
04223             }
04224         }
04225     }
04226 #endif
04227 }
04228 else {
04229     StartBuf = cbuf[extractbuff].Buffer;
04230     posisub = cbuf[extractbuff].rhs[replac] - StartBuf;
04231     i = (WORD) cbuf[extractbuff].CanCommu[replac];
04232 }
04233 if ( power == 1 ) { /* Just a single power */
04234     termout = AT.WorkPointer;
04235     AT.WorkPointer = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer;
04236     if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04237     while ( StartBuf[posisub] ) {
04238         if ( extractbuff == AT.allbufnum ) WildDollars(BHEAD & (StartBuf[posisub]));
04239         AT.WorkPointer = (WORD *) ((UBYTE *) (termout)) + AM.MaxTer;

```



```

04239         if ( InsertTerm(BHEAD term,replac,extractbuff,
04240             &(StartBuf[posisub]),termout,tepos) < 0 ) goto GenCall;
04241         AT.WorkPointer = termout + *termout;
04242         *AN.RepPoint = 1;
04243         AR.expchanged = 1;
04244         posisub += StartBuf[posisub];
04245     /*
04246         For multiple table substitutions it may be better to
04247         do modulus arithmetic right here
04248         Turns out to be not very effective.
04249
04250         if ( AN.ncmod != 0 ) {
04251             if ( Modulus(termout) ) goto GenCall;
04252             if ( !*termout ) goto Return0;
04253         }
04254     */
04255     #ifndef WITHPTHREADS
04256         if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) {
04257             UNLOCK(d->pthreadlockread); }
04258         if ( ( AS.Balancing && CC->numrhs == 0 ) && StartBuf[posisub] ) {
04259             if ( ( id = ConditionalGetAvailableThread() ) >= 0 ) {
04260                 if ( BalanceRunThread(BHEAD id,termout,level) < 0 ) goto GenCall;
04261             }
04262         } else
04263     #endif
04264         if ( Generator(BHEAD termout,level) < 0 ) goto GenCall;
04265     #ifdef WITHPTHREADS
04266         if ( dtype > 0 && dtype != MODLOCAL ) { dtype = 0; break; }
04267     #endif
04268         if ( iscopy == 0 && ( extractbuff != AM.dbufnum ) ) {
04269     /*
04270         There are cases in which a bigger buffer is created
04271         on the fly, like with wildcard buffers.
04272         We play it safe here. Maybe we can be more selective
04273         in some distant future?
04274     */
04275         StartBuf = cbuf[extractbuff].Buffer;
04276     }
04277 }
04278 if ( extractbuff == AT.allbufnum ) {
04279     CBUF *Ce = cbuf + extractbuff;
04280     Ce->Pointer = Ce->rhs[Ce->numrhs--];
04281 }
04282 #ifdef WITHPTHREADS
04283 if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) { UNLOCK(d->pthreadlockread);
dtype = 0; }
04284 #endif
04285 if ( iscopy ) {
04286     if ( d->nfactors > 1 ) {
04287         int j;
04288         for ( j = 0; j < d->nfactors; j++ ) {
04289             if ( d->factors[j].where ) M_free(d->factors[j].where,"Copy of factor");
04290         }
04291         M_free(d->factors,"Dollar factors");
04292     }
04293     M_free(d,"Copy of dollar variable");
04294     d = 0; iscopy = 0;
04295 }
04296 AT.WorkPointer = termout;
04297 }
04298 else if ( i <= 1 ) { /* Use binomials */
04299     LONG posit, olw;
04300     WORD *same, *ow = AT.WorkPointer;
04301     LONG olpw = AT.posWorkPointer;
04302     power1 = power+1;
04303     WantAddLongs(power1);
04304     olw = posit = AT.lWorkPointer; AT.lWorkPointer += power1;
04305     same = ++AT.WorkPointer;
04306     a = accum = ( AT.WorkPointer += power1+1 );
04307     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2*AM.MaxTer);
04308     if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04309     AT.lWorkspace[posit] = posisub;
04310     same[-1] = 0;
04311     *same = 1;
04312     *accum = 0;
04313     tepos = AR.TePos;
04314     i = 1;
04315     do {
04316         if ( StartBuf[AT.lWorkspace[posit]] ) {
04317             if ( ( a = PasteTerm(BHEAD i-1,accum,
04318                 &(StartBuf[AT.lWorkspace[posit]]),i,*same) ) == 0 )
04319                 goto GenCall;
04320             AT.lWorkspace[posit+1] = AT.lWorkspace[posit];
04321             same[1] = *same + 1;
04322             if ( i > 1 && AT.lWorkspace[posit] < AT.lWorkspace[posit-1] ) *same = 1;
04323             AT.lWorkspace[posit] += StartBuf[AT.lWorkspace[posit]];

```

```

04324         i++;
04325         posit++;
04326         same++;
04327     }
04328     else {
04329         i--; posit--; same--;
04330     }
04331     if ( i > power ) {
04332         termout = AT.WorkPointer = a;
04333         AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2*AM.MaxTer);
04334         if ( AT.WorkPointer > AT.WorkTop )
04335             goto OverWork;
04336         if ( FiniTerm(BHEAD term,accum,termout,replac,tepos) ) goto GenCall;
04337         AT.WorkPointer = termout + *termout;
04338         *AN.RepPoint = 1;
04339         AR.expchanged = 1;
04340 #ifndef WITHPTHREADS
04341         if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) {
04342             UNLOCK(d->pthreadlockread); }
04343         if ( ( AS.Balancing && CC->numrhs == 0 ) && ( i > 0 )
04344             && ( id = ConditionalGetAvailableThread() ) >= 0 ) {
04345             if ( BalanceRunThread(BHEAD id,termout,level) < 0 ) goto GenCall;
04346         }
04347     #endif
04348     if ( Generator(BHEAD termout,level) ) goto GenCall;
04349 #ifndef WITHPTHREADS
04350     if ( dtype > 0 && dtype != MODLOCAL ) { dtype = 0; break; }
04351 #endif
04352     if ( iscopy == 0 && ( extractbuff != AM.dbufnum ) )
04353         StartBuf = cbuf[extractbuff].Buffer;
04354     i--; posit--; same--;
04355 }
04356 } while ( i > 0 );
04357 #ifndef WITHPTHREADS
04358 if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) { UNLOCK(d->pthreadlockread);
dtype = 0; }
04359 #endif
04360 if ( iscopy ) {
04361     if ( d->nfactors > 1 ) {
04362         int j;
04363         for ( j = 0; j < d->nfactors; j++ ) {
04364             if ( d->factors[j].where ) M_free(d->factors[j].where,"Copy of factor");
04365             M_free(d->factors,"Dollar factors");
04366         }
04367         M_free(d,"Copy of dollar variable");
04368         d = 0; iscopy = 0;
04369     }
04370     AT.WorkPointer = ow; AT.lWorkPointer = olw; AT.posWorkPointer = olpw;
04371 }
04372 else {
04373     /* No binomials */
04374     LONG posit, olw, olpw = AT.posWorkPointer;
04375     WantAddLongs(power);
04376     posit = olw = AT.lWorkPointer; AT.lWorkPointer += power;
04377     a = accum = AT.WorkPointer;
04378     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2*AM.MaxTer);
04379     if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04380     for ( i = 0; i < power; i++ ) AT.lWorkspace[posit++] = posisub;
04381     posit = olw;
04382     *accum = 0;
04383     tepos = AR.TePos;
04384     i = 0;
04385     while ( i >= 0 ) {
04386         if ( StartBuf[AT.lWorkspace[posit]] ) {
04387             if ( ( a = PasteTerm(BHEAD i,accum,
04388                 &(StartBuf[AT.lWorkspace[posit]]),1,1) ) == 0 ) goto GenCall;
04389             AT.lWorkspace[posit] += StartBuf[AT.lWorkspace[posit]];
04390             i++; posit++;
04391         }
04392         else {
04393             AT.lWorkspace[posit--] = posisub;
04394             i--;
04395         }
04396         if ( i >= power ) {
04397             termout = AT.WorkPointer = a;
04398             AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2*AM.MaxTer);
04399             if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04400             if ( FiniTerm(BHEAD term,accum,termout,replac,tepos) ) goto GenCall;
04401             AT.WorkPointer = termout + *termout;
04402             *AN.RepPoint = 1;
04403             AR.expchanged = 1;
04404 #ifndef WITHPTHREADS
04405             if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) {
04406                 UNLOCK(d->pthreadlockread); }
04407             if ( ( AS.Balancing && CC->numrhs == 0 ) && ( i > 0 ) && ( id =
ConditionalGetAvailableThread() ) >= 0 ) {

```

```

04407             if ( BalanceRunThread(BHEAD id,termout,level) < 0 ) goto GenCall;
04408         }
04409         else
04410 #endif
04411         if ( Generator(BHEAD termout,level) ) goto GenCall;
04412 #ifdef WITHPTHREADS
04413         if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) { dtype = 0; break; }
04414 #endif
04415         if ( iscopy == 0 && ( extractbuff != AM.dbufnum ) )
04416             StartBuf = cbuf[extractbuff].Buffer;
04417         i--; posit--;
04418     }
04419 }
04420 #ifdef WITHPTHREADS
04421     if ( dtype > 0 && dtype != MODLOCAL && dtype != MODSUM ) { UNLOCK(d->pthreadlockread);
dtype = 0; }
04422 #endif
04423     if ( iscopy ) {
04424         if ( d->nfactors > 1 ) {
04425             int j;
04426             for ( j = 0; j < d->nfactors; j++ ) {
04427                 if ( d->factors[j].where ) M_free(d->factors[j].where,"Copy of factor");
04428             }
04429             M_free(d->factors,"Dollar factors");
04430         }
04431         M_free(d,"Copy of dollar variable");
04432         d = 0; iscopy = 0;
04433     }
04434     AT.WorkPointer = accum;
04435     AT.lWorkPointer = olw;
04436     AT.posWorkPointer = olpw;
04437 }
04438 }
04439 else { /* Expression from disk */
04440     POSITION StartPos;
04441     LONG position, olpw, opw, comprev, extra;
04442     RENUMBER renumber;
04443     WORD *Freeze, *aa, *dummies;
04444     replac = -replac-1;
04445     power = AN.TeSuOut;
04446     Freeze = AN.Frozen;
04447     if ( Expressions[replac].status == STOREDEXPRESSION ) {
04448         POSITION firstpos;
04449         SETSTARTPOS(firstpos);
04450
04451 /* Note that AT.TMaddr is needed for GetTable just once! */
04452 /*
04453 We need space for the previous term in the compression
04454 This is made available in AR.CompressBuffer, although we may get
04455 problems with this sooner or later. Hence we need to keep
04456 a set of pointers in AR.CompressBuffer
04457 Note that after the last call there has been no use made
04458 of AR.CompressPointer, so it points automatically at its original
04459 position!
04460 */
04461         WantAddPointers(power+1);
04462         comprev = opw = AT.pWorkPointer;
04463         AT.pWorkPointer += power+1;
04464         WantAddPositions(power+1);
04465         position = olpw = AT.posWorkPointer;
04466         AT.posWorkPointer += power + 1;
04467
04468         AT.pWorkSpace[comprev++] = AR.CompressPointer;
04469
04470         for ( i = 0; i < power; i++ ) {
04471             PUTZERO(AT.posWorkSpace[position]); position++;
04472         }
04473         position = olpw;
04474         if ( ( renumber = GetTable(replac,&(AT.posWorkSpace[position]),1) ) == 0 ) goto GenCall;
04475         dummies = AT.WorkPointer;
04476         *dummies++ = AR.CurDum;
04477         AT.WorkPointer += power+2;
04478         accum = AT.WorkPointer;
04479         AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2*AM.MaxTer);
04480         if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04481         aa = AT.WorkPointer;
04482         *accum = 0;
04483         i = 0; StartPos = AT.posWorkSpace[position];
04484         dummies[i] = AR.CurDum;
04485         while ( i >= 0 ) {
04486             skippedfirst:
04487                 AR.CompressPointer = AT.pWorkSpace[comprev-1];
04488                 if ( ( extra = PasteFile(BHEAD i,accum,&(AT.posWorkSpace[position])
04489                     ,&a,renumber,Freeze,replac) ) < 0 ) goto GenCall;
04489                 if ( Expressions[replac].numdummies > 0 ) {
04490                     AR.CurDum = dummies[i] + Expressions[replac].numdummies;
04491                 }
04492             }

```

```

04493         if ( NOTSTARTPOS(firstpos) ) {
04494             if ( ISMINPOS(firstpos) || ISEQUALPOS(firstpos,AT.posWorkSpace[position]) ) {
04495                 firstpos = AT.posWorkSpace[position];
04496             /*
04497                 ADDPOS(AT.posWorkSpace[position],extra * sizeof(WORD));
04498             */
04499             goto skippedfirst;
04500         }
04501     }
04502     if ( extra ) {
04503         /*
04504             ADDPOS(AT.posWorkSpace[position],extra * sizeof(WORD));
04505         */
04506         i++; AT.posWorkSpace[++position] = StartPos;
04507         AT.pWorkSpace[comprev++] = AR.CompressPointer;
04508         dummies[i] = AR.CurDum;
04509     }
04510     else {
04511         PUTZERO(AT.posWorkSpace[position]); position--; i--;
04512         AR.CurDum = dummies[i];
04513         comprev--;
04514     }
04515     if ( i >= power ) {
04516         termout = AT.WorkPointer = a;
04517         AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2*AM.MaxTer);
04518         if ( AT.WorkPointer > AT.WorkTop ) goto OverWork;
04519         if ( FiniTerm(BHEAD term,accum,termout,replac,0) ) goto GenCall;
04520         if ( *termout ) {
04521             AT.WorkPointer = termout + *termout;
04522             *AN.RepPoint = 1;
04523             AR.expchanged = 1;
04524 #ifdef WITHPTHREADS
04525             if ( ( AS.Balancing && CC->numrhs == 0 ) && ( i > 0 ) && ( id =
ConditionalGetAvailableThread() ) >= 0 ) {
04526                 if ( BalanceRunThread(BHEAD id,termout,level) < 0 ) goto GenCall;
04527             }
04528             else
04529                 if ( Generator(BHEAD termout,level) ) goto GenCall;
04530 #endif
04531             i--; position--;
04532             AR.CurDum = dummies[i];
04533             comprev--;
04534         }
04535         AT.WorkPointer = aa;
04536     }
04537     AT.WorkPointer = accum;
04538     AT.posWorkPointer = olpw;
04539     AT.pWorkPointer = opw;
04540     /*
04541         Bug fix. See also GetTable
04542     */
04543     #ifdef WITHPTHREADS
04544         M_free(renumber->symb.lo,"VarSpace");
04545         M_free(renumber,"Renummer");
04546     #endif
04547     /*
04548         if ( renumber->symb.lo != AN.dummyrenumlist )
04549             M_free(renumber->symb.lo,"VarSpace");
04550         M_free(renumber,"Renummer");
04551     */
04552     }
04553     else {
04554         /* Active expression */
04555         aa = accum = AT.WorkPointer;
04556         if ( ( (WORD *)(((UBYTE *) (AT.WorkPointer)) + 2 * AM.MaxTer + sizeof(WORD)) ) > AT.WorkTop
)
04557             goto OverWork;
04558         *accum++ = -1; AT.WorkPointer++;
04559         if ( DoOnePow(BHEAD term,power,replac,accum,aa,level,Freeze) ) goto GenCall;
04560         AT.WorkPointer = aa;
04561     }
04562 }
04563 Return0:
04564     AR.CurDum = DumNow;
04565     AN.RepPoint = RepSto;
04566     CC->numrhs = oldtoprhs;
04567     CC->Pointer = CC->Buffer + oldcpointer;
04568     CCC->numrhs = oldatoprhs;
04569     CCC->Pointer = CCC->Buffer + oldacpointer;
04570     return(0);
04571
04572 GenCall:
04573     if ( AM.tracebackflag ) {
04574         termout = term;
04575         MLOCK(ErrorMessageLock);
04576         AO.OutFill = AO.OutputLine = (UBYTE *)AT.WorkPointer;
04577         AO.OutSkip = 3;

```

```

04578     FiniLine();
04579     i = *termout;
04580     while ( --i >= 0 ) {
04581         TalToLine((UWORD) (*termout++));
04582         TokenToLine((UBYTE *) " ");
04583     }
04584     AO.OutSkip = 0;
04585     FiniLine();
04586     MesCall("Generator");
04587     MUNLOCK(ErrorMessageLock);
04588 }
04589 CC->numrhs = oldtoprhs;
04590 CC->Pointer = CC->Buffer + oldcpointer;
04591 CCC->numrhs = oldatoprhs;
04592 CCC->Pointer = CCC->Buffer + oldacpointer;
04593 return(-1);
04594 OverWork:
04595 CC->numrhs = oldtoprhs;
04596 CC->Pointer = CC->Buffer + oldcpointer;
04597 CCC->numrhs = oldatoprhs;
04598 CCC->Pointer = CCC->Buffer + oldacpointer;
04599 MLOCK(ErrorMessageLock);
04600 MesWork();
04601 MUNLOCK(ErrorMessageLock);
04602 return(-1);
04603 }
04604
04605 /*
04606     #] Generator :
04607     #[ DoOnePow :          WORD DoOnePow(term,power,nexp,accum,aa,level,freeze)
04608 */
04633 #ifdef WITHPTHREADS
04634 char freezestring[] = "freeze<-xxxx";
04635 #endif
04636
04637 int DoOnePow(PHEAD WORD *term, WORD power, WORD nexp, WORD * accum,
04638             WORD *aa, WORD level, WORD *freeze)
04639 {
04640     GETBIDENTITY
04641     POSITION oldposition, startposition;
04642     WORD *acc, *termout, fromfreeze = 0;
04643     WORD *oldipointer = AR.CompressPointer;
04644     FILEHANDLE *fi;
04645     WORD type, retval;
04646     WORD oldGetOneFile = AR.GetOneFile;
04647     WORD olddummies = AR.CurDum;
04648     WORD extradummies = Expressions[nexp].numdummies;
04649     /*
04650     The next code is for some tricky debugging. (5-jan-2010 JV)
04651     Normally it should be disabled.
04652     */
04653     /*
04654     #ifdef WITHPTHREADS
04655     if ( freeze ) {
04656         MLOCK(ErrorMessageLock);
04657         if ( AT.identity < 10 ) {
04658             freezestring[8] = '0'+AT.identity;
04659             freezestring[9] = '>';
04660             freezestring[10] = 0;
04661         }
04662         else if ( AT.identity < 100 ) {
04663             freezestring[8] = '0'+AT.identity/10;
04664             freezestring[9] = '0'+AT.identity%10;
04665             freezestring[10] = '>';
04666             freezestring[11] = 0;
04667         }
04668         else {
04669             freezestring[8] = 0;
04670         }
04671         PrintTerm(freeze,freezestring);
04672         MUNLOCK(ErrorMessageLock);
04673     }
04674     #else
04675     if ( freeze ) PrintTerm(freeze,"freeze");
04676     #endif
04677     */
04678     type = Expressions[nexp].status;
04679     if ( type == HIDDENLEXPRESSION || type == HIDDENEXPRESSION
04680         || type == DROPHLEXPRESSION || type == DROPHGEXPRESSION
04681         || type == UNHIDELEXPRESSION || type == UNHIDEGEXPRESSION ) {
04682         AR.GetOneFile = 2; fi = AR.hidefile;
04683     }
04684     else {
04685         AR.GetOneFile = 0; fi = AR.infile;
04686     }
04687     if ( fi->handle >= 0 ) {
04688         PUTZERO(oldposition);

```

```

04689 #ifdef WITHSEEK
04690     LOCK(AS.inputslock);
04691     SeekFile(fi->handle,&oldposition,SEEK_CUR);
04692     UNLOCK(AS.inputslock);
04693 #endif
04694 }
04695 else {
04696     SETBASEPOSITION(oldposition,fi->POfill-fi->PObuffer);
04697 }
04698 if ( freeze && ( Expressions[nexp].bracketinfo != 0 ) ) {
04699     POSITION *brapos;
04700 /*
04701     There is a bracket index
04702     AR.CompressPointer = oldipointer;
04703 */
04704     (*aa)++;
04705     power--;
04706     if ( ( brapos = FindBracket(nexp,freeze) ) == 0 )
04707         goto EndExpr;
04708     startposition = *brapos;
04709     goto doterms;
04710 }
04711 startposition = AS.OldOnFile[nexp];
04712 retval = GetOneTerm(BHEAD accum,fi,&startposition,0);
04713 if ( retval > 0 ) { /* Skip prototype */
04714     (*aa)++;
04715     power--;
04716 doterms:
04717     AR.CompressPointer = oldipointer;
04718     for (;;) {
04719         retval = GetOneTerm(BHEAD accum,fi,&startposition,0);
04720         if ( retval <= 0 ) break;
04721 /*
04722         Here should come the code to test for [].
04723 */
04724         if ( freeze ) {
04725             WORD *t, *m, *r, *mstop;
04726             WORD *tset;
04727             t = accum;
04728             m = freeze;
04729             m += *m;
04730             m -= ABS(m[-1]);
04731             mstop = m;
04732             m = freeze + 1;
04733             r = t;
04734             r += *t;
04735             r -= ABS(r[-1]);
04736             t++;
04737             tset = t;
04738             while ( t < r && *t != HAAKJE ) t += t[1];
04739             if ( t >= r ) {
04740                 if ( m < mstop ) {
04741                     if ( fromfreeze ) goto EndExpr;
04742                     goto NextTerm;
04743                 }
04744                 t = tset;
04745             }
04746             else {
04747                 r = tset;
04748                 while ( r < t && m < mstop ) {
04749                     if ( *r == *m ) { m++; r++; }
04750                     else {
04751                         if ( fromfreeze ) goto EndExpr;
04752                         goto NextTerm;
04753                     }
04754                 }
04755                 if ( r < t || m < mstop ) {
04756                     if ( fromfreeze ) goto EndExpr;
04757                     goto NextTerm;
04758                 }
04759             }
04760             fromfreeze = 1;
04761             r = tset;
04762             m = accum;
04763             m += *m;
04764             while ( t < m ) *r++ = *t++;
04765             *accum = WORDDIF(r,accum);
04766         }
04767         if ( extradummies > 0 ) {
04768             if ( olddummies > AM.IndDum ) {
04769                 MoveDummies(BHEAD accum,olddummies-AM.IndDum);
04770             }
04771             AR.CurDum = olddummies+extradummies;
04772         }
04773         acc = accum;
04774         acc += *acc;
04775         if ( power <= 0 ) {

```

```

04776         termout = acc;
04777         AT.WorkPointer = (WORD *) (((UBYTE *) (acc)) + 2*AM.MaxTer);
04778         if ( AT.WorkPointer > AT.WorkTop ) {
04779             MLOCK(ErrorMessageLock);
04780             MesWork();
04781             MUNLOCK(ErrorMessageLock);
04782             return(-1);
04783         }
04784         if ( FiniTerm(BHEAD term,aa,termout,nexp,0) ) goto PowCall;
04785         if ( *termout ) {
04786             MarkPolyRatFunDirty(termout)
04787             PolyFunDirty(BHEAD termout); */
04788             AT.WorkPointer = termout + *termout;
04789             *AN.RepPoint = 1;
04790             AR.expchanged = 1;
04791             if ( Generator(BHEAD termout,level) ) goto PowCall;
04792         }
04793     }
04794     else {
04795         if ( acc > AT.WorkTop ) {
04796             MLOCK(ErrorMessageLock);
04797             MesWork();
04798             MUNLOCK(ErrorMessageLock);
04799             return(-1);
04800         }
04801         if ( DoOnePow(BHEAD term,power,nexp,acc,aa,level,freeze) ) goto PowCall;
04802     }
04803 NextTerm;;
04804     AR.CompressPointer = oldipointer;
04805 }
04806 EndExpr:
04807     (*aa)--;
04808 }
04809     AR.CompressPointer = oldipointer;
04810     if ( fi->handle >= 0 ) {
04811 #ifdef WITHSEEK
04812         LOCK(AS.inputslock);
04813         SeekFile(fi->handle,&oldposition,SEEK_SET);
04814         UNLOCK(AS.inputslock);
04815         if ( ISNEGPOS(oldposition) ) {
04816             MLOCK(ErrorMessageLock);
04817             MesPrint("File error");
04818             goto PowCall2;
04819         }
04820 #endif
04821     }
04822     else {
04823         fi->POfill = fi->PObuffer + BASEPOSITION(oldposition);
04824     }
04825     AR.GetOneFile = oldGetOneFile;
04826     AR.CurDum = olddummies;
04827     return(0);
04828 PowCall;;
04829     MLOCK(ErrorMessageLock);
04830 #ifdef WITHSEEK
04831 PowCall2;;
04832 #endif
04833     MesCall("DoOnePow");
04834     MUNLOCK(ErrorMessageLock);
04835     SETERROR(-1)
04836 }
04837
04838 /*
04839     #] DoOnePow :
04840     #[ Deferred :          WORD Deferred(term,level)
04841 */
04858 int Deferred(PHEAD WORD *term, WORD level)
04859 {
04860     GETBIDENTITY
04861     POSITION startposition;
04862     WORD *t, *m, *mstop, *tstart, decr, oldb, *termout, i, *oldwork, retval;
04863     WORD *oldipointer = AR.CompressPointer, *oldPOfill = AR.infile->POfill;
04864     WORD oldGetOneFile = AR.GetOneFile;
04865     AR.GetOneFile = 1;
04866     oldwork = AT.WorkPointer;
04867     AT.WorkPointer = (WORD *) (((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
04868     termout = AT.WorkPointer;
04869     AR.DeferFlag = 0;
04870     startposition = AR.DefPosition;
04871 /*
04872     Store old position
04873 */
04874     if ( AR.infile->handle >= 0 ) {
04875 /*
04876         PUTZERO(oldposition);
04877         SeekFile(AR.infile->handle,&oldposition,SEEK_CUR);
04878 */

```

```

04879     }
04880     else {
04881     /*
04882         SETBASEPOSITION(oldposition,AR.infile->POfill-AR.infile->PObuffer);
04883     */
04884         AR.infile->POfill = (WORD *) ((UBYTE *) (AR.infile->PObuffer)
04885             +BASEPOSITION(startposition));
04886     }
04887     /*
04888         Look in the CompressBuffer where the bracket contents start
04889     */
04890     t = m = AR.CompressBuffer;
04891     t += *t;
04892     mstop = t - ABS(t[-1]);
04893     m++;
04894     while ( *m != HAAKJE && m < mstop ) m += m[1];
04895     if ( m >= mstop ) { /* No deferred action! */
04896         AT.WorkPointer = term + *term;
04897         if ( Generator(BHEAD term,level) ) goto DefCall;
04898         AR.DeferFlag = 1;
04899         AT.WorkPointer = oldwork;
04900         AR.GetOneFile = oldGetOneFile;
04901         return(0);
04902     }
04903     mstop = m + m[1];
04904     decr = WORDDIF(mstop,AR.CompressBuffer)-1;
04905     tstart = AR.CompressPointer + decr;
04906
04907     m = AR.CompressBuffer;
04908     t = AR.CompressPointer;
04909     i = *m;
04910     NCOPY(t,m,i);
04911     oldb = *tstart;
04912     AR.TePos = 0;
04913     AN.TeSuOut = 0;
04914     /*
04915         Status:
04916         First bracket content starts at mstop.
04917         Next term starts at startposition.
04918         Decompression information is in AR.CompressPointer.
04919         The outside of the bracket runs from AR.CompressBuffer+1 to mstop.
04920     */
04921     for(;;) {
04922         *tstart = *(AR.CompressPointer)-decr;
04923         AR.CompressPointer = AR.CompressPointer+AR.CompressPointer[0];
04924         if ( InsertTerm(BHEAD term,0,AM.rbufnum,tstart,termout,0) < 0 ) {
04925             goto DefCall;
04926         }
04927         *tstart = oldb;
04928         AT.WorkPointer = termout + *termout;
04929         if ( Generator(BHEAD termout,level) ) goto DefCall;
04930         AR.CompressPointer = oldipointer;
04931         AT.WorkPointer = termout;
04932         retval = GetOneTerm(BHEAD AT.WorkPointer,AR.infile,&startposition,0);
04933         if ( retval >= 0 ) AR.CompressPointer = oldipointer;
04934         if ( retval <= 0 ) break;
04935         t = AR.CompressPointer;
04936         if ( *t < (1 + decr + ABS(*(t+*t-1))) ) break;
04937         t++;
04938         m = AR.CompressBuffer+1;
04939         while ( m < mstop ) {
04940             if ( *m != *t ) goto Thatsit;
04941             m++; t++;
04942         }
04943     }
04944     Thatsit;;
04945     /*
04946         Finished. Reposition the file, restore information and return.
04947     */
04948     if ( AR.infile->handle < 0 ) AR.infile->POfill = oldPOfill;
04949     AR.DeferFlag = 1;
04950     AR.GetOneFile = oldGetOneFile;
04951     AT.WorkPointer = oldwork;
04952     return(0);
04953 DefCall:;
04954     MLOCK(ErrorMessageLock);
04955     MesCall("Deferred");
04956     MUNLOCK(ErrorMessageLock);
04957     SETERROR(-1)
04958 }
04959
04960 /*
04961     #] Deferred :
04962     #[ PrepPoly :          WORD PrepPoly(term,par)
04963 */
04986 int PrepPoly(PHEAD WORD *term,WORD par)
04987 {

```



```

04988     GETBIDENTITY
04989     WORD count = 0, i, jcoef, ncoef;
04990     WORD *t, *m, *r, *tstop, *poly = 0, *v, *w, *vv, *ww;
04991     WORD *oldworkpointer = AT.WorkPointer;
04992 /*
04993     The problem here is that the function will be forced into 'long'
04994     notation. After this -SNUMBER,1 becomes 6,0,4,1,1,3 and the
04995     pattern matcher cannot match a short 1 with a long 1.
04996     But because this is an undocumented feature for very special
04997     purposes, we don't do anything about it. (30-aug-2011)
04998 */
04999     if ( AR.PolyFunType == 2 && AR.PolyFunExp != 2 ) {
05000         WORD oldtype = AR.SortType;
05001         AR.SortType = SORTHIGHFIRST;
05002         if ( poly_ratfun_normalize(BHEAD term) != 0 ) Terminate(-1);
05003 /*         if ( ReadPolyRatFun(BHEAD term) != 0 ) Terminate(-1); */
05004         oldworkpointer = AT.WorkPointer;
05005         AR.SortType = oldtype;
05006     }
05007     AT.PolyAct = 0;
05008     t = term;
05009     GETSTOP(t,tstop);
05010     t++;
05011     while ( t < tstop ) {
05012         if ( *t == AR.PolyFun ) {
05013             if ( count > 0 ) return(0);
05014             poly = t;
05015             count++;
05016         }
05017         t += t[1];
05018     }
05019     r = m = term + *term;
05020     i = ABS(m[-1]);
05021     if ( par > 0 ) {
05022         if ( count == 0 ) return(0);
05023         else if ( AR.PolyFunType == 1 || (AR.PolyFunType == 2 && AR.PolyFunExp == 2) )
05024             goto DoOne;
05025         else if ( AR.PolyFunType == 2 )
05026             goto DoTwo;
05027         else
05028             goto DoError;
05029     }
05030     else if ( count == 0 ) {
05031 /*
05032         #[ Create a PolyFun :
05033 */
05034         poly = t = tstop;
05035         if ( i == 3 && m[-2] == 1 && (m[-3]&MAXPOSITIVE) == m[-3] ) {
05036             *m++ = AR.PolyFun;
05037             if ( AR.PolyFunType == 1 || (AR.PolyFunType == 2 && AR.PolyFunExp == 2) ) {
05038                 *m++ = FUNHEAD+2;
05039                 FILLFUN(m)
05040                 *m++ = -SNUMBER;
05041                 *m = m[-2-FUNHEAD] < 0 ? -m[-4-FUNHEAD]: m[-4-FUNHEAD];
05042                 m++;
05043             }
05044             else if ( AR.PolyFunType == 2 ) {
05045                 *m++ = FUNHEAD+4;
05046                 FILLFUN(m)
05047                 *m++ = -SNUMBER;
05048                 *m = m[-2-FUNHEAD] < 0 ? -m[-4-FUNHEAD]: m[-4-FUNHEAD];
05049                 m++;
05050                 *m++ = -SNUMBER;
05051                 *m++ = 1;
05052             }
05053         }
05054         else {
05055             WORD *vm;
05056             r = tstop;
05057             if ( AR.PolyFunType == 1 || (AR.PolyFunType == 2 && AR.PolyFunExp == 2) ) {
05058                 *m++ = AR.PolyFun;
05059                 *m++ = FUNHEAD+ARGHEAD+i+1;
05060                 FILLFUN(m)
05061                 *m++ = ARGHEAD+i+1;
05062                 *m++ = 0;
05063                 FILLARG(m)
05064                 *m++ = i+1;
05065                 NCOPY(m,r,i);
05066             }
05067             else if ( AR.PolyFunType == 2 ) {
05068                 WORD *num, *den, size, sign, sizenum, sizeden;
05069                 if ( m[-1] < 0 ) { sign = -1; size = -m[-1]; }
05070                 else { sign = 1; size = m[-1]; }
05071                 num = m - size; size = (size-1)/2; den = num + size;
05072                 sizenum = size; while ( num[sizenum-1] == 0 ) sizenum--;
05073                 sizeden = size; while ( den[sizeden-1] == 0 ) sizeden--;
05074                 v = m;

```

```

05075         AT.PolyAct = WORDDIF(v,term);
05076         *v++ = AR.PolyFun;
05077         v++;
05078         FILLFUN(v);
05079         vm = v;
05080         *v++ = ARGHEAD+2*sizenum+2;
05081         *v++ = 0;
05082         FILLARG(v);
05083         *v++ = 2*sizenum+2;
05084         for ( i = 0; i < sizenum; i++ ) *v++ = num[i];
05085         *v++ = 1;
05086         for ( i = 1; i < sizenum; i++ ) *v++ = 0;
05087         *v++ = sign*(2*sizenum+1);
05088         if ( ToFast(vm,vm) ) v = vm+2;
05089         vm = v;
05090         *v++ = ARGHEAD+2*sizeden+2;
05091         *v++ = 0;
05092         FILLARG(v);
05093         *v++ = 2*sizeden+2;
05094         for ( i = 0; i < sizeden; i++ ) *v++ = den[i];
05095         *v++ = 1;
05096         for ( i = 1; i < sizeden; i++ ) *v++ = 0;
05097         *v++ = 2*sizeden+1;
05098         if ( ToFast(vm,vm) ) v = vm+2;
05099         i = v-m;
05100         m[1] = i;
05101         w = num;
05102         NCOPY(w,m,i);
05103         *w++ = 1; *w++ = 1; *w++ = 3; *term = w - term;
05104         return(0);
05105     }
05106 }
05107 /*
05108 #] Create a PolyFun :
05109 */
05110 }
05111 else if ( AR.PolyFunType == 1 || (AR.PolyFunType == 2 && AR.PolyFunExp == 2) ) {
05112     DoOne;
05113 /*
05114 #[ One argument :
05115 */
05116     m = term + *term;
05117     r = poly + poly[1];
05118     if ( ( poly[1] == FUNHEAD+2 && poly[FUNHEAD+1] == 0
05119     && poly[FUNHEAD] == -SNUMBER ) || poly[1] == FUNHEAD ) return(1);
05120     t = poly + FUNHEAD;
05121     if ( t >= r ) return(0);
05122     if ( m[-1] == 3 && *tstop == 1 && tstop[1] == 1 ) {
05123         i = poly[1];
05124         t = poly;
05125         NCOPY(m,t,i);
05126     }
05127     else if ( *t <= -FUNCTION ) {
05128         if ( t+1 < r ) return(0); /* More than one argument */
05129         r = tstop;
05130         *m++ = AR.PolyFun;
05131         *m++ = FUNHEAD*2+ARGHEAD+i+1;
05132         FILLFUN(m)
05133         *m++ = FUNHEAD+ARGHEAD+i+1;
05134         *m++ = 0;
05135         FILLARG(m)
05136         *m++ = FUNHEAD+i+1;
05137         *m++ = -*t++;
05138         *m++ = FUNHEAD;
05139         FILLFUN(m)
05140         NCOPY(m,r,i);
05141     }
05142     else if ( *t < 0 ) {
05143         if ( t+2 < r ) return(0); /* More than one argument */
05144         r = tstop;
05145         if ( *t == -SNUMBER ) {
05146             if ( t[1] == 0 ) return(1); /* Term should be zero now */
05147             *m = AR.PolyFun;
05148             w = m+1;
05149             m += FUNHEAD+ARGHEAD;
05150             v = m;
05151             *m++ = 5+i;
05152             *m++ = SNUMBER;
05153             *m++ = 4;
05154             *m++ = t[1];
05155             *m++ = 1;
05156             NCOPY(m,r,i);
05157             if ( m >= AT.WorkSpace && m < AT.WorkTop )
05158                 AT.WorkPointer = m;
05159             if ( Normalize(BHEAD v) ) Terminate(-1);
05160             AT.WorkPointer = oldworkpointer;
05161             m = w;

```

```

05162         if ( *v == 4 && v[2] == 1 && (v[1]&MAXPOSITIVE) == v[1] ) {
05163             *m++ = FUNHEAD+2;
05164             FILLFUN(m)
05165             *m++ = -SNUMBER;
05166             *m++ = v[3] < 0 ? -v[1] : v[1];
05167         }
05168         else if ( *v == 0 ) return(1);
05169         else {
05170             *m++ = FUNHEAD+ARGHEAD+*v;
05171             FILLFUN(m)
05172             *m++ = ARGHEAD+*v;
05173             *m++ = 0;
05174             FILLARG(m)
05175             m = v + *v;
05176         }
05177     }
05178     else if ( *t == -SYMBOL ) {
05179         *m++ = AR.PolyFun;
05180         *m++ = FUNHEAD+ARGHEAD+5+i;
05181         FILLFUN(m)
05182         *m++ = ARGHEAD+5+i;
05183         *m++ = 0;
05184         FILLARG(m)
05185         *m++ = 5+i;
05186         *m++ = SYMBOL;
05187         *m++ = 4;
05188         *m++ = t[1];
05189         *m++ = 1;
05190         NCOPY(m,r,i);
05191     }
05192     else return(0);          /* Not symbol-like */
05193 }
05194 else {
05195     if ( t + *t < r ) return(0); /* More than one argument */
05196     i = m[-1];
05197     *m++ = AR.PolyFun;
05198     w = m;
05199     m += ARGHEAD+FUNHEAD-1;
05200     t += ARGHEAD;
05201     jcoef = i < 0 ? (i+1)>1:(i-1)>1;
05202     v = t;
05203     /*
05204     Test now the scalar nature of the argument.
05205     No indices allowed.
05206     */
05207     while ( t < r ) {
05208         WORD *vstop;
05209         vv = t + *t;
05210         vstop = vv - ABS(vv[-1]);
05211         t++;
05212         while( t < vstop ) {
05213             if ( *t == INDEX ) return(0);
05214             t += t[1];
05215         }
05216         t = vv;
05217     }
05218     /*
05219     Now multiply each term by the coefficient.
05220     */
05221     t = v;
05222     while ( t < r ) {
05223         ww = m;
05224         v = t + *t;
05225         ncoef = v[-1];
05226         vv = v - ABS(ncoef);
05227         if ( ncoef < 0 ) ncoef++;
05228         else ncoef--;
05229         ncoef >= 1;
05230         while ( t < vv ) *m++ = *t++;
05231         if ( MulRat(BHEAD (UWORD *)vv,ncoef, (UWORD *)tstop,jcoef,
05232             (UWORD *)m,&ncoef) ) Terminate(-1);
05233         ncoef *= 2;
05234         m += ABS(ncoef);
05235         if ( ncoef < 0 ) ncoef--;
05236         else ncoef++;
05237         *m++ = ncoef;
05238         *ww = WORDDIF(m,ww);
05239         if ( AN.ncmod != 0 ) {
05240             if ( Modulus(ww) ) Terminate(-1);
05241             if ( *ww == 0 ) return(1);
05242             m = ww + *ww;
05243         }
05244         t = v;
05245     }
05246     *w = (WORDDIF(m,w))+1;
05247     w[FUNHEAD-1] = w[0] - FUNHEAD;
05248     w[FUNHEAD] = 0;

```

```

05249         w[1] = 0; /* omission survived for years. 23-mar-2006 JV */
05250         w += FUNHEAD-1;
05251         if ( ToFast(w,w) ) {
05252             if ( *w <= -FUNCTION ) { w[-FUNHEAD+1] = FUNHEAD+1; m = w+1; }
05253             else { w[-FUNHEAD+1] = FUNHEAD+2; m = w+2; }
05254         }
05255     }
05256 }
05257 t = poly + poly[1];
05258 while ( t < tstop ) *poly++ = *t++;
05259 /*
05260     #] One argument :
05261 */
05262 }
05263 else if ( AR.PolyFunType == 2 ) {
05264     DoTwo;;
05265 /*
05266     #[ Two arguments :
05267 */
05268     WORD *num, *den, size, sign, sizenum, sizeden;
05269 /*
05270     First make sure that the PolyFun is last
05271 */
05272     m = term + *term;
05273     if ( poly + poly[1] < tstop ) {
05274         for ( i = 0; i < poly[1]; i++ ) m[i] = poly[i];
05275         t = poly; v = poly + poly[1];
05276         while ( v < tstop ) *t++ = *v++;
05277         poly = t;
05278         for ( i = 0; i < m[1]; i++ ) t[i] = m[i];
05279         t += m[1];
05280     }
05281     AT.PolyAct = WORDDIFF(poly,term);
05282 /*
05283     If needed we convert the coefficient into a PolyRatFun and then
05284     we call poly_ratfun_normalize
05285 */
05286     if ( m[-1] == 3 && m[-2] == 1 && m[-3] == 1 ) return(0);
05287     if ( AR.PolyFunExp != 1 ) {
05288         if ( m[-1] < 0 ) { sign = -1; size = -m[-1]; } else { sign = 1; size = m[-1]; }
05289         num = m - size; size = (size-1)/2; den = num + size;
05290         sizenum = size; while ( num[sizenum-1] == 0 ) sizenum--;
05291         sizeden = size; while ( den[sizeden-1] == 0 ) sizeden--;
05292         v = m;
05293         *v++ = AR.PolyFun;
05294         *v++ = FUNHEAD + 2*(ARGHEAD+sizenum+sizeden+2);
05295         /*
05296             *v++ = MUSTCLEANPRF; */
05297         *v++ = 0;
05298         FILLFUN3(v);
05299         *v++ = ARGHEAD+2*sizenum+2;
05300         *v++ = 0;
05301         FILLARG(v);
05302         *v++ = 2*sizenum+2;
05303         for ( i = 0; i < sizenum; i++ ) *v++ = num[i];
05304         *v++ = 1;
05305         for ( i = 1; i < sizenum; i++ ) *v++ = 0;
05306         *v++ = sign*(2*sizenum+1);
05307         *v++ = ARGHEAD+2*sizeden+2;
05308         *v++ = 0;
05309         FILLARG(v);
05310         *v++ = 2*sizeden+2;
05311         for ( i = 0; i < sizeden; i++ ) *v++ = den[i];
05312         *v++ = 1;
05313         for ( i = 1; i < sizeden; i++ ) *v++ = 0;
05314         *v++ = 2*sizeden+1;
05315         w = num;
05316         i = v - m;
05317         NCOPY(w,m,i);
05318     }
05319     else {
05320         w = m-ABS(m[-1]);
05321     }
05322     *w++ = 1; *w++ = 1; *w++ = 3; *term = w - term;
05323     {
05324         WORD oldtype = AR.SortType;
05325         AR.SortType = SORTHIGHFIRST;
05326         if ( count > 0 )
05327             poly_ratfun_normalize(BHEAD term);
05328         else
05329             ReadPolyRatFun(BHEAD term);
05330     }
05331     poly_ratfun_normalize(BHEAD term);
05332     oldworkpointer = AT.WorkPointer; /*
05333     AR.SortType = oldtype;
05334 */
05335 }

```

```

05336         goto endofit;
05337 /*
05338     #] Two arguments :
05339 */
05340     }
05341     else {
05342         DoError;;
05343         MLOCK(ErrorMessageLock);
05344         MesPrint("Illegal value for PolyFunType in PrepPoly");
05345         MUNLOCK(ErrorMessageLock);
05346         Terminate(-1);
05347     }
05348     r = term + *term;
05349     AT.PolyAct = WORDDIF(poly,term);
05350     while ( r < m ) *poly++ = *r++;
05351     *poly++ = 1;
05352     *poly++ = 1;
05353     *poly++ = 3;
05354     *term = WORDDIF(poly,term);
05355 endofit:;
05356     return(0);
05357 }
05358
05359 /*
05360     #] PrepPoly :
05361     #[ PolyFunMul :          WORD PolyFunMul(term)
05362 */
05374 int PolyFunMul(PHEAD WORD *term)
05375 {
05376     GETBIDENTITY
05377     WORD *t, *fun1, *fun2, *t1, *t2, *m, *w, *ww, *tt1, *tt2, *tt4, *arg1, *arg2;
05378     WORD *tstop, i, dirty = 0, OldPolyFunPow = AR.PolyFunPow, minp1, minp2;
05379     WORD n1, n2, i1, i2, l1, l2, l3, l4, action = 0, noac = 0;
05380     int retval = 0;
05381     if ( AR.PolyFunType == 2 && AR.PolyFunExp == 1 ) {
05382         WORD pow = 0, pow1;
05383         t = term + 1; t1 = term + *term; t1 -= ABS(t1[-1]);
05384         w = t;
05385         while ( t < t1 ) {
05386             if ( *t != AR.PolyFun ) {
05387 SkipFun:
05388                 if ( t == w ) { t += t[1]; w = t; }
05389                 else { i = t[1]; NCOPY(w,t,i) }
05390                 continue;
05391             }
05392             pow1 = 0;
05393             t2 = t + t[1]; t += FUNHEAD;
05394             if ( *t < 0 ) {
05395                 if ( *t == -SYMBOL && t[1] == AR.PolyFunVar ) pow1++;
05396                 else if ( *t != -SNUMBER ) goto NoLegal;
05397                 t += 2;
05398             }
05399             else if ( t[0] == ARGHEAD+8 && t[ARGHEAD] == 8
05400 && t[ARGHEAD+1] == SYMBOL && t[ARGHEAD+3] == AR.PolyFunVar
05401 && t[ARGHEAD+5] == 1 && t[ARGHEAD+6] == 1 && t[ARGHEAD+7] == 3 ) {
05402                 pow1 += t[ARGHEAD+4];
05403                 t += *t;
05404             }
05405             else {
05406 NoLegal:
05407                 MLOCK(ErrorMessageLock);
05408                 MesPrint("Illegal term with divergence in PolyRatFun");
05409                 MesCall("PolyFunMul");
05410                 MUNLOCK(ErrorMessageLock);
05411                 Terminate(-1);
05412             }
05413             if ( *t < 0 ) {
05414                 if ( *t == -SYMBOL && t[1] == AR.PolyFunVar ) pow1--;
05415                 else if ( *t != -SNUMBER ) goto NoLegal;
05416                 t += 2;
05417             }
05418             else if ( t[0] == ARGHEAD+8 && t[ARGHEAD] == 8
05419 && t[ARGHEAD+1] == SYMBOL && t[ARGHEAD+3] == AR.PolyFunVar
05420 && t[ARGHEAD+5] == 1 && t[ARGHEAD+6] == 1 && t[ARGHEAD+7] == 3 ) {
05421                 pow1 -= t[ARGHEAD+4];
05422                 t += *t;
05423             }
05424             else goto NoLegal;
05425             if ( t == t2 ) pow += pow1;
05426             else goto SkipFun;
05427         }
05428         m = w;
05429         *w++ = AR.PolyFun; *w++ = 0; FILLFUN(w);
05430         if ( pow > 1 ) {
05431             *w++ = 8+ARGHEAD; *w++ = 0; FILLARG(w);
05432             *w++ = 8; *w++ = SYMBOL; *w++ = 4; *w++ = AR.PolyFunVar; *w++ = pow;
05433             *w++ = 1; *w++ = 1; *w++ = 3; *w++ = -SNUMBER; *w++ = 1;

```

```

05434     }
05435     else if ( pow == 1 ) {
05436         *w++ = -SYMBOL; *w++ = AR.PolyFunVar; *w++ = -SNUMBER; *w++ = 1;
05437     }
05438     else if ( pow < -1 ) {
05439         *w++ = -SNUMBER; *w++ = 1; *w++ = 8+ARGHEAD; *w++ = 0; FILLARG(w);
05440         *w++ = 8; *w++ = SYMBOL; *w++ = 4; *w++ = AR.PolyFunVar; *w++ = -pow;
05441         *w++ = 1; *w++ = 1; *w++ = 3;
05442     }
05443     else if ( pow == -1 ) {
05444         *w++ = -SNUMBER; *w++ = 1; *w++ = -SYMBOL; *w++ = AR.PolyFunVar;
05445     }
05446     else {
05447         *w++ = -SNUMBER; *w++ = 1; *w++ = -SNUMBER; *w++ = 1;
05448     }
05449     m[1] = w - m;
05450     *w++ = 1; *w++ = 1; *w++ = 3;
05451     *term = w - term;
05452     if ( w > AT.WorkSpace && w < AT.WorkTop ) AT.WorkPointer = w;
05453     return(0);
05454 }
05455 ReStart:
05456 if ( AR.PolyFunType == 2 && ( ( AR.PolyFunExp != 2 )
05457 || ( AR.PolyFunExp == 2 && AN.PolyNormFlag > 1 ) ) ) {
05458     WORD count1 = 0, count2 = 0, count3;
05459     WORD oldtype = AR.SortType;
05460     t = term + 1; t1 = term + *term; t1 -= ABS(t1[-1]);
05461     while ( t < t1 ) {
05462         if ( *t == AR.PolyFun ) {
05463             if ( t[2] && dirty == 0 ) { /* Any dirty flag on? */
05464                 dirty = 1;
05465                 /* ReadPolyRatFun(BHEAD term); */
05466                 /* ToPolyFunGeneral(BHEAD term); */
05467                 poly_ratfun_normalize(BHEAD term);
05468                 if ( term[0] == 0 ) return(0);
05469                 count1 = 0;
05470                 action++;
05471                 goto ReStart;
05472             }
05473             t2 = t + t[1]; tt2 = t+FUNHEAD; count3 = 0;
05474             while ( tt2 < t2 ) { count3++; NEXTARG(tt2); }
05475             if ( count3 == 2 ) {
05476                 count1++;
05477                 if ( ( t[2] & MUSTCLEANPRF ) != 0 ) { /* Better civilize this guy */
05478                     action++;
05479                     w = AT.WorkPointer;
05480                     AR.SortType = SORTHIGHFIRST;
05481                     t2 = t + t[1]; tt2 = t+FUNHEAD;
05482                     while ( tt2 < t2 ) {
05483                         if ( *tt2 > 0 ) {
05484                             tt4 = tt2; tt1 = tt2 + ARGHEAD; tt2 += *tt2;
05485                             NewSort(BHEAD0);
05486                             while ( tt1 < tt2 ) {
05487                                 i = *tt1; ww = w; NCOPY(ww,tt1,i);
05488                                 AT.WorkPointer = ww;
05489                                 Normalize(BHEAD w);
05490                                 StoreTerm(BHEAD w);
05491                             }
05492                             EndSort(BHEAD w,1);
05493                             ww = w; while ( *ww ) ww += *ww;
05494                             if ( ww-w != *tt4-ARGHEAD ) { /* Little problem */
05495                                 /*
05496                                     Solution: brute force copy
05497                                     Maybe it will never come here????
05498                                 */
05499                                 WORD *r1 = TermMalloc("PolyFunMul");
05500                                 WORD ii = (ww-w)-(tt4-ARGHEAD); /* increment */
05501                                 WORD *r2 = tt4+ARGHEAD, *r3, *r4 = r1;
05502                                 i = r2 - term; r3 = term; NCOPY(r4,r3,i);
05503                                 i = ww-w; ww = w; NCOPY(r4,ww,i);
05504                                 r3 = tt2; i = term+*term-tt2; NCOPY(r4,r3,i);
05505                                 *r1 = i = r4-r1; r4 = term; r3 = r1;
05506                                 NCOPY(r4,r3,i);
05507                                 t[1] += ii; t1 += ii; *tt4 += ii;
05508                                 tt2 = tt4 + *tt4;
05509                                 TermFree(r1,"PolyFunMul");
05510                             }
05511                         }
05512                         else {
05513                             i = ww-w; ww = w; tt1 = tt4+ARGHEAD;
05514                             NCOPY(tt1,ww,i);
05515                             AT.WorkPointer = w;
05516                         }
05517                     }
05518                     else if ( *tt2 <= -FUNCTION ) tt2++;
05519                     else tt2 += 2;
05520                 }
05521             }
05522             AR.SortType = oldtype;

```

```

05521         }
05522     }
05523 }
05524     t += t[1];
05525 }
05526 if ( count1 <= 1 ) { goto checkaction; }
05527 if ( AR.PolyFunExp == 1 ) {
05528     t = term + *term; t -= ABS(t[-1]);
05529     *t++ = 1; *t++ = 1; *t++ = 3; *term = t - term;
05530 }
05531 {
05532     AR.SortType = SORTHIGHFIRST;
05533     /* retval = ReadPolyRatFun(BHEAD term); */
05534     /* ToPolyFunGeneral(BHEAD term); */
05535     retval = poly_ratfun_normalize(BHEAD term);
05536     if ( *term == 0 ) return(retval);
05537     AR.SortType = oldtype;
05538 }
05539
05540 t = term + 1; t1 = term + *term; t1 -= ABS(t1[-1]);
05541 while ( t < t1 ) {
05542     if ( *t == AR.PolyFun ) {
05543         t2 = t + t[1]; tt2 = t+FUNHEAD; count3 = 0;
05544         while ( tt2 < t2 ) { count3++; NEXTARG(tt2); }
05545         if ( count3 == 2 ) {
05546             count2++;
05547         }
05548     }
05549     t += t[1];
05550 }
05551 if ( count1 >= count2 ) {
05552     t = term + 1;
05553     while ( t < t1 ) {
05554         if ( *t == AR.PolyFun ) {
05555             t2 = t;
05556             t = t + t[1];
05557             t2[2] |= (DIRTYFLAG|MUSTCLEANPRF);
05558             t2 += FUNHEAD;
05559             while ( t2 < t ) {
05560                 if ( *t2 > 0 ) t2[1] = DIRTYFLAG;
05561                 NEXTARG(t2);
05562             }
05563         }
05564         else t += t[1];
05565     }
05566 }
05567
05568 w = term + *term;
05569 if ( w > AT.WorkSpace && w < AT.WorkTop ) AT.WorkPointer = w;
05570 checkaction:
05571 if ( action ) retval = action;
05572 return(retval);
05573 }
05574 retry:
05575 if ( term >= AT.WorkSpace && term+*term < AT.WorkTop )
05576     AT.WorkPointer = term + *term;
05577 GETSTOP(term,tstop);
05578 t = term+1;
05579 while ( *t != AR.PolyFun && t < tstop ) t += t[1];
05580 while ( t < tstop && *t == AR.PolyFun ) {
05581     if ( t[1] > FUNHEAD ) {
05582         if ( t[FUNHEAD] < 0 ) {
05583             if ( t[FUNHEAD] <= -FUNCTION && t[1] == FUNHEAD+1 ) break;
05584             if ( t[FUNHEAD] > -FUNCTION && t[1] == FUNHEAD+2 ) {
05585                 if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] == 0 ) {
05586                     *term = 0;
05587                     return(0);
05588                 }
05589                 break;
05590             }
05591         }
05592         else if ( t[FUNHEAD] == t[1] - FUNHEAD ) break;
05593     }
05594     noac = 1;
05595     t += t[1];
05596 }
05597 if ( *t != AR.PolyFun || t >= tstop ) goto done;
05598 fun1 = t;
05599 t += t[1];
05600 while ( t < tstop && *t == AR.PolyFun ) {
05601     if ( t[1] > FUNHEAD ) {
05602         if ( t[FUNHEAD] < 0 ) {
05603             if ( t[FUNHEAD] <= -FUNCTION && t[1] == FUNHEAD+1 ) break;
05604             if ( t[FUNHEAD] > -FUNCTION && t[1] == FUNHEAD+2 ) {
05605                 if ( t[FUNHEAD] == -SNUMBER && t[FUNHEAD+1] == 0 ) {
05606                     *term = 0;
05607                     return(0);

```

```

05608             }
05609             break;
05610         }
05611     }
05612     else if ( t[FUNHEAD] == t[1] - FUNHEAD ) break;
05613 }
05614 noac = 1;
05615 t += t[1];
05616 }
05617 if ( *t != AR.PolyFun || t >= tstop ) goto done;
05618 fun2 = t;
05619 /*
05620 We have two functions of the proper type.
05621 Count terms (needed for the specials)
05622 */
05623 t = fun1 + FUNHEAD;
05624 if ( *t < 0 ) {
05625     n1 = 1; arg1 = AT.WorkPointer;
05626     ToGeneral(t,arg1,1);
05627     AT.WorkPointer = arg1 + *arg1;
05628 }
05629 else {
05630     t += ARGHEAD;
05631     n1 = 0; t1 = fun1 + fun1[1]; arg1 = t;
05632     while ( t < t1 ) { n1++; t += *t; }
05633 }
05634 t = fun2 + FUNHEAD;
05635 if ( *t < 0 ) {
05636     n2 = 1; arg2 = AT.WorkPointer;
05637     ToGeneral(t,arg2,1);
05638     AT.WorkPointer = arg2 + *arg2;
05639 }
05640 else {
05641     t += ARGHEAD;
05642     n2 = 0; t2 = fun2 + fun2[1]; arg2 = t;
05643     while ( t < t2 ) { n2++; t += *t; }
05644 }
05645 /*
05646 Now we can start the multiplications. We first multiply the terms
05647 without coefficients, then normalize, and finally put the coefficients
05648 in place. This is because one has often truncated series and the
05649 high powers may get killed, while their coefficients are the most
05650 expensive ones.
05651 Note: We may run into fun(-SNUMBER,value)
05652 */
05653 w = AT.WorkPointer;
05654 NewSort(BHEAD0);
05655 if ( AR.PolyFunType == 2 && AR.PolyFunExp == 2 ) {
05656     AT.TrimPower = 1;
05657 /*
05658 We have to find the lowest power in both polynomials.
05659 This will be needed to temporarily correct the AR.PolyFunPow
05660 */
05661 minp1 = MAXPOWER;
05662 for ( t1 = arg1, i1 = 0; i1 < n1; i1++, t1 += *t1 ) {
05663     if ( *t1 == 4 ) {
05664         if ( minp1 > 0 ) minp1 = 0;
05665     }
05666     else if ( ABS(t1[*t1-1]) == (*t1-1) ) {
05667         if ( minp1 > 0 ) minp1 = 0;
05668     }
05669     else {
05670         if ( t1[1] == SYMBOL && t1[2] == 4 && t1[3] == AR.PolyFunVar ) {
05671             if ( t1[4] < minp1 ) minp1 = t1[4];
05672         }
05673         else {
05674             MesPrint("Illegal term in expanded polyratfun.");
05675             goto PolyCall;
05676         }
05677     }
05678 }
05679 minp2 = MAXPOWER;
05680 for ( t2 = arg2, i2 = 0; i2 < n2; i2++, t2 += *t2 ) {
05681     if ( *t2 == 4 ) {
05682         if ( minp2 > 0 ) minp2 = 0;
05683     }
05684     else if ( ABS(t2[*t2-1]) == (*t2-1) ) {
05685         if ( minp2 > 0 ) minp2 = 0;
05686     }
05687     else {
05688         if ( t2[1] == SYMBOL && t2[2] == 4 && t2[3] == AR.PolyFunVar ) {
05689             if ( t2[4] < minp2 ) minp2 = t2[4];
05690         }
05691         else {
05692             MesPrint("Illegal term in expanded polyratfun.");
05693             goto PolyCall;
05694         }
05695     }
05696 }

```



```

05695     }
05696     }
05697     AR.PolyFunPow += minp1+minp2;
05698 }
05699 for ( t1 = arg1, i1 = 0; i1 < n1; i1++, t1 += *t1 ) {
05700 for ( t2 = arg2, i2 = 0; i2 < n2; i2++, t2 += *t2 ) {
05701     m = w;
05702     m++;
05703     GETSTOP(t1,tt1);
05704     t = t1 + 1;
05705     while ( t < tt1 ) *m++ = *t++;
05706     GETSTOP(t2,tt2);
05707     t = t2+1;
05708     while ( t < tt2 ) *m++ = *t++;
05709     *m++ = 1; *m++ = 1; *m++ = 3; *w = WORDDIF(m,w);
05710     AT.WorkPointer = m;
05711     if ( Normalize(BHEAD w) ) { LowerSortLevel(); goto PolyCall; }
05712     if ( *w ) {
05713         m = w + *w;
05714         if ( m[-1] != 3 || m[-2] != 1 || m[-3] != 1 ) {
05715             l3 = REDLENG(m[-1]);
05716             m -= ABS(m[-1]);
05717             t = t1 + *t1 - 1;
05718             l1 = REDLENG(*t);
05719             if ( MulRat(BHEAD (UWORD *)m,l3,(UWORD *)tt1,l1,(UWORD *)m,&l4) ) {
05720                 LowerSortLevel(); goto PolyCall; }
05721             if ( AN.ncmod != 0 && TakeModulus((UWORD *)m,&l4,AC.cmod,AN.ncmod,UNPACK|AC.modmode) )
05722 {
05723                 LowerSortLevel(); goto PolyCall; }
05724             if ( l4 == 0 ) continue;
05725             t = t2 + *t2 - 1;
05726             l2 = REDLENG(*t);
05727             if ( MulRat(BHEAD (UWORD *)m,l4,(UWORD *)tt2,l2,(UWORD *)m,&l3) ) {
05728                 LowerSortLevel(); goto PolyCall; }
05729             if ( AN.ncmod != 0 && TakeModulus((UWORD *)m,&l3,AC.cmod,AN.ncmod,UNPACK|AC.modmode) )
05730 {
05731                 LowerSortLevel(); goto PolyCall; }
05732             }
05733             else {
05734                 m -= 3;
05735                 t = t1 + *t1 - 1;
05736                 l1 = REDLENG(*t);
05737                 t = t2 + *t2 - 1;
05738                 l2 = REDLENG(*t);
05739                 if ( MulRat(BHEAD (UWORD *)tt1,l1,(UWORD *)tt2,l2,(UWORD *)m,&l3) ) {
05740                     LowerSortLevel(); goto PolyCall; }
05741                 if ( AN.ncmod != 0 && TakeModulus((UWORD *)m,&l3,AC.cmod,AN.ncmod,UNPACK|AC.modmode) )
05742 {
05743                     LowerSortLevel(); goto PolyCall; }
05744                 }
05745                 if ( l3 == 0 ) continue;
05746                 l3 = INCLENG(l3);
05747                 m += ABS(l3);
05748                 m[-1] = l3;
05749                 *w = WORDDIF(m,w);
05750                 AT.WorkPointer = m;
05751                 if ( StoreTerm(BHEAD w) ) { LowerSortLevel(); goto PolyCall; }
05752             }
05753             }
05754             if ( EndSort(BHEAD w,0) < 0 ) goto PolyCall;
05755             AR.PolyFunPow = OldPolyFunPow;
05756             AT.TrimPower = 0;
05757             if ( *w == 0 ) {
05758                 *term = 0;
05759                 return(0);
05760             }
05761             t = w;
05762             while ( *t ) t += *t;
05763             AT.WorkPointer = t;
05764             n1 = WORDDIF(t,w);
05765             t1 = term;
05766             while ( t1 < fun1 ) *t++ = *t1++;
05767             t2 = t;
05768             *t++ = AR.PolyFun;
05769             *t++ = FUNHEAD+ARGHEAD+n1;
05770             *t++ = 0;
05771             FILLFUN3(t)
05772             *t++ = ARGHEAD+n1;
05773             *t++ = 0;
05774             FILLARG(t)
05775             NCOPY(t,w,n1);
05776             if ( ToFast(t2+FUNHEAD,t2+FUNHEAD) ) {
05777                 if ( t2[FUNHEAD] > -FUNCTION ) t2[1] = FUNHEAD+2;
05778                 else t2[FUNHEAD] = FUNHEAD+1;
05779                 t = t2 + t2[1];
05780             }
05781         }
05782     }

```

```


05779     t1 = fun1 + fun1[1];
05780     while ( t1 < fun2 ) *t++ = *t1++;
05781     t1 = fun2 + fun2[1];
05782     t2 = term + *term;
05783     while ( t1 < t2 ) *t++ = *t1++;
05784     *AT.WorkPointer = n1 = WORDDIFF(t,AT.WorkPointer);
05785     if ( n1*((LONG)sizeof(WORD)) > AM.MaxTer ) {
05786         MLOCK(ErrorMessageLock);
05787         MesPrint("Term too complex (%d words). MaxTermSize (%l words) is too small.", n1,
AM.MaxTer/(LONG)sizeof(WORD) );
05788         goto PolyCall2;
05789     }
05790     m = term; t = AT.WorkPointer;
05791     NCOPY(m,t,n1);
05792     action++;
05793     goto retry;
05794 done:
05795     AT.WorkPointer = term + *term;
05796     if ( action && noac ) {
05797         if ( Normalize(BHEAD term) ) goto PolyCall;
05798         AT.WorkPointer = term + *term;
05799     }
05800     return(0);
05801 PolyCall:;
05802     MLOCK(ErrorMessageLock);
05803 PolyCall2:;
05804     AR.PolyFunPow = OldPolyFunPow;
05805     MesCall("PolyFunMul");
05806     MUNLOCK(ErrorMessageLock);
05807     SETERROR(-1)
05808 }
05809
05810 /*
05811     #] PolyFunMul :
05812     #] Processor :
05813 */

```

4.119 ratio.c File Reference

```
#include "form3.h"
```

Include dependency graph for ratio.c:

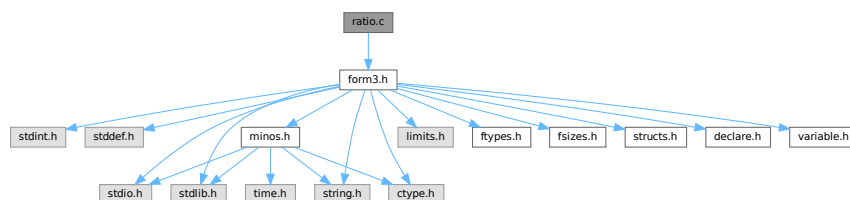

Data Structures

- struct [ARGBUFFER](#)

Functions

- int [RatioFind](#) (PHEAD WORD *term, WORD *params)
- int [RatioGen](#) (PHEAD WORD *term, WORD *params, WORD num, WORD level)
- int [BinomGen](#) (PHEAD WORD *term, WORD level, WORD **tstops, WORD x1, WORD x2, WORD pow1, WORD pow2, WORD sign, UWORD *coef, WORD ncoef)
- int [DoSumF1](#) (PHEAD WORD *term, WORD *params, WORD replac, WORD level)
- int [Glue](#) (PHEAD WORD *term1, WORD *term2, WORD *sub, WORD insert)

- int [DoSumF2](#) (PHEAD WORD *term, WORD *params, WORD replac, WORD level)
- int [GCDfunction](#) (PHEAD WORD *term, WORD level)
- WORD * [GCDfunction3](#) (PHEAD WORD *in1, WORD *in2)
- WORD * [PutExtraSymbols](#) (PHEAD WORD *in, WORD startebuf, int *actionflag)
- WORD * [TakeExtraSymbols](#) (PHEAD WORD *in, WORD startebuf)
- WORD * [MultiplyWithTerm](#) (PHEAD WORD *in, WORD *term, WORD par)
- WORD * [TakeContent](#) (PHEAD WORD *in, WORD *term)
- int [MergeSymbolLists](#) (PHEAD WORD *old, WORD *extra, int par)
- int [MergeDotproductLists](#) (PHEAD WORD *old, WORD *extra, int par)
- WORD * [CreateExpression](#) (PHEAD WORD nexp)
- int [GCDterms](#) (PHEAD WORD *term1, WORD *term2, WORD *termout)
- int [ReadPolyRatFun](#) (PHEAD WORD *term)
- int [FromPolyRatFun](#) (PHEAD WORD *fun, WORD **numout, WORD **denout)
- WORD * [TakeSymbolContent](#) (PHEAD WORD *in, WORD *term)
- void [GCDclean](#) (PHEAD WORD *num, WORD *den)
- WORD * [PolyDiv](#) (PHEAD WORD *a, WORD *b, char *text)
- int [DIVfunction](#) (PHEAD WORD *term, WORD level, int par)
- WORD * [MULfunc](#) (PHEAD WORD *p1, WORD *p2)
- WORD * [ConvertArgument](#) (PHEAD WORD *arg, int *type)
- int [ExpandRat](#) (PHEAD WORD *fun)
- int [InvPoly](#) (PHEAD WORD *inpoly, WORD maxpow, WORD sym)

Variables

- WORD [divrem](#) [4] = { DIVFUNCTION, REMFUNCTION, INVERSEFUNCTION, MULFUNCTION }
- char * [TheErrorMessage](#) []

4.119.1 Detailed Description

A variety of routines: The ratio command for partial fractioning (rather old. Schoonschip inheritance) The sum routines.

Definition in file [ratio.c](#).

4.119.2 Function Documentation

4.119.2.1 RatioFind()

```
int RatioFind (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line 62 of file [ratio.c](#).

4.119.2.2 RatioGen()

```
int RatioGen (
    PHEAD WORD * term,
    WORD * params,
    WORD num,
    WORD level )
```

Definition at line 170 of file [ratio.c](#).

4.119.2.3 BinomGen()

```
int BinomGen (
    PHEAD WORD * term,
    WORD level,
    WORD ** tstops,
    WORD x1,
    WORD x2,
    WORD pow1,
    WORD pow2,
    WORD sign,
    UWORD * coef,
    WORD ncoef )
```

Definition at line 320 of file [ratio.c](#).

4.119.2.4 DoSumF1()

```
int DoSumF1 (
    PHEAD WORD * term,
    WORD * params,
    WORD replac,
    WORD level )
```

Definition at line 395 of file [ratio.c](#).

4.119.2.5 Glue()

```
int Glue (
    PHEAD WORD * term1,
    WORD * term2,
    WORD * sub,
    WORD insert )
```

Definition at line 461 of file [ratio.c](#).

4.119.2.6 DoSumF2()

```
int DoSumF2 (
    PHEAD WORD * term,
    WORD * params,
    WORD replac,
    WORD level )
```

Definition at line 520 of file [ratio.c](#).

4.119.2.7 GCDfunction()

```
int GCDfunction (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 609 of file [ratio.c](#).

4.119.2.8 GCDfunction3()

```
WORD * GCDfunction3 (
    PHEAD WORD * in1,
    WORD * in2 )
```

Definition at line 1141 of file [ratio.c](#).

4.119.2.9 PutExtraSymbols()

```
WORD * PutExtraSymbols (
    PHEAD WORD * in,
    WORD startebuf,
    int * actionflag )
```

Definition at line 1244 of file [ratio.c](#).

4.119.2.10 TakeExtraSymbols()

```
WORD * TakeExtraSymbols (
    PHEAD WORD * in,
    WORD startebuf )
```

Definition at line 1273 of file [ratio.c](#).

4.119.2.11 MultiplyWithTerm()

```
WORD * MultiplyWithTerm (
    PHEAD WORD * in,
    WORD * term,
    WORD par )
```

Definition at line 1312 of file [ratio.c](#).

4.119.2.12 TakeContent()


```
WORD * TakeContent (
    PHEAD WORD * in,
    WORD * term )
```

Implements part of the old ExecArg in which we take common factors from arguments with more than one term. Here the input is a sequence of terms in 'in' and the answer is a content-free sequence of terms. This sequence has been allocated by the Malloc1 routine in a call to EndSort, unless the expression was already content-free. In that case the input pointer is returned. The content is returned in term. This is supposed to be a separate allocation, made by TermMalloc in the calling routine.

Definition at line 1376 of file [ratio.c](#).

References [GetModInverses\(\)](#).

Here is the call graph for this function:



4.119.2.13 MergeSymbolLists()

```
int MergeSymbolLists (
    PHEAD WORD * old,
    WORD * extra,
    int par )
```

Definition at line 1808 of file [ratio.c](#).

4.119.2.14 MergeDotproductLists()

```
int MergeDotproductLists (
    PHEAD WORD * old,
    WORD * extra,
    int par )
```

Definition at line 1927 of file [ratio.c](#).

4.119.2.15 CreateExpression()

```
WORD * CreateExpression (
    PHEAD WORD nexp )
```

Definition at line 2020 of file [ratio.c](#).

4.119.2.16 GCDterms()

```
int GCDterms (
    PHEAD WORD * term1,
    WORD * term2,
    WORD * termout )
```

Definition at line 2076 of file [ratio.c](#).

4.119.2.17 ReadPolyRatFun()

```
int ReadPolyRatFun (
    PHEAD WORD * term )
```

Definition at line 2264 of file [ratio.c](#).

4.119.2.18 FromPolyRatFun()

```
int FromPolyRatFun (
    PHEAD WORD * fun,
    WORD ** numout,
    WORD ** denout )
```

Definition at line 2383 of file [ratio.c](#).

4.119.2.19 TakeSymbolContent()

```
WORD * TakeSymbolContent (
    PHEAD WORD * in,
    WORD * term )
```

Implements part of the old ExecArg in which we take common factors from arguments with more than one term. We allow only symbols as this code is used for the polyratfun only. We have a special routine, because the generic TakeContent does too much work and speed is at a premium here. Input: *in* is the input expression as a sequence of terms. **Output:** *term*: the content return value: the contentfree expression. it is in new allocation, made by TermMalloc. (should be in a TermMalloc space?)

Definition at line 2434 of file [ratio.c](#).

References [GetModInverses\(\)](#).

Here is the call graph for this function:



4.119.2.20 GCDclean()

```
void GCDclean (
    PHEAD WORD * num,
    WORD * den )
```

Definition at line 2644 of file [ratio.c](#).

4.119.2.21 PolyDiv()

```
WORD * PolyDiv (
    PHEAD WORD * a,
    WORD * b,
    char * text )
```

Definition at line [2741](#) of file [ratio.c](#).

4.119.2.22 DIVfunction()

```
int DIVfunction (
    PHEAD WORD * term,
    WORD level,
    int par )
```

Definition at line [2788](#) of file [ratio.c](#).

4.119.2.23 MULfunc()

```
WORD * MULfunc (
    PHEAD WORD * p1,
    WORD * p2 )
```

Definition at line [2957](#) of file [ratio.c](#).

4.119.2.24 ConvertArgument()

```
WORD * ConvertArgument (
    PHEAD WORD * arg,
    int * type )
```

Definition at line [3018](#) of file [ratio.c](#).

4.119.2.25 ExpandRat()

```
int ExpandRat (
    PHEAD WORD * fun )
```

Definition at line [3113](#) of file [ratio.c](#).

4.119.2.26 InvPoly()

```
int InvPoly (
    PHEAD WORD * inpoly,
    WORD maxpow,
    WORD sym )
```

Definition at line [3592](#) of file [ratio.c](#).

4.119.3 Variable Documentation

4.119.3.1 divrem

WORD divrem[4] = { DIVFUNCTION, REMFUNCTION, INVERSEFUNCTION, MULFUNCTION }

Definition at line 2786 of file [ratio.c](#).

4.119.3.2 TheErrorMessage

char* TheErrorMessage[]

Initial value:

```
= {
    "PolyRatFun not of a type that FORM will expand: incorrect variable inside."
    , "Division by zero in PolyRatFun encountered in ExpandRat."
    , "Irregular code in PolyRatFun encountered in ExpandRat."
    , "Called from ExpandRat."
    , "WorkSpace overflow. Change parameter WorkSpace in setup file?"
}
```

Definition at line 3105 of file [ratio.c](#).

4.120 ratio.c

[Go to the documentation of this file.](#)

```
00001
00008 /* # [ License : */
00009 /*
00010 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 * When using this file you are requested to refer to the publication
00012 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 * This is considered a matter of courtesy as the development was paid
00014 * for by FOM the Dutch physics granting agency and we would like to
00015 * be able to track its scientific use to convince FOM of its value
00016 * for the community.
00017 *
00018 * This file is part of FORM.
00019 *
00020 * FORM is free software: you can redistribute it and/or modify it under the
00021 * terms of the GNU General Public License as published by the Free Software
00022 * Foundation, either version 3 of the License, or (at your option) any later
00023 * version.
00024 *
00025 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 * details.
00029 *
00030 * You should have received a copy of the GNU General Public License along
00031 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* # [ License : */
00034 /*
00035 * # [ Includes : ratio.c
00036 */
00037
00038 #include "form3.h"
00039
00040 /*
00041 * # [ Includes :
00042 * # [ Ratio :
00043
00044 * These are the special operations regarding simple polynomials.
00045 * The first and most needed is the partial fractioning expansion.
00046 * Ratio,x1,x2,x3
00047
00048 * The files belonging to the ratio command serve also as a good example
00049 * of how to implement a new operation.
00050
```

```

00051      # [ RatioFind :
00052
00053      The routine that should locate the need for a ratio command.
00054      If located the corresponding symbols are removed and the
00055      operational parameters are loaded. A subexpression pointer
00056      is inserted and the code for success is returned.
00057
00058      params points at the compiler output block defined in RatioComp.
00059
00060  */
00061
00062  int RatioFind(PHEAD WORD *term, WORD *params)
00063  {
00064      GETBIDENTITY
00065      WORD *t, *m, *r;
00066      WORD x1, x2, i;
00067      WORD *y1, *y2, n1 = 0, n2 = 0;
00068      x1 = params[3];
00069      x2 = params[4];
00070      m = t = term;
00071      m += *m;
00072      m -= ABS(m[-1]);
00073      t++;
00074      if ( t < m ) do {
00075          if ( *t == SYMBOL ) {
00076              y1 = 0;
00077              y2 = 0;
00078              r = t + t[1];
00079              m = t + 2;
00080              do {
00081                  if ( *m == x1 ) { y1 = m; n1 = m[1]; }
00082                  else if ( *m == x2 ) { y2 = m; n2 = m[1]; }
00083                  m += 2;
00084              } while ( m < r );
00085              if ( !y1 || !y2 || ( n1 > 0 && n2 > 0 ) ) return(0);
00086              m -= 2;
00087              if ( y1 > y2 ) { r = y1; y1 = y2; y2 = r; }
00088              *y2 = *m; y2[1] = m[1];
00089              m -= 2;
00090              *y1 = *m; y1[1] = m[1];
00091              i = WORDDIFF(m,t);
00092              #if SUBEXPSIZE > 6
00093              We have to revise the code for the second case.
00094              #endif
00095              if ( i > 2 ) { /* Subexpression fits exactly */
00096                  t[1] = i;
00097                  y1 = term+*term;
00098                  y2 = y1+SUBEXPSIZE-4;
00099                  r = m+4;
00100                  while ( y1 > r ) --y2 = --y1;
00101                  *m++ = SUBEXPRESSION;
00102                  *m++ = SUBEXPSIZE;
00103                  *m++ = -1;
00104                  *m++ = 1;
00105                  *m++ = DUMMYBUFFER;
00106                  FILLSUB(m)
00107                  *term += SUBEXPSIZE-4;
00108              }
00109              else { /* All symbols are gone. Rest has to be moved */
00110                  m -= 2;
00111                  *m++ = SUBEXPRESSION;
00112                  *m++ = SUBEXPSIZE;
00113                  *m++ = -1;
00114                  *m++ = 1;
00115                  *m++ = DUMMYBUFFER;
00116                  FILLSUB(m)
00117                  t = term;
00118                  t += *t;
00119                  *term += SUBEXPSIZE-6;
00120                  r = m + 6-SUBEXPSIZE;
00121                  do { *m++ = *r++; } while ( r < t );
00122              }
00123              t = AT.TMout; /* Load up the TM out array for the generator */
00124              *t++ = 7;
00125              *t++ = RATIO;
00126              *t++ = x1;
00127              *t++ = x2;
00128              *t++ = params[5];
00129              *t++ = n1;
00130              *t++ = n2;
00131              return(1);
00132          }
00133          t += t[1];
00134      } while ( t < m );
00135      return(0);
00136  }
00137

```

```

00138 /*
00139      #] RatioFind :
00140      #[ RatioGen :
00141
00142      The algorithm:
00143      x1^-n1*x2^n2 ==> x2 --> x1 + x3
00144      x1^n1*x2^-n2 ==> x1 --> x2 - x3
00145      x1^-n1*x2^-n2 ==>
00146
00147          +sum(i=0,n1-1){ (-1)^i*binom(n2-1+i,n2-1)
00148              *x3^-(n2+i)*x1^-(n1-i) }
00149          +sum(i=0,n2-1){ (-1)^(n1)*binom(n1-1+i,n1-1)
00150              *x3^-(n1+i)*x2^-(n2-i) }
00151
00152      Actually there is an amount of arbitrariness in the first two
00153      formulae and the replacement x2 -> x1 + x3 could be made 'by hand'.
00154      It is better to use the nontrivial 'minimal change' formula:
00155
00156      x1^-n1*x2^n2:   if ( n1 >= n2 ) {
00157                      +sum(i=0,n2){ x3^i*x1^-(n1-n2+i)*binom(n2,i) }
00158                      }
00159                      else {
00160                          sum(i=0,n2-n1){ x2^(n2-n1-i)*x3^i*binom(n1-1+i,n1-1) }
00161                          +sum(i=0,n1-1){ x3^(n2-i)*x1^-(n1-i)*binom(n2,i) }
00162                      }
00163      x1^n1*x2^-n2:   Same but x3 -> -x3.
00164
00165      The contents of the AT.TMout/params array are:
00166      length,type,x1,x2,x3,n1,n2
00167
00168 */
00169
00170 int RatioGen(PHEAD WORD *term, WORD *params, WORD num, WORD level)
00171 {
00172     GETBIDENTITY
00173     WORD *t, *m;
00174     WORD *tstops[3];
00175     WORD n1, n2, i, j;
00176     WORD x1,x2,x3;
00177     UWORD *coef;
00178     WORD ncoef, sign = 0;
00179     coef = (UWORD *)AT.WorkPointer;
00180     t = term;
00181     tstops[2] = m = t + *t;
00182     m -= ABS(m[-1]);
00183     t++;
00184     do {
00185         if ( *t == SUBEXPRESSION && t[2] == num ) break;
00186         t += t[1];
00187     } while ( t < m );
00188     tstops[0] = t;
00189     tstops[1] = t + t[1];
00190
00191     /* Copying to termout will be from term to tstop1, then the induced part
00192     and finally from tstop2 to tstop3
00193
00194     Now separate the various cases:
00195
00196 */
00197     t = params + 2;
00198     x1 = *t++;
00199     x2 = *t++;
00200     x3 = *t++;
00201     n1 = *t++;
00202     n2 = *t++;
00203     if ( n1 > 0 ) { /* Flip the variables and indicate -x3 */
00204         n2 = -n2;
00205         sign = 1;
00206         i = n1; n1 = n2; n2 = i;
00207         i = x1; x1 = x2; x2 = i;
00208         goto PosNeg;
00209     }
00210     else if ( n2 > 0 ) {
00211         n1 = -n1;
00212     PosNeg:
00213         if ( n2 <= n1 ) { /* x1 -> x2 + x3 */
00214             *coef = 1;
00215             ncoef = 1;
00216             AT.WorkPointer = (WORD *) (coef + 1);
00217             j = n2;
00218             for ( i = 0; i <= n2; i++ ) {
00219                 if ( BinomGen(BHEAD term,level,tstops,x1,x3,n2-n1-i,i,sign&i
00220                     ,coef,ncoef) ) goto RatioCall;
00221                 if ( i < n2 ) {
00222                     if ( Product(coef,&ncoef,j) ) goto RatioCall;
00223                     if ( Quotient(coef,&ncoef,i+1) ) goto RatioCall;
00224                     j--;

```

```

00225         AT.WorkPointer = (WORD *) (coef + ABS(ncoef));
00226     }
00227 }
00228 AT.WorkPointer = (WORD *) (coef);
00229 return(0);
00230 }
00231 else {
00232 /*
00233     sum(i=0,n2-n1){x2^(n2-n1-i)*x3^i*binom(n1-1+i,n1-1)}
00234 +sum(i=0,n1-1){x3^(n2-i)*x1^(n1-i)*binom(n2,i)}
00235 */
00236     *coef = 1;
00237     ncoef = 1;
00238     AT.WorkPointer = (WORD *) (coef + 1);
00239     j = n2 - n1;
00240     for ( i = 0; i <= j; i++ ) {
00241         if ( BinomGen(BHEAD term,level,tstops,x2,x3,n2-n1-i,i,sign&i
00242             ,coef,ncoef) ) goto RatioCall;
00243         if ( i < j ) {
00244             if ( Product(coef,&ncoef,n1+i) ) goto RatioCall;
00245             if ( Quotient(coef,&ncoef,i+1) ) goto RatioCall;
00246             AT.WorkPointer = (WORD *) (coef + ABS(ncoef));
00247         }
00248     }
00249     *coef = 1;
00250     ncoef = 1;
00251     AT.WorkPointer = (WORD *) (coef + 1);
00252     j = n1-1;
00253     for ( i = 0; i <= j; i++ ) {
00254         if ( BinomGen(BHEAD term,level,tstops,x1,x3,i-n1,n2-i,sign&(n2-i)
00255             ,coef,ncoef) ) goto RatioCall;
00256         if ( i < j ) {
00257             if ( Product(coef,&ncoef,n2-i) ) goto RatioCall;
00258             if ( Quotient(coef,&ncoef,i+1) ) goto RatioCall;
00259             AT.WorkPointer = (WORD *) (coef + ABS(ncoef));
00260         }
00261     }
00262     AT.WorkPointer = (WORD *) (coef);
00263     return(0);
00264 }
00265 }
00266 else {
00267     n2 = -n2;
00268     n1 = -n1;
00269 /*
00270     +sum(i=0,n1-1){(-1)^i*binom(n2-1+i,n2-1)
00271     *x3^(n2+i)*x1^(n1-i)}
00272 +sum(i=0,n2-1){(-1)^(n1)*binom(n1-1+i,n1-1)
00273     *x3^(n1+i)*x2^(n2-i)}
00274 */
00275     *coef = 1;
00276     ncoef = 1;
00277     AT.WorkPointer = (WORD *) (coef + 1);
00278     j = n1-1;
00279     for ( i = 0; i <= j; i++ ) {
00280         if ( BinomGen(BHEAD term,level,tstops,x1,x3,i-n1,-n2-i,i&1
00281             ,coef,ncoef) ) goto RatioCall;
00282         if ( i < j ) {
00283             if ( Product(coef,&ncoef,n2+i) ) goto RatioCall;
00284             if ( Quotient(coef,&ncoef,i+1) ) goto RatioCall;
00285             AT.WorkPointer = (WORD *) (coef + ABS(ncoef));
00286         }
00287     }
00288     *coef = 1;
00289     ncoef = 1;
00290     AT.WorkPointer = (WORD *) (coef + 1);
00291     j = n2-1;
00292     for ( i = 0; i <= j; i++ ) {
00293         if ( BinomGen(BHEAD term,level,tstops,x2,x3,i-n2,-n1-i,n1&1
00294             ,coef,ncoef) ) goto RatioCall;
00295         if ( i < j ) {
00296             if ( Product(coef,&ncoef,n1+i) ) goto RatioCall;
00297             if ( Quotient(coef,&ncoef,i+1) ) goto RatioCall;
00298             AT.WorkPointer = (WORD *) (coef + ABS(ncoef));
00299         }
00300     }
00301     AT.WorkPointer = (WORD *) (coef);
00302     return(0);
00303 }
00304 }
00305 RatioCall:
00306     MLOCK(ErrorMessageLock);
00307     MesCall("RatioGen");
00308     MUNLOCK(ErrorMessageLock);
00309     SETERROR(-1)
00310 }
00311

```

```

00312 /*
00313     #] RatioGen :
00314     #[ BinomGen :
00315
00316     Routine for the generation of terms in a binomialtype expansion.
00317
00318 */
00319
00320 int BinomGen(PHEAD WORD *term, WORD level, WORD **tstops, WORD x1, WORD x2,
00321             WORD pow1, WORD pow2, WORD sign, UWORD *coef, WORD ncoef)
00322 {
00323     GETBIDENTITY
00324     WORD *t, *r;
00325     WORD *termout;
00326     WORD k;
00327     termout = AT.WorkPointer;
00328     t = termout;
00329     r = term;
00330     do { *t++ = *r++; } while ( r < tstops[0] );
00331     *t++ = SYMBOL;
00332     if ( pow2 == 0 ) {
00333         if ( pow1 == 0 ) t--;
00334         else { *t++ = 4; *t++ = x1; *t++ = pow1; }
00335     }
00336     else if ( pow1 == 0 ) {
00337         *t++ = 4; *t++ = x2; *t++ = pow2;
00338     }
00339     else {
00340         *t++ = 6; *t++ = x1; *t++ = pow1; *t++ = x2; *t++ = pow2;
00341     }
00342     *t++ = LNUMBER;
00343     *t++ = ABS(ncoef) + 3;
00344     *t = ncoef;
00345     if ( sign ) *t = -*t;
00346     t++;
00347     ncoef = ABS(ncoef);
00348     for ( k = 0; k < ncoef; k++ ) *t++ = coef[k];
00349     r = tstops[1];
00350     do { *t++ = *r++; } while ( r < tstops[2] );
00351     *termout = WORDDIF(t,termout);
00352     AT.WorkPointer = t;
00353     if ( AT.WorkPointer > AT.WorkTop ) {
00354         MLOCK(ErrorMessageLock);
00355         MesWork();
00356         MUNLOCK(ErrorMessageLock);
00357         return(-1);
00358     }
00359     *AN.RepPoint = 1;
00360     AR.expchanged = 1;
00361     if ( Generator(BHEAD termout,level) ) {
00362         MLOCK(ErrorMessageLock);
00363         MesCall("BinomGen");
00364         MUNLOCK(ErrorMessageLock);
00365         SETERROR(-1)
00366     }
00367     AT.WorkPointer = termout;
00368     return(0);
00369 }
00370
00371 /*
00372     #] BinomGen :
00373     #] Ratio :
00374     #[ Sum :
00375     #[ DoSumF1 :
00376
00377     Routine expands a sum_ function.
00378     Its arguments are:
00379     The term in which the function occurs.
00380     The parameter list:
00381         length of parameter field
00382         function number (SUMNUM1)
00383         number of the symbol that is loop parameter
00384         min value
00385         max value
00386         increment
00387     the number of the subexpression to be removed
00388     the level in the generation tree.
00389
00390     Note that the insertion of the loop parameter in the argument
00391     is done via the regular wildcard substitution mechanism.
00392
00393 */
00394
00395 int DoSumF1(PHEAD WORD *term, WORD *params, WORD replac, WORD level)
00396 {
00397     GETBIDENTITY
00398     WORD *termout, *t, extractbuff = AT.TMbuff;

```

```

00399     WORD isum, ival, iinc;
00400     LONG from;
00401     CBUF *C;
00402     ival = params[3];
00403     iinc = params[5];
00404     if ( ( iinc > 0 && params[4] >= ival )
00405         || ( iinc < 0 && params[4] <= ival ) ) {
00406         isum = (params[4] - ival)/iinc + 1;
00407     }
00408     else return(0);
00409     termout = AT.WorkPointer;
00410     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
00411     if ( AT.WorkPointer > AT.WorkTop ) {
00412         MLOCK(ErrorMessageLock);
00413         MesWork();
00414         MUNLOCK(ErrorMessageLock);
00415         return(-1);
00416     }
00417     t = term + 1;
00418     while ( *t != SUBEXPRESSION || t[2] != replac || t[4] != extractbuff )
00419         t += t[1];
00420     C = cbuf+t[4];
00421     t += SUBEXPSIZE;
00422     if ( params[2] < 0 ) {
00423         while ( *t != INDTOIND || t[2] != -params[2] ) t += t[1];
00424         *t = INDTOIND;
00425     }
00426     else {
00427         while ( *t > SYMTOSUB || t[2] != params[2] ) t += t[1];
00428         *t = SYMTONUM;
00429     }
00430     do {
00431         t[3] = ival;
00432         from = C->rhs[replac] - C->Buffer;
00433         while ( C->Buffer[from] ) {
00434             if ( InsertTerm(BHEAD term,replac,extractbuff,C->Buffer+from,termout,0) < 0 ) goto
SumFlCall;
00435             AT.WorkPointer = termout + *termout;
00436             if ( Generator(BHEAD termout,level) < 0 ) goto SumFlCall;
00437             from += C->Buffer[from];
00438         }
00439         ival += iinc;
00440     } while ( --isum > 0 );
00441     AT.WorkPointer = termout;
00442     return(0);
00443 SumFlCall:
00444     MLOCK(ErrorMessageLock);
00445     MesCall("DoSumFl");
00446     MUNLOCK(ErrorMessageLock);
00447     SETERROR(-1)
00448 }
00449
00450 /*
00451     #] DoSumFl :
00452     #[ Glue :
00453
00454     Routine multiplies two terms. The second term is subject
00455     to the wildcard substitutions in sub.
00456     Output in the first term. This routine is a variation on
00457     the routine InsertTerm.
00458
00459 */
00460
00461 int Glue(PHEAD WORD *term1, WORD *term2, WORD *sub, WORD insert)
00462 {
00463     GETBIDENTITY
00464     UWORD *coef;
00465     WORD ncoef, *t, *t1, *t2, i, nc2, nc3, old, newer;
00466     coef = (UWORD *) (TermMalloc("Glue"));
00467     t = term1;
00468     t += *t;
00469     i = t[-1];
00470     t -= ABS(i);
00471     old = WORDDIF(t,term1);
00472     ncoef = REDLENG(i);
00473     if ( i < 0 ) i = -i;
00474     i--;
00475     t1 = t;
00476     t2 = (WORD *)coef;
00477     while ( --i >= 0 ) *t2++ = *t1++;
00478     i = *--t;
00479     nc2 = WildFill(BHEAD t,term2,sub);
00480     *t = i;
00481     t += nc2;
00482     nc2 = t[-1];
00483     t -= ABS(nc2);
00484     newer = WORDDIF(t,term1);

```

```

00485     if ( MulRat (BHEAD (UWORD *)t, REDLENG(nc2), coef, ncoef, (UWORD *)t, &nc3) ) {
00486         MLOCK(ErrorMessageLock);
00487         MesCall("Glue");
00488         MUNLOCK(ErrorMessageLock);
00489         TermFree(coef, "Glue");
00490         SETERROR(-1)
00491     }
00492     i = (ABS(nc3))*2;
00493     t += i++;
00494     *t++ = (nc3 >= 0)?i:-i;
00495     *term1 = WORDDIF(t, term1);
00496 /*
00497     Switch the new piece with the old tail, so that noncommuting
00498     variables get into their proper spot.
00499 */
00500     i = old - insert;
00501     t1 = t;
00502     t2 = term1+insert;
00503     NCOPY(t1, t2, i);
00504     i = newer - old;
00505     t1 = term1+insert;
00506     t2 = term1+old;
00507     NCOPY(t1, t2, i);
00508     t2 = t;
00509     i = old - insert;
00510     NCOPY(t1, t2, i);
00511     TermFree(coef, "Glue");
00512     return(0);
00513 }
00514
00515 /*
00516     #] Glue :
00517     #[ DoSumF2 :
00518 */
00519
00520 int DoSumF2(PHEAD WORD *term, WORD *params, WORD replac, WORD level)
00521 {
00522     GETBIDENTITY
00523     WORD *termout, *t, *from, *sub, *to, extractbuff = AT.TMbuff;
00524     WORD isum, ival, iinc, insert, i;
00525     CBUF *C;
00526     ival = params[3];
00527     iinc = params[5];
00528     if ( ( iinc > 0 && params[4] >= ival )
00529         || ( iinc < 0 && params[4] <= ival ) ) {
00530         isum = (params[4] - ival)/iinc + 1;
00531     }
00532     else return(0);
00533     termout = AT.WorkPointer;
00534     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
00535     if ( AT.WorkPointer > AT.WorkTop ) {
00536         MLOCK(ErrorMessageLock);
00537         MesWork();
00538         MUNLOCK(ErrorMessageLock);
00539         return(-1);
00540     }
00541     t = term + 1;
00542     while ( *t != SUBEXPRESSION || t[2] != replac || t[4] != extractbuff ) t += t[1];
00543     insert = WORDDIF(t, term);
00544
00545     from = term;
00546     to = termout;
00547     while ( from < t ) *to++ = *from++;
00548     from += t[1];
00549     sub = term + *term;
00550     while ( from < sub ) *to++ = *from++;
00551     *termout -= t[1];
00552
00553     sub = t;
00554     C = cbuf+t[4];
00555     t += SUBEXPSIZE;
00556     if ( params[2] < 0 ) {
00557         while ( *t != INDTOIND || t[2] != -params[2] ) t += t[1];
00558         *t = INDTOIND;
00559     }
00560     else {
00561         while ( *t > SYMTOSUB || t[2] != params[2] ) t += t[1];
00562         *t = SYMTONUM;
00563     }
00564     t[3] = ival;
00565     for(;;) {
00566         AT.WorkPointer = termout + *termout;
00567         to = AT.WorkPointer;
00568         if ( ( to + *termout ) > AT.WorkTop ) {
00569             MLOCK(ErrorMessageLock);
00570             MesWork();
00571             MUNLOCK(ErrorMessageLock);

```

```

00572         return(-1);
00573     }
00574     from = termout;
00575     i = *termout;
00576     NCOPY(to, from, i);
00577     from = AT.WorkPointer;
00578     AT.WorkPointer = to;
00579     if ( Generator(BHEAD from, level) < 0 ) goto SumF2Call;
00580     if ( --isum <= 0 ) break;
00581     ival += iinc;
00582     t[3] = ival;
00583     if ( Glue(BHEAD termout, C->rhs[replac], sub, insert) < 0 ) goto SumF2Call;
00584 }
00585 AT.WorkPointer = termout;
00586 return(0);
00587 SumF2Call:
00588 MLOCK(ErrorMessageLock);
00589 MesCall("DoSumF2");
00590 MUNLOCK(ErrorMessageLock);
00591 SETERROR(-1)
00592 }
00593
00594 /*
00595     #] DoSumF2 :
00596     #] Sum :
00597     #[ GCDfunction :
00598     #[ GCDfunction :
00599 */
00600
00601 typedef struct {
00602     WORD *buffer;
00603     DOLLARS dollar;
00604     LONG size;
00605     int type;
00606     int dummy;
00607 } ARGBUFFER;
00608
00609 int GCDfunction(PHEAD WORD *term, WORD level)
00610 {
00611     GETBIDENTITY
00612     WORD *t, *tstop, *tf, *termout, *tin, *tout, *m, *mnext, *mstop, *mm;
00613     int todo, i, ii, j, istart, sign = 1, action = 0;
00614     WORD firstshort = 0, firstvalue = 0, gcdisone = 0, mlength, tlength, newlength;
00615     WORD totargs = 0, numargs, argsdone = 0, *mh, oldvall, *g, *gcdout = 0;
00616     WORD *arg1, *arg2;
00617     UWORD x1, x2, x3;
00618     LONG args;
00619     #if ( FUNHEAD > 4 )
00620     WORD sh[FUNHEAD+5];
00621     #else
00622     WORD sh[9];
00623     #endif
00624     DOLLARS d;
00625     ARGBUFFER *abuf = 0, ab;
00626 /*
00627     #[ Find Function. Count arguments :
00628
00629     First find the proper function
00630 */
00631     t = term + *term; tlength = t[-1];
00632     tstop = t - ABS(tlength);
00633     t = term + 1;
00634     while ( t < tstop ) {
00635         if ( *t != GCDFUNCTION ) { t += t[1]; continue; }
00636         todo = 1; totargs = 0;
00637         tf = t + FUNHEAD;
00638         while ( tf < t + t[1] ) {
00639             totargs++;
00640             if ( *tf > 0 && tf[1] != 0 ) todo = 0;
00641             NEXTARG(tf);
00642         }
00643         if ( todo ) break;
00644         t += t[1];
00645     }
00646     if ( t >= tstop ) {
00647         MLOCK(ErrorMessageLock);
00648         MesPrint("Internal error. Indicated gcd_ function not encountered.");
00649         MUNLOCK(ErrorMessageLock);
00650         Terminate(-1);
00651     }
00652     WantAddPointers(totargs);
00653     args = AT.pWorkPointer; AT.pWorkPointer += totargs;
00654 /*
00655     #] Find Function. Count arguments :
00656     #[ Do short arguments :
00657
00658     The function we need, in agreement with TestSub, is now in t

```



```

00659     Make first a compilation of the short arguments (except $-s and expressions)
00660     to see whether we need to do much work.
00661     This means that after this scan we can ignore all short arguments with
00662     the exception of unevaluated $-s and expressions.
00663  */
00664     numargs = 0;
00665     firstshort = 0;
00666     tf = t + FUNHEAD;
00667     while ( tf < t + t[1] ) {
00668         if ( *tf == -SNUMBER && tf[1] == 0 ) { NEXTARG(tf); continue; }
00669         if ( *tf > 0 || *tf == -DOLLAREXPRESSION || *tf == -EXPRESSION ) {
00670             AT.pWorkspace[args+numargs++] = tf;
00671             NEXTARG(tf); continue;
00672         }
00673         if ( firstshort == 0 ) {
00674             firstshort = *tf;
00675             if ( *tf <= -FUNCTION ) { firstvalue = -( *tf ); }
00676             else { firstvalue = tf[1]; }
00677             NEXTARG(tf);
00678             argsdone++;
00679             continue;
00680         }
00681         else if ( *tf != firstshort ) {
00682             if ( *tf != -INDEX && *tf != -VECTOR && *tf != -MINVECTOR ) {
00683                 argsdone++; gcdisone = 1; break;
00684             }
00685             if ( firstshort != -INDEX && firstshort != -VECTOR && firstshort != -MINVECTOR ) {
00686                 argsdone++; gcdisone = 1; break;
00687             }
00688             if ( tf[1] != firstvalue ) {
00689                 argsdone++; gcdisone = 1; break;
00690             }
00691             if ( *t == -MINVECTOR ) { firstshort = -VECTOR; }
00692             if ( firstshort == -MINVECTOR ) { firstshort = -VECTOR; }
00693         }
00694         else if ( *tf > -FUNCTION && *tf != -SNUMBER && tf[1] != firstvalue ) {
00695             argsdone++; gcdisone = 1; break;
00696         }
00697         if ( *tf == -SNUMBER && firstvalue != tf[1] ) {
00698             /*
00699                 make a new firstvalue which is gcd_(firstvalue,tf[1])
00700             */
00701             if ( firstvalue == 1 || tf[1] == 1 ) { gcdisone = 1; break; }
00702             if ( firstvalue < 0 && tf[1] < 0 ) {
00703                 x1 = -firstvalue; x2 = -tf[1]; sign = -1;
00704             }
00705             else {
00706                 x1 = ABS(firstvalue); x2 = ABS(tf[1]); sign = 1;
00707             }
00708             while ( ( x3 = x1%x2 ) != 0 ) { x1 = x2; x2 = x3; }
00709             firstvalue = ((WORD)x2)*sign;
00710             argsdone++;
00711             if ( firstvalue == 1 ) { gcdisone = 1; break; }
00712         }
00713         NEXTARG(tf);
00714     }
00715     termout = AT.WorkPointer;
00716     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
00717     if ( AT.WorkPointer > AT.WorkTop ) {
00718         MLOCK(ErrorMessageLock);
00719         MesWork();
00720         MUNLOCK(ErrorMessageLock);
00721         return(-1);
00722     }
00723  */
00724     #] Do short arguments :
00725     #[ Do trivial GCD :
00726
00727     Copy head
00728  */
00729     i = t - term; tin = term; tout = termout;
00730     NCOPY(tout,tin,i);
00731     if ( gcdisone || ( firstshort == -SNUMBER && firstvalue == 1 ) ) {
00732         sign = 1;
00733     gcdone:
00734         tin += t[1]; tstop = term + *term;
00735         while ( tin < tstop ) *tout++ = *tin++;
00736         *termout = tout - termout;
00737         if ( sign < 0 ) tout[-1] = -tout[-1];
00738         AT.WorkPointer = tout;
00739         if ( argsdone && Generator(BHEAD termout,level) < 0 ) goto CalledFrom;
00740         AT.WorkPointer = termout;
00741         AT.pWorkPointer = args;
00742         return(0);
00743     }
00744  */
00745     #] Do trivial GCD :

```

```

00746     #[ Do short argument GCD :
00747     */
00748     if ( numargs == 0 ) {      /* basically we are done */
00749 doshort:
00750         sign = 1;
00751         if ( firstshort == 0 ) goto gcdone;
00752         if ( firstshort == -SNUMBER ) {
00753             *tout++ = SNUMBER; *tout++ = 4; *tout++ = firstvalue; *tout++ = 1;
00754             goto gcdone;
00755         }
00756         else if ( firstshort == -SYMBOL ) {
00757             *tout++ = SYMBOL; *tout++ = 4; *tout++ = firstvalue; *tout++ = 1;
00758             goto gcdone;
00759         }
00760         else if ( firstshort == -VECTOR || firstshort == -INDEX ) {
00761             *tout++ = INDEX; *tout++ = 3; *tout++ = firstvalue; goto gcdone;
00762         }
00763         else if ( firstshort == -MINVECTOR ) {
00764             sign = -1;
00765             *tout++ = INDEX; *tout++ = 3; *tout++ = firstvalue; goto gcdone;
00766         }
00767         else if ( firstshort <= -FUNCTION ) {
00768             *tout++ = firstvalue; *tout++ = FUNHEAD; FILLFUN(tout);
00769             goto gcdone;
00770         }
00771         else {
00772             MLOCK(ErrorMessageLock);
00773             MesPrint("Internal error. Illegal short argument in GCDfunction.");
00774             MUNLOCK(ErrorMessageLock);
00775             Terminate(-1);
00776         }
00777     }
00778     /*
00779     #[ Do short argument GCD :
00780     #[ Convert short argument :
00781
00782     Now we allocate space for the arguments in general notation.
00783     First the special one if there were short arguments
00784     */
00785     if ( firstshort ) {
00786         switch ( firstshort ) {
00787             case -SNUMBER:
00788                 sh[0] = 4; sh[1] = ABS(firstvalue); sh[2] = 1;
00789                 if ( firstvalue < 0 ) sh[3] = -3;
00790                 else sh[3] = 3;
00791                 sh[4] = 0;
00792                 break;
00793             case -MINVECTOR:
00794             case -VECTOR:
00795             case -INDEX:
00796                 sh[0] = 8; sh[1] = INDEX; sh[2] = 3; sh[3] = firstvalue;
00797                 sh[4] = 1; sh[5] = 1;
00798                 if ( firstshort == -MINVECTOR ) sh[6] = -3;
00799                 else sh[6] = 3;
00800                 sh[7] = 0;
00801                 break;
00802             case -SYMBOL:
00803                 sh[0] = 8; sh[1] = SYMBOL; sh[2] = 4; sh[3] = firstvalue; sh[4] = 1;
00804                 sh[5] = 1; sh[6] = 1; sh[7] = 3; sh[8] = 0;
00805                 break;
00806             default:
00807                 sh[0] = FUNHEAD+4; sh[1] = firstshort; sh[2] = FUNHEAD;
00808                 for ( i = 2; i < FUNHEAD; i++ ) sh[i+1] = 0;
00809                 sh[FUNHEAD+1] = 1; sh[FUNHEAD+2] = 1; sh[FUNHEAD+3] = 3; sh[FUNHEAD+4] = 0;
00810                 break;
00811         }
00812     }
00813     /*
00814     #[ Convert short argument :
00815     #[ Sort arguments :
00816
00817     Now we should sort the arguments in a way that the dollars and the
00818     expressions come last. That way we may never need them.
00819     */
00820     for ( i = 1; i < numargs; i++ ) {
00821         for ( ii = i; ii > 0; ii-- ) {
00822             arg1 = AT.pWorkSpace[args+ii];
00823             arg2 = AT.pWorkSpace[args+ii-1];
00824             if ( *arg1 < 0 ) {
00825                 if ( *arg2 < 0 ) {
00826                     if ( *arg1 == -EXPRESSION ) break;
00827                     if ( *arg2 == -DOLLAREXPRESSION ) break;
00828                     AT.pWorkSpace[args+ii] = arg2;
00829                     AT.pWorkSpace[args+ii-1] = arg1;
00830                 }
00831                 else break;
00832             }

```

```

00833         else if ( *arg2 < 0 ) {
00834             AT.pWorkSpace[args+ii] = arg2;
00835             AT.pWorkSpace[args+ii-1] = arg1;
00836         }
00837         else {
00838             if ( *arg1 > *arg2 ) {
00839                 AT.pWorkSpace[args+ii] = arg2;
00840                 AT.pWorkSpace[args+ii-1] = arg1;
00841             }
00842             else break;
00843         }
00844     }
00845 }
00846 /*
00847 #] Sort arguments :
00848 #[ There is a single term argument :
00849 */
00850 if ( firstshort ) {
00851     mh = sh;  istart = 0;
00852 oneterm:;
00853     for ( i = istart; i < numargs; i++ ) {
00854         arg1 = AT.pWorkSpace[args+i];
00855         if ( *arg1 > 0 ) {
00856             oldvall = arg1[*arg1]; arg1[*arg1] = 0;
00857             m = arg1+ARGHEAD;
00858             while ( *m ) {
00859                 GCDterms(BHEAD mh,m,mh); m += *m;
00860                 if ( mh[0] == 4 && mh[1] == 1 && mh[2] == 1 && mh[3] == 3 ) {
00861                     gcdisone = 1; sign = 1; arg1[*arg1] = oldvall; goto gcdone;
00862                 }
00863             }
00864             arg1[*arg1] = oldvall;
00865         }
00866         else if ( *arg1 == -DOLLAREXPRESSION ) {
00867             if ( ( d = DolToTerms(BHEAD arg1[1]) ) != 0 ) {
00868                 m = d->where;
00869                 while ( *m ) {
00870                     GCDterms(BHEAD mh,m,mh); m += *m;
00871                     argsdone++;
00872                     if ( mh[0] == 4 && mh[1] == 1 && mh[2] == 1 && mh[3] == 3 ) {
00873                         gcdisone = 1; sign = 1;
00874                         if ( d->factors ) M_free(d->factors,"Dollar factors");
00875                         M_free(d,"Copy of dollar variable"); goto gcdone;
00876                     }
00877                 }
00878                 if ( d->factors ) M_free(d->factors,"Dollar factors");
00879                 M_free(d,"Copy of dollar variable");
00880             }
00881         }
00882         else {
00883             mm = CreateExpression(BHEAD arg1[1]);
00884             m = mm;
00885             while ( *m ) {
00886                 GCDterms(BHEAD mh,m,mh); m += *m;
00887                 argsdone++;
00888                 if ( mh[0] == 4 && mh[1] == 1 && mh[2] == 1 && mh[3] == 3 ) {
00889                     gcdisone = 1; sign = 1; M_free(mm,"CreateExpression"); goto gcdone;
00890                 }
00891             }
00892             M_free(mm,"CreateExpression");
00893         }
00894     }
00895     if ( firstshort ) {
00896         if ( mh[0] == 4 ) {
00897             firstshort = -SNUMBER; firstvalue = mh[1] * (mh[3]/3);
00898         }
00899         else if ( mh[1] == SYMBOL ) {
00900             firstshort = -SYMBOL; firstvalue = mh[3];
00901         }
00902         else if ( mh[1] == INDEX ) {
00903             firstshort = -INDEX; firstvalue = mh[3];
00904             if ( mh[6] == -3 ) firstshort = -MINVECTOR;
00905         }
00906         else if ( mh[1] >= FUNCTION ) {
00907             firstshort = -mh[1]; firstvalue = mh[1];
00908         }
00909         goto doshort;
00910     }
00911     else {
00912         /*
00913         We have a GCD that is only a single term.
00914         Paste it in and combine the coefficients.
00915         */
00916         mh[mh[0]] = 0;
00917         mm = mh;
00918         ii = 0;
00919         goto multiterms;

```

```

00920     }
00921 }
00922 /*
00923 Now we have only regular arguments.
00924 But some have not yet been expanded.
00925 Check whether there are proper long arguments and if so if there is
00926 one with just a single term
00927 */
00928 for ( i = 0; i < numargs; i++ ) {
00929     arg1 = AT.pWorkSpace[args+i];
00930     if ( *arg1 > 0 && arg1[ARGHEAD]+ARGHEAD == *arg1 ) {
00931 /*
00932         We have an argument with a single term
00933 */
00934         if ( i != 0 ) {
00935             arg2 = AT.pWorkSpace[args];
00936             AT.pWorkSpace[args] = arg1;
00937             AT.pWorkSpace[args+1] = arg2;
00938         }
00939         m = mh = AT.WorkPointer;
00940         mm = arg1+ARGHEAD; i = *mm;
00941         NCOPY(m,mm,i);
00942         AT.WorkPointer = m;
00943         istart = 1;
00944         argsdone++;
00945         goto oneterm;
00946     }
00947 }
00948 /*
00949 #] There is a single term argument :
00950 #[ Expand $ and expr :
00951
00952 We have: 1: regular multiterm arguments
00953          2: dollars
00954          3: expressions.
00955 The sum of them is numargs. Their addresses are in args. The problem is
00956 that expansion will lead to allocations that we have to return and all
00957 these allocations are different in nature.
00958 */
00959 action = 1;
00960 abuf = (ARGBUFFER *)Malloc1(numargs*sizeof(ARGBUFFER),"argbuffer");
00961 for ( i = 0; i < numargs; i++ ) {
00962     arg1 = AT.pWorkSpace[args+i];
00963     if ( *arg1 > 0 ) {
00964         m = (WORD *)Malloc1(*arg1*sizeof(WORD),"argbuffer type 0");
00965         abuf[i].buffer = m;
00966         abuf[i].type = 0;
00967         mm = arg1+ARGHEAD;
00968         j = *arg1-ARGHEAD;
00969         abuf[i].size = j;
00970         if ( j ) argsdone++;
00971         NCOPY(m,mm,j);
00972         *m = 0;
00973     }
00974     else if ( *arg1 == -DOLLAREXPRESSION ) {
00975         d = DolToTerms(BHEAD arg1[1]);
00976         abuf[i].buffer = d->where;
00977         abuf[i].type = 1;
00978         abuf[i].dollar = d;
00979         m = abuf[i].buffer;
00980         if ( *m ) argsdone++;
00981         while ( *m ) m+= *m;
00982         abuf[i].size = m-abuf[i].buffer;
00983     }
00984     else if ( *arg1 == -EXPRESSION ) {
00985         abuf[i].buffer = CreateExpression(BHEAD arg1[1]);
00986         abuf[i].type = 2;
00987         m = abuf[i].buffer;
00988         if ( *m ) argsdone++;
00989         while ( *m ) m+= *m;
00990         abuf[i].size = m-abuf[i].buffer;
00991     }
00992     else {
00993         MLOCK(ErrorMessageLock);
00994         MesPrint("What argument is this?");
00995         MUNLOCK(ErrorMessageLock);
00996         goto CalledFrom;
00997     }
00998 }
00999 for ( i = 0; i < numargs; i++ ) {
01000     arg1 = abuf[i].buffer;
01001     if ( *arg1 == 0 ) {}
01002     else if ( arg1[*arg1] == 0 ) {
01003 /*
01004         After expansion there is an argument with a single term
01005 */
01006         ab = abuf[i]; abuf[i] = abuf[0]; abuf[0] = ab;

```

```

01007         mh = abuf[0].buffer;
01008         for ( j = 1; j < numargs; j++ ) {
01009             m = abuf[j].buffer;
01010             while ( *m ) {
01011                 GCDterms(BHEAD mh,m,mh); m += *m;
01012                 argsdone++;
01013                 if ( mh[0] == 4 && mh[1] == 1 && mh[2] == 1 && mh[3] == 3 ) {
01014                     gcdisone = 1; sign = 1; break;
01015                 }
01016             }
01017             if ( *m ) break;
01018         }
01019         mm = mh + *mh; if ( mm[-1] < 0 ) { sign = -1; mm[-1] = -mm[-1]; }
01020         mstop = mm - mm[-1]; m = mh+1; mlength = mm[-1];
01021         while ( tin < t ) *tout++ = *tin++;
01022         while ( m < mstop ) *tout++ = *m++;
01023         tin += tin[1];
01024         while ( tin < tstop ) *tout++ = *tin++;
01025         tlength = REDLENG(tlength);
01026         mlength = REDLENG(mlength);
01027         if ( MulRat(BHEAD (UWORD *)tstop,tlength,(UWORD *)mstop,mlength,
01028             (UWORD *)tout,&newlength) < 0 ) goto CalledFrom;
01029         mlength = INCLENG(newlength);
01030         tout += ABS(mlength);
01031         tout[-1] = mlength*sign;
01032         *termout = tout - termout;
01033         AT.WorkPointer = tout;
01034         if ( argsdone && Generator(BHEAD termout,level) < 0 ) goto CalledFrom;
01035         goto cleanup;
01036     }
01037 }
01038 /*
01039  There are only arguments with more than one term.
01040  We order them by size to make the computations as easy as possible.
01041 */
01042 for ( i = 1; i < numargs; i++ ) {
01043     for ( ii = i; ii > 0; ii-- ) {
01044         if ( abuf[ii-1].size <= abuf[ii].size ) break;
01045         ab = abuf[ii-1]; abuf[ii-1] = abuf[ii]; abuf[ii] = ab;
01046     }
01047 }
01048 /*
01049  #] Expand $ and expr :
01050  #[ Multiterm subexpressions :
01051 */
01052 ii = 0;
01053 gcdout = abuf[ii].buffer;
01054 for ( i = 0; i < numargs; i++ ) {
01055     if ( abuf[i].buffer[0] ) { gcdout = abuf[i].buffer; ii = i; i++; argsdone++; break; }
01056 }
01057 for ( ; i < numargs; i++ ) {
01058     if ( abuf[i].buffer[0] ) {
01059         g = GCDfunction3(BHEAD gcdout,abuf[i].buffer);
01060         argsdone++;
01061         if ( gcdout != abuf[ii].buffer ) M_free(gcdout,"gcdout");
01062         gcdout = g;
01063         if ( gcdout[*gcdout] == 0 && gcdout[0] == 4 && gcdout[1] == 1
01064             && gcdout[2] == 1 && gcdout[3] == 3 ) break;
01065     }
01066 }
01067 mm = gcdout;
01068 multiterms:;
01069 tlength = REDLENG(tlength);
01070 while ( *mm ) {
01071     tin = term; tout = termout; while ( tin < t ) *tout++ = *tin++;
01072     tin += t[1];
01073     mnext = mm + *mm; mlength = mnext[-1]; mstop = mnext - ABS(mlength);
01074     mm++;
01075     while ( mm < mstop ) *tout++ = *mm++;
01076     while ( tin < tstop ) *tout++ = *tin++;
01077     mlength = REDLENG(mlength);
01078     if ( MulRat(BHEAD (UWORD *)tstop,tlength,(UWORD *)mm,mlength,
01079         (UWORD *)tout,&newlength) < 0 ) goto CalledFrom;
01080     mlength = INCLENG(newlength);
01081     tout += ABS(mlength);
01082     tout[-1] = mlength;
01083     *termout = tout - termout;
01084     AT.WorkPointer = tout;
01085     if ( argsdone && Generator(BHEAD termout,level) < 0 ) goto CalledFrom;
01086     mm = mnext; /* next term */
01087 }
01088 if ( action && ( gcdout != abuf[ii].buffer ) ) M_free(gcdout,"gcdout");
01089 /*
01090  #] Multiterm subexpressions :
01091  #[ Cleanup :
01092 */
01093 cleanup:;

```

```

01094     if ( action ) {
01095         for ( i = 0; i < numargs; i++ ) {
01096             if ( abuf[i].type == 0 ) { M_free(abuf[i].buffer,"argbuffer type 0"); }
01097             else if ( abuf[i].type == 1 ) {
01098                 d = abuf[i].dollar;
01099                 if ( d->factors ) M_free(d->factors,"Dollar factors");
01100                 M_free(d,"Copy of dollar variable");
01101             }
01102             else if ( abuf[i].type == 2 ) { M_free(abuf[i].buffer,"CreateExpression"); }
01103         }
01104         M_free(abuf,"argbuffer");
01105     }
01106 /*
01107     #] Cleanup :
01108 */
01109     AT.pWorkPointer = args;
01110     AT.WorkPointer = termout;
01111     return(0);
01112
01113 CalledFrom:
01114     MLOCK(ErrorMessageLock);
01115     MesCall("GCDfunction");
01116     MUNLOCK(ErrorMessageLock);
01117     SETERROR(-1)
01118     return(-1);
01119 }
01120
01121 /*
01122     #] GCDfunction :
01123     #[ GCDfunction3 :
01124
01125     Finds the GCD of the two arguments which are buffers with terms.
01126     In principle the first buffer can have only one term.
01127
01128     If both buffers have more than one term, we need to replace all
01129     non-symbolic objects by generated symbols and substitute that back
01130     afterwards. The rest we leave to the powerful routines.
01131     Philosophical problem: What do we do with GCD_(x/z+y,x+y*z) ?
01132
01133     Method:
01134     If we have only negative powers of z and no positive powers we let
01135     the EXTRASYMBOLS do their job. When mixed, multiply the arguments with
01136     the negative powers with enough powers of z to eliminate the negative powers.
01137     The DENOMINATOR function is always eliminated with the mechanism as we
01138     cannot tell whether there are positive powers of its contents.
01139 */
01140 WORD *GCDfunction3(PHEAD WORD *in1, WORD *in2)
01141 {
01142     GETBIDENTITY
01143     WORD oldsorttype = AR.SortType, *ow = AT.WorkPointer;;
01144     WORD *t, *tt, *gcdout, *term1, *term2, *confree1, *confree2, *gcdout1, *proper1, *proper2;
01145     int i, actionflag1, actionflag2;
01146     WORD startebuf = cbuf[AT.ebufnum].numrhs;
01147     WORD tryterm1, tryterm2;
01148     if ( in2[*in2] == 0 ) { t = in1; in1 = in2; in2 = t; }
01149     if ( in1[*in1] == 0 ) { /* First input with only one term */
01150         gcdout = (WORD *)Malloc1((*in1+1)*sizeof(WORD),"gcdout");
01151         i = *in1; t = gcdout; tt = in1; NCOPY(t,tt,i); *t = 0;
01152         t = in2;
01153         while ( *t ) {
01154             GCDterms(BHEAD gcdout,t,gcdout);
01155             if ( gcdout[0] == 4 && gcdout[1] == 1
01156                 && gcdout[2] == 1 && gcdout[3] == 3 ) break;
01157             t += *t;
01158         }
01159         AT.WorkPointer = ow;
01160         return(gcdout);
01161     }
01162 }
01163 /*
01164     We need to take out the content from the two expressions
01165     and determine their GCD. This plays with the negative powers!
01166 */
01167     AR.SortType = SORTHIGHFIRST;
01168     term1 = TermMalloc("GCDfunction3-a");
01169     term2 = TermMalloc("GCDfunction3-b");
01170
01171     confree1 = TakeContent(BHEAD in1,term1);
01172     tryterm1 = AN.tryterm; AN.tryterm = 0;
01173     confree2 = TakeContent(BHEAD in2,term2);
01174     tryterm2 = AN.tryterm; AN.tryterm = 0;
01175 /*
01176     confree1 = TakeSymbolContent(BHEAD in1,term1);
01177     confree2 = TakeSymbolContent(BHEAD in2,term2);
01178 */
01179     GCDterms(BHEAD term1,term2,term1);
01180     TermFree(term2,"GCDfunction3-b");

```

```

01181 /*
01182     Now we have to replace all non-symbols and symbols to a negative power
01183     by extra symbols.
01184 */
01185 if ( ( proper1 = PutExtraSymbols(BHEAD confree1,startebuf,&actionflag1) ) == 0 ) goto CalledFrom;
01186 if ( confree1 != in1 ) {
01187     if ( tryterm1 ) { TermFree(confree1,"TakeContent"); }
01188     else { M_free(confree1,"TakeContent"); }
01189 }
01190 /*
01191     TermFree(confree1,"TakeSymbolContent");
01192 */
01193 if ( ( proper2 = PutExtraSymbols(BHEAD confree2,startebuf,&actionflag2) ) == 0 ) goto CalledFrom;
01194 if ( confree2 != in2 ) {
01195     if ( tryterm2 ) { TermFree(confree2,"TakeContent"); }
01196     else { M_free(confree2,"TakeContent"); }
01197 }
01198 /*
01199     TermFree(confree2,"TakeSymbolContent");
01200 */
01201 /*
01202     And now the real work:
01203 */
01204 gcdout1 = poly_gcd(BHEAD proper1,proper2,0);
01205 M_free(proper1,"PutExtraSymbols");
01206 M_free(proper2,"PutExtraSymbols");
01207
01208 AR.SortType = oldsorttype;
01209 if ( actionflag1 || actionflag2 ) {
01210     if ( ( gcdout = TakeExtraSymbols(BHEAD gcdout1,startebuf) ) == 0 ) goto CalledFrom;
01211     M_free(gcdout1,"gcdout");
01212 }
01213 else {
01214     gcdout = gcdout1;
01215 }
01216
01217 cbuf[AT.ebufnum].numrhs = startebuf;
01218 /*
01219     Now multiply gcdout by term1
01220 */
01221 if ( term1[0] != 4 || term1[3] != 3 || term1[1] != 1 || term1[2] != 1 ) {
01222     AN.tryterm = -1;
01223     if ( ( gcdout1 = MultiplyWithTerm(BHEAD gcdout,term1,2) ) == 0 ) goto CalledFrom;
01224     AN.tryterm = 0;
01225     M_free(gcdout,"gcdout");
01226     gcdout = gcdout1;
01227 }
01228 TermFree(term1,"GCDfunction3-a");
01229 AT.WorkPointer = ow;
01230 return(gcdout);
01231 CalledFrom:
01232 AN.tryterm = 0;
01233 MLOCK(ErrorMessageLock);
01234 MesCall("GCDfunction3");
01235 MUNLOCK(ErrorMessageLock);
01236 return(0);
01237 }
01238
01239 /*
01240     #] GCDfunction3 :
01241     #[ PutExtraSymbols :
01242 */
01243
01244 WORD *PutExtraSymbols(PHEAD WORD *in,WORD startebuf,int *actionflag)
01245 {
01246     WORD *termout = AT.WorkPointer;
01247     int action;
01248     *actionflag = 0;
01249     NewSort(BHEAD0);
01250     while ( *in ) {
01251         if ( ( action = LocalConvertToPoly(BHEAD in,termout,startebuf,0) ) < 0 ) {
01252             LowerSortLevel();
01253             goto CalledFrom;
01254         }
01255         if ( action > 0 ) *actionflag = 1;
01256         StoreTerm(BHEAD termout);
01257         in += *in;
01258     }
01259     if ( EndSort(BHEAD (WORD *)((void *)&termout)),2) < 0 ) goto CalledFrom;
01260     return(termout);
01261 CalledFrom:
01262     MLOCK(ErrorMessageLock);
01263     MesCall("PutExtraSymbols");
01264     MUNLOCK(ErrorMessageLock);
01265     return(0);
01266 }
01267

```

```

01268 /*
01269      #] PutExtraSymbols :
01270      #[ TakeExtraSymbols :
01271 */
01272
01273 WORD *TakeExtraSymbols(PHEAD WORD *in,WORD startebuf)
01274 {
01275     CBUF *C = cbuf+AC.cbunum;
01276     CBUF *CC = cbuf+AT.ebunum;
01277     WORD *oldworkpointer = AT.WorkPointer, *termout;
01278
01279     termout = AT.WorkPointer;
01280     NewSort(BHEAD0);
01281     while ( *in ) {
01282         if ( ConvertFromPoly(BHEAD
in,termout,numxsymbol,CC->numrhs-startebuf+numxsymbol,startebuf-numxsymbol,1) <= 0 ) {
01283             LowerSortLevel();
01284             goto CalledFrom;
01285         }
01286         in += *in;
01287         AT.WorkPointer = termout + *termout;
01288     /*
01289         ConvertFromPoly leaves terms with subexpressions. Hence:
01290     */
01291         if ( Generator(BHEAD termout,C->numlhs) ) {
01292             LowerSortLevel();
01293             goto CalledFrom;
01294         }
01295     }
01296     AT.WorkPointer = oldworkpointer;
01297     if ( EndSort(BHEAD (WORD *)((void *)(&termout)),2) < 0 ) goto CalledFrom;
01298     return(termout);
01299
01300 CalledFrom:
01301     MLOCK(ErrorMessageLock);
01302     MesCall("TakeExtraSymbols");
01303     MUNLOCK(ErrorMessageLock);
01304     return(0);
01305 }
01306
01307 /*
01308      #] TakeExtraSymbols :
01309      #[ MultiplyWithTerm :
01310 */
01311
01312 WORD *MultiplyWithTerm(PHEAD WORD *in, WORD *term, WORD par)
01313 {
01314     WORD *termout, *t, *tt, *tstop, *ttstop;
01315     WORD length, length1, length2;
01316     WORD oldsorttype = AR.SortType;
01317     COMPARE oldcompareroutine = (COMPARE) (AR.CompareRoutine);
01318     AR.CompareRoutine = (COMPAREDUMMY) (&CompareSymbols);
01319
01320     if ( par == 0 || par == 2 ) AR.SortType = SORTHIGHFIRST;
01321     else AR.SortType = SORTLOWFIRST;
01322     termout = AT.WorkPointer;
01323     NewSort(BHEAD0);
01324     while ( *in ) {
01325         tt = termout + 1;
01326         tstop = in + *in; tstop -= ABS(tstop[-1]); t = in + 1;
01327         while ( t < tstop ) *t++ = *t++;
01328         ttstop = term + *term; ttstop -= ABS(ttstop[-1]); t = term + 1;
01329         while ( t < ttstop ) *t++ = *t++;
01330         length1 = REDLENG(in[*in-1]); length2 = REDLENG(term[*term-1]);
01331         if ( MulRat(BHEAD (UWORD *)tstop,length1,
01332             (UWORD *)ttstop,length2,(UWORD *)tt,&length) ) goto CalledFrom;
01333         length = INCLENG(length);
01334         tt += ABS(length); tt[-1] = length;
01335         *termout = tt - termout;
01336         SymbolNormalize(termout);
01337         StoreTerm(BHEAD termout);
01338         in += *in;
01339     }
01340     if ( par == 2 ) {
01341     /*
01342         if ( AN.tryterm == 0 ) AN.tryterm = 1; */
01343         AN.tryterm = 0; /* For now */
01344         if ( EndSort(BHEAD (WORD *)((void *)(&termout)),2) < 0 ) goto CalledFrom;
01345     }
01346     else {
01347         if ( EndSort(BHEAD termout,1) < 0 ) goto CalledFrom;
01348     }
01349     AR.CompareRoutine = (COMPAREDUMMY)oldcompareroutine;
01350
01351     AR.SortType = oldsorttype;
01352     return(termout);
01353 }

```



```

01354 CalledFrom:
01355     MLOCK(ErrorMessageLock);
01356     MesCall("MultiplyWithTerm");
01357     MUNLOCK(ErrorMessageLock);
01358     return(0);
01359 }
01360
01361 /*
01362     #] MultiplyWithTerm :
01363     #[ TakeContent :
01364 */
01376 WORD *TakeContent(PHEAD WORD *in, WORD *term)
01377 {
01378     GETBIDENTITY
01379     WORD *t, *tstop, *tcom, *tout, *tstore, *r, *rstop, *m, *mm, *w, *ww, *wterm;
01380     WORD *tnext, *tt, *tterm, code[2];
01381     WORD *inp, a, *den;
01382     int i, j, k, action = 0, sign;
01383     UWORD *GCDbuffer, *GCDbuffer2, *LCMbuffer, *LCMbuffer2, *ap;
01384     WORD GCDlen, GCDlen2, LCMlen, LCMlen2, length, redlength, len1, len2;
01385     tout = tstore = term+1;
01386 /*
01387     #[ INDEX :
01388 */
01389     t = in;
01390     tnext = t + *t;
01391     tstop = tnext-ABS(tnext[-1]);
01392     t++;
01393     while ( t < tstop ) {
01394         if ( *t == INDEX ) {
01395             i = t[1]; NCOPY(tout,t,i); break;
01396         }
01397         else t += t[1];
01398     }
01399     if ( tout > tstore ) { /* There are indices in the first term */
01400         t = tnext;
01401         while ( *t ) {
01402             tnext = t + *t;
01403             rstop = tnext - ABS(tnext[-1]);
01404             r = t+1;
01405             if ( r == rstop ) goto noindices;
01406             while ( r < rstop ) {
01407                 if ( *r != INDEX ) { r += r[1]; continue; }
01408                 m = tstore+2;
01409                 while ( m < tout ) {
01410                     for ( i = 2; i < r[1]; i++ ) {
01411                         if ( *m == r[i] ) break;
01412                         if ( *m > r[i] ) continue;
01413                         mm = m+1;
01414                         while ( mm < tout ) { mm[-1] = mm[0]; mm++; }
01415                         tout--; tstore[1]--; m--;
01416                         break;
01417                     }
01418                     m++;
01419                 }
01420             }
01421             if ( r >= rstop || tout <= tstore+2 ) {
01422                 tout = tstore; break;
01423             }
01424         }
01425         if ( tout > tstore+2 ) { /* Now we have to take out what is in tstore */
01426             t = in; w = in;
01427             while ( *t ) {
01428                 wterm = w;
01429                 tnext = t + *t; t++; w++;
01430                 while ( *t != INDEX ) { i = t[1]; NCOPY(w,t,i); }
01431                 tt = t + t[1]; t += 2; r = tstore+2; ww = w; *w++ = INDEX; w++;
01432                 while ( r < tout && t < tt ) {
01433                     if ( *r > *t ) { *w++ = *t++; }
01434                     else if ( *r == *t ) { r++; t++; }
01435                     else goto CalledFrom;
01436                 }
01437                 if ( r < tout ) goto CalledFrom;
01438                 while ( t < tt ) *w++ = *t++;
01439                 ww[1] = w - ww;
01440                 if ( ww[1] == 2 ) w = ww;
01441                 while ( t < tnext ) *w++ = *t++;
01442                 *wterm = w - wterm;
01443             }
01444             *w = 0;
01445         }
01446     noindices:
01447         tstore = tout;
01448     }
01449 /*
01450     #] INDEX :
01451     #[ VECTOR/DELTA :

```

```

01452 */
01453 code[0] = VECTOR; code[1] = DELTA;
01454 for ( k = 0; k < 2; k++ ) {
01455     t = in;
01456     tnext = t + *t;
01457     tstop = tnext-ABS(tnext[-1]);
01458     t++;
01459     while ( t < tstop ) {
01460         if ( *t == code[k] ) {
01461             i = t[1]; NCOPY(tout,t,i); break;
01462         }
01463         else t += t[1];
01464     }
01465     if ( tout > tstore ) { /* There are vectors in the first term */
01466         t = tnext;
01467         while ( *t ) {
01468             tnext = t + *t;
01469             rstop = tnext - ABS(tnext[-1]);
01470             r = t+1;
01471             if ( r == rstop ) { tstore = tout; goto novectors; }
01472             while ( r < rstop ) {
01473                 if ( *r != code[k] ) { r += r[1]; continue; }
01474                 m = tstore+2;
01475                 while ( m < tout ) {
01476                     for ( i = 2; i < r[1]; i += 2 ) {
01477                         if ( *m == r[i] && m[1] == r[i+1] ) break;
01478                         if ( *m > r[i] || ( *m == r[i] && m[1] > r[i+1] ) ) continue;
01479                         mm = m+2;
01480                         while ( mm < tout ) { mm[-2] = mm[0]; mm[-1] = mm[1]; mm += 2; }
01481                         tout -= 2; tstore[1] -= 2; m -= 2;
01482                         break;
01483                     }
01484                     m += 2;
01485                 }
01486             }
01487             if ( r >= rstop || tout <= tstore+2 ) {
01488                 tout = tstore; break;
01489             }
01490         }
01491         if ( tout > tstore+2 ) { /* Now we have to take out what is in tstore */
01492             t = in; w = in;
01493             while ( *t ) {
01494                 wterm = w;
01495                 tnext = t + *t; t++; w++;
01496                 while ( *t != code[k] ) { i = t[1]; NCOPY(w,t,i); }
01497                 tt = t + t[1]; t += 2; r = tstore+2; ww = w; *w++ = code[k]; w++;
01498                 while ( r < tout && t < tt ) {
01499                     if ( ( *r > *t ) || ( *r == *t && r[1] > t[1] ) )
01500                         { *w++ = *t++; *w++ = *t++; }
01501                     else if ( *r == *t && r[1] == t[1] ) { r += 2; t += 2; }
01502                     else goto CalledFrom;
01503                 }
01504                 if ( r < tout ) goto CalledFrom;
01505                 while ( t < tt ) *w++ = *t++;
01506                 ww[1] = w - ww;
01507                 if ( ww[1] == 2 ) w = ww;
01508                 while ( t < tnext ) *w++ = *t++;
01509                 *wterm = w - wterm;
01510             }
01511             *w = 0;
01512         }
01513         tstore = tout;
01514     }
01515 }
01516 novectors;;
01517 /*
01518 #] VECTOR/DELTA :
01519 #[ FUNCTIONS :
01520 */
01521 t = in;
01522 tnext = t + *t;
01523 tstop = tnext-ABS(tnext[-1]);
01524 t++;
01525 tcom = 0;
01526 while ( t < tstop ) {
01527     if ( *t >= FUNCTION ) {
01528         if ( functions[*t-FUNCTION].commute ) {
01529             if ( tcom == 0 ) { tcom = tstore; }
01530             else {
01531                 for ( i = 0; i < t[1]; i++ ) {
01532                     if ( t[i] != tcom[i] ) {
01533                         MLOCK(ErrorMessageLock);
01534                         MesPrint("GCD or factorization of more than one noncommuting object not
allowed");
01535                         MUNLOCK(ErrorMessageLock);
01536                         goto CalledFrom;
01537                     }

```

```

01538         }
01539     }
01540 }
01541     i = t[1]; NCOPY(tstore,t,i);
01542 }
01543     else t += t[1];
01544 }
01545 if ( tout > tstore ) {
01546     t = tnext;
01547     while ( *t ) {
01548         tnext = t + *t; tstop = tnext - ABS(tnext[-1]); t++;
01549         if ( t == tstop ) goto nofunctions;
01550         r = tstore;
01551         while ( r < tout ) {
01552             tt = t;
01553             while ( tt < tstop ) {
01554                 for ( i = 0; i < r[1]; i++ ) {
01555                     if ( r[i] != tt[i] ) break;
01556                 }
01557                 if ( i == r[1] ) { r += r[1]; goto nextrl; }
01558             }
01559             /*
01560              Not encountered in this term. Scratch from list
01561             */
01562             m = r; mm = r + r[1];
01563             while ( mm < tout ) *m++ = *mm++;
01564             tout = m;
01565 nextrl:;
01566         }
01567         if ( tout <= tstore ) break;
01568         t += *t;
01569     }
01570 }
01571 if ( tout > tstore ) {
01572     /*
01573      Now we have one or more functions left that are common in all terms.
01574      Take them out. We do this one by one.
01575     */
01576     r = tstore;
01577     while ( r < tout ) {
01578         t = in; ww = in; w = ww+1;
01579         while ( *t ) {
01580             tnext = t + *t;
01581             t++;
01582             for(;;) {
01583                 for ( i = 0; i < r[1]; i++ ) {
01584                     if ( t[i] != r[i] ) {
01585                         j = t[1]; NCOPY(w,t,j);
01586                         break;
01587                     }
01588                 }
01589                 if ( i == r[1] ) {
01590                     t += t[1];
01591                     while ( t < tnext ) *w++ = *t++;
01592                     *ww = w - ww;
01593                     break;
01594                 }
01595             }
01596         }
01597         r += r[1];
01598         *w = 0;
01599     }
01600 nofunctions:
01601     tstore = tout;
01602 }
01603 /*
01604  #] FUNCTIONS :
01605  #[ SYMBOL :
01606
01607  We make a list of symbols and their minimal powers.
01608  This includes negative powers. In the end we have to multiply by the
01609  inverse of this list. That takes out all negative powers and leaves
01610  things ready for further processing.
01611  */
01612 tterm = AT.WorkPointer; tt = tterm+1;
01613 tout[0] = SYMBOL; tout[1] = 2;
01614 t = in;
01615 tnext = t + *t; tstop = tnext - ABS(tnext[-1]); t++;
01616 while ( t < tstop ) {
01617     if ( *t == SYMBOL ) {
01618         for ( i = 0; i < t[1]; i++ ) tout[i] = t[i];
01619         break;
01620     }
01621     t += t[1];
01622 }
01623 t = tnext;
01624 while ( *t ) {

```

```

01625         tnext = t + *t; tstop = tnext - ABS(tnext[-1]); t++;
01626         if ( t == tstop ) {
01627             tout[1] = 2;
01628             break;
01629         }
01630         else {
01631             while ( t < tstop ) {
01632                 if ( *t == SYMBOL ) {
01633                     MergeSymbolLists(BHEAD tout,t,-1);
01634                     break;
01635                 }
01636                 t += t[1];
01637             }
01638             t = tnext;
01639         }
01640     }
01641     if ( tout[1] > 2 ) {
01642         t = tout;
01643         tt[0] = t[0]; tt[1] = t[1];
01644         for ( i = 2; i < t[1]; i += 2 ) {
01645             tt[i] = t[i]; tt[i+1] = -t[i+1];
01646         }
01647         tt += tt[1];
01648         tout += tout[1];
01649         action++;
01650     }
01651     /*
01652     #] SYMBOL :
01653     #[ DOTPRODUCT :
01654
01655     We make a list of dotproducts and their minimal powers.
01656     This includes negative powers. In the end we have to multiply by the
01657     inverse of this list. That takes out all negative powers and leaves
01658     things ready for further processing.
01659     */
01660     tout[0] = DOTPRODUCT; tout[1] = 2;
01661     t = in;
01662     while ( *t ) {
01663         tnext = t + *t; tstop = tnext - ABS(tnext[-1]); t++;
01664         if ( t == tstop ) {
01665             tout[1] = 2;
01666             break;
01667         }
01668         while ( t < tstop ) {
01669             if ( *t == DOTPRODUCT ) {
01670                 MergeDotproductLists(BHEAD tout,t,-1);
01671                 break;
01672             }
01673             t += t[1];
01674         }
01675         t = tnext;
01676     }
01677     if ( tout[1] > 2 ) {
01678         t = tout;
01679         tt[0] = t[0]; tt[1] = t[1];
01680         for ( i = 2; i < t[1]; i += 3 ) {
01681             tt[i] = t[i]; tt[i+1] = t[i+1]; tt[i+2] = -t[i+2];
01682         }
01683         tt += tt[1];
01684         tout += tout[1];
01685         action++;
01686     }
01687     /*
01688     #] DOTPRODUCT :
01689     #[ Coefficient :
01690
01691     Now we have to collect the GCD of the numerators
01692     and the LCM of the denominators.
01693     */
01694     AT.WorkPointer = tt;
01695     if ( AN.cmod != 0 ) {
01696         WORD x, ix, ip;
01697         t = in; tnext = t + *t; tstop = tnext - ABS(tnext[-1]);
01698         x = tstop[0];
01699         if ( tnext[-1] < 0 ) x += AC.cmod[0];
01700         if ( GetModInverses(x, (WORD) (AN.cmod[0]), &ix, &ip) ) goto CalledFrom;
01701         *tout++ = x; *tout++ = 1; *tout++ = 3;
01702         *tt++ = ix; *tt++ = 1; *tt++ = 3;
01703     }
01704     else {
01705         GCDBuffer = NumberMalloc("MakeInteger");
01706         GCDBuffer2 = NumberMalloc("MakeInteger");
01707         LCMbuffer = NumberMalloc("MakeInteger");
01708         LCMbuffer2 = NumberMalloc("MakeInteger");
01709         t = in;
01710         tnext = t + *t; length = tnext[-1];
01711         if ( length < 0 ) { sign = -1; length = -length; }

```

```

01712     else { sign = 1; }
01713     tstop = tnext - length;
01714     redlength = (length-1)/2;
01715     for ( i = 0; i < redlength; i++ ) {
01716         GCDbuffer[i] = (UWORD)(tstop[i]);
01717         LCMbuffer[i] = (UWORD)(tstop[redlength+i]);
01718     }
01719     GCDlen = LCMlen = redlength;
01720     while ( GCDbuffer[GCDlen-1] == 0 ) GCDlen--;
01721     while ( LCMbuffer[LCMlen-1] == 0 ) LCMlen--;
01722     t = tnext;
01723     while ( *t ) {
01724         tnext = t + *t; length = ABS(tnext[-1]);
01725         tstop = tnext - length; redlength = (length-1)/2;
01726         len1 = len2 = redlength;
01727         den = tstop + redlength;
01728         while ( tstop[len1-1] == 0 ) len1--;
01729         while ( den[len2-1] == 0 ) len2--;
01730         if ( GCDlen == 1 && GCDbuffer[0] == 1 ) {}
01731         else {
01732             GcdLong(BHEAD (UWORD *)tstop, len1, GCDbuffer, GCDlen, GCDbuffer2, &GCDlen2);
01733             ap = GCDbuffer; GCDbuffer = GCDbuffer2; GCDbuffer2 = ap;
01734             a = GCDlen; GCDlen = GCDlen2; GCDlen2 = a;
01735         }
01736         if ( len2 == 1 && den[0] == 1 ) {}
01737         else {
01738             GcdLong(BHEAD LCMbuffer, LCMlen, (UWORD *)den, len2, LCMbuffer2, &LCMlen2);
01739             DivLong((UWORD *)den, len2, LCMbuffer2, LCMlen2,
01740                 GCDbuffer2, &GCDlen2, (UWORD *)AT.WorkPointer, &a);
01741             Mullong(LCMbuffer, LCMlen, GCDbuffer2, GCDlen2, LCMbuffer2, &LCMlen2);
01742             ap = LCMbuffer; LCMbuffer = LCMbuffer2; LCMbuffer2 = ap;
01743             a = LCMlen; LCMlen = LCMlen2; LCMlen2 = a;
01744         }
01745         t = tnext;
01746     }
01747     if ( GCDlen != 1 || GCDbuffer[0] != 1 || LCMlen != 1 || LCMbuffer[0] != 1 ) {
01748         redlength = GCDlen; if ( LCMlen > GCDlen ) redlength = LCMlen;
01749         for ( i = 0; i < GCDlen; i++ ) *tout++ = (WORD)(GCDbuffer[i]);
01750         for ( ; i < redlength; i++ ) *tout++ = 0;
01751         for ( i = 0; i < LCMlen; i++ ) *tout++ = (WORD)(LCMbuffer[i]);
01752         for ( ; i < redlength; i++ ) *tout++ = 0;
01753         *tout++ = (2*redlength+1)*sign;
01754         for ( i = 0; i < LCMlen; i++ ) *ttt++ = (WORD)(LCMbuffer[i]);
01755         for ( ; i < redlength; i++ ) *ttt++ = 0;
01756         for ( i = 0; i < GCDlen; i++ ) *ttt++ = (WORD)(GCDbuffer[i]);
01757         for ( ; i < redlength; i++ ) *ttt++ = 0;
01758         *ttt++ = (2*redlength+1)*sign;
01759         action++;
01760     }
01761     else {
01762         *tout++ = 1; *tout++ = 1; *tout++ = 3*sign;
01763         *ttt++ = 1; *ttt++ = 1; *ttt++ = 3*sign;
01764         if ( sign != 1 ) action++;
01765     }
01766     *tout = 0;
01767     NumberFree(LCMbuffer2, "MakeInteger");
01768     NumberFree(LCMbuffer, "MakeInteger");
01769     NumberFree(GCDbuffer2, "MakeInteger");
01770     NumberFree(GCDbuffer, "MakeInteger");
01771 }
01772 /*
01773 #] Coefficient :
01774 #[ Multiply by the inverse content :
01775 */
01776 if ( action ) {
01777     *tterm = tt - tterm;
01778     AT.WorkPointer = tt;
01779     inp = MultiplyWithTerm(BHEAD in, tterm, 2);
01780     AT.WorkPointer = tterm;
01781     in = inp;
01782 }
01783 /*
01784 #] Multiply by the inverse content :
01785 */
01786 *term = tout - term;
01787 AT.WorkPointer = tterm;
01788 return(in);
01789 CalledFrom:
01790 MLOCK(ErrorMessageLock);
01791 MesCall("TakeContent");
01792 MUNLOCK(ErrorMessageLock);
01793 return(0);
01794 }
01795
01796 /*
01797 #] TakeContent :
01798 #[ MergeSymbolLists :

```

```

01799
01800     Merges the extra list into the old.
01801     If par == -1 we take minimum powers
01802     If par == 1 we take maximum powers
01803     If par == 0 we take minimum of the absolute value of the powers
01804             if one is positive and the other negative we get zero.
01805     We assume that the symbols are in order in both lists
01806 */
01807
01808 int MergeSymbolLists(PHEAD WORD *old, WORD *extra, int par)
01809 {
01810     GETBIDENTITY
01811     WORD *new = TermMalloc("MergeSymbolLists");
01812     WORD *t1, *t2, *fill;
01813     int i1, i2;
01814     fill = new + 2; *new = SYMBOL;
01815     i1 = old[1] - 2; i2 = extra[1] - 2;
01816     t1 = old + 2; t2 = extra + 2;
01817     switch ( par ) {
01818     case -1:
01819         while ( i1 > 0 && i2 > 0 ) {
01820             if ( *t1 > *t2 ) {
01821                 if ( t2[1] < 0 ) { *fill++ = *t2++; *fill++ = *t2++; }
01822                 else t2 += 2;
01823                 i2 -= 2;
01824             }
01825             else if ( *t1 < *t2 ) {
01826                 if ( t1[1] < 0 ) { *fill++ = *t1++; *fill++ = *t1++; }
01827                 else t1 += 2;
01828                 i1 -= 2;
01829             }
01830             else if ( t1[1] < t2[1] ) {
01831                 *fill++ = *t1++; *fill++ = *t1++; t2 += 2;
01832                 i1 -= 2; i2 -= 2;
01833             }
01834             else {
01835                 *fill++ = *t2++; *fill++ = *t2++; t1 += 2;
01836                 i1 -= 2; i2 -= 2;
01837             }
01838         }
01839         for ( ; i1 > 0; i1 -= 2 ) {
01840             if ( t1[1] < 0 ) { *fill++ = *t1++; *fill++ = *t1++; }
01841             else t1 += 2;
01842         }
01843         for ( ; i2 > 0; i2 -= 2 ) {
01844             if ( t2[1] < 0 ) { *fill++ = *t2++; *fill++ = *t2++; }
01845             else t2 += 2;
01846         }
01847         break;
01848     case 1:
01849         while ( i1 > 0 && i2 > 0 ) {
01850             if ( *t1 > *t2 ) {
01851                 if ( t2[1] > 0 ) { *fill++ = *t2++; *fill++ = *t2++; }
01852                 else t2 += 2;
01853                 i2 -= 2;
01854             }
01855             else if ( *t1 < *t2 ) {
01856                 if ( t1[1] > 0 ) { *fill++ = *t1++; *fill++ = *t1++; }
01857                 else t1 += 2;
01858                 i1 -= 2;
01859             }
01860             else if ( t1[1] > t2[1] ) {
01861                 *fill++ = *t1++; *fill++ = *t1++; t2 += 2;
01862                 i1 -= 2; i2 -= 2;
01863             }
01864             else {
01865                 *fill++ = *t2++; *fill++ = *t2++; t1 += 2;
01866                 i1 -= 2; i2 -= 2;
01867             }
01868         }
01869         for ( ; i1 > 0; i1 -= 2 ) {
01870             if ( t1[1] > 0 ) { *fill++ = *t1++; *fill++ = *t1++; }
01871             else t1 += 2;
01872         }
01873         for ( ; i2 > 0; i2 -= 2 ) {
01874             if ( t2[1] > 0 ) { *fill++ = *t2++; *fill++ = *t2++; }
01875             else t2 += 2;
01876         }
01877         break;
01878     case 0:
01879         while ( i1 > 0 && i2 > 0 ) {
01880             if ( *t1 > *t2 ) {
01881                 t2 += 2; i2 -= 2;
01882             }
01883             else if ( *t1 < *t2 ) {
01884                 t1 += 2; i1 -= 2;
01885             }

```

```

01886         else if ( ( t1[1] > 0 ) && ( t2[1] < 0 ) ) { t1 += 2; t2 += 2; i1 -= 2; i2 -= 2; }
01887         else if ( ( t1[1] < 0 ) && ( t2[1] > 0 ) ) { t1 += 2; t2 += 2; i1 -= 2; i2 -= 2; }
01888         else if ( t1[1] > 0 ) {
01889             if ( t1[1] < t2[1] ) {
01890                 *fill++ = *t1++; *fill++ = *t1++; t2 += 2; i2 -= 2;
01891             }
01892             else {
01893                 *fill++ = *t2++; *fill++ = *t2++; t1 += 2; i1 -= 2;
01894             }
01895         }
01896         else {
01897             if ( t2[1] < t1[1] ) {
01898                 *fill++ = *t2++; *fill++ = *t2++; t1 += 2; i1 -= 2; i2 -= 2;
01899             }
01900             else {
01901                 *fill++ = *t1++; *fill++ = *t1++; t2 += 2; i1 -= 2; i2 -= 2;
01902             }
01903         }
01904     }
01905     for ( ; i1 > 0; i1-- ) *fill++ = *t1++;
01906     for ( ; i2 > 0; i2-- ) *fill++ = *t2++;
01907     break;
01908 }
01909 i1 = new[1] = fill - new;
01910 t2 = new; t1 = old; NCOPY(t1,t2,i1);
01911 TermFree(new,"MergeSymbolLists");
01912 return(0);
01913 }
01914
01915 /*
01916     #] MergeSymbolLists :
01917     #[ MergeDotproductLists :
01918
01919     Merges the extra list into the old.
01920     If par == -1 we take minimum powers
01921     If par == 1 we take maximum powers
01922     If par == 0 we take minimum of the absolute value of the powers
01923         if one is positive and the other negative we get zero.
01924     We assume that the dotproducts are in order in both lists
01925 */
01926
01927 int MergeDotproductLists(PHEAD WORD *old, WORD *extra, int par)
01928 {
01929     GETBIDENTITY
01930     WORD *new = TermMalloc("MergeDotproductLists");
01931     WORD *t1, *t2, *fill;
01932     int i1,i2;
01933     fill = new + 2;
01934     i1 = old[1] - 2; i2 = extra[1] - 2;
01935     t1 = old + 2; t2 = extra + 2;
01936     switch ( par ) {
01937         case -1:
01938             while ( i1 > 0 && i2 > 0 ) {
01939                 if ( ( *t1 > *t2 ) || ( *t1 == *t2 && t1[1] > t2[1] ) ) {
01940                     if ( t2[2] < 0 ) { *fill++ = *t2++; *fill++ = *t2++; *fill++ = *t2++; }
01941                     else t2 += 3;
01942                 }
01943                 else if ( ( *t1 < *t2 ) || ( *t1 == *t2 && t1[1] < t2[1] ) ) {
01944                     if ( t1[2] < 0 ) { *fill++ = *t1++; *fill++ = *t1++; *fill++ = *t1++; }
01945                     else t1 += 3;
01946                 }
01947                 else if ( t1[2] < t2[2] ) {
01948                     *fill++ = *t1++; *fill++ = *t1++; *fill++ = *t1++; t2 += 3;
01949                 }
01950                 else {
01951                     *fill++ = *t2++; *fill++ = *t2++; *fill++ = *t2++; t1 += 3;
01952                 }
01953             }
01954             break;
01955         case 1:
01956             while ( i1 > 0 && i2 > 0 ) {
01957                 if ( ( *t1 > *t2 ) || ( *t1 == *t2 && t1[1] > t2[1] ) ) {
01958                     if ( t2[2] > 0 ) { *fill++ = *t2++; *fill++ = *t2++; *fill++ = *t2++; }
01959                     else t2 += 3;
01960                 }
01961                 else if ( ( *t1 < *t2 ) || ( *t1 == *t2 && t1[1] < t2[1] ) ) {
01962                     if ( t1[2] > 0 ) { *fill++ = *t1++; *fill++ = *t1++; *fill++ = *t1++; }
01963                     else t1 += 3;
01964                 }
01965                 else if ( t1[2] > t2[2] ) {
01966                     *fill++ = *t1++; *fill++ = *t1++; *fill++ = *t1++; t2 += 3;
01967                 }
01968                 else {
01969                     *fill++ = *t2++; *fill++ = *t2++; *fill++ = *t2++; t1 += 3;
01970                 }
01971             }
01972             break;

```

```

01973         case 0:
01974             while ( i1 > 0 && i2 > 0 ) {
01975                 if ( ( *t1 > *t2 ) || ( *t1 == *t2 && t1[1] > t2[1] ) ) {
01976                     t2 += 3;
01977                 }
01978                 else if ( ( *t1 < *t2 ) || ( *t1 == *t2 && t1[1] < t2[1] ) ) {
01979                     t1 += 3;
01980                 }
01981                 else if ( ( t1[2] > 0 ) && ( t2[2] < 0 ) ) { t1 += 3; t2 += 3; }
01982                 else if ( ( t1[2] < 0 ) && ( t2[2] > 0 ) ) { t1 += 3; t2 += 3; }
01983                 else if ( t1[2] > 0 ) {
01984                     if ( t1[2] < t2[2] ) {
01985                         *fill++ = *t1++; *fill++ = *t1++; *fill++ = *t1++; t2 += 3;
01986                     }
01987                     else {
01988                         *fill++ = *t2++; *fill++ = *t2++; *fill++ = *t2++; t1 += 3;
01989                     }
01990                 }
01991                 else {
01992                     if ( t2[2] < t1[2] ) {
01993                         *fill++ = *t2++; *fill++ = *t2++; *fill++ = *t2++; t1 += 3;
01994                     }
01995                     else {
01996                         *fill++ = *t1++; *fill++ = *t1++; *fill++ = *t1++; t2 += 3;
01997                     }
01998                 }
01999             }
02000             break;
02001         }
02002         i1 = new[1] = fill - new;
02003         t2 = new; t1 = old; NCOPY(t1,t2,i1);
02004         TermFree(new, "MergeDotproductLists");
02005         return(0);
02006     }
02007
02008     /*
02009         #] MergeDotproductLists :
02010         #[ CreateExpression :
02011
02012         Looks for the expression in the argument, reads it and puts it
02013         in a buffer. Returns the address of the buffer.
02014         We send the expression through the Generator system, because there
02015         may be unsubstituted (sub)expressions as in
02016         Local F = (a+b);
02017         Local G = gcd_(F,...);
02018     */
02019
02020     WORD *CreateExpression(PHEAD WORD nexp)
02021     {
02022         GETBIDENTITY
02023         CBUF *C = cbuf+AC.cbunum;
02024         POSITION startposition, oldposition;
02025         FILEHANDLE *fi;
02026         WORD *term, *oldipointer = AR.CompressPointer;
02027     ;
02028         switch ( Expressions[nexp].status ) {
02029             case HIDDENLEXPRESSION:
02030             case HIDDENGEXPRESSION:
02031             case DROPHLEXPRESSION:
02032             case DROPHGEXPRESSION:
02033             case UNHIDELEXPRESSION:
02034             case UNHIDEGEXPRESSION:
02035                 AR.GetOneFile = 2; fi = AR.hidefile;
02036                 break;
02037             default:
02038                 AR.GetOneFile = 0; fi = AR.infile;
02039                 break;
02040         }
02041         SeekScratch(fi,&oldposition);
02042         startposition = AS.OldOnFile[nexp];
02043         term = AT.WorkPointer;
02044         if ( GetOneTerm(BHEAD term,fi,&startposition,0) <= 0 ) goto CalledFrom;
02045         NewSort (BHEAD0);
02046         AR.CompressPointer = oldipointer;
02047         while ( GetOneTerm(BHEAD term,fi,&startposition,0) > 0 ) {
02048             AT.WorkPointer = term + *term;
02049             if ( Generator(BHEAD term,C->numlhs) ) {
02050                 LowerSortLevel();
02051                 goto CalledFrom;
02052             }
02053             AR.CompressPointer = oldipointer;
02054         }
02055         AT.WorkPointer = term;
02056         if ( EndSort (BHEAD (WORD *) ((void *) (&term)),2) < 0 ) goto CalledFrom;
02057         SetScratch(fi,&oldposition);
02058         return (term);
02059     CalledFrom:

```



```

02060     MLOCK(ErrorMessageLock);
02061     MesCall("CreateExpression");
02062     MUNLOCK(ErrorMessageLock);
02063     Terminate(-1);
02064     return(0);
02065 }
02066
02067 /*
02068     #] CreateExpression :
02069     #[ GCDterms :      GCD of two terms
02070
02071     Computes the GCD of two terms.
02072     Output in termout.
02073     termout may overlap with term1.
02074 */
02075
02076 int GCDterms(PHEAD WORD *term1, WORD *term2, WORD *termout)
02077 {
02078     GETBIDENTITY
02079     WORD *t1, *t1stop, *t1next, *t2, *t2stop, *t2next, *tout, *tt1, *tt2;
02080     int count1, count2, i, ii, x1, sign;
02081     WORD length1, length2;
02082     t1 = term1 + *term1; t1stop = t1 - ABS(t1[-1]); t1 = term1+1;
02083     t2 = term2 + *term2; t2stop = t2 - ABS(t2[-1]); t2 = term2+1;
02084     tout = termout+1;
02085     while ( t1 < t1stop ) {
02086         t1next = t1 + t1[1];
02087         t2 = term2+1;
02088         if ( *t1 == SYMBOL ) {
02089             while ( t2 < t2stop && *t2 != SYMBOL ) t2 += t2[1];
02090             if ( t2 < t2stop && *t2 == SYMBOL ) {
02091                 t2next = t2+t2[1];
02092                 tt1 = t1+2; tt2 = t2+2; count1 = 0;
02093                 while ( tt1 < t1next && tt2 < t2next ) {
02094                     if ( *tt1 < *tt2 ) tt1 += 2;
02095                     else if ( *tt1 > *tt2 ) tt2 += 2;
02096                     else if ( ( tt1[1] > 0 && tt2[1] < 0 ) ||
02097                             ( tt2[1] > 0 && tt1[1] < 0 ) ) {
02098                         tt1 += 2; tt2 += 2;
02099                     }
02100                     else {
02101                         x1 = tt1[1];
02102                         if ( tt1[1] < 0 ) { if ( tt2[1] > x1 ) x1 = tt2[1]; }
02103                         else { if ( tt2[1] < x1 ) x1 = tt2[1]; }
02104                         tout[count1+2] = *tt1;
02105                         tout[count1+3] = x1;
02106                         tt1 += 2; tt2 += 2;
02107                         count1 += 2;
02108                     }
02109                 }
02110                 if ( count1 > 0 ) {
02111                     *tout = SYMBOL; tout[1] = count1+2; tout += tout[1];
02112                 }
02113             }
02114         }
02115         else if ( *t1 == DOTPRODUCT ) {
02116             while ( t2 < t2stop && *t2 != DOTPRODUCT ) t2 += t2[1];
02117             if ( t2 < t2stop && *t2 == DOTPRODUCT ) {
02118                 t2next = t2+t2[1];
02119                 tt1 = t1+2; tt2 = t2+2; count1 = 0;
02120                 while ( tt1 < t1next && tt2 < t2next ) {
02121                     if ( *tt1 < *tt2 || ( *tt1 == *tt2 && tt1[1] < tt2[1] ) ) tt1 += 3;
02122                     else if ( *tt1 > *tt2 || ( *tt1 == *tt2 && tt1[1] > tt2[1] ) ) tt2 += 3;
02123                     else if ( ( tt1[2] > 0 && tt2[2] < 0 ) ||
02124                             ( tt2[2] > 0 && tt1[2] < 0 ) ) {
02125                         tt1 += 3; tt2 += 3;
02126                     }
02127                     else {
02128                         x1 = tt1[2];
02129                         if ( tt1[2] < 0 ) { if ( tt2[2] > x1 ) x1 = tt2[2]; }
02130                         else { if ( tt2[2] < x1 ) x1 = tt2[2]; }
02131                         tout[count1+2] = *tt1;
02132                         tout[count1+3] = tt1[1];
02133                         tout[count1+4] = x1;
02134                         tt1 += 3; tt2 += 3;
02135                         count1 += 3;
02136                     }
02137                 }
02138                 if ( count1 > 0 ) {
02139                     *tout = DOTPRODUCT; tout[1] = count1+2; tout += tout[1];
02140                 }
02141             }
02142         }
02143         else if ( *t1 == VECTOR ) {
02144             while ( t2 < t2stop && *t2 != VECTOR ) t2 += t2[1];
02145             if ( t2 < t2stop && *t2 == VECTOR ) {
02146                 t2next = t2+t2[1];

```

```

02147         tt1 = t1+2; tt2 = t2+2; count1 = 0;
02148         while ( tt1 < tlnext && tt2 < t2next ) {
02149             if ( *tt1 < *tt2 || ( *tt1 == *tt2 && tt1[1] < tt2[1] ) ) tt1 += 2;
02150             else if ( *tt1 > *tt2 || ( *tt1 == *tt2 && tt1[1] > tt2[1] ) ) tt2 += 2;
02151             else {
02152                 tout[count1+2] = *tt1;
02153                 tout[count1+3] = tt1[1];
02154                 tt1 += 2; tt2 += 2;
02155                 count1 += 2;
02156             }
02157         }
02158         if ( count1 > 0 ) {
02159             *tout = VECTOR; tout[1] = count1+2; tout += tout[1];
02160         }
02161     }
02162 }
02163 else if ( *t1 == INDEX ) {
02164     while ( t2 < t2stop && *t2 != INDEX ) t2 += t2[1];
02165     if ( t2 < t2stop && *t2 == INDEX ) {
02166         t2next = t2+t2[1];
02167         tt1 = t1+2; tt2 = t2+2; count1 = 0;
02168         while ( tt1 < tlnext && tt2 < t2next ) {
02169             if ( *tt1 < *tt2 ) tt1 += 1;
02170             else if ( *tt1 > *tt2 ) tt2 += 1;
02171             else {
02172                 tout[count1+2] = *tt1;
02173                 tt1 += 1; tt2 += 1;
02174                 count1 += 1;
02175             }
02176         }
02177         if ( count1 > 0 ) {
02178             *tout = INDEX; tout[1] = count1+2; tout += tout[1];
02179         }
02180     }
02181 }
02182 else if ( *t1 == DELTA ) {
02183     while ( t2 < t2stop && *t2 != DELTA ) t2 += t2[1];
02184     if ( t2 < t2stop && *t2 == DELTA ) {
02185         t2next = t2+t2[1];
02186         tt1 = t1+2; tt2 = t2+2; count1 = 0;
02187         while ( tt1 < tlnext && tt2 < t2next ) {
02188             if ( *tt1 < *tt2 || ( *tt1 == *tt2 && tt1[1] < tt2[1] ) ) tt1 += 2;
02189             else if ( *tt1 > *tt2 || ( *tt1 == *tt2 && tt1[1] > tt2[1] ) ) tt2 += 2;
02190             else {
02191                 tout[count1+2] = *tt1;
02192                 tout[count1+3] = tt1[1];
02193                 tt1 += 2; tt2 += 2;
02194                 count1 += 2;
02195             }
02196         }
02197         if ( count1 > 0 ) {
02198             *tout = DELTA; tout[1] = count1+2; tout += tout[1];
02199         }
02200     }
02201 }
02202 else if ( *t1 >= FUNCTION ) { /* noncommuting functions? Forbidden! */
02203     /*
02204         Count how many times this function occurs.
02205         Then count how many times it is in term2.
02206     */
02207     count1 = 1;
02208     while ( tlnext < t1stop && *t1 == *tlnext && t1[1] == tlnext[1] ) {
02209         for ( i = 2; i < t1[1]; i++ ) {
02210             if ( t1[i] != tlnext[i] ) break;
02211         }
02212         if ( i < t1[1] ) break;
02213         count1++;
02214         tlnext += tlnext[1];
02215     }
02216     count2 = 0;
02217     while ( t2 < t2stop ) {
02218         if ( *t2 == *t1 && t2[1] == t1[1] ) {
02219             for ( i = 2; i < t1[1]; i++ ) {
02220                 if ( t2[i] != t1[i] ) break;
02221             }
02222             if ( i >= t1[1] ) count2++;
02223         }
02224         t2 += t2[1];
02225     }
02226     if ( count1 < count2 ) count2 = count1; /* number of common occurrences */
02227     if ( count2 > 0 ) {
02228         if ( tout == t1 ) {
02229             while ( count2 > 0 ) { tout += tout[1]; count2--; }
02230         }
02231         else {
02232             i = t1[1]*count2;
02233             NCOPY(tout,t1,i);

```

```

02234         }
02235     }
02236 }
02237 t1 = tlnext;
02238 }
02239 /*
02240     Now the coefficients. They are in t1stop and t2stop. Should go to tout.
02241 */
02242 sign = 1;
02243 length1 = term1[*term1-1]; ii = i = ABS(length1); t1 = t1stop;
02244 if ( t1 != tout ) { NCOPY(tout,t1,i); tout -= ii; }
02245 length2 = term2[*term2-1];
02246 if ( length1 < 0 && length2 < 0 ) sign = -1;
02247 if ( AccumGCD(BHEAD (UWORD *)tout,&length1,(UWORD *)t2stop,length2) ) {
02248     MLOCK(ErrorMessageLock);
02249     MesCall("GCDterms");
02250     MUNLOCK(ErrorMessageLock);
02251     SETERROR(-1)
02252 }
02253 if ( sign < 0 && length1 > 0 ) length1 = -length1;
02254 tout += ABS(length1); tout[-1] = length1;
02255 *termout = tout - termout; *tout = 0;
02256 return(0);
02257 }
02258 /*
02259     #] GCDterms :
02260     #[ ReadPolyRatFun :
02261     */
02262 */
02263
02264 int ReadPolyRatFun(PHEAD WORD *term)
02265 {
02266     WORD *oldworkpointer = AT.WorkPointer;
02267     int flag, i;
02268     WORD *t, *fun, *nextt, *num, *den, *t1, *t2, size, numsize, densize;
02269     WORD *term1, *term2, *confree1, *confree2, *gcd, *num1, *den1, move, *newnum, *newden;
02270     WORD *tstop, *m1, *m2;
02271     WORD oldsorttype = AR.SortType;
02272     COMPARE oldcompareroutine = (COMPARE) (AR.CompareRoutine);
02273     AR.SortType = SORTHIGFIRST;
02274     AR.CompareRoutine = (COMPAREDUMMY) (&CompareSymbols);
02275
02276     tstop = term + *term; tstop -= ABS(tstop[-1]);
02277     if ( term + *term == AT.WorkPointer ) flag = 1;
02278     else flag = 0;
02279     t = term+1;
02280     while ( t < tstop ) {
02281         if ( *t != AR.PolyFun ) { t += t[1]; continue; }
02282         if ( ( t[2] & MUSTCLEANPRF ) == 0 ) { t += t[1]; continue; }
02283         fun = t;
02284         nextt = t + t[1];
02285         if ( fun[1] > FUNHEAD && fun[FUNHEAD] == -SNUMBER && fun[FUNHEAD+1] == 0 )
02286             { *term = 0; break; }
02287         if ( FromPolyRatFun(BHEAD fun, &num, &den) > 0 ) { t = nextt; continue; }
02288         if ( *num == ARGHEAD ) { *term = 0; break; }
02289     /*
02290         Now we have num and den. Both are in general argument notation,
02291         but can also be used as expressions as in num+ARGHEAD, den+ARGHEAD.
02292         We need the gcd. For this we have to take out the contents
02293         because PreGCD does not like contents.
02294     */
02295     term1 = TermMalloc("ReadPolyRatFun");
02296     term2 = TermMalloc("ReadPolyRatFun");
02297     confree1 = TakeSymbolContent(BHEAD num+ARGHEAD,term1);
02298     confree2 = TakeSymbolContent(BHEAD den+ARGHEAD,term2);
02299     GCDclean(BHEAD term1,term2);
02300     /* gcd = PreGCD(BHEAD confree1,confree2,1); */
02301     gcd = poly_gcd(BHEAD confree1,confree2,1);
02302     newnum = PolyDiv(BHEAD confree1,gcd,"ReadPolyRatFun");
02303     newden = PolyDiv(BHEAD confree2,gcd,"ReadPolyRatFun");
02304     TermFree(confree2,"ReadPolyRatFun");
02305     TermFree(confree1,"ReadPolyRatFun");
02306     num1 = MULfunc(BHEAD term1,newnum);
02307     den1 = MULfunc(BHEAD term2,newden);
02308     TermFree(newnum,"ReadPolyRatFun");
02309     TermFree(newden,"ReadPolyRatFun");
02310     /* M_free(gcd,"poly_gcd"); */
02311     TermFree(gcd,"poly_gcd");
02312     TermFree(term1,"ReadPolyRatFun");
02313     TermFree(term2,"ReadPolyRatFun");
02314     /*
02315         Now we can put the function back together.
02316         Notice that we cannot use ToFast, because there is no reservation
02317         for the header of the argument. Fortunately there are only two
02318         types of fast arguments.
02319     */
02320     if ( num1[0] == 4 && num1[4] == 0 && num1[2] == 1 && num1[1] > 0 ) {

```

```

02321         numsize = 2; numl[0] = -SNUMBER;
02322         if ( numl[3] < 0 ) numl[1] = -numl[1];
02323     }
02324     else if ( numl[0] == 8 && numl[8] == 0 && numl[7] == 3 && numl[6] == 1
02325         && numl[5] == 1 && numl[1] == SYMBOL && numl[4] == 1 ) {
02326         numsize = 2; numl[0] = -SYMBOL; numl[1] = numl[3];
02327     }
02328     else { m1 = numl; while ( *m1 ) m1 += *m1; numsize = (m1-numl)+ARGHEAD; }
02329     if ( denl[0] == 4 && denl[4] == 0 && denl[2] == 1 && denl[1] > 0 ) {
02330         densize = 2; denl[0] = -SNUMBER;
02331         if ( denl[3] < 0 ) denl[1] = -denl[1];
02332     }
02333     else if ( denl[0] == 8 && denl[8] == 0 && denl[7] == 3 && denl[6] == 1
02334         && denl[5] == 1 && denl[1] == SYMBOL && denl[4] == 1 ) {
02335         densize = 2; denl[0] = -SYMBOL; denl[1] = denl[3];
02336     }
02337     else { m2 = denl; while ( *m2 ) m2 += *m2; densize = (m2-denl)+ARGHEAD; }
02338     size = FUNHEAD+numsize+densize;
02339
02340     if ( size > fun[1] ) {
02341         move = size - fun[1];
02342         t1 = term+*term; t2 = t1+move;
02343         while ( t1 > nextt ) *--t2 = *--t1;
02344         tstop += move; nextt += move;
02345         *term += move;
02346     }
02347     else if ( size < fun[1] ) {
02348         move = fun[1]-size;
02349         t2 = fun+size; t1 = nextt;
02350         tstop -= move; nextt -= move;
02351         t = term+*term;
02352         while ( t1 < t ) *t2++ = *t1++;
02353         *term -= move;
02354     }
02355     else { /* no need to move anything */ }
02356     fun[1] = size; fun[2] = 0;
02357     t2 = fun+FUNHEAD; t1 = numl;
02358     if ( *numl < 0 ) { *t2++ = numl[0]; *t2++ = numl[1]; }
02359     else { *t2++ = numsize; *t2++ = 0; FILLARG(t2);
02360         i = numsize-ARGHEAD; NCOPY(t2,t1,i) }
02361     t1 = denl;
02362     if ( *denl < 0 ) { *t2++ = denl[0]; *t2++ = denl[1]; }
02363     else { *t2++ = densize; *t2++ = 0; FILLARG(t2);
02364         i = densize-ARGHEAD; NCOPY(t2,t1,i) }
02365
02366     TermFree(numl,"MULfunc");
02367     TermFree(denl,"MULfunc");
02368     t = nextt;
02369 }
02370
02371 if ( flag ) AT.WorkPointer = term + *term;
02372 else AT.WorkPointer = oldworkpointer;
02373 AR.CompareRoutine = (COMPAREDUMMY)oldcompareroutine;
02374 AR.SortType = oldsorttype;
02375 return(0);
02376 }
02377
02378 /*
02379     #] ReadPolyRatFun :
02380     #[ FromPolyRatFun :
02381 */
02382
02383 int FromPolyRatFun(PHEAD WORD *fun, WORD **numout, WORD **denout)
02384 {
02385     WORD *nextfun, *tt, *num, *den;
02386     int i;
02387     nextfun = fun + fun[1];
02388     fun += FUNHEAD;
02389     num = AT.WorkPointer;
02390     if ( *fun < 0 ) {
02391         if ( *fun != -SNUMBER && *fun != -SYMBOL ) goto Improper;
02392         ToGeneral(fun,num,0);
02393         tt = num + *num; *tt++ = 0;
02394         fun += 2;
02395     }
02396     else { i = *fun; tt = num; NCOPY(tt,fun,i); *tt++ = 0; }
02397     den = tt;
02398     if ( *fun < 0 ) {
02399         if ( *fun != -SNUMBER && *fun != -SYMBOL ) goto Improper;
02400         ToGeneral(fun,den,0);
02401         tt = den + *den; *tt++ = 0;
02402         fun += 2;
02403     }
02404     else { i = *fun; tt = den; NCOPY(tt,fun,i); *tt++ = 0; }
02405     *numout = num; *denout = den;
02406     if ( fun != nextfun ) { return(1); }
02407     AT.WorkPointer = tt;

```

```

02408     return(0);
02409 Improper:
02410     MLOCK(ErrorMessageLock);
02411     MesPrint("Improper use of PolyRatFun");
02412     MesCall("FromPolyRatFun");
02413     MUNLOCK(ErrorMessageLock);
02414     SETERROR(-1);
02415 }
02416
02417 /*
02418     #] FromPolyRatFun :
02419     #[ TakeSymbolContent :
02420 */
02434 WORD *TakeSymbolContent (PHEAD WORD *in, WORD *term)
02435 {
02436     GETBIDENTITY
02437     WORD *t, *tstop, *tout, *tstore;
02438     WORD *tnext, *tt, *tterm;
02439     WORD *inp, a, *den, *oldworkpointer = AT.WorkPointer;
02440     int i, action = 0, sign, first;
02441     UWORD *GCDbuffer, *GCDbuffer2, *LCMbuffer, *LCMbuffer2, *ap;
02442     WORD GCDlen, GCDlen2, LCMlen, LCMlen2, length, redlength, len1, len2;
02443     LONG j;
02444     tout = tstore = term+1;
02445 /*
02446     #[ SYMBOL :
02447
02448     We make a list of symbols and their minimal powers.
02449     This includes negative powers. In the end we have to multiply by the
02450     inverse of this list. That takes out all negative powers and leaves
02451     things ready for further processing.
02452 */
02453     tterm = AT.WorkPointer; tt = tterm+1;
02454     tout[0] = SYMBOL; tout[1] = 2;
02455     t = in; first = 1;
02456     while ( *t ) {
02457         tnext = t + *t; tstop = tnext - ABS(tnext[-1]); t++;
02458         while ( t < tstop ) {
02459             if ( first ) {
02460                 if ( *t == SYMBOL ) {
02461                     for ( i = 0; i < t[1]; i++ ) tout[i] = t[i];
02462                     goto didwork;
02463                 }
02464                 else {
02465                     MLOCK(ErrorMessageLock);
02466                     MesPrint ((char*)"ERROR: polynomials and polyratfuns must contain symbols only");
02467                     MUNLOCK(ErrorMessageLock);
02468                     Terminate(1);
02469                 }
02470             }
02471             else if ( *t == SYMBOL ) {
02472                 MergeSymbolLists(BHEAD tout,t,-1);
02473                 goto didwork;
02474             }
02475             else {
02476                 t += t[1];
02477             }
02478         }
02479 /*
02480         Here we come when there were no symbols. Only keep the negative ones.
02481 */
02482         if ( first == 0 ) {
02483             int j = 2;
02484             for ( i = 2; i < tout[1]; i += 2 ) {
02485                 if ( tout[i+1] < 0 ) {
02486                     if ( i == j ) { j += 2; }
02487                     else { tout[j] = tout[i]; tout[j+1] = tout[i+1]; j += 2; }
02488                 }
02489             }
02490             tout[1] = j;
02491         }
02492     didwork:;
02493     first = 0;
02494     t = tnext;
02495 }
02496 if ( tout[1] > 2 ) {
02497     t = tout;
02498     tt[0] = t[0]; tt[1] = t[1];
02499     for ( i = 2; i < t[1]; i += 2 ) {
02500         tt[i] = t[i]; tt[i+1] = -t[i+1];
02501     }
02502     tt += tt[1];
02503     tout += tout[1];
02504     action++;
02505 }
02506 /*
02507     #] SYMBOL :

```

```

02508     #[ Coefficient :
02509
02510     Now we have to collect the GCD of the numerators
02511     and the LCM of the denominators.
02512 */
02513     AT.WorkPointer = tt;
02514     if ( AN.cmod != 0 ) {
02515         WORD x, ix, ip;
02516         t = in; tnext = t + *t; tstop = tnext - ABS(tnext[-1]);
02517         x = tstop[0];
02518         if ( tnext[-1] < 0 ) x += AC.cmod[0];
02519         if ( GetModInverses(x, (WORD) (AN.cmod[0]), &ix, &ip) ) goto CalledFrom;
02520         *tout++ = x; *tout++ = 1; *tout++ = 3;
02521         *tt++ = ix; *tt++ = 1; *tt++ = 3;
02522     }
02523     else {
02524         GCDbuffer = NumberMalloc("MakeInteger");
02525         GCDbuffer2 = NumberMalloc("MakeInteger");
02526         LCMbuffer = NumberMalloc("MakeInteger");
02527         LCMbuffer2 = NumberMalloc("MakeInteger");
02528         t = in;
02529         tnext = t + *t; length = tnext[-1];
02530         if ( length < 0 ) { sign = -1; length = -length; }
02531         else { sign = 1; }
02532         tstop = tnext - length;
02533         redlength = (length-1)/2;
02534         for ( i = 0; i < redlength; i++ ) {
02535             GCDbuffer[i] = (UWORD) (tstop[i]);
02536             LCMbuffer[i] = (UWORD) (tstop[redlength+i]);
02537         }
02538         GCDlen = LCMlen = redlength;
02539         while ( GCDbuffer[GCDlen-1] == 0 ) GCDlen--;
02540         while ( LCMbuffer[LCMlen-1] == 0 ) LCMlen--;
02541         t = tnext;
02542         while ( *t ) {
02543             tnext = t + *t; length = ABS(tnext[-1]);
02544             tstop = tnext - length; redlength = (length-1)/2;
02545             len1 = len2 = redlength;
02546             den = tstop + redlength;
02547             while ( tstop[len1-1] == 0 ) len1--;
02548             while ( den[len2-1] == 0 ) len2--;
02549             if ( GCDlen == 1 && GCDbuffer[0] == 1 ) {}
02550             else {
02551                 GcdLong(BHEAD (UWORD *)tstop, len1, GCDbuffer, GCDlen, GCDbuffer2, &GCDlen2);
02552                 ap = GCDbuffer; GCDbuffer = GCDbuffer2; GCDbuffer2 = ap;
02553                 a = GCDlen; GCDlen = GCDlen2; GCDlen2 = a;
02554             }
02555             if ( len2 == 1 && den[0] == 1 ) {}
02556             else {
02557                 GcdLong(BHEAD LCMbuffer, LCMlen, (UWORD *)den, len2, LCMbuffer2, &LCMlen2);
02558                 DivLong((UWORD *)den, len2, LCMbuffer2, LCMlen2,
02559                     GCDbuffer2, &GCDlen2, (UWORD *)AT.WorkPointer, &a);
02560                 MullLong(LCMbuffer, LCMlen, GCDbuffer2, GCDlen2, LCMbuffer2, &LCMlen2);
02561                 ap = LCMbuffer; LCMbuffer = LCMbuffer2; LCMbuffer2 = ap;
02562                 a = LCMlen; LCMlen = LCMlen2; LCMlen2 = a;
02563             }
02564             t = tnext;
02565         }
02566         if ( GCDlen != 1 || GCDbuffer[0] != 1 || LCMlen != 1 || LCMbuffer[0] != 1 ) {
02567             redlength = GCDlen; if ( LCMlen > GCDlen ) redlength = LCMlen;
02568             for ( i = 0; i < GCDlen; i++ ) *tout++ = (WORD) (GCDbuffer[i]);
02569             for ( ; i < redlength; i++ ) *tout++ = 0;
02570             for ( i = 0; i < LCMlen; i++ ) *tout++ = (WORD) (LCMbuffer[i]);
02571             for ( ; i < redlength; i++ ) *tout++ = 0;
02572             *tout++ = (2*redlength+1)*sign;
02573             for ( i = 0; i < LCMlen; i++ ) *tt++ = (WORD) (LCMbuffer[i]);
02574             for ( ; i < redlength; i++ ) *tt++ = 0;
02575             for ( i = 0; i < GCDlen; i++ ) *tt++ = (WORD) (GCDbuffer[i]);
02576             for ( ; i < redlength; i++ ) *tt++ = 0;
02577             *tt++ = (2*redlength+1)*sign;
02578             action++;
02579         }
02580         else {
02581             *tout++ = 1; *tout++ = 1; *tout++ = 3*sign;
02582             *tt++ = 1; *tt++ = 1; *tt++ = 3*sign;
02583             if ( sign != 1 ) action++;
02584         }
02585         NumberFree(LCMbuffer2, "MakeInteger");
02586         NumberFree(LCMbuffer, "MakeInteger");
02587         NumberFree(GCDbuffer2, "MakeInteger");
02588         NumberFree(GCDbuffer, "MakeInteger");
02589     }
02590 /*
02591     #[ Coefficient :
02592     #[ Multiply by the inverse content :
02593 */
02594     if ( action ) {

```

```

02595     *term = tout - term; *tout = 0;
02596     *tterm = tt - tterm; *tt = 0;
02597     AT.WorkPointer = tt;
02598     inp = MultiplyWithTerm(BHEAD in,tterm,2);
02599     AT.WorkPointer = tterm;
02600     t = inp; while ( *t ) t += *t;
02601     j = (t-inp); t = inp;
02602     if ( j*sizeof(WORD) > (size_t)(AM.MaxTer) ) goto OverWork;
02603     in = tout = TermMalloc("TakeSymbolContent");
02604     NCOPY(tout,t,j); *tout = 0;
02605     if ( AN.tryterm > 0 ) { TermFree(inp,"MultiplyWithTerm"); AN.tryterm = 0; }
02606     else { M_free(inp,"MultiplyWithTerm"); }
02607 }
02608 else {
02609     t = in; while ( *t ) t += *t;
02610     j = (t-in); t = in;
02611     if ( j*sizeof(WORD) > (size_t)(AM.MaxTer) ) goto OverWork;
02612     in = tout = TermMalloc("TakeSymbolContent");
02613     NCOPY(tout,t,j); *tout = 0;
02614     term[0] = 4; term[1] = 1; term[2] = 1; term[3] = 3; term[4] = 0;
02615 }
02616 /*
02617 #] Multiply by the inverse content :
02618 AT.WorkPointer = tterm + *tterm;
02619 */
02620 AT.WorkPointer = oldworkpointer;
02621
02622 return(in);
02623 OverWork:
02624 MLOCK(ErrorMessageLock);
02625 MesPrint("Term too complex. Maybe increasing MaxTermSize can help");
02626 MUNLOCK(ErrorMessageLock);
02627 CalledFrom:
02628 MLOCK(ErrorMessageLock);
02629 MesCall("TakeSymbolContent");
02630 MUNLOCK(ErrorMessageLock);
02631 Terminate(-1);
02632 return(0);
02633 }
02634
02635 /*
02636 #] TakeSymbolContent :
02637 #[ GCDclean :
02638
02639     Takes a numerator and a denominator that each consist of a
02640     single term with only a coefficient and symbols and makes them
02641     into a proper fraction. Output overwrites input.
02642 */
02643
02644 void GCDclean(PHEAD WORD *num, WORD *den)
02645 {
02646     WORD *out1 = TermMalloc("GCDclean");
02647     WORD *out2 = TermMalloc("GCDclean");
02648     WORD *t1, *t2, *r1, *r2, *t1stop, *t2stop, csizel, csize2, csize3, pow, sign;
02649     int i;
02650     t1stop = num+*num; sign = ( t1stop[-1] < 0 ) ? -1 : 1;
02651     csizel = ABS(t1stop[-1]); t1stop -= csizel;
02652     t2stop = den+*den; if ( t2stop[-1] < 0 ) sign = -sign;
02653     csize2 = ABS(t2stop[-1]); t2stop -= csize2;
02654     t1 = num+1; t2 = den+1;
02655     r1 = out1+3; r2 = out2+3;
02656     if ( t1 == t1stop ) {
02657         if ( t2 < t2stop ) {
02658             for ( i = 2; i < t2[1]; i += 2 ) {
02659                 if ( t2[i+1] < 0 ) { *r1++ = t2[i]; *r1++ = -t2[i+1]; }
02660                 else { *r2++ = t2[i]; *r2++ = t2[i+1]; }
02661             }
02662         }
02663     }
02664     else if ( t2 == t2stop ) {
02665         for ( i = 2; i < t1[1]; i += 2 ) {
02666             if ( t1[i+1] < 0 ) { *r2++ = t1[i]; *r2++ = -t1[i+1]; }
02667             else { *r1++ = t1[i]; *r1++ = t1[i+1]; }
02668         }
02669     }
02670     else {
02671         t1 += 2; t2 += 2;
02672         while ( t1 < t1stop && t2 < t2stop ) {
02673             if ( *t1 < *t2 ) {
02674                 if ( t1[1] > 0 ) { *r1++ = *t1; *r1++ = t1[1]; t1 += 2; }
02675                 else if ( t1[1] < 0 ) { *r2++ = *t1; *r2++ = -t1[1]; t1 += 2; }
02676             }
02677             else if ( *t1 > *t2 ) {
02678                 if ( t2[1] > 0 ) { *r2++ = *t2; *r2++ = t2[1]; t2 += 2; }
02679                 else if ( t2[1] < 0 ) { *r1++ = *t2; *r1++ = -t2[1]; t2 += 2; }
02680             }
02681             else {

```

```

02682         pow = t1[1]-t2[1];
02683         if ( pow > 0 ) { *r1++ = *t1; *r1++ = pow; }
02684         else if ( pow < 0 ) { *r2++ = *t1; *r2++ = -pow; }
02685         t1 += 2; t2 += 2;
02686     }
02687 }
02688 while ( t1 < t1stop ) {
02689     if ( t1[1] < 0 ) { *r2++ = *t1; *r2++ = -t1[1]; }
02690     else { *r1++ = *t1; *r1++ = t1[1]; }
02691     t1 += 2;
02692 }
02693 while ( t2 < t2stop ) {
02694     if ( t2[1] < 0 ) { *r1++ = *t2; *r1++ = -t2[1]; }
02695     else { *r2++ = *t2; *r2++ = t2[1]; }
02696     t2 += 2;
02697 }
02698 }
02699 if ( r1 > out1+3 ) { out1[1] = SYMBOL; out1[2] = r1 - out1 - 1; }
02700 else r1 = out1+1;
02701 if ( r2 > out2+3 ) { out2[1] = SYMBOL; out2[2] = r2 - out2 - 1; }
02702 else r2 = out2+1;
02703 /*
02704     Now the coefficients.
02705 */
02706 csize1 = REDLENG(csize1);
02707 csize2 = REDLENG(csize2);
02708 if ( DivRat(BHEAD (UWORD *)t1stop,csize1,(UWORD *)t2stop,csize2,(UWORD *)r1,&csize3) ) {
02709     MLOCK(ErrorMessageLock);
02710     MesCall("GCDclean");
02711     MUNLOCK(ErrorMessageLock);
02712     Terminate(-1);
02713 }
02714 UnPack((UWORD *)r1,csize3,&csize2,&csize1);
02715 t2 = r1+ABS(csize3);
02716 for ( i = 0; i < csize2; i++ ) r2[i] = t2[i];
02717 r2 += csize2; *r2++ = 1;
02718 for ( i = 1; i < csize2; i++ ) *r2++ = 0;
02719 csize2 = INCLENG(csize2); *r2++ = csize2; *out2 = r2-out2;
02720 r1 += ABS(csize1); *r1++ = 1;
02721 for ( i = 1; i < ABS(csize1); i++ ) *r1++ = 0;
02722 csize1 = INCLENG(csize1); *r1++ = csize1; *out1 = r1-out1;
02723
02724 t1 = num; t2 = out1; i = *out1; NCOPY(t1,t2,i); *t1 = 0;
02725 if ( sign < 0 ) t1[-1] = -t1[-1];
02726 t1 = den; t2 = out2; i = *out2; NCOPY(t1,t2,i); *t1 = 0;
02727
02728 TermFree(out2,"GCDclean");
02729 TermFree(out1,"GCDclean");
02730 }
02731
02732 /*
02733     #] GCDclean :
02734     #[ PolyDiv :
02735
02736     Special stub function for polynomials that should fit inside a term.
02737     We make sure that the space is allocated by TermMalloc.
02738     This makes things much easier on the calling routines.
02739 */
02740
02741 WORD *PolyDiv(PHEAD WORD *a,WORD *b,char *text)
02742 {
02743     /*
02744         Probably the following would work now
02745     */
02746     DUMMYUSE(text);
02747     return(poly_div(BHEAD a,b,1));
02748     /*
02749         WORD *quo, *qq;
02750         WORD *x, *xx;
02751         LONG i;
02752         quo = poly_div(BHEAD a,b,1);
02753         x = TermMalloc(text);
02754         qq = quo; while ( *qq ) qq += *qq;
02755         i = (qq-quo+1);
02756         if ( i*sizeof(WORD) > (size_t)(AM.MaxTer) ) {
02757             DUMMYUSE(text);
02758             MLOCK(ErrorMessageLock);
02759             MesPrint("PolyDiv: Term too complex. Maybe increasing MaxTermSize can help");
02760             MUNLOCK(ErrorMessageLock);
02761             Terminate(-1);
02762         }
02763         xx = x; qq = quo;
02764         NCOPY(xx,qq,i)
02765         TermFree(quo,"poly_div");
02766         return(xx);
02767     */
02768 }

```



```

02769
02770 /*
02771     #] PolyDiv :
02772     #] GCDfunction :
02773     #] DIVfunction :
02774
02775     Input: a div_ function that has two arguments inside a term.
02776     Action: Calculates [arg1/arg2] using polynomial techniques if needed.
02777     Output: The output result is combined with the remainder of the term
02778     and sent to Generator for further processing.
02779     Note that the output can be just a number or many terms.
02780     In case par == 0 the output is [arg1/arg2]
02781     In case par == 1 the output is [arg1%arg2]
02782     In case par == 2 the output is [inverse of arg1 modulus arg2]
02783     In case par == 3 the output is [arg1*arg2]
02784 */
02785
02786 WORD divrem[4] = { DIVFUNCTION, REMFUNCTION, INVERSEFUNCTION, MULFUNCTION };
02787
02788 int DIVfunction(PHEAD WORD *term,WORD level,int par)
02789 {
02790     GETBIDENTITY
02791     WORD *t, *tt, *r, *arg1 = 0, *arg2 = 0, *arg3 = 0, *termout;
02792     WORD *tstop, *tend, *r3, *rr, *rstop, tlength, rlength, newlength;
02793     WORD *proper1, *proper2, *proper3 = 0, numdol = -1;
02794     int numargs = 0, type1, type2, actionflag1, actionflag2;
02795     WORD startebuf = cbuf[AT.ebufnum].numrhs;
02796     int division = ( par <= 2 ); /* false for mul_ */
02797     if ( par < 0 || par > 3 ) {
02798         MLOCK(ErrorMessageLock);
02799         MesPrint("Internal error. Illegal parameter %d in DIVfunction.",par);
02800         MUNLOCK(ErrorMessageLock);
02801         Terminate(-1);
02802     }
02803     /*
02804     Find the function
02805     */
02806     tend = term + *term; tstop = tend - ABS(tend[-1]);
02807     t = term+1;
02808     while ( t < tstop ) {
02809         if ( *t != divrem[par] ) { t += t[1]; continue; }
02810         r = t + FUNHEAD;
02811         tt = t + t[1]; numargs = 0;
02812         while ( r < tt ) {
02813             if ( numargs == 0 ) { arg1 = r; }
02814             if ( numargs == 1 ) { arg2 = r; }
02815             if ( numargs == 2 && *r == -DOLLAREXPRESSION ) { numdol = r[1]; }
02816             numargs++;
02817             NEXTARG(r);
02818         }
02819         if ( numargs == 2 ) break;
02820         if ( division && numargs == 3 ) break;
02821         t = tt;
02822     }
02823     if ( t >= tstop ) {
02824         MLOCK(ErrorMessageLock);
02825         MesPrint("Internal error. Indicated div_ or rem_ function not encountered.");
02826         MUNLOCK(ErrorMessageLock);
02827         Terminate(-1);
02828     }
02829     /*
02830     We have two arguments in arg1 and arg2.
02831     */
02832     if ( division && *arg1 == -SNUMBER && arg1[1] == 0 ) {
02833         if ( *arg2 == -SNUMBER && arg2[1] == 0 ) {
02834             zerozero:;
02835             MLOCK(ErrorMessageLock);
02836             MesPrint("0/0 in either div_ or rem_ function.");
02837             MUNLOCK(ErrorMessageLock);
02838             Terminate(-1);
02839         }
02840         if ( numdol >= 0 ) PutTermInDollar(0,numdol);
02841         return(0);
02842     }
02843     if ( division && *arg2 == -SNUMBER && arg2[1] == 0 ) {
02844         divzero:;
02845         MLOCK(ErrorMessageLock);
02846         MesPrint("Division by zero in either div_ or rem_ function.");
02847         MUNLOCK(ErrorMessageLock);
02848         Terminate(-1);
02849     }
02850     if ( !division ) {
02851         if ( (*arg1 == -SNUMBER && arg1[1] == 0) ||
02852             (*arg2 == -SNUMBER && arg2[1] == 0) ) {
02853             return(0);
02854         }
02855     }

```

```

02856     if ( ( arg1 = ConvertArgument(BHEAD arg1, &type1) ) == 0 ) goto CalledFrom;
02857     if ( ( arg2 = ConvertArgument(BHEAD arg2, &type2) ) == 0 ) goto CalledFrom;
02858     if ( division && *arg1 == 0 ) {
02859         if ( *arg2 == 0 ) {
02860             M_free(arg2,"DIVfunction");
02861             M_free(arg1,"DIVfunction");
02862             goto zerozero;
02863         }
02864         M_free(arg2,"DIVfunction");
02865         M_free(arg1,"DIVfunction");
02866         if ( numdol >= 0 ) PutTermInDollar(0,numdol);
02867         return(0);
02868     }
02869     if ( division && *arg2 == 0 ) {
02870         M_free(arg2,"DIVfunction");
02871         M_free(arg1,"DIVfunction");
02872         goto divzero;
02873     }
02874     if ( !division && (*arg1 == 0 || *arg2 == 0) ) {
02875         M_free(arg2,"DIVfunction");
02876         M_free(arg1,"DIVfunction");
02877         return(0);
02878     }
02879     if ( ( proper1 = PutExtraSymbols(BHEAD arg1,startebuf,&actionflag1) ) == 0 ) goto CalledFrom;
02880     if ( ( proper2 = PutExtraSymbols(BHEAD arg2,startebuf,&actionflag2) ) == 0 ) goto CalledFrom;
02881     /*
02882     if ( type2 == 0 ) M_free(arg2,"DIVfunction");
02883     else {
02884         DOLLARS d = ((DOLLARS)arg2)-1;
02885         if ( d->factors ) M_free(d->factors,"Dollar factors");
02886         M_free(d,"Copy of dollar variable");
02887     }
02888     */
02889     M_free(arg2,"DIVfunction");
02890     /*
02891     if ( type1 == 0 ) M_free(arg1,"DIVfunction");
02892     else {
02893         DOLLARS d = ((DOLLARS)arg1)-1;
02894         if ( d->factors ) M_free(d->factors,"Dollar factors");
02895         M_free(d,"Copy of dollar variable");
02896     }
02897     */
02898     M_free(arg1,"DIVfunction");
02899     if ( par == 0 ) proper3 = poly_div(BHEAD proper1, proper2,0);
02900     else if ( par == 1 ) proper3 = poly_rem(BHEAD proper1, proper2,0);
02901     else if ( par == 2 ) proper3 = poly_inverse(BHEAD proper1, proper2);
02902     else if ( par == 3 ) proper3 = poly_mul(BHEAD proper1, proper2);
02903     if ( proper3 == 0 ) goto CalledFrom;
02904     if ( actionflag1 || actionflag2 ) {
02905         if ( ( arg3 = TakeExtraSymbols(BHEAD proper3,startebuf) ) == 0 ) goto CalledFrom;
02906         M_free(proper3,"DIVfunction");
02907     }
02908     else {
02909         arg3 = proper3;
02910     }
02911     M_free(proper2,"DIVfunction");
02912     M_free(proper1,"DIVfunction");
02913     cbuf[AT.ebufnum].numrhs = startebuf;
02914     if ( *arg3 ) {
02915         termout = AT.WorkPointer;
02916         tlength = tend[-1];
02917         tlength = REDLENG(tlength);
02918         r3 = arg3;
02919         while ( *r3 ) {
02920             tt = term + 1; rr = termout + 1;
02921             while ( tt < t ) *rr++ = *tt++;
02922             r = r3 + 1;
02923             r3 = r3 + *r3;
02924             rstop = r3 - ABS(r3[-1]);
02925             while ( r < rstop ) *rr++ = *r++;
02926             tt += t[1];
02927             while ( tt < tstop ) *rr++ = *ttt++;
02928             rlength = r3[-1];
02929             rlength = REDLENG(rlength);
02930             if ( MulRat(BHEAD (UWORD *)tstop,tlength,(UWORD *)rstop,rlength,
02931                 (UWORD *)rr,&newlength) < 0 ) goto CalledFrom;
02932             rlength = INCLENG(newlength);
02933             rr += ABS(rlength);
02934             rr[-1] = rlength;
02935             *termout = rr - termout;
02936             AT.WorkPointer = rr;
02937             if ( Generator(BHEAD termout,level) ) goto CalledFrom;
02938         }
02939         AT.WorkPointer = termout;
02940     }
02941     M_free(arg3,"DIVfunction");
02942     return(0);

```

```

02943 CalledFrom:
02944     MLOCK(ErrorMessageLock);
02945     MesCall("DIVfunction");
02946     MUNLOCK(ErrorMessageLock);
02947     SETERROR(-1)
02948 }
02949
02950 /*
02951 #] DIVfunction :
02952 #[ MULfunc :
02953
02954     Multiplies two polynomials and puts the results in TermMalloc space.
02955 */
02956
02957 WORD *MULfunc(PHEAD WORD *p1, WORD *p2)
02958 {
02959     WORD *prod, size1, size2, size3, *t, *tfill, *ps1, *ps2, sign1, sign2, error, *p3;
02960     UWORD *num1, *num2, *num3;
02961     int i;
02962     WORD oldsorttype = AR.SortType;
02963     COMPARE oldcompareroutine = (COMPARE) (AR.CompareRoutine);
02964     AR.SortType = SORTHIGHFIRST;
02965     AR.CompareRoutine = (COMPAREDUMMY) (&CompareSymbols);
02966     num3 = NumberMalloc("MULfunc");
02967     prod = TermMalloc("MULfunc");
02968     NewSort(BHEAD0);
02969     while ( *p1 ) {
02970         ps1 = p1+*p1; num1 = (UWORD *) (ps1 - ABS(ps1[-1])); size1 = ps1[-1];
02971         if ( size1 < 0 ) { sign1 = -1; size1 = -size1; }
02972         else sign1 = 1;
02973         size1 = (size1-1)/2;
02974         p3 = p2;
02975         while ( *p3 ) {
02976             ps2 = p3+*p3; num2 = (UWORD *) (ps2 - ABS(ps2[-1])); size2 = ps2[-1];
02977             if ( size2 < 0 ) { sign2 = -1; size2 = -size2; }
02978             else sign2 = 1;
02979             size2 = (size2-1)/2;
02980             if ( MulLong(num1, size1, num2, size2, num3, &size3) ) {
02981                 error = 1;
02982                 CalledFrom:
02983                     MLOCK(ErrorMessageLock);
02984                     MesPrint(" Error %d", error);
02985                     MesCall("MulFunc");
02986                     MUNLOCK(ErrorMessageLock);
02987                     Terminate(-1);
02988             }
02989             tfill = prod+1;
02990             t = p1+1; while ( t < (WORD *) num1 ) *tfill++ = *t++;
02991             t = p3+1; while ( t < (WORD *) num2 ) *tfill++ = *t++;
02992             t = (WORD *) num3;
02993             for ( i = 0; i < size3; i++ ) *tfill++ = *t++;
02994             *tfill++ = 1;
02995             for ( i = 1; i < size3; i++ ) *tfill++ = 0;
02996             *tfill++ = (2*size3+1)*sign1*sign2;
02997             prod[0] = tfill - prod;
02998             if ( SymbolNormalize(prod) ) { error = 2; goto CalledFrom; }
02999             if ( StoreTerm(BHEAD prod) ) { error = 3; goto CalledFrom; }
03000             p3 += *p3;
03001         }
03002         p1 += *p1;
03003     }
03004     NumberFree(num3, "MULfunc");
03005     EndSort(BHEAD prod, 1);
03006     AR.CompareRoutine = (COMPAREDUMMY) oldcompareroutine;
03007     AR.SortType = oldsorttype;
03008     return(prod);
03009 }
03010
03011 /*
03012 #] MULfunc :
03013 #[ ConvertArgument :
03014
03015     Converts an argument to a general notation in allocated space.
03016 */
03017
03018 WORD *ConvertArgument(PHEAD WORD *arg, int *type)
03019 {
03020     WORD *output, *t, *r;
03021     int i, size;
03022     if ( *arg > 0 ) {
03023         output = (WORD *) Malloc1((*arg)*sizeof(WORD), "ConvertArgument");
03024         i = *arg - ARGHEAD; t = arg + ARGHEAD; r = output;
03025         NCOPY(r, t, i);
03026         *r = 0; *type = 0;
03027         return(output);
03028     }
03029     if ( *arg == -EXPRESSION ) {

```

```

03030         *type = 0;
03031         return(CreateExpression(BHEAD arg[1]));
03032     }
03033     if ( *arg == -DOLLAREXPRESSION ) {
03034         DOLLARS d;
03035         *type = 1;
03036         d = DolToTerms(BHEAD arg[1]);
03037     /*
03038         The problem is that DolToTerms creates a copy of the dollar variable.
03039         If we just return d->where we create a memory leak. Hence we have to
03040         copy the contents of d->where to a new buffer
03041     */
03042         output = (WORD *)Malloc1((d->size+1)*sizeof(WORD),"Copy of dollar content");
03043         WCOPY(output,d->where,d->size+1);
03044         if ( d->factors ) { M_free(d->factors,"Dollar factors"); d->factors = 0; }
03045         M_free(d,"Copy of dollar variable");
03046         return(output);
03047     }
03048     #if ( FUNHEAD > 4 )
03049         size = FUNHEAD+5;
03050     #else
03051         size = 9;
03052     #endif
03053     output = (WORD *)Malloc1(size*sizeof(WORD),"ConvertArgument");
03054     switch(*arg) {
03055         case -SYMBOL:
03056             output[0] = 8; output[1] = SYMBOL; output[2] = 4; output[3] = arg[1];
03057             output[4] = 1; output[5] = 1; output[6] = 1; output[7] = 3;
03058             output[8] = 0;
03059             break;
03060         case -INDEX:
03061         case -VECTOR:
03062         case -MINVECTOR:
03063             output[0] = 7; output[1] = INDEX; output[2] = 3; output[3] = arg[1];
03064             output[4] = 1; output[5] = 1;
03065             if ( *arg == -MINVECTOR ) output[6] = -3;
03066             else output[6] = 3;
03067             output[7] = 0;
03068             break;
03069         case -SNUMBER:
03070             output[0] = 4;
03071             if ( arg[1] < 0 ) {
03072                 output[1] = -arg[1]; output[2] = 1; output[3] = -3;
03073             }
03074             else {
03075                 output[1] = arg[1]; output[2] = 1; output[3] = 3;
03076             }
03077             output[4] = 0;
03078             break;
03079         default:
03080             output[0] = FUNHEAD+4;
03081             output[1] = -*arg;
03082             output[2] = FUNHEAD;
03083             for ( i = 3; i <= FUNHEAD; i++ ) output[i] = 0;
03084             output[FUNHEAD+1] = 1;
03085             output[FUNHEAD+2] = 1;
03086             output[FUNHEAD+3] = 3;
03087             output[FUNHEAD+4] = 0;
03088             break;
03089     }
03090     *type = 0;
03091     return(output);
03092 }
03093
03094 /*
03095 #] ConvertArgument :
03096 #[ ExpandRat :
03097
03098 Expands the denominator of a PolyRatFun in the variable PolyFunVar.
03099 The output is a polyratfun with a single argument.
03100 In the case that there is a polyratfun with more than one argument
03101 or the dirtyflag is on, the argument(s) is/are normalized.
03102 The output overwrites the input.
03103 */
03104
03105 char *TheErrorMessage[] = {
03106     "PolyRatFun not of a type that FORM will expand: incorrect variable inside."
03107     ,"Division by zero in PolyRatFun encountered in ExpandRat."
03108     ,"Irregular code in PolyRatFun encountered in ExpandRat."
03109     ,"Called from ExpandRat."
03110     ,"Workspace overflow. Change parameter Workspace in setup file?"
03111 };
03112
03113 int ExpandRat(PHEAD WORD *fun)
03114 {
03115     WORD *r, *rr, *rrr, *tt, *tnext, *arg1, *arg2, *rmin = 0, *rmininv;
03116     WORD *rcoef, rsize, rcopy, *ow = AT.WorkPointer;

```

```

03117     WORD *numerator, *denominator, *rnext;
03118     WORD *thecopy, *rc, ncoef, newcoef, *m, *mm, nco, *outarg = 0;
03119     UWORD co[2], co1[2], co2[2];
03120     WORD OldPolyFunPow = AR.PolyFunPow;
03121     int i, j, minpow = 0, eppow, first, error = 0, ipoly;
03122     if ( fun[1] == FUNHEAD ) { return(0); }
03123     tnext = fun + fun[1];
03124     if ( fun[1] == fun[FUNHEAD]+FUNHEAD ) { /* Single argument */
03125         if ( fun[2] == 0 ) { goto done; }
03126     /*
03127         We have to normalize the argument. This could make it shorter.
03128     */
03129     NormArg;;
03130         if ( outarg == 0 ) outarg = TermMalloc("ExpandRat")+ARGHEAD;
03131         AT.TrimPower = 1;
03132         NewSort(BHEAD0);
03133         r = fun+FUNHEAD+ARGHEAD;
03134         if ( AR.PolyFunExp == 2 ) { /* Find minimum power */
03135             WORD minpow2 = MAXPOWER, *rrm;
03136             rrm = r;
03137             while ( rrm < tnext ) {
03138                 if ( *rrm == 4 ) {
03139                     if ( minpow2 > 0 ) minpow2 = 0;
03140                 }
03141                 else if ( ABS(rrm[*rrm-1]) == (*rrm-1) ) {
03142                     if ( minpow2 > 0 ) minpow2 = 0;
03143                 }
03144                 else {
03145                     if ( rrm[1] == SYMBOL && rrm[2] == 4 && rrm[3] == AR.PolyFunVar ) {
03146                         if ( rrm[4] < minpow2 ) minpow2 = rrm[4];
03147                     }
03148                     else {
03149                         MesPrint("Illegal term in expanded polyratfun.");
03150                         goto onerror;
03151                     }
03152                 }
03153                 rrm += *rrm;
03154             }
03155             AR.PolyFunPow += minpow2;
03156         }
03157         while ( r < tnext ) {
03158             rr = r + *r;
03159             i = *r; rrr = outarg; NCOPY(rrr,r,i);
03160             Normalize(BHEAD outarg);
03161             if ( *outarg > 0 ) StoreTerm(BHEAD outarg);
03162         }
03163         r = fun+FUNHEAD+ARGHEAD;
03164         EndSort(BHEAD r,1);
03165         AT.TrimPower = 0;
03166         if ( *r == 0 ) {
03167             fun[FUNHEAD] = -SNUMBER; fun[FUNHEAD+1] = 0;
03168             fun[1] = FUNHEAD+2;
03169         }
03170         else {
03171             rr = fun+FUNHEAD;
03172             if ( ToFast(rr,rr) ) {
03173                 NEXTARG(rr); fun[1] = rr - fun;
03174             }
03175             else {
03176                 while ( *r ) r += *r;
03177                 *rr = r-rr; rr[1] = CLEANFLAG;
03178                 fun[1] = r - fun;
03179             }
03180         }
03181         fun[2] = CLEANFLAG;
03182         goto done;
03183     }
03184     /*
03185     First test whether we have only AR.PolyFunVar in the denominator
03186     */
03187     tt = fun + FUNHEAD;
03188     arg1 = arg2 = 0;
03189     if ( tt < tnext ) {
03190         arg1 = tt; NEXTARG(tt);
03191         if ( tt < tnext ) {
03192             arg2 = tt; NEXTARG(tt);
03193             if ( tt != tnext ) { arg1 = arg2 = 0; } /* more than two arguments */
03194         }
03195     }
03196     if ( arg2 == 0 ) {
03197         if ( *arg1 < 0 ) { fun[2] = CLEANFLAG; goto done; }
03198         if ( fun[2] == CLEANFLAG ) goto done;
03199         goto NormArg; /* Note: should not come here */
03200     }
03201     /*
03202     Produce the output argument in outarg
03203     */

```

```

03204     if ( outarg == 0 ) outarg = TermMalloc("ExpandRat")+ARGHEAD;
03205
03206     if ( *arg2 <= 0 ) {
03207     /*
03208         These cases are trivial.
03209         We try as much as possible to write the output directly into the
03210         function. We just have to be extremely careful not to overwrite
03211         relevant information before we are finished with it.
03212     */
03213     if ( *arg2 == -SYMBOL && arg2[1] == AR.PolyFunVar ) {
03214         rr = r = fun+FUNHEAD+ARGHEAD;
03215         if ( *arg1 < 0 ) {
03216             if ( *arg1 == -SYMBOL ) {
03217                 if ( arg1[1] == AR.PolyFunVar ) {
03218                     *r++ = 4; *r++ = 1; *r++ = 1; *r++ = 3; *r = 0;
03219                 }
03220             } else {
03221                 *r++ = 10; *r++ = SYMBOL; *r++ = 6;
03222                 *r++ = arg1[1]; *r++ = 1;
03223                 *r++ = AR.PolyFunVar; *r++ = -1;
03224                 *r++ = 1; *r++ = 1; *r++ = 3; *r = 0;
03225                 Normalize(BHEAD rr);
03226             }
03227         }
03228         else if ( *arg1 == -SNUMBER ) {
03229             nco = arg1[1];
03230             if ( nco == 0 ) { *r++ = 0; }
03231             else {
03232                 *r++ = 8; *r++ = SYMBOL; *r++ = 4;
03233                 *r++ = AR.PolyFunVar; *r++ = -1;
03234                 *r++ = ABS(nco); *r++ = 1;
03235                 if ( nco < 0 ) *r++ = -3;
03236                 else *r++ = 3;
03237                 *r = 0;
03238             }
03239         }
03240         else { error = 2; goto onerror; } /* should not happen! */
03241     }
03242     else { /* Multi-term numerator. */
03243         m = arg1+ARGHEAD;
03244         NewSort(BHEAD0); /* Technically maybe not needed */
03245         if ( AR.PolyFunExp == 2 ) { /* Find minimum power */
03246             WORD minpow2 = MAXPOWER, *rrm;
03247             rrm = m;
03248             while ( rrm < arg2 ) {
03249                 if ( *rrm == 4 ) {
03250                     if ( minpow2 > 0 ) minpow2 = 0;
03251                 }
03252                 else if ( ABS(rrm[*rrm-1]) == (*rrm-1) ) {
03253                     if ( minpow2 > 0 ) minpow2 = 0;
03254                 }
03255                 else {
03256                     if ( rrm[1] == SYMBOL && rrm[2] == 4 && rrm[3] == AR.PolyFunVar ) {
03257                         if ( rrm[4] < minpow2 ) minpow2 = rrm[4];
03258                     }
03259                     else {
03260                         MesPrint("Illegal term in expanded polyratfun.");
03261                         goto onerror;
03262                     }
03263                 }
03264                 rrm += *rrm;
03265             }
03266             AR.PolyFunPow += minpow2-1;
03267         }
03268         while ( m < arg2 ) {
03269             r = outarg;
03270             rrr = r++; mm = m + *m;
03271             *r++ = SYMBOL; *r++ = 4; *r++ = AR.PolyFunVar; *r++ = -1;
03272             m++; while ( m < mm ) *r++ = *m++;
03273             *rrr = r-rrr;
03274             Normalize(BHEAD rrr);
03275             StoreTerm(BHEAD rrr);
03276         }
03277         EndSort(BHEAD rr,1);
03278         r = rr; while ( *r ) r += *r;
03279     }
03280     if ( *rr == 0 ) {
03281         fun[FUNHEAD] = -SNUMBER; fun[FUNHEAD+1] = CLEANFLAG;
03282         fun[1] = FUNHEAD+2;
03283     }
03284     else {
03285         rr = fun+FUNHEAD;
03286         *rr = r-rr;
03287         rr[1] = CLEANFLAG;
03288         if ( ToFast(rr,rr) ) {
03289             NEXTARG(rr);
03290             fun[1] = rr - fun;

```

```

03291         }
03292         else { fun[1] = r - fun; }
03293     }
03294     fun[2] = CLEANFLAG;
03295     goto done;
03296 }
03297 else if ( *arg2 == -SNUMBER ) {
03298     rr = r = outarg;
03299     if ( arg2[1] == 0 ) { error = 1; goto onerror; }
03300     if ( *arg1 == -SNUMBER ) { /* Things may not be normalized */
03301         if ( arg1[1] == 0 ) { *r++ = 0; }
03302         else {
03303             col[0] = ABS(arg1[1]); col[1] = 1;
03304             co2[0] = 1; co2[1] = ABS(arg2[1]);
03305             MulRat(BHEAD col,1,co2,1,co,&nco);
03306             *r++ = 4; *r++ = (WORD)(co[0]); *r++ = (WORD)(co[1]);
03307             if ( ( arg1[1] < 0 && arg2[1] > 0 ) ||
03308                 ( arg1[1] > 0 && arg2[1] < 0 ) ) *r++ = -3;
03309             else *r++ = 3;
03310             *r = 0;
03311         }
03312     }
03313     else if ( *arg1 == -SYMBOL ) {
03314         *r++ = 8; *r++ = SYMBOL; *r++ = 4;
03315         *r++ = arg1[1]; *r++ = 1;
03316         *r++ = 1; *r++ = ABS(arg2[1]);
03317         if ( arg2[1] < 0 ) *r++ = -3;
03318         else *r++ = 3;
03319         *r = 0;
03320     }
03321     else if ( *arg1 < 0 ) { error = 2; goto onerror; }
03322     else { /* Multi-term numerator. */
03323         m = arg1+ARGHEAD;
03324         NewSort(BHEAD0); /* Technically maybe not needed */
03325         if ( AR.PolyFunExp == 2 ) { /* Find minimum power */
03326             WORD minpow2 = MAXPOWER, *rrm;
03327             rrm = m;
03328             while ( rrm < arg2 ) {
03329                 if ( *rrm == 4 ) {
03330                     if ( minpow2 > 0 ) minpow2 = 0;
03331                 }
03332                 else if ( ABS(rrm[*rrm-1]) == (*rrm-1) ) {
03333                     if ( minpow2 > 0 ) minpow2 = 0;
03334                 }
03335                 else {
03336                     if ( rrm[1] == SYMBOL && rrm[2] == 4 && rrm[3] == AR.PolyFunVar ) {
03337                         if ( rrm[4] < minpow2 ) minpow2 = rrm[4];
03338                     }
03339                     else {
03340                         MesPrint("Illegal term in expanded polyratfun.");
03341                         goto onerror;
03342                     }
03343                 }
03344                 rrm += *rrm;
03345             }
03346             AR.PolyFunPow += minpow2;
03347         }
03348         while ( m < arg2 ) {
03349             r = rr;
03350             rrr = r++; mm = m + *m;
03351             *r++ = DENOMINATOR; *r++ = FUNHEAD + 2; *r++ = DIRTYFLAG;
03352             FILLFUN3(r);
03353             *r++ = arg2[0]; *r++ = arg2[1];
03354             m++; while ( m < mm ) *r++ = *m++;
03355             *rrr = r-rrr;
03356             if ( r < AT.WorkTop && r >= AT.WorkSpace )
03357                 AT.WorkPointer = r;
03358             Normalize(BHEAD rrr);
03359             if ( ABS(rrr[*rrr-1]) == *rrr-1 ) {
03360                 if ( AR.PolyFunPow >= 0 ) {
03361                     StoreTerm(BHEAD rrr);
03362                 }
03363             }
03364             else if ( rrr[1] == SYMBOL && rrr[2] == 4 &&
03365                 rrr[3] == AR.PolyFunVar && rrr[4] <= AR.PolyFunPow ) {
03366                 StoreTerm(BHEAD rrr);
03367             }
03368         }
03369         EndSort(BHEAD rr,1);
03370     }
03371     r = rr; while ( *r ) r += *r;
03372     i = r-rr;
03373     r = fun + FUNHEAD + ARGHEAD;
03374     NCOPY(r,rr,i);
03375     rr = fun + FUNHEAD;
03376     *rr = r - rr; rr[1] = CLEANFLAG;
03377     if ( ToFast(rr,rr) ) {

```

```

03378         NEXTARG(rr);
03379         fun[1] = rr - fun;
03380     }
03381     else { fun[1] = r - fun; }
03382     fun[2] = CLEANFLAG;
03383     goto done;
03384 }
03385 else { error = 0; goto onerror; }
03386 }
03387 else {
03388     r = arg2+ARGHEAD; /* The argument ends at tnext */
03389     first = 1;
03390     while ( r < tnext ) {
03391         rr = r + *r; rr -= ABS(rr[-1]);
03392         if ( r+1 == rr ) {
03393             if ( first ) { minpow = 0; first = 0; rmin = r; }
03394             else if ( minpow > 0 ) { minpow = 0; rmin = r; }
03395         }
03396         else if ( r[1] != SYMBOL || r[2] != 4 || r[3] != AR.PolyFunVar
03397             || r[4] > MAXPOWER ) { error = 0; goto onerror; }
03398         else if ( first ) { minpow = r[4]; first = 0; rmin = r; }
03399         else if ( r[4] < minpow ) { minpow = r[4]; rmin = r; }
03400         r += *r;
03401     }
03402     /*
03403     We have now:
03404     1: a numerator in arg1 which can contain several variables.
03405     2: a denominator in arg2 with at most only AR.PolyFunVar (ep).
03406     3: the minimum power in the denominator is minpow and the
03407        term with that minimum power is in rmin.
03408     Divide numerator and denominator by this minimum power.
03409     Determine the power range in the numerator.
03410     Call InvPoly.
03411     Multiply by the inverse in such a way that we never take more
03412     powers of ep than necessary.
03413     */
03414     /*
03415     One: put 1/rmin in AT.WorkPointer -> rmininv
03416     */
03417     AT.WorkPointer += AM.MaxTer/sizeof(WORD);
03418     if ( AT.WorkPointer + (AM.MaxTer/sizeof(WORD)) >= AT.WorkTop ) {
03419         error = 4; goto onerror;
03420     }
03421     rmininv = r = AT.WorkPointer;
03422     rr = rmin; i = *rmin; NCOPY(r,rr,i)
03423     if ( minpow != 0 ) { rmininv[4] = -rmininv[4]; }
03424     rsize = ABS(r[-1]);
03425     rcoef = r - rsize;
03426     rsize = (rsize-1)/2; rr = rcoef + rsize;
03427     for ( i = 0; i < rsize; i++ ) {
03428         rcopy = rcoef[i]; rcoef[i] = rr[i]; rr[i] = rcopy;
03429     }
03430     AT.WorkPointer = r;
03431     if ( *arg1 < 0 ) {
03432         ToGeneral(arg1,r,0);
03433         arg1 = r; r += *r; *r++ = 0; rcopy = 0;
03434         AT.WorkPointer = r;
03435     }
03436     else {
03437         r = arg1 + *arg1;
03438         rcopy = *r; *r++ = 0;
03439     }
03440     /*
03441     We can use MultiplyWithTerm.
03442     */
03443     AT.LeaveNegative = 1;
03444     numerator = MultiplyWithTerm(BHEAD arg1+ARGHEAD,rmininv,0);
03445     AT.LeaveNegative = 0;
03446     r[-1] = rcopy;
03447     r = numerator; while ( *r ) r += *r;
03448     AT.WorkPointer = r+1;
03449     rcopy = arg2[*arg2]; arg2[*arg2] = 0;
03450     denominator = MultiplyWithTerm(BHEAD arg2+ARGHEAD,rmininv,1);
03451     arg2[*arg2] = rcopy;
03452     r = denominator; while ( *r ) r += *r;
03453     AT.WorkPointer = r+1;
03454     /*
03455     Now find the minimum power of ep in the numerator.
03456     */
03457     r = numerator;
03458     first = 1;
03459     while ( *r ) {
03460         rr = r + *r; rr -= ABS(rr[-1]);
03461         if ( r+1 == rr ) {
03462             if ( first ) { minpow = 0; first = 0; }
03463             else if ( minpow > 0 ) { minpow = 0; }
03464         }

```



```

03465         else if ( r[1] != SYMBOL ) { error = 0; goto onerror; }
03466     else {
03467         for ( i = 3; i < r[2]; i += 2 ) {
03468             if ( r[i] == AR.PolyFunVar ) {
03469                 if ( first ) { minpow = r[i+1]; first = 0; }
03470                 else if ( r[i+1] < minpow ) minpow = r[i+1];
03471                 break;
03472             }
03473         }
03474         if ( i >= r[2] ) {
03475             if ( first ) { minpow = 0; first = 0; }
03476             else if ( minpow > 0 ) minpow = 0;
03477         }
03478     }
03479     r += *r;
03480 }
03481 /*
03482     We can invert the denominator.
03483     Note that the return value is an offset in AT.pWorkSpace.
03484     Hence there is no need to free memory afterwards.
03485 */
03486     if ( AR.PolyFunExp == 3 ) {
03487         ipoly = InvPoly(BHEAD denominator, AR.PolyFunPow-minpow, AR.PolyFunVar);
03488     }
03489     else {
03490         ipoly = InvPoly(BHEAD denominator, AR.PolyFunPow, AR.PolyFunVar);
03491     }
03492 /*
03493     Now we start the multiplying
03494 */
03495     NewSort(BHEAD0);
03496     r = numerator;
03497     while ( *r ) {
03498 /*
03499         1: Find power of ep.
03500 */
03501         rnext = r + *r;
03502         rrr = rnext - ABS(rnext[-1]);
03503         rr = r+1;
03504         eppow = 0;
03505         if ( rr < rrr ) {
03506             j = rr[1] - 2; rr += 2;
03507             while ( j > 0 ) {
03508                 if ( *rr == AR.PolyFunVar ) { eppow = rr[1]; break; }
03509                 j -= 2; rr += 2;
03510             }
03511         }
03512 /*
03513         2: Multiply by the proper terms in ipoly
03514 */
03515         for ( i = 0; i <= AR.PolyFunPow-eppow+minpow; i++ ) {
03516             if ( AT.pWorkSpace[ipoly+i] == 0 ) continue;
03517 /*
03518             Copy the term, add i to the power of ep and multiply coef.
03519 */
03520             rc = r;
03521             rr = thecopy = AT.WorkPointer;
03522             while ( rc < rrr ) *rr++ = *rc++;
03523             if ( i != 0 ) {
03524                 *rr++ = SYMBOL; *rr++ = 4; *rr++ = AR.PolyFunVar; *rr++ = i;
03525             }
03526             ncoef = REDLENG(rnext[-1]);
03527             MulRat(BHEAD (UWORD *)rrr, ncoef,
03528                 (UWORD *) (AT.pWorkSpace[ipoly+i]+1), AT.pWorkSpace[ipoly+i][0],
03529                 (UWORD *)rr, &newcoef);
03530             ncoef = ABS(newcoef); rr += 2*ncoef;
03531             newcoef = INCLENG(newcoef);
03532             *rr++ = newcoef;
03533             *thecopy = rr - thecopy;
03534             AT.WorkPointer = rr;
03535             Normalize(BHEAD thecopy);
03536             if ( *thecopy > 0 ) StoreTerm(BHEAD thecopy);
03537             AT.WorkPointer = thecopy;
03538         }
03539         r = rnext;
03540     }
03541 /*
03542     Now we have all.
03543 */
03544     rr = fun + FUNHEAD; r = rr + ARGHEAD;
03545     EndSort(BHEAD r, 1);
03546     if ( *r == 0 ) {
03547         fun[1] = FUNHEAD+2; fun[2] = CLEANFLAG;
03548         fun[FUNHEAD] = -SNUMBER; fun[FUNHEAD+1] = 0;
03549     }
03550     else {
03551         while ( *r ) r += *r;

```

```

03552         rr[0] = r-rr; rr[1] = CLEANFLAG;
03553         if ( ToFast(rr,rr) ) { NEXTARG(rr); fun[1] = rr-fun; }
03554         else { fun[1] = r-fun; }
03555         fun[2] = CLEANFLAG;
03556     }
03557 }
03558 done:
03559     if ( outarg ) TermFree(outarg-ARGHEAD,"ExpandRat");
03560     AR.PolyFunPow = OldPolyFunPow;
03561     AT.WorkPointer = ow;
03562     AN.PolyNormFlag = 1;
03563     return(0);
03564 onerror:
03565     if ( outarg ) TermFree(outarg-ARGHEAD,"ExpandRat");
03566     AR.PolyFunPow = OldPolyFunPow;
03567     AT.WorkPointer = ow;
03568     MLOCK(ErrorMessageLock);
03569     MesPrint(TheErrorMessage[error]);
03570     MUNLOCK(ErrorMessageLock);
03571     Terminate(-1);
03572     return(-1);
03573 }
03574
03575 /*
03576 #] ExpandRat :
03577 #[ InvPoly :
03578
03579 The input polynomial is represented as a sequence of terms in ascending
03580 power. The first coefficient is 1. If we call this 1-a and
03581  $a = \sum_{j=1,n} x^j a(j)$ , and  $b = 1/(1-a)$  we can find the coefficients
03582 of b with the recursion
03583  $b(0) = 1, b(n) = \sum_{j=1,n} a(j) * b(n-j)$ 
03584 The variable is the symbol sym and we need maxpow powers in the answer.
03585 The answer is an array of pointers to the coefficients of the various
03586 powers as rational numbers in the notation signedsize,numerator,denominator
03587 We put these powers in the workspace and the answer is in AT.pWorkspace.
03588 Hence the return value is an offset in the pWorkspace.
03589 A zero pointer indicates that this coefficient is zero.
03590 */
03591
03592 int InvPoly(PHEAD WORD *inpoly, WORD maxpow, WORD sym)
03593 {
03594     int needed, inpointers, outpointers, maxinput = 0, i, j;
03595     WORD *t, *tt, *ttt, *w, *c, *cc, *ccc, lenc, lenc1, lenc2, rc, *c1, *c2;
03596     /*
03597     Step 0: allocate the space
03598     */
03599     needed = (maxpow+1)*2;
03600     WantAddPointers(needed);
03601     inpointers = AT.pWorkPointer;
03602     outpointers = AT.pWorkPointer+maxpow+1;
03603     for ( i = 0; i < needed; i++ ) AT.pWorkspace[inpointers+i] = 0;
03604     /*
03605     Step 1: determine the coefficients in inpoly
03606     often there is a maximum power that is much smaller than maxpow.
03607     keeping track of this can speed up things.
03608     */
03609     t = inpoly;
03610     w = AT.WorkPointer;
03611     while ( *t ) {
03612         if ( *t == 4 ) {
03613             if ( t[1] != 1 || t[2] != 1 || t[3] != 3 ) goto onerror;
03614             AT.pWorkspace[inpointers] = 0;
03615         }
03616         else if ( t[1] != SYMBOL || t[2] != 4 || t[3] != sym || t[4] < 0 ) goto onerror;
03617         else if ( t[4] > maxpow ) {} /* power outside useful range */
03618         else {
03619             if ( t[4] > maxinput ) maxinput = t[4];
03620             AT.pWorkspace[inpointers+t[4]] = w;
03621             tt = t + *t; rc = *--tt; /* we need - the coefficient! */
03622             rc = REDLENG(rc); *w++ = rc;
03623             ttt = t+5;
03624             while ( ttt < tt ) *w++ = *ttt++;
03625         }
03626         t += *t;
03627     }
03628     /*
03629     Step 2: compute the output. b(0) = 1.
03630     then the recursion starts.
03631     */
03632     AT.pWorkspace[outpointers] = w;
03633     *w++ = 1; *w++ = 1; *w++ = 1;
03634     c = TermMalloc("InvPoly");
03635     c1 = TermMalloc("InvPoly");
03636     c2 = TermMalloc("InvPoly");
03637     for ( j = 1; j <= maxpow; j++ ) {
03638     /*

```

```

03639         Start at c = a(j)*b(0) = a(j)
03640     */
03641     if ( ( cc = AT.pWorkspace[inpointers+j] ) != 0 ) {
03642         lenc = *cc++; /* reduced length */
03643         i = 2*ABS(lenc); ccc = c;
03644         NCOPY(ccc,cc,i);
03645     }
03646     else { lenc = 0; }
03647     for ( i = Min(j-1,maxinput); i > 0; i-- ) {
03648     /*
03649         c -> c + a(i)*b(j-i)
03650     */
03651         if ( AT.pWorkspace[inpointers+i] == 0
03652             || AT.pWorkspace[outpointers+j-i] == 0 ) {
03653         }
03654         else {
03655             if ( MulRat(BHEAD (UWORD
*) (AT.pWorkspace[inpointers+i]+1),AT.pWorkspace[inpointers+i][0],
03656                 (UWORD *) (AT.pWorkspace[outpointers+j-i]+1),AT.pWorkspace[outpointers+j-i][0],
03657                 (UWORD *)c1,&lenc1) ) goto calcerror;
03658             if ( lenc == 0 ) {
03659                 cc = c; c = c1; c1 = cc;
03660                 lenc = lenc1;
03661             }
03662             else {
03663                 if ( AddRat(BHEAD (UWORD *)c,lenc, (UWORD *)c1,lenc1, (UWORD *)c2,&lenc2) )
03664                     goto calcerror;
03665                 cc = c; c = c2; c2 = cc;
03666                 lenc = lenc2;
03667             }
03668         }
03669     }
03670     /*
03671     Copy c to the proper location
03672     */
03673     if ( lenc == 0 ) AT.pWorkspace[outpointers+j] = 0;
03674     else {
03675         AT.pWorkspace[outpointers+j] = w;
03676         *w++ = lenc;
03677         i = 2*ABS(lenc); ccc = c;
03678         NCOPY(w,ccc,i);
03679     }
03680 }
03681 AT.WorkPointer = w;
03682 TermFree(c2,"InvPoly");
03683 TermFree(c1,"InvPoly");
03684 TermFree(c,"InvPoly");
03685
03686 return(outpointers);
03687 onerror:
03688     MLOCK(ErrorMessageLock);
03689     MesPrint("Incorrect symbol field in InvPoly.");
03690     MUNLOCK(ErrorMessageLock);
03691     Terminate(-1);
03692     return(-1);
03693 calcerror:
03694     MLOCK(ErrorMessageLock);
03695     MesPrint("Called from InvPoly.");
03696     MUNLOCK(ErrorMessageLock);
03697     Terminate(-1);
03698     return(-1);
03699 }
03700
03701 /*
03702 #] InvPoly :
03703 */

```


4.121 reken.c File Reference

```

#include "form3.h"
#include <math.h>

```

Include dependency graph for reken.c:

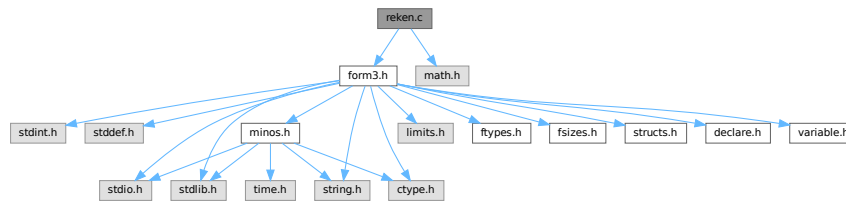

Macros

- `#define GCDMAX 3`
- `#define NEWTRICK 1`
- `#define COPYLONG(x1, nx1, x2, nx2) { int i; for(i=0;i<ABS(nx2);i++)x1[i]=x2[i];nx1=nx2; }`
- `#define WARMUP 6`

Functions

- void `Pack` (UWORD *a, WORD *na, UWORD *b, WORD nb)
- void `UnPack` (UWORD *a, WORD na, WORD *denom, WORD *numer)
- int `Mully` (PHEAD UWORD *a, WORD *na, UWORD *b, WORD nb)
- int `Divvy` (PHEAD UWORD *a, WORD *na, UWORD *b, WORD nb)
- int `AddRat` (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int `MulRat` (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int `DivRat` (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int `Simplify` (PHEAD UWORD *a, WORD *na, UWORD *b, WORD *nb)
- int `AccumGCD` (PHEAD UWORD *a, WORD *na, UWORD *b, WORD nb)
- int `TakeRatRoot` (UWORD *a, WORD *n, WORD power)
- int `AddLong` (UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int `AddPLon` (UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- void `SubPLon` (UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int `MulLong` (UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int `BigLong` (UWORD *a, WORD na, UWORD *b, WORD nb)
- int `DivLong` (UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc, UWORD *d, WORD *nd)
- int `RaisPow` (PHEAD UWORD *a, WORD *na, UWORD b)
- void `RaisPowCached` (PHEAD WORD x, WORD n, UWORD **c, WORD *nc)
- WORD `RaisPowMod` (WORD x, WORD n, WORD m)
- int `NormalModulus` (UWORD *a, WORD *na)
- int `MakeInverses` (void)
- int `GetModInverses` (WORD m1, WORD m2, WORD *im1, WORD *im2)
- int `GetLongModInverses` (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *ia, WORD *nia, UWORD *ib, WORD *nib)
- int `Product` (UWORD *a, WORD *na, WORD b)
- UWORD `Quotient` (UWORD *a, WORD *na, WORD b)
- WORD `Remain10` (UWORD *a, WORD *na)
- WORD `Remain4` (UWORD *a, WORD *na)
- void `PrtLong` (UWORD *a, WORD na, UBYTE *s)
- int `GetLong` (UBYTE *s, UWORD *a, WORD *na)
- int `GcdLong` (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)

- int [GetBinom](#) (UWORD *a, WORD *na, WORD i1, WORD i2)
- int [LcmLong](#) (PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
- int [TakeLongRoot](#) (UWORD *a, WORD *n, WORD power)
- int [MakeRational](#) (WORD a, WORD m, WORD *b, WORD *c)
- int [MakeLongRational](#) (PHEAD UWORD *a, WORD na, UWORD *m, WORD nm, UWORD *b, WORD *nb)
- WORD [CompCoef](#) (WORD *term1, WORD *term2)
- int [Modulus](#) (WORD *term)
- int [TakeModulus](#) (UWORD *a, WORD *na, UWORD *cmodvec, WORD ncm, WORD par)
- int [TakeNormalModulus](#) (UWORD *a, WORD *na, UWORD *c, WORD nc, WORD par)
- int [MakeModTable](#) (void)
- int [Factorial](#) (PHEAD WORD n, UWORD *a, WORD *na)
- int [Bernoulli](#) (WORD n, UWORD *a, WORD *na)
- WORD [NextPrime](#) (PHEAD WORD num)
- WORD [Moebius](#) (PHEAD WORD nn)
- void [iniwranf](#) (PHEAD0)
- UWORD [wranf](#) (PHEAD0)
- UWORD [iranf](#) (PHEAD UWORD imax)
- UBYTE * [PreRandom](#) (UBYTE *s)

4.121.1 Detailed Description

This file contains the numerical routines. The arithmetic in FORM is normally over the rational numbers. Hence there are routines for dealing with integers and with rational of 'arbitrary precision' (within limits) There are also routines for that calculus modulus an integer. In addition there are the routines for factorials and Bernoulli numbers. The random number function is currently only for internal purposes.

Definition in file [reken.c](#).

4.121.2 Macro Definition Documentation

4.121.2.1 GCDMAX

```
#define GCDMAX 3
```

Definition at line 49 of file [reken.c](#).

4.121.2.2 NEWTRICK

```
#define NEWTRICK 1
```

Definition at line 51 of file [reken.c](#).

4.121.2.3 COPYLONG

```
#define COPYLONG(
    x1,
    nx1,
    x2,
    nx2 ) { int i; for(i=0;i<ABS(nx2);i++) x1[i]=x2[i];nx1=nx2; }
```

Definition at line 2902 of file [reken.c](#).

4.121.2.4 WARMUP

```
#define WARMUP 6
```

Definition at line [3802](#) of file [reken.c](#).

4.121.3 Function Documentation

4.121.3.1 Pack()

```
void Pack (
    UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb )
```

Definition at line [62](#) of file [reken.c](#).

4.121.3.2 UnPack()

```
void UnPack (
    UWORD * a,
    WORD na,
    WORD * denom,
    WORD * numer )
```

Definition at line [100](#) of file [reken.c](#).

4.121.3.3 Mully()

```
int Mully (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb )
```

Definition at line [126](#) of file [reken.c](#).

4.121.3.4 Divvy()

```
int Divvy (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb )
```

Definition at line [172](#) of file [reken.c](#).

4.121.3.5 AddRat()

```
int AddRat (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 210 of file [reken.c](#).

4.121.3.6 MulRat()

```
int MulRat (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 378 of file [reken.c](#).

4.121.3.7 DivRat()

```
int DivRat (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 500 of file [reken.c](#).

4.121.3.8 Simplify()

```
int Simplify (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD * nb )
```

Definition at line 531 of file [reken.c](#).

4.121.3.9 AccumGCD()

```
int AccumGCD (
    PHEAD UWORD * a,
    WORD * na,
    UWORD * b,
    WORD nb )
```

Definition at line 648 of file [reken.c](#).

4.121.3.10 TakeRatRoot()

```
int TakeRatRoot (
    UWORD * a,
    WORD * n,
    WORD power )
```

Definition at line 681 of file [reken.c](#).

4.121.3.11 AddLong()

```
int AddLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 706 of file [reken.c](#).

4.121.3.12 AddPLon()

```
int AddPLon (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 751 of file [reken.c](#).

4.121.3.13 SubPLon()

```
void SubPLon (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 804 of file [reken.c](#).

4.121.3.14 MulLong()

```
int MulLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line 842 of file [reken.c](#).

4.121.3.15 BigLong()

```
int BigLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb )
```

Definition at line 945 of file [reken.c](#).

4.121.3.16 DivLong()

```
int DivLong (
    UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc,
    UWORD * d,
    WORD * nd )
```

Definition at line 973 of file [reken.c](#).

4.121.3.17 RaisPow()

```
int RaisPow (
    PHEAD UWORD * a,
    WORD * na,
    UWORD b )
```

Definition at line 1229 of file [reken.c](#).

4.121.3.18 RaisPowCached()

```
void RaisPowCached (
    PHEAD WORD x,
    WORD n,
    UWORD ** c,
    WORD * nc )
```

Computes power x^n and caches the value

4.121.4 Description

Calculates the power x^n and stores the results for caching purposes. The pointer c (i.e., the pointer, and not what it points to) is overwritten. What it points to should not be overwritten in the calling function.

4.121.5 Notes

- Caching is done in `AT.small_power[]`. This array is extended if necessary.

Definition at line 1297 of file [reken.c](#).

Referenced by [poly::divmod_heap\(\)](#), [poly::divmod_univar\(\)](#), and [poly::mul_heap\(\)](#).

4.121.5.1 RaisPowMod()

```
WORD RaisPowMod (
    WORD x,
    WORD n,
    WORD m )
```

Definition at line 1384 of file [reken.c](#).

4.121.5.2 NormalModulus()

```
int NormalModulus (
    UWORD * a,
    WORD * na )
```

Brings a modular representation in the range $-p/2$ to $+p/2$ The return value tells whether anything was done. Routine made in the general modulus revamp of July 2008 (JV).

Definition at line 1404 of file [reken.c](#).

Referenced by [AddCoef\(\)](#), and [MergePatches\(\)](#).

4.121.5.3 MakeInverses()

```
int MakeInverses (
    void )
```

Makes a table of inverses in modular calculus The modulus is in `AC.cmod` and `AC.ncmod` One should notice that the table of inverses can only be made if the modulus fits inside a single FORM word. Otherwise the table lookup becomes too difficult and the table too long.

Definition at line 1441 of file [reken.c](#).

References [GetModInverses\(\)](#).

Here is the call graph for this function:



4.121.5.4 GetModInverses()

```
int GetModInverses (
    WORD m1,
    WORD m2,
    WORD * im1,
    WORD * im2 )
```

Input m1 and m2, which are relative prime. determines $a*m1+b*m2 = 1$ (and 1 is the gcd of m1 and m2) then $a*m1 = 1 \bmod m2$ and hence $im1 = a$. and $b*m2 = 1 \bmod m1$ and hence $im2 = b$. Set $m1 = 0*m1+1*m2 = a1*m1+b1*m2$
 $m2 = 1*m1+0*m2 = a2*m1+b2*m2$ If everything is OK, the return value is zero

Definition at line 1477 of file [reken.c](#).

Referenced by [poly::divmod_heap\(\)](#), [poly::divmod_univar\(\)](#), [MakeDollarMod\(\)](#), [MakeInverses\(\)](#), [MakeMod\(\)](#), [TakeContent\(\)](#), and [TakeSymbolContent\(\)](#).

4.121.5.5 GetLongModInverses()

```
int GetLongModInverses (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * ia,
    WORD * nia,
    UWORD * ib,
    WORD * nib )
```

Definition at line 1509 of file [reken.c](#).

4.121.5.6 Product()

```
int Product (
    UWORD * a,
    WORD * na,
    WORD b )
```

Definition at line 1586 of file [reken.c](#).

4.121.5.7 Quotient()

```
UWORD Quotient (
    UWORD * a,
    WORD * na,
    WORD b )
```

Definition at line 1621 of file [reken.c](#).

4.121.5.8 Remain10()

```
WORD Remain10 (
    UWORD * a,
    WORD * na )
```

Definition at line 1660 of file [reken.c](#).

4.121.5.9 Remain4()

```
WORD Remain4 (
    UWORD * a,
    WORD * na )
```

Definition at line 1687 of file [reken.c](#).

4.121.5.10 PrtLong()

```
void PrtLong (
    UWORD * a,
    WORD na,
    UBYTE * s )
```

Definition at line 1713 of file [reken.c](#).

4.121.5.11 GetLong()

```
int GetLong (
    UBYTE * s,
    UWORD * a,
    WORD * na )
```

Definition at line 1775 of file [reken.c](#).

4.121.5.12 GcdLong()

```
int GcdLong (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD nc )
```

Definition at line 2277 of file [reken.c](#).

4.121.5.13 GetBinom()

```
int GetBinom (
    UWORD * a,
    WORD * na,
    WORD i1,
    WORD i2 )
```

Definition at line [2668](#) of file [reken.c](#).

4.121.5.14 LcmLong()

```
int LcmLong (
    PHEAD UWORD * a,
    WORD na,
    UWORD * b,
    WORD nb,
    UWORD * c,
    WORD * nc )
```

Definition at line [2702](#) of file [reken.c](#).

4.121.5.15 TakeLongRoot()

```
int TakeLongRoot (
    UWORD * a,
    WORD * n,
    WORD power )
```

Definition at line [2736](#) of file [reken.c](#).

4.121.5.16 MakeRational()

```
int MakeRational (
    WORD a,
    WORD m,
    WORD * b,
    WORD * c )
```

Definition at line [2856](#) of file [reken.c](#).

4.121.5.17 MakeLongRational()

```
int MakeLongRational (
    PHEAD UWORD * a,
    WORD na,
    UWORD * m,
    WORD nm,
    UWORD * b,
    WORD * nb )
```

Definition at line [2904](#) of file [reken.c](#).

4.121.5.18 CompCoef()

```
WORD CompCoef (
    WORD * term1,
    WORD * term2 )
```

Routine takes $a_1 \bmod m_1$ and $a_2 \bmod m_2$ and returns $a \bmod m_1*m_2$ with
 $a \bmod m_1 = a_1$ and $a \bmod m_2 = a_2$

Chinese remainder: $a \bmod (m_1*m_2) = q_1*m_1 + a_1$ $a \bmod (m_1*m_2) = q_2*m_2 + a_2$ Compute n_1 such that $(n_1*m_1) \bmod m_2$ is one
 Compute n_2 such that $(n_2*m_2) \bmod m_1$ is one Then $(a_1*n_2*m_2 + a_2*n_1*m_1) \bmod (m_1*m_2)$ is $a \bmod (m_1*m_2)$

Definition at line 3048 of file [reken.c](#).

Referenced by [Compare1\(\)](#).

4.121.5.19 Modulus()

```
int Modulus (
    WORD * term )
```

Definition at line 3103 of file [reken.c](#).

4.121.5.20 TakeModulus()

```
int TakeModulus (
    UWORD * a,
    WORD * na,
    UWORD * cmodvec,
    WORD ncmod,
    WORD par )
```

Definition at line 3150 of file [reken.c](#).

4.121.5.21 TakeNormalModulus()

```
int TakeNormalModulus (
    UWORD * a,
    WORD * na,
    UWORD * c,
    WORD nc,
    WORD par )
```

Definition at line 3322 of file [reken.c](#).

4.121.5.22 MakeModTable()

```
int MakeModTable (
    void )
```

Definition at line 3364 of file [reken.c](#).

4.121.5.23 Factorial()

```
int Factorial (
    PHEAD WORD n,
    UWORD * a,
    WORD * na )
```

Definition at line 3450 of file [reken.c](#).

4.121.5.24 Bernoulli()

```
int Bernoulli (
    WORD n,
    UWORD * a,
    WORD * na )
```

Definition at line 3530 of file [reken.c](#).

4.121.5.25 NextPrime()

```
WORD NextPrime (
    PHEAD WORD num )
```

Gives the next prime number in the list of prime numbers.

If the list isn't long enough we expand it. For ease in ParForm and because these lists shouldn't be very big we let each worker keep its own list.

The list is cut off at MAXPOWER, because we don't want to get into trouble that the power of a variable gets larger than the prime number.

Definition at line 3665 of file [reken.c](#).

4.121.5.26 Moebius()

```
WORD Moebius (
    PHEAD WORD nn )
```

Definition at line 3729 of file [reken.c](#).

4.121.5.27 iniwranf()

```
void iniwranf (
    PHEAD0 )
```

Definition at line 3820 of file [reken.c](#).

4.121.5.28 wranf()

```
UWORD wranf (
    PHEAD0 )
```

Definition at line [3869](#) of file [reken.c](#).

4.121.5.29 iranf()

```
UWORD iranf (
    PHEAD UWORD imax )
```

Definition at line [3888](#) of file [reken.c](#).

4.121.5.30 PreRandom()

```
UBYTE * PreRandom (
    UBYTE * s )
```

Definition at line [3913](#) of file [reken.c](#).

4.122 reken.c

[Go to the documentation of this file.](#)

```
00001
00011 /* #[] License : */
00012 /*
00013 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00014 *   When using this file you are requested to refer to the publication
00015 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00016 *   This is considered a matter of courtesy as the development was paid
00017 *   for by FOM the Dutch physics granting agency and we would like to
00018 *   be able to track its scientific use to convince FOM of its value
00019 *   for the community.
00020 *
00021 *   This file is part of FORM.
00022 *
00023 *   FORM is free software: you can redistribute it and/or modify it under the
00024 *   terms of the GNU General Public License as published by the Free Software
00025 *   Foundation, either version 3 of the License, or (at your option) any later
00026 *   version.
00027 *
00028 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00029 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00030 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00031 *   details.
00032 *
00033 *   You should have received a copy of the GNU General Public License along
00034 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00035 */
00036 /* #[] License : */
00037 /*
00038 *   #[] Includes : reken.c
00039 */
00040
00041 #include "form3.h"
00042 #include <math.h>
00043
00044 #ifdef WITHGMP
00045 #include <gmp.h>
00046 #define GMPSPREAD (GMP_LIMB_BITS/BITSINWORD)
00047 #endif
00048
00049 #define GCDMAX 3
00050
00051 #define NEWTRICK 1
```



```

00052 /*
00053  #] Includes :
00054  #[ RekenRational :
00055      #[ Pack :          void Pack(a,na,b,nb)
00056
00057      Packs the contents of the numerator a and the denominator b into
00058      one normalized fraction a.
00059  */
00060
00061 void Pack(UWORD *a, WORD *na, UWORD *b, WORD nb)
00062 {
00063     WORD c, sgn = 1, i;
00064     UWORD *to,*from;
00065     if ( (c = *na) == 0 ) {
00066         MLOCK(ErrorMessageLock);
00067         MesPrint("Caught a zero in Pack");
00068         MUNLOCK(ErrorMessageLock);
00069         return;
00070     }
00071     if ( nb == 0 ) {
00072         MLOCK(ErrorMessageLock);
00073         MesPrint("Division by zero in Pack");
00074         MUNLOCK(ErrorMessageLock);
00075         return;
00076     }
00077     if ( *na < 0 ) { sgn = -sgn; c = -c; }
00078     if ( nb < 0 ) { sgn = -sgn; nb = -nb; }
00079     *na = MaX(c,nb);
00080     to = a + c;
00081     i = *na - c;
00082     while ( --i >= 0 ) *to++ = 0;
00083     i = *na - nb;
00084     from = b;
00085     NCOPY(to,from,nb);
00086     while ( --i >= 0 ) *to++ = 0;
00087     if ( sgn < 0 ) *na = -*na;
00088 }
00089
00090
00091 /*
00092     #] Pack :
00093     #[ UnPack :          void UnPack(a,na,denom,number)
00094
00095     Determines the sizes of the numerator and the denominator in the
00096     normalized fraction a with length na.
00097  */
00098
00099 void UnPack(UWORD *a, WORD na, WORD *denom, WORD *number)
00100 {
00101     UWORD *pos;
00102     WORD i, sgn = na;
00103     if ( na < 0 ) { na = -na; }
00104     i = na;
00105     if ( i > 1 ) {          /* Find the respective leading words */
00106         a += i;
00107         a--;
00108         pos = a + i;
00109         while ( !(*a) ) { i--; a--; }
00110         while ( !(*pos) ) { na--; pos--; }
00111     }
00112     *denom = na;
00113     if ( sgn < 0 ) i = -i;
00114     *number = i;
00115 }
00116
00117
00118 /*
00119     #] UnPack :
00120     #[ Mully :          WORD Mully(a,na,b,nb)
00121
00122     Multiplies the rational a by the Long b.
00123  */
00124
00125 int Mully(PHEAD UWORD *a, WORD *na, UWORD *b, WORD nb)
00126 {
00127     GETBIDENTITY
00128     UWORD *d, *e;
00129     WORD i, sgn = 1;
00130     WORD nd, ne, adenom, anumer;
00131     if ( !nb ) { *na = 0; return(0); }
00132     else if ( *b == 1 ) {
00133         if ( nb == 1 ) return(0);
00134         else if ( nb == -1 ) { *na = -*na; return(0); }
00135     }
00136     if ( *na < 0 ) { sgn = -sgn; *na = -*na; }
00137     if ( nb < 0 ) { sgn = -sgn; nb = -nb; }

```

```

00139     UnPack(a,*na,&adenom,&anumer);
00140     d = NumberMalloc("Mully"); e = NumberMalloc("Mully");
00141     for ( i = 0; i < nb; i++ ) { e[i] = *b++; }
00142     ne = nb;
00143     if ( Simplify(BHEAD a+*na,&adenom,e,&ne) ) goto MullyEr;
00144     if ( Mullong(a,anumer,e,ne,d,&nd) ) goto MullyEr;
00145     b = a+*na;
00146     for ( i = 0; i < *na; i++ ) { e[i] = *b++; }
00147     ne = adenom;
00148     *na = nd;
00149     b = d;
00150     *na = nd;
00151     for ( i = 0; i < *na; i++ ) { a[i] = *b++; }
00152     Pack(a,na,e,ne);
00153     if ( sgn < 0 ) *na = -*na;
00154     NumberFree(d,"Mully"); NumberFree(e,"Mully");
00155     return(0);
00156 MullyEr:
00157     MLOCK(ErrorMessageLock);
00158     MesCall("Mully");
00159     MUNLOCK(ErrorMessageLock);
00160     NumberFree(d,"Mully"); NumberFree(e,"Mully");
00161     SETERROR(-1)
00162 }
00163
00164 /*
00165     #] Mully :
00166     #[ Divvy :          WORD Divvy(a,na,b,nb)
00167
00168     Divides the rational a by the Long b.
00169 */
00170
00171 int Divvy(PHEAD UWORD *a, WORD *na, UWORD *b, WORD nb)
00172 {
00173     GETBIDENTITY
00174     UWORD *d,*e;
00175     WORD i, sgn = 1;
00176     WORD nd, ne, adenom, anumer;
00177     if ( !nb ) {
00178         MLOCK(ErrorMessageLock);
00179         MesPrint("Division by zero in Divvy");
00180         MUNLOCK(ErrorMessageLock);
00181         return(-1);
00182     }
00183     d = NumberMalloc("Divvy"); e = NumberMalloc("Divvy");
00184     if ( nb < 0 ) { sgn = -sgn; nb = -nb; }
00185     if ( *na < 0 ) { sgn = -sgn; *na = -*na; }
00186     UnPack(a,*na,&adenom,&anumer);
00187     for ( i = 0; i < nb; i++ ) { e[i] = *b++; }
00188     ne = nb;
00189     if ( Simplify(BHEAD a,&anumer,e,&ne) ) goto DivvyEr;
00190     if ( Mullong(a+*na,adenom,e,ne,d,&nd) ) goto DivvyEr;
00191     *na = anumer;
00192     Pack(a,na,d,nd);
00193     if ( sgn < 0 ) *na = -*na;
00194     NumberFree(d,"Divvy"); NumberFree(e,"Divvy");
00195     return(0);
00196 DivvyEr:
00197     MLOCK(ErrorMessageLock);
00198     MesCall("Divvy");
00199     MUNLOCK(ErrorMessageLock);
00200     NumberFree(d,"Divvy"); NumberFree(e,"Divvy");
00201     SETERROR(-1)
00202 }
00203
00204 /*
00205     #] Divvy :
00206     #[ AddRat :          WORD AddRat(a,na,b,nb,c,nc)
00207
00208 */
00209
00210 int AddRat(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00211 {
00212     GETBIDENTITY
00213     UWORD *d, *e, *f, *g;
00214     WORD nd, ne, nf, ng, adenom, anumer, bdenom, bnumer;
00215     if ( !na ) {
00216         WORD i;
00217         *nc = nb;
00218         if ( nb < 0 ) nb = -nb;
00219         nb *= 2;
00220         for ( i = 0; i < nb; i++ ) *c++ = *b++;
00221         return(0);
00222     }
00223     else if ( !nb ) {
00224         WORD i;
00225         *nc = na;

```

```

00226         if ( na < 0 ) na = -na;
00227         na *= 2;
00228         for ( i = 0; i < na; i++ ) *c++ = *a++;
00229         return(0);
00230     }
00231     else if ( b[1] == 1 && a[1] == 1 ) {
00232         if ( na == 1 ) {
00233             if ( nb == 1 ) {
00234                 *c = *a + *b;
00235                 c[1] = 1;
00236                 if ( *c < *a ) { c[2] = 1; c[3] = 0; *nc = 2; }
00237                 else { *nc = 1; }
00238                 return(0);
00239             }
00240             else if ( nb == -1 ) {
00241                 if ( *b > *a ) {
00242                     *c = *b - *a; *nc = -1;
00243                 }
00244                 else if ( *b < *a ) {
00245                     *c = *a - *b; *nc = 1;
00246                 }
00247                 else *nc = 0;
00248                 c[1] = 1;
00249                 return(0);
00250             }
00251         }
00252         else if ( na == -1 ) {
00253             if ( nb == -1 ) {
00254                 c[1] = 1;
00255                 *c = *a + *b;
00256                 if ( *c < *a ) { c[2] = 1; c[3] = 0; *nc = -2; }
00257                 else { *nc = -1; }
00258                 return(0);
00259             }
00260             else if ( nb == 1 ) {
00261                 if ( *b > *a ) {
00262                     *c = *b - *a; *nc = 1;
00263                 }
00264                 else if ( *b < *a ) {
00265                     *c = *a - *b; *nc = -1;
00266                 }
00267                 else *nc = 0;
00268                 c[1] = 1;
00269                 return(0);
00270             }
00271         }
00272     }
00273     UnPack(a,na,&adenom,&anumer);
00274     UnPack(b,nb,&bdenom,&bnumber);
00275     if ( na < 0 ) na = -na;
00276     if ( nb < 0 ) nb = -nb;
00277     if ( na == 1 && nb == 1 ) {
00278         RLONG t1, t2, t3;
00279         t3 = ((RLONG)a[1])*((RLONG)b[1]);
00280         t1 = ((RLONG)a[0])*((RLONG)b[1]);
00281         t2 = ((RLONG)a[1])*((RLONG)b[0]);
00282         if ( ( anumer > 0 && bnumber > 0 ) || ( anumer < 0 && bnumber < 0 ) ) {
00283             if ( ( t1 = t1 + t2 ) < t2 ) {
00284                 c[2] = 1;
00285                 c[0] = (UWORD)t1;
00286                 c[1] = (UWORD)(t1 » BITSINWORD);
00287                 *nc = 3;
00288             }
00289             else {
00290                 c[0] = (UWORD)t1;
00291                 if ( ( c[1] = (UWORD)(t1 » BITSINWORD) ) != 0 ) *nc = 2;
00292                 else *nc = 1;
00293             }
00294         }
00295         else {
00296             if ( t1 == t2 ) { *nc = 0; return(0); }
00297             if ( t1 > t2 ) {
00298                 t1 -= t2;
00299             }
00300             else {
00301                 t1 = t2 - t1;
00302                 anumer = -anumer;
00303             }
00304             c[0] = (UWORD)t1;
00305             if ( ( c[1] = (UWORD)(t1 » BITSINWORD) ) != 0 ) *nc = 2;
00306             else *nc = 1;
00307         }
00308         if ( anumer < 0 ) *nc = -*nc;
00309         d = NumberMalloc("AddRat");
00310         d[0] = (UWORD)t3;
00311         if ( ( d[1] = (UWORD)(t3 » BITSINWORD) ) != 0 ) nd = 2;
00312         else nd = 1;

```

```

00313         if ( Simplify(BHEAD c,nc,d,&nd) ) goto AddRer1;
00314     }
00315 /*
00316     else if ( a[na] == 1 && b[nb] == 1 && adenom == 1 && bdenom == 1 ) {
00317         if ( AddLong(a,na,b,nb,c,&nc) ) goto AddRer2;
00318         i = ABS(nc); d = c + i; *d++ = 1;
00319         while ( --i > 0 ) *d++ = 0 ;
00320         return(0);
00321     }
00322 */
00323     else {
00324         d = NumberMalloc("AddRat"); e = NumberMalloc("AddRat");
00325         f = NumberMalloc("AddRat"); g = NumberMalloc("AddRat");
00326         if ( GcdLong(BHEAD a+na,adenom,b+nb,bdenom,d,&nd) ) goto AddRer;
00327         if ( *d == 1 && nd == 1 ) nd = 0;
00328         if ( nd ) {
00329             if ( DivLong(a+na,adenom,d,nd,e,&ne,c,nc) ) goto AddRer;
00330             if ( DivLong(b+nb,bdenom,d,nd,f,&nf,c,nc) ) goto AddRer;
00331             if ( MulLong(a,anumer,f,nf,c,nc) ) goto AddRer;
00332             if ( MulLong(b,bnumer,e,ne,g,&ng) ) goto AddRer;
00333         }
00334         else {
00335             if ( MulLong(a+na,adenom,b,bnumer,c,nc) ) goto AddRer;
00336             if ( MulLong(b+nb,bdenom,a,anumer,g,&ng) ) goto AddRer;
00337         }
00338         if ( AddLong(c,*nc,g,ng,c,nc) ) goto AddRer;
00339         if ( !*nc ) {
00340             NumberFree(g,"AddRat"); NumberFree(f,"AddRat");
00341             NumberFree(e,"AddRat"); NumberFree(d,"AddRat");
00342             return(0);
00343         }
00344         if ( nd ) {
00345             if ( Simplify(BHEAD c,nc,d,&nd) ) goto AddRer;
00346             if ( MulLong(e,ne,d,nd,g,&ng) ) goto AddRer;
00347             if ( MulLong(g,ng,f,nf,d,&nd) ) goto AddRer;
00348         }
00349         else {
00350             if ( MulLong(a+na,adenom,b+nb,bdenom,d,&nd) ) goto AddRer;
00351         }
00352         NumberFree(g,"AddRat"); NumberFree(f,"AddRat"); NumberFree(e,"AddRat");
00353     }
00354     Pack(c,nc,d,nd);
00355     NumberFree(d,"AddRat");
00356     return(0);
00357 AddRer:
00358     NumberFree(g,"AddRat"); NumberFree(f,"AddRat"); NumberFree(e,"AddRat");
00359 AddRer1:
00360     NumberFree(d,"AddRat");
00361 /* AddRer2: */
00362     MLOCK(ErrorMessageLock);
00363     MesCall("AddRat");
00364     MUNLOCK(ErrorMessageLock);
00365     SETERROR(-1)
00366 }
00367
00368 /*
00369     #] AddRat :
00370     #[ MulRat :          WORD MulRat(a,na,b,nb,c,nc)
00371
00372     Multiplies the rationals a and b. The Gcd of the individual
00373     pieces is divided out first to minimize the chances of spurious
00374     overflows.
00375 */
00376 */
00377
00378 int MulRat(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00379 {
00380     WORD i;
00381     WORD sgn = 1;
00382     if ( *b == 1 && b[1] == 1 ) {
00383         if ( nb == 1 ) {
00384             *nc = na;
00385             i = ABS(na); i *= 2;
00386             while ( --i >= 0 ) *c++ = *a++;
00387             return(0);
00388         }
00389         else if ( nb == -1 ) {
00390             *nc = - na;
00391             i = ABS(na); i *= 2;
00392             while ( --i >= 0 ) *c++ = *a++;
00393             return(0);
00394         }
00395     }
00396     if ( *a == 1 && a[1] == 1 ) {
00397         if ( na == 1 ) {
00398             *nc = nb;
00399             i = ABS(nb); i *= 2;

```

```

00400         while ( --i >= 0 ) *c++ = *b++;
00401         return(0);
00402     }
00403     else if ( na == -1 ) {
00404         *nc = - nb;
00405         i = ABS(nb); i *= 2;
00406         while ( --i >= 0 ) *c++ = *b++;
00407         return(0);
00408     }
00409 }
00410 if ( na < 0 ) { na = -na; sgn = -sgn; }
00411 if ( nb < 0 ) { nb = -nb; sgn = -sgn; }
00412 if ( !na || !nb ) { *nc = 0; return(0); }
00413 if ( na != 1 || nb != 1 ) {
00414     GETBIDENTITY
00415     UWORD *xd,*xe, *xf,*xg;
00416     WORD dden, dnumr, eden, enumr;
00417     UnPack(a,na,&dden,&dnumr);
00418     UnPack(b,nb,&eden,&enumr);
00419     xd = NumberMalloc("MulRat"); xf = NumberMalloc("MulRat");
00420     for ( i = 0; i < dnumr; i++ ) xd[i] = a[i];
00421     a += na;
00422     for ( i = 0; i < dden; i++ ) xf[i] = a[i];
00423     xe = NumberMalloc("MulRat"); xg = NumberMalloc("MulRat");
00424     for ( i = 0; i < enumr; i++ ) xe[i] = b[i];
00425     b += nb;
00426     for ( i = 0; i < eden; i++ ) xg[i] = b[i];
00427     if ( Simplify(BHEAD xd,&dnumr,xg,&eden) ||
00428         Simplify(BHEAD xe,&enumr,xf,&dden) ||
00429         MulLong(xd,dnumr,xe,enumr,c,nc) ||
00430         MulLong(xf,dden,xg,eden,xd,&dnumr) ) {
00431         MLOCK(ErrorMessageLock);
00432         MesCall("MulRat");
00433         MUNLOCK(ErrorMessageLock);
00434         NumberFree(xd,"MulRat"); NumberFree(xe,"MulRat"); NumberFree(xf,"MulRat");
00435         NumberFree(xg,"MulRat");
00436         SETERROR(-1)
00437     }
00438     Pack(c,nc,xd,dnumr);
00439     NumberFree(xd,"MulRat"); NumberFree(xe,"MulRat"); NumberFree(xf,"MulRat");
00440     NumberFree(xg,"MulRat");
00441 }
00442 else {
00443     UWORD y;
00444     UWORD a0,a1,b0,b1;
00445     RLONG xx;
00446     y = a[0]; b1=b[1];
00447     do { a0 = y % b1; y = b1; } while ( ( b1 = a0 ) != 0 );
00448     if ( y != 1 ) {
00449         a0 = a[0] / y;
00450         b1 = b[1] / y;
00451     }
00452     else {
00453         a0 = a[0];
00454         b1 = b[1];
00455     }
00456     y=b[0]; a1=a[1];
00457     do { b0 = y % a1; y = a1; } while ( ( a1 = b0 ) != 0 );
00458     if ( y != 1 ) {
00459         a1 = a[1] / y;
00460         b0 = b[0] / y;
00461     }
00462     else {
00463         a1 = a[1];
00464         b0 = b[0];
00465     }
00466     xx = ((RLONG)a0)*b0;
00467     if ( xx & AWORDMASK ) {
00468         *nc = 2;
00469         c[0] = (UWORD)xx;
00470         c[1] = (UWORD)(xx >> BITSINWORD);
00471         xx = ((RLONG)a1)*b1;
00472         c[2] = (UWORD)xx;
00473         c[3] = (UWORD)(xx >> BITSINWORD);
00474     }
00475     else {
00476         c[0] = (UWORD)xx;
00477         xx = ((RLONG)a1)*b1;
00478         if ( xx & AWORDMASK ) {
00479             c[1] = 0;
00480             c[2] = (UWORD)xx;
00481             c[3] = (UWORD)(xx >> BITSINWORD);
00482             *nc = 2;
00483         }
00484         else {
00485             c[1] = (UWORD)xx;
00486             *nc = 1;
00487         }
00488     }
00489 }

```

```

00485     }
00486     }
00487 }
00488 if ( sgn < 0 ) *nc = -*nc;
00489 return(0);
00490 }
00491
00492 /*
00493     #] MulRat :
00494     #[ DivRat :      WORD DivRat(a,na,b,nb,c,nc)
00495
00496     Divides the rational a by the rational b.
00497
00498 */
00499
00500 int DivRat(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00501 {
00502     GETBIDENTITY
00503     WORD i, j;
00504     int ret;
00505     UWORD *xd,*xe,xx;
00506     if ( !nb ) {
00507         MLOCK(ErrorMessageLock);
00508         MesPrint("Rational division by zero");
00509         MUNLOCK(ErrorMessageLock);
00510         return(-1);
00511     }
00512     j = i = (nb >= 0)? nb: -nb;
00513     xd = b; xe = b + i;
00514     do { xx = *xd; *xd++ = *xe; *xe++ = xx; } while ( --j > 0 );
00515     ret = MulRat(BHEAD a,na,b,nb,c,nc);
00516     xd = b; xe = b + i;
00517     do { xx = *xd; *xd++ = *xe; *xe++ = xx; } while ( --i > 0 );
00518     return(ret);
00519 }
00520
00521 /*
00522     #] DivRat :
00523     #[ Simplify :      WORD Simplify(a,na,b,nb)
00524
00525     Determines the greatest common denominator of a and b and
00526     divides both by it. A possible sign is put in a. This is
00527     the simplification of the fraction a/b.
00528
00529 */
00530
00531 int Simplify(PHEAD UWORD *a, WORD *na, UWORD *b, WORD *nb)
00532 {
00533     GETBIDENTITY
00534     UWORD *x1,*x2,*x3;
00535     UWORD *x4;
00536     WORD n1,n2,n3,n4,sgn = 1;
00537     WORD i;
00538     UWORD *Siscrat5, *Siscrat6, *Siscrat7, *Siscrat8;
00539     if ( *na < 0 ) { *na = -*na; sgn = -sgn; }
00540     if ( *nb < 0 ) { *nb = -*nb; sgn = -sgn; }
00541     Siscrat5 = NumberMalloc("Simplify"); Siscrat6 = NumberMalloc("Simplify");
00542     Siscrat7 = NumberMalloc("Simplify"); Siscrat8 = NumberMalloc("Simplify");
00543     x1 = Siscrat8; x2 = Siscrat7;
00544     if ( *nb == 1 ) {
00545         x3 = Siscrat6;
00546         if ( DivLong(a,*na,b,*nb,x1,&n1,x2,&n2) ) goto SimpErr;
00547         if ( !n2 ) {
00548             for ( i = 0; i < n1; i++ ) *a++ = *x1++;
00549             *na = n1;
00550             *b = 1;
00551         }
00552     } else {
00553         UWORD y1, y2, y3;
00554         y2 = *b;
00555         y3 = *x2;
00556         do { y1 = y2 % y3; y2 = y3; } while ( ( y3 = y1 ) != 0 );
00557         if ( ( *x2 = y2 ) != 1 ) {
00558             *b /= y2;
00559             if ( DivLong(a,*na,x2,(WORD)1,x1,&n1,x3,&n3) ) goto SimpErr;
00560             for ( i = 0; i < n1; i++ ) *a++ = *x1++;
00561             *na = n1;
00562         }
00563     }
00564 }
00565 #ifndef NEWTRICK
00566 else if ( *na >= GCDMAX && *nb >= GCDMAX ) {
00567     n1 = i = *na; x3 = a;
00568     NCOPY(x1,x3,i);
00569     x3 = b; n2 = i = *nb;
00570     NCOPY(x2,x3,i);
00571     x4 = Siscrat5;

```

```

00572     x2 = Siscrat6;
00573     x3 = Siscrat7;
00574     if ( GcdLong(BHEAD Siscrat8,n1,Siscrat7,n2,x2,&n3) ) goto SimpErr;
00575     n2 = n3;
00576     if ( *x2 != 1 || n2 != 1 ) {
00577         DivLong(a,*na,x2,n2,x1,&n1,x4,&n4);
00578         *na = i = n1;
00579         NCOPY(a,x1,i);
00580         DivLong(b,*nb,x2,n2,x3,&n3,x4,&n4);
00581         *nb = i = n3;
00582         NCOPY(b,x3,i);
00583     }
00584 }
00585 #endif
00586 else {
00587     x4 = Siscrat5;
00588     n1 = i = *na; x3 = a;
00589     NCOPY(x1,x3,i);
00590     x3 = b; n2 = i = *nb;
00591     NCOPY(x2,x3,i);
00592     x1 = Siscrat8; x2 = Siscrat7; x3 = Siscrat6;
00593     for(;;){
00594         if ( DivLong(x1,n1,x2,n2,x4,&n4,x3,&n3) ) goto SimpErr;
00595         if ( !n3 ) break;
00596         if ( n2 == 1 ) {
00597             while ( ( *x1 = (*x2) % (*x3) ) != 0 ) { *x2 = *x3; *x3 = *x1; }
00598             *x2 = *x3;
00599             break;
00600         }
00601         if ( DivLong(x2,n2,x3,n3,x4,&n4,x1,&n1) ) goto SimpErr;
00602         if ( !n1 ) { x2 = x3; n2 = n3; x3 = Siscrat7; break; }
00603         if ( n3 == 1 ) {
00604             while ( ( *x2 = (*x3) % (*x1) ) != 0 ) { *x3 = *x1; *x1 = *x2; }
00605             *x2 = *x1;
00606             n2 = 1;
00607             break;
00608         }
00609         if ( DivLong(x3,n3,x1,n1,x4,&n4,x2,&n2) ) goto SimpErr;
00610         if ( !n2 ) { x2 = x1; n2 = n1; x1 = Siscrat7; break; }
00611         if ( n1 == 1 ) {
00612             while ( ( *x3 = (*x1) % (*x2) ) != 0 ) { *x1 = *x2; *x2 = *x3; }
00613             break;
00614         }
00615     }
00616     if ( *x2 != 1 || n2 != 1 ) {
00617         DivLong(a,*na,x2,n2,x1,&n1,x4,&n4);
00618         *na = i = n1;
00619         NCOPY(a,x1,i);
00620         DivLong(b,*nb,x2,n2,x3,&n3,x4,&n4);
00621         *nb = i = n3;
00622         NCOPY(b,x3,i);
00623     }
00624 }
00625 if ( sgn < 0 ) *na = -*na;
00626 NumberFree(Siscrat5,"Simplify"); NumberFree(Siscrat6,"Simplify");
00627 NumberFree(Siscrat7,"Simplify"); NumberFree(Siscrat8,"Simplify");
00628 return(0);
00629 SimpErr:
00630 MLOCK(ErrorMessageLock);
00631 MesCall("Simplify");
00632 MUNLOCK(ErrorMessageLock);
00633 NumberFree(Siscrat5,"Simplify"); NumberFree(Siscrat6,"Simplify");
00634 NumberFree(Siscrat7,"Simplify"); NumberFree(Siscrat8,"Simplify");
00635 SETERROR(-1)
00636 }
00637
00638 /*
00639 #] Simplify :
00640 #[ AccumGCD :      WORD AccumGCD(PHEAD a,na,b,nb)
00641
00642 Routine takes the rational GCD of the fractions in a and b and
00643 replaces a by the GCD of the two.
00644 The rational GCD is defined as the rational that consists of
00645 the GCD of the numerators divided by the GCD of the denominators
00646 */
00647
00648 int AccumGCD(PHEAD UWORD *a, WORD *na, UWORD *b, WORD nb)
00649 {
00650     GETBIDENTITY
00651     WORD nna,nnb,numa,numb,dena,denb,numc,denc;
00652     UWORD *GCDbuffer = NumberMalloc("AccumGCD");
00653     int i;
00654     nna = *na; if ( nna < 0 ) nna = -nna; nna = (nna-1)/2;
00655     nnb = nb; if ( nnb < 0 ) nnb = -nnb; nnb = (nnb-1)/2;
00656     UnPack(a,nna,&dena,&numa);
00657     UnPack(b,nnb,&denb,&numb);
00658     if ( GcdLong(BHEAD a,numa,b,numb,GCDbuffer,&numc) ) goto AccErr;

```

```

00659     numa = numc;
00660     for ( i = 0; i < numa; i++ ) a[i] = GCDbuffer[i];
00661     if ( GcdLong(BHEAD a+nna,dena,b+nnb,denb,GCDbuffer,&denc) ) goto AccErr;
00662     dena = denc;
00663     for ( i = 0; i < dena; i++ ) a[i+nna] = GCDbuffer[i];
00664     Pack(a,&numa,a+nna,dena);
00665     *na = INCLENG(numa);
00666     NumberFree(GCDbuffer,"AccumGCD");
00667     return(0);
00668 AccErr:
00669     MLOCK(ErrorMessageLock);
00670     MesCall("AccumGCD");
00671     MUNLOCK(ErrorMessageLock);
00672     NumberFree(GCDbuffer,"AccumGCD");
00673     SETERROR(-1)
00674 }
00675
00676 /*
00677     #] AccumGCD :
00678     #[ TakeRatRoot:
00679 */
00680
00681 int TakeRatRoot(UWORD *a, WORD *n, WORD power)
00682 {
00683     WORD number,denom, nn;
00684     if ( ( power & 1 ) == 0 && *n < 0 ) return(1);
00685     if ( ABS(*n) == 1 && a[0] == 1 && a[1] == 1 ) return(0);
00686     nn = ABS(*n);
00687     UnPack(a,nn,&denom,&number);
00688     if ( TakeLongRoot(a+nn,&denom,power) ) return(1);
00689     if ( TakeLongRoot(a,&number,power) ) return(1);
00690     Pack(a,&number,a+nn,denom);
00691     if ( *n < 0 ) *n = -number;
00692     else          *n = number;
00693     return(0);
00694 }
00695
00696 /*
00697     #] TakeRatRoot:
00698     #] RekenRational :
00699     #[ RekenLong :
00700     #[ AddLong :          WORD AddLong(a,na,b,nb,c,nc)
00701
00702     Long addition. Uses addition and subtraction of positive numbers.
00703
00704 */
00705
00706 int AddLong(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00707 {
00708     WORD sgn, res;
00709     if ( na < 0 ) {
00710         if ( nb < 0 ) {
00711             if ( AddPLon(a,-na,b,-nb,c,nc) ) return(-1);
00712             *nc = -*nc;
00713             return(0);
00714         }
00715         else {
00716             na = -na;
00717             sgn = -1;
00718         }
00719     }
00720     else {
00721         if ( nb < 0 ) {
00722             nb = -nb;
00723             sgn = 1;
00724         }
00725         else { return( AddPLon(a,na,b,nb,c,nc) ); }
00726     }
00727     if ( ( res = BigLong(a,na,b,nb) ) > 0 ) {
00728         SubPLon(a,na,b,nb,c,nc);
00729         if ( sgn < 0 ) *nc = -*nc;
00730     }
00731     else if ( res < 0 ) {
00732         SubPLon(b,nb,a,na,c,nc);
00733         if ( sgn > 0 ) *nc = -*nc;
00734     }
00735     else {
00736         *nc = 0;
00737         *c = 0;
00738     }
00739     return(0);
00740 }
00741
00742 /*
00743     #] AddLong :
00744     #[ AddPLon :          WORD AddPLon(a,na,b,nb,c,nc)
00745

```



```

00746     Adds two long integers a and b and puts the result in c.
00747     The length of a and b are na and nb. The length of c is returned in nc.
00748     c can be a or b.
00749  */
00750
00751 int AddPLon(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00752 {
00753     UWORD carry = 0, e, nd = 0;
00754     while ( na && nb ) {
00755         e = *a;
00756         *c = e + *b + carry;
00757         if ( carry ) {
00758             if ( e < *c ) carry = 0;
00759         }
00760         else {
00761             if ( e > *c ) carry = 1;
00762         }
00763         a++; b++; c++; nd++; na--; nb--;
00764     }
00765     while ( na ) {
00766         if ( carry ) {
00767             *c = *a++ + carry;
00768             if ( *c++ ) carry = 0;
00769         }
00770         else *c++ = *a++;
00771         nd++; na--;
00772     }
00773     while ( nb ) {
00774         if ( carry ) {
00775             *c = *b++ + carry;
00776             if ( *c++ ) carry = 0;
00777         }
00778         else *c++ = *b++;
00779         nd++; nb--;
00780     }
00781     if ( carry ) {
00782         nd++;
00783         if ( nd > (UWORD)AM.MaxTal ) {
00784             MLOCK(ErrorMessageLock);
00785             MesPrint("Overflow in addition");
00786             MUNLOCK(ErrorMessageLock);
00787             return(-1);
00788         }
00789         *c++ = carry;
00790     }
00791     *nc = nd;
00792     return(0);
00793 }
00794
00795 /*
00796     #] AddPLon :
00797     #[ SubPLon :      void SubPLon(a,na,b,nb,c,nc)
00798
00799     Subtracts b from a. Assumes that a > b. Result in c.
00800     c can be a or b.
00801
00802  */
00803
00804 void SubPLon(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00805 {
00806     UWORD borrow = 0, e, nd = 0;
00807     while ( nb ) {
00808         e = *a;
00809         if ( borrow ) {
00810             *c = e - *b - borrow;
00811             if ( *c < e ) borrow = 0;
00812         }
00813         else {
00814             *c = e - *b;
00815             if ( *c > e ) borrow = 1;
00816         }
00817         a++; b++; c++; na--; nb--; nd++;
00818     }
00819     while ( na ) {
00820         if ( borrow ) {
00821             if ( *a ) { *c++ = *a++ - 1; borrow = 0; }
00822             else { *c++ = (UWORD)(-1); a++; }
00823         }
00824         else *c++ = *a++;
00825         na--; nd++;
00826     }
00827     while ( nd && !*--c ) { nd--; }
00828     *nc = (WORD)nd;
00829 }
00830
00831 /*
00832     #] SubPLon :

```

```

00833      #[ MulLong :          WORD MulLong(a,na,b,nb,c,nc)
00834
00835      Does a Long multiplication. Assumes that WORD is half the size
00836      of a LONG to work out the scheme! The number of operations is
00837      the canonical na*nb multiplications.
00838      c should not overlap with a or b.
00839
00840      */
00841
00842      int MulLong(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
00843      {
00844          WORD sgn = 1;
00845          UWORD i, *ic, *ia;
00846          RLONG t, bb;
00847          if ( !na || !nb ) { *nc = 0; return(0); }
00848          if ( na < 0 ) { na = -na; sgn = -sgn; }
00849          if ( nb < 0 ) { nb = -nb; sgn = -sgn; }
00850          *nc = i = na + nb;
00851          if ( i > (UWORD)(AM.MaxTal+1) ) goto MulLov;
00852          ic = c;
00853      /*
00854      #[ GMP stuff :
00855      */
00856      #ifdef WITHGMP
00857          if (na > 3 && nb > 3) {
00858              /* mp_limb_t res; */
00859              UWORD *to, *from;
00860              int j;
00861              GETIDENTITY
00862              UWORD *DLscrat9 = NumberMalloc("MulLong"), *DLscratA = NumberMalloc("MulLong"), *DLscratB =
00863              NumberMalloc("MulLong");
00864              #if ( GMPSPREAD != 1 )
00865                  if ( na & 1 ) {
00866                      from = a; a = to = DLscrat9; j = na; NCOPY(to, from, j);
00867                      a[na++] = 0;
00868                      ++*nc;
00869                  } else
00870                  if ( (LONG)a & (sizeof(mp_limb_t)-1) ) {
00871                      from = a; a = to = DLscrat9; j = na; NCOPY(to, from, j);
00872                  }
00873              #endif
00874              #if ( GMPSPREAD != 1 )
00875                  if ( nb & 1 ) {
00876                      from = b; b = to = DLscratA; j = nb; NCOPY(to, from, j);
00877                      b[nb++] = 0;
00878                      ++*nc;
00879                  } else
00880                  if ( (LONG)b & (sizeof(mp_limb_t)-1) ) {
00881                      from = b; b = to = DLscratA; j = nb; NCOPY(to, from, j);
00882                  }
00883              #endif
00884              if ( ( *nc > (WORD)i ) || ( (LONG)c & (LONG)(sizeof(mp_limb_t)-1) ) ) {
00885                  ic = DLscratB;
00886              }
00887              if ( na < nb ) {
00888                  /* res = */
00889                  mpn_mul((mp_ptr)ic, (mp_srcptr)b, nb/GMPSPREAD, (mp_srcptr)a, na/GMPSPREAD);
00890              } else {
00891                  /* res = */
00892                  mpn_mul((mp_ptr)ic, (mp_srcptr)a, na/GMPSPREAD, (mp_srcptr)b, nb/GMPSPREAD);
00893              }
00894              while ( ic[i-1] == 0 ) i--;
00895              *nc = i;
00896          /*
00897          if ( res == 0 ) *nc -= GMPSPREAD;
00898          else if ( res <= WORDMASK ) --*nc;
00899          */
00900          if ( ic != c ) {
00901              j = *nc; NCOPY(c, ic, j);
00902          }
00903          if ( sgn < 0 ) *nc = -( *nc );
00904          NumberFree(DLscrat9, "MulLong"); NumberFree(DLscratA, "MulLong");
00905          NumberFree(DLscratB, "MulLong");
00906          return(0);
00907      }
00908      #endif
00909      /*
00910      #] GMP stuff :
00911      */
00912      do { *ic++ = 0; } while ( --i > 0 );
00913      do {
00914          ia = a;
00915          ic = c++;
00916          t = 0;
00917          i = na;

```

```

00918         bb = (RLONG) (*b++);
00919         do {
00920             t = (*ia++) * bb + t + *ic;
00921             *ic++ = (WORD)t;
00922             t >>= BITSINWORD;          /* should actually be a swap */
00923         } while ( --i > 0 );
00924         if ( t ) *ic = (UWORD)t;
00925     } while ( --nb > 0 );
00926     if ( !*ic ) (*nc)--;
00927     if ( *nc > AM.MaxTal ) goto MulLov;
00928     if ( sgn < 0 ) *nc = -(*nc);
00929     return(0);
00930 MulLov:
00931     MLOCK(ErrorMessageLock);
00932     MesPrint("Overflow in Multiplication");
00933     MUNLOCK(ErrorMessageLock);
00934     return(-1);
00935 }
00936
00937 /*
00938     #] MulLong :
00939     #[ BigLong :          WORD BigLong(a,na,b,nb)
00940
00941     Returns > 0 if a > b, < 0 if b > a and 0 if a == b
00942
00943 */
00944
00945 int BigLong(UWORD *a, WORD na, UWORD *b, WORD nb)
00946 {
00947     a += na;
00948     b += nb;
00949     while ( na && !--a ) na--;
00950     while ( nb && !--b ) nb--;
00951     if ( nb < na ) return(1);
00952     if ( nb > na ) return(-1);
00953     while ( --na >= 0 ) {
00954         if ( *a > *b ) return(1);
00955         else if ( *b > *a ) return(-1);
00956         a--; b--;
00957     }
00958     return(0);
00959 }
00960
00961 /*
00962     #] BigLong :
00963     #[ DivLong :          WORD DivLong(a,na,b,nb,c,nc,d,nd)
00964
00965     This is the long division which knows a couple of exceptions.
00966     It uses therefore a recursive call for the renormalization.
00967     The quotient comes in c and the remainder in d.
00968     d may be overlapping with b. It may also be identical to a.
00969     c should not overlap with a, but it can overlap with b.
00970
00971 */
00972
00973 int DivLong(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c,
00974             WORD *nc, UWORD *d, WORD *nd)
00975 {
00976     WORD sgnA = 1, sgnb = 1, ne, nf, ng, nh;
00977     WORD i, ni;
00978     UWORD *w1, *w2;
00979     RLONG t, v;
00980     UWORD *e, *f, *ff, *g, norm, estim;
00981 #ifdef WITHGMP
00982     UWORD *DLscrat9, *DLscratA, *DLscratB, *DLscratC;
00983 #endif
00984     RLONG esthelp;
00985     if ( !nb ) {
00986         MLOCK(ErrorMessageLock);
00987         MesPrint("Division by zero");
00988         MUNLOCK(ErrorMessageLock);
00989         return(-1);
00990     }
00991     if ( !na ) { *nc = *nd = 0; return(0); }
00992     if ( na < 0 ) { sgnA = -sgnA; na = -na; }
00993     if ( nb < 0 ) { sgnb = -sgnb; nb = -nb; }
00994     if ( na < nb ) {
00995         for ( i = 0; i < na; i++ ) *d++ = *a++;
00996         *nd = na;
00997         *nc = 0;
00998     }
00999     else if ( nb == na && ( i = BigLong(b,nb,a,na) ) >= 0 ) {
01000         if ( i > 0 ) {
01001             for ( i = 0; i < na; i++ ) *d++ = *a++;
01002             *nd = na;
01003             *nc = 0;
01004         }

```

```

01005         else {
01006             *c = 1;
01007             *nc = 1;
01008             *nd = 0;
01009         }
01010     }
01011     else if ( nb == 1 ) {
01012         if ( *b == 1 ) {
01013             for ( i = 0; i < na; i++ ) *c++ = *a++;
01014             *nc = na;
01015             *nd = 0;
01016         }
01017         else {
01018             w1 = a+na;
01019             *nc = ni = na;
01020             *nd = 1;
01021             w2 = c+ni;
01022             v = (RLONG) (*b);
01023             t = (RLONG) (*--w1);
01024             while ( --ni >= 0 ) {
01025                 *--w2 = t / v;
01026                 t -= v * (*w2);
01027                 if ( ni ) {
01028                     t <= BITSINWORD;
01029                     t += *--w1;
01030                 }
01031             }
01032             if ( ( *d = (UWORD)t ) == 0 ) *nd = 0;
01033             if ( !*(c+na-1) ) (*nc)--;
01034         }
01035     }
01036     else {
01037         GETIDENTITY
01038     /*
01039         #! GMP stuff :
01040
01041         We start with copying a and b.
01042         Then we make space for c and d.
01043         Next we call mpn_tdiv_qr
01044         We adjust sizes and copy to c and d if needed.
01045         Finally the signs are settled.
01046     */
01047     #ifdef WITHGMP
01048         if ( na > 4 && nb > 3 ) {
01049             UWORD *ic, *id, *to, *from;
01050             int j = na - nb;
01051             DLscrat9 = NumberMalloc("DivLong"); DLscratA = NumberMalloc("DivLong");
01052             DLscratB = NumberMalloc("DivLong"); DLscratC = NumberMalloc("DivLong");
01053
01054             #if ( GMPSPREAD != 1 )
01055                 if ( na & 1 ) {
01056                     from = a; a = to = DLscrat9; i = na; NCOPY(to, from, i);
01057                     a[na++] = 0;
01058                 } else
01059             #endif
01060                 if ( (LONG)a & (sizeof(mp_limb_t)-1) ) {
01061                     from = a; a = to = DLscrat9; i = na; NCOPY(to, from, i);
01062                 }
01063
01064             #if ( GMPSPREAD != 1 )
01065                 if ( nb & 1 ) {
01066                     from = b; b = to = DLscratA; i = nb; NCOPY(to, from, i);
01067                     b[nb++] = 0;
01068                 } else
01069             #endif
01070                 if ( ( (LONG)b & (sizeof(mp_limb_t)-1) ) != 0 ) {
01071                     from = b; b = to = DLscratA; i = nb; NCOPY(to, from, i);
01072                 }
01073             #if ( GMPSPREAD != 1 )
01074             /*
01075                 Not recognizing this case was a nasty and extremely rare bug.
01076                 In the case that c == a and na is odd and nc == na and b
01077                 still needs to be used, the least significant UWORD of b got
01078                 overwritten by zero. (22-mar-2023)
01079             */
01080             ic = DLscratB; id = DLscratC;
01081         #else
01082             if ( ( (LONG)c & (sizeof(mp_limb_t)-1) ) != 0 ) ic = DLscratB;
01083             else ic = c;
01084
01085             if ( ( (LONG)d & (sizeof(mp_limb_t)-1) ) != 0 ) id = DLscratC;
01086             else id = d;
01087         #endif
01088         mpn_tdiv_qr((mp_limb_t *)ic, (mp_limb_t *)id, (mp_size_t)0,
01089             (const mp_limb_t *)a, (mp_size_t)(na/GMPSPREAD),
01090             (const mp_limb_t *)b, (mp_size_t)(nb/GMPSPREAD));
01091         while ( j >= 0 && ic[j] == 0 ) j--;

```

```

01092         j++; *nc = j;
01093         if ( c != ic ) { NCOPY(c,ic,j); }
01094         j = nb-1;
01095         while ( j >= 0 && id[j] == 0 ) j--;
01096         j++; *nd = j;
01097         if ( d != id ) { NCOPY(d,id,j); }
01098         if ( sgna < 0 ) { *nc = -(*nc); *nd = -(*nd); }
01099         if ( sgnb < 0 ) { *nc = -(*nc); }
01100         NumberFree(DLscrat9,"DivLong"); NumberFree(DLscratA,"DivLong");
01101         NumberFree(DLscratB,"DivLong"); NumberFree(DLscratC,"DivLong");
01102         return(0);
01103     }
01104 #endif
01105 /*
01106 #] GMP stuff :
01107 */
01108 /* Start with normalization operation */
01109
01110 e = NumberMalloc("DivLong"); f = NumberMalloc("DivLong"); g = NumberMalloc("DivLong");
01111 if ( b[nb-1] == (FULLMAX-1) ) norm = 1;
01112 else {
01113     norm = (UWORD) (((ULONG)FULLMAX) / (ULONG) ((b[nb-1]+1L)));
01114 }
01115 f[na] = 0;
01116 if ( MulLong(b,nb,&norm,1,e,&ne) ||
01117     MulLong(a,na,&norm,1,f,&nf) ) {
01118     NumberFree(e,"DivLong"); NumberFree(f,"DivLong"); NumberFree(g,"DivLong");
01119     return(-1);
01120 }
01121 if ( BigLong(f+nf-ne,ne,e,ne) >= 0 ) {
01122     SubPLon(f+nf-ne,ne,e,ne,f+nf-ne,&nh);
01123     w1 = c + (nf-ne);
01124     *nc = nf-ne+1;
01125 }
01126 else {
01127     nh = ne;
01128     *nc = nf-ne;
01129     w1 = 0;
01130 }
01131 w2 = c; i = *nc; do { *w2++ = 0; } while ( --i > 0 );
01132 nf = na;
01133 ni = nf-ne;
01134 esthelp = (RLONG) (e[ne-1]) + 1L;
01135 while ( nf >= ne ) {
01136     if ( (WORD)esthelp == 0 ) {
01137         estim = (WORD) ((( (RLONG) (f[nf])) «BITSINWORD) + f[nf-1] »BITSINWORD);
01138     }
01139     else {
01140         estim = (WORD) ((( (RLONG) (f[nf])) «BITSINWORD) + f[nf-1] ) / esthelp);
01141     }
01142     /* This estimate may be up to two too small */
01143     if ( estim ) {
01144         MulLong(e,ne,&estim,1,g,&ng);
01145         nh = ne + 1; if ( !f[ni+ne] ) nh--;
01146         SubPLon(f+ni,nh,g,ng,f+ni,&nh);
01147     }
01148     else {
01149         w2 = f+ni+ne; nh = ne+1;
01150         while ( ( nh > 0 ) && !*w2 ) { nh--; w2--; }
01151     }
01152     if ( BigLong(f+ni,nh,e,ne) >= 0 ) {
01153         estim++;
01154         SubPLon(f+ni,nh,e,ne,f+ni,&nh);
01155         if ( BigLong(f+ni,nh,e,ne) >= 0 ) {
01156             estim++;
01157             SubPLon(f+ni,nh,e,ne,f+ni,&nh);
01158             if ( BigLong(f+ni,nh,e,ne) >= 0 ) {
01159                 MLOCK(ErrorMessageLock);
01160                 MesPrint("Problems in DivLong");
01161                 AO.OutSkip = 3;
01162                 FiniLine();
01163                 i = na;
01164                 while ( --i >= 0 ) { TalToLine((UWORD) (*a++)); TokenToLine((UBYTE *) " "); }
01165                 FiniLine();
01166                 i = nb;
01167                 while ( --i >= 0 ) { TalToLine((UWORD) (*b++)); TokenToLine((UBYTE *) " "); }
01168                 AO.OutSkip = 0;
01169                 FiniLine();
01170                 MUNLOCK(ErrorMessageLock);
01171                 NumberFree(e,"DivLong"); NumberFree(f,"DivLong"); NumberFree(g,"DivLong");
01172                 return(-1);
01173             }
01174         }
01175     }
01176     c[ni] = estim;
01177     nf--;
01178     ni--;

```

```

01179     }
01180     if ( w1 ) *w1 = 1;
01181
01182     /* Finish with the renormalization operation */
01183
01184     if ( nh > 0 ) {
01185         if ( norm == 1 ) {
01186             *nd = i = nh; ff = f;
01187             NCOPY(d,ff,i);
01188         }
01189         else {
01190             w1 = f+nh;
01191             *nd = ni = nh;
01192             w2 = d+ni;
01193             v = norm;
01194             t = (RLONG) (*--w1);
01195             while ( --ni >= 0 ) {
01196                 *--w2 = t / v;
01197                 t -= v * (*w2);
01198                 if ( ni ) {
01199                     t <<= BITSINWORD;
01200                     t += *--w1;
01201                 }
01202             }
01203             if ( t ) {
01204                 MLOCK(ErrorMessageLock);
01205                 MesPrint("Error in DivLong");
01206                 MUNLOCK(ErrorMessageLock);
01207                 NumberFree(e,"DivLong"); NumberFree(f,"DivLong"); NumberFree(g,"DivLong");
01208                 return(-1);
01209             }
01210             if ( !(d+nh-1) ) (*nd)--;
01211         }
01212     }
01213     else { *nd = 0; }
01214     NumberFree(e,"DivLong"); NumberFree(f,"DivLong"); NumberFree(g,"DivLong");
01215 }
01216 if ( sgna < 0 ) { *nc = -(*nc); *nd = -(*nd); }
01217 if ( sgnb < 0 ) { *nc = -(*nc); }
01218 return(0);
01219 }
01220
01221 /*
01222     #] DivLong :
01223     #[ RaisPow :      WORD RaisPow(a,na,b)
01224
01225     Raises a to the power b. a is a Long integer and b >= 0.
01226     The method that is used works with a bitdecomposition of b.
01227 */
01228
01229 int RaisPow(PHEAD UWORD *a, WORD *na, UWORD b)
01230 {
01231     GETBIDENTITY
01232     WORD i, nu;
01233     UWORD *it, *iu, c;
01234     UWORD *is, *iss;
01235     WORD ns, nt, nmod;
01236     nmod = ABS(AN.ncmod);
01237     if ( !*na || ( ( *na == 1 ) && ( *a == 1 ) ) ) return(0);
01238     if ( !b ) { *na=1; *a=1; return(0); }
01239     is = NumberMalloc("RaisPow");
01240     it = NumberMalloc("RaisPow");
01241     for ( i = 0; i < ABS(*na); i++ ) is[i] = a[i];
01242     ns = *na;
01243     c = b;
01244     for ( i = 0; i < BITSINWORD; i++ ) {
01245         if ( !c ) break;
01246         c /= 2;
01247     }
01248     i--;
01249     c = 1 << i;
01250     while ( --i >= 0 ) {
01251         c /= 2;
01252         if (MulLong(is,ns,is,ns,it,&nt)) goto RaisOvl;
01253         if ( b & c ) {
01254             if ( MulLong(it,nt,a,*na,is,&ns) ) goto RaisOvl;
01255         }
01256         else {
01257             iu = is; is = it; it = iu;
01258             nu = ns; ns = nt; nt = nu;
01259         }
01260         if ( nmod != 0 ) {
01261             if ( DivLong(is,ns,(UWORD *)AC.cmod,nmod,it,&nt,is,&ns) ) goto RaisOvl;
01262         }
01263     }
01264     if ( ( nmod != 0 ) && ( ( AC.modmode & POSNEG ) != 0 ) ) {
01265         NormalModulus(is,&ns);

```

```

01266     }
01267     if ( ( *na = i = ns ) != 0 ) { iss = is; i=ABS(i); NCOPY(a,iss,i); }
01268     NumberFree(is,"RaisPow"); NumberFree(it,"RaisPow");
01269     return(0);
01270 RaisOvl:
01271     MLOCK(ErrorMessageLock);
01272     MesCall("RaisPow");
01273     MUNLOCK(ErrorMessageLock);
01274     NumberFree(is,"RaisPow"); NumberFree(it,"RaisPow");
01275     SETERROR(-1)
01276 }
01277
01278 /*
01279     #] RaisPow :
01280     #[ RaisPowCached :
01281 */
01282
01297 void RaisPowCached (PHEAD WORD x, WORD n, UWORD **c, WORD *nc) {
01298
01299     int i,j;
01300     WORD new_small_power_maxx, new_small_power_maxn, ID;
01301     WORD *new_small_power_n;
01302     UWORD **new_small_power;
01303
01304     /* check whether to extend the array */
01305     if (x>=AT.small_power_maxx || n>=AT.small_power_maxn) {
01306
01307         new_small_power_maxx = AT.small_power_maxx;
01308         if (x>=AT.small_power_maxx)
01309             new_small_power_maxx = MaX(2*AT.small_power_maxx, x+1);
01310
01311         new_small_power_maxn = AT.small_power_maxn;
01312         if (n>=AT.small_power_maxn)
01313             new_small_power_maxn = MaX(2*AT.small_power_maxn, n+1);
01314
01315         new_small_power_n = (WORD*)
01316         Malloc1(new_small_power_maxx*new_small_power_maxn*sizeof(WORD),"RaisPowCached");
01317         new_small_power = (UWORD **) Malloc1(new_small_power_maxx*new_small_power_maxn*sizeof(UWORD
01318         *),"RaisPowCached");
01319
01320         for (i=0; i<new_small_power_maxx * new_small_power_maxn; i++) {
01321             new_small_power_n[i] = 0;
01322             new_small_power [i] = NULL;
01323         }
01324
01325         for (i=0; i<AT.small_power_maxx; i++)
01326             for (j=0; j<AT.small_power_maxn; j++) {
01327                 new_small_power_n[i*new_small_power_maxn+j] =
01328                 AT.small_power_n[i*AT.small_power_maxn+j];
01329                 new_small_power [i*new_small_power_maxn+j] = AT.small_power
01330                 [i*AT.small_power_maxn+j];
01331             }
01332
01333         if (AT.small_power_n != NULL) {
01334             M_free(AT.small_power_n,"RaisPowCached");
01335             M_free(AT.small_power,"RaisPowCached");
01336         }
01337
01338         AT.small_power_maxx = new_small_power_maxx;
01339         AT.small_power_maxn = new_small_power_maxn;
01340         AT.small_power_n    = new_small_power_n;
01341         AT.small_power      = new_small_power;
01342     }
01343
01344     /* check whether the results is already calculated */
01345     ID = x * AT.small_power_maxn + n;
01346
01347     if (AT.small_power[ID] == NULL) {
01348         #ifdef OLDRAISPOWCACHED
01349             AT.small_power[ID] = NumberMalloc("RaisPowCached");
01350             AT.small_power_n[ID] = 1;
01351             AT.small_power[ID][0] = x;
01352             RaisPow(BHEAD AT.small_power[ID], &AT.small_power_n[ID], n);
01353         #else
01354             UWORD *c = NumberMalloc("RaisPowCached");
01355             WORD i, k = 1;
01356             c[0] = x;
01357             RaisPow(BHEAD c, &k, n);
01358         /*
01359             And now get the proper amount.
01360         */
01361         if ( AT.InNumMem < k ) { /* We should start a new buffer */
01362             AT.InNumMem = 5*AM.MaxTal;
01363             AT.NumMem = (UWORD *) Malloc1(AT.InNumMem*sizeof(UWORD), "RaisPowCached");
01364         /*
01365             MesPrint(" Got an extra %l UWORDS in RaisPowCached",AT.InNumMem);
01366         */

```

```

01363     }
01364     for ( i = 0; i < k; i++ ) AT.NumMem[i] = c[i];
01365     AT.small_power[ID] = AT.NumMem;
01366     AT.small_power_n[ID] = k;
01367     AT.NumMem += k;
01368     AT.InNumMem -= k;
01369     NumberFree(c, "RaisPowCached");
01370 #endif
01371 }
01372
01373 /* return the result */
01374 *c = AT.small_power[ID];
01375 *nc = AT.small_power_n[ID];
01376 }
01377
01378 /*
01379     #] RaisPowCached :
01380     #[ RaisPowMod :
01381
01382     Computes the power x^n mod m
01383 */
01384 WORD RaisPowMod (WORD x, WORD n, WORD m) {
01385     LONG y=1, z=x;
01386     while (n) {
01387         if (n&1) { y*=z; y%=m; }
01388         z*=z; z%=m;
01389         n /= 2;
01390     }
01391     return (WORD)y;
01392 }
01393
01394 /*
01395     #] RaisPowMod :
01396     #[ NormalModulus : int NormalModulus(UWORD *a,WORD *na)
01397 */
01400 int NormalModulus(UWORD *a,WORD *na)
01401 {
01402     WORD n;
01403     if ( AC.halfmod == 0 ) {
01404         LOCK(AC.halfmodlock);
01405         if ( AC.halfmod == 0 ) {
01406             UWORD two[1], remain[1];
01407             WORD dummy;
01408             two[0] = 2;
01409             AC.halfmod = (UWORD *)Malloc1((ABS(AC.ncmod))*sizeof(UWORD), "halfmod");
01410             DivLong((UWORD *)AC.cmod, (ABS(AC.ncmod)), two, 1
01411                 , (UWORD *)AC.halfmod, &(AC.nhalfmod), remain, &dummy);
01412         }
01413         UNLOCK(AC.halfmodlock);
01414     }
01415     n = ABS(*na);
01416     if ( BigLong(a,n,AC.halfmod,AC.nhalfmod) > 0 ) {
01417         SubPLon((UWORD *)AC.cmod, (ABS(AC.ncmod)), a, n, a, &n);
01418         if ( *na > 0 ) { *na = -n; }
01419         else { *na = n; }
01420         return(1);
01421     }
01422     return(0);
01423 }
01424
01425 /*
01426     #] NormalModulus :
01427     #[ MakeInverses :
01428 */
01429 int MakeInverses(void)
01430 {
01431     WORD n = AC.cmod[0], i, inv2;
01432     if ( AC.ncmod != 1 ) return(1);
01433     if ( AC.modinverses == 0 ) {
01434         LOCK(AC.halfmodlock);
01435         if ( AC.modinverses == 0 ) {
01436             AC.modinverses = (UWORD *)Malloc1(n*sizeof(UWORD), "modinverses");
01437             AC.modinverses[0] = 0;
01438             AC.modinverses[1] = 1;
01439             for ( i = 2; i < n; i++ ) {
01440                 if ( GetModInverses(i,n,
01441                     (WORD *)(&(AC.modinverses[i])),&inv2) ) {
01442                     SETERROR(-1)
01443                 }
01444             }
01445         }
01446         UNLOCK(AC.halfmodlock);
01447     }
01448     return(0);
01449 }
01450
01451 /*

```



```

01464         #] MakeInverses :
01465         #[ GetModInverses :
01466     */
01477 int GetModInverses(WORD m1, WORD m2, WORD *im1, WORD *im2)
01478 {
01479     WORD a1, a2, a3;
01480     WORD b1, b2, b3;
01481     WORD x = m1, y, c, d = m2;
01482     if ( x < 1 || d <= 1 ) goto somethingwrong;
01483     a1 = 0; a2 = 1;
01484     b1 = 1; b2 = 0;
01485     for(;;) {
01486         c = d/x; y = d%x; /* a good compiler makes this faster than y=d-c*x */
01487         if ( y == 0 ) break;
01488         a3 = a1-c*a2; a1 = a2; a2 = a3;
01489         b3 = b1-c*b2; b1 = b2; b2 = b3;
01490         d = x; x = y;
01491     }
01492     if ( x != 1 ) goto somethingwrong;
01493     if ( a2 < 0 ) a2 += m2;
01494     if ( b2 < 0 ) b2 += m1;
01495     if (im1!=NULL) *im1 = a2;
01496     if (im2!=NULL) *im2 = b2;
01497     return(0);
01498 somethingwrong:
01499     MLOCK(ErrorMessageLock);
01500     MesPrint("Error trying to determine inverses in GetModInverses");
01501     MUNLOCK(ErrorMessageLock);
01502     return(-1);
01503 }
01504 /*
01505     #] GetModInverses :
01506     #[ GetLongModInverses :
01507 */
01508
01509 int GetLongModInverses(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *ia, WORD *nia, UWORD *ib,
    WORD *nib) {
01510
01511     UWORD *s, *t, *sa, *sb, *ta, *tb, *x, *y, *swap1;
01512     WORD ns, nt, nsa, nsb, nta, ntb, nx, ny, swap2;
01513
01514     s = NumberMalloc("GetLongModInverses");
01515     ns = na;
01516     WCOPY(s, a, ABS(ns));
01517
01518     t = NumberMalloc("GetLongModInverses");
01519     nt = nb;
01520     WCOPY(t, b, ABS(nt));
01521
01522     sa = NumberMalloc("GetLongModInverses");
01523     nsa = 1;
01524     sa[0] = 1;
01525
01526     sb = NumberMalloc("GetLongModInverses");
01527     nsb = 0;
01528
01529     ta = NumberMalloc("GetLongModInverses");
01530     nta = 0;
01531
01532     tb = NumberMalloc("GetLongModInverses");
01533     ntb = 1;
01534     tb[0] = 1;
01535
01536     x = NumberMalloc("GetLongModInverses");
01537     y = NumberMalloc("GetLongModInverses");
01538
01539     while (nt != 0) {
01540         DivLong(s, ns, t, nt, x, &nx, y, &ny);
01541         swap1=s; s=y; y=swap1;
01542         ns=ny;
01543         MulLong(x, nx, ta, nta, y, &ny);
01544         AddLong(sa, nsa, y, -ny, sa, &nsa);
01545         MulLong(x, nx, tb, ntb, y, &ny);
01546         AddLong(sb, nsb, y, -ny, sb, &nsb);
01547
01548         swap1=s; s=t; t=swap1;
01549         swap2=ns; ns=nt; nt=swap2;
01550         swap1=sa; sa=ta; ta=swap1;
01551         swap2=nsa; nsa=nta; nta=swap2;
01552         swap1=sb; sb=tb; tb=swap1;
01553         swap2=nsb; nsb=ntb; ntb=swap2;
01554     }
01555
01556     if (ia!=NULL) {
01557         *nia = nsa*ns;
01558         WCOPY(ia, sa, ABS(*nia));
01559     }

```

```

01560
01561     if (ib!=NULL) {
01562         *nib = nsb*ns;
01563         WCOPY(ib,sb,ABS(*nib));
01564     }
01565
01566     NumberFree(s,"GetLongModInverses");
01567     NumberFree(t,"GetLongModInverses");
01568     NumberFree(sa,"GetLongModInverses");
01569     NumberFree(sb,"GetLongModInverses");
01570     NumberFree(ta,"GetLongModInverses");
01571     NumberFree(tb,"GetLongModInverses");
01572     NumberFree(x,"GetLongModInverses");
01573     NumberFree(y,"GetLongModInverses");
01574
01575     return 0;
01576 }
01577
01578 /*
01579     #] GetLongModInverses :
01580     #[ Product :          WORD Product(a,na,b)
01581
01582     Multiplies the Long number in a with the WORD b.
01583
01584 */
01585
01586 int Product(UWORD *a, WORD *na, WORD b)
01587 {
01588     WORD i, sgn = 1;
01589     RLONG t, u;
01590     if ( *na < 0 ) { *na = -(*na); sgn = -sgn; }
01591     if ( b < 0 ) { b = -b; sgn = -sgn; }
01592     t = 0;
01593     u = (RLONG)b;
01594     for ( i = 0; i < *na; i++ ) {
01595         t += *a * u;
01596         *a++ = (UWORD)t;
01597         t >>= BITSINWORD;
01598     }
01599     if ( t > 0 ) {
01600         if ( ++(*na) > AM.MaxTal ) {
01601             MLOCK(ErrorMessageLock);
01602             MesPrint("Overflow in Product");
01603             MUNLOCK(ErrorMessageLock);
01604             return(-1);
01605         }
01606         *a = (UWORD)t;
01607     }
01608     if ( sgn < 0 ) *na = -(*na);
01609     return(0);
01610 }
01611
01612 /*
01613     #] Product :
01614     #[ Quotient :          UWORD Quotient(a,na,b)
01615
01616     Routine divides the long number a by b with the assumption that
01617     there is no remainder (like while computing binomials).
01618
01619 */
01620
01621 UWORD Quotient(UWORD *a, WORD *na, WORD b)
01622 {
01623     RLONG v, t;
01624     WORD i, j, sgn = 1;
01625     if ( ( i = *na ) < 0 ) { sgn = -1; i = -i; }
01626     if ( b < 0 ) { b = -b; sgn = -sgn; }
01627     if ( i == 1 ) {
01628         if ( ( *a /= (UWORD)b ) == 0 ) *na = 0;
01629         if ( sgn < 0 ) *na = -*na;
01630         return(0);
01631     }
01632     a += i;
01633     j = i;
01634     v = (RLONG)b;
01635     t = (RLONG)(--a);
01636     while ( --i >= 0 ) {
01637         *a = t / v;
01638         t -= v * (*a);
01639         if ( i ) {
01640             t <= BITSINWORD;
01641             t += --a;
01642         }
01643     }
01644     a += j - 1;
01645     if ( !*a ) j--;
01646     if ( sgn < 0 ) j = -j;

```

```

01647     *na = j;
01648     return(0);
01649 }
01650
01651 /*
01652     #] Quotient :
01653     #[ Remain10 :      WORD Remain10(a,na)
01654
01655     Routine divides a by 10 and gives the remainder as return value.
01656     The value of a will be the quotient! a must be positive.
01657 */
01658
01659 WORD Remain10(UWORD *a, WORD *na)
01660 {
01661     WORD i;
01662     RLONG t, u;
01663     UWORD *b;
01664     i = *na;
01665     t = 0;
01666     b = a + i - 1;
01667     while ( --i >= 0 ) {
01668         t += *b;
01669         *b-- = u = t / 10;
01670         t -= u * 10;
01671         if ( i > 0 ) t <= BITSINWORD;
01672     }
01673     if ( ( *na > 0 ) && !a[*na-1] ) (*na)--;
01674     return((WORD)t);
01675 }
01676
01677 /*
01678     #] Remain10 :
01679     #[ Remain4 :      WORD Remain4(a,na)
01680
01681     Routine divides a by 10000 and gives the remainder as return value.
01682     The value of a will be the quotient! a must be positive.
01683 */
01684
01685 WORD Remain4(UWORD *a, WORD *na)
01686 {
01687     WORD i;
01688     RLONG t, u;
01689     UWORD *b;
01690     i = *na;
01691     t = 0;
01692     b = a + i - 1;
01693     while ( --i >= 0 ) {
01694         t += *b;
01695         *b-- = u = t / 10000;
01696         t -= u * 10000;
01697         if ( i > 0 ) t <= BITSINWORD;
01698     }
01699     if ( ( *na > 0 ) && !a[*na-1] ) (*na)--;
01700     return((WORD)t);
01701 }
01702
01703 /*
01704     #] Remain4 :
01705     #[ PrtLong :      void PrtLong(a,na,s)
01706
01707     Puts the long number a in string s.
01708 */
01709
01710 void PrtLong(UWORD *a, WORD na, UBYTE *s)
01711 {
01712     GETIDENTITY
01713     WORD q, i;
01714     UBYTE *sa, *sb;
01715     UBYTE c;
01716     UWORD *bb, *b;
01717
01718     if ( na < 0 ) {
01719         *s++ = '-';
01720         na = -na;
01721     }
01722
01723     b = NumberMalloc("PrtLong");
01724     bb = b;
01725     i = na; while ( --i >= 0 ) *bb++ = *a++;
01726     a = b;
01727     if ( na > 2 ) {
01728         sa = s;
01729         do {
01730             q = Remain4(a,&na);

```

```

01734         *sa++ = (UBYTE) ('0' + (q%10));
01735         q /= 10;
01736         *sa++ = (UBYTE) ('0' + (q%10));
01737         q /= 10;
01738         *sa++ = (UBYTE) ('0' + (q%10));
01739         q /= 10;
01740         *sa++ = (UBYTE) ('0' + (q%10));
01741     } while ( na );
01742     while ( sa[-1] == '0' ) sa--;
01743     sb = s;
01744     s = sa;
01745     sa--;
01746     while ( sa > sb ) { c = *sa; *sa = *sb; *sb = c; sa--; sb++; }
01747 }
01748 else if ( na ) {
01749     sa = s;
01750     do {
01751         q = Remain10(a,&na);
01752         *sa++ = (UBYTE) ('0' + q);
01753     } while ( na );
01754     sb = s;
01755     s = sa;
01756     sa--;
01757     while ( sa > sb ) { c = *sa; *sa = *sb; *sb = c; sa--; sb++; }
01758 }
01759 else *s++ = '0';
01760 *s = '\0';
01761 NumberFree(b,"PrtLong");
01762 }
01763
01764 /*
01765     #] PrtLong :
01766     #[ GetLong :          WORD GetLong(s,a,na)
01767
01768     Reads a long number from a string.
01769     The string is zero terminated and contains only digits!
01770
01771     New algorithm: try to read 4 digits together before the result
01772     is accumulated.
01773 */
01774
01775 int GetLong(UBYTE *s, UWORD *a, WORD *na)
01776 {
01777     /*
01778         UWORD digit;
01779         *a = 0;
01780         *na = 0;
01781         while ( FG.cTable[*s] == 1 ) {
01782             digit = *s++ - '0';
01783             if ( *na && Product(a,na,(WORD)10) ) return(-1);
01784             if ( digit && AddLong(a,*na,&digit,(WORD)1,a,na) ) return(-1);
01785         }
01786         return(0);
01787     */
01788     UWORD digit, x = 0, y = 0;
01789     *a = 0;
01790     *na = 0;
01791     while ( FG.cTable[*s] == 1 ) {
01792         x = *s++ - '0';
01793         if ( FG.cTable[*s] != 1 ) { y = 10; break; }
01794         x = 10*x + *s++ - '0';
01795         if ( FG.cTable[*s] != 1 ) { y = 100; break; }
01796         x = 10*x + *s++ - '0';
01797         if ( FG.cTable[*s] != 1 ) { y = 1000; break; }
01798         x = 10*x + *s++ - '0';
01799         if ( *na && Product(a,na,(WORD)10000) ) return(-1);
01800         if ( ( digit = x ) != 0 && AddLong(a,*na,&digit,(WORD)1,a,na) )
01801             return(-1);
01802         y = 0;
01803     }
01804     if ( y ) {
01805         if ( *na && Product(a,na,(WORD)y) ) return(-1);
01806         if ( ( digit = x ) != 0 && AddLong(a,*na,&digit,(WORD)1,a,na) )
01807             return(-1);
01808     }
01809     return(0);
01810 }
01811
01812 /*
01813     #] GetLong :
01814     #[ GCD :          WORD GCD(a,na,b,nb,c,nc)
01815
01816     Algorithm to compute the GCD of two long numbers.
01817     See Knuth, sec 4.5.2 algorithm L.
01818
01819     We assume that both numbers are positive
01820

```

```

01821     NOTE!!!!. NumberMalloc gets called and it may not be freed
01822 */
01823
01824 #ifdef EXTRAGCD
01825
01826 #define Convert(ia,aa,naa) \
01827     if ( (LONG)ia < 0 ) { \
01828         ia = (ULONG)(~(LONG)ia); \
01829         aa[0] = ia; \
01830         if ( ( aa[1] = ia » BITSINWORD ) != 0 ) naa = -2; \
01831         else naa = -1; \
01832     } \
01833     else if ( ia == 0 ) { aa[0] = 0; naa = 0; } \
01834     else { \
01835         aa[0] = ia; \
01836         if ( ( aa[1] = ia » BITSINWORD ) != 0 ) naa = 2; \
01837         else naa = 1; \
01838     }
01839
01840 void GCD(UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
01841 {
01842     int ja = 0, jb = 0, j;
01843     UWORD *r,*t;
01844     UWORD *x1, *x2, *x3;
01845     WORD nd,naa,nbb;
01846     ULONG ia,ib,ic,id,u,v,w,q,T;
01847     UWORD aa[2], bb[2];
01848 /*
01849     First eliminate easy powers of 2^...
01850 */
01851     while ( a[0] == 0 ) { na--; ja++; a++; }
01852     while ( b[0] == 0 ) { nb--; jb++; b++; }
01853     if ( ja > jb ) ja = jb;
01854     if ( ja > 0 ) {
01855         j = ja;
01856         do { *c++ = 0; } while ( --j > 0 );
01857     }
01858 /*
01859     Now arrange things such that a >= b
01860 */
01861     if ( na < nb ) {
01862         jb = na; na = nb; nb = jb;
01863     }
01864     exch:
01865     r = a; a = b; b = r;
01866     }
01867     else if ( na == nb ) {
01868         r = a+na;
01869         t = b+nb;
01870         j = na;
01871         while ( --j >= 0 ) {
01872             if ( *--r > *--t ) break;
01873             if ( *r < *t ) goto exch;
01874         }
01875         if ( j < 0 ) {
01876             out:
01877             j = nb;
01878             NCOPY(c,b,j);
01879             *nc = nb+ja;
01880             return;
01881         }
01882     }
01883     {
01884         MLOCK(ErrorMessageLock);
01885         MesPrint("Ordered input, ja = %d", (WORD)ja);
01886         AO.OutSkip = 3;
01887         FiniLine();
01888         j = na; r = a;
01889         while ( --j >= 0 ) { TalToLine((UWORD)(*r++)); TokenToLine((UBYTE *)" "); }
01890         FiniLine();
01891         j = nb; r = b;
01892         while ( --j >= 0 ) { TalToLine((UWORD)(*r++)); TokenToLine((UBYTE *)" "); }
01893         AO.OutSkip = 0;
01894         FiniLine();
01895         MUNLOCK(ErrorMessageLock);
01896     }
01897 */
01898 /*
01899     We have now that A > B
01900     The loop recognizes the case that na-nb >= 1
01901     In that case we just have to divide!
01902 */
01903     r = x1 = NumberMalloc("GCD"); t = x2 = NumberMalloc("GCD"); x3 = NumberMalloc("GCD");
01904     j = na;
01905     NCOPY(r,a,j);
01906     j = nb;
01907     NCOPY(t,b,j);

```

```

01908
01909     for(;;) {
01910
01911         while ( na > nb ) {
01912 toobad:
01913             DivLong(x1,na,x2,nb,c,nc,x3,&nd);
01914             if ( nd == 0 ) { b = x2; goto out; }
01915             t = x1; x1 = x2; x2 = x3; x3 = t; na = nb; nb = nd;
01916             if ( na == 2 ) break;
01917         }
01918     /*
01919     Here we can use the shortcut.
01920 */
01921     if ( na == 2 ) {
01922         v = x1[0] + ( ((ULONG)x1[1]) << BITSINWORD );
01923         w = x2[0];
01924         if ( nb == 2 ) w += ((ULONG)x2[1]) << BITSINWORD;
01925 #ifdef EXTRAGCD2
01926         v = GCD2(v,w);
01927 #else
01928         do { u = v%w; v = w; w = u; } while ( w );
01929 #endif
01930         c[0] = (UWORD)v;
01931         if ( ( c[1] = (UWORD)(v >> BITSINWORD) ) != 0 ) *nc = 2+ja;
01932         else *nc = 1+ja;
01933         NumberFree(x1,"GCD"); NumberFree(x2,"GCD"); NumberFree(x3,"GCD");
01934         return;
01935     }
01936     if ( na == 1 ) {
01937         UWORD ui, uj;
01938         ui = x1[0]; uj = x2[0];
01939 #ifdef EXTRAGCD2
01940         ui = (UWORD)GCD2((ULONG)ui,(ULONG)uj);
01941 #else
01942         do { nd = ui%uj; ui = uj; uj = nd; } while ( nd );
01943 #endif
01944         c[0] = ui;
01945         *nc = 1 + ja;
01946         NumberFree(x1,"GCD"); NumberFree(x2,"GCD"); NumberFree(x3,"GCD");
01947         return;
01948     }
01949     ia = 1; ib = 0; ic = 0; id = 1;
01950     u = ( ((ULONG)x1[na-1]) << BITSINWORD ) + x1[na-2];
01951     v = ( ((ULONG)x2[nb-1]) << BITSINWORD ) + x2[nb-2];
01952
01953     while ( v+ic != 0 && v+id != 0 &&
01954             ( q = (u+ia)/(v+ic) ) == (u+ib)/(v+id) ) {
01955         T = ia-q*ic; ia = ic; ic = T;
01956         T = ib-q*id; ib = id; id = T;
01957         T = u - q*v; u = v; v = T;
01958     }
01959     if ( ib == 0 ) goto toobad;
01960     Convert(ia,aa,naa);
01961     Convert(ib,bb,nbb);
01962     MulLong(x1,na,aa,naa,x3,&nd);
01963     MulLong(x2,nb,bb,nbb,c,nc);
01964     AddLong(x3,nd,c,*nc,c,nc);
01965     Convert(ic,aa,naa);
01966     Convert(id,bb,nbb);
01967     MulLong(x1,na,aa,naa,x3,&nd);
01968     t = c; na = j = *nc; r = x1;
01969     NCOPY(r,t,j);
01970     MulLong(x2,nb,bb,nbb,c,nc);
01971     AddLong(x3,nd,c,*nc,x2,&nb);
01972     }
01973 }
01974
01975 #endif
01976
01977 /*
01978     #] GCD :
01979     #[ GcdLong :          WORD GcdLong(a,na,b,nb,c,nc)
01980
01981     Returns the Greatest Common Divider of a and b in c.
01982     If a and or b are zero an error message will be returned.
01983     The answer is always positive.
01984     In principle a and c can be the same.
01985 */
01986
01987 #ifndef NEWTRICK
01988 /*
01989     #[ Old Routine :
01990 */
01991
01992 int GcdLong(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
01993 {
01994     GETBIDENTITY

```

```

01995     if ( !na || !nb ) {
01996         if ( !na && !nb ) {
01997             MLOCK(ErrorMessageLock);
01998             MesPrint("Cannot take gcd");
01999             MUNLOCK(ErrorMessageLock);
02000             return(-1);
02001         }
02002     }
02003     if ( !na ) {
02004         *nc = abs(nb);
02005         NCOPY(c,b,*nc);
02006         *nc = abs(nb);
02007         return(0);
02008     }
02009
02010     *nc = abs(na);
02011     NCOPY(c,a,*nc);
02012     *nc = abs(na);
02013     return(0);
02014 }
02015 if ( na < 0 ) na = -na;
02016 if ( nb < 0 ) nb = -nb;
02017 if ( na == 1 && nb == 1 ) {
02018 #ifdef EXTRAGCD2
02019     *c = (UWORD)GCD2((ULONG)*a,(ULONG)*b);
02020 #else
02021     UWORD x,y,z;
02022     x = *a;
02023     y = *b;
02024     do { z = x % y; x = y; } while ( ( y = z ) != 0 );
02025     *c = x;
02026 #endif
02027     *nc = 1;
02028 }
02029 else if ( na <= 2 && nb <= 2 ) {
02030     RLONG lx,ly,lz;
02031     if ( na == 2 ) { lx = ((RLONG)(a[1]))«BITSINWORD + *a; }
02032     else { lx = *a; }
02033     if ( nb == 2 ) { ly = ((RLONG)(b[1]))«BITSINWORD + *b; }
02034     else { ly = *b; }
02035 #ifdef LONGWORD
02036 #ifdef EXTRAGCD2
02037     lx = GCD2(lx,ly);
02038 #else
02039     do { lz = lx % ly; lx = ly; } while ( ( ly = lz ) != 0 );
02040 #endif
02041 #else
02042     if ( lx < ly ) { lz = lx; lx = ly; ly = lz; }
02043     do {
02044         lz = lx % ly; lx = ly;
02045     } while ( ( ly = lz ) != 0 && ( lx & AWORDMASK ) != 0 );
02046     if ( ly ) {
02047         do { *c = ((UWORD)lx)%((UWORD)ly); lx = ly; } while ( ( ly = *c ) != 0 );
02048         *c = (UWORD)lx;
02049         *nc = 1;
02050     }
02051     else
02052 #endif
02053     {
02054         *c++ = (UWORD)lx;
02055         if ( ( *c = (UWORD)(lx » BITSINWORD) ) != 0 ) *nc = 2;
02056         else *nc = 1;
02057     }
02058 }
02059 else {
02060 #ifdef EXTRAGCD
02061     GCD(a,na,b,nb,c,nc);
02062 #else
02063 #ifdef NEWGCD
02064     UWORD *x3,*x1,*x2, *GLscrat7, *GLscrat8;
02065     WORD n1,n2,n3,n4;
02066     WORD i, j;
02067     x1 = c; x3 = a; n1 = i = na;
02068     NCOPY(x1,x3,i);
02069     GLscrat7 = NumberMalloc("GcdLong"); GLscrat8 = NumberMalloc("GcdLong");
02070     x2 = GLscrat8; x3 = b; n2 = i = nb;
02071     NCOPY(x2,x3,i);
02072     x1 = c; i = 0;
02073     while ( x1[0] == 0 ) { i += BITSINWORD; x1++; n1--; }
02074     while ( ( x1[0] & 1 ) == 0 ) { i++; SCHUIF(x1,n1) }
02075     x2 = GLscrat8; j = 0;
02076     while ( x2[0] == 0 ) { j += BITSINWORD; x2++; n2--; }
02077     while ( ( x2[0] & 1 ) == 0 ) { j++; SCHUIF(x2,n2) }
02078     if ( j > i ) j = i; /* powers of two in GCD */
02079     for(;;){
02080         if ( n1 > n2 ) {
02081 firstbig:

```

```

02082         SubPLon(x1,n1,x2,n2,x1,&n3);
02083         n1 = n3;
02084         if ( n1 == 0 ) {
02085             x1 = c;
02086             n1 = i = n2; NCOPY(x1,x2,i);
02087             break;
02088         }
02089         while ( ( x1[0] & 1 ) == 0 ) SCHUIF(x1,n1)
02090         if ( n1 == 1 ) {
02091             if ( DivLong(x2,n2,x1,n1,GLscrat7,&n3,x2,&n4) ) goto GcdErr;
02092             n2 = n4;
02093             if ( n2 == 0 ) {
02094                 i = n1; x2 = c; NCOPY(x2,x1,i);
02095                 break;
02096             }
02097 #ifdef EXTRAGCD2
02098             *c = (UWORD)GCD2((ULONG)x1[0],(ULONG)x2[0]);
02099 #else
02100             {
02101                 UWORD x,y,z;
02102                 x = x1[0];
02103                 y = x2[0];
02104                 do { z = x % y; x = y; } while ( ( y = z ) != 0 );
02105                 *c = x;
02106             }
02107 #endif
02108             n1 = 1;
02109             break;
02110         }
02111     }
02112     else if ( n1 < n2 ) {
02113 lastbig:
02114         SubPLon(x2,n2,x1,n1,x2,&n3);
02115         n2 = n3;
02116         if ( n2 == 0 ) {
02117             i = n1; x2 = c; NCOPY(x2,x1,i);
02118             break;
02119         }
02120         while ( ( x2[0] & 1 ) == 0 ) SCHUIF(x2,n2)
02121         if ( n2 == 1 ) {
02122             if ( DivLong(x1,n1,x2,n2,GLscrat7,&n3,x1,&n4) ) goto GcdErr;
02123             n1 = n4;
02124             if ( n1 == 0 ) {
02125                 x1 = c;
02126                 n1 = i = n2; NCOPY(x1,x2,i);
02127                 break;
02128             }
02129 #ifdef EXTRAGCD2
02130             *c = (UWORD)GCD2((ULONG)x2[0],(ULONG)x1[0]);
02131 #else
02132             {
02133                 UWORD x,y,z;
02134                 x = x2[0];
02135                 y = x1[0];
02136                 do { z = x % y; x = y; } while ( ( y = z ) != 0 );
02137                 *c = x;
02138             }
02139 #endif
02140             n1 = 1;
02141             break;
02142         }
02143     }
02144     else {
02145         for ( i = n1-1; i >= 0; i-- ) {
02146             if ( x1[i] > x2[i] ) goto firstbig;
02147             else if ( x1[i] < x2[i] ) goto lastbig;
02148         }
02149         i = n1; x2 = c; NCOPY(x2,x1,i);
02150         break;
02151     }
02152 }
02153 /*
02154 Now the GCD is in c but still needs j powers of 2.
02155 */
02156 x1 = c;
02157 while ( j >= BITSINWORD ) {
02158     for ( i = n1; i > 0; i-- ) x1[i] = x1[i-1];
02159     x1[0] = 0; n1++;
02160     j -= BITSINWORD;
02161 }
02162 if ( j > 0 ) {
02163     ULONG a1,a2 = 0;
02164     for ( i = 0; i < n1; i++ ) {
02165         a1 = x1[i]; a1 <= j;
02166         a2 += a1;
02167         x1[i] = a2;
02168         a2 >= BITSINWORD;

```



```

02169         }
02170         if ( a2 != 0 ) {
02171             x1[n1++] = a2;
02172         }
02173     }
02174     *nc = n1;
02175     NumberFree(GLscrat7,"GcdLong"); NumberFree(GLscrat8,"GcdLong");
02176 #else
02177     UWORD *x1,*x2,*x3,*x4,*c1,*c2;
02178     WORD n1,n2,n3,n4,i;
02179     x1 = c; x3 = a; n1 = i = na;
02180     NCOPY(x1,x3,i);
02181     x1 = c; c1 = x2 = NumberMalloc("GcdLong"); x3 = NumberMalloc("GcdLong"); x4 =
NumberMalloc("GcdLong");
02182     c2 = b; n2 = i = nb;
02183     NCOPY(c1,c2,i);
02184     for(;;){
02185         if ( DivLong(x1,n1,x2,n2,x4,&n4,x3,&n3) ) goto GcdErr;
02186         if ( !n3 ) { x1 = x2; n1 = n2; break; }
02187         if ( DivLong(x2,n2,x3,n3,x4,&n4,x1,&n1) ) goto GcdErr;
02188         if ( !n1 ) { x1 = x3; n1 = n3; break; }
02189         if ( DivLong(x3,n3,x1,n1,x4,&n4,x2,&n2) ) goto GcdErr;
02190         if ( !n2 ) {
02191             *nc = n1;
02192             NumberFree(x2,"GcdLong"); NumberFree(x3,"GcdLong"); NumberFree(x4,"GcdLong");
02193             return(0);
02194         }
02195     }
02196     *nc = i = n1;
02197     NCOPY(c,x1,i);
02198     NumberFree(x2,"GcdLong"); NumberFree(x3,"GcdLong"); NumberFree(x4,"GcdLong");
02199 #endif
02200 #endif
02201     }
02202     return(0);
02203 GcdErr:
02204     MLOCK(ErrorMessageLock);
02205     MesCall("GcdLong");
02206     MUNLOCK(ErrorMessageLock);
02207     SETERROR(-1)
02208 }
02209 /*
02210 #] Old Routine :
02211 */
02212 #else
02213 /*
02214 New routine for GcdLong that uses smart shortcuts.
02215 Algorithm by J. Vermaseren 15-nov-2006.
02216 It runs faster for very big numbers but only by a fixed factor.
02217 There is no improvement in the power behaviour.
02218 Improvement on the whole of hf9 (multiple zeta values at weight 9):
02219 Better than a factor 2 on a 32 bits architecture and 2.76 on a
02220 64 bits architecture.
02221 On hf10 (MZV's at weight 10), 64 bits architecture: factor 7.
02222
02223 If we have two long numbers (na,nb > GCDMAX) we will work in a
02224 truncated way. At the moment of writing (15-nov-2006) it isn't
02225 clear whether this algorithm is an invention or a reinvention.
02226 A short search on the web didn't show anything.
02227
02228 31-jul-2007:
02229 A better search shows that this is an adaptation of the Lehmer-Euclid
02230 algorithm, already described in Knuth. Here we can work without upper
02231 and lower limit because we are only interested in the GCD, not the
02232 extra numbers. Also it takes already some features of the double
02233 digit Lehmer-Euclid algorithm of Jebelean it seems.
02234
02235 Maybe this can be programmed slightly better and we can get another
02236 few percent speed increase. Further improvements for the asymptotic
02237 case come from splitting the calculation as in Karatsuba and working
02238 with FFT divisions and multiplications etc. But this is when hundreds
02239 of words are involved at the least.
02240
02241 Algorithm
02242
02243 1: while ( na > nb || nb < GCDMAX ) {
02244     if ( nb == 0 ) { result in a }
02245     c = a % b;
02246     a = b;
02247     b = c;
02248 }
02249
02250 2: Make the truncated values in which a and b are the combinations
02251 of the top two words of a and b. The whole numbers are aa and bb now.
02252 3: ma1 = 1; ma2 = 0; mb1 = 0; mb2 = 1;
02253 4: A = a; B = b; m = a/b; c = a - m*b;
02254     c = ma1*a+ma2*b-m*(mb1*a+mb2*b) = (ma1-m*mb1)*a+(ma2-m*mb2)*b

```

```

02255     mc1 = ma1-m*mb1; mc2 = ma2-m*mb2;
02256 5: a = b; ma1 = mb1; ma2 = mb2;
02257   b = c; mb1 = mc1; mb2 = mc2;
02258 6: if ( b != 0 && nb >= FULLMAX ) goto 4;
02259 7: Now construct the new quantities
02260     ma1*aa+ma2*bb and mb1*aa+mb2*bb
02261 8: goto 1;
02262
02263 The essence of the above algorithm is that we do the divisions only
02264 on relatively short numbers. Also usually there are many steps 4&5
02265 for each step 7. This eliminates many operations.
02266 The termination at FULLMAX is that we make errors by not considering
02267 the tail of the number. If we run b down all the way, the errors combine
02268 in such a way that the new numbers may be of the same order as the old
02269 numbers. By stopping halfway we don't get the error beyond halfway
02270 either. Unfortunately this means that a >= FULLMAX and hence na > nb
02271 which means that next we will have a complete division. But just once.
02272 Running the steps 4-6 till a < FULLMAX runs already into problems.
02273 It may be necessary to experiment a bit to obtain the optimum value
02274 of GCDMAX.
02275 */
02276
02277 int GcdLong(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
02278 {
02279     GETBIDENTITY
02280     UWORD x,y,z;
02281     UWORD *x1,*x2,*x3,*x4,*x5,*d;
02282     UWORD *GLscrat6, *GLscrat7, *GLscrat8, *GLscrat9, *GLscrat10;
02283     WORD n1,n2,n3,n4,n5,i;
02284     RLONG lx,ly,lz;
02285     LONG ma1, ma2, mb1, mb2, mc1, mc2, m;
02286     if ( !na || !nb ) {
02287         if ( !na && !nb ) {
02288             MLOCK(ErrorMessageLock);
02289             MesPrint("Cannot take gcd");
02290             MUNLOCK(ErrorMessageLock);
02291             return(-1);
02292         }
02293
02294         if ( !na ) {
02295             *nc = abs(nb);
02296             NCOPY(c,b,*nc);
02297             *nc = abs(nb);
02298             return(0);
02299         }
02300
02301         *nc = abs(na);
02302         NCOPY(c,a,*nc);
02303         *nc = abs(na);
02304         return(0);
02305     }
02306     if ( na < 0 ) na = -na;
02307     if ( nb < 0 ) nb = -nb;
02308 /*
02309     # [ GMP stuff :
02310 */
02311 #ifdef WITHGMP
02312     if ( na > 3 && nb > 3 ) {
02313         int ii;
02314         mp_limb_t *upa, *upb, *upc, xx;
02315         UWORD *uw, *u1, *u2;
02316         unsigned int tcounta, tcountb, tcountal, tcountbl;
02317         mp_size_t ana, anb, anc;
02318
02319         u1 = uw = NumberMalloc("GcdLong");
02320         upa = (mp_limb_t *)u1;
02321         ana = na; tcountal = 0;
02322         while ( a[0] == 0 ) { a++; ana--; tcountal++; }
02323         for ( ii = 0; ii < ana; ii++ ) { *uw++ = *a++; }
02324         if ( ( ana & 1 ) != 0 ) { *uw = 0; ana++; }
02325         ana /= 2;
02326
02327         u2 = uw = NumberMalloc("GcdLong");
02328         upb = (mp_limb_t *)u2;
02329         anb = nb; tcountbl = 0;
02330         while ( b[0] == 0 ) { b++; anb--; tcountbl++; }
02331         for ( ii = 0; ii < anb; ii++ ) { *uw++ = *b++; }
02332         if ( ( anb & 1 ) != 0 ) { *uw = 0; anb++; }
02333         anb /= 2;
02334
02335         xx = upa[0]; tcounta = 0;
02336         while ( ( xx & 15 ) == 0 ) { tcounta += 4; xx >>= 4; }
02337         while ( ( xx & 1 ) == 0 ) { tcounta += 1; xx >>= 1; }
02338         xx = upb[0]; tcountb = 0;
02339         while ( ( xx & 15 ) == 0 ) { tcountb += 4; xx >>= 4; }
02340         while ( ( xx & 1 ) == 0 ) { tcountb += 1; xx >>= 1; }
02341

```

```

02342     if ( tcounta ) {
02343         mpn_rshift(upa,upa,ana,tcounta);
02344         if ( upa[ana-1] == 0 ) ana--;
02345     }
02346     if ( tcountb ) {
02347         mpn_rshift(upb,upb,anb,tcountb);
02348         if ( upb[anb-1] == 0 ) anb--;
02349     }
02350
02351     upc = (mp_limb_t *) (NumberMalloc("GcdLong"));
02352     if ( ( ana > anb ) || ( ( ana == anb ) && ( upa[ana-1] >= upb[ana-1] ) ) ) {
02353         anc = mpn_gcd(upc,upa,ana,upb,anb);
02354     }
02355     else {
02356         anc = mpn_gcd(upc,upb,anb,upa,ana);
02357     }
02358
02359     tcounta = tcounta*BITSINWORD + tcounta;
02360     tcountb = tcountb*BITSINWORD + tcountb;
02361     if ( tcountb > tcounta ) tcountb = tcounta;
02362     tcounta = tcountb/BITSINWORD;
02363     tcountb = tcountb%BITSINWORD;
02364
02365     if ( tcountb ) {
02366         xx = mpn_lshift(upc,upc,anc,tcountb);
02367         if ( xx ) { upc[anc] = xx; anc++; }
02368     }
02369
02370     uw = (UWORD *)upc; anc *= 2;
02371     while ( uw[anc-1] == 0 ) anc--;
02372     for ( ii = 0; ii < (int)tcounta; ii++ ) *c++ = 0;
02373     for ( ii = 0; ii < anc; ii++ ) *c++ = *uw++;
02374     *nc = anc + tcounta;
02375     NumberFree(u1,"GcdLong"); NumberFree(u2,"GcdLong"); NumberFree((UWORD *) (upc),"GcdLong");
02376     return(0);
02377 }
02378 #endif
02379 /*
02380 #] GMP stuff :
02381 */
02382 /*
02383 #[ Easy cases :
02384 */
02385     if ( na == 1 && nb == 1 ) {
02386         x = *a;
02387         y = *b;
02388         do { z = x % y; x = y; } while ( ( y = z ) != 0 );
02389         *c = x;
02390         *nc = 1;
02391         return(0);
02392     }
02393     else if ( na <= 2 && nb <= 2 ) {
02394         if ( na == 2 ) { lx = ((RLONG) (a[1]))«BITSINWORD + *a; }
02395         else { lx = *a; }
02396         if ( nb == 2 ) { ly = ((RLONG) (b[1]))«BITSINWORD + *b; }
02397         else { ly = *b; }
02398         if ( lx < ly ) { lz = lx; lx = ly; ly = lz; }
02399     #if ( BITSINWORD == 16 )
02400         do {
02401             lz = lx % ly; lx = ly;
02402         } while ( ( ly = lz ) != 0 );
02403     #else
02404         do {
02405             lz = lx % ly; lx = ly;
02406         } while ( ( ly = lz ) != 0 && ( lx & AWORDMASK ) != 0 );
02407         if ( ly ) {
02408             x = (UWORD)lx; y = (UWORD)ly;
02409             do { *c = x % y; x = y; } while ( ( y = *c ) != 0 );
02410             *c = x;
02411             *nc = 1;
02412         }
02413         else
02414     #endif
02415     {
02416         *c++ = (UWORD)lx;
02417         if ( ( *c = (UWORD) (lx » BITSINWORD) ) != 0 ) *nc = 2;
02418         else *nc = 1;
02419     }
02420     return(0);
02421 }
02422 /*
02423 #] Easy cases :
02424 */
02425     GLscrat6 = NumberMalloc("GcdLong"); GLscrat7 = NumberMalloc("GcdLong");
02426     GLscrat8 = NumberMalloc("GcdLong");
02427     GLscrat9 = NumberMalloc("GcdLong"); GLscrat10 = NumberMalloc("GcdLong");
02428     restart;;

```

```

02429 /*
02430      #] Easy cases :
02431 */
02432     if ( na == 1 && nb == 1 ) {
02433         x = *a;
02434         y = *b;
02435         do { z = x % y; x = y; } while ( ( y = z ) != 0 );
02436         *c = x;
02437         *nc = 1;
02438     }
02439     else if ( na <= 2 && nb <= 2 ) {
02440         if ( na == 2 ) { lx = ((RLONG) (a[1]))«BITSINWORD) + *a; }
02441         else { lx = *a; }
02442         if ( nb == 2 ) { ly = ((RLONG) (b[1]))«BITSINWORD) + *b; }
02443         else { ly = *b; }
02444         if ( lx < ly ) { lz = lx; lx = ly; ly = lz; }
02445     #if ( BITSINWORD == 16 )
02446         do {
02447             lz = lx % ly; lx = ly;
02448         } while ( ( ly = lz ) != 0 );
02449     #else
02450         do {
02451             lz = lx % ly; lx = ly;
02452         } while ( ( ly = lz ) != 0 && ( lx & AWORDMASK ) != 0 );
02453         if ( ly ) {
02454             x = (UWORD)lx; y = (UWORD)ly;
02455             do { *c = x % y; x = y; } while ( ( y = *c ) != 0 );
02456             *c = x;
02457             *nc = 1;
02458         }
02459         else
02460     #endif
02461     {
02462         *c++ = (UWORD)lx;
02463         if ( ( *c = (UWORD) (lx » BITSINWORD) ) != 0 ) *nc = 2;
02464         else *nc = 1;
02465     }
02466 }
02467 /*
02468      #] Easy cases :
02469      #] Original code :
02470 */
02471     else if ( na < GCDMAX || nb < GCDMAX || na != nb ) {
02472         if ( na < nb ) {
02473             x2 = GLscrat8; x3 = a; n2 = i = na;
02474             NCOPY(x2,x3,i);
02475             x1 = c; x3 = b; n1 = i = nb;
02476             NCOPY(x1,x3,i);
02477         }
02478         else {
02479             x1 = c; x3 = a; n1 = i = na;
02480             NCOPY(x1,x3,i);
02481             x2 = GLscrat8; x3 = b; n2 = i = nb;
02482             NCOPY(x2,x3,i);
02483         }
02484         x1 = c; x2 = GLscrat8; x3 = GLscrat7; x4 = GLscrat6;
02485         for(;;){
02486             if ( DivLong(x1,n1,x2,n2,x4,&n4,x3,&n3) ) goto GcdErr;
02487             if ( !n3 ) { x1 = x2; n1 = n2; break; }
02488             if ( n2 <= 2 ) { a = x2; b = x3; na = n2; nb = n3; goto restart; }
02489             if ( n3 >= GCDMAX && n2 == n3 ) {
02490                 a = GLscrat9; b = GLscrat10; na = n2; nb = n3;
02491                 for ( i = 0; i < na; i++ ) a[i] = x2[i];
02492                 for ( i = 0; i < nb; i++ ) b[i] = x3[i];
02493                 goto newtrick;
02494             }
02495             if ( DivLong(x2,n2,x3,n3,x4,&n4,x1,&n1) ) goto GcdErr;
02496             if ( !n1 ) { x1 = x3; n1 = n3; break; }
02497             if ( n3 <= 2 ) { a = x3; b = x1; na = n3; nb = n1; goto restart; }
02498             if ( n1 >= GCDMAX && n1 == n3 ) {
02499                 a = GLscrat9; b = GLscrat10; na = n3; nb = n1;
02500                 for ( i = 0; i < na; i++ ) a[i] = x3[i];
02501                 for ( i = 0; i < nb; i++ ) b[i] = x1[i];
02502                 goto newtrick;
02503             }
02504             if ( DivLong(x3,n3,x1,n1,x4,&n4,x2,&n2) ) goto GcdErr;
02505             if ( !n2 ) { *nc = n1; goto normalend; }
02506             if ( n1 <= 2 ) { a = x1; b = x2; na = n1; nb = n2; goto restart; }
02507             if ( n2 >= GCDMAX && n2 == n1 ) {
02508                 a = GLscrat9; b = GLscrat10; na = n1; nb = n2;
02509                 for ( i = 0; i < na; i++ ) a[i] = x1[i];
02510                 for ( i = 0; i < nb; i++ ) b[i] = x2[i];
02511                 goto newtrick;
02512             }
02513         }
02514         *nc = i = n1;
02515         NCOPY(c,x1,i);

```

```

02516     }
02517 /*
02518     #] Original code :
02519     #[ New code :
02520 */
02521     else {
02522 /*
02523         This is the new algorithm starting at step 3.
02524
02525         3: ma1 = 1; ma2 = 0; mb1 = 0; mb2 = 1;
02526         4: A = a; B = b; m = a/b; c = a - m*b;
02527           c = ma1*a+ma2*b-m*(mb1*a+mb2*b) = (ma1-m*mb1)*a+(ma2-m*mb2)*b
02528           mc1 = ma1-m*mb1; mc2 = ma2-m*mb2;
02529         5: a = b; ma1 = mb1; ma2 = mb2;
02530           b = c; mb1 = mc1; mb2 = mc2;
02531         6: if ( b != 0 ) goto 4;
02532 */
02533 newtrick;;
02534     ma1 = 1; ma2 = 0; mb1 = 0; mb2 = 1;
02535     lx = ((RLONG)(a[na-1]))«BITSINWORD + a[na-2];
02536     ly = ((RLONG)(b[nb-1]))«BITSINWORD + b[nb-2];
02537     if ( ly > lx ) { lz = lx; lx = ly; ly = lz; d = a; a = b; b = d; }
02538     do {
02539         m = lx/ly;
02540         mc1 = ma1-m*mb1; mc2 = ma2-m*mb2;
02541         ma1 = mb1; ma2 = mb2; mb1 = mc1; mb2 = mc2;
02542         lz = lx - m*ly; lx = ly; ly = lz;
02543     } while ( ly >= FULLMAX );
02544 /*
02545     Next the construction of the two new numbers
02546
02547     7: Now construct the new quantities
02548        a = ma1*aa+ma2*bb and b = mb1*aa+mb2*bb
02549 */
02550     x1 = GLscrat6;
02551     x2 = GLscrat7;
02552     x3 = GLscrat8;
02553     x5 = GLscrat10;
02554     if ( ma1 < 0 ) {
02555         ma1 = -ma1;
02556         x1[0] = (UWORD)ma1;
02557         x1[1] = (UWORD)(ma1 » BITSINWORD);
02558         if ( x1[1] ) n1 = -2;
02559         else n1 = -1;
02560     }
02561     else {
02562         x1[0] = (UWORD)ma1;
02563         x1[1] = (UWORD)(ma1 » BITSINWORD);
02564         if ( x1[1] ) n1 = 2;
02565         else n1 = 1;
02566     }
02567     if ( MulLong(a,na,x1,n1,x2,&n2) ) goto GcdErr;
02568     if ( ma2 < 0 ) {
02569         ma2 = -ma2;
02570         x1[0] = (UWORD)ma2;
02571         x1[1] = (UWORD)(ma2 » BITSINWORD);
02572         if ( x1[1] ) n1 = -2;
02573         else n1 = -1;
02574     }
02575     else {
02576         x1[0] = (UWORD)ma2;
02577         x1[1] = (UWORD)(ma2 » BITSINWORD);
02578         if ( x1[1] ) n1 = 2;
02579         else n1 = 1;
02580     }
02581     if ( MulLong(b,nb,x1,n1,x3,&n3) ) goto GcdErr;
02582     if ( AddLong(x2,n2,x3,n3,c,&n4) ) goto GcdErr;
02583     if ( mb1 < 0 ) {
02584         mb1 = -mb1;
02585         x1[0] = (UWORD)mb1;
02586         x1[1] = (UWORD)(mb1 » BITSINWORD);
02587         if ( x1[1] ) n1 = -2;
02588         else n1 = -1;
02589     }
02590     else {
02591         x1[0] = (UWORD)mb1;
02592         x1[1] = (UWORD)(mb1 » BITSINWORD);
02593         if ( x1[1] ) n1 = 2;
02594         else n1 = 1;
02595     }
02596     if ( MulLong(a,na,x1,n1,x2,&n2) ) goto GcdErr;
02597     if ( mb2 < 0 ) {
02598         mb2 = -mb2;
02599         x1[0] = (UWORD)mb2;
02600         x1[1] = (UWORD)(mb2 » BITSINWORD);
02601         if ( x1[1] ) n1 = -2;
02602         else n1 = -1;

```

```

02603     }
02604     else {
02605         x1[0] = (UWORD)mb2;
02606         x1[1] = (UWORD)(mb2 » BITSINWORD);
02607         if ( x1[1] ) n1 = 2;
02608         else      n1 = 1;
02609     }
02610     if ( MulLong(b,nb,x1,n1,x3,&n3) ) goto GcdErr;
02611     if ( AddLong(x2,n2,x3,n3,x5,&n5) ) goto GcdErr;
02612     a = c; na = n4; b = x5; nb = n5;
02613     if ( nb == 0 ) { *nc = n4; goto normalend; }
02614     x4 = GLscrat9;
02615     for ( i = 0; i < na; i++ ) x4[i] = a[i];
02616     a = x4;
02617     if ( na < 0 ) na = -na;
02618     if ( nb < 0 ) nb = -nb;
02619     /*
02620     The typical case now is that in a we have the last step to go
02621     to loose the leading word, while in b we have lost the leading word.
02622     We could go to DivLong now but we can also add an extra step that
02623     is less wasteful.
02624     In the case that the new leading word of b is extrememly short (like 1)
02625     we make a rather large error of course. In the worst case the whole
02626     will be intercepted by DivLong after all, but that is so rare that
02627     it shouldn't influence any timing in a measurable way.
02628     */
02629     if ( nb >= GCDMAX && na == nb+1 && b[nb-1] >= HALFMAX && b[nb-1] > a[na-1] ) {
02630         lx = (((RLONG)(a[na-1]))«BITSINWORD) + a[na-2];
02631         x1[0] = lx/b[nb-1]; n1 = 1;
02632         MulLong(b,nb,x1,n1,x2,&n2);
02633         n2 = -n2;
02634         AddLong(a,na,x2,n2,x4,&n4);
02635         if ( n4 == 0 ) {
02636             *nc = nb;
02637             for ( i = 0; i < nb; i++ ) c[i] = b[i];
02638             goto normalend;
02639         }
02640         if ( n4 < 0 ) n4 = -n4;
02641         a = b; na = nb; b = x4; nb = n4;
02642     }
02643     goto restart;
02644     /*
02645     #] New code :
02646     */
02647     }
02648 normalend:
02649     NumberFree(GLscrat6,"GcdLong"); NumberFree(GLscrat7,"GcdLong"); NumberFree(GLscrat8,"GcdLong");
02650     NumberFree(GLscrat9,"GcdLong"); NumberFree(GLscrat10,"GcdLong");
02651     return(0);
02652 GcdErr:
02653     MLOCK(ErrorMessageLock);
02654     MesCall("GcdLong");
02655     MUNLOCK(ErrorMessageLock);
02656     NumberFree(GLscrat6,"GcdLong"); NumberFree(GLscrat7,"GcdLong"); NumberFree(GLscrat8,"GcdLong");
02657     NumberFree(GLscrat9,"GcdLong"); NumberFree(GLscrat10,"GcdLong");
02658     SETERROR(-1)
02659 }
02660
02661 #endif
02662
02663 /*
02664     #] GcdLong :
02665     #[ GetBinom :      WORD GetBinom(a,na,i1,i2)
02666     */
02667
02668 int GetBinom(UWORD *a, WORD *na, WORD i1, WORD i2)
02669 {
02670     GETIDENTITY
02671     WORD j, k, l;
02672     UWORD *GBscrat3, *GBscrat4;
02673     if ( i1-i2 < i2 ) i2 = i1-i2;
02674     if ( i2 == 0 ) { *a = 1; *na = 1; return(0); }
02675     if ( i2 > i1 ) { *a = 0; *na = 0; return(0); }
02676     *a = i1; *na = 1;
02677     GBscrat3 = NumberMalloc("GetBinom"); GBscrat4 = NumberMalloc("GetBinom");
02678     for ( j = 2; j <= i2; j++ ) {
02679         GBscrat3[0] = i1+1-j;
02680         if ( MulLong(a,*na,GBscrat3,(WORD)1,GBscrat4,&k) ) goto CalledFrom;
02681         GBscrat3[0] = j;
02682         if ( DivLong(GBscrat4,k,GBscrat3,(WORD)1,a,na,GBscrat3,&l) ) goto CalledFrom;
02683     }
02684     NumberFree(GBscrat3,"GetBinom"); NumberFree(GBscrat4,"GetBinom");
02685     return(0);
02686 CalledFrom:
02687     MLOCK(ErrorMessageLock);
02688     MesCall("GetBinom");
02689     MUNLOCK(ErrorMessageLock);

```

```

02690     NumberFree(GBscrat3,"GetBinom"); NumberFree(GBscrat4,"GetBinom");
02691     SETERROR(-1)
02692 }
02693
02694 /*
02695     #] GetBinom :
02696     #[ LcmLong :      WORD LcmLong(a,na,b,nb)
02697
02698     Computes the LCM of the long numbers a and b and puts the result
02699     in c. c is allowed to be equal to a.
02700 */
02701
02702 int LcmLong(PHEAD UWORD *a, WORD na, UWORD *b, WORD nb, UWORD *c, WORD *nc)
02703 {
02704     int error = 0;
02705     UWORD *d = NumberMalloc("LcmLong");
02706     UWORD *e = NumberMalloc("LcmLong");
02707     UWORD *f = NumberMalloc("LcmLong");
02708     WORD nd, ne, nf;
02709     GcdLong(BHEAD a, na, b, nb, d, &nd);
02710     DivLong(a,na,d,nd,e,&ne,f,&nf);
02711     if ( MulLong(b,nb,e,ne,c,nc) ) {
02712         MLOCK(ErrorMessageLock);
02713         MesCall("LcmLong");
02714         MUNLOCK(ErrorMessageLock);
02715         error = -1;
02716     }
02717     NumberFree(f,"LcmLong");
02718     NumberFree(e,"LcmLong");
02719     NumberFree(d,"LcmLong");
02720     return(error);
02721 }
02722
02723 /*
02724     #] LcmLong :
02725     #[ TakeLongRoot:   int TakeLongRoot(a,n,power)
02726
02727     Takes the 'power'-root of the long number in a.
02728     If the root could be taken the return value is zero.
02729     If the root could not be taken, the return value is 1.
02730     The root will be in a if it could be taken, otherwise there will be garbage
02731     Algorithm: (assume b is guess of root, b' better guess)
02732         b' = (a-(power-1)*b^power)/(n*b^(power-1))
02733     Note: power should be positive!
02734 */
02735
02736 int TakeLongRoot(UWORD *a, WORD *n, WORD power)
02737 {
02738     GETIDENTITY
02739     int numbits, guessbits, i, retval = 0;
02740     UWORD x, *b, *c, *d, *e;
02741     WORD na, nb, nc, nd, ne;
02742     if ( *n < 0 && ( power & 1 ) == 0 ) return(1);
02743     if ( power == 1 ) return(0);
02744     if ( *n < 0 ) { na = -*n; }
02745     else { na = *n; }
02746     if ( na == 1 ) {
02747         /* Special cases that are the most frequent */
02748         if ( a[0] == 1 ) return(0);
02749         if ( power < BITSINWORD && na == 1 && a[0] == (UWORD)(1<<power) ) {
02750             a[0] = 2; return(0);
02751         }
02752         if ( 2*power < BITSINWORD && na == 1 && a[0] == (UWORD)(1<<(2*power)) ) {
02753             a[0] = 4; return(0);
02754         }
02755     }
02756     /*
02757     Step 1: make a guess. We count the number of bits.
02758     numbits will be the 1+2log(a)
02759     */
02760     numbits = BITSINWORD*(na-1);
02761     x = a[na-1];
02762     while ( ( x >> 8 ) != 0 ) { numbits += 8; x >>= 8; }
02763     if ( ( x >> 4 ) != 0 ) { numbits += 4; x >>= 4; }
02764     if ( ( x >> 2 ) != 0 ) { numbits += 2; x >>= 2; }
02765     if ( ( x >> 1 ) != 0 ) numbits++;
02766     guessbits = numbits / power;
02767     if ( guessbits <= 0 ) return(1); /* root < 2 and 1 we did already */
02768     nb = guessbits/BITSINWORD;
02769     /*
02770     The recursion is:
02771     (b'-b) = (a/b^(power-1)-b)/n
02772             = (a/c-b)/n
02773             = (d-b)/n    (remainder of a/c is e)
02774             = c/n    (we reuse the scratch array c)
02775     Termination can be tricky. When a/c has no remainder and = b we have a root.
02776     When d = b but the remainder of a/c != 0, there is definitely no root.

```

```

02777 */
02778 b = NumberMalloc("TakeLongRoot"); c = NumberMalloc("TakeLongRoot");
02779 d = NumberMalloc("TakeLongRoot"); e = NumberMalloc("TakeLongRoot");
02780 for ( i = 0; i < nb; i++ ) { b[i] = 0; }
02781 b[nb] = 1 << (guessbits%BITSINWORD);
02782 nb++;
02783 for(;;) {
02784     nc = nb;
02785     for ( i = 0; i < nb; i++ ) c[i] = b[i];
02786     if ( RaisPow(BHEAD c,&nc,power-1) ) goto TLcall;
02787     if ( DivLong(a,na,c,nc,d,&nd,e,&ne) ) goto TLcall;
02788     nb = -nb;
02789     if ( AddLong(d,nd,b,nb,c,&nc) ) goto TLcall;
02790     nb = -nb;
02791     if ( nc == 0 ) {
02792         if ( ne == 0 ) break;
02793         retval = 1; break;
02794     /*
02795         else {
02796             NumberFree(b,"TakeLongRoot"); NumberFree(c,"TakeLongRoot");
02797             NumberFree(d,"TakeLongRoot"); NumberFree(e,"TakeLongRoot");
02798             return(1);
02799         }
02800     */
02801     }
02802     DivLong(c,nc,(UWORD *)(&power),1,d,&nd,e,&ne);
02803     if ( nd == 0 ) {
02804         retval = 1;
02805         break;
02806     /*
02807         NumberFree(b,"TakeLongRoot"); NumberFree(c,"TakeLongRoot");
02808         NumberFree(d,"TakeLongRoot"); NumberFree(e,"TakeLongRoot");
02809         return(1);
02810     */
02811     /*
02812         This code tries b+1 as a final possibility.
02813         We believe this is not needed
02814         UWORD one = 1;
02815         if ( AddLong(b,nb,&one,1,c,&nc) ) goto TLcall;
02816         if ( RaisPow(BHEAD c,&nc,power-1) ) goto TLcall;
02817         if ( DivLong(a,na,c,nc,d,&nd,e,&ne) ) goto TLcall;
02818         if ( ne != 0 ) return(1);
02819         nb = -nb;
02820         if ( SubLong(d,nd,b,nb,c,&nc) ) goto TLcall;
02821         nb = -nb;
02822         if ( nc != 0 ) {
02823             NumberFree(b,"TakeLongRoot"); NumberFree(c,"TakeLongRoot");
02824             NumberFree(d,"TakeLongRoot"); NumberFree(e,"TakeLongRoot");
02825             return(1);
02826         }
02827         break;
02828     */
02829     }
02830     if ( AddLong(b,nb,d,nd,b,&nb) ) goto TLcall;
02831 }
02832 for ( i = 0; i < nb; i++ ) a[i] = b[i];
02833 if ( *n < 0 ) *n = -nb;
02834 else *n = nb;
02835 NumberFree(b,"TakeLongRoot"); NumberFree(c,"TakeLongRoot");
02836 NumberFree(d,"TakeLongRoot"); NumberFree(e,"TakeLongRoot");
02837 return(retval);
02838 TLcall:
02839 MLOCK(ErrorMessageLock);
02840 MesCall("TakeLongRoot");
02841 MUNLOCK(ErrorMessageLock);
02842 NumberFree(b,"TakeLongRoot"); NumberFree(c,"TakeLongRoot");
02843 NumberFree(d,"TakeLongRoot"); NumberFree(e,"TakeLongRoot");
02844 Terminate(-1);
02845 return(-1);
02846 }
02847
02848 /*
02849     #] TakeLongRoot:
02850     #[ MakeRational:
02851
02852     Makes the integer a mod m into a traction b/c with |b|,|c| < sqrt(m)
02853     For the algorithm, see MakeLongRational.
02854 */
02855
02856 int MakeRational(WORD a,WORD m, WORD *b, WORD *c)
02857 {
02858     LONG x1,x2,x3,x4,y1,y2;
02859     if ( a < 0 ) { a = a+m; }
02860     if ( a <= 1 ) {
02861         if ( a > m/2 ) a = a-m;
02862         *b = a; *c = 1; return(0);
02863     }

```



```

02864     x1 = m; x2 = a;
02865     if ( x2*x2 >= m ) {
02866         y1 = x1/x2; y2 = x1%x2; x3 = 1; x4 = -y1; x1 = x2; x2 = y2;
02867         while ( x2*x2 >= m ) {
02868             y1 = x1/x2; y2 = x1%x2; x1 = x2; x2 = y2; y2 = x3-y1*x4; x3 = x4; x4 = y2;
02869         }
02870     }
02871     else x4 = 1;
02872     if ( x2 == 0 ) { return(1); }
02873     if ( x2 > m/2 ) *b = x2-m;
02874     else *b = x2;
02875     if ( x4 > m/2 ) { *c = x4-m; *c = -*c; *b = -*b; }
02876     else if ( x4 <= -m/2 ) { x4 += m; *c = x4; }
02877     else if ( x4 < 0 ) { x4 = -x4; *c = x4; *b = -*b; }
02878     else *c = x4;
02879     return(0);
02880 }
02881
02882 /*
02883     #] MakeRational:
02884     #[ MakeLongRational:
02885
02886     Converts the long number a mod m into the fraction b
02887     One of the properties of b is that num,den < sqrt(m)
02888     The algorithm: Start with:   m 0
02889                                a 1
02890     Make now c=m/a, c1=m/a      c c2=0-c1*1
02891     Make now d=a/c, d1=a/c      d d2=1-d1*c2
02892     Make now e=c/d, e1=c/d      e e2=1-e1*d2
02893     etc till in the first column we get a number < sqrt(m)
02894     We have then f,f2 and the fraction is f/f2.
02895     If at any moment we get a zero, m contained an unlucky prime.
02896
02897     Note that this can be made a lot faster when we make the same
02898     improvements as in the GCD routine. That is something for later.
02899 #ifndef WITHMAKERATIONAL
02900 */
02901
02902 #define COPYLONG(x1,nx1,x2,nx2) { int i; for(i=0;i<ABS(nx2);i++)x1[i]=x2[i];nx1=nx2; }
02903
02904 int MakeLongRational(PHEAD UWORD *a, WORD na, UWORD *m, WORD nm, UWORD *b, WORD *nb)
02905 {
02906     UWORD *root = NumberMalloc("MakeRational");
02907     UWORD *x1 = NumberMalloc("MakeRational");
02908     UWORD *x2 = NumberMalloc("MakeRational");
02909     UWORD *x3 = NumberMalloc("MakeRational");
02910     UWORD *x4 = NumberMalloc("MakeRational");
02911     UWORD *y1 = NumberMalloc("MakeRational");
02912     UWORD *y2 = NumberMalloc("MakeRational");
02913     WORD nroot,nx1,nx2,nx3,nx4,ny1,ny2 = 0,retval = 0;
02914     WORD sign = 1;
02915     /*
02916     Step 1: Take the square root of m
02917     */
02918     COPYLONG(root,nroot,m,nm)
02919     TakeLongRoot(root,&nroot,2);
02920     /*
02921     Step 2: Set the start values
02922     */
02923     if ( na < 0 ) { na = -na; sign = -sign; }
02924     COPYLONG(x1,nx1,m,nm)
02925     COPYLONG(x2,nx2,a,na)
02926     /*
02927     x3[0] = 0, nx3 = 0;
02928     x4[0] = 1, nx4 = 1;
02929     */
02930     /*
02931     The start operation needs some special attention because of the zero.
02932     */
02933     if ( BigLong(x2,nx2,root,nroot) <= 0 ) {
02934         x4[0] = 1, nx4 = 1;
02935         goto gottheanswer;
02936     }
02937     DivLong(x1,nx1,x2,nx2,y1,&ny1,y2,&ny2);
02938     if ( ny2 == 0 ) { retval = 1; goto cleanup; }
02939     COPYLONG(x1,nx1,x2,nx2)
02940     COPYLONG(x2,nx2,y2,ny2)
02941     x3[0] = 1; nx3 = 1;
02942     COPYLONG(x4,nx4,y1,ny1)
02943     nx4 = -nx4;
02944     /*
02945     Now the loop.
02946     */
02947     while ( BigLong(x2,nx2,root,nroot) > 0 ) {
02948         DivLong(x1,nx1,x2,nx2,y1,&ny1,y2,&ny2);
02949         if ( ny2 == 0 ) { retval = 1; goto cleanup; }
02950         COPYLONG(x1,nx1,x2,nx2)

```

```

02951     COPYLONG(x2,nx2,y2,ny2)
02952     MulLong(y1,ny1,x4,nx4,y2,&ny2);
02953     ny2 = -ny2;
02954     AddLong(x3,nx3,y2,ny2,y1,&ny1);
02955     COPYLONG(x3,nx3,x4,nx4)
02956     COPYLONG(x4,nx4,y1,ny1)
02957 }
02958 /*
02959     Now we have the answer. It is x2/x4. It has to be packed into b.
02960 */
02961 gottheanswer:
02962     if ( nx4 < 0 ) { sign = -sign; nx4 = -nx4; }
02963     COPYLONG(b,*nb,x2,nx2)
02964     Pack(b,nb,x4,nx4);
02965     if ( sign < 0 ) *nb = -*nb;
02966 cleanup:
02967     NumberFree(y2,"MakeRational");
02968     NumberFree(y1,"MakeRational");
02969     NumberFree(x4,"MakeRational");
02970     NumberFree(x3,"MakeRational");
02971     NumberFree(x2,"MakeRational");
02972     NumberFree(x1,"MakeRational");
02973     NumberFree(root,"MakeRational");
02974     return(retval);
02975 }
02976
02977 /*
02978 #endif
02979     #] MakeLongRational:
02980     #[ ChineseRemainder:
02981 */
02993 #ifdef WITHCHINESEREMAINDER
02994
02995 int ChineseRemainder(PHEAD MODNUM *a1, MODNUM *a2, MODNUM *a)
02996 {
02997     UWORD *inv1 = NumberMalloc("ChineseRemainder");
02998     UWORD *inv2 = NumberMalloc("ChineseRemainder");
02999     UWORD *fac1 = NumberMalloc("ChineseRemainder");
03000     UWORD *fac2 = NumberMalloc("ChineseRemainder");
03001     UWORD two[1];
03002     WORD ninv1, ninv2, nfac1, nfac2;
03003     if ( a1->na < 0 ) {
03004         AddLong(a1->a,a1->na,a1->m,a1->nm,a1->a,&(a1->na));
03005     }
03006     if ( a2->na < 0 ) {
03007         AddLong(a2->a,a2->na,a2->m,a2->nm,a2->a,&(a2->na));
03008     }
03009     MulLong(a1->m,a1->nm,a2->m,a2->nm,a->m,&(a->nm));
03010
03011     GetLongModInverses(BHEAD a1->m,a1->nm,a2->m,a2->nm,inv1,&ninv1,inv2,&ninv2);
03012     MulLong(inv1,ninv1,a1->m,a1->nm,fac1,&nfac1);
03013     MulLong(inv2,ninv2,a2->m,a2->nm,fac2,&nfac2);
03014
03015     MulLong(fac1,nfac1,a2->a,a2->na,inv1,&ninv1);
03016     MulLong(fac2,nfac2,a1->a,a1->na,inv2,&ninv2);
03017     AddLong(inv1,ninv1,inv2,ninv2,a->a,&(a->na));
03018
03019     two[0] = 2;
03020     MulLong(a->a,a->na,two,1,fac1,&nfac1);
03021     if ( BigLong(fac1,nfac1,a->m,a->nm) > 0 ) {
03022         a->nm = -a->nm;
03023         AddLong(a->a,a->na,a->m,a->nm,a->a,&(a->na));
03024         a->nm = -a->nm;
03025     }
03026     NumberFree(fac2,"ChineseRemainder");
03027     NumberFree(fac1,"ChineseRemainder");
03028     NumberFree(inv2,"ChineseRemainder");
03029     NumberFree(inv1,"ChineseRemainder");
03030     return(0);
03031 }
03032
03033 #endif
03034
03035 /*
03036     #] ChineseRemainder:
03037     #[ RekenLong :
03038     #[ RekenTerms :
03039     #[ CompCoef :      WORD CompCoef(term1,term2)
03040
03041     Compares the coefficients of term1 and term2 by subtracting them.
03042     This does more work than needed but this routine is only called
03043     when sorting functions and function arguments.
03044     (and comparing values
03045 */
03046 /* #define 64SAVE */
03047
03048 WORD CompCoef(WORD *term1, WORD *term2)

```

```

03049 {
03050     GETIDENTITY
03051     UWORD *c;
03052     WORD n1,n2,n3,*a;
03053     GETCOEF(term1,n1);
03054     GETCOEF(term2,n2);
03055     if ( term1[1] == 0 && n1 == 1 ) {
03056         if ( term2[1] == 0 && n2 == 1 ) return(0);
03057         if ( n2 < 0 ) return(1);
03058         return(-1);
03059     }
03060     else if ( term2[1] == 0 && n2 == 1 ) {
03061         if ( n1 < 0 ) return(-1);
03062         return(1);
03063     }
03064     if ( n1 > 0 ) {
03065         if ( n2 < 0 ) return(1);
03066     }
03067     else {
03068         if ( n2 > 0 ) return(-1);
03069         a = term1; term1 = term2; term2 = a;
03070         n3 = -n1; n1 = -n2; n2 = n3;
03071     }
03072     if ( term1[1] == 1 && term2[1] == 1 && n1 == 1 && n2 == 1 ) {
03073         if ( (UWORD)*term1 > (UWORD)*term2 ) return(1);
03074         else if ( (UWORD)*term1 < (UWORD)*term2 ) return(-1);
03075         else return(0);
03076     }
03077
03078     /*
03079     The next call should get dedicated code, as AddRat does more than
03080     strictly needed. Also more attention should be given to overflow.
03081     */
03082     c = NumberMalloc("CompCoef");
03083     if ( AddRat(BHEAD (UWORD *)term1,n1,(UWORD *)term2,-n2,c,&n3) ) {
03084         MLOCK(ErrorMessageLock);
03085         MesCall("CompCoef");
03086         MUNLOCK(ErrorMessageLock);
03087         NumberFree(c,"CompCoef");
03088         SETERROR(-1)
03089     }
03090     NumberFree(c,"CompCoef");
03091     return(n3);
03092 }
03093
03094 /*
03095     #] CompCoef :
03096     #[ Modulus :      WORD Modulus(term)
03097
03098     Routine takes the coefficient of term modulus b. The answer
03099     is in term again and the length of term is adjusted.
03100
03101     */
03102
03103 int Modulus(WORD *term)
03104 {
03105     WORD *t;
03106     WORD n1;
03107     t = term;
03108     GETCOEF(t,n1);
03109     if ( TakeModulus((UWORD *)t,&n1,AC.cmod,AC.ncmod,UNPACK) ) {
03110         MLOCK(ErrorMessageLock);
03111         MesCall("Modulus");
03112         MUNLOCK(ErrorMessageLock);
03113         SETERROR(-1)
03114     }
03115     if ( !n1 ) {
03116         *term = 0;
03117         return(0);
03118     }
03119     else if ( n1 > 0 ) {
03120         n1 *= 2;
03121         t += n1;          /* Note that n1 >= 0 */
03122         n1++;
03123     }
03124     else if ( n1 < 0 ) {
03125         n1 *= 2;
03126         t += -n1;
03127         n1--;
03128     }
03129     *t++ = n1;
03130     *term = WORDDIF(t,term);
03131     return(0);
03132 }
03133
03134 /*
03135     #] Modulus :

```

```

03136      # [ TakeModulus :      WORD TakeModulus(a,na,cmoVec,nmod,par)
03137
03138      Routine gets the rational number in a with reduced length na.
03139      It is called when AC.nmod != 0 and the number in AC.cmod is the
03140      number wrt which we need the modulus.
03141      The result is returned in a and na again.
03142
03143      If par == NOUNPACK we only do a single number, not a fraction.
03144      In addition we don't do fancy. We want a positive number and
03145      the input was supposed to be positive.
03146      We don't pack the result. The calling routine is responsible for that.
03147      This may not be a good idea. To be checked.
03148  */
03149
03150  int TakeModulus(UWORD *a, WORD *na, UWORD *cmoVec, WORD nmod, WORD par)
03151  {
03152      GETIDENTITY
03153      UWORD *c, *d, *e, *f, *g, *h;
03154      UWORD *x4,*x2;
03155      UWORD *x3,*x1,*x5,*x6,*x7,*x8;
03156      WORD y3,y1,y5,y6;
03157      WORD n1, i, y2, y4;
03158      WORD nh, tdenom, tnum, nmod;
03159      LONG x;
03160      if ( nmod == 0 ) return(0);          /* No modulus operation */
03161      nmod = ABS(nmod);
03162      n1 = *na;
03163      if ( ( par & UNPACK ) != 0 ) UnPack(a,n1,&tdenom,&tnum);
03164      else { tnum = n1; }
03165  /*
03166      We fish out the special case that the coefficient is short as well.
03167      There is no need to make lots of calls etc
03168  */
03169      if ( ( ( par & UNPACK ) == 0 ) && nmod == 1 && ( n1 == 1 || n1 == -1 ) ) {
03170          goto simplecase;
03171      }
03172      else if ( nmod == 1 && ( n1 == 1 || n1 == -1 ) ) {
03173          if ( a[1] != 1 ) {
03174              a[1] = a[1] % cmoVec[0];
03175              if ( a[1] == 0 ) {
03176                  MesPrint("Division by zero in short modulus arithmetic");
03177                  return(-1);
03178              }
03179              y1 = 0;
03180              if ( ( AC.modinverses != 0 ) && ( ( par & NOINVERSES ) == 0 ) ) {
03181                  y1 = AC.modinverses[a[1]];
03182              }
03183              else {
03184                  GetModInverses(a[1],cmoVec[0],&y1,&y2);
03185              }
03186              x = a[0];
03187              a[0] = (x*y1) % cmoVec[0];
03188              a[1] = 1;
03189          }
03190          else {
03191  simplecase:
03192              a[0] = a[0] % cmoVec[0];
03193          }
03194          if ( a[0] == 0 ) { *na = 0; return(0); }
03195          if ( ( AC.modmode & POSNEG ) != 0 ) {
03196              if ( a[0] > (UWORD)(cmoVec[0]/2) ) {
03197                  a[0] = cmoVec[0] - a[0];
03198                  *na = -*na;
03199              }
03200          }
03201          else if ( *na < 0 ) {
03202              *na = 1; a[0] = cmoVec[0] - a[0];
03203          }
03204          return(0);
03205      }
03206      c = NumberMalloc("TakeModulus"); d = NumberMalloc("TakeModulus"); e = NumberMalloc("TakeModulus");
03207      f = NumberMalloc("TakeModulus"); g = NumberMalloc("TakeModulus"); h = NumberMalloc("TakeModulus");
03208      n1 = ABS(n1);
03209      if ( DivLong(a,tnum,(UWORD *)cmoVec,nmod,
03210                  c,&nh,a,&tnum) ) goto ModErr;
03211      if ( tnum == 0 ) { *na = 0; goto normalreturn; }
03212      if ( ( par & UNPACK ) == 0 ) {
03213          if ( ( AC.modmode & POSNEG ) != 0 ) {
03214              NormalModulus(a,&tnum);
03215          }
03216          else if ( tnum < 0 ) {
03217              SubPLon((UWORD *)cmoVec,nmod,a,-tnum,a,&tnum);
03218          }
03219          *na = tnum;
03220          goto normalreturn;
03221      }
03222      if ( tdenom == 1 && a[n1] == 1 ) {

```

```

03223     if ( ( AC.modmode & POSNEG ) != 0 ) {
03224         NormalModulus(a,&tnumer);
03225     }
03226     else if ( tnumer < 0 ) {
03227         SubPLon((UWORD *)cmodvec,nmod,a,-tnumer,a,&tnumer);
03228     }
03229     *na = tnumer;
03230     i = ABS(tnumer);
03231     a += i;
03232     *a++ = 1;
03233     while ( --i > 0 ) *a++ = 0;
03234     goto normalreturn;
03235 }
03236 if ( DivLong(a+n1,tdenom,(UWORD *)cmodvec,nmod,c,&nh,a+n1,&tdenom) ) goto ModErr;
03237 if ( !tdenom ) {
03238     MLOCK(ErrorMessageLock);
03239     MesPrint("Division by zero in modulus arithmetic");
03240     if ( AP.DebugFlag ) {
03241         AO.OutSkip = 3;
03242         FiniLine();
03243         i = *na;
03244         if ( i < 0 ) i = -i;
03245         while ( --i >= 0 ) { TalToLine((UWORD)(*a++)); TokenToLine((UBYTE *)" "); }
03246         i = *na;
03247         if ( i < 0 ) i = -i;
03248         while ( --i >= 0 ) { TalToLine((UWORD)(*a++)); TokenToLine((UBYTE *)" "); }
03249         TalToLine((UWORD)(*na));
03250         AO.OutSkip = 0;
03251         FiniLine();
03252     }
03253     MUNLOCK(ErrorMessageLock);
03254     NumberFree(c,"TakeModulus"); NumberFree(d,"TakeModulus"); NumberFree(e,"TakeModulus");
03255     NumberFree(f,"TakeModulus"); NumberFree(g,"TakeModulus"); NumberFree(h,"TakeModulus");
03256     return(-1);
03257 }
03258 if ( ( AC.modinverses != 0 ) && ( ( par & NOINVERSES ) == 0 )
03259 && ( tdenom == 1 || tdenom == -1 ) ) {
03260     *d = AC.modinverses[a[n1]]; y1 = 1; y2 = tdenom;
03261     if ( MulLong(a,tnumer,d,y1,c,&y3) ) goto ModErr;
03262     if ( DivLong(c,y3,(UWORD *)cmodvec,nmod,d,&y5,a,&tdenom) ) goto ModErr;
03263     if ( y2 < 0 ) tdenom = -tdenom;
03264 }
03265 else {
03266     x2 = (UWORD *)cmodvec; x1 = c; i = nmod; while ( --i >= 0 ) *x1++ = *x2++;
03267     x1 = c; x2 = a+n1; x3 = d; x4 = e; x5 = f; x6 = g;
03268     y1 = nmod; y2 = tdenom; y4 = 0; y5 = 1; *x5 = 1;
03269     for(;;) {
03270         if ( DivLong(x1,y1,x2,y2,h,&nh,x3,&y3) ) goto ModErr;
03271         if ( MulLong(x5,y5,h,nh,x6,&y6) ) goto ModErr;
03272         if ( AddLong(x4,y4,x6,-y6,x6,&y6) ) goto ModErr;
03273         if ( !y3 ) {
03274             if ( y2 != 1 || *x2 != 1 ) {
03275                 MLOCK(ErrorMessageLock);
03276                 MesPrint("Inverse in modulus arithmetic doesn't exist");
03277                 MesPrint("Denominator and modulus are not relative prime");
03278                 MUNLOCK(ErrorMessageLock);
03279                 goto ModErr;
03280             }
03281             break;
03282         }
03283         x7 = x1; x1 = x2; y1 = y2; x2 = x3; y2 = y3; x3 = x7;
03284         x8 = x4; x4 = x5; y4 = y5; x5 = x6; y5 = y6; x6 = x8;
03285     }
03286     if ( y5 < 0 && AddLong((UWORD *)cmodvec,nmod,x5,y5,x5,&y5) ) goto ModErr;
03287     if ( MulLong(a,tnumer,x5,y5,c,&y3) ) goto ModErr;
03288     if ( DivLong(c,y3,(UWORD *)cmodvec,nmod,d,&y5,a,&tdenom) ) goto ModErr;
03289 }
03290 if ( !tdenom ) { *na = 0; goto normalreturn; }
03291 if ( ( ( AC.modmode & POSNEG ) != 0 ) && ( ( par & FROMFUNCTION ) == 0 ) ) {
03292     NormalModulus(a,&tdenom);
03293 }
03294 else if ( tdenom < 0 ) {
03295     SubPLon((UWORD *)cmodvec,nmod,a,-tdenom,a,&tdenom);
03296 }
03297 *na = tdenom;
03298 i = ABS(tdenom);
03299 a += i;
03300 *a++ = 1;
03301 while ( --i > 0 ) *a++ = 0;
03302 normalreturn:
03303     NumberFree(c,"TakeModulus"); NumberFree(d,"TakeModulus"); NumberFree(e,"TakeModulus");
03304     NumberFree(f,"TakeModulus"); NumberFree(g,"TakeModulus"); NumberFree(h,"TakeModulus");
03305     return(0);
03306 ModErr:
03307     MLOCK(ErrorMessageLock);
03308     MesCall("TakeModulus");
03309     MUNLOCK(ErrorMessageLock);

```

```

03310     NumberFree(c,"TakeModulus"); NumberFree(d,"TakeModulus"); NumberFree(e,"TakeModulus");
03311     NumberFree(f,"TakeModulus"); NumberFree(g,"TakeModulus"); NumberFree(h,"TakeModulus");
03312     SETERROR(-1)
03313 }
03314
03315 /*
03316     #] TakeModulus :
03317     #[ TakeNormalModulus : WORD TakeNormalModulus(a,na,par)
03318
03319     added by Jan [01-09-2010]
03320 */
03321
03322 int TakeNormalModulus (UWORD *a, WORD *na, UWORD *c, WORD nc, WORD par)
03323 {
03324     WORD n;
03325     WORD nhalfc;
03326     UWORD *halfc;
03327
03328     GETIDENTITY;
03329
03330     /* determine c/2 by right shifting */
03331     halfc = NumberMalloc("TakeNormalModulus");
03332     nhalfc=nc;
03333     WCOPY(halfc,c,nc);
03334
03335     for (n=0; n<nhalfc; n++) {
03336         halfc[n] /= 2;
03337         if (n+1<nc) halfc[n] |= c[n+1] << (BITSINWORD-1);
03338     }
03339
03340     if (halfc[nhalfc-1]==0)
03341         nhalfc--;
03342
03343     /* takes care of the number never expanding, e.g., -1(mod 100) -> 99 -> -1 */
03344     if (BigLong(a,ABS(*na),halfc,nhalfc) > 0) {
03345
03346         TakeModulus(a,na,c,nc,par);
03347
03348         n = ABS(*na);
03349         if (BigLong(a,n,halfc,nhalfc) > 0) {
03350             SubPLon(c,nc,a,n,a,&n);
03351             *na = (*na > 0 ? -n : n);
03352         }
03353     }
03354
03355     NumberFree(halfc,"TakeNormalModulus");
03356     return(0);
03357 }
03358
03359 /*
03360     #] TakeNormalModulus :
03361     #[ MakeModTable : WORD MakeModTable()
03362 */
03363
03364 int MakeModTable(void)
03365 {
03366     LONG size, i, j, n;
03367     n = ABS(AC.ncmod);
03368     if ( AC.modpowers ) {
03369         M_free(AC.modpowers,"AC.modpowers");
03370         AC.modpowers = NULL;
03371     }
03372     if ( n > 2 ) {
03373         MLOCK(ErrorMessageLock);
03374         MesPrint("%No memory for modulus generator power table");
03375         MUNLOCK(ErrorMessageLock);
03376         Terminate(-1);
03377     }
03378     if ( n == 0 ) return(0);
03379     size = (LONG) (*AC.cmod);
03380     if ( n == 2 ) size += ((LONG)AC.cmod[1]<<BITSINWORD);
03381     AC.modpowers = (UWORD *)Mallc1(size*n*sizeof(UWORD),"table for powers of modulus");
03382     if ( n == 1 ) {
03383         j = 1;
03384         for ( i = 0; i < size; i++ ) AC.modpowers[i] = 0;
03385         for ( i = 0; i < size; i++ ) {
03386             AC.modpowers[j] = (WORD)i;
03387             j *= *AC.powmod;
03388             j %= *AC.cmod;
03389         }
03390         for ( i = 2; i < size; i++ ) {
03391             if ( AC.modpowers[i] == 0 ) {
03392                 MLOCK(ErrorMessageLock);
03393                 MesPrint("&improper generator for this modulus");
03394                 MUNLOCK(ErrorMessageLock);
03395                 M_free(AC.modpowers,"AC.modpowers");
03396                 return(-1);

```

```

03397     }
03398     }
03399     AC.modpowers[1] = 0;
03400 }
03401 else {
03402     GETIDENTITY
03403     WORD nSkrat, n2;
03404     UWORD *MMskrat7 = NumberMalloc("MakeModTable"), *MMskratC = NumberMalloc("MakeModTable");
03405     *MMskratC = 1;
03406     nSkrat = 1;
03407     j = size * 2;
03408     for ( i = 0; i < j; i+=2 ) { AC.modpowers[i] = 0; AC.modpowers[i+1] = 0; }
03409     for ( i = 0; i < size; i++ ) {
03410         j = *MMskratC + (((LONG)MMskratC[1])«BITSINWORD);
03411         j *= 2;
03412         AC.modpowers[j] = (WORD)(i & WORDMASK);
03413         AC.modpowers[j+1] = (WORD)(i » BITSINWORD);
03414         Mullong((UWORD *)MMskratC,nSkrat,(UWORD *)AC.powmod,
03415             AC.npowmod,(UWORD *)MMskrat7,&n2);
03416         TakeModulus(MMskrat7,&n2,AC.cmod,AC.ncmod,NOUNPACK);
03417         *MMskratC = *MMskrat7; MMskratC[1] = MMskrat7[1]; nSkrat = n2;
03418     }
03419     NumberFree(MMskrat7,"MakeModTable"); NumberFree(MMskratC,"MakeModTable");
03420     j = size * 2;
03421     for ( i = 4; i < j; i+=2 ) {
03422         if ( AC.modpowers[i] == 0 && AC.modpowers[i+1] == 0 ) {
03423             MLOCK(ErrorMessageLock);
03424             MesPrint("&improper generator for this modulus");
03425             MUNLOCK(ErrorMessageLock);
03426             M_free(AC.modpowers,"AC.modpowers");
03427             return(-1);
03428         }
03429     }
03430     AC.modpowers[2] = AC.modpowers[3] = 0;
03431 }
03432 return(0);
03433 }
03434
03435 /*
03436     #] MakeModTable :
03437     #] RekenTerms :
03438     #[ Functions :
03439         #[ Factorial :      WORD Factorial(n,a,na)
03440
03441     Starts with only the value of fac_(0).
03442     Builds up what is needed and remembers it for the next time.
03443
03444     We have:
03445         AT.nfac: the number of the highest stored factorial
03446         AT.pfac: the array of locations in the array of stored factorials
03447         AT.factorials: the array with stored factorials
03448 */
03449
03450 int Factorial(PHEAD WORD n, UWORD *a, WORD *na)
03451 {
03452     GETBIDENTITY
03453     UWORD *b, *c;
03454     WORD nc;
03455     int i, j;
03456     LONG ii;
03457     if ( n > AT.nfac ) {
03458         if ( AT.factorials == 0 ) {
03459             AT.nfac = 0; AT.mfac = 50; AT.sfact = 400;
03460             AT.pfac = (LONG *)Mallocl1((AT.mfac+2)*sizeof(LONG),"factorials");
03461             AT.factorials = (UWORD *)Mallocl1(AT.sfact*sizeof(UWORD),"factorials");
03462             AT.factorials[0] = 1; AT.pfac[0] = 0; AT.pfac[1] = 1;
03463         }
03464         b = a;
03465         c = AT.factorials+AT.pfac[AT.nfac];
03466         nc = i = AT.pfac[AT.nfac+1] - AT.pfac[AT.nfac];
03467         while ( --i >= 0 ) *b++ = *c++;
03468         for ( j = AT.nfac+1; j <= n; j++ ) {
03469             Product(a,&nc,j);
03470             if ( nc > AM.MaxTal ) {
03471                 MLOCK(ErrorMessageLock);
03472                 MesPrint("Overflow in factorial. MaxTal = %d",AM.MaxTal);
03473                 MesPrint("Increase MaxTerm in %s",setupfilename);
03474                 MUNLOCK(ErrorMessageLock);
03475                 return(-1);
03476             }
03477             if ( j > AT.mfac ) { /* double the pfac buffer */
03478                 LONG *p;
03479                 p = (LONG *)Mallocl1((AT.mfac*2+2)*sizeof(LONG),"factorials");
03480                 i = AT.mfac;
03481                 for ( i = AT.mfac+1; i >= 0; i-- ) p[i] = AT.pfac[i];
03482                 M_free(AT.pfac,"factorial offsets"); AT.pfac = p; AT.mfac *= 2;
03483             }

```

```

03484         if ( AT.pfac[j] + nc >= AT.sfact ) { /* double the factorials buffer */
03485             UWORD *f;
03486             f = (UWORD *)Malloc1(AT.sfact*2*sizeof(UWORD),"factorials");
03487             ii = AT.sfact;
03488             c = AT.factorials; b = f;
03489             while ( --ii >= 0 ) *b++ = *c++;
03490             M_free(AT.factorials,"factorials");
03491             AT.factorials = f;
03492             AT.sfact *= 2;
03493         }
03494         b = a; c = AT.factorials + AT.pfac[j]; i = nc;
03495         while ( --i >= 0 ) *c++ = *b++;
03496         AT.pfac[j+1] = AT.pfac[j] + nc;
03497     }
03498     *na = nc;
03499     AT.nfac = n;
03500 }
03501 else if ( n == 0 ) {
03502     *a = 1; *na = 1;
03503 }
03504 else {
03505     *na = i = AT.pfac[n+1] - AT.pfac[n];
03506     b = AT.factorials + AT.pfac[n];
03507     while ( --i >= 0 ) *a++ = *b++;
03508 }
03509 return(0);
03510 }
03511
03512 /*
03513     #] Factorial :
03514     #[ Bernoulli :      WORD Bernoulli(n,a,na)
03515
03516     Starts with only the value of bernoulli_(0).
03517     Builds up what is needed and remembers it for the next time.
03518     b_0 = 1
03519     (n+1)*b_n = -b_{n-1}-sum_(i,1,n-1,b_i*b_{n-i})
03520     The n-1 plays only a role for b_2.
03521     We have hard coded b_0,b_1,b_2 and b_odd. After that:
03522     (2n+1)*b_{2n} = -sum_(i,1,n-1,b_{2i}*b_{2n-2i})
03523
03524     We have:
03525     AT.nBer: the number of the highest stored Bernoulli number
03526     AT.pBer: the array of locations in the array of stored Bernoulli numbers
03527     AT.bernoullis: the array with stored Bernoulli numbers
03528 */
03529
03530 int Bernoulli(WORD n, UWORD *a, WORD *na)
03531 {
03532     GETIDENTITY
03533     UWORD *b, *c, *scrib, *ntop, *ntopl;
03534     WORD i, i1, i2, nhalf, nqua, nscrib, nntop, nntopl, *oldworkpointer;
03535     UWORD twee = 2, twonplus1;
03536     int j;
03537     LONG ii;
03538     if ( n <= 1 ) {
03539         if ( n == 0 ) { a[0] = a[1] = 1; *na = 3; }
03540         else if ( n == 1 ) { a[0] = 1; a[1] = 2; *na = 3; }
03541         return(0);
03542     }
03543     if ( ( n & 1 ) != 0 ) { a[0] = a[1] = 0; *na = 0; return(0); }
03544     nhalf = n/2;
03545     if ( nhalf > AT.nBer ) {
03546         oldworkpointer = AT.WorkPointer;
03547         if ( AT.bernoullis == 0 ) {
03548             AT.nBer = 1; AT.mBer = 50; AT.sBer = 400;
03549             AT.pBer = (LONG *)Malloc1((AT.mBer+2)*sizeof(LONG),"bernoullis");
03550             AT.bernoullis = (UWORD *)Malloc1(AT.sBer*sizeof(UWORD),"bernoullis");
03551             AT.pBer[1] = 0; AT.pBer[2] = 3;
03552             AT.bernoullis[0] = 3; AT.bernoullis[1] = 1; AT.bernoullis[2] = 12;
03553             if ( nhalf == 1 ) {
03554                 a[0] = 1; a[1] = 12; *na = 3; return(0);
03555             }
03556         }
03557         while ( nhalf > AT.mBer ) {
03558             LONG *p;
03559             p = (LONG *)Malloc1((AT.mBer*2+1)*sizeof(LONG),"bernoullis");
03560             i = AT.mBer;
03561             for ( i = AT.mBer; i >= 0; i-- ) p[i] = AT.pBer[i];
03562             M_free(AT.pBer,"factorial pointers"); AT.pBer = p; AT.mBer *= 2;
03563         }
03564         for ( n = AT.nBer+1; n <= nhalf; n++ ) {
03565             scrib = (UWORD *) (AT.WorkPointer);
03566             nqua = n/2;
03567             if ( ( n & 1 ) == 1 ) {
03568                 nscrib = 0; ntop = scrib;
03569             }
03570             else {

```



```

03571         b = AT.bernoullis + AT.pBer[nqua];
03572         nscrib = *b++;
03573         i = (WORD)(REDLENG(nscrib));
03574         MulRat(BHEAD b,i,b,i,scrib,&nscrib);
03575         ntop = scrib + 2*nscrib;
03576         nqua--;
03577     }
03578     for ( j = 1; j <= nqua; j++ ) {
03579         b = AT.bernoullis + AT.pBer[j];
03580         c = AT.bernoullis + AT.pBer[n-j];
03581         i1 = (WORD)(*b); i2 = (WORD)(*c);
03582         i1 = REDLENG(i1);
03583         i2 = REDLENG(i2);
03584         MulRat(BHEAD b+1,i1,c+1,i2,ntop,&nntop);
03585         Mullt(BHEAD ntop,&nntop,&twee,1);
03586         if ( nscrib ) {
03587             i = (WORD)nntop; if ( i < 0 ) i = -i;
03588             ntop1 = ntop + 2*i;
03589             AddRat(BHEAD ntop,nntop,scrib,nscrib,ntop1,&nntop1);
03590         }
03591         else {
03592             ntop1 = ntop; nntop1 = nntop;
03593         }
03594         nscrib = i1 = (WORD)nntop1;
03595         if ( i1 < 0 ) i1 = - i1;
03596         i1 = 2*i1;
03597         for ( i = 0; i < i1; i++ ) scrib[i] = ntop1[i];
03598         ntop = scrib + i1;
03599     }
03600     twonplus1 = 2*n+1;
03601     Divvy(BHEAD scrib,&nscrib,&twonplus1,-1);
03602     i1 = INCLENG(nscrib);
03603     i2 = i1; if ( i2 < 0 ) i2 = -i2;
03604     i = (WORD)(AT.bernoullis[AT.pBer[n-1]]);
03605     if ( i < 0 ) i = -i;
03606     AT.pBer[n] = AT.pBer[n-1]+i;
03607     if ( AT.pBer[n] + i2 >= AT.sBer ) {
03608         UWORD *f;
03609         f = (UWORD *)Malloca(AT.sBer*2*sizeof(UWORD),"bernoullis");
03610         ii = AT.sBer;
03611         c = AT.bernoullis; b = f;
03612         while ( --ii >= 0 ) *b++ = *c++;
03613         M_free(AT.bernoullis,"bernoullis");
03614         AT.bernoullis = f;
03615         AT.sBer *= 2;
03616     }
03617     c = AT.bernoullis + AT.pBer[n]; b = scrib;
03618     *c++ = i1;
03619     for ( i = 1; i < i2; i++ ) *c++ = *b++;
03620 }
03621 AT.nBer = nhalf;
03622 AT.WorkPointer = oldworkpointer;
03623 }
03624 b = AT.bernoullis + AT.pBer[nhalf];
03625 *na = i = (WORD)(*b++);
03626 if ( i < 0 ) i = -i;
03627 i--;
03628 while ( --i >= 0 ) *a++ = *b++;
03629 return(0);
03630 }
03631
03632 /*
03633     #] Bernoulli :
03634     #[ NextPrime :
03635 */
03647 #if ( BITSINWORD == 32 )
03648
03649 void StartPrimeList(PHEAD0)
03650 {
03651     int i, j;
03652     AR.PrimeList[AR.numinprimelist++] = 3;
03653     for ( i = 5; i < 46340; i += 2 ) {
03654         for ( j = 0; j < AR.numinprimelist && AR.PrimeList[j]*AR.PrimeList[j] <= i; j++ ) {
03655             if ( i % AR.PrimeList[j] == 0 ) goto nexti;
03656         }
03657         AR.PrimeList[AR.numinprimelist++] = i;
03658     nexti:;
03659     }
03660     AR.notfirstprime = 1;
03661 }
03662
03663 #endif
03664
03665 WORD NextPrime(PHEAD WORD num)
03666 {
03667     int i, j;
03668     WORD *newpl;

```

```

03669     LONG newsize, x;
03670 #if ( BITSINWORD == 32 )
03671     if ( AR.notfirstprime == 0 ) StartPrimeList(BHEAD0);
03672 #endif
03673     if ( num > AT.inprimelist ) {
03674         while ( AT.inprimelist < num ) {
03675             if ( num >= AT.sizeprimelist ) {
03676                 if ( AT.sizeprimelist == 0 ) newsize = 32;
03677                 else newsize = 2*AT.sizeprimelist;
03678                 while ( num >= newsize ) newsize = newsize*2;
03679                 newpl = (WORD *)Malloca1(newsize*sizeof(WORD),"NextPrime");
03680                 for ( i = 0; i < AT.sizeprimelist; i++ ) {
03681                     newpl[i] = AT.primelist[i];
03682                 }
03683                 if ( AT.sizeprimelist > 0 ) {
03684                     M_free(AT.primelist,"NextPrime");
03685                 }
03686                 AT.sizeprimelist = newsize;
03687                 AT.primelist = newpl;
03688             }
03689             if ( AT.inprimelist < 0 ) { i = MAXPOSITIVE; }
03690             else { i = AT.primelist[AT.inprimelist]; }
03691             while ( i > MAXPOWER ) {
03692                 i -= 2; x = i;
03693 #if ( BITSINWORD == 32 )
03694                 for ( j = 0; j < AR.numinprimelist && AR.PrimeList[j]*(LONG)(AR.PrimeList[j]) <= x;
03695                     j++ ) {
03696                     if ( x % AR.PrimeList[j] == 0 ) goto nexti;
03697                 }
03698             #else
03699                 for ( j = 3; j*((LONG)j) <= x; j += 2 ) {
03700                     if ( x % j == 0 ) goto nexti;
03701                 }
03702             #endif
03703             AT.inprimelist++;
03704             AT.primelist[AT.inprimelist] = i;
03705             break;
03706         }
03707         nexti:;
03708     }
03709     if ( i < MAXPOWER ) {
03710         MLOCK(ErrorMessageLock);
03711         MesPrint("There are not enough short prime numbers for this calculation");
03712         MesPrint("Try to use a computer with a %d-bits architecture",
03713             (int)(BITSINWORD*4));
03714         MUNLOCK(ErrorMessageLock);
03715         Terminate(-1);
03716     }
03717     return(AT.primelist[num]);
03718 }
03719
03720 /*
03721     #] NextPrime :
03722     #[ Moebius :
03723
03724     Returns the value of the Moebius function if n fits inside
03725     a WORD.
03726     The method we use is a bit like the sieve of Erathostenes.
03727 */
03728
03729 WORD Moebius(PHEAD WORD nn)
03730 {
03731     WORD i,n = nn, x;
03732     LONG newsize;
03733     SBYTE *newtable, mu;
03734 #if ( BITSINWORD == 32 )
03735     if ( AR.notfirstprime == 0 ) StartPrimeList(BHEAD0);
03736 #endif
03737 /*
03738     First we make sure that:
03739     a: the table is big enough.
03740     b: the number is not already in the table.
03741 */
03742     if ( nn >= AR.moebiustablesz ) {
03743         if ( AR.moebiustablesz <= 0 ) { newsize = (LONG)nn + 20; }
03744         else { newsize = (LONG)nn*2; }
03745         if ( newsize > MAXPOSITIVE ) newsize = MAXPOSITIVE;
03746         newtable = (SBYTE *)Malloca1(newsize*sizeof(SBYTE),"Moebius");
03747         for ( i = 0; i < AR.moebiustablesz; i++ ) newtable[i] = AR.moebiustable[i];
03748         for ( ; i < newsize; i++ ) newtable[i] = 2;
03749         if ( AR.moebiustablesz > 0 ) M_free(AR.moebiustable,"Moebius");
03750         AR.moebiustable = newtable;
03751         AR.moebiustablesz = newsize;
03752     }
03753     /* NOTE: nn == MAXPOSITIVE never fits in moebiustable. */
03754     if ( nn != MAXPOSITIVE && AR.moebiustable[nn] != 2 ) return((WORD)AR.moebiustable[nn]);

```

```

03755     mu = 1;
03756     if ( n == 1 ) goto putvalue;
03757     if ( n % 2 == 0 ) {
03758         n /= 2;
03759         if ( n % 2 == 0 ) { mu = 0; goto putvalue; }
03760         if ( AR.moebiustable[n] != 2 ) { mu = -AR.moebiustable[n]; goto putvalue; }
03761         mu = -mu;
03762         if ( n == 1 ) goto putvalue;
03763     }
03764     #if ( BITSINWORD == 32 )
03765     for ( i = 0; i < AR.numinprimelist; i++ ) {
03766         x = AR.PrimeList[i];
03767     #else
03768     for ( x = 3; x < MAXPOSITIVE; x += 2 ) {
03769     #endif
03770         if ( n % x == 0 ) {
03771             n /= x;
03772             if ( n % x == 0 ) { mu = 0; goto putvalue; }
03773             if ( AR.moebiustable[n] != 2 ) { mu = -AR.moebiustable[n]; goto putvalue; }
03774             mu = -mu;
03775             if ( n == 1 ) goto putvalue;
03776         }
03777         if ( n < x*x ) break; /* notice that x*x always fits inside a WORD */
03778     }
03779     mu = -mu;
03780     putvalue:
03781     if ( nn != MAXPOSITIVE ) AR.moebiustable[nn] = mu;
03782     return ( (WORD)mu );
03783 }
03784
03785 /*
03786     #] Moebius :
03787     #[ wranf :
03788
03789     A random number generator that generates random WORDs with a very
03790     long sequence. It is based on the Knuth generator.
03791
03792     We take some care that each thread can run its own, but each
03793     uses its own startup. Hence the seed includes the identity of
03794     the thread.
03795
03796     For NPAIR1, NPAIR2 we can use any pair from the table on page 28.
03797     Candidates are 24,55 (the example on the pages 171,172)
03798     or (33,97) or (38,89)
03799     These values are defined in fsizes.h and used in startup.c and threads.c
03800 */
03801
03802 #define WARMUP 6
03803
03804 static void wranfnew(PHEAD0)
03805 {
03806     int i;
03807     LONG j;
03808     for ( i = 0; i < AR.wranfnpair1; i++ ) {
03809         j = AR.wranfia[i] - AR.wranfia[i+(AR.wranfnpair2-AR.wranfnpair1)];
03810         if ( j < 0 ) j += (LONG)1 « (2*BITSINWORD-2);
03811         AR.wranfia[i] = j;
03812     }
03813     for ( i = AR.wranfnpair1; i < AR.wranfnpair2; i++ ) {
03814         j = AR.wranfia[i] - AR.wranfia[i-AR.wranfnpair1];
03815         if ( j < 0 ) j += (LONG)1 « (2*BITSINWORD-2);
03816         AR.wranfia[i] = j;
03817     }
03818 }
03819
03820 void iniwranf(PHEAD0)
03821 {
03822     int imax = AR.wranfnpair2-1;
03823     ULONG i, ii, seed = AR.wranfseed;
03824     LONG j, k;
03825     ULONG offset = 12345;
03826     #ifdef PARALLELCODE
03827     int id;
03828     #if defined(WITHPTHREADS)
03829     id = AT.identity;
03830     #elif defined(WITHMPI)
03831     id = PF.me;
03832     #endif
03833     seed += id;
03834     i = id + 1;
03835     if ( i > 1 ) {
03836         ULONG pow, accu;
03837         pow = offset; accu = 1;
03838         while ( i ) {
03839             if ( ( i & 1 ) != 0 ) accu *= pow;
03840             i /= 2; pow = pow*pow;
03841         }

```

```

03842         offset = accu;
03843     }
03844 #endif
03845     if ( seed < ((LONG)1«(BITSINWORD-1)) ) {
03846         j = ( (seed+31459L) « (BITSINWORD-2))+offset;
03847     }
03848     else if ( seed < ((LONG)1«(BITSINWORD+10-1)) ) {
03849         j = ( (seed+31459L) « (BITSINWORD-10-2))+offset;
03850     }
03851     else {
03852         j = ( (seed+31459L) « 1)+offset;
03853     }
03854     if ( ( seed & 1 ) == 1 ) seed++;
03855     j += seed;
03856     AR.wranfia[imax] = j;
03857     k = 1;
03858     for ( i = 0; i <= (ULONG)(imax); i++ ) {
03859         ii = (AR.wranfnpair1*i)%AR.wranfnpair2;
03860         AR.wranfia[ii] = k;
03861         k = ULONGToLong((ULONG)j - (ULONG)k);
03862         if ( k < 0 ) k += (LONG)1 « (2*BITSINWORD-2);
03863         j = AR.wranfia[ii];
03864     }
03865     for ( i = 0; i < WARMUP; i++ ) wranfnew(BHEAD0);
03866     AR.wranfcall = 0;
03867 }
03868
03869 UWORD wranf(PHEAD0)
03870 {
03871     UWORD wval;
03872     if ( AR.wranfia == 0 ) {
03873         AR.wranfia = (ULONG *)Malloc1(AR.wranfnpair2*sizeof(ULONG),"wranf");
03874         iniwranf(BHEAD0);
03875     }
03876     if ( AR.wranfcall >= AR.wranfnpair2 ) {
03877         wranfnew(BHEAD0);
03878         AR.wranfcall = 0;
03879     }
03880     wval = (UWORD) (AR.wranfia[AR.wranfcall++])«(BITSINWORD-1));
03881     return(wval);
03882 }
03883
03884 /*
03885  Returns a random UWORD in the range (0,...,imax-1)
03886 */
03887
03888 UWORD iranf(PHEAD UWORD imax)
03889 {
03890     UWORD i;
03891     ULONG x, xmax;
03892     if (imax < 2) return 0;
03893     x = (LONG)1 « BITSINWORD;
03894     xmax = x - x%imax;
03895     while ( ( i = wranf(BHEAD0) ) >= xmax ) {}
03896     return(i%imax);
03897 }
03898
03899 /*
03900     #] wranf :
03901     #[ PreRandom :
03902
03903     The random number generator of the preprocessor.
03904     This one is completely different from the execution time generator
03905     random_(number). In the preprocessor we generate a floating point
03906     number in a string according to a distribution.
03907     Currently allowed are:
03908         RANDOM_(log,min,max)
03909         RANDOM_(lin,min,max)
03910     The return value is a string with the floating point number.
03911 */
03912
03913 UBYTE *PreRandom(UBYTE *s)
03914 {
03915     GETIDENTITY
03916     UBYTE *mode,*mins = 0,*maxs = 0, *outval;
03917     float num;
03918     double minval, maxval, value = 0;
03919     int linlog = -1;
03920     mode = s;
03921     while ( FG.cTable[*s] <= 1 ) s++;
03922     if ( *s == ',' ) { *s = 0; s++; }
03923     mins = s;
03924     while ( *s && *s != ',' ) s++;
03925     if ( *s == ',' ) { *s = 0; s++; }
03926     maxs = s;
03927     while ( *s && *s != ',' ) s++;
03928     if ( *s || *maxs == 0 || *mins == 0 ) {

```

```


03929     MesPrint("@Illegal arguments in macro RANDOM_");
03930     Terminate(-1);
03931 }
03932 if ( StrICmp(mode, (UBYTE *)"lin") == 0 ) {
03933     linlog = 0;
03934 }
03935 else if ( StrICmp(mode, (UBYTE *)"log") == 0 ) {
03936     linlog = 1;
03937 }
03938 else {
03939     MesPrint("@Illegal mode argument in macro RANDOM_");
03940     Terminate(-1);
03941 }
03942
03943 sscanf((char *)mins, "%f", &num); minval = num;
03944 sscanf((char *)maxs, "%f", &num); maxval = num;
03945
03946 /*
03947  * Note on ParFORM: we should use the same random number on all the
03948  * processes in the compilation phase. The random number is generated
03949  * on the master and broadcast to the other processes.
03950  */
03951 {
03952     UWORD x;
03953     double xx;
03954 #ifdef WITHMPI
03955     x = 0;
03956     if ( PF.me == MASTER ) {
03957         x = wranf(BHEAD0);
03958     }
03959     x = (UWORD)PF_BroadcastNumber((LONG)x);
03960 #else
03961     x = wranf(BHEAD0);
03962 #endif
03963     xx = x/pow(2.0, (double) (BITSINWORD-1));
03964     if ( linlog == 0 ) {
03965         value = minval + (maxval-minval)*xx;
03966     }
03967     else if ( linlog == 1 ) {
03968         value = minval * pow(maxval/minval, xx);
03969     }
03970 }
03971
03972 outval = (UBYTE *)Malloca(64, "PreRandom");
03973 if ( ABS(value) < 0.00001 || ABS(value) > 1000000. ) {
03974     snprintf((char *)outval, 64, "%e", value);
03975 }
03976 else if ( ABS(value) < 0.0001 ) { snprintf((char *)outval, 64, "%10f", value); }
03977 else if ( ABS(value) < 0.001 ) { snprintf((char *)outval, 64, "%9f", value); }
03978 else if ( ABS(value) < 0.01 ) { snprintf((char *)outval, 64, "%8f", value); }
03979 else if ( ABS(value) < 0.1 ) { snprintf((char *)outval, 64, "%7f", value); }
03980 else if ( ABS(value) < 1. ) { snprintf((char *)outval, 64, "%6f", value); }
03981 else if ( ABS(value) < 10. ) { snprintf((char *)outval, 64, "%5f", value); }
03982 else if ( ABS(value) < 100. ) { snprintf((char *)outval, 64, "%4f", value); }
03983 else if ( ABS(value) < 1000. ) { snprintf((char *)outval, 64, "%3f", value); }
03984 else if ( ABS(value) < 10000. ) { snprintf((char *)outval, 64, "%2f", value); }
03985 else { snprintf((char *)outval, 64, "%1f", value); }
03986 return(outval);
03987 }
03988
03989 /*
03990     #] PreRandom :
03991     #] Functions :
03992 */

```

4.123 reshuf.c File Reference

```
#include "form3.h"
```

Include dependency graph for reshuf.c:

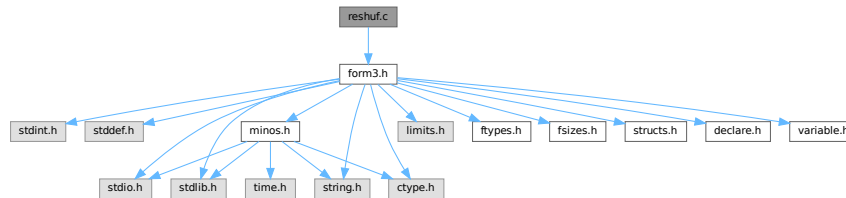

Functions

- WORD [ReNumber](#) (PHEAD WORD *term)
- void [FunLevel](#) (PHEAD WORD *term)
- WORD [DetCurDum](#) (PHEAD WORD *t)
- int [FullRenumber](#) (PHEAD WORD *term, WORD par)
- void [MoveDummies](#) (PHEAD WORD *term, WORD shift)
- void [AdjustRenumScratch](#) (PHEAD0)
- WORD [CountDo](#) (WORD *term, WORD *instruct)
- WORD [CountFun](#) (WORD *term, WORD *countfun)
- WORD [DimensionSubterm](#) (WORD *subterm)
- WORD [DimensionTerm](#) (WORD *term)
- WORD [DimensionExpression](#) (PHEAD WORD *expr)
- int [MultDo](#) (PHEAD WORD *term, WORD *pattern)
- int [TryDo](#) (PHEAD WORD *term, WORD *pattern, WORD level)
- int [DoDistrib](#) (PHEAD WORD *term, WORD level)
- int [EqualArg](#) (WORD *parms, WORD num1, WORD num2)
- int [DoDelta3](#) (PHEAD WORD *term, WORD level)
- int [TestPartitions](#) (WORD *tfun, [PARTI](#) *parti)
- int [DoPartitions](#) (PHEAD WORD *term, WORD level)
- int [DoPermutations](#) (PHEAD WORD *term, WORD level)
- int [DoShuffle](#) (WORD *term, WORD level, WORD fun, WORD option)
- int [Shuffle](#) (WORD *from1, WORD *from2, WORD *to)
- int [FinishShuffle](#) (WORD *fini)
- int [DoStuffle](#) (WORD *term, WORD level, WORD fun, WORD option)
- int [Stuffle](#) (WORD *from1, WORD *from2, WORD *to)
- int [FinishStuffle](#) (WORD *fini)
- WORD * [StuffRootAdd](#) (WORD *t1, WORD *t2, WORD *to)

4.123.1 Detailed Description

Mixed routines: Routines for relabelling dummy indices. The multiply command The distrib_ function The tryreplace statement

Definition in file [reshuf.c](#).

4.123.2 Macro Definition Documentation

4.123.2.1 NEWCODE

```
#define NEWCODE
```

Definition at line 35 of file [reshuf.c](#).

4.123.3 Function Documentation

4.123.3.1 ReNumber()

```
WORD ReNumber (
    PHEAD WORD * term )
```

Definition at line 80 of file [reshuf.c](#).

4.123.3.2 FunLevel()

```
void FunLevel (
    PHEAD WORD * term )
```

Definition at line 130 of file [reshuf.c](#).

4.123.3.3 DetCurDum()

```
WORD DetCurDum (
    PHEAD WORD * t )
```

Definition at line 252 of file [reshuf.c](#).

4.123.3.4 FullRenumber()

```
int FullRenumber (
    PHEAD WORD * term,
    WORD par )
```

Definition at line 324 of file [reshuf.c](#).

4.123.3.5 MoveDummies()

```
void MoveDummies (
    PHEAD WORD * term,
    WORD shift )
```

Definition at line 436 of file [reshuf.c](#).

4.123.3.6 AdjustRenumScratch()

```
void AdjustRenumScratch (
    PHEAD0 )
```

Definition at line 506 of file [reshuf.c](#).

4.123.3.7 CountDo()

```
WORD CountDo (
    WORD * term,
    WORD * instruct )
```

Definition at line 552 of file [reshuf.c](#).

4.123.3.8 CountFun()

```
WORD CountFun (
    WORD * term,
    WORD * countfun )
```

Definition at line 706 of file [reshuf.c](#).

4.123.3.9 DimensionSubterm()

```
WORD DimensionSubterm (
    WORD * subterm )
```

Definition at line 867 of file [reshuf.c](#).

4.123.3.10 DimensionTerm()

```
WORD DimensionTerm (
    WORD * term )
```

Definition at line 968 of file [reshuf.c](#).

4.123.3.11 DimensionExpression()

```
WORD DimensionExpression (
    PHEAD WORD * expr )
```

Definition at line 1000 of file [reshuf.c](#).

4.123.3.12 MultDo()

```
int MultDo (
    PHEAD WORD * term,
    WORD * pattern )
```

Definition at line [1044](#) of file [reshuf.c](#).

4.123.3.13 TryDo()

```
int TryDo (
    PHEAD WORD * term,
    WORD * pattern,
    WORD level )
```

Definition at line [1072](#) of file [reshuf.c](#).

4.123.3.14 DoDistrib()

```
int DoDistrib (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [1119](#) of file [reshuf.c](#).

4.123.3.15 EqualArg()

```
int EqualArg (
    WORD * parms,
    WORD num1,
    WORD num2 )
```

Definition at line [1379](#) of file [reshuf.c](#).

4.123.3.16 DoDelta3()

```
int DoDelta3 (
    PHEAD WORD * term,
    WORD level )
```

Definition at line [1405](#) of file [reshuf.c](#).

4.123.3.17 TestPartitions()

```
int TestPartitions (
    WORD * tfun,
    PARTI * parti )
```

Definition at line [1607](#) of file [reshuf.c](#).

4.123.3.18 DoPartitions()

```
int DoPartitions (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 1722 of file [reshuf.c](#).

4.123.3.19 DoPermutations()

```
int DoPermutations (
    PHEAD WORD * term,
    WORD level )
```

Definition at line 2007 of file [reshuf.c](#).

4.123.3.20 DoShuffle()

```
int DoShuffle (
    WORD * term,
    WORD level,
    WORD fun,
    WORD option )
```

Definition at line 2095 of file [reshuf.c](#).

4.123.3.21 Shuffle()

```
int Shuffle (
    WORD * from1,
    WORD * from2,
    WORD * to )
```

Definition at line 2229 of file [reshuf.c](#).

4.123.3.22 FinishShuffle()

```
int FinishShuffle (
    WORD * fini )
```

Definition at line 2421 of file [reshuf.c](#).

4.123.3.23 DoStuffle()

```
int DoStuffle (
    WORD * term,
    WORD level,
    WORD fun,
    WORD option )
```

Definition at line 2487 of file [reshuf.c](#).

4.123.3.24 Stuffle()

```
int Stuffle (
    WORD * from1,
    WORD * from2,
    WORD * to )
```

Definition at line 2702 of file [reshuf.c](#).

4.123.3.25 FinishStuffle()

```
int FinishStuffle (
    WORD * fini )
```

Definition at line 2829 of file [reshuf.c](#).

4.123.3.26 StuffRootAdd()

```
WORD * StuffRootAdd (
    WORD * t1,
    WORD * t2,
    WORD * to )
```

Definition at line 2876 of file [reshuf.c](#).

4.124 reshuf.c

[Go to the documentation of this file.](#)

```
00001
00009 /* #[ License : */
00010 /*
00011 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00012 * When using this file you are requested to refer to the publication
00013 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00014 * This is considered a matter of courtesy as the development was paid
00015 * for by FOM the Dutch physics granting agency and we would like to
00016 * be able to track its scientific use to convince FOM of its value
00017 * for the community.
00018 *
00019 * This file is part of FORM.
00020 *
00021 * FORM is free software: you can redistribute it and/or modify it under the
00022 * terms of the GNU General Public License as published by the Free Software
00023 * Foundation, either version 3 of the License, or (at your option) any later
00024 * version.
00025 *
00026 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00027 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00028 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00029 * details.
00030 *
00031 * You should have received a copy of the GNU General Public License along
00032 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00033 */
00034 /* #[ License : */
00035 #define NEWCODE
00036 /*
00037 * #[ Includes : reshuf.c
00038 */
00039
00040 #include "form3.h"
00041
00042 /*
00043 *#[ Includes :
```

```

00044     #[ Reshuf :
00045
00046     Routines to rearrange dummy indices, so that
00047     a: The notation becomes reasonably unique (the perfect job
00048         may consume very much time).
00049     b: The value of AR.CurDum is reset.
00050
00051     Also some routines are needed to aid in the reading of stored
00052     expressions. Also in those expressions there can be dummy
00053     indices, and there should be no conflict with the already
00054     existing dummies.
00055
00056     #[ ReNumber :
00057
00058     Reads the term, tests for dummies, and puts them in order.
00059     Note that this is kind of a first order approximation.
00060     There is quite some room to make this routine 'smart'
00061     First order:
00062         First index will be lowest, second will be next etc.
00063     Second order:
00064         Functions with more than one index and symmetry properties
00065         have some look ahead to see which index is the first to
00066         find its partner.
00067     Third order:
00068         Take the ordering of the functions into account.
00069     Fourth order:
00070         Try all permutations and see which one gives the 'minimal' term.
00071     Currently we use only the first order.
00072
00073     We need a scratch array for the numbers we find, and one for
00074     the addresses at which these numbers are.
00075     We can use the space for the Scrut arrays. There are 13 of those
00076     and each is AM.MaxTal UWORDS long.
00077
00078 /*
00079
00080 WORD ReNumber(PHEAD WORD *term)
00081 {
00082     GETBIDENTITY
00083     WORD *d, *e, **p, **f;
00084     WORD n, i, j, old;
00085     AN.DumFound = AN.RenumScratch;
00086     AN.DumPlace = AN.PoinScratch;
00087     AN.DumFunPlace = AN.FunScratch;
00088     AN.NumFound = 0;
00089     FunLevel(BHEAD term);
00090     d = AN.RenumScratch;
00091     p = AN.PoinScratch;
00092     f = AN.FunScratch;
00093 /*
00094     Now the first level sorting.
00095 */
00096     i = AN.IndDum;
00097     n = AN.NumFound;
00098     while ( --n >= 0 ) {
00099         if ( *d > 0 ) {
00100             old = **p;
00101             **p = ++i;
00102             if ( *f ) **f |= DIRTYSYMFLAG;
00103             e = d;
00104             e++;
00105             for ( j = 1; j <= n; j++ ) {
00106                 if ( *e && *(p[j]) == old ) {
00107                     *(p[j]) = i;
00108                     if ( f[j] ) *(f[j]) |= DIRTYSYMFLAG;
00109                     *e = 0;
00110                 }
00111                 e++;
00112             }
00113         }
00114         p++;
00115         d++;
00116         f++;
00117     }
00118     return(i);
00119 }
00120
00121 /*
00122     #[ ReNumber :
00123     #[ FunLevel :
00124
00125     Does one term in determining where the dummies are.
00126     Made to work recursively for functions.
00127
00128 */
00129
00130 void FunLevel(PHEAD WORD *term)

```

```

00131 {
00132     GETBIDENTITY
00133     WORD *t, *tstop, *r, *fun;
00134     WORD *m;
00135     t = r = term;
00136     r += *r;
00137     tstop = r - ABS(r[-1]);
00138     t++;
00139     if ( t < tstop ) do {
00140         r = t + t[1];
00141         switch ( *t ) {
00142             case SYMBOL:
00143             case DOTPRODUCT:
00144                 break;
00145             case VECTOR:
00146                 t += 3;
00147                 do {
00148                     if ( *t > AN.IndDum ) {
00149                         if ( AN.NumFound >= AN.MaxRenumScratch ) AdjustRenumScratch(BHEAD0);
00150                         AN.NumFound++;
00151                         *AN.DumFound++ = *t;
00152                         *AN.DumPlace++ = t;
00153                         *AN.DumFunPlace++ = 0;
00154                     }
00155                     t += 2;
00156                 } while ( t < r );
00157                 break;
00158             case SUBEXPRESSION:
00159 /*
00160             Still must hunt down the wildcards(?)
00161 */
00162                 break;
00163             case GAMMA:
00164                 t += FUNHEAD-2;
00165                 /* fall through */
00166             case DELTA:
00167             case INDEX:
00168                 t += 2;
00169                 while ( t < r ) {
00170                     if ( *t > AN.IndDum ) {
00171                         if ( AN.NumFound >= AN.MaxRenumScratch ) AdjustRenumScratch(BHEAD0);
00172                         AN.NumFound++;
00173                         *AN.DumFound++ = *t;
00174                         *AN.DumPlace++ = t;
00175                         *AN.DumFunPlace++ = 0;
00176                     }
00177                     t++;
00178                 }
00179                 break;
00180             case HAAKJE:
00181             case EXPRESSION:
00182             case SNUMBER:
00183             case LNUMBER:
00184                 break;
00185             default:
00186                 if ( *t < FUNCTION ) {
00187                     MLOCK(ErrorMessageLock);
00188                     MesPrint("Unexpected code in ReNumber");
00189                     MUNLOCK(ErrorMessageLock);
00190                     Terminate(-1);
00191                 }
00192                 fun = t+2;
00193                 if ( *t >= FUNCTION && functions[*t-FUNCTION].spec
00194                 >= TENSORFUNCTION ) {
00195                     t += FUNHEAD;
00196                     while ( t < r ) {
00197                         if ( *t > AN.IndDum ) {
00198                             if ( AN.NumFound >= AN.MaxRenumScratch ) AdjustRenumScratch(BHEAD0);
00199                             AN.NumFound++;
00200                             *AN.DumFound++ = *t;
00201                             *AN.DumPlace++ = t;
00202                             *AN.DumFunPlace++ = fun;
00203                         }
00204                         t++;
00205                     }
00206                     break;
00207                 }
00208                 t += FUNHEAD;
00209                 while ( t < r ) {
00210                     if ( *t > 0 ) {
00211
00212                         /* General function. Enter 'recursion'. */
00213
00214                         m = t + *t;
00215                         t += ARGHEAD;
00216                         while ( t < m ) {

```

```

00218             FunLevel(BHEAD t);
00219             t += *t;
00220         }
00221     }
00222     else {
00223         if ( *t == -INDEX ) {
00224             t++;
00225             if ( *t > AN.IndDum ) {
00226                 if ( AN.NumFound >= AN.MaxRenumScratch ) AdjustRenumScratch(BHEAD0);
00227                 AN.NumFound++;
00228                 *AN.DumFound++ = *t;
00229                 *AN.DumPlace++ = t;
00230                 *AN.DumFunPlace++ = fun;
00231             }
00232             t++;
00233         }
00234         else if ( *t <= -FUNCTION ) t++;
00235         else t += 2;
00236     }
00237 }
00238 break;
00239 }
00240 t = r;
00241 } while ( t < tstop );
00242 }
00243
00244 /*
00245     #] FunLevel :
00246     #[ DetCurDum :
00247
00248     We look for indices in the range AM.IndDum to AM.IndDum+MAXDUMMIES.
00249     The maximum value is returned.
00250 */
00251
00252 WORD DetCurDum(PHEAD WORD *t)
00253 {
00254     GETBIDENTITY
00255     WORD maxval = AN.IndDum;
00256     WORD maxtop = AM.IndDum + WILDOFFSET;
00257     WORD *tstop, *m, *r, i;
00258     tstop = t + *t - 1;
00259     tstop -= ABS(*tstop);
00260     t++;
00261     while ( t < tstop ) {
00262         if ( *t == VECTOR ) {
00263             m = t + 3;
00264             t += t[1];
00265             while ( m < t ) {
00266                 if ( *m > maxval && *m < maxtop ) maxval = *m;
00267                 m += 2;
00268             }
00269         }
00270         else if ( *t == DELTA || *t == INDEX ) {
00271             m = t + 2;
00272         Singles:
00273             t += t[1];
00274             while ( m < t ) {
00275                 if ( *m > maxval && *m < maxtop ) maxval = *m;
00276                 m++;
00277             }
00278         }
00279         else if ( *t >= FUNCTION ) {
00280             if ( functions[*t-FUNCTION].spec >= TENSORFUNCTION ) {
00281                 m = t + FUNHEAD;
00282                 goto Singles;
00283             }
00284             r = t + FUNHEAD;
00285             t += t[1];
00286             while ( r < t ) {          /* The arguments */
00287                 if ( *r < 0 ) {
00288                     if ( *r <= -FUNCTION ) r++;
00289                     else if ( *r == -INDEX ) {
00290                         if ( r[1] > maxval && r[1] < maxtop ) maxval = r[1];
00291                         r += 2;
00292                     }
00293                     else r += 2;
00294                 }
00295                 else {
00296                     m = r + ARGHEAD;
00297                     r += *r;
00298                     while ( m < r ) { /* Terms in the argument */
00299                         i = DetCurDum(BHEAD m);
00300                         if ( i > maxval && i < maxtop ) maxval = i;
00301                         m += *m;
00302                     }
00303                 }
00304             }

```

```

00305     }
00306     else {
00307         t += t[1];
00308     }
00309 }
00310 return(maxval);
00311 }
00312
00313 /*
00314     #] DetCurDum :
00315     #[ FullRenumber :
00316
00317     Does a full renumbering. May be slow if there are many indices.
00318     par = 1 Goes with a factorial!
00319     par = 0 All single exchanges only till there is no more improvement.
00320     Notice that there is a hole in the defense with respect to
00321     arguments inside functions inside functions.
00322 */
00323
00324 int FullRenumber(PHEAD WORD *term, WORD par)
00325 {
00326     GETBIDENTITY
00327     WORD *d, **p, **f, *w, *t, *best, *stac, *perm, a, *termtry;
00328     WORD n, i, j, k, ii;
00329     WORD *oldworkpointer = AT.WorkPointer;
00330     n = ReNumber(BHEAD term) - AM.IndDum;
00331     if ( n <= 1 ) return(0);
00332     Normalize(BHEAD term);
00333     if ( *term == 0 ) return(0);
00334     n = ReNumber(BHEAD term) - AM.IndDum;
00335     d = AN.RenumScratch;
00336     p = AN.PoinScratch;
00337     f = AN.FunScratch;
00338     if ( AT.WorkPointer < term + *term ) AT.WorkPointer = term + *term;
00339     k = AN.NumFound;
00340     best = w = AT.WorkPointer; t = term;
00341     for ( i = *term; i > 0; i-- ) *w++ = *t++;
00342     AT.WorkPointer = w;
00343     Normalize(BHEAD best);
00344     AT.WorkPointer = w = best + *best;
00345     stac = w+100;
00346     perm = stac + n + 1;
00347     termtry = perm + n + 1;
00348     for ( i = 1; i <= n; i++ ) perm[i] = i + AM.IndDum;
00349     for ( i = 1; i <= n; i++ ) stac[i] = i;
00350     for ( i = 0; i < k; i++ ) d[i] = *(p[i]) - AM.IndDum;
00351     if ( par == 0 ) { /* All single exchanges */
00352         for ( i = 1; i < n; i++ ) {
00353             for ( j = i+1; j <= n; j++ ) {
00354                 a = perm[j]; perm[j] = perm[i]; perm[i] = a;
00355                 for ( ii = 0; ii < k; ii++ ) {
00356                     *(p[ii]) = perm[d[ii]];
00357                     if ( f[ii] ) *(f[ii]) |= DIRTYSYMFLAG;
00358                 }
00359                 t = term; w = termtry;
00360                 for ( ii = 0; ii < *term; ii++ ) *w++ = *t++;
00361                 AT.WorkPointer = w;
00362                 if ( Normalize(BHEAD termtry) == 0 ) {
00363                     if ( *termtry == 0 ) goto Return0;
00364                     if ( ( ii = CompareTerms(BHEAD termtry,best,0) ) > 0 ) {
00365                         t = termtry; w = best;
00366                         for ( ii = 0; ii < *termtry; ii++ ) *w++ = *t++;
00367                         i = 0; break; /* restart from beginning */
00368                     }
00369                     else if ( ii == 0 && CompCoef(termtry,best) != 0 )
00370                         goto Return0;
00371                 }
00372                 /* if no success, set back */
00373                 a = perm[j]; perm[j] = perm[i]; perm[i] = a;
00374             }
00375         }
00376     }
00377     else if ( par == 1 ) { /* all permutations */
00378         j = n-1;
00379         for (;;) {
00380             if ( stac[j] == n ) {
00381                 a = perm[j]; perm[j] = perm[n]; perm[n] = a;
00382                 stac[j] = j;
00383                 j--;
00384                 if ( j <= 0 ) break;
00385                 continue;
00386             }
00387             if ( j != stac[j] ) {
00388                 a = perm[j]; perm[j] = perm[stac[j]]; perm[stac[j]] = a;
00389             }
00390             (stac[j])++;
00391             a = perm[j]; perm[j] = perm[stac[j]]; perm[stac[j]] = a;

```

```

00392         {
00393             for ( i = 0; i < k; i++ ) {
00394                 *(p[i]) = perm[d[i]];
00395                 if ( f[i] ) *(f[i]) |= DIRTSYMFFLAG;
00396             }
00397             t = term; w = termtry;
00398             for ( i = 0; i < *term; i++ ) *w++ = *t++;
00399             AT.WorkPointer = w;
00400             if ( Normalize(BHEAD termtry) == 0 ) {
00401                 if ( *termtry == 0 ) goto Return0;
00402                 if ( ( ii = CompareTerms(BHEAD termtry,best,0) ) > 0 ) {
00403                     t = termtry; w = best;
00404                     for ( i = 0; i < *termtry; i++ ) *w++ = *t++;
00405                 }
00406                 else if ( ii == 0 && CompCoef(termtry,best) != 0 )
00407                     goto Return0;
00408             }
00409         }
00410         if ( j < n-1 ) { j = n-1; }
00411     }
00412 }
00413 t = term; w = best;
00414 n = *best;
00415 for ( i = 0; i < n; i++ ) *t++ = *w++;
00416 AT.WorkPointer = oldworkpointer;
00417 return(0);
00418 Return0:
00419 *term = 0;
00420 AT.WorkPointer = oldworkpointer;
00421 return(0);
00422 }
00423
00424 /*
00425     #] FullRenumber :
00426     #[ MoveDummies :
00427
00428     Routine shifts the dummy indices by an amount 'shift'.
00429     It is an adaptation of DetCurDum.
00430     Needed for = ...*expression^power*...
00431     in which expression contains dummy indices.
00432     Note that this code should have been in ver1 already and has
00433     always been missing. Routine made 29-jan-2007.
00434 */
00435
00436 void MoveDummies(PHEAD WORD *term, WORD shift)
00437 {
00438     GETBIDENTITY
00439     WORD maxval = AN.IndDum;
00440     WORD maxtop = AM.IndDum + WILDOFFSET;
00441     WORD *tstop, *m, *r;
00442     tstop = term + *term - 1;
00443     tstop -= ABS(*tstop);
00444     term++;
00445     while ( term < tstop ) {
00446         if ( *term == VECTOR ) {
00447             m = term + 3;
00448             term += term[1];
00449             while ( m < term ) {
00450                 if ( *m > maxval && *m < maxtop ) *m += shift;
00451                 m += 2;
00452             }
00453         }
00454         else if ( *term == DELTA || *term == INDEX ) {
00455             m = term + 2;
00456         Singles:
00457             term += term[1];
00458             while ( m < term ) {
00459                 if ( *m > maxval && *m < maxtop ) *m += shift;
00460                 m++;
00461             }
00462         }
00463         else if ( *term >= FUNCTION ) {
00464             if ( functions[*term-FUNCTION].spec >= TENSORFUNCTION ) {
00465                 m = term + FUNHEAD;
00466                 goto Singles;
00467             }
00468             r = term + FUNHEAD;
00469             term += term[1];
00470             while ( r < term ) { /* The arguments */
00471                 if ( *r < 0 ) {
00472                     if ( *r <= -FUNCTION ) r++;
00473                     else if ( *r == -INDEX ) {
00474                         if ( r[1] > maxval && r[1] < maxtop ) r[1] += shift;
00475                         r += 2;
00476                     }
00477                     else r += 2;
00478                 }

```



```

00479         else {
00480             m = r + ARGHEAD;
00481             r += *r;
00482             while ( m < r ) { /* Terms in the argument */
00483                 MoveDummies(BHEAD m, shift);
00484                 m += *m;
00485             }
00486         }
00487     }
00488 }
00489 else {
00490     term += term[1];
00491 }
00492 }
00493 }
00494
00495 /*
00496     #] MoveDummies :
00497     #[ AdjustRenumScratch :
00498
00499     Extends the buffer for number of dummies that can be found in
00500     a term. Originally we had a fixed buffer at size 300 in the AN
00501     struct. Thomas Hahn ran out of that. Hence we have now made it
00502     a dynamical buffer.
00503     Note that the pointers used in FunLevel need adjustment as well.
00504 */
00505 void AdjustRenumScratch(PHEAD0)
00506 {
00507     GETBIDENTITY
00508     WORD newsize;
00509     int i;
00510     WORD **newpoin, *newnum;
00511     if ( AN.MaxRenumScratch == 0 ) newsize = 100;
00512     else newsize = AN.MaxRenumScratch*2;
00513     if ( newsize > MAXPOSITIVE/2 ) newsize = MAXPOSITIVE/2+1;
00514
00515     newpoin = (WORD **)Malloca1(newsize*sizeof(WORD *), "PoinScratch");
00516     for ( i = 0; i < AN.NumFound; i++ ) newpoin[i] = AN.PoinScratch[i];
00517     for ( ; i < newsize; i++ ) newpoin[i] = 0;
00518     if ( AN.PoinScratch ) M_free(AN.PoinScratch, "PoinScratch");
00519     AN.PoinScratch = newpoin;
00520     AN.DumPlace = newpoin + AN.NumFound;
00521
00522     newpoin = (WORD **)Malloca1(newsize*sizeof(WORD *), "FunScratch");
00523     for ( i = 0; i < AN.NumFound; i++ ) newpoin[i] = AN.FunScratch[i];
00524     for ( ; i < newsize; i++ ) newpoin[i] = 0;
00525     if ( AN.FunScratch ) M_free(AN.FunScratch, "FunScratch");
00526     AN.FunScratch = newpoin;
00527     AN.DumFunPlace = newpoin + AN.NumFound;
00528
00529     newnum = (WORD *)Malloca1(newsize*sizeof(WORD), "RenumScratch");
00530     for ( i = 0; i < AN.NumFound; i++ ) newnum[i] = AN.RenumScratch[i];
00531     for ( ; i < newsize; i++ ) newnum[i] = 0;
00532     if ( AN.RenumScratch ) M_free(AN.RenumScratch, "RenumScratch");
00533     AN.RenumScratch = newnum;
00534     AN.DumFound = newnum + AN.NumFound;
00535
00536     AN.MaxRenumScratch = newsize;
00537 }
00538
00539 /*
00540     #] AdjustRenumScratch :
00541     #] Reshuf :
00542     #[ Count :
00543     #[ CountDo :
00544
00545     This function executes the counting action in a count
00546     operation. The return value is the count of the term.
00547     Input is the term and a pointer to the instruction.
00548
00549 */
00550 WORD CountDo(WORD *term, WORD *instruct)
00551 {
00552     WORD *m, *r, i, j, count = 0;
00553     WORD *stopper, *tstop, *r1 = 0, *r2 = 0;
00554     m = instruct;
00555     stopper = m + m[1];
00556     instruct += 3;
00557     tstop = term + *term; tstop -= ABS(tstop[-1]); term++;
00558     while ( term < tstop ) {
00559         switch ( *term ) {
00560             case SYMBOL:
00561                 i = term[1] - 2;
00562                 term += 2;
00563                 while ( i > 0 ) {

```

```

00566         m = instruct;
00567         while ( m < stopper ) {
00568             if ( *m == SYMBOL && m[2] == *term ) {
00569                 count += m[3] * term[1];
00570             }
00571             m += m[1];
00572         }
00573         term += 2;
00574         i -= 2;
00575     }
00576     break;
00577 case DOTPRODUCT:
00578     i = term[1] - 2;
00579     term += 2;
00580     while ( i > 0 ) {
00581         m = instruct;
00582         while ( m < stopper ) {
00583             if ( *m == DOTPRODUCT && ( ( m[2] == *term &&
00584                 m[3] == term[1]) || ( m[2] == term[1] &&
00585                 m[3] == *term ) ) ) {
00586                 count += m[4] * term[2];
00587                 break;
00588             }
00589             m += m[1];
00590         }
00591         m = instruct;
00592         while ( m < stopper ) {
00593             if ( *m == VECTOR && m[2] == *term &&
00594                 ( m[3] & DOTPBIT ) != 0 ) {
00595                 count += m[m[1]-1] * term[2];
00596             }
00597             m += m[1];
00598         }
00599         m = instruct;
00600         while ( m < stopper ) {
00601             if ( *m == VECTOR && m[2] == term[1] &&
00602                 ( m[3] & DOTPBIT ) != 0 ) {
00603                 count += m[m[1]-1] * term[2];
00604             }
00605             m += m[1];
00606         }
00607         term += 3;
00608         i -= 3;
00609     }
00610     break;
00611 case INDEX:
00612     j = 1;
00613     goto VectInd;
00614 case VECTOR:
00615     j = 2;
00616 VectInd:
00617     i = term[1] - 2;
00618     term += 2;
00619     while ( i > 0 ) {
00620         m = instruct;
00621         while ( m < stopper ) {
00622             if ( *m == VECTOR && m[2] == *term &&
00623                 ( m[3] & VECTBIT ) != 0 ) {
00624                 count += m[m[1]-1];
00625             }
00626             m += m[1];
00627         }
00628         term += j;
00629         i -= j;
00630     }
00631     break;
00632 default:
00633     if ( *term >= FUNCTION ) {
00634         i = *term;
00635         m = instruct;
00636         while ( m < stopper ) {
00637             if ( *m == FUNCTION && m[2] == i ) count += m[3];
00638             m += m[1];
00639         }
00640         if ( functions[i-FUNCTION].spec >= TENSORFUNCTION ) {
00641             i = term[1] - FUNHEAD;
00642             term += FUNHEAD;
00643             while ( i > 0 ) {
00644                 if ( *term < 0 ) {
00645                     m = instruct;
00646                     while ( m < stopper ) {
00647                         if ( *m == VECTOR && m[2] == *term &&
00648                             ( m[3] & FUNBIT ) != 0 ) {
00649                             count += m[m[1]-1];
00650                         }
00651                         m += m[1];
00652                     }

```

```

00653             term++;
00654             i--;
00655         }
00656     }
00657     else {
00658         r = term + term[1];
00659         term += FUNHEAD;
00660         while ( term < r ) {
00661             if ( ( *term == -INDEX || *term == -VECTOR
00662                 || *term == -MINVECTOR ) && term[1] < MINSPEC ) {
00663                 m = instruct;
00664                 while ( m < stopper ) {
00665                     if ( *m == VECTOR && term[1] == m[2]
00666                         && ( m[3] & SETBIT ) != 0 ) {
00667                         r1 = SetElements + Sets[m[4]].first;
00668                         r2 = SetElements + Sets[m[4]].last;
00669                         while ( r1 < r2 ) {
00670                             if ( *r1 == i ) {
00671                                 count += m[m[1]-1];
00672                                 goto NextFF;
00673                             }
00674                             r1++;
00675                         }
00676                     }
00677                     m += m[1];
00678                 }
00679 NextFF:
00680                 term += 2;
00681             }
00682             else { NEXTARG(term) }
00683         }
00684     }
00685     break;
00686 }
00687 else {
00688     term += term[1];
00689 }
00690 break;
00691 }
00692 }
00693 return(count);
00694 }
00695
00696 /*
00697 #] CountDo :
00698 #[ CountFun :
00699
00700 This is the count function.
00701 The return value is the count of the term.
00702 Input is the term and a pointer to the count function.
00703
00704 */
00705
00706 WORD CountFun(WORD *term, WORD *countfun)
00707 {
00708     WORD *m, *r, i, j, count = 0, *instruct, *stopper, *tstop;
00709     m = countfun;
00710     stopper = m + m[1];
00711     instruct = countfun + FUNHEAD;
00712     tstop = term + *term; tstop -= ABS(tstop[-1]); term++;
00713     while ( term < tstop ) {
00714         switch ( *term ) {
00715             case SYMBOL:
00716                 i = term[1] - 2;
00717                 term += 2;
00718                 while ( i > 0 ) {
00719                     m = instruct;
00720                     while ( m < stopper ) {
00721                         if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00722                         if ( *m == -SYMBOL && m[1] == *term
00723                             && m[2] == -SNUMBER && ( m + 2 ) < stopper ) {
00724                             count += m[3] * term[1]; m += 4;
00725                         }
00726                         else { NEXTARG(m) }
00727                     }
00728                     term += 2;
00729                     i -= 2;
00730                 }
00731                 break;
00732             case DOTPRODUCT:
00733                 i = term[1] - 2;
00734                 term += 2;
00735                 while ( i > 0 ) {
00736                     m = instruct;
00737                     while ( m < stopper ) {
00738                         if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00739                         if ( *m == 9+ARGHEAD && m[ARGHEAD] == 9

```

```

00740         && m[ARGHEAD+1] == DOTPRODUCT
00741         && m[ARGHEAD+9] == -SNUMBER && ( m + ARGHEAD+9 ) < stopper
00742         && ( ( m[ARGHEAD+3] == *term &&
00743         m[ARGHEAD+4] == term[1] ) ||
00744         ( m[ARGHEAD+3] == term[1] &&
00745         m[ARGHEAD+4] == *term ) ) {
00746             count += m[ARGHEAD+10] * term[2];
00747             m += ARGHEAD+11;
00748         }
00749         else { NEXTARG(m) }
00750     }
00751     m = instruct;
00752     while ( m < stopper ) {
00753         if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00754         if ( ( *m == -VECTOR || *m == -MINVECTOR )
00755         && m[1] == *term &&
00756         m[2] == -SNUMBER && ( m+2 ) < stopper ) {
00757             count += m[3] * term[2]; m += 4;
00758         }
00759         NEXTARG(m)
00760     }
00761     m = instruct;
00762     while ( m < stopper ) {
00763         if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00764         if ( ( *m == -VECTOR || *m == -MINVECTOR )
00765         && m[1] == term[1] &&
00766         m[2] == -SNUMBER && ( m+2 ) < stopper ) {
00767             count += m[3] * term[2];
00768             m += 4;
00769         }
00770         NEXTARG(m)
00771     }
00772     term += 3;
00773     i -= 3;
00774 }
00775 break;
00776 case INDEX:
00777     j = 1;
00778     goto VectInd;
00779 case VECTOR:
00780     j = 2;
00781 VectInd:
00782     i = term[1] - 2;
00783     term += 2;
00784     while ( i > 0 ) {
00785         m = instruct;
00786         while ( m < stopper ) {
00787             if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00788             if ( ( *m == -VECTOR || *m == -MINVECTOR )
00789             && m[1] == *term &&
00790             m[2] == -SNUMBER && ( m+2 ) < stopper ) {
00791                 count += m[3]; m += 4;
00792             }
00793             NEXTARG(m)
00794         }
00795         term += j;
00796         i -= j;
00797     }
00798     break;
00799 default:
00800     if ( *term >= FUNCTION ) {
00801         i = *term;
00802         m = instruct;
00803         while ( m < stopper ) {
00804             if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00805             if ( *m == -i && m[1] == -SNUMBER && ( m+1 ) < stopper ) {
00806                 count += m[2]; m += 3;
00807             }
00808             NEXTARG(m)
00809         }
00810         if ( functions[i-FUNCTION].spec >= TENSORFUNCTION ) {
00811             i = term[1] - FUNHEAD;
00812             term += FUNHEAD;
00813             while ( i > 0 ) {
00814                 if ( *term < 0 ) {
00815                     m = instruct;
00816                     while ( m < stopper ) {
00817                         if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00818                         if ( ( *m == -VECTOR || *m == -INDEX
00819                         || *m == -MINVECTOR ) && m[1] == *term &&
00820                         m[2] == -SNUMBER && ( m+2 ) < stopper ) {
00821                             count += m[3]; m += 4;
00822                         }
00823                         else { NEXTARG(m) }
00824                     }
00825                 }
00826                 term++;
00827                 i--;

```

```

00827     }
00828     }
00829     else {
00830         r = term + term[1];
00831         term += FUNHEAD;
00832         while ( term < r ) {
00833             if ( ( *term == -INDEX || *term == -VECTOR
00834                 || *term == -MINVECTOR ) && term[1] < MINSPEC ) {
00835                 m = instruct;
00836                 while ( m < stopper ) {
00837                     if ( *m == -SNUMBER ) { NEXTARG(m) continue; }
00838                     if ( *m == -VECTOR && m[1] == term[1]
00839                         && m[2] == -SNUMBER && (m+2) < stopper ) {
00840                         count += m[3];
00841                         m += 4;
00842                     }
00843                     else { NEXTARG(m) }
00844                 }
00845                 term += 2;
00846             }
00847             else { NEXTARG(term) }
00848         }
00849     }
00850     break;
00851 }
00852 else {
00853     term += term[1];
00854 }
00855 break;
00856 }
00857 }
00858 return(count);
00859 }
00860
00861 /*
00862     #] CountFun :
00863     #] Count :
00864     #[ DimensionSubterm :
00865 */
00866
00867 WORD DimensionSubterm(WORD *subterm)
00868 {
00869     WORD *r, *rstop, dim, i;
00870     LONG x = 0;
00871     rstop = subterm + subterm[1];
00872     if ( *subterm == SYMBOL ) {
00873         r = subterm + 2;
00874         while ( r < rstop ) {
00875             if ( *r <= NumSymbols && *r > -MAXPOWER ) {
00876                 dim = symbols[*r].dimension;
00877                 if ( dim == MAXPOSITIVE ) goto undefined;
00878                 x += dim * r[1];
00879                 if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00880                 r += 2;
00881             }
00882             else if ( *r <= MAXVARIABLES ) {
00883                 /*
00884                     Here we have an extra symbol. Store dimension in the compiler buffer
00885                 */
00886                 i = MAXVARIABLES - *r;
00887                 dim = cbuf[AM.sbufnum].dimension[i];
00888                 if ( dim == MAXPOSITIVE ) goto undefined;
00889                 if ( dim == -MAXPOSITIVE ) goto outofrange;
00890                 x += dim * r[1];
00891                 if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00892                 r += 2;
00893             }
00894             else { r += 2; }
00895         }
00896     }
00897     else if ( *subterm == DOTPRODUCT ) {
00898         r = subterm + 2;
00899         while ( r < rstop ) {
00900             dim = vectors[*r-AM.OffsetVector].dimension;
00901             if ( dim == MAXPOSITIVE ) goto undefined;
00902             x += dim * r[2];
00903             if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00904             dim = vectors[r[1]-AM.OffsetVector].dimension;
00905             if ( dim == MAXPOSITIVE ) goto undefined;
00906             x += dim * r[2];
00907             if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00908             r += 3;
00909         }
00910     }
00911     else if ( *subterm == VECTOR ) {
00912         r = subterm + 2;
00913         while ( r < rstop ) {

```

```

00914         dim = vectors[*r-AM.OffsetVector].dimension;
00915         if ( dim == MAXPOSITIVE ) goto undefined;
00916         x += dim;
00917         if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00918         r += 2;
00919     }
00920 }
00921 else if ( *subterm == INDEX ) {
00922     r = subterm + 2;
00923     while ( r < rstop ) {
00924         if ( *r < 0 ) {
00925             dim = vectors[*r-AM.OffsetVector].dimension;
00926             if ( dim == MAXPOSITIVE ) goto undefined;
00927             x += dim;
00928             if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00929         }
00930         r++;
00931     }
00932 }
00933 else if ( *subterm >= FUNCTION ) {
00934     dim = functions[*subterm-FUNCTION].dimension;
00935     if ( dim == MAXPOSITIVE ) goto undefined;
00936     x += dim;
00937     if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00938     if ( functions[*subterm-FUNCTION].spec > 0 ) { /* tensor */
00939         r = subterm + FUNHEAD;
00940         while ( r < rstop ) {
00941             if ( *r < MINSPEC ) {
00942                 dim = vectors[*r-AM.OffsetVector].dimension;
00943                 if ( dim == MAXPOSITIVE ) goto undefined;
00944                 x += dim;
00945                 if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00946             }
00947             r++;
00948         }
00949     }
00950 }
00951 return((WORD)x);
00952 undefined:
00953 return((WORD)MAXPOSITIVE);
00954 outofrange:
00955 return(-(WORD)MAXPOSITIVE);
00956 }
00957 /*
00958 #] DimensionSubterm :
00959 #[ DimensionTerm :
00960
00961 Returns the dimension of the given term.
00962 If there is any variable of which the dimension is not defined
00963 we return the code for undefined which is MAXPOSITIVE
00964 When the value is out of range we return -MAXPOSITIVE
00965 */
00966
00967 WORD DimensionTerm(WORD *term)
00968 {
00969     WORD *t, *tstop, dim;
00970     LONG x = 0;
00971     tstop = term + *term; tstop -= ABS(tstop[-1]);
00972     t = term+1;
00973     while ( t < tstop ) {
00974         dim = DimensionSubterm(t);
00975         if ( dim == MAXPOSITIVE ) goto undefined;
00976         if ( dim == -MAXPOSITIVE ) goto outofrange;
00977         x += dim;
00978         if ( x >= MAXPOSITIVE || x <= -MAXPOSITIVE ) goto outofrange;
00979         t += t[1];
00980     }
00981     return((WORD)x);
00982 undefined:
00983 return((WORD)MAXPOSITIVE);
00984 outofrange:
00985 return(-(WORD)MAXPOSITIVE);
00986 }
00987 /*
00988 #] DimensionTerm :
00989 #[ DimensionExpression :
00990
00991 Returns the dimension of the given expression.
00992 If there is any variable of which the dimension is not defined
00993 we return the code for undefined which is MAXPOSITIVE
00994 When the value is out of range we return -MAXPOSITIVE
00995 When the value is not consistent we return -MAXPOSITIVE.
00996 */
00997
00998 WORD DimensionExpression(PHEAD WORD *expr)

```

```

01001 {
01002     WORD dim, *term, *old, x = 0;
01003     int first = 1;
01004     term = expr;
01005     while ( *term ) {
01006         dim = DimensionTerm(term);
01007         if ( dim == MAXPOSITIVE ) goto undefined;
01008         if ( dim == -MAXPOSITIVE ) goto outofrange;
01009         if ( first ) { x = dim; }
01010         else if ( x != dim ) {
01011             old = AN.currentTerm;
01012             MLOCK(ErrorMessageLock);
01013             MesPrint("Dimension is not the same in the terms of the expression");
01014             term = expr;
01015             while ( *term ) {
01016                 AN.currentTerm = term;
01017                 MesPrint(" %T");
01018             }
01019             MUNLOCK(ErrorMessageLock);
01020             AN.currentTerm = old;
01021             return(-(WORD)MAXPOSITIVE);
01022         }
01023         term += *term;
01024     }
01025     return((WORD)x);
01026 undefined:
01027     return((WORD)MAXPOSITIVE);
01028 outofrange:
01029     old = AN.currentTerm;
01030     AN.currentTerm = term;
01031     MLOCK(ErrorMessageLock);
01032     MesPrint("Dimension out of range in %t in subexpression");
01033     MUNLOCK(ErrorMessageLock);
01034     AN.currentTerm = old;
01035     return(-(WORD)MAXPOSITIVE);
01036 }
01037
01038 /*
01039 #] DimensionExpression :
01040 #[ Multiply Term :
01041     #[ MultDo :
01042 */
01043
01044 int MultDo(PHEAD WORD *term, WORD *pattern)
01045 {
01046     GETBIDENTITY
01047     WORD *t, *r, i;
01048     t = term + *term;
01049     if ( pattern[2] > 0 ) {          /* Left multiply */
01050         i = *term - 1;
01051     }
01052     else {                          /* Right multiply */
01053         i = ABS(t[-1]);
01054     }
01055     *term += SUBEXPSIZE;
01056     r = t + SUBEXPSIZE;
01057     do { *--r = *--t; } while ( --i > 0 );
01058     r = pattern + 3;
01059     i = r[1];
01060     while ( --i >= 0 ) *t++ = *r++;
01061     AT.WorkPointer = term + *term;
01062     return(0);
01063 }
01064
01065 /*
01066 #] MultDo :
01067 #[ Multiply Term :
01068 #[ Try Term(s) :
01069     #[ TryDo :
01070 */
01071
01072 int TryDo(PHEAD WORD *term, WORD *pattern, WORD level)
01073 {
01074     GETBIDENTITY
01075     WORD *t, *r, *m, i, j;
01076     ReNumber(BHEAD term);
01077     Normalize(BHEAD term);
01078     m = r = term + *term;
01079     m++;
01080     i = pattern[2];
01081     t = pattern + 3;
01082     NCOPY(m,t,i)
01083     j = *term - 1;
01084     t = term + 1;
01085     NCOPY(m,t,j)
01086     *r = WORDDIFF(m,r);
01087     AT.WorkPointer = m;

```

```

01088     if ( ( j = Normalize(BHEAD r) ) == 0 || j == 1 ) {
01089         if ( *r == 0 ) return(0);
01090         ReNumber(BHEAD r); Normalize(BHEAD r);
01091         if ( *r == 0 ) return(0);
01092         if ( ( i = CompareTerms(BHEAD term,r,0) ) < 0 ) {
01093             *AN.RepPoint = 1;
01094             AR.expchanged = 1;
01095             return(Generator(BHEAD r,level));
01096         }
01097         if ( i == 0 && CompCoef(term,r) != 0 ) { return(0); }
01098     }
01099     AT.WorkPointer = r;
01100     return(Generator(BHEAD term,level));
01101 }
01102
01103 /*
01104     #] TryDo :
01105     #] Try Term(s) :
01106     #[ Distribute :
01107     #[ DoDistrib :
01108
01109     The routine that generates the terms ordered by a distrib_ function.
01110     The presence of a replaceable distrib_ function has been sensed
01111     in the routine TestSub and has been passed on to Generator.
01112     It is then Generator that calls this function in a way that is
01113     similar to calling the trace routines, except for that for the
01114     trace routines and the Levi-Civita tensors the arguments are put
01115     in temporary storage and here we leave them inside the term,
01116     because there is no knowing how long the field will be.
01117 */
01118
01119 int DoDistrib(PHEAD WORD *term, WORD level)
01120 {
01121     GETBIDENTITY
01122     WORD *t, *m, *r = 0, *stop, *tstop, *termout, *endhead, *starttail, *parms;
01123     WORD i, j, k, n, nn, ntype, fun1 = 0, fun2 = 0, typ1 = 0, typ2 = 0;
01124     WORD *arg, *oldwork, *mf, ktype = 0, atype = 0;
01125     WORD sgn, dirtyflag;
01126     AN.TeInFun = AR.TePos = 0;
01127     t = term;
01128     tstop = t + *t;
01129     stop = tstop - ABS(tstop[-1]);
01130     t++;
01131     while ( t < stop ) {
01132         r = t + t[1];
01133         if ( *t == DISTRIBUTION && t[FUNHEAD] == -SNUMBER
01134             && t[FUNHEAD+1] >= -2 && t[FUNHEAD+1] <= 2
01135             && t[FUNHEAD+2] == -SNUMBER
01136             && t[FUNHEAD+4] <= -FUNCTION
01137             && t[FUNHEAD+5] <= -FUNCTION ) {
01138             WORD *ttt = t+FUNHEAD+6, *tttstop = t+t[1];
01139             while ( ttt < tttstop ) {
01140                 if ( *ttt == -DOLLEXPRESSION ) break;
01141                 NEXTARG(ttt);
01142             }
01143             if ( ttt >= tttstop ) {
01144                 fun1 = -t[FUNHEAD+4];
01145                 fun2 = -t[FUNHEAD+5];
01146                 typ1 = functions[fun1-FUNCTION].spec;
01147                 typ2 = functions[fun2-FUNCTION].spec;
01148                 if ( typ1 > 0 || typ2 > 0 ) {
01149                     m = t + FUNHEAD+6;
01150                     r = t + t[1];
01151                     while ( m < r ) {
01152                         if ( *m != -INDEX && *m != -VECTOR && *m != -MINVECTOR )
01153                             break;
01154                         m += 2;
01155                     }
01156                     if ( m < r ) {
01157                         MLOCK(ErrorMessageLock);
01158                         MesPrint("Incompatible function types and arguments in distrib_");
01159                         MUNLOCK(ErrorMessageLock);
01160                         SETERROR(-1)
01161                     }
01162                 }
01163                 break;
01164             }
01165         }
01166         t = r;
01167     }
01168     dirtyflag = t[2];
01169     ntype = t[FUNHEAD+1];
01170     n = t[FUNHEAD+3];
01171 /*
01172     t points at the distrib_ function to be expanded.
01173     fun1,fun2 and typ1,typ2 are the two functions and their types.
01174     ntype indicates the action:

```



```

01175      0:  Make all possible divisions:  2^nargs
01176      1:  fun1 should get n arguments:  nargs! / ( n! (nargs-n)! )
01177      2:  fun2 should get n arguments:  nargs! / ( n! (nargs-n)! )
01178  The distinction between 1 and two is for noncommuting objects.
01179      3:  fun1 should get n arguments. Super symmetric option.
01180      4:  fun2 idem
01181  The super symmetric option involves:
01182      a:  arguments get sorted
01183      b:  identical arguments are seen as such. Hence not all their
01184          distributions are taken into account. It is as if after the
01185          distrib there is a symmetrize fun1; symmetrize fun2;
01186      c:  Hence if the occurrence of each argument is a,b,c,...
01187          and their occurrence in fun1 is a1,b1,c1,... and in fun2
01188          is a2,b2,c2,... then each term is generated (a1+a2)!/a1!/a2!
01189          (b1+b2)!/b1!/b2! (c1+c2)!/c1!/c2! ... times.
01190      d:  We have to make an array of occurrences and positions.
01191      e:  Then we sort the arguments indirectly.
01192      f:  Next we generate the argument lists in the same way as we
01193          generate powers of expressions with binomials. Hence we need
01194          a third array to keep track of the 'powers'
01195  */
01196      endhead = t;
01197      starttail = r;
01198      parms = m = t + FUNHEAD+6;
01199      i = 0;
01200      while ( m < r ) { /* Count arguments */
01201          i++;
01202          NEXTARG(m);
01203      }
01204      oldwork = AT.WorkPointer;
01205      arg = AT.WorkPointer + 1;
01206      arg[-1] = 0;
01207      termout = arg + i;
01208      switch ( ntype ) {
01209          case 0: ktype = 1; atype = n < 0 ? 1: 0; n = 0; break;
01210          case 1: ktype = 1; atype = 0; break;
01211          case 2: ktype = 0; atype = 0; break;
01212          case -1: ktype = 1; atype = 1; break;
01213          case -2: ktype = 0; atype = 1; break;
01214      }
01215      do {
01216  /*
01217          All distributions with n elements. We generate the array arg with
01218          all possible 1 and 0 patterns. 1 means in fun1 and 0 means in fun2.
01219  */
01220          if ( n > i ) return(0); /* 0 elements */
01221
01222          for ( j = 0; j < n; j++ ) arg[j] = 1;
01223          for ( j = n; j < i; j++ ) arg[j] = 0;
01224          for(;;) {
01225              sgn = 0;
01226              t = term;
01227              m = termout;
01228              while ( t < endhead ) *m++ = *t++;
01229              mf = m;
01230              *m++ = fun1;
01231              *m++ = FUNHEAD;
01232              *m++ = dirtyflag;
01233              #if FUNHEAD > 3
01234                  k = FUNHEAD -3;
01235                  while ( k-- > 0 ) *m++ = 0;
01236              #endif
01237              r = parms;
01238              for ( k = 0; k < i; k++ ) {
01239                  if ( arg[k] == ktype ) {
01240                      if ( *r <= -FUNCTION ) *m++ = *r++;
01241                      else if ( *r < 0 ) {
01242                          if ( typ1 > 0 ) {
01243                              if ( *r == -MINVECTOR ) sgn ^= 1;
01244                              r++;
01245                              *m++ = *r++;
01246                          }
01247                          else { *m++ = *r++; *m++ = *r++; }
01248                      }
01249                      else {
01250                          nn = *r;
01251                          NCOPY(m,r,nn);
01252                      }
01253                  }
01254                  else { NEXTARG(r) }
01255              }
01256              mf[1] = WORDDIFF(m,mf);
01257              mf = m;
01258              *m++ = fun2;
01259              *m++ = FUNHEAD;
01260              *m++ = dirtyflag;
01261              #if FUNHEAD > 3

```

```

01262         k = FUNHEAD -3;
01263         while ( k-- > 0 ) *m++ = 0;
01264     #endif
01265     r = parms;
01266     for ( k = 0; k < i; k++ ) {
01267         if ( arg[k] != ktype ) {
01268             if ( *r <= -FUNCTION ) *m++ = *r++;
01269             else if ( *r < 0 ) {
01270                 if ( typ2 > 0 ) {
01271                     if ( *r == -MINVECTOR ) sgn ^= 1;
01272                     r++;
01273                     *m++ = *r++;
01274                 }
01275                 else { *m++ = *r++; *m++ = *r++; }
01276             }
01277             else {
01278                 nn = *r;
01279                 NCOPY(m,r,nn);
01280             }
01281         }
01282         else { NEXTARG(r) }
01283     }
01284     mf[1] = WORDDIF(m,mf);
01285     #ifndef NUOVO
01286     if ( atype == 0 ) {
01287         WORD k1,k2;
01288         for ( k = 0; k < i-1; k++ ) {
01289             if ( arg[k] == 0 ) continue;
01290             k1 = 1; k2 = k;
01291             while ( k < i-1 && EqualArg(parms,k,k+1) ) { k++; k1++; }
01292             while ( k2 <= k && arg[k2] == 1 ) k2++;
01293             k2 = k-k2+1;
01294             /*
01295             Now we need k1!/(k2! (k1-k2)!)
01296             */
01297             if ( k2 != k1 && k2 != 0 ) {
01298                 if ( GetBinom((UWORD *)m+3,m+2,k1,k2) ) {
01299                     MLOCK(ErrorMessageLock);
01300                     MesCall("DoDistrib");
01301                     MUNLOCK(ErrorMessageLock);
01302                     SETERROR(-1)
01303                 }
01304                 m[1] = ( m[2] < 0 ? -m[2]: m[2] ) + 3;
01305                 *m = LNUMBER;
01306                 m += m[1];
01307             }
01308         }
01309     }
01310 #endif
01311     r = starttail;
01312     while ( r < tstop ) *m++ = *r++;
01313
01314     if ( atype ) { /* antisymmetric field */
01315         k = n;
01316         nn = 0;
01317         for ( j = 0; j < i && k > 0; j++ ) {
01318             if ( arg[j] == 1 ) k--;
01319             else nn += k;
01320         }
01321         sgn ^= nn & 1;
01322     }
01323
01324     if ( sgn ) m[-1] = -m[-1];
01325     *termout = WORDDIF(m,termout);
01326     AT.WorkPointer = m;
01327     if ( AT.WorkPointer > AT.WorkTop ) {
01328         MLOCK(ErrorMessageLock);
01329         MesWork();
01330         MUNLOCK(ErrorMessageLock);
01331         return(-1);
01332     }
01333     *AN.RepPoint = 1;
01334     AR.expchanged = 1;
01335     if ( Generator(BHEAD termout,level) ) Terminate(-1);
01336 #ifndef NUOVO
01337     {
01338         WORD k1;
01339         j = i - 1;
01340         k = 0;
01341         redok: while ( arg[j] == 1 && j >= 0 ) { j--; k++; }
01342         while ( arg[j] == 0 && j >= 0 ) j--;
01343         if ( j < 0 ) break;
01344         k1 = j;
01345         arg[j] = 0;
01346         while ( !atype && EqualArg(parms,j,j+1) ) {
01347             j++;
01348             if ( j >= i - k - 1 ) { j = k1; k++; goto redok; }

```

```

01349         arg[j] = 0;
01350     }
01351     while ( k >= 0 ) { j++; arg[j] = 1; k--; }
01352     j++;
01353     while ( j < i ) { arg[j] = 0; j++; }
01354 }
01355 #else
01356     j = i - 1;
01357     k = 0;
01358     while ( arg[j] == 1 && j >= 0 ) { j--; k++; }
01359     while ( arg[j] == 0 && j >= 0 ) j--;
01360     if ( j < 0 ) break;
01361     arg[j] = 0;
01362     while ( k >= 0 ) { j++; arg[j] = 1; k--; }
01363     j++;
01364     while ( j < i ) { arg[j] = 0; j++; }
01365 #endif
01366 }
01367 } while ( ntype == 0 && ++n <= i );
01368 AT.WorkPointer = oldwork;
01369 return(0);
01370 }
01371
01372 /*
01373     #] DoDistrib :
01374     #[ EqualArg :
01375
01376     Returns 1 if the arguments in the field are identical.
01377 */
01378
01379 int EqualArg(WORD *parms, WORD num1, WORD num2)
01380 {
01381     WORD *t1, *t2;
01382     WORD i;
01383     t1 = parms;
01384     while ( --num1 >= 0 ) { NEXTARG(t1); }
01385     t2 = parms;
01386     while ( --num2 >= 0 ) { NEXTARG(t2); }
01387     if ( *t1 != *t2 ) return(0);
01388     if ( *t1 < 0 ) {
01389         if ( *t1 <= -FUNCTION || t1[1] == t2[1] ) return(1);
01390         return(0);
01391     }
01392     i = *t1;
01393     while ( --i >= 0 ) {
01394         if ( *t1 != *t2 ) return(0);
01395         t1++; t2++;
01396     }
01397     return(1);
01398 }
01399
01400 /*
01401     #] EqualArg :
01402     #[ DoDelta3 :
01403 */
01404
01405 int DoDelta3(PHEAD WORD *term, WORD level)
01406 {
01407     GETBIDENTITY
01408     WORD *t, *m, *m1, *m2, *stopper, *tstop, *termout, *dels, *taken;
01409     WORD *ic, *jc, *factors;
01410     WORD num, num2, i, j, k, knum, a;
01411     AN.TeInFun = AR.TePos = 0;
01412     tstop = term + *term;
01413     stopper = tstop - ABS(tstop[-1]);
01414     t = term+1;
01415     while ( ( *t != DELTA3 || ((t[1]-FUNHEAD) & 1) != 0 ) && t < stopper )
01416         t += t[1];
01417     if ( t >= stopper ) {
01418         MLOCK(ErrorMessageLock);
01419         MesPrint("Internal error with dd_ function");
01420         MUNLOCK(ErrorMessageLock);
01421         Terminate(-1);
01422     }
01423     m1 = t; m2 = t + t[1];
01424     num = t[1] - FUNHEAD;
01425     if ( num == 0 ) {
01426         termout = t = AT.WorkPointer;
01427         m = term;
01428         while ( m < m1 ) *t++ = *m++;
01429         m = m2; while ( m < tstop ) *t++ = *m++;
01430         *termout = WORDDIF(t,termout);
01431         AT.WorkPointer = t;
01432         *AN.RepPoint = 1;
01433         AR.expchanged = 1;
01434         if ( Generator(BHEAD termout,level) ) {
01435             MLOCK(ErrorMessageLock);

```

```

01436         MesCall("Do dd_");
01437         MUNLOCK(ErrorMessageLock);
01438         SETERROR(-1)
01439     }
01440     AT.WorkPointer = termout;
01441     return(0);
01442 }
01443 t += FUNHEAD;
01444 /*
01445 Step 1: sort the arguments
01446 */
01447 for ( i = 1; i < num; i++ ) {
01448     if ( t[i] < t[i-1] ) {
01449         a = t[i]; t[i] = t[i-1]; t[i-1] = a;
01450         j = i - 1;
01451         while ( j > 0 ) {
01452             if ( t[j] >= t[j-1] ) break;
01453             a = t[j]; t[j] = t[j-1]; t[j-1] = a;
01454             j--;
01455         }
01456     }
01457 }
01458 /*
01459 Step 2: Order them by occurrence
01460 In 'taken' we have the array with the number of occurrences.
01461 in 'dels' is the type of object.
01462 */
01463 m = taken = AT.WorkPointer;
01464 for ( i = 0; i < num; i++ ) *m++ = 0;
01465 dels = m; knum = 0;
01466 for ( i = 0; i < num; knum++ ) {
01467     *m++ = t[i]; i++; taken[knum] = 1;
01468     while ( i < num ) {
01469         if ( t[i] != t[i-1] ) break;
01470         i++; (taken[knum])++;
01471     }
01472 }
01473 for ( i = 0; i < knum; i++ ) *m++ = taken[i];
01474 ic = m; num2 = num/2;
01475 jc = ic + num2;
01476 factors = jc + num2;
01477 termout = factors + num2;
01478 /*
01479 The recursion has num/2 steps
01480 */
01481 k = 0;
01482 while ( k >= 0 ) {
01483     if ( k >= num2 ) {
01484         t = termout; m = term;
01485         while ( m < m1 ) *t++ = *m++;
01486         *t++ = DELTA; *t++ = num+2;
01487         for ( i = 0; i < num2; i++ ) {
01488             *t++ = dels[ic[i]]; *t++ = dels[jc[i]];
01489         }
01490         for ( i = 0; i < num2; i++ ) {
01491             if ( ic[i] == jc[i] ) {
01492                 j = 1;
01493                 while ( i < num2-1 && ic[i] == ic[i+1] && ic[i] == jc[i+1] )
01494                     { i++; j++; }
01495                 for ( a = 1; a < j; a++ ) {
01496                     *t++ = SNUMBER; *t++ = 4; *t++ = 2*a+1; *t++ = 1;
01497                 }
01498                 for ( a = 0; a+1+i < num2; a++ ) {
01499                     if ( ic[a+i] != ic[a+i+1] ) break;
01500                 }
01501                 if ( a > 0 ) {
01502                     if ( GetBinom((UWORD *) (t+3), t+2, 2*j+a, a) ) {
01503                         MLOCK(ErrorMessageLock);
01504                         MesCall("Do dd_");
01505                         MUNLOCK(ErrorMessageLock);
01506                         SETERROR(-1)
01507                     }
01508                     t[1] = ( t[2] < 0 ? -t[2]: t[2] ) + 3;
01509                     *t = LNUMBER;
01510                     t += t[1];
01511                 }
01512             }
01513             else if ( factors[i] != 1 ) {
01514                 *t++ = SNUMBER; *t++ = 4; *t++ = factors[i]; *t++ = 1;
01515             }
01516         }
01517         for ( i = 0; i < num2-1; i++ ) {
01518             if ( ic[i] == jc[i] ) continue;
01519             j = 1;
01520             while ( i < num2-1 && jc[i] == jc[i+1] && ic[i] == ic[i+1] ) {
01521                 i++; j++;
01522             }

```

```

01523         for ( a = 0; a+i < num2-1; a++ ) {
01524             if ( ic[i+a] != ic[i+a+1] ) break;
01525         }
01526         if ( a > 0 ) {
01527             if ( GetBinom((UWORD *) (t+3),t+2,j+a,a) ) {
01528                 MLOCK(ErrorMessageLock);
01529                 MesCall("Do dd_");
01530                 MUNLOCK(ErrorMessageLock);
01531                 SETERROR(-1)
01532             }
01533             t[1] = ( t[2] < 0 ? -t[2]: t[2] ) + 3;
01534             *t = LNUMBER;
01535             t += t[1];
01536         }
01537     }
01538     m = m2;
01539     while ( m < tstop ) *t++ = *m++;
01540     *termout = WORDDIFF(t,termout);
01541     AT.WorkPointer = t;
01542     *AN.RepPoint = 1;
01543     AR.expchanged = 1;
01544     if ( Generator(BHEAD termout,level) ) {
01545         MLOCK(ErrorMessageLock);
01546         MesCall("Do dd_");
01547         MUNLOCK(ErrorMessageLock);
01548         SETERROR(-1)
01549     }
01550     k--;
01551     if ( k >= 0 ) goto nextj;
01552     else break;
01553 }
01554 for ( ic[k] = 0; ic[k] < knum; ic[k]++ ) {
01555     if ( taken[ic[k]] > 0 ) break;
01556 }
01557 if ( k > 0 && ic[k-1] == ic[k] ) jc[k] = jc[k-1];
01558 else jc[k] = ic[k];
01559 for ( ; jc[k] < knum; jc[k]++ ) {
01560     if ( taken[jc[k]] <= 0 ) continue;
01561     if ( ic[k] == jc[k] ) {
01562         if ( taken[jc[k]] <= 1 ) continue;
01563     /*
01564         factors[k] = taken[ic[k]];
01565         if ( ( factors[k] & 1 ) == 0 ) (factors[k])--;
01566     */
01567         taken[ic[k]] -= 2;
01568     }
01569     else {
01570         factors[k] = taken[jc[k]];
01571         (taken[ic[k]])--; (taken[jc[k]])--;
01572     }
01573     k++;
01574     goto nextk; /* This is the simulated recursion */
01575 nextj::
01576     (taken[ic[k]])++; (taken[jc[k]])++;
01577 }
01578 k--;
01579 if ( k >= 0 ) goto nextj;
01580 nextk::
01581 }
01582 AT.WorkPointer = taken;
01583 return(0);
01584 }
01585
01586 /*
01587 #] DoDelta3 :
01588 #[ TestPartitions :
01589
01590 Checks whether the function in tfun is a partitions_ function
01591 that can be expanded. If it can a number of relevant objects is
01592 inside the struct parti.
01593 This test is not entirely trivial because there are many restrictions
01594 w.r.t. the arguments.
01595 Syntax (still to be implemented)
01596 partitions_(number_of_partition_entries,[function,number,]^nope,arguments)
01597 [function,number,]: can be
01598     f,3     for a partition of 3 arguments
01599     f,0     for the remaining arguments (should be last)
01600     num1,f,num2 with num1 effectively a number of partitions but this
01601                counts as num1 entries.
01602     0,f,num2: all partitions have num2 arguments. No number of partition
01603                entries needed. If num2 does not divide the number of
01604                arguments there will be no action.
01605 */
01606
01607 int TestPartitions(WORD *tfun, PARTI *parti)
01608 {
01609     WORD *tnext = tfun + tfun[1];

```

```

01610     WORD *t, *tt;
01611     WORD argcount = 0, sum = 0, i, ipart, argremain;
01612     WORD tensorflag = 0;
01613     parti->psize = parti->nfun = parti->args = parti->nargs = 0;
01614     parti->numargs = parti->numpart = parti->where = 0;
01615     tt = t = tfun + FUNHEAD;
01616     while ( t < tnext ) { argcount++; NEXTARG(t); }
01617     if ( argcount < 1 ) goto No;
01618     t = tt;
01619     if ( *t != -SNUMBER ) goto No;
01620     if ( t[1] == 0 ) {
01621         t += 2;
01622         if ( *t <= -FUNCTION && t[1] == -SNUMBER && t[2] > 0 ) {
01623             if ( functions[-*t-FUNCTION].spec > 0 ) tensorflag = 1;
01624             if ( argcount-3 < 0 ) goto No;
01625             if ( ( argcount-3 ) % t[2] != 0 ) goto No;
01626         }
01627         else goto No;
01628         parti->numpart = (argcount-3)/t[2];
01629         parti->numargs = argcount - 3;
01630         parti->psize = (WORD *)Malloc1((parti->numpart*2+parti->numargs*2+2)
01631             *sizeof(WORD),"partitions");
01632         parti->nfun = parti->psize + parti->numpart;
01633         parti->args = parti->nfun + parti->numpart;
01634         parti->nargs = parti->args + parti->numargs;
01635         for ( i = 0; i < parti->numpart; i++ ) {
01636             parti->psize[i] = t[2];
01637             parti->nfun[i] = -t[0];
01638         }
01639         t += 3;
01640     }
01641     else if ( t[1] > 0 ) { /* Number of partitions */
01642     /*
01643         We can have sequences of function,number for one partition
01644         or number1,function,number2 for number1 partitions of size number2.
01645         The last partition can have number=0. It must be a single partition
01646         and it will take all remaining arguments.
01647         If any of the functions is a tensor, all arguments must be either
01648         vector or index.
01649     */
01650         parti->numpart = t[1]; t += 2;
01651         ipart = sum = 0; argremain = argcount - 1;
01652     /*
01653         At this point is seems better to make an allocation already that
01654         may be too big. The alternative is having to pass this code twice.
01655     */
01656         parti->psize = (WORD *)Malloc1((argcount*4+2)*sizeof(WORD),"partitions");
01657         parti->nfun = parti->psize+argcount;
01658         parti->args = parti->nfun+argcount;
01659         parti->nargs = parti->args+argcount;
01660         while ( ipart < parti->numpart ) {
01661             if ( *t <= -FUNCTION && t[1] == -SNUMBER && t[2] >= 0 ) {
01662                 if ( functions[-*t-FUNCTION].spec > 0 ) tensorflag = 1;
01663                 if ( t[2] == 0 ) {
01664                     if ( ipart+1 != parti->numpart ) goto WhatAPity;
01665                     argremain -= 2;
01666                     parti->nfun[ipart] = -*t;
01667                     parti->psize[ipart++] = argremain-sum;
01668                     ipart++;
01669                     sum = argremain;
01670                 }
01671                 else {
01672                     parti->nfun[ipart] = -*t;
01673                     parti->psize[ipart++] = t[2];
01674                     argremain -= 2;
01675                     sum += t[2];
01676                 }
01677                 t += 3;
01678             }
01679             else if ( *t == -SNUMBER && t[1] > 0 && ipart+t[1] <= parti->numpart
01680                 && t[2] <= -FUNCTION && t[3] == -SNUMBER && t[4] > 0 ) {
01681                 if ( functions[-t[2]-FUNCTION].spec > 0 ) tensorflag = 1;
01682                 argremain -= 3;
01683                 for ( i = 0; i < t[1]; i++ ) {
01684                     parti->nfun[ipart] = -t[2];
01685                     parti->psize[ipart++] = t[4];
01686                     sum += t[4];
01687                 }
01688                 if ( sum > argremain ) goto WhatAPity;
01689                 t += 5;
01690             }
01691             else goto WhatAPity;
01692         }
01693         if ( sum != argremain ) goto WhatAPity;
01694         parti->numargs = argremain;
01695     }
01696     else goto No;

```

```

01697 /*
01698     Now load the offsets of the arguments and check if needed whether OK with tensor
01699 */
01700 for ( i = 0; i < parti->numargs; i++ ) {
01701     parti->args[i] = t - tfun;
01702     if ( tensorflag && ( *t != -VECTOR && *t != -INDEX ) ) goto WhatAPity;
01703     NEXTARG(t);
01704 }
01705 return(1);
01706 WhatAPity:
01707     M_free(parti->psize,"partitions");
01708     parti->psize = parti->nfun = parti->args = parti->nargs = 0;
01709     parti->numargs = parti->numpart = parti->where = 0;
01710 No:
01711     return(0);
01712 }
01713
01714 /*
01715     #] TestPartitions :
01716     #[ DoPartitions :
01717
01718     As we have only one AT.partitions we need to copy it locally
01719     if we keep needing it.
01720 */
01721
01722 int DoPartitions(PHEAD WORD *term, WORD level)
01723 {
01724     WORD x, i, j, im, *fun, ndiff, siz, tensorflag = 0;
01725     PARTI part = AT.partitions;
01726     WORD *array, **j3, **j3fill, **j3where;
01727     WORD a, pfill, *j2, *j2fill, j3size, ncoeff, ncoeffnum, nfac, ncoeff2, ncoeff3, n;
01728     UWORD *coeff, *coeffnum, *cfac, *coeff2, *coeff3, *c;
01729     /* Make AT.partitions ready for future use (if there is another function) */
01730     AT.partitions.psize = AT.partitions.nfun = AT.partitions.args = AT.partitions.nargs = 0;
01731     AT.partitions.numargs = AT.partitions.numpart = AT.partitions.where = 0;
01732 /*
01733     Start with bubble sorting the list of arguments. And the list of partitions.
01734 */
01735     fun = term + part.where;
01736     if ( functions[*fun-FUNCTION].spec > 0 ) tensorflag = 1;
01737     for ( i = 1; i < part.numargs; i++ ) {
01738         for ( j = i-1; j >= 0; j-- ) {
01739             if ( CompArg(fun+part.args[j+1],fun+part.args[j]) >= 0 ) break;
01740             x = part.args[j+1]; part.args[j+1] = part.args[j]; part.args[j] = x;
01741         }
01742     }
01743     for ( i = 1; i < part.numpart; i++ ) {
01744         for ( j = i-1; j >= 0; j-- ) {
01745             if ( part.psize[j+1] < part.psize[j] ) break;
01746             if ( part.psize[j+1] == part.psize[j] && part.nfun[j+1] <= part.nfun[j] ) break;
01747             x = part.psize[j+1]; part.psize[j+1] = part.psize[j]; part.psize[j] = x;
01748             x = part.nfun[j+1]; part.nfun[j+1] = part.nfun[j]; part.nfun[j] = x;
01749         }
01750     }
01751 /*
01752     Now we have the partitions sorted from high to low and the arguments
01753     have been sorted the regular way arguments are sorted in a symmetrize.
01754     The important thing is that identical arguments are adjacent.
01755     Assign the numbers (identical arguments have identical numbers).
01756 */
01757     ndiff = 1; part.nargs[0] = ndiff;
01758     for ( i = 1; i < part.numargs; i++ ) {
01759         if ( CompArg(fun+part.args[i],fun+part.args[i-1]) != 0 ) ndiff++;
01760         part.nargs[i] = ndiff;
01761     }
01762     part.nargs[part.numargs] = 0;
01763     coeffnum = NumberMalloc("partitionsn");
01764     coeff = NumberMalloc("partitions");
01765     coeff2 = NumberMalloc("partitions2");
01766     coeff3 = NumberMalloc("partitions3");
01767     cfac = NumberMalloc("partitions!");
01768     ncoeffnum = 1; coeffnum[0] = 1;
01769 /*
01770     The numerator of the coefficient will be n1!*n2!*...*n(ndiff)!
01771     We compute it only once.
01772 */
01773     j = 0;
01774     for ( i = 1; i <= ndiff; i++ ) {
01775         n = 0;
01776         while ( part.nargs[j] == i ) { n++; j++; }
01777         if ( n > 1 ) { /* 1! needs no attention */
01778             if ( Factorial(BHEAD n, cfac, &nfac) ) Terminate(-1);
01779             if ( MulLong(coeffnum,ncoeffnum,cfac,nfac,coeff2,&ncoeff2) ) Terminate(-1);
01780             c = coeffnum; coeffnum = coeff2; coeff2 = c;
01781             n = ncoeffnum; ncoeffnum = ncoeff2; ncoeff2 = n;
01782         }
01783     }

```

```

01784 /*
01785     Now comes the part where we have to make sure that
01786     a: we generate all partitions.
01787     b: we generate only different partitions.
01788     c: we get the proper combinatorics factor.
01789     Method:
01790     Suppose the largest partition needs n objects and there are m partitions.
01791     We allocate m arrays of n 'digits'. Make in the smaller partitions the
01792     appropriate leading digits zero.
01793     Divide the largest numbers (of the arguments) over the partitions as
01794     leftmost digits (after possible zeroes). The arrays, seen as numbers,
01795     should be such that each is less or equal to its left neighbour. Take the
01796     next largest numbers, etc. This generates unique partitions and all of
01797     them. Because we have a formula for the multiplicity, this should do it.
01798
01799     The general case. At a later stage we might put in a more economical
01800     version for special cases.
01801 */
01802     siz = part.psize[0];
01803     j3size = 2*(part.numpart+1)+2*(part.numargs+1);
01804     array = (WORD *)Malloc1((part.numpart+1)*siz*sizeof(WORD), "parts");
01805     j3 = (WORD **)Malloc1(j3size*sizeof(WORD *), "parts3");
01806     j2 = (WORD *)Malloc1((part.numpart+part.numargs+2)*sizeof(WORD), "parts2");
01807     j3fill = j3+(part.numpart+1);
01808     j3where = j3fill+(part.numpart+1);
01809     for ( i = 0; i < j3size; i++ ) j3[i] = 0;
01810     j2fill = j2+(part.numpart+1);
01811     for ( i = 0; i < part.numargs; i++ ) j2fill[i] = 0;
01812     for ( i = 0; i < part.numpart; i++ ) {
01813         j3[i] = array+i*siz;
01814         for ( j = 0; j < siz; j++ ) j3[i][j] = 0;
01815         j3fill[i] = j3[i]+(siz-part.psize[i]);
01816         j2[i] = part.psize[i]; /* Number of places still available */
01817     }
01818     j3[part.numpart] = array+part.numpart*siz;
01819     j2[part.numpart] = 0;
01820 /*
01821     Now comes a complicated two-level recursion in a and pfill.
01822 */
01823     a = part.numargs-1;
01824     pfill = 0;
01825 /*
01826     We start putting the last number in part.nargs in the first partition in array.
01827     For backtracking we need to know where we put this number. Hence j3where.
01828 */
01829     while ( a < part.numargs ) {
01830         while ( j2[pfill] <= 0 ) {
01831             pfill++;
01832             while ( pfill >= part.numpart ) { /* we have to pop */
01833                 a++;
01834                 if ( a >= part.numargs ) goto Done;
01835                 pfill = j2fill[a];
01836                 j2[pfill]++;
01837                 j3where[a][0] = 0;
01838                 j3fill[pfill]--;
01839                 pfill++;
01840             }
01841         }
01842         j3where[a] = j3fill[pfill];
01843         *(j3fill[pfill])++ = part.nargs[a];
01844         j2[pfill]--; j2fill[a] = pfill;
01845 /*
01846         Now test whether this is allowed.
01847 */
01848         if ( pfill > 0 && part.psize[pfill] == part.psize[pfill-1]
01849             && part.nfun[pfill] == part.nfun[pfill-1] ) { /* First check whether allowed */
01850             for ( im = 0; im < siz; im++ ) {
01851                 if ( j3[pfill-1][im] < j3[pfill][im] ) break;
01852                 if ( j3[pfill-1][im] > j3[pfill][im] ) im = siz;
01853             }
01854             if ( im < siz ) { /* not ordered. undo and raise pfill */
01855                 pfill = j2fill[a];
01856                 j2[pfill]++;
01857                 j3where[a][0] = 0;
01858                 j3fill[pfill]--;
01859                 pfill++;
01860                 continue; /* Note that j2[part.numpart] = 0 */
01861             }
01862         }
01863         a--;
01864         if ( a < 0 ) { /* Solution */
01865 /*
01866             #[ Solution :
01867
01868             Now we compose the output term. The input term contains
01869             three parts: head, partitions_, tail.
01870             partitions_ starts at term+part.where.

```



```

01871      We first put the function parts and worry about the coefficient later.
01872  */
01873      WORD *t, *to, *twhere = term+part.where, *t2, *tend = term+term, *termout;
01874      WORD num, jj, *targ, *tfun;
01875      t2 = twhere+twhere[1];
01876      to = termout = AT.WorkPointer;
01877      if ( termout + *term + part.numpart*FUNHEAD + AM.MaxTal >= AT.WorkTop ) {
01878          return(MesWork());
01879      }
01880      for ( i = 0; i < ncoeffnum; i++ ) coeff[i] = coeffnum[i];
01881      ncoeff = ncoeffnum;
01882      t = term; while ( t < twhere ) *to++ = *t++;
01883  /*
01884      Now the partitions
01885  */
01886      for ( i = 0; i < part.numpart; i++ ) {
01887          tfun = to;
01888          *to++ = part.nfun[i]; to++; FILLFUN(to);
01889          for ( j = 1; j <= part.psize[i]; j++ ) {
01890              num = j3[i][siz-j]; /* now we need an argument with this number */
01891              for ( jj = num-1; jj < part.numargs; jj++ ) {
01892                  if ( part.nargs[jj] == num ) break;
01893              }
01894              targ = part.args[jj]+twhere;
01895              if ( *targ < 0 ) {
01896                  if ( tensorflag ) targ++;
01897                  else if ( *targ > -FUNCTION ) *to++ = *targ++;
01898                  *to++ = *targ++;
01899              }
01900              else { jj = *targ; NCOPY(to,targ,jj); }
01901          }
01902          tfun[1] = to - tfun;
01903      }
01904  /*
01905      Now the denominators of the coefficient
01906      First identical functions/partitions
01907  */
01908      j = 1; n = 1;
01909      while ( j < part.numpart ) {
01910          for ( im = 0; im < siz; im++ ) {
01911              if ( part.nfun[j-1] != part.nfun[j] ) break;
01912              if ( j3[j-1][im] < j3[j][im] ) break;
01913              if ( j3[j-1][im] > j3[j][im] ) im = 2*siz+2;
01914          }
01915          if ( im == siz ) { n++; j++; continue; }
01916          if ( n > 1 ) {
01917              div1: if ( Factorial(BHEAD n, cfac, &nfac) ) Terminate(-1);
01918                  if ( DivLong(coeff,ncoeff,cfac,nfac,coeff2,&ncoeff2,coeff3,&ncoeff3) )
01919                      Terminate(-1);
01920                      c = coeff; coeff = coeff2; coeff2 = c;
01921                      n = ncoeff; ncoeff = ncoeff2; ncoeff2 = n;
01922                      }
01923                      n = 1; j++;
01924                      }
01925                      if ( n > 1 ) goto div1;
01926  /*
01927      Now identical elements inside the partitions
01928  */
01929      for ( i = 0; i < part.numpart; i++ ) {
01930          j = 0; while ( j3[i][j] == 0 ) j++;
01931          n = 1; j++;
01932          while ( j < siz ) {
01933              if ( j3[i][j-1] == j3[i][j] ) { n++; j++; }
01934              else {
01935                  if ( n > 1 ) {
01936                      div2: if ( Factorial(BHEAD n, cfac, &nfac) ) Terminate(-1);
01937                          if ( DivLong(coeff,ncoeff,cfac,nfac,coeff2,&ncoeff2,coeff3,&ncoeff3) )
01938                              Terminate(-1);
01939                              c = coeff; coeff = coeff2; coeff2 = c;
01940                              n = ncoeff; ncoeff = ncoeff2; ncoeff2 = n;
01941                              }
01942                              n = 1; j++;
01943                              }
01944                              if ( n > 1 ) goto div2;
01945  /*
01946      And put this inside the term. Normalize will take care of it.
01947  */
01948      if ( ncoeff != 1 || coeff[0] > 1 ) {
01949          if ( ncoeff == 1 && coeff[0] <= MAXPOSITIVE ) {
01950              *to++ = SNUMBER; *to++ = 4; *to++ = (WORD)(coeff[0]); *to++ = 1;
01951          }
01952          else {
01953              *to++ = LNUMBER; *to++ = ncoeff+3; *to++ = ncoeff;
01954              for ( i = 0; i < ncoeff; i++ ) *to++ = ((WORD *)coeff)[i];
01955          }

```

```

01956         }
01957     /*
01958         And the tail
01959     */
01960     while ( t2 < tend ) *to++ = *t2++;
01961     *termout = to-termout;
01962     AT.WorkPointer = to;
01963     if ( Generator(BHEAD termout,level) ) Terminate(-1);
01964     AT.WorkPointer = termout;
01965 /*
01966     #] Solution :
01967
01968     Now we can pop all a with the lowest value and one more.
01969 */
01970     a = 0;
01971     while ( part.nargs[a] == 1 ) {
01972         pfill = j2fill[a]; j2[pfill]++; j3where[a][0] = 0; j3fill[pfill]--; a++;
01973     }
01974     if ( a < part.numargs ) {
01975         pfill = j2fill[a]; j2[pfill]++; j3where[a][0] = 0; j3fill[pfill]--; a++;
01976     }
01977     a--;
01978     pfill++;
01979 }
01980 else if ( part.nargs[a] == part.nargs[a+1] ) {}
01981 else { pfill = 0; }
01982 }
01983 Done:
01984     M_free(j2,"parts2");
01985     M_free(j3,"parts3");
01986     M_free(array,"parts");
01987     NumberFree(cfac,"partitions!");
01988     NumberFree(coeff3,"partitions3");
01989     NumberFree(coeff2,"partitions2");
01990     NumberFree(coeff,"partitions");
01991     NumberFree(coeffnum,"partitionsn");
01992     M_free(part.psize,"partitions");
01993     part.psize = part.nfun = part.args = part.nargs = 0;
01994     part.numargs = part.numpart = part.where = 0;
01995     return(0);
01996 }
01997
01998 /*
01999     #] DoPartitions :
02000     #] Distribute :
02001     #[ DoPermutations :
02002
02003     Routine replaces the function perm_(f,args) by occurrences of f with
02004     all permutations of the args. This should always fit!
02005 */
02006
02007 int DoPermutations(PHEAD WORD *term, WORD level)
02008 {
02009     PERMP perm;
02010     WORD *oldworkpointer = AT.WorkPointer, *termout = AT.WorkPointer;
02011     WORD *t, *tstop, *tt, *ttstop, odd = 0;
02012     WORD *args[MAXMATCH], nargs, i, first, skip, *to, *from;
02013 /*
02014     Find function and count arguments. Check for odd/even
02015 */
02016     tstop = term+*term; tstop -= ABS(tstop[-1]);
02017     t = term+1;
02018     while ( t < tstop ) {
02019         if ( *t == PERMUTATIONS ) {
02020             if ( t[1] >= FUNHEAD+1 && t[FUNHEAD] <= -FUNCTION ) {
02021                 odd = 0; skip = 1;
02022             }
02023             else if ( t[1] >= FUNHEAD+3 && t[FUNHEAD] == -SNUMBER && t[FUNHEAD+2] <= -FUNCTION ) {
02024                 if ( t[FUNHEAD+1] % 2 == 1 ) odd = -1;
02025                 else odd = 0;
02026                 skip = 3;
02027             }
02028             else { t += t[1]; continue; }
02029             tt = t+FUNHEAD+skip; ttstop = t + t[1];
02030             nargs = 0;
02031             while ( tt < ttstop ) { NEXTARG(tt); nargs++; }
02032             tt = t+FUNHEAD+skip;
02033             if ( nargs > MAXMATCH ) {
02034                 MLOCK(ErrorMessageLock);
02035                 MesPrint("Too many arguments in function perm_. %d! is way too big", (WORD)MAXMATCH);
02036                 MUNLOCK(ErrorMessageLock);
02037                 SETERROR(-1)
02038             }
02039             i = 0;
02040             while ( tt < ttstop ) { args[i++] = tt; NEXTARG(tt); }
02041             perm.n = nargs;
02042             perm.sign = 0;

```

```

02043     perm.objects = args;
02044     first = 1;
02045     while ( (first = PermuteP(&perm,first) ) == 0 ) {
02046 /*
02047         Compose the output term
02048 */
02049         to = termout; from = term;
02050         while ( from < t ) *to++ = *from++;
02051         *to++ = -t[FUNHEAD+skip-1];
02052         *to++ = t[1] - skip;
02053         for ( i = 2; i < FUNHEAD; i++ ) *to++ = t[i];
02054         for ( i = 0; i < nargs; i++ ) {
02055             from = args[i];
02056             COPY1ARG(to,from);
02057         }
02058         from = t+t[1];
02059         tstop = term + *term;
02060         while ( from < tstop ) *to++ = *from++;
02061         if ( odd && ( ( perm.sign & 1 ) != 0 ) ) to[-1] = -to[-1];
02062         *termout = to - termout;
02063         AT.WorkPointer = to;
02064         if ( Generator(BHEAD termout,level) ) Terminate(-1);
02065         AT.WorkPointer = oldworkpointer;
02066     }
02067     return(0);
02068 }
02069 t += t[1];
02070 }
02071 return(0);
02072 }
02073
02074 /*
02075 #] DoPermutations :
02076 #[ DoShuffle :
02077
02078 Merges the arguments of all occurrences of function fun into a
02079 single occurrence of fun. The opposite of Distrib_
02080 Syntax:
02081     Shuffle[,once|all],fun;
02082     Shuffle[,once|all],$fun;
02083 The expansion of the dollar should give a single function.
02084 The dollar is indicated as usual with a negative value.
02085 option = 1 (once): generate identical results only once
02086 option = 0 (all): generate identical results with combinatorics (default)
02087 */
02088
02089 /*
02090 We use the Shuffle routine which has a large amount of combinatorics.
02091 It doesn't have grouped combinatorics as in (0,1,2)*(0,1,3) where the
02092 groups (0,1) also cause double terms.
02093 */
02094
02095 int DoShuffle(WORD *term, WORD level, WORD fun, WORD option)
02096 {
02097     GETIDENTITY
02098     SHvariables SHback, *SH = &(AN.SHvar);
02099     WORD *t1, *t2, *tstop, ncoef, n = fun, *to, *from;
02100     int i, error;
02101     LONG k;
02102     UWORD *newcombi;
02103
02104     if ( n < 0 ) {
02105         if ( ( n = DolToFunction(BHEAD -n) ) == 0 ) {
02106             MLOCK(ErrorMessageLock);
02107             MesPrint("$-variable in merge statement did not evaluate to a function.");
02108             MUNLOCK(ErrorMessageLock);
02109             return(1);
02110         }
02111     }
02112     if ( AT.WorkPointer + 3*(*term) + AM.MaxTal > AT.WorkTop ) {
02113         MLOCK(ErrorMessageLock);
02114         MesWork();
02115         MUNLOCK(ErrorMessageLock);
02116         return(-1);
02117     }
02118
02119     tstop = term + *term;
02120     ncoef = tstop[-1];
02121     tstop -= ABS(ncoef);
02122     t1 = term + 1;
02123     while ( t1 < tstop ) {
02124         if ( ( *t1 == n ) && ( t1+t1[1] < tstop ) && ( t1[1] > FUNHEAD ) ) {
02125             t2 = t1 + t1[1];
02126             if ( t2 >= tstop ) {
02127                 return(Generator(BHEAD term,level));
02128             }
02129             while ( t2 < tstop ) {

```

```

02130         if ( ( *t2 == n ) && ( t2[1] > FUNHEAD ) ) break;
02131         t2 += t2[1];
02132     }
02133     if ( t2 < tstop ) break;
02134 }
02135 t1 += t1[1];
02136 }
02137 if ( t1 >= tstop ) {
02138     return(Generator(BHEAD term,level));
02139 }
02140 *AN.RepPoint = 1;
02141 /*
02142 Now we have two occurrences of the function.
02143 Back up all relevant variables and load all the stuff that needs to be
02144 passed on.
02145 */
02146 SHback = AN.SHvar;
02147 SH->finishuf = &FinishShuffle;
02148 SH->do_uffle = &DoShuffle;
02149 SH->outterm = AT.WorkPointer;
02150 AT.WorkPointer += *term;
02151 SH->stop1 = t1 + t1[1];
02152 SH->stop2 = t2 + t2[1];
02153 SH->thefunction = n;
02154 SH->option = option;
02155 SH->level = level;
02156 SH->incoef = tstop;
02157 SH->nincoef = ncoef;
02158
02159 if ( AN.SHcombi == 0 || AN.SHcombisize == 0 ) {
02160     AN.SHcombisize = 200;
02161     AN.SHcombi = (UWORD *)Malloca(AN.SHcombisize*sizeof(UWORD), "AN.SHcombi");
02162     SH->combilast = 0;
02163     SHback.combilast = 0;
02164 }
02165 else {
02166     SH->combilast += AN.SHcombi[SH->combilast]+1;
02167     if ( SH->combilast >= AN.SHcombisize - 100 ) {
02168         newcombi = (UWORD *)Malloca(2*AN.SHcombisize*sizeof(UWORD), "AN.SHcombi");
02169         for ( k = 0; k < AN.SHcombisize; k++ ) newcombi[k] = AN.SHcombi[k];
02170         M_free(AN.SHcombi, "AN.SHcombi");
02171         AN.SHcombi = newcombi;
02172         AN.SHcombisize *= 2;
02173     }
02174 }
02175 AN.SHcombi[SH->combilast] = 1;
02176 AN.SHcombi[SH->combilast+1] = 1;
02177
02178 i = t1-term; to = SH->outterm; from = term;
02179 NCOPY(to,from,i)
02180 SH->outfun = to;
02181 for ( i = 0; i < FUNHEAD; i++ ) { *to++ = t1[i]; }
02182
02183 error = Shuffle(t1+FUNHEAD,t2+FUNHEAD,to);
02184
02185 AT.WorkPointer = SH->outterm;
02186 AN.SHvar = SHback;
02187 if ( error ) {
02188     MesCall("DoShuffle");
02189     return(-1);
02190 }
02191 return(0);
02192 }
02193
02194 /*
02195 #] DoShuffle :
02196 #[ Shuffle :
02197
02198 How to make shuffles:
02199
02200 We have two lists of arguments. We have to make a single
02201 shuffle of them. All combinations. Doubles should have as
02202 much as possible a combinatorics factor. Sometimes this is
02203 very difficult as in:
02204 (0,1,2)x(0,1,3) = -> (0,1) is a repeated pattern and the
02205 factor on that is difficult
02206 Simple way: (without combinatorics)
02207 repeat id f0(?c)*f(x1?,?a)*f(x2?,?b) =
02208         +f0(?c,x1)*f(?a)*f(x2,?b)
02209         +f0(?c,x2)*f(x1,?a)*f(?b);
02210
02211 Refinement:
02212 if ( x1 == x2 ) check how many more there are of the same.
02213 --> (n1,x) and (n2,x)
02214 id f0(?c)*f1((n1,x),?b)*f2((n2,x),?c) =
02215         +binom_(n1+n2,n1)*f0(?c,(n1+n2,x))*f1(?a)*f2(?b)
02216         +sum_(j,0,n1-1,binom_(n2+j,j)*f0(?c,(j+n2,x))
02217             *f1((n1-j),?a)*f2(?b))*force2

```

```

02217             +sum_(j,0,n2-1,binom_(n1+j,j)*f0(?c,(j+n1,x))
02218                 *f1(?a)*f2((n2-j),?b))*force1
02219     The force operation can be executed directly
02220
02221     The next question is how to program this: recursively or linearly
02222     which would require simulation of a recursion. Recursive is clearest
02223     but we need to pass a number of arguments from the calling routine
02224     to the final routine. This is done with AN.SHvar.
02225
02226     We need space for the accumulation of the combinatoric factors.
02227 */
02228
02229 int Shuffle(WORD *from1, WORD *from2, WORD *to)
02230 {
02231     GETIDENTITY
02232     WORD *t, *fr, *next1, *next2, na, *fn1, *fn2, *tt;
02233     int i, n, n1, n2, j;
02234     LONG combilast;
02235     SHvariables *SH = &(AN.SHvar);
02236     if ( from1 == SH->stop1 && from2 == SH->stop2 ) {
02237         return(FiniShuffle(to));
02238     }
02239     else if ( from1 == SH->stop1 ) {
02240         i = SH->stop2 - from2; t = to; tt = from2; NCOPY(t,tt,i)
02241         return(FiniShuffle(t));
02242     }
02243     else if ( from2 == SH->stop2 ) {
02244         i = SH->stop1 - from1; t = to; tt = from1; NCOPY(t,tt,i)
02245         return(FiniShuffle(t));
02246     }
02247 /*
02248     Compare lead arguments
02249 */
02250     if ( AreArgsEqual(from1,from2) ) {
02251 /*
02252         First find out how many of each
02253 */
02254         next1 = from1; n1 = 1; NEXTARG(next1)
02255         while ( ( next1 < SH->stop1 ) && AreArgsEqual(from1,next1) ) {
02256             n1++; NEXTARG(next1)
02257         }
02258         next2 = from2; n2 = 1; NEXTARG(next2)
02259         while ( ( next2 < SH->stop2 ) && AreArgsEqual(from2,next2) ) {
02260             n2++; NEXTARG(next2)
02261         }
02262         combilast = SH->combilast;
02263 /*
02264         +binom_(n1+n2,n1)*f0(?c,(n1+n2,x))*f1(?a)*f2(?b)
02265 */
02266         t = to;
02267         n = n1 + n2;
02268         while ( --n >= 0 ) { fr = from1; CopyArg(t,fr) }
02269         if ( GetBinom((UWORD *) (t),&na,n1+n2,n1) ) goto shuffcall;
02270         if ( combilast + AN.SHcombi[combilast] + na + 2 >= AN.SHcombisize ) {
02271 /*
02272             We need more memory in this stack. Fortunately this is the
02273             only place where we have to do this, because the other factors
02274             are definitely smaller.
02275             Layout:  size, LongInteger, size, LongInteger, .....
02276             We start pointing at the last one.
02277 */
02278             UWORD *combi = (UWORD *)Malloca(2*AN.SHcombisize*2,"AN.SHcombi");
02279             LONG jj;
02280             for ( jj = 0; jj < AN.SHcombisize; jj++ ) combi[jj] = AN.SHcombi[jj];
02281             AN.SHcombisize *= 2;
02282             M_free(AN.SHcombi,"AN.SHcombi");
02283             AN.SHcombi = combi;
02284         }
02285         if ( MulLong((UWORD *) (AN.SHcombi+combilast+1),AN.SHcombi[combilast],
02286                     (UWORD *) (t),na,
02287                     (UWORD *) (AN.SHcombi+combilast+AN.SHcombi[combilast]+2),
02288                     (WORD *) (AN.SHcombi+combilast+AN.SHcombi[combilast]+1)) ) goto shuffcall;
02289         SH->combilast = combilast + AN.SHcombi[combilast] + 1;
02290         if ( next1 >= SH->stop1 ) {
02291             fr = next2; i = SH->stop2 - fr;
02292             NCOPY(t,fr,i)
02293             if ( FiniShuffle(t) ) goto shuffcall;
02294         }
02295         else if ( next2 >= SH->stop2 ) {
02296             fr = next1; i = SH->stop1 - fr;
02297             NCOPY(t,fr,i)
02298             if ( FiniShuffle(t) ) goto shuffcall;
02299         }
02300         else {
02301             if ( Shuffle(next1,next2,t) ) goto shuffcall;
02302         }
02303         SH->combilast = combilast;

```

```

02304  /*
02305      +sum_(j,0,n1-1,binom_(n2+j,j)*f0(?c,(j+n2,x))
02306      *f1((n1-j),?a)*f2(?b))*force2
02307  */
02308      if ( next2 < SH->stop2 ) {
02309          t = to;
02310          n = n2;
02311          while ( --n >= 0 ) { fr = from1; CopyArg(t,fr) }
02312          for ( j = 0; j < n1; j++ ) {
02313              if ( GetBinom((UWORD *) (t),&na,n2+j,j) ) goto shuffcall;
02314              if ( Mullong((UWORD *) (AN.SHcombi+combilast+1),AN.SHcombi[combilast],
02315                          (UWORD *) (t),na,
02316                          (UWORD *) (AN.SHcombi+combilast+AN.SHcombi[combilast]+2),
02317                          (WORD *) (AN.SHcombi+combilast+AN.SHcombi[combilast]+1)) ) goto shuffcall;
02318              SH->combilast = combilast + AN.SHcombi[combilast] + 1;
02319              if ( j > 0 ) { fr = from1; CopyArg(t,fr) }
02320              fn2 = next2; tt = t;
02321              CopyArg(tt,fn2)
02322          }
02323          if ( fn2 >= SH->stop2 ) {
02324              n = n1-j;
02325              while ( --n >= 0 ) { fr = from1; CopyArg(tt,fr) }
02326              fr = next1; i = SH->stop1 - fr;
02327              NCOPY(tt,fr,i)
02328              if ( FiniShuffle(tt) ) goto shuffcall;
02329          }
02330          else {
02331              n = j; fn1 = from1; while ( --n >= 0 ) { NEXTARG(fn1) }
02332              if ( Shuffle(fn1,fn2,tt) ) goto shuffcall;
02333          }
02334          SH->combilast = combilast;
02335      }
02336  }
02337  /*
02338      +sum_(j,0,n2-1,binom_(n1+j,j)*f0(?c,(j+n1,x))
02339      *f1(?a)*f2((n2-j),?b))*force1
02340  */
02341      if ( next1 < SH->stop1 ) {
02342          t = to;
02343          n = n1;
02344          while ( --n >= 0 ) { fr = from1; CopyArg(t,fr) }
02345          for ( j = 0; j < n2; j++ ) {
02346              if ( GetBinom((UWORD *) (t),&na,n1+j,j) ) goto shuffcall;
02347              if ( Mullong((UWORD *) (AN.SHcombi+combilast+1),AN.SHcombi[combilast],
02348                          (UWORD *) (t),na,
02349                          (UWORD *) (AN.SHcombi+combilast+AN.SHcombi[combilast]+2),
02350                          (WORD *) (AN.SHcombi+combilast+AN.SHcombi[combilast]+1)) ) goto shuffcall;
02351              SH->combilast = combilast + AN.SHcombi[combilast] + 1;
02352              if ( j > 0 ) { fr = from1; CopyArg(t,fr) }
02353              fn1 = next1; tt = t;
02354              CopyArg(tt,fn1)
02355          }
02356          if ( fn1 >= SH->stop1 ) {
02357              n = n2-j;
02358              while ( --n >= 0 ) { fr = from1; CopyArg(tt,fr) }
02359              fr = next2; i = SH->stop2 - fr;
02360              NCOPY(tt,fr,i)
02361              if ( FiniShuffle(tt) ) goto shuffcall;
02362          }
02363          else {
02364              n = j; fn2 = from2; while ( --n >= 0 ) { NEXTARG(fn2) }
02365              if ( Shuffle(fn1,fn2,tt) ) goto shuffcall;
02366          }
02367          SH->combilast = combilast;
02368      }
02369  }
02370  }
02371  else {
02372  /*
02373      Argument from first list
02374  */
02375      t = to;
02376      fr = from1;
02377      CopyArg(t,fr)
02378      if ( fr >= SH->stop1 ) {
02379          fr = from2; i = SH->stop2 - fr;
02380          NCOPY(t,fr,i)
02381          if ( FiniShuffle(t) ) goto shuffcall;
02382      }
02383      else {
02384          if ( Shuffle(fr,from2,t) ) goto shuffcall;
02385      }
02386  /*
02387      Argument from second list
02388  */
02389      t = to;
02390      fr = from2;

```

```

02391     CopyArg(t,fr)
02392     if ( fr >= SH->stop2 ) {
02393         fr = from1; i = SH->stop1 - fr;
02394         NCOPY(t,fr,i)
02395         if ( FiniShuffle(t) ) goto shuffcall;
02396     }
02397     else {
02398         if ( Shuffle(from1,fr,t) ) goto shuffcall;
02399     }
02400 }
02401 return(0);
02402 shuffcall:
02403 MesCall("Shuffle");
02404 return(-1);
02405 }
02406
02407 /*
02408 #] Shuffle :
02409 #[ FinishShuffle :
02410
02411 The complications here are:
02412 1: We want to save space. We put the output term in 'out' straight
02413    on top of what we produced thusfar. We have to copy the early
02414    piece because once the term goes back to Generator, Normalize can
02415    change it in situ
02416 2: There can be other occurrence of the function between the two
02417    that we did. For shuffles that isn't likely, but we use this
02418    routine also for the stuffles and there it can happen.
02419 */
02420
02421 int FinishShuffle(WORD *fini)
02422 {
02423     GETIDENTITY
02424     WORD *t, *t1, *oldworkpointer = AT.WorkPointer, *tcoef, ntcoef, *out;
02425     int i;
02426     SHvariables *SH = &(AN.SHvar);
02427     SH->outfun[1] = fini - SH->outfun;
02428     if ( functions[SH->outfun[0]-FUNCTION].symmetric != 0 )
02429         SH->outfun[2] |= DIRTYSYMFLAG;
02430     out = fini; i = fini - SH->outterm; t = SH->outterm;
02431     NCOPY(fini,t,i)
02432     t = SH->stop1;
02433     t1 = t + t[1];
02434     while ( t1 < SH->stop2 ) { t = t1; t1 = t + t[1]; }
02435     t1 = SH->stop1;
02436     while ( t1 < t ) *fini++ = *t1++;
02437     t = SH->stop2;
02438     while ( t < SH->incoef ) *fini++ = *t++;
02439     tcoef = fini;
02440     ntcoef = SH->nincoef;
02441     i = ABS(ntcoef);
02442     NCOPY(fini,t,i);
02443     ntcoef = REDLENG(ntcoef);
02444     Mully(BHEAD (UWORD *)tcoef,&ntcoef,
02445         (UWORD *) (AN.SHcombi+SH->combilast+1),AN.SHcombi[SH->combilast]));
02446     ntcoef = INCLENG(ntcoef);
02447     fini = tcoef + ABS(ntcoef);
02448     if ( ( ( SH->option & 2 ) != 0 ) && ( ( SH->option & 256 ) != 0 ) ) ntcoef = -ntcoef;
02449     fini[-1] = ntcoef;
02450     i = *out = fini - out;
02451 /*
02452 Now check whether we have to do more
02453 */
02454 AT.WorkPointer = out + *out;
02455 if ( ( SH->option & 1 ) == 1 ) {
02456     if ( Generator(BHEAD out,SH->level) ) goto Finicall;
02457 }
02458 else {
02459     if ( DoStuffle(out,SH->level,SH->thefunction,SH->option) ) goto Finicall;
02460 }
02461 AT.WorkPointer = oldworkpointer;
02462 return(0);
02463 Finicall:
02464 AT.WorkPointer = oldworkpointer;
02465 MesCall("FinishShuffle");
02466 return(-1);
02467 }
02468
02469 /*
02470 #] FinishShuffle :
02471 #[ DoStuffle :
02472
02473 Stuffling is a variation of shuffling.
02474 In the stuffling we insist that the arguments are (short) integers. nonzero.
02475 The stuffle sum is  $x \text{ st } y = \text{sig}_-(x) * \text{sig}_-(y) * (\text{abs}(x) + \text{abs}(y))$ 
02476 The way we do this is:
02477 1: count the arguments in each function: n1, n2

```

```

02478         2: take the minimum minval = min(n1,n2).
02479         3: for ( j = 0; j <= min; j++ ) take j elements in each of the lists.
02480         4: the j+1 groups of remaining arguments have to each be shuffled
02481         5: the j selected pairs have to be stuffle added.
02482         We can use many of the shuffle things.
02483         Considering the recursive nature of the generation we actually don't
02484         need to know n1, n2, minval.
02485     */
02486
02487 int DoStuffle(WORD *term, WORD level, WORD fun, WORD option)
02488 {
02489     GETIDENTITY
02490     SHvariables SHback, *SH = &(AN.SHvar);
02491     WORD *t1, *t2, *tstop, *t1stop, *t2stop, ncoef, n = fun, *to, *from;
02492     WORD *r1, *r2;
02493     int i, error;
02494     LONG k;
02495     UWORD *newcombi;
02496 #ifdef NEWCODE
02497     WORD *rr1, *rr2, i1, i2;
02498 #endif
02499     if ( n < 0 ) {
02500         if ( ( n = DolToFunction(BHEAD -n) ) == 0 ) {
02501             MLOCK(ErrorMessageLock);
02502             MesPrint("$-variable in merge statement did not evaluate to a function.");
02503             MUNLOCK(ErrorMessageLock);
02504             return(1);
02505         }
02506     }
02507     if ( AT.WorkPointer + 3*(term) + AM.MaxTal > AT.WorkTop ) {
02508         MLOCK(ErrorMessageLock);
02509         MesWork();
02510         MUNLOCK(ErrorMessageLock);
02511         return(-1);
02512     }
02513
02514     tstop = term + *term;
02515     ncoef = tstop[-1];
02516     tstop -= ABS(ncoef);
02517     t1 = term + 1;
02518 retry1:;
02519     while ( t1 < tstop ) {
02520         if ( ( *t1 == n ) && ( t1+t1[1] < tstop ) && ( t1[1] > FUNHEAD ) ) {
02521             t2 = t1 + t1[1];
02522             if ( t2 >= tstop ) {
02523                 return(Generator(BHEAD term,level));
02524             }
02525 retry2:;
02526             while ( t2 < tstop ) {
02527                 if ( ( *t2 == n ) && ( t2[1] > FUNHEAD ) ) break;
02528                 t2 += t2[1];
02529             }
02530             if ( t2 < tstop ) break;
02531         }
02532         t1 += t1[1];
02533     }
02534     if ( t1 >= tstop ) {
02535         return(Generator(BHEAD term,level));
02536     }
02537     /*
02538     Next we have to check that the arguments are of the correct type
02539     At the same time we can count them.
02540     */
02541 #ifndef NEWCODE
02542     t1stop = t1 + t1[1];
02543     r1 = t1 + FUNHEAD;
02544     while ( r1 < t1stop ) {
02545         if ( *r1 != -SNUMBER ) break;
02546         if ( r1[1] == 0 ) break;
02547         r1 += 2;
02548     }
02549     if ( r1 < t1stop ) { t1 = t2; goto retry1; }
02550     t2stop = t2 + t2[1];
02551     r2 = t2 + FUNHEAD;
02552     while ( r2 < t2stop ) {
02553         if ( *r2 != -SNUMBER ) break;
02554         if ( r2[1] == 0 ) break;
02555         r2 += 2;
02556     }
02557     if ( r2 < t2stop ) { t2 = t2 + t2[1]; goto retry2; }
02558 #else
02559     t1stop = t1 + t1[1];
02560     r1 = t1 + FUNHEAD;
02561     while ( r1 < t1stop ) {
02562         if ( *r1 == -SNUMBER ) {
02563             if ( r1[1] == 0 ) break;
02564             r1 += 2; continue;

```



```

02565     }
02566     else if ( *r1 == -SYMBOL ) {
02567         if ( ( symbols[r1[1]].complex & VARTYPEROOTOFUNITY ) != VARTYPEROOTOFUNITY )
02568             break;
02569         r1 += 2; continue;
02570     }
02571     if ( *r1 > 0 && *r1 == r1[ARGHEAD]+ARGHEAD ) {
02572         if ( ABS(r1[r1[0]-1]) == r1[0]-ARGHEAD-1 ) {}
02573         else if ( r1[ARGHEAD+1] == SYMBOL ) {
02574             rr1 = r1 + ARGHEAD + 3;
02575             i1 = rr1[-1]-2;
02576             while ( i1 > 0 ) {
02577                 if ( ( symbols[*rr1].complex & VARTYPEROOTOFUNITY ) != VARTYPEROOTOFUNITY )
02578                     break;
02579                 i1 -= 2; rr1 += 2;
02580             }
02581             if ( i1 > 0 ) break;
02582         }
02583         else break;
02584         rr1 = r1+*r1-1;
02585         i1 = (ABS(*rr1)-1)/2;
02586         while ( i1 > 1 ) {
02587             if ( rr1[-1] ) break;
02588             i1--; rr1--;
02589         }
02590         if ( i1 > 1 || rr1[-1] != 1 ) break;
02591         r1 += *r1;
02592     }
02593     else break;
02594 }
02595 if ( r1 < t1stop ) { t1 = t2; goto retry1; }
02596 t2stop = t2 + t2[1];
02597 r2 = t2 + FUNHEAD;
02598
02599 while ( r2 < t2stop ) {
02600     if ( *r2 == -SNUMBER ) {
02601         if ( r2[1] == 0 ) break;
02602         r2 += 2; continue;
02603     }
02604     else if ( *r2 == -SYMBOL ) {
02605         if ( ( symbols[r2[1]].complex & VARTYPEROOTOFUNITY ) != VARTYPEROOTOFUNITY )
02606             break;
02607         r2 += 2; continue;
02608     }
02609     if ( *r2 > 0 && *r2 == r2[ARGHEAD]+ARGHEAD ) {
02610         if ( ABS(r2[r2[0]-1]) == r2[0]-ARGHEAD-1 ) {}
02611         else if ( r2[ARGHEAD+1] == SYMBOL ) {
02612             rr2 = r2 + ARGHEAD + 3;
02613             i2 = rr2[-1]-2;
02614             while ( i2 > 0 ) {
02615                 if ( ( symbols[*rr2].complex & VARTYPEROOTOFUNITY ) != VARTYPEROOTOFUNITY )
02616                     break;
02617                 i2 -= 2; rr2 += 2;
02618             }
02619             if ( i2 > 0 ) break;
02620         }
02621         else break;
02622         rr2 = r2+*r2-1;
02623         i2 = (ABS(*rr2)-1)/2;
02624         while ( i2 > 1 ) {
02625             if ( rr2[-1] ) break;
02626             i2--; rr2--;
02627         }
02628         if ( i2 > 1 || rr2[-1] != 1 ) break;
02629         r2 += *r2;
02630     }
02631     else break;
02632 }
02633 if ( r2 < t2stop ) { t2 = t2 + t2[1]; goto retry2; }
02634 #endif
02635 /*
02636 OK, now we got two objects that can be used.
02637 */
02638 *AN.RepPoint = 1;
02639
02640 SHback = AN.SHvar;
02641 SH->finishuf = &FinishStuffle;
02642 SH->do_uffle = &DoStuffle;
02643 SH->outterm = AT.WorkPointer;
02644 AT.WorkPointer += *term;
02645 SH->ststop1 = t1 + t1[1];
02646 SH->ststop2 = t2 + t2[1];
02647 SH->thefunction = n;
02648 SH->option = option;
02649 SH->level = level;
02650 SH->incoef = tstop;
02651 SH->nincoef = ncoef;

```

```

02652     if ( AN.SHcombi == 0 || AN.SHcombisize == 0 ) {
02653         AN.SHcombisize = 200;
02654         AN.SHcombi = (UWORD *)Malloc1(AN.SHcombisize*sizeof(UWORD), "AN.SHcombi");
02655         SH->combilast = 0;
02656         SHback.combilast = 0;
02657     }
02658     else {
02659         SH->combilast += AN.SHcombi[SH->combilast]+1;
02660         if ( SH->combilast >= AN.SHcombisize - 100 ) {
02661             newcombi = (UWORD *)Malloc1(2*AN.SHcombisize*sizeof(UWORD), "AN.SHcombi");
02662             for ( k = 0; k < AN.SHcombisize; k++ ) newcombi[k] = AN.SHcombi[k];
02663             M_free(AN.SHcombi, "AN.SHcombi");
02664             AN.SHcombi = newcombi;
02665             AN.SHcombisize *= 2;
02666         }
02667     }
02668     AN.SHcombi[SH->combilast] = 1;
02669     AN.SHcombi[SH->combilast+1] = 1;
02670
02671     i = t1-term; to = SH->outterm; from = term;
02672     NCOPY(to, from, i)
02673     SH->outfun = to;
02674     for ( i = 0; i < FUNHEAD; i++ ) { *to++ = t1[i]; }
02675
02676     error = Stuff1e(t1+FUNHEAD, t2+FUNHEAD, to);
02677
02678     AT.WorkPointer = SH->outterm;
02679     AN.SHvar = SHback;
02680     if ( error ) {
02681         MesCall("DoStuff1e");
02682         return(-1);
02683     }
02684     return(0);
02685 }
02686
02687 /*
02688 #] DoStuff1e :
02689 #[ Stuff1e :
02690
02691 The way to generate the stuff1es
02692 1: select an argument in the first list (for(j1=0;j1<last;j1++))
02693 2: select an argument in the second list (for(j2=0;j2<last;j2++))
02694 3: put values for SH->ststop1 and SH->ststop2 at these arguments.
02695 4: generate all shuff1es of the arguments in front.
02696 5: Then put the stuff1e sum of arg(j1) and arg(j2)
02697 6: Then continue calling Stuff1e
02698 7: Once one gets exhausted, we can clean up the list and call FinishShuff1e
02699 8: if ( ( SH->option & 2 ) != 0 ) the stuff1e sum is negative.
02700 */
02701
02702 int Stuff1e(WORD *from1, WORD *from2, WORD *to)
02703 {
02704     GETIDENTITY
02705     WORD *t, *tf, *next1, *next2, *st1, *st2, *savel, *save2;
02706     SHvariables *SH = &(AN.SHvar);
02707     int i, retval;
02708
02709     /*
02710     First the special cases (exhausted list(s)):
02711     */
02712     savel = SH->ststop1; save2 = SH->ststop2;
02713     if ( from1 >= SH->ststop1 && from2 == SH->ststop2 ) {
02714         SH->ststop1 = SH->ststop1;
02715         SH->ststop2 = SH->ststop2;
02716         retval = FinishShuff1e(to);
02717         SH->ststop1 = savel; SH->ststop2 = save2;
02718         return(retval);
02719     }
02720     else if ( from1 >= SH->ststop1 ) {
02721         i = SH->ststop2 - from2; t = to; tf = from2; NCOPY(t, tf, i)
02722         SH->ststop1 = SH->ststop1;
02723         SH->ststop2 = SH->ststop2;
02724         retval = FinishShuff1e(t);
02725         SH->ststop1 = savel; SH->ststop2 = save2;
02726         return(retval);
02727     }
02728     else if ( from2 >= SH->ststop2 ) {
02729         i = SH->ststop1 - from1; t = to; tf = from1; NCOPY(t, tf, i)
02730         SH->ststop1 = SH->ststop1;
02731         SH->ststop2 = SH->ststop2;
02732         retval = FinishShuff1e(t);
02733         SH->ststop1 = savel; SH->ststop2 = save2;
02734         return(retval);
02735     }
02736
02737     /*
02738     Now the case that we have no stuff1e sums.
02739     */
02740     SH->ststop1 = SH->ststop1;

```

```

02739     SH->stop2 = SH->ststop2;
02740     SH->finishuf = &FinishShuffle;
02741     if ( Shuffle(from1,from2,to) ) goto stuffcall;
02742     SH->finishuf = &FinishStuffle;
02743     /*
02744     Now we have to select a pair, one from 1 and one from 2.
02745     */
02746     #ifndef NEWCODE
02747     st1 = from1; next1 = st1+2;          /* <----- */
02748     #else
02749     st1 = next1 = from1;
02750     NEXTARG(next1)
02751     #endif
02752     while ( next1 <= SH->ststop1 ) {
02753     #ifndef NEWCODE
02754     st2 = from2; next2 = st2+2;          /* <----- */
02755     #else
02756     next2 = st2 = from2;
02757     NEXTARG(next2)
02758     #endif
02759     while ( next2 <= SH->ststop2 ) {
02760         SH->stop1 = st1;
02761         SH->stop2 = st2;
02762         if ( st1 == from1 && st2 == from2 ) {
02763             t = to;
02764             #ifndef NEWCODE
02765             *t++ = -SNUMBER; *t++ = StuffAdd(st1[1],st2[1]);
02766             #else
02767             t = StuffRootAdd(st1,st2,t);
02768             #endif
02769             SH->option ^= 256;
02770             if ( Stuffle(next1,next2,t) ) goto stuffcall;
02771             SH->option ^= 256;
02772         }
02773         else if ( st1 == from1 ) {
02774             i = st2-from2;
02775             t = to; tf = from2; NCOPY(t,tf,i)
02776             #ifndef NEWCODE
02777             *t++ = -SNUMBER; *t++ = StuffAdd(st1[1],st2[1]);
02778             #else
02779             t = StuffRootAdd(st1,st2,t);
02780             #endif
02781             SH->option ^= 256;
02782             if ( Stuffle(next1,next2,t) ) goto stuffcall;
02783             SH->option ^= 256;
02784         }
02785         else if ( st2 == from2 ) {
02786             i = st1-from1;
02787             t = to; tf = from1; NCOPY(t,tf,i)
02788             #ifndef NEWCODE
02789             *t++ = -SNUMBER; *t++ = StuffAdd(st1[1],st2[1]);
02790             #else
02791             t = StuffRootAdd(st1,st2,t);
02792             #endif
02793             SH->option ^= 256;
02794             if ( Stuffle(next1,next2,t) ) goto stuffcall;
02795             SH->option ^= 256;
02796         }
02797         else {
02798             if ( Shuffle(from1,from2,to) ) goto stuffcall;
02799         }
02800     #ifndef NEWCODE
02801     st2 = next2; next2 += 2;          /* <----- */
02802     #else
02803     st2 = next2;
02804     NEXTARG(next2)
02805     #endif
02806     }
02807     #ifndef NEWCODE
02808     st1 = next1; next1 += 2;          /* <----- */
02809     #else
02810     st1 = next1;
02811     NEXTARG(next1)
02812     #endif
02813     }
02814     SH->stop1 = save1; SH->stop2 = save2;
02815     return(0);
02816 stuffcall:;
02817     MesCall("Stuffle");
02818     return(-1);
02819 }
02820
02821 /*
02822 #] Stuffle :
02823 #[ FinishStuffle :
02824
02825 The program only comes here from the Shuffle routine.

```

```

02826     It should add the stuffle sum and then call Stuffle again.
02827 */
02828
02829 int FinishStuffle(WORD *fini)
02830 {
02831     GETIDENTITY
02832     SHvariables *SH = &(AN.SHvar);
02833     #ifdef NEWCODE
02834     WORD *next1 = SH->stop1, *next2 = SH->stop2;
02835     fini = StuffRootAdd(next1,next2,fini);
02836     #else
02837     *fini++ = -SNUMBER; *fini++ = StuffAdd(SH->stop1[1],SH->stop2[1]);
02838     #endif
02839     SH->option ^= 256;
02840     #ifdef NEWCODE
02841     NEXTARG(next1)
02842     NEXTARG(next2)
02843     if ( Stuffle(next1,next2,fini) ) goto stuffcall;
02844     #else
02845     if ( Stuffle(SH->stop1+2,SH->stop2+2,fini) ) goto stuffcall;
02846     #endif
02847     SH->option ^= 256;
02848     return(0);
02849 stuffcall:;
02850     MesCall("FinishStuffle");
02851     return(-1);
02852 }
02853
02854 /*
02855     #] FinishStuffle :
02856     #[ StuffRootAdd :
02857
02858     Makes the stuffle sum of two arguments.
02859     The arguments can be of one of three types:
02860     1: -SNUMBER,num
02861     2: -SYMBOL,symbol
02862     3: Numerical (long) argument.
02863     4: Generic argument with (only) symbols that are roots of unity and
02864        a coefficient.
02865     We have excluded the case that both t1 and t2 are of type 1:
02866     The output should be written to 'to' and the new fill position should
02867     be the return value.
02868     'to' is inside the workspace.
02869
02870     The stuffle sum is sig_(t2)*t1+sig_(t1)*t2
02871     or sig_(t1)*sig_(t2)*(abs_(t1)+abs_(t2))
02872 */
02873
02874 #ifdef NEWCODE
02875
02876 WORD *StuffRootAdd(WORD *t1, WORD *t2, WORD *to)
02877 {
02878     int type1, type2, type3, sgn, sgn1, sgn2, sgn3, pow, root, nosymbols, i;
02879     WORD *tt1, *tt2, it1, it2, *t3, *r, size1, size2, size3;
02880     WORD scratch[2];
02881     LONG x;
02882     if ( *t1 == -SNUMBER ) { type1 = 1; if ( t1[1] < 0 ) sgn1 = -1; else sgn1 = 1; }
02883     else if ( *t1 == -SYMBOL ) { type1 = 2; sgn1 = 1; }
02884     else if ( ABS(t1[*t1-1]) == *t1-ARGHEAD-1 ) {
02885         type1 = 3; if ( t1[*t1-1] < 0 ) sgn1 = -1; else sgn1 = 1; }
02886     else { type1 = 4; if ( t1[*t1-1] < 0 ) sgn1 = -1; else sgn1 = 1; }
02887     if ( *t2 == -SNUMBER ) { type2 = 1; if ( t2[1] < 0 ) sgn2 = -1; else sgn2 = 1; }
02888     else if ( *t2 == -SYMBOL ) { type2 = 2; sgn2 = 1; }
02889     else if ( ABS(t2[*t2-1]) == *t2-ARGHEAD-1 ) {
02890         type2 = 3; if ( t2[*t2-1] < 0 ) sgn2 = -1; else sgn2 = 1; }
02891     else { type2 = 4; if ( t2[*t2-1] < 0 ) sgn2 = -1; else sgn2 = 1; }
02892     if ( type1 > type2 ) {
02893         t3 = t1; t1 = t2; t2 = t3;
02894         type3 = type1; type1 = type2; type2 = type3;
02895         sgn3 = sgn1; sgn1 = sgn2; sgn2 = sgn3;
02896     }
02897     nosymbols = 1; sgn3 = 1;
02898     switch ( type1 ) {
02899     case 1:
02900         if ( type2 == 1 ) {
02901             x = sgn2 * t1[1];
02902             x += sgn1 * t2[1];
02903             if ( x > MAXPOSITIVE || x < -(MAXPOSITIVE+1) ) {
02904                 if ( x < 0 ) { sgn1 = -3; x = -x; }
02905                 else sgn1 = 3;
02906                 *to++ = ARGHEAD+4;
02907                 *to++ = 0;
02908                 FILLARG(to)
02909                 *to++ = 4; *to++ = (UWORD)x; *to++ = 1; *to++ = sgn1;
02910             }
02911             else { *to++ = -SNUMBER; *to++ = (WORD)x; }
02912         }

```

```

02913     else if ( type2 == 2 ) {
02914         *to++ = ARGHEAD+8; *to++ = 0; FILLARG(to)
02915         *to++ = 8; *to++ = SYMBOL; *to++ = 4; *to++ = t2[1]; *to++ = 1;
02916         *to++ = ABS(t1[1])+1;
02917         *to++ = 1;
02918         *to++ = 3*sgn1;
02919     }
02920     else if ( type2 == 3 ) {
02921         tt1 = (WORD *)scratch; tt1[0] = ABS(t1[1]); size1 = 1;
02922         tt2 = t2+ARGHEAD+1; size2 = (ABS(t2[*t2-1])-1)/2;
02923         t3 = to;
02924         *to++ = 0; *to++ = 0; FILLARG(to) *to++ = 0;
02925         goto DoCoeffi;
02926     }
02927     else {
02928         /*
02929         t1 is (short) numeric, t2 has the symbol(s).
02930         */
02931         tt1 = (WORD *)scratch; tt1[0] = ABS(t1[1]); size1 = 1;
02932         tt2 = t2+ARGHEAD+1; tt2 += tt2[1]; size2 = (ABS(t2[*t2-1])-1)/2;
02933         t3 = to; i = tt2 - t2; r = t2;
02934         NCOPY(to,r,i)
02935         nosymbols = 0;
02936         goto DoCoeffi;
02937     }
02938     break;
02939 case 2:
02940     if ( type2 == 2 ) {
02941         if ( t1[1] == t2[1] ) {
02942             if ( ( symbols[t1[1]].maxpower == 4 )
02943                 && ( ( symbols[t1[1]].complex & VARTYPEMINUS ) == VARTYPEMINUS ) ) {
02944                 *to++ = -SNUMBER; *to++ = -2;
02945             }
02946             else if ( symbols[t1[1]].maxpower == 2 ) {
02947                 *to++ = -SNUMBER; *to++ = 2;
02948             }
02949             else {
02950                 *to++ = ARGHEAD+8; *to++ = 0; FILLARG(to)
02951                 *to++ = 8; *to++ = SYMBOL; *to++ = 4;
02952                 *to++ = t1[1]; *to++ = 2;
02953                 *to++ = 2; *to++ = 1; *to++ = 3;
02954             }
02955         }
02956         else {
02957             *to++ = ARGHEAD+10; *to++ = 0; FILLARG(to)
02958             *to++ = 10; *to++ = SYMBOL; *to++ = 6;
02959             if ( t1[1] < t2[1] ) {
02960                 *to++ = t1[1]; *to++ = 1; *to++ = t2[1]; *to++ = 1;
02961             }
02962             else {
02963                 *to++ = t2[1]; *to++ = 1; *to++ = t1[1]; *to++ = 1;
02964             }
02965             *to++ = 2; *to++ = 1; *to++ = 3;
02966         }
02967     }
02968     else if ( type2 == 3 ) {
02969         t3 = to;
02970         *to++ = 0; *to++ = 0; FILLARG(to) *to++ = 0;
02971         *to++ = SYMBOL; *to++ = 4; *to++ = t1[1]; *to++ = 1;
02972         tt1 = scratch; tt1[1] = 1; size1 = 1;
02973         tt2 = t2+ARGHEAD+1; size2 = (ABS(t2[*t2-1])-1)/2;
02974         nosymbols = 0;
02975         goto DoCoeffi;
02976     }
02977     else {
02978         tt1 = scratch; tt1[0] = 1; size1 = 1;
02979         t3 = to;
02980         *to++ = 0; *to++ = 0; FILLARG(to) *to++ = 0;
02981         *to++ = SYMBOL; *to++ = 0;
02982         tt2 = t2 + ARGHEAD+3; it2 = tt2[-1]-2;
02983         while ( it2 > 0 ) {
02984             if ( *tt2 == t1[1] ) {
02985                 pow = tt2[1]+1;
02986                 root = symbols[*tt2].maxpower;
02987                 if ( pow >= root ) pow -= root;
02988                 if ( ( symbols[*tt2].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
02989                     if ( ( root & 1 ) == 0 && pow >= root/2 ) {
02990                         pow -= root/2; sgn3 = -sgn3;
02991                     }
02992                 }
02993                 if ( pow != 0 ) {
02994                     *to++ = *tt2; *to++ = pow;
02995                 }
02996                 tt2 += 2; it2 -= 2;
02997                 break;
02998             }
02999             else if ( t1[1] < *tt2 ) {

```

```

03000          *to++ = t1[1]; *to++ = 1; break;
03001      }
03002      else {
03003          *to++ = *tt2++; *to++ = *tt2++; it2 -= 2;
03004          if ( it2 <= 0 ) { *to++ = t1[1]; *to++ = 1; }
03005      }
03006  }
03007  while ( it2 > 0 ) { *to++ = *tt2++; *to++ = *tt2++; it2 -= 2; }
03008  if ( (to - t3) > ARGHEAD+3 ) {
03009      t3[ARGHEAD+2] = (to-t3)-ARGHEAD-1; /* size of the SYMBOL field */
03010      nosymbols = 0;
03011  }
03012  else {
03013      to = t3+ARGHEAD+1; /* no SYMBOL field */
03014  }
03015  size2 = (ABS(t2[*t2-1])-1)/2;
03016  goto DoCoeffi;
03017  }
03018  break;
03019  case 3:
03020      if ( type2 == 3 ) {
03021  /*
03022          Both are numeric
03023  */
03024          tt1 = t1+ARGHEAD+1; size1 = (ABS(t1[*t1-1])-1)/2;
03025          tt2 = t2+ARGHEAD+1; size2 = (ABS(t2[*t2-1])-1)/2;
03026          t3 = to;
03027          *to++ = 0; *to++ = 0; FILLARG(to) *to++ = 0;
03028          goto DoCoeffi;
03029      }
03030      else {
03031  /*
03032          t1 is (long) numeric, t2 has the symbol(s).
03033  */
03034          tt1 = t1+ARGHEAD+1; size1 = (ABS(t1[*t1-1])-1)/2;
03035          tt2 = t2+ARGHEAD+1; tt2 += tt2[1]; size2 = (ABS(t2[*t2-1])-1)/2;
03036          t3 = to; i = tt2 - t2; r = t2;
03037          NCOPY(to,r,i)
03038          nosymbols = 0;
03039          goto DoCoeffi;
03040      }
03041  break;
03042  case 4:
03043  /*
03044          Both have roots of unity
03045          1: Merge the lists and simplify if possible
03046  */
03047          tt1 = t1+ARGHEAD+3; it1 = tt1[-1]-2;
03048          tt2 = t2+ARGHEAD+3; it2 = tt2[-1]-2;
03049          t3 = to;
03050          *to++ = 0; *to++ = 0; FILLARG(to)
03051          *to++ = 0; *to++ = SYMBOL; *to++ = 0;
03052          while ( it1 > 0 && it2 > 0 ) {
03053              if ( *tt1 == *tt2 ) {
03054                  pow = tt1[1]+tt2[1];
03055                  root = symbols[*tt1].maxpower;
03056                  if ( pow >= root ) pow -= root;
03057                  if ( ( symbols[*tt1].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
03058                      if ( ( root & 1 ) == 0 && pow >= root/2 ) {
03059                          pow -= root/2; sgn3 = -sgn3;
03060                      }
03061                  }
03062                  if ( pow != 0 ) {
03063                      *to++ = *tt1; *to++ = pow;
03064                  }
03065                  tt1 += 2; tt2 += 2; it1 -= 2; it2 -= 2;
03066              }
03067              else if ( *tt1 < *tt2 ) {
03068                  *to++ = *tt1++; *to++ = *tt1++; it1 -= 2;
03069              }
03070              else {
03071                  *to++ = *tt2++; *to++ = *tt2++; it2 -= 2;
03072              }
03073          }
03074          while ( it1 > 0 ) { *to++ = *tt1++; *to++ = *tt1++; it1 -= 2; }
03075          while ( it2 > 0 ) { *to++ = *tt2++; *to++ = *tt2++; it2 -= 2; }
03076          if ( (to - t3) > ARGHEAD+3 ) {
03077              t3[ARGHEAD+2] = (to-t3)-ARGHEAD-1; /* size of the SYMBOL field */
03078              nosymbols = 0;
03079          }
03080          else {
03081              to = t3+ARGHEAD+1; /* no SYMBOL field */
03082          }
03083          size1 = (ABS(t1[*t1-1])-1)/2;
03084          size2 = (ABS(t2[*t2-1])-1)/2;
03085  /*
03086          Now tt1 and tt2 are pointing at their coefficients.

```

```


03087         sgn1 is the sign of 1, sgn2 is the sign of 2 and sgn3 is an extra
03088         overall sign.
03089     */
03090 DoCoeffi:
03091     if ( AddLong((UWORD *)tt1,size1,(UWORD *)tt2,size2,(UWORD *)to,&size3) ) {
03092         MLOCK(ErrorMessageLock);
03093         MesPrint("Called from StuffRootAdd");
03094         MUNLOCK(ErrorMessageLock);
03095         Terminate(-1);
03096     }
03097     sgn = sgn1*sgn2*sgn3;
03098     if ( nosymbols && size3 == 1 ) {
03099         if ( (UWORD)(to[0]) <= MAXPOSITIVE && sgn > 0 ) {
03100             sgn1 = to[0];
03101             to = t3; *to++ = -SNUMBER; *to++ = sgn1;
03102         }
03103         else if ( (UWORD)(to[0]) <= (MAXPOSITIVE+1) && sgn < 0 ) {
03104             sgn1 = to[0];
03105             to = t3; *to++ = -SNUMBER; *to++ = -sgn1;
03106         }
03107         else goto genericcoef;
03108     }
03109     else {
03110 genericcoef:
03111         to += size3;
03112         sgn = sgn*(2*size3+1);
03113         *to++ = 1;
03114         while ( size3 > 1 ) { *to++ = 0; size3--; }
03115         *to++ = sgn;
03116         t3[0] = to - t3;
03117         t3[ARGHEAD] = t3[0] - ARGHEAD;
03118     }
03119     break;
03120 }
03121 return(to);
03122 }
03123 #endif
03124 #endif
03125 /*
03126 #] StuffRootAdd :
03127 */

```

4.125 sch.c File Reference

#include "form3.h"

Include dependency graph for sch.c:

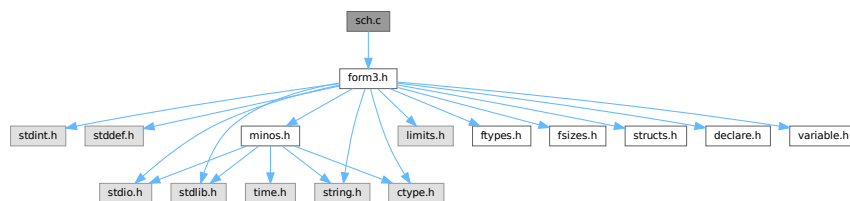

Macros

- #define [va_dcl](#) int va_alist;
- #define [va_start](#)(list) list = (UBYTE *) &va_alist
- #define [va_end](#)(list)
- #define [va_arg](#)(list, mode) (((mode *) (list += sizeof(mode)))[-1])

Typedefs

- typedef UBYTE * [va_list](#)

Functions

- `UBYTE *` [StrCopy](#) (`UBYTE *from`, `UBYTE *to`)
- `void` [AddToLine](#) (`UBYTE *s`)
- `void` [FiniLine](#) (`void`)
- `void` [IniLine](#) (`WORD extrablank`)
- `void` [LongToLine](#) (`UWORD *a`, `WORD na`)
- `void` [RatToLine](#) (`UWORD *a`, `WORD na`)
- `void` [TalToLine](#) (`UWORD x`)
- `void` [TokenToLine](#) (`UBYTE *s`)
- `UBYTE *` [CodeToLine](#) (`WORD number`, `UBYTE *Out`)
- `void` [MultiplyToLine](#) (`void`)
- `UBYTE *` [AddArrayIndex](#) (`WORD num`, `UBYTE *out`)
- `void` [PrtTerms](#) (`void`)
- `UBYTE *` [WrtPower](#) (`UBYTE *Out`, `WORD Power`)
- `void` [PrintTime](#) (`UBYTE *mess`)
- `void` [WriteLists](#) (`void`)
- `void` [WriteDictionary](#) (`DICTIONARY *dict`)
- `void` [WriteArgument](#) (`WORD *t`)
- `int` [WriteSubTerm](#) (`WORD *sterm`, `WORD first`)
- `int` [WriteInnerTerm](#) (`WORD *term`, `WORD first`)
- `int` [WriteTerm](#) (`WORD *term`, `WORD *lbrac`, `WORD first`, `WORD prtf`, `WORD br`)
- `int` [WriteExpression](#) (`WORD *terms`, `LONG ltot`)
- `int` [WriteAll](#) (`void`)
- `int` [WriteOne](#) (`UBYTE *name`, `int alreadyinline`, `int nosemi`, `WORD plus`)

4.125.1 Detailed Description

Contains the functions that deal with the writing of expressions/terms in a textual representation. (Dutch schrijven = to write)

Definition in file [sch.c](#).

4.125.2 Macro Definition Documentation

4.125.2.1 `va_dcl`

```
#define va_dcl int va_alist;
```

Definition at line 48 of file [sch.c](#).

4.125.2.2 `va_start`

```
#define va_start(  
    list ) list = (UBYTE *) &va_alist
```

Definition at line 49 of file [sch.c](#).

4.125.2.3 va_end

```
#define va_end(  
    list )
```

Definition at line 50 of file [sch.c](#).

4.125.2.4 va_arg

```
#define va_arg(  
    list,  
    mode ) (((mode *) (list += sizeof(mode))) [-1])
```

Definition at line 51 of file [sch.c](#).

4.125.3 Typedef Documentation

4.125.3.1 va_list

```
typedef UBYTE* va_list
```

Definition at line 47 of file [sch.c](#).

4.125.4 Function Documentation

4.125.4.1 StrCopy()

```
UBYTE * StrCopy (  
    UBYTE * from,  
    UBYTE * to )
```

Definition at line 67 of file [sch.c](#).

4.125.4.2 AddToLine()

```
void AddToLine (  
    UBYTE * s )
```

Definition at line 82 of file [sch.c](#).

4.125.4.3 FiniLine()

```
void FiniLine (  
    void )
```

Definition at line 182 of file [sch.c](#).

4.125.4.4 IniLine()

```
void IniLine (
    WORD extrablink )
```

Definition at line [267](#) of file [sch.c](#).

4.125.4.5 LongToLine()

```
void LongToLine (
    UWORD * a,
    WORD na )
```

Definition at line [303](#) of file [sch.c](#).

4.125.4.6 RatToLine()

```
void RatToLine (
    UWORD * a,
    WORD na )
```

Definition at line [337](#) of file [sch.c](#).

4.125.4.7 TalToLine()

```
void TalToLine (
    UWORD x )
```

Definition at line [522](#) of file [sch.c](#).

4.125.4.8 TokenToLine()

```
void TokenToLine (
    UBYTE * s )
```

Definition at line [551](#) of file [sch.c](#).

4.125.4.9 CodeToLine()

```
UBYTE * CodeToLine (
    WORD number,
    UBYTE * Out )
```

Definition at line [658](#) of file [sch.c](#).

4.125.4.10 MultiplyToLine()

```
void MultiplyToLine (  
    void )
```

Definition at line 671 of file [sch.c](#).

4.125.4.11 AddArrayIndex()

```
UBYTE * AddArrayIndex (  
    WORD num,  
    UBYTE * out )
```

Definition at line 696 of file [sch.c](#).

4.125.4.12 PrtTerms()

```
void PrtTerms (  
    void )
```

Definition at line 716 of file [sch.c](#).

4.125.4.13 WrtPower()

```
UBYTE * WrtPower (  
    UBYTE * Out,  
    WORD Power )
```

Definition at line 738 of file [sch.c](#).

4.125.4.14 PrintTime()

```
void PrintTime (  
    UBYTE * mess )
```

Definition at line 784 of file [sch.c](#).

4.125.4.15 WriteLists()

```
void WriteLists (  
    void )
```

Definition at line 810 of file [sch.c](#).

4.125.4.16 WriteDictionary()

```
void WriteDictionary (  
    DICTIONARY * dict )
```

Definition at line 1307 of file [sch.c](#).

4.125.4.17 WriteArgument()

```
void WriteArgument (
    WORD * t )
```

Definition at line [1424](#) of file [sch.c](#).

4.125.4.18 WriteSubTerm()

```
int WriteSubTerm (
    WORD * sterm,
    WORD first )
```

Definition at line [1542](#) of file [sch.c](#).

4.125.4.19 WriteInnerTerm()

```
int WriteInnerTerm (
    WORD * term,
    WORD first )
```

Definition at line [1951](#) of file [sch.c](#).

4.125.4.20 WriteTerm()

```
int WriteTerm (
    WORD * term,
    WORD * lbrac,
    WORD first,
    WORD prtf,
    WORD br )
```

Definition at line [2151](#) of file [sch.c](#).

4.125.4.21 WriteExpression()

```
int WriteExpression (
    WORD * terms,
    LONG ltot )
```

Definition at line [2473](#) of file [sch.c](#).

4.125.4.22 WriteAll()

```
int WriteAll (
    void )
```

Definition at line [2504](#) of file [sch.c](#).

4.125.4.23 WriteOne()

```
int WriteOne (
    UBYTE * name,
    int alreadyinline,
    int nosemi,
    WORD plus )
```

Definition at line 2730 of file [sch.c](#).

4.126 sch.c

[Go to the documentation of this file.](#)

```
00001
00006 /* #[] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032 /*
00033 #[] Includes : sch.c
00034 */
00035
00036 #include "form3.h"
00037
00038 #ifdef ANSI
00039 #include <stdarg.h>
00040 #else
00041 #ifdef mBSD
00042 #include <varargs.h>
00043 #else
00044 #ifdef VMS
00045 #include <varargs.h>
00046 #else
00047 typedef UBYTE *va_list;
00048 #define va_dcl int va_alist;
00049 #define va_start(list) list = (UBYTE *) &va_alist
00050 #define va_end(list)
00051 #define va_arg(list,mode) (((mode *) (list += sizeof(mode)))[-1])
00052 #endif
00053 #endif
00054 #endif
00055
00056 static int startinline = 0;
00057 static char fcontchar = '&';
00058 static int noextralinefeed = 0;
00059 static int lowestlevel = 1;
00060
00061 /*
00062 #[] Includes :
00063 #[] schryf-Utilities :
00064 #[] StrCopy : UBYTE *StrCopy(from,to)
00065 */
00066
00067 UBYTE *StrCopy(UBYTE *from, UBYTE *to)
```

```

00068 {
00069     while( ( *to++ = *from++ ) != 0 );
00070     return(to-1);
00071 }
00072
00073 /*
00074     #] StrCopy :
00075     #[ AddToLine :          void AddToLine(s)
00076
00077     Puts the characters of s in the outputline. If the line becomes
00078     filled it is written.
00079
00080 */
00081
00082 void AddToLine(UBYTE *s)
00083 {
00084     UBYTE *Out;
00085     LONG num;
00086     int i;
00087     if ( AO.OutInBuffer ) { AddToDollarBuffer(s); return; }
00088     Out = AO.OutFill;
00089     while ( *s ) {
00090         if ( Out >= AO.OutStop ) {
00091             if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90 ) {
00092                 *Out++ = fcontchar;
00093             }
00094             #ifdef WITHRETURN
00095                 *Out++ = CARRIAGERETURN;
00096             #endif
00097             *Out++ = LINEFEED;
00098             AO.PortFirst = 0;
00099             num = Out - AO.OutputLine;
00100
00101             if ( AC.LogHandle >= 0 ) {
00102                 if ( WriteFile(AC.LogHandle,AO.OutputLine+startinline
00103                     ,num-startinline) != (num-startinline) ) {
00104                     /*
00105                         We cannot write to an otherwise open log file.
00106                         The disk could be full of course.
00107                     */
00108                     #ifdef DEBUGGER
00109                         if ( BUG.logfileflag == 0 ) {
00110                             fprintf(stderr,"Panic: Cannot write to log file! Disk full?\n");
00111                             BUG.logfileflag = 1;
00112                         }
00113                         BUG.eflag = 1; BUG.printflag = 1;
00114                     #else
00115                         Terminate(-1);
00116                     #endif
00117                 }
00118             }
00119
00120             if ( ( AO.PrintType & PRINTLFILE ) == 0 ) {
00121                 #ifdef WITHRETURN
00122                     if ( num > 1 && AO.OutputLine[num-2] == CARRIAGERETURN ) {
00123                         AO.OutputLine[num-2] = LINEFEED;
00124                         num--;
00125                     }
00126                 #endif
00127                 if ( WriteFile(AM.StdOut,AO.OutputLine+startinline
00128                     ,num-startinline) != (num-startinline) ) {
00129                     #ifdef DEBUGGER
00130                         if ( BUG.stdoutflag == 0 ) {
00131                             fprintf(stderr,"Panic: Cannot write to standard output!\n");
00132                             BUG.stdoutflag = 1;
00133                         }
00134                         BUG.eflag = 1; BUG.printflag = 1;
00135                     #else
00136                         Terminate(-1);
00137                     #endif
00138                 }
00139             }
00140             /* thomasr 23/04/09: A continuation line has been started.
00141              * In Fortran90 we do not want a space after the initial
00142              * '&' character otherwise we might end up with something
00143              * like:
00144              * ... 2.&
00145              * & 0 ...
00146              */
00147             startinline = 0;
00148             for ( i = 0; i < AO.OutSkip; i++ ) AO.OutputLine[i] = ' ';
00149             Out = AO.OutputLine + AO.OutSkip;
00150             if ( ( AC.OutputMode == FORTRANMODE
00151                 || AC.OutputMode == PFORTRANMODE ) && AO.OutSkip == 7 ) {
00152                 /* thomasr 23/04/09: fix leading blank in fortran90 mode */
00153                 if(AC.IsFortran90 == ISFORTRAN90) {
00154                     Out[-1] = fcontchar;

```

```

00155         }
00156         else {
00157             Out[-2] = fcontchar;
00158             Out[-1] = ' ';
00159         }
00160     }
00161     if ( AO.IsBracket ) { *Out++ = ' ';
00162         if ( AC.OutputSpaces == NORMALFORMAT ) {
00163             *Out++ = ' '; *Out++ = ' '; }
00164     }
00165     *Out = '\0';
00166     if ( AC.OutputMode == FORTRANMODE
00167         || ( AC.OutputMode == CMODE && AO.FactorMode == 0 )
00168         || AC.OutputMode == PFORTRANMODE )
00169         AO.InFbrack++;
00170     }
00171     *Out++ = *s++;
00172 }
00173 *Out = '\0';
00174 AO.OutFill = Out;
00175 }
00176
00177 /*
00178     #] AddToLine :
00179     #[ FiniLine :      void FiniLine()
00180 */
00181
00182 void FiniLine(void)
00183 {
00184     UBYTE *Out;
00185     WORD i;
00186     LONG num;
00187     if ( AO.OutInBuffer ) return;
00188     Out = AO.OutFill;
00189     while ( Out > AO.OutputLine ) {
00190         if ( Out[-1] == ' ' ) Out--;
00191         else break;
00192     }
00193     i = (WORD)(Out-AO.OutputLine);
00194     if ( noextralinefeed == 0 ) {
00195         if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90
00196             && Out > AO.OutputLine ) {
00197             /*
00198                 *Out++ = fcontchar;
00199             */
00200         }
00201         #ifdef WITHRETURN
00202         *Out++ = CARRIAGERETURN;
00203         #endif
00204         *Out++ = LINEFEED;
00205         AO.FortFirst = 0;
00206     }
00207     num = Out - AO.OutputLine;
00208
00209     if ( AC.LogHandle >= 0 ) {
00210         if ( WriteFile(AC.LogHandle,AO.OutputLine+startinline,
00211             ,num-startinline) != (num-startinline) ) {
00212             #ifdef DEBUGGER
00213                 if ( BUG.logfileflag == 0 ) {
00214                     fprintf(stderr,"Panic: Cannot write to log file! Disk full?\n");
00215                     BUG.logfileflag = 1;
00216                 }
00217                 BUG.eflag = 1; BUG.printflag = 1;
00218             #else
00219                 Terminate(-1);
00220             #endif
00221         }
00222     }
00223
00224     if ( ( AO.PrintType & PRINTLFILE ) == 0 ) {
00225         #ifdef WITHRETURN
00226         if ( num > 1 && AO.OutputLine[num-2] == CARRIAGERETURN ) {
00227             AO.OutputLine[num-2] = LINEFEED;
00228             num--;
00229         }
00230         #endif
00231         if ( WriteFile(AM.Stdout,AO.OutputLine+startinline,
00232             ,num-startinline) != (num-startinline) ) {
00233             #ifdef DEBUGGER
00234                 if ( BUG.stdoutflag == 0 ) {
00235                     fprintf(stderr,"Panic: Cannot write to standard output!\n");
00236                     BUG.stdoutflag = 1;
00237                 }
00238                 BUG.eflag = 1; BUG.printflag = 1;
00239             #else
00240                 Terminate(-1);
00241             #endif

```

```

00242     }
00243 }
00244 startinline = 0;
00245 if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
00246     || ( AC.OutputMode == CMODE && AO.FactorMode == 0 ) ) AO.InFbrack++;
00247 Out = AO.OutputLine;
00248 AO.OutStop = Out + AC.LineLength;
00249 i = AO.OutSkip;
00250 while ( --i >= 0 ) *Out++ = ' ';
00251 if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
00252     && AO.OutSkip == 7 ) {
00253     Out[-2] = fcontchar;
00254     Out[-1] = ' ';
00255 }
00256 AO.OutFill = Out;
00257 }
00258
00259 /*
00260     #] FiniLine :
00261     #[ IniLine :          void IniLine(extrablank)
00262
00263     Initializes the output line for the type of output
00264 */
00265 void IniLine(WORD extrablank)
00266 {
00267     UBYTE *Out;
00268     Out = AO.OutputLine;
00269     AO.OutStop = Out + AC.LineLength;
00270     *Out++ = ' ';
00271     *Out++ = ' ';
00272     *Out++ = ' ';
00273     *Out++ = ' ';
00274     *Out++ = ' ';
00275     *Out++ = ' ';
00276     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {
00277         *Out++ = fcontchar;
00278         AO.OutSkip = 7;
00279     }
00280     else
00281         AO.OutSkip = 6;
00282     *Out++ = ' ';
00283     while ( extrablank > 0 ) {
00284         *Out++ = ' ';
00285         extrablank--;
00286     }
00287     AO.OutFill = Out;
00288 }
00289
00290 /*
00291     #] IniLine :
00292     #[ LongToLine :      void LongToLine(a,na)
00293
00294     Puts a Long integer in the output line. If it is only a single
00295     word long it is put in the line as a single token.
00296     The sign of a is ignored.
00297 */
00298 static UBYTE *LLscratch = 0;
00299 void LongToLine(WORD *a, WORD na)
00300 {
00301     UBYTE *OutScratch;
00302     if ( LLscratch == 0 ) {
00303         LLscratch = (UBYTE *)Malloc(4*(AM.MaxTal*sizeof(WORD)+2)*sizeof(UBYTE), "LongToLine");
00304     }
00305     OutScratch = LLscratch;
00306     if ( na < 0 ) na = -na;
00307     if ( na > 1 ) {
00308         PrtLong(a,na,OutScratch);
00309         if ( AO.NoSpacesInNumbers || AC.OutputMode == REDUCEMODE ) {
00310             AO.BlockSpaces = 1;
00311             TokenToLine(OutScratch);
00312             AO.BlockSpaces = 0;
00313         }
00314         else {
00315             TokenToLine(OutScratch);
00316         }
00317     }
00318     else if ( !na ) TokenToLine((UBYTE *)"0");
00319     else TalToLine(*a);
00320 }
00321
00322 /*
00323     #] LongToLine :
00324     #[ RatToLine :      void RatToLine(a,na)

```



```

00329
00330     Puts a rational number in the output line. The sign is ignored.
00331
00332 */
00333
00334 static UBYTE *RLscratch = 0;
00335 static UWORD *RLscratE = 0;
00336
00337 void RatToLine(UWORD *a, WORD na)
00338 {
00339     GETIDENTITY
00340     WORD adenom, anumer;
00341     ULONG maxInt;
00342
00343     if ( AC.OutputMode == CMODE ) {
00344         // In C, integer literals over 2^32-1 are automatically promoted to longer types up to
00345         // unsigned long long, however FORTRAN has always given integers over 2^32-1 a floating suffix
00346         // in C mode. Retain that behaviour here for now. In the future, maxInt could be a user-
00347         // configurable parameter.
00348         maxInt = 4294967295;
00349     }
00350     else {
00351         // In Fortran modes, literals over 2^31-1 should be printed with a float suffix
00352         maxInt = 2147483647;
00353     }
00354
00355     if ( na < 0 ) na = -na;
00356
00357     if ( AC.OutNumberType == RATIONALMODE ) {
00358
00359         // Work out what is to be printed:
00360         WORD isOne = 0, isOneOver = 0, isIntegral = 0;
00361         WORD isLongNum = 0, isLongDen = 0;
00362         UnPack(a, na, &adenom, &anumer);
00363         if ( na == 1 && a[0] == 1 && a[1] == 1 ) { isOne = 1; isIntegral = 1; }
00364         else if ( adenom == 1 && a[na] == 1 ) { isIntegral = 1; }
00365         else if ( anumer == 1 && a[0] == 1 ) { isOneOver = 1; }
00366         if ( anumer > 1 || ( anumer == 1 && a[0] > maxInt ) ) { isLongNum = 1; };
00367         if ( adenom > 1 || ( adenom == 1 && a[na] > maxInt ) ) { isLongDen = 1; };
00368
00369         // Now sort out the float suffix for the numerator:
00370         UBYTE* suffNum = (UBYTE*)" ";
00371         UBYTE* suffDen = (UBYTE*)" ";
00372         if ( isLongNum || !isIntegral || AC.Fortran90Kind || ( AO.DoubleFlag & 4 ) == 4 ) {
00373             if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90 ) {
00374                 if ( AC.Fortran90Kind ) { suffNum = AC.Fortran90Kind; }
00375                 else { suffNum = (UBYTE*)". "; }
00376             }
00377             else if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == CMODE ) {
00378                 if ( ( AO.DoubleFlag & 2 ) == 2 ) { suffNum = (UBYTE*)".Q0"; }
00379                 else if ( ( AO.DoubleFlag & 1 ) == 1 ) { suffNum = (UBYTE*)".D0"; }
00380                 else { suffNum = (UBYTE*)". "; }
00381             }
00382         }
00383         // The same again, for the denominator:
00384         if ( isLongDen || !isIntegral || AC.Fortran90Kind || ( AO.DoubleFlag & 4 ) == 4 ) {
00385             if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90 ) {
00386                 if ( AC.Fortran90Kind ) { suffDen = AC.Fortran90Kind; }
00387                 else { suffDen = (UBYTE*)". "; }
00388             }
00389             else if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == CMODE ) {
00390                 if ( ( AO.DoubleFlag & 2 ) == 2 ) { suffDen = (UBYTE*)".Q0"; }
00391                 else if ( ( AO.DoubleFlag & 1 ) == 1 ) { suffDen = (UBYTE*)".D0"; }
00392                 else { suffDen = (UBYTE*)". "; }
00393             }
00394         }
00395         // In PFORTAN mode, rationals don't get a suffix if the integers are not long
00396         // Also the suffix is at least ".D0" (and never ".").
00397         if ( AC.OutputMode == PFORTANMODE ) {
00398             if ( isLongNum ) {
00399                 if ( ( AO.DoubleFlag & 2 ) == 2 ) { suffNum = (UBYTE*)".Q0"; }
00400                 else { suffNum = (UBYTE*)".D0"; }
00401             }
00402             if ( isLongDen ) {
00403                 if ( ( AO.DoubleFlag & 2 ) == 2 ) { suffDen = (UBYTE*)".Q0"; }
00404                 else { suffDen = (UBYTE*)".D0"; }
00405             }
00406         }
00407
00408         // Finally, print the number:
00409         // In PFORTAN we use
00410         //     one      if denom = numerator = 1
00411         //     integer   if denom = 1
00412         //     (one/integer) if numerator = 1
00413         //     ((one*integer)/integer) in the general case
00414         if ( AC.OutputMode == PFORTANMODE ) {
00415             if ( isOne ) {

```

```

00416         AddToLine((UBYTE *) "one");
00417     }
00418     else if ( isOneOver ) {
00419         AddToLine((UBYTE *) "(one/");
00420         LongToLine(a+na,adenom);
00421         AddToLine(suffDen);
00422         AddToLine((UBYTE*)"");
00423     }
00424     else if ( isIntegral ) {
00425         LongToLine(a,anumer);
00426         AddToLine(suffNum);
00427     }
00428     else {
00429         // rational
00430         AddToLine((UBYTE *) "((one*");
00431         LongToLine(a,anumer);
00432         AddToLine(suffNum);
00433         AddToLine((UBYTE*)"")/");
00434         LongToLine(a+na,adenom);
00435         AddToLine(suffDen);
00436         AddToLine((UBYTE*)"")");
00437     }
00438 }
00439 // All other modes use the same printing code:
00440 else {
00441     // Numerator:
00442     LongToLine(a,anumer);
00443     AddToLine(suffNum);
00444     // Denominator, if it is not 1:
00445     if (!isIntegral) {
00446         AddToLine((UBYTE*)"")/");
00447         LongToLine(a+na,adenom);
00448         AddToLine(suffDen);
00449     }
00450 }
00451 }
00452
00453 else {
00454     /*
00455         This is the float mode
00456     */
00457     UBYTE *OutScratch;
00458     WORD exponent = 0, i, ndig, newl;
00459     UWORD *c, *den, b = 10, dig[10];
00460     UBYTE *o, *out, cc;
00461     /*
00462         First we have to adjust the numerator and denominator
00463     */
00464     if ( RLscratch == 0 ) {
00465         RLscratch = (UBYTE *) Malloc1(4*(AM.MaxTal+2)*sizeof(UBYTE), "RatToLine");
00466         RLscratE = (UWORD *) Malloc1(2*(AM.MaxTal+2)*sizeof(UWORD), "RatToLine");
00467     }
00468     out = OutScratch = RLscratch;
00469     c = RLscratE; for ( i = 0; i < 2*na; i++ ) c[i] = a[i];
00470     UnPack(c, na, &adenom, &anumer);
00471     while ( BigLong(c, anumer, c+na, adenom) >= 0 ) {
00472         Divvy(BHEAD c, &na, &b, 1);
00473         UnPack(c, na, &adenom, &anumer);
00474         exponent++;
00475     }
00476     while ( BigLong(c, anumer, c+na, adenom) < 0 ) {
00477         Mully(BHEAD c, &na, &b, 1);
00478         UnPack(c, na, &adenom, &anumer);
00479         exponent--;
00480     }
00481     /*
00482         Now division will give a number between 1 and 9
00483     */
00484     den = c + na; i = 1;
00485     DivLong(c, anumer, den, adenom, dig, &ndig, c, &newl);
00486     *out++ = (UBYTE)(dig[0]+'0'); *out++ = '.';
00487     while ( newl && i < AC.OutNumberType ) {
00488         Pack(c, &newl, den, adenom);
00489         Mully(BHEAD c, &newl, &b, 1);
00490         na = newl;
00491         UnPack(c, na, &adenom, &anumer);
00492         den = c + na;
00493         DivLong(c, anumer, den, adenom, dig, &ndig, c, &newl);
00494         if ( ndig == 0 ) *out++ = '0';
00495         else *out++ = (UBYTE)(dig[0]+'0');
00496         i++;
00497     }
00498     *out++ = 'E';
00499     if ( exponent < 0 ) { exponent = -exponent; *out++ = '-'; }
00500     else { *out++ = '+'; }
00501     o = out;
00502     do {

```

```

00503         *out++ = (UBYTE)((exponent % 10)+'0');
00504         exponent /= 10;
00505     } while ( exponent );
00506     *out = 0; out--;
00507     while ( o < out ) { cc = *o; *o = *out; *out = cc; o++; out--; }
00508     TokenToLine(OutScratch);
00509 }
00510 }
00511
00512 /*
00513     #] RatToLine :
00514     #[ TalToLine :          void TalToLine(x)
00515
00516     Writes the unsigned number x to the output as a single token.
00517     Par indicates the number of leading blanks in the line.
00518     This parameter is needed here for the WriteLists routine.
00519
00520 */
00521
00522 void TalToLine(UWORD x)
00523 {
00524     UBYTE t[BITSINWORD/3+1];
00525     UBYTE *s;
00526     WORD i = 0, j;
00527     s = t;
00528     do { *s++ = (UBYTE)((x % 10)+'0'); i++; } while ( ( x /= 10 ) != 0 );
00529     *s-- = '\0';
00530     j = ( i - 1 ) >> 1;
00531     while ( j >= 0 ) {
00532         i = t[j]; t[j] = s[-j]; s[-j] = (UBYTE)i; j--;
00533     }
00534     TokenToLine(t);
00535 }
00536
00537 /*
00538     #] TalToLine :
00539     #[ TokenToLine :      void TokenToLine(s)
00540
00541     Puts s in the output buffer. If it doesn't fit the buffer is
00542     flushed first. This routine keeps tokens as one unit.
00543     Par indicates the number of leading blanks in the line.
00544     This parameter is needed here for the WriteLists routine.
00545
00546     Remark (27-oct-2007): i and j must be longer than WORD!
00547     It can happen that a number is so long that it has more than 2^15 or 2^31
00548     digits!
00549 */
00550
00551 void TokenToLine(UBYTE *s)
00552 {
00553     UBYTE *t, *Out;
00554     LONG num, i = 0, j;
00555     if ( AO.OutInBuffer ) { AddToDollarBuffer(s); return; }
00556     t = s; Out = AO.OutFill;
00557     while ( *t++ ) i++;
00558     while ( i > 0 ) {
00559         if ( ( Out + i ) >= AO.OutStop && ( ( i < ((AC.LineLength-AO.OutSkip)>>1) )
00560             || ( (AO.OutStop-Out) < (i>>2) ) ) ) {
00561             if ( AC.OutputMode == FORTRANMODE && AC.IsFortran90 == ISFORTRAN90 ) {
00562                 *Out++ = fcontchar;
00563             }
00564 #ifdef WITHRETURN
00565             *Out++ = CARRIAGERETURN;
00566 #endif
00567             *Out++ = LINEFEED;
00568             AO.FortFirst = 0;
00569             num = Out - AO.OutputLine;
00570             if ( AC.LogHandle >= 0 ) {
00571                 if ( WriteFile(AC.LogHandle, AO.OutputLine+startinline,
00572                     num-startinline) != (num-startinline) ) {
00573 #ifdef DEBUGGER
00574                     if ( BUG.logfileflag == 0 ) {
00575                         fprintf(stderr, "Panic: Cannot write to log file! Disk full?\n");
00576                         BUG.logfileflag = 1;
00577                     }
00578                     BUG.eflag = 1; BUG.printflag = 1;
00579 #else
00580                     Terminate(-1);
00581 #endif
00582                 }
00583             }
00584             if ( ( AO.PrintType & PRINTLFILE ) == 0 ) {
00585 #ifdef WITHRETURN
00586                 if ( num > 1 && AO.OutputLine[num-2] == CARRIAGERETURN ) {
00587                     AO.OutputLine[num-2] = LINEFEED;
00588                     num--;
00589                 }

```

```

00590 #endif
00591         if ( WriteFile(AM.Stdout,AO.OutputLine+startinline,
00592             num-startinline) != (num-startinline) ) {
00593 #ifdef DEBUGGER
00594             if ( BUG.stdoutflag == 0 ) {
00595                 fprintf(stderr,"Panic: Cannot write to standard output!\n");
00596                 BUG.stdoutflag = 1;
00597             }
00598             BUG.eflag = 1; BUG.printflag = 1;
00599 #else
00600             Terminate(-1);
00601 #endif
00602         }
00603     }
00604     startinline = 0;
00605     Out = AO.OutputLine;
00606     if ( AO.BlockSpaces == 0 ) {
00607         for ( j = 0; j < AO.OutSkip; j++ ) { *Out++ = ' '; }
00608         if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) ) {
00609             if ( AO.OutSkip == 7 ) {
00610                 Out[-2] = fcontchar;
00611                 Out[-1] = ' ';
00612             }
00613         }
00614     }
00615     /*
00616     Out = AO.OutputLine + AO.OutSkip;
00617     if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
00618         && AO.OutSkip == 7 ) {
00619         Out[-2] = fcontchar;
00620         Out[-1] = ' ';
00621     }
00622     else {
00623         for ( j = 0; j < AO.OutSkip; j++ ) { AO.OutputLine[j] = ' '; }
00624     }
00625 */
00626     if ( AO.IsBracket ) { *Out++ = ' '; *Out++ = ' '; *Out++ = ' '; }
00627     *Out = '\0';
00628     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
00629         || ( AC.OutputMode == CMODE && AO.FactorMode == 0 ) ) AO.InFbrack++;
00630 }
00631 if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE ) {
00632     /* Very long numbers */
00633     if ( i > (WORD)(AO.OutStop-Out) ) j = (WORD)(AO.OutStop - Out);
00634     else j = i;
00635     i -= j;
00636     NCOPYB(Out,s,j);
00637 }
00638 else {
00639     if ( i > (WORD)(AO.OutStop-Out) ) j = (WORD)(AO.OutStop - Out - 1);
00640     else j = i;
00641     i -= j;
00642     NCOPYB(Out,s,j);
00643     if ( i > 0 ) *Out++ = '\\';
00644 }
00645 }
00646 *Out = '\0';
00647 AO.OutFill = Out;
00648 }
00649
00650 /*
00651     #] TokenToLine :
00652     #[ CodeToLine :         void CodeToLine(name,number,mode)
00653
00654     Writes a name and possibly its number to output as a single token.
00655 */
00656 /*
00657 UBYTE *CodeToLine(WORD number, UBYTE *Out)
00658 {
00659     Out = StrCopy((UBYTE *) "(", Out);
00660     Out = NumCopy(number, Out);
00661     Out = StrCopy((UBYTE *) ")", Out);
00662     return(Out);
00663 }
00664 */
00665
00666 /*
00667     #] CodeToLine :
00668     #[ MultiplyToLine :
00669 */
00670 void MultiplyToLine(void)
00671 {
00672     int i;
00673     if ( AO.CurrentDictionary > 0 && AO.CurDictSpecials > 0
00674         && AO.CurDictSpecials == DICT_DOSPECIALS ) {
00675         DICTIONARY *dict = AO.Dictionaries[AO.CurrentDictionary-1];

```

```

00677 /*
00678     Find the star:
00679 */
00680     for ( i = 0; i < dict->numelements; i++ ) {
00681         if ( dict->elements[i]->type != DICT_SPECIALCHARACTER ) continue;
00682         if ( (UBYTE)dict->elements[i]->lhs[0] == (UBYTE)('*') ) {
00683             TokenToLine((UBYTE *) (dict->elements[i]->rhs));
00684             return;
00685         }
00686     }
00687 }
00688 TokenToLine((UBYTE *) "*");
00689 }
00690
00691 /*
00692     #] MultiplyToLine :
00693     #[ AddArrayIndex :
00694 */
00695
00696 UBYTE *AddArrayIndex(WORD num, UBYTE *out)
00697 {
00698     if ( AC.OutputMode == CMODE ) {
00699         out = StrCopy((UBYTE *) "[", out);
00700         out = NumCopy(num, out);
00701         out = StrCopy((UBYTE *) "]", out);
00702     }
00703     else {
00704         out = StrCopy((UBYTE *) "(", out);
00705         out = NumCopy(num, out);
00706         out = StrCopy((UBYTE *) ")", out);
00707     }
00708     return(out);
00709 }
00710
00711 /*
00712     #] AddArrayIndex :
00713     #[ PrtTerms :          void PrtTerms()
00714 */
00715
00716 void PrtTerms(void)
00717 {
00718     UWORD a[2];
00719     WORD na;
00720     a[0] = (UWORD)AO.NumInBrack;
00721     a[1] = (UWORD)(AO.NumInBrack » BITSINWORD);
00722     if ( a[1] ) na = 2;
00723     else na = 1;
00724     TokenToLine((UBYTE *) " ");
00725     LongToLine(a, na);
00726     if ( a[0] == 1 && na == 1 ) {
00727         TokenToLine((UBYTE *) " term");
00728     }
00729     else TokenToLine((UBYTE *) " terms");
00730     AO.NumInBrack = 0;
00731 }
00732
00733 /*
00734     #] PrtTerms :
00735     #[ WrtPower :
00736 */
00737
00738 UBYTE *WrtPower(UBYTE *Out, WORD Power)
00739 {
00740     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
00741         || AC.OutputMode == REDUCEMODE ) {
00742         *Out++ = '*'; *Out++ = '*';
00743     }
00744     else if ( AC.OutputMode == CMODE ) *Out++ = ',';
00745     else {
00746         UBYTE *Out1 = IsExponentSign();
00747         if ( Out1 == 0 ) *Out++ = '^';
00748         else {
00749             while ( *Out1 ) *Out++ = *Out1++;
00750             *Out = 0;
00751         }
00752     }
00753     if ( Power >= 0 ) {
00754         if ( Power < 2*MAXPOWER )
00755             Out = NumCopy(Power, Out);
00756         else
00757             Out = StrCopy(FindSymbol((WORD)((LONG)Power-2*MAXPOWER)), Out);
00758     /*
00759         Out = StrCopy(VARNAME(symbols, (LONG)Power-2*MAXPOWER), Out); */
00759     if ( AC.OutputMode == CMODE ) *Out++ = ')';
00760     *Out = 0;
00761 }
00762 else {
00763     if ( ( AC.OutputMode >= FORTRANMODE || AC.OutputMode >= PFORTRANMODE

```

```

00764         || AC.OutputMode >= REDUCEMODE ) && AC.OutputMode != CMODE )
00765         *Out++ = '(';
00766         *Out++ = '-';
00767         if ( Power > -2*MAXPOWER )
00768             Out = NumCopy(-Power,Out);
00769         else
00770             Out = StrCopy(FindSymbol( (WORD) ( (LONG)Power-2*MAXPOWER) ),Out);
00771         /* Out = StrCopy(VARNAME(symbols, (LONG) (-Power)-2*MAXPOWER),Out); */
00772         if ( AC.OutputMode >= FORTRANMODE || AC.OutputMode >= PFORTRANMODE
00773             || AC.OutputMode >= REDUCEMODE ) *Out++ = ')';
00774         *Out = 0;
00775     }
00776     return(Out);
00777 }
00778
00779 /*
00780     #] WrtPower :
00781     #[ PrintTime :
00782 */
00783
00784 void PrintTime(UBYTE *mess)
00785 {
00786     LONG millitime = TimeCPU(1);
00787     WORD timepart = (WORD)(millitime%1000);
00788     millitime /= 1000;
00789     timepart /= 10;
00790     MesPrint("At %s: Time = %7l.%2i sec",mess,millitime,timepart);
00791 }
00792
00793 /*
00794     #] PrintTime :
00795     #] schryf-Utilities :
00796     #[ schryf-Writes :
00797     #[ WriteLists :          void WriteLists()
00798
00799     Writes the namelists. If mode > 0 also the internal codes are given.
00800
00801 */
00802
00803 static UBYTE *symname[] = {
00804     (UBYTE *)"(cyclic)", (UBYTE *)"(reversecyclic)"
00805     , (UBYTE *)"(symmetric)", (UBYTE *)"(antisymmetric)" };
00806 static UBYTE *rsymname[] = {
00807     (UBYTE *)"(-cyclic)", (UBYTE *)"(-reversecyclic)"
00808     , (UBYTE *)"(-symmetric)", (UBYTE *)"(-antisymmetric)" };
00809
00810 void WriteLists(void)
00811 {
00812     GETIDENTITY
00813     WORD i, j, k, *skip;
00814     int first, startvalue;
00815     UBYTE *OutScr, *Out;
00816     EXPRESSIONS e;
00817     CBUF *C = cbuf+AC.cbunum;
00818     int olddict = AO.CurrentDictionary;
00819     skip = &AO.OutSkip;
00820     *skip = 0;
00821     AO.OutputLine = AO.OutFill = (UBYTE *)AT.WorkPointer;
00822     AO.CurrentDictionary = 0;
00823     FiniLine();
00824     OutScr = (UBYTE *)AT.WorkPointer + ( TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer) ) /2;
00825     if ( AC.CodesFlag || AC.NamesFlag > 1 ) startvalue = 0;
00826     else startvalue = FIRSTUSERSYMBOL;
00827     /*
00828         #[ Symbols :
00829     */
00830     if ( ( j = NumSymbols ) > startvalue ) {
00831         TokenToLine((UBYTE *)" Symbols");
00832         *skip = 3;
00833         FiniLine();
00834         for ( i = startvalue; i < j; i++ ) {
00835             if ( i >= BUILTINSYMBOLS && i < FIRSTUSERSYMBOL ) continue;
00836             Out = StrCopy(VARNAME(symbols,i),OutScr);
00837             if ( symbols[i].minpower > -MAXPOWER || symbols[i].maxpower < MAXPOWER ) {
00838                 Out = StrCopy((UBYTE *)"(",Out);
00839                 if ( symbols[i].minpower > -MAXPOWER )
00840                     Out = NumCopy(symbols[i].minpower,Out);
00841                 Out = StrCopy((UBYTE *)":",Out);
00842                 if ( symbols[i].maxpower < MAXPOWER )
00843                     Out = NumCopy(symbols[i].maxpower,Out);
00844                 Out = StrCopy((UBYTE *)")",Out);
00845             }
00846             if ( ( symbols[i].complex & VARTYPEIMAGINARY ) == VARTYPEIMAGINARY ) {
00847                 Out = StrCopy((UBYTE *)"#i",Out);
00848             }
00849             else if ( ( symbols[i].complex & VARTYPECOMPLEX ) == VARTYPECOMPLEX ) {
00850                 Out = StrCopy((UBYTE *)"#c",Out);
00851             }
00852         }
00853     }

```

```

00851     }
00852     else if ( ( symbols[i].complex & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY ) {
00853         Out = StrCopy((UBYTE *)"#",Out);
00854         if ( ( symbols[i].complex & VARTYPEMINUS ) == VARTYPEMINUS ) {
00855             Out = StrCopy((UBYTE *)"-",Out);
00856         }
00857         else {
00858             Out = StrCopy((UBYTE *)"+",Out);
00859         }
00860         Out = NumCopy(symbols[i].maxpower,Out);
00861     }
00862     if ( AC.CodesFlag ) Out = CodeToLine(i,Out);
00863     if ( ( symbols[i].complex & VARTYPECOMPLEX ) == VARTYPECOMPLEX ) i++;
00864     StrCopy((UBYTE *)" ",Out);
00865     TokenToLine(OutScr);
00866 }
00867 *skip = 0;
00868 FiniLine();
00869 }
00870 /*
00871 #] Symbols :
00872 #[ Indices :
00873 */
00874 if ( AC.CodesFlag || AC.NamesFlag > 1 ) startvalue = 0;
00875 else startvalue = BUILTININDICES;
00876 if ( ( j = NumIndices ) > startvalue ) {
00877     TokenToLine((UBYTE *)" Indices");
00878     *skip = 3;
00879     FiniLine();
00880     for ( i = startvalue; i < j; i++ ) {
00881         Out = StrCopy(FindIndex(i+AM.OffsetIndex),OutScr);
00882         Out = StrCopy(VARNAME(indices,i),OutScr);
00883         if ( indices[i].dimension >= 0 ) {
00884             if ( indices[i].dimension != AC.lDefDim ) {
00885                 Out = StrCopy((UBYTE *)"=",Out);
00886                 Out = NumCopy(indices[i].dimension,Out);
00887             }
00888         }
00889         else if ( indices[i].dimension < 0 ) {
00890             Out = StrCopy((UBYTE *)"=",Out);
00891             Out = StrCopy(VARNAME(symbols,-indices[i].dimension),Out);
00892             if ( indices[i].nmin4 < -NMIN4SHIFT ) {
00893                 Out = StrCopy((UBYTE *)":",Out);
00894                 Out = StrCopy(VARNAME(symbols,-indices[i].nmin4-NMIN4SHIFT),Out);
00895             }
00896         }
00897         if ( AC.CodesFlag ) Out = CodeToLine(i+AM.OffsetIndex,Out);
00898         StrCopy((UBYTE *)" ",Out);
00899         TokenToLine(OutScr);
00900     }
00901     *skip = 0;
00902     FiniLine();
00903 }
00904 /*
00905 #] Indices :
00906 #[ Vectors :
00907 */
00908 if ( AC.CodesFlag || AC.NamesFlag > 1 ) startvalue = 0;
00909 else startvalue = BUILTINVECTORS;
00910 if ( ( j = NumVectors ) > startvalue ) {
00911     TokenToLine((UBYTE *)" Vectors");
00912     *skip = 3;
00913     FiniLine();
00914     for ( i = startvalue; i < j; i++ ) {
00915         Out = StrCopy(VARNAME(vectors,i),OutScr);
00916         if ( AC.CodesFlag ) Out = CodeToLine(i+AM.OffsetVector,Out);
00917         StrCopy((UBYTE *)" ",Out);
00918         TokenToLine(OutScr);
00919     }
00920     *skip = 0;
00921     FiniLine();
00922 }
00923 /*
00924 #] Vectors :
00925 #[ Functions :
00926 */
00927 if ( AC.CodesFlag || AC.NamesFlag > 1 ) startvalue = 0;
00928 else startvalue = AM.NumFixedFunctions;
00929 for ( k = 0; k < 2; k++ ) {
00930     first = 1;
00931     j = NumFunctions;
00932     for ( i = startvalue; i < j; i++ ) {
00933         if ( i > MAXBUILTINFUNCTION-FUNCTION
00934             && i < FIRSTUSERFUNCTION-FUNCTION ) continue;
00935         if ( ( k == 0 && functions[i].commute )
00936             || ( k != 0 && !functions[i].commute ) ) {
00937             if ( first ) {

```

```

00938             TokenToLine((UBYTE *) (FG.FunNam[k]));
00939             *skip = 3;
00940             FiniLine();
00941             first = 0;
00942         }
00943         Out = StrCopy(VARNAME(functions,i),OutScr);
00944         if ( ( functions[i].complex & VARTYPEIMAGINARY ) == VARTYPEIMAGINARY ) {
00945             Out = StrCopy((UBYTE *)"#i",Out);
00946         }
00947         else if ( ( functions[i].complex & VARTYPECOMPLEX ) == VARTYPECOMPLEX ) {
00948             Out = StrCopy((UBYTE *)"#c",Out);
00949         }
00950         if ( functions[i].spec == VERTEXFUNCTION ) {
00951             Out = StrCopy((UBYTE *)"(Particle)",Out);
00952         }
00953         else if ( functions[i].spec >= TENSORFUNCTION ) {
00954             Out = StrCopy((UBYTE *)"(Tensor)",Out);
00955         }
00956         if ( functions[i].symmetric > 0 ) {
00957             if ( ( functions[i].symmetric & REVERSEORDER ) != 0 ) {
00958                 Out = StrCopy((UBYTE *) (rsymname[(functions[i].symmetric &
~REVERSEORDER)-1]),Out);
00959             }
00960             else {
00961                 Out = StrCopy((UBYTE *) (symname[functions[i].symmetric-1]),Out);
00962             }
00963         }
00964         if ( AC.CodesFlag ) Out = CodeToLine(i+FUNCTION,Out);
00965         if ( ( functions[i].complex & VARTYPECOMPLEX ) == VARTYPECOMPLEX ) i++;
00966         StrCopy((UBYTE *)" ",Out);
00967         TokenToLine(OutScr);
00968     }
00969 }
00970 *skip = 0;
00971 if ( first == 0 ) FiniLine();
00972 }
00973 /*
00974     #] Functions :
00975     #[ Sets :
00976 */
00977 if ( AC.CodesFlag || AC.NamesFlag > 1 ) startvalue = 0;
00978 else startvalue = AM.NumFixedSets;
00979 if ( ( j = AC.SetList.num ) > startvalue ) {
00980     WORD element, LastElement, type, number;
00981     TokenToLine((UBYTE *)" Sets");
00982     for ( i = startvalue; i < j; i++ ) {
00983         *skip = 3;
00984         FiniLine();
00985         if ( Sets[i].name < 0 ) {
00986             Out = StrCopy((UBYTE *)"{}",OutScr);
00987         }
00988         else {
00989             Out = StrCopy(VARNAME(Sets,i),OutScr);
00990         }
00991         if ( AC.CodesFlag ) Out = CodeToLine(i,Out);
00992         StrCopy((UBYTE *)":",Out);
00993         TokenToLine(OutScr);
00994         if ( i < AM.NumFixedSets ) {
00995             TokenToLine((UBYTE *)" ");
00996             TokenToLine((UBYTE *)fixedsets[i].description);
00997         }
00998         else if ( Sets[i].type == CRANGE ) {
00999             int iflag = 0;
01000             if ( Sets[i].first == 3*MAXPOWER ) {
01001             }
01002             else if ( Sets[i].first >= MAXPOWER ) {
01003                 TokenToLine((UBYTE *)"<=");
01004                 NumCopy(Sets[i].first-2*MAXPOWER,OutScr);
01005                 TokenToLine(OutScr);
01006                 iflag = 1;
01007             }
01008             else {
01009                 TokenToLine((UBYTE *)"<");
01010                 NumCopy(Sets[i].first,OutScr);
01011                 TokenToLine(OutScr);
01012                 iflag = 1;
01013             }
01014             if ( Sets[i].last == -3*MAXPOWER ) {
01015             }
01016             else if ( Sets[i].last <= -MAXPOWER ) {
01017                 if ( iflag ) TokenToLine((UBYTE *)",");
01018                 TokenToLine((UBYTE *)">=");
01019                 NumCopy(Sets[i].last+2*MAXPOWER,OutScr);
01020                 TokenToLine(OutScr);
01021             }
01022             else {
01023                 if ( iflag ) TokenToLine((UBYTE *)",");

```



```

01024         TokenToLine((UBYTE *)">");
01025         NumCopy(Sets[i].last, OutScr);
01026         TokenToLine(OutScr);
01027     }
01028 }
01029 else {
01030     element = Sets[i].first;
01031     LastElement = Sets[i].last;
01032     type = Sets[i].type;
01033     while ( element < LastElement ) {
01034         TokenToLine((UBYTE *)" ");
01035         number = SetElements[element++];
01036         switch ( type ) {
01037             case CSYMBOL:
01038                 if ( number < 0 ) {
01039                     StrCopy(VARNAME(symbols, -number), OutScr);
01040                     StrCopy((UBYTE *) "?", Out);
01041                     TokenToLine(OutScr);
01042                 }
01043                 else if ( number < MAXPOWER )
01044                     TokenToLine(VARNAME(symbols, number));
01045                 else {
01046                     NumCopy(number-2*MAXPOWER, OutScr);
01047                     TokenToLine(OutScr);
01048                 }
01049                 break;
01050             case CINDEX:
01051                 if ( number >= AM.IndDum ) {
01052                     Out = StrCopy((UBYTE *) "N", OutScr);
01053                     Out = NumCopy(number-(AM.IndDum), Out);
01054                     StrCopy((UBYTE *) "_?", Out);
01055                     TokenToLine(OutScr);
01056                 }
01057                 else if ( number >= AM.OffsetIndex + (WORD)WILDMASK ) {
01058                     Out = StrCopy(VARNAME(indices, number
01059                                     -AM.OffsetIndex-WILDMASK), OutScr);
01060                     StrCopy((UBYTE *) "?", Out);
01061                     TokenToLine(OutScr);
01062                 }
01063                 else if ( number >= AM.OffsetIndex ) {
01064                     TokenToLine(VARNAME(indices, number-AM.OffsetIndex));
01065                 }
01066                 else {
01067                     NumCopy(number, OutScr);
01068                     TokenToLine(OutScr);
01069                 }
01070                 break;
01071             case CVECTOR:
01072                 Out = OutScr;
01073                 if ( number < AM.OffsetVector ) {
01074                     number += WILDMASK;
01075                     Out = StrCopy((UBYTE *) "-", Out);
01076                 }
01077                 if ( number >= AM.OffsetVector + WILDOFFSET ) {
01078                     Out = StrCopy(VARNAME(vectors, number
01079                                     -AM.OffsetVector-WILDOFFSET), Out);
01080                     StrCopy((UBYTE *) "?", Out);
01081                 }
01082                 else {
01083                     Out = StrCopy(VARNAME(vectors, number-AM.OffsetVector), Out);
01084                 }
01085                 TokenToLine(OutScr);
01086                 break;
01087             case CFUNCTION:
01088                 if ( number >= FUNCTION + (WORD)WILDMASK ) {
01089                     Out = StrCopy(VARNAME(functions, number
01090                                     -FUNCTION-WILDMASK), OutScr);
01091                     StrCopy((UBYTE *) "?", Out);
01092                     TokenToLine(OutScr);
01093                 }
01094                 TokenToLine(VARNAME(functions, number-FUNCTION));
01095                 break;
01096             default:
01097                 NumCopy(number, OutScr);
01098                 TokenToLine(OutScr);
01099                 break;
01100         }
01101     }
01102 }
01103 }
01104 *skip = 0;
01105 FiniLine();
01106 }
01107 /*
01108 #] Sets :
01109 #[ Expressions :
01110 */

```

```

01111     if ( AS.ExecMode ) {
01112         e = Expressions;
01113         j = NumExpressions;
01114         first = 1;
01115         for ( i = 0; i < j; i++, e++ ) {
01116             if ( e->status >= 0 ) {
01117                 if ( first ) {
01118                     TokenToLine((UBYTE *) " Expressions");
01119                     *skip = 3;
01120                     FiniLine();
01121                     first = 0;
01122                 }
01123                 Out = StrCopy(AC.exprnames->namebuffer+e->name, OutScr);
01124                 Out = StrCopy((UBYTE *) (FG.ExprStat[e->status]), Out);
01125                 if ( AC.CodesFlag ) Out = CodeToLine(i, Out);
01126                 StrCopy((UBYTE *) " ", Out);
01127                 TokenToLine(OutScr);
01128             }
01129         }
01130         if ( !first ) {
01131             *skip = 0;
01132             FiniLine();
01133         }
01134     }
01135     e = Expressions;
01136     j = NumExpressions;
01137     first = 1;
01138     for ( i = 0; i < j; i++ ) {
01139         if ( e->printflag && ( e->status == LOCALEXPRESSION ||
01140             e->status == GLOBALEXPRESSION || e->status == UNHIDELEXPRESSION
01141             || e->status == UNHIDEGEXPRESSION ) ) {
01142             if ( first ) {
01143                 TokenToLine((UBYTE *) " Expressions to be printed");
01144                 *skip = 3;
01145                 FiniLine();
01146                 first = 0;
01147             }
01148             Out = StrCopy(AC.exprnames->namebuffer+e->name, OutScr);
01149             StrCopy((UBYTE *) " ", Out);
01150             TokenToLine(OutScr);
01151         }
01152         e++;
01153     }
01154     if ( !first ) {
01155         *skip = 0;
01156         FiniLine();
01157     }
01158     /*
01159         #] Expressions :
01160         #[ Dollars :
01161     */
01162
01163     if ( AC.CodesFlag || AC.NamesFlag > 1 ) startvalue = 0;
01164     else startvalue = BUILTINDOLLARS;
01165     if ( ( j = NumDollars ) > startvalue ) {
01166         TokenToLine((UBYTE *) " Dollar variables");
01167         *skip = 3;
01168         FiniLine();
01169         for ( i = startvalue; i < j; i++ ) {
01170             Out = StrCopy((UBYTE *) "$", OutScr);
01171             Out = StrCopy(DOLLARNAME(Dollars, i), Out);
01172             if ( AC.CodesFlag ) Out = CodeToLine(i, Out);
01173             StrCopy((UBYTE *) " ", Out);
01174             TokenToLine(OutScr);
01175         }
01176         *skip = 0;
01177         FiniLine();
01178     }
01179
01180     if ( ( j = NumPotModdollars ) > 0 ) {
01181         TokenToLine((UBYTE *) " Dollar variables to be modified");
01182         *skip = 3;
01183         FiniLine();
01184         for ( i = 0; i < j; i++ ) {
01185             Out = StrCopy((UBYTE *) "$", OutScr);
01186             Out = StrCopy(DOLLARNAME(Dollars, PotModdollars[i]), Out);
01187             for ( k = 0; k < NumModOptdollars; k++ )
01188                 if ( ModOptdollars[k].number == PotModdollars[i] ) break;
01189             if ( k < NumModOptdollars ) {
01190                 switch ( ModOptdollars[k].type ) {
01191                     case MODSUM:
01192                         Out = StrCopy((UBYTE *) "(sum)", Out);
01193                         break;
01194                     case MODMAX:
01195                         Out = StrCopy((UBYTE *) "(maximum)", Out);
01196                         break;
01197                     case MODMIN:

```

```

01198             Out = StrCopy((UBYTE *)"(minimum)", Out);
01199             break;
01200         case MODLOCAL:
01201             Out = StrCopy((UBYTE *)"(local)", Out);
01202             break;
01203         default:
01204             Out = StrCopy((UBYTE *)"(?)", Out);
01205             break;
01206     }
01207 }
01208 StrCopy((UBYTE *)" ", Out);
01209 TokenToLine(OutScr);
01210 }
01211 *skip = 0;
01212 FiniLine();
01213 }
01214 /*
01215 #] Dollars :
01216 */
01217
01218 if ( AC.ncmod != 0 ) {
01219     TokenToLine((UBYTE *)"All arithmetic is modulus ");
01220     LongToLine((UWORD *)AC.cmod,ABS(AC.ncmod));
01221     if ( AC.ncmod > 0 ) TokenToLine((UBYTE *)" with powerreduction");
01222     else TokenToLine((UBYTE *)" without powerreduction");
01223     if ( ( AC.modmode & POSNEG ) != 0 ) TokenToLine((UBYTE *)" centered around 0");
01224     else TokenToLine((UBYTE *)" positive numbers only");
01225     FiniLine();
01226 }
01227 if ( AC.lDefDim != 4 ) {
01228     TokenToLine((UBYTE *)"The default dimension is ");
01229     if ( AC.lDefDim >= 0 ) {
01230         NumCopy(AC.lDefDim,OutScr);
01231         TokenToLine(OutScr);
01232     }
01233     else {
01234         TokenToLine(VARNAME(symbols,-AC.lDefDim));
01235         if ( AC.lDefDim4 != -NMIN4SHIFT ) {
01236             TokenToLine((UBYTE *)"");
01237             if ( AC.lDefDim4 >= -NMIN4SHIFT ) {
01238                 NumCopy(AC.lDefDim4,OutScr);
01239                 TokenToLine(OutScr);
01240             }
01241             else {
01242                 TokenToLine(VARNAME(symbols,-AC.lDefDim4-NMIN4SHIFT));
01243             }
01244         }
01245     }
01246     FiniLine();
01247 }
01248 if ( AC.lUnitTrace != 4 ) {
01249     TokenToLine((UBYTE *)"The trace of the unit matrix is ");
01250     if ( AC.lUnitTrace >= 0 ) {
01251         NumCopy(AC.lUnitTrace,OutScr);
01252         TokenToLine(OutScr);
01253     }
01254     else {
01255         TokenToLine(VARNAME(symbols,-AC.lUnitTrace));
01256     }
01257     FiniLine();
01258 }
01259 if ( AO.NumDictionaries > 0 ) {
01260     for ( i = 0; i < AO.NumDictionaries; i++ ) {
01261         WriteDictionary(AO.Dictionaries[i]);
01262     }
01263     if ( olddict > 0 )
01264         MesPrint("\nCurrently dictionary %s is active\n",
01265             AO.Dictionaries[olddict-1]->name);
01266     else
01267         MesPrint("\nCurrently there is no active dictionary\n");
01268 }
01269 if ( AC.CodesFlag ) {
01270     if ( C->numlhs > 0 ) {
01271         TokenToLine((UBYTE *)" Left Hand Sides:");
01272         AO.OutSkip = 3;
01273         for ( i = 1; i <= C->numlhs; i++ ) {
01274             FiniLine();
01275             skip = C->lhs[i];
01276             j = skip[1];
01277             while ( --j >= 0 ) { TalToLine((UWORD)(*skip++)); TokenToLine((UBYTE *)" "); }
01278         }
01279         AO.OutSkip = 0;
01280         FiniLine();
01281     }
01282     if ( C->numrhs > 0 ) {
01283         TokenToLine((UBYTE *)" Right Hand Sides:");
01284         AO.OutSkip = 3;

```

```

01285         for ( i = 1; i <= C->numrhs; i++ ) {
01286             FiniLine();
01287             skip = C->rhs[i];
01288             while ( ( j = skip[0] ) != 0 ) {
01289                 while ( --j >= 0 ) { TalToLine((UWORD) (*skip++)); TokenToLine((UBYTE *) " "); }
01290             }
01291             FiniLine();
01292         }
01293         AO.OutSkip = 0;
01294         FiniLine();
01295     }
01296 }
01297 AO.CurrentDictionary = olddict;
01298 }
01299
01300 /*
01301     #] WriteLists :
01302     #[ WriteDictionary :
01303
01304     This routine is part of WriteLists and should be called from there.
01305 */
01306
01307 void WriteDictionary(DICTIONARY *dict)
01308 {
01309     GETIDENTITY
01310     int i, first;
01311     WORD *skip, na, *a, spec, *t, *tstop, j;
01312     UBYTE str[2], *OutScr, *Out;
01313     WORD oldoutputmode = AC.OutputMode, oldoutputsaces = AC.OutputSpaces;
01314     WORD oldoutskip = AO.OutSkip;
01315     AC.OutputMode = NORMALFORMAT;
01316     AC.OutputSpaces = NOSPACEFORMAT;
01317     MesPrint("===Contents of dictionary %s===", dict->name);
01318     skip = &AO.OutSkip;
01319     *skip = 3;
01320     AO.OutputLine = AO.OutFill = (UBYTE *) AT.WorkPointer;
01321     for ( j = 0; j < *skip; j++ ) *(AO.OutFill)++ = ' ';
01322
01323     OutScr = (UBYTE *) AT.WorkPointer + ( TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer) ) /2;
01324     for ( i = 0; i < dict->numelements; i++ ) {
01325         switch ( dict->elements[i]->type ) {
01326             case DICT_INTEGERNUMBER:
01327                 LongToLine((UWORD *) (dict->elements[i]->lhs), dict->elements[i]->size);
01328                 Out = OutScr; *Out = 0;
01329                 break;
01330             case DICT_RATIONALNUMBER:
01331                 a = dict->elements[i]->lhs;
01332                 na = a[a[0]-1]; na = (ABS(na)-1)/2;
01333                 RatToLine((UWORD *) (a+1), na);
01334                 Out = OutScr; *Out = 0;
01335                 break;
01336             case DICT_SYMBOL:
01337                 na = dict->elements[i]->lhs[0];
01338                 Out = StrCopy(VARNAME(symbols, na), OutScr);
01339                 break;
01340             case DICT_VECTOR:
01341                 na = dict->elements[i]->lhs[0]-AM.OffsetVector;
01342                 Out = StrCopy(VARNAME(vectors, na), OutScr);
01343                 break;
01344             case DICT_INDEX:
01345                 na = dict->elements[i]->lhs[0]-AM.OffsetIndex;
01346                 Out = StrCopy(VARNAME(indices, na), OutScr);
01347                 break;
01348             case DICT_FUNCTION:
01349                 na = dict->elements[i]->lhs[0]-FUNCTION;
01350                 Out = StrCopy(VARNAME(functions, na), OutScr);
01351                 break;
01352             case DICT_FUNCTION_WITH_ARGUMENTS:
01353                 t = dict->elements[i]->lhs;
01354                 na = *t-FUNCTION;
01355                 Out = StrCopy(VARNAME(functions, na), OutScr);
01356                 spec = functions[*t - FUNCTION].spec;
01357                 tstop = t + t[1];
01358                 first = 1;
01359                 if ( t[1] <= FUNHEAD ) {}
01360                 else if ( spec >= TENSORFUNCTION ) {
01361                     t += FUNHEAD; *Out++ = (UBYTE) '(';
01362                     while ( t < tstop ) {
01363                         if ( first == 0 ) *Out++ = (UBYTE) (',' );
01364                         else first = 0;
01365                         j = *t++;
01366                         if ( j >= 0 ) {
01367                             if ( j < AM.OffsetIndex ) { Out = NumCopy(j, Out); }
01368                             else if ( j < AM.IndDum ) {
01369                                 Out = StrCopy(VARNAME(indices, j-AM.OffsetIndex), Out);
01370                             }
01371                             else {

```

```

01372                                     MesPrint("Currently wildcards are not allowed in dictionary
elements");
01373                                     Terminate(-1);
01374                                     }
01375                                     }
01376                                     else {
01377                                         Out = StrCopy(VARNAME(vectors, j-AM.OffsetVector), Out);
01378                                     }
01379                                     }
01380                                     *Out++ = (UBYTE)'\''; *Out = 0;
01381                                     }
01382                                     else {
01383                                         t += FUNHEAD; *Out++ = (UBYTE)'\''; *Out = 0;
01384                                         TokenToLine(OutScr);
01385                                         while ( t < tstop ) {
01386                                             if ( !first ) TokenToLine((UBYTE *)"", "");
01387                                             WriteArgument(t);
01388                                             NEXTARG(t);
01389                                             first = 0;
01390                                         }
01391                                         Out = OutScr;
01392                                         *Out++ = (UBYTE)'\''; *Out = 0;
01393                                     }
01394                                     break;
01395                                     case DICT_SPECIALCHARACTER:
01396                                         str[0] = (UBYTE)(dict->elements[i]->lhs[0]);
01397                                         str[1] = 0;
01398                                         Out = StrCopy(str, OutScr);
01399                                         break;
01400                                     default:
01401                                         Out = OutScr; *Out = 0;
01402                                         break;
01403                                     }
01404                                     Out = StrCopy((UBYTE *)": \"", Out);
01405                                     Out = StrCopy((UBYTE *) (dict->elements[i]->rhs), Out);
01406                                     Out = StrCopy((UBYTE *) "\"", Out);
01407                                     TokenToLine(OutScr);
01408                                     FiniLine();
01409                                     }
01410                                     MesPrint("====End of dictionary %s====", dict->name);
01411                                     AC.OutputMode = oldoutputmode;
01412                                     AC.OutputSpaces = oldoutputspaces;
01413                                     AO.OutSkip = oldoutskip;
01414     }
01415
01416     /*
01417         #] WriteDictionary :
01418         #[ WriteArgument :      void WriteArgument(WORD *t)
01419
01420         Write a single argument field. The general field goes to
01421         WriteExpression and the fast field is dealt with here.
01422     */
01423
01424     void WriteArgument(WORD *t)
01425     {
01426         UBYTE buffer[180];
01427         UBYTE *Out;
01428         WORD i;
01429         int oldoutsidefun, oldlowestlevel = lowestlevel;
01430         lowestlevel = 0;
01431         if ( *t > 0 ) {
01432             oldoutsidefun = AC.outsidefun; AC.outsidefun = 0;
01433             WriteExpression(t+ARGHEAD, (LONG)(*t-ARGHEAD));
01434             AC.outsidefun = oldoutsidefun;
01435             goto CleanUp;
01436         }
01437         Out = buffer;
01438         if ( *t == -SNUMBER ) {
01439             NumCopy(t[1], Out);
01440         }
01441         else if ( *t == -SYMBOL ) {
01442             if ( t[1] >= MAXVARIABLES-cbuf[AM.sbufnum].numrhs ) {
01443                 Out = StrCopy(FindExtraSymbol(MAXVARIABLES-t[1]), Out);
01444             }
01445             Out = StrCopy((UBYTE *)AC.extrasym, Out);
01446             if ( AC.extrasymbols == 0 ) {
01447                 Out = NumCopy((MAXVARIABLES-t[1]), Out);
01448                 Out = StrCopy((UBYTE *) "_", Out);
01449             }
01450             else if ( AC.extrasymbols == 1 ) {
01451                 Out = AddArrayIndex((MAXVARIABLES-t[1]), Out);
01452             }
01453         }
01454         /*
01455             else if ( AC.extrasymbols == 2 ) {
01456                 Out = NumCopy((MAXVARIABLES-t[1]), Out);
01457             }

```

```

01458 */
01459     }
01460     else {
01461         StrCopy(FindSymbol(t[1]),Out);
01462     /*      StrCopy(VARNAME(symbols,t[1]),Out); */
01463     }
01464 }
01465 else if ( *t == -VECTOR ) {
01466     if ( t[1] == FUNNYVEC ) { *Out++ = '?'; *Out = 0; }
01467     else
01468         StrCopy(FindVector(t[1]),Out);
01469 /*      StrCopy(VARNAME(vectors,t[1] - AM.OffsetVector),Out); */
01470 }
01471 else if ( *t == -MINVECTOR ) {
01472     *Out++ = '-';
01473     StrCopy(FindVector(t[1]),Out);
01474 /*      StrCopy(VARNAME(vectors,t[1] - AM.OffsetVector),Out); */
01475 }
01476 else if ( *t == -INDEX ) {
01477     if ( t[1] >= 0 ) {
01478         if ( t[1] < AM.OffsetIndex ) { NumCopy(t[1],Out); }
01479         else {
01480             i = t[1];
01481             if ( i >= AM.IndDum ) {
01482                 i -= AM.IndDum;
01483                 *Out++ = 'N';
01484                 Out = NumCopy(i,Out);
01485                 *Out++ = '-';
01486                 *Out++ = '?';
01487                 *Out = 0;
01488             }
01489             else {
01490                 i -= AM.OffsetIndex;
01491                 Out = StrCopy(FindIndex(i%WILDOFFSET+AM.OffsetIndex),Out);
01492 /*      Out = StrCopy(VARNAME(indices,i%WILDOFFSET),Out); */
01493                 if ( i >= WILDOFFSET ) { *Out++ = '?'; *Out = 0; }
01494             }
01495         }
01496     }
01497     else if ( t[1] == FUNNYVEC ) { *Out++ = '?'; *Out = 0; }
01498     else
01499         StrCopy(FindVector(t[1]),Out);
01500 /*      StrCopy(VARNAME(vectors,t[1] - AM.OffsetVector),Out); */
01501 }
01502 else if ( *t == -DOLLAREXPRESSION ) {
01503     DOLLARS d = Dollars + t[1];
01504     *Out++ = '$';
01505     StrCopy(AC.dollarnames->namebuffer+d->name,Out);
01506 }
01507 else if ( *t == -EXPRESSION ) {
01508     StrCopy(EXPRNAME(t[1]),Out);
01509 }
01510 else if ( *t == -SETSET ) {
01511     StrCopy(VARNAME(Sets,t[1]),Out);
01512 }
01513 else if ( *t <= -FUNCTION ) {
01514     StrCopy(FindFunction(-*t),Out);
01515 /*      StrCopy(VARNAME(functions,-*t-FUNCTION),Out); */
01516 }
01517 else {
01518     MesPrint("Illegal function argument while writing");
01519     goto CleanUp;
01520 }
01521 TokenToLine(buffer);
01522 CleanUp:
01523 lowestlevel = oldlowestlevel;
01524 return;
01525 }
01526
01527 /*
01528     #] WriteArgument :
01529     #[ WriteSubTerm :      WORD WriteSubTerm(sterm,first)
01530
01531     Writes a single subterm field to the output line.
01532     There is a recursion for functions.
01533
01534 #define NUMSPECS 8
01535 UBYTE *specfunnames[NUMSPECS] = {
01536     (UBYTE *)"fac", (UBYTE *)"nargs", (UBYTE *)"binom"
01537     , (UBYTE *)"sign", (UBYTE *)"mod", (UBYTE *)"min", (UBYTE *)"max"
01538     , (UBYTE *)"invfac" };
01539 */
01540
01541 int WriteSubTerm(WORD *sterm, WORD first)
01542 {
01543     UBYTE buffer[80];

```

```

01545     UBYTE *Out, closepar[2] = { (UBYTE)'\'', 0};
01546     WORD *stopper, *t, *tt, i, j, po = 0;
01547     int oldoutsidefun;
01548     stopper = sterm + sterm[1];
01549     t = sterm + 2;
01550     switch ( *sterm ) {
01551     case SYMBOL :
01552         while ( t < stopper ) {
01553             if ( lowestlevel && ( ( AO.PrintType & PRINTALL ) != 0 ) ) {
01554                 FiniLine();
01555                 if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
01556                 else IniLine(3);
01557                 if ( first ) TokenToLine((UBYTE *) " ");
01558             }
01559             if ( !first ) MultiplyToLine();
01560             if ( AC.OutputMode == CMODE && t[1] != 1 ) {
01561                 if ( AC.Cnumpows >= t[1] && t[1] > 0 ) {
01562                     po = t[1];
01563                     Out = StrCopy((UBYTE *) "POW",buffer);
01564                     Out = NumCopy(po,Out);
01565                     Out = StrCopy((UBYTE *) "(",Out);
01566                     TokenToLine(buffer);
01567                 }
01568                 else {
01569                     TokenToLine((UBYTE *) "pow(");
01570                 }
01571             }
01572             if ( *t < NumSymbols ) {
01573                 Out = StrCopy(FindSymbol(*t),buffer); t++;
01574                 /* Out = StrCopy(VARNAME(symbols,*t),buffer); t++; */
01575             }
01576             else {
01577                 /*
01578                 see also routine PrintSubtermList.
01579                 */
01580                 Out = StrCopy(FindExtraSymbol(MAXVARIABLES-*t),buffer);
01581                 /*
01582                 Out = StrCopy((UBYTE *) AC.extrasym,buffer);
01583                 if ( AC.extrasymbols == 0 ) {
01584                     Out = NumCopy((MAXVARIABLES-*t),Out);
01585                     Out = StrCopy((UBYTE *) "_",Out);
01586                 }
01587                 else if ( AC.extrasymbols == 1 ) {
01588                     Out = AddArrayIndex((MAXVARIABLES-*t),Out);
01589                 }
01590                 */
01591                 /*
01592                 else if ( AC.extrasymbols == 2 ) {
01593                     Out = NumCopy((MAXVARIABLES-*t),Out);
01594                 }
01595                 */
01596                 t++;
01597             }
01598             if ( AC.OutputMode == CMODE && po > 1
01599                 && AC.Cnumpows >= po ) {
01600                 Out = StrCopy((UBYTE *) ")",Out);
01601                 po = 0;
01602             }
01603             else if ( *t != 1 ) WrtPower(Out,*t);
01604             TokenToLine(buffer);
01605             t++;
01606             first = 0;
01607         }
01608         break;
01609     case VECTOR :
01610         while ( t < stopper ) {
01611             if ( lowestlevel && ( ( AO.PrintType & PRINTALL ) != 0 ) ) {
01612                 FiniLine();
01613                 if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
01614                 else IniLine(3);
01615                 if ( first ) TokenToLine((UBYTE *) " ");
01616             }
01617             if ( !first ) MultiplyToLine();
01618
01619             Out = StrCopy(FindVector(*t),buffer);
01620             /* Out = StrCopy(VARNAME(vectors,*t - AM.OffsetVector),buffer); */
01621             t++;
01622             if ( AC.OutputMode == MATHEMATICAMODE ) *Out++ = '[';
01623             else *Out++ = '(';
01624             if ( *t >= AM.OffsetIndex ) {
01625                 i = *t++;
01626                 if ( i >= AM.IndDum ) {
01627                     i -= AM.IndDum;
01628                     *Out++ = 'N';
01629                     Out = NumCopy(i,Out);
01630                     *Out++ = '_';
01631                     *Out++ = '?';

```

```

01632         *Out = 0;
01633     }
01634     else
01635         Out = StrCopy(FindIndex(i),Out);
01636 /*         Out = StrCopy(VARNAME(indices,i - AM.OffsetIndex),Out); */
01637     }
01638     else if ( *t == FUNNYVEC ) { *Out++ = '?'; *Out = 0; }
01639     else {
01640         Out = NumCopy(*t++,Out);
01641     }
01642     if ( AC.OutputMode == MATHEMATICAMODE ) *Out++ = ']';
01643     else *Out++ = ')';
01644     *Out = 0;
01645     TokenToLine(buffer);
01646     first = 0;
01647 }
01648 break;
01649 case INDEX :
01650     while ( t < stopper ) {
01651         if ( lowestlevel && ( ( AO.PrintType & PRINTALL ) != 0 ) ) {
01652             FiniLine();
01653             if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
01654             else IniLine(3);
01655             if ( first ) TokenToLine((UBYTE *) " ");
01656         }
01657         if ( !first ) MultiplyToLine();
01658         if ( *t >= 0 ) {
01659             if ( *t < AM.OffsetIndex ) {
01660                 TalToLine((UWORD)(*t++));
01661             }
01662             else {
01663                 i = *t++;
01664                 if ( i >= AM.IndDum ) {
01665                     i -= AM.IndDum;
01666                     Out = buffer;
01667                     *Out++ = 'N';
01668                     Out = NumCopy(i,Out);
01669                     *Out++ = '_';
01670                     *Out++ = '?';
01671                     *Out = 0;
01672                 }
01673                 else {
01674                     i -= AM.OffsetIndex;
01675                     Out = StrCopy(FindIndex(i%WILDOFFSET+AM.OffsetIndex),buffer);
01676 /*                     Out = StrCopy(VARNAME(indices,i%WILDOFFSET),buffer); */
01677                     if ( i >= WILDOFFSET ) { *Out++ = '?'; *Out = 0; }
01678                 }
01679                 TokenToLine(buffer);
01680             }
01681         }
01682         else {
01683             TokenToLine(FindVector(*t)); t++;
01684 /*             TokenToLine(VARNAME(vectors,*t - AM.OffsetVector)); t++; */
01685         }
01686         first = 0;
01687     }
01688     break;
01689 case DOLLAREXPRESSION:
01690     {
01691         DOLLARS d = Dollars + sterm[2];
01692         Out = StrCopy((UBYTE *) "$",buffer);
01693         Out = StrCopy(AC.dollarnames->namebuffer+d->name,Out);
01694         if ( sterm[3] != 1 ) WrtPower(Out,sterm[3]);
01695         TokenToLine(buffer);
01696     }
01697     first = 0;
01698     break;
01699 case DELTA :
01700     while ( t < stopper ) {
01701         if ( lowestlevel && ( ( AO.PrintType & PRINTALL ) != 0 ) ) {
01702             FiniLine();
01703             if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
01704             else IniLine(3);
01705             if ( first ) TokenToLine((UBYTE *) " ");
01706         }
01707         if ( !first ) MultiplyToLine();
01708         Out = StrCopy((UBYTE *) "d_",buffer);
01709         if ( *t >= AM.OffsetIndex ) {
01710             if ( *t < AM.IndDum ) {
01711                 Out = StrCopy(FindIndex(*t),Out);
01712 /*                 Out = StrCopy(VARNAME(indices,*t - AM.OffsetIndex),Out); */
01713                 t++;
01714             }
01715             else {
01716                 *Out++ = 'N';
01717                 Out = NumCopy( *t++ - AM.IndDum, Out);
01718                 *Out++ = '_';

```



```

01719         *Out++ = '?';
01720         *Out = 0;
01721     }
01722 }
01723 else if ( *t == FUNNYVEC ) { *Out++ = '?'; *Out = 0; }
01724 else {
01725     Out = NumCopy(*t++,Out);
01726 }
01727 *Out++ = ',';
01728 if ( *t >= AM.OffsetIndex ) {
01729     if ( *t < AM.IndDum ) {
01730         Out = StrCopy(FindIndex(*t),Out);
01731         Out = StrCopy(VARNAME(indices,*t - AM.OffsetIndex),Out); /*
01732         t++;
01733     }
01734     else {
01735         *Out++ = 'N';
01736         Out = NumCopy(*t++ - AM.IndDum,Out);
01737         *Out++ = '_';
01738         *Out++ = '?';
01739     }
01740 }
01741 else {
01742     Out = NumCopy(*t++,Out);
01743 }
01744 *Out++ = ')';
01745 *Out = 0;
01746 TokenToLine(buffer);
01747 first = 0;
01748 }
01749 break;
01750 case DOTPRODUCT :
01751     while ( t < stopper ) {
01752         if ( lowestlevel && ( ( AO.PrintType & PRINTALL ) != 0 ) ) {
01753             FiniLine();
01754             if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
01755             else IniLine(3);
01756             if ( first ) TokenToLine((UBYTE *) " ");
01757         }
01758         if ( !first ) MultiplyToLine();
01759         if ( AC.OutputMode == CMODE && t[2] != 1 )
01760             TokenToLine((UBYTE *) "pow(");
01761         if ( AC.OutputMode == MATHEMATICAMODE )
01762             TokenToLine((UBYTE *) "(");
01763         Out = StrCopy(FindVector(*t),buffer);
01764         Out = StrCopy(VARNAME(vectors,*t - AM.OffsetVector),buffer); /*
01765         t++;
01766         if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
01767             || AC.OutputMode == CMODE )
01768             *Out++ = AO.FortDotChar;
01769         else *Out++ = '.';
01770         Out = StrCopy(FindVector(*t),Out);
01771         Out = StrCopy(VARNAME(vectors,*t - AM.OffsetVector),Out); /*
01772         if ( AC.OutputMode == MATHEMATICAMODE ) {
01773             *Out++ = ')';
01774             *Out = 0;
01775         }
01776         t++;
01777         if ( *t != 1 ) WrtPower(Out,*t);
01778         t++;
01779         TokenToLine(buffer);
01780         first = 0;
01781     }
01782     break;
01783 case EXPONENT :
01784     #if FUNHEAD != 2
01785         t += FUNHEAD - 2;
01786     #endif
01787     if ( !first ) MultiplyToLine();
01788     if ( AC.OutputMode == CMODE ) TokenToLine((UBYTE *) "pow(");
01789     else TokenToLine((UBYTE *) "(");
01790     WriteArgument(t);
01791     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
01792         || AC.OutputMode == REDUCEMODE )
01793         TokenToLine((UBYTE *) ")*(");
01794     else if ( AC.OutputMode == CMODE ) TokenToLine((UBYTE *) ",");
01795     else {
01796         UBYTE *Out1 = IsExponentSign();
01797         if ( Out1 ) {
01798             TokenToLine((UBYTE *) "");
01799             TokenToLine(Out1);
01800             TokenToLine((UBYTE *) "(");
01801         }
01802         else TokenToLine((UBYTE *) "^(");
01803     }
01804     NEXTARG(t)
01805     WriteArgument(t);

```

```

01806         TokenToLine((UBYTE *)"");
01807         break;
01808     case DENOMINATOR :
01809 #if FUNHEAD != 2
01810         t += FUNHEAD - 2;
01811 #endif
01812         if ( first ) TokenToLine((UBYTE *)"1/(");
01813         else TokenToLine((UBYTE *)"/(");
01814         WriteArgument(t);
01815         TokenToLine((UBYTE *)"");
01816         break;
01817     case SUBEXPRESSION:
01818         if ( !first ) MultiplyToLine();
01819         TokenToLine((UBYTE *)"(");
01820         t = cbuf[sterm[4]].rhs[sterm[2]];
01821         tt = t;
01822         while ( *tt ) tt += *tt;
01823         oldoutsidfun = AC.outsidfun; AC.outsidfun = 0;
01824         if ( *t ) {
01825             WriteExpression(t, (LONG)(tt-t));
01826         }
01827         else {
01828             TokenToLine((UBYTE *)"0");
01829         }
01830         AC.outsidfun = oldoutsidfun;
01831         TokenToLine((UBYTE *)"");
01832         if ( sterms[3] != 1 ) {
01833             UBYTE *Out1 = IsExponentSign();
01834             if ( Out1 ) TokenToLine(Out1);
01835             else TokenToLine((UBYTE *)"^");
01836             Out = buffer;
01837             NumCopy(sterms[3], Out);
01838             TokenToLine(buffer);
01839         }
01840         break;
01841     default :
01842         if ( lowestlevel && ( ( AO.PrintType & PRINTALL ) != 0 ) ) {
01843             FiniLine();
01844             if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
01845             else IniLine(3);
01846             if ( first ) TokenToLine((UBYTE *)" ");
01847         }
01848         if ( *sterm < FUNCTION ) {
01849             return(MesPrint("Illegal subterm while writing"));
01850         }
01851         if ( !first ) MultiplyToLine();
01852         first = 1;
01853         { UBYTE *tmp;
01854             if ( ( tmp = FindFunWithArgs(sterm) ) != 0 ) {
01855                 TokenToLine(tmp);
01856                 break;
01857             }
01858         }
01859         t += FUNHEAD-2;
01860
01861         if ( *sterm == GAMMA && t[-FUNHEAD+1] == FUNHEAD+1 ) {
01862             TokenToLine((UBYTE *)"gi_");
01863         }
01864         else {
01865             if ( *sterm != DUMFUN ) {
01866                 Out = StrCopy(FindFunction(*sterm), buffer);
01867                 Out = StrCopy(VARNAME(functions, *sterm - FUNCTION), buffer); /*
01868             }
01869             else { Out = buffer; *Out = 0; }
01870             if ( t >= stopper ) {
01871                 TokenToLine(buffer);
01872                 break;
01873             }
01874             if ( AC.OutputMode == MATHEMATICAMODE ) { *Out++ = '['; closepar[0] = (UBYTE)']'; }
01875             else { *Out++ = '('; }
01876             *Out = 0;
01877             TokenToLine(buffer);
01878         }
01879         i = functions[*sterm - FUNCTION].spec;
01880         if ( i >= TENSORFUNCTION ) {
01881             int curdict = AO.CurrentDictionary;
01882             if ( AO.CurrentDictionary && AO.CurDictNotInFunctions > 0 )
01883                 AO.CurrentDictionary = 0;
01884             t = sterms + FUNHEAD;
01885             while ( t < stopper ) {
01886                 if ( !first ) TokenToLine((UBYTE *)",");
01887                 else first = 0;
01888                 j = *t++;
01889                 if ( j >= 0 ) {
01890                     if ( j < AM.OffsetIndex ) TalToLine((UWORD)(j));
01891                     else if ( j < AM.IndDum ) {
01892                         i = j - AM.OffsetIndex;

```

```

01893                                     Out = StrCopy(FindIndex(i%WILDOFFSET+AM.OffsetIndex),buffer);
01894 /*                                     Out = StrCopy(VARNAME(indices,i%WILDOFFSET),buffer); */
01895                                     if ( i >= WILDOFFSET ) { *Out++ = '?'; *Out = 0; }
01896                                     TokenToLine(buffer);
01897                                     }
01898                                     else {
01899                                         Out = buffer;
01900                                         *Out++ = 'N';
01901                                         Out = NumCopy(j - AM.IndDum,Out);
01902                                         *Out++ = '_';
01903                                         *Out++ = '?';
01904                                         *Out = 0;
01905                                         TokenToLine(buffer);
01906                                     }
01907                                     }
01908                                     else if ( j == FUNNYVEC ) { TokenToLine((UBYTE *)"?"); }
01909                                     else if ( j > -WILDOFFSET ) {
01910                                         Out = buffer;
01911                                         Out = NumCopy((UWORD)(-j + 4),Out);
01912                                         *Out++ = '_';
01913                                         *Out = 0;
01914                                         TokenToLine(buffer);
01915                                     }
01916                                     else {
01917                                         TokenToLine(FindVector(j));
01918 /*                                     TokenToLine(VARNAME(vectors,j - AM.OffsetVector)); */
01919                                     }
01920                                     }
01921                                     AO.CurrentDictionary = curdict;
01922                                     }
01923                                     else {
01924                                         int curdict = AO.CurrentDictionary;
01925                                         if ( AO.CurrentDictionary && AO.CurDictNotInFunctions > 0 )
01926                                             AO.CurrentDictionary = 0;
01927                                         while ( t < stopper ) {
01928                                             if ( !first ) TokenToLine((UBYTE *)",");
01929                                             WriteArgument(t);
01930                                             NEXTARG(t);
01931                                             first = 0;
01932                                         }
01933                                         AO.CurrentDictionary = curdict;
01934                                     }
01935                                     TokenToLine(closepar);
01936                                     closepar[0] = (UBYTE)'\'';
01937                                     break;
01938                                     }
01939                                     return(0);
01940     }
01941
01942 /*
01943     #] WriteSubTerm :
01944     #[ WriteInnerTerm :      WORD WriteInnerTerm(term,first)
01945
01946     Writes the contents of term to the output.
01947     Only the part that is inside parentheses is written.
01948
01949 */
01950
01951 int WriteInnerTerm(WORD *term, WORD first)
01952 {
01953     WORD *t, *s, *s1, *s2, n, i, pow;
01954 #ifdef WITHFLOAT
01955     int FloatChars = 0;
01956     GETIDENTITY
01957 #endif
01958     t = term;
01959     s = t+1;
01960     GETCOEF(t,n);
01961     while ( s < t ) {
01962         if ( *s == HAAKJE ) break;
01963         s += s[1];
01964     }
01965     if ( s < t ) { s += s[1]; }
01966     else { s = term+1; }
01967
01968     if ( n < 0 || !first ) {
01969         if ( n > 0 ) { TOKENTOLINE(" + ","+") }
01970         else if ( n < 0 ) { n = -n; TOKENTOLINE(" - ","-") }
01971     }
01972     if ( AC.modpowers ) {
01973         if ( n == 1 && *t == 1 && t > s ) first = 1;
01974         else if ( ABS(AC.ncmod) == 1 ) {
01975             UBYTE *Out1 = IsExponentSign();
01976             LongToLine((UWORD *)AC.powmod,AC.npowmod);
01977             if ( Out1 ) TokenToLine(Out1);
01978             else TokenToLine((UBYTE *)"^");
01979             TalToLine(AC.modpowers[(LONG)((UWORD)*t)]);

```

```

01980         first = 0;
01981     }
01982     else {
01983         LONG jj;
01984         UBYTE *Out1 = IsExponentSign();
01985         LongToLine((UWORD *)AC.powmod,AC.npowmod);
01986         if ( Out1 ) TokenToLine(Out1);
01987         else TokenToLine((UBYTE *)"^");
01988         jj = (UWORD)*t;
01989         if ( n == 2 ) jj += ((LONG)t[1])«BITSINWORD;
01990         if ( AC.modpowers[jj+1] == 0 ) {
01991             TalToLine(AC.modpowers[jj]);
01992         }
01993         else {
01994             LongToLine(AC.modpowers+jj,2);
01995         }
01996         first = 0;
01997     }
01998 }
01999 else if ( n != 1 || *t != 1 || t[1] != 1 || t <= s ) {
02000     if ( lowestlevel && ( ( AO.PrintType & PRINTONEFUNCTION ) != 0 ) ) {
02001         FiniLine();
02002         if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
02003         else IniLine(3);
02004     }
02005     if ( AO.CurrentDictionary > 0 ) TransformRational((UWORD *)t,n);
02006     else RatToLine((UWORD *)t,n);
02007     first = 0;
02008 }
02009 #ifdef WITHFLOAT
02010 /*
02011     Check whether there is a 'proper' float_ function and no raw mode.
02012     If so, print as float.
02013     Raw mode is indicated as AO.FloatPrec < 0.
02014     AO.FloatPrec == 0 indicated as many digits as the precision allows.
02015 */
02016 else if ( AO.FloatPrec >= 0 && AT.aux_ != 0 ) {
02017     WORD *ss = s;
02018     while ( ss < t ) {
02019         if ( *ss == FLOATFUN ) {
02020             if ( ( FloatChars = PrintFloat(ss,AO.FloatPrec) ) != 0 ) {
02021                 TokenToLine(AO.floatspace);
02022                 if ( AC.IsFortran90 == ISFORTRAN90 && AC.Fortran90Kind ) {
02023                     AddToLine(AC.Fortran90Kind);
02024                 }
02025                 first = 0;
02026             }
02027             break;
02028         }
02029         ss += ss[1];
02030     }
02031     if ( ss >= t ) first = 1;
02032 }
02033 #endif
02034 else first = 1;
02035 while ( s < t ) {
02036     if ( lowestlevel && ( ( AO.PrintType & (PRINTONEFUNCTION | PRINTALL)) == PRINTONEFUNCTION ) ) {
02037         FiniLine();
02038         if ( AC.OutputSpaces == NOSPACEFORMAT ) IniLine(1);
02039         else IniLine(3);
02040     }
02041 }
02042 /*
02043     #[ NEWGAMMA :
02044 */
02045 #ifdef NEWGAMMA
02046     if ( *s == GAMMA ) {      /* String them up */
02047         WORD *tt,*ss;
02048         ss = AT.WorkPointer;
02049         *ss++ = GAMMA;
02050         *ss++ = s[1];
02051         FILLFUN(ss)
02052         *ss++ = s[FUNHEAD];
02053         tt = s + FUNHEAD + 1;
02054         n = s[1] - FUNHEAD-1;
02055         do {
02056             while ( --n >= 0 ) *ss++ = *tt++;
02057             tt = s + s[1];
02058             while ( *tt == GAMMA && tt[FUNHEAD] == s[FUNHEAD] && tt < t ) {
02059                 s = tt;
02060                 tt += FUNHEAD + 1;
02061                 n = s[1] - FUNHEAD-1;
02062                 if ( n > 0 ) break;
02063             }
02064             while ( n > 0 );
02065             tt = AT.WorkPointer;
02066             AT.WorkPointer = ss;

```

```

02067         tt[1] = WORDDIF(ss,tt);
02068         if ( WriteSubTerm(tt,first) ) {
02069             MesCall("WriteInnerTerm");
02070             SETERROR(-1)
02071         }
02072         AT.WorkPointer = tt;
02073     }
02074     else
02075 #endif
02076 /*
02077     #] NEWGAMMA :
02078 */
02079 #ifdef WITHFLOAT
02080     if ( *s == FLOATFUN && AO.FloatPrec >= 0 && AT.aux_ != 0 ) {
02081     }
02082     else
02083 #endif
02084     {
02085         if ( *s >= FUNCTION && AC.funpowers > 0
02086             && functions[*s-FUNCTION].spec == 0 && ( AC.funpowers == ALLFUNPOWERS ||
02087             ( AC.funpowers == COMFUNPOWERS && functions[*s-FUNCTION].commute == 0 ) ) ) {
02088             pow = 1;
02089             for(;;) {
02090                 s1 = s; s2 = s + s[1]; i = s[1];
02091                 if ( s2 < t ) {
02092                     while ( --i >= 0 && *s1 == *s2 ) { s1++; s2++; }
02093                     if ( i < 0 ) {
02094                         pow++; s = s+s[1];
02095                     }
02096                     else break;
02097                 }
02098                 else break;
02099             }
02100             if ( pow > 1 ) {
02101                 if ( AC.OutputMode == CMODE ) {
02102                     if ( !first ) MultiplyToLine();
02103                     TokenToLine((UBYTE *) "pow(");
02104                     first = 1;
02105                 }
02106                 if ( WriteSubTerm(s,first) ) {
02107                     MesCall("WriteInnerTerm");
02108                     SETERROR(-1)
02109                 }
02110                 if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE
02111                     || AC.OutputMode == REDUCEMODE ) { TokenToLine((UBYTE *) "***"); }
02112                 else if ( AC.OutputMode == CMODE ) { TokenToLine((UBYTE *) ","); }
02113                 else {
02114                     UBYTE *Out1 = IsExponentSign();
02115                     if ( Out1 ) TokenToLine(Out1);
02116                     else TokenToLine((UBYTE *) "^");
02117                 }
02118                 TalToLine(pow);
02119                 if ( AC.OutputMode == CMODE ) TokenToLine((UBYTE *) ")");
02120             }
02121             else if ( WriteSubTerm(s,first) ) {
02122                 MesCall("WriteInnerTerm");
02123                 SETERROR(-1)
02124             }
02125         }
02126         else if ( WriteSubTerm(s,first) ) {
02127             MesCall("WriteInnerTerm");
02128             SETERROR(-1)
02129         }
02130     }
02131     first = 0;
02132     s += s[1];
02133 }
02134 return(0);
02135 }
02136
02137 /*
02138     #] WriteInnerTerm :
02139     #[ WriteTerm :           WORD WriteTerm(term,lbrac,first,prtf,br)
02140
02141     Writes a term to output. It tests the bracket information first.
02142     If there are no brackets or the bracket is the same all is passed
02143     to WriteInnerTerm. If there are brackets and the bracket is not
02144     the same as for the predecessor the old bracket is closed and
02145     a new one is opened.
02146     br indicates whether we are in a subexpression, barring zeroing
02147     AO.IsBracket
02148
02149 */
02150
02151 int WriteTerm(WORD *term, WORD *lbrac, WORD first, WORD prtf, WORD br)
02152 {
02153     WORD *t, *stopper, *b, n;

```

```

02154     int oldIsFortran90 = AC.IsFortran90, i;
02155     if ( *lbrac >= 0 ) {
02156         t = term + 1;
02157         stopper = (term + *term - 1);
02158         stopper -= ABS(*stopper) - 1;
02159         while ( t < stopper ) {
02160             if ( *t == HAAKJE ) {
02161                 stopper = t;
02162                 t = term+1;
02163                 if ( *lbrac == ( n = WORDDIF(stopper,t) ) ) {
02164                     b = AO.bracket + 1;
02165                     t = term + 1;
02166                     while ( n > 0 && ( *b++ == *t++ ) ) { n--; }
02167                     if ( n <= 0 && ( ( AM.FortranCont <= 0 || AO.InFbrack < AM.FortranCont )
02168                         || ( lowestlevel == 0 ) ) ) {
02169                         /*
02170                             We continue inside a bracket.
02171                         */
02172                         AO.IsBracket = 1;
02173                         if ( ( prtf & PRINTCONTENTS ) != 0 ) {
02174                             AO.NumInBrack++;
02175                         }
02176                         else {
02177                             if ( WriteInnerTerm(term,0) ) goto WrtTmes;
02178                             if ( ( AO.PrintType & PRINTONETERM ) != 0 ) {
02179                                 FiniLine();
02180                                 TokenToLine((UBYTE *) "    ");
02181                             }
02182                         }
02183                         return(0);
02184                     }
02185                     t = term + 1;
02186                     n = WORDDIF(stopper,t);
02187                 }
02188             /*
02189                 Close the bracket
02190             */
02191             if ( *lbrac ) {
02192                 if ( ( prtf & PRINTCONTENTS ) ) PrtTerms();
02193                 TOKENTOline(" ",")");
02194                 if ( AC.OutputMode == CMODE && AO.FactorMode == 0 )
02195                     TokenToLine((UBYTE *) " ");
02196                 else if ( AO.FactorMode && ( n == 0 ) ) {
02197                     /*
02198                         This should not happen.
02199                     */
02200                     return(0);
02201                 }
02202                 AC.IsFortran90 = ISNOTFORTRAN90;
02203                 FiniLine();
02204                 AC.IsFortran90 = oldIsFortran90;
02205                 if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE
02206                     && AC.OutputSpaces == NORMALFORMAT
02207                     && AO.FactorMode == 0 ) FiniLine();
02208             }
02209             else {
02210                 if ( AC.OutputMode == CMODE && AO.FactorMode == 0 )
02211                     TokenToLine((UBYTE *) " ");
02212                 if ( AO.FortFirst == 0 ) {
02213                     if ( !first ) {
02214                         AC.IsFortran90 = ISNOTFORTRAN90;
02215                         FiniLine();
02216                         AC.IsFortran90 = oldIsFortran90;
02217                     }
02218                 }
02219             }
02220             if ( AO.FactorMode == 0 ) {
02221                 if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02222                     && !first ) {
02223                     WORD oldmode = AC.OutputMode;
02224                     AC.OutputMode = 0;
02225                     IniLine(0);
02226                     AC.OutputMode = oldmode;
02227                     AO.OutSkip = 7;
02228                 }
02229                 if ( AO.FortFirst == 0 ) {
02230                     TokenToLine(AO.CurBufWrt);
02231                     TOKENTOline(" = ","=")
02232                     TokenToLine(AO.CurBufWrt);
02233                 }
02234                 else {
02235                     AO.FortFirst = 0;
02236                     TokenToLine(AO.CurBufWrt);
02237                     TOKENTOline(" = ","=")
02238                 }
02239             }
02240             else if ( AC.OutputMode == CMODE && !first ) {

```

```

02241         IniLine(0);
02242     if ( AO.FortFirst == 0 ) {
02243         TokenToLine(AO.CurBufWrt);
02244         TOKENTOLINE(" += ", "+=")
02245     }
02246     else {
02247         AO.FortFirst = 0;
02248         TokenToLine(AO.CurBufWrt);
02249         TOKENTOLINE(" = ", "=")
02250     }
02251 }
02252 else if ( startinline == 0 ) {
02253     IniLine(0);
02254 }
02255 AO.InFbrack = 0;
02256 if ( ( *lbrac = n ) > 0 ) {
02257     b = AO.bracket;
02258     *b++ = n + 4;
02259     while ( --n >= 0 ) *b++ = *t++;
02260     *b++ = 1; *b++ = 1; *b = 3;
02261     AO.IsBracket = 0;
02262     if ( WriteInnerTerm(AO.bracket,0) ) {
02263         /* Error message */
02264         WORD i;
02265         t = term;
02266         AO.OutSkip = 3;
02267         FiniLine();
02268         i = *t;
02269         while ( --i >= 0 ) { TalToLine((UWORD)(t++));
02270             if ( AC.OutputSpaces == NORMALFORMAT )
02271                 TokenToLine((UBYTE *)" "); }
02272         AO.OutSkip = 0;
02273         FiniLine();
02274         MesCall("WriteTerm");
02275         SETERROR(-1)
02276     }
02277     TOKENTOLINE(" * ( ", "*(")
02278     AO.NumInBrack = 0;
02279     AO.IsBracket = 1;
02280     if ( ( prt & PRINTONETERM ) != 0 ) {
02281         first = 0;
02282         FiniLine();
02283         TokenToLine((UBYTE *)" ");
02284     }
02285     else first = 1;
02286 }
02287 else {
02288     AO.IsBracket = 0;
02289     first = 0;
02290 }
02291 }
02292 else {
02293     /*
02294     Here is the code that writes the glue between two factors.
02295     We should not forget factors that are zero!
02296     */
02297     if ( ( *lbrac = n ) > 0 ) {
02298         b = AO.bracket;
02299         *b++ = n + 4;
02300         while ( --n >= 0 ) *b++ = *t++;
02301         *b++ = 1; *b++ = 1; *b = 3;
02302         for ( i = AO.FactorNum+1; i < AO.bracket[4]; i++ ) {
02303             if ( first ) {
02304                 TOKENTOLINE(" ( 0 )", "(0)")
02305                 first = 0;
02306             }
02307             else {
02308                 TOKENTOLINE(" * ( 0 )", "*(0)")
02309             }
02310             FiniLine();
02311             IniLine(0);
02312         }
02313         AO.FactorNum = AO.bracket[4];
02314     }
02315     else {
02316         AO.NumInBrack = 0;
02317         return(0);
02318     }
02319     if ( first == 0 ) { TOKENTOLINE(" * ( ", "*(") }
02320     else { TOKENTOLINE(" ( ", "(" ) }
02321     AO.NumInBrack = 0;
02322     first = 1;
02323 }
02324 if ( ( prt & PRINTCONTENTS ) != 0 ) AO.NumInBrack++;
02325 else if ( WriteInnerTerm(term,first) ) goto WrtTmes;
02326 if ( ( AO.PrintType & PRINTONETERM ) != 0 ) {
02327     FiniLine();

```

```

02328         TokenToLine((UBYTE *) " ");
02329     }
02330     return(0);
02331 }
02332 else t += t[1];
02333 }
02334 if ( *lbrac > 0 ) {
02335     if ( ( prtfl & PRINTCONTENTS ) != 0 ) PrtTerms();
02336     TokenToLine((UBYTE *) " ");
02337     if ( AC.OutputMode == CMODE ) TokenToLine((UBYTE *) "");
02338     if ( AO.FortFirst == 0 ) {
02339         AC.IsFortran90 = ISNOTFORTRAN90;
02340         FiniLine();
02341         AC.IsFortran90 = oldIsFortran90;
02342     }
02343     if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE
02344         && AC.OutputSpaces == NORMALFORMAT ) FiniLine();
02345     if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02346         && !first ) {
02347         WORD oldmode = AC.OutputMode;
02348         AC.OutputMode = 0;
02349         IniLine(0);
02350         AC.OutputMode = oldmode;
02351         AO.OutSkip = 7;
02352         if ( AO.FortFirst == 0 ) {
02353             TokenToLine(AO.CurBufWrt);
02354             TOKENTOLINE(" = ", "=");
02355             TokenToLine(AO.CurBufWrt);
02356         }
02357         else {
02358             AO.FortFirst = 0;
02359             TokenToLine(AO.CurBufWrt);
02360             TOKENTOLINE(" = ", "=");
02361         }
02362         /*
02363             TokenToLine(AO.CurBufWrt);
02364             TOKENTOLINE(" = ", "=");
02365             if ( AO.FortFirst == 0 )
02366                 TokenToLine(AO.CurBufWrt);
02367             else AO.FortFirst = 0;
02368         */
02369     }
02370     else if ( AC.OutputMode == CMODE && !first ) {
02371         IniLine(0);
02372         if ( AO.FortFirst == 0 ) {
02373             TokenToLine(AO.CurBufWrt);
02374             TOKENTOLINE(" += ", "+=");
02375         }
02376         else {
02377             AO.FortFirst = 0;
02378             TokenToLine(AO.CurBufWrt);
02379             TOKENTOLINE(" = ", "=");
02380         }
02381         /*
02382             TokenToLine(AO.CurBufWrt);
02383             if ( AO.FortFirst == 0 ) { TOKENTOLINE(" += ", "+=") }
02384             else {
02385                 TOKENTOLINE(" = ", "=");
02386                 AO.FortFirst = 0;
02387             }
02388         */
02389     }
02390     else IniLine(0);
02391     *lbrac = 0;
02392     first = 1;
02393 }
02394 }
02395 if ( !br ) AO.IsBracket = 0;
02396 if ( ( AM.FortranCont > 0 && AO.InFbrack >= AM.FortranCont ) && lowestlevel ) {
02397     if ( AC.OutputMode == CMODE ) TokenToLine((UBYTE *) "");
02398     if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02399         && !first ) {
02400         WORD oldmode = AC.OutputMode;
02401         if ( AO.FortFirst == 0 ) {
02402             AC.IsFortran90 = ISNOTFORTRAN90;
02403             FiniLine();
02404             AC.IsFortran90 = oldIsFortran90;
02405             AC.OutputMode = 0;
02406             IniLine(0);
02407             AC.OutputMode = oldmode;
02408             AO.OutSkip = 7;
02409             TokenToLine(AO.CurBufWrt);
02410             TOKENTOLINE(" = ", "=");
02411             TokenToLine(AO.CurBufWrt);
02412         }
02413         else {
02414             AO.FortFirst = 0;

```



```

02415 /*
02416         TokenToLine(AO.CurBufWrt);
02417         TOKENTOLINE(" = ", "=")
02418 */
02419     }
02420 /*
02421         TokenToLine(AO.CurBufWrt);
02422         TOKENTOLINE(" = ", "=")
02423         if ( AO.FortFirst == 0 )
02424             TokenToLine(AO.CurBufWrt);
02425         else AO.FortFirst = 0;
02426 */
02427     }
02428     else if ( AC.OutputMode == CMODE && !first ) {
02429         FiniLine();
02430         IniLine(0);
02431         if ( AO.FortFirst == 0 ) {
02432             TokenToLine(AO.CurBufWrt);
02433             TOKENTOLINE(" += ", "+=")
02434         }
02435         else {
02436             AO.FortFirst = 0;
02437             TokenToLine(AO.CurBufWrt);
02438             TOKENTOLINE(" = ", "=")
02439         }
02440 /*
02441         TokenToLine(AO.CurBufWrt);
02442         if ( AO.FortFirst == 0 ) { TOKENTOLINE(" += ", "+=") }
02443         else {
02444             TOKENTOLINE(" = ", "=")
02445             AO.FortFirst = 0;
02446         }
02447 */
02448     }
02449     else {
02450         FiniLine();
02451         IniLine(0);
02452     }
02453     AO.InFbrack = 0;
02454 }
02455 if ( WriteInnerTerm(term,first) ) goto WrtTmes;
02456 if ( ( AO.PrintType & PRINTONETERM ) != 0 ) {
02457     FiniLine();
02458     IniLine(0);
02459 }
02460 return(0);
02461 }
02462
02463 /*
02464     #] WriteTerm :
02465     #[ WriteExpression :      WORD WriteExpression(terms,ltot)
02466
02467     Writes a subexpression to output.
02468     The subexpression is in terms and contains ltot words.
02469     This is only used for function arguments.
02470
02471 */
02472
02473 int WriteExpression(WORD *terms, LONG ltot)
02474 {
02475     WORD *stopper;
02476     WORD first, btot;
02477     WORD OldIsBracket = AO.IsBracket, OldPrintType = AO.PrintType;
02478     if ( !AC.outsidefun ) { AO.PrintType &= ~PRINTONETERM; first = 1; }
02479     else first = 0;
02480     stopper = terms + ltot;
02481     btot = -1;
02482     while ( terms < stopper ) {
02483         AO.IsBracket = OldIsBracket;
02484         if ( WriteTerm(terms,&btot,first,0,1) ) {
02485             MesCall("WriteExpression");
02486             SETERROR(-1)
02487         }
02488         first = 0;
02489         terms += *terms;
02490     }
02491 /* AO.IsBracket = 0; */
02492     AO.IsBracket = OldIsBracket;
02493     AO.PrintType = OldPrintType;
02494     return(0);
02495 }
02496
02497 /*
02498     #] WriteExpression :
02499     #[ WriteAll :          WORD WriteAll()
02500
02501     Writes all expressions that should be written

```

```

02502 */
02503
02504 int WriteAll(void)
02505 {
02506     GETIDENTITY
02507     WORD lbrac, first;
02508     WORD *t, *stopper, n, prtf;
02509     int oldIsFortran90 = AC.IsFortran90, i;
02510     POSITION pos;
02511     FILEHANDLE *f;
02512     EXPRESSIONS e;
02513     if ( AM.exitflag ) return(0);
02514 #ifdef WITHMPI
02515     if ( PF.me != MASTER ) {
02516         /*
02517          * For the slaves, we need to call Optimize() the same number of times
02518          * as the master. The first argument doesn't have any important role.
02519          */
02520         for ( n = 0; n < NumExpressions; n++ ) {
02521             e = &Expressions[n];
02522             if ( (!e->printflag) & PRINTON ) continue;
02523             switch ( e->status ) {
02524                 case LOCALEXPRESSSION:
02525                 case GLOBALEXPRESSSION:
02526                 case UNHIDELEXPRESSSION:
02527                 case UNHIDEGEXPRESSSION:
02528                     break;
02529                 default:
02530                     continue;
02531             }
02532             e->printflag = 0;
02533             PutPreVar(AM.oldnumextrasymbols, GetPreVar((UBYTE *)"EXTRASMBOLS_", 0), 0, 1);
02534             if ( AO.OptimizationLevel > 0 ) {
02535                 if ( Optimize(0, 1) ) return(-1);
02536             }
02537         }
02538         return(0);
02539     }
02540 #endif
02541     SeekScratch(AR.outfile, &pos);
02542     if ( ResetScratch() ) {
02543         MesCall("WriteAll");
02544         SETERROR(-1)
02545     }
02546     AO.termbuf = AT.WorkPointer;
02547     AO.bracket = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer);
02548     AT.WorkPointer = (WORD *)(((UBYTE *) (AT.WorkPointer)) + AM.MaxTer*2);
02549     AO.OutFill = AO.OutputLine = (UBYTE *)AT.WorkPointer;
02550     AT.WorkPointer += 2*AC.LineLength;
02551     *(AR.CompressBuffer) = 0;
02552     first = 0;
02553     for ( n = 0; n < NumExpressions; n++ ) {
02554         if ( ( Expressions[n].printflag & PRINTON ) != 0 ) { first = 1; break; }
02555     }
02556     if ( !first ) goto EndWrite;
02557     AO.IsBracket = 0;
02558     AO.OutSkip = 3;
02559     AR.DeferFlag = 0;
02560     while ( GetTerm(BHEAD AO.termbuf) ) {
02561         t = AO.termbuf + 1;
02562         e = Expressions + AO.termbuf[3];
02563         n = e->status;
02564         if ( ( n == LOCALEXPRESSSION || n == GLOBALEXPRESSSION
02565             || n == UNHIDELEXPRESSSION || n == UNHIDEGEXPRESSSION ) &&
02566             ( ( prtf = e->printflag ) & PRINTON ) != 0 ) {
02567             e->printflag = 0;
02568             AO.NumInBrack = 0;
02569             PutPreVar(AM.oldnumextrasymbols,
02570                 GetPreVar((UBYTE *)"EXTRASMBOLS_", 0), 0, 1);
02571             if ( ( prtf & PRINTLFILE ) != 0 ) {
02572                 if ( AC.LogHandle < 0 ) prtf &= ~PRINTLFILE;
02573             }
02574             AO.PrintType = prtf;
02575             /*
02576             if ( AC.OutputMode == VORTTRANMODE ) {
02577                 UBYTE *oldOutFill = AO.OutFill, *oldOutputLine = AO.OutputLine;
02578                 AO.OutSkip = 6;
02579                 if ( Optimize(AO.termbuf[3], 1) ) goto AboWrite;
02580                 AO.OutSkip = 3;
02581                 AO.OutFill = oldOutFill; AO.OutputLine = oldOutputLine;
02582                 FiniLine();
02583                 continue;
02584             }
02585             else
02586             */
02587             if ( AO.OptimizationLevel > 0 ) {
02588                 UBYTE *oldOutFill = AO.OutFill, *oldOutputLine = AO.OutputLine;

```

```

02589         AO.OutSkip = 6;
02590         if ( Optimize(AO.termbuf[3], 1) ) goto AboWrite;
02591         AO.OutSkip = 3;
02592         AO.OutFill = oldOutFill; AO.OutputLine = oldOutputLine;
02593         FiniLine();
02594         continue;
02595     }
02596     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02597         AO.OutSkip = 6;
02598     FiniLine();
02599     AO.CurBufWrt = EXPRNAME(AO.termbuf[3]);
02600     TokenToLine(AO.CurBufWrt);
02601     stopper = t + t[1];
02602     t += SUBEXPSIZE;
02603     if ( t < stopper ) {
02604         TokenToLine((UBYTE *) "(");
02605         first = 1;
02606         while ( t < stopper ) {
02607             n = *t;
02608             if ( !first ) TokenToLine((UBYTE *) ",");
02609             switch ( n ) {
02610                 case SYMTOSYM :
02611                     TokenToLine(FindSymbol(t[2]));
02612                     TokenToLine(VARNAME(symbols,t[2])); /*
02613                     break;
02614                 case VECTOVEC :
02615                     TokenToLine(FindVector(t[2]));
02616                     TokenToLine(VARNAME(vectors,t[2] - AM.OffsetVector)); /*
02617                     break;
02618                 case INDTOIND :
02619                     TokenToLine(FindIndex(t[2]));
02620                     TokenToLine(VARNAME(indices,t[2] - AM.OffsetIndex)); /*
02621                     break;
02622                 default :
02623                     TokenToLine(FindFunction(t[2]));
02624                     TokenToLine(VARNAME(functions,t[2] - FUNCTION)); /*
02625                     break;
02626             }
02627             t += t[1];
02628             first = 0;
02629         }
02630         TokenToLine((UBYTE *) ")");
02631     }
02632     TOKENTOLINE(" =", "=");
02633     if ( AC.OutputMode == MATHEMATICAMODE ) {
02634         TOKENTOLINE(" (", "(");
02635     }
02636     lbrac = 0;
02637     AO.InFbrack = 0;
02638     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02639         AO.FortFirst = 1;
02640     else
02641         AO.FortFirst = 0;
02642     first = 1;
02643     if ( ( e->vflags & ISFACTORIZED ) != 0 ) {
02644         AO.FactorMode = 1+e->numfactors;
02645         AO.FactorNum = 0; /* Which factor are we doing. For factors that are zero */
02646     }
02647     else {
02648         AO.FactorMode = 0;
02649     }
02650     while ( GetTerm(BHEAD AO.termbuf) ) {
02651         WORD *m;
02652         GETSTOP(AO.termbuf,m);
02653         if ( ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02654             && ( ( prtf & PRINTONETERM ) != 0 ) ) {}
02655         else {
02656             if ( first ) {
02657                 FiniLine();
02658                 IniLine(0);
02659             }
02660             if ( ( prtf & PRINTONETERM ) != 0 ) first = 0;
02661             if ( WriteTerm(AO.termbuf,&lbrac,first,prtf,0) )
02662                 goto AboWrite;
02663             first = 0;
02664         }
02665     }
02666     if ( AO.FactorMode ) {
02667         if ( first ) { AO.FactorNum = 1; TOKENTOLINE(" ( 0 )", "(0)") }
02668         else TOKENTOLINE(" )", ")");
02669         for ( i = AO.FactorNum+1; i <= e->numfactors; i++ ) {
02670             FiniLine();
02671             IniLine(0);
02672             TOKENTOLINE(" * ( 0 )", "* (0)");
02673         }
02674         AO.FactorNum = e->numfactors;
02675         if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE )

```

```

02676             TokenToLine((UBYTE *)";");
02677         }
02678         else if ( AO.FactorMode == 0 || first ) {
02679             if ( first ) { TOKENTOLINE(" 0","0") }
02680             else if ( lbrac ) {
02681                 if ( ( prtf & PRINTCONTENTS ) != 0 ) PrtTerms();
02682                 TOKENTOLINE(" )","")
02683             }
02684             else if ( ( prtf & PRINTCONTENTS ) != 0 ) {
02685                 TOKENTOLINE(" + 1 * ( ","+1*(")
02686                 PrtTerms();
02687                 TOKENTOLINE(" )","")
02688             }
02689             if ( AC.OutputMode == MATHEMATICAMODE ) {
02690                 TokenToLine((UBYTE *)");");
02691             }
02692             if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE )
02693                 TokenToLine((UBYTE *)";");
02694         }
02695         AO.OutSkip = 3;
02696         AC.IsFortran90 = ISNOTFORTRAN90;
02697         FiniLine();
02698         AC.IsFortran90 = oldIsFortran90;
02699         AO.FactorMode = 0;
02700     }
02701     else {
02702         do { } while ( GetTerm(BHEAD AO.termbuf) );
02703     }
02704 }
02705 if ( AC.OutputSpaces == NORMALFORMAT ) FiniLine();
02706 EndWrite:
02707 if ( AR.infile->handle >= 0 ) {
02708     SeekFile(AR.infile->handle,&(AR.infile->filesize),SEEK_SET);
02709 }
02710 AO.IsBracket = 0;
02711 AT.WorkPointer = AO.termbuf;
02712 SetScratch(AR.infile,&pos);
02713 f = AR.outfile; AR.outfile = AR.infile; AR.infile = f;
02714 return(0);
02715 AboWrite:
02716 SetScratch(AR.infile,&pos);
02717 f = AR.outfile; AR.outfile = AR.infile; AR.infile = f;
02718 MesCall("WriteAll");
02719 Terminate(-1);
02720 return(-1);
02721 }
02722
02723 /*
02724 #] WriteAll :
02725 #[ WriteOne :          WORD WriteOne(name,alreadyinline)
02726
02727 Writes one expression from the preprocessor
02728 */
02729
02730 int WriteOne(UBYTE *name, int alreadyinline, int nosemi, WORD plus)
02731 {
02732     GETIDENTITY
02733     WORD number;
02734     WORD lbrac, first;
02735     POSITION pos;
02736     FILEHANDLE *f;
02737     WORD prf;
02738
02739     if ( GetName(AC.exprnames,name,&number,NOAUTO) != CEXPRESSION ) {
02740         MesPrint("@%s is not an expression",name);
02741         return(-1);
02742     }
02743     switch ( Expressions[number].status ) {
02744         case HIDDENLEXPRESSION:
02745         case HIDDENGEXPRESSION:
02746         case HIDELEXPRESSION:
02747         case HIDEGEXPRESSION:
02748         case UNHIDELEXPRESSION:
02749         case UNHIDEGEXPRESSION:
02750     /*
02751         case DROPHLEXPRESSION:
02752         case DROPHGEXPRESSION:
02753     */
02754         AR.GetFile = 2;
02755         break;
02756         case LOCALEXPRESSION:
02757         case GLOBALEXPRESSION:
02758         case SKIPLEXPRESSION:
02759         case SKIPGEXPRESSION:
02760     /*
02761         case DROPLEXPRESSION:
02762         case DROPGEXPRESSION:

```

```

02763 */
02764         AR.GetFile = 0;
02765         break;
02766     default:
02767         MesPrint("@expressions %s is not active. It cannot be written",name);
02768         return(-1);
02769     }
02770     SeekScratch(AR.outfile,&pos);
02771
02772     f = AR.outfile; AR.outfile = AR.infile; AR.infile = f;
02773 /*
02774     if ( ResetScratch() ) {
02775         MesCall("WriteOne");
02776         SETERROR(-1)
02777     }
02778 */
02779     if ( AR.GetFile == 2 ) f = AR.hidefile;
02780     else f = AR.infile;
02781     prf = Expressions[number].printflag;
02782     if ( plus ) prf |= PRINTONETERM;
02783 /*
02784         Now position the file
02785 */
02786     if ( f->handle >= 0 ) {
02787         SetScratch(f,&(Expressions[number].onfile));
02788     }
02789     else {
02790         f->POfill = (WORD *) ((UBYTE *) (f->PObuffer)
02791             + BASEPOSITION(Expressions[number].onfile));
02792     }
02793     AO.termbuf = AT.WorkPointer;
02794     AO.bracket = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer;
02795     AT.WorkPointer = (WORD *) ((UBYTE *) (AT.WorkPointer)) + AM.MaxTer*2;
02796
02797     AO.OutFill = AO.OutputLine = (UBYTE *) AT.WorkPointer;
02798     AT.WorkPointer += 2*AC.LineLength;
02799     *(AR.CompressBuffer) = 0;
02800
02801     AO.IsBracket = 0;
02802     AO.OutSkip = 3;
02803     AR.DeferFlag = 0;
02804
02805     if ( AC.OutputMode == FORTRANMODE || AC.OutputMode == PFORTRANMODE )
02806         AO.OutSkip = 6;
02807     if ( GetTerm(BHEAD AO.termbuf) <= 0 ) {
02808         MesPrint("@ReadError in expression %s",name);
02809         goto AboWrite;
02810     }
02811 /*
02812     PutPreVar(AM.oldnumextrasymbols,
02813         GetPreVar((UBYTE *) "EXTRASYMBOLS_",0),0,1);
02814 */
02815 /*
02816     * Currently WriteOne() is called only from writeToChannel() with setting
02817     * AO.OptimizationLevel = 0, which means Optimize() is never called here.
02818     * So we don't need to think about how to ensure that the master and the
02819     * slaves call Optimize() at the same time. (TU 26 Jul 2013)
02820 */
02821     if ( AO.OptimizationLevel > 0 ) {
02822         AO.OutSkip = 6;
02823         if ( Optimize(AO.termbuf[3], 1) ) goto AboWrite;
02824         AO.OutSkip = 3;
02825         FiniLine();
02826     }
02827     else {
02828         lbrac = 0;
02829         AO.InFbrack = 0;
02830         AO.FortFirst = 0;
02831         first = 1;
02832         while ( GetTerm(BHEAD AO.termbuf) ) {
02833             WORD *m;
02834             GETSTOP(AO.termbuf,m);
02835             if ( first ) {
02836                 IniLine(0);
02837                 startinline = alreadyinline;
02838                 AO.OutFill = AO.OutputLine + startinline;
02839                 if ( WriteTerm(AO.termbuf,&lbrac,first,0,0) )
02840                     goto AboWrite;
02841                 first = 0;
02842             }
02843             else {
02844                 if ( ( prf & PRINTONETERM ) != 0 ) first = 1;
02845                 if ( first ) {
02846                     FiniLine();
02847                     IniLine(0);
02848                 }
02849                 first = 0;

```

```


02850             if ( WriteTerm(AO.termbuf,&lbrac,first,0,0) )
02851                 goto AboWrite;
02852         }
02853     }
02854     if ( first ) {
02855         IniLine(0);
02856         startinline = alreadyinline;
02857         AO.OutFill = AO.OutputLine + startinline;
02858         TOKENTOLINE(" 0","0");
02859     }
02860     else if ( lbrac ) {
02861         TOKENTOLINE(" )","");
02862     }
02863     if ( AC.OutputMode != FORTRANMODE && AC.OutputMode != PFORTRANMODE
02864         && nosemi == 0 ) TokenToLine((UBYTE *) "");
02865     AO.OutSkip = 3;
02866     if ( AC.OutputSpaces == NORMALFORMAT && nosemi == 0 ) {
02867         FiniLine();
02868     }
02869     else {
02870         noextralinefeed = 1;
02871         FiniLine();
02872         noextralinefeed = 0;
02873     }
02874 }
02875 AO.IsBracket = 0;
02876 AT.WorkPointer = AO.termbuf;
02877 SetScratch(f,&pos);
02878 f = AR.outfile; AR.outfile = AR.infile; AR.infile = f;
02879 AO.InFbrack = 0;
02880 return(0);
02881 AboWrite:
02882 SetScratch(AR.infile,&pos);
02883 f->PPosition = pos;
02884 f = AR.outfile; AR.outfile = AR.infile; AR.infile = f;
02885 MesCall("WriteOne");
02886 Terminate(-1);
02887 return(-1);
02888 }
02889
02890 /*
02891     #] WriteOne :
02892     #] schryf-Writes :
02893 */

```

4.127 setfile.c File Reference

```
#include "form3.h"
```

Include dependency graph for setfile.c:

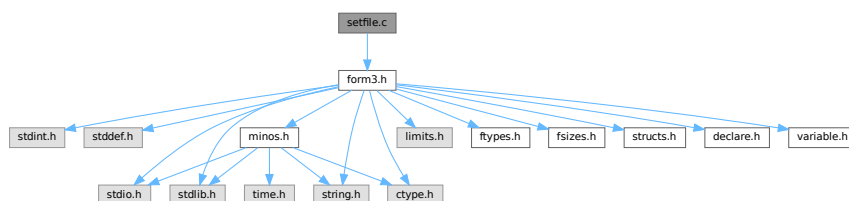

Macros

- #define NUMERICALVALUE 0
- #define STRINGVALUE 1
- #define PATHVALUE 2
- #define ONOFFVALUE 3
- #define DEFINEVALUE 4
- #define SETBUFSIZE 257

Functions

- int [DoSetups](#) (void)
- int [ProcessOption](#) (UBYTE *s1, UBYTE *s2, int filetype)
- [SETUPPARAMETERS](#) * [GetSetupPar](#) (UBYTE *s)
- int [RecalcSetups](#) (void)
- int [AllocSetups](#) (void)
- void [WriteSetup](#) (void)
- [SORTING](#) * [AllocSort](#) (LONG inLargeSize, LONG inSmallSize, LONG inSmallEsize, LONG inTermsInSmall, int inMaxPatches, int inMaxFpatches, LONG inIOsize, int level)
- void [AllocSortFileName](#) ([SORTING](#) *sort)
- [FILEHANDLE](#) * [AllocFileHandle](#) (WORD par, char *name)
- void [DeAllocFileHandle](#) ([FILEHANDLE](#) *fh)
- int [MakeSetupAllocs](#) (void)
- int [TryFileSetups](#) (void)
- int [TryEnvironment](#) (void)

Variables

- char [curdirp](#) [] = "."
- char [cursortdirp](#) [] = "."
- char [commentchar](#) [] = "*"
- char [dotchar](#) [] = "_"
- char [highfirst](#) [] = "highfirst"
- char [lowfirst](#) [] = "lowfirst"
- char [procedureextension](#) [] = "prc"
- [SETUPPARAMETERS](#) [setupparameters](#) []

4.127.1 Detailed Description

The routines that deal with the setup parameters.

Definition in file [setfile.c](#).

4.127.2 Macro Definition Documentation

4.127.2.1 NUMERICALVALUE

```
#define NUMERICALVALUE 0
```

Definition at line 47 of file [setfile.c](#).

4.127.2.2 STRINGVALUE

```
#define STRINGVALUE 1
```

Definition at line 48 of file [setfile.c](#).

4.127.2.3 PATHVALUE

```
#define PATHVALUE 2
```

Definition at line 49 of file [setfile.c](#).

4.127.2.4 ONOFFVALUE

```
#define ONOFFVALUE 3
```

Definition at line 50 of file [setfile.c](#).

4.127.2.5 DEFINEVALUE

```
#define DEFINEVALUE 4
```

Definition at line 51 of file [setfile.c](#).

4.127.2.6 SETBUFSIZE

```
#define SETBUFSIZE 257
```

Definition at line 1129 of file [setfile.c](#).

4.127.3 Function Documentation

4.127.3.1 DoSetups()

```
int DoSetups (  
    void )
```

Definition at line 132 of file [setfile.c](#).

4.127.3.2 ProcessOption()

```
int ProcessOption (  
    UBYTE * s1,  
    UBYTE * s2,  
    int filetype )
```

Definition at line 182 of file [setfile.c](#).

4.127.3.3 GetSetupPar()

```
SETUPPARAMETERS * GetSetupPar (  
    UBYTE * s )
```

Definition at line 337 of file [setfile.c](#).

4.127.3.4 RecalcSetups()

```
int RecalcSetups (
    void )
```

Definition at line 358 of file [setfile.c](#).

4.127.3.5 AllocSetups()

```
int AllocSetups (
    void )
```

Definition at line 405 of file [setfile.c](#).

4.127.3.6 WriteSetup()

```
void WriteSetup (
    void )
```

Definition at line 800 of file [setfile.c](#).

4.127.3.7 AllocSort()

```
SORTING * AllocSort (
    LONG inLargeSize,
    LONG inSmallSize,
    LONG inSmallEsize,
    LONG inTermsInSmall,
    int inMaxPatches,
    int inMaxFpatches,
    LONG inIOSize,
    int level )
```

Definition at line 858 of file [setfile.c](#).

4.127.3.8 AllocSortFileName()

```
void AllocSortFileName (
    SORTING * sort )
```

Definition at line 1008 of file [setfile.c](#).

4.127.3.9 AllocFileHandle()

```
FILEHANDLE * AllocFileHandle (
    WORD par,
    char * name )
```

Definition at line 1033 of file [setfile.c](#).

4.127.3.10 DeAllocFileHandle()

```
void DeAllocFileHandle (
    FILEHANDLE * fh )
```

Definition at line 1094 of file [setfile.c](#).

4.127.3.11 MakeSetupAllocs()

```
int MakeSetupAllocs (
    void )
```

Definition at line 1111 of file [setfile.c](#).

4.127.3.12 TryFileSetups()

```
int TryFileSetups (
    void )
```

Definition at line 1131 of file [setfile.c](#).

4.127.3.13 TryEnvironment()

```
int TryEnvironment (
    void )
```

Definition at line 1217 of file [setfile.c](#).

4.127.4 Variable Documentation

4.127.4.1 curdirp

```
char curdirp[] = "."
```

Definition at line 39 of file [setfile.c](#).

4.127.4.2 cursortdirp

```
char cursortdirp[] = "."
```

Definition at line 40 of file [setfile.c](#).

4.127.4.3 commentchar

```
char commentchar[] = "*"
```

Definition at line 41 of file [setfile.c](#).

4.127.4.4 dotchar

```
char dotchar[] = "_"
```

Definition at line 42 of file [setfile.c](#).

4.127.4.5 highfirst

```
char highfirst[] = "highfirst"
```

Definition at line 43 of file [setfile.c](#).

4.127.4.6 lowfirst

```
char lowfirst[] = "lowfirst"
```

Definition at line 44 of file [setfile.c](#).

4.127.4.7 procedureextension

```
char procedureextension[] = "prc"
```

Definition at line 45 of file [setfile.c](#).

4.127.4.8 setupparameters

```
SETUPPARAMETERS setupparameters[]
```

Definition at line 53 of file [setfile.c](#).

4.128 setfile.c

[Go to the documentation of this file.](#)

```
00001
00005 /* # [ License : */
00006 /*
00007 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008 * When using this file you are requested to refer to the publication
00009 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010 * This is considered a matter of courtesy as the development was paid
00011 * for by FOM the Dutch physics granting agency and we would like to
00012 * be able to track its scientific use to convince FOM of its value
00013 * for the community.
00014 *
00015 * This file is part of FORM.
00016 *
00017 * FORM is free software: you can redistribute it and/or modify it under the
00018 * terms of the GNU General Public License as published by the Free Software
00019 * Foundation, either version 3 of the License, or (at your option) any later
00020 * version.
00021 *
00022 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025 * details.
00026 *
```

```

00027 *   You should have received a copy of the GNU General Public License along
00028 *   with FORM.  If not, see <http://www.gnu.org/licenses/>.
00029 */
00030 /* #] License : */
00031 /*
00032     #[ Includes :
00033
00034     Routines that deal with settings and the setup file
00035 */
00036
00037 #include "form3.h"
00038
00039 char curdirp[] = ".";
00040 char cursortdirp[] = ".";
00041 char commentchar[] = "*";
00042 char dotchar[] = "_";
00043 char highfirst[] = "highfirst";
00044 char lowfirst[] = "lowfirst";
00045 char procedureextension[] = "prc";
00046
00047 #define NUMERICALVALUE 0
00048 #define STRINGVALUE 1
00049 #define PATHVALUE 2
00050 #define ONOFFVALUE 3
00051 #define DEFINEVALUE 4
00052
00053 SETUPPARAMETERS setupparameters[] =
00054 {
00055     {(UBYTE *) "bracketindexsize", NUMERICALVALUE, 0, (LONG) MAXBRACKETBUFFERSIZE}
00056     , {(UBYTE *) "commentchar", STRINGVALUE, 0, (LONG) commentchar}
00057     , {(UBYTE *) "compresssize", NUMERICALVALUE, 0, (LONG) COMPRESSBUFFER}
00058     , {(UBYTE *) "constindex", NUMERICALVALUE, 0, (LONG) NUMFIXED}
00059     , {(UBYTE *) "continuationlines", NUMERICALVALUE, 0, (LONG) FORTRANCONTINUATIONLINES}
00060 #ifdef WITHFLOAT
00061     , {(UBYTE *) "defaultprecision", NUMERICALVALUE, 0, (LONG) DEFAULTTPRECISION}
00062 #endif
00063     , {(UBYTE *) "define", DEFINEVALUE, 0, (LONG) 0}
00064     , {(UBYTE *) "dotchar", STRINGVALUE, 0, (LONG) dotchar}
00065     , {(UBYTE *) "factorizationcache", NUMERICALVALUE, 0, (LONG) FBUFFERSIZE}
00066     , {(UBYTE *) "filepatches", NUMERICALVALUE, 0, (LONG) MAXFPATCHES}
00067     , {(UBYTE *) "functionlevels", NUMERICALVALUE, 0, (LONG) MAXFLEVELS}
00068     , {(UBYTE *) "hidesize", NUMERICALVALUE, 0, (LONG) 0}
00069     , {(UBYTE *) "indir", PATHVALUE, 0, (LONG) curdirp}
00070     , {(UBYTE *) "indentspace", NUMERICALVALUE, 0, (LONG) INDENTSPACE}
00071     , {(UBYTE *) "insidefirst", ONOFFVALUE, 0, (LONG) 1}
00072     , {(UBYTE *) "jumpratio", NUMERICALVALUE, 0, (LONG) JUMPRATIO}
00073     , {(UBYTE *) "largepatches", NUMERICALVALUE, 0, (LONG) MAXPATCHES}
00074     , {(UBYTE *) "largesize", NUMERICALVALUE, 0, (LONG) LARGEBUFFER}
00075     , {(UBYTE *) "maxnumbersize", NUMERICALVALUE, 0, (LONG) 0}
00076 /* , {(UBYTE *) "maxnumbersize", NUMERICALVALUE, 0, (LONG) MAXNUMBERSIZE} */
00077     , {(UBYTE *) "maxtermsize", NUMERICALVALUE, 0, (LONG) MAXTER}
00078 #ifdef WITHFLOAT
00079     , {(UBYTE *) "maxweight", NUMERICALVALUE, 0, (LONG) MAXWEIGHT}
00080 #endif
00081     , {(UBYTE *) "maxwildcards", NUMERICALVALUE, 0, (LONG) MAXWILDC}
00082     , {(UBYTE *) "nospacesinnnumbers", ONOFFVALUE, 0, (LONG) 0}
00083     , {(UBYTE *) "numstorecaches", NUMERICALVALUE, 0, (LONG) NUMSTORECACHES}
00084     , {(UBYTE *) "nwritefinalstatistics", ONOFFVALUE, 0, (LONG) 0}
00085     , {(UBYTE *) "nwriteprocessstatistics", ONOFFVALUE, 0, (LONG) 0}
00086     , {(UBYTE *) "nwritestatistics", ONOFFVALUE, 0, (LONG) 0}
00087     , {(UBYTE *) "nwritethreadstatistics", ONOFFVALUE, 0, (LONG) 0}
00088     , {(UBYTE *) "oldfactarg", ONOFFVALUE, 0, (LONG) NEWFACTARG}
00089     , {(UBYTE *) "oldqcd", ONOFFVALUE, 0, (LONG) 1}
00090     , {(UBYTE *) "oldorder", ONOFFVALUE, 0, (LONG) 0}
00091     , {(UBYTE *) "oldparallelstatistics", ONOFFVALUE, 0, (LONG) 0}
00092     , {(UBYTE *) "parentheses", NUMERICALVALUE, 0, (LONG) MAXPARLEVEL}
00093     , {(UBYTE *) "path", PATHVALUE, 0, (LONG) curdirp}
00094     , {(UBYTE *) "procedureextension", STRINGVALUE, 0, (LONG) procedureextension}
00095     , {(UBYTE *) "processbucketsize", NUMERICALVALUE, 0, (LONG) DEFAULTPROCESSBUCKETSIZE}
00096     , {(UBYTE *) "resettimeonclear", ONOFFVALUE, 0, (LONG) 1}
00097     , {(UBYTE *) "scratchsize", NUMERICALVALUE, 0, (LONG) SCRATCHSIZE}
00098     , {(UBYTE *) "shmwinsize", NUMERICALVALUE, 0, (LONG) SHMWINSIZE}
00099     , {(UBYTE *) "sizestorecache", NUMERICALVALUE, 0, (LONG) SIZESTORECACHE}
00100     , {(UBYTE *) "smallextension", NUMERICALVALUE, 0, (LONG) SMALLOVERFLOW}
00101     , {(UBYTE *) "smallsize", NUMERICALVALUE, 0, (LONG) SMALLBUFFER}
00102     , {(UBYTE *) "sortiosize", NUMERICALVALUE, 0, (LONG) SORTIOSIZE}
00103     , {(UBYTE *) "sorttype", STRINGVALUE, 0, (LONG) lowfirst}
00104     , {(UBYTE *) "spectatorsize", NUMERICALVALUE, 0, (LONG) SPECTATORSIZE}
00105     , {(UBYTE *) "subfilepatches", NUMERICALVALUE, 0, (LONG) SMAXFPATCHES}
00106     , {(UBYTE *) "sublargepatches", NUMERICALVALUE, 0, (LONG) SMAXPATCHES}
00107     , {(UBYTE *) "sublargesize", NUMERICALVALUE, 0, (LONG) SLARGEBUFFER}
00108     , {(UBYTE *) "subsmallextension", NUMERICALVALUE, 0, (LONG) SSMAILOVERFLOW}
00109     , {(UBYTE *) "subsmallsize", NUMERICALVALUE, 0, (LONG) SSMAILLBUFFER}
00110     , {(UBYTE *) "subsortiosize", NUMERICALVALUE, 0, (LONG) SSORTIOSIZE}
00111     , {(UBYTE *) "subtermsinsmall", NUMERICALVALUE, 0, (LONG) STERMSSMALL}
00112     , {(UBYTE *) "tempdir", STRINGVALUE, 0, (LONG) curdirp}
00113     , {(UBYTE *) "tempsortdir", STRINGVALUE, 0, (LONG) cursortdirp}

```

```

00114     ,{(UBYTE *)"termsinsmall",          NUMERICALVALUE, 0, (LONG)TERMSSMALL}
00115     ,{(UBYTE *)"threadbucketsize",      NUMERICALVALUE, 0, (LONG)DEFAULTTHREADBUCKETSIZE}
00116     ,{(UBYTE *)"threadloadbalancing",    ONOFFVALUE, 0, (LONG)DEFAULTTHREADLOADBALANCING}
00117     ,{(UBYTE *)"threads",               NUMERICALVALUE, 0, (LONG)DEFAULTTHREADS}
00118     ,{(UBYTE *)"threadscratchoutsize",   NUMERICALVALUE, 0, (LONG)THREADSCRATCHOUTSIZE}
00119     ,{(UBYTE *)"threadscratchsize",      NUMERICALVALUE, 0, (LONG)THREADSCRATCHSIZE}
00120     ,{(UBYTE *)"threadsortfilesynch",    ONOFFVALUE, 0, (LONG)0}
00121     ,{(UBYTE *)"totalsize",              ONOFFVALUE, 0, (LONG)2}
00122     ,{(UBYTE *)"workspace",             NUMERICALVALUE, 0, (LONG)WORKBUFFER}
00123     ,{(UBYTE *)"wtimestats",             ONOFFVALUE, 0, (LONG)2}
00124 };
00125
00126 /*
00127     #] Includes :
00128     #[ Setups :
00129         #[ DoSetups :
00130 */
00131
00132 int DoSetups(void)
00133 {
00134     UBYTE *setbuffer, *s, *t, *u /*, c */;
00135     int errors = 0;
00136     setbuffer = LoadInputFile((UBYTE *)setupfilename,SETUPFILE);
00137     if ( setbuffer ) {
00138 /*
00139         The contents of the file are now in setbuffer.
00140         Each line is commentary or a single command.
00141         The buffer is terminated with a zero.
00142 */
00143         s = setbuffer;
00144         while ( *s ) {
00145             if ( *s == ' ' || *s == '\t' || *s == '*' || *s == '#' || *s == '\n' ) {
00146                 while ( *s && *s != '\n' ) s++;
00147             }
00148             else if ( tolower(*s) < 'a' || tolower(*s) > 'z' ) {
00149                 t = s;
00150                 while ( *s && *s != '\n' ) s++;
00151 /*
00152                 c = *s; *s = 0;
00153                 Error1("Setup file: Illegal statement: ",t);
00154                 errors++; *s = c;
00155 */
00156             }
00157             else {
00158                 t = s; /* name of the option */
00159                 while ( tolower(*s) >= 'a' && tolower(*s) <= 'z' ) s++;
00160                 *s++ = 0;
00161                 while ( *s == ' ' || *s == '\t' ) s++;
00162                 u = s; /* 'value' of the option */
00163                 while ( *s && *s != '\n' && *s != '\r' ) s++;
00164                 if ( *s ) *s++ = 0;
00165                 errors += ProcessOption(t,u,0);
00166             }
00167             while ( *s == '\n' || *s == '\r' ) s++;
00168         }
00169         M_free(setbuffer,"setup file buffer");
00170     }
00171     if ( errors ) return(1);
00172     else return(0);
00173 }
00174
00175 /*
00176     #] DoSetups :
00177     #[ ProcessOption :
00178 */
00179
00180 static char *proopl[3] = { "Setup file", "Setups in .frm file", "Setup in environment" };
00181
00182 int ProcessOption(UBYTE *s1, UBYTE *s2, int filetype)
00183 {
00184     SETUPPARAMETERS *sp;
00185     int n, giveback = 0, error = 0;
00186     UBYTE *s, *t, *s2ret;
00187     LONG x;
00188     sp = GetSetupPar(s1);
00189     if ( sp ) {
00190 /*
00191         We check now whether there are ` ' variables to be looked up in the
00192         environment. This is new (30-may-2008). This is only allowed in s2.
00193 */
00194 restart:;
00195         {
00196             UBYTE *s3,*s4,*s5,*s6, c, *start;
00197             int n1,n2,n3;
00198             s = s2;
00199             while ( *s ) {
00200                 if ( *s == '\\ ' ) s += 2;

```

```

00201         else if ( *s == ' ' ) {
00202             start = s; s++;
00203             while ( *s && *s != '\n' ) {
00204                 if ( *s == '\\ ' ) s++;
00205                 s++;
00206             }
00207             if ( *s == 0 ) {
00208                 MesPrint("%s: Illegal use of ` character for parameter %s"
00209                     ,proopl[filetype],s1);
00210                 return(1);
00211             }
00212             c = *s; *s = 0;
00213             s3 = (UBYTE *)getenv((char *) (start+1));
00214             if ( s3 == 0 ) {
00215                 MesPrint("%s: Cannot find environment variable %s for parameter %s"
00216                     ,proopl[filetype],start+1,s1);
00217                 return(1);
00218             }
00219             }
00220             *s = c; s++;
00221             n1 = start - s2; s4 = s3; n2 = 0;
00222             while ( *s4 ) {
00223                 if ( *s4 == '\\ ' ) { s4++; n2++; }
00224                 s4++; n2++;
00225             }
00226             s4 = s; n3 = 0;
00227             while ( *s4 ) {
00228                 if ( *s4 == '\\ ' ) { s4++; n3++; }
00229                 s4++; n3++;
00230             }
00231             s4 = (UBYTE *)Malloc1((n1+n2+n3+1)*sizeof(UBYTE),"environment in setup");
00232             s5 = s2; s6 = s4;
00233             while ( n1-- > 0 ) *s6++ = *s5++;
00234             s5 = s3;
00235             while ( n2-- > 0 ) *s6++ = *s5++;
00236             s5 = s;
00237             while ( n3-- > 0 ) *s6++ = *s5++;
00238             *s6 = 0;
00239             if ( giveback ) M_free(s2,"environment in setup");
00240             s2 = s4;
00241             giveback = 1;
00242             goto restart;
00243         }
00244         else s++;
00245     }
00246 }
00247 n = sp->type;
00248 s2ret = s2;
00249 switch ( n ) {
00250     case NUMERICALVALUE:
00251         ParseNumber(x,s2);
00252         if ( *s2 == 'K' ) { x = x * 1000; s2++; }
00253         else if ( *s2 == 'M' ) { x = x * 1000000; s2++; }
00254         else if ( *s2 == 'G' ) { x = x * 1000000000; s2++; }
00255         else if ( *s2 == 'T' ) { x = x * 1000000000000; s2++; }
00256         if ( *s2 && *s2 != ' ' && *s2 != '\t' ) {
00257             MesPrint("%s: Numerical value expected for parameter %s"
00258                 ,proopl[filetype],s1);
00259             error = 1; break;
00260         }
00261         sp->value = x;
00262         sp->flags = USEDFLAG;
00263         break;
00264     case STRINGVALUE:
00265         if ( StrICmp(s1,(UBYTE *)"tempsortdir") == 0 ) AM.havesortdir = 1;
00266         s = s2; t = s2;
00267         while ( *s ) {
00268             if ( *s == ' ' || *s == '\t' ) break;
00269             if ( *s == '\\ ' ) s++;
00270             *t++ = *s++;
00271         }
00272         *t = 0;
00273         if ( sp->flags == USEDFLAG && sp->value != 0 )
00274             M_free((void *) (sp->value),"Process option");
00275         sp->value = (LONG)strDupl(s2,"Process option");
00276         sp->flags = USEDFLAG;
00277         break;
00278     case PATHVALUE:
00279         if ( StrICmp(s1,(UBYTE *)"incdir") == 0 ) {
00280             AM.IncDir = 0;
00281         }
00282         else if ( StrICmp(s1,(UBYTE *)"path") == 0 ) {
00283             if ( AM.Path ) M_free(AM.Path,"path");
00284             AM.Path = 0;
00285         }
00286         else {
00287             MesPrint("Setups: %s not yet implemented",s1);

```

```

00288         error = 1;
00289         break;
00290     }
00291     if ( sp->flags == USEDFLAG && sp->value != 0 )
00292         M_free((void *) (sp->value), "Process option");
00293     sp->value = (LONG)strDup1(s2, "Process option");
00294     sp->flags = USEDFLAG;
00295     break;
00296 case ONOFFVALUE:
00297     if ( tolower(*s2) == 'o' && tolower(s2[1]) == 'n'
00298         && ( s2[2] == 0 || s2[2] == ' ' || s2[2] == '\t' ) )
00299         sp->value = 1;
00300     else if ( tolower(*s2) == 'o' && tolower(s2[1]) == 'f'
00301         && tolower(s2[2]) == 'f'
00302         && ( s2[3] == 0 || s2[3] == ' ' || s2[3] == '\t' ) )
00303         sp->value = 0;
00304     else {
00305         MesPrint("%s: Unrecognized option for parameter %s: %s"
00306             , proopl[filetype], s1, s2);
00307         error = 1; break;
00308     }
00309     sp->flags = USEDFLAG;
00310     break;
00311 case DEFINEVALUE:
00312 /*
00313     if ( sp->value ) M_free((UBYTE *) (sp->value), "Process option");
00314     sp->value = (LONG)strDup1(s2, "Process option");
00315 */
00316     if ( TheDefine(s2,2) ) error = 1;
00317     break;
00318 default:
00319     Error1("Error in setupparameter table for:", s1);
00320     error = 1;
00321     break;
00322 }
00323 }
00324 else {
00325     MesPrint("%s: Keyword not recognized: %s", proopl[filetype], s1);
00326     error = 1;
00327 }
00328 if ( giveback ) M_free(s2ret, "environment in setup");
00329 return(error);
00330 }
00331
00332 /*
00333     #] ProcessOption :
00334     #[ GetSetupPar :
00335 */
00336
00337 SETUPPARAMETERS *GetSetupPar(UBYTE *s)
00338 {
00339     int hi, med, lo, i;
00340     lo = 0;
00341     /* -1: remove possibility of out-of-bounds read in StrICmp
00342     hi = sizeof(setupparameters)/sizeof(SETUPPARAMETERS) - 1;
00343     do {
00344         med = ( hi + lo ) / 2;
00345         i = StrICmp(s, (UBYTE *)setupparameters[med].parameter);
00346         if ( i == 0 ) return(setupparameters+med);
00347         if ( i < 0 ) hi = med-1;
00348         else lo = med+1;
00349     } while ( hi >= lo );
00350     return(0);
00351 }
00352
00353 /*
00354     #] GetSetupPar :
00355     #[ RecalcSetups :
00356 */
00357
00358 int RecalcSetups(void)
00359 {
00360     SETUPPARAMETERS *sp, *spl;
00361
00362     spl = GetSetupPar((UBYTE *) "threads");
00363     if ( AM.totalnumberofthreads > 1 ) spl->value = AM.totalnumberofthreads - 1;
00364     else spl->value = 0;
00365 /*
00366     if ( spl->value > 0 ) AM.totalnumberofthreads = spl->value+1;
00367     if ( AM.totalnumberofthreads == 0 ) AM.totalnumberofthreads = 1;
00368 */
00369     sp = GetSetupPar((UBYTE *) "filepatches");
00370     if ( sp->value < AM.totalnumberofthreads-1 )
00371         sp->value = AM.totalnumberofthreads - 1;
00372
00373     sp = GetSetupPar((UBYTE *) "smallsize");
00374     spl = GetSetupPar((UBYTE *) "smallestextension");

```

```

00375     if ( 6*sp1->value < 7*sp->value ) sp1->value = (7*sp->value)/6;
00376     sp = GetSetupPar((UBYTE *)"termsinsmall");
00377     sp->value = ( sp->value + 15 ) & (~16L);
00378 #ifdef WITHPTHREADS
00379     {
00380         SETUPPARAMETERS *sp2;
00381         LONG totalsize, minimumsize;
00382         sp = GetSetupPar((UBYTE *)"largesize");
00383         totalsize = sp1->value+sp->value;
00384         sp2 = GetSetupPar((UBYTE *)"maxtermsize");
00385         AM.MaxTer = sp2->value*sizeof(WORD);
00386         if ( AM.MaxTer < 200*(LONG)(sizeof(WORD)) ) AM.MaxTer = 200*(LONG)(sizeof(WORD));
00387         if ( AM.MaxTer > MAXPOSITIVE - 200*(LONG)(sizeof(WORD)) ) AM.MaxTer = MAXPOSITIVE -
200*(LONG)(sizeof(WORD));
00388         AM.MaxTer /= sizeof(WORD);
00389         AM.MaxTer *= sizeof(WORD);
00390         minimumsize = (AM.totalnumberofthreads-1)*(AM.MaxTer+
00391             NUMBEROFBLOCKSINSORT*MINIMUMNUMBEROFTERMS*AM.MaxTer);
00392         if ( totalsize < minimumsize ) {
00393             sp->value = minimumsize - sp1->value;
00394         }
00395     }
00396 #endif
00397     return(0);
00398 }
00399
00400 /*
00401     #] RecalcSetups :
00402     #[ AllocSetups :
00403 */
00404
00405 int AllocSetups(void)
00406 {
00407     SETUPPARAMETERS *sp;
00408     LONG LargeSize, SmallSize, SmallEsize, TermsInSmall, IOSize;
00409     int MaxPatches, MaxFpatches, error = 0, i, size;
00410     UBYTE *s;
00411 #ifdef WITHPTHREADS
00412     int j;
00413 #endif
00414     sp = GetSetupPar((UBYTE *)"threads");
00415     if ( sp->value > 0 ) AM.totalnumberofthreads = sp->value+1;
00416
00417     AM.OutBuffer = (UBYTE *)Malloc1(AM.OutBufSize+1,"OutputBuffer");
00418     AP.PreAssignStack = (LONG *)Malloc1(AP.MaxPreAssignLevel*sizeof(LONG *),"PreAssignStack");
00419     for ( i = 0; i < AP.MaxPreAssignLevel; i++ ) AP.PreAssignStack[i] = 0;
00420     AC.iBuffer = (UBYTE *)Malloc1(AC.iBufferSize+1,"statement buffer");
00421     AC.iStop = AC.iBuffer + AC.iBufferSize-2;
00422     AP.preStart = (UBYTE *)Malloc1(AP.pSize,"instruction buffer");
00423     AP.preStop = AP.preStart + AP.pSize - 3;
00424     /* AP.PreIfStack is already allocated in StartPrepro(), but to be sure we
00425        "if" the freeing */
00426     if ( AP.PreIfStack ) M_free(AP.PreIfStack,"PreIfStack");
00427     AP.PreIfStack = (int *)Malloc1(AP.MaxPreIfLevel*sizeof(int),
00428         "Preprocessor if stack");
00429     AP.PreIfStack[0] = EXECUTINGIF;
00430     sp = GetSetupPar((UBYTE *)"insidefirst");
00431     AM.ginsidefirst = AC.minsidefirst = AC.insidefirst = sp->value;
00432 /*
00433     We need to consider eliminating this variable
00434 */
00435     sp = GetSetupPar((UBYTE *)"maxtermsize");
00436     AM.MaxTer = sp->value*sizeof(WORD);
00437     if ( AM.MaxTer < 200*(LONG)(sizeof(WORD)) ) AM.MaxTer = 200*(LONG)(sizeof(WORD));
00438     if ( AM.MaxTer > MAXPOSITIVE - 200*(LONG)(sizeof(WORD)) ) AM.MaxTer = MAXPOSITIVE -
200*(LONG)(sizeof(WORD));
00439     AM.MaxTer /= (LONG)sizeof(WORD);
00440     AM.MaxTer *= (LONG)sizeof(WORD);
00441 /*
00442     Allocate workspace.
00443 */
00444     sp = GetSetupPar((UBYTE *)"workspace");
00445     AM.WorkSize = sp->value;
00446 #ifdef WITHPTHREADS
00447 #else
00448     AT.WorkSpace = (WORD *)Malloc1(AM.WorkSize*sizeof(WORD), (char *) (sp->parameter));
00449     AT.WorkTop = AT.WorkSpace + AM.WorkSize;
00450     AT.WorkPointer = AT.WorkSpace;
00451 #endif
00452 /*
00453     Fixed indices
00454 */
00455     sp = GetSetupPar((UBYTE *)"constindex");
00456     if ( ( sp->value+100+5*WILDOFFSET ) > MAXPOSITIVE ) {
00457         MesPrint("Setting of %s in setupfile too large","constindex");
00458         AM.OffsetIndex = MAXPOSITIVE - 5*WILDOFFSET - 100;
00459         MesPrint("value corrected to maximum allowed: %d",AM.OffsetIndex);

```



```

00460     }
00461     else AM.OffsetIndex = sp->value + 1;
00462     AC.FixIndices = (WORD *)Malloc1((AM.OffsetIndex)*sizeof(WORD), (char *) (sp->parameter));
00463     AM.WilInd = AM.OffsetIndex + WILDOFFSET;
00464     AM.DumInd = AM.OffsetIndex + 2*WILDOFFSET;
00465     AM.IndDum = AM.DumInd + WILDOFFSET;
00466 #ifndef WITHPTHREADS
00467     AR.CurDum = AN.IndDum = AM.IndDum;
00468 #endif
00469     AM.mTraceDum = AM.IndDum + 2*WILDOFFSET;
00470
00471     sp = GetSetupPar((UBYTE *) "parentheses");
00472     AM.MaxParLevel = sp->value+1;
00473     AC.tokenarglevel = (WORD *)Malloc1((sp->value+1)*sizeof(WORD), (char *) (sp->parameter));
00474 /*
00475     Space during calculations
00476 */
00477     sp = GetSetupPar((UBYTE *) "maxnumbersize");
00478 /*
00479     size = ( sp->value + 11 ) & (-4);
00480     AM.MaxTal = size - 2;
00481     if ( AM.MaxTal > (AM.MaxTer/sizeof(WORD)-2)/2 )
00482         AM.MaxTal = (AM.MaxTer/sizeof(WORD)-2)/2;
00483     if ( AM.MaxTal < (AM.MaxTer/sizeof(WORD)-2)/4 )
00484         AM.MaxTal = (AM.MaxTer/sizeof(WORD)-2)/4;
00485 */
00486 /*
00487     There is too much confusion about MaxTal cq maxnumbersize.
00488     It seems better to fix it at its maximum value. This way we only worry
00489     about maxtermsize. This can be understood better by the 'innocent' user.
00490 */
00491     if ( sp->value == 0 ) {
00492         AM.MaxTal = (AM.MaxTer/sizeof(WORD)-2)/2;
00493     }
00494     else {
00495         size = ( sp->value + 11 ) & (-4);
00496         AM.MaxTal = size - 2;
00497         if ( (size_t)AM.MaxTal > (size_t)((AM.MaxTer/sizeof(WORD)-2)/2) )
00498             AM.MaxTal = (AM.MaxTer/sizeof(WORD)-2)/2;
00499     }
00500     AM.MaxTal &= -sizeof(WORD)*2;
00501
00502     sp->value = AM.MaxTal;
00503     AC.cmod = (UWORD *)Malloc1(AM.MaxTal*4*sizeof(UWORD), (char *) (sp->parameter));
00504     AM.gcmmod = AC.cmod + AM.MaxTal;
00505     AC.powmod = AM.gcmmod + AM.MaxTal;
00506     AM.gpowmod = AC.powmod + AM.MaxTal;
00507 /*
00508     The IO buffers for the input and output expressions.
00509     Fscr[2] will be assigned in a later stage for hiding expressions from
00510     the regular action. That will make the program faster.
00511 */
00512     sp = GetSetupPar((UBYTE *) "scratchsize");
00513     AM.ScratSize = sp->value/sizeof(WORD);
00514     if ( AM.ScratSize < 4*AM.MaxTer ) AM.ScratSize = 4*AM.MaxTer;
00515     AM.HideSize = AM.ScratSize;
00516     sp = GetSetupPar((UBYTE *) "hidesize");
00517     if ( sp->value > 0 ) {
00518         AM.HideSize = sp->value/sizeof(WORD);
00519         if ( AM.HideSize < 4*AM.MaxTer ) AM.HideSize = 4*AM.MaxTer;
00520     }
00521     sp = GetSetupPar((UBYTE *) "factorizationcache");
00522     AM.fbuffersize = sp->value;
00523 #ifndef WITHPTHREADS
00524     sp = GetSetupPar((UBYTE *) "threadscratchsize");
00525     AM.ThreadScratSize = sp->value/sizeof(WORD);
00526     sp = GetSetupPar((UBYTE *) "threadscratchoutsize");
00527     AM.ThreadScratOutSize = sp->value/sizeof(WORD);
00528 #endif
00529 #ifndef WITHPTHREADS
00530     for ( j = 0; j < 2; j++ ) {
00531         WORD *ScratchBuf;
00532         ScratchBuf = (WORD *)Malloc1(AM.ScratSize*sizeof(WORD), "scratchsize");
00533         AR.Fscr[j].POsize = AM.ScratSize * sizeof(WORD);
00534         AR.Fscr[j].POfull = AR.Fscr[j].POfill = AR.Fscr[j].PObuffer = ScratchBuf;
00535         AR.Fscr[j].POstop = AR.Fscr[j].PObuffer + AM.ScratSize;
00536         PUTZERO(AR.Fscr[j].POposition);
00537     }
00538     AR.Fscr[2].PObuffer = 0;
00539 #endif
00540     sp = GetSetupPar((UBYTE *) "threadbucketsize");
00541     AC.ThreadBucketSize = AM.gThreadBucketSize = AM.ggThreadBucketSize = sp->value;
00542     sp = GetSetupPar((UBYTE *) "threadloadbalancing");
00543     AC.ThreadBalancing = AM.gThreadBalancing = AM.ggThreadBalancing = sp->value;
00544     sp = GetSetupPar((UBYTE *) "threadsortfilesynch");
00545     AC.ThreadSortFileSynch = AM.gThreadSortFileSynch = AM.ggThreadSortFileSynch = sp->value;
00546 /*

```

```

00547     The size for shared memory window for onside MPI2 communications
00548 */
00549     sp = GetSetupPar((UBYTE *)"shmwinSize");
00550     AM.shmWinSize = sp->value/sizeof(WORD);
00551     if ( AM.shmWinSize < 4*AM.MaxTer ) AM.shmWinSize = 4*AM.MaxTer;
00552 /*
00553     The sort buffer
00554 */
00555     sp = GetSetupPar((UBYTE *)"smallSize");
00556     SmallSize = sp->value;
00557     sp = GetSetupPar((UBYTE *)"smallestextension");
00558     SmallEsize = sp->value;
00559     sp = GetSetupPar((UBYTE *)"largesize");
00560     LargeSize = sp->value;
00561     sp = GetSetupPar((UBYTE *)"termsinsmall");
00562     TermsInSmall = sp->value;
00563     sp = GetSetupPar((UBYTE *)"largepatches");
00564     MaxPatches = sp->value;
00565     sp = GetSetupPar((UBYTE *)"filepatches");
00566     MaxFpatches = sp->value;
00567     sp = GetSetupPar((UBYTE *)"sortiosize");
00568     IOsize = sp->value;
00569     if ( IOsize < AM.MaxTer ) { IOsize = AM.MaxTer; sp->value = IOsize; }
00570 #ifndef WITHPTHREADS
00571 #ifdef WITHZLIB
00572     for ( j = 0; j < 2; j++ ) { AR.Fscr[j].ziosize = IOsize; }
00573 #endif
00574 #endif
00575     AM.S0 = 0;
00576     AM.S0 = AllocSort(LargeSize,SmallSize,SmallEsize,TermsInSmall
00577                     ,MaxPatches,MaxFpatches,IOsize,0);
00578     /* AM.S0->file.ziosize was already set to a (larger) value by AllocSort, here it is re-set. */
00579 #ifdef WITHZLIB
00580     AM.S0->file.ziosize = IOsize;
00581 #ifndef WITHPTHREADS
00582     AR.FoStage4[0].ziosize = IOsize;
00583     AR.FoStage4[1].ziosize = IOsize;
00584     AT.S0 = AM.S0;
00585 #endif
00586 #else
00587 #ifndef WITHPTHREADS
00588     AT.S0 = AM.S0;
00589 #endif
00590 #endif
00591 #ifndef WITHPTHREADS
00592     AR.FoStage4[0].POsize = ((IOsize+sizeof(WORD)-1)/sizeof(WORD))*sizeof(WORD);
00593     AR.FoStage4[1].POsize = ((IOsize+sizeof(WORD)-1)/sizeof(WORD))*sizeof(WORD);
00594 #endif
00595     sp = GetSetupPar((UBYTE *)"subsmallSize");
00596     AM.SSmallSize = sp->value;
00597     sp = GetSetupPar((UBYTE *)"subsmallestextension");
00598     AM.SSmallEsize = sp->value;
00599     sp = GetSetupPar((UBYTE *)"sublargesize");
00600     AM.SLargeSize = sp->value;
00601     sp = GetSetupPar((UBYTE *)"subtermsinsmall");
00602     AM.STermsInSmall = sp->value;
00603     sp = GetSetupPar((UBYTE *)"sublargepatches");
00604     AM.SMaxPatches = sp->value;
00605     sp = GetSetupPar((UBYTE *)"subfilepatches");
00606     AM.SMaxFpatches = sp->value;
00607     sp = GetSetupPar((UBYTE *)"subsortiosize");
00608     AM.SIOsize = sp->value;
00609     /* As for IOsize, make sure SIOsize is at least as large as AM.MaxTer. */
00610     if ( AM.SIOsize < AM.MaxTer ) { AM.SIOsize = AM.MaxTer; sp->value = AM.SIOsize; }
00611     sp = GetSetupPar((UBYTE *)"spectatorsize");
00612     AM.SpectatorSize = sp->value;
00613 /*
00614     The next code is just for the moment (26-jan-1997) because we have
00615     the new parts combined with the old. Once the old parts are gone
00616     from the program, we can eliminate this code too.
00617 */
00618     sp = GetSetupPar((UBYTE *)"functionlevels");
00619     AM.maxFlevels = sp->value + 1;
00620 #ifdef WITHPTHREADS
00621 #else
00622     AT.Nest = (NESTING) Malloc1((LONG)sizeof(struct NeStInG)*AM.maxFlevels,"functionlevels");
00623     AT.NestStop = AT.Nest + AM.maxFlevels;
00624     AT.NestPoin = AT.Nest;
00625 #endif
00626
00627     sp = GetSetupPar((UBYTE *)"maxwildcards");
00628     AM.MaxWildcards = sp->value;
00629 #ifdef WITHPTHREADS
00630 #else
00631     AT.WildMask = (WORD *) Malloc1((LONG)AM.MaxWildcards*sizeof(WORD),"maxwildcards");
00632 #endif
00633

```

```

00634     sp = GetSetupPar((UBYTE *)"compresssize");
00635     if ( sp->value < 2*AM.MaxTer ) sp->value = 2*AM.MaxTer;
00636     AM.CompressSize = sp->value;
00637 #ifndef WITHPTHREADS
00638     AR.CompressBuffer = (WORD *)Malloc1((AM.CompressSize+10)*sizeof(WORD), "compresssize");
00639     AR.CompressPointer = AR.CompressBuffer;
00640     AR.ComprTop = AR.CompressBuffer + AM.CompressSize;
00641 #endif
00642     sp = GetSetupPar((UBYTE *)"bracketindexsize");
00643     if ( sp->value < 20*AM.MaxTer ) sp->value = 20*AM.MaxTer;
00644     AM.MaxBracketBufferSize = sp->value/sizeof(WORD);
00645
00646     sp = GetSetupPar((UBYTE *)"dotchar");
00647     AO.FortDotChar = ((UBYTE *) (sp->value))[0];
00648     sp = GetSetupPar((UBYTE *)"commentchar");
00649     AP.cComChar = AP.ComChar = ((UBYTE *) (sp->value))[0];
00650     sp = GetSetupPar((UBYTE *)"procedureextension");
00651 /*
00652     Check validity first.
00653 */
00654     s = (UBYTE *) (sp->value);
00655     if ( FG.cTable[*s] != 0 ) {
00656         MesPrint(" Illegal string for procedure extension %s", (UBYTE *)sp->value);
00657         error = -2;
00658     }
00659     else {
00660         s++;
00661         while ( *s ) {
00662             if ( *s == ' ' || *s == '\t' || *s == '\n' ) {
00663                 MesPrint(" Illegal string for procedure extension %s", (UBYTE *)sp->value);
00664                 error = -2;
00665                 break;
00666             }
00667             s++;
00668         }
00669     }
00670     AP.cprocedureExtension = strDup1((UBYTE *) (sp->value), "procedureExtension");
00671     AP.procedureExtension = strDup1(AP.cprocedureExtension, "procedureExtension");
00672
00673     sp = GetSetupPar((UBYTE *)"totalsize");
00674     if ( sp->value != 2 ) AM.PrintTotalSize = sp->value;
00675
00676     sp = GetSetupPar((UBYTE *)"continuationlines");
00677     AM.FortranCont = sp->value;
00678     sp = GetSetupPar((UBYTE *)"oldorder");
00679     AM.OldOrderFlag = sp->value;
00680     sp = GetSetupPar((UBYTE *)"resettimeonclear");
00681     AM.resetTimeOnClear = sp->value;
00682     sp = GetSetupPar((UBYTE *)"nospacesinnumbers");
00683     AO.NoSpacesInNumbers = AM.gNoSpacesInNumbers = AM.ggNoSpacesInNumbers = sp->value;
00684     sp = GetSetupPar((UBYTE *)"indentSpace");
00685     AO.IndentSpace = AM.gIndentSpace = AM.ggIndentSpace = sp->value;
00686     sp = GetSetupPar((UBYTE *)"jumpratio");
00687     AM.jumpratio = sp->value;
00688     sp = GetSetupPar((UBYTE *)"nwritestatistics");
00689     AC.StatsFlag = AM.gStatsFlag = AM.ggStatsFlag = 1-sp->value;
00690     sp = GetSetupPar((UBYTE *)"nwritefinalstatistics");
00691     AC.FinalStats = AM.gFinalStats = AM.ggFinalStats = 1-sp->value;
00692     sp = GetSetupPar((UBYTE *)"nwritethreadstatistics");
00693     AC.ThreadStats = AM.gThreadStats = AM.ggThreadStats = 1-sp->value;
00694     sp = GetSetupPar((UBYTE *)"nwriteprocessstatistics");
00695     AC.ProcessStats = AM.gProcessStats = AM.ggProcessStats = 1-sp->value;
00696     sp = GetSetupPar((UBYTE *)"oldparallelstatistics");
00697     AC.OldParallelStats = AM.gOldParallelStats = AM.ggOldParallelStats = sp->value;
00698     sp = GetSetupPar((UBYTE *)"oldfactarg");
00699     AC.OldFactArgFlag = AM.gOldFactArgFlag = AM.ggOldFactArgFlag = sp->value;
00700     sp = GetSetupPar((UBYTE *)"oldgcd");
00701     AC.OldGCDflag = AM.gOldGCDflag = AM.ggOldGCDflag = sp->value;
00702     sp = GetSetupPar((UBYTE *)"wtimestats");
00703     if ( sp->value == 2 ) sp->value = AM.ggWTimeStatsFlag;
00704     AC.WTimeStatsFlag = AM.gWTimeStatsFlag = AM.ggWTimeStatsFlag = sp->value;
00705 #ifdef WITHFLOAT
00706     sp = GetSetupPar((UBYTE *)"maxweight");
00707     AC.MaxWeight = AM.gMaxWeight = AM.ggMaxWeight = sp->value;
00708     sp = GetSetupPar((UBYTE *)"defaultprecision");
00709     AC.DefaultPrecision = AM.gDefaultPrecision = AM.ggDefaultPrecision = sp->value;
00710 #endif
00711     sp = GetSetupPar((UBYTE *)"sorttype");
00712     if ( StrICmp((UBYTE *)"lowfirst", (UBYTE *)sp->value) == 0 ) {
00713         AC.lSortType = SORTLOWFIRST;
00714     }
00715     else if ( StrICmp((UBYTE *)"highfirst", (UBYTE *)sp->value) == 0 ) {
00716         AC.lSortType = SORTHIGHFIRST;
00717     }
00718     else {
00719         MesPrint(" Illegal SortType specification: %s", (UBYTE *)sp->value);
00720         error = -2;

```

```

00721     }
00722
00723     sp = GetSetupPar((UBYTE *)"processbucketsize");
00724     AM.hProcessBucketSize = AM.gProcessBucketSize =
00725     AC.ProcessBucketSize = AC.mProcessBucketSize = sp->value;
00726 /*
00727     The store caches (code installed 15-aug-2006 JV)
00728 */
00729     sp = GetSetupPar((UBYTE *)"numstorecaches");
00730     AM.NumStoreCaches = sp->value;
00731     sp = GetSetupPar((UBYTE *)"sizestorecache");
00732     AM.SizeStoreCache = sp->value;
00733     /* Make sure this is a multiple of sizeof(WORD). */
00734     AM.SizeStoreCache = ((AM.SizeStoreCache+sizeof(WORD)-1)/sizeof(WORD))*sizeof(WORD);
00735 #ifndef WITHPTHREADS
00736 /*
00737     Install the store caches (15-aug-2006 JV)
00738     Note that in the case of PTHREADS this is done in InitializeOneThread
00739 */
00740     AT.StoreCache = AT.StoreCacheAlloc = 0;
00741     if ( AM.NumStoreCaches > 0 ) {
00742         STORECACHE sa, sb;
00743         size = sizeof(struct StOrEcAcHe)+AM.SizeStoreCache;
00744         size = ((size-1)/sizeof(size_t)+1)*sizeof(size_t);
00745         AT.StoreCacheAlloc = (STORECACHE)Mallc1(size*AM.NumStoreCaches,"StoreCaches");
00746         AT.StoreCache = AT.StoreCacheAlloc;
00747         sa = AT.StoreCache;
00748         for ( j = 0; j < AM.NumStoreCaches; j++ ) {
00749             sb = (STORECACHE)(void *)((UBYTE *)sa+size);
00750             if ( j == AM.NumStoreCaches-1 ) {
00751                 sa->next = 0;
00752             }
00753             else {
00754                 sa->next = sb;
00755             }
00756             SETBASEPOSITION(sa->position,-1);
00757             SETBASEPOSITION(sa->toppos,-1);
00758             sa = sb;
00759         }
00760     }
00761 #endif
00762
00763 /*
00764     And now some order sensitive things
00765 */
00766     if ( AM.Path == 0 ) {
00767         sp = GetSetupPar((UBYTE *)"path");
00768         AM.Path = strDup1((UBYTE *) (sp->value), "path");
00769     }
00770     if ( AM.IncDir == 0 ) {
00771         sp = GetSetupPar((UBYTE *)"incdir");
00772         AM.IncDir = strDup1((UBYTE *) (sp->value), "incdir");
00773     }
00774 /*
00775     if ( AM.TempDir == 0 ) {
00776         sp = GetSetupPar((UBYTE *)"tempdir");
00777         AM.TempDir = strDup1((UBYTE *) (sp->value), "tempdir");
00778     }
00779 */
00780     return(error);
00781 }
00782
00783 /*
00784     #] AllocSetups :
00785     #[ WriteSetup :
00786
00787     The routine writes the values of the setup parameters.
00788     We should do this better. (JV, 21-may-2008)
00789     The way it should be done is:
00790         a: write the raw values.
00791         b: give readjusted values.
00792         c: give derived values.
00793     Because this is a difficult subject, it would be nice to have a LaTeX
00794     document that explains this all exactly. There should then be a
00795     mechanism to poke the values of the setup into the LaTeX document.
00796     probably the easiest way is to make a file with lots of \def definitions
00797     and have that included into the LaTeX file.
00798 */
00799
00800 void WriteSetup(void)
00801 {
00802     int n = sizeof(setupparameters)/sizeof(SETUPPARAMETERS);
00803     SETUPPARAMETERS *sp;
00804     MesPrint(" The setup parameters are:");
00805     for ( sp = setupparameters; n > 0; n--, sp++ ) {
00806         switch(sp->type){
00807             case NUMERICALVALUE:

```

```

00808         MesPrint("    %s: %l", sp->parameter, sp->value);
00809         break;
00810     case PATHVALUE:
00811         if ( StrICmp(sp->parameter, (UBYTE *) "path") == 0 && AM.Path ) {
00812             MesPrint("    %s: '%s'", sp->parameter, (UBYTE *) (AM.Path));
00813             break;
00814         }
00815         if ( StrICmp(sp->parameter, (UBYTE *) "incdir") == 0 && AM.IncDir ) {
00816             MesPrint("    %s: '%s'", sp->parameter, (UBYTE *) (AM.IncDir));
00817             break;
00818         }
00819         /* fall through */
00820     case STRINGVALUE:
00821         if ( StrICmp(sp->parameter, (UBYTE *) "tempdir") == 0 && AM.TempDir ) {
00822             MesPrint("    %s: '%s'", sp->parameter, (UBYTE *) (AM.TempDir));
00823         }
00824         else if ( StrICmp(sp->parameter, (UBYTE *) "tempsortdir") == 0 && AM.TempSortDir ) {
00825             MesPrint("    %s: '%s'", sp->parameter, (UBYTE *) (AM.TempSortDir));
00826         }
00827         else {
00828             MesPrint("    %s: '%s'", sp->parameter, (UBYTE *) (sp->value));
00829         }
00830         break;
00831     case ONOFFVALUE:
00832         if ( sp->value == 0 )
00833             MesPrint("    %s: OFF", sp->parameter);
00834         else if ( sp->value == 1 )
00835             MesPrint("    %s: ON", sp->parameter);
00836         break;
00837     case DEFINEVALUE:
00838         /*
00839             MesPrint("    %s: '%s'", sp->parameter, (UBYTE *) (sp->value));
00840         */
00841         break;
00842     }
00843 }
00844 AC.SetupFlag = 0;
00845 }
00846
00847 /*
00848     #] WriteSetup :
00849     #[ AllocSort :
00850
00851     Routine allocates a complete struct for sorting.
00852     To be used for the main allocation of the sort buffers, and
00853     in a later stage for the function and subroutine sort buffers.
00854     The level arg denotes a main buffer allocation (0) or a sub-buffer
00855     allocation (1), used only for printing warning messages for buffer
00856     size adjustments in DEBUGGING mode.
00857 */
00858 SORTING *AllocSort(LONG inLargeSize, LONG inSmallSize, LONG inSmallEsize, LONG inTermsInSmall,
00859     int inMaxPatches, int inMaxFpatches, LONG inIOsize, int level)
00860 {
00861     DUMMYUSE(level); /* This is only used in DEBUGGING mode */
00862     LONG LargeSize = inLargeSize;
00863     LONG SmallSize = inSmallSize;
00864     LONG SmallEsize = inSmallEsize;
00865     LONG TermsInSmall = inTermsInSmall;
00866     int MaxPatches = inMaxPatches;
00867     int MaxFpatches = inMaxFpatches;
00868     LONG IOsize = inIOsize;
00869
00870     LONG longer, terms2insmall, sortsize, longerp;
00871     LONG IObuffersize = IOsize;
00872     LONG IOTry;
00873     SORTING *sort;
00874     int fname2Size = 0, j = 0;
00875     char *s;
00876     if ( AM.S0 != 0 ) {
00877         s = FG.fname2; fname2Size = 0;
00878         while ( *s ) { s++; fname2Size++; }
00879         fname2Size += 16;
00880     }
00881     if ( MaxFpatches < 4 ) MaxFpatches = 4;
00882     longer = MaxPatches > MaxFpatches ? MaxPatches : MaxFpatches;
00883     longerp = longer;
00884     while ( (1 < j) < longerp ) j++;
00885     longerp = (1 < j) + 1;
00886     longerp += sizeof(WORD*) - (longerp*sizeof(WORD*));
00887     longer++;
00888     longer += sizeof(WORD*) - (longer*sizeof(WORD*));
00889     if ( SmallSize < 16*AM.MaxTer ) SmallSize = 16*AM.MaxTer+16;
00890     TermsInSmall = (TermsInSmall+15) & (-16L);
00891     terms2insmall = 2*TermsInSmall; /* Used to be just + 100 rather than *2 */
00892     if ( SmallEsize < (SmallSize*3)/2 ) SmallEsize = (SmallSize*3)/2;
00893     if ( LargeSize > 0 && LargeSize < 2*SmallSize ) LargeSize = 2*SmallSize;
00894     SmallEsize = (SmallEsize+15) & (-16L);

```

```

00895     if ( LargeSize < 0 ) LargeSize = 0;
00896     sortsize = sizeof(SORTING);
00897     sortsize = (sortsize+15)&(-16L);
00898     IObuffersize = (IObuffersize+sizeof(WORD)-1)/sizeof(WORD);
00899 /*
00900     The next statement fixes a bug. In the rare case that we have a
00901     problem here, we expand the size of the large buffer or the
00902     small extension
00903 */
00904     if ( (ULONG)( LargeSize+SmallEsize ) < MaxFpatches*((IObuffersize
00905     +COMPINC)*sizeof(WORD)+2*AM.MaxTer) ) {
00906         if ( LargeSize == 0 )
00907             SmallEsize = MaxFpatches*((IObuffersize+COMPINC)*sizeof(WORD)+2*AM.MaxTer);
00908         else
00909             LargeSize = MaxFpatches*((IObuffersize+COMPINC)*sizeof(WORD)+2*AM.MaxTer)
00910                 - SmallEsize;
00911     }
00912     IOtry = ((LargeSize+SmallEsize)/MaxFpatches-2*AM.MaxTer)/sizeof(WORD)-COMPINC;
00913
00914     /* Here both IObuffersize and IOtry are in units of sizeof(WORD). */
00915     if ( IObuffersize < IOtry ) {
00916         IObuffersize = IOtry;
00917     }
00918
00919 #if DEBUGGING
00920     char *prefix;
00921     if ( level == 0 ) { prefix = ""; }
00922     else { prefix = "Sub"; }
00923     if ( LargeSize != inLargeSize ) { MesPrint("Warning: %sLargeSize adjusted: %l -> %l", prefix,
00924     inLargeSize, LargeSize); }
00925     if ( SmallSize != inSmallSize ) { MesPrint("Warning: %sSmallSize adjusted: %l -> %l", prefix,
00926     inSmallSize, SmallSize); }
00927     if ( SmallEsize != inSmallEsize ) {MesPrint("Warning: %sSmallEsize adjusted: %l -> %l", prefix,
00928     inSmallEsize, SmallEsize); }
00929     if ( TermsInSmall != inTermsInSmall ) { MesPrint("Warning: %sTermsInSmall adjusted: %l -> %l",
00930     prefix, inTermsInSmall, TermsInSmall); }
00931     if ( MaxPatches != inMaxPatches ) { MesPrint("Warning: MaxPatches adjusted: %d -> %d",
00932     inMaxPatches, MaxPatches); }
00933     if ( MaxFpatches != inMaxFpatches ) {MesPrint("Warning: MaxFPatches adjusted: %d -> %d",
00934     inMaxFpatches, MaxFpatches); }
00935     /* This one is always changed if the LargeSize has not been... */
00936     /* if ( IObuffersize != inIOsize/(LONG)sizeof(WORD) ) { MesPrint("Warning: IOsize adjusted: %l ->
00937     %l", inIOsize/sizeof(WORD), IObuffersize); } */
00938 #endif
00939
00940     /* Allocate separate buffers for most struct members, for better testing and debugging with
00941     valgrind. */
00942     sort = Malloc1(sizeof(*sort), "AllocSort: sorting struct");
00943
00944     sort->LargeSize = LargeSize/sizeof(WORD);
00945     sort->SmallSize = SmallSize/sizeof(WORD);
00946     sort->SmallEsize = SmallEsize/sizeof(WORD);
00947     sort->MaxPatches = MaxPatches;
00948     sort->MaxFpatches = MaxFpatches;
00949     sort->TermsInSmall = TermsInSmall;
00950     sort->Terms2InSmall = terms2inssmall;
00951
00952     sort->sPointer = Malloc1(sizeof(*sort->sPointer ))*terms2inssmall, "AllocSort: sPointer");
00953     sort->Patches = Malloc1(sizeof(*sort->Patches ))*longer, "AllocSort: Patches");
00954     sort->pStop = Malloc1(sizeof(*sort->pStop ))*longer, "AllocSort: pStop");
00955     sort->poina = Malloc1(sizeof(*sort->poina ))*longerp, "AllocSort: poina");
00956     sort->poin2a = Malloc1(sizeof(*sort->poin2a ))*longerp, "AllocSort: poin2a");
00957
00958     sort->fPatches = Malloc1(sizeof(*sort->fPatches ))*longer, "AllocSort: fPatches");
00959     sort->fPatchesStop = Malloc1(sizeof(*sort->fPatchesStop))*longer, "AllocSort: fPatchesStop");
00960     sort->inPatches = Malloc1(sizeof(*sort->inPatches ))*longer, "AllocSort: inPatches");
00961     sort->tree = Malloc1(sizeof(*sort->tree ))*longerp, "AllocSort: tree");
00962     sort->used = Malloc1(sizeof(*sort->used ))*longerp, "AllocSort: used");
00963
00964 #ifdef WITHZLIB
00965     sort->fpcompressed = Malloc1(sizeof(*sort->fpcompressed ))*(longerp+2), "AllocSort:
00966     fpcompressed");
00967     sort->fpincompressed = Malloc1(sizeof(*sort->fpincompressed))*(longerp+2), "AllocSort:
00968     fpincompressed");
00969     sort->zsparray = 0;
00970 #endif
00971
00972     sort->ktoi = Malloc1(sizeof(*sort->ktoi))*(longerp+2), "AllocSort: ktoi");
00973
00974     // The combined Large buffer and Small buffer (+ extension) are used.
00975     // They must be allocated together.
00976     sort->lBuffer = Malloc1(sizeof(*sort->lBuffer))*(sort->LargeSize+sort->SmallEsize),
00977     "AllocSort: lBuffer+sBuffer");
00978     sort->lTop = sort->lBuffer+sort->LargeSize;
00979
00980     sort->sBuffer = sort->lTop;

```

```

00971     if ( sort->LargeSize == 0 ) { sort->lBuffer = 0; sort->lTop = 0; }
00972     sort->sTop = sort->sBuffer + sort->SmallSize;
00973     sort->sTop2 = sort->sBuffer + sort->SmallEsize;
00974     sort->sHalf = sort->sBuffer + (LONG)((sort->SmallSize+sort->SmallEsize)»1);
00975
00976     sort->file.PObuffer = Malloc1(IObuffersize*sizeof(*(sort->file.PObuffer))+fname2Size+16,
"AllocSort: PObuffer");
00977     sort->file.POstop = sort->file.PObuffer+IObuffersize;
00978     sort->file.POsize = IObuffersize * sizeof(WORD);
00979     sort->file.POfill = sort->file.POfull = sort->file.PObuffer;
00980     sort->file.active = 0;
00981     sort->file.handle = -1;
00982     PUTZERO(sort->file.POposition);
00983 #ifdef WITHPTHREADS
00984     sort->file.pthreadslck = dummylock;
00985 #endif
00986 #ifdef WITHZLIB
00987     sort->file.ziosize = IObuffersize*sizeof(WORD);
00988     sort->file.ziobuffer = 0;
00989 #endif
00990     if ( AM.S0 != 0 ) {
00991         sort->file.name = (char *) (sort->file.PObuffer + IObuffersize);
00992         AllocSortFileName(sort);
00993     }
00994     else sort->file.name = 0;
00995     sort->cBuffer = 0;
00996     sort->cBufferSize = 0;
00997     sort->f = 0;
00998     sort->PolyWise = 0;
00999
01000     return(sort);
01001 }
01002
01003 /*
01004     #] AllocSort :
01005     #[ AllocSortFileName :
01006 */
01007
01008 void AllocSortFileName(SORTING *sort)
01009 {
01010     GETIDENTITY
01011     char *s, *t;
01012 /*
01013     This is not the allocation before the tempfiles are determined.
01014     Hence we can use the name in FG.fname2 and modify the tail
01015 */
01016     s = FG.fname2; t = sort->file.name;
01017     while ( *s ) *t++ = *s++;
01018 #ifdef WITHPTHREADS
01019     t[-2] = 'F';
01020     snprintf(t-1,FG.fname2size-(t-1-sort->file.name),"%d.%d",identity,AN.filenum);
01021 #else
01022     t[-2] = 'f';
01023     snprintf(t-1,FG.fname2size-(t-1-sort->file.name),"%d",AN.filenum);
01024 #endif
01025     AN.filenum++;
01026 }
01027
01028 /*
01029     #] AllocSortFileName :
01030     #[ AllocFileHandle :
01031 */
01032
01033 FILEHANDLE *AllocFileHandle(WORD par,char *name)
01034 {
01035     GETIDENTITY
01036     LONG allocation, Ssize;
01037     FILEHANDLE *fh;
01038     int i = 0;
01039     char *s, *t;
01040
01041     s = FG.fname2; i = 0;
01042     while ( *s ) { s++; i++; }
01043     if ( par == 0 ) { i += 16; Ssize = AM.SIOsize; }
01044     else { s = name; while ( *s ) { i++; s++; } i+= 2; Ssize = AM.SpectatorSize; }
01045
01046     allocation = sizeof(FILEHANDLE) + (Ssize+1)*sizeof(WORD) + i*sizeof(char)
01047         +FG.fname2size+20;
01048     fh = (FILEHANDLE *)Malloc1(allocation,"FileHandle");
01049
01050     fh->PObuffer = (WORD *) (fh+1);
01051     fh->POstop = fh->PObuffer+Ssize;
01052     fh->POsize = Ssize * sizeof(WORD);
01053     fh->active = 0;
01054     fh->handle = -1;
01055     PUTZERO(fh->POposition);
01056 #ifdef WITHPTHREADS

```

```

01057     fh->pthreadlock = dummylock;
01058 #endif
01059     if ( par == 0 ) { /* sort file */
01060         if ( AM.S0 != 0 ) {
01061             fh->name = (char *) (fh->PStop + 1);
01062             s = FG.fname2; t = fh->name;
01063             while ( *s ) *t++ = *s++;
01064 #ifdef WITHPTHREADS
01065             t[-2] = 'F';
01066             snprintf(t-1,FG.fname2size-(t-1-fh->name),"%d-%d",identity,AN.filenum);
01067 #else
01068             t[-2] = 'f';
01069             snprintf(t-1,FG.fname2size-(t-1-fh->name),"%d",AN.filenum);
01070 #endif
01071             AN.filenum++;
01072         }
01073         else fh->name = 0;
01074     }
01075     else { /* Spectator file */
01076         fh->name = (char *) (fh->PStop + 1);
01077         s = FG.fname; t = fh->name;
01078         for ( i = 0; i < FG.fnamebase; i++ ) *t++ = *s++;
01079         s = name;
01080         while ( *s ) *t++ = *s++;
01081         *t = 0;
01082     }
01083     fh->POfill = fh->POfull = fh->PObuffer;
01084     return(fh);
01085 }
01086
01087 /*
01088     #] AllocFileHandle :
01089     #[ DeAllocFileHandle :
01090
01091     Made to repair deallocation of AN.filenum. 21-sep-2000
01092 */
01093
01094 void DeAllocFileHandle(FILEHANDLE *fh)
01095 {
01096     GETIDENTITY
01097     if ( fh->handle >= 0 ) {
01098         CloseFile(fh->handle);
01099         fh->handle = -1;
01100         remove(fh->name);
01101     }
01102     AN.filenum--; /* free namespace. was forgotten in first reading */
01103     M_free(fh,"Temporary FileHandle");
01104 }
01105
01106 /*
01107     #] DeAllocFileHandle :
01108     #[ MakeSetupAllocs :
01109 */
01110
01111 int MakeSetupAllocs(void)
01112 {
01113     if ( RecalcSetups() || AllocSetups() ) return(1);
01114     else return(0);
01115 }
01116
01117 /*
01118     #] MakeSetupAllocs :
01119     #[ TryFileSetups :
01120
01121     Routine looks in the input file for a start of the type
01122     [#-]
01123     #: setupparameter value
01124     It keeps looking until the first line that does not start with
01125     #-, #+ or #:
01126     Then it rewinds the input.
01127 */
01128
01129 #define SETBUFSIZE 257
01130
01131 int TryFileSetups(void)
01132 {
01133     LONG oldstreamposition;
01134     int oldstream;
01135     int error = 0, eqnum;
01136     int oldNoShowInput = AC.NoShowInput;
01137     UBYTE buff[SETBUFSIZE+1], *s, *t, *u, *settop, c;
01138     LONG linenum, prevline;
01139
01140     if ( AC.CurrentStream == 0 ) return(error);
01141     oldstream = AC.CurrentStream - AC.Streams;
01142     oldstreamposition = GetStreamPosition(AC.CurrentStream);
01143     linenum = AC.CurrentStream->linenumber;

```



```

01144     prevline = AC.CurrentStream->prevline;
01145     eqnum = AC.CurrentStream->eqnum;
01146     AC.NoShowInput = 1;
01147     settop = buff + SETBUFSIZE;
01148     if ( AC.CurrentStream->type == INPUTSTREAM && oldstreamposition == 0 )
AC.CurrentStream->fileposition = 0;
01149     for(;;) {
01150         c = GetInput();
01151         if ( c == '*' || c == '\n' ) {
01152             while ( c != '\n' && c != ENDOFINPUT ) c = GetInput();
01153             if ( c == ENDOFINPUT ) goto eoi;
01154             continue;
01155         }
01156         if ( c == ENDOFINPUT ) goto eoi;
01157         if ( c != '#' ) break;
01158         c = GetInput();
01159         if ( c == ENDOFINPUT ) goto eoi;
01160         if ( c != '-' && c != '+' && c != ':' ) break;
01161         if ( c != ':' ) {
01162             while ( c != '\n' && c != ENDOFINPUT ) c = GetInput();
01163             continue;
01164         }
01165         s = buff;
01166         while ( ( c = GetInput() ) == ' ' || c == '\t' || c == '\r' ) {}
01167         if ( c == ENDOFINPUT ) break;
01168         if ( c == LINEFEED ) continue;
01169         if ( c == 0 || c == ENDOFINPUT ) break;
01170         while ( c != LINEFEED && c != ENDOFINPUT ) {
01171             *s++ = c;
01172             c = GetInput();
01173             if ( c != LINEFEED && c != '\r' ) continue;
01174             if ( s >= settop ) {
01175                 while ( c != '\n' && c != ENDOFINPUT ) c = GetInput();
01176                 MesPrint("Setups in .frm file: Line too long. setup ignored");
01177                 error++; goto nextline;
01178             }
01179         }
01180         *s++ = '\n';
01181         t = s = buff; /* name of the option */
01182         while ( tolower(*s) >= 'a' && tolower(*s) <= 'z' ) s++;
01183         if ( *s != '\n' ) {
01184             *s++ = 0;
01185             while ( *s == ' ' || *s == '\t' ) s++;
01186             u = s; /* 'value' of the option */
01187             while ( *s && *s != '\n' && *s != '\r' ) s++;
01188             if ( *s ) *s++ = 0;
01189         }
01190         else {
01191             /* The value is empty. */
01192             u = s;
01193             *s++ = 0;
01194         }
01195         error += ProcessOption(t,u,1);
01196     nextline:;
01197     }
01198     AC.NoShowInput = oldNoShowInput;
01199     AC.CurrentStream = AC.Streams + oldstream;
01200     PositionStream(AC.CurrentStream,oldstreamposition);
01201     AC.CurrentStream->linenumber = linenum;
01202     AC.CurrentStream->prevline = prevline;
01203     AC.CurrentStream->eqnum = eqnum;
01204     ClearPushback();
01205     if ( AC.CurrentStream->type == INPUTSTREAM ) AC.CurrentStream->fileposition = -1;
01206     return(error);
01207 eoi:
01208     MesPrint("Input file without a program.");
01209     return(-1);
01210 }
01211
01212 /*
01213     #] TryFileSetups :
01214     #[ TryEnvironment :
01215 */
01216
01217 int TryEnvironment(void)
01218 {
01219     char *s, *t, *u, varname[100];
01220     int i,imax = sizeof(setupparameters)/sizeof(SETUPPARAMETERS);
01221     int error = 0;
01222     varname[0] = 'F'; varname[1] = 'O'; varname[2] = 'R'; varname[3] = 'M';
01223     varname[4] = '_'; varname[5] = 0;
01224     for ( i = 0; i < imax; i++ ) {
01225         t = s = (char *) (setupparameters[i].parameter);
01226         u = varname+5;
01227         while ( *s ) { *u++ = (char) (toupper((unsigned char)*s)); s++; }
01228         *u = 0;
01229         s = (char *) (getenv(varname));

```

```


01230         if ( s ) {
01231             error += ProcessOption((UBYTE *)t, (UBYTE *)s, 2);
01232         }
01233     }
01234     return(error);
01235 }
01236
01237 /*
01238     #] TryEnvironment :
01239     #] Setups :
01240 */

```

4.129 smart.c File Reference

```
#include "form3.h"
```

Include dependency graph for smart.c:

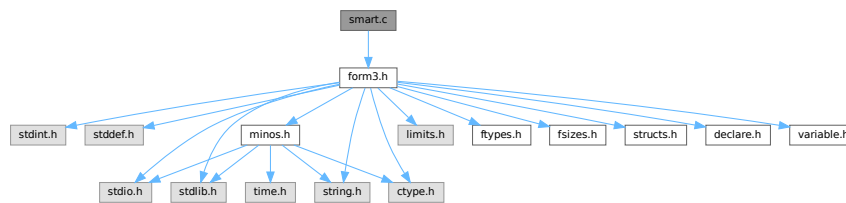

Functions

- int [StudyPattern](#) (WORD *lhs)
- int [MatchIsPossible](#) (WORD *pattern, WORD *term)

4.129.1 Detailed Description

The functions for smart pattern searches in combinations of functions. When many wildcards are involved and the functions are (anti)symmetric an exhaustive search for all possibilities may take very much time (like factorial in the number of wildcards) while a human can often see immediately that there cannot be a match. The routines here try to make FORM a bit smarter in this respect.

This is just the beginning. It still needs lots of work!

Definition in file [smart.c](#).

4.129.2 Function Documentation

4.129.2.1 StudyPattern()

```

int StudyPattern (
    WORD * lhs )

```

Definition at line 62 of file [smart.c](#).

4.129.2.2 MatchIsPossible()

```
int MatchIsPossible (
    WORD * pattern,
    WORD * term )
```

Definition at line 299 of file [smart.c](#).

4.130 smart.c

[Go to the documentation of this file.](#)

```
00001
00012 /* #[] License : */
00013 /*
00014 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00015 *   When using this file you are requested to refer to the publication
00016 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00017 *   This is considered a matter of courtesy as the development was paid
00018 *   for by FOM the Dutch physics granting agency and we would like to
00019 *   be able to track its scientific use to convince FOM of its value
00020 *   for the community.
00021 *
00022 *   This file is part of FORM.
00023 *
00024 *   FORM is free software: you can redistribute it and/or modify it under the
00025 *   terms of the GNU General Public License as published by the Free Software
00026 *   Foundation, either version 3 of the License, or (at your option) any later
00027 *   version.
00028 *
00029 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00030 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00031 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00032 *   details.
00033 *
00034 *   You should have received a copy of the GNU General Public License along
00035 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00036 */
00037 /* #[] License : */
00038 /*
00039    #[] Includes : function.c
00040 */
00041
00042 #include "form3.h"
00043
00044 /*
00045    #[] Includes :
00046    #[] StudyPattern :
00047
00048    Argument is a complete lhs of an id-statement
00049    Its last word is a zero (new convention(18-may-1997)) to indicate
00050    that no extra information is following. We can add there information
00051    about the pattern that will help during the actual pattern matching.
00052    Currently the WorkPointer points to just after this lhs.
00053
00054    Task of this routine: To study the functions, their symmetry properties
00055    and their wildcards to determine in which order the functions can
00056    be matched best. If the order should be different we can change it here.
00057
00058    Problem encountered 22-dec-2008 (JV): we don't take noncommuting
00059    functions into account.
00060 */
00061
00062 int StudyPattern(WORD *lhs)
00063 {
00064     GETIDENTITY
00065     WORD *fullproto, *pat, *p, *p1, *p2, *pstop, *info, f, nn;
00066     int numfun = 0, numsym = 0, allwilds = 0, i, j, k, nc;
00067     FUN_INFO *finf, *fmin, *fl, *f2, funscratch;
00068
00069     fullproto = lhs + IDHEAD;
00070     /* if ( *lhs == TYPEIF ) fullproto--; */
00071     pat = fullproto + fullproto[1];
00072     info = pat + *pat;
00073
00074     p = pat + 1;
00075     while ( p < info ) {
00076         if ( *p >= FUNCTION ) {
```

```

00077         numfun++;
00078         nn = *p - FUNCTION;
00079         if ( nn >= WILDOFFSET ) nn -= WILDOFFSET;
00080 /*
00081         We check here for cases that are not allowed like ?a inside
00082         symmetric functions or tensors.
00083 */
00084         if ( ( functions[nn].symmetric == SYMMETRIC ) ||
00085             ( functions[nn].symmetric == ANTISYMMETRIC ) ) {
00086             p2 = p+p[1]; p1 = p+FUNHEAD;
00087             if ( functions[nn].spec > 0 ) {
00088                 while ( p1 < p2 ) {
00089                     if ( *p1 == FUNNYWILD ) {
00090                         MesPrint("&Argument field wildcards are not allowed inside (anti)symmetric
functions or tensors");
00091                         return(1);
00092                     }
00093                     p1++;
00094                 }
00095             }
00096             else {
00097                 while ( p1 < p2 ) {
00098                     if ( *p1 == -ARGWILD ) {
00099                         MesPrint("&Argument field wildcards are not allowed inside (anti)symmetric
functions or tensors");
00100                         return(1);
00101                     }
00102                     NEXTARG(p1);
00103                 }
00104             }
00105         }
00106     }
00107     p += p[1];
00108 }
00109 if ( numfun == 0 ) return(0);
00110 if ( ( lhs[2] & SUBMASK ) == SUBALL ) {
00111     p = pat + 1;
00112     while ( p < info ) {
00113         if ( *p == SYMBOL || *p == VECTOR || *p == DOTPRODUCT || *p == INDEX ) {
00114             MesPrint("&id,all can have only functions and/or tensors in the lhs.");
00115             return(1);
00116         }
00117         p += p[1];
00118     }
00119 }
00120 /*
00121     We need now some room for the information about the functions
00122 */
00123 if ( numfun > AN.numfuninfo ) {
00124     if ( AN.FunInfo ) M_free(AN.FunInfo,"funinfo");
00125     AN.numfuninfo = numfun + 10;
00126     AN.FunInfo = (FUN_INFO *)Malloc1(AN.numfuninfo*sizeof(FUN_INFO),"funinfo");
00127 }
00128 /*
00129     Now collect the information. First the locations.
00130 */
00131 p = pat + 1; i = 0;
00132 while ( p < info ) {
00133     if ( *p >= FUNCTION ) AN.FunInfo[i++].location = p;
00134     p += p[1];
00135 }
00136 for ( i = 0, finf = AN.FunInfo; i < numfun; i++, finf++ ) {
00137     p = finf->location;
00138     pstop = p + p[1];
00139     f = *p;
00140     if ( f > FUNCTION+WILDOFFSET ) f -= WILDOFFSET;
00141     finf->numargs = finf->numfunnies = finf->numwildcards = 0;
00142     finf->symmet = functions[f-FUNCTION].symmetric;
00143     finf->tensor = functions[f-FUNCTION].spec;
00144     finf->commute = functions[f-FUNCTION].commute;
00145     if ( finf->tensor >= TENSORFUNCTION ) {
00146         p += FUNHEAD;
00147         while ( p < pstop ) {
00148             if ( *p == FUNNYWILD ) {
00149                 finf->numfunnies++; p+= 2; continue;
00150             }
00151             else if ( *p < 0 ) {
00152                 if ( *p >= AM.OffsetVector + WILDOFFSET && *p < MINSPEC ) {
00153                     finf->numwildcards++;
00154                 }
00155             }
00156             else {
00157                 if ( *p >= AM.OffsetIndex + WILDOFFSET &&
00158                     *p <= AM.OffsetIndex + 2*WILDOFFSET ) finf->numwildcards++;
00159             }
00160             finf->numargs++;
00161             p++;

```

```

00162     }
00163 }
00164 else {
00165     p += FUNHEAD;
00166     while ( p < pstop ) {
00167         if ( *p > 0 ) { finf->numargs++; p += *p; continue; }
00168         if ( *p <= -FUNCTION ) {
00169             if ( *p <= -FUNCTION - WILDOFFSET ) finf->numwildcards++;
00170             p++;
00171         }
00172         else if ( *p == -SYMBOL ) {
00173             if ( p[1] >= 2*MAXPOWER ) finf->numwildcards++;
00174             p += 2;
00175         }
00176         else if ( *p == -INDEX ) {
00177             if ( p[1] >= AM.OffsetIndex + WILDOFFSET &&
00178                 p[1] <= AM.OffsetIndex + 2*WILDOFFSET ) finf->numwildcards++;
00179             p += 2;
00180         }
00181         else if ( *p == -VECTOR || *p == -MINVECTOR ) {
00182             if ( p[1] >= AM.OffsetVector + WILDOFFSET && p[1] < MINSPEC ) {
00183                 finf->numwildcards++;
00184             }
00185             p += 2;
00186         }
00187         else if ( *p == -ARGWILD ) {
00188             finf->numfunnies++;
00189             p += 2;
00190         }
00191         else { p += 2; }
00192         finf->numargs++;
00193     }
00194 }
00195 if ( finf->symmet ) {
00196     numsym++;
00197     allwilds += finf->numwildcards + finf->numfunnies;
00198 }
00199 }
00200 if ( numsym == 0 ) return(0);
00201 if ( allwilds == 0 ) return(0);
00202 /*
00203 We have the information in the array AN.FunInfo.
00204 We sort things and then write the sorted pattern.
00205 Of course we may not play with the order of the noncommuting functions.
00206 Of course we have to become even smarter in the future and look during
00207 the sorting which wildcards are assigned when.
00208 But for now this should do.
00209 */
00210 for ( nc = numfun-1; nc >= 0; nc-- ) { if ( AN.FunInfo[nc].commute ) break; }
00211
00212 finf = AN.FunInfo;
00213 for ( i = nc+2; i < numfun; i++ ) {
00214     fmin = finf; finf++;
00215     if ( ( finf->symmet < fmin->symmet ) || (
00216         ( finf->symmet == fmin->symmet ) &&
00217         ( ( finf->numwildcards+finf->numfunnies < fmin->numwildcards+fmin->numfunnies )
00218         || ( ( finf->numwildcards+finf->numfunnies == fmin->numwildcards+fmin->numfunnies )
00219         && ( finf->numwildcards < fmin->numfunnies ) ) ) ) ) {
00220         funscratch = AN.FunInfo[i];
00221         AN.FunInfo[i] = AN.FunInfo[i-1];
00222         AN.FunInfo[i-1] = funscratch;
00223         for ( j = i-1; j > nc && j > 0; j-- ) {
00224             f1 = AN.FunInfo[j];
00225             f2 = f1-1;
00226             if ( ( f1->symmet < f2->symmet ) || (
00227                 ( f1->symmet == f2->symmet ) &&
00228                 ( ( f1->numwildcards+f1->numfunnies < f2->numwildcards+f2->numfunnies )
00229                 || ( ( f1->numwildcards+f1->numfunnies == f2->numwildcards+f2->numfunnies )
00230                 && ( f1->numwildcards < f2->numfunnies ) ) ) ) ) {
00231                 funscratch = AN.FunInfo[j];
00232                 AN.FunInfo[j] = AN.FunInfo[j-1];
00233                 AN.FunInfo[j-1] = funscratch;
00234             }
00235             else break;
00236         }
00237     }
00238 }
00239 /*
00240 Now we rewrite the pattern. First into the space after it and then we
00241 copy it back. Be careful with the non-commutative functions. There the
00242 worst one should decide.
00243 */
00244 p = pat + 1;
00245 p2 = info;
00246 for ( i = 0; i < numfun; i++ ) {
00247     if ( i == nc ) {
00248         for ( k = 0; k <= nc; k++ ) {

```

```

00249         if ( AN.FunInfo[k].commute ) {
00250             p1 = AN.FunInfo[k].location; j = p1[1];
00251             NCOPY(p2,p1,j)
00252         }
00253     }
00254 }
00255 else if ( AN.FunInfo[i].commute == 0 ) {
00256     p1 = AN.FunInfo[i].location; j = p1[1];
00257     NCOPY(p2,p1,j)
00258 }
00259 }
00260 p = pat + 1; p1 = info;
00261 while ( p1 < p2 ) *p++ = *p1++;
00262 /*
00263     And now we place the relevant information in the info part
00264 */
00265 p2 = info+1;
00266 for ( i = 0; i < numfun; i++ ) {
00267     if ( i == nc ) {
00268         for ( k = 0; k <= nc; k++ ) {
00269             if ( AN.FunInfo[k].commute ) {
00270                 finf = AN.FunInfo + k;
00271                 *p2++ = finf->numargs;
00272                 *p2++ = finf->numwildcards;
00273                 *p2++ = finf->numfunnies;
00274                 *p2++ = finf->symmet;
00275             }
00276         }
00277     }
00278     else if ( AN.FunInfo[i].commute == 0 ) {
00279         finf = AN.FunInfo + i;
00280         *p2++ = finf->numargs;
00281         *p2++ = finf->numwildcards;
00282         *p2++ = finf->numfunnies;
00283         *p2++ = finf->symmet;
00284     }
00285 }
00286 *info = p2-info;
00287 lhs[1] = p2-lhs;
00288 return(0);
00289 }
00290
00291 /*
00292     #] StudyPattern :
00293     #[ MatchIsPossible :
00294
00295     We come here when there are functions and there is nontrivial
00296     symmetry related wildcarding.
00297 */
00298
00299 int MatchIsPossible(WORD *pattern, WORD *term)
00300 {
00301     GETIDENTITY
00302     WORD *info = pattern + *pattern;
00303     WORD *t, *tstop, *tt, *inf, *p;
00304     int numfun = 0, inpat, i, j, numargs;
00305     FUN_INFO *finf;
00306 /*
00307     We need a list of functions and their number of arguments
00308 */
00309     GETSTOP(term,tstop);
00310     t = term + 1;
00311     while ( t < tstop ) {
00312         if ( *t >= FUNCTION ) numfun++;
00313         t += t[1];
00314     }
00315     if ( numfun == 0 ) goto NotPossible;
00316     if ( *info == SETSET ) info += info[1];
00317     inpat = (*info-1)/4;
00318     if ( inpat > numfun ) goto NotPossible;
00319 /*
00320     We need now some room for the information about the functions
00321 */
00322     if ( numfun > AN.numfuninfo ) {
00323         if ( AN.FunInfo ) M_free(AN.FunInfo,"funinfo");
00324         AN.numfuninfo = numfun + 10;
00325         AN.FunInfo = (FUN_INFO *)Malloc1(AN.numfuninfo*sizeof(FUN_INFO),"funinfo");
00326     }
00327     t = term + 1; finf = AN.FunInfo;
00328     while ( t < tstop ) {
00329         if ( *t >= FUNCTION ) {
00330             finf->location = t;
00331             if ( functions[*t-FUNCTION].spec >= TENSORFUNCTION ) {
00332                 numargs = t[1]-FUNHEAD;
00333                 t += t[1];
00334             }
00335             else {

```

```


00336         numargs = 0;
00337         tt = t + t[1];
00338         t += FUNHEAD;
00339         while ( t < tt ) {
00340             numargs++;
00341             NEXTARG(t)
00342         }
00343     }
00344     finf->numargs = numargs;
00345     finf++;
00346 }
00347 else t += t[1];
00348 }
00349 /*
00350 Now we first find a partner for each function in the pattern
00351 with a fixed number of arguments
00352 */
00353 for ( i = 0, inf = info+1, p = pattern+1; i < inpat; i++, inf += 4, p+=p[1] ) {
00354     if ( inf[2] ) continue;
00355     if ( *p >= (FUNCTION+WILDOFFSET) ) continue;
00356     for ( j = 0, finf = AN.FunInfo; j < numfun; j++, finf++ ) {
00357         if ( *p == *(finf->location) && *inf == finf->numargs ) {
00358             finf->numargs = -finf->numargs-1;
00359             break;
00360         }
00361     }
00362     if ( j >= numfun ) goto NotPossible;
00363 }
00364 for ( i = 0, inf = info+1, p = pattern+1; i < inpat; i++, inf += 4, p+=p[1] ) {
00365     if ( inf[2] ) continue;
00366     if ( *p < (FUNCTION+WILDOFFSET) ) continue;
00367     for ( j = 0, finf = AN.FunInfo; j < numfun; j++, finf++ ) {
00368         if ( *inf == finf->numargs ) {
00369             finf->numargs = -finf->numargs-1;
00370             break;
00371         }
00372     }
00373     if ( j >= numfun ) goto NotPossible;
00374 }
00375 for ( i = 0, inf = info+1, p = pattern+1; i < inpat; i++, inf += 4, p+=p[1] ) {
00376     if ( inf[2] == 0 ) continue;
00377     if ( *p >= (FUNCTION+WILDOFFSET) ) continue;
00378     for ( j = 0, finf = AN.FunInfo; j < numfun; j++, finf++ ) {
00379         if ( *p == *(finf->location) && (*inf-inf[2]) <= finf->numargs ) {
00380             finf->numargs = -finf->numargs-1;
00381             break;
00382         }
00383     }
00384     if ( j >= numfun ) goto NotPossible;
00385 }
00386 for ( i = 0, inf = info+1, p = pattern+1; i < inpat; i++, inf += 4, p+=p[1] ) {
00387     if ( inf[2] == 0 ) continue;
00388     if ( *p < (FUNCTION+WILDOFFSET) ) continue;
00389     for ( j = 0, finf = AN.FunInfo; j < numfun; j++, finf++ ) {
00390         if ( (*inf-inf[2]) <= finf->numargs ) {
00391             finf->numargs = -finf->numargs-1;
00392             break;
00393         }
00394     }
00395     if ( j >= numfun ) goto NotPossible;
00396 }
00397 /*
00398 Thus far we have determined that for each function in the pattern
00399 there is a potential partner with enough arguments.
00400 For now the rest is up to the real pattern matcher.
00401
00402 To undo the disabling of the number of arguments we need this code
00403 for ( i = 0, finf = AN.FunInfo; i < numfun; i++, finf++ ) {
00404     if ( finf->numargs < 0 ) finf->numargs = -finf->numargs-1;
00405 }
00406 */
00407 return(1);
00408 NotPossible:
00409 /*
00410 PrintTerm(pattern,"p");
00411 PrintTerm(term,"t");
00412 */
00413 return(0);
00414 }
00415
00416 /*
00417 #] MatchIsPossible :
00418 */

```

4.131 sort.c File Reference

```
#include "form3.h"
```

Include dependency graph for sort.c:

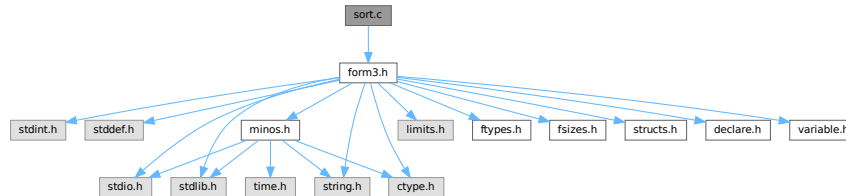

Macros

- `#define NEWSPLITMERGE`
- `#define NEWSPLITMERGETIMSORT`
- `#define HUMANSTRLEN 12`
- `#define HUMANSUFFLEN 4`
- `#define INSLENGTH(x) w[1] = FUNHEAD+ARGHEAD+x; w[FUNHEAD] = ARGHEAD+x;`

Functions

- void `HumanString` (char *string, float input, const char suffix[HUMANSUFFLEN][4])
- void `WriteStats` (POSITION *plspace, WORD par, WORD checkLogType)
- int `NewSort` (PHEAD0)
- LONG `EndSort` (PHEAD WORD *buffer, int par)
- LONG `PutIn` (FILEHANDLE *file, POSITION *position, WORD *buffer, WORD **take, int npat)
- int `Sflush` (FILEHANDLE *fi)
- WORD `PutOut` (PHEAD WORD *term, POSITION *position, FILEHANDLE *fi, WORD ncomp)
- int `FlushOut` (POSITION *position, FILEHANDLE *fi, int compr)
- int `AddCoef` (PHEAD WORD **ps1, WORD **ps2)
- int `AddPoly` (PHEAD WORD **ps1, WORD **ps2)
- void `AddArgs` (PHEAD WORD *s1, WORD *s2, WORD *m)
- WORD `Compare1` (PHEAD WORD *term1, WORD *term2, WORD level)
- WORD `CompareSymbols` (PHEAD WORD *term1, WORD *term2, WORD par)
- WORD `CompareHSymbols` (PHEAD WORD *term1, WORD *term2, WORD par)
- LONG `ComPress` (WORD **ss, LONG *n)
- LONG `SplitMerge` (PHEAD WORD **Pointer, LONG number)
- void `GarbHand` (void)
- int `MergePatches` (WORD par)
- int `StoreTerm` (PHEAD WORD *term)
- void `StageSort` (FILEHANDLE *fout)
- int `SortWild` (WORD *w, WORD nw)
- void `CleanUpSort` (int num)
- void `LowerSortLevel` (void)
- WORD * `PolyRatFunSpecial` (PHEAD WORD *t1, WORD *t2)
- void `SimpleSplitMergeRec` (WORD *array, WORD num, WORD *auxarray)
- void `SimpleSplitMerge` (WORD *array, WORD num)
- WORD `BinarySearch` (WORD *array, WORD num, WORD x)

Variables

- char * [totterms](#) [] = { " ", ">>", "-->" }
- const char [humanTermsSuffix](#) [HUMANSUFFLEN][4] = {"K ", "M ", "B ", "T "}
- const char [humanBytesSuffix](#) [HUMANSUFFLEN][4] = {"KiB", "MiB", "GiB", "TiB"}

4.131.1 Detailed Description

Contains the sort routines. We distinguish levels of sorting. The ground level is the sorting of terms in an expression. When a term has functions, the arguments can contain terms that need sorting, which this then done by raising the level. This can happen recursively. NewSort and EndSort automatically raise and lower the level. Because the ground level does some special things, sometimes we have to raise immediately to the second level skipping the ground level.

Special routines for the parallel sorting are in the file [threads.c](#). Also the sorting of terms in polynomials is special but most of that is controlled by changing the address of the compare routine. Other routines relevant for adding rational polynomials are in the file [polynito.c](#).

Definition in file [sort.c](#).

4.131.2 Macro Definition Documentation

4.131.2.1 NEWSPLITMERGE

```
#define NEWSPLITMERGE
```

Definition at line 53 of file [sort.c](#).

4.131.2.2 NEWSPLITMERGETIMSORT

```
#define NEWSPLITMERGETIMSORT
```

Definition at line 55 of file [sort.c](#).

4.131.2.3 HUMANSTRLEN

```
#define HUMANSTRLEN 12
```

Definition at line 91 of file [sort.c](#).

4.131.2.4 HUMANSUFFLEN

```
#define HUMANSUFFLEN 4
```

Definition at line 92 of file [sort.c](#).

4.131.2.5 INSLENGTH

```
#define INSLENGTH(
    x ) w[1] = FUNHEAD+ARGHEAD+x; w[FUNHEAD] = ARGHEAD+x;
```

Definition at line 2338 of file [sort.c](#).

4.131.3 Function Documentation

4.131.3.1 HumanString()

```
void HumanString (
    char * string,
    float input,
    const char suffix[HUMANSUFFLEN][4] )
```

Definition at line 95 of file [sort.c](#).

4.131.3.2 WriteStats()

```
void WriteStats (
    POSITION * plspace,
    WORD par,
    WORD checkLogType )
```

Writes the statistics.

Parameters

<i>plspace</i>	The size in bytes currently occupied
<i>par</i>	par = 0 = STATSSPLITMERGE after a splitmerge. par = 1 = STATSMERGETOFILE after merge to sortfile. par = 2 = STATSPOSTSORT after the sort
<i>checkLogType</i>	== CHECKLOGTYPE: The output should not go to the log file if AM.LogType is 1.


current expression is to be found in AR.CurExpr. terms are in S->TermsLeft. S->GenTerms.

Definition at line 127 of file [sort.c](#).

References [TimeCPU\(\)](#), and [TimeWallClock\(\)](#).

Referenced by [EndSort\(\)](#), [PF_Processor\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

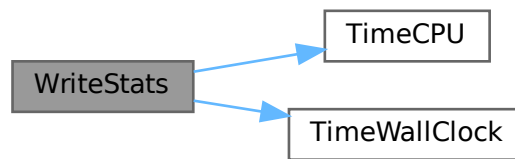

4.131.3.3 NewSort()

```
int NewSort (
    PHEAD0 )
```

Starts a new sort. At the lowest level this is a 'main sort' with the struct according to the parameters in `S0`. At higher levels this is a sort for functions, subroutines or dollars. We prepare the arrays and structs.

Returns

Regular convention (OK -> 0)

Definition at line 649 of file [sort.c](#).

Referenced by [generate_expression\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [MakeDollarInteger\(\)](#), [MakeDollarMod\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_sort\(\)](#), [poly_unfactorize_expression\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), [TakeArgContent\(\)](#), and [TestMatch\(\)](#).

4.131.3.4 EndSort()

```
LONG EndSort (
    PHEAD WORD * buffer,
    int par )
```

Finishes a sort. At `AR.sLevel == 0` the output is to the regular output stream. When `AR.sLevel > 0`, the parameter `par` determines the actual output. The `AR.sLevel` will be popped. All ongoing stages are finished and if the sortfile is open it is closed. The statistics are printed when `AR.sLevel == 0` `par == 0` [Output](#) to the buffer. `par == 1` Sort for function arguments. The output will be copied into the buffer. It is assumed that this is in the `WorkSpace`. `par == 2` Sort for `$-variable`. We return the address of the buffer that contains the output in `buffer` (treated like `WORD **`). We first catch the output in a file (unless we can intercept things after the small buffer has been sorted) Then we read from the file into a buffer. Only when `par == 0` data compression can be attempted at `AT.SS==AT.S0`.

Parameters

<i>buffer</i>	buffer for output when needed
<i>par</i>	See above

Returns


If negative: error. If positive: number of words in output.

Definition at line 745 of file [sort.c](#).

References [ComPress\(\)](#), [FlushOut\(\)](#), [MergePatches\(\)](#), [PF_EndSort\(\)](#), [PutOut\(\)](#), [SplitMerge\(\)](#), [StageSort\(\)](#), and [WriteStats\(\)](#).

Referenced by [generate_expression\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [MakeDollarInteger\(\)](#), [MakeDollarMod\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_sort\(\)](#), [poly_unfactorize_expression\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), [TakeArgContent\(\)](#), and [TestMatch\(\)](#).

Here is the call graph for this function:

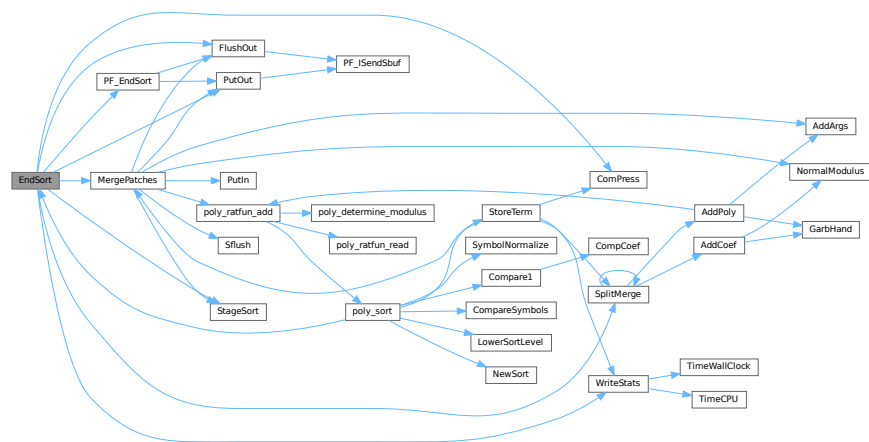

4.131.3.5 PutIn()

```

LONG PutIn (
    FILEHANDLE * file,
    POSITION * position,
    WORD * buffer,
    WORD ** take,
    int npat )

```

Reads a new patch from position in file handle. It is put at buffer, anything after take is moved forward. This would be part of a term that hasn't been used yet. Because of this there should be some space before the start of the buffer

Parameters

<i>file</i>	The file system from which to read
<i>position</i>	The position from which to read
<i>buffer</i>	The buffer into which to read
<i>take</i>	The unused tail should be moved before the buffer
<i>npat</i>	The number of the patch. Is needed if the information was compressed with gzip, because each patch has its own independent gzip encoding.

Definition at line 1324 of file [sort.c](#).

References [FiLe::handle](#).

Referenced by [MergePatches\(\)](#).

4.131.3.6 Sflush()

```
int Sflush (
    FILEHANDLE * fi )
```

Puts the contents of a buffer to output Only to be used when there is a single patch in the large buffer.

Parameters

<i>fi</i>	The filesystem (or its cache) to which the patch should be written
-----------	--

Definition at line 1384 of file [sort.c](#).

References [FiLe::handle](#).

Referenced by [MergePatches\(\)](#).

4.131.3.7 PutOut()

```
WORD PutOut (
    PHEAD WORD * term,
    POSITION * position,
    FILEHANDLE * fi,
    WORD ncomp )
```

Routine writes one term to file handle at position. It returns the new value of the position.

NOTE: For 'final output' we may have to index the brackets. See the struct BRACKETINDEX. We should maintain:
 1: a list with brackets array with the brackets
 2: a list of objects of type BRACKETINDEX. It contains array with either pointers or offsets to the list of brackets. starting positions in the file. The index may be tied to a maximum size. In that case we may have to prune the list occasionally.

Parameters


<i>term</i>	The term to be written
<i>position</i>	The position in the file. Afterwards it is updated
<i>fi</i>	The file (or its cache) to which should be written
<i>ncomp</i>	Information about what type of compression should be used

Definition at line 1470 of file [sort.c](#).

References [FiLe::handle](#), and [PF_ISendSbuf\(\)](#).

Referenced by [EndSort\(\)](#), [generate_expression\(\)](#), [MergePatches\(\)](#), [PF_EndSort\(\)](#), [PF_Processor\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:



4.131.3.8 FlushOut()

```
int FlushOut (
    POSITION * position,
    FILEHANDLE * fi,
    int compr )
```

Completes output to an output file and writes the trailing zero.

Parameters

<i>position</i>	The position in the file after writing
<i>fi</i>	The file (or its cache)
<i>compr</i>	Indicates whether there should be compression with gzip.

Returns

Regular conventions (OK -> 0).

Definition at line 1832 of file [sort.c](#).

References [FiLe::handle](#), [BrAcKeTiNfO::indexbuffer](#), and [PF_ISendSbuf\(\)](#).

Referenced by [EndSort\(\)](#), [MergePatches\(\)](#), [PF_EndSort\(\)](#), and [Processor\(\)](#).

Here is the call graph for this function:



4.131.3.9 AddCoef()

```
int AddCoef (
    PHEAD WORD ** ps1,
    WORD ** ps2 )
```

Adds the coefficients of the terms *ps1 and *ps2. The problem comes when there is not enough space for a new longer coefficient. First a local solution is tried. If this is not successful we need to move terms around. The possibility of a garbage collection should not be ignored, as avoiding this costs very much extra space which is nearly wasted otherwise.

If the return value is zero the terms cancelled.


The resulting term is left in *ps1.

Definition at line 2046 of file [sort.c](#).

References [GarbHand\(\)](#), and [NormalModulus\(\)](#).

Referenced by [SplitMerge\(\)](#).

Here is the call graph for this function:

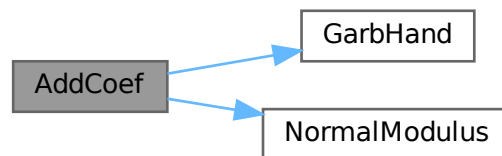

4.131.3.10 AddPoly()

```
int AddPoly (
    PHEAD WORD ** ps1,
    WORD ** ps2 )
```

Routine should be called when `S->PolyWise != 0`. It points then to the position of `AR.PolyFun` in both terms.

We add the contents of the arguments of the two polynomials. Special attention has to be given to special arguments. We have to reserve a space equal to the size of one term + the size of the argument of the other. The addition has to be done in this routine because not all objects are reentrant.

Newer addition (12-nov-2007). The `PolyFun` can have two arguments. In that case `S->PolyFlag` is 2 and we have to call the routine for adding rational polynomials. We have to be rather careful what happens with: The location of the output The order of the terms in the arguments At first we allow only univariate polynomials in the `PolyFun`. This restriction will be lifted a.s.a.p.

Parameters

<i>ps1</i>	A pointer to the position of the first term
<i>ps2</i>	A pointer to the position of the second term

Returns


If zero the terms cancel. Otherwise the new term is in *ps1.

Definition at line 2175 of file [sort.c](#).

References [AddArgs\(\)](#), [GarbHand\(\)](#), and [poly_ratfun_add\(\)](#).

Referenced by [SplitMerge\(\)](#).

Here is the call graph for this function:

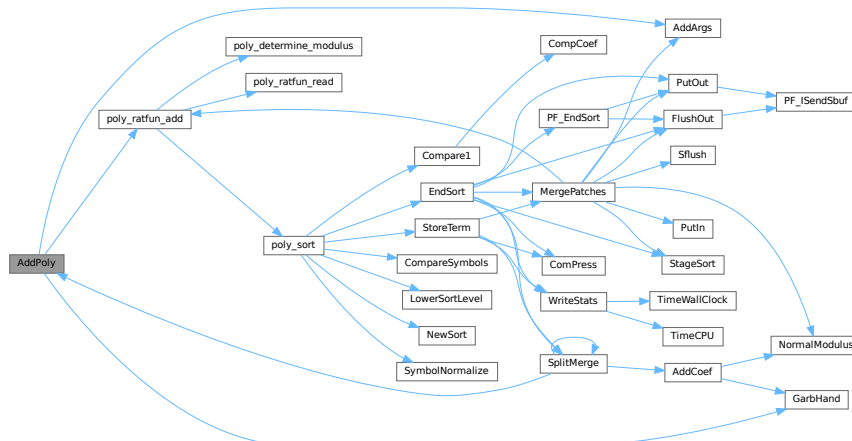

4.131.3.11 AddArgs()

```

void AddArgs (
    PHEAD WORD * s1,
    WORD * s2,
    WORD * m )
  
```

Adds the arguments of two occurrences of the PolyFun.

Parameters

<i>s1</i>	Pointer to the first occurrence.
<i>s2</i>	Pointer to the second occurrence.
<i>m</i>	Pointer to where the answer should be.

Definition at line 2347 of file [sort.c](#).

Referenced by [AddPoly\(\)](#), and [MergePatches\(\)](#).

4.131.3.12 Compare1()

```
WORD Compare1 (
    PHEAD WORD * term1,
    WORD * term2,
    WORD level )
```

Compares two terms. The answer is: 0 equal (with exception of the coefficient if level == 0.) >0 term1 comes first. <0 term2 comes first. Some special precautions may be needed to keep the CompCoef routine from generating overflows, although this is very unlikely in subterms. This routine should not return an error condition.

Originally this routine was called Compare. With the treatment of special polynomials with terms that contain only symbols and the need for extreme speed for the polynomial routines we made a special compare routine and now we store the address of the current compare routine in AR.CompareRoutine and have a macro Compare which makes all existing code work properly and we can just replace the routine on a thread by thread basis (each thread has its own AR struct).

Parameters

<i>term1</i>	First input term
<i>term2</i>	Second input term
<i>level</i>	The sorting level (may influence on the result)

Returns

0 equal (with exception of the coefficient if level == 0.) >0 term1 comes first. <0 term2 comes first.

When there are floating point numbers active (float_ = FLOATFUN) the presence of one or more float_ functions is returned in AT.SortFloatMode: 0: no float_ 1: float_ in term1 only 2: float_ in term2 only 3: float_ in both terms

Definition at line 2640 of file [sort.c](#).

References [CompCoef\(\)](#).

Referenced by [InFunction\(\)](#), [poly_sort\(\)](#), and [StartVariables\(\)](#).

Here is the call graph for this function:



4.131.3.13 CompareSymbols()

```
WORD CompareSymbols (
    PHEAD WORD * term1,
    WORD * term2,
    WORD par )
```

Compares the terms, based on the value of AN.polysortflag. If $\text{term1} < \text{term2}$ the return value is -1 If $\text{term1} > \text{term2}$ the return value is 1 If $\text{term1} = \text{term2}$ the return value is 0 The coefficients may differ. The terms contain only a single subterm of type SYMBOL. If AN.polysortflag = 0 it is a 'regular' compare. If AN.polysortflag = 1 the sum of the powers is more important par is a dummy parameter to make the parameter field identical to that of Compare1 which is the regular compare routine in [sort.c](#)

Definition at line 3110 of file [sort.c](#).

Referenced by [InFunction\(\)](#), and [poly_sort\(\)](#).

4.131.3.14 CompareHSymbols()

```
WORD CompareHSymbols (
    PHEAD WORD * term1,
    WORD * term2,
    WORD par )
```

Compares terms that can have only SYMBOL and HAAKJE subterms. If $\text{term1} < \text{term2}$ the return value is -1 If $\text{term1} > \text{term2}$ the return value is 1 If $\text{term1} = \text{term2}$ the return value is 0 par is a dummy parameter to make the parameter field identical to that of Compare1 which is the regular compare routine in [sort.c](#)

Definition at line 3153 of file [sort.c](#).

4.131.3.15 ComPress()

```
LONG ComPress (
    WORD ** ss,
    LONG * n )
```

Gets a list of pointers to terms and compresses the terms. In n it collects the number of terms and the return value of the function is the space that is occupied.

We have to pay some special attention to the compression of terms with a PolyFun. This PolyFun should occur only straight before the coefficient, so we can use the same trick as for the coefficient to sabotage compression of this object (Replace in the history the function pointer by zero. This is safe, because terms that would be identical otherwise would have been added).

Parameters

<i>ss</i>	Array of pointers to terms to be compressed.
<i>n</i>	Number of pointers in ss.

Returns

Total number of words needed for the compressed result.

Definition at line 3206 of file [sort.c](#).

Referenced by [EndSort\(\)](#), and [StoreTerm\(\)](#).

4.131.3.16 SplitMerge()

```
LONG SplitMerge (
    PHEAD WORD ** Pointer,
    LONG number )
```

Algorithm by J.A.M.Vermaseren (31-7-1988)

Note that AN.SplitScratch and AN.InScratch are used also in GarbHand

Merge sort in memory. The input is an array of pointers. Sorting is done recursively by dividing the array in two equal parts and calling SplitMerge for each. When the parts are small enough we can do the compare and take the appropriate action. An addition is that we look for 'runs'. Sequences that are already ordered. This happens a lot when there is very little action in a module. This made FORM faster by a few percent.

Parameters

<i>Pointer</i>	The array of pointers to the terms to be sorted.
<i>number</i>	The number of pointers in Pointer.


The terms are supposed to be sitting in the small buffer and there is supposed to be an extension to this buffer for when there are two terms that should be added and the result takes more space than each of the original terms. The notation guarantees that the result never needs more space than the sum of the spaces of the original terms.

Definition at line 3372 of file [sort.c](#).

References [AddCoef\(\)](#), [AddPoly\(\)](#), and [SplitMerge\(\)](#).

Referenced by [EndSort\(\)](#), [SplitMerge\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

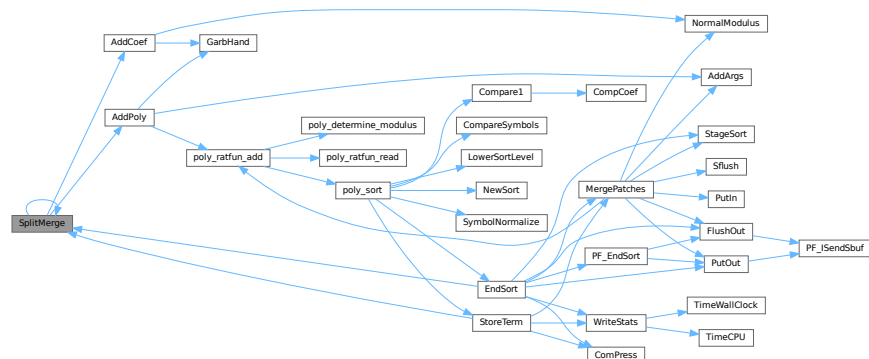

4.131.3.17 GarbHand()

```
void GarbHand (
    void )
```

Garbage collection that takes place when the small extension is full and we need to place more terms there. When this is the case there are many holes in the small buffer and the whole can be compactified. The major complication is the buffer for SplitMerge. There are two options for temporary memory: 1: find some buffer that has enough space (maybe in the large buffer). 2: allocate a buffer. Give it back afterwards of course. If the small extension is properly dimensioned this routine should be called very rarely. Most of the time it will be called when the polyfun or polyratfun is active.

Definition at line [3652](#) of file [sort.c](#).

Referenced by [AddCoef\(\)](#), and [AddPoly\(\)](#).

4.131.3.18 MergePatches()

```
int MergePatches (
    WORD par )
```

The general merge routine. Can be used for the large buffer and the file merging. The array S->Patches tells where the patches start S->pStop tells where they end (has to be computed first). The end of a 'line to be merged' is indicated by a zero. If the end is reached without running into a zero or a term runs over the boundary of a patch it is a file merging operation and a new piece from the file is read in.

Parameters


<i>par</i>	If <i>par</i> == 0 the sort is for file -> outputfile. If <i>par</i> == 1 the sort is for large buffer -> sortfile. If <i>par</i> == 2 the sort is for large buffer -> outputfile.
------------	--

Definition at line [3767](#) of file [sort.c](#).

References [AddArgs\(\)](#), [FlushOut\(\)](#), [File::handle](#), [NormalModulus\(\)](#), [poly_ratfun_add\(\)](#), [PutIn\(\)](#), [PutOut\(\)](#), [Sflush\(\)](#), and [StageSort\(\)](#).

Referenced by [EndSort\(\)](#), and [StoreTerm\(\)](#).

Here is the call graph for this function:

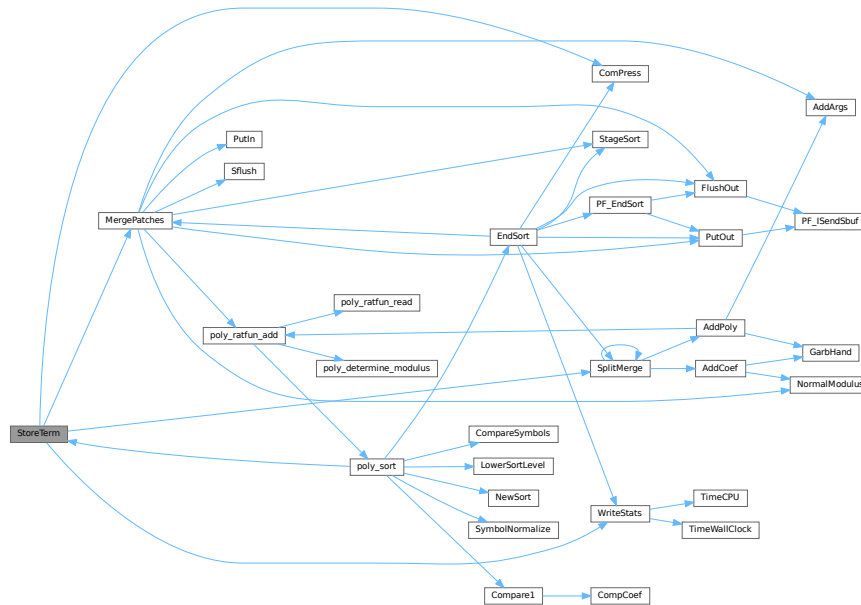

4.131.3.20 StageSort()

```
void StageSort (
    FILEHANDLE * fout )
```

Prepares a stage 4 or higher sort. Stage 4 sorts occur when the sort file contains more patches than can be merged in one pass.

Definition at line 4664 of file [sort.c](#).

References [FiLe::handle](#).

Referenced by [EndSort\(\)](#), and [MergePatches\(\)](#).

4.131.3.21 SortWild()

```
int SortWild (
    WORD * w,
    WORD nw )
```

Sorts the wildcard entries in the parameter w. Double entries are removed. Full space taken is nw words. Routine serves for the reading of wildcards in the compiler. The entries come in the format: (type,4,number,0) in which the zero is reserved for the future replacement of 'number'.

Parameters

<i>w</i>	buffer with wildcard entries.
<i>nw</i>	number of wildcard entries.

Returns

Normal conventions (OK -> 0)

Definition at line [4763](#) of file [sort.c](#).

4.131.3.22 CleanUpSort()

```
void CleanUpSort (
    int num )
```

Partially or completely frees function sort buffers.

Definition at line [4856](#) of file [sort.c](#).

4.131.3.23 LowerSortLevel()

```
void LowerSortLevel (
    void )
```

Lowers the level in the sort system.

Definition at line [4956](#) of file [sort.c](#).

Referenced by [generate_expression\(\)](#), [get_expression\(\)](#), [InFunction\(\)](#), [PF_CollectModifiedDollars\(\)](#), [PF_Processor\(\)](#), [poly_factorize_expression\(\)](#), [poly_sort\(\)](#), [poly_unfactorize_expression\(\)](#), [PolyFunMul\(\)](#), [Processor\(\)](#), and [TestMatch\(\)](#).

4.131.3.24 PolyRatFunSpecial()

```
WORD * PolyRatFunSpecial (
    PHEAD WORD * t1,
    WORD * t2 )
```

Definition at line [4973](#) of file [sort.c](#).

4.131.3.25 SimpleSplitMergeRec()

```
void SimpleSplitMergeRec (
    WORD * array,
    WORD num,
    WORD * auxarray )
```

Definition at line [5075](#) of file [sort.c](#).

4.131.3.26 SimpleSplitMerge()

```
void SimpleSplitMerge (
    WORD * array,
    WORD num )
```

Definition at line [5103](#) of file [sort.c](#).

4.131.3.27 BinarySearch()

```
WORD BinarySearch (
    WORD * array,
    WORD num,
    WORD x )
```

Definition at line 5121 of file [sort.c](#).

4.131.4 Variable Documentation

4.131.4.1 toterms

```
char* toterms[] = { " ", " >>", "-->" }
```

Definition at line 89 of file [sort.c](#).

4.131.4.2 humanTermsSuffix

```
const char humanTermsSuffix[HUMANSUFFLEN][4] = {"K ", "M ", "B ", "T "}
```

Definition at line 93 of file [sort.c](#).

4.131.4.3 humanBytesSuffix

```
const char humanBytesSuffix[HUMANSUFFLEN][4] = {"KiB", "MiB", "GiB", "TiB"}
```

Definition at line 94 of file [sort.c](#).

4.132 sort.c

[Go to the documentation of this file.](#)

```
00001
00017 /* # [ License : */
00018 /*
00019 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00020 * When using this file you are requested to refer to the publication
00021 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00022 * This is considered a matter of courtesy as the development was paid
00023 * for by FOM the Dutch physics granting agency and we would like to
00024 * be able to track its scientific use to convince FOM of its value
00025 * for the community.
00026 *
00027 * This file is part of FORM.
00028 *
00029 * FORM is free software: you can redistribute it and/or modify it under the
00030 * terms of the GNU General Public License as published by the Free Software
00031 * Foundation, either version 3 of the License, or (at your option) any later
00032 * version.
00033 *
00034 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00035 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00036 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00037 * details.
00038 *
00039 * You should have received a copy of the GNU General Public License along
00040 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00041 */
```



```

00042 /* #] License : */
00043 /*
00044     #[ Includes : sort.c
00045
00046     Sort routines according to new conventions (25-jun-1997).
00047     This is more object oriented.
00048     The active sort is indicated by AT.SS which should agree with
00049     AN.FunSorts[AR.sLevel];
00050
00051 #define GZIPDEBUG
00052 */
00053 #define NEWSPLITMERGE
00054 /* Comment to turn off Timsort in SplitMerge for debugging: */
00055 #define NEWSPLITMERGETIMSORT
00056 /* During SplitMerge, print pointer array state on entry. Very spammy, for debugging. */
00057 /* #define SPLITMERGEDEBUG */
00058 /* Debug printing for GarbHand */
00059 /* #define TESTGARB */
00060
00061 #include "form3.h"
00062
00063 #ifdef WITHPTHREADS
00064 UBYTE THRbuf[100];
00065 #endif
00066
00067 #ifdef WITHSTATS
00068 extern LONG numwrites;
00069 extern LONG numreads;
00070 extern LONG numseeks;
00071 extern LONG nummallocs;
00072 extern LONG numfrees;
00073 #endif
00074
00075 // #define COUNTCOMPARES
00076 #ifdef COUNTCOMPARES
00077     // This needs to be large enough for the number of threads.
00078     // It is hardcoded here, but 1024 should be enough.
00079     // Enabling this has a performance impact.
00080     LONG numcompares[1024];
00081 #endif
00082
00083 /*
00084     #] Includes :
00085     #[ SortUtilities :
00086         #[ WriteStats :
00087             void WriteStats(lspace,par,checkLogType)
00088 */
00089 char *totterms[] = { " ", " »", "-->" };
00090
00091 #define HUMANSTRLEN 12
00092 #define HUMANSUFFLEN 4
00093 const char humanTermsSuffix[HUMANSUFFLEN][4] = {"K ", "M ", "B ", "T "};
00094 const char humanBytesSuffix[HUMANSUFFLEN][4] = {"KiB", "MiB", "GiB", "TiB"};
00095 void HumanString(char* string, float input, const char suffix[HUMANSUFFLEN][4]) {
00096     int ind = -1;
00097     while (ind < 0 || (input >= 1000.0f && ind < HUMANSUFFLEN) ) {
00098         input /= 1000.0f;
00099         ind++;
00100     }
00101     if ( input <= 0.5f ) {
00102         snprintf(string, HUMANSTRLEN,
00103             " ( <1 %s)", suffix[ind]);
00104     }
00105     else {
00106         snprintf(string, HUMANSTRLEN,
00107             " (%3.f %s)", input, suffix[ind]);
00108     }
00109 }
00110
00127 void WriteStats(POSITION *plspace, WORD par, WORD checkLogType)
00128 {
00129     GETIDENTITY
00130     LONG millitime, y = 0x7FFFFFFFL » 1;
00131     WORD timepart;
00132     SORTING *S;
00133     POSITION pp;
00134     int use_wtime;
00135     if ( AT.SS == AT.S0 && AC.StatsFlag ) {
00136 #ifdef WITHPTHREADS
00137         if ( AC.ThreadStats == 0 && identity > 0 ) return;
00138 #elif defined(WITHMPI)
00139         if ( AC.OldParallelStats ) return;
00140         if ( ! AC.ProcessStats && PF.me != MASTER ) return;
00141 #endif
00142         if ( Expressions == 0 ) return;
00143
00144         if ( par == STATSSPLITMERGE ) {

```

```

00145         if ( AC.ShortStatsMax == 0 ) return;
00146         AR.ShortSortCount++;
00147         if ( AR.ShortSortCount < AC.ShortStatsMax ) return;
00148     }
00149     AR.ShortSortCount = 0;
00150
00151     S = AT.SS;
00152
00153     char humanGenTermsText[HUMANSTRLEN] = "";
00154     char humanTermsLeftText[HUMANSTRLEN] = "";
00155     char humanBytesText[HUMANSTRLEN] = "";
00156     if ( AC.HumanStatsFlag ) {
00157         HumanString(humanGenTermsText, (float)(S->GenTerms), humanTermsSuffix);
00158         HumanString(humanTermsLeftText, (float)(S->TermsLeft), humanTermsSuffix);
00159         HumanString(humanBytesText, (float)(BASEPOSITION(*plspace)), humanBytesSuffix);
00160     }
00161
00162     MLOCK(ErrorMessageLock);
00163
00164     /* If the statistics should not go to the log file, temporarily hide the
00165      * LogHandle. This must be done within the ErrorMessageLock region to
00166      * avoid a data race between threads. */
00167     const WORD oldLogHandle = AC.LogHandle;
00168     if ( checkLogType && AM.LogType ) {
00169         AC.LogHandle = -1;
00170     }
00171
00172     if ( AC.ShortStats ) {}
00173     else {
00174 #ifdef WITHPTHREADS
00175         if ( identity > 0 ) {
00176             MesPrint("                Thread %d reporting",identity);
00177         }
00178         else {
00179             MesPrint("");
00180         }
00181 #elif defined(WITHMPI)
00182         if ( PF.me != MASTER ) {
00183             MesPrint("                Process %d reporting",PF.me);
00184         }
00185         else {
00186             MesPrint("");
00187         }
00188 #else
00189         MesPrint("");
00190 #endif
00191     }
00192     /*
00193      * We define WTimeStatsFlag as a flag to print the wall-clock time on
00194      * the *master*, not in workers. This can be confusing in thread
00195      * statistics when short statistics is used. Technically,
00196      * TimeWallClock() is not thread-safe in TFORM.
00197      */
00198     use_wtime = AC.WTimeStatsFlag;
00199 #if defined(WITHPTHREADS)
00200     if ( use_wtime && identity > 0 ) use_wtime = 0;
00201 #elif defined(WITHMPI)
00202     if ( use_wtime && PF.me != MASTER ) use_wtime = 0;
00203 #endif
00204     millitime = use_wtime ? TimeWallClock(1) * 10 : TimeCPU(1);
00205     timepart = (WORD)(millitime%1000);
00206     millitime /= 1000;
00207     timepart /= 10;
00208     if ( AC.ShortStats ) {
00209 #if defined(WITHPTHREADS) || defined(WITHMPI)
00210 #ifdef WITHPTHREADS
00211         if ( identity > 0 ) {
00212 #else
00213         if ( PF.me != MASTER ) {
00214             const int identity = PF.me;
00215 #endif
00216         if ( par == STATSSPLITMERGE || par == STATSPOSTSORT ) {
00217             SETBASEPOSITION(pp,y);
00218             if ( ISLESSPOS(*plspace,pp) ) {
00219                 MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%10p %s %s",identity,
00220                     millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00221                     S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00222             /*
00223              * MesPrint("%d: %14s %17s %7l.%2is %8l>%10l%3s%10l:%10p",identity,
00224              * EXPRNAME(AR.CurExpr),AC.Commercial,millitime,timepart,
00225              * AN.ninterms,S->GenTerms,toterms[par],S->TermsLeft,plspace);
00226              */
00227             }
00228             else {
00229                 y = 1000000000L;
00230                 SETBASEPOSITION(pp,y);
00231                 MULPOS(pp,100);

```

```

00232         if ( ISLESSPOS(*plspace,pp) ) {
00233             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%11p %s %s",identity,
00234                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00235                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00236         }
00237     else {
00238         MULPOS(pp,10);
00239         if ( ISLESSPOS(*plspace,pp) ) {
00240             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%12p %s %s",identity,
00241                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00242                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00243         }
00244     else {
00245         MULPOS(pp,10);
00246         if ( ISLESSPOS(*plspace,pp) ) {
00247             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%13p %s %s",identity,
00248                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00249                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00250         }
00251     else {
00252         MULPOS(pp,10);
00253         if ( ISLESSPOS(*plspace,pp) ) {
00254             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%14p %s %s",identity,
00255                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00256                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00257         }
00258     else {
00259         MULPOS(pp,10);
00260         if ( ISLESSPOS(*plspace,pp) ) {
00261             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%15p %s %s",identity,
00262                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00263                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00264         }
00265     else {
00266         MULPOS(pp,10);
00267         if ( ISLESSPOS(*plspace,pp) ) {
00268             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%16p %s %s",identity,
00269                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00270                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00271         }
00272     else {
00273         MULPOS(pp,10);
00274         if ( ISLESSPOS(*plspace,pp) ) {
00275             MesPrint("%d: %7l.%2is %8l>%10l%3s%10l:%17p %s %s",identity,
00276                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00277                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00278         }
00279     } } } } }
00280     }
00281 }
00282 }
00283 else if ( par == STATSMERGETOFILE ) {
00284     SETBASEPOSITION(pp,y);
00285     if ( ISLESSPOS(*plspace,pp) ) {
00286         MesPrint("%d: %7l.%2is %10l:%10p",identity,millitime,timepart,
00287             S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00288     }
00289     else {
00290         y = 1000000000L;
00291         SETBASEPOSITION(pp,y);
00292         MULPOS(pp,100);
00293         if ( ISLESSPOS(*plspace,pp) ) {
00294             MesPrint("%d: %7l.%2is %10l:%11p",identity,millitime,timepart,
00295                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00296         }
00297     else {
00298         MULPOS(pp,10);
00299         if ( ISLESSPOS(*plspace,pp) ) {
00300             MesPrint("%d: %7l.%2is %10l:%12p",identity,millitime,timepart,
00301                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00302         }
00303     else {
00304         MULPOS(pp,10);
00305         if ( ISLESSPOS(*plspace,pp) ) {
00306             MesPrint("%d: %7l.%2is %10l:%13p",identity,millitime,timepart,
00307                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00308         }
00309     else {
00310         MULPOS(pp,10);
00311         if ( ISLESSPOS(*plspace,pp) ) {
00312             MesPrint("%d: %7l.%2is %10l:%14p",identity,millitime,timepart,
00313                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00314         }
00315     else {
00316         MULPOS(pp,10);
00317         if ( ISLESSPOS(*plspace,pp) ) {
00318             MesPrint("%d: %7l.%2is %10l:%15p",identity,millitime,timepart,

```

```

00319             S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00320         }
00321         else {
00322             MULPOS (pp,10);
00323             if ( ISLESSPOS(*plspace,pp) ) {
00324                 MesPrint ("%d: %7l.%2is %10l:%16p",identity,millitime,timepart,
00325                     S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00326             }
00327             else {
00328                 MULPOS (pp,10);
00329                 if ( ISLESSPOS(*plspace,pp) ) {
00330                     MesPrint ("%d: %7l.%2is %10l:%17p",identity,millitime,timepart,
00331                         S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00332                 }
00333             } } } }
00334         }
00335     }
00336 } } else
00337 #endif
00338 {
00339     if ( par == STATSSPLITMERGE || par == STATSPOSTSORT ) {
00340         SETBASEPOSITION (pp,y);
00341         if ( ISLESSPOS(*plspace,pp) ) {
00342             MesPrint ("%7l.%2is %8l>%10l%3s%10l:%10p %s %s",
00343                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00344                 S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00345             /*
00346             MesPrint ("%14s %17s %7l.%2is %8l>%10l%3s%10l:%10p",
00347                 EXPRNAME (AR.CurExpr),AC.Commercial,millitime,timepart,
00348                 AN.ninterms,S->GenTerms,toterms[par],S->TermsLeft,plspace);
00349             */
00350         }
00351         else {
00352             y = 1000000000L;
00353             SETBASEPOSITION (pp,y);
00354             MULPOS (pp,100);
00355             if ( ISLESSPOS(*plspace,pp) ) {
00356                 MesPrint ("%7l.%2is %8l>%10l%3s%10l:%11p %s %s",
00357                     millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00358                     S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00359             }
00360             else {
00361                 MULPOS (pp,10);
00362                 if ( ISLESSPOS(*plspace,pp) ) {
00363                     MesPrint ("%7l.%2is %8l>%10l%3s%10l:%12p %s %s",
00364                         millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00365                         S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00366                 }
00367                 else {
00368                     MULPOS (pp,10);
00369                     if ( ISLESSPOS(*plspace,pp) ) {
00370                         MesPrint ("%7l.%2is %8l>%10l%3s%10l:%13p %s %s",
00371                             millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00372                             S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00373                     }
00374                     else {
00375                         MULPOS (pp,10);
00376                         if ( ISLESSPOS(*plspace,pp) ) {
00377                             MesPrint ("%7l.%2is %8l>%10l%3s%10l:%14p %s %s",
00378                                 millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00379                                 S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00380                         }
00381                         else {
00382                             MULPOS (pp,10);
00383                             if ( ISLESSPOS(*plspace,pp) ) {
00384                                 MesPrint ("%7l.%2is %8l>%10l%3s%10l:%15p %s %s",
00385                                     millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00386                                     S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00387                             }
00388                             else {
00389                                 MULPOS (pp,10);
00390                                 if ( ISLESSPOS(*plspace,pp) ) {
00391                                     MesPrint ("%7l.%2is %8l>%10l%3s%10l:%16p %s %s",
00392                                         millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00393                                         S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00394                                 }
00395                                 else {
00396                                     MULPOS (pp,10);
00397                                     if ( ISLESSPOS(*plspace,pp) ) {
00398                                         MesPrint ("%7l.%2is %8l>%10l%3s%10l:%17p %s %s",
00399                                             millitime,timepart,AN.ninterms,S->GenTerms,toterms[par],
00400                                             S->TermsLeft,plspace,EXPRNAME (AR.CurExpr),AC.Commercial);
00401                                     }
00402                                 } } } } }
00403         }
00404     }
00405 }

```

```

00406         else if ( par == STATSMERGETOFILE ) {
00407             SETBASEPOSITION(pp,y);
00408             if ( ISLESSPOS(*plspace,pp) ) {
00409                 MesPrint("%7l.%2is %10l:%10p",millitime,timepart,
00410                     S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00411             }
00412             else {
00413                 y = 1000000000L;
00414                 SETBASEPOSITION(pp,y);
00415                 MULPOS(pp,100);
00416                 if ( ISLESSPOS(*plspace,pp) ) {
00417                     MesPrint("%7l.%2is %10l:%11p",millitime,timepart,
00418                         S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00419                 }
00420                 else {
00421                     MULPOS(pp,10);
00422                     if ( ISLESSPOS(*plspace,pp) ) {
00423                         MesPrint("%7l.%2is %10l:%12p",millitime,timepart,
00424                             S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00425                     }
00426                     else {
00427                         MULPOS(pp,10);
00428                         if ( ISLESSPOS(*plspace,pp) ) {
00429                             MesPrint("%7l.%2is %10l:%13p",millitime,timepart,
00430                                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00431                         }
00432                         else {
00433                             MULPOS(pp,10);
00434                             if ( ISLESSPOS(*plspace,pp) ) {
00435                                 MesPrint("%7l.%2is %10l:%14p",millitime,timepart,
00436                                     S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00437                             }
00438                             else {
00439                                 MULPOS(pp,10);
00440                                 if ( ISLESSPOS(*plspace,pp) ) {
00441                                     MesPrint("%7l.%2is %10l:%15p",millitime,timepart,
00442                                         S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00443                                 }
00444                                 else {
00445                                     MULPOS(pp,10);
00446                                     if ( ISLESSPOS(*plspace,pp) ) {
00447                                         MesPrint("%7l.%2is %10l:%16p",millitime,timepart,
00448                                             S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00449                                     }
00450                                     else {
00451                                         MULPOS(pp,10);
00452                                         if ( ISLESSPOS(*plspace,pp) ) {
00453                                             MesPrint("%7l.%2is %10l:%17p",millitime,timepart,
00454                                                 S->TermsLeft,plspace,EXPRNAME(AR.CurExpr),AC.Commercial);
00455                                         }
00456                                         } } } } }
00457                             }
00458                         }
00459                     }
00460                 } }
00461             else {
00462                 if ( par == STATSMERGETOFILE ) {
00463                     if ( use_wtime ) {
00464                         MesPrint("WTime = %7l.%2i sec",millitime,timepart);
00465                     }
00466                     else {
00467                         MesPrint("Time = %7l.%2i sec",millitime,timepart);
00468                     }
00469                 }
00470                 else {
00471                     #if ( BITSINLONG > 32 )
00472                     if ( S->GenTerms >= 10000000000L ) {
00473                         if ( use_wtime ) {
00474                             MesPrint("WTime = %7l.%2i sec    Generated terms = %16l%s",
00475                                 millitime,timepart,S->GenTerms,humanGenTermsText);
00476                         }
00477                         else {
00478                             MesPrint("Time = %7l.%2i sec    Generated terms = %16l%s",
00479                                 millitime,timepart,S->GenTerms,humanGenTermsText);
00480                         }
00481                     }
00482                     else {
00483                         if ( use_wtime ) {
00484                             MesPrint("WTime = %7l.%2i sec    Generated terms = %10l%s",
00485                                 millitime,timepart,S->GenTerms,humanGenTermsText);
00486                         }
00487                         else {
00488                             MesPrint("Time = %7l.%2i sec    Generated terms = %10l%s",
00489                                 millitime,timepart,S->GenTerms,humanGenTermsText);
00490                         }
00491                     }
00492                 }
00493             }
00494         }
00495     }
00496 }
00497 #else
00498

```

```

00493         if ( use_wtime ) {
00494             MesPrint("WTime = %7l.%2i sec    Generated terms = %10l%s",
00495                 millitime,timepart,S->GenTerms,humanGenTermsText);
00496         }
00497         else {
00498             MesPrint("Time = %7l.%2i sec    Generated terms = %10l%s",
00499                 millitime,timepart,S->GenTerms,humanGenTermsText);
00500         }
00501     #endif
00502 }
00503 #if ( BITSINLONG > 32 )
00504     if ( par == STATSSPLITMERGE )
00505         if ( S->TermsLeft >= 10000000000L ) {
00506             MesPrint("%16s%8l Terms %s = %16l%s",EXPRNAME(AR.CurExpr),
00507                 AN.ninterms,FG.swmes[par],S->TermsLeft,humanTermsLeftText);
00508         }
00509         else {
00510             MesPrint("%16s%8l Terms %s = %10l%s",EXPRNAME(AR.CurExpr),
00511                 AN.ninterms,FG.swmes[par],S->TermsLeft,humanTermsLeftText);
00512         }
00513     else {
00514         if ( S->TermsLeft >= 10000000000L ) {
00515             #ifdef WITHPTHREADS
00516                 if ( identity > 0 && par == STATSPOSTSORT ) {
00517                     MesPrint("%16s          Terms in thread = %16l%s",
00518                         EXPRNAME(AR.CurExpr),S->TermsLeft,humanTermsLeftText);
00519                 }
00520                 else
00521                     #elif defined(WITHMPI)
00522                     if ( PF.me != MASTER && par == STATSPOSTSORT ) {
00523                         MesPrint("%16s          Terms in process= %16l%s",
00524                             EXPRNAME(AR.CurExpr),S->TermsLeft,humanTermsLeftText);
00525                     }
00526                     else
00527                         #endif
00528                         {
00529                             MesPrint("%16s          Terms %s = %16l%s",
00530                                 EXPRNAME(AR.CurExpr),FG.swmes[par],S->TermsLeft,humanTermsLeftText);
00531                         }
00532                 }
00533                 else {
00534                     #ifdef WITHPTHREADS
00535                         if ( identity > 0 && par == STATSPOSTSORT ) {
00536                             MesPrint("%16s          Terms in thread = %10l%s",
00537                                 EXPRNAME(AR.CurExpr),S->TermsLeft,humanTermsLeftText);
00538                         }
00539                         else
00540                             #elif defined(WITHMPI)
00541                             if ( PF.me != MASTER && par == STATSPOSTSORT ) {
00542                                 MesPrint("%16s          Terms in process= %10l%s",
00543                                     EXPRNAME(AR.CurExpr),S->TermsLeft,humanTermsLeftText);
00544                             }
00545                             else
00546                                 #endif
00547                                 {
00548                                     MesPrint("%16s          Terms %s = %10l%s",
00549                                         EXPRNAME(AR.CurExpr),FG.swmes[par],S->TermsLeft,humanTermsLeftText);
00550                                 }
00551                         }
00552                 }
00553             #else
00554                 if ( par == STATSSPLITMERGE )
00555                     MesPrint("%16s%8l Terms %s = %10l%s",EXPRNAME(AR.CurExpr),
00556                         AN.ninterms,FG.swmes[par],S->TermsLeft,humanTermsLeftText);
00557                 else {
00558                     #ifdef WITHPTHREADS
00559                         if ( identity > 0 && par == STATSPOSTSORT ) {
00560                             MesPrint("%16s          Terms in thread = %10l%s",
00561                                 EXPRNAME(AR.CurExpr),S->TermsLeft,humanTermsLeftText);
00562                         }
00563                         else
00564                             #elif defined(WITHMPI)
00565                             if ( PF.me != MASTER && par == STATSPOSTSORT ) {
00566                                 MesPrint("%16s          Terms in process= %10l%s",
00567                                     EXPRNAME(AR.CurExpr),S->TermsLeft,humanTermsLeftText);
00568                             }
00569                             else
00570                                 #endif
00571                                 {
00572                                     MesPrint("%16s          Terms %s = %10l%s",
00573                                         EXPRNAME(AR.CurExpr),FG.swmes[par],S->TermsLeft,humanTermsLeftText);
00574                                 }
00575                         }
00576                     #endif
00577                     SETBASEPOSITION(pp,y);
00578                     if ( ISLESSPOS(*plspace,pp) ) {
00579                         MesPrint("%24s Bytes used          = %10p%s",AC.Commercial,plspace,humanBytesText);

```

```

00580     }
00581     else {
00582         y = 1000000000L;
00583         SETBASEPOSITION(pp,y);
00584         MULPOS(pp,100);
00585         if ( ISLESSPOS(*plspace,pp) ) {
00586             MesPrint("%24s Bytes used      =%11p%s",AC.Commercial,plspace,humanBytesText);
00587         }
00588         else {
00589             MULPOS(pp,10);
00590             if ( ISLESSPOS(*plspace,pp) ) {
00591                 MesPrint("%24s Bytes used      =%12p%s",AC.Commercial,plspace,humanBytesText);
00592             }
00593             else {
00594                 MULPOS(pp,10);
00595                 if ( ISLESSPOS(*plspace,pp) ) {
00596                     MesPrint("%24s Bytes used      =%13p%s",AC.Commercial,plspace,humanBytesText);
00597                 }
00598                 else {
00599                     MULPOS(pp,10);
00600                     if ( ISLESSPOS(*plspace,pp) ) {
00601                         MesPrint("%24s Bytes used      =%14p%s",AC.Commercial,plspace,humanBytesText);
00602                     }
00603                     else {
00604                         MULPOS(pp,10);
00605                         if ( ISLESSPOS(*plspace,pp) ) {
00606                             MesPrint("%24s Bytes used      =%15p%s",AC.Commercial,plspace,humanBytesText);
00607                         }
00608                         else {
00609                             MULPOS(pp,10);
00610                             if ( ISLESSPOS(*plspace,pp) ) {
00611                                 MesPrint("%24s Bytes used      =%16p%s",AC.Commercial,plspace,humanBytesText);
00612                             }
00613                             else {
00614                                 MULPOS(pp,10);
00615                                 if ( ISLESSPOS(*plspace,pp) ) {
00616                                     MesPrint("%24s Bytes used      =%17p%s",AC.Commercial,plspace,humanBytesText);
00617                                 }
00618                                 } } } } }
00619         }
00620     } }
00621 #ifdef WITHSTATS
00622     MesPrint("Total number of writes: %l, reads: %l, seeks, %l"
00623             ,numwrites,numreads,numseeks);
00624     MesPrint("Total number of mallocs: %l, frees: %l"
00625             ,nummallocs,numfrees);
00626 #endif
00627     /* Put back the original LogHandle, it was changed if the statistics were
00628      * not printed in the log file. */
00629     AC.LogHandle = oldLogHandle;
00630
00631     MUNLOCK(ErrorMessageLock);
00632 }
00633 }
00634
00635 /*
00636     #] WriteStats :
00637     #[ NewSort :          WORD NewSort()
00638 */
00649 int NewSort(PHEAD0)
00650 {
00651     GETBIDENTITY
00652     SORTING *S, **newFS;
00653     int i, newsize;
00654     if ( AN.SoScratC == 0 )
00655         AN.SoScratC = (UWORD *)Malloc1(2*(AM.MaxTal+2)*sizeof(UWORD),"NewSort");
00656     AR.sLevel++;
00657     if ( AR.sLevel >= AN.NumFunSorts ) {
00658         if ( AN.NumFunSorts == 0 ) newsize = 100;
00659         else newsize = 2*AN.NumFunSorts;
00660         newFS = (SORTING **)Malloc1((newsize+1)*sizeof(SORTING *),"FunSort pointers");
00661         for ( i = 0; i < AN.NumFunSorts; i++ ) newFS[i] = AN.FunSorts[i];
00662         for ( ; i <= newsize; i++ ) newFS[i] = 0;
00663         if ( AN.FunSorts ) M_free(AN.FunSorts,"FunSort pointers");
00664         AN.FunSorts = newFS; AN.NumFunSorts = newsize;
00665     }
00666     if ( AR.sLevel == 0 ) {
00667
00668 #ifdef COUNTCOMPARES
00669 #ifdef WITHPTHREADS
00670         numcompares[AT.identity] = 0;
00671 #else
00672         numcompares[0] = 0;
00673 #endif
00674 #endif
00675
00676         AN.FunSorts[0] = AT.S0;

```

```

00677         if ( AR.PolyFun == 0 ) { AT.S0->PolyFlag = 0; }
00678     else if ( AR.PolyFunType == 1 ) { AT.S0->PolyFlag = 1; }
00679     else if ( AR.PolyFunType == 2 ) {
00680         if ( AR.PolyFunExp == 2
00681             || AR.PolyFunExp == 3 ) AT.S0->PolyFlag = 1;
00682         else AT.S0->PolyFlag = 2;
00683     }
00684     AR.ShortSortCount = 0;
00685 }
00686 else {
00687     if ( AN.FunSorts[AR.sLevel] == 0 ) {
00688         AN.FunSorts[AR.sLevel] = AllocSort(
00689             AM.SLargeSize,AM.SSmallSize,AM.SSmallEsize,AM.STermsInSmall
00690             ,AM.SMaxPatches,AM.SMaxFpatches,AM.SIOsize,1);
00691     }
00692     AN.FunSorts[AR.sLevel]->PolyFlag = 0;
00693 }
00694 AT.SS = S = AN.FunSorts[AR.sLevel];
00695 S->sFill = S->sBuffer;
00696 S->lFill = S->lBuffer;
00697 S->lPatch = 0;
00698 S->fPatchN = 0;
00699 S->GenTerms = S->TermsLeft = S->GenSpace = S->SpaceLeft = 0;
00700 S->PoinFill = S->sPointer;
00701 *S->PoinFill = S->sFill;
00702 if ( AR.sLevel > 0 ) { S->PolyWise = 0; }
00703 PUTZERO(S->SizeInFile[0]); PUTZERO(S->SizeInFile[1]); PUTZERO(S->SizeInFile[2]);
00704 S->sTerms = 0;
00705 PUTZERO(S->file.POposition);
00706 S->stage4 = 0;
00707 if ( AR.sLevel > AN.MaxFunSorts ) AN.MaxFunSorts = AR.sLevel;
00708 /*
00709     The next variable is for the staged sort only.
00710     It should be treated differently
00711
00712     PUTZERO(AN.OldPosOut);
00713 */
00714 return(0);
00715 }
00716
00717 /*
00718     #] NewSort :
00719     #[ EndSort :                WORD EndSort(PHEAD buffer,par)
00720 */
00745 LONG EndSort(PHEAD WORD *buffer, int par)
00746 {
00747     GETBIDENTITY
00748     SORTING *S = AT.SS;
00749     WORD j, **ss, *to, *t;
00750     LONG sSpace, over, tover, spare, retval = 0;
00751     POSITION position, pp;
00752     off_t lSpace;
00753     FILEHANDLE *fout = 0, *oldoutfile = 0, *newout = 0;
00754
00755     if ( AM.exitflag && AR.sLevel == 0 ) return(0);
00756 #ifdef WITHMPI
00757     if( (retval = PF_EndSort()) > 0){
00758         oldoutfile = AR.outfile;
00759         retval = 0;
00760         goto RetRetval;
00761     }
00762     else if(retval < 0){
00763         retval = -1;
00764         goto RetRetval;
00765     }
00766     /* PF_EndSort returned 0: for S != AM.S0 and slaves still do the regular sort */
00767 #endif /* WITHMPI */
00768     oldoutfile = AR.outfile;
00769     /* PolyFlag repair action
00770     if ( S == AT.S0 ) {
00771         if ( AR.PolyFun == 0 ) { S->PolyFlag = 0; }
00772         else if ( AR.PolyFunType == 1 ) { S->PolyFlag = 1; }
00773         else if ( AR.PolyFunType == 2 ) {
00774             if ( AR.PolyFunExp == 2
00775                 || AR.PolyFunExp == 3 ) S->PolyFlag = 1;
00776             else S->PolyFlag = 2;
00777         }
00778         S->PolyWise = 0;
00779     }
00780     else {
00781         S->PolyFlag = S->PolyWise = 0;
00782     }
00783 */
00784     S->PolyWise = 0;
00785     *(S->PoinFill) = 0;
00786 #ifdef SPLITTIME
00787     PrintTime((UBYTE *)"EndSort, before SplitMerge");

```



```

00788 #endif
00789     S->sPointer[SplitMerge(BHEAD S->sPointer,S->sTerms)] = 0;
00790 #ifdef SPLITTIME
00791     PrintTime((UBYTE *)"Endsort,  after SplitMerge");
00792 #endif
00793     sSpace = 0;
00794     tover = over = S->sTerms;
00795     ss = S->sPointer;
00796     if ( over >= 0 ) {
00797         if ( S->lPatch > 0 || S->file.handle >= 0 ) {
00798             ss[over] = 0;
00799             sSpace = ComPress(ss,&spare);
00800             S->TermsLeft -= over - spare;
00801             if ( par == 1 ) { AR.outfile = newout = AllocFileHandle(0,(char *)0); }
00802         }
00803         else if ( S != AT.S0 ) {
00804             ss[over] = 0;
00805             if ( par == 2 ) {
00806                 sSpace = 3;
00807                 while ( ( t = *ss++ ) != 0 ) { sSpace += *t; }
00808                 if ( AN.tryterm > 0 && ( (sSpace+1)*sizeof(WORD) < (size_t)(AM.MaxTer) ) ) {
00809                     to = TermMalloc("$-sort space");
00810                 }
00811                 else {
00812                     LONG allocsp = sSpace+1;
00813                     if ( allocsp < MINALLOC ) allocsp = MINALLOC;
00814                     allocsp = ((allocsp+7)/8)*8;
00815                     to = (WORD *)Malloc1(allocsp*sizeof(WORD),"$-sort space");
00816                     if ( AN.tryterm > 0 ) AN.tryterm = 0;
00817                 }
00818                 *((WORD **)buffer) = to;
00819                 ss = S->sPointer;
00820                 while ( ( t = *ss++ ) != 0 ) {
00821                     j = *t; while ( --j >= 0 ) *to++ = *t++;
00822                 }
00823                 *to = 0;
00824                 retval = sSpace + 1;
00825             }
00826             else {
00827                 to = buffer;
00828                 sSpace = 0;
00829                 while ( ( t = *ss++ ) != 0 ) {
00830                     j = *t;
00831                     if ( ( sSpace += j ) > AM.MaxTer/((LONG)sizeof(WORD)) ) {
00832                         /* Too big! Get the total size for useful error message */
00833                         while ( ( t = *ss++ ) != 0 ) {
00834                             sSpace += *t;
00835                         }
00836                         MLOCK(ErrorMessageLock);
00837                         MesPrint("Sorted function argument too long (%d words). Increase MaxTermSize
(%d words).", sSpace, AM.MaxTer/((LONG)sizeof(WORD)));
00838                         MUNLOCK(ErrorMessageLock);
00839                         retval = -1; goto RetRetVal;
00840                     }
00841                     while ( --j >= 0 ) *to++ = *t++;
00842                 }
00843                 *to = 0;
00844                 retval = to - buffer;
00845             }
00846             goto RetRetVal;
00847         }
00848         else {
00849             POSITION oldpos;
00850             if ( S == AT.S0 ) {
00851                 fout = AR.outfile;
00852                 *AR.CompressPointer = 0;
00853                 SeekScratch(AR.outfile,&position);
00854             }
00855             else {
00856                 fout = &(S->file);
00857                 PUTZERO(position);
00858             }
00859             oldpos = position;
00860             S->TermsLeft = 0;
00861             /*
00862             Here we can go directly to the output.
00863             */
00864             #ifdef WITHZLIB
00865             { int oldgzipCompress = AR.gzipCompress;
00866               AR.gzipCompress = 0;
00867             }
00868             #endif
00869             if ( tover > 0 ) {
00870                 ss = S->sPointer;
00871                 while ( ( t = *ss++ ) != 0 ) {
00872                     if ( *t ) S->TermsLeft++;
00873                 }
00874             }
00875             #ifdef WITHPTHREADS
00876             if ( AS.MasterSort && ( fout == AR.outfile ) ) { PutToMaster(BHEAD t); }
00877         }
00878     }

```

```

00874             else
00875 #endif
00876             if ( PutOut(BHEAD t,&position,fout,1) < 0 ) {
00877                 retval = -1; goto RetRetval;
00878             }
00879         }
00880     }
00881 #ifdef WITHPTHREADS
00882     if ( AS.MasterSort && ( fout == AR.outfile ) ) { PutToMaster(BHEAD 0); }
00883     else
00884 #endif
00885     if ( FlushOut(&position,fout,1) ) {
00886         retval = -1; goto RetRetval;
00887     }
00888 #ifdef WITHZLIB
00889     AR.gzipCompress = oldgzipCompress;
00890 }
00891 #endif
00892 #ifdef WITHPTHREADS
00893     if ( AS.MasterSort && ( fout == AR.outfile ) ) goto RetRetval;
00894 #endif
00895 #ifdef WITHMPI
00896     if ( PF.me != MASTER && PF.exprtodo < 0 ) goto RetRetval;
00897 #endif
00898     DIFPOS(oldpos,position,oldpos);
00899     S->SpaceLeft = BASEPOSITION(oldpos);
00900     WriteStats(&oldpos,STATSPOSTSORT,NOCHECKLOGTYPE);
00901     pp = oldpos;
00902     goto RetRetval;
00903 }
00904 }
00905 else if ( par == 1 && newout == 0 ) { AR.outfile = newout = AllocFileHandle(0,(char *)0); }
00906 sSpace++;
00907 lSpace = sSpace + (S->lFill - S->lBuffer) - (LONG)S->lPatch*(AM.MaxTer/sizeof(WORD));
00908 /* Note wrt MaxTer and lPatch: each patch starts with space for decompression */
00909 /* Not needed if only large buffer, but needed when using files (?) */
00910 SETBASEPOSITION(pp,lSpace);
00911 MULPOS(pp,sizeof(WORD));
00912 if ( S->file.handle >= 0 ) {
00913     ADD2POS(pp,S->fPatches[S->fPatchN]);
00914 }
00915 if ( S == AT.S0 ) {
00916     if ( S->lPatch > 0 || S->file.handle >= 0 ) {
00917         WriteStats(&pp,STATSSPLITMERGE,CHECKLOGTYPE);
00918     }
00919 }
00920 if ( par == 2 ) { AR.outfile = newout = AllocFileHandle(0,(char *)0); }
00921 if ( S->lPatch > 0 ) {
00922     if ( ( S->lPatch >= S->MaxPatches ) ||
00923         ( ( WORD * )(((UBYTE *) (S->lFill + sSpace)) + 2*AM.MaxTer) ) >= S->lTop ) ) {
00924 /*
00925         The large buffer is too full. Merge and write it
00926 */
00927 #ifdef GZIPDEBUG
00928         MLOCK(ErrorMessageLock);
00929         MesPrint("%w EndSort: lPatch = %d, MaxPatches = %d,lFill = %x, sSpace = %ld, MaxTer = %d,
00930             lTop = %x"
00931             ,S->lPatch,S->MaxPatches,S->lFill,sSpace,AM.MaxTer/sizeof(WORD),S->lTop);
00932         MUNLOCK(ErrorMessageLock);
00933 #endif
00934         if ( MergePatches(1) ) {
00935             MLOCK(ErrorMessageLock);
00936             MesCall("EndSort");
00937             MUNLOCK(ErrorMessageLock);
00938             retval = -1; goto RetRetval;
00939         }
00940         S->lPatch = 0;
00941         pp = S->SizeInFile[1];
00942         MULPOS(pp,sizeof(WORD));
00943 #ifndef WITHPTHREADS
00944         if ( S == AT.S0 )
00945 #endif
00946         {
00947             POSITION pppp;
00948             SETBASEPOSITION(pppp,0);
00949             SeekFile(S->file.handle,&pppp,SEEK_CUR);
00950             SeekFile(S->file.handle,&pp,SEEK_END);
00951             SeekFile(S->file.handle,&pppp,SEEK_SET);
00952             WriteStats(&pp,STATSMERGETOFILE,CHECKLOGTYPE);
00953             UpdateMaxSize();
00954         }
00955     }
00956     else {
00957         S->Patches[S->lPatch++] = S->lFill;
00958         to = (WORD * )(((UBYTE *) (S->lFill)) + AM.MaxTer);
00959         if ( tover > 0 ) {

```

```

00960         ss = S->sPointer;
00961         while ( ( t = *ss++ ) != 0 ) {
00962             j = *t;
00963             if ( j < 0 ) j = t[1] + 2;
00964             while ( --j >= 0 ) *to++ = *t++;
00965         }
00966     }
00967     *to++ = 0;
00968     S->lFill = to;
00969     if ( S->file.handle < 0 ) {
00970         if ( MergePatches(2) ) {
00971             MLOCK(ErrorMessageLock);
00972             MesCall("EndSort");
00973             MUNLOCK(ErrorMessageLock);
00974             retval = -1; goto RetRetval;
00975         }
00976         if ( S == AT.S0 ) {
00977             pp = S->SizeInFile[2];
00978             MULPOS(pp, sizeof(WORD));
00979 #ifdef WITHPTHREADS
00980             if ( AS.MasterSort && ( fout == AR.outfile ) ) goto RetRetval;
00981 #endif
00982             WriteStats(&pp, STATSPOSTSORT, NOCHECKLOGTYPE);
00983             UpdateMaxSize();
00984         }
00985         else {
00986             if ( par == 2 && newout->handle >= 0 ) {
00987                 POSITION zeropos;
00988                 PUTZERO(zeropos);
00989 #ifdef ALLLOCK
00990                 LOCK(newout->pthreadlock);
00991 #endif
00992                 SeekFile(newout->handle, &zeropos, SEEK_SET);
00993                 to = (WORD *)Malloc1(BASEPOSITION(newout->filesize)+sizeof(WORD)*2
00994                                     , "$-buffer reading");
00995                 if ( AN.tryterm > 0 ) AN.tryterm = 0;
00996                 if ( ( retval = ReadFile(newout->handle, (UBYTE
00997 *)to, BASEPOSITION(newout->filesize)) ) !=
00997                     BASEPOSITION(newout->filesize) ) {
00998                     MLOCK(ErrorMessageLock);
00999                     MesPrint("Error reading information for $ variable");
01000                     MUNLOCK(ErrorMessageLock);
01001                     M_free(to, "$-buffer reading");
01002                     retval = -1;
01003                 }
01004                 else {
01005                     *((WORD *)buffer) = to;
01006                     retval /= sizeof(WORD);
01007                 }
01008 #ifdef ALLLOCK
01009                 UNLOCK(newout->pthreadlock);
01010 #endif
01011             }
01012             else if ( newout->handle >= 0 ) {
01013 /*
01014         We land here if par == 1 (function arg sort) and PutOut has created a file.
01015         This means that the term is larger than SIOsize, which we ensure is at least
01016         as large as MaxTermSize in setfile.c. Thus we know already that the term won't
01017         fit.
01018 */
01019         TooLarge:
01020             MLOCK(ErrorMessageLock);
01021             MesPrint("(1) Output should fit inside a single term. Increase MaxTermSize?");
01022             MesCall("EndSort");
01023             MUNLOCK(ErrorMessageLock);
01024             retval = -1; goto RetRetval;
01025         }
01026         else {
01027             t = newout->PObuffer;
01028             // We deal with the par == 2 case after RetRetval.
01029             if ( par != 2 ) {
01030                 j = newout->POfill - t;
01031                 to = buffer;
01032                 if ( to >= AT.WorkSpace && to < AT.WorkTop && to+j > AT.WorkTop )
01033                     goto WorkspaceError;
01034                 if ( j > AM.MaxTer ) {
01035                     MLOCK(ErrorMessageLock);
01036                     MesPrint("Encountered term of size: %d words.", j/(LONG)sizeof(WORD)
01037 );
01038                     MUNLOCK(ErrorMessageLock);
01039                     goto TooLarge;
01040                 }
01041                 NCOPY(to, t, j);
01042                 retval = to - buffer - 1;
01043             }
01044         }
01045     }

```

```

01044         goto RetRetval;
01045     }
01046     if ( MergePatches(1) ) { /* --> SortFile */
01047         MLOCK(ErrorMessageLock);
01048         MesCall("EndSort");
01049         MUNLOCK(ErrorMessageLock);
01050         retval = -1; goto RetRetval;
01051     }
01052     UpdateMaxSize();
01053     pp = S->SizeInFile[1];
01054     MULPOS(pp, sizeof(WORD));
01055 #ifndef WITHPTHREADS
01056     if ( S == AT.S0 )
01057 #endif
01058     {
01059         POSITION pppp;
01060         SETBASEPOSITION(pppp, 0);
01061         SeekFile(S->file.handle, &pppp, SEEK_CUR);
01062         SeekFile(S->file.handle, &pp, SEEK_END);
01063         SeekFile(S->file.handle, &pppp, SEEK_SET);
01064         WriteStats(&pp, STATSMERGETOFILE, CHECKLOGTYPE);
01065     }
01066 #ifdef WITHERRORXXX
01067     if ( S != AT.S0 ) {
01068         /*
01069             This is wrong! We have sorted to the sort file.
01070             Things are not sitting in the output yet.
01071         */
01072         if ( newout->handle >= 0 ) goto TooLarge;
01073         t = newout->PObuffer;
01074         j = newout->POfill - t;
01075         to = buffer;
01076         if ( to >= AT.WorkSpace && to < AT.WorkTop && to+j > AT.WorkTop )
01077             goto WorkspaceError;
01078         if ( j > AM.MaxTer ) goto TooLarge;
01079         NCOPY(to, t, j);
01080         goto RetRetval;
01081     }
01082 #endif
01083     }
01084     if ( S->file.handle >= 0 ) {
01085 #ifdef GZIPDEBUG
01086         MLOCK(ErrorMessageLock);
01087         MesPrint("%w EndSort: fPatchN = %d, lPatch = %d, position = %12p"
01088             , S->fPatchN, S->lPatch, &(S->fPatches[S->fPatchN]));
01089         MUNLOCK(ErrorMessageLock);
01090 #endif
01091         if ( S->lPatch <= 0 ) {
01092             StageSort(&(S->file));
01093             position = S->fPatches[S->fPatchN];
01094             ss = S->sPointer;
01095             if ( *ss ) {
01096                 *AR.CompressPointer = 0;
01097 #ifdef WITHZLIB
01098                 if ( S == AT.S0 && AR.NoCompress == 0 && AR.gzipCompress > 0 )
01099                     S->fpcompressed[S->fPatchN] = 1;
01100                 else
01101                     S->fpcompressed[S->fPatchN] = 0;
01102                 SetupOutputGZIP(&(S->file));
01103 #endif
01104                 while ( ( t = *ss++ ) != 0 ) {
01105                     if ( PutOut(BHEAD t, &position, &(S->file), 1) < 0 ) {
01106                         retval = -1; goto RetRetval;
01107                     }
01108                 }
01109                 if ( FlushOut(&position, &(S->file), 1) ) {
01110                     retval = -1; goto RetRetval;
01111                 }
01112                 ++(S->fPatchN);
01113                 S->fPatches[S->fPatchN] = position;
01114                 UpdateMaxSize();
01115 #ifdef GZIPDEBUG
01116                 MLOCK(ErrorMessageLock);
01117                 MesPrint("%w EndSort+: fPatchN = %d, lPatch = %d, position = %12p"
01118                     , S->fPatchN, S->lPatch, &(S->fPatches[S->fPatchN]));
01119                 MUNLOCK(ErrorMessageLock);
01120 #endif
01121             }
01122         }
01123     }
01124     AR.Stage4Name = 0;
01125 #ifdef WITHPTHREADS
01126     if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
01127         if ( S->file.handle >= 0 ) {
01128             SynchFile(S->file.handle);
01129         }
01130     }

```

```

01131 #endif
01132     UpdateMaxSize();
01133     if ( MergePatches(0) ) {
01134         MLOCK(ErrorMessageLock);
01135         MesCall("EndSort");
01136         MUNLOCK(ErrorMessageLock);
01137         retval = -1; goto RetRetval;
01138     }
01139     S->stage4 = 0;
01140 #ifdef WITHPTHREADS
01141     if ( AS.MasterSort && ( fout == AR.outfile ) ) goto RetRetval;
01142 #endif
01143     pp = S->SizeInFile[0];
01144     MULPOS(pp, sizeof(WORD));
01145     WriteStats(&pp, STATSPOSTSORT, NOCHECKLOGTYPE);
01146     UpdateMaxSize();
01147 }
01148 RetRetval:
01149
01150 #ifdef WITHMPI
01151 /* NOTE: PF_EndSort has been changed such that it sets S->TermsLeft. (TU 30 Jun 2011) */
01152 if ( AR.sLevel == 0 && (PF.me == MASTER || PF.exprtodo >= 0) ) {
01153     Expressions[AR.CurExpr].counter = S->TermsLeft;
01154     Expressions[AR.CurExpr].size = pp;
01155 }
01156 #else
01157 if ( AR.sLevel == 0 ) {
01158     Expressions[AR.CurExpr].counter = S->TermsLeft;
01159     Expressions[AR.CurExpr].size = pp;
01160 } /*if ( AR.sLevel == 0 )*/
01161 #endif
01162 /*:[25nov2003 mt]*/
01163 if ( S->file.handle >= 0 && ( par != 1 ) && ( par != 2 ) ) {
01164     /* sortfile is still open */
01165     UpdateMaxSize();
01166 #ifdef WITHZLIB
01167     ClearSortGZIP(&(S->file));
01168 #endif
01169     CloseFile(S->file.handle);
01170     S->file.handle = -1;
01171     remove(S->file.name);
01172 #ifdef GZIPDEBUG
01173     MLOCK(ErrorMessageLock);
01174     MesPrint("%wEndSort: sortfile %s removed", S->file.name);
01175     MUNLOCK(ErrorMessageLock);
01176 #endif
01177 }
01178 AR.outfile = oldoutfile;
01179 AR.sLevel--;
01180 if ( AR.sLevel >= 0 ) AT.SS = AN.FunSorts[AR.sLevel];
01181 if ( par == 1 ) {
01182     if ( retval < 0 ) {
01183         UpdateMaxSize();
01184         if ( newout ) {
01185             DeAllocFileHandle(newout);
01186             newout = 0;
01187         }
01188     }
01189     else if ( newout ) {
01190         if ( newout->handle >= 0 ) {
01191             MLOCK(ErrorMessageLock);
01192             MesPrint("(2)Output should fit inside a single term. Increase MaxTermSize?");
01193             MesCall("EndSort");
01194             MUNLOCK(ErrorMessageLock);
01195             Terminate(-1);
01196         }
01197         else if ( newout->POfill > newout->PObuffer ) {
01198 /*
01199             Here we have to copy the contents of the 'file' into
01200             the buffer. We assume that this buffer lies in the Workspace.
01201             Hence
01202 */
01203             j = newout->POfill - newout->PObuffer;
01204             if ( buffer >= AT.WorkSpace && buffer < AT.WorkTop && buffer+j > AT.WorkTop )
01205                 goto WorkspaceError;
01206             else {
01207                 to = buffer; t = newout->PObuffer;
01208                 while ( j-- > 0 ) *to++ = *t++;
01209             }
01210             UpdateMaxSize();
01211         }
01212         DeAllocFileHandle(newout);
01213         newout = 0;
01214     }
01215 }
01216 else if ( par == 2 ) {
01217     if ( newout ) {

```

```

01218         if ( retval == 0 ) {
01219             if ( newout->handle >= 0 ) {
01220                 /*
01221                     output resides at the moment in a file
01222                     Find the size, make a buffer, copy into the buffer and clean up.
01223                 */
01224                 POSITION zeropos;
01225                 PUTZERO(position);
01226 #ifdef ALLLOCK
01227                 LOCK(newout->pthreadslck);
01228 #endif
01229                 SeekFile(newout->handle,&position,SEEK_END);
01230                 PUTZERO(zeropos);
01231                 SeekFile(newout->handle,&zeropos,SEEK_SET);
01232                 to = (WORD *)Malloc1(BASEPOSITION(position)+sizeof(WORD)*3
01233                     ,"$-buffer reading");
01234                 if ( AN.tryterm > 0 ) AN.tryterm = 0;
01235                 if ( ( retval = ReadFile(newout->handle, (UBYTE *)to,BASEPOSITION(position)) ) !=
01236                     BASEPOSITION(position) ) {
01237                     MLOCK(ErrorMessageLock);
01238                     MesPrint("Error reading information for $ variable");
01239                     MUNLOCK(ErrorMessageLock);
01240                     M_free(to,"$-buffer reading");
01241                     retval = -1;
01242                 }
01243                 else {
01244                     *((WORD **)buffer) = to;
01245                     retval /= sizeof(WORD);
01246                 }
01247 #ifdef ALLLOCK
01248                 UNLOCK(newout->pthreadslck);
01249 #endif
01250             }
01251             else {
01252                 /*
01253                     output resides in the cache buffer and the file was never opened
01254                 */
01255                 LONG wsiz = newout->POfill - newout->PObuffer;
01256                 if ( AN.tryterm > 0 && ( (wsiz+2)*sizeof(WORD) < (size_t)(AM.MaxTer) ) ) {
01257                     to = TermMalloc("$-sort space");
01258                 }
01259                 else {
01260                     LONG allocsp = wsiz+2;
01261                     if ( allocsp < MINALLOC ) allocsp = MINALLOC;
01262                     allocsp = ((allocsp+7)/8)*8;
01263                     to = (WORD *)Malloc1(allocsp*sizeof(WORD),"$-buffer reading");
01264                     if ( AN.tryterm > 0 ) AN.tryterm = 0;
01265                 }
01266                 *((WORD **)buffer) = to; t = newout->PObuffer;
01267                 retval = wsiz;
01268                 NCOPY(to,t,wsiz);
01269             }
01270         }
01271         UpdateMaxSize();
01272         DeAllocFileHandle(newout);
01273         newout = 0;
01274     }
01275 }
01276 else {
01277     if ( newout ) {
01278         DeAllocFileHandle(newout);
01279         newout = 0;
01280     }
01281 }
01282
01283 #ifdef COUNTCOMPARES
01284     if ( AR.sLevel < 0 ) {
01285 #ifdef WITHPTHREADS
01286         MLOCK(ErrorMessageLock);
01287         MesPrint(">>number of calls to Compare: %l (tid %d)", numcompares[AT.identity], AT.identity);
01288         MUNLOCK(ErrorMessageLock);
01289 #else
01290         MesPrint(">>number of calls to Compare: %l", numcompares[0]);
01291 #endif
01292     }
01293 #endif
01294
01295     return(retval);
01296 WorkspaceError:
01297     MLOCK(ErrorMessageLock);
01298     MesWork();
01299     MesCall("EndSort");
01300     MUNLOCK(ErrorMessageLock);
01301     Terminate(-1);
01302     return(-1);
01303 }
01304

```

```

01305 /*
01306      #] EndSort :
01307      #[ PutIn :          LONG PutIn(handle,position,buffer,take,npat)
01308 */
01324 LONG PutIn(FILEHANDLE *file, POSITION *position, WORD *buffer, WORD **take, int npat)
01325 {
01326     LONG i, RetCode;
01327     WORD *from, *to;
01328     #ifndef WITHZLIB
01329         DUMMYUSE(npat);
01330     #endif
01331     from = buffer + ( file->POsize * sizeof(UBYTE) )/sizeof(WORD);
01332     i = from - *take;
01333     if ( i*((LONG)(sizeof(WORD))) > AM.MaxTer ) {
01334         MLOCK(ErrorMessageLock);
01335         MesPrint("Problems in PutIn");
01336         MUNLOCK(ErrorMessageLock);
01337         Terminate(-1);
01338     }
01339     to = buffer;
01340     while ( --i >= 0 ) ***to = ***from;
01341     *take = to;
01342     #ifndef WITHZLIB
01343     if ( ( RetCode = FillInputGZIP(file,position,(UBYTE *)buffer
01344                                     ,file->POsize,npat) ) < 0 ) {
01345         MLOCK(ErrorMessageLock);
01346         MesPrint("PutIn: We have RetCode = %x while reading %x bytes",
01347                 RetCode,file->POsize);
01348         MUNLOCK(ErrorMessageLock);
01349         Terminate(-1);
01350     }
01351     #else
01352     #ifdef ALLLOCK
01353         LOCK(file->pthreadlock);
01354     #endif
01355     SeekFile(file->handle,position,SEEK_SET);
01356     if ( ( RetCode = ReadFile(file->handle,(UBYTE *)buffer,file->POsize) ) < 0 ) {
01357     #ifdef ALLLOCK
01358         UNLOCK(file->pthreadlock);
01359     #endif
01360         MLOCK(ErrorMessageLock);
01361         MesPrint("PutIn: We have RetCode = %x while reading %x bytes",
01362                 RetCode,file->POsize);
01363         MUNLOCK(ErrorMessageLock);
01364         Terminate(-1);
01365     }
01366     #ifdef ALLLOCK
01367         UNLOCK(file->pthreadlock);
01368     #endif
01369     #endif
01370     return(RetCode);
01371 }
01372
01373 /*
01374      #] PutIn :
01375      #[ Sflush :          WORD Sflush(file)
01376 */
01384 int Sflush(FILEHANDLE *fi)
01385 {
01386     LONG size, RetCode;
01387     #ifndef WITHZLIB
01388         GETIDENTITY
01389         int dobracketindex = 0;
01390         if ( AR.sLevel <= 0 && Expressions[AR.CurExpr].newbracketinfo
01391             && ( fi == AR.outfile || fi == AR.hidefile ) ) dobracketindex = 1;
01392     #endif
01393     if ( fi->handle < 0 ) {
01394         if ( ( RetCode = CreateFile(fi->name) ) >= 0 ) {
01395     #ifdef GZIPDEBUG
01396         MLOCK(ErrorMessageLock);
01397         MesPrint("%w Sflush created scratch file %s",fi->name);
01398         MUNLOCK(ErrorMessageLock);
01399     #endif
01400         fi->handle = (WORD)RetCode;
01401         PUTZERO(fi->filesize);
01402         PUTZERO(fi->POposition);
01403     }
01404     else {
01405         MLOCK(ErrorMessageLock);
01406         MesPrint("Cannot create scratch file %s",fi->name);
01407         MUNLOCK(ErrorMessageLock);
01408         return(-1);
01409     }
01410 }
01411 #ifndef WITHZLIB
01412 if ( AT.SS == AT.S0 && !AR.NoCompress && AR.gzipCompress > 0
01413     && dobracketindex == 0 ) {

```

```

01414         if ( FlushOutputGZIP(fi) ) return(-1);
01415         fi->POfill = fi->PObuffer;
01416     }
01417     else
01418     #endif
01419     {
01420     #ifdef ALLLOCK
01421         LOCK(fi->pthreadlock);
01422     #endif
01423         size = (fi->POfill-fi->PObuffer)*sizeof(WORD);
01424         SeekFile(fi->handle,&(fi->POposition),SEEK_SET);
01425         if ( WriteFile(fi->handle,(UBYTE *) (fi->PObuffer),size) != size ) {
01426     #ifdef ALLLOCK
01427             UNLOCK(fi->pthreadlock);
01428     #endif
01429             MLOCK(ErrorMessageLock);
01430             MesPrint("Write error while finishing sort. Disk full?");
01431             MUNLOCK(ErrorMessageLock);
01432             return(-1);
01433         }
01434         ADDPOS(fi->filesize,size);
01435         ADDPOS(fi->POposition,size);
01436         fi->POfill = fi->PObuffer;
01437     #ifdef ALLLOCK
01438         UNLOCK(fi->pthreadlock);
01439     #endif
01440     }
01441     return(0);
01442 }
01443
01444 /*
01445     #] Sflush :
01446     #[ PutOut :                WORD PutOut(term,position,file,ncomp)
01447 */
01470 WORD PutOut(PHEAD WORD *term, POSITION *position, FILEHANDLE *fi, WORD ncomp)
01471 {
01472     GETBIDENTITY
01473     WORD i, *p, ret, *r, *rr, j, k, first;
01474     int dobracketindex = 0;
01475     LONG RetCode;
01476
01477     if ( AT.SS != AT.SO ) {
01478 /*
01479         For this case no compression should be used
01480 */
01481         if ( ( i = *term ) <= 0 ) return(0);
01482         ret = i;
01483         ADDPOS(*position,i*sizeof(WORD));
01484         p = fi->POfill;
01485         do {
01486             if ( p >= fi->POstop ) {
01487                 if ( fi->handle < 0 ) {
01488                     if ( ( RetCode = CreateFile(fi->name) ) >= 0 ) {
01489     #ifdef GZIPDEBUG
01490                         MLOCK(ErrorMessageLock);
01491                         MesPrint("%w PutOut created sortfile %s",fi->name);
01492                         MUNLOCK(ErrorMessageLock);
01493                     #endif
01494                     fi->handle = (WORD)RetCode;
01495                     PUTZERO(fi->filesize);
01496                     PUTZERO(fi->POposition);
01497 /*
01498                         Should not be here anymore?
01499     #ifdef WITHZLIB
01500                         fi->ziobuffer = 0;
01501                     #endif
01502                     */
01503                 }
01504             }
01505             else {
01506                 MLOCK(ErrorMessageLock);
01507                 MesPrint("Cannot create scratch file %s",fi->name);
01508                 MUNLOCK(ErrorMessageLock);
01509                 return(-1);
01510             }
01511         }
01512     #ifdef ALLLOCK
01513         LOCK(fi->pthreadlock);
01514     #endif
01515         if ( fi == AR.hidefile ) {
01516             LOCK(AS.inputslock);
01517         }
01518         SeekFile(fi->handle,&(fi->POposition),SEEK_SET);
01519         if ( ( RetCode = WriteFile(fi->handle,(UBYTE *) (fi->PObuffer),fi->POsize) ) !=
01520             fi->POsize ) {
01521             if ( fi == AR.hidefile ) {
01522                 UNLOCK(AS.inputslock);
01523             }
01524         }
01525     }

```



```

01522 #ifdef ALLLOCK
01523         UNLOCK(fi->pthreadlock);
01524 #endif
01525         MLOCK(ErrorMessageLock);
01526         MesPrint("Write error during sort. Disk full?");
01527         MesPrint("Attempt to write %l bytes on file %d at position %l5p",
01528                 fi->POsize, fi->handle, &(fi->POposition));
01529         MesPrint("RetCode = %l, Buffer address = %l", RetCode, (LONG) (fi->PObuffer));
01530         MUNLOCK(ErrorMessageLock);
01531         return(-1);
01532     }
01533     ADDPOS(fi->filesize, fi->POsize);
01534     p = fi->PObuffer;
01535     ADDPOS(fi->POposition, fi->POsize);
01536     if ( fi == AR.hidefile ) {
01537         UNLOCK(AS.inputslock);
01538     }
01539 #ifdef ALLLOCK
01540     UNLOCK(fi->pthreadlock);
01541 #endif
01542 #ifdef WITHPTHREADS
01543     if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
01544         if ( fi->handle >= 0 ) SynchFile(fi->handle);
01545     }
01546 #endif
01547     }
01548     *p++ = *term++;
01549     } while ( --i > 0 );
01550     fi->POfull = fi->POfill = p;
01551     return(ret);
01552 }
01553 if ( ( AP.PreDebug & DUMPOUTTERMS ) == DUMPOUTTERMS ) {
01554     MLOCK(ErrorMessageLock);
01555 #ifdef WITHPTHREADS
01556     snprintf((char *) (THRbuf), 100, "PutOut(%d)", AT.identity);
01557     PrintTerm(term, (char *) (THRbuf));
01558 #else
01559     PrintTerm(term, "PutOut");
01560 #endif
01561     MesPrint("ncomp = %d, AR.NoCompress = %d, AR.sLevel = %d", ncomp, AR.NoCompress, AR.sLevel);
01562     MesPrint("File %s, position %p", fi->name, position);
01563     MUNLOCK(ErrorMessageLock);
01564 }
01565
01566 if ( AR.sLevel <= 0 && Expressions[AR.CurExpr].newbracketinfo
01567     && ( fi == AR.outfile || fi == AR.hidefile ) ) dobracketindex = 1;
01568 r = rr = AR.CompressPointer;
01569 first = j = k = ret = 0;
01570 if ( ( i = *term ) != 0 ) {
01571     if ( i < 0 ) { /* Compressed term */
01572         i = term[1] + 2;
01573         if ( fi == AR.outfile || fi == AR.hidefile ) {
01574             MLOCK(ErrorMessageLock);
01575             MesPrint("Ran into precompressed term");
01576             MUNLOCK(ErrorMessageLock);
01577             Crash();
01578             return(-1);
01579         }
01580     }
01581     else if ( !AR.NoCompress && ( ncomp > 0 ) && AR.sLevel <= 0 ) { /* Must compress */
01582         if ( dobracketindex ) {
01583             PutBracketInIndex(BHEAD term, position);
01584         }
01585         j = *r++ - 1;
01586         p = term + 1;
01587         i--;
01588         if ( AR.PolyFun ) {
01589             WORD *polystop, *sa;
01590             sa = p + i;
01591             sa -= ABS(sa[-1]);
01592             polystop = p;
01593             while ( polystop < sa && *polystop != AR.PolyFun ) {
01594                 polystop += polystop[1];
01595             }
01596             if ( polystop < sa ) {
01597                 if ( AR.PolyFunType == 2 ) polystop[2] &= ~MUSTCLEANPRF;
01598                 while ( i > 0 && j > 0 && *p == *r && p < polystop ) {
01599                     i--; j--; k--; p++; r++;
01600                 }
01601             }
01602             else {
01603                 while ( i > 0 && j > 0 && *p == *r && p < sa ) { i--; j--; k--; p++; r++; }
01604             }
01605         }
01606 #ifdef WITHFLOAT
01607         else if ( AC.DefaultPrecision ) {
01608             WORD *floatstop, *sa;

```

```

01609         sa = p + i;
01610         sa -= ABS(sa[-1]);
01611         floatstop = p;
01612         while ( floatstop < sa && *floatstop != FLOATFUN ) {
01613             floatstop += floatstop[1];
01614         }
01615         if ( floatstop < sa ) {
01616             while ( i > 0 && j > 0 && *p == *r && p < floatstop ) {
01617                 i--; j--; k--; p++; r++;
01618             }
01619         }
01620         else {
01621             while ( i > 0 && j > 0 && *p == *r && p < sa ) { i--; j--; k--; p++; r++; }
01622         }
01623     }
01624 #endif
01625     else {
01626         WORD *sa;
01627         sa = p + i;
01628         sa -= ABS(sa[-1]);
01629         while ( i > 0 && j > 0 && *p == *r && p < sa ) { i--; j--; k--; p++; r++; }
01630     }
01631     if ( k > -2 ) {
01632 nocompress:
01633         j = i = *term;
01634         k = 0;
01635         p = term;
01636         r = rr;
01637         NCOPY(r,p,j);
01638     }
01639     else {
01640         *rr = *term;
01641         term = p;
01642         j = i;
01643         NCOPY(r,p,j);
01644         j = i;
01645         i += 2;
01646         first = 2;
01647     }
01648 /*             Sabotage getting into the coefficient next time */
01649     r[-(ABS(r[-1]))] = 0;
01650     if ( r >= AR.ComprTop ) {
01651         MLOCK(ErrorMessageLock);
01652         MesPrint("CompressSize of %10l is insufficient",AM.CompressSize);
01653         MUNLOCK(ErrorMessageLock);
01654         Crash();
01655         return(-1);
01656     }
01657 }
01658 else if ( !AR.NoCompress && ( ncomp < 0 ) && AR.sLevel <= 0 ) {
01659     /* No compress but put in compress buffer anyway */
01660     if ( dobracketindex ) {
01661         PutBracketInIndex(BHEAD term,position);
01662     }
01663     j = *r++ - 1;
01664     p = term + 1;
01665     i--;
01666     if ( AR.PolyFun ) {
01667         WORD *polystop, *sa;
01668         sa = p + i;
01669         sa -= ABS(sa[-1]);
01670         polystop = p;
01671         while ( polystop < sa && *polystop != AR.PolyFun ) {
01672             polystop += polystop[1];
01673         }
01674         if ( polystop < sa ) {
01675             if ( AR.PolyFunType == 2 ) polystop[2] &= ~MUSTCLEANPRF;
01676             while ( i > 0 && j > 0 && *p == *r && p < polystop ) {
01677                 i--; j--; k--; p++; r++;
01678             }
01679         }
01680         else {
01681             while ( i > 0 && j > 0 && *p == *r ) { i--; j--; k--; p++; r++; }
01682         }
01683     }
01684     else {
01685         while ( i > 0 && j > 0 && *p == *r ) { i--; j--; k--; p++; r++; }
01686     }
01687     goto nocompress;
01688 }
01689 else {
01690     if ( AR.PolyFunType == 2 ) {
01691         WORD *t, *tstop;
01692         tstop = term + *term;
01693         tstop -= ABS(tstop[-1]);
01694         t = term+1;
01695         while ( t < tstop ) {

```

```

01696             if ( *t == AR.PolyFun ) {
01697                 t[2] &= ~MUSTCLEANPRF;
01698             }
01699             t += t[1];
01700         }
01701     }
01702     if ( dobracketindex ) {
01703         PutBracketInIndex(BHEAD term,position);
01704     }
01705 }
01706 ret = i;
01707 ADDPOS(*position,i*sizeof(WORD));
01708 p = fi->POfill;
01709 do {
01710     if ( p >= fi->POstop ) {
01711 #ifdef WITHMPI /* [16mar1998 ar] */
01712         if ( PF.me != MASTER && AR.sLevel <= 0 && (fi == AR.outfile || fi == AR.hidefile) &&
PF.parallel && PF.exprtodo < 0 ) {
01713             PF_BUFFER *sbuf = PF.sbuf;
01714             sbuf->fill[sbuf->active] = fi->POstop;
01715             PF_ISendSbuf(MASTER,PF_BUFFER_MSGTAG);
01716             p = fi->PObuffer = fi->POfill = fi->POfull =
sbuf->buff[sbuf->active];
01717             fi->POstop = sbuf->stop[sbuf->active];
01718         }
01719     }
01720     else
01721 #endif /* WITHMPI [16mar1998 ar] */
01722     {
01723         if ( fi->handle < 0 ) {
01724             if ( ( RetCode = CreateFile(fi->name) ) >= 0 ) {
01725 #ifdef GZIPDEBUG
01726                 MLOCK(ErrorMessageLock);
01727                 MesPrint("%w PutOut created sortfile %s",fi->name);
01728                 MUNLOCK(ErrorMessageLock);
01729 #endif
01730                 fi->handle = (WORD)RetCode;
01731                 PUTZERO(fi->filesize);
01732                 PUTZERO(fi->POposition);
01733             }
01734             /*
01735             Should not be here?
01736             fi->ziobuffer = 0;
01737             */
01738         }
01739         else {
01740             MLOCK(ErrorMessageLock);
01741             MesPrint("Cannot create scratch file %s",fi->name);
01742             MUNLOCK(ErrorMessageLock);
01743             return(-1);
01744         }
01745     }
01746 }
01747 #ifdef WITHZLIB
01748 if ( !AR.NoCompress && ncomp > 0 && AR.gzipCompress > 0
&& dobracketindex == 0 && fi->zsp != 0 ) {
01749     fi->POfill = p;
01750     if ( PutOutputGZIP(fi) ) return(-1);
01751     p = fi->PObuffer;
01752 }
01753 else
01754 #endif
01755 {
01756     #ifdef ALLLOCK
01757     LOCK(fi->pthreadlock);
01758     #endif
01759     if ( fi == AR.hidefile ) {
01760         LOCK(AS.inputslock);
01761     }
01762     SeekFile(fi->handle,&(fi->POposition),SEEK_SET);
01763     if ( ( RetCode = WriteFile(fi->handle,(UBYTE *) (fi->PObuffer),fi->POsize) ) !=
fi->POsize ) {
01764         if ( fi == AR.hidefile ) {
01765             UNLOCK(AS.inputslock);
01766         }
01767         #ifdef ALLLOCK
01768         UNLOCK(fi->pthreadlock);
01769         #endif
01770         MLOCK(ErrorMessageLock);
01771         MesPrint("Write error during sort. Disk full?");
01772         MesPrint("Attempt to write %l bytes on file %d at position %l5p",
fi->POsize,fi->handle,&(fi->POposition));
01773         MesPrint("RetCode = %l, Buffer address = %l",RetCode,(LONG) (fi->PObuffer));
01774         MUNLOCK(ErrorMessageLock);
01775         return(-1);
01776     }
01777     ADDPOS(fi->filesize,fi->POsize);
01778     p = fi->PObuffer;
01779 }
01780

```

```

01781                ADDPOS(fi->POposition,fi->POsize);
01782                if ( fi == AR.hidefile ) {
01783                    UNLOCK(AS.inputslock);
01784                }
01785 #ifdef ALLLOCK
01786                UNLOCK(fi->pthreadlock);
01787 #endif
01788 #ifdef WITHPTHREADS
01789                if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
01790                    if ( fi->handle >= 0 ) SynchFile(fi->handle);
01791                }
01792 #endif
01793            }
01794        }
01795    }
01796    if ( first ) {
01797        if ( first == 2 ) *p++ = k;
01798        else *p++ = j;
01799        first--;
01800    }
01801    else *p++ = *term++;
01802 /*
01803     if ( AP.DebugFlag ) {
01804         TalToLine((UWORD) (p[-1])); TokenToLine((UBYTE *) " ");
01805     }
01806 */
01807    } while ( --i > 0 );
01808    fi->POfull = fi->POfill = p;
01809 }
01810 /*
01811     if ( AP.DebugFlag ) {
01812         AO.OutSkip = 0;
01813         FiniLine();
01814     }
01815 */
01816     return(ret);
01817 }
01818
01819 /*
01820     #] PutOut :
01821     #[ FlushOut :                WORD FlushOut(position,file,compr)
01822 */
01832 int FlushOut(POSITION *position, FILEHANDLE *fi, int compr)
01833 {
01834     GETIDENTITY
01835     LONG size, RetCode;
01836     int dobracketindex = 0;
01837 #ifndef WITHZLIB
01838     DUMMYUSE(compr);
01839 #endif
01840     if ( AR.sLevel <= 0 && Expressions[AR.CurExpr].newbracketinfo
01841         && ( fi == AR.outfile || fi == AR.hidefile ) ) dobracketindex = 1;
01842 #ifndef WITHMPI /* [16mar1998 ar] */
01843     if ( PF.me != MASTER && AR.sLevel <= 0 && (fi == AR.outfile || fi == AR.hidefile) && PF.parallel
01844         && PF.exp Prado < 0 ) {
01845         PF_BUFFER *sbuf = PF.sbuf;
01846         if ( fi->POfill >= fi->POstop ){
01847             sbuf->fill[sbuf->active] = fi->POstop;
01848             PF_ISendSbuf(MASTER,PF_BUFFER_MSTAG);
01849             fi->POfull = fi->POfill = fi->PObuffer = sbuf->buff[sbuf->active];
01850             fi->POstop = sbuf->stop[sbuf->active];
01851         }
01852         *(fi->POfill)++ = 0;
01853         sbuf->fill[sbuf->active] = fi->POfill;
01854         PF_ISendSbuf(MASTER,PF_ENDBUFFER_MSTAG);
01855         fi->PObuffer = fi->POfill = fi->POfull = sbuf->buff[sbuf->active];
01856         fi->POstop = sbuf->stop[sbuf->active];
01857         return(0);
01858     }
01859 #endif /* WITHMPI [16mar1998 ar] */
01860     if ( fi->POfill >= fi->POstop ) {
01861         if ( fi->handle < 0 ) {
01862             if ( ( RetCode = CreateFile(fi->name) ) >= 0 ) {
01863 #ifdef GZIPDEBUG
01864                 MLOCK(ErrorMessageLock);
01865                 MesPrint("%w FlushOut created scratch file %s",fi->name);
01866                 MUNLOCK(ErrorMessageLock);
01867 #endif
01868                 PUTZERO(fi->filesize);
01869                 PUTZERO(fi->POposition);
01870                 fi->handle = (WORD)RetCode;
01871             }
01872             Should not be here?
01873             fi->ziobuffer = 0;
01874         }
01875     }

```

```

01876         }
01877         else {
01878             MLOCK(ErrorMessageLock);
01879             MesPrint("Cannot create scratch file %s",fi->name);
01880             MUNLOCK(ErrorMessageLock);
01881             return(-1);
01882         }
01883     }
01884 #ifdef WITHZLIB
01885     if ( AT.SS == AT.S0 && !AR.NoCompress && AR.gzipCompress > 0
01886         && dobracketindex == 0 && ( compr > 0 ) && fi->zsp != 0 ) {
01887         if ( PutOutputGZIP(fi) ) return(-1);
01888         fi->POfill = fi->PObuffer;
01889     }
01890     else
01891 #endif
01892     {
01893 #ifdef ALLLOCK
01894         LOCK(fi->pthreadlock);
01895 #endif
01896         if ( fi == AR.hidefile ) {
01897             LOCK(AS.inputslock);
01898         }
01899         SeekFile(fi->handle,&(fi->POposition),SEEK_SET);
01900         if ( ( RetCode = WriteFile(fi->handle,(UBYTE *) (fi->PObuffer),fi->POsize) ) != fi->POsize )
01901         {
01902 #ifdef ALLLOCK
01903             UNLOCK(fi->pthreadlock);
01904 #endif
01905             if ( fi == AR.hidefile ) {
01906                 UNLOCK(AS.inputslock);
01907             }
01908             MLOCK(ErrorMessageLock);
01909             MesPrint("Write error while sorting. Disk full?");
01910             MesPrint("Attempt to write %l bytes on file %d at position %l5p",
01911                 fi->POsize,fi->handle,&(fi->POposition));
01912             MesPrint("RetCode = %l, Buffer address = %l",RetCode,(LONG) (fi->PObuffer));
01913             MUNLOCK(ErrorMessageLock);
01914             return(-1);
01915         }
01916         ADDPOS(fi->filesize,fi->POsize);
01917         fi->POfill = fi->PObuffer;
01918         ADDPOS(fi->POposition,fi->POsize);
01919         if ( fi == AR.hidefile ) {
01920             UNLOCK(AS.inputslock);
01921         }
01922 #ifdef ALLLOCK
01923         UNLOCK(fi->pthreadlock);
01924 #endif
01925 #ifdef WITHPTHREADS
01926         if ( AS.MasterSort && AC.ThreadSortFileSynch && fi != AR.hidefile ) {
01927             if ( fi->handle >= 0 ) SynchFile(fi->handle);
01928         }
01929     }
01930     *(fi->POfill)++ = 0;
01931     fi->POfull = fi->POfill;
01932     /*
01933     {
01934         UBYTE OutBuf[140];
01935         if ( AP.DebugFlag ) {
01936             AO.OutFill = AO.OutputLine = OutBuf;
01937             AO.OutSkip = 3;
01938             FiniLine();
01939             TokenToLine((UBYTE *) "End of expression written");
01940             FiniLine();
01941         }
01942     }
01943 */
01944     size = (fi->POfill-fi->PObuffer)*sizeof(WORD);
01945     if ( fi->handle >= 0 ) {
01946 #ifdef WITHZLIB
01947         if ( AT.SS == AT.S0 && !AR.NoCompress && AR.gzipCompress > 0
01948             && dobracketindex == 0 && ( compr > 0 ) && fi->zsp != 0 ) {
01949             if ( FlushOutputGZIP(fi) ) return(-1);
01950             fi->POfill = fi->PObuffer;
01951         }
01952         else
01953 #endif
01954     {
01955 #ifdef ALLLOCK
01956         LOCK(fi->pthreadlock);
01957 #endif
01958         if ( fi == AR.hidefile ) {
01959             LOCK(AS.inputslock);
01960         }
01961     }

```

```

01962         SeekFile(fi->handle,&(fi->PPosition),SEEK_SET);
01963  /*
01964         MesPrint("FlushOut: writing %l bytes to position %l2p",size,&(fi->PPosition));
01965  */
01966         if ( ( RetCode = WriteFile(fi->handle,(UBYTE *) (fi->PObuffer),size) ) != size ) {
01967 #ifdef ALLLOCK
01968             UNLOCK(fi->pthreadlock);
01969 #endif
01970             if ( fi == AR.hidefile ) {
01971                 UNLOCK(AS.inputslock);
01972             }
01973             MLOCK(ErrorMessageLock);
01974             MesPrint("Write error while finishing sorting. Disk full?");
01975             MesPrint("Attempt to write %l bytes on file %d at position %l5p",
01976                 size,fi->handle,&(fi->PPosition));
01977             MesPrint("RetCode = %l, Buffer address = %l",RetCode,(LONG) (fi->PObuffer));
01978             MUNLOCK(ErrorMessageLock);
01979             return(-1);
01980         }
01981         ADDPOS(fi->filesize,size);
01982         ADDPOS(fi->PPosition,size);
01983         fi->POfill = fi->PObuffer;
01984         if ( fi == AR.hidefile ) {
01985             UNLOCK(AS.inputslock);
01986         }
01987 #ifdef ALLLOCK
01988         UNLOCK(fi->pthreadlock);
01989 #endif
01990 #ifdef WITHPTHREADS
01991         if ( AS.MasterSort && AC.ThreadSortFileSynch ) {
01992             if ( fi->handle >= 0 ) SynchFile(fi->handle);
01993         }
01994 #endif
01995     }
01996     if ( dobracketindex ) {
01997         BRACKETINFO *b = Expressions[AR.CurExpr].newbracketinfo;
01998         if ( b->indexfill > 0 ) {
02000             DIFPOS(b->indexbuffer[b->indexfill-1].next,*position,Expressions[AR.CurExpr].onfile);
02001         }
02002     }
02003 #ifdef WITHZLIB
02004     if ( AT.SS == AT.S0 && !AR.NoCompress && AR.gzipCompress > 0
02005         && dobracketindex == 0 && ( compr > 0 ) && fi->zsp != 0 ) {
02006         PUTZERO(*position);
02007         if ( fi->handle >= 0 ) {
02008 #ifdef ALLLOCK
02009             LOCK(fi->pthreadlock);
02010 #endif
02011             SeekFile(fi->handle,position,SEEK_END);
02012 #ifdef ALLLOCK
02013             UNLOCK(fi->pthreadlock);
02014 #endif
02015         }
02016         else {
02017             ADDPOS(*position,((UBYTE *) fi->POfill-(UBYTE *) fi->PObuffer));
02018         }
02019     }
02020     else
02021 #endif
02022     {
02023         ADDPOS(*position,sizeof(WORD));
02024     }
02025     return(0);
02026 }
02027
02028 /*
02029     #] FlushOut :
02030     #[ AddCoef :                WORD AddCoef(pterm1,pterm2)
02031 */
02046 int AddCoef(PHEAD WORD **ps1, WORD **ps2)
02047 {
02048     GETBIDENTITY
02049     SORTING *S = AT.SS;
02050     WORD *s1, *s2;
02051     WORD l1, l2, i;
02052     WORD OutLen, *t, j;
02053     UWORD *OutCoef;
02054 #ifdef WITHFLOAT
02055     if ( AT.SortFloatMode ) return(AddWithFloat(BHEAD ps1,ps2));
02056 #endif
02057     OutCoef = AN.SoScratC;
02058     s1 = *ps1; s2 = *ps2;
02059     GETCOEF(s1,l1);
02060     GETCOEF(s2,l2);
02061     if ( AddRat(BHEAD (UWORD *)s1,l1,(UWORD *)s2,l2,OutCoef,&OutLen) ) {
02062         MLOCK(ErrorMessageLock);

```

```

02063     MesCall("AddCoef");
02064     MUNLOCK(ErrorMessageLock);
02065     Terminate(-1);
02066 }
02067 if ( AN.ncmod != 0 ) {
02068     if ( ( AC.modmode & POSNEG ) != 0 ) {
02069         NormalModulus(OutCoef,&OutLen);
02070     /*
02071         We had forgotten that this can also become smaller but the
02072         denominator isn't there. Correct in the other case
02073         17-may-2009 [JV]
02074     */
02075         j = ABS(OutLen); OutCoef[j] = 1;
02076         for ( i = 1; i < j; i++ ) OutCoef[j+i] = 0;
02077     }
02078     else if ( BigLong(OutCoef,OutLen,(UWORD *)AC.cmod,ABS(AN.ncmod)) >= 0 ) {
02079         SubPLon(OutCoef,OutLen,(UWORD *)AC.cmod,ABS(AN.ncmod),OutCoef,&OutLen);
02080         OutCoef[OutLen] = 1;
02081         for ( i = 1; i < OutLen; i++ ) OutCoef[OutLen+i] = 0;
02082     }
02083 }
02084 if ( !OutLen ) { *ps1 = *ps2 = 0; return(0); }
02085 OutLen *= 2;
02086 if ( OutLen < 0 ) i = - ( --OutLen );
02087 else i = ++OutLen;
02088 if ( l1 < 0 ) l1 = -l1;
02089 l1 *= 2; l1++;
02090 if ( i <= l1 ) { /* Fits in 1 */
02091     l1 -= i;
02092     **ps1 -= l1;
02093     s2 = (WORD *)OutCoef;
02094     while ( --i > 0 ) *s1++ = *s2++;
02095     *s1++ = OutLen;
02096     while ( --l1 >= 0 ) *s1++ = 0;
02097     goto RegEnd;
02098 }
02099 if ( l2 < 0 ) l2 = -l2;
02100 l2 *= 2; l2++;
02101 if ( i <= l2 ) { /* Fits in 2 */
02102     l2 -= i;
02103     **ps2 -= l2;
02104     s1 = (WORD *)OutCoef;
02105     while ( --i > 0 ) *s2++ = *s1++;
02106     *s2++ = OutLen;
02107     while ( --l2 >= 0 ) *s2++ = 0;
02108     *ps1 = *ps2;
02109     goto RegEnd;
02110 }
02111
02112 /* Doesn't fit. Make a new term. */
02113
02114 t = s1;
02115 s1 = *ps1;
02116 j = *s1++ + i - l1; /* Space needed */
02117 if ( (S->sFill + j) >= S->sTop2 ) {
02118     GarbHand();
02119     s1 = *ps1;
02120     t = s1 + *s1 - 1;
02121     j = *s1++ + i - l1; /* Space needed */
02122     l1 = *t;
02123     if ( l1 < 0 ) l1 = - l1;
02124     t -= l1-1;
02125 }
02126 s2 = S->sFill;
02127 *s2++ = j;
02128 while ( s1 < t ) *s2++ = *s1++;
02129 s1 = (WORD *)OutCoef;
02130 while ( --i > 0 ) *s2++ = *s1++;
02131 *s2++ = OutLen;
02132 *ps1 = S->sFill;
02133 S->sFill = s2;
02134 RegEnd:
02135 *ps2 = 0;
02136 if ( **ps1 > AM.MaxTer/((LONG)(sizeof(WORD))) ) {
02137     MLOCK(ErrorMessageLock);
02138     MesPrint("Term too complex after addition in sort. MaxTermSize = %10l",
02139         AM.MaxTer/sizeof(WORD));
02139     MUNLOCK(ErrorMessageLock);
02140     Terminate(-1);
02141 }
02142 }
02143 return(1);
02144 }
02145
02146 /*
02147     #] AddCoef :
02148     #[ AddPoly : WORD AddPoly(pterm1,pterm2)
02149 */

```

```

02175 int AddPoly(PHEAD WORD **ps1, WORD **ps2)
02176 {
02177     GETBIDENTITY
02178     SORTING *S = AT.SS;
02179     WORD i;
02180     WORD *s1, *s2, *m, *w, *t, oldpw = S->PolyWise;
02181     s1 = *ps1 + S->PolyWise;
02182     s2 = *ps2 + S->PolyWise;
02183     w = AT.WorkPointer;
02184     /*
02185     Add here the two arguments. Is a straight merge.
02186     */
02187     if ( S->PolyFlag == 2 && AR.PolyFunExp != 2 && AR.PolyFunExp != 3 ) {
02188         WORD **oldSplitScratch = AN.SplitScratch;
02189         LONG oldSplitScratchSize = AN.SplitScratchSize;
02190         LONG oldInScratch = AN.InScratch;
02191         WORD oldtype = AR.SortType;
02192         if ( (WORD *) ((UBYTE *)w + AM.MaxTer) >= AT.WorkTop ) {
02193             MLOCK(ErrorMessageLock);
02194             MesPrint("Program was adding polyratfun arguments");
02195             MesWork();
02196             MUNLOCK(ErrorMessageLock);
02197         }
02198         AR.SortType = SORTHIGHFIRST;
02199         S->PolyWise = 0;
02200         AN.SplitScratch = AN.SplitScratch1;
02201         AN.SplitScratchSize = AN.SplitScratchSize1;
02202         AN.InScratch = AN.InScratch1;
02203         poly_ratfun_add(BHEAD s1,s2);
02204         S->PolyWise = oldpw;
02205         AN.SplitScratch1 = AN.SplitScratch;
02206         AN.SplitScratchSize1 = AN.SplitScratchSize;
02207         AN.InScratch1 = AN.InScratch;
02208         AN.SplitScratch = oldSplitScratch;
02209         AN.SplitScratchSize = oldSplitScratchSize;
02210         AN.InScratch = oldInScratch;
02211         AT.WorkPointer = w;
02212         AR.SortType = oldtype;
02213         if ( w[1] <= FUNHEAD ||
02214             ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 ) ) {
02215             *ps1 = *ps2 = 0; return(0);
02216         }
02217     }
02218     else {
02219         if ( w + s1[1] + s2[1] + 12 + ARGHEAD >= AT.WorkTop ) {
02220             MLOCK(ErrorMessageLock);
02221             MesPrint("Program was adding polyfun arguments");
02222             MesWork();
02223             MUNLOCK(ErrorMessageLock);
02224         }
02225         AddArgs(BHEAD s1,s2,w);
02226     }
02227     /*
02228     Now we need to store the result in a convenient place.
02229     */
02230     if ( w[1] <= FUNHEAD ) { *ps1 = *ps2 = 0; return(0); }
02231     if ( w[1] <= s1[1] || w[1] <= s2[1] ) { /* Fits in place. */
02232         if ( w[1] > s1[1] ) {
02233             *ps1 = *ps2;
02234             s1 = s2;
02235         }
02236         t = s1 + s1[1];
02237         m = *ps1 + **ps1;
02238         i = w[1];
02239         NCOPY(s1,w,i);
02240         if ( s1 != t ) {
02241             while ( t < m ) *s1++ = *t++;
02242             **ps1 = WORDDIF(s1,(*ps1));
02243         }
02244         *ps2 = 0;
02245     }
02246     else { /* Make new term */
02247 #ifdef TESTGARB
02248         s2 = *ps2;
02249 #endif
02250         *ps2 = 0;
02251         if ( (S->sFill + (**ps1 + w[1] - s1[1])) >= S->sTop2 ) {
02252 #ifdef TESTGARB
02253             MesPrint("-----Garbage collection-----");
02254 #endif
02255             AT.WorkPointer += w[1];
02256             GarbHand();
02257             AT.WorkPointer = w;
02258             s1 = *ps1;
02259             if ( (S->sFill + (**ps1 + w[1] - s1[1])) >= S->sTop2 ) {
02260 #ifdef TESTGARB
02261                 UBYTE OutBuf[140];

```



```

02262         MLOCK(ErrorMessageLock);
02263         AO.OutFill = AO.OutputLine = OutBuf;
02264         AO.OutSkip = 3;
02265         FiniLine();
02266         i = *s2;
02267         while ( --i >= 0 ) {
02268             TalToLine((UWORD) (*s2++)); TokenToLine((UBYTE *) " ");
02269         }
02270         FiniLine();
02271         AO.OutFill = AO.OutputLine = OutBuf;
02272         AO.OutSkip = 3;
02273         FiniLine();
02274         s2 = *ps1;
02275         i = *s2;
02276         while ( --i >= 0 ) {
02277             TalToLine((UWORD) (*s2++)); TokenToLine((UBYTE *) " ");
02278         }
02279         FiniLine();
02280         AO.OutFill = AO.OutputLine = OutBuf;
02281         AO.OutSkip = 3;
02282         FiniLine();
02283         s2 = w;
02284         i = w[1];
02285         while ( --i >= 0 ) {
02286             TalToLine((UWORD) (*s2++)); TokenToLine((UBYTE *) " ");
02287         }
02288         FiniLine();
02289         if ( AR.sLevel > 0 ) {
02290             MesPrint("Please increase SubSmallExtension setup parameter.");
02291         }
02292         else {
02293             MesPrint("Please increase SmallExtension setup parameter.");
02294         }
02295         MUNLOCK(ErrorMessageLock);
02296     #else
02297         MLOCK(ErrorMessageLock);
02298         if ( AR.sLevel > 0 ) {
02299             MesPrint("Please increase SubSmallExtension setup parameter.");
02300         }
02301         else {
02302             MesPrint("Please increase SmallExtension setup parameter.");
02303         }
02304         MUNLOCK(ErrorMessageLock);
02305     #endif
02306     Terminate(-1);
02307 }
02308 }
02309 t = *ps1;
02310 s2 = S->sFill;
02311 m = s2;
02312 i = S->PolyWise;
02313 NCOPY(s2,t,i);
02314 i = w[1];
02315 NCOPY(s2,w,i);
02316 t = t + t[1];
02317 w = *ps1 + **ps1;
02318 while ( t < w ) *s2++ = *t++;
02319 *m = WORDDIF(s2,m);
02320 *ps1 = m;
02321 S->sFill = s2;
02322 if ( *m > AM.MaxTer/((LONG) sizeof(WORD)) ) {
02323     MLOCK(ErrorMessageLock);
02324     MesPrint("Term too complex after polynomial addition. MaxTermSize = %10l",
02325             AM.MaxTer/sizeof(WORD));
02326     MUNLOCK(ErrorMessageLock);
02327     Terminate(-1);
02328 }
02329 }
02330 return(1);
02331 }
02332
02333 /*
02334     #] AddPoly :
02335     #[ AddArgs :          void AddArgs(arg1,arg2,to)
02336 */
02337
02338 #define INSLLENGTH(x)  w[1] = FUNHEAD+ARGHEAD+x; w[FUNHEAD] = ARGHEAD+x;
02339
02340 void AddArgs(PHEAD WORD *s1, WORD *s2, WORD *m)
02341 {
02342     GETBIDENTITY
02343     WORD i1, i2;
02344     WORD *w = m, *mm, *t, *t1, *t2, *tstop1, *tstop2;
02345     WORD tempterm[8+FUNHEAD];
02346
02347     *m++ = AR.PolyFun; *m++ = 0; FILLFUN(m)
02348     *m++ = 0; *m++ = 0; FILLARG(m)

```

```

02356     if ( s1[FUNHEAD] < 0 || s2[FUNHEAD] < 0 ) {
02357         if ( s1[FUNHEAD] < 0 ) {
02358             if ( s2[FUNHEAD] < 0 ) { /* Both are special */
02359                 if ( s1[FUNHEAD] <= -FUNCTION ) {
02360                     if ( s2[FUNHEAD] == s1[FUNHEAD] ) {
02361                         *m++ = 4+FUNHEAD; *m++ = -s1[FUNHEAD]; *m++ = FUNHEAD;
02362                         FILLFUN(m)
02363                         *m++ = 2; *m++ = 1; *m++ = 3;
02364                         INSLLENGTH(4+FUNHEAD)
02365                     }
02366                 else if ( s2[FUNHEAD] <= -FUNCTION ) {
02367                     i1 = functions[-FUNCTION-s1[FUNHEAD]].commute != 0;
02368                     i2 = functions[-FUNCTION-s2[FUNHEAD]].commute != 0;
02369                     if ( ( !i1 && i2 ) || ( i1 == i2 && i1 > i2 ) ) {
02370                         i1 = s2[FUNHEAD];
02371                         s2[FUNHEAD] = s1[FUNHEAD];
02372                         s1[FUNHEAD] = i1;
02373                     }
02374                     *m++ = 4+FUNHEAD; *m++ = -s1[FUNHEAD]; *m++ = FUNHEAD;
02375                     FILLFUN(m)
02376                     *m++ = 1; *m++ = 1; *m++ = 3;
02377                     *m++ = 4+FUNHEAD; *m++ = -s2[FUNHEAD]; *m++ = FUNHEAD;
02378                     FILLFUN(m)
02379                     *m++ = 1; *m++ = 1; *m++ = 3;
02380                     INSLLENGTH(8+2*FUNHEAD)
02381                 }
02382             else if ( s2[FUNHEAD] == -SYMBOL ) {
02383                 *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = s2[FUNHEAD+1]; *m++ = 1;
02384                 *m++ = 1; *m++ = 1; *m++ = 3;
02385                 *m++ = 4+FUNHEAD; *m++ = -s1[FUNHEAD]; *m++ = FUNHEAD;
02386                 FILLFUN(m)
02387                 *m++ = 1; *m++ = 1; *m++ = 3;
02388                 INSLLENGTH(12+FUNHEAD)
02389             }
02390         else { /* number */
02391             *m++ = 4;
02392             *m++ = ABS(s2[FUNHEAD+1]); *m++ = 1; *m++ = s2[FUNHEAD+1] < 0 ? -3: 3;
02393             *m++ = 4+FUNHEAD; *m++ = -s1[FUNHEAD]; *m++ = FUNHEAD;
02394             FILLFUN(m)
02395             *m++ = 1; *m++ = 1; *m++ = 3;
02396             INSLLENGTH(8+FUNHEAD)
02397         }
02398     }
02399     else if ( s1[FUNHEAD] == -SYMBOL ) {
02400         if ( s2[FUNHEAD] == s1[FUNHEAD] ) {
02401             if ( s1[FUNHEAD+1] == s2[FUNHEAD+1] ) {
02402                 *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = s1[FUNHEAD+1];
02403                 *m++ = 1; *m++ = 2; *m++ = 1; *m++ = 3;
02404                 INSLLENGTH(8)
02405             }
02406         else {
02407             if ( s1[FUNHEAD+1] > s2[FUNHEAD+1] )
02408                 { i1 = s2[FUNHEAD+1]; i2 = s1[FUNHEAD+1]; }
02409             else { i1 = s1[FUNHEAD+1]; i2 = s2[FUNHEAD+1]; }
02410             *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = i1;
02411             *m++ = 1; *m++ = 1; *m++ = 1; *m++ = 3;
02412             *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = i2;
02413             *m++ = 1; *m++ = 1; *m++ = 1; *m++ = 3;
02414             INSLLENGTH(16)
02415         }
02416     }
02417     else if ( s2[FUNHEAD] <= -FUNCTION ) {
02418         *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = s1[FUNHEAD+1]; *m++ = 1;
02419         *m++ = 1; *m++ = 1; *m++ = 3;
02420         *m++ = 4+FUNHEAD; *m++ = -s2[FUNHEAD]; *m++ = FUNHEAD;
02421         FILLFUN(m)
02422         *m++ = 1; *m++ = 1; *m++ = 3;
02423         INSLLENGTH(12+FUNHEAD)
02424     }
02425     else {
02426         *m++ = 4;
02427         *m++ = ABS(s2[FUNHEAD+1]); *m++ = 1; *m++ = s2[FUNHEAD+1] < 0 ? -3: 3;
02428         *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = s1[FUNHEAD+1]; *m++ = 1;
02429         *m++ = 1; *m++ = 1; *m++ = 3;
02430         INSLLENGTH(12)
02431     }
02432 }
02433 else { /* Must be -SNUMBER! */
02434     if ( s2[FUNHEAD] <= -FUNCTION ) {
02435         *m++ = 4;
02436         *m++ = ABS(s1[FUNHEAD+1]); *m++ = 1; *m++ = s1[FUNHEAD+1] < 0 ? -3: 3;
02437         *m++ = 4+FUNHEAD; *m++ = -s2[FUNHEAD]; *m++ = FUNHEAD;
02438         FILLFUN(m)
02439         *m++ = 1; *m++ = 1; *m++ = 3;
02440         INSLLENGTH(8+FUNHEAD)
02441     }
02442     else if ( s2[FUNHEAD] == -SYMBOL ) {

```

```

02443         *m++ = 4;
02444         *m++ = ABS(s1[FUNHEAD+1]); *m++ = 1; *m++ = s1[FUNHEAD+1] < 0 ? -3: 3;
02445         *m++ = 8; *m++ = SYMBOL; *m++ = 4; *m++ = s2[FUNHEAD+1]; *m++ = 1;
02446         *m++ = 1; *m++ = 1; *m++ = 3;
02447         INSLENGTH(12)
02448     }
02449     else { /* Both are numbers. add. */
02450         LONG x1;
02451         x1 = (LONG)s1[FUNHEAD+1] + (LONG)s2[FUNHEAD+1];
02452         if ( x1 < 0 ) { i1 = (WORD)(-x1); i2 = -3; }
02453         else { i1 = (WORD)x1; i2 = 3; }
02454         if ( x1 && AN.ncmod != 0 ) {
02455             m[0] = 4;
02456             m[1] = i1;
02457             m[2] = 1;
02458             m[3] = i2;
02459             if ( Modulus(m) ) Terminate(-1);
02460             if ( *m == 0 ) w[1] = 0;
02461             else {
02462                 if ( *m == 4 && ( m[1] & MAXPOSITIVE ) == m[1]
02463                     && m[3] == 3 ) {
02464                     i1 = m[1];
02465                     m -= ARGHEAD;
02466                     *m++ = -SNUMBER;
02467                     *m++ = i1;
02468                     INSLENGTH(4)
02469                 }
02470                 else {
02471                     INSLENGTH(*m)
02472                     m += *m;
02473                 }
02474             }
02475         }
02476     else {
02477         if ( x1 == 0 ) {
02478             w[1] = FUNHEAD;
02479         }
02480         else if ( ( i1 & MAXPOSITIVE ) == i1 ) {
02481             m -= ARGHEAD;
02482             *m++ = -SNUMBER;
02483             *m++ = (WORD)x1;
02484             w[1] = FUNHEAD+2;
02485         }
02486         else {
02487             *m++ = 4; *m++ = i1; *m++ = 1; *m++ = i2;
02488             INSLENGTH(4)
02489         }
02490     }
02491 }
02492 }
02493 }
02494 else { /* Only s1 is special */
02495 slonly:
02496 /*
02497     Compose a term in `tempterm'
02498 */
02499     t = tempterm;
02500     if ( s1[FUNHEAD] <= -FUNCTION ) {
02501         *t++ = 4+FUNHEAD; *t++ = -s1[FUNHEAD]; *t++ = FUNHEAD;
02502         FILLFUN(t)
02503         *t++ = 1; *t++ = 1; *t++ = 3;
02504     }
02505     else if ( s1[FUNHEAD] == -SYMBOL ) {
02506         *t++ = 8; *t++ = SYMBOL; *t++ = 4;
02507         *t++ = s1[FUNHEAD+1]; *t++ = 1;
02508         *t++ = 1; *t++ = 1; *t++ = 3;
02509     }
02510     else {
02511         *t++ = 4; *t++ = ABS(s1[FUNHEAD+1]);
02512         *t++ = 1; *t++ = s1[FUNHEAD+1] < 0 ? -3: 3;
02513     }
02514     tstop1 = t;
02515     s1 = tempterm;
02516     goto twogen;
02517 }
02518 }
02519 else { /* Only s2 is special */
02520     t = s1;
02521     s1 = s2;
02522     s2 = t;
02523     goto slonly;
02524 }
02525 }
02526 else {
02527     int oldPolyFlag;
02528     tstop1 = s1 + s1[1];
02529     s1 += FUNHEAD+ARGHEAD;

```

```

02530 twogen:
02531     tstop2 = s2 + s2[1];
02532     s2 += FUNHEAD+ARGHEAD;
02533 /*
02534     Now we should merge the expressions in s1 and s2 into m.
02535 */
02536     oldPolyFlag = AT.SS->PolyFlag;
02537     AT.SS->PolyFlag = 0;
02538     while ( s1 < tstop1 && s2 < tstop2 ) {
02539         i1 = CompareTerms(BHEAD s1,s2,(WORD) (-1));
02540         if ( i1 > 0 ) {
02541             i2 = *s1;
02542             NCOPY(m,s1,i2);
02543         }
02544         else if ( i1 < 0 ) {
02545             i2 = *s2;
02546             NCOPY(m,s2,i2);
02547         }
02548         else { /* Coefficients should be added. */
02549             WORD i;
02550             t = s1+*s1;
02551             i1 = t[-1];
02552             i2 = *s1 - ABS(i1);
02553             t2 = s2 + i2;
02554             s2 += *s2;
02555             mm = m;
02556             NCOPY(m,s1,i2);
02557             t1 = s1;
02558             s1 = t;
02559             i2 = s2[-1];
02560 /*
02561             t1,i1 is the first coefficient
02562             t2,i2 is the second coefficient
02563             It should be placed at m,i1
02564 */
02565             i1 = REDLENG(i1);
02566             i2 = REDLENG(i2);
02567             if ( AddRat(BHEAD (UWORD *)t1,i1,(UWORD *)t2,i2,(UWORD *)m,&i) ) {
02568                 MLOCK(ErrorMessageLock);
02569                 MesPrint("Addition of coefficients of PolyFun");
02570                 MUNLOCK(ErrorMessageLock);
02571                 Terminate(-1);
02572             }
02573             if ( i == 0 ) {
02574                 m = mm;
02575             }
02576             else {
02577                 i1 = INCLENG(i);
02578                 m += ABS(i1);
02579                 m[-1] = i1;
02580                 *mm = WORDDIF(m,mm);
02581                 if ( AN.ncmod != 0 ) {
02582                     if ( Modulus(mm) ) Terminate(-1);
02583                     if ( !*mm ) m = mm;
02584                     else m = mm + *mm;
02585                 }
02586             }
02587         }
02588     }
02589     while ( s1 < tstop1 ) *m++ = *s1++;
02590     while ( s2 < tstop2 ) *m++ = *s2++;
02591     w[1] = WORDDIF(m,w);
02592     w[FUNHEAD] = w[1] - FUNHEAD;
02593     if ( ToFast(w+FUNHEAD,w+FUNHEAD) ) {
02594         if ( w[FUNHEAD] <= -FUNCTION ) w[1] = FUNHEAD+1;
02595         else w[1] = FUNHEAD+2;
02596         if ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 ) w[1] = FUNHEAD;
02597     }
02598 /*
02599     AT.SS->PolyFlag = AR.PolyFunType;*/
02600     AT.SS->PolyFlag = oldPolyFlag;
02601 }
02602
02603 /*
02604     #] AddArgs :
02605     #[ Compare1 :                WORD Compare1(term1,term2,level)
02606 */
02640 WORD Compare1(PHEAD WORD *term1, WORD *term2, WORD level)
02641 {
02642     SORTING *S = AT.SS;
02643     WORD *stopper1, *stopper2, *t2;
02644     WORD *s1, *s2, *t1;
02645     WORD *stopex1, *stopex2;
02646     WORD c1, c2;
02647     WORD prevorder;
02648     WORD count = -1, localPoly, polyhit = -1;
02649

```

```

02650 #ifdef COUNTCOMPARES
02651     if ( AR.sLevel == 0 ) {
02652 #ifdef WITHPTHREADS
02653         numcompares[AT.identity]++;
02654 #else
02655         numcompares[0]++;
02656 #endif
02657     }
02658 #endif
02659
02660     if ( S->PolyFlag ) {
02661 /*
02662         if ( S->PolyWise != 0 ) {
02663             MLOCK(ErrorMessageLock);
02664             MesPrint("S->PolyWise is not zero!!!!");
02665             MUNLOCK(ErrorMessageLock);
02666         }
02667 */
02668         count = 0; localPoly = 1; S->PolyWise = polyhit = 0;
02669         S->PolyFlag = AR.PolyFunType;
02670         if ( AR.PolyFunType == 2 &&
02671             ( AR.PolyFunExp == 2 || AR.PolyFunExp == 3 ) ) S->PolyFlag = 1;
02672     }
02673     else { localPoly = 0; }
02674 #ifdef WITHFLOAT
02675     AT.SortFloatMode = 0;
02676 #endif
02677     prevorder = 0;
02678     GETSTOP(term1,s1);
02679     stopper1 = s1;
02680     GETSTOP(term2,stopper2);
02681     t1 = term1 + 1;
02682     t2 = term2 + 1;
02683     while ( t1 < stopper1 && t2 < stopper2 ) {
02684         if ( *t1 != *t2 ) {
02685             if ( *t1 == HAAKJE ) return(PREV(-1));
02686             if ( *t2 == HAAKJE ) return(PREV(1));
02687             if ( *t1 >= (FUNCTION-1) ) {
02688                 if ( *t2 < (FUNCTION-1) ) return(PREV(-1));
02689                 if ( *t1 < FUNCTION && *t2 < FUNCTION ) return(PREV(*t2-*t1));
02690                 if ( *t1 < FUNCTION ) return(PREV(1));
02691                 if ( *t2 < FUNCTION ) return(PREV(-1));
02692                 c1 = functions[*t1-FUNCTION].commute;
02693                 c2 = functions[*t2-FUNCTION].commute;
02694                 if ( !c1 ) {
02695                     if ( c2 ) return(PREV(1));
02696                     else return(PREV(*t2-*t1));
02697                 }
02698                 else {
02699                     if ( !c2 ) return(PREV(-1));
02700                     else return(PREV(*t2-*t1));
02701                 }
02702             }
02703             else return(PREV(*t2-*t1));
02704         }
02705         s1 = t1 + 2;
02706         s2 = t2 + 2;
02707         c1 = *t1;
02708         t1 += t1[1];
02709         t2 += t2[1];
02710         if ( localPoly && c1 < FUNCTION ) {
02711             polyhit = 1;
02712         }
02713         if ( c1 <= (FUNCTION-1)
02714             || ( c1 >= FUNCTION && functions[c1-FUNCTION].spec > 0 ) ) {
02715             if ( c1 == SYMBOL ) {
02716                 if ( *s1 == FACTORSYMBOL && *s2 == FACTORSYMBOL
02717                     && s1[-1] == 4 && s2[-1] == 4
02718                     && ( ( t1 < stopper1 && *t1 == HAAKJE )
02719                         || ( t1 == stopper1 && AT.fromindex ) ) ) {
02720 /*
02721                 We have to be very careful with the criteria here, because
02722                 Compare1 is called both in the regular sorting and by the
02723                 routine that makes the bracket index. In the last case
02724                 there is no HAAKJE subterm.
02725 */
02726                 if ( s1[1] != s2[1] ) return(s2[1]-s1[1]);
02727                 s1 += 2; s2 += 2;
02728             }
02729             else if ( AR.SortType >= SORTPOWERFIRST ) {
02730                 WORD i1 = 0, *r1;
02731                 r1 = s1;
02732                 while ( s1 < t1 ) { i1 += s1[1]; s1 += 2; }
02733                 s1 = r1; r1 = s2;
02734                 while ( s2 < t2 ) { i1 -= s2[1]; s2 += 2; }
02735                 s2 = r1;
02736                 if ( i1 ) {

```

```

02737         if ( AR.SortType >= SORTANTIPOWER ) i1 = -i1;
02738         return(PREV(i1));
02739     }
02740 }
02741 while ( s1 < t1 ) {
02742     if ( s2 >= t2 ) {
02743         /* return(PREV(1)); */
02744         if ( AR.SortType==SORTLOWFIRST ) {
02745             return(PREV((s1[1]>0?-1:1)));
02746         }
02747         else {
02748             return(PREV((s1[1]<0?-1:1)));
02749         }
02750     }
02751     if ( *s1 != *s2 ) {
02752         /* return(PREV(*s2-*s1)); */
02753         if ( AR.SortType==SORTLOWFIRST ) {
02754             if ( *s1 < *s2 ) {
02755                 return(PREV((s1[1]<0?1:-1)));
02756             }
02757             else {
02758                 return(PREV((s2[1]<0?-1:1)));
02759             }
02760         }
02761         else {
02762             if ( *s1 < *s2 ) {
02763                 return(PREV((s1[1]<0?-1:1)));
02764             }
02765             else {
02766                 return(PREV((s2[1]<0?1:-1)));
02767             }
02768         }
02769     }
02770     s1++; s2++;
02771     if ( *s1 != *s2 ) return(
02772         PREV((AR.SortType==SORTLOWFIRST?*s2-*s1:*s1-*s2)));
02773     s1++; s2++;
02774 }
02775 if ( s2 < t2 ) {
02776     /* return(PREV(-1)); */
02777     if ( AR.SortType==SORTLOWFIRST ) {
02778         return(PREV((s2[1]<0?-1:1)));
02779     }
02780     else {
02781         return(PREV((s2[1]<0?1:-1)));
02782     }
02783 }
02784 }
02785 else if ( c1 == DOTPRODUCT ) {
02786     if ( AR.SortType >= SORTPOWERFIRST ) {
02787         WORD i1 = 0, *r1;
02788         r1 = s1;
02789         while ( s1 < t1 ) { i1 += s1[2]; s1 += 3; }
02790         s1 = r1; r1 = s2;
02791         while ( s2 < t2 ) { i1 -= s2[2]; s2 += 3; }
02792         s2 = r1;
02793         if ( i1 ) {
02794             if ( AR.SortType >= SORTANTIPOWER ) i1 = -i1;
02795             return(PREV(i1));
02796         }
02797     }
02798     while ( s1 < t1 ) {
02799         if ( s2 >= t2 ) return(PREV(1));
02800         if ( *s1 != *s2 ) return(PREV(*s2-*s1));
02801         s1++; s2++;
02802         if ( *s1 != *s2 ) return(PREV(*s2-*s1));
02803         s1++; s2++;
02804         if ( *s1 != *s2 ) return(
02805             PREV((AR.SortType==SORTLOWFIRST?*s2-*s1:*s1-*s2)));
02806         s1++; s2++;
02807     }
02808     if ( s2 < t2 ) return(PREV(-1));
02809 }
02810 else {
02811     while ( s1 < t1 ) {
02812         if ( s2 >= t2 ) return(PREV(1));
02813         if ( *s1 != *s2 ) return(PREV(*s2-*s1));
02814         s1++; s2++;
02815     }
02816     if ( s2 < t2 ) return(PREV(-1));
02817 }
02818 }
02819 else {
02820     #if FUNHEAD != 2
02821     s1 += FUNHEAD-2;
02822     s2 += FUNHEAD-2;
02823     #endif

```

```

02824         if ( localPoly && c1 == AR.PolyFun ) {
02825             if ( count == 0 ) {
02826                 if ( S->PolyFlag == 1 ) {
02827                     WORD i1, i2;
02828                     if ( *s1 > 0 ) i1 = *s1;
02829                     else if ( *s1 <= -FUNCTION ) i1 = 1;
02830                     else i1 = 2;
02831                     if ( *s2 > 0 ) i2 = *s2;
02832                     else if ( *s2 <= -FUNCTION ) i2 = 1;
02833                     else i2 = 2;
02834                     if ( s1+i1 == t1 && s2+i2 == t2 ) { /* This is the stuff */
02835                         /*
02836                         Test for scalar nature
02837                         */
02838                         if ( !polyhit ) {
02839                             WORD *u1, *u2, *ustop;
02840                             if ( *s1 < 0 ) {
02841                                 if ( *s1 != -SNUMBER && *s1 != -SYMBOL && *s1 > -FUNCTION )
02842                                     goto NoPoly;
02843                             }
02844                             else {
02845                                 u1 = s1 + ARGHEAD;
02846                                 while ( u1 < t1 ) {
02847                                     u2 = u1 + *u1;
02848                                     ustop = u2 - ABS(u2[-1]);
02849                                     u1++;
02850                                     while ( u1 < ustop ) {
02851                                         if ( *u1 == INDEX ) goto NoPoly;
02852                                         u1 += u1[1];
02853                                     }
02854                                     u1 = u2;
02855                                 }
02856                             }
02857                             if ( *s2 < 0 ) {
02858                                 if ( *s2 != -SNUMBER && *s2 != -SYMBOL && *s2 > -FUNCTION )
02859                                     goto NoPoly;
02860                             }
02861                             else {
02862                                 u1 = s2 + ARGHEAD;
02863                                 while ( u1 < t2 ) {
02864                                     u2 = u1 + *u1;
02865                                     ustop = u2 - ABS(u2[-1]);
02866                                     u1++;
02867                                     while ( u1 < ustop ) {
02868                                         if ( *u1 == INDEX ) goto NoPoly;
02869                                         u1 += u1[1];
02870                                     }
02871                                     u1 = u2;
02872                                 }
02873                             }
02874                         }
02875                         S->PolyWise = WORDDIF(s1,term1);
02876                         S->PolyWise -= FUNHEAD;
02877                         count = 1;
02878                         continue;
02879                     }
02880                     else {
02881 NoPoly:
02882                         S->PolyWise = localPoly = 0;
02883                     }
02884                 }
02885             else if ( AR.PolyFunType == 2 ) {
02886                 WORD i1, i2, i1a, i2a;
02887                 if ( *s1 > 0 ) i1 = *s1;
02888                 else if ( *s1 <= -FUNCTION ) i1 = 1;
02889                 else i1 = 2;
02890                 if ( *s2 > 0 ) i2 = *s2;
02891                 else if ( *s2 <= -FUNCTION ) i2 = 1;
02892                 else i2 = 2;
02893                 if ( s1[i1] > 0 ) i1a = s1[i1];
02894                 else if ( s1[i1] <= -FUNCTION ) i1a = 1;
02895                 else i1a = 2;
02896                 if ( s2[i2] > 0 ) i2a = s2[i2];
02897                 else if ( s2[i2] <= -FUNCTION ) i2a = 1;
02898                 else i2a = 2;
02899                 if ( s1+i1+i1a == t1 && s2+i2+i2a == t2 ) { /* This is the stuff */
02900                     /*
02901                     Test for scalar nature
02902                     */
02903                     if ( !polyhit ) {
02904                         WORD *u1, *u2, *ustop;
02905                         if ( *s1 < 0 ) {
02906                             if ( *s1 != -SNUMBER && *s1 != -SYMBOL && *s1 > -FUNCTION )
02907                                 goto NoPoly;
02908                         }
02909                         else {
02910                             u1 = s1 + ARGHEAD;

```

```

02911         while ( u1 < s1+i1 ) {
02912             u2 = u1 + *u1;
02913             ustop = u2 - ABS(u2[-1]);
02914             u1++;
02915             while ( u1 < ustop ) {
02916                 if ( *u1 == INDEX ) goto NoPoly;
02917                 u1 += u1[1];
02918             }
02919             u1 = u2;
02920         }
02921     }
02922     if ( s1[i1] < 0 ) {
02923         if ( s1[i1] != -SNUMBER && s1[i1] != -SYMBOL && s1[i1] > -FUNCTION )
02924             goto NoPoly;
02925     }
02926     else {
02927         u1 = s1 + i1 + ARGHEAD;
02928         while ( u1 < t1 ) {
02929             u2 = u1 + *u1;
02930             ustop = u2 - ABS(u2[-1]);
02931             u1++;
02932             while ( u1 < ustop ) {
02933                 if ( *u1 == INDEX ) goto NoPoly;
02934                 u1 += u1[1];
02935             }
02936             u1 = u2;
02937         }
02938     }
02939     if ( *s2 < 0 ) {
02940         if ( *s2 != -SNUMBER && *s2 != -SYMBOL && *s2 > -FUNCTION )
02941             goto NoPoly;
02942     }
02943     else {
02944         u1 = s2 + ARGHEAD;
02945         while ( u1 < s2+i2 ) {
02946             u2 = u1 + *u1;
02947             ustop = u2 - ABS(u2[-1]);
02948             u1++;
02949             while ( u1 < ustop ) {
02950                 if ( *u1 == INDEX ) goto NoPoly;
02951                 u1 += u1[1];
02952             }
02953             u1 = u2;
02954         }
02955     }
02956     if ( s2[i2] < 0 ) {
02957         if ( s2[i2] != -SNUMBER && s2[i2] != -SYMBOL && s2[i2] > -FUNCTION )
02958             goto NoPoly;
02959     }
02960     else {
02961         u1 = s2 + i2 + ARGHEAD;
02962         while ( u1 < t2 ) {
02963             u2 = u1 + *u1;
02964             ustop = u2 - ABS(u2[-1]);
02965             u1++;
02966             while ( u1 < ustop ) {
02967                 if ( *u1 == INDEX ) goto NoPoly;
02968                 u1 += u1[1];
02969             }
02970             u1 = u2;
02971         }
02972     }
02973 }
02974 S->PolyWise = WORDDIF(s1,term1);
02975 S->PolyWise -= FUNHEAD;
02976 count = 1;
02977 continue;
02978 }
02979 else {
02980     S->PolyWise = localPoly = 0;
02981 }
02982 }
02983 else {
02984     S->PolyWise = localPoly = 0;
02985 }
02986 }
02987 else {
02988     t1 = term1 + S->PolyWise;
02989     t2 = term2 + S->PolyWise;
02990     S->PolyWise = 0;
02991     localPoly = 0;
02992     continue;
02993 }
02994 }
02995 #ifdef WITHFLOAT
02996     if ( level == 0 && c1 == FLOATFUN && t1 == stopper1 && t2 == stopper2 && AT.aux_ != 0 ) {
02997 /*

```



```

02998             We have two FLOATFUN's. Test whether they are 'legal'
02999  */
03000             if ( TestFloat(s1-FUNHEAD) ) {
03001                 if ( TestFloat(s2-FUNHEAD) ) { AT.SortFloatMode = 3; return(0); }
03002                 else { return(1); }
03003             }
03004             else if ( TestFloat(s2-FUNHEAD) ) { return(-1); }
03005         }
03006     #endif
03007     while ( s1 < t1 ) {
03008         /*
03009             The next statement was added 9-nov-2001. It repaired a bad error
03010         */
03011         if ( s2 >= t2 ) return(PREV(-1));
03012         /*
03013             There is a little problem here with fast arguments
03014             We don't want to sacrifice speed, but we like to
03015             keep a rational ordering. This last one suffers in
03016             the solution that has been chosen here.
03017         */
03018         if ( AC.properorderflag ) {
03019             WORD oldpolyflag;
03020             oldpolyflag = S->PolyFlag;
03021             S->PolyFlag = 0;
03022             if ( ( c2 = -CompArg(s1,s2) ) != 0 ) {
03023                 S->PolyFlag = oldpolyflag; return(PREV(c2));
03024             }
03025             S->PolyFlag = oldpolyflag;
03026             NEXTARG(s1)
03027             NEXTARG(s2)
03028         }
03029         else {
03030             if ( *s1 > 0 ) {
03031                 if ( *s2 > 0 ) {
03032                     WORD oldpolyflag;
03033                     stopex1 = s1 + *s1;
03034                     if ( s2 >= t2 ) return(PREV(-1));
03035                     stopex2 = s2 + *s2;
03036                     s1 += ARGHEAD; s2 += ARGHEAD;
03037                     oldpolyflag = S->PolyFlag;
03038                     S->PolyFlag = 0;
03039                     while ( s1 < stopex1 ) {
03040                         if ( s2 >= stopex2 ) {
03041                             S->PolyFlag = oldpolyflag; return(PREV(-1));
03042                         }
03043                         if ( ( c2 = CompareTerms(BHEAD s1,s2,(WORD)1) ) != 0 ) {
03044                             S->PolyFlag = oldpolyflag; return(PREV(c2));
03045                         }
03046                         s1 += *s1;
03047                         s2 += *s2;
03048                     }
03049                     S->PolyFlag = oldpolyflag;
03050                     if ( s2 < stopex2 ) return(PREV(1));
03051                 }
03052                 else return(PREV(1));
03053             }
03054             else {
03055                 if ( *s2 > 0 ) return(PREV(-1));
03056                 if ( *s1 != *s2 ) { return(PREV(*s1-*s2)); }
03057                 if ( *s1 > -FUNCTION ) {
03058                     if ( **s1 != **s2 ) { return(PREV(*s2-*s1)); }
03059                 }
03060                 s1++; s2++;
03061             }
03062         }
03063     }
03064     if ( s2 < t2 ) return(PREV(1));
03065 }
03066 }
03067 #ifdef WITHFLOAT
03068     if ( level == 0 && t1 < stopper1 && *t1 == FLOATFUN && t1+t1[1] == stopper1
03069         && TestFloat(t1) && AT.aux_ != 0 ) {
03070         AT.SortFloatMode = 1; return(0);
03071     }
03072     else if ( level == 0 && t2 < stopper2 && *t2 == FLOATFUN && t2+t2[1] == stopper2
03073         && TestFloat(t2) && AT.aux_ != 0 ) {
03074         AT.SortFloatMode = 2; return(0);
03075     }
03076 #endif
03077 {
03078     if ( AR.SortType != SORTLOWFIRST ) {
03079         if ( t1 < stopper1 ) return(PREV(1));
03080         if ( t2 < stopper2 ) return(PREV(-1));
03081     }
03082     else {
03083         if ( t1 < stopper1 ) return(PREV(-1));
03084         if ( t2 < stopper2 ) return(PREV(1));
03085     }

```

```

03085     }
03086 }
03087 if ( level == 3 ) return(CompCoef(term1,term2));
03088 if ( level >= 1 )
03089     return(CompCoef(term2,term1));
03090 return(0);
03091 }
03092
03093 /*
03094     #] Compare1 :
03095     #[ CompareSymbols :          WORD CompareSymbols(term1,term2,par)
03096 */
03110 WORD CompareSymbols(PHEAD WORD *term1, WORD *term2, WORD par)
03111 {
03112     int sum1, sum2;
03113     WORD *t1, *t2, *tt1, *tt2;
03114     int low, high;
03115     DUMMYUSE(par);
03116     if ( AR.SortType == SORTLOWFIRST ) { low = 1; high = -1; }
03117     else { low = -1; high = 1; }
03118     t1 = term1 + 1; tt1 = term1+*term1; tt1 -= ABS(tt1[-1]); t1 += 2;
03119     t2 = term2 + 1; tt2 = term2+*term2; tt2 -= ABS(tt2[-1]); t2 += 2;
03120     if ( AN.polysortflag > 0 ) {
03121         sum1 = 0; sum2 = 0;
03122         while ( t1 < tt1 ) { sum1 += t1[1]; t1 += 2; }
03123         while ( t2 < tt2 ) { sum2 += t2[1]; t2 += 2; }
03124         if ( sum1 < sum2 ) return(low);
03125         if ( sum1 > sum2 ) return(high);
03126         t1 = term1+3; t2 = term2 + 3;
03127     }
03128     while ( t1 < tt1 && t2 < tt2 ) {
03129         if ( *t1 > *t2 ) return(low);
03130         if ( *t1 < *t2 ) return(high);
03131         if ( t1[1] < t2[1] ) return(low);
03132         if ( t1[1] > t2[1] ) return(high);
03133         t1 += 2; t2 += 2;
03134     }
03135     if ( t1 < tt1 ) return(high);
03136     if ( t2 < tt2 ) return(low);
03137     return(0);
03138 }
03139
03140 /*
03141     #] CompareSymbols :
03142     #[ CompareHSymbols :          WORD CompareHSymbols(term1,term2,par)
03143 */
03153 WORD CompareHSymbols(PHEAD WORD *term1, WORD *term2, WORD par)
03154 {
03155     WORD *t1, *t2, *tt1, *tt2, *ttt1, *ttt2;
03156     DUMMYUSE(par);
03157     DUMMYUSE(AT.WorkPointer);
03158     t1 = term1 + 1; tt1 = term1+*term1; tt1 -= ABS(tt1[-1]); t1 += 2;
03159     t2 = term2 + 1; tt2 = term2+*term2; tt2 -= ABS(tt2[-1]); t2 += 2;
03160     while ( t1 < tt1 && t2 < tt2 ) {
03161         if ( *t1 != *t2 ) {
03162             if ( t1[0] < t2[0] ) return(-1);
03163             return(1);
03164         }
03165         else if ( *t1 == HAAKJE ) {
03166             t1 += 3; t2 += 3; continue;
03167         }
03168         ttt1 = t1+tt1[1]; ttt2 = t2+tt2[1];
03169         while ( t1 < ttt1 && t2 < ttt2 ) {
03170             if ( *t1 > *t2 ) return(-1);
03171             if ( *t1 < *t2 ) return(1);
03172             if ( t1[1] < t2[1] ) return(-1);
03173             if ( t1[1] > t2[1] ) return(1);
03174             t1 += 2; t2 += 2;
03175         }
03176         if ( t1 < ttt1 ) return(1);
03177         if ( t2 < ttt2 ) return(-1);
03178     }
03179     if ( t1 < tt1 ) return(1);
03180     if ( t2 < tt2 ) return(-1);
03181     return(0);
03182 }
03183
03184 /*
03185     #] CompareHSymbols :
03186     #[ ComPress :          LONG ComPress(ss,n)
03187 */
03206 LONG ComPress(WORD **ss, LONG *n)
03207 {
03208     GETIDENTITY
03209     WORD *t, *s, j, k;
03210     LONG size = 0;
03211     int newsize, i;

```

```

03212 /*
03213         #[] debug :
03214
03215         WORD **sss = ss;
03216
03217         if ( AP.DebugFlag ) {
03218             UBYTE OutBuf[140];
03219             MLOCK(ErrorMessageLock);
03220             MesPrint("ComPress:");
03221             AO.OutFill = AO.OutputLine = OutBuf;
03222             AO.OutSkip = 3;
03223             FiniLine();
03224             ss = sss;
03225             while ( *ss ) {
03226                 s = *ss++;
03227                 j = *s;
03228                 if ( j < 0 ) {
03229                     j = s[1] + 2;
03230                 }
03231                 while ( --j >= 0 ) {
03232                     TailToLine((UWORD) (*s++)); TokenToLine((UBYTE *) " ");
03233                 }
03234                 FiniLine();
03235             }
03236             AO.OutSkip = 0;
03237             FiniLine();
03238             MUNLOCK(ErrorMessageLock);
03239             ss = sss;
03240         }
03241
03242         #[] debug :
03243     */
03244     *n = 0;
03245     if ( AT.SS == AT.S0 && !AR.NoCompress ) {
03246         if ( AN.compressSize == 0 ) {
03247             if ( *ss ) { AN.compressSize = *ss + 64; }
03248             else { AN.compressSize = AM.MaxTer/sizeof(WORD) + 2; }
03249             AN.compressSpace = (WORD *) Malloc1(AN.compressSize*sizeof(WORD), "Compression");
03250         }
03251         AN.compressSpace[0] = 0;
03252         while ( *ss ) {
03253             k = 0;
03254             s = *ss;
03255             j = *s++;
03256             if ( j > AN.compressSize ) {
03257                 newsize = j + 64;
03258                 t = (WORD *) Malloc1(newsize*sizeof(WORD), "Compression");
03259                 t[0] = 0;
03260                 if ( AN.compressSpace ) {
03261                     for ( i = 0; i < *AN.compressSpace; i++ ) t[i] = AN.compressSpace[i];
03262                     M_free(AN.compressSpace, "Compression");
03263                 }
03264                 AN.compressSpace = t;
03265                 AN.compressSize = newsize;
03266             }
03267             t = AN.compressSpace;
03268             i = *t - 1;
03269             *t++ = j; j--;
03270             if ( AR.PolyFun ) {
03271                 WORD *polystop, *sa;
03272                 sa = s + j;
03273                 sa -= ABS(sa[-1]);
03274                 polystop = s;
03275                 while ( polystop < sa && *polystop != AR.PolyFun ) {
03276                     polystop += polystop[1];
03277                 }
03278                 while ( i > 0 && j > 0 && *s == *t && s < polystop ) {
03279                     i--; j--; s++; t++; k--;
03280                 }
03281             }
03282             else {
03283                 WORD *sa;
03284                 sa = s + j;
03285                 sa -= ABS(sa[-1]);
03286                 while ( i > 0 && j > 0 && *s == *t && s < sa ) { i--; j--; s++; t++; k--; }
03287             }
03288             if ( k < -1 ) {
03289                 s[-1] = j;
03290                 s[-2] = k;
03291                 *ss = s-2;
03292                 size += j + 2;
03293             }
03294             else {
03295                 size += *AN.compressSpace;
03296                 if ( k == -1 ) { t--; s--; j++; }
03297             }
03298             while ( --j >= 0 ) *t++ = *s++;

```

```

03299 /*          Sabotage getting into the coefficient next time */
03300         t = AN.compressSpace + *AN.compressSpace;
03301         t[-(ABS(t[-1]))] = 0;
03302         ss++;
03303         (*n)++;
03304     }
03305 }
03306 else {
03307     while ( *ss ) {
03308         size += *(ss++);
03309         (*n)++;
03310     }
03311 }
03312 /*
03313     #[ debug :
03314
03315     if ( AP.DebugFlag ) {
03316         UBYTE OutBuf[140];
03317         AO.OutFill = AO.OutputLine = OutBuf;
03318         AO.OutSkip = 3;
03319         FiniLine();
03320         ss = sss;
03321         while ( *ss ) {
03322             s = ss++;
03323             j = *s;
03324             if ( j < 0 ) {
03325                 j = s[1] + 2;
03326             }
03327             while ( --j >= 0 ) {
03328                 TalToLine((UWORD) (*s++)); TokenToLine((UBYTE *) " ");
03329             }
03330             FiniLine();
03331         }
03332         AO.OutSkip = 0;
03333         FiniLine();
03334     }
03335
03336     #] debug :
03337 */
03338     return(size);
03339 }
03340
03341 /*
03342     #] ComPress :
03343     #[ SplitMerge :                void SplitMerge(Point,number)
03344 */
03370 #ifndef NEWSPLITMERGE
03371
03372 LONG SplitMerge(PHEAD WORD **Pointer, LONG number)
03373 {
03374     GETBIDENTITY
03375     SORTING *S = AT.SS;
03376     WORD **pp3, **pp1, **pp2, **pptop;
03377     LONG i, newleft, newright, split;
03378
03379 #ifdef SPLITMERGEDEBUG
03380     /* Print current array state on entry. */
03381     printf("%4ld: ", number);
03382     for (int ii = 0; ii < S->sTerms; ii++) {
03383         if ( (S->sPointer)[ii] ) {
03384             printf("%4d ", (unsigned) (S->sPointer[ii]-S->sBuffer));
03385         }
03386         else {
03387             printf(".... ");
03388         }
03389     }
03390     printf("\n");
03391     fflush(stdout);
03392 #endif
03393
03394     if ( number < 2 ) return(number);
03395     if ( number == 2 ) {
03396         pp1 = Pointer; pp2 = pp1 + 1;
03397         if ( ( i = CompareTerms(BHEAD *pp1,*pp2,(WORD)0) ) < 0 ) {
03398             pp3 = (WORD **)(*pp1); *pp1 = *pp2; *pp2 = (WORD *)pp3;
03399         }
03400         else if ( i == 0 ) {
03401             number--;
03402             if ( S->PolyWise ) { if ( AddPoly(BHEAD pp1,pp2) == 0 ) number = 0; }
03403             else { if ( AddCoef(BHEAD pp1,pp2) == 0 ) number = 0; }
03404         }
03405         return(number);
03406     }
03407     pptop = Pointer + number;
03408     split = number/2;
03409     newleft = SplitMerge(BHEAD Pointer,split);
03410     newright = SplitMerge(BHEAD Pointer+split,number-split);

```

```

03411     if ( newright == 0 ) return(newleft);
03412  /*
03413     We compare the last of the left with the first of the right
03414     If they are already in order, we will be done quickly.
03415     We may have to compactify the buffer because the recursion may
03416     have created holes. Also this compare may result in equal terms.
03417     Addition of 23-jul-1999. It makes things a bit faster.
03418  */
03419     if ( newleft > 0 && newright > 0 &&
03420         ( i = CompareTerms(BHEAD Pointer[newleft-1],Pointer[split],(WORD)0) ) >= 0 ) {
03421         pp2 = Pointer+split; pp1 = Pointer+newleft-1;
03422         if ( i == 0 ) {
03423             if ( S->PolyWise ) {
03424                 if ( AddPoly(BHEAD pp1,pp2) > 0 ) pp1++;
03425                 else newleft--;
03426             }
03427             else {
03428                 if ( AddCoef(BHEAD pp1,pp2) > 0 ) pp1++;
03429                 else newleft--;
03430             }
03431             *pp2++ = 0; newright--;
03432         }
03433         else pp1++;
03434         newleft += newright;
03435         if ( pp1 < pp2 ) {
03436             while ( --newright >= 0 ) *pp1++ = *pp2++;
03437             while ( pp1 < pptop ) *pp1++ = 0;
03438         }
03439         return(newleft);
03440     }
03441
03442     if ( split >= AN.SplitScratchSize ) {
03443         AN.SplitScratchSize = (split*3)/2+100;
03444         if ( AN.SplitScratchSize > S->Terms2InSmall/2 )
03445             AN.SplitScratchSize = S->Terms2InSmall/2;
03446         if ( AN.SplitScratch ) M_free(AN.SplitScratch,"AN.SplitScratch");
03447         AN.SplitScratch = (WORD **)Malloca(AN.SplitScratchSize*sizeof(WORD *),"AN.SplitScratch");
03448     }
03449
03450     pp3 = AN.SplitScratch; pp1 = Pointer;
03451     /* Move rather than copy, so GarbHand can't double-count. */
03452     for ( i = 0; i < newleft; i++ ) { *pp3++ = *pp1; *pp1++ = 0; }
03453     AN.InScratch = newleft;
03454     pp1 = AN.SplitScratch; pp2 = Pointer + split; pp3 = Pointer;
03455
03456 #ifndef NEWSPLITMERGETIMSORT
03457  /*
03458     An improvement in the style of Timsort
03459  */
03460     while ( newleft > 8 ) {
03461         /* Check the middle of the LHS terms */
03462         LONG nnleft = newleft/2;
03463         if ( ( i = CompareTerms(BHEAD pp1[nnleft],*pp2,(WORD)0) ) < 0 ) {
03464             /* The terms are not in order. Break out and continue as normal. */
03465             break;
03466         }
03467         /* The terms merge or are in order. Copy pointers up to this point. */
03468         /* In the copy, zero the skipped pointers so GarbHand can't double-count. */
03469         for (int iii = 0; iii < nnleft; iii++) {
03470             *pp3++ = *pp1;
03471             *pp1++ = 0;
03472         }
03473         newleft -= nnleft;
03474         if ( i == 0 ) {
03475             if ( S->PolyWise ) { i = AddPoly(BHEAD pp1,pp2); }
03476             else { i = AddCoef(BHEAD pp1,pp2); }
03477             if ( i == 0 ) {
03478                 /* The terms cancelled. The next term goes in *pp3. Don't move. */
03479             }
03480             else {
03481                 /* The terms added. Advance pp3. */
03482                 *pp3++ = *pp1;
03483             }
03484             /* We have taken a LHS (copy) and RHS term. */
03485             *pp2++ = 0;
03486             newright--;
03487             *pp1++ = 0;
03488             newleft--;
03489             break;
03490         }
03491     }
03492 #endif
03493
03494     while ( newleft > 0 && newright > 0 ) {
03495         if ( ( i = CompareTerms(BHEAD *pp1,*pp2,(WORD)0) ) < 0 ) {
03496             *pp3++ = *pp2;
03497             *pp2++ = 0;

```

```

03498         newright--;
03499     }
03500     else if ( i > 0 ) {
03501         *pp3++ = *pp1;
03502         *pp1++ = 0;
03503         newleft--;
03504     }
03505     else {
03506         if ( S->PolyWise ) { if ( AddPoly(BHEAD pp1,pp2) > 0 ) *pp3++ = *pp1; }
03507         else { if ( AddCoef(BHEAD pp1,pp2) > 0 ) *pp3++ = *pp1; }
03508         *pp1++ = 0; *pp2++ = 0; newleft--; newright--;
03509     }
03510 }
03511 for ( i = 0; i < newleft; i++ ) { *pp3++ = *pp1; *pp1++ = 0; }
03512 if ( pp3 == pp2 ) {
03513     pp3 += newright;
03514 } else {
03515     for ( i = 0; i < newright; i++ ) { *pp3++ = *pp2++; }
03516 }
03517 newleft = pp3 - Pointer;
03518 while ( pp3 < pptop ) *pp3++ = 0;
03519 AN.InScratch = 0;
03520 return(newleft);
03521 }
03522
03523 #else
03524
03525 LONG SplitMerge(PHEAD WORD **Pointer, LONG number)
03526 {
03527     GETBIDENTITY
03528     SORTING *S = AT.SS;
03529     WORD **pp3, **pp1, **pp2;
03530     LONG nleft, nright, i, newleft, newright;
03531     WORD **pptop;
03532
03533 #ifdef SPLITMERGEDEBUG
03534     /* Print current array state on entry. */
03535     printf("%4ld: ", number);
03536     for (int ii = 0; ii < S->sTerms; ii++) {
03537         if ( (S->sPointer)[ii] ) {
03538             printf("%4d ", (unsigned)(S->sPointer[ii]-S->sBuffer));
03539         }
03540         else {
03541             printf(".... ");
03542         }
03543     }
03544     printf("\n");
03545     fflush(stdout);
03546 #endif
03547
03548     if ( number < 2 ) return(number);
03549     if ( number == 2 ) {
03550         pp1 = Pointer; pp2 = pp1 + 1;
03551         if ( ( i = CompareTerms(BHEAD *pp1,*pp2,(WORD)0) ) < 0 ) {
03552             pp3 = (WORD **)(*pp1); *pp1 = *pp2; *pp2 = (WORD *)pp3;
03553         }
03554         else if ( i == 0 ) {
03555             number--;
03556             if ( S->PolyWise ) { if ( AddPoly(BHEAD pp1,pp2) == 0 ) { number = 0; } }
03557             else { if ( AddCoef(BHEAD pp1,pp2) == 0 ) { number = 0; } }
03558         }
03559         return(number);
03560     }
03561     pptop = Pointer + number;
03562     nleft = number » 1; nright = number - nleft;
03563     newleft = SplitMerge(BHEAD Pointer,nleft);
03564     newright = SplitMerge(BHEAD Pointer+nleft,nright);
03565     /*
03566     We compare the last of the left with the first of the right
03567     If they are already in order, we will be done quickly.
03568     We may have to compactify the buffer because the recursion may
03569     have created holes. Also this compare may result in equal terms.
03570     Addition of 23-jul-1999. It makes things a bit faster.
03571     */
03572     if ( newleft > 0 && newright > 0 &&
03573         ( i = CompareTerms(BHEAD Pointer[newleft-1],Pointer[nleft],(WORD)0) ) >= 0 ) {
03574         pp2 = Pointer+nleft; pp1 = Pointer+newleft-1;
03575         if ( i == 0 ) {
03576             if ( S->PolyWise ) {
03577                 if ( AddPoly(BHEAD pp1,pp2) > 0 ) pp1++;
03578                 else newleft--;
03579             }
03580             else {
03581                 if ( AddCoef(BHEAD pp1,pp2) > 0 ) pp1++;
03582                 else newleft--;
03583             }
03584             *pp2++ = 0; newright--;

```

```

03585     }
03586     else pp1++;
03587     newleft += newright;
03588     if ( pp1 < pp2 ) {
03589         while ( --newright >= 0 ) *pp1++ = *pp2++;
03590         while ( pp1 < pptop ) *pp1++ = 0;
03591     }
03592     return(newleft);
03593 }
03594 if ( nleft > AN.SplitScratchSize ) {
03595     AN.SplitScratchSize = (nleft*3)/2+100;
03596     if ( AN.SplitScratchSize > S->Terms2InSmall/2 )
03597         AN.SplitScratchSize = S->Terms2InSmall/2;
03598     if ( AN.SplitScratch ) M_free(AN.SplitScratch,"AN.SplitScratch");
03599     AN.SplitScratch = (WORD **)Malloca(AN.SplitScratchSize*sizeof(WORD *),"AN.SplitScratch");
03600 }
03601 pp3 = AN.SplitScratch; pp1 = Pointer; i = nleft;
03602 do { *pp3++ = *pp1; *pp1++ = 0; } while ( *pp1 && --i > 0 );
03603 if ( i > 0 ) { *pp3 = 0; i--; }
03604 AN.InScratch = nleft - i;
03605 pp1 = AN.SplitScratch; pp2 = Pointer + nleft; pp3 = Pointer;
03606 while ( nleft > 0 && nright > 0 && *pp1 && *pp2 ) {
03607     if ( ( i = CompareTerms(BHEAD *pp1,*pp2,(WORD)0) ) < 0 ) {
03608         *pp3++ = *pp2;
03609         *pp2++ = 0;
03610         nright--;
03611     }
03612     else if ( i > 0 ) {
03613         *pp3++ = *pp1;
03614         *pp1++ = 0;
03615         nleft--;
03616     }
03617     else {
03618         if ( S->PolyWise ) { if ( AddPoly(BHEAD pp1,pp2) > 0 ) *pp3++ = *pp1; }
03619         else { if ( AddCoef(BHEAD pp1,pp2) > 0 ) *pp3++ = *pp1; }
03620         *pp1++ = 0; *pp2++ = 0; nleft--; nright--;
03621     }
03622 }
03623 while ( --nleft >= 0 && *pp1 ) { *pp3++ = *pp1; *pp1++ = 0; }
03624 while ( --nright >= 0 && *pp2 ) { *pp3++ = *pp2++; }
03625 nleft = pp3 - Pointer;
03626 while ( pp3 < pptop ) *pp3++ = 0;
03627 AN.InScratch = 0;
03628 return(nleft);
03629 }
03630
03631 #endif
03632
03633 /*
03634     #] SplitMerge :
03635     #[ GarbHand :          void GarbHand()
03636 */
03652 void GarbHand(void)
03653 {
03654     GETIDENTITY
03655     SORTING *S = AT.SS;
03656     WORD **Point, *s2, *t, *garbuf, i;
03657     LONG k, total = 0;
03658     int tobereturned = 0;
03659     /*
03660     Compute the size needed. Put it in total.
03661     */
03662     #ifdef TESTGARB
03663     MLOCK(ErrorMessageLock);
03664     MesPrint("in: S->sFill = %l, S->sTop2 = %l",S->sFill-S->sBuffer,S->sTop2-S->sBuffer);
03665     #endif
03666     Point = S->sPointer;
03667     k = S->sTerms;
03668     while ( --k >= 0 ) {
03669         if ( ( s2 = *Point++ ) != 0 ) { total += *s2; }
03670     }
03671     Point = AN.SplitScratch;
03672     k = AN.InScratch;
03673     while ( --k >= 0 ) {
03674         if ( ( s2 = *Point++ ) != 0 ) { total += *s2; }
03675     }
03676     #ifdef TESTGARB
03677     MesPrint("total = %l, nterms = %l",total,AN.InScratch);
03678     MUNLOCK(ErrorMessageLock);
03679     #endif
03680     /*
03681     Test now whether it fits. If so deal with the problem inside
03682     the memory at the tail of the large buffer.
03683     */
03684     if ( S->lBuffer != 0 && S->lFill + total <= S->lTop ) {
03685         garbuf = S->lFill;
03686     }

```

```

03687     else {
03688         garbuf = (WORD *)Malloca1(total*sizeof(WORD),"Garbage buffer");
03689         tobereturned = 1;
03690     }
03691     t = garbuf;
03692     Point = S->sPointer;
03693     k = S->sTerms;
03694     while ( --k >= 0 ) {
03695         if ( *Point ) {
03696             s2 = *Point++;
03697             i = *s2;
03698             NCOPY(t,s2,i);
03699         }
03700         else { Point++; }
03701     }
03702     Point = AN.SplitScratch;
03703     k = AN.InScratch;
03704     while ( --k >= 0 ) {
03705         if ( *Point ) {
03706             s2 = *Point++;
03707             i = *s2;
03708             NCOPY(t,s2,i);
03709         }
03710         else Point++;
03711     }
03712     s2 = S->sBuffer;
03713     t = garbuf;
03714     Point = S->sPointer;
03715     k = S->sTerms;
03716     while ( --k >= 0 ) {
03717         if ( *Point ) {
03718             *Point++ = s2;
03719             i = *t;
03720             NCOPY(s2,t,i);
03721         }
03722         else { Point++; }
03723     }
03724     Point = AN.SplitScratch;
03725     k = AN.InScratch;
03726     while ( --k >= 0 ) {
03727         if ( *Point ) {
03728             *Point++ = s2;
03729             i = *t;
03730             NCOPY(s2,t,i);
03731         }
03732         else Point++;
03733     }
03734     S->sFill = s2;
03735 #ifdef TESTGARB
03736     MLOCK(ErrorMessageLock);
03737     MesPrint("out: S->sFill = %1, S->sTop2 = %1", S->sFill-S->sBuffer, S->sTop2-S->sBuffer);
03738     if ( S->sFill >= S->sTop2 ) {
03739         MesPrint("We are in deep trouble");
03740     }
03741     MUNLOCK(ErrorMessageLock);
03742 #endif
03743     if ( tobereturned ) M_free(garbuf,"Garbage buffer");
03744     return;
03745 }
03746
03747 /*
03748     #] GarbHand :
03749     #[ MergePatches :          WORD MergePatches(par)
03750 */
03751 int MergePatches(WORD par)
03752 {
03753     GETIDENTITY
03754     SORTING *S = AT.SS;
03755     WORD **poin, **poin2, ul, k, i, im, *m1;
03756     WORD *p, lpat, mpat, level, l1, l2, r1, r2, r3, c;
03757     WORD *m2, *m3, r31, r33, ki, *rr;
03758     UWORD *coef;
03759     POSITION position;
03760     FILEHANDLE *fin, *fout;
03761     int fhandle;
03762
03763     /*
03764         UBYTE *s;
03765     */
03766 #ifdef WITHZLIB
03767     POSITION position2;
03768     int oldgzipCompress = AR.gzipCompress;
03769     if ( par == 2 ) {
03770         AR.gzipCompress = 0;
03771     }
03772 #endif
03773     fin = &S->file;
03774     fout = &(AR.FoStage4[0]);

```



```

03790 NewMerge:
03791     coef = AN.SoScratC;
03792     poin = S->poina; poin2 = S->poin2a;
03793     rr = AR.CompressPointer;
03794     *rr = 0;
03795     /*
03796         #[] Setup :
03797     */
03798     if ( par == 1 ) {
03799         fout = &(S->file);
03800         if ( fout->handle < 0 ) {
03801 FileMake:
03802             PUTZERO(AN.OldPosOut);
03803             if ( ( fhandle = CreateFile(fout->name) ) < 0 ) {
03804                 MLOCK(ErrorMessageLock);
03805                 MesPrint("Cannot create file %s",fout->name);
03806                 MUNLOCK(ErrorMessageLock);
03807                 goto ReturnError;
03808             }
03809 #ifdef GZIPDEBUG
03810             MLOCK(ErrorMessageLock);
03811             MesPrint("%w MergePatches created output file %s",fout->name);
03812             MUNLOCK(ErrorMessageLock);
03813 #endif
03814             fout->handle = fhandle;
03815             PUTZERO(fout->filesize);
03816             PUTZERO(fout->PPosition);
03817         /*
03818             Should not be here?
03819         #ifdef WITHZLIB
03820             fout->ziobuffer = 0;
03821         #endif
03822     */
03823 #ifdef ALLLOCK
03824         LOCK(fout->pthreadlock);
03825 #endif
03826         SeekFile(fout->handle,&(fout->filesize),SEEK_SET);
03827 #ifdef ALLLOCK
03828         UNLOCK(fout->pthreadlock);
03829 #endif
03830         S->fPatchN = 0;
03831         PUTZERO(S->fPatches[0]);
03832         fout->Pofill = fout->PObuffer;
03833         PUTZERO(fout->PPosition);
03834     }
03835 ConMer:
03836     StageSort(fout);
03837 #ifdef WITHZLIB
03838     if ( S == AT.S0 && AR.NoCompress == 0 && AR.zipCompress > 0 )
03839         S->fpcompressed[S->fPatchN] = 1;
03840     else
03841         S->fpcompressed[S->fPatchN] = 0;
03842     SetupOutputGZIP(fout);
03843 #endif
03844     }
03845     else if ( par == 0 && S->stage4 > 0 ) {
03846     /*
03847         We will have to do our job more than once.
03848         Input is from S->file and output will go to AR.FoStage4.
03849         The file corresponding to this last one must be made now.
03850     */
03851         AR.Stage4Name ^= 1;
03852     /*
03853         s = (UBYTE *) (fout->name); while ( *s ) s++;
03854         if ( AR.Stage4Name ) s[-1] += 1;
03855         else
03856             s[-1] -= 1;
03857     */
03857         S->iPatches = S->fPatches;
03858         S->fPatches = S->inPatches;
03859         S->inPatches = S->iPatches;
03860         (S->inNum) = S->fPatchN;
03861         AN.OldPosIn = AN.OldPosOut;
03862 #ifdef WITHZLIB
03863         m1 = S->fpincompressed;
03864         S->fpincompressed = S->fpcompressed;
03865         S->fpcompressed = m1;
03866         for ( i = 0; i < S->inNum; i++ ) {
03867             S->fPatchesStop[i] = S->iPatches[i+1];
03868 #ifdef GZIPDEBUG
03869             MLOCK(ErrorMessageLock);
03870             MesPrint("%w fPatchesStop[%d] = %l0p",i,&(S->fPatchesStop[i]));
03871             MUNLOCK(ErrorMessageLock);
03872 #endif
03873         }
03874 #endif
03875         S->stage4 = 0;
03876         goto FileMake;

```

```

03877     }
03878     else {
03879 #ifdef WITHZLIB
03880 /*
03881     The next statement is just for now
03882 */
03883     AR.gzipCompress = 0;
03884 #endif
03885     if ( par == 0 ) {
03886         S->iPatches = S->fPatches;
03887         S->inNum = S->fPatchN;
03888 #ifdef WITHZLIB
03889         m1 = S->fpincompressed;
03890         S->fpincompressed = S->fpcompressed;
03891         S->fpcompressed = m1;
03892         for ( i = 0; i < S->inNum; i++ ) {
03893             S->fPatchesStop[i] = S->fPatches[i+1];
03894 #ifdef GZIPDEBUG
03895             MLOCK(ErrorMessageLock);
03896             MesPrint("%w fPatchesStop[%d] = %10p", i, &(S->fPatchesStop[i]));
03897             MUNLOCK(ErrorMessageLock);
03898 #endif
03899         }
03900 #endif
03901     }
03902     fout = AR.outfile;
03903 }
03904 if ( par ) { /* Mark end of patches */
03905     S->Patches[S->lPatch] = S->lFill;
03906     for ( i = 0; i < S->lPatch; i++ ) {
03907         S->pStop[i] = S->Patches[i+1]-1;
03908         S->Patches[i] = (WORD *)(((UBYTE *) (S->Patches[i])) + AM.MaxTer);
03909     }
03910 }
03911 else { /* Load the patches */
03912     S->lPatch = (S->inNum);
03913 #ifdef WITHMPI
03914     if ( S->lPatch > 1 || ( (PF.exprtodo < 0) && (fout == AR.outfile || fout == AR.hidefile ) ) ) {
03915 #else
03916     if ( S->lPatch > 1 ) {
03917 #endif
03918 #ifdef WITHZLIB
03919         SetupAllInputGZIP(S);
03920 #endif
03921         p = S->lBuffer;
03922         for ( i = 0; i < S->lPatch; i++ ) {
03923             p = (WORD *)(((UBYTE *)p)+2*AM.MaxTer+COMPINC*sizeof(WORD));
03924             S->Patches[i] = p;
03925             p = (WORD *)(((UBYTE *)p) + fin->POsize);
03926             S->pStop[i] = m2 = p;
03927 #ifdef WITHZLIB
03928             PutIn(fin, &(S->iPatches[i]), S->Patches[i], &m2, i);
03929 #else
03930             ADDPOS(S->iPatches[i], PutIn(fin, &(S->iPatches[i]), S->Patches[i], &m2, i));
03931 #endif
03932         }
03933     }
03934 }
03935 if ( fout->handle >= 0 ) {
03936     PUTZERO(position);
03937 #ifdef ALLLOCK
03938     LOCK(fout->pthreadlock);
03939 #endif
03940     SeekFile(fout->handle, &position, SEEK_END);
03941     ADDPOS(position, ((fout->POfill-fout->PObuffer)*sizeof(WORD)));
03942 #ifdef ALLLOCK
03943     UNLOCK(fout->pthreadlock);
03944 #endif
03945 }
03946 else {
03947     SETBASEPOSITION(position, (fout->POfill-fout->PObuffer)*sizeof(WORD));
03948 }
03949 /*
03950     #] Setup :
03951
03952     The old code had to be replaced because all output needs to go
03953     through PutOut. For this we have to go term by term and keep
03954     track of the compression.
03955 */
03956     if ( S->lPatch == 1 ) { /* Single patch --> direct copy. Very rare. */
03957         LONG length;
03958
03959         if ( fout->handle < 0 ) if ( Sflush(fout) ) goto PatCall;
03960         if ( par ) { /* Memory to file */
03961 #ifdef WITHZLIB
03962 /*
03963             We fix here the problem that the thing needs to go through PutOut

```

```

03964 */
03965     m2 = m1 = *S->Patches; /* The m2 is to keep the compiler from complaining */
03966     while ( *m1 ) {
03967         if ( *m1 < 0 ) { /* Need to uncompress */
03968             i = -( *m1++ ); m2 += i; im = *m1+i+1;
03969             while ( i > 0 ) { *m1-- = *m2--; i--; }
03970             *m1 = im;
03971         }
03972 #ifdef WITHPTHREADS
03973         /* Check here (and in the following) that we are at ground level
03974         (so S == AT.S0) to use PutToMaster. Control can reach here,
03975         with AS.MasterSort, but with S != AT.S0, when the SortBots are
03976         adding PolyRatFun and the sorting of their arguments requires
03977         large buffer patches to be merged. In this case, terms escape
03978         the PolyRatFun argument and end up at ground level, if we use
03979         PutToMaster. */
03980         if ( AS.MasterSort && ( fout == AR.outfile ) && S == AT.S0 ) {
03981             im = PutToMaster(BHEAD m1);
03982         }
03983         else
03984 #endif
03985             if ( ( im = PutOut(BHEAD m1,&position,fout,1) ) < 0 ) goto ReturnError;
03986             ADDPOS(S->SizeInFile[par],im);
03987             m2 = m1;
03988             m1 += *m1;
03989         }
03990 #ifdef WITHPTHREADS
03991         if ( AS.MasterSort && ( fout == AR.outfile ) && S == AT.S0 ) {
03992             PutToMaster(BHEAD 0);
03993         }
03994         else
03995 #endif
03996             if ( FlushOut(&position,fout,1) ) goto ReturnError;
03997             ADDPOS(S->SizeInFile[par],1);
03998     }
03999     /* old code */
04000     length = (LONG) (*S->pStop) - (LONG) (*S->Patches) + sizeof(WORD);
04001     if ( WriteFile(fout->handle, (UBYTE *) (*S->Patches), length) != length )
04002         goto PatwCall;
04003     ADDPOS(position,length);
04004     ADDPOS(fout->PPosition,length);
04005     ADDPOS(fout->filesize,length);
04006     ADDPOS(S->SizeInFile[par],length/sizeof(WORD));
04007 #endif
04008     }
04009     else { /* File to file */
04010 #ifdef WITHZLIB
04011     /*
04012         Note: if we change FRONTSIZE we need to make the minimum value
04013         of SmallSize in AllocSort correspondingly larger or smaller.
04014         Theoretically we could get close to 2*AM.MaxTer!
04015     */
04016     #define FRONTSIZE (2*AM.MaxTer)
04017     WORD *copybuf = (WORD *) (((UBYTE *) (S->sBuffer)) + FRONTSIZE);
04018     WORD *copytop;
04019     SetupAllInputGZIP(S);
04020     m1 = m2 = copybuf;
04021     position2 = S->iPatches[0];
04022     while ( ( length = FillInputGZIP(fin,&position2,
04023         (UBYTE *) copybuf,
04024         (S->SmallSize*sizeof(WORD)-FRONTSIZE),0) ) > 0 ) {
04025         copytop = (WORD *) (((UBYTE *) copybuf)+length);
04026         while ( *m1 && ( ( *m1 > 0 && m1+m1 < copytop ) ||
04027             ( *m1 < 0 && ( m1+1 < copytop ) && ( m1+m1[1]+1 < copytop ) ) ) )
04028             /*
04029             22-jun-2013 JV Extremely nasty bug that has been around for a while.
04030             What if the end is in the remaining part? We will loose terms!
04031             while ( *m1 && ( (WORD *) (((UBYTE *) (m1)) + AM.MaxTer ) < S->sTop2 ) )
04032             */
04033             {
04034                 if ( *m1 < 0 ) { /* Need to uncompress */
04035                     i = -( *m1++ ); m2 += i; im = *m1+i+1;
04036                     while ( i > 0 ) { *m1-- = *m2--; i--; }
04037                     *m1 = im;
04038                 }
04039 #ifdef WITHPTHREADS
04040                 if ( AS.MasterSort && ( fout == AR.outfile ) && S == AT.S0 ) {
04041                     im = PutToMaster(BHEAD m1);
04042                 }
04043                 else
04044 #endif
04045                     if ( ( im = PutOut(BHEAD m1,&position,fout,1) ) < 0 ) goto ReturnError;
04046                     ADDPOS(S->SizeInFile[par],im);
04047                     m2 = m1;
04048                     m1 += *m1;
04049                 }
04050             if ( m1 < copytop && *m1 == 0 ) break;

```

```

04051 /*
04052         Now move the remaining part 'back'
04053 */
04054         m3 = copybuf;
04055         m1 = copytop;
04056         while ( m1 > m2 ) *--m3 = *--m1;
04057         m2 = m3;
04058         m1 = m2 + *m2;
04059     }
04060     if ( length < 0 ) {
04061         MLOCK(ErrorMessageLock);
04062         MesPrint("Readerror");
04063         goto PatCall2;
04064     }
04065 #ifdef WITHPTHREADS
04066     if ( AS.MasterSort && ( fout == AR.outfile ) && S == AT.S0 ) {
04067         PutToMaster(BHEAD 0);
04068     }
04069     else
04070 #endif
04071     if ( FlushOut(&position,fout,1) ) goto ReturnError;
04072     ADDPOS(S->SizeInFile[par],1);
04073 #else
04074 /* old code */
04075     SeekFile(fin->handle,&(S->iPatches[0]),SEEK_SET); /* needed for stage4 */
04076     while ( ( length = ReadFile(fin->handle,
04077         (UBYTE *) (S->sBuffer),S->SmallEsize*sizeof(WORD)) ) > 0 ) {
04078         if ( WriteFile(fout->handle,(UBYTE *) (S->sBuffer),length) != length )
04079             goto PatwCall;
04080         ADDPOS(position,length);
04081         ADDPOS(fout->PPosition,length);
04082         ADDPOS(fout->filesize,length);
04083         ADDPOS(S->SizeInFile[par],length/sizeof(WORD));
04084     }
04085     if ( length < 0 ) {
04086         MLOCK(ErrorMessageLock);
04087         MesPrint("Readerror");
04088         goto PatCall2;
04089     }
04090 #endif
04091     }
04092     goto EndOfAll;
04093 }
04094 else if ( S->lPatch > 0 ) {
04095
04096     /* More than one patch. Construct the tree. */
04097
04098     lpat = 1;
04099     do { lpat *= 2; } while ( lpat < S->lPatch );
04100     mpat = ( lpat » 1 ) - 1;
04101     k = lpat - S->lPatch;
04102
04103     /* k is the number of empty places in the tree. they will
04104        be at the even positions from 2 to 2*k */
04105
04106     for ( i = 1; i < lpat; i++ ) {
04107         S->tree[i] = -1;
04108     }
04109     for ( i = 1; i <= k; i++ ) {
04110         im = ( i * 2 ) - 1;
04111         poin[im] = S->Patches[i-1];
04112         poin2[im] = poin[im] + *(poin[im]);
04113         S->used[i] = im;
04114         S->ktoi[im] = i-1;
04115         S->tree[mpat+i] = 0;
04116         poin[im-1] = poin2[im-1] = 0;
04117     }
04118     for ( i = (k*2)+1; i <= lpat; i++ ) {
04119         S->used[i-k] = i;
04120         S->ktoi[i] = i-k-1;
04121         poin[i] = S->Patches[i-k-1];
04122         poin2[i] = poin[i] + *(poin[i]);
04123     }
04124 /*
04125     the array poin tells the position of the i-th element of the S->tree
04126     'S->used' is a stack with the S->tree elements that need to be entered
04127     into the S->tree. at the beginning this is S->lPatch. during the
04128     sort there will be only very few elements.
04129     poin2 is the next value of poin. it has to be determined
04130     before the comparisons as the position or the size of the
04131     term indicated by poin may change.
04132     S->ktoi translates a S->tree element back to its stream number.
04133
04134     start the sort
04135 */
04136     level = S->lPatch;
04137

```

```

04138      /* introduce one term */
04139 OneTerm:
04140     k = S->used[level];
04141     i = k + lpat - 1;
04142     if ( !*(poin[k]) ) {
04143         do { if ( !( i >= 1 ) ) goto EndOfMerge; } while ( !S->tree[i] );
04144         if ( S->tree[i] == -1 ) {
04145             S->tree[i] = 0;
04146             level--;
04147             goto OneTerm;
04148         }
04149         k = S->tree[i];
04150         S->used[level] = k;
04151         S->tree[i] = 0;
04152     }
04153 /*
04154     move terms down the tree
04155 */
04156     while ( i >= 1 ) {
04157         if ( S->tree[i] > 0 ) {
04158             if ( ( c = CompareTerms(BHEAD poin[S->tree[i]],poin[k],(WORD)0) ) > 0 ) {
04159 /*
04160                 S->tree[i] is the smaller. Exchange and go on.
04161 */
04162                 S->used[level] = S->tree[i];
04163                 S->tree[i] = k;
04164                 k = S->used[level];
04165             }
04166             else if ( !c ) { /* Terms are equal */
04167                 S->TermsLeft--;
04168 /*
04169                 Here the terms are equal and their coefficients
04170                 have to be added.
04171 */
04172                 l1 = *( m1 = poin[S->tree[i]] );
04173                 l2 = *( m2 = poin[k] );
04174                 if ( S->PolyWise ) { /* Here we work with PolyFun */
04175                     WORD *ttl, *w;
04176                     ttl = m1;
04177                     m1 += S->PolyWise;
04178                     m2 += S->PolyWise;
04179                     if ( S->PolyFlag == 2 ) {
04180                         w = poly_ratfun_add(BHEAD m1,m2);
04181                         if ( *ttl + w[l1] - m1[l1] > AM.MaxTer/((LONG)sizeof(WORD)) ) {
04182                             MLOCK(ErrorMessageLock);
04183                             MesPrint("Term too complex in PolyRatFun addition. MaxTermSize of %101
04184 is too small",AM.MaxTer);
04185                             MUNLOCK(ErrorMessageLock);
04186                             Terminate(-1);
04187                         }
04188                         AT.WorkPointer = w;
04189                     }
04190                     else {
04191                         w = AT.WorkPointer;
04192                         if ( w + m1[l1] + m2[l1] > AT.WorkTop ) {
04193                             MLOCK(ErrorMessageLock);
04194                             MesPrint("A Workspace of %101 is too small",AM.WorkSize);
04195                             MUNLOCK(ErrorMessageLock);
04196                             Terminate(-1);
04197                         }
04198                         AddArgs(BHEAD m1,m2,w);
04199                     }
04200                     r1 = w[l1];
04201                     if ( r1 <= FUNHEAD
04202                         || ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 ) ) {
04203                         goto cancelled; }
04204                     if ( r1 == m1[l1] ) {
04205                         NCOPY(m1,w,r1);
04206                     }
04207                     else if ( r1 < m1[l1] ) {
04208                         r2 = m1[l1] - r1;
04209                         m2 = w + r1;
04210                         m1 += m1[l1];
04211                         while ( --r1 >= 0 ) *--m1 = *--m2;
04212                         m2 = m1 - r2;
04213                         r1 = S->PolyWise;
04214                         while ( --r1 >= 0 ) *--m1 = *--m2;
04215                         *m1 -= r2;
04216                         poin[S->tree[i]] = m1;
04217                     }
04218                     else {
04219                         r2 = r1 - m1[l1];
04220                         m2 = ttl - r2;
04221                         r1 = S->PolyWise;
04222                         m1 = ttl;
04223                         *m1 += r2;
04224                         poin[S->tree[i]] = m2;

```

```

04224             NCOPY(m2,m1,r1);
04225             r1 = w[1];
04226             NCOPY(m2,w,r1);
04227         }
04228     }
04229 #ifndef WITHFLOAT
04230     else if ( AT.SortFloatMode ) {
04231         WORD *term1, *term2;
04232         term1 = poin[S->tree[i]];
04233         term2 = poin[k];
04234         if ( MergeWithFloat(BHEAD &term1,&term2) == 0 )
04235             goto cancelled;
04236         poin[S->tree[i]] = term1;
04237     }
04238 #endif
04239     else {
04240         r1 = *( m1 += l1 - 1 );
04241         m1 -= ABS(r1) - 1;
04242         r1 = ( ( r1 > 0 ) ? (r1-1) : (r1+1) ) >> 1;
04243         r2 = *( m2 += l2 - 1 );
04244         m2 -= ABS(r2) - 1;
04245         r2 = ( ( r2 > 0 ) ? (r2-1) : (r2+1) ) >> 1;
04246
04247         if ( AddRat(BHEAD (UWORD *)m1,r1,(UWORD *)m2,r2,coef,&r3) ) {
04248             MLOCK(ErrorMessageLock);
04249             MesCall("MergePatches");
04250             MUNLOCK(ErrorMessageLock);
04251             SETERROR(-1)
04252         }
04253
04254         if ( AN.ncmod != 0 ) {
04255             if ( ( AC.modmode & POSNEG ) != 0 ) {
04256                 NormalModulus(coef,&r3);
04257             }
04258             else if ( BigLong(coef,r3,(UWORD *)AC.cmod,ABS(AN.ncmod)) >= 0 ) {
04259                 WORD ii;
04260                 SubPLon(coef,r3,(UWORD *)AC.cmod,ABS(AN.ncmod),coef,&r3);
04261                 coef[r3] = 1;
04262                 for ( ii = 1; ii < r3; ii++ ) coef[r3+ii] = 0;
04263             }
04264         }
04265         r3 *= 2;
04266         r33 = ( r3 > 0 ) ? ( r3 + 1 ) : ( r3 - 1 );
04267         if ( r3 < 0 ) r3 = -r3;
04268         if ( r1 < 0 ) r1 = -r1;
04269         r1 *= 2;
04270         r31 = r3 - r1;
04271         if ( !r3 ) { /* Terms cancel */
04272             cancelled:
04273             ul = S->used[level] = S->tree[i];
04274             S->tree[i] = -1;
04275             /*
04276              We skip to the next term in stream ul
04277             */
04278             im = *poin2[ul];
04279             if ( im < 0 ) {
04280                 r1 = poin2[ul][1] - im + 1;
04281                 m1 = poin2[ul] + 2;
04282                 m2 = poin[ul] - im + 1;
04283                 while ( ++im <= 0 ) *--m1 = *--m2;
04284                 *--m1 = r1;
04285                 poin2[ul] = m1;
04286                 im = r1;
04287             }
04288             poin[ul] = poin2[ul];
04289             ki = S->ktoi[ul];
04290             if ( !par && (poin[ul] + im + COMPINC) >= S->pStop[ki]
04291                 && im > 0 ) {
04292                 PutIn(fin,&(S->iPatches[ki]),S->Patches[ki],&(poin[ul]),ki);
04293             }
04294             else
04295                 ADDPOS(S->iPatches[ki],PutIn(fin,&(S->iPatches[ki]),
04296                     S->Patches[ki],&(poin[ul]),ki));
04297             #endif
04298             poin2[ul] = poin[ul] + im;
04299         }
04300         else {
04301             poin2[ul] += im;
04302         }
04303         S->used[++level] = k;
04304         S->TermsLeft--;
04305     }
04306     else if ( !r31 ) { /* copy coef into term1 */
04307         goto CopCof2;
04308     }
04309     else if ( r31 < 0 ) { /* copy coef into term1
04310                          and adjust the length of term1 */

```

```

04311         goto CopCoef;
04312     }
04313     else {
04314         /*
04315             this is the dreaded calamity.
04316             is there enough space?
04317         */
04318         if( (poin[S->tree[i]]+l1+r31) >= poin2[S->tree[i]] ) {
04319             /*
04320                 no space! now the special trick for which
04321                 we left 2*maxlng spaces open at the beginning
04322                 of each patch.
04323             */
04324             if ( (l1 + r31) > AM.MaxTer/((LONG)sizeof(WORD)) ) {
04325                 MLOCK(ErrorMessageLock);
04326                 MesPrint("Coefficient overflow during sort");
04327                 MUNLOCK(ErrorMessageLock);
04328                 goto ReturnError;
04329             }
04330             m2 = poin[S->tree[i]];
04331             m3 = ( poin[S->tree[i]] - r31 );
04332             do { *m3++ = *m2++; } while ( m2 < m1 );
04333             m1 = m3;
04334         }
04335         CopCoef:
04336         *(poin[S->tree[i]]) += r31;
04337         CopCoef2:
04338         m2 = (WORD *)coef; im = r3;
04339         NCOPY(m1,m2,im);
04340         *m1 = r33;
04341     }
04342 }
04343 /*
04344     Now skip to the next term in stream k.
04345 */
04346 NextTerm:
04347     im = poin2[k][0];
04348     if ( im < 0 ) {
04349         r1 = poin2[k][1] - im + 1;
04350         m1 = poin2[k] + 2;
04351         m2 = poin[k] - im + 1;
04352         while ( ++im <= 0 ) *--m1 = *--m2;
04353         *--m1 = r1;
04354         poin2[k] = m1;
04355         im = r1;
04356     }
04357     poin[k] = poin2[k];
04358     ki = S->ktoi[k];
04359     if ( !par && ( (poin[k] + im + COMPINC) >= S->pStop[ki] )
04360         && im > 0 ) {
04361         #ifdef WITHZLIB
04362             PutIn(fin,&(S->iPatches[ki]),S->Patches[ki],&(poin[k]),ki);
04363         #else
04364             ADDPOS(S->iPatches[ki],PutIn(fin,&(S->iPatches[ki]),
04365             S->Patches[ki],&(poin[k]),ki));
04366         #endif
04367         poin2[k] = poin[k] + im;
04368     }
04369     else {
04370         poin2[k] += im;
04371     }
04372     goto OneTerm;
04373 }
04374 }
04375 else if ( S->tree[i] < 0 ) {
04376     S->tree[i] = k;
04377     level--;
04378     goto OneTerm;
04379 }
04380 }
04381 /*
04382     found the smallest in the set. indicated by k.
04383     write to its destination.
04384 */
04385 #ifdef WITHPTHREADS
04386     if ( AS.MasterSort && ( fout == AR.outfile ) && S == AT.S0 ) {
04387         im = PutToMaster(BHEAD poin[k]);
04388     }
04389     else
04390 #endif
04391     if ( ( im = PutOut(BHEAD poin[k],&position,fout,1) ) < 0 ) {
04392         MLOCK(ErrorMessageLock);
04393         MesPrint("Called from MergePatches with k = %d (stream %d)",k,S->ktoi[k]);
04394         MUNLOCK(ErrorMessageLock);
04395         goto ReturnError;
04396     }
04397     ADDPOS(S->SizeInFile[par],im);

```

```

04398         goto NextTerm;
04399     }
04400     else {
04401         goto NormalReturn;
04402     }
04403 EndOfMerge:
04404 #ifdef WITHPTHREADS
04405     if ( AS.MasterSort && ( fout == AR.outfile ) && S == AT.S0 ) {
04406         PutToMaster(BHEAD 0);
04407     }
04408     else
04409 #endif
04410     if ( FlushOut(&position,fout,1) ) goto ReturnError;
04411     ADDPOS(S->SizeInFile[par],1);
04412 EndOfAll:
04413     if ( par == 1 ) { /* Set the fpatch pointers */
04414 #ifdef WITHZLIB
04415         SeekFile(fout->handle,&position,SEEK_CUR);
04416 #endif
04417         (S->fPatchN)++;
04418         S->fPatches[S->fPatchN] = position;
04419     }
04420     if ( par == 0 && fout != AR.outfile ) {
04421 /*
04422         Output went to sortfile. We have two possibilities:
04423         1: We are not finished with the current in-out cycle
04424            In that case we should pop to the next set of patches
04425         2: We finished a cycle and should clean up the in file
04426            Then we restart the sort.
04427 */
04428         (S->fPatchN)++;
04429         S->fPatches[S->fPatchN] = position;
04430         if ( ISNOTZEROPOS(AN.OldPosIn) ) { /* We are not done */
04431
04432             SeekFile(fin->handle,&(AN.OldPosIn),SEEK_SET);
04433 /*
04434             We don't need extra provisions for the zlib compression here.
04435             If part of an expression has been sorted, the whole has been so.
04436             This means that S->fpincompressed[] will remain the same
04437 */
04438             if ( (ULONG)ReadFile(fin->handle,(UBYTE *)(&(S->inNum)),(LONG)sizeof(WORD)) !=
04439                 sizeof(WORD)
04440             || (ULONG)ReadFile(fin->handle,(UBYTE *)(&AN.OldPosIn),(LONG)sizeof(POSITION)) !=
04441                 sizeof(POSITION)
04442             || (ULONG)ReadFile(fin->handle,(UBYTE *)S->iPatches,(LONG)((S->inNum)+1)
04443                 *sizeof(POSITION)) != ((S->inNum)+1)*sizeof(POSITION) ) {
04444                 MLOCK(ErrorMessageLock);
04445                 MesPrint("Read error fourth stage sorting");
04446                 MUNLOCK(ErrorMessageLock);
04447                 goto ReturnError;
04448             }
04449             *rr = 0;
04450 #ifdef WITHZLIB
04451             for ( i = 0; i < S->inNum; i++ ) {
04452                 S->fPatchesStop[i] = S->iPatches[i+1];
04453 #ifdef GZIPDEBUG
04454                 MLOCK(ErrorMessageLock);
04455                 MesPrint("%w fPatchesStop[%d] = %10p",i,&(S->fPatchesStop[i]));
04456                 MUNLOCK(ErrorMessageLock);
04457 #endif
04458             }
04459 #endif
04460             goto ConMer;
04461         }
04462     }
04463 /*
04464     if ( fin == &(AR.FoStage4[0]) ) {
04465         s = (UBYTE *) (fin->name); while ( *s ) s++;
04466         if ( AR.Stage4Name == 1 ) s[-1] -= 1;
04467         else
04468             s[-1] += 1;
04469     }
04470 */
04471 /* TruncateFile(fin->handle); */
04472 /* UpdateMaxSize(); */
04473 #ifdef WITHZLIB
04474     ClearSortGZIP(fin);
04475 #endif
04476     CloseFile(fin->handle);
04477     remove(fin->name); /* Gives disk space free again. */
04478 #ifdef GZIPDEBUG
04479     MLOCK(ErrorMessageLock);
04480     MesPrint("%w MergePatches removed in file %s",fin->name);
04481     MUNLOCK(ErrorMessageLock);
04482 #endif
04483 /*
04484     if ( fin == &(AR.FoStage4[0]) ) {
04485         s = (UBYTE *) (fin->name); while ( *s ) s++;

```



```

04485         if ( AR.Stage4Name == 1 ) s[-1] += 1;
04486         else                       s[-1] -= 1;
04487     }
04488 */
04489     fin->handle = -1;
04490     { FILEHANDLE *ff = fin; fin = fout; fout = ff; }
04491     PUTZERO(S->SizeInFile[0]);
04492     goto NewMerge;
04493 }
04494 }
04495 if ( par == 0 ) {
04496 /*      TruncateFile(fin->handle); */
04497     UpdateMaxSize();
04498 #ifdef WITHZLIB
04499     ClearSortGZIP(fin);
04500 #endif
04501     CloseFile(fin->handle);
04502     remove(fin->name);
04503     fin->handle = -1;
04504 #ifdef GZIPDEBUG
04505     MLOCK(ErrorMessageLock);
04506     MesPrint("%w MergePatches removed in file %s", fin->name);
04507     MUNLOCK(ErrorMessageLock);
04508 #endif
04509 }
04510 NormalReturn:
04511 #ifdef WITHZLIB
04512     AR.gzipCompress = oldgzipCompress;
04513 #endif
04514     return(0);
04515 ReturnError:
04516 #ifdef WITHZLIB
04517     AR.gzipCompress = oldgzipCompress;
04518 #endif
04519     return(-1);
04520 #ifndef WITHZLIB
04521 PatwCall:
04522     MLOCK(ErrorMessageLock);
04523     MesPrint("Error while writing to file.");
04524     goto PatCall2;
04525 #endif
04526 PatCall:;
04527     MLOCK(ErrorMessageLock);
04528 PatCall2:;
04529     MesCall("MergePatches");
04530     MUNLOCK(ErrorMessageLock);
04531 #ifdef WITHZLIB
04532     AR.gzipCompress = oldgzipCompress;
04533 #endif
04534     SETERROR(-1)
04535 }
04536
04537 /*
04538     #] MergePatches :
04539     #[ StoreTerm :          WORD StoreTerm(term)
04540 */
04550 int StoreTerm(PHEAD WORD *term)
04551 {
04552     GETBIDENTITY
04553     SORTING *S = AT.SS;
04554     WORD **ss, *lfill, j, *t;
04555     POSITION pp;
04556     LONG lSpace, sSpace, RetCode, over, tover;
04557
04558     if ( ( ( AP.PreDebug & DUMPTOSORT ) == DUMPTOSORT ) && AR.sLevel == 0 ) {
04559 #ifdef WITHPTHREADS
04560         snprintf((char *) (THRbuf), 100, "StoreTerm(%d)", AT.identity);
04561         PrintTerm(term, (char *) (THRbuf));
04562     #else
04563         PrintTerm(term, "StoreTerm");
04564     #endif
04565     }
04566     if ( AM.exitflag && AR.sLevel == 0 ) return(0);
04567     S->sFill = *(S->PoinFill);
04568     if ( S->sTerms >= S->TermsInSmall || ( S->sFill + *term ) >= S->sTop ) {
04569 /*
04570     The small buffer is full. It has to be sorted and written.
04571 */
04572         tover = over = S->sTerms;
04573         ss = S->sPointer;
04574         ss[over] = 0;
04575 #ifdef SPLITTIME
04576         PrintTime((UBYTE *) "Before SplitMerge");
04577 #endif
04578         ss[SplitMerge(BHEAD ss, over)] = 0;
04579 #ifdef SPLITTIME
04580         PrintTime((UBYTE *) "After SplitMerge");

```

```

04581 #endif
04582     sSpace = 0;
04583     if ( over > 0 ) {
04584         sSpace = ComPress(ss,&RetCode);
04585         S->TermsLeft -= over - RetCode;
04586     }
04587     sSpace++;
04588
04589     lSpace = sSpace + (S->lFill - S->lBuffer)
04590         - (AM.MaxTer/sizeof(WORD))*((LONG)S->lPatch);
04591     SETBASEPOSITION(pp,lSpace);
04592     MULPOS(pp,sizeof(WORD));
04593     if ( S->file.handle >= 0 ) {
04594         ADD2POS(pp,S->fPatches[S->fPatchN]);
04595     }
04596     if ( S == AT.S0 ) { /* Only statistics at ground level */
04597         WriteStats(&pp,STATSSPLITMERGE,CHECKLOGTYPE);
04598     }
04599     if ( ( S->lPatch >= S->MaxPatches ) ||
04600         ( ( (WORD *)(((UBYTE *) (S->lFill + sSpace)) + 2*AM.MaxTer ) ) >= S->lTop ) ) {
04601 /*
04602     The large buffer is too full. Merge and write it
04603 */
04604     if ( MergePatches(1) ) goto StoreCall;
04605 /*
04606     pp = S->SizeInFile[1];
04607     ADDPOS(pp,sSpace);
04608     MULPOS(pp,sizeof(WORD));
04609 */
04610     SETBASEPOSITION(pp,sSpace);
04611     MULPOS(pp,sizeof(WORD));
04612     ADD2POS(pp,S->fPatches[S->fPatchN]);
04613
04614     if ( S == AT.S0 ) { /* Only statistics at ground level */
04615         WriteStats(&pp,STATSMERGETOFILE,CHECKLOGTYPE);
04616     }
04617     S->lPatch = 0;
04618     S->lFill = S->lBuffer;
04619 }
04620 S->Patches[S->lPatch++] = S->lFill;
04621 lfill = (WORD *)(((UBYTE *) (S->lFill)) + AM.MaxTer);
04622 if ( tover > 0 ) {
04623     ss = S->sPointer;
04624     while ( ( t = *ss++ ) != 0 ) {
04625         j = *t;
04626         if ( j < 0 ) j = t[1] + 2;
04627         while ( --j >= 0 ){
04628             *lfill++ = *t++;
04629         }
04630     }
04631 }
04632 *lfill++ = 0;
04633 S->lFill = lfill;
04634 S->sTerms = 0;
04635 S->PoinFill = S->sPointer;
04636 *(S->PoinFill) = S->sFill = S->sBuffer;
04637 }
04638 j = *term;
04639 while ( --j >= 0 ) *S->sFill++ = *term++;
04640 S->sTerms++;
04641 S->GenTerms++;
04642 S->TermsLeft++;
04643 **S->PoinFill = S->sFill;
04644
04645 return(0);
04646
04647 StoreCall:
04648     MLOCK(ErrorMessageLock);
04649     MesCall("StoreTerm");
04650     MUNLOCK(ErrorMessageLock);
04651     SETERROR(-1)
04652 }
04653
04654 /*
04655     #] StoreTerm :
04656     #[ StageSort :                void StageSort(FILEHANDLE *fout)
04657 */
04664 void StageSort(FILEHANDLE *fout)
04665 {
04666     GETIDENTITY
04667     SORTING *S = AT.SS;
04668     if ( S->fPatchN >= S->MaxFpatches ) {
04669         POSITION position;
04670         if ( S != AT.S0 ) {
04671 /*
04672     There are no proper provisions for stage 4 or higher sorts
04673     for function arguments and $ variables. The reason:

```

```

04674         The current code maps out the patches, based on the size of
04675         the buffers in the FoStage4 structs, while they are used
04676         inside the S->file struct that may have far smaller buffers.
04677         By itself that might still be repairable, but it goes completely
04678         wrong when during the sort polyRatFuns have to be added and they
04679         would go into stage4 (very rare but possible).
04680         The only really correct solution would be to put FoStage4 structs
04681         in all sort levels. Messy. (JV 8-oct-2018).
04682     */
04683     MLOCK(ErrorMessageLock);
04684     MesPrint("Currently Stage 4 sorts are not allowed for function arguments or $
variables.");
04685     MesPrint("Please increase correspondingsorting parameters (sub-) in the setup.");
04686     MUNLOCK(ErrorMessageLock);
04687     Terminate(-1);
04688 }
04689 PUTZERO(position);
04690 MLOCK(ErrorMessageLock);
04691 #ifdef WITHPTHREADS
04692     MesPrint("StageSort in thread %d",identity);
04693 #elif defined(WITHMPI)
04694     MesPrint("StageSort in process %d",PF.me);
04695 #else
04696     MesPrint("StageSort");
04697 #endif
04698     MUNLOCK(ErrorMessageLock);
04699     SeekFile(fout->handle,&position,SEEK_END);
04700 /*
04701     No extra compression data has to be written.
04702     S->fpincompressed should remain valid.
04703 */
04704     if ( (ULONG)WriteFile(fout->handle, (UBYTE *) (&(S->fPatchN)), (LONG) sizeof(WORD)) !=
sizeof(WORD)
04705         || (ULONG)WriteFile(fout->handle, (UBYTE *) (&(AN.OldPosOut)), (LONG) sizeof(POSITION)) !=
sizeof(POSITION)
04706         || (ULONG)WriteFile(fout->handle, (UBYTE *) (S->fPatches), (LONG) (S->fPatchN+1)
*sizeof(POSITION)) != (S->fPatchN+1)*sizeof(POSITION) ) {
04707         MLOCK(ErrorMessageLock);
04708         MesPrint("Write error while staging sort. Disk full?");
04709         MUNLOCK(ErrorMessageLock);
04710         Terminate(-1);
04711     }
04712     AN.OldPosOut = position;
04713     fout->filesize = position;
04714     ADDPOS(fout->filesize, (S->fPatchN+2)*sizeof(POSITION) + sizeof(WORD));
04715     fout->PPosition = fout->filesize;
04716     S->fPatches[0] = fout->filesize;
04717     S->fPatchN = 0;
04718
04719     if ( AR.FoStage4[0].PObuffer == 0 ) {
04720         AR.FoStage4[0].PObuffer = (WORD *)Malloc1(AR.FoStage4[0].POsize*sizeof(WORD)
, "Stage 4 buffer");
04721         AR.FoStage4[0].POfill = AR.FoStage4[0].PObuffer;
04722         AR.FoStage4[0].POstop = AR.FoStage4[0].PObuffer
+ AR.FoStage4[0].POsize/sizeof(WORD);
04723     }
04724     #ifdef WITHPTHREADS
04725         AR.FoStage4[0].pthreadlock = dummylock;
04726     #endif
04727
04728     if ( AR.FoStage4[1].PObuffer == 0 ) {
04729         AR.FoStage4[1].PObuffer = (WORD *)Malloc1(AR.FoStage4[1].POsize*sizeof(WORD)
, "Stage 4 buffer");
04730         AR.FoStage4[1].POfill = AR.FoStage4[1].PObuffer;
04731         AR.FoStage4[1].POstop = AR.FoStage4[1].PObuffer
+ AR.FoStage4[1].POsize/sizeof(WORD);
04732     }
04733     #ifdef WITHPTHREADS
04734         AR.FoStage4[1].pthreadlock = dummylock;
04735     #endif
04736
04737     }
04738     S->stage4 = 1;
04739 }
04740
04741 /*
04742     #] StageSort :
04743     #[ SortWild :          WORD SortWild(w,nw)
04744 */
04745 int SortWild(WORD *w, WORD nw)
04746 {
04747     GETIDENTITY
04748     WORD *v, *s, *m, k, i;
04749     WORD *pSkrat, *stop, *sv;
04750     int error = 0;
04751     pSkrat = AT.WorkPointer;
04752     if ( ( AT.WorkPointer + 8 * AM.MaxWildcards ) >= AT.WorkTop ) {
04753         MLOCK(ErrorMessageLock);
04754         MesWork();
04755     }

```

```

04773     MUNLOCK(ErrorMessageLock);
04774     return(-1);
04775 }
04776 stop = w + nw;
04777 i = 0;
04778 while ( i < nw ) {
04779     m = w + i;
04780     v = m + m[1];
04781     while ( v < stop && (
04782         *v == FROMSET || *v == SETTONUM || *v == LOADDOLLAR ) ) v += v[1];
04783     while ( v < stop ) {
04784         if ( *v >= 0 ) {
04785             if ( AM.Ordering[*v] < AM.Ordering[*m] ) {
04786                 m = v;
04787             }
04788             else if ( *v == *m ) {
04789                 if ( v[2] < m[2] ) {
04790                     m = v;
04791                 }
04792                 else if ( v[2] == m[2] ) {
04793                     s = m + m[1];
04794                     sv = v + v[1];
04795                     if ( s < stop && ( *s == FROMSET
04796                         || *s == SETTONUM || *s == LOADDOLLAR ) ) {
04797                         if ( sv < stop && ( *sv == FROMSET
04798                             || *sv == SETTONUM || *sv == LOADDOLLAR ) ) {
04799                             if ( s[2] != sv[2] ) {
04800                                 error = -1;
04801                                 MLOCK(ErrorMessageLock);
04802                                 MesPrint("&Wildcard set conflict");
04803                                 MUNLOCK(ErrorMessageLock);
04804                             }
04805                         }
04806                         *v = -1;
04807                     }
04808                     else {
04809                         if ( sv < stop && ( *sv == FROMSET
04810                             || *sv == SETTONUM || *sv == LOADDOLLAR ) ) {
04811                             *m = -1;
04812                             m = v;
04813                         }
04814                         else {
04815                             *v = -1;
04816                         }
04817                     }
04818                 }
04819             }
04820         }
04821         v += v[1];
04822         while ( v < stop && ( *v == FROMSET
04823             || *v == SETTONUM || *v == LOADDOLLAR ) ) v += v[1];
04824     }
04825     s = pScrat;
04826     v = m;
04827     k = m[1];
04828     NCOPY(s,m,k);
04829     while ( m < stop && ( *m == FROMSET
04830         || *m == SETTONUM || *m == LOADDOLLAR ) ) {
04831         k = m[1];
04832         NCOPY(s,m,k);
04833     }
04834     *v = -1;
04835     pScrat = s;
04836     i = 0;
04837     while ( i < nw && ( w[i] < 0 || w[i] == FROMSET
04838         || w[i] == SETTONUM || w[i] == LOADDOLLAR ) ) i += w[i+1];
04839 }
04840 AC.NwildC = k = WORDDIF(pScrat,AT.WorkPointer);
04841 s = AT.WorkPointer;
04842 m = w;
04843 NCOPY(m,s,k);
04844 AC.WildC = m;
04845 return(error);
04846 }
04847
04848 /*
04849     #] SortWild :
04850     #[ CleanUpSort :          void CleanUpSort(num)
04851 */
04856 void CleanUpSort(int num)
04857 {
04858     GETIDENTITY
04859     SORTING *S;
04860     int minnum = num, i;
04861     if ( AN.FunSorts ) {
04862         if ( num == -1 ) {
04863             if ( AN.MaxFunSorts > 3 ) {

```

```

04864         minnum = (AN.MaxFunSorts+4)/2;
04865     }
04866     else minnum = 4;
04867 }
04868 else if ( minnum == 0 ) minnum = 1;
04869 for ( i = minnum; i < AN.NumFunSorts; i++ ) {
04870     S = AN.FunSorts[i];
04871     if ( S ) {
04872         if ( S->file.handle >= 0 ) {
04873             /* TruncateFile(S->file.handle); */
04874             UpdateMaxSize();
04875 #ifdef WITHZLIB
04876             ClearSortGZIP(&(S->file));
04877 #endif
04878             CloseFile(S->file.handle);
04879             S->file.handle = -1;
04880             remove(S->file.name);
04881 #ifdef GZIPDEBUG
04882             MLOCK(ErrorMessageLock);
04883             MesPrint("%w CleanUpSort removed file %s",S->file.name);
04884             MUNLOCK(ErrorMessageLock);
04885 #endif
04886         }
04887         M_free(S->sPointer, "CleanUpSort: sPointer");
04888         M_free(S->Patches, "CleanUpSort: Patches");
04889         M_free(S->pStop, "CleanUpSort: pStop");
04890         M_free(S->poina, "CleanUpSort: poina");
04891         M_free(S->poin2a, "CleanUpSort: poin2a");
04892         M_free(S->fPatches, "CleanUpSort: fPatches");
04893         M_free(S->fPatchesStop, "CleanUpSort: fPatchesStop");
04894         M_free(S->inPatches, "CleanUpSort: inPatches");
04895         M_free(S->tree, "CleanUpSort: tree");
04896         M_free(S->used, "CleanUpSort: used");
04897 #ifdef WITHZLIB
04898         M_free(S->fpcompressed, "CleanUpSort: fpcompressed");
04899         M_free(S->fpincompressed, "CleanUpSort: fpincompressed");
04900 #endif
04901         M_free(S->ktoi, "CleanUpSort: ktoi");
04902         M_free(S->lBuffer, "CleanUpSort: lBuffer+sBuffer");
04903         M_free(S->file.PObuffer, "CleanUpSort: PObuffer");
04904         M_free(S, "CleanUpSort: sorting struct");
04905     }
04906     AN.FunSorts[i] = 0;
04907 }
04908 AN.MaxFunSorts = minnum;
04909 if ( num == 0 ) {
04910     S = AN.FunSorts[0];
04911     if ( S ) {
04912         if ( S->file.handle >= 0 ) {
04913             /* TruncateFile(S->file.handle); */
04914             UpdateMaxSize();
04915 #ifdef WITHZLIB
04916             ClearSortGZIP(&(S->file));
04917 #endif
04918             CloseFile(S->file.handle);
04919             S->file.handle = -1;
04920             remove(S->file.name);
04921 #ifdef GZIPDEBUG
04922             MLOCK(ErrorMessageLock);
04923             MesPrint("%w CleanUpSort removed file %s",S->file.name);
04924             MUNLOCK(ErrorMessageLock);
04925 #endif
04926         }
04927     }
04928 }
04929 }
04930 for ( i = 0; i < 2; i++ ) {
04931     if ( AR.FoStage4[i].handle >= 0 ) {
04932         UpdateMaxSize();
04933 #ifdef WITHZLIB
04934         ClearSortGZIP(&(AR.FoStage4[i]));
04935 #endif
04936         CloseFile(AR.FoStage4[i].handle);
04937         remove(AR.FoStage4[i].name);
04938         AR.FoStage4[i].handle = -1;
04939 #ifdef GZIPDEBUG
04940         MLOCK(ErrorMessageLock);
04941         MesPrint("%w CleanUpSort removed stage4 file %s",AR.FoStage4[i].name);
04942         MUNLOCK(ErrorMessageLock);
04943 #endif
04944     }
04945 }
04946 }
04947
04948 /*
04949 #] CleanUpSort :
04950 #[ LowerSortLevel :         void LowerSortLevel()

```

```

04951 */
04956 void LowerSortLevel(void)
04957 {
04958     GETIDENTITY
04959     if ( AR.sLevel >= 0 ) {
04960         AR.sLevel--;
04961         if ( AR.sLevel >= 0 ) AT.SS = AN.FunSorts[AR.sLevel];
04962     }
04963 }
04964
04965 /*
04966     #] LowerSortLevel :
04967     #[ PolyRatFunSpecial :
04968
04969     Keeps only the most divergent term in AR.PolyFunVar
04970     We assume that the terms are already in that notation.
04971 */
04972
04973 WORD *PolyRatFunSpecial(PHEAD WORD *t1, WORD *t2)
04974 {
04975     WORD *oldworkpointer = AT.WorkPointer, *t, *r;
04976     WORD expl, exp2;
04977     int i;
04978     t = t1+FUNHEAD;
04979     if ( *t == -SYMBOL ) {
04980         if ( t[1] != AR.PolyFunVar ) goto Illegal;
04981         expl = 1;
04982         if ( t[2] != -SNUMBER ) goto Illegal;
04983         t[3] = 1;
04984     }
04985     else if ( *t == -SNUMBER ) {
04986         t[1] = 1;
04987         t += 2;
04988         if ( *t == -SYMBOL ) {
04989             if ( t[1] != AR.PolyFunVar ) goto Illegal;
04990             expl = -1;
04991         }
04992         else if ( *t == -SNUMBER ) {
04993             t[1] = 1;
04994             expl = 0;
04995         }
04996         else if ( *t == ARGHEAD+8 && t[ARGHEAD] == 8 && t[ARGHEAD+1] == SYMBOL
04997             && t[ARGHEAD+3] == AR.PolyFunVar ) {
04998             t[ARGHEAD+5] = 1;
04999             t[ARGHEAD+6] = 1;
05000             t[ARGHEAD+7] = 3;
05001             expl = -t[ARGHEAD+4];
05002         }
05003         else goto Illegal;
05004     }
05005     else if ( *t == ARGHEAD+8 && t[ARGHEAD] == 8 && t[ARGHEAD+1] == SYMBOL
05006         && t[ARGHEAD+3] == AR.PolyFunVar ) {
05007         t[ARGHEAD+5] = 1;
05008         t[ARGHEAD+6] = 1;
05009         t[ARGHEAD+7] = 3;
05010         expl = t[ARGHEAD+4];
05011         t += *t;
05012         if ( *t != -SNUMBER ) goto Illegal;
05013         t[1] = 1;
05014     }
05015     else goto Illegal;
05016
05017     t = t2+FUNHEAD;
05018     if ( *t == -SYMBOL ) {
05019         if ( t[1] != AR.PolyFunVar ) goto Illegal;
05020         exp2 = 1;
05021         if ( t[2] != -SNUMBER ) goto Illegal;
05022         t[3] = 1;
05023     }
05024     else if ( *t == -SNUMBER ) {
05025         t[1] = 1;
05026         t += 2;
05027         if ( *t == -SYMBOL ) {
05028             if ( t[1] != AR.PolyFunVar ) goto Illegal;
05029             exp2 = -1;
05030         }
05031         else if ( *t == -SNUMBER ) {
05032             t[1] = 1;
05033             exp2 = 0;
05034         }
05035         else if ( *t == ARGHEAD+8 && t[ARGHEAD] == 8 && t[ARGHEAD+1] == SYMBOL
05036             && t[ARGHEAD+3] == AR.PolyFunVar ) {
05037             t[ARGHEAD+5] = 1;
05038             t[ARGHEAD+6] = 1;
05039             t[ARGHEAD+7] = 3;
05040             exp2 = -t[ARGHEAD+4];
05041         }

```

```

05042         else goto Illegal;
05043     }
05044     else if ( *t == ARGHEAD+8 && t[ARGHEAD] == 8 && t[ARGHEAD+1] == SYMBOL
05045         && t[ARGHEAD+3] == AR.PolyFunVar ) {
05046         t[ARGHEAD+5] = 1;
05047         t[ARGHEAD+6] = 1;
05048         t[ARGHEAD+7] = 3;
05049         exp2 = t[ARGHEAD+4];
05050         t += *t;
05051         if ( *t != -SNUMBER ) goto Illegal;
05052         t[1] = 1;
05053     }
05054     else goto Illegal;
05055
05056     if ( exp1 <= exp2 ) { i = t1[1]; r = t1; }
05057     else { i = t2[1]; r = t2; }
05058     t = oldworkpointer;
05059     NCOPY(t,r,i)
05060
05061     return(oldworkpointer);
05062 Illegal:
05063     MesPrint("Illegal occurrence of PolyRatFun with divergent option");
05064     Terminate(-1);
05065     return(0);
05066 }
05067
05068 /*
05069     #] PolyRatFunSpecial :
05070     #[ SimpleSplitMerge :
05071
05072     Sorts an array of WORDs. No adding of equal objects.
05073 */
05074
05075 void SimpleSplitMergeRec(WORD *array,WORD num,WORD *auxarray)
05076 {
05077     WORD n1,n2,i,j,k,*t1,*t2;
05078     if ( num < 2 ) return;
05079     if ( num == 2 ) {
05080         if ( array[0] > array[1] ) {
05081             EXCH(array[0],array[1])
05082         }
05083         return;
05084     }
05085     n1 = num/2;
05086     n2 = num - n1;
05087     SimpleSplitMergeRec(array,n1,auxarray);
05088     SimpleSplitMergeRec(array+n1,n2,auxarray);
05089     if ( array[n1-1] <= array[n1] ) return;
05090
05091     t1 = array; t2 = auxarray; i = n1; NCOPY(t2,t1,i);
05092     i = 0; j = n1; k = 0;
05093     while ( i < n1 && j < num ) {
05094         if ( auxarray[i] <= array[j] ) { array[k++] = auxarray[i++]; }
05095         else { array[k++] = array[j++]; }
05096     }
05097     while ( i < n1 ) array[k++] = auxarray[i++];
05098 /*
05099     Remember: remnants of j are still in place!
05100 */
05101 }
05102
05103 void SimpleSplitMerge(WORD *array,WORD num)
05104 {
05105     WORD *auxarray = Malloc1(sizeof(WORD)*num/2,"SimpleSplitMerge");
05106     SimpleSplitMergeRec(array,num,auxarray);
05107     M_free(auxarray,"SimpleSplitMerge");
05108 }
05109
05110 /*
05111     #] SimpleSplitMerge :
05112     #[ BinarySearch :
05113
05114     Searches in the sorted array with length num for the object x.
05115     If x is in the list, it returns the number of the array element
05116     that matched. If it is not in the list, it returns -1.
05117     If there are identical objects in the list, which one will
05118     match is quasi random.
05119 */
05120
05121 WORD BinarySearch(WORD *array,WORD num,WORD x)
05122 {
05123     WORD i, bot, top, med;
05124     if ( num < 8 ) {
05125         for ( i = 0; i < num; i++ ) if ( array[i] == x ) return(i);
05126         return(-1);
05127     }
05128     if ( array[0] > x || array[num-1] < x ) return(-1);

```

```


05129     bot = 0; top = num-1; med = (top+bot)/2;
05130     do {
05131         if ( array[med] == x ) return(med);
05132         if ( array[med] < x ) { bot = med+1; }
05133         else { top = med-1; }
05134         med = (top+bot)/2;
05135     } while ( med >= bot && med <= top );
05136     return(-1);
05137 }
05138
05139 /*
05140     #] BinarySearch :
05141     #] SortUtilities :
05142 */

```

4.133 spectator.c File Reference

```
#include "form3.h"
```

Include dependency graph for spectator.c:

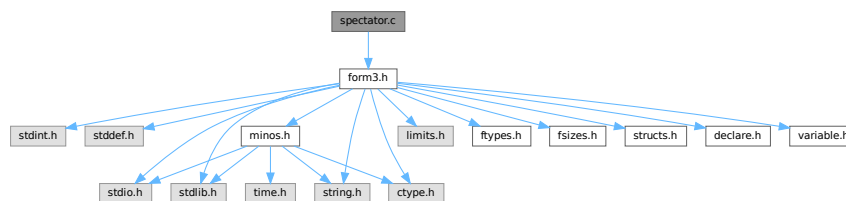

Functions

- int [CoCreateSpectator](#) (UBYTE *inp)
- int [CoToSpectator](#) (UBYTE *inp)
- int [CoRemoveSpectator](#) (UBYTE *inp)
- int [CoEmptySpectator](#) (UBYTE *inp)
- int [PutInSpectator](#) (WORD *term, WORD specnum)
- void [FlushSpectators](#) (void)
- int [CoCopySpectator](#) (UBYTE *inp)
- WORD [GetFromSpectator](#) (WORD *term, WORD specnum)
- void [ClearSpectators](#) (WORD par)

4.133.1 Detailed Description

File contains the code for the spectator files and their control.

Definition in file [spectator.c](#).

4.133.2 Function Documentation

4.133.2.1 CoCreateSpectator()

```

int CoCreateSpectator (
    UBYTE * inp )

```

Definition at line 89 of file [spectator.c](#).

4.133.2.2 CoToSpectator()

```
int CoToSpectator (
    UBYTE * inp )
```

Definition at line 181 of file [spectator.c](#).

4.133.2.3 CoRemoveSpectator()

```
int CoRemoveSpectator (
    UBYTE * inp )
```

Definition at line 233 of file [spectator.c](#).

4.133.2.4 CoEmptySpectator()

```
int CoEmptySpectator (
    UBYTE * inp )
```

Definition at line 293 of file [spectator.c](#).

4.133.2.5 PutInSpectator()

```
int PutInSpectator (
    WORD * term,
    WORD specnum )
```

Definition at line 345 of file [spectator.c](#).

4.133.2.6 FlushSpectators()

```
void FlushSpectators (
    void )
```

Definition at line 402 of file [spectator.c](#).

4.133.2.7 CoCopySpectator()

```
int CoCopySpectator (
    UBYTE * inp )
```

Definition at line 459 of file [spectator.c](#).

4.133.2.8 GetFromSpectator()

```
WORD GetFromSpectator (
    WORD * term,
    WORD specnum )
```

Definition at line 601 of file [spectator.c](#).

4.133.2.9 ClearSpectators()

```
void ClearSpectators (
    WORD par )
```

Definition at line 675 of file [spectator.c](#).

4.134 spectator.c

[Go to the documentation of this file.](#)

```
00001
00006 /* #[ License : */
00007 /*
00008 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #] License : */
00032 /*
00033 *   #[ includes :
00034 */
00035
00036 #include "form3.h"
00037
00038 /*
00039 *   #] includes :
00040 *   #[ Commentary :
00041
00042   We use an array of SPECTATOR structs in AM.SpectatorFiles.
00043   When a spectator is removed this leaves a hole. This means that
00044   we cannot use AM.NumSpectatorFiles but always have to scan up to
00045   AM.SizeForSpectatorFiles which is the size of the array.
00046   An element is in use when it has a name. This is the name of the
00047   expression that is associated with it. There is also the number of
00048   the expression, but because the expressions are frequently renumbered
00049   at the end of a module, we always search for the spectators by name.
00050   The expression number is only valid in the current module.
00051   During execution we use the number of the spectator.
00052
00053   The FILEHANDLE struct is borrowed from the structs for the scratch
00054   files, but we do not keep copies for all workers as with the scratch
00055   files. This brings some limitations (but saves much space). Basically
00056   the reading can only be done by one master or worker. And because
00057   we use the buffer both for writing and for reading we cannot read and
00058   write in the same module.
00059
00060   Processor can see that an expression is to be filled with a spectator
00061   because we replace the compiler buffer number in the prototype by
00062   -specnum-1. Of course, after this filling has taken place we should
00063   make sure that in the next module there is a nonnegative number there.
00064   The input is then obtained from GetFromSpectator instead from GetTerm.
00065   This needed an extra argument in ThreadsProcessor. InParallelProcessor
00066   can figure it out by itself. ParFORM still needs to be treated for this.
00067
00068   The writing is to a single buffer. Hence it needs a lock. It is possible
00069   to give all workers their own buffers (at great memory cost) and merge
00070   the results when needed. That would be friendlier on ParFORM. We ALWAYS
00071   assume that the order of the terms in the spectator file is random.
00072
```

```

00073     In the first version there is no compression in the file. This could
00074     change in later versions because both the writing and the reading are
00075     purely sequential. Brackets are not possible.
00076
00077     Currently, ParFORM allows use of spectators only in the sequential
00078     mode. The parallelization is switched off in modules containing
00079     ToSpectator or CopySpectator. Workers never create or access to
00080     spectator files. Their file handles are always -1. We leave the
00081     parallelization of modules with spectators for future work.
00082
00083     #] Commentary :
00084     #[ CoCreateSpectator :
00085
00086     Syntax: CreateSpectator name_of_expr "filename";
00087  */
00088
00089 int CoCreateSpectator(UBYTE *inp)
00090 {
00091     UBYTE *p, *q, *filename, c, cc;
00092     WORD c1, c2, numexpr = 0, specnum, HadOne = 0;
00093     FILEHANDLE *fh;
00094     while ( *inp == ',' ) inp++;
00095     if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00096         MesPrint("&Illegal name for expression");
00097         return(1);
00098     }
00099     c = *q; *q = 0;
00100     if ( GetVar(inp,&c1,&c2,ALLVARIABLES,NOAUTO) != NAMENOTFOUND ) {
00101         if ( c2 == CEXPRESSION &&
00102             Expressions[c1].status == DROPSPECTATOREXPRESSION ) {
00103             numexpr = c1;
00104             Expressions[numexpr].status = SPECTATOREXPRESSION;
00105             HadOne = 1;
00106         }
00107         else {
00108             MesPrint("&The name %s has been used already.",inp);
00109             *q = c;
00110             return(1);
00111         }
00112     }
00113     p = q+1;
00114     while ( *p == ',' ) p++;
00115     if ( *p != '"' ) goto Syntax;
00116     p++; filename = p;
00117     while ( *p && *p != '"' ) {
00118         if ( *p == '\\\\' ) p++;
00119         p++;
00120     }
00121     if ( *p != '"' ) goto Syntax;
00122     q = p+1;
00123     while ( *q && ( *q == ',' || *q == ' ' || *q == '\\t' ) ) q++;
00124     if ( *q ) goto Syntax;
00125     cc = *p; *p = 0;
00126  /*
00127     Now we need to: create a struct for the spectator file.
00128  */
00129     if ( HadOne == 0 )
00130         numexpr = EntVar(CEXPRESSION,inp,SPECTATOREXPRESSION,0,0,0);
00131     fh = AllocFileHandle(1,(char *)filename);
00132  /*
00133     Make sure there is space in the AM.spectatorfiles array
00134  */
00135     if ( AM.NumSpectatorFiles >= AM.SizeForSpectatorFiles || AM.SpectatorFiles == 0 ) {
00136         int newsize, i;
00137         SPECTATOR *newspectators;
00138         if ( AM.SizeForSpectatorFiles == 0 ) {
00139             newsize = 10;
00140             AM.NumSpectatorFiles = AM.SizeForSpectatorFiles = 0;
00141         }
00142         else newsize = AM.SizeForSpectatorFiles*2;
00143         newspectators = (SPECTATOR *)Malloc1(newsize*sizeof(SPECTATOR),"Spectators");
00144         for ( i = 0; i < AM.NumSpectatorFiles; i++ )
00145             newspectators[i] = AM.SpectatorFiles[i];
00146         for ( ; i < newsize; i++ ) {
00147             newspectators[i].fh = 0;
00148             newspectators[i].name = 0;
00149             newspectators[i].exprnumber = -1;
00150             newspectators[i].flags = 0;
00151             PUTZERO(newspectators[i].position);
00152             PUTZERO(newspectators[i].readpos);
00153         }
00154         AM.SizeForSpectatorFiles = newsize;
00155         if ( AM.SpectatorFiles != 0 ) M_free(AM.SpectatorFiles,"Spectators");
00156         AM.SpectatorFiles = newspectators;
00157         specnum = AM.NumSpectatorFiles++;
00158     }
00159     else {

```

```

00160         for ( specnum = 0; specnum < AM.SizeForSpectatorFiles; specnum++ ) {
00161             if ( AM.SpectatorFiles[specnum].name == 0 ) break;
00162         }
00163         AM.NumSpectatorFiles++;
00164     }
00165     PUTZERO(AM.SpectatorFiles[specnum].position);
00166     AM.SpectatorFiles[specnum].name = (char *) (strDup1(inp, "Spectator expression name"));
00167     AM.SpectatorFiles[specnum].fh = fh;
00168     AM.SpectatorFiles[specnum].exprnumber = numexpr;
00169     *p = cc;
00170     return(0);
00171 Syntax:
00172     MesPrint("&Proper syntax is: CreateSpectator,exprname,\"filename\";");
00173     return(-1);
00174 }
00175
00176 /*
00177  #] CoCreateSpectator :
00178  #[ CoToSpectator :
00179  */
00180
00181 int CoToSpectator(UBYTE *inp)
00182 {
00183     UBYTE *q;
00184     WORD c1, numexpr;
00185     int i;
00186     while ( *inp == ',' ) inp++;
00187     if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00188         MesPrint("&Illegal name for expression");
00189         return(1);
00190     }
00191     if ( *q != 0 ) goto Syntax;
00192     if ( GetVar(inp, &c1, &numexpr, ALLVARIABLES, NOAUTO) == NAMENOTFOUND ||
00193         c1 != CEXPRESSION ) {
00194         MesPrint("&%s is not a valid expression.", inp);
00195         return(1);
00196     }
00197     if ( Expressions[numexpr].status != SPECTATOREXPRESSION ) {
00198         MesPrint("&%s is not an active spectator.", inp);
00199         return(1);
00200     }
00201     for ( i = 0; i < AM.SizeForSpectatorFiles; i++ ) {
00202         if ( AM.SpectatorFiles[i].name != 0 ) {
00203             if ( StrCmp((UBYTE *) (AM.SpectatorFiles[i].name), (UBYTE *) (inp)) == 0 ) break;
00204         }
00205     }
00206     if ( i >= AM.SizeForSpectatorFiles ) {
00207         MesPrint("&Spectator %s not found.", inp);
00208         return(1);
00209     }
00210     if ( ( AM.SpectatorFiles[i].flags & READSPECTATORFLAG ) != 0 ) {
00211         MesPrint("&Spectator %s: It is not permitted to read from and write to the same spectator in
one module.", inp);
00212         return(1);
00213     }
00214     AM.SpectatorFiles[i].exprnumber = numexpr;
00215     Add3Com(TYPETOSPECTATOR, i);
00216 #ifdef WITHMPI
00217     /*
00218      * In ParFORM, ToSpectator has to be executed on the master.
00219      */
00220     AC.mparallelflag |= NOPARALLEL_SPECTATOR;
00221 #endif
00222     return(0);
00223 Syntax:
00224     MesPrint("&Proper syntax is: ToSpectator,exprname;");
00225     return(-1);
00226 }
00227
00228 /*
00229  #] CoToSpectator :
00230  #[ CoRemoveSpectator :
00231  */
00232
00233 int CoRemoveSpectator(UBYTE *inp)
00234 {
00235     UBYTE *q;
00236     WORD c1, numexpr;
00237     int i;
00238     SPECTATOR *sp;
00239     while ( *inp == ',' ) inp++;
00240     if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00241         MesPrint("&Illegal name for expression");
00242         return(1);
00243     }
00244     if ( *q != 0 ) goto Syntax;
00245     if ( GetVar(inp, &c1, &numexpr, ALLVARIABLES, NOAUTO) == NAMENOTFOUND ||

```

```

00246         c1 != CEXPRESSION ) {
00247             MesPrint("&%s is not a valid expression.",inp);
00248             return(1);
00249         }
00250         if ( Expressions[numexpr].status != SPECTATOREXPRESSION ) {
00251             MesPrint("&%s is not a spectator.",inp);
00252             return(1);
00253         }
00254         for ( i = 0; i < AM.SizeForSpectatorFiles; i++ ) {
00255             if ( AM.SpectatorFiles[i].name != 0 ) {
00256                 if ( StrCmp((UBYTE *) (AM.SpectatorFiles[i].name), (UBYTE *) (inp)) == 0 ) {
00257                     break;
00258                 }
00259             }
00260         }
00261         if ( i >= AM.SizeForSpectatorFiles ) {
00262             MesPrint("&Spectator %s not found.",inp);
00263             return(1);
00264         }
00265         sp = AM.SpectatorFiles+i;
00266         Expressions[numexpr].status = DROPSPECTATOREXPRESSION;
00267         if ( sp->fh->handle != -1 ) {
00268             CloseFile(sp->fh->handle);
00269             sp->fh->handle = -1;
00270             remove(sp->fh->name);
00271         }
00272         M_free(sp->fh,"Temporary FileHandle");
00273         M_free(sp->name,"Spectator expression name");
00274
00275         PUTZERO(sp->position);
00276         PUTZERO(sp->readpos);
00277         sp->fh = 0;
00278         sp->name = 0;
00279         sp->exprnumber = -1;
00280         sp->flags = 0;
00281         AM.NumSpectatorFiles--;
00282         return(0);
00283 Syntax:
00284         MesPrint("&Proper syntax is: RemoveSpectator,exprname;");
00285         return(-1);
00286     }
00287
00288     /*
00289     #] CoRemoveSpectator :
00290     #[ CoEmptySpectator :
00291     */
00292
00293     int CoEmptySpectator(UBYTE *inp)
00294     {
00295         UBYTE *q;
00296         WORD c1, numexpr;
00297         int i;
00298         SPECTATOR *sp;
00299         while ( *inp == ',' ) inp++;
00300         if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00301             MesPrint("&Illegal name for expression");
00302             return(1);
00303         }
00304         if ( *q != 0 ) goto Syntax;
00305         if ( GetVar(inp,&c1,&numexpr,ALLVARIABLES,NOAUTO) == NAMENOTFOUND ||
00306             c1 != CEXPRESSION ) {
00307             MesPrint("&%s is not a valid expression.",inp);
00308             return(1);
00309         }
00310         if ( Expressions[numexpr].status != SPECTATOREXPRESSION ) {
00311             MesPrint("&%s is not a spectator.",inp);
00312             return(1);
00313         }
00314         for ( i = 0; i < AM.SizeForSpectatorFiles; i++ ) {
00315             if ( StrCmp((UBYTE *) (AM.SpectatorFiles[i].name), (UBYTE *) (inp)) == 0 ) break;
00316         }
00317         if ( i >= AM.SizeForSpectatorFiles ) {
00318             MesPrint("&Spectator %s not found.",inp);
00319             return(1);
00320         }
00321         sp = AM.SpectatorFiles+i;
00322         if ( sp->fh->handle != -1 ) {
00323             CloseFile(sp->fh->handle);
00324             sp->fh->handle = -1;
00325             remove(sp->fh->name);
00326         }
00327         sp->fh->POfill = sp->fh->POfull = sp->fh->PObuffer;
00328         PUTZERO(sp->position);
00329         PUTZERO(sp->readpos);
00330         return(0);
00331 Syntax:
00332         MesPrint("&Proper syntax is: EmptySpectator,exprname;");

```

```

00333     return(-1);
00334 }
00335
00336 /*
00337  #] CoEmptySpectator :
00338  #[ PutInSpectator :
00339
00340  We need to use locks! There is only one file.
00341  The code was copied (and modified) from PutOut.
00342  Here we use no compression.
00343 */
00344
00345 int PutInSpectator(WORD *term,WORD specnum)
00346 {
00347     GETBIDENTITY
00348     WORD i, *p, ret;
00349     LONG RetCode;
00350     SPECTATOR *sp = &(AM.SpectatorFiles[specnum]);
00351     FILEHANDLE *fi = sp->fh;
00352
00353     if ( ( i = *term ) <= 0 ) return(0);
00354     LOCK(fi->pthreadslck);
00355     ret = i;
00356     p = fi->POfill;
00357     do {
00358         if ( p >= fi->POstop ) {
00359             if ( fi->handle < 0 ) {
00360                 if ( ( RetCode = CreateFile(fi->name) ) >= 0 ) {
00361                     fi->handle = (WORD)RetCode;
00362                     PUTZERO(fi->filesize);
00363                     PUTZERO(fi->POposition);
00364                 }
00365                 else {
00366                     MLOCK(ErrorMessageLock);
00367                     MesPrint("Cannot create spectator file %s",fi->name);
00368                     MUNLOCK(ErrorMessageLock);
00369                     UNLOCK(fi->pthreadslck);
00370                     return(-1);
00371                 }
00372             }
00373             SeekFile(fi->handle,&(sp->position),SEEK_SET);
00374             if ( ( RetCode = WriteFile(fi->handle,(UBYTE *) (fi->PObuffer),fi->POsize) ) != fi->POsize
00375         ) {
00376             MLOCK(ErrorMessageLock);
00377             MesPrint("Error during spectator write. Disk full?");
00378             MesPrint("Attempt to write %l bytes on file %d at position %l5p",
00379                 fi->POsize,fi->handle,&(fi->POposition));
00380             MesPrint("RetCode = %l, Buffer address = %l",RetCode,(LONG) (fi->PObuffer));
00381             MUNLOCK(ErrorMessageLock);
00382             UNLOCK(fi->pthreadslck);
00383             return(-1);
00384         }
00385         ADDPOS(fi->filesize,fi->POsize);
00386         p = fi->PObuffer;
00387         ADDPOS(sp->position,fi->POsize);
00388         fi->POposition = sp->position;
00389     }
00390     *p++ = *term++;
00391     while ( --i > 0 );
00392     fi->POfull = fi->POfill = p;
00393     Expressions[AM.SpectatorFiles[specnum].exprnumber].counter++;
00394     UNLOCK(fi->pthreadslck);
00395     return(ret);
00396 }
00397
00398 /*
00399  #] PutInSpectator :
00400  #[ FlushSpectators :
00401 */
00402 void FlushSpectators(void)
00403 {
00404     SPECTATOR *sp = AM.SpectatorFiles;
00405     FILEHANDLE *fh;
00406     LONG RetCode;
00407     int i;
00408     LONG size;
00409     if ( AM.NumSpectatorFiles <= 0 ) return;
00410     for ( i = 0; i < AM.SizeForSpectatorFiles; i++, sp++ ) {
00411         if ( sp->name == 0 ) continue;
00412         fh = sp->fh;
00413         if ( ( sp->flags & READSPECTATORFLAG ) != 0 ) { /* reset for writing */
00414             sp->flags &= ~READSPECTATORFLAG;
00415             fh->POfill = fh->PObuffer;
00416             if ( fh->handle >= 0 ) {
00417                 SeekFile(fh->handle,&(sp->position),SEEK_SET);
00418                 fh->POposition = sp->position;

```

```

00419         }
00420         continue;
00421     }
00422     if ( fh->POfill <= fh->PObuffer ) continue; /* is clean */
00423     if ( fh->handle < 0 ) { /* File needs to be created */
00424         if ( ( RetCode = CreateFile(fh->name) ) >= 0 ) {
00425             PUTZERO(fh->filesize);
00426             PUTZERO(fh->POposition);
00427             fh->handle = (WORD)RetCode;
00428         }
00429         else {
00430             MLOCK(ErrorMessageLock);
00431             MesPrint("Cannot create spectator file %s",fh->name);
00432             MUNLOCK(ErrorMessageLock);
00433             Terminate(-1);
00434         }
00435         PUTZERO(sp->position);
00436     }
00437     SeekFile(fh->handle,&(sp->position),SEEK_SET);
00438     size = (fh->POfill - fh->PObuffer)*sizeof(WORD);
00439     if ( ( RetCode = WriteFile(fh->handle,(UBYTE *) (fh->PObuffer),size) ) != size ) {
00440         MLOCK(ErrorMessageLock);
00441         MesPrint("Write error synching spectator file. Disk full?");
00442         MesPrint("Attempt to write %l bytes on file %s at position %l5p",
00443             size,fh->name,&(sp->position));
00444         MUNLOCK(ErrorMessageLock);
00445         Terminate(-1);
00446     }
00447     fh->POfill = fh->PObuffer;
00448     SeekFile(fh->handle,&(sp->position),SEEK_END);
00449     fh->POposition = sp->position;
00450 }
00451 return;
00452 }
00453
00454 /*
00455 #] FlushSpectators :
00456 #[ CoCopySpectator :
00457 */
00458
00459 int CoCopySpectator(UBYTE *inp)
00460 {
00461     GETIDENTITY
00462     UBYTE *q, c, *exprname, *p;
00463     WORD c1, c2, numexpr;
00464     int specnum, error = 0;
00465     SPECTATOR *sp;
00466     while ( *inp == ',' ) inp++;
00467     if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00468         MesPrint("%Illegal name for expression");
00469         return(1);
00470     }
00471     if ( *q == 0 ) goto Syntax;
00472     c = *q; *q = 0;
00473     if ( GetVar(inp,&c1,&c2,ALLVARIABLES,NOAUTO) != NAMENOTFOUND ) {
00474         MesPrint("%s is the name of an existing variable.",inp);
00475         return(1);
00476     }
00477     numexpr = EntVar(CEXPRESSION,inp,LOCALEXPRESSION,0,0,0);
00478     p = q;
00479     exprname = inp;
00480     *q = c;
00481     while ( *q == ' ' || *q == ',' || *q == '\t' ) q++;
00482     if ( *q != '=' ) goto Syntax;
00483     q++;
00484     while ( *q == ' ' || *q == ',' || *q == '\t' ) q++;
00485     inp = q;
00486     if ( ( q = SkipAName(inp) ) == 0 || q[-1] == '_' ) {
00487         MesPrint("%Illegal name for spectator expression");
00488         return(1);
00489     }
00490     if ( *q != 0 ) goto Syntax;
00491     if ( AM.NumSpectatorFiles <= 0 ) {
00492         MesPrint("%CopySpectator: There are no spectator expressions!");
00493         return(1);
00494     }
00495     sp = AM.SpectatorFiles;
00496     for ( specnum = 0; specnum < AM.SizeForSpectatorFiles; specnum++, sp++ ) {
00497         if ( sp->name != 0 ) {
00498             if ( StrCmp((UBYTE *) (sp->name),(UBYTE *) (inp)) == 0 ) break;
00499         }
00500     }
00501     if ( specnum >= AM.SizeForSpectatorFiles ) {
00502         MesPrint("%Spectator %s not found.",inp);
00503         return(1);
00504     }
00505     sp->flags |= READSPECTATORFLAG;

```

```

00506     PUTZERO(sp->fh->POposition);
00507     PUTZERO(sp->readpos);
00508     sp->fh->POfill = sp->fh->PObuffer;
00509     if ( sp->fh->handle >= 0 ) {
00510         SeekFile(sp->fh->handle, &(sp->fh->POposition), SEEK_SET);
00511     }
00512     /*
00513     Now we have:
00514     1: The name of the target expression: numexpr
00515     2: The spectator: sp (or specnum).
00516     Time for some action. We need:
00517     a: Write a prototype to create the expression
00518     b: Signal to Processor that this is a spectator.
00519     We do this by giving a negative compiler buffer number.
00520     */
00521     {
00522         WORD *OldWork, *w;
00523         POSITION pos;
00524         OldWork = w = AT.WorkPointer;
00525         *w++ = TYPEEXPRESSION;
00526         *w++ = 3+SUBEXPSIZE;
00527         *w++ = numexpr;
00528         AC.ProtoType = w;
00529         AR.CurExpr = numexpr;          /* Block expression numexpr */
00530         *w++ = SUBEXPRESSION;
00531         *w++ = SUBEXPSIZE;
00532         *w++ = numexpr;
00533         *w++ = 1;
00534         *w++ = -specnum-1;          /* Indicates "spectator" to Processor */
00535         FILLSUB(w)
00536         *w++ = 1;
00537         *w++ = 1;
00538         *w++ = 3;
00539         *w++ = 0;
00540         SeekScratch(AR.outfile, &pos);
00541         Expressions[numexpr].counter = 1;
00542         Expressions[numexpr].onfile = pos;
00543         Expressions[numexpr].whichbuffer = 0;
00544         #ifdef PARALLELCODE
00545         Expressions[numexpr].partodo = AC.inparallelflag;
00546         #endif
00547         OldWork[2] = w - OldWork - 3;
00548         AT.WorkPointer = w;
00549
00550         if ( PutOut(BHEAD OldWork+2, &pos, AR.outfile, 0) < 0 ) {
00551             c = *p; *p = 0;
00552             MesPrint("&Cannot create expression %s", exprname);
00553             *p = c;
00554             error = -1;
00555         }
00556         else {
00557             OldWork[2] = 4+SUBEXPSIZE;
00558             OldWork[4] = SUBEXPSIZE;
00559             OldWork[5] = numexpr;
00560             OldWork[SUBEXPSIZE+3] = 1;
00561             OldWork[SUBEXPSIZE+4] = 1;
00562             OldWork[SUBEXPSIZE+5] = 3;
00563             OldWork[SUBEXPSIZE+6] = 0;
00564             if ( PutOut(BHEAD OldWork+2, &pos, AR.outfile, 0) < 0
00565                 || FlushOut(&pos, AR.outfile, 0) ) {
00566                 c = *p; *p = 0;
00567                 MesPrint("&Cannot create expression %s", exprname);
00568                 *p = c;
00569                 error = -1;
00570             }
00571             AR.outfile->POfull = AR.outfile->POfill;
00572         }
00573         OldWork[2] = numexpr;
00574     /*
00575     Seems unnecessary (13-feb-2018)
00576
00577     AddNtoL(OldWork[1], OldWork);
00578     */
00579     AT.WorkPointer = OldWork;
00580     if ( AC.dumnumflag ) Add2Com(TYPEDETCURDUM)
00581     }
00582     #ifdef WITHMPI
00583     /*
00584     * In ParFORM, substitutions of spectators has to be done on the master.
00585     */
00586     AC.mparallelflag |= NOPARALLEL_SPECTATOR;
00587     #endif
00588     return(error);
00589 Syntax:
00590     MesPrint("&Proper syntax is: CopySpectator, exprname=spectatorname;");
00591     return(-1);
00592 }

```



```

00593
00594 /*
00595 #] CoCopySpectator :
00596 #[ GetFromSpectator :
00597
00598     Note that if we did things right, we do not need a lock for the reading.
00599 */
00600
00601 WORD GetFromSpectator(WORD *term,WORD specnum)
00602 {
00603     SPECTATOR *sp = &(AM.SpectatorFiles[specnum]);
00604     FILEHANDLE *fh = sp->fh;
00605     WORD i, size, *t = term;
00606     LONG InIn;
00607     if ( fh->handle < 0 ) {
00608         *term = 0;
00609         return(0);
00610     }
00611 /*
00612     sp->position marks the 'end' of the file: the point where writing should
00613     take place. sp->readpos marks from where to read.
00614     fh->PPosition marks where the file is currently positioned.
00615     Note that when we read, we need to
00616 */
00617     if ( ISZEROPos(sp->readpos) ) { /* we start reading. Fill buffer. */
00618         FillBuffer:
00619         SeekFile(fh->handle,&(sp->readpos),SEEK_SET);
00620         InIn = ReadFile(fh->handle,(UBYTE *) (fh->PObuffer),fh->POsize);
00621         if ( InIn < 0 || ( InIn & 1 ) ) {
00622             MLOCK(ErrorMessageLock);
00623             MesPrint("Error reading information for %s spectator",sp->name);
00624             MUNLOCK(ErrorMessageLock);
00625             Terminate(-1);
00626         }
00627         InIn /= sizeof(WORD);
00628         if ( InIn == 0 ) { *term = 0; return(0); }
00629         SeekFile(fh->handle,&(sp->readpos),SEEK_CUR);
00630         fh->PPosition = sp->readpos;
00631         fh->POfull = fh->PObuffer+InIn;
00632         fh->POfill = fh->PObuffer;
00633     }
00634     if ( fh->POfill == fh->POfull ) { /* not even the size of the term! */
00635         if ( ISLESSPos(sp->readpos,sp->position) ) goto FillBuffer;
00636         *term = 0;
00637         return(0);
00638     }
00639     size = *fh->POfill++; *t++ = size;
00640     for ( i = 1; i < size; i++ ) {
00641         if ( fh->POfill >= fh->POfull ) {
00642             SeekFile(fh->handle,&(sp->readpos),SEEK_SET);
00643             InIn = ReadFile(fh->handle,(UBYTE *) (fh->PObuffer),fh->POsize);
00644             if ( InIn < 0 || ( InIn & 1 ) ) {
00645                 MLOCK(ErrorMessageLock);
00646                 MesPrint("Error reading information for %s spectator",sp->name);
00647                 MUNLOCK(ErrorMessageLock);
00648                 Terminate(-1);
00649             }
00650             InIn /= sizeof(WORD);
00651             if ( InIn == 0 ) {
00652                 MLOCK(ErrorMessageLock);
00653                 MesPrint("Reading incomplete information for %s spectator",sp->name);
00654                 MUNLOCK(ErrorMessageLock);
00655                 Terminate(-1);
00656             }
00657             SeekFile(fh->handle,&(sp->readpos),SEEK_CUR);
00658             fh->PPosition = sp->readpos;
00659             fh->POfull = fh->PObuffer+InIn;
00660             fh->POfill = fh->PObuffer;
00661         }
00662         *t++ = *fh->POfill++;
00663     }
00664     return(size);
00665 }
00666
00667 /*
00668 #] GetFromSpectator :
00669 #[ ClearSpectators :
00670
00671     Removes all spectators.
00672     In case of .store, the ones that are protected by .global stay.
00673 */
00674
00675 void ClearSpectators(WORD par)
00676 {
00677     SPECTATOR *sp = AM.SpectatorFiles;
00678     WORD numexpr, c1;
00679     int i;

```

```

00680     if ( AM.NumSpectatorFiles > 0 ) {
00681         for ( i = 0; i < AM.SizeForSpectatorFiles; i++, sp++ ) {
00682             if ( sp->name == 0 ) continue;
00683             if ( ( sp->flags & GLOBALSPECTATORFLAG ) == 1 && par == STOREMODULE ) continue;
00684
00685             if ( GetVar((UBYTE *) (sp->name), &c1, &numexpr, ALLVARIABLES, NOAUTO) == NAMENOTFOUND ||
00686                 c1 != CEXPRESSION ) {
00687                 MesPrint("%s is not a valid expression.", sp->name);
00688                 continue;
00689             }
00690             Expressions[numexpr].status = DROPPEDEXPRESSION;
00691             if ( sp->fh->handle != -1 ) {
00692                 CloseFile(sp->fh->handle);
00693                 sp->fh->handle = -1;
00694                 remove(sp->fh->name);
00695             }
00696             M_free(sp->fh, "Temporary FileHandle");
00697             M_free(sp->name, "Spectator expression name");
00698             PUTZERO(sp->position);
00699             sp->fh = 0;
00700             sp->name = 0;
00701             sp->exprnumber = -1;
00702             sp->flags = 0;
00703             AM.NumSpectatorFiles--;
00704         }
00705     }
00706 }
00707
00708 /*
00709 #] ClearSpectators :
00710 */

```


4.135 startup.c File Reference

```

#include "form3.h"
#include "inivar.h"
#include <signal.h>

```

Include dependency graph for startup.c:

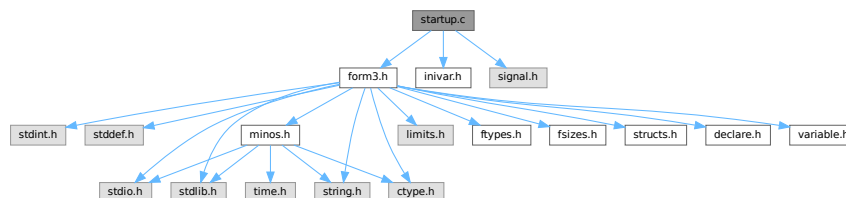

Macros

- #define **STRINGIFY**(x) STRINGIFY__(x)
- #define **STRINGIFY__**(x) #x
- #define **FORMNAME** "FORM"
- #define **VERSIONSTR__** STRINGIFY(MAJORVERSION) "." STRINGIFY(MINORVERSION) "Beta"
- #define **VERSIONSTR** FORMNAME " " VERSIONSTR__ " (" PRODUCTIONDATE ")"
- #define **TAKEPATH**(x) if(s[1]==' '){x=s+2;} else{x=*argv++;argc--;}
- #define **DEFAULTFNAMELENGTH** 16
- #define **STR2**(x) #x
- #define **STR**(x) STR2(x)

Functions

- int [DoTail](#) (int argc, UBYTE **argv)
- int [OpenInput](#) (void)
- void [ReserveTempFiles](#) (int par)
- void [StartVariables](#) (void)
- void [StartMore](#) (void)
- void [IniVars](#) (void)
- int [main](#) (int argc, char **argv)
- void [CleanUp](#) (WORD par)
- void [TerminateImpl](#) (int errorcode, const char *file, int line, const char *function)
- void [PrintDeprecation](#) (const char *feature, const char *issue)
- void [PrintRunningTime](#) (void)
- LONG [GetRunningTime](#) (void)

Variables

- UBYTE * [emptystring](#) = (UBYTE *)"."
- UBYTE * [defaulttempfilename](#) = (UBYTE *)"xformxxx.str"

4.135.1 Detailed Description

This file contains the main program. It also deals with the very early stages of the startup of FORM and the final stages when the program attempts some cleanup. Here is the routine that analyses the command tail.

Definition in file [startup.c](#).

4.135.2 Macro Definition Documentation

4.135.2.1 STRINGIFY

```
#define STRINGIFY(  
    x ) STRINGIFY__(x)
```

Definition at line 57 of file [startup.c](#).

4.135.2.2 STRINGIFY__

```
#define STRINGIFY__(  
    x ) #x
```

Definition at line 58 of file [startup.c](#).

4.135.2.3 FORMNAME

```
#define FORMNAME "FORM"
```

Definition at line 68 of file [startup.c](#).

4.135.2.4 VERSIONSTR__

```
#define VERSIONSTR__ STRINGIFY(MAJORVERSION) "." STRINGIFY(MINORVERSION) "Beta"
```

Definition at line 97 of file [startup.c](#).

4.135.2.5 VERSIONSTR

```
#define VERSIONSTR FORMNAME " " VERSIONSTR__ " (" PRODUCTIONDATE ")"
```

Definition at line 101 of file [startup.c](#).

4.135.2.6 TAKEPATH

```
#define TAKEPATH(  
    x ) if(s[1]== '=' ) {x=s+2;} else {x=*argv++;argc--;}  
    x )
```

Definition at line 235 of file [startup.c](#).

4.135.2.7 DEFAULTFNAMELENGTH

```
#define DEFAULTFNAMELENGTH 16
```

Definition at line 664 of file [startup.c](#).

4.135.3 Function Documentation

4.135.3.1 DoTail()

```
int DoTail (  
    int argc,  
    UBYTE ** argv )
```

Definition at line 237 of file [startup.c](#).

4.135.3.2 OpenInput()

```
int OpenInput (  
    void )
```

Definition at line 542 of file [startup.c](#).

4.135.3.3 ReserveTempFiles()

```
void ReserveTempFiles (  
    int par )
```

Definition at line 666 of file [startup.c](#).

4.135.3.4 StartVariables()


```
void StartVariables (
    void )
```

All functions (well, nearly all) are declared here.

Definition at line 905 of file [startup.c](#).

References [AddNtoC\(\)](#), [AddRHS\(\)](#), [Compare1\(\)](#), [inicbufs\(\)](#), [FuNcTiOn::name](#), [PF_BroadcastNumber\(\)](#), [PutPreVar\(\)](#), and [FuNcTiOn::symmetric](#).

Here is the call graph for this function:

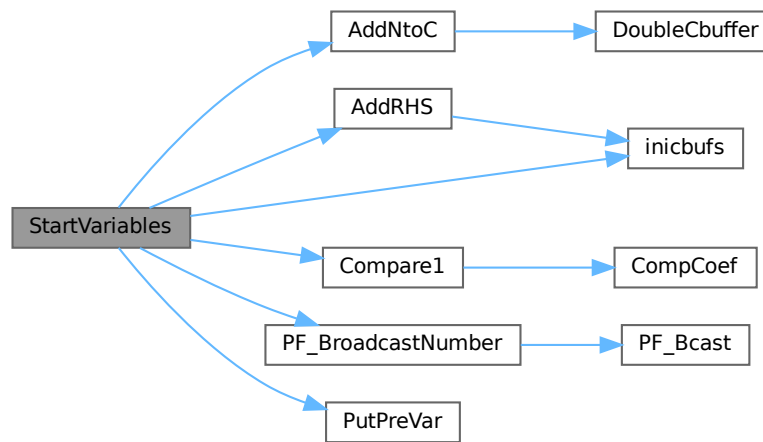

4.135.3.5 StartMore()

```
void StartMore (
    void )
```

Definition at line 1333 of file [startup.c](#).

4.135.3.6 IniVars()

```
void IniVars (
    void )
```

Definition at line 1371 of file [startup.c](#).

4.135.3.7 main()

```
int main (
    int argc,
    char ** argv )
```

Definition at line 1678 of file [startup.c](#).

4.135.3.8 Cleanup()

```
void Cleanup (
    WORD par )
```

Definition at line 1780 of file [startup.c](#).

4.135.3.9 TerminateImpl()

```
void TerminateImpl (
    int errorcode,
    const char * file,
    int line,
    const char * function )
```

Definition at line 1869 of file [startup.c](#).

4.135.3.10 PrintDeprecation()

```
void PrintDeprecation (
    const char * feature,
    const char * issue )
```

Prints a deprecation warning for a given feature.

Parameters

<i>feature</i>	The name of the deprecated feature.
<i>issue</i>	The associated issue, e.g., "issues/700".

Definition at line 2082 of file [startup.c](#).

4.135.3.11 PrintRunningTime()

```
void PrintRunningTime (
    void )
```

Definition at line 2106 of file [startup.c](#).

4.135.3.12 GetRunningTime()

```
LONG GetRunningTime (
    void )
```

Definition at line 2147 of file [startup.c](#).

4.135.4 Variable Documentation

4.135.4.1 emptystring

```
UBYTE* emptystring = (UBYTE *)"."
```

Definition at line 660 of file [startup.c](#).

4.135.4.2 defaulttempfilename

```
UBYTE* defaulttempfilename = (UBYTE *)"xformxxx.str"
```

Definition at line 661 of file [startup.c](#).

4.136 startup.c

[Go to the documentation of this file.](#)

```
00001
00008 /* #[ License : */
00009 /*
00010 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 *   When using this file you are requested to refer to the publication
00012 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 *   This is considered a matter of courtesy as the development was paid
00014 *   for by FOM the Dutch physics granting agency and we would like to
00015 *   be able to track its scientific use to convince FOM of its value
00016 *   for the community.
00017 *
00018 *   This file is part of FORM.
00019 *
00020 *   FORM is free software: you can redistribute it and/or modify it under the
00021 *   terms of the GNU General Public License as published by the Free Software
00022 *   Foundation, either version 3 of the License, or (at your option) any later
00023 *   version.
00024 *
00025 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 *   details.
00029 *
00030 *   You should have received a copy of the GNU General Public License along
00031 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* #] License : */
00034 /*
00035     #[ includes :
00036 */
00037
00038 #include "form3.h"
00039 #include "inivar.h"
00040
00041 #ifdef TRAP_SIGNALS
00042 #include "portsignals.h"
00043 #else
00044 #include <signal.h>
00045 #endif
00046 #ifdef ENABLE_BACKTRACE
00047     #include <execinfo.h>
00048 #endif
00049 #ifdef LINUX
00049     #include <stdint.h>
00050     #include <inttypes.h>
00051 #endif
00052 #endif
00053
00054 /*
00055 * A macro for translating the contents of `x' into a string after expanding.
00056 */
00057 #define STRINGIFY(x) STRINGIFY__(x)
00058 #define STRINGIFY__(x) #x
00059
00060 /*
```

```

00061  * FORMNAME = "FORM" or "TFORM" or "ParFORM".
00062  */
00063  #if defined(WITHPTHREADS)
00064      #define FORMNAME "TFORM"
00065  #elif defined(WITHMPI)
00066      #define FORMNAME "ParFORM"
00067  #else
00068      #define FORMNAME "FORM"
00069  #endif
00070
00071  /*
00072  * VERSIONSTR is the version information printed in the header line.
00073  */
00074  #ifdef HAVE_CONFIG_H
00075      /* We have also version.h. */
00076      #include "version.h"
00077      #ifndef REPO_VERSION
00078          #define REPO_VERSION STRINGIFY(REPO_MAJOR_VERSION) "." STRINGIFY(REPO_MINOR_VERSION)
00079      #endif
00080      #ifndef REPO_DATE
00081          /* The build date, instead of the repo date. */
00082          #define REPO_DATE __DATE__
00083      #endif
00084      #ifndef REPO_REVISION
00085          #define VERSIONSTR FORMNAME " " REPO_VERSION " (" REPO_DATE ", " REPO_REVISION ")"
00086      #else
00087          #define VERSIONSTR FORMNAME " " REPO_VERSION " (" REPO_DATE ")"
00088      #endif
00089      #define MAJORVERSION REPO_MAJOR_VERSION
00090      #define MINORVERSION REPO_MINOR_VERSION
00091  #else
00092      /*
00093       * Otherwise, form3.h defines MAJORVERSION, MINORVERSION and PRODUCTIONDATE,
00094       * possibly BETAVERSION.
00095       */
00096      #ifdef BETAVERSION
00097          #define VERSIONSTR__ STRINGIFY(MAJORVERSION) "." STRINGIFY(MINORVERSION) "Beta"
00098      #else
00099          #define VERSIONSTR__ STRINGIFY(MAJORVERSION) "." STRINGIFY(MINORVERSION)
00100      #endif
00101      #define VERSIONSTR FORMNAME " " VERSIONSTR__ " (" PRODUCTIONDATE ")"
00102  #endif
00103
00104  /*
00105      #] includes :
00106      #[ PrintHeader :
00107  */
00108
00114  static void PrintHeader(int with_full_info)
00115  {
00116      #ifdef WITHMPI
00117          if ( PF.me == MASTER && !AM.silent ) {
00118      #else
00119          if ( !AM.silent ) {
00120      #endif
00121          char buffer1[250], buffer2[80], *s = buffer1, *t = buffer2;
00122          WORD length, n;
00123          for ( n = 0; n < 250; n++ ) buffer1[n] = ' ';
00124          /*
00125           * NOTE: we expect that the compiler optimizes strlen("string literal")
00126           * to just a number.
00127           */
00128          if ( strlen(VERSIONSTR) <= 100 ) {
00129              strcpy(s,VERSIONSTR);
00130              s += strlen(VERSIONSTR);
00131              *s = 0;
00132          }
00133          else {
00134              /*
00135               * Truncate when it is too long.
00136               */
00137              strncpy(s,VERSIONSTR,97);
00138              s[97] = '.';
00139              s[98] = '.';
00140              s[99] = ')';
00141              s[100] = '\0';
00142              s += 100;
00143          }
00144      /*
00145          By now we omit the message about 32/64 bits. It should all be 64.
00146
00147          s += sprintf(s,250-(s-buffer1), " %d-bits", (WORD) (sizeof(WORD)*16));
00148          *s = 0;
00149      */
00150          if ( with_full_info ) {
00151      #if defined(WITHPTHREADS) || defined(WITHMPI)
00152      #if defined(WITHPTHREADS)

```



```

00153         int nworkers = AM.totalnumberofthreads-1;
00154 #elif defined(WITHMPI)
00155         int nworkers = PF.numtasks-1;
00156 #endif
00157         s += snprintf(s,250-(s-buffer1)," %d worker",nworkers);
00158         *s = 0;
00159 /*         while ( *s ) s++; */
00160         if ( nworkers != 1 ) {
00161             *s++ = 's';
00162             *s = '\\0';
00163         }
00164 #endif
00165
00166         snprintf(t,80-(t-buffer2),"Run: %s",MakeDate());
00167         while ( *t ) t++;
00168
00169         /*
00170          * Align the date to the right, if it fits in a line.
00171          */
00172         length = (s-buffer1) + (t-buffer2);
00173         if ( length+2 <= AC.LineLength ) {
00174             for ( n = AC.LineLength-length; n > 0; n-- ) *s++ = ' ';
00175             *s = 0;
00176             strcat(s,buffer2);
00177             while ( *s ) s++;
00178         }
00179         else {
00180             *s = 0;
00181             strcat(s," ");
00182             while ( *s ) s++;
00183             *s = 0;
00184             strcat(s,buffer2);
00185             while ( *s ) s++;
00186         }
00187     }
00188
00189     /*
00190     * If the header information doesn't fit in a line, we need to extend
00191     * the line length temporarily.
00192     */
00193     length = s-buffer1;
00194     if ( length <= AC.LineLength ) {
00195         MesPrint("%s",buffer1);
00196     }
00197     else {
00198         WORD oldLineLength = AC.LineLength;
00199         AC.LineLength = length;
00200         MesPrint("%s",buffer1);
00201         AC.LineLength = oldLineLength;
00202     }
00203 }
00204 #ifdef WINDOWS
00205     PrintDeprecation("the native Windows version", "issues/623");
00206 #endif
00207 #if BITSINWORD == 16
00208     PrintDeprecation("the 32-bit version", "issues/624");
00209 #endif
00210 #ifdef WITHMPI
00211     PrintDeprecation("the MPI version (ParFORM)", "issues/625");
00212 #endif
00213     if ( AC.CheckpointFlag ) {
00214         PrintDeprecation("the checkpoint mechanism", "issues/626");
00215     }
00216 }
00217
00218 /*
00219     #] PrintHeader :
00220     #[ DoTail :
00221
00222     Routine reads the command tail and handles the commandline options.
00223     It sets the flags for later actions and stored pathnames for
00224     the setup file, include/prc/sub directories etc.
00225     Finally the name of the program is passed on.
00226     Note that we do not support interactive use yet. This will come
00227     to pass in the distant future when we can couple STedi to FORM.
00228     Routine made 23-feb-1993 by J.Vermaseren
00229 */
00230
00231 #ifdef WITHINTERACTION
00232 static UBYTE deflogname[] = "formsession.log";
00233 #endif
00234
00235 #define TAKEPATH(x) if(s[1]==' '){x=s+2;} else{x=*argv++;argc--;}
00236
00237 int DoTail(int argc, UBYTE **argv)
00238 {
00239     int errorflag = 0, onlyversion = 1;

```

```

00240     UBYTE *s, *t, *copy;
00241     int threadnum = 0;
00242     argc--; argv++;
00243     AM.ClearStore = 0;
00244     AM.TimeLimit = 0;
00245     AM.LogType = -1;
00246     AM.HoldFlag = AM.qError = AM.Interact = AM.FileOnlyFlag = 0;
00247     AM.InputFileName = AM.LogFileName = AM.IncDir = AM.TempDir = AM.TempSortDir =
00248     AM.SetupDir = AM.SetupFile = AM.Path = 0;
00249     AM.FromStdin = 0;
00250     /* Always use MultiRun, "-M" option is now ignored. */
00251     AM.MultiRun = 1;
00252     if ( argc < 1 ) {
00253         onlyversion = 0;
00254         goto printversion;
00255     }
00256     while ( argc >= 1 ) {
00257         s = *argv++; argc--;
00258         if ( *s == '-' || ( *s == '/' && ( argc > 0 || AM.Interact ) ) ) {
00259             s++;
00260             switch (*s) {
00261                 case 'c': /* Error checking only */
00262                     AM.qError = 1; break;
00263                 case 'C': /* Next arg is filename of log file */
00264                     TAKEPATH(AM.LogFileName) break;
00265                 case 'D':
00266                 case 'd': /* Next arg is define preprocessor var. */
00267                     t = copy = strDupl(*argv,"Dotail");
00268                     while ( *t && *t != '=' ) t++;
00269                     if ( *t == 0 ) {
00270                         if ( PutPreVar(copy, (UBYTE *) "1", 0, 0) < 0 ) return(-1);
00271                     }
00272                     else {
00273                         *t++ = 0;
00274                         if ( PutPreVar(copy, t, 0, 0) < 0 ) return(-1);
00275                         t[-1] = '=';
00276                     }
00277                     M_free(copy, "-d prevar");
00278                     argv++; argc--; break;
00279                 case 'f': /* Output only to regular log file */
00280                     AM.FileOnlyFlag = 1; AM.LogType = 0; break;
00281                 case 'F': /* Output only to log file. Further like L. */
00282                     AM.FileOnlyFlag = 1; AM.LogType = 1; break;
00283                 case 'h': /* For old systems: wait for key before exit */
00284                     AM.HoldFlag = 1; break;
00285                 case 'i':
00286                     if ( StrCmp(s, (UBYTE *) "ignore-deprecation") == 0 ) {
00287                         AM.IgnoreDeprecation = 1;
00288                         break;
00289                     }
00290 #ifndef WITHINTERACTION
00291                     /* Interactive session (not used yet) */
00292                     AM.Interact = 1;
00293                     break;
00294 #else
00295                     goto IllegalOption;
00296 #endif
00297                 case 'I': /* Next arg is dir for inc/prc/sub files */
00298                     TAKEPATH(AM.IncDir) break;
00299                 case 'l': /* Make regular log file */
00300                     if ( s[1] == 'l' ) AM.LogType = 1; /*compatibility! */
00301                     else AM.LogType = 0;
00302                     break;
00303                 case 'L': /* Make log file with only final statistics */
00304                     AM.LogType = 1; break;
00305                 case 'M': /* Multirun. Name of tempfiles will contain PID */
00306                     /* This option is now ignored. We always use MultiRun. */
00307                     /* AM.MultiRun = 1; */
00308                     break;
00309                 case 'm': /* Read number of threads */
00310                 case 'w': /* Read number of workers */
00311                     t = s++;
00312                     threadnum = 0;
00313                     while ( *s >= '0' && *s <= '9' )
00314                         threadnum = 10*threadnum + *s++ - '0';
00315                     if ( *s ) {
00316 #ifndef WITHMPI
00317                         if ( PF.me == MASTER )
00318 #endif
00319                             printf("Illegal value for option m or w: %s\n", t);
00320                             errorflag++;
00321                     }
00322                     if ( threadnum == 1 ) threadnum = 0; /*
00323                     threadnum++;
00324                     break;
00325                 case 'W': /* Print the wall-clock time on the master. */
00326                     AM.ggWTimeStatsFlag = 1;

```

```

00327                                     break;
00328 /*
00329         case 'n':
00330             Reserved for number of slaves without MPI
00331 */
00332         case 'p':
00333 #ifdef WITHEXTERNALCHANNEL
00334     /*There are two possibilities: -p|-pipe*/
00335     if(s[1]=='i'){
00336         if( (s[2]=='p') && (s[3]=='e') && (s[4]=='\0') ){
00337             argc--;
00338             /*Initialize pre-set external channels, see
00339             the file extcmd.c:*/
00340             if(initPresetExternalChannels(*argv++,AX.timeout)<1){
00341 #ifdef WITHMPI
00342                 if ( PF.me == MASTER )
00343 #endif
00344                 printf("Error initializing preset external channels\n");
00345                 errorflag++;
00346             }
00347             AX.timeout=-1; /*This indicates that preset channels
00348             are initialized from cmdline*/
00349         }else{
00350 #ifdef WITHMPI
00351             if ( PF.me == MASTER )
00352 #endif
00353             printf("Illegal option in call of FORM: %s\n",s);
00354             errorflag++;
00355         }
00356     }else
00357 #else
00358     if ( s[1] ) {
00359         if ( ( s[1]=='i' ) && ( s[2] == 'p' ) && ( s[3] == 'e' )
00360             && ( s[4] == '\0' ) ){
00361 #ifdef WITHMPI
00362             if ( PF.me == MASTER )
00363 #endif
00364             printf("Illegal option: Pipes not supported on this system.\n");
00365         }
00366         else {
00367 #ifdef WITHMPI
00368             if ( PF.me == MASTER )
00369 #endif
00370             printf("Illegal option: %s\n",s);
00371         }
00372         errorflag++;
00373     }
00374     else
00375 #endif
00376     {
00377         /* Next arg is a path variable like in environment */
00378         TAKEPATH(AM.Path)
00379     }
00380     break;
00381 case 'q': /* Quiet option. Only output. Same as -si */
00382     AM.silent = 1; break;
00383 case 'R': /* recover from saved snapshot */
00384     AC.CheckpointFlag = -1;
00385     break;
00386 case 's': /* Next arg is dir with form.set to be used */
00387     if ( ( s[1] == 'o' ) && ( s[2] == 'r' ) && ( s[3] == 't' ) ) {
00388         if(s[4]=='=' ) {
00389             AM.TempSortDir = s+5;
00390         }
00391         else {
00392             AM.TempSortDir = *argv++;
00393             argc--;
00394         }
00395     }
00396     else if ( s[1] == 'i' ) { /* compatibility: silent/quiet */
00397         AM.silent = 1;
00398     }
00399     else {
00400         TAKEPATH(AM.SetupDir)
00401     }
00402     break;
00403 case 'S': /* Next arg is setup file */
00404     TAKEPATH(AM.SetupFile) break;
00405 case 't': /* Next arg is directory for temp files */
00406     if ( s[1] == 's' ) {
00407         s++;
00408         AM.havesortdir = 1;
00409         TAKEPATH(AM.TempSortDir)
00410     }
00411     else {
00412         TAKEPATH(AM.TempDir)
00413     }

```

```

00414         break;
00415     case 'T': /* Print the total size used at end of job */
00416         AM.PrintTotalSize = 1; break;
00417     case 'v':
00418     printversion;;
00419     #ifdef WITHMPI
00420         if ( PF.me == MASTER )
00421     #endif
00422         PrintHeader(0);
00423         if ( onlyversion ) return(1);
00424         goto NoFile;
00425     case 'y': /* Preprocessor dumps output. No compilation. */
00426         AP.PreDebug = PREPROONLY; break;
00427     case 'z': /* The number following is a time limit in sec. */
00428         t = s++;
00429         AM.TimeLimit = 0;
00430         while ( *s >= '0' && *s <= '9' )
00431             AM.TimeLimit = 10*AM.TimeLimit + *s++ - '0';
00432         break;
00433     case 'Z': /* Removes the .str file on crash, no matter its contents */
00434         AM.ClearStore = 1; break;
00435     case '\0': /* "-" to use STDIN for the input. */
00436     #ifdef WITHMPI
00437         /* At the moment, ParFORM doesn't implement STDIN broadcasts. */
00438         if ( PF.me == MASTER )
00439             printf("Sorry, reading STDIN as input is currently not supported by
ParFORM\n");
00440         errorflag++;
00441     #endif
00442         AM.FromStdin = 1;
00443         AC.NoShowInput = 1; // disable input echoing by default
00444         break;
00445     default:
00446         if ( FG.cTable[*s] == 1 ) {
00447             AM.SkipClears = 0; t = s;
00448             while ( FG.cTable[*t] == 1 )
00449                 AM.SkipClears = 10*AM.SkipClears + *t++ - '0';
00450             if ( *t != 0 ) {
00451     #ifdef WITHMPI
00452                 if ( PF.me == MASTER )
00453     #endif
00454                 printf("Illegal numerical option in call of FORM: %s\n",s);
00455                 errorflag++;
00456             }
00457         }
00458         else {
00459     IllegalOption:
00460     #ifdef WITHMPI
00461         if ( PF.me == MASTER )
00462     #endif
00463         printf("Illegal option in call of FORM: %s\n",s);
00464         errorflag++;
00465     }
00466     break;
00467     }
00468     }
00469     else if ( argc == 0 && !AM.Interact ) AM.InputFileName = argv[-1];
00470     else {
00471     #ifdef WITHMPI
00472         if ( PF.me == MASTER )
00473     #endif
00474         printf("Illegal option in call of FORM: %s\n",s);
00475         errorflag++;
00476     }
00477     }
00478     AM.totalnumberofthreads = threadnum;
00479     if ( AM.InputFileName ) {
00480         if ( AM.FromStdin ) {
00481             printf("STDIN and the input filename cannot be specified simultaneously\n");
00482             errorflag++;
00483         }
00484         s = AM.InputFileName;
00485         while ( *s ) s++;
00486         if ( s < AM.InputFileName+4 ||
00487             s[-4] != '.' || s[-3] != 'f' || s[-2] != 'r' || s[-1] != 'm' ) {
00488             t = (UBYTE *)Malloc1((s-AM.InputFileName)+5,"adding .frm");
00489             s = AM.InputFileName;
00490             AM.InputFileName = t;
00491             while ( *s ) *t++ = *s++;
00492             *t++ = '.'; *t++ = 'f'; *t++ = 'r'; *t++ = 'm'; *t = 0;
00493         }
00494         if ( AM.LogType >= 0 && AM.LogFileName == 0 ) {
00495             AM.LogFileName = strDup1(AM.InputFileName,"name of logfile");
00496             s = AM.LogFileName;
00497             while ( *s ) s++;
00498             s[-3] = 'l'; s[-2] = 'o'; s[-1] = 'g';
00499         }

```

```

00500     }
00501 #ifndef WITHINTERACTION
00502     else if ( AM.Interact ) {
00503         if ( AM.LogType >= 0 ) {
00504             /*
00505                 We may have to do better than just taking a name.
00506                 It is not unique! This will be left for later.
00507             */
00508             AM.LogFileName = deflogname;
00509         }
00510     }
00511 #endif
00512     else if ( AM.FromStdin ) {
00513         /* Do nothing. */
00514     }
00515     else {
00516 NoFile:
00517 #ifdef WITHMPI
00518         if ( PF.me == MASTER )
00519 #endif
00520         printf("No filename specified in call of FORM\n");
00521         errorflag++;
00522     }
00523     if ( AM.Path == 0 ) AM.Path = (UBYTE *)getenv("FORMPATH");
00524     if ( AM.Path ) {
00525         /*
00526          * AM.Path is taken from argv or getenv. Reallocate it to avoid invalid
00527          * frees when AM.Path has to be changed.
00528          */
00529         AM.Path = strdup(AM.Path, "DoTail Path");
00530     }
00531     return(errorflag);
00532 }
00533
00534 /*
00535     #] DoTail :
00536     #[ OpenInput :
00537
00538     Major task here after opening is to skip the proper number of
00539     .clear instructions if so desired without using interpretation
00540 */
00541
00542 int OpenInput(void)
00543 {
00544     int oldNoShowInput = AC.NoShowInput;
00545     UBYTE c;
00546     if ( !AM.Interact ) {
00547         if ( AM.FromStdin ) {
00548             if ( OpenStream(0, INPUTSTREAM, 0, PRENOACTION) == 0 ) {
00549                 Error0("Cannot open STDIN");
00550                 return(-1);
00551             }
00552         }
00553         else {
00554             if ( OpenStream(AM.InputFileName, FILESTREAM, 0, PRENOACTION) == 0 ) {
00555                 Error1("Cannot open file", AM.InputFileName);
00556                 return(-1);
00557             }
00558             if ( AC.CurrentStream->inbuffer <= 0 ) {
00559                 Error1("No input in file", AM.InputFileName);
00560                 return(-1);
00561             }
00562         }
00563         AC.NoShowInput = 1;
00564         while ( AM.SkipClears > 0 ) {
00565             c = GetInput();
00566             if ( c == ENDOFINPUT ) {
00567                 Error0("Not enough .clear instructions in input file");
00568             }
00569             if ( c == '\\\\' ) {
00570                 c = GetInput();
00571                 if ( c == ENDOFINPUT )
00572                     Error0("Not enough .clear instructions in input file");
00573                 continue;
00574             }
00575             if ( c == ' ' || c == '\t' ) continue;
00576             if ( c == '.' ) {
00577                 c = GetInput();
00578                 if ( tolower(c) == 'c' ) {
00579                     c = GetInput();
00580                     if ( tolower(c) == 'l' ) {
00581                         c = GetInput();
00582                         if ( tolower(c) == 'e' ) {
00583                             c = GetInput();
00584                             if ( tolower(c) == 'a' ) {
00585                                 c = GetInput();
00586                                 if ( tolower(c) == 'r' ) {

```

```

00587             c = GetInput();
00588             if ( FG.cTable[c] > 2 ) {
00589                 AM.SkipClears--;
00590             }
00591         }
00592     }
00593 }
00594 }
00595 }
00596 while ( c != '\n' && c != '\r' && c != ENDOFINPUT ) {
00597     c = GetInput();
00598     if ( c == '\\ ' ) c = GetInput();
00599 }
00600 }
00601 else if ( c == '\n' || c == '\r' ) continue;
00602 else {
00603     while ( ( c = GetInput() ) != '\n' && c != '\r' ) {
00604         if ( c == ENDOFINPUT ) {
00605             Error0("Not enough .clear instructions in input file");
00606         }
00607     }
00608 }
00609 }
00610 AC.NoShowInput = oldNoShowInput;
00611 }
00612 if ( AM.LogFileName ) {
00613 #ifndef WITHMPI
00614     if ( PF.me != MASTER ) {
00615         /*
00616          * Only the master writes to the log file. On slaves, we need
00617          * a dummy handle, without opening the file.
00618          */
00619         extern FILES **filelist; /* in tools.c */
00620         int i = CreateHandle();
00621         RWLOCKW(AM.handlelock);
00622         filelist[i] = (FILES *)123; /* Must be nonzero to prevent a reuse in CreateHandle. */
00623         UNRWLOCK(AM.handlelock);
00624         AC.LogHandle = i;
00625     }
00626     else
00627 #endif
00628         if ( AC.CheckpointFlag != -1 ) {
00629             if ( ( AC.LogHandle = CreateLogFile((char *) (AM.LogFileName)) ) < 0 ) {
00630                 Error1("Cannot create logfile", AM.LogFileName);
00631                 return(-1);
00632             }
00633         }
00634         else {
00635             if ( ( AC.LogHandle = OpenAddFile((char *) (AM.LogFileName)) ) < 0 ) {
00636                 Error1("Cannot re-open logfile", AM.LogFileName);
00637                 return(-1);
00638             }
00639         }
00640     }
00641     return(0);
00642 }
00643
00644 /*
00645     #] OpenInput :
00646     #[ ReserveTempFiles :
00647
00648     Order of preference:
00649     a: if there is a path in the commandtail, take that.
00650     b: if none, try in the form.set file.
00651     c: if still none, try in the environment for the variable FORMTMP
00652     d: if still none, try the current directory.
00653
00654     The parameter indicates action in the case of multithreaded running.
00655     par = 0 : We just run on a single processor. Keep everything normal.
00656     par = 1 : Multithreaded running startup phase 1.
00657     par = 2 : Multithreaded running startup phase 2.
00658 */
00659
00660 UBYTE *emptystring = (UBYTE *)".";
00661 UBYTE *defaulttempfilename = (UBYTE *)"xformxxx.str";
00662 /* This is the length of the above default, but with 7 spaces for PID digits
00663    instead of the "xxx". (Previously FORM used 5 digits and this value was 14) */
00664 #define DEFAULTFNAMLENGTH 16
00665
00666 void ReserveTempFiles(int par)
00667 {
00668     GETIDENTITY
00669     SETUPPARAMETERS *sp;
00670     UBYTE *s, *t, *tendir, *tendir2, c;
00671     int i = 0;
00672     WORD j;
00673     if ( par == 0 || par == 1 ) {

```

```

00674     if ( AM.TempDir == 0 ) {
00675         sp = GetSetupPar((UBYTE *)"tempdir");
00676         if ( ( sp->flags & USEDFLAG ) != USEDFLAG ) {
00677             AM.TempDir = (UBYTE *)getenv("FORMTMP");
00678             if ( AM.TempDir == 0 ) AM.TempDir = emptystring;
00679         }
00680         else AM.TempDir = (UBYTE *) (sp->value);
00681     }
00682     if ( AM.TempSortDir == 0 ) {
00683         if ( AM.havesortdir ) {
00684             sp = GetSetupPar((UBYTE *)"tempSortdir");
00685             AM.TempSortDir = (UBYTE *) (sp->value);
00686         }
00687         else {
00688             AM.TempSortDir = (UBYTE *)getenv("FORMTMPSORT");
00689             if ( AM.TempSortDir == 0 ) AM.TempSortDir = AM.TempDir;
00690         }
00691     }
00692     /*
00693     We have now in principle a path but we will use its first element only.
00694     Later that should become more complicated. Then we will use a path and
00695     when one device is full we can continue on the next one.
00696     */
00697     s = AM.TempDir; i = 200; /* Some extra for VMS */
00698     while ( *s && *s != PATHSEPARATOR ) { if ( *s == '\\ ' ) s++; s++; i++; }
00699     FG.fnamesize = sizeof(UBYTE)*(i+DEFAULTFNAMELENGTH);
00700     FG.fname = (char *)Malloc1(FG.fnamesize,"name for temporary files");
00701     s = AM.TempDir; t = (UBYTE *)FG.fname;
00702     while ( *s && *s != PATHSEPARATOR ) { if ( *s == '\\ ' ) s++; *t++ = *s++; }
00703     if ( (char *)t > FG.fname && t[-1] != SEPARATOR && t[-1] != ALTSEPARATOR )
00704         *t++ = SEPARATOR;
00705     *t = 0;
00706     tenddir = t;
00707     FG.fnamebase = t-(UBYTE *) (FG.fname);
00708
00709     s = AM.TempSortDir; i = 200; /* Some extra for VMS */
00710     while ( *s && *s != PATHSEPARATOR ) { if ( *s == '\\ ' ) s++; s++; i++; }
00711
00712     FG.fname2size = sizeof(UBYTE)*(i+DEFAULTFNAMELENGTH);
00713     FG.fname2 = (char *)Malloc1(FG.fname2size,"name for sort files");
00714     s = AM.TempSortDir; t = (UBYTE *)FG.fname2;
00715     while ( *s && *s != PATHSEPARATOR ) { if ( *s == '\\ ' ) s++; *t++ = *s++; }
00716     if ( (char *)t > FG.fname2 && t[-1] != SEPARATOR && t[-1] != ALTSEPARATOR )
00717         *t++ = SEPARATOR;
00718     *t = 0;
00719     tenddir2 = t;
00720     FG.fname2base = t-(UBYTE *) (FG.fname2);
00721
00722     t = tenddir;
00723     s = defaulttmpfilename;
00724     #ifdef WITHMPI
00725     {
00726         int iii;
00727         iii = sprintf((char*)t,FG.fnamesize-((char*)t-FG.fname),"%.d",PF.me);
00728         t+= iii;
00729         s+= iii; /* in case defaulttmpfilename is too short */
00730     }
00731     #endif
00732     while ( *s ) *t++ = *s++;
00733     *t = 0;
00734     /*
00735     There are problems when running many FORM jobs at the same time
00736     from make or minos. If they start up simultaneously, occasionally
00737     they can make the same .str file. We prevent this with first trying
00738     a file that contains the digits of the pid. If this file
00739     has already been taken we fall back on the old scheme.
00740     The whole is controlled with the -M (MultiRun) parameter in the
00741     command tail.
00742     */
00743     if ( AM.MultiRun ) {
00744         int num = ((int)GetPID())%10000000;
00745         t += 4;
00746         *t = 0;
00747         t[-1] = 'r';
00748         t[-2] = 't';
00749         t[-3] = 's';
00750         t[-4] = '.';
00751         t[-5] = (UBYTE) ('0' + num%10);
00752         t[-6] = (UBYTE) ('0' + (num/10)%10);
00753         t[-7] = (UBYTE) ('0' + (num/100)%10);
00754         t[-8] = (UBYTE) ('0' + (num/1000)%10);
00755         t[-9] = (UBYTE) ('0' + (num/10000)%10);
00756         t[-10] = (UBYTE) ('0' + (num/100000)%10);
00757         t[-11] = (UBYTE) ('0' + num/1000000);
00758         if ( ( AC.StoreHandle = CreateFile((char *)FG.fname) ) < 0 ) {
00759             t[-5] = 'x'; t[-6] = 'x'; t[-7] = 'x'; t[-8] = 'x'; t[-9] = 'x'; t[-10] = 'x'; t[-11] =

```

```

00760         goto classic;
00761     }
00762 }
00763 else
00764 {
00765 classic;;
00766     for(;;) {
00767         if ( ( AC.StoreHandle = OpenFile((char *)FG.fname) ) < 0 ) {
00768             if ( ( AC.StoreHandle = CreateFile((char *)FG.fname) ) >= 0 ) break;
00769         }
00770         else CloseFile(AC.StoreHandle);
00771         c = t[-5];
00772         if ( c == 'x' ) t[-5] = '0';
00773         else if ( c == '9' ) {
00774             t[-5] = '0';
00775             c = t[-6];
00776             if ( c == 'x' ) t[-6] = '0';
00777             else if ( c == '9' ) {
00778                 t[-6] = '0';
00779                 c = t[-7];
00780                 if ( c == 'x' ) t[-7] = '0';
00781                 else if ( c == '9' ) {
00782 /*
00783             Note that we tried 1111 names!
00784 */
00785             MesPrint("Name space for temp files exhausted");
00786             t[-7] = 0;
00787             MesPrint("Please remove files of the type %s or try a different directory"
00788                 ,FG.fname);
00789             Terminate(-1);
00790         }
00791         else t[-7] = (UBYTE)(c+1);
00792     }
00793     else t[-6] = (UBYTE)(c+1);
00794 }
00795     else t[-5] = (UBYTE)(c+1);
00796 }
00797 }
00798 /*
00799 Now we should make sure that the tempsortdir cq tempsortfilename makes it
00800 into a similar construction.
00801 */
00802 s = tenddir; t = tenddir2; while ( *s ) *t++ = *s++;
00803 *t = 0;
00804
00805 /*
00806 Now we should assign a name to the main sort file and the two stage 4 files.
00807 */
00808 AM.S0->file.name = (char *)Malloc1(sizeof(char)*(i+DEFAULTFNAMELENGTH),"name for temporary
files");
00809 s = (UBYTE *)AM.S0->file.name;
00810 t = (UBYTE *)FG.fname2;
00811 i = 1;
00812 while ( *t ) { *s++ = *t++; i++; }
00813 s[-2] = 'o'; *s = 0;
00814 }
00815 /*
00816 Try to create the sort file already, so we can Terminate earlier if this fails.
00817 */
00818 #ifdef WITHPTHREADS
00819 if ( par <= 1 ) {
00820 #endif
00821     if ( ( AM.S0->file.handle = CreateFile((char *)AM.S0->file.name) ) < 0 ) {
00822         MesPrint("Could not create sort file: %s", AM.S0->file.name);
00823         Terminate(-1);
00824     };
00825     /* Close and clean up the test file */
00826     CloseFile(AM.S0->file.handle);
00827     AM.S0->file.handle = -1;
00828     remove(AM.S0->file.name);
00829 #ifdef WITHPTHREADS
00830 }
00831 #endif
00832 /*
00833 With the stage4 and scratch file names we have to be a bit more careful.
00834 They are to be allocated after the threads are initialized when there
00835 are threads of course.
00836 */
00837 if ( par == 0 ) {
00838     s = (UBYTE *)((void *) (FG.fname2)); i = 0;
00839     while ( *s ) { s++; i++; }
00840     /* +1 for null terminator */
00841     s = (UBYTE *)Malloc1(sizeof(char)*(i+1),"name for stage4 file a");
00842     AR.FoStage4[1].name = (char *)s;
00843     t = (UBYTE *)FG.fname2;
00844     while ( *t ) *s++ = *t++;
00845     s[-2] = '4'; s[-1] = 'a'; *s = 0;

```



```

00846     s = (UBYTE *) ((void *) (FG.fname)); i = 0;
00847     while ( *s ) { s++; i++; }
00848     /* +1 for null terminator */
00849     s = (UBYTE *) Malloc1(sizeof(char)*(i+1), "name for stage4 file b");
00850     AR.FoStage4[0].name = (char *)s;
00851     t = (UBYTE *)FG.fname;
00852     while ( *t ) *s++ = *t++;
00853     s[-2] = '4'; s[-1] = 'b'; *s = 0;
00854     for ( j = 0; j < 3; j++ ) {
00855         /* +1 for null terminator */
00856         s = (UBYTE *) Malloc1(sizeof(char)*(i+1), "name for scratch file");
00857         AR.Fscr[j].name = (char *)s;
00858         t = (UBYTE *)FG.fname;
00859         while ( *t ) *s++ = *t++;
00860         s[-2] = 'c'; s[-1] = (UBYTE) ('0'+j); *s = 0;
00861     }
00862 }
00863 #ifdef WITHPTHREADS
00864     else if ( par == 2 ) {
00865         size_t tname;
00866         s = (UBYTE *) ((void *) (FG.fname2)); i = 0;
00867         while ( *s ) { s++; i++; }
00868         /* +1 for null terminator, +10 for 32bit int, +1 for "." */
00869         tname = sizeof(char)*(i+12);
00870         s = (UBYTE *) Malloc1(tname, "name for stage4 file a");
00871         snprintf((char *)s, tname, "%s.%d", FG.fname2, AT.identity);
00872         s[i-2] = '4'; s[i-1] = 'a';
00873         AR.FoStage4[1].name = (char *)s;
00874         s = (UBYTE *) ((void *) (FG.fname)); i = 0;
00875         while ( *s ) { s++; i++; }
00876         /* +1 for null terminator, +10 for 32bit int, +1 for "." */
00877         tname = sizeof(char)*(i+12);
00878         s = (UBYTE *) Malloc1(tname, "name for stage4 file b");
00879         snprintf((char *)s, tname, "%s.%d", FG.fname, AT.identity);
00880         s[i-2] = '4'; s[i-1] = 'b';
00881         AR.FoStage4[0].name = (char *)s;
00882         if ( AT.identity == 0 ) {
00883             for ( j = 0; j < 3; j++ ) {
00884                 /* +1 for null terminator */
00885                 s = (UBYTE *) Malloc1(sizeof(char)*(i+1), "name for scratch file");
00886                 AR.Fscr[j].name = (char *)s;
00887                 t = (UBYTE *)FG.fname;
00888                 while ( *t ) *s++ = *t++;
00889                 s[-2] = 'c'; s[-1] = (UBYTE) ('0'+j); *s = 0;
00890             }
00891         }
00892     }
00893 #endif
00894 }
00895
00896 /*
00897     #] ReserveTempFiles :
00898     #[ StartVariables :
00899 */
00900
00901 #ifdef WITHPTHREADS
00902 ALLPRIVATES *DummyPointer = 0;
00903 #endif
00904
00905 void StartVariables(void)
00906 {
00907     int i, ii;
00908     PUTZERO(AM.zeropos);
00909     StartPrepro();
00910     /*
00911         The module counter:
00912     */
00913     AC.CModule=0;
00914 #ifdef WITHPTHREADS
00915     /*
00916         We need a value in AB because in the startup some routines may call AB[0].
00917     */
00918     AB = (ALLPRIVATES **) &DummyPointer;
00919 #endif
00920     /*
00921         separators used to delimit arguments in #call and #do, by default ', ' and '|':
00922         Be sure, it is en empty set:
00923     */
00924     set_sub(AC.separators, AC.separators, AC.separators);
00925     set_set(' ', AC.separators);
00926     set_set('|', AC.separators);
00927
00928     AM.BracketFactors[0] = 8;
00929     AM.BracketFactors[1] = SYMBOL;
00930     AM.BracketFactors[2] = 4;
00931     AM.BracketFactors[3] = FACTORSYMBOL;
00932     AM.BracketFactors[4] = 1;

```

```

00933     AM.BraceFactors[5] = 1;
00934     AM.BraceFactors[6] = 1;
00935     AM.BraceFactors[7] = 3;
00936
00937     AM.SkipClears = 0;
00938     AC.Cnumpows = 0;
00939     AC.OutputMode = 72;
00940     AC.OutputSpaces = NORMALFORMAT;
00941     AC.LineLength = 79;
00942     AM.gIsFortran90 = AC.IsFortran90 = ISNOTFORTRAN90;
00943     AM.gFortran90Kind = AC.Fortran90Kind = 0;
00944     AM.gCnumpows = 0;
00945     AC.exprfillwarning = 0;
00946     AM.gLineLength = 79;
00947     AM.OutBufSize = 80;
00948     AM.MaxStreamSize = MAXFILESTREAMSIZE;
00949     AP.MaxPreAssignLevel = 4;
00950     AC.iBufferSize = 512;
00951     AP.pSize = 128;
00952     AP.MaxPreIfLevel = 10;
00953     AP.cComChar = AP.ComChar = '*';
00954     AP.firstnamespace = 0;
00955     AP.lastnamespace = 0;
00956     AP.fullnamesize = 127;
00957     AP.fullname = (UBYTE *)Malloc1((AP.fullnamesize+1)*sizeof(UBYTE), "AP.fullname");
00958     AM.OffsetVector = -2*WILDOFFSET+MINSPEC;
00959     AC.cbuffList.num = 0;
00960     AM.hparallelflag = AM.gparallelflag =
00961     AC.parallelflag = AC.mparallelflag = PARALLELFLAG;
00962 #ifdef WITHMPI
00963     if ( PF.numtasks < 2 ) AM.hparallelflag |= NOPARALLEL_NPROC;
00964 #endif
00965     AC.tablefilling = 0;
00966     AC.models = 0;
00967     AC.nummodels = 0;
00968     AC.ModelLevel = 0;
00969     AC.modelspace = 0;
00970     AM.resetTimeOnClear = 1;
00971     AM.gnumextrasym = AM.ggnumextrasym = 0;
00972     AM.havesortdir = 0;
00973     AM.SpectatorFiles = 0;
00974     AM.NumSpectatorFiles = 0;
00975     AM.SizeForSpectatorFiles = 0;
00976 /*
00977     Information for the lists of variables. Part of error message and size:
00978 */
00979     AP.ProcList.message = "procedure";
00980     AP.ProcList.size = sizeof(PROCEDURE);
00981     AP.LoopList.message = "doloop";
00982     AP.LoopList.size = sizeof(DOLOOP);
00983     AP.PreVarList.message = "PreVariable";
00984     AP.PreVarList.size = sizeof(PREVAR);
00985     AC.SymbolList.message = "symbol";
00986     AC.SymbolList.size = sizeof(struct SyMbOl);
00987     AC.IndexList.message = "index";
00988     AC.IndexList.size = sizeof(struct InDeX);
00989     AC.VectorList.message = "vector";
00990     AC.VectorList.size = sizeof(struct VeCtOr);
00991     AC.FunctionList.message = "function";
00992     AC.FunctionList.size = sizeof(struct FuNcTiOn);
00993     AC.SetList.message = "set";
00994     AC.SetList.size = sizeof(struct SeTs);
00995     AC.SetElementList.message = "set element";
00996     AC.SetElementList.size = sizeof(WORD);
00997     AC.ExpressionList.message = "expression";
00998     AC.ExpressionList.size = sizeof(struct ExPrEsSiOn);
00999     AC.cbuffList.message = "compiler buffer";
01000     AC.cbuffList.size = sizeof(CBUF);
01001     AC.Channellist.message = "channel buffer";
01002     AC.Channellist.size = sizeof(CHANNEL);
01003     AP.DollarList.message = "$-variable";
01004     AP.DollarList.size = sizeof(struct DoLLaRS);
01005     AC.DubiousList.message = "ambiguous variable";
01006     AC.DubiousList.size = sizeof(struct DuBiOuS);
01007     AC.TableBaseList.message = "list of tablebases";
01008     AC.TableBaseList.size = sizeof(DBASE);
01009     AC.TestValue = 0;
01010     AC.InnerTest = 0;
01011
01012     AC.AutoSymbolList.message = "autosymbol";
01013     AC.AutoSymbolList.size = sizeof(struct SyMbOl);
01014     AC.AutoIndexList.message = "autoindex";
01015     AC.AutoIndexList.size = sizeof(struct InDeX);
01016     AC.AutoVectorList.message = "autovector";
01017     AC.AutoVectorList.size = sizeof(struct VeCtOr);
01018     AC.AutoFunctionList.message = "autofunction";
01019     AC.AutoFunctionList.size = sizeof(struct FuNcTiOn);

```

```

01020     AC.PotModDolList.message = "potentially modified dollar";
01021     AC.PotModDolList.size = sizeof(WORD);
01022     AC.ModOptDolList.message = "moduleoptiondollar";
01023     AC.ModOptDolList.size = sizeof(MODOPTDOLLAR);
01024
01025     AO.FortDotChar = '-';
01026     AO.ErrorBlock = 0;
01027     AC.firstconstindex = 1;
01028     AO.Optimize.mctsconstant.fval = 1.0;
01029     AO.Optimize.horner = O_MCTS;
01030     AO.Optimize.hornerdirection = O_FORWARDORBACKWARD;
01031     AO.Optimize.method = O_GREEDY;
01032     AO.Optimize.mctstimelimit = 0;
01033     AO.Optimize.mctsnumexpand = 1000;
01034     AO.Optimize.mctsnumkeep = 10;
01035     AO.Optimize.mctsnumrepeat = 1;
01036     AO.Optimize.greedytimelimit = 0;
01037     AO.Optimize.greedyminnum = 10;
01038     AO.Optimize.greedymaxperc = 5;
01039     AO.Optimize.printstats = 0;
01040     AO.Optimize.debugflags = 0;
01041     AO.OptimizeResult.code = NULL;
01042     AO.inscheme = 0;
01043     AO.schemenum = 0;
01044     AO.wpos = 0;
01045     AO.wpoin = 0;
01046     AO.wlen = 0;
01047     AM.dollarzero = 0;
01048     AC.doloopstack = 0;
01049     AC.doloopstacksize = 0;
01050     AC.dolooplevel = 0;
01051 /*
01052     Set up the main name trees:
01053 */
01054     AC.varnames = MakeNameTree();
01055     AC.exprnames = MakeNameTree();
01056     AC.dollarnames = MakeNameTree();
01057     AC.autonames = MakeNameTree();
01058     AC.activenames = &(AC.varnames);
01059     AP.preError = 0;
01060 /*
01061     Initialize the compiler:
01062 */
01063     inictable();
01064     AM.rbufnum = inicbufs(); /* Regular compiler buffer */
01065 #ifndef WITHPTHREADS
01066     AT.ebufnum = inicbufs(); /* Buffer for extras during execution */
01067     AT.fbufnum = inicbufs(); /* Buffer for caching in factorization */
01068     AT.allbufnum = inicbufs(); /* Buffer for id,all */
01069     AT.aebufnum = inicbufs(); /* Buffer for id,all */
01070     AN.tryterm = 0;
01071 #else
01072     AS.MasterSort = 0;
01073 #endif
01074     AM.dbufnum = inicbufs(); /* Buffer for dollar variables */
01075     AM.sbufnum = inicbufs(); /* Subterm buffer for polynomials and optimization */
01076     AC.ffbufnum = inicbufs(); /* Buffer number for user defined factorizations */
01077     AM.zbufnum = inicbufs(); /* For very special values */
01078     {
01079         CBUF *C = cbuf+AM.zbufnum;
01080         WORD one[5] = {4,1,1,3,0};
01081         WORD zero = 0;
01082         AddRHS(AM.zbufnum,1);
01083         AM.zerorhs = C->numrhs;
01084         AddNtoC(AM.zbufnum,1,&zero,17);
01085         AddRHS(AM.zbufnum,1);
01086         AM.onerhs = C->numrhs;
01087         AddNtoC(AM.zbufnum,5,one,17);
01088     }
01089     AP.inside.inscbuf = inicbufs(); /* For the #inside instruction */
01090 /*
01091     Enter the built in objects
01092 */
01093     AC.Symbols = &(AC.SymbolList);
01094     AC.Indices = &(AC.IndexList);
01095     AC.Vectors = &(AC.VectorList);
01096     AC.Functions = &(AC.FunctionList);
01097     AC.vetofilling = 0;
01098
01099     AddDollar((UBYTE *) "$", DOLUNDEFINED, 0, 0);
01100
01101     cbuf[AM.dbufnum].mnumlhs = cbuf[AM.dbufnum].numlhs;
01102     cbuf[AM.dbufnum].mnumrhs = cbuf[AM.dbufnum].numrhs;
01103
01104     AddSymbol((UBYTE *) "i_", -MAXPOWER, MAXPOWER, VARTYPEIMAGINARY, 0);
01105     AddSymbol((UBYTE *) "pi_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01106 /*

```

```

01107     coeff_ should have the number COEFFSYMBOL and den_ the number DENOMINATOR
01108     and the three should be in this order!
01109 */
01110     AddSymbol((UBYTE *)"coeff_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01111     AddSymbol((UBYTE *)"num_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01112     AddSymbol((UBYTE *)"den_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01113     AddSymbol((UBYTE *)"xarg_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01114     AddSymbol((UBYTE *)"dimension_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01115     AddSymbol((UBYTE *)"factor_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01116     AddSymbol((UBYTE *)"sep_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01117     AddSymbol((UBYTE *)"ee_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01118     AddSymbol((UBYTE *)"em_", -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01119     i = BUILTINSYMBOLS; /* update this in ftypes.h when we add new symbols */
01120 */
01121     Next we add a number of dummy symbols for ensuring that the user defined
01122     symbols start at a fixed given number FIRSTUSERSYMBOL
01123     We do want to give them unique names though that the user cannot access.
01124 */
01125     {
01126         char dumstr[20];
01127         for ( ; i < FIRSTUSERSYMBOL; i++ ) {
01128             snprintf(dumstr, 20, ":%d:", i);
01129             AddSymbol((UBYTE *)dumstr, -MAXPOWER, MAXPOWER, VARTYPENONE, 0);
01130         }
01131     }
01132
01133     AddIndex((UBYTE *)"iarg_", 4, 0);
01134     AddVector((UBYTE *)"parg_", VARTYPENONE, 0);
01135
01136     AM.NumFixedFunctions = sizeof(fixedfunctions)/sizeof(struct fixedfun);
01137     for ( i = 0; i < AM.NumFixedFunctions; i++ ) {
01138         ii = AddFunction((UBYTE *)fixedfunctions[i].name
01139             , fixedfunctions[i].commu
01140             , fixedfunctions[i].tensor
01141             , fixedfunctions[i].complx
01142             , fixedfunctions[i].symmetric
01143             , 0, -1, -1);
01144         if ( fixedfunctions[i].tensor == GAMMAFUNCTION )
01145             functions[ii].flags |= COULDCOMMUTE;
01146     }
01147 */
01148     Next we add a number of dummy functions for ensuring that the user defined
01149     functions start at a fixed given number FIRSTUSERFUNCTION.
01150     We do want to give them unique names though that the user cannot access.
01151 */
01152     {
01153         char dumstr[20];
01154         for ( ; i < FIRSTUSERFUNCTION-FUNCTION; i++ ) {
01155             snprintf(dumstr, 20, ":%d::%d:", i);
01156             AddFunction((UBYTE *)dumstr, 0, 0, 0, 0, 0, -1, -1);
01157         }
01158     }
01159     AM.NumFixedSets = sizeof(fixedsets)/sizeof(struct fixedset);
01160     for ( i = 0; i < AM.NumFixedSets; i++ ) {
01161         ii = AddSet((UBYTE *)fixedsets[i].name, fixedsets[i].dimension);
01162         Sets[ii].type = fixedsets[i].type;
01163     }
01164     AM.RepMax = MAXREPEAT;
01165 #ifndef WITHPTHREADS
01166     AT.RepCount = (int *)Malloc1((LONG)((AM.RepMax+3)*sizeof(int)), "repeat buffers");
01167     AN.RepPoint = AT.RepCount;
01168     AT.RepTop = AT.RepCount + AM.RepMax;
01169     AN.polysortflag = 0;
01170     AN.subsubveto = 0;
01171 #endif
01172     AC.NumWildcardNames = 0;
01173     AC.WildcardBufferSize = 50;
01174     AC.WildcardNames = (UBYTE *)Malloc1((LONG)AC.WildcardBufferSize, "argument list names");
01175 #ifndef WITHPTHREADS
01176     AT.WildArgTaken = (WORD *)Malloc1((LONG)AC.WildcardBufferSize*sizeof(WORD)/2
01177         , "argument list names");
01178     AT.WildcardBufferSize = AC.WildcardBufferSize;
01179     AR.CompareRoutine = (COMPAREDUMMY)(&Compare1);
01180     AT.nfac = AT.nBer = 0;
01181     AT.factorials = 0;
01182     AT.bernoullis = 0;
01183     AR.wranfia = 0;
01184     AR.wranfcall = 0;
01185     AR.wranfnpair1 = NPAIR1;
01186     AR.wranfnpair2 = NPAIR2;
01187     AR.wranfseed = 0;
01188 #endif
01189     AM.atstartup = 1;
01190     AM.oldnumextrasyms = strDup1((UBYTE *)"OLDNUMEXTRASYNBOLS_", "oldnumextrasyms");
01191     PutPreVar((UBYTE *)"VERSION_", (UBYTE *)STRINGIFY(MAJORVERSION), 0, 0);
01192     PutPreVar((UBYTE *)"SUBVERSION_", (UBYTE *)STRINGIFY(MINORVERSION), 0, 0);
01193     PutPreVar((UBYTE *)"DATE_", (UBYTE *)MakeDate(), 0, 0);

```

```

01194     PutPreVar((UBYTE *)"random_", (UBYTE *)"_____", 0,0);
01195     PutPreVar((UBYTE *)"optimminvar_", (UBYTE *)("0"), 0,0);
01196     PutPreVar((UBYTE *)"optimmaxvar_", (UBYTE *)("0"), 0,0);
01197     PutPreVar(AM.oldnumextrasyms, (UBYTE *)("0"), 0,0);
01198     PutPreVar((UBYTE *)"optimvalue_", (UBYTE *)("0"), 0,0);
01199     PutPreVar((UBYTE *)"optimscheme_", (UBYTE *)("0"), 0,0);
01200     PutPreVar((UBYTE *)"tolower_", (UBYTE *)("0"), 0,0);
01201     PutPreVar((UBYTE *)"toupper_", (UBYTE *)("0"), 0,0);
01202     PutPreVar((UBYTE *)"takeleft_", (UBYTE *)("0"), 0,0);
01203     PutPreVar((UBYTE *)"takeright_", (UBYTE *)("0"), 0,0);
01204     PutPreVar((UBYTE *)"keepleft_", (UBYTE *)("0"), 0,0);
01205     PutPreVar((UBYTE *)"keepright_", (UBYTE *)("0"), 0,0);
01206     PutPreVar((UBYTE *)"SYSTEMERROR_", (UBYTE *)("0"), 0,0);
01207 /*
01208     Next are the flags to control diagram generation filters
01209 */
01210     #define STR2(x) #x
01211     #define STR(x) STR2(x)
01212     PutPreVar((UBYTE *)"TOPOLOGIESONLY_" , (UBYTE*)(STR(TOPOLOGIESONLY)) , 0,0);
01213     PutPreVar((UBYTE *)"WITHOUTNODES_" , (UBYTE*)(STR(WITHOUTNODES)) , 0,0);
01214     PutPreVar((UBYTE *)"WITHEDGES_" , (UBYTE*)(STR(WITHEDGES)) , 0,0);
01215     PutPreVar((UBYTE *)"WITHBLOCKS_" , (UBYTE*)(STR(WITHBLOCKS)) , 0,0);
01216     PutPreVar((UBYTE *)"WITHONEPISETS_" , (UBYTE*)(STR(WITHONEPISETS)) , 0,0);
01217     PutPreVar((UBYTE *)"WITHSYMMETRIZEI_" , (UBYTE*)(STR(WITHSYMMETRIZEI)) , 0,0);
01218     PutPreVar((UBYTE *)"WITHSYMMETRIZEF_" , (UBYTE*)(STR(WITHSYMMETRIZEF)) , 0,0);
01219     // This is not an "option" preprocessor var but is set by "external" particle definitions
01220 //     PutPreVar((UBYTE *)"CHECKEXTERN_" , (UBYTE*)(STR(CHECKEXTERN)) , 0,0);
01221     PutPreVar((UBYTE *)"ONEPI_" , (UBYTE*)(STR(ONEPARTI)) , 0,0);
01222     PutPreVar((UBYTE *)"ONEPR_" , (UBYTE*)(STR(ONEPARTR)) , 0,0);
01223     PutPreVar((UBYTE *)"ONSHELL_" , (UBYTE*)(STR(ONSHELL)) , 0,0);
01224     PutPreVar((UBYTE *)"OFFSHELL_" , (UBYTE*)(STR(OFFSHELL)) , 0,0);
01225     PutPreVar((UBYTE *)"NOSIGMA_" , (UBYTE*)(STR(NOSIGMA)) , 0,0);
01226     PutPreVar((UBYTE *)"SIGMA_" , (UBYTE*)(STR(SIGMA)) , 0,0);
01227     PutPreVar((UBYTE *)"NOSNAIL_" , (UBYTE*)(STR(NOSNAIL)) , 0,0);
01228     PutPreVar((UBYTE *)"SNAIL_" , (UBYTE*)(STR(SNAIL)) , 0,0);
01229     PutPreVar((UBYTE *)"NOTADPOLE_" , (UBYTE*)(STR(NOTADPOLE)) , 0,0);
01230     PutPreVar((UBYTE *)"TADPOLE_" , (UBYTE*)(STR(TADPOLE)) , 0,0);
01231     PutPreVar((UBYTE *)"SIMPLE_" , (UBYTE*)(STR(SIMPLE)) , 0,0);
01232     PutPreVar((UBYTE *)"NOTSIMPLE_" , (UBYTE*)(STR(NOTSIMPLE)) , 0,0);
01233     PutPreVar((UBYTE *)"BIPART_" , (UBYTE*)(STR(BIPART)) , 0,0);
01234     PutPreVar((UBYTE *)"NONBIPART_" , (UBYTE*)(STR(NONBIPART)) , 0,0);
01235     PutPreVar((UBYTE *)"CYCLI_" , (UBYTE*)(STR(CYCLI)) , 0,0);
01236     PutPreVar((UBYTE *)"CYCLR_" , (UBYTE*)(STR(CYCLR)) , 0,0);
01237     PutPreVar((UBYTE *)"FLOOP_" , (UBYTE*)(STR(FLOOP)) , 0,0);
01238     PutPreVar((UBYTE *)"NOTFLOOP_" , (UBYTE*)(STR(NOTFLOOP)) , 0,0);
01239
01240     {
01241         char buf[41]; /* up to 128-bit */
01242         LONG pid;
01243         #ifndef WITHMPI
01244             pid = GetPID();
01245         #else
01246             pid = ( PF.me == MASTER ) ? GetPID() : (LONG)0;
01247             pid = PF_BroadcastNumber(pid);
01248         #endif
01249         LongCopy(pid,buf);
01250         PutPreVar((UBYTE *)"PID_" , (UBYTE *)buf, 0,0);
01251     }
01252     AM.atstartup = 0;
01253     AP.MaxPreTypes = 10;
01254     AP.NumPreTypes = 0;
01255     AP.PreTypes = (int *)Malloc1(sizeof(int)*(AP.MaxPreTypes+1),"preprocessor types");
01256     AP.inside.buffer = 0;
01257     AP.inside.size = 0;
01258
01259     AC.SortType = AC.lSortType = AM.gSortType = SORTLOWFIRST;
01260     #ifdef WITHPTHREADS
01261     #else
01262         AR.SortType = AC.SortType;
01263     #endif
01264     AC.LogHandle = -1;
01265     AC.SetList.numtemp = AC.SetList.num;
01266     AC.SetElementList.numtemp = AC.SetElementList.num;
01267
01268     GetName(AC.varnames, (UBYTE *)"exp_" , &AM.expnum, NOAUTO);
01269     GetName(AC.varnames, (UBYTE *)"denom_" , &AM.denomnum, NOAUTO);
01270     GetName(AC.varnames, (UBYTE *)"fac_" , &AM.facnum, NOAUTO);
01271     GetName(AC.varnames, (UBYTE *)"invfac_" , &AM.invfacnum, NOAUTO);
01272     GetName(AC.varnames, (UBYTE *)"sum_" , &AM.sumnum, NOAUTO);
01273     GetName(AC.varnames, (UBYTE *)"sump_" , &AM.sumpnum, NOAUTO);
01274     GetName(AC.varnames, (UBYTE *)"term_" , &AM.termfunnum, NOAUTO);
01275     GetName(AC.varnames, (UBYTE *)"match_" , &AM.matchfunnum, NOAUTO);
01276     GetName(AC.varnames, (UBYTE *)"count_" , &AM.countfunnum, NOAUTO);
01277     AM.termfunnum += FUNCTION;
01278     AM.matchfunnum += FUNCTION;
01279     AM.countfunnum += FUNCTION;
01280

```

```

01281     AC.ThreadStats = AM.gThreadStats = AM.ggThreadStats = 1;
01282     AC.FinalStats = AM.gFinalStats = AM.ggFinalStats = 1;
01283     AC.StatsFlag = AM.gStatsFlag = AM.ggStatsFlag = 1;
01284     AC.ThreadsFlag = AM.gThreadsFlag = AM.ggThreadsFlag = 1;
01285     AC.ThreadBalancing = AM.gThreadBalancing = AM.ggThreadBalancing = 1;
01286     AC.ThreadSortFileSynch = AM.gThreadSortFileSynch = AM.ggThreadSortFileSynch = 0;
01287     AC.ProcessStats = AM.gProcessStats = AM.ggProcessStats = 1;
01288     AC.OldParallelStats = AM.gOldParallelStats = AM.ggOldParallelStats = 0;
01289     AC.OldFactArgFlag = AM.gOldFactArgFlag = AM.ggOldFactArgFlag = NEWFACTARG;
01290     AC.OldGCDflag = AM.gOldGCDflag = AM.ggOldGCDflag = 1;
01291     AC.WTimeStatsFlag = AM.gWTimeStatsFlag = AM.ggWTimeStatsFlag = 0;
01292     AM.gNumDollars = AP.DollarList.num;
01293     AC.SizeCommuteInSet = AM.gSizeCommuteInSet = 0;
01294     #ifdef WITHFLOAT
01295     AC.MaxWeight = AM.gMaxWeight = AM.ggMaxWeight = MAXWEIGHT;
01296     AC.DefaultPrecision = AM.gDefaultPrecision = AM.ggDefaultPrecision = DEFAULTPRECISION;
01297     #endif
01298     AC.CommuteInSet = 0;
01299
01300     AM.PrintTotalSize = 0;
01301
01302     AO.NoSpacesInNumbers = AM.gNoSpacesInNumbers = AM.ggNoSpacesInNumbers = 0;
01303     AO.IndentSpace = AM.gIndentSpace = AM.ggIndentSpace = INDENTSPACE;
01304     AO.BlockSpaces = 0;
01305     AO.OptimizationLevel = 0;
01306     PUTZERO(AS.MaxExprSize);
01307     PUTZERO(AC.StoreFileSize);
01308
01309     #ifdef WITHPTHREADS
01310     AC.inputnumbers = 0;
01311     AC.pfirstnum = 0;
01312     AC.numppfirstnum = AC.sizeppfirstnum = 0;
01313     #endif
01314     AC.MemDebugFlag = 1;
01315
01316     #ifdef WITHEXTERNALCHANNEL
01317     AX.currentExternalChannel=0;
01318     AX.killSignal=SIGKILL;
01319     AX.killWholeGroup=1;
01320     AX.daemonize=1;
01321     AX.currentPrompt=0;
01322     AX.timeout=1000; /*One second to initialize preset channels*/
01323     AX.shellname=strDup1((UBYTE *)"/bin/sh -c","external channel shellname");
01324     AX.stdername=strDup1((UBYTE *)"/dev/null","external channel stderrname");
01325     #endif
01326 }
01327
01328 /*
01329     #] StartVariables :
01330     #[ StartMore :
01331 */
01332
01333 void StartMore(void)
01334 {
01335     #ifdef WITHEXTERNALCHANNEL
01336     /*If env.variable "FORM_PIPES" is defined, we have to initialize
01337     corresponding pre-set external channels, see file extcmd.c.*/
01338     /*This line must be after all setup settings: in future, timeout
01339     could be changed at setup.*/
01340     if(AX.timeout>=0)/*if AX.timeout<0, this was done by cmdline option -pipe*/
01341         initPresetExternalChannels((UBYTE*)getenv("FORM_PIPES"),AX.timeout);
01342     #endif
01343
01344     #ifdef WITHMPI
01345     /*
01346     Define preprocessor variable PARALLELTASK_ as a process number, 0 is the master
01347     Define preprocessor variable NPARALLELTASKS_ as a total number of processes
01348     */
01349     {
01350         UBYTE buf[32];
01351         snprintf((char*)buf,32,"%d",PF.me);
01352         PutPreVar((UBYTE *) "PARALLELTASK_",buf,0,0);
01353         snprintf((char*)buf,32,"%d",PF.numtasks);
01354         PutPreVar((UBYTE *) "NPARALLELTASKS_",buf,0,0);
01355     }
01356     #else
01357     PutPreVar((UBYTE *) "PARALLELTASK_",(UBYTE *) "0",0,0);
01358     PutPreVar((UBYTE *) "NPARALLELTASKS_",(UBYTE *) "1",0,0);
01359     #endif
01360
01361     PutPreVar((UBYTE *) "NAME_",AM.InputFileName ? AM.InputFileName : (UBYTE *) "STDIN",0,0);
01362 }
01363
01364 /*
01365     #] StartMore :
01366     #[ IniVars :
01367

```

```

01368         This routine initializes the parameters that may change during the run.
01369     */
01370
01371 void IniVars(void)
01372 {
01373     #ifdef WITHPTHREADS
01374         GETIDENTITY
01375     #else
01376         WORD *t;
01377     #endif
01378     WORD *fi, i, one = 1;
01379     CBUF *C = cbuf+AC.cbunum;
01380
01381     #ifdef WITHPTHREADS
01382         UBYTE buf[32];
01383         snprintf((char*)buf, 32, "%d", AM.totalnumberofthreads);
01384         PutPreVar((UBYTE *) "NTHREADS_", buf, 0, 1);
01385     #else
01386         PutPreVar((UBYTE *) "NTHREADS_", (UBYTE *) "1", 0, 1);
01387     #endif
01388
01389     AC.ShortStats = 0;
01390     AC.WarnFlag = 1;
01391     AR.SortType = AC.SortType = AC.lSortType = AM.gSortType;
01392     AC.OutputMode = 72;
01393     AC.OutputSpaces = NORMALFORMAT;
01394     AR.Eside = 0;
01395     AC.DumNum = 0;
01396     AC.ncmod = AM.gncmod = 0;
01397     AC.modmode = AM.gmodmode = 0;
01398     AC.npowmod = AM.gnpowmod = 0;
01399     AC.halfmod = 0; AC.nhalfmod = 0;
01400     AC.modinverses = 0;
01401     AC.lPolyFun = AM.gPolyFun = 0;
01402     AC.lPolyFunInv = AM.gPolyFunInv = 0;
01403     AC.lPolyFunType = AM.gPolyFunType = 0;
01404     AC.lPolyFunExp = AM.gPolyFunExp = 0;
01405     AC.lPolyFunVar = AM.gPolyFunVar = 0;
01406     AC.lPolyFunPow = AM.gPolyFunPow = 0;
01407     #ifdef WITHFLINT
01408         AC.FlintPolyFlag = 1;
01409     #else
01410         AC.FlintPolyFlag = 0;
01411     #endif
01412     AC.DirtPow = 0;
01413     AC.lDefDim = AM.gDefDim = 4;
01414     AC.lDefDim4 = AM.gDefDim4 = 0;
01415     AC.lUnitTrace = AM.gUnitTrace = 4;
01416     AC.NamesFlag = AM.gNamesFlag = 0;
01417     AC.CodesFlag = AM.gCodesFlag = 0;
01418     /* Printing a backtrace on crash is on by default for both normal and debug
01419        modes if FORM has been compiled with backtrace support. */
01420     #ifdef ENABLE_BACKTRACE
01421         AC.PrintBacktraceFlag = 1;
01422     #else
01423         AC.PrintBacktraceFlag = 0;
01424     #endif
01425     /* Human-readable statistics are off by default */
01426     AC.HumanStatsFlag = 0;
01427     AC.extrasymbols = AM.gextrasymbols = AM.ggextrasymbols = 0;
01428     AC.extrasym = (UBYTE *) Malloc1(2*sizeof(UBYTE), "extrasym");
01429     AM.gextrasym = (UBYTE *) Malloc1(2*sizeof(UBYTE), "extrasym");
01430     AM.ggextrasym = (UBYTE *) Malloc1(2*sizeof(UBYTE), "extrasym");
01431     AC.extrasym[0] = AM.gextrasym[0] = AM.ggextrasym[0] = 'Z';
01432     AC.extrasym[1] = AM.gextrasym[1] = AM.ggextrasym[1] = 0;
01433     AC.TokensWriteFlag = AM.gTokensWriteFlag = 0;
01434     AC.SetupFlag = 0;
01435     AC.LineLength = AM.gLineLength = 79;
01436     AC.NwildC = 0;
01437     AC.OutputMode = 0;
01438     AM.gOutputMode = 0;
01439     AC.OutputSpaces = NORMALFORMAT;
01440     AM.gOutputSpaces = NORMALFORMAT;
01441     AC.OutNumberType = RATIONALMODE;
01442     AM.gOutNumberType = RATIONALMODE;
01443     #ifdef WITHZLIB
01444         AR.zipCompress = GZIPDEFAULT;
01445         AR.FoStage4[0].ziobuffer = 0;
01446         AR.FoStage4[1].ziobuffer = 0;
01447     #ifdef WITHZSTD
01448         /* Zstd compression is on by default, if we have compiled with it */
01449         ZWRAP_useZSTDcompression(1);
01450     #endif
01451     #endif
01452     AR.BracketOn = 0;
01453     AC.bracketindexflag = 0;
01454     AT.bracketindexflag = 0;

```

```

01455     AT.bracketinfo = 0;
01456     AO.IsBracket = 0;
01457     AM.gfunpowers = AC.funpowers = COMFUNPOWERS;
01458     AC.parallelfldflag = AM.gparallelfldflag;
01459     AC.properorderflag = AM.gproperorderflag = PROPERORDERFLAG;
01460     AC.ProcessBucketSize = AC.mProcessBucketSize = AM.gProcessBucketSize;
01461     AC.ThreadBucketSize = AM.gThreadBucketSize;
01462     AC.ShortStatsMax = 0;
01463     AM.gShortStatsMax = 0;
01464     AM.ggShortStatsMax = 0;
01465
01466     GlobalSymbols      = NumSymbols;
01467     GlobalIndices      = NumIndices;
01468     GlobalVectors      = NumVectors;
01469     GlobalFunctions    = NumFunctions;
01470     GlobalSets         = NumSets;
01471     GlobalSetElements  = NumSetElements;
01472     AC.modpowers = (UWORD *)0;
01473
01474     i = AM.OffsetIndex;
01475     fi = AC.FixIndices;
01476     if ( i > 0 ) do { *fi++ = one; } while ( --i >= 0 );
01477     AR.sLevel = -1;
01478     AM.Ordering[0] = 5;
01479     AM.Ordering[1] = 6;
01480     AM.Ordering[2] = 7;
01481     AM.Ordering[3] = 0;
01482     AM.Ordering[4] = 1;
01483     AM.Ordering[5] = 2;
01484     AM.Ordering[6] = 3;
01485     AM.Ordering[7] = 4;
01486     for ( i = 8; i < 15; i++ ) AM.Ordering[i] = i;
01487     AM.gUniTrace[0] =
01488     AC.lUniTrace[0] = SNUMBER;
01489     AM.gUniTrace[1] =
01490     AC.lUniTrace[1] =
01491     AM.gUniTrace[2] =
01492     AC.lUniTrace[2] = 4;
01493     AM.gUniTrace[3] =
01494     AC.lUniTrace[3] = 1;
01495 #ifdef WITHPTHREADS
01496     AS.Balancing = 0;
01497 #else
01498     AT.MinVecArg[0] = 7+ARGHEAD;
01499     AT.MinVecArg[ARGHEAD] = 7;
01500     AT.MinVecArg[1+ARGHEAD] = INDEX;
01501     AT.MinVecArg[2+ARGHEAD] = 3;
01502     AT.MinVecArg[3+ARGHEAD] = 0;
01503     AT.MinVecArg[4+ARGHEAD] = 1;
01504     AT.MinVecArg[5+ARGHEAD] = 1;
01505     AT.MinVecArg[6+ARGHEAD] = -3;
01506     t = AT.FunArg;
01507     *t++ = 4+ARGHEAD+FUNHEAD;
01508     for ( i = 1; i < ARGHEAD; i++ ) *t++ = 0;
01509     *t++ = 4+FUNHEAD;
01510     *t++ = 0;
01511     *t++ = FUNHEAD;
01512     for ( i = 2; i < FUNHEAD; i++ ) *t++ = 0;
01513     *t++ = 1; *t++ = 1; *t++ = 3;
01514
01515 #ifdef WITHMPI
01516     AS.printflag = 0;
01517 #endif
01518
01519     AT.comsym[0] = 8;
01520     AT.comsym[1] = SYMBOL;
01521     AT.comsym[2] = 4;
01522     AT.comsym[3] = 0;
01523     AT.comsym[4] = 1;
01524     AT.comsym[5] = 1;
01525     AT.comsym[6] = 1;
01526     AT.comsym[7] = 3;
01527     AT.comnum[0] = 4;
01528     AT.comnum[1] = 1;
01529     AT.comnum[2] = 1;
01530     AT.comnum[3] = 3;
01531     AT.comfun[0] = FUNHEAD+4;
01532     AT.comfun[1] = FUNCTION;
01533     AT.comfun[2] = FUNHEAD;
01534     AT.comfun[3] = 0;
01535 #if FUNHEAD == 4
01536     AT.comfun[4] = 0;
01537 #endif
01538     AT.comfun[FUNHEAD+1] = 1;
01539     AT.comfun[FUNHEAD+2] = 1;
01540     AT.comfun[FUNHEAD+3] = 3;
01541     AT.comind[0] = 7;

```



```

01542     AT.comind[1] = INDEX;
01543     AT.comind[2] = 3;
01544     AT.comind[3] = 0;
01545     AT.comind[4] = 1;
01546     AT.comind[5] = 1;
01547     AT.comind[6] = 3;
01548     AT.locwildvalue[0] = SUBEXPRESSION;
01549     AT.locwildvalue[1] = SUBEXPSIZE;
01550     for ( i = 2; i < SUBEXPSIZE; i++ ) AT.locwildvalue[i] = 0;
01551     AT.mulpat[0] = TYPEMULT;
01552     AT.mulpat[1] = SUBEXPSIZE+3;
01553     AT.mulpat[2] = 0;
01554     AT.mulpat[3] = SUBEXPRESSION;
01555     AT.mulpat[4] = SUBEXPSIZE;
01556     AT.mulpat[5] = 0;
01557     AT.mulpat[6] = 1;
01558     for ( i = 7; i < SUBEXPSIZE+5; i++ ) AT.mulpat[i] = 0;
01559     AT.proexp[0] = SUBEXPSIZE+4;
01560     AT.proexp[1] = EXPRESSION;
01561     AT.proexp[2] = SUBEXPSIZE;
01562     AT.proexp[3] = -1;
01563     AT.proexp[4] = 1;
01564     for ( i = 5; i < SUBEXPSIZE+1; i++ ) AT.proexp[i] = 0;
01565     AT.proexp[SUBEXPSIZE+1] = 1;
01566     AT.proexp[SUBEXPSIZE+2] = 1;
01567     AT.proexp[SUBEXPSIZE+3] = 3;
01568     AT.proexp[SUBEXPSIZE+4] = 0;
01569     AT.dummysubexp[0] = SUBEXPRESSION;
01570     AT.dummysubexp[1] = SUBEXPSIZE+4;
01571     for ( i = 2; i < SUBEXPSIZE; i++ ) AT.dummysubexp[i] = 0;
01572     AT.dummysubexp[SUBEXPSIZE] = WILDDUMMY;
01573     AT.dummysubexp[SUBEXPSIZE+1] = 4;
01574     AT.dummysubexp[SUBEXPSIZE+2] = 0;
01575     AT.dummysubexp[SUBEXPSIZE+3] = 0;
01576
01577     AT.inprimelist = -1;
01578     AT.sizeprimelist = 0;
01579     AT.primelist = 0;
01580     AT.LeaveNegative = 0;
01581     AT.TrimPower = 0;
01582     AN.SplitScratch = 0;
01583     AN.SplitScratchSize = AN.InScratch = 0;
01584     AN.SplitScratch1 = 0;
01585     AN.SplitScratchSize1 = AN.InScratch1 = 0;
01586     AN.idfunctionflag = 0;
01587 #endif
01588     AO.OutputLine = AO.OutFill = BufferForOutput;
01589     AO.FactorMode = 0;
01590     C->Pointer = C->Buffer;
01591
01592     AP.PreOut = 0;
01593     AP.ComChar = AP.cComChar;
01594     AC.cbufnum = AM.rbufnum;      /* Select the default compiler buffer */
01595     AC.HideLevel = 0;
01596     AP.PreAssignFlag = 0;
01597 }
01598
01599 /*
01600     #] IniVars :
01601     #[ Signal handlers :
01602 */
01603 /*[28apr2004 mt]:*/
01604 #ifdef TRAP_SIGNALS
01605
01606 static int exitInProgress = 0;
01607 static int trappedTerminate = 0;
01608
01609 /**INTSIGHANDLER : some systems require a signal handler to return an integer,
01610    so define the macro INTSIGHANDLER if compiler fails:*/
01611 #ifndef INTSIGHANDLER
01612 static int onErrSig(int i)
01613 #else
01614 static void onErrSig(int i)
01615 #endif
01616 {
01617     if (exitInProgress){
01618         signal(i, SIG_DFL); /* Use default behaviour*/
01619         raise (i); /*reproduce trapped signal*/
01620 #ifdef INTSIGHANDLER
01621         return(i);
01622 #else
01623         return;
01624 #endif
01625     }
01626     trappedTerminate = 1;
01627     /*[13jul2005 mt]*/ /*TerminateImpl(-1) on signal is here:*/
01628     Terminate(-1);

```

```

01629 }
01630
01631 #ifdef INTSIGHANDLER
01632 static void setNewSig(int i, int (*handler)(int))
01633 #else
01634 static void setNewSig(int i, void (*handler)(int))
01635 #endif
01636 {
01637     if(! (i<NSIG) )/* Invalid signal -- see comments in the file */
01638         return;
01639     if ( signal(i,SIG_IGN) !=SIG_IGN)
01640         /* if compiler fails here, try to define INTSIGHANDLER:*/
01641         signal(i,handler);
01642 }
01643
01644 void setSignalHandlers(void)
01645 {
01646     /* Reset various unrecoverable error signals:*/
01647     setNewSig(SIGSEGV,onErrSig);
01648     setNewSig(SIGFPE,onErrSig);
01649     setNewSig(SIGILL,onErrSig);
01650     setNewSig(SIGEMT,onErrSig);
01651     setNewSig(SIGSYS,onErrSig);
01652     setNewSig(SIGPIPE,onErrSig);
01653     setNewSig(SIGLOST,onErrSig);
01654     setNewSig(SIGXCPU,onErrSig);
01655     setNewSig(SIGXFSZ,onErrSig);
01656
01657     /* Reset interrupt signals:*/
01658     setNewSig(SIGTERM,onErrSig);
01659     setNewSig(SIGINT,onErrSig);
01660     setNewSig(SIGQUIT,onErrSig);
01661     setNewSig(SIGHUP,onErrSig);
01662     setNewSig(SIGALRM,onErrSig);
01663     setNewSig(SIGVTALRM,onErrSig);
01664     /* setNewSig(SIGPROF,onErrSig); */ /* Why did Tentukov forbid profilers?? */
01665 }
01666
01667 #endif
01668 /*:[28apr2004 mt]*/
01669 /*
01670     #] Signal handlers :
01671     #[ main :
01672 */
01673
01674 #ifdef WITHPTHREADS
01675 ALLPRIVATES *ABdummy[10];
01676 #endif
01677
01678 int main(int argc, char **argv)
01679 {
01680     int retval;
01681     bzero((void *)(&A),sizeof(A)); /* make sure A is initialized at zero */
01682     iniTools();
01683 #ifdef TRAP_SIGNALS
01684     setSignalHandlers();
01685 #endif
01686 #ifdef WINDOWS
01687     _setmode(_fileno(stdout),O_BINARY);
01688 #endif
01689
01690 #ifdef WITHPTHREADS
01691     AB = ABdummy;
01692     StartHandleLock();
01693     BeginIdentities();
01694 #else
01695     AM.SumTime = TimeCPU(0);
01696     TimeWallClock(0);
01697 #endif
01698
01699 #ifdef WITHMPI
01700     if ( PF_Init(&argc,&argv) ) exit(-1);
01701 #endif
01702
01703     StartFiles();
01704     StartVariables();
01705 #ifdef WITHMPI
01706     /*
01707     * Here MesPrint() is ready. We turn on AS.printflag to print possible
01708     * errors occurring on slaves in the initialization. With AS.printflag = -1
01709     * MesPrint() does not use the synchronized output. This may lead broken
01710     * texts in the output somewhat, but it is safer to implement in this way
01711     * for the situation in which some of MesPrint() calls use MLOCK()-MUNLOCK()
01712     * and some do not. In future if we set AS.printflag = 1 and modify the
01713     * source code such that all MesPrint() calls are sandwiched by MLOCK()-
01714     * MUNLOCK(), we need also to modify the code for the master to catch
01715     * messages corresponding to MUNLOCK() calls at some point.

```

```

01716      *
01717      * AS.printflag will be set to 0 in IniVars() to prevent slaves from
01718      * printing redundant errors in the preprocessor and compiler (e.g., syntax
01719      * errors).
01720      */
01721      AS.printflag = -1;
01722 #endif
01723
01724      if ( ( retval = DoTail(argc, (UBYTE **)argv) ) != 0 ) {
01725          if ( retval > 0 ) Terminate(0);
01726          else Terminate(-1);
01727      }
01728      if ( DoSetups() ) Terminate(-2);
01729 #ifdef WITHMPI
01730      /* It is messy if all errors in OpenInput() on slaves are printed. */
01731      AS.printflag = 0;
01732 #endif
01733      if ( OpenInput() ) Terminate(-3);
01734 #ifdef WITHMPI
01735      AS.printflag = -1;
01736 #endif
01737      if ( TryEnvironment() ) Terminate(-2);
01738      if ( TryFileSetups() ) Terminate(-2);
01739      if ( MakeSetupAllocs() ) Terminate(-2);
01740      StartMore();
01741      InitRecovery();
01742      CheckRecoveryFile();
01743      if ( AM.totalnumberofthreads == 0 ) AM.totalnumberofthreads = 1;
01744      AS.MultiThreaded = 0;
01745 #ifdef WITHPTHREADS
01746      if ( AM.totalnumberofthreads > 1 ) AS.MultiThreaded = 1;
01747      ReserveTempFiles(1);
01748      StartAllThreads(AM.totalnumberofthreads);
01749      IniFbufs();
01750 #else
01751      ReserveTempFiles(0);
01752      IniFbuffer(AT.fbufnum);
01753 #endif
01754      if ( !AM.FromStdin ) PrintHeader(1);
01755      IniVars();
01756      Globalize(1);
01757 #ifdef WITH_ALARM
01758      if ( AM.TimeLimit > 0 ) alarm(AM.TimeLimit);
01759 #endif
01760 #ifdef WITHFLINT
01761      flint_check_version();
01762 #endif
01763      TimeCPU(0);
01764      TimeChildren(0);
01765      TimeWallClock(0);
01766      PreProcessor();
01767      Terminate(0);
01768      return(0);
01769 }
01770 /*
01771      #] main :
01772      #[ CleanUp :
01773
01774      if par < 0 we have to keep the storage file.
01775      when par > 0 we ran into a .clear statement.
01776      In that case we keep the zero level input and the log file.
01777 */
01778 void CleanUp(WORD par)
01779 {
01780     GETIDENTITY
01781     int i;
01782
01783     if ( FG.fname ) {
01784 #ifdef WITHPTHREADS
01785         if ( B ) {
01786 #endif
01787             CleanUpSort(0);
01788             for ( i = 0; i < 3; i++ ) {
01789                 if ( AR.Fscr[i].handle >= 0 ) {
01790                     if ( AR.Fscr[i].name ) {
01791 /*
01792                         If there are more threads referring to the same file
01793                         only the one with the name is the owner of the file.
01794 */
01795                         CloseFile(AR.Fscr[i].handle);
01796                         remove(AR.Fscr[i].name);
01797                     }
01798                     AR.Fscr[i].handle = - 1;
01799                     AR.Fscr[i].POfill = 0;
01800                 }
01801             }
01802         }

```

```

01803     }
01804 #ifdef WITHPTHREADS
01805     }
01806 #endif
01807     if ( par > 0 ) {
01808 /*
01809     Close all input levels above the lowest?
01810 */
01811     }
01812     if ( AC.StoreHandle >= 0 && par <= 0 ) {
01813 #ifdef TRAP SIGNALS
01814         if ( trappedTerminate ) { /* We don't throw .str if it has contents */
01815             POSITION pos;
01816             PUTZERO(pos);
01817             SeekFile(AC.StoreHandle,&pos,SEEK_END);
01818             if ( ISNOTZEROPOS(pos) ) {
01819                 CloseFile(AC.StoreHandle);
01820                 goto dontremove;
01821             }
01822         }
01823         CloseFile(AC.StoreHandle);
01824 #ifdef WITHPTHREADS
01825         if ( B )
01826 #endif
01827         if ( par >= 0 || AR.StoreData.Handle < 0 || AM.ClearStore ) {
01828             remove(FG.fname);
01829         }
01830 dontremove:;
01831 #else
01832         CloseFile(AC.StoreHandle);
01833 #ifdef WITHPTHREADS
01834         if ( B )
01835 #endif
01836         if ( par >= 0 || AR.StoreData.Handle < 0 || AM.ClearStore > 0 ) {
01837             remove(FG.fname);
01838         }
01839 #endif
01840     }
01841 }
01842 ClearSpectators(CLEARMODULE);
01843 /*
01844 Remove recovery file on exit if everything went well
01845 */
01846 if ( par == 0 ) {
01847     DeleteRecoveryFile();
01848 }
01849 /*
01850 Now the final message concerning the total time
01851 */
01852 if ( AC.LogHandle >= 0 && par <= 0 ) {
01853     WORD lh = AC.LogHandle;
01854     AC.LogHandle = -1;
01855 #ifdef WITHMPI
01856     if ( PF.me == MASTER ) /* Only the master opened the real file. */
01857 #endif
01858     CloseFile(lh);
01859 }
01860 }
01861 /*
01862 #] CleanUp :
01863 #[ TerminateImpl :
01864 */
01865 static int firstterminate = 1;
01866 void TerminateImpl(int errorcode, const char* file, int line, const char* function)
01867 {
01868     if ( errorcode && firstterminate ) {
01869         firstterminate = 0;
01870         MLOCK(ErrorMessageLock);
01871 #ifdef WITHPTHREADS
01872         MesPrint("Program terminating in thread %w at %");
01873 #elif defined(WITHMPI)
01874         MesPrint("Program terminating in process %w at %");
01875 #else
01876         MesPrint("Program terminating at %");
01877 #endif
01878         MesPrint("Terminate called from %s:%d (%s)", file, line, function);
01879         if ( AC.PrintBacktraceFlag ) {
01880             void *stack[64];
01881             int stacksize, stop = 0;
01882             stacksize = backtrace(stack, sizeof(stack)/sizeof(stack[0]));
01883         }
01884     }

```

```

01890         /* First check whether eu-addr2line is available */
01891         if ( !system("command -v eu-addr2line > /dev/null 2>&1") ) {
01892             MesPrint("Backtrace:");
01893             for (int i = 0; i < stacksize && !stop; i++) {
01894                 FILE *fp;
01895                 char cmd[512];
01896                 // Leave an initial space
01897                 cmd[0] = ' ';
01898                 MesPrint("###%2d:", i);
01899                 snprintf(cmd+1, sizeof(cmd)-1, "eu-addr2line -s --pretty-print -f -i '%p'
--pid=%d\n", stack[i], getpid());
01900                 fp = popen(cmd+1, "r");
01901                 while ( fgets(cmd+1, sizeof(cmd)-1, fp) != NULL ) {
01902                     MesPrint("%s", cmd);
01903                     /* Don't show functions lower than "main" (or thread equivalent) */
01904                     if ( strstr(cmd, " main ") || strstr(cmd, " RunThread ") || strstr(cmd, "
RunSortBot ") ) {
01905                         stop = 1;
01906                     }
01907                 }
01908                 pclose(fp);
01909             }
01910         }
01911 #ifdef LINUX
01912         else if ( !system("command -v addr2line > /dev/null 2>&1") ) {
01913             /* Get the executable path. */
01914             char exe_path[PATH_MAX];
01915             {
01916                 ssize_t len = readlink("/proc/self/exe", exe_path, sizeof(exe_path) - 1);
01917                 if ( len != -1 ) {
01918                     exe_path[len] = '\0';
01919                 }
01920                 else {
01921                     goto backtrace_fallback;
01922                 }
01923             }
01924             /* Assume PIE binary and get the base address. */
01925             uintptr_t base_address = 0;
01926             {
01927                 char line[256];
01928                 FILE *maps = fopen("/proc/self/maps", "r");
01929                 if ( !maps ) {
01930                     goto backtrace_fallback;
01931                 }
01932                 /* See the format used by nommu_region_show() in fs/proc/nommu.c of the Linux
source. */
01933                 if ( fgets(line, sizeof(line), maps) ) {
01934                     sscanf(line, "%* SCNxPTR -", &base_address);
01935                 }
01936                 else {
01937                     fclose(maps);
01938                     goto backtrace_fallback;
01939                 }
01940                 fclose(maps);
01941             }
01942             char **strings;
01943             strings = backtrace_symbols(stack, stacksize);
01944             MesPrint("Backtrace:");
01945             for ( int i = 0; i < stacksize && !stop; i++ ) {
01946                 FILE *fp;
01947                 char cmd[PATH_MAX + 512];
01948                 // Leave an initial space
01949                 cmd[0] = ' ';
01950                 uintptr_t addr = (uintptr_t)stack[i] - base_address;
01951                 MesPrint("###%2d:", i);
01952                 snprintf(cmd+1, sizeof(cmd)-1, "addr2line -e \"%s\" -i -p -s -f -C 0x% PRIxPTR,
exe_path, addr);
01953                 fp = popen(cmd+1, "r");
01954                 while ( fgets(cmd+1, sizeof(cmd)-1, fp) != NULL ) {
01955                     MesPrint("%s", cmd);
01956                     /* Don't show functions lower than "main" */
01957                     if ( strstr(cmd, " main ") || strstr(cmd, " RunThread ") || strstr(cmd, "
RunSortBot ") ) {
01958                         stop = 1;
01959                     }
01960                 }
01961                 pclose(fp);
01962             }
01963             free(strings);
01964         }
01965 #endif
01966         else {
01967             /* eu-addr2line not found */
01968 #ifdef LINUX
01969             backtrace_fallback: ;
01970 #endif
01971             char **strings;

```

```

01972         strings = backtrace_symbols(stack, stacksize);
01973         MesPrint("Backtrace:");
01974         for ( int i = 0; i < stacksize && !stop; i++ ) {
01975             char *p = strings[i];
01976             while ( *p && *p != ' (' ) p++;
01977             MesPrint("%%2d: %s\n", i, p);
01978             /* Don't show functions lower than "main" (or thread equivalent) */
01979             if ( strstr(p, "(main)") || strstr(p, "(RunThread)") || strstr(p, "(RunSortBot)")
01980         ) {
01981             stop = 1;
01982         }
01983 #ifdef LINUX
01984         MesPrint("Please install addr2line or eu-addr2line for readable stack information.");
01985 #else
01986         MesPrint("Please install eu-addr2line for readable stack information.");
01987 #endif
01988         free(strings);
01989     }
01990 #else
01991         MesPrint("FORM compiled without backtrace support.");
01992 #endif
01993     } /* if ( AC.PrintBacktraceFlag ) { */
01994
01995     MUNLOCK(ErrorMessageLock);
01996
01997     Crash();
01998 }
01999 #ifdef TRAP_SIGNALS
02000     exitInProgress=1;
02001 #endif
02002 #ifdef WITHEXTERNALCHANNEL
02003 /*
02004     This function can be called from the error handler, so it is better to
02005     clean up all started processes before any activity:
02006 */
02007     closeAllExternalChannels();
02008     AX.currentExternalChannel=0;
02009     /*[08may2006 mt]:*/
02010     AX.killSignal=SIGKILL;
02011     AX.killWholeGroup=1;
02012     AX.daemonize=1;
02013     /*:[08may2006 mt]*/
02014     if(AX.currentPrompt){
02015         M_free(AX.currentPrompt,"external channel prompt");
02016         AX.currentPrompt=0;
02017     }
02018     /*[08may2006 mt]:*/
02019     if(AX.shellname){
02020         M_free(AX.shellname,"external channel shellname");
02021         AX.shellname=0;
02022     }
02023     if(AX.stdername){
02024         M_free(AX.stdername,"external channel stderrname");
02025         AX.stdername=0;
02026     }
02027     /*:[08may2006 mt]*/
02028 #endif
02029 #ifdef WITHPTHREADS
02030     if ( !WhoAmI() && !errorcode ) {
02031         TerminateAllThreads();
02032     }
02033 #endif
02034     if ( AC.FinalStats ) {
02035         if ( AM.PrintTotalSize ) {
02036             MesPrint("Max. space for expressions: %19p bytes",&(AS.MaxExprSize));
02037         }
02038         PrintRunningTime();
02039     }
02040 #ifdef WITHMPI
02041     if ( AM.HoldFlag && PF.me == MASTER ) {
02042         WriteFile(AM.Stdout,(UBYTE *)("Hit any key "),12);
02043         PF_FlushStdOutBuffer();
02044         getchar();
02045     }
02046 #else
02047     if ( AM.HoldFlag ) {
02048         WriteFile(AM.Stdout,(UBYTE *)("Hit any key "),12);
02049         getchar();
02050     }
02051 #endif
02052 #ifdef WITHMPI
02053     PF_Terminate(errorcode);
02054 #endif
02055 /*
02056     We are about to terminate the program. If we are using flint, call the cleanup function.
02057     This keeps valgrind happy.

```

```

02058 */
02059 #ifdef WITHFLINT
02060     flint_final_cleanup_master();
02061 #endif
02062     CleanUp(errorcode);
02063     M_print();
02064 #ifdef VMS
02065     P_term(errorcode? 0: 1);
02066 #else
02067     P_term(errorcode);
02068 #endif
02069 }
02070
02071 /*
02072     #] TerminateImpl :
02073     #[ PrintDeprecation :
02074 */
02075
02082 void PrintDeprecation(const char *feature, const char *issue) {
02083 #ifdef WITHMPI
02084     if ( PF.me != MASTER ) return;
02085 #endif
02086     if ( AM.IgnoreDeprecation ) return;
02087
02088     UBYTE *e = (UBYTE *)getenv("FORM_IGNORE_DEPRECATION");
02089     if ( e && e[0] && StrCmp(e, (UBYTE *)"0") && StrICmp(e, (UBYTE *)"false") && StrICmp(e, (UBYTE
*)"no") ) return;
02090
02091     MesPrint("DeprecationWarning: We are considering deprecating %s.", feature);
02092     MesPrint("If you want this support to continue, leave a comment at:");
02093     MesPrint("");
02094     MesPrint("    https://github.com/vermaseren/form/%s", issue);
02095     MesPrint("");
02096     MesPrint("Otherwise, it will be discontinued in the future.");
02097     MesPrint("To suppress this warning, use the -ignore-deprecation command line option or");
02098     MesPrint("set the environment variable FORM_IGNORE_DEPRECATION=1.");
02099 }
02100
02101 /*
02102     #] PrintDeprecation :
02103     #[ PrintRunningTime :
02104 */
02105
02106 void PrintRunningTime(void)
02107 {
02108 #if (defined(WITHPTHREADS) && (defined(WITHPOSIXCLOCK) || defined(WINDOWS))) || defined(WITHMPI)
02109     LONG mastertime;
02110     LONG workertime;
02111     LONG wallclocktime;
02112     LONG totaltime;
02113 #if defined(WITHPTHREADS)
02114     if ( AB[0] != 0 ) {
02115         workertime = GetWorkerTimes();
02116     }
02117     else
02118         workertime = PF_GetSlaveTimes(); /* must be called on all processors */
02119 #endif
02120     mastertime = AM.SumTime + TimeCPU(1);
02121     wallclocktime = TimeWallClock(1);
02122     totaltime = mastertime+workertime;
02123     if ( !AM.silent ) {
02124         MesPrint(" %1.2i sec + %1.2i sec: %1.2i sec out of %1.2i sec",
02125             mastertime/1000, (WORD)((mastertime%1000)/10),
02126             workertime/1000, (WORD)((workertime%1000)/10),
02127             totaltime/1000, (WORD)((totaltime%1000)/10),
02128             wallclocktime/100, (WORD)(wallclocktime%100));
02129     }
02130 }
02131 #else
02132     LONG mastertime = AM.SumTime + TimeCPU(1);
02133     LONG wallclocktime = TimeWallClock(1);
02134     if ( !AM.silent ) {
02135         MesPrint(" %1.2i sec out of %1.2i sec",
02136             mastertime/1000, (WORD)((mastertime%1000)/10),
02137             wallclocktime/100, (WORD)(wallclocktime%100));
02138     }
02139 #endif
02140 }
02141
02142 /*
02143     #] PrintRunningTime :
02144     #[ GetRunningTime :
02145 */
02146
02147 LONG GetRunningTime(void)
02148 {
02149 #if defined(WITHPTHREADS) && (defined(WITHPOSIXCLOCK) || defined(WINDOWS))

```


```

02150     LONG mastertime;
02151     if ( AB[0] != 0 ) {
02152     /*
02153     #if ( defined(APPLE64) || defined(APPLE32) )
02154         mastertime = AM.SumTime + TimeCPU(1);
02155         return(mastertime);
02156     #else
02157     */
02158         LONG workertime = GetWorkerTimes();
02159         mastertime = AM.SumTime + TimeCPU(1);
02160         return(mastertime+workertime);
02161     /*
02162     #endif
02163     */
02164     }
02165     else {
02166         return(AM.SumTime + TimeCPU(1));
02167     }
02168     #elif defined(WITHMPI)
02169     LONG mastertime, t = 0;
02170     LONG workertime = PF_GetSlaveTimes(); /* must be called on all processors */
02171     if ( PF.me == MASTER ) {
02172         mastertime = AM.SumTime + TimeCPU(1);
02173         t = mastertime + workertime;
02174     }
02175     return PF_BroadcastNumber(t); /* must be called on all processors */
02176     #else
02177     return(AM.SumTime + TimeCPU(1));
02178     #endif
02179 }
02180
02181 /*
02182     #] GetRunningTime :
02183 */

```

4.137 store.c File Reference

#include "form3.h"
 Include dependency graph for store.c:

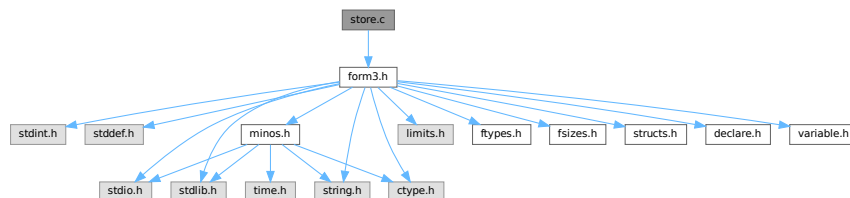

Macros

- #define [SAVEREVISION](#) 0x02

Functions

- void [OpenTemp](#) (void)
- void [SeekScratch](#) (FILEHANDLE *fi, POSITION *pos)
- void [SetEndScratch](#) (FILEHANDLE *f, POSITION *position)
- void [SetEndHScratch](#) (FILEHANDLE *f, POSITION *position)
- void [SetScratch](#) (FILEHANDLE *f, POSITION *position)
- int [RevertScratch](#) (void)
- int [ResetScratch](#) (void)

- int [ReadFromScratch](#) ([FILEHANDLE](#) *fi, [POSITION](#) *pos, [UBYTE](#) *buffer, [POSITION](#) *length)
- int [AddToScratch](#) ([FILEHANDLE](#) *fi, [POSITION](#) *pos, [UBYTE](#) *buffer, [POSITION](#) *length, int withflush)
- int [CoSave](#) ([UBYTE](#) *inp)
- int [CoLoad](#) ([UBYTE](#) *inp)
- int [DeleteStore](#) ([WORD](#) par)
- int [PutInStore](#) ([INDEXENTRY](#) *ind, [WORD](#) num)
- [WORD](#) [GetTerm](#) ([PHEAD](#) [WORD](#) *term)
- [WORD](#) [GetOneTerm](#) ([PHEAD](#) [WORD](#) *term, [FILEHANDLE](#) *fi, [POSITION](#) *pos, int par)
- [WORD](#) [GetMoreTerms](#) ([WORD](#) *term)
- int [GetMoreFromMem](#) ([WORD](#) *term, [WORD](#) **tpoin)
- [WORD](#) [GetFromStore](#) ([WORD](#) *to, [POSITION](#) *position, [RENUMBER](#) renumber, [WORD](#) *InCompState, [WORD](#) nexpr)
- void [DetVars](#) ([WORD](#) *term, [WORD](#) par)
- int [ToStorage](#) ([EXPRESSIONS](#) e, [POSITION](#) *length)
- [INDEXENTRY](#) * [NextFileIndex](#) ([POSITION](#) *indexpos)
- int [SetFileIndex](#) (void)
- int [VarStore](#) ([UBYTE](#) *s, [WORD](#) n, [WORD](#) name, [WORD](#) namesize)
- int [TermRenumber](#) ([WORD](#) *term, [RENUMBER](#) renumber, [WORD](#) nexpr)
- [WORD](#) [FindrNumber](#) ([WORD](#) n, [VARRENUM](#) *v)
- [INDEXENTRY](#) * [FindInIndex](#) ([WORD](#) expr, [FILEDATA](#) *f, [WORD](#) par, [WORD](#) mode)
- [RENUMBER](#) [GetTable](#) ([WORD](#) expr, [POSITION](#) *position, [WORD](#) mode)
- int [CopyExpression](#) ([FILEHANDLE](#) *from, [FILEHANDLE](#) *to)
- [LONG](#) [WriteStoreHeader](#) ([WORD](#) handle)
- int [ReadSaveHeader](#) (void)
- [LONG](#) [ReadSaveIndex](#) ([FILEINDEX](#) *fileind)
- [LONG](#) [ReadSaveVariables](#) ([UBYTE](#) *buffer, [UBYTE](#) *top, [LONG](#) *size, [LONG](#) *outsize, [INDEXENTRY](#) *ind, [LONG](#) *stage)
- [UBYTE](#) * [ReadSaveTerm32](#) ([UBYTE](#) *bin, [UBYTE](#) *binend, [UBYTE](#) **bout, [UBYTE](#) *boutend, [UBYTE](#) *top, int terminbuf)
- [LONG](#) [ReadSaveExpression](#) ([UBYTE](#) *buffer, [UBYTE](#) *top, [LONG](#) *size, [LONG](#) *outsize)

4.137.1 Detailed Description

Contains all functions that deal with store-files and the system independent save-files.

Definition in file [store.c](#).

4.137.2 Macro Definition Documentation

4.137.2.1 SAVEREVISION

```
#define SAVEREVISION 0x02
```

Definition at line 3953 of file [store.c](#).

4.137.3 Function Documentation

4.137.3.1 OpenTemp()

```
void OpenTemp (
    void )
```

Definition at line 48 of file [store.c](#).

4.137.3.2 SeekScratch()

```
void SeekScratch (
    FILEHANDLE * fi,
    POSITION * pos )
```

Definition at line 63 of file [store.c](#).

4.137.3.3 SetEndScratch()

```
void SetEndScratch (
    FILEHANDLE * f,
    POSITION * position )
```

Definition at line 74 of file [store.c](#).

4.137.3.4 SetEndHScratch()

```
void SetEndHScratch (
    FILEHANDLE * f,
    POSITION * position )
```

Definition at line 88 of file [store.c](#).

4.137.3.5 SetScratch()

```
void SetScratch (
    FILEHANDLE * f,
    POSITION * position )
```

Definition at line 114 of file [store.c](#).

4.137.3.6 RevertScratch()

```
int RevertScratch (
    void )
```

Definition at line 189 of file [store.c](#).

4.137.3.7 ResetScratch()

```
int ResetScratch (
    void )
```

Definition at line 234 of file [store.c](#).

4.137.3.8 ReadFromScratch()

```
int ReadFromScratch (
    FILEHANDLE * fi,
    POSITION * pos,
    UBYTE * buffer,
    POSITION * length )
```

Definition at line 272 of file [store.c](#).

4.137.3.9 AddToScratch()

```
int AddToScratch (
    FILEHANDLE * fi,
    POSITION * pos,
    UBYTE * buffer,
    POSITION * length,
    int withflush )
```

Definition at line 299 of file [store.c](#).

4.137.3.10 CoSave()

```
int CoSave (
    UBYTE * inp )
```

Definition at line 362 of file [store.c](#).

4.137.3.11 CoLoad()

```
int CoLoad (
    UBYTE * inp )
```

Definition at line 572 of file [store.c](#).

4.137.3.12 DeleteStore()

```
int DeleteStore (
    WORD par )
```

Definition at line 772 of file [store.c](#).

4.137.3.13 PutInStore()

```
int PutInStore (
    INDEXENTRY * ind,
    WORD num )
```

Definition at line 873 of file [store.c](#).

4.137.3.14 GetTerm()

```
WORD GetTerm (
    PHEAD WORD * term )
```

Definition at line 992 of file [store.c](#).

4.137.3.15 GetOneTerm()

```
WORD GetOneTerm (
    PHEAD WORD * term,
    FILEHANDLE * fi,
    POSITION * pos,
    int par )
```

Definition at line 1267 of file [store.c](#).

4.137.3.16 GetMoreTerms()

```
WORD GetMoreTerms (
    WORD * term )
```

Definition at line 1425 of file [store.c](#).

4.137.3.17 GetMoreFromMem()

```
int GetMoreFromMem (
    WORD * term,
    WORD ** tpoin )
```

Definition at line 1521 of file [store.c](#).

4.137.3.18 GetFromStore()

```
WORD GetFromStore (
    WORD * to,
    POSITION * position,
    RENUMBER renumber,
    WORD * InCompState,
    WORD nexpr )
```

Definition at line 1628 of file [store.c](#).

4.137.3.19 DetVars()

```
void DetVars (
    WORD * term,
    WORD par )
```

Definition at line 1829 of file [store.c](#).

4.137.3.20 ToStorage()

```
int ToStorage (
    EXPRESSIONS e,
    POSITION * length )
```

Definition at line 2016 of file [store.c](#).

4.137.3.21 NextFileIndex()

```
INDEXENTRY * NextFileIndex (
    POSITION * indexpos )
```

Definition at line 2257 of file [store.c](#).

4.137.3.22 SetFileIndex()

```
int SetFileIndex (
    void )
```

Reads the next file index and puts it into AR.StoreData.Index. TODO

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 2320 of file [store.c](#).

References [WriteStoreHeader\(\)](#).

Here is the call graph for this function:



4.137.3.23 VarStore()

```
int VarStore (
    UBYTE * s,
    WORD n,
    WORD name,
    WORD namesize )
```

Definition at line 2369 of file [store.c](#).

4.137.3.24 TermRenumber()

```
int TermRenumber (
    WORD * term,
    RENUMBER renumber,
    WORD nexpr )
```

!! WORD *memterm=term; static LONG ctrap=0; !!!


!! ctrap++; !!!

Definition at line 2427 of file [store.c](#).

References [ReNuMbEr::func](#), [ReNuMbEr::funnum](#), [ReNuMbEr::indi](#), [ReNuMbEr::indnum](#), [ReNuMbEr::symb](#), [ReNuMbEr::symnum](#), [TermRenumber\(\)](#), [ReNuMbEr::vecnum](#), and [ReNuMbEr::vect](#).

Referenced by [TermRenumber\(\)](#).

Here is the call graph for this function:

**4.137.3.25 FindrNumber()**

```
WORD FindrNumber (
    WORD n,
    VARRENUM * v )
```

Definition at line 2587 of file [store.c](#).

4.137.3.26 FindInIndex()

```
INDEXENTRY * FindInIndex (
    WORD expr,
    FILEDATA * f,
    WORD par,
    WORD mode )
```

Definition at line 2664 of file [store.c](#).

4.137.3.27 GetTable()

```
RENUMBER GetTable (
    WORD expr,
    POSITION * position,
    WORD mode )
```

Definition at line 2825 of file [store.c](#).

4.137.3.28 CopyExpression()

```
int CopyExpression (
    FILEHANDLE * from,
    FILEHANDLE * to )
```

Definition at line 3307 of file [store.c](#).

4.137.3.29 WriteStoreHeader()

```
LONG WriteStoreHeader (
    WORD handle )
```

Writes header with information about system architecture and FORM revision to an open store file.

Called by [SetFileIndex\(\)](#).

Parameters

<i>handle</i>	specifies open file to which header will be written
---------------	---

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 3964 of file [store.c](#).

References [STOREHEADER::endianness](#), [STOREHEADER::lenLONG](#), [STOREHEADER::lenPOINTER](#), [STOREHEADER::lenPOS](#), [STOREHEADER::lenWORD](#), [STOREHEADER::maxpower](#), [STOREHEADER::sFun](#), [STOREHEADER::sInd](#), [STOREHEADER::sSym](#), [STOREHEADER::sVec](#), and [STOREHEADER::wildoffset](#).

Referenced by [SetFileIndex\(\)](#).

4.137.3.30 ReadSaveHeader()

```
int ReadSaveHeader (
    void )
```

Reads the header in the save file and sets function pointers and flags according to the information found there. Must be called before any other ReadSave... function.

Currently works only for the exchange between 32bit and 64bit machines (WORD size must be 2 or 4 bytes)!

It is called by [CoLoad\(\)](#).

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 4057 of file [store.c](#).

4.137.3.31 ReadSaveIndex()

```
LONG ReadSaveIndex (
    FILEINDEX * fileind )
```

Reads a FILEINDEX from the open save file specified by AO.SaveData.Handle. Translations for adjusting endianness and data sizes are done if necessary.

Depends on the assumption that sizeof(FILEINDEX) is the same everywhere. If FILEINDEX or INDEXENTRY change, then this functions has to be adjusted.

Called by CoLoad() and FindInIndex().

Parameters

<i>fileind</i>	contains the read FILEINDEX after successful return. must point to allocated, big enough memory.
----------------	--

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 4175 of file [store.c](#).

References [INFILEINDEX](#), [FiLeInDeX::next](#), [FiLeInDeX::number](#), and [FuNcTiOn::number](#).

4.137.3.32 ReadSaveVariables()

```
LONG ReadSaveVariables (
    UBYTE * buffer,
    UBYTE * top,
    LONG * size,
    LONG * outsize,
    INDEXENTRY * ind,
    LONG * stage )
```

Reads the variables from the open file specified by AO.SaveData.Handle. It reads the *size bytes and writes them to the *buffer. It is called by PutInStore().

If translation is necessary, the data might shrink or grow in size, then *size is adjusted so that the reading and writing fits into the memory from the buffer to the top. The actual number of read bytes is returned in *size, the number of written bytes is returned in *outsize.

If the *size is smaller than the actual size of the variables, this function will be called several times and needs to remember the current position in the variable structure. The parameter *stage* does this job. When [ReadSaveVariables\(\)](#) is called for the first time, this parameter should have the value -1.

The parameter *ind* is used to get the number of variables.

Parameters

<i>buffer</i>	read variables are written into this allocated memory
<i>top</i>	upper end of allocated memory
<i>size</i>	number of bytes to read. might return a smaller number of read bytes if translation was necessary
<i>outsize</i>	if translation has be done, outsize contains the number of written bytes
<i>ind</i>	pointer of INDEXENTRY for the current expression. read-only
<i>stage</i>	should be -1 for the first call, will be increased by ReadSaveVariables to memorize the position in the variable structure

Returns

= 0 everything okay, != 0 an error occurred

Definition at line 4361 of file [store.c](#).

References [InDeXeNtRy::nfunctions](#), [InDeXeNtRy::nindices](#), [InDeXeNtRy::nsymbols](#), [InDeXeNtRy::nvectors](#), and [FuNcTiOn::spec](#).

4.137.3.33 ReadSaveTerm32()

```

UBYTE * ReadSaveTerm32 (
    UBYTE * bin,
    UBYTE * binend,
    UBYTE ** bout,
    UBYTE * boutend,
    UBYTE * top,
    int terminbuf )

```

Reads a single term from the given buffer at *bin* and write the translated term back to this buffer at *bout*.

[ReadSaveTerm32\(\)](#) is currently the only instantiation of a ReadSaveTerm-function. It only deals with data that already has the correct endianness and that is resized to 32bit words but without being renumbered or translated in any other way. It uses the compress buffer [AR.CompressBuffer](#).

The function is reentrant in order to cope with nested function arguments. It is called by [ReadSaveExpression\(\)](#) and itself.

The *return value* indicates the position in the input buffer up to which the data has already been successfully processed. The parameter *bout* returns the corresponding position in the output buffer.

Parameters

<i>bin</i>	start of the input buffer
<i>binend</i>	end of the input buffer
<i>bout</i>	as input points to the beginning of the output buffer, as output points behind the already translated data in the output buffer
<i>boutend</i>	end of already decompressed data in output buffer
<i>top</i>	end of output buffer
<i>terminbuf</i>	flag whether decompressed data is already in the output buffer. used in recursive calls

Returns


pointer to the next unprocessed data in the input buffer

Definition at line 4728 of file [store.c](#).

References [ReadSaveTerm32\(\)](#).

Referenced by [ReadSaveExpression\(\)](#), and [ReadSaveTerm32\(\)](#).

Here is the call graph for this function:

**4.137.3.34 ReadSaveExpression()**

```
LONG ReadSaveExpression (
    UBYTE * buffer,
    UBYTE * top,
    LONG * size,
    LONG * outsize )
```

Reads an expression from the open file specified by `AO.SaveData.Handle`. The endianness flip and a resizing without renumbering is done in this function. Thereafter the buffer consists of chunks with a uniform maximal word size (32bit at the moment). The actual renumbering is then done by calling the function [ReadSaveTerm32\(\)](#). The result is returned in *buffer*.

If the translation at some point doesn't fit into the buffer anymore, the function returns and must be called again. In any case *size* returns the number of successfully read bytes, *outsize* returns the number of successfully written bytes, and the file will be positioned at the next byte after the successfully read data.

It is called by `PutInStore()`.

Parameters

<i>buffer</i>	output buffer, holds the (translated) expression
<i>top</i>	end of buffer
<i>size</i>	number of read bytes
<i>outsize</i>	number of written bytes


Returns

= 0 everything okay, != 0 an error occurred

Definition at line 5138 of file [store.c](#).

References [ReadSaveTerm32\(\)](#).

Here is the call graph for this function:



4.138 store.c

[Go to the documentation of this file.](#)

```

00001
00006 /* #[] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032 /*
00033 #define HIDEDEBUG
00034 #[] Includes : store.c
00035 */
00036
00037 #include "form3.h"
00038
00039 /*
00040 #[] Includes :
00041 #[] StoreExpressions :
00042 #[] OpenTemp :
00043
00044 Opens the scratch files for the input -> output operations.
00045
00046 */
00047
00048 void OpenTemp(void)
00049 {
00050     GETIDENTITY
00051     if ( AR.outfile->handle >= 0 ) {
00052         SeekFile(AR.outfile->handle, &(AR.outfile->filesize), SEEK_SET);
00053         AR.outfile->PPosition = AR.outfile->filesize;
00054         AR.outfile->POfill = AR.outfile->PObuffer;
00055     }
00056 }
00057

```

```

00058 /*
00059      #] OpenTemp :
00060      #[ SeekScratch :
00061 */
00062
00063 void SeekScratch(FILEHANDLE *fi, POSITION *pos)
00064 {
00065     *pos = fi->POposition;
00066     ADDPOS(*pos, (TOLONG(fi->POfill)-TOLONG(fi->PObuffer)));
00067 }
00068
00069 /*
00070      #] SeekScratch :
00071      #[ SetEndScratch :
00072 */
00073
00074 void SetEndScratch(FILEHANDLE *f, POSITION *position)
00075 {
00076     if ( f->handle < 0 ) {
00077         SETBASEPOSITION(*position, (f->POfull-f->PObuffer)*sizeof(WORD));
00078     }
00079     else *position = f->filesize;
00080     SetScratch(f, position);
00081 }
00082
00083 /*
00084      #] SetEndScratch :
00085      #[ SetEndHScratch :
00086 */
00087
00088 void SetEndHScratch(FILEHANDLE *f, POSITION *position)
00089 {
00090     if ( f->handle < 0 ) {
00091         SETBASEPOSITION(*position, (f->POfull-f->PObuffer)*sizeof(WORD));
00092         f->POfill = f->POfull;
00093     }
00094     else {
00095 #ifdef HIDEDEBUG
00096         POSITION possize;
00097         PUTZERO(possiz);
00098         SeekFile(f->handle, &possiz, SEEK_END);
00099         MesPrint("SetEndHScratch: filesize(th) = %12p, filesize(ex) = %12p", &(f->filesize),
00100                 &(possiz));
00101 #endif
00102         *position = f->filesize;
00103         f->POposition = f->filesize;
00104         f->POfill = f->POfull = f->PObuffer;
00105     }
00106     /* SetScratch(f, position); */
00107 }
00108
00109 /*
00110      #] SetEndHScratch :
00111      #[ SetScratch :
00112 */
00113
00114 void SetScratch(FILEHANDLE *f, POSITION *position)
00115 {
00116     GETIDENTITY
00117     POSITION possiz;
00118     LONG size, *whichInInBuf;
00119     if ( f == AR.hidefile ) whichInInBuf = &(AR.InHiBuf);
00120     else whichInInBuf = &(AR.InInBuf);
00121 #ifdef HIDEDEBUG
00122     if ( f == AR.hidefile ) MesPrint("In the hide file");
00123     else MesPrint("In the input file");
00124     MesPrint("SetScratch to position %15p", position);
00125     MesPrint("POposition = %15p, full = %1, fill = %1"
00126             , &(f->POposition), (f->POfull-f->PObuffer)*sizeof(WORD)
00127             , (f->POfill-f->PObuffer)*sizeof(WORD));
00128 #endif
00129     if ( ISLESSPOS(*position, f->POposition) ||
00130         ISGEPOSINC(*position, f->POposition, (f->POfull-f->PObuffer)*sizeof(WORD)) ) {
00131         if ( f->handle < 0 ) {
00132             if ( ISEQUALPOSINC(*position, f->POposition,
00133                               (f->POfull-f->PObuffer)*sizeof(WORD)) ) goto endpos;
00134             MesPrint("Illegal position in SetScratch");
00135             Terminate(-1);
00136         }
00137         possiz = *position;
00138         LOCK(AS.inputslock);
00139         SeekFile(f->handle, &possiz, SEEK_SET);
00140         if ( ISNOTEQUALPOS(possiz, *position) ) {
00141             UNLOCK(AS.inputslock);
00142             MesPrint("Cannot position file in SetScratch");
00143             Terminate(-1);
00144         }
00145     }

```

```

00145 #ifdef HIDEDEBUG
00146     MesPrint("SetScratch1(%w): position = %l2p, size = %l, address =
00147     %x",position,f->POsize,f->PObuffer);
00148 #endif
00149     if ( ( size = ReadFile(f->handle, (UBYTE *) (f->PObuffer),f->POsize) ) < 0
00150     || ( size & 1 ) != 0 ) {
00151         UNLOCK(AS.inputslock);
00152         MesPrint("Read error in SetScratch");
00153         Terminate(-1);
00154     }
00155     UNLOCK(AS.inputslock);
00156     if ( size == 0 ) {
00157         f->PObuffer[0] = 0;
00158     }
00159     f->POfill = f->PObuffer;
00160     f->POposition = *position;
00161 #ifdef WORD2
00162     *whichInInBuf = size » 1;
00163 #else
00164     *whichInInBuf = size / TABLESIZE(WORD,UBYTE);
00165 #endif
00166     f->POfull = f->PObuffer + *whichInInBuf;
00167 #ifdef HIDEDEBUG
00168     MesPrint("SetScratch2: size = %l, InInBuf = %l, fill = %l, full = %l"
00169     ,size,*whichInInBuf,(f->POfill-f->PObuffer)*sizeof(WORD)
00170     ,(f->POfull-f->PObuffer)*sizeof(WORD));
00171 #endif
00172     }
00173     else {
00174     endpos:
00175         DIFPOS(possiz,*position,f->POposition);
00176         f->POfill = (WORD *) (BASEPOSITION(possiz)+(UBYTE *) (f->PObuffer));
00177         *whichInInBuf = f->POfull-f->POfill;
00178     }
00179 }
00180 /*
00181     #] SetScratch :
00182     #[ RevertScratch :
00183
00184     Reverts the input/output directions. This way input comes
00185     always from AR.infile
00186 */
00187 int RevertScratch(void)
00188 {
00189     GETIDENTITY
00190     FILEHANDLE *f;
00191     if ( AR.infile->handle >= 0 && AR.infile->handle != AR.outfile->handle ) {
00192         CloseFile(AR.infile->handle);
00193         AR.infile->handle = -1;
00194         remove(AR.infile->name);
00195     }
00196     f = AR.infile; AR.infile = AR.outfile; AR.outfile = f;
00197     AR.infile->POfull = AR.infile->POfill;
00198     AR.infile->POfill = AR.infile->PObuffer;
00199     if ( AR.infile->handle >= 0 ) {
00200         POSITION scrpos;
00201         PUTZERO(scrpos);
00202         SeekFile(AR.infile->handle,&scrpos,SEEK_SET);
00203         if ( ISNOTZEROPOS(scrpos) ) {
00204             return(MesPrint("Error with scratch output."));
00205         }
00206         if ( ( AR.InInBuf = ReadFile(AR.infile->handle, (UBYTE *) (AR.infile->PObuffer)
00207         ,AR.infile->POsize) ) < 0 || AR.InInBuf & 1 ) {
00208             return(MesPrint("Error while reading from scratch file"));
00209         }
00210         else {
00211             AR.InInBuf /= TABLESIZE(WORD,UBYTE);
00212         }
00213         AR.infile->POfull = AR.infile->PObuffer + AR.InInBuf;
00214     }
00215     PUTZERO(AR.infile->POposition);
00216     AR.outfile->POfill = AR.outfile->POfull = AR.outfile->PObuffer;
00217     PUTZERO(AR.outfile->POposition);
00218     PUTZERO(AR.outfile->filesize);
00219     return(0);
00220 }
00221 /*
00222     #] RevertScratch :
00223     #[ ResetScratch :
00224
00225     Resets the output scratch file to its beginning in such a way
00226     that the write routines can read it. The output buffers are
00227     left untouched as they may still be needed for extra declarations.
00228 */

```

```

00231
00232 */
00233
00234 int ResetScratch(void)
00235 {
00236     GETIDENTITY
00237     FILEHANDLE *f;
00238     if ( AR.infile->handle >= 0 ) {
00239         CloseFile(AR.infile->handle); AR.infile->handle = -1;
00240         remove(AR.infile->name);
00241         PUTZERO(AR.infile->POposition);
00242         AR.infile->POfill = AR.infile->POfull = AR.infile->PObuffer;
00243     }
00244     if ( AR.outfile->handle >= 0 ) {
00245         POSITION scrpos;
00246         PUTZERO(scrpos);
00247         SeekFile(AR.outfile->handle,&scrpos,SEEK_SET);
00248         if ( ISNOTZEROPOS(scrpos) ) {
00249             return(MesPrint("Error with scratch output."));
00250         }
00251         if ( ( AR.InInBuf = ReadFile(AR.outfile->handle,(UBYTE *) (AR.outfile->PObuffer)
00252 ,AR.outfile->POsize) ) < 0 || AR.InInBuf & 1 ) {
00253             return(MesPrint("Error while reading from scratch file"));
00254         }
00255         else AR.InInBuf /= TABLESIZE(WORD,UBYTE);
00256         AR.outfile->POfull = AR.outfile->PObuffer + AR.InInBuf;
00257     }
00258     else AR.outfile->POfull = AR.outfile->POfill;
00259     AR.outfile->POfill = AR.outfile->PObuffer;
00260     PUTZERO(AR.outfile->POposition);
00261     f = AR.outfile; AR.outfile = AR.infile; AR.infile = f;
00262     return(0);
00263 }
00264
00265 /*
00266     #] ResetScratch :
00267     #[ ReadFromScratch :
00268
00269     Routine is used to copy files from scratch to hide.
00270 */
00271
00272 int ReadFromScratch(FILEHANDLE *fi, POSITION *pos, UBYTE *buffer, POSITION *length)
00273 {
00274     GETIDENTITY
00275     LONG l = BASEPOSITION(*length);
00276     if ( fi->handle < 0 ) {
00277         memcpy(buffer,fi->POfill,l);
00278     }
00279     else {
00280         SeekFile(fi->handle,pos,SEEK_SET);
00281         if ( ReadFile(fi->handle,buffer,l) != l ) {
00282             if ( fi == AR.hidefile )
00283                 MesPrint("Error reading from hide file.");
00284             else
00285                 MesPrint("Error reading from scratch file.");
00286             return(-1);
00287         }
00288     }
00289     return(0);
00290 }
00291
00292 /*
00293     #] ReadFromScratch :
00294     #[ AddToScratch :
00295
00296     Routine is used to copy files from scratch to hide.
00297 */
00298
00299 int AddToScratch(FILEHANDLE *fi, POSITION *pos, UBYTE *buffer, POSITION *length,
00300 int withflush)
00301 {
00302     GETIDENTITY
00303     LONG l = BASEPOSITION(*length), avail;
00304     DUMMYUSE(pos)
00305     fi->POfill = fi->POfull;
00306     while ( fi->POfill+l/sizeof(WORD) > fi->POstop ) {
00307         avail = (fi->POstop-fi->POfill)*sizeof(WORD);
00308         if ( avail > 0 ) {
00309             memcpy(fi->POfill,buffer,avail);
00310             l -= avail; buffer += avail;
00311         }
00312         if ( fi->handle < 0 ) {
00313             if ( ( fi->handle = (WORD)CreateFile(fi->name) ) < 0 ) {
00314                 if ( fi == AR.hidefile )
00315                     MesPrint("Cannot create hide file %s",fi->name);
00316                 else
00317                     MesPrint("Cannot create scratch file %s",fi->name);

```

```

00318         return(-1);
00319     }
00320     PUTZERO(fi->POposition);
00321 }
00322 SeekFile(fi->handle, &(fi->POposition), SEEK_SET);
00323 if ( WriteFile(fi->handle, (UBYTE *)fi->PObuffer, fi->POsize) != fi->POsize )
00324     goto writeerror;
00325 ADDPOS(fi->POposition, fi->POsize);
00326 fi->POfill = fi->POfull = fi->PObuffer;
00327 }
00328 if ( l > 0 ) {
00329     memcpy(fi->POfill, buffer, l);
00330     fi->POfill += l/sizeof(WORD);
00331     fi->POfull = fi->POfill;
00332 }
00333 if ( withflush && fi->handle >= 0 && fi->POfill > fi->PObuffer ) { /* flush */
00334     l = (LONG)fi->POfill - (LONG)fi->PObuffer;
00335     SeekFile(fi->handle, &(fi->POposition), SEEK_SET);
00336     if ( WriteFile(fi->handle, (UBYTE *)fi->PObuffer, l) != l ) goto writeerror;
00337     ADDPOS(fi->POposition, fi->POsize);
00338     fi->POfill = fi->POfull = fi->PObuffer;
00339 }
00340 if ( withflush && fi->handle >= 0 )
00341     SETBASEPOSITION(fi->filesize, TellFile(fi->handle));
00342 return(0);
00343 writeerror:
00344 if ( fi == AR.hidefile )
00345     MesPrint("Error writing to hide file. Disk full?");
00346 else
00347     MesPrint("Error writing to scratch file. Disk full?");
00348 return(-1);
00349 }
00350
00351 /*
00352     #] AddToScratch :
00353     #[ CoSave :
00354
00355     The syntax of the save statement is:
00356
00357     save filename
00358     save filename expr1 expr2
00359 */
00360
00361 int CoSave(UBYTE *inp)
00362 {
00363     GETIDENTITY
00364     UBYTE *p, c;
00365     WORD n = 0, i;
00366     WORD error = 0, type, number;
00367     WORD exprInStorageFlag = 0;
00368     LONG RetCode = 0, wSize;
00369     EXPRESSIONS e;
00370     INDEXENTRY *ind;
00371     INDEXENTRY *indold;
00372     WORD TMproto[SUBEXPSIZE];
00373     POSITION scrpos, scrpos1, filesize;
00374     int ii, j = sizeof(FILEINDEX)/(sizeof(LONG));
00375     LONG *lo;
00376     while ( *inp == ',' ) inp++;
00377     p = inp;
00378
00379 #ifdef WITHMPI
00380     if ( PF.me != MASTER ) return(0);
00381 #endif
00382
00383     if ( !*p ) return(MesPrint("No filename in save statement"));
00384     if ( FG.cTable[*p] > 1 && ( *p != '.' ) && ( *p != SEPARATOR ) && ( *p != ALTSEPARATOR ) )
00385         return(MesPrint("Illegal filename"));
00386     while ( **p && *p != ',' ) {}
00387     c = *p;
00388     *p = 0;
00389     if ( !AP.preError ) {
00390         if ( ( RetCode = CreateFile((char *)inp) ) < 0 ) {
00391             return(MesPrint("Cannot open file %s", inp));
00392         }
00393     }
00394     AO.SaveData.Handle = (WORD)RetCode;
00395     PUTZERO(filesize);
00396
00397     e = Expressions;
00398     n = NumExpressions;
00399     if ( c ) { /* There follows a list of expressions */
00400         *p++ = c;
00401         inp = p;
00402         i = (WORD)(INFILEINDEX);
00403         if ( WriteStoreHeader(AO.SaveData.Handle) ) return(MesPrint("Error writing storage file

```

```

header"));
00405 /* PUTZERO(AO.SaveData.Index.number); */
00406 /* PUTZERO(AO.SaveData.Index.next); */
00407 lo = (LONG *)(&AO.SaveData.Index);
00408 for ( ii = 0; ii < j; ii++ ) *lo++ = 0;
00409 SETBASEPOSITION(AO.SaveData.Position, (LONG)sizeof(STOREHEADER));
00410 ind = AO.SaveData.Index.expression;
00411 if ( !AP.preError && WriteFile(AO.SaveData.Handle, (UBYTE *)(&(AO.SaveData.Index))
00412 , (LONG)sizeof(struct FileInDeX))!= (LONG)sizeof(struct FileInDeX) ) goto SavWrt;
00413 SeekFile(AO.SaveData.Handle, &(filesize), SEEK_END);
00414 /* ADDPOS(filesize, sizeof(struct FileInDeX)); */
00415
00416 do { /* Scan the list */
00417     if ( !FG.cTable[*p] || *p == '[' ) {
00418         p = SkipAName(p);
00419         if ( p == 0 ) return(-1);
00420     }
00421     c = *p; *p = 0;
00422     if ( GetVar(inp, &type, &number, CEXPRESSION, NOAUTO) != NAMENOTFOUND ) {
00423         if ( e[number].status == STOREDEXPRESSION ) {
00424             if ( StrLen(AC.exprnames->namebuffer+e[number].name) > MAXENAME ) {
00425                 char msg[100];
00426                 snprintf(msg, sizeof(msg), "saved expr name over %d char: %s", MAXENAME,
AC.exprnames->namebuffer+e[number].name);
00427                 Warning(msg);
00428             }
00429 /*
00430 Here we have to locate the stored expression, copy its index entry
00431 possibly after making a new fileindex and then copy the whole
00432 expression.
00433 */
00434         if ( AP.preError ) goto NextExpr;
00435         TMproto[0] = EXPRESSION;
00436         TMproto[1] = SUBEXPSIZE;
00437         TMproto[2] = number;
00438         TMproto[3] = 1;
00439         { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
00440         AT.TMaddr = TMproto;
00441         if ( ( indold = FindInIndex(number, &AR.StoreData, 0, 0) ) != 0 ) {
00442             if ( i <= 0 ) {
00443 /*
00444             AO.SaveData.Index.next = filesize;
00445 */
00446             SeekFile(AO.SaveData.Handle, &(AO.SaveData.Index.next), SEEK_END);
00447             scrpos = AO.SaveData.Position;
00448             SeekFile(AO.SaveData.Handle, &scrpos, SEEK_SET);
00449             if ( ISNOTEQUALPOS(scrpos, AO.SaveData.Position) ) goto SavWrt;
00450             if ( WriteFile(AO.SaveData.Handle, (UBYTE *)(&(AO.SaveData.Index))
00451 , (LONG)sizeof(struct FileInDeX)) != (LONG)sizeof(struct FileInDeX)
00452 )
00453                 goto SavWrt;
00454             i = (WORD)(INFILEINDEX);
00455             AO.SaveData.Position = AO.SaveData.Index.next;
00456             lo = (LONG *)(&AO.SaveData.Index);
00457             for ( ii = 0; ii < j; ii++ ) *lo++ = 0;
00458             ind = AO.SaveData.Index.expression;
00459             scrpos = AO.SaveData.Position;
00460             SeekFile(AO.SaveData.Handle, &scrpos, SEEK_SET);
00461             if ( ISNOTEQUALPOS(scrpos, AO.SaveData.Position) ) goto SavWrt;
00462             if ( WriteFile(AO.SaveData.Handle, (UBYTE *)(&(AO.SaveData.Index))
00463 , (LONG)sizeof(struct FileInDeX)) != (LONG)sizeof(struct FileInDeX) )
00464                 goto SavWrt;
00465             ADDPOS(filesize, sizeof(struct FileInDeX));
00466             }
00467             *ind = *indold;
00468 /*
00469 ind->variables = SeekFile(AO.SaveData.Handle, &(AM.zeropos), SEEK_END);
00470 */
00471             ind->variables = filesize;
00472             ind->position = ind->variables;
00473             ADDPOS(ind->position, DIFBASE(indold->position, indold->variables));
00474             SeekFile(AR.StoreData.Handle, &(indold->variables), SEEK_SET);
00475             wSize = TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer);
00476             scrpos = ind->length;
00477             ADDPOS(scrpos, DIFBASE(ind->position, ind->variables));
00478             ADD2POS(filesize, scrpos);
00479             SETBASEPOSITION(scrpos1, wSize);
00480             do {
00481                 if ( ISLESSPOS(scrpos, scrpos1) ) wSize = BASEPOSITION(scrpos);
00482                 if ( ReadFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer, wSize)
00483 != wSize ) {
00484                     MesPrint("ReadError");
00485                     error = -1;
00486                     goto EndSave;
00487                 }
00488                 if ( WriteFile(AO.SaveData.Handle, (UBYTE *)AT.WorkPointer, wSize)
00489 != wSize ) goto SavWrt;

```



```

00489             ADDPOS(scrpos,-wSize);
00490         } while ( ISPOSPOS(scrpos) );
00491         ADDPOS(AO.SaveData.Index.number,1);
00492         ind++;
00493     }
00494     else error = -1;
00495     i--;
00496 }
00497 else {
00498     MesPrint("%s is not a stored expression",inp);
00499     error = -1;
00500 }
00501 NextExpr;;
00502 }
00503 else {
00504     MesPrint("%s is not an expression",inp);
00505     error = -1;
00506 }
00507 *p = c;
00508 if ( c != ',' && c ) {
00509     MesComp("Illegal character",inp,p);
00510     error = -1;
00511     goto EndSave;
00512 }
00513 if ( c ) c = *++p;
00514 inp = p;
00515 } while ( c );
00516 if ( !AP.preError ) {
00517     scrpos = AO.SaveData.Position;
00518     SeekFile(AO.SaveData.Handle,&scrpos,SEEK_SET);
00519     if ( ISNOTEQUALPOS(scrpos,AO.SaveData.Position) ) goto SavWrt;
00520 }
00521 if ( !AP.preError &&
00522     WriteFile(AO.SaveData.Handle,(UBYTE *)(&(AO.SaveData.Index))
00523         ,(LONG)sizeof(struct FileInDeX)) != (LONG)sizeof(struct FileInDeX) ) goto SavWrt;
00524 }
00525 else if ( !AP.preError ) { /* All stored expressions should be saved. Easy */
00526     /* Make sure there is at least one stored expression: */
00527     if ( n > 0 ) { do {
00528         if ( StrLen(AC.exprnames->namebuffer+e->name) > MAXENAME ) {
00529             char msg[100];
00530             snprintf(msg, sizeof(msg), "saved expr name over %d char: %s", MAXENAME,
00531                 AC.exprnames->namebuffer+e->name);
00532             Warning(msg);
00533         }
00534         if ( e->status == STOREDEXPRESSION ) exprInStorageFlag = 1;
00535         e++;
00536     } while ( --n > 0 ); }
00537     if ( exprInStorageFlag ) {
00538         wSize = TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer);
00539         PUTZERO(scrpos);
00540         SeekFile(AR.StoreData.Handle,&scrpos,SEEK_SET); /* Start at the beginning */
00541         scrpos = AR.StoreData.Fill; /* Number of bytes to be copied */
00542         SETBASEPOSITION(scrpos1,wSize);
00543         do {
00544             if ( ISLESSPOS(scrpos,scrpos1) ) wSize = BASEPOSITION(scrpos);
00545             if ( ReadFile(AR.StoreData.Handle,(UBYTE *)AT.WorkPointer,wSize) != wSize ) {
00546                 MesPrint("ReadError");
00547                 error = -1;
00548                 goto EndSave;
00549             }
00550             if ( WriteFile(AO.SaveData.Handle,(UBYTE *)AT.WorkPointer,wSize) != wSize )
00551                 goto SavWrt;
00552             ADDPOS(scrpos,-wSize);
00553         } while ( ISPOSPOS(scrpos) );
00554     }
00555 EndSave:
00556     if ( !AP.preError ) {
00557         CloseFile(AO.SaveData.Handle);
00558         AO.SaveData.Handle = -1;
00559     }
00560     return(error);
00561 SavWrt:
00562     MesPrint("WriteError");
00563     error = -1;
00564     goto EndSave;
00565 }
00566
00567 /*
00568     #] CoSave :
00569     #[ CoLoad :
00570 */
00571
00572 int CoLoad(UBYTE *inp)
00573 {
00574     GETIDENTITY

```

```

00575     INDEXENTRY *ind;
00576     LONG RetCode;
00577     UBYTE *p, c;
00578     WORD num, i, error = 0;
00579     WORD type, number, silentload = 0;
00580     WORD TMproto[SUBEXPSIZE];
00581     POSITION scrpos, firstposition;
00582     while ( *inp == ',' ) inp++;
00583     p = inp;
00584     if ( ( *p == ',' && p[1] == '-' ) || *p == '-' ) {
00585         if ( *p == ',' ) p++;
00586         p++;
00587         if ( *p == 's' || *p == 'S' ) {
00588             silentload = 1;
00589             while ( *p && ( *p != ',' && *p != '-' && *p != '+'
00590                 && *p != SEPARATOR && *p != ALTSEPARATOR && *p != '.' ) ) p++;
00591         }
00592         else if ( *p != ',' ) {
00593             return(MesPrint("Illegal option in Load statement"));
00594         }
00595         while ( *p == ',' ) p++;
00596     }
00597     inp = p;
00598     if ( !*p ) return(MesPrint("No filename in load statement"));
00599     if ( FG.cTable[*p] > 1 && ( *p != '.' ) && ( *p != SEPARATOR ) && ( *p != ALTSEPARATOR ) )
00600         return(MesPrint("Illegal filename"));
00601     while ( ++p && *p != ',' ) {}
00602     c = *p;
00603     *p = 0;
00604     if ( ( RetCode = OpenFile((char *)inp) ) < 0 ) {
00605         return(MesPrint("Cannot open file %s",inp));
00606     }
00607
00608     if ( SetFileIndex() ) {
00609         MesCall("CoLoad");
00610         SETERROR(-1)
00611     }
00612
00613     AO.SaveData.Handle = (WORD) (RetCode);
00614
00615     #ifdef SYSDEPENDENTSAVE
00616     if ( ReadFile(AO.SaveData.Handle, (UBYTE *) (&(AO.SaveData.Index)),
00617         (LONG)sizeof(struct FileInDeX) != (LONG)sizeof(struct FileInDeX) ) goto LoadRead;
00618     #else
00619     if ( ReadSaveHeader() ) goto LoadRead;
00620     TELLFIL(AO.SaveData.Handle,&firstposition);
00621     if ( ReadSaveIndex(&AO.SaveData.Index) ) goto LoadRead;
00622     #endif
00623     if ( c ) { /* There follows a list of expressions */
00624         *p++ = c;
00625         inp = p;
00626
00627         do { /* Scan the list */
00628             if ( !FG.cTable[*p] || *p == '[' ) {
00629                 p = SkipAName(p);
00630                 if ( p == 0 ) return(-1);
00631             }
00632             c = *p; *p = 0;
00633             if ( GetVar(inp,&type,&number,ALLVARIABLES,NOAUTO) != NAMENOTFOUND ) {
00634                 MesPrint("Conflicting name: %s",inp);
00635                 error = -1;
00636             }
00637             else {
00638                 if ( ( num = EntVar(CEXPRESSION,inp,STOREDEXPRESSION,0,0,0) ) >= 0 ) {
00639                     TMproto[0] = EXPRESSION;
00640                     TMproto[1] = SUBEXPSIZE;
00641                     TMproto[2] = num;
00642                     TMproto[3] = 1;
00643                     { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
00644                     AT.TMaddr = TMproto;
00645                     SeekFile(AO.SaveData.Handle,&firstposition,SEEK_SET);
00646                     AO.SaveData.Position = firstposition;
00647                     if ( ReadSaveIndex(&AO.SaveData.Index) ) goto LoadRead;
00648                     if ( ( ind = FindInIndex(num,&AO.SaveData,1,0) ) != 0 ) {
00649                         if ( !error ) {
00650                             if ( PutInStore(ind,num) ) error = -1;
00651                             else if ( !AM.silent && silentload == 0 )
00652                                 MesPrint(" %s loaded",ind->name);
00653                         }
00654                     }
00655                     /*
00656                     !!! Added 1-feb-1998
00657                     */
00657                     Expressions[num].counter = -1;
00658                 }
00659             else {
00660                 MesPrint(" %s not found",inp);
00661                 error = -1;

```

```

00662         }
00663     }
00664     else error = -1;
00665 }
00666 *p = c;
00667 if ( c != ',' && c ) {
00668     MesComp("Illegal character",inp,p);
00669     error = -1;
00670     goto EndLoad;
00671 }
00672 if ( c ) c = *++p;
00673 inp = p;
00674 } while ( c );
00675 scrpos = AR.StoreData.Position;
00676 SeekFile(AR.StoreData.Handle,&scrpos,SEEK_SET);
00677 if ( ISNOTEQUALPOS(scrpos,AR.StoreData.Position) ) goto LoadWrt;
00678 if ( WriteFile(AR.StoreData.Handle,(UBYTE *) (&(AR.StoreData.Index))
00679     ,(LONG)sizeof(struct FileInDeX)) != (LONG)sizeof(struct FileInDeX) ) goto LoadWrt;
00680 }
00681 else { /* All saved expressions should be stored. Easy */
00682     i = (WORD)BASEPOSITION(AO.SaveData.Index.number);
00683     ind = AO.SaveData.Index.expression;
00684 #ifndef SYSDEPENDENTSAVE
00685     if ( i > 0 ) { do {
00686         if ( GetVar((UBYTE *) (ind->name),&type,&number,ALLVARIABLES,NOAUTO) != NAMENOTFOUND ) {
00687             MesPrint("Conflicting name: %s",ind->name);
00688             error = -1;
00689         }
00690     } else {
00691         if ( ( num = EntVar(CEXPRESSION,(UBYTE *) (ind->name),STOREDEXPRESSION,0,0,0) ) >= 0 )
00692         {
00693             if ( !error ) {
00694                 if ( PutInStore(ind,num) ) error = -1;
00695                 else if ( !AM.silent && silentload == 0 )
00696                     MesPrint(" %s loaded",ind->name);
00697             }
00698             else error = -1;
00699         }
00700         i--;
00701         if ( i == 0 && ISNOTZEROPOS(AO.SaveData.Index.next) ) {
00702             SeekFile(AO.SaveData.Handle,&(AO.SaveData.Index.next),SEEK_SET);
00703             if ( ReadFile(AO.SaveData.Handle,(UBYTE *) (&(AO.SaveData.Index)),
00704                 (LONG)sizeof(struct FileInDeX)) != (LONG)sizeof(struct FileInDeX) ) goto LoadRead;
00705             i = (WORD)BASEPOSITION(AO.SaveData.Index.number);
00706             ind = AO.SaveData.Index.expression;
00707         }
00708         else ind++;
00709     } while ( i > 0 ); }
00710 #else
00711     if ( i > 0 ) {
00712         do {
00713             if ( GetVar((UBYTE *) (ind->name),&type,&number,ALLVARIABLES,NOAUTO) != NAMENOTFOUND )
00714             {
00715                 MesPrint("Conflicting name: %s",ind->name);
00716                 error = -1;
00717             }
00718             else {
00719                 if ( ( num = EntVar(CEXPRESSION,(UBYTE *) (ind->name),STOREDEXPRESSION,0,0,0) ) >=
00720                 0 ) {
00721                     if ( !error ) {
00722                         if ( PutInStore(ind,num) ) error = -1;
00723                         else if ( !AM.silent && silentload == 0 )
00724                             MesPrint(" %s loaded",ind->name);
00725                     }
00726                     else error = -1;
00727                 }
00728                 i--;
00729                 if ( i == 0 && (ISNOTZEROPOS(AO.SaveData.Index.next) || AO.bufferedInd) ) {
00730                     SeekFile(AO.SaveData.Handle,&(AO.SaveData.Index.next),SEEK_SET);
00731                     if ( ReadSaveIndex(&AO.SaveData.Index) ) goto LoadRead;
00732                     i = (WORD)BASEPOSITION(AO.SaveData.Index.number);
00733                     ind = AO.SaveData.Index.expression;
00734                 }
00735                 else ind++;
00736             } while ( i > 0 ); }
00737 #endif
00738 }
00739 EndLoad:
00740 #ifndef SYSDEPENDENTSAVE
00741     if ( AO.powerFlag ) {
00742         MesPrint("WARNING: min-/maxpower had to be adjusted!");
00743     }
00744     if ( AO.resizeFlag ) {
00745         MesPrint("ERROR: could not downsize data!");

```

```

00746         return ( -2 );
00747     }
00748 #endif
00749     CloseFile(AO.SaveData.Handle);
00750     AO.SaveData.Handle = -1;
00751     SeekFile(AR.StoreData.Handle,&(AC.StoreFileSize),SEEK_END);
00752     return(error);
00753 LoadWrt:
00754     MesPrint("WriteError");
00755     error = -1;
00756     goto EndLoad;
00757 LoadRead:
00758     MesPrint("ReadError");
00759     error = -1;
00760     goto EndLoad;
00761 }
00762
00763 /*
00764     #] CoLoad :
00765     #[ DeleteStore :
00766
00767     Routine deletes the contents of the entire storage file.
00768     We close the file and recreate it.
00769     If par > 0 we have to remove the expressions from the namelists.
00770 */
00771
00772 int DeleteStore(WORD par)
00773 {
00774     GETIDENTITY
00775     char *s;
00776     WORD j, n = 0;
00777     EXPRESSIONS e_in, e_out;
00778     WORD DidClean = 0;
00779     if ( AR.StoreData.Handle >= 0 ) {
00780         if ( par > 0 ) {
00781             n = NumExpressions;
00782             j = 0;
00783             e_in = e_out = Expressions;
00784             if ( n > 0 ) { do {
00785                 if ( e_in->status == STOREDEXPRESSION ) {
00786                     NAMENODE *node = GetNode(AC.exprnames,
00787                                             AC.exprnames->namebuffer+e_in->name);
00788                     node->type = CDELETE;
00789                     DidClean = 1;
00790                 }
00791                 else {
00792                     if ( e_out != e_in ) {
00793                         NAMENODE *node;
00794                         node = GetNode(AC.exprnames,
00795                                       AC.exprnames->namebuffer+e_in->name);
00796                         node->number = (WORD)(e_out - Expressions);
00797                         e_out->onfile = e_in->onfile;
00798                         e_out->prototype = e_in->prototype;
00799                         e_out->printfflag = 0;
00800                         e_out->status = e_in->status;
00801                         e_out->name = e_in->name;
00802                         e_out->inmem = e_in->inmem;
00803                         e_out->counter = e_in->counter;
00804                         e_out->numfactors = e_in->numfactors;
00805                         e_out->numdummies = e_in->numdummies;
00806                         e_out->compression = e_in->compression;
00807                         e_out->namesize = e_in->namesize;
00808                         e_out->whichbuffer = e_in->whichbuffer;
00809                         e_out->hidelevel = e_in->hidelevel;
00810                         e_out->node = e_in->node;
00811                         e_out->replace = e_in->replace;
00812                         e_out->vflags = e_in->vflags;
00813                         e_out->uflags = e_in->uflags;
00814 #ifdef PARALLELCODE
00815                         e_out->partodo = e_in->partodo;
00816 #endif
00817                     }
00818                     e_out++;
00819                     j++;
00820                 }
00821                 e_in++;
00822             } while ( --n > 0 ); }
00823             NumExpressions = j;
00824             if ( DidClean ) CompactifyTree(AC.exprnames,EXPRNAMES);
00825         }
00826         AR.StoreData.Handle = -1;
00827         CloseFile(AC.StoreHandle);
00828         AC.StoreHandle = -1;
00829     }
00830     /*
00831         Knock out the storage caches (25-apr-1990!)
00832     */

```

```

00833         STORECACHE st;
00834         st = (STORECACHE) (AT.StoreCache);
00835         while ( st ) {
00836             SETBASEPOSITION(st->position,-1);
00837             SETBASEPOSITION(st->toppos,-1);
00838             st = st->next;
00839         }
00840 #ifdef WITHPTHREADS
00841         for ( j = 1; j < AM.totalnumberofthreads; j++ ) {
00842             st = (STORECACHE) (AB[j]->T.StoreCache);
00843             while ( st ) {
00844                 SETBASEPOSITION(st->position,-1);
00845                 SETBASEPOSITION(st->toppos,-1);
00846                 st = st->next;
00847             }
00848         }
00849 #endif
00850     }
00851     PUTZERO(AC.StoreFileSize);
00852     s = FG.fname; while ( *s ) s++;
00853 #ifdef VMS
00854     *s = ','; s[1] = '*'; s[2] = 0;
00855     remove(FG.fname);
00856     *s = 0;
00857 #endif
00858     return(AC.StoreHandle = CreateFile(FG.fname));
00859 }
00860 else return(0);
00861 }
00862
00863 /*
00864     #] DeleteStore :
00865     #[ PutInStore :
00866
00867     Copies the expression indicated by ind from a load file to the
00868     internal storage file. A return value of zero indicates that
00869     everything is OK.
00870 */
00871 */
00872
00873 int PutInStore(INDEXENTRY *ind, WORD num)
00874 {
00875     GETIDENTITY
00876     INDEXENTRY *newind;
00877     LONG wSize;
00878 #ifndef SYSDEPENDENTSAVE
00879     LONG wSizeOut;
00880     LONG stage;
00881 #endif
00882     POSITION scrpos,scrpos1;
00883     newind = NextFileIndex(&(Expressions[num].onfile));
00884     *newind = *ind;
00885 #ifndef SYSDEPENDENTSAVE
00886     SETBASEPOSITION(newind->length, 0);
00887 #endif
00888     newind->variables = AR.StoreData.Fill;
00889     SeekFile(AR.StoreData.Handle,&(newind->variables),SEEK_SET);
00890     if ( ISNOTEQUALPOS(newind->variables,AR.StoreData.Fill) ) goto PutErrS;
00891     newind->position = newind->variables;
00892 #ifdef SYSDEPENDENTSAVE
00893     ADDPOS(newind->position,DIFBASE(ind->position,ind->variables));
00894 #endif
00895     /* set read position to ind->variables */
00896     scrpos = ind->variables;
00897     SeekFile(AO.SaveData.Handle,&scrpos,SEEK_SET);
00898     if ( ISNOTEQUALPOS(scrpos,ind->variables) ) goto PutErrS;
00899     /* set max size for read-in */
00900     wSize = TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer);
00901 #ifdef SYSDEPENDENTSAVE
00902     scrpos = ind->length;
00903     ADDPOS(scrpos,DIFBASE(ind->position,ind->variables));
00904     ADD2POS(AR.StoreData.Fill,scrpos);
00905 #endif
00906     SETBASEPOSITION(scrpos1,wSize);
00907 #ifndef SYSDEPENDENTSAVE
00908     /* prepare look-up table for tensor functions */
00909     if ( ind->nfunctions ) {
00910         AO.tensorList = (UBYTE *)Malloc1(MAXSAVEFUNCTION,"PutInStore");
00911     }
00912     SETBASEPOSITION(scrpos, DIFBASE(ind->position,ind->variables));
00913     /* copy variables first */
00914     stage = -1;
00915     do {
00916         wSize = TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer);
00917         if ( ISLESSPOS(scrpos,scrpos1) ) wSize = BASEPOSITION(scrpos);
00918         wSizeOut = wSize;
00919         if ( ReadSaveVariables(

```

```

00920         (UBYTE *)AT.WorkPointer, (UBYTE *)AT.WorkTop, &wSize, &wSizeOut, ind, &stage) ) {
00921         goto PutErrS;
00922     }
00923     if ( WriteFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer, wSizeOut)
00924         != wSizeOut ) goto PutErrS;
00925     ADDPOS(scrpos,-wSize);
00926     ADDPOS(newind->position, wSizeOut);
00927     ADDPOS(AR.StoreData.Fill, wSizeOut);
00928     } while ( ISPOSPOS(scrpos) );
00929     /* then copy the expression itself */
00930     wSize = TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer);
00931     scrpos = ind->length;
00932 #endif
00933     do {
00934         wSize = TOLONG(AT.WorkTop) - TOLONG(AT.WorkPointer);
00935         if ( ISLESSPOS(scrpos,scrpos1) ) wSize = BASEPOSITION(scrpos);
00936 #ifndef SYSDEPENDENTSAVE
00937         if ( ReadFile(AO.SaveData.Handle, (UBYTE *)AT.WorkPointer,wSize)
00938             != wSize ) goto PutErrS;
00939         if ( WriteFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer,wSize)
00940             != wSize ) goto PutErrS;
00941         ADDPOS(scrpos,-wSize);
00942 #else
00943         wSizeOut = wSize;
00944
00945         if ( ReadSaveExpression((UBYTE *)AT.WorkPointer, (UBYTE *)AT.WorkTop, &wSize, &wSizeOut) ) {
00946             goto PutErrS;
00947         }
00948
00949         if ( WriteFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer, wSizeOut)
00950             != wSizeOut ) goto PutErrS;
00951         ADDPOS(scrpos,-wSize);
00952         ADDPOS(AR.StoreData.Fill, wSizeOut);
00953         ADDPOS(newind->length, wSizeOut);
00954 #endif
00955     } while ( ISPOSPOS(scrpos) );
00956     /* free look-up table for tensor functions */
00957     if ( ind->nfunctions ) {
00958         M_free(AO.tensorList,"PutInStore");
00959     }
00960     scrpos = AR.StoreData.Position;
00961     SeekFile(AR.StoreData.Handle,&scrpos,SEEK_SET);
00962     if ( ISNOTEQUALPOS(scrpos,AR.StoreData.Position) ) goto PutErrS;
00963     if ( WriteFile(AR.StoreData.Handle, (UBYTE *)(&AR.StoreData.Index), (LONG)sizeof(FILEINDEX))
00964         == (LONG)sizeof(FILEINDEX) ) return(0);
00965 PutErrS:
00966     return(MesPrint("File error"));
00967 }
00968
00969 /*
00970     #] PutInStore :
00971     #[ GetTerm :
00972
00973     Gets one term from input scratch stream.
00974     Puts it in 'term'.
00975     Returns the length of the term.
00976
00977     Used by Processor      (proces.c)
00978         WriteAll           (sch.c)
00979         WriteOne           (sch.c)
00980         GetMoreTerms       (store.c)
00981         ToStorage          (store.c)
00982         CoFillExpression   (comexpr.c)
00983         FactorInExpr       (factor.c)
00984         LoadOpti          (optim.c)
00985         PF_Processor       (parallel.c)
00986         ThreadsProcessor   (threads.c)
00987
00988     In multi thread/processor mode all calls are done by the master.
00989     Note however that other routines, used by the threads, can use
00990     the same file. Hence we need to be careful about SeekFile and locks.
00991 */
00992 WORD GetTerm(PHEAD WORD *term)
00993 {
00994     GETBIDENTITY
00995     WORD *inp, i, j = 0, len;
00996     LONG InIn, *whichInInBuf;
00997     WORD *r, *m, *mstop = 0, minsiz = 0, *bra = 0, *from;
00998     WORD first, *start = 0, testing = 0;
00999     FILEHANDLE *fi;
01000     AN.deferskipped = 0;
01001     if ( AR.GetFile == 2 ) {
01002         fi = AR.hidefile;
01003         whichInInBuf = &(AR.InHiBuf);
01004     }
01005     else {
01006         fi = AR.infile;

```

```

01007         whichInInBuf = &(AR.InInBuf);
01008     }
01009     InIn = *whichInInBuf;
01010     from = term;
01011     if ( AR.KeptInHold ) {
01012         r = AR.CompressBuffer;
01013         i = *r;
01014         AR.KeptInHold = 0;
01015         if ( i <= 0 ) { *term = 0; goto RegRet; }
01016         m = term;
01017         NCOPY(m,r,i);
01018         goto RegRet;
01019     }
01020     if ( AR.DeferFlag ) {
01021         m = AR.CompressBuffer;
01022         if ( *m > 0 ) {
01023             mstop = m + *m;
01024             mstop -= ABS(mstop[-1]);
01025             m++;
01026             while ( m < mstop ) {
01027                 if ( *m == HAAKJE ) {
01028                     testing = 1;
01029                     mstop = m + m[1];
01030                     bra = (WORD *)(((UBYTE *) (term)) + 2*AM.MaxTer);
01031                     m = AR.CompressBuffer+1;
01032                     r = bra;
01033                     while ( m < mstop ) *r++ = *m++;
01034                     mstop = r;
01035                     minsiz = WORDDIF(mstop,bra);
01036                     goto ReStart;
01037                 }
01038                 /* We have the bracket to be tested in bra till mstop
01039                 */
01040             }
01041             m += m[1];
01042         }
01043     }
01044     bra = (WORD *)(((UBYTE *) (term)) + 2*AM.MaxTer);
01045     mstop = bra+1;
01046     *bra = 0;
01047     minsiz = 1;
01048     testing = 1;
01049 }
01050 ReStart:
01051     first = 0;
01052     r = AR.CompressBuffer;
01053     if ( fi->handle >= 0 ) {
01054         if ( InIn <= 0 ) {
01055             ADDPOS(fi->POposition, (fi->POfull-fi->PObuffer)*sizeof(WORD));
01056             LOCK(AS.inputslock);
01057             SeekFile(fi->handle, &(fi->POposition), SEEK_SET);
01058             InIn = ReadFile(fi->handle, (UBYTE *) (fi->PObuffer), fi->POsize);
01059             UNLOCK(AS.inputslock);
01060             if ( ( InIn < 0 ) || ( InIn & 1 ) ) {
01061                 goto GTerr;
01062             }
01063 #ifdef WORD2
01064             InIn >>= 1;
01065 #else
01066             InIn /= TABLESIZE(WORD,UBYTE);
01067 #endif
01068             *whichInInBuf = InIn;
01069             if ( !InIn ) { *r = 0; *from = 0; goto RegRet; }
01070             fi->POfill = fi->PObuffer;
01071             fi->POfull = fi->PObuffer + InIn;
01072         }
01073         inp = fi->POfill;
01074         if ( ( len = i = *inp ) == 0 ) {
01075             (*whichInInBuf)--;
01076             (fi->POfill)++;
01077             *r = 0;
01078             *from = 0;
01079             goto RegRet;
01080         }
01081         if ( i < 0 ) {
01082             InIn--;
01083             inp++;
01084             r++;
01085             start = term;
01086             *term++ = -i + 1;
01087             while ( ++i <= 0 ) *term++ = *r++;
01088             if ( InIn > 0 ) {
01089                 i = *inp++;
01090                 InIn--;
01091                 *start += i;
01092                 *(AR.CompressBuffer) = len = *start;
01093             }

```

```

01094         else {
01095             first = 1;
01096             goto NewIn;
01097         }
01098     }
01099     InIn -= i;
01100     if ( InIn < 0 ) {
01101         j = (WORD) (- InIn);
01102         i -= j;
01103     }
01104     else j = 0;
01105     while ( --i >= 0 ) {
01106         *r++ = *term++ = *inp++;
01107     }
01108     if ( j ) {
01109 NewIn:
01110         ADDPOS(fi->PPosition, (fi->POfull-fi->PObuffer)*sizeof(WORD));
01111         LOCK(AS.inputslock);
01112         SeekFile(fi->handle, &(fi->PPosition), SEEK_SET);
01113         InIn = ReadFile(fi->handle, (UBYTE *) (fi->PObuffer), fi->POsize);
01114         UNLOCK(AS.inputslock);
01115         if ( ( InIn <= 0 ) || ( InIn & 1 ) ) {
01116             goto GTerr;
01117         }
01118 #ifdef WORD2
01119         InIn >= 1;
01120 #else
01121         InIn /= TABLESIZE(WORD, UBYTE);
01122 #endif
01123         inp = fi->PObuffer;
01124         fi->POfull = inp + InIn;
01125
01126         if ( first ) {
01127             j = *inp++;
01128             InIn--;
01129             *start += j;
01130             *(AR.CompressBuffer) = len = *start;
01131         }
01132         InIn -= j;
01133         while ( --j >= 0 ) { *r++ = *term++ = *inp++; }
01134     }
01135     fi->POfill = inp;
01136     *whichInInBuf = InIn;
01137     AR.DefPosition = fi->PPosition;
01138     ADDPOS(AR.DefPosition, ((UBYTE *) (fi->POfill) - (UBYTE *) (fi->PObuffer)));
01139 }
01140 else {
01141     inp = fi->POfill;
01142     if ( inp >= fi->POfull ) { *from = 0; goto RegRet; }
01143     len = j = *inp;
01144     if ( j < 0 ) {
01145         inp++;
01146         *term++ = *r++ = len = - j + 1 + *inp;
01147         while ( ++j <= 0 ) *term++ = *r++;
01148         j = *inp++;
01149     }
01150     else if ( !j ) j = 1;
01151     while ( --j >= 0 ) { *r++ = *term++ = *inp++; }
01152     fi->POfill = inp;
01153 /*%%%ADDED 7-apr-2006 for Keep Brackets in bucket */
01154     SETBASEPOSITION(AR.DefPosition, ((UBYTE *) (fi->POfill) - (UBYTE *) (fi->PObuffer)));
01155     if ( inp > fi->POfull ) {
01156         goto GTerr;
01157     }
01158 }
01159 if ( r >= AR.ComprTop ) {
01160     MesPrint("CompressSize of %10l is insufficient", AM.CompressSize);
01161     Terminate(-1);
01162 }
01163 AR.CompressPointer = r; *r = 0;
01164 /*
01165     The next *from is a bug fix that made the program read in forbidden
01166     territory.
01167 */
01168 if ( testing && *from != 0 ) {
01169     WORD jj;
01170     r = from;
01171     jj = *r - 1 - ABS(*(r+r-1));
01172     if ( jj < minsiz ) goto strip;
01173     r++;
01174     m = bra;
01175     while ( m < mstop ) {
01176         if ( *m != *r ) {
01177 strip:
01178             r = from;
01179             m = r + *r;
01180             mstop = m - ABS(m[-1]);
01181             r++;

```



```

01181         while ( r < mstop ) {
01182             if ( *r == HAAKJE ) {
01183                 *r++ = 1;
01184                 *r++ = 1;
01185                 *r++ = 3;
01186                 len = WORDDIF(r,from);
01187                 *from = len;
01188                 goto RegRet;
01189             }
01190             r += r[1];
01191         }
01192         goto RegRet;
01193     }
01194     m++;
01195     r++;
01196 }
01197 term = from;
01198 AN.deferskipped++;
01199 goto ReStart;
01200 }
01201 RegRet;;
01202 /*
01203     #] debug :
01204 */
01205 {
01206     UBYTE OutBuf[140];
01207     /* if ( AP.DebugFlag ) { */
01208     if ( ( AP.PreDebug & DUMPINTERMS ) == DUMPINTERMS ) {
01209         MLOCK(ErrorMessageLock);
01210         AO.OutFill = AO.OutputLine = OutBuf;
01211         AO.OutSkip = 3;
01212         FiniLine();
01213         r = from;
01214         i = *r;
01215         TokenToLine((UBYTE *) ("Input: "));
01216         if ( i == 0 ) {
01217             TokenToLine((UBYTE *) "zero");
01218         }
01219         else if ( i < 0 ) {
01220             TokenToLine((UBYTE *) "negative!!");
01221         }
01222         else {
01223             while ( --i >= 0 ) {
01224                 TalToLine((UWORD) (*r++)); TokenToLine((UBYTE *) " ");
01225             }
01226         }
01227         FiniLine();
01228         MUNLOCK(ErrorMessageLock);
01229     }
01230 }
01231 /*
01232     #] debug :
01233 */
01234     return(*from);
01235 GTerr:
01236     MesPrint("Error while reading scratch file in GetTerm");
01237     Terminate(-1);
01238     return(-1);
01239 }
01240
01241 /*
01242     #] GetTerm :
01243     #] GetOneTerm :
01244
01245     Gets one term from stream AR.infile->handle.
01246     Puts it in 'term'.
01247     Returns the length of the term.
01248     Input is unbuffered.
01249     Compression via AR.CompressPointer
01250     par is actually in all calls a file handle
01251
01252     Routine is called from
01253         DoOnePow          Get one power of an expression
01254         Deferred          Get the contents of a bracket
01255         GetFirstBracket
01256         FindBracket
01257
01258     We should do something about the lack of buffering.
01259     Maybe a buffer of a few times AM.MaxTer (MaxTermSize*sizeof(WORD)).
01260     Each thread will need its own buffer!
01261
01262     If par == 0 we use ReadPosFile which can fill the whole buffer.
01263     If par == 1 we use ReadFile and do actual read operations.
01264
01265     Note: we cannot use ReadPosFile when running in the master thread.
01266 */
01267 WORD GetOneTerm(PHEAD WORD *term, FILEHANDLE *fi, POSITION *pos, int par)

```

```

01268 {
01269     GETBIDENTITY
01270     WORD i, *p;
01271     LONG j, siz;
01272     WORD *r, *rr = AR.CompressPointer;
01273     int error = 0;
01274     r = rr;
01275     if ( fi->handle >= 0 ) {
01276 #ifdef READONEBYONE
01277 #ifdef WITHPTHREADS
01278 /*
01279     This code needs some investigation.
01280     It may be that we should do this always.
01281     It may be that even for workers it is no good.
01282     We may have to make a variable like AM.ReadDirect with
01283     if ( AM.ReadDirect ) par = 1;
01284     and a user command like
01285     On ReadDirect;
01286 */
01287     if ( AT.identity > 0 ) par = 1;
01288 #endif
01289 #endif
01290 /*
01291     To be changed:
01292     1: check first whether the term lies completely inside the buffer
01293     2: if not a: use old strategy for AT.identity == 0 (master)
01294         b: for workers, position file and read buffer
01295 */
01296     if ( par == 0 ) {
01297         siz = ReadPosFile(BHEAD fi, (UBYTE *)term, 1L, pos);
01298     }
01299     else {
01300         LOCK(AS.inputslock);
01301         SeekFile(fi->handle, pos, SEEK_SET);
01302         siz = ReadFile(fi->handle, (UBYTE *)term, sizeof(WORD));
01303         UNLOCK(AS.inputslock);
01304         ADDPOS(*pos, siz);
01305     }
01306     if ( siz == sizeof(WORD) ) {
01307         p = term;
01308         j = i = *term++;
01309         if ( ( i > AM.MaxTer/((WORD)sizeof(WORD)) ) || ( -i >= AM.MaxTer/((WORD)sizeof(WORD)) ) )
01310         {
01311             error = 1;
01312             goto ErrGet;
01313         }
01314         r++;
01315         if ( i < 0 ) { /* Loading a compressed term */
01316             *p = -i + 1;
01317             while ( ++i <= 0 ) *term++ = *r++;
01318             if ( par == 0 ) {
01319                 siz = ReadPosFile(BHEAD fi, (UBYTE *)term, 1L, pos);
01320             }
01321             else {
01322                 LOCK(AS.inputslock);
01323                 SeekFile(fi->handle, pos, SEEK_SET);
01324                 siz = ReadFile(fi->handle, (UBYTE *)term, sizeof(WORD));
01325                 UNLOCK(AS.inputslock);
01326                 ADDPOS(*pos, sizeof(WORD));
01327             }
01328             if ( siz != sizeof(WORD) ) {
01329                 error = 2;
01330                 goto ErrGet;
01331             }
01332             *p += *term;
01333             j = *term;
01334             if ( ( j > AM.MaxTer/((WORD)sizeof(WORD)) ) || ( j <= 0 ) )
01335             {
01336                 error = 3;
01337                 goto ErrGet;
01338             }
01339             *rr = *p; /* Write the proper term size to *AR.CompressPointer */
01340         }
01341         else { /* Loading a regular term */
01342             if ( !j ) return(0);
01343             *rr = i; /* Write the proper term size to *AR.CompressPointer */
01344             j--;
01345         }
01346         i = (WORD)j;
01347         if ( par == 0 ) {
01348             siz = ReadPosFile(BHEAD fi, (UBYTE *)term, j, pos);
01349             j *= TABLESIZE(WORD, UBYTE);
01350         }
01351         else {
01352             j *= TABLESIZE(WORD, UBYTE);
01353             LOCK(AS.inputslock);
01354             SeekFile(fi->handle, pos, SEEK_SET);

```

```

01355         siz = ReadFile(fi->handle, (UBYTE *)term, j);
01356         UNLOCK(AS.inputslock);
01357         ADDPOS(*pos, j);
01358     }
01359     if ( siz != j ) {
01360         error = 4;
01361         goto ErrGet;
01362     }
01363     while ( --i >= 0 ) *r++ = *term++;
01364     if ( r >= AR.ComprTop ) {
01365         MLOCK(ErrorMessageLock);
01366         MesPrint("CompressSize of %10l is insufficient", AM.CompressSize);
01367         MUNLOCK(ErrorMessageLock);
01368         Terminate(-1);
01369     }
01370     AR.CompressPointer = r; *r = 0;
01371     return(*p);
01372 }
01373 error = 5;
01374 }
01375 else {
01376 /*
01377     Here the whole expression is in the buffer.
01378 */
01379     fi->POfill = (WORD *)((UBYTE *) (fi->PObuffer) + BASEPOSITION(*pos));
01380     p = fi->POfill;
01381     if ( p >= fi->POfull ) { *term = 0; return(0); }
01382     j = i = *p;
01383     if ( i < 0 ) {
01384         p++;
01385         j = *r++ = *term++ = -i + 1 + *p;
01386         while ( ++i <= 0 ) *term++ = *r++;
01387         i = *p++;
01388     }
01389     if ( i == 0 ) { i = 1; *r++ = 0; *term++ = 0; }
01390     else { while ( --i >= 0 ) { *r++ = *term++ = *p++; } }
01391     fi->POfill = p;
01392     SETBASEPOSITION(*pos, (UBYTE *) (fi->POfill) - (UBYTE *) (fi->PObuffer));
01393     if ( p <= fi->POfull ) {
01394         if ( r >= AR.ComprTop ) {
01395             MLOCK(ErrorMessageLock);
01396             MesPrint("CompressSize of %10l is insufficient", AM.CompressSize);
01397             MUNLOCK(ErrorMessageLock);
01398             Terminate(-1);
01399         }
01400         AR.CompressPointer = r; *r = 0;
01401         return((WORD)j);
01402     }
01403     error = 6;
01404 }
01405 ErrGet:
01406     MLOCK(ErrorMessageLock);
01407     MesPrint("Error while reading scratch file in GetOneTerm (%d)", error);
01408     MUNLOCK(ErrorMessageLock);
01409     Terminate(-1);
01410     return(-1);
01411 }
01412
01413 /*
01414     #] GetOneTerm :
01415     #[ GetMoreTerms :
01416     Routine collects more contents of brackets inside a function,
01417     indicated by the number in AC.CollectFun.
01418     The first term is in term already.
01419     We can keep calling GetTerm either till a bracket is finished
01420     or till it would make the term too long (> AM.MaxTer/2)
01421     In all cases this function makes that the routine GetTerm
01422     has a term in 'hold', so the AR.KeptInHold flag must be turned on.
01423 */
01424
01425 WORD GetMoreTerms(WORD *term)
01426 {
01427     GETIDENTITY
01428     WORD *t, *r, *m, *h, *tstop, i, inc, same;
01429     WORD extra;
01430     WORD retval = 0;
01431 /*
01432     We use 23% as a quasi-random default value.
01433 */
01434     extra = ((AM.MaxTer/sizeof(WORD)) * ((LONG)100-AC.CollectPercentage))/100;
01435     if ( extra < 23 ) extra = 23;
01436 /*
01437     First find the bracket pointer
01438 */
01439     t = term + *term;
01440     tstop = t - ABS(t[-1]);
01441     h = term+1;

```

```

01442     while ( *h != HAAKJE && h < tstop ) h += h[1];
01443     if ( h >= tstop ) return(retval);
01444     inc = FUNHEAD+ARGHEAD+1-h[1];
01445     same = WORDDIFF(h,term) + h[1] - 1;
01446     r = m + t + inc;
01447     tstop = h + h[1];
01448     while ( t > tstop ) *--r = *--t;
01449     r--;
01450     *r = WORDDIFF(m,r);
01451     while ( GetTerm(BHEAD m) > 0 ) {
01452         r = m + 1;
01453         t = m + *m - 1;
01454         if ( same > ( i = ( *m - ABS(*t) - 1 ) ) ) { /* Must fail */
01455             if ( AC.AltCollectFun && AS.CollectOverFlag == 2 ) AS.CollectOverFlag = 3;
01456             break;
01457         }
01458         t = term+1;
01459         i = same;
01460         while ( --i >= 0 ) {
01461             if ( *r != *t ) {
01462                 if ( AC.AltCollectFun && AS.CollectOverFlag == 2 ) AS.CollectOverFlag = 3;
01463                 goto FullTerm;
01464             }
01465             r++; t++;
01466         }
01467         if ( ( WORDDIFF(m,term) + i + extra ) > (WORD)(AM.MaxTer/sizeof(WORD)) ) {
01468             /* 23 = 3 +20. The 20 is to have some extra for substitutions or whatever */
01469             if ( AS.CollectOverFlag == 0 && AC.AltCollectFun == 0 ) {
01470                 Warning("Bracket contents too long in Collect statement");
01471                 Warning("Contents spread over more than one term");
01472                 Warning("If possible: increase MaxTermSize in setfile");
01473                 AS.CollectOverFlag = 1;
01474             }
01475             else if ( AC.AltCollectFun ) {
01476                 AS.CollectOverFlag = 2;
01477             }
01478             break;
01479         }
01480         tstop = m + *m;
01481         *m -= same;
01482         m++;
01483         while ( r < tstop ) *m++ = *r++;
01484         retval++;
01485         if ( extra == 23 ) extra = ((AM.MaxTer/sizeof(WORD))/6);
01486     }
01487 FullTerm:
01488     h[1] = WORDDIFF(m,h);
01489     if ( AS.CollectOverFlag > 1 ) {
01490         *h = AC.AltCollectFun;
01491         if ( AS.CollectOverFlag == 3 ) AS.CollectOverFlag = 1;
01492     }
01493     else *h = AC.CollectFun;
01494     h[2] |= DIRTYFLAG;
01495     h[FUNHEAD] = h[1] - FUNHEAD;
01496     h[FUNHEAD+1] = 0;
01497     if ( ToFast(h+FUNHEAD,h+FUNHEAD) ) {
01498         if ( h[FUNHEAD] <= -FUNCTION ) {
01499             h[1] = FUNHEAD+1;
01500             m = h + FUNHEAD+1;
01501         }
01502         else {
01503             h[1] = FUNHEAD+2;
01504             m = h + FUNHEAD+2;
01505         }
01506     }
01507     *m++ = 1;
01508     *m++ = 1;
01509     *m++ = 3;
01510     *term = WORDDIFF(m,term);
01511     AR.KeptInHold = 1;
01512     return(retval);
01513 }
01514
01515 /*
01516     #] GetMoreTerms :
01517     #[ GetMoreFromMem :
01518
01519 */
01520
01521 int GetMoreFromMem(WORD *term, WORD **tpoin)
01522 {
01523     GETIDENTITY
01524     WORD *t, *r, *m, *h, *tstop, i, j, inc, same;
01525     LONG extra = 23;
01526 /*
01527     First find the bracket pointer
01528 */

```

```

01529     t = term + *term;
01530     tstop = t - ABS(t[-1]);
01531     h = term+1;
01532     while ( *h != HAAKJE && h < tstop ) h += h[1];
01533     if ( h >= tstop ) return(0);
01534     inc = FUNHEAD+ARGHEAD+1-h[1];
01535     same = WORDDIF(h,term) + h[1] - 1;
01536     r = m = t + inc;
01537     tstop = h + h[1];
01538     while ( t > tstop ) *--r = *--t;
01539     r--;
01540     *r = WORDDIF(m,r);
01541     while ( **tpoin ) {
01542         r = *tpoin; j = *r;
01543         for ( i = 0; i < j; i++ ) m[i] = *r++;
01544         *tpoin = r;
01545         r = m + 1;
01546         t = m + *m - 1;
01547         if ( same > ( i = ( *m - ABS(*t) - 1 ) ) ) { /* Must fail */
01548             if ( AC.AltCollectFun && AS.CollectOverFlag == 2 ) AS.CollectOverFlag = 3;
01549             break;
01550         }
01551         t = term+1;
01552         i = same;
01553         while ( --i >= 0 ) {
01554             if ( *r != *t ) {
01555                 if ( AC.AltCollectFun && AS.CollectOverFlag == 2 ) AS.CollectOverFlag = 3;
01556                 goto FullTerm;
01557             }
01558             r++; t++;
01559         }
01560         if ( ( WORDDIF(m,term) + i + extra ) > (LONG)(AM.MaxTer/(2*sizeof(WORD))) ) {
01561             /* 23 = 3 +20. The 20 is to have some extra for substitutions or whatever */
01562             if ( AS.CollectOverFlag == 0 && AC.AltCollectFun == 0 ) {
01563                 Warning("Bracket contents too long in Collect statement");
01564                 Warning("Contents spread over more than one term");
01565                 Warning("If possible: increase MaxTermSize in setfile");
01566                 AS.CollectOverFlag = 1;
01567             }
01568             else if ( AC.AltCollectFun ) {
01569                 AS.CollectOverFlag = 2;
01570             }
01571             break;
01572         }
01573         tstop = m + *m;
01574         *m -= same;
01575         m++;
01576         while ( r < tstop ) *m++ = *r++;
01577         if ( extra == 23 ) extra = ((AM.MaxTer/sizeof(WORD))/6);
01578     }
01579 FullTerm:
01580     h[1] = WORDDIF(m,h);
01581     if ( AS.CollectOverFlag > 1 ) {
01582         *h = AC.AltCollectFun;
01583         if ( AS.CollectOverFlag == 3 ) AS.CollectOverFlag = 1;
01584     }
01585     else *h = AC.CollectFun;
01586     h[2] |= DIRTYFLAG;
01587     h[FUNHEAD] = h[1] - FUNHEAD;
01588     h[FUNHEAD+1] = 0;
01589     if ( ToFast(h+FUNHEAD,h+FUNHEAD) ) {
01590         if ( h[FUNHEAD] <= -FUNCTION ) {
01591             h[1] = FUNHEAD+1;
01592             m = h + FUNHEAD+1;
01593         }
01594         else {
01595             h[1] = FUNHEAD+2;
01596             m = h + FUNHEAD+2;
01597         }
01598     }
01599     *m++ = 1;
01600     *m++ = 1;
01601     *m++ = 3;
01602     *term = WORDDIF(m,term);
01603     AR.KeptInHold = 1;
01604     return(0);
01605 }
01606
01607 /*
01608     #] GetMoreFromMem :
01609     #[ GetFromStore :
01610
01611     Gets a single term from the storage file at position and puts
01612     it at 'to'.
01613     The value to be returned is the number of words read.
01614     Renumbering is done also.
01615     This is controlled by the renumber table, given in 'renumber'

```

```

01616
01617     This routine should work with a number of cache buffers. The
01618     exact number should be definable in form.set.
01619     The parameters are:
01620     AM.SizeStoreCache    (4096)
01621     The numbers are the proposed default values.
01622
01623     The cache is a pure read cache.
01624 */
01625
01626 static int gfs = 0;
01627
01628 WORD GetFromStore(WORD *to, POSITION *position, RENUMBER renumber, WORD *InCompState, WORD nexpr)
01629 {
01630     GETIDENTITY
01631     LONG RetCode, num, first = 0;
01632     WORD *from, *m;
01633     struct StOrEcAcHe sc;
01634     STORECACHE s;
01635     STORECACHE snext, sold;
01636     WORD *r, *rr = AR.CompressPointer;
01637     r = rr;
01638     gfs++;
01639     sc.next = AT.StoreCache;
01640     sold = s = &sc;
01641     snext = s->next;
01642     while ( snext ) {
01643         sold = s;
01644         s = snext;
01645         snext = s->next;
01646         if ( BASEPOSITION(s->position) == -1 ) break;
01647         if ( ISLESSPOS(*position,s->toppos) &&
01648             ISGEPOS(*position,s->position) ) { /* Hit */
01649             if ( AT.StoreCache != s ) {
01650                 sold->next = s->next;
01651                 s->next = AT.StoreCache->next;
01652                 AT.StoreCache = s;
01653             }
01654             from = (WORD *) ((UBYTE *) (s->buffer)) + DIFBASE(*position,s->position));
01655             num = *from;
01656             if ( !num ) { return(*to = 0); }
01657             *InCompState = (WORD)num;
01658             m = to;
01659             if ( num < 0 ) {
01660                 from++;
01661                 ADDPOS(*position,sizeof(WORD));
01662                 *m++ = (WORD) (-num+1);
01663                 r++;
01664                 while ( ++num <= 0 ) *m++ = *r++;
01665                 if ( ISLESSPOS(*position,s->toppos) ) {
01666                     num = *from++;
01667                     *to += (WORD)num;
01668                     ADDPOS(*position,sizeof(WORD));
01669                     *InCompState = (WORD) (num + 2);
01670                 }
01671                 else {
01672                     first = 1;
01673                     goto InNew;
01674                 }
01675             }
01676             PastCon:;
01677             while ( num > 0 && ISLESSPOS(*position,s->toppos) ) {
01678                 *r++ = *m++ = *from++; ADDPOS(*position,sizeof(WORD)); num--;
01679             }
01680             if ( num > 0 ) {
01681 InNew:
01682                 SETBASEPOSITION(s->position,-1);
01683                 SETBASEPOSITION(s->toppos,-1);
01684                 LOCK(AM.storefilelock);
01685                 SeekFile(AR.StoreData.Handle,position,SEEK_SET);
01686                 RetCode = ReadFile(AR.StoreData.Handle,(UBYTE *) (s->buffer),AM.SizeStoreCache);
01687                 UNLOCK(AM.storefilelock);
01688                 if ( RetCode < 0 ) goto PastErr;
01689                 if ( !RetCode ) return(*to = 0 );
01690                 s->position = *position;
01691                 s->toppos = *position;
01692                 ADDPOS(s->toppos,RetCode);
01693                 from = s->buffer;
01694                 if ( first ) {
01695                     num = *from++;
01696                     ADDPOS(*position,sizeof(WORD));
01697                     *to += (WORD)num;
01698                     /* This next line has always been commented, but uncommenting it
01699                     fixes a rare bug when loading certain save files. */
01700                     first = 0;
01701                     *InCompState = (WORD) (num + 2);
01702                 }

```

```

01703         goto PastCon;
01704     }
01705     goto PastEnd;
01706 }
01707 }
01708 if ( AT.StoreCache ) { /* Fill the last buffer */
01709     s->position = *position;
01710     LOCK(AM.storefilelock);
01711     SeekFile(AR.StoreData.Handle,position,SEEK_SET);
01712     RetCode = ReadFile(AR.StoreData.Handle,(UBYTE *) (s->buffer),AM.SizeStoreCache);
01713     UNLOCK(AM.storefilelock);
01714     if ( RetCode < 0 ) goto PastErr;
01715     if ( !RetCode ) return( *to = 0 );
01716     s->toppos = *position;
01717     ADDPOS(s->toppos,RetCode);
01718     if ( AT.StoreCache != s ) {
01719         sold->next = s->next;
01720         s->next = AT.StoreCache->next;
01721         AT.StoreCache = s;
01722     }
01723     m = to;
01724     from = s->buffer;
01725     num = *from;
01726     if ( !num ) { return( *to = 0 ); }
01727     *InCompState = (WORD)num;
01728     if ( num < 0 ) {
01729         *m++ = (WORD) (-num+1);
01730         r++;
01731         from++;
01732         ADDPOS(*position,sizeof(WORD));
01733         while ( ++num <= 0 ) *m++ = *r++;
01734         num = *from++;
01735         *to += (WORD)num;
01736         ADDPOS(*position,sizeof(WORD));
01737         *InCompState = (WORD) (num+2);
01738     }
01739     goto PastCon;
01740 }
01741 /* No caching available */
01742 LOCK(AM.storefilelock);
01743 SeekFile(AR.StoreData.Handle,position,SEEK_SET);
01744 RetCode = ReadFile(AR.StoreData.Handle,(UBYTE *)to,(LONG)sizeof(WORD));
01745 SeekFile(AR.StoreData.Handle,position,SEEK_CUR);
01746 UNLOCK(AM.storefilelock);
01747 if ( RetCode != sizeof(WORD) ) {
01748     *to = 0;
01749     return( (WORD) RetCode);
01750 }
01751 if ( !*to ) return(0);
01752 m = to;
01753 if ( *to < 0 ) {
01754     num = *m++;
01755     *to = *r++ = (WORD) (-num + 1);
01756     while ( ++num <= 0 ) *m++ = *r++;
01757     LOCK(AM.storefilelock);
01758     SeekFile(AR.StoreData.Handle,position,SEEK_SET);
01759     RetCode = ReadFile(AR.StoreData.Handle,(UBYTE *)m,(LONG)sizeof(WORD));
01760     SeekFile(AR.StoreData.Handle,position,SEEK_CUR);
01761     UNLOCK(AM.storefilelock);
01762     if ( RetCode != sizeof(WORD) ) {
01763         MLOCK(ErrorMessageLock);
01764         MesPrint("@Error in compression of store file");
01765         MUNLOCK(ErrorMessageLock);
01766         return(-1);
01767     }
01768     num = *m;
01769     *to += (WORD)num;
01770     *InCompState = (WORD) (num + 2);
01771 }
01772 else {
01773     *InCompState = *to;
01774     num = *to - 1; m = to + 1; r = rr + 1;
01775 }
01776 first = num;
01777 num *= wsizeof(WORD);
01778 if ( num < 0 ) {
01779     MLOCK(ErrorMessageLock);
01780     MesPrint("@Error in stored expressions file at position %9p",position);
01781     MUNLOCK(ErrorMessageLock);
01782     return(-1);
01783 }
01784 LOCK(AM.storefilelock);
01785 SeekFile(AR.StoreData.Handle,position,SEEK_SET);
01786 RetCode = ReadFile(AR.StoreData.Handle,(UBYTE *)m,num);
01787 SeekFile(AR.StoreData.Handle,position,SEEK_CUR);
01788 UNLOCK(AM.storefilelock);
01789 if ( RetCode != num ) {

```

```

01790         MLOCK(ErrorMessageLock);
01791         MesPrint("@Error in stored expressions file at position %9p",position);
01792         MUNLOCK(ErrorMessageLock);
01793         return(-1);
01794     }
01795     NCOPY(r,m,first);
01796 PastEnd:
01797     *rr = *to;
01798     if ( r >= AR.ComprTop ) {
01799         MLOCK(ErrorMessageLock);
01800         MesPrint("CompressSize of %10l is insufficient",AM.CompressSize);
01801         MUNLOCK(ErrorMessageLock);
01802         Terminate(-1);
01803     }
01804     AR.CompressPointer = r; *r = 0;
01805     if ( !TermRenumber(to,renumber,nexpr) ) {
01806         MarkDirty(to,DIRTYSYMFLAG);
01807         if ( AR.CurDum > AM.IndDum && Expressions[nexpr].numdummies > 0 )
01808             MoveDummies(BHEAD to,AR.CurDum - AM.IndDum);
01809         return((WORD)*to);
01810     }
01811 PastErr:
01812     MLOCK(ErrorMessageLock);
01813     MesCall("GetFromStore");
01814     MUNLOCK(ErrorMessageLock);
01815     SETERROR(-1)
01816 }
01817
01818 /*
01819     #] GetFromStore :
01820     #[ DetVars :          void DetVars(term)
01821
01822     Determines which variables are used in term.
01823
01824     When par = 1 we are scanning a prototype expression which involves
01825     completely different rules.
01826
01827 */
01828
01829 void DetVars(WORD *term, WORD par)
01830 {
01831     GETIDENTITY
01832     WORD *stopper;
01833     WORD *t, sym;
01834     WORD *sarg;
01835     stopper = term + *term - 1;
01836     stopper = stopper - ABS(*stopper) + 1;
01837     term++;
01838     if ( par ) {          /* Prototype expression */
01839         WORD n;
01840         if ( ( n = NumSymbols ) > 0 ) {
01841             SYMBOLS tt;
01842             tt = symbols;
01843             do {
01844                 (tt++)->flags &= ~INUSE;
01845             } while ( --n > 0 );
01846         }
01847         if ( ( n = NumIndices ) > 0 ) {
01848             INDICES tt;
01849             tt = indices;
01850             do {
01851                 (tt++)->flags &= ~INUSE;
01852             } while ( --n > 0 );
01853         }
01854         if ( ( n = NumVectors ) > 0 ) {
01855             VECTORS tt;
01856             tt = vectors;
01857             do {
01858                 (tt++)->flags &= ~INUSE;
01859             } while ( --n > 0 );
01860         }
01861         if ( ( n = NumFunctions ) > 0 ) {
01862             FUNCTIONS tt;
01863             tt = functions;
01864             do {
01865                 (tt++)->flags &= ~INUSE;
01866             } while ( --n > 0 );
01867         }
01868         term += SUBEXPSIZE;
01869         while ( term < stopper ) {
01870             if ( *term == SYMTOSYM || *term == SYMTONUM ) {
01871                 term += 2;
01872                 AN.UsedSymbol[*term] = 1;
01873                 symbols[*term].flags |= INUSE;
01874             }
01875             else if ( *term == VECTOVEC ) {
01876                 term += 2;

```



```

01877         AN.UsedVector[*term-AM.OffsetVector] = 1;
01878         vectors[*term-AM.OffsetVector].flags |= INUSE;
01879     }
01880     else if ( *term == INDTOIND ) {
01881         term += 2;
01882         sym = indices[*term - AM.OffsetIndex].dimension;
01883         if ( sym < 0 ) AN.UsedSymbol[-sym] = 1;
01884         AN.UsedIndex[*term - AM.OffsetIndex] = 1;
01885         sym = indices[*term-AM.OffsetIndex].nmin4;
01886         if ( sym < -NMIN4SHIFT ) AN.UsedSymbol[-sym-NMIN4SHIFT] = 1;
01887         indices[*term-AM.OffsetIndex].flags |= INUSE;
01888     }
01889     else if ( *term == FUNTOFUN ) {
01890         term += 2;
01891         AN.UsedFunction[*term-FUNCTION] = 1;
01892         functions[*term-FUNCTION].flags |= INUSE;
01893     }
01894     term += 2;
01895 }
01896 }
01897 else {
01898     while ( term < stopper ) {
01899         t = term + term[1];
01900         if ( *term == SYMBOL ) {
01901             term += 2;
01902             do {
01903                 AN.UsedSymbol[*term] = 1;
01904                 term += 2;
01905             } while ( term < t );
01906         }
01907         else if ( *term == DOTPRODUCT ) {
01908             term += 2;
01909             do {
01910                 AN.UsedVector[(+term++) - AM.OffsetVector] = 1;
01911                 AN.UsedVector[(+term) - AM.OffsetVector] = 1;
01912                 term += 2;
01913             } while ( term < t );
01914         }
01915         else if ( *term == VECTOR ) {
01916             term += 2;
01917             do {
01918                 AN.UsedVector[(+term++) - AM.OffsetVector] = 1;
01919                 if ( *term >= AM.OffsetIndex && *term < AM.DumInd ) {
01920                     sym = indices[*term - AM.OffsetIndex].dimension;
01921                     if ( sym < 0 ) AN.UsedSymbol[-sym] = 1;
01922                     AN.UsedIndex[*term - AM.OffsetIndex] = 1;
01923                     sym = indices[(+term++)-AM.OffsetIndex].nmin4;
01924                     if ( sym < -NMIN4SHIFT ) AN.UsedSymbol[-sym-NMIN4SHIFT] = 1;
01925                 }
01926                 else term++;
01927             } while ( term < t );
01928         }
01929         else if ( *term == INDEX || *term == LEVICIVITA || *term == GAMMA
01930                 || *term == DELTA ) {
01931             /*
01932             Tensors:
01933             */
01934             term += 2;
01935             if ( *term == INDEX || *term == DELTA ) term += 2;
01936             else {
01937                 Tensors:
01938                 term += FUNHEAD;
01939             }
01940             while ( term < t ) {
01941                 if ( *term >= AM.OffsetIndex && *term < AM.DumInd ) {
01942                     sym = indices[*term - AM.OffsetIndex].dimension;
01943                     if ( sym < 0 ) AN.UsedSymbol[-sym] = 1;
01944                     AN.UsedIndex[*term - AM.OffsetIndex] = 1;
01945                     sym = indices[*term-AM.OffsetIndex].nmin4;
01946                     if ( sym < -NMIN4SHIFT ) AN.UsedSymbol[-sym-NMIN4SHIFT] = 1;
01947                 }
01948                 else if ( *term < (WILDOFFSET+AM.OffsetVector) )
01949                     AN.UsedVector[(+term) - AM.OffsetVector] = 1;
01950                 term++;
01951             }
01952         }
01953         else if ( *term == HAAKJE ) term = t;
01954         else {
01955             if ( *term > MAXBUILTINFUNCTION )
01956                 AN.UsedFunction[(+term)-FUNCTION] = 1;
01957             if ( *term >= FUNCTION && functions[*term-FUNCTION].spec
01958                 >= TENSORFUNCTION && term[1] > FUNHEAD ) goto Tensors;
01959             term += FUNHEAD;
01960             /* First argument */
01961             while ( term < t ) {
01962                 sarg = term;
01963                 NEXTARG(sarg)
01964                 if ( *term > 0 ) {

```

```

01964         sarg = term + *term;      /* End of argument */
01965         term += ARGHEAD;           /* First term in argument */
01966         if ( term < sarg ) { do {
01967             DetVars(term,par);
01968             term += *term;
01969         } while ( term < sarg ); }
01970     }
01971     else {
01972         if ( *term < -MAXBUILTINFUNCTION ) {
01973             AN.UsedFunction[-*term-FUNCTION] = 1;
01974         }
01975         else if ( *term == -SYMBOL ) {
01976             AN.UsedSymbol[term[1]] = 1;
01977         }
01978         else if ( *term == -INDEX ) {
01979             if ( term[1] < (WILDOFFSET+AM.OffsetVector) ) {
01980                 AN.UsedVector[term[1]-AM.OffsetVector] = 1;
01981             }
01982             else if ( term[1] >= AM.OffsetIndex && term[1] < AM.DumInd ) {
01983                 sym = indices[term[1] - AM.OffsetIndex].dimension;
01984                 if ( sym < 0 ) AN.UsedSymbol[-sym] = 1;
01985                 AN.UsedIndex[term[1] - AM.OffsetIndex] = 1;
01986                 sym = indices[term[1]-AM.OffsetIndex].nmin4;
01987                 if ( sym < -NMIN4SHIFT ) AN.UsedSymbol[-sym-NMIN4SHIFT] = 1;
01988             }
01989         }
01990         else if ( *term == -VECTOR || *term == -MINVECTOR ) {
01991             AN.UsedVector[term[1]-AM.OffsetVector] = 1;
01992         }
01993     }
01994     term = sarg;      /* Next argument */
01995     term = t;
01996 }
01997 }
01998 }
01999 }
02000 }
02001
02002 /*
02003     #] DetVars :
02004     #[ ToStorage :
02005
02006     This routine takes an expression in the scratch buffer (indicated by e)
02007     and puts it in the storage file. The necessary actions are:
02008
02009     1: determine the list of the used variables.
02010     2: make an index entry.
02011     3: write the namelists.
02012     4: copy the 'length' bytes of the expression.
02013
02014 */
02015
02016 int ToStorage(EXPRESSIONS e, POSITION *length)
02017 {
02018     GETIDENTITY
02019     WORD *w, i, j;
02020     WORD *term;
02021     INDEXENTRY *indexent;
02022     LONG size;
02023     POSITION indexpos, scrpos;
02024     FILEHANDLE *f;
02025     if ( ( indexent = NextFileIndex(&indexpos) ) == 0 ) {
02026         MesCall("ToStorage");
02027         SETERROR(-1)
02028     }
02029     indexent->CompressSize = 0;      /* thus far no compression */
02030     f = AR.infile; AR.infile = AR.outfile; AR.outfile = f;
02031     if ( e->status == HIDDENEXPRESSION ) {
02032         AR.InHiBuf = 0; f = AR.hidefile; AR.GetFile = 2;
02033     }
02034     else {
02035         AR.InInBuf = 0; f = AR.infile; AR.GetFile = 0;
02036     }
02037     if ( f->handle >= 0 ) {
02038         scrpos = e->onfile;
02039         SeekFile(f->handle,&scrpos,SEEK_SET);
02040         if ( ! ISNOTEQUALPOS(scrpos,e->onfile) ) {
02041             MesPrint(":::Error in Scratch file");
02042             goto ErrReturn;
02043         }
02044         f->POposition = e->onfile;
02045         f->POfull = f->PObuffer;
02046         if ( e->status == HIDDENEXPRESSION ) AR.InHiBuf = 0;
02047         else AR.InInBuf = 0;
02048     }
02049     else {
02050         f->POfill = (WORD *) ((UBYTE *) (f->PObuffer)+BASEPOSITION(e->onfile));

```

```

02051     }
02052     w = AT.WorkPointer;
02053     AN.UsedSymbol = w;    w += NumSymbols;
02054     AN.UsedVector = w;    w += NumVectors;
02055     AN.UsedIndex = w;    w += NumIndices;
02056     AN.UsedFunction = w; w += NumFunctions;
02057     term = w;
02058     w = (WORD *)(((UBYTE *) (w)) + AM.MaxTer);
02059     if ( w > AT.WorkTop ) {
02060         MesWork();
02061         goto ErrReturn;
02062     }
02063     w = AN.UsedSymbol;
02064     i = NumSymbols + NumVectors + NumIndices + NumFunctions;
02065     do { *w++ = 0; } while ( --i > 0 );
02066     if ( GetTerm(BHEAD term) > 0 ) {
02067         DetVars(term,1);
02068         if ( GetTerm(BHEAD term) ) {
02069             do { DetVars(term,0); } while ( GetTerm(BHEAD term) > 0 );
02070         }
02071     }
02072     j = 0;
02073     w = AN.UsedSymbol;
02074     i = NumSymbols;
02075     while ( --i >= 0 ) { if ( *w++ ) j++; }
02076     indexent->nsymbols = j;
02077     /* size = j * sizeof(struct SyMbOl); */
02078     j = 0;
02079     w = AN.UsedIndex;
02080     i = NumIndices;
02081     while ( --i >= 0 ) { if ( *w++ ) j++; }
02082     indexent->nindices = j;
02083     /* size += j * sizeof(struct InDeX); */
02084     j = 0;
02085     w = AN.UsedVector;
02086     i = NumVectors;
02087     while ( --i >= 0 ) { if ( *w++ ) j++; }
02088     indexent->nvectors = j;
02089     /* size += j * sizeof(struct VeCtOr); */
02090     j = 0;
02091     w = AN.UsedFunction;
02092     i = NumFunctions;
02093     while ( --i >= 0 ) { if ( *w++ ) j++; }
02094     indexent->nfunctions = j;
02095     /* size += j * sizeof(struct FuNcTiOn); */
02096     indexent->length = *length;
02097     indexent->variables = AR.StoreData.Fill;
02098     /* indexent->position = AR.StoreData.Fill + size; */
02099     StrCopy(AC.exprnames->namebuffer+e->name, (UBYTE *) (indexent->name));
02100     SeekFile(AR.StoreData.Handle,&(AR.StoreData.Fill),SEEK_SET);
02101     AO.wlen = 100000;
02102     AO.wpos = (UBYTE *) Malloc1(AO.wlen,"AO.wpos buffer");
02103     AO.wpoin = AO.wpos;
02104     {
02105         SYMBOLS a;
02106         w = AN.UsedSymbol;
02107         a = symbols;
02108         j = 0;
02109         i = indexent->nsymbols;
02110         while ( --i >= 0 ) {
02111             while ( !*w ) { w++; a++; j++; }
02112             a->number = j;
02113             if ( VarStore((UBYTE *) a, (WORD) (sizeof(struct SyMbOl)), a->name,
02114                 a->namesize) ) goto ErrToSto;
02115             w++; j++; a++;
02116         }
02117     }
02118     {
02119         INDICES a;
02120         w = AN.UsedIndex;
02121         a = indices;
02122         j = 0;
02123         i = indexent->nindices;
02124         while ( --i >= 0 ) {
02125             while ( !*w ) { w++; a++; j++; }
02126             a->number = j;
02127             if ( VarStore((UBYTE *) a, (WORD) (sizeof(struct InDeX)), a->name,
02128                 a->namesize) ) goto ErrToSto;
02129             w++; j++; a++;
02130         }
02131     }
02132     {
02133         VECTORS a;
02134         w = AN.UsedVector;
02135         a = vectors;
02136         j = 0;
02137         i = indexent->nvectors;

```

```

02138         while ( --i >= 0 ) {
02139             while ( !*w ) { w++; a++; j++; }
02140             a->number = j;
02141             if ( VarStore((UBYTE *)a, (WORD) (sizeof(struct VeCtOr)), a->name,
02142                 a->namesize) ) goto ErrToSto;
02143             w++; j++; a++;
02144         }
02145     }
02146     {
02147         FUNCTIONS a;
02148         w = AN.UsedFunction;
02149         a = functions;
02150         j = 0;
02151         i = indexent->nfunctions;
02152         while ( --i >= 0 ) {
02153             while ( !*w ) { w++; a++; j++; }
02154             a->number = j;
02155             if ( VarStore((UBYTE *)a, (WORD) (sizeof(struct FuNcTiOn)), a->name,
02156                 a->namesize) ) goto ErrToSto;
02157             w++; a++; j++;
02158         }
02159     }
02160     if ( VarStore((UBYTE *)0L, (WORD)0, (WORD)0, (WORD)0) ) goto ErrToSto; /* Flush buffer */
02161     TELLFILE (AR.StoreData.Handle, &(indexent->position));
02162     indexent->size = (WORD)DIFBASE(indexent->position, indexent->variables);
02163 /*
02164     The following code was added when it became apparent (30-jan-2007)
02165     that we need provisions for extra space without upsetting existing
02166     .sav files. Here we can put as much as we want.
02167     Look in GetTable on how to recover numdummies.
02168     Forgetting numdummies has been in there from the beginning.
02169 */
02170     if ( WriteFile(AR.StoreData.Handle, (UBYTE *) (&(e->numdummies)), (LONG)sizeof(WORD)) !=
02171         sizeof(WORD) ) {
02172         MesPrint("Error while writing storage file");
02173         goto ErrReturn;
02174     }
02175     if ( WriteFile(AR.StoreData.Handle, (UBYTE *) (&(e->numfactors)), (LONG)sizeof(WORD)) !=
02176         sizeof(WORD) ) {
02177         MesPrint("Error while writing storage file");
02178         goto ErrReturn;
02179     }
02180     if ( WriteFile(AR.StoreData.Handle, (UBYTE *) (&(e->vflags)), (LONG)sizeof(WORD)) !=
02181         sizeof(WORD) ) {
02182         MesPrint("Error while writing storage file");
02183         goto ErrReturn;
02184     }
02185     if ( WriteFile(AR.StoreData.Handle, (UBYTE *) (&(e->uflags)), (LONG)sizeof(WORD)) !=
02186         sizeof(WORD) ) {
02187         MesPrint("Error while writing storage file");
02188         goto ErrReturn;
02189     }
02190     TELLFILE (AR.StoreData.Handle, &(indexent->position));
02191     if ( f->handle >= 0 ) {
02192         POSITION llength;
02193         llength = *length;
02194         SeekFile(f->handle, &(e->onfile), SEEK_SET);
02195         while ( ISPOSPOS(llength) ) {
02196             SETBASEPOSITION(scrpos, AO.wlen);
02197             if ( ISLESSPOS(llength, scrpos) ) size = BASEPOSITION(llength);
02198             else size = AO.wlen;
02199             if ( ReadFile(f->handle, AO.wpos, size) != size ) {
02200                 MesPrint("Error while reading scratch file");
02201                 goto ErrReturn;
02202             }
02203             if ( WriteFile(AR.StoreData.Handle, AO.wpos, size) != size ) {
02204                 MesPrint("Error while writing storage file");
02205                 goto ErrReturn;
02206             }
02207             ADDPOS(llength, -size);
02208         }
02209     }
02210     else {
02211         WORD *ppp;
02212         ppp = (WORD *) ((UBYTE *) (f->PObuffer) + BASEPOSITION(e->onfile));
02213         if ( WriteFile(AR.StoreData.Handle, (UBYTE *) ppp, BASEPOSITION(*length)) !=
02214             BASEPOSITION(*length) ) {
02215             MesPrint("Error while writing storage file");
02216             goto ErrReturn;
02217         }
02218     }
02219     ADD2POS(*length, indexent->position);
02220     e->onfile = indexpos;
02221 /*
02222     AR.StoreData.Fill = SeekFile(AR.StoreData.Handle, &(AM.zeropos), SEEK_END);
02223 */
02224     AR.StoreData.Fill = *length;

```

```

02225     SeekFile (AR.StoreData.Handle, &(AR.StoreData.Fill), SEEK_SET);
02226     scrpos = AR.StoreData.Position;
02227     ADDPOS (scrpos, sizeof(POSITION));
02228     SeekFile (AR.StoreData.Handle, &scrpos, SEEK_SET);
02229     if ( WriteFile (AR.StoreData.Handle, ((UBYTE *) &(AR.StoreData.Index.number))
02230     , (LONG) (sizeof(POSITION))) != sizeof(POSITION) ) goto ErrInSto;
02231     SeekFile (AR.StoreData.Handle, &indexpos, SEEK_SET);
02232     if ( WriteFile (AR.StoreData.Handle, (UBYTE *) indexent, (LONG) (sizeof(INDEXENTRY))) !=
02233     sizeof(INDEXENTRY) ) goto ErrInSto;
02234     FlushFile (AR.StoreData.Handle);
02235     SeekFile (AR.StoreData.Handle, &(AC.StoreFileSize), SEEK_END);
02236     f = AR.infile; AR.infile = AR.outfile; AR.outfile = f;
02237     if ( AO.wpos ) M_free (AO.wpos, "AO.wpos buffer");
02238     AO.wpos = AO.wpoin = 0;
02239     return (0);
02240 ErrToSto:
02241     MesPrint ("---Error while storing namelists");
02242     goto ErrReturn;
02243 ErrInSto:
02244     MesPrint ("Error in storage");
02245 ErrReturn:
02246     if ( AO.wpos ) M_free (AO.wpos, "AO.wpos buffer");
02247     AO.wpos = AO.wpoin = 0;
02248     f = AR.infile; AR.infile = AR.outfile; AR.outfile = f;
02249     return (-1);
02250 }
02251
02252 /*
02253     #] ToStorage :
02254     #[ NextFileIndex :
02255 */
02256 INDEXENTRY *NextFileIndex (POSITION *indexpos)
02257 {
02258     GETIDENTITY
02259     INDEXENTRY *ind;
02260     int i, j = sizeof(FILEINDEX) / (sizeof(LONG));
02261     LONG *lo;
02262     if ( AR.StoreData.Handle <= 0 ) {
02263         if ( SetFileIndex() ) {
02264             MesCall ("NextFileIndex");
02265             return (0);
02266         }
02267     }
02268     SETBASEPOSITION (AR.StoreData.Index.number, 1);
02269 #ifdef SYSDEPENDENTSAVE
02270     SETBASEPOSITION (*indexpos, (2*sizeof(POSITION)));
02271 #else
02272     SETBASEPOSITION (*indexpos, (2*sizeof(POSITION)+sizeof(STOREHEADER)));
02273 #endif
02274     return (AR.StoreData.Index.expression);
02275 }
02276 while ( BASEPOSITION (AR.StoreData.Index.number) >= (LONG) (INFILEINDEX) ) {
02277     if ( ISNOTZEROPOS (AR.StoreData.Index.next) ) {
02278         SeekFile (AR.StoreData.Handle, &(AR.StoreData.Index.next), SEEK_SET);
02279         AR.StoreData.Position = AR.StoreData.Index.next;
02280         if ( ReadFile (AR.StoreData.Handle, (UBYTE
02281 *) (&AR.StoreData.Index), (LONG) (sizeof(FILEINDEX))) !=
02282         (LONG) (sizeof(FILEINDEX)) ) goto ErrNextS;
02283     }
02284     else {
02285         PUTZERO (AR.StoreData.Index.number);
02286         SeekFile (AR.StoreData.Handle, &(AR.StoreData.Position), SEEK_SET);
02287         if ( WriteFile (AR.StoreData.Handle, (UBYTE
02288 *) (&(AR.StoreData.Fill)), (LONG) (sizeof(POSITION)))
02289         != (LONG) (sizeof(POSITION)) ) goto ErrNextS;
02290         PUTZERO (AR.StoreData.Index.next);
02291         SeekFile (AR.StoreData.Handle, &(AR.StoreData.Fill), SEEK_SET);
02292         AR.StoreData.Position = AR.StoreData.Fill;
02293         lo = (LONG *) (&AR.StoreData.Index);
02294         for ( i = 0; i < j; i++ ) *lo++ = 0;
02295         if ( WriteFile (AR.StoreData.Handle, (UBYTE
02296 *) (&AR.StoreData.Index), (LONG) (sizeof(FILEINDEX))) !=
02297         (LONG) (sizeof(FILEINDEX)) ) goto ErrNextS;
02298         ADDPOS (AR.StoreData.Fill, sizeof(FILEINDEX));
02299     }
02300 }
02301 *indexpos = AR.StoreData.Position;
02302 ADDPOS (*indexpos, (2*sizeof(POSITION)) +
02303     BASEPOSITION (AR.StoreData.Index.number) * sizeof(INDEXENTRY));
02304 ind = &AR.StoreData.Index.expression[BASEPOSITION (AR.StoreData.Index.number)];
02305 ADDPOS (AR.StoreData.Index.number, 1);
02306 return (ind);
02307 ErrNextS:
02308 MesPrint ("Error in storage file");
02309 return (0);
02310 }
02311 }
02312 }

```

```

02309 /*
02310      #] NextFileIndex :
02311      #[ SetFileIndex :
02312 */
02313
02320 int SetFileIndex(void)
02321 {
02322     GETIDENTITY
02323     int i, j = sizeof(FILEINDEX) / (sizeof(LONG));
02324     LONG *lo;
02325     if ( AR.StoreData.Handle < 0 ) {
02326         AR.StoreData.Handle = AC.StoreHandle;
02327         PUTZERO(AR.StoreData.Index.next);
02328         PUTZERO(AR.StoreData.Index.number);
02329 #ifdef SYSDEPENDENTSAVE
02330         SETBASEPOSITION(AR.StoreData.Fill, sizeof(FILEINDEX));
02331 #else
02332         if ( WriteStoreHeader(AR.StoreData.Handle) ) return(MesPrint("Error writing storage file
header"));
02333         SETBASEPOSITION(AR.StoreData.Fill, (LONG)sizeof(FILEINDEX)+(LONG)sizeof(STOREHEADER));
02334 #endif
02335         lo = (LONG *)(&AR.StoreData.Index);
02336         for ( i = 0; i < j; i++ ) *lo++ = 0;
02337         if ( WriteFile(AR.StoreData.Handle, (UBYTE *)(&AR.StoreData.Index), (LONG)(sizeof(FILEINDEX)))
!=
02338             (LONG)(sizeof(FILEINDEX)) ) return(MesPrint("Error writing storage file"));
02339     }
02340     else {
02341         POSITION scrpos;
02342 #ifdef SYSDEPENDENTSAVE
02343         PUTZERO(scrpos);
02344 #else
02345         SETBASEPOSITION(scrpos, (LONG)(sizeof(STOREHEADER)));
02346 #endif
02347         SeekFile(AR.StoreData.Handle, &scrpos, SEEK_SET);
02348         if ( ReadFile(AR.StoreData.Handle, (UBYTE *)(&AR.StoreData.Index), (LONG)(sizeof(FILEINDEX))) !=
02349             (LONG)(sizeof(FILEINDEX)) ) return(MesPrint("Error reading storage file"));
02350     }
02351 #ifdef SYSDEPENDENTSAVE
02352     PUTZERO(AR.StoreData.Position);
02353 #else
02354     SETBASEPOSITION(AR.StoreData.Position, (LONG)(sizeof(STOREHEADER)));
02355 #endif
02356     return(0);
02357 }
02358
02359 /*
02360      #] SetFileIndex :
02361      #[ VarStore :
02362
02363      The n -= sizeof(WORD); makes that the real length comes in the
02364      padding space, provided there is padding space (it seems so).
02365      The reading of the information assumes this is the case and hence
02366      things work....
02367 */
02368
02369 int VarStore(UBYTE *s, WORD n, WORD name, WORD namesize)
02370 {
02371     GETIDENTITY
02372     UBYTE *t, *u;
02373     if ( s ) {
02374         n -= sizeof(WORD);
02375         t = (UBYTE *)AO.wpos;
02376     /*
02377         u = (UBYTE *)AT.WorkTop;
02378     */
02379         u = AO.wpos+AO.wlen;
02380         while ( n > 0 && t < u ) { *t++ = *s++; n--; }
02381         while ( t >= u ) {
02382             if ( WriteFile(AR.StoreData.Handle, AO.wpos, AO.wlen) != AO.wlen ) return(-1);
02383             t = AO.wpos;
02384             while ( n > 0 && t < u ) { *t++ = *s++; n--; }
02385         }
02386         s = AC.varnames->namebuffer + name;
02387         n = namesize;
02388         n += sizeof(void *)-1; n &= -(sizeof(void *));
02389         *((WORD *)t) = n;
02390         t += sizeof(WORD);
02391         while ( n > 0 && t < u ) {
02392             if ( namesize > 0 ) { *t++ = *s++; namesize--; }
02393             else { *t++ = 0; }
02394             n--;
02395         }
02396         while ( t >= u ) {
02397             if ( WriteFile(AR.StoreData.Handle, AO.wpos, AO.wlen) != AO.wlen ) return(-1);
02398             t = AO.wpos;
02399             while ( n > 0 && t < u ) {

```

```

02400         if ( namesize > 0 ) { *t++ = *s++; namesize--; }
02401         else { *t++ = 0; }
02402         n--;
02403     }
02404 }
02405 AO.wpoin = t;
02406 }
02407 else {
02408     LONG size;
02409     size = AO.wpoin - AO.wpos;
02410     if ( WriteFile(AR.StoreData.Handle,AO.wpos,size) != size ) return(-1);
02411     AO.wpoin = AO.wpos;
02412 }
02413 return(0);
02414 }
02415
02416 /*
02417     #] VarStore :
02418     #[ TermRenumber :
02419
02420     rennumbers the variables inside term according to the information
02421     in struct renumber.
02422     The search is binary. This avoided having to read/write the
02423     expression twice when it was stored.
02424 */
02425 */
02426
02427 int TermRenumber(WORD *term, RENUMBER renumber, WORD nexpr)
02428 {
02429     WORD *stopper;
02430     WORD *t, *sarg, n;
02431     stopper = term + *term - 1;
02432     stopper = stopper - ABS(*stopper) + 1;
02433     term++;
02434     while ( term < stopper ) {
02435         if ( *term == SYMBOL ) {
02436             t = term + term[1];
02437             term += 2;
02438             do {
02439                 if ( ( n = FindrNumber(*term,&(renumber->symp)) ) < 0 ) goto ErrR;
02440                 *term = renumber->sympnum[n];
02441                 term += 2;
02442             } while ( term < t );
02443         }
02444         else if ( *term == DOTPRODUCT ) {
02445             t = term + term[1];
02446             term += 2;
02447             do {
02448                 if ( ( n = FindrNumber(*term,&(renumber->vect)) ) < 0 ) goto ErrR;
02449                 *term++ = renumber->vecnum[n];
02450                 if ( ( n = FindrNumber(*term,&(renumber->vect)) ) < 0 ) goto ErrR;
02451                 *term = renumber->vecnum[n];
02452                 term += 2;
02453             } while ( term < t );
02454         }
02455         else if ( *term == VECTOR ) {
02456             t = term + term[1];
02457             term += 2;
02458             do {
02459                 if ( ( n = FindrNumber(*term,&(renumber->vect)) ) < 0 ) goto ErrR;
02460                 *term++ = renumber->vecnum[n];
02461                 if ( ( *term >= AM.OffsetIndex ) && ( *term < AM.IndDum ) ) {
02462                     if ( ( n = FindrNumber(*term,&(renumber->indi)) ) < 0 ) goto ErrR;
02463                     *term++ = renumber->indnum[n];
02464                 }
02465                 else term++;
02466             } while ( term < t );
02467         }
02468         else if ( *term == INDEX || *term == LEVICIVITA || *term == GAMMA
02469                 || *term == DELTA ) {
02470             Tensors:
02471             t = term + term[1];
02472             if ( *term == INDEX || *term == DELTA ) term += 2;
02473             else term += FUNHEAD;
02474             /*
02475             term += 2;
02476             */
02477             while ( term < t ) {
02478                 if ( *term >= AM.OffsetIndex + WILDOFFSET ) {
02479                     /*
02480                     Still TOBEDONE
02481                     */
02482                 }
02483             }
02484         }
02485     }
02486 }

```

```

02494         else if ( ( *term >= AM.OffsetIndex ) && ( *term < AM.IndDum ) ) {
02495             if ( ( n = FindrNumber(*term,&(renumber->indi)) )
02496                 < 0 ) goto ErrR;
02497             *term = renumber->indnum[n];
02498         }
02499         else if ( *term < (WILDOffset+AM.OffsetVector) ) {
02500             if ( ( n = FindrNumber(*term,&(renumber->vect)) )
02501                 < 0 ) goto ErrR;
02502             *term = renumber->vecnum[n];
02503         }
02504         term++;
02505     }
02506 }
02507 else if ( *term == HAAKJE ) term += term[1];
02508 else {
02509     if ( *term > MAXBUILTINFUNCTION ) {
02510         if ( ( n = FindrNumber(*term,&(renumber->func)) )
02511             < 0 ) goto ErrR;
02512         *term = renumber->funnum[n];
02513     }
02514     if ( *term >= FUNCTION && functions[*term-FUNCTION].spec
02515         >= TENSORFUNCTION && term[1] > FUNHEAD ) goto Tensors;
02516     t = term + term[1];          /* General stopper */
02517     term += FUNHEAD;            /* First argument */
02518     while ( term < t ) {
02519         sarg = term;
02520         NEXTARG(sarg)
02521         if ( *term > 0 ) {
02522             /*
02523              Problem here:
02524              Marking the argument as dirty attacks the heap
02525              very heavily and costs much computer time.
02526             */
02527             ++term = 1;
02528             term += ARGHEAD-1;
02529             while ( term < sarg ) {
02530                 if ( TermRenumber(term,renumber,nexpr) ) goto ErrR;
02531                 term += *term;
02532             }
02533         }
02534         else {
02535             if ( *term <= -MAXBUILTINFUNCTION ) {
02536                 if ( ( n = FindrNumber(*term,&(renumber->func)) )
02537                     < 0 ) goto ErrR;
02538                 *term = -renumber->funnum[n];
02539             }
02540             else if ( *term == -SYMBOL ) {
02541                 term++;
02542                 if ( ( n = FindrNumber(*term,
02543                     &(renumber->symb)) ) < 0 ) goto ErrR;
02544                 *term = renumber->symnum[n];
02545             }
02546             else if ( *term == -INDEX ) {
02547                 term++;
02548                 if ( *term >= AM.OffsetIndex + WILDOffset ) {
02549                     /*
02550                     Still TOBEDONE
02551                     */
02552                 }
02553                 else if ( ( *term >= AM.OffsetIndex ) && ( *term < AM.IndDum ) ) {
02554                     if ( ( n = FindrNumber(*term,&(renumber->indi)) )
02555                         < 0 ) goto ErrR;
02556                     *term = renumber->indnum[n];
02557                 }
02558                 else if ( *term < (WILDOffset+AM.OffsetVector) ) {
02559                     if ( ( n = FindrNumber(*term,&(renumber->vect)) )
02560                         < 0 ) goto ErrR;
02561                     *term = renumber->vecnum[n];
02562                 }
02563             }
02564             else if ( *term == -VECTOR || *term == -MINVECTOR ) {
02565                 term++;
02566                 if ( ( n = FindrNumber(*term,&(renumber->vect)) )
02567                     < 0 ) goto ErrR;
02568                 *term = renumber->vecnum[n];
02569             }
02570         }
02571         term = sarg;          /* Next argument */
02572     }
02573     term = t;
02574 }
02575 }
02576 return(0);
02577 ErrR:
02578     MesCall("TermRenumber");
02579     SETERROR(-1)
02580 }

```



```

02581
02582 /*
02583     #] TermRenumber :
02584     #[ FindrNumber :
02585 */
02586
02587 WORD FindrNumber(WORD n, VARRENUM *v)
02588 {
02589     WORD *hi,*med,*lo;
02590     hi = v->hi;
02591     lo = v->lo;
02592     med = v->start;
02593     if ( *hi == 0 ) {
02594         if ( n != *hi ) {
02595             MesPrint("Serious problems coming up in FindrNumber");
02596             return(-1);
02597         }
02598         return(*hi);
02599     }
02600     while ( *med != n ) {
02601         if ( *med < n ) {
02602             if ( med == hi ) goto ErrFindr;
02603             lo = med;
02604             med = hi - ((WORDDIFF(hi,med))/2);
02605         }
02606         else {
02607             if ( med == lo ) goto ErrFindr;
02608             hi = med;
02609             med = lo + ((WORDDIFF(med,lo))/2);
02610         }
02611     }
02612     return(WORDDIFF(med,v->lo));
02613 ErrFindr:
02614 /*
02615     Reconstruction:
02616 */
02617     {
02618         int i;
02619         i = WORDDIFF(v->hi,v->lo);
02620         MesPrint("FindrNumber: n = %d, list has %d members",n,i);
02621         while ( i >= 0 ) {
02622             MesPrint("v->lo[%d] = %d",i,v->lo[i]); i--;
02623         }
02624         hi = v->hi;
02625         lo = v->lo;
02626         med = v->start;
02627         MesPrint("Start with %d,%d,%d",0,WORDDIFF(med,v->lo),WORDDIFF(hi,v->lo));
02628         while ( *med != n ) {
02629             if ( *med < n ) {
02630                 if ( med == hi ) goto ErrFindr2;
02631                 lo = med;
02632                 med = hi - ((WORDDIFF(hi,med))/2);
02633             }
02634             else {
02635                 if ( med == lo ) goto ErrFindr2;
02636                 hi = med;
02637                 med = ((WORDDIFF(med,lo))/2) + lo;
02638             }
02639             MesPrint("New: %d,%d,%d, *med = %d",WORDDIFF(lo,v->lo),WORDDIFF(med,v->lo),WORDDIFF(hi,v->lo),*med);
02640         }
02641     }
02642     return(WORDDIFF(med,v->lo));
02643 ErrFindr2:
02644     return(MesPrint("Renumbering problems"));
02645 }
02646
02647 /*
02648     #] FindrNumber :
02649     #[ FindInIndex :
02650
02651     Finds an expression in the storage index if it exists.
02652     If found it returns a pointer to the index entry, otherwise zero.
02653     par = 0     Search by address (--> f == &AR.StoreData, called by GetTable, CoSave )
02654     par = 1     Search by name (--> f == &AO.SaveData, called by CoLoad )
02655
02656     When comparing parameter fields the parameters of the expression
02657     to be searched are in AT.TMaddr. This includes the primary expression
02658     and a possible FROMBRAC information. The FROMBRAC is always last.
02659
02660     The parameter mode tells whether we should worry about arguments of
02661     a stored expression.
02662 */
02663
02664 INDEXENTRY *FindInIndex(WORD expr, FILEDATA *f, WORD par, WORD mode)
02665 {
02666     GETIDENTITY

```

```

02667     INDEXENTRY *ind;
02668     WORD i, hand, *m;
02669     WORD *start, *stop, *stop2, *m2, nomatch = 0;
02670     POSITION stindex, indexpos, scrpos;
02671     LONG number, num;
02672     stindex = f->Position;
02673     m = AT.TMaddr;
02674     stop = m + m[1];
02675     m += SUBEXPSIZE;
02676     start = m;
02677     while ( m < stop ) {
02678         if ( *m == FROMBRAC || *m == WILDCARDS ) break;
02679         m += m[1];
02680     }
02681     stop = m;
02682     if ( !par ) hand = AR.StoreData.Handle;
02683     else hand = AO.SaveData.Handle;
02684     for(;;) {
02685         if ( ( i = (WORD)BASEPOSITION(f->Index.number) ) != 0 ) {
02686             indexpos = f->Position;
02687             ADDPOS(indexpos, (2*sizeof(POSITION)));
02688             ind = f->Index.expression;
02689             do {
02690                 if ( ( !par && ISEQUALPOS(indexpos, Expressions[expr].onfile) )
02691                     || ( par && !StrCmp(EXPRNAME(expr), (UBYTE *) (ind->name)) ) ) {
02692                     nomatch = 1;
02693                     /*
02694                     MesPrint("index: position: %8p", &(ind->position));
02695                     MesPrint("index: length: %8p", &(ind->length));
02696                     MesPrint("index: variables: %8p", &(ind->variables));
02697                     MesPrint("index: nsymbols: %d", ind->nsymbols);
02698                     MesPrint("index: nindices: %d", ind->nindices);
02699                     MesPrint("index: nvectors: %d", ind->nvectors);
02700                     MesPrint("index: nfunctions: %d", ind->nfunctions);
02701                     MesPrint("index: size: %d", ind->size);
02702                     */
02703                     if ( par ) return(ind);
02704                     scrpos = ind->position;
02705                     SeekFile(hand, &scrpos, SEEK_SET);
02706                     if ( ISNOTEQUALPOS(scrpos, ind->position) ) goto ErrGt2;
02707                     if ( ReadFile(hand, (UBYTE *)AT.WorkPointer, (LONG)sizeof(WORD)) !=
02708                         sizeof(WORD) || !*AT.WorkPointer ) goto ErrGt2;
02709                     num = *AT.WorkPointer - 1;
02710                     num *= wsizeof(WORD);
02711                     if ( *AT.WorkPointer < 0 ||
02712                         ReadFile(hand, (UBYTE *) (AT.WorkPointer+1), num) != num ) goto ErrGt2;
02713                     m = start; /* start of parameter field to be searched */
02714                     m2 = AT.WorkPointer + 1;
02715                     stop2 = m2 + m2[1];
02716                     m2 += SUBEXPSIZE;
02717                     while ( m < stop && m2 < stop2 ) {
02718                         if ( *m == SYMBOL ) {
02719                             if ( *m2 != SYMTOSYM ) break;
02720                             m2[3] = m[2];
02721                         }
02722                         else if ( *m == INDEX ) {
02723                             if ( m[2] >= 0 ) {
02724                                 if ( *m2 != INDTOIND ) break;
02725                             }
02726                             else {
02727                                 if ( *m2 != VECTOVEC ) break;
02728                             }
02729                             m2[3] = m[2];
02730                         }
02731                         else if ( *m >= FUNCTION ) {
02732                             if ( *m2 != FUNTOFUN ) break;
02733                             m2[3] = *m;
02734                         }
02735                         else {}
02736                         m += m[1];
02737                         m2 += m2[1];
02738                     }
02739                     if ( ( m >= stop && m2 >= stop2 ) || mode == 0 ) {
02740                         AT.WorkPointer = stop2;
02741                         return(ind);
02742                     }
02743                 }
02744             }
02745             ind++;
02746             ADDPOS(indexpos, sizeof(INDEXENTRY));
02747         } while ( --i > 0 );
02748     }
02749     f->Position = f->Index.next;
02750 #ifndef SYSDEPENDENTSAVE
02751     if ( !ISNOTZEROPOS(f->Position) ) ADDPOS(f->Position, sizeof(STOREHEADER));
02752     number = sizeof(struct FileInDeX);
02753 #endif

```

```

02754         if ( ISEQUALPOS(f->Position, stindex) && !AO.bufferedInd ) goto ErrGetTab;
02755         if ( !par ) {
02756             SeekFile(AR.StoreData.Handle, &(f->Position), SEEK_SET);
02757             if ( ISNOTEQUALPOS(f->Position, AR.StoreData.Position) ) goto ErrGt2;
02758 #ifndef SYSDEPENDENTSAVE
02759             if ( ReadFile(f->Handle, (UBYTE *)(&(f->Index)), number) != number ) goto ErrGt2;
02760 #endif
02761         }
02762         else {
02763             SeekFile(AO.SaveData.Handle, &(f->Position), SEEK_SET);
02764             if ( ISNOTEQUALPOS(f->Position, AO.SaveData.Position) ) goto ErrGt2;
02765 #ifndef SYSDEPENDENTSAVE
02766             if ( ReadSaveIndex(&(f->Index)) ) goto ErrGt2;
02767 #endif
02768         }
02769 #ifdef SYSDEPENDENTSAVE
02770         number = sizeof(struct FileInDeX);
02771         if ( ReadFile(f->Handle, (UBYTE *)(&(f->Index)), number) !=
02772             number ) goto ErrGt2;
02773 #endif
02774     }
02775 ErrGetTab:
02776     if ( nomatch ) {
02777         MesPrint("Parameters of expression %s don't match."
02778             , EXPRNAME(expr));
02779     }
02780     else {
02781         MesPrint("Cannot find expression %s", EXPRNAME(expr));
02782     }
02783     return(0);
02784 ErrGt2:
02785     MesPrint("Readerror in IndexSearch");
02786     return(0);
02787 }
02788
02789 /*
02790     #] FindInIndex :
02791     #[ GetTable :
02792
02793     Locates stored files and constructs the renumbering tables.
02794     They are allocated in the Workspace.
02795     First the expression data are located. The Index is treated
02796     as a circularly linked buffer which is paged forwardly.
02797     If the indexentry is located (in ind) the two renumber tables
02798     have to be constructed.
02799     Finally the prototype has to be put in the proper buffer, so
02800     that wildcards can be passed. There should be a test with
02801     an already existing prototype that is constructed by the
02802     pattern matcher. This has not been put in yet.
02803
02804     There is a problem with the parallel processing.
02805     Feeding in the variables that were erased by a .store could in
02806     principle happen in different orders (ParFORM) or simultaneously
02807     (TFORM). The proper resolution is to have the compiler call GetTable
02808     when a stored expression is encountered.
02809
02810     This has been mended in development of TFORM by reading the
02811     symbol tables during compilation. See the call to GetTable
02812     in the CodeGenerator.
02813
02814     Next is the problem of FindInIndex which writes in AR.StoreData
02815     Copying this is expensive!
02816
02817     This Doesn't work well for TFORM yet.!!!!!!!
02818     e[x1,x2] versus e[x2,x1] messes up.
02819     For the rest is the reloading during execution not thread safe.
02820
02821     The parameter mode tells whether we should worry about arguments
02822     of a stored expression.
02823 */
02824
02825 RENUMBER GetTable(WORD expr, POSITION *position, WORD mode)
02826 {
02827     GETIDENTITY
02828     WORD i, j;
02829     WORD *w;
02830     RENUMBER r;
02831     LONG num, nsize, xx;
02832     WORD jsym, jind, jvec, jfun;
02833     WORD k, type, error = 0, *oldw, *neww, *oldwork = AT.WorkPointer;
02834     struct SyMbOl SyM;
02835     struct InDeX InD;
02836     struct VeCtOr VeC;
02837     struct FuNcTiOn FuN;
02838     INDEXENTRY *ind;
02839 /*
02840     Prepare for FindInIndex to put the prototype in the Workspace.

```

```

02841     oldw will point at the "wildcards"
02842  */
02843  /*
02844       Bug fix. Look also in Generator.
02845  #ifndef WITHPTHREADS
02846
02847       if ( ( r = Expressions[expr].renum ) != 0 ) { }
02848       else {
02849           Expressions[expr].renum =
02850           r = (RENUMBER)Mallocl(sizeof(struct ReNuMbEr), "ReNumber");
02851       }
02852  #else
02853       r = (RENUMBER)Mallocl(sizeof(struct ReNuMbEr), "ReNumber");
02854  #endif
02855  */
02856       r = (RENUMBER)Mallocl(sizeof(struct ReNuMbEr), "ReNumber");
02857
02858     oldw = AT.WorkPointer + 1 + SUBEXPSIZE;
02859  /*
02860     The prototype is loaded in the Workspace by the Index routine.
02861     After all it has to find an occurrence with the proper arguments.
02862     This sets the WorkPointer. Hence be careful now.
02863  */
02864     LOCK(AM.storefilelock);
02865     if ( ( ind = FindInIndex(expr, &AR.StoreData, 0, mode) ) == 0 ) {
02866         UNLOCK(AM.storefilelock);
02867         return(0);
02868     }
02869
02870     xx = ind->nsymbols+ind->nindices+ind->nvectors+ind->nfunctions;
02871     if ( xx == 0 ) {
02872         Expressions[expr].renumlists =
02873         w = AN.dummyrenumlist;
02874     }
02875     else {
02876  /*
02877  #ifndef WITHPTHREADS
02878         Expressions[expr].renumlists =
02879  #endif
02880  */
02881         w = (WORD *)Mallocl(sizeof(WORD)*(xx*2), "VarSpace");
02882     }
02883     r->symb.lo = w;
02884     r->symb.start = w + ind->nsymbols/2;
02885     w += ind->nsymbols;
02886     r->symb.hi = w - 1;
02887     r->symnum = w;
02888     w += ind->nsymbols;
02889
02890     r->indi.lo = w;
02891     r->indi.start = w + ind->nindices/2;
02892     w += ind->nindices;
02893     r->indi.hi = w - 1;
02894     r->indnum = w;
02895     w += ind->nindices;
02896
02897     r->vect.lo = w;
02898     r->vect.start = w + ind->nvectors/2;
02899     w += ind->nvectors;
02900     r->vect.hi = w - 1;
02901     r->vecnum = w;
02902     w += ind->nvectors;
02903
02904     r->func.lo = w;
02905     r->func.start = w + ind->nfunctions/2;
02906     w += ind->nfunctions;
02907     r->func.hi = w - 1;
02908     r->funnum = w;
02909  /* w += ind->nfunctions; */
02910
02911     SeekFile(AR.StoreData.Handle, &(ind->variables), SEEK_SET);
02912     *position = ind->position;
02913     jsym = ind->nsymbols;
02914     jvec = ind->nvectors;
02915     jind = ind->nindices;
02916     jfun = ind->nfunctions;
02917  /*
02918         #[ Symbols :
02919  */
02920     {
02921         SYMBOLS s = &SyM;
02922         w = r->symb.lo; j = jsym;
02923         for ( i = 0; i < j; i++ ) {
02924             if ( ReadFile(AR.StoreData.Handle, (UBYTE *)s, (LONG)(sizeof(struct SyMbOl)))
02925                 != sizeof(struct SyMbOl) ) goto ErrGt2;
02926             nsize = s->namesize; nsize += sizeof(void *)-1;
02927             nsize &= -sizeof(void *);

```

```

02928     if ( ReadFile(AR.StoreData.Handle, (UBYTE *) (AT.WorkPointer), nsize)
02929         != nsize ) goto ErrGt2;
02930     *w = s->number;
02931     if ( ( s->flags & INUSE ) != 0 ) {
02932         /* Find the replacement. It must exist! */
02933         neww = oldw;
02934         while ( *neww != SYMTOSYM || neww[2] != *w ) neww += neww[1];
02935         k = neww[3];
02936     }
02937     else if ( GetVar((UBYTE *) AT.WorkPointer, &type, &k, ALLVARIABLES, NOAUTO) != NAMENOTFOUND ) {
02938         if ( type != CSYMBOL ) {
02939             MesPrint("Error: Conflicting types for %s", (AT.WorkPointer));
02940             error = -1;
02941         }
02942         else {
02943             if ( ( s->complex & (VARTYPEIMAGINARY|VARTYPECOMPLEX) ) !=
02944                 ( symbols[k].complex & (VARTYPEIMAGINARY|VARTYPECOMPLEX) ) ) {
02945                 MesPrint("Warning: Conflicting complexity for %s", AT.WorkPointer);
02946                 error = -1;
02947             }
02948             if ( ( s->complex & (VARTYPEROOTOFUNITY) ) !=
02949                 ( symbols[k].complex & (VARTYPEROOTOFUNITY) ) ) {
02950                 MesPrint("Warning: Conflicting root of unity properties for %s", AT.WorkPointer);
02951                 error = -1;
02952             }
02953             if ( ( s->complex & VARTYPEROOTOFUNITY ) == VARTYPEROOTOFUNITY ) {
02954                 if ( s->maxpower != symbols[k].maxpower ) {
02955                     MesPrint("Warning: Conflicting n in n-th root of unity properties for
02956 %s", AT.WorkPointer);
02957                     error = -1;
02958                 }
02959                 else if ( ( s->minpower !=
02960 symbols[k].minpower || s->maxpower !=
02961 symbols[k].maxpower ) && AC.WarnFlag ) {
02962                     MesPrint("Warning: Conflicting power restrictions for %s", AT.WorkPointer);
02963                 }
02964             }
02965         }
02966     }
02967     else {
02968         if ( ( k = EntVar(CSYMBOL, (UBYTE *) (AT.WorkPointer), s->complex, s->minpower,
02969 s->maxpower, s->dimension) ) < 0 ) goto GetTcall;
02970     }
02971     * (w+j) = k;
02972     w++;
02973 }
02974 /*
02975     #] Symbols :
02976     #[ Indices :
02977 */
02978 {
02979     INDICES s = &InD;
02980     w = r->indi.lo; j = jind;
02981     for ( i = 0; i < j; i++ ) {
02982         if ( ReadFile(AR.StoreData.Handle, (UBYTE *) s, (LONG) (sizeof(struct InDeX)))
02983             != sizeof(struct InDeX) ) goto ErrGt2;
02984         nsize = s->namesize; nsize += sizeof(void *)-1;
02985         nsize &= -sizeof(void *);
02986         if ( ReadFile(AR.StoreData.Handle, (UBYTE *) (AT.WorkPointer), nsize)
02987             != nsize ) goto ErrGt2;
02988         *w = s->number + AM.OffsetIndex;
02989         if ( s->dimension < 0 ) { /* Relabel the dimension */
02990             s->dimension = -r->symnum[FindrNumber(-s->dimension, &(r->symb))];
02991             if ( s->nmin4 < -NMIN4SHIFT ) { /* Relabel n-4 */
02992                 s->nmin4 = -r->symnum[FindrNumber(-s->nmin4-NMIN4SHIFT
02993 , &(r->symb))]-NMIN4SHIFT;
02994             }
02995         }
02996         if ( ( s->flags & INUSE ) != 0 ) {
02997             /* Find the replacement. It must exist! */
02998             neww = oldw;
02999             while ( *neww != INDTOIND || neww[2] != *w ) neww += neww[1];
03000             k = neww[3] - AM.OffsetIndex;
03001         }
03002         else if ( s->type == DUMMY ) {
03003             /*
03004             ----->         Here we may have to execute some renumbering
03005             */
03006         }
03007         else if ( GetVar((UBYTE *) (AT.WorkPointer), &type, &k, ALLVARIABLES, NOAUTO) != NAMENOTFOUND ) {
03008             if ( type != CINDEX ) {
03009                 MesPrint("Error: Conflicting types for %s", (AT.WorkPointer));
03010                 error = -1;
03011             }
03012             else {
03013                 if ( s->type !=

```

```

03014         indices[k].type ) {
03015             MesPrint("Warning: %s is also a dummy index", (AT.WorkPointer));
03016             error = -1;
03017             goto GetTb3;
03018         }
03019         if ( s->dimension != indices[k].dimension ) {
03020             MesPrint("Warning: Conflicting dimensions for %s", (AT.WorkPointer));
03021             error = -1;
03022         }
03023     }
03024 }
03025 else {
03026 GetTb3:
03027     if ( ( k = EntVar(CINDEX, (UBYTE *) (AT.WorkPointer),
03028         s->dimension, 0, s->nmin4, 0) ) < 0 ) goto GetTcall;
03029 }
03030 * (w+j) = k + AM.OffsetIndex;
03031 w++;
03032 }
03033 }
03034 }
03035 /*
03036     #] Indices :
03037     #[ Vectors :
03038 */
03039 {
03040     VECTORS s = &Vec;
03041     w = r->vect.lo; j = jvec;
03042     for ( i = 0; i < j; i++ ) {
03043         if ( ReadFile (AR.StoreData.Handle, (UBYTE *)s, (LONG) (sizeof(struct VecTOr)))
03044             != sizeof(struct VecTOr) ) goto ErrGt2;
03045         nsize = s->namesize; nsize += sizeof(void *)-1;
03046         nsize &= -sizeof(void *);
03047         if ( ReadFile (AR.StoreData.Handle, (UBYTE *) (AT.WorkPointer), nsize)
03048             != nsize ) goto ErrGt2;
03049         *w = s->number + AM.OffsetVector;
03050         if ( ( s->flags & INUSE ) != 0 ) {
03051             /* Find the replacement. It must exist! */
03052             neww = oldw;
03053             while ( *neww != VECTOVEC || neww[2] != *w ) neww += neww[1];
03054             k = neww[3] - AM.OffsetVector;
03055         }
03056         else if ( GetVar((UBYTE *) (AT.WorkPointer), &type, &k, ALLVARIABLES, NOAUTO) != NAMENOTFOUND ) {
03057             if ( type != CVECTOR ) {
03058                 MesPrint("Error: Conflicting types for %s", (AT.WorkPointer));
03059                 error = -1;
03060             }
03061             else {
03062                 if ( ( s->complex & (VARTYPEIMAGINARY|VARTYPECOMPLEX) ) !=
03063                     ( vectors[k].complex & (VARTYPEIMAGINARY|VARTYPECOMPLEX) ) ) {
03064                     MesPrint("Warning: Conflicting complexity for %s", (AT.WorkPointer));
03065                     error = -1;
03066                 }
03067             }
03068         }
03069         else {
03070             if ( ( k = EntVar(CVECTOR, (UBYTE *) (AT.WorkPointer),
03071                 s->complex, 0, 0, s->dimension) ) < 0 ) goto GetTcall;
03072         }
03073         * (w+j) = k + AM.OffsetVector;
03074         w++;
03075     }
03076 }
03077 /*
03078     #] Vectors :
03079     #[ Functions :
03080 */
03081 {
03082     FUNCTIONS s = &FuN;
03083     w = r->func.lo; j = jfun;
03084     for ( i = 0; i < j; i++ ) {
03085         if ( ReadFile (AR.StoreData.Handle, (UBYTE *)s, (LONG) (sizeof(struct FuNcTiOn)))
03086             != sizeof(struct FuNcTiOn) ) goto ErrGt2;
03087         nsize = s->namesize; nsize += sizeof(void *)-1;
03088         nsize &= -sizeof(void *);
03089         if ( ReadFile (AR.StoreData.Handle, (UBYTE *) (AT.WorkPointer), nsize)
03090             != nsize ) goto ErrGt2;
03091         *w = s->number + FUNCTION;
03092         if ( ( s->flags & INUSE ) != 0 ) {
03093             /* Find the replacement. It must exist! */
03094             neww = oldw;
03095             while ( *neww != FUNTOFUN || neww[2] != *w ) neww += neww[1];
03096             k = neww[3] - FUNCTION;
03097         }
03098         else if ( GetVar((UBYTE *) (AT.WorkPointer), &type, &k, ALLVARIABLES, NOAUTO) != NAMENOTFOUND ) {
03099             if ( type != CFUNCTION ) {
03100                 MesPrint("Error: Conflicting types for %s", (AT.WorkPointer));

```

```

03101         error = -1;
03102     }
03103     else {
03104         if ( s->complex != functions[k].complex ) {
03105             MesPrint("Warning: Conflicting complexity for %s", (AT.WorkPointer));
03106             error = -1;
03107         }
03108         else if ( s->symmetric != functions[k].symmetric ) {
03109             MesPrint("Warning: Conflicting symmetry properties for %s", (AT.WorkPointer));
03110             error = -1;
03111         }
03112         else if ( ( s->maxnumargs != functions[k].maxnumargs )
03113             || ( s->minnumargs != functions[k].minnumargs ) ) {
03114             MesPrint("Warning: Conflicting argument restriction properties for
03115 %s", (AT.WorkPointer));
03116             error = -1;
03117         }
03118     }
03119     else {
03120         if ( ( k = EntVar(CFUNCTION, (UBYTE *) (AT.WorkPointer),
03121             s->complex, s->commute, s->spec, s->dimension) ) < 0 ) goto GetTcall;
03122         functions[k].symmetric = s->symmetric;
03123         functions[k].maxnumargs = s->maxnumargs;
03124         functions[k].minnumargs = s->minnumargs;
03125     }
03126     *(w+j) = k + FUNCTION;
03127     w++;
03128 }
03129 }
03130 /*
03131     #] Functions :
03132
03133     Now we skip the prototype. This sets the start position at the first term
03134 */
03135 if ( error ) {
03136     UNLOCK(AM.storefilelock);
03137     AT.WorkPointer = oldwork;
03138     return(0);
03139 }
03140 {
03141     /*
03142         For clarity we look where we are.
03143         We want to know: is this position already known?
03144         Could we have inserted extra information here?
03145
03146         nummystery indicates extra words. We have currently in order
03147         (if they exist)
03148             numdummies
03149             numfactors
03150             vflags
03151             uflags
03152     */
03153     POSITION pos;
03154     int nummystery;
03155     TELLFILE(AR.StoreData.Handle, &pos);
03156     nummystery = DIFBASE(ind->position, pos);
03157     /*
03158         MesPrint("--> We are at position      %8p", &pos);
03159         MesPrint("--> The index says      at %8p", &(ind->position));
03160         MesPrint("--> There are %d mystery bytes", nummystery);
03161     */
03162     if ( nummystery > 0 ) {
03163         if ( ReadFile(AR.StoreData.Handle, (UBYTE *) AT.WorkPointer, (LONG) sizeof(WORD)) !=
03164             sizeof(WORD) ) {
03165             UNLOCK(AM.storefilelock);
03166             AT.WorkPointer = oldwork;
03167             return(0);
03168         }
03169         Expressions[expr].numdummies = *AT.WorkPointer;
03170     }
03171     /*
03172         MesPrint("--> numdummies = %d", Expressions[expr].numdummies);
03173     */
03174     nummystery -= sizeof(WORD);
03175 }
03176 else {
03177     Expressions[expr].numdummies = 0;
03178 }
03179 if ( nummystery > 0 ) {
03180     if ( ReadFile(AR.StoreData.Handle, (UBYTE *) AT.WorkPointer, (LONG) sizeof(WORD)) !=
03181         sizeof(WORD) ) {
03182         UNLOCK(AM.storefilelock);
03183         AT.WorkPointer = oldwork;
03184         return(0);
03185     }
03186     if ( ( AS.OldNumFactors == 0 ) || ( AS.NumOldNumFactors < NumExpressions ) ) {

```

```

03187         WORD *buffer;
03188         int capacity = 20;
03189         if (capacity < NumExpressions) capacity = NumExpressions * 2;
03190
03191         buffer = (WORD *)Malloc(capacity * sizeof(WORD), "numfactors pointers");
03192         if (AS.OldNumFactors) {
03193             WCOPY(buffer, AS.OldNumFactors, AS.NumOldNumFactors);
03194             M_free(AS.OldNumFactors, "numfactors pointers");
03195         }
03196         AS.OldNumFactors = buffer;
03197
03198         buffer = (WORD *)Mloc1(capacity * sizeof(WORD), "vflags pointers");
03199         if (AS.Oldvflags) {
03200             WCOPY(buffer, AS.Oldvflags, AS.NumOldNumFactors);
03201             M_free(AS.Oldvflags, "vflags pointers");
03202         }
03203         AS.Oldvflags = buffer;
03204
03205         buffer = (WORD *)Mloc1(capacity * sizeof(WORD), "uflags pointers");
03206         if (AS.Olduflags) {
03207             WCOPY(buffer, AS.Olduflags, AS.NumOldNumFactors);
03208             M_free(AS.Olduflags, "uflags pointers");
03209         }
03210         AS.Oldvflags = buffer;
03211
03212         AS.NumOldNumFactors = capacity;
03213     }
03214
03215     AS.OldNumFactors[expr] =
03216     Expressions[expr].numfactors = *AT.WorkPointer;
03217     /*
03218     MesPrint("--> numfactors = %d", Expressions[expr].numfactors);
03219     */
03220     nummystery -= sizeof(WORD);
03221 }
03222 else {
03223     Expressions[expr].numfactors = 0;
03224 }
03225 if ( nummystery > 0 ) {
03226     if ( ReadFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer, (LONG)sizeof(WORD)) !=
03227         sizeof(WORD) ) {
03228         UNLOCK(AM.storefilelock);
03229         AT.WorkPointer = oldwork;
03230         return(0);
03231     }
03232     AS.Oldvflags[expr] =
03233     Expressions[expr].vflags = *AT.WorkPointer;
03234     /*
03235     MesPrint("--> vflags = %d", Expressions[expr].vflags);
03236     */
03237     nummystery -= sizeof(WORD);
03238 }
03239 else {
03240     Expressions[expr].vflags = 0;
03241 }
03242 if ( nummystery > 0 ) {
03243     if ( ReadFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer, (LONG)sizeof(WORD)) !=
03244         sizeof(WORD) ) {
03245         UNLOCK(AM.storefilelock);
03246         AT.WorkPointer = oldwork;
03247         return(0);
03248     }
03249     AS.Olduflags[expr] =
03250     Expressions[expr].uflags = *AT.WorkPointer;
03251     /*
03252     MesPrint("--> uflags = %d", Expressions[expr].uflags);
03253     */
03254     nummystery -= sizeof(WORD);
03255 }
03256 else {
03257     Expressions[expr].uflags = 0;
03258 }
03259 }
03260
03261 SeekFile(AR.StoreData.Handle, &(ind->position), SEEK_SET);
03262 if ( ReadFile(AR.StoreData.Handle, (UBYTE *)AT.WorkPointer, (LONG)sizeof(WORD)) !=
03263     sizeof(WORD) || !*AT.WorkPointer ) {
03264     UNLOCK(AM.storefilelock);
03265     AT.WorkPointer = oldwork;
03266     return(0);
03267 }
03268 num = *AT.WorkPointer - 1;
03269 num *= sizeof(WORD);
03270 if ( *AT.WorkPointer < 0 ||
03271     ReadFile(AR.StoreData.Handle, (UBYTE *) (AT.WorkPointer+1), num) != num ) {
03272     MesPrint("@Error in stored expressions file at position %10p", *position);
03273     UNLOCK(AM.storefilelock);

```



```

03274     AT.WorkPointer = oldwork;
03275     return(0);
03276 }
03277 UNLOCK(AM.storefilelock);
03278 ADDPOS(*position,num+sizeof(WORD));
03279 r->startposition = *position;
03280 AT.WorkPointer = oldwork;
03281 return(r);
03282 GetTcall:
03283 UNLOCK(AM.storefilelock);
03284 AT.WorkPointer = oldwork;
03285 MesCall("GetTable");
03286 return(0);
03287 ErrGt2:
03288 UNLOCK(AM.storefilelock);
03289 AT.WorkPointer = oldwork;
03290 MesPrint("Readererror in GetTable");
03291 return(0);
03292 }
03293
03294 /*
03295     #] GetTable :
03296     #[ CopyExpression :
03297
03298     Copies from one scratch buffer to another.
03299     We assume here that the complete 'from' scratch buffer is taken.
03300     We also assume that the 'from' buffer is positioned at the end of
03301     the expression.
03302
03303     The locks should be placed in the calling routine. We need basically
03304     AS.outputslock.
03305 */
03306
03307 int CopyExpression(FILEHANDLE *from, FILEHANDLE *to)
03308 {
03309     POSITION posfrom, poscopy;
03310     LONG fullsize,i;
03311     WORD *t1, *t2;
03312     int RetCode;
03313     SeekScratch(from,&posfrom);
03314     if ( from->handle < 0 ) { /* input is in memory */
03315         fullsize = (BASEPOSITION(posfrom))/sizeof(WORD);
03316         if ( ( to->PStop - to->PFull ) >= fullsize ) {
03317             /*
03318              Fits inside the buffer of the output. This will be fast.
03319             */
03320             t1 = from->Pbuffer;
03321             t2 = to->PFull;
03322             NCOPY(t2,t1,fullsize)
03323             to->PFull = to->PFill = t2;
03324             goto WriteTrailer;
03325         }
03326         if ( to->handle < 0 ) { /* First open the file */
03327             if ( ( RetCode = CreateFile(to->name) ) >= 0 ) {
03328                 to->handle = (WORD)RetCode;
03329                 PUTZERO(to->filesize);
03330                 PUTZERO(to->Pposition);
03331             }
03332             else {
03333                 MLOCK(ErrorMessageLock);
03334                 MesPrint("Cannot create scratch file %s",to->name);
03335                 MUNLOCK(ErrorMessageLock);
03336                 return(-1);
03337             }
03338         }
03339         t1 = from->Pbuffer;
03340         while ( fullsize > 0 ) {
03341             i = to->PStop - to->PFull;
03342             if ( i > fullsize ) i = fullsize;
03343             fullsize -= i;
03344             t2 = to->PFull;
03345             NCOPY(t2,t1,i)
03346             if ( fullsize > 0 ) {
03347                 SeekFile(to->handle,&(to->Pposition),SEEK_SET);
03348                 if ( WriteFile(to->handle,((BYTE *) (to->Pbuffer)),to->Psize) != to->Psize ) {
03349                     MLOCK(ErrorMessageLock);
03350                     MesPrint("Error while writing to disk. Disk full?");
03351                     MUNLOCK(ErrorMessageLock);
03352                     return(-1);
03353                 }
03354                 ADDPOS(to->Pposition,to->Psize);
03355             /*
03356             SeekFile(to->handle,&(to->Pposition),SEEK_CUR); */
03356             to->filesize = to->Pposition;
03357             to->PFill = to->PFull = to->Pbuffer;
03358         }
03359         else {
03360             to->PFill = to->PFull = t2;

```

```

03361     }
03362     }
03363     goto WriteTrailer;
03364 }
03365 /*
03366 Now the input involves a file. This needs the use of the PObuffer of from.
03367 First make sure the tail of the buffer has been written
03368 */
03369 if ( ((UBYTE *) (from->POfill)) - ((UBYTE *) (from->PObuffer)) > 0 ) {
03370     if ( WriteFile(from->handle, ((UBYTE *) (from->PObuffer)), ((UBYTE *) (from->POfill)) - ((UBYTE
03371 *) (from->PObuffer)))
03372     != ((UBYTE *) (from->POfill)) - ((UBYTE *) (from->PObuffer)) ) {
03373         MLOCK(ErrorMessageLock);
03374         MesPrint("Error while writing to disk. Disk full?");
03375         MUNLOCK(ErrorMessageLock);
03376         return(-1);
03377     }
03378     SeekFile(from->handle, &(from->POposition), SEEK_CUR);
03379     posfrom = from->filesize = from->POposition;
03380     from->POfill = from->POfull = from->PObuffer;
03381 }
03382 /*
03383 Now copy the complete contents
03384 */
03385 PUTZERO(poscopy);
03386 SeekFile(from->handle, &poscopy, SEEK_SET);
03387 while ( ISLESSPOS(poscopy, posfrom) ) {
03388     fullsize = ReadFile(from->handle, ((UBYTE *) (from->PObuffer)), from->POsize);
03389     if ( fullsize < 0 || ( fullsize % sizeof(WORD) ) != 0 ) {
03390         MLOCK(ErrorMessageLock);
03391         MesPrint("Error while reading from disk while copying expression.");
03392         MUNLOCK(ErrorMessageLock);
03393         return(-1);
03394     }
03395     fullsize /= sizeof(WORD);
03396     from->POfull = from->PObuffer + fullsize;
03397     t1 = from->PObuffer;
03398     if ( ( to->POstop - to->POfull ) >= fullsize ) {
03399         /*
03400 Fits inside the buffer of the output. This will be fast.
03401 */
03402         t2 = to->POfull;
03403         NCOPY(t2, t1, fullsize);
03404         to->POfill = to->POfull = t2;
03405     }
03406     else {
03407         if ( to->handle < 0 ) { /* First open the file */
03408             if ( ( RetCode = CreateFile(to->name) ) >= 0 ) {
03409                 to->handle = (WORD) RetCode;
03410                 PUTZERO(to->POposition);
03411                 PUTZERO(to->filesize);
03412             }
03413             else {
03414                 MLOCK(ErrorMessageLock);
03415                 MesPrint("Cannot create scratch file %s", to->name);
03416                 MUNLOCK(ErrorMessageLock);
03417                 return(-1);
03418             }
03419         }
03420         while ( fullsize > 0 ) {
03421             i = to->POstop - to->POfull;
03422             if ( i > fullsize ) i = fullsize;
03423             fullsize -= i;
03424             t2 = to->POfull;
03425             NCOPY(t2, t1, i);
03426             if ( fullsize > 0 ) {
03427                 SeekFile(to->handle, &(to->POposition), SEEK_SET);
03428                 if ( WriteFile(to->handle, ((UBYTE *) (to->PObuffer)), to->POsize) != to->POsize ) {
03429                     MLOCK(ErrorMessageLock);
03430                     MesPrint("Error while writing to disk. Disk full?");
03431                     MUNLOCK(ErrorMessageLock);
03432                     return(-1);
03433                 }
03434                 ADDPOS(to->POposition, to->POsize);
03435             } /*
03436 SeekFile(to->handle, &(to->POposition), SEEK_CUR); */
03437             to->filesize = to->POposition;
03438             to->POfill = to->POfull = to->PObuffer;
03439         }
03440         else {
03441             to->POfill = to->POfull = t2;
03442         }
03443     }
03444     SeekFile(from->handle, &poscopy, SEEK_CUR);
03445 }
03446 WriteTrailer:

```

```

03447     if ( ( to->handle >= 0 ) && ( to->POfill > to->PObuffer ) ) {
03448         fullsize = (UBYTE *) (to->POfill) - (UBYTE *) (to->PObuffer);
03449     /*
03450         PUTZERO(to->POposition);
03451         SeekFile(to->handle,&(to->POposition),SEEK_END);
03452     */
03453         SeekFile(to->handle,&(to->filesize),SEEK_SET);
03454         if ( WriteFile(to->handle,((UBYTE *) (to->PObuffer)),fullsize) != fullsize ) {
03455             MLOCK(ErrorMessageLock);
03456             MesPrint("Error while writing to disk. Disk full?");
03457             MUNLOCK(ErrorMessageLock);
03458             return(-1);
03459         }
03460         ADDPOS(to->filesize,fullsize);
03461         to->POposition = to->filesize;
03462         to->POfill = to->POfull = to->PObuffer;
03463     }
03464
03465     return(0);
03466 }
03467
03468 /*
03469     #] CopyExpression :
03470     #[ ExprStatus :
03471 */
03472
03473 #ifndef HIDEDEBUG
03474
03475 static UBYTE *statusexpr[] = {
03476     (UBYTE *) "LOCALEXPRESSION"
03477 , (UBYTE *) "SKIPLEXPRESSION"
03478 , (UBYTE *) "DROPLEXPRESSION"
03479 , (UBYTE *) "DROPPLEXPRESSION"
03480 , (UBYTE *) "GLOBALEXPRESSION"
03481 , (UBYTE *) "SKIPGEXPRESSION"
03482 , (UBYTE *) "DROPGEXPRESSION"
03483 , (UBYTE *) "UNKNOWN"
03484 , (UBYTE *) "STOREDEXPRESSION"
03485 , (UBYTE *) "HIDDENLEXPRESSION"
03486 , (UBYTE *) "HIDELEXPRESSION"
03487 , (UBYTE *) "DROPHLEXPRESSION"
03488 , (UBYTE *) "UNHIDELEXPRESSION"
03489 , (UBYTE *) "HIDDENGEXPRESSION"
03490 , (UBYTE *) "HIDEGEXPRESSION"
03491 , (UBYTE *) "DROPHGEXPRESSION"
03492 , (UBYTE *) "UNHIDEGEXPRESSION"
03493 , (UBYTE *) "INTOHIDELEXPRESSION"
03494 , (UBYTE *) "INTOHIDEGEXPRESSION"
03495 };
03496
03497 void ExprStatus(EXPRESSIONS e)
03498 {
03499     MesPrint("Expression %s(%d) has status %s(%d,%d). Buffer: %d, Position: %15p",
03500         AC.exprnames->namebuffer+e->name,(WORD) (e->Expressions),
03501         statusexpr[e->status],e->status,e->hidelevel,
03502         e->whichbuffer,&(e->onfile));
03503 }
03504
03505 #endif
03506
03507 /*
03508     #] ExprStatus :
03509     #] StoreExpressions :
03510     #[ System Independent Saved Expressions :
03511
03512     All functions concerned with the system independent reading of save-files
03513     are here. They are called by the functions CoLoad, PutInStore,
03514     SetFileIndex, FindInIndex. In case no translation (endianness flip,
03515     resizing of words, renumbering) has to be done, they just do simple file
03516     reading. The function SaveFileHeader() for writing a header with
03517     information about the system architecture, FORM version, etc. is also
03518     located here.
03519
03520     #[ Flip :
03521 */
03522
03523 static void FlipN(UBYTE *p, int length)
03524 {
03525     UBYTE *q, buf;
03526     q = p + length;
03527     do {
03528         --q;
03529         buf = *p; *p = *q; *q = buf;
03530     } while ( ++p != q );
03531 }
03532
03533 static void Flip16(UBYTE *p)

```

```

03552 {
03553     uint16_t in = *((uint16_t *)p);
03554     uint16_t out = (uint16_t) ( ((in) >> 8) & UINT16_C(0x00FF) | ((in) << 8) & UINT16_C(0xFF00) );
03555     *((uint16_t *)p) = out;
03556 }
03557
03559 static void Flip32(UBYTE *p)
03560 {
03561     uint32_t in = *((uint32_t *)p);
03562     uint32_t out =
03563         ( ((in) >> 24) & UINT32_C(0x000000FF) ) | ((in) >> 8) & UINT32_C(0x0000FF00) | \
03564         ((in) << 8) & UINT32_C(0x00FF0000) | ((in) << 24) & UINT32_C(0xFF000000) );
03565     *((uint32_t *)p) = out;
03566 }
03567
03569 #ifdef UINT64_C
03570 static void Flip64(UBYTE *p)
03571 {
03572     uint64_t in = *((uint64_t *)p);
03573     uint64_t out =
03574         ( ((in) >> 56) & UINT64_C(0x00000000000000FF) ) | ((in) >> 40) & UINT64_C(0x000000000000FF00) )
03575         | \
03576         ((in) >> 24) & UINT64_C(0x0000000000FF0000) ) | ((in) >> 8) & UINT64_C(0x00000000FF000000) )
03577         | \
03578         ((in) << 8) & UINT64_C(0x000000FF00000000) ) | ((in) << 24) & UINT64_C(0x0000FF0000000000) )
03579         | \
03580         ((in) << 40) & UINT64_C(0x00FF000000000000) ) | ((in) << 56) & UINT64_C(0xFF00000000000000) )
03581 );
03582     *((uint64_t *)p) = out;
03583 }
03584 #else
03585 static void Flip64(UBYTE *p) { FlipN(p, 8); }
03586 #endif /* UINT64_C */
03587
03588 static void Flip128(UBYTE *p) { FlipN(p, 16); }
03589
03590 /*
03591     #] Flip :
03592     #[ Resize :
03593 */
03594
03596 static void ResizeDataBE(UBYTE *src, int slen, UBYTE *dst, int dlen)
03597 {
03598     if ( slen > dlen ) {
03599         src += slen - dlen;
03600         while ( dlen-- ) { *dst++ = *src++; }
03601     }
03602     else {
03603         int i = dlen - slen;
03604         while ( i-- ) { *dst++ = 0; }
03605         while ( slen-- ) { *dst++ = *src++; }
03606     }
03607 }
03608
03609 static void ResizeDataLE(UBYTE *src, int slen, UBYTE *dst, int dlen)
03610 {
03611     if ( slen > dlen ) {
03612         while ( dlen-- ) { *dst++ = *src++; }
03613     }
03614     else {
03615         int i = dlen - slen;
03616         while ( slen-- ) { *dst++ = *src++; }
03617         while ( i-- ) { *dst++ = 0; }
03618     }
03619 }
03620
03621 static void Resize16t16(UBYTE *src, UBYTE *dst)
03622 {
03623     *((int16_t *)dst) = *((int16_t *)src);
03624 }
03625
03626 static void Resize16t32(UBYTE *src, UBYTE *dst)
03627 {
03628     int16_t in = *((int16_t *)src);
03629     int32_t out = (int32_t)in;
03630     *((int32_t *)dst) = out;
03631 }
03632
03633 #ifdef INT64_C
03634 static void Resize16t64(UBYTE *src, UBYTE *dst)
03635 {
03636     int16_t in = *((int16_t *)src);
03637     int64_t out = (int64_t)in;
03638     *((int64_t *)dst) = out;
03639 }
03640 #else
03641 static void Resize16t64(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 2, dst, 8); }
03642

```

```

03666 #endif /* INT64_C */
03667
03669 static void Resize16t128(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 2, dst, 16); }
03670
03672 static void Resize32t32(UBYTE *src, UBYTE *dst)
03673 {
03674     *((int32_t *)dst) = *((int32_t *)src);
03675 }
03676
03678 #ifdef INT64_C
03679 static void Resize32t64(UBYTE *src, UBYTE *dst)
03680 {
03681     int32_t in = *((int32_t *)src);
03682     int64_t out = (int64_t)in;
03683     *((int64_t *)dst) = out;
03684 }
03685 #else
03686 static void Resize32t64(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 4, dst, 8); }
03687 #endif /* INT64_C */
03688
03690 static void Resize32t128(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 4, dst, 16); }
03691
03693 #ifdef INT64_C
03694 static void Resize64t64(UBYTE *src, UBYTE *dst)
03695 {
03696     *((int64_t *)dst) = *((int64_t *)src);
03697 }
03698 #else
03699 static void Resize64t64(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 8, dst, 8); }
03700 #endif /* INT64_C */
03701
03703 static void Resize64t128(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 8, dst, 16); }
03704
03706 static void Resize128t128(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 16); }
03707
03709 static void Resize32t16(UBYTE *src, UBYTE *dst)
03710 {
03711     int32_t in = *((int32_t *)src);
03712     int16_t out = (int16_t)in;
03713     if ( in > (1<<15)-1 || in < -(1<<15)+1 ) AO.resizeFlag |= 1;
03714     *((int16_t *)dst) = out;
03715 }
03716
03723 static void Resize32t16NC(UBYTE *src, UBYTE *dst)
03724 {
03725     int32_t in = *((int32_t *)src);
03726     int16_t out = (int16_t)in;
03727     *((int16_t *)dst) = out;
03728 }
03729
03730 #ifdef INT64_C
03732 static void Resize64t16(UBYTE *src, UBYTE *dst)
03733 {
03734     int64_t in = *((int64_t *)src);
03735     int16_t out = (int16_t)in;
03736     if ( in > (1<<15)-1 || in < -(1<<15)+1 ) AO.resizeFlag |= 1;
03737     *((int16_t *)dst) = out;
03738 }
03740 static void Resize64t16NC(UBYTE *src, UBYTE *dst)
03741 {
03742     int64_t in = *((int64_t *)src);
03743     int16_t out = (int16_t)in;
03744     *((int16_t *)dst) = out;
03745 }
03746 #else
03748 static void Resize64t16(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 8, dst, 2); }
03750 static void Resize64t16NC(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 8, dst, 2); }
03751 #endif /* INT64_C */
03752
03753 #ifdef INT64_C
03755 static void Resize64t32(UBYTE *src, UBYTE *dst)
03756 {
03757     int64_t in = *((int64_t *)src);
03758     int32_t out = (int32_t)in;
03759     if ( in > (INT64_C(1)<<31)-1 || in < -(INT64_C(1)<<31)+1 ) AO.resizeFlag |= 1;
03760     *((int32_t *)dst) = out;
03761 }
03763 static void Resize64t32NC(UBYTE *src, UBYTE *dst)
03764 {
03765     int64_t in = *((int64_t *)src);
03766     int32_t out = (int32_t)in;
03767     *((int32_t *)dst) = out;
03768 }
03769 #else
03771 static void Resize64t32(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 8, dst, 4); }
03773 static void Resize64t32NC(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 8, dst, 4); }
03774 #endif /* INT64_C */

```

```

03775
03777 static void Resize128t16(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 2); }
03778
03780 static void Resize128t16NC(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 2); }
03781
03783 static void Resize128t32(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 4); }
03784
03786 static void Resize128t32NC(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 4); }
03787
03789 static void Resize128t64(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 8); }
03790
03792 static void Resize128t64NC(UBYTE *src, UBYTE *dst) { AO.ResizeData(src, 16, dst, 8); }
03793
03794 /*
03795     #] Resize :
03796     #[ CheckPower and RenumberVec :
03797 */
03798
03805 static void CheckPower32(UBYTE *p)
03806 {
03807     if ( *((int32_t *)p) < -MAXPOWER ) {
03808         AO.powerFlag |= 0x01;
03809         *((int32_t *)p) = -MAXPOWER;
03810     }
03811     p += sizeof(int32_t);
03812     if ( *((int32_t *)p) > MAXPOWER ) {
03813         AO.powerFlag |= 0x02;
03814         *((int32_t *)p) = MAXPOWER;
03815     }
03816 }
03817
03825 static void RenumberVec32(UBYTE *p)
03826 {
03827     /* int32_t wilddoffset = *((int32_t *)AO.SaveHeader.wilddoffset); */
03828     void *dummy = (void *)AO.SaveHeader.wilddoffset; /* to remove a warning about strict-aliasing
rules in gcc */
03829     int32_t wilddoffset = *(int32_t *)dummy;
03830     int32_t in = *((int32_t *)p);
03831     in = in + 2*wilddoffset;
03832     in = in - 2*WILDDOFFSET;
03833     *((int32_t *)p) = in;
03834 }
03835
03836 /*
03837     #] CheckPower and RenumberVec :
03838     #[ ResizeCoeff :
03839 */
03840
03854 static void ResizeCoeff32(UBYTE **bout, UBYTE *bend, UBYTE *top)
03855 {
03856     int i;
03857     int32_t sign;
03858     int32_t *in, *p;
03859     int32_t *out = (int32_t *)*bout;
03860     int32_t *end = (int32_t *)bend;
03861
03862     if ( sizeof(WORD) == 2 ) {
03863         /* 4 -> 2 */
03864         int32_t len = (end - 1 - out) / 2;
03865         int zeros = 2;
03866         p = out + len - 1;
03867
03868         if ( *p & 0xFFFF0000 ) --zeros;
03869         p += len;
03870         if ( *p & 0xFFFF0000 ) --zeros;
03871
03872         in = end - 1;
03873         sign = ( *in-- > 0 ) ? 1 : -1;
03874         p = out + 4*len;
03875         if ( zeros == 2 ) p -= 2;
03876         out = p--;
03877
03878         if ( zeros < 2 ) *p-- = *in >> 16;
03879         *p-- = *in-- & 0x0000FFFF;
03880         for ( i = 1; i < len; ++i ) {
03881             *p-- = *in >> 16;
03882             *p-- = *in-- & 0x0000FFFF;
03883         }
03884         if ( zeros < 2 ) *p-- = *in >> 16;
03885         *p-- = *in-- & 0x0000FFFF;
03886         for ( i = 1; i < len; ++i ) {
03887             *p-- = *in >> 16;
03888             *p-- = *in-- & 0x0000FFFF;
03889         }
03890
03891         *out = (out - p) * sign;
03892         *bout = (UBYTE *) (out+1);

```

```

03893
03894     }
03895     else {
03896         /* 2 -> 4 */
03897         int32_t len = (end - 1 - out) / 2;
03898         if ( len == 1 ) {
03899             *out = *(uint16_t *)out;
03900             ++out;
03901             *out = *(uint16_t *)out;
03902             ++out;
03903             ++out;
03904         }
03905         else {
03906             p = out;
03907             *out = *(uint16_t *)out;
03908             in = out + 1;
03909             for ( i = 1; i < len; ++i ) {
03910                 /* shift */
03911                 *out = (uint32_t)(*(uint16_t *)out)
03912                     + ((uint32_t)(*(uint16_t *)in) << 16);
03913                 ++in;
03914                 if ( ++i == len ) break;
03915                 /* copy */
03916                 ++out;
03917                 *out = *(uint16_t *)in;
03918                 ++in;
03919             }
03920             ++out;
03921             *out = *(uint16_t *)in;
03922             ++in;
03923             for ( i = 1; i < len; ++i ) {
03924                 /* shift */
03925                 *out = (uint32_t)(*(uint16_t *)out)
03926                     + ((uint32_t)(*(uint16_t *)in) << 16);
03927                 ++in;
03928                 if ( ++i == len ) break;
03929                 /* copy */
03930                 ++out;
03931                 *out = *(uint16_t *)in;
03932                 ++in;
03933             }
03934             ++out;
03935             if ( *in < 0 ) *out = -(out - p + 1);
03936             else *out = out - p + 1;
03937             ++out;
03938         }
03939
03940         if ( out > (int32_t *)top ) {
03941             MesPrint("Error in resizing coefficient!");
03942         }
03943
03944         *bout = (UBYTE *)out;
03945     }
03946 }
03947
03948 /*
03949     #] ResizeCoeff :
03950     #[ WriteStoreHeader :
03951 */
03952
03953 #define SAVEREVISION 0x02
03954
03955 LONG WriteStoreHeader(WORD handle)
03956 {
03957     /* template of the STOREHEADER */
03958     static STOREHEADER sh = {
03959         { 0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF }, /* store header mark */
03960         0, 0, 0, 0, /* sizeof of WORD, LONG, POSITION, void* */
03961         { 0 }, /* endianness check number */
03962         0, 0, 0, 0, /* sizeof variable structs */
03963         { 0 }, /* maxpower */
03964         { 0 }, /* wildoffset */
03965         SAVEREVISION, /* revision */
03966         { 0 } }; /* reserved */
03967     int endian, i;
03968
03969     /* if called for the first time ... */
03970     if ( sh.lenWORD == 0 ) {
03971         sh.lenWORD = sizeof(WORD);
03972         sh.lenLONG = sizeof(LONG);
03973         sh.lenPOS = sizeof(POSITION);
03974         sh.lenPOINTER = sizeof(void *);
03975
03976         endian = 1;
03977         for ( i = 1; i < (int)sizeof(int); ++i ) {
03978             endian <= 8;
03979             endian += i+1;
03980         }
03981     }

```

```

03989     }
03990     for ( i = 0; i < (int)sizeof(int); ++i ) sh.endianness[i] = ((char *)&endian)[i];
03991
03992     sh.sSym = sizeof(struct SyMbol);
03993     sh.sInd = sizeof(struct InDeX);
03994     sh.sVec = sizeof(struct VeCtOr);
03995     sh.sFun = sizeof(struct FuNcTiOn);
03996
03997     /* *((WORD *)sh.maxpower) = MAXPOWER;
03998     *((WORD *)sh.wildoffset) = WILDOFFSET; */
03999     {
04000         WORD dumw[8];
04001         UBYTE *dummy;
04002         for ( i = 0; i < 8; i++ ) dumw[i] = 0;
04003         dummy = (UBYTE *)dumw;
04004         dumw[0] = (WORD)MAXPOWER;
04005         for ( i = 0; i < 16; i++ ) sh.maxpower[i] = dummy[i];
04006         dumw[0] = (WORD)WILDOFFSET;
04007         for ( i = 0; i < 16; i++ ) sh.wildoffset[i] = dummy[i];
04008     }
04009 }
04010
04011 return ( WriteFile(handle, (UBYTE *)(&sh), (LONG)(sizeof(STOREHEADER)))
04012         != (LONG)(sizeof(STOREHEADER)) );
04013 }
04014
04015 /*
04016     #] WriteStoreHeader :
04017     #[ CompactifySizeof :
04018 */
04019
04027 static unsigned int CompactifySizeof(unsigned int size)
04028 {
04029     switch ( size ) {
04030         case 2: return 0;
04031         case 4: return 1;
04032         case 8: return 2;
04033         case 16: return 3;
04034         default: MesPrint("Error compactifying size.");
04035                 return 3;
04036     }
04037 }
04038
04039 /*
04040     #] CompactifySizeof :
04041     #[ ReadSaveHeader :
04042 */
04043
04057 int ReadSaveHeader(void)
04058 {
04059     /* Read-only tables of function pointers for conversions. */
04060     static void (*flipJumpTable[4])(UBYTE *) =
04061     { Flip16, Flip32, Flip64, Flip128 };
04062     static void (*resizeJumpTable[4][4])(UBYTE *, UBYTE *) = /* "own x saved"-sizes */
04063     { { Resize16t16, Resize32t16, Resize64t16, Resize128t16 },
04064       { Resize16t32, Resize32t32, Resize64t32, Resize128t32 },
04065       { Resize16t64, Resize32t64, Resize64t64, Resize128t64 },
04066       { Resize16t128, Resize32t128, Resize64t128, Resize128t128 } };
04067     static void (*resizeNCJumpTable[4][4])(UBYTE *, UBYTE *) = /* "own x saved"-sizes */
04068     { { Resize16t16, Resize32t16NC, Resize64t16NC, Resize128t16NC },
04069       { Resize16t32, Resize32t32, Resize64t32NC, Resize128t32NC },
04070       { Resize16t64, Resize32t64, Resize64t64, Resize128t64NC },
04071       { Resize16t128, Resize32t128, Resize64t128, Resize128t128 } };
04072
04073     int endian, i;
04074     WORD idxW = CompactifySizeof(sizeof(WORD));
04075     WORD idxL = CompactifySizeof(sizeof(LONG));
04076     WORD idxP = CompactifySizeof(sizeof(POSITION));
04077     WORD idxVP = CompactifySizeof(sizeof(void *));
04078
04079     AO.transFlag = 0;
04080     AO.powerFlag = 0;
04081     AO.resizeFlag = 0;
04082     AO.bufferedInd = 0;
04083
04084     if ( ReadFile(AO.SaveData.Handle, (UBYTE *)(&AO.SaveHeader),
04085                 (LONG)sizeof(STOREHEADER)) != (LONG)sizeof(STOREHEADER) )
04086         return (MesPrint("Error reading save file header"));
04087
04088     /* check whether save-file has no header. if yes then it is an old version
04089        of FORM -> go back to position 0 in file which then contains the first
04090        index and skip the rest. */
04091     for ( i = 0; i < 8; ++i ) {
04092         if ( AO.SaveHeader.headermark[i] != 0xFF ) {
04093             POSITION p;
04094             PUTZERO(p);
04095             SeekFile(AO.SaveData.Handle, &p, SEEK_SET);

```



```

04096         return ( 0 );
04097     }
04098 }
04099
04100 if ( AO.SaveHeader.revision != SAVEREVISION ) {
04101     return(MesPrint("Save file header from an old version. Cannot read this file."));
04102 }
04103
04104 endian = 1;
04105 for ( i = 1; i < (int)sizeof(int); ++i ) {
04106     endian <= 8;
04107     endian += i+1;
04108 }
04109 if ( ((char *)&endian)[0] < ((char *)&endian)[1] ) {
04110     /* this machine is big-endian */
04111     AO.ResizeData = ResizeDataBE;
04112 }
04113 else {
04114     /* this machine is little-endian */
04115     AO.ResizeData = ResizeDataLE;
04116 }
04117
04118 /* set AO.transFlag if ANY conversion has to be done later */
04119 if ( AO.SaveHeader.endianness[0] > AO.SaveHeader.endianness[1] ) {
04120     AO.transFlag = ( ((char *)&endian)[0] < ((char *)&endian)[1] );
04121 }
04122 else {
04123     AO.transFlag = ( ((char *)&endian)[0] > ((char *)&endian)[1] );
04124 }
04125 if ( (WORD)AO.SaveHeader.lenWORD != sizeof(WORD) ) AO.transFlag |= 0x02;
04126 if ( (WORD)AO.SaveHeader.lenLONG != sizeof(LONG) ) AO.transFlag |= 0x04;
04127 if ( (WORD)AO.SaveHeader.lenPOS != sizeof(POSITION) ) AO.transFlag |= 0x08;
04128 if ( (WORD)AO.SaveHeader.lenPOINTER != sizeof(void *) ) AO.transFlag |= 0x10;
04129
04130 AO.FlipWORD = flipJumpTable[idxW];
04131 AO.FlipLONG = flipJumpTable[idxL];
04132 AO.FlipPOS = flipJumpTable[idxP];
04133 AO.FlipPOINTER = flipJumpTable[idxVP];
04134
04135 /* Works only for machines where WORD is not greater than 32bit ! */
04136 AO.CheckPower = CheckPower32;
04137 AO.RenumberVec = RenumberVec32;
04138
04139 AO.ResizeWORD = resizeJumpTable[idxW][CompactifySizeof(AO.SaveHeader.lenWORD)];
04140 AO.ResizeNCWORD = resizeNCJumpTable[idxW][CompactifySizeof(AO.SaveHeader.lenWORD)];
04141 AO.ResizeLONG = resizeJumpTable[idxL][CompactifySizeof(AO.SaveHeader.lenLONG)];
04142 AO.ResizePOS = resizeJumpTable[idxP][CompactifySizeof(AO.SaveHeader.lenPOS)];
04143 AO.ResizePOINTER = resizeJumpTable[idxVP][CompactifySizeof(AO.SaveHeader.lenPOINTER)];
04144
04145 {
04146     WORD dumw[8];
04147     UBYTE *dummy;
04148     for ( i = 0; i < 8; i++ ) dumw[i] = 0;
04149     dummy = (UBYTE *)dumw;
04150     for ( i = 0; i < 16; i++ ) dummy[i] = AO.SaveHeader.maxpower[i];
04151     AO.mpower = dumw[0];
04152 }
04153
04154 return ( 0 );
04155 }
04156
04157 /*
04158     #] ReadSaveHeader :
04159     #[ ReadSaveIndex :
04160 */
04161
04175 LONG ReadSaveIndex(FILEINDEX *fileind)
04176 {
04177     /* do we need some translation for the FILEINDEX? */
04178     if ( AO.transFlag ) {
04179         /* if a translated FILEINDEX can hold less entries than the original
04180            FILEINDEX, then we need to buffer the extra entries in this static
04181            variable (can happen going from 32bit to 64bit */
04182         static FILEINDEX sbuffer;
04183
04184         FILEINDEX buffer;
04185         UBYTE *p, *q;
04186         int i;
04187
04188         /* shortcuts */
04189         int lenW = AO.SaveHeader.lenWORD;
04190         int lenL = AO.SaveHeader.lenLONG;
04191         int lenP = AO.SaveHeader.lenPOS;
04192
04193         /* if we have a buffered FILEINDEX then just return it */
04194         if ( AO.bufferedInd ) {
04195             *fileind = sbuffer;

```

```

04196         AO.bufferedInd = 0;
04197         return ( 0 );
04198     }
04199
04200     if ( ReadFile(AO.SaveData.Handle, (UBYTE *)fileind, sizeof(FILEINDEX))
04201         != sizeof(FILEINDEX) ) {
04202         return ( MesPrint("Error(1) reading stored expression.") );
04203     }
04204
04205     /* do we need to flip the endianness? */
04206     if ( AO.transFlag & 1 ) {
04207         LONG number;
04208         /* padding bytes */
04209         int padp = lenL - ((lenW*5+(MAXENAME + 1)) & (lenL-1));
04210         p = (UBYTE *)fileind;
04211         AO.FlipPOS(p); p += lenP;          /* next */
04212         AO.FlipPOS(p);                    /* number */
04213         AO.ResizePOS(p, (UBYTE *)&number);
04214         p += lenP;
04215         for ( i = 0; i < number; ++i ) {
04216             AO.FlipPOS(p); p += lenP;      /* position */
04217             AO.FlipPOS(p); p += lenP;      /* length */
04218             AO.FlipPOS(p); p += lenP;      /* variables */
04219             AO.FlipLONG(p); p += lenL;     /* CompressSize */
04220             AO.FlipWORD(p); p += lenW;     /* nsymbols */
04221             AO.FlipWORD(p); p += lenW;     /* nindices */
04222             AO.FlipWORD(p); p += lenW;     /* nvectors */
04223             AO.FlipWORD(p); p += lenW;     /* nfunctions */
04224             AO.FlipWORD(p); p += lenW;     /* size */
04225             p += padp;
04226         }
04227     }
04228
04229     /* do we need to resize data? */
04230     if ( AO.transFlag > 1 ) {
04231         LONG number, maxnumber;
04232         int n;
04233         /* padding bytes */
04234         int padp = lenL - ((lenW*5+(MAXENAME + 1)) & (lenL-1));
04235         int padq = sizeof(LONG) - ((sizeof(WORD)*5+(MAXENAME + 1)) & (sizeof(LONG)-1));
04236
04237         p = (UBYTE *)fileind; q = (UBYTE *)&buffer;
04238         AO.ResizePOS(p, q);                /* next */
04239         p += lenP; q += sizeof(POSITION);
04240         AO.ResizePOS(p, q);                /* number */
04241         p += lenP;
04242         number = BASEPOSITION(*((POSITION *)q));
04243         /* if FILEINDEX in file contains more entries than the FILEINDEX in
04244            memory can contain, then adjust the numbers and prepare for
04245            buffering */
04246         if ( number > (LONG)INFILEINDEX ) {
04247             AO.bufferedInd = number-INFILEINDEX;
04248             if ( AO.bufferedInd > (WORD)INFILEINDEX ) {
04249                 /* can happen when reading 32bit and writing >=128bit.
04250                    Fix: more than one static buffer for FILEINDEX */
04251                 return ( MesPrint("Too many index entries.") );
04252             }
04253             maxnumber = INFILEINDEX;
04254             SETBASEPOSITION(*((POSITION *)q), INFILEINDEX);
04255         }
04256         else {
04257             maxnumber = number;
04258         }
04259         q += sizeof(POSITION);
04260         /* read all INDEXENTRY that fit into the output buffer */
04261         for ( i = 0; i < maxnumber; ++i ) {
04262             AO.ResizePOS(p, q);                /* position */
04263             p += lenP; q += sizeof(POSITION);
04264             AO.ResizePOS(p, q);                /* length */
04265             p += lenP; q += sizeof(POSITION);
04266             AO.ResizePOS(p, q);                /* variables */
04267             p += lenP; q += sizeof(POSITION);
04268             AO.ResizeLONG(p, q);                /* CompressSize */
04269             p += lenL; q += sizeof(LONG);
04270             AO.ResizeWORD(p, q);                /* nsymbols */
04271             p += lenW; q += sizeof(WORD);
04272             AO.ResizeWORD(p, q);                /* nindices */
04273             p += lenW; q += sizeof(WORD);
04274             AO.ResizeWORD(p, q);                /* nvectors */
04275             p += lenW; q += sizeof(WORD);
04276             AO.ResizeWORD(p, q);                /* nfunctions */
04277             p += lenW; q += sizeof(WORD);
04278             AO.ResizeWORD(p, q);                /* size (unchanged!) */
04279             p += lenW; q += sizeof(WORD);
04280             n = MAXENAME + 1;
04281             NCOPYB(q, p, n)
04282             p += padp;

```

```

04283         q += padq;
04284     }
04285     /* read all the remaining INDEXENTRY and put them into the static buffer */
04286     if ( AO.bufferedInd ) {
04287         sbuffer.next = buffer.next;
04288         SETBASEPOSITION(sbuffer.number, AO.bufferedInd);
04289         q = (UBYTE *)&sbuffer + sizeof(POSITION) + sizeof(LONG);
04290         for ( i = maxnumber; i < number; ++i ) {
04291             AO.ResizePOS(p, q);          /* position */
04292             p += lenP; q += sizeof(POSITION);
04293             AO.ResizePOS(p, q);          /* length */
04294             p += lenP; q += sizeof(POSITION);
04295             AO.ResizePOS(p, q);          /* variables */
04296             p += lenP; q += sizeof(POSITION);
04297             AO.ResizeLONG(p, q);         /* CompressSize */
04298             p += lenL; q += sizeof(LONG);
04299             AO.ResizeWORD(p, q);         /* nsymbols */
04300             p += lenW; q += sizeof(WORD);
04301             AO.ResizeWORD(p, q);         /* nindices */
04302             p += lenW; q += sizeof(WORD);
04303             AO.ResizeWORD(p, q);         /* nvectors */
04304             p += lenW; q += sizeof(WORD);
04305             AO.ResizeWORD(p, q);         /* nfunctions */
04306             p += lenW; q += sizeof(WORD);
04307             AO.ResizeWORD(p, q);         /* size (unchanged!) */
04308             p += lenW; q += sizeof(WORD);
04309             n = MAXENAME + 1;
04310             NCOPYB(q, p, n)
04311             p += padp;
04312             q += padq;
04313         }
04314     }
04315     /* copy to output */
04316     p = (UBYTE *)fileind; q = (UBYTE *)&buffer; n = sizeof(FILEINDEX);
04317     NCOPYB(p, q, n)
04318 }
04319 return ( 0 );
04320 } else {
04321     return ( ReadFile(AO.SaveData.Handle, (UBYTE *)fileind, sizeof(FILEINDEX))
04322             != sizeof(FILEINDEX) );
04323 }
04324 }
04325
04326 /*
04327     #] ReadSaveIndex :
04328     #[ ReadSaveVariables :
04329 */
04330
04361 LONG ReadSaveVariables(UBYTE *buffer, UBYTE *top, LONG *size, LONG *outsize, \
04362                        INDEXENTRY *ind, LONG *stage)
04363 {
04364     /* do we need some translation for the variables? */
04365     if ( AO.transFlag ) {
04366         /* counters for the number of already read symbols, indices, ... that
04367            need to remain valid between different calls to ReadSaveVariables().
04368            are initialized if stage == -1 */
04369         static WORD numReadSym;
04370         static WORD numReadInd;
04371         static WORD numReadVec;
04372         static WORD numReadFun;
04373
04374         POSITION pos;
04375         UBYTE *in, *out, *pp = 0, *end, *outbuf;
04376         LONG numread;
04377         WORD namelen, realnamelen;
04378         /* shortcuts */
04379         WORD lenW = AO.SaveHeader.lenWORD;
04380         WORD lenL = AO.SaveHeader.lenLONG;
04381         WORD lenP = AO.SaveHeader.lenPOINTER;
04382         WORD flip = AO.transFlag & 1;
04383
04384         /* remember file position in case we have to rewind */
04385         TELLFILE(AO.SaveData.Handle, &pos);
04386
04387         /* decide on the position of the in and out buffers.
04388            if the input is "bigger" than the output, we resize in-place, i.e.
04389            we immediately overwrite the source data by the translated data. in
04390            and out buffers start at the same place.
04391            if not, we read from the end of the given buffer and write at the
04392            beginning. */
04393         if ( (lenW > (WORD)sizeof(WORD))
04394             || ( (lenW == (WORD)sizeof(WORD))
04395                 && ( (lenL > (WORD)sizeof(LONG))
04396                     || ( (lenL == (WORD)sizeof(LONG)) && lenP > (WORD)sizeof(void *) )
04397                 )
04398             ) ) {
04399             in = out = buffer;

```

```

04400         end = buffer + *size;
04401     }
04402     else {
04403         /* data will grow roughly by sizeof(WORD)/lenW. the exact value is
04404            not important. if reading and writing areas start to overlap, the
04405            reading will already be near the end of the data and overwriting
04406            doesn't matter. */
04407         LONG newsize = (top - buffer) / (1 + sizeof(WORD)/lenW);
04408         end = top;
04409         out = buffer;
04410         in = end - newsize;
04411         if ( *size > newsize ) *size = newsize;
04412     }
04413
04414     if ( ( numread = ReadFile(AO.SaveData.Handle, in, *size) ) != *size ) {
04415         return ( MesPrint("Error(2) reading stored expression.") );
04416     }
04417
04418     *size = 0;
04419     *outsize = 0;
04420
04421     /* first time in ReadSaveVariables(). initialize counters. */
04422     if ( *stage == -1 ) {
04423         numReadSym = 0;
04424         numReadInd = 0;
04425         numReadVec = 0;
04426         numReadFun = 0;
04427         ++*stage;
04428     }
04429
04430     while ( in < end ) {
04431         /* Symbols */
04432         if ( *stage == 0 ) {
04433             if ( ind->nsymbols <= numReadSym ) {
04434                 ++*stage;
04435                 continue;
04436             }
04437             if ( end - in < AO.SaveHeader.sSym ) {
04438                 goto RSVEnd;
04439             }
04440             if ( flip ) {
04441                 pp = in;
04442                 AO.FlipLONG(pp); pp += lenL;
04443                 while ( pp < in + AO.SaveHeader.sSym ) {
04444                     AO.FlipWORD(pp); pp += lenW;
04445                 }
04446             }
04447             pp = in + AO.SaveHeader.sSym;
04448             AO.ResizeLONG(in, out); in += lenL; out += sizeof(LONG); /* name */
04449             AO.CheckPower(in);
04450             AO.ResizeWORD(in, out); in += lenW;
04451             if ( *((WORD *)out) == -AO.mpower ) *((WORD *)out) = -MAXPOWER;
04452             out += sizeof(WORD); /* minpower */
04453             AO.ResizeWORD(in, out); in += lenW;
04454             if ( *((WORD *)out) == AO.mpower ) *((WORD *)out) = MAXPOWER;
04455             out += sizeof(WORD); /* maxpower */
04456             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* complex */
04457             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* number */
04458             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* flags */
04459             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* node */
04460             AO.ResizeWORD(in, out); in += lenW; /* namesize */
04461             realnamelen = *((WORD *)out);
04462             realnamelen += sizeof(void *)-1; realnamelen &= -(sizeof(void *));
04463             out += sizeof(WORD);
04464             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* dimension */
04465             while ( in < pp ) {
04466                 AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD);
04467             }
04468             namelen = *((WORD *)out-1); /* cares for padding "bug" */
04469             if ( end - in < namelen ) {
04470                 goto RSVEnd;
04471             }
04472             *((WORD *)out-1) = realnamelen;
04473             *size += AO.SaveHeader.sSym + namelen;
04474             *outsize += sizeof(struct SyMb01) + realnamelen;
04475             if ( realnamelen > namelen ) {
04476                 int j = namelen;
04477                 NCOPYB(out, in, j);
04478                 out += realnamelen - namelen;
04479             }
04480             else {
04481                 int j = realnamelen;
04482                 NCOPYB(out, in, j);
04483                 in += namelen - realnamelen;
04484             }
04485             ++numReadSym;
04486             continue;

```

```

04487     }
04488     /* Indices */
04489     if ( *stage == 1 ) {
04490         if ( ind->nindices <= numReadInd ) {
04491             ++stage;
04492             continue;
04493         }
04494         if ( end - in < AO.SaveHeader.sInd ) {
04495             goto RSVEnd;
04496         }
04497         if ( flip ) {
04498             pp = in;
04499             AO.FlipLONG(pp); pp += lenL;
04500             while ( pp < in + AO.SaveHeader.sInd ) {
04501                 AO.FlipWORD(pp); pp += lenW;
04502             }
04503         }
04504         pp = in + AO.SaveHeader.sInd;
04505         AO.ResizeLONG(in, out); in += lenL; out += sizeof(LONG); /* name */
04506         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* type */
04507         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* dimension */
04508         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* number */
04509         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* flags */
04510         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* nmin4 */
04511         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* node */
04512         AO.ResizeWORD(in, out); in += lenW; /* namesize */
04513         realnamelen = *((WORD *)out);
04514         realnamelen += sizeof(void *)-1; realnamelen &= -(sizeof(void *));
04515         out += sizeof(WORD);
04516         while ( in < pp ) {
04517             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD);
04518         }
04519         namelen = *((WORD *)out-1); /* cares for padding "bug" */
04520         if ( end - in < namelen ) {
04521             goto RSVEnd;
04522         }
04523         *((WORD *)out-1) = realnamelen;
04524         *size += AO.SaveHeader.sInd + namelen;
04525         *outsiz += sizeof(struct InDeX) + realnamelen;
04526         if ( realnamelen > namelen ) {
04527             int j = namelen;
04528             NCOPYB(out, in, j);
04529             out += realnamelen - namelen;
04530         }
04531         else {
04532             int j = realnamelen;
04533             NCOPYB(out, in, j);
04534             in += namelen - realnamelen;
04535         }
04536         ++numReadInd;
04537         continue;
04538     }
04539     /* Vectors */
04540     if ( *stage == 2 ) {
04541         if ( ind->nvectors <= numReadVec ) {
04542             ++stage;
04543             continue;
04544         }
04545         if ( end - in < AO.SaveHeader.sVec ) {
04546             goto RSVEnd;
04547         }
04548         if ( flip ) {
04549             pp = in;
04550             AO.FlipLONG(pp); pp += lenL;
04551             while ( pp < in + AO.SaveHeader.sVec ) {
04552                 AO.FlipWORD(pp); pp += lenW;
04553             }
04554         }
04555         pp = in + AO.SaveHeader.sVec;
04556         AO.ResizeLONG(in, out); in += lenL; out += sizeof(LONG); /* name */
04557         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* complex */
04558         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* number */
04559         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* flags */
04560         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* node */
04561         AO.ResizeWORD(in, out); in += lenW; /* namesize */
04562         realnamelen = *((WORD *)out);
04563         realnamelen += sizeof(void *)-1; realnamelen &= -(sizeof(void *));
04564         out += sizeof(WORD);
04565         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* dimension */
04566         while ( in < pp ) {
04567             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD);
04568         }
04569         namelen = *((WORD *)out-1); /* cares for padding "bug" */
04570         if ( end - in < namelen ) {
04571             goto RSVEnd;
04572         }
04573         *((WORD *)out-1) = realnamelen;

```

```

04574         *size += AO.SaveHeader.sVec + namelen;
04575         *outsize += sizeof(struct VeCtOr) + realnamelen;
04576         if ( realnamelen > namelen ) {
04577             int j = namelen;
04578             NCOPYB(out, in, j)
04579             out += realnamelen - namelen;
04580         }
04581         else {
04582             int j = realnamelen;
04583             NCOPYB(out, in, j)
04584             in += namelen - realnamelen;
04585         }
04586         ++numReadVec;
04587         continue;
04588     }
04589     /* Functions */
04590     if ( *stage == 3 ) {
04591         if ( ind->nfunctions <= numReadFun ) {
04592             ++*stage;
04593             continue;
04594         }
04595         if ( end - in < AO.SaveHeader.sFun ) {
04596             goto RSVEnd;
04597         }
04598         if ( flip ) {
04599             pp = in;
04600             AO.FlipPOINTER(pp); pp += lenP;
04601             AO.FlipLONG(pp); pp += lenL;
04602             AO.FlipLONG(pp); pp += lenL;
04603             while ( pp < in + AO.SaveHeader.sFun ) {
04604                 AO.FlipWORD(pp); pp += lenW;
04605             }
04606         }
04607         pp = in + AO.SaveHeader.sFun;
04608         outbuf = out;
04609         AO.ResizePOINTER(in, out); in += lenP; out += sizeof(void *); /* tabl */
04610         AO.ResizeLONG(in, out); in += lenL; out += sizeof(LONG); /* symminfo */
04611         AO.ResizeLONG(in, out); in += lenL; out += sizeof(LONG); /* name */
04612         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* commute */
04613         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* complex */
04614         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* number */
04615         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* flags */
04616         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* spec */
04617         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* symmetric */
04618         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* numargs */
04619         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* node */
04620         AO.ResizeWORD(in, out); in += lenW; /* namesize */
04621         realnamelen = *((WORD *)out);
04622         realnamelen += sizeof(void *)-1; realnamelen &= -(sizeof(void *));
04623         out += sizeof(WORD);
04624         AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD); /* dimension */
04625         while ( in < pp ) {
04626             AO.ResizeWORD(in, out); in += lenW; out += sizeof(WORD);
04627         }
04628         namelen = *((WORD *)out-1); /* cares for padding "bug" */
04629         if ( end - in < namelen ) {
04630             goto RSVEnd;
04631         }
04632         *((WORD *)out-1) = realnamelen;
04633         *size += AO.SaveHeader.sFun + namelen;
04634         *outsize += sizeof(struct FuNcTiOn) + realnamelen;
04635         if ( realnamelen > namelen ) {
04636             int j = namelen;
04637             NCOPYB(out, in, j);
04638             out += realnamelen - namelen;
04639         }
04640         else {
04641             int j = realnamelen;
04642             NCOPYB(out, in, j);
04643             in += namelen - realnamelen;
04644         }
04645         ++numReadFun;
04646         /* we use the information whether a function is tensorial later in ReadSaveTerm */
04647         AO.tensorList[ ((FUNCTIONS)outbuf)->number+FUNCTION ] =
04648             (UBYTE)((FUNCTIONS)outbuf)->spec == TENSORFUNCTION);
04649         continue;
04650     }
04651     /* handle numdummies */
04652     if ( end - in >= lenW ) {
04653         if ( flip ) AO.FlipWORD(in);
04654         AO.ResizeWORD(in, out);
04655         *size += lenW;
04656         *outsize += sizeof(WORD);
04657     }
04658     /* handle numfactors */
04659     if ( end - in >= lenW ) {
04660         if ( flip ) AO.FlipWORD(in);

```

```

04661         AO.ResizeWORD(in, out);
04662         *size += lenW;
04663         *outsize += sizeof(WORD);
04664     }
04665     /* handle vflags */
04666     if ( end - in >= lenW ) {
04667         if ( flip ) AO.FlipWORD(in);
04668         AO.ResizeWORD(in, out);
04669         *size += lenW;
04670         *outsize += sizeof(WORD);
04671     }
04672     /* handle uflags */
04673     if ( end - in >= lenW ) {
04674         if ( flip ) AO.FlipWORD(in);
04675         AO.ResizeWORD(in, out);
04676         *size += lenW;
04677         *outsize += sizeof(WORD);
04678     }
04679     return ( 0 );
04680 }
04681
04682 RSVEnd:
04683     /* we are here because the remaining buffer cannot hold the next
04684     struct. we position the file behind the last successfully translated
04685     struct and return. */
04686     ADDPOS(pos, *size);
04687     SeekFile(AO.SaveData.Handle, &pos, SEEK_SET);
04688     return ( 0 );
04689 } else {
04690     return ( ReadFile(AO.SaveData.Handle, buffer, *size) != *size );
04691 }
04692 }
04693
04694 /*
04695     #] ReadSaveVariables :
04696     #[ ReadSaveTerm :
04697 */
04698
04727 UBYTE *
04728 ReadSaveTerm32(UBYTE *bin, UBYTE *binend, UBYTE **bout, UBYTE *boutend, UBYTE *top, int terminbuf)
04729 {
04730     GETIDENTITY
04731
04732     UBYTE *boutbuf;
04733     int32_t len, j, id;
04734     int32_t *r, *t, *coeff, *end, *newtermsize, *rend;
04735     int32_t *newsubtermp;
04736     int32_t *in = (int32_t *)bin;
04737     int32_t *out = (int32_t *)*bout;
04738
04739     /* if called recursively the term is already decompressed in buffer.
04740     is this the case? */
04741     if ( terminbuf ) {
04742         /* don't do any decompression, just adjust the pointers */
04743         len = *out;
04744         end = out + len;
04745         r = in + 1;
04746         rend = (int32_t *)boutend;
04747         coeff = end - ABS(*end-1);
04748         newtermsize = (int32_t *)*bout;
04749         out = newtermsize + 1;
04750     }
04751     else {
04752         /* do decompression of necessary. always return if the space in the
04753         buffer is not sufficient */
04754         int32_t rbuf;
04755         r = (int32_t *)AR.CompressBuffer;
04756         rbuf = *r;
04757         len = j = *in;
04758         /* first copy from AR.CompressBuffer if necessary */
04759         if ( j < 0 ) {
04760             ++in;
04761             if ( (UBYTE *)in >= binend ) {
04762                 return ( bin );
04763             }
04764             *out = len = -j + 1 + *in;
04765             end = out + *out;
04766             if ( (UBYTE *)end >= top ) {
04767                 return ( bin );
04768             }
04769             ++out;
04770             *r++ = len;
04771             while ( ++j <= 0 ) {
04772                 int32_t bb = *r++;
04773                 *out++ = bb;
04774             }
04775             j = *in++;

```

```

04776     }
04777     else if ( j == 0 ) {
04778         /* care for padding words */
04779         while ( (UBYTE *)in < binend ) {
04780             *out++ = 0;
04781             if ( (UBYTE *)out > top ) {
04782                 return ( (UBYTE *)bin );
04783             }
04784
04785             *r++ = 0;
04786             ++in;
04787         }
04788         *bout = (UBYTE *)out;
04789         return ( (UBYTE *)in );
04790     }
04791     else {
04792         end = out + len;
04793         if ( (UBYTE *)end >= top ) {
04794             return ( bin );
04795         }
04796     }
04797     if ( (UBYTE *)in + j >= binend ) {
04798         *AR.CompressBuffer = rbuf;
04799         return ( bin );
04800     }
04801     if ( (UBYTE *)out + j >= top ) {
04802         return ( bin );
04803     }
04804     /* second copy from input buffer */
04805     while ( --j >= 0 ) {
04806         int32_t bb = *in++;
04807         *r++ = *out++ = bb;
04808     }
04809
04810     rend = r;
04811     r = (int32_t *)AR.CompressBuffer + 1;
04812     coeff = end - ABS(*end-1);
04813     newtermsize = (int32_t *)*bout;
04814     out = newtermsize + 1;
04815 }
04816
04817 /* iterate over subterms */
04818 while ( out < coeff ) {
04819
04820     id = *out++;
04821     ++r;
04822     t = out + *out - 1;
04823     newsubtermp = out;
04824     ++out; ++r;
04825
04826     if ( id == SYMBOL ) {
04827         while ( out < t ) {
04828             ++out; ++r; /* symbol number */
04829             /* if exponent is too big, rewrite as exponent function */
04830             if ( ABS(*out) >= MAXPOWER ) {
04831                 int32_t *a, *b;
04832                 int32_t n;
04833                 int32_t num = *(out-1);
04834                 int32_t exp = *out;
04835                 coeff += 9;
04836                 end += 9;
04837                 t += 9;
04838                 if ( (UBYTE *)end > top ) return ( bin );
04839                 out -= 3;
04840                 *out++ = EXPONENT; /* id */
04841                 *out++ = 13; /* size */
04842                 *out++ = 1; /* dirtyflag */
04843                 *out++ = -SYMBOL; /* first short arg */
04844                 *out++ = num;
04845                 *out++ = 8; /* second arg, size */
04846                 *out++ = 0; /* dirtyflag */
04847                 *out++ = 6; /* term size */
04848                 *out++ = ABS(exp) & 0x000FFFFF;
04849                 *out++ = ABS(exp) » 16;
04850                 *out++ = 1;
04851                 *out++ = 0;
04852                 *out++ = ( exp < 0 ) ? -5 : 5;
04853                 a = ++r;
04854                 b = out;
04855                 n = rend - r;
04856                 NCOPYI32(b, a, n)
04857             }
04858             else {
04859                 ++out; ++r;
04860             }
04861         }
04862     }

```



```

04863     else if ( id == DOTPRODUCT ) {
04864         while ( out < t ) {
04865             AO.RenumberVec((UBYTE *)out); /* vector 1 */
04866             ++out; ++r;
04867             AO.RenumberVec((UBYTE *)out); /* vector 2 */
04868             ++out; ++r;
04869             /* if exponent is too big, rewrite as exponent function */
04870             if ( ABS(*out) >= MAXPOWER ) {
04871                 int32_t *a, *b;
04872                 int32_t n;
04873                 int32_t num1 = *(out-2);
04874                 int32_t num2 = *(out-1);
04875                 int32_t exp = *out;
04876                 coeff += 17;
04877                 end += 17;
04878                 t += 17;
04879                 if ( (UBYTE *)end > top ) return ( bin );
04880                 out -= 4;
04881                 *out++ = EXPONENT;      /* id */
04882                 *out++ = 22;            /* size */
04883                 *out++ = 1;             /* dirtyflag */
04884                 *out++ = 11;            /* first arg, size */
04885                 *out++ = 0;             /* dirtyflag */
04886                 *out++ = 9;             /* term size */
04887                 *out++ = DOTPRODUCT;    /* p1.p2 */
04888                 *out++ = 5;             /* subterm size */
04889                 *out++ = num1;          /* p1 */
04890                 *out++ = num2;          /* p2 */
04891                 *out++ = 1;             /* exponent */
04892                 *out++ = 1;             /* coeff */
04893                 *out++ = 1;
04894                 *out++ = 3;
04895                 *out++ = 8;             /* second arg, size */
04896                 *out++ = 0;             /* dirtyflag */
04897                 *out++ = 6;             /* term size */
04898                 *out++ = ABS(exp) & 0x000FFFF;
04899                 *out++ = ABS(exp) » 16;
04900                 *out++ = 1;
04901                 *out++ = 0;
04902                 *out++ = ( exp < 0 ) ? -5 : 5;
04903                 a = ++r;
04904                 b = out;
04905                 n = rend - r;
04906                 NCOPYI32(b, a, n)
04907             }
04908             else {
04909                 ++out; ++r;
04910             }
04911         }
04912     }
04913     else if ( id == VECTOR ) {
04914         while ( out < t ) {
04915             AO.RenumberVec((UBYTE *)out); /* vector number */
04916             ++out; ++r;
04917             ++out; ++r; /* index, do nothing */
04918         }
04919     }
04920     else if ( id == INDEX ) {
04921         /* int32_t vectoroffset = -2 * *((int32_t *)AO.SaveHeader.wildoffset); */
04922         void *dummy = (void *)AO.SaveHeader.wildoffset; /* to remove a warning about
strict-aliasing rules in gcc */
04923         int32_t vectoroffset = -2 * *((int32_t *)dummy);
04924         while ( out < t ) {
04925             /* if there is a vector, renumber it */
04926             if ( *out < vectoroffset ) {
04927                 AO.RenumberVec((UBYTE *)out);
04928             }
04929             ++out; ++r;
04930         }
04931     }
04932     else if ( id == SUBEXPRESSION ) {
04933         /* nothing to translate */
04934         while ( out < t ) {
04935             ++out; ++r;
04936         }
04937     }
04938     else if ( id == DELTA ) {
04939         /* nothing to translate */
04940         r += t - out;
04941         out = t;
04942     }
04943     else if ( id == HAAKJE ) {
04944         /* nothing to translate */
04945         r += t - out;
04946         out = t;
04947     }
04948     else if ( id == GAMMA || id == LEVICIVITA || (id >= FUNCTION && AO.tensorList[id]) ) {

```

```

04949 /*      int32_t vectoroffset = -2 * *((int32_t *)AO.SaveHeader.wildoffset); */
04950 void *dummy = (void *)AO.SaveHeader.wildoffset; /* to remove a warning about
strict-aliasing rules in gcc */
04951 int32_t vectoroffset = -2 * *((int32_t *)dummy);
04952 while ( out < t ) {
04953     /* if there is a vector as an argument, renumber it */
04954     if ( *out < vectoroffset ) {
04955         AO.RenumberVec((UBYTE *)out);
04956     }
04957     ++out; ++r;
04958 }
04959 }
04960 else if ( id >= FUNCTION ) {
04961     int32_t *argEnd;
04962     UBYTE *newbin;
04963
04964     ++out; ++r; /* dirty flags */
04965
04966     /* loop over arguments */
04967     while ( out < t ) {
04968         if ( *out < 0 ) {
04969             /* short notation arguments */
04970             switch ( -*out ) {
04971                 case SYMBOL:
04972                     ++out; ++r;
04973                     ++out; ++r;
04974                     break;
04975                 case SNUMBER:
04976                     argEnd = out+2;
04977                     ++out; ++r;
04978                     if ( sizeof(WORD) == 2 ) {
04979                         /* resize if needed */
04980                         if ( *out > (1<15)-1 || *out < -(1<15)+1 ) {
04981                             int32_t *a, *b;
04982                             int32_t n;
04983                             int32_t num = *out;
04984                             coeff += 6;
04985                             end += 6;
04986                             argEnd += 6;
04987                             t += 6;
04988                             if ( (UBYTE *)end > top ) return ( bin );
04989                             --out;
04990                             *out++ = 8;          /* argument size */
04991                             *out++ = 0;          /* dirtyflag */
04992                             *out++ = 6;          /* term size */
04993                             *out++ = ABS(num) & 0x0000FFFF;
04994                             *out++ = ABS(num) >> 16;
04995                             *out++ = 1;
04996                             *out++ = 0;
04997                             *out++ = ( num < 0 ) ? -5 : 5;
04998                             a = ++r;
04999                             b = out;
05000                             n = rend - r;
05001                             NCOPYI32(b, a, n)
05002                         }
05003                     }
05004                     else {
05005                         ++out; ++r;
05006                     }
05007                 }
05008             }
05009             break;
05010         case VECTOR:
05011             ++out; ++r;
05012             AO.RenumberVec((UBYTE *)out);
05013             ++out; ++r;
05014             break;
05015         case INDEX:
05016             ++out; ++r;
05017             ++out; ++r;
05018             break;
05019         case MINVECTOR:
05020             ++out; ++r;
05021             AO.RenumberVec((UBYTE *)out);
05022             ++out; ++r;
05023             break;
05024         default:
05025             if ( -*out >= FUNCTION ) {
05026                 ++out; ++r;
05027                 break;
05028             }
05029             else {
05030                 MesPrint("short function code %d not implemented.", *out);
05031                 return ( (UBYTE *)in );
05032             }
05033     }
05034 }

```

```

05035         else {
05036             /* long arguments */
05037             int32_t *newargsize = out;
05038             argEnd = out + *out;
05039             ++out; ++r;
05040             ++out; ++r; /* dirty flags */
05041             while ( out < argEnd ) {
05042                 int32_t *keepsizes = out + *out;
05043                 int32_t lenbuf = *out;
05044                 int32_t **ppp = &out; /* to avoid a compiler warning */
05045                 /* recursion */
05046                 newbin = ReadSaveTerm32((UBYTE *)r, binend, (UBYTE **)ppp, (UBYTE *)rend, top,
1);
05047                 r += lenbuf;
05048                 if ( newbin == (UBYTE *)r ) {
05049                     return ( (UBYTE *)in );
05050                 }
05051                 /* if the term done by recursion has changed in size,
05052                    we need to move the rest of the data accordingly */
05053                 if ( out > keepsizes ) {
05054                     int32_t *a, *b;
05055                     int32_t n;
05056                     int32_t extention = out - keepsizes;
05057                     a = r;
05058                     b = out;
05059                     n = rend - r;
05060                     NCOPYI32(b, a, n)
05061                     coeff += extention;
05062                     end += extention;
05063                     argEnd += extention;
05064                     t += extention;
05065                 }
05066                 else if ( out < keepsizes ) {
05067                     int32_t *a, *b;
05068                     int32_t n;
05069                     int32_t extention = keepsizes - out;
05070                     a = keepsizes;
05071                     b = out;
05072                     n = rend - r;
05073                     NCOPYI32(b, a, n)
05074                     coeff -= extention;
05075                     end -= extention;
05076                     argEnd -= extention;
05077                     t -= extention;
05078                 }
05079             }
05080             *newargsize = out - newargsize;
05081         }
05082     }
05083 }
05084 else {
05085     MesPrint("ID %d not recognized.", id);
05086     return ( (UBYTE *)in );
05087 }
05088
05089 *newsubterm = out - newsubterm + 1;
05090 }
05091
05092 if ( (UBYTE *)end >= top ) {
05093     return ( bin );
05094 }
05095
05096 /* do coefficient and adjust term size */
05097 boutbuf = *bout;
05098 *bout = (UBYTE *)out;
05099
05100 ResizeCoeff32(bout, (UBYTE *)end, top);
05101
05102 if ( *bout >= top ) {
05103     *bout = boutbuf;
05104     return ( bin );
05105 }
05106
05107 *newtermsize = (int32_t *)*bout - newtermsize;
05108
05109 return ( (UBYTE *)in );
05110 }
05111
05112 /*
05113     #] ReadSaveTerm :
05114     #[ ReadSaveExpression :
05115 */
05116
05138 LONG ReadSaveExpression(UBYTE *buffer, UBYTE *top, LONG *size, LONG *outsize)
05139 {
05140     if ( AO.transFlag ) {
05141         UBYTE *in, *end, *out, *outend, *p;

```

```

05142     POSITION pos;
05143     LONG half;
05144     WORD lenW = AO.SaveHeader.lenWORD;
05145
05146     /* remember the last file position in case an expression cannot be
05147        fully processed */
05148     TELLFILE(AO.SaveData.Handle,&pos);
05149
05150     /* adjust 'size' depending on whether the translated data is bigger or
05151        smaller */
05152     half = (top-buffer)/2;
05153     if ( *size > half ) *size = half;
05154     if ( lenW < (WORD)sizeof(WORD) ) {
05155         if ( *size * (LONG)sizeof(WORD)/lenW > half ) *size = half*lenW/(LONG)sizeof(WORD);
05156     }
05157     else {
05158         if ( *size > half ) *size = half;
05159     }
05160
05161     /* depending on the necessary resizing we position the input pointer
05162        either at the start of the buffer or in the middle. if the data will
05163        roughly remain the same size, we need only one processing step, so
05164        we put the 'in' at the middle and 'out' and the beginning. in the
05165        other cases we need two processing steps, so first we put 'in' at
05166        the beginning and write at the middle. the second step can then read
05167        from the middle and put its results at the beginning. */
05168     in = out = buffer;
05169     if ( lenW == sizeof(WORD) ) in += half;
05170     else out += half;
05171     end = in + *size;
05172     outend = out + *size;
05173
05174     if ( ReadFile(AO.SaveData.Handle, in, *size) != *size ) {
05175         return ( MesPrint("Error(3) reading stored expression.") );
05176     }
05177
05178     if ( AO.transFlag & 1 ) {
05179         p = in;
05180         end -= lenW;
05181         while ( p <= end ) {
05182             AO.FlipWORD(p); p += lenW;
05183         }
05184         end += lenW;
05185     }
05186
05187     if ( lenW > (WORD)sizeof(WORD) ) {
05188         /* renumber first */
05189         do {
05190             outend = out+*size;
05191             if ( outend > top ) outend = top;
05192             p = ReadSaveTerm32(in, end, &out, outend, top, 0);
05193             if ( p == in ) break;
05194             in = p;
05195         } while ( in <= end - lenW );
05196         /* then resize */
05197         *size = in - buffer;
05198         in = buffer + half;
05199         end = out;
05200         out = buffer;
05201
05202         while ( in < end ) {
05203             /* resize without checking */
05204             AO.ResizeNCWORD(in, out);
05205             in += lenW; out += sizeof(WORD);
05206         }
05207     }
05208     else {
05209         if ( lenW < (WORD)sizeof(WORD) ) {
05210             /* resize first */
05211             while ( in < end ) {
05212                 AO.ResizeWORD(in, out);
05213                 in += lenW; out += sizeof(WORD);
05214             }
05215             in = buffer + half;
05216             end = out;
05217             out = buffer;
05218         }
05219         /* then renumber */
05220         do {
05221             p = ReadSaveTerm32(in, end, &out, buffer+half, buffer+half, 0);
05222             if ( p == in ) break;
05223             in = p;
05224         } while ( in <= end - sizeof(WORD) );
05225         *size = (in - buffer - half) * lenW / (ULONG)sizeof(WORD);
05226     }
05227     *outsize = out - buffer;
05228     ADDPOS(pos, *size);

```

```

05229         SeekFile(AO.SaveData.Handle, &pos, SEEK_SET);
05230
05231         return ( 0 );
05232     }
05233     else {
05234         return ( ReadFile(AO.SaveData.Handle, buffer, *size) != *size );
05235     }
05236 }
05237
05238 /*
05239     #] ReadSaveExpression :
05240     #] System Independent Saved Expressions :
05241 */

```

4.139 structs.h File Reference

This graph shows which files directly or indirectly include this file:



Data Structures

- struct [PoSiTiOn](#)
- struct [STOREHEADER](#)
- struct [InDeXeNtRy](#)
- struct [FiLeInDeX](#)
- struct [FiLeDaTa](#)
- struct [VaRrEnUm](#)
- struct [ReNuMbEr](#)
- struct [LIST](#)
- struct [KEYWORD](#)
- struct [KEYWORDV](#)
- struct [NaMeNode](#)
- struct [NaMeTree](#)
- struct [tree](#)
- struct [MiNmAx](#)
- struct [BrAcKeTiNdEx](#)
- struct [BrAcKeTiNfO](#)
- struct [TaBIes](#)
- struct [ExPrEsSiOn](#)
- struct [SyMbOl](#)
- struct [InDeX](#)
- struct [VeCtOr](#)
- struct [FuNcTiOn](#)
- struct [SeTs](#)
- struct [DuBiOuS](#)
- struct [FaCdOILaR](#)
- struct [DoLIaRS](#)
- struct [MoDoPtDoLIaRS](#)
- struct [fixedset](#)
- struct [TaBIeBaEsUbInDeX](#)
- struct [TaBIeBaEsE](#)
- struct [FUN_INFO](#)
- struct [PaRtlcLe](#)

- struct [VeRtEx](#)
- struct [MoDeL](#)
- struct [NaMeSpAcE](#)
- struct [FiLe](#)
- struct [StreaM](#)
- struct [SpecTatoR](#)
- struct [TrAcEs](#)
- struct [TrAcEn](#)
- struct [pReVaR](#)
- struct [INSIDEINFO](#)
- struct [PRELOAD](#)
- struct [PROCEDURE](#)
- struct [DoLoOp](#)
- struct [bit_field](#)
- struct [HANDLERS](#)
- struct [CbUf](#)
- struct [ChAnNeL](#)
- struct [SETUPPARAMETERS](#)
- struct [NeStInG](#)
- struct [StOrEcAcHe](#)
- struct [PeRmUtE](#)
- struct [PeRmUtEp](#)
- struct [DiStRiBuTe](#)
- struct [PaRtl](#)
- struct [sOrT](#)
- struct [POLYMOD](#)
- struct [SHvariables](#)
- struct [COST](#)
- struct [MODNUM](#)
- struct [OPTIMIZE](#)
- struct [OPTIMIZERESULT](#)
- struct [DICTIONARY_ELEMENT](#)
- struct [DICTIONARY](#)
- struct [SWITCHTABLE](#)
- struct [SWITCH](#)
- struct [TERMINFO](#)
- struct [M_const](#)
- struct [P_const](#)
- struct [C_const](#)
- struct [S_const](#)
- struct [R_const](#)
- struct [T_const](#)
- struct [N_const](#)
- struct [O_const](#)
- struct [X_const](#)
- struct [AllGlobals](#)
- struct [FixedGlobals](#)

Macros

- #define [INFILEINDEX](#) ((512-2*sizeof([POSITION](#)))/sizeof([INDEXENTRY](#)))
- #define [EMPTYININDEX](#) (512-2*sizeof([POSITION](#))-[INFILEINDEX](#)*sizeof([INDEXENTRY](#)))
- #define [PHEAD](#)
- #define [PHEAD0](#) void
- #define [BHEAD](#)
- #define [BHEAD0](#)

Typedefs

- typedef struct [PoSiTiOn](#) **POSITION**
- typedef struct [InDeXeNtRy](#) **INDEXENTRY**
- typedef struct [FiLeInDeX](#) **FILEINDEX**
- typedef struct [FiLeDaTa](#) **FILEDATA**
- typedef struct [VaRrEnUm](#) **VARRENUM**
- typedef struct [ReNuMbEr](#) * **RENUMBER**
- typedef struct [NaMeNode](#) **NAMENODE**
- typedef struct [NaMeTree](#) **NAMETREE**
- typedef struct [tree](#) **COMPTREE**
- typedef struct [MiNmAx](#) **MINMAX**
- typedef struct [BrAcKeTiNdEx](#) **BRACKETINDEX**
- typedef struct [BrAcKeTiNfO](#) **BRACKETINFO**
- typedef struct [TaBIes](#) * **TABLES**
- typedef struct [ExPrEsSiOn](#) * **EXPRESSIONS**
- typedef struct [SyMbOl](#) * **SYMBOLS**
- typedef struct [InDeX](#) * **INDICES**
- typedef struct [VeCtOr](#) * **VECTORS**
- typedef struct [FuNcTiOn](#) * **FUNCTIONS**
- typedef struct [SeTs](#) * **SETS**
- typedef struct [DuBiOuS](#) * **DUBIOUSV**
- typedef struct [FaCdOILaR](#) **FACDOLLAR**
- typedef struct [DoLIaRs](#) * **DOLLARS**
- typedef struct [MoDoPtDoLIaRs](#) **MODEPTDOLLAR**
- typedef struct [fixedset](#) **FIXEDSET**
- typedef struct [TaBIEbAsEsUblnDeX](#) **TABLEBASESUBINDEX**
- typedef struct [TaBIEbAsE](#) **TABLEBASE**
- typedef struct [PaRtlcLe](#) **PARTICLE**
- typedef struct [VeRtEx](#) **VERTEX**
- typedef struct [MoDeL](#) **MODEL**
- typedef struct [NaMeSpAcE](#) **NAMESPACE**
- typedef struct [FiLe](#) **FILEHANDLE**
- typedef struct [StreaM](#) **STREAM**
- typedef struct [SpecTatoR](#) **SPECTATOR**
- typedef struct [TrAcEs](#) **TRACES**
- typedef struct [TrAcEn](#) * **TRACEN**
- typedef struct [pReVaR](#) **PREVAR**
- typedef struct [DoLoOp](#) **DOLOOP**
- typedef struct [bit_field](#) [set_of_char](#)[32]
- typedef struct [bit_field](#) * [one_byte](#)
- typedef int(* [FINISHUFFLE](#)) (WORD *)
- typedef int(* [DO_UFFLE](#)) (WORD *, WORD, WORD, WORD)
- typedef WORD(* [COMPAREDUMMY](#)) (WORD *, WORD *, WORD)
- typedef struct [CbUf](#) **CBUF**
- typedef struct [ChAnNeL](#) **CHANNEL**
- typedef struct [NeStInG](#) * **NESTING**
- typedef struct [StOrEcAcHe](#) * **STORECACHE**
- typedef struct [PeRmUtE](#) **PERM**
- typedef struct [PeRmUtEp](#) **PERMP**
- typedef struct [DiStRiBuTe](#) **DISTRIBUTE**
- typedef struct [PaRtl](#) **PARTI**
- typedef struct [sOrT](#) **SORTING**
- typedef struct [AllGlobals](#) **ALLGLOBALS**
- typedef int(* [WCN](#)) ()
- typedef int(* [WCN2](#)) ()
- typedef WORD(* [COMPARE](#)) (PHEAD WORD *, WORD *, WORD)
- typedef struct [FixedGlobals](#) **FIXEDGLOBALS**

Functions

- **STATIC_ASSERT** (sizeof([STOREHEADER](#))==512)
- **STATIC_ASSERT** (sizeof([FILEINDEX](#))==512)

4.139.1 Detailed Description

Contains definitions for global structs.

!!!CAUTION!!! Changes in this file will most likely have consequences for the recovery mechanism (see [checkpoint.c](#)). You need to care for the code in [checkpoint.c](#) as well and modify the code there accordingly!

The marker [D] is used in comments in this file to mark pointers to which dynamically allocated memory is assigned by a call to malloc() during runtime (in contrast to pointers that point into already allocated memory). This information is especially helpful if one needs to know which pointers need to be freed (cf. [checkpoint.c](#)).

Definition in file [structs.h](#).

4.139.2 Macro Definition Documentation

4.139.2.1 INFILEINDEX

```
#define INFILEINDEX ((512-2*sizeof(POSITION))/sizeof(INDEXENTRY))
```

Maximum number of entries (struct [InDeXeNtRy](#)) in a file index (struct [FiLeInDeX](#)). Number is calculated such that the size of a file index is no more than 512 bytes.

Definition at line 118 of file [structs.h](#).

4.139.2.2 EMPTYININDEX

```
#define EMPTYININDEX (512-2*sizeof(POSITION)-INFILEINDEX*sizeof(INDEXENTRY))
```

Number of empty filling bytes for a file index (struct [FiLeInDeX](#)). It is calculated such that the size of a file index is always 512 bytes.

Definition at line 123 of file [structs.h](#).

4.139.2.3 PHEAD

```
#define PHEAD
```

Definition at line 2494 of file [structs.h](#).

4.139.2.4 PHEAD0

```
#define PHEAD0 void
```

Definition at line 2495 of file [structs.h](#).

4.139.2.5 BHEAD

```
#define BHEAD
```

Definition at line 2496 of file [structs.h](#).

4.139.2.6 BHEAD0

```
#define BHEAD0
```

Definition at line 2497 of file [structs.h](#).

4.139.3 Typedef Documentation

4.139.3.1 INDEXENTRY

```
typedef struct InDeXeNtRy INDEXENTRY
```

Defines the structure of an entry in a file index (see struct [FiLeInDeX](#)).

It represents one expression in the file.

4.139.3.2 FILEINDEX

```
typedef struct FiLeInDeX FILEINDEX
```

Defines the structure of a file index in store-files and save-files.

It contains several entries (see struct [InDeXeNtRy](#)) up to a maximum of [INFILEINDEX](#).

The variable number has been made of type POSITION to avoid padding problems with some types of computers/↔ OS and keep system independence of the .sav files.

This struct is always 512 bytes long.

4.139.3.3 VARRENUM

```
typedef struct VaRrEnUm VARRENUM
```

Contains the pointers to an array in which a binary search will be performed.

4.139.3.4 RENUMBER

```
typedef struct ReNuMbEr * RENUMBER
```

Only symb.lo gets dynamically allocated. All other pointers points into this memory.

4.139.3.5 NAMENODE

```
typedef struct NaMeNode NAMENODE
```

The names of variables are kept in an array. Elements of type [NAMENODE](#) define a tree (that is kept balanced) that make it easy and fast to look for variables. See also [NAMETREE](#).

4.139.3.6 NAMETREE

```
typedef struct NaMeTree NAMETREE
```

A struct of type [NAMETREE](#) controls a complete (balanced) tree of names for the compiler. The compiler maintains several of such trees and the system has been set up in such a way that one could define more of them if we ever want to work with local name spaces.

4.139.3.7 COMPTREE

```
typedef struct tree COMPTREE
```

The subexpressions in the compiler are kept track of in a (balanced) tree to reduce the need for subexpressions and hence save much space in large rhs expressions (like when we have xxxxxx occurrences of objects like $f(x+1, x+1)$ in which each $x+1$ becomes a subexpression. The struct that controls this tree is COMPTREE.

4.139.3.8 TABLES

```
typedef struct TaBleS * TABLES
```

buffers, mm, flags, and prototype are always dynamically allocated, tablepointers only if needed (=0 if unallocated), boomlijst and argtail only for sparse tables.

Allocation is done for both the normal and the stub instance (spare), except for prototype and argtail which share memory.

4.139.3.9 FUNCTIONS

```
typedef struct FuNcTiOn * FUNCTIONS
```

Contains all information about a function. Also used for tables. It is used in the [LIST](#) elements of AC.

4.139.3.10 FILEHANDLE

```
typedef struct File FILEHANDLE
```

The type FILEHANDLE is the struct that controls all relevant information of a file, whether it is open or not. The file may even not yet exist. There is a system of caches (PObuffer) and as long as the information to be written still fits inside the cache the file may never be created. There are variables that can store information about different types of files, like scratch files or sort files. Depending on what is available in the system we may also have information about gzip compression (currently sort file only) or locks (TFORM).

4.139.3.11 STREAM

```
typedef struct Stream STREAM
```

Input is read from 'streams' which are represented by objects of type STREAM. A stream can be a file, a do-loop, a procedure, the string value of a preprocessor variable When a new stream is opened we have to keep information about where to fall back in the parent stream to allow this to happen even in the middle of reading names etc as would be the case with a 'b

4.139.3.12 TRACES

```
typedef struct TrAcEs TRACES
```

The struct TRACES keeps track of the progress during the expansion of a 4-dimensional trace. Each time a term gets generated the expansion tree continues in the next statement. When it returns it has to know where to continue. The 4-dimensional traces are more complicated than the n-dimensional traces (see TRACEN) because of the extra tricks that can be used. They are responsible for the shorter final expressions.

4.139.3.13 TRACEN

```
typedef struct TrAcEn * TRACEN
```

The struct TRACEN keeps track of the progress during the expansion of a 4-dimensional trace. Each time a term gets generated the expansion tree continues in the next statement. When it returns it has to know where to continue.

4.139.3.14 PREVAR

```
typedef struct pReVaR PREVAR
```

An element of the type PREVAR is needed for each preprocessor variable.

4.139.3.15 DOLOOP

```
typedef struct DoLoOp DOLOOP
```

Each preprocessor do loop has a struct of type DOLOOP to keep track of all relevant parameters like where the beginning of the loop is, what the boundaries, increment and value of the loop parameter are, etc. Also we keep the whole loop inside a buffer of type [PRELOAD](#)

4.139.3.16 set_of_char

```
typedef struct bit_field set_of_char[32]
```

Used in set_in, set_set, set_del and set_sub.

Definition at line [931](#) of file [structs.h](#).

4.139.3.17 one_byte

```
typedef struct bit_field* one_byte
```

Used in set_in, set_set, set_del and set_sub.

Definition at line 937 of file [structs.h](#).

4.139.3.18 FINISHUFFLE

```
typedef int(* FINISHUFFLE) (WORD *)
```

Definition at line 957 of file [structs.h](#).

4.139.3.19 DO_UFFLE

```
typedef int(* DO_UFFLE) (WORD *, WORD, WORD, WORD)
```

Definition at line 958 of file [structs.h](#).

4.139.3.20 COMPAREDUMMY

```
typedef WORD(* COMPAREDUMMY) (WORD *, WORD *, WORD)
```

Definition at line 963 of file [structs.h](#).

4.139.3.21 CBUF

```
typedef struct CbUf CBUF
```

The CBUF struct is used by the compiler. It is a compiler buffer of which since version 3.0 there can be many.

4.139.3.22 CHANNEL

```
typedef struct ChAnNeL CHANNEL
```

When we read input from text files we have to remember not only their handle but also their name. This is needed for error messages. Hence we call such a file a channel and reserve a struct of type [CHANNEL](#) to allow to lay this link.

4.139.3.23 NESTING

```
typedef struct NeStInG * NESTING
```

The NESTING struct is used when we enter the argument of functions and there is the possibility that we have to change something there. Because functions can be nested we have to keep track of all levels of functions in case we have to move the outer layers to make room for a larger function argument.

4.139.3.24 STORECACHE

```
typedef struct StOrEcAcHe * STORECACHE
```

The struct of type STORECACHE is used by a caching system for reading terms from stored expressions. Each thread should have its own system of caches.

4.139.3.25 PERM

```
typedef struct PeRmUte PERM
```

The struct PERM is used to generate all permutations when the pattern matcher has to try to match (anti)symmetric functions.

4.139.3.26 PERMP

```
typedef struct PeRmUtEp PERMP
```

Like struct PERM but works with pointers.

4.139.3.27 DISTRIBUTE

```
typedef struct DiStRiBuTe DISTRIBUTE
```

The struct DISTRIBUTE is used to help the pattern matcher when matching antisymmetric tensors.

4.139.3.28 PARTI

```
typedef struct PaRtI PARTI
```

The struct PARTI is used to help determining whether a partition_ function can be replaced.

4.139.3.29 SORTING

```
typedef struct sOrT SORTING
```

The struct SORTING is used to control a sort operation. It includes a small and a large buffer and arrays for keeping track of various stages of the (merge) sorts. Each sort level has its own struct and different levels can have different sizes for its arrays. Also different threads have their own set of SORTING structs.

4.139.3.30 ALLGLOBALS

```
typedef struct AllGlobals ALLGLOBALS
```

Without pthreads (FORM) the ALLGLOBALS struct has all the global variables

4.139.3.31 WCN

```
typedef int(* WCN) ()
```

Definition at line 2504 of file [structs.h](#).

4.139.3.32 WCN2

```
typedef int(* WCN2) ()
```

Definition at line 2505 of file [structs.h](#).

4.139.3.33 COMPARE

```
typedef WORD(* COMPARE) (PHEAD WORD *, WORD *, WORD)
```

Definition at line 2508 of file [structs.h](#).

4.139.3.34 FIXEDGLOBALS

```
typedef struct FixedGlobals FIXEDGLOBALS
```

The FIXEDGLOBALS struct is an anachronism. It started as the struct with global variables that needed initialization. It contains the elements Operation and OperaFind which define a very early way of automatically jumping to the proper operation. We find the results of it in parts of the file [opera.c](#). Later operations were treated differently in a more transparent way. We never changed the existing code. The most important part is currently the cTable which is used intensively in the compiler.

4.140 structs.h

[Go to the documentation of this file.](#)

```
00001
00017 /* # [ License : */
00018 /*
00019 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00020 * When using this file you are requested to refer to the publication
00021 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00022 * This is considered a matter of courtesy as the development was paid
00023 * for by FOM the Dutch physics granting agency and we would like to
00024 * be able to track its scientific use to convince FOM of its value
00025 * for the community.
00026 *
00027 * This file is part of FORM.
00028 *
00029 * FORM is free software: you can redistribute it and/or modify it under the
00030 * terms of the GNU General Public License as published by the Free Software
00031 * Foundation, either version 3 of the License, or (at your option) any later
00032 * version.
00033 *
00034 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00035 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00036 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00037 * details.
00038 *
00039 * You should have received a copy of the GNU General Public License along
00040 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00041 */
00042 /* # ] License : */
00043
00044 #ifndef __STRUCTS__
```

```

00045
00046 #define __STRUCTS__
00047 #ifdef _MSC_VER
00048 #include <wchar.h> /* off_t */
00049 #endif
00050
00051 /*
00052     #[ sav&store :
00053 */
00054
00059 typedef struct PoSiTiOn {
00060     off_t pl;
00061 } POSITION;
00062
00063 /* Next are the index structs for stored and saved expressions */
00064
00075 typedef struct {
00076     UBYTE headermark[8];
00077     UBYTE lenWORD;
00078     UBYTE lenLONG;
00079     UBYTE lenPOS;
00080     UBYTE lenPOINTER;
00081     UBYTE endianness[16];
00082     UBYTE sSym;
00083     UBYTE sInd;
00084     UBYTE sVec;
00085     UBYTE sFun;
00086     UBYTE maxpower[16];
00087     UBYTE wilddoffset[16];
00088     UBYTE revision;
00089     UBYTE reserved[512-8-4-16-4-16-16-1];
00090 } STOREHEADER;
00091
00092
00093 STATIC_ASSERT(sizeof(STOREHEADER) == 512);
00094
00100 typedef struct InDeXeNtRy {
00101     POSITION position;
00102     POSITION length;
00103     POSITION variables;
00104     LONG CompressSize;
00105     WORD nsymbols;
00106     WORD nindices;
00107     WORD nvectors;
00108     WORD nfunctions;
00109     WORD size;
00110     SBYTE name[MAXENAME+1];
00111 } INDEXENTRY;
00112
00118 #define INFILEINDEX ((512-2*sizeof(POSITION))/sizeof(INDEXENTRY))
00123 #define EMPTYININDEX (512-2*sizeof(POSITION)-INFILEINDEX*sizeof(INDEXENTRY))
00124
00137 typedef struct FileInDeX {
00138     POSITION next;
00139     POSITION number;
00140     INDEXENTRY expression[INFILEINDEX];
00141     SBYTE empty[EMPTYININDEX];
00142 } FILEINDEX;
00143
00144 STATIC_ASSERT(sizeof(FILEINDEX) == 512);
00145
00150 typedef struct FileDaTa {
00151     FILEINDEX Index;
00152     POSITION Fill;
00153     POSITION Position;
00154     WORD Handle;
00155     WORD dirtyflag;
00156 } FILEDATA;
00157
00164 typedef struct VaRrEnUm {
00165     WORD *start;
00166     WORD *lo;
00167     WORD *hi;
00168 } VARRENUM;
00169
00176 typedef struct ReNuMbEr {
00177     POSITION startposition;
00178     /* First stage renumbering */
00179     VARRENUM symb;
00180     VARRENUM indi;
00181     VARRENUM vect;
00182     VARRENUM func;
00183     /* Second stage renumbering */
00184     WORD *symnum;
00185     WORD *indnum;
00186     WORD *vecnum;
00187     WORD *funnum;
00188 } *RENUMBER;

```

```

00189
00190 /*
00191     #] sav&store :
00192     #[ Variables :
00193 */
00194
00202 typedef struct {
00203     void *lijst;
00204     char *message;
00205     int num;
00206     int maxnum;
00207     int size;
00208     int numglobal;
00209     int numtemp;
00210     int numclear;
00211 } LIST;
00212
00218 typedef struct {
00219     char *name;
00220     TFUN func;
00221     int type;
00222     int flags;
00223 } KEYWORD;
00224
00230 typedef struct {
00231     char *name;
00232     int *var;
00233     int type;
00234     int flags;
00235 } KEYWORDV;
00236
00243 typedef struct NaMeNode {
00244     LONG name;
00245     WORD parent;
00246     WORD left;
00247     WORD right;
00248     WORD balance;
00249     WORD type;
00250     WORD number;
00251 } NAMENODE;
00252
00260 typedef struct NaMeTree {
00261     NAMENODE *namenode;
00262     UBYTE *namebuffer;
00263     LONG nodesize;
00264     LONG nodefill;
00265     LONG namesize;
00266     LONG namefill;
00267     LONG oldnamefill;
00268     LONG oldnodefill;
00269     LONG globalnamefill;
00270     LONG globalnodefill;
00271     LONG clearnamefill;
00272     LONG clearnodefill;
00273     WORD headnode;
00274 } NAMETREE;
00275
00282 typedef struct tree {
00283     int parent;
00284     int left;
00285     int right;
00286     int value;
00287     int blnce;
00288     int usage;
00289 } COMPTREE;
00290
00301 typedef struct MiNmAx {
00302     WORD mini;
00303     WORD maxi;
00304     WORD size;
00305 } MINMAX;
00306
00311 typedef struct BrAcKeTiNdEx { /* For indexing brackets in local expressions */
00312     POSITION start; /* Place where bracket starts - start of expr */
00313     POSITION next; /* Place of next indexed bracket in expr */
00314     LONG bracket; /* Offset of position in bracketbuffer */
00315     LONG termsinbracket;
00316 } BRACKETINDEX;
00317
00322 typedef struct BrAcKeTiNfO {
00323     BRACKETINDEX *indexbuffer;
00324     WORD *bracketbuffer;
00325     LONG bracketbuffersize;
00326     LONG indexbuffersize;
00327     LONG bracketfill;
00328     LONG indexfill;
00329     WORD SortType;

```



```

00330 } BRACKETINFO;
00331
00342 typedef struct TaBlEs {
00343     WORD    *tablepointers;
00344     #ifdef WITHPTHREADS
00345     WORD    **prototype;
00346     WORD    **pattern;
00347     #else
00348     WORD    *prototype;
00349     WORD    *pattern;
00350     #endif
00351     MINMAX  *mm;
00352     WORD    *flags;
00353     COMPTREE *boomlijst;
00354     UBYTE   *argtail;
00355     struct TaBlEs *spare;
00356     WORD    *buffers;
00357     LONG    totind;
00358     LONG    reserved;
00359     LONG    defined;
00360     LONG    mdefined;
00361     int     prototypeSize;
00362     int     numind;
00363     int     bounds;
00364     int     strict;
00365     int     sparse;
00366     int     numtree;
00367     int     rootnum;
00368     int     MaxTreeSize;
00369     WORD    bufnum;
00370     WORD    bufferssize;
00371     WORD    buffersfill;
00372     WORD    tablenum;
00373     WORD    mode;
00374     WORD    numdummies;
00375 } *TABLES;
00376
00377
00382 typedef struct ExprEssiOn {
00383     POSITION  onfile;
00384     POSITION  prototype;
00385     POSITION  size;
00386     RENUMBER renum; /* For Renumbering of global stored expressions */
00387     BRACKETINFO *bracketinfo;
00388     BRACKETINFO *newbracketinfo;
00389     WORD    *renumlists;
00390     WORD    *inmem; /* If in memory like e.g. a polynomial */
00391     LONG    counter;
00392     LONG    name;
00393     WORD    hidelevel;
00394     WORD    vflags; /* Various flags */
00395     WORD    printflag;
00396     WORD    status;
00397     WORD    replace;
00398     WORD    node;
00399     WORD    whichbuffer;
00400     WORD    namesize;
00401     WORD    compression;
00402     WORD    numdummies;
00403     WORD    numfactors;
00404     WORD    sizeprototype;
00405     WORD    uflags; /* User flags */
00406     #ifdef PARALLELCODE
00407     WORD    partodo; /* Whether to be done in parallel mode */
00408     #endif
00409 } *EXPRESSIONS;
00410
00411
00416 typedef struct SyMbOl {
00417     LONG    name; /* Don't change unless altering .sav too */
00418     WORD    minpower; /* Location in names buffer */
00419     WORD    maxpower; /* Minimum power admissible */
00420     WORD    complex; /* Maximum power admissible */
00421     WORD    number; /* Properties wrt complex conjugation */
00422     WORD    flags; /* Number when stored in file */
00423     WORD    node; /* Used to indicate usage when storing */
00424     WORD    namesize;
00425     WORD    dimension; /* For dimensionality checks */
00426     #if BITSINWORD == 32
00427     UBYTE d_u_m_m_y[8]; /* Padding for sav compatibility */
00428     #elif BITSINWORD == 16
00429     UBYTE d_u_m_m_y[4]; /* Padding for sav compatibility */
00430     #endif
00431 } *SYMBOLS;
00432
00432 #if BITSINWORD == 32
00433 STATIC_ASSERT(sizeof(struct SyMbOl) == 48);
00434 #elif BITSINWORD == 16
00435 STATIC_ASSERT(sizeof(struct SyMbOl) == 24);
00436 #endif

```

```

00437
00442 typedef struct InDeX { /* Don't change unless altering .sav too */
00443     LONG    name; /* Location in names buffer */
00444     WORD    type; /* Regular or dummy */
00445     WORD    dimension; /* Value of d_(n,n) or -number of symbol */
00446     WORD    number; /* Number when stored in file */
00447     WORD    flags; /* Used to indicate usage when storing */
00448     WORD    nmin4; /* Used for n-4 if dimension < 0 */
00449     WORD    node;
00450     WORD    namesize;
00451 } *INDICES;
00452 #if BITSINWORD == 32
00453 STATIC_ASSERT(sizeof(struct InDeX) == 40);
00454 #elif BITSINWORD == 16
00455 STATIC_ASSERT(sizeof(struct InDeX) == 20);
00456 #endif
00457
00462 typedef struct VeCtOr { /* Don't change unless altering .sav too */
00463     LONG    name; /* Location in names buffer */
00464     WORD    complex; /* Properties under complex conjugation */
00465     WORD    number; /* Number when stored in file */
00466     WORD    flags; /* Used to indicate usage when storing */
00467     WORD    node;
00468     WORD    namesize;
00469     WORD    dimension; /* For dimensionality checks */
00470 #if BITSINWORD == 32
00471     UBYTE d_u_m_m_y[8]; /* Padding for sav compatibility */
00472 #elif BITSINWORD == 16
00473     UBYTE d_u_m_m_y[4]; /* Padding for sav compatibility */
00474 #endif
00475 } *VECTORS;
00476 #if BITSINWORD == 32
00477 STATIC_ASSERT(sizeof(struct VeCtOr) == 40);
00478 #elif BITSINWORD == 16
00479 STATIC_ASSERT(sizeof(struct VeCtOr) == 20);
00480 #endif
00481
00487 typedef struct FuNcTiOn { /* Don't change unless altering .sav too */
00488     TABLES tabl;
00489     LONG    symminfo;
00490     LONG    name;
00491     WORD    commute;
00492     WORD    complex;
00493     WORD    number;
00494     WORD    flags;
00495     WORD    spec;
00496     WORD    symmetric;
00497     WORD    node;
00498     WORD    namesize;
00499     WORD    dimension; /* For dimensionality checks */
00500     WORD    maxnumargs;
00501     WORD    minnumargs;
00502 } *FUNCTIONS;
00503 #if BITSINWORD == 32
00504 STATIC_ASSERT(sizeof(struct FuNcTiOn) == 72);
00505 #elif BITSINWORD == 16
00506 STATIC_ASSERT(sizeof(struct FuNcTiOn) == 36);
00507 #endif
00508
00513 typedef struct SeTs {
00514     LONG    name; /* Location in names buffer */
00515     WORD    type; /* Symbol, vector, index or function */
00516     WORD    first; /* First element in setstore */
00517     WORD    last; /* Last element in setstore (excluding) */
00518     WORD    node;
00519     WORD    namesize;
00520     WORD    dimension; /* For dimensionality checks */
00521     WORD    flags; /* Like: ordered */
00522 } *SETS;
00523
00528 typedef struct DuBiOuS { /* Undeclared objects. Just for compiler. */
00529     LONG    name; /* Location in names buffer */
00530     WORD    node;
00531     WORD    dummy;
00532 } *DUBIOUSV;
00533
00534 typedef struct FaCdOLLaR {
00535     WORD    *where; /* A pointer(!) to the content */
00536     LONG    size;
00537     WORD    type; /* Type can be DOLNUMBER or DOLTERMS */
00538     WORD    value; /* in case it is a (short) number */
00539 } FACDOLLAR;
00540
00541 typedef struct DoLLaRs {
00542     WORD    *where; /* A pointer(!) to the object */
00543     FACDOLLAR *factors; /* an array of factors. nfactors elements */
00544 #ifdef WITHPTHREADS

```

```

00545     pthread_mutex_t pthreadslockread;
00546     pthread_mutex_t pthreadslockwrite;
00547 #endif
00548     LONG     size;                /* The number of words */
00549     LONG     name;
00550     WORD     type;
00551     WORD     node;
00552     WORD     index;
00553     WORD     zero;
00554     WORD     numdummies;
00555     WORD     nfactors;
00556 } *DOLLARS;
00557
00562 typedef struct MoDoPtDoLlArS {
00563 #ifdef WITHPTHREADS
00564     DOLLARS     dstruct;        /* If local dollar: list of DOLLARS for each thread */
00565 #endif
00566     WORD     number;
00567     WORD     type;
00568 } MODOPTDOLLAR;
00569
00574 typedef struct fixedset {
00575     char *name;
00576     char *description;
00577     int type;
00578     int dimension;
00579 } FIXEDSET;
00580
00585 typedef struct TaBlEbAsEsUbInDeX {
00586     POSITION where;
00587     LONG size;
00588 } TABLEBASESUBINDEX;
00589
00594 typedef struct TaBlEbAsE {
00595     POSITION fillpoint;
00596     POSITION current;
00597     UBYTE *name;
00598     int *tablenumbers;          /* Number of each table */
00599     TABLEBASESUBINDEX *subindex; /* For each table */
00600     int numtables;
00601 } TABLEBASE;
00602
00609 typedef struct {
00610     WORD *location;
00611     int numargs;
00612     int numfunnies;
00613     int numwildcards;
00614     int symmet;
00615     int tensor;
00616     int commute;
00617 } FUN_INFO;
00618
00619 typedef struct PaRtIcLe {
00620     WORD number; /* Number of the function */
00621     WORD spin;   /* +/- dimension of SU(2) representation */
00622     WORD mass;   /* Number of symbol or 0 */
00623     WORD type;   /* -1: anti particle, 1: particle, 0: own antiparticle */
00624 } PARTICLE;
00625
00626 typedef struct VeRtEx {
00627     PARTICLE particles[MAXPARTICLES];
00628     WORD couplings[2*MAXCOUPLINGS];
00629     WORD nparticles;
00630     WORD ncouplings;
00631     WORD type;
00632     WORD error;
00633     WORD externonly;
00634     WORD spare;
00635 } VERTEX;
00636
00637 typedef struct MoDeL {
00638     VERTEX **vertices;
00639     WORD *couplings;
00640     UBYTE *name;
00641     void *grccmodel;
00642     WORD legcouple[MAXLEGS+2];
00643     WORD nparticles;
00644     WORD nvertices;
00645     WORD invertices;
00646     WORD sizevertices;
00647     WORD sizecouplings;
00648     WORD ncouplings;
00649     WORD error;
00650     WORD dummy;
00651 } MODEL;
00652
00653 /*

```

```

00654 * The struct NAMESPACE is used for the namespace info. It is a
00655 * doubly linked list of nested namespaces.
00656 */
00657
00658 typedef struct NaMeSpAcE {
00659     struct NaMeSpAcE *previous;
00660     struct NaMeSpAcE *next;
00661     NAMETREE *usenames;
00662     UBYTE *name;
00663 } NAMESPACE;
00664
00665
00666 /*
00667  #] Variables :
00668  #[ Files :
00669  */
00670
00682 typedef struct FiLe {
00683     POSITION PPosition;          /* File position */
00684     POSITION filesize;          /* Because SEEK_END is unsafe on IBM */
00685     WORD *PObuffer;            /* Address of the intermediate buffer */
00686     WORD *POstop;              /* End of the buffer */
00687     WORD *POfill;              /* Fill position of the buffer */
00688     WORD *POfull;              /* Full buffer when only cached */
00689 #ifdef WITHPTHREADS
00690     WORD *wPObuffer;           /* Address of the intermediate worker buffer */
00691     WORD *wPOstop;             /* End of the worker buffer */
00692     WORD *wPOfill;             /* Fill position of the worker buffer */
00693     WORD *wPOfull;             /* Full buffer when only worker cached */
00694 #endif
00695     char *name;                /* name of the file */
00696 #ifdef WITHZLIB
00697     z_stream *zsp;             /* The pointer to the stream struct for gzip */
00698     Bytef *ziobuffer;          /* The output buffer for compression */
00699 #endif
00700     ULONG numblocks;           /* Number of blocks in file */
00701     ULONG inbuffer;            /* Block in the buffer */
00702     LONG PSize;                /* size of the buffer */
00703 #ifdef WITHZLIB
00704     LONG ziosize;              /* size of the zoutbuffer */
00705 #endif
00706 #ifdef WITHPTHREADS
00707     LONG wPSize;               /* size of the worker buffer */
00708     pthread_mutex_t pthreadslock;
00709 #endif
00710     int handle;
00711     int active;                /* File is open or closed. Not used. */
00712 } FILEHANDLE;
00713
00723 typedef struct Stream {
00724     off_t fileposition;
00725     off_t linenumber;
00726     off_t prevline;
00727     UBYTE *buffer;
00728     UBYTE *pointer;
00729     UBYTE *top;
00730     UBYTE *FoldName;
00731     UBYTE *name;
00732     UBYTE *pname;
00733     LONG buffersize;
00734     LONG bufferposition;
00735     LONG inbuffer;
00736     int previous;
00737     int handle;
00738     int type;
00739     int prevs;
00740     int previousNoShowInput;
00741     int eqnum;
00742     int afterwards;
00743     int olddelay;
00744     int oldnoshowinput;
00745     UBYTE isnextchar;
00746     UBYTE nextchar[2];
00747     UBYTE reserved;
00748 } STREAM;
00749
00751 typedef struct SpecTator {
00752     POSITION position;          /* The place where we will be writing */
00753     POSITION readpos;           /* The place from which we read */
00754     FILEHANDLE *fh;
00755     char *name;                /* We identify the spectator by the name of the expression */
00756     WORD exprnumber;           /* During running we use the number. */
00757     WORD flags;                /* local, global? */
00758 } SPECTATOR;
00759
00760 /*
00761  #] Files :

```

```

00762     # [ Traces :
00763     */
00764
00774 typedef struct TrAcEs {           /* For computing 4 dimensional traces */
00775     WORD      *accu;               /* NUMBER * 2 */
00776     WORD      *accup;
00777     WORD      *termp;
00778     WORD      *perm;              /* number */
00779     WORD      *inlist;            /* number */
00780     WORD      *nt3;               /* number/2 */
00781     WORD      *nt4;               /* number/2 */
00782     WORD      *j3;               /* number*2 */
00783     WORD      *j4;               /* number*2 */
00784     WORD      *e3;               /* number*2 */
00785     WORD      *e4;               /* number */
00786     WORD      *eers;             /* number/2 */
00787     WORD      *mepf;             /* number/2 */
00788     WORD      *mdel;             /* number/2 */
00789     WORD      *pepf;             /* number*2 */
00790     WORD      *pdel;             /* number*3/2 */
00791     WORD      sgn;
00792     WORD      stap;
00793     WORD      stepl,kstep,mdum;
00794     WORD      gamm,ad,a3,a4,lc3,lc4;
00795     WORD      sign1,sign2,gamma5,num,level,factor,allsign;
00796     WORD      finalstep;
00797 } TRACES;
00798
00806 typedef struct TrAcEn {           /* For computing n dimensional traces */
00807     WORD      *accu;               /* NUMBER */
00808     WORD      *accup;
00809     WORD      *termp;
00810     WORD      *perm;              /* number */
00811     WORD      *inlist;            /* number */
00812     WORD      sgn,num,level,factor,allsign;
00813 } *TRACEN;
00814
00815 /*
00816     # ] Traces :
00817     # [ Preprocessor :
00818     */
00819
00824 typedef struct pReVaR {
00825     UBYTE *name;
00826     UBYTE *value;
00827     UBYTE *argnames;
00828     int nargs;
00829     int wildarg;
00830 } PREVAR;
00831
00836 typedef struct {
00837     WORD *buffer;
00838     int oldcomPILEtype;
00839     int oldparallelflag;
00840     int oldnumpotmoddollars;
00841     WORD size;
00842     WORD numdollars;
00843     WORD oldcbuf;
00844     WORD oldrbuf;
00845     WORD inscbuf;
00846     WORD oldcnumlhs;
00847 } INSIDEINFO;
00848
00854 typedef struct {
00855     UBYTE *buffer;
00856     LONG size;
00857 } PRELOAD;
00858
00863 typedef struct {
00864     PRELOAD p;
00865     UBYTE *name;
00866     int loadmode;
00867     int mustfree;
00868 } PROCEDURE;
00869
00877 typedef struct DoLoOp {
00878     PRELOAD p;
00879     UBYTE *name;
00880     UBYTE *vars;                 /* for {} or name of expression */
00881     UBYTE *contents;
00882     UBYTE *dollarname;
00883     LONG startlinenumber;
00884     LONG firstnum;
00885     LONG lastnum;
00886     LONG incnum;
00887     int type;
00888     int NoShowInput;

```

```

00889     int errorsinloop;
00890     int firstloopcall;
00891     WORD firstdollar;    /* When >= 0 we have to get the value from a dollar */
00892     WORD lastdollar;     /* When >= 0 we have to get the value from a dollar */
00893     WORD incdollar;      /* When >= 0 we have to get the value from a dollar */
00894     WORD NumPreTypes;
00895     WORD PreIfLevel;
00896     WORD PreSwitchLevel;
00897 } DOLOOP;
00898
00906 struct bit_field {      /* Assume 8 bits per byte */
00907     UBYTE bit_0          : 1;
00908     UBYTE bit_1          : 1;
00909     UBYTE bit_2          : 1;
00910     UBYTE bit_3          : 1;
00911     UBYTE bit_4          : 1;
00912     UBYTE bit_5          : 1;
00913     UBYTE bit_6          : 1;
00914     UBYTE bit_7          : 1;
00915 /*
00916     UINT bit_0           : 1;
00917     UINT bit_1           : 1;
00918     UINT bit_2           : 1;
00919     UINT bit_3           : 1;
00920     UINT bit_4           : 1;
00921     UINT bit_5           : 1;
00922     UINT bit_6           : 1;
00923     UINT bit_7           : 1;
00924 */
00925 };
00926
00931 typedef struct bit_field set_of_char[32];
00932
00937 typedef struct bit_field *one_byte;
00938
00943 typedef struct {
00944     WORD newlogonly;
00945     WORD newhandle;
00946     WORD oldhandle;
00947     WORD oldlogonly;
00948     WORD oldprintttype;
00949     WORD oldsilent;
00950 } HANDLERS;
00951
00952 /*
00953     #] Preprocessor :
00954     #[ Varia :
00955 */
00956
00957 typedef int (*FINISHUFFLE)(WORD *);
00958 typedef int (*DO_UFFLE)(WORD *,WORD,WORD,WORD);
00959
00960 #ifdef WITHPTHREADS
00961 typedef WORD (*COMPAREDUMMY)(void *,WORD *,WORD *,WORD);
00962 #else
00963 typedef WORD (*COMPAREDUMMY)(WORD *,WORD *,WORD);
00964 #endif
00965
00971 typedef struct CbUf {
00972     WORD *Buffer;
00973     WORD *Top;
00974     WORD *Pointer;
00975     WORD **lhs;
00976     WORD **rhs;
00977     LONG *CanCommu;
00978     LONG *NumTerms;
00979     WORD *numdum;
00980     WORD *dimension;
00981     COMPTREE *boomlijst;
00982     LONG BufferSize;
00983     int numlhs;
00984     int numrhs;
00985     int maxlhs;
00986     int maxrhs;
00987     int mnumlhs;
00988     int mnumrhs;
00989     int numtree;
00990     int rootnum;
00991     int MaxTreeSize;
00992 } CBUF;
00993
01001 typedef struct ChAnNeL {
01002     char *name;
01003     int handle;
01004 } CHANNEL;
01005
01015 typedef struct {

```

```

01016     UBYTE *parameter;
01017     int type;
01018     int flags;
01019     // This ordering is assumed by initializer lists in many places. In this
01020     // case the struct should anyway not have additional padding between the
01021     // two int and the LONG members.
01022     LONG value;
01023 } SETUPPARAMETERS;
01024
01033 typedef struct NeStInG {
01034     WORD *termsize;
01035     WORD *funsize;
01036     WORD *argsize;
01037 } *NESTING;
01038
01045 typedef struct StOrEcAcHe {
01046     POSITION position;
01047     POSITION toppos;
01048     struct StOrEcAcHe *next;
01049     WORD buffer[2];
01050 } *STORECACHE;
01051
01057 typedef struct PeRmUtE {
01058     WORD *objects;
01059     WORD sign;
01060     WORD n;
01061     WORD cycle[MAXMATCH];
01062 } PERM;
01063
01068 typedef struct PeRmUtEp {
01069     WORD **objects;
01070     WORD sign;
01071     WORD n;
01072     WORD cycle[MAXMATCH];
01073 } PERMP;
01074
01080 typedef struct DiStRiBuTe {
01081     WORD *obj1;
01082     WORD *obj2;
01083     WORD *out;
01084     WORD sign;
01085     WORD n1;
01086     WORD n2;
01087     WORD n;
01088     WORD cycle[MAXMATCH];
01089 } DISTRIBUTE;
01090
01096 typedef struct PaRtI {
01097     WORD *psize; /* the sizes of the partitions */
01098     WORD *args; /* the offsets of the arguments to be partitioned */
01099     WORD *nargs; /* argument numbers (different number = different argument) */
01100     WORD *nfun; /* the functions into which the partitions go */
01101     WORD numargs; /* the number of arguments to be partitioned */
01102     WORD numpart; /* the number of partitions */
01103     WORD where; /* offset of the function in the term */
01104 } PARTI;
01105
01115 typedef struct sOrT {
01116     FILEHANDLE file; /* The own sort file */
01117     POSITION SizeInFile[3]; /* Sizes in the various files */
01118     WORD *lBuffer; /* The large buffer */
01119     WORD *lTop; /* End of the large buffer */
01120     WORD *lFill; /* The filling point of the large buffer */
01121     WORD *used; /* auxiliary during actual sort */
01122     WORD *sBuffer; /* The small buffer */
01123     WORD *sTop; /* End of the small buffer */
01124     WORD *sTop2; /* End of the extension of the small buffer */
01125     WORD *sHalf; /* Halfway point in the extension */
01126     WORD *sFill; /* Filling point in the small buffer */
01127     WORD **sPointer; /* Pointers to terms in the small buffer */
01128     WORD **sPoinFill; /* Filling point for pointers to the sm.buf */
01129     WORD *cBuffer; /* Compress buffer (if it exists) */
01130     WORD **Patches; /* Positions of patches in large buffer */
01131     WORD **pStop; /* Ends of patches in the large buffer */
01132     WORD **poina; /* auxiliary during actual sort */
01133     WORD **poin2a; /* auxiliary during actual sort */
01134     WORD *ktoi; /* auxiliary during actual sort */
01135     WORD *tree; /* auxiliary during actual sort */
01136 #ifdef WITHZLIB
01137     WORD *fpccompressed; /* is output filepatch compressed? */
01138     WORD *fpincompressed; /* is input filepatch compressed? */
01139     z_stream *zsparray; /* the array of zstreams for decompression */
01140 #endif
01141     POSITION *fPatches; /* Positions of output file patches */
01142     POSITION *inPatches; /* Positions of input file patches */
01143     POSITION *fPatchesStop; /* Positions of output file patches */
01144     POSITION *iPatches; /* Input file patches, Points to fPatches or inPatches */

```

```

01145     FILEHANDLE *f;                /* The actual output file */
01146     FILEHANDLE **ff;              /* Handles for a staged sort */
01147     LONG sTerms;                  /* Terms in small buffer */
01148     LONG LargeSize;               /* Size of large buffer (in words) */
01149     LONG SmallSize;               /* Size of small buffer (in words) */
01150     LONG SmallEsize;              /* Size of small + extension (in words) */
01151     LONG TermsInSmall;            /* Maximum number of terms in small buffer */
01152     LONG Terms2InSmall;           /* with extension for polyfuns etc. */
01153     LONG GenTerms;                /* Number of generated terms */
01154     LONG TermsLeft;               /* Number of terms still in existence */
01155     LONG GenSpace;                /* Amount of space of generated terms */
01156     LONG SpaceLeft;               /* Space needed for still existing terms */
01157     LONG putinsize;                /* Size of buffer in Putin */
01158     LONG ninterms;                /* Which input term ? */
01159     int MaxPatches;               /* Maximum number of patches in large buffer */
01160     int MaxFpatches;              /* Maximum number of patches in one filesort */
01161     int type;                     /* Main, function or sub(routine) */
01162     int lPatch;                   /* Number of patches in the large buffer */
01163     int fPatchNl;                 /* Number of patches in input file */
01164     int PolyWise;                 /* Is there a polyfun and if so, where? */
01165     int PolyFlag;                 /* */
01166     int cBufferSize;              /* Size of the compress buffer */
01167     int maxtermSize;              /* Keeps track for buffer allocations */
01168     int newmaxtermSize;           /* Auxiliary for maxtermSize */
01169     int outputmode;               /* Tells where the output is going */
01170     int stagelevel;               /* In case we have a 'staged' sort */
01171     WORD fPatchN;                 /* Number of patches on file (output) */
01172     WORD inNum;                   /* Number of patches on file (input) */
01173     WORD stage4;                  /* Are we using stage4? */
01174 } SORTING;
01175
01176 #ifdef WITHPTHREADS
01177
01183 typedef struct SoRtBlOcK {
01184     pthread_mutex_t *MasterBlockLock;
01185     WORD **MasterStart;
01186     WORD **MasterFill;
01187     WORD **MasterStop;
01188     int MasterNumBlocks;
01189     int MasterBlock;
01190     int FillBlock;
01191 } SORTBLOCK;
01192 #endif
01193
01194 #ifdef DEBUGGER
01195 typedef struct DeBuGgInG {
01196     int eflag;
01197     int printfFlag;
01198     int logfileFlag;
01199     int stdoutFlag;
01200 } DEBUGSTR;
01201 #endif
01202
01203 #ifdef WITHPTHREADS
01204
01210 typedef struct ThReAdBuCkEt {
01211     POSITION *deferbuffer;          /* For Keep Brackets: remember position */
01212     WORD *threadbuffer;            /* Here are the (primary) terms */
01213     WORD *compressbuffer;          /* For keep brackets we need the compressbuffer */
01214     LONG threadbufferSize;         /* Number of words in threadbuffer */
01215     LONG ddterms;                  /* Number of primary+secondary terms represented */
01216     LONG firstterm;                /* The number of the first term in the bucket */
01217     LONG firstbracket;              /* When doing complete brackets */
01218     LONG lastbracket;              /* When doing complete brackets */
01219     pthread_mutex_t lock;          /* For the load balancing phase */
01220     int free;                       /* Status of the bucket */
01221     int totnum;                     /* Total number of primary terms */
01222     int usenum;                     /* Which is the term being used at the moment */
01223     int busy;                       /* */
01224     int type;                       /* Doing brackets? */
01225 } THREADBUCKET;
01226
01227 #endif
01228
01236 typedef struct {
01237     WORD *coefs;                   /* The array of coefficients */
01238     WORD numsym;                   /* The number of the symbol in the polynomial */
01239     WORD arraysize;                /* The size of the allocation of coefs */
01240     WORD polysize;                 /* The maximum power in the polynomial */
01241     WORD modnum;                   /* The prime number of the modulus */
01242 } POLYMOD;
01243
01244 typedef struct {
01245     WORD *outterm;                  /* Used in DoShuffle/Merge/FinishShuffle system */
01246     WORD *outfun;
01247     WORD *incoef;
01248     WORD *stopl;

```



```

01249     WORD    *stop2;
01250     WORD    *ststop1;
01251     WORD    *ststop2;
01252     FINISHUFFLE finishuf;
01253     DO_UFFLE    do_uffle;
01254     LONG    combilast;
01255     WORD    nincoef;
01256     WORD    level;
01257     WORD    thefunction;
01258     WORD    option;
01259 } SHvariables;
01260
01261 typedef struct {                /* Used for computing calculational cost in optim.c */
01262     LONG    add;
01263     LONG    mul;
01264     LONG    div;
01265     LONG    pow;
01266 } COST;
01267
01268 typedef struct {
01269     UWORD    *a;        /* The number array */
01270     UWORD    *m;        /* The modulus array */
01271     WORD    na;        /* Size of the number */
01272     WORD    nm;        /* size of the number in the modulus array */
01273 } MODNUM;
01274
01275 /*
01276     Struct for optimizing outputs. If changed, do not forget to change
01277     the padding information in the AO struct.
01278 */
01279 typedef struct {
01280     union { /* we do this to allow padding */
01281         float fval;
01282         int ival[2]; /* This should be enough */
01283     } mctsconstant;
01284     int    horner;
01285     int    hornerdirection;
01286     int    method;
01287     int    mctstimelimit;
01288     int    mctsnumpexpand;
01289     int    mctsnumpkeep;
01290     int    mctsnumprepeat;
01291     int    greedytimelimit;
01292     int    greedyminnum;
01293     int    greedymaxperc;
01294     int    printstats;
01295     int    debugflags;
01296     int    schemeflags;
01297     int    mctsdecaymode;
01298     int    saIter; /* Simulated annealing updates */
01299     union {
01300         float fval;
01301         int ival[2];
01302     } saMaxT; /* Maximum temperature of SA */
01303     union {
01304         float fval;
01305         int ival[2];
01306     } saMinT; /* Minimum temperature of SA */
01307     int    spare;
01308 } OPTIMIZE;
01309
01310 typedef struct {
01311     WORD    *code;
01312     UBYTE    *nameofexpr; /* It is easier to remember an expression by name */
01313     LONG    codesize; /* We need this for the checkpoints */
01314     WORD    exprnr; /* Problem here is: we renumber them in execute.c */
01315     WORD    minvar;
01316     WORD    maxvar;
01317 } OPTIMIZERESULT;
01318
01319 typedef struct {
01320     WORD    *lhs; /* Object to be replaced */
01321     WORD    *rhs; /* Depending on the type it will be UBYTE* or WORD* */
01322     int    type;
01323     int    size; /* Size of the lhs */
01324 } DICTIONARY_ELEMENT;
01325
01326 typedef struct {
01327     DICTIONARY_ELEMENT **elements;
01328     UBYTE    *name;
01329     int    sizeelements;
01330     int    numelements;
01331     int    numbers; /* deal with numbers */
01332     int    variables; /* deal with single variables */
01333     int    characters; /* deal with special characters */
01334     int    funwith; /* deal with functions with arguments */
01335     int    gnumelements; /* if .global shrinks the dictionary */

```

```

01336     int ranges;
01337 } DICTIONARY;
01338
01339 typedef struct {
01340     WORD ncase;
01341     WORD value;
01342     WORD compbuffer;
01343 } SWITCHTABLE;
01344
01345 typedef struct {
01346     SWITCHTABLE *table;
01347     SWITCHTABLE defaultcase;
01348     SWITCHTABLE endswitch;
01349     WORD typetable;
01350     WORD maxcase;
01351     WORD mincase;
01352     WORD numcases;
01353     WORD tablesize;
01354     WORD caseoffset;
01355     WORD iflevel;
01356     WORD whilelevel;
01357     WORD nestingsum;
01358     WORD padding;
01359 } SWITCH;
01360
01361 typedef struct {
01362     WORD *term;
01363     void *currentModel;
01364     void *currentMODEL;
01365     WORD *legcouple[MAXLEGS+1];
01366     LONG numtopo;
01367     LONG numdia;
01368     WORD diaoffset;
01369     WORD level;
01370     WORD externalset;
01371     WORD internalset;
01372     WORD numextern;
01373     WORD flags;
01374 } TERMINFO;
01375
01376 /*
01377 #] Varia :
01378 #[ A :
01379     #[ M : The M struct is for global settings at startup or .clear
01380 */
01381
01382 struct M_const {
01383     POSITION zeropos;           /* (M) is zero */
01384     SORTING *S0;
01385     UWORD *gcmmod;
01386     UWORD *gpowmod;
01387     UBYTE *TempDir;           /* (M) Path with where the temporary files go */
01388     UBYTE *TempSortDir;       /* (M) Path with where the sort files go */
01389     UBYTE *IncDir;            /* (M) Directory path for include files */
01390     UBYTE *InputFileName;     /* (M) */
01391     UBYTE *LogFileName;       /* (M) */
01392     UBYTE *OutBuffer;         /* (M) Output buffer in pre.c */
01393     UBYTE *Path;              /* (M) */
01394     UBYTE *SetupDir;          /* (M) Directory with setup file */
01395     UBYTE *SetupFile;         /* (M) Name of setup file */
01396     UBYTE *gFortran90Kind;
01397     UBYTE *gextrasymp;
01398     UBYTE *ggextrasymp;
01399     UBYTE *oldnumextrasymp;
01400     SPECTATOR *SpectatorFiles;
01401 #ifdef WITHPTHREADS
01402     pthread_rwlock_t handlelock; /* (M) */
01403     pthread_mutex_t storefilelock; /* (M) */
01404     pthread_mutex_t sbuflock;     /* (M) Lock for writing in the AM.sbuffer */
01405     LONG ThreadScratSize;         /* (M) Size of Fscr[0/2] buffers of the workers */
01406     LONG ThreadScratOutSize;      /* (M) Size of Fscr[1] buffers of the workers */
01407 #endif
01408     LONG MaxTer;                 /* (M) Maximum term size. Fixed at setup. In Bytes!!! */
01409     LONG CompressSize;           /* (M) Size of Compress buffer */
01410     LONG ScratSize;              /* (M) Size of Fscr[] buffers */
01411     LONG HideSize;               /* (M) Size of Fscr[2] buffer */
01412     LONG SizeStoreCache;         /* (M) Size of the caches for reading global expr. */
01413     LONG MaxStreamSize;          /* (M) Maximum buffer size in reading streams */
01414     LONG SIOsize;                /* (M) Sort InputOutput buffer size */
01415     LONG SLargeSize;             /* (M) */
01416     LONG SSmallEsize;           /* (M) */
01417     LONG SSmallSize;            /* (M) */
01418     LONG STermsInSmall;         /* (M) */
01419     LONG MaxBracketBufferSize;   /* (M) Max Size for B+ or AB+ per expression */
01420     LONG hProcessBucketSize;     /* (M) */
01421     LONG gProcessBucketSize;     /* (M) */
01422     LONG shmWinSize;            /* (M) size for shared memory window used in communications */

```

```

01430     LONG     OldChildTime;          /* (M) Zero time. Needed in timer. */
01431     LONG     OldSecTime;            /* (M) Zero time for measuring wall clock time */
01432     LONG     OldMilliTime;          /* (M) Same, but milli seconds */
01433     LONG     WorkSize;              /* (M) Size of WorkSpace */
01434     LONG     gThreadBucketSize;     /* (C) */
01435     LONG     ggThreadBucketSize;    /* (C) */
01436     LONG     SumTime;               /* Used in .clear */
01437     LONG     SpectatorSize;         /* Size of the buffer in bytes */
01438     LONG     TimeLimit;             /* Limit in sec to the total real time */
01439 #ifdef WITHFLOAT
01440     LONG     gDefaultPrecision;     /* (M) Default precision in bits for float_ */
01441     LONG     gMaxWeight;            /* (M) Maximum weight for MZV or Euler */
01442     LONG     ggDefaultPrecision;    /* (M) Default precision in bits for float_ */
01443     LONG     ggMaxWeight;           /* (M) Maximum weight for MZV or Euler */
01444 #endif
01445     int      FileOnlyFlag;          /* (M) Writing only to file */
01446     int      Interact;              /* (M) Interactive mode flag */
01447     int      MaxParLevel;           /* (M) Maximum nesting of parentheses */
01448     int      OutBufSize;            /* (M) size of OutBuffer */
01449     int      SMaxFpatches;          /* (M) */
01450     int      SMaxPatches;           /* (M) */
01451     int      StdOut;                /* (M) Regular output channel */
01452     int      ginsidefirst;          /* (M) Not used yet */
01453     int      gDefDim;              /* (M) */
01454     int      gDefDim4;             /* (M) */
01455     int      NumFixedSets;          /* (M) Number of the predefined sets */
01456     int      NumFixedFunctions;     /* (M) Number of built in functions */
01457     int      rbufnum;               /* (M) startup compiler buffer */
01458     int      dbufnum;               /* (M) dollar variables */
01459     int      sbufnum;               /* (M) subterm variables */
01460     int      zbufnum;               /* (M) special values */
01461     int      SkipClears;            /* (M) Number of .clear to skip at start */
01462     int      gTokensWriteFlag;      /* (M) */
01463     int      gfunpowers;            /* (M) */
01464     int      gStatsFlag;            /* (M) */
01465     int      gNamesFlag;           /* (M) */
01466     int      gCodesFlag;           /* (M) */
01467     int      gSortType;             /* (M) */
01468     int      gproperorderflag;      /* (M) */
01469     int      hparallelflag;         /* (M) */
01470     int      gparallelflag;         /* (M) */
01471     int      totalnumberofthreads; /* (M) */
01472     int      gSizeCommuteInSet;     /* (M) */
01473     int      gThreadStats;          /* (M) */
01474     int      ggThreadStats;         /* (M) */
01475     int      gFinalStats;           /* (M) */
01476     int      ggFinalStats;          /* (M) */
01477     int      gThreadsFlag;          /* (M) */
01478     int      ggThreadsFlag;         /* (M) */
01479     int      gThreadBalancing;      /* (M) */
01480     int      ggThreadBalancing;     /* (M) */
01481     int      gThreadSortFileSynch; /* (M) */
01482     int      ggThreadSortFileSynch; /* (M) */
01483     int      gProcessStats;         /* (M) */
01484     int      ggProcessStats;        /* (M) */
01485     int      gOldParallelStats;     /* (M) */
01486     int      ggOldParallelStats;    /* (M) */
01487     int      maxFlevels;             /* (M) maximum function levels */
01488     int      resetTimeOnClear;      /* (M) */
01489     int      gcNumDollars;          /* (M) number of dollars for .clear */
01490     int      MultiRun;              /* (M) */
01491     int      gNoSpacesInNumbers;    /* For very long numbers */
01492     int      ggNoSpacesInNumbers;   /* For very long numbers */
01493     int      gIsFortran90;          /* (M) */
01494     int      PrintTotalSize;        /* (M) */
01495     int      fbuffersize;           /* Size for the AT.fbufnum factorization caches */
01496     int      gOldFactArgFlag;       /* (M) */
01497     int      ggOldFactArgFlag;      /* (M) */
01498     int      gnumextrasym;          /* (M) */
01499     int      ggnumextrasym;         /* (M) */
01500     int      NumSpectatorFiles;      /* Elements used in AM.spectatorfiles; */
01501     int      SizeForSpectatorFiles; /* Size in AM.spectatorfiles; */
01502     int      gOldGCDflag;           /* (M) */
01503     int      ggOldGCDflag;          /* (M) */
01504     int      gWTimeStatsFlag;       /* (M) */
01505     int      ggWTimeStatsFlag;      /* (M) */
01506     int      jumpratio;             /* (M) */
01507     WORD     MaxTal;                /* (M) Maximum number of words in a number */
01508     WORD     IndDum;                /* (M) Basis value for dummy indices */
01509     WORD     DumInd;                /* (M) */
01510     WORD     WilInd;                /* (M) Offset for wildcard indices */
01511     WORD     gncmod;                /* (M) Global setting of modulus. size of gcmmod */
01512     WORD     gnpowmod;              /* (M) Global printing as powers. size gpowmod */
01513     WORD     gmodmode;              /* (M) Global mode for modulus */
01514     WORD     gUnitTrace;            /* (M) Global value of Tr[1] */
01515     WORD     gOutputMode;           /* (M) */
01516     WORD     gOutputSpaces;         /* (M) */

```

```

01517 WORD gOutNumberType; /* (M) */
01518 WORD gCnumpows; /* (M) */
01519 WORD gUniTrace[4]; /* (M) */
01520 WORD MaxWildcards; /* (M) Maximum number of wildcards */
01521 WORD mTraceDum; /* (M) Position/Offset for generated dummies */
01522 WORD OffsetIndex; /* (M) */
01523 WORD OffsetVector; /* (M) */
01524 WORD RepMax; /* (M) Max repeat levels */
01525 WORD LogType; /* (M) Type of writing to log file */
01526 WORD ggStatsFlag; /* (M) */
01527 WORD gLineLength; /* (M) */
01528 WORD qError; /* (M) Only error checking {-c option} */
01529 WORD FortranCont; /* (M) Fortran Continuation character */
01530 WORD HoldFlag; /* (M) Exit on termination? */
01531 WORD Ordering[15]; /* (M) Auxiliary for ordering wildcards */
01532 WORD silent; /* (M) Silent flag. Only results in output. */
01533 WORD tracebackflag; /* (M) For tracing errors */
01534 WORD expnum; /* (M) internal number of ^ function */
01535 WORD denomnum; /* (M) internal number of / function */
01536 WORD facnum; /* (M) internal number of fac_ function */
01537 WORD invfacnum; /* (M) internal number of invfac_ function */
01538 WORD sumnum; /* (M) internal number of sum_ function */
01539 WORD sumpnum; /* (M) internal number of sump_ function */
01540 WORD OldOrderFlag; /* (M) Flag for allowing old statement order */
01541 WORD termfunnum; /* (M) internal number of term_ function */
01542 WORD matchfunnum; /* (M) internal number of match_ function */
01543 WORD countfunnum; /* (M) internal number of count_ function */
01544 WORD gPolyFun; /* (M) global value of PolyFun */
01545 WORD gPolyFunInv; /* (M) global value of Inverse of PolyFun */
01546 WORD gPolyFunType; /* (M) global value of PolyFun */
01547 WORD gPolyFunExp;
01548 WORD gPolyFunVar;
01549 WORD gPolyFunPow;
01550 WORD dollarzero; /* (M) for dollars with zero value */
01551 WORD atstartup; /* To protect against DATE_ ending in \n */
01552 WORD exitflag; /* (R) For the exit statement */
01553 WORD NumStoreCaches; /* (I) Number of storage caches per processor */
01554 WORD gIndentSpace; /* For indentation in output */
01555 WORD ggIndentSpace;
01556 WORD gShortStatsMax;
01557 WORD ggShortStatsMax;
01558 WORD gextrasymbols;
01559 WORD ggextrasymbols;
01560 WORD zerorhs;
01561 WORD onerhs;
01562 WORD havesortdir;
01563 WORD vectorzero; /* p0_ */
01564 WORD ClearStore;
01565 WORD BracketFactors[8];
01566 BOOL FromStdin; /* read the input from STDIN */
01567 BOOL IgnoreDeprecation; /* ignore deprecation warning */
01568 };
01569 /*
01570 #] M :
01571 #[ P : The P struct defines objects set by the preprocessor
01572 */
01580 struct P_const {
01581 LIST DollarList; /* (R) Dollar variables. Contains pointers
01582 to contents of the variables.*/
01583 LIST PreVarList; /* (R) List of preprocessor variables
01584 Points to contents. Can be changed */
01585 LIST LoopList; /* (P) List of do loops */
01586 LIST ProcList; /* (P) List of procedures */
01587 INSIDEINFO inside; /* Information during #inside/#endside */
01588 NAMESPACE *firstnamespace; /* is zero when no namespace specified */
01589 NAMESPACE *lastnamespace; /* is zero when no namespace specified */
01590 UBYTE *fullname; /* buffer for namespace expanded names */
01591 UBYTE **PreSwitchStrings; /* (P) The string in a switch */
01592 UBYTE *preStart; /* (P) Preprocessor instruction buffer */
01593 UBYTE *preStop; /* (P) end of preStart */
01594 UBYTE *preFill; /* (P) Filling point in preStart */
01595 UBYTE *procedureExtension; /* (P) Extension for procedure files (prc) */
01596 UBYTE *cprocedureExtension; /* (P) Extension after .clear */
01597 LONG *PreAssignStack; /* For nesting $name assignments */
01598 int *PreIfStack; /* (P) Tracks nesting of #if */
01599 int *PreSwitchModes; /* (P) Stack of switch status */
01600 int *PreTypes; /* (P) stack of #call, #do etc nesting */
01601 #ifdef WITHPTHREADS
01602 pthread_mutex_t PreVarLock; /* (P) */
01603 #endif
01604 LONG StopWatchZero; /* For `timer_' and #reset timer */
01605 LONG InOutBuf; /* (P) Characters in the output buf in pre.c */
01606 LONG pSize; /* (P) size of preStart */
01607 int PreAssignFlag; /* (C) Indicates #assign -> catch dollar */
01608 int PreContinuation; /* (C) Indicates whether the statement is new */
01609 int PreproFlag; /* (P) Internal use to mark work on prepro instr. */
01610 int iBufError; /* (P) Flag for errors with input buffer */

```

```

01611     int      PreOut;                /* (P) Flag for #+ #- */
01612     int      PreSwitchLevel;        /* (P) Nesting of #switch */
01613     int      NumPreSwitchStrings;    /* (P) Size of PreSwitchStrings */
01614     int      MaxPreTypes;            /* (P) Size of PreTypes */
01615     int      NumPreTypes;            /* (P) Number of nesting objects in PreTypes */
01616     int      MaxPreIfLevel;          /* (C) Maximum number of nested #if. Dynamic */
01617     int      PreIfLevel;             /* (C) Current position if PreIfStack */
01618     int      PreInsideLevel;         /* (C) #inside active? */
01619     int      DelayPrevar;            /* (P) Delaying prevar substitution */
01620     int      AllowDelay;             /* (P) Allow delayed prevar substitution */
01621     int      lhdollarerror;          /* (R) */
01622     int      eat;                    /* ( ) */
01623     int      gNumPre;                /* (P) Number of preprocessor variables for .clear */
01624     int      PreDebug;               /* (C) */
01625     int      OpenDictionary;
01626     int      PreAssignLevel;         /* For nesting # $name = ...; assignments */
01627     int      MaxPreAssignLevel;      /* For nesting # $name = ...; assignments */
01628     int      fullnamesize;           /* size of the fullname buffer */
01629     WORD     DebugFlag;              /* (P) For debugging purposes */
01630     WORD     preError;               /* (P) Blocks certain types of execution */
01631     UBYTE    ComChar;               /* (P) Commentary character */
01632     UBYTE    cComChar;              /* (P) Old commentary character for .clear */
01633 };
01634
01635 /*
01636     #] P :
01637     #[ C : The C struct defines objects changed by the compiler
01638 */
01639
01640 struct C_const {
01641     set_of_char separators;
01642     POSITION StoreFileSize;           /* ( ) Size of store file */
01643     NAMETREE *dollarnames;
01644     NAMETREE *exprnames;
01645     NAMETREE *varnames;
01646     LIST     ChannelList;
01647
01648     /* Later also for write? */
01649     LIST     DubiousList;
01650     LIST     FunctionList;
01651     LIST     ExpressionList;
01652     LIST     IndexList;
01653     LIST     SetElementList;
01654     LIST     SetList;
01655     LIST     SymbolList;
01656     LIST     VectorList;
01657     LIST     PotModDollList;
01658     LIST     ModOptDollList;
01659     LIST     TableBaseList;
01660
01661     /* Compile buffer variables */
01662
01663     LIST     cbufList;
01664
01665     /* Objects for auto declarations */
01666
01667     LIST     AutoSymbolList;         /* (C) */
01668     LIST     AutoIndexList;          /* (C) */
01669     LIST     AutoVectorList;         /* (C) */
01670     LIST     AutoFunctionList;       /* (C) */
01671     NAMETREE *autonames;
01672     LIST     *Symbols;               /* (C) Pointer for autodeclare. Which list is
01673                                     it searching. Later also for subroutines */
01674     LIST     *Indices;               /* (C) id. */
01675     LIST     *Vectors;               /* (C) id. */
01676     LIST     *Functions;             /* (C) id. */
01677     NAMETREE **activenames;
01678     STREAM   *Streams;
01679     STREAM   *CurrentStream;
01680     SWITCH   *SwitchArray;
01681     MODEL    **models;
01682     WORD     *SwitchHeap;
01683     LONG     *termstack;
01684     LONG     *termsortstack;
01685     UWORD    *cmmod;
01686     UWORD    *powmod;
01687     UWORD    *modpowers;
01688     UWORD    *halfmod;              /* (C) half the modulus when not zero */
01689     WORD     *ProtoType;            /* (C) The subexpression prototype {wildcards} */
01690     WORD     *WildC;                /* (C) Filling point for wildcards. */
01691     LONG     *IfHeap;
01692     LONG     *IfCount;
01693     LONG     *IfStack;
01694     UBYTE    *iBuffer;
01695     UBYTE    *iPointer;
01696     UBYTE    *iStop;
01697     UBYTE    **LabelNames;
01698     WORD     *FixIndices;

```

```

01710 WORD      *termssumcheck;
01711 UBYTE     *WildcardNames;
01712 int       *Labels;
01713 SBYTE     *tokens;
01714 SBYTE     *toptokens;
01715 SBYTE     *endoftokens;
01716 WORD      *tokenarglevel;
01717 UWORD     *modinverses;          /* Table for inverses of primes */
01718 UBYTE     *Fortran90Kind;        /* The kind of number in Fortran 90 as in _ki */
01719 WORD      **MultiBracketBuf;     /* Array of buffers for multi-level brackets */
01720 UBYTE     *extrasyms;            /* Array with the name for extra symbols in ToPolynomial */
01721 WORD      *doloopstack;          /* To keep track of begin and end of doloops */
01722 WORD      *doloopnest;           /* To keep track of nesting of doloops etc */
01723 char      *CheckpointRunAfter;
01725 char      *CheckpointRunBefore;
01727 WORD      *IfSumCheck;
01728 WORD      *CommuteInSet;         /* groups of noncommuting functions that can commute */
01729 UBYTE     *TestValue;           /* For debugging */
01730 #ifdef PARALLELCODE
01731 LONG      *inputnumbers;
01732 WORD      *pfirstnum;
01733 #endif
01734 #ifdef WITHPTHREADS
01735 pthread_mutex_t halfmodlock;     /* () Lock for adding buffer for halfmod */
01736 #endif
01737 LONG      argstack[MAXNEST];     /* (C) {contents} Stack for nesting of Argument */
01738 LONG      insidestack[MAXNEST];  /* (C) {contents} Stack for Argument or Inside. */
01739 LONG      inexprstack[MAXNEST];  /* (C) {contents} Stack for Argument or Inside. */
01740 LONG      iBufferSize;           /* (C) Size of the input buffer */
01741 LONG      TransEname;            /* (C) Used when a new definition overwrites
01742                                an old expression. */
01743 LONG      ProcessBucketSize;     /* (C) */
01744 LONG      mProcessBucketSize;    /* (C) */
01745 LONG      CModule;              /* (C) Counter of current module */
01746 LONG      ThreadBucketSize;      /* (C) Roughly the maximum number of input terms */
01747 LONG      CheckpointStamp;
01748 LONG      CheckpointInterval;
01750 #ifdef WITHFLOAT
01751 LONG      DefaultPrecision;       /* (C) Default precision in bits for float_ */
01752 LONG      MaxWeight;             /* (C) Maximum weight for MZV or Euler */
01753 LONG      tDefaultPrecision;     /* (C) Default precision in bits for float_ */
01754 LONG      tMaxWeight;            /* (C) Maximum weight for MZV or Euler */
01755 #endif
01756 int       cbufnum;
01757 int       AutoDeclareFlag;
01759 int       NoShowInput;           /* (C) No listing of input as in .prc, #do */
01760 int       ShortStats;            /* (C) */
01761 int       compiletype;           /* (C) type of statement {DECLARATION etc} */
01762 int       firstconstindex;       /* (C) flag for giving first error message */
01763 int       insidefirst;           /* (C) Not used yet */
01764 int       minsidefirst;          /* (?) Not used yet */
01765 int       wildflag;              /* (C) Flag for marking use of wildcards */
01766 int       NumLabels;             /* (C) Number of labels {in Labels} */
01767 int       MaxLabels;             /* (C) Size of Labels array */
01768 int       lDefDim;               /* (C) */
01769 int       lDefDim4;              /* (C) */
01770 int       NumWildcardNames;       /* (C) Number of ?a variables */
01771 int       WildcardBufferSize;     /* (C) size of WildcardNames buffer */
01772 int       MaxIf;                 /* (C) size of IfHeap, IfSumCheck, IfCount */
01773 int       NumStreams;             /* (C) */
01774 int       MaxNumStreams;          /* (C) */
01775 int       firstctypemessage;     /* (C) Flag for giving first st order error */
01776 int       tablecheck;            /* (C) For table checking */
01777 int       idoption;              /* (C) */
01778 int       BottomLevel;           /* (C) For propercount. Not used!!! */
01779 int       CompileLevel;          /* (C) Subexpression level */
01780 int       TokensWriteFlag;        /* (C) */
01781 int       UnsureDollarMode;      /* (C) ?Controls error messages undefined $'s */
01782 int       outsidefun;            /* (C) Used for writing Tables to file */
01783 int       funpowers;             /* (C) */
01784 int       WarnFlag;              /* (C) */
01785 int       StatsFlag;             /* (C) */
01786 int       NamesFlag;             /* (C) */
01787 int       CodesFlag;             /* (C) */
01788 int       SetupFlag;             /* (C) */
01789 int       SortType;              /* (C) */
01790 int       lSortType;             /* (C) */
01791 int       ThreadStats;           /* (C) */
01792 int       FinalStats;            /* (C) */
01793 int       OldParallelStats;       /* (C) */
01794 int       ThreadsFlag;
01795 int       ThreadBalancing;
01796 int       ThreadSortFileSynch;
01797 int       ProcessStats;          /* (C) */
01798 int       BracketNormalize;       /* (C) Indicates whether the bracket st is normalized */
01799 int       maxtermlevel;          /* (C) Size of termstack */
01800 int       dumnumflag;            /* (C) Where there dummy indices in tokenizer? */

```

```

18101    int    bracketindexflag;    /* (C) Are brackets going to be indexed? */
18102    int    parallelflag;        /* (C) parallel allowed? */
18103    int    mparallelflag;       /* (C) parallel allowed in this module? */
18104    int    inparallelflag;      /* (C) inparallel allowed? */
18105    int    partodoflag;         /* (C) parallel allowed? */
18106    int    properorderflag;     /* (C) clean normalizing. */
18107    int    vetofilling;         /* (C) vetoes overwriting in tablebase stubs */
18108    int    tablefilling;        /* (C) to notify AddrHS we are filling a table */
18109    int    vetotablebasefill;   /* (C) For the load in tablebase */
18110    int    exprfillwarning;     /* (C) Warning has been printed for expressions in fill statements */
18111    /*
18112    int    lhdollarflag;        /* (R) left hand dollar present */
18113    int    NoCompress;          /* (R) Controls native compression */
18114    int    IsFortran90;         /* Tells whether the Fortran is Fortran90 */
18115    int    MultiBracketLevels;  /* Number of elements in MultiBracketBuf */
18116    int    topolynomialflag;     /* To avoid ToPolynomial and FactArg together */
18117    int    ffbufnum;            /* Buffer number for user defined factorizations */
18118    int    OldFactArgFlag;      /* Only used when MALLOCDEBUG in tools.c */
18119    int    OldGCDflag;
18120    int    WTimeStatsFlag;
18121    int    SortReallocateFlag;  /* Controls reallocation of large+small buffer at module end.
18122                                0 : Off
18123                                1 : On, every module (set by On sortreallocate);
18124                                2 : On, single module (set by #sortreallocate) */
18125    int    PrintBacktraceFlag;  /* Print backtrace on terminate? */
18126    int    FlintPolyFlag;       /* Use Flint for polynomial arithmetic */
18127    int    HumanStatsFlag;      /* Print human-readable stats in the stats print? */
18128    int    doloopstacksize;
18129    int    dolooplevel;
18130    int    CheckpointFlag;
18134    int    SizeCommuteInSet;    /* Size of the CommuteInSet buffer */
18135    #ifdef PARALLELCODE
18136    int    numpfirstnum;        /* For redefine */
18137    int    sizepffirstnum;      /* For redefine */
18138    #endif
18139    int    origin;              /* Determines whether .sort or ModuleOption */
18140    int    vectorlikeLHS;
18141    int    nummodels;
18142    int    modelspace;
18143    int    ModelLevel;
18144    int    ShortStatsMax;       /* For On FewerStatistics 10; */
18145    int    InnerTest;           /* For debugging */
18146    WORD    argsumcheck[MAXNEST]; /* (C) Checking of nesting */
18147    WORD    insidesumcheck[MAXNEST]; /* (C) Checking of nesting */
18148    WORD    inexprsumcheck[MAXNEST]; /* (C) Checking of nesting */
18149    WORD    RepSumCheck[MAXREPEAT]; /* (C) Checks nesting of repeat, if, argument */
18150    WORD    lUnitTrace[4];      /* (C) */
18151    WORD    RepLevel;           /* (C) Tracks nesting of repeat. */
18152    WORD    arglevel;           /* (C) level of nested argument statements */
18153    WORD    insidelevel;        /* (C) level of nested inside statements */
18154    WORD    inexprlevel;        /* (C) level of nested inexpr statements */
18155    WORD    termlevel;          /* (C) level of nested term statements */
18156    WORD    MustTestTable;      /* (C) Indicates whether tables have been changed */
18157    WORD    DumNum;             /* (C) */
18158    WORD    ncmod;              /* (C) Local setting of modulus. size of cmod */
18159    WORD    npowmod;            /* (C) Local printing as powers. size powmod */
18160    WORD    modmode;            /* (C) Mode for modulus calculus */
18161    WORD    nhalfmod;           /* relevant word size of halfmod when defined */
18162    WORD    DirtPow;            /* (C) Flag for changes in printing mod powers */
18163    WORD    lUnitTrace;         /* (C) Local value of Tr[1] */
18164    WORD    NwildC;             /* (C) Wildcard counter */
18165    WORD    ComDefer;           /* (C) defer brackets */
18166    WORD    CollectFun;         /* (C) Collect function number */
18167    WORD    AltCollectFun;      /* (C) Alternate Collect function number */
18168    WORD    OutputMode;         /* (C) */
18169    WORD    Cnumpows;
18170    WORD    OutputSpaces;       /* (C) */
18171    WORD    OutNumberType;      /* (C) Controls RATIONAL/FLOAT output */
18172    WORD    DidClean;           /* (C) Test whether nametree needs cleaning */
18173    WORD    IfLevel;            /* (C) */
18174    WORD    WhileLevel;         /* (C) */
18175    WORD    SwitchLevel;
18176    WORD    SwitchInArray;
18177    WORD    MaxSwitch;
18178    WORD    LogHandle;          /* (C) The Log File */
18179    WORD    LineLength;         /* (C) */
18180    WORD    StoreHandle;        /* (C) Handle of .str file */
18181    WORD    HideLevel;          /* (C) Hiding indicator */
18182    WORD    lPolyFun;           /* (C) local value of PolyFun */
18183    WORD    lPolyFunInv;        /* (C) local value of Inverse of PolyFun */
18184    WORD    lPolyFunType;       /* (C) local value of PolyFunType */
18185    WORD    lPolyFunExp;
18186    WORD    lPolyFunVar;
18187    WORD    lPolyFunPow;
18188    WORD    SymChangeFlag;      /* (C) */
18189    WORD    CollectPercentage;  /* (C) Collect function percentage */

```



```

01890     WORD    extrasymbols;           /* Flag for the extra symbols output mode */
01891     WORD    PolyRatFunChanged;       /* Keeps track whether we changed in the compiler */
01892     WORD    ToBeInFactors;
01893 #ifdef WITHMPI
01894     WORD    RhsExprInModuleFlag;     /* (C) Set by the compiler if RHS expressions exists. */
01895 #endif
01896     UBYTE    Commercial[COMMERCIALSIZE+2]; /* (C) Message to be printed in statistics */
01897     UBYTE    debugFlags[MAXFLAGS+2];  /* On/Off Flag number(s) */
01898 };
01899 /*
01900     #] C :
01901     #[ S : The S struct defines objects changed at the start of the run (Processor)
01902           Basically only set by the master.
01903 */
01911 struct S_const {
01912     POSITION  MaxExprSize;             /* ( ) Maximum size of in/out/sort */
01913 #ifdef WITHPTHREADS
01914     pthread_mutex_t inputslock;
01915     pthread_mutex_t outputslock;
01916     pthread_mutex_t MaxExprSizeLock;
01917 #endif
01918     POSITION  *OldOnFile;               /* (S) File positions of expressions */
01919     WORD     *OldNumFactors;           /* ( ) NumFactors in (old) expression */
01920     WORD     *Oldvflags;              /* ( ) vflags in (old) expression */
01921     WORD     *Olduflags;              /* ( ) uflags in (old) expression */
01922 #ifdef WITHFLOAT
01923     void     *delta_l;
01924 #endif
01925     int      NumOldOnFile;             /* (S) Number of expressions in OldOnFile */
01926     int      NumOldNumFactors;         /* (S) Number of expressions in OldNumFactors */
01927     int      MultiThreaded;           /* (S) Are we running multi-threaded? */
01928 #ifdef WITHPTHREADS
01929     int      MasterSort;               /* Final stage of sorting to the master */
01930 #endif
01931 #ifdef WITHMPI
01932     int      printflag;                /* controls MesPrint() on each slave */
01933 #endif
01934     int      Balancing;                /* For second stage loadbalancing */
01935     WORD     ExecMode;                 /* (S) */
01936
01937     WORD     CollectOverFlag;          /* (R) Indicates overflow at Collect */
01938 #ifdef WITHPTHREADS
01939     WORD     sLevel;                   /* Copy of AR0.sLevel because it can get messy */
01940 #endif
01941 };
01942 /*
01943     #] S :
01944     #[ R : The R struct defines objects changed at run time.
01945           They determine the environment that has to be transferred
01946           together with a term during multithreaded execution.
01947 */
01956 struct R_const {
01957     FILEDATA  StoreData;               /* (O) */
01958     FILEHANDLE Fscr[3];                /* (R) Dollars etc play with it too */
01959     FILEHANDLE FoStage4[2];            /* (R) In Sort. Stage 4. */
01960     POSITION  DefPosition;              /* (R) Deferred position of keep brackets. */
01961     FILEHANDLE *infile;                /* (R) Points alternately to Fscr[0] or Fscr[1] */
01962     FILEHANDLE *outfile;               /* (R) Points alternately to Fscr[1] or Fscr[0] */
01963     FILEHANDLE *hidefile;              /* (R) Points to Fscr[2] */
01964
01965     WORD     *CompressBuffer;          /* (M) */
01966     WORD     *ComprTop;                /* (M) */
01967     WORD     *CompressPointer;         /* (R) */
01968     COMPAREDUMMY CompareRoutine;
01969     ULONG    *wranfia;
01970     SBYTE    *moebiustable;
01971
01972     LONG     OldTime;                  /* (R) Zero time. Needed in timer. */
01973     LONG     InInBuf;                  /* (R) Characters in input buffer. Scratch files. */
01974     LONG     InHiBuf;                  /* (R) Characters in hide buffer. Scratch file. */
01975     LONG     pWorkSize;                /* (R) Size of pWorkSpace */
01976     LONG     lWorkSize;                /* (R) Size of lWorkSpace */
01977     LONG     posWorkSize;              /* (R) Size of posWorkSpace */
01978     ULONG    wranfseed;
01979     int      NoCompress;                /* (R) Controls native compression */
01980     int      gzipCompress;             /* (R) Controls gzip compression */
01981     int      Cnumlhs;                  /* Local copy of cbuf[rbufnum].numlhs */
01982     int      outtohide;                /* Indicates that output is directly to hide */
01983 #ifdef WITHPTHREADS
01984     int      exprtoto;                 /* The expression to do in parallel mode */
01985 #endif
01986     int      wranfcall;
01987     int      wranfnpair1;
01988     int      wranfnpair2;
01989 #if ( BITSINWORD == 32 )
01990     WORD     PrimeList[5000];
01991     WORD     numinprimelist;

```



```

01992     WORD    notfirstprime;
01993 #endif
01994     WORD    GetFile;                /* (R) Where to get the terms {like Hide} */
01995     WORD    KeptInHold;             /* (R) */
01996     WORD    BracketOn;              /* (R) Intensely used in poly_ */
01997     WORD    MaxBracket;             /* (R) Size of BrackBuf. Changed by poly_ */
01998     WORD    CurDum;                 /* (R) Current maximum dummy number */
01999     WORD    DeferFlag;              /* (R) For deferred brackets */
02000     WORD    TePos;                  /* (R) */
02001     WORD    sLevel;                 /* (R) Sorting level */
02002     WORD    Stage4Name;             /* (R) Sorting only */
02003     WORD    GetOneFile;             /* (R) Getting from hide or regular */
02004     WORD    PolyFun;                 /* (C) Number of the PolyFun function */
02005     WORD    PolyFunInv;             /* (C) Number of the Inverse of the PolyFun function */
02006     WORD    PolyFunType;            /* (I) value of PolyFunType */
02007     WORD    PolyFunExp;
02008     WORD    PolyFunVar;
02009     WORD    PolyFunPow;
02010     WORD    Eside;                  /* (I) Tells which side of = sign */
02011     WORD    MaxDum;                 /* Maximum dummy value in an expression */
02012     WORD    level;                  /* Running level in Generator */
02013     WORD    expchanged;             /* (R) Info about expression */
02014     WORD    expflags;               /* (R) Info about expression */
02015     WORD    CurExpr;                /* (S) Number of current expression */
02016     WORD    SortType;               /* A copy of AC.SortType to play with */
02017     WORD    ShortSortCount;         /* For On FewerStatistics 10; */
02018     WORD    modeloptions;
02019     WORD    funoffset;
02020     WORD    moebiustablesizes;
02021 };
02022
02023 /*
02024     #] R :
02025     #[ T : These are variables that stay in each thread during multi threaded execution.
02026 */
02027 struct T_const {
02028 #ifdef WITHPTHREADS
02029     SORTBLOCK SB;
02030 #endif
02031     SORTING *S0;                    /* (-) The thread specific sort buffer */
02032     SORTING *SS;                    /* (R) Current sort buffer */
02033     NESTING Nest;                   /* (R) Nesting of function levels etc. */
02034     NESTING NestStop;               /* (R) */
02035     NESTING NestPoin;               /* (R) */
02036     WORD *BrackBuf;                 /* (R) Bracket buffer. Used by poly_ at runtime. */
02037     STORECACHE StoreCache;          /* (R) Cache for picking up stored expr. */
02038     STORECACHE StoreCacheAlloc;     /* (R) Permanent address of StoreCache to keep valgrind happy */
02039     WORD **pWorkSpace;              /* (R) Workspace for pointers. Dynamic. */
02040     LONG *lWorkSpace;               /* (R) Workspace for LONG. Dynamic. */
02041     POSITION *posWorkSpace;           /* (R) Workspace for file positions */
02042     WORD *WorkSpace;                /* (M) */
02043     WORD *WorkTop;                  /* (M) */
02044     WORD *WorkPointer;               /* (R) Pointer in the Workspace heap. */
02045     int *RepCount;                  /* (M) Buffer for repeat nesting */
02046     int *RepTop;                    /* (M) Top of RepCount buffer */
02047     WORD *WildArgTaken;              /* (N) Stack for wildcard pattern matching */
02048     UWORD *factorials;              /* (T) buffer of factorials. Dynamic. */
02049     WORD *small_power_n;             /* length of the number */
02050     UWORD **small_power;             /* the number */
02051     UWORD *bernoullis;              /* (T) The buffer with Bernoulli numbers. Dynamic. */
02052     WORD *primelist;
02053     LONG *pfac;                     /* (T) array of positions of factorials. Dynamic. */
02054     LONG *pBer;                     /* (T) array of positions of Bernoulli's. Dynamic. */
02055     WORD *TMaddr;                   /* (R) buffer for TestSub */
02056     WORD *WildMask;                 /* (N) Wildcard info during pattern matching */
02057     WORD *previousEfactor;           /* (I) Cache for factors in expressions */
02058     WORD **TermMemHeap;              /* For TermMalloc. Set zero in Checkpoint */
02059     UWORD **NumberMemHeap;           /* For NumberMalloc. Set zero in Checkpoint */
02060     UWORD **CacheNumberMemHeap;      /* For CacheNumberMalloc. Set zero in Checkpoint */
02061     BRACKETINFO *bracketinfo;
02062     WORD **ListPoly;
02063     WORD *ListSymbols;
02064     UWORD *NumMem;
02065     WORD *TopologiesTerm;
02066     WORD *TopologiesStart;
02067 #ifdef WITHFLOAT
02068     WORD *indil;
02069     WORD *indi2;
02070     void *mpf_tab1;
02071     void *mpf_tab2;
02072     void *aux_;
02073     void *auxr_;
02074 #endif
02075     PARTI partitions;
02076     LONG sBer;                      /* (T) Size of the Bernoullis buffer */
02077     LONG pWorkPointer;              /* (R) Offset-pointer in pWorkSpace */
02078     LONG lWorkPointer;              /* (R) Offset-pointer in lWorkSpace */

```

```

02087     LONG    posWorkPointer;        /* (R) Offset-pointer in posWorkSpace */
02088     LONG    InNumMem;
02089     int      sfact;                  /* (T) size of the factorials buffer */
02090     int      mfac;                   /* (T) size of the pfac array. */
02091     int      ebufnum;                /* (R) extra compiler buffer */
02092     int      fbufnum;                /* extra compiler buffer for factorization cache */
02093     int      allbufnum;              /* extra compiler buffer for id,all */
02094     int      aebufnum;               /* extra compiler buffer for id,all */
02095     int      idallflag;              /* indicates use of id,all buffers */
02096     int      idallnum;
02097     int      idallmaxnum;
02098     int      WildcardBufferSize;     /* () local copy for updates */
02099 #ifdef WITHPTHREADS
02100     int      identity;               /* () When we work with B->T */
02101     int      LoadBalancing;         /* Needed for synchronization */
02102 #ifdef WITHSORTBOTS
02103     int      SortBotIn1;             /* Input stream 1 for a SortBot */
02104     int      SortBotIn2;             /* Input stream 2 for a SortBot */
02105 #endif
02106 #endif
02107     int      TermMemMax;              /* For TermMalloc. Set zero in Checkpoint */
02108     int      TermMemTop;              /* For TermMalloc. Set zero in Checkpoint */
02109     int      NumberMemMax;            /* For NumberMalloc. Set zero in Checkpoint */
02110     int      NumberMemTop;            /* For NumberMalloc. Set zero in Checkpoint */
02111     int      CacheNumberMemMax;       /* For CacheNumberMalloc. Set zero in Checkpoint */
02112     int      CacheNumberMemTop;       /* For CacheNumberMalloc. Set zero in Checkpoint */
02113     int      bracketindexflag;        /* Are brackets going to be indexed? */
02114     int      optentimes;              /* Number of the evaluation of the MCTS tree */
02115     int      ListSymbolsSize;
02116     int      NumListSymbols;
02117     int      numpoly;
02118     int      LeaveNegative;
02119     int      TrimPower;               /* Indicates trimming in polyratfun expansion */
02120     WORD     small_power_maxx;        /* size of the cache for small powers */
02121     WORD     small_power_maxn;        /* size of the cache for small powers */
02122     WORD     dummysubexp[SUBEXPSIZE+4]; /* () used in normal.c */
02123     WORD     comsym[8];               /* () Used in tools.c = {8,SYMBOL,4,0,1,1,1,3} */
02124     WORD     comnum[4];               /* () Used in tools.c = { 4,1,1,3 } */
02125     WORD     comfun[FUNHEAD+4];       /* () Used in tools.c = {7,FUNCTION,3,0,1,1,3} */
02126                                     /* or { 8,FUNCTION,4,0,0,1,1,3 } */
02127     WORD     comind[7];               /* () Used in tools.c = {7,INDEX,3,0,1,1,3} */
02128     WORD     MinVecArg[7+ARGHEAD];    /* (N) but should be more local */
02129     WORD     FunArg[4+ARGHEAD+FUNHEAD]; /* (N) but can be more local */
02130     WORD     locwildvalue[SUBEXPSIZE]; /* () Used in argument.c = {SUBEXPRESSION,SUBEXPSIZE,0,0,0} */
02131     WORD     mulpat[SUBEXPSIZE+5];    /* () Used in argument.c = {TYPEMULT, SUBEXPSIZE+3, 0, */
02132                                     /* SUBEXPRESSION, SUBEXPSIZE, 0, 1, 0, 0, 0 } */
02133     WORD     proexp[SUBEXPSIZE+5];    /* () Used in poly.c */
02134     WORD     TMout[40];               /* (R) Passing info */
02135     WORD     TMbuff;                  /* (R) Communication between TestSub and Genera */
02136     WORD     TMdolfac;                /* factor number for dollar */
02137     WORD     nfac;                    /* (T) Number of highest stored factorial */
02138     WORD     nBer;                    /* (T) Number of highest Bernoulli number. */
02139     WORD     mBer;                    /* (T) Size of buffer pBer. */
02140     WORD     PolyAct;                 /* (R) Used for putting the PolyFun at end. ini at 0 */
02141     WORD     RecFlag;                 /* (R) Used in TestSub. ini at zero. */
02142     WORD     inprimelist;
02143     WORD     sizeprimelist;
02144     WORD     fromindex;                /* Tells the compare routine whether call from index */
02145     WORD     setinterntopo;            /* Set of internal momenta for topogen */
02146     WORD     setexterntopo;           /* Set of external momenta for topogen */
02147     WORD     TopologiesLevel;
02148     WORD     TopologiesOptions[2];
02149 #ifdef WITHFLOAT
02150     WORD     FloatPos;
02151     WORD     SortFloatMode;
02152 #endif
02153 };
02154 /*
02155     #] T :
02156     #[ N : The N struct contains variables used in running information
02157            that is inside blocks that should not be split, like pattern
02158            matching, traces etc. They are local for each thread.
02159            They don't need initializations.
02160 */
02161 struct N_const {
02162     POSITION OldPosIn;                 /* (R) Used in sort. */
02163     POSITION OldPosOut;                /* (R) Used in sort */
02164     POSITION theposition;               /* () Used in index.c */
02165     WORD     *EndNest;                 /* (R) Nesting of function levels etc. */
02166     WORD     *Frozen;                  /* (R) Bracket info */
02167     WORD     *FullProto;               /* (R) Prototype of a subexpression or table */
02168     WORD     *cTerm;                   /* (R) Current term for coef_ and term_ */
02169     int      *RepPoint;                /* (R) Pointer in RepCount buffer. Tracks repeat */
02170     WORD     *WildValue;               /* (N) Wildcard info during pattern matching */
02171     WORD     *WildStop;                /* (N) Wildcard info during pattern matching */
02172     WORD     *argaddress;              /* (N) Used in pattern matching of arguments */
02173     WORD     *RepFunList;              /* (N) For pattern matching */

```

```

02182     WORD    *patstop;           /* (N) Used in pattern matching */
02183     WORD    *terstop;           /* (N) Used in pattern matching */
02184     WORD    *terstart;          /* (N) Used in pattern matching */
02185     WORD    *terfirstcomm;      /* (N) Used in pattern matching */
02186     WORD    *DumFound;          /* (N) For renumbering indices {make local?} */
02187     WORD    **DumPlace;         /* (N) For renumbering indices {make local?} */
02188     WORD    **DumFunPlace;      /* (N) For renumbering indices {make local?} */
02189     WORD    *UsedSymbol;        /* (N) When storing terms of a global expr. */
02190     WORD    *UsedVector;        /* (N) When storing terms of a global expr. */
02191     WORD    *UsedIndex;         /* (N) When storing terms of a global expr. */
02192     WORD    *UsedFunction;      /* (N) When storing terms of a global expr. */
02193     WORD    *MaskPointer;       /* (N) For wildcard pattern matching */
02194     WORD    *ForFindOnly;       /* (N) For wildcard pattern matching */
02195     WORD    *findTerm;          /* (N) For wildcard pattern matching */
02196     WORD    *findPattern;       /* (N) For wildcard pattern matching */
02197 #ifdef WITHZLIB
02198     Bytef    **ziobufnum;       /* () Used in compress.c */
02199     Bytef    *ziobuffers;       /* () Used in compress.c */
02200 #endif
02201     WORD    *dummyrenumlist;    /* () Used in execute.c and store.c */
02202     int      *funargs;          /* () Used in lus.c */
02203     WORD    **funlocs;          /* () Used in lus.c */
02204     int      *funinds;          /* () Used in lus.c */
02205     UWORD    *NoScrat2;         /* () Used in normal.c */
02206     WORD    *ReplaceScrat;      /* () Used in normal.c */
02207     TRACES    *tracestack;      /* () used in opera.c */
02208     WORD    *selecttermundo;    /* () Used in pattern.c */
02209     WORD    *patternbuffer;     /* () Used in pattern.c */
02210     WORD    *termbuffer;        /* () Used in pattern.c */
02211     WORD    **PoinScrat;        /* () used in reshuf.c */
02212     WORD    **FunScrat;         /* () used in reshuf.c */
02213     WORD    *RenumScrat;        /* () used in reshuf.c */
02214     FUN_INFO *FunInfo;          /* () Used in smart.c */
02215     WORD    **SplitScrat;       /* () Used in sort.c */
02216     WORD    **SplitScrat1;      /* () Used in sort.c */
02217     SORTING  **FunSorts;        /* () Used in sort.c */
02218     UWORD    *SoScratC;         /* () Used in sort.c */
02219     WORD    *listinprint;       /* () Used in proces.c and message.c */
02220     WORD    *currentTerm;       /* () Used in proces.c and message.c */
02221     WORD    **arglist;          /* () Used in function.c */
02222     int      *tlistbuf;         /* () used in lus.c */
02223 #ifdef WHICHSUBEXPRESSION
02224     UWORD    *BinoScrat;        /* () Used in proces.c */
02225 #endif
02226     WORD    *compressSpace;     /* () Used in sort.c */
02227 #ifdef WITHPTHREADS
02228     THREADBUCKET *threadbuck;
02229     EXPRESSIONS expr;
02230 #endif
02231     UWORD    *SHcombi;
02232     WORD    *poly_vars;
02233     UWORD    *cmmod;            /* Local setting of modulus. Pointer to value. */
02234     SHvariables SHvar;
02235     LONG     deferskipped;       /* () Used in proces.c store.c and parallel.c */
02236     LONG     InScrat;            /* () Used in sort.c */
02237     LONG     SplitScratSize;     /* () Used in sort.c */
02238     LONG     InScrat1;           /* () Used in sort.c */
02239     LONG     SplitScratSize1;    /* () Used in sort.c */
02240     LONG     ninterms;           /* () Used in proces.c and sort.c */
02241 #ifdef WITHPTHREADS
02242     LONG     inputnumber;        /* () For use in redefine */
02243     LONG     lastinindex;
02244 #endif
02245 #ifdef WHICHSUBEXPRESSION
02246     LONG     last2;              /* () Used in proces.c */
02247     LONG     last3;              /* () Used in proces.c */
02248 #endif
02249     LONG     SHcombiSize;
02250     int      NumTotWildArgs;     /* (N) Used in pattern matching */
02251     int      UseFindOnly;        /* (N) Controls pattern routines */
02252     int      UsedOtherFind;      /* (N) Controls pattern routines */
02253     int      ErrorInDollar;      /* (R) */
02254     int      numfargs;           /* () Used in lus.c */
02255     int      numflocs;           /* () Used in lus.c */
02256     int      nargs;              /* () Used in lus.c */
02257     int      tohunt;             /* () Used in lus.c */
02258     int      numoffuns;          /* () Used in lus.c */
02259     int      funisize;           /* () Used in lus.c */
02260     int      RSsize;             /* () Used in normal.c */
02261     int      numracesctack;      /* () used in opera.c */
02262     int      intracestack;       /* () used in opera.c */
02263     int      numfuninfo;         /* () Used in smart.c */
02264     int      NumFunSorts;        /* () Used in sort.c */
02265     int      MaxFunSorts;        /* () Used in sort.c */
02266     int      arglistsize;        /* () Used in function.c */
02267     int      tlistsize;          /* () used in lus.c */
02268     int      filenum;            /* () used in setfile.c */

```

```

02269     int        compressSize;          /* () Used in sort.c */
02270     int        polysortflag;
02271     int        nogroundlevel;          /* () Used to see whether pattern matching at groundlevel */
02272     int        subsubveto;             /* () Sabotage combining subexpressions in TestSub */
02273     WORD       MaxRenumScratch;        /* () used in reshuf.c */
02274     WORD       oldtype;                /* (N) WildCard info at pattern matching */
02275     WORD       oldvalue;               /* (N) WildCard info at pattern matching */
02276     WORD       NumWild;               /* (N) Used in Wildcard */
02277     WORD       RepFunNum;              /* (N) Used in pattern matching */
02278     WORD       DisOrderFlag;           /* (N) Disorder option? Used in pattern matching */
02279     WORD       WildDirt;               /* (N) dirty in wildcard substitution. */
02280     WORD       NumFound;               /* (N) in reshuf only. Local? */
02281     WORD       WildReserve;            /* (N) Used in the wildcards */
02282     WORD       TeInFun;                /* (R) Passing type of action */
02283     WORD       TeSuOut;                /* (R) Passing info. Local? */
02284     WORD       WildArgs;               /* (R) */
02285     WORD       WildEat;                /* (R) */
02286     WORD       PolyNormFlag;           /* (R) For polynomial arithmetic */
02287     WORD       PolyFunTodo;            /* deals with expansions and multiplications */
02288     WORD       sizeselecttermundo;     /* () Used in pattern.c */
02289     WORD       patternbuffersize;      /* () Used in pattern.c */
02290     WORD       numlistinprint;         /* () Used in process.c */
02291     WORD       ncmod;                  /* () used as some type of flag to disable */
02292     WORD       ExpectedSign;
02293     WORD       SignCheck;
02294     WORD       IndDum;                  /* Active dummy indices */
02295     WORD       poly_num_vars;
02296     WORD       idfunctionflag;
02297     WORD       poly_vars_type;         /* type of allocation. For free. */
02298     WORD       tryterm;                 /* For EndSort(...,2) */
02299     #ifdef WHICHSUBEXPRESSION
02300         WORD     nbino;                 /* () Used in proces.c */
02301         WORD     last1;                 /* () Used in proces.c */
02302     #endif
02303 };
02304
02305 /*
02306     #] N :
02307     #[ O : The O struct concerns output variables
02308 */
02317 struct O_const {
02318     FILEDATA    SaveData;              /* (O) */
02319     STOREHEADER SaveHeader;            /* () System Independent save-Files */
02320     OPTIMIZERESULT OptimizeResult;
02321     UBYTE        *OutputLine;           /* (O) Sits also in debug statements */
02322     UBYTE        *OutStop;              /* (O) Top of OutputLine buffer */
02323     UBYTE        *OutFill;              /* (O) Filling point in OutputLine buffer */
02324     WORD         *bracket;              /* (O) For writing brackets */
02325     WORD         *termbuf;              /* (O) For writing terms */
02326     WORD         *tabstring;
02327     UBYTE        *wpos;                 /* (O) Only when storing file {local?} */
02328     UBYTE        *wpoin;                /* (O) Only when storing file {local?} */
02329     UBYTE        *DollarOutBuffer;      /* (O) Outputbuffer for Dollars */
02330     UBYTE        *CurBufWrt;           /* (O) Name of currently written expr. */
02331     void (*FlipWORD)(UBYTE *);         /* () Function pointers for translations. Initialized by
ReadSaveHeader() */
02332     void (*FlipLONG)(UBYTE *);
02333     void (*FlipPOS)(UBYTE *);
02334     void (*FlipPOINTER)(UBYTE *);
02335     void (*ResizeData)(UBYTE *,int,UBYTE *,int);
02336     void (*ResizeWORD)(UBYTE *,UBYTE *);
02337     void (*ResizeNCWORD)(UBYTE *,UBYTE *);
02338     void (*ResizeLONG)(UBYTE *,UBYTE *);
02339     void (*ResizePOS)(UBYTE *,UBYTE *);
02340     void (*ResizePOINTER)(UBYTE *,UBYTE *);
02341     void (*CheckPower)(UBYTE *);
02342     void (*RenumberVec)(UBYTE *);
02343     DICTIONARY **Dictionaries;
02344     UBYTE        *tensorList;           /* Dynamically allocated list with functions that are tensorial. */
02345     WORD         *inscheme;             /* for feeding a Horner scheme to Optimize */
02346     #ifdef WITHFLOAT
02347         UBYTE        *floatspace;
02348         LONG         floatsize;
02349     #endif
02350     /*-----Leave NumInBrack as first non-pointer. This is used by the checkpoints---*/
02351     LONG         NumInBrack;            /* (O) For typing [] option in print */
02352     LONG         wlen;                  /* (O) Used to store files. */
02353     LONG         DollarOutSizeBuffer;   /* (O) Size of DollarOutBuffer */
02354     LONG         DollarInOutBuffer;     /* (O) Characters in DollarOutBuffer */
02355     #if defined(mBSD) && defined(MICROTIME)
02356         LONG         wrap;               /* (O) For statistics time. wrap around */
02357         LONG         wrapnum;            /* (O) For statistics time. wrap around */
02358     #endif
02359     OPTIMIZE Optimize;
02360     int          OutInBuffer;            /* (O) Which routine does the writing */
02361     int          NoSpacesInNumbers;     /* For very long numbers */
02362     int          BlockSpaces;           /* For very long numbers */

```

```

02363     int     CurrentDictionary;
02364     int     SizeDictionaries;
02365     int     NumDictionaries;
02366     int     CurDictNumbers;
02367     int     CurDictVariables;
02368     int     CurDictSpecials;
02369     int     CurDictFunWithArgs;
02370     int     CurDictNumberWarning;
02371     int     CurDictNotInFunctions;
02372     int     CurDictInDollars;
02373     int     gNumDictionaries;
02374     int     IndentSpace;          /* For indentation in output */
02375 #ifdef WITHFLOAT
02376     int     FloatPrec;
02377 #endif
02378     WORD     schemenum;          /* for feeding a Horner scheme to Optimize */
02379     WORD     transFlag;          /* () >0 indicates that translations have to be done */
02380     WORD     powerFlag;          /* () >0 indicates that some exponents/powers had to be adjusted
*/
02381     WORD     mpower;             /* For maxpower adjustment to larger value */
02382     WORD     resizeFlag;        /* () >0 indicates that something went wrong when resizing words
*/
02383     WORD     bufferedInd;        /* () Contains extra INDEXENTRIES, see ReadSaveIndex() for an
explanation */
02384     WORD     OutSkip;            /* (0) How many chars to skip in output line */
02385     WORD     IsBracket;          /* (0) Controls brackets */
02386     WORD     InFbrack;          /* (0) For writing only */
02387     WORD     PrintType;          /* (0) */
02388     WORD     FortFirst;          /* (0) Only in sch.c */
02389     WORD     DoubleFlag;         /* (0) Output in double precision */
02390     WORD     FactorMode;         /* When the output should be written as factors */
02391     WORD     FactorNum;          /* Number of factor currently treated */
02392     WORD     ErrorBlock;
02393     WORD     OptimizationLevel;  /* Level of optimization in the output */
02394     UBYTE     FortDotChar;       /* (0) */
02395 /*
02396 For the padding, please count also the number of int's in the OPTIMIZE struct.
02397 */
02398 };
02399 /*
02400     #] O :
02401     #[ X : The X struct contains variables that deal with the external channel
02402 */
02410 struct X_const {
02411     UBYTE *currentPrompt;
02412     UBYTE *shellname;           /* if !=NULL (default is "/bin/sh -c"), start in
the specified subshell*/
02413     UBYTE *stderrname;          /* If !=NULL (default if "/dev/null"), stderr is
redirected to the specified file*/
02414     int timeout;                /* timeout to initialize preset channels.
If timeout<0, the preset channels are
already initialized*/
02415     int killSignal;             /* signal number, SIGKILL by default*/
02416     int killWholeGroup;         /* if 0, the signal is sent only to a process,
if !=0 (default) is sent to a whole process group*/
02417     int daemonize;              /* if !=0 (default), start in a daemon mode */
02418     int currentExternalChannel;
02419 };
02420 /*
02421     #] X :
02422     #[ Definitions :
02423
02424 Note: we changed the definition from C to Cc in version 5.
02425 The reason is that everywhere the pointer to the compiler
02426 buffer was called C as well. Somehow that gave no problems but
02427 who knows what the future might bring.
02428 */
02429 #ifdef WITHPTHREADS
02430 typedef struct AllGlobals {
02431     struct M_const M;
02432     struct C_const Cc;
02433     struct S_const S;
02434     struct O_const O;
02435     struct P_const P;
02436     struct X_const X;
02437 } ALLGLOBALS;
02438
02439 typedef struct AllPrivates {
02440     struct R_const R;
02441     struct N_const N;
02442     struct T_const T;
02443 } ALLPRIVATES;
02444 #else
02445
02446
02447
02448
02449
02450
02451
02452
02453
02454
02455
02456
02457
02458
02459
02460
02461
02462
02463


```

```
02468 typedef struct AllGlobals {
02469     struct M_const M;
02470     struct C_const Cc;
02471     struct S_const S;
02472     struct R_const R;
02473     struct N_const N;
02474     struct O_const O;
02475     struct P_const P;
02476     struct T_const T;
02477     struct X_const X;
02478 } ALLGLOBALS;
02479
02480 #endif
02481
02482 /*
02483     #] Definitions :
02484     #] A :
02485     #[ FG :
02486 */
02487
02488 #ifdef WITHPTHREADS
02489 #define PHEAD ALLPRIVATES *B,
02490 #define PHEAD0 ALLPRIVATES *B
02491 #define BHEAD B,
02492 #define BHEAD0 B
02493 #else
02494 #define PHEAD
02495 #define PHEAD0 void
02496 #define BHEAD
02497 #define BHEAD0
02498 #endif
02499
02500 #ifdef ANSI
02501 typedef int (*WCN) (PHEAD WORD *,WORD *,WORD,WORD);
02502 typedef int (*WCN2) (PHEAD WORD *,WORD *);
02503 #else
02504 typedef int (*WCN) ();
02505 typedef int (*WCN2) ();
02506 #endif
02507
02508 typedef WORD (*COMPARE) (PHEAD WORD *,WORD *,WORD);
02509
02521 typedef struct FixedGlobals {
02522     WCN      Operation[8];
02523     WCN2     OperaFind[6];
02524     char     *VarType[10];
02525     char     *ExprStat[21];
02526     char     *FunNam[2];
02527     char     *swmes[3];
02528     char     *fname;
02529     char     *fname2;
02530     UBYTE    *s_one;
02531     WORD     fnamebase;
02532     WORD     fname2base;
02533     WORD     fnamesize;
02534     WORD     fname2size;
02535     UINT     cTable[256];
02536 } FIXEDGLOBALS;
02537
02538 /*
02539     #] FG :
02540 */
02541
02542 #endif
```

4.141 symmetr.c File Reference

```
#include "form3.h"
```

Include dependency graph for symmetr.c:

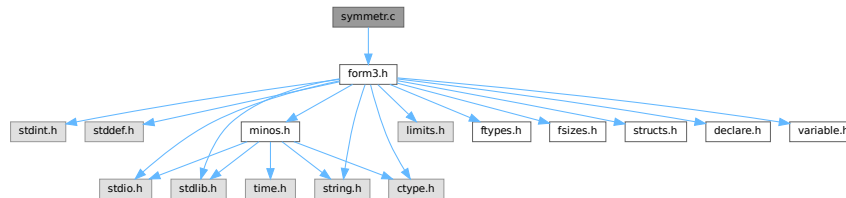

Functions

- int [MatchE](#) (PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
- int [Permute](#) ([PERM](#) *perm, WORD first)
- int [PermuteP](#) ([PERMP](#) *perm, WORD first)
- int [Distribute](#) ([DISTRIBUTE](#) *d, WORD first)
- int [MatchCy](#) (PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
- int [FunMatchCy](#) (PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
- int [FunMatchSy](#) (PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
- int [MatchArgument](#) (PHEAD WORD *arg, WORD *pat)

4.141.1 Detailed Description

The routines that deal with the pattern matching of functions with symmetric properties.

Definition in file [symmetr.c](#).

4.141.2 Function Documentation

4.141.2.1 MatchE()

```
int MatchE (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par )
```

Definition at line 56 of file [symmetr.c](#).

4.141.2.2 Permute()

```
int Permute (
    PERM * perm,
    WORD first )
```

Definition at line 444 of file [symmetr.c](#).

4.141.2.3 PermuteP()

```
int PermuteP (
    PERMP * perm,
    WORD first )
```

Definition at line 478 of file [symmetr.c](#).

4.141.2.4 Distribute()

```
int Distribute (
    DISTRIBUTE * d,
    WORD first )
```

Definition at line 510 of file [symmetr.c](#).

4.141.2.5 MatchCy()

```
int MatchCy (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par )
```

Definition at line 571 of file [symmetr.c](#).

4.141.2.6 FunMatchCy()

```
int FunMatchCy (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par )
```

Definition at line 1067 of file [symmetr.c](#).

4.141.2.7 FunMatchSy()

```
int FunMatchSy (
    PHEAD WORD * pattern,
    WORD * fun,
    WORD * inter,
    WORD par )
```

Definition at line 1525 of file [symmetr.c](#).

4.141.2.8 MatchArgument()

```
int MatchArgument (
    PHEAD WORD * arg,
    WORD * pat )
```

Definition at line 2052 of file [symmetr.c](#).

4.142 symmetr.c

[Go to the documentation of this file.](#)

```
00001
00006 /* #[] License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[] License : */
00032 /*
00033 #[] Includes : function.c
00034 */
00035
00036 #include "form3.h"
00037
00038 /*
00039 #[] Includes :
00040 #[] MatchE : WORD MatchE(pattern,fun,inter,par)
00041
00042 Matches symmetric and antisymmetric tensors.
00043 Pattern and fun point at a tensor.
00044 Problem is the wildcarding and all its possible permutations.
00045 This routine loops over all of them and calls for each
00046 possible wildcarding the recursion in ScanFunctions.
00047 Note that this can be very costly.
00048
00049 Originally this routine did only Levi Civita tensors and hence
00050 it dealt only with commuting objects.
00051 Because of the backtracking we cannot fall back to the calling
00052 ScanFunctions routine and check the sequence of functions when
00053 non-commuting objects are involved.
00054 */
00055
00056 int MatchE(PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
00057 {
00058     GETBIDENTITY
00059     WORD *m, *t, *r, i;
00060     int retval;
00061     WORD *mstop, *tstop, j, newvalue, newfun;
00062     WORD fixvec[MAXMATCH], wvec[MAXMATCH], fixind[MAXMATCH], wcind[MAXMATCH];
00063     WORD tfixvec[MAXMATCH], tfixind[MAXMATCH];
00064     WORD vvc, vfix, ifix, iwc, tvfix, tfix, nv, ni;
00065     WORD sign = 0, *rstop, first1, first2, first3, funwild;
00066     WORD *OldWork, nwstore, oRepFunNum;
00067     PERM perm1, perm2;
00068     DISTRIBUTE distr;
00069     WORD *newpat, /* *newter, *instart, */ offset;
00070     /* instart = fun; */
```

```

00071     offset = WORDDIFF(fun,AN.terstart);
00072     if ( pattern[1] != fun[1] ) return(0);
00073     if ( *pattern >= FUNCTION+WILDOFFSET ) {
00074         if ( CheckWild(BHEAD *pattern-WILDOFFSET,FUNTOFUN,*fun,&newfun) ) return(0);
00075         funwild = 1;
00076     }
00077     else funwild = 0;
00078     mstop = pattern + pattern[1];
00079     tstop = fun + fun[1];
00080     m = pattern + FUNHEAD;
00081     t = fun + FUNHEAD;
00082     while ( m < mstop ) {
00083         if ( *m != *t ) break;
00084         m++; t++;
00085     }
00086     if ( m >= mstop ) {
00087         AN.RepFunList[AN.RepFunNum++] = offset;
00088         AN.RepFunList[AN.RepFunNum++] = 0;
00089         newpat = pattern + pattern[1];
00090         if ( funwild ) {
00091             m = AN.WildValue;
00092             t = OldWork = AT.WorkPointer;
00093             nwstore = i = (m[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
00094             r = AT.WildMask;
00095             if ( i > 0 ) {
00096                 do {
00097                     *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
00098                 } while ( --i > 0 );
00099             }
00100             if ( t >= AT.WorkTop ) {
00101                 MLOCK(ErrorMessageLock);
00102                 MesWork();
00103                 MUNLOCK(ErrorMessageLock);
00104                 return(-1);
00105             }
00106             AT.WorkPointer = t;
00107             AddWild(BHEAD *pattern-WILDOFFSET,FUNTOFUN,newfun);
00108             if ( newpat >= AN.patstop ) {
00109                 if ( AN.UseFindOnly == 0 ) {
00110                     if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00111                         AN.UsedOtherFind = 1;
00112                         return(1);
00113                     }
00114                     retval = 0;
00115                 }
00116                 else return(1);
00117             }
00118             else {
00119                 /* newter = instart; */
00120                 retval = ScanFunctions(BHEAD newpat,inter,par);
00121             }
00122             if ( retval == 0 ) {
00123                 m = AN.WildValue;
00124                 t = OldWork; r = AT.WildMask; i = nwstore;
00125                 if ( i > 0 ) {
00126                     do {
00127                         *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *r++ = *t++;
00128                     } while ( --i > 0 );
00129                 }
00130             }
00131             AT.WorkPointer = OldWork;
00132             return(retval);
00133         }
00134         else {
00135             if ( newpat >= AN.patstop ) {
00136                 if ( AN.UseFindOnly == 0 ) {
00137                     if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00138                         AN.UsedOtherFind = 1;
00139                         return(1);
00140                     }
00141                     else return(0);
00142                 }
00143                 else return(1);
00144             }
00145             /* newter = instart; */
00146             retval = ScanFunctions(BHEAD newpat,inter,par);
00147             return(retval);
00148         }
00149     }
00150     /* Now the recursion
00151     */
00152 }
00153 /*
00154 Strategy:
00155 1: match the fixed arguments
00156 2: match, permuting the wildcards if needed.
00157 3: keep track of sign.

```

```

00158 */
00159     vwc = 0;
00160     vfix = 0;
00161     ifix = 0;
00162     iwc = 0;
00163     r = pattern+FUNHEAD;
00164     while ( r < mstop ) {
00165         if ( *r < (AM.OffsetVector+WILDOFFSET) ) {
00166             fixvec[vfix++] = *r;          /* Fixed vectors */
00167             sign += vwc + ifix + iwc;
00168         }
00169         else if ( *r < MINSPEC ) {
00170             wcvec[wvc++] = *r;          /* Wildcard vectors */
00171             sign += ifix + iwc;
00172         }
00173         else if ( *r < (AM.OffsetIndex+WILDOFFSET) ) {
00174             fixind[ifix++] = *r;        /* Fixed indices */
00175             sign += iwc;
00176         }
00177         else if ( *r < (AM.OffsetIndex+(WILDOFFSET«1)) ) {
00178             wcind[iwc++] = *r;          /* Wildcard indices */
00179         }
00180         else {
00181             fixind[ifix++] = *r;        /* Generated indices ~ fixed */
00182             sign += iwc;
00183         }
00184         r++;
00185     }
00186     if ( iwc == 0 && vwc == 0 ) return(0);
00187     tvfix = tifix = 0;
00188     t = fun + FUNHEAD;
00189     m = fixvec;
00190     mstop = m + vfix;
00191     r = fixind;
00192     rstop = r + ifix;
00193     nv = 0; ni = 0;
00194     while ( t < tstop ) {
00195         if ( *t < 0 ) {
00196             nv++;
00197             if ( m < mstop && *t == *m ) {
00198                 m++;
00199             }
00200             else {
00201                 sign += WORDDIF(mstop,m);
00202                 tfixvec[tfix++] = *t;
00203             }
00204         }
00205         else {
00206             ni++;
00207             if ( r < rstop && *r == *t ) {
00208                 r++;
00209             }
00210             else {
00211                 sign += WORDDIF(rstop,r);
00212                 tfixind[tifix++] = *t;
00213             }
00214         }
00215         t++;
00216     }
00217     if ( m < mstop || r < rstop ) return(0);
00218     if ( tvfix < vwc || (tvfix+tifix) < (vwc+iwc) ) return(0);
00219     sign += ( nv - vfix - vwc ) & ni;
00220     /*
00221     Take now the wildcards that have an assignment already.
00222     See whether they match.
00223     */
00224     {
00225         WORD *wv, *wm, n;
00226         wm = AT.WildMask;
00227         wv = AN.WildValue;
00228         n = AN.NumWild;
00229         do {
00230             if ( *wm ) {
00231                 if ( *wv == VECTOVEC ) {
00232                     for ( ni = 0; ni < vwc; ni++ ) {
00233                         if ( wcvec[ni]-WILDOFFSET == wv[2] ) { /* Has been assigned */
00234                             sign += ni;
00235                             vwc--;
00236                             while ( ni < vwc ) {
00237                                 wcvec[ni] = wcvec[ni+1];
00238                                 ni++;
00239                             }
00240                         /* TryVect: */
00241                         for ( ni = 0; ni < tvfix; ni++ ) {
00242                             if ( tfixvec[ni] == wv[3] ) {
00243                                 sign += ni;
00244                                 tvfix--;

```

```

00245             while ( ni < tvfix ) {
00246                 tfixvec[ni] = tfixvec[ni+1];
00247                 ni++;
00248             }
00249             goto NextWV;
00250         }
00251     }
00252     return(0);
00253 }
00254 }
00255 }
00256 else if ( *wv == INDTOIND ) {
00257     for ( ni = 0; ni < iwc; ni++ ) {
00258         if ( wcind[ni]-WILDOFFSET == wv[2] ) { /* Has been assigned */
00259             sign += ni;
00260             iwc--;
00261             while ( ni < iwc ) {
00262                 wcind[ni] = wcind[ni+1];
00263                 ni++;
00264             }
00265             for ( ni = 0; ni < tfix; ni++ ) {
00266                 if ( tfixind[ni] == wv[3] ) {
00267                     sign += ni;
00268                     tfix--;
00269                     while ( ni < tfix ) {
00270                         tfixind[ni] = tfixind[ni+1];
00271                         ni++;
00272                     }
00273                     goto NextWV;
00274                 }
00275             }
00276             /* goto TryVect; */
00277             return(0);
00278         }
00279     }
00280 }
00281 }
00282 else if ( *wv == VECTOSUB ) {
00283     for ( ni = 0; ni < vwc; ni++ ) {
00284         if ( wcvect[ni]-WILDOFFSET == wv[2] ) return(0);
00285     }
00286 }
00287 else if ( *wv == INDTOISUB ) {
00288     for ( ni = 0; ni < iwc; ni++ ) {
00289         if ( wcind[ni]-WILDOFFSET == wv[2] ) return(0);
00290     }
00291 }
00292 }
00293 NextWV:
00294     wm++;
00295     wv += wv[1];
00296     n--;
00297     if ( n > 0 ) {
00298         while ( n > 0 && ( *wv == FROMSET || *wv == SETTONUM
00299             || *wv == LOADDOLLAR ) ) { wv += wv[1]; wm++; n--; }
00300     /*
00301         Freak problem: doesn't test for n and ran into a remaining
00302         code equal to SETTONUM followed by a big number and then
00303         ran out of the memory.
00304
00305         while ( *wv == FROMSET || *wv == SETTONUM
00306             || ( *wv == LOADDOLLAR && n > 0 ) ) { wv += wv[1]; wm++; n--; }
00307     */
00308     }
00309     } while ( n > 0 );
00310 }
00311 /*
00312     Now there are only free wildcards left.
00313     Possibly the assigned values ate too many vectors.
00314     The rest has to be done the 'hard way' via permutations.
00315     This is too bad when there are 10 indices.
00316     This could cause 10! tries.
00317     We try to avoid the worst case by using a very special
00318     (somewhat slow) permutation routine that has as its worst
00319     cases some rather unlikely configurations, rather than some
00320     common ones (as would have been the case with the conventional
00321     permutation routine).
00322     assume:
00323         vvvvvvvvvvvviiiiiii (tvfix in tfixvec and tfix in tfixind)
00324         VVVVVVVVVVIIIIIIIII (vwc in wcvect and iwc in wcind)
00325     Note: all further assignments are possible at this point!
00326     Strategy:
00327         permute v
00328         permute i
00329         loop over the ordered distribution of the leftover v's
00330         through the i's.
00331     */

```

```

00332     if ( tvfix < vwc ) { return(0); }
00333     perm1.n = tvfix;
00334     perm1.sign = 0;
00335     perm1.objects = tfixvec;
00336     perm2.n = tfix;
00337     perm2.sign = 0;
00338     perm2.objects = tfixind;
00339     distr.n1 = tvfix - vwc;
00340     distr.n2 = tfix;
00341     distr.obj1 = tfixvec + vwc;
00342     distr.obj2 = tfixind;
00343     distr.out = fixvec;          /* For scratch */
00344     first1 = 1;
00345 /*
00346         Store the current Wildcard assignments
00347 */
00348     m = AN.WildValue;
00349     t = OldWork = AT.WorkPointer;
00350     nwstore = i = (m[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
00351     r = AT.WildMask;
00352     if ( i > 0 ) {
00353         do {
00354             *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
00355         } while ( --i > 0 );
00356     }
00357     if ( t >= AT.WorkTop ) {
00358         MLOCK(ErrorMessageLock);
00359         MesWork();
00360         MUNLOCK(ErrorMessageLock);
00361         return(-1);
00362     }
00363     AT.WorkPointer = t;
00364     while ( (first1 = Permute(&perm1,first1) ) == 0 ) {
00365         first2 = 1;
00366         while ( (first2 = Permute(&perm2,first2) ) == 0 ) {
00367             first3 = 1;
00368             while ( (first3 = Distribute(&distr,first3) ) == 0 ) {
00369 /*
00370             Make now the wildcard assignments
00371 */
00372             for ( i = 0; i < vwc; i++ ) {
00373                 j = wcvec[i] - WILDOFFSET;
00374                 if ( CheckWild(BHEAD j,VECTOVEC,tfixvec[i],&newvalue) )
00375                     goto NoCaseB;
00376                 AddWild(BHEAD j,VECTOVEC,newvalue);
00377             }
00378             for ( i = 0; i < iwc; i++ ) {
00379                 j = wcind[i] - WILDOFFSET;
00380                 if ( CheckWild(BHEAD j,INDTOIND,fixvec[i],&newvalue) )
00381                     goto NoCaseB;
00382                 AddWild(BHEAD j,INDTOIND,newvalue);
00383             }
00384 /*
00385             Go into the recursion
00386 */
00387             oRepFunNum = AN.RepFunNum;
00388             AN.RepFunList[AN.RepFunNum++] = offset;
00389             AN.RepFunList[AN.RepFunNum++] =
00390                 ( perm1.sign + perm2.sign + distr.sign + sign ) & 1;
00391             newpat = pattern + pattern[1];
00392             if ( funwild ) AddWild(BHEAD *pattern-WILDOFFSET,FUNTOFUN,newfun);
00393             if ( newpat >= AN.patstop ) {
00394                 if ( AN.UseFindOnly == 0 ) {
00395                     if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00396                         AN.UsedOtherFind = 1;
00397                         return(1);
00398                     }
00399                 }
00400                 else return(1);
00401             }
00402             else {
00403 /*
00404                 newter = instart; */
00405                 if ( ScanFunctions(BHEAD newpat,inter,par) ) { return(1); }
00406             }
00407 /*
00408             Restore the old Wildcard assignments
00409 */
00410             AN.RepFunNum = oRepFunNum;
00411             m = AN.WildValue;
00412             t = OldWork; r = AT.WildMask; i = nwstore;
00413             if ( i > 0 ) {
00414                 do {
00415                     *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *r++; *r++ = *t++;
00416                 } while ( --i > 0 );
00417             }
00418             AT.WorkPointer = t;

```

```

00419     }
00420 }
00421 AT.WorkPointer = OldWork;
00422 return(0);
00423 }
00424
00425 /*
00426 #] MatchE :
00427 #[ Permute :                WORD Permute(perm,first)
00428
00429     Special permutation function.
00430     Works recursively.
00431     The aim is to cycle through in as fast a way as possible,
00432     to take care that each object hits the various positions
00433     already early in the game.
00434
00435     Start at two: -> cycle of two
00436     then three -> cycle of three
00437     etc;
00438     The innermost cycle is the longest. This is the opposite
00439     of the usual way of generating permutations and it is
00440     certainly not the fastest one. It allows for the fastest
00441     hit in the assignment of wildcards though.
00442 */
00443
00444 int Permute(PERM *perm, WORD first)
00445 {
00446     WORD *s, c, i, j;
00447     if ( first ) {
00448         perm->sign = ( perm->sign <= 1 ) ? 0: 1;
00449         for ( i = 0; i < perm->n; i++ ) perm->cycle[i] = 0;
00450         return(0);
00451     }
00452     i = perm->n;
00453     while ( --i > 0 ) {
00454         s = perm->objects;
00455         c = s[0];
00456         j = i;
00457         while ( --j >= 0 ) { *s = s[1]; s++; }
00458         *s = c;
00459         if ( ( i & 1 ) != 0 ) perm->sign ^= 1;
00460         if ( perm->cycle[i] < i ) {
00461             (perm->cycle[i])++;
00462             return(0);
00463         }
00464         else {
00465             perm->cycle[i] = 0;
00466         }
00467     }
00468     return(1);
00469 }
00470
00471 /*
00472 #] Permute :
00473 #[ PermuteP :                WORD PermuteP(perm,first)
00474
00475     Like Permute, but works on an array of pointers
00476 */
00477
00478 int PermuteP(PERMP *perm, WORD first)
00479 {
00480     WORD **s, *c, i, j;
00481     if ( first ) {
00482         perm->sign = ( perm->sign <= 1 ) ? 0: 1;
00483         for ( i = 0; i < perm->n; i++ ) perm->cycle[i] = 0;
00484         return(0);
00485     }
00486     i = perm->n;
00487     while ( --i > 0 ) {
00488         s = perm->objects;
00489         c = s[0];
00490         j = i;
00491         while ( --j >= 0 ) { *s = s[1]; s++; }
00492         *s = c;
00493         if ( ( i & 1 ) != 0 ) perm->sign ^= 1;
00494         if ( perm->cycle[i] < i ) {
00495             (perm->cycle[i])++;
00496             return(0);
00497         }
00498         else {
00499             perm->cycle[i] = 0;
00500         }
00501     }
00502     return(1);
00503 }
00504
00505 /*

```

```

00506     #] PermuteP :
00507     #[ Distribute :
00508 /*
00509
00510 int Distribute(DISTRIBUTE *d, WORD first)
00511 {
00512     WORD *to, *from, *inc, *from2, i, j;
00513     if ( first ) {
00514         d->n = d->n1 + d->n2;
00515         to = d->out;
00516         from = d->obj2;
00517         for ( i = 0; i < d->n2; i++ ) {
00518             d->cycle[i] = 0;
00519             *to++ = *from++;
00520         }
00521         from = d->obj1;
00522         while ( i < d->n ) {
00523             d->cycle[i++] = 1;
00524             *to++ = *from++;
00525         }
00526         d->sign = 0;
00527         return(0);
00528     }
00529     if ( d->n1 == 0 || d->n2 == 0 ) return(1);
00530     j = 0;
00531     i = 0;
00532     inc = d->cycle;
00533     from = inc + d->n;
00534     while ( *inc ) { j++; inc++; }
00535     while ( inc < from && !*inc ) { i++; inc++; }
00536     if ( inc >= from ) return(1);
00537     d->sign ^= ((i&j)-j+1) & 1;
00538     *inc = 0;
00539     *--inc = 1;
00540     while ( --j >= 0 ) *--inc = 1;
00541     while ( --i > 0 ) *--inc = 0;
00542     to = d->out;
00543     from = d->obj1;
00544     from2 = d->obj2;
00545     for ( i = 0; i < d->n; i++ ) {
00546         if ( *inc++ ) {
00547             *to++ = *from++;
00548         }
00549         else {
00550             *to++ = *from2++;
00551         }
00552     }
00553     return(0);
00554 }
00555 /*
00556 #] Distribute :
00557 #[ MatchCy :
00558
00559     Matching of (r)cyclic tensors.
00560     Parameters like in MatchE.
00561     The structure of the routine is much simpler, because the number
00562     of possibilities is much more limited.
00563     The major complication is the ?a-type wildcards
00564     We need a strategy for T(i1?,?a,i1?,?b). Which is the shorter
00565     match: ?a or ?b ? (if possible of course)
00566     This is also relevant in the case of the shortest match if there
00567     is more than one choice for i1.
00568 /*
00569
00570
00571 int MatchCy(PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
00572 {
00573     GETBIDENTITY
00574     WORD *t, *tstop, *p, *pstop, *m, *r, *oldworkpointer = AT.WorkPointer;
00575     WORD *thewildcards, *multiplicity, *renum, wc, newvalue, oldwilval = 0;
00576     WORD *params, *lowlevel = 0;
00577     int argcount = 0, funnycount = 0, tcount = fun[1] - FUNHEAD;
00578     int type = 0, pnum, i, j, k, nwstore, iraise, itop, sumeat;
00579     CBUF *C = cbuf+AT.ebufnum;
00580     int ntw = 3*AN.NumTotWildArgs+1;
00581     LONG oldcpointer = C->Pointer - C->Buffer;
00582     WORD offset = fun-AN.terstart, *newpat;
00583
00584     if ( (functions[fun[0]-FUNCTION].symmetric & ~REVERSEORDER) == RCYCLESYMMETRIC ) type = 1;
00585     pnum = pattern[0];
00586     nwstore = (AN.WildValue[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
00587     if ( pnum > FUNCTION + WILDOFFSET ) {
00588         pnum -= WILDOFFSET;
00589         if ( CheckWild(BHEAD pnum,FUNTOFUN,fun[0],&newvalue) ) return(0);
00590         oldwilval = 1;
00591         t = lowlevel = AT.WorkPointer;
00592         m = AN.WildValue;

```

```

00593     i = nwstore;
00594     r = AT.WildMask;
00595     if ( i > 0 ) {
00596         do {
00597             *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
00598         } while ( --i > 0 );
00599     }
00600     *t++ = C->numrhs;
00601     if ( t >= AT.WorkTop ) {
00602         MLOCK(ErrorMessageLock);
00603         MesWork();
00604         MUNLOCK(ErrorMessageLock);
00605         return(-1);
00606     }
00607     AT.WorkPointer = t;
00608     AddWild(BHEAD pnum,FUNTOFUN,newvalue);
00609 }
00610 if ( (functions[pnum-FUNCTION].symmetric & ~REVERSEORDER) == RCYCLESYMMETRIC ) type = 1;
00611
00612 /* First we have to make an inventory. Are there FUNNYWILD pointers? */
00613
00614 p = pattern + FUNHEAD;
00615 pstop = pattern + pattern[1];
00616 while ( p < pstop ) {
00617     if ( *p == FUNNYWILD ) { p += 2; funnycount++; }
00618     else { p++; argcount++; }
00619 }
00620 if ( argcount > tcount ) goto NoSuccess;
00621 if ( argcount < tcount && funnycount == 0 ) goto NoSuccess;
00622 if ( argcount == 0 && tcount == 0 && funnycount == 0 ) {
00623     AN.RepFunList[AN.RepFunNum++] = offset;
00624     AN.RepFunList[AN.RepFunNum++] = 0;
00625     newpat = pattern + pattern[1];
00626     if ( newpat >= AN.patstop ) {
00627         if ( AN.UseFindOnly == 0 ) {
00628             if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00629                 AT.WorkPointer = oldworkpointer;
00630                 AN.UsedOtherFind = 1;
00631                 return(1);
00632             }
00633             j = 0;
00634         }
00635         else {
00636             AT.WorkPointer = oldworkpointer;
00637             return(1);
00638         }
00639     }
00640     else j = ScanFunctions(BHEAD newpat,inter,par);
00641     if ( j ) return(j);
00642     goto NoSuccess;
00643 }
00644 tstop = fun + fun[1];
00645
00646 /* Store the wildcard assignments */
00647
00648 params = AT.WorkPointer;
00649 thewildcards = t = params + tcount;
00650 t += ntw;
00651 if ( oldwilval ) lowlevel = oldworkpointer;
00652 else lowlevel = t;
00653 m = AN.WildValue;
00654 i = nwstore;
00655 if ( i > 0 ) {
00656     r = AT.WildMask;
00657     do {
00658         *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
00659     } while ( --i > 0 );
00660     *t++ = C->numrhs;
00661 }
00662 if ( t >= AT.WorkTop ) {
00663     MLOCK(ErrorMessageLock);
00664     MesWork();
00665     MUNLOCK(ErrorMessageLock);
00666     return(-1);
00667 }
00668 AT.WorkPointer = t;
00669 /*
00670 #[ Case 1: no funnies or all funnies must be empty. We just cycle through.
00671 */
00672 if ( argcount == tcount ) {
00673     if ( funnycount > 0 ) { /* Test all funnies first */
00674         p = pattern + FUNHEAD;
00675         t = fun + FUNHEAD;
00676         while ( p < pstop ) {
00677             if ( *p != FUNNYWILD ) { p++; continue; }
00678             AN.argaddress = t;
00679             if ( CheckWild(BHEAD p[1],ARGTOARG,0,t) ) goto nomatch;

```



```

00680         AddWild(BHEAD p[1],ARGTOARG,0);
00681         p += 2;
00682     }
00683     oldwilval = 1;
00684 }
00685 for ( k = 0; k <= type; k++ ) {
00686     if ( k == 0 ) {
00687         p = params; t = fun + FUNHEAD;
00688         while ( t < tstop ) *p++ = *t++;
00689     }
00690     else {
00691         p = params+tcount; t = fun + FUNHEAD;
00692         while ( t < tstop ) *--p = *t++;
00693     }
00694     for ( i = 0; i < tcount; i++ ) { /* The various cycles */
00695         p = pattern + FUNHEAD;
00696         wc = 0;
00697         for ( j = 0; j < tcount; j++, p++ ) { /* The arguments */
00698             while ( *p == FUNNYWILD ) p += 2;
00699             t = params + (i+j)%tcount;
00700             if ( *t == *p ) continue;
00701             if ( *p >= AM.OffsetIndex + WILDOFFSET
00702                 && *p < AM.OffsetIndex + 2*WILDOFFSET ) {
00703
00704                 /* Test wildcard index */
00705
00706                 wc = *p - WILDOFFSET;
00707                 if ( CheckWild(BHEAD wc,INDTOIND,*t,&newvalue) ) break;
00708                 AddWild(BHEAD wc,INDTOIND,newvalue);
00709             }
00710             else if ( *t < MINSPEC && p[j] < MINSPEC
00711                 && *p >= AM.OffsetVector + WILDOFFSET ) {
00712
00713                 /* Test wildcard vector */
00714
00715                 wc = *p - WILDOFFSET;
00716                 if ( CheckWild(BHEAD wc,VECTOVEC,*t,&newvalue) ) break;
00717                 AddWild(BHEAD wc,VECTOVEC,newvalue);
00718             }
00719             else break;
00720         }
00721         if ( j >= tcount ) { /* Match! */
00722
00723             /* Continue with other functions. Make sure of the funnies */
00724
00725             AN.RepFunList[AN.RepFunNum++] = offset;
00726             AN.RepFunList[AN.RepFunNum++] = 0;
00727
00728             if ( funnycount > 0 ) {
00729                 p = pattern + FUNHEAD;
00730                 t = fun + FUNHEAD;
00731                 while ( p < pstop ) {
00732                     if ( *p != FUNNYWILD ) { p++; continue; }
00733                     AN.argaddress = t;
00734                     AddWild(BHEAD p[1],ARGTOARG,0);
00735                     p += 2;
00736                 }
00737             }
00738             newpat = pattern + pattern[1];
00739             if ( newpat >= AN.patstop ) {
00740                 if ( AN.UseFindOnly == 0 ) {
00741                     if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00742                         AT.WorkPointer = oldworkpointer;
00743                         AN.UsedOtherFind = 1;
00744                         return(1);
00745                     }
00746                     j = 0;
00747                 }
00748                 else {
00749                     AT.WorkPointer = oldworkpointer;
00750                     return(1);
00751                 }
00752             }
00753             else j = ScanFunctions(BHEAD newpat,inter,par);
00754             if ( j ) {
00755                 AT.WorkPointer = oldworkpointer;
00756                 return(j); /* Full match. Return our success */
00757             }
00758             AN.RepFunNum -= 2;
00759         }
00760
00761         /* No (deeper) match. -> reset wildcards and continue */
00762
00763         if ( wc && nwstore > 0 ) {
00764             j = nwstore;
00765             m = AN.WildValue;
00766             t = thewildcards + ntwa; r = AT.WildMask;

```

```

00767         if ( j > 0 ) {
00768             do {
00769                 *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
00770             } while ( --j > 0 );
00771         }
00772         C->numrhs = *t++;
00773         C->Pointer = C->Buffer + oldcpointer;
00774     }
00775 }
00776 }
00777 goto NoSuccess;
00778 }
00779 /*
00780 #] Case 1:
00781 #[ Case 2: One FUNNYWILD. Fix its length.
00782 */
00783 if ( funnycount == 1 ) {
00784     funnycount = tcount - argcount; /* Number of arguments to be eaten */
00785     for ( k = 0; k <= type; k++ ) {
00786         if ( k == 0 ) {
00787             p = params; t = fun + FUNHEAD;
00788             while ( t < tstop ) *p++ = *t++;
00789         }
00790         else {
00791             p = params+tcount; t = fun + FUNHEAD;
00792             while ( t < tstop ) *--p = *t++;
00793         }
00794         for ( i = 0; i < tcount; i++ ) { /* The various cycles */
00795             p = pattern + FUNHEAD;
00796             t = params;
00797             wc = 0;
00798             for ( j = 0; j < tcount; j++, p++, t++ ) { /* The arguments */
00799                 if ( *t == *p ) continue;
00800                 if ( *p == FUNNYWILD ) {
00801                     p++; wc = 1;
00802                     AN.argaddress = t;
00803                     if ( CheckWild(BHEAD *p,ARGTOARG|EATTENSOR,funnycount,t) ) break;
00804                     AddWild(BHEAD *p,ARGTOARG|EATTENSOR,funnycount);
00805                     j += funnycount-1; t += funnycount-1;
00806                 }
00807                 else if ( *p >= AM.OffsetIndex + WILDOFFSET
00808                     && *p < AM.OffsetIndex + 2*WILDOFFSET ) {
00809
00810                     /* Test wildcard index */
00811
00812                     wc = *p - WILDOFFSET;
00813                     if ( CheckWild(BHEAD wc,INDTOIND,*t,&newvalue) ) break;
00814                     AddWild(BHEAD wc,INDTOIND,newvalue);
00815                 }
00816                 else if ( *t < MINSPEC && *p < MINSPEC
00817                     && *p >= AM.OffsetVector + WILDOFFSET ) {
00818
00819                     /* Test wildcard vector */
00820
00821                     wc = *p - WILDOFFSET;
00822                     if ( CheckWild(BHEAD wc,VECTOVEC,*t,&newvalue) ) break;
00823                     AddWild(BHEAD wc,VECTOVEC,newvalue);
00824                 }
00825                 else break;
00826             }
00827             if ( j >= tcount ) { /* Match! */
00828
00829                 /* Continue with other functions. Make sure of the funnies */
00830
00831                 AN.RepFunList[AN.RepFunNum++] = offset;
00832                 AN.RepFunList[AN.RepFunNum++] = 0;
00833                 newpat = pattern + pattern[1];
00834                 if ( newpat >= AN.patstop ) {
00835                     if ( AN.UseFindOnly == 0 ) {
00836                         if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00837                             AT.WorkPointer = oldworkpointer;
00838                             AN.UsedOtherFind = 1;
00839                             return(1);
00840                         }
00841                         j = 0;
00842                     }
00843                     else {
00844                         AT.WorkPointer = oldworkpointer;
00845                         return(1);
00846                     }
00847                 }
00848                 else j = ScanFunctions(BHEAD newpat,inter,par);
00849                 if ( j ) {
00850                     AT.WorkPointer = oldworkpointer;
00851                     return(j); /* Full match. Return our success */
00852                 }
00853                 AN.RepFunNum -= 2;

```

```

00854         }
00855
00856         /* No (deeper) match. -> reset wildcards and continue */
00857
00858         if ( wc ) {
00859             j = nwstore;
00860             m = AN.WildValue;
00861             t = thewildcards + ntw; r = AT.WildMask;
00862             if ( j > 0 ) {
00863                 do {
00864                     *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
00865                 } while ( --j > 0 );
00866             }
00867             C->numrhs = *t++;
00868             C->Pointer = C->Buffer + oldcpointer;
00869         }
00870         t = params;
00871         wc = *t;
00872         for ( j = 1; j < tcount; j++ ) { *t = t[1]; t++; }
00873         *t = wc;
00874     }
00875 }
00876 goto NoSuccess;
00877 }
00878 /*
00879 #] Case 2:
00880 #[ Case 3: More than one FUNNYWILD. Complicated.
00881 */
00882
00883 sumeat = tcount - argcount; /* Total number to be eaten by Funnies */
00884 /*
00885 In the first funnycount elements of 'thewildcards' we arrange
00886 for the summing over the various possibilities.
00887 The renumbering table is in thewildcards[2*funnycount]
00888 The multiplicity table is in thewildcards[funnycount]
00889 The number of arguments for each is in thewildcards[]
00890 */
00891 p = pattern+FUNHEAD;
00892 for ( i = funnycount; i < ntw; i++ ) thewildcards[i] = -1;
00893 multiplicity = thewildcards + funnycount;
00894 renum = multiplicity + funnycount;
00895 j = 0;
00896 while ( p < pstop ) {
00897     if ( *p != FUNNYWILD ) { p++; continue; }
00898     p++;
00899     if ( renum[*p] < 0 ) {
00900         renum[*p] = j;
00901         multiplicity[j] = 1;
00902         j++;
00903     }
00904     else multiplicity[renum[*p]]++;
00905     p++;
00906 }
00907 /*
00908 Strategy: First 'declared' has a tendency to be smaller
00909 */
00910 for ( i = 1; i < AN.NumTotWildArgs; i++ ) {
00911     if ( renum[i] < 0 ) continue;
00912     for ( j = i+1; j <= AN.NumTotWildArgs; j++ ) {
00913         if ( renum[j] < 0 ) continue;
00914         if ( renum[i] < renum[j] ) continue;
00915         k = multiplicity[renum[i]];
00916         multiplicity[renum[i]] = multiplicity[renum[j]];
00917         multiplicity[renum[j]] = k;
00918         k = renum[i]; renum[i] = renum[j]; renum[j] = k;
00919     }
00920 }
00921 for ( i = 0; i < funnycount; i++ ) thewildcards[i] = 0;
00922 iraise = funnycount-1;
00923 for ( ; ) {
00924     for ( i = 0, j = sumeat; i < iraise; i++ )
00925         j -= thewildcards[i]*multiplicity[i];
00926     if ( j < 0 || j % multiplicity[iraise] != 0 ) {
00927         if ( j > 0 ) {
00928             thewildcards[iraise-1]++;
00929             continue;
00930         }
00931         itop = iraise-1;
00932         while ( itop > 0 && j < 0 ) {
00933             j += thewildcards[itop]*multiplicity[itop];
00934             thewildcards[itop] = 0;
00935             itop--;
00936         }
00937         if ( itop <= 0 && j <= 0 ) break;
00938         thewildcards[itop]++;
00939         continue;
00940     }
}

```

```

00941     thewildcards[iraise] = j / multiplicity[iraise];
00942
00943     for ( k = 0; k <= type; k++ ) {
00944         if ( k == 0 ) {
00945             p = params; t = fun + FUNHEAD;
00946             while ( t < tstop ) *p++ = *t++;
00947         }
00948         else {
00949             p = params+tcount; t = fun + FUNHEAD;
00950             while ( t < tstop ) *--p = *t++;
00951         }
00952         for ( i = 0; i < tcount; i++ ) { /* The various cycles */
00953             p = pattern + FUNHEAD;
00954             t = params;
00955             wc = 0;
00956             for ( j = 0; j < tcount; j++, p++, t++ ) { /* The arguments */
00957                 if ( *t == *p ) continue;
00958                 if ( *p == FUNNYWILD ) {
00959                     p++; wc = thewildcards[renum[*p]];
00960                     AN.argaddress = t;
00961                     if ( CheckWild(BHEAD *p,ARGTOARG|EATTENSOR,wc,t) ) break;
00962                     AddWild(BHEAD *p,ARGTOARG|EATTENSOR,wc);
00963                     j += wc-1; t += wc-1; wc = 1;
00964                 }
00965                 else if ( *p >= AM.OffsetIndex + WILDOFFSET
00966                     && *p < AM.OffsetIndex + 2*WILDOFFSET ) {
00967
00968                     /* Test wildcard index */
00969
00970                     wc = *p - WILDOFFSET;
00971                     if ( CheckWild(BHEAD wc,INDTOIND,*t,&newvalue) ) break;
00972                     AddWild(BHEAD wc,INDTOIND,newvalue);
00973                 }
00974                 else if ( *t < MINSPEC && *p < MINSPEC
00975                     && *p >= AM.OffsetVector + WILDOFFSET ) {
00976
00977                     /* Test wildcard vector */
00978
00979                     wc = *p - WILDOFFSET;
00980                     if ( CheckWild(BHEAD wc,VECTOVEC,*t,&newvalue) ) break;
00981                     AddWild(BHEAD wc,VECTOVEC,newvalue);
00982                 }
00983                 else break;
00984             }
00985             if ( j >= tcount ) { /* Match! */
00986
00987                 /* Continue with other functions. Make sure of the funnies */
00988
00989                 AN.RepFunList[AN.RepFunNum++] = offset;
00990                 AN.RepFunList[AN.RepFunNum++] = 0;
00991                 newpat = pattern + pattern[1];
00992                 if ( newpat >= AN.patstop ) {
00993                     if ( AN.UseFindOnly == 0 ) {
00994                         if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
00995                             AT.WorkPointer = oldworkpointer;
00996                             AN.UsedOtherFind = 1;
00997                             return(1);
00998                         }
00999                         j = 0;
01000                     }
01001                     else {
01002                         AT.WorkPointer = oldworkpointer;
01003                         return(1);
01004                     }
01005                 }
01006                 else j = ScanFunctions(BHEAD newpat,inter,par);
01007                 if ( j ) {
01008                     AT.WorkPointer = oldworkpointer;
01009                     return(j); /* Full match. Return our success */
01010                 }
01011                 AN.RepFunNum -= 2;
01012             }
01013
01014             /* No (deeper) match. -> reset wildcards and continue */
01015
01016             if ( wc ) {
01017                 j = nwstore;
01018                 m = AN.WildValue;
01019                 t = thewildcards + ntwa; r = AT.WildMask;
01020                 if ( j > 0 ) {
01021                     do {
01022                         *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01023                     } while ( --j > 0 );
01024                 }
01025                 C->numrhs = *t++;
01026                 C->Pointer = C->Buffer + oldcpointer;
01027             }

```

```

01028         t = params;
01029         wc = *t;
01030         for ( j = 1; j < tcount; j++ ) { *t = t[1]; t++; }
01031         *t = wc;
01032     }
01033 }
01034 (thewildcards[iraise-1])++;
01035 }
01036 /*
01037 #] Case 3:
01038 */
01039 NoSuccess:
01040 if ( oldwilval > 0 ) {
01041 nomatch:;
01042     j = nwstore;
01043     if ( j > 0 ) {
01044         m = AN.WildValue;
01045         t = lowlevel; r = AT.WildMask;
01046         if ( j > 0 ) {
01047             do {
01048                 *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01049             } while ( --j > 0 );
01050         }
01051         C->numrhs = *t++;
01052         C->Pointer = C->Buffer + oldcpointer;
01053     }
01054 }
01055 AT.WorkPointer = oldworkpointer;
01056 return(0);
01057 }
01058
01059 /*
01060 #] MatchCy :
01061 #[ FunMatchCy :
01062
01063     Matching of (r)cyclic functions.
01064     Like MatchCy, but now for general functions.
01065 */
01066
01067 int FunMatchCy(PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
01068 {
01069     GETBIDENTITY
01070     WORD *t, *tstop, *p, *pstop, *m, *r, *oldworkpointer = AT.WorkPointer;
01071     WORD **a, *thewildcards, *multiplicity, *renum, wc, wcc, oldwilval = 0;
01072     LONG ow = AT.pWorkPointer;
01073     WORD newvalue, *lowlevel = 0;
01074     int argcount = 0, funnycount = 0, tcount = 0;
01075     int type = 0, pn timer, i, j, k, nwstore, iraise, itop, sumeat;
01076     CBUF *C = cbuf+AT.ebufnum;
01077     int ntw = 3*AN.NumTotWildArgs+1;
01078     LONG oldcpointer = C->Pointer - C->Buffer;
01079     WORD offset = fun-AN.terstart, *newpat;
01080
01081     if ( (functions[fun[0]-FUNCTION].symmetric & ~REVERSEORDER) == RCYCLESYMMETRIC ) type = 1;
01082     pn timer = pattern[0];
01083     nwstore = (AN.WildValue[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
01084     if ( pn timer > FUNCTION + WILDOFFSET ) {
01085         pn timer -= WILDOFFSET;
01086         if ( CheckWild(BHEAD pn timer,FUNTOFUN,fun[0],&newvalue) ) return(0);
01087         oldwilval = 1;
01088         t = lowlevel = oldworkpointer;
01089         m = AN.WildValue;
01090         i = nwstore;
01091         r = AT.WildMask;
01092         if ( i > 0 ) {
01093             do {
01094                 *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
01095             } while ( --i > 0 );
01096         }
01097         *t++ = C->numrhs;
01098         if ( t >= AT.WorkTop ) {
01099             MLOCK(ErrorMessageLock);
01100             MesWork();
01101             MUNLOCK(ErrorMessageLock);
01102             return(-1);
01103         }
01104         AT.WorkPointer = t;
01105         AddWild(BHEAD pn timer,FUNTOFUN,newvalue);
01106     }
01107     if ( (functions[pn timer-FUNCTION].symmetric & ~REVERSEORDER) == RCYCLESYMMETRIC ) type = 1;
01108
01109     /* First we have to make an inventory. Are there -ARGWILD pointers? */
01110
01111     p = pattern + FUNHEAD;
01112     pstop = pattern + pattern[1];
01113     while ( p < pstop ) {
01114         if ( *p == -ARGWILD ) { p += 2; funnycount++; }

```

```

01115         else { NEXTARG(p); argcount++; }
01116     }
01117     t = fun + FUNHEAD;
01118     tstop = fun + fun[1];
01119     while ( t < tstop ) { NEXTARG(t); tcount++; }
01120
01121     if ( argcount > tcount ) return(0);
01122     if ( argcount < tcount && funnycount == 0 ) return(0);
01123     if ( argcount == 0 && tcount == 0 && funnycount == 0 ) {
01124         AN.RepFunList[AN.RepFunNum++] = offset;
01125         AN.RepFunList[AN.RepFunNum++] = 0;
01126         newpat = pattern + pattern[1];
01127         if ( newpat >= AN.patstop ) {
01128             if ( AN.UseFindOnly == 0 ) {
01129                 if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01130                     AT.WorkPointer = oldworkpointer;
01131                     AN.UsedOtherFind = 1;
01132                     return(1);
01133                 }
01134                 j = 0;
01135             }
01136             else {
01137                 AT.WorkPointer = oldworkpointer;
01138                 return(1);
01139             }
01140         }
01141         else j = ScanFunctions(BHEAD newpat,inter,par);
01142         if ( j ) return(j);
01143         goto NoSuccess;
01144     }
01145
01146     /* Store the wildcard assignments */
01147
01148     WantAddPointers(tcount);
01149     AT.pWorkPointer += tcount;
01150     thewildcards = t = AT.WorkPointer;
01151     t += ntw;
01152     if ( oldwilval ) lowlevel = oldworkpointer;
01153     else lowlevel = t;
01154     m = AN.WildValue;
01155     i = nwstore;
01156     if ( i > 0 ) {
01157         r = AT.WildMask;
01158         do {
01159             *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
01160         } while ( --i > 0 );
01161         *t++ = C->numrhs;
01162     }
01163     if ( t >= AT.WorkTop ) {
01164         MLOCK(ErrorMessageLock);
01165         MesWork();
01166         MUNLOCK(ErrorMessageLock);
01167         return(-1);
01168     }
01169     AT.WorkPointer = t;
01170
01171     /*
01172     #[ Case 1: no funnies or all funnies must be empty. We just cycle through.
01173     */
01174     if ( argcount == tcount ) {
01175         if ( funnycount > 0 ) { /* Test all funnies first */
01176             p = pattern + FUNHEAD;
01177             t = fun + FUNHEAD;
01178             while ( p < pstop ) {
01179                 if ( *p != -ARGWILD ) { p++; continue; }
01180                 AN.argaddress = t;
01181                 if ( CheckWild(BHEAD p[1],ARGTOARG,0,t) ) goto nomatch;
01182                 AddWild(BHEAD p[1],ARGTOARG,0);
01183                 p += 2;
01184             }
01185             oldwilval = 1;
01186         }
01187         for ( k = 0; k <= type; k++ ) {
01188             if ( k == 0 ) {
01189                 a = AT.pWorkSpace+oww; t = fun + FUNHEAD;
01190                 while ( t < tstop ) { *a++ = t; NEXTARG(t); }
01191             }
01192             else {
01193                 a = AT.pWorkSpace+oww+tcount; t = fun + FUNHEAD;
01194                 while ( t < tstop ) { *--a = t; NEXTARG(t); }
01195             }
01196             for ( i = 0; i < tcount; i++ ) { /* The various cycles */
01197                 p = pattern + FUNHEAD;
01198                 wc = 0;
01199                 for ( j = 0; j < tcount; j++ ) { /* The arguments */
01200                     while ( *p == -ARGWILD ) p += 2;
01201                     t = AT.pWorkSpace[oww+((i+j)%tcount)];
01202                     if ( ( wcc = MatchArgument(BHEAD t,p) ) == 0 ) break;

```

```

01202         if ( wcc > 1 ) wc = 1;
01203         NEXTARG(p);
01204     }
01205     if ( j >= tcount ) { /* Match! */
01206
01207         /* Continue with other functions. Make sure of the funnies */
01208
01209         AN.RepFunList[AN.RepFunNum++] = offset;
01210         AN.RepFunList[AN.RepFunNum++] = 0;
01211
01212         if ( funnycount > 0 ) {
01213             p = pattern + FUNHEAD;
01214             t = fun + FUNHEAD;
01215             while ( p < pstop ) {
01216                 if ( *p != -ARGWILD ) { p++; continue; }
01217                 AN.argaddress = t;
01218                 AddWild(BHEAD p[1],ARGTOARG,0);
01219                 p += 2;
01220             }
01221         }
01222         newpat = pattern + pattern[1];
01223         if ( newpat >= AN.patstop ) {
01224             if ( AN.UseFindOnly == 0 ) {
01225                 if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01226                     AT.WorkPointer = oldworkpointer;
01227                     AT.pWorkPointer = oww;
01228                     AN.UsedOtherFind = 1;
01229                     return(1);
01230                 }
01231                 j = 0;
01232             }
01233             else {
01234                 AT.WorkPointer = oldworkpointer;
01235                 AT.pWorkPointer = oww;
01236                 return(1);
01237             }
01238         }
01239         else j = ScanFunctions(BHEAD newpat,inter,par);
01240         if ( j ) {
01241             AT.WorkPointer = oldworkpointer;
01242             AT.pWorkPointer = oww;
01243             return(j); /* Full match. Return our success */
01244         }
01245         AN.RepFunNum -= 2;
01246     }
01247
01248     /* No (deeper) match. -> reset wildcards and continue */
01249
01250     if ( wc && nwstore > 0 ) {
01251         j = nwstore;
01252         m = AN.WildValue;
01253         t = thewildcards + ntwa; r = AT.WildMask;
01254         if ( j > 0 ) {
01255             do {
01256                 *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01257             } while ( --j > 0 );
01258         }
01259         C->numrhs = *t++;
01260         C->Pointer = C->Buffer + oldcpointer;
01261     }
01262 }
01263 }
01264 goto NoSuccess;
01265 }
01266 /*
01267 #] Case 1:
01268 #[ Case 2: One -ARGWILD. Fix its length.
01269 */
01270 if ( funnycount == 1 ) {
01271     funnycount = tcount - argcount; /* Number or arguments to be eaten */
01272     for ( k = 0; k <= type; k++ ) {
01273         if ( k == 0 ) {
01274             a = AT.pWorkSpace+oww; t = fun + FUNHEAD;
01275             while ( t < tstop ) { *a++ = t; NEXTARG(t); }
01276         }
01277         else {
01278             a = AT.pWorkSpace+oww+tcount; t = fun + FUNHEAD;
01279             while ( t < tstop ) { *--a = t; NEXTARG(t); }
01280         }
01281     }
01282     for ( i = 0; i < tcount; i++ ) { /* The various cycles */
01283         p = pattern + FUNHEAD;
01284         a = AT.pWorkSpace+oww;
01285         wc = 0;
01286         for ( j = 0; j < tcount; j++, a++ ) { /* The arguments */
01287             t = *a;
01288             if ( *p == -ARGWILD ) {
01289                 wc = 1;

```

```

01289         AN.argaddress = (WORD *)a;
01290         if ( CheckWild(BHEAD p[1],ARLTOARL,funnycount,(WORD *)a) ) break;
01291         AddWild(BHEAD p[1],ARLTOARL,funnycount);
01292         j += funnycount-1; a += funnycount-1;
01293     }
01294     else if ( MatchArgument(BHEAD t,p) == 0 ) break;
01295     NEXTARG(p);
01296 }
01297 if ( j >= tcount ) { /* Match! */
01298
01299     /* Continue with other functions. Make sure of the funnies */
01300
01301     AN.RepFunList[AN.RepFunNum++] = offset;
01302     AN.RepFunList[AN.RepFunNum++] = 0;
01303     newpat = pattern + pattern[1];
01304     if ( newpat >= AN.patstop ) {
01305         if ( AN.UseFindOnly == 0 ) {
01306             if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01307                 AT.WorkPointer = oldworkpointer;
01308                 AT.pWorkPointer = ow;
01309                 AN.UsedOtherFind = 1;
01310                 return(1);
01311             }
01312             j = 0;
01313         }
01314         else {
01315             AT.WorkPointer = oldworkpointer;
01316             AT.pWorkPointer = ow;
01317             return(1);
01318         }
01319     }
01320     else j = ScanFunctions(BHEAD newpat,inter,par);
01321     if ( j ) {
01322         AT.WorkPointer = oldworkpointer;
01323         AT.pWorkPointer = ow;
01324         return(j); /* Full match. Return our success */
01325     }
01326     AN.RepFunNum -= 2;
01327 }
01328
01329 /* No (deeper) match. -> reset wildcards and continue */
01330
01331 if ( wc ) {
01332     j = nwstore;
01333     m = AN.WildValue;
01334     t = thewildcards + ntw; r = AT.WildMask;
01335     if ( j > 0 ) {
01336         do {
01337             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01338         } while ( --j > 0 );
01339     }
01340     C->numrhs = *t++;
01341     C->Pointer = C->Buffer + oldcpointer;
01342 }
01343 a = AT.pWorkSpace+ow;
01344 t = *a;
01345 for ( j = 1; j < tcount; j++ ) { *a = a[1]; a++; }
01346 *a = t;
01347 }
01348 }
01349 goto NoSuccess;
01350 }
01351 /*
01352 #] Case 2:
01353 #[ Case 3: More than one -ARGWILD. Complicated.
01354 */
01355
01356 sumeat = tcount - argcount; /* Total number to be eaten by Funnies */
01357 /*
01358 In the first funnycount elements of 'thewildcards' we arrange
01359 for the summing over the various possibilities.
01360 The renumbering table is in thewildcards[2*funnycount]
01361 The multiplicity table is in thewildcards[funnycount]
01362 The number of arguments for each is in thewildcards[]
01363 */
01364 p = pattern+FUNHEAD;
01365 for ( i = funnycount; i < ntw; i++ ) thewildcards[i] = -1;
01366 multiplicity = thewildcards + funnycount;
01367 renum = multiplicity + funnycount;
01368 j = 0;
01369 while ( p < pstop ) {
01370     if ( *p != -ARGWILD ) { p++; continue; }
01371     p++;
01372     if ( renum[*p] < 0 ) {
01373         renum[*p] = j;
01374         multiplicity[j] = 1;
01375         j++;

```



```

01376     }
01377     else multiplicity[renum[*p]]++;
01378     p++;
01379 }
01380 /*
01381 Strategy: First 'declared' has a tendency to be smaller
01382 */
01383 for ( i = 1; i < AN.NumTotWildArgs; i++ ) {
01384     if ( renum[i] < 0 ) continue;
01385     for ( j = i+1; j <= AN.NumTotWildArgs; j++ ) {
01386         if ( renum[j] < 0 ) continue;
01387         if ( renum[i] < renum[j] ) continue;
01388         k = multiplicity[renum[i]];
01389         multiplicity[renum[i]] = multiplicity[renum[j]];
01390         multiplicity[renum[j]] = k;
01391         k = renum[i]; renum[i] = renum[j]; renum[j] = k;
01392     }
01393 }
01394 for ( i = 0; i < funnycount; i++ ) thewildcards[i] = 0;
01395 iraise = funnycount-1;
01396 for ( ;; ) {
01397     for ( i = 0, j = sumeat; i < iraise; i++ )
01398         j -= thewildcards[i]*multiplicity[i];
01399     if ( j < 0 || j % multiplicity[iraise] != 0 ) {
01400         if ( j > 0 ) {
01401             thewildcards[iraise-1]++;
01402             continue;
01403         }
01404         itop = iraise-1;
01405         while ( itop > 0 && j < 0 ) {
01406             j += thewildcards[itop]*multiplicity[itop];
01407             thewildcards[itop] = 0;
01408             itop--;
01409         }
01410         if ( itop <= 0 && j <= 0 ) break;
01411         thewildcards[itop]++;
01412         continue;
01413     }
01414     thewildcards[iraise] = j / multiplicity[iraise];
01415
01416     for ( k = 0; k <= type; k++ ) {
01417         if ( k == 0 ) {
01418             a = AT.pWorkSpace+oww; t = fun + FUNHEAD;
01419             while ( t < tstop ) { *a++ = t; NEXTARG(t); }
01420         }
01421         else {
01422             a = AT.pWorkSpace+oww+tcount; t = fun + FUNHEAD;
01423             while ( t < tstop ) { *--a = t; NEXTARG(t); }
01424         }
01425         for ( i = 0; i < tcount; i++ ) { /* The various cycles */
01426             p = pattern + FUNHEAD;
01427             a = AT.pWorkSpace+oww;
01428             wc = 0;
01429             for ( j = 0; j < tcount; j++, a++ ) { /* The arguments */
01430                 t = *a;
01431                 if ( *p == -ARGWILD ) {
01432                     wc = thewildcards[renum[p[1]]];
01433                     AN.argaddress = (WORD *)a;
01434                     if ( CheckWild(BHEAD p[1],ARLTOARL,wc,(WORD *)a) ) break;
01435                     AddWild(BHEAD p[1],ARLTOARL,wc);
01436                     j += wc-1; a += wc-1; wc = 1;
01437                 }
01438                 else if ( MatchArgument(BHEAD t,p) == 0 ) break;
01439                 NEXTARG(p);
01440             }
01441             if ( j >= tcount ) { /* Match! */
01442
01443                 /* Continue with other functions. Make sure of the funnies */
01444
01445                 AN.RepFunList[AN.RepFunNum++] = offset;
01446                 AN.RepFunList[AN.RepFunNum++] = 0;
01447                 newpat = pattern + pattern[1];
01448                 if ( newpat >= AN.patstop ) {
01449                     if ( AN.UseFindOnly == 0 ) {
01450                         if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01451                             AT.WorkPointer = oldworkpointer;
01452                             AT.pWorkPointer = oww;
01453                             AN.UsedOtherFind = 1;
01454                             return(1);
01455                         }
01456                         j = 0;
01457                     }
01458                     else {
01459                         AT.WorkPointer = oldworkpointer;
01460                         AT.pWorkPointer = oww;
01461                         return(1);
01462                     }
01463                 }
01464             }
01465         }
01466     }

```

```

01463     }
01464     else j = ScanFunctions(BHEAD newpat,inter,par);
01465     if ( j ) {
01466         AT.WorkPointer = oldworkpointer;
01467         AT.pWorkPointer = oww;
01468         return(j); /* Full match. Return our success */
01469     }
01470     AN.RepFunNum -= 2;
01471 }
01472
01473 /* No (deeper) match. -> reset wildcards and continue */
01474
01475 if ( wc ) {
01476     j = nwstore;
01477     m = AN.WildValue;
01478     t = thewildcards + ntwa; r = AT.WildMask;
01479     if ( j > 0 ) {
01480         do {
01481             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01482         } while ( --j > 0 );
01483     }
01484     C->numrhs = *t++;
01485     C->Pointer = C->Buffer + oldcpointer;
01486 }
01487 a = AT.pWorkSpace+oww;
01488 t = *a;
01489 for ( j = 1; j < tcount; j++ ) { *a = a[1]; a++; }
01490 *a = t;
01491 }
01492 }
01493 (thewildcards[iraise-1])++;
01494 }
01495 /*
01496 #] Case 3:
01497 */
01498 NoSuccess:
01499     if ( oldwilval > 0 ) {
01500 nomatch:;
01501         j = nwstore;
01502         m = AN.WildValue;
01503         t = lowlevel; r = AT.WildMask;
01504         if ( j > 0 ) {
01505             do {
01506                 *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01507             } while ( --j > 0 );
01508         }
01509         C->numrhs = *t++;
01510         C->Pointer = C->Buffer + oldcpointer;
01511     }
01512     AT.WorkPointer = oldworkpointer;
01513     AT.pWorkPointer = oww;
01514     return(0);
01515 }
01516
01517 /*
01518 #] FunMatchCy :
01519 #[ FunMatchSy :
01520
01521     Matching of (anti)symmetric functions.
01522     Like MatchE, but now for general functions.
01523 */
01524
01525 int FunMatchSy(PHEAD WORD *pattern, WORD *fun, WORD *inter, WORD par)
01526 {
01527     GETBIDENTITY
01528     WORD *t, *tstop, *p, *pstop, *m, *r, *oldworkpointer = AT.WorkPointer;
01529     WORD **a, *thewildcards, oldwilval = 0;
01530     WORD newvalue, *lowlevel = 0, num, assign;
01531     WORD *cycles;
01532     LONG oww = AT.pWorkPointer, lhpars, lhfunnies;
01533     int argcount = 0, funnycount = 0, tcount = 0, signs = 0, signfun = 0, signo;
01534     int type = 0, pnun, i, j, k, nwstore, iraise, cou2;
01535     CBUF *C = cbuf+AT.ebufnum;
01536     int ntwa = 3*AN.NumTotWildArgs+1;
01537     LONG oldcpointer = C->Pointer - C->Buffer;
01538     WORD offset = fun-AN.terstart, *newpat;
01539
01540     if ( (functions[fun[0]-FUNCTION].symmetric & ~REVERSEORDER) == RCYCLESYMMETRIC ) type = 1;
01541     pnun = pattern[0];
01542     nwstore = (AN.WildValue[-SUBEXPSIZE+1]-SUBEXPSIZE)/4;
01543     if ( pnun > FUNCTION + WILDOFFSET ) {
01544         pnun -= WILDOFFSET;
01545         if ( CheckWild(BHEAD pnun,FUNTOFUN,fun[0],&newvalue) ) return(0);
01546         oldwilval = 1;
01547         t = lowlevel = oldworkpointer;
01548         m = AN.WildValue;
01549         i = nwstore;

```

```

01550     r = AT.WildMask;
01551     if ( i > 0 ) {
01552         do {
01553             *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
01554         } while ( --i > 0 );
01555     }
01556     *t++ = C->numrhs;
01557     if ( t >= AT.WorkTop ) {
01558         MLOCK(ErrorMessageLock);
01559         MesWork();
01560         MUNLOCK(ErrorMessageLock);
01561         return(-1);
01562     }
01563     AT.WorkPointer = t;
01564     AddWild(BHEAD pnun,FUNTOFUN,newvalue);
01565 }
01566 if ( (functions[pnum-FUNCTION].symmetric & ~REVERSEORDER) == RCYCLESYMMETRIC ) type = 1;
01567
01568 /* Try for a straight match. After all, both have been normalized */
01569
01570 if ( fun[1] == pattern[1] ) {
01571     i = fun[1]-FUNHEAD; p = pattern+FUNHEAD; t = fun + FUNHEAD;
01572     while ( --i >= 0 ) { if ( *p++ != *t++ ) break; }
01573     if ( i < 0 ) goto quicky;
01574 }
01575
01576 /* First we have to make an inventory. Are there -ARGWILD pointers? */
01577
01578 p = pattern + FUNHEAD;
01579 pstop = pattern + pattern[1];
01580 while ( p < pstop ) {
01581     if ( *p == -ARGWILD ) { p += 2; funnycount++; }
01582     else { NEXTARG(p); argcount++; }
01583 }
01584 t = fun + FUNHEAD;
01585 tstop = fun + fun[1];
01586 while ( t < tstop ) { NEXTARG(t); tcount++; }
01587
01588 if ( argcount > tcount ) return(0);
01589 if ( argcount < tcount && funnycount == 0 ) return(0);
01590 if ( argcount == 0 && tcount == 0 && funnycount == 0 ) {
01591 quicky:
01592     if ( AN.SignCheck && signs != AN.ExpectedSign ) goto NoSuccess;
01593     AN.RepFunList[AN.RepFunNum++] = offset;
01594     AN.RepFunList[AN.RepFunNum++] = signs;
01595     newpat = pattern + pattern[1];
01596     if ( newpat >= AN.patstop ) {
01597         if ( AN.UseFindOnly == 0 ) {
01598             if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01599                 AT.WorkPointer = oldworkpointer;
01600                 AN.UsedOtherFind = 1;
01601                 return(1);
01602             }
01603             j = 0;
01604         }
01605         else {
01606             AT.WorkPointer = oldworkpointer;
01607             return(1);
01608         }
01609     }
01610     else j = ScanFunctions(BHEAD newpat,inter,par);
01611     if ( j ) {
01612         AT.WorkPointer = oldworkpointer;
01613         return(j);
01614     }
01615     goto NoSuccess;
01616 }
01617
01618 /* Store the wildcard assignments */
01619
01620 WantAddPointers(tcount+argcount+funnycount);
01621 AT.pWorkPointer += tcount+argcount+funnycount;
01622 thewildcards = t = AT.WorkPointer;
01623 t += ntw;
01624 if ( oldwilval ) lowlevel = oldworkpointer;
01625 else lowlevel = t;
01626 m = AN.WildValue;
01627 i = nwstore; assig = 0;
01628 if ( i > 0 ) {
01629     r = AT.WildMask;
01630     do {
01631         assig += *r;
01632         *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *m++; *t++ = *r++;
01633     } while ( --i > 0 );
01634     *t++ = C->numrhs;
01635 }
01636 if ( t >= AT.WorkTop ) {

```

```

01637         MLOCK(ErrorMessageLock);
01638         MesWork();
01639         MUNLOCK(ErrorMessageLock);
01640         return(-1);
01641     }
01642     AT.WorkPointer = t;
01643
01644     /* Store pointers to the arguments */
01645
01646     t = fun + FUNHEAD; a = AT.pWorkSpace+oww;
01647     while ( t < tstop ) { *a++ = t; NEXTARG(t) }
01648     lhpars = a-AT.pWorkSpace;
01649     t = pattern + FUNHEAD;
01650     while ( t < pstop ) {
01651         if ( *t != -ARGWILD ) *a++ = t;
01652         NEXTARG(t)
01653     }
01654     lhfunnies = a-AT.pWorkSpace;
01655     t = pattern + FUNHEAD; cou2 = 0;
01656     while ( t < pstop ) {
01657         cou2++;
01658         if ( *t == -ARGWILD ) {
01659             *a++ = t;
01660         }
01661     }
01662     /* signfun: last ?a: tcount-argcount: number of arguments in ?a (assume one ?a)
01663        argcount+funnycount-cou2: arguments after ?a.
01664        Together tells whether moving ?a to end of list is even or odd
01665        */
01666     signfun = ((argcount+funnycount-cou2)*(tcount-argcount)) & 1;
01667     NEXTARG(t)
01668 }
01669 signs += signfun;
01670 if ( funnycount > 0 ) {
01671     if ( ( (functions[fun[0]-FUNCTION].symmetric & ~REVERSEORDER) == SYMMETRIC )
01672         || ( (functions[fun[0]-FUNCTION].symmetric & ~REVERSEORDER) == ANTISYMMETRIC )
01673         || ( (functions[pnum-FUNCTION].symmetric & ~REVERSEORDER) == SYMMETRIC )
01674         || ( (functions[pnum-FUNCTION].symmetric & ~REVERSEORDER) == ANTISYMMETRIC ) ) {
01675         AT.WorkPointer = oldworkpointer;
01676         AT.pWorkPointer = oww;
01677         MLOCK(ErrorMessageLock);
01678         MesPrint("Sorry: no argument field wildcards yet in (anti)symmetric functions");
01679         MUNLOCK(ErrorMessageLock);
01680         Terminate(-1);
01681     }
01682 }
01683 /*
01684 Sort the regular arguments by
01685 1: no wildcards, fast.
01686 2: wildcards that have been assigned.
01687 3: general arguments.
01688 4: wildcards without an assignment.
01689 */
01690 iraise = argcount;
01691 for ( i = 0; i < iraise; i++ ) {
01692     t = AT.pWorkSpace[i+lhpars];
01693     if ( *t > 0 ) { /* Category 3: general argument */
01694         continue;
01695     }
01696     else if ( *t <= -FUNCTION ) {
01697         if ( *t > -FUNCTION - WILDOFFSET ) goto cat1;
01698         type = FUNTOFUN; num = -*t - WILDOFFSET;
01699     }
01700     else if ( *t == -SYMBOL ) {
01701         if ( t[1] < 2*MAXPOWER ) goto cat1;
01702         type = SYMTOSYM; num = t[1] - 2*MAXPOWER;
01703     }
01704     else if ( *t == -INDEX ) {
01705         if ( t[1] < AM.OffsetIndex + WILDOFFSET ) goto cat1;
01706         type = INDTOIND; num = t[1] - WILDOFFSET;
01707     }
01708     else if ( *t == -VECTOR || *t == -MINVECTOR ) {
01709         if ( t[1] < AM.OffsetVector + WILDOFFSET ) goto cat1;
01710         type = VECTOVEC; num = t[1] - WILDOFFSET;
01711     }
01712     else goto cat1; /* Things like -SNUMBER etc. */
01713 }
01714 /*
01715 Now we have a wildcard and have to see whether it was assigned
01716 */
01717 m = AN.WildValue;
01718 j = nwstore;
01719 r = AT.WildMask;
01720 while ( --j >= 0 ) {
01721     if ( m[2] == num && *r ) {
01722         if ( type == *m ) break;
01723         if ( type == SYMTOSYM ) {
01724             if ( *m == SYMTONUM || *m == SYMTOSUB ) break;

```

```

01724         }
01725         else if ( type == INDTOIND ) {
01726             if ( *m == INDTOSUB ) break;
01727         }
01728         else if ( type == VECTOVEC ) {
01729             if ( *m == VECTOMIN || *m == VECTOSUB ) break;
01730         }
01731     }
01732     m += 4; r++;
01733 }
01734 if ( j < 0 ) { /* Category 4: Wildcard that was not assigned */
01735     a = AT.pWorkSpace+lhpar;
01736     iraise--;
01737     if ( iraise != i ) signs++;
01738     m = a[iraise];
01739     a[iraise] = a[i];
01740     a[i] = m; i--;
01741 }
01742 else { /* Category 2: Wildcard that was assigned */
01743     for ( j = 0; j < tcount; j++ ) {
01744         if ( MatchArgument(BHEAD AT.pWorkSpace[oww+j],t) ) {
01745             k = nwstore;
01746             r = AT.WildMask;
01747             num = 0;
01748             while ( --k >= 0 ) num += *r++;
01749             if ( num == assign ) { /* no wildcards were changed */
01750                 goto oneless;
01751             }
01752             break;
01753         }
01754     }
01755     if ( j >= tcount ) goto NoSuccess;
01756     j = nwstore;
01757     m = AN.WildValue;
01758     t = thewildcards + ntw; r = AT.WildMask;
01759     if ( j > 0 ) {
01760         do { /* undo assignment */
01761             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01762         } while ( --j > 0 );
01763     }
01764     C->numrhs = *t++;
01765 }
01766 continue;
01767 cat1:
01768 for ( j = 0; j < tcount; j++ ) {
01769     m = AT.pWorkSpace[j+oww];
01770     if ( *t != *m ) continue;
01771     if ( *t < 0 ) {
01772         if ( *t <= -FUNCTION ) break;
01773         if ( t[1] == m[1] ) break;
01774     }
01775     else {
01776         k = *t; r = t;
01777         while ( --k >= 0 && *m++ == *r++ ) {}
01778         if ( k < 0 ) break;
01779     }
01780 }
01781 if ( j >= tcount ) goto NoSuccess; /* Even the fixed ones don't match */
01782 oneless:
01783 signs += j - i;
01784 /*
01785     The next statements replace the one that is commented out
01786 */
01787 tcount--;
01788 while ( j < tcount ) {
01789     AT.pWorkSpace[oww+j] = AT.pWorkSpace[oww+j+1]; j++;
01790 }
01791 /*
01792     AT.pWorkSpace[oww+j] = AT.pWorkSpace[oww+(-tcount)];
01793 */
01794 argcount--; j = i;
01795 while ( j < argcount ) {
01796     AT.pWorkSpace[lhpar+j] = AT.pWorkSpace[lhpar+j+1]; j++;
01797 }
01798 iraise--; i--;
01799 }
01800 /*
01801     Now we see whether there are any ARGWILD objects that have been
01802     assigned already. In that case the work simplifies considerably.
01803     Currently (12-nov-2001) only in (R)CYCLIC functions; hence we do not
01804     test the sign!
01805 */
01806 for ( i = 0; i < funnycount; i++ ) {
01807     k = AT.pWorkSpace[lhfunnies+i][1];
01808     m = AN.WildValue;
01809     j = nwstore;
01810     r = AT.WildMask;

```

```

01811     while ( --j >= 0 ) {
01812         if ( *m == ARGTOARG && m[2] == k ) break;
01813         m += 4; r++;
01814     }
01815     if ( *r == 0 ) continue; /* not assigned yet */
01816     m = cbuf[AT.ebufnum].rhs[m[3]];
01817     if ( *m > 0 ) { /* Tensor arguments */
01818         j = *m;
01819         if ( j > tcount - argcount ) goto NoSuccess;
01820         while ( --j >= 0 ) {
01821             m++;
01822             if ( *m < 0 ) type = -VECTOR;
01823             else if ( *m < AM.OffsetIndex ) type = -SNUMBER;
01824             else type = -INDEX;
01825             a = AT.pWorkSpace+oww;
01826             for ( k = 0; k < tcount; k++ ) {
01827                 if ( a[k][0] != type || a[k][1] != *m ) continue;
01828                 a[k] = a[--tcount];
01829                 goto nextjarg;
01830             }
01831             goto NoSuccess;
01832 nextjarg:;
01833         }
01834     }
01835     else {
01836         m++;
01837         while ( *m ) {
01838             for ( k = 0; k < tcount; k++ ) {
01839                 t = AT.pWorkSpace[oww+k];
01840                 if ( *t != *m ) continue;
01841                 r = m;
01842                 if ( *r < 0 ) {
01843                     if ( *r < -FUNCTION ) goto nextargw;
01844                     else if ( r[1] == t[1] ) goto nextargw;
01845                 }
01846                 else {
01847                     j = *r;
01848                     while ( --j >= 0 && *r++ == *t++ ) {}
01849                     if ( j < 0 ) goto nextargw;
01850                 }
01851             }
01852             goto NoSuccess;
01853 nextargw:;
01854             AT.pWorkSpace[oww+k] = AT.pWorkSpace[oww+(--tcount)];
01855             NEXTARG(m)
01856         }
01857         AT.pWorkSpace[lhfunnies+i] = AT.pWorkSpace[lhfunnies+(--funnycount)];
01858     }
01859     if ( tcount == 0 ) {
01860         if ( argcount > 0 ) goto NoSuccess;
01861         for ( i = 0; i < funnycount; i++ ) {
01862             AddWild(BHEAD AT.pWorkSpace[lhfunnies+i][1], ARGTOARG, 0);
01863         }
01864         goto quicky;
01865     }
01866 }
01867 /*
01868 We have now in lhpars first iraise elements with a dubious nature.
01869 Then argcount-iraise wildcards that have not been assigned.
01870 In lhfunnies we have funnycount ARGTOARG objects. ( (R)CyCLIC only )
01871
01872 First work our way through the 'dubious' objects
01873 We check whether assig changes.
01874 */
01875 for ( i = 0; i < iraise; i++ ) {
01876     for ( j = 0; j < tcount; j++ ) {
01877         if ( MatchArgument(BHEAD AT.pWorkSpace[oww+j], AT.pWorkSpace[lhpars+i]) ) {
01878             k = nwstore;
01879             r = AT.WildMask;
01880             num = 0;
01881             while ( --k >= 0 ) num += *r++;
01882             if ( num == assig ) { /* no wildcards were changed */
01883                 signs += j-i;
01884                 AT.pWorkSpace[oww+j] = AT.pWorkSpace[oww+(--tcount)];
01885                 if ( tcount > j ) signs += tcount-j-1;
01886                 argcount--;
01887                 a = AT.pWorkSpace + lhpars;
01888                 for ( j = i; j < argcount; j++ ) a[j] = a[j+1];
01889                 iraise--;
01890                 goto nextiraise;
01891             }
01892             else { /* We cannot use this yet */
01893                 j = nwstore;
01894                 m = AN.WildValue;
01895                 t = thewildcards + ntwa; r = AT.WildMask;
01896                 if ( j > 0 ) {
01897                     do { /* undo assignment */

```

```

01898             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
01899         } while ( --j > 0 );
01900     }
01901     C->numrhs = *t++;
01902     C->Pointer = C->Buffer + oldcpointer;
01903     goto nexttiraise;
01904 }
01905 }
01906 }
01907 goto NoSuccess;
01908 nexttiraise:;
01909 }
01910 /*
01911     Now all leftover patterns have unassigned wildcards in them.
01912     From now on we are in potential factorial territory.
01913
01914     Strategy:
01915         1: cycle through the regular objects.
01916         2: save wildcard settings
01917         3: divide the ARGWILDS
01918         4: make permutations of leftover arguments
01919         5: try them all
01920 */
01921 cycles = AT.WorkPointer;
01922 for ( i = 0; i < tcount; i++ ) cycles[i] = tcount-i;
01923 AT.WorkPointer += tcount;
01924 signo = 0;
01925 /*MesPrint("<1> signs = %d",signs);*/
01926 for (;;) {
01927     WORD oRepFunNum = AN.RepFunNum;
01928     for ( j = 0; j < argcount; j++ ) {
01929         if ( MatchArgument (BHEAD AT.pWorkSpace[oww+j],AT.pWorkSpace[lhpars+j]) == 0 ) {
01930             break;
01931         }
01932     }
01933     if ( j >= argcount ) {
01934 /*
01935         Thus far we have a match. Now the funnies
01936 */
01937         if ( funnycount ) {
01938             AT.WorkPointer = oldworkpointer;
01939             AT.pWorkPointer = oww;
01940             MLOCK(ErrorMessageLock);
01941             MesPrint("Sorry: no argument field wildcards yet in (anti)symmetric functions");
01942             MUNLOCK(ErrorMessageLock);
01943 /*
01944             Bugfix 31-oct-2001, reported by Kasper Peeters
01945             We returned here with value -1 but that is not caught.
01946             Extra note (12-nov-2001): the sign becomes a bit problematic
01947             if we have funnies. No more than one allowed in antisymmetric
01948             functions, or we have serious problems.
01949 */
01950             Terminate(-1);
01951         }
01952
01953         AN.RepFunList[AN.RepFunNum++] = offset;
01954         if ( ( (functions[fun[0]-FUNCTION].symmetric & ~REVERSEORDER) == ANTISYMMETRIC )
01955             || ( (functions[pnum-FUNCTION].symmetric & ~REVERSEORDER) == ANTISYMMETRIC ) ) {
01956             AN.RepFunList[AN.RepFunNum++] = ( signs + signo ) & 1;
01957         }
01958         else {
01959             AN.RepFunList[AN.RepFunNum++] = 0;
01960         }
01961         newpat = pattern + pattern[1];
01962         if ( newpat >= AN.patstop ) {
01963             WORD countsgn, sgn = 0;
01964             for ( countsgn = oRepFunNum+1; countsgn < AN.RepFunNum; countsgn += 2 ) {
01965                 if ( AN.RepFunList[countsgn] ) sgn ^= 1;
01966             }
01967             if ( AN.SignCheck == 0 || sgn == AN.ExpectedSign ) {
01968                 AT.WorkPointer = oldworkpointer;
01969                 AT.pWorkPointer = oww;
01970                 return(1);
01971             }
01972             if ( AN.UseFindOnly == 0 ) {
01973                 if ( FindOnce(BHEAD AN.findTerm,AN.findPattern) ) {
01974                     AT.WorkPointer = oldworkpointer;
01975                     AT.pWorkPointer = oww;
01976                     AN.UsedOtherFind = 1;
01977                     return(1);
01978                 }
01979             }
01980             j = 0;
01981         }
01982         else j = ScanFunctions(BHEAD newpat,inter,par);
01983         if ( j ) {
01984             WORD countsgn, sgn = 0;

```

```

01985         for ( countsgn = oRepFunNum+1; countsgn < AN.RepFunNum; countsgn += 2 ) {
01986             if ( AN.RepFunList[countsgn] ) sgn ^= 1;
01987         }
01988         if ( AN.SignCheck == 0 || sgn == AN.ExpectedSign ) {
01989             AT.WorkPointer = oldworkpointer;
01990             AT.pWorkPointer = ow;
01991             return(j);
01992         }
01993     }
01994     AN.RepFunNum = oRepFunNum;
01995     i = argcount - 1;
01996 }
01997 else i = j;
01998 j = nwstore;
01999 m = AN.WildValue;
02000 t = thewildcards + ntw; r = AT.WildMask;
02001 if ( j > 0 ) {
02002     do {
02003         *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
02004     } while ( --j > 0 );
02005 }
02006 C->numrhs = *t++;
02007 C->Pointer = C->Buffer + oldcpointer;
02008 /*
02009     On to the next cycle
02010 */
02011 a = AT.pWorkSpace + ow;
02012 for ( j = i+1, t = a[i]; j < tcount; j++ ) a[j-1] = a[j];
02013 a[tcount-1] = t; cycles[i]--;
02014 signo += tcount - i - 1;
02015 while ( cycles[i] <= 0 ) {
02016     cycles[i] = tcount - i;
02017     i--;
02018     if ( i < 0 ) goto NoSuccess;
02019 }
02020 /*
02021     MLOCK(ErrorMessageLock);
02022     MesPrint("Cycle i = %d",i);
02023     MUNLOCK(ErrorMessageLock);
02024 */
02025 for ( j = i+1, t = a[i]; j < tcount; j++ ) a[j-1] = a[j];
02026 a[tcount-1] = t; cycles[i]--;
02027 signo += tcount - i - 1;
02028 }
02029 NoSuccess:
02030 if ( oldwilval > 0 ) {
02031     j = nwstore;
02032     m = AN.WildValue;
02033     t = lowlevel; r = AT.WildMask;
02034     if ( j > 0 ) {
02035         do {
02036             *m++ = *t++; *m++ = *t++; *m++ = *t++; *m++ = *t++; *r++ = *t++;
02037         } while ( --j > 0 );
02038     }
02039     C->numrhs = *t++;
02040     C->Pointer = C->Buffer + oldcpointer;
02041 }
02042 AT.WorkPointer = oldworkpointer;
02043 AT.pWorkPointer = ow;
02044 return(0);
02045 }
02046 /*
02047 #] FunMatchSy :
02048 #[ MatchArgument :
02049 */
02050 int MatchArgument(PHEAD WORD *arg, WORD *pat)
02051 {
02052     GETBIDENTITY
02053     WORD *m = pat, *t = arg, i, j, newvalue;
02054     WORD *argmstop = pat, *argtstop = arg;
02055     WORD *cto, *cfrom, *csav, ci;
02056     WORD oRepFunNum, *oRepFunList;
02057     WORD *oterstart, *oterstop, *opatstop;
02058     WORD wildargs, wildeat;
02059     WORD *mtrmstop, *ttrmstop, *msubstop, msizcoef;
02060     WORD *wildargtaken;
02061     int wc = 1;
02062     NEXTARG(argmstop);
02063     NEXTARG(argtstop);
02064     /*
02065     #[ Both fast :
02066     */
02067     if ( *m < 0 && *t < 0 ) {
02068         if ( *t <= -FUNCTION ) {

```



```

02072         if ( *t == *m ) {}
02073     else if ( *m <= -FUNCTION-WILDOFFSET
02074 && functions[-*t-FUNCTION].spec
02075 == functions[-*m-FUNCTION-WILDOFFSET].spec ) {
02076         i = -*m - WILDOFFSET; wc = 2;
02077         if ( CheckWild(BHEAD i,FUNTOFUN,-*t,&newvalue) ) {
02078             return(0);
02079         }
02080         AddWild(BHEAD i,FUNTOFUN,newvalue);
02081     }
02082     else if ( *m == -SYMBOL && m[1] >= 2*MAXPOWER ) {
02083         i = m[1] - 2*MAXPOWER;
02084         AN.argaddress = AT.FunArg;
02085         AT.FunArg[ARGHEAD+1] = -*t;
02086         if ( CheckWild(BHEAD i,SYMTOSUB,1,AN.argaddress) ) return(0);
02087         AddWild(BHEAD i,SYMTOSUB,0);
02088     }
02089     else return(0);
02090 }
02091 else if ( *t == *m ) {
02092     if ( t[1] == m[1] ) {}
02093     else if ( *t == -SYMBOL ) {
02094         j = SYMTOSYM;
02095 SymAll:         if ( ( i = m[1] - 2*MAXPOWER ) < 0 ) return(0);
02096         wc = 2;
02097         if ( CheckWild(BHEAD i,j,t[1],&newvalue) ) return(0);
02098         AddWild(BHEAD i,j,newvalue);
02099     }
02100     else if ( *t == -INDEX ) {
02101 IndAll:         i = m[1] - WILDOFFSET;
02102         if ( i < AM.OffsetIndex || i >= WILDOFFSET+AM.OffsetIndex )
02103             return(0);
02104         /* We kill the summed over indices here */
02105         wc = 2;
02106         if ( CheckWild(BHEAD i,INDTOIND,t[1],&newvalue) ) return(0);
02107         AddWild(BHEAD i,INDTOIND,newvalue);
02108     }
02109     else if ( *t == -VECTOR || *t == -MINVECTOR ) {
02110         i = m[1] - WILDOFFSET;
02111         if ( i < AM.OffsetVector ) return(0);
02112         wc = 2;
02113         if ( CheckWild(BHEAD i,VECTOVEC,t[1],&newvalue) ) return(0);
02114         AddWild(BHEAD i,VECTOVEC,newvalue);
02115     }
02116     else return(0);
02117 }
02118 else if ( *m == -INDEX && m[1] >= AM.OffsetIndex+WILDOFFSET
02119 && m[1] < AM.OffsetIndex+(WILDOFFSET<1) ) {
02120     if ( *t == -VECTOR ) goto IndAll;
02121     if ( *t == -SNUMBER && t[1] >= 0 && t[1] < AM.OffsetIndex ) goto IndAll;
02122     if ( *t == -MINVECTOR ) {
02123         i = m[1] - WILDOFFSET;
02124         AN.argaddress = AT.MinVecArg;
02125         AT.MinVecArg[ARGHEAD+3] = t[1];
02126         wc = 2;
02127         if ( CheckWild(BHEAD i,INDTOSUB,1,AN.argaddress) ) return(0);
02128         AddWild(BHEAD i,INDTOSUB,(WORD)0);
02129     }
02130     else return(0);
02131 }
02132 else if ( *m == -SYMBOL && m[1] >= 2*MAXPOWER && *t == -SNUMBER ) {
02133     j = SYMTONUM;
02134     goto SymAll;
02135 }
02136 else if ( *m == -VECTOR && *t == -MINVECTOR &&
02137 ( i = m[1] - WILDOFFSET ) >= AM.OffsetVector ) {
02138     wc = 2;
02139 /*
02140     AN.argaddress = AT.MinVecArg;
02141     AT.MinVecArg[ARGHEAD+3] = t[1];
02142     if ( CheckWild(BHEAD i,VECTOSUB,1,AN.argaddress) ) return(0);
02143     AddWild(BHEAD i,VECTOSUB,(WORD)0);
02144 */
02145     if ( CheckWild(BHEAD i,VECTOMIN,t[1],&newvalue) ) return(0);
02146     AddWild(BHEAD i,VECTOMIN,newvalue);
02147 }
02148 }
02149 else if ( *m == -MINVECTOR && *t == -VECTOR &&
02150 ( i = m[1] - WILDOFFSET ) >= AM.OffsetVector ) {
02151     wc = 2;
02152 /*
02153     AN.argaddress = AT.MinVecArg;
02154     AT.MinVecArg[ARGHEAD+3] = t[1];
02155     if ( CheckWild(BHEAD i,VECTOSUB,1,AN.argaddress) ) return(0);
02156     AddWild(BHEAD i,VECTOSUB,(WORD)0);
02157 */
02158     if ( CheckWild(BHEAD i,VECTOMIN,t[1],&newvalue) ) return(0);

```

```

02159         AddWild(BHEAD i, VECTOMIN, newvalue);
02160     }
02161     else return(0);
02162 }
02163 /*
02164 #] Both fast :
02165 #[ Fast arg :
02166 */
02167 else if ( *m > 0 && *t <= -FUNCTION ) {
02168     if ( ( m[ARGHEAD]+ARGHEAD == *m ) && m[*m-1] == 3
02169         && m[*m-2] == 1 && m[*m-3] == 1 && m[ARGHEAD+1] >= FUNCTION
02170         && m[ARGHEAD+2] == *m-ARGHEAD-4 ) { /* Check for f(?a) etc */
02171         WORD *mmmst, *mmm, mmmi;
02172         if ( m[ARGHEAD+1] >= FUNCTION+WILDOFFSET ) {
02173             mmmi = *m - WILDOFFSET;
02174             wc = 2;
02175             if ( CheckWild(BHEAD mmmi, FUNTOFUN, -*t, &newvalue) ) return(0);
02176             AddWild(BHEAD mmmi, FUNTOFUN, newvalue);
02177         }
02178         else if ( m[ARGHEAD+1] != -*t ) return(0);
02179     /*
02180         Only arguments allowed are ?a etc.
02181     */
02182     mmmst = m+*m-3;
02183     mmm = m + ARGHEAD + FUNHEAD + 1;
02184     while ( mmm < mmmst ) {
02185         if ( *mmm != -ARGWILD ) return(0);
02186         mmmi = 0;
02187         AN.argaddress = t; wc = 2;
02188         if ( CheckWild(BHEAD mmm[1], ARGTOARG, mmmi, t) ) return(0);
02189         AddWild(BHEAD mmm[1], ARGTOARG, mmmi);
02190         mmm += 2;
02191     }
02192 }
02193     else return(0);
02194 }
02195 /*
02196 #] Fast arg :
02197 #[ Fast pat :
02198 */
02199 else if ( *m < 0 && *t > 0 ) {
02200     if ( *m == -SYMBOL ) { /* SYMTOSUB */
02201         if ( m[1] < 2*MAXPOWER ) return(0);
02202         i = m[1] - 2*MAXPOWER;
02203         AN.argaddress = t; wc = 2;
02204         if ( CheckWild(BHEAD i, SYMTOSUB, 1, AN.argaddress) ) return(0);
02205         AddWild(BHEAD i, SYMTOSUB, 0);
02206     }
02207     else if ( *m == -VECTOR ) {
02208         if ( ( i = m[1] - WILDOFFSET ) < AM.OffsetVector ) return(0);
02209         AN.argaddress = t; wc = 2;
02210         if ( CheckWild(BHEAD i, VECTOSUB, 1, t) ) return(0);
02211         AddWild(BHEAD i, VECTOSUB, (WORD)0);
02212     }
02213     else if ( *m == -INDEX ) {
02214         if ( ( i = m[1] - WILDOFFSET ) < AM.OffsetIndex ) return(0);
02215         if ( i >= AM.OffsetIndex + WILDOFFSET ) return(0);
02216         AN.argaddress = t; wc = 2;
02217         if ( CheckWild(BHEAD i, INDOSUB, 1, AN.argaddress) ) return(0);
02218         AddWild(BHEAD i, INDOSUB, (WORD)0);
02219     }
02220     else return(0);
02221 }
02222 /*
02223 #] Fast pat :
02224 #[ Both general :
02225 */
02226 else if ( *m > 0 && *t > 0 ) {
02227     i = *m;
02228     do { if ( *m++ != *t++ ) break; } while ( --i > 0 );
02229     if ( i > 0 ) {
02230     /*
02231         Not an exact match here.
02232         We have to hope that the pattern contains a composite wildcard.
02233     */
02234         m = pat; t = arg;
02235         m += ARGHEAD; t += ARGHEAD; /* Point at (first?) term */
02236         mtrmstop = m + *m;
02237         ttrmstop = t + *t;
02238         if ( mtrmstop < argmstop ) return(0); /* More than one term */
02239         msizcoef = mtrmstop[-1];
02240         if ( msizcoef < 0 ) msizcoef = -msizcoef;
02241         msubstop = mtrmstop - msizcoef;
02242         m++;
02243         if ( m >= msubstop ) return(0); /* Only coefficient */
02244     /*
02245         Here we have a composite term. It can match provided it

```

```

02246 matches the entire argument. This argument must be a
02247 single term also and the coefficients should match
02248 (more or less).
02249 The matching takes:
02250 1: Match the functions etc. Nothing can be left.
02251 2: Match dotproducts and symbols. ONLY must match
02252 and nothing may be left.
02253 For safety it is best to take the term out and put it
02254 in workspace.
02255 */
02256 if ( argtstop > ttrmstop ) return(0);
02257 m--;
02258
02259 oterstart = AN.terstart;
02260 oterstop = AN.terstop;
02261 opatstop = AN.patstop;
02262 oRepFunList = AN.RepFunList;
02263 oRepFunNum = AN.RepFunNum;
02264 AN.RepFunNum = 0;
02265 wildargtaken = AT.WorkPointer;
02266 AN.RepFunList = wildargtaken + AN.NumTotWildArgs;
02267 AT.WorkPointer = (WORD *) ((UBYTE *) (AN.RepFunList)) + AM.MaxTer/2;
02268 csav = cto = AT.WorkPointer;
02269 cfrom = t;
02270 ci = *t;
02271 while ( --ci >= 0 ) *cto++ = *cfrom++;
02272 AT.WorkPointer = cto;
02273 ci = msizcoef;
02274 cfrom = mtrmstop;
02275 while ( --ci >= 0 ) {
02276     if ( *--cfrom != *--cto ) {
02277         AT.WorkPointer = wildargtaken;
02278         AN.RepFunList = oRepFunList;
02279         AN.RepFunNum = oRepFunNum;
02280         AN.terstart = oterstart;
02281         AN.terstop = oterstop;
02282         AN.patstop = opatstop;
02283         return(0);
02284     }
02285 }
02286 *m -= msizcoef;
02287 wildargs = AN.WildArgs;
02288 wildeat = AN.WildEat;
02289 for ( i = 0; i < wildargs; i++ ) wildargtaken[i] = AT.WildArgTaken[i];
02290 AN.ForFindOnly = 0; AN.UseFindOnly = 1;
02291 AN.nogroundlevel++;
02292 if ( FindRest(BHEAD csav,m) && ( AN.UsedOtherFind || FindOnly(BHEAD csav,m) ) ) { }
02293 else {
02294     *m += msizcoef;
02295     AT.WorkPointer = wildargtaken;
02296     AN.RepFunList = oRepFunList;
02297     AN.RepFunNum = oRepFunNum;
02298     AN.terstart = oterstart;
02299     AN.terstop = oterstop;
02300     AN.patstop = opatstop;
02301     AN.WildArgs = wildargs;
02302     AN.WildEat = wildeat;
02303     AN.nogroundlevel--;
02304     for ( i = 0; i < wildargs; i++ ) AT.WildArgTaken[i] = wildargtaken[i];
02305     return(0);
02306 }
02307 AN.nogroundlevel--;
02308 AN.WildArgs = wildargs;
02309 AN.WildEat = wildeat;
02310 for ( i = 0; i < wildargs; i++ ) AT.WildArgTaken[i] = wildargtaken[i];
02311 Substitute(BHEAD csav,m,1);
02312 cto = csav;
02313 cfrom = cto + *cto - msizcoef;
02314 cto++;
02315 *m += msizcoef;
02316 AT.WorkPointer = wildargtaken;
02317 AN.RepFunList = oRepFunList;
02318 AN.RepFunNum = oRepFunNum;
02319 AN.terstart = oterstart;
02320 AN.terstop = oterstop;
02321 AN.patstop = opatstop;
02322 if ( *cto != SUBEXPRESSION ) return(0);
02323 cto += cto[1];
02324 if ( cto < cfrom ) return(0);
02325 }
02326 }
02327 /*
02328 #] Both general :
02329 */
02330 else return(0);
02331 /*
02332 And now the success: (wc = 2 means that there was a wildcard involved)

```

```

02333 */
02334     return (wc);
02335 }
02336
02337 /*
02338     #] MatchArgument :
02339 */

```


4.143 tables.c File Reference

```

#include "form3.h"
#include "minos.h"
#include "comtool.h"

```

Include dependency graph for tables.c:

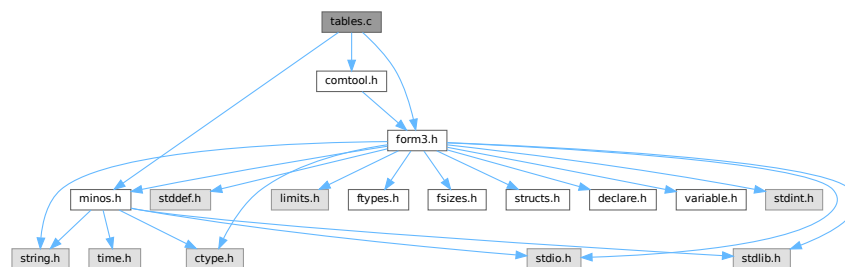

Functions

- void [ClearTableTree](#) (TABLES T)
- int [InsTableTree](#) (TABLES T, WORD *tp)
- void [RedoTableTree](#) (TABLES T, int newsize)
- int [FindTableTree](#) (TABLES T, WORD *tp, int inc)
- int [DoTableExpansion](#) (WORD *term, WORD level)
- int [CoTableBase](#) (UBYTE *s)
- int [FlipTable](#) (FUNCTIONS f, int type)
- int [SpareTable](#) (TABLES TT)
- DBASE * [FindTB](#) (UBYTE *name)
- int [CoTBcreate](#) (UBYTE *s)
- int [CoTBopen](#) (UBYTE *s)
- int [CoTBaddto](#) (UBYTE *s)
- int [CoTBenter](#) (UBYTE *s)
- int [CoTestUse](#) (UBYTE *s)
- int [CheckTableDeclarations](#) (DBASE *d)
- int [CoTBload](#) (UBYTE *ss)
- int [TestUse](#) (WORD *term, WORD level)
- int [CoTBaudit](#) (UBYTE *s)
- int [CoTBon](#) (UBYTE *s)
- int [CoTBoff](#) (UBYTE *s)
- int [CoTBcleanup](#) (UBYTE *s)
- int [CoTBreplace](#) (UBYTE *s)
- int [CoTBuse](#) (UBYTE *s)
- int [CoApply](#) (UBYTE *s)
- int [CoTBhelp](#) (UBYTE *s)

- void [ReWorkT](#) (WORD *term, WORD *funcs, WORD numfuncs)
- void [Apply](#) (WORD *term, WORD level)
- int [ApplyExec](#) (WORD *term, int maxtogo, WORD level)
- void [ApplyReset](#) (WORD level)
- void [TableReset](#) (void)
- int [ReleaseTB](#) (void)

Variables

- char * [helptb](#) []

4.143.1 Detailed Description

Contains all functions that deal with the table bases on the 'FORM level' The low level database routines are in [minos.c](#)

Definition in file [tables.c](#).

4.143.2 Function Documentation

4.143.2.1 ClearTableTree()

```
void ClearTableTree (  
    TABLES T )
```

Definition at line 72 of file [tables.c](#).

4.143.2.2 InsTableTree()

```
int InsTableTree (  
    TABLES T,  
    WORD * tp )
```

Definition at line 103 of file [tables.c](#).

4.143.2.3 RedoTableTree()

```
void RedoTableTree (  
    TABLES T,  
    int newsiz )
```

Definition at line 266 of file [tables.c](#).

4.143.2.4 FindTableTree()

```
int FindTableTree (  
    TABLES T,  
    WORD * tp,  
    int inc )
```

Definition at line 291 of file [tables.c](#).

4.143.2.5 DoTableExpansion()

```
int DoTableExpansion (
    WORD * term,
    WORD level )
```

Definition at line 334 of file [tables.c](#).

4.143.2.6 CoTableBase()

```
int CoTableBase (
    UBYTE * s )
```

Definition at line 627 of file [tables.c](#).

4.143.2.7 FlipTable()

```
int FlipTable (
    FUNCTIONS f,
    int type )
```

Definition at line 671 of file [tables.c](#).

4.143.2.8 SpareTable()

```
int SpareTable (
    TABLES TT )
```

Definition at line 694 of file [tables.c](#).

4.143.2.9 FindTB()

```
DBASE * FindTB (
    UBYTE * name )
```

Definition at line 734 of file [tables.c](#).

4.143.2.10 CoTBcreate()

```
int CoTBcreate (
    UBYTE * s )
```

Definition at line 756 of file [tables.c](#).

4.143.2.11 CoTBopen()

```
int CoTBopen (
    UBYTE * s )
```

Definition at line 772 of file [tables.c](#).

4.143.2.12 CoTBaddto()

```
int CoTBaddto (
    UBYTE * s )
```

Definition at line 801 of file [tables.c](#).

4.143.2.13 CoTBenter()

```
int CoTBenter (
    UBYTE * s )
```

Definition at line 974 of file [tables.c](#).

4.143.2.14 CoTestUse()

```
int CoTestUse (
    UBYTE * s )
```

Definition at line 1133 of file [tables.c](#).

4.143.2.15 CheckTableDeclarations()

```
int CheckTableDeclarations (
    DBASE * d )
```

Definition at line 1178 of file [tables.c](#).

4.143.2.16 CoTBload()

```
int CoTBload (
    UBYTE * ss )
```

Definition at line 1252 of file [tables.c](#).

4.143.2.17 TestUse()

```
int TestUse (
    WORD * term,
    WORD level )
```

Definition at line 1414 of file [tables.c](#).

4.143.2.18 CoTBaudit()

```
int CoTBaudit (
    UBYTE * s )
```

Definition at line 1474 of file [tables.c](#).

4.143.2.19 CoTBon()

```
int CoTBon (
    UBYTE * s )
```

Definition at line 1514 of file [tables.c](#).

4.143.2.20 CoTBoff()

```
int CoTBoff (
    UBYTE * s )
```

Definition at line 1545 of file [tables.c](#).

4.143.2.21 CoTBcleanup()

```
int CoTBcleanup (
    UBYTE * s )
```

Definition at line 1576 of file [tables.c](#).

4.143.2.22 CoTBreplace()

```
int CoTBreplace (
    UBYTE * s )
```

Definition at line 1588 of file [tables.c](#).

4.143.2.23 CoTBuse()

```
int CoTBuse (
    UBYTE * s )
```

Definition at line 1603 of file [tables.c](#).

4.143.2.24 CoApply()

```
int CoApply (
    UBYTE * s )
```

Definition at line 1797 of file [tables.c](#).

4.143.2.25 CoTBhelp()

```
int CoTBhelp (
    UBYTE * s )
```

Definition at line 1884 of file [tables.c](#).

4.143.2.26 ReWorkT()

```
void ReWorkT (
    WORD * term,
    WORD * funcs,
    WORD numfuncs )
```

Definition at line 1900 of file [tables.c](#).

4.143.2.27 Apply()

```
void Apply (
    WORD * term,
    WORD level )
```

Definition at line 1981 of file [tables.c](#).

4.143.2.28 ApplyExec()

```
int ApplyExec (
    WORD * term,
    int maxtogo,
    WORD level )
```

Definition at line 2039 of file [tables.c](#).

4.143.2.29 ApplyReset()

```
void ApplyReset (
    WORD level )
```

Definition at line 2256 of file [tables.c](#).

4.143.2.30 TableReset()

```
void TableReset (
    void )
```

Definition at line 2291 of file [tables.c](#).

4.143.2.31 ReleaseTB()

```
int ReleaseTB (
    void )
```

Definition at line 2317 of file [tables.c](#).

4.143.3 Variable Documentation

4.143.3.1 helptb

char* helptb[]

Definition at line 1852 of file [tables.c](#).

4.144 tables.c

[Go to the documentation of this file.](#)

```

00001
00006 /* #[ License : */
00007 /*
00008 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[ License : */
00032 /*
00033 *   #[ Includes :
00034 *
00035 *   File contains the routines for the tree structure of sparse tables
00036 *   We insert elements by
00037 *   InsTableTree(T,tp) with T the TABLES element and tp the pointer
00038 *   to the indices.
00039 *   We look for elements with
00040 *   FindTableTree(T,tp,inc) with T the TABLES element, tp the pointer to the
00041 *   indices or the function arguments and inc tells which of these options.
00042 *   The tree is cleared with ClearTableTree(T) and we rebuild the tree
00043 *   after a .store in which we lost a part of the table with
00044 *   RedoTableTree(T,newsize)
00045 *
00046 *   In T->tablepointers we have the lists of indices for each element.
00047 *   Additionally for each element there is an extension. There are
00048 *   TABLEEXTENSION WORDs reserved for that. The old system had two words
00049 *   One for the element in the rhs of the compile buffer and one for
00050 *   an additional rhs in case the original would be overwritten by a new
00051 *   definition, but the old was fixed by .global and hence it should be possible
00052 *   to restore it.
00053 *   New use (new = 24-sep-2001)
00054 *   rhs1,numCompBuffer1,rhs2,numCompBuffer2,usage
00055 *   Hence TABLEEXTENSION will be 5. Note that for 64 bits the use of the
00056 *   compiler buffer is overdoing it a bit, but it would be too complicated
00057 *   to try to give it special code.
00058 */
00059
00060 #include "form3.h"
00061 #include "minos.h"
00062 #include "comtool.h"
00063
00064 /* static UBYTE *sparse = (UBYTE *) "sparse"; */
00065 static UBYTE *tablebase = (UBYTE *) "tablebase";
00066
00067 /*
00068 *   #[ Includes :
00069 *   #[ ClearTableTree :
00070 */

```

```

00071
00072 void ClearTableTree(TABLES T)
00073 {
00074     COMPTREE *root;
00075     if ( T->boomlijst == 0 ) {
00076         T->MaxTreeSize = 125;
00077         T->boomlijst = (COMPTREE *)Malloc1(T->MaxTreeSize*sizeof(COMPTREE),
00078             "ClearTableTree");
00079     }
00080     root = T->boomlijst;
00081     T->numtree = 0;
00082     T->rootnum = 0;
00083     root->left = -1;
00084     root->right = -1;
00085     root->parent = -1;
00086     root->blnce = 0;
00087     root->value = -1;
00088     root->usage = 0;
00089 }
00090
00091 /*
00092 #] ClearTableTree :
00093 #[ InsTableTree :
00094
00095 int InsTableTree(TABLES T,WORD *,arglist)
00096     Searches for the element specified by the list of arguments.
00097     If found, it returns -(the offset in T->tablepointers)
00098     If not found, it will allocate a new element, balance the tree if
00099     necessary and return the number of the element in the boomlijst
00100     This number is always > 0, because we start from 1.
00101 */
00102
00103 int InsTableTree(TABLES T, WORD *tp)
00104 {
00105     COMPTREE *boomlijst, *q, *p, *s;
00106     WORD *v1, *v2, *v3, xstop;
00107     int ip, iq, is;
00108     if ( T->numtree + 1 >= T->MaxTreeSize ) {
00109         if ( T->MaxTreeSize == 0 ) ClearTableTree(T);
00110         else {
00111             is = T->MaxTreeSize * 2;
00112             s = (COMPTREE *)Malloc1(is*sizeof(COMPTREE),"InsTableTree");
00113             for ( ip = 0; ip < T->MaxTreeSize; ip++ ) { s[ip] = T->boomlijst[ip]; }
00114             if ( T->boomlijst ) M_free(T->boomlijst,"InsTableTree");
00115             T->boomlijst = s;
00116             T->MaxTreeSize = is;
00117         }
00118     }
00119     boomlijst = T->boomlijst;
00120     q = boomlijst + T->rootnum;
00121     if ( q->right == -1 ) { /* First element */
00122         T->numtree++;
00123         s = boomlijst+T->numtree;
00124         q->right = T->numtree;
00125         s->parent = T->rootnum;
00126         s->left = s->right = -1;
00127         s->blnce = 0;
00128         s->value = tp - T->tablepointers;
00129         s->usage = 0;
00130         return(T->numtree);
00131     }
00132     ip = q->right;
00133     if ( T->numind >= 0 ) xstop = T->numind;
00134     else xstop = *tp + 1;
00135     while ( ip >= 0 ) {
00136         p = boomlijst + ip;
00137         v1 = T->tablepointers + p->value;
00138         v2 = tp; v3 = tp + xstop;
00139         while ( *v1 == *v2 && v2 < v3 ) { v1++; v2++; }
00140         if ( v2 >= v3 ) return(-p->value);
00141         if ( *v1 > *v2 ) {
00142             iq = p->right;
00143             if ( iq >= 0 ) { ip = iq; }
00144             else {
00145                 T->numtree++;
00146                 is = T->numtree;
00147                 p->right = is;
00148                 s = boomlijst + is;
00149                 s->parent = ip; s->left = s->right = -1;
00150                 s->blnce = 0; s->value = tp - T->tablepointers;
00151                 s->usage = 0;
00152                 p->blnce++;
00153                 if ( p->blnce == 0 ) return(T->numtree);
00154                 goto balance;
00155             }
00156         }
00157         else if ( *v1 < *v2 ) {

```

```

00158         iq = p->left;
00159         if ( iq >= 0 ) { ip = iq; }
00160         else {
00161             T->numtree++;
00162             is = T->numtree;
00163             s = boomlijst+is;
00164             p->left = is;
00165             s->parent = ip; s->left = s->right = -1;
00166             s->blnce = 0; s->value = tp - T->tablepointers;
00167             s->usage = 0;
00168             p->blnce--;
00169             if ( p->blnce == 0 ) return(T->numtree);
00170             goto balance;
00171         }
00172     }
00173 }
00174 MesPrint("Serious problems in InsTableTree!\n");
00175 Terminate(-1);
00176 return(0);
00177 balance:;
00178 for (;;) {
00179     p = boomlijst + ip;
00180     iq = p->parent;
00181     if ( iq == T->rootnum ) break;
00182     q = boomlijst + iq;
00183     if ( ip == q->left ) q->blnce--;
00184     else q->blnce++;
00185     if ( q->blnce == 0 ) break;
00186     if ( q->blnce == -2 ) {
00187         if ( p->blnce == -1 ) { /* single rotation */
00188             q->left = p->right;
00189             p->right = iq;
00190             p->parent = q->parent;
00191             q->parent = ip;
00192             if ( boomlijst[p->parent].left == iq ) boomlijst[p->parent].left = ip;
00193             else boomlijst[p->parent].right = ip;
00194             if ( q->left >= 0 ) boomlijst[q->left].parent = iq;
00195             q->blnce = p->blnce = 0;
00196         }
00197         else { /* double rotation */
00198             s = boomlijst + is;
00199             q->left = s->right;
00200             p->right = s->left;
00201             s->right = iq;
00202             s->left = ip;
00203             if ( p->right >= 0 ) boomlijst[p->right].parent = ip;
00204             if ( q->left >= 0 ) boomlijst[q->left].parent = iq;
00205             s->parent = q->parent;
00206             q->parent = is;
00207             p->parent = is;
00208             if ( boomlijst[s->parent].left == iq )
00209                 boomlijst[s->parent].left = is;
00210             else boomlijst[s->parent].right = is;
00211             if ( s->blnce > 0 ) { q->blnce = s->blnce = 0; p->blnce = -1; }
00212             else if ( s->blnce < 0 ) { p->blnce = s->blnce = 0; q->blnce = 1; }
00213             else { p->blnce = s->blnce = q->blnce = 0; }
00214         }
00215         break;
00216     }
00217     else if ( q->blnce == 2 ) {
00218         if ( p->blnce == 1 ) { /* single rotation */
00219             q->right = p->left;
00220             p->left = iq;
00221             p->parent = q->parent;
00222             q->parent = ip;
00223             if ( boomlijst[p->parent].left == iq ) boomlijst[p->parent].left = ip;
00224             else boomlijst[p->parent].right = ip;
00225             if ( q->right >= 0 ) boomlijst[q->right].parent = iq;
00226             q->blnce = p->blnce = 0;
00227         }
00228         else { /* double rotation */
00229             s = boomlijst + is;
00230             q->right = s->left;
00231             p->left = s->right;
00232             s->left = iq;
00233             s->right = ip;
00234             if ( p->left >= 0 ) boomlijst[p->left].parent = ip;
00235             if ( q->right >= 0 ) boomlijst[q->right].parent = iq;
00236             s->parent = q->parent;
00237             q->parent = is;
00238             p->parent = is;
00239             if ( boomlijst[s->parent].left == iq ) boomlijst[s->parent].left = is;
00240             else boomlijst[s->parent].right = is;
00241             if ( s->blnce < 0 ) { q->blnce = s->blnce = 0; p->blnce = 1; }
00242             else if ( s->blnce > 0 ) { p->blnce = s->blnce = 0; q->blnce = -1; }
00243             else { p->blnce = s->blnce = q->blnce = 0; }
00244         }
00245     }

```

```

00245         break;
00246     }
00247     is = ip; ip = iq;
00248 }
00249 return(T->numtree);
00250 }
00251
00252 /*
00253 #] InsTableTree :
00254 #[ RedoTableTree :
00255
00256     To be used when a sparse table is trimmed due to a .store
00257     We rebuild the tree. In the future one could try to become faster
00258     at the cost of quite some complexity.
00259     We need to keep the first 'size' elements in the boomlijst.
00260     Kill all others and reconstruct the tree with the original ordering.
00261     This is very complicated! Because .store will either keep the whole
00262     table or remove the whole table we should not come here often.
00263     Hence we choose the slow solution for now.
00264 */
00265
00266 void RedoTableTree(TABLES T, int newsz)
00267 {
00268     WORD *tp;
00269     int i;
00270     ClearTableTree(T);
00271     for ( i = 0, tp = T->tablepointers; i < newsz; i++ ) {
00272         InsTableTree(T, tp);
00273         tp += ABS(T->numind)+TABLEEXTENSION;
00274     }
00275 }
00276
00277 /*
00278 #] RedoTableTree :
00279 #[ FindTableTree :
00280
00281 int FindTableTree(TABLES T, WORD *, arglist, int, inc)
00282     Searches for the element specified by the list of arguments.
00283     If found, it returns the offset in T->tablepointers
00284     If not found, it will return -1
00285     The list here is from the list of function arguments. Hence it
00286     has pairs of numbers -SNUMBER, index
00287     Actually inc says how many numbers there are and the above case is
00288     for inc = 2. For inc = 1 we have just a list of indices.
00289 */
00290
00291 int FindTableTree(TABLES T, WORD *tp, int inc)
00292 {
00293     COMPTREE *boomlijst = T->boomlijst, *q = boomlijst + T->rootnum, *p;
00294     WORD *v1, *v2, *v3, xstop;
00295     int ip, iq;
00296     if ( q->right == -1 ) return(-1);
00297     ip = q->right;
00298     if ( inc > 1 ) tp += inc-1;
00299     if ( T->numind >= 0 ) xstop = T->numind;
00300     else { /* We have to read the number of arguments first */
00301         if ( *tp <= 0 ) return(-1); /* Cannot be! */
00302         xstop = *tp+1;
00303     }
00304     while ( ip >= 0 ) {
00305         p = boomlijst + ip;
00306         v1 = T->tablepointers + p->value;
00307         v2 = tp; v3 = v1 + xstop;
00308         while ( *v1 == *v2 && v1 < v3 ) { v1++; v2 += inc; }
00309         if ( v1 == v3 ) {
00310             p->usage++;
00311             return(p->value);
00312         }
00313         if ( *v1 > *v2 ) {
00314             iq = p->right;
00315             if ( iq >= 0 ) { ip = iq; }
00316             else return(-1);
00317         }
00318         else if ( *v1 < *v2 ) {
00319             iq = p->left;
00320             if ( iq >= 0 ) { ip = iq; }
00321             else return(-1);
00322         }
00323     }
00324     MesPrint("Serious problems in FindTableTree\n");
00325     Terminate(-1);
00326     return(-1);
00327 }
00328
00329 /*
00330 #] FindTableTree :
00331 #[ DoTableExpansion :

```

```

00332 */
00333
00334 int DoTableExpansion(WORD *term, WORD level)
00335 {
00336     GETIDENTITY
00337     WORD *t, *tstop, *stopper, *termout, *m, *mm, *tp, *r, xx;
00338     WORD numsubexp, numbuf;
00339     TABLES T = 0;
00340     int i, j, num;
00341     AN.TeInFun = AR.TePos = 0;
00342     tstop = term + *term;
00343     stopper = tstop - ABS(tstop[-1]);
00344     t = term+1;
00345     while ( t < stopper ) {
00346         if ( *t != TABLEFUNCTION ) { t += t[1]; continue; }
00347         if ( t[FUNHEAD] > -FUNCTION ) { t += t[1]; continue; }
00348         T = functions[-t[FUNHEAD]-FUNCTION].tabl;
00349         if ( T == 0 ) { t += t[1]; continue; }
00350         if ( T->sparse ) T = T->sparse;
00351         if ( t[1] == FUNHEAD+2 && t[FUNHEAD+1] <= -FUNCTION ) break;
00352         if ( t[1] < FUNHEAD+1+2*ABS(T->numind) ) { t += t[1]; continue; }
00353         for ( i = 0; i < ABS(T->numind); i++ ) {
00354             if ( t[FUNHEAD+1+2*i] != -SYMBOL ) break;
00355         }
00356         if ( i >= ABS(T->numind) ) break;
00357         t += t[1];
00358     }
00359     if ( t >= stopper ) {
00360         MesPrint("Internal error: Missing table_ function");
00361         Terminate(-1);
00362     }
00363     /*
00364     Table in T. Now collect the numbers of the symbols;
00365     */
00366     termout = AT.WorkPointer;
00367     if ( T->sparse ) {
00368         for ( i = 0; i < T->totind; i++ ) {
00369             /*
00370             Loop over all table elements
00371             */
00372             m = termout + 1; mm = term + 1;
00373             while ( mm < t ) *m++ = *mm++;
00374             r = m;
00375             if ( t[1] == FUNHEAD+2 && t[FUNHEAD+1] <= -FUNCTION ) {
00376                 *m++ = -t[FUNHEAD+1];
00377                 tp = T->tablepointers + (ABS(T->numind)+TABLEEXTENSION)*i;
00378                 if ( T->numind < 0 ) {
00379                     xx = tp[0]+1;
00380                     *m++ = FUNHEAD+xx*2;
00381                     for ( j = 2; j < FUNHEAD; j++ ) *m++ = 0;
00382                     for ( j = 0; j < xx; j++ ) {
00383                         *m++ = -SNUMBER; *m++ = *tp++;
00384                     }
00385                 }
00386                 else {
00387                     *m++ = FUNHEAD+T->numind*2;
00388                     for ( j = 2; j < FUNHEAD; j++ ) *m++ = 0;
00389                     for ( j = 0; j < T->numind; j++ ) {
00390                         *m++ = -SNUMBER; *m++ = *tp++;
00391                     }
00392                 }
00393             }
00394             else if ( T->numind < 0 ) {
00395                 tp = T->tablepointers + (ABS(T->numind)+TABLEEXTENSION)*i;
00396                 xx = tp[0]+1;
00397                 *m++ = SYMBOL; *m++ = 2+xx*2; mm = t + FUNHEAD+1;
00398                 for ( j = 0; j < xx; j++, mm += 2, tp++ ) {
00399                     if ( *tp != 0 ) { *m++ = mm[1]; *m++ = *tp; }
00400                 }
00401                 r[1] = m-r;
00402                 if ( r[1] == 2 ) m = r;
00403             }
00404             else {
00405                 *m++ = SYMBOL; *m++ = 2+T->numind*2; mm = t + FUNHEAD+1;
00406                 tp = T->tablepointers + (T->numind+TABLEEXTENSION)*i;
00407                 for ( j = 0; j < T->numind; j++, mm += 2, tp++ ) {
00408                     if ( *tp != 0 ) { *m++ = mm[1]; *m++ = *tp; }
00409                 }
00410                 r[1] = m-r;
00411                 if ( r[1] == 2 ) m = r;
00412             }
00413             /*
00414             The next code replaces this old code
00415             */
00416             *m++ = SUBEXPRESSION;
00417             *m++ = SUBEXPSIZE;
00418             *m++ = *tp;

```

```

00419         *m++ = 1;
00420         *m++ = T->bufnum;
00421         FILLSUB(m);
00422         mm = t + t[1];
00423
00424         We had forgotten to take the parameters into account.
00425         Hence the subexpression prototype for wildcards was missed
00426         Now we slow things down a little bit, but we do not run
00427         any risks. There is still one problem. We have not checked
00428         that the prototype matches.
00429     */
00430     tp = T->tablepointers + (ABS(T->numind)+TABLEEXTENSION)*i
00431           +ABS(T->numind);
00432     numsubexp = tp[0]; numbuf = tp[1];
00433     r = m;
00434 #ifdef WITHPTHREADS
00435     tp = T->prototype[identity];
00436 #else
00437     tp = T->prototype;
00438 #endif
00439     for ( j = 0; j < tp[1]; j++ ) *m++ = tp[j];
00440     r[2] = numsubexp; r[4] = numbuf;
00441 /*
00442     r = m;
00443     tp = T->tablepointers + (ABS(T->numind)+TABLEEXTENSION)*i;
00444     *m++ = -t[FUNHEAD];
00445     if ( T->numind < 0 ) {
00446         xx = tp[0]+1;
00447         *m++ = t[1] - xx - T->numind - 1;
00448     }
00449     else {
00450         xx = T->numind;
00451         *m++ = t[1] - 1;
00452     }
00453     for ( j = 2; j < FUNHEAD; j++ ) *m++ = t[j];
00454     for ( j = 0; j < xx; j++ ) {
00455         *m++ = -SNUMBER; *m++ = *tp++;
00456     }
00457     tp = t + FUNHEAD + 1 + 2*T->numind;
00458     mm = t + t[1];
00459     while ( tp < mm ) *m++ = *tp++;
00460     r[1] = m-r;
00461 */
00462 /*
00463     From now on is old code
00464 */
00465     mm = t + t[1];
00466     while ( mm < tstop ) *m++ = *mm++;
00467     *termout = m - termout;
00468     AT.WorkPointer = m;
00469     if ( Generator(BHEAD termout,level) ) {
00470         MesCall("DoTableExpand");
00471         return(-1);
00472     }
00473     AT.WorkPointer = termout;
00474 }
00475 }
00476 else {
00477     for ( i = 0; i < T->totind; i++ ) {
00478 #if TABLEEXTENSION == 2
00479         if ( T->tablepointers[i] < 0 ) continue;
00480 #else
00481         if ( T->tablepointers[TABLEEXTENSION*i] < 0 ) continue;
00482 #endif
00483         m = termout + 1; mm = term + 1;
00484         while ( mm < t ) *m++ = *mm++;
00485         r = m;
00486         if ( t[1] == FUNHEAD+2 && t[FUNHEAD+1] <= -FUNCTION ) {
00487             *m++ = -t[FUNHEAD+1];
00488             *m++ = FUNHEAD+T->numind*2;
00489             for ( j = 2; j < FUNHEAD; j++ ) *m++ = 0;
00490             tp = T->tablepointers + (T->numind+TABLEEXTENSION)*i;
00491             for ( j = 0; j < T->numind; j++ ) {
00492                 if ( j > 0 ) {
00493                     num = T->mm[j].mini + ( i % T->mm[j-1].size ) / T->mm[j].size;
00494                 }
00495                 else {
00496                     num = T->mm[j].mini + i / T->mm[j].size;
00497                 }
00498                 *m++ = -SNUMBER; *m++ = num;
00499             }
00500         }
00501         else {
00502             *m++ = SYMBOL; *m++ = 2+T->numind*2; mm = t + FUNHEAD+1;
00503             for ( j = 0; j < T->numind; j++, mm += 2 ) {
00504                 if ( j > 0 ) {
00505                     num = T->mm[j].mini + ( i % T->mm[j-1].size ) / T->mm[j].size;

```

```

00506         }
00507         else {
00508             num = T->mm[j].mini + i / T->mm[j].size;
00509         }
00510         if ( num != 0 ) { *m++ = mm[1]; *m++ = num; }
00511     }
00512     r[1] = m-r;
00513     if ( r[1] == 2 ) m = r;
00514 }
00515 /*
00516     The next code replaces this old code
00517
00518     *m++ = SUBEXPRESSION;
00519     *m++ = SUBEXPSIZE;
00520     *m++ = *tp;
00521     *m++ = 1;
00522     *m++ = T->bufnum;
00523     FILLSUB(m);
00524     mm = t + t[1];
00525
00526     We had forgotten to take the parameters into account.
00527     Hence the subexpression prototype for wildcards was missed
00528     Now we slow things down a little bit, but we do not run
00529     any risks. There is still one problem. We have not checked
00530     that the prototype matches.
00531 */
00532     r = m;
00533     *m++ = -t[FUNHEAD];
00534     *m++ = t[1] - 1;
00535     for ( j = 2; j < FUNHEAD; j++ ) *m++ = t[j];
00536     for ( j = 0; j < T->numind; j++ ) {
00537         if ( j > 0 ) {
00538             num = T->mm[j].mini + ( i % T->mm[j-1].size ) / T->mm[j].size;
00539         }
00540         else {
00541             num = T->mm[j].mini + i / T->mm[j].size;
00542         }
00543         *m++ = -SNUMBER; *m++ = num;
00544     }
00545     tp = t + FUNHEAD + 1 + 2*T->numind;
00546     mm = t + t[1];
00547     while ( tp < mm ) *m++ = *tp++;
00548     r[1] = m - r;
00549 /*
00550     From now on is old code
00551 */
00552     while ( mm < tstop ) *m++ = *mm++;
00553     *termout = m - termout;
00554     AT.WorkPointer = m;
00555     if ( Generator(BHEAD termout, level) ) {
00556         MesCall("DoTableExpand");
00557         return(-1);
00558     }
00559 }
00560 }
00561 return(0);
00562 }
00563
00564 /*
00565 #] DoTableExpansion :
00566 #[ TableBase :
00567
00568 File with all the database related things.
00569 We have the routines for the generic database command
00570 TableBase,options;
00571 TB,options;
00572 Options are:
00573     Open "File.tbl";           Open for R/W
00574     Open "File.tbl", readonly; Open for R
00575     Create "File.tbl";         Create for write
00576     Load "File.tbl", tablename; Loads stubs of table
00577     Load "File.tbl";           Loads stubs of all tables
00578     Enter "File.tbl", tablename; Loads whole table
00579     Enter "File.tbl";          Loads all tables
00580     Audit "File.tbl", options; Print list of contents
00581     Replace "File.tbl", tablename; Saves a table (with overwrite)
00582     Replace "File.tbl", table element; Saves a table element "
00583     Cleanup "File.tbl";        Makes tables contingent
00584     AddTo "File.tbl" tablename; Add if not yet there.
00585     AddTo "File.tbl" table element; Add if not yet there.
00586     Delete "File.tbl" tablename;
00587     Delete "File.tbl" table element;
00588
00589     On/Off substitute;
00590     On/Off compress "File.tbl";
00591     id tbl_(f?,?a) = f(?a);
00592     When a tbl_ is used, automatically the corresponding element is compiled

```



```

00593     at the start of the next module.
00594     if TB,On,substitute [tablename], use of table RHS (if loaded)
00595     if TB,Off,substitute [tablename], use of tbl_(table,...);
00596
00597
00598     Still needed: Something like OverLoad to allow loading parts of a table
00599     from more than one file. Date stamps needed? In that case we need a touch
00600     command as well.
00601
00602     If we put all our diagrams inside, we have to go outside the concept
00603     of tables.
00604
00605     #] TableBase :
00606     #[ CoTableBase :
00607
00608     To be followed by ,subkey
00609 */
00610 static KEYWORD tboptions[] = {
00611     {"addto",          (TFUN)CoTBaddto,      0,    PARTEST}
00612     ,{"audit",         (TFUN)CoTBaudit,      0,    PARTEST}
00613     ,{"cleanup",       (TFUN)CoTbcleanup,    0,    PARTEST}
00614     ,{"create",        (TFUN)CoTBcreate,     0,    PARTEST}
00615     ,{"enter",         (TFUN)CoTBenter,      0,    PARTEST}
00616     ,{"help",          (TFUN)CoTBhelp,       0,    PARTEST}
00617     ,{"load",          (TFUN)CoTBload,       0,    PARTEST}
00618     ,{"off",           (TFUN)CoTBoff,        0,    PARTEST}
00619     ,{"on",            (TFUN)CoTBon,         0,    PARTEST}
00620     ,{"open",          (TFUN)CoTBopen,       0,    PARTEST}
00621     ,{"replace",       (TFUN)CoTBreplace,    0,    PARTEST}
00622     ,{"use",           (TFUN)CoTBuse,        0,    PARTEST}
00623 };
00624
00625 static UBYTE *tablebasename = 0;
00626
00627 int CoTableBase(UBYTE *s)
00628 {
00629     UBYTE *option, c, *t;
00630     int i,optlistsize = sizeof(tboptions)/sizeof(KEYWORD), error = 0;
00631     while ( *s == ' ' ) s++;
00632     if ( *s != '"' ) {
00633         if ( ( tolower(*s) == 'h' ) && ( tolower(s[1]) == 'e' )
00634             && ( tolower(s[2]) == 'l' ) && ( tolower(s[3]) == 'p' )
00635             && ( FG.cTable[s[4]] > 1 ) ) {
00636             CoTBhelp(s);
00637             return(0);
00638         }
00639         proper::;
00640         MesPrint("&Proper syntax: TableBase \"filename\" options");
00641         return(1);
00642     }
00643     s++; tablebasename = s;
00644     while ( *s && *s != '"' ) s++;
00645     if ( *s != '"' ) goto proper;
00646     t = s; s++; *t = 0;
00647     while ( *s == ' ' || *s == '\\t' || *s == ',' ) s++;
00648     option = s;
00649     while ( FG.cTable[*s] == 0 ) s++;
00650     c = *s; *s = 0;
00651     for ( i = 0; i < optlistsize; i++ ) {
00652         if ( StrICmp(option, (UBYTE *) (tboptions[i].name)) == 0 ) {
00653             *s = c;
00654             while ( *s == ',' ) s++;
00655             error = (tboptions[i].func)(s);
00656             *t = '"';
00657             return(error);
00658         }
00659     }
00660     MesPrint("&Unrecognized option %s in TableBase statement",option);
00661     return(1);
00662 }
00663
00664 /*
00665     #] CoTableBase :
00666     #[ FlipTable :
00667
00668     Flips the table between use as 'stub' and regular use
00669 */
00670
00671 int FlipTable(FUNCTIONS f, int type)
00672 {
00673     TABLES T, TT;
00674     T = f->tabl;
00675     if ( ( TT = T->spare ) == 0 ) {
00676         MesPrint("Error: trying to change mode on a table that has no tablebase");
00677         return(-1);
00678     }
00679     if ( TT->mode == type ) f->tabl = TT;

```

```

00680     return(0);
00681 }
00682
00683 /*
00684 #] FlipTable :
00685 #[ SpareTable :
00686
00687     Creates a spare element for a table. This is used in the table bases.
00688     It is a (thus far) empty copy of the TT table.
00689     By using FlipTable we can switch between them and alter which version of
00690     a table we will be using. Note that this also causes some extra work in the
00691     ResetVariables and the Globalize routines.
00692 */
00693
00694 int SpareTable(TABLES TT)
00695 {
00696     TABLES T;
00697     T = (TABLES)Malloc1(sizeof(struct TableEs),"table");
00698     T->defined = T->mdefined = 0; T->sparse = TT->sparse; T->mm = 0; T->flags = 0;
00699     T->numtree = 0; T->rootnum = 0; T->MaxTreeSize = 0;
00700     T->boomlijst = 0;
00701     T->strict = TT->strict;
00702     T->bounds = TT->bounds;
00703     T->bufnum = inicbufs();
00704     T->argtail = TT->argtail;
00705     T->spare = TT;
00706     T->bufferssize = 8;
00707     T->buffers = (WORD *)Malloc1(sizeof(WORD)*T->bufferssize,"SpareTable buffers");
00708     T->buffersfill = 0;
00709     T->buffers[T->buffersfill++] = T->bufnum;
00710     T->mode = 0;
00711     T->numind = TT->numind;
00712     T->totind = 0;
00713     T->prototype = TT->prototype;
00714     T->pattern = TT->pattern;
00715     T->tablepointers = 0;
00716     T->reserved = 0;
00717     T->tablenum = 0;
00718     T->numdummies = 0;
00719     T->mm = (MINMAX *)Malloc1(ABS(T->numind)*sizeof(MINMAX),"table dimensions");
00720     T->flags = (WORD *)Malloc1(ABS(T->numind)*sizeof(WORD),"table flags");
00721     ClearTableTree(T);
00722     TT->spare = T;
00723     TT->mode = 1;
00724     return(0);
00725 }
00726
00727 /*
00728 #] SpareTable :
00729 #[ FindTB :
00730
00731     Looks for a tablebase with the given name in the active tablebases.
00732 */
00733
00734 DBASE *FindTB(UBYTE *name)
00735 {
00736     DBASE *d;
00737     int i;
00738     for ( i = 0; i < NumTableBases; i++ ) {
00739         d = tablebases+i;
00740         if ( d->name && ( StrCmp(name,(UBYTE *) (d->name)) == 0 ) ) { return(d); }
00741     }
00742     return(0);
00743 }
00744
00745 /*
00746 #] FindTB :
00747 #[ CoTBcreate :
00748
00749     Creates a new tablebase.
00750     Error is when there is already an active tablebase by this name.
00751     If a file with the given name exists already, but it does not correspond
00752     to an active table base, its contents will be lost.
00753     Note that tablebasename is a static variable, defined in CoTableBase
00754 */
00755
00756 int CoTBcreate(UBYTE *s)
00757 {
00758     DUMMYUSE(s);
00759     if ( FindTB(tablebasename) != 0 ) {
00760         MesPrint("&There is already an open TableBase with the name %s",tablebasename);
00761         return(-1);
00762     }
00763     NewDbase((char *)tablebasename,0);
00764     return(0);
00765 }
00766

```

```

00767 /*
00768 #] CoTBcreate :
00769 #[ CoTBopen :
00770 */
00771
00772 int CoTBopen(UBYTE *s)
00773 {
00774     DBASE *d;
00775     MLONG rw = 1;
00776
00777     SkipSpaces(&s);
00778
00779     if ( *s ) {
00780         if ( ConsumeOption(&s,"readonly") != 0 ) {
00781             rw = 0;
00782         } else {
00783             MesPrint("&Invalid option for TableBase open: %s, ignoring", s);
00784         }
00785     }
00786
00787     if ( ( d = FindTB(tablebasename) ) != 0 ) {
00788         MesPrint("&There is already an open TableBase with the name %s",tablebasename);
00789         return(-1);
00790     }
00791     d = GetDbase((char *)tablebasename, rw);
00792     if ( CheckTableDeclarations(d) ) return(-1);
00793     return(0);
00794 }
00795
00796 /*
00797 #] CoTBopen :
00798 #[ CoTBaddto :
00799 */
00800
00801 int CoTBaddto(UBYTE *s)
00802 {
00803     GETIDENTITY
00804     DBASE *d;
00805     UBYTE *tablename, c, *t, elementstring[ELEMENTSIZE+20], *ss, *es;
00806     WORD type, funnum, lbrac, first, num, *expr, *w;
00807     TABLES T = 0;
00808     MLONG basenumber;
00809     LONG x;
00810     int i, j, error = 0, sum;
00811     if ( ( d = FindTB(tablebasename) ) == 0 ) {
00812         MesPrint("&No open tablebase with the name %s",tablebasename);
00813         return(-1);
00814     }
00815
00816     if ( ( d->rwmode ) == 0 ) {
00817         MesPrint("&Tablebase with the name %s opened in read only mode",tablebasename);
00818         return(-1);
00819     }
00820     AO.DollarOutSizeBuffer = 32;
00821     AO.DollarOutBuffer = (UBYTE *)Malloc1(AO.DollarOutSizeBuffer,
00822         "TableOutBuffer");
00823
00824     /*
00825     Now loop through the names and start adding
00826     */
00827     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00828     while ( *s ) {
00829         tablename = s;
00830         if ( ( s = SkipAName(s) ) == 0 ) goto tableabort;
00831         c = *s; *s = 0;
00832         if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
00833             || ( T = functions[funnum].tabl ) == 0 ) {
00834             MesPrint("&%s should be a previously declared table",tablename);
00835             *s = c; goto tableabort;
00836         }
00837         if ( T->sparse == 0 ) {
00838             MesPrint("&%s should be a sparse table",tablename);
00839             *s = c; goto tableabort;
00840         }
00841         basenumber = AddTableName(d,(char *)tablename,T);
00842         if ( T->sparse && ( T->mode == 1 ) ) T = T->sparse;
00843         if ( basenumber < 0 ) basenumber = -basenumber;
00844         else if ( basenumber == 0 ) { *s = c; goto tableabort; }
00845         *s = c;
00846         if ( *s == '(' ) { /* Addition of single element */
00847             s++; es = s;
00848             for ( i = 0, w = AT.WorkPointer; i < ABS(T->numind); i++ ) {
00849                 ParseSignedNumber(x,s);
00850                 if ( FG.cTable[s[-1]] != 1 || ( *s != ',' && *s != ')' ) ) {
00851                     MesPrint("&Table arguments in TableBase addto statement should be numbers");
00852                     return(1);
00853                 }
00854             }
00855             *w++ = x;

```

```

00854         if ( *s == ' ' ) break;
00855         s++;
00856     }
00857     if ( *s != ' ' || i < ( ABS(T->numind) - 1 ) ) {
00858         MesPrint("&Incorrect number of table arguments in TableBase addto statement. Should be
%d"
00859             ,ABS(T->numind));
00860         error = 1;
00861     }
00862     c = *s; *s = 0;
00863     i = FindTableTree(T,AT.WorkPointer,1);
00864     if ( i < 0 ) {
00865         MesPrint("&Element %s has not been defined",es);
00866         error = 1;
00867         *s++ = c;
00868     }
00869     else if ( ExistsObject(d,basenumber,(char *)es) ) {}
00870     else {
00871         int dict = AO.CurrentDictionary;
00872         AO.CurrentDictionary = 0;
00873         sum = i + ABS(T->numind);
00874         /*
00875             See also commentary below
00876         */
00877         AO.DollarInOutBuffer = 1;
00878         AO.PrintType = 1;
00879         ss = AO.DollarOutBuffer;
00880         *ss = 0;
00881         AO.OutInBuffer = 1;
00882         #if ( TABLEEXTENSION == 2 )
00883             expr = cbuf[T->bufnum].rhs[T->tablepointers[sum]];
00884         #else
00885             expr = cbuf[T->tablepointers[sum+1]].rhs[T->tablepointers[sum]];
00886         #endif
00887         lbrac = 0; first = 0;
00888         while ( *expr ) {
00889             if ( WriteTerm(expr,&lbrac,first,PRINTON,0) ) {
00890                 error = 1; break;
00891             }
00892             expr += *expr;
00893         }
00894         AO.OutInBuffer = 0;
00895         AddObject(d,basenumber,(char *)es,(char *) (AO.DollarOutBuffer));
00896         *s++ = c;
00897         AO.CurrentDictionary = dict;
00898     }
00899 }
00900 else {
00901     /*
00902         Now we have to start looping through all defined elements of this table.
00903         We have to construct the arguments in text format.
00904     */
00905     for ( i = 0; i < T->totind; i++ ) {
00906         #if ( TABLEEXTENSION == 2 )
00907             if ( !T->sparse && T->tablepointers[i] < 0 ) continue;
00908         #else
00909             if ( !T->sparse && T->tablepointers[TABLEEXTENSION+i] < 0 ) continue;
00910         #endif
00911         sum = i * ( ABS(T->numind) + TABLEEXTENSION );
00912         t = elementstring;
00913         for ( j = 0; j < ABS(T->numind); j++, sum++ ) {
00914             if ( j > 0 ) *t++ = ',';
00915             num = T->tablepointers[sum];
00916             t = NumCopy(num,t);
00917             if ( ( t - elementstring ) >= ELEMENTSIZE ) {
00918                 MesPrint("&Table element specification takes more than %ld characters and cannot
be handled",
00919                     (MLONG) ELEMENTSIZE);
00920                 goto tableabort;
00921             }
00922         }
00923         if ( ExistsObject(d,basenumber,(char *)elementstring) ) { continue; }
00924         /*
00925             We have the number in basenumber and the element in elementstring.
00926             Now we need the rhs. We can use the code from WriteDollarToBuffer.
00927             Main complication: in the table compiler buffer there can be
00928             brackets. The dollars do not have those.....
00929         */
00930         AO.DollarInOutBuffer = 1;
00931         AO.PrintType = 1;
00932         ss = AO.DollarOutBuffer;
00933         *ss = 0;
00934         AO.OutInBuffer = 1;
00935         #if ( TABLEEXTENSION == 2 )
00936             expr = cbuf[T->bufnum].rhs[T->tablepointers[sum]];
00937         #else
00938             expr = cbuf[T->tablepointers[sum+1]].rhs[T->tablepointers[sum]];

```

```

00939 #endif
00940         lbrac = 0; first = 0;
00941         while ( *expr ) {
00942             if ( WriteTerm(expr,&lbrac,first,PRINTON,0) ) {
00943                 error = 1; break;
00944             }
00945             expr += *expr;
00946         }
00947         AO.OutInBuffer = 0;
00948         AddObject(d,basenumber, (char *)elementstring, (char *) (AO.DollarOutBuffer));
00949     }
00950 }
00951 while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00952 }
00953 if ( WriteIniInfo(d) ) goto tableabort;
00954 M_free(AO.DollarOutBuffer,"DollarOutBuffer");
00955 AO.DollarOutBuffer = 0;
00956 AO.DollarOutSizeBuffer = 0;
00957 return(error);
00958 tableabort:;
00959 M_free(AO.DollarOutBuffer,"DollarOutBuffer");
00960 AO.DollarOutBuffer = 0;
00961 AO.DollarOutSizeBuffer = 0;
00962 AO.OutInBuffer = 0;
00963 return(1);
00964 }
00965
00966 /*
00967 #] CoTBaddto :
00968 #[ CoTBenter :
00969
00970 Loads the elements of the tables specified into memory and sends them
00971 one by one to the compiler as Fill statements.
00972 */
00973
00974 int CoTBenter(UBYTE *s)
00975 {
00976     DBASE *d;
00977     MLONG basenumber;
00978     UBYTE *arguments, *rhs, *buffer, *t, *u, c, *tablename;
00979     LONG size;
00980     int i, j, error = 0, error1 = 0, printall = 0;
00981     TABLES T = 0;
00982     WORD type, funnum;
00983     int dict = AO.CurrentDictionary;
00984     AO.CurrentDictionary = 0;
00985     if ( ( d = FindTB(tablebasename) ) == 0 ) {
00986         MesPrint("&No open tablebase with the name %s, check for existence of file or try readonly
mode when opening.",tablebasename);
00987         error = -1;
00988         goto Endofall;
00989     }
00990     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00991     if ( *s == '!' ) { printall = 1; s++; }
00992     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
00993     if ( *s ) {
00994         while ( *s ) {
00995             tablename = s;
00996             if ( ( s = SkipAName(s) ) == 0 ) { error = 1; goto Endofall; }
00997             c = *s; *s = 0;
00998             if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
|| ( T = functions[funnum].tabl ) == 0 ) {
00999                 MesPrint("&%s should be a previously declared table",tablename);
01000                 basenumber = 0;
01001             }
01002             else if ( T->sparse == 0 ) {
01003                 MesPrint("&%s should be a sparse table",tablename);
01004                 basenumber = 0;
01005             }
01006             else { basenumber = GetTableName(d,(char *)tablename); }
01007             if ( T->sparse == 0 ) { SpareTable(T); }
01008             if ( basenumber > 0 ) {
01009                 for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01010                     for ( j = 0; j < NUMOBJECTS; j++ ) {
01011                         if ( basenumber != d->iblocks[i]->objects[j].tablename )
01012                             continue;
01013                         arguments = (UBYTE *) (d->iblocks[i]->objects[j].element);
01014                         rhs = (UBYTE *) ReadObject(d,basenumber, (char *)arguments);
01015                         if ( printall ) {
01016                             if ( rhs ) {
01017                                 MesPrint("%s(%s) = %s",tablename,arguments,rhs);
01018                             }
01019                             else {
01020                                 MesPrint("%s(%s) = 0",tablename,arguments);
01021                             }
01022                         }
01023                     }
01024                     if ( rhs ) {

```

```

01025         u = rhs; while ( *u ) u++;
01026         size = u-rhs;
01027         u = arguments; while ( *u ) u++;
01028         size += u-arguments;
01029         u = tablename; while ( *u ) u++;
01030         size += u-tablename;
01031         size += 6;
01032         buffer = (UBYTE *)Malloc1(size,"TableBase copy");
01033         t = tablename; u = buffer;
01034         while ( *t ) *u++ = *t++;
01035         *u++ = '(';
01036         t = arguments;
01037         while ( *t ) *u++ = *t++;
01038         *u++ = ')'; *u++ = '=';
01039         t = rhs;
01040         while ( *t ) *u++ = *t++;
01041         if ( t == rhs ) *u++ = '0';
01042         *u++ = 0; *u = 0;
01043         M_free(rhs,"rhs in TBenter");
01044
01045         error1 = CoFill(buffer);
01046
01047         if ( error1 < 0 ) goto Endofall;
01048         if ( error1 != 0 ) error = error1;
01049         M_free(buffer,"TableBase copy");
01050     }
01051 }
01052 }
01053 }
01054 *s = c;
01055 while ( *s == ',' || *s == ' ' || *s == '\\t' ) s++;
01056 }
01057 }
01058 else {
01059     s = (UBYTE *) (d->tablenames); basenumber = 0;
01060     while ( *s ) {
01061         basenumber++;
01062         tablename = s; while ( *s ) s++; s++;
01063         while ( *s ) s++;
01064         s++;
01065         if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01066             || ( T = functions[funnum].tabl ) == 0 ) {
01067             MesPrint("%s should be a previously declared table",tablename);
01068         }
01069         else if ( T->sparse == 0 ) {
01070             MesPrint("%s should be a sparse table",tablename);
01071         }
01072         if ( T->sparse == 0 ) { SpareTable(T); }
01073         for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01074             for ( j = 0; j < NUMOBJECTS; j++ ) {
01075                 if ( d->iblocks[i]->objects[j].tablenumber == basenumber ) {
01076                     arguments = (UBYTE *) (d->iblocks[i]->objects[j].element);
01077                     rhs = (UBYTE *) ReadObject(d,basenumber,(char *)arguments);
01078                     if ( printall ) {
01079                         if ( rhs ) {
01080                             MesPrint("%s%s = %s",tablename,arguments,rhs);
01081                         }
01082                         else {
01083                             MesPrint("%s%s = 0",tablename,arguments);
01084                         }
01085                     }
01086                     if ( rhs ) {
01087                         u = rhs; while ( *u ) u++;
01088                         size = u-rhs;
01089                         u = arguments; while ( *u ) u++;
01090                         size += u-arguments;
01091                         u = tablename; while ( *u ) u++;
01092                         size += u-tablename;
01093                         size += 6;
01094                         buffer = (UBYTE *) Malloc1(size,"TableBase copy");
01095                         t = tablename; u = buffer;
01096                         while ( *t ) *u++ = *t++;
01097                         *u++ = '(';
01098                         t = arguments;
01099                         while ( *t ) *u++ = *t++;
01100                         *u++ = ')'; *u++ = '=';
01101                         t = rhs;
01102                         while ( *t ) *u++ = *t++;
01103                         if ( t == rhs ) *u++ = '0';
01104                         *u++ = 0; *u = 0;
01105                         M_free(rhs,"rhs in TBenter");
01106
01107                         error1 = CoFill(buffer);
01108
01109                         if ( error1 < 0 ) goto Endofall;
01110                         if ( error1 != 0 ) error = error1;
01111                         M_free(buffer,"TableBase copy");

```

```

01112     }
01113     }
01114     }
01115     }
01116     }
01117 }
01118 Endofall;;
01119 AO.CurrentDictionary = dict;
01120 return(error);
01121 }
01122
01123 /*
01124 #] CoTBenter :
01125 #[ CoTestUse :
01126
01127     Possibly to be followed by names of tables.
01128     We make an array of TABLES structs to be tested in AC.usedtables.
01129     Note: only sparse tables are allowed.
01130     No arguments means all tables.
01131 */
01132
01133 int CoTestUse(UBYTE *s)
01134 {
01135     GETIDENTITY
01136     UBYTE *tablename, c;
01137     WORD type, funnum, *w;
01138     TABLES T;
01139     int error = 0;
01140     w = AT.WorkPointer;
01141     *w++ = TYPETESTUSE; *w++ = 2;
01142     while ( *s ) {
01143         tablename = s;
01144         if ( ( s = SkipAName(s) ) == 0 ) return(1);
01145         c = *s; *s = 0;
01146         if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01147             || ( T = functions[funnum].tabl ) == 0 ) {
01148             MesPrint("&%s should be a previously declared table",tablename);
01149             error = 1;
01150         }
01151         else if ( T->sparse == 0 ) {
01152             MesPrint("&%s should be a sparse table",tablename);
01153             error = 1;
01154         }
01155         *w++ = funnum + FUNCTION;
01156         *s = c;
01157         while ( *s == ' ' || *s == ',' || *s == '\\t' ) s++;
01158     }
01159     AT.WorkPointer[1] = w - AT.WorkPointer;
01160 /*
01161     if ( AT.WorkPointer[1] > 2 ) {
01162         AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
01163     }
01164 */
01165     AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
01166     return(error);
01167 }
01168
01169 /*
01170 #] CoTestUse :
01171 #[ CheckTableDeclarations :
01172
01173     Checks that all tables in a tablebase have identical properties to
01174     possible previous declarations. If they have not been declared
01175     before, they are declared here.
01176 */
01177
01178 int CheckTableDeclarations(DBASE *d)
01179 {
01180     WORD type, funnum;
01181     UBYTE *s, *ss, *t, *command = 0;
01182     int k, error = 0, error1, i;
01183     TABLES T;
01184     LONG commandsize = 0;
01185
01186     s = (UBYTE *) (d->tablenames);
01187     for ( k = 0; k < d->topnumber; k++ ) {
01188         if ( GetVar(s,&type,&funnum,ANYTYPE,NOAUTO) == NAMENOTFOUND ) {
01189             /*
01190                 We have to declare the table
01191             */
01192             ss = s; i = 0; while ( *ss ) { ss++; i++; } /* name */
01193             ss++; while ( *ss ) { ss++; i++; } /* tail */
01194             if ( commandsize == 0 ) {
01195                 commandsize = i + 15;
01196                 if ( commandsize < 100 ) commandsize = 100;
01197             }
01198             if ( (i+11) > commandsize ) {

```

```

01199         if ( command ) { M_free(command,"table command"); command = 0; }
01200         commandsize = i+10;
01201     }
01202     if ( command == 0 ) {
01203         command = (UBYTE *)Malloc1(commandsize,"table command");
01204     }
01205     t = command; ss = tablebase; while ( *ss ) *t++ = *ss++;
01206     *t++ = ','; while ( *s ) *t++ = *s++;
01207     s++; while ( *s ) *t++ = *s++;
01208     *t++ = ')'; *t = 0; s++;
01209     error1 = DoTable(command,1);
01210     if ( error1 ) error = error1;
01211 }
01212 else if ( ( type != CFUNCTION )
01213         || ( ( T = functions[funnum].tabl ) == 0 )
01214         || ( T->sparse == 0 ) ) {
01215     MesPrint("%s has been declared previously, but not as a sparse table.",s);
01216     error = 1;
01217     while ( *s ) s++;
01218     s++;
01219     while ( *s ) s++;
01220     s++;
01221 }
01222 else {
01223 /*
01224     Test dimension and argtail. There should be an exact match.
01225     We are not going to rename arguments when reading the elements.
01226 */
01227     ss = s;
01228     while ( *s ) s++;
01229     s++;
01230     if ( StrCmp(s,T->argtail) ) {
01231         MesPrint("&Declaration of table %s in %s different from previous
declaration",ss,d->name);
01232         error = 1;
01233     }
01234     while ( *s ) s++;
01235     s++;
01236 }
01237 }
01238 if ( command ) { M_free(command,"table command"); }
01239 return(error);
01240 }
01241
01242 /*
01243 #] CheckTableDeclarations :
01244 #[ CoTBload :
01245
01246     Loads the table stubbs of the specified tables in the indicated
01247     tablebase. Syntax:
01248     TableBase "tablebasename.tbl" load [tablename(s)];
01249     If no tables are specified all tables are taken.
01250 */
01251
01252 int CoTBload(UBYTE *ss)
01253 {
01254     DBASE *d;
01255     UBYTE *s, *name, *t, *r, *command, *arguments, *tail;
01256     LONG commandsize;
01257     int num, cs, es, ns, ts, i, j, error = 0, error1;
01258     if ( ( d = FindTB(tablebasename) ) == 0 ) {
01259         MesPrint("&No open tablebase with the name %s",tablebasename);
01260         return(-1);
01261     }
01262     commandsize = 120;
01263     command = (UBYTE *)Malloc1(commandsize,"Fill command");
01264     AC.vetofilling = 1;
01265     if ( *ss ) {
01266         while ( *ss == ',' || *ss == ' ' || *ss == '\t' ) ss++;
01267         while ( *ss ) {
01268             name = ss; ss = SkipAName(ss); *ss = 0;
01269             s = (UBYTE *) (d->tablenames);
01270             num = 0; ns = 0;
01271             while ( *s ) {
01272                 num++;
01273                 if ( StrCmp(s,name) ) {
01274                     while ( *s ) s++;
01275                     s++;
01276                     while ( *s ) s++;
01277                     s++;
01278                     num++;
01279                     continue;
01280                 }
01281                 name = s; while ( *s ) s++; ns = s-name; s++;
01282                 tail = s; while ( *s ) s++; ts = s-tail; s++;
01283                 tail++; while ( FG.cTable[*tail] == 1 ) tail++;
01284 /*

```



```

01285         Go through all elements
01286     */
01287     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01288         for ( j = 0; j < NUMOBJECTS; j++ ) {
01289             if ( d->iblocks[i]->objects[j].tablename == num ) {
01290                 t = arguments = (UBYTE *) (d->iblocks[i]->objects[j].element);
01291                 while ( *t ) t++;
01292                 es = t - arguments;
01293                 cs = 2*es + 2*ns + ts + 10;
01294                 if ( cs > commandsize ) {
01295                     commandsize = 2*cs;
01296                     if ( command ) M_free(command,"Fill command");
01297                     command = (UBYTE *) Malloc1(commandsize,"Fill command");
01298                 }
01299                 r = command; t = name; while ( *t ) *r++ = *t++;
01300                 *r++ = '('; t = arguments; while ( *t ) *r++ = *t++;
01301                 *r++ = '='; *r++ = '='; *r++ = 't'; *r++ = 'b'; *r++ = 'l';
01302                 *r++ = '_'; *r++ = '('; t = name; while ( *t ) *r++ = *t++;
01303                 *r++ = ','; t = arguments; while ( *t ) *r++ = *t++;
01304                 t = tail; while ( *t ) {
01305                     if ( *t == '?' && r[-1] != ',' ) {
01306                         t++;
01307                         if ( FG.cTable[*t] == 0 || *t == '$' || *t == '[' ) {
01308                             t = SkipAName(t);
01309                             if ( *t == '[' ) {
01310                                 SKIPBRA1(t);
01311                             }
01312                         }
01313                         else if ( *t == '{' ) {
01314                             SKIPBRA2(t);
01315                         }
01316                         else if ( *t ) { *r++ = *t++; continue; }
01317                     }
01318                     else *r++ = *t++;
01319                 }
01320                 *r++ = ')'; *r = 0;
01321     /*
01322         Still to do: replacemode or no replacemode?
01323     */
01324         AC.vetotablebasefill = 1;
01325         error1 = CoFill(command);
01326         AC.vetotablebasefill = 0;
01327         if ( error1 < 0 ) goto finishup;
01328         if ( error1 != 0 ) error = error1;
01329     }
01330 }
01331 }
01332 break;
01333 }
01334 while ( *ss == ',' || *ss == ' ' || *ss == '\t' ) ss++;
01335 }
01336 }
01337 else { /* do all of them */
01338     s = (UBYTE *) (d->tablenames);
01339     num = 0; ns = 0;
01340     while ( *s ) {
01341         num++;
01342         name = s; while ( *s ) s++; ns = s-name; s++;
01343         tail = s; while ( *s ) s++; ts = s-tail; s++;
01344         tail++; while ( FG.cTable[*tail] == 1 ) tail++;
01345     /*
01346         Go through all elements
01347     */
01348     for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01349         for ( j = 0; j < NUMOBJECTS; j++ ) {
01350             if ( d->iblocks[i]->objects[j].tablename == num ) {
01351                 t = arguments = (UBYTE *) (d->iblocks[i]->objects[j].element);
01352                 while ( *t ) t++;
01353                 es = t - arguments;
01354                 cs = 2*es + 2*ns + ts + 10;
01355                 if ( cs > commandsize ) {
01356                     commandsize = 2*cs;
01357                     if ( command ) M_free(command,"Fill command");
01358                     command = (UBYTE *) Malloc1(commandsize,"Fill command");
01359                 }
01360                 r = command; t = name; while ( *t ) *r++ = *t++;
01361                 *r++ = '('; t = arguments; while ( *t ) *r++ = *t++;
01362                 *r++ = '='; *r++ = '='; *r++ = 't'; *r++ = 'b'; *r++ = 'l';
01363                 *r++ = '_'; *r++ = '('; t = name; while ( *t ) *r++ = *t++;
01364                 *r++ = ','; t = arguments; while ( *t ) *r++ = *t++;
01365                 t = tail; while ( *t ) {
01366                     if ( *t == '?' && r[-1] != ',' ) {
01367                         t++;
01368                         if ( FG.cTable[*t] == 0 || *t == '$' || *t == '[' ) {
01369                             t = SkipAName(t);
01370                             if ( *t == '[' ) {
01371                                 SKIPBRA1(t);

```

```

01372                                     }
01373                                     }
01374                                     else if ( *t == '{' ) {
01375                                         SKIPBRA2(t);
01376                                     }
01377                                     else if ( *t ) { *r++ = *t++; continue; }
01378                                     }
01379                                     else *r++ = *t++;
01380                                 }
01381                                 *r++ = ')'; *r = 0;
01382 /*
01383                                     Still to do: replacemode or no replacemode?
01384 */
01385                                     AC.vetotablebasefill = 1;
01386                                     error1 = CoFill(command);
01387                                     AC.vetotablebasefill = 0;
01388                                     if ( error1 < 0 ) goto finishup;
01389                                     if ( error1 != 0 ) error = error1;
01390                                 }
01391                            }
01392                        }
01393                    }
01394                }
01395            finishup;;
01396            AC.vetofilling = 0;
01397            if ( command ) M_free(command,"Fill command");
01398            return(error);
01399        }
01400
01401 /*
01402     #] CoTBlod :
01403     #[ TestUse :
01404
01405     Look for tbl_(tablename,arguments)
01406     if tablename is encountered, check first whether the element is in
01407     use already. If not, check in the tables in AC.usedtables.
01408     If the element is not there, add it to AC.usedtables.
01409
01410
01411     We need the arguments of TestUse to see for which tables it is to be done
01412 */
01413
01414 int TestUse(WORD *term, WORD level)
01415 {
01416     WORD *tstop, *t, *m, *tstart, tabnum;
01417     WORD *funs, numfuns;
01418     int error = 0;
01419     TABLES T;
01420     LONG i;
01421     CBUF *C = cbuf+AM.rbufnum;
01422     int isp;
01423
01424     numfuns = C->lhs[level][1] - 2;
01425     funs = C->lhs[level] + 2;
01426     GETSTOP(term,tstop);
01427     t = term+1;
01428     while ( t < tstop ) {
01429         if ( *t != TABLESTUB ) { t += t[1]; continue; }
01430         tstart = t;
01431         m = t + FUNHEAD;
01432         t += t[1];
01433         if ( *m >= -FUNCTION ) continue;
01434         tabnum = -*m;
01435         if ( ( T = functions[tabnum-FUNCTION].tabl ) == 0 ) continue;
01436         if ( T->sparse == 0 ) continue;
01437 /*
01438         Check whether we have to test this one
01439 */
01440         if ( numfuns > 0 ) {
01441             for ( i = 0; i < numfuns; i++ ) {
01442                 if ( tabnum == funs[i] ) break;
01443             }
01444             if ( i >= numfuns && numfuns > 0 ) continue;
01445         }
01446 /*
01447         Test whether the element has been defined already.
01448         If not, mark it as used.
01449         Note: we only allow sparse tables (for now)
01450 */
01451         m++;
01452         for ( i = 0; i < ABS(T->numind); i++, m += 2 ) {
01453             if ( m >= t || *m != -SNUMBER ) break;
01454         }
01455         if ( ( i == ABS(T->numind) ) &&
01456             ( ( isp = FindTableTree(T,tstart+FUNHEAD+1,2) ) >= 0 ) ) {
01457             if ( ( T->tablepointers[isp+ABS(T->numind)+4] & ELEMENTLOADED ) == 0 ) {
01458                 T->tablepointers[isp+ABS(T->numind)+4] |= ELEMENTUSED;

```

```

01459         }
01460     }
01461     else {
01462         MesPrint("TestUse: Encountered a table element inside tbl_ that does not correspond to a
tablebase element");
01463         error = -1;
01464     }
01465 }
01466 return(error);
01467 }
01468
01469 /*
01470 #] TestUse :
01471 #[ CoTBaudit :
01472 */
01473
01474 int CoTBaudit (UBYTE *s)
01475 {
01476     DBASE *d;
01477     UBYTE *name, *tail;
01478     int i, j, error = 0, num;
01479
01480     if ( ( d = FindTB(tablebasename) ) == 0 ) {
01481         MesPrint("&No open tablebase with the name %s",tablebasename);
01482         return(-1);
01483     }
01484     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01485     while ( *s ) {
01486         /*
01487             Get the options here
01488             They will mainly involve the sorting of the output.
01489         */
01490         s++;
01491     }
01492     s = (UBYTE *) (d->tablenames); num = 0;
01493     while ( *s ) {
01494         num++;
01495         name = s; while ( *s ) s++; s++;
01496         tail = s; while ( *s ) s++; s++;
01497         MesPrint("Table,sparse,%s%s",name,tail);
01498         for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01499             for ( j = 0; j < NUMOBJECTS; j++ ) {
01500                 if ( d->iblocks[i]->objects[j].tablenumber == num ) {
01501                     MesPrint("    %s(%s)",name,d->iblocks[i]->objects[j].element);
01502                 }
01503             }
01504         }
01505     }
01506     return(error);
01507 }
01508
01509 /*
01510 #] CoTBaudit :
01511 #[ CoTBon :
01512 */
01513
01514 int CoTBon (UBYTE *s)
01515 {
01516     DBASE *d;
01517     UBYTE *ss, c;
01518     int error = 0;
01519     if ( ( d = FindTB(tablebasename) ) == 0 ) {
01520         MesPrint("&No open tablebase with the name %s",tablebasename);
01521         return(-1);
01522     }
01523     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01524     while ( *s ) {
01525         ss = SkipAName(s);
01526         c = *ss; *ss = 0;
01527         if ( StrICmp(s,(UBYTE *) ("compress")) == 0 ) {
01528             d->mode &= ~NOCOMPRESS;
01529         }
01530         else {
01531             MesPrint("&subkey %s not defined in TableBase On statement");
01532             error = 1;
01533         }
01534         *ss = c; s = ss;
01535         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01536     }
01537     return(error);
01538 }
01539
01540 /*
01541 #] CoTBon :
01542 #[ CoTBoff :
01543 */
01544

```

```

01545 int CoTBoff(UBYTE *s)
01546 {
01547     DBASE *d;
01548     UBYTE *ss, c;
01549     int error = 0;
01550     if ( ( d = FindTB(tablebasename) ) == 0 ) {
01551         MesPrint("&No open tablebase with the name %s",tablebasename);
01552         return(-1);
01553     }
01554     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01555     while ( *s ) {
01556         ss = SkipAName(s);
01557         c = *ss; *ss = 0;
01558         if ( StrICmp(s,(UBYTE *)("compress")) == 0 ) {
01559             d->mode |= NOCOMPRESS;
01560         }
01561         else {
01562             MesPrint("&subkey %s not defined in TableBase Off statement");
01563             error = 1;
01564         }
01565         *ss = c; s = ss;
01566         while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01567     }
01568     return(error);
01569 }
01570
01571 /*
01572 #] CoTBoff :
01573 #[ CoTBcleanup :
01574 */
01575
01576 int CoTBcleanup(UBYTE *s)
01577 {
01578     DUMMYUSE(s);
01579     MesPrint("&TableBase Cleanup statement not yet implemented");
01580     return(1);
01581 }
01582
01583 /*
01584 #] CoTBcleanup :
01585 #[ CoTBreplace :
01586 */
01587
01588 int CoTBreplace(UBYTE *s)
01589 {
01590     DUMMYUSE(s);
01591     MesPrint("&TableBase Replace statement not yet implemented");
01592     return(1);
01593 }
01594
01595 /*
01596 #] CoTBreplace :
01597 #[ CoTBuse :
01598
01599 Here the actual table use as determined in TestUse causes the needed
01600 table elements to be loaded
01601 */
01602
01603 int CoTBuse(UBYTE *s)
01604 {
01605     GETIDENTITY
01606     DBASE *d;
01607     MLONG basenumber;
01608     UBYTE *arguments, *rhs, *buffer, *t, *u, c, *tablename, *p;
01609     LONG size, sum, x;
01610     int i, j, error = 0, error1 = 0, k;
01611     TABLES T = 0;
01612     WORD type, funnum, mode, *w;
01613     if ( ( d = FindTB(tablebasename) ) == 0 ) {
01614         MesPrint("&No open tablebase with the name %s",tablebasename);
01615         return(-1);
01616     }
01617     while ( *s == ',' || *s == ' ' || *s == '\t' ) s++;
01618     if ( *s ) {
01619         while ( *s ) {
01620             tablename = s;
01621             if ( ( s = SkipAName(s) ) == 0 ) return(1);
01622             c = *s; *s = 0;
01623             if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01624                 || ( T = functions[funnum].tabl ) == 0 ) {
01625                 MesPrint("&%s should be a previously declared table",tablename);
01626                 basenumber = 0;
01627             }
01628             else if ( T->sparse == 0 ) {
01629                 MesPrint("&%s should be a sparse table",tablename);
01630                 basenumber = 0;
01631             }

```

```

01632         else { basenumber = GetTableName(d, (char *)tablename); }
01633 /*         if ( T->sparse == 0 ) { SpareTable(T); } */
01634         if ( basenumber > 0 ) {
01635             for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01636                 for ( j = 0; j < NUMOBJECTS; j++ ) {
01637                     if ( d->iblocks[i]->objects[j].tablenumber != basenumber ) continue;
01638                     arguments = p = (UBYTE *) (d->iblocks[i]->objects[j].element);
01639 /*
01640                     Now translate the arguments and see whether we need
01641                     this one....
01642 */
01643                     for ( k = 0, w = AT.WorkPointer; k < ABS(T->numind); k++ ) {
01644                         ParseSignedNumber(x,p);
01645                         *w++ = x; p++;
01646                     }
01647                     sum = FindTableTree(T,AT.WorkPointer,1);
01648                     if ( sum < 0 ) {
01649                         MesPrint("Table %s in tablebase %s has not been loaded properly"
01650                                ,tablename,tablebasename);
01651                         error = 1;
01652                         continue;
01653                     }
01654                     sum += ABS(T->numind) + 4;
01655                     mode = T->tablepointers[sum];
01656                     if ( ( mode & ELEMENTLOADED ) == ELEMENTLOADED ) {
01657                         T->tablepointers[sum] &= ~ELEMENTUSED;
01658                         continue;
01659                     }
01660                     if ( ( mode & ELEMENTUSED ) == 0 ) continue;
01661 /*
01662                     We need this one!
01663 */
01664                     rhs = (UBYTE *)ReadijObject(d,i,j, (char *)arguments);
01665                     if ( rhs ) {
01666                         u = rhs; while ( *u ) u++;
01667                         size = u-rhs;
01668                         u = arguments; while ( *u ) u++;
01669                         size += u-arguments;
01670                         u = tablename; while ( *u ) u++;
01671                         size += u-tablename;
01672                         size += 6;
01673                         buffer = (UBYTE *)Malloca1(size,"TableBase copy");
01674                         t = tablename; u = buffer;
01675                         while ( *t ) *u++ = *t++;
01676                         *u++ = '(';
01677                         t = arguments;
01678                         while ( *t ) *u++ = *t++;
01679                         *u++ = ')'; *u++ = '=';
01680                         t = rhs;
01681                         while ( *t ) *u++ = *t++;
01682                         if ( t == rhs ) { *u++ = '0'; }
01683                         *u++ = 0; *u = 0;
01684                         M_free(rhs,"rhs in TBuse xxx");
01685
01686                         error1 = CoFill(buffer);
01687
01688                         if ( error1 < 0 ) { return(error); }
01689                         if ( error1 != 0 ) error = error1;
01690                         M_free(buffer,"TableBase copy");
01691                     }
01692                     T->tablepointers[sum] &= ~ELEMENTUSED;
01693                     T->tablepointers[sum] |= ELEMENTLOADED;
01694                 }
01695             }
01696         }
01697         *s = c;
01698         while ( *s == ',' || *s == ' ' || *s == '\\t' ) s++;
01699     }
01700 }
01701 else {
01702     s = (UBYTE *) (d->tablenames); basenumber = 0;
01703     while ( *s ) {
01704         basenumber++;
01705         tablename = s;
01706         while ( *s ) s++;
01707         s++;
01708         while ( *s ) s++;
01709         s++;
01710         if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01711             || ( T = functions[funnum].tabl ) == 0 ) {
01712             MesPrint("%s should be a previously declared table",tablename);
01713         }
01714         else if ( T->sparse == 0 ) {
01715             MesPrint("%s should be a sparse table",tablename);
01716         }
01717         if ( T->sparse && T->mode == 0 ) {
01718             MesPrint("In table %s we have a problem with stubb orders in CoTBuse",tablename);

```

```

01719     error = -1;
01720 }
01721 /*      if ( T->spare == 0 ) { SpareTable(T); } */
01722 for ( i = 0; i < d->info.numberofindexblocks; i++ ) {
01723     for ( j = 0; j < NUMOBJECTS; j++ ) {
01724         if ( d->iblocks[i]->objects[j].tablename == basenumber ) {
01725             arguments = p = (UBYTE *) (d->iblocks[i]->objects[j].element);
01726         /*
01727             Now translate the arguments and see whether we need
01728             this one....
01729         */
01730         for ( k = 0, w = AT.WorkPointer; k < ABS(T->numind); k++ ) {
01731             ParseSignedNumber(x,p);
01732             *w++ = x; p++;
01733         }
01734         sum = FindTableTree(T,AT.WorkPointer,1);
01735         if ( sum < 0 ) {
01736             MesPrint("Table %s in tablebase %s has not been loaded properly"
01737                 ,tablename,tablebasename);
01738             error = 1;
01739             continue;
01740         }
01741         sum += ABS(T->numind) + 4;
01742         mode = T->tablepointers[sum];
01743         if ( ( mode & ELEMENTLOADED ) == ELEMENTLOADED ) {
01744             T->tablepointers[sum] &= ~ELEMENTUSED;
01745             continue;
01746         }
01747         if ( ( mode & ELEMENTUSED ) == 0 ) continue;
01748     /*
01749         We need this one!
01750     */
01751     rhs = (UBYTE *) ReadijObject(d,i,j,(char *)arguments);
01752     if ( rhs ) {
01753         u = rhs; while ( *u ) u++;
01754         size = u-rhs;
01755         u = arguments; while ( *u ) u++;
01756         size += u-arguments;
01757         u = tablename; while ( *u ) u++;
01758         size += u-tablename;
01759         size += 6;
01760         buffer = (UBYTE *) Malloc1(size,"TableBase copy");
01761         t = tablename; u = buffer;
01762         while ( *t ) *u++ = *t++;
01763         *u++ = '(';
01764         t = arguments;
01765         while ( *t ) *u++ = *t++;
01766         *u++ = ')'; *u++ = '=';
01767
01768         t = rhs;
01769         while ( *t ) *u++ = *t++;
01770         if ( t == rhs ) { *u++ = '0'; }
01771         *u++ = 0; *u = 0;
01772         M_free(rhs,"rhs in TBase");
01773
01774         error1 = CoFill(buffer);
01775
01776         if ( error1 < 0 ) { return(error); }
01777         if ( error1 != 0 ) error = error1;
01778         M_free(buffer,"TableBase copy");
01779     }
01780     T->tablepointers[sum] &= ~ELEMENTUSED;
01781     T->tablepointers[sum] |= ELEMENTLOADED;
01782 }
01783     }
01784 }
01785 }
01786 }
01787 return(error);
01788 }
01789
01790 /*
01791     #] CoTBase :
01792     #[ CoApply :
01793
01794     Possibly to be followed by names of tables.
01795 */
01796
01797 int CoApply(UBYTE *s)
01798 {
01799     GETIDENTITY
01800     UBYTE *tablename, c;
01801     WORD type, funnum, *w;
01802     TABLES T;
01803     LONG maxtogo = MAXPOSITIVE;
01804     int error = 0;
01805     w = AT.WorkPointer;

```

```

01806     if ( FG.cTable[*s] == 1 ) {
01807         maxtogo = 0;
01808         while ( FG.cTable[*s] == 1 ) {
01809             maxtogo = maxtogo*10 + (*s-'0');
01810             s++;
01811         }
01812         while ( *s == ',' ) s++;
01813         if ( maxtogo > MAXPOSITIVE || maxtogo < 0 ) maxtogo = MAXPOSITIVE;
01814     }
01815     *w++ = TYPEAPPLY; *w++ = 3; *w++ = maxtogo;
01816     while ( *s ) {
01817         tablename = s;
01818         if ( ( s = SkipAName(s) ) == 0 ) return(1);
01819         c = *s; *s = 0;
01820         if ( ( GetVar(tablename,&type,&funnum,CFUNCTION,NOAUTO) == NAMENOTFOUND )
01821             || ( T = functions[funnum].tbl ) == 0 ) {
01822             MesPrint("%s should be a previously declared table",tablename);
01823             error = 1;
01824         }
01825         else if ( T->sparse == 0 ) {
01826             MesPrint("%s should be a sparse table",tablename);
01827             error = 1;
01828         }
01829         *w++ = funnum + FUNCTION;
01830         *s = c;
01831         while ( *s == ' ' || *s == ',' || *s == '\t' ) s++;
01832     }
01833     AT.WorkPointer[1] = w - AT.WorkPointer;
01834     /*
01835     if ( AT.WorkPointer[1] > 2 ) {
01836         AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
01837     }
01838     */
01839     AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
01840     /*
01841     AT.WorkPointer[0] = TYPEAPPLYRESET;
01842     AddNtoL(AT.WorkPointer[1],AT.WorkPointer);
01843     */
01844     return(error);
01845 }
01846
01847 /*
01848 #] CoApply :
01849 #[ CoTBhelp :
01850 */
01851
01852 char *helptb[] = {
01853     "The TableBase statement is used as follows:"
01854     ,"TableBase \"file.tbl\" keyword subkey(s)"
01855     ,"    in which we have"
01856     ,"Keyword    Subkey(s)    Action"
01857     ,"open                Opens file.tbl for R/W"
01858     ,"create                Creates file.tbl for R/W. Old contents are lost"
01859     ,"load                  Loads all stubs of all tables"
01860     ,"load    tablename(s) Loads all stubs the tables mentioned"
01861     ,"enter                  Loads all stubs and rhs of all tables"
01862     ,"enter    tablename(s) Loads all stubs and rhs of the tables mentioned"
01863     ,"audit                  Prints list of contents"
01864     /* ,"replace tablename    saves a table (with overwrite)" */
01865     /* ,"replace tableelement saves a table element (with overwrite)" */
01866     /* ,"cleanup                makes tables contingent" */
01867     ,"addto    tablename    adds all elements if not yet there"
01868     ,"addto    tableelement adds element if not yet there"
01869     /* ,"delete    tablename    removes table from tablebase" */
01870     /* ,"delete    tableelement removes element from tablebase" */
01871     ,"on                compress    elements are stored in gzip format (default)"
01872     ,"off                compress    elements are stored in uncompressed format"
01873     ,"use                compiles all needed elements"
01874     ,"use    tablename(s) compiles all needed elements of these tables"
01875     ,"    "
01876     ,"Related commands are:"
01877     ,"testuse                marks which tbl_ elements occur for all tables"
01878     ,"testuse tablename(s) marks which tbl_ elements occur for given tables"
01879     ,"apply                replaces tbl_ if rhs available"
01880     ,"apply    tablename(s) replaces tbl_ for given tables if rhs available"
01881     ,"    "
01882     };
01883
01884 int CoTBhelp(UBYTE *s)
01885 {
01886     int i, ii = sizeof(helptb)/sizeof(char *);
01887     DUMMYUSE(s);
01888     for ( i = 0; i < ii; i++ ) MesPrint("%s",helptb[i]);
01889     return(0);
01890 }
01891
01892 /*

```

```

01893     #] CoTBhelp :
01894     #[ ReWorkT :
01895
01896     Replaces the STUBBS of the functions in the list.
01897     This gains one space. Hence we have to be very careful
01898 */
01899
01900 void ReWorkT(WORD *term, WORD *funs, WORD numfuns)
01901 {
01902     WORD *tstop, *tend, *m, *t, *tt, *mm, *mmm, *r, *rr;
01903     int i, j;
01904     tend = term + *term; tstop = tend - ABS(tend[-1]);
01905     m = t = term+1;
01906     while ( t < tstop ) {
01907         if ( *t == TABLESTUB ) {
01908             for ( i = 0; i < numfuns; i++ ) {
01909                 if ( -t[FUNHEAD] == funs[i] ) break;
01910             }
01911             if ( numfuns == 0 || i < numfuns ) { /* Hit */
01912                 i = t[1] - 1;
01913                 *m++ = -t[FUNHEAD]; *m++ = i; t += 2; i -= FUNHEAD;
01914                 if ( m < t ) { for ( j = 0; j < FUNHEAD-2; j++ ) *m++ = *t++; }
01915                 else { m += FUNHEAD-2; t += FUNHEAD-2; }
01916                 t++;
01917                 while ( i-- > 0 ) { *m++ = *t++; }
01918                 tt = t; mm = m;
01919                 if ( mm < tt ) {
01920                     while ( tt < tend ) *mm++ = *tt++;
01921                     *term = mm - term;
01922                     tend = term + *term; tstop = tend - ABS(tend[-1]);
01923                     t = m;
01924                 }
01925             }
01926             else { goto inc; }
01927         }
01928         else if ( *t >= FUNCTION ) {
01929             tt = t + t[1];
01930             mm = m;
01931             for ( j = 0; j < FUNHEAD; j++ ) {
01932                 if ( m == t ) { m++; t++; }
01933                 else *m++ = *t++;
01934             }
01935             while ( t < tt ) {
01936                 if ( *t <= -FUNCTION ) {
01937                     if ( m == t ) { m++; t++; }
01938                     else *m++ = *t++;
01939                 }
01940                 else if ( *t < 0 ) {
01941                     if ( m == t ) { m += 2; t += 2; }
01942                     else { *m++ = *t++; *m++ = *t++; }
01943                 }
01944                 else {
01945                     rr = t + *t; mmm = m;
01946                     for ( j = 0; j < ARGHEAD; j++ ) {
01947                         if ( m == t ) { m++; t++; }
01948                         else *m++ = *t++;
01949                     }
01950                     while ( t < rr ) {
01951                         r = t + *t;
01952                         ReWorkT(t, funs, numfuns);
01953                         j = *t;
01954                         if ( m == t ) { m += j; t += j; }
01955                         else { while ( j-- >= 0 ) *m++ = *t++; }
01956                         t = r;
01957                     }
01958                     *mmm = m - mmm;
01959                 }
01960             }
01961             mm[1] = m - mm;
01962             t = tt;
01963         }
01964         else {
01965             inc:
01966                 j = t[1];
01967                 if ( m < t ) { while ( j-- >= 0 ) *m++ = *t++; }
01968                 else { m += j; t += j; }
01969             }
01970         if ( m < t ) {
01971             while ( t < tend ) *m++ = *t++;
01972             *term = m - term;
01973         }
01974     }
01975
01976 /*
01977     #] ReWorkT :
01978     #[ Apply :
01979 */

```



```

01980
01981 void Apply(WORD *term, WORD level)
01982 {
01983     WORD *funcs, numfuncs;
01984     TABLES T;
01985     int i, j;
01986     CBUF *C = cbuf+AM.rbufnum;
01987     /*
01988     Point the tables in the proper direction
01989     */
01990     numfuncs = C->lhs[level][1] - 2;
01991     funcs = C->lhs[level] + 2;
01992     if ( numfuncs > 0 ) {
01993         for ( i = MAXBUILTINFUNCTION-FUNCTION; i < AC.FunctionList.num; i++ ) {
01994             if ( ( T = functions[i].tabl ) != 0 ) {
01995                 for ( j = 0; j < numfuncs; j++ ) {
01996                     if ( i == (funcs[j]-FUNCTION) && T->spare ) {
01997                         FlipTable(&(functions[i]),0);
01998                         break;
01999                     }
02000                 }
02001             }
02002         }
02003     }
02004     else {
02005         for ( i = MAXBUILTINFUNCTION-FUNCTION; i < AC.FunctionList.num; i++ ) {
02006             if ( ( T = functions[i].tabl ) != 0 ) {
02007                 if ( T->spare ) FlipTable(&(functions[i]),0);
02008             }
02009         }
02010     }
02011     /*
02012     Now the replacements everywhere of
02013     id tbl_(table,?a) = table(?a);
02014     Actually, this has to be done recursively.
02015     Note that we actually gain one space.
02016     */
02017     ReWorkT(term, funcs, numfuncs);
02018 }
02019
02020 /*
02021 #] Apply :
02022 #[ ApplyExec :
02023
02024 Replaces occurrences of tbl_(table,indices,pattern) by the proper
02025 rhs of table(indices,pattern). It does this up to maxtogo times
02026 in the given term. It starts with the occurrences inside the
02027 arguments of functions. If necessary it finishes at groundlevel.
02028 An infinite number of tries is indicated by maxtogo = 2^15-1 or 2^31-1.
02029 The occurrences are replaced by subexpressions. This allows TestSub
02030 to finish the job properly.
02031
02032 The main trick here is T = T->spare which turns to the proper rhs.
02033
02034 The return value is the number of substitutions that can still be made
02035 based on maxtogo. Hence, if the returnvalue is different from maxtogo
02036 there was a substitution.
02037 */
02038
02039 int ApplyExec(WORD *term, int maxtogo, WORD level)
02040 {
02041     GETIDENTITY
02042     WORD rhsnumber, *Tpattern, *funcs, numfuncs, funnum;
02043     WORD ii, *t, *tl, *w, *p, *m, *ml, *u, *r, tbufnum, csize, wilds;
02044     NESTING NN;
02045     int i, j, isp, stilltogo;
02046     CBUF *C;
02047     TABLES T;
02048     /*
02049     Startup. We need NestPoin for when we have to replace something deep down.
02050     */
02051     t = term;
02052     m = t + *t;
02053     csize = ABS(m[-1]);
02054     m -= csize;
02055     AT.NestPoin->termsize = t;
02056     if ( AT.NestPoin == AT.Nest ) AN.EndNest = t + *t;
02057     t++;
02058     /*
02059     First we look inside function arguments. Also when clean!
02060     */
02061     while ( t < m ) {
02062         if ( *t < FUNCTION ) { t += t[1]; continue; }
02063         if ( functions[*t-FUNCTION].spec > 0 ) { t += t[1]; continue; }
02064         AT.NestPoin->funsize = t;
02065         r = t + t[1];
02066         t += FUNHEAD;

```

```

02067     while ( t < r ) {
02068         if ( *t < 0 ) { NEXTARG(t); continue; }
02069         AT.NestPoin->argsize = t1 = t;
02070         u = t + *t;
02071         t += ARGHEAD;
02072         AT.NestPoin++;
02073         while ( t < u ) {
02074             /*
02075                 Now we loop over the terms inside a function argument
02076                 This defines a recursion and we have to call ApplyExec again.
02077                 The real problem is when we catch something and we have
02078                 to insert a subexpression pointer. This may use more or
02079                 less space and the whole term has to be readjusted.
02080                 This is why we have the NestPoin variables. They tell us
02081                 where the sizes of the term, the function and the arguments
02082                 are sitting, and also where the dirty flags are.
02083                 This readjusting is of course done in the groundlevel code.
02084                 Here we worry about the maxtogo count.
02085             */
02086             stilltogo = ApplyExec(t,maxtogo,level);
02087             if ( stilltogo != maxtogo ) {
02088                 if ( stilltogo <= 0 ) {
02089                     AT.NestPoin--;
02090                     return(stilltogo);
02091                 }
02092                 maxtogo = stilltogo;
02093                 u = t1 + *t1;
02094                 m = term + *term - csize;
02095             }
02096             t += *t;
02097         }
02098         AT.NestPoin--;
02099     }
02100 }
02101 /*
02102 Now we look at the ground level
02103 */
02104 C = cbuf+AM.rbufnum;
02105 t = term + 1;
02106 while ( t < m ) {
02107     if ( *t != TABLESTUB ) { t += t[1]; continue; }
02108     funnum = -t[FUNHEAD];
02109     if ( ( funnum < FUNCTION )
02110         || ( funnum >= FUNCTION+WILD OFFSET )
02111         || ( ( T = functions[funnum-FUNCTION].tabl ) == 0 )
02112         || ( T->sparse == 0 )
02113         || ( T->spare == 0 ) ) { t += t[1]; continue; }
02114     numfuns = C->lhs[level][1] - 3;
02115     funs = C->lhs[level] + 3;
02116     if ( numfuns > 0 ) {
02117         for ( i = 0; i < numfuns; i++ ) {
02118             if ( funs[i] == funnum ) break;
02119         }
02120         if ( i >= numfuns ) { t += t[1]; continue; }
02121     }
02122     r = t + t[1];
02123     AT.NestPoin->funsize = t + 1;
02124     t1 = t;
02125     t += FUNHEAD + 1;
02126     /*
02127         Test whether the table catches
02128         Test 1: index arguments and range. isp will be the number
02129         of the element in the table.
02130     */
02131     T = T->sparse;
02132     #ifdef WITHPTHREADS
02133     Tpattern = T->pattern[identity];
02134     #else
02135     Tpattern = T->pattern;
02136     #endif
02137     p = Tpattern+FUNHEAD+1;
02138     for ( i = 0; i < ABS(T->numind); i++, t += 2 ) {
02139         if ( *t != -SNUMBER ) break;
02140     }
02141     if ( i < ABS(T->numind) ) { t = r; continue; }
02142     isp = FindTableTree(T,t1+FUNHEAD+1,2);
02143     if ( isp < 0 ) { t = r; continue; }
02144     rhsnumber = T->tablepointers[isp+ABS(T->numind)];
02145     #if ( TABLEEXTENSION == 2 )
02146     tbufnum = T->bunum;
02147     #else
02148     tbufnum = T->tablepointers[isp+ABS(T->numind)+1];
02149     #endif
02150     t = t1+FUNHEAD+2;
02151     ii = ABS(T->numind);
02152     while ( --ii >= 0 ) {
02153         *p = *t; t += 2; p += 2;

```

```

02154     }
02155     /*
02156         If there are more arguments we have to do some
02157         pattern matching. This should be easy. We adapted the
02158         pattern, so that the array indices match already.
02159     */
02160     #ifdef WITHPTHREADS
02161         AN.FullProto = T->prototype[identity];
02162     #else
02163         AN.FullProto = T->prototype;
02164     #endif
02165     AN.WildValue = AN.FullProto + SUBEXPSIZE;
02166     AN.WildStop = AN.FullProto+AN.FullProto[1];
02167     ClearWild(BHEAD0);
02168     AN.RepFunNum = 0;
02169     AN.RepFunList = AN.EndNest;
02170     AT.WorkPointer = (WORD *)(((UBYTE *) (AN.EndNest)) + AM.MaxTer/2);
02171     /*
02172         The RepFunList is after the term but not very relevant.
02173         We need because MatchFunction uses it
02174     */
02175     if ( AT.WorkPointer + t1[1] >= AT.WorkTop ) { MesWork(); }
02176     wilds = 0;
02177     w = AT.WorkPointer;
02178     *w++ = -t1[FUNHEAD];
02179     *w++ = t1[1] - 1;
02180     for ( i = 2; i < FUNHEAD; i++ ) *w++ = t1[i];
02181     t = t1 + FUNHEAD+1;
02182     while ( t < r ) *w++ = *t++;
02183     t = AT.WorkPointer;
02184     AT.WorkPointer = w;
02185     if ( MatchFunction(BHEAD Tpattern,t,&wilds) > 0 ) {
02186     /*
02187         Here we caught one. Now we should worry about:
02188         1: inserting the subexpression pointer with its wildcards
02189         2: NestPoin because we may not be at the lowest level
02190         The function starts at t1.
02191     */
02192     #ifdef WITHPTHREADS
02193         m1 = T->prototype[identity];
02194     #else
02195         m1 = T->prototype;
02196     #endif
02197     m1[2] = rhsnumber;
02198     m1[4] = tbufnum;
02199     t = t1;
02200     j = t[1];
02201     i = m1[1];
02202     if ( j > i ) {
02203         j = i - j;
02204         NCOPY(t,m1,i);
02205         m1 = AN.EndNest;
02206         while ( r < m1 ) *t++ = *r++;
02207         AN.EndNest = t;
02208         *term += j;
02209         NN = AT.NestPoin;
02210         while ( NN > AT.Nest ) {
02211             NN--;
02212             NN->termsize[0] += j;
02213             NN->funsize[1] += j;
02214             NN->argsize[0] += j;
02215             NN->funsize[2] |= DIRTYFLAG;
02216             NN->argsize[1] |= DIRTYFLAG;
02217         }
02218         m += j;
02219     }
02220     else if ( j < i ) {
02221         j = i-j;
02222         t = AN.EndNest;
02223         while ( t >= r ) { t[j] = *t; t--; }
02224         t = t1;
02225         NCOPY(t,m1,i);
02226         AN.EndNest += j;
02227         *term += j;
02228         NN = AT.NestPoin;
02229         while ( NN > AT.Nest ) {
02230             NN--;
02231             NN->termsize[0] += j;
02232             NN->funsize[1] += j;
02233             NN->argsize[0] += j;
02234             NN->funsize[2] |= DIRTYFLAG;
02235             NN->argsize[1] |= DIRTYFLAG;
02236         }
02237         m += j;
02238     }
02239     else {
02240         NCOPY(t,m1,j);

```

```

02241         }
02242         r = t1 + t1[1];
02243         maxtogo--;
02244         if ( maxtogo <= 0 ) return(maxtogo);
02245     }
02246     t = r;
02247 }
02248 return(maxtogo);
02249 }
02250
02251 /*
02252 #] ApplyExec :
02253 #[ ApplyReset :
02254 */
02255
02256 void ApplyReset(WORD level)
02257 {
02258     WORD *funcs, numfuncs;
02259     TABLES T;
02260     int i, j;
02261     CBUF *C = cbuf+AM.rbufnum;
02262
02263     numfuncs = C->lhs[level][1] - 2;
02264     funcs = C->lhs[level] + 2;
02265     if ( numfuncs > 0 ) {
02266         for ( i = MAXBUILTINFUNCTION-FUNCTION; i < AC.FunctionList.num; i++ ) {
02267             if ( ( T = functions[i].tabl ) != 0 ) {
02268                 for ( j = 0; j < numfuncs; j++ ) {
02269                     if ( i == (funcs[j]-FUNCTION) && T->spare ) {
02270                         FlipTable(&(functions[i]),1);
02271                         break;
02272                     }
02273                 }
02274             }
02275         }
02276     }
02277     else {
02278         for ( i = MAXBUILTINFUNCTION-FUNCTION; i < AC.FunctionList.num; i++ ) {
02279             if ( ( T = functions[i].tabl ) != 0 ) {
02280                 if ( T->spare ) FlipTable(&(functions[i]),1);
02281             }
02282         }
02283     }
02284 }
02285
02286 /*
02287 #] ApplyReset :
02288 #[ TableReset :
02289 */
02290
02291 void TableReset(void)
02292 {
02293     TABLES T;
02294     int i;
02295
02296     for ( i = MAXBUILTINFUNCTION-FUNCTION; i < AC.FunctionList.num; i++ ) {
02297         if ( ( T = functions[i].tabl ) != 0 && T->spare && T->mode == 0 ) {
02298             functions[i].tabl = T->spare;
02299         }
02300     }
02301 }
02302
02303 /*
02304 #] TableReset :
02305 #[ LoadTableElement :
02306 ?????
02307 int LoadTableElement(DBASE *d, TABLE *T, WORD num)
02308 {
02309 }
02310
02311 #] LoadTableElement :
02312 #[ ReleaseTB :
02313
02314 Releases all TableBases
02315 */
02316
02317 int ReleaseTB(void)
02318 {
02319     DBASE *d;
02320     int i;
02321     for ( i = NumTableBases - 1; i >= 0; i-- ) {
02322         d = tablebases+i;
02323         fclose(d->handle);
02324         FreeTableBase(d);
02325     }
02326     return(0);
02327 }

```

```

02328
02329 /*
02330      #] ReleaseTB :
02331 */

```

4.145 threads.c File Reference

4.145.1 Detailed Description

Routines for the interface of FORM with the pthreads library

This is the main part of the parallelization of TFORM. It is important to also look in the files [structs.h](#) and [variable.h](#) because the treatment of the A and B structs is essential (these structs are used by means of the macros AM, AP, AC, AS, AR, AT, AN, AO and AX). Also the definitions and use of the macros BHEAD and PHEAD should be looked up.

The sources are set up in such a way that if WITHPTHREADS isn't defined there is no trace of pthread parallelization. The reason is that TFORM is far more memory hungry than sequential FORM.

Special attention should also go to the locks. The proper use of the locks is essential and determines whether TFORM can work at all. We use the LOCK/UNLOCK macros which are empty in the case of sequential FORM. These locks are at many places in the source files when workers can interfere with each others data or with the data of the master.

Definition in file [threads.c](#).

4.146 threads.c

[Go to the documentation of this file.](#)

```

00001
00022 /* #] License : */
00023 /*
00024 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00025 *   When using this file you are requested to refer to the publication
00026 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00027 *   This is considered a matter of courtesy as the development was paid
00028 *   for by FOM the Dutch physics granting agency and we would like to
00029 *   be able to track its scientific use to convince FOM of its value
00030 *   for the community.
00031 *
00032 *   This file is part of FORM.
00033 *
00034 *   FORM is free software: you can redistribute it and/or modify it under the
00035 *   terms of the GNU General Public License as published by the Free Software
00036 *   Foundation, either version 3 of the License, or (at your option) any later
00037 *   version.
00038 *
00039 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00040 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00041 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00042 *   details.
00043 *
00044 *   You should have received a copy of the GNU General Public License along
00045 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00046 */
00047 /* #] License : */
00048
00049 #ifdef WITHPTHREADS
00050
00051 #define WHOLEBRACKETS
00052 /*
00053 *   #] Variables :
00054 *
00055 *   The sortbot additions are from 17-may-2007 and after. They constitute
00056 *   an attempt to make the final merge sorting faster for the master.
00057 *   This way the master has only one compare per term.

```

```

00058     It does add some complexity, but the final merge routine (MasterMerge)
00059     is much simpler for the sortbots. On the other hand the original merging is
00060     for a large part a copy of the MergePatches routine in sort.c and hence
00061     even though complex the bad part has been thoroughly debugged.
00062 */
00063
00064 #include "form3.h"
00065
00066 #ifdef WITH_ALARM
00067 // This is only required if we are blocking SIG_ALARM in the worker threads.
00068 #include <signal.h>
00069 #endif
00070
00071 #ifdef WITHFLOAT
00072 #include <gmp.h>
00073
00074 int PackFloat(WORD *,mpf_t);
00075 int UnpackFloat(mpf_t, WORD *);
00076 void RatToFloat(mpf_t result, UWORD *format, int ratsize);
00077 #endif
00078
00079 static int numberofthreads;
00080 static int numberofworkers;
00081 static int identityofthreads = 0;
00082 static int *listofavailables;
00083 static int topofavailables = 0;
00084 static pthread_key_t identitykey;
00085 static INILOCK(numberofthreadslock)
00086 static INILOCK(availabilitylock)
00087 static pthread_t *threadpointers = 0;
00088 static pthread_mutex_t *wakeuplocks;
00089 static pthread_mutex_t *wakeupmasterthreadlocks;
00090 static pthread_cond_t *wakeupconditions;
00091 static pthread_condattr_t *wakeupconditionattributes;
00092 static int *wakeup;
00093 static int *wakeupmasterthread;
00094 static INILOCK(wakeupmasterlock)
00095 static pthread_cond_t wakeupmasterconditions = PTHREAD_COND_INITIALIZER;
00096 static pthread_cond_t *wakeupmasterthreadconditions;
00097 static int wakeupmaster = 0;
00098 static int identityretval;
00099 /* static INILOCK(clearclocklock) */
00100 static LONG *timerinfo;
00101 static LONG *sumtimerinfo;
00102 static int numberclaimed;
00103
00104 static THREADBUCKET **threadbuckets, **freebuckets;
00105 static int numthreadbuckets;
00106 static int numberoffullbuckets;
00107
00108 /* static int numberbusy = 0; */
00109
00110 INILOCK(dummylock)
00111 INIRWLOCK(dummyrwlock)
00112 static pthread_cond_t dummywakeupcondition = PTHREAD_COND_INITIALIZER;
00113
00114 #ifdef WITHSORTBOTS
00115 static POSITION SortBotPosition;
00116 static int numberofsortbots;
00117 static INILOCK(wakeupsortbotlock)
00118 static pthread_cond_t wakeupsortbotconditions = PTHREAD_COND_INITIALIZER;
00119 static int topsortbotavailables = 0;
00120 static LONG numberofterms;
00121 #endif
00122
00123 /*
00124     #] Variables :
00125     #[ Identity :
00126         #[ StartIdentity :
00127     */
00128 void StartIdentity(void)
00129 {
00130     pthread_key_create(&identitykey,FinishIdentity);
00131 }
00132
00133 /*
00134     #] StartIdentity :
00135     #[ FinishIdentity :
00136 */
00137 void FinishIdentity(void *keyp)
00138 {
00139     DUMMYUSE(keyp);
00140     /* free(keyp); */
00141 }
00142
00143 /*
00144     #] FinishIdentity :

```

```

00154         #[] SetIdentity :
00155     */
00160 int SetIdentity(int *identityretval)
00161 {
00162     /*
00163     #ifdef _MSC_VER
00164         printf("addr %d\n",&numberofthreadslock);
00165         printf("size %d\n",sizeof(numberofthreadslock));
00166     #endif
00167     */
00168     LOCK(numberofthreadslock);
00169     *identityretval = identityofthreads++;
00170     UNLOCK(numberofthreadslock);
00171     pthread_setspecific(identitykey, (void *)identityretval);
00172     return(*identityretval);
00173 }
00174
00175 /*
00176     #] SetIdentity :
00177     #[] WhoAmI :
00178     */
00179
00190 int WhoAmI(void)
00191 {
00192     int *identity;
00193     /*
00194     First a fast exit for when there is at most one thread
00195     */
00196     if ( identityofthreads <= 1 ) return(0);
00197     /*
00198     Now the reading of the key.
00199     According to the book the statement should read:
00200
00201     pthread_getspecific(identitykey, (void **)(&identity));
00202
00203     but according to the information in pthread.h it is:
00204     */
00205     identity = (int *)pthread_getspecific(identitykey);
00206     return(*identity);
00207 }
00208
00209 /*
00210     #] WhoAmI :
00211     #[] BeginIdentities :
00212     */
00218 void BeginIdentities(void)
00219 {
00220     StartIdentity();
00221     SetIdentity(&identityretval);
00222 }
00223
00224 /*
00225     #] BeginIdentities :
00226     #] Identity :
00227     #[] StartHandleLock :
00228     */
00235 void StartHandleLock(void)
00236 {
00237     AM.handlelock = dummyrwlock;
00238 }
00239
00240 /*
00241     #] StartHandleLock :
00242     #[] StartAllThreads :
00243     */
00261 int StartAllThreads(int number)
00262 {
00263     int identity, j, dummy, mul;
00264     ALLPRIVATES *B;
00265     pthread_t thethread;
00266     identity = WhoAmI();
00267
00268     #ifdef WITHSORTBOTS
00269     timerinfo = (LONG *)Malloc1(sizeof(LONG)*number*2,"timerinfo");
00270     sumtimerinfo = (LONG *)Malloc1(sizeof(LONG)*number*2,"sumtimerinfo");
00271     for ( j = 0; j < number*2; j++ ) { timerinfo[j] = 0; sumtimerinfo[j] = 0; }
00272     mul = 2;
00273     #else
00274     timerinfo = (LONG *)Malloc1(sizeof(LONG)*number,"timerinfo");
00275     sumtimerinfo = (LONG *)Malloc1(sizeof(LONG)*number,"sumtimerinfo");
00276     for ( j = 0; j < number; j++ ) { timerinfo[j] = 0; sumtimerinfo[j] = 0; }
00277     mul = 1;
00278     #endif
00279
00280     listofavaiables = (int *)Malloc1(sizeof(int)*(number+1),"listofavaiables");
00281     threadpointers = (pthread_t *)Malloc1(sizeof(pthread_t)*number*mul,"threadpointers");
00282     AB = (ALLPRIVATES **)Malloc1(sizeof(ALLPRIVATES *)*number*mul,"Private structs");

```

```

00283
00284     wakeup = (int *)Malloc1(sizeof(int)*number*mul,"wakeup");
00285     wakeuplocks = (pthread_mutex_t *)Malloc1(sizeof(pthread_mutex_t)*number*mul,"wakeuplocks");
00286     wakeupconditions = (pthread_cond_t
*)Malloc1(sizeof(pthread_cond_t)*number*mul,"wakeupconditions");
00287     wakeupconditionattributes = (pthread_condattr_t *)
        Malloc1(sizeof(pthread_condattr_t)*number*mul,"wakeupconditionattributes");
00288
00289     wakeupmasterthread = (int *)Malloc1(sizeof(int)*number*mul,"wakeupmasterthread");
00290     wakeupmasterthreadlocks = (pthread_mutex_t
*)Malloc1(sizeof(pthread_mutex_t)*number*mul,"wakeupmasterthreadlocks");
00291     wakeupmasterthreadconditions = (pthread_cond_t
*)Malloc1(sizeof(pthread_cond_t)*number*mul,"wakeupmasterthread");
00292
00293     numberofthreads = number;
00294     numberofworkers = number - 1;
00295     threadpointers[identity] = pthread_self();
00296     topofavailables = 0;
00297
00298 #ifdef WITH_ALARM
00299 /* During thread creation, we block SIGALRM on the main thread. The created
00300    threads will inherit this. This is required for #timeout to work properly
00301    in TFORM: only the main thread should receive SIGALRM. */
00302     sigset_t sig_set;
00303     sigemptyset(&sig_set);
00304     sigaddset(&sig_set, SIGALRM);
00305     pthread_sigmask(SIG_BLOCK, &sig_set, NULL);
00306 #endif
00307
00308     for ( j = 1; j < number; j++ ) {
00309         if ( pthread_create(&thethread,NULL,RunThread,(void *)(&dummy)) )
00310             goto failure;
00311     }
00312 /*
00313    Now we initialize the master at the same time that the workers are doing so.
00314 */
00315     B = InitializeOneThread(identity);
00316     AR.infile = &(AR.Fscr[0]);
00317     AR.outfile = &(AR.Fscr[1]);
00318     AR.hidefile = &(AR.Fscr[2]);
00319     AM.sbuflock = dummylock;
00320     AS.inputslock = dummylock;
00321     AS.outputslock = dummylock;
00322     AS.MaxExprSizeLock = dummylock;
00323     AP.PreVarLock = dummylock;
00324     AC.halfmodlock = dummylock;
00325     MakeThreadBuckets(number,0);
00326 /*
00327    Now we wait for the workers to finish their startup.
00328    We don't want to initialize the sortbots yet and run the risk that
00329    some of them may end up with a lower number than one of the workers.
00330 */
00331     MasterWaitAll();
00332 #ifdef WITHSORTBOTS
00333     if ( numberofworkers > 2 ) {
00334         numberofsortbots = numberofworkers-2;
00335         for ( j = numberofworkers+1; j < 2*numberofworkers-1; j++ ) {
00336             if ( pthread_create(&thethread,NULL,RunSortBot,(void *)(&dummy)) )
00337                 goto failure;
00338         }
00339     }
00340     else {
00341         numberofsortbots = 0;
00342     }
00343     MasterWaitAllSortBots();
00344     DefineSortBotTree();
00345 #endif
00346     IniSortBlocks(number-1);
00347     AS.MasterSort = 0;
00348     AM.storefilelock = dummylock;
00349
00350 #ifdef WITH_ALARM
00351 /* Now we allow the main thread to receive SIGALRM again. */
00352     pthread_sigmask(SIG_UNBLOCK, &sig_set, NULL);
00353 #endif
00354
00355 /*
00356 MesPrint("AB = %x %x %x  %d",AB[0],AB[1],AB[2], identityofthreads);
00357 */
00358     return(0);
00359 failure:
00360     MesPrint("Cannot start %d threads",number);
00361     Terminate(-1);
00362     return(-1);
00363 }
00364
00365 /*
00366

```



```

00367     #] StartAllThreads :
00368     #[ InitializeOneThread :
00369     */
00373     UBYTE *scratchname[] = { (UBYTE *)"scratchsize",
00374                             (UBYTE *)"scratchsize",
00375                             (UBYTE *)"hidesize" };
00402     ALLPRIVATES *InitializeOneThread(int identity)
00403     {
00404         WORD *t, *ScratchBuf;
00405         int i, j, bsize, *bp;
00406         LONG ScratchSize[3], IOSize;
00407         ALLPRIVATES *B;
00408         UBYTE *s;
00409
00410         wakeup[identity] = 0;
00411         wakeuplocks[identity] = dummylock;
00412         pthread_condattr_init(&(wakeupconditionattributes[identity]));
00413         pthread_condattr_setpshared(&(wakeupconditionattributes[identity]),PTHREAD_PROCESS_PRIVATE);
00414         wakeupconditions[identity] = dummywakeupcondition;
00415         pthread_cond_init(&(wakeupconditions[identity]),&(wakeupconditionattributes[identity]));
00416         wakeupmasterthread[identity] = 0;
00417         wakeupmasterthreadlocks[identity] = dummylock;
00418         wakeupmasterthreadconditions[identity] = dummywakeupcondition;
00419
00420         bsize = sizeof(ALLPRIVATES);
00421         bsize = (bsize+sizeof(int)-1)/sizeof(int);
00422         B = (ALLPRIVATES *)Malloc1(sizeof(int)*bsize,"B struct");
00423         for ( bp = (int *)B, j = 0; j < bsize; j++ ) *bp++ = 0;
00424
00425         AB[identity] = B;
00426     /*
00427         12-jun-2007 JV:
00428         For the timing one has to know a few things:
00429         The POSIX standard is that there is only a single process ID and that
00430         getrusage returns the time of all the threads together.
00431         Under Linux there are two methods though: The older LinuxThreads and NPTL.
00432         LinuxThreads gives each thread its own process id. This makes that we
00433         can time the threads with getrusage, and hence this was done. Under NPTL
00434         this has been 'corrected' and suddenly getrusage doesn't work anymore the
00435         way it used to. Now we need
00436         clock_gettime(CLOCK_THREAD_CPUTIME_ID,&timing)
00437         which is declared in <time.h> and we need -lrt extra in the link statement.
00438         (this is at least the case on blade02 at DESY-Zeuthen).
00439         See also the code in tools.c at the routine Timer.
00440         We may still have to include more stuff there.
00441     */
00442     if ( identity > 0 ) TimeCPU(0);
00443
00444     #ifdef WITHSORTBOTS
00445
00446     if ( identity > numberofworkers ) {
00447     /*
00448         Some workspace is needed when we have a PolyFun and we have to add
00449         two terms and the new result is going to be longer than the old result.
00450     */
00451         LONG length = AM.WorkSize*sizeof(WORD)/8+AM.MaxTer*2;
00452         AT.WorkSpace = (WORD *)Malloc1(length,"WorkSpace");
00453         AT.WorkTop = AT.WorkSpace + length/sizeof(WORD);
00454         AT.WorkPointer = AT.WorkSpace;
00455         AT.identity = identity;
00456     /*
00457         The SB struct gets treated in IniSortBlocks.
00458         The SortBotIn variables will be defined DefineSortBotTree.
00459     */
00460         if ( AN.ScratchC == 0 ) {
00461             AN.ScratchC = (UWORD *)Malloc1(2*(AM.MaxTal+2)*sizeof(UWORD),"Scratch in SortBot");
00462         }
00463         AT.SS = (SORTING *)Malloc1(sizeof(SORTING),"dummy sort buffer");
00464         AT.SS->PolyFlag = 0;
00465
00466         AT.comsym[0] = 8;
00467         AT.comsym[1] = SYMBOL;
00468         AT.comsym[2] = 4;
00469         AT.comsym[3] = 0;
00470         AT.comsym[4] = 1;
00471         AT.comsym[5] = 1;
00472         AT.comsym[6] = 1;
00473         AT.comsym[7] = 3;
00474         AT.comnum[0] = 4;
00475         AT.comnum[1] = 1;
00476         AT.comnum[2] = 1;
00477         AT.comnum[3] = 3;
00478         AT.comfun[0] = FUNHEAD+4;
00479         AT.comfun[1] = FUNCTION;
00480         AT.comfun[2] = FUNHEAD;
00481         AT.comfun[3] = 0;
00482     #if FUNHEAD > 3

```

```

00483         for ( i = 4; i <= FUNHEAD; i++ )
00484             AT.comfun[i] = 0;
00485     #endif
00486     AT.comfun[FUNHEAD+1] = 1;
00487     AT.comfun[FUNHEAD+2] = 1;
00488     AT.comfun[FUNHEAD+3] = 3;
00489     AT.comind[0] = 7;
00490     AT.comind[1] = INDEX;
00491     AT.comind[2] = 3;
00492     AT.comind[3] = 0;
00493     AT.comind[4] = 1;
00494     AT.comind[5] = 1;
00495     AT.comind[6] = 3;
00496
00497     AT.inprimelist = -1;
00498     AT.sizeprimelist = 0;
00499     AT.primelist = 0;
00500     AT.bracketinfo = 0;
00501
00502     AR.CompareRoutine = (COMPAREDUMMY) (&Compare1);
00503
00504     AR.sLevel = 0;
00505     AR.wranfia = 0;
00506     AR.wranfcall = 0;
00507     AR.wranfnpair1 = NPAIR1;
00508     AR.wranfnpair2 = NPAIR2;
00509     AN.NumFunSorts = 5;
00510     AN.MaxFunSorts = 5;
00511     AN.SplitScratch = 0;
00512     AN.SplitScratchSize = AN.InScratch = 0;
00513     AN.SplitScratch1 = 0;
00514     AN.SplitScratchSize1 = AN.InScratch1 = 0;
00515
00516     AN.FunSorts = (SORTING **)Malloc1((AN.NumFunSorts+1)*sizeof(SORTING *),"FunSort pointers");
00517     for ( i = 0; i <= AN.NumFunSorts; i++ ) AN.FunSorts[i] = 0;
00518     AN.FunSorts[0] = AT.S0 = AT.SS;
00519     AN.idfunctionflag = 0;
00520     AN.tryterm = 0;
00521
00522     return(B);
00523 }
00524 if ( identity == 0 && AN.SoScratC == 0 ) {
00525     AN.SoScratC = (UWORD *)Malloc1(2*(AM.MaxTal+2)*sizeof(UWORD),"Scratch in SortBot");
00526 }
00527 #endif
00528 AR.CurDum = AM.IndDum;
00529 for ( j = 0; j < 3; j++ ) {
00530     if ( identity == 0 ) {
00531         if ( j == 2 ) {
00532             ScratchSize[j] = AM.HideSize;
00533         }
00534         else {
00535             ScratchSize[j] = AM.ScratSize;
00536         }
00537         if ( ScratchSize[j] < 10*AM.MaxTer ) ScratchSize[j] = 10 * AM.MaxTer;
00538     }
00539     else {
00540         /*
00541             ScratchSize[j] = AM.ScratSize / (numberofthreads-1);
00542             ScratchSize[j] = ScratchSize[j] / 20;
00543             if ( ScratchSize[j] < 10*AM.MaxTer ) ScratchSize[j] = 10 * AM.MaxTer;
00544         */
00545         if ( j == 1 ) ScratchSize[j] = AM.ThreadScratOutSize;
00546         else ScratchSize[j] = AM.ThreadScratSize;
00547         if ( ScratchSize[j] < 4*AM.MaxTer ) ScratchSize[j] = 4 * AM.MaxTer;
00548         AR.Fscr[j].name = 0;
00549     }
00550     ScratchSize[j] = ( ScratchSize[j] + 255 ) / 256;
00551     ScratchSize[j] = ScratchSize[j] * 256;
00552     ScratchBuf = (WORD *)Malloc1(ScratchSize[j]*sizeof(WORD),(char *) (scratchname[j]));
00553     AR.Fscr[j].POsize = ScratchSize[j] * sizeof(WORD);
00554     AR.Fscr[j].POfull = AR.Fscr[j].POfill = AR.Fscr[j].PObuffer = ScratchBuf;
00555     AR.Fscr[j].POstop = AR.Fscr[j].PObuffer + ScratchSize[j];
00556     PUTZERO(AR.Fscr[j].POposition);
00557     AR.Fscr[j].pthreadlock = dummylock;
00558     AR.Fscr[j].wPOsize = AR.Fscr[j].POsize;
00559     AR.Fscr[j].wPObuffer = AR.Fscr[j].PObuffer;
00560     AR.Fscr[j].wPOfill = AR.Fscr[j].POfill;
00561     AR.Fscr[j].wPOfull = AR.Fscr[j].POfull;
00562     AR.Fscr[j].wPOstop = AR.Fscr[j].POstop;
00563 }
00564 AR.InInBuf = 0;
00565 AR.InHiBuf = 0;
00566 AR.Fscr[0].handle = -1;
00567 AR.Fscr[1].handle = -1;
00568 AR.Fscr[2].handle = -1;
00569 AR.FoStage4[0].handle = -1;

```

```

00570     AR.FoStage4[1].handle = -1;
00571     IOsize = AM.S0->file.POSize;
00572 #ifdef WITHZLIB
00573     AR.FoStage4[0].ziosize = IOsize;
00574     AR.FoStage4[1].ziosize = IOsize;
00575     AR.FoStage4[0].ziobuffer = 0;
00576     AR.FoStage4[1].ziobuffer = 0;
00577 #endif
00578     AR.FoStage4[0].POsize = ((IOsize+sizeof(WORD)-1)/sizeof(WORD))*sizeof(WORD);
00579     AR.FoStage4[1].POsize = ((IOsize+sizeof(WORD)-1)/sizeof(WORD))*sizeof(WORD);
00580
00581     AR.hidefile = &(AR.Fscr[2]);
00582     AR.StoreData.Handle = -1;
00583     AR.SortType = AC.SortType;
00584
00585     AN.IndDum = AM.IndDum;
00586
00587     if ( identity > 0 ) {
00588         s = (UBYTE *) (FG.fname); i = 0;
00589         while ( *s ) { s++; i++; }
00590         s = (UBYTE *) Malloc1(sizeof(char)*(i+12),"name for Fscr[0] file");
00591         snprintf((char *)s,i+12,"%s.%d",FG.fname,identity);
00592         s[i-3] = 's'; s[i-2] = 'c'; s[i-1] = '0';
00593         AR.Fscr[0].name = (char *)s;
00594         s = (UBYTE *) (FG.fname); i = 0;
00595         while ( *s ) { s++; i++; }
00596         s = (UBYTE *) Malloc1(sizeof(char)*(i+12),"name for Fscr[1] file");
00597         snprintf((char *)s,i+12,"%s.%d",FG.fname,identity);
00598         s[i-3] = 's'; s[i-2] = 'c'; s[i-1] = '1';
00599         AR.Fscr[1].name = (char *)s;
00600     }
00601
00602     AR.CompressBuffer = (WORD *) Malloc1((AM.CompressSize+10)*sizeof(WORD),"compresssize");
00603     AR.ComprTop = AR.CompressBuffer + AM.CompressSize;
00604     AR.CompareRoutine = (COMPAREDUMMY) (&Compare1);
00605 /*
00606     Here we make all allocations for the struct AT
00607     (which is AB[identity].T or B->T with B = AB+identity).
00608 */
00609     AT.WorkSpace = (WORD *) Malloc1(AM.WorkSize*sizeof(WORD),"WorkSpace");
00610     AT.WorkTop = AT.WorkSpace + AM.WorkSize;
00611     AT.WorkPointer = AT.WorkSpace;
00612
00613     AT.Nest = (NESTING) Malloc1((LONG) sizeof(struct NeStIng)*AM.maxFlevels,"functionlevels");
00614     AT.NestStop = AT.Nest + AM.maxFlevels;
00615     AT.NestPoin = AT.Nest;
00616
00617     AT.WildMask = (WORD *) Malloc1((LONG) AM.MaxWildcards*sizeof(WORD),"maxwildcards");
00618
00619     LOCK(availabilitylock);
00620     AT.ebufnum = inicbufs(); /* Buffer for extras during execution */
00621     AT.fbufnum = inicbufs(); /* Buffer for caching in factorization */
00622     AT.allbufnum = inicbufs(); /* Buffer for id,all */
00623     AT.aebufnum = inicbufs(); /* Buffer for id,all */
00624     UNLOCK(availabilitylock);
00625
00626     AT.RepCount = (int *) Malloc1((LONG) ((AM.RepMax+3)*sizeof(int)),"repeat buffers");
00627     AN.RepPoint = AT.RepCount;
00628     AN.polysortflag = 0;
00629     AN.subsubveto = 0;
00630     AN.tryterm = 0;
00631     AT.RepTop = AT.RepCount + AM.RepMax;
00632
00633     AT.WildArgTaken = (WORD *) Malloc1((LONG) AC.WildcardBufferSize*sizeof(WORD)/2
00634         ,"argument list names");
00635     AT.WildcardBufferSize = AC.WildcardBufferSize;
00636     AT.previousEfactor = 0;
00637
00638     AT.identity = identity;
00639     AT.LoadBalancing = 0;
00640 /*
00641     Still to do: the SS stuff.
00642         the Fscr[3]
00643         the FoStage4[2]
00644 */
00645     if ( AT.WorkSpace == 0 ||
00646         AT.Nest == 0 ||
00647         AT.WildMask == 0 ||
00648         AT.RepCount == 0 ||
00649         AT.WildArgTaken == 0 ) goto OnError;
00650 /*
00651     And initializations
00652 */
00653     AT.comsym[0] = 8;
00654     AT.comsym[1] = SYMBOL;
00655     AT.comsym[2] = 4;
00656     AT.comsym[3] = 0;

```

```

00657     AT.comsym[4] = 1;
00658     AT.comsym[5] = 1;
00659     AT.comsym[6] = 1;
00660     AT.comsym[7] = 3;
00661     AT.comnum[0] = 4;
00662     AT.comnum[1] = 1;
00663     AT.comnum[2] = 1;
00664     AT.comnum[3] = 3;
00665     AT.comfun[0] = FUNHEAD+4;
00666     AT.comfun[1] = FUNCTION;
00667     AT.comfun[2] = FUNHEAD;
00668     AT.comfun[3] = 0;
00669     #if FUNHEAD > 3
00670         for ( i = 4; i <= FUNHEAD; i++ )
00671             AT.comfun[i] = 0;
00672     #endif
00673     AT.comfun[FUNHEAD+1] = 1;
00674     AT.comfun[FUNHEAD+2] = 1;
00675     AT.comfun[FUNHEAD+3] = 3;
00676     AT.comind[0] = 7;
00677     AT.comind[1] = INDEX;
00678     AT.comind[2] = 3;
00679     AT.comind[3] = 0;
00680     AT.comind[4] = 1;
00681     AT.comind[5] = 1;
00682     AT.comind[6] = 3;
00683     AT.locwildvalue[0] = SUBEXPRESSION;
00684     AT.locwildvalue[1] = SUBEXPSIZE;
00685     for ( i = 2; i < SUBEXPSIZE; i++ ) AT.locwildvalue[i] = 0;
00686     AT.mulpat[0] = TYPMULT;
00687     AT.mulpat[1] = SUBEXPSIZE+3;
00688     AT.mulpat[2] = 0;
00689     AT.mulpat[3] = SUBEXPRESSION;
00690     AT.mulpat[4] = SUBEXPSIZE;
00691     AT.mulpat[5] = 0;
00692     AT.mulpat[6] = 1;
00693     for ( i = 7; i < SUBEXPSIZE+5; i++ ) AT.mulpat[i] = 0;
00694     AT.proexp[0] = SUBEXPSIZE+4;
00695     AT.proexp[1] = EXPRESSION;
00696     AT.proexp[2] = SUBEXPSIZE;
00697     AT.proexp[3] = -1;
00698     AT.proexp[4] = 1;
00699     for ( i = 5; i < SUBEXPSIZE+1; i++ ) AT.proexp[i] = 0;
00700     AT.proexp[SUBEXPSIZE+1] = 1;
00701     AT.proexp[SUBEXPSIZE+2] = 1;
00702     AT.proexp[SUBEXPSIZE+3] = 3;
00703     AT.proexp[SUBEXPSIZE+4] = 0;
00704     AT.dummysubexp[0] = SUBEXPRESSION;
00705     AT.dummysubexp[1] = SUBEXPSIZE+4;
00706     for ( i = 2; i < SUBEXPSIZE; i++ ) AT.dummysubexp[i] = 0;
00707     AT.dummysubexp[SUBEXPSIZE] = WILDDUMMY;
00708     AT.dummysubexp[SUBEXPSIZE+1] = 4;
00709     AT.dummysubexp[SUBEXPSIZE+2] = 0;
00710     AT.dummysubexp[SUBEXPSIZE+3] = 0;
00711
00712     AT.MinVecArg[0] = 7+ARGHEAD;
00713     AT.MinVecArg[ARGHEAD] = 7;
00714     AT.MinVecArg[1+ARGHEAD] = INDEX;
00715     AT.MinVecArg[2+ARGHEAD] = 3;
00716     AT.MinVecArg[3+ARGHEAD] = 0;
00717     AT.MinVecArg[4+ARGHEAD] = 1;
00718     AT.MinVecArg[5+ARGHEAD] = 1;
00719     AT.MinVecArg[6+ARGHEAD] = -3;
00720     t = AT.FunArg;
00721     *t++ = 4+ARGHEAD+FUNHEAD;
00722     for ( i = 1; i < ARGHEAD; i++ ) *t++ = 0;
00723     *t++ = 4+FUNHEAD;
00724     *t++ = 0;
00725     *t++ = FUNHEAD;
00726     for ( i = 2; i < FUNHEAD; i++ ) *t++ = 0;
00727     *t++ = 1; *t++ = 1; *t++ = 3;
00728
00729     AT.inprimelist = -1;
00730     AT.sizeprimelist = 0;
00731     AT.primelist = 0;
00732     AT.nfac = AT.nBer = 0;
00733     AT.factorials = 0;
00734     AT.bernoullis = 0;
00735     AR.wranfia = 0;
00736     AR.wranfcall = 0;
00737     AR.wranfnpair1 = NPAIR1;
00738     AR.wranfnpair2 = NPAIR2;
00739     AR.wranfseed = 0;
00740     AN.SplitScratch = 0;
00741     AN.SplitScratchSize = AN.InScratch = 0;
00742     AN.SplitScratch1 = 0;
00743     AN.SplitScratchSize1 = AN.InScratch1 = 0;

```

```

00744 /*
00745     Now the sort buffers. They depend on which thread. The master
00746     inherits the sortbuffer from AM.S0
00747 */
00748     if ( identity == 0 ) {
00749         AT.S0 = AM.S0;
00750     }
00751     else {
00752 /*
00753         For the moment we don't have special settings.
00754         They may become costly in virtual memory.
00755 */
00756         AT.S0 = AllocSort(AM.S0->LargeSize*sizeof(WORD)/numberofworkers
00757             ,AM.S0->SmallSize*sizeof(WORD)/numberofworkers
00758             ,AM.S0->SmallEsize*sizeof(WORD)/numberofworkers
00759             ,AM.S0->TermsInSmall
00760             ,AM.S0->MaxPatches
00761 /*
00762             ,AM.S0->MaxPatches/numberofworkers */
00763             ,AM.S0->MaxFpatches/numberofworkers
00764             ,AM.S0->file.POsize
00765             ,0);
00766     }
00767     AR.CompressPointer = AR.CompressBuffer;
00768 /*
00769     Install the store caches (15-aug-2006 JV)
00770 */
00771     AT.StoreCache = AT.StoreCacheAlloc = 0;
00772     if ( AM.NumStoreCaches > 0 ) {
00773         STORECACHE sa, sb;
00774         LONG size;
00775         size = sizeof(struct StOrEcAcHe)+AM.SizeStoreCache;
00776         size = ((size-1)/sizeof(size_t)+1)*sizeof(size_t);
00777         AT.StoreCacheAlloc = (STORECACHE)Malloc1(size*AM.NumStoreCaches,"StoreCaches");
00778         sa = AT.StoreCache = AT.StoreCacheAlloc;
00779         for ( i = 0; i < AM.NumStoreCaches; i++ ) {
00780             sb = (STORECACHE)(void *) ((UBYTE *)sa+size);
00781             if ( i == AM.NumStoreCaches-1 ) {
00782                 sa->next = 0;
00783             }
00784             else {
00785                 sa->next = sb;
00786             }
00787             SETBASEPOSITION(sa->position,-1);
00788             SETBASEPOSITION(sa->toppos,-1);
00789             sa = sb;
00790         }
00791     }
00792     ReserveTempFiles(2);
00793     return(B);
00794 OnError:;
00795     MLOCK(ErrorMessageLock);
00796     MesPrint("Error initializing thread %d",identity);
00797     MUNLOCK(ErrorMessageLock);
00798     Terminate(-1);
00799     return(B);
00800 }
00801
00802 /*
00803     #] InitializeOneThread :
00804     #[ FinalizeOneThread :
00805 */
00816 void FinalizeOneThread(int identity)
00817 {
00818     timerinfo[identity] = TimeCPU(1);
00819 }
00820
00821 /*
00822     #] FinalizeOneThread :
00823     #[ ClearAllThreads :
00824 */
00831 void ClearAllThreads(void)
00832 {
00833     int i;
00834     MasterWaitAll();
00835     for ( i = 1; i <= numberofworkers; i++ ) {
00836         WakeupThread(i,CLEARCLOCK);
00837     }
00838 #ifndef WITHSORTBOTS
00839     for ( i = numberofworkers+1; i <= numberofworkers+numberofsortbots; i++ ) {
00840         WakeupThread(i,CLEARCLOCK);
00841     }
00842 #endif
00843 }
00844
00845 /*
00846     #] ClearAllThreads :

```

```

00847     # [ TerminateAllThreads :
00848     /*
00855 void TerminateAllThreads(void)
00856 {
00857     int i;
00858     for ( i = 1; i <= numberofworkers; i++ ) {
00859         GetThread(i);
00860         WakeupThread(i, TERMINATETHREAD);
00861     }
00862 #ifdef WITHSORTBOTS
00863     for ( i = numberofworkers+1; i <= numberofworkers+numberofsortbots; i++ ) {
00864         WakeupThread(i, TERMINATETHREAD);
00865     }
00866 #endif
00867     for ( i = 1; i <= numberofworkers; i++ ) {
00868         pthread_join(threadpointers[i], NULL);
00869     }
00870 #ifdef WITHSORTBOTS
00871     for ( i = numberofworkers+1; i <= numberofworkers+numberofsortbots; i++ ) {
00872         pthread_join(threadpointers[i], NULL);
00873     }
00874 #endif
00875 }
00876
00877 /*
00878     #] TerminateAllThreads :
00879     # [ MakeThreadBuckets :
00880     /*
00906 int MakeThreadBuckets(int number, int par)
00907 {
00908     int i;
00909     LONG sizethreadbuckets;
00910     THREADBUCKET *thr;
00911     /*
00912     First we need a decent estimate. Not all terms should be maximal.
00913     Note that AM.MaxTer is in bytes!!!
00914     Maybe we should try to limit the size here a bit more effectively.
00915     This is a great consumer of memory.
00916     /*
00917     sizethreadbuckets = ( AC.ThreadBucketSize + 1 ) * AM.MaxTer + 2*sizeof(WORD);
00918     if ( AC.ThreadBucketSize >= 250 )     sizethreadbuckets /= 4;
00919     else if ( AC.ThreadBucketSize >= 90 )     sizethreadbuckets /= 3;
00920     else if ( AC.ThreadBucketSize >= 40 )     sizethreadbuckets /= 2;
00921     sizethreadbuckets /= sizeof(WORD);
00922
00923     if ( par == 0 ) {
00924         numthreadbuckets = 2*(number-1);
00925         threadbuckets = (THREADBUCKET **)Malloca1(numthreadbuckets*sizeof(THREADBUCKET
00926 *), "threadbuckets");
00927         freebuckets = (THREADBUCKET **)Malloca1(numthreadbuckets*sizeof(THREADBUCKET
00928 *), "threadbuckets");
00929     }
00930     if ( par > 0 ) {
00931         if ( sizethreadbuckets <= threadbuckets[0]->threadbuffersize ) return(0);
00932         for ( i = 0; i < numthreadbuckets; i++ ) {
00933             thr = threadbuckets[i];
00934             M_free(thr->deferbuffer, "deferbuffer");
00935         }
00936     }
00937     else {
00938         for ( i = 0; i < numthreadbuckets; i++ ) {
00939             threadbuckets[i] = (THREADBUCKET *)Malloca1(sizeof(THREADBUCKET), "threadbuckets");
00940             threadbuckets[i]->lock = dummylock;
00941         }
00942     }
00943     for ( i = 0; i < numthreadbuckets; i++ ) {
00944         thr = threadbuckets[i];
00945         thr->threadbuffersize = sizethreadbuckets;
00946         thr->free = BUCKETFREE;
00947         thr->deferbuffer = (POSITION *)Malloca1(2*sizethreadbuckets*sizeof(WORD)
00948             + (AC.ThreadBucketSize+1)*sizeof(POSITION), "deferbuffer");
00949         thr->threadbuffer = (WORD *) (thr->deferbuffer+AC.ThreadBucketSize+1);
00950         thr->compressbuffer = (WORD *) (thr->threadbuffer+sizethreadbuckets);
00951         thr->busy = BUCKETPREPARINGTERM;
00952         thr->usenum = thr->totnum = 0;
00953         thr->type = BUCKETDOINGTERMS;
00954     }
00955     return(0);
00956 }
00957
00958     #] MakeThreadBuckets :
00959     # [ GetTimerInfo :
00960     /*
00966 int GetTimerInfo(LONG** ti, LONG** sti)
00967 {

```

```

00968     *ti = timerinfo;
00969     *sti = sumtimerinfo;
00970 #ifdef WITHSORTBOTS
00971     return AM.totalnumberofthreads*2;
00972 #else
00973     return AM.totalnumberofthreads;
00974 #endif
00975 }
00976
00977 /*
00978     #] GetTimerInfo :
00979     #[ WriteTimerInfo :
00980 */
00981
00982 void WriteTimerInfo(LONG* ti, LONG* sti)
00983 {
00984     int i;
00985 #ifdef WITHSORTBOTS
00986     int max = AM.totalnumberofthreads*2;
00987 #else
00988     int max = AM.totalnumberofthreads;
00989 #endif
00990     for ( i=0; i<max; ++i ) {
00991         timerinfo[i] = ti[i];
00992         sumtimerinfo[i] = sti[i];
00993     }
00994 }
00995
01000 /*
01001     #] WriteTimerInfo :
01002     #[ GetWorkerTimes :
01003 */
01004 LONG GetWorkerTimes(void)
01005 {
01006     LONG retval = 0;
01007     int i;
01008     for ( i = 1; i <= numberofworkers; i++ ) retval += timerinfo[i] + sumtimerinfo[i];
01009 #ifdef WITHSORTBOTS
01010     for ( i = numberofworkers+1; i <= numberofworkers+numberofsortbots; i++ )
01011         retval += timerinfo[i] + sumtimerinfo[i];
01012 #endif
01013     return(retval);
01014 }
01015
01021 /*
01022     #] GetWorkerTimes :
01023     #[ UpdateOneThread :
01024 */
01025 int UpdateOneThread(int identity)
01026 {
01027     ALLPRIVATES *B = AB[identity], *B0 = AB[0];
01028     AR.GetFile = AR0.GetFile;
01029     AR.KeptInHold = AR0.KeptInHold;
01030     AR.CurExpr = AR0.CurExpr;
01031     AR.SortType = AC.SortType;
01032     if ( AT.WildcardBufferSize < AC.WildcardBufferSize ) {
01033         M_free(AT.WildArgTaken, "argument list names");
01034         AT.WildcardBufferSize = AC.WildcardBufferSize;
01035         AT.WildArgTaken = (WORD *)Malloc1((LONG)AC.WildcardBufferSize*sizeof(WORD)/2
01036             , "argument list names");
01037         if ( AT.WildArgTaken == 0 ) return(-1);
01038     }
01039     return(0);
01040 }
01041
01048 /*
01049     #] UpdateOneThread :
01050     #[ LoadOneThread :
01051 */
01052 int LoadOneThread(int from, int identity, THREADBUCKET *thr, int par)
01053 {
01054     WORD *t1, *t2;
01055     ALLPRIVATES *B = AB[identity], *B0 = AB[from];
01056
01057     AR.DefPosition = AR0.DefPosition;
01058     AR.NoCompress = AR0.NoCompress;
01059     AR.gzipCompress = AR0.gzipCompress;
01060     AR.BraceOn = AR0.BraceOn;
01061     AR.CurDum = AR0.CurDum;
01062     AR.DeferFlag = AR0.DeferFlag;
01063     AR.TePos = 0;
01064     AR.sLevel = AR0.sLevel;
01065     AR.Stage4Name = AR0.Stage4Name;
01066     AR.GetOneFile = AR0.GetOneFile;
01067     AR.PolyFun = AR0.PolyFun;
01068     AR.PolyFunInv = AR0.PolyFunInv;
01069     AR.PolyFunType = AR0.PolyFunType;

```

```

01083     AR.PolyFunExp = AR0.PolyFunExp;
01084     AR.PolyFunVar = AR0.PolyFunVar;
01085     AR.PolyFunPow = AR0.PolyFunPow;
01086     AR.Eside = AR0.Eside;
01087     AR.Cnumlhs = AR0.Cnumlhs;
01088 /*
01089     AR.MaxBracket = AR0.MaxBracket;
01090
01091     The compressbuffer contents are mainly relevant for keep brackets
01092     We should do this only if there is a keep brackets statement
01093     We may however still need the compressbuffer for expressions in the rhs.
01094 */
01095     if ( par >= 1 ) {
01096 /*
01097         We may not need this %%%% 7-apr-2006
01098 */
01099         t1 = AR.CompressBuffer; t2 = AR0.CompressBuffer;
01100         while ( t2 < AR0.CompressPointer ) *t1++ = *t2++;
01101         AR.CompressPointer = t1;
01102     }
01103     else {
01104         AR.CompressPointer = AR.CompressBuffer;
01105     }
01106     if ( AR.DeferFlag ) {
01107         if ( AR.infile->handle < 0 ) {
01108             AR.infile->POfill = AR0.infile->POfill;
01109         }
01110         else {
01111 /*
01112             We have to set the value of PPosition to something that will
01113             force a read in the first try.
01114 */
01115             AR.infile->POfull = AR.infile->POfill = AR.infile->PObuffer;
01116         }
01117     }
01118     if ( par == 0 ) {
01119         AN.threadbuck = thr;
01120         AN.ninterms = thr->firstterm;
01121     }
01122     else if ( par == 1 ) {
01123         WORD *tstop;
01124         t1 = thr->threadbuffer; tstop = t1 + *t1;
01125         t2 = AT.WorkPointer;
01126         while ( t1 < tstop ) *t2++ = *t1++;
01127         AN.ninterms = thr->firstterm;
01128     }
01129     AN.TeInFun = 0;
01130     AN.ncmod = AC.ncmod;
01131     AT.BrackBuf = AT0.BrackBuf;
01132     AT.bracketindexflag = AT0.bracketindexflag;
01133     AN.PolyFunTodo = 0;
01134 /*
01135     The relevant variables and the term are in their place.
01136     There is nothing more to do.
01137 */
01138     return(0);
01139 }
01140
01141 /*
01142 #] LoadOneThread :
01143 #[ BalanceRunThread :
01144 */
01145 int BalanceRunThread(PHEAD int identity, WORD *term, WORD level)
01146 {
01147     GETBIDENTITY
01148     ALLPRIVATES *BB;
01149     WORD *t, *tt;
01150     int i, *ti, *tti;
01151
01152     LoadOneThread(AT.identity,identity,0,2);
01153 /*
01154     Extra loading if needed. Quantities changed in Generator.
01155     Like the level that has to be passed.
01156 */
01157     BB = AB[identity];
01158     BB->R.level = level;
01159     BB->T.TMbuff = AT.TMbuff;
01160     ti = AT.RepCount; tti = BB->T.RepCount;
01161     i = AN.RepPoint - AT.RepCount;
01162     BB->N.RepPoint = BB->T.RepCount + i;
01163     for ( ; i >= 0; i-- ) tti[i] = ti[i];
01164
01165     t = term; i = *term;
01166     tt = BB->T.WorkSpace;
01167     NCOPY(tt,t,i);
01168     BB->T.WorkPointer = tt;

```



```

01185
01186     WakeupThread(identity,HIGHERLEVELGENERATION);
01187
01188     return(0);
01189 }
01190
01191 /*
01192     #] BalanceRunThread :
01193     #[ SetWorkerFiles :
01194 */
01199 void SetWorkerFiles(void)
01200 {
01201     int id;
01202     ALLPRIVATES *B, *B0 = AB[0];
01203     for ( id = 1; id < AM.totalnumberofthreads; id++ ) {
01204         B = AB[id];
01205         AR.infile = &(AR.Fscr[0]);
01206         AR.outfile = &(AR.Fscr[1]);
01207         AR.hidefile = &(AR.Fscr[2]);
01208         AR.infile->handle = AR0.infile->handle;
01209         AR.hidefile->handle = AR0.hidefile->handle;
01210         if ( AR.infile->handle < 0 ) {
01211             AR.infile->PObuffer = AR0.infile->PObuffer;
01212             AR.infile->PStop = AR0.infile->PStop;
01213             AR.infile->POfill = AR0.infile->POfill;
01214             AR.infile->POfull = AR0.infile->POfull;
01215             AR.infile->POsize = AR0.infile->POsize;
01216             AR.InInBuf = AR0.InInBuf;
01217             AR.infile->POposition = AR0.infile->POposition;
01218             AR.infile->filesize = AR0.infile->filesize;
01219         }
01220         else {
01221             AR.infile->PObuffer = AR.infile->wPObuffer;
01222             AR.infile->PStop = AR.infile->wPStop;
01223             AR.infile->POfill = AR.infile->wPOfill;
01224             AR.infile->POfull = AR.infile->wPOfull;
01225             AR.infile->POsize = AR.infile->wPOsize;
01226             AR.InInBuf = 0;
01227             PUTZERO(AR.infile->POposition);
01228         }
01229     /*
01230         If there is some writing, it better happens to ones own outfile.
01231         Currently this is to be done only for InParallel.
01232         Merging of the outputs is then done by the CopyExpression routine.
01233     */
01234     {
01235         AR.outfile->PObuffer = AR.outfile->wPObuffer;
01236         AR.outfile->PStop = AR.outfile->wPStop;
01237         AR.outfile->POfill = AR.outfile->wPOfill;
01238         AR.outfile->POfull = AR.outfile->wPOfull;
01239         AR.outfile->POsize = AR.outfile->wPOsize;
01240         PUTZERO(AR.outfile->POposition);
01241     }
01242     if ( AR.hidefile->handle < 0 ) {
01243         AR.hidefile->PObuffer = AR0.hidefile->PObuffer;
01244         AR.hidefile->PStop = AR0.hidefile->PStop;
01245         AR.hidefile->POfill = AR0.hidefile->POfill;
01246         AR.hidefile->POfull = AR0.hidefile->POfull;
01247         AR.hidefile->POsize = AR0.hidefile->POsize;
01248         AR.InHiBuf = AR0.InHiBuf;
01249         AR.hidefile->POposition = AR0.hidefile->POposition;
01250         AR.hidefile->filesize = AR0.hidefile->filesize;
01251     }
01252     else {
01253         AR.hidefile->PObuffer = AR.hidefile->wPObuffer;
01254         AR.hidefile->PStop = AR.hidefile->wPStop;
01255         AR.hidefile->POfill = AR.hidefile->wPOfill;
01256         AR.hidefile->POfull = AR.hidefile->wPOfull;
01257         AR.hidefile->POsize = AR.hidefile->wPOsize;
01258         AR.InHiBuf = 0;
01259         PUTZERO(AR.hidefile->POposition);
01260     }
01261 }
01262 if ( AR0.StoreData.dirtyflag ) {
01263     for ( id = 1; id < AM.totalnumberofthreads; id++ ) {
01264         B = AB[id];
01265         AR.StoreData = AR0.StoreData;
01266     }
01267 }
01268 }
01269
01270 /*
01271     #] SetWorkerFiles :
01272     #[ RunThread :
01273 */
01281 void *RunThread(void *dummy)
01282 {

```

```

01283     WORD *term, *ttin, *tt, *ttco, *oldwork;
01284     int identity, wakeupsignal, identityretv, i, toberelased, errorcode;
01285     ALLPRIVATES *B;
01286     THREADBUCKET *thr;
01287     POSITION *ppdef;
01288     EXPRESSIONS e;
01289     DUMMYUSE(dummy);
01290     identity = SetIdentity(&identityretv);
01291     threadpointers[identity] = pthread_self();
01292     B = InitializeOneThread(identity);
01293     while ( ( wakeupsignal = ThreadWait(identity) ) > 0 ) {
01294         switch ( wakeupsignal ) {
01295             /*
01296              *
01297              */
01298             case STARTNEWEXPRESSION:
01299                 /*
01300                  *
01301                  * Set up the sort routines etc.
01302                  * Start with getting some buffers synchronized with the compiler
01303                  */
01303                 if ( UpdateOneThread(identity) ) {
01304                     MLOCK(ErrorMessageLock);
01305                     MesPrint("Update error in starting expression in thread %d in module
01306 %d",identity,AC.CModule);
01307                     MUNLOCK(ErrorMessageLock);
01308                     Terminate(-1);
01309                 }
01310                 AR.DeferFlag = AC.ComDefer;
01311                 AR.sLevel = AS.sLevel;
01312                 AR.MaxDum = AM.IndDum;
01313                 AR.expchanged = AB[0]->R.expchanged;
01314                 AR.expflags = AB[0]->R.expflags;
01315                 AR.PolyFun = AB[0]->R.PolyFun;
01316                 AR.PolyFunInv = AB[0]->R.PolyFunInv;
01317                 AR.PolyFunType = AB[0]->R.PolyFunType;
01318                 AR.PolyFunExp = AB[0]->R.PolyFunExp;
01319                 AR.PolyFunVar = AB[0]->R.PolyFunVar;
01320                 AR.PolyFunPow = AB[0]->R.PolyFunPow;
01321             /*
01322              *
01323              * Now fire up the sort buffer.
01324              */
01325             NewSort (BHEAD0);
01326             break;
01327             /*
01328              *
01329              */
01330             case LOWESTLEVELGENERATION:
01331                 #ifdef INNERTEST
01332                 if ( AC.InnerTest ) {
01333                     if ( StrCmp(AC.TestValue, (UBYTE *)INNERTEST) == 0 ) {
01334                         MesPrint("Testing(Worker%d): value = %s",AT.identity,AC.TestValue);
01335                     }
01336                 }
01337             #endif
01338                 e = Expressions + AR.CurExpr;
01339                 thr = AN.threadbuck;
01340                 ppdef = thr->deferbuffer;
01341                 ttin = thr->threadbuffer;
01342                 ttco = thr->compressbuffer;
01343                 term = AT.WorkPointer;
01344                 thr->usenum = 0;
01345                 toberelased = 0;
01346                 AN.inputnumber = thr->firstterm;
01347                 AN.ninterms = thr->firstterm;
01348                 do {
01349                     thr->usenum++; /* For if the master wants to steal the bucket */
01350                     tt = term; i = *ttin;
01351                     NCOPY(tt,ttin,i);
01352                     AT.WorkPointer = tt;
01353                     if ( AR.DeferFlag ) {
01354                         tt = AR.CompressBuffer; i = *ttco;
01355                         NCOPY(tt,ttco,i);
01356                         AR.CompressPointer = tt;
01357                         AR.DefPosition = ppdef[0]; ppdef++;
01358                     }
01359                     if ( thr->free == BUCKETTERMINATED ) {
01360                         /*
01361                          *
01362                          * The next statement allows the master to steal the bucket
01363                          * for load balancing purposes. We do still execute the current
01364                          * term, but afterwards we drop out.
01365                          * Once we have written the release code, we cannot use this
01366                          * bucket anymore. Hence the exit to the label bucketstolen.
01367                          */
01368                         if ( thr->usenum == thr->totnum ) {
01369                             thr->free = BUCKETCOMINGFREE;
01370                         }

```

```

01369         else {
01370             thr->free = BUCKETRELEASED;
01371             tobereleased = 1;
01372         }
01373     }
01374     /*
01375         What if we want to steal and we set thr->free while
01376         the thread is inside the next code for a long time?
01377     if ( AT.LoadBalancing ) {
01378     */
01379         LOCK(thr->lock);
01380         thr->busy = BUCKETDOINGTERM;
01381         UNLOCK(thr->lock);
01382     /*
01383     }
01384     else {
01385         thr->busy = BUCKETDOINGTERM;
01386     }
01387     */
01388     AN.RepPoint = AT.RepCount + 1;
01389
01390     if ( ( e->vflags & ISFACTORIZED ) != 0 && term[1] == HAAKJE ) {
01391         StoreTerm(BHEAD term);
01392     }
01393     else {
01394         if ( AR.DeferFlag ) {
01395             AR.CurDum = AN.IndDum = Expressions[AR.CurExpr].numdummies + AM.IndDum;
01396         }
01397         else {
01398             AN.IndDum = AM.IndDum;
01399             AR.CurDum = ReNumber(BHEAD term);
01400         }
01401         if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMFLAG);
01402         if ( AN.ncmod ) {
01403             if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
01404             else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
01405         }
01406         else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
01407         if ( ( AP.PreDebug & THREADSDEBUG ) != 0 ) {
01408             MLOCK(ErrorMessageLock);
01409             MesPrint("Thread %w executing term:");
01410             PrintTerm(term,"LLG");
01411             MUNLOCK(ErrorMessageLock);
01412         }
01413         if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
01414             && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
01415             PolyFunClean(BHEAD term);
01416         }
01417         if ( Generator(BHEAD term,0) ) {
01418             LowerSortLevel();
01419             MLOCK(ErrorMessageLock);
01420             MesPrint("Error in processing one term in thread %d in module
01421 %d",identity,AC.CModule);
01421             MUNLOCK(ErrorMessageLock);
01422             Terminate(-1);
01423         }
01424         AN.ninterms++;
01425     }
01426     /*
01427     if ( AT.LoadBalancing ) { */
01428         LOCK(thr->lock);
01429         thr->busy = BUCKETPREPARINGTERM;
01430         UNLOCK(thr->lock);
01431     /*
01432     }
01433     else {
01434         thr->busy = BUCKETPREPARINGTERM;
01435     }
01436     */
01437     if ( thr->free == BUCKETTERMINATED ) {
01438         if ( thr->usenum == thr->totnum ) {
01439             thr->free = BUCKETCOMINGFREE;
01440         }
01441         else {
01442             thr->free = BUCKETRELEASED;
01443             tobereleased = 1;
01444         }
01445     }
01446     if ( tobereleased ) goto bucketstolen;
01447     } while ( *ttin );
01448     thr->free = BUCKETCOMINGFREE;
01449     bucketstolen:;
01450     /*
01451     if ( AT.LoadBalancing ) { */
01452         LOCK(thr->lock);
01453         thr->busy = BUCKETTOBERELEASED;
01454         UNLOCK(thr->lock);
01455     }
01456     /*
01457     }
01458     else {

```

```

01455             thr->busy = BUCKETTOBERELEASED;
01456         }
01457     */
01458     AT.WorkPointer = term;
01459     break;
01460 /*
01461     #] LOWESTLEVELGENERATION :
01462     #[ FINISHEXPRESSION :
01463 */
01464 #ifdef WITHSORTBOTS
01465     case CLAIMOUTPUT:
01466         LOCK(AT.SB.MasterBlockLock[1]);
01467         break;
01468 #endif
01469     case FINISHEXPRESSION:
01470 /*
01471         Finish the sort
01472
01473         Start with claiming the first block
01474         Once we have claimed it we can let the master know that
01475         everything is all right.
01476 */
01477         LOCK(AT.SB.MasterBlockLock[1]);
01478         ThreadClaimedBlock(identity);
01479 /*
01480         Entry for when we work with sortbots
01481 */
01482 #ifdef WITHSORTBOTS
01483         /* fall through */
01484         case FINISHEXPRESSION2:
01485 #endif
01486 /*
01487         Now we may need here an fsync on the sort file
01488 */
01489         if ( AC.ThreadSortFileSynch ) {
01490             if ( AT.S0->file.handle >= 0 ) {
01491                 SynchFile(AT.S0->file.handle);
01492             }
01493         }
01494         AT.SB.FillBlock = 1;
01495         AT.SB.MasterFill[1] = AT.SB.MasterStart[1];
01496         errorcode = EndSort(BHEAD AT.S0->sBuffer,0);
01497         UNLOCK(AT.SB.MasterBlockLock[AT.SB.FillBlock]);
01498         UpdateMaxSize();
01499         if ( errorcode ) {
01500             MLOCK(ErrorMessageLock);
01501             MesPrint("Error terminating sort in thread %d in module %d",identity,AC.CModule);
01502             MUNLOCK(ErrorMessageLock);
01503             Terminate(-1);
01504         }
01505         break;
01506 /*
01507     #] FINISHEXPRESSION :
01508     #[ CLEANUPEXPRESSION :
01509 */
01510     case CLEANUPEXPRESSION:
01511 /*
01512         Cleanup everything and wait for the next expression
01513 */
01514         if ( AR.outfile->handle >= 0 ) {
01515             CloseFile(AR.outfile->handle);
01516             AR.outfile->handle = -1;
01517             remove(AR.outfile->name);
01518             AR.outfile->POfill = AR.outfile->POfull = AR.outfile->PObuffer;
01519             PUTZERO(AR.outfile->POposition);
01520             PUTZERO(AR.outfile->filesize);
01521         }
01522         else {
01523             AR.outfile->POfill = AR.outfile->POfull = AR.outfile->PObuffer;
01524             PUTZERO(AR.outfile->POposition);
01525             PUTZERO(AR.outfile->filesize);
01526         }
01527     {
01528         CBUF *C = cbuf+AT.ebufnum;
01529         WORD **w, ii;
01530         if ( C->numrhs > 0 || C->numlhs > 0 ) {
01531             if ( C->rhs ) {
01532                 w = C->rhs; ii = C->numrhs;
01533                 do { *w++ = 0; } while ( --ii > 0 );
01534             }
01535             if ( C->lhs ) {
01536                 w = C->lhs; ii = C->numlhs;
01537                 do { *w++ = 0; } while ( --ii > 0 );
01538             }
01539             C->numlhs = C->numrhs = 0;
01540             ClearTree(AT.ebufnum);
01541             C->Pointer = C->Buffer;

```

```

01542         }
01543     }
01544     break;
01545 /*
01546     #] CLEANUPEXPRESSION :
01547     #[ HIGHERLEVELGENERATION :
01548 */
01549     case HIGHERLEVELGENERATION:
01550 /*
01551         When foliating halfway the tree.
01552         This should only be needed in a second level load balancing
01553 */
01554         term = AT.WorkSpace; AT.WorkPointer = term + *term;
01555         if ( Generator(BHEAD term,AR.level) ) {
01556             LowerSortLevel();
01557             MLOCK(ErrorMessageLock);
01558             MesPrint("Error in load balancing one term at level %d in thread %d in module
01559 %d",AR.level,AT.identity,AC.CModule);
01560             MUNLOCK(ErrorMessageLock);
01561             Terminate(-1);
01562         }
01563         AT.WorkPointer = term;
01564         break;
01565 /*
01566     #] HIGHERLEVELGENERATION :
01567     #[ STARTNEWMODULE :
01568 */
01569     case STARTNEWMODULE:
01570 /*
01571         For resetting variables.
01572 */
01573         SpecialCleanup(B);
01574         break;
01575 /*
01576     #] STARTNEWMODULE :
01577     #[ TERMINATETHREAD :
01578 */
01579     case TERMINATETHREAD:
01580         goto EndOfThread;
01581 /*
01582     #] TERMINATETHREAD :
01583     #[ DOONEEXPRESSION :
01584 */
01585         When a thread has to do a complete (not too big) expression.
01586         The number of the expression to be done is in AR.exprtodo.
01587         The code is mostly taken from Processor. The only difference
01588         is with what to do with the output.
01589         The output should go to the scratch buffer of the worker
01590         (which is free at the right moment). If this buffer is too
01591         small we have a problem. We could write to file or give the
01592         master what we have and from now on the master has to collect
01593         pieces until things are complete.
01594         Note: this assumes that the expressions don't keep their order.
01595         If they have to keep their order, don't use this feature.
01596 */
01597     case DOONEEXPRESSION: {
01598         POSITION position, outposition;
01599         FILEHANDLE *fi, *fout, *oldoutfile;
01600         LONG dd = 0;
01601         WORD oldBracketOn = AR.BracketOn;
01602         WORD *oldBrackBuf = AT.BrackBuf;
01603         WORD oldbracketindexflag = AT.bracketindexflag;
01604         WORD fromspectator = 0;
01605         e = Expressions + AR.exprtodo;
01606         i = AR.exprtodo;
01607         AR.CurExpr = i;
01608         AR.SortType = AC.SortType;
01609         AR.expchanged = 0;
01610         if ( ( e->vflags & ISFACTORIZED ) != 0 ) {
01611             AR.BracketOn = 1;
01612             AT.BrackBuf = AM.BracketFactors;
01613             AT.bracketindexflag = 1;
01614         }
01615         position = AS.OldOnFile[i];
01616         if ( e->status == HIDDENLEXPRESSION || e->status == HIDDENGEEXPRESSION
01617             || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEEXPRESSION ) {
01618             AR.GetFile = 2; fi = AR.hidefile;
01619         }
01620         else {
01621             AR.GetFile = 0; fi = AR.infile;
01622         }
01623         PUTZERO(fi->PPosition);
01624         if ( fi->handle >= 0 ) {
01625             fi->POfill = fi->POfull = fi->PObuffer;

```

```

01628     }
01629  */
01630     SetScratch(fi,&position);
01631     term = oldwork = AT.WorkPointer;
01632     AR.CompressPointer = AR.CompressBuffer;
01633     AR.CompressPointer[0] = 0;
01634     AR.KeptInHold = 0;
01635     if ( GetTerm(BHEAD term) <= 0 ) {
01636         MLOCK(ErrorMessageLock);
01637         MesPrint("Expression %d has problems in scratchfile (t)",i);
01638         MUNLOCK(ErrorMessageLock);
01639         Terminate(-1);
01640     }
01641     if ( AT.bracketindexflag > 0 ) OpenBracketIndex(i);
01642     term[3] = i;
01643     if ( term[5] < 0 ) {
01644         fromspectator = -term[5];
01645         PUTZERO(AM.SpectatorFiles[fromspectator-1].readpos);
01646         term[5] = AC.cbufnum;
01647     }
01648     PUTZERO(outposition);
01649     fout = AR.outfile;
01650     fout->POfill = fout->POfull = fout->PObuffer;
01651     fout->POposition = outposition;
01652     if ( fout->handle >= 0 ) {
01653         fout->POposition = outposition;
01654     }
01655  /*
01656     The next statement is needed because we need the system
01657     to believe that the expression is at position zero for
01658     the moment. In this worker, with no memory of other expressions,
01659     it is. This is needed for when a bracket index is made
01660     because there e->onfile is an offset. Afterwards, when the
01661     expression is written to its final location in the masters
01662     output e->onfile will get its real value.
01663  */
01664     PUTZERO(e->onfile);
01665     if ( PutOut(BHEAD term,&outposition,fout,0) < 0 ) goto ProcErr;
01666
01667     AR.DeferFlag = AC.ComDefer;
01668
01669     AR.sLevel = AB[0]->R.sLevel;
01670     term = AT.WorkPointer;
01671     NewSort(BHEAD0);
01672     AR.MaxDum = AM.IndDum;
01673     AN.ninterms = 0;
01674     if ( fromspectator ) {
01675         while ( GetFromSpectator(term,fromspectator-1) ) {
01676             AT.WorkPointer = term + *term;
01677             AN.RepPoint = AT.RepCount + 1;
01678             AN.IndDum = AM.IndDum;
01679             AR.CurDum = ReNumber(BHEAD term);
01680             if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMLAG);
01681             if ( AN.ncmod ) {
01682                 if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
01683                 else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
01684             }
01685             else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
01686             if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
01687                 && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
01688                 PolyFunClean(BHEAD term);
01689             }
01690             if ( Generator(BHEAD term,0) ) {
01691                 LowerSortLevel(); goto ProcErr;
01692             }
01693         }
01694     }
01695     else {
01696         while ( GetTerm(BHEAD term) ) {
01697             SeekScratch(fi,&position);
01698             AN.ninterms++; dd = AN.deferskipped;
01699             if ( ( e->vflags & ISFACTORIZED ) != 0 && term[1] == HAAKJE ) {
01700                 StoreTerm(BHEAD term);
01701             }
01702             else {
01703                 if ( AC.CollectFun && *term <= (AM.MaxTer/(2*(LONG)sizeof(WORD))) ) {
01704                     if ( GetMoreTerms(term) < 0 ) {
01705                         LowerSortLevel(); goto ProcErr;
01706                     }
01707                     SeekScratch(fi,&position);
01708                 }
01709                 AT.WorkPointer = term + *term;
01710                 AN.RepPoint = AT.RepCount + 1;
01711                 if ( AR.DeferFlag ) {
01712                     AR.CurDum = AN.IndDum = Expressions[AR.exprtodo].numdummies;
01713                 }
01714             }
01715         }
01716     }

```

```

01715         AN.IndDum = AM.IndDum;
01716         AR.CurDum = ReNumber(BHEAD term);
01717     }
01718     if ( AC.SymChangeFlag ) MarkDirty(term,DIRTYSYMFLAG);
01719     if ( AN.ncmod ) {
01720         if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term,DIRTYFLAG);
01721         else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
01722     }
01723     else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
01724     if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
01725         && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
01726         PolyFunClean(BHEAD term);
01727     }
01728     if ( Generator(BHEAD term,0) ) {
01729         LowerSortLevel(); goto ProcErr;
01730     }
01731     AN.ninterms += dd;
01732 }
01733 SetScratch(fi,&position);
01734 if ( fi == AR.hidefile ) {
01735     AR.InHiBuf = (fi->POfull-fi->PObuffer)
01736         -DIFBASE(position,fi->POposition)/sizeof(WORD);
01737 }
01738 else {
01739     AR.InInBuf = (fi->POfull-fi->PObuffer)
01740         -DIFBASE(position,fi->POposition)/sizeof(WORD);
01741 }
01742 }
01743 }
01744 AN.ninterms += dd;
01745 if ( EndSort(BHEAD AT.S0->sBuffer,0) < 0 ) goto ProcErr;
01746 e->numdummies = AR.MaxDum - AM.IndDum;
01747 AR.BraceOn = oldBracketOn;
01748 AT.BrackBuf = oldBrackBuf;
01749 if ( ( e->vflags & TOBEFACTORED ) != 0 )
01750     poly_factorize_expression(e);
01751 else if ( ( ( e->vflags & TOBEUNFACTORED ) != 0 )
01752     && ( ( e->vflags & ISFACTORIZED ) != 0 ) )
01753     poly_unfactorize_expression(e);
01754 if ( AT.S0->TermsLeft ) e->vflags &= ~ISZERO;
01755 else e->vflags |= ISZERO;
01756 if ( AR.expchanged == 0 ) e->vflags |= ISUNMODIFIED;
01757 if ( AT.S0->TermsLeft ) AR.expflags |= ISZERO;
01758 if ( AR.expchanged ) AR.expflags |= ISUNMODIFIED;
01759 AR.GetFile = 0;
01760 AT.bracketindexflag = oldbracketindexflag;
01761 /*
01762     Now copy the whole thing from fout to AR0.outfile
01763     Do this in one go to keep the lock occupied as short as possible
01764 */
01765 SeekScratch(fout,&outposition);
01766 LOCK(AS.outputslock);
01767 oldoutfile = AB[0]->R.outfile;
01768 if ( e->status == INTOHIDELEXPRESSION || e->status == INTOHIDEGEXPRESSION ) {
01769     AB[0]->R.outfile = AB[0]->R.hidefile;
01770 }
01771 SeekScratch(AB[0]->R.outfile,&position);
01772 e->onfile = position;
01773 if ( CopyExpression(fout,AB[0]->R.outfile) < 0 ) {
01774     AB[0]->R.outfile = oldoutfile;
01775     UNLOCK(AS.outputslock);
01776     MLOCK(ErrorMessageLock);
01777     MesPrint("Error copying output of 'InParallel' expression to master. Thread:
01778         %d",identity);
01779     MUNLOCK(ErrorMessageLock);
01780     goto ProcErr;
01781 }
01782 AB[0]->R.outfile = oldoutfile;
01783 AB[0]->R.hidefile->POfull = AB[0]->R.hidefile->POfill;
01784 AB[0]->R.expflags = AR.expflags;
01785 UNLOCK(AS.outputslock);
01786
01787 if ( fout->handle >= 0 ) { /* Now get rid of the file */
01788     CloseFile(fout->handle);
01789     fout->handle = -1;
01790     remove(fout->name);
01791     PUTZERO(fout->POposition);
01792     PUTZERO(fout->filesize);
01793     fout->POfill = fout->POfull = fout->PObuffer;
01794 }
01795 UpdateMaxSize();
01796
01797 AT.WorkPointer = oldwork;
01798 } break;
01799 /*
01800 #] DOONEEXPRESSION :

```

```

01801      #] DOBRACKETS :
01802
01803      In case we have a bracket index we can have the worker treat
01804      one or more of the entries in the bracket index.
01805      The advantage is that identical terms will meet each other
01806      sooner in the sorting and hence fewer compares will be needed.
01807      Also this way the master doesn't need to fill the buckets.
01808      The main problem is the load balancing which can become very
01809      bad when there is a long tail without things outside the bracket.
01810
01811      We get sent:
01812      1: The number of the first bracket to be done
01813      2: The number of the last bracket to be done
01814  */
01815      case DOBRACKETS: {
01816          BRACKETINFO *binfo;
01817          BRACKETINDEX *bi;
01818          FILEHANDLE *fi;
01819          POSITION stoppos, where;
01820          e = Expressions + AR.CurExpr;
01821          binfo = e->bracketinfo;
01822          thr = AN.threadbuck;
01823          bi = &(binfo->indexbuffer[thr->firstbracket]);
01824          if ( AR.GetFile == 2 ) fi = AR.hidefile;
01825          else fi = AR.infile;
01826          where = bi->start;
01827          ADD2POS(where, AS.OldOnFile[AR.CurExpr]);
01828          SetScratch(fi, &(where));
01829          stoppos = binfo->indexbuffer[thr->lastbracket].next;
01830          ADD2POS(stoppos, AS.OldOnFile[AR.CurExpr]);
01831          AN.ninterms = thr->firstterm;
01832  /*
01833      Now we have to put the 'value' of the bracket in the
01834      Compress buffer.
01835  */
01836          ttco = AR.CompressBuffer;
01837          tt = binfo->bracketbuffer + bi->bracket;
01838          i = tt;
01839          NCOPY(ttco, tt, i)
01840          AR.CompressPointer = ttco;
01841          term = AT.WorkPointer;
01842          while ( GetTerm(BHEAD term) ) {
01843              SeekScratch(fi, &where);
01844              AT.WorkPointer = term + *term;
01845              AN.IndDum = AM.IndDum;
01846              AR.CurDum = ReNumber(BHEAD term);
01847              if ( AC.SymChangeFlag ) MarkDirty(term, DIRTYSYMFLAG);
01848              if ( AN.ncmod ) {
01849                  if ( ( AC.modmode & ALSOFUNARGS ) != 0 ) MarkDirty(term, DIRTYFLAG);
01850                  else if ( AR.PolyFun ) PolyFunDirty(BHEAD term);
01851              }
01852              else if ( AC.PolyRatFunChanged ) PolyFunDirty(BHEAD term);
01853              if ( ( AR.PolyFunType == 2 ) && ( AC.PolyRatFunChanged == 0 )
01854                  && ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION ) ) {
01855                  PolyFunClean(BHEAD term);
01856              }
01857              if ( ( AP.PreDebug & THREADSDEBUG ) != 0 ) {
01858                  MLOCK(ErrorMessageLock);
01859                  MesPrint("Thread %w executing term:");
01860                  PrintTerm(term, "DoBrackets");
01861                  MUNLOCK(ErrorMessageLock);
01862              }
01863              AT.WorkPointer = term + *term;
01864              if ( Generator(BHEAD term, 0) ) {
01865                  LowerSortLevel();
01866                  MLOCK(ErrorMessageLock);
01867                  MesPrint("Error in processing one term in thread %d in module
01868                      %d", identity, AC.CModule);
01869                  MUNLOCK(ErrorMessageLock);
01870                  Terminate(-1);
01871              }
01872              AN.ninterms++;
01873              SetScratch(fi, &(where));
01874              if ( ISGEPOS(where, stoppos) ) break;
01875          }
01876          AT.WorkPointer = term;
01877          thr->free = BUCKETCOMINGFREE;
01878          break;
01879  /*
01880      #] DOBRACKETS :
01881      #] CLEARCLOCK :
01882
01883      The program only comes here after a .clear
01884  */
01885      case CLEARCLOCK:
01886  /*          LOCK(clearclocklock); */

```



```

01887         sumtimerinfo[identity] += TimeCPU(1);
01888         timerinfo[identity] = TimeCPU(0);
01889         /*
01890             UNLOCK(clearclocklock); */
01891         break;
01892     /*
01893     #] CLEARCLOCK :
01894     #[ MCTSEXPANDTREE :
01895     */
01896     case MCTSEXPANDTREE:
01897         AT.optimtimes = AB[0]->T.optimtimes;
01898         find_Horner_MCTS_expand_tree();
01899         break;
01900     /*
01901     #] MCTSEXPANDTREE :
01902     #[ OPTIMIZEEXPRESSION :
01903     */
01904     case OPTIMIZEEXPRESSION:
01905         optimize_expression_given_Horner();
01906         break;
01907     /*
01908     #] OPTIMIZEEXPRESSION :
01909     */
01910     default:
01911         MLOCK(ErrorMessageLock);
01912         MesPrint("Illegal wakeup signal %d for thread %d",wakeupsignal,identity);
01913         MUNLOCK(ErrorMessageLock);
01914         Terminate(-1);
01915         break;
01916     }
01917     /* we need the following update in case we are using checkpoints. then we
01918        need to readjust the clocks when recovering using this information */
01919     timerinfo[identity] = TimeCPU(1);
01920 }
01921 EndOfThread::;
01922 /*
01923     This is the end of the thread. We cleanup and exit.
01924     If we are using flint, call the per-thread cleanup function. This keep valgrind happy.
01925 */
01926 #ifdef WITHFLINT
01927     flint_final_cleanup_thread();
01928 #endif
01929     FinalizeOneThread(identity);
01930     return(0);
01931 ProcErr:
01932     Terminate(-1);
01933     return(0);
01934 }
01935 /*
01936     #] RunThread :
01937     #[ RunSortBot :
01938     */
01939 #ifdef WITHSORTBOTS
01940 void *RunSortBot(void *dummy)
01941 {
01942     int identity, wakeupsignal, identityretv;
01943     ALLPRIVATES *B, *BB;
01944     DUMMYUSE(dummy);
01945     identity = SetIdentity(&identityretv);
01946     threadpointers[identity] = pthread_self();
01947     B = InitializeOneThread(identity);
01948     while ( ( wakeupsignal = SortBotWait(identity) ) > 0 ) {
01949         switch ( wakeupsignal ) {
01950             /*
01951             #] INISORTBOT :
01952             */
01953             case INISORTBOT:
01954                 AR.CompressBuffer = AB[0]->R.CompressBuffer;
01955                 AR.ComprTop = AB[0]->R.ComprTop;
01956                 AR.CompressPointer = AB[0]->R.CompressPointer;
01957                 AR.CurExpr = AB[0]->R.CurExpr;
01958                 AR.PolyFun = AB[0]->R.PolyFun;
01959                 AR.PolyFunInv = AB[0]->R.PolyFunInv;
01960                 AR.PolyFunType = AB[0]->R.PolyFunType;
01961                 AR.PolyFunExp = AB[0]->R.PolyFunExp;
01962                 AR.PolyFunVar = AB[0]->R.PolyFunVar;
01963                 AR.PolyFunPow = AB[0]->R.PolyFunPow;
01964                 AR.SortType = AC.SortType;
01965                 if ( AR.PolyFun == 0 ) { AT.SS->PolyFlag = 0; }
01966                 else if ( AR.PolyFunType == 1 ) { AT.SS->PolyFlag = 1; }
01967                 else if ( AR.PolyFunType == 2 ) {
01968                     if ( AR.PolyFunExp == 2
01969                         || AR.PolyFunExp == 3 ) AT.SS->PolyFlag = 1;
01970                     else AT.SS->PolyFlag = 2;
01971                 }
01972                 AT.SS->PolyWise = 0;

```

```

01981         AN.ncmod = AC.ncmod;
01982         LOCK(AT.SB.MasterBlockLock[1]);
01983         BB = AB[AT.SortBotIn1];
01984         LOCK(BB->T.SB.MasterBlockLock[BB->T.SB.MasterNumBlocks]);
01985         BB = AB[AT.SortBotIn2];
01986         LOCK(BB->T.SB.MasterBlockLock[BB->T.SB.MasterNumBlocks]);
01987         AT.SB.FillBlock = 1;
01988         AT.SB.MasterFill[1] = AT.SB.MasterStart[1];
01989         SETBASEPOSITION(AN.theposition,0);
01990         break;
01991     /*
01992         #] INISORTBOT :
01993         #[ RUNSORTBOT :
01994     */
01995     case RUNSORTBOT:
01996         SortBotMerge(B);
01997         break;
01998     /*
01999         #] RUNSORTBOT :
02000         #[ TERMINATETHREAD :
02001     */
02002     case TERMINATETHREAD:
02003         goto EndOfThread;
02004     /*
02005         #] TERMINATETHREAD :
02006         #[ CLEARCLOCK :
02007
02008         The program only comes here after a .clear
02009     */
02010     case CLEARCLOCK:
02011         /* LOCK(clearclocklock); */
02012         sumtimerinfo[identity] += TimeCPU(1);
02013         timerinfo[identity] = TimeCPU(0);
02014         /* UNLOCK(clearclocklock); */
02015         break;
02016     /*
02017         #] CLEARCLOCK :
02018     */
02019     default:
02020         MLOCK(ErrorMessageLock);
02021         MesPrint("Illegal wakeup signal %d for thread %d",wakeupsignal,identity);
02022         MUNLOCK(ErrorMessageLock);
02023         Terminate(-1);
02024         break;
02025     }
02026 }
02027 EndOfThread;;
02028 /*
02029     This is the end of the thread. We cleanup and exit.
02030     If we are using flint, call the per-thread cleanup function. This keep valgrind happy.
02031 */
02032 #ifdef WITHFLINT
02033     flint_final_cleanup_thread();
02034 #endif
02035     FinalizeOneThread(identity);
02036     return(0);
02037 }
02038 #endif
02039
02040
02041 /*
02042     #] RunSortBot :
02043     #[ IAmAvailable :
02044 */
02045 void IAmAvailable(int identity)
02046 {
02047     int top;
02048     LOCK(availabilitylock);
02049     top = topofavailables;
02050     listofavailables[topofavailables++] = identity;
02051     if ( top == 0 ) {
02052         UNLOCK(availabilitylock);
02053         LOCK(wakeupmasterlock);
02054         wakeupmaster = identity;
02055         pthread_cond_signal(&wakeupmasterconditions);
02056         UNLOCK(wakeupmasterlock);
02057     }
02058     else {
02059         UNLOCK(availabilitylock);
02060     }
02061 }
02062
02063 /*
02064     #] IAmAvailable :
02065     #[ GetAvailableThread :
02066 */
02067 int GetAvailableThread(void)

```

```

02087 {
02088     int retval = -1;
02089     LOCK(availabilitylock);
02090     if ( topofavailables > 0 ) retval = listofavailables[--topofavailables];
02091     UNLOCK(availabilitylock);
02092     if ( retval >= 0 ) {
02093         /*
02094             Make sure the thread is indeed waiting and not between
02095             saying that it is available and starting to wait.
02096         */
02097         LOCK(wakeuplocks[retval]);
02098         UNLOCK(wakeuplocks[retval]);
02099     }
02100     return(retval);
02101 }
02102
02103 /*
02104     #] GetAvailableThread :
02105     #[ ConditionalGetAvailableThread :
02106 */
02114 int ConditionalGetAvailableThread(void)
02115 {
02116     int retval = -1;
02117     if ( topofavailables > 0 ) {
02118         LOCK(availabilitylock);
02119         if ( topofavailables > 0 ) {
02120             retval = listofavailables[--topofavailables];
02121         }
02122         UNLOCK(availabilitylock);
02123         if ( retval >= 0 ) {
02124             /*
02125                 Make sure the thread is indeed waiting and not between
02126                 saying that it is available and starting to wait.
02127             */
02128             LOCK(wakeuplocks[retval]);
02129             UNLOCK(wakeuplocks[retval]);
02130         }
02131     }
02132     return(retval);
02133 }
02134
02135 /*
02136     #] ConditionalGetAvailableThread :
02137     #[ GetThread :
02138 */
02148 int GetThread(int identity)
02149 {
02150     int retval = -1, j;
02151     LOCK(availabilitylock);
02152     for ( j = 0; j < topofavailables; j++ ) {
02153         if ( identity == listofavailables[j] ) break;
02154     }
02155     if ( j < topofavailables ) {
02156         --topofavailables;
02157         for ( ; j < topofavailables; j++ ) {
02158             listofavailables[j] = listofavailables[j+1];
02159         }
02160         retval = identity;
02161     }
02162     UNLOCK(availabilitylock);
02163     return(retval);
02164 }
02165
02166 /*
02167     #] GetThread :
02168     #[ ThreadWait :
02169 */
02179 int ThreadWait(int identity)
02180 {
02181     int retval, top, j;
02182     LOCK(wakeuplocks[identity]);
02183     LOCK(availabilitylock);
02184     top = topofavailables;
02185     for ( j = topofavailables; j > 0; j-- )
02186         listofavailables[j] = listofavailables[j-1];
02187     listofavailables[0] = identity;
02188     topofavailables++;
02189     if ( top == 0 || topofavailables == numberofworkers ) {
02190         UNLOCK(availabilitylock);
02191         LOCK(wakeupmasterlock);
02192         wakeupmaster = identity;
02193         pthread_cond_signal(&wakeupmasterconditions);
02194         UNLOCK(wakeupmasterlock);
02195     }
02196     else {
02197         UNLOCK(availabilitylock);
02198     }

```

```

02199     while ( wakeup[identity] == 0 ) {
02200         pthread_cond_wait (&(wakeupconditions[identity]), &(wakeuplocks[identity]));
02201     }
02202     retval = wakeup[identity];
02203     wakeup[identity] = 0;
02204     UNLOCK(wakeuplocks[identity]);
02205     return(retval);
02206 }
02207
02208 /*
02209  #] ThreadWait :
02210  #[ SortBotWait :
02211 */
02212
02213 #ifdef WITHSORTBOTS
02214 int SortBotWait(int identity)
02215 {
02216     int retval;
02217     LOCK(wakeuplocks[identity]);
02218     LOCK(availabilitylock);
02219     topsortbotavailables++;
02220     if ( topsortbotavailables >= numberofsortbots ) {
02221         UNLOCK(availabilitylock);
02222         LOCK(wakeupsortbotlock);
02223         wakeupmaster = identity;
02224         pthread_cond_signal (&wakeupsortbotconditions);
02225         UNLOCK(wakeupsortbotlock);
02226     }
02227     else {
02228         UNLOCK(availabilitylock);
02229     }
02230     while ( wakeup[identity] == 0 ) {
02231         pthread_cond_wait (&(wakeupconditions[identity]), &(wakeuplocks[identity]));
02232     }
02233     retval = wakeup[identity];
02234     wakeup[identity] = 0;
02235     UNLOCK(wakeuplocks[identity]);
02236     return(retval);
02237 }
02238 #endif
02239
02240 /*
02241  #] SortBotWait :
02242  #[ ThreadClaimedBlock :
02243 */
02244 int ThreadClaimedBlock(int identity)
02245 {
02246     LOCK(availabilitylock);
02247     numberclaimed++;
02248     if ( numberclaimed >= numberofworkers ) {
02249         UNLOCK(availabilitylock);
02250         LOCK(wakeupmasterlock);
02251         wakeupmaster = identity;
02252         pthread_cond_signal (&wakeupmasterconditions);
02253         UNLOCK(wakeupmasterlock);
02254     }
02255     else {
02256         UNLOCK(availabilitylock);
02257     }
02258     return(0);
02259 }
02260
02261 /*
02262  #] ThreadClaimedBlock :
02263  #[ MasterWait :
02264 */
02265 int MasterWait(void)
02266 {
02267     int retval;
02268     LOCK(wakeupmasterlock);
02269     while ( wakeupmaster == 0 ) {
02270         pthread_cond_wait (&wakeupmasterconditions, &wakeupmasterlock);
02271     }
02272     retval = wakeupmaster;
02273     wakeupmaster = 0;
02274     UNLOCK(wakeupmasterlock);
02275     return(retval);
02276 }
02277
02278 /*
02279  #] MasterWait :
02280  #[ MasterWaitThread :
02281 */
02282 int MasterWaitThread(int identity)
02283 {
02284     int retval;

```

```

02318     LOCK(wakeupmasterthreadlocks[identity]);
02319     while ( wakeupmasterthread[identity] == 0 ) {
02320         pthread_cond_wait(&(wakeupmasterthreadconditions[identity])
02321             , &(wakeupmasterthreadlocks[identity]));
02322     }
02323     retval = wakeupmasterthread[identity];
02324     wakeupmasterthread[identity] = 0;
02325     UNLOCK(wakeupmasterthreadlocks[identity]);
02326     return(retval);
02327 }
02328
02329 /*
02330  #] MasterWaitThread :
02331  #[ MasterWaitAll :
02332  */
02333 void MasterWaitAll(void)
02334 {
02341     LOCK(wakeupmasterlock);
02342     while ( topofavailables < numberofworkers ) {
02343         pthread_cond_wait(&wakeupmasterconditions,&wakeupmasterlock);
02344     }
02345     UNLOCK(wakeupmasterlock);
02346     return;
02347 }
02348
02349 /*
02350  #] MasterWaitAll :
02351  #[ MasterWaitAllSortBots :
02352  */
02353
02354 #ifdef WITHSORTBOTS
02355 void MasterWaitAllSortBots(void)
02356 {
02363     LOCK(wakeupsortbotlock);
02364     while ( topsortbotavailables < numberofsortbots ) {
02365         pthread_cond_wait(&wakeupsortbotconditions,&wakeupsortbotlock);
02366     }
02367     UNLOCK(wakeupsortbotlock);
02368     return;
02369 }
02370
02371 #endif
02372
02373 /*
02374  #] MasterWaitAllSortBots :
02375  #[ MasterWaitAllBlocks :
02376  */
02377 void MasterWaitAllBlocks(void)
02378 {
02385     LOCK(wakeupmasterlock);
02386     while ( numberclaimed < numberofworkers ) {
02387         pthread_cond_wait(&wakeupmasterconditions,&wakeupmasterlock);
02388     }
02389     UNLOCK(wakeupmasterlock);
02390     return;
02391 }
02392
02393 /*
02394  #] MasterWaitAllBlocks :
02395  #[ WakeupThread :
02396  */
02405 void WakeupThread(int identity, int signalnumber)
02406 {
02407     if ( signalnumber == 0 ) {
02408         MLOCK(ErrorMessageLock);
02409         MesPrint("Illegal wakeup signal for thread %d",identity);
02410         MUNLOCK(ErrorMessageLock);
02411         Terminate(-1);
02412     }
02413     LOCK(wakeuplocks[identity]);
02414     wakeup[identity] = signalnumber;
02415     pthread_cond_signal(&(wakeupconditions[identity]));
02416     UNLOCK(wakeuplocks[identity]);
02417 }
02418
02419 /*
02420  #] WakeupThread :
02421  #[ WakeupMasterFromThread :
02422  */
02431 void WakeupMasterFromThread(int identity, int signalnumber)
02432 {
02433     if ( signalnumber == 0 ) {
02434         MLOCK(ErrorMessageLock);
02435         MesPrint("Illegal wakeup signal for master %d",identity);
02436         MUNLOCK(ErrorMessageLock);
02437         Terminate(-1);

```

```

02438     }
02439     LOCK(wakeupmasterthreadlocks[identity]);
02440     wakeupmasterthread[identity] = signalnumber;
02441     pthread_cond_signal(&(wakeupmasterthreadconditions[identity]));
02442     UNLOCK(wakeupmasterthreadlocks[identity]);
02443 }
02444
02445 /*
02446  #] WakeupMasterFromThread :
02447  #[ SendOneBucket :
02448 */
02449 int SendOneBucket(int type)
02450 {
02451     ALLPRIVATES *B0 = AB[0];
02452     THREADBUCKET *thr = 0;
02453     int j, k, id;
02454     for ( j = 0; j < numthreadbuckets; j++ ) {
02455         if ( threadbuckets[j]->free == BUCKETFILLED ) {
02456             thr = threadbuckets[j];
02457             for ( k = j+1; k < numthreadbuckets; k++ )
02458                 threadbuckets[k-1] = threadbuckets[k];
02459             threadbuckets[numthreadbuckets-1] = thr;
02460             break;
02461         }
02462     }
02463     AN0.ninterms++;
02464     while ( ( id = GetAvailableThread() ) < 0 ) { MasterWait(); }
02465 /*
02466  Prepare the thread. Give it the term and variables.
02467 */
02468     LoadOneThread(0,id,thr,0);
02469     thr->busy = BUCKETASSIGNED;
02470     thr->free = BUCKETINUSE;
02471     numberoffullbuckets--;
02472 /*
02473  And signal the thread to run.
02474  Form now on we may only interfere with this bucket
02475  1: after it has been marked BUCKETCOMINGFREE
02476  2: when thr->busy == BUCKETDOINGTERM and then only when protected by
02477     thr->lock. This would be for load balancing.
02478 */
02479     WakeupThread(id,type);
02480 /* AN0.ninterms += thr->ddterms; */
02481     return(0);
02482 }
02483
02484 /*
02485  #] SendOneBucket :
02486  #[ InParallelProcessor :
02487 */
02488 int InParallelProcessor(void)
02489 {
02490     GETIDENTITY
02491     int i, id, retval = 0, num = 0;
02492     EXPRESSIONS e;
02493     if ( numberofworkers >= 2 ) {
02494         SetWorkerFiles();
02495         for ( i = 0; i < NumExpressions; i++ ) {
02496             e = Expressions+i;
02497             if ( e->partodo <= 0 ) continue;
02498             if ( e->status == LOCALEXPRESSION || e->status == GLOBALEXPRESSION
02499                 || e->status == UNHIDELEXPRESSION || e->status == UNHIDEGEXPRESSION
02500                 || e->status == INTOHIDELEXPRESSION || e->status == INTOHIDEGEXPRESSION ) {
02501                 else {
02502                     e->partodo = 0;
02503                     continue;
02504                 }
02505             if ( e->counter == 0 ) { /* Expression with zero terms */
02506                 e->partodo = 0;
02507                 continue;
02508             }
02509             /*
02510              This expression should go to an idle worker
02511             */
02512             while ( ( id = GetAvailableThread() ) < 0 ) { MasterWait(); }
02513             LoadOneThread(0,id,0,-1);
02514             AB[id]->R.exprtudo = i;
02515             WakeupThread(id,DOONEEXPRESSION);
02516             num++;
02517         }
02518     /*
02519      Now we have to wait for all workers to finish
02520     */
02521     if ( num > 0 ) MasterWaitAll();
02522     if ( AC.CollectFun ) AR.DeferFlag = 0;

```

```

02549     }
02550     else {
02551         for ( i = 0; i < NumExpressions; i++ ) {
02552             Expressions[i].partodo = 0;
02553         }
02554     }
02555     return(retval);
02556 }
02557
02558 /*
02559  #] InParallelProcessor :
02560  #[ ThreadsProcessor :
02561 */
02562 int ThreadsProcessor(EXPRESSIONS e, WORD LastExpression, WORD fromspectator)
02563 {
02564     ALLPRIVATES *B0 = AB[0], *B = B0;
02565     int id, oldgzipCompress, endofinput = 0, j, still, k, defcount = 0, bra = 0, first = 1;
02566     LONG dd = 0, ddd, thrbufsiz, thrbufsiz0, thrbufsiz2, numbucket = 0, numpasses;
02567     LONG num, i;
02568     WORD *oldworkpointer = AT0.WorkPointer, *tt, *ttco = 0, *tl = 0, ter, *tstop = 0, *t2;
02569     THREADBUCKET *thr = 0;
02570     FILEHANDLE *oldoutfile = AR0.outfile;
02571     GETTERM GetTermP = &GetTerm;
02572     POSITION eonfile = AS.OldOnFile[e-Expressions];
02573     numberoffullbuckets = 0;
02574
02575     /*
02576      Start up all threads. The lock needs to be around the whole loop
02577      to keep processes from terminating quickly and putting themselves
02578      in the list of available threads again.
02579     */
02580     AM.tracebackflag = 1;
02581
02582     AS.sLevel = AR0.sLevel;
02583     LOCK(availabilitylock);
02584     topofavailables = 0;
02585     for ( id = 1; id <= numberofworkers; id++ ) {
02586         WakeupThread(id, STARTNEWEXPRESSION);
02587     }
02588     UNLOCK(availabilitylock);
02589     NewSort(BHEAD0);
02590     AN0.ninterms = 1;
02591
02592     /*
02593     Now for redefine
02594     */
02595     if ( AC.numpfirstnum > 0 ) {
02596         for ( j = 0; j < AC.numpfirstnum; j++ ) {
02597             AC.inputnumbers[j] = -1;
02598         }
02599     }
02600     MasterWaitAll();
02601
02602     /*
02603     Determine a reasonable bucket size.
02604     This is based on the value of AC.ThreadBucketSize and the number
02605     of terms. We want at least 5 buckets per worker at the moment.
02606     Some research should show whether this is reasonable.
02607
02608     The number of terms in the expression is in e->counter
02609     */
02610     thrbufsiz2 = thrbufsiz = AC.ThreadBucketSize-1;
02611     if ( ( e->counter / ( numberofworkers * 5 ) ) < thrbufsiz ) {
02612         thrbufsiz = e->counter / ( numberofworkers * 5 ) - 1;
02613         if ( thrbufsiz < 0 ) thrbufsiz = 0;
02614     }
02615     thrbufsiz0 = thrbufsiz;
02616     numpasses = 5; /* this is just for trying */
02617     thrbufsiz = thrbufsiz0 / ( 2 << numpasses );
02618
02619     /*
02620     Mark all buckets as free and take the first.
02621     */
02622     for ( j = 0; j < numthreadbuckets; j++ )
02623         threadbuckets[j]->free = BUCKETFREE;
02624     thr = threadbuckets[0];
02625
02626     /*
02627     #[ Whole brackets :
02628
02629     First we look whether we have to work with entire brackets
02630     This is the case when there is a non-NULL address in e->bracketinfo.
02631     Of course we shouldn't have interference from a collect or keep statement.
02632     */
02633     #ifdef WHOLEBRACKETS
02634     if ( e->bracketinfo && AC.CollectFun == 0 && AR0.DeferFlag == 0 ) {
02635         FILEHANDLE *curfile;
02636         int didone = 0;
02637         LONG num, n;
02638         AN0.expr = e;
02639         for ( n = 0; n < e->bracketinfo->indexfill; n++ ) {
02640             num = TreatIndexEntry(B0,n);
02641         }
02642     }
02643     #endif
02644 }

```

```

02660         if ( num > 0 ) {
02661             didone = 1;
02662         /*
02663             This bracket can be sent off.
02664             1: Look for an empty bucket
02665         */
02666         ReTry;;
02667         for ( j = 0; j < numthreadbuckets; j++ ) {
02668             switch ( threadbuckets[j]->free ) {
02669                 case BUCKETFREE:
02670                     thr = threadbuckets[j];
02671                     goto Found1;
02672                 case BUCKETCOMINGFREE:
02673                     thr = threadbuckets[j];
02674                     thr->free = BUCKETFREE;
02675                     for ( k = j+1; k < numthreadbuckets; k++ )
02676                         threadbuckets[k-1] = threadbuckets[k];
02677                     threadbuckets[numthreadbuckets-1] = thr;
02678                     j--;
02679                     break;
02680                 default:
02681                     break;
02682             }
02683         }
02684         Found1;;
02685         if ( j < numthreadbuckets ) {
02686             /*
02687                 Found an empty bucket. Fill it.
02688             */
02689             thr->firstbracket = n;
02690             thr->lastbracket = n + num - 1;
02691             thr->type = BUCKETDOINGBRACKET;
02692             thr->free = BUCKETFILLED;
02693             thr->firstterm = AN0.ninterms;
02694             for ( j = n; j < n+num; j++ ) {
02695                 AN0.ninterms += e->bracketinfo->indexbuffer[j].termsinbracket;
02696             }
02697             n += num-1;
02698             numberoffullbuckets++;
02699             if ( topofavailables > 0 ) {
02700                 SendOneBucket(DOBRACKETS);
02701             }
02702         }
02703         /*
02704             All buckets are in use.
02705             Look/wait for an idle worker. Give it a bucket.
02706             After that, retry for a bucket
02707         */
02708         else {
02709             while ( topofavailables <= 0 ) {
02710                 MasterWait();
02711             }
02712             SendOneBucket(DOBRACKETS);
02713             goto ReTry;
02714         }
02715     }
02716 }
02717 if ( didone ) {
02718     /*
02719         And now put the input back in the original position.
02720     */
02721     switch ( e->status ) {
02722         case UNHIDELEXPRESSION:
02723         case UNHIDEGEXPRESSION:
02724         case DROPHLEXPRESSION:
02725         case DROPHGEXPRESSION:
02726         case HIDDENLEXPRESSION:
02727         case HIDDENGEXPRESSION:
02728             curfile = AR0.hidefile;
02729             break;
02730         default:
02731             curfile = AR0.infile;
02732             break;
02733     }
02734     SetScratch(curfile,&eonfile);
02735     GetTerm(B0,AT0.WorkPointer);
02736     /*
02737         Now we point the GetTerm that is used to the one that is selective
02738     */
02739     GetTermP = &GetTerm2;
02740     /*
02741         Next wait till there is a bucket available and initialize thr to it.
02742     */
02743     for(;;) {
02744         for ( j = 0; j < numthreadbuckets; j++ ) {
02745             switch ( threadbuckets[j]->free ) {
02746                 case BUCKETFREE:

```



```

02747         thr = threadbuckets[j];
02748         goto Found2;
02749     case BUCKETCOMINGFREE:
02750         thr = threadbuckets[j];
02751         thr->free = BUCKETFREE;
02752         for ( k = j+1; k < numthreadbuckets; k++ )
02753             threadbuckets[k-1] = threadbuckets[k];
02754         threadbuckets[numthreadbuckets-1] = thr;
02755         j--;
02756         break;
02757     default:
02758         break;
02759     }
02760     while ( topofavailables <= 0 ) {
02761         MasterWait();
02762     }
02763     while ( topofavailables > 0 && numberoffullbuckets > 0 ) {
02764         SendOneBucket (DOBRACKETS);
02765     }
02766 }
02767 Found2:;
02768 while ( numberoffullbuckets > 0 ) {
02769     while ( topofavailables <= 0 ) {
02770         MasterWait();
02771     }
02772     while ( topofavailables > 0 && numberoffullbuckets > 0 ) {
02773         SendOneBucket (DOBRACKETS);
02774     }
02775 }
02776
02777 /*
02778     Disable the 'warming up' with smaller buckets.
02779
02780     numpasses = 0;
02781     thrbufsiz = thrbufsiz0;
02782 */
02783     AN0.lastinindex = -1;
02784 }
02785 MasterWaitAll();
02786 }
02787 #endif
02788 /*
02789     #] Whole brackets :
02790
02791     Now the loop to start a bucket
02792 */
02793     for(;;) {
02794         if ( fromspectator ) {
02795             ter = GetFromSpectator(thr->threadbuffer,fromspectator-1);
02796             if ( ter == 0 ) fromspectator = 0;
02797         }
02798         else {
02799             ter = GetTermP(B0,thr->threadbuffer);
02800         }
02801         /*
02802             At this point we could check whether the input term is
02803             just an expression that resides in a scratch file.
02804             If this is the case we should store the current input info
02805             (file and buffer content) and redirect the input.
02806             At the end we can go back to where we were.
02807             There are two possibilities: we are in the same scratchfile
02808             as the main input and the other expression is still in the
02809             input buffer, or we have to do some reading. The reading is
02810             of course done in GetTerm.
02811
02812             How to set this up can also be studied in TestSub (in file proces.c)
02813             where it checks for EXPRESSION.
02814         */
02815         if ( ter < 0 ) break;
02816         if ( ter == 0 ) { endofinput = 1; goto Finalize; }
02817         dd = AN0.deferskipped;
02818         if ( AR0.DeferFlag ) {
02819             defcount = 0;
02820             thr->deferbuffer[defcount++] = AR0.DefPosition;
02821             ttco = thr->compressbuffer; t1 = AR0.CompressBuffer; j = *t1;
02822             NCOPY(ttco,t1,j);
02823         }
02824         else if ( first && ( AC.CollectFun == 0 ) ) { /* Brackets ? */
02825             first = 0;
02826             t1 = tstop = thr->threadbuffer;
02827             tstop += *tstop; tstop -= ABS(tstop[-1]);
02828             t1++;
02829             while ( t1 < tstop ) {
02830                 if ( t1[0] == HAAKJE ) { bra = 1; break; }
02831                 t1 += t1[1];
02832             }
02833             t1 = thr->threadbuffer;

```

```

02834     }
02835     /*
02836     Check whether we have a collect,function going. If so execute it.
02837     */
02838     if ( AC.CollectFun && *(thr->threadbuffer) < (AM.MaxTer/((LONG)sizeof(WORD))-10) ) {
02839         if ( ( dd = GetMoreTerms(thr->threadbuffer) ) < 0 ) {
02840             LowerSortLevel(); goto ProcErr;
02841         }
02842     }
02843     /*
02844     Check whether we have a priority task:
02845     */
02846     if ( topofavailables > 0 && numberoffullbuckets > 0 ) SendOneBucket(LOWESTLEVELGENERATION);
02847     /*
02848     Now put more terms in the bucket. Position tt after the first term
02849     */
02850     tt = thr->threadbuffer; tt += *tt;
02851     thr->totnum = 1;
02852     thr->usenum = 0;
02853     /*
02854     Next we worry about the 'slow startup' in which we make the initial
02855     buckets smaller, so that we get all threads busy as soon as possible.
02856     */
02857     if ( numpasses > 0 ) {
02858         numbucket++;
02859         if ( numbucket >= numberofworkers ) {
02860             numbucket = 0;
02861             numpasses--;
02862             if ( numpasses == 0 ) thrbufsiz = thrbufsiz0;
02863             else thrbufsiz = thrbufsiz0 / (2 « numpasses);
02864         }
02865         thrbufsiz2 = thrbufsiz + thrbufsiz/5; /* for completing brackets */
02866     }
02867     /*
02868     we have already 1+dd terms
02869     */
02870     while ( ( dd < thrbufsiz ) &&
02871         ( tt - thr->threadbuffer ) < ( thr->threadbuffersize - AM.MaxTer/((LONG)sizeof(WORD)) - 2
02872     ) ) {
02873         /*
02874         First check:
02875         */
02876         if ( topofavailables > 0 && numberoffullbuckets > 0 )
02877             SendOneBucket(LOWESTLEVELGENERATION);
02878         /*
02879         There is room in the bucket. Fill yet another term.
02880         */
02881         if ( GetTermP(B0,tt) == 0 ) { endofinput = 1; break; }
02882         dd++;
02883         thr->totnum++;
02884         dd += AN0.deferskipped;
02885         if ( AR0.DeferFlag ) {
02886             thr->deferbuffer[defcount++] = AR0.DefPosition;
02887             t1 = AR0.CompressBuffer; j = *t1;
02888             NCOPY(ttco,t1,j);
02889         }
02890         if ( AC.CollectFun && *tt < (AM.MaxTer/((LONG)sizeof(WORD))-10) ) {
02891             if ( ( ddd = GetMoreTerms(tt) ) < 0 ) {
02892                 LowerSortLevel(); goto ProcErr;
02893             }
02894             dd += ddd;
02895         }
02896         t1 = tt;
02897         tt += *tt;
02898     }
02899     /*
02900     Check whether there are regular brackets and if we have no DeferFlag
02901     and no collect, we try to add more terms till we finish the current
02902     bracket. We should however not overdo it. Let us say: up to 20%
02903     more terms are allowed.
02904     */
02905     if ( bra ) {
02906         tstop = t1 + *t1; tstop -= ABS(tstop[-1]);
02907         t2 = t1+1;
02908         while ( t2 < tstop ) {
02909             if ( t2[0] == HAAKJE ) { break; }
02910             t2 += t2[1];
02911         }
02912         if ( t2[0] == HAAKJE ) {
02913             t2 += t2[1]; num = t2 - t1;
02914             while ( ( dd < thrbufsiz2 ) &&
02915                 ( tt - thr->threadbuffer ) < ( thr->threadbuffersize - AM.MaxTer - 2 ) ) {
02916                 /*
02917                 First check:
02918                 */
02919                 if ( topofavailables > 0 && numberoffullbuckets > 0 )
02920                     SendOneBucket(LOWESTLEVELGENERATION);

```

```

02918 /*
02919         There is room in the bucket. Fill yet another term.
02920 */
02921     if ( GetTermP(B0,tt) == 0 ) { endofinput = 1; break; }
02922 /*
02923     Same bracket?
02924 */
02925     tstop = tt + *tt; tstop -= ABS(tstop[-1]);
02926     if ( tstop-tt < num ) { /* Different: abort */
02927         AR0.KeptInHold = 1;
02928         break;
02929     }
02930     for ( i = 1; i < num; i++ ) {
02931         if ( t1[i] != tt[i] ) break;
02932     }
02933     if ( i < num ) { /* Different: abort */
02934         AR0.KeptInHold = 1;
02935         break;
02936     }
02937 /*
02938     Same bracket. We need this term.
02939 */
02940     dd++;
02941     thr->totnum++;
02942     tt += *tt;
02943 }
02944 }
02945 }
02946 thr->ddterms = dd; /* total number of terms including keep brackets */
02947 thr->firstterm = AN0.ninterms;
02948 AN0.ninterms += dd;
02949 *tt = 0; /* mark end of bucket */
02950 thr->free = BUCKETFILLED;
02951 thr->type = BUCKETDOINGTERMS;
02952 numberoffullbuckets++;
02953 if ( topofavailables <= 0 && endofinput == 0 ) {
02954 /*
02955     Problem: topofavailables may already be > 0, but the
02956     thread has not yet gone into waiting. Can the signal get lost?
02957     How can we tell that a thread is waiting for a signal?
02958
02959     All threads are busy. Try to load up another bucket.
02960     In the future we could be more sophisticated.
02961     At the moment we load a complete bucket which could be
02962     1000 terms or even more.
02963     In principle it is better to keep a full bucket ready
02964     and check after each term we put in the next bucket. That
02965     way we don't waste time of the workers.
02966 */
02967     for ( j = 0; j < numthreadbuckets; j++ ) {
02968         switch ( threadbuckets[j]->free ) {
02969             case BUCKETFREE:
02970                 thr = threadbuckets[j];
02971                 if ( !endofinput ) goto NextBucket;
02972 /*
02973                 If we are at the end of the input we mark
02974                 the free buckets in a special way. That way
02975                 we don't keep running into them.
02976 */
02977                 thr->free = BUCKETATEND;
02978                 break;
02979             case BUCKETCOMINGFREE:
02980                 thr = threadbuckets[j];
02981                 thr->free = BUCKETFREE;
02982 /*
02983                 Bucket has just been finished.
02984                 Put at the end of the list. We don't want
02985                 an early bucket to wait to be treated last.
02986 */
02987                 for ( k = j+1; k < numthreadbuckets; k++ )
02988                     threadbuckets[k-1] = threadbuckets[k];
02989                 threadbuckets[numthreadbuckets-1] = thr;
02990                 j--; /* we have to redo the same number j. */
02991                 break;
02992             default:
02993                 break;
02994         }
02995     }
02996 /*
02997     We have no free bucket or we are at the end.
02998     The only thing we can do now is wait for a worker to come free,
02999     provided there are still buckets to send.
03000 */
03001 }
03002 /*
03003     Look for the next bucket to send. There is at least one full bucket!
03004 */

```

```

03005         for ( j = 0; j < numthreadbuckets; j++ ) {
03006             if ( threadbuckets[j]->free == BUCKETFILLED ) {
03007                 thr = threadbuckets[j];
03008                 for ( k = j+1; k < numthreadbuckets; k++ )
03009                     threadbuckets[k-1] = threadbuckets[k];
03010                 threadbuckets[numthreadbuckets-1] = thr;
03011                 break;
03012             }
03013         }
03014     /*
03015         Wait for a thread to become available
03016         The bucket we are going to use is in thr.
03017     */
03018 DoBucket:;
03019     AN0.ninterms++;
03020     while ( ( id = GetAvailableThread() ) < 0 ) { MasterWait(); }
03021     /*
03022         Prepare the thread. Give it the term and variables.
03023     */
03024     LoadOneThread(0,id,thr,0);
03025     LOCK(thr->lock);
03026     thr->busy = BUCKETASSIGNED;
03027     UNLOCK(thr->lock);
03028     thr->free = BUCKETINUSE;
03029     numberoffullbuckets--;
03030     /*
03031         And signal the thread to run.
03032         Form now on we may only interfere with this bucket
03033         1: after it has been marked BUCKETCOMINGFREE
03034         2: when thr->busy == BUCKETDOINGTERM and then only when protected by
03035            thr->lock. This would be for load balancing.
03036     */
03037     WakeupThread(id,LOWESTLEVELGENERATION);
03038     /* AN0.ninterms += thr->ddterms; */
03039     /*
03040         Now look whether there is another bucket filled and a worker available
03041     */
03042     if ( topofavailables > 0 ) { /* there is a worker */
03043         for ( j = 0; j < numthreadbuckets; j++ ) {
03044             if ( threadbuckets[j]->free == BUCKETFILLED ) {
03045                 thr = threadbuckets[j];
03046                 for ( k = j+1; k < numthreadbuckets; k++ )
03047                     threadbuckets[k-1] = threadbuckets[k];
03048                 threadbuckets[numthreadbuckets-1] = thr;
03049                 goto DoBucket; /* and we found a bucket */
03050             }
03051         }
03052     /*
03053         no bucket is loaded but there is a thread available
03054         find a bucket to load. If there is none (all are USED or ATEND)
03055         we jump out of the loop.
03056     */
03057         for ( j = 0; j < numthreadbuckets; j++ ) {
03058             switch ( threadbuckets[j]->free ) {
03059                 case BUCKETFREE:
03060                     thr = threadbuckets[j];
03061                     if ( !endofinput ) goto NextBucket;
03062                     thr->free = BUCKETATEND;
03063                     break;
03064                 case BUCKETCOMINGFREE:
03065                     thr = threadbuckets[j];
03066                     if ( endofinput ) {
03067                         thr->free = BUCKETATEND;
03068                     }
03069                     else {
03070                         thr->free = BUCKETFREE;
03071                         for ( k = j+1; k < numthreadbuckets; k++ )
03072                             threadbuckets[k-1] = threadbuckets[k];
03073                         threadbuckets[numthreadbuckets-1] = thr;
03074                         j--;
03075                     }
03076                     break;
03077                 default:
03078                     break;
03079             }
03080         }
03081         if ( j >= numthreadbuckets ) break;
03082     }
03083     else {
03084     /*
03085         No worker available.
03086         Look for a bucket to load.
03087         Its number will be in "still"
03088     */
03089 Finalize:;
03090         still = -1;
03091         for ( j = 0; j < numthreadbuckets; j++ ) {

```

```

03092         switch ( threadbuckets[j]->free ) {
03093             case BUCKETFREE:
03094                 thr = threadbuckets[j];
03095                 if ( !endofinput ) goto NextBucket;
03096                 thr->free = BUCKETATEND;
03097                 break;
03098             case BUCKETCOMINGFREE:
03099                 thr = threadbuckets[j];
03100                 if ( endofinput ) thr->free = BUCKETATEND;
03101                 else {
03102                     thr->free = BUCKETFREE;
03103                     for ( k = j+1; k < numthreadbuckets; k++ )
03104                         threadbuckets[k-1] = threadbuckets[k];
03105                     threadbuckets[numthreadbuckets-1] = thr;
03106                     j--;
03107                 }
03108                 break;
03109             case BUCKETFILLED:
03110                 if ( still < 0 ) still = j;
03111                 break;
03112             default:
03113                 break;
03114         }
03115     }
03116     if ( still < 0 ) {
03117         /*
03118             No buckets to be executed and no buckets FREE.
03119             We must be at the end. Break out of the loop.
03120         */
03121         break;
03122     }
03123     thr = threadbuckets[still];
03124     for ( k = still+1; k < numthreadbuckets; k++ )
03125         threadbuckets[k-1] = threadbuckets[k];
03126     threadbuckets[numthreadbuckets-1] = thr;
03127     goto DoBucket;
03128 }
03129 NextBucket:;
03130 }
03131 /*
03132     Now the stage one load balancing.
03133     If the load has been readjusted we have again filled buckets.
03134     In that case we jump back in the loop.
03135
03136     Tricky point: when do the workers see the new value of AT.LoadBalancing?
03137     It should activate the locks on thr->busy
03138 */
03139 if ( AC.ThreadBalancing ) {
03140     for ( id = 1; id <= numberofworkers; id++ ) {
03141         AB[id]->T.LoadBalancing = 1;
03142     }
03143     if ( LoadReadjusted() ) goto Finalize;
03144     for ( id = 1; id <= numberofworkers; id++ ) {
03145         AB[id]->T.LoadBalancing = 0;
03146     }
03147 }
03148 if ( AC.ThreadBalancing ) {
03149     /*
03150         The AS.Balancing flag should have Generator look for
03151         free workers and apply the "buro" method.
03152
03153         There is still a serious problem.
03154         When for instance a sum_, there may be space created in a local
03155         compiler buffer for a wildcard substitution or whatever.
03156         Compiler buffer execution scribble space.....
03157         This isn't copied along?
03158         Look up ebufnum. There are 12 places with AddRHS!
03159         Problem: one process allocates in ebuf. Then term is given to
03160         other process. It would like to use from this ebuf, but the sender
03161         finishes first and removes the ebuf (and/or overwrites it).
03162
03163         Other problem: local $ variables aren't copied along.
03164     */
03165     AS.Balancing = 0;
03166 }
03167 MasterWaitAll();
03168 AS.Balancing = 0;
03169 /*
03170     When we deal with the last expression we can now remove the input
03171     scratch file. This saves potentially much disk space (up to 1/3)
03172 */
03173 if ( LastExpression ) {
03174     UpdateMaxSize();
03175     if ( AR0.infile->handle >= 0 ) {
03176         CloseFile(AR0.infile->handle);
03177         AR0.infile->handle = -1;
03178         remove(AR0.infile->name);

```

```

03179         PUTZERO(AR0.infile->PPosition);
03180         AR0.infile->POfill = AR0.infile->POfull = AR0.infile->PObuffer;
03181     }
03182 }
03183 /*
03184 We order the threads to finish in the MasterMerge routine
03185 It will start with waiting for all threads to finish.
03186 One could make an administration in which threads that have
03187 finished can start already with the final sort but
03188 1: The load balancing should not make this super urgent
03189 2: It would definitely not be very compatible with the second
03190 stage load balancing.
03191 */
03192 oldgzipCompress = AR0.gzipCompress;
03193 AR0.gzipCompress = 0;
03194 if ( AR0.outtohide ) AR0.outfile = AR0.hidefile;
03195 if ( MasterMerge() < 0 ) {
03196     if ( AR0.outtohide ) AR0.outfile = oldoutfile;
03197     AR0.gzipCompress = oldgzipCompress;
03198     goto ProcErr;
03199 }
03200 if ( AR0.outtohide ) AR0.outfile = oldoutfile;
03201 AR0.gzipCompress = oldgzipCompress;
03202 /*
03203 Now wait for all threads to be ready to give them the cleaning up signal.
03204 With the new MasterMerge routine we can do the cleanup already automatically
03205 avoiding having to send these signals.
03206 */
03207 MasterWaitAll();
03208 AR0.sLevel--;
03209 for ( id = 1; id < AM.totalnumberofthreads; id++ ) {
03210     if ( GetThread(id) > 0 ) WakeupThread(id,CLEANUPEXPRESSION);
03211 }
03212 e->numdummies = 0;
03213 for ( id = 1; id < AM.totalnumberofthreads; id++ ) {
03214     if ( AB[id]->R.MaxDum - AM.IndDum > e->numdummies )
03215         e->numdummies = AB[id]->R.MaxDum - AM.IndDum;
03216     AR0.expchanged |= AB[id]->R.expchanged;
03217 }
03218 /*
03219 And wait for all to be clean.
03220 */
03221 MasterWaitAll();
03222 AT0.WorkPointer = oldworkpointer;
03223 return(0);
03224 ProcErr:;
03225 return(-1);
03226 }
03227
03228 /*
03229 #] ThreadsProcessor :
03230 #[ LoadReadjusted :
03231 */
03250 int LoadReadjusted(void)
03251 {
03252     ALLPRIVATES *B0 = AB[0];
03253     THREADBUCKET *thr = 0, *thrtogo = 0;
03254     int numtogo, numfree, numbusy, n, nperbucket, extra, i, j, u, bus;
03255     LONG numinput;
03256     WORD *t1, *c1, *t2, *c2, *t3;
03257 /*
03258 Start with waiting for at least one free processor.
03259 We don't want the master competing for time when all are busy.
03260 */
03261 while ( topofavailables <= 0 ) MasterWait();
03262 /*
03263 Now look for the fullest bucket and make a list of free buckets
03264 The bad part is that most numbers can change at any moment.
03265 */
03266 restart:;
03267 numtogo = 0;
03268 numfree = 0;
03269 numbusy = 0;
03270 for ( j = 0; j < numthreadbuckets; j++ ) {
03271     thr = threadbuckets[j];
03272     if ( thr->free == BUCKETFREE || thr->free == BUCKETATEND
03273         || thr->free == BUCKETCOMINGFREE ) {
03274         freebuckets[numfree++] = thr;
03275     }
03276     else if ( thr->type != BUCKETDOINGTERMS ) {}
03277     else if ( thr->totnum > 1 ) { /* never steal from a bucket with one term */
03278         LOCK(thr->lock);
03279         bus = thr->busy;
03280         UNLOCK(thr->lock);
03281         if ( thr->free == BUCKETINUSE ) {
03282             n = thr->totnum-thr->usenum;
03283             if ( bus == BUCKETASSIGNED ) numbusy++;

```

```

03284         else if ( ( bus != BUCKETASSIGNED )
03285                 && ( n > numtogo ) ) {
03286             numtogo = n;
03287             thrtogo = thr;
03288         }
03289     }
03290     else if ( bus == BUCKETTOBERELEASED
03291             && thr->free == BUCKETRELEASED ) {
03292         freebuckets[numfree++] = thr;
03293         thr->free = BUCKETATEND;
03294         LOCK(thr->lock);
03295         thr->busy = BUCKETPREPARINGTERM;
03296         UNLOCK(thr->lock);
03297     }
03298 }
03299 }
03300 if ( numfree == 0 ) return(0); /* serious problem */
03301 if ( numtogo > 0 ) { /* provisionally there is something to be stolen */
03302     thr = thrtogo;
03303 /*
03304     If the number has changed there is good progress.
03305     Maybe there is another thread that needs assistance.
03306     We start all over.
03307 */
03308     if ( thr->totnum-thr->usenum < numtogo ) goto restart;
03309 /*
03310     If the thread is in the term loading phase
03311     (thr->busy == BUCKETPREPARINGTERM) we better stay away from it.
03312     We wait now for the thread to be busy, and don't allow it
03313     now to drop out of this state till we are done here.
03314     This all depends on whether AT.LoadBalancing == 1 is seen by
03315     the thread.
03316 */
03317     LOCK(thr->lock);
03318     if ( thr->busy != BUCKETDOINGTERM ) {
03319         UNLOCK(thr->lock);
03320         goto restart;
03321     }
03322     if ( thr->totnum-thr->usenum < numtogo ) {
03323         UNLOCK(thr->lock);
03324         goto restart;
03325     }
03326     thr->free = BUCKETTERMINATED;
03327 /*
03328     The above will signal the thread we want to terminate.
03329     Next all effort goes into making sure the landing is soft.
03330     Unfortunately we don't want to wait for a signal, because the thread
03331     may be working for a long time on a single term.
03332 */
03333     if ( thr->usenum == thr->totnum ) {
03334 /*
03335         Terminated in the mean time or by now working on the
03336         last term. Try again.
03337 */
03338         thr->free = BUCKETATEND;
03339         UNLOCK(thr->lock);
03340         goto restart;
03341     }
03342     goto intercepted;
03343 }
03344 /* This has always been commented. Indeed no lock is held here. */
03345 /* UNLOCK(thr->lock); */
03346 if ( numbusy > 0 ) {
03347     /* JD: this avoids large runtimes for tform tests under valgrind.
03348        What seems to happen is we return from here, goto Finalize, and
03349        end up in LoadReadjusted again without the threads having a
03350        chance to update their busy status. Then we end up here again.
03351        Sleep the thread for, say, lus to allow threads to aquire the lock. */
03352     struct timespec sleeptime;
03353     sleeptime.tv_sec = 0;
03354     sleeptime.tv_nsec = 1000L;
03355     nanosleep(&sleeptime, NULL);
03356     return(1); /* Wait a bit.... */
03357 }
03358 return(0);
03359 intercepted;;
03360 /*
03361     We intercepted one successfully. Now it becomes interesting. Action:
03362     1: determine how many terms per free bucket.
03363     2: find the first untreated term.
03364     3: put the terms in the free buckets.
03365
03366     Remember: we still have the lock to avoid interference from the thread
03367     that is being robbed. We were holding it and then jumped here with
03368     goto intercepted.
03369 */
03370     numinput = thr->firstterm + thr->usenum;

```

```

03371     nperbucket = numtogo / numfree;
03372     extra = numtogo - nperbucket*numfree;
03373     if ( AR0.DeferFlag ) {
03374         t1 = thr->threadbuffer; c1 = thr->compressbuffer; u = thr->usenum;
03375         for ( n = 0; n < thr->usenum; n++ ) { t1 += *t1; c1 += *c1; }
03376         t3 = t1;
03377         if ( extra > 0 ) {
03378             for ( i = 0; i < extra; i++ ) {
03379                 thrtogo = freebuckets[i];
03380                 t2 = thrtogo->threadbuffer;
03381                 c2 = thrtogo->compressbuffer;
03382                 thrtogo->free = BUCKETFILLED;
03383                 thrtogo->type = BUCKETDOINGTERMS;
03384                 thrtogo->totnum = nperbucket+1;
03385                 thrtogo->ddterms = 0;
03386                 thrtogo->usenum = 0;
03387                 thrtogo->busy = BUCKETASSIGNED;
03388                 thrtogo->firstterm = numinput;
03389                 numinput += nperbucket+1;
03390                 for ( n = 0; n <= nperbucket; n++ ) {
03391                     j = *t1; NCOPY(t2,t1,j);
03392                     j = *c1; NCOPY(c2,c1,j);
03393                     thrtogo->deferbuffer[n] = thr->deferbuffer[u++];
03394                 }
03395                 *t2 = *c2 = 0;
03396             }
03397         }
03398         if ( nperbucket > 0 ) {
03399             for ( i = extra; i < numfree; i++ ) {
03400                 thrtogo = freebuckets[i];
03401                 t2 = thrtogo->threadbuffer;
03402                 c2 = thrtogo->compressbuffer;
03403                 thrtogo->free = BUCKETFILLED;
03404                 thrtogo->type = BUCKETDOINGTERMS;
03405                 thrtogo->totnum = nperbucket;
03406                 thrtogo->ddterms = 0;
03407                 thrtogo->usenum = 0;
03408                 thrtogo->busy = BUCKETASSIGNED;
03409                 thrtogo->firstterm = numinput;
03410                 numinput += nperbucket;
03411                 for ( n = 0; n < nperbucket; n++ ) {
03412                     j = *t1; NCOPY(t2,t1,j);
03413                     j = *c1; NCOPY(c2,c1,j);
03414                     thrtogo->deferbuffer[n] = thr->deferbuffer[u++];
03415                 }
03416                 *t2 = *c2 = 0;
03417             }
03418         }
03419     }
03420     else {
03421         t1 = thr->threadbuffer;
03422         for ( n = 0; n < thr->usenum; n++ ) { t1 += *t1; }
03423         t3 = t1;
03424         if ( extra > 0 ) {
03425             for ( i = 0; i < extra; i++ ) {
03426                 thrtogo = freebuckets[i];
03427                 t2 = thrtogo->threadbuffer;
03428                 thrtogo->free = BUCKETFILLED;
03429                 thrtogo->type = BUCKETDOINGTERMS;
03430                 thrtogo->totnum = nperbucket+1;
03431                 thrtogo->ddterms = 0;
03432                 thrtogo->usenum = 0;
03433                 thrtogo->busy = BUCKETASSIGNED;
03434                 thrtogo->firstterm = numinput;
03435                 numinput += nperbucket+1;
03436                 for ( n = 0; n <= nperbucket; n++ ) {
03437                     j = *t1; NCOPY(t2,t1,j);
03438                 }
03439                 *t2 = 0;
03440             }
03441         }
03442         if ( nperbucket > 0 ) {
03443             for ( i = extra; i < numfree; i++ ) {
03444                 thrtogo = freebuckets[i];
03445                 t2 = thrtogo->threadbuffer;
03446                 thrtogo->free = BUCKETFILLED;
03447                 thrtogo->type = BUCKETDOINGTERMS;
03448                 thrtogo->totnum = nperbucket;
03449                 thrtogo->ddterms = 0;
03450                 thrtogo->usenum = 0;
03451                 thrtogo->busy = BUCKETASSIGNED;
03452                 thrtogo->firstterm = numinput;
03453                 numinput += nperbucket;
03454                 for ( n = 0; n < nperbucket; n++ ) {
03455                     j = *t1; NCOPY(t2,t1,j);
03456                 }
03457                 *t2 = 0;

```



```

03458     }
03459 }
03460 }
03461 *t3 = 0; /* This is some form of extra insurance */
03462 if ( thr->free == BUCKETRELEASED && thr->busy == BUCKETTOBERELEASED ) {
03463     thr->free = BUCKETATEND; thr->busy = BUCKETPREPARINGTERM;
03464 }
03465 UNLOCK(thr->lock);
03466 return(1);
03467 }
03468
03469 /*
03470 #] LoadReadjusted :
03471 #[ SortStrategy :
03472 */
03505 /*
03506 #] SortStrategy :
03507 #[ PutToMaster :
03508 */
03531 int PutToMaster(PHEAD WORD *term)
03532 {
03533     int i,j,nexti,ret = 0;
03534     WORD *t, *fill, *top, zero = 0;
03535     if ( term == 0 ) { /* Mark the end of the expression */
03536         t = &zero; j = 1;
03537     }
03538     else {
03539         t = term; ret = j = *term;
03540         if ( j == 0 ) { j = 1; } /* Just in case there is a spurious end */
03541     }
03542     i = AT.SB.FillBlock; /* The block we are working at */
03543     fill = AT.SB.MasterFill[i]; /* Where we are filling */
03544     top = AT.SB.MasterStop[i]; /* End of the block */
03545     while ( j > 0 ) {
03546         while ( j > 0 && fill < top ) {
03547             *fill++ = *t++; j--;
03548         }
03549         if ( j > 0 ) {
03550             /*
03551              We reached the end of the block.
03552              Get the next block and release this block.
03553              The order is important. This is why there should be at least
03554              4 blocks or deadlocks can occur.
03555              */
03556             nexti = i+1;
03557             if ( nexti > AT.SB.MasterNumBlocks ) {
03558                 nexti = 1;
03559             }
03560             LOCK(AT.SB.MasterBlockLock[nexti]);
03561             UNLOCK(AT.SB.MasterBlockLock[i]);
03562             AT.SB.MasterFill[i] = AT.SB.MasterStart[i];
03563             AT.SB.FillBlock = i = nexti;
03564             fill = AT.SB.MasterStart[i];
03565             top = AT.SB.MasterStop[i];
03566         }
03567     }
03568     AT.SB.MasterFill[i] = fill;
03569     return(ret);
03570 }
03571
03572 /*
03573 #] PutToMaster :
03574 #[ SortBotOut :
03575 */
03576
03577 #ifdef WITHSORTBOTS
03578
03587 int
03588 SortBotOut(PHEAD WORD *term)
03589 {
03590     WORD im;
03591
03592     if ( AT.identity != 0 ) return(PutToMaster(BHEAD term));
03593
03594     if ( term == 0 ) {
03595         if ( FlushOut(&SortBotPosition,AR.outfile,1) ) return(-1);
03596         ADDPOS(AT.SS->SizeInFile[0],1);
03597         return(0);
03598     }
03599     else {
03600         numerofterms++;
03601         if ( ( im = PutOut(BHEAD term,&SortBotPosition,AR.outfile,1) ) < 0 ) {
03602             MLOCK(ErrorMessageLock);
03603             MesPrint("Called from MasterMerge/SortBotOut");
03604             MUNLOCK(ErrorMessageLock);
03605             return(-1);
03606         }
03607     }

```

```

03607         ADDPOS(AT.SS->SizeInFile[0],im);
03608         return(im);
03609     }
03610 }
03611
03612 #endif
03613
03614 /*
03615 #] SortBotOut :
03616 #[ MasterMerge :
03617 */
03635 int MasterMerge(void)
03636 {
03637     ALLPRIVATES *B0 = AB[0], *B = 0;
03638     SORTING *S = AT0.SS;
03639     WORD **poin, **poin2, ul, k, i, im, *m1, j;
03640     WORD lpat, mpat, level, l1, l2, r1, r2, r3, c;
03641     WORD *m2, *m3, r31, r33, ki, *rr;
03642     UWORD *coef;
03643     POSITION position;
03644     FILEHANDLE *fin, *fout;
03645 #ifdef WITHSORTBOTS
03646     if ( numberofworkers > 2 ) return(SortBotMasterMerge());
03647 #endif
03648     fin = &S->file;
03649     if ( AR0.PolyFun == 0 ) { S->PolyFlag = 0; }
03650     else if ( AR0.PolyFunType == 1 ) { S->PolyFlag = 1; }
03651     else if ( AR0.PolyFunType == 2 ) {
03652         if ( AR0.PolyFunExp == 2
03653             || AR0.PolyFunExp == 3 ) S->PolyFlag = 1;
03654         else S->PolyFlag = 2;
03655     }
03656     S->TermsLeft = 0;
03657     coef = AN0.SoScratC;
03658     poin = S->poina; poin2 = S->poin2a;
03659     rr = AR0.CompressPointer;
03660     *rr = 0;
03661 /*
03662     #[ Setup :
03663 */
03664     S->inNum = numberofthreads;
03665     fout = AR0.outfile;
03666 /*
03667     Load the patches. The threads have to finish their sort first.
03668 */
03669     S->lPatch = S->inNum - 1;
03670 /*
03671     Claim all zero blocks. We need them anyway.
03672     In principle the workers should never get into these.
03673     We also claim all last blocks. This is a safety procedure that
03674     should prevent the workers from working their way around the clock
03675     before the master gets started again.
03676 */
03677     AS.MasterSort = 1;
03678     numberclaimed = 0;
03679     for ( i = 1; i <= S->lPatch; i++ ) {
03680         B = AB[i];
03681         LOCK(AT.SB.MasterBlockLock[0]);
03682         LOCK(AT.SB.MasterBlockLock[AT.SB.MasterNumBlocks]);
03683     }
03684 /*
03685     Now wake up the threads and have them start their final sorting.
03686     They should start with claiming their block and the master is
03687     not allowed to continue until that has been done.
03688     This waiting of the master will be done below in MasterWaitAllBlocks
03689 */
03690     for ( i = 0; i < S->lPatch; i++ ) {
03691         GetThread(i+1);
03692         WakeupThread(i+1,FINISHEXPRESSION);
03693     }
03694 /*
03695     Prepare the output file.
03696 */
03697     if ( fout->handle >= 0 ) {
03698         PUTZERO(position);
03699         SeekFile(fout->handle,&position,SEEK_END);
03700         ADDPOS(position,((fout->Pofill-fout->PObuffer)*sizeof(WORD)));
03701     }
03702     else {
03703         SETBASEPOSITION(position,(fout->Pofill-fout->PObuffer)*sizeof(WORD));
03704     }
03705 /*
03706     Wait for all threads to finish loading their first block.
03707 */
03708     MasterWaitAllBlocks();
03709 /*
03710     Claim all first blocks.

```

```

03711     We don't release the last blocks.
03712     The strategy is that we always keep the previous block.
03713     In principle it looks like it isn't needed for the last block but
03714     actually it is to keep the front from overrunning the tail when writing.
03715  */
03716     for ( i = 1; i <= S->lPatch; i++ ) {
03717         B = AB[i];
03718         LOCK(AT.SB.MasterBlockLock[1]);
03719         AT.SB.MasterBlock = 1;
03720     }
03721  /*
03722     #] Setup :
03723
03724     Now construct the tree:
03725  */
03726     lpat = 1;
03727     do { lpat <= 1; } while ( lpat < S->lPatch );
03728     mpat = ( lpat » 1 ) - 1;
03729     k = lpat - S->lPatch;
03730  /*
03731     k is the number of empty places in the tree. they will
03732     be at the even positions from 2 to 2*k
03733  */
03734     for ( i = 1; i < lpat; i++ ) { S->tree[i] = -1; }
03735     for ( i = 1; i <= k; i++ ) {
03736         im = ( i * 2 ) - 1;
03737         poin[im] = AB[i]->T.SB.MasterStart[AB[i]->T.SB.MasterBlock];
03738         poin2[im] = poin[im] + *(poin[im]);
03739         S->used[i] = im;
03740         S->ktoi[im] = i-1;
03741         S->tree[mpat+i] = 0;
03742         poin[im-1] = poin2[im-1] = 0;
03743     }
03744     for ( i = (k*2)+1; i <= lpat; i++ ) {
03745         S->used[i-k] = i;
03746         S->ktoi[i] = i-k-1;
03747         poin[i] = AB[i-k]->T.SB.MasterStart[AB[i-k]->T.SB.MasterBlock];
03748         poin2[i] = poin[i] + *(poin[i]);
03749     }
03750  /*
03751     the array poin tells the position of the i-th element of the S->tree
03752     'S->used' is a stack with the S->tree elements that need to be entered
03753     into the S->tree. at the beginning this is S->lPatch. during the
03754     sort there will be only very few elements.
03755     poin2 is the next value of poin. it has to be determined
03756     before the comparisons as the position or the size of the
03757     term indicated by poin may change.
03758     S->ktoi translates a S->tree element back to its stream number.
03759
03760     start the sort
03761  */
03762     level = S->lPatch;
03763  /*
03764     introduce one term
03765  */
03766 OneTerm:
03767     k = S->used[level];
03768     i = k + lpat - 1;
03769     if ( !(poin[k]) ) {
03770         do { if ( !( i »= 1 ) ) goto EndOfMerge; } while ( !S->tree[i] );
03771         if ( S->tree[i] == -1 ) {
03772             S->tree[i] = 0;
03773             level--;
03774             goto OneTerm;
03775         }
03776         k = S->tree[i];
03777         S->used[level] = k;
03778         S->tree[i] = 0;
03779     }
03780  /*
03781     move terms down the tree
03782  */
03783     while ( i »= 1 ) {
03784         if ( S->tree[i] > 0 ) {
03785             if ( ( c = CompareTerms(B0, poin[S->tree[i]],poin[k],(WORD)0) ) > 0 ) {
03786  /*
03787                 S->tree[i] is the smaller. Exchange and go on.
03788  */
03789                 S->used[level] = S->tree[i];
03790                 S->tree[i] = k;
03791                 k = S->used[level];
03792             }
03793             else if ( !c ) { /* Terms are equal */
03794  /*
03795                 S->TermsLeft--;
03796                 Here the terms are equal and their coefficients
03797                 have to be added.

```

```

03798 */
03799     l1 = *( m1 = poin[S->tree[i]] );
03800     l2 = *( m2 = poin[k] );
03801     if ( S->PolyWise ) { /* Here we work with PolyFun */
03802         WORD *ttl, *w;
03803         ttl = m1;
03804         m1 += S->PolyWise;
03805         m2 += S->PolyWise;
03806         if ( S->PolyFlag == 2 ) {
03807             w = poly_ratfun_add(B0,m1,m2);
03808             if ( *ttl + w[1] - m1[1] > AM.MaxTer/((LONG)sizeof(WORD)) ) {
03809                 MLOCK(ErrorMessageLock);
03810                 MesPrint("Term too complex in PolyRatFun addition. MaxTermSize of %10l is
too small",AM.MaxTer);
03811                 MUNLOCK(ErrorMessageLock);
03812                 Terminate(-1);
03813             }
03814             AT0.WorkPointer = w;
03815             if ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 && w[1] > FUNHEAD ) {
03816                 goto cancelled;
03817             }
03818         }
03819         else {
03820             w = AT0.WorkPointer;
03821             if ( w + m1[1] + m2[1] > AT0.WorkTop ) {
03822                 MLOCK(ErrorMessageLock);
03823                 MesPrint("MasterMerge: A Workspace of %10l is too small",AM.WorkSize);
03824                 MUNLOCK(ErrorMessageLock);
03825                 Terminate(-1);
03826             }
03827             AddArgs(B0,m1,m2,w);
03828         }
03829         r1 = w[1];
03830         if ( r1 <= FUNHEAD
03831             || ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 ) )
03832             { goto cancelled; }
03833         if ( r1 == m1[1] ) {
03834             NCOPY(m1,w,r1);
03835         }
03836         else if ( r1 < m1[1] ) {
03837             r2 = m1[1] - r1;
03838             m2 = w + r1;
03839             m1 += m1[1];
03840             while ( --r1 >= 0 ) *--m1 = *--m2;
03841             m2 = m1 - r2;
03842             r1 = S->PolyWise;
03843             while ( --r1 >= 0 ) *--m1 = *--m2;
03844             *m1 -= r2;
03845             poin[S->tree[i]] = m1;
03846         }
03847         else {
03848             r2 = r1 - m1[1];
03849             m2 = ttl - r2;
03850             r1 = S->PolyWise;
03851             m1 = ttl;
03852             *m1 += r2;
03853             poin[S->tree[i]] = m2;
03854             NCOPY(m2,m1,r1);
03855             r1 = w[1];
03856             NCOPY(m2,w,r1);
03857         }
03858     }
03859     #ifdef WITHFLOAT
03860     else if ( AT.SortFloatMode ) {
03861         WORD *term1, *term2;
03862         term1 = poin[S->tree[i]];
03863         term2 = poin[k];
03864         if ( MergeWithFloat(B0, &term1,&term2) == 0 )
03865             goto cancelled;
03866         poin[S->tree[i]] = term1;
03867     }
03868     #endif
03869     else {
03870         r1 = *( m1 += l1 - 1 );
03871         m1 -= ABS(r1) - 1;
03872         r1 = ( ( r1 > 0 ) ? (r1-1) : (r1+1) ) >> 1;
03873         r2 = *( m2 += l2 - 1 );
03874         m2 -= ABS(r2) - 1;
03875         r2 = ( ( r2 > 0 ) ? (r2-1) : (r2+1) ) >> 1;
03876
03877         if ( AddRat(B0,(UWORD *)m1,r1,(UWORD *)m2,r2,coef,&r3) ) {
03878             MLOCK(ErrorMessageLock);
03879             MesCall("MasterMerge");
03880             MUNLOCK(ErrorMessageLock);
03881             SETERROR(-1)
03882         }
03883     }

```

```

03884         if ( AN.ncmod != 0 ) {
03885             if ( ( AC.modmode & POSNEG ) != 0 ) {
03886                 NormalModulus(coef,&r3);
03887             }
03888             else if ( BigLong(coef,r3,(UWORD *)AC.cmod,ABS(AN.ncmod)) >= 0 ) {
03889                 WORD ii;
03890                 SubPLon(coef,r3,(UWORD *)AC.cmod,ABS(AN.ncmod),coef,&r3);
03891                 coef[r3] = 1;
03892                 for ( ii = 1; ii < r3; ii++ ) coef[r3+ii] = 0;
03893             }
03894         }
03895         r3 *= 2;
03896         r33 = ( r3 > 0 ) ? ( r3 + 1 ) : ( r3 - 1 );
03897         if ( r3 < 0 ) r3 = -r3;
03898         if ( r1 < 0 ) r1 = -r1;
03899         r1 *= 2;
03900         r31 = r3 - r1;
03901         if ( !r3 ) { /* Terms cancel */
03902             cancelled:
03903             ul = S->used[level] = S->tree[i];
03904             S->tree[i] = -1;
03905             /*
03906              *
03907              * We skip to the next term in stream ul
03908              *
03909             im = *poin2[ul];
03910             poin[ul] = poin2[ul];
03911             ki = S->ktoi[ul];
03912             if ( (poin[ul] + im + COMPINC) >=
03913             AB[ki+1]->T.SB.MasterStop[AB[ki+1]->T.SB.MasterBlock]
03914             && im > 0 ) {
03915
03916                 We made it to the end of the block. We have to
03917                 release the previous block and claim the next.
03918                 /*
03919                 B = AB[ki+1];
03920                 i = AT.SB.MasterBlock;
03921                 if ( i == 1 ) {
03922                     UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterNumBlocks]);
03923                 }
03924                 else {
03925                     UNLOCK(AT.SB.MasterBlockLock[i-1]);
03926                 }
03927                 if ( i == AT.SB.MasterNumBlocks ) {
03928                     Move the remainder down into block 0
03929                     /*
03930                     WORD *from, *to;
03931                     to = AT.SB.MasterStart[1];
03932                     from = AT.SB.MasterStop[i];
03933                     while ( from > poin[ul] ) *--to = *--from;
03934                     poin[ul] = to;
03935                     i = 1;
03936                 }
03937                 else { i++; }
03938                 LOCK(AT.SB.MasterBlockLock[i]);
03939                 AT.SB.MasterBlock = i;
03940                 poin2[ul] = poin[ul] + im;
03941             }
03942             else {
03943                 poin2[ul] += im;
03944             }
03945             S->used[++level] = k;
03946         }
03947         else if ( !r31 ) { /* copy coef into term1 */
03948             goto CopCof2;
03949         }
03950         else if ( r31 < 0 ) { /* copy coef into term1
03951                                and adjust the length of term1 */
03952             goto CopCoef;
03953         }
03954         else {
03955             /*
03956             this is the dreaded calamity.
03957             is there enough space?
03958             */
03959             if( (poin[S->tree[i]]+11+r31) >= poin2[S->tree[i]] ) {
03960                 /*
03961                 no space! now the special trick for which
03962                 we left 2*maxlng spaces open at the beginning
03963                 of each patch.
03964                 */
03965                 if ( (11 + r31)*((LONG)sizeof(WORD)) >= AM.MaxTer ) {
03966                     MLOCK(ErrorMessageLock);
03967                     MesPrint("MasterMerge: Coefficient overflow during sort");
03968                     MUNLOCK(ErrorMessageLock);
03969                     goto ReturnError;
03970                 }

```

```

03971             m2 = poin[S->tree[i]];
03972             m3 = ( poin[S->tree[i]] - r31 );
03973             do { *m3++ = *m2++; } while ( m2 < m1 );
03974             m1 = m3;
03975         }
03976 CopCoef:
03977             *(poin[S->tree[i]]) += r31;
03978 CopCof2:
03979             m2 = (WORD *)coef; im = r3;
03980             NCOPY(m1,m2,im);
03981             *m1 = r33;
03982         }
03983     }
03984 /*
03985     Now skip to the next term in stream k.
03986 */
03987 NextTerm:
03988     im = poin2[k][0];
03989     poin[k] = poin2[k];
03990     ki = S->ktoi[k];
03991     if ( (poin[k] + im + COMPINC) >=
03992     AB[ki+1]->T.SB.MasterStop[AB[ki+1]->T.SB.MasterBlock]
03993     && im > 0 ) {
03994 /*
03995     We made it to the end of the block. We have to
03996     release the previous block and claim the next.
03997 */
03998         B = AB[ki+1];
03999         i = AT.SB.MasterBlock;
04000         if ( i == 1 ) {
04001             UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterNumBlocks]);
04002         }
04003         else {
04004             UNLOCK(AT.SB.MasterBlockLock[i-1]);
04005         }
04006         if ( i == AT.SB.MasterNumBlocks ) {
04007 /*
04008             Move the remainder down into block 0
04009 */
04010             WORD *from, *to;
04011             to = AT.SB.MasterStart[1];
04012             from = AT.SB.MasterStop[i];
04013             while ( from > poin[k] ) *--to = *--from;
04014             poin[k] = to;
04015             i = 1;
04016         }
04017         else { i++; }
04018         LOCK(AT.SB.MasterBlockLock[i]);
04019         AT.SB.MasterBlock = i;
04020         poin2[k] = poin[k] + im;
04021     }
04022     else {
04023         poin2[k] += im;
04024     }
04025     goto OneTerm;
04026 }
04027 }
04028 else if ( S->tree[i] < 0 ) {
04029     S->tree[i] = k;
04030     level--;
04031     goto OneTerm;
04032 }
04033 }
04034 /*
04035 found the smallest in the set. indicated by k.
04036 write to its destination.
04037 */
04038 S->TermsLeft++;
04039 if ( ( im = PutOut(B0,poin[k],&position,fout,1) ) < 0 ) {
04040     MLOCK(ErrorMessageLock);
04041     MesPrint("Called from MasterMerge with k = %d (stream %d)",k,S->ktoi[k]);
04042     MUNLOCK(ErrorMessageLock);
04043     goto ReturnError;
04044 }
04045 ADDPOS(S->SizeInFile[0],im);
04046 goto NextTerm;
04047 EndOfMerge:
04048 if ( FlushOut(&position,fout,1) ) goto ReturnError;
04049 ADDPOS(S->SizeInFile[0],1);
04050 CloseFile(fin->handle);
04051 remove(fin->name);
04052 fin->handle = -1;
04053 position = S->SizeInFile[0];
04054 MULPOS(position,sizeof(WORD));
04055 S->GenTerms = 0;
04056 for ( j = 1; j <= numberofworkers; j++ ) {
04057     S->GenTerms += AB[j]->T.SS->GenTerms;

```

```

04058     }
04059     WriteStats(&position,STATSPOSTSORT,NOCHECKLOGTYPE);
04060     Expressions[ARO.CurExpr].counter = S->TermsLeft;
04061     Expressions[ARO.CurExpr].size = position;
04062 /*
04063     Release all locks
04064 */
04065     for ( i = 1; i <= S->lPatch; i++ ) {
04066         B = AB[i];
04067         UNLOCK(AT.SB.MasterBlockLock[0]);
04068         if ( AT.SB.MasterBlock == 1 ) {
04069             UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterNumBlocks]);
04070         }
04071         else {
04072             UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterBlock-1]);
04073         }
04074         UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterBlock]);
04075     }
04076     AS.MasterSort = 0;
04077     return(0);
04078 ReturnError:
04079     for ( i = 1; i <= S->lPatch; i++ ) {
04080         B = AB[i];
04081         UNLOCK(AT.SB.MasterBlockLock[0]);
04082         if ( AT.SB.MasterBlock == 1 ) {
04083             UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterNumBlocks]);
04084         }
04085         else {
04086             UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterBlock-1]);
04087         }
04088         UNLOCK(AT.SB.MasterBlockLock[AT.SB.MasterBlock]);
04089     }
04090     AS.MasterSort = 0;
04091     return(-1);
04092 }
04093
04094 /*
04095     #] MasterMerge :
04096     #[ SortBotMasterMerge :
04097 */
04098
04099 #ifdef WITHSORTBOTS
04100
04116 int SortBotMasterMerge(void)
04117 {
04118     FILEHANDLE *fin, *fout;
04119     ALLPRIVATES *B = AB[0], *BB;
04120     POSITION position;
04121     SORTING *S = AT.SS;
04122     int i, j;
04123 /*
04124     Get the sortbots get to claim their writing blocks.
04125     We have to wait till all have been claimed because they also have to
04126     claim the last writing blocks of the workers to prevent the head of
04127     the circular buffer to overrun the tail.
04128
04129     Before waiting we can do some needed initializations.
04130     Also the master has to claim the last writing blocks of its input.
04131 */
04132     topsortbotavailables = 0;
04133     for ( i = numberofworkers+1; i <= numberofworkers+numberofsortbots; i++ ) {
04134         WakeupThread(i,INISORTBOT);
04135     }
04136
04137     AS.MasterSort = 1;
04138     fout = AR.outfile;
04139     numberofterms = 0;
04140     AR.CompressPointer[0] = 0;
04141     numberclaimed = 0;
04142     BB = AB[AT.SortBotIn1];
04143     LOCK(BB->T.SB.MasterBlockLock[BB->T.SB.MasterNumBlocks]);
04144     BB = AB[AT.SortBotIn2];
04145     LOCK(BB->T.SB.MasterBlockLock[BB->T.SB.MasterNumBlocks]);
04146
04147     MasterWaitAllSortBots();
04148 /*
04149     Now we can start up the workers. They will claim their writing blocks.
04150     Here the master will wait till all writing blocks have been claimed.
04151 */
04152     for ( i = 1; i <= numberofworkers; i++ ) {
04153         j = GetThread(i);
04154         WakeupThread(i,FINISHEXPRESSION);
04155     }
04156 /*
04157     Prepare the output file in the mean time.
04158 */
04159     if ( fout->handle >= 0 ) {

```

```

04160         PUTZERO(SortBotPosition);
04161         SeekFile(fout->handle,&SortBotPosition,SEEK_END);
04162         ADDPOS(SortBotPosition,((fout->Pofill-fout->PObuffer)*sizeof(WORD)));
04163     }
04164     else {
04165         SETBASEPOSITION(SortBotPosition,(fout->Pofill-fout->PObuffer)*sizeof(WORD));
04166     }
04167     MasterWaitAllBlocks();
04168 /*
04169     Now we can start the sortbots after which the master goes in
04170     sortbot mode to do its part of the job (the very final merge and
04171     the writing to output file).
04172 */
04173     topsortbotavailables = 0;
04174     for ( i = numberofworkers+1; i <= numberofworkers+numberofsortbots; i++ ) {
04175         WakeupThread(i,RUNSORTBOT);
04176     }
04177     if ( SortBotMerge(BHEAD0) ) {
04178         MLOCK(ErrorMessageLock);
04179         MesPrint("Called from SortBotMasterMerge");
04180         MUNLOCK(ErrorMessageLock);
04181         AS.MasterSort = 0;
04182         return(-1);
04183     }
04184 /*
04185     And next the cleanup
04186 */
04187     if ( S->file.handle >= 0 )
04188     {
04189         fin = &S->file;
04190         CloseFile(fin->handle);
04191         remove(fin->name);
04192         fin->handle = -1;
04193     }
04194     position = S->SizeInFile[0];
04195     MULPOS(position,sizeof(WORD));
04196     S->GenTerms = 0;
04197     for ( j = 1; j <= numberofworkers; j++ ) {
04198         S->GenTerms += AB[j]->T.SS->GenTerms;
04199     }
04200     S->TermsLeft = numberofterms;
04201     WriteStats(&position,STATSPOSTSORT,NOCHECKLOGTYPE);
04202     Expressions[AR.CurExpr].counter = S->TermsLeft;
04203     Expressions[AR.CurExpr].size = position;
04204     AS.MasterSort = 0;
04205 /*
04206     The next statement is to prevent one of the sortbots not having
04207     completely cleaned up before the next module starts.
04208     If this statement is omitted every once in a while one of the sortbots
04209     is still running when the next expression starts and misses its
04210     initialization. The result is usually disastrous.
04211 */
04212     MasterWaitAllSortBots();
04213
04214     return(0);
04215 }
04216
04217 #endif
04218
04219 /*
04220     #] SortBotMasterMerge :
04221     #[ SortBotMerge :
04222 */
04223
04224 #ifdef WITHSORTBOTS
04225
04231 int SortBotMerge(PHEAD0)
04232 {
04233     GETBIDENTITY
04234     ALLPRIVATES *Bin1 = AB[AT.SortBotIn1],*Bin2 = AB[AT.SortBotIn2];
04235     WORD *term1, *term2, *next, *wp;
04236     int blin1, blin2; /* Current block numbers */
04237     int error = 0;
04238     WORD l1, l2, *m1, *m2, *w, r1, r2, r3, r33, r31, *ttl1, ii;
04239     WORD *to, *from, im, c;
04240     UWORD *coef;
04241     SORTING *S = AT.SS;
04242 #ifdef WITHFLOAT
04243     WORD *fun1, *fun2, *fun3, *tstop1, *tstop2, size1, size2, size3, l3, jj, *m3;
04244 #endif
04245 /*
04246     Set the pointers to the input terms and the output space
04247 */
04248     coef = AN.SoScratC;
04249     blin1 = 1;
04250     blin2 = 1;
04251     if ( AT.identity == 0 ) {

```



```

04252     wp = AT.WorkPointer;
04253 }
04254 else {
04255     wp = AT.WorkPointer = AT.WorkSpace;
04256 }
04257 /*
04258  Get the locks for reading the input
04259  This means that we can start once these locks have been cleared
04260  which means that there will be input.
04261 */
04262 LOCK(Bin1->T.SB.MasterBlockLock[blin1]);
04263 LOCK(Bin2->T.SB.MasterBlockLock[blin2]);
04264
04265 term1 = Bin1->T.SB.MasterStart[blin1];
04266 term2 = Bin2->T.SB.MasterStart[blin2];
04267 AT.SB.FillBlock = 1;
04268 /*
04269  Now the main loop. Keep going until one of the two hits the end.
04270 */
04271 while ( *term1 && *term2 ) {
04272     if ( ( c = CompareTerms(BHEAD term1,term2,(WORD)0) ) > 0 ) {
04273 /*
04274     #[ One is smallest :
04275 */
04276         if ( SortBotOut(BHEAD term1) < 0 ) {
04277             MLOCK(ErrorMessageLock);
04278             MesPrint("Called from SortBotMerge with thread = %d",AT.identity);
04279             MUNLOCK(ErrorMessageLock);
04280             error = -1;
04281             goto ReturnError;
04282         }
04283         im = *term1;
04284         next = term1 + im;
04285         if ( next >= Bin1->T.SB.MasterStop[blin1] || ( *next &&
04286             next+*next+COMPINC > Bin1->T.SB.MasterStop[blin1] ) ) {
04287             if ( blin1 == 1 ) {
04288                 UNLOCK(Bin1->T.SB.MasterBlockLock[Bin1->T.SB.MasterNumBlocks]);
04289             }
04290             else {
04291                 UNLOCK(Bin1->T.SB.MasterBlockLock[blin1-1]);
04292             }
04293             if ( blin1 == Bin1->T.SB.MasterNumBlocks ) {
04294 /*
04295                 Move the remainder down into block 0
04296 */
04297                 to = Bin1->T.SB.MasterStart[1];
04298                 from = Bin1->T.SB.MasterStop[Bin1->T.SB.MasterNumBlocks];
04299                 while ( from > next ) *--to = *--from;
04300                 next = to;
04301                 blin1 = 1;
04302             }
04303             else {
04304                 blin1++;
04305             }
04306             LOCK(Bin1->T.SB.MasterBlockLock[blin1]);
04307             Bin1->T.SB.MasterBlock = blin1;
04308         }
04309         term1 = next;
04310 /*
04311         #[ One is smallest :
04312 */
04313     }
04314     else if ( c < 0 ) {
04315 /*
04316         #[ Two is smallest :
04317 */
04318         if ( SortBotOut(BHEAD term2) < 0 ) {
04319             MLOCK(ErrorMessageLock);
04320             MesPrint("Called from SortBotMerge with thread = %d",AT.identity);
04321             MUNLOCK(ErrorMessageLock);
04322             error = -1;
04323             goto ReturnError;
04324         }
04325         next2:
04326         im = *term2;
04327         next = term2 + im;
04328         if ( next >= Bin2->T.SB.MasterStop[blin2] || ( *next
04329             && next+*next+COMPINC > Bin2->T.SB.MasterStop[blin2] ) ) {
04330             if ( blin2 == 1 ) {
04331                 UNLOCK(Bin2->T.SB.MasterBlockLock[Bin2->T.SB.MasterNumBlocks]);
04332             }
04333             else {
04334                 UNLOCK(Bin2->T.SB.MasterBlockLock[blin2-1]);
04335             }
04336             if ( blin2 == Bin2->T.SB.MasterNumBlocks ) {
04337 /*
04338                 Move the remainder down into block 0

```

```

04339         to = Bin2->T.SB.MasterStart[1];
04340         from = Bin2->T.SB.MasterStop[Bin2->T.SB.MasterNumBlocks];
04341         while ( from > next ) *--to = *--from;
04342         next = to;
04343         blin2 = 1;
04344     }
04345     else {
04346         blin2++;
04347     }
04348     LOCK(Bin2->T.SB.MasterBlockLock[blin2]);
04349     Bin2->T.SB.MasterBlock = blin2;
04350 }
04351 term2 = next;
04352 /*
04353     #] Two is smallest :
04354 */
04355 }
04356 else {
04357 /*
04358     #[ Equal :
04359 */
04360     l1 = *( m1 = term1 );
04361     l2 = *( m2 = term2 );
04362     if ( S->PolyWise ) { /* Here we work with PolyFun */
04363         ttl = m1;
04364         m1 += S->PolyWise;
04365         m2 += S->PolyWise;
04366         if ( S->PolyFlag == 2 ) {
04367             AT.WorkPointer = wp;
04368             w = poly_ratfun_add(BHEAD m1,m2);
04369             if ( *ttl + w[1] - m1[1] > AM.MaxTer/((LONG)sizeof(WORD)) ) {
04370                 MLOCK(ErrorMessageLock);
04371                 MesPrint("Term too complex in PolyRatFun addition. MaxTermSize of %10l is too
small",AM.MaxTer);
04372                 MUNLOCK(ErrorMessageLock);
04373                 Terminate(-1);
04374             }
04375             AT.WorkPointer = wp;
04376             if ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 && w[1] > FUNHEAD ) {
04377                 goto cancelled;
04378             }
04379         }
04380         else {
04381             w = wp;
04382             if ( w + m1[1] + m2[1] > AT.WorkTop ) {
04383                 MLOCK(ErrorMessageLock);
04384                 MesPrint("SortBotMerge(%d): A MaxtermSize of %10l is too small",
AT.identity,AM.MaxTer/sizeof(WORD));
04385                 MesPrint("m1[1] = %d, m2[1] = %d, Space =
%1",m1[1],m2[1],(LONG)(AT.WorkTop-wp));
04387                 PrintTerm(term1,"term1");
04388                 PrintTerm(term2,"term2");
04389                 MesPrint("PolyWise = %d",S->PolyWise);
04390                 MUNLOCK(ErrorMessageLock);
04391                 Terminate(-1);
04392             }
04393             AddArgs(BHEAD m1,m2,w);
04394         }
04395         r1 = w[1];
04396         if ( r1 <= FUNHEAD
|| ( w[FUNHEAD] == -SNUMBER && w[FUNHEAD+1] == 0 ) )
04397             { goto cancelled; }
04398         if ( r1 == m1[1] ) {
04399             NCOPY(m1,w,r1);
04400         }
04401         else if ( r1 < m1[1] ) {
04402             r2 = m1[1] - r1;
04403             m2 = w + r1;
04404             m1 += m1[1];
04405             while ( --r1 >= 0 ) *--m1 = *--m2;
04406             m2 = m1 - r2;
04407             r1 = S->PolyWise;
04408             while ( --r1 >= 0 ) *--m1 = *--m2;
04409             *m1 -= r2;
04410             term1 = m1;
04411         }
04412         else {
04413             r2 = r1 - m1[1];
04414             m2 = ttl - r2;
04415             r1 = S->PolyWise;
04416             m1 = ttl;
04417             *m1 += r2;
04418             term1 = m2;
04419             NCOPY(m2,m1,r1);
04420             r1 = w[1];
04421             NCOPY(m2,w,r1);
04422         }
04423     }

```

```

04424     }
04425 #ifdef WITHFLOAT
04426     else if ( AT.SortFloatMode ) {
04427 /*
04428     The terms are in m1/term1 and m2/term2 and their length in l1 and l2.
04429     We have to locate the floats which have already been
04430     verified in the compare routine. Once we have the new
04431     term we can jump to the code that writes away the
04432     result after adding the rationals.
04433 */
04434     tstop1 = m1+1; size1 = tstop1[-1]; tstop1 -= ABS(size1);
04435     tstop2 = m2+1; size2 = tstop2[-1]; tstop2 -= ABS(size2);
04436     if ( AT.SortFloatMode == 3 ) {
04437         fun1 = m1+1;
04438         while ( fun1[0] != FLOATFUN && fun1+fun1[1] < tstop1 ) {
04439             fun1 += fun1[1];
04440         }
04441         if ( size1 < 0 ) fun1[FUNHEAD+3] = -fun1[FUNHEAD+3];
04442         UnpackFloat(aux1,fun1);
04443         fun2 = m2+1;
04444         while ( fun2[0] != FLOATFUN && fun2+fun2[1] < tstop2 ) {
04445             fun2 += fun2[1];
04446         }
04447         if ( size2 < 0 ) fun2[FUNHEAD+3] = -fun2[FUNHEAD+3];
04448         UnpackFloat(aux2,fun2);
04449     }
04450     else if ( AT.SortFloatMode == 1 ) {
04451         fun1 = m1+1;
04452         while ( fun1[0] != FLOATFUN && fun1+fun1[1] < tstop1 ) {
04453             fun1 += fun1[1];
04454         }
04455         if ( size1 < 0 ) fun1[FUNHEAD+3] = -fun1[FUNHEAD+3];
04456         UnpackFloat(aux1,fun1);
04457         fun2 = tstop2;
04458         RatToFloat(aux2,(UWORD *)fun2,size2);
04459     }
04460     else if ( AT.SortFloatMode == 2 ) {
04461         fun1 = tstop1;
04462         RatToFloat(aux1,(UWORD *)fun1,size1);
04463         fun2 = m2+1;
04464         while ( fun2[0] != FLOATFUN && fun2+fun2[1] < tstop2 ) {
04465             fun2 += fun2[1];
04466         }
04467         if ( size2 < 0 ) fun2[FUNHEAD+3] = -fun2[FUNHEAD+3];
04468         UnpackFloat(aux2,fun2);
04469     }
04470     else {
04471         MLOCK(ErrorMessageLock);
04472         MesPrint("Illegal value %d for AT.SortFloatMode in
SortBotMerge.",AT.SortFloatMode);
04473         MUNLOCK(ErrorMessageLock);
04474         Terminate(-1);
04475         return(0);
04476     }
04477     mpf_add(aux3,aux1,aux2);
04478     size3 = mpf_sgn(aux3);
04479     if ( size3 == 0 ) { /* Cancelling! Rare! */
04480         goto cancelled;
04481     }
04482     else if ( size3 < 0 ) mpf_neg(aux3,aux3);
04483     fun3 = TermMalloc("MasterMerge");
04484     PackFloat(fun3,aux3);
04485     l3 = fun3[1]+(fun1-m1)+3; /* new size */
04486
04487     if ( l3 != l1 ) {
04488 /*
04489         Copy it all to wp
04490 */
04491         if ( (l3)*((LONG)sizeof(WORD)) >= AM.MaxTer ) {
04492             MLOCK(ErrorMessageLock);
04493             MesPrint("MasterMerge: Coefficient overflow during sort");
04494             MUNLOCK(ErrorMessageLock);
04495             goto ReturnError;
04496         }
04497         m3 = wp; m2 = term1;
04498         while ( m2 < fun1 ) *m3++ = *m2++;
04499         for ( jj = 0; jj < fun3[1]; jj++ ) *m3++ = fun3[jj];
04500         *m3++ = 1; *m3++ = 1;
04501         *m3++ = size3 < 0 ? -3: 3;
04502         *wp = m3-wp;
04503         TermFree(fun3,"MasterMerge");
04504         goto PutOutwp;
04505     }
04506     for ( jj = 0; jj < fun3[1]; jj++ ) fun1[jj] = fun3[jj];
04507     fun1 += fun3[1];
04508     *fun1++ = 1; *fun1++ = 1;
04509     *fun1++ = size3 < 0 ? -3: 3;

```

```

04510         *term1 = fun1-term1;
04511         TermFree(fun3,"MasterMerge");
04512     }
04513 #endif
04514     else {
04515         r1 = *( m1 += 11 - 1 );
04516         m1 -= ABS(r1) - 1;
04517         r1 = ( ( r1 > 0 ) ? (r1-1) : (r1+1) ) » 1;
04518         r2 = *( m2 += 12 - 1 );
04519         m2 -= ABS(r2) - 1;
04520         r2 = ( ( r2 > 0 ) ? (r2-1) : (r2+1) ) » 1;
04521
04522         if ( AddRat(BHEAD (UWORD *)m1,r1,(UWORD *)m2,r2,coef,&r3) ) {
04523             MLOCK(ErrorMessageLock);
04524             MesCall("SortBotMerge");
04525             MUNLOCK(ErrorMessageLock);
04526             SETERROR(-1)
04527         }
04528
04529         if ( AN.ncmod != 0 ) {
04530             if ( ( AC.modmode & POSNEG ) != 0 ) {
04531                 NormalModulus(coef,&r3);
04532             }
04533             else if ( BigLong(coef,r3,(UWORD *)AC.cmod,ABS(AN.ncmod)) >= 0 ) {
04534                 SubPLon(coef,r3,(UWORD *)AC.cmod,ABS(AN.ncmod),coef,&r3);
04535                 coef[r3] = 1;
04536                 for ( ii = 1; ii < r3; ii++ ) coef[r3+ii] = 0;
04537             }
04538         }
04539         if ( !r3 ) { goto cancelled; }
04540         r3 *= 2;
04541         r33 = ( r3 > 0 ) ? ( r3 + 1 ) : ( r3 - 1 );
04542         if ( r3 < 0 ) r3 = -r3;
04543         if ( r1 < 0 ) r1 = -r1;
04544         r1 *= 2;
04545         r31 = r3 - r1;
04546         if ( !r31 ) { /* copy coef into term1 */
04547             m2 = (WORD *)coef; im = r3;
04548             NCOPY(m1,m2,im);
04549             *m1 = r33;
04550         }
04551         else {
04552             to = wp; from = term1;
04553             while ( from < m1 ) *to++ = *from++;
04554             from = (WORD *)coef; im = r3;
04555             NCOPY(to,from,im);
04556             *to++ = r33;
04557             wp[0] = to - wp;
04558 PutOutwp:
04559             if ( SortBotOut(BHEAD wp) < 0 ) {
04560                 MLOCK(ErrorMessageLock);
04561                 MesPrint("Called from SortBotMerge with thread = %d",AT.identity);
04562                 MUNLOCK(ErrorMessageLock);
04563                 error = -1;
04564                 goto ReturnError;
04565             }
04566             goto cancelled;
04567         }
04568     }
04569     if ( SortBotOut(BHEAD term1) < 0 ) {
04570         MLOCK(ErrorMessageLock);
04571         MesPrint("Called from SortBotMerge with thread = %d",AT.identity);
04572         MUNLOCK(ErrorMessageLock);
04573         error = -1;
04574         goto ReturnError;
04575     }
04576 cancelled;; /* Now we need two new terms */
04577     im = *term1;
04578     next = term1 + im;
04579     if ( next >= Bin1->T.SB.MasterStop[blin1] || ( *next &&
04580 next+*next+COMPINC > Bin1->T.SB.MasterStop[blin1] ) ) {
04581         if ( blin1 == 1 ) {
04582             UNLOCK(Bin1->T.SB.MasterBlockLock[Bin1->T.SB.MasterNumBlocks]);
04583         }
04584         else {
04585             UNLOCK(Bin1->T.SB.MasterBlockLock[blin1-1]);
04586         }
04587         if ( blin1 == Bin1->T.SB.MasterNumBlocks ) {
04588             /*
04589             Move the remainder down into block 0
04590             */
04591             to = Bin1->T.SB.MasterStart[1];
04592             from = Bin1->T.SB.MasterStop[Bin1->T.SB.MasterNumBlocks];
04593             while ( from > next ) *--to = *--from;
04594             next = to;
04595             blin1 = 1;
04596         }

```

```

04597         else {
04598             blin1++;
04599         }
04600         LOCK(Bin1->T.SB.MasterBlockLock[blin1]);
04601         Bin1->T.SB.MasterBlock = blin1;
04602     }
04603     term1 = next;
04604     goto next2;
04605 /*
04606     #] Equal :
04607 */
04608 }
04609 }
04610 /*
04611     Copy the tail
04612 */
04613     if ( *term1 ) {
04614 /*
04615         #] Tail in one :
04616 */
04617         while ( *term1 ) {
04618             if ( SortBotOut(BHEAD term1) < 0 ) {
04619                 MLOCK(ErrorMessageLock);
04620                 MesPrint("Called from SortBotMerge with thread = %d",AT.identity);
04621                 MUNLOCK(ErrorMessageLock);
04622                 error = -1;
04623                 goto ReturnError;
04624             }
04625             im = *term1;
04626             next = term1 + im;
04627             if ( next >= Bin1->T.SB.MasterStop[blin1] || ( *next &&
04628                 next+*next+COMPINC > Bin1->T.SB.MasterStop[blin1] ) ) {
04629                 if ( blin1 == 1 ) {
04630                     UNLOCK(Bin1->T.SB.MasterBlockLock[Bin1->T.SB.MasterNumBlocks]);
04631                 }
04632                 else {
04633                     UNLOCK(Bin1->T.SB.MasterBlockLock[blin1-1]);
04634                 }
04635                 if ( blin1 == Bin1->T.SB.MasterNumBlocks ) {
04636 /*
04637                     Move the remainder down into block 0
04638 */
04639                     to = Bin1->T.SB.MasterStart[1];
04640                     from = Bin1->T.SB.MasterStop[Bin1->T.SB.MasterNumBlocks];
04641                     while ( from > next ) *--to = *--from;
04642                     next = to;
04643                     blin1 = 1;
04644                 }
04645                 else {
04646                     blin1++;
04647                 }
04648                 LOCK(Bin1->T.SB.MasterBlockLock[blin1]);
04649                 Bin1->T.SB.MasterBlock = blin1;
04650             }
04651             term1 = next;
04652         }
04653 /*
04654         #] Tail in one :
04655 */
04656     }
04657     else if ( *term2 ) {
04658 /*
04659         #] Tail in two :
04660 */
04661         while ( *term2 ) {
04662             if ( SortBotOut(BHEAD term2) < 0 ) {
04663                 MLOCK(ErrorMessageLock);
04664                 MesPrint("Called from SortBotMerge with thread = %d",AT.identity);
04665                 MUNLOCK(ErrorMessageLock);
04666                 error = -1;
04667                 goto ReturnError;
04668             }
04669             im = *term2;
04670             next = term2 + im;
04671             if ( next >= Bin2->T.SB.MasterStop[blin2] || ( *next
04672                 && next+*next+COMPINC > Bin2->T.SB.MasterStop[blin2] ) ) {
04673                 if ( blin2 == 1 ) {
04674                     UNLOCK(Bin2->T.SB.MasterBlockLock[Bin2->T.SB.MasterNumBlocks]);
04675                 }
04676                 else {
04677                     UNLOCK(Bin2->T.SB.MasterBlockLock[blin2-1]);
04678                 }
04679                 if ( blin2 == Bin2->T.SB.MasterNumBlocks ) {
04680 /*
04681                     Move the remainder down into block 0
04682 */
04683                     to = Bin2->T.SB.MasterStart[1];

```

```

04684         from = Bin2->T.SB.MasterStop[Bin2->T.SB.MasterNumBlocks];
04685         while ( from > next ) --to = ---from;
04686         next = to;
04687         blin2 = 1;
04688     }
04689     else {
04690         blin2++;
04691     }
04692     LOCK(Bin2->T.SB.MasterBlockLock[blin2]);
04693     Bin2->T.SB.MasterBlock = blin2;
04694 }
04695     term2 = next;
04696 }
04697 /*
04698     #] Tail in two :
04699 */
04700 }
04701     SortBotOut(BHEAD 0);
04702 ReturnError;;
04703 /*
04704     Release all locks
04705 */
04706     UNLOCK(Bin1->T.SB.MasterBlockLock[blin1]);
04707     if ( blin1 > 1 ) {
04708         UNLOCK(Bin1->T.SB.MasterBlockLock[blin1-1]);
04709     }
04710     else {
04711         UNLOCK(Bin1->T.SB.MasterBlockLock[Bin1->T.SB.MasterNumBlocks]);
04712     }
04713     UNLOCK(Bin2->T.SB.MasterBlockLock[blin2]);
04714     if ( blin2 > 1 ) {
04715         UNLOCK(Bin2->T.SB.MasterBlockLock[blin2-1]);
04716     }
04717     else {
04718         UNLOCK(Bin2->T.SB.MasterBlockLock[Bin2->T.SB.MasterNumBlocks]);
04719     }
04720     if ( AT.identity > 0 ) {
04721         UNLOCK(AT.SB.MasterBlockLock[AT.SB.FillBlock]);
04722     }
04723 /*
04724     And that was all folks
04725 */
04726     return(error);
04727 }
04728
04729 #endif
04730
04731 /*
04732     #] SortBotMerge :
04733     #[ IniSortBlocks :
04734 */
04735
04736 static int SortBlocksInitialized = 0;
04737
04738 int IniSortBlocks(int numworkers)
04739 {
04740     ALLPRIVATES *B;
04741     SORTING *S;
04742     LONG totalsize, workersize, blocksize, numberofterms;
04743     int maxter, id, j;
04744     int numberofblocks = NUMBEROFBLOCKSINSERT, numparts;
04745     WORD *w;
04746
04747     if ( SortBlocksInitialized ) return(0);
04748     SortBlocksInitialized = 1;
04749     if ( numworkers == 0 ) return(0);
04750
04751 #ifdef WITHSORTBOTS
04752     if ( numworkers > 2 ) {
04753         numparts = 2*numworkers - 2;
04754         numberofblocks = numberofblocks/2;
04755     }
04756     else {
04757         numparts = numworkers;
04758     }
04759 #else
04760     numparts = numworkers;
04761 #endif
04762     S = AM.S0;
04763     totalsize = S->LargeSize + S->SmallEsize;
04764     workersize = totalsize / numparts;
04765     maxter = AM.MaxTer/sizeof(WORD);
04766     blocksize = ( workersize - maxter )/numberofblocks;
04767     numberofterms = blocksize / maxter;
04768     if ( numberofterms < MINIMUMNUMBEROFTERMS ) {
04769
04770         This should have been taken care of in RecalcSetups.

```

```

04777 /*
04778     MesPrint("We have a problem with the size of the blocks in IniSortBlocks");
04779     Terminate(-1);
04780 }
04781 /*
04782     Layout:  For each worker
04783               block 0: size is maxter WORDS
04784               numberofblocks blocks of size blocksize WORDS
04785 */
04786 w = S->lBuffer;
04787 if ( w == 0 ) w = S->sBuffer;
04788 for ( id = 1; id <= numparts; id++ ) {
04789     B = AB[id];
04790     AT.SB.MasterBlockLock = (pthread_mutex_t *)Mallc1(
04791         sizeof(pthread_mutex_t)*(numberofblocks+1), "MasterBlockLock");
04792     AT.SB.MasterStart = (WORD **)Mallc1(sizeof(WORD *)*(numberofblocks+1)*3, "MasterBlock");
04793     AT.SB.MasterFill = AT.SB.MasterStart + (numberofblocks+1);
04794     AT.SB.MasterStop = AT.SB.MasterFill + (numberofblocks+1);
04795     AT.SB.MasterNumBlocks = numberofblocks;
04796     AT.SB.MasterBlock = 0;
04797     AT.SB.FillBlock = 0;
04798     AT.SB.MasterFill[0] = AT.SB.MasterStart[0] = w;
04799     w += maxter;
04800     AT.SB.MasterStop[0] = w;
04801     AT.SB.MasterBlockLock[0] = dummylock;
04802     for ( j = 1; j <= numberofblocks; j++ ) {
04803         AT.SB.MasterFill[j] = AT.SB.MasterStart[j] = w;
04804         w += blocksize;
04805         AT.SB.MasterStop[j] = w;
04806         AT.SB.MasterBlockLock[j] = dummylock;
04807     }
04808 }
04809 if ( w > S->sTop2 ) {
04810     MesPrint("Counting problem in IniSortBlocks");
04811     Terminate(-1);
04812 }
04813 return(0);
04814 }
04815
04816 /*
04817     #] IniSortBlocks :
04818     #[ UpdateSortBlocks :
04819 */
04820
04825 int UpdateSortBlocks(int numworkers)
04826 {
04827     ALLPRIVATES *B;
04828     SORTING *S;
04829     LONG totalsize, workersize, blocksize, numberofterms;
04830     int maxter, id, j;
04831     int numberofblocks = NUMBEROFBLOCKSINSORT, numparts;
04832     WORD *w;
04833
04834     if ( numworkers == 0 ) return(0);
04835
04836 #ifndef WITHSORTBOTS
04837     if ( numworkers > 2 ) {
04838         numparts = 2*numworkers - 2;
04839         numberofblocks = numberofblocks/2;
04840     }
04841     else {
04842         numparts = numworkers;
04843     }
04844 #else
04845     numparts = numworkers;
04846 #endif
04847     S = AM.S0;
04848     totalsize = S->LargeSize + S->SmallEsize;
04849     workersize = totalsize / numparts;
04850     maxter = AM.MaxTer/sizeof(WORD);
04851     blocksize = ( workersize - maxter )/numberofblocks;
04852     numberofterms = blocksize / maxter;
04853     if ( numberofterms < MINIMUMNUMBEROFTERMS ) {
04854 /*
04855         This should have been taken care of in RecalcSetups.
04856 */
04857         MesPrint("We have a problem with the size of the blocks in UpdateSortBlocks");
04858         Terminate(-1);
04859     }
04860 /*
04861     Layout:  For each worker
04862               block 0: size is maxter WORDS
04863               numberofblocks blocks of size blocksize WORDS
04864 */
04865     w = S->lBuffer;
04866     if ( w == 0 ) w = S->sBuffer;
04867     for ( id = 1; id <= numparts; id++ ) {

```

```

04868     B = AB[id];
04869     AT.SB.MasterFill[0] = AT.SB.MasterStart[0] = w;
04870     w += maxter;
04871     AT.SB.MasterStop[0] = w;
04872     for ( j = 1; j <= numberofblocks; j++ ) {
04873         AT.SB.MasterFill[j] = AT.SB.MasterStart[j] = w;
04874         w += blocksize;
04875         AT.SB.MasterStop[j] = w;
04876     }
04877 }
04878 if ( w > S->sTop2 ) {
04879     MesPrint("Counting problem in UpdateSortBlocks");
04880     Terminate(-1);
04881 }
04882 return(0);
04883 }
04884
04885 /*
04886 #] UpdateSortBlocks :
04887 #[ DefineSortBotTree :
04888 */
04889 #ifdef WITHSORTBOTS
04890 void DefineSortBotTree(void)
04891 {
04892     ALLPRIVATES *B;
04893     int n, i, from;
04894     if ( numberofworkers <= 2 ) return;
04895     n = numberofworkers*2-2;
04896     for ( i = numberofworkers+1, from = 1; i <= n; i++ ) {
04897         B = AB[i];
04898         AT.SortBotIn1 = from++;
04899         AT.SortBotIn2 = from++;
04900     }
04901     B = AB[0];
04902     AT.SortBotIn1 = from++;
04903     AT.SortBotIn2 = from++;
04904 }
04905 #endif
04906
04907 /*
04908 #] DefineSortBotTree :
04909 #[ GetTerm2 :
04910
04911 Routine does a GetTerm but only when a bracket index is involved and
04912 only from brackets that have been judged not suitable for treatment
04913 as complete brackets by a single worker. Whether or not a bracket should
04914 be treated by a single worker is decided by TreatIndexEntry
04915 */
04916 WORD GetTerm2(PHEAD WORD *term)
04917 {
04918     WORD *ttco, *ttt, retval;
04919     LONG n,i;
04920     FILEHANDLE *fi;
04921     EXPRESSIONS e = AN.expr;
04922     BRACKETINFO *b = e->bracketinfo;
04923     BRACKETINDEX *bi = b->indexbuffer;
04924     POSITION where, eonfile = AS.OldOnFile[e-Expressions], bstart, bnext;
04925
04926     /*
04927     1: Get the current position.
04928     */
04929     switch ( e->status ) {
04930         case UNHIDELEXPRESSION:
04931         case UNHIDEGEXPRESSION:
04932         case DROPHLEXPRESSION:
04933         case DROPHGEXPRESSION:
04934         case HIDDENLEXPRESSION:
04935         case HIDDENGEXPRESSION:
04936             fi = AR.hidefile;
04937             break;
04938         default:
04939             fi = AR.infile;
04940             break;
04941     }
04942     if ( AR.KeptInHold ) {
04943         retval = GetTerm(BHEAD term);
04944         return(retval);
04945     }
04946     SeekScratch(fi,&where);
04947     if ( AN.lastinindex < 0 ) {
04948         /*
04949         We have to test whether we have to do the first bracket
04950         */
04951         if ( ( n = TreatIndexEntry(BHEAD 0) ) <= 0 ) {

```



```

04960         AN.lastindex = n;
04961         where = bi[n].start;
04962         ADD2POS(where,eonfile);
04963         SetScratch(fi,&where);
04964     /*
04965         Put the bracket in the Compress buffer.
04966     */
04967         ttco = AR.CompressBuffer;
04968         tt = b->bracketbuffer + bi[0].bracket;
04969         i = *tt;
04970         NCOPY(ttco,tt,i)
04971         AR.CompressPointer = ttco;
04972         retval = GetTerm(BHEAD term);
04973         return(retval);
04974     }
04975     else AN.lastindex = n-1;
04976 }
04977 /*
04978 2: Find the corresponding index number
04979 a: test whether it is in the current bracket
04980 */
04981 n = AN.lastindex;
04982 bstart = bi[n].start;
04983 ADD2POS(bstart,eonfile);
04984 bnext = bi[n].next;
04985 ADD2POS(bnext,eonfile);
04986 if ( ISLESSPOS(bstart,where) && ISLESSPOS(where,bnext) ) {
04987     retval = GetTerm(BHEAD term);
04988     return(retval);
04989 }
04990 for ( n++ ; n < b->indexfill; n++ ) {
04991     i = TreatIndexEntry(BHEAD n);
04992     if ( i <= 0 ) {
04993     /*
04994         Put the bracket in the Compress buffer.
04995     */
04996         ttco = AR.CompressBuffer;
04997         tt = b->bracketbuffer + bi[n].bracket;
04998         i = *tt;
04999         NCOPY(ttco,tt,i)
05000         AR.CompressPointer = ttco;
05001         AN.lastindex = n;
05002         where = bi[n].start;
05003         ADD2POS(where,eonfile);
05004         SetScratch(fi,&(where));
05005         retval = GetTerm(BHEAD term);
05006         return(retval);
05007     }
05008     else n += i - 1;
05009 }
05010 return(0);
05011 }
05012 /*
05013 #] GetTerm2 :
05014 #[ TreatIndexEntry :
05015 */
05016 int TreatIndexEntry(PHEAD LONG n)
05017 {
05018     BRACKETINFO *b = AN.expr->bracketinfo;
05019     LONG numbra = b->indexfill - 1, i;
05020     LONG totterms;
05021     BRACKETINDEX *bi;
05022     POSITION pos1, average;
05023     /*
05024     1: number of the bracket should be such that there is one bucket
05025     for each worker remaining.
05026     */
05027     if ( ( numbra - n ) <= numberofworkers ) return(0);
05028     /*
05029     2: size of the bracket contents should be less than what remains in
05030     the expression divided by the number of workers.
05031     */
05032     bi = b->indexbuffer;
05033     DIFPOS(pos1,bi[numbra].next,bi[n].next); /* Size of what remains */
05034     BASEPOSITION(average) = DIVPOS(pos1,(3*numberofworkers));
05035     DIFPOS(pos1,bi[n].next,bi[n].start); /* Size of the current bracket */
05036     if ( ISLESSPOS(average,pos1) ) return(0);
05037     /*
05038     It passes.
05039     Now check whether we can do more brackets
05040     */
05041     totterms = bi->termsinbracket;
05042     if ( totterms > 2*AC.ThreadBucketSize ) return(1);
05043     for ( i = 1; i < numbra-n; i++ ) {
05044         DIFPOS(pos1,bi[n+i].next,bi[n].start); /* Size of the combined brackets */
05045         if ( ISLESSPOS(average,pos1) ) return(i);
05046     }

```

```

05055         totterms += bi->termsinbracket;
05056         if ( totterms > 2*AC.ThreadBucketSize ) return(i+1);
05057     }
05058     /*
05059     We have a problem at the end of the system. Just do one.
05060     */
05061     return(1);
05062 }
05063
05064 /*
05065 #] TreatIndexEntry :
05066 #[ SetHideFiles :
05067 */
05068
05069 void SetHideFiles(void) {
05070     int i;
05071     ALLPRIVATES *B, *B0 = AB[0];
05072     for ( i = 1; i <= numberofworkers; i++ ) {
05073         B = AB[i];
05074         AR.hidefile->handle = AR0.hidefile->handle;
05075         if ( AR.hidefile->handle < 0 ) {
05076             AR.hidefile->PObuffer = AR0.hidefile->PObuffer;
05077             AR.hidefile->POstop = AR0.hidefile->POstop;
05078             AR.hidefile->POfill = AR0.hidefile->POfill;
05079             AR.hidefile->POfull = AR0.hidefile->POfull;
05080             AR.hidefile->POsize = AR0.hidefile->POsize;
05081             AR.hidefile->POposition = AR0.hidefile->POposition;
05082             AR.hidefile->filesize = AR0.hidefile->filesize;
05083         }
05084         else {
05085             AR.hidefile->PObuffer = AR.hidefile->wPObuffer;
05086             AR.hidefile->POstop = AR.hidefile->wPOstop;
05087             AR.hidefile->POfill = AR.hidefile->wPOfill;
05088             AR.hidefile->POfull = AR.hidefile->wPOfull;
05089             AR.hidefile->POsize = AR.hidefile->wPOsize;
05090             PUTZERO(AR.hidefile->POposition);
05091         }
05092     }
05093 }
05094
05095 /*
05096 #] SetHideFiles :
05097 #[ IniFbufs :
05098 */
05099
05100 void IniFbufs(void)
05101 {
05102     int i;
05103     for ( i = 0; i < AM.totalnumberofthreads; i++ ) {
05104         IniFbuffer(AB[i]->T.fbufnum);
05105     }
05106 }
05107
05108 /*
05109 #] IniFbufs :
05110 #[ SetMods :
05111 */
05112
05113 void SetMods(void)
05114 {
05115     ALLPRIVATES *B;
05116     int i, n, j;
05117     for ( j = 0; j < AM.totalnumberofthreads; j++ ) {
05118         B = AB[j];
05119         AN.ncmod = AC.ncmod;
05120         if ( AN.cmod != 0 ) M_free(AN.cmod, "AN.cmod");
05121         n = ABS(AN.ncmod);
05122         AN.cmod = (UWORD *)Malloc1(sizeof(WORD)*n, "AN.cmod");
05123         for ( i = 0; i < n; i++ ) AN.cmod[i] = AC.cmod[i];
05124     }
05125 }
05126
05127 /*
05128 #] SetMods :
05129 #[ UnSetMods :
05130 */
05131
05132 void UnSetMods(void)
05133 {
05134     ALLPRIVATES *B;
05135     int j;
05136     for ( j = 0; j < AM.totalnumberofthreads; j++ ) {
05137         B = AB[j];
05138         if ( AN.cmod != 0 ) M_free(AN.cmod, "AN.cmod");
05139         AN.cmod = 0;
05140     }
05141 }

```

```


05142
05143 /*
05144  #] UnSetMods :
05145  #[ find_Horner_MCTS_expand_tree_threaded :
05146 */
05147
05148 void find_Horner_MCTS_expand_tree_threaded(void) {
05149     int id;
05150     while (( id = GetAvailableThread() ) < 0)
05151         MasterWait();
05152     WakeupThread(id,MCTSEXPANDTREE);
05153 }
05154
05155 /*
05156  #] find_Horner_MCTS_expand_tree_threaded :
05157  #[ optimize_expression_given_Horner_threaded :
05158 */
05159
05160 extern void optimize_expression_given_Horner_threaded(void) {
05161     int id;
05162     while (( id = GetAvailableThread() ) < 0)
05163         MasterWait();
05164     WakeupThread(id,OPTIMIZEEXPRESSION);
05165 }
05166
05167 /*
05168  #] optimize_expression_given_Horner_threaded :
05169 */
05170
05171 #endif

```

4.147 token.c File Reference

#include "form3.h"

Include dependency graph for token.c:

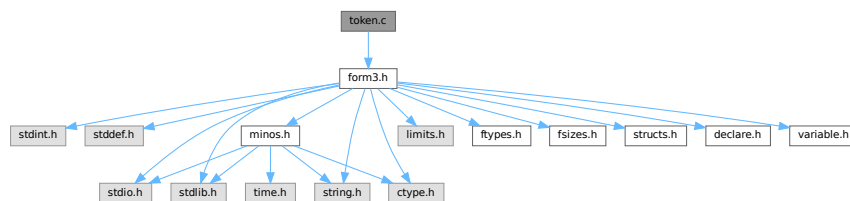

Macros

- #define [CHECKPOLY](#) {if(polyflag)MesPrint("&Illegal use of polynomial function"); polyflag = 0; }

Functions

- int [tokenize](#) (UBYTE *in, WORD leftright)
- void [WriteTokens](#) (SBYTE *in)
- int [simp1token](#) (SBYTE *s)
- int [simpwtoken](#) (SBYTE *s)
- int [simp2token](#) (SBYTE *s)
- int [simp3atoken](#) (SBYTE *s, int mode)
- int [simp3btoken](#) (SBYTE *s, int mode)
- int [simp4token](#) (SBYTE *s)
- int [simp5token](#) (SBYTE *s, int mode)
- int [simp6token](#) (SBYTE *tokens, int mode)

Variables

- `char * ttypes []`

4.147.1 Detailed Description

The tokenizer. This is a part of the compiler that does an intermediate type of translation. It does look up the names etc and can do a number of optimizations. The resulting output is a stream of bytes which can be processed by the code generator (in the file [compiler.c](#))

Definition in file [token.c](#).

4.147.2 Macro Definition Documentation

4.147.2.1 CHECKPOLY

```
#define CHECKPOLY {if(polyflag)MesPrint("&Illegal use of polynomial function"); polyflag = 0;
}
```

Definition at line 56 of file [token.c](#).

4.147.3 Function Documentation

4.147.3.1 tokenize()

```
int tokenize (
    UBYTE * in,
    WORD leftright )
```

Definition at line 58 of file [token.c](#).

4.147.3.2 WriteTokens()

```
void WriteTokens (
    SBYTE * in )
```

Definition at line 652 of file [token.c](#).

4.147.3.3 simp1token()

```
int simp1token (
    SBYTE * s )
```

Definition at line 700 of file [token.c](#).

4.147.3.4 simpwtoken()

```
int simpwtoken (
    SBYTE * s )
```

Definition at line 789 of file [token.c](#).

4.147.3.5 simp2token()

```
int simp2token (
    SBYTE * s )
```

Definition at line 943 of file [token.c](#).

4.147.3.6 simp3atoken()

```
int simp3atoken (
    SBYTE * s,
    int mode )
```

Definition at line 1191 of file [token.c](#).

4.147.3.7 simp3btoken()

```
int simp3btoken (
    SBYTE * s,
    int mode )
```

Definition at line 1432 of file [token.c](#).

4.147.3.8 simp4token()

```
int simp4token (
    SBYTE * s )
```

Definition at line 1843 of file [token.c](#).

4.147.3.9 simp5token()

```
int simp5token (
    SBYTE * s,
    int mode )
```

Definition at line 2003 of file [token.c](#).

4.147.3.10 simp6token()

```
int simp6token (
    SBYTE * tokens,
    int mode )
```

Definition at line 2049 of file [token.c](#).

4.147.4 Variable Documentation

4.147.4.1 ttypes

```
char* ttypes[]
```

Initial value:

```
= { "\n", "S", "I", "V", "F", "set", "E", "dotp", "#",
    "sub", "d_", "S", "dub", "(", ")", "?", "??", ".", "[", "]",
    ",", "(", ")", "*", "/", "^", "+", "-", "!", "end", "{", "}",
    "N_?", "conj", "()", "#d", "^d", "_", "snum" }
```

Definition at line 647 of file [token.c](#).

4.148 token.c

[Go to the documentation of this file.](#)

```
00001
00008 /* #[ License : */
00009 /*
00010 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00011 * When using this file you are requested to refer to the publication
00012 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00013 * This is considered a matter of courtesy as the development was paid
00014 * for by FOM the Dutch physics granting agency and we would like to
00015 * be able to track its scientific use to convince FOM of its value
00016 * for the community.
00017 *
00018 * This file is part of FORM.
00019 *
00020 * FORM is free software: you can redistribute it and/or modify it under the
00021 * terms of the GNU General Public License as published by the Free Software
00022 * Foundation, either version 3 of the License, or (at your option) any later
00023 * version.
00024 *
00025 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00026 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00027 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00028 * details.
00029 *
00030 * You should have received a copy of the GNU General Public License along
00031 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00032 */
00033 /* #[ License : */
00034 /*
00035 * #[ Includes :
00036 */
00037
00038 #include "form3.h"
00039
00040 /*
00041 * #[ Includes :
00042 * #[ Compiler :
00043 * #[ tokenize :
00044
00045 * Takes the input in 'in' and translates it into tokens.
00046 * The tokens are put in the token buffer which starts at 'AC.tokens'
00047 * and runs till 'AC.toptokens'
00048 * We may assume that the various types of brackets match properly.
00049 * object = -1: after , or (
00050 * object = 0: name/variable/number etc is allowed
```

```

00051         object = 1: variable.
00052         object = 2: number
00053         object = 3: ) after subexpression
00054 */
00055
00056 #define CHECKPOLY {if(polyflag)MesPrint("&Illegal use of polynomial function"); polyflag = 0; }
00057
00058 int tokenize(UBYTE *in, WORD leftright)
00059 {
00060     int error = 0, object, funlevel = 0, bracelevel = 0, explevel = 0, numexp;
00061     int polyflag = 0;
00062     WORD number, type;
00063     UBYTE *s = in, c;
00064     SBYTE *out, *outtop, num[MAXNUMSIZE], *t;
00065     LONG i;
00066     if ( AC.tokens == 0 ) {
00067         SBYTE **ppp = &(AC.tokens); /* to avoid a compiler warning */
00068         SBYTE **pppp = &(AC.toptokens);
00069         DoubleBuffer((void **)ppp, (void **)pppp, sizeof(SBYTE), "start tokens");
00070     }
00071     out = AC.tokens;
00072     outtop = AC.toptokens - MAXNUMSIZE;
00073     AC.dumnumflag = 0;
00074     object = 0;
00075     while ( *in ) {
00076         if ( out > outtop ) {
00077             LONG oldsize = (LONG)(out - AC.tokens);
00078             SBYTE **ppp = &(AC.tokens); /* to avoid a compiler warning */
00079             SBYTE **pppp = &(AC.toptokens);
00080             DoubleBuffer((void **)ppp, (void **)pppp, sizeof(SBYTE), "expand tokens");
00081             out = AC.tokens + oldsize;
00082             outtop = AC.toptokens - MAXNUMSIZE;
00083         }
00084         switch ( FG.cTable[*in] ) {
00085             case 0: /* a-zA-Z */
00086                 CHECKPOLY
00087                 s = in++;
00088                 while ( FG.cTable[*in] == 0 || FG.cTable[*in] == 1
00089                     || *in == '_' ) in++;
00090             dovariable: c = *in; *in = 0;
00091                 if ( object > 0 ) {
00092                     MesPrint("&Illegal position for %s",s);
00093                     if ( !error ) error = 1;
00094                 }
00095                 if ( out > AC.tokens && ( out[-1] == TWILDCARD || out[-1] == TNOT ) ) {
00096                     type = GetName(AC.varnames,s,&number,NOAUTO);
00097                 }
00098                 else {
00099                     type = GetName(AC.varnames,s,&number,WITHAUTO);
00100                 }
00101                 if ( type < 0 )
00102                     type = GetName(AC.exprnames,s,&number,NOAUTO);
00103                 switch ( type ) {
00104                     case CSYMBOL: *out++ = TSYMBOL; break;
00105                     case CINDEX:
00106                         if ( number >= (AM.IndDum-AM.OffsetIndex) ) {
00107                             if ( c != '?' ) {
00108                                 MesPrint("&Generated indices should be of the type Nnumber_?");
00109                                 error = 1;
00110                             }
00111                             else {
00112                                 *in++ = c; c = *in; *in = 0;
00113                                 AC.dumnumflag = 1;
00114                             }
00115                         }
00116                         *out++ = TINDEX;
00117                         break;
00118                     case CVECTOR: *out++ = TVECTOR; break;
00119                     case CFUNCTION:
00120 #ifdef WITHMPI
00121                         /*
00122                          * In the preprocessor, random functions in #$var=... and #inside
00123                          * may cause troubles, because the program flow on a slave may be
00124                          * different from those on others. We set AC.RhsExprInModuleFlag in order
00125                          * to make the change of $-variable be done on the master and thus keep the
00126                          * consistency among the master and all slave processes. The previous value
00127                          * of AC.RhsExprInModuleFlag will be restored after #$var=... and #inside.
00128                          */
00129                         if ( AP.PreAssignFlag || AP.PreInsideLevel ) {
00130                             switch ( number + FUNCTION ) {
00131                                 case RANDOMFUNCTION:
00132                                 case RANPERM:
00133                                     AC.RhsExprInModuleFlag = 1;
00134                             }
00135                         }
00136 #endif
00137                         *out++ = TFUNCTION;

```

```

00138             break;
00139         case CSET: *out++ = TSET; break;
00140         case CEXPRESSION: *out++ = TEXPRESSION;
00141             if ( leftright == LHSIDE ) {
00142                 if ( !error ) error = 1;
00143                 MesPrint("&Expression not allowed in LH-side of
substitution: %s",s);
00144             }
00145         /*[06nov2003 mt]:*/
00146         #ifdef WITHMPI
00147             else { /*RHSide*/
00148                 /* NOTE: We always set AC.RhsExprInModuleFlag regardless
*
* AP.PreAssignFlag or AP.PreInsideLevel because we
*
* RHS expressions even in those cases. */
00149                 AC.RhsExprInModuleFlag = 1;
00150             }
00151             if ( !AP.PreAssignFlag && !AP.PreInsideLevel )
00152                 Expressions[number].vflags |= ISINRHS;
00153         #endif
00154         /*:[06nov2003 mt]*/
00155         if ( AC.exprfillwarning == 0 ) {
00156             AC.exprfillwarning = 1;
00157         }
00158         break;
00159         case CDELTA: *out++ = TDELTA; *in = c;
00160             object = 1; continue;
00161         case CDUBIOUS: *out++ = TDUBIOUS; break;
00162         default: *out++ = TDUBIOUS;
00163             if ( !error ) error = 1;
00164             MesPrint("&Undeclared variable %s",s);
00165             number = AddDubious(s);
00166             break;
00167     }
00168     object = 1;
00169     donumber: i = 0;
00170     do { num[i++] = (SBYTE)(number & 0x7F); number >>= 7; } while ( number );
00171     while ( --i >= 0 ) *out++ = num[i];
00172     *in = c;
00173     break;
00174     case 1: /* 0-9 */
00175     {
00176         #ifdef WITHFLOAT
00177             int spec;
00178             UBYTE *in2;
00179             CHECKPOLY
00180             s = in;
00181             while ( *s == '0' && FG.cTable[s[1]] == 1 ) s++;
00182             in = s+1; i = 1;
00183             while ( FG.cTable[*in] == 1 ) { in++; i++; }
00184             if ( object > 0 ) {
00185                 c = *in; *in = 0;
00186                 MesPrint("&Illegal position for %s",s);
00187                 *in = c;
00188                 if ( !error ) error = 1;
00189             }
00190             if ( i == 1 && *in == '_' && ( *s == '5' || *s == '6'
|| *s == '7' ) ) {
00191                 in++; *out++ = TSGAMMA; *out++ = (SBYTE)(*s - '4');
00192                 object = 1;
00193                 break;
00194             }
00195         #endif
00196         in2 = CheckFloat(in,&spec);
00197         if ( in2 > in ) {
00198             if ( spec == -1 ) {
00199                 MesPrint("&The floating point system has not been started: %s",in);
00200                 if ( !error ) error = 1;
00201             }
00202             else {
00203                 in = in2;
00204             }
00205         }
00206         dofloat:
00207             while ( out + (in-s) >= AC.toptokens ) {
00208                 LONG oldsize = (LONG)(out - AC.tokens);
00209                 SBYTE **ppp = &(AC.tokens); /* to avoid a compiler warning */
00210                 SBYTE **pppp = &(AC.toptokens);
00211                 DoubleBuffer((void **)ppp,(void **)pppp,sizeof(SBYTE),"more tokens");
00212                 out = AC.tokens + oldsize;
00213                 outtop = AC.toptokens - MAXNUMSIZE;
00214             }
00215             *out++ = TFLOAT;
00216             while ( s < in ) *out++ = *s++;
00217         }
00218     }
00219     else

```



```

00222 #endif
00223 {
00224     *out++ = TNUMBER;
00225     if ( ( i & 1 ) != 0 ) *out++ = (SBYTE) (*s++ - '0');
00226     while ( out + (in-s)/2 >= AC.toptokens ) {
00227         LONG oldsize = (LONG) (out - AC.tokens);
00228         SBYTE **ppp = &(AC.tokens); /* to avoid a compiler warning */
00229         SBYTE **pppp = &(AC.toptokens);
00230         DoubleBuffer((void **)ppp, (void **)pppp, sizeof(SBYTE), "more tokens");
00231         out = AC.tokens + oldsize;
00232         outtop = AC.toptokens - MAXNUMSIZE;
00233     }
00234     while ( s < in ) { /* We store in base 100 */
00235         *out++ = (SBYTE) (( *s - '0' ) * 10 + ( s[1] - '0' ));
00236         s += 2;
00237     }
00238 }
00239 object = 2;
00240 }
00241 break;
00242 case 2: /* . $ _ ? # ' */
00243     CHECKPOLY
00244     if ( *in == '?' ) {
00245         if ( leftright == LHSIDE ) {
00246             if ( object == 1 ) { /* follows a name */
00247                 in++; *out++ = TWILDCARD;
00248                 if ( FG.cTable[in[0]] == 0 || in[0] == '[' || in[0] == '{' ) object = 0;
00249             }
00250             else if ( object == -1 ) { /* follows comma or ( */
00251                 in++; s = in;
00252                 while ( FG.cTable[*in] == 0 || FG.cTable[*in] == 1 ) in++;
00253                 c = *in; *in = 0;
00254                 if ( FG.cTable[*s] != 0 ) {
00255                     MesPrint("&Illegal name for argument list variable %s",s);
00256                     error = 1;
00257                 }
00258                 else {
00259                     i = AddWildcardName((UBYTE *)s);
00260                     *in = c;
00261                     *out++ = TWILDARG;
00262                     *out++ = (SBYTE)i;
00263                 }
00264                 object = 1;
00265             }
00266             else {
00267                 MesPrint("&Illegal position for ?");
00268                 error = 1;
00269                 in++;
00270             }
00271         }
00272         else {
00273             if ( object != -1 ) goto IllPos;
00274             in++;
00275             if ( FG.cTable[*in] == 0 || FG.cTable[*in] == 1 ) {
00276                 s = in;
00277                 while ( FG.cTable[*in] == 0 || FG.cTable[*in] == 1 ) in++;
00278                 c = *in; *in = 0;
00279                 i = GetWildcardName((UBYTE *)s);
00280                 if ( i <= 0 ) {
00281                     MesPrint("&Undefined argument list variable %s",s);
00282                     error = 1;
00283                 }
00284                 *in = c;
00285                 *out++ = TWILDARG;
00286                 *out++ = (SBYTE)i;
00287             }
00288             else {
00289                 if ( AC.vectorlikeLHS == 0 ) {
00290                     MesPrint("&Generated index ? only allowed in vector substitution",s);
00291                     error = 1;
00292                 }
00293                 *out++ = TGENINDEX;
00294             }
00295             object = 1;
00296         }
00297     }
00298     else if ( *in == '.' ) {
00299         if ( object == 1 ) { /* follows a name */
00300             *out++ = TDOT;
00301             object = 0;
00302             in++;
00303         }
00304     }
00305     #ifndef WITHFLOAT
00306     else if ( object == 0 || object == -1 ) {
00307         /*
00308         Test for floating point number
00309         */

```

```

00309         int spec;
00310         s = CheckFloat(in,&spec);
00311         if ( s > in ) {
00312             if ( spec == -1 ) {
00313                 MesPrint("&The floating point system has not been started: %s",in);
00314                 if ( !error ) error = 1;
00315                 in++;
00316             }
00317             else {
00318                 UBYTE *a = s; s = in; in = a;
00319                 goto dofloat;
00320             }
00321         }
00322         else goto IllPos;
00323     }
00324 #endif
00325     else goto IllPos;
00326 }
00327 else if ( *in == '$' ) { /* $ variable */
00328     in++;
00329     s = in;
00330     if ( FG.cTable[*in] == 0 ) {
00331         while ( FG.cTable[*in] == 0 || FG.cTable[*in] == 1 ) in++;
00332         if ( *in == '_' && AP.PreAssignFlag == 2 ) in++;
00333         c = *in; *in = 0;
00334         if ( object > 0 ) {
00335             if ( object != 1 || leftright == RHSIDE ) {
00336                 MesPrint("&Illegal position for $%s",s);
00337                 if ( !error ) error = 1;
00338                 /* else can be assignment in wildcard */
00339             }
00340             else {
00341                 if ( ( number = GetDollar(s) ) < 0 ) {
00342                     number = AddDollar(s,0,0,0);
00343                 }
00344             }
00345             else if ( ( number = GetDollar(s) ) < 0 ) {
00346                 MesPrint("&Undefined variable $%s",s);
00347                 if ( !error ) error = 1;
00348                 number = AddDollar(s,0,0,0);
00349             }
00350             *out++ = TDOLLAR;
00351             object = 1;
00352             if ( ( AC.exprfillwarning == 0 ) &&
00353                 ( ( out > AC.tokens+1 ) && ( out[-2] != TWILDCARD ) ) ) {
00354                 AC.exprfillwarning = 1;
00355             }
00356             goto donumber;
00357         }
00358         else {
00359             MesPrint("&Illegal name for $ variable after %s",in);
00360             if ( !error ) error = 1;
00361         }
00362     }
00363     else if ( *in == '#' ) {
00364         in++;
00365         if ( object == 1 ) { /* follows a name */
00366             *out++ = TCONJUGATE;
00367         }
00368         else {
00369             MesPrint("&Illegal position for %#");
00370             error = 1;
00371         }
00372     }
00373     else goto IllPos;
00374     break;
00375 case 3: /* [ ] */
00376     CHECKPOLY
00377     if ( *in == '[' ) {
00378         if ( object == 1 ) { /* after name */
00379             t = out-1;
00380             if ( *t == RPARENTHESIS ) {
00381                 *out++ = LBRACE; *out++ = LPARENTHESIS;
00382                 bracelevel++; explevel = bracelevel;
00383             }
00384             else {
00385                 while ( *t >= 0 && t > AC.tokens ) t--;
00386                 if ( *t == TEXPRESSION ) {
00387                     *out++ = LBRACE; *out++ = LPARENTHESIS;
00388                     bracelevel++; explevel = bracelevel;
00389                 }
00390                 else { *out++ = LBRACE; bracelevel++; }
00391             }
00392             object = 0;
00393         }
00394         else { /* name. find matching ] */
00395             s = in;

```

```

00396             in = SkipAName(in);
00397             goto dovariable;
00398         }
00399     }
00400     else {
00401         if ( explevel > 0 && explevel == bracelevel ) {
00402             *out++ = RPARENTHESIS; explevel = 0;
00403         }
00404         *out++ = RBACE; object = 1; bracelevel--;
00405     }
00406     in++;
00407     break;
00408 case 4: /* ( ) = ; , */
00409     if ( *in == '(' ) {
00410         if ( funlevel >= AM.MaxParLevel ) {
00411             MesPrint("&More than %d levels of parentheses",AM.MaxParLevel);
00412             return(-1);
00413         }
00414         if ( object == 1 ) { /* After name -> function,vector */
00415             AC.tokenarglevel[funlevel++] = TYPEISFUN;
00416             *out++ = TFUNOPEN;
00417             if ( polyflag ) {
00418                 if ( in[1] != ')' && in[1] != ',' ) {
00419                     *out++ = TNUMBER; *out++ = (SBYTE)(polyflag);
00420                     *out++ = TCOMMA;
00421                     *out++ = LPARENTHESIS;
00422                 }
00423                 else {
00424                     *out++ = LPARENTHESIS;
00425                     *out++ = TNUMBER; *out++ = (SBYTE)(polyflag);
00426                 }
00427                 polyflag = 0;
00428             }
00429             else if ( in[1] != ')' && in[1] != ',' ) {
00430                 *out++ = LPARENTHESIS;
00431             }
00432         }
00433         else if ( object <= 0 ) {
00434             CHECKPOLY
00435             AC.tokenarglevel[funlevel++] = TYPEISSUB;
00436             *out++ = LPARENTHESIS;
00437         }
00438         else {
00439             polyflag = 0;
00440             AC.tokenarglevel[funlevel++] = TYPEISMYSTERY;
00441             MesPrint("&Illegal position for (: %s",in);
00442             if ( error >= 0 ) error = -1;
00443         }
00444         object = -1;
00445     }
00446     else if ( *in == ')' ) {
00447         funlevel--;
00448         if ( funlevel < 0 ) {
00449             /* if ( funflag == 0 ) { */
00450                 MesPrint("&There is an unmatched parenthesis");
00451                 if ( error >= 0 ) error = -1;
00452             /* } */
00453         }
00454         else if ( object <= 0
00455             && ( AC.tokenarglevel[funlevel] != TYPEISFUN
00456             || out[-1] != TFUNOPEN ) ) {
00457             MesPrint("&Illegal position for closing parenthesis.");
00458             if ( error >= 0 ) error = -1;
00459             if ( AC.tokenarglevel[funlevel] == TYPEISFUN ) object = 1;
00460             else object = 3;
00461         }
00462         else {
00463             if ( AC.tokenarglevel[funlevel] == TYPEISFUN ) {
00464                 if ( out[-1] == TFUNOPEN ) out--;
00465                 else {
00466                     if ( out[-1] != TCOMMA ) *out++ = RPARENTHESIS;
00467                     *out++ = TFUNCLOSE;
00468                 }
00469                 object = 1;
00470             }
00471             else if ( AC.tokenarglevel[funlevel] == TYPEISSUB ) {
00472                 *out++ = RPARENTHESIS;
00473                 object = 3;
00474             }
00475         }
00476     }
00477     else if ( *in == ',' ) {
00478         if ( /* object > 0 && */ funlevel > 0 &&
00479             AC.tokenarglevel[funlevel-1] == TYPEISFUN ) {
00480             if ( out[-1] != TFUNOPEN && out[-1] != TCOMMA )
00481                 *out++ = RPARENTHESIS;
00482             else { *out++ = TNUMBER; *out++ = 0; }

```

```

00483         *out++ = TCOMMA;
00484         if ( in[1] != ',' && in[1] != ')' )
00485             *out++ = LPARENTHESIS;
00486         else if ( in[1] == ')' ) {
00487             *out++ = TNUMBER; *out++ = 0;
00488         }
00489     }
00490 /*
00491     else if ( object > 0 ) {
00492     }
00493 */
00494     else {
00495         MesPrint("&Illegal position for comma: %s",in);
00496         MesPrint("&Forgotten ; ?");
00497         if ( error >= 0 ) error = -1;
00498     }
00499     object = -1;
00500 }
00501 else goto IllPos;
00502 in++;
00503 break;
00504 case 5: /* + - * % / ^ : */
00505     CHECKPOLY
00506     if ( *in == ':' || *in == '%' ) goto IllPos;
00507     if ( *in == '*' || *in == '/' || *in == '^' ) {
00508         if ( object <= 0 ) {
00509             MesPrint("&Illegal position for operator: %s",in);
00510             if ( error >= 0 ) error = -1;
00511         }
00512         else if ( *in == '*' ) *out++ = TMULTIPLY;
00513         else if ( *in == '/' ) *out++ = TDIVIDE;
00514         else *out++ = TPOWER;
00515         in++;
00516     }
00517     else {
00518         i = 1;
00519         while ( *in == '+' || *in == '-' ) {
00520             if ( *in == '-' ) i = -i;
00521             in++;
00522         }
00523         if ( i == 1 ) {
00524             if ( out > AC.tokens && out[-1] != TFUNOPEN &&
00525                 out[-1] != LPARENTHESIS && out[-1] != TCOMMA
00526                 && out[-1] != LBRACE )
00527                 *out++ = TPLUS;
00528         }
00529         else *out++ = TMINUS;
00530     }
00531     object = 0;
00532     break;
00533 case 6: /* Whitespace */
00534     in++; break;
00535 case 7: /* { | } */
00536     CHECKPOLY
00537     if ( *in == '{' ) {
00538         if ( object > 0 ) {
00539             MesPrint("&Illegal position for %s",in);
00540             if ( !error ) error = 1;
00541         }
00542         s = in+1;
00543         SKIPBRA2(in)
00544         number = DoTempSet(s,in);
00545         in++;
00546         if ( number >= 0 ) {
00547             *out++ = TSET;
00548             i = 0;
00549             do { num[i++] = (SBYTE)(number & 0x7F); number >>= 7; } while ( number );
00550             while ( --i >= 0 ) *out++ = num[i];
00551         }
00552         else if ( error == 0 ) error = 1;
00553         object = 1;
00554     }
00555     else goto IllPos;
00556     break;
00557 case 8: /* ! & < > */
00558     CHECKPOLY
00559     if ( *in != '!' || leftright == RHSIDE
00560         || object != 1 || out[-1] != TWILDCARD ) goto IllPos;
00561     *out++ = TNOT;
00562     if ( FG.cTable[in[1]] == 0 || in[1] == '[' || in[1] == '{' ) object = 0;
00563     in++;
00564     break;
00565 default:
00566 IllPos: MesPrint("&Illegal character at this position: %s",in);
00567         if ( error >= 0 ) error = -1;
00568         in++;
00569         polyflag = 0;

```

```

00570             break;
00571         }
00572     }
00573     *out++ = TENDOFIT;
00574     AC.endoftokens = out;
00575     if ( funlevel > 0 || bracelevel != 0 ) {
00576         if ( funlevel > 0 ) MesPrint("&Unmatched parentheses");
00577         if ( bracelevel != 0 ) MesPrint("&Unmatched braces");
00578         return(-1);
00579     }
00580     if ( AC.TokensWriteFlag ) WriteTokens(AC.tokens);
00581     /*
00582     Simplify fixed set elements
00583     */
00584     if ( error == 0 && simpltoken(AC.tokens) ) error = 1;
00585     /*
00586     Collect wildcards for the prototype. Simplify the leftover wildcards
00587     */
00588     if ( error == 0 && leftright == LHSIDE && simpwtoken(AC.tokens) )
00589         error = 1;
00590     /*
00591     Now prepare the set[n] objects in the RHS.
00592     */
00593     if ( error == 0 && leftright == RHSIDE && simp4token(AC.tokens) )
00594         error = 1;
00595     /*
00596     Simplify simple function arguments (and 1/fac_ and 1/invfac_)
00597     */
00598     if ( error == 0 && simp2token(AC.tokens) ) error = 1;
00599     /*
00600     Next we try to remove composite denominators or exponents and
00601     replace them by their internal functions. This may involve expanding
00602     the buffer. The return code of 3a is negative if there is an error
00603     and positive if indeed we need to do some work.
00604     simp3btoken does the work
00605     */
00606     numexp = 0;
00607     if ( error == 0 && ( numexp = simp3atoken(AC.tokens,leftright) ) < 0 )
00608         error = 1;
00609     if ( numexp > 0 ) {
00610         // Make some space at the beginning of AC.tokens, filled with EMPTY.
00611         SBYTE *tt;
00612         out = AC.tokens;
00613         while ( *out != TENDOFIT ) out++;
00614         while ( out+numexp*9 > outtop ) {
00615             LONG oldsize = (LONG)(out - AC.tokens);
00616             SBYTE **ppp = &(AC.tokens); /* to avoid a compiler warning */
00617             SBYTE **pppp = &(AC.toptokens);
00618             DoubleBuffer((void **)ppp, (void **)pppp, sizeof(SBYTE), "out tokens");
00619             out = AC.tokens + oldsize;
00620             outtop = AC.toptokens - MAXNUMSIZE;
00621         }
00622         tt = out + numexp*9;
00623         while ( out >= AC.tokens ) { *tt-- = *out--; }
00624         while ( tt >= AC.tokens ) { *tt-- = EMPTY; }
00625         if ( error == 0 && simp3btoken(AC.tokens,leftright) ) error = 1;
00626         if ( error == 0 && simp2token(AC.tokens) ) error = 1;
00627     }
00628     /*
00629     In simp5token we test for special cases like sumvariables that are
00630     already wildcards, etc.
00631     */
00632     if ( error == 0 && simp5token(AC.tokens,leftright) ) error = 1;
00633     /*
00634     In simp6token we test for special cases like factorized expressions
00635     that occur in the RHS in an improper way.
00636     */
00637     if ( error == 0 && simp6token(AC.tokens,leftright) ) error = 1;
00638     return(error);
00639 }
00640
00641 /*
00642 #] tokenize :
00643 #[ WriteTokens :
00644 */
00645
00646 char *ttypes[] = { "\n", "S", "I", "V", "F", "set", "E", "dotp", "#",
00647     "sub", "d_", "$", "dub", "(", ")", "?", "??", ".", "[", "]",
00648     ",", "((, " ))", "*", "/", "^", "+", "-", "!", "end", "{", "}",
00649     "N_?", "conj", "()", "#d", "^d", "_", "snum" };
00650
00651 void WriteTokens(SBYTE *in)
00652 {
00653     int numinline = 0, x, n = sizeof(ttypes)/sizeof(char *);
00654     char outbuf[81], *s, *out, c;
00655     out = outbuf;

```

```

00657     while ( *in != TENDOFIT ) {
00658         if ( *in < 0 ) {
00659             if ( *in >= -n ) {
00660                 s = ttypes[-*in];
00661                 while ( *s ) { *out++ = *s++; numinline++; }
00662             }
00663             else {
00664                 *out++ = '-'; x = -*in; numinline++;
00665                 goto writenumber;
00666             }
00667         }
00668         else {
00669             x = *in;
00670 writenumber:
00671             s = out;
00672             do {
00673                 *out++ = (char)(( x % 10 ) + '0');
00674                 numinline++;
00675                 x = x / 10;
00676             } while ( x );
00677             c = out[-1]; out[-1] = *s; *s = c;
00678         }
00679         if ( numinline > 70 ) {
00680             *out = 0;
00681             MesPrint("%s",outbuf);
00682             out = outbuf; numinline = 0;
00683         }
00684         else {
00685             *out++ = ' '; numinline++;
00686         }
00687         in++;
00688     }
00689     if ( numinline > 0 ) { *out = 0; MesPrint("%s",outbuf); }
00690 }
00691
00692 /*
00693     #] WriteTokens :
00694     #[ simpptoken :
00695
00696     Routine substitutes set elements if possible.
00697     This means sets with a fixed argument like setname[3].
00698 */
00699
00700 int simpptoken(SBYTE *s)
00701 {
00702     int error = 0, n, i, base;
00703     WORD numsub;
00704     SBYTE *fill = s, *start, *t, numtab[10];
00705     SETS set;
00706     while ( *s != TENDOFIT ) {
00707         if ( *s == RBRACE ) {
00708             start = fill-1;
00709             while ( *start != LBRACE ) start--;
00710             t = start - 1;
00711             while ( *t >= 0 ) t--;
00712             if ( *t == TSET && ( start[1] == TNUMBER || start[1] == TNUMBER1 ) ) {
00713                 base = start[1] == TNUMBER ? 100: 128;
00714                 start += 2;
00715                 numsub = *start++;
00716                 while ( *start >= 0 && start < fill )
00717                     { numsub = base*numsub + *start++; }
00718                 if ( start == fill ) {
00719                     start = t;
00720                     t++; n = *t++; while ( *t >= 0 ) { n = 128*n + *t++; }
00721                     set = Sets+n;
00722                     if ( ( set->type != CRANGE )
00723                         && ( numsub > 0 && numsub <= set->last-set->first ) ) {
00724                         fill = start;
00725                         n = SetElements[set->first+numsub-1];
00726                         switch (set->type) {
00727                             case CSYMBOL:
00728                                 if ( n > MAXPOWER ) {
00729                                     n -= 2*MAXPOWER;
00730                                     if ( n < 0 ) { n = -n; *fill++ = TMINUS; }
00731                                     *fill++ = TNUMBER1;
00732                                 }
00733                                 else *fill++ = TSYMBOL;
00734                                 break;
00735                             case CINDEX:
00736                                 if ( n < AM.OffsetIndex ) *fill++ = TNUMBER1;
00737                                 else {
00738                                     *fill++ = TINDEX;
00739                                     n -= AM.OffsetIndex;
00740                                 }
00741                                 break;
00742                             case CVECTOR:
00743                                 *fill++ = TVECTOR;
00744                                 n -= AM.OffsetVector;
00745                                 break;

```

```

00744             case CFUNCTION: *fill++ = TFUNCTION;
00745                 n -= FUNCTION; break;
00746             case CNUMBER: *fill++ = TNUMBER1; break;
00747             case CDUBIOUS: *fill++ = TDUBIOUS; n = 1; break;
00748         }
00749         i = 0;
00750     if ( n < 0 ) {
00751         MesPrint("Value of n = %d",n);
00752     }
00753         do { numtab[i++] = (SBYTE)(n & 0x7F); n >>= 7; } while ( n );
00754         while ( --i >= 0 ) *fill++ = numtab[i];
00755     }
00756     else {
00757         MesPrint("&Illegal element %d in set",numsub);
00758         error++;
00759     }
00760     s++; continue;
00761 }
00762 }
00763 *fill++ = *s++;
00764 }
00765 else *fill++ = *s++;
00766 }
00767 *fill++ = TENDOFIT;
00768 return(error);
00769 }
00770
00771 /*
00772     #] simpptoken :
00773     #[ simpwtoken :
00774
00775     Only to be called in the LHS.
00776     Hunts down the wildcards and writes them to the wildcardbuffer.
00777     Next it causes the ProtoType to be constructed.
00778     All wildcards are simplified into the trailing TWILDCARD,
00779     because the specifics are stored in the prototype.
00780     These specifics also include the transfer of wildcard values
00781     to $variables.
00782
00783     Types of wildcards:
00784     a?, a?set, a?!set, a?set[i], A?set1?set2, ?a
00785     After this we can strip the set information.
00786     We still need the ? because of the wildcarding offset in code generation
00787 */
00788
00789 int simpwtoken(SBYTE *s)
00790 {
00791     int error = 0, first = 1, notflag;
00792     WORD num, numto, numdollar, *w = AC.WildC, *wstart, *wtop;
00793     SBYTE *fill = s, *t, *v, *s0 = s;
00794     while ( *s != TENDOFIT ) {
00795         if ( *s == TWILDCARD ) {
00796             notflag = 0; t = fill;
00797             while ( t > s0 && t[-1] >= 0 ) t--;
00798             v = t; num = 0; *fill++ = *s++;
00799             while ( *v >= 0 ) num = 128*num + *v++;
00800             if ( t > s0 ) t--;
00801             AC.NwildC += 4;
00802             if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00803             switch ( *t ) {
00804                 case TSYMBOL:
00805                 case TDUBIOUS:
00806                     *w++ = SYMTOSYM; *w++ = 4; *w++ = num; *w++ = num; break;
00807                 case TINDEX:
00808                     num += AM.OffsetIndex;
00809                     *w++ = INDTOIND; *w++ = 4; *w++ = num; *w++ = num; break;
00810                 case TVECTOR:
00811                     num += AM.OffsetVector;
00812                     *w++ = VECTOVEC; *w++ = 4; *w++ = num; *w++ = num; break;
00813                 case TFUNCTION:
00814                     num += FUNCTION;
00815                     *w++ = FUNTOFUN; *w++ = 4; *w++ = num; *w++ = num; break;
00816                 default:
00817                     MesPrint("&Illegal type of wildcard in LHS");
00818                     error = -1;
00819                     *w++ = SYMTOSYM; *w++ = 4; *w++ = num; *w++ = num; break;
00820             }
00821         }
00822     }
00823     /*
00824     Now the sets. The s pointer sits after the ?
00825     */
00826     wstart = w;
00827     if ( *s == TNOT && s[1] == TSET ) { notflag = 1; s++; }
00828     if ( *s == TSET ) {
00829         s++; num = 0; while ( *s >= 0 ) num = 128*num + *s++;
00830         if ( notflag == 0 && *s == TWILDCARD && s[1] == TSET ) {
00831             s += 2; numto = 0; while ( *s >= 0 ) numto = 128*numto + *s++;

```

```

00831         if ( num < AM.NumFixedSets || numto < AM.NumFixedSets
00832         || Sets[num].type == CRANGE || Sets[numto].type == CRANGE ) {
00833             MesPrint("&This type of set not allowed in this wildcard construction");
00834             error = 1;
00835         }
00836         else {
00837             AC.NwildC += 4;
00838             if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00839             *w++ = FROMSET; *w++ = 4; *w++ = num; *w++ = numto;
00840             wstart = w;
00841         }
00842     }
00843     else if ( notflag == 0 && *s == LBRACE && s[1] == TSYMBOL ) {
00844         if ( num < AM.NumFixedSets || Sets[num].type == CRANGE ) {
00845             MesPrint("&This type of set not allowed in this wildcard construction");
00846             error = 1;
00847         }
00848         v = s; s += 2;
00849         numto = 0; while ( *s >= 0 ) numto = 128*numto + *s++;
00850         if ( *s == TWILDCARD ) s++; /* most common mistake */
00851         if ( *s == RBRACE ) {
00852             s++;
00853             AC.NwildC += 8;
00854             if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00855             *w++ = SETTONUM; *w++ = 4; *w++ = num; *w++ = numto;
00856             wstart = w;
00857             *w++ = SYMTOSYM; *w++ = 4; *w++ = numto; *w++ = 0;
00858         }
00859         else if ( *s == TDOLLAR ) {
00860             s++; numdollar = 0;
00861             while ( *s >= 0 ) numdollar = 128*numdollar + *s++;
00862             if ( *s == RBRACE ) {
00863                 s++;
00864                 AC.NwildC += 12;
00865                 if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00866                 *w++ = SETTONUM; *w++ = 4; *w++ = num; *w++ = numto;
00867                 wstart = w;
00868                 *w++ = SYMTOSYM; *w++ = 4; *w++ = numto; *w++ = 0;
00869                 *w++ = LOADDOLLAR; *w++ = 4; *w++ = numdollar;
00870                 *w++ = numdollar;
00871             }
00872             else { s = v; goto singlewild; }
00873         }
00874         else { s = v; goto singlewild; }
00875     }
00876     else {
00877 singlewild:
00878         num += notflag * 2*WILDOFFSET;
00879         AC.NwildC += 4;
00880         if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00881         *w++ = FROMSET; *w++ = 4; *w++ = num; *w++ = -WILDOFFSET;
00882         wstart = w;
00883     }
00884     else if ( *s != TDOLLAR && *s != TENDOFIT && *s != RPARENTHESIS
00885     && *s != RBRACE && *s != TCOMMA && *s != TFUNCLOSE && *s != TMULTIPLY
00886     && *s != TPOWER && *s != TDIVIDE && *s != TPLUS && *s != TMINUS
00887     && *s != TPOWER1 && *s != TEMPTY && *s != TFUNOPEN && *s != TDOT ) {
00888         MesPrint("&Illegal type of wildcard in LHS");
00889         error = -1;
00890     }
00891     if ( *s == TDOLLAR ) {
00892         s++; numdollar = 0;
00893         while ( *s >= 0 ) numdollar = 128*numdollar + *s++;
00894         AC.NwildC += 4;
00895         if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00896         wtop = w + 4;
00897         if ( wstart < w ) {
00898             while ( w > wstart ) { w[4] = w[0]; w--; }
00899         }
00900         *w++ = LOADDOLLAR; *w++ = 4; *w++ = numdollar; *w++ = numdollar;
00901         w = wtop;
00902     }
00903 }
00904 else if ( *s == TWILDARG ) {
00905     *fill++ = *s++;
00906     num = 0;
00907     while ( *s >= 0 ) { num = 128*num + *s; *fill++ = *s++; }
00908     AC.NwildC += 4;
00909     if ( AC.NwildC > 4*AM.MaxWildcards ) {
00910 firsterr:
00911         if ( first ) {
00912             MesPrint("&More than %d wildcards",AM.MaxWildcards);
00913             error = -1;
00914             first = 0;
00915         }
00916     }
00917     else { *w++ = ARGTOARG; *w++ = 4; *w++ = num; *w++ = -1; }
00918     if ( *s == TDOLLAR ) {

```



```

00918         s++; num = 0; while ( *s >= 0 ) num = 128*num + *s++;
00919         AC.NwildC += 4;
00920         if ( AC.NwildC > 4*AM.MaxWildcards ) goto firsterr;
00921         *w++ = LOADDOLLAR; *w++ = 4; *w++ = num; *w++ = num;
00922     }
00923 }
00924     else *fill++ = *s++;
00925 }
00926 *fill++ = TENDOFIT;
00927 AC.WildC = w;
00928 return(error);
00929 }
00930
00931 /*
00932     #] simpwtoken :
00933     #[ simp2token :
00934
00935     Deals with function arguments.
00936     The tokenizer has given function arguments extra parentheses.
00937     We remove the double parentheses.
00938     Next we remove the parentheses around the simple arguments.
00939
00940     It also replaces /fac_() by *invfac_() and /invfac_() by *fac_()
00941 */
00942
00943 int simp2token(SBYTE *s)
00944 {
00945     SBYTE *to, *fill, *t, *v, *w, *s0 = s, *vv;
00946     int error = 0, n;
00947     /*
00948     Set substitutions
00949     */
00950     fill = to = s;
00951     while ( *s != TENDOFIT ) {
00952         if ( *s == LPARENTHESIS && s[1] == LPARENTHESIS ) {
00953             t = s+1; n = 0;
00954             while ( n >= 0 ) {
00955                 t++;
00956                 if ( *t == LPARENTHESIS ) n++;
00957                 else if ( *t == RPARENTHESIS ) n--;
00958             }
00959             if ( t[1] == RPARENTHESIS ) {
00960                 *t = EMPTY; s++;
00961             }
00962             *fill++ = *s++;
00963         }
00964         else if ( *s == EMPTY ) s++;
00965         else if ( *s == AM.facnum && ( fill > (s0+1) ) && fill[-2] == TDIVIDE
00966             && fill[-1] == TFUNCTION ) {
00967             fill[-2] = TMULTIPLY; *fill++ = (SBYTE)(AM.invfacnum); s++;
00968         }
00969         else if ( *s == AM.invfacnum && ( fill > (s0+1) ) && fill[-2] == TDIVIDE
00970             && fill[-1] == TFUNCTION ) {
00971             fill[-2] = TMULTIPLY; *fill++ = (SBYTE)(AM.facnum); s++;
00972         }
00973         else *fill++ = *s++;
00974     }
00975     *fill++ = TENDOFIT;
00976     /*
00977     Second round: try to locate 'simple' arguments and strip their brackets
00978
00979     We add (9-feb-2010) to the simple arguments integers of any size
00980     */
00981     fill = s = to;
00982     while ( *s != TENDOFIT ) {
00983         if ( *s == LPARENTHESIS ) {
00984             t = s; n = 0;
00985             while ( n >= 0 ) {
00986                 t++;
00987                 if ( *t == LPARENTHESIS ) n++;
00988                 else if ( *t == RPARENTHESIS ) n--;
00989             }
00990             if ( t[1] == TFUNCLOSE && s[1] != TWILDARG ) { /* Check for last argument in sum */
00991                 v = fill - 1; n = 0;
00992                 while ( n >= 0 && v >= to ) {
00993                     if ( *v == TFUNOPEN ) n--;
00994                     else if ( *v == TFUNCLOSE ) n++;
00995                     v--;
00996                 }
00997                 if ( v > to ) {
00998                     while ( *v >= 0 ) v--;
00999                     if ( *v == TFUNCTION ) { v++;
01000                         n = 0; while ( *v >= 0 && v < fill ) n = 128*n + *v++;
01001                         if ( n == AM.sumnum || n == AM.sumpnum ) {
01002                             *fill++ = *s++; continue;
01003                         }
01004                     }
01005                     else if ( ( n == (FIRSTBRACKET-FUNCTION)

```

```

01005         || n == (TERMSINEXPR-FUNCTION)
01006         || n == (SIZEOFFUNCTION-FUNCTION)
01007         || n == (NUMFACTORS-FUNCTION)
01008         || n == (GCDFUNCTION-FUNCTION)
01009         || n == (DIVFUNCTION-FUNCTION)
01010         || n == (REMFUNCTION-FUNCTION)
01011         || n == (INVERSEFUNCTION-FUNCTION)
01012         || n == (MULFUNCTION-FUNCTION)
01013         || n == (FACTORIN-FUNCTION)
01014         || n == (FIRSTTERM-FUNCTION)
01015         || n == (CONTENTTERM-FUNCTION) )
01016     && fill[-1] == TFUNOPEN ) {
01017         v = s+1;
01018         if ( *v == TEXPRESSON ) {
01019             v++;
01020             n = 0; while ( *v >= 0 ) n = 128*n + *v++;
01021             if ( v == t ) {
01022                 *t = TEMPY; s++;
01023             }
01024         }
01025     }
01026 }
01027 }
01028 }
01029 if ( ( fill > to )
01030 && ( ( fill[-1] == TFUNOPEN || fill[-1] == TCOMMA )
01031 && ( t[1] == TFUNCLOSE || t[1] == TCOMMA ) ) ) {
01032     v = s + 1;
01033     switch ( *v ) {
01034         case TMINUS:
01035             v++;
01036             if ( *v == TVECTOR ) {
01037                 w = v+1; while ( *w >= 0 ) w++;
01038                 if ( w == t ) {
01039                     *t = TEMPY; s++;
01040                 }
01041             }
01042             else {
01043                 if ( *v == TNUMBER || *v == TNUMBER1 ) {
01044                     if ( BITSINWORD == 16 ) { ULONG x; WORD base;
01045                         base = ( *v == TNUMBER ) ? 100: 128;
01046                         vv = v+1; x = 0; while ( *vv >= 0 ) { x = x*base + *vv++; }
01047                         if ( ( vv != t ) || ( ( vv - v ) > 4 ) || ( x > (MAXPOSITIVE+1) ) )
01048                             *fill++ = *s++;
01049                         else { *t = TEMPY; s++; break; }
01050                     }
01051                     else if ( BITSINWORD == 32 ) { ULONG x; WORD base;
01052                         base = ( *v == TNUMBER ) ? 100: 128;
01053                         vv = v+1; x = 0; while ( *vv >= 0 ) { x = x*base + *vv++; }
01054                         if ( ( vv != t ) || ( ( vv - v ) > 6 ) || ( x > (MAXPOSITIVE+1) ) )
01055                             *fill++ = *s++;
01056                         else { *t = TEMPY; s++; break; }
01057                     }
01058                     else {
01059                         if ( ( v+2 == t ) || ( v+3 == t && v[2] >= 0 ) )
01060                             { *t = TEMPY; s++; break; }
01061                         else *fill++ = *s++;
01062                     }
01063                 }
01064             else if ( *v == LPARENTHESIS && t[-1] == RPARENTHESIS ) {
01065                 w = v; n = 0;
01066                 while ( n >= 0 ) {
01067                     w++;
01068                     if ( *w == LPARENTHESIS ) n++;
01069                     else if ( *w == RPARENTHESIS ) n--;
01070                 }
01071                 if ( w == ( t-1 ) ) { *t = TEMPY; s++; }
01072                 else *fill++ = *s++;
01073             }
01074             else *fill++ = *s++;
01075             break;
01076         }
01077     /* fall through */
01078     case TSETNUM:
01079         v++; while ( *v >= 0 ) v++;
01080         goto tcommon;
01081     case TSYMBOL:
01082         if ( ( v[1] == COEFFSYMBOL || v[1] == NUMERATORSYMBOL
01083             || v[1] == DENOMINATORSYMBOL ) && v[2] < 0 ) {
01084             *fill++ = *s++; break;
01085         }
01086     /* fall through */
01087     case TSET:
01088     case TVECTOR:
01089     case TINDEX:
01090     case TFUNCTION:
01091     case TDOLLAR:

```

```

01092         case TDUBIOUS:
01093         case TSGAMMA:
01094             tcommon:
01095                 v++; while ( *v >= 0 ) v++;
01096                 if ( v == t || ( v[0] == TWILDCARD && v+1 == t ) )
01097                     { *t = TEMPT; s++; }
01098                 else *fill++ = *s++;
01099                 break;
01100         case TGENINDEX:
01101             v++;
01102             if ( v == t ) { *t = TEMPT; s++; }
01103             else *fill++ = *s++;
01104             break;
01105         case TNUMBER:
01106         case TNUMBER1:
01107             if ( BITSINWORD == 16 ) { ULONG x; WORD base;
01108                 base = ( *v == TNUMBER ) ? 100: 128;
01109                 vv = v+1; x = 0; while ( *vv >= 0 ) { x = x*base + *vv++; }
01110                 if ( ( vv != t ) || ( ( vv - v ) > 4 ) || ( x > MAXPOSITIVE ) )
01111                     *fill++ = *s++;
01112                 else { *t = TEMPT; s++; break; }
01113             }
01114             else if ( BITSINWORD == 32 ) { ULONG x; WORD base;
01115                 base = ( *v == TNUMBER ) ? 100: 128;
01116                 vv = v+1; x = 0; while ( *vv >= 0 ) { x = x*base + *vv++; }
01117                 if ( ( vv != t ) || ( ( vv - v ) > 6 ) || ( x > MAXPOSITIVE ) )
01118                     *fill++ = *s++;
01119                 else { *t = TEMPT; s++; break; }
01120             }
01121             else {
01122                 if ( ( v+2 == t ) || ( v+3 == t && v[2] >= 0 ) )
01123                     { *t = TEMPT; s++; break; }
01124                 else *fill++ = *s++;
01125             }
01126             break;
01127         case TWILDARG:
01128             v++; while ( *v >= 0 ) v++;
01129             if ( v == t ) { *t = TEMPT; s++; }
01130             else *fill++ = *s++;
01131             break;
01132         case TEXPRESS:
01133             /*
01134             First establish that there is only the expression
01135             in this argument.
01136             */
01137             vv = s+1;
01138             while ( vv < t ) {
01139                 if ( *vv != TEXPRESS ) break;
01140                 vv++; while ( *vv >= 0 ) vv++;
01141             }
01142             if ( vv < t ) { *fill++ = *s++; break; }
01143             /*
01144             Find the function
01145             */
01146             w = fill-1; n = 0;
01147             while ( n >= 0 && w >= to ) {
01148                 if ( *w == TFUNOPEN ) n--;
01149                 else if ( *w == TFUNCLOSE ) n++;
01150                 w--;
01151             }
01152             w--; while ( w > to && *w >= 0 ) w--;
01153             if ( *w != TFUNCTION ) { *fill++ = *s++; break; }
01154             w++; n = 0;
01155             while ( *w >= 0 ) { n = 128*n + *w++; }
01156             if ( n == GCDFUNCTION-FUNCTION
01157                 || n == DIVFUNCTION-FUNCTION
01158                 || n == REMFUNCTION-FUNCTION
01159                 || n == INVERSEFUNCTION-FUNCTION
01160                 || n == MULFUNCTION-FUNCTION ) {
01161                 *t = TEMPT; s++;
01162             }
01163             else *fill++ = *s++;
01164             break;
01165         default: *fill++ = *s++; break;
01166     }
01167     }
01168     else *fill++ = *s++;
01169 }
01170 else if ( *s == TEMPT ) s++;
01171 else *fill++ = *s++;
01172 }
01173 *fill++ = TENDOFIT;
01174 return(error);
01175 }
01176 /*
01177 #] simp2token :
01178 #[ simp3atoken :

```

```

01179
01180     We hunt for denominators and exponents that seem hidden.
01181     For the denominators we have to recognize:
01182         /fun /fun() /fun^power /fun()^power
01183         /set[n] /set[n]() /set[n]^power /set[n]()^power
01184         /symbol^power (power no number or symbol wildcard)
01185         /dotpr^power (id)
01186         /#^power (id)
01187         /() /()^power
01188         /vect /index /vect(anything) /vect(anything)^power
01189 */
01190
01191 int simp3atoken(SBYTE *s, int mode)
01192 {
01193     int error = 0, n, numexp = 0, denom, base, numprot, i;
01194     SBYTE *t, c;
01195     LONG num;
01196     WORD *prot;
01197     if ( mode == RHSIDE ) {
01198         prot = AC.ProtoType;
01199         numprot = prot[1] - SUBEXPSIZE;
01200         prot += SUBEXPSIZE;
01201     }
01202     else { prot = 0; numprot = 0; }
01203     while ( *s != TENDOFIT ) {
01204         denom = 1;
01205         if ( *s == TDIVIDE ) { denom = -1; s++; }
01206         c = *s;
01207         switch(c) {
01208             case TSYMBOL:
01209             case TNUMBER:
01210             case TNUMBER1:
01211                 s++; while ( *s >= 0 ) s++; /* skip the object */
01212                 if ( *s == TWILDCARD ) s++; /* and the possible wildcard */
01213             dosymbol:
01214                 if ( *s != TPOWER ) continue; /* No power -> done */
01215                 s++; /* Skip the power */
01216                 if ( *s == TMINUS ) s++; /* negative: no difference here */
01217                 if ( *s == TNUMBER || *s == TNUMBER1 ) {
01218                     base = *s == TNUMBER ? 100: 128; /* NUMBER = base 100 */
01219                     s++; /* Now we compose the power */
01220                     num = s++; /* If the number is way too large */
01221                     while ( *s >= 0 ) { /* it may look like not too big */
01222                         if ( num > MAXPOWER ) break; /* Hence... */
01223                         num = base*num + *s++;
01224                     }
01225                     while ( *s >= 0 ) s++; /* Finish the number if needed */
01226                     if ( *s == TPOWER ) goto doublepower;
01227                     if ( num <= MAXPOWER ) continue; /* Simple case */
01228                 }
01229                 else if ( *s == TSYMBOL && c != TNUMBER && c != TNUMBER1 ) {
01230                     s++; n = 0; while ( *s >= 0 ) { n = 128*n + *s++; }
01231                     if ( *s == TWILDCARD ) { s++;
01232                         if ( *s == TPOWER ) goto doublepower;
01233                         continue; }
01234                 /*
01235                 Now we have to test whether n happens to be a wildcard
01236                 */
01237                 if ( mode == RHSIDE ) {
01238                     n += 2*MAXPOWER;
01239                     for ( i = 0; i < numprot; i += 4 ) {
01240                         if ( prot[i+2] == n && prot[i] == SYMTOSYM ) break;
01241                     }
01242                     if ( i < numprot ) break;
01243                 }
01244                 if ( *s == TPOWER ) goto doublepower;
01245             }
01246             numexp++;
01247             break;
01248         case TINDEX:
01249             s++; while ( *s >= 0 ) s++;
01250             if ( *s == TWILDCARD ) s++;
01251             doindex:
01252                 if ( denom < 0 || *s == TPOWER ) {
01253                     MesPrint("&Index to a power or in denominator is illegal");
01254                     error = 1;
01255                 }
01256                 break;
01257         case TVECTOR:
01258             s++; while ( *s >= 0 ) s++;
01259             if ( *s == TWILDCARD ) s++;
01260             dovector:
01261                 if ( *s == TFUNOPEN ) {
01262                     s++; n = 1;
01263                     for (;;) {
01264                         if ( *s == TFUNOPEN ) {
01265                             n++;

```

```

01266             MesPrint("&Illegal vector index");
01267             error = 1;
01268         }
01269         else if ( *s == TFUNCLOSE ) {
01270             n--;
01271             if ( n <= 0 ) break;
01272         }
01273         s++;
01274     }
01275     s++;
01276 }
01277 else if ( *s == TDOT ) goto dodot;
01278 if ( denom < 0 || *s == TPOWER || *s == TPOWER1 ) numexp++;
01279 break;
01280 case TFUNCTION:
01281     s++; while ( *s >= 0 ) s++;
01282     if ( *s == TWILDCARD ) s++;
01283 dofunction:
01284     t = s;
01285     if ( *t == TFUNOPEN ) {
01286         t++; n = 1;
01287         for(;;) {
01288             if ( *t == TFUNOPEN ) n++;
01289             else if ( *t == TFUNCLOSE ) { if ( --n <= 0 ) break; }
01290             t++;
01291         }
01292         t++; s++;
01293     }
01294     if ( denom < 0 || *t == TPOWER || *t == TPOWER1 ) numexp++;
01295     break;
01296 #ifdef WITHFLOAT
01297 case TFLOAT:
01298     s++; while ( *s >= 0 ) s++;
01299     if ( denom < 0 || *s == TPOWER || *s == TPOWER1 ) numexp++;
01300     break;
01301 #endif
01302 case TEXPRESSION:
01303     s++; while ( *s >= 0 ) s++;
01304     t = s;
01305     if ( *t == TFUNOPEN ) {
01306         t++; n = 1;
01307         for(;;) {
01308             if ( *t == TFUNOPEN ) n++;
01309             else if ( *t == TFUNCLOSE ) { if ( --n <= 0 ) break; }
01310             t++;
01311         }
01312         t++;
01313     }
01314     if ( *t == LBRACE ) {
01315         t++; n = 1;
01316         for(;;) {
01317             if ( *t == LBRACE ) n++;
01318             else if ( *t == RBRACE ) { if ( --n <= 0 ) break; }
01319             t++;
01320         }
01321         t++;
01322     }
01323     if ( denom < 0 || ( ( *t == TPOWER || *t == TPOWER1 )
01324         && t[1] == TMINUS ) ) numexp++;
01325     break;
01326 case TDOLLAR:
01327     s++; while ( *s >= 0 ) s++;
01328     if ( denom < 0 || ( ( *s == TPOWER || *s == TPOWER1 )
01329         && s[1] == TMINUS ) ) numexp++;
01330     break;
01331 case LPARENTHESIS:
01332     s++; n = 1; t = s;
01333     for(;;) {
01334         if ( *t == LPARENTHESIS ) n++;
01335         else if ( *t == RPARENTHESIS ) { if ( --n <= 0 ) break; }
01336         t++;
01337     }
01338     t++;
01339     if ( denom > 0 && ( *t == TPOWER || *t == TPOWER1 ) ) {
01340         if ( ( t[1] == TNUMBER || t[1] == TNUMBER1 ) && t[2] >= 0
01341             && t[3] < 0 ) break;
01342         numexp++;
01343     }
01344     else if ( denom < 0 && ( *t == TPOWER || *t == TPOWER1 ) ) {
01345         if ( t[1] == TMINUS && ( t[2] == TNUMBER
01346             || t[2] == TNUMBER1 ) && t[3] >= 0
01347             && t[4] < 0 ) break;
01348         numexp++;
01349     }
01350     else if ( denom < 0 || ( ( *t == TPOWER || *t == TPOWER1 )
01351         && ( t[1] == TMINUS || t[1] == LPARENTHESIS ) ) ) numexp++;
01352     break;

```

```

01353         case TSET:
01354             s++; n = *s++; while ( *s >= 0 ) { n = 128*n + *s++; }
01355             n = Sets[n].type;
01356             switch ( n ) {
01357                 case CSYMBOL: goto dosymbol;
01358                 case CINDEX: goto doindex;
01359                 case CVECTOR: goto dovector;
01360                 case CFUNCTION: goto dofunction;
01361                 case CNUMBER: goto dosymbol;
01362                 case CMODEL:
01363                     if ( denom < 0 || *s == TPOWER ) {
01364                         MesPrint("%A model to a power or in denominator is illegal");
01365                         error = 1;
01366                     }
01367                     break;
01368                 case ANYTYPE:
01369                     if ( denom < 0 || *s == TPOWER ) {
01370                         MesPrint("%A set without type to a power or in denominator is illegal");
01371                         error = 1;
01372                     }
01373                     break;
01374                 default: error = 1; break;
01375             }
01376             break;
01377         case TDOT:
01378             dodot:
01379             s++;
01380             if ( *s == TVECTOR ) { s++; while ( *s >= 0 ) s++; }
01381             else if ( *s == TSET ) {
01382                 s++; n = *s++; while ( *s >= 0 ) { n = 128*n + *s++; }
01383                 if ( Sets[n].type != CVECTOR ) {
01384                     MesPrint("&Set in dotproduct is not a set of vectors");
01385                     error = 1;
01386                 }
01387                 if ( *s == LBRACE ) {
01388                     s++; n = 1;
01389                     for(;;) {
01390                         if ( *s == LBRACE ) n++;
01391                         else if ( *s == RBRACE ) { if ( --n <= 0 ) break; }
01392                         s++;
01393                     }
01394                 }
01395                 else {
01396                     MesPrint("&Set without argument in dotproduct");
01397                     error = 1;
01398                 }
01399             }
01400             else if ( *s == TSETNUM ) {
01401                 s++; n = *s++; while ( *s >= 0 ) { n = 128*n + *s++; }
01402                 if ( *s != TVECTOR ) goto nodot;
01403                 s++; n = *s++; while ( *s >= 0 ) { n = 128*n + *s++; }
01404                 if ( Sets[n].type != CVECTOR ) {
01405                     MesPrint("&Set in dotproduct is not a set of vectors");
01406                     error = 1;
01407                 }
01408             }
01409             else {
01410                 nodot:
01411                 MesPrint("&Illegal second element in dotproduct");
01412                 error = 1;
01413                 s++; while ( *s >= 0 ) s++;
01414             }
01415             goto dosymbol;
01416         default:
01417             s++; while ( *s >= 0 ) s++;
01418             break;
01419     }
01420     if ( error ) return(-1);
01421     return(numexp);
01422 doublepower:
01423     MesPrint("&Dubious notation with object^power1^power2");
01424     return(-1);
01425 }
01426
01427 /*
01428     #] simp3atoken :
01429     #[ simp3btoken :
01430 */
01431
01432 int simp3btoken(SBYTE *s, int mode)
01433 {
01434     int error = 0, i, numprot, n, denom, base, inset = 0, dotp, sube = 0;
01435     SBYTE *t, c, *fill, *ff, *ss;
01436     LONG num;
01437     WORD *prot;
01438
01439     // Work in a temporary buffer, to avoid clashes between input and output

```

```

01440     SBYTE *tmptokens = (SBYTE*)Malloc1((AC.toptokens-AC.tokens)*sizeof(SBYTE), "simp3btoken scratch");
01441     SBYTE* tmptoptokens = tmptokens + (AC.toptokens-AC.tokens);
01442     fill = tmptokens;
01443
01444     if ( mode == RHSIDE ) {
01445         prot = AC.ProtoType;
01446         numprot = prot[1] - SUBEXPSIZE;
01447         prot += SUBEXPSIZE;
01448     }
01449     else { prot = 0; numprot = 0; }
01450     while ( *s == EMPTY ) s++;
01451     while ( *s != TENDOFIT ) {
01452         // If we are near the end of the output buffer, we'd better reallocate
01453         // both tmptokens and AC.tokens (which must fit the final result).
01454         // Experimentally, fill can move by at most 5 per loop iteration, but
01455         // this buffer of 20 of might not be enough for all cases!
01456         while ( tmptoptokens - fill < 20 ) {
01457             LONG tmppos;
01458             tmppos = s - AC.tokens;
01459             DoubleBuffer((void*)&(AC.tokens), (void*)&(AC.toptokens), sizeof(SBYTE), "simp3btoken
double");
01460             s = AC.tokens + tmppos;
01461             tmppos = fill - tmptokens;
01462             DoubleBuffer((void*)&tmptokens, (void*)&tmptoptokens, sizeof(SBYTE), "simp3btoken
scratch double");
01463             fill = tmptokens + tmppos;
01464         }
01465         if ( *s == EMPTY ) { s++; continue; }
01466         denom = 1;
01467         if ( *s == TDIVIDE ) { denom = -1; *fill++ = *s++; }
01468         ff = fill; ss = s; c = *s;
01469         if ( c == TSETNUM ) {
01470             *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01471             c = *s;
01472         }
01473         dotp = 0;
01474         switch(c) {
01475             case TSYMBOL:
01476             case TNUMBER:
01477             case TNUMBER1:
01478                 *fill++ = *s++;
01479                 while ( *s >= 0 ) *fill++ = *s++;
01480                 if ( *s == TWILDCARD ) *fill++ = *s++;
01481             dosymbol:
01482                 t = s;
01483                 if ( *s != TPOWER ) continue;
01484                 *fill++ = *s++;
01485                 if ( *s == TMINUS ) *fill++ = *s++;
01486                 if ( *s == TPLUS ) s++;
01487                 if ( *s == TSETNUM ) {
01488                     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01489                     inset = 1;
01490                 }
01491                 else inset = 0;
01492                 if ( *s == TNUMBER || *s == TNUMBER1 ) {
01493                     base = *s == TNUMBER ? 100: 128;
01494                     *fill++ = *s++;
01495                     num = *s++; *fill++ = num;
01496                     while ( *s >= 0 ) {
01497                         if ( num > MAXPOWER ) break;
01498                         *fill++ = *s;
01499                         num = base*num + *s++;
01500                     }
01501                     while ( *s >= 0 ) *fill++ = *s++;
01502                     if ( num <= MAXPOWER ) continue;
01503                     goto putexpl;
01504                 }
01505                 else if ( *s == TSYMBOL && c != TNUMBER && c != TNUMBER1 ) {
01506                     *fill++ = *s++;
01507                     n = 0; while ( *s >= 0 ) { n = 128*n + *s; *fill++ = *s++; }
01508                     if ( *s == TWILDCARD ) { *fill++ = *s++;
01509                         if ( *s == TPOWER ) goto doublepower;
01510                     break; }
01511 /*
01512     Now we have to test whether n happens to be a wildcard
01513 */
01514     if ( mode == RHSIDE && inset == 0 ) {
01515 /*
01516         n += WILDOFFSET;*/
01517         for ( i = 0; i < numprot; i += 4 ) {
01518             if ( prot[i+2] == n && prot[i] == SYMTOSYM ) break;
01519         }
01520         if ( i < numprot ) break;
01521     }
01522     putexpl:
01523     fill = ff;
01524     if ( denom < 0 ) fill[-1] = TMULTIPLY;
01525     *fill++ = TFUNCTION; *fill++ = (SBYTE)(AM.expnum); *fill++ = TFUNOPEN;

```

```

01525         if ( dotp ) *fill++ = LPARENTHESIS;
01526         while ( ss < t ) *fill++ = *ss++;
01527         if ( dotp ) *fill++ = RPARENTHESIS;
01528         *fill++ = TCOMMA;
01529         ss++; /* Skip TPOWER */
01530         if ( *ss == TMINUS ) { denom = -denom; ss++; }
01531         if ( denom < 0 ) {
01532             *fill++ = LPARENTHESIS;
01533             *fill++ = TMINUS;
01534             while ( ss < s ) *fill++ = *ss++;
01535             *fill++ = RPARENTHESIS;
01536         }
01537         else {
01538             while ( ss < s ) *fill++ = *ss++;
01539         }
01540         *fill++ = TFUNCLOSE;
01541         if ( *ss == TPOWER ) goto doublepower;
01542     }
01543     else { /* other objects can be composite */
01544         goto dofunpower;
01545     }
01546     break;
01547 case TINDEX:
01548     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01549     if ( *s == TWILDCARD ) *fill++ = *s++;
01550     break;
01551 case TVECTOR:
01552     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01553     if ( *s == TWILDCARD ) *fill++ = *s++;
01554 dovector:
01555     if ( *s == TFUNOPEN ) {
01556         while ( *s != TFUNCLOSE ) *fill++ = *s++;
01557         *fill++ = *s++;
01558     }
01559     else if ( *s == TDOT ) goto dodot;
01560     t = s;
01561     goto dofunpower;
01562 #ifdef WITHFLOAT
01563 case TFLOAT:
01564     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01565     t = s;
01566     sube = 0;
01567     goto dofunpower;
01568 #endif
01569 case TFUNCTION:
01570     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01571     if ( *s == TWILDCARD ) *fill++ = *s++;
01572 dofunction:
01573     t = s;
01574     if ( *t == TFUNOPEN ) {
01575         t++; n = 1;
01576         for(;;) {
01577             if ( *t == TFUNOPEN ) n++;
01578             else if ( *t == TFUNCLOSE ) { if ( --n <= 0 ) break; }
01579             t++;
01580         }
01581         t++; *fill++ = *s++;
01582     }
01583     sube = 0;
01584 dofunpower:
01585     if ( *t == TPOWER || *t == TPOWER1 ) {
01586         if ( sube ) {
01587             if ( ( t[1] == TNUMBER || t[1] == TNUMBER1 )
01588                 && denom > 0 ) {
01589                 if ( t[2] >= 0 && t[3] < 0 ) { sube = 0; break; }
01590             }
01591             else if ( t[1] == TMINUS && denom < 0 &&
01592                 ( t[2] == TNUMBER || t[2] == TNUMBER1 ) ) {
01593                 if ( t[2] >= 0 && t[3] < 0 ) { sube = 0; break; }
01594             }
01595             sube = 0;
01596         }
01597         fill = ff;
01598         *fill++ = TFUNCTION; *fill++ = (SBYTE)(AM.expnum); *fill++ = TFUNOPEN;
01599         *fill++ = LPARENTHESIS;
01600         while ( ss < t ) *fill++ = *ss++;
01601         t++;
01602         *fill++ = RPARENTHESIS; *fill++ = TCOMMA;
01603         if ( *t == TMINUS ) { t++; denom = -denom; }
01604         *fill++ = LPARENTHESIS;
01605         if ( denom < 0 ) *fill++ = TMINUS;
01606         if ( *t == LPARENTHESIS ) {
01607             *fill++ = *t++; n = 0;
01608             while ( n >= 0 ) {
01609                 if ( *t == LPARENTHESIS ) n++;
01610                 else if ( *t == RPARENTHESIS ) n--;
01611                 *fill++ = *t++;

```



```

01612     }
01613 }
01614 else if ( *t == TFUNCTION || *t == TDUBIOUS ) {
01615     *fill++ = *t++; while ( *t >= 0 ) *fill++ = *t++;
01616     if ( *t == TWILDCARD ) *fill++ = *t++;
01617     if ( *t == TFUNOPEN ) {
01618         *fill++ = *t++; n = 0;
01619         while ( n >= 0 ) {
01620             if ( *t == TFUNOPEN ) n++;
01621             else if ( *t == TFUNCLOSE ) n--;
01622             *fill++ = *t++;
01623         }
01624     }
01625 }
01626 else if ( *t == TSET ) {
01627     *fill++ = *t++; n = 0;
01628     while ( *t >= 0 ) { n = 128*n + *t; *fill++ = *t++; }
01629     if ( *t == LBRACE ) {
01630         if ( n < AM.NumFixedSets || Sets[n].type == CRANGE ) {
01631             MesPrint("This type of usage of sets is not allowed");
01632             error = 1;
01633         }
01634         *fill++ = *t++; n = 0;
01635         while ( n >= 0 ) {
01636             if ( *t == LBRACE ) n++;
01637             else if ( *t == RBRACE ) n--;
01638             *fill++ = *t++;
01639         }
01640     }
01641 }
01642 else if ( *t == TEXPRESSION ) {
01643     *fill++ = *t++; while ( *t >= 0 ) *fill++ = *t++;
01644     if ( *t == TFUNOPEN ) {
01645         *fill++ = *t++; n = 0;
01646         while ( n >= 0 ) {
01647             if ( *t == TFUNOPEN ) n++;
01648             else if ( *t == TFUNCLOSE ) n--;
01649             *fill++ = *t++;
01650         }
01651     }
01652     if ( *t == LBRACE ) {
01653         *fill++ = *t++; n = 0;
01654         while ( n >= 0 ) {
01655             if ( *t == LBRACE ) n++;
01656             else if ( *t == RBRACE ) n--;
01657             *fill++ = *t++;
01658         }
01659     }
01660 }
01661 else if ( *t == TVECTOR ) {
01662     *fill++ = *t++; while ( *t >= 0 ) *fill++ = *t++;
01663     if ( *t == TFUNOPEN ) {
01664         *fill++ = *t++; n = 0;
01665         while ( n >= 0 ) {
01666             if ( *t == TFUNOPEN ) n++;
01667             else if ( *t == TFUNCLOSE ) n--;
01668             *fill++ = *t++;
01669         }
01670     }
01671     else if ( *t == TDOT ) {
01672         *fill++ = *t++;
01673         if ( *t == TVECTOR || *t == TDUBIOUS ) {
01674             *fill++ = *t++; while ( *t >= 0 ) *fill++ = *t++;
01675         }
01676         else if ( *t == TSET ) {
01677             *fill++ = *t++; num = 0;
01678             while ( *t >= 0 ) { num = 128*num + *t; *fill++ = *t++; }
01679             if ( Sets[num].type != CVECTOR ) {
01680                 MesPrint("&Illegal set type in dotproduct");
01681                 error = 1;
01682             }
01683             if ( *t == LBRACE ) {
01684                 *fill++ = *t++; n = 0;
01685                 while ( n >= 0 ) {
01686                     if ( *t == LBRACE ) n++;
01687                     else if ( *t == RBRACE ) n--;
01688                     *fill++ = *t++;
01689                 }
01690             }
01691         }
01692         else if ( *t == TSETNUM ) {
01693             *fill++ = *t++;
01694             while ( *t >= 0 ) { *fill++ = *t++; }
01695             *fill++ = *t++;
01696             while ( *t >= 0 ) { *fill++ = *t++; }
01697         }
01698     }

```

```

01699         else {
01700             MesPrint("&Illegal second element in dotproduct");
01701             error = 1;
01702         }
01703     }
01704     else {
01705         *fill++ = *t++; while ( *t >= 0 ) *fill++ = *t++;
01706         if ( *t == TWILDCARD ) *fill++ = *t++;
01707     }
01708     *fill++ = RPARENTHESIS; *fill++ = TFUNCLOSE;
01709     if ( *t == TPOWER ) goto doublepower;
01710     while ( fill > ff ) *--t = *--fill;
01711     s = t;
01712 }
01713 else if ( denom < 0 ) {
01714     fill = ff; ff[-1] = TMULTIPLY;
01715     *fill++ = TFUNCTION; *fill++ = (SBYTE) (AM.denomnum);
01716     *fill++ = TFUNOPEN; *fill++ = LPARENTHESIS;
01717     while ( ss < t ) *fill++ = *ss++;
01718     *fill++ = RPARENTHESIS; *fill++ = TFUNCLOSE;
01719     while ( fill > ff ) *--t = *--fill;
01720     s = t; denom = 1; sube = 0;
01721     break;
01722 }
01723 sube = 0;
01724 break;
01725 case TEXPRESSION:
01726     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01727     t = s;
01728     if ( *t == TFUNOPEN ) {
01729         t++; n = 1;
01730         for(;;) {
01731             if ( *t == TFUNOPEN ) n++;
01732             else if ( *t == TFUNCLOSE ) { if ( --n <= 0 ) break; }
01733             t++;
01734         }
01735         t++;
01736     }
01737     if ( *t == LBRACE ) {
01738         t++; n = 1;
01739         for(;;) {
01740             if ( *t == LBRACE ) n++;
01741             else if ( *t == RBRACE ) { if ( --n <= 0 ) break; }
01742             t++;
01743         }
01744         t++;
01745     }
01746     if ( t > s || denom < 0 || ( ( *t == TPOWER || *t == TPOWER1 )
01747         && t[1] == TMINUS ) ) goto dofunpower;
01748     else goto dosymbol;
01749 case TDOLLAR:
01750     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01751     goto dosymbol;
01752 case LPARENTHESIS:
01753     *fill++ = *s++; n = 1; t = s;
01754     for(;;) {
01755         if ( *t == LPARENTHESIS ) n++;
01756         else if ( *t == RPARENTHESIS ) { if ( --n <= 0 ) break; }
01757         t++;
01758     }
01759     t++; sube = 1;
01760     goto dofunpower;
01761 case TSET:
01762     *fill++ = *s++; n = *s++; *fill++ = (SBYTE)n;
01763     while ( *s >= 0 ) { *fill++ = *s; n = 128*n + *s++; }
01764     n = Sets[n].type;
01765     switch ( n ) {
01766         case CSYMBOL: goto dosymbol;
01767         case CINDEX: break;
01768         case CVECTOR: goto dovector;
01769         case CFUNCTION: goto dofunction;
01770         case CNUMBER: goto dosymbol;
01771         case CMODEL: break;
01772         case ANYTYPE: break;
01773         default: error = 1; break;
01774     }
01775     break;
01776 case TDOT:
01777     *fill++ = *s++;
01778     if ( *s == TVECTOR ) {
01779         *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01780     }
01781     else if ( *s == TSET ) {
01782         *fill++ = *s++; n = *s++; *fill++ = (SBYTE)n;
01783         while ( *s >= 0 ) { *fill++ = *s; n = 128*n + *s++; }
01784         if ( *s == LBRACE ) {
01785             if ( n < AM.NumFixedSets || Sets[n].type == CRANGE ) {

```

```

01786             MesPrint("&This type of usage of sets is not allowed");
01787             error = 1;
01788         }
01789         *fill++ = *s++; n = 1;
01790         for(;;) {
01791             if ( *s == LBRACE ) n++;
01792             else if ( *s == RBRACE ) { if ( --n <= 0 ) break; }
01793             *fill++ = *s++;
01794         }
01795         *fill++ = *s++;
01796     }
01797     else {
01798         MesPrint("&Set without argument in dotproduct");
01799         error = 1;
01800     }
01801 }
01802 else if ( *s == TSETNUM ) {
01803     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01804     if ( *s != TVECTOR ) goto nodot;
01805     *fill++ = *s++; while ( *s >= 0 ) *fill++ = *s++;
01806 }
01807 else {
01808     nodot: MesPrint("&Illegal second element in dotproduct");
01809     error = 1;
01810     *fill++ = *s++;
01811     while ( *s >= 0 ) *fill++ = *s++;
01812 }
01813 dotp = 1;
01814 goto dosymbol;
01815 default:
01816     *fill++ = *s++;
01817     while ( *s >= 0 ) *fill++ = *s++;
01818     break;
01819 }
01820 }
01821 *fill = TENDOFIT;
01822 // Now copy the modified tokens back to the original buffer
01823 fill = tmptokens;
01824 s = AC.tokens;
01825 do {
01826     *s++ = *fill;
01827 } while ( *fill++ != TENDOFIT );
01828 M_free(tmptokens, "simp3btoken scratch");
01829 return(error);
01830 doublepower:;
01831 MesPrint("&Dubious notation with power of power");
01832 M_free(tmptokens, "simp3btoken scratch");
01833 return(-1);
01834 }
01835
01836 /*
01837     #] simp3btoken :
01838     #[ simp4token :
01839
01840     Deal with the set[n] objects in the RHS.
01841 */
01842
01843 int simp4token(SBYTE *s)
01844 {
01845     int error = 0, n, nsym, settype;
01846     WORD i, *w, *wstop, level;
01847     SBYTE *const s0 = s;
01848     SBYTE *fill = s, *s1, *s2, *s3, type, slbuf[10];
01849     SBYTE *tbuf = s, *t, *t1;
01850
01851     while ( *s != TENDOFIT ) {
01852         if ( *s != TSET ) {
01853             if ( *s == EMPTY ) s++;
01854             else *fill++ = *s++;
01855             continue;
01856         }
01857         if ( fill >= (s0+1) && fill[-1] == TWILDCARD ) { *fill++ = *s++; continue; }
01858         if ( fill >= (s0+2) && fill[-1] == TNOT && fill[-2] == TWILDCARD ) { *fill++ = *s++; continue; }
01859
01860         s1 = s++; n = 0; while ( *s >= 0 ) { n = 128*n + *s++; }
01861         i = Sets[n].type;
01862         if ( *s != LBRACE ) { while ( s1 < s ) *fill++ = *s1++; continue; }
01863         if ( n < AM.NumFixedSets || i == CRANGE ) {
01864             MesPrint("&It is not allowed to refer to individual elements of built in or ranged sets");
01865             error = 1;
01866         }
01867         s++;
01868         if ( *s != TSYMBOL && *s != TDOLLAR ) {
01869             MesPrint("&Set index in RHS is not a wildcard symbol or $-variable");
01870             error = 1;
01871             while ( s1 < s ) *fill++ = *s1++;
01872             continue;
01873         }

```

```

01872     }
01873     settype = ( *s == TDOLLAR );
01874     s++; nsym = 0; s2 = s;
01875     while ( *s >= 0 ) nsym = 128*nsym + *s++;
01876     if ( *s != RBRACE ) {
01877         MesPrint("&Improper set argument in RHS");
01878         error = 1;
01879         while ( s1 < s ) *fill++ = *s1++;
01880         continue;
01881     }
01882     s++;
01883     /*
01884     Verify that nsym is a wildcard
01885     */
01886     if ( !settype ) {
01887         w = AC.ProtoType; wstop = w + w[1]; w += SUBEXPSIZE;
01888         while ( w < wstop ) {
01889             if ( *w == SYMTOSYM && w[2] == nsym ) break;
01890             w += w[1];
01891         }
01892         if ( w >= wstop ) {
01893             /*
01894             It could still be a summation parameter!
01895             */
01896             t = fill - 1;
01897             while ( t >= tbuf ) {
01898                 if ( *t == TFUNCLOSE ) {
01899                     level = 1; t--;
01900                     while ( t >= tbuf ) {
01901                         if ( *t == TFUNCLOSE ) level++;
01902                         else if ( *t == TFUNOPEN ) {
01903                             level--;
01904                             if ( level == 0 ) break;
01905                         }
01906                         t--;
01907                     }
01908                 }
01909                 else if ( *t == RBRACE ) {
01910                     level = 1; t--;
01911                     while ( t >= tbuf ) {
01912                         if ( *t == RBRACE ) level++;
01913                         else if ( *t == LBRACE ) {
01914                             level--;
01915                             if ( level == 0 ) break;
01916                         }
01917                         t--;
01918                     }
01919                 }
01920                 else if ( *t == RPARENTHESIS ) {
01921                     level = 1; t--;
01922                     while ( t >= tbuf ) {
01923                         if ( *t == RPARENTHESIS ) level++;
01924                         else if ( *t == LPARENTHESIS ) {
01925                             level--;
01926                             if ( level == 0 ) break;
01927                         }
01928                         t--;
01929                     }
01930                 }
01931                 else if ( *t == TFUNOPEN ) {
01932                     t1 = t-1;
01933                     while ( *t1 > 0 && t1 > tbuf ) t1--;
01934                     if ( *t1 == TFUNCTION ) {
01935                         t1++; level = 0;
01936                         while ( *t1 > 0 ) level = level*128+*t1++;
01937                     }
01938                     if ( level == (SUMF1-FUNCTION)
01939                         || level == (SUMF2-FUNCTION) ) {
01939                         t1 = t + 1;
01940                         if ( *t1 == LPARENTHESIS ) t1++;
01941                         if ( *t1 == TSYMBOL ) {
01942                             if ( ( t1[1] == COEFFSYMBOL
01943                                 || t1[1] == NUMERATORSYMBOL
01944                                 || t1[1] == DENOMINATORSYMBOL )
01945                                 && t1[2] < 0 ) {}
01946                             else {
01947                                 t1++; level = 0;
01948                                 while ( *t1 >= 0 && t1 < fill ) level = 128*level + *t1++;
01949                                 if ( level == nsym && t1 < fill ) {
01950                                     if ( t[1] == LPARENTHESIS
01951                                         && *t1 == RPARENTHESIS && t1[1] == TCOMMA ) break;
01952                                     if ( t[1] != LPARENTHESIS && *t1 == TCOMMA ) break;
01953                                 }
01954                             }
01955                         }
01956                     }
01957                 }
01958             }

```

```

01959         t--;
01960     }
01961     if ( t < tbuf ) {
01962         fill--;
01963         MesPrint("&Set index in RHS is not a wildcard symbol");
01964         error = 1;
01965         while ( s1 < s ) *fill++ = *s1++;
01966         continue;
01967     }
01968 }
01969 }
01970 /*
01971     Now replace by a set marker: TSETNUM,nsym,TYPE,setnumber
01972 */
01973     switch ( i ) {
01974         case CSYMBOL: type = TSYMBOL; break;
01975         case CINDEX: type = TINDEX; break;
01976         case CVECTOR: type = TVECTOR; break;
01977         case CFUNCTION: type = TFUNCTION; break;
01978         case CNUMBER: type = TNUMBER1; break;
01979         case CDUBIOUS: type = TDUBIOUS; break;
01980         default:
01981             MesPrint("&Unknown set type in simp4token");
01982             error = 1; type = CDUBIOUS; break;
01983     }
01984     s3 = s1buf; s1++;
01985     while ( *s1 >= 0 ) *s3++ = *s1++;
01986     *s3 = -1; s1 = s1buf;
01987     if ( settype ) *fill++ = TSETDOL;
01988     else *fill++ = TSETNUM;
01989     while ( *s2 >= 0 ) *fill++ = *s2++;
01990     *fill++ = type; while ( *s1 >= 0 ) *fill++ = *s1++;
01991 }
01992 *fill++ = TENDOFIT;
01993 return(error);
01994 }
01995
01996 /*
01997     #] simp4token :
01998     #[ simp5token :
01999
02000     Making sure that first argument of sumfunction is not a wildcard already
02001 */
02002
02003 int simp5token(SBYTE *s, int mode)
02004 {
02005     int error = 0, n, type;
02006     WORD *w, *wstop;
02007     if ( mode == RHSIDE ) {
02008         while ( *s != TENDOFIT ) {
02009             if ( *s == TFUNCTION ) {
02010                 s++; n = 0; while ( *s >= 0 ) n = 128*n + *s++;
02011                 if ( n == AM.sumnum || n == AM.sumpnum ) {
02012                     if ( *s != TFUNOPEN ) continue;
02013                     s++;
02014                     if ( *s != TSYMBOL && *s != TINDEX ) continue;
02015                     type = *s++;
02016                     n = 0; while ( *s >= 0 ) n = 128*n + *s++;
02017                     if ( type == TINDEX ) n += AM.OffsetIndex;
02018                     if ( *s != TCOMMA ) continue;
02019                     w = AC.ProtoType;
02020                     wstop = w + w[1];
02021                     w += SUBEXPSIZE;
02022                     while ( w < wstop ) {
02023                         if ( w[2] == n ) {
02024                             if ( ( type == TSYMBOL && ( w[0] == SYMTOSYM
02025                                 || w[0] == SYMTONUM || w[0] == SYMTOSUB ) ) || (
02026                                 type == TINDEX && ( w[0] == INDTOIND
02027                                 || w[0] == INDTOSUB ) ) ) {
02028                                 error = 1;
02029                                 MesPrint("&Parameter of sum function is already a wildcard");
02030                             }
02031                         }
02032                         w += w[1];
02033                     }
02034                 }
02035             }
02036             else s++;
02037         }
02038     }
02039     return(error);
02040 }
02041
02042 /*
02043     #] simp5token :
02044     #[ simp6token :
02045

```

```

02046     Making sure that factorized expressions are used properly
02047 */
02048
02049 int simp6token(SBYTE *tokens, int mode)
02050 {
02051     /* EXPRESSIONS e = Expressions; */
02052     int error = 0, n;
02053     int level = 0, haveone = 0;
02054     SBYTE *s = tokens, *ss;
02055     LONG numterms;
02056     WORD funnum = 0;
02057     GETIDENTITY
02058     if ( mode == RHSIDE ) {
02059         while ( *s == TPLUS || *s == TMINUS ) s++;
02060         numterms = 1;
02061         while ( *s != TENDOFIT ) {
02062             if ( *s == LPARENTHESIS ) level++;
02063             else if ( *s == RPARENTHESIS ) level--;
02064             else if ( *s == TFUNOPEN ) level++;
02065             else if ( *s == TFUNCLOSE ) level--;
02066             else if ( ( *s == TPLUS || *s == TMINUS ) && level == 0 ) {
02067                 /*
02068                     Special exception: x-1 etc.
02069                 */
02070                 if ( s[-1] != TPOWER && s[-1] != TPLUS && s[-1] != TMINUS ) {
02071                     numterms++;
02072                 }
02073             }
02074             else if ( *s == TEXPRESSION ) {
02075                 ss = s;
02076                 s++; n = 0; while ( *s >= 0 ) n = 128*n + *s++;
02077             }
02078             if ( Expressions[n].status == STOREDEXPRESSION ) {
02079                 POSITION position;
02080                 /*
02081                 #ifdef WITHPTHREADS
02082                     RENUMBER renumber;
02083                 #endif
02084                 */
02085                 RENUMBER renumber;
02086
02087                 WORD TMproto[SUBEXPSIZE];
02088                 TMproto[0] = EXPRESSION;
02089                 TMproto[1] = SUBEXPSIZE;
02090                 TMproto[2] = n;
02091                 TMproto[3] = 1;
02092                 { int ie; for ( ie = 4; ie < SUBEXPSIZE; ie++ ) TMproto[ie] = 0; }
02093                 AT.TMaddr = TMproto;
02094                 PUTZERO(position);
02095                 /*
02096                 #ifdef WITHPTHREADS
02097                     if ( (
02098                         renumber =
02099                     #endif
02100                         GetTable(n,&position,0) ) == 0 )
02101                 */
02102                 if ( ( renumber = GetTable(n,&position,0) ) == 0 )
02103                 {
02104                     error = 1;
02105                     MesPrint("&Problems getting information about stored expression %s(4) "
02106                         ,EXPRNAME(n));
02107                 }
02108                 /*
02109                 #ifdef WITHPTHREADS
02110                 */
02111                 if ( renumber->symb.lo != AN.dummyrenumlist )
02112                     M_free(renumber->symb.lo,"VarSpace");
02113                 M_free(renumber,"Renumber");
02114                 /*
02115                 #endif
02116                 */
02117             }
02118
02119             if ( ( ( AS.Oldvflags[n] & ISFACTORIZED ) != 0 ) && *s != LBRACE ) {
02120                 if ( level == 0 ) {
02121                     haveone = 1;
02122                 }
02123                 else if ( error == 0 ) {
02124                     if ( ss[-1] != TFUNOPEN || funnum != NUMFACTORS-FUNCTION ) {
02125                         MesPrint("&Illegal use of factorized expression(s) in RHS");
02126                         error = 1;
02127                     }
02128                 }
02129             }
02130             continue;
02131         }
02132         else if ( *s == TFUNCTION ) {

```

```

02133         s++; funnum = 0; while ( *s >= 0 ) funnum = 128*fnum + *s++;
02134         continue;
02135     }
02136     s++;
02137 }
02138 if ( haveone ) {
02139     if ( numterms > 1 ) {
02140         MesPrint("&Factorized expression in RHS in an expression of more than one term.");
02141         error = 1;
02142     }
02143     else if ( AC.ToBeInFactors == 0 ) {
02144         MesPrint("&Attempt to put a factorized expression inside an unfactorized
expression.");
02145         error = 1;
02146     }
02147 }
02148 }
02149 return(error);
02150 }
02151
02152 /*
02153     #] simp6token :
02154     #] Compiler :
02155 */

```


4.149 tools.c File Reference

```

#include "form3.h"
#include <sys/timeb.h>

```

Include dependency graph for tools.c:

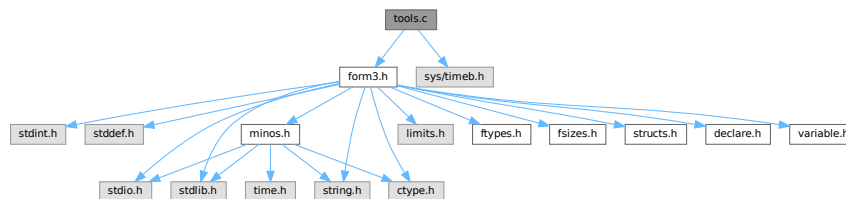

Macros

- #define `FILLVALUE` 0
- #define `COPYFILEBUFSIZE` 40960L
- #define `TERMMEMSTARTNUM` 16
- #define `TERMEXTRAWORDS` 10
- #define `NUMBERMEMSTARTNUM` 16
- #define `NUMBEREXTRAWORDS` 10L
- #define `DODOUBLE(x)`
- #define `DOEXPAND(x)`

Functions

- `UBYTE *` `LoadInputFile` (`UBYTE *filename`, `int type`)
- `UBYTE` `ReadFromStream` (`STREAM *stream`)
- `UBYTE` `GetFromStream` (`STREAM *stream`)
- `UBYTE` `LookInStream` (`STREAM *stream`)
- `STREAM *` `OpenStream` (`UBYTE *name`, `int type`, `int prevarmode`, `int raiselow`)

- int [LocateFile](#) (UBYTE **name, int type)
- [STREAM](#) * [CloseStream](#) ([STREAM](#) *stream)
- [STREAM](#) * [CreateStream](#) (UBYTE *where)
- LONG [GetStreamPosition](#) ([STREAM](#) *stream)
- void [PositionStream](#) ([STREAM](#) *stream, LONG position)
- int [ReverseStatements](#) ([STREAM](#) *stream)
- void [StartFiles](#) (void)
- int [OpenFile](#) (char *name)
- int [OpenAddFile](#) (char *name)
- int [ReOpenFile](#) (char *name)
- int [CreateFile](#) (char *name)
- int [CreateLogFile](#) (char *name)
- void [CloseFile](#) (int handle)
- int [CopyFile](#) (char *source, char *dest)
- int [CreateHandle](#) (void)
- LONG [ReadFile](#) (int handle, UBYTE *buffer, LONG size)
- LONG [ReadPosFile](#) (PHEAD [FILEHANDLE](#) *fi, UBYTE *buffer, LONG size, [POSITION](#) *pos)
- LONG [WriteFileToFile](#) (int handle, UBYTE *buffer, LONG size)
- void [SeekFile](#) (int handle, [POSITION](#) *offset, int origin)
- LONG [TellFile](#) (int handle)
- void [TELLFILE](#) (int handle, [POSITION](#) *position)
- void [FlushFile](#) (int handle)
- int [GetPosFile](#) (int handle, fpos_t *pospointer)
- int [SetPosFile](#) (int handle, fpos_t *pospointer)
- void [SynchFile](#) (int handle)
- void [TruncateFile](#) (int handle)
- int [GetChannel](#) (char *name, int mode)
- int [GetAppendChannel](#) (char *name)
- int [CloseChannel](#) (char *name)
- void [UpdateMaxSize](#) (void)
- int [StrCmp](#) (UBYTE *s1, UBYTE *s2)
- int [StrlCmp](#) (UBYTE *s1, UBYTE *s2)
- int [StrHlCmp](#) (UBYTE *s1, UBYTE *s2)
- int [StrlCont](#) (UBYTE *s1, UBYTE *s2)
- int [CmpArray](#) (WORD *t1, WORD *t2, WORD n)
- int [ConWord](#) (UBYTE *s1, UBYTE *s2)
- int [StrLen](#) (UBYTE *s)
- void [NumToStr](#) (UBYTE *s, LONG x)
- void [WriteString](#) (int type, UBYTE *str, int num)
- void [WriteUnfinString](#) (int type, UBYTE *str, int num)
- UBYTE * [AddToString](#) (UBYTE *outstring, UBYTE *extrastring, int par)
- UBYTE * [strDup1](#) (UBYTE *instring, char *ifwrong)
- UBYTE * [EndOfToken](#) (UBYTE *s)
- UBYTE * [ToToken](#) (UBYTE *s)
- UBYTE * [SkipField](#) (UBYTE *s, int level)
- WORD [ReadSnum](#) (UBYTE **p)
- UBYTE * [NumCopy](#) (WORD y, UBYTE *to)
- char * [LongCopy](#) (LONG y, char *to)
- char * [LongLongCopy](#) (off_t *y, char *to)
- UBYTE * [MakeDate](#) (void)
- int [set_in](#) (UBYTE ch, [set_of_char](#) set)
- [one_byte](#) [set_set](#) (UBYTE ch, [set_of_char](#) set)
- [one_byte](#) [set_del](#) (UBYTE ch, [set_of_char](#) set)
- [one_byte](#) [set_sub](#) ([set_of_char](#) set, [set_of_char](#) set1, [set_of_char](#) set2)
- void [iniTools](#) (void)

- void * [Malloc1](#) (LONG size, const char *messageifwrong)
- void [M_free](#) (void *x, const char *where)
- void [M_check1](#) (void)
- void [M_print](#) (void)
- void [TermMallocAddMemory](#) (PHEAD0)
- void [NumberMallocAddMemory](#) (PHEAD0)
- void [CacheNumberMallocAddMemory](#) (PHEAD0)
- void * [FromList](#) (LIST *L)
- void * [From0List](#) (LIST *L)
- void * [FromVarList](#) (LIST *L)
- int [DoubleList](#) (void ***lijst, int *oldsize, int objectsize, char *nameoftype)
- int [DoubleLList](#) (void ***lijst, LONG *oldsize, int objectsize, char *nameoftype)
- void [DoubleBuffer](#) (void **start, void **stop, int size, char *text)
- void [ExpandBuffer](#) (void **buffer, LONG *oldsize, int type)
- LONG [iexp](#) (LONG x, int p)
- void [ToGeneral](#) (WORD *r, WORD *m, WORD par)
- int [ToFast](#) (WORD *r, WORD *m)
- WORD [ToPolyFunGeneral](#) (PHEAD WORD *term)
- int [IsLikeVector](#) (WORD *arg)
- int [AreArgsEqual](#) (WORD *arg1, WORD *arg2)
- int [CompareArgs](#) (WORD *arg1, WORD *arg2)
- int [CompArg](#) (WORD *s1, WORD *s2)
- LONG [TimeWallClock](#) (WORD par)
- LONG [TimeChildren](#) (WORD par)
- LONG [TimeCPU](#) (WORD par)
- int [Crash](#) (void)
- int [TestTerm](#) (WORD *term)
- int [DistrN](#) (int n, int *cpl, int ncpl, int *scratch)

Variables

- FILES ** [filelist](#)
- int [numinfilelist](#) = 0
- int [filelistsize](#) = 0
- WRITEFILE [WriteFile](#) = &WriteFileToFile

4.149.1 Detailed Description

Low level routines for many types of task. There are routines for manipulating the input system (streams and files) routines for string manipulation, the memory allocation interface, and the clock. The last is the most sensitive to ports. In the past nearly every port to another OS or computer gave trouble. Nowadays it is slightly better but the poor POSIX compliance of LINUX again gave problems for the multithreaded version.

Definition in file [tools.c](#).

4.149.2 Macro Definition Documentation

4.149.2.1 FILLVALUE

```
#define FILLVALUE 0
```

Definition at line 49 of file [tools.c](#).

4.149.2.2 TERMMEMSTARTNUM

```
#define TERMMEMSTARTNUM 16
```

Provides memory for one term (or one small polynomial) This means that the memory is limited to a buffer of size AM.MaxTer plus a few extra words. In parallel versions, each worker has its own memory pool.

The way we use the memory is by: term = TermMalloc(BHEAD0); and later we free it by TermFree(BHEAD term);

Layout: We have a list of available pointers to buffers: AT.TermMemHeap Its size is AT.TermMemMax We take from the top (indicated by AT.TermMemTop). When we run out of buffers we assign new ones (doubling the amount) and we have to extend the AT.TermMemHeap array. Important: There is no checking that the returned memory is legal, ie is memory that was handed out earlier.

Definition at line 2464 of file [tools.c](#).

4.149.2.3 TERMEXTRAWORDS

```
#define TERMEXTRAWORDS 10
```

Definition at line 2465 of file [tools.c](#).

4.149.2.4 NUMBERMEMSTARTNUM

```
#define NUMBERMEMSTARTNUM 16
```

Provides memory for one Long number This means that the memory is limited to a buffer of size AM.MaxTal In parallel versions, each worker has its own memory pool.

The way we use the memory is by: num = NumberMalloc(BHEAD0); Number = AT.NumberMemHeap[num]; and later we free it by NumberFree(BHEAD num);

Layout: We have a list of available pointers to buffers: AT.NumberMemHeap Its size is AT.NumberMemMax We take from the top (indicated by AT.NumberMemTop). When we run out of buffers we assign new ones (doubling the amount) and we have to extend the AT.NumberMemHeap array. Important: There is no checking on the returned memory!!!!

Definition at line 2564 of file [tools.c](#).

4.149.2.5 NUMBEREXTRAWORDS

```
#define NUMBEREXTRAWORDS 10L
```

Definition at line 2565 of file [tools.c](#).

4.149.2.6 DODOUBLE

```
#define DODOUBLE(
    x )
```

Value:

```
{ x *s, *t, *u; if ( *start ) { \
    oldsize = *(x **)stop - *(x **)start; newsize = 2*oldsize; \
    t = u = (x *)Malloca1(newsize*sizeof(x),text); s = *(x **)start; \
    for ( i = 0; i < oldsize; i++ ) { *t++ = *s++; } M_free(*start,"double"); } \
    else { newsize = 100; u = (x *)Malloca1(newsize*sizeof(x),text); } \
    *start = (void *)u; *stop = (void *) (u+newsize); }
```

Definition at line 2887 of file [tools.c](#).

4.149.2.7 DOEXPAND

```
#define DOEXPAND(
    x )
```

Value:

```
{ x *newbuffer, *t, *m;
  t = newbuffer = (x *)Malloc1((newsize+2)*type, "ExpandBuffer");
  if ( *buffer ) { m = (x *)*buffer; i = *oldsize;
    while ( --i >= 0 ) {t++ = *m++;} M_free(*buffer, "ExpandBuffer");
  } *buffer = newbuffer; *oldsize = newsize; }
```

Definition at line 2913 of file [tools.c](#).

4.149.3 Function Documentation

4.149.3.1 LoadInputFile()

```
UBYTE * LoadInputFile (
    UBYTE * filename,
    int type )
```

Definition at line 112 of file [tools.c](#).

4.149.3.2 ReadFromStream()

```
UBYTE ReadFromStream (
    STREAM * stream )
```

Definition at line 151 of file [tools.c](#).

4.149.3.3 GetFromStream()

```
UBYTE GetFromStream (
    STREAM * stream )
```

Definition at line 286 of file [tools.c](#).

4.149.3.4 LookInStream()

```
UBYTE LookInStream (
    STREAM * stream )
```

Definition at line 309 of file [tools.c](#).

4.149.3.5 OpenStream()

```
STREAM * OpenStream (
    UBYTE * name,
    int type,
    int prevarmode,
    int raiselow )
```

Definition at line 321 of file [tools.c](#).

4.149.3.6 LocateFile()

```
int LocateFile (
    UBYTE ** name,
    int type )
```

Definition at line 576 of file [tools.c](#).

4.149.3.7 CloseStream()

```
STREAM * CloseStream (
    STREAM * stream )
```

Definition at line 663 of file [tools.c](#).

4.149.3.8 CreateStream()

```
STREAM * CreateStream (
    UBYTE * where )
```

Definition at line 784 of file [tools.c](#).

4.149.3.9 GetStreamPosition()

```
LONG GetStreamPosition (
    STREAM * stream )
```

Definition at line 815 of file [tools.c](#).

4.149.3.10 PositionStream()

```
void PositionStream (
    STREAM * stream,
    LONG position )
```

Definition at line 825 of file [tools.c](#).

4.149.3.11 ReverseStatements()

```
int ReverseStatements (
    STREAM * stream )
```

Definition at line 857 of file [tools.c](#).

4.149.3.12 StartFiles()

```
void StartFiles (
    void )
```

Definition at line 958 of file [tools.c](#).

4.149.3.13 OpenFile()

```
int OpenFile (
    char * name )
```

Definition at line 985 of file [tools.c](#).

4.149.3.14 OpenAddFile()

```
int OpenAddFile (
    char * name )
```

Definition at line 1004 of file [tools.c](#).

4.149.3.15 ReOpenFile()

```
int ReOpenFile (
    char * name )
```

Definition at line 1025 of file [tools.c](#).

4.149.3.16 CreateFile()

```
int CreateFile (
    char * name )
```

Definition at line 1045 of file [tools.c](#).

4.149.3.17 CreateLogFile()

```
int CreateLogFile (
    char * name )
```

Definition at line 1062 of file [tools.c](#).

4.149.3.18 CloseFile()

```
void CloseFile (
    int handle )
```

Definition at line 1080 of file [tools.c](#).

4.149.3.19 CopyFile()

```
int CopyFile (
    char * source,
    char * dest )
```

Copies a file with name **source* to a file named **dest*. The involved files must not be open. Returns non-zero if an error occurred. Uses if possible the combined large and small sorting buffers as cache.

Definition at line 1103 of file [tools.c](#).

Referenced by [DoRecovery\(\)](#).

4.149.3.20 CreateHandle()

```
int CreateHandle (
    void )
```

Definition at line 1164 of file [tools.c](#).

4.149.3.21 ReadFile()

```
LONG ReadFile (
    int handle,
    UBYTE * buffer,
    LONG size )
```

Definition at line 1219 of file [tools.c](#).

4.149.3.22 ReadPosFile()

```
LONG ReadPosFile (
    PHEAD FILEHANDLE * fi,
    UBYTE * buffer,
    LONG size,
    POSITION * pos )
```

Definition at line 1269 of file [tools.c](#).

4.149.3.23 WriteFileToFile()

```
LONG WriteFileToFile (
    int handle,
    UBYTE * buffer,
    LONG size )
```

Definition at line 1335 of file [tools.c](#).

4.149.3.24 SeekFile()

```
void SeekFile (
    int handle,
    POSITION * offset,
    int origin )
```

Definition at line 1373 of file [tools.c](#).

4.149.3.25 TellFile()

```
LONG TellFile (
    int handle )
```

Definition at line 1398 of file [tools.c](#).

4.149.3.26 TELLFILE()

```
void TELLFILE (
    int handle,
    POSITION * position )
```

Definition at line 1408 of file [tools.c](#).

4.149.3.27 FlushFile()

```
void FlushFile (
    int handle )
```

Definition at line 1422 of file [tools.c](#).

4.149.3.28 GetPosFile()

```
int GetPosFile (
    int handle,
    fpos_t * pospointer )
```

Definition at line 1436 of file [tools.c](#).

4.149.3.29 SetPosFile()

```
int SetPosFile (
    int handle,
    fpos_t * pospointer )
```

Definition at line 1450 of file [tools.c](#).

4.149.3.30 SynchFile()

```
void SynchFile (  
    int handle )
```

Definition at line [1470](#) of file [tools.c](#).

4.149.3.31 TruncateFile()

```
void TruncateFile (  
    int handle )
```

Definition at line [1492](#) of file [tools.c](#).

4.149.3.32 GetChannel()

```
int GetChannel (  
    char * name,  
    int mode )
```

Definition at line [1512](#) of file [tools.c](#).

4.149.3.33 GetAppendChannel()

```
int GetAppendChannel (  
    char * name )
```

Definition at line [1548](#) of file [tools.c](#).

4.149.3.34 CloseChannel()

```
int CloseChannel (  
    char * name )
```

Definition at line [1578](#) of file [tools.c](#).

4.149.3.35 UpdateMaxSize()

```
void UpdateMaxSize (  
    void )
```

Definition at line [1612](#) of file [tools.c](#).

4.149.3.36 StrCmp()

```
int StrCmp (  
    UBYTE * s1,  
    UBYTE * s2 )
```

Definition at line [1702](#) of file [tools.c](#).

4.149.3.37 StrICmp()

```
int StrICmp (
    UBYTE * s1,
    UBYTE * s2 )
```

Definition at line 1713 of file [tools.c](#).

4.149.3.38 StrHICmp()

```
int StrHICmp (
    UBYTE * s1,
    UBYTE * s2 )
```

Definition at line 1724 of file [tools.c](#).

4.149.3.39 StrICont()

```
int StrICont (
    UBYTE * s1,
    UBYTE * s2 )
```

Definition at line 1735 of file [tools.c](#).

4.149.3.40 CmpArray()

```
int CmpArray (
    WORD * t1,
    WORD * t2,
    WORD n )
```

Definition at line 1747 of file [tools.c](#).

4.149.3.41 ConWord()

```
int ConWord (
    UBYTE * s1,
    UBYTE * s2 )
```

Definition at line 1761 of file [tools.c](#).

4.149.3.42 StrLen()

```
int StrLen (
    UBYTE * s )
```

Definition at line 1773 of file [tools.c](#).

4.149.3.43 NumToStr()

```
void NumToStr (
    UBYTE * s,
    LONG x )
```

Definition at line 1785 of file [tools.c](#).

4.149.3.44 WriteString()

```
void WriteString (
    int type,
    UBYTE * str,
    int num )
```

Definition at line 1809 of file [tools.c](#).

4.149.3.45 WriteUnfinString()

```
void WriteUnfinString (
    int type,
    UBYTE * str,
    int num )
```

Definition at line 1843 of file [tools.c](#).

4.149.3.46 AddToString()

```
UBYTE * AddToString (
    UBYTE * outstring,
    UBYTE * extrastring,
    int par )
```

Definition at line 1868 of file [tools.c](#).

4.149.3.47 strDup1()

```
UBYTE * strDup1 (
    UBYTE * instring,
    char * ifwrong )
```

Definition at line 1906 of file [tools.c](#).

4.149.3.48 EndOfToken()

```
UBYTE * EndOfToken (
    UBYTE * s )
```

Definition at line 1921 of file [tools.c](#).

4.149.3.49 ToToken()

```
UBYTE * ToToken (
    UBYTE * s )
```

Definition at line 1933 of file [tools.c](#).

4.149.3.50 SkipField()

```
UBYTE * SkipField (
    UBYTE * s,
    int level )
```

Definition at line 1948 of file [tools.c](#).

4.149.3.51 ReadSnum()

```
WORD ReadSnum (
    UBYTE ** p )
```

Definition at line 1975 of file [tools.c](#).

4.149.3.52 NumCopy()

```
UBYTE * NumCopy (
    WORD y,
    UBYTE * to )
```

Definition at line 1999 of file [tools.c](#).

4.149.3.53 LongCopy()

```
char * LongCopy (
    LONG y,
    char * to )
```

Definition at line 2026 of file [tools.c](#).

4.149.3.54 LongLongCopy()

```
char * LongLongCopy (
    off_t * y,
    char * to )
```

Definition at line 2053 of file [tools.c](#).

4.149.3.55 MakeDate()

```
UBYTE * MakeDate (
    void )
```

Definition at line [2092](#) of file [tools.c](#).

4.149.3.56 set_in()

```
int set_in (
    UBYTE ch,
    set_of_char set )
```

Definition at line [2114](#) of file [tools.c](#).

4.149.3.57 set_set()

```
one_byte set_set (
    UBYTE ch,
    set_of_char set )
```

Definition at line [2134](#) of file [tools.c](#).

4.149.3.58 set_del()

```
one_byte set_del (
    UBYTE ch,
    set_of_char set )
```

Definition at line [2155](#) of file [tools.c](#).

4.149.3.59 set_sub()

```
one_byte set_sub (
    set_of_char set,
    set_of_char set1,
    set_of_char set2 )
```

Definition at line [2177](#) of file [tools.c](#).

4.149.3.60 iniTools()

```
void iniTools (
    void )
```

Definition at line [2203](#) of file [tools.c](#).

4.149.3.61 Malloc1()

```
void * Malloc1 (
    LONG size,
    const char * messageifwrong )
```

Definition at line 2224 of file [tools.c](#).

4.149.3.62 M_free()

```
void M_free (
    void * x,
    const char * where )
```

Definition at line 2300 of file [tools.c](#).

4.149.3.63 M_check1()

```
void M_check1 (
    void )
```

Definition at line 2433 of file [tools.c](#).

4.149.3.64 M_print()

```
void M_print (
    void )
```

Definition at line 2434 of file [tools.c](#).

4.149.3.65 TermMallocAddMemory()

```
void TermMallocAddMemory (
    PHEAD0 )
```

Definition at line 2467 of file [tools.c](#).

4.149.3.66 NumberMallocAddMemory()

```
void NumberMallocAddMemory (
    PHEAD0 )
```

Definition at line 2571 of file [tools.c](#).

4.149.3.67 CacheNumberMallocAddMemory()

```
void CacheNumberMallocAddMemory (
    PHEAD0 )
```

Definition at line 2645 of file [tools.c](#).

4.149.3.68 FromList()

```
void * FromList (
    LIST * L )
```

Definition at line 2697 of file [tools.c](#).

4.149.3.69 From0List()

```
void * From0List (
    LIST * L )
```

Definition at line 2723 of file [tools.c](#).

4.149.3.70 FromVarList()

```
void * FromVarList (
    LIST * L )
```

Definition at line 2752 of file [tools.c](#).

4.149.3.71 DoubleList()

```
int DoubleList (
    void *** lijst,
    int * oldsize,
    int objectsize,
    char * nameoftype )
```

Definition at line 2794 of file [tools.c](#).

4.149.3.72 DoubleLList()

```
int DoubleLList (
    void *** lijst,
    LONG * oldsize,
    int objectsize,
    char * nameoftype )
```

Definition at line 2846 of file [tools.c](#).

4.149.3.73 DoubleBuffer()

```
void DoubleBuffer (
    void ** start,
    void ** stop,
    int size,
    char * text )
```

Definition at line 2894 of file [tools.c](#).

4.149.3.74 ExpandBuffer()

```
void ExpandBuffer (
    void ** buffer,
    LONG * oldsize,
    int type )
```

Definition at line [2919](#) of file [tools.c](#).

4.149.3.75 iexp()

```
LONG iexp (
    LONG x,
    int p )
```

Definition at line [2943](#) of file [tools.c](#).

4.149.3.76 ToGeneral()

```
void ToGeneral (
    WORD * r,
    WORD * m,
    WORD par )
```

Definition at line [2974](#) of file [tools.c](#).

4.149.3.77 ToFast()

```
int ToFast (
    WORD * r,
    WORD * m )
```

Definition at line [3018](#) of file [tools.c](#).

4.149.3.78 ToPolyFunGeneral()

```
WORD ToPolyFunGeneral (
    PHEAD WORD * term )
```

Definition at line [3071](#) of file [tools.c](#).

4.149.3.79 IsLikeVector()

```
int IsLikeVector (
    WORD * arg )
```

Definition at line [3146](#) of file [tools.c](#).

4.149.3.80 AreArgsEqual()

```
int AreArgsEqual (
    WORD * arg1,
    WORD * arg2 )
```

Definition at line 3174 of file [tools.c](#).

4.149.3.81 CompareArgs()

```
int CompareArgs (
    WORD * arg1,
    WORD * arg2 )
```

Definition at line 3193 of file [tools.c](#).

4.149.3.82 CompArg()

```
int CompArg (
    WORD * s1,
    WORD * s2 )
```

Definition at line 3224 of file [tools.c](#).

4.149.3.83 TimeWallClock()

```
LONG TimeWallClock (
    WORD par )
```

Returns the wall-clock time.

Parameters

<i>par</i>	If zero, the wall-clock time will be reset to 0.
------------	--

Returns

The wall-clock time in centiseconds.

Definition at line 3394 of file [tools.c](#).

Referenced by [DoCheckpoint\(\)](#), [DoRecovery\(\)](#), [find_Horner_MCTS\(\)](#), [optimize_expression_given_Horner\(\)](#), [optimize_greedy\(\)](#), and [WriteStats\(\)](#).

4.149.3.84 TimeChildren()

```
LONG TimeChildren (
    WORD par )
```

Definition at line 3450 of file [tools.c](#).

4.149.3.85 TimeCPU()

```
LONG TimeCPU (
    WORD par )
```

Returns the CPU time.

Parameters

<i>par</i>	If zero, the CPU time will be reset to 0.
------------	---

Returns

The CPU time in milliseconds.

Definition at line [3468](#) of file [tools.c](#).

Referenced by [PF_GetSlaveTimes\(\)](#), [PF_Processor\(\)](#), and [WriteStats\(\)](#).

4.149.3.86 Crash()

```
int Crash (
    void )
```

Definition at line [3751](#) of file [tools.c](#).

4.149.3.87 TestTerm()

```
int TestTerm (
    WORD * term )
```

Tests the consistency of the term. Returns 0 when the term is OK. Any nonzero value is trouble. In the current version the testing isn't 100% complete. For instance, we don't check the validity of the symbols nor do we check the range of their powers. Etc. This should be extended when the need is there.

Parameters


<i>term</i>	the term to be tested
-------------	-----------------------

Definition at line [3779](#) of file [tools.c](#).

References [TestTerm\(\)](#).

Referenced by [TestTerm\(\)](#).

Here is the call graph for this function:



4.149.3.88 DistrN()

```
int DistrN (
    int n,
    int * cpl,
    int ncpl,
    int * scratch )
```

Definition at line [3965](#) of file [tools.c](#).

4.149.4 Variable Documentation

4.149.4.1 filelist

```
FILES** filelist
```

Definition at line [65](#) of file [tools.c](#).

4.149.4.2 numinfilelist

```
int numinfilelist = 0
```

Definition at line [66](#) of file [tools.c](#).

4.149.4.3 filelistsize

```
int filelistsize = 0
```

Definition at line [67](#) of file [tools.c](#).

4.149.4.4 WriteFile

```
WRITEFILE WriteFile = &WriteFileToFile
```

Definition at line [1359](#) of file [tools.c](#).

4.150 tools.c

[Go to the documentation of this file.](#)

```

00001
00011 /* #[ License : */
00012 /*
00013 *   Copyright (C) 1984-2026 J.A.M. Vermaseren
00014 *   When using this file you are requested to refer to the publication
00015 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00016 *   This is considered a matter of courtesy as the development was paid
00017 *   for by FOM the Dutch physics granting agency and we would like to
00018 *   be able to track its scientific use to convince FOM of its value
00019 *   for the community.
00020 *
00021 *   This file is part of FORM.
00022 *
00023 *   FORM is free software: you can redistribute it and/or modify it under the
00024 *   terms of the GNU General Public License as published by the Free Software
00025 *   Foundation, either version 3 of the License, or (at your option) any later
00026 *   version.
00027 *
00028 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00029 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00030 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00031 *   details.
00032 *
00033 *   You should have received a copy of the GNU General Public License along
00034 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00035 */
00036 /* #] License : */
00037 /*
00038 *   #[ Includes :
00039 *   Note: TERMMALLOCDEBUG tests part of the TermMalloc and NumberMalloc
00040 *   system. To work properly it needs MEMORYMACROS in declare.h
00041 *   not to be defined to make sure that all calls will be diverted
00042 *   to the routines here.
00043 #define TERMMALLOCDEBUG
00044 #define FILLVALUE 126
00045 #define MALLOCDEBUGOUTPUT
00046 #define MALLOCDEBUG 1
00047 */
00048 #ifndef FILLVALUE
00049     #define FILLVALUE 0
00050 #endif
00051
00052 /*
00053 *   The enhanced malloc debugger, see comments in the beginning of the
00054 *   file mallocprotect.h
00055 *   MALLOCPROTECT == -1 -- protect left side, used block is left-aligned.
00056 *   MALLOCPROTECT == 0 -- protect both sides, used block is left-aligned;
00057 *   MALLOCPROTECT == 1 -- protect both sides, used block is right-aligned;
00058 *   ATTENTION! The macro MALLOCPROTECT must be defined
00059 *   BEFORE #include mallocprotect.h
00060 #define MALLOCPROTECT 1
00061 */
00062
00063 #include "form3.h"
00064
00065 FILES **filelist;
00066 int numinfilelist = 0;
00067 int filelistsize = 0;
00068 #ifdef MALLOCDEBUG
00069 #define BANNER (4*sizeof(LONG))
00070 void *malloclist[60000];
00071 LONG mallocsizes[60000];
00072 char *mallocstrings[60000];
00073 int nummalloclist = 0;
00074 #endif
00075
00076 #ifdef GPP
00077 extern "C" getdtablesize();
00078 #endif
00079
00080 #ifdef WITHSTATS
00081 LONG numwrites = 0;
00082 LONG numreads = 0;
00083 LONG numseeks = 0;
00084 LONG nummallocs = 0;
00085 LONG numfrees = 0;
00086 #endif
00087
00088 #ifdef MALLOCPROTECT
00089 #ifdef TRAP_SIGNALS
00090 #error "MALLOCPROTECT":  undefine "TRAP_SIGNALS" in unix.h first!
00091 #endif

```

```

00092 #include "mallocprotect.h"
00093
00094 #ifdef M_alloc
00095 #undef M_alloc
00096 #endif
00097
00098 #define M_alloc mprotectMalloc
00099
00100 #endif
00101
00102 #ifdef TERMMALLOCDEBUG
00103 WORD **DebugHeap1, **DebugHeap2;
00104 #endif
00105
00106 /*
00107     #] Includes :
00108     #[ Streams :
00109         #[ LoadInputFile :
00110 */
00111
00112 UBYTE *LoadInputFile(UBYTE *filename, int type)
00113 {
00114     int handle;
00115     LONG filesize;
00116     UBYTE *buffer, *name = filename;
00117     POSITION scrpos;
00118     handle = LocateFile(&name,type);
00119     if ( handle < 0 ) return(0);
00120     PUTZERO(scrpos);
00121     SeekFile(handle,&scrpos,SEEK_END);
00122     TELLFILE(handle,&scrpos);
00123     filesize = BASEPOSITION(scrpos);
00124     PUTZERO(scrpos);
00125     SeekFile(handle,&scrpos,SEEK_SET);
00126     buffer = (UBYTE *)Malloca1(filesize+2,"LoadInputFile");
00127     if ( ReadFile(handle,buffer,filesize) != filesize ) {
00128         Error1("Read error for file ",name);
00129         M_free(buffer,"LoadInputFile");
00130         if ( name != filename ) M_free(name,"FromLoadInputFile");
00131         CloseFile(handle);
00132         return(0);
00133     }
00134     CloseFile(handle);
00135     if ( type == PROCEDUREFILE || type == SETUPFILE ) {
00136         buffer[filesize] = '\n';
00137         buffer[filesize+1] = 0;
00138     }
00139     else {
00140         buffer[filesize] = 0;
00141     }
00142     if ( name != filename ) M_free(name,"FromLoadInputFile");
00143     return(buffer);
00144 }
00145
00146 /*
00147     #] LoadInputFile :
00148     #[ ReadFromStream :
00149 */
00150
00151 UBYTE ReadFromStream(STREAM *stream)
00152 {
00153     UBYTE c;
00154     POSITION scrpos;
00155     #ifdef WITHPIPE
00156     if ( stream->type == PIPESTREAM ) {
00157     #ifndef WITHMPI
00158         FILE *f;
00159         int cc;
00160         RWLOCKR(AM.handlelock);
00161         f = (FILE *) (filelist[stream->handle]);
00162         UNRWLOCK(AM.handlelock);
00163         cc = getc(f);
00164         if ( cc == EOF ) return(ENDOFSTREAM);
00165         c = (UBYTE)cc;
00166     #else
00167         if ( stream->pointer >= stream->top ) {
00168             /* The master reads the pipe and broadcasts it to the slaves. */
00169             LONG len;
00170             if ( PF.me == MASTER ) {
00171                 FILE *f;
00172                 UBYTE *p, *end;
00173                 RWLOCKR(AM.handlelock);
00174                 f = (FILE *) filelist[stream->handle];
00175                 UNRWLOCK(AM.handlelock);
00176                 p = stream->buffer;
00177                 end = stream->buffer + stream->buffersize;
00178                 while ( p < end ) {

```

```

00179         int cc = getc(f);
00180         if ( cc == EOF ) {
00181             break;
00182         }
00183         *p++ = (UBYTE)cc;
00184     }
00185     len = p - stream->buffer;
00186     PF_BroadcastNumber(len);
00187 }
00188 else {
00189     len = PF_BroadcastNumber(0);
00190 }
00191 if ( len > 0 ) {
00192     PF_Bcast(stream->buffer, len);
00193 }
00194 stream->pointer = stream->buffer;
00195 stream->inbuffer = len;
00196 stream->top = stream->buffer + stream->inbuffer;
00197 if ( stream->pointer == stream->top ) return ENDOFSTREAM;
00198 }
00199 c = (UBYTE)*stream->pointer++;
00200 #endif
00201 if ( stream->eqnum == 1 ) { stream->eqnum = 0; stream->linenumber++; }
00202 if ( c == LINEFEED ) stream->eqnum = 1;
00203 return(c);
00204 }
00205 #endif
00206 /*[14apr2004 mt]:*/
00207 #ifdef WITHEXTERNALCHANNEL
00208     if ( stream->type == EXTERNALCHANNELSTREAM ) {
00209         int cc;
00210         cc = getcFromExtChannel();
00211         /*[18may20006 mt]:*/
00212         /*if ( cc == EOF ) return(ENDOFSTREAM);*/
00213         if ( cc < 0 ) {
00214             if( cc == EOF )
00215                 return(ENDOFSTREAM);
00216             else{
00217                 Error0("No current external channel");
00218                 Terminate(-1);
00219             }
00220         }/*if ( cc < 0 )*/
00221         /*:[18may20006 mt]:*/
00222         c = (UBYTE)cc;
00223         if ( stream->eqnum == 1 ) { stream->eqnum = 0; stream->linenumber++; }
00224         if ( c == LINEFEED ) stream->eqnum = 1;
00225         return(c);
00226     }
00227 #endif /*ifdef WITHEXTERNALCHANNEL*/
00228 /*:[14apr2004 mt]:*/
00229     if ( stream->type == INPUTSTREAM ) {
00230         if ( stream->pointer < stream->top ) {
00231             c = *stream->pointer++;
00232         }
00233         else {
00234             if ( ReadFile(stream->handle,&c,1) != 1 ) {
00235                 return(ENDOFSTREAM);
00236             }
00237             if ( stream->fileposition == 0 ) {
00238                 if ( !stream->buffer ) {
00239                     stream->buffer = (UBYTE *)Malloc1(stream->buffer, "input stream buffer");
00240                     stream->pointer = stream->top = stream->buffer;
00241                 }
00242             }
00243             else {
00244                 if ( stream->top - stream->buffer >= stream->buffer ) {
00245                     LONG oldsize = stream->buffer;
00246                     DoubleBuffer((void**)&stream->buffer, (void**)&stream->top, sizeof(UBYTE), "double input stream buffer");
00247                     stream->buffer = stream->buffer;
00248                     stream->pointer = stream->top = stream->buffer + oldsize;
00249                 }
00250             }
00251             *stream->pointer = c;
00252             stream->pointer = ++stream->top;
00253             stream->inbuffer++;
00254         }
00255     }
00256     if ( stream->eqnum == 1 ) { stream->eqnum = 0; stream->linenumber++; }
00257     if ( c == LINEFEED ) stream->eqnum = 1;
00258     return(c);
00259 }
00260 if ( stream->pointer >= stream->top ) {
00261     if ( stream->type != FILESTREAM ) return(ENDOFSTREAM);
00262     if ( stream->fileposition != stream->bufferposition+stream->inbuffer ) {
00263         stream->fileposition = stream->bufferposition+stream->inbuffer;
00264         SETBASEPOSITION(scrpos, stream->fileposition);

```

```

00265         SeekFile(stream->handle, &scrpos, SEEK_SET);
00266     }
00267     stream->bufferposition = stream->fileposition;
00268     stream->inbuffer = ReadFile(stream->handle,
00269         stream->buffer, stream->buffersize);
00270     if ( stream->inbuffer <= 0 ) return(EOFSTREAM);
00271     stream->top = stream->buffer + stream->inbuffer;
00272     stream->pointer = stream->buffer;
00273     stream->fileposition = stream->bufferposition + stream->inbuffer;
00274 }
00275 if ( stream->eqnum == 1 ) { stream->eqnum = 0; stream->linenumber++; }
00276 c = *(stream->pointer)++;
00277 if ( c == LINEFEED ) stream->eqnum = 1;
00278 return(c);
00279 }
00280
00281 /*
00282     #] ReadFromStream :
00283     #[ GetFromStream :
00284 */
00285
00286 UBYTE GetFromStream(STREAM *stream)
00287 {
00288     UBYTE c1, c2;
00289     if ( stream->isnextchar > 0 ) {
00290         return(stream->nextchar[--stream->isnextchar]);
00291     }
00292     c1 = ReadFromStream(stream);
00293     if ( c1 == LINEFEED || c1 == CARRIAGERETURN ) {
00294         c2 = ReadFromStream(stream);
00295         if ( c2 == c1 || ( c2 != LINEFEED && c2 != CARRIAGERETURN ) ) {
00296             stream->isnextchar = 1;
00297             stream->nextchar[0] = c2;
00298         }
00299         return(LINEFEED);
00300     }
00301     else return(c1);
00302 }
00303
00304 /*
00305     #] GetFromStream :
00306     #[ LookInStream :
00307 */
00308
00309 UBYTE LookInStream(STREAM *stream)
00310 {
00311     UBYTE c = GetFromStream(stream);
00312     UngetFromStream(stream, c);
00313     return(c);
00314 }
00315
00316 /*
00317     #] LookInStream :
00318     #[ OpenStream :
00319 */
00320
00321 STREAM *OpenStream(UBYTE *name, int type, int prevarmode, int raiselow)
00322 {
00323     STREAM *stream;
00324     UBYTE *rhsofvariable, *s, *newname, c;
00325     POSITION scrpos;
00326     int handle, num;
00327     LONG filesize;
00328     switch ( type ) {
00329         case REVERSEFILESTREAM:
00330         case FILESTREAM:
00331     }
00332     /*
00333         Notice that FILESTREAM is only used for text files:
00334         The #include files and the main input file (.frm)
00335         Hence we do not worry about files longer than 2 Gbytes.
00336     */
00337     newname = name;
00338     handle = LocateFile(&newname, -1);
00339     if ( handle < 0 ) return(0);
00340     PUTZERO(scrpos);
00341     SeekFile(handle, &scrpos, SEEK_END);
00342     TELLFILE(handle, &scrpos);
00343     filesize = BASEPOSITION(scrpos);
00344     PUTZERO(scrpos);
00345     SeekFile(handle, &scrpos, SEEK_SET);
00346     if ( filesize > AM.MaxStreamSize && type == FILESTREAM )
00347         filesize = AM.MaxStreamSize;
00348     stream = CreateStream((UBYTE *) "filestream");
00349     /*
00350         The extra +1 in the Malloc1 is potentially needed in ReverseStatements!
00351     */
00352     stream->buffer = (UBYTE *) Malloc1(filesize+1, "name of input stream");

```

```

00352     stream->inbuffer = ReadFile(handle,stream->buffer,filesize);
00353     if ( type == REVERSEFILESTREAM ) {
00354         if ( ReverseStatements(stream) ) {
00355             M_free(stream->buffer,"name of input stream");
00356             return(0);
00357         }
00358     }
00359     stream->top = stream->buffer + stream->inbuffer;
00360     stream->pointer = stream->buffer;
00361     stream->handle = handle;
00362     stream->bufferSize = fileSize;
00363     stream->fileposition = stream->inbuffer;
00364     if ( newname != name ) stream->name = newname;
00365     else if ( name ) stream->name = strdup(name,"name of input stream");
00366     else
00367         stream->name = 0;
00368     stream->prevline = stream->linenumber = 1;
00369     stream->eqnum = 0;
00370     break;
00371 case PREVARSTREAM:
00372     if ( ( rhsOfVariable = GetPreVar(name,WITHERROR) ) == 0 ) return(0);
00373     stream = CreateStream((UBYTE *)"var-stream");
00374     stream->buffer = stream->pointer = s = rhsOfVariable;
00375     while ( *s ) s++;
00376     stream->top = s;
00377     stream->inbuffer = s - stream->buffer;
00378     stream->name = AC.CurrentStream->name;
00379     stream->linenumber = AC.CurrentStream->linenumber;
00380     stream->prevline = AC.CurrentStream->prevline;
00381     stream->eqnum = AC.CurrentStream->eqnum;
00382     stream->pname = strdup(name,"stream->pname");
00383     stream->olddelay = AP.AllowDelay;
00384     s = stream->pname; while ( *s ) s++;
00385     while ( s[-1] == '+' || s[-1] == '-' ) s--;
00386     *s = 0;
00387     UnsetAllowDelay();
00388     break;
00389 case DOLLARSTREAM:
00390     if ( ( num = GetDollar(name) ) < 0 ) {
00391         WORD numfac = 0;
00392         /*
00393          Here we have to test first whether we have $x[1], $x[0]
00394          or just an undefined $x.
00395          */
00396         s = name; while ( *s && *s != '[' ) s++;
00397         if ( *s == 0 ) return(0);
00398         c = *s; *s = 0;
00399         if ( ( num = GetDollar(name) ) < 0 ) return(0);
00400         *s = c;
00401         s++;
00402         if ( *s == 0 || FG.cTable[*s] != 1 || *s == ']' ) {
00403             MesPrint("@Illegal factor number for dollar variable");
00404             return(0);
00405         }
00406         while ( *s && FG.cTable[*s] == 1 ) {
00407             numfac = 10*numfac+*s++-'0';
00408         }
00409         if ( *s != '[' || s[1] != 0 ) {
00410             MesPrint("@Illegal factor number for $ variable");
00411             return(0);
00412         }
00413         stream = CreateStream((UBYTE *)"dollar-stream");
00414         stream->buffer = stream->pointer = s = WriteDollarFactorToBuffer(num,numfac,1);
00415     }
00416     else {
00417         stream = CreateStream((UBYTE *)"dollar-stream");
00418         stream->buffer = stream->pointer = s = WriteDollarToBuffer(num,1);
00419     }
00420     while ( *s ) s++;
00421     stream->top = s;
00422     stream->inbuffer = s - stream->buffer;
00423     stream->name = AC.CurrentStream->name;
00424     stream->linenumber = AC.CurrentStream->linenumber;
00425     stream->prevline = AC.CurrentStream->prevline;
00426     stream->eqnum = AC.CurrentStream->eqnum;
00427     stream->pname = strdup(name,"stream->pname");
00428     s = stream->pname; while ( *s ) s++;
00429     while ( s[-1] == '+' || s[-1] == '-' ) s--;
00430     *s = 0;
00431     /* We 'stole' the buffer. Later we can free it. */
00432     AO.DollarOutSizeBuffer = 0;
00433     AO.DollarOutBuffer = 0;
00434     AO.DollarInOutBuffer = 0;
00435     break;
00436 case PREREADSTREAM:
00437 case PREREADSTREAM2:
00438 case PREREADSTREAM3:

```

```

00439         case PRECALCSTREAM:
00440             stream = CreateStream((UBYTE *)"calculator");
00441             stream->buffer = stream->pointer = s = name;
00442             while ( *s ) s++;
00443             stream->top = s;
00444             stream->inbuffer = s - stream->buffer;
00445             stream->name = AC.CurrentStream->name;
00446             stream->linenumber = AC.CurrentStream->linenumber;
00447             stream->prevline = AC.CurrentStream->prevline;
00448             stream->eqnum = 0;
00449             break;
00450 #ifndef WITHPIPE
00451         case PIPESTREAM:
00452             stream = CreateStream((UBYTE *)"pipe");
00453 #ifndef WITHMPI
00454             {
00455                 FILE *f;
00456                 if ( ( f = popen((char *)name,"r") ) == 0 ) {
00457                     Error0("@Cannot create pipe");
00458                 }
00459                 stream->handle = CreateHandle();
00460                 RWLOCKW(AM.handlelock);
00461                 filelist[stream->handle] = (FILES *)f;
00462                 UNRWLOCK(AM.handlelock);
00463             }
00464             stream->buffer = stream->top = 0;
00465             stream->inbuffer = 0;
00466 #else
00467             {
00468                 /* Only the master opens the pipe. */
00469                 FILE *f;
00470                 if ( PF.me == MASTER ) {
00471                     f = popen((char *)name, "r");
00472                     PF_BroadcastNumber(f == 0);
00473                     if ( f == 0 ) Error0("@Cannot create pipe");
00474                 }
00475                 else {
00476                     if ( PF_BroadcastNumber(0) ) Error0("@Cannot create pipe");
00477                     f = (FILE *)123; /* dummy */
00478                 }
00479                 stream->handle = CreateHandle();
00480                 RWLOCKW(AM.handlelock);
00481                 filelist[stream->handle] = (FILES *)f;
00482                 UNRWLOCK(AM.handlelock);
00483             }
00484             /* stream->buffer as a send/receive buffer. */
00485             stream->buffer = (UBYTE *)Malloc1(stream->buffer, "pipe buffer");
00486             stream->inbuffer = 0;
00487             stream->top = stream->buffer;
00488             stream->pointer = stream->buffer;
00489 #endif
00490             stream->name = strDup1((UBYTE *)"pipe","pipe");
00491             stream->prevline = stream->linenumber = 1;
00492             stream->eqnum = 0;
00493             break;
00494 #endif
00495 #endif
00496 /*[14apr2004 mt]:*/
00497 #ifndef WITHEXTERNALCHANNEL
00498         case EXTERNALCHANNELSTREAM:
00499             /*Block*/
00500             int n, *tmpn;
00501             if( (n=getCurrentExternalChannel()) == 0 )
00502                 Error0("@No current external channel");
00503             stream = CreateStream((UBYTE *)"externalchannel");
00504             stream->handle = CreateHandle();
00505             tmpn = (int *)Malloc1(sizeof(int),"external channel handle");
00506             *tmpn = n;
00507             RWLOCKW(AM.handlelock);
00508             filelist[stream->handle] = (FILES *)tmpn;
00509             UNRWLOCK(AM.handlelock);
00510             /*Block*/
00511             stream->buffer = stream->top = 0;
00512             stream->inbuffer = 0;
00513             stream->name = strDup1((UBYTE *)"externalchannel","externalchannel");
00514             stream->prevline = stream->linenumber = 1;
00515             stream->eqnum = 0;
00516             break;
00517 #endif /*ifdef WITHEXTERNALCHANNEL*/
00518 /*:[14apr2004 mt]:*/
00519         case INPUTSTREAM:
00520             /*
00521              * Assume that "name" stores a file descriptor (UNIX) or a FILE
00522              * pointer (Windows). We don't close it automatically on closing
00523              * the INPUTSTREAM stream (e.g., for stdin).
00524              */
00525             stream = CreateStream((UBYTE *)"input stream");

```



```

00526         stream->handle = CreateHandle();
00527     {
00528         FILES *f = (FILES *)Malloca(sizeof(int),"input stream handle");
00529         /* NOTE: in both cases name=0 indicates stdin. */
00530 #ifdef UNIX
00531         f->descriptor = (int)(ssize_t)name;
00532 #else
00533         f = name ? (FILES *)name : stdin;
00534 #endif
00535         RWLOCKW(AM.handlelock);
00536         filelist[stream->handle] = f;
00537         UNRWLOCK(AM.handlelock);
00538     }
00539     stream->buffer = stream->pointer = stream->top = 0;
00540     stream->inbuffer = 0;
00541     stream->name = strdup((UBYTE *) (name ? "INPUT" : "STDIN"),"input stream name");
00542     stream->prevline = stream->linenumber = 1;
00543     stream->eqnum = 0;
00544     /*
00545      * fileposition == -1: default
00546      * fileposition == 0: cache the input
00547      * See also: ReadFromStream, TryFileSetups
00548      */
00549     stream->fileposition = -1;
00550     break;
00551 default:
00552     return(0);
00553 }
00554 stream->bufferposition = 0;
00555 stream->isnextchar = 0;
00556 stream->type = type;
00557 stream->previousNoShowInput = AC.NoShowInput;
00558 stream->afterwards = raiselow;
00559 if ( AC.CurrentStream ) stream->previous = AC.CurrentStream - AC.Streams;
00560 else stream->previous = -1;
00561 stream->FoldName = 0;
00562 if ( prevarmode == 0 ) stream->prevvars = -1;
00563 else if ( prevarmode > 0 ) stream->prevvars = NumPre;
00564 else if ( prevarmode < 0 ) stream->prevvars = -prevarmode-1;
00565 AC.CurrentStream = stream;
00566 if ( type == PREREADSTREAM || type == PREREADSTREAM3 || type == PRECALCSTREAM
00567     || type == DOLLARSTREAM ) AC.NoShowInput = 1;
00568 return(stream);
00569 }
00570
00571 /*
00572     #] OpenStream :
00573     #[ LocateFile :
00574 */
00575
00576 int LocateFile(UBYTE **name, int type)
00577 {
00578     int handle, namesize, i;
00579     UBYTE *s, *to, *u1, *u2, *newname, *indir;
00580     handle = OpenFile((char *) (*name));
00581     if ( handle >= 0 ) return(handle);
00582     if ( type == SETUPFILE && AM.SetupFile ) {
00583         handle = OpenFile((char *) (AM.SetupFile));
00584         if ( handle >= 0 ) return(handle);
00585         MesPrint("Could not open setup file %s", (char *) (AM.SetupFile));
00586     }
00587     namesize = 4; s = *name;
00588     while ( *s ) { s++; namesize++; }
00589     if ( type == SETUPFILE ) indir = AM.SetupDir;
00590     else indir = AM.IncDir;
00591     if ( indir ) {
00592
00593         s = indir; i = 0;
00594         while ( *s ) { s++; i++; }
00595         newname = (UBYTE *)Malloca(namesize+i,"LocateFile");
00596         s = indir; to = newname;
00597         while ( *s ) *to++ = *s++;
00598         if ( to > newname && to[-1] != SEPARATOR ) *to++ = SEPARATOR;
00599         s = *name;
00600         while ( *s ) *to++ = *s++;
00601         *to = 0;
00602         handle = OpenFile((char *) newname);
00603         if ( handle >= 0 ) {
00604             *name = newname;
00605             return(handle);
00606         }
00607         M_free(newname,"LocateFile, incdir/file");
00608     }
00609     if ( type == SETUPFILE ) {
00610         handle = OpenFile(setupfilename);
00611         if ( handle >= 0 ) return(handle);
00612         s = (UBYTE *)getenv("FORMSETUP");

```

```

00613         if ( s ) {
00614             handle = OpenFile((char *)s);
00615             if ( handle >= 0 ) return(handle);
00616             MesPrint("Could not open setup file %s",s);
00617         }
00618     }
00619     if ( type != SETUPFILE && AM.Path ) {
00620         ul = AM.Path;
00621         while ( *ul ) {
00622             u2 = ul; i = 0;
00623 #ifndef WINDOWS
00624             while ( *ul && *ul != ';' ) {
00625                 ul++; i++;
00626             }
00627 #else
00628             while ( *ul && *ul != ':' ) {
00629                 if ( *ul == '\\\' ) ul++;
00630                 ul++; i++;
00631             }
00632 #endif
00633             newname = (UBYTE *)Malloc1(namesize+i,"LocateFile");
00634             s = u2; to = newname;
00635             while ( s < ul ) {
00636 #ifndef WINDOWS
00637                 if ( *s == '\\\' ) s++;
00638 #endif
00639                 *to++ = *s++;
00640             }
00641             if ( to > newname && to[-1] != SEPARATOR ) *to++ = SEPARATOR;
00642             s = *name;
00643             while ( *s ) *to++ = *s++;
00644             *to = 0;
00645             handle = OpenFile((char *)newname);
00646             if ( handle >= 0 ) {
00647                 *name = newname;
00648                 return(handle);
00649             }
00650             M_free(newname,"LocateFile Path/file");
00651             if ( *ul ) ul++;
00652         }
00653     }
00654     if ( type != SETUPFILE && type >= -1 ) Error1("LocateFile: Cannot find file",*name);
00655     return(-1);
00656 }
00657
00658 /*
00659     #] LocateFile :
00660     #[ CloseStream :
00661 */
00662
00663 STREAM *CloseStream(STREAM *stream)
00664 {
00665     int newstr = stream->previous, sgn;
00666     UBYTE *t, numbuf[24];
00667     LONG x;
00668     if ( stream->FoldName ) {
00669         M_free(stream->FoldName,"stream->FoldName");
00670         stream->FoldName = 0;
00671     }
00672     if ( stream->type == FILESTREAM || stream->type == REVERSEFILESTREAM ) {
00673         CloseFile(stream->handle);
00674         if ( stream->buffer != 0 ) M_free(stream->buffer,"name of input stream");
00675         stream->buffer = 0;
00676     }
00677 #ifndef WITHPIPE
00678     else if ( stream->type == PIPESTREAM ) {
00679         RWLOCKW(AM.handlelock);
00680 #endif
00681     if ( PF.me == MASTER )
00682 #endif
00683         pclose((FILE *) (filelist[stream->handle]));
00684         filelist[stream->handle] = 0;
00685         numinfilelist--;
00686         UNRWLOCK(AM.handlelock);
00687 #ifndef WITHMPI
00688         if ( stream->buffer != 0 ) {
00689             M_free(stream->buffer, "pipe buffer");
00690             stream->buffer = 0;
00691         }
00692 #endif
00693     }
00694 #endif
00695 /*[14apr2004 mt]:*/
00696 #ifndef WITHEXTERNALCHANNEL
00697     else if ( stream->type == EXTERNALCHANNELSTREAM ) {
00698         int *tmpn;
00699         RWLOCKW(AM.handlelock);

```

```

00700         tmpn = (int *) (filelist[stream->handle]);
00701         filelist[stream->handle] = 0;
00702         numinfilelist--;
00703         UNRWLOCK(AM.handlelock);
00704         M_free(tmpn, "external channel handle");
00705     }
00706 #endif /*ifdef WITHEXTERNALCHANNEL*/
00707 /*:[14apr2004 mt]*/
00708     else if ( stream->type == INPUTSTREAM ) {
00709         FILES *f;
00710         RWLOCKW(AM.handlelock);
00711         f = filelist[stream->handle];
00712         filelist[stream->handle] = 0;
00713         numinfilelist--;
00714         UNRWLOCK(AM.handlelock);
00715         M_free(f, "input stream handle");
00716     }
00717     else if ( stream->type == PREVARSTREAM && (
00718 stream->afterwards == PRERAISEAFTER || stream->afterwards == PRELOWERAFTER ) ) {
00719         t = stream->buffer; x = 0; sgn = 1;
00720         while ( *t == '-' || *t == '+' ) {
00721             if ( *t == '-' ) sgn = -sgn;
00722             t++;
00723         }
00724         if ( FG.cTable[*t] == 1 ) {
00725             while ( *t && FG.cTable[*t] == 1 ) x = 10*x + *t++ - '0';
00726             if ( *t == 0 ) {
00727                 if ( stream->afterwards == PRERAISEAFTER ) x = sgn*x + 1;
00728                 else x = sgn*x - 1;
00729                 NumToStr(numbuf, x);
00730                 PutPreVar(stream->pname, numbuf, 0, 1);
00731             }
00732         }
00733     }
00734     else if ( stream->type == DOLLARSTREAM && (
00735 stream->afterwards == PRERAISEAFTER || stream->afterwards == PRELOWERAFTER ) ) {
00736         if ( stream->afterwards == PRERAISEAFTER ) x = 1;
00737         else x = -1;
00738         DollarRaiseLow(stream->pname, x);
00739         if ( stream->buffer ) M_free(stream->buffer, "stream->buffer");
00740         stream->buffer = 0;
00741     }
00742     else if ( stream->type == PRECALCSTREAM || stream->type == DOLLARSTREAM ) {
00743         if ( stream->buffer ) M_free(stream->buffer, "stream->buffer");
00744         stream->buffer = 0;
00745     }
00746     if ( stream->name && stream->type != PREVARSTREAM
00747 && stream->type != PREREADSTREAM && stream->type != PREREADSTREAM2 && stream->type !=
PREREADSTREAM3
&& stream->type != PRECALCSTREAM && stream->type != DOLLARSTREAM ) {
00748         M_free(stream->name, "stream->name");
00749     }
00750     stream->name = 0;
00751 /* if ( stream->type != FILESTREAM ) */
00752 AC.NoShowInput = stream->previousNoShowInput;
00753 stream->buffer = 0; /* To make sure we will not reuse it */
00754 stream->pointer = 0;
00755 /*
00756 Look whether we have to pop preprocessor variables.
00757 */
00758 if ( stream->prevars >= 0 ) {
00759     while ( NumPre > stream->prevars ) {
00760         NumPre--;
00761         M_free(PreVar[NumPre].name, "PreVar[NumPre].name");
00762         PreVar[NumPre].name = PreVar[NumPre].value = 0;
00763     }
00764 }
00765 if ( stream->type == PREVARSTREAM ) {
00766     AP.AllowDelay = stream->olddelay;
00767     ClearMacro(stream->pname);
00768     M_free(stream->pname, "stream->pname");
00769 }
00770 else if ( stream->type == DOLLARSTREAM ) {
00771     M_free(stream->pname, "stream->pname");
00772 }
00773 AC.NumStreams--;
00774 if ( newstr >= 0 ) return(AC.Streams + newstr);
00775 else return(0);
00776 }
00777 }
00778
00779 /*
00780 #] CloseStream :
00781 #[ CreateStream :
00782 */
00783
00784 STREAM *CreateStream(UBYTE *where)
00785 {

```

```

00786     STREAM *newstreams;
00787     int numnewstreams,i;
00788     int offset;
00789     if ( AC.NumStreams >= AC.MaxNumStreams ) {
00790         if ( AC.MaxNumStreams == 0 ) numnewstreams = 10;
00791         else numnewstreams = 2*AC.MaxNumStreams;
00792         newstreams = (STREAM *)Malloc1(sizeof(STREAM)*(numnewstreams+1),"CreateStream");
00793         if ( AC.MaxNumStreams > 0 ) {
00794             offset = AC.CurrentStream - AC.Streams;
00795             for ( i = 0; i < AC.MaxNumStreams; i++ ) {
00796                 newstreams[i] = AC.Streams[i];
00797             }
00798             AC.CurrentStream = newstreams + offset;
00799         }
00800         else newstreams[0].previous = -1;
00801         AC.MaxNumStreams = numnewstreams;
00802         if ( AC.Streams ) M_free(AC.Streams, (char *)where);
00803         AC.Streams = newstreams;
00804     }
00805     newstreams = AC.Streams+AC.NumStreams++;
00806     newstreams->name = 0;
00807     return(newstreams);
00808 }
00809
00810 /*
00811     #] CreateStream :
00812     #[ GetStreamPosition :
00813 */
00814
00815 LONG GetStreamPosition(STREAM *stream)
00816 {
00817     return(stream->bufferposition + ((LONG)stream->pointer-(LONG)stream->buffer));
00818 }
00819
00820 /*
00821     #] GetStreamPosition :
00822     #[ PositionStream :
00823 */
00824
00825 void PositionStream(STREAM *stream, LONG position)
00826 {
00827     POSITION scrpos;
00828     if ( position >= stream->bufferposition
00829         && position < stream->bufferposition + stream->inbuffer ) {
00830         stream->pointer = stream->buffer + (position-stream->bufferposition);
00831     }
00832     else if ( stream->type == FILESTREAM ) {
00833         SETBASEPOSITION(scrpos,position);
00834         SeekFile(stream->handle,&scrpos,SEEK_SET);
00835         stream->inbuffer = ReadFile(stream->handle,stream->buffer,stream->buffersize);
00836         stream->pointer = stream->buffer;
00837         stream->top = stream->buffer + stream->inbuffer;
00838         stream->bufferposition = position;
00839         stream->fileposition = position + stream->inbuffer;
00840         stream->isnextchar = 0;
00841     }
00842     else {
00843         Error0("Illegal position for stream");
00844         Terminate(-1);
00845     }
00846 }
00847
00848 /*
00849     #] PositionStream :
00850     #[ ReverseStatements :
00851
00852     Reverses the order of the statements in the buffer.
00853     We allocate an extra buffer and copy a bit to and from.
00854     Note that there are some nasties that cannot be resolved.
00855 */
00856
00857 int ReverseStatements(STREAM *stream)
00858 {
00859     UBYTE *spare = (UBYTE *)Malloc1((stream->inbuffer+1)*sizeof(UBYTE),"Reverse copy");
00860     UBYTE *top = stream->buffer + stream->inbuffer, *in, *s, *ss, *out;
00861     out = spare+stream->inbuffer+1;
00862     in = stream->buffer;
00863     while ( in < top ) {
00864         s = in;
00865         if ( *s == AP.ComChar ) {
00866             tocol:;
00867             for(;;) {
00868                 if ( s == top ) { *--out = '\n'; break; }
00869                 if ( *s == '\\\\' ) {
00870                     s++;
00871                     if ( s >= top ) { /* This is an error! */
00872                         irrend:;
00873                         MesPrint("@Irregular end of reverse include file.");

```

```

00873         return(1);
00874     }
00875 }
00876 else if ( *s == '\n' ) {
00877     s++; ss = s;
00878     while ( ss > in ) *--out = *--ss;
00879     in = s;
00880     if ( out[0] == AP.ComChar && ss+6 < s && out[3] == '#' ) {
00881 /*
00882         For folds we have to exchange begin and end
00883 */
00884         if ( out[4] == '[' ) out[4] = ']';
00885         else if ( out[4] == ']' ) out[4] = '[';
00886     }
00887     break;
00888 }
00889     s++;
00890 }
00891 continue;
00892 }
00893 while ( s < top && ( *s == ' ' || *s == '\t' ) ) s++;
00894 if ( *s == '#' ) { /* preprocessor instruction */
00895     goto toeol; /* read to end of line */
00896 }
00897 if ( *s == '.' ) { /* end-of-module instruction */
00898     goto toeol; /* read to end of line */
00899 }
00900 /*
00901 Here we have a regular statement. In principle we scan to ; and its \n
00902 but there are special cases.
00903 1: ; inside a string (in print ".....;")
00904 2: multiple statements on one line.
00905 3: ; + commentary after some blanks.
00906 4: `var' can cause problems.....
00907 */
00908 while ( s < top ) {
00909     if ( *s == ';' ) {
00910         s++;
00911         while ( s < top && ( *s == ' ' || *s == '\t' ) ) s++;
00912         while ( s < top && *s == '\n' ) s++;
00913         if ( s >= top && s[-1] != '\n' ) *s++ = '\n';
00914         ss = s;
00915         while ( ss > in ) *--out = *--ss;
00916         in = s;
00917         break;
00918     }
00919     else if ( *s == '"' ) {
00920         s++;
00921         while ( s < top ) {
00922             if ( *s == '"' ) break;
00923             if ( *s == '\\ ' ) { s++; }
00924             s++;
00925         }
00926         if ( s >= top ) goto irrend;
00927     }
00928     else if ( *s == '\\ ' ) {
00929         s++;
00930         if ( s >= top ) goto irrend;
00931     }
00932     s++;
00933 }
00934 if ( in < top ) { /* Like blank lines at the end */
00935     if ( s >= top && s[-1] != '\n' ) *s++ = '\n';
00936     ss = s;
00937     while ( ss > in ) *--out = *--ss;
00938     in = s;
00939 }
00940 }
00941 if ( out == spare ) stream->inbuffer++;
00942 if ( out > spare+1 ) {
00943     MesPrint("@Internal error in #reverseinclude instruction.");
00944     return(1);
00945 }
00946 memcpy((void *) (stream->buffer), (void *) out, (size_t) (stream->inbuffer*sizeof(UBYTE)));
00947 M_free(spare, "Reverse copy");
00948 return(0);
00949 }
00950
00951 /*
00952     #] ReverseStatements :
00953     #] Streams :
00954     #[ Files :
00955     #[ StartFiles :
00956 */
00957
00958 void StartFiles(void)
00959 {

```

```

00960     int i = CreateHandle();
00961     filelist[i] = Ustdout;
00962     AM.Stdout = i;
00963     AC.StoreHandle = -1;
00964     AC.LogHandle = -1;
00965 #ifndef WITHPTHREADS
00966     AR.Fscr[0].handle = -1;
00967     AR.Fscr[1].handle = -1;
00968     AR.Fscr[2].handle = -1;
00969     AR.FoStage4[0].handle = -1;
00970     AR.FoStage4[1].handle = -1;
00971     AR.infile = &(AR.Fscr[0]);
00972     AR.outfile = &(AR.Fscr[1]);
00973     AR.hidefile = &(AR.Fscr[2]);
00974     AR.StoreData.Handle = -1;
00975 #endif
00976     AC.Streams = 0;
00977     AC.MaxNumStreams = 0;
00978 }
00979
00980 /*
00981     #] StartFiles :
00982     #[ OpenFile :
00983 */
00984
00985 int OpenFile(char *name)
00986 {
00987     FILES *f;
00988     int i;
00989
00990     if ( ( f = Uopen(name,"rb") ) == 0 ) return(-1);
00991     /* Usetbuf(f,0); */
00992     i = CreateHandle();
00993     RWLOCKW(AM.handlelock);
00994     filelist[i] = f;
00995     UNRWLOCK(AM.handlelock);
00996     return(i);
00997 }
00998
00999 /*
01000     #] OpenFile :
01001     #[ OpenAddFile :
01002 */
01003
01004 int OpenAddFile(char *name)
01005 {
01006     FILES *f;
01007     int i;
01008     POSITION scrpos;
01009     if ( ( f = Uopen(name,"a+b") ) == 0 ) return(-1);
01010     /* Usetbuf(f,0); */
01011     i = CreateHandle();
01012     RWLOCKW(AM.handlelock);
01013     filelist[i] = f;
01014     UNRWLOCK(AM.handlelock);
01015     TELLFILE(i,&scrpos);
01016     SeekFile(i,&scrpos,SEEK_SET);
01017     return(i);
01018 }
01019
01020 /*
01021     #] OpenAddFile :
01022     #[ ReOpenFile :
01023 */
01024
01025 int ReOpenFile(char *name)
01026 {
01027     FILES *f;
01028     int i;
01029     POSITION scrpos;
01030     if ( ( f = Uopen(name,"r+b") ) == 0 ) return(-1);
01031     i = CreateHandle();
01032     RWLOCKW(AM.handlelock);
01033     filelist[i] = f;
01034     UNRWLOCK(AM.handlelock);
01035     TELLFILE(i,&scrpos);
01036     SeekFile(i,&scrpos,SEEK_SET);
01037     return(i);
01038 }
01039
01040 /*
01041     #] ReOpenFile :
01042     #[ CreateFile :
01043 */
01044
01045 int CreateFile(char *name)
01046 {

```

```

01047     FILES *f;
01048     int i;
01049     if ( ( f = Uopen(name,"w+b") ) == 0 ) return(-1);
01050     i = CreateHandle();
01051     RWLOCKW(AM.handlelock);
01052     filelist[i] = f;
01053     UNRWLOCK(AM.handlelock);
01054     return(i);
01055 }
01056
01057 /*
01058     #] CreateFile :
01059     #[ CreateLogFile :
01060 */
01061
01062 int CreateLogFile(char *name)
01063 {
01064     FILES *f;
01065     int i;
01066     if ( ( f = Uopen(name,"w+b") ) == 0 ) return(-1);
01067     Usetbuf(f,0);
01068     i = CreateHandle();
01069     RWLOCKW(AM.handlelock);
01070     filelist[i] = f;
01071     UNRWLOCK(AM.handlelock);
01072     return(i);
01073 }
01074
01075 /*
01076     #] CreateLogFile :
01077     #[ CloseFile :
01078 */
01079
01080 void CloseFile(int handle)
01081 {
01082     if ( handle >= 0 ) {
01083         FILES *f; /* we need this variable to be thread-safe */
01084         RWLOCKW(AM.handlelock);
01085         f = filelist[handle];
01086         filelist[handle] = 0;
01087         numinfilelist--;
01088         UNRWLOCK(AM.handlelock);
01089         Uclose(f);
01090     }
01091 }
01092
01093 /*
01094     #] CloseFile :
01095     #[ CopyFile :
01096 */
01097
01103 int CopyFile(char *source, char *dest)
01104 {
01105     #define COPYFILEBUFSIZE 40960L
01106     FILE *in, *out;
01107     size_t countin, countout, sumcount;
01108     char *buffer = NULL;
01109
01110     sumcount = (AM.S0->LargeSize+AM.S0->SmallEsize)*sizeof(WORD);
01111     if ( sumcount <= COPYFILEBUFSIZE ) {
01112         sumcount = COPYFILEBUFSIZE;
01113         buffer = (char*)Malloc1(sumcount, "file copy buffer");
01114     }
01115     else {
01116         buffer = (char *) (AM.S0->lBuffer);
01117     }
01118
01119     in = fopen(source, "rb");
01120     if ( in == NULL ) {
01121         perror("CopyFile: ");
01122         return(1);
01123     }
01124     out = fopen(dest, "wb");
01125     if ( out == NULL ) {
01126         perror("CopyFile: ");
01127         return(2);
01128     }
01129
01130     while ( !feof(in) ) {
01131         countin = fread(buffer, 1, sumcount, in);
01132         if ( countin != sumcount ) {
01133             if ( ferror(in) ) {
01134                 perror("CopyFile: ");
01135                 return(3);
01136             }
01137         }
01138         countout = fwrite(buffer, 1, countin, out);

```

```

01139         if ( countin != countout ) {
01140             perror("CopyFile: ");
01141             return(4);
01142         }
01143     }
01144     fclose(in);
01145     fclose(out);
01146     if ( sumcount <= COPYFILEBUFSIZE ) {
01147         M_free(buffer, "file copy buffer");
01148     }
01149     return(0);
01150 }
01151 }
01152
01153 /*
01154     #] CopyFile :
01155     #[ CreateHandle :
01156
01157     We need a lock here.
01158     Problem: the same lock is needed inside Malloc1 and M_free which
01159     is used in DoubleList when we use MALLOCDEBUG
01160
01161     Conclusion: MALLOCDEBUG will have to be a bit unsafe
01162 */
01163
01164 int CreateHandle(void)
01165 {
01166     int i, j;
01167     #ifndef MALLOCDEBUG
01168         RWLOCKW(AM.handlelock);
01169     #endif
01170     if ( filelistsize == 0 ) {
01171         filelistsize = 10;
01172         filelist = (FILES **)Malloc1(sizeof(FILES *)*filelistsize,"file handle");
01173         for ( j = 0; j < filelistsize; j++ ) filelist[j] = 0;
01174         numinfilelist = 1;
01175         i = 0;
01176     }
01177     else if ( numinfilelist >= filelistsize ) {
01178         void **fl = (void **)filelist;
01179         i = filelistsize;
01180         if ( DoubleList((void **)(fl), &filelistsize, (int)sizeof(FILES *),
01181             "list of open files") != 0 ) Terminate(-1);
01182         filelist = (FILES **)fl;
01183         for ( j = i; j < filelistsize; j++ ) filelist[j] = 0;
01184         numinfilelist = i + 1;
01185     }
01186     else {
01187         i = filelistsize;
01188         for ( j = 0; j < filelistsize; j++ ) {
01189             if ( filelist[j] == 0 ) { i = j; break; }
01190         }
01191         numinfilelist++;
01192     }
01193     filelist[i] = (FILES *) (filelist); /* Just for now to not get into problems */
01194 /*
01195     The next code is not needed when we use open.
01196     It may be needed when we use fopen.
01197     fopen is used in minos.c without this central administration.
01198 */
01199     if ( numinfilelist > MAX_OPEN_FILES ) {
01200     #ifndef MALLOCDEBUG
01201         UNRWLOCK(AM.handlelock);
01202     #endif
01203         MesPrint("More than %d open files", MAX_OPEN_FILES);
01204         Error0("System limit. This limit is not due to FORM!");
01205     }
01206     else {
01207     #ifndef MALLOCDEBUG
01208         UNRWLOCK(AM.handlelock);
01209     #endif
01210     }
01211     return(i);
01212 }
01213
01214 /*
01215     #] CreateHandle :
01216     #[ ReadFile :
01217 */
01218
01219 LONG ReadFile(int handle, UBYTE *buffer, LONG size)
01220 {
01221     LONG inbuf = 0, r;
01222     FILES *f;
01223     char *b;
01224     b = (char *)buffer;
01225     for(;;) { /* Gotta do difficult because of VMS! */

```



```

01226     RWLOCKR(AM.handlelock);
01227     f = filelist[handle];
01228     UNRWLOCK(AM.handlelock);
01229 #ifdef WITHSTATS
01230     numreads++;
01231 #endif
01232     r = Uread(b,1,size,f);
01233     if ( r < 0 ) return(r);
01234     if ( r == 0 ) return(inbuf);
01235     inbuf += r;
01236     if ( r == size ) return(inbuf);
01237     if ( r > size ) return(-1);
01238     size -= r;
01239     b += r;
01240 }
01241 }
01242
01243 /*
01244     #] ReadFile :
01245     #[ ReadPosFile :
01246
01247     Gets words from a file(handle).
01248     First tries to get the information from the buffers.
01249     Reads a file at a position. Updates the position.
01250     Places a lock in the case of multithreading.
01251     Exists for multiple reading from the same file.
01252     size is the number of WORDs to read!!!!
01253
01254     We may need some strategy in the caching. This routine is used from
01255     GetOneTerm only. The problem is when it reads brackets and the
01256     brackets are read backwards. This is very uneconomical because
01257     each time it may read a large buffer.
01258     On the other hand, reading piece by piece in GetOneTerm takes
01259     much overhead as well.
01260     Two strategies come to mind:
01261     1: keep things as they are but limit the size of the buffers.
01262     2: have the position of 'pos' at about 1/3 of the buffer.
01263         this is of course guess work.
01264     Currently we have implemented the first method by creating the
01265     setup parameter threadscratchsize with the default value 100K.
01266     In the test program much bigger values gave a slower program.
01267 */
01268
01269 LONG ReadPosFile(PHEAD FILEHANDLE *fi, UBYTE *buffer, LONG size, POSITION *pos)
01270 {
01271     GETBIDENTITY
01272     LONG i, retval = 0;
01273     WORD *b = (WORD *)buffer, *t;
01274
01275     if ( fi->handle < 0 ) {
01276         fi->POfill = (WORD *) ((UBYTE *) (fi->PObuffer) + BASEPOSITION(*pos));
01277         t = fi->POfill;
01278         while ( size > 0 && fi->POfill < fi->POfull ) { *b++ = *t++; size--; }
01279     }
01280     else {
01281         if ( ISLESSPOS(*pos,fi->POposition) || ISGEPOSINC(*pos,fi->POposition,
01282             ((UBYTE *) (fi->POfull)-(UBYTE *) (fi->PObuffer))) ) {
01283             /*
01284                 The start is not inside the buffer. Fill the buffer.
01285             */
01286
01287             fi->POposition = *pos;
01288             LOCK(AS.inputslock);
01289             SeekFile(fi->handle,pos,SEEK_SET);
01290             retval = ReadFile(fi->handle,(UBYTE *) (fi->PObuffer),fi->POsize);
01291             UNLOCK(AS.inputslock);
01292             fi->POfull = fi->PObuffer+retval/sizeof(WORD);
01293             fi->POfill = fi->PObuffer;
01294             if ( fi != AR.hidefile ) AR.InInBuf = retval/sizeof(WORD);
01295             else AR.InHiBuf = retval/sizeof(WORD);
01296         }
01297         else {
01298             fi->POfill = (WORD *) ((UBYTE *) (fi->PObuffer) + DIFBASE(*pos,fi->POposition));
01299         }
01300         if ( fi->POfill + size <= fi->POfull ) {
01301             t = fi->POfill;
01302             while ( size > 0 ) { *b++ = *t++; size--; }
01303         }
01304         else {
01305             for (;;) {
01306                 i = fi->POfull - fi->POfill; t = fi->POfill;
01307                 if ( i > size ) i = size;
01308                 size -= i;
01309                 while ( --i >= 0 ) *b++ = *t++;
01310                 if ( size == 0 ) break;
01311                 ADDPOS(fi->POposition,(UBYTE *) (fi->POfull)-(UBYTE *) (fi->PObuffer));
01312                 LOCK(AS.inputslock);

```

```

01313         SeekFile(fi->handle,&(fi->PPosition),SEEK_SET);
01314         retval = ReadFile(fi->handle,(UBYTE *) (fi->Pbuffer),fi->Psize);
01315         UNLOCK(AS.inputslock);
01316         fi->POfull = fi->Pbuffer+retval/sizeof(WORD);
01317         fi->POfill = fi->Pbuffer;
01318         if ( fi != AR.hidefile ) AR.InInBuf = retval/sizeof(WORD);
01319         else AR.InHiBuf = retval/sizeof(WORD);
01320         if ( retval == 0 ) { t = fi->POfill; break; }
01321     }
01322 }
01323 }
01324     retval = (UBYTE *)b - buffer;
01325     fi->POfill = t;
01326     ADDPOS(*pos,retval);
01327     return(retval);
01328 }
01329
01330 /*
01331     #] ReadPosFile :
01332     #[ WriteFile :
01333 */
01334
01335 LONG WriteFileToFile(int handle, UBYTE *buffer, LONG size)
01336 {
01337     FILES *f;
01338     LONG retval, totalwritten = 0, stilltowrite;
01339     RWLOCKR(AM.handlelock);
01340     f = filelist[handle];
01341     UNRWLOCK(AM.handlelock);
01342     while ( totalwritten < size ) {
01343         stilltowrite = size - totalwritten;
01344         #ifdef WITHSTATS
01345             numwrites++;
01346         #endif
01347         retval = Uwrite((char *)buffer+totalwritten,1,stilltowrite,f);
01348         if ( retval < 0 ) return(retval);
01349         if ( retval == 0 ) return(totalwritten);
01350         totalwritten += retval;
01351     }
01352     /*
01353     if ( handle == AC.LogHandle || handle == ERROROUT ) FlushFile(handle);
01354     */
01355     return(totalwritten);
01356 }
01357 #ifndef WITHMPI
01358 /*[17nov2005]:*/
01359 WRITEFILE WriteFile = &WriteFileToFile;
01360 /*
01361 LONG (*WriteFile)(int handle, UBYTE *buffer, LONG size) = &WriteFileToFile;
01362 */
01363 /*:[17nov2005]:*/
01364 #else
01365 WRITEFILE WriteFile = &PF_WriteFileToFile;
01366 #endif
01367
01368 /*
01369     #] WriteFile :
01370     #[ SeekFile :
01371 */
01372
01373 void SeekFile(int handle, POSITION *offset, int origin)
01374 {
01375     FILES *f;
01376     RWLOCKR(AM.handlelock);
01377     f = filelist[handle];
01378     UNRWLOCK(AM.handlelock);
01379     #ifdef WITHSTATS
01380         numseeks++;
01381     #endif
01382     if ( origin == SEEK_SET ) {
01383         Useek(f,BASEPOSITION(*offset),origin);
01384         SETBASEPOSITION(*offset,(Utell(f)));
01385         return;
01386     }
01387     else if ( origin == SEEK_END ) {
01388         Useek(f,0,origin);
01389     }
01390     SETBASEPOSITION(*offset,(Utell(f)));
01391 }
01392
01393 /*
01394     #] SeekFile :
01395     #[ TellFile :
01396 */
01397
01398 LONG TellFile(int handle)
01399 {

```

```

01400     POSITION pos;
01401     TELLFILE(handle,&pos);
01402 #ifdef WITHSTATS
01403     numseeks++;
01404 #endif
01405     return(BASEPOSITION(pos));
01406 }
01407
01408 void TELLFILE(int handle, POSITION *position)
01409 {
01410     FILES *f;
01411     RWLOCKR(AM.handlelock);
01412     f = filelist[handle];
01413     UNRWLOCK(AM.handlelock);
01414     SETBASEPOSITION(*position, (Utell(f)));
01415 }
01416
01417 /*
01418     #] TellFile :
01419     #[ FlushFile :
01420 */
01421
01422 void FlushFile(int handle)
01423 {
01424     FILES *f;
01425     RWLOCKR(AM.handlelock);
01426     f = filelist[handle];
01427     UNRWLOCK(AM.handlelock);
01428     Uflush(f);
01429 }
01430
01431 /*
01432     #] FlushFile :
01433     #[ GetPosFile :
01434 */
01435
01436 int GetPosFile(int handle, fpos_t *pospointer)
01437 {
01438     FILES *f;
01439     RWLOCKR(AM.handlelock);
01440     f = filelist[handle];
01441     UNRWLOCK(AM.handlelock);
01442     return(Ugetpos(f,pospointer));
01443 }
01444
01445 /*
01446     #] GetPosFile :
01447     #[ SetPosFile :
01448 */
01449
01450 int SetPosFile(int handle, fpos_t *pospointer)
01451 {
01452     FILES *f;
01453     RWLOCKR(AM.handlelock);
01454     f = filelist[handle];
01455     UNRWLOCK(AM.handlelock);
01456     return(Usetpos(f,(fpos_t *)pospointer));
01457 }
01458
01459 /*
01460     #] SetPosFile :
01461     #[ SynchFile :
01462
01463     It may be that when we use many sort files at the same time there
01464     is a big traffic jam in the cache. This routine is experimental,
01465     just to see whether this improves the situation.
01466     It could also be that the internal disk of the Quad opteron norma
01467     is very slow.
01468 */
01469
01470 void SynchFile(int handle)
01471 {
01472     FILES *f;
01473     if ( handle >= 0 ) {
01474         RWLOCKR(AM.handlelock);
01475         f = filelist[handle];
01476         UNRWLOCK(AM.handlelock);
01477         Usync(f);
01478     }
01479 }
01480
01481 /*
01482     #] SynchFile :
01483     #[ TruncateFile :
01484
01485     It may be that when we use many sort files at the same time there
01486     is a big traffic jam in the cache. This routine is experimental,

```

```

01487         just to see whether this improves the situation.
01488         It could also be that the internal disk of the Quad opteron norma
01489         is very slow.
01490 */
01491
01492 void TruncateFile(int handle)
01493 {
01494     FILES *f;
01495     if ( handle >= 0 ) {
01496         RWLOCKR(AM.handlelock);
01497         f = filelist[handle];
01498         UNRWLOCK(AM.handlelock);
01499         Utruncate(f);
01500     }
01501 }
01502
01503 /*
01504     #] TruncateFile :
01505     #[ GetChannel :
01506
01507     Checks whether we have this file already. If so, we return its
01508     handle. If not and mode == 0, we open the file first and add it
01509     to the buffers.
01510 */
01511
01512 int GetChannel(char *name,int mode)
01513 {
01514     CHANNEL *ch;
01515     int i;
01516     FILES *f;
01517     for ( i = 0; i < NumOutputChannels; i++ ) {
01518         if ( channels[i].name == 0 ) continue;
01519         if ( StrCmp((UBYTE *)name,(UBYTE *) (channels[i].name)) == 0 ) return(channels[i].handle);
01520     }
01521     if ( mode == 1 ) {
01522         MesPrint("&File %s in print statement is not open",name);
01523         MesPrint("    You should open it first with a #write or #append instruction");
01524         return(-1);
01525     }
01526     for ( i = 0; i < NumOutputChannels; i++ ) {
01527         if ( channels[i].name == 0 ) break;
01528     }
01529     if ( i < NumOutputChannels ) { ch = &(channels[i]); }
01530     else { ch = (CHANNEL *)FromList(&AC.Channellist); }
01531     ch->name = (char *)strDup1((UBYTE *)name,"name of channel");
01532     ch->handle = CreateFile(name);
01533     RWLOCKR(AM.handlelock);
01534     f = filelist[ch->handle];
01535     UNRWLOCK(AM.handlelock);
01536     Usetbuf(f,0); /* We turn the buffer off!!!!!!*/
01537     return(ch->handle);
01538 }
01539
01540 /*
01541     #] GetChannel :
01542     #[ GetAppendChannel :
01543
01544     Checks whether we have this file already. If so, we return its
01545     handle. If not, we open the file first and add it to the buffers.
01546 */
01547
01548 int GetAppendChannel(char *name)
01549 {
01550     CHANNEL *ch;
01551     int i;
01552     FILES *f;
01553     for ( i = 0; i < NumOutputChannels; i++ ) {
01554         if ( channels[i].name == 0 ) continue;
01555         if ( StrCmp((UBYTE *)name,(UBYTE *) (channels[i].name)) == 0 ) return(channels[i].handle);
01556     }
01557     for ( i = 0; i < NumOutputChannels; i++ ) {
01558         if ( channels[i].name == 0 ) break;
01559     }
01560     if ( i < NumOutputChannels ) { ch = &(channels[i]); }
01561     else { ch = (CHANNEL *)FromList(&AC.Channellist); }
01562     ch->name = (char *)strDup1((UBYTE *)name,"name of channel");
01563     ch->handle = OpenAddFile(name);
01564     RWLOCKR(AM.handlelock);
01565     f = filelist[ch->handle];
01566     UNRWLOCK(AM.handlelock);
01567     Usetbuf(f,0); /* We turn the buffer off!!!!!!*/
01568     return(ch->handle);
01569 }
01570
01571 /*
01572     #] GetAppendChannel :
01573     #[ CloseChannel :

```

```

01574
01575     Checks whether we have this file already. If so, we close it.
01576 */
01577
01578 int CloseChannel(char *name)
01579 {
01580     int i;
01581     for ( i = 0; i < NumOutputChannels; i++ ) {
01582         if ( channels[i].name == 0 ) continue;
01583         if ( channels[i].name[0] == 0 ) continue;
01584         if ( StrCmp((UBYTE *)name, (UBYTE *) (channels[i].name)) == 0 ) {
01585             CloseFile(channels[i].handle);
01586             M_free(channels[i].name, "CloseChannel");
01587             channels[i].name = 0;
01588             return(0);
01589         }
01590     }
01591     return(0);
01592 }
01593
01594 /*
01595     #] CloseChannel :
01596     #[ UpdateMaxSize :
01597
01598     Updates the maximum size of the combined input/output/hide scratch
01599     files, the sort files and the .str file.
01600     The result becomes only visible with either
01601         ON totalsize;
01602         #: totalsize ON;
01603     or the -T in the command tail.
01604
01605     To be called, whenever a file is closed/removed or truncated to zero.
01606
01607     We have no provisions yet for expressions that remain inside the
01608     small or large buffer during the sort. The space they use there is
01609     currently ignored.
01610 */
01611
01612 void UpdateMaxSize(void)
01613 {
01614     POSITION position, sumsize;
01615     int i;
01616     FILEHANDLE *scr;
01617 #ifdef WITHMPI
01618     /* Currently, it works only on the master. The sort files on the slaves
01619      * are ignored. (TU 11 Oct 2011) */
01620     if ( PF.me != MASTER ) return;
01621 #endif
01622     PUTZERO(sumsize);
01623     if ( AM.PrintTotalSize ) {
01624         /*
01625             First the three scratch files
01626         */
01627 #ifdef WITHPTHREADS
01628         scr = AB[0]->R.Fscr;
01629 #else
01630         scr = AR.Fscr;
01631 #endif
01632         for ( i = 0; i <=2; i++ ) {
01633             if ( scr[i].handle < 0 ) {
01634                 SETBASEPOSITION(position, (scr[i].POfull-scr[i].PObuffer)*sizeof(WORD));
01635             }
01636             else {
01637                 position = scr[i].filesize;
01638             }
01639             ADD2POS(sumsize, position);
01640         }
01641         /*
01642             Now the sort file(s)
01643         */
01644 #ifdef WITHPTHREADS
01645         {
01646             int j;
01647             ALLPRIVATES *B;
01648             for ( j = 0; j < AM.totalnumberofthreads; j++ ) {
01649                 B = AB[j];
01650                 if ( AT.SS && AT.SS->file.handle >= 0 ) {
01651                     position = AT.SS->file.filesize;
01652                 }
01653                 MLOCK(ErrorMessageLock);
01654                 MesPrint("%d: %10p", j, &(AT.SS->file.filesize));
01655                 MUNLOCK(ErrorMessageLock);
01656                 /*
01657                     ADD2POS(sumsize, position);
01658                 */
01659                 if ( AR.FoStage4[0].handle >= 0 ) {
01660                     position = AR.FoStage4[0].filesize;

```

```

01661             ADD2POS (sumsize,position);
01662         }
01663     }
01664 }
01665 #else
01666     if ( AT.SS && AT.SS->file.handle >= 0 ) {
01667         position = AT.SS->file.filesize;
01668         ADD2POS (sumsize,position);
01669     }
01670     if ( AR.FoStage4[0].handle >= 0 ) {
01671         position = AR.FoStage4[0].filesize;
01672         ADD2POS (sumsize,position);
01673     }
01674 #endif
01675 /*
01676     And of course the str file.
01677 */
01678     ADD2POS (sumsize,AC.StoreFileSize);
01679 /*
01680     Finally the test whether it is bigger
01681 */
01682     if ( ISLESSPOS (AS.MaxExprSize,sumsize) ) {
01683 #ifdef WITHPTHREADS
01684         LOCK (AS.MaxExprSizeLock);
01685         if ( ISLESSPOS (AS.MaxExprSize,sumsize) ) AS.MaxExprSize = sumsize;
01686         UNLOCK (AS.MaxExprSizeLock);
01687     #else
01688         AS.MaxExprSize = sumsize;
01689     #endif
01690     }
01691 }
01692     return;
01693 }
01694
01695 /*
01696     #] UpdateMaxSize :
01697     #] Files :
01698     #[ Strings :
01699     #[ StrCmp :
01700 */
01701
01702 int StrCmp (UBYTE *s1, UBYTE *s2)
01703 {
01704     while ( *s1 && *s1 == *s2 ) { s1++; s2++; }
01705     return ((int)*s1-(int)*s2);
01706 }
01707
01708 /*
01709     #] StrCmp :
01710     #[ StrICmp :
01711 */
01712
01713 int StrICmp (UBYTE *s1, UBYTE *s2)
01714 {
01715     while ( *s1 && tolower(*s1) == tolower(*s2) ) { s1++; s2++; }
01716     return ((int)tolower(*s1)-(int)tolower(*s2));
01717 }
01718
01719 /*
01720     #] StrICmp :
01721     #[ StrHICmp :
01722 */
01723
01724 int StrHICmp (UBYTE *s1, UBYTE *s2)
01725 {
01726     while ( *s1 && tolower(*s1) == *s2 ) { s1++; s2++; }
01727     return ((int)tolower(*s1)-(int)(*s2));
01728 }
01729
01730 /*
01731     #] StrHICmp :
01732     #[ StrICont :
01733 */
01734
01735 int StrICont (UBYTE *s1, UBYTE *s2)
01736 {
01737     while ( *s1 && tolower(*s1) == tolower(*s2) ) { s1++; s2++; }
01738     if ( *s1 == 0 ) return(0);
01739     return ((int)tolower(*s1)-(int)tolower(*s2));
01740 }
01741
01742 /*
01743     #] StrICont :
01744     #[ CmpArray :
01745 */
01746
01747 int CmpArray (WORD *t1, WORD *t2, WORD n)

```

```

01748 {
01749     int i,x;
01750     for ( i = 0; i < n; i++ ) {
01751         if ( ( x = (int)(t1[i]-t2[i]) ) != 0 ) return(x);
01752     }
01753     return(0);
01754 }
01755
01756 /*
01757     #] CmpArray :
01758     #[ ConWord :
01759 */
01760
01761 int ConWord(UBYTE *s1, UBYTE *s2)
01762 {
01763     while ( *s1 && ( tolower(*s1) == tolower(*s2) ) ) { s1++; s2++; }
01764     if ( *s1 == 0 ) return(1);
01765     return(0);
01766 }
01767
01768 /*
01769     #] ConWord :
01770     #[ StrLen :
01771 */
01772
01773 int StrLen(UBYTE *s)
01774 {
01775     int i = 0;
01776     while ( *s ) { s++; i++; }
01777     return(i);
01778 }
01779
01780 /*
01781     #] StrLen :
01782     #[ NumToStr :
01783 */
01784
01785 void NumToStr(UBYTE *s, LONG x)
01786 {
01787     UBYTE *t, str[24];
01788     ULONG xx;
01789     t = str;
01790     if ( x < 0 ) { *s++ = '-'; xx = -x; }
01791     else xx = x;
01792     do {
01793         *t++ = xx % 10 + '0';
01794         xx /= 10;
01795     } while ( xx );
01796     while ( t > str ) *s++ = *--t;
01797     *s = 0;
01798 }
01799
01800 /*
01801     #] NumToStr :
01802     #[ WriteString :
01803
01804     Writes a characterstring to the various outputs.
01805     The action may depend on the flags involved.
01806     The type of output is given by type, the string by str and the
01807     number of characters in it by num
01808 */
01809 void WriteString(int type, UBYTE *str, int num)
01810 {
01811     int error = 0;
01812
01813     if ( num > 0 && str[num-1] == 0 ) { num--; }
01814     else if ( num <= 0 || str[num-1] != LINEFEED ) {
01815         AddLineFeed(str,num);
01816     }
01817     /*[15apr2004 mt]:*/
01818     if(type == EXTERNALCHANNELOUT){
01819         if(WriteFile(0,str,num) != num) error = 1;
01820     }else
01821     /*:[15apr2004 mt]*/
01822     if ( AM.silent == 0 || type == ERROROUT ) {
01823         if ( type == INPUTOUT ) {
01824             if ( !AM.FileOnlyFlag && WriteFile(AM.Stdout,(UBYTE *)"      ",4) != 4 ) error = 1;
01825             if ( AC.LogHandle >= 0 && WriteFile(AC.LogHandle,(UBYTE *)"      ",4) != 4 ) error = 1;
01826         }
01827         if ( !AM.FileOnlyFlag && WriteFile(AM.Stdout,str,num) != num ) error = 1;
01828         if ( AC.LogHandle >= 0 && WriteFile(AC.LogHandle,str,num) != num ) error = 1;
01829     }
01830     if ( error ) Terminate(-1);
01831 }
01832
01833 /*
01834     #] WriteString :

```

```

01835      # [ WriteUnfinString :
01836
01837      Writes a characterstring to the various outputs.
01838      The action may depend on the flags involved.
01839      The type of output is given by type, the string by str and the
01840      number of characters in it by num
01841  */
01842
01843 void WriteUnfinString(int type, UBYTE *str, int num)
01844 {
01845     int error = 0;
01846
01847     /*[15apr2004 mt]:*/
01848     if (type == EXTERNALCHANNELOUT) {
01849         if (WriteFile(0, str, num) != num) error = 1;
01850     } else
01851     /*:[15apr2004 mt]:*/
01852     if ( AM.silent == 0 || type == ERROROUT ) {
01853         if ( type == INPUTOUT ) {
01854             if ( !AM.FileOnlyFlag && WriteFile(AM.StdOut, (UBYTE *) "      ", 4) != 4 ) error = 1;
01855             if ( AC.LogHandle >= 0 && WriteFile(AC.LogHandle, (UBYTE *) "      ", 4) != 4 ) error = 1;
01856         }
01857         if ( !AM.FileOnlyFlag && WriteFile(AM.StdOut, str, num) != num ) error = 1;
01858         if ( AC.LogHandle >= 0 && WriteFile(AC.LogHandle, str, num) != num ) error = 1;
01859     }
01860     if ( error ) Terminate(-1);
01861 }
01862
01863 /*
01864     # ] WriteUnfinString :
01865     # [ AddToString :
01866  */
01867
01868 UBYTE *AddToString(UBYTE *outstring, UBYTE *extrastring, int par)
01869 {
01870     UBYTE *s = extrastring, *t, *newstring;
01871     int n, nn;
01872     while ( *s ) { s++; }
01873     n = s - extrastring;
01874     if ( outstring == 0 ) {
01875         s = extrastring;
01876         t = outstring = (UBYTE *) Malloc1(n+1, "AddToString");
01877         NCOPY(t, s, n)
01878         *t++ = 0;
01879         return(outstring);
01880     }
01881     else {
01882         t = outstring;
01883         while ( *t ) t++;
01884         nn = t - outstring;
01885         t = newstring = (UBYTE *) Malloc1(n+nn+2, "AddToString");
01886         s = outstring;
01887         NCOPY(t, s, nn)
01888         if ( par == 1 ) *t++ = ',';
01889         s = extrastring;
01890         NCOPY(t, s, n)
01891         *t = 0;
01892         M_free(outstring, "AddToString");
01893         return(newstring);
01894     }
01895 }
01896
01897 /*
01898     # ] AddToString :
01899     # [ strDup1 :
01900
01901     string duplication with message passing for Malloc1, allowing
01902     this routine to give a more detailed error message if there
01903     is not enough memory.
01904  */
01905
01906 UBYTE *strDup1(UBYTE *instring, char *ifwrong)
01907 {
01908     UBYTE *s = instring, *to;
01909     while ( *s ) s++;
01910     to = s = (UBYTE *) Malloc1((s - instring)+1, ifwrong);
01911     while ( *instring ) *to++ = *instring++;
01912     *to = 0;
01913     return(s);
01914 }
01915
01916 /*
01917     # ] strDup1 :
01918     # [ EndOfToken :
01919  */
01920
01921 UBYTE *EndOfToken(UBYTE *s)

```



```

01922 {
01923     UBYTE c;
01924     while ( ( c = (UBYTE)(FG.cTable[*s]) ) == 0 || c == 1 ) s++;
01925     return(s);
01926 }
01927
01928 /*
01929     #] EndOfToken :
01930     #[ ToToken :
01931 */
01932
01933 UBYTE *ToToken(UBYTE *s)
01934 {
01935     UBYTE c;
01936     while ( *s && ( c = (UBYTE)(FG.cTable[*s]) ) != 0 && c != 1 ) s++;
01937     return(s);
01938 }
01939
01940 /*
01941     #] ToToken :
01942     #[ SkipField :
01943
01944     Skips from s to the end of a declaration field.
01945     par is the number of parentheses that still has to be closed.
01946 */
01947
01948 UBYTE *SkipField(UBYTE *s, int level)
01949 {
01950     while ( *s ) {
01951         if ( *s == ',' && level == 0 ) return(s);
01952         if ( *s == '(' ) level++;
01953         else if ( *s == ')' ) { level--; if ( level < 0 ) level = 0; }
01954         else if ( *s == '[' ) {
01955             SKIPBRA1(s)
01956         }
01957         else if ( *s == '{' ) {
01958             SKIPBRA2(s)
01959         }
01960         s++;
01961     }
01962     return(s);
01963 }
01964
01965 /*
01966     #] SkipField :
01967     #[ ReadSnum :          WORD ReadSnum(p)
01968
01969     Reads a number that should fit in a word.
01970     The number should be unsigned and a negative return value
01971     indicates an irregularity.
01972 */
01973
01974
01975 WORD ReadSnum(UBYTE **p)
01976 {
01977     LONG x = 0;
01978     UBYTE *s;
01979     s = *p;
01980     if ( FG.cTable[*s] == 1 ) {
01981         do {
01982             x = ( x << 3 ) + ( x << 1 ) + ( *s++ - '0' );
01983             if ( x > MAXPOSITIVE ) return(-1);
01984         } while ( FG.cTable[*s] == 1 );
01985         *p = s;
01986         return((WORD)x);
01987     }
01988     else return(-1);
01989 }
01990
01991 /*
01992     #] ReadSnum :
01993     #[ NumCopy :
01994
01995     Adds the decimal representation of a number to a string.
01996 */
01997
01998
01999 UBYTE *NumCopy(WORD y, UBYTE *to)
02000 {
02001     UBYTE *s;
02002     WORD i = 0, j;
02003     UWORD x;
02004     if ( y < 0 ) {
02005         *to++ = '-';
02006     }
02007     x = WordAbs(y);
02008     s = to;

```

```

02009     do { *s++ = (UBYTE)((x % 10)+'0'); i++; } while ( ( x /= 10 ) != 0 );
02010     *s-- = '\0';
02011     j = ( i - 1 ) >> 1;
02012     while ( j >= 0 ) {
02013         i = to[j]; to[j] = s[-j]; s[-j] = (UBYTE)i; j--;
02014     }
02015     return(s+1);
02016 }
02017
02018 /*
02019     #] NumCopy :
02020     #[ LongCopy :
02021
02022     Adds the decimal representation of a number to a string.
02023
02024 */
02025
02026 char *LongCopy(LONG y, char *to)
02027 {
02028     char *s;
02029     WORD i = 0, j;
02030     ULONG x;
02031     if ( y < 0 ) {
02032         *to++ = '-';
02033     }
02034     x = LongAbs(y);
02035     s = to;
02036     do { *s++ = (x % 10)+'0'; i++; } while ( ( x /= 10 ) != 0 );
02037     *s-- = '\0';
02038     j = ( i - 1 ) >> 1;
02039     while ( j >= 0 ) {
02040         i = to[j]; to[j] = s[-j]; s[-j] = (char)i; j--;
02041     }
02042     return(s+1);
02043 }
02044
02045 /*
02046     #] LongCopy :
02047     #[ LongLongCopy :
02048
02049     Adds the decimal representation of a number to a string.
02050     Bugfix feb 2003. y was not pointer!
02051 */
02052
02053 char *LongLongCopy(off_t *y, char *to)
02054 {
02055     /*
02056      * This code fails to print the maximum negative value on systems with two's
02057      * complement. To fix this, we need the unsigned version of off_t with the
02058      * same size, but unfortunately it is undefined. On the other hand, if a
02059      * system is configured with a 64-bit off_t, in practice one never reaches
02060      * 2^63 ~ 10^18 as of 2016. If one really reach such a big number, then it
02061      * would be the time to move on a 128-bit off_t.
02062      */
02063     off_t x = *y;
02064     char *s;
02065     WORD i = 0, j;
02066     if ( x < 0 ) { x = -x; *to++ = '-'; }
02067     s = to;
02068     do { *s++ = (x % 10)+'0'; i++; } while ( ( x /= 10 ) != 0 );
02069     *s-- = '\0';
02070     j = ( i - 1 ) >> 1;
02071     while ( j >= 0 ) {
02072         i = to[j]; to[j] = s[-j]; s[-j] = (char)i; j--;
02073     }
02074     return(s+1);
02075 }
02076
02077 /*
02078     #] LongLongCopy :
02079     #[ MakeDate :
02080
02081     Routine produces a string with the date and time of the run
02082 */
02083
02084 #ifdef ANSI
02085 #else
02086 #ifdef mBSD
02087 #else
02088     static char notime[] = "";
02089 #endif
02090 #endif
02091
02092 UBYTE *MakeDate(void)
02093 {
02094     #ifdef ANSI
02095         time_t tp;

```

```

02096     time(&tp);
02097     return((UBYTE *)ctime(&tp));
02098 #else
02099 #ifdef mBSD
02100     time_t tp;
02101     time(&tp);
02102     return((UBYTE *)ctime(&tp));
02103 #else
02104     return((UBYTE *)notime);
02105 #endif
02106 #endif
02107 }
02108
02109 /*
02110     #] MakeDate :
02111     #[ set_in :
02112         Returns 1 if ch is in set ; 0 if ch is not in set:
02113 */
02114 int set_in(UBYTE ch, set_of_char set)
02115 {
02116     set += ch/8;
02117     switch (ch % 8){
02118         case 0: return(set->bit_0);
02119         case 1: return(set->bit_1);
02120         case 2: return(set->bit_2);
02121         case 3: return(set->bit_3);
02122         case 4: return(set->bit_4);
02123         case 5: return(set->bit_5);
02124         case 6: return(set->bit_6);
02125         case 7: return(set->bit_7);
02126     }/*switch (ch % 8)*/
02127     return(-1);
02128 }/*set_in*/
02129 /*
02130     #] set_in :
02131     #[ set_set :
02132         sets ch into set; returns *set:
02133 */
02134 one_byte set_set(UBYTE ch, set_of_char set)
02135 {
02136     one_byte tmp=(one_byte)set;
02137     set += ch/8;
02138     switch (ch % 8){
02139         case 0: set->bit_0=1;break;
02140         case 1: set->bit_1=1;break;
02141         case 2: set->bit_2=1;break;
02142         case 3: set->bit_3=1;break;
02143         case 4: set->bit_4=1;break;
02144         case 5: set->bit_5=1;break;
02145         case 6: set->bit_6=1;break;
02146         case 7: set->bit_7=1;break;
02147     }
02148     return(tmp);
02149 }/*set_set*/
02150 /*
02151     #] set_set :
02152     #[ set_del :
02153         deletes ch from set; returns *set:
02154 */
02155 one_byte set_del(UBYTE ch, set_of_char set)
02156 {
02157     one_byte tmp=(one_byte)set;
02158     set += ch/8;
02159     switch (ch % 8){
02160         case 0: set->bit_0=0;break;
02161         case 1: set->bit_1=0;break;
02162         case 2: set->bit_2=0;break;
02163         case 3: set->bit_3=0;break;
02164         case 4: set->bit_4=0;break;
02165         case 5: set->bit_5=0;break;
02166         case 6: set->bit_6=0;break;
02167         case 7: set->bit_7=0;break;
02168     }
02169     return(tmp);
02170 }/*set_del*/
02171 /*
02172     #] set_del :
02173     #[ set_sub :
02174         returns *set = set1\set2. This function may be used for initialising,
02175         set_sub(a,a,a) => now a is empty set :
02176 */
02177 one_byte set_sub(set_of_char set, set_of_char set1, set_of_char set2)
02178 {
02179     one_byte tmp=(one_byte)set;
02180     int i=0,j=0;
02181     while (j=0,i++<32)
02182         while (j<9)

```

```

02183         switch (j++){
02184             case 0: set->bit_0=(set1->bit_0&&!set2->bit_0);break;
02185             case 1: set->bit_1=(set1->bit_1&&!set2->bit_1);break;
02186             case 2: set->bit_2=(set1->bit_2&&!set2->bit_2);break;
02187             case 3: set->bit_3=(set1->bit_3&&!set2->bit_3);break;
02188             case 4: set->bit_4=(set1->bit_4&&!set2->bit_4);break;
02189             case 5: set->bit_5=(set1->bit_5&&!set2->bit_5);break;
02190             case 6: set->bit_6=(set1->bit_6&&!set2->bit_6);break;
02191             case 7: set->bit_7=(set1->bit_7&&!set2->bit_7);break;
02192             case 8: set++;set1++;set2++;
02193         };
02194         return (tmp);
02195     }/*set_sub*/
02196     /*
02197         #] set_sub :
02198         #] Strings :
02199         #[ Mixed :
02200         #[ iniTools :
02201     */
02202
02203     void iniTools(void)
02204     {
02205         #ifdef MALLOCPROTECT
02206             if ( mprotectInit() ) exit(0);
02207         #endif
02208         return;
02209     }
02210
02211     /*
02212         #] iniTools :
02213         #[ Malloc1 :
02214
02215         Malloc routine with built in error checking,
02216         and a more detailed error message.
02217         Gives the user some idea of what is happening.
02218     */
02219
02220     #ifdef MALLOCDDEBUG
02221     INILOCK(MallocLock)
02222     #endif
02223
02224     void *Malloc1(LONG size, const char *messageifwrong)
02225     {
02226         void *mem;
02227         #ifdef MALLOCDDEBUG
02228         char *t, *u;
02229         int i;
02230         LOCK(MallocLock);
02231         if ( size == 0 ) {
02232             MesPrint("%wAsking for 0 bytes in Malloc1");
02233         }
02234         #endif
02235         #ifdef WITHSTATS
02236         nummallocs++;
02237         #endif
02238         if ( ( size & 7 ) != 0 ) { size = size - ( size&7 ) + 8; }
02239         #ifdef MALLOCDDEBUG
02240         size += 2*BANNER;
02241         #endif
02242         mem = (void *)M_alloc(size);
02243         if ( mem == 0 ) {
02244             #ifndef MALLOCDDEBUG
02245             MLOCK(ErrorMessageLock);
02246             #endif
02247             MesPrint("Attempted to allocate %l bytes.", size);
02248             MesPrint("@No memory while allocating %s", (UBYTE *)messageifwrong);
02249             #ifndef MALLOCDDEBUG
02250             MUNLOCK(ErrorMessageLock);
02251             #else
02252             UNLOCK(MallocLock);
02253             #endif
02254             Terminate(-1);
02255         }
02256         #ifdef MALLOCDDEBUG
02257         malloccsizes[nummalloclist] = size;
02258         malloccstrings[nummalloclist] = (char *)messageifwrong;
02259         malloclist[nummalloclist++] = mem;
02260         if ( AC.MemDebugFlag && filelist ) MesPrint("%wMem1 at 0x%x: %l bytes.
02261 %s",mem,size,messageifwrong);
02262         {
02263             int i = nummalloclist-1;
02264             while ( --i >= 0 ) {
02265                 if ( (char *)mem < ((char *)malloclist[i]) + malloccsizes[i]
02266                     && (char *)malloclist[i] < ((char *)mem + size) ) {
02267                     if ( filelist ) MesPrint("This memory overlaps with the block at 0x%x"
02268                                     ,malloclist[i]);
02269                 }
02270             }
02271         }
02272         #endif
02273     }

```

```

02269     }
02270 }
02271
02272 #ifdef MALLOCDEBUGOUTPUT
02273     printf ("Malloc1: %s, allocated %li bytes at %.8lx\n",messageifwrong,size,(unsigned long)mem);
02274     fflush (stdout);
02275 #endif
02276
02277     t = (char *)mem;
02278     u = t + size;
02279     for ( i = 0; i < (int)BANNER; i++ ) { *t++ = FILLVALUE; *--u = FILLVALUE; }
02280     mem = (void *)t;
02281     M_check();
02282     /* MUNLOCK(ErrorMessageLock); */
02283     UNLOCK(MallocLock);
02284 #endif
02285 /*
02286     if ( size > 500000000L ) {
02287         MLOCK(ErrorMessageLock);
02288         MesPrint("Malloc1: %s, allocated %l bytes\n",messageifwrong,size);
02289         MUNLOCK(ErrorMessageLock);
02290     }
02291 */
02292     return(mem);
02293 }
02294
02295 /*
02296     #] Malloc1 :
02297     #[ M_free :
02298 */
02299
02300 void M_free(void *x, const char *where)
02301 {
02302 #ifdef MALLOCDEBUG
02303     char *t = (char *)x;
02304     int i, j, k;
02305     LONG size = 0;
02306     x = (void *)(((char *)x)-BANNER);
02307     /* MLOCK(ErrorMessageLock); */
02308     if ( AC.MemDebugFlag ) MesPrint("%wFreeing 0x%x: %s",x,where);
02309     LOCK(MallocLock);
02310     for ( i = nummalloclist-1; i >= 0; i-- ) {
02311         if ( x == malloclist[i] ) {
02312             size = malloclist[i];
02313             for ( j = i+1; j < nummalloclist; j++ ) {
02314                 malloclist[j-1] = malloclist[j];
02315                 malloclist[j-1] = malloclist[j];
02316                 malloclist[j-1] = malloclist[j];
02317             }
02318             nummalloclist--;
02319             break;
02320         }
02321     }
02322     if ( i < 0 ) {
02323         unsigned int xx = ((ULONG)x);
02324         printf("Error returning non-allocated address: 0x%x from %s\n",
02325             ,xx,where);
02326         /* MUNLOCK(ErrorMessageLock); */
02327         UNLOCK(MallocLock);
02328         exit(-1);
02329     }
02330     else {
02331         for ( k = 0, j = 0; k < (int)BANNER; k++ ) {
02332             if ( *--t != FILLVALUE ) j++;
02333         }
02334         if ( j ) {
02335             LONG *tt = (LONG *)x;
02336             MesPrint("%w!!!! Banner has been written in !!!!!: %x %x %x %x",
02337                 tt[0],tt[1],tt[2],tt[3]);
02338         }
02339         t += size;
02340         for ( k = 0, j = 0; k < (int)BANNER; k++ ) {
02341             if ( *--t != FILLVALUE ) j++;
02342         }
02343         if ( j ) {
02344             LONG *tt = (LONG *)x;
02345             MesPrint("%w!!!! Tail has been written in !!!!!: %x %x %x %x",
02346                 tt[0],tt[1],tt[2],tt[3]);
02347         }
02348         M_check();
02349         /* MUNLOCK(ErrorMessageLock); */
02350         UNLOCK(MallocLock);
02351     }
02352 #else
02353     DUMMYUSE(where);
02354 #endif
02355 #ifdef WITHSTATS

```

```

02356     numfrees++;
02357 #endif
02358     if ( x ) {
02359 #ifdef MALLOCDEBUGOUTPUT
02360         printf ("M_free: %s, memory freed at %.8lx\n",where,(unsigned long)x);
02361         fflush(stdout);
02362 #endif
02363
02364 #ifdef MALLOCPROTECT
02365         mprotectFree((void *)x);
02366 #else
02367         free(x);
02368 #endif
02369     }
02370 }
02371
02372 /*
02373     #] M_free :
02374     #[ M_check :
02375 */
02376
02377 #ifdef MALLOCDEBUG
02378
02379 void M_check1() { MesPrint("Checking Malloc"); M_check(); }
02380
02381 void M_check()
02382 {
02383     int i,j,k,error = 0;
02384     char *t;
02385     LONG *tt;
02386     for ( i = 0; i < nummalloclist; i++ ) {
02387         t = (char *) (malloclist[i]);
02388         for ( k = 0, j = 0; k < (int)BANNER; k++ ) {
02389             if ( *t++ != FILLVALUE ) j++;
02390         }
02391         if ( j ) {
02392             tt = (LONG *) (malloclist[i]);
02393             MesPrint("%w!!!! Banner %d (%s) has been written in !!!!!: %x %x %x %x",
02394 i,mallocstrings[i],tt[0],tt[1],tt[2],tt[3]);
02395             tt[0] = tt[1] = tt[2] = tt[3] = 0;
02396             error = 1;
02397         }
02398         t = (char *) (malloclist[i] + malloclsizes[i]);
02399         for ( k = 0, j = 0; k < (int)BANNER; k++ ) {
02400             if ( *--t != FILLVALUE ) j++;
02401         }
02402         if ( j ) {
02403             tt = (LONG *)t;
02404             MesPrint("%w!!!! Tail %d (%s) has been written in !!!!!: %x %x %x %x",
02405 i,mallocstrings[i],tt[0],tt[1],tt[2],tt[3]);
02406             tt[0] = tt[1] = tt[2] = tt[3] = 0;
02407             error = 1;
02408         }
02409         if ( ( mallocstrings[i][0] == ' ' ) || ( mallocstrings[i][0] == '#' ) ) {
02410             MesPrint("%w!!!! Funny mallocstring");
02411             error = 1;
02412         }
02413     }
02414     if ( error ) {
02415         M_print();
02416         /* MUNLOCK(ErrorMessageLock); */
02417         UNLOCK(MallocLock);
02418         Terminate(-1);
02419     }
02420 }
02421
02422 void M_print()
02423 {
02424     int i;
02425     MesPrint("We have the following memory allocations left:");
02426     for ( i = 0; i < nummalloclist; i++ ) {
02427         MesPrint("0x%x: %l bytes. number %d: '%s'",malloclist[i],malloclsizes[i],i,mallocstrings[i]);
02428     }
02429 }
02430
02431 #else
02432
02433 void M_check1(void) {}
02434 void M_print(void) {}
02435
02436 #endif
02437
02438 /*
02439     #] M_check :
02440     #[ TermMalloc :
02441 */
02442
02443 #define TERMMEMSTARTNUM 16

```

```

02465 #define TERMEXTRAWORDS 10
02466
02467 void TermMallocAddMemory(PHEAD0)
02468 {
02469     WORD *newbufs;
02470     int i, extra;
02471     if ( AT.TermMemMax == 0 ) extra = TERMMEMSTARTNUM;
02472     else extra = AT.TermMemMax;
02473     if ( AT.TermMemHeap ) M_free(AT.TermMemHeap,"TermMalloc");
02474     newbufs = (WORD *)Malloc1(extra*(AM.MaxTer+TERMEXTRAWORDS*sizeof(WORD)), "TermMalloc");
02475     AT.TermMemHeap = (WORD **)Malloc1((extra+AT.TermMemMax)*sizeof(WORD *), "TermMalloc");
02476     for ( i = 0; i < extra; i++ ) {
02477         AT.TermMemHeap[i] = newbufs + i*(AM.MaxTer/sizeof(WORD)+TERMEXTRAWORDS);
02478     }
02479 #ifdef TERMMALLOCDEBUG
02480     DebugHeap2 = (WORD **)Malloc1((extra+AT.TermMemMax)*sizeof(WORD *), "TermMalloc");
02481     for ( i = 0; i < AT.TermMemMax; i++ ) { DebugHeap2[i] = DebugHeap1[i]; }
02482     for ( i = 0; i < extra; i++ ) {
02483         DebugHeap2[i+AT.TermMemMax] = newbufs + i*(AM.MaxTer/sizeof(WORD)+TERMEXTRAWORDS);
02484     }
02485     if ( DebugHeap1 ) M_free(DebugHeap1,"TermMalloc");
02486     DebugHeap1 = DebugHeap2;
02487 #endif
02488     AT.TermMemTop = extra;
02489     AT.TermMemMax += extra;
02490 #ifdef TERMMALLOCDEBUG
02491     MesPrint("AT.TermMemMax is now %l",AT.TermMemMax);
02492 #endif
02493 }
02494
02495 #ifndef MEMORYMACROS
02496
02497 WORD *TermMalloc2(PHEAD char *text)
02498 {
02499     if ( AT.TermMemTop <= 0 ) TermMallocAddMemory(BHEAD0);
02500
02501 #ifdef TERMMALLOCDEBUG
02502     MesPrint("TermMalloc: %s, %d",text,(AT.TermMemMax-AT.TermMemTop));
02503 #endif
02504
02505 #ifdef MALLOCDEBUGOUTPUT
02506     MesPrint("TermMalloc: %s, %l/%l (%x)",text,AT.TermMemTop,AT.TermMemMax,AT.TermMemHeap[AT.TermMemTop-1]);
02507 #endif
02508
02509     DUMMYUSE(text);
02510     return(AT.TermMemHeap[--AT.TermMemTop]);
02511 }
02512
02513 void TermFree2(PHEAD WORD *TermMem, char *text)
02514 {
02515 #ifdef TERMMALLOCDEBUG
02516
02517     int i;
02518
02519     for ( i = 0; i < AT.TermMemMax; i++ ) {
02520         if ( TermMem == DebugHeap1[i] ) break;
02521     }
02522     if ( i >= AT.TermMemMax ) {
02523         MesPrint(" ERROR: TermFree called with an address not given by TermMalloc.");
02524         Terminate(-1);
02525     }
02526 #endif
02527     DUMMYUSE(text);
02528     AT.TermMemHeap[AT.TermMemTop++] = TermMem;
02529
02530 #ifdef TERMMALLOCDEBUG
02531     MesPrint("TermFree: %s, %d",text,(AT.TermMemMax-AT.TermMemTop));
02532 #endif
02533 #ifdef MALLOCDEBUGOUTPUT
02534     MesPrint("TermFree: %s, %l/%l (%x)",text,AT.TermMemTop,AT.TermMemMax,TermMem);
02535 #endif
02536 }
02537
02538 #endif
02539
02540 /*
02541     #] TermMalloc :
02542     #[ NumberMalloc :
02543 */
02544 #define NUMBERMEMSTARTNUM 16
02545 #define NUMBEREXTRAWORDS 10L
02546
02547 #ifdef TERMMALLOCDEBUG
02548 UWORD **DebugHeap3, **DebugHeap4;
02549 #endif
02550

```

```

02571 void NumberMallocAddMemory (PHEAD0)
02572 {
02573     UWORD *newbufs;
02574     WORD extra;
02575     int i;
02576     if ( AT.NumberMemMax == 0 ) extra = NUMBERMEMSTARTNUM;
02577     else extra = AT.NumberMemMax;
02578     if ( AT.NumberMemHeap ) M_free(AT.NumberMemHeap, "NumberMalloc");
02579     newbufs = (UWORD *) Malloc1 (extra*(AM.MaxTal+NUMBEREXTRAWORDS)*sizeof(UWORD), "NumberMalloc");
02580     AT.NumberMemHeap = (UWORD **) Malloc1 ((extra+AT.NumberMemMax)*sizeof(UWORD *), "NumberMalloc");
02581     for ( i = 0; i < extra; i++ ) {
02582         AT.NumberMemHeap[i] = newbufs + i*(LONG) (AM.MaxTal+NUMBEREXTRAWORDS);
02583     }
02584 #ifdef TERMMALLOCDEBUG
02585     DebugHeap4 = (UWORD **) Malloc1 ((extra+AT.NumberMemMax)*sizeof(WORD *), "NumberMalloc");
02586     for ( i = 0; i < AT.NumberMemMax; i++ ) { DebugHeap4[i] = DebugHeap3[i]; }
02587     for ( i = 0; i < extra; i++ ) {
02588         DebugHeap4[i+AT.NumberMemMax] = newbufs + i*(LONG) (AM.MaxTal+NUMBEREXTRAWORDS);
02589     }
02590     if ( DebugHeap3 ) M_free(DebugHeap3, "NumberMalloc");
02591     DebugHeap3 = DebugHeap4;
02592 #endif
02593     AT.NumberMemTop = extra;
02594     AT.NumberMemMax += extra;
02595 /*
02596 MesPrint("AT.NumberMemMax is now %l", AT.NumberMemMax);
02597 */
02598 }
02599 #ifndef MEMORYMACROS
02600 UWORD *NumberMalloc2(PHEAD char *text)
02601 {
02602     if ( AT.NumberMemTop <= 0 ) NumberMallocAddMemory(BHEAD text);
02603 #ifdef MALLOCDEBUGOUTPUT
02604     if ( (AT.NumberMemMax-AT.NumberMemTop) > 10 )
02605         MesPrint("NumberMalloc: %s, %l/%l (%x)", text, AT.NumberMemTop, AT.NumberMemMax, AT.NumberMemHeap[AT.NumberMemTop-1]);
02606 #endif
02607     DUMMYUSE(text);
02608     return (AT.NumberMemHeap[--AT.NumberMemTop]);
02609 }
02610 void NumberFree2(PHEAD UWORD *NumberMem, char *text)
02611 {
02612 #ifdef TERMMALLOCDEBUG
02613     int i;
02614     for ( i = 0; i < AT.NumberMemMax; i++ ) {
02615         if ( NumberMem == DebugHeap3[i] ) break;
02616     }
02617     if ( i >= AT.NumberMemMax ) {
02618         MesPrint(" ERROR: NumberFree called with an address not given by NumberMalloc.");
02619         Terminate(-1);
02620     }
02621 #endif
02622     DUMMYUSE(text);
02623     AT.NumberMemHeap[AT.NumberMemTop++] = NumberMem;
02624 #ifdef MALLOCDEBUGOUTPUT
02625     if ( (AT.NumberMemMax-AT.NumberMemTop) > 10 )
02626         MesPrint("NumberFree: %s, %l/%l (%x)", text, AT.NumberMemTop, AT.NumberMemMax, NumberMem);
02627 #endif
02628 }
02629 #endif
02630 /*
02631 #] NumberMalloc :
02632 #[ CacheNumberMalloc :
02633
02634 Similar to NumberMalloc
02635 */
02636 void CacheNumberMallocAddMemory (PHEAD0)
02637 {
02638     UWORD *newbufs;
02639     WORD extra;
02640     int i;
02641     if ( AT.CacheNumberMemMax == 0 ) extra = NUMBERMEMSTARTNUM;
02642     else extra = AT.CacheNumberMemMax;
02643     if ( AT.CacheNumberMemHeap ) M_free(AT.CacheNumberMemHeap, "NumberMalloc");
02644     newbufs = (UWORD *) Malloc1 (extra*(AM.MaxTal+NUMBEREXTRAWORDS)*sizeof(UWORD), "CacheNumberMalloc");
02645     AT.CacheNumberMemHeap = (UWORD **) Malloc1 ((extra+AT.NumberMemMax)*sizeof(UWORD
02646     *), "CacheNumberMalloc");
02647     for ( i = 0; i < extra; i++ ) {

```



```

02656     AT.CacheNumberMemHeap[i] = newbufs + i*(LONG)(AM.MaxTal+NUMBEREXTRAWORDS);
02657 }
02658 AT.CacheNumberMemTop = extra;
02659 AT.CacheNumberMemMax += extra;
02660 }
02661
02662 #ifndef MEMORYMACROS
02663
02664 UWORD *CacheNumberMalloc2(PHEAD char *text)
02665 {
02666     if ( AT.CacheNumberMemTop <= 0 ) CacheNumberMallocAddMemory(BHEAD0);
02667
02668 #ifdef MALLOCDEBUGOUTPUT
02669     MesPrint("NumberMalloc: %s, %l/%l (%x)",text,AT.NumberMemTop,AT.NumberMemMax,AT.NumberMemHeap[AT.NumberMemTop-1]);
02670 #endif
02671
02672     DUMMYUSE(text);
02673     return(AT.CacheNumberMemHeap[--AT.CacheNumberMemTop]);
02674 }
02675
02676 void CacheNumberFree2(PHEAD UWORD *NumberMem, char *text)
02677 {
02678     DUMMYUSE(text);
02679     AT.CacheNumberMemHeap[AT.CacheNumberMemTop++] = NumberMem;
02680
02681 #ifdef MALLOCDEBUGOUTPUT
02682     MesPrint("NumberFree: %s, %l/%l (%x)",text,AT.NumberMemTop,AT.NumberMemMax,NumberMem);
02683 #endif
02684 }
02685
02686 #endif
02687
02688 /*
02689     #] CacheNumberMalloc :
02690     #[ FromList :
02691
02692     Returns the next object in a list.
02693     If the list has been exhausted we double it (like a realloc)
02694     If the list has not been initialized yet we start with 12 elements.
02695 */
02696
02697 void *FromList(LIST *L)
02698 {
02699     void *newlist;
02700     int i, *old, *newL;
02701     if ( L->num >= L->maxnum || L->lijst == 0 ) {
02702         if ( L->maxnum == 0 ) L->maxnum = 12;
02703         else if ( L->lijst ) L->maxnum *= 2;
02704         newlist = Malloc1(L->maxnum * L->size,L->message);
02705         if ( L->lijst ) {
02706             i = ( L->num * L->size ) / sizeof(int);
02707             old = (int *)L->lijst; newL = (int *)newlist;
02708             while ( --i >= 0 ) *newL++ = *old++;
02709             if ( L->lijst ) M_free(L->lijst,"L->lijst FromList");
02710         }
02711         L->lijst = newlist;
02712     }
02713     return( ((char *) (L->lijst)) + L->size * (L->num)++ );
02714 }
02715
02716 /*
02717     #] FromList :
02718     #[ From0List :
02719
02720     Same as FromList, but we zero excess variables.
02721 */
02722
02723 void *From0List(LIST *L)
02724 {
02725     void *newlist;
02726     int i, *old, *newL;
02727     if ( L->num >= L->maxnum || L->lijst == 0 ) {
02728         if ( L->maxnum == 0 ) L->maxnum = 12;
02729         else if ( L->lijst ) L->maxnum *= 2;
02730         newlist = Malloc1(L->maxnum * L->size,L->message);
02731         i = ( L->num * L->size ) / sizeof(int);
02732         old = (int *) (L->lijst); newL = (int *) newlist;
02733         while ( --i >= 0 ) *newL++ = *old++;
02734         i = ( L->maxnum - L->num ) / sizeof(int);
02735         while ( --i >= 0 ) *newL++ = 0;
02736         if ( L->lijst ) M_free(L->lijst,"L->lijst From0List");
02737         L->lijst = newlist;
02738     }
02739     return( ((char *) (L->lijst)) + L->size * (L->num)++ );
02740 }
02741

```

```

02742 /*
02743     #] From0List :
02744     #[ FromVarList :
02745
02746     Returns the next object in a list of variables.
02747     If the list has been exhausted we double it (like a realloc)
02748     If the list has not been initialized yet we start with 12 elements.
02749     We allow at most MAXVARIABLES elements!
02750 */
02751
02752 void *FromVarList(LIST *L)
02753 {
02754     void *newlist;
02755     int i, *old, *newL;
02756     if ( L->num >= L->maxnum || L->lijst == 0 ) {
02757         if ( L->maxnum == 0 ) L->maxnum = 12;
02758         else if ( L->lijst ) {
02759             L->maxnum *= 2;
02760             if ( L == &(AP.DollarList) ) {
02761                 if ( L->maxnum > MAXDOLLARVARIABLES ) L->maxnum = MAXDOLLARVARIABLES;
02762                 if ( L->num >= MAXDOLLARVARIABLES ) {
02763                     MesPrint("!!!More than %l objects in list of $-variables",
02764                             MAXDOLLARVARIABLES);
02765                     Terminate(-1);
02766                 }
02767             }
02768             else {
02769                 if ( L->maxnum > MAXVARIABLES ) L->maxnum = MAXVARIABLES;
02770                 if ( L->num >= MAXVARIABLES ) {
02771                     MesPrint("!!!More than %l objects in list of variables",
02772                             MAXVARIABLES);
02773                     Terminate(-1);
02774                 }
02775             }
02776         }
02777         newlist = Malloc1(L->maxnum * L->size, L->message);
02778         if ( L->lijst ) {
02779             i = ( L->num * L->size ) / sizeof(int);
02780             old = (int *) (L->lijst); newL = (int *) newlist;
02781             while ( --i >= 0 ) *newL++ = *old++;
02782             if ( L->lijst ) M_free(L->lijst, "L->lijst from VarList");
02783         }
02784         L->lijst = newlist;
02785     }
02786     return( ((char *) (L->lijst)) + L->size * ((L->num)++) );
02787 }
02788
02789 /*
02790     #] FromVarList :
02791     #[ DoubleList :
02792 */
02793
02794 int DoubleList(void ***lijst, int *oldsize, int objectsize, char *nameoftype)
02795 {
02796     void **newlist;
02797     LONG i, newsize, fullsize;
02798     void **to, **from;
02799     static LONG maxlistsize = (LONG) (MAXPOSITIVE);
02800     if ( *lijst == 0 ) {
02801         if ( *oldsize > 0 ) newsize = *oldsize;
02802         else newsize = 100;
02803     }
02804     else newsize = *oldsize * 2;
02805     if ( newsize > maxlistsize ) {
02806         if ( *oldsize == maxlistsize ) {
02807             MesPrint("No memory for extra space in %s", nameoftype);
02808             return(-1);
02809         }
02810         newsize = maxlistsize;
02811     }
02812     fullsize = ( newsize * objectsize + sizeof(void *) - 1 ) & (~sizeof(void *));
02813     newlist = (void **) Malloc1(fullsize, nameoftype);
02814     if ( *lijst ) { /* Now some punning. DANGEROUS CODE in principle */
02815         to = newlist; from = *lijst; i = (*oldsize * objectsize) / sizeof(void *);
02816     }
02817     #ifdef MALLOCDDEBUG
02818     if ( filelist ) MesPrint("    oldsize: %l, objectsize: %d, fullsize: %l"
02819                             , *oldsize, objectsize, fullsize);
02820     #endif
02821     /*
02822         while ( --i >= 0 ) *to++ = *from++;
02823     */
02824     if ( *lijst ) M_free(*lijst, "DoubleList");
02825     *lijst = newlist;
02826     *oldsize = newsize;
02827     return(0);
02828 }

```

```

02829     int error;
02830     LONG lsize = *oldsize;
02831
02832     maxlistsize = (LONG) (MAXPOSITIVE);
02833     error = DoubleLList(lijst, &lsize, objectsize, nameoftype);
02834     *oldsize = lsize;
02835     maxlistsize = (LONG) (MAXLONG);
02836
02837     return(error);
02838 */
02839 }
02840
02841 /*
02842     #] DoubleList :
02843     #[ DoubleLList :
02844 */
02845
02846 int DoubleLList(void ***lijst, LONG *oldsize, int objectsize, char *nameoftype)
02847 {
02848     void **newlist;
02849     LONG i, newsize, fullsize;
02850     void **to, **from;
02851     static LONG maxlistsize = (LONG) (MAXLONG);
02852     if ( *lijst == 0 ) {
02853         if ( *oldsize > 0 ) newsize = *oldsize;
02854         else newsize = 100;
02855     }
02856     else newsize = *oldsize * 2;
02857     if ( newsize > maxlistsize ) {
02858         if ( *oldsize == maxlistsize ) {
02859             MesPrint("No memory for extra space in %s", nameoftype);
02860             return(-1);
02861         }
02862         newsize = maxlistsize;
02863     }
02864     fullsize = ( newsize * objectsize + sizeof(void *)-1 ) & (-sizeof(void *));
02865     newlist = (void **) Malloc1(fullsize, nameoftype);
02866     if ( *lijst ) { /* Now some punning. DANGEROUS CODE in principle */
02867         to = newlist; from = *lijst; i = (*oldsize * objectsize)/sizeof(void *);
02868     /*
02869     #ifdef MALLOCDEBUG
02870     if ( filelist ) MesPrint("    oldsize: %l, objectsize: %d, fullsize: %l"
02871         , *oldsize, objectsize, fullsize);
02872     #endif
02873     */
02874         while ( --i >= 0 ) *to++ = *from++;
02875     }
02876     if ( *lijst ) M_free(*lijst, "DoubleLList");
02877     *lijst = newlist;
02878     *oldsize = newsize;
02879     return(0);
02880 }
02881
02882 /*
02883     #] DoubleLList :
02884     #[ DoubleBuffer :
02885 */
02886
02887 #define DODOUBLE(x) { x *s, *t, *u; if ( *start ) { \
02888     oldsize = *(x **)stop - *(x **)start; newsize = 2*oldsize; \
02889     t = u = (x *) Malloc1(newsize*sizeof(x), text); s = *(x **)start; \
02890     for ( i = 0; i < oldsize; i++ ) { *t++ = *s++; } M_free(*start, "double"); } \
02891     else { newsize = 100; u = (x *) Malloc1(newsize*sizeof(x), text); } \
02892     *start = (void *)u; *stop = (void *) (u+newsize); }
02893
02894 void DoubleBuffer(void **start, void **stop, int size, char *text)
02895 {
02896     LONG oldsize, newsize, i;
02897     if ( size == sizeof(char) ) DODOUBLE(char)
02898     else if ( size == sizeof(short) ) DODOUBLE(short)
02899     else if ( size == sizeof(int) ) DODOUBLE(int)
02900     else if ( size == sizeof(LONG) ) DODOUBLE(LONG)
02901     else if ( size % sizeof(int) == 0 ) DODOUBLE(int)
02902     else {
02903         MesPrint("---Cannot handle doubling buffers of size %d", size);
02904         Terminate(-1);
02905     }
02906 }
02907
02908 /*
02909     #] DoubleBuffer :
02910     #[ ExpandBuffer :
02911 */
02912
02913 #define DOEXPAND(x) { x *newbuffer, *t, *m; \
02914     t = newbuffer = (x *) Malloc1((newsize+2)*type, "ExpandBuffer"); \
02915     if ( *buffer ) { m = (x *) *buffer; i = *oldsize; \

```

```

02916         while ( --i >= 0 ) { *t++ = *m++; } M_free(*buffer, "ExpandBuffer"); \
02917     } *buffer = newbuffer; *oldsize = newsize; }
02918
02919 void ExpandBuffer(void **buffer, LONG *oldsize, int type)
02920 {
02921     LONG newsize, i;
02922     if ( *oldsize <= 0 ) { newsize = 100; }
02923     else newsize = 2*( *oldsize );
02924     if ( type == sizeof(char) ) DOEXPAND(char)
02925     else if ( type == sizeof(short) ) DOEXPAND(short)
02926     else if ( type == sizeof(int) ) DOEXPAND(int)
02927     else if ( type == sizeof(LONG) ) DOEXPAND(LONG)
02928     else if ( type == sizeof(POSITION) ) DOEXPAND(POSITION)
02929     else {
02930         MesPrint("---Cannot handle expanding buffers with objects of size %d", type);
02931         Terminate(-1);
02932     }
02933 }
02934
02935 /*
02936     #] ExpandBuffer :
02937     #[ iexp :
02938
02939     Raises the long integer y to the power p.
02940     Returnvalue is long, regardless of overflow.
02941 */
02942
02943 LONG iexp(LONG x, int p)
02944 {
02945     int sign;
02946     ULONG y;
02947     ULONG ux;
02948     if ( x == 0 ) return(0);
02949     if ( p == 0 ) return(1);
02950     sign = x < 0 ? -1 : 1;
02951     if ( sign < 0 && ( p & 1 ) == 0 ) sign = 1;
02952     ux = LongAbs(x);
02953     if ( ux == 1 ) return(sign);
02954     if ( p < 0 ) return(0);
02955     y = 1;
02956     while ( p ) {
02957         if ( ( p & 1 ) != 0 ) y *= ux;
02958         p >>= 1;
02959         ux = ux*ux;
02960     }
02961     if ( sign < 0 ) y = -y;
02962     return ULONGToLong(y);
02963 }
02964
02965 /*
02966     #] iexp :
02967     #[ ToGeneral :
02968
02969     Convert a fast argument to a general argument
02970     Input in r, output in m.
02971     If par == 0 we need the argument header also.
02972 */
02973
02974 void ToGeneral(WORD *r, WORD *m, WORD par)
02975 {
02976     WORD *mm = m, j, k;
02977     if ( par ) m++;
02978     else { m[1] = 0; m += ARGHEAD + 1; }
02979     j = -*r++;
02980     k = 3;
02981     /* JV: Bugfix 1-feb-2016. Old code assumed FUNHEAD to be 2 */
02982     if ( j >= FUNCTION ) { *m++ = j; *m++ = FUNHEAD; FILLFUN(m) }
02983     else {
02984         switch ( j ) {
02985             case SYMBOL: *m++ = j; *m++ = 4; *m++ = *r++; *m++ = 1; break;
02986             case SNUMBER:
02987                 if ( *r > 0 ) { *m++ = *r; *m++ = 1; *m++ = 3; }
02988                 else if ( *r == 0 ) { m--; }
02989                 else { *m++ = -*r; *m++ = 1; *m++ = -3; }
02990                 goto MakeSize;
02991             case MINVECTOR:
02992                 k = -k;
02993                 /* fall through */
02994             case INDEX:
02995             case VECTOR:
02996                 *m++ = INDEX; *m++ = 3; *m++ = *r++;
02997                 break;
02998         }
02999     }
03000     *m++ = 1; *m++ = 1; *m++ = k;
03001 MakeSize:
03002     *mm = m-mm;

```

```

03003     if ( !par ) mm[ARGHEAD] = *mm-ARGHEAD;
03004 }
03005
03006 /*
03007     #] ToGeneral :
03008     #[ ToFast :
03009
03010     Checks whether an argument can be converted to fast notation
03011     If this can be done it does it.
03012     Important: m should be allowed to be equal to r!
03013     Return value is 1 if conversion took place.
03014     If there was conversion the answer is in m.
03015     If there was no conversion m hasn't been touched.
03016 */
03017
03018 int ToFast(WORD *r, WORD *m)
03019 {
03020     WORD i;
03021     if ( *r == ARGHEAD ) { *m++ = -SNUMBER; *m++ = 0; return(1); }
03022     if ( *r != r[ARGHEAD]+ARGHEAD ) return(0); /* > 1 term */
03023     r += ARGHEAD;
03024     if ( *r == 4 ) {
03025         if ( r[2] != 1 || r[1] <= 0 ) return(0);
03026         *m++ = -SNUMBER; *m = ( r[3] < 0 ) ? -r[1] : r[1]; return(1);
03027     }
03028     i = *r - 1;
03029     if ( r[i-1] != 1 || r[i-2] != 1 ) return(0);
03030     if ( r[i] != 3 ) {
03031         if ( r[i] == -3 && r[2] == *r-4 && r[2] == 3 && r[1] == INDEX
03032             && r[3] < MINSPEC ) {}
03033         else return(0);
03034     }
03035     else if ( r[2] != *r - 4 ) return(0);
03036     r++;
03037     if ( *r >= FUNCTION ) {
03038         if ( r[1] <= FUNHEAD ) { *m++ = -*r; return(1); }
03039     }
03040     else if ( *r == SYMBOL ) {
03041         if ( r[1] == 4 && r[3] == 1 )
03042             { *m++ = -SYMBOL; *m++ = r[2]; return(1); }
03043     }
03044     else if ( *r == INDEX ) {
03045         if ( r[1] == 3 ) {
03046             if ( r[2] >= MINSPEC ) {
03047                 if ( r[2] >= 0 && r[2] < AM.OffsetIndex ) *m++ = -SNUMBER;
03048                 else *m++ = -INDEX;
03049             }
03050             else {
03051                 if ( r[5] == -3 ) *m++ = -MINVECTOR;
03052                 else *m++ = -VECTOR;
03053             }
03054             *m++ = r[2];
03055             return(1);
03056         }
03057     }
03058     return(0);
03059 }
03060
03061 /*
03062     #] ToFast :
03063     #[ ToPolyFunGeneral :
03064
03065     Routine forces a polyratfun into general notation if needed.
03066     If no action was needed, the return value is zero.
03067     A positive return value indicates how many arguments were converted.
03068     The new term overwrite the old.
03069 */
03070
03071 WORD ToPolyFunGeneral(PHEAD WORD *term)
03072 {
03073     WORD *t = term+1, *tt, *to, *tol, *termout, *tstop, *tnext;
03074     WORD numarg, i, change = 0;
03075     tstop = term + *term; tstop -= ABS(tstop[-1]);
03076     termout = to = AT.WorkPointer;
03077     to++;
03078     while ( t < tstop ) { /* go through the subterms */
03079         if ( *t == AR.PolyFun ) {
03080             tt = t+FUNHEAD; tnext = t + t[1];
03081             numarg = 0;
03082             while ( tt < tnext ) { numarg++; NEXTARG(tt); }
03083             if ( numarg == 2 ) { /* this needs attention */
03084                 tt = t + FUNHEAD;
03085                 tol = to;
03086                 i = FUNHEAD; NCOPY(to,t,i);
03087                 while ( tt < tnext ) { /* Do the arguments */
03088                     if ( *tt > 0 ) {
03089                         i = *tt; NCOPY(to,tt,i);

```

```

03090     }
03091     else if ( *tt == -SYMBOL ) {
03092         to1[1] += 6+ARGHEAD; to1[2] |= MUSTCLEANPRF; change++;
03093         *to++ = 8+ARGHEAD; *to++ = 0; FILLARG(to);
03094         *to++ = 8; *to++ = SYMBOL; *to++ = 4; *to++ = tt[1];
03095         *to++ = 1; *to++ = 1; *to++ = 1; *to++ = 3;
03096         tt += 2;
03097     }
03098     else if ( *tt == -SNUMBER ) {
03099         if ( tt[1] > 0 ) {
03100             to1[1] += 2+ARGHEAD; to1[2] |= MUSTCLEANPRF; change++;
03101             *to++ = 4+ARGHEAD; *to++ = 0; FILLARG(to);
03102             *to++ = 4; *to++ = tt[1]; *to++ = 1; *to++ = 3;
03103             tt += 2;
03104         }
03105         else if ( tt[1] < 0 ) {
03106             to1[1] += 2+ARGHEAD; to1[2] |= MUSTCLEANPRF; change++;
03107             *to++ = 4+ARGHEAD; *to++ = 0; FILLARG(to);
03108             *to++ = 4; *to++ = -tt[1]; *to++ = 1; *to++ = -3;
03109             tt += 2;
03110         }
03111         else {
03112             MLOCK(ErrorMessageLock);
03113             MesPrint("Internal error: Zero in PolyRatFun");
03114             MUNLOCK(ErrorMessageLock);
03115             Terminate(-1);
03116         }
03117     }
03118     }
03119     t = tnext;
03120     continue;
03121 }
03122 }
03123 i = t[1]; NCOPY(to,t,i)
03124 }
03125 if ( change ) {
03126     tt = term + *term;
03127     while ( t < tt ) *to++ = *t++;
03128     *termout = to - termout;
03129     t = term; i = *termout; tt = termout;
03130     NCOPY(t,tt,i)
03131     AT.WorkPointer = term + *term;
03132 }
03133 return(change);
03134 }
03135
03136 /*
03137 #] ToPolyFunGeneral :
03138 #[ IsLikeVector :
03139
03140 Routine determines whether a function argument is like a vector.
03141 Returnvalue: 1: is vector or index
03142              0: is not vector or index
03143             -1: may be an index
03144 */
03145 int IsLikeVector(WORD *arg)
03146 {
03147     WORD *sstop, *t, *tstop;
03148     if ( *arg < 0 ) {
03149         if ( *arg == -VECTOR || *arg == -INDEX ) return(1);
03150         if ( *arg == -SNUMBER && arg[1] >= 0 && arg[1] < AM.OffsetIndex )
03151             return(-1);
03152         return(0);
03153     }
03154     sstop = arg + *arg; arg += ARGHEAD;
03155     while ( arg < sstop ) {
03156         t = arg + *arg;
03157         tstop = t - ABS(t[-1]);
03158         arg++;
03159         while ( arg < tstop ) {
03160             if ( *arg == INDEX ) return(1);
03161             arg += arg[1];
03162         }
03163         arg = t;
03164     }
03165     return(0);
03166 }
03167 }
03168
03169 /*
03170 #] IsLikeVector :
03171 #[ AreArgsEqual :
03172 */
03173 int AreArgsEqual(WORD *arg1, WORD *arg2)
03174 {
03175     int i;
03176 
```

```

03177     if ( *arg2 != *arg1 ) return(0);
03178     if ( *arg1 > 0 ) {
03179         i = *arg1;
03180         while ( --i > 0 ) { if ( arg1[i] != arg2[i] ) return(0); }
03181         return(1);
03182     }
03183     else if ( *arg1 <= -FUNCTION ) return(1);
03184     else if ( arg1[1] == arg2[1] ) return(1);
03185     return(0);
03186 }
03187
03188 /*
03189     #] AreArgsEqual :
03190     #[ CompareArgs :
03191 */
03192
03193 int CompareArgs(WORD *arg1, WORD *arg2)
03194 {
03195     int i1,i2;
03196     if ( *arg1 > 0 ) {
03197         if ( *arg2 < 0 ) return(-1);
03198         i1 = *arg1-ARGHEAD; arg1 += ARGHEAD;
03199         i2 = *arg2-ARGHEAD; arg2 += ARGHEAD;
03200         while ( i1 > 0 && i2 > 0 ) {
03201             if ( *arg1 != *arg2 ) return((int) (*arg1)-(int) (*arg2));
03202             i1--; i2--; arg1++; arg2++;
03203         }
03204         return(i1-i2);
03205     }
03206     else if ( *arg2 > 0 ) return(1);
03207     else {
03208         if ( *arg1 != *arg2 ) {
03209             if ( *arg1 < *arg2 ) return(-1);
03210             else return(1);
03211         }
03212         if ( *arg1 <= -FUNCTION ) return(0);
03213         return((int) (arg1[1])-(int) (arg2[1]));
03214     }
03215 }
03216
03217 /*
03218     #] CompareArgs :
03219     #[ CompArg :
03220
03221     returns 1 if arg1 comes first, -1 if arg2 comes first, 0 if equal
03222 */
03223
03224 int CompArg(WORD *s1, WORD *s2)
03225 {
03226     GETIDENTITY
03227     WORD *st1, *st2, x[7];
03228     int k;
03229     if ( *s1 < 0 ) {
03230         if ( *s2 < 0 ) {
03231             if ( *s1 <= -FUNCTION && *s2 <= -FUNCTION ) {
03232                 if ( *s1 > *s2 ) return(-1);
03233                 if ( *s1 < *s2 ) return(1);
03234                 return(0);
03235             }
03236             if ( *s1 > *s2 ) return(1);
03237             if ( *s1 < *s2 ) return(-1);
03238             if ( *s1 <= -FUNCTION ) return(0);
03239             s1++; s2++;
03240             if ( *s1 > *s2 ) return(1);
03241             if ( *s1 < *s2 ) return(-1);
03242             return(0);
03243         }
03244         x[1] = AT.comsym[3];
03245         x[2] = AT.comnum[1];
03246         x[3] = AT.comnum[3];
03247         x[4] = AT.comind[3];
03248         x[5] = AT.comind[6];
03249         x[6] = AT.comfun[1];
03250         if ( *s1 == -SYMBOL ) {
03251             AT.comsym[3] = s1[1];
03252             st1 = AT.comsym+8; s1 = AT.comsym;
03253         }
03254         else if ( *s1 == -SNUMBER ) {
03255             if ( s1[1] < 0 ) {
03256                 AT.comnum[1] = -s1[1]; AT.comnum[3] = -3;
03257             }
03258             else {
03259                 AT.comnum[1] = s1[1]; AT.comnum[3] = 3;
03260             }
03261             st1 = AT.comnum+4;
03262             s1 = AT.comnum;
03263         }
03264     }

```

```

03264     else if ( *s1 == -INDEX || *s1 == -VECTOR ) {
03265         AT.comind[3] = s1[1]; AT.comind[6] = 3;
03266         st1 = AT.comind+7; s1 = AT.comind;
03267     }
03268     else if ( *s1 == -MINVECTOR ) {
03269         AT.comind[3] = s1[1]; AT.comind[6] = -3;
03270         st1 = AT.comind+7; s1 = AT.comind;
03271     }
03272     else if ( *s1 <= -FUNCTION ) {
03273         AT.comfun[1] = -*s1;
03274         st1 = AT.comfun+FUNHEAD+4; s1 = AT.comfun;
03275     }
03276 /*
03277     Symmetrize during compilation of id statement when properorder
03278     needs this one. Code added 10-nov-2001
03279 */
03280     else if ( *s1 == -ARGWILD ) {
03281         return(-1);
03282     }
03283     else { goto argerror; }
03284     st2 = s2 + *s2; s2 += ARGHEAD;
03285     goto docompare;
03286 }
03287 else if ( *s2 < 0 ) {
03288     x[1] = AT.comsym[3];
03289     x[2] = AT.comnum[1];
03290     x[3] = AT.comnum[3];
03291     x[4] = AT.comind[3];
03292     x[5] = AT.comind[6];
03293     x[6] = AT.comfun[1];
03294     if ( *s2 == -SYMBOL ) {
03295         AT.comsym[3] = s2[1];
03296         st2 = AT.comsym+8; s2 = AT.comsym;
03297     }
03298     else if ( *s2 == -SNUMBER ) {
03299         if ( s2[1] < 0 ) {
03300             AT.comnum[1] = -s2[1]; AT.comnum[3] = -3;
03301             st2 = AT.comnum+4;
03302         }
03303         else if ( s2[1] == 0 ) {
03304             st2 = AT.comnum+4; s2 = st2;
03305         }
03306         else {
03307             AT.comnum[1] = s2[1]; AT.comnum[3] = 3;
03308             st2 = AT.comnum+4;
03309         }
03310         s2 = AT.comnum;
03311     }
03312     else if ( *s2 == -INDEX || *s2 == -VECTOR ) {
03313         AT.comind[3] = s2[1]; AT.comind[6] = 3;
03314         st2 = AT.comind+7; s2 = AT.comind;
03315     }
03316     else if ( *s2 == -MINVECTOR ) {
03317         AT.comind[3] = s2[1]; AT.comind[6] = -3;
03318         st2 = AT.comind+7; s2 = AT.comind;
03319     }
03320     else if ( *s2 <= -FUNCTION ) {
03321         AT.comfun[1] = -*s2;
03322         st2 = AT.comfun+FUNHEAD+4; s2 = AT.comfun;
03323     }
03324 /*
03325     Symmetrize during compilation of id statement when properorder
03326     needs this one. Code added 10-nov-2001
03327 */
03328     else if ( *s2 == -ARGWILD ) {
03329         return(1);
03330     }
03331     else { goto argerror; }
03332     st1 = s1 + *s1; s1 += ARGHEAD;
03333     goto docompare;
03334 }
03335 else {
03336     x[1] = AT.comsym[3];
03337     x[2] = AT.comnum[1];
03338     x[3] = AT.comnum[3];
03339     x[4] = AT.comind[3];
03340     x[5] = AT.comind[6];
03341     x[6] = AT.comfun[1];
03342     st1 = s1 + *s1; st2 = s2 + *s2;
03343     s1 += ARGHEAD; s2 += ARGHEAD;
03344 docompare:
03345     while ( s1 < st1 && s2 < st2 ) {
03346         if ( ( k = CompareTerms(BHEAD s1,s2,(WORD)2) ) != 0 ) {
03347             AT.comsym[3] = x[1];
03348             AT.comnum[1] = x[2];
03349             AT.comnum[3] = x[3];
03350             AT.comind[3] = x[4];

```



```

03351             AT.comind[6] = x[5];
03352             AT.comfun[1] = x[6];
03353             return(-k);
03354         }
03355         s1 += *s1; s2 += *s2;
03356     }
03357     AT.comsym[3] = x[1];
03358     AT.comnum[1] = x[2];
03359     AT.comnum[3] = x[3];
03360     AT.comind[3] = x[4];
03361     AT.comind[6] = x[5];
03362     AT.comfun[1] = x[6];
03363     if ( s1 < st1 ) return(1);
03364     if ( s2 < st2 ) return(-1);
03365 }
03366 return(0);
03367
03368 argerror:
03369     MesPrint("Illegal type of short function argument in Normalize");
03370     Terminate(-1); return(0);
03371 }
03372
03373 /*
03374     #] CompArg :
03375     #[ TimeWallClock :
03376 */
03377
03378 #ifdef HAVE_CLOCK_GETTIME
03379 #include <time.h> /* for clock_gettime() */
03380 #else
03381 #ifdef HAVE_GETTIMEOFDAY
03382 #include <sys/time.h> /* for gettimeofday() */
03383 #else
03384 #include <sys/timeb.h> /* for ftime() */
03385 #endif
03386 #endif
03387
03394 LONG TimeWallClock(WORD par)
03395 {
03396     /*
03397      * NOTE: this function is not thread-safe. Operations on tp are not atomic.
03398      */
03399
03400 #ifdef HAVE_CLOCK_GETTIME
03401     struct timespec ts;
03402     clock_gettime(CLOCK_MONOTONIC, &ts);
03403
03404     if ( par ) {
03405         return(((LONG)(ts.tv_sec)-AM.OldSecTime)*100 +
03406             ((LONG)(ts.tv_nsec / 1000000)-AM.OldMilliTime)/10);
03407     }
03408     else {
03409         AM.OldSecTime = (LONG)(ts.tv_sec);
03410         AM.OldMilliTime = (LONG)(ts.tv_nsec / 1000000);
03411         return(0L);
03412     }
03413 #else
03414 #ifdef HAVE_GETTIMEOFDAY
03415     struct timeval t;
03416     LONG sec, msec;
03417     gettimeofday(&t, NULL);
03418     sec = (LONG)t.tv_sec;
03419     msec = (LONG)(t.tv_usec/1000);
03420     if ( par ) {
03421         return (sec-AM.OldSecTime)*100 + (msec-AM.OldMilliTime)/10;
03422     }
03423     else {
03424         AM.OldSecTime = sec;
03425         AM.OldMilliTime = msec;
03426         return(0L);
03427     }
03428 #else
03429     struct timeb tp;
03430     ftime(&tp);
03431
03432     if ( par ) {
03433         return(((LONG)(tp.time)-AM.OldSecTime)*100 +
03434             ((LONG)(tp.millitm)-AM.OldMilliTime)/10);
03435     }
03436     else {
03437         AM.OldSecTime = (LONG)(tp.time);
03438         AM.OldMilliTime = (LONG)(tp.millitm);
03439         return(0L);
03440     }
03441 #endif
03442 #endif
03443 }

```

```

03444
03445 /*
03446     #] TimeWallClock :
03447     #[ TimeChildren :
03448 */
03449
03450 LONG TimeChildren(WORD par)
03451 {
03452     if ( par ) return(Timer(1)-AM.OldChildTime);
03453     AM.OldChildTime = Timer(1);
03454     return(0L);
03455 }
03456
03457 /*
03458     #] TimeChildren :
03459     #[ TimeCPU :
03460 */
03461
03462 LONG TimeCPU(WORD par)
03463 {
03464     GETIDENTITY
03465     if ( par ) return(Timer(0)-AR.OldTime);
03466     AR.OldTime = Timer(0);
03467     return(0L);
03468 }
03469
03470 /*
03471     #] TimeCPU :
03472     #[ Timer :
03473 */
03474
03475 #if defined(WINDOWS)
03476 LONG Timer(int par)
03477 {
03478     #ifndef WITHPTHREADS
03479         static int initialized = 0;
03480         static HANDLE hProcess;
03481         FILETIME ftCreate, ftExit, ftKernel, ftUser;
03482         DUMMYUSE(par);
03483
03484         if ( !initialized ) {
03485             hProcess = OpenProcess(PROCESS_QUERY_INFORMATION, FALSE, GetCurrentProcessId());
03486         }
03487         if ( GetProcessTimes(hProcess, &ftCreate, &ftExit, &ftKernel, &ftUser) ) {
03488             PFILETIME pftKernel = &ftKernel; /* to avoid strict-aliasing rule warnings */
03489             PFILETIME pftUser = &ftUser;
03490             __int64 t = *(__int64 *)pftKernel + *(__int64 *)pftUser; /* in 100 nsec. */
03491             return (LONG)(t / 10000); /* in msec. */
03492         }
03493         return 0;
03494     #else
03495         LONG lResult = 0;
03496         HANDLE hThread;
03497         FILETIME ftCreate, ftExit, ftKernel, ftUser;
03498         DUMMYUSE(par);
03499
03500         hThread = OpenThread(THREAD_QUERY_INFORMATION, FALSE, GetCurrentThreadId());
03501         if ( hThread ) {
03502             if ( GetThreadTimes(hThread, &ftCreate, &ftExit, &ftKernel, &ftUser) ) {
03503                 PFILETIME pftKernel = &ftKernel; /* to avoid strict-aliasing rule warnings */
03504                 PFILETIME pftUser = &ftUser;
03505                 __int64 t = *(__int64 *)pftKernel + *(__int64 *)pftUser; /* in 100 nsec. */
03506                 lResult = (LONG)(t / 10000); /* in msec. */
03507             }
03508             CloseHandle(hThread);
03509         }
03510         return lResult;
03511     #endif
03512 }
03513
03514 #elif defined(UNIX)
03515 #include <sys/time.h>
03516 #include <sys/resource.h>
03517 #ifdef WITHPOSIXCLOCK
03518 #include <time.h>
03519 /*
03520     And include -lrt in the link statement (on blade02)
03521 */
03522 #endif
03523
03524 LONG Timer(int par)
03525 {
03526     #ifdef WITHPOSIXCLOCK
03527         /*
03528             Only to be used in combination with WITHPTHREADS
03529             This clock seems to be supported by the standard.
03530             The getrusage clock returns according to the standard only the combined

```

```

03537     time of the whole process. But in older versions of Linux LinuxThreads
03538     is used which gives a separate id to each thread and individual timings.
03539     In NPTL we get, according to the standard, one combined timing.
03540     To get individual timings we need to use
03541         clock_gettime(CLOCK_THREAD_CPUTIME_ID, &timing)
03542     with timing of the time
03543     struct timespec {
03544         time_t tv_sec;           Seconds.
03545         long tv_nsec;           Nanoseconds.
03546     };
03547
03548 */
03549 struct timespec t;
03550 if ( par == 0 ) {
03551     if ( clock_gettime(CLOCK_THREAD_CPUTIME_ID, &t) ) {
03552         MesPrint("Error in getting timing information");
03553     }
03554     return (LONG)t.tv_sec * 1000 + (LONG)t.tv_nsec / 1000000;
03555 }
03556 return(0);
03557 #else
03558 struct rusage rusage;
03559 if ( par == 1 ) {
03560     getrusage(RUSAGE_CHILDREN, &rusage);
03561     return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03562            +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03563 }
03564 else {
03565     getrusage(RUSAGE_SELF, &rusage);
03566     return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03567            +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03568 }
03569 #endif
03570 }
03571
03572 #elif defined(SUN)
03573 #define _TIME_T_
03574 #include <sys/time.h>
03575 #include <sys/resource.h>
03576
03577 LONG Timer(int par)
03578 {
03579     struct rusage rusage;
03580     if ( par == 1 ) {
03581         getrusage(RUSAGE_CHILDREN, &rusage);
03582         return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03583                +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03584     }
03585     else {
03586         getrusage(RUSAGE_SELF, &rusage);
03587         return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03588                +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03589     }
03590 }
03591
03592 #elif defined(RS6K)
03593 #include <sys/time.h>
03594 #include <sys/resource.h>
03595
03596 LONG Timer(int par)
03597 {
03598     struct rusage rusage;
03599     if ( par == 1 ) {
03600         getrusage(RUSAGE_CHILDREN, &rusage);
03601         return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03602                +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03603     }
03604     else {
03605         getrusage(RUSAGE_SELF, &rusage);
03606         return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03607                +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03608     }
03609 }
03610
03611 #elif defined(ANSI)
03612 LONG Timer(int par)
03613 {
03614     #ifdef ALPHA
03615     /* clock_t t, tikken = clock(); */
03616     /* MesPrint("ALPHA-clock = %l", (LONG)tikken); */
03617     /* t = tikken % CLOCKS_PER_SEC; */
03618     /* tikken /= CLOCKS_PER_SEC; */
03619     /* tikken *= 1000; */
03620     /* tikken += (t*1000)/CLOCKS_PER_SEC; */
03621     /* return((LONG)tikken); */
03622     /* #define _TIME_T_ */
03623     #include <sys/time.h>

```

```

03624 #include <sys/resource.h>
03625 struct rusage rusage;
03626 if ( par == 1 ) {
03627     getrusage(RUSAGE_CHILDREN,&rusage);
03628     return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03629         +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03630 }
03631 else {
03632     getrusage(RUSAGE_SELF,&rusage);
03633     return(((LONG)(rusage.ru_utime.tv_sec)+(LONG)(rusage.ru_stime.tv_sec))*1000
03634         +(rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03635 }
03636 #else
03637 #ifdef DEC_STATION
03638     clock_t tikken = clock();
03639     return((LONG)tikken/1000);
03640 #else
03641     clock_t t, tikken = clock();
03642     t = tikken % CLK_TCK;
03643     tikken /= CLK_TCK;
03644     tikken *= 1000;
03645     tikken += (t*1000)/CLK_TCK;
03646     return(tikken);
03647 #endif
03648 #endif
03649 }
03650 #elif defined(VMS)
03651
03652 #include <time.h>
03653 void times(tbuffer_t *buffer);
03654
03655 LONG
03656 Timer(int par)
03657 {
03658     tbuffer_t buffer;
03659     if ( par == 1 ) { return(0); }
03660     else {
03661         times(&buffer);
03662         return(buffer.proc_user_time * 10);
03663     }
03664 }
03665
03666 #elif defined(mBSD)
03667 #ifdef MICROTIME
03668 /*
03669     There is only a CP time clock in microseconds here
03670     This can cause problems with AO.wrap around
03671 */
03672 #else
03673 #ifdef mBSD2
03674 #include <sys/types.h>
03675 #include <sys/times.h>
03676 #include <time.h>
03677 LONG pretime = 0;
03678 #else
03679 #define _TIME_T_
03680 #include <sys/time.h>
03681 #include <sys/resource.h>
03682 #endif
03683 #endif
03684
03685 LONG Timer(int par)
03686 {
03687     #ifdef MICROTIME
03688         LONG t;
03689         if ( par == 1 ) { return(0); }
03690         t = clock();
03691         if ( ( AO.wrapnum & 1 ) != 0 ) t ^= 0x80000000;
03692         if ( t < 0 ) {
03693             t ^= 0x80000000;
03694             warpnum++;
03695             AO.wrap += 2147584;
03696         }
03697         return(AO.wrap+(t/1000));
03698     #else
03699     #ifdef mBSD2
03700         struct tms buffer;
03701         LONG ret;
03702         ULONG a1, a2, a3, a4;
03703         if ( par == 1 ) { return(0); }
03704         times(&buffer);
03705         a1 = (ULONG)buffer.tms_utime;
03706         a2 = a1 » 16;
03707         a3 = a1 & 0xFFFFL;
03708         a3 *= 1000;
03709         a2 = 1000*a2 + (a3 » 16);

```

```

03711     a3 &= 0xFFFFL;
03712     a4 = a2/CLK_TCK;
03713     a2 %= CLK_TCK;
03714     a3 += a2 << 16;
03715     ret = (LONG)((a4 << 16) + a3 / CLK_TCK);
03716     /* ret = ((LONG)buffer.tms_ftime * 1000)/CLK_TCK; */
03717     return(ret);
03718 #else
03719 #ifdef REALTIME
03720     struct timeval tp;
03721     struct timezone tzp;
03722     if ( par == 1 ) { return(0); }
03723     gettimeofday(&tp,&tzp); /*
03724     return(tp.tv_sec*1000+tp.tv_usec/1000);
03725 #else
03726     struct rusage rusage;
03727     if ( par == 1 ) {
03728         getrusage(RUSAGE_CHILDREN,&rusage);
03729         return((rusage.ru_utime.tv_sec+rusage.ru_stime.tv_sec)*1000
03730             + (rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03731     }
03732     else {
03733         getrusage(RUSAGE_SELF,&rusage);
03734         return((rusage.ru_utime.tv_sec+rusage.ru_stime.tv_sec)*1000
03735             + (rusage.ru_utime.tv_usec/1000+rusage.ru_stime.tv_usec/1000));
03736     }
03737 #endif
03738 #endif
03739 #endif
03740 }
03741
03742 #endif
03743
03744 /*
03745     #] Timer :
03746     #[ Crash :
03747
03748     Routine for debugging purposes
03749 */
03750
03751 int Crash(void)
03752 {
03753     int retval;
03754     #ifdef DEBUGGING
03755     int *zero = 0;
03756     retval = *zero;
03757 #else
03758     retval = 0;
03759 #endif
03760     return(retval);
03761 }
03762
03763 /*
03764     #] Crash :
03765     #[ TestTerm :
03766 */
03767
03779 int TestTerm(WORD *term)
03780 {
03781     int errorcode = 0, coeffsize;
03782     WORD *t, *tt, *tstop, *endterm, *targ, *targstop, *funstop, *argterm;
03783     endterm = term + *term;
03784     coeffsize = ABS(endterm[-1]);
03785     if ( coeffsize >= *term ) {
03786         MLOCK(ErrorMessageLock);
03787         MesPrint("TestTerm: Internal inconsistency in term. Coefficient too big.");
03788         MUNLOCK(ErrorMessageLock);
03789         errorcode = 1;
03790         goto finish;
03791     }
03792     if ( ( coeffsize < 3 ) || ( ( coeffsize & 1 ) != 1 ) ) {
03793         MLOCK(ErrorMessageLock);
03794         MesPrint("TestTerm: Internal inconsistency in term. Wrong size coefficient.");
03795         MUNLOCK(ErrorMessageLock);
03796         errorcode = 2;
03797         goto finish;
03798     }
03799     t = term+1;
03800     tstop = endterm - coeffsize;
03801     while ( t < tstop ) {
03802         switch ( *t ) {
03803             case SYMBOL:
03804             case DOTPRODUCT:
03805             case INDEX:
03806             case VECTOR:
03807             case DELTA:
03808             case HAAKJE:

```

```

03809         break;
03810     case SNUMBER:
03811     case LNUMBER:
03812         MLOCK(ErrorMessageLock);
03813         MesPrint("TestTerm: Internal inconsistency in term. L or S number");
03814         MUNLOCK(ErrorMessageLock);
03815         errorcode = 3;
03816         goto finish;
03817         break;
03818     case EXPRESSION:
03819     case SUBEXPRESSION:
03820     case DOLLAREXPRESSION:
03821     /*
03822         MLOCK(ErrorMessageLock);
03823         MesPrint("TestTerm: Internal inconsistency in term. Expression survives.");
03824         MUNLOCK(ErrorMessageLock);
03825         errorcode = 4;
03826         goto finish;
03827     */
03828         break;
03829     case SETSET:
03830     case MINVECTOR:
03831     case SETEXP:
03832     case ARGFIELD:
03833         MLOCK(ErrorMessageLock);
03834         MesPrint("TestTerm: Internal inconsistency in term. Illegal subterm.");
03835         MUNLOCK(ErrorMessageLock);
03836         errorcode = 5;
03837         goto finish;
03838         break;
03839     case ARGWILD:
03840         break;
03841     default:
03842         if ( *t <= 0 ) {
03843             MLOCK(ErrorMessageLock);
03844             MesPrint("TestTerm: Internal inconsistency in term. Illegal subterm number.");
03845             MUNLOCK(ErrorMessageLock);
03846             errorcode = 6;
03847             goto finish;
03848         }
03849     /*
03850         This is a regular function.
03851     */
03852         if ( *t-FUNCTION >= NumFunctions ) {
03853             MLOCK(ErrorMessageLock);
03854             MesPrint("TestTerm: Internal inconsistency in term. Illegal function number");
03855             MUNLOCK(ErrorMessageLock);
03856             errorcode = 7;
03857             goto finish;
03858         }
03859         funstop = t + t[1];
03860         if ( funstop > tstop ) goto subtermsize;
03861         if ( t[2] != 0 ) {
03862             MLOCK(ErrorMessageLock);
03863             MesPrint("TestTerm: Internal inconsistency in term. Dirty flag nonzero.");
03864             MUNLOCK(ErrorMessageLock);
03865             errorcode = 8;
03866             goto finish;
03867         }
03868         targ = t + FUNHEAD;
03869         if ( targ > funstop ) {
03870             MLOCK(ErrorMessageLock);
03871             MesPrint("TestTerm: Internal inconsistency in term. Illegal function size.");
03872             MUNLOCK(ErrorMessageLock);
03873             errorcode = 9;
03874             goto finish;
03875         }
03876         if ( functions[*t-FUNCTION].spec >= TENSORFUNCTION ) {
03877         }
03878         else {
03879             while ( targ < funstop ) {
03880                 if ( *targ < 0 ) {
03881                     if ( *targ <= -(FUNCTION+NumFunctions) ) {
03882                         MLOCK(ErrorMessageLock);
03883                         MesPrint("TestTerm: Internal inconsistency in term. Illegal function
03884 number in argument.");
03885                         MUNLOCK(ErrorMessageLock);
03886                         errorcode = 10;
03887                         goto finish;
03888                     }
03889                     if ( *targ <= -FUNCTION ) { targ++; }
03890                 }
03891                 else {
03892                     if ( ( *targ != -SYMBOL ) && ( *targ != -VECTOR )
03893                     && ( *targ != -MINVECTOR )
03894                     && ( *targ != -SNUMBER )
03895                     && ( *targ != -ARGWILD )
03896                     && ( *targ != -INDEX ) ) {

```

```

03895             MLOCK(ErrorMessageLock);
03896             MesPrint("TestTerm: Internal inconsistency in term. Illegal object in
argument.");
03897             MUNLOCK(ErrorMessageLock);
03898             errorcode = 11;
03899             goto finish;
03900         }
03901         targ += 2;
03902     }
03903 }
03904 else if ( ( *targ < ARGHEAD ) || ( targ*targ > funstop ) ) {
03905     MLOCK(ErrorMessageLock);
03906     MesPrint("TestTerm: Internal inconsistency in term. Illegal size of
argument.");
03907     MUNLOCK(ErrorMessageLock);
03908     errorcode = 12;
03909     goto finish;
03910 }
03911 else if ( targ[1] != 0 ) {
03912     MLOCK(ErrorMessageLock);
03913     MesPrint("TestTerm: Internal inconsistency in term. Dirty flag in argument.");
03914     MUNLOCK(ErrorMessageLock);
03915     errorcode = 13;
03916     goto finish;
03917 }
03918 else {
03919     targstop = targ + *targ;
03920     argterm = targ + ARGHEAD;
03921     while ( argterm < targstop ) {
03922         if ( ( *argterm < 4 ) || ( argterm + *argterm > targstop ) ) {
03923             MLOCK(ErrorMessageLock);
03924             MesPrint("TestTerm: Internal inconsistency in term. Illegal termsize
in argument.");
03925             MUNLOCK(ErrorMessageLock);
03926             errorcode = 14;
03927             goto finish;
03928         }
03929         if ( TestTerm(argterm) != 0 ) {
03930             MLOCK(ErrorMessageLock);
03931             MesPrint("TestTerm: Internal inconsistency in term. Called from
TestTerm.");
03932             MUNLOCK(ErrorMessageLock);
03933             errorcode = 15;
03934             goto finish;
03935         }
03936         argterm += *argterm;
03937     }
03938     targ = targstop;
03939 }
03940 }
03941 }
03942 break;
03943 }
03944 tt = t + t[1];
03945 if ( tt > tstop ) {
03946     subtermsize:
03947         MLOCK(ErrorMessageLock);
03948         MesPrint("TestTerm: Internal inconsistency in term. Illegal subterm size.");
03949         MUNLOCK(ErrorMessageLock);
03950         errorcode = 100;
03951         goto finish;
03952     }
03953     t = tt;
03954 }
03955 return(errorcode);
03956 finish:
03957 return(errorcode);
03958 }
03959
03960 /*
03961     #] TestTerm :
03962     #[ DistrN :
03963 */
03964
03965 int DistrN(int n, int *cpl, int ncpl, int *scratch)
03966 {
03967     /*
03968     Divides n objects over ncpl bins (cpl), each time returning one
03969     of those distributions until there are no more after which the
03970     routine returns the value zero (otherwise one).
03971     The array scratch (size n) is kept for the intermediate information.
03972     The whole starts with scratch[0] == -2;
03973     */
03974     int i, j;
03975     if ( ncpl == 0 ) {
03976         if ( scratch[0] == -2 ) { scratch[0] = 0; return(1); }
03977         else return(0);

```

```

03978     }
03979     if ( scratch[0] == ncpl-1 ) {
03980         return(0);
03981     }
03982     else if ( scratch[0] == -2 ) {
03983         for ( i = 0; i < n; i++ ) scratch[i] = 0;
03984     }
03985     else {
03986         j = n-1;
03987         while ( j >= 0 ) {
03988             scratch[j]++;
03989             if ( scratch[j] < ncpl ) break;
03990             j--;
03991         }
03992         j++;
03993         while ( j < n ) { scratch[j] = scratch[j-1]; j++; }
03994     }
03995     for ( i = 0; i < ncpl; i++ ) cpl[i] = 0;
03996     for ( i = 0; i < n; i++ ) { cpl[scratch[i]]++; }
03997     return(1);
03998 }
03999
04000 /*
04001     #] DistrN :
04002     #] Mixed :
04003 */


```

4.151 topowrap.cc File Reference

```
#include "form3.h"
```

```
#include "gentopo.h"
```

Include dependency graph for topowrap.cc:

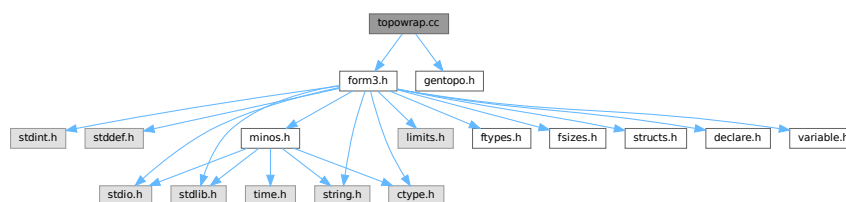

Data Structures

- struct [ToPoTyPe](#)

Macros

- #define [MAXPOINTS](#) 120

Typedefs

- typedef struct [ToPoTyPe](#) **TOPOTYPE**

Functions

- int [GenerateVertices](#) (**TOPOTYPE** *TopoInf, int pointsremaining, int level)
- int [GenerateTopologies](#) (PHEAD WORD nloops, WORD nlegs, WORD setvert, WORD setmax)
- void [toForm](#) (**T_EGraph** *egraph)

4.151.1 Detailed Description

routines for conversion of topology and diagram output to FORM notation

Definition in file [topowrap.cc](#).

4.151.2 Macro Definition Documentation

4.151.2.1 MAXPOINTS

```
#define MAXPOINTS 120
```

Definition at line 44 of file [topowrap.cc](#).

4.151.3 Function Documentation

4.151.3.1 GenerateVertices()

```
int GenerateVertices (
    TOPOTYPE * TopoInf,
    int pointsremaining,
    int level )
```

Definition at line 72 of file [topowrap.cc](#).

4.151.3.2 GenerateTopologies()

```
int GenerateTopologies (
    PHEAD WORD nloops,
    WORD nlegs,
    WORD setvert,
    WORD setmax )
```

Definition at line 123 of file [topowrap.cc](#).

4.151.3.3 toForm()

```
void toForm (
    T_EGraph * egraph )
```

Definition at line 178 of file [topowrap.cc](#).

4.152 topowrap.cc

[Go to the documentation of this file.](#)

```

00001
00006 /* #[ License : */
00007 /*
00008 *   Copyright (C) 1984-2023 J.A.M. Vermaseren
00009 *   When using this file you are requested to refer to the publication
00010 *   J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 *   This is considered a matter of courtesy as the development was paid
00012 *   for by FOM the Dutch physics granting agency and we would like to
00013 *   be able to track its scientific use to convince FOM of its value
00014 *   for the community.
00015 *
00016 *   This file is part of FORM.
00017 *
00018 *   FORM is free software: you can redistribute it and/or modify it under the
00019 *   terms of the GNU General Public License as published by the Free Software
00020 *   Foundation, either version 3 of the License, or (at your option) any later
00021 *   version.
00022 *
00023 *   FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 *   WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 *   FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 *   details.
00027 *
00028 *   You should have received a copy of the GNU General Public License along
00029 *   with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /*
00032     #[ License :
00033     #[ includes :
00034 */
00035
00036 extern "C" {
00037 #include "form3.h"
00038 }
00039
00040 #include "gentopo.h"
00041
00042 //using namespace std;
00043
00044 #define MAXPOINTS 120
00045
00046 typedef struct ToPoTyPe {
00047     int cldeg[MAXPOINTS], cnum[MAXPOINTS], clext[MAXPOINTS];
00048     int ncl, nloops, nlegs, npadding;
00049     WORD *vert;
00050     WORD *vertmax;
00051     WORD nvert;
00052     WORD sopi;
00053 } TOPOTYPE;
00054
00055 /*
00056     #[ includes :
00057     #[ GenerateVertices :
00058
00059     Routine is to be used recursively to work its way through a list
00060     of possible vertices. The array of vertices is in TopoInf->vert
00061     with TopoInf->nvert the number of possible vertices.
00062     Currently we allow in TopoInf->vert only vertices with 3 or more edges.
00063
00064     We work with a point system. Each n-point vertex contributes n-2 points.
00065     When all points are assigned, we can call mgraph->generate().
00066
00067     The number of vertices of a given number of edges is stored in
00068     TopoInf->cnum[..] but the loop that determines how many there are
00069     may be limited by the corresponding element in TopoInf->vertmax[level]
00070 */
00071
00072 int GenerateVertices(TOPOTYPE *TopoInf, int pointsremaining, int level)
00073 {
00074     int i, j;
00075
00076     for ( i = pointsremaining, j = 0; i >= 0; i -= TopoInf->vert[level]-2, j++ ) {
00077         if ( TopoInf->vertmax && TopoInf->vertmax[level] >= 0
00078             && j > TopoInf->vertmax[level] ) break;
00079         if ( i == 0 ) { // We got one!
00080             T_MGraph *mgraph;
00081             TopoInf->cldeg[TopoInf->ncl] = TopoInf->vert[level];
00082             TopoInf->cnum[TopoInf->ncl] = j;
00083             TopoInf->clext[TopoInf->ncl] = 0;
00084             TopoInf->ncl++;
00085
00086             mgraph = new T_MGraph(0, TopoInf->ncl, TopoInf->cldeg,
```

```

00087         TopoInf->clnum, TopoInf->clext, TopoInf->sopi);
00088
00089         mgraph->generate();
00090
00091         delete mgraph;
00092
00093         TopoInf->ncl--;
00094
00095         break;
00096     }
00097     if ( level < TopoInf->nvert-1 ) {
00098         if ( j > 0 ) {
00099             TopoInf->cldeg[TopoInf->ncl] = TopoInf->vert[level];
00100             TopoInf->clnum[TopoInf->ncl] = j;
00101             TopoInf->clext[TopoInf->ncl] = 0;
00102             TopoInf->ncl++;
00103         }
00104         if ( GenerateVertices(TopoInf,i,level+1) < 0 ) return(-1);
00105         if ( j > 0 ) { TopoInf->ncl--; }
00106     }
00107 }
00108 return(0);
00109 }
00110
00111 /*
00112  #] GenerateVertices :
00113  #[ GenerateTopologies :
00114
00115  Note that setmax, option1 and option2 are optional.
00116  Default values are -1,0,0
00117
00118  vert is a pointer to a set of numbers indicating the types of vertices
00119  that are allowed.
00120  nvert is the number of elements in vert.
00121 */
00122
00123 int GenerateTopologies(PHEAD WORD nloops, WORD nlegs, WORD setvert, WORD setmax)
00124 {
00125     TOPOTYPE TopoInf;
00126     int i, points, identical = 0;
00127     DUMMYUSE(AT.nfac);
00128
00129     if ( nlegs == -2 ) {
00130         nlegs = 2;
00131         identical = 1;
00132     }
00133     TopoInf.vert = &(SetElements[Sets[setvert].first]);
00134     TopoInf.nvert = Sets[setvert].last-Sets[setvert].first;
00135
00136     if ( setmax >= 0 ) TopoInf.vertmax = &(SetElements[Sets[setmax].first]);
00137     else TopoInf.vertmax = 0;
00138
00139     // point counting: an n-point vertex counts for n-2 points.
00140
00141     points = 2*nloops-2+nlegs;
00142     if ( points >= MAXPOINTS ) {
00143         MLOCK(ErrorMessageLock);
00144         MesPrint("GenerateTopologies: %d loops and %d legs considered excessive",nloops,nlegs);
00145         MUNLOCK(ErrorMessageLock);
00146         Terminate(-1);
00147     }
00148
00149     // First the external nodes.
00150
00151     for ( i = 0; i < nlegs; i++ ) {
00152         TopoInf.cldeg[i] = 1; TopoInf.clnum[i] = 1; TopoInf.clext[i] = 1;
00153     }
00154     if ( identical == 1 ) { /* Only propagator topologies..... */
00155         nlegs = 1;
00156         TopoInf.clnum[0] = 2;
00157     }
00158     TopoInf.ncl = nlegs;
00159     TopoInf.sopi = 1; // For now
00160     if ( GenerateVertices(&TopoInf,points,0) != 0 ) {
00161         MLOCK(ErrorMessageLock);
00162         MesPrint("Called from GenerateTopologies with %d loops and %d legs considered
00163 excessive",nloops,nlegs);
00164         MUNLOCK(ErrorMessageLock);
00165         Terminate(-1);
00166     }
00167     return(0);
00168 }
00169
00170 /*
00171  #] GenerateTopologies :
00172  #[ toForm :
00173 */

```

```

00173
00174 //=====
00175 // Output for FROM called by genTopo each time a new graph is
00176 // generated
00177 //
00178 void toForm(T_EGraph *egraph)
00179 {
00180     GETIDENTITY;
00181     //
00182     // skipext : boolean; whether to skip external node/line in the output.
00183     //
00184     // const int skipext = 1;
00185
00186     int n, lg, ed, i, fromset;
00187
00188     WORD *termout = AT.WorkPointer;
00189     WORD *t, *tt, *ttstop, *ttend, *ttail;
00190
00191     t = termout+1;
00192
00193     // First pick up part of the original term
00194
00195     tt = AT.TopologiesTerm + 1;
00196     i = AT.TopologiesStart - tt;
00197     NCOPY(t,tt,i)
00198     ttail = tt+tt[1];
00199
00200     // Now the vertices/nodes
00201     // Options are in AT.TopologiesOptions[]
00202
00203     for ( n = 0; n < egraph->nNodes; n++ ) {
00204         if ( ( AT.TopologiesOptions[1] & 1 ) == 1 && egraph->nodes[n].ext ) continue;
00205         tt = t;
00206         *t++ = NODEFUNCTION; t++; FILLFUN(t);
00207         *t++ = -SNUMBER; *t++ = n;
00208         for ( lg = 0; lg < egraph->nodes[n].deg; lg++ ) {
00209             ed = egraph->nodes[n].edges[lg];
00210             if ( ed >= 0 ) { *t++ = -VECTOR; }
00211             else { ed = -ed; *t++ = -MINVECTOR; }
00212
00213             // Now we need to pick up the proper set element.
00214
00215             fromset = egraph->edges[ed].ext ? AT.setexterntopo : AT.setinterntopo;
00216             *t++ = SetElements[Sets[fromset].first+egraph->edges[ed].momn-1];
00217         }
00218         tt[1] = t-tt;
00219     }
00220
00221     if ( ( AT.TopologiesOptions[0] & 1 ) == 1 ) {
00222         // Note that the edges count from 1.
00223         for ( n = 1; n <= egraph->nEdges; n++ ) {
00224             if ( ( AT.TopologiesOptions[1] & 1 ) == 1 && egraph->edges[n].ext ) continue;
00225             tt = t;
00226             *t++ = EDGE; t++; FILLFUN(t);
00227             *t++ = -SNUMBER; *t++ = egraph->edges[n].nodes[0];
00228             *t++ = -SNUMBER; *t++ = egraph->edges[n].nodes[1];
00229             *t++ = -VECTOR;
00230             fromset = egraph->edges[n].ext ? AT.setexterntopo : AT.setinterntopo;
00231             *t++ = SetElements[Sets[fromset].first+egraph->edges[n].momn-1];
00232             tt[1] = t-tt;
00233         }
00234     }
00235
00236     // Now the tail end
00237
00238     ttend = AT.TopologiesTerm; ttend = ttend+ttend[0];
00239     ttstop = ttend - ABS(ttend[-1]);
00240     i = ttstop - ttail;
00241     NCOPY(t,ttail,i)
00242
00243     // Finally the coefficient
00244     // The topological coefficient should be in egraph->wsum, egraph->nwsum
00245     // as a FORM Long number
00246
00247     #ifdef WITHFACTOR
00248     if ( egraph->nwsum == 1 && egraph->wsum[0] == 1 ) {
00249         while ( ttstop < ttend ) *t++ = *ttstop++;
00250     }
00251     else {
00252         WORD newsize;
00253         newsize = ttend[-1];
00254         newsize = REDLENG(newsize);
00255         if ( Divvy(BHEAD (UWORD *)ttstop,&newsize,egraph->wsum,egraph->nwsum) )
00256             goto OnError;
00257         newsize = INCLENG(newsize);
00258         i = ABS(newsize)-1;
00259         NCOPY(t,ttstop,i)

```

```


00260         *t++ = newsize;
00261     }
00262 #else
00263     while (ttstop < ttend) *t++ = *ttstop++;
00264 #endif
00265     *termout = t - termout;
00266     AT.WorkPointer = t;
00267
00268     if ( Generator(BHEAD termout, AT.TopologiesLevel) < 0 ) {
00269 // OnError:
00271         MLOCK(ErrorMessageLock);
00272         MesPrint("Called from the topologies routine toForm");
00273         MUNLOCK(ErrorMessageLock);
00274         Terminate(-1);
00275     }
00276
00277     AT.WorkPointer = termout;
00278 }
00279
00280 /*
00281 #] toForm :
00282 */
00283

```

4.153 transform.c File Reference

```
#include "form3.h"
```

Include dependency graph for transform.c:

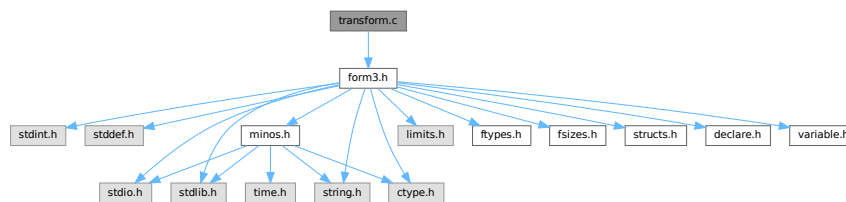

Functions

- int [CoTransform](#) (UBYTE *in)
- int [RunTransform](#) (PHEAD WORD *term, WORD *params)
- int [RunEncode](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunDecode](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunReplace](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunImplode](#) (WORD *fun, WORD *args)
- int [RunExplode](#) (PHEAD WORD *fun, WORD *args)
- int [RunPermute](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunReverse](#) (PHEAD WORD *fun, WORD *args)
- int [RunDedup](#) (PHEAD WORD *fun, WORD *args)
- int [RunCycle](#) (PHEAD WORD *fun, WORD *args, WORD *info)
- int [RunAddArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunMulArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunIsLyndon](#) (PHEAD WORD *fun, WORD *args, int par)
- WORD [RunToLyndon](#) (PHEAD WORD *fun, WORD *args, int par)
- int [RunDropArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunSelectArg](#) (PHEAD WORD *fun, WORD *args)
- int [RunZtoHArg](#) (PHEAD WORD *fun, WORD *args)

- int [RunHtoZArg](#) (PHEAD WORD *fun, WORD *args)
- int [TestArgNum](#) (int n, int totarg, WORD *args)
- WORD [PutArgInScratch](#) (WORD *arg, UWORD *scrat)
- UBYTE * [ReadRange](#) (UBYTE *s, WORD *out, int par)
- int [FindRange](#) (PHEAD WORD *args, WORD *arg1, WORD *arg2, WORD totarg)

4.153.1 Detailed Description

Routines that deal with the transform statement and its varieties.

Definition in file [transform.c](#).

4.153.2 Function Documentation

4.153.2.1 CoTransform()

```
int CoTransform (
    UBYTE * in )
```

Definition at line 87 of file [transform.c](#).

4.153.2.2 RunTransform()

```
int RunTransform (
    PHEAD WORD * term,
    WORD * params )
```

Definition at line 750 of file [transform.c](#).

4.153.2.3 RunEncode()

```
int RunEncode (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info )
```

Definition at line 1006 of file [transform.c](#).

4.153.2.4 RunDecode()

```
int RunDecode (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info )
```

Definition at line 1193 of file [transform.c](#).

4.153.2.5 RunReplace()

```
int RunReplace (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info )
```

Definition at line 1363 of file [transform.c](#).

4.153.2.6 RunImplode()

```
int RunImplode (
    WORD * fun,
    WORD * args )
```

Definition at line 1841 of file [transform.c](#).

4.153.2.7 RunExplode()

```
int RunExplode (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 2042 of file [transform.c](#).

4.153.2.8 RunPermute()

```
int RunPermute (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info )
```

Definition at line 2156 of file [transform.c](#).

4.153.2.9 RunReverse()

```
int RunReverse (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 2383 of file [transform.c](#).

4.153.2.10 RunDedup()

```
int RunDedup (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 2470 of file [transform.c](#).

4.153.2.11 RunCycle()

```
int RunCycle (
    PHEAD WORD * fun,
    WORD * args,
    WORD * info )
```

Definition at line 2559 of file [transform.c](#).

4.153.2.12 RunAddArg()

```
int RunAddArg (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 2711 of file [transform.c](#).

4.153.2.13 RunMulArg()

```
int RunMulArg (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 2800 of file [transform.c](#).

4.153.2.14 RunIsLyndon()

```
int RunIsLyndon (
    PHEAD WORD * fun,
    WORD * args,
    int par )
```

Definition at line 2941 of file [transform.c](#).

4.153.2.15 RunToLyndon()

```
WORD RunToLyndon (
    PHEAD WORD * fun,
    WORD * args,
    int par )
```

Definition at line 3019 of file [transform.c](#).

4.153.2.16 RunDropArg()

```
int RunDropArg (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 3131 of file [transform.c](#).

4.153.2.17 RunSelectArg()

```
int RunSelectArg (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 3157 of file [transform.c](#).

4.153.2.18 RunZtoHArg()

```
int RunZtoHArg (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 3185 of file [transform.c](#).

4.153.2.19 RunHtoZArg()

```
int RunHtoZArg (
    PHEAD WORD * fun,
    WORD * args )
```

Definition at line 3241 of file [transform.c](#).

4.153.2.20 TestArgNum()

```
int TestArgNum (
    int n,
    int totarg,
    WORD * args )
```

Definition at line 3307 of file [transform.c](#).

4.153.2.21 PutArgInScratch()

```
WORD PutArgInScratch (
    WORD * arg,
    UWORD * scrat )
```

Definition at line 3376 of file [transform.c](#).

4.153.2.22 ReadRange()

```
UBYTE * ReadRange (
    UBYTE * s,
    WORD * out,
    int par )
```

Definition at line 3412 of file [transform.c](#).

4.153.2.23 FindRange()

```
int FindRange (
    PHEAD WORD * args,
    WORD * arg1,
    WORD * arg2,
    WORD totarg )
```

Definition at line 3572 of file [transform.c](#).

4.154 transform.c

[Go to the documentation of this file.](#)

```
00001
00005 /* #[] License : */
00006 /*
00007  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008  * When using this file you are requested to refer to the publication
00009  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010  * This is considered a matter of courtesy as the development was paid
00011  * for by FOM the Dutch physics granting agency and we would like to
00012  * be able to track its scientific use to convince FOM of its value
00013  * for the community.
00014  *
00015  * This file is part of FORM.
00016  *
00017  * FORM is free software: you can redistribute it and/or modify it under the
00018  * terms of the GNU General Public License as published by the Free Software
00019  * Foundation, either version 3 of the License, or (at your option) any later
00020  * version.
00021  *
00022  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025  * details.
00026  *
00027  * You should have received a copy of the GNU General Public License along
00028  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029  */
00030 /* #[] License : */
00031 /*
00032  #[] Includes : transform.c
00033  */
00034
00035 #include "form3.h"
00036
00037 /*
00038  #[] Includes :
00039  #[] Transform :
00040  #[] Intro :
00041
00042  Here are the routines for the transform statement. This is a
00043  group of transformations on function arguments or groups of
00044  function arguments. The purpose of this command is that it
00045  avoids repetitive pattern matching.
00046  Syntax:
00047      Transform,SetOfFunctions,OneOrMoreTransformations;
00048  Each transformation is given by
00049      Replace(argfirst,arglast)=(,,)
00050      Encode(argfirst,arglast):base=#
00051      Decode(argfirst,arglast):base=#
00052      Implode(argfirst,arglast)
00053      Explode(argfirst,arglast)
00054      Permute(cycle)(cycle)(cycle)...(cycle)
00055      Reverse(argfirst,arglast)
00056      Dedup(argfirst,arglast)
00057      Cycle(argfirst,arglast)=+/-num
00058      IsLyndon(argfirst,arglast)=(yes,no)
00059      ToLyndon(argfirst,arglast)=(yes,no)
00060  In replace the extra information is
00061      a replace_() without the name of the replace_ function.
00062      This can be as in (0,1,1,0) or (xarg_,1-xarg_) to indicate
00063      a symbolic argument or (x,y,y,x) to exchange x and y, etc.
00064  In Encode and Decode argfirst is the most significant 'word' and
00065  arglast is the least significant 'word'.
00066  Note that we need to introduce the generic symbolic arguments xarg_,
```

```

00067     parg_, iarg_ and farg_.
00068     Examples:
00069         Transform,{H,E}
00070             ,Replace(1:'WEIGHT')=(0,1,1,0)
00071             ,Encode(1:'WEIGHT')=base(2);
00072         Transform,{H,E}
00073             ,Decode(1:'WEIGHT')=base(3)
00074             ,Replace(1:'WEIGHT')=(2,-1,1,0,0,1);
00075     Others that can be added:
00076         symmetrize?
00077
00078     6-may-2016: Changed MAXPOSITIVE2 into MAXPOSITIVE4. This makes room
00079         for the use of dollar variables as arguments.
00080
00081     #] Intro :
00082     #[ CoTransform :
00083 */
00084
00085 static WORD tranarray[10] = { SUBEXPRESSION, SUBEXPSIZE, 0, 1, 0, 0, 0, 0, 0, 0 };
00086
00087 int CoTransform(UBYTE *in)
00088 {
00089     GETIDENTITY
00090     UBYTE *s = in, c, *ss, *Tempbuf;
00091     WORD number, type, i, *work = AT.WorkPointer+2, *wp, range[2], one = 1;
00092     WORD numdol, *wstart;
00093     int error = 0, irhs;
00094     LONG x;
00095     while ( *in == ',' ) in++;
00096     wp = work + 1;
00097 /*
00098     #[ Sets :
00099
00100     First the set specification(s). No sets means all functions (dangerous!)
00101 */
00102     for(;;) {
00103         if ( *in == '{' ) {
00104             s = in+1;
00105             SKIPBRA2(in)
00106             number = DoTempSet(s,in);
00107             in++;
00108             if ( *in != ',' ) {
00109                 c = in[1]; in[1] = 0;
00110                 MesPrint("&%s: A set in a transform statement should be followed by a comma",s);
00111                 in[1] = c; in++;
00112                 if ( error == 0 ) error = 1;
00113             }
00114         }
00115         else if ( *in == '[' || FG.cTable[*in] == 0 ) {
00116             s = in;
00117             in = SkipAName(in);
00118             if ( *in != ',' ) break;
00119             c = *in; *in = 0;
00120             type = GetName(AC.varnames,s,&number,NOAUTO);
00121             if ( type == CFUNCTION ) {
00122 #ifdef WITHFLOAT
00123                 if ( (number+FUNCTION) == FLOATFUN ) {
00124                     MesPrint("&Illegal use of a transform statement and float_");
00125                     if ( error == 0 ) error = 1;
00126                 }
00127 #endif
00128                 number += MAXVARIABLES + FUNCTION; }
00129             else if ( type != CSET ) {
00130                 MesPrint("&%s: A transform statement starts with sets of functions",s);
00131                 if ( error == 0 ) error = 1;
00132             }
00133             *in++ = c;
00134         }
00135         else {
00136             MesPrint("&Illegal syntax in Transform statement",s);
00137             if ( error == 0 ) error = 1;
00138             return(error);
00139         }
00140         if ( number >= 0 ) {
00141             if ( number < MAXVARIABLES ) {
00142 /*
00143                 Check that this is a set of functions
00144 */
00145                 if ( Sets[number].type != CFUNCTION ) {
00146                     MesPrint("&A set in a transform statement should be a set of functions");
00147                     if ( error == 0 ) error = 1;
00148                 }
00149 #ifdef WITHFLOAT
00150                 WORD *r1, *r2;
00151                 r1 = SetElements + Sets[number].first;
00152                 r2 = SetElements + Sets[number].last;
00153                 while ( r1 < r2 ) {

```

```

00154             if ( *r1++ == FLOATFUN ) {
00155                 MesPrint("&Illegal use of a transform statement and float_");
00156                 if ( error == 0 ) error = 1;
00157             }
00158         }
00159 #endif
00160     }
00161 }
00162     else if ( error == 0 ) error = 1;
00163 /*
00164     Now write the number to the right place
00165 */
00166     *wp++ = number;
00167     while ( *in == ',' ) in++;
00168 }
00169 *work = wp - work;
00170 work = wp; wp++;
00171 /*
00172 #] Sets :
00173
00174 Now we should loop over the various transformations
00175 */
00176 while ( *s ) {
00177     in = s;
00178     if ( FG.cTable[*in] != 0 ) {
00179         MesPrint("&Illegal character in Transform statement");
00180         if ( error == 0 ) error = 1;
00181         return(error);
00182     }
00183     in = SkipAName(in);
00184     if ( *in == '>' || *in == '<' || *in == '+' || *in == '-' ) in++;
00185     ss = in;
00186     c = *ss; *ss = 0;
00187     if ( c != '(' ) {
00188         MesPrint("&Illegal syntax in specifying a transformation inside a Transform statement");
00189         if ( error == 0 ) error = 1;
00190         return(error);
00191     }
00192 /*
00193     #[ replace :
00194 */
00195     if ( StrICmp(s, (UBYTE *) "replace") == 0 ) {
00196 /*
00197         Subkeys: (,,) as in replace_(,,)
00198         The idea here is to read the subkeys as the argument
00199         of a replace_ function.
00200         We put the whole together as in the multiply statement (which
00201         could just be a replace_(....)) and compile it.
00202         Then we expand the tree with Generator and check the complete
00203         expression for legality.
00204 */
00205         type = REPLACEARG;
00206 doreplace:
00207         *ss = c;
00208         if ( ( in = ReadRange(in, range, 0) ) == 0 ) {
00209             if ( error == 0 ) error = 1;
00210             return(error);
00211         }
00212         in++;
00213 /*
00214         We have replace(##)=(...), and we want dum_(...) (DUMFUN)
00215         to send to the compiler. The pointer is after the '=';
00216 */
00217         s = in;
00218         if ( *s != '(' ) {
00219             MesPrint("&");
00220             if ( error == 0 ) error = 1;
00221             return(error);
00222         }
00223         SKIPBRA3(in);
00224         if ( *in != ')' ) {
00225             MesPrint("&");
00226             if ( error == 0 ) error = 1;
00227             return(error);
00228         }
00229         in++;
00230         if ( *in != ',' && *in != '\0' ) {
00231             MesPrint("&");
00232             if ( error == 0 ) error = 1;
00233             return(error);
00234         }
00235         i = in - s;
00236         ss = Tempbuf = (UBYTE *) Malloc1(i+5, "CoTransform/replace");
00237         *ss++ = 'd'; *ss++ = 'u'; *ss++ = 'm'; *ss++ = '_';
00238         NCOPY(ss, s, i)
00239         *ss++ = 0;
00240         AC.ProtoType = tranarray;

```

```

00241         tranarray[4] = AC.cbufnum;
00242         irhs = CompileAlgebra(Tempbuf,RHSIDE,AC.ProtoType);
00243         M_free(Tempbuf,"CoTransform/replace");
00244         if ( irhs < 0 ) {
00245             if ( error == 0 ) error = 1;
00246             return(error);
00247         }
00248         tranarray[2] = irhs;
00249     /*
00250         The result of the compilation goes through Generator during
00251         execution, because that takes care of $-variables.
00252         This is why we could not use replace_ and had to use dum_.
00253     */
00254         *wp++ = ARGGRANGE;
00255         *wp++ = range[0];
00256         *wp++ = range[1];
00257         *wp++ = type;
00258         *wp++ = SUBEXPSIZE+4;
00259         for ( i = 0; i < SUBEXPSIZE; i++ ) *wp++ = tranarray[i];
00260         *wp++ = 1;
00261         *wp++ = 1;
00262         *wp++ = 3;
00263         work = wp-work;
00264         work = wp; *wp++ = 0;
00265         s = in;
00266     }
00267 /*
00268     #] replace :
00269     #[ encode/decode :
00270 */
00271     else if ( StrICmp(s,(UBYTE *)"decode" ) == 0 ) {
00272         type = DECODEARG;
00273         goto doencode;
00274     }
00275     else if ( StrICmp(s,(UBYTE *)"encode" ) == 0 ) {
00276         type = ENCODEARG;
00277 doencode:
00278         *ss = c;
00279         if ( ( in = ReadRange(in,range,2) ) == 0 ) {
00280             if ( error == 0 ) error = 1;
00281             return(error);
00282         }
00283         in++;
00284         s = in; while ( FG.cTable[*in] == 0 ) in++;
00285         c = *in; *in = 0;
00286         Subkeys: base=# or base=$var
00287     /*
00288         if ( StrICmp(s,(UBYTE *)"base" ) == 0 ) {
00289             *in = c;
00290             if ( *in != '=' ) {
00291                 MesPrint("&Illegal base specification in encode/decode transformation");
00292                 if ( error == 0 ) error = 1;
00293                 return(error);
00294             }
00295             in++;
00296             if ( *in == '$' ) {
00297                 in++; ss = in;
00298                 in = SkipAName(in);
00299                 c = *in; *in = 0;
00300                 if ( GetName(AC.dollarnames,ss,&numdol,NOAUTO) != CDOLLAR ) {
00301                     MesPrint("&%s is undefined",ss-1);
00302                     numdol = AddDollar(ss,DOLINDEX,&one,1);
00303                     return(1);
00304                 }
00305                 *in = c;
00306                 x = -numdol;
00307             }
00308             else {
00309                 x = 0;
00310                 while ( FG.cTable[*in] == 1 ) {
00311                     x = 10*x + *in++ - '0';
00312                     if ( x > MAXPOSITIVE4 ) {
00313 illsize:
00314                         MesPrint("&Illegal value for base in encode/decode transformation");
00315                         if ( error == 0 ) error = 1;
00316                         return(error);
00317                     }
00318                     if ( x <= 1 ) goto illsize;
00319                 }
00320                 if ( *in != ',' && *in != '\0' ) {
00321                     MesPrint("&Illegal termination of transformation");
00322                     if ( error == 0 ) error = 1;
00323                     return(error);
00324                 }
00325             }
00326         } else {
00327             MesPrint("&Illegal option in encode/decode transformation");

```

```

00328         if ( error == 0 ) error = 1;
00329         return(error);
00330     }
00331 /*
00332     Now we can put the whole statement together
00333     We have the set(s) in work up to wp and the range in range.
00334     The base is in x and the type tells whether it is encode or decode.
00335 */
00336     *wp++ = ARGRANGE;
00337     *wp++ = range[0];
00338     *wp++ = range[1];
00339     *wp++ = type;
00340     *wp++ = 4;
00341     *wp++ = BASECODE;
00342     *wp++ = (WORD)x;
00343     *work = wp-work;
00344     work = wp; *wp++ = 0;
00345     s = in;
00346 }
00347 /*
00348 #] encode/decode :
00349 #[ implode :
00350 */
00351 else if ( StrICmp(s, (UBYTE *)"implode") == 0
00352         || StrICmp(s, (UBYTE *)"tosumnotation") == 0 ) {
00353 /*
00354     Subkeys: ?
00355 */
00356     type = IMplodeARG;
00357     *ss = c;
00358     if ( ( in = ReadRange(in, range, 1) ) == 0 ) {
00359         if ( error == 0 ) error = 1;
00360         return(error);
00361     }
00362     *wp++ = ARGRANGE;
00363     *wp++ = range[0];
00364     *wp++ = range[1];
00365     *wp++ = type;
00366     *work = wp-work;
00367     work = wp; *wp++ = 0;
00368     s = in;
00369 }
00370 /*
00371 #] implode :
00372 #[ explode :
00373 */
00374 else if ( StrICmp(s, (UBYTE *)"explode") == 0
00375         || StrICmp(s, (UBYTE *)"tointegralnotation") == 0 ) {
00376 /*
00377     Subkeys: ?
00378 */
00379     type = EXPLODEARG;
00380     *ss = c;
00381     if ( ( in = ReadRange(in, range, 1) ) == 0 ) {
00382         if ( error == 0 ) error = 1;
00383         return(error);
00384     }
00385     *wp++ = ARGRANGE;
00386     *wp++ = range[0];
00387     *wp++ = range[1];
00388     *wp++ = type;
00389     *work = wp-work;
00390     work = wp; *wp++ = 0;
00391     s = in;
00392 }
00393 /*
00394 #] explode :
00395 #[ permute :
00396 */
00397 else if ( StrICmp(s, (UBYTE *)"permute") == 0 ) {
00398     type = PERMUTEARG;
00399     *ss = c;
00400     *wp++ = ARGRANGE;
00401     *wp++ = 1;
00402     *wp++ = MAXPOSITIVE4;
00403     *wp++ = type;
00404 /*
00405     Now a sequence of cycles
00406 */
00407     do {
00408         wstart = wp; wp++;
00409         do {
00410             in++;
00411             if ( *in == '$' ) {
00412                 WORD number; UBYTE *t;
00413                 in++; t = in;
00414                 while ( FG.cTable[*in] < 2 ) in++;

```

```

00415         c = *in; *in = 0;
00416         if ( ( number = GetDollar(t) ) < 0 ) {
00417             MesPrint("&Undefined variable %s",t);
00418             if ( !error ) error = 1;
00419             number = AddDollar(t,0,0,0);
00420         }
00421         *in = c;
00422         *wp++ = -number-1;
00423     }
00424     else {
00425         x = 0;
00426         while ( FG.cTable[*in] == 1 ) {
00427             x = 10*x + *in++ - '0';
00428             if ( x > MAXPOSITIVE4 ) {
00429                 MesPrint("&value in permute transformation too large");
00430                 if ( error == 0 ) error = 1;
00431                 return(error);
00432             }
00433         }
00434         if ( x == 0 ) {
00435             MesPrint("&value 0 in permute transformation not allowed");
00436             if ( error == 0 ) error = 1;
00437             return(error);
00438         }
00439         *wp++ = (WORD)x-1;
00440     }
00441     while ( *in == ',' );
00442     if ( *in != '(' ) {
00443         MesPrint("&Illegal syntax in permute transformation");
00444         if ( error == 0 ) error = 1;
00445         return(error);
00446     }
00447     in++;
00448     if ( *in != ',' && *in != '(' && *in != '\0' ) {
00449         MesPrint("&Illegal ending in permute transformation");
00450         if ( error == 0 ) error = 1;
00451         return(error);
00452     }
00453     *wstart = wp-wstart;
00454     if ( *wstart == 1 ) wstart--;
00455 } while ( *in == '(' );
00456 *work = wp-work;
00457 work = wp; *wp++ = 0;
00458 s = in;
00459 }
00460 /*
00461 #] permute :
00462 #[ reverse :
00463 */
00464 else if ( StrICmp(s,(UBYTE *)"reverse") == 0 ) {
00465     type = REVERSEARG;
00466     *ss = c;
00467     if ( ( in = ReadRange(in,range,1) ) == 0 ) {
00468         if ( error == 0 ) error = 1;
00469         return(error);
00470     }
00471     *wp++ = ARGRANGE;
00472     *wp++ = range[0];
00473     *wp++ = range[1];
00474     *wp++ = type;
00475     *work = wp-work;
00476     work = wp; *wp++ = 0;
00477     s = in;
00478 }
00479 /*
00480 #] reverse :
00481 #[ dedup :
00482 */
00483 else if ( StrICmp(s,(UBYTE *)"dedup") == 0 ) {
00484     type = DEDUPARG;
00485     *ss = c;
00486     if ( ( in = ReadRange(in,range,1) ) == 0 ) {
00487         if ( error == 0 ) error = 1;
00488         return(error);
00489     }
00490     *wp++ = ARGRANGE;
00491     *wp++ = range[0];
00492     *wp++ = range[1];
00493     *wp++ = type;
00494     *work = wp-work;
00495     work = wp; *wp++ = 0;
00496     s = in;
00497 }
00498 /*
00499 #] dedup :
00500 #[ cycle :
00501 */

```

```

00502     else if ( StrICmp(s, (UBYTE *) "cycle") == 0 ) {
00503         type = CYCLEARG;
00504         *ss = c;
00505         if ( ( in = ReadRange(in, range, 0) ) == 0 ) {
00506             if ( error == 0 ) error = 1;
00507             return(error);
00508         }
00509         *wp++ = ARGRANGE;
00510         *wp++ = range[0];
00511         *wp++ = range[1];
00512         *wp++ = type;
00513     /*
00514         Now a sequence of cycles
00515     */
00516     in++;
00517     if ( *in == '+' ) {
00518     }
00519     else if ( *in == '-' ) {
00520         one = -1;
00521     }
00522     else {
00523         MesPrint("&Cycle in a Transform statement should be followed by +/-number/$");
00524         if ( error == 0 ) error = 1;
00525         return(error);
00526     }
00527     in++; x = 0;
00528     if ( *in == '$' ) {
00529         UBYTE *si = in;
00530         in++; si = in;
00531         while ( FG.cTable[*in] == 0 || FG.cTable[*in] == 1 ) in++;
00532         c = *in; *in = 0;
00533         if ( ( x = GetDollar(si) ) < 0 ) {
00534             MesPrint("&Number in cycle in a Transform statement too big");
00535             error = 1;
00536         }
00537         *in = c;
00538         if ( one < 0 ) x += MAXPOSITIVE4;
00539         x += MAXPOSITIVE2;
00540         *wp++ = x;
00541     }
00542     else {
00543         while ( FG.cTable[*in] == 1 ) {
00544             x = 10*x + *in++ - '0';
00545             if ( x > MAXPOSITIVE4 ) {
00546                 MesPrint("&Number in cycle in a Transform statement too big");
00547                 if ( error == 0 ) error = 1;
00548                 return(error);
00549             }
00550         }
00551         *wp++ = x*one;
00552     }
00553     *work = wp-work;
00554     work = wp; *wp++ = 0;
00555     s = in;
00556 }
00557 /*
00558 #] cycle :
00559 #[ islyndon/tolyndon :
00560 */
00561     else if ( StrICmp(s, (UBYTE *) "islyndon") == 0 ) {
00562         type = ISLYNDON;
00563         goto doreplace;
00564     }
00565     else if ( StrICmp(s, (UBYTE *) "islyndon<") == 0 ) {
00566         type = ISLYNDON;
00567         goto doreplace;
00568     }
00569     else if ( StrICmp(s, (UBYTE *) "islyndon-") == 0 ) {
00570         type = ISLYNDON;
00571         goto doreplace;
00572     }
00573     else if ( StrICmp(s, (UBYTE *) "islyndon>") == 0 ) {
00574         type = ISLYNDONR;
00575         goto doreplace;
00576     }
00577     else if ( StrICmp(s, (UBYTE *) "islyndon+") == 0 ) {
00578         type = ISLYNDONR;
00579         goto doreplace;
00580     }
00581     else if ( StrICmp(s, (UBYTE *) "tolyndon") == 0 ) {
00582         type = TOLYNDON;
00583         goto doreplace;
00584     }
00585     else if ( StrICmp(s, (UBYTE *) "tolyndon<") == 0 ) {
00586         type = TOLYNDON;
00587         goto doreplace;
00588     }

```



```

00589     else if ( StrICmp(s,(UBYTE *)"tolyndon-" ) == 0 ) {
00590         type = TOLYNDON;
00591         goto doreplace;
00592     }
00593     else if ( StrICmp(s,(UBYTE *)"tolyndon>" ) == 0 ) {
00594         type = TOLYNDONR;
00595         goto doreplace;
00596     }
00597     else if ( StrICmp(s,(UBYTE *)"tolyndon+" ) == 0 ) {
00598         type = TOLYNDONR;
00599         goto doreplace;
00600     }
00601     /*
00602     #] islyndon/tolyndon :
00603     #[ addarg :
00604     */
00605     else if ( StrICmp(s,(UBYTE *)"addargs" ) == 0 ) {
00606         type = ADDARG;
00607         *ss = c;
00608         if ( ( in = ReadRange(in,range,1) ) == 0 ) {
00609             if ( error == 0 ) error = 1;
00610             return(error);
00611         }
00612         *wp++ = ARGGRANGE;
00613         *wp++ = range[0];
00614         *wp++ = range[1];
00615         *wp++ = type;
00616         *work = wp-work;
00617         work = wp; *wp++ = 0;
00618         s = in;
00619     }
00620     /*
00621     #] addarg :
00622     #[ mularg :
00623     */
00624     else if ( ( StrICmp(s,(UBYTE *)"mulargs" ) == 0 )
00625         || ( StrICmp(s,(UBYTE *)"multiplyargs" ) == 0 ) ) {
00626         type = MULTIPLYARG;
00627         *ss = c;
00628         if ( ( in = ReadRange(in,range,1) ) == 0 ) {
00629             if ( error == 0 ) error = 1;
00630             return(error);
00631         }
00632         *wp++ = ARGGRANGE;
00633         *wp++ = range[0];
00634         *wp++ = range[1];
00635         *wp++ = type;
00636         *work = wp-work;
00637         work = wp; *wp++ = 0;
00638         s = in;
00639     }
00640     /*
00641     #] mularg :
00642     #[ droparg :
00643     */
00644     else if ( StrICmp(s,(UBYTE *)"dropargs" ) == 0 ) {
00645         type = DROPARG;
00646         *ss = c;
00647         if ( ( in = ReadRange(in,range,1) ) == 0 ) {
00648             if ( error == 0 ) error = 1;
00649             return(error);
00650         }
00651         *wp++ = ARGGRANGE;
00652         *wp++ = range[0];
00653         *wp++ = range[1];
00654         *wp++ = type;
00655         *work = wp-work;
00656         work = wp; *wp++ = 0;
00657         s = in;
00658     }
00659     /*
00660     #] droparg :
00661     #[ selectarg :
00662     */
00663     else if ( StrICmp(s,(UBYTE *)"selectargs" ) == 0 ) {
00664         type = SELECTARG;
00665         *ss = c;
00666         if ( ( in = ReadRange(in,range,1) ) == 0 ) {
00667             if ( error == 0 ) error = 1;
00668             return(error);
00669         }
00670         *wp++ = ARGGRANGE;
00671         *wp++ = range[0];
00672         *wp++ = range[1];
00673         *wp++ = type;
00674         *work = wp-work;
00675         work = wp; *wp++ = 0;

```

```

00676         s = in;
00677     }
00678     /*
00679     #] selectarg :
00680     #[ ZtoH :
00681     */
00682     else if ( StrICmp(s, (UBYTE *)"ztoh") == 0 ) {
00683     /*
00684         Subkeys: ?
00685     */
00686         type = ZTOHARG;
00687         *ss = c;
00688         if ( ( in = ReadRange(in, range, 1) ) == 0 ) {
00689             if ( error == 0 ) error = 1;
00690             return(error);
00691         }
00692         *wp++ = ARGRANGE;
00693         *wp++ = range[0];
00694         *wp++ = range[1];
00695         *wp++ = type;
00696         *work = wp - work;
00697         work = wp; *wp++ = 0;
00698         s = in;
00699     }
00700     /*
00701     #] ZtoH :
00702     #[ HtoZ :
00703     */
00704     else if ( StrICmp(s, (UBYTE *)"htoz") == 0 ) {
00705     /*
00706         Subkeys: ?
00707     */
00708         type = HTOZARG;
00709         *ss = c;
00710         if ( ( in = ReadRange(in, range, 1) ) == 0 ) {
00711             if ( error == 0 ) error = 1;
00712             return(error);
00713         }
00714         *wp++ = ARGRANGE;
00715         *wp++ = range[0];
00716         *wp++ = range[1];
00717         *wp++ = type;
00718         *work = wp - work;
00719         work = wp; *wp++ = 0;
00720         s = in;
00721     }
00722     /*
00723     #] HtoZ :
00724     */
00725     else {
00726         MesPrint("&Unknown transformation inside a Transform statement: %s", s);
00727         *ss = c;
00728         if ( error == 0 ) error = 1;
00729         return(error);
00730     }
00731     while ( *s == ',' ) s++;
00732 }
00733 AT.WorkPointer[0] = TYPETRANSFORM;
00734 AT.WorkPointer[1] = i = wp - AT.WorkPointer;
00735 AddNtoL(i, AT.WorkPointer);
00736 return(error);
00737 }
00738
00739 /*
00740 #] CoTransform :
00741 #[ RunTransform :
00742
00743 Executes the transform statement.
00744 This routine hunts down the functions and sends them to the various
00745 action routines.
00746 params: size, #set1, ..., #setn, transformations
00747
00748 */
00749
00750 int RunTransform(PHEAD WORD *term, WORD *params)
00751 {
00752     WORD *t, *tstop, *w, *m, *out, *in, *tt, retval;
00753     WORD *fun, *args, *info, *infoend, *onetransform, *funs, *endfun;
00754     WORD *thearg = 0, *iterm, *newterm, *nt, *oldwork = AT.WorkPointer, sign = 1;
00755     int i;
00756     out = tstop = term + *term;
00757     tstop -= ABS(tstop[-1]);
00758     in = term;
00759     t = term + 1;
00760     while ( t < tstop ) {
00761         endfun = onetransform = params + *params;
00762         funs = params + 1;

```

```

00763         if ( *t < FUNCTION ) {}
00764         else if ( funs == endfun ) { /* we do all functions */
00765 hit;;
00766 #ifdef WITHFLOAT
00767         if ( *t == FLOATFUN ) goto next;
00768 #endif
00769         while ( in < t ) *out++ = *in++;
00770         tt = t + t[1]; fun = out;
00771         while ( in < tt ) *out++ = *in++;
00772         do {
00773             args = onetransform + 1;
00774             info = args; while ( *info <= MAXRANGEINDICATOR ) {
00775                 if ( *info == ALLARGS ) info++;
00776                 else if ( *info == NUMARG ) info += 2;
00777                 else if ( *info == ARGRANGE ) info += 3;
00778                 else if ( *info == MAKEARGS ) info += 3;
00779             }
00780             switch ( *info ) {
00781                 case REPLACEARG:
00782                     if ( RunReplace(BHEAD fun,args,info) ) goto abo;
00783                     out = fun + fun[1];
00784                     break;
00785                 case ENCODEARG:
00786                     if ( RunEncode(BHEAD fun,args,info) ) goto abo;
00787                     out = fun + fun[1];
00788                     break;
00789                 case DECODEARG:
00790                     if ( RunDecode(BHEAD fun,args,info) ) goto abo;
00791                     out = fun + fun[1];
00792                     break;
00793                 case IMplodeARG:
00794                     if ( RunImplode(fun,args) ) goto abo;
00795                     out = fun + fun[1];
00796                     break;
00797                 case EXPLODEARG:
00798                     if ( RunExplode(BHEAD fun,args) ) goto abo;
00799                     out = fun + fun[1];
00800                     break;
00801                 case PERMUTEARG:
00802                     if ( RunPermute(BHEAD fun,args,info) ) goto abo;
00803                     out = fun + fun[1];
00804                     break;
00805                 case REVERSEARG:
00806                     if ( RunReverse(BHEAD fun,args) ) goto abo;
00807                     out = fun + fun[1];
00808                     break;
00809                 case DEDUPARG:
00810                     if ( RunDedup(BHEAD fun,args) ) goto abo;
00811                     out = fun + fun[1];
00812                     break;
00813                 case CYCLEARG:
00814                     if ( RunCycle(BHEAD fun,args,info) ) goto abo;
00815                     out = fun + fun[1];
00816                     break;
00817                 case ADDARG:
00818                     if ( RunAddArg(BHEAD fun,args) ) goto abo;
00819                     out = fun + fun[1];
00820                     break;
00821                 case MULTIPLYARG:
00822                     if ( RunMulArg(BHEAD fun,args) ) goto abo;
00823                     out = fun + fun[1];
00824                     break;
00825                 case ISLYNDON:
00826                     if ( ( retval = RunIsLyndon(BHEAD fun,args,1) ) < -1 ) goto abo;
00827                     goto returnvalues;
00828                     break;
00829                 case ISLYNDONR:
00830                     if ( ( retval = RunIsLyndon(BHEAD fun,args,-1) ) < -1 ) goto abo;
00831                     goto returnvalues;
00832                     break;
00833                 case TOLYNDON:
00834                     if ( ( retval = RunToLyndon(BHEAD fun,args,1) ) < -1 ) goto abo;
00835                     goto returnvalues;
00836                     break;
00837                 case TOLYNDONR:
00838                     if ( ( retval = RunToLyndon(BHEAD fun,args,-1) ) < -1 ) goto abo;
00839 returnvalues;;
00840                     out = fun + fun[1];
00841                     if ( retval == -1 ) break;
00842 /*
00843 Work out the yes/no stuff
00844 */
00845 AT.WorkPointer += 2*AM.MaxTer;
00846 if ( AT.WorkPointer > AT.WorkTop ) {
00847     MLOCK(ErrorMessageLock);
00848     MesWork();
00849     MUNLOCK(ErrorMessageLock);

```

```

00850         return(-1);
00851     }
00852     iterm = AT.WorkPointer;
00853     info++;
00854     for ( i = 0; i < *info; i++ ) iterm[i] = info[i];
00855     AT.WorkPointer = iterm + *iterm;
00856     AR.Eside = LHSIDEX;
00857     NewSort(BHEAD0);
00858     if ( Generator(BHEAD iterm,AR.Cnumlhs) ) {
00859         LowerSortLevel();
00860         AT.WorkPointer = oldwork;
00861         return(-1);
00862     }
00863     newterm = AT.WorkPointer;
00864     if ( EndSort(BHEAD newterm,1) < 0 ) {}
00865     if ( ( *newterm && *(newterm+*newterm) != 0 ) || *newterm == 0 ) {
00866         MLOCK(ErrorMessageLock);
00867         MesPrint("&yes/no information in islyndon/tolyndon does not evaluate into
a single term");
00868         MUNLOCK(ErrorMessageLock);
00869         return(-1);
00870     }
00871     AR.Eside = RHSIDE;
00872     i = *newterm; tt = iterm; nt = newterm;
00873     NCOPY(tt,nt,i);
00874     AT.WorkPointer = iterm + *iterm;
00875     info = iterm + 1;
00876     infoend = info+info[1];
00877     info += FUNHEAD;
00878
00879     if ( retval == 0 ) {
00880         /*
00881             Need second argument (=no)
00882         */
00883         if ( info >= infoend ) {
00884             abortlyndon::
00885             MLOCK(ErrorMessageLock);
00886             MesPrint("There should be a yes and a no argument in
islyndon/tolyndon");
00887             MUNLOCK(ErrorMessageLock);
00888             Terminate(-1);
00889         }
00890         NEXTARG(info)
00891         if ( info >= infoend ) goto abortlyndon;
00892         thearg = info;
00893     }
00894     else if ( retval == 1 ) {
00895         /*
00896             Need first argument (=yes)
00897         */
00898         if ( info >= infoend ) goto abortlyndon;
00899         thearg = info;
00900         NEXTARG(info)
00901         if ( info >= infoend ) goto abortlyndon;
00902     }
00903     NEXTARG(info)
00904     if ( info < infoend ) goto abortlyndon;
00905     /*
00906         The argument in thearg needs to be copied
00907         We did not pull it through generator to guarantee
00908         that it is a single argument.
00909         The easiest way is to let the routine Normalize
00910         do the job and put everything in an exponent function
00911         with the power one.
00912     */
00913     if ( *thearg == -SNUMBER && thearg[1] == 0 ) {
00914         *term = 0; return(0);
00915     }
00916     if ( *thearg == -SNUMBER && thearg[1] == 1 ) { }
00917     else {
00918         fun = out;
00919         *out++ = EXPONENT; out++; *out++ = 1; FILLFUN3(out);
00920         COPY1ARG(out,thearg);
00921         *out++ = -SNUMBER; *out++ = 1;
00922         fun[1] = out-fun;
00923     }
00924     break;
00925 case DROPARG:
00926     if ( RunDropArg(BHEAD fun,args) ) goto abo;
00927     out = fun + fun[1];
00928     break;
00929 case SELECTARG:
00930     if ( RunSelectArg(BHEAD fun,args) ) goto abo;
00931     out = fun + fun[1];
00932     break;
00933 case ZTOHARG:
00934     {

```

```

00935         WORD s = RunZtoHArg(BHEAD fun,args);
00936         if ( s < 0 ) goto abo;
00937         if ( s == 1 ) sign = -sign;
00938         out = fun + fun[1];
00939     }
00940     break;
00941     case HTOZARG:
00942     {
00943         WORD s = RunHtoZArg(BHEAD fun,args);
00944         if ( s < 0 ) goto abo;
00945         if ( s == 1 ) sign = -sign;
00946         out = fun + fun[1];
00947     }
00948     break;
00949     default:
00950         MLOCK(ErrorMessageLock);
00951         MesPrint("Irregular code in execution of transform statement");
00952         MUNLOCK(ErrorMessageLock);
00953         Terminate(-1);
00954     }
00955     onetransform += *onetransform;
00956 } while ( *onetransform );
00957 }
00958 else {
00959     while ( funs < endfun ) { /* sum over sets */
00960         if ( *funs > MAXVARIABLES ) {
00961             if ( *t == *funs-MAXVARIABLES ) goto hit;
00962         }
00963         else {
00964             w = SetElements + Sets[*funs].first;
00965             m = SetElements + Sets[*funs].last;
00966             while ( w < m ) { /* sum over set elements */
00967                 if ( *w == *t ) goto hit;
00968                 w++;
00969             }
00970         }
00971         funs++;
00972     }
00973 }
00974 #ifdef WITHFLOAT
00975 next:
00976 #endif
00977     t += t[1];
00978 }
00979 tt = term + *term; while ( in < tt ) *out++ = *in++;
00980 if ( sign == -1 ) out[-1] = -out[-1];
00981 *tt = i = out - tt;
00982 /*
00983 Now copy the whole thing back
00984 */
00985 NCOPY(term,tt,i)
00986 return(0);
00987 abo:
00988 MLOCK(ErrorMessageLock);
00989 MesCall("RunTransform");
00990 MUNLOCK(ErrorMessageLock);
00991 return(-1);
00992 }
00993
00994 /*
00995 #] RunTransform :
00996 #[ RunEncode :
00997
00998 The info is given by
00999 ENCODEARG,size,BASECODE,num
01000 and possibly more codes to follow.
01001 Only one range is allowed and for now, it should be fully numerical
01002 If the range is in reverse order, we need to either revert it
01003 first or work with an array of pointers.
01004 */
01005
01006 int RunEncode(PHEAD WORD *fun, WORD *args, WORD *info)
01007 {
01008     WORD base, *f, *funstop, *fun1, *t, size1, size2, size3, *arg;
01009     int num, num1, num2, n, i, i1, i2;
01010     UWORD *scrat1, *scrat2, *scrat3;
01011     WORD *tt, *tstop, totarg, arg1, arg2;
01012     if ( functions[fun[0]-FUNCTION].spec != 0 ) return(0);
01013     if ( *args != ARGRANGE ) {
01014         MLOCK(ErrorMessageLock);
01015         MesPrint("Illegal range encountered in RunEncode");
01016         MUNLOCK(ErrorMessageLock);
01017         Terminate(-1);
01018     }
01019     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
01020     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
01021     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);

```

```

01022     if ( arg1 > totarg || arg2 > totarg ) return(0);
01023
01024     if ( info[2] == BASECODE ) {
01025         base = info[3];
01026         if ( base <= 0 ) { /* is a dollar variable */
01027             i1 = -base;
01028             base = DolToNumber(BHEAD i1);
01029             if ( AN.ErrorInDollar || base < 2 ) {
01030                 MLOCK(ErrorMessageLock);
01031                 MesPrint("%$s does not have a number value > 1 in base/encode/transform statement in
module %1",
01032
01033                     DOLLARNAME(Dollars,i1),AC.CModule);
01034                 MUNLOCK(ErrorMessageLock);
01035                 Terminate(-1);
01036             }
01037         /*
01038         Compute number of pointers needed and make sure there is space
01039         */
01040         if ( arg1 > arg2 ) { num1 = arg2; num2 = arg1; }
01041         else { num1 = arg1; num2 = arg2; }
01042         num = num2-num1+1;
01043         WantAddPointers(num);
01044     /*
01045     Collect the pointers in pWorkSpace
01046     */
01047     n = 1; funstop = fun+fun[1]; f = fun+FUNHEAD;
01048     while ( n < num1 ) {
01049         if ( f >= funstop ) return(0);
01050         NEXTARG(f);
01051         n++;
01052     }
01053     fun1 = f; i = 0;
01054     while ( n <= num2 ) {
01055         if ( f >= funstop ) return(0);
01056         if ( *f != -SNUMBER ) {
01057             if ( *f < 0 ) return(0);
01058             t = f + *f - 1;
01059             i1 = ABS(*t);
01060             if ( (*f-i1) != (ARGHEAD+1) ) return(0); /* Not numerical */
01061             i1 = (i1-1)/2 - 1;
01062             t--;
01063             while ( i1 > 0 ) {
01064                 if ( *t != 0 ) return(0); /* Not an integer */
01065                 t--; i1--;
01066             }
01067             AT.pWorkSpace[AT.pWorkPointer+i] = f;
01068             i++;
01069             NEXTARG(f);
01070             n++;
01071         }
01072     }
01073     /*
01074     f points now to after the arguments; fun1 at the first.
01075     Now check whether we need to revert the order
01076     */
01077     if ( arg1 > arg2 ) {
01078         i1 = 0; i2 = i-1;
01079         while ( i1 < i2 ) {
01080             t = AT.pWorkSpace[AT.pWorkPointer+i1];
01081             AT.pWorkSpace[AT.pWorkPointer+i1] = AT.pWorkSpace[AT.pWorkPointer+i2];
01082             AT.pWorkSpace[AT.pWorkPointer+i2] = t;
01083             i1++; i2--;
01084         }
01085     }
01086     /*
01087     Now we can put the thing together.
01088     x = arg1;
01089     x = base*x+arg2
01090     x = base*x+arg3 etc.
01091     We need three scratch arrays for long integers
01092     (see NumberMalloc in tools.c).
01093     */
01094     scrat1 = NumberMalloc("RunEncode");
01095     scrat2 = NumberMalloc("RunEncode");
01096     scrat3 = NumberMalloc("RunEncode");
01097     arg = AT.pWorkSpace[AT.pWorkPointer];
01098     size1 = PutArgInScratch(arg,scrat1);
01099     i--;
01100     while ( i > 0 ) {
01101         if ( MulLong(scrat1,size1,(UWORD *)(&base),1,scrat2,&size2) ) {
01102             NumberFree(scrat3,"RunEncode");
01103             NumberFree(scrat2,"RunEncode");
01104             NumberFree(scrat1,"RunEncode");
01105             goto CalledFrom;
01106         }
01107         NEXTARG(arg);

```

```

01108         size3 = PutArgInScratch(arg,scrat3);
01109         if ( AddLong(scrat2,size2,scrat3,size3,scrat1,&size1) ) {
01110             NumberFree(scrat3,"RunEncode");
01111             NumberFree(scrat2,"RunEncode");
01112             NumberFree(scrat1,"RunEncode");
01113             goto CalledFrom;
01114         }
01115         i--;
01116     }
01117 /*
01118     Now put the output in place. There are two cases, one being much
01119     faster than the other. Hence we program both.
01120     Fast: it fits inside the old location.
01121     Slow: it does not.
01122     The total space is f-funl
01123 */
01124     if ( size1 == 0 ) { /* Fits! */
01125         *funl++ = -SNUMBER; *funl++ = 0;
01126         while ( f < funstop ) *funl++ = *f++;
01127         fun[l] = funstop-fun;
01128     }
01129     else if ( size1 == 1 && scrat1[0] <= MAXPOSITIVE ) { /* Fits! */
01130         *funl++ = -SNUMBER; *funl++ = scrat1[0];
01131         while ( f < funstop ) *funl++ = *f++;
01132         fun[l] = funl-fun;
01133     }
01134     else if ( size1 == -1 && scrat1[0] <= MAXPOSITIVE+1 ) { /* Fits! */
01135         *funl++ = -SNUMBER;
01136         if ( scrat1[0] < MAXPOSITIVE ) *funl++ = scrat1[0];
01137         else *funl++ = (WORD)(MAXPOSITIVE+1);
01138         while ( f < funstop ) *funl++ = *f++;
01139         fun[l] = funl-fun;
01140     }
01141     else if ( ABS(size1)*2+2+ARGHEAD <= f-funl ) { /* Fits! */
01142         if ( size1 < 0 ) { size2 = size1*2-1; size1 = -size1; size3 = -size2; }
01143         else { size2 = 2*size1+1; size3 = size2; }
01144         *funl++ = size3+ARGHEAD+1;
01145         *funl++ = 0; FILLARG(funl);
01146         *funl++ = size3+1;
01147         for ( i = 0; i < size1; i++ ) *funl++ = scrat1[i];
01148         *funl++ = 1;
01149         for ( i = 1; i < size1; i++ ) *funl++ = 0;
01150         *funl++ = size2;
01151         while ( f < funstop ) *funl++ = *f++;
01152         fun[l] = funl-fun;
01153     }
01154     else { /* Does not fit */
01155         t = funstop;
01156         if ( size1 < 0 ) { size2 = size1*2-1; size1 = -size1; size3 = -size2; }
01157         else { size2 = 2*size1+1; size3 = size2; }
01158         *t++ = size3+ARGHEAD+1;
01159         *t++ = 0; FILLARG(t);
01160         *t++ = size3+1;
01161         for ( i = 0; i < size1; i++ ) *t++ = scrat1[i];
01162         *t++ = 1;
01163         for ( i = 1; i < size1; i++ ) *t++ = 0;
01164         *t++ = size2;
01165         while ( f < funstop ) *t++ = *f++;
01166         f = funstop;
01167         while ( f < t ) *funl++ = *f++;
01168         fun[l] = funl-fun;
01169     }
01170     NumberFree(scrat3,"RunEncode");
01171     NumberFree(scrat2,"RunEncode");
01172     NumberFree(scrat1,"RunEncode");
01173 }
01174 else {
01175     MLOCK(ErrorMessageLock);
01176     MesPrint("Unimplemented type of encoding encountered in RunEncode");
01177     MUNLOCK(ErrorMessageLock);
01178     Terminate(-1);
01179 }
01180 return(0);
01181 CalledFrom:
01182     MLOCK(ErrorMessageLock);
01183     MesCall("RunEncode");
01184     MUNLOCK(ErrorMessageLock);
01185     return(-1);
01186 }
01187
01188 /*
01189     #] RunEncode :
01190     #[ RunDecode :
01191 */
01192
01193 int RunDecode(PHEAD WORD *fun, WORD *args, WORD *info)
01194 {

```

```

01195     WORD base, num, num1, num2, n, *f, *funstop, *fun1, size1, size2, size3, *t;
01196     WORD i1, i2, i, sig;
01197     UWORD *scrat1, *scrat2, *scrat3;
01198     WORD *tt, *tstop, totarg, arg1, arg2;
01199     if ( functions[fun[0]-FUNCTION].spec != 0 ) return(0);
01200     if ( *args != ARGRANGE ) {
01201         MLOCK(ErrorMessageLock);
01202         MesPrint("Illegal range encountered in RunDecode");
01203         MUNLOCK(ErrorMessageLock);
01204         Terminate(-1);
01205     }
01206     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
01207     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
01208     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
01209     if ( arg1 > totarg && arg2 > totarg ) return(0);
01210     if ( info[2] == BASECODE ) {
01211         base = info[3];
01212         if ( base <= 0 ) { /* is a dollar variable */
01213             i1 = -base;
01214             base = DolToNumber(BHEAD i1);
01215             if ( AN.ErrorInDollar || base < 2 ) {
01216                 MLOCK(ErrorMessageLock);
01217                 MesPrint("%$s does not have a number value > 1 in base/decode/transform statement in
module %1",
01218                     DOLLARNAME(Dollars,i1),AC.CModule);
01219                 MUNLOCK(ErrorMessageLock);
01220                 Terminate(-1);
01221             }
01222         }
01223     /*
01224     Compute number of output arguments needed
01225     */
01226     if ( arg1 > arg2 ) { num1 = arg2; num2 = arg1; }
01227     else { num1 = arg1; num2 = arg2; }
01228     num = num2-num1+1;
01229     if ( num <= 1 ) return(0);
01230 /*
01231 Find argument num1
01232 */
01233     funstop = fun + fun[1];
01234     f = fun + FUNHEAD; n = 1;
01235     while ( f < funstop ) {
01236         if ( n == num1 ) break;
01237         NEXTARG(f); n++;
01238     }
01239     if ( f >= funstop ) return(0); /* not enough arguments */
01240 /*
01241 Check that f is integer
01242 */
01243     if ( *f == -SNUMBER ) {}
01244     else if ( *f < 0 ) return(0);
01245     else {
01246         t = f + *f - 1;
01247         i1 = ABS(*t);
01248         if ( (*f-i1) != (ARGHEAD+1) ) return(0); /* Not numerical */
01249         i1 = (i1-1)/2 - 1;
01250         t--;
01251         while ( i1 > 0 ) {
01252             if ( *t != 0 ) return(0); /* Not an integer */
01253             t--; i1--;
01254         }
01255     }
01256     fun1 = f;
01257 /*
01258 The argument that should be decoded is in fun1
01259 We have to copy it to scratch
01260 */
01261     scrat1 = NumberMalloc("RunEncode");
01262     scrat2 = NumberMalloc("RunEncode");
01263     scrat3 = NumberMalloc("RunEncode");
01264     size1 = PutArgInScratch(fun1,scrat1);
01265     if ( size1 < 0 ) { sig = -1; size1 = -size1; }
01266     else sig = 1;
01267 /*
01268 We can check first whether this number can be decoded
01269 */
01270     scrat2[0] = base; size2 = 1;
01271     if ( RaisPow(BHEAD scrat2,&size2,num) ) {
01272         NumberFree(scrat3,"RunEncode");
01273         NumberFree(scrat2,"RunEncode");
01274         NumberFree(scrat1,"RunEncode");
01275         goto CalledFrom;
01276     }
01277     if ( BigLong(scrat1,size1,scrat2,size2) >= 0 ) { /* Number too big */
01278         NumberFree(scrat3,"RunEncode");
01279         NumberFree(scrat2,"RunEncode");
01280         NumberFree(scrat1,"RunEncode");

```



```

01281         return(0);
01282     }
01283     /*
01284     We need num*2 spaces
01285     */
01286     if ( *fun1 > num*2 ) { /* shrink space */
01287         t = fun1 + 2*num; f = fun1 + *fun1;
01288         while ( f < funstop ) *t++ = *f++;
01289         fun[1] = t - fun;
01290     }
01291     else if ( *fun1 < num*2 ) { /* case includes -SNUMBER */
01292         if ( *fun1 < 0 ) { /* expand space from -SNUMBER */
01293             fun[1] += (num-1)*2;
01294             t = funstop + (num-1)*2;
01295         }
01296         else { /* expand space from general argument */
01297             fun[1] += 2*num - *fun1;
01298             t = funstop + 2*num - *fun1;
01299         }
01300         f = funstop;
01301         while ( f > fun1 ) *--t = *--f;
01302     }
01303     /*
01304     Now there is space for num -SNUMBER arguments filled from the top.
01305     */
01306     for ( i = num-1; i >= 0; i-- ) {
01307         DivLong(scrat1,size1,(UWORD *)(&base),1,scrat2,&size2,scrat3,&size3);
01308         fun1[2+i] = -SNUMBER;
01309         if ( size3 == 0 ) fun1[2+i+1] = 0;
01310         else fun1[2+i+1] = (WORD)(scrat3[0])*sig;
01311         for ( i1 = 0; i1 < size2; i1++ ) scrat1[i1] = scrat2[i1];
01312         size1 = size2;
01313     }
01314     if ( size2 != 0 ) {
01315         MLOCK(ErrorMessageLock);
01316         MesPrint("RunDecode: number to be decoded is too big");
01317         MUNLOCK(ErrorMessageLock);
01318         NumberFree(scrat3,"RunEncode");
01319         NumberFree(scrat2,"RunEncode");
01320         NumberFree(scrat1,"RunEncode");
01321         goto CalledFrom;
01322     }
01323     /*
01324     Now check whether we should change the order of the arguments
01325     */
01326     if ( arg1 > arg2 ) {
01327         i1 = 1; i2 = 2*num-1;
01328         while ( i2 > i1 ) {
01329             i = fun1[i1]; fun1[i1] = fun1[i2]; fun1[i2] = i;
01330             i1 += 2; i2 -= 2;
01331         }
01332     }
01333     NumberFree(scrat3,"RunEncode");
01334     NumberFree(scrat2,"RunEncode");
01335     NumberFree(scrat1,"RunEncode");
01336 }
01337 else {
01338     MLOCK(ErrorMessageLock);
01339     MesPrint("Unimplemented type of encoding encountered in RunDecode");
01340     MUNLOCK(ErrorMessageLock);
01341     Terminate(-1);
01342 }
01343 return(0);
01344 CalledFrom:
01345 MLOCK(ErrorMessageLock);
01346 MesCall("RunDecode");
01347 MUNLOCK(ErrorMessageLock);
01348 return(-1);
01349 }
01350
01351 /*
01352 #] RunDecode :
01353 #[ RunReplace :
01354
01355 Gets the function, passes the arguments and looks whether they
01356 need to be treated. If so, the exact treatment is found in info.
01357 The info is given as if it is a function of type REPLACEMENT but
01358 its name is REPLACEARG (which is NOT a function).
01359 It is performed on the arguments.
01360 The output is at first written after fun and in the end overwrites fun.
01361 */
01362
01363 int RunReplace(PHEAD WORD *fun, WORD *args, WORD *info)
01364 {
01365     int n = 0, i, dirty = 0, totarg, nfix, nwild, ngeneral;
01366     WORD *t, *tt, *u, *tstop, *info1, *infoend, *oldwork = AT.WorkPointer;
01367     WORD *term, *newterm, *nt, *term1, *term2;

```

```

01368     WORD wild[4], mask, *term3, *term4, *oldmask = AT.WildMask;
01369     WORD n1, n2, doanyway;
01370     info++;
01371     t = fun; tstop = fun + fun[1]; u = tstop;
01372     for ( i = 0; i < FUNHEAD; i++ ) *u++ = *t++;
01373     tt = t;
01374     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01375         totarg = 0;
01376         while ( tt < tstop ) { totarg++; NEXTARG(tt); }
01377     }
01378     else {
01379         totarg = tstop - tt;
01380     }
01381     /*
01382     Now get the info through Generator to bring it to standard form.
01383     info points at a single term that should be sent to Generator.
01384
01385     We want to put the information in the Workspace but fun etc lies there
01386     already. This means that we have to move the WorkPointer quite high up.
01387     */
01388     AT.WorkPointer += 2*AM.MaxTer;
01389     if ( AT.WorkPointer > AT.WorkTop ) {
01390         MLOCK(ErrorMessageLock);
01391         MesWork();
01392         MUNLOCK(ErrorMessageLock);
01393         return(-1);
01394     }
01395     term = AT.WorkPointer;
01396     for ( i = 0; i < *info; i++ ) term[i] = info[i];
01397     AT.WorkPointer = term + *term;
01398     AR.Eside = LHSIDEX;
01399     NewSort(BHEAD0);
01400     if ( Generator(BHEAD term,AR.Cnumlhs) ) {
01401         LowerSortLevel();
01402         AT.WorkPointer = oldwork;
01403         return(-1);
01404     }
01405     newterm = AT.WorkPointer;
01406     if ( EndSort(BHEAD newterm,1) < 0 ) {}
01407     if ( ( *newterm && *(newterm+*newterm) != 0 ) || *newterm == 0 ) {
01408         MLOCK(ErrorMessageLock);
01409         MesPrint("&information in replace transformation does not evaluate into a single term");
01410         MUNLOCK(ErrorMessageLock);
01411         return(-1);
01412     }
01413     AR.Eside = RHSIDE;
01414     i = *newterm; tt = term; nt = newterm;
01415     NCOPY(tt,nt,i);
01416     AT.WorkPointer = term + *term;
01417     info = term + 1;
01418
01419     term1 = term + *term;
01420     term2 = term1+1;
01421     *term2++ = REPLACEMENT;
01422     term2++; FILLFUN(term2)
01423     /*
01424     First we count the different types of objects
01425     */
01426     infoend = info + info[1];
01427     info1 = info + FUNHEAD;
01428     nfix = nwild = ngeneral = 0;
01429     while ( info1 < infoend ) {
01430         if ( *info1 == -SNUMBER ) {
01431             nfix++;
01432             info1 += 2; NEXTARG(info1)
01433         }
01434         else if ( *info1 <= -FUNCTION ) {
01435             if ( *info1 == -WILDARGFUN ) {
01436                 nwild++;
01437                 info1++; NEXTARG(info1)
01438             }
01439             else {
01440                 *term2++ = *info1++; COPY1ARG(term2,info1)
01441                 ngeneral++;
01442             }
01443         }
01444         else if ( *info1 == -INDEX ) {
01445             if ( info1[1] == WILDARGINDEX + AM.OffsetIndex ) {
01446                 nwild++;
01447                 info1 += 2; NEXTARG(info1)
01448             }
01449             else {
01450                 *term2++ = *info1++; *term2++ = *info1++; COPY1ARG(term2,info1)
01451                 ngeneral++;
01452             }
01453         }
01454         else if ( *info1 == -SYMBOL ) {

```

```

01455         if ( info1[1] == WILDARGSYMBOL ) {
01456             nwild++;
01457             info1 += 2; NEXTARG(info1)
01458         }
01459         else {
01460             *term2++ = *info1++; *term2++ = *info1++; COPY1ARG(term2,info1)
01461             ngeneral++;
01462         }
01463     }
01464     else if ( *info1 == -MINVECTOR || *info1 == -VECTOR ) {
01465         if ( info1[1] == WILDARGVECTOR + AM.OffsetVector ) {
01466             nwild++;
01467             info1 += 2; NEXTARG(info1)
01468         }
01469         else {
01470             *term2++ = *info1++; *term2++ = *info1++; COPY1ARG(term2,info1)
01471             ngeneral++;
01472         }
01473     }
01474     else {
01475         MLOCK(ErrorMessageLock);
01476         MesPrint("&irregular code found in replace transformation (RunReplace)");
01477         MUNLOCK(ErrorMessageLock);
01478         Terminate(-1);
01479     }
01480 }
01481 AT.WorkPointer = term2;
01482 *term1 = term2 - term1;
01483 term1[2] = *term1 - 1;
01484 /*
01485 And now stepping through the arguments
01486 */
01487 while ( t < tstop ) {
01488     n++; /* The number of the argument. Now check whether we need it */
01489     if ( TestArgNum(n,totarg,args) == 0 ) {
01490         if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01491             if ( *t <= -FUNCTION ) { *u++ = *t++; }
01492             else if ( *t < 0 ) { *u++ = *t++; *u++ = *t++; }
01493             else { i = *t; NCOPY(u,t,i) }
01494         }
01495         else *u++ = *t++;
01496         continue;
01497     }
01498     /*
01499 Here we have in info effectively a replace_ function, but with
01500 additionally the possibility of integer arguments. We treat those first
01501 and for the rest we have to do some pattern matching.
01502 Note that the compilation routine should check that there is an
01503 even number of arguments in the replace function.
01504
01505 First we go for number -> something
01506 */
01507 doanyway = 0;
01508 if ( nfix > 0 ) {
01509     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01510         if ( *t == -SNUMBER ) {
01511             info1 = info + FUNHEAD;
01512             while ( info1 < infoend ) {
01513                 if ( *info1 == -SNUMBER ) {
01514                     if ( info1[1] == t[1] ) {
01515                         if ( info1[2] == -SNUMBER ) {
01516                             *u++ = -SNUMBER; *u++ = info1[3];
01517                             info1 += 4;
01518                         }
01519                         else {
01520                             info1 += 2;
01521                             if ( info1[0] <= -FUNCTION ) i = 1;
01522                             else if ( info1[0] < 0 ) i = 2;
01523                             else i = *info1;
01524                             NCOPY(u,info1,i)
01525                         }
01526                         t += 2; goto nextt;
01527                     }
01528                     info1 += 2;
01529                     NEXTARG(info1);
01530                 }
01531                 else {
01532                     NEXTARG(info1);
01533                     NEXTARG(info1);
01534                 }
01535             }
01536             /*
01537 Here we had no match in the style of 1->2. It could however
01538 be that xarg_ does something
01539 */
01540 doanyway = 1; n2 = t[1];
01541         }

```

```

01542     }
01543     else { /* Tensor */
01544         if ( *t < AM.OffsetIndex && *t >= 0 ) {
01545             info1 = info + FUNHEAD;
01546             while ( info1 < infoend ) {
01547                 if ( (*info1 == -SNUMBER) && ( info1[1] == *t )
01548                     && ( ( info1[2] == -SNUMBER ) && ( info1[3] >= 0 )
01549                         && ( info1[3] < AM.OffsetIndex ) )
01550                     || ( info1[2] == -INDEX || info1[2] == -VECTOR
01551                         || info1[2] == -MINVECTOR ) ) ) {
01552                     *u++ = info1[3];
01553                     info1 += 4;
01554                     t++; goto nextt;
01555                 }
01556                 else {
01557                     NEXTARG(info1);
01558                     NEXTARG(info1);
01559                 }
01560             }
01561         }
01562     }
01563 }
01564 else if ( *t == -SNUMBER ) {
01565     doanyway = 1; n2 = t[1];
01566 }
01567 /*
01568 First we try to catch those elements that have an exact match
01569 in the traditional replace_ part.
01570 This means that *t should be less than zero and match an entry
01571 in the replace_ function that we prepared.
01572 */
01573 if ( ngeneral > 0 ) {
01574     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01575         if ( *t < 0 ) {
01576             term3 = term1 + *term1;
01577             term4 = term1 + FUNHEAD;
01578             while ( term4 < term3 ) {
01579                 if ( *term4 == *t && ( *t <= -FUNCTION ||
01580                     ( t[1] == term4[1] ) ) ) break;
01581                 NEXTARG(term4)
01582             }
01583             if ( term4 < term3 ) goto dothisnow;
01584         }
01585     }
01586     else {
01587         term3 = term1 + *term1;
01588         term4 = term1 + FUNHEAD;
01589         while ( term4 < term3 ) {
01590             if ( ( term4[1] == *t ) &&
01591                 ( ( *term4 == -INDEX || *term4 == -VECTOR ||
01592                   ( *term4 == -SYMBOL && term4[1] < AM.OffsetIndex
01593                     && term4[1] >= 0 ) ) ) ) break;
01594             NEXTARG(term4)
01595         }
01596         if ( term4 < term3 ) goto dothisnow;
01597     }
01598 }
01599 /*
01600 First we eliminate the fixed arguments and make a 'new info'
01601 If there is anything left we can continue.
01602 Now we look for whole argument wildcards (arg_, parg_, iarg_ or farg_)
01603 */
01604 if ( nwild > 0 ) {
01605     /*
01606         If we have f(a)*replace_(xarg_,b(xarg_)) this gives f(b(a))
01607         In testing the wildcard we have CheckWild do the work.
01608         This means that we have to set up the special variables
01609         (AT.WildMask,AN.WildValue,AN.NumWild)
01610     */
01611     wild[1] = 4;
01612     info1 = info + FUNHEAD;
01613     while ( info1 < infoend ) {
01614         if ( (*info1 == -SYMBOL && info1[1] == WILDARGSYMBOL
01615             && ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) ) ) {
01616             wild[0] = SYMTOSUB;
01617             wild[2] = WILDARGSYMBOL;
01618             wild[3] = 0;
01619             AN.WildValue = wild;
01620             AT.WildMask = &mask;
01621             mask = 0;
01622             AN.NumWild = 1;
01623             if ( *t == -SYMBOL || ( *t > 0 && CheckWild(BHEAD WILDARGSYMBOL,SYMTOSUB,1,t) == 0
01624                 || doanyway ) ) {
01625                 || doanyway ) {
01626             /*
01627                 We put the part in replace in a function and make

```

```

01628         a replace_(xarg_, (t argument)).
01629  */
01630         n1 = SYMBOL; n2 = WILDARGSYMBOL;
01631         info1 += 2;
01632 getthisone;;
01633         term3 = term2+1;
01634         if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01635             *term3++ = DUMFUN; term3++; FILLFUN(term3)
01636             COPY1ARG(term3,info1)
01637         }
01638         else {
01639             *term3++ = fun[0]; term3++; FILLFUN(term3)
01640             *term3++ = *info1;
01641         }
01642         term2[2] = term3 - term2 - 1;
01643         tt = term3;
01644         *term3++ = REPLACEMENT;
01645         term3++; FILLFUN(term3)
01646         *term3++ = -n1;
01647         if ( n1 < FUNCTION ) *term3++ = n2;
01648         if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01649             term4 = t;
01650             COPY1ARG(term3,term4)
01651         }
01652         else {
01653             *term3++ = *t;
01654         }
01655         tt[1] = term3 - tt;
01656         *term3++ = 1; *term3++ = 1; *term3++ = 3;
01657         *term2 = term3 - term2;
01658
01659         AT.WorkPointer = term3;
01660         NewSort(BHEAD0);
01661         if ( Generator(BHEAD term2,AR.Cnumlhs) ){
01662             LowerSortLevel();
01663             AT.WorkPointer = oldwork;
01664             AT.WildMask = oldmask;
01665             return(-1);
01666         }
01667         term4 = AT.WorkPointer;
01668         if ( EndSort(BHEAD term4,1) < 0 ) {}
01669         if ( ( *term4 && *(term4+*term4) != 0 ) || *term4 == 0 ) {
01670             MLOCK(ErrorMessageLock);
01671             MesPrint("&information in replace transformation does not evaluate into a
single term");
01672             MUNLOCK(ErrorMessageLock);
01673             return(-1);
01674         }
01675  */
01676         Now we can copy the new function argument to the output u
01677  */
01678         i = term4[2]-FUNHEAD;
01679         term3 = term4+FUNHEAD+1;
01680         NCOPY(u,term3,i)
01681         if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01682             NEXTARG(t)
01683         }
01684         else t++;
01685         AT.WorkPointer = term2;
01686
01687         goto nextt;
01688     }
01689     info1 += 2; NEXTARG(info1)
01690 }
01691 else if ( ( *info1 == -INDEX )
01692 && ( info[1] == WILDARGINDEX + AM.OffsetIndex ) ) {
01693     wild[0] = INDTO SUB;
01694     wild[2] = WILDARGINDEX+AM.OffsetIndex;
01695     wild[3] = 0;
01696     AN.WildValue = wild;
01697     AT.WildMask = &mask;
01698     mask = 0;
01699     AN.NumWild = 1;
01700     if ( ( functions[fun[0]-FUNCTION].spec == TENSORFUNCTION )
01701 || ( *t == -INDEX || ( *t > 0 && CheckWild(BHEAD WILDARGINDEX,INDTO SUB,1,t) == 0 )
01702 ) ) {
01703  */
01704         We put the part in replace in a function and make
a replace_(xarg_, (t argument)).
01705  */
01706         n1 = INDEX; n2 = WILDARGINDEX+AM.OffsetIndex;
01707         info1 += 2;
01708         goto getthisone;
01709     }
01710     info1 += 2; NEXTARG(info1)
01711 }
01712 else if ( ( *info1 == -VECTOR )

```

```

01713         && ( info1[1] == WILDARGVECTOR + AM.OffsetVector ) ) {
01714         wild[0] = VECTOSUB;
01715         wild[2] = WILDARGVECTOR+AM.OffsetVector;
01716         wild[3] = 0;
01717         AN.WildValue = wild;
01718         AT.WildMask = &mask;
01719         mask = 0;
01720         AN.NumWild = 1;
01721         if ( functions[fun[0]-FUNCTION].spec == TENSORFUNCTION ) {
01722             if ( *t < MINSPEC ) {
01723                 n1 = VECTOR; n2 = WILDARGVECTOR+AM.OffsetVector;
01724                 info1 += 2;
01725                 goto getthisone;
01726             }
01727         }
01728         else if ( *t == -VECTOR || *t == -MINVECTOR ||
01729             ( *t > 0 && CheckWild(BHEAD WILDARGVECTOR,VECTOSUB,1,t) == 0 ) ) {
01730             /*
01731                 We put the part in replace in a function and make
01732                 a replace_(xarg_,(t argument)).
01733             */
01734             n1 = VECTOR; n2 = WILDARGVECTOR+AM.OffsetVector;
01735             info1 += 2;
01736             goto getthisone;
01737         }
01738         info1 += 2; NEXTARG(info1)
01739     }
01740     else if ( *info1 == -WILDARGFUN ) {
01741         wild[0] = FUNTOFUN;
01742         wild[2] = WILDARGFUN;
01743         wild[3] = 0;
01744         AN.WildValue = wild;
01745         AT.WildMask = &mask;
01746         mask = 0;
01747         AN.NumWild = 1;
01748         if ( *t <= -FUNCTION || ( *t > 0 && CheckWild(BHEAD WILDARGFUN,FUNTOFUN,1,t) == 0
01749     ) ) {
01750             /*
01751                 We put the part in replace in a function and make
01752                 a replace_(xarg_,(t argument)).
01753             */
01754             n2 = n1 = -WILDARGFUN; /* n2 is to keep the compiler quiet */
01755             info1++;
01756             goto getthisone;
01757         }
01758         info1++; NEXTARG(info1)
01759     }
01760     else {
01761         NEXTARG(info1) NEXTARG(info1)
01762     }
01763 }
01764 if ( ngeneral > 0 ) {
01765     /*
01766         They are all in a replace_ function.
01767         Compose the whole thing into a term with replace_()*dum_(arg)
01768         which will be given to Generator.
01769         If we have f(a(x))*replace_(x,b) this gives f(a(b))
01770     */
01771     dothisnow;;
01772     term3 = term2; term4 = term1; i = *term1;
01773     NCOPY(term3,term4,i)
01774     term4 = term3;
01775     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01776         *term3++ = DUMFUN; term3++; FILLFUN(term3);
01777         tt = t;
01778         COPY1ARG(term3,tt)
01779     }
01780     else {
01781         *term3++ = fun[0]; term3++; FILLFUN(term3); *term3++ = *t;
01782     }
01783     term4[1] = term3-term4;
01784     *term3++ = 1; *term3++ = 1; *term3++ = 3;
01785     *term2 = term3-term2;
01786     AT.WorkPointer = term3;
01787     NewSort(BHEAD0);
01788     if ( Generator(BHEAD term2,AR.Cnumlhs) ) {
01789         LowerSortLevel();
01790         AT.WorkPointer = oldwork;
01791         AT.WildMask = oldmask;
01792         return(-1);
01793     }
01794     term4 = AT.WorkPointer;
01795     if ( EndSort(BHEAD term4,1) < 0 ) {}
01796     if ( ( *term4 && *(term4+*term4) != 0 ) || *term4 == 0 ) {
01797         MLOCK(ErrorMessageLock);
01798         MesPrint("&information in replace transformation does not evaluate into a single

```

```

    term");
01799             MUNLOCK(ErrorMessageLock);
01800             return(-1);
01801         }
01802     /*
01803         Now we can copy the new function argument to the output u
01804     */
01805         i = term4[2]-FUNHEAD;
01806         term3 = term4+FUNHEAD+1;
01807         NCOPY(u,term3,i)
01808         NEXTARG(t)
01809         AT.WorkPointer = term2;
01810
01811         goto nextt;
01812     }
01813
01814     /*
01815         No catch. Copy the argument and continue.
01816     */
01817         if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
01818             if ( *t <= -FUNCTION ) { *u++ = *t++; }
01819             else if ( *t < 0 ) { *u++ = *t++; *u++ = *t++; }
01820             else { i = *t; NCOPY(u,t,i) }
01821         }
01822         else {
01823             *u++ = *t++;
01824         }
01825     nextt++;
01826     }
01827     i = u - tstop; tstop[1] = i; tstop[2] = dirty;
01828     t = fun; u = tstop; NCOPY(t,u,i)
01829     AT.WorkPointer = oldwork;
01830     AT.WildMask = oldmask;
01831     return(0);
01832 }
01833
01834 /*
01835     #] RunReplace :
01836     #[ RunImplode :
01837
01838     Note that we restrict ourselves to short integers and/or single symbols
01839 */
01840
01841 int RunImplode(WORD *fun, WORD *args)
01842 {
01843     GETIDENTITY
01844     WORD *tt, *tstop, totarg, arg1, arg2, num1, num2, il, n;
01845     WORD *f, *t, *ttt, *t4, *ff, *fff;
01846     WORD moveup, numzero, outspace;
01847     if ( functions[fun[0]-FUNCTION].spec != 0 ) return(0);
01848     if ( *args != ARGRANGE ) {
01849         MLOCK(ErrorMessageLock);
01850         MesPrint("Illegal range encountered in RunImplode");
01851         MUNLOCK(ErrorMessageLock);
01852         Terminate(-1);
01853     }
01854     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
01855     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
01856     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
01857 /*
01858     Get the proper range in forward direction and the number of arguments
01859 */
01860     if ( arg1 > arg2 ) { num1 = arg2; num2 = arg1; }
01861     else { num1 = arg1; num2 = arg2; }
01862     if ( num1 > totarg || num2 > totarg ) return(0);
01863 /*
01864     We need, for the most general case 4 spots for each:
01865         x,pow,coef,sign
01866     Hence we put these in the workspace above the term after tstop
01867 */
01868     n = 1; f = fun+FUNHEAD;
01869     while ( n < num1 ) {
01870         if ( f >= tstop ) return(0);
01871         NEXTARG(f);
01872         n++;
01873     }
01874     ff = f;
01875 /*
01876     We are now at the first argument to be done
01877     Go through the terms and test their validity.
01878     If one of them doesn't conform to the rules we don't do anything.
01879     The terms to be done are put in special notation after the function.
01880     Notation: numsymbol, power, |coef|, sign
01881     If numsymbol is negative there is no symbol.
01882     We do it this way because otherwise stepping backwards (as in range=(4,1))
01883     would be very difficult.
01884 */

```

```

01885     tt = tstop;
01886     while ( n <= num2 ) {
01887         if ( f >= tstop ) return(0);
01888         if ( *f == -SNUMBER ) { *tt++ = -1; *tt++ = 0;
01889             if ( f[1] < 0 ) { *tt++ = -f[1]; *tt++ = -1; }
01890             else { *tt++ = f[1]; *tt++ = 1; }
01891             f += 2;
01892         }
01893         else if ( *f == -SYMBOL ) { *tt++ = f[1]; *tt++ = 1; *tt++ = 1; *tt++ = 1; f += 2; }
01894         else if ( *f < 0 ) return(0);
01895         else {
01896             if ( *f != ( f[ARGHEAD]+ARGHEAD ) ) return(0); /* Not a single term */
01897             t = f + *f - 1;
01898             i1 = ABS(*t);
01899             if ( ( i1 > 3 ) || ( t[-1] != 1 ) ) return(0); /* Not an integer or too big */
01900             if ( (UWORD)(t[-2]) > MAXPOSITIVE4 ) return(0); /* number too big */
01901             if ( f[ARGHEAD] == i1+1 ) { /* numerical which is fine */
01902                 *tt++ = -1; *tt++ = 0; *tt++ = t[-2];
01903                 if ( *t < 0 ) { *tt++ = -1; }
01904                 else { *tt++ = 1; }
01905             }
01906             else if ( ( f[ARGHEAD+1] != SYMBOL )
01907                 || ( f[ARGHEAD+2] != 4 )
01908                 || ( ( f+ARGHEAD+1+f[ARGHEAD+2] ) < ( t-i1 ) ) ) return(0);
01909                 /* not a single symbol with a coefficient */
01910             else {
01911                 *tt++ = f[ARGHEAD+3];
01912                 *tt++ = f[ARGHEAD+4];
01913                 *tt++ = t[-2];
01914                 if ( *t < 0 ) { *tt++ = -1; }
01915                 else { *tt++ = 1; }
01916             }
01917             f += *f;
01918         }
01919         n++;
01920     }
01921     fff = f;
01922     /*
01923     At this point we can do the implosion.
01924     Requirement: no coefficient shall take more than one word.
01925     (a stricter requirement may be needed to keep the explosion contained)
01926     */
01927     if ( arg1 > arg2 ) {
01928     /*
01929         Work backward.
01930     */
01931         t = tt - 4; numzero = 0;
01932         while ( t >= tstop ) {
01933             if ( t[2] == 0 ) numzero++;
01934             else {
01935                 if ( numzero > 0 ) {
01936                     t[2] += numzero;
01937                     t4 = t+4;
01938                     ttt = t4 + 4*numzero;
01939                     while ( ttt < tt ) *t4++ = *ttt++;
01940                     tt -= 4*numzero;
01941                     numzero = 0;
01942                 }
01943             }
01944             t -= 4;
01945         }
01946     }
01947     else {
01948         t = tstop;
01949         numzero = 0; ttt = t;
01950         while ( t < tt ) {
01951             if ( t[2] == 0 ) numzero++;
01952             else {
01953                 if ( numzero > 0 ) {
01954                     t[2] += numzero;
01955                     t4 = t;
01956                     while ( t4 < tt ) *ttt++ = *t4++;
01957                     tt -= 4*numzero;
01958                     t -= 4*numzero;
01959                     ttt = t + 4;
01960                     numzero = 0;
01961                 }
01962                 else {
01963                     ttt = t + 4;
01964                 }
01965             }
01966             t += 4;
01967         }
01968     /*
01969         We may have numzero > 0 at the end. We leave them.
01970         Output space is currently from tstop to tt
01971     */

```



```

01972     }
01973     /*
01974     Now we compute the real output space needed
01975     */
01976     t = tstop; outspace = 0;
01977     while ( t < tt ) {
01978         if ( t[0] == -1 ) {
01979             if ( t[2] > MAXPOSITIVE4 ) { return(0); /* Number too big */ }
01980             outspace += 2;
01981         }
01982         else if ( t[1] == 1 && t[2] == 1 && t[3] == 1 ) { outspace += 2; }
01983         else { outspace += 8 + ARGHEAD; }
01984         t += 4;
01985     }
01986     if ( outspace < (fff-ff) ) {
01987         t = tstop;
01988         while ( t < tt ) {
01989             if ( t[0] == -1 ) { *ff++ = -SNUMBER; *ff++ = t[2]*t[3]; }
01990             else if ( t[1] == 1 && t[2] == 1 && t[3] == 1 ) {
01991                 *ff++ = -SYMBOL; *ff++ = t[0];
01992             }
01993             else {
01994                 *ff++ = 8+ARGHEAD; *ff++ = 0; FILLARG(ff);
01995                 *ff++ = 8; *ff++ = SYMBOL; *ff++ = 4; *ff++ = t[0]; *ff++ = t[1];
01996                 *ff++ = t[2]; *ff++ = 1; *ff++ = t[3] > 0 ? 3: -3;
01997             }
01998             t += 4;
01999         }
02000         while ( fff < tstop ) *ff++ = *fff++;
02001         fun[1] = ff - fun;
02002     }
02003     else if ( outspace > (fff-ff) ) {
02004     /*
02005         Move the answer up by the required amount.
02006         Move the tail to its new location
02007         Move in things as for outspace == (fff-ff)
02008     */
02009         moveup = outspace-(fff-ff);
02010         ttt = tt + moveup;
02011         t = tt;
02012         while ( t > fff ) *--ttt = *--t;
02013         tt += moveup; tstop += moveup;
02014         fff += moveup;
02015         fun[1] += moveup;
02016         goto moveinto;
02017     }
02018     else {
02019     moveinto:
02020         t = tstop;
02021         while ( t < tt ) {
02022             if ( t[0] == -1 ) { *ff++ = -SNUMBER; *ff++ = t[2]*t[3]; }
02023             else if ( t[1] == 1 && t[2] == 1 && t[3] == 1 ) {
02024                 *ff++ = -SYMBOL; *ff++ = t[0];
02025             }
02026             else {
02027                 *ff++ = 8+ARGHEAD; *ff++ = 0; FILLARG(ff);
02028                 *ff++ = 8; *ff++ = SYMBOL; *ff++ = 4; *ff++ = t[0]; *ff++ = t[1];
02029                 *ff++ = t[2]; *ff++ = 1; *ff++ = t[3] > 0 ? 3: -3;
02030             }
02031             t += 4;
02032         }
02033     }
02034     return(0);
02035 }
02036
02037 /*
02038     #] RunImplode :
02039     #[ RunExplode :
02040 */
02041
02042 int RunExplode(PHEAD WORD *fun, WORD *args)
02043 {
02044     WORD arg1, arg2, num1, num2, *tt, *tstop, totarg, *tonew, *newfun;
02045     WORD *ff, *f;
02046     int reverse = 0, iarg, i, numzero;
02047     if ( functions[fun[0]-FUNCTION].spec != 0 ) return(0);
02048     if ( *args != ARGRANGE ) {
02049         MLOCK(ErrorMessageLock);
02050         MesPrint("Illegal range encountered in RunExplode");
02051         MUNLOCK(ErrorMessageLock);
02052         Terminate(-1);
02053     }
02054     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02055     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
02056     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02057 /*
02058     Get the proper range in forward direction and the number of arguments

```

```

02059 */
02060     if ( arg1 > arg2 ) { num1 = arg2; num2 = arg1; reverse = 1; }
02061     else { num1 = arg1; num2 = arg2; }
02062     if ( num1 > totarg || num2 > totarg ) return(0);
02063     if ( tstop + AM.MaxTer > AT.WorkTop ) goto OverWork;
02064 /*
02065     We will make the new function after the old one in the workspace
02066     Find the first argument
02067 */
02068     tonew = newfun = tstop;
02069     ff = fun + FUNHEAD; iarg = 0;
02070     while ( ff < tstop ) {
02071         iarg++;
02072         if ( iarg == num1 ) {
02073             i = ff - fun; f = fun;
02074             NCOPY(tonew,f,i)
02075             break;
02076         }
02077         NEXTARG(ff)
02078     }
02079 /*
02080     We have reached the first argument to be done
02081 */
02082     while ( iarg <= num2 ) {
02083         if ( *ff == -SYMBOL || ( *ff == -SNUMBER && ff[1] == 0 ) )
02084             { *tonew++ = *ff++; *tonew++ = *ff++; }
02085         else if ( *ff == -SNUMBER ) {
02086             numzero = ABS(ff[1])-1;
02087             if ( reverse ) {
02088                 *tonew++ = -SNUMBER; *tonew++ = ff[1] < 0 ? -1: 1;
02089                 while ( numzero > 0 ) {
02090                     *tonew++ = -SNUMBER; *tonew++ = 0; numzero--;
02091                 }
02092             }
02093             else {
02094                 while ( numzero > 0 ) {
02095                     *tonew++ = -SNUMBER; *tonew++ = 0; numzero--;
02096                 }
02097                 *tonew++ = -SNUMBER; *tonew++ = ff[1] < 0 ? -1: 1;
02098             }
02099             ff += 2;
02100         }
02101         else if ( *ff < 0 ) { return(0); }
02102         else {
02103             if ( *ff != ARGHEAD+8 || ff[ARGHEAD] != 8
02104                 || ff[ARGHEAD+1] != SYMBOL || ABS(ff[ARGHEAD+7]) != 3
02105                 || ff[ARGHEAD+6] != 1 ) return(0);
02106             numzero = ff[ARGHEAD+5];
02107             if ( numzero >= MAXPOSITIVE4 ) return(0);
02108             numzero--;
02109             if ( reverse ) {
02110                 if ( ff[ARGHEAD+7] > 0 ) { *tonew++ = -SNUMBER; *tonew++ = 1; }
02111                 else {
02112                     *tonew++ = ARGHEAD+8; *tonew++ = 0; FILLARG(tonew)
02113                     *tonew++ = 8; *tonew++ = SYMBOL; *tonew++ = ff[ARGHEAD+3];
02114                     *tonew++ = ff[ARGHEAD+4]; *tonew++ = 1; *tonew++ = 1;
02115                     *tonew++ = -3;
02116                 }
02117                 while ( numzero > 0 ) {
02118                     *tonew++ = -SNUMBER; *tonew++ = 0; numzero--;
02119                 }
02120             }
02121             else {
02122                 while ( numzero > 0 ) {
02123                     *tonew++ = -SNUMBER; *tonew++ = 0; numzero--;
02124                 }
02125                 *tonew++ = ARGHEAD+8; *tonew++ = 0; FILLARG(tonew)
02126                 *tonew++ = 8; *tonew++ = SYMBOL; *tonew++ = 4;
02127                 *tonew++ = ff[ARGHEAD+3]; *tonew++ = ff[ARGHEAD+4];
02128                 *tonew++ = 1; *tonew++ = 1;
02129                 if ( ff[ARGHEAD+7] > 0 ) *tonew++ = 3;
02130                 else *tonew++ = -3;
02131             }
02132             ff += *ff;
02133         }
02134         if ( tonew > AT.WorkTop ) goto OverWork;
02135         iarg++;
02136     }
02137 /*
02138     Copy the tail, settle the size and copy the whole thing back.
02139 */
02140     while ( ff < tstop ) *tonew++ = *ff++;
02141     i = newfun[1] = tonew-newfun;
02142     NCOPY(fun,newfun,i)
02143     return(0);
02144 OverWork:;
02145     MLOCK(ErrorMessageLock);

```

```

02146     MesWork();
02147     MUNLOCK(ErrorMessageLock);
02148     return(-1);
02149 }
02150
02151 /*
02152     #] RunExplode :
02153     #[ RunPermute :
02154 */
02155
02156 int RunPermute(PHEAD WORD *fun, WORD *args, WORD *info)
02157 {
02158     WORD *tt, totarg, *tstop, arg1, arg2, n, num, i, *f, *f1, *f2, *infostop;
02159     WORD *in, *iw, withdollar;
02160     DOLLARS d;
02161     if ( *args != ARGRANGE ) {
02162         MLOCK(ErrorMessageLock);
02163         MesPrint("Illegal range encountered in RunPermute");
02164         MUNLOCK(ErrorMessageLock);
02165         Terminate(-1);
02166     }
02167     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
02168         tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02169         while ( tt < tstop ) { totarg++; NEXTARG(tt); }
02170         arg1 = 1; arg2 = totarg;
02171     /*
02172         We need to:
02173         1: get pointers to the arguments
02174         2: permute the pointers
02175         3: copy the arguments to safe territory in the new order
02176         4: copy this new order back in situ.
02177     */
02178     num = arg2-arg1+1;
02179     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02180     f = fun+FUNHEAD; n = 1; i = 0;
02181     while ( n < arg1 ) { n++; NEXTARG(f) }
02182     f1 = f;
02183     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; NEXTARG(f) }
02184     /*
02185     Now the permutations
02186     */
02187     info++;
02188     while ( *info ) {
02189         infostop = info + *info;
02190         info++;
02191         if ( *info > totarg ) return(0);
02192     /*
02193     Now we have a look whether there are dollar variables to be expanded
02194     We also shift out all values that are out of range.
02195     */
02196     withdollar = 0; in = info;
02197     while ( in < infostop ) {
02198         if ( *in < 0 ) { /* Dollar variable -(number+1) */
02199             d = Dollars - *in - 1;
02200 #ifdef WITHPTHREADS
02201             {
02202                 int nummodopt, dtype = -1, numdollar = -*in-1;
02203                 if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
02204                     for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02205                         if ( numdollar == ModOptdollars[nummodopt].number ) break;
02206                     }
02207                     if ( nummodopt < NumModOptdollars ) {
02208                         dtype = ModOptdollars[nummodopt].type;
02209                         if ( dtype == MODLOCAL ) {
02210                             d = ModOptdollars[nummodopt].dstruct+AT.identity;
02211                         }
02212                         else {
02213                             LOCK(d->pthreadlockread);
02214                         }
02215                     }
02216                 }
02217             }
02218 #endif
02219             if ( ( d->type == DOLNUMBER || d->type == DOLTERMS )
02220                 && d->where[0] == 4 && d->where[4] == 0 ) {
02221                 if ( d->where[3] < 0 || d->where[2] != 1 || d->where[1] > totarg ) return(0);
02222             }
02223             else if ( d->type == DOLWILDARGS ) {
02224                 iw = d->where+1;
02225                 while ( *iw ) {
02226                     if ( *iw == -SNUMBER ) {
02227                         if ( iw[1] <= 0 || iw[1] > totarg ) return(0);
02228                     }
02229                     else goto IllType;
02230                     iw += 2;
02231                 }
02232             }

```

```

02233         else {
02234     Il1Type:
02235             MLOCK(ErrorMessageLock);
02236             MesPrint("Illegal type of $-variable in RunPermute");
02237             MUNLOCK(ErrorMessageLock);
02238             Terminate(-1);
02239         }
02240         withdollar++;
02241     }
02242     else if ( *in > totarg ) return(0);
02243     in++;
02244 }
02245 if ( withdollar ) { /* We need some space for a copy */
02246     WORD *incopy, *tocopy;
02247     incopy = TermMalloc("RunPermute");
02248     tocopy = incopy+1; in = info;
02249     while ( in < infostop ) {
02250         if ( *in < 0 ) {
02251             d = Dollars - *in - 1;
02252 #ifndef WITHPTHREADS
02253             {
02254                 int nummodopt, dtype = -1, numdollar = -*in-1;
02255                 if ( AS.MultiThreaded && ( AC.mparallelflag == PARALLELFLAG ) ) {
02256                     for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
02257                         if ( numdollar == ModOptdollars[nummodopt].number ) break;
02258                     }
02259                     if ( nummodopt < NumModOptdollars ) {
02260                         dtype = ModOptdollars[nummodopt].type;
02261                         if ( dtype == MODLOCAL ) {
02262                             d = ModOptdollars[nummodopt].dstruct+AT.identity;
02263                         }
02264                         else {
02265                             LOCK(d->pthreadlockread);
02266                         }
02267                     }
02268                 }
02269             }
02270 #endif
02271             if ( d->type == DOLNUMBER || d->type == DOLTERMS ) {
02272                 *tocopy++ = d->where[1] - 1;
02273             }
02274             else if ( d->type == DOLWILDARGS ) {
02275                 iw = d->where+1;
02276                 while ( *iw ) {
02277                     *tocopy++ = iw[1] - 1;
02278                     iw += 2;
02279                 }
02280             }
02281             in++;
02282         }
02283         else *tocopy++ = *in++;
02284     }
02285     *tocopy = 0;
02286     *incopy = tocopy - incopy;
02287     in = incopy+1;
02288     tt = AT.pWorkSpace[AT.pWorkPointer+*in];
02289     in++;
02290     while ( in < tocopy ) {
02291         if ( *in > totarg ) return(0);
02292         AT.pWorkSpace[AT.pWorkPointer+in[-1]] = AT.pWorkSpace[AT.pWorkPointer+*in];
02293         in++;
02294     }
02295     AT.pWorkSpace[AT.pWorkPointer+in[-1]] = tt;
02296     TermFree(incopy,"RunPermute");
02297     info = infostop;
02298 }
02299 else {
02300     tt = AT.pWorkSpace[AT.pWorkPointer+*info];
02301     info++;
02302     while ( info < infostop ) {
02303         if ( *info > totarg ) return(0);
02304         AT.pWorkSpace[AT.pWorkPointer+info[-1]] = AT.pWorkSpace[AT.pWorkPointer+*info];
02305         info++;
02306     }
02307     AT.pWorkSpace[AT.pWorkPointer+info[-1]] = tt;
02308 }
02309 }
02310 /*
02311     info++;
02312     while ( *info ) {
02313         infostop = info + *info;
02314         info++;
02315         if ( *info > totarg ) return(0);
02316         tt = AT.pWorkSpace[AT.pWorkPointer+*info];
02317         info++;
02318         while ( info < infostop ) {
02319             if ( *info > totarg ) return(0);

```

```

02320         AT.pWorkspace[AT.pWorkPointer+info[-1]] = AT.pWorkspace[AT.pWorkPointer+*info];
02321         info++;
02322     }
02323     AT.pWorkspace[AT.pWorkPointer+info[-1]] = tt;
02324 }
02325 /*
02326 /*
02327     And the final cleanup
02328 */
02329     if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
02330     f2 = tstop;
02331     for ( i = 0; i < num; i++ ) { f = AT.pWorkspace[AT.pWorkPointer+i]; COPY1ARG(f2,f) }
02332     i = f2 - tstop;
02333     NCOPY(f1,tstop,i)
02334 }
02335 else { /* tensors */
02336     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = tstop-tt;
02337     arg1 = 1; arg2 = totarg;
02338     num = arg2-arg1+1;
02339     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02340     f = fun+FUNHEAD; n = 1; i = 0;
02341     while ( n < arg1 ) { n++; f++; }
02342     f1 = f;
02343     while ( n <= arg2 ) { AT.pWorkspace[AT.pWorkPointer+i++] = f; n++; f++; }
02344 /*
02345     Now the permutations
02346 */
02347     info++;
02348     while ( *info ) {
02349         infostop = info + *info;
02350         info++;
02351         if ( *info > totarg ) return(0);
02352         tt = AT.pWorkspace[AT.pWorkPointer+*info];
02353         info++;
02354         while ( info < infostop ) {
02355             if ( *info > totarg ) return(0);
02356             AT.pWorkspace[AT.pWorkPointer+info[-1]] = AT.pWorkspace[AT.pWorkPointer+*info];
02357             info++;
02358         }
02359         AT.pWorkspace[AT.pWorkPointer+info[-1]] = tt;
02360     }
02361 /*
02362     And the final cleanup
02363 */
02364     if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
02365     f2 = tstop;
02366     for ( i = 0; i < num; i++ ) { f = AT.pWorkspace[AT.pWorkPointer+i]; *f2++ = *f++; }
02367     i = f2 - tstop;
02368     NCOPY(f1,tstop,i)
02369 }
02370 return(0);
02371 OverWork:;
02372 MLOCK(ErrorMessageLock);
02373 MesWork();
02374 MUNLOCK(ErrorMessageLock);
02375 return(-1);
02376 }
02377
02378 /*
02379     #] RunPermute :
02380     #[ RunReverse :
02381 */
02382
02383 int RunReverse(PHEAD WORD *fun, WORD *args)
02384 {
02385     WORD *tt, totarg, *tstop, arg1, arg2, n, num, i, *f, *f1, *f2, i1, i2;
02386     if ( *args != ARGRANGE ) {
02387         MLOCK(ErrorMessageLock);
02388         MesPrint("Illegal range encountered in RunReverse");
02389         MUNLOCK(ErrorMessageLock);
02390         Terminate(-1);
02391     }
02392     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
02393         tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02394         while ( tt < tstop ) { totarg++; NEXTARG(tt); }
02395         if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02396 /*
02397     We need to:
02398     1: get pointers to the arguments
02399     2: reverse the order of the pointers
02400     3: copy the arguments to safe territory in the new order
02401     4: copy this new order back in situ.
02402 */
02403     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
02404     if ( arg2 > totarg ) return(0);
02405
02406     num = arg2-arg1+1;

```

```

02407     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02408     f = fun+FUNHEAD; n = 1; i = 0;
02409     while ( n < arg1 ) { n++; NEXTARG(f) }
02410     f1 = f;
02411     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; NEXTARG(f) }
02412     i1 = i-1; i2 = 0;
02413     while ( i1 > i2 ) {
02414         tt = AT.pWorkSpace[AT.pWorkPointer+i1];
02415         AT.pWorkSpace[AT.pWorkPointer+i1] = AT.pWorkSpace[AT.pWorkPointer+i2];
02416         AT.pWorkSpace[AT.pWorkPointer+i2] = tt;
02417         i1--; i2++;
02418     }
02419     if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
02420     f2 = tstop;
02421     for ( i = 0; i < num; i++ ) { f = AT.pWorkSpace[AT.pWorkPointer+i]; COPY1ARG(f2,f) }
02422     i = f2 - tstop;
02423     NCOPY(f1,tstop,i)
02424 }
02425 else { /* Tensors */
02426     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = tstop - tt;
02427     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02428 /*
02429     We need to:
02430     1: get pointers to the arguments
02431     2: reverse the order of the pointers
02432     3: copy the arguments to safe territory in the new order
02433     4: copy this new order back in situ.
02434 */
02435     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
02436     if ( arg2 > totarg ) return(0);
02437
02438     num = arg2-arg1+1;
02439     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02440     f = fun+FUNHEAD; n = 1; i = 0;
02441     while ( n < arg1 ) { n++; f++; }
02442     f1 = f;
02443     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; f++; }
02444     i1 = i-1; i2 = 0;
02445     while ( i1 > i2 ) {
02446         tt = AT.pWorkSpace[AT.pWorkPointer+i1];
02447         AT.pWorkSpace[AT.pWorkPointer+i1] = AT.pWorkSpace[AT.pWorkPointer+i2];
02448         AT.pWorkSpace[AT.pWorkPointer+i2] = tt;
02449         i1--; i2++;
02450     }
02451     if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
02452     f2 = tstop;
02453     for ( i = 0; i < num; i++ ) { f = AT.pWorkSpace[AT.pWorkPointer+i]; *f2++ = *f++; }
02454     i = f2 - tstop;
02455     NCOPY(f1,tstop,i)
02456 }
02457 return(0);
02458 OverWork:;
02459     MLOCK(ErrorMessageLock);
02460     MesWork();
02461     MUNLOCK(ErrorMessageLock);
02462     return(-1);
02463 }
02464
02465 /*
02466     #] RunReverse :
02467     #[ RunDedup :
02468 */
02469
02470 int RunDedup(PHEAD WORD *fun, WORD *args)
02471 {
02472     WORD *tt, totarg, *tstop, arg1, arg2, n, i, j,k, *f, *f1, *f2, *fd, *fstart;
02473     if ( *args != ARGRANGE ) {
02474         MLOCK(ErrorMessageLock);
02475         MesPrint("Illegal range encountered in RunDedup");
02476         MUNLOCK(ErrorMessageLock);
02477         Terminate(-1);
02478     }
02479     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
02480         tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02481         while ( tt < tstop ) { totarg++; NEXTARG(tt); }
02482         if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02483
02484         if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
02485         if ( arg2 > totarg ) return(0);
02486
02487         f = fun+FUNHEAD; n = 1;
02488         while ( n < arg1 ) { n++; NEXTARG(f) }
02489         f1 = f; // fast forward to first element in range
02490         i = 0; // new argument count
02491         fstart = f1;
02492
02493         for (; n <= arg2; n++ ) {

```

```

02494     f2 = fstart;
02495     for ( j = 0; j < i; j++ ) { // check all previous terms
02496         fd = f2;
02497         NEXTARG(fd)
02498         for ( k = 0; k < fd-f2; k++ ) // byte comparison of args
02499             if ( f2[k] != f[k] ) break;
02500
02501         if ( k == fd-f2 ) break; // duplicate arg
02502         f2 = fd;
02503     }
02504
02505     if ( j == i ) {
02506         // unique factor, copy in situ
02507         COPY1ARG(f1,f)
02508         i++;
02509     } else {
02510         NEXTARG(f)
02511     }
02512 }
02513
02514 // move the terms from after the range
02515 for (j = n; j <= totarg; j++) {
02516     COPY1ARG(f1,f)
02517 }
02518
02519 fun[1] = f1 - fun; // resize function
02520 }
02521 else { /* Tensors */
02522     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = tstop - tt;
02523     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02524
02525     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
02526     if ( arg2 > totarg ) return(0);
02527
02528     f = fun+FUNHEAD;
02529     i = arg1; // new argument count
02530     n = i;
02531
02532     for (; n <= arg2; n++) {
02533         for ( j = arg1; j < i; j++ ) { // check all previous terms
02534             if ( f[n-1] == f[j-1] ) break; // duplicate arg
02535         }
02536
02537         if ( j == i ) {
02538             // unique factor, copy in situ
02539             f[i-1] = f[n-1];
02540             i++;
02541         }
02542     }
02543
02544     // move the terms from after the range
02545     for (j = n; j <= totarg; j++, i++) {
02546         f[i-1] = f[j-1];
02547     }
02548
02549     fun[1] = f + i - 1 - fun; // resize function
02550 }
02551 return(0);
02552 }
02553
02554 /*
02555     #] RunDedup :
02556     #[ RunCycle :
02557 */
02558
02559 int RunCycle(PHEAD WORD *fun, WORD *args, WORD *info)
02560 {
02561     WORD *tt, totarg, *tstop, arg1, arg2, n, num, i, j, *f, *f1, *f2, x, ncyc, cc;
02562     if ( *args != ARGRANGE ) {
02563         MLOCK(ErrorMessageLock);
02564         MesPrint("Illegal range encountered in RunCycle");
02565         MUNLOCK(ErrorMessageLock);
02566         Terminate(-1);
02567     }
02568     ncyc = info[1];
02569     if ( ncyc >= MAXPOSITIVE2 ) { /* $ variable */
02570         ncyc -= MAXPOSITIVE2;
02571         if ( ncyc >= MAXPOSITIVE4 ) {
02572             ncyc -= MAXPOSITIVE4; /* -$ */
02573             cc = -1;
02574         }
02575         else cc = 1;
02576         ncyc = DolToNumber(BHEAD ncyc);
02577         if ( AN.ErrorInDollar ) {
02578             MesPrint(" Error in Dollar variable in transform,cycle()=$");
02579             return(-1);
02580         }

```

```

02581         if ( ncyc >= MAXPOSITIVE4 || ncyc <= -MAXPOSITIVE4 ) {
02582             MesPrint(" Illegal value from Dollar variable in transform,cycle()=$");
02583             return(-1);
02584         }
02585         ncyc *= cc;
02586     }
02587     if ( functions[fun[0]-FUNCTION].spec != TENSORFUNCTION ) {
02588         tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02589         while ( tt < tstop ) { totarg++; NEXTARG(tt); }
02590         if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02591         if ( arg1 > arg2 ) { n = arg1; arg1 = arg2; arg2 = n; }
02592         if ( arg2 > totarg ) return(0);
02593     /*
02594     We need to:
02595         1: get pointers to the arguments
02596         2: cycle the pointers
02597         3: copy the arguments to safe territory in the new order
02598         4: copy this new order back in situ.
02599     */
02600     num = arg2-arg1+1;
02601     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02602     f = fun+FUNHEAD; n = 1; i = 0;
02603     while ( n < arg1 ) { n++; NEXTARG(f) }
02604     f1 = f;
02605     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; NEXTARG(f) }
02606     /*
02607     Now the cycle(s). First minimize the number of cycles.
02608     */
02609     x = ncyc;
02610     if ( x >= i ) {
02611         x %= i;
02612         if ( x > i/2 ) x -= i;
02613     }
02614     else if ( x <= -i ) {
02615         x = -((-x) % i);
02616         if ( x <= -i/2 ) x += i;
02617     }
02618     while ( x ) {
02619         if ( x > 0 ) {
02620             tt = AT.pWorkSpace[AT.pWorkPointer+i-1];
02621             for ( j = i-1; j > 0; j-- )
02622                 AT.pWorkSpace[AT.pWorkPointer+j] = AT.pWorkSpace[AT.pWorkPointer+j-1];
02623             AT.pWorkSpace[AT.pWorkPointer] = tt;
02624             x--;
02625         }
02626         else {
02627             tt = AT.pWorkSpace[AT.pWorkPointer];
02628             for ( j = 1; j < i; j++ )
02629                 AT.pWorkSpace[AT.pWorkPointer+j-1] = AT.pWorkSpace[AT.pWorkPointer+j];
02630             AT.pWorkSpace[AT.pWorkPointer+j-1] = tt;
02631             x++;
02632         }
02633     }
02634     /*
02635     And the final cleanup
02636     */
02637     if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
02638     f2 = tstop;
02639     for ( i = 0; i < num; i++ ) { f = AT.pWorkSpace[AT.pWorkPointer+i]; COPY1ARG(f2,f) }
02640     i = f2 - tstop;
02641     NCOPY(f1,tstop,i)
02642 }
02643 else { /* Tensors */
02644     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = tstop - tt;
02645     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02646     if ( arg1 > arg2 ) { n = arg1; arg1 = arg2; arg2 = n; }
02647     if ( arg2 > totarg ) return(0);
02648     /*
02649     We need to:
02650         1: get pointers to the arguments
02651         2: cycle the pointers
02652         3: copy the arguments to safe territory in the new order
02653         4: copy this new order back in situ.
02654     */
02655     num = arg2-arg1+1;
02656     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02657     f = fun+FUNHEAD; n = 1; i = 0;
02658     while ( n < arg1 ) { n++; f++; }
02659     f1 = f;
02660     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; f++; }
02661     /*
02662     Now the cycle(s). First minimize the number of cycles.
02663     */
02664     x = ncyc;
02665     if ( x >= i ) {
02666         x %= i;
02667         if ( x > i/2 ) x -= i;

```



```

02668     }
02669     else if ( x <= -i ) {
02670         x = -((-x) % i);
02671         if ( x <= -i/2 ) x += i;
02672     }
02673     while ( x ) {
02674         if ( x > 0 ) {
02675             tt = AT.pWorkspace[AT.pWorkPointer+i-1];
02676             for ( j = i-1; j > 0; j-- )
02677                 AT.pWorkspace[AT.pWorkPointer+j] = AT.pWorkspace[AT.pWorkPointer+j-1];
02678             AT.pWorkspace[AT.pWorkPointer] = tt;
02679             x--;
02680         }
02681         else {
02682             tt = AT.pWorkspace[AT.pWorkPointer];
02683             for ( j = 1; j < i; j++ )
02684                 AT.pWorkspace[AT.pWorkPointer+j-1] = AT.pWorkspace[AT.pWorkPointer+j];
02685             AT.pWorkspace[AT.pWorkPointer+j-1] = tt;
02686             x++;
02687         }
02688     }
02689     /*
02690     And the final cleanup
02691     */
02692     if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
02693     f2 = tstop;
02694     for ( i = 0; i < num; i++ ) { f = AT.pWorkspace[AT.pWorkPointer+i]; *f2++ = *f++; }
02695     i = f2 - tstop;
02696     NCOPY(f1,tstop,i)
02697 }
02698 return(0);
02699 OverWork:;
02700 MLOCK(ErrorMessageLock);
02701 MesWork();
02702 MUNLOCK(ErrorMessageLock);
02703 return(-1);
02704 }
02705
02706 /*
02707     #] RunCycle :
02708     #[ RunAddArg :
02709 */
02710
02711 int RunAddArg(PHEAD WORD *fun, WORD *args)
02712 {
02713     WORD *ttt, totarg, *tstop, arg1, arg2, n, num, *f, *f1, *f2;
02714     WORD scribble[10+ARGHEAD];
02715     LONG space;
02716     if ( *args != ARGGRANGE ) {
02717         MLOCK(ErrorMessageLock);
02718         MesPrint("Illegal range encountered in RunAddArg");
02719         MUNLOCK(ErrorMessageLock);
02720         Terminate(-1);
02721     }
02722     if ( functions[fun[0]-FUNCTION].spec == TENSORFUNCTION ) {
02723         MLOCK(ErrorMessageLock);
02724         MesPrint("Illegal attempt to add arguments of a tensor in AddArg");
02725         MUNLOCK(ErrorMessageLock);
02726         Terminate(-1);
02727     }
02728     ttt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02729     while ( ttt < tstop ) { totarg++; NEXTARG(ttt); }
02730     /* ignore functions with no arguments */
02731     if ( totarg == 0 ) return(0);
02732     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02733     /*
02734     We need to:
02735         1: establish that we actually need to add something
02736         2: start a sort
02737         3: if needed, convert arguments to long arguments
02738         4: send (terms in) argument to StoreTerm
02739         5: EndSort and copy the result back into the function
02740     Note that the function is in the workspace, above the term and no
02741     relevant information is trailing it.
02742     */
02743     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
02744     if ( arg2 > totarg ) return(0);
02745     num = arg2-arg1+1;
02746     if ( num == 1 ) return(0);
02747     f = fun+FUNHEAD; n = 1;
02748     while ( n < arg1 ) { n++; NEXTARG(f) }
02749     f1 = f;
02750     NewSort(BHEAD0);
02751     while ( n <= arg2 ) {
02752         if ( *f > 0 ) {
02753             f2 = f + *f; f += ARGHEAD;
02754             while ( f < f2 ) { StoreTerm(BHEAD f); f += *f; }

```

```

02755     }
02756     else if ( *f == -SNUMBER && f[1] == 0 ) {
02757         f+= 2;
02758     }
02759     else {
02760         ToGeneral(f,scribble,1);
02761         StoreTerm(BHEAD scribble);
02762         NEXTARG(f);
02763     }
02764     n++;
02765 }
02766 if ( EndSort(BHEAD tstop+ARGHEAD,1) < 0 ) return(-1);
02767 num = 0;
02768 f2 = tstop+ARGHEAD;
02769 while ( *f2 ) { f2 += *f2; num++; }
02770 *tstop = f2-tstop;
02771 for ( n = 1; n < ARGHEAD; n++ ) tstop[n] = 0;
02772 if ( num == 1 && ToFast(tstop,tstop) == 1 ) {
02773     f2 = tstop; NEXTARG(f2);
02774 }
02775 if ( *tstop == ARGHEAD ) {
02776     *tstop = -SNUMBER; tstop[1] = 0;
02777     f2 = tstop+2;
02778 }
02779 /*
02780 Copy the trailing arguments after the new argument, then copy the whole back.
02781 */
02782 while ( f < tstop ) *f2++ = *f++;
02783 while ( f < f2 ) *f1++ = *f++;
02784 space = f1 - fun;
02785 if ( (space+8)*sizeof(WORD) > (UWORD)AM.MaxTer ) {
02786     MLOCK(ErrorMessageLock);
02787     MesWork();
02788     MUNLOCK(ErrorMessageLock);
02789     return(-1);
02790 }
02791 fun[1] = (WORD)space;
02792 return(0);
02793 }
02794
02795 /*
02796 #] RunAddArg :
02797 #[ RunMulArg :
02798 */
02799
02800 int RunMulArg(PHEAD WORD *fun, WORD *args)
02801 {
02802     WORD *t, totarg, *tstop, arg1, arg2, n, *f, nb, *m, i, *w;
02803     WORD *scratch, argbuf[20], argsize, *where, *newterm;
02804     LONG oldcpointer_pos;
02805     CBUF *C = cbuf + AT.ebufnum;
02806     if ( *args != ARGGRANGE ) {
02807         MLOCK(ErrorMessageLock);
02808         MesPrint("Illegal range encountered in RunMulArg");
02809         MUNLOCK(ErrorMessageLock);
02810         Terminate(-1);
02811     }
02812     if ( functions[fun[0]-FUNCTION].spec == TENSORFUNCTION ) {
02813         MLOCK(ErrorMessageLock);
02814         MesPrint("Illegal attempt to multiply arguments of a tensor in MulArg");
02815         MUNLOCK(ErrorMessageLock);
02816         Terminate(-1);
02817     }
02818     t = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02819     while ( t < tstop ) { totarg++; NEXTARG(t); }
02820     /* ignore functions with no arguments */
02821     if ( totarg == 0 ) return(0);
02822     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02823     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
02824     if ( arg1 > totarg ) return(0);
02825     if ( arg2 < 1 ) return(0);
02826     if ( arg1 < 1 ) arg1 = 1;
02827     if ( arg2 > totarg ) arg2 = totarg;
02828     if ( arg1 == arg2 ) return(0);
02829     /*
02830     Now we move the arguments to a compiler buffer
02831     Then we create a term in the workspace that is the product of
02832     subexpression pointers to the objects in the compiler buffer.
02833     Next we let Generator work out that term.
02834     Finally we pick up the results from EndSort and put it in the function.
02835     */
02836     f = fun+FUNHEAD; n = 1;
02837     while ( n < arg1 ) { n++; NEXTARG(f) }
02838     t = f;
02839     if ( fun >= AT.WorkSpace && fun < AT.WorkTop ) {
02840         if ( AT.WorkPointer < fun+fun[1] ) AT.WorkPointer = fun+fun[1];
02841     }

```

```

02842     scratch = AT.WorkPointer;
02843     w = scratch+1;
02844     oldcpointer_pos = C->Pointer-C->Buffer;
02845     nb = C->numrhs;
02846     while ( n <= arg2 ) {
02847         if ( *t > 0 ) {
02848             argsize = *t - ARGHEAD; where = t + ARGHEAD; t += *t;
02849         }
02850         else if ( *t <= -FUNCTION ) {
02851             argbuf[0] = FUNHEAD+4; argbuf[1] = -*t++; argbuf[2] = FUNHEAD;
02852             for ( i = 2; i < FUNHEAD; i++ ) argbuf[i+1] = 0;
02853             argbuf[FUNHEAD+1] = 1;
02854             argbuf[FUNHEAD+2] = 1;
02855             argbuf[FUNHEAD+3] = 3;
02856             argsize = argbuf[0];
02857             where = argbuf;
02858         }
02859         else if ( *t == -SYMBOL ) {
02860             argbuf[0] = 8; argbuf[1] = SYMBOL; argbuf[2] = 4;
02861             argbuf[3] = t[1]; argbuf[4] = 1;
02862             argbuf[5] = 1; argbuf[6] = 1; argbuf[7] = 3;
02863             argsize = 8; t += 2;
02864             where = argbuf;
02865         }
02866         else if ( *t == -VECTOR || *t == -MINVECTOR ) {
02867             argbuf[0] = 7; argbuf[1] = INDEX; argbuf[2] = 3;
02868             argbuf[3] = t[1];
02869             argbuf[4] = 1; argbuf[5] = 1;
02870             if ( *t == -MINVECTOR ) argbuf[6] = -3;
02871             else argbuf[6] = 3;
02872             argsize = 7; t += 2;
02873             where = argbuf;
02874         }
02875         else if ( *t == -INDEX ) {
02876             argbuf[0] = 7; argbuf[1] = INDEX; argbuf[2] = 3;
02877             argbuf[3] = t[1];
02878             argbuf[4] = 1; argbuf[5] = 1; argbuf[6] = 3;
02879             argsize = 7; t += 2;
02880             where = argbuf;
02881         }
02882         else if ( *t == -SNUMBER ) {
02883             if ( t[1] < 0 ) {
02884                 argbuf[0] = 4; argbuf[1] = -t[1]; argbuf[2] = 1; argbuf[3] = -3;
02885             }
02886             else {
02887                 argbuf[0] = 4; argbuf[1] = t[1]; argbuf[2] = 1; argbuf[3] = 3;
02888             }
02889             argsize = 4; t += 2;
02890             where = argbuf;
02891         }
02892         else {
02893             /* unreachable */
02894             return(1);
02895         }
02896     /*
02897     Now add the argbuf to AT.ebufnum
02898     */
02899     m = AddRHS(AT.ebufnum,1);
02900     while ( (m + argsize + 10) > C->Top ) m = DoubleCbuffer(AT.ebufnum,m,17);
02901     for ( i = 0; i < argsize; i++ ) m[i] = where[i];
02902     m[i] = 0;
02903     C->Pointer = m + i + 1;
02904     n++;
02905     *w++ = SUBEXPRESSION; *w++ = SUBEXPSIZE; *w++ = C->numrhs; *w++ = 1;
02906     *w++ = AT.ebufnum; FILLSUB(w);
02907 }
02908 *w++ = 1; *w++ = 1; *w++ = 3;
02909 *scratch = w-scratch;
02910 AT.WorkPointer = w;
02911 NewSort(BHEAD0);
02912 Generator(BHEAD scratch,AR.Cnumlhs);
02913 newterm = AT.WorkPointer;
02914 EndSort(BHEAD newterm+ARGHEAD,1);
02915 C->Pointer = C->Buffer+oldcpointer_pos;
02916 C->numrhs = nb;
02917 w = newterm+ARGHEAD; while ( *w ) w += *w;
02918 *newterm = w-newterm; newterm[1] = 0;
02919 if ( ToFast(newterm,newterm) ) {
02920     if ( *newterm <= -FUNCTION ) w = newterm+1;
02921     else w = newterm+2;
02922 }
02923 while ( t < tstop ) *w++ = *t++;
02924 i = w - newterm;
02925 t = newterm; NCOPY(f,t,i);
02926 fun[1] = f-fun;
02927 AT.WorkPointer = scratch;
02928 if ( AT.WorkPointer > AT.WorkSpace && AT.WorkPointer < f ) AT.WorkPointer = f;

```

```

02929     return(0);
02930 }
02931
02932 /*
02933     #] RunMulArg :
02934     #[ RunIsLyndon :
02935
02936     Determines whether the range constitutes a Lyndon word.
02937     The two cases of ordering are distinguished by the order of
02938     the numbers of the arguments in the range.
02939 */
02940
02941 int RunIsLyndon(PHEAD WORD *fun, WORD *args, int par)
02942 {
02943     WORD *tt, totarg, *tstop, arg1, arg2, arg, num, *f, n, i;
02944     /* WORD *f1; */
02945     WORD sign, i1, i2, retval;
02946     if ( fun[0] <= GAMMASEVEN && fun[0] >= GAMMA ) return(0);
02947     if ( *args != ARGRANGE ) {
02948         MLOCK(ErrorMessageLock);
02949         MesPrint("Illegal range encountered in RunIsLyndon");
02950         MUNLOCK(ErrorMessageLock);
02951         Terminate(-1);
02952     }
02953     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
02954     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
02955     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
02956     if ( arg1 > totarg || arg2 > totarg ) return(-1);
02957     /*
02958     Now make a list of the relevant arguments.
02959     */
02960     if ( arg1 == arg2 ) return(1);
02961     if ( arg2 < arg1 ) { /* greater, rather than smaller */
02962         arg = arg1; arg1 = arg2; arg2 = arg; sign = 1;
02963     }
02964     else sign = 0;
02965
02966     num = arg2-arg1+1;
02967     WantAddPointers(num); /* Guarantees the presence of enough pointers */
02968     f = fun+FUNHEAD; n = 1; i = 0;
02969     while ( n < arg1 ) { n++; NEXTARG(f) }
02970     /* f1 = f; */
02971     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; NEXTARG(f) }
02972     /*
02973     If sign == 1 we should alter the order of the pointers first
02974     */
02975     if ( sign ) {
02976         i1 = i-1; i2 = 0;
02977         while ( i1 > i2 ) {
02978             tt = AT.pWorkSpace[AT.pWorkPointer+i1];
02979             AT.pWorkSpace[AT.pWorkPointer+i1] = AT.pWorkSpace[AT.pWorkPointer+i2];
02980             AT.pWorkSpace[AT.pWorkPointer+i2] = tt;
02981             i1--; i2++;
02982         }
02983     }
02984     /*
02985     The argument range is from f1 to f and the num pointers to the arguments
02986     are in AT.pWorkSpace[AT.pWorkPointer] to AT.pWorkSpace[AT.pWorkPointer+num-1]
02987     */
02988     for ( i1 = 1; i1 < num; i1++ ) {
02989         retval = par * CompArg(AT.pWorkSpace[AT.pWorkPointer+i1],
02990                               AT.pWorkSpace[AT.pWorkPointer]);
02991         if ( retval > 0 ) continue;
02992         if ( retval < 0 ) return(0);
02993         for ( i2 = 1; i2 < num; i2++ ) {
02994             retval = par * CompArg(AT.pWorkSpace[AT.pWorkPointer+(i1+i2)%num],
02995                                   AT.pWorkSpace[AT.pWorkPointer+i2]);
02996             if ( retval < 0 ) return(0);
02997             if ( retval > 0 ) goto nextil;
02998         }
02999     /*
03000     If we come here the sequence is not unique.
03001     */
03002     return(0);
03003 nextil;
03004     }
03005     return(1);
03006 }
03007
03008 /*
03009     #] RunIsLyndon :
03010     #[ RunToLyndon :
03011
03012     Determines whether the range constitutes a Lyndon word.
03013     If not, we rotate it to a Lyndon word. If this is not possible
03014     we return the noLyndon condition.
03015     The two cases of ordering are distinguished by the order of

```

```

03016         the numbers of the arguments in the range.
03017 */
03018
03019 WORD RunToLyndon(PHEAD WORD *fun, WORD *args, int par)
03020 {
03021     WORD *tt, totarg, *tstop, arg1, arg2, arg, num, *f, *f1, *f2, n, i;
03022     WORD sign, i1, i2, retval, unique;
03023     if ( fun[0] <= GAMMASEVEN && fun[0] >= GAMMA ) return(0);
03024     if ( *args != ARGRANGE ) {
03025         MLOCK(ErrorMessageLock);
03026         MesPrint("Illegal range encountered in RunToLyndon");
03027         MUNLOCK(ErrorMessageLock);
03028         Terminate(-1);
03029     }
03030     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
03031     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
03032     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
03033     if ( arg1 > totarg || arg2 > totarg ) return(-1);
03034 /*
03035     Now make a list of the relevant arguments.
03036 */
03037     if ( arg1 == arg2 ) return(1);
03038     if ( arg2 < arg1 ) { /* greater, rather than smaller */
03039         arg = arg1; arg1 = arg2; arg2 = arg; sign = 1;
03040     }
03041     else sign = 0;
03042
03043     num = arg2-arg1+1;
03044     WantAddPointers((2*num)); /* Guarantees the presence of enough pointers */
03045     f = fun+FUNHEAD; n = 1; i = 0;
03046     while ( n < arg1 ) { n++; NEXTARG(f) }
03047     f1 = f;
03048     while ( n <= arg2 ) { AT.pWorkSpace[AT.pWorkPointer+i++] = f; n++; NEXTARG(f) }
03049 /*
03050     If sign == 1 we should alter the order of the pointers first
03051 */
03052     if ( sign ) {
03053         i1 = i-1; i2 = 0;
03054         while ( i1 > i2 ) {
03055             tt = AT.pWorkSpace[AT.pWorkPointer+i1];
03056             AT.pWorkSpace[AT.pWorkPointer+i1] = AT.pWorkSpace[AT.pWorkPointer+i2];
03057             AT.pWorkSpace[AT.pWorkPointer+i2] = tt;
03058             i1--; i2++;
03059         }
03060     }
03061 /*
03062     The argument range is from f1 to f and the num pointers to the arguments
03063     are in AT.pWorkSpace[AT.pWorkPointer] to AT.pWorkSpace[AT.pWorkPointer+num-1]
03064 */
03065     unique = 1;
03066     for ( i1 = 1; i1 < num; i1++ ) {
03067         retval = par * CompArg(AT.pWorkSpace[AT.pWorkPointer+i1],
03068                               AT.pWorkSpace[AT.pWorkPointer]);
03069         if ( retval > 0 ) continue;
03070         if ( retval < 0 ) {
03071 Rotate:;
03072 /*
03073         Rotate so that i1 becomes the zero element. Then start again.
03074 */
03075         for ( i2 = 0; i2 < num; i2++ ) {
03076             AT.pWorkSpace[AT.pWorkPointer+num+i2] =
03077                 AT.pWorkSpace[AT.pWorkPointer+(i1+i2)%num];
03078         }
03079         for ( i2 = 0; i2 < num; i2++ ) {
03080             AT.pWorkSpace[AT.pWorkPointer+i2] =
03081                 AT.pWorkSpace[AT.pWorkPointer+i2+num];
03082         }
03083         i1 = 0;
03084         goto nextil;
03085     }
03086     for ( i2 = 1; i2 < num; i2++ ) {
03087         retval = par * CompArg(AT.pWorkSpace[AT.pWorkPointer+(i1+i2)%num],
03088                               AT.pWorkSpace[AT.pWorkPointer+i2]);
03089         if ( retval < 0 ) goto Rotate;
03090         if ( retval > 0 ) goto nextil;
03091     }
03092 /*
03093     If we come here the sequence is not unique.
03094 */
03095     unique = 0;
03096 nextil:;
03097 }
03098     if ( sign ) {
03099         i1 = i-1; i2 = 0;
03100         while ( i1 > i2 ) {
03101             tt = AT.pWorkSpace[AT.pWorkPointer+i1];
03102             AT.pWorkSpace[AT.pWorkPointer+i1] = AT.pWorkSpace[AT.pWorkPointer+i2];

```

```

03103         AT.pWorkSpace[AT.pWorkPointer+i2] = tt;
03104         i1--; i2++;
03105     }
03106 }
03107 /*
03108 Now rewrite the arguments into the proper order
03109 */
03110 if ( tstop+(f-f1) > AT.WorkTop ) goto OverWork;
03111 f2 = tstop;
03112 for ( i = 0; i < num; i++ ) { f = AT.pWorkSpace[AT.pWorkPointer+i]; COPY1ARG(f2,f) }
03113 i = f2 - tstop;
03114 NCOPY(f1,tstop,i)
03115 /*
03116 The return value indicates whether we have a Lyndon word
03117 */
03118 return(unique);
03119 OverWork:;
03120 MLOCK(ErrorMessageLock);
03121 MesWork();
03122 MUNLOCK(ErrorMessageLock);
03123 return(-2);
03124 }
03125
03126 /*
03127 #] RunToLyndon :
03128 #[ RunDropArg :
03129 */
03130
03131 int RunDropArg(PHEAD WORD *fun, WORD *args)
03132 {
03133     WORD *t, *tstop, *f, totarg, arg1, arg2, n;
03134
03135     t = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
03136     while ( t < tstop ) { totarg++; NEXTARG(t); }
03137     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
03138     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
03139     if ( arg1 > totarg ) return(0);
03140     if ( arg2 < 1 ) return(0);
03141     if ( arg1 < 1 ) arg1 = 1;
03142     if ( arg2 > totarg ) arg2 = totarg;
03143     f = fun+FUNHEAD; n = 1;
03144     while ( n < arg1 ) { n++; NEXTARG(f) }
03145     t = f;
03146     while ( n <= arg2 ) { n++; NEXTARG(t) }
03147     while ( t < tstop ) *f++ = *t++;
03148     fun[1] = f-fun;
03149     return(0);
03150 }
03151
03152 /*
03153 #] RunDropArg :
03154 #[ RunSelectArg :
03155 */
03156
03157 int RunSelectArg(PHEAD WORD *fun, WORD *args)
03158 {
03159     WORD *t, *tstop, *f, *tt, totarg, arg1, arg2, n;
03160
03161     t = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
03162     while ( t < tstop ) { totarg++; NEXTARG(t); }
03163     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
03164     if ( arg2 < arg1 ) { n = arg1; arg1 = arg2; arg2 = n; }
03165     if ( arg1 > totarg ) return(0);
03166     if ( arg2 < 1 ) return(0);
03167     if ( arg1 < 1 ) arg1 = 1;
03168     if ( arg2 > totarg ) arg2 = totarg;
03169     f = fun+FUNHEAD; n = 1; t = f;
03170     while ( n < arg1 ) { n++; NEXTARG(t) }
03171     while ( n <= arg2 ) {
03172         tt = t; NEXTARG(tt)
03173         while ( t < tt ) *f++ = *t++;
03174         n++;
03175     }
03176     fun[1] = f-fun;
03177     return(0);
03178 }
03179
03180 /*
03181 #] RunSelectArg :
03182 #[ RunZtoHArg :
03183 */
03184
03185 int RunZtoHArg(PHEAD WORD *fun, WORD *args)
03186 {
03187     WORD *tt, totarg, *tstop, arg1, arg2, n, i, *f, *f1;
03188     int sign = 0;
03189     WORD *t, *t1, *t2, *t3;

```

```

03190     if ( *args != ARGRANGE ) {
03191         MLOCK(ErrorMessageLock);
03192         MesPrint("Illegal range encountered in RunZtoHArg.");
03193         MUNLOCK(ErrorMessageLock);
03194         Terminate(-1);
03195     }
03196     if ( functions[fun[0]-FUNCTION].spec != 0 ) {
03197         MLOCK(ErrorMessageLock);
03198         MesPrint("The ZtoH transformation can only be executed on regular functions with nonzero
integer arguments.");
03199         MUNLOCK(ErrorMessageLock);
03200         Terminate(-1);
03201     }
03202     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
03203     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
03204     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
03205     /*
03206     Check the arguments. Should be -SNUMBER x!=0
03207     */
03208     f = fun+FUNHEAD; n = 1;
03209     while ( n < arg1 ) { n++; NEXTARG(f) }
03210     f1 = f;
03211     for ( i = arg1; i <= arg2; i++, f += 2 ) {
03212         if ( *f != -SNUMBER || f[1] == 0 ) return(-1);
03213     }
03214     /*
03215     Now we need a copy.
03216     */
03217     t = f1; t1 = t2 = tt = TermMalloc("RunZtoHArg");
03218     while ( t < f ) { *t1++ = *t++; *t1++ = *t++; }
03219     t = f1;
03220     while ( t2 < t1 ) {
03221         t += 2;
03222         if ( t2[1] < 0 ) {
03223             t3 = t;
03224             while ( t3 < f ) { t3[1] = -t3[1]; t3 += 2; }
03225         }
03226         t2 += 2;
03227     }
03228     TermFree(tt,"RunZtoHArg");
03229     /*
03230     Now the overall sign.
03231     */
03232     while ( f1 < f ) { if ( f1[1] < 0 ) sign = 1-sign; f1 += 2; }
03233     return(sign);
03234 }
03235
03236 /*
03237     #] RunZtoHArg :
03238     #[ RunHtoZArg :
03239     */
03240
03241 int RunHtoZArg(PHEAD WORD *fun, WORD *args)
03242 {
03243     WORD *tt, totarg, *tstop, arg1, arg2, n, i, *f, *f1, *f2;
03244     int sign = 0;
03245     WORD *t, *t1, *t2;
03246     if ( *args != ARGRANGE ) {
03247         MLOCK(ErrorMessageLock);
03248         MesPrint("Illegal range encountered in RunZtoHArg.");
03249         MUNLOCK(ErrorMessageLock);
03250         Terminate(-1);
03251     }
03252     if ( functions[fun[0]-FUNCTION].spec != 0 ) {
03253         MLOCK(ErrorMessageLock);
03254         MesPrint("The HtoZ transformation can only be executed on regular functions with nonzero
integer arguments.");
03255         MUNLOCK(ErrorMessageLock);
03256         Terminate(-1);
03257     }
03258     tt = fun+FUNHEAD; tstop = fun+fun[1]; totarg = 0;
03259     while ( tt < tstop ) { totarg++; NEXTARG(tt); }
03260     if ( FindRange(BHEAD args,&arg1,&arg2,totarg) ) return(-1);
03261     /*
03262     Check the arguments. Should be -SNUMBER x!=0
03263     */
03264     f = fun+FUNHEAD; n = 1;
03265     while ( n < arg1 ) { n++; NEXTARG(f) }
03266     f2 = f1 = f;
03267     for ( i = arg1; i <= arg2; i++, f += 2 ) {
03268         if ( *f != -SNUMBER || f[1] == 0 ) return(-1);
03269     }
03270     /*
03271     First the overall sign.
03272     */
03273     while ( f2 < f ) { if ( f2[1] < 0 ) sign = 1-sign; f2 += 2; }
03274     /*

```

```

03275     Now we need a copy.
03276 */
03277     t = f1; t1 = tt = TermMalloc("RunHtoZArg");
03278     while ( t < f ) { *t1++ = *t++; *t1++ = *t++; }
03279 /*
03280     Now the transformation.
03281 */
03282     t = f1; t2 = tt + 2;
03283     while ( t2 < t1 ) {
03284         t += 2;
03285         if ( t2[-1] < 0 ) t[1] = -t[1];
03286         t2 += 2;
03287     }
03288     TermFree(tt,"RunHtoZArg");
03289     return(sign);
03290 }
03291
03292 /*
03293     #] RunHtoZArg :
03294     #[ TestArgNum :
03295
03296     Looks whether argument n is contained in any of the ranges
03297     specified in args. Args contains objects of the types
03298         ALLARGS
03299         NUMARG,num
03300         ARGRANGE,num1,num2
03301     The object MAKEARGS,num1,num2 is skipped
03302     Any other object terminates the range specifications.
03303
03304     Currently only ARGRANGE is used (10-may-2016)
03305 */
03306
03307 int TestArgNum(int n, int totarg, WORD *args)
03308 {
03309     GETIDENTITY
03310     WORD x1, x2;
03311     for(;;) {
03312         switch ( *args ) {
03313             case ALLARGS:
03314                 return(1);
03315             case NUMARG:
03316                 if ( n == args[1] ) return(1);
03317                 if ( args[1] >= MAXPOSITIVE4 ) {
03318                     x1 = args[1]-MAXPOSITIVE4;
03319                     if ( totarg-x1 == n ) return(1);
03320                 }
03321                 args += 2;
03322                 break;
03323             case ARGRANGE:
03324                 if ( args[1] >= MAXPOSITIVE2 ) {
03325                     x1 = args[1] - MAXPOSITIVE2;
03326                     if ( x1 > MAXPOSITIVE4 ) {
03327                         x1 = x1 - MAXPOSITIVE4;
03328                         x1 = DolToNumber(BHEAD x1);
03329                         x1 = totarg - x1;
03330                     }
03331                     else {
03332                         x1 = DolToNumber(BHEAD x1);
03333                     }
03334                 }
03335                 else if ( args[1] >= MAXPOSITIVE4 ) {
03336                     x1 = totarg-(args[1]-MAXPOSITIVE4);
03337                 }
03338                 else x1 = args[1];
03339                 if ( args[2] >= MAXPOSITIVE2 ) {
03340                     x2 = args[2] - MAXPOSITIVE2;
03341                     if ( x2 > MAXPOSITIVE4 ) {
03342                         x2 = x2 - MAXPOSITIVE4;
03343                         x2 = DolToNumber(BHEAD x2);
03344                         x2 = totarg - x2;
03345                     }
03346                     else {
03347                         x2 = DolToNumber(BHEAD x2);
03348                     }
03349                 }
03350                 else if ( args[2] >= MAXPOSITIVE4 ) {
03351                     x2 = totarg-(args[2]-MAXPOSITIVE4);
03352                 }
03353                 else x2 = args[2];
03354                 if ( x1 >= x2 ) {
03355                     if ( n >= x2 && n <= x1 ) return(1);
03356                 }
03357                 else {
03358                     if ( n >= x1 && n <= x2 ) return(1);
03359                 }
03360                 args += 3;
03361                 break;

```



```

03362         case MAKEARGS:
03363             args += 3;
03364             break;
03365         default:
03366             return(0);
03367     }
03368 }
03369 }
03370
03371 /*
03372     #] TestArgNum :
03373     #[ PutArgInScratch :
03374 */
03375
03376 WORD PutArgInScratch(WORD *arg, UWORD *scrat)
03377 {
03378     WORD size, *t, i;
03379     if ( *arg == -SNUMBER ) {
03380         scrat[0] = ABS(arg[1]);
03381         if ( arg[1] < 0 ) size = -1;
03382         else size = 1;
03383     }
03384     else {
03385         t = arg+*arg-1;
03386         if ( *t < 0 ) { i = ((-t)-1)/2; size = -i; }
03387         else { i = ( *t -1)/2; size = i; }
03388         t = arg+ARGHEAD+1;
03389         NCOPY(scrat,t,i);
03390     }
03391     return(size);
03392 }
03393
03394 /*
03395     #] PutArgInScratch :
03396     #[ ReadRange :
03397
03398     Comes in at the bracket and leaves at the = sign
03399     Ranges can be:
03400     #1,#2 with # numbers. If the second is smaller than the
03401         first we work it backwards.
03402     first,#2 or #2,first
03403     #1,last or last,#1
03404     first,last or last,first
03405     First is represented by 1. Last is represented by MAXPOSITIVE4.
03406
03407     par = 0: we need the = after.
03408     par = 1: we need a , or '\0' after.
03409     par = 2: we need a :
03410 */
03411
03412 UBYTE *ReadRange(UBYTE *s, WORD *out, int par)
03413 {
03414     UBYTE *in = s, *ss, c;
03415     LONG x1, x2;
03416
03417     SKIPBRA3(in)
03418     if ( par == 0 && in[1] != '=' ) {
03419         MesPrint("%A range in this type of transform statement should be followed by an = sign");
03420         return(0);
03421     }
03422     else if ( par == 1 && in[1] != ',' && in[1] != '\0' ) {
03423         MesPrint("%A range in this type of transform statement should be followed by a comma or
end-of-statement");
03424         return(0);
03425     }
03426     else if ( par == 2 && in[1] != ':' ) {
03427         MesPrint("%A range in this type of transform statement should be followed by a :");
03428         return(0);
03429     }
03430     s++;
03431     if ( FG.cTable[*s] == 0 ) {
03432         ss = s; while ( FG.cTable[*s] == 0 ) s++;
03433         c = *s; *s = 0;
03434         if ( StrICmp(ss, (UBYTE *)"first") == 0 ) {
03435             *s = c;
03436             x1 = 1;
03437         }
03438         else if ( StrICmp(ss, (UBYTE *)"last") == 0 ) {
03439             *s = c;
03440             if ( c == '-' ) {
03441                 s++;
03442                 if ( *s == '$' ) {
03443                     s++; ss = s;
03444                     while ( FG.cTable[*s] == 0 || FG.cTable[*s] == 1 ) s++;
03445                     c = *s; *s = 0;
03446                     if ( ( x1 = GetDollar(ss) ) < 0 ) goto Error;
03447                     *s = c;

```

```

03448         x1 += MAXPOSITIVE2;
03449     }
03450     else {
03451         x1 = 0;
03452         while ( *s >= '0' && *s <= '9' ) {
03453             x1 = 10*x1 + *s++ - '0';
03454             if ( x1 >= MAXPOSITIVE4 ) {
03455                 MesPrint("&Fixed range indicator bigger than %1", (LONG)MAXPOSITIVE4);
03456                 return(0);
03457             }
03458         }
03459     }
03460     x1 += MAXPOSITIVE4;
03461 }
03462 else x1 = MAXPOSITIVE4;
03463 }
03464 else {
03465     MesPrint("&Illegal keyword inside range specification");
03466     return(0);
03467 }
03468 }
03469 else if ( FG.cTable[*s] == 1 ) {
03470     x1 = 0;
03471     while ( *s >= '0' && *s <= '9' ) {
03472         x1 = x1*10 + *s++ - '0';
03473         if ( x1 >= MAXPOSITIVE4 ) {
03474             MesPrint("&Fixed range indicator bigger than %1", (LONG)MAXPOSITIVE4);
03475             return(0);
03476         }
03477     }
03478 }
03479 else if ( *s == '$' ) {
03480     s++; ss = s;
03481     while ( FG.cTable[*s] == 0 || FG.cTable[*s] == 1 ) s++;
03482     c = *s; *s = 0;
03483     if ( ( x1 = GetDollar(ss) ) < 0 ) goto Error;
03484     *s = c;
03485     x1 += MAXPOSITIVE2;
03486 }
03487 else {
03488     MesPrint("&Illegal character in range specification");
03489     return(0);
03490 }
03491 if ( *s != ',' ) {
03492     MesPrint("&A range is two indicators, separated by a comma or blank");
03493     return(0);
03494 }
03495 s++;
03496 if ( FG.cTable[*s] == 0 ) {
03497     ss = s; while ( FG.cTable[*s] == 0 ) s++;
03498     c = *s; *s = 0;
03499     if ( StrICmp(ss, (UBYTE *)"first") == 0 ) {
03500         *s = c;
03501         x2 = 1;
03502     }
03503     else if ( StrICmp(ss, (UBYTE *)"last") == 0 ) {
03504         *s = c;
03505         if ( c == '-' ) {
03506             s++;
03507             if ( *s == '$' ) {
03508                 s++; ss = s;
03509                 while ( FG.cTable[*s] == 0 || FG.cTable[*s] == 1 ) s++;
03510                 c = *s; *s = 0;
03511                 if ( ( x2 = GetDollar(ss) ) < 0 ) goto Error;
03512                 *s = c;
03513                 x2 += MAXPOSITIVE2;
03514             }
03515             else {
03516                 x2 = 0;
03517                 while ( *s >= '0' && *s <= '9' ) {
03518                     x2 = 10*x2 + *s++ - '0';
03519                     if ( x2 >= MAXPOSITIVE4 ) {
03520                         MesPrint("&Fixed range indicator bigger than %1", (LONG)MAXPOSITIVE4);
03521                         return(0);
03522                     }
03523                 }
03524             }
03525             x2 += MAXPOSITIVE4;
03526         }
03527         else x2 = MAXPOSITIVE4;
03528     }
03529     else {
03530         MesPrint("&Illegal keyword inside range specification");
03531         return(0);
03532     }
03533 }
03534 else if ( FG.cTable[*s] == 1 ) {

```

```

03535         x2 = 0;
03536         while ( *s >= '0' && *s <= '9' ) {
03537             x2 = x2*10 + *s++ - '0';
03538             if ( x2 >= MAXPOSITIVE4 ) {
03539                 MesPrint("&Fixed range indicator bigger than %1", (LONG)MAXPOSITIVE4);
03540                 return(0);
03541             }
03542         }
03543     }
03544     else if ( *s == '$' ) {
03545         s++; ss = s;
03546         while ( FG.cTable[*s] == 0 || FG.cTable[*s] == 1 ) s++;
03547         c = *s; *s = 0;
03548         if ( ( x2 = GetDollar(ss) ) < 0 ) goto Error;
03549         *s = c;
03550         x2 += MAXPOSITIVE2;
03551     }
03552     else {
03553         MesPrint("&Illegal character in range specification");
03554         return(0);
03555     }
03556     if ( s < in ) {
03557         MesPrint("&A range is two indicators, separated by a comma or blank between parentheses");
03558         return(0);
03559     }
03560     out[0] = x1; out[1] = x2;
03561     return(in+1);
03562 Error:
03563     MesPrint("&Undefined variable %s in range",ss);
03564     return(0);
03565 }
03566 /*
03567     #] ReadRange :
03568     #[ FindRange :
03569 */
03570
03571 int FindRange(PHEAD WORD *args, WORD *arg1, WORD *arg2, WORD totarg)
03572 {
03573     WORD n[2], fromlast, i;
03574     for ( i = 0; i < 2; i++ ) {
03575         n[i] = args[i+1];
03576         fromlast = 0;
03577         if ( n[i] >= MAXPOSITIVE2 ) { /* This is a dollar variable */
03578             n[i] -= MAXPOSITIVE2;
03579             if ( n[i] >= MAXPOSITIVE4 ) {
03580                 fromlast = 1;
03581                 n[i] -= MAXPOSITIVE4; /* Now we have the number of the dollar variable */
03582             }
03583             n[i] = DolToNumber(BHEAD n[i]);
03584             if ( AN.ErrorInDollar ) {
03585                 MLOCK(ErrorMessageLock);
03586                 MesPrint("&Illegal $ value in range while executing transform statement.");
03587                 MUNLOCK(ErrorMessageLock);
03588                 return(-1);
03589             }
03590             if ( fromlast ) n[i] = totarg-n[i];
03591         }
03592         else if ( n[i] >= MAXPOSITIVE4 ) { n[i] = totarg-(n[i]-MAXPOSITIVE4); }
03593         if ( n[i] <= 0 ) {
03594             MLOCK(ErrorMessageLock);
03595             MesPrint("&Illegal non-positive value in range (%d) while executing transform statement.",
03596 i+1);
03597             MUNLOCK(ErrorMessageLock);
03598             return(-1);
03599         }
03600     }
03601     *arg1 = n[0];
03602     *arg2 = n[1];
03603     return(0);
03604 }
03605 /*
03606     #] FindRange :
03607     #] Transform :
03608 */

```

4.155 unix.h File Reference

Macros

- #define [LINEFEED](#) '\n'

- `#define CARRIAGERETURN 0x0D`
- `#define WITHPIPE`
- `#define WITHSYSTEM`
- `#define WITHEXTERNALCHANNEL`
- `#define TRAP SIGNALS`
- `#define P_term(code) exit(((int)(code<0?-code:code))`
- `#define SEPARATOR '/'`
- `#define ALTSEPARATOR '/'`
- `#define PATHSEPARATOR ':'`
- `#define WITH_ENV`
- `#define WITH_ALARM`

4.155.1 Detailed Description

Settings for Unix-like systems.

Definition in file [unix.h](#).

4.155.2 Macro Definition Documentation

4.155.2.1 LINEFEED

```
#define LINEFEED '\n'
```

Definition at line 33 of file [unix.h](#).

4.155.2.2 CARRIAGERETURN

```
#define CARRIAGERETURN 0x0D
```

Definition at line 34 of file [unix.h](#).

4.155.2.3 WITHPIPE

```
#define WITHPIPE
```

Definition at line 36 of file [unix.h](#).

4.155.2.4 WITHSYSTEM

```
#define WITHSYSTEM
```

Definition at line 37 of file [unix.h](#).

4.155.2.5 WITHEXTERNALCHANNEL

```
#define WITHEXTERNALCHANNEL
```

Definition at line 46 of file [unix.h](#).

4.155.2.6 TRAP SIGNALS

```
#define TRAP SIGNALS
```

Definition at line 49 of file [unix.h](#).

4.155.2.7 P_term

```
#define P_term(  
    code ) exit((int) (code<0?-code:code))
```

Definition at line 52 of file [unix.h](#).

4.155.2.8 SEPARATOR

```
#define SEPARATOR '/'
```

Definition at line 54 of file [unix.h](#).

4.155.2.9 ALTSEPARATOR

```
#define ALTSEPARATOR '/'
```

Definition at line 55 of file [unix.h](#).

4.155.2.10 PATHSEPARATOR

```
#define PATHSEPARATOR ':'
```

Definition at line 56 of file [unix.h](#).

4.155.2.11 WITH_ENV

```
#define WITH_ENV
```

Definition at line 57 of file [unix.h](#).

4.155.2.12 WITH_ALARM

```
#define WITH_ALARM
```

Definition at line 58 of file [unix.h](#).

4.156 unix.h


[Go to the documentation of this file.](#)

```
00001
00006 /* #[ License : */
00007 /*
00008 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00009 * When using this file you are requested to refer to the publication
00010 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00011 * This is considered a matter of courtesy as the development was paid
00012 * for by FOM the Dutch physics granting agency and we would like to
00013 * be able to track its scientific use to convince FOM of its value
00014 * for the community.
00015 *
00016 * This file is part of FORM.
00017 *
00018 * FORM is free software: you can redistribute it and/or modify it under the
00019 * terms of the GNU General Public License as published by the Free Software
00020 * Foundation, either version 3 of the License, or (at your option) any later
00021 * version.
00022 *
00023 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00024 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00025 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00026 * details.
00027 *
00028 * You should have received a copy of the GNU General Public License along
00029 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00030 */
00031 /* #[ License : */
00032
00033 #define LINEFEED '\n'
00034 #define CARRIAGEReturn 0x0D
00035
00036 #define WITHPIPE
00037 #define WITHSYSTEM
00038
00039 /*[13jul2005 mt]:*/
00040 /*With SAFESIGNAL defined, write() and read() syscalls are wrapped by
00041 the errno checkup*/
00042 /*#define SAFESIGNAL*/
00043 /*:[13jul2005 mt]*/
00044
00045 /*[29apr2004 mt]:*/
00046 #define WITHEXTERNALCHANNEL
00047 /*
00048 */
00049 #define TRAPsignals
00050 /*:[29apr2004 mt]*/
00051
00052 #define P_term(code) exit((int)(code<0?-code:code))
00053
00054 #define SEPARATOR '/'
00055 #define ALTSEPARATOR '/'
00056 #define PATHSEPARATOR ':'
00057 #define WITH_ENV
00058 #define WITH_ALARM
```

4.157 unixfile.c File Reference

```
#include "form3.h"
```

Include dependency graph for unixfile.c:

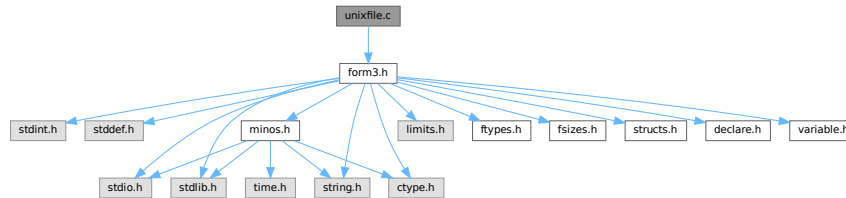

4.157.1 Detailed Description

The interface to a fast variety of file routines in the unix system.

Definition in file [unixfile.c](#).

4.158 unixfile.c

[Go to the documentation of this file.](#)

```

00001
00005 /* #[] License : */
00006 /*
00007  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00008  * When using this file you are requested to refer to the publication
00009  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00010  * This is considered a matter of courtesy as the development was paid
00011  * for by FOM the Dutch physics granting agency and we would like to
00012  * be able to track its scientific use to convince FOM of its value
00013  * for the community.
00014  *
00015  * This file is part of FORM.
00016  *
00017  * FORM is free software: you can redistribute it and/or modify it under the
00018  * terms of the GNU General Public License as published by the Free Software
00019  * Foundation, either version 3 of the License, or (at your option) any later
00020  * version.
00021  *
00022  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00023  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00024  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00025  * details.
00026  *
00027  * You should have received a copy of the GNU General Public License along
00028  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00029  */
00030 /* #[] License : */
00031 /*
00032  * #[] Includes :
00033  *
00034  * File with direct interface to the UNIX functions.
00035  * This makes a big difference in speed!
00036  */
00037 #include "form3.h"
00038
00039
00040 /*[13jul2005 mt]:*/
00041 #ifdef SAFESIGNAL
00042 /*[15oct2004 mt]:*/
00043 /*To access errno variable and EINTR constant:*/
00044 #include <errno.h>
00045 /*:[15oct2004 mt]:*/

```

```

00046 #endif
00047 /*:[13jul2005 mt]*/
00048
00049 #ifdef UFILES
00050
00051 FILES TheStdout = { 1 };
00052 FILES *Ustdout = &TheStdout;
00053
00054 #ifdef GPP
00055 extern "C" open();
00056 extern "C" close();
00057 extern "C" read();
00058 extern "C" write();
00059 extern "C" lseek();
00060 #endif
00061
00062 /*
00063  #] Includes :
00064  #[ Uopen :
00065  */
00066
00067 FILES *Uopen(char *filename, char *mode)
00068 {
00069     FILES *f = (FILES *)Malloc1(sizeof(FILES), "Uopen");
00070     int flags = 0, rights = 0644;
00071     while ( *mode ) {
00072         if ( *mode == 'r' ) { flags |= O_RDONLY; }
00073         else if ( *mode == 'w' ) { flags |= O_CREAT | O_TRUNC; }
00074         else if ( *mode == 'a' ) { flags |= O_APPEND; }
00075         else if ( *mode == 'b' ) { }
00076         else if ( *mode == '+' ) { flags |= O_RDWR; }
00077         mode++;
00078     }
00079     f->descriptor = open(filename, flags, rights);
00080     if ( f->descriptor >= 0 ) return(f);
00081     if ( ( flags & O_APPEND ) != 0 ) {
00082         flags |= O_CREAT;
00083         f->descriptor = open(filename, flags, rights);
00084         if ( f->descriptor >= 0 ) return(f);
00085     }
00086     M_free(f, "Uopen");
00087     return(0);
00088 }
00089
00090 /*
00091  #] Uopen :
00092  #[ Uclose :
00093  */
00094
00095 int Uclose(FILES *f)
00096 {
00097     int retval;
00098     if ( f ) {
00099         retval = close(f->descriptor);
00100         M_free(f, "Uclose");
00101         return(retval);
00102     }
00103     return (EOF);
00104 }
00105
00106 /*
00107  #] Uclose :
00108  #[ Uread :
00109  */
00110
00111
00112 size_t Uread(char *ptr, size_t size, size_t nobj, FILES *f)
00113 {
00114     /*:[13jul2005 mt]*/
00115     #ifdef SAFESIGNAL
00116
00117     /*:[15oct2004 mt]*/
00118     /*Operation read() can be interrupted by a signal. Note, this is rather unlikely,
00119     so we do not save size*nobj for future attempts*/
00120     size_t ret;
00121     /*If the syscall is interrupted by a signal before it
00122     succeeded in getting any progress, it must be repeated:*/
00123     while( ( (ret=read(f->descriptor, ptr, size*nobj))<1)&&(errno == EINTR) );
00124     return(ret);
00125     #else
00126     #ifdef DEEPDEBUG
00127     {
00128         POSITION pos;
00129         SETBASEPOSITION(pos, lseek(f->descriptor, 0L, SEEK_CUR));
00130         MesPrint("handle %d: reading %ld bytes from position %p\n", f->descriptor, size*nobj, pos);
00131     }
00132     #endif
00133     #endif

```



```

00133
00134     return(read(f->descriptor,ptr,size*nobj));
00135
00136 #endif
00137 /*:[15oct2004 mt]*/
00138 /*:[13jul2005 mt]*/
00139 }
00140
00141 /*
00142     #] Uread :
00143     #[ Uwrite :
00144 */
00145
00146 size_t Uwrite(char *ptr, size_t size, size_t nobj, FILES *f)
00147 {
00148     /*:[13jul2005 mt]*/
00149     #ifdef SAFESIGNAL
00150     /*:[15oct2004 mt]*/
00151     /*Operation write() can be interrupted by a signal. */
00152     size_t ret;
00153     size_t thesize=size*nobj;
00154     /*If the syscall is interrupted by a signal before it
00155         succeeded in getting any progress, it must be repeated:*/
00156     while( ( ret=write(f->descriptor,ptr,thesize))<1 )&&(errno == EINTR) );
00157
00158     return(ret);
00159 #else
00160     #ifdef DEEPDEBUG
00161     {
00162         POSITION pos;
00163         SETBASEPOSITION(pos,lseek(f->descriptor,0L,SEEK_CUR));
00164         MesPrint("handle %d: writing %ld bytes to position %p\n",f->descriptor,size*nobj,pos);
00165     }
00166 #endif
00167     return(write(f->descriptor,ptr,size*nobj));
00168
00169     /*:[15oct2004 mt]*/
00170 #endif
00171 /*:[13jul2005 mt]*/
00172 }
00173
00174 /*
00175     #] Uwrite :
00176     #[ Useek :
00177 */
00178
00179 int Useek(FILES *f, off_t offset, int origin)
00180 {
00181     if ( f && ( lseek(f->descriptor,offset,origin) >= 0 ) ) return(0);
00182     return(-1);
00183 }
00184
00185 /*
00186     #] Useek :
00187     #[ Utell :
00188 */
00189
00190 off_t Utell(FILES *f)
00191 {
00192     if ( f ) return((off_t)lseek(f->descriptor,0L,SEEK_CUR));
00193     else return(-1);
00194 }
00195
00196 /*
00197     #] Utell :
00198     #[ Uflush :
00199 */
00200
00201 void Uflush(FILES *f) { DUMMYUSE(f); }
00202
00203 /*
00204     #] Uflush :
00205     #[ Ugetpos :
00206 */
00207
00208 int Ugetpos(FILES *f, fpos_t *ptr)
00209 {
00210     DUMMYUSE(f); DUMMYUSE(ptr);
00211     return(-1);
00212 }
00213
00214 /*
00215     #] Ugetpos :
00216     #[ Usetpos :
00217 */
00218
00219 int Usetpos(FILES *f,fpos_t *ptr)

```

```

00220 {
00221     DUMMYUSE(f); DUMMYUSE(ptr);
00222     return(-1);
00223 }
00224
00225 /*
00226     #] Usetpos :
00227     #[ Usetbuf :
00228 */
00229
00230 void Usetbuf(FILE *f, char *ptr) { DUMMYUSE(f); DUMMYUSE(ptr); }
00231
00232 /*
00233     #] Usetbuf :
00234 */
00235 #endif

```

4.159 variable.h File Reference

This graph shows which files directly or indirectly include this file:



Macros

- #define [chartype](#) FG.cTable
- #define [Procedures](#) ((PROCEDURE *) (AP.ProcList.lijst))
- #define [NumProcedures](#) AP.ProcList.num
- #define [MaxProcedures](#) AP.ProcList.maxnum
- #define [DoLoops](#) ((DOLOOP *) (AP.LoopList.lijst))
- #define [NumDoLoops](#) AP.LoopList.num
- #define [MaxDoLoops](#) AP.LoopList.maxnum
- #define [PreVar](#) ((PREVAR *) (AP.PreVarList.lijst))
- #define [NumPre](#) AP.PreVarList.num
- #define [MaxNumPre](#) AP.PreVarList.maxnum
- #define [SetElements](#) ((WORD *) (AC.SetElementList.lijst))
- #define [Sets](#) ((SETS) (AC.SetList.lijst))
- #define [functions](#) ((FUNCTIONS) (AC.FunctionList.lijst))
- #define [indices](#) ((INDICES) (AC.IndexList.lijst))
- #define [symbols](#) ((SYMBOLS) (AC.SymbolList.lijst))
- #define [vectors](#) ((VECTORS) (AC.VectorList.lijst))
- #define [tablebases](#) ((DBASE *) (AC.TableBaseList.lijst))
- #define [NumFunctions](#) AC.FunctionList.num
- #define [NumIndices](#) AC.IndexList.num
- #define [NumSymbols](#) AC.SymbolList.num
- #define [NumVectors](#) AC.VectorList.num
- #define [NumSets](#) AC.SetList.num
- #define [NumSetElements](#) AC.SetElementList.num
- #define [NumTableBases](#) AC.TableBaseList.num
- #define [GlobalFunctions](#) AC.FunctionList.numglobal
- #define [GlobalIndices](#) AC.IndexList.numglobal
- #define [GlobalSymbols](#) AC.SymbolList.numglobal
- #define [GlobalVectors](#) AC.VectorList.numglobal
- #define [GlobalSets](#) AC.SetList.numglobal
- #define [GlobalSetElements](#) AC.SetElementList.numglobal

- `#define cbuf ((CBUF *)(AC.cbufList.lijst))`
- `#define channels ((CHANNEL *)(AC.ChannelList.lijst))`
- `#define NumOutputChannels AC.ChannelList.num`
- `#define Dollars ((DOLLARS)(AP.DollarList.lijst))`
- `#define NumDollars AP.DollarList.num`
- `#define Dubious ((DUBIOUSV)(AC.DubiousList.lijst))`
- `#define NumDubious AC.DubiousList.num`
- `#define Expressions ((EXPRESSIONS)(AC.ExpressionList.lijst))`
- `#define NumExpressions AC.ExpressionList.num`
- `#define autofunctions ((FUNCTIONS)(AC.AutoFunctionList.lijst))`
- `#define autoindices ((INDICES)(AC.AutoIndexList.lijst))`
- `#define autosymbols ((SYMBOLS)(AC.AutoSymbolList.lijst))`
- `#define autovectors ((VECTORS)(AC.AutoVectorList.lijst))`
- `#define xsymbol (cbuf[AM.sbufnum].rhs)`
- `#define numxsymbol (cbuf[AM.sbufnum].numrhs)`
- `#define PotModdollars ((WORD *)(AC.PotModDolList.lijst))`
- `#define NumPotModdollars AC.PotModDolList.num`
- `#define ModOptdollars ((MODEOPTDOLLAR *)(AC.ModOptDolList.lijst))`
- `#define NumModOptdollars AC.ModOptDolList.num`
- `#define BUG A.bug;`
- `#define AC A.Cc`
- `#define AM A.M`
- `#define AN A.N`
- `#define AO A.O`
- `#define AP A.P`
- `#define AR A.R`
- `#define AS A.S`
- `#define AT A.T`
- `#define AX A.X`

Variables

- `WRITEBUFTOEXTCHANNEL` **writeBufToExtChannel**
- `GETCFROMEXTCHANNEL` **getcFromExtChannel**
- `SETTERMINATORFOREXTCHANNEL` **setTerminatorForExternalChannel**
- `SETKILLMODEFOREXTCHANNEL` **setKillModeForExternalChannel**
- `WRITEFILE` **WriteFile**
- `ALLGLOBALS` **A**
- `FIXEDGLOBALS` **FG**
- `FIXEDSET` **fixedsets []**
- `char *` **setupfilename**

4.159.1 Detailed Description

Contains a number of defines to make the coding easier. Especially the defines for the use of the lists are very nice. And of course the AC for A.Cc and AT for either A.T or B->T are indispensable to keep FORM and TFORM in one set of sources.

Definition in file [variable.h](#).

4.159.2 Macro Definition Documentation

4.159.2.1 chartype

```
#define chartype FG.cTable
```

Definition at line 77 of file [variable.h](#).

4.159.2.2 Procedures

```
#define Procedures ((PROCEDURE *) (AP.ProcList.lijt))
```

Definition at line 79 of file [variable.h](#).

4.159.2.3 NumProcedures

```
#define NumProcedures AP.ProcList.num
```

Definition at line 80 of file [variable.h](#).

4.159.2.4 MaxProcedures

```
#define MaxProcedures AP.ProcList.maxnum
```

Definition at line 81 of file [variable.h](#).

4.159.2.5 DoLoops

```
#define DoLoops ((DOLOOP *) (AP.LoopList.lijt))
```

Definition at line 82 of file [variable.h](#).

4.159.2.6 NumDoLoops

```
#define NumDoLoops AP.LoopList.num
```

Definition at line 83 of file [variable.h](#).

4.159.2.7 MaxDoLoops

```
#define MaxDoLoops AP.LoopList.maxnum
```

Definition at line 84 of file [variable.h](#).

4.159.2.8 PreVar

```
#define PreVar ((PREVAR *) (AP.PreVarList.lijt))
```

Definition at line 85 of file [variable.h](#).

4.159.2.9 NumPre

```
#define NumPre AP.PreVarList.num
```

Definition at line 86 of file [variable.h](#).

4.159.2.10 MaxNumPre

```
#define MaxNumPre AP.PreVarList.maxnum
```

Definition at line 87 of file [variable.h](#).

4.159.2.11 SetElements

```
#define SetElements ((WORD *) (AC.SetElementList.lijt))
```

Definition at line 88 of file [variable.h](#).

4.159.2.12 Sets

```
#define Sets ((SETS) (AC.SetList.lijt))
```

Definition at line 89 of file [variable.h](#).

4.159.2.13 functions

```
#define functions ((FUNCTIONS) (AC.FunctionList.lijt))
```

Definition at line 90 of file [variable.h](#).

4.159.2.14 indices

```
#define indices ((INDICES) (AC.IndexList.lijt))
```

Definition at line 91 of file [variable.h](#).

4.159.2.15 symbols

```
#define symbols ((SYMBOLS) (AC.SymbolList.lijt))
```

Definition at line 92 of file [variable.h](#).

4.159.2.16 vectors

```
#define vectors ((VECTORS) (AC.VectorList.lijt))
```

Definition at line 93 of file [variable.h](#).

4.159.2.17 tablebases

```
#define tablebases ((DBASE *) (AC.TableBaseList.lijt))
```

Definition at line 94 of file [variable.h](#).

4.159.2.18 NumFunctions

```
#define NumFunctions AC.FunctionList.num
```

Definition at line 95 of file [variable.h](#).

4.159.2.19 NumIndices

```
#define NumIndices AC.IndexList.num
```

Definition at line 96 of file [variable.h](#).

4.159.2.20 NumSymbols

```
#define NumSymbols AC.SymbolList.num
```

Definition at line 97 of file [variable.h](#).

4.159.2.21 NumVectors

```
#define NumVectors AC.VectorList.num
```

Definition at line 98 of file [variable.h](#).

4.159.2.22 NumSets

```
#define NumSets AC.SetList.num
```

Definition at line 99 of file [variable.h](#).

4.159.2.23 NumSetElements

```
#define NumSetElements AC.SetElementList.num
```

Definition at line 100 of file [variable.h](#).

4.159.2.24 NumTableBases

```
#define NumTableBases AC.TableBaseList.num
```

Definition at line 101 of file [variable.h](#).

4.159.2.25 GlobalFunctions

```
#define GlobalFunctions AC.FunctionList.numglobal
```

Definition at line 102 of file [variable.h](#).

4.159.2.26 GlobalIndices

```
#define GlobalIndices AC.IndexList.numglobal
```

Definition at line 103 of file [variable.h](#).

4.159.2.27 GlobalSymbols

```
#define GlobalSymbols AC.SymbolList.numglobal
```

Definition at line 104 of file [variable.h](#).

4.159.2.28 GlobalVectors

```
#define GlobalVectors AC.VectorList.numglobal
```

Definition at line 105 of file [variable.h](#).

4.159.2.29 GlobalSets

```
#define GlobalSets AC.SetList.numglobal
```

Definition at line 106 of file [variable.h](#).

4.159.2.30 GlobalSetElements

```
#define GlobalSetElements AC.SetElementList.numglobal
```

Definition at line 107 of file [variable.h](#).

4.159.2.31 cbuf

```
#define cbuf ((CBUF *) (AC.cbufList.lijst))
```

Definition at line 108 of file [variable.h](#).

4.159.2.32 channels

```
#define channels ((CHANNEL *) (AC.ChannelList.lijt))
```

Definition at line 109 of file [variable.h](#).

4.159.2.33 NumOutputChannels

```
#define NumOutputChannels AC.ChannelList.num
```

Definition at line 110 of file [variable.h](#).

4.159.2.34 Dollars

```
#define Dollars ((DOLLARS) (AP.DollarList.lijt))
```

Definition at line 111 of file [variable.h](#).

4.159.2.35 NumDollars

```
#define NumDollars AP.DollarList.num
```

Definition at line 112 of file [variable.h](#).

4.159.2.36 Dubious

```
#define Dubious ((DUBIOUSV) (AC.DubiousList.lijt))
```

Definition at line 113 of file [variable.h](#).

4.159.2.37 NumDubious

```
#define NumDubious AC.DubiousList.num
```

Definition at line 114 of file [variable.h](#).

4.159.2.38 Expressions

```
#define Expressions ((EXPRESSIONS) (AC.ExpressionList.lijt))
```

Definition at line 115 of file [variable.h](#).

4.159.2.39 NumExpressions

```
#define NumExpressions AC.ExpressionList.num
```

Definition at line 116 of file [variable.h](#).

4.159.2.40 autofunctions

```
#define autofunctions ((FUNCTIONS) (AC.AutoFunctionList.lijt))
```

Definition at line 117 of file [variable.h](#).

4.159.2.41 autoindices

```
#define autoindices ((INDICES) (AC.AutoIndexList.lijt))
```

Definition at line 118 of file [variable.h](#).

4.159.2.42 autosymbols

```
#define autosymbols ((SYMBOLS) (AC.AutoSymbolList.lijt))
```

Definition at line 119 of file [variable.h](#).

4.159.2.43 autovectors

```
#define autovectors ((VECTORS) (AC.AutoVectorList.lijt))
```

Definition at line 120 of file [variable.h](#).

4.159.2.44 xsymbol

```
#define xsymbol (cbuf[AM.sbufnum].rhs)
```

Definition at line 121 of file [variable.h](#).

4.159.2.45 numxsymbol

```
#define numxsymbol (cbuf[AM.sbufnum].numrhs)
```

Definition at line 122 of file [variable.h](#).

4.159.2.46 PotModdollars

```
#define PotModdollars ((WORD *) (AC.PotModDolList.lijt))
```

Definition at line 124 of file [variable.h](#).

4.159.2.47 NumPotModdollars

```
#define NumPotModdollars AC.PotModDolList.num
```

Definition at line 125 of file [variable.h](#).

4.159.2.48 ModOptdollars

```
#define ModOptdollars ((MODOPTDOLLAR *) (AC.ModOptDolList.lijst))
```

Definition at line 126 of file [variable.h](#).

4.159.2.49 NumModOptdollars

```
#define NumModOptdollars AC.ModOptDolList.num
```

Definition at line 127 of file [variable.h](#).

4.159.2.50 BUG

```
#define BUG A.bug;
```

Definition at line 129 of file [variable.h](#).

4.159.2.51 AC

```
#define AC A.Cc
```

Definition at line 145 of file [variable.h](#).

4.159.2.52 AM

```
#define AM A.M
```

Definition at line 146 of file [variable.h](#).

4.159.2.53 AN

```
#define AN A.N
```

Definition at line 147 of file [variable.h](#).

4.159.2.54 AO

```
#define AO A.O
```

Definition at line 148 of file [variable.h](#).

4.159.2.55 AP

```
#define AP A.P
```

Definition at line 149 of file [variable.h](#).

4.159.2.56 AR

```
#define AR A.R
```

Definition at line 150 of file [variable.h](#).

4.159.2.57 AS

```
#define AS A.S
```

Definition at line 151 of file [variable.h](#).

4.159.2.58 AT

```
#define AT A.T
```

Definition at line 152 of file [variable.h](#).

4.159.2.59 AX

```
#define AX A.X
```

Definition at line 153 of file [variable.h](#).

4.159.3 Variable Documentation

4.159.3.1 WriteFile

```
WRITEFILE WriteFile [extern]
```

Definition at line 1359 of file [tools.c](#).

4.159.3.2 A

```
ALLGLOBALS A [extern]
```

Definition at line 133 of file [inivar.h](#).

4.159.3.3 FG

```
FIXEDGLOBALS FG [extern]
```

Definition at line 34 of file [inivar.h](#).

4.159.3.4 fixedsets

```
FIXEDSET fixedsets[] [extern]
```

Definition at line 259 of file [inivar.h](#).

4.159.3.5 setupfilename

```
char* setupfilename [extern]
```

Definition at line 277 of file [inivar.h](#).

4.160 variable.h

[Go to the documentation of this file.](#)

```
00001 #ifndef __VARIABLE__
00002
00003 #define __VARIABLE__
00004
00013 /* #[] License : */
00014 /*
00015 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00016 * When using this file you are requested to refer to the publication
00017 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00018 * This is considered a matter of courtesy as the development was paid
00019 * for by FOM the Dutch physics granting agency and we would like to
00020 * be able to track its scientific use to convince FOM of its value
00021 * for the community.
00022 *
00023 * This file is part of FORM.
00024 *
00025 * FORM is free software: you can redistribute it and/or modify it under the
00026 * terms of the GNU General Public License as published by the Free Software
00027 * Foundation, either version 3 of the License, or (at your option) any later
00028 * version.
00029 *
00030 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00031 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00032 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00033 * details.
00034 *
00035 * You should have received a copy of the GNU General Public License along
00036 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00037 */
00038 /* #[] License : */
00039
00040 /*See the file extcmd.c*/
00041
00042 #ifdef REMOVEDBY_MT
00043 extern int (*writeBufToExtChannel)(char *buf, size_t n);
00044 extern int (*getcFromExtChannel)();
00045 extern int (*setTerminatorForExternalChannel)(char *newterminator);
00046 #endif
00047 extern WRITEBUFTOEXTCHANNEL writeBufToExtChannel;
00048 extern GETCFROMEXTCHANNEL getcFromExtChannel;
00049 extern SETTERMINATORFOREXTCHANNEL setTerminatorForExternalChannel;
00050 extern SETKILLMODEFOREXTCHANNEL setKillModeForExternalChannel;
00051
00052 /*
00053 extern LONG (*WriteFile)(int handle, UBYTE *buffer, LONG number);
00054 */
00055 extern WRITEFILE WriteFile;
00056 /*:[17nov2005 mt]*/
00057
00058 extern ALLGLOBALS A;
00059 #ifdef WITHPTHREADS
00060 extern ALLPRIVATES **AB;
00061 #endif
00062
00063 extern FIXEDGLOBALS FG;
00064 extern FIXEDSET fixedsets[];
00065
00066 extern char *setupfilename;
```

```


00067
00068 EXTERNLOCK(ErrorMessageLock)
00069 EXTERNLOCK(FileReadLock)
00070 EXTERNLOCK(dummylock)
00071
00072 #ifdef VMS
00073 #include <stdio.h>
00074 extern FILE **FileStructs;
00075 #endif
00076
00077 #define chartype FG.cTable
00078
00079 #define Procedures ((PROCEDURE *) (AP.ProcList.lijst))
00080 #define NumProcedures AP.ProcList.num
00081 #define MaxProcedures AP.ProcList.maxnum
00082 #define DoLoops ((DOLOOP *) (AP.LoopList.lijst))
00083 #define NumDoLoops AP.LoopList.num
00084 #define MaxDoLoops AP.LoopList.maxnum
00085 #define PreVar ((PREVAR *) (AP.PreVarList.lijst))
00086 #define NumPre AP.PreVarList.num
00087 #define MaxNumPre AP.PreVarList.maxnum
00088 #define SetElements ((WORD *) (AC.SetElementList.lijst))
00089 #define Sets ((SETS) (AC.SetList.lijst))
00090 #define functions ((FUNCTIONS) (AC.FunctionList.lijst))
00091 #define indices ((INDICES) (AC.IndexList.lijst))
00092 #define symbols ((SYMBOLS) (AC.SymbolList.lijst))
00093 #define vectors ((VECTORS) (AC.VectorList.lijst))
00094 #define tablebases ((DBASE *) (AC.TableBaseList.lijst))
00095 #define NumFunctions AC.FunctionList.num
00096 #define NumIndices AC.IndexList.num
00097 #define NumSymbols AC.SymbolList.num
00098 #define NumVectors AC.VectorList.num
00099 #define NumSets AC.SetList.num
00100 #define NumSetElements AC.SetElementList.num
00101 #define NumTableBases AC.TableBaseList.num
00102 #define GlobalFunctions AC.FunctionList.numglobal
00103 #define GlobalIndices AC.IndexList.numglobal
00104 #define GlobalSymbols AC.SymbolList.numglobal
00105 #define GlobalVectors AC.VectorList.numglobal
00106 #define GlobalSets AC.SetList.numglobal
00107 #define GlobalSetElements AC.SetElementList.numglobal
00108 #define cbuf ((CBUF *) (AC.cbufList.lijst))
00109 #define channels ((CHANNEL *) (AC.ChannelList.lijst))
00110 #define NumOutputChannels AC.ChannelList.num
00111 #define Dollars ((DOLLARS) (AP.DollarList.lijst))
00112 #define NumDollars AP.DollarList.num
00113 #define Dubious ((DUBIOUSV) (AC.DubiousList.lijst))
00114 #define NumDubious AC.DubiousList.num
00115 #define Expressions ((EXPRESSIONS) (AC.ExpressionList.lijst))
00116 #define NumExpressions AC.ExpressionList.num
00117 #define autofunctions ((FUNCTIONS) (AC.AutoFunctionList.lijst))
00118 #define autoindices ((INDICES) (AC.AutoIndexList.lijst))
00119 #define autosymbols ((SYMBOLS) (AC.AutoSymbolList.lijst))
00120 #define autovectors ((VECTORS) (AC.AutoVectorList.lijst))
00121 #define xsymbol (cbuf[AM.sbufnum].rhs)
00122 #define numxsymbol (cbuf[AM.sbufnum].numrhs)
00123
00124 #define PotModdollars ((WORD *) (AC.PotModDolList.lijst))
00125 #define NumPotModdollars AC.PotModDolList.num
00126 #define ModOptdollars ((MODOPTDOLLAR *) (AC.ModOptDolList.lijst))
00127 #define NumModOptdollars AC.ModOptDolList.num
00128
00129 #define BUG A.bug;
00130
00131 #ifdef WITHPTHREADS
00132 #define AC A.Cc
00133 #define AM A.M
00134 #define AO A.O
00135 #define AP A.P
00136 #define AS A.S
00137 #define AX A.X
00138 #define AN B->N
00139 #define AR B->R
00140 #define AT B->T
00141 #define AN0 B0->N
00142 #define AR0 B0->R
00143 #define AT0 B0->T
00144 #else
00145 #define AC A.Cc
00146 #define AM A.M
00147 #define AN A.N
00148 #define AO A.O
00149 #define AP A.P
00150 #define AR A.R
00151 #define AS A.S
00152 #define AT A.T
00153 #define AX A.X

```


```
00154 #endif
00155
00156 #endif
```

4.161 vector.h File Reference

```
#include <stddef.h>
#include <string.h>
#include "declare.h"
Include dependency graph for vector.h:
```

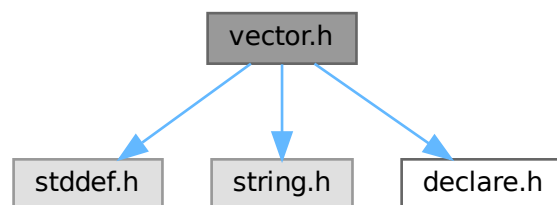

This graph shows which files directly or indirectly include this file:



Macros

- #define `VectorStruct(T)`
- #define `Vector(T, X) VectorStruct(T) X = { NULL, 0, 0 }`
- #define `DeclareVector(T, X) VectorStruct(T) X`
- #define `VectorInit(X)`
- #define `VectorFree(X)`
- #define `VectorPtr(X) ((X).ptr)`
- #define `VectorFront(X) ((X).ptr[0])`
- #define `VectorBack(X) ((X).ptr[(X).size - 1])`
- #define `VectorSize(X) ((X).size)`

- `#define VectorCapacity(X) ((X).capacity)`
- `#define VectorEmpty(X) ((X).size == 0)`
- `#define VectorClear(X) do { (X).size = 0; } while (0)`
- `#define VectorReserve(X, newcapacity)`
- `#define VectorPushBack(X, x)`
- `#define VectorPushBacks(X, src, n)`
- `#define VectorPopBack(X) do { (X).size --; } while (0)`
- `#define VectorInsert(X, index, x)`
- `#define VectorInserts(X, index, src, n)`
- `#define VectorErase(X, index)`
- `#define VectorErases(X, index, n)`

4.161.1 Detailed Description

An implementation of dynamic array.

Example:

```
size_t i;
Vector(int, vec);
VectorPushBack(vec, 1);
VectorPushBack(vec, 2);
VectorPushBack(vec, 3);
for ( i = 0; i < VectorSize(vec); i++ )
    printf("%d\n", VectorPtr(vec)[i]);
VectorFree(vec);
```

Definition in file [vector.h](#).

4.161.2 Macro Definition Documentation

4.161.2.1 VectorStruct

```
#define VectorStruct(
    T )
```

Value:

```
struct { \
    T *ptr; \
    size_t size; \
    size_t capacity; \
}
```

A struct for vector objects.

Parameters

<i>T</i>	the type of elements.
----------	-----------------------

Definition at line 65 of file [vector.h](#).

4.161.2.2 Vector

```
#define Vector(
    T,
    X ) VectorStruct(T) X = { NULL, 0, 0 }
```

Defines and initialises a vector *X* of the type *T*. The user must call [VectorFree\(X\)](#) after the use of *X*.

Parameters

<i>T</i>	the type of elements.
<i>X</i>	the name of vector object

Definition at line 84 of file [vector.h](#).

4.161.2.3 DeclareVector

```
#define DeclareVector(  
    T,  
    X )  VectorStruct (T) X
```

Declares a vector *X* of the type *T*. The user must call [VectorInit\(X\)](#) before the use of *X*.

Parameters

<i>T</i>	the type of elements.
<i>X</i>	the name of vector object

Definition at line 99 of file [vector.h](#).

4.161.2.4 VectorInit

```
#define VectorInit(  
    X )
```

Value:

```
do { \  
    (X).ptr = NULL; \  
    (X).size = 0; \  
    (X).capacity = 0; \  
} while (0)
```

Initialises a vector *X* of the type *T*. The user must call [VectorFree\(X\)](#) after the use of *X*.

Parameters

<i>X</i>	the vector object.
----------	--------------------

Definition at line 113 of file [vector.h](#).

4.161.2.5 VectorFree

```
#define VectorFree(  
    X )
```

Value:


```
do { \
    M_free((X).ptr, "VectorFree:" #X); \
    (X).ptr = NULL; \
    (X).size = 0; \
    (X).capacity = 0; \
} while (0)
```

Frees the buffer allocated by the vector X.

Parameters

X	the vector object.
---	--------------------

Definition at line 130 of file [vector.h](#).

4.161.2.6 VectorPtr

```
#define VectorPtr(  
    X ) ((X).ptr)
```

Returns the pointer to the buffer for the vector X. NULL when [VectorCapacity\(X\)](#) == 0.

Parameters

X	the vector object.
---	--------------------

Returns

the pointer to the allocated buffer for the vector.

Definition at line 150 of file [vector.h](#).

4.161.2.7 VectorFront

```
#define VectorFront(  
    X ) ((X).ptr[0])
```

Returns the first element of the vector X. Undefined when [VectorSize\(X\)](#) == 0.

Parameters

X	the vector object.
---	--------------------

Returns

the first element of the vector.

Definition at line 165 of file [vector.h](#).

4.161.2.8 VectorBack

```
#define VectorBack(  
    X )    ((X).ptr[(X).size - 1])
```

Returns the last element of the vector X. Undefined when [VectorSize\(X\)](#) == 0.

Parameters

X	the vector object.
---	--------------------

Returns

the last element of the vector.

Definition at line 180 of file [vector.h](#).

4.161.2.9 VectorSize

```
#define VectorSize(  
    X )    ((X).size)
```

Returns the size of the vector X.

Parameters

X	the vector object.
---	--------------------

Returns

the size of the vector.

Definition at line 194 of file [vector.h](#).

4.161.2.10 VectorCapacity

```
#define VectorCapacity(  
    X )    ((X).capacity)
```

Returns the capacity (the number of the already allocated elements) of the vector X.

Parameters

X	the vector object.
---	--------------------

Returns

the capacity of the vector.

Definition at line 208 of file [vector.h](#).

4.161.2.11 VectorEmpty

```
#define VectorEmpty(  
    X )    ((X).size == 0)
```

Returns true the size of the vector X is zero.

Parameters

<i>X</i>	the vector object.
----------	--------------------

Returns

true if the vector has no elements, false otherwise.

Definition at line 222 of file [vector.h](#).

4.161.2.12 VectorClear

```
#define VectorClear(  
    X )    do { (X).size = 0; } while (0)
```

Sets the size of the vector X to zero.

Parameters

<i>X</i>	the vector object.
----------	--------------------

Definition at line 235 of file [vector.h](#).

4.161.2.13 VectorReserve

```
#define VectorReserve(  
    X,  
    newcapacity )
```

Value:

```
do { \
    size_t v_tmp_newcapacity_ = (newcapacity); \
    if ( (X).capacity < v_tmp_newcapacity_ ) { \
        void *v_tmp_newptr_; \
        v_tmp_newcapacity_ = (v_tmp_newcapacity_ * 3) / 2; \
        if ( v_tmp_newcapacity_ < 4 ) v_tmp_newcapacity_ = 4; \
        v_tmp_newptr_ = Malloc1(sizeof((X).ptr[0]) * v_tmp_newcapacity_, "VectorReserve:" #X); \
        if ( (X).ptr != NULL ) { \
            memcpy(v_tmp_newptr_, (X).ptr, (X).size * sizeof((X).ptr[0])); \
            M_free((X).ptr, "VectorReserve:" #X); \
        } \
        (X).ptr = v_tmp_newptr_; \
        (X).capacity = v_tmp_newcapacity_; \
    } \
} while (0)
```

Requires that the capacity of the vector X is equal to or larger than newcapacity.

Parameters

<i>X</i>	the vector object.
<i>newcapacity</i>	the capacity to be reserved.

Definition at line 249 of file [vector.h](#).

4.161.2.14 VectorPushBack

```
#define VectorPushBack(  
    X,  
    x )
```

Value:

```
do { \br/>    VectorReserve((X), (X).size + 1); \br/>    (X).ptr[(X).size++] = (x); \br/>} while (0)
```

Adds an element *x* at the end of the vector *X*.

Parameters

<i>X</i>	the vector object.
<i>x</i>	the element to be added.

Definition at line 277 of file [vector.h](#).

4.161.2.15 VectorPushBacks

```
#define VectorPushBacks(  
    X,  
    src,  
    n )
```

Value:

```
do { \br/>    size_t v_tmp_n_ = (n); \br/>    VectorReserve((X), (X).size + v_tmp_n_); \br/>    memcpy((X).ptr + (X).size, (src), v_tmp_n_ * sizeof((X).ptr[0])); \br/>    (X).size += v_tmp_n_; \br/>} while (0)
```

Adds an *n* elements of *src* at the end of the vector *X*.

Parameters

<i>X</i>	the vector object.
<i>src</i>	the starting address of the buffer storing elements to be added.
<i>n</i>	the number of elements to be added.

Definition at line 295 of file [vector.h](#).

4.161.2.16 VectorPopBack

```
#define VectorPopBack(  
    X ) do { (X).size --; } while (0)
```

Removes the last element of the vector X. [VectorSize\(X\)](#) must be > 0 .

Parameters

<i>X</i>	the vector object.
----------	--------------------

Definition at line 314 of file [vector.h](#).

4.161.2.17 VectorInsert

```
#define VectorInsert(  
    X,  
    index,  
    x )
```

Value:

```
do { \
    size_t v_tmp_index_ = (index); \
    VectorReserve((X), (X).size + 1); \
    memmove((X).ptr + v_tmp_index_ + 1, (X).ptr + v_tmp_index_, ((X).size - v_tmp_index_) * \
        sizeof((X).ptr[0])); \
    (X).ptr[v_tmp_index_] = (x); \
    (X).size++; \
} while (0)
```

Inserts an element x at the specified index of the vector X. The index must be $0 \leq \text{index} < \text{VectorSize}(X)$.

Parameters

<i>X</i>	the vector object.
<i>index</i>	the position at which the element will be inserted.
<i>x</i>	the element to be inserted.

Definition at line 330 of file [vector.h](#).

4.161.2.18 VectorInserts

```
#define VectorInserts(  
    X,  
    index,  
    src,  
    n )
```

Value:

```
do { \
    size_t v_tmp_index_ = (index), v_tmp_n_ = (n); \
    VectorReserve((X), (X).size + v_tmp_n_); \
    memmove((X).ptr + v_tmp_index_ + v_tmp_n_, (X).ptr + v_tmp_index_, ((X).size - v_tmp_index_) * \
        sizeof((X).ptr[0])); \
    memcpy((X).ptr + v_tmp_index_, (src), v_tmp_n_ * sizeof((X).ptr[0])); \
    (X).size += v_tmp_n_; \
} while (0)
```

Inserts an n elements of src at the specified index of the vector X. The index must be $0 \leq \text{index} < \text{VectorSize}(X)$.

Parameters

<i>X</i>	the vector object.
<i>index</i>	the position at which the elements will be inserted.
<i>src</i>	the starting address of the buffer storing elements to be inserted.
<i>n</i>	the number of elements to be inserted.

Definition at line 353 of file [vector.h](#).

4.161.2.19 VectorErase

```
#define VectorErase(
    X,
    index )
```

Value:

```
do { \
    size_t v_tmp_index_ = (index); \
    memmove((X).ptr + v_tmp_index_, (X).ptr + v_tmp_index_ + 1, ((X).size - v_tmp_index_ - 1) * \
    sizeof((X).ptr[0])); \
    (X).size--; \
} while (0)
```

Removes an element at the specified index of the vector *X*. The index must be $0 \leq \text{index} < \text{VectorSize}(X)$.

Parameters

<i>X</i>	the vector object.
<i>index</i>	the position of the element to be removed.

Definition at line 374 of file [vector.h](#).

4.161.2.20 VectorErases

```
#define VectorErases(
    X,
    index,
    n )
```

Value:

```
do { \
    size_t v_tmp_index_ = (index), v_tmp_n_ = (n); \
    memmove((X).ptr + v_tmp_index_, (X).ptr + v_tmp_index_ + v_tmp_n_, ((X).size - v_tmp_index_ - 1) * \
    sizeof((X).ptr[0])); \
    (X).size -= v_tmp_n_; \
} while (0)
```

Removes an *n* elements at the specified index of the vector *X*. The index must be $0 \leq \text{index} < \text{VectorSize}(X) - n + 1$.

Parameters

<i>X</i>	the vector object.
<i>index</i>	the starting position of the elements to be removed.
<i>n</i>	the number of elements to be removed.

Definition at line 394 of file [vector.h](#).

4.162 vector.h

[Go to the documentation of this file.](#)

```

00001 #ifndef VECTOR_H_
00002 #define VECTOR_H_
00003
00020 /* #[] License : */
00021 /*
00022  * Copyright (C) 1984-2026 J.A.M. Vermaseren
00023  * When using this file you are requested to refer to the publication
00024  * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00025  * This is considered a matter of courtesy as the development was paid
00026  * for by FOM the Dutch physics granting agency and we would like to
00027  * be able to track its scientific use to convince FOM of its value
00028  * for the community.
00029  *
00030  * This file is part of FORM.
00031  *
00032  * FORM is free software: you can redistribute it and/or modify it under the
00033  * terms of the GNU General Public License as published by the Free Software
00034  * Foundation, either version 3 of the License, or (at your option) any later
00035  * version.
00036  *
00037  * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00038  * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00039  * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00040  * details.
00041  *
00042  * You should have received a copy of the GNU General Public License along
00043  * with FORM. If not, see <http://www.gnu.org/licenses/>.
00044  */
00045 /* #[] License : */
00046 /*
00047  * #[] Includes :
00048  */
00049
00050 #include <stddef.h>
00051 #include <string.h>
00052 #include "declare.h"
00053
00054 /*
00055  * #[] Includes :
00056  * #[] Vector :
00057  * #[] VectorStruct :
00058  */
00059
00065 #define VectorStruct(T) \
00066     struct { \
00067         T *ptr; \
00068         size_t size; \
00069         size_t capacity; \
00070     }
00071
00072 /*
00073  * #[] VectorStruct :
00074  * #[] Vector :
00075  */
00076
00084 #define Vector(T, X) \
00085     VectorStruct(T) X = { NULL, 0, 0 }
00086
00087 /*
00088  * #[] Vector :
00089  * #[] DeclareVector :
00090  */
00091
00099 #define DeclareVector(T, X) \
00100     VectorStruct(T) X
00101
00102 /*
00103  * #[] DeclareVector :
00104  * #[] VectorInit :
00105  */
00106
00113 #define VectorInit(X) \
00114     do { \
00115         (X).ptr = NULL; \
00116         (X).size = 0; \
00117         (X).capacity = 0; \

```

```

00118     } while (0)
00119
00120  /*
00121      #] VectorInit :
00122      #[ VectorFree :
00123  */
00124
00130 #define VectorFree(X) \
00131     do { \
00132         M_free((X).ptr, "VectorFree:" #X); \
00133         (X).ptr = NULL; \
00134         (X).size = 0; \
00135         (X).capacity = 0; \
00136     } while (0)
00137
00138  /*
00139      #] VectorFree :
00140      #[ VectorPtr :
00141  */
00142
00150 #define VectorPtr(X) \
00151     ((X).ptr)
00152
00153  /*
00154      #] VectorPtr :
00155      #[ VectorFront :
00156  */
00157
00165 #define VectorFront(X) \
00166     ((X).ptr[0])
00167
00168  /*
00169      #] VectorFront :
00170      #[ VectorBack :
00171  */
00172
00180 #define VectorBack(X) \
00181     ((X).ptr[(X).size - 1])
00182
00183  /*
00184      #] VectorBack :
00185      #[ VectorSize :
00186  */
00187
00194 #define VectorSize(X) \
00195     ((X).size)
00196
00197  /*
00198      #] VectorSize :
00199      #[ VectorCapacity :
00200  */
00201
00208 #define VectorCapacity(X) \
00209     ((X).capacity)
00210
00211  /*
00212      #] VectorCapacity :
00213      #[ VectorEmpty :
00214  */
00215
00222 #define VectorEmpty(X) \
00223     ((X).size == 0)
00224
00225  /*
00226      #] VectorEmpty :
00227      #[ VectorClear :
00228  */
00229
00235 #define VectorClear(X) \
00236     do { (X).size = 0; } while (0)
00237
00238  /*
00239      #] VectorClear :
00240      #[ VectorReserve :
00241  */
00242
00249 #define VectorReserve(X, newcapacity) \
00250     do { \
00251         size_t v_tmp_newcapacity_ = (newcapacity); \
00252         if ( (X).capacity < v_tmp_newcapacity_ ) { \
00253             void *v_tmp_newptr_; \
00254             v_tmp_newcapacity_ = (v_tmp_newcapacity_ * 3) / 2; \
00255             if ( v_tmp_newcapacity_ < 4 ) v_tmp_newcapacity_ = 4; \
00256             v_tmp_newptr_ = Malloc1(sizeof((X).ptr[0]) * v_tmp_newcapacity_, "VectorReserve:" #X); \
00257             if ( (X).ptr != NULL ) { \
00258                 memcpy(v_tmp_newptr_, (X).ptr, (X).size * sizeof((X).ptr[0])); \
00259                 M_free((X).ptr, "VectorReserve:" #X); \

```



```

00260         } \
00261         (X).ptr = v_tmp_newptr_; \
00262         (X).capacity = v_tmp_newcapacity_; \
00263     } \
00264 } while (0)
00265
00266 /*
00267     #] VectorReserve :
00268     #[ VectorPushBack :
00269 */
00270
00277 #define VectorPushBack(X, x) \
00278     do { \
00279         VectorReserve((X), (X).size + 1); \
00280         (X).ptr[(X).size++] = (x); \
00281     } while (0)
00282
00283 /*
00284     #] VectorPushBack :
00285     #[ VectorPushBacks :
00286 */
00287
00295 #define VectorPushBacks(X, src, n) \
00296     do { \
00297         size_t v_tmp_n_ = (n); \
00298         VectorReserve((X), (X).size + v_tmp_n_); \
00299         memcpy((X).ptr + (X).size, (src), v_tmp_n_ * sizeof((X).ptr[0])); \
00300         (X).size += v_tmp_n_; \
00301     } while (0)
00302
00303 /*
00304     #] VectorPushBacks :
00305     #[ VectorPopBack :
00306 */
00307
00314 #define VectorPopBack(X) \
00315     do { (X).size --; } while (0)
00316
00317 /*
00318     #] VectorPopBack :
00319     #[ VectorInsert :
00320 */
00321
00330 #define VectorInsert(X, index, x) \
00331     do { \
00332         size_t v_tmp_index_ = (index); \
00333         VectorReserve((X), (X).size + 1); \
00334         memmove((X).ptr + v_tmp_index_ + 1, (X).ptr + v_tmp_index_, ((X).size - v_tmp_index_) * \
00335             sizeof((X).ptr[0])); \
00336         (X).ptr[v_tmp_index_] = (x); \
00337         (X).size++; \
00338     } while (0)
00339
00340 /*
00341     #] VectorInsert :
00342     #[ VectorInserts :
00343 */
00344
00353 #define VectorInserts(X, index, src, n) \
00354     do { \
00355         size_t v_tmp_index_ = (index), v_tmp_n_ = (n); \
00356         VectorReserve((X), (X).size + v_tmp_n_); \
00357         memmove((X).ptr + v_tmp_index_ + v_tmp_n_, (X).ptr + v_tmp_index_, ((X).size - v_tmp_index_) * \
00358             sizeof((X).ptr[0])); \
00359         memcpy((X).ptr + v_tmp_index_, (src), v_tmp_n_ * sizeof((X).ptr[0])); \
00360         (X).size += v_tmp_n_; \
00361     } while (0)
00362
00363 /*
00364     #] VectorInserts :
00365     #[ VectorErase :
00366 */
00367
00374 #define VectorErase(X, index) \
00375     do { \
00376         size_t v_tmp_index_ = (index); \
00377         memmove((X).ptr + v_tmp_index_, (X).ptr + v_tmp_index_ + 1, ((X).size - v_tmp_index_ - 1) * \
00378             sizeof((X).ptr[0])); \
00379         (X).size--; \
00380     } while (0)
00381
00382 /*
00383     #] VectorErase :
00384     #[ VectorErases :
00385 */
00386
00394 #define VectorErases(X, index, n) \

```

```


00395     do { \
00396         size_t v_tmp_index_ = (index), v_tmp_n_ = (n); \
00397         memmove((X).ptr + v_tmp_index_, (X).ptr + v_tmp_index_ + v_tmp_n_, ((X).size - v_tmp_index_ -
00398         1) * sizeof((X).ptr[0])); \
00398         (X).size -= v_tmp_n_; \
00399     } while (0)
00400
00401 /*
00402     #] VectorErases :
00403     #] Vector :
00404 */
00405 #endif /* VECTOR_H_ */

```

4.163 wildcard.c File Reference

```
#include "form3.h"
```

Include dependency graph for wildcard.c:

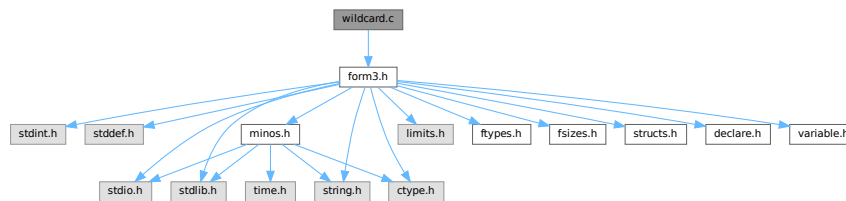

Macros

- `#define` [DEBUG\(x\)](#)

Functions

- `WORD` [WildFill](#) (PHEAD WORD *to, WORD *from, WORD *sub)
- `int` [ResolveSet](#) (PHEAD WORD *from, WORD *to, WORD *subs)
- `void` [ClearWild](#) (PHEAD0)
- `int` [AddWild](#) (PHEAD WORD oldnumber, WORD type, WORD newnumber)
- `int` [CheckWild](#) (PHEAD WORD oldnumber, WORD type, WORD newnumber, WORD *newval)
- `int` [DenToFunction](#) (WORD *term, WORD numfun)

4.163.1 Detailed Description

Contains the functions that deal with the wildcards. During the pattern matching there are two steps: 1: check that a wildcard substitution is correct (if there was already an assignment for this variable, it is the same; it is part of the proper set; it is the proper type of variables, etc.) 2: make the assignment In addition we have to be able to clear assignments. During execution we have to make the actual replacements (WildFill)

Definition in file [wildcard.c](#).

4.163.2 Macro Definition Documentation

4.163.2.1 DEBUG

```
#define DEBUG(  
    x )
```

Definition at line 44 of file [wildcard.c](#).

4.163.3 Function Documentation

4.163.3.1 WildFill()

```
WORD WildFill (  
    PHEAD WORD * to,  
    WORD * from,  
    WORD * sub )
```

Definition at line 65 of file [wildcard.c](#).

4.163.3.2 ResolveSet()

```
int ResolveSet (  
    PHEAD WORD * from,  
    WORD * to,  
    WORD * subs )
```

Definition at line 1361 of file [wildcard.c](#).

4.163.3.3 ClearWild()

```
void ClearWild (  
    PHEAD0 )
```

Definition at line 1518 of file [wildcard.c](#).

4.163.3.4 AddWild()

```
int AddWild (  
    PHEAD WORD oldnumber,  
    WORD type,  
    WORD newnumber )
```

Definition at line 1544 of file [wildcard.c](#).

4.163.3.5 CheckWild()

```
int CheckWild (
    PHEAD WORD oldnumber,
    WORD type,
    WORD newnumber,
    WORD * newval )
```

Definition at line 1791 of file [wildcard.c](#).

4.163.3.6 DenToFunction()

```
int DenToFunction (
    WORD * term,
    WORD numfun )
```

Definition at line 2557 of file [wildcard.c](#).

4.164 wildcard.c

[Go to the documentation of this file.](#)

```
00001
00012 /* #[] License : */
00013 /*
00014 * Copyright (C) 1984-2026 J.A.M. Vermaseren
00015 * When using this file you are requested to refer to the publication
00016 * J.A.M.Vermaseren "New features of FORM" math-ph/0010025
00017 * This is considered a matter of courtesy as the development was paid
00018 * for by FOM the Dutch physics granting agency and we would like to
00019 * be able to track its scientific use to convince FOM of its value
00020 * for the community.
00021 *
00022 * This file is part of FORM.
00023 *
00024 * FORM is free software: you can redistribute it and/or modify it under the
00025 * terms of the GNU General Public License as published by the Free Software
00026 * Foundation, either version 3 of the License, or (at your option) any later
00027 * version.
00028 *
00029 * FORM is distributed in the hope that it will be useful, but WITHOUT ANY
00030 * WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS
00031 * FOR A PARTICULAR PURPOSE. See the GNU General Public License for more
00032 * details.
00033 *
00034 * You should have received a copy of the GNU General Public License along
00035 * with FORM. If not, see <http://www.gnu.org/licenses/>.
00036 */
00037 /* #[] License : */
00038 /*
00039 * #[] Includes : wildcard.c
00040 */
00041
00042 #include "form3.h"
00043
00044 #define DEBUG(x)
00045
00046 /*
00047 #define DEBUG(x) x
00048
00049 #[] Includes :
00050 #[] Wildcards :
00051 #[] WildFill : WORD WildFill(to,from,sub)
00052
00053 Takes the term in from and puts it into to while
00054 making wildcard substitutions.
00055 The return value is the number of words put in to.
00056 The length as the first word of from is not copied.
00057
00058 There are two possible algorithms:
00059 1: For each element in `from': scan sub.
```

```

00060      2: For each wildcard in sub replace elements in term.
00061      The original algorithm used 1:
00062
00063  */
00064
00065 WORD WildFill(PHEAD WORD *to, WORD *from, WORD *sub)
00066 {
00067     GETBIDENTITY
00068     WORD i, j, *s, *t, *m, len, dflag, odirt, adirt;
00069     WORD *r, *u, *v, *w, *z, *zst, *zz, *subs, *accu, na, dirty = 0, *tstop;
00070     WORD *temp = 0, *uu, *oldcpointer, sgn;
00071     WORD subcount, setflag, *setlist = 0, si;
00072     accu = oldcpointer = AR.CompressPointer;
00073     t = sub;
00074     t += sub[1];
00075     s = sub + SUBEXPSIZE;
00076     i = 0;
00077     while ( s < t && *s != FROMBRAC ) {
00078         i++; s += s[1];
00079     }
00080     if ( !i ) { /* No wildcards -> done quickly */
00081         j = i = *from;
00082         NCOPY(to, from, i);
00083         if ( dirty ) AN.WildDirt = dirty;
00084         return(j);
00085     }
00086     sgn = 0;
00087     subs = sub + SUBEXPSIZE;
00088     t = from;
00089     GETSTOP(t, r);
00090     t++;
00091     m = to + 1;
00092     if ( t < r ) do {
00093         uu = u = t + t[1];
00094         setflag = 0;
00095     ReSwitch:
00096         switch ( *t ) {
00097             case SYMBOL:
00098                 /*
00099                  *#[ SYMBOLS :
00100                 */
00101                 z = accu;
00102                 *m++ = *t++;
00103                 *m++ = *t++;
00104                 v = m;
00105                 while ( t < u ) {
00106                     *m = *t;
00107                     for ( si = 0; si < setflag; si += 2 ) {
00108                         if ( t == temp + setlist[si] ) goto sspow;
00109                     }
00110                     s = subs;
00111                     for ( j = 0; j < i; j++ ) {
00112                         if ( *t == s[2] ) {
00113                             if ( *s == SYMTOSYM ) {
00114                                 *m = s[3]; dirty = 1;
00115                                 break;
00116                             }
00117                             else if ( *s == SYMTONUM ) {
00118                                 dirty = 1;
00119                                 zst = z;
00120                                 *z++ = SNUMBER;
00121                                 *z++ = 4;
00122                                 *z++ = s[3];
00123                                 w = z;
00124                                 *z++ = ++t;
00125                                 if ( ABS(*t) >= 2*MAXPOWER ) {
00126                                     DoPow:
00127                                     s = subs;
00128                                     for ( j = 0; j < i; j++ ) {
00129                                         if ( ( *s == SYMTONUM ) &&
00130                                              ( ABS(*t) - 2*MAXPOWER ) == s[2] ) {
00131                                             dirty = 1;
00132                                             *w = s[3];
00133                                             if ( *t < 0 ) *w = -*w;
00134                                             break;
00135                                         }
00136                                         if ( ( *s == SYMTOSYM ) &&
00137                                              ( ABS(*t) - 2*MAXPOWER ) == s[2] ) {
00138                                             dirty = 1;
00139                                             zz = z;
00140                                             while ( --zz >= zst ) {
00141                                                 zz[1+FUNHEAD+ARGHEAD] = *zz;
00142                                             }
00143                                             w += 1+FUNHEAD+ARGHEAD;
00144                                             *zst = EXPONENT;
00145                                             zst[2] = DIRTYFLAG;
00146                                             zst[1+FUNHEAD+ARGHEAD] = WORDDIF(z, zst)+4;
00147                                             zst[1+FUNHEAD] = 1;

```

```

00147      zst[FUNHEAD] = WORDDIF(z,zst)+4+ARGHEAD;
00148      z += FUNHEAD+ARGHEAD+1;
00149      *w = 1; /* exponent -> 1 */
00150      *z++ = 1;
00151      *z++ = 1;
00152      *z++ = 3;
00153      if ( *t > 0 ) {
00154          *z++ = -SYMBOL;
00155          *z++ = s[3];
00156      }
00157      else {
00158          *z++ = ARGHEAD+8;
00159          *z++ = 1;
00160          *z++ = 8;
00161          *z++ = SYMBOL;
00162          *z++ = 4;
00163          *z++ = s[3];
00164          *z++ = 1;
00165          *z++ = 1;
00166          *z++ = 1;
00167          *z++ = -3;
00168      }
00169      zst[1] = WORDDIF(z,zst);
00170      break;
00171  }
00172  if ( *s == SYMTOSUB &&
00173      ( ABS(*t) - 2*MAXPOWER ) == s[2] ) {
00174      MakeExp:
00175          dirty = 1;
00176          zz = z;
00177          while ( --zz >= zst ) {
00178              zz[1+FUNHEAD+ARGHEAD] = *zz;
00179          }
00180          w += 1+FUNHEAD+ARGHEAD;
00181          *zst = EXPONENT;
00182          zst[2] = DIRTYFLAG;
00183          zst[FUNHEAD+ARGHEAD] = WORDDIF(z,zst)+4;
00184          zst[1+FUNHEAD] = 1;
00185          zst[FUNHEAD] = WORDDIF(z,zst)+4+ARGHEAD;
00186          z += FUNHEAD+ARGHEAD+1;
00187          *w = 1; /* exponent -> 1 */
00188          *z++ = 1;
00189          *z++ = 1;
00190          *z++ = 3;
00191          *z++ = 4+SUBEXPSIZE+ARGHEAD;
00192          *z++ = 1;
00193          *z++ = 4+SUBEXPSIZE;
00194          *z++ = SUBEXPRESSION;
00195          *z++ = SUBEXPSIZE;
00196          *z++ = s[3];
00197          *z++ = 1;
00198          *z++ = AT.ebufnum;
00199          FILLSUB(z)
00200          *z++ = 1;
00201          *z++ = 1;
00202          *z++ = *t > 0 ? 3: -3;
00203          zst[1] = WORDDIF(z,zst);
00204          break;
00205      }
00206      s += s[1];
00207  }
00208  if ( !*w ) z = w - 3;
00209  t++;
00210  goto Seven;
00211  }
00212  else if ( *s == SYMTOSUB ) {
00213      dirty = 1;
00214      zst = z;
00215      *z++ = SUBEXPRESSION;
00216      *z++ = SUBEXPSIZE;
00217      *z++ = s[3];
00218      w = z;
00219      *z++ = ++t;
00220      *z++ = AT.ebufnum;
00221      FILLSUB(z)
00222      goto DoPow;
00223  }
00224  }
00225  s += s[1];
00226  }
00227  sspow:
00228  s = subs;
00229  **tm = ++t;
00230  for ( si = 0; si < setflag; si += 2 ) {
00231      if ( t == temp + setlist[si] ) {
00232          t++; m++;
00233          goto Seven;

```

```

00234     }
00235 }
00236 for ( j = 0; j < i; j++ ) {
00237     if ( ( ABS(*t) - 2*MAXPOWER ) == s[2] ) {
00238         if ( *s == SYMTONUM ) {
00239             dirty = 1;
00240             *m = s[3];
00241             if ( *t < 0 ) *m = -*m;
00242             break;
00243         }
00244         else if ( *s == SYMTOSYM ) {
00245             dirty = 1;
00246             *z++ = EXPONENT;
00247             if ( *t < 0 ) *z++ = FUNHEAD+ARGHEAD+10;
00248             else *z++ = 4+FUNHEAD;
00249             *z++ = 0;
00250             FILLFUN3(z)
00251             *z++ = -SYMBOL;
00252             *z++ = m[-1];
00253             if ( *t < 0 ) {
00254                 *z++ = ARGHEAD+8;
00255                 *z++ = 0;
00256                 *z++ = 8;
00257                 *z++ = SYMBOL;
00258                 *z++ = 4;
00259                 *z++ = s[3];
00260                 *z++ = 1;
00261                 *z++ = 1;
00262                 *z++ = 1;
00263                 *z = -3;
00264             }
00265             else {
00266                 *z++ = -SYMBOL;
00267                 *z++ = s[3];
00268             }
00269             m -= 2;
00270             break;
00271         }
00272         else if ( *s == SYMTOSUB ) {
00273             zst = z;
00274             *z++ = SYMBOL;
00275             *z++ = 4;
00276             *z++ = *--m;
00277             w = z;
00278             *z++ = *t;
00279             goto MakeExp;
00280         }
00281     }
00282     s += s[1];
00283 }
00284 t++;
00285 if ( *m ) m++;
00286 else m--;
00287 Seven;;
00288 }
00289 j = WORDDIF(m,v);
00290 if ( !j ) m -= 2;
00291 else v[-1] = j + 2;
00292 s = accu;
00293 while ( s < z ) *m++ = *s++;
00294 break;
00295 /*
00296 #] SYMBOLS :
00297 */
00298 case DOTPRODUCT:
00299 /*
00300 #[ DOTPRODUCTS :
00301 */
00302     *m++ = *t++;
00303     *m++ = *t++;
00304     v = m;
00305     z = accu;
00306     while ( t < u ) {
00307         *m = *t;
00308         subcount = 0;
00309         /* Process the first vector of the DOTPRODUCT */
00310         for ( si = 0; si < setflag; si += 2 ) {
00311             if ( t == temp + setlist[si] ) goto ss2;
00312         }
00313         s = subs;
00314         for ( j = 0; j < i; j++ ) {
00315             if ( *t == s[2] ) {
00316                 if ( *s == VECTOVEC ) {
00317                     *m = s[3]; dirty = 1; break;
00318                 }
00319                 if ( *s == VECTOMIN ) {
00320                     *m = s[3];

```

```

00321             dirty = 1;
00322             if ( ( ABS(t[2]) - 2*MAXPOWER ) < 0 ) {
00323                 /* The power is a number */
00324                 sgn += t[2];
00325             }
00326             else {
00327                 /* The power is a wildcard. Put a -, resolve later. */
00328                 sgn++;
00329             }
00330             break;
00331         }
00332         if ( *s == VECTOSUB ) {
00333             *m = s[3]; dirty = 1; subcount = 1; break;
00334         }
00335     }
00336     s += s[1];
00337 }
00338 ss2:
00339     *++m = *++t;
00340     s = subs;
00341     /* Process the second vector of the DOTPRODUCT */
00342     for ( si = 0; si < setflag; si += 2 ) {
00343         if ( t == temp + setlist[si] ) goto ss3;
00344     }
00345     for ( j = 0; j < i; j++ ) {
00346         if ( *t == s[2] ) {
00347             if ( *s == VECTOVEC ) {
00348                 *m = s[3]; dirty = 1; break;
00349             }
00350             if ( *s == VECTOMIN ) {
00351                 *m = s[3];
00352                 dirty = 1;
00353                 if ( ( ABS(t[1]) - 2*MAXPOWER ) < 0 ) {
00354                     /* The power is a number */
00355                     sgn += t[1];
00356                 }
00357                 else {
00358                     /* The power is a wildcard. Put a -, resolve later. */
00359                     sgn++;
00360                 }
00361                 break;
00362             }
00363             if ( *s == VECTOSUB ) {
00364                 *m = s[3]; dirty = 1; subcount += 2; break;
00365             }
00366         }
00367         s += s[1];
00368     }
00369 ss3:
00370     *++m = *++t;
00371     /* Process the power */
00372     if ( ( ABS(*t) - 2*MAXPOWER ) < 0 ) goto RegPow;
00373     s = subs;
00374     for ( j = 0; j < i; j++ ) {
00375         if ( ( ABS(*t) - 2*MAXPOWER ) == s[2] ) {
00376             if ( *s == SYMTONUM ) {
00377                 *m = s[3];
00378                 /* Since the power is a wildcard, sgn is 0,1,2 depending whether
00379                    there were 0,1,2 VECTOMIN in the DOTPRODUCT. Multiply by the
00380                    power, which is positive currently. */
00381                 sgn *= *m;
00382                 /* Now flip the sign of the power, if the wildcard came with a - */
00383                 if ( *t < 0 ) *m = -*m;
00384                 dirty = 1;
00385                 break;
00386             }
00387             if ( *s <= SYMTOSUB ) {
00388                 Here we put together a power function with the proper
00389                 arguments. Note that a p?.q? resolves to a single power.
00390             }
00391             m -= 2;
00392             *z++ = EXPONENT;
00393             w = z;
00394             if ( subcount == 0 ) {
00395                 *z++ = 17+FUNHEAD+2*ARGHEAD;
00396                 *z++ = DIRTYFLAG;
00397                 FILLFUN3(z)
00398                 *z++ = 9+ARGHEAD;
00399                 *z++ = 0;
00400                 FILLARG(z)
00401                 *z++ = 9;
00402                 *z++ = DOTPRODUCT;
00403                 *z++ = 5;
00404                 *z++ = *m;
00405                 *z++ = m[1];
00406                 *z++ = 1;
00407                 *z++ = 1;

```



```

00408         *z++ = 1;
00409         *z++ = 3;
00410         if ( *s == SYMTOSYM ) {
00411             *z++ = 8+ARGHEAD;
00412             *z++ = 0;
00413             FILLARG(z)
00414             *z++ = 8;
00415             *z++ = SYMBOL;
00416             *z++ = 4;
00417             *z++ = s[3];
00418             *z++ = 1;
00419         }
00420         else {
00421             *z++ = 4+SUBEXPSIZE+ARGHEAD;
00422             *z++ = 1;
00423             FILLARG(z)
00424             *z++ = 4+SUBEXPSIZE;
00425             *z++ = SUBEXPRESSION;
00426             *z++ = SUBEXPSIZE;
00427             *z++ = s[3];
00428             *z++ = 1;
00429             *z++ = AT.ebufnum;
00430             FILLSUB(z)
00431         }
00432         *z++ = 1; *z++ = 1;
00433         *z++ = ( s[2] > 0 ) ? 3: -3;
00434     }
00435     else if ( subcount == 3 ) {
00436         *z++ = 20+2*SUBEXPSIZE+FUNHEAD+2*ARGHEAD;
00437         *z++ = DIRTYFLAG;
00438         FILLFUN3(z)
00439         *z++ = 12+2*SUBEXPSIZE+ARGHEAD;
00440         *z++ = 1;
00441         *z++ = 12+2*SUBEXPSIZE;
00442         *z++ = SUBEXPRESSION;
00443         *z++ = 4+SUBEXPSIZE;
00444         *z++ = *m + 1;
00445         *z++ = 1;
00446         *z++ = AT.ebufnum;
00447         FILLSUB(z)
00448         *z++ = INDTOIND;
00449         *z++ = 4;
00450         *z++ = FUNNYVEC;
00451         *z++ = ++AR.CurDum;
00452
00453         *z++ = SUBEXPRESSION;
00454         *z++ = 4+SUBEXPSIZE;
00455         *z++ = m[1] + 1;
00456         *z++ = 1;
00457         *z++ = AT.ebufnum;
00458         FILLSUB(z)
00459         *z++ = INDTOIND;
00460         *z++ = 4;
00461         *z++ = FUNNYVEC;
00462         *z++ = AR.CurDum;
00463         *z++ = 1; *z++ = 1; *z++ = 3;
00464     }
00465     else {
00466         if ( subcount == 2 ) {
00467             j = *m; *m = m[1]; m[1] = j;
00468         }
00469         *z++ = 16+SUBEXPSIZE+FUNHEAD+2*ARGHEAD;
00470         *z++ = DIRTYFLAG;
00471         FILLFUN3(z)
00472         *z++ = 8+SUBEXPSIZE+ARGHEAD;
00473         *z++ = 1;
00474         *z++ = 8+SUBEXPSIZE;
00475         *z++ = SUBEXPRESSION;
00476         *z++ = 4+SUBEXPSIZE;
00477         *z++ = *m + 1;
00478         *z++ = 1;
00479         *z++ = AT.ebufnum;
00480         FILLSUB(z)
00481         *z++ = INDTOIND;
00482         *z++ = 4;
00483         *z++ = FUNNYVEC;
00484         *z++ = m[1];
00485         *z++ = 1; *z++ = 1; *z++ = 3;
00486     }
00487     if ( *s == SYMTOSYM ) {
00488         if ( s[2] > 0 ) {
00489             *z++ = -SYMBOL;
00490             *z++ = s[3];
00491             t++;
00492             *w = z-w+1;
00493             goto NextDot;
00494         }

```

```

00495             *z++ = 8+ARGHEAD;
00496             *z++ = 0;
00497             *z++ = 8;
00498             *z++ = SYMBOL;
00499             *z++ = 4;
00500             *z++ = s[3];
00501             *z++ = 1;
00502         }
00503         else {
00504             *z++ = 4+SUBEXPSIZE+ARGHEAD;
00505             *z++ = 1;
00506             *z++ = 4+SUBEXPSIZE;
00507             *z++ = SUBEXPRESSION;
00508             *z++ = SUBEXPSIZE;
00509             *z++ = s[3];
00510             *z++ = 1;
00511             *z++ = AT.ebufnum;
00512             FILLSUB(z)
00513         }
00514         *z++ = 1; *z++ = 1;
00515         *z++ = ( s[2] > 0 ) ? 3: -3;
00516         t++;
00517         *w = z-w+1;
00518         goto NextDot;
00519     }
00520 }
00521 s += s[1];
00522 }
00523 RegPow:
00524 if ( *m ) m++;
00525 else { m -= 2; subcount = 0; }
00526 t++;
00527 if ( subcount ) {
00528     m -= 3;
00529     if ( subcount == 3 ) {
00530         if ( m[2] < 0 ) {
00531             j = (-m[2]) * (2*SUBEXPSIZE+8);
00532             *z++ = DENOMINATOR;
00533             *z++ = j + 8 + FUNHEAD + ARGHEAD;
00534             *z++ = DIRTYFLAG;
00535             FILLFUN3(z)
00536             *z++ = j + 8 + ARGHEAD;
00537             *z++ = 1;
00538             *z++ = j + 8;
00539             while ( m[2] < 0 ) {
00540                 (m[2])++;
00541                 *z++ = SUBEXPRESSION;
00542                 *z++ = 4+SUBEXPSIZE;
00543                 *z++ = *m + 1;
00544                 *z++ = 1;
00545                 *z++ = AT.ebufnum;
00546                 FILLSUB(z)
00547                 *z++ = INDTOIND;
00548                 *z++ = 4;
00549                 *z++ = FUNNYVEC;
00550                 *z++ = ++AR.CurDum;
00551                 *z++ = SUBEXPRESSION;
00552                 *z++ = 8+SUBEXPSIZE;
00553                 *z++ = m[1] + 1;
00554                 *z++ = 1;
00555                 *z++ = AT.ebufnum;
00556                 FILLSUB(z)
00557                 *z++ = INDTOIND;
00558                 *z++ = 4;
00559                 *z++ = FUNNYVEC;
00560                 *z++ = AR.CurDum;
00561                 *z++ = SYMTOSYM; /* Needed to avoid */
00562                 *z++ = 4; /* problems with */
00563                 *z++ = 1000; /* conversion to */
00564                 *z++ = 1000; /* square of subexp*/
00565             }
00566             *z++ = 1; *z++ = 1; *z++ = 3;
00567         }
00568     }
00569     else {
00570         while ( m[2] > 0 ) {
00571             (m[2])--;
00572             *z++ = SUBEXPRESSION;
00573             *z++ = 4+SUBEXPSIZE;
00574             *z++ = *m + 1;
00575             *z++ = 1;
00576             *z++ = AT.ebufnum;
00577             FILLSUB(z)
00578             *z++ = INDTOIND;
00579             *z++ = 4;
00580             *z++ = FUNNYVEC;
00581             *z++ = ++AR.CurDum;
00582             *z++ = SUBEXPRESSION;
00583             *z++ = 4+SUBEXPSIZE;

```

```

00582             *z++ = m[1] + 1;
00583             *z++ = 1;
00584             *z++ = AT.ebufnum;
00585             FILLSUB(z)
00586             *z++ = INDTOIND;
00587             *z++ = 4;
00588             *z++ = FUNNYVEC;
00589             *z++ = AR.CurDum;
00590         }
00591     }
00592 }
00593 else {
00594     if ( subcount == 2 ) {
00595         j = *m; *m = m[1]; m[1] = j;
00596     }
00597     if ( m[2] < 0 ) {
00598         *z++ = DENOMINATOR;
00599         *z++ = 8+SUBEXPSIZE+FUNHEAD+ARGHEAD;
00600         *z++ = DIRTYFLAG;
00601         FILLFUN3(z)
00602         *z++ = 8+SUBEXPSIZE+ARGHEAD;
00603         *z++ = 1;
00604         *z++ = 8+SUBEXPSIZE;
00605     }
00606     *z++ = SUBEXPRESSION;
00607     *z++ = 4+SUBEXPSIZE;
00608     *z++ = *m + 1;
00609     *z++ = ABS(m[2]);
00610     *z++ = AT.ebufnum;
00611     FILLSUB(z)
00612     *z++ = INDTOIND;
00613     *z++ = 4;
00614     *z++ = FUNNYVEC;
00615     *z++ = m[1];
00616     if ( m[2] < 0 ) {
00617         *z++ = 1; *z++ = 1; *z++ = 3;
00618     }
00619 }
00620 }
00621 NextDot;;
00622 }
00623 if ( m <= v ) m = v - 2;
00624 else v[-1] = WORDDIF(m,v) + 2;
00625 if ( z > accu ) {
00626     j = WORDDIF(z,accu);
00627     z = accu;
00628     NCOPY(m,z,j);
00629 }
00630 break;
00631 /*
00632 #] DOTPRODUCTS :
00633 */
00634 case SETSET:
00635 /*
00636 #[ SETS :
00637 */
00638     temp = accu + (((AR.ComprTop - accu)>1)&(-2));
00639     if ( ResolveSet(BHEAD t,temp,sub) ) {
00640         Terminate(-1);
00641     }
00642     setlist = t + 2 + t[3];
00643     setflag = t[1] - 2 - t[3]; /* Number of elements * 2 */
00644     t = temp; u = t + t[1];
00645     goto ReSwitch;
00646 /*
00647 #] SETS :
00648 */
00649 case VECTOR:
00650 /*
00651 #[ VECTORS :
00652 */
00653     *m++ = *t++;
00654     *m++ = *t++;
00655     v = m;
00656     z = accu;
00657     while ( t < u ) {
00658         *m = *t;
00659         for ( si = 0; si < setflag; si += 2 ) {
00660             if ( t == temp + setlist[si] ) goto ss4;
00661         }
00662         s = subs;
00663         for ( j = 0; j < i; j++ ) {
00664             if ( *t == s[2] ) {
00665                 if ( *s == INDTOIND || *s == VECTOVEC ) {
00666                     *m = s[3]; dirty = 1; break;
00667                 }
00668                 if ( *s == VECTOMIN ) {

```

```

00669             *m = s[3]; dirty = 1; sgn++; break;
00670         }
00671         else if ( *s == VECTOSUB ) {
00672             *z++ = SUBEXPRESSION;
00673             *z++ = 4+SUBEXPSIZE;
00674             *z++ = s[3]+1;
00675             *z++ = 1;
00676             *z++ = AT.ebufnum;
00677             FILLSUB(z)
00678             *z++ = VECTOVEC;
00679             *z++ = 4;
00680             *z++ = FUNNYVEC;
00681             *z++ = *++t;
00682             m--;
00683             s = subs;
00684             for ( j = 0; j < i; j++ ) {
00685                 if ( z[-1] == s[2] ) {
00686                     if ( *s == INDTOIND || *s == VECTOVEC ) {
00687                         z[-1] = s[3];
00688                         break;
00689                     }
00690                     if ( *s == INDTOSUB || *s == VECTOSUB ) {
00691                         z[-1] = ++AR.CurDum;
00692                         *z++ = SUBEXPRESSION;
00693                         *z++ = 4+SUBEXPSIZE;
00694                         *z++ = s[3]+1;
00695                         *z++ = 1;
00696                         *z++ = AT.ebufnum;
00697                         FILLSUB(z)
00698                         if ( *s == INDTOSUB ) *z++ = INDTOIND;
00699                         else *z++ = VECTOSUB;
00700                         *z++ = 4;
00701                         *z++ = FUNNYVEC;
00702                         *z++ = AR.CurDum;
00703                         break;
00704                     }
00705                 }
00706                 s += s[1];
00707             }
00708             dirty = 1;
00709             break;
00710         }
00711         else if ( *s == INDTOSUB ) {
00712             *z++ = SUBEXPRESSION;
00713             *z++ = 4+SUBEXPSIZE;
00714             *z++ = s[3]+1;
00715             *z++ = 1;
00716             *z++ = AT.ebufnum;
00717             FILLSUB(z)
00718             *z++ = INDTOIND;
00719             *z++ = 4;
00720             *z++ = FUNNYVEC;
00721             m -= 2;
00722             *z++ = m[1];
00723             dirty = 1;
00724             t++;
00725             break;
00726         }
00727     }
00728     s += s[1];
00729 }
00730 ss4:
00731     }
00732     if ( m <= v ) m = v-2;
00733     else v[-1] = WORDDIF(m,v)+2;
00734     if ( z > accu ) {
00735         j = WORDDIF(z,accu); z = accu;
00736         NCOPY(m,z,j);
00737     }
00738     break;
00739 /*
00740 #] VECTORS :
00741 */
00742 case INDEX:
00743 /*
00744 #[ INDEX :
00745 */
00746     *m++ = *t++;
00747     *m++ = *t++;
00748     v = m;
00749     z = accu;
00750     while ( t < u ) {
00751         *m = *t;
00752         for ( si = 0; si < setflag; si += 2 ) {
00753             if ( t == temp + setlist[si] ) goto ss5;
00754         }
00755         s = subs;

```

```

00756         for ( j = 0; j < i; j++ ) {
00757             if ( *t == s[2] ) {
00758                 if ( *s == INDTOIND || *s == VECTOVEC )
00759                     { *m = s[3]; dirty = 1; break; }
00760                 if ( *s == VECTOMIN )
00761                     { *m = s[3]; dirty = 1; sgn++; break; }
00762                 else if ( *s == VECTOSUB || *s == INDTOSUB ) {
00763                     *z++ = SUBEXPRESSION;
00764                     *z++ = SUBEXPSIZE;
00765                     *z++ = s[3];
00766                     *z++ = 1;
00767                     *z++ = AT.ebufnum;
00768                     FILLSUB(z)
00769                     m--;
00770                     dirty = 1;
00771                     break;
00772                 }
00773             }
00774             s += s[1];
00775         }
00776         ss5:      m++; t++;
00777     }
00778     if ( m <= v ) m = v-2;
00779     else v[-1] = WORDDIF(m,v)+2;
00780     if ( z > accu ) {
00781         j = WORDDIF(z,accu); z = accu;
00782         NCOPY(m,z,j);
00783     }
00784     break;
00785 /*
00786 #] INDEX :
00787 */
00788 case DELTA:
00789 case LEVICIVITA:
00790 case GAMMA:
00791 /*
00792 #[ SPECIALS :
00793 */
00794     v = m;
00795     *m++ = *t++;
00796     *m++ = *t++;
00797     #if FUNHEAD > 2
00798         if ( t[-2] != DELTA ) *m++ = *t++;
00799     #endif
00800     Tensors:
00801         COPYFUN3(m,t)
00802         z = accu;
00803         while ( t < u ) {
00804             *m = *t;
00805             for ( si = 0; si < setflag; si += 2 ) {
00806                 if ( t == temp + setlist[si] ) goto ss6;
00807             }
00808             s = subs;
00809             if ( *m == FUNNYWILD ) {
00810                 CBUF *C = cbuf+AT.ebufnum;
00811                 t++;
00812                 for ( j = 0; j < i; j++ ) {
00813                     if ( *s == ARGTOARG && *t == s[2] ) {
00814                         v[2] |= DIRTYFLAG;
00815                         if ( s[3] < 0 ) { /* empty */
00816                             t++; break;
00817                         }
00818                         w = C->rhs[s[3]];
00819                     DEBUG(MesPrint("Thread %w(a): s[3] = %d, w=(%d,%d,%d,%d)",s[3],w[0],w[1],w[2],w[3]));
00820                     j = *w++;
00821                     if ( j > 0 ) {
00822                         NCOPY(m,w,j);
00823                     }
00824                     else {
00825                         while ( *w ) {
00826                             if ( *w == -INDEX || *w == -VECTOR
00827                                 || *w == -MINVECTOR
00828                                 || ( *w == -SNUMBER && w[1] >= 0
00829                                     && w[1] < AM.OffsetIndex ) ) {
00830                                 if ( *w == -MINVECTOR ) sgn++;
00831                                 w++;
00832                                 *m++ = *w++;
00833                             }
00834                             else {
00835                                 MLOCK(ErrorMessageLock);
00836                                 DEBUG(MesPrint("Thread %w(aa): *w = %d",*w));
00837                                 MesPrint("Illegal substitution of argument field in
tensor");
00838                                 MUNLOCK(ErrorMessageLock);
00839                                 SETERROR(-1)
00840                             }
00841                         }

```

```

00842                }
00843                t++;
00844                break;
00845            }
00846            s += s[1];
00847        }
00848    }
00849    else {
00850        for ( j = 0; j < i; j++ ) {
00851            if ( *t == s[2] ) {
00852                if ( *s == INDTOIND || *s == VECTOVEC )
00853                    { *m = s[3]; dirty = 1; break; }
00854                if ( *s == VECTOMIN )
00855                    { *m = s[3]; dirty = 1; sgn++; break; }
00856                else if ( *s == VECTOSUB || *s == INDTOSUB ) {
00857                    *m = ++AR.CurDum;
00858                    *z++ = SUBEXPRESSION;
00859                    *z++ = 4+SUBEXPSIZE;
00860                    *z++ = s[3]+1;
00861                    *z++ = 1;
00862                    *z++ = AT.ebufnum;
00863                    FILLSUB(z)
00864                    *z++ = INDTOIND;
00865                    *z++ = 4;
00866                    *z++ = FUNNYVEC;
00867                    *z++ = AR.CurDum;
00868                    dirty = 1;
00869                    break;
00870                }
00871            }
00872            s += s[1];
00873        }
00874        if ( j < i && *v != DELTA ) v[2] |= DIRTYFLAG;
00875    ss6:    m++; t++;
00876    }
00877    }
00878    v[1] = WORDDIF(m,v);
00879    if ( z > accu ) {
00880        j = WORDDIF(z,accu); z = accu;
00881        NCOPY(m,z,j);
00882    }
00883    break;
00884    /*
00885    #] SPECIALS :
00886    */
00887    case SUBEXPRESSION:
00888    /*
00889    #[ SUBEXPRESSION :
00890    */
00891        dirty = 1;
00892        tstop = t + t[1];
00893        *m++ = *t++;
00894        *m++ = *t++;
00895        *m++ = *t++;
00896        *m++ = *t++;
00897        if ( t[-1] >= 2*MAXPOWER || t[-1] <= -2*MAXPOWER ) {
00898            s = subs;
00899            for ( j = 0; j < i; j++ ) {
00900                if ( *s == SYMTONUM &&
00901                    ( ABS(t[-1]) - 2*MAXPOWER ) == s[2] ) {
00902                    m[-1] = s[3];
00903                    if ( t[-1] < 0 ) m[-1] = -m[-1];
00904                    break;
00905                }
00906                s += s[1];
00907            }
00908        }
00909        *m++ = *t++;
00910        COPYSUB(m,t)
00911        while ( t < tstop ) {
00912            for ( si = 0; si < setflag; si += 2 ) {
00913                if ( t == temp + setlist[si] - 2 ) goto ss7;
00914            }
00915            s = subs;
00916            for ( j = 0; j < i; j++ ) {
00917                if ( s[2] == t[2] ) {
00918                    if ( ( *s <= SYMTOSUB && *t <= SYMTOSUB )
00919                        || ( *s == *t && *s < FROMBRAC )
00920                        || ( *s == VECTOVEC && ( *t == VECTOSUB || *t == VECTOMIN ) )
00921                        || ( *s == VECTOSUB && ( *t == VECTOVEC || *t == VECTOMIN ) )
00922                        || ( *s == VECTOMIN && ( *t == VECTOSUB || *t == VECTOVEC ) )
00923                        || ( *s == INDTOIND && *t == INDTOSUB )
00924                        || ( *s == INDTOSUB && *t == INDTOIND ) ) {
00925                            WORD *vv = m;
00926                            /* *t = *s; Wrong!!! Overwrites compiler buffer */
00927                            j = t[1];
00928                            NCOPY(m,t,j);

```

```

00929                 vv[0] = s[0];
00930                 vv[3] = s[3];
00931                 goto sr7;
00932             }
00933         }
00934         s += s[1];
00935     }
00936 ss7:
00937     j = t[1];
00938     NCOPY(m,t,j);
00939 }
00940 break;
00941 /*
00942 #] SUBEXPRESSION :
00943 */
00944 case EXPRESSION:
00945 /*
00946 #[ EXPRESSION :
00947 */
00948     dirty = 1;
00949     tstop = t + t[1];
00950     v = m;
00951     *m++ = *t++;
00952     *m++ = *t++;
00953     *m++ = *t++;
00954     *m++ = *t++;
00955     s = subs;
00956     for ( j = 0; j < i; j++ ) {
00957         if ( ( ABS(t[-1]) - 2*MAXPOWER ) == s[2] ) {
00958             if ( *s == SYMTONUM ) {
00959                 m[-1] = s[3];
00960                 if ( t[-1] < 0 ) m[-1] = -m[-1];
00961                 break;
00962             }
00963             else if ( *s <= SYMTOSUB ) {
00964                 MLOCK(ErrorMessageLock);
00965                 MesPrint("Wildcard power of expression should be a number");
00966                 MUNLOCK(ErrorMessageLock);
00967                 SETERROR(-1)
00968             }
00969         }
00970         s += s[1];
00971     }
00972     *m++ = *t++;
00973     COPYSUB(m,t)
00974     while ( t < tstop && *t != WILDCARDS ) {
00975         j = t[1];
00976         NCOPY(m,t,j);
00977     }
00978     if ( t < tstop && *t == WILDCARDS ) {
00979         *m++ = *t;
00980         s = sub;
00981         j = s[1];
00982         *m++ = j+2;
00983         NCOPY(m,s,j);
00984         t += t[1];
00985     }
00986     if ( t < tstop && *t == FROMBRAC ) {
00987         w = m;
00988         *m++ = *t;
00989         *m++ = t[1];
00990         if ( WildFill(BHEAD m,t+2,sub) < 0 ) {
00991             MLOCK(ErrorMessageLock);
00992             MesCall("WildFill");
00993             MUNLOCK(ErrorMessageLock);
00994             SETERROR(-1)
00995         }
00996         m += *m;
00997         w[1] = m - w;
00998         t += t[1];
00999     }
01000     while ( t < tstop ) {
01001         j = t[1];
01002         NCOPY(m,t,j);
01003     }
01004     v[1] = m-v;
01005     break;
01006 /*
01007 #] EXPRESSION :
01008 */
01009 default:
01010 /*
01011 #[ FUNCTIONS :
01012 */
01013     if ( *t >= FUNCTION ) {
01014         dflag = 0;
01015         na = 0;

```

```

01016         *m = *t;
01017         for ( si = 0; si < setflag; si += 2 ) {
01018             if ( t == temp + setlist[si] ) {
01019                 dflag = DIRTYFLAG; goto ss8;
01020             }
01021         }
01022         s = subs;
01023         for ( j = 0; j < i; j++ ) {
01024             if ( *s == FUNTOFUN && *t == s[2] )
01025                 { *m = s[3]; dirty = 1; dflag = DIRTYFLAG; break; }
01026             s += s[1];
01027         }
01028 ss8:
01029         v = m;
01030         if ( *t >= FUNCTION && functions[*t-FUNCTION].spec
01031             >= TENSORFUNCTION ) {
01032             if ( *m < FUNCTION || functions[*m-FUNCTION].spec
01033                 < TENSORFUNCTION ) {
01034                 MLOCK(ErrorMessageLock);
01035                 MesPrint("Illegal wildcarding of regular function to tensorfunction");
01036                 MUNLOCK(ErrorMessageLock);
01037                 SETERROR(-1)
01038             }
01039             m++; t++;
01040             *m++ = *t++;
01041             *m++ = *t++ | dflag;
01042             goto Tensors;
01043         }
01044         m++; t++;
01045         *m++ = *t++;
01046         *m++ = *t++ | dflag;
01047         COPYFUN3(m,t)
01048         z = accu;
01049         while ( t < u ) {          /* do an argument */
01050             if ( *t < 0 ) {
01051                 /*
01052                 #[ Simple arguments :
01053                     CBUF *C = cbuf+AT.ebufnum;
01054                     for ( si = 0; si < setflag; si += 2 ) {
01055                         if ( *t <= -FUNCTION ) {
01056                             if ( t == temp + setlist[si] ) {
01057                                 v[2] |= DIRTYFLAG; goto ss10; }
01058                             }
01059                         else {
01060                             if ( t == temp + setlist[si]-1 ) {
01061                                 v[2] |= DIRTYFLAG; goto ss9; }
01062                             }
01063                         }
01064                     if ( *t == -ARGWILD ) {
01065                         s = subs;
01066                         for ( j = 0; j < i; j++ ) {
01067                             if ( *s == ARGTOARG && s[2] == t[1] ) break;
01068                             s += s[1];
01069                         }
01070                         v[2] |= DIRTYFLAG;
01071                         w = C->rhs[s[3]];
01072                         DEBUG(MesPrint("Thread %w(b): s[3] = %d, w=(%d,%d,%d,%d)",s[3],w[0],w[1],w[2],w[3]));
01073                         if ( *w == 0 ) {
01074                             w++;
01075                             while ( *w ) {
01076                                 if ( *w > 0 ) j = *w;
01077                                 else if ( *w <= -FUNCTION ) j = 1;
01078                                 else j = 2;
01079                                 NCOPY(m,w,j);
01080                             }
01081                         }
01082                     else {
01083                         j = *w++;
01084                         while ( --j >= 0 ) {
01085                             if ( *w < MINSPEC ) *m++ = -VECTOR;
01086                             else if ( *w >= 0 && *w < AM.OffsetIndex )
01087                                 *m++ = -SNUMBER;
01088                             else *m++ = -INDEX;
01089                             *m++ = *w++;
01090                         }
01091                     }
01092                     t += 2;
01093                     dirty = 1;
01094                     if ( ( *v == NUMARGSFUN || *v == NUMTERMSFUN )
01095                         && t >= u && m == v + FUNHEAD ) {
01096                         m = v;
01097                         *m++ = SNUMBER; *m++ = 3; *m++ = 0;
01098                         break;
01099                     }
01100                 }
01101                 else if ( *t <= -FUNCTION ) {
01102                     *m = *t;

```



```

01103         s = subs;
01104         for ( j = 0; j < i; j++ ) {
01105             if ( -*t == s[2] ) {
01106                 if ( *s == FUNTOFUN )
01107                     { *m = -s[3]; dirty = 1; v[2] |= DIRTYFLAG; break; }
01108             }
01109             s += s[1];
01110         }
01111         m++; t++;
01112     }
01113     else if ( *t == -SYMBOL ) {
01114         *m++ = *t++;
01115         *m = *t;
01116         s = subs;
01117         for ( j = 0; j < i; j++ ) {
01118             if ( *t == s[2] && *s <= SYMTOSUB ) {
01119                 dirty = 1; v[2] |= DIRTYFLAG;
01120                 if ( AR.PolyFunType == 2 && v[0] == AR.PolyFun )
01121                     v[2] |= MUSTCLEANPRF;
01122                 if ( *s == SYMTOSYM ) *m = s[3];
01123                 else if ( *s == SYMTONUM ) {
01124                     m[-1] = -SNUMBER;
01125                     *m = s[3];
01126                 }
01127                 else if ( *s == SYMTOSUB ) {
01128                     ToSub:
01129                     m--;
01130                     w = C->rhs[s[3]];
01131                     DEBUG(MesPrint("Thread %(c): s[3] = %d, w=(%d,%d,%d,%d)",s[3],w[0],w[1],w[2],w[3]));
01132                     s = m;
01133                     m += 2;
01134                     while ( *w ) {
01135                         j = *w;
01136                         NCOPY(m,w,j);
01137                     }
01138                     *s = WORDDIF(m,s);
01139                     s[1] = 0;
01140                     *m = 0;
01141                     if ( t[-1] == -MINVECTOR ) {
01142                         w = s+2;
01143                         while ( *w ) {
01144                             w += *w;
01145                             w[-1] = -w[-1];
01146                         }
01147                     }
01148                     if ( ToFast(s,s) ) {
01149                         if ( *s <= -FUNCTION ) m = s;
01150                         else m = s + 1;
01151                     }
01152                     else m--;
01153                 }
01154                 break;
01155             }
01156             s += s[1];
01157         }
01158         m++; t++;
01159     }
01160     else if ( *t == -INDEX ) {
01161         *m++ = *t++;
01162         *m = *t;
01163         s = subs;
01164         for ( j = 0; j < i; j++ ) {
01165             if ( *t == s[2] ) {
01166                 if ( *s == INDTOIND || *s == VECTOVEC ) {
01167                     *m = s[3];
01168                     if ( *m < MINSPEC ) m[-1] = -VECTOR;
01169                     else if ( *m >= 0 && *m < AM.OffsetIndex )
01170                         m[-1] = -SNUMBER;
01171                     else m[-1] = -INDEX;
01172                 }
01173                 else if ( *s == VECTOSUB || *s == INDTOSUB ) {
01174                     m[-1] = -INDEX;
01175                     *m = ++AR.CurDum;
01176                     *z++ = SUBEXPRESSION;
01177                     *z++ = 4+SUBEXPSIZE;
01178                     *z++ = s[3]+1;
01179                     *z++ = 1;
01180                     *z++ = AT.ebufnum;
01181                     FILLSUB(z)
01182                     *z++ = INDTOIND;
01183                     *z++ = 4;
01184                     *z++ = FUNNYVEC;
01185                     *z++ = AR.CurDum;
01186                 }
01187                 v[2] |= DIRTYFLAG; dirty = 1;
01188                 break;
01189             }
01190             s += s[1];

```

```

01190         }
01191         m++; t++;
01192     }
01193     else if ( *t == -VECTOR || *t == -MINVECTOR ) {
01194         *m++ = *t++;
01195         *m = *t;
01196         s = subs;
01197         for ( j = 0; j < i; j++ ) {
01198             if ( *t == s[2] ) {
01199                 if ( *s == VECTOVEC ) *m = s[3];
01200                 else if ( *s == VECTOMIN ) {
01201                     *m = s[3];
01202                     if ( t[-1] == -VECTOR )
01203                         m[-1] = -MINVECTOR;
01204                     else
01205                         m[-1] = -VECTOR;
01206                 }
01207                 else if ( *s == VECTOSUB ) goto ToSub;
01208                 dirty = 1; v[2] |= DIRTYFLAG;
01209                 break;
01210             }
01211             s += s[1];
01212         }
01213         m++; t++;
01214     }
01215     else if ( *t == -SNUMBER ) {
01216         *m++ = *t++;
01217         *m = *t;
01218         s = subs;
01219         for ( j = 0; j < i; j++ ) {
01220             if ( *t == s[2] && *s >= NUMTONUM && *s <= NUMTOSUB ) {
01221                 dirty = 1; v[2] |= DIRTYFLAG;
01222                 if ( *s == NUMTONUM ) *m = s[3];
01223                 else if ( *s == NUMTOSYM ) {
01224                     m[-1] = -SYMBOL;
01225                     *m = s[3];
01226                 }
01227                 else if ( *s == NUMTOIND ) {
01228                     m[-1] = -INDEX;
01229                     *m = s[3];
01230                 }
01231                 else if ( *s == NUMTOSUB ) goto ToSub;
01232                 break;
01233             }
01234             s += s[1];
01235         }
01236         m++; t++;
01237     }
01238     else {
01239 ss9:         *m++ = *t++;
01240 ss10:      *m++ = *t++;
01241     }
01242     na = WORDDIF(z,accu);
01243     /*
01244     #] Simple arguments :
01245     */
01246     }
01247     else {
01248         w = m;
01249         zz = t;
01250         NEXTARG(zz)
01251         odirt = AN.WildDirt; AN.WildDirt = 0;
01252         AR.CompressPointer = accu + na;
01253         for ( j = 0; j < ARGHEAD; j++ ) *m++ = *t++;
01254         j = 0;
01255         adirt = 0;
01256         while ( t < zz ) { /* do a term */
01257             if ( ( len = WildFill(BHEAD m,t,sub) ) < 0 ) {
01258                 MLOCK(ErrorMessageLock);
01259                 MesCall("WildFill");
01260                 MUNLOCK(ErrorMessageLock);
01261                 SETERROR(-1)
01262             }
01263             if ( AN.WildDirt ) {
01264                 adirt = AN.WildDirt;
01265                 AN.WildDirt = 0;
01266             }
01267             m += len;
01268             t += *t;
01269         }
01270         *w = WORDDIF(m,w); /* Fill parameter length */
01271         if ( adirt ) {
01272             dirty = w[1] = 1; v[2] |= DIRTYFLAG;
01273             if ( AR.PolyFunType == 2 && v[0] == AR.PolyFun )
01274                 v[2] |= MUSTCLEANPRF;
01275             AN.WildDirt = adirt;
01276         }

```

```

01277         else {
01278             AN.WildDirt = odirt;
01279         }
01280         if ( ToFast(w,w) ) {
01281             if ( *w <= -FUNCTION ) {
01282                 if ( *w == NUMARGSFUN || *w == NUMTERMSFUN ) {
01283                     *w = -SNUMBER; w[1] = 0; m = w + 2;
01284                 }
01285                 else m = w+1;
01286             }
01287             else m = w+2;
01288         }
01289         AR.CompressPointer = oldcpointer;
01290     }
01291 }
01292 v[1] = WORDDIF(m,v);          /* Fill function length */
01293 s = accu;
01294 NCOPY(m,s,na);
01295 /*
01296
01297 */
01298 Now some code to speed up a few special cases
01299
01300 if ( v[0] == EXPONENT ) {
01301     if ( v[1] == FUNHEAD+4 && v[FUNHEAD] == -SYMBOL &&
01302         v[FUNHEAD+2] == -SNUMBER && v[FUNHEAD+3] < MAXPOWER
01303         && v[FUNHEAD+3] > -MAXPOWER ) {
01304         v[0] = SYMBOL;
01305         v[1] = 4;
01306         v[2] = v[FUNHEAD+1];
01307         v[3] = v[FUNHEAD+3];
01308         m = v+4;
01309     }
01310     else if ( v[1] == FUNHEAD+ARGHEAD+11
01311         && v[FUNHEAD] == ARGHEAD+9
01312         && v[FUNHEAD+ARGHEAD] == 9
01313         && v[FUNHEAD+ARGHEAD+1] == DOTPRODUCT
01314         && v[FUNHEAD+ARGHEAD+8] == 3
01315         && v[FUNHEAD+ARGHEAD+7] == 1
01316         && v[FUNHEAD+ARGHEAD+6] == 1
01317         && v[FUNHEAD+ARGHEAD+5] == 1
01318         && v[FUNHEAD+ARGHEAD+9] == -SNUMBER
01319         && v[FUNHEAD+ARGHEAD+10] < MAXPOWER
01320         && v[FUNHEAD+ARGHEAD+10] > -MAXPOWER ) {
01321         v[0] = DOTPRODUCT;
01322         v[1] = 5;
01323         v[2] = v[FUNHEAD+ARGHEAD+3];
01324         v[3] = v[FUNHEAD+ARGHEAD+4];
01325         v[4] = v[FUNHEAD+ARGHEAD+10];
01326         m = v+5;
01327     }
01328 }
01329 else { while ( t < u ) *m++ = *t++; }
01330
01331 #] FUNCTIONS :
01332
01333 }
01334 t = uu;
01335 } while ( t < r );
01336 t = from;          /* Copy coefficient */
01337 t += *t;
01338 if ( r < t ) do { *m++ = *r++; } while ( r < t );
01339 if ( ( sgn & 1 ) != 0 ) m[-1] = -m[-1];
01340 *to = WORDDIF(m,to);
01341 if ( dirty ) AN.WildDirt = dirty;
01342 return(*to);
01343 }
01344
01345 /*
01346
01347 #] WildFill :
01348 #[ ResolveSet :          WORD ResolveSet(from,to,subs)
01349
01350 The set syntax is:
01351 SET,length,subterm,where,whichmember[,where,whichmember]
01352
01353 setlength is 2*n+1 with n the number of set substitutions.
01354 length = setlength + subtermlength + 2
01355
01356 At `where' is the number of the set and `whichmember' is the
01357 number of the element. This is still a symbol/dollar and we
01358 have to find the substitution in the wildcards.
01359 The output is the subterm in which the setelements have been
01360 substituted. This is ready for further wildcard substitutions.
01361 */
01362 int ResolveSet(PHEAD WORD *from, WORD *to, WORD *subs)
01363 {
01364     GETBIDENTITY

```

```

01364     WORD *m, *s, *w, j, i, ii, i3, flag, num;
01365     DOLLARS d = 0;
01366 #ifdef WITHPTHREADS
01367     int nummodopt, dtype = -1;
01368 #endif
01369     m = to;                                /* pointer in output */
01370     s = from + 2;
01371     w = s + s[1];
01372     while ( s < w ) *m++ = *s++;
01373     j = (from[1] - WORDDIF(w,from) ) >> 1;
01374     m = subs + subs[1];
01375     subs += SUBEXPSIZE;
01376     s = subs;
01377     i = 0;
01378     while ( s < m ) { i++; s += s[1]; }
01379     m = to;
01380     if ( *m >= FUNCTION && functions[*m-FUNCTION].spec
01381     >= TENSORFUNCTION ) flag = 0;
01382     else flag = 1;
01383     while ( --j >= 0 ) {
01384         if ( w[1] >= 0 ) {
01385             s = subs;
01386             for ( ii = 0; ii < i; ii++ ) {
01387                 if ( *s == SYMNUM && s[2] == w[1] ) { num = s[3]; goto GotOne; }
01388                 s += s[1];
01389             }
01390             MLOCK(ErrorMessageLock);
01391             MesPrint(" Unresolved setelement during substitution");
01392             MUNLOCK(ErrorMessageLock);
01393             return(-1);
01394         }
01395         else { /* Dollar ! */
01396             d = Dollars - w[1];
01397 #ifdef WITHPTHREADS
01398             if ( AS.MultiThreaded ) {
01399                 for ( nummodopt = 0; nummodopt < NumModOptdollars; nummodopt++ ) {
01400                     if ( -w[1] == ModOptdollars[nummodopt].number ) break;
01401                 }
01402                 if ( nummodopt < NumModOptdollars ) {
01403                     dtype = ModOptdollars[nummodopt].type;
01404                     if ( dtype == MODLOCAL ) {
01405                         d = ModOptdollars[nummodopt].dstruct+AT.identity;
01406                     }
01407                     else {
01408                         LOCK(d->pthreadlockread);
01409                     }
01410                 }
01411             }
01412 #endif
01413             if ( d->type == DOLNUMBER || d->type == DOLTERMS ) {
01414                 if ( d->where[0] == 4 && d->where[3] == 3 && d->where[2] == 1
01415                 && d->where[1] > 0 && d->where[4] == 0 ) {
01416                     num = d->where[1]; goto GotOne;
01417                 }
01418             }
01419             else if ( d->type == DOLINDEX ) {
01420                 if ( d->index > 0 && d->index < AM.OffsetIndex ) {
01421                     num = d->index; goto GotOne;
01422                 }
01423             }
01424             else if ( d->type == DOLARGUMENT ) {
01425                 if ( d->where[0] == -SNUMBER && d->where[1] > 0 ) {
01426                     num = d->where[1]; goto GotOne;
01427                 }
01428             }
01429             else if ( d->type == DOLWILDARGS ) {
01430                 if ( d->where[0] == 1 &&
01431                 d->where[1] > 0 && d->where[1] < AM.OffsetIndex ) {
01432                     num = d->where[1]; goto GotOne;
01433                 }
01434                 if ( d->where[0] == 0 && d->where[1] < 0 && d->where[3] == 0 ) {
01435                     if ( ( d->where[1] == -SNUMBER && d->where[2] > 0 )
01436                     || ( d->where[1] == -INDEX && d->where[2] > 0
01437                     && d->where[2] < AM.OffsetIndex ) ) {
01438                         num = d->where[2]; goto GotOne;
01439                     }
01440                 }
01441             }
01442 #ifdef WITHPTHREADS
01443             if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01444 #endif
01445             MLOCK(ErrorMessageLock);
01446             MesPrint("Unusable type of variable %s in set substitution",
01447                 AC.dollarname->namebuffer+d->name);
01448             MUNLOCK(ErrorMessageLock);
01449             return(-1);
01450         }
01451     }

```

```

01451 GotOne;;
01452 #ifdef WITHPTHREADS
01453     if ( dtype > 0 && dtype != MODLOCAL ) { UNLOCK(d->pthreadlockread); }
01454 #endif
01455     ii = m[*w];
01456     if ( ii >= 2*MAXPOWER ) i3 = ii - 2*MAXPOWER;
01457     else if ( ii <= -2*MAXPOWER ) i3 = -ii - 2*MAXPOWER;
01458     else i3 = ( ii >= 0 ) ? ii: -ii - 1;
01459
01460     if ( num > ( Sets[i3].last - Sets[i3].first ) || num <= 0 ) {
01461         MLOCK(ErrorMessageLock);
01462         MesPrint("Array bound check during set substitution");
01463         MesPrint("    value is %d",num);
01464         MUNLOCK(ErrorMessageLock);
01465         return(-1);
01466     }
01467     m[*w] = (SetElements+Sets[i3].first)[num-1];
01468     if ( Sets[i3].type == CSYMBOL && m[*w] > MAXPOWER ) {
01469         if ( ii >= 2*MAXPOWER ) m[*w] -= 2*MAXPOWER;
01470         else if ( ii <= -2*MAXPOWER ) m[*w] = -(m[*w] - 2*MAXPOWER);
01471         else {
01472             m[*w] -= MAXPOWER;
01473             if ( m[*w] < MAXPOWER ) m[*w] -= 2*MAXPOWER;
01474             if ( flag ) MakeDirty(m,m+*w,1);
01475         }
01476     }
01477     else if ( Sets[i3].type == CSYMBOL ) {
01478         if ( ii >= 2*MAXPOWER ) m[*w] += 2*MAXPOWER;
01479         else if ( ii <= -2*MAXPOWER ) m[*w] = -m[*w] - 2*MAXPOWER;
01480         else if ( ii < 0 ) m[*w] = - m[*w];
01481     }
01482     else if ( ii < 0 ) m[*w] = - m[*w];
01483     w += 2;
01484 }
01485 m = to;
01486 if ( *m >= FUNCTION && functions[*m-FUNCTION].spec
01487 >= TENSORFUNCTION ) {
01488     w = from + 2 + from[3];
01489     if ( *w == 0 ) { /* We had function -> tensor */
01490         m = from + 2 + FUNHEAD; s = to + FUNHEAD;
01491         while ( m < w ) {
01492             if ( *m == -INDEX || *m == -VECTOR ) {}
01493             else if ( *m == -ARGWILD ) { *s++ = FUNNYWILD; }
01494             else {
01495                 MLOCK(ErrorMessageLock);
01496                 MesPrint("Illegal argument in tensor after set substitution");
01497                 MUNLOCK(ErrorMessageLock);
01498                 SETERROR(-1)
01499             }
01500             *s++ = m[1];
01501             m += 2;
01502         }
01503         to[1] = WORDDIF(s,to);
01504     }
01505 }
01506 return(0);
01507 }
01508
01509 /*
01510     #] ResolveSet :
01511     #[ ClearWild :          void ClearWild()
01512
01513     Clears the current wildcard settings and makes them ready for
01514     CheckWild and AddWild.
01515
01516 */
01517
01518 void ClearWild(PHEAD0)
01519 {
01520     GETBIDENTITY
01521     WORD n, nn, *w;
01522     n = (AN.WildValue[-SUBEXPSIZE+1]-SUBEXPSIZE)/4; /* Number of wildcards */
01523     AN.NumWild = nn = n;
01524     if ( n > 0 ) {
01525         w = AT.WildMask;
01526         do { *w++ = 0; } while ( --n > 0 );
01527         w = AN.WildValue;
01528         do {
01529             if ( *w == SYMTONUM ) *w = SYMTOSYM;
01530             w += w[1];
01531         } while ( --nn > 0 );
01532     }
01533 }
01534
01535 /*
01536     #] ClearWild :
01537     #[ AddWild :          WORD AddWild(oldnumber,type,newnumber)

```

```

01538
01539     Adds a wildcard assignment.
01540     Extra parameter in AN.argaddress;
01541
01542 */
01543
01544 int AddWild(PHEAD WORD oldnumber, WORD type, WORD newnumber)
01545 {
01546     GETBIDENTITY
01547     WORD *w, *m, n, k, i = -1;
01548     CBUF *C = cbuf+AT.ebufnum;
01549     WORD eattensor = type & EATTENSOR;
01550     type = type & ~EATTENSOR;
01551     DEBUG(WORD *mm;)
01552     AN.WildReserve = 0;
01553     m = AT.WildMask;
01554     w = AN.WildValue;
01555     n = AN.NumWild;
01556     if ( n <= 0 ) { return(-1); }
01557     if ( type <= SYMTOSUB ) {
01558         do {
01559             if ( w[2] == oldnumber && *w <= SYMTOSUB ) {
01560                 if ( n > 1 && w[4] == SETTONUM ) i = w[7];
01561                 *w = type;
01562                 if ( *m != 2 ) *m = 1;
01563                 if ( type != SYMTOSUB ) {
01564                     if ( type == SYMTONUM ) AN.MaskPointer = m;
01565                     w[3] = newnumber;
01566                     goto FlipOn;
01567                 }
01568                 m = AddRHS(AT.ebufnum,1);
01569                 w[3] = C->numrhs;
01570                 w = AN.argaddress;
01571                 DEBUG(mm = m;)
01572                 n = *w - ARGHEAD;
01573                 w += ARGHEAD;
01574                 while ( (m + n + 10) > C->Top ) m = DoubleCbuffer(AT.ebufnum,m,4);
01575                 while ( --n >= 0 ) *m++ = *w++;
01576                 *m++ = 0;
01577                 C->rhs[C->numrhs+1] = m;
01578                 DEBUG(MesPrint("Thread %w(d): m=(%d,%d,%d,%d) (%d)",mm[0],mm[1],mm[2],mm[3],C->numrhs);)
01579                 C->Pointer = m;
01580                 goto FlipOn;
01581             }
01582             m++; w += w[1];
01583         } while ( --n > 0 );
01584     }
01585     else if ( type == ARGTOARG ) {
01586         do {
01587             if ( w[2] == oldnumber && *w == ARGTOARG ) {
01588                 *m = 1;
01589                 m = AddRHS(AT.ebufnum,1);
01590                 w[3] = C->numrhs;
01591                 w = AN.argaddress;
01592                 DEBUG(mm=m;)
01593                 if ( eattensor ) {
01594                     n = newnumber;
01595                     *m++ = n;
01596                     w = AN.argaddress;
01597                 }
01598                 else {
01599                     while ( --newnumber >= 0 ) { NEXTARG(w) }
01600                     n = WORDDIF(w,AN.argaddress);
01601                     w = AN.argaddress;
01602                     *m++ = 0;
01603                 }
01604                 while ( (m + n + 10) > C->Top ) m = DoubleCbuffer(AT.ebufnum,m,5);
01605                 DEBUG(if ( mm != m-1 ) MesPrint("Thread %w(e): Alarm!"); mm = m-1;)
01606                 while ( --n >= 0 ) *m++ = *w++;
01607                 *m++ = 0;
01608                 C->rhs[C->numrhs+1] = m;
01609                 C->Pointer = m;
01610                 DEBUG(MesPrint("Thread %w(e): w=(%d,%d,%d,%d) (%d)",mm[0],mm[1],mm[2],mm[3],C->numrhs);)
01611                 return(0);
01612             }
01613             m++; w += w[1];
01614         } while ( --n > 0 );
01615     }
01616     else if ( type == ARLTOARL ) {
01617         do {
01618             if ( w[2] == oldnumber && *w == ARGTOARG ) {
01619                 WORD **a;
01620                 *m = 1;
01621                 m = AddRHS(AT.ebufnum,1);
01622                 w[3] = C->numrhs;
01623                 DEBUG(mm=m;)
01624                 a = (WORD **) (AN.argaddress); n = 0; k = newnumber;

```

```

01625         while ( --newnumber >= 0 ) {
01626             w = *a++;
01627             if ( *w > 0 ) n += *w;
01628             else if ( *w <= -FUNCTION ) n++;
01629             else n += 2;
01630         }
01631         *m++ = 0;
01632         while ( (m + n + 10) > C->Top ) m = DoubleCbuffer(AT.ebufnum,m,6);
01633     DEBUG(if ( mm != m-1 ) MesPrint("Thread %w(f): Alarm!"); mm = m-1;)
01634     a = (WORD *) (AN.argaddress);
01635     while ( --k >= 0 ) {
01636         w = *a++;
01637         if ( *w > 0 ) { n = *w; NCOPY(m,w,n); }
01638         else if ( *w <= -FUNCTION ) *m++ = *w++;
01639         else { *m++ = *w++; *m++ = *w++; }
01640     }
01641     *m++ = 0;
01642     C->rhs[C->numrhs+1] = m;
01643     DEBUG(MesPrint("Thread %w(f): w=(%d,%d,%d,%d) (%d)",mm[0],mm[1],mm[2],mm[3],C->numrhs);)
01644     C->Pointer = m;
01645     return(0);
01646 }
01647     m++; w += w[1];
01648 } while ( --n > 0 );
01649 }
01650 else if ( type == VECTOSUB || type == INDTOISUB ) {
01651     WORD *ss, *sstop, *tt, *ttstop, j, *v1, *v2 = 0;
01652     do {
01653         if ( w[2] == oldnumber && ( *w == type ||
01654             ( type == VECTOSUB && ( *w == VECTOVEC || *w == VECTOMIN ) )
01655             || ( type == INDTOISUB && *w == INDTOIND ) ) ) {
01656             if ( n > 1 && w[4] == SETTONUM ) i = w[7];
01657             *w = type;
01658             *m = 1;
01659             m = AddRHS(AT.ebufnum,1);
01660             w[3] = C->numrhs;
01661             w = AN.argaddress;
01662             n = *w - ARGHEAD;
01663             w += ARGHEAD;
01664             while ( (m + n + 10) > C->Top ) m = DoubleCbuffer(AT.ebufnum,m,7);
01665             while ( --n >= 0 ) *m++ = *w++;
01666             *m++ = 0;
01667             C->rhs[C->numrhs+1] = m;
01668             C->Pointer = m;
01669             m = AddRHS(AT.ebufnum,1);
01670             w = AN.argaddress;
01671             n = *w - ARGHEAD;
01672             w += ARGHEAD;
01673             while ( (m + n + 10) > C->Top ) m = DoubleCbuffer(AT.ebufnum,m,8);
01674             sstop = w + n;
01675             while ( w < sstop ) { /* Run over terms */
01676                 tt = w + *w; ttstop = tt - ABS(tt[-1]);
01677                 ss = m; m++; w++;
01678                 while ( w < ttstop ) { /* Subterms */
01679                     if ( *w != INDEX ) {
01680                         j = w[1];
01681                         NCOPY(m,w,j);
01682                     }
01683                     else {
01684                         v1 = m;
01685                         *m++ = *w++;
01686                         *m++ = j = *w++;
01687                         j -= 2;
01688                         while ( --j >= 0 ) {
01689                             if ( *w >= MINSPEC ) *m++ = *w++;
01690                             else v2 = w++;
01691                         }
01692                         j = WORDDIF(m,v1);
01693                         if ( j != v1[1] ) {
01694                             if ( j <= 2 ) m -= 2;
01695                             else v1[1] = j;
01696                             *m++ = VECTOR;
01697                             *m++ = 4;
01698                             *m++ = *v2;
01699                             *m++ = FUNNYVEC;
01700                         }
01701                     }
01702                 }
01703                 while ( w < tt ) *m++ = *w++;
01704                 *ss = WORDDIF(m,ss);
01705             }
01706             *m++ = 0;
01707             C->rhs[C->numrhs+1] = m;
01708             C->Pointer = m;
01709             if ( m > C->Top ) {
01710                 MLOCK(ErrorMessageLock);
01711                 MesPrint("Internal problems with extra compiler buffer");

```

```

01712             MUNLOCK(ErrorMessageLock);
01713             Terminate(-1);
01714         }
01715         goto FlipOn;
01716     }
01717     m++; w += w[1];
01718     } while ( --n > 0 );
01719 }
01720 else {
01721     do {
01722         if ( w[2] == oldnumber && ( *w == type || ( type == VECTOVEC
01723             && ( *w == VECTOMIN || *w == VECTOSUB ) ) || ( type == VECTOMIN
01724             && ( *w == VECTOVEC || *w == VECTOSUB ) )
01725             || ( type == INDTOIND && *w == INDTOISUB ) ) ) {
01726             if ( n > 1 && w[4] == SETTONUM ) i = w[7];
01727             *w = type;
01728             w[3] = newnumber;
01729             *m = 1;
01730             goto FlipOn;
01731         }
01732         m++; w += w[1];
01733     } while ( --n > 0 );
01734 }
01735 MLOCK(ErrorMessageLock);
01736 MesPrint("Bug in AddWild.");
01737 MUNLOCK(ErrorMessageLock);
01738 return(-1);
01739 FlipOn:
01740 if ( i >= 0 ) {
01741     m = AT.WildMask;
01742     w = AN.WildValue;
01743     n = AN.NumWild;
01744     while ( --n >= 0 ) {
01745         if ( w[2] == i && *w == SYMTONUM ) {
01746             *m = 2;
01747             return(0);
01748         }
01749         m++; w += w[1];
01750     }
01751     MLOCK(ErrorMessageLock);
01752     MesPrint(" Bug in AddWild with passing set[i]");
01753     MUNLOCK(ErrorMessageLock);
01754 }
01755 /*
01756     For the moment we want to crash here. That is easier with debugging.
01757 */
01758 #ifdef WITHPTHREADS
01759 { WORD *s = 0;
01760     *s++ = 1;
01761 }
01762 #endif
01763 Terminate(-1);
01764 }
01765 return(0);
01766 }
01767 /*
01768     #] AddWild :
01769     #[ CheckWild :          WORD CheckWild(oldnumber,type,newnumber,newval)
01770
01771     Tests whether a wildcard assignment is allowed.
01772     A return value of zero means that it is allowed (nihil obstat).
01773     If the variable has been assigned already its existing
01774     assignment is returned in AN.oldvalue and AN.oldtype, which are
01775     global variables.
01776
01777     Note the special problem with name?set[i]. Here we have to pass
01778     an extra assignment. This cannot be done via globals as we
01779     call CheckWild sometimes twice before calling AddWild.
01780     Trick: Check the assignment of the number and if OK put it
01781     in place, but don't alter the used flag (if needed).
01782     Then AddWild can alter the used flag but the value is there.
01783     As long as this trick is 'hanging' we turn on the flag:
01784     'AN.WildReserve' which is either turned off by AddWild or by
01785     a failing call to CheckWild.
01786
01787     With ARGTOARG the tensors give the number of arguments
01788     or-ed with EATTENSOR which is at least 8192.
01789 */
01790
01791 int CheckWild(PHEAD WORD oldnumber, WORD type, WORD newnumber, WORD *newval)
01792 {
01793     GETBIDENTITY
01794     WORD *w, *m, *s, n, old2, inset;
01795     WORD n2, oldval, dirty, i, j;
01796     int notflag = 0, retblock = 0;
01797     CBUF *C = cbuf+AT.ebufnum;
01798     WORD eattensor = type & EATTENSOR;

```



```

01799     type = type & ~EATTENSOR;
01800     m = AT.WildMask;
01801     w = AN.WildValue;
01802     n = AN.NumWild;
01803     if ( n <= 0 ) { AN.oldtype = -1; AN.WildReserve = 0; return(-1); }
01804     switch ( type ) {
01805     case SYMTONUM :
01806         *newval = newnumber;
01807         do {
01808             if ( w[2] == oldnumber && *w <= SYMTOSUB ) {
01809                 old2 = *w;
01810                 if ( !*m ) goto TestSet;
01811                 AN.MaskPointer = m;
01812                 if ( *w == SYMTONUM && w[3] == newnumber ) {
01813                     return(0);
01814                 }
01815                 AN.oldtype = old2; AN.oldvalue = w[3]; goto NoMatch;
01816             }
01817             m++; w += w[1];
01818         } while ( --n > 0 );
01819         break;
01820     case SYMTOSYM :
01821         *newval = newnumber;
01822         do {
01823             if ( w[2] == oldnumber && *w <= SYMTOSUB ) {
01824                 old2 = *w;
01825                 if ( *w == SYMTOSYM ) {
01826                     if ( !*m ) goto TestSet;
01827                     if ( newnumber >= 0 && (w+4) < AN.WildStop
01828                         && ( w[4] == FROMSET || w[4] == SETTONUM )
01829                         && w[7] >= 0 ) goto TestSet;
01830                     if ( w[3] == newnumber ) return(0);
01831                 }
01832                 else {
01833                     if ( !*m ) goto TestSet;
01834                 }
01835                 goto NoM;
01836             }
01837             m++; w += w[1];
01838         } while ( --n > 0 );
01839         break;
01840     case SYMTOSUB :
01841     /*
01842         Now newval contains the pointer to the argument.
01843     */
01844     {
01845     /*
01846         Search for vector or index nature. If so: reject.
01847     */
01848         WORD *ss, *sstop, *tt, *ttstop;
01849         ss = newval;
01850         sstop = ss + *ss;
01851         ss += ARGHEAD;
01852         while ( ss < sstop ) {
01853             tt = ss + *ss;
01854             ttstop = tt - ABS(tt[-1]);
01855             ss++;
01856             while ( ss < ttstop ) {
01857                 if ( *ss == INDEX ) goto NoMatch;
01858                 ss += ss[1];
01859             }
01860             ss = tt;
01861         }
01862     }
01863     do {
01864         if ( w[2] == oldnumber && *w <= SYMTOSUB ) {
01865             old2 = *w;
01866             if ( *w == SYMTONUM || *w == SYMTOSYM ) {
01867                 if ( !*m ) {
01868                     s = w + w[1];
01869                     if ( s >= AN.WildStop || *s != SETTONUM )
01870                         goto TestSet;
01871                 }
01872             }
01873             else if ( *w == SYMTOSUB ) {
01874                 if ( !*m ) {
01875                     s = w + w[1];
01876                     if ( s >= AN.WildStop || *s != SETTONUM )
01877                         goto TestSet;
01878                 }
01879                 n = *newval - 2;
01880                 newval += 2;
01881                 m = C->rhs[w[3]];
01882                 if ( (C->rhs[w[3]+1] - m - 1) == n ) {
01883                     while ( n > 0 ) {
01884                         if ( *m != *newval ) {
01885                             m++; newval++; break;

```

```

01886             }
01887             m++; newval++;
01888             n--;
01889         }
01890         if ( n <= 0 ) return(0);
01891     }
01892 }
01893 AN.oldtype = old2; AN.oldvalue = w[3]; goto NoMatch;
01894 }
01895 m++; w += w[1];
01896 } while ( --n > 0 );
01897 break;
01898 case ARGTOARG :
01899 do {
01900     if ( w[2] == oldnumber && *w == ARGTOARG ) {
01901         if ( !*m ) return(0); /* nihil obstat */
01902         m = C->rhs[w[3]];
01903         if ( eattensor ) {
01904             n = newnumber;
01905             if ( *m != 0 ) {
01906                 if ( n == *m ) {
01907                     m++;
01908                     while ( --n >= 0 ) {
01909                         if ( *m != *newval ) {
01910                             m++; newval++; break;
01911                         }
01912                         m++; newval++;
01913                     }
01914                     if ( n < 0 ) return(0);
01915                 }
01916             }
01917             else {
01918                 m++;
01919                 while ( --n >= 0 ) {
01920                     if ( *newval != m[1] || ( *m != -INDEX
01921                         && *m != -VECTOR && *m != -SNUMBER ) ) break;
01922                     m += 2;
01923                     newval++;
01924                 }
01925                 if ( n < 0 && *m == 0 ) return(0);
01926             }
01927         }
01928         else {
01929             i = newnumber;
01930             if ( *m != 0 ) { /* Tensor field */
01931                 if ( *m == i ) {
01932                     m++;
01933                     while ( --i >= 0 ) {
01934                         if ( *m != newval[1]
01935                             || ( *newval != -VECTOR
01936                                 && *newval != -INDEX
01937                                 && *newval != -SNUMBER ) ) break;
01938                         newval += 2;
01939                         m++;
01940                     }
01941                     if ( i < 0 ) return(0);
01942                 }
01943             }
01944             else {
01945                 m++;
01946                 s = newval;
01947                 while ( --i >= 0 ) { NEXTARG(s) }
01948                 n = WORDDIF(s,newval);
01949                 while ( --n >= 0 ) {
01950                     if ( *m != *newval ) {
01951                         m++; newval++; break;
01952                     }
01953                     m++; newval++;
01954                 }
01955                 if ( n < 0 && *m == 0 ) return(0);
01956             }
01957         }
01958         AN.oldtype = *w; AN.oldvalue = w[3]; goto NoMatch;
01959     }
01960     m++; w += w[1];
01961 } while ( --n > 0 );
01962 break;
01963 case ARLOARL :
01964 do {
01965     if ( w[2] == oldnumber && *w == ARGTOARG ) {
01966         WORD **a;
01967         if ( !*m ) return(0); /* nihil obstat */
01968         m = C->rhs[w[3]];
01969         i = newnumber;
01970         a = (WORD **)newval;
01971         if ( *m != 0 ) { /* Tensor field */
01972             if ( *m == i ) {

```

```

01973             m++;
01974             while ( --i >= 0 ) {
01975                 s = *a++;
01976                 if ( *m != s[1]
01977                     || ( *s != -VECTOR
01978                         && *s != -INDEX
01979                         && *s != -SNUMBER ) ) break;
01980                 m++;
01981             }
01982             if ( i < 0 ) return(0);
01983         }
01984     }
01985     else {
01986         m++;
01987         while ( --i >= 0 ) {
01988             s = *a++;
01989             if ( *s > 0 ) {
01990                 n = *s;
01991                 while ( --n >= 0 ) {
01992                     if ( *s != *m ) {
01993                         s++; m++; break;
01994                     }
01995                     s++; m++;
01996                 }
01997                 if ( n >= 0 ) break;
01998             }
01999             else if ( *s <= -FUNCTION ) {
02000                 if ( *s != *m ) {
02001                     s++; m++; break;
02002                 }
02003                 s++; m++;
02004             }
02005             else {
02006                 if ( *s != *m ) {
02007                     s++; m++; break;
02008                 }
02009                 s++; m++;
02010                 if ( *s != *m ) {
02011                     s++; m++; break;
02012                 }
02013                 s++; m++;
02014             }
02015         }
02016         if ( i < 0 && *m == 0 ) return(0);
02017     }
02018     AN.oldtype = *w; AN.oldvalue = w[3]; goto NoMatch;
02019 }
02020 m++; w += w[1];
02021 } while ( --n > 0 );
02022 break;
02023 case VECTOSUB :
02024 case INDITOSUB :
02025 /*
02026     Now newval contains the pointer to the argument(s).
02027 */
02028 {
02029 /*
02030     Search for vector or index nature. If not so: reject.
02031 */
02032     WORD *ss, *sstop, *tt, *ttstop, count, jt;
02033     ss = newval;
02034     sstop = ss + *ss;
02035     ss += ARGHEAD;
02036     while ( ss < sstop ) {
02037         tt = ss + *ss;
02038         ttstop = tt - ABS(tt[-1]);
02039         ss++;
02040         count = 0;
02041         while ( ss < ttstop ) {
02042             if ( *ss == INDEX ) {
02043                 jt = ss[1] - 2; ss += 2;
02044                 while ( --jt >= 0 ) {
02045                     if ( *ss < MINSPEC ) count++;
02046                     ss++;
02047                 }
02048             }
02049             else ss += ss[1];
02050         }
02051         if ( count != 1 ) goto NoMatch;
02052         ss = tt;
02053     }
02054 }
02055 do {
02056     if ( w[2] == oldnumber ) {
02057         old2 = *w;
02058         if ( ( type == VECTOSUB && ( *w == VECTOVEC || *w == VECTOMIN ) )
02059             || ( type == INDITOSUB && *w == INDTOIND ) ) {

```

```

02060             if ( !*m ) goto TestSet;
02061             AN.oldtype = old2; AN.oldvalue = w[3]; goto NoMatch;
02062         }
02063         else if ( *w == type ) {
02064             if ( !*m ) goto TestSet;
02065             if ( type != INDTOIND && type != INTDOSUB ) { /* Prevent double index */
02066                 n = *newval - 2;
02067                 newval += 2;
02068                 m = C->rhs[w[3]];
02069                 if ( (C->rhs[w[3]+1] - m - 1) == n ) {
02070                     while ( n > 0 ) {
02071                         if ( *m != *newval ) {
02072                             m++; newval++; break;
02073                         }
02074                         m++; newval++;
02075                         n--;
02076                     }
02077                     if ( n <= 0 ) return(0);
02078                 }
02079             }
02080             AN.oldtype = old2; AN.oldvalue = w[3]; goto NoMatch;
02081         }
02082     }
02083     m++; w += w[1];
02084 } while ( --n > 0 );
02085 break;
02086 default :
02087     *newval = newnumber;
02088     do {
02089         if ( w[2] == oldnumber ) {
02090             if ( *w == type ) {
02091                 old2 = *w;
02092                 if ( !*m ) goto TestSet;
02093                 if ( newnumber >= 0 && (w+4) < AN.WildStop &&
02094                     ( w[4] == FROMSET || w[4] == SETTONUM )
02095                     && w[7] >= 0 ) goto TestSet;
02096                 if ( newnumber < 0 && *w == VECTOVEC
02097                     && (w+4) < AN.WildStop && ( w[4] == FROMSET
02098                     || w[4] == SETTONUM ) && w[7] >= 0 ) goto TestSet;
02099             /*
02100             The next statement kills multiple indices -> vector
02101             */
02102             if ( *w == INDTOIND && w[3] < 0 ) goto NoMatch;
02103             if ( w[3] == newnumber ) {
02104                 if ( *w != FUNTOFUN || newnumber < FUNCTION
02105                     || functions[newnumber-FUNCTION].spec ==
02106                     functions[oldnumber-FUNCTION].spec )
02107                     return(0);
02108             }
02109             AN.oldtype = old2; AN.oldvalue = w[3]; goto NoMatch;
02110         }
02111         else if ( ( type == VECTOVEC &&
02112             ( *w == VECTOSUB || *w == VECTOMIN ) )
02113             || ( type == INDTOIND && *w == INTDOSUB ) ) {
02114             if ( *m ) goto NoMatch;
02115             old2 = *w;
02116             goto TestSet;
02117         }
02118         else if ( type == VECTOMIN &&
02119             ( *w == VECTOSUB || *w == VECTOVEC ) ) {
02120             if ( *m ) goto NoMatch;
02121             old2 = *w;
02122             goto TestSet;
02123         }
02124     }
02125     m++; w += w[1];
02126     if ( n > 1 && ( *w == FROMSET
02127         || *w == SETTONUM ) ) { n--; m++; w += w[1]; }
02128 } while ( --n > 0 );
02129 break;
02130 }
02131 AN.oldtype = -1;
02132 AN.oldvalue = -1;
02133 AN.WildReserve = 0;
02134 MLOCK(ErrorMessageLock);
02135 MesPrint("Inconsistency in Wildcard prototype.");
02136 MUNLOCK(ErrorMessageLock);
02137 return(-1);
02138 NoMatch:
02139 AN.WildReserve = 0;
02140 return(1+retblock);
02141 /*
02142 Here we test the compatibility with a set specification.
02143 */
02144 TestSet:
02145 dirty = *m;
02146 oldval = w[3];

```

```

02147     w += w[1];
02148     if ( w < AN.WildStop && ( *w == FROMSET || *w == SETTONUM ) ) {
02149         WORD k;
02150         s = w;
02151         j = w[2]; n2 = w[3];
02152     /*
02153         if SETTONUM:  x?j[n2]
02154         if FROMSET:   x?j?n2    or x?j and n2 = -WOLDOFFSET.
02155     */
02156     if ( j > WILDOFFSET ) {
02157         j -= 2*WILDOFFSET;
02158         notflag = 1;
02159     /*
02160         ???????
02161     */
02162         AN.oldtype = -1;
02163         AN.oldvalue = -1;
02164     }
02165     if ( j < AM.NumFixedSets ) { /* special set */
02166         rethblock = 1;
02167         switch ( j ) {
02168             case POS_:
02169                 if ( type != SYMTONUM ||
02170                     newnumber <= 0 ) goto NoMnot;
02171                 break;
02172             case POS0_:
02173                 if ( type != SYMTONUM ||
02174                     newnumber < 0 ) goto NoMnot;
02175                 break;
02176             case NEG_:
02177                 if ( type != SYMTONUM ||
02178                     newnumber >= 0 ) goto NoMnot;
02179                 break;
02180             case NEG0_:
02181                 if ( type != SYMTONUM ||
02182                     newnumber > 0 ) goto NoMnot;
02183                 break;
02184             case EVEN_:
02185                 if ( type != SYMTONUM ||
02186                     ( newnumber & 1 ) != 0 ) goto NoMnot;
02187                 break;
02188             case ODD_:
02189                 if ( type != SYMTONUM ||
02190                     ( newnumber & 1 ) == 0 ) goto NoMnot;
02191                 break;
02192             case Z_:
02193                 if ( type != SYMTONUM ) goto NoMnot;
02194                 break;
02195             case SYMBOL_:
02196                 if ( type != SYMTOSYM ) goto NoMnot;
02197                 break;
02198             case FIXED_:
02199                 if ( type != INDTOIND ||
02200                     newnumber >= AM.OffsetIndex ||
02201                     newnumber < 0 ) goto NoMnot;
02202                 break;
02203             case INDEX_:
02204                 if ( type != INDTOIND ||
02205                     newnumber < 0 ) goto NoMnot;
02206                 break;
02207             case Q_:
02208                 if ( type == SYMTONUM ) break;
02209                 if ( type == SYMTOSUB ) {
02210                     WORD *ss, *sstop;
02211                     ss = newval;
02212                     sstop = ss + *ss;
02213                     ss += ARGHEAD;
02214                     if ( ss >= sstop ) break;
02215                     if ( ss + *ss < sstop ) goto NoMnot;
02216                     if ( ABS(sstop[-1]) == ss[0]-1 ) break;
02217                 }
02218                 goto NoMnot;
02219             case DUMMYINDEX_:
02220                 if ( type != INDTOIND ||
02221                     newnumber < AM.IndDum || newnumber >= AM.IndDum+MAXDUMMIES ) goto NoMnot;
02222                 break;
02223             case VECTOR_:
02224                 if ( type != VECTOVEC ) goto NoMnot;
02225                 break;
02226             default:
02227                 goto NoMnot;
02228         }
02229     Mnot:
02230         if ( notflag ) goto NoM;
02231         return(0);
02232     NoMnot:
02233         if ( !notflag ) goto NoM;

```

```

02234         return(0);
02235     }
02236     else if ( Sets[j].type == CRANGE ) {
02237         if ( ( type == SYMTONUM )
02238             || ( type == INDTOIND && ( newnumber > 0
02239                 && newnumber <= AM.OffsetIndex ) ) ) {
02240             if ( Sets[j].first < MAXPOWER ) {
02241                 if ( newnumber >= Sets[j].first ) goto NoMnot;
02242             }
02243             else if ( Sets[j].first < 3*MAXPOWER ) {
02244                 if ( newnumber+2*MAXPOWER > Sets[j].first ) goto NoMnot;
02245             }
02246             if ( Sets[j].last > -MAXPOWER ) {
02247                 if ( newnumber <= Sets[j].last ) goto NoMnot;
02248             }
02249             else if ( Sets[j].last > -3*MAXPOWER ) {
02250                 if ( newnumber-2*MAXPOWER < Sets[j].last ) goto NoMnot;
02251             }
02252             goto Mnot;
02253         }
02254         goto NoMnot;
02255     }
02256     /*
02257     Now we have to determine which set element
02258     */
02259     w = SetElements + Sets[j].first;
02260     m = SetElements + Sets[j].last;
02261     if ( w == m ) {
02262         /*
02263         The set is empty! This is not a match unless we have !{}, in
02264         which case it is.
02265         */
02266         if ( notflag ) return 0;
02267         AN.oldtype = old2;
02268         AN.oldvalue = oldval;
02269         goto NoMatch;
02270     }
02271
02272     if ( ( Sets[j].flags & ORDEREDSET ) == ORDEREDSET ) {
02273         /*
02274         We search first and ask questions later
02275         */
02276         i = BinarySearch(w, Sets[j].last-Sets[j].first, newnumber);
02277         if ( i < 0 ) { /* no matter what, it is not in the set. */
02278             goto NoMnot;
02279         }
02280         else {
02281             /*
02282             We can set the proper parameters now to make only the
02283             checks for the given set element.
02284             After that we jump into the appropriate loop.
02285             */
02286             w = m = SetElements + i;
02287             i++;
02288             if ( Sets[j].type == -1 || Sets[j].type == CNUMBER ) {
02289                 goto insideloop1;
02290             }
02291             else {
02292                 goto insideloop2;
02293             }
02294         }
02295     }
02296     i = 1;
02297     if ( Sets[j].type == -1 || Sets[j].type == CNUMBER ) {
02298         do {
02299             insideloop1:
02300             if ( notflag ) {
02301                 switch ( type ) {
02302                     case SYMTOSYM:
02303                         if ( Sets[j].type == CNUMBER ) {}
02304                         else {
02305                             if ( *w == newnumber ) goto NoMatch;
02306                         }
02307                         break;
02308                     case SYMTONUM:
02309                     case INDTOIND:
02310                         if ( *w == newnumber ) goto NoMatch;
02311                         break;
02312                     default:
02313                         break;
02314                 }
02315             }
02316             else if ( type != SYMTONUM && type != INDTOIND
02317                 && type != SYMTOSYM ) goto NoMatch;
02318             else if ( type == SYMTOSYM && Sets[j].type == CNUMBER ) goto NoMatch;
02319             else if ( *w == newnumber ) {
02320                 if ( *s == SETTONUM ) {

```

```

02321         if ( n2 == oldnumber && type
02322         <= SYMTOSUB ) goto NoMatch;
02323         m = AT.WildMask;
02324         w = AN.WildValue;
02325         n = AN.NumWild;
02326         while ( --n >= 0 ) {
02327             if ( w[2] == n2 && *w <= SYMTOSUB ) {
02328                 if ( !*m ) {
02329                     *w = SYMTONUM;
02330                     w[3] = i;
02331                     AN.WildReserve = 1;
02332                     return(0);
02333                 }
02334                 if ( *w != SYMTONUM )
02335                     goto NoMatch;
02336                 if ( w[3] == i ) return(0);
02337                 i = w[3];
02338                 j = (SetElements + Sets[j].first)[i];
02339                 if ( j == n2 ) return(0);
02340                 goto NoMatch;
02341             }
02342             m++; w += w[1];
02343         }
02344     }
02345     else if ( n2 >= 0 ) {
02346         *newval = *(w - Sets[j].first + Sets[n2].first);
02347         if ( *newval > MAXPOWER ) *newval -= 2*MAXPOWER;
02348         if ( dirty && *newval != oldval ) {
02349             *newval = oldval; goto NoMatch;
02350         }
02351     }
02352     return(0);
02353 }
02354 i++;
02355 } while ( ++w < m );
02356 }
02357 else {
02358     do {
02359         insideloop2:
02360         inset = *w;
02361         if ( notflag ) {
02362             switch ( type ) {
02363                 case SYMTONUM:
02364                 case SYMTOSYM:
02365                     if ( ( type == SYMTOSYM && *w == newnumber )
02366                     || ( type == SYMTONUM && *w-2*MAXPOWER == newnumber ) ) {
02367                         goto NoMatch;
02368                     }
02369                     /* fall through */
02370                 case SYMTOSUB:
02371                     if ( *w < 0 ) {
02372                         WORD *mm = AT.WildMask, *mmm, *part;
02373                         WORD *ww = AN.WildValue;
02374                         WORD nn = AN.NumWild;
02375                         k = -*w;
02376                         while ( --nn >= 0 ) {
02377                             if ( *mm && ww[2] == k && ww[0] == type ) {
02378                                 if ( type != SYMTOSUB ) {
02379                                     if ( ww[3] == newnumber ) goto NoMatch;
02380                                 }
02381                                 else {
02382                                     mmm = C->rhs[ww[3]];
02383                                     nn = *newval-2;
02384                                     part = newval+2;
02385                                     if ( (C->rhs[ww[3]+1]-mmm-1) == nn ) {
02386                                         while ( --nn >= 0 ) {
02387                                             if ( *mmm != *part ) {
02388                                                 mmm++; part++; break;
02389                                             }
02390                                             mmm++; part++;
02391                                         }
02392                                         if ( nn < 0 ) goto NoMatch;
02393                                     }
02394                                 }
02395                                 break;
02396                             }
02397                             mm++; ww += ww[1];
02398                         }
02399                     }
02400                     break;
02401                 case VECTOMIN:
02402                     if ( type == VECTOMIN ) {
02403                         if ( inset >= AM.OffsetVector ) { i++; continue; }
02404                         inset += WILDMASK;
02405                     }
02406                     /* fall through */
02407                 case VECTOVEC:

```

```

02408         if ( inset == newnumber ) goto NoMatch;
02409         /* fall through */
02410     case VECTOSUB:
02411         if ( inset - WILDOFFSET >= AM.OffsetVector ) {
02412             WORD *mm = AT.WildMask, *mmm, *part;
02413             WORD *ww = AN.WildValue;
02414             WORD nn = AN.NumWild;
02415             k = inset - WILDOFFSET;
02416             while ( --nn >= 0 ) {
02417                 if ( *mm && ww[2] == k && ww[0] == type ) {
02418                     if ( type == VECTOVEC ) {
02419                         if ( ww[3] == newnumber ) goto NoMatch;
02420                     }
02421                     else {
02422                         mmm = C->rhs[ww[3]];
02423                         nn = *newval-2;
02424                         part = newval+2;
02425                         if ( (C->rhs[ww[3]+1]-mmm-1) == nn ) {
02426                             while ( --nn >= 0 ) {
02427                                 if ( *mmm != *part ) {
02428                                     mmm++; part++; break;
02429                                 }
02430                                 mmm++; part++;
02431                             }
02432                             if ( nn < 0 ) goto NoMatch;
02433                         }
02434                     }
02435                     break;
02436                 }
02437                 mm++; ww += ww[1];
02438             }
02439         }
02440         break;
02441     case INDTOIND:
02442         if ( *w == newnumber ) goto NoMatch;
02443         /* fall through */
02444     case INTOSUB:
02445         if ( *w - (WORD)WILDMASK >= AM.OffsetIndex ) {
02446             WORD *mm = AT.WildMask, *mmm, *part;
02447             WORD *ww = AN.WildValue;
02448             WORD nn = AN.NumWild;
02449             k = *w - WILDMASK;
02450             while ( --nn >= 0 ) {
02451                 if ( *mm && ww[2] == k && ww[0] == type ) {
02452                     if ( type == INDTOIND ) {
02453                         if ( ww[3] == newnumber ) goto NoMatch;
02454                     }
02455                     else {
02456                         mmm = C->rhs[ww[3]];
02457                         nn = *newval-2;
02458                         part = newval+2;
02459                         if ( (C->rhs[ww[3]+1]-mmm-1) == nn ) {
02460                             while ( --nn >= 0 ) {
02461                                 if ( *mmm != *part ) {
02462                                     mmm++; part++; break;
02463                                 }
02464                                 mmm++; part++;
02465                             }
02466                             if ( nn < 0 ) goto NoMatch;
02467                         }
02468                     }
02469                     break;
02470                 }
02471                 mm++; ww += ww[1];
02472             }
02473         }
02474         break;
02475     case FUNTOFUN:
02476         if ( *w == newnumber ) goto NoMatch;
02477         if ( ( type == FUNTOFUN &&
02478             ( k = *w - WILDMASK ) > FUNCTION ) ) {
02479             WORD *mm = AT.WildMask;
02480             WORD *ww = AN.WildValue;
02481             WORD nn = AN.NumWild;
02482             while ( --nn >= 0 ) {
02483                 if ( *mm && ww[2] == k && ww[0] == type ) {
02484                     if ( ww[3] == newnumber ) goto NoMatch;
02485                     break;
02486                 }
02487                 mm++; ww += ww[1];
02488             }
02489         }
02490     default:
02491         break;
02492 }
02493 }
02494 else {

```



```

02495         if ( type == VECTOMIN ) {
02496             if ( inset >= AM.OffsetVector ) { i++; continue; }
02497             inset += WILDMASK;
02498         }
02499         if ( ( inset == newnumber && type != SYMTONUM ) ||
02500             ( type == SYMTONUM && inset-2*MAXPOWER == newnumber ) ) {
02501             if ( *s == SETTONUM ) {
02502                 if ( n2 == oldnumber && type
02503                     <= SYMTOSUB ) goto NoMatch;
02504                 m = AT.WildMask;
02505                 w = AN.WildValue;
02506                 n = AN.NumWild;
02507                 while ( --n >= 0 ) {
02508                     if ( w[2] == n2 && *w <= SYMTOSUB ) {
02509                         if ( !*m ) {
02510                             *w = SYMTONUM;
02511                             w[3] = i;
02512                             AN.WildReserve = 1;
02513                             return(0);
02514                         }
02515                         if ( *w != SYMTONUM )
02516                             goto NoMatch;
02517                         if ( w[3] == i ) return(0);
02518                         i = w[3];
02519                         j = (SetElements + Sets[j].first)[i];
02520                         if ( j == n2 ) return(0);
02521                         goto NoMatch;
02522                     }
02523                     m++; w += w[1];
02524                 }
02525             }
02526             else if ( n2 >= 0 ) {
02527                 *newval = *(w - Sets[j].first + Sets[n2].first);
02528                 if ( *newval > MAXPOWER ) *newval -= 2*MAXPOWER;
02529                 if ( dirty && *newval != oldval ) {
02530                     *newval = oldval; goto NoMatch;
02531                 }
02532             }
02533             return(0);
02534         }
02535     }
02536     i++;
02537     } while ( ++w < m );
02538 }
02539 if ( notflag ) return(0);
02540 AN.oldtype = old2; AN.oldvalue = oldval; goto NoMatch;
02541 }
02542 else { return(0); }
02543
02544 NoM:
02545     AN.oldtype = old2; AN.oldvalue = w[3]; goto NoMatch;
02546 }
02547
02548 /*
02549     #] CheckWild :
02550     #] Wildcards :
02551     #[ DenToFunction :
02552
02553     Renames the denominator function into a function with the given number.
02554     For the syntax see     Denominators,function;
02555 */
02556
02557 int DenToFunction(WORD *term, WORD numfun)
02558 {
02559     int action = 0;
02560     WORD *t, *tstop, *tnext, *arg, *argstop, *targ;
02561     t = term+1;
02562     tstop = term + *term; tstop -= ABS(tstop[-1]);
02563     while ( t < tstop ) {
02564         if ( *t == DENOMINATOR ) {
02565             *t = numfun; t[2] |= DIRTYFLAG; action = 1;
02566         }
02567         tnext = t + t[1];
02568         if ( *t >= FUNCTION && functions[*t-FUNCTION].spec <= 0 ) {
02569             arg = t + FUNHEAD;
02570             while ( arg < tnext ) {
02571                 if ( *arg > 0 ) {
02572                     targ = arg + ARGHEAD; argstop = arg + *arg;
02573                     while ( targ < argstop ) {
02574                         if ( DenToFunction(targ,numfun) ) {
02575                             arg[1] |= DIRTYFLAG; t[2] |= DIRTYFLAG; action = 1;
02576                         }
02577                         targ += *targ;
02578                     }
02579                     arg = argstop;
02580                 }
02581                 else if ( *arg <= -FUNCTION ) arg++;

```

```
02582         else arg += 2;
02583     }
02584 }
02585 t = tnext;
02586 }
02587 return(action);
02588 }
02589
02590 /*
02591  #] DenToFunction :
02592  */
```

Index

- `_CHECK`
 - `parallel.c`, [2096](#)
 - `__CHECK`
 - `parallel.c`, [2097](#)
 - `~AEdge`
 - `AEdge`, [8](#)
 - `~ANode`
 - `ANode`, [12](#)
 - `~AStack`
 - `AStack`, [27](#)
 - `~Assign`
 - `Assign`, [17](#)
 - `~ECand`
 - `ECand`, [94](#)
 - `~EEdge`
 - `EEdge`, [96](#)
 - `~EGraph`
 - `EGraph`, [104](#)
 - `~ENode`
 - `ENode`, [116](#)
 - `~EStack`
 - `EStack`, [119](#)
 - `~Interaction`
 - `Interaction`, [159](#)
 - `~MCBlock`
 - `MCBlock`, [192](#)
 - `~MCBridge`
 - `MCBridge`, [194](#)
 - `~MCEdge`
 - `MCEdge`, [195](#)
 - `~MCOpi`
 - `MCOpi`, [204](#)
 - `~MConn`
 - `MConn`, [197](#)
 - `~MGraph`
 - `MGraph`, [208](#)
 - `~MNodeClass`
 - `MNodeClass`, [223](#)
 - `~MOrbits`
 - `MOrbits`, [240](#)
 - `~Model`
 - `Model`, [228](#)
 - `~NCand`
 - `NCand`, [269](#)
 - `~NStack`
 - `NStack`, [278](#)
 - `~Options`
 - `Options`, [301](#)
 - `~Output`
 - `Output`, [310](#)
 - `~PNodeClass`
 - `PNodeClass`, [340](#)
 - `~Particle`
 - `Particle`, [328](#)
 - `~Process`
 - `Process`, [369](#)
 - `~SGroup`
 - `SGroup`, [391](#)
 - `~SProcess`
 - `SProcess`, [409](#)
 - `~T_EGraph`
 - `T_EGraph`, [447](#)
 - `~T_MGraph`
 - `T_MGraph`, [452](#)
 - `~T_MNodeClass`
 - `T_MNodeClass`, [458](#)
 - `~fmpz`
 - `flint::fmpz`, [138](#)
 - `~mpoly`
 - `flint::mpoly`, [242](#)
 - `~mpoly_ctx`
 - `flint::mpoly_ctx`, [243](#)
 - `~mpoly_factor`
 - `flint::mpoly_factor`, [244](#)
 - `~poly`
 - `flint::poly`, [343](#)
 - `poly`, [346](#)
 - `~poly_factor`
 - `flint::poly_factor`, [362](#)
- `A`
 - `inivar.h`, [1710](#)
 - `variable.h`, [3239](#)
- `a`
 - `MODNUM`, [237](#)
- `a3`
 - `TrAcEs`, [482](#)
- `a4`
 - `TrAcEs`, [482](#)
- `ABS`
 - `declare.h`, [806](#)
- `ABSFUNCTION`
 - `ftypes.h`, [1410](#)
- `AC`
 - `variable.h`, [3238](#)
- `accu`
 - `TrAcEn`, [476](#)
 - `TrAcEs`, [479](#)
- `AccumGCD`

- declare.h, 830
- reken.c, 2587
- accup
 - TrAcEn, 476
 - TrAcEs, 479
- acode
 - Particle, 330
 - PInput, 338
- ACOSFUNCTION
 - ftypes.h, 1414
- ACOSHFUNCTION
 - ftypes.h, 1415
- active
 - FiLe, 130
 - PF_BUFFER, 336
- activenames
 - C_const, 46
- ad
 - TrAcEs, 481
- add
 - COST, 76
 - Fraction, 140
 - poly, 354
- Add2Com
 - declare.h, 820
- Add2ComStrings
 - compcomm.c, 623
 - declare.h, 933
- ADD2POS
 - declare.h, 818
- Add3Com
 - declare.h, 821
- Add4Com
 - declare.h, 821
- Add5Com
 - declare.h, 821
- add_factor
 - factorized_poly, 126
- ADDARG
 - ftypes.h, 1463
- AddArgs
 - declare.h, 830
 - sort.c, 2756
- AddArrayIndex
 - declare.h, 828
 - sch.c, 2687
- addArtic
 - MConn, 199
- addBlock
 - MConn, 199
- addBlockSelf
 - MConn, 199
- addBridge
 - MConn, 198
- addCEdge
 - MConn, 198
- AddCoef
 - declare.h, 830
- sort.c, 2754
- AddComString
 - compcomm.c, 623
 - declare.h, 962
- AddDictionary
 - declare.h, 1026
 - dict.c, 1085
- AddDollar
 - declare.h, 897
 - names.c, 1864
- AddDubious
 - declare.h, 898
 - names.c, 1865
- addEdge
 - Assign, 18
- AddExpression
 - declare.h, 897
 - names.c, 1865
- addFLine
 - EGraph, 108
- AddFloats
 - float.c, 1302
- AddFunction
 - declare.h, 898
 - names.c, 1862
- addGroup
 - SGroup, 392
- AddIndex
 - declare.h, 898
 - names.c, 1861
- addInteraction
 - Model, 229
- addInteractionEnd
 - Model, 229
- AddLHS
 - comtool.c, 771
 - declare.h, 930
- AddLineFeed
 - declare.h, 808
- AddLong
 - declare.h, 831
 - reken.c, 2588
- AddName
 - declare.h, 894
 - names.c, 1857
- AddNtoC
 - comtool.c, 773
 - declare.h, 932
- AddNtoL
 - comtool.c, 772
 - declare.h, 931
- AddObject
 - declare.h, 992
 - minos.c, 1761
- addOPic
 - MConn, 198
- addParticle
 - Model, 229

- addParticleEnd
 - Model, 229
- AddPLon
 - declare.h, 831
 - reken.c, 2588
- AddPoly
 - declare.h, 831
 - sort.c, 2755
- ADDPOS
 - declare.h, 817
- AddPotModdollar
 - declare.h, 973
 - dollar.c, 1110
- AddRat
 - declare.h, 832
 - reken.c, 2586
- AddRatToFloat
 - float.c, 1302
- AddRHS
 - comtool.c, 771
 - declare.h, 931
- AddSet
 - declare.h, 899
 - names.c, 1863
- AddSymbol
 - declare.h, 897
 - names.c, 1860
- AddTableName
 - declare.h, 992
 - minos.c, 1760
- AddToCB
 - declare.h, 812
- AddToCom
 - compcomm.c, 623
 - declare.h, 933
- AddToDictionary
 - declare.h, 1026
 - dict.c, 1085
- AddToDollarBuffer
 - declare.h, 967
 - dollar.c, 1103
- AddToIndex
 - declare.h, 990
 - minos.c, 1761
- AddToLine
 - declare.h, 833
 - sch.c, 2685
- AddToPreTypes
 - declare.h, 929
 - pre.c, 2362
- AddToScratch
 - declare.h, 1030
 - store.c, 2863
- AddToString
 - declare.h, 922
 - tools.c, 3118
- AddVector
 - declare.h, 898
 - names.c, 1861
- AddWild
 - declare.h, 833
 - wildcard.c, 3255
- AddWildcardName
 - declare.h, 929
 - names.c, 1860
- AddWithFloat
 - float.c, 1309
- adjMat
 - MGraph, 213
 - T_MGraph, 454
- AdjustRenumScratch
 - declare.h, 852
 - reshuf.c, 2643
- aebufnum
 - T_const, 439
- AEdge, 7
 - ~AEdge, 8
 - AEdge, 8
 - cand, 8
 - DUMMYPADDING, 8
 - nlegs, 8
 - nodes, 8
 - ptcl, 8
- aedges
 - ANode, 13
- aelegs
 - ANode, 13
- afterwards
 - Stream, 424
- AGMFUNCTION
 - ftypes.h, 1419
- agraph
 - AStack, 28
 - SProcess, 412
- agrcount
 - Process, 370
 - SProcess, 414
- ald
 - EGraph, 110
- alfatable1
 - compiler.c, 733
- all_variables
 - poly, 350
- ALLARGS
 - ftypes.h, 1461
- allAssigned
 - Assign, 18
- allbufnum
 - T_const, 439
- ALLDIRTY
 - ftypes.h, 1436
- ALLFUNCTIONS
 - ftypes.h, 1420
- ALLFUNPOWERS
 - ftypes.h, 1457
- ALLGLOBALS

- structs.h, [2937](#)
- AllGlobals, [9](#)
 - Cc, [10](#)
 - M, [10](#)
 - N, [10](#)
 - O, [11](#)
 - P, [11](#)
 - R, [10](#)
 - S, [10](#)
 - T, [11](#)
 - X, [11](#)
- ALLINTEGERDOUBLE
 - ftypes.h, [1401](#)
- AllLoops
 - declare.h, [1035](#)
 - lus.c, [1716](#)
- ALLMZVFUNCTIONS
 - ftypes.h, [1420](#)
- AllocFileHandle
 - declare.h, [978](#)
 - setfile.c, [2725](#)
- AllocSetups
 - declare.h, [908](#)
 - setfile.c, [2725](#)
- AllocSort
 - declare.h, [909](#)
 - setfile.c, [2725](#)
- AllocSortFileName
 - declare.h, [909](#)
 - setfile.c, [2725](#)
- AllOnePI
 - lus.c, [1717](#)
- AllowDelay
 - P_const, [320](#)
- allPart
 - Model, [232](#)
- allParticles
 - Model, [230](#)
- AllPaths
 - declare.h, [1036](#)
 - lus.c, [1717](#)
- allsign
 - TrAcEn, [477](#)
 - TrAcEs, [483](#)
- ALLVARIABLES
 - ftypes.h, [1391](#)
- ALSODOLLARS
 - ftypes.h, [1460](#)
- ALSOFUNARGS
 - ftypes.h, [1459](#)
- ALSOPOWERS
 - ftypes.h, [1459](#)
- ALSOREVERSE
 - ftypes.h, [1402](#)
- AltCollectFun
 - C_const, [66](#)
- ALTSEPARATOR
 - fwin.h, [1514](#)
- unix.h, [3225](#)
- AM
 - variable.h, [3238](#)
- AN
 - variable.h, [3238](#)
- aname
 - Particle, [329](#)
 - PInput, [338](#)
- ANDCOND
 - ftypes.h, [1453](#)
- ANNOUNCE
 - checkpoint.c, [547](#)
- ANode, [11](#)
 - ~ANode, [12](#)
 - aedges, [13](#)
 - aelegs, [13](#)
 - ANode, [12](#)
 - anodes, [13](#)
 - cand, [13](#)
 - deg, [13](#)
 - newleg, [12](#)
 - nlegs, [13](#)
- anodes
 - ANode, [13](#)
- antiParticle
 - Model, [230](#)
- ANTISYMMETRIC
 - ftypes.h, [1448](#)
- ANYTYPE
 - ftypes.h, [1392](#)
- AO
 - variable.h, [3238](#)
- AP
 - variable.h, [3238](#)
- aparticle
 - Particle, [328](#)
- Apply
 - declare.h, [844](#)
 - tables.c, [2997](#)
- ApplyExec
 - declare.h, [844](#)
 - tables.c, [2997](#)
- ApplyReset
 - declare.h, [844](#)
 - tables.c, [2997](#)
- AR
 - variable.h, [3238](#)
- AreArgsEqual
 - declare.h, [906](#)
 - tools.c, [3123](#)
- arg1
 - optimization, [293](#)
- arg2
 - optimization, [294](#)
- argaddress
 - N_const, [249](#)
- argag
 - Options, [306](#)

- ARGBUFFER, 14
 - buffer, 14
 - dollar, 14
 - dummy, 15
 - size, 14
 - type, 15
- ArgDotproductMerge
 - argument.c, 498
 - declare.h, 937
- argemg
 - Options, 306
- ArgFactorize
 - argument.c, 497
 - declare.h, 934
- ARGFIELD
 - ftypes.h, 1406
- ARGHEAD
 - ftypes.h, 1436
- arglevel
 - C_const, 65
- arglist
 - N_const, 254
- arglistsize
 - N_const, 257
- argmg
 - Options, 306
- argnames
 - pReVaR, 365
- ARRANGE
 - ftypes.h, 1461
- args
 - PaRtl, 326
- argsize
 - NeStInG, 272
- argstack
 - C_const, 52
- argsumcheck
 - C_const, 64
- ArgSymbolMerge
 - argument.c, 498
 - declare.h, 937
- argtail
 - TaBIEs, 466
- ARGTOARG
 - ftypes.h, 1434
- argument.c, 495, 501
 - ArgDotproductMerge, 498
 - ArgFactorize, 497
 - ArgSymbolMerge, 498
 - ArgumentExplode, 496
 - ArgumentImplode, 496
 - CleanupArgCache, 497
 - execarg, 496
 - execterm, 496
 - FindArg, 497
 - InsertArg, 497
 - MakeInteger, 499
 - MakeMod, 499
 - NEWORDER, 496
 - SortWeights, 500
 - TakeArgContent, 498
- argument_to_poly
 - poly, 352
- ArgumentExplode
 - argument.c, 496
 - declare.h, 987
- ArgumentImplode
 - argument.c, 496
 - declare.h, 987
- ARGWILD
 - ftypes.h, 1405
- ARLTOARL
 - ftypes.h, 1434
- arraysize
 - POLYMOD, 363
- articals
 - MConn, 200
- AS
 - variable.h, 3239
- ASINFUNCTION
 - ftypes.h, 1414
- ASINHFUNCTION
 - ftypes.h, 1415
- Assign, 15
 - ~Assign, 17
 - addEdge, 18
 - allAssigned, 18
 - Assign, 17
 - assignAllVertices, 17
 - assignIVertex, 20
 - assignPLeg, 21
 - assignVertex, 18
 - astack, 24
 - candPart, 20
 - candPartClassify, 21
 - checkAG, 17
 - checkCand, 23
 - checkNode, 23
 - checkOrderCpl, 21
 - checkpoint0, 26
 - cmpNodes, 22
 - cmpPermGraph, 22
 - connect, 19
 - cplleft, 26
 - detEdge, 21
 - edges, 26
 - edgeSym, 22
 - egraph, 23
 - fillEGraph, 19
 - fromMGraph, 18
 - getLegParticle, 19
 - isIsomorphic, 22
 - isOrdLegs, 22
 - isOrdPLeg, 21
 - legEdgeParticle, 19
 - legPart, 20

- mgraph, [23](#)
- model, [24](#)
- nAGraphs, [25](#)
- nAOPI, [25](#)
- nEdges, [25](#)
- nETotal, [25](#)
- nExtern, [25](#)
- nNodes, [24](#)
- nodes, [25](#)
- opt, [24](#)
- orbits, [24](#)
- pnclass, [24](#)
- prCand, [17](#)
- proc, [24](#)
- reordLeg, [19](#)
- restoreCouple, [23](#)
- saveCouple, [22](#)
- selectLeg, [18](#)
- selectVertex, [18](#)
- selectVertexSimp, [18](#)
- selUnAssLeg, [20](#)
- selUnAssVertex, [20](#)
- selUnAssVertexSimp, [20](#)
- sproc, [24](#)
- subCouple, [23](#)
- updateCandNode, [21](#)
- wAGraphs, [25](#)
- wAOPI, [25](#)
- assign
 - SProcess, [410](#)
- assignAllVertices
 - Assign, [17](#)
- AssignDollar
 - declare.h, [967](#)
 - dollar.c, [1102](#)
- assigned
 - EGraph, [110](#)
- assignIVertex
 - Assign, [20](#)
- assignPLeg
 - Assign, [21](#)
- assignVertex
 - Assign, [18](#)
- AStack, [26](#)
 - ~AStack, [27](#)
 - agraph, [28](#)
 - AStack, [27](#)
 - checkPoint, [27](#)
 - eSize, [29](#)
 - eStack, [29](#)
 - eStackP, [29](#)
 - nSize, [29](#)
 - nStack, [28](#)
 - nStackP, [29](#)
 - prStack, [28](#)
 - pushEdge, [28](#)
 - pushNode, [28](#)
 - restore, [28](#)
 - restoreMsg, [28](#)
 - setAGraph, [27](#)
- astack
 - Assign, [24](#)
 - Process, [372](#)
 - SProcess, [411](#)
- AT
 - variable.h, [3239](#)
- ATAN2FUNCTION
 - ftypes.h, [1414](#)
- ATANFUNCTION
 - ftypes.h, [1414](#)
- ATANHFUNCTION
 - ftypes.h, [1415](#)
- ATENDOFMODULE
 - ftypes.h, [1390](#)
- atstartup
 - M_const, [189](#)
- AutoDeclareFlag
 - C_const, [54](#)
- AutoFunctionList
 - C_const, [45](#)
- autofunctions
 - variable.h, [3236](#)
- AutoIndexList
 - C_const, [45](#)
- autoindices
 - variable.h, [3237](#)
- AUTONAMES
 - ftypes.h, [1460](#)
- autonames
 - C_const, [46](#)
- AutoSymbolList
 - C_const, [45](#)
- autosymbols
 - variable.h, [3237](#)
- AutoVectorList
 - C_const, [45](#)
- autovectors
 - variable.h, [3237](#)
- auxr1
 - evaluate.c, [1157](#)
- auxr2
 - evaluate.c, [1157](#)
- auxr3
 - evaluate.c, [1157](#)
- auxr4
 - evaluate.c, [1157](#)
- auxr5
 - evaluate.c, [1157](#)
- AWORDMASK
 - form3.h, [1346](#)
- AX
 - variable.h, [3239](#)
- BACKINOUT
 - declare.h, [812](#)
- balance
 - NaMeNode, [264](#)

- Balancing
 - S_const, [387](#)
- BASECODE
 - ftypes.h, [1464](#)
- BASEPOSITION
 - declare.h, [818](#)
- bconn
 - EGraph, [113](#)
- begin
 - Options, [304](#)
- beginProc
 - Options, [304](#)
- beginSubProc
 - Options, [304](#)
- Bernoulli
 - declare.h, [849](#)
 - reken.c, [2595](#)
- BERNOULLIFUNCTION
 - ftypes.h, [1411](#)
- bernoullis
 - T_const, [435](#)
- BETAVERSION
 - form3.h, [1343](#)
- BHEAD
 - structs.h, [2932](#)
- BHEAD0
 - structs.h, [2933](#)
- bicol
 - MGraph, [217](#)
- biconnE
 - EGraph, [106](#)
- biconnME
 - MGraph, [210](#)
- bicount
 - EGraph, [114](#)
 - MGraph, [217](#)
- bidef
 - EGraph, [113](#)
 - MGraph, [217](#)
- BigLong
 - declare.h, [833](#)
 - reken.c, [2588](#)
- biinitE
 - EGraph, [106](#)
- bilow
 - EGraph, [113](#)
 - MGraph, [217](#)
- BinarySearch
 - declare.h, [979](#)
 - sort.c, [2763](#)
- BinomGen
 - declare.h, [833](#)
 - ratio.c, [2535](#)
- BINOMIAL
 - ftypes.h, [1409](#)
- BIPART
 - ftypes.h, [1473](#)
- bipart
 - MGraph, [216](#)
- bisearchE
 - EGraph, [107](#)
- bisearchME
 - MGraph, [210](#)
- bit_0
 - bit_field, [30](#)
- bit_1
 - bit_field, [30](#)
- bit_2
 - bit_field, [30](#)
- bit_3
 - bit_field, [30](#)
- bit_4
 - bit_field, [30](#)
- bit_5
 - bit_field, [31](#)
- bit_6
 - bit_field, [31](#)
- bit_7
 - bit_field, [31](#)
- bit_field, [29](#)
 - bit_0, [30](#)
 - bit_1, [30](#)
 - bit_2, [30](#)
 - bit_3, [30](#)
 - bit_4, [30](#)
 - bit_5, [31](#)
 - bit_6, [31](#)
 - bit_7, [31](#)
- BITSINLONG
 - form3.h, [1345](#)
- BITSINWORD
 - form3.h, [1344](#)
- blksp
 - MConn, [200](#)
- blkstk
 - MConn, [201](#)
- blkstkptr
 - MConn, [203](#)
- blnce
 - tree, [484](#)
- BLOCK
 - ftypes.h, [1418](#)
- block
 - MGraph, [216](#)
- blocks
 - MConn, [200](#)
- BlockSpaces
 - O_const, [285](#)
- BOOL
 - form3.h, [1351](#)
- boomlijst
 - CbUf, [73](#)
 - TabIEs, [466](#)
- BottomLevel
 - C_const, [56](#)
- bounds

- TabIEs, [468](#)
- BrackBuf
 - T_const, [434](#)
- bracket
 - BrAcKeTiNdEx, [32](#)
 - O_const, [282](#)
- bracketbuffer
 - BrAcKeTiNfO, [35](#)
- bracketbuffersize
 - BrAcKeTiNfO, [36](#)
- BRACKETCURRENTEXPR
 - execute.c, [1170](#)
- BracketFactors
 - M_const, [191](#)
- bracketfill
 - BrAcKeTiNfO, [36](#)
- BrAcKeTiNdEx, [31](#)
 - bracket, [32](#)
 - next, [32](#)
 - start, [32](#)
 - termsinbracket, [32](#)
- bracketindexflag
 - C_const, [59](#)
 - T_const, [440](#)
- BrAcKeTiNfO, [35](#)
 - bracketbuffer, [35](#)
 - bracketbuffersize, [36](#)
 - bracketfill, [36](#)
 - indexbuffer, [35](#)
 - indexbuffersize, [36](#)
 - indexfill, [36](#)
 - SortType, [36](#)
- BracketInfo, [33](#)
 - BracketInfo, [33](#)
 - dummy, [34](#)
 - num_terms, [34](#)
 - operator<, [34](#)
 - p, [34](#)
 - pattern, [34](#)
- bracketinfo
 - ExPrEsSiOn, [122](#)
 - T_const, [437](#)
- BracketNormalize
 - C_const, [59](#)
 - declare.h, [863](#)
 - normal.c, [1907](#)
- BracketOn
 - R_const, [379](#)
- BRACKETOTHEREXPR
 - execute.c, [1170](#)
- bridges
 - MConn, [200](#)
- buff
 - PF_BUFFER, [334](#)
- Buffer
 - CbUf, [71](#)
- buffer
 - ARGBUFFER, [14](#)
 - INSIDEINFO, [157](#)
 - longMultiStruct, [166](#)
 - PRELOAD, [364](#)
 - StOrEcAcHe, [417](#)
 - StreaM, [422](#)
- bufferedInd
 - O_const, [288](#)
- BufferForOutput
 - inivar.h, [1711](#)
- buffernum
 - SuBbUf, [425](#)
- bufferposition
 - StreaM, [423](#)
- buffers
 - TabIEs, [467](#)
- buffersfill
 - TabIEs, [470](#)
- BufferSize
 - CbUf, [73](#)
- buffersize
 - StreaM, [423](#)
- bufferssize
 - TabIEs, [469](#)
- bufIPstruct, [37](#)
 - e, [37](#)
 - i, [37](#)
- bufnum
 - TabIEs, [469](#)
- bufpos
 - longMultiStruct, [166](#)
- BUG
 - variable.h, [3238](#)
- bugtool.c, [541](#), [542](#)
 - ExprStatus, [542](#)
- build_Horner_tree
 - optimize.cc, [2025](#)
- buildTree
 - optimize.cc, [2029](#)
- BUILTINDOLLARS
 - ftypes.h, [1422](#)
- BUILTININDICES
 - ftypes.h, [1422](#)
- BUILTINSYMBOLS
 - ftypes.h, [1422](#)
- BUILTINVECTORS
 - ftypes.h, [1422](#)
- bzero
 - form3.h, [1349](#)
- c1PI
 - MGraph, [214](#)
 - T_MGraph, [454](#)
- c1PINoTadBlock
 - MGraph, [214](#)
- C_const, [38](#)
 - activenames, [46](#)
 - AltCollectFun, [66](#)
 - arglevel, [65](#)
 - argstack, [52](#)

argsumcheck, 64
AutoDeclareFlag, 54
AutoFunctionList, 45
AutoIndexList, 45
autonames, 46
AutoSymbolList, 45
AutoVectorList, 45
BottomLevel, 56
bracketindexflag, 59
BracketNormalize, 59
cbufList, 45
cbufnum, 54
ChannelList, 43
CheckpointFlag, 63
CheckpointInterval, 54
CheckpointRunAfter, 52
CheckpointRunBefore, 52
CheckpointStamp, 53
cmod, 47
CModule, 53
Cnumpows, 67
CodesFlag, 58
CollectFun, 66
CollectPercentage, 69
ComDefer, 66
Commercial, 70
CommutelnSet, 52
CompileLevel, 57
compiletype, 54
CurrentStream, 47
debugFlags, 70
DidClean, 67
DirtPow, 66
dollarnames, 42
dolooplevel, 62
doloopnest, 51
doloopstack, 51
doloopstacksize, 62
DubiousList, 43
DumNum, 65
dumnumflag, 59
endoftokens, 50
ExpressionList, 43
exprfillwarning, 60
exprnames, 43
extrasym, 51
extrasymbols, 69
ffbufnum, 61
FinalStats, 58
firstconstindex, 54
firstctypemessage, 56
FixIndices, 49
FlintPolyFlag, 62
Fortran90Kind, 51
FunctionList, 43
Functions, 46
funpowers, 57
halfmod, 48
HideLevel, 68
HumanStatsFlag, 62
iBuffer, 49
iBufferSize, 53
idoption, 56
IfCount, 48
IfHeap, 48
IfLevel, 67
IfStack, 49
IfSumCheck, 52
IndexList, 44
Indices, 46
inexprlevel, 65
inexprstack, 53
inexprsumcheck, 64
InnerTest, 64
inparallelf, 60
insidefirst, 55
insidelevel, 65
insidestack, 52
insidesumcheck, 64
iPointer, 49
IsFortran90, 61
iStop, 49
LabelNames, 49
Labels, 50
IDefDim, 55
IDefDim4, 55
lhdollarflag, 61
LineLength, 68
LogHandle, 68
IPolyFun, 68
IPolyFunExp, 69
IPolyFunInv, 68
IPolyFunPow, 69
IPolyFunType, 69
IPolyFunVar, 69
ISortType, 58
IUniTrace, 64
IUnitTrace, 66
MaxIf, 56
MaxLabels, 55
MaxNumStreams, 56
MaxSwitch, 68
maxtermlevel, 59
MemDebugFlag, 61
minsidefirst, 55
ModelLevel, 63
models, 47
modelspace, 63
modinverses, 51
modmode, 66
ModOptDollList, 45
modpowers, 48
mparallelf, 60
mProcessBucketSize, 53
MultiBracketBuf, 51
MultiBracketLevels, 61

- MustTestTable, [65](#)
- NamesFlag, [57](#)
- ncmod, [65](#)
- nhalfmod, [66](#)
- NoCompress, [61](#)
- NoShowInput, [54](#)
- npowmod, [65](#)
- NumLabels, [55](#)
- nummodels, [63](#)
- NumStreams, [56](#)
- NumWildcardNames, [55](#)
- NwildC, [66](#)
- OldFactArgFlag, [61](#)
- OldGCDflag, [62](#)
- OldParallelStats, [58](#)
- origin, [63](#)
- OutNumberType, [67](#)
- OutputMode, [67](#)
- OutputSpaces, [67](#)
- outsidefun, [57](#)
- parallelflag, [59](#)
- partodoflag, [60](#)
- PolyRatFunChanged, [69](#)
- PotModDolList, [44](#)
- powmod, [48](#)
- PrintBacktraceFlag, [62](#)
- ProcessBucketSize, [53](#)
- ProcessStats, [59](#)
- properorderflag, [60](#)
- ProtoType, [48](#)
- RepLevel, [64](#)
- RepSumCheck, [64](#)
- separators, [42](#)
- SetElementList, [44](#)
- SetList, [44](#)
- SetupFlag, [58](#)
- ShortStats, [54](#)
- ShortStatsMax, [64](#)
- SizeCommutelnSet, [63](#)
- SortReallocateFlag, [62](#)
- SortType, [58](#)
- StatsFlag, [57](#)
- StoreFileSize, [42](#)
- StoreHandle, [68](#)
- Streams, [46](#)
- SwitchArray, [47](#)
- SwitchHeap, [47](#)
- SwitchInArray, [68](#)
- SwitchLevel, [67](#)
- SymbolList, [44](#)
- Symbols, [46](#)
- SymChangeFlag, [69](#)
- TableBaseList, [45](#)
- tablecheck, [56](#)
- tablefilling, [60](#)
- termlevel, [65](#)
- termstystack, [47](#)
- termstack, [47](#)
- termsumcheck, [50](#)
- TestValue, [52](#)
- ThreadBalancing, [59](#)
- ThreadBucketSize, [53](#)
- ThreadsFlag, [58](#)
- ThreadSortFileSynch, [59](#)
- ThreadStats, [58](#)
- ToBeInFactors, [70](#)
- tokenarglevel, [51](#)
- tokens, [50](#)
- TokensWriteFlag, [57](#)
- topolynomialflag, [61](#)
- toptokens, [50](#)
- TransEname, [53](#)
- UnsureDollarMode, [57](#)
- varnames, [43](#)
- vectorlikeLHS, [63](#)
- VectorList, [44](#)
- Vectors, [46](#)
- vetofilling, [60](#)
- vetotablebasefill, [60](#)
- WarnFlag, [57](#)
- WhileLevel, [67](#)
- WildC, [48](#)
- WildcardBufferSize, [56](#)
- WildcardNames, [50](#)
- wildflag, [55](#)
- WTimeStatsFlag, [62](#)
- cache_buffer
 - checkpoint.c, [551](#)
- cache_fill
 - checkpoint.c, [551](#)
- CACHE_SIZE
 - checkpoint.c, [544](#)
- CACHED_SNAPSHOT
 - checkpoint.c, [544](#)
- CacheNumberFree
 - declare.h, [823](#)
- CacheNumberMalloc
 - declare.h, [822](#)
- CacheNumberMallocAddMemory
 - declare.h, [1005](#)
 - tools.c, [3121](#)
- CacheNumberMemHeap
 - T_const, [437](#)
- CacheNumberMemMax
 - T_const, [440](#)
- CacheNumberMemTop
 - T_const, [440](#)
- calcHash
 - node, [274](#)
- CalculateEuler
 - float.c, [1305](#)
- CalculateMZV
 - float.c, [1305](#)
- CalculateMZVhalf
 - float.c, [1304](#)
- CanCommu

- CbUf, [72](#)
- cand
 - AEdge, [8](#)
 - ANode, [13](#)
- candPart
 - Assign, [20](#)
- candPartClassify
 - Assign, [21](#)
- CARRIAGEReturn
 - fwin.h, [1514](#)
 - unix.h, [3224](#)
- caseoffset
 - SWITCH, [427](#)
- CatchDollar
 - declare.h, [967](#)
 - dollar.c, [1102](#)
- CBUF
 - structs.h, [2936](#)
- CbUf, [70](#)
 - boomlijst, [73](#)
 - Buffer, [71](#)
 - BufferSize, [73](#)
 - CanCommu, [72](#)
 - dimension, [73](#)
 - lhs, [72](#)
 - maxlhs, [73](#)
 - maxrhs, [74](#)
 - MaxTreeSize, [74](#)
 - mnumlhs, [74](#)
 - mnumrhs, [74](#)
 - numdum, [72](#)
 - numlhs, [73](#)
 - numrhs, [73](#)
 - NumTerms, [72](#)
 - numtree, [74](#)
 - Pointer, [71](#)
 - rhs, [72](#)
 - rootnum, [74](#)
 - Top, [71](#)
- cbuf
 - variable.h, [3235](#)
- cBuffer
 - sOrT, [400](#)
- cBufferSize
 - sOrT, [404](#)
- cbufList
 - C_const, [45](#)
- cbufnum
 - C_const, [54](#)
- Cc
 - AllGlobals, [10](#)
- cComChar
 - P_const, [322](#)
- cdeg
 - PGInput, [337](#)
- CDELETE
 - ftypes.h, [1392](#)
- CDELTA
 - ftypes.h, [1393](#)
- cDiag
 - MGraph, [214](#)
- CDOLLAR
 - ftypes.h, [1393](#)
- CDOTPRODUCT
 - ftypes.h, [1393](#)
- CDOUBLEDOT
 - ftypes.h, [1394](#)
- CDUBIOUS
 - ftypes.h, [1393](#)
- cedges
 - MConn, [200](#)
- CEXPRESSION
 - ftypes.h, [1393](#)
- CFD
 - minos.c, [1757](#)
- CFUN
 - ftypes.h, [1474](#)
- CFUNCTION
 - ftypes.h, [1392](#)
- cgen
 - SGroup, [394](#)
- ChainIn
 - declare.h, [987](#)
 - function.c, [1490](#)
- ChainOut
 - declare.h, [987](#)
 - function.c, [1490](#)
- CHANNEL
 - structs.h, [2936](#)
- ChAnNeL, [75](#)
 - handle, [75](#)
 - name, [75](#)
- ChannelList
 - C_const, [43](#)
- channels
 - variable.h, [3235](#)
- characters
 - DICTIONARY, [83](#)
- CharOut
 - declare.h, [910](#)
 - pre.c, [2350](#)
- chartype
 - variable.h, [3232](#)
- CHECK
 - parallel.c, [2096](#)
- check_memory
 - poly, [348](#)
- checkAG
 - Assign, [17](#)
- checkCand
 - Assign, [23](#)
- CHECKEXTERN
 - ftypes.h, [1472](#)
- CheckFloat
 - float.c, [1307](#)
- CHECKLOGTYPE

- ftypes.h, 1404
- checkNode
 - Assign, 23
- checkOrderCpl
 - Assign, 21
- checkPoint
 - AStack, 27
- checkpoint.c, 543, 551
 - ANNOUNCE, 547
 - cache_buffer, 551
 - cache_fill, 551
 - CACHE_SIZE, 544
 - CACHED_SNAPSHOT, 544
 - CheckRecoveryFile, 548
 - DeleteRecoveryFile, 548
 - DoCheckpoint, 550
 - DoRecovery, 549
 - flush_cache, 549
 - fwrite_cached, 549
 - InitRecovery, 548
 - R_COPY_B, 545
 - R_COPY_LIST, 546
 - R_COPY_NAMETREE, 547
 - R_COPY_S, 546
 - R_FREE, 544
 - R_FREE_NAMETREE, 545
 - R_FREE_STREAM, 545
 - R_SET, 545
 - RecoveryFilename, 548
 - S_FLUSH_B, 546
 - S_WRITE_B, 545
 - S_WRITE_DOLLAR, 547
 - S_WRITE_LIST, 546
 - S_WRITE_NAMETREE, 547
 - S_WRITE_S, 546
- checkpoint0
 - Assign, 26
- CheckpointFlag
 - C_const, 63
- CheckpointInterval
 - C_const, 54
- CheckpointRunAfter
 - C_const, 52
- CheckpointRunBefore
 - C_const, 52
- CheckpointStamp
 - C_const, 53
- CHECKPOLY
 - token.c, 3080
- CheckPower
 - O_const, 284
- CheckRecoveryFile
 - checkpoint.c, 548
 - declare.h, 1002
- CheckTableDeclarations
 - declare.h, 843
 - tables.c, 2995
- CheckWild
 - declare.h, 833
 - wildcard.c, 3255
- childs
 - tree_node, 486
- CHISHOLM
 - ftypes.h, 1402
- Chisholm
 - declare.h, 834
 - opera.c, 1990
- chkMomConsv
 - EGraph, 108
- chkOrd
 - T_MNodeClass, 460
- Chop
 - float.c, 1309
- CINDEX
 - ftypes.h, 1392
- cl2mcl
 - PNodeClass, 342
- cl2nd
 - PNodeClass, 342
 - SProcess, 412
- clCmp
 - MNodeClass, 223
 - T_MNodeClass, 459
- cldeg
 - NCInput, 271
 - ToPoTyPe, 474
- CleanDollarFactors
 - declare.h, 971
 - dollar.c, 1108
- CleanExpr
 - declare.h, 834
 - execute.c, 1170
- CLEANFLAG
 - ftypes.h, 1435
- CleanUp
 - declare.h, 834
 - startup.c, 2833
- cleanup
 - flintinterface.h, 1284
- cleanup_master
 - flintinterface.h, 1284
- CleanupArgCache
 - argument.c, 497
 - declare.h, 936
- CleanUpSort
 - declare.h, 978
 - sort.c, 2763
- CleanupTerm
 - declare.h, 982
 - execute.c, 1172
- CLEAR
 - ftypes.h, 1454
- ClearBracketIndex
 - declare.h, 985
 - index.c, 1701
- clearcbuf

- comtool.c, [770](#)
- declare.h, [977](#)
- ClearfFloat
 - evaluate.c, [1159](#)
- clearGroup
 - SGroup, [392](#)
- ClearMacro
 - declare.h, [912](#)
 - pre.c, [2353](#)
- CLEARMODULE
 - ftypes.h, [1384](#)
- ClearMZVTables
 - float.c, [1307](#)
- clearnamefill
 - NaMeTree, [268](#)
- clearnodefill
 - NaMeTree, [268](#)
- ClearOptimize
 - declare.h, [975](#)
 - optimize.cc, [2038](#)
- ClearPushback
 - declare.h, [909](#)
 - pre.c, [2349](#)
- ClearSpectators
 - declare.h, [1029](#)
 - spectator.c, [2821](#)
- ClearStore
 - M_const, [191](#)
- ClearTableTree
 - declare.h, [976](#)
 - tables.c, [2993](#)
- ClearTree
 - comtool.c, [774](#)
 - declare.h, [967](#)
- ClearWild
 - declare.h, [834](#)
 - wildcard.c, [3255](#)
- ClearWildcardNames
 - declare.h, [929](#)
 - names.c, [1860](#)
- clext
 - ToPoTyPe, [474](#)
- clist
 - Interaction, [160](#)
 - MGraph, [212](#)
 - MNodeClass, [225](#)
 - Process, [371](#)
 - SProcess, [413](#)
 - T_MGraph, [453](#)
 - T_MNodeClass, [460](#)
- clmat
 - MNodeClass, [225](#)
 - T_MNodeClass, [461](#)
- clnum
 - NCInput, [271](#)
 - ToPoTyPe, [474](#)
- clord
 - MNodeClass, [225](#)
- closeAllExternalChannels
 - declare.h, [995](#)
 - extcmd.c, [1207](#)
- CloseChannel
 - declare.h, [903](#)
 - tools.c, [3116](#)
- closeExternalChannel
 - declare.h, [995](#)
 - extcmd.c, [1206](#)
- CloseFile
 - declare.h, [900](#)
 - tools.c, [3113](#)
- CloseStream
 - declare.h, [893](#)
 - tools.c, [3112](#)
- class
 - MNode, [221](#)
 - T_MNode, [457](#)
- cltyp
 - NCInput, [271](#)
- cmaxd
 - NCInput, [271](#)
 - ToPoTyPe, [474](#)
- cmaxdeg
 - MNode, [221](#)
 - MNodeClass, [225](#)
 - Particle, [330](#)
 - PNodeClass, [341](#)
- cmind
 - NCInput, [271](#)
 - ToPoTyPe, [474](#)
- cminddeg
 - MNode, [221](#)
 - MNodeClass, [225](#)
 - Particle, [330](#)
 - PNodeClass, [341](#)
- cmmod
 - C_const, [47](#)
 - N_const, [254](#)
- CMODE
 - ftypes.h, [1400](#)
- CMODEL
 - ftypes.h, [1394](#)
- CModule
 - C_const, [53](#)
- cmp
 - node, [274](#)
- CmpArray
 - declare.h, [907](#)
 - tools.c, [3117](#)
- cmpArray
 - T_MNodeClass, [460](#)
- cmpMNCArray
 - MNodeClass, [224](#)
- cmpMom
 - EGraph, [107](#)
- cmpNodes
 - Assign, [22](#)

- cmpPermGraph
 - Assign, [22](#)
- cname
 - OptQGDef, [308](#)
- cnamlist
 - MInput, [219](#)
- cnlist
 - Model, [232](#)
- cNoTadBlock
 - MGraph, [214](#)
- cNoTadpole
 - MGraph, [214](#)
- cnum
 - PGInput, [337](#)
- CNUMBER
 - ftypes.h, [1393](#)
- Cnumlhs
 - R_const, [378](#)
- Cnumpows
 - C_const, [67](#)
- CoAntiBracket
 - compcomm.c, [630](#)
 - declare.h, [938](#)
- CoAntiPutInside
 - compcomm.c, [637](#)
 - declare.h, [941](#)
- CoAntiSymmetrize
 - compcomm.c, [626](#)
 - declare.h, [939](#)
- CoApply
 - declare.h, [942](#)
 - tables.c, [2996](#)
- CoArgExplode
 - compcomm.c, [633](#)
 - declare.h, [939](#)
- CoArgImplode
 - compcomm.c, [633](#)
 - declare.h, [939](#)
- CoArgToExtraSymbol
 - compcomm.c, [634](#)
 - declare.h, [1012](#)
- CoArgument
 - compcomm.c, [624](#)
 - declare.h, [939](#)
- CoAssign
 - comexpr.c, [591](#)
 - declare.h, [965](#)
- CoAuto
 - declare.h, [959](#)
 - names.c, [1864](#)
- CoBracket
 - compcomm.c, [630](#)
 - declare.h, [940](#)
- CoBreak
 - compcomm.c, [637](#)
 - declare.h, [959](#)
- CoCanonicalize
 - declare.h, [840](#)
- diagrams.c, [1057](#)
- CoCase
 - compcomm.c, [637](#)
 - declare.h, [959](#)
- CoCFunction
 - declare.h, [941](#)
 - names.c, [1862](#)
- CoChainin
 - compcomm.c, [628](#)
 - declare.h, [958](#)
- CoChainout
 - compcomm.c, [628](#)
 - declare.h, [958](#)
- CoChisholm
 - compcomm.c, [627](#)
 - declare.h, [958](#)
- CoChop
 - float.c, [1308](#)
- CoClearTable
 - compcomm.c, [634](#)
 - declare.h, [958](#)
- CoClearUserFlag
 - compcomm.c, [638](#)
 - declare.h, [1034](#)
- CoCollect
 - compcomm.c, [618](#)
 - declare.h, [941](#)
- CoCommutelnSet
 - declare.h, [899](#)
 - names.c, [1862](#)
- CoCompress
 - compcomm.c, [618](#)
 - declare.h, [941](#)
- CoContract
 - compcomm.c, [623](#)
 - declare.h, [941](#)
- CoCopySpectator
 - declare.h, [1029](#)
 - spectator.c, [2821](#)
- CoCreateAll
 - compcomm.c, [638](#)
 - declare.h, [1035](#)
- CoCreateAllLoops
 - compcomm.c, [638](#)
 - declare.h, [1034](#)
- CoCreateAllPaths
 - compcomm.c, [638](#)
 - declare.h, [1034](#)
- CoCreateSpectator
 - declare.h, [1028](#)
 - spectator.c, [2820](#)
- CoCTable
 - declare.h, [957](#)
 - names.c, [1863](#)
- CoCTensor
 - declare.h, [941](#)
 - names.c, [1863](#)
- CoCycleSymmetrize

- compcomm.c, 626
- declare.h, 942
- code
 - OPTIMIZERESULT, 298
- CoDeallocateTable
 - comexpr.c, 591
 - declare.h, 971
- CodeFactors
 - compiler.c, 732
 - declare.h, 966
- CoDefault
 - compcomm.c, 637
 - declare.h, 960
- CodeGenerator
 - compiler.c, 732
 - declare.h, 965
- CoDelete
 - compcomm.c, 619
 - declare.h, 942
- CoDenominators
 - compcomm.c, 634
 - declare.h, 942
- CodesFlag
 - C_const, 58
- codesize
 - OPTIMIZERESULT, 298
- CodeToLine
 - declare.h, 828
 - sch.c, 2686
- CoDimension
 - declare.h, 942
 - names.c, 1861
- CoDiscard
 - compcomm.c, 623
 - declare.h, 942
- CoDisorder
 - comexpr.c, 589
 - declare.h, 943
- CoDo
 - compcomm.c, 635
 - declare.h, 1012
- CoDrop
 - compcomm.c, 621
 - declare.h, 943
- CoDropCoefficient
 - compcomm.c, 634
 - declare.h, 943
- CoDropSymbols
 - compcomm.c, 634
 - declare.h, 943
- coeff
 - optimization, 294
- COEFFI
 - ftypes.h, 1451
- coefficient
 - poly, 351
- coefficient_list_divmod
 - poly, 353
- coefficients_modulo
 - poly, 351
- COEFFICIENTSONLY
 - ftypes.h, 1459
- COEFFSYMBOL
 - ftypes.h, 1420
- coefs
 - POLYMOD, 363
- CoElse
 - compcomm.c, 630
 - declare.h, 943
- CoElself
 - compcomm.c, 631
 - declare.h, 943
- CoEmptySpectator
 - declare.h, 1029
 - spectator.c, 2821
- CoEndArgument
 - compcomm.c, 624
 - declare.h, 943
- CoEndDo
 - compcomm.c, 635
 - declare.h, 1012
- CoEndIf
 - compcomm.c, 631
 - declare.h, 944
- CoEndInExpression
 - compcomm.c, 629
 - declare.h, 940
- CoEndInside
 - compcomm.c, 624
 - declare.h, 944
- CoEndModel
 - declare.h, 1034
 - model.c, 1786
- CoEndRepeat
 - compcomm.c, 629
 - declare.h, 944
- CoEndSwitch
 - compcomm.c, 637
 - declare.h, 960
- CoEndTerm
 - compcomm.c, 632
 - declare.h, 944
- CoEndWhile
 - compcomm.c, 631
 - declare.h, 944
- CoEvaluate
 - float.c, 1309
- CoExit
 - compcomm.c, 628
 - declare.h, 944
- CoExtraSymbols
 - compcomm.c, 635
 - declare.h, 1012
- CoFactArg
 - compcomm.c, 625
 - declare.h, 944

- CoFactDollar
 - compcomm.c, [635](#)
 - declare.h, [945](#)
- CoFactorize
 - compcomm.c, [636](#)
 - declare.h, [945](#)
- CoFill
 - comexpr.c, [590](#)
 - declare.h, [945](#)
- CoFillExpression
 - comexpr.c, [590](#)
 - declare.h, [946](#)
- CoFindLoop
 - compcomm.c, [631](#)
 - declare.h, [969](#)
- CoFixIndex
 - compcomm.c, [620](#)
 - declare.h, [946](#)
- CoFlags
 - compcomm.c, [619](#)
 - declare.h, [951](#)
- CoFormat
 - compcomm.c, [618](#)
 - declare.h, [946](#)
- CoFromPolynomial
 - compcomm.c, [634](#)
 - declare.h, [1011](#)
- CoFunction
 - declare.h, [899](#)
 - names.c, [1862](#)
- CoFunPowers
 - compcomm.c, [632](#)
 - declare.h, [969](#)
- CoGlobal
 - comexpr.c, [588](#)
 - declare.h, [946](#)
- CoGlobalFactorized
 - comexpr.c, [588](#)
 - declare.h, [946](#)
- CoGoTo
 - compcomm.c, [623](#)
 - declare.h, [946](#)
- CoHide
 - compcomm.c, [622](#)
 - declare.h, [954](#)
- Cold
 - comexpr.c, [589](#)
 - declare.h, [946](#)
- ColdExpression
 - comexpr.c, [590](#)
 - declare.h, [965](#)
- ColdNew
 - comexpr.c, [589](#)
 - declare.h, [947](#)
- ColdOld
 - comexpr.c, [588](#)
 - declare.h, [947](#)
- Colf
 - compcomm.c, [630](#)
 - declare.h, [947](#)
- ColfMatch
 - comexpr.c, [589](#)
 - declare.h, [947](#)
- ColfNoMatch
 - comexpr.c, [589](#)
 - declare.h, [947](#)
- ColIndex
 - declare.h, [947](#)
 - names.c, [1861](#)
- ColnExpression
 - compcomm.c, [629](#)
 - declare.h, [940](#)
- ColnParallel
 - compcomm.c, [628](#)
 - declare.h, [940](#)
- ColInside
 - compcomm.c, [624](#)
 - declare.h, [939](#)
- ColInsideFirst
 - compcomm.c, [619](#)
 - declare.h, [947](#)
- ColIntoHide
 - compcomm.c, [622](#)
 - declare.h, [954](#)
- CoKeep
 - compcomm.c, [619](#)
 - declare.h, [948](#)
- CoLabel
 - compcomm.c, [624](#)
 - declare.h, [948](#)
- CollectFun
 - C_const, [66](#)
- CollectOverFlag
 - S_const, [388](#)
- CollectPercentage
 - C_const, [69](#)
- CoLoad
 - declare.h, [948](#)
 - store.c, [2863](#)
- CoLocal
 - comexpr.c, [588](#)
 - declare.h, [948](#)
- CoLocalFactorized
 - comexpr.c, [588](#)
 - declare.h, [948](#)
- CoMakeInteger
 - compcomm.c, [625](#)
 - declare.h, [951](#)
- CoMany
 - comexpr.c, [589](#)
 - declare.h, [948](#)
- combilast
 - SHvariables, [396](#)
- ComChar
 - P_const, [322](#)
- ComDefer

- C_const, 66
- CoMerge
 - compcomm.c, 633
 - declare.h, 948
- CoMetric
 - compcomm.c, 620
 - declare.h, 949
- comexpr.c, 587, 591
 - CoAssign, 591
 - CoDeallocateTable, 591
 - CoDisorder, 589
 - CoFill, 590
 - CoFillExpression, 590
 - CoGlobal, 588
 - CoGlobalFactorized, 588
 - Cold, 589
 - ColdExpression, 590
 - ColdNew, 589
 - ColdOld, 588
 - ColfMatch, 589
 - ColfNoMatch, 589
 - CoLocal, 588
 - CoLocalFactorized, 588
 - CoMany, 589
 - CoMulti, 589
 - CoMultiply, 590
 - CoOnce, 590
 - CoOnly, 590
 - CoPrintTable, 591
 - CoSelect, 590
 - DoExpr, 588
- comfun
 - T_const, 442
- COMFUNPOWERS
 - ftypes.h, 1456
- comind
 - T_const, 442
- commentchar
 - setfile.c, 2726
- Commercial
 - C_const, 70
- COMMERCIALSIZE
 - fsizes.h, 1359
- Commute
 - declare.h, 834
 - normal.c, 1905
- commute
 - FUN_INFO, 142
 - FuNcTiOn, 144
- CommutelnSet
 - C_const, 52
- comnum
 - T_const, 442
- CoModel
 - declare.h, 1033
 - model.c, 1786
- CoModOption
 - declare.h, 949
- module.c, 1793
- CoModuleOption
 - declare.h, 949
 - module.c, 1793
- CoModulus
 - compcomm.c, 629
 - declare.h, 949
- CompactifyTree
 - declare.h, 896
 - names.c, 1859
- COMPARE
 - structs.h, 2938
- Compare1
 - declare.h, 836
 - sort.c, 2757
- compare_degree_vector
 - poly, 354
- CompareArgs
 - declare.h, 906
 - tools.c, 3124
- COMPAREDUMMY
 - structs.h, 2936
- CompareFunctions
 - declare.h, 834
 - normal.c, 1905
- CompareHSymbols
 - declare.h, 996
 - sort.c, 2758
- CompareRoutine
 - R_const, 377
- CompareSymbols
 - declare.h, 996
 - sort.c, 2757
- CompareTerms
 - declare.h, 826
- CompArg
 - declare.h, 835
 - tools.c, 3124
- compbuffer
 - SWITCHTABLE, 429
- CompCoef
 - declare.h, 835
 - reken.c, 2593
- compcomm.c, 615, 639
 - Add2ComStrings, 623
 - AddComString, 623
 - AddToCom, 623
 - CoAntiBracket, 630
 - CoAntiPutInside, 637
 - CoAntiSymmetrize, 626
 - CoArgExplode, 633
 - CoArgImplode, 633
 - CoArgToExtraSymbol, 634
 - CoArgument, 624
 - CoBracket, 630
 - CoBreak, 637
 - CoCase, 637
 - CoChainin, 628

CoChainout, [628](#)
CoChisholm, [627](#)
CoClearTable, [634](#)
CoClearUserFlag, [638](#)
CoCollect, [618](#)
CoCompress, [618](#)
CoContract, [623](#)
CoCreateAll, [638](#)
CoCreateAllLoops, [638](#)
CoCreateAllPaths, [638](#)
CoCycleSymmetrize, [626](#)
CoDefault, [637](#)
CoDelete, [619](#)
CoDenominators, [634](#)
CoDiscard, [623](#)
CoDo, [635](#)
CoDrop, [621](#)
CoDropCoefficient, [634](#)
CoDropSymbols, [634](#)
CoElse, [630](#)
CoElseIf, [631](#)
CoEndArgument, [624](#)
CoEndDo, [635](#)
CoEndIf, [631](#)
CoEndInExpression, [629](#)
CoEndInside, [624](#)
CoEndRepeat, [629](#)
CoEndSwitch, [637](#)
CoEndTerm, [632](#)
CoEndWhile, [631](#)
CoExit, [628](#)
CoExtraSymbols, [635](#)
CoFactArg, [625](#)
CoFactDollar, [635](#)
CoFactorize, [636](#)
CoFindLoop, [631](#)
CoFixIndex, [620](#)
CoFlags, [619](#)
CoFormat, [618](#)
CoFromPolynomial, [634](#)
CoFunPowers, [632](#)
CoGoTo, [623](#)
CoHide, [622](#)
CoIf, [630](#)
CoInExpression, [629](#)
CoInParallel, [628](#)
CoInside, [624](#)
CoInsideFirst, [619](#)
CoIntoHide, [622](#)
CoKeep, [619](#)
CoLabel, [624](#)
CoMakeInteger, [625](#)
CoMerge, [633](#)
CoMetric, [620](#)
CoModulus, [629](#)
CoMultiBracket, [630](#)
CoNFactorize, [636](#)
CoNoDrop, [621](#)
CoNoHide, [622](#)
CoNoIntoHide, [622](#)
CoNormalize, [624](#)
CoNoSkip, [622](#)
CoNotInParallel, [628](#)
CoNoUnHide, [622](#)
CoNPrint, [620](#)
CoNUnFactorize, [636](#)
CoNWrite, [626](#)
CoOff, [619](#)
CoOn, [619](#)
CoOptimizeOption, [636](#)
CoPolyFun, [632](#)
CoPolyRatFun, [632](#)
CoPopHide, [621](#)
CoPrint, [620](#)
CoPrintB, [620](#)
CoProcessBucket, [633](#)
CoProperCount, [619](#)
CoPushHide, [620](#)
CoPutInside, [636](#)
CoRatio, [626](#)
CoRCycleSymmetrize, [626](#)
CoRedefine, [626](#)
CoRenumber, [627](#)
CoRepeat, [629](#)
CoReplaceLoop, [631](#)
CoSetExitFlag, [629](#)
CoSetUserFlag, [638](#)
CoSkip, [621](#)
CoSort, [632](#)
CoSplitArg, [625](#)
CoSplitFirstArg, [625](#)
CoSplitLastArg, [625](#)
CoStuffle, [633](#)
CoSum, [627](#)
CoSwitch, [637](#)
CoSymmetrize, [625](#)
CoTerm, [632](#)
CoThreadBucket, [633](#)
CoToPolynomial, [634](#)
CoToTensor, [627](#)
CoToVector, [627](#)
CoTrace4, [627](#)
CoTraceN, [627](#)
CoTryReplace, [629](#)
CoUnFactorize, [636](#)
CoUnHide, [622](#)
CoUnitTrace, [632](#)
CountComp, [630](#)
CoWhile, [631](#)
CoWrite, [626](#)
DoArgPlode, [633](#)
DoArgument, [624](#)
DoBrackets, [630](#)
DoChain, [628](#)
DoFactorize, [636](#)
DoFindLoop, [631](#)

- DoInParallel, [628](#)
- DoPrint, [620](#)
- DoPutInside, [637](#)
- DoSymmetrize, [625](#)
- GetDoParam, [635](#)
- GetIfDollarFactor, [635](#)
- SetExpr, [621](#)
- SetExprCases, [621](#)
- setonoff, [618](#)
- CompGroup
 - declare.h, [835](#)
 - function.c, [1489](#)
- CompileAlgebra
 - compiler.c, [731](#)
 - declare.h, [962](#)
- CompileLevel
 - C_const, [57](#)
- compiler.c, [728](#), [733](#)
 - alfatable1, [733](#)
 - CodeFactors, [732](#)
 - CodeGenerator, [732](#)
 - CompileAlgebra, [731](#)
 - CompileStatement, [731](#)
 - CompileSubExpressions, [732](#)
 - CompleteTerm, [732](#)
 - findcommand, [730](#)
 - GenerateFactors, [732](#)
 - inictable, [730](#)
 - insubexpbuffers, [733](#)
 - IsIdStatement, [731](#)
 - IsRHS, [731](#)
 - OPTION0, [730](#)
 - OPTION1, [730](#)
 - OPTION2, [730](#)
 - ParenthesesTest, [730](#)
 - REDUCESUBEXPBUFFERS, [730](#)
 - SkipAName, [731](#)
 - subexpbuffers, [733](#)
 - TestTables, [731](#)
 - topsubexpbuffers, [733](#)
- COMPILERBUFFER
 - fsizes.h, [1360](#)
- CompileStatement
 - compiler.c, [731](#)
 - declare.h, [925](#)
- CompileSubExpressions
 - compiler.c, [732](#)
 - declare.h, [965](#)
- compiletype
 - C_const, [54](#)
- COMPINC
 - fsizes.h, [1362](#)
- CompleteTerm
 - compiler.c, [732](#)
 - declare.h, [966](#)
- complex
 - FuNcTiOn, [144](#)
 - SyMbOl, [430](#)
 - VeCtOr, [489](#)
- compMat
 - MGraph, [210](#)
- ComposeTableNames
 - declare.h, [992](#)
 - minos.c, [1760](#)
- ComPress
 - declare.h, [928](#)
 - sort.c, [2758](#)
- compress.c, [760](#)
- COMPRESSBUFFER
 - fsizes.h, [1360](#)
- CompressBuffer
 - R_const, [377](#)
- compression
 - ExPrEsSiOn, [123](#)
- CompressPointer
 - R_const, [377](#)
- CompressSize
 - InDeXeNtRy, [153](#)
 - M_const, [173](#)
- compressSize
 - N_const, [258](#)
- compressSpace
 - N_const, [254](#)
- ComprTop
 - R_const, [377](#)
- COMPTREE
 - structs.h, [2934](#)
- comsym
 - T_const, [441](#)
- comtool.c, [769](#), [775](#)
 - AddLHS, [771](#)
 - AddNtoC, [773](#)
 - AddNtoL, [772](#)
 - AddRHS, [771](#)
 - clearcbuf, [770](#)
 - ClearTree, [774](#)
 - DoubleCbuffer, [771](#)
 - FindTree, [774](#)
 - finishcbuf, [770](#)
 - inibufs, [770](#)
 - IniFbuffer, [774](#)
 - InsTree, [773](#)
 - numcommute, [774](#)
 - RedoTree, [774](#)
- comtool.h, [782](#), [783](#)
- CoMulti
 - comexpr.c, [589](#)
 - declare.h, [949](#)
- CoMultiBracket
 - compcomm.c, [630](#)
 - declare.h, [941](#)
- CoMultiply
 - comexpr.c, [590](#)
 - declare.h, [949](#)
- CoNFactorize
 - compcomm.c, [636](#)

- declare.h, 945
- CoNFunction
 - declare.h, 950
 - names.c, 1862
- conid
 - EEdge, 99
- CONJUGATION
 - ftypes.h, 1411
- connComp
 - EGraph, 106
- connect
 - Assign, 19
- connectClass
 - MGraph, 211
- connectLeg
 - MGraph, 211
- connectNode
 - MGraph, 211
- connVisit
 - EGraph, 106
- CoNoDrop
 - compcomm.c, 621
 - declare.h, 950
- CoNoHide
 - compcomm.c, 622
 - declare.h, 955
- CoNoIntoHide
 - compcomm.c, 622
 - declare.h, 955
- CoNormalize
 - compcomm.c, 624
 - declare.h, 950
- CoNoSkip
 - compcomm.c, 622
 - declare.h, 950
- CoNotInParallel
 - compcomm.c, 628
 - declare.h, 940
- CoNoUnHide
 - compcomm.c, 622
 - declare.h, 955
- CoNPrint
 - compcomm.c, 620
 - declare.h, 950
- ConstructName
 - declare.h, 1032
 - pre.c, 2365
- CoNTable
 - declare.h, 957
 - names.c, 1863
- CoNTensor
 - declare.h, 950
 - names.c, 1862
- ContentMerge
 - declare.h, 983
 - execute.c, 1173
- contents
 - DoLoOp, 91
- CONTENTTERM
 - ftypes.h, 1416
- CONTRACT
 - ftypes.h, 1432
- CoNUnFactorize
 - compcomm.c, 636
 - declare.h, 945
- ConvertArgument
 - declare.h, 1017
 - ratio.c, 2540
- convertblock
 - declare.h, 989
 - minos.c, 1758
- ConvertFromPoly
 - declare.h, 1010
 - notation.c, 1971
- convertiniinfo
 - declare.h, 989
 - minos.c, 1758
- convertnamesblock
 - declare.h, 989
 - minos.c, 1758
- ConvertParticle
 - diawrap.cc, 1068
- ConvertToPoly
 - declare.h, 1010
 - notation.c, 1971
- ConWord
 - declare.h, 907
 - tools.c, 3117
- CoNWrite
 - compcomm.c, 626
 - declare.h, 950
- CoOff
 - compcomm.c, 619
 - declare.h, 951
- CoOn
 - compcomm.c, 619
 - declare.h, 951
- CoOnce
 - comexpr.c, 590
 - declare.h, 951
- CoOnly
 - comexpr.c, 590
 - declare.h, 951
- CoOptimizeOption
 - compcomm.c, 636
 - declare.h, 951
- CoParticle
 - declare.h, 1033
 - model.c, 1786
- CoPolyFun
 - compcomm.c, 632
 - declare.h, 952
- CoPolyRatFun
 - compcomm.c, 632
 - declare.h, 952
- CoPopHide

- compcomm.c, 621
- declare.h, 954
- CoPrint
 - compcomm.c, 620
 - declare.h, 952
- CoPrintB
 - compcomm.c, 620
 - declare.h, 952
- CoPrintTable
 - comexpr.c, 591
 - declare.h, 971
- CoProcessBucket
 - compcomm.c, 633
 - declare.h, 954
- CoProperCount
 - compcomm.c, 619
 - declare.h, 952
- CoPushHide
 - compcomm.c, 620
 - declare.h, 954
- CoPutInside
 - compcomm.c, 636
 - declare.h, 940
- copy
 - EEdge, 97
 - EGraph, 104
 - ENode, 116
 - MNodeClass, 223
 - T_MNodeClass, 459
- COPY1ARG
 - declare.h, 814
- COPYARG
 - declare.h, 813
- CopyArg
 - declare.h, 812
- CopyExpression
 - declare.h, 993
 - store.c, 2867
- CopyFile
 - declare.h, 901
 - tools.c, 3113
- COPYFUN
 - declare.h, 813
- COPYFUN3
 - declare.h, 813
- COPYLONG
 - reen.c, 2585
- COPYSUB
 - declare.h, 814
- CopyTree
 - declare.h, 896
 - names.c, 1859
- CoRatio
 - compcomm.c, 626
 - declare.h, 953
- CoRCycleSymmetrize
 - compcomm.c, 626
 - declare.h, 952
- CoRedefine
 - compcomm.c, 626
 - declare.h, 953
- CoRemoveSpectator
 - declare.h, 1029
 - spectator.c, 2821
- CoRenumber
 - compcomm.c, 627
 - declare.h, 953
- CoRepeat
 - compcomm.c, 629
 - declare.h, 953
- CoReplaceLoop
 - compcomm.c, 631
 - declare.h, 969
- CoSave
 - declare.h, 953
 - store.c, 2863
- CoSelect
 - comexpr.c, 590
 - declare.h, 953
- CoSet
 - declare.h, 953
 - names.c, 1864
- CoSetExitFlag
 - compcomm.c, 629
 - declare.h, 954
- CoSetUserFlag
 - compcomm.c, 638
 - declare.h, 1034
- COSFUNCTION
 - ftypes.h, 1413
- COSHFUNCTION
 - ftypes.h, 1414
- CoSkip
 - compcomm.c, 621
 - declare.h, 954
- CoSort
 - compcomm.c, 632
 - declare.h, 955
- CoSplitArg
 - compcomm.c, 625
 - declare.h, 955
- CoSplitFirstArg
 - compcomm.c, 625
 - declare.h, 955
- CoSplitLastArg
 - compcomm.c, 625
 - declare.h, 956
- COST, 75
 - add, 76
 - div, 76
 - mul, 76
 - pow, 76
- CoStrictRounding
 - float.c, 1308
- CoStuffle
 - compcomm.c, 633

- declare.h, 949
- CoSum
 - compcomm.c, 627
 - declare.h, 956
- CoSwitch
 - compcomm.c, 637
 - declare.h, 959
- CoSymbol
 - declare.h, 956
 - names.c, 1860
- CoSymmetrize
 - compcomm.c, 625
 - declare.h, 956
- CoTable
 - declare.h, 956
 - names.c, 1863
- CoTableBase
 - declare.h, 942
 - tables.c, 2994
- CoTBaddto
 - declare.h, 960
 - tables.c, 2994
- CoTBaudit
 - declare.h, 960
 - tables.c, 2995
- CoTBCleanup
 - declare.h, 960
 - tables.c, 2996
- CoTBcreate
 - declare.h, 960
 - tables.c, 2994
- CoTBenter
 - declare.h, 960
 - tables.c, 2995
- CoTBhelp
 - declare.h, 961
 - tables.c, 2996
- CoTBload
 - declare.h, 961
 - tables.c, 2995
- CoTBoff
 - declare.h, 961
 - tables.c, 2996
- CoTBon
 - declare.h, 961
 - tables.c, 2995
- CoTBopen
 - declare.h, 961
 - tables.c, 2994
- CoTBreplace
 - declare.h, 961
 - tables.c, 2996
- CoTBuse
 - declare.h, 961
 - tables.c, 2996
- CoTerm
 - compcomm.c, 632
 - declare.h, 956
- CoTestUse
 - declare.h, 962
 - tables.c, 2995
- CoThreadBucket
 - compcomm.c, 633
 - declare.h, 962
- CoToFloat
 - float.c, 1307
- CoToPolynomial
 - compcomm.c, 634
 - declare.h, 1011
- CoToRat
 - float.c, 1308
- CoToSpectator
 - declare.h, 1029
 - spectator.c, 2820
- CoToTensor
 - compcomm.c, 627
 - declare.h, 957
- CoToVector
 - compcomm.c, 627
 - declare.h, 957
- CoTrace4
 - compcomm.c, 627
 - declare.h, 957
- CoTraceN
 - compcomm.c, 627
 - declare.h, 957
- CoTransform
 - declare.h, 958
 - transform.c, 3178
- CoTryReplace
 - compcomm.c, 629
 - declare.h, 958
- COULDCOMMUTE
 - ftypes.h, 1467
- CoUnFactorize
 - compcomm.c, 636
 - declare.h, 945
- CoUnHide
 - compcomm.c, 622
 - declare.h, 955
- CoUnitTrace
 - compcomm.c, 632
 - declare.h, 952
- count
 - PNodeClass, 342
- count_operators
 - optimize.cc, 2023
- count_operators_cse
 - optimize.cc, 2029
- count_operators_cse_topdown
 - optimize.cc, 2029
- CountComp
 - compcomm.c, 630
 - declare.h, 938
- CountDo
 - declare.h, 837

- reshuf.c, [2644](#)
- counter
 - ExPrEsSiOn, [122](#)
- CountFun
 - declare.h, [837](#)
 - reshuf.c, [2644](#)
- COUNTFUNCTION
 - ftypes.h, [1411](#)
- countfunnum
 - M_const, [188](#)
- CountTerms1
 - declare.h, [988](#)
 - execute.c, [1173](#)
- coupl
 - FGInput, [127](#)
- couple
 - PNodeClass, [341](#)
- couplings
 - MoDeL, [235](#)
 - VeRtEx, [490](#)
- CoVector
 - declare.h, [959](#)
 - names.c, [1861](#)
- CoVertex
 - declare.h, [1034](#)
 - model.c, [1786](#)
- CoWhile
 - compcomm.c, [631](#)
 - declare.h, [959](#)
- CoWrite
 - compcomm.c, [626](#)
 - declare.h, [959](#)
- cple
 - NCInput, [271](#)
 - PGInput, [337](#)
- cpigcp
 - Model, [234](#)
- cpilg
 - Model, [234](#)
- cpignvl
 - Model, [234](#)
- cpigvl
 - Model, [234](#)
- cpileft
 - Assign, [26](#)
- cprocedureExtension
 - P_const, [318](#)
- CRANGE
 - ftypes.h, [1394](#)
- Crash
 - declare.h, [988](#)
 - tools.c, [3125](#)
- CreateExpression
 - declare.h, [1016](#)
 - ratio.c, [2538](#)
- CreateFile
 - declare.h, [900](#)
 - tools.c, [3113](#)
- CreateHandle
 - declare.h, [901](#)
 - tools.c, [3114](#)
- CreateLogFile
 - declare.h, [900](#)
 - tools.c, [3113](#)
- CreateStream
 - declare.h, [933](#)
 - tools.c, [3112](#)
- CreateVertex
 - declare.h, [1033](#)
 - model.c, [1786](#)
- csav
 - SGroup, [394](#)
- CSEEq, [76](#)
 - operator(), [77](#)
- CSEHash, [77](#)
 - operator(), [77](#)
- CSET
 - ftypes.h, [1393](#)
- CSUBEXP
 - ftypes.h, [1393](#)
- csum
 - Interaction, [160](#)
- CSYMBOL
 - ftypes.h, [1392](#)
- cTable
 - FixedGlobals, [136](#)
- CTD
 - minos.c, [1757](#)
- cTerm
 - N_const, [248](#)
- ctloop
 - MCOpI, [205](#)
- ctotal
 - Process, [371](#)
- ctyp
 - PGInput, [337](#)
- CurBufWrt
 - O_const, [282](#)
- curcl
 - MGraph, [213](#)
 - T_MGraph, [455](#)
- CurDictFunWithArgs
 - O_const, [286](#)
- CurDictInDollars
 - O_const, [287](#)
- CurDictNotInFunctions
 - O_const, [286](#)
- CurDictNumbers
 - O_const, [286](#)
- CurDictNumberWarning
 - O_const, [286](#)
- CurDictSpecials
 - O_const, [286](#)
- CurDictVariables
 - O_const, [286](#)
- curdirp

- setfile.c, 2726
- CurDum
 - R_const, 380
- CurExpr
 - R_const, 382
- current
 - TaBIeBAsE, 462
- CURRENTBRACKET
 - execute.c, 1170
- CurrentDictionary
 - O_const, 285
- currentExternalChannel
 - X_const, 493
- currentMODEL
 - TERMINFO, 471
- currentModel
 - TERMINFO, 471
- currentPrompt
 - X_const, 492
- CurrentStream
 - C_const, 47
- currentTerm
 - N_const, 253
- cursortdirp
 - setfile.c, 2726
- cut
 - EEdge, 99
- cvallist
 - lInput, 149
- CVECTOR
 - ftypes.h, 1392
- CVECTOR1
 - ftypes.h, 1394
- cycle
 - DiStRiBuTe, 86
 - PeRmUtE, 332
 - PeRmUtEp, 333
- CYCLE1
 - declare.h, 812
- CYCLEARG
 - ftypes.h, 1462
- CYCLESYMMETRIC
 - ftypes.h, 1448
- CYCLI
 - ftypes.h, 1474
- CYCLR
 - ftypes.h, 1474
- d
 - flint::fmpz, 138
 - flint::mpoly, 243
 - flint::mpoly_ctx, 244
 - flint::mpoly_factor, 245
 - flint::poly, 343
 - flint::poly_factor, 362
- DAEMON
 - pre.c, 2348
- daemonize
 - X_const, 493
- data
 - node, 274
- date
 - objects, 290
- dbase, 78
 - fullname, 80
 - handle, 79
 - iblocks, 79
 - info, 78
 - mode, 78
 - name, 79
 - nblocks, 79
 - rwmode, 79
 - tablenamefill, 79
 - tablenames, 80
 - tablenamessize, 79
 - topnumber, 79
- DBGOUT
 - parallel.c, 2097
- DBGOUT_NINTERMS
 - parallel.c, 2097
- dbufnum
 - M_const, 178
- DeAllocFileHandle
 - declare.h, 978
 - setfile.c, 2725
- DEBUG
 - wildcard.c, 3255
- DebugFlag
 - P_const, 322
- debugFlags
 - C_const, 70
- debugflags
 - OPTIMIZE, 297
- DECLARATION
 - ftypes.h, 1390
- declare.h, 784, 1037
 - ABS, 806
 - AccumGCD, 830
 - Add2Com, 820
 - Add2ComStrings, 933
 - ADD2POS, 818
 - Add3Com, 821
 - Add4Com, 821
 - Add5Com, 821
 - AddArgs, 830
 - AddArrayIndex, 828
 - AddCoef, 830
 - AddComString, 962
 - AddDictionary, 1026
 - AddDollar, 897
 - AddDubious, 898
 - AddExpression, 897
 - AddFunction, 898
 - AddIndex, 898
 - AddLHS, 930
 - AddLineFeed, 808
 - AddLong, 831

AddName, [894](#)
AddNtoC, [932](#)
AddNtoL, [931](#)
AddObject, [992](#)
AddPLon, [831](#)
AddPoly, [831](#)
ADDPOS, [817](#)
AddPotModdollar, [973](#)
AddRat, [832](#)
AddRHS, [931](#)
AddSet, [899](#)
AddSymbol, [897](#)
AddTableName, [992](#)
AddToCB, [812](#)
AddToCom, [933](#)
AddToDictionary, [1026](#)
AddToDollarBuffer, [967](#)
AddToIndex, [990](#)
AddToLine, [833](#)
AddToPreTypes, [929](#)
AddToScratch, [1030](#)
AddToString, [922](#)
AddVector, [898](#)
AddWild, [833](#)
AddWildcardName, [929](#)
AdjustRenumScratch, [852](#)
AllLoops, [1035](#)
AllocFileHandle, [978](#)
AllocSetups, [908](#)
AllocSort, [909](#)
AllocSortFileName, [909](#)
AllPaths, [1036](#)
Apply, [844](#)
ApplyExec, [844](#)
ApplyReset, [844](#)
AreArgsEqual, [906](#)
ArgDotproductMerge, [937](#)
ArgFactorize, [934](#)
ArgSymbolMerge, [937](#)
ArgumentExplode, [987](#)
ArgumentImplode, [987](#)
AssignDollar, [967](#)
BACKINOUT, [812](#)
BASEPOSITION, [818](#)
Bernoulli, [849](#)
BigLong, [833](#)
BinarySearch, [979](#)
BinomGen, [833](#)
BracketNormalize, [863](#)
CacheNumberFree, [823](#)
CacheNumberMalloc, [822](#)
CacheNumberMallocAddMemory, [1005](#)
CatchDollar, [967](#)
ChainIn, [987](#)
ChainOut, [987](#)
CharOut, [910](#)
CheckRecoveryFile, [1002](#)
CheckTableDeclarations, [843](#)
CheckWild, [833](#)
Chisholm, [834](#)
CleanDollarFactors, [971](#)
CleanExpr, [834](#)
CleanUp, [834](#)
CleanupArgCache, [936](#)
CleanupSort, [978](#)
CleanupTerm, [982](#)
ClearBracketIndex, [985](#)
clearcbuf, [977](#)
ClearMacro, [912](#)
ClearOptimize, [975](#)
ClearPushback, [909](#)
ClearSpectators, [1029](#)
ClearTableTree, [976](#)
ClearTree, [967](#)
ClearWild, [834](#)
ClearWildcardNames, [929](#)
closeAllExternalChannels, [995](#)
CloseChannel, [903](#)
closeExternalChannel, [995](#)
CloseFile, [900](#)
CloseStream, [893](#)
CmpArray, [907](#)
CoAntiBracket, [938](#)
CoAntiPutInside, [941](#)
CoAntiSymmetrize, [939](#)
CoApply, [942](#)
CoArgExplode, [939](#)
CoArgImplode, [939](#)
CoArgToExtraSymbol, [1012](#)
CoArgument, [939](#)
CoAssign, [965](#)
CoAuto, [959](#)
CoBracket, [940](#)
CoBreak, [959](#)
CoCanonicalize, [840](#)
CoCase, [959](#)
CoCFunction, [941](#)
CoChainin, [958](#)
CoChainout, [958](#)
CoChisholm, [958](#)
CoClearTable, [958](#)
CoClearUserFlag, [1034](#)
CoCollect, [941](#)
CoCommutelnSet, [899](#)
CoCompress, [941](#)
CoContract, [941](#)
CoCopySpectator, [1029](#)
CoCreateAll, [1035](#)
CoCreateAllLoops, [1034](#)
CoCreateAllPaths, [1034](#)
CoCreateSpectator, [1028](#)
CoCTable, [957](#)
CoCTensor, [941](#)
CoCycleSymmetrize, [942](#)
CoDeallocateTable, [971](#)
CodeFactors, [966](#)

- CoDefault, [960](#)
- CodeGenerator, [965](#)
- CoDelete, [942](#)
- CoDenominators, [942](#)
- CodeToLine, [828](#)
- CoDimension, [942](#)
- CoDiscard, [942](#)
- CoDisorder, [943](#)
- CoDo, [1012](#)
- CoDrop, [943](#)
- CoDropCoefficient, [943](#)
- CoDropSymbols, [943](#)
- CoElse, [943](#)
- CoElseif, [943](#)
- CoEmptySpectator, [1029](#)
- CoEndArgument, [943](#)
- CoEndDo, [1012](#)
- CoEndIf, [944](#)
- CoEndInExpression, [940](#)
- CoEndInside, [944](#)
- CoEndModel, [1034](#)
- CoEndRepeat, [944](#)
- CoEndSwitch, [960](#)
- CoEndTerm, [944](#)
- CoEndWhile, [944](#)
- CoExit, [944](#)
- CoExtraSymbols, [1012](#)
- CoFactArg, [944](#)
- CoFactDollar, [945](#)
- CoFactorize, [945](#)
- CoFill, [945](#)
- CoFillExpression, [946](#)
- CoFindLoop, [969](#)
- CoFixIndex, [946](#)
- CoFlags, [951](#)
- CoFormat, [946](#)
- CoFromPolynomial, [1011](#)
- CoFunction, [899](#)
- CoFunPowers, [969](#)
- CoGlobal, [946](#)
- CoGlobalFactorized, [946](#)
- CoGoTo, [946](#)
- CoHide, [954](#)
- Cold, [946](#)
- ColdExpression, [965](#)
- ColdNew, [947](#)
- ColdOld, [947](#)
- Colf, [947](#)
- ColfMatch, [947](#)
- ColfNoMatch, [947](#)
- ColIndex, [947](#)
- ColInExpression, [940](#)
- ColInParallel, [940](#)
- ColInside, [939](#)
- ColInsideFirst, [947](#)
- ColIntoHide, [954](#)
- CoKeep, [948](#)
- CoLabel, [948](#)
- CoLoad, [948](#)
- CoLocal, [948](#)
- CoLocalFactorized, [948](#)
- CoMakeInteger, [951](#)
- CoMany, [948](#)
- CoMerge, [948](#)
- CoMetric, [949](#)
- Commute, [834](#)
- CoModel, [1033](#)
- CoModOption, [949](#)
- CoModuleOption, [949](#)
- CoModulus, [949](#)
- CompactifyTree, [896](#)
- Compare1, [836](#)
- CompareArgs, [906](#)
- CompareFunctions, [834](#)
- CompareHSymbols, [996](#)
- CompareSymbols, [996](#)
- CompareTerms, [826](#)
- CompArg, [835](#)
- CompCoef, [835](#)
- CompGroup, [835](#)
- CompileAlgebra, [962](#)
- CompileStatement, [925](#)
- CompileSubExpressions, [965](#)
- CompleteTerm, [966](#)
- ComposeTableNames, [992](#)
- ComPress, [928](#)
- CoMulti, [949](#)
- CoMultiBracket, [941](#)
- CoMultiply, [949](#)
- CoNFactorize, [945](#)
- CoNFunction, [950](#)
- CoNoDrop, [950](#)
- CoNoHide, [955](#)
- CoNoIntoHide, [955](#)
- CoNormalize, [950](#)
- CoNoSkip, [950](#)
- CoNotInParallel, [940](#)
- CoNoUnHide, [955](#)
- CoNPrint, [950](#)
- ConstructName, [1032](#)
- CoNTable, [957](#)
- CoNTensor, [950](#)
- ContentMerge, [983](#)
- CoNUnFactorize, [945](#)
- ConvertArgument, [1017](#)
- convertblock, [989](#)
- ConvertFromPoly, [1010](#)
- convertiniinfo, [989](#)
- convertnamesblock, [989](#)
- ConvertToPoly, [1010](#)
- ConWord, [907](#)
- CoNWrite, [950](#)
- CoOff, [951](#)
- CoOn, [951](#)
- CoOnce, [951](#)
- CoOnly, [951](#)

- CoOptimizeOption, [951](#)
- CoParticle, [1033](#)
- CoPolyFun, [952](#)
- CoPolyRatFun, [952](#)
- CoPopHide, [954](#)
- CoPrint, [952](#)
- CoPrintB, [952](#)
- CoPrintTable, [971](#)
- CoProcessBucket, [954](#)
- CoProperCount, [952](#)
- CoPushHide, [954](#)
- CoPutInside, [940](#)
- COPY1ARG, [814](#)
- COPYARG, [813](#)
- CopyArg, [812](#)
- CopyExpression, [993](#)
- CopyFile, [901](#)
- COPYFUN, [813](#)
- COPYFUN3, [813](#)
- COPYSUB, [814](#)
- CopyTree, [896](#)
- CoRatio, [953](#)
- CoRCycleSymmetrize, [952](#)
- CoRedefine, [953](#)
- CoRemoveSpectator, [1029](#)
- CoRenum, [953](#)
- CoRepeat, [953](#)
- CoReplaceLoop, [969](#)
- CoSave, [953](#)
- CoSelect, [953](#)
- CoSet, [953](#)
- CoSetExitFlag, [954](#)
- CoSetUserFlag, [1034](#)
- CoSkip, [954](#)
- CoSort, [955](#)
- CoSplitArg, [955](#)
- CoSplitFirstArg, [955](#)
- CoSplitLastArg, [956](#)
- CoStuff, [949](#)
- CoSum, [956](#)
- CoSwitch, [959](#)
- CoSymbol, [956](#)
- CoSymmetrize, [956](#)
- CoTable, [956](#)
- CoTableBase, [942](#)
- CoTBaddto, [960](#)
- CoTBaudit, [960](#)
- CoTBCleanup, [960](#)
- CoTBcreate, [960](#)
- CoTBenter, [960](#)
- CoTBhelp, [961](#)
- CoTBload, [961](#)
- CoTBoff, [961](#)
- CoTBon, [961](#)
- CoTBopen, [961](#)
- CoTBreplace, [961](#)
- CoTBuse, [961](#)
- CoTerm, [956](#)
- CoTestUse, [962](#)
- CoThreadBucket, [962](#)
- CoToPolynomial, [1011](#)
- CoToSpectator, [1029](#)
- CoToTensor, [957](#)
- CoToVector, [957](#)
- CoTrace4, [957](#)
- CoTraceN, [957](#)
- CoTransform, [958](#)
- CoTryReplace, [958](#)
- CoUnFactorize, [945](#)
- CoUnHide, [955](#)
- CoUnitTrace, [952](#)
- CountComp, [938](#)
- CountDo, [837](#)
- CountFun, [837](#)
- CountTerms1, [988](#)
- CoVector, [959](#)
- CoVertex, [1034](#)
- CoWhile, [959](#)
- CoWrite, [959](#)
- Crash, [988](#)
- CreateExpression, [1016](#)
- CreateFile, [900](#)
- CreateHandle, [901](#)
- CreateLogFile, [900](#)
- CreateStream, [933](#)
- CreateVertex, [1033](#)
- CYCLE1, [812](#)
- DeAllocFileHandle, [978](#)
- Deferred, [837](#)
- defineChannel, [995](#)
- DeleteObject, [991](#)
- DeleteRecoveryFile, [1003](#)
- DeleteStore, [838](#)
- DenToFunction, [988](#)
- DetCommu, [835](#)
- DetCurDum, [838](#)
- DetVars, [838](#)
- DictFromBytes, [1028](#)
- DictToBytes, [1028](#)
- DIFBASE, [818](#)
- DIFPOS, [818](#)
- DimensionExpression, [837](#)
- DimensionSubterm, [837](#)
- DimensionTerm, [837](#)
- Distribute, [839](#)
- DistrN, [1032](#)
- DIVfunction, [1016](#)
- DivLong, [839](#)
- DIVPOS, [817](#)
- DivRat, [839](#)
- Divvy, [839](#)
- DoArgPlode, [939](#)
- DoArgument, [934](#)
- DoBrackets, [938](#)
- DoBreakDo, [919](#)
- DoCall, [918](#)

- DoCanonicalize, [840](#)
- DoChain, [958](#)
- DoCheckpoint, [1004](#)
- DoClearOptimize, [915](#)
- DoClearUserFlag, [1033](#)
- DoCommentChar, [921](#)
- DoContinueDo, [919](#)
- DoDebug, [919](#)
- DoDefine, [911](#)
- DoDelta, [839](#)
- DoDelta3, [840](#)
- DoDimension, [898](#)
- DoDistrib, [842](#)
- DoDo, [919](#)
- DoElements, [899](#)
- DoElse, [918](#)
- DoElseif, [918](#)
- DoEnddo, [919](#)
- DoEndif, [918](#)
- DoEndInside, [920](#)
- DoEndNamespace, [1032](#)
- DoEndprocedure, [919](#)
- DoEndSwitch, [1031](#)
- DoesCommu, [835](#)
- DoExecStatement, [925](#)
- DoExecute, [890](#)
- DoExpr, [965](#)
- DoExternal, [913](#)
- DoFactDollar, [914](#)
- DoFactorize, [945](#)
- DoFindLoop, [969](#)
- DoFromExternal, [913](#)
- Dof, [918](#)
- Dofdef, [917](#)
- Dofndef, [918](#)
- DofStatement, [845](#)
- Dofydef, [917](#)
- DoInclude, [913](#)
- DoInParallel, [940](#)
- DoinParallel, [986](#)
- DoInside, [920](#)
- DollarFactorize, [971](#)
- DOLLARNAME, [816](#)
- DollarRaiseLow, [898](#)
- DolToFunction, [970](#)
- DolToIndex, [971](#)
- DolToLong, [971](#)
- DolToNumber, [970](#)
- DolToSymbol, [970](#)
- DolToTensor, [970](#)
- DolToTerms, [979](#)
- DolToVector, [970](#)
- DoMessage, [915](#)
- DoModDollar, [986](#)
- DoModLocal, [986](#)
- DoModMax, [986](#)
- DoModMin, [986](#)
- DoModSum, [986](#)
- DoNamespace, [1032](#)
- DoNoParallel, [985](#)
- DonotinParallel, [987](#)
- DoOnePow, [845](#)
- DoOptimize, [915](#)
- DoParallel, [985](#)
- DoPartitions, [840](#)
- DoPermutations, [842](#)
- DoPipe, [917](#)
- DoPipeStatement, [925](#)
- DoPolyfun, [925](#)
- DoPolyratfun, [925](#)
- DoPrcExtension, [921](#)
- DoPreAdd, [1025](#)
- DoPreAddSeparator, [994](#)
- DoPreAppend, [915](#)
- DoPreAppendPath, [1030](#)
- DoPreAssign, [916](#)
- DoPreBreak, [916](#)
- DoPreCase, [916](#)
- DoPreClose, [920](#)
- DoPreCloseDictionary, [1025](#)
- DoPreCreate, [916](#)
- DoPreDefault, [916](#)
- DoPreEndSwitch, [916](#)
- DoPreExchange, [917](#)
- DoPreOpenDictionary, [1025](#)
- DoPreOut, [915](#)
- DoPrePrependPath, [1030](#)
- DoPrePrintTimes, [920](#)
- DoPreRemove, [920](#)
- DoPreReset, [921](#)
- DoPreRmSeparator, [994](#)
- DoPreShow, [917](#)
- DoPreSortReallocate, [921](#)
- DoPreSwitch, [916](#)
- DoPreUseDictionary, [1025](#)
- DoPreWrite, [920](#)
- DoPrint, [933](#)
- DoProcedure, [920](#)
- DoProcessBucket, [986](#)
- DoPrompt, [914](#)
- DoPutInside, [938](#)
- DoRecovery, [1003](#)
- DoRedefine, [911](#)
- DoReverseInclude, [913](#)
- DoRevert, [846](#)
- DoRmExternal, [914](#)
- DoSetExternal, [914](#)
- DoSetExternalAttr, [914](#)
- DoSetRandom, [914](#)
- DoSetups, [894](#)
- DoSetUserFlag, [1033](#)
- DoShattering, [841](#)
- DoShuffle, [826](#)
- DoShuffle, [842](#)
- DoSkipExtraSymbols, [915](#)
- DoStuff, [842](#)

- DoSumF1, [846](#)
- DoSumF2, [846](#)
- DoSwitch, [1031](#)
- DoSymmetrize, [934](#)
- DoSystem, [917](#)
- DoTable, [956](#)
- DoTableExpansion, [841](#)
- DoTail, [891](#)
- DoTempSet, [899](#)
- DoTerminate, [918](#)
- DoTheta, [847](#)
- DoTimeOutAfter, [915](#)
- DoToExternal, [913](#)
- DoTopologyCanonicalize, [841](#)
- DoubleBuffer, [905](#)
- DoubleCbuffer, [930](#)
- DoubleIfBuffers, [933](#)
- DoubleList, [905](#)
- DoubleLList, [905](#)
- DoubleSwitchBuffers, [1031](#)
- DoUndefine, [913](#)
- DoUse, [1032](#)
- DropCoefficient, [863](#)
- DropSymbols, [863](#)
- DUMMYUSE, [816](#)
- DumpNode, [896](#)
- DumpTree, [896](#)
- EmptyTable, [957](#)
- EndOfToken, [924](#)
- EndSort, [847](#)
- EntVar, [848](#)
- EpfCon, [848](#)
- EpfFind, [848](#)
- EpfGen, [848](#)
- EqualArg, [849](#)
- Error0, [892](#)
- Error1, [892](#)
- Error2, [892](#)
- EvalDoLoopArg, [979](#)
- EvalPrelf, [923](#)
- EXCH, [807](#)
- ExchangeDollars, [981](#)
- ExchangeExpressions, [981](#)
- EXCHINOUT, [812](#)
- EXCHN, [807](#)
- execarg, [889](#)
- ExecInside, [939](#)
- ExecModule, [924](#)
- ExecStore, [924](#)
- execterm, [889](#)
- ExistsObject, [991](#)
- ExpandBuffer, [905](#)
- ExpandRat, [1017](#)
- ExpandTripleDots, [927](#)
- EXPRNAME, [816](#)
- ExprStatus, [1005](#)
- EXTERNLOCK, [824](#)
- EXTERNRWLOCK, [825](#)
- ExtraSymbol, [862](#)
- ExtraSymFun, [1013](#)
- Factorial, [849](#)
- FactorIn, [849](#)
- FactorInExpr, [849](#)
- FILLARG, [813](#)
- FILLEXP, [814](#)
- FILLFUN, [813](#)
- FILLFUN3, [814](#)
- FILLSUB, [814](#)
- FindAll, [850](#)
- FindArg, [936](#)
- FindBracket, [985](#)
- FindCase, [1031](#)
- findcommand, [903](#)
- FindDictionary, [1026](#)
- FindExtraSymbol, [1028](#)
- FindFunction, [1028](#)
- FindFunWithArgs, [1028](#)
- FindIndex, [1028](#)
- FindInIndex, [829](#)
- FindInKeyWord, [911](#)
- FindKeyWord, [911](#)
- FindLocalSubterm, [1010](#)
- FindLus, [969](#)
- FindMulti, [850](#)
- FindOnce, [850](#)
- FindOnly, [850](#)
- FindRange, [1007](#)
- FindRest, [850](#)
- FindrNumber, [850](#)
- FindSubexpression, [1011](#)
- FindSubterm, [1010](#)
- FindSymbol, [1027](#)
- FindTableNumber, [993](#)
- FindTableTree, [977](#)
- FindTB, [843](#)
- FindTree, [966](#)
- FindVar, [845](#)
- FindVector, [1027](#)
- FinilLine, [851](#)
- finishcbuf, [977](#)
- FinishShuffle, [842](#)
- FinishStuffle, [843](#)
- Finishuffle, [826](#)
- FinilTerm, [851](#)
- FlipTable, [987](#)
- FLUSHCONSOLE, [810](#)
- FlushFile, [902](#)
- FlushOut, [851](#)
- FlushSpectators, [1030](#)
- FORM_INLINE, [822](#)
- FreeNameTree, [897](#)
- FreeTableBase, [992](#)
- From0List, [904](#)
- FromList, [904](#)
- FromPolyRatFun, [1014](#)
- FromVarList, [905](#)

- FullCleanUp, [924](#)
- FullRenumber, [968](#)
- FullSymmetrize, [880](#)
- FunLevel, [852](#)
- FunMatchCy, [859](#)
- FunMatchSy, [859](#)
- GarbHand, [852](#)
- GCDclean, [1014](#)
- GCDfunction, [1013](#)
- GCDfunction3, [1013](#)
- GcdLong, [852](#)
- GCDterms, [1014](#)
- GenDiagrams, [841](#)
- GenerateFactors, [966](#)
- GenerateTopologies, [841](#)
- Generator, [853](#)
- GenLoops, [1035](#)
- GenPaths, [1036](#)
- GenTopologies, [840](#)
- GetAppendChannel, [903](#)
- GetAutoName, [895](#)
- GETBIDENTITY, [826](#)
- GetBinom, [854](#)
- GETCFROMEXTCHANNEL, [827](#)
- GetChannel, [903](#)
- GetChar, [909](#)
- GETCOEF, [807](#)
- GetContent, [982](#)
- getCurrentExternalChannel, [995](#)
- GetDbase, [990](#)
- GetDollar, [925](#)
- GetDollarNumber, [914](#)
- GetDolNum, [973](#)
- GetDoParam, [1012](#)
- GetFirstBracket, [982](#)
- GetFirstTerm, [982](#)
- GetFromSpectator, [1029](#)
- GetFromStore, [854](#)
- GetFromStream, [892](#)
- GetFunction, [895](#)
- GETIDENTITY, [826](#)
- GetIfDollarFactor, [1012](#)
- GetIfDollarNum, [844](#)
- GetInput, [909](#)
- GetLabel, [965](#)
- GetLastExprName, [895](#)
- GetLong, [854](#)
- GetLongModInverses, [873](#)
- GetModInverses, [872](#)
- GetMoreFromMem, [855](#)
- GetMoreTerms, [855](#)
- GetName, [894](#)
- GetNode, [894](#)
- GetNumber, [895](#)
- GetOName, [896](#)
- GetOneTerm, [855](#)
- GetPosFile, [902](#)
- GetPreVar, [907](#)
- GetRunningTime, [869](#)
- GetSetupPar, [908](#)
- GETSTOP, [807](#)
- GetStreamPosition, [930](#)
- GetTable, [855](#)
- GetTableName, [993](#)
- GETTERM, [827](#)
- GetTerm, [855](#)
- GetVar, [895](#)
- GetWildcardName, [929](#)
- Globalize, [929](#)
- Glue, [855](#)
- HighWarning, [890](#)
- HowMany, [988](#)
- iexp, [905](#)
- INCLENG, [807](#)
- Include, [913](#)
- InFunction, [856](#)
- inicbufs, [903](#)
- inictable, [903](#)
- IniFbuffer, [1013](#)
- IniLine, [857](#)
- INILOCK, [824](#)
- IniModule, [910](#)
- INIRWLOCK, [825](#)
- IniSpecialModule, [910](#)
- iniTools, [1005](#)
- initPresetExternalChannels, [994](#)
- InitRecovery, [1002](#)
- IniVars, [857](#)
- iniwranf, [997](#)
- InsertArg, [936](#)
- InsertTerm, [857](#)
- InsideDollar, [979](#)
- InsTableTree, [977](#)
- InsTree, [966](#)
- InvPoly, [1017](#)
- iranf, [997](#)
- ISEQUALPOS, [819](#)
- ISEQUALPOSINC, [817](#)
- IsExponentSign, [1026](#)
- ISGEPOS, [820](#)
- ISGEPOSINC, [817](#)
- IsIdStatement, [962](#)
- ISLESSPOS, [819](#)
- IsLikeVector, [906](#)
- ISMINPOS, [819](#)
- IsMultipleOf, [984](#)
- IsMultiplySign, [1027](#)
- ISNEGPOS, [820](#)
- ISNOTEQUALPOS, [819](#)
- ISNOTZEROPOS, [820](#)
- ISPOSPOS, [820](#)
- IsRHS, [962](#)
- IsSetMember, [984](#)
- ISZEROPOS, [820](#)
- LcmLong, [853](#)
- LinkTree, [896](#)

LoadInputFile, [909](#)
LoadInstruction, [911](#)
LoadModel, [1034](#)
LoadStatement, [911](#)
LocalConvertToPoly, [1010](#)
LocateBase, [877](#)
LocateFile, [893](#)
LOCK, [824](#)
LongCopy, [926](#)
LongLongCopy, [926](#)
LongToLine, [858](#)
LookInStream, [892](#)
LoopOutput, [1035](#)
LowerSortLevel, [978](#)
Lus, [968](#)
M_alloc, [826](#)
M_check1, [984](#)
M_free, [928](#)
M_print, [984](#)
MakeDate, [904](#)
MakeDirty, [858](#)
MakeDollarInteger, [972](#)
MakeDollarMod, [972](#)
MakeDubious, [895](#)
MakeGlobal, [924](#)
MakeInteger, [935](#)
MakeInverses, [872](#)
MakeLongRational, [976](#)
MakeMod, [935](#)
MakeModTable, [859](#)
MakeNameTree, [897](#)
MakeRational, [976](#)
MakeSetupAllocs, [981](#)
Malloc1, [891](#)
MarkDirty, [858](#)
MarkPolyRatFunDirty, [823](#)
MatchArgument, [859](#)
MatchCy, [859](#)
MatchE, [859](#)
MatchFunction, [860](#)
MatchIsPossible, [970](#)
MaX, [806](#)
MEMORYMACROS, [822](#)
MergeDotproductLists, [1016](#)
MergePatches, [860](#)
MergeSymbolLists, [1016](#)
MesCall, [926](#)
MesCerr, [861](#)
MesComp, [861](#)
MesNesting, [823](#)
MessPreNesting, [929](#)
MesWork, [926](#)
MiN, [806](#)
MLOCK, [825](#)
ModuleInstruction, [910](#)
Modulus, [861](#)
Moebius, [997](#)
MoveDummies, [861](#)
MULfunc, [1016](#)
MulLong, [861](#)
Mully, [862](#)
MULPOS, [818](#)
MulRat, [862](#)
MultDo, [862](#)
MultiplyToLine, [1027](#)
MultiplyWithTerm, [1015](#)
MUNLOCK, [826](#)
NameConflict, [900](#)
NCOPY, [809](#)
NCOPYB, [809](#)
NCOPYI, [809](#)
NCOPYI32, [810](#)
NeedNumber, [810](#)
NestingChecksum, [823](#)
NewDbase, [992](#)
NewSort, [862](#)
NEXTARG, [814](#)
NextFileIndex, [829](#)
NextPrime, [997](#)
Normalize, [863](#)
NormalModulus, [872](#)
NormPolyTerm, [1009](#)
NOTSTARTPOS, [819](#)
NumberFree, [823](#)
NumberMalloc, [822](#)
NumberMallocAddMemory, [1004](#)
numcommute, [968](#)
NumCopy, [926](#)
NumToStr, [922](#)
OpenAddFile, [900](#)
OpenBracketIndex, [985](#)
OpenDbase, [991](#)
openExternalChannel, [994](#)
OpenFile, [900](#)
OpenInput, [891](#)
OpenStream, [893](#)
OpenTemp, [863](#)
Optimize, [974](#)
optimize_print_code, [1025](#)
Pack, [864](#)
ParenthesesTest, [963](#)
ParseNumber, [808](#)
ParseSign, [809](#)
ParseSignedNumber, [809](#)
PasteFile, [864](#)
PasteTerm, [829](#)
PathOutput, [1036](#)
Permute, [864](#)
PermuteP, [865](#)
poly_div, [1018](#)
poly_factorize_argument, [1021](#)
poly_factorize_dollar, [1022](#)
poly_factorize_expression, [1022](#)
poly_free_poly_vars, [1024](#)
poly_gcd, [1017](#)
poly_inverse, [1019](#)

poly_mul, 1019
poly_ratfun_add, 1019
poly_ratfun_normalize, 1020
poly_rem, 1018
poly_unfactorize_expression, 1023
PolyDiv, 1014
PolyFunClean, 858
PolyFunDirty, 858
PolyFunMul, 865
PolyRatFunSpecial, 978
POPPREASSIGNLEVEL, 824
PopPreVars, 910
PopVariables, 866
PositionStream, 893
pParseObject, 923
PreCalc, 922
PreCmp, 922
PreEq, 922
PreEval, 922
PrelfDollarEval, 983
PrelfEval, 923
PreLoad, 923
PrepPoly, 866
PreProcessor, 904
PreProInstruction, 910
PreRandom, 998
PreSkip, 923
PREV, 816
PrintDeprecation, 869
PrintExtraSymbol, 1011
PrintRunningTime, 869
PrintSeq, 927
PrintSubTerm, 927
PrintSubtermList, 1011
PrintTerm, 927
PrintTermC, 927
PrintTime, 985
PrintWords, 927
ProcessOption, 893
Processor, 867
Product, 868
PrtLong, 868
PrtTerms, 868
PruneExtraSymbols, 1013
PUSHPREASSIGNLEVEL, 824
PutArgInScratch, 1007
PutBracket, 869
PutBracketInIndex, 985
PutExtraSymbols, 1015
PutIn, 869
PutInside, 863
PutInSpectator, 1029
PutInStore, 870
PutInVflags, 882
PutOut, 870
PutPreVar, 891
PutTableNames, 992
PutTermInDollar, 968
PUTZERO, 818
Quotient, 871
RaisPow, 871
RaisPowCached, 871
RaisPowMod, 872
RatioFind, 873
RatioGen, 873
RatToLine, 873
ReadFile, 901
ReadFromScratch, 1030
ReadFromStream, 892
ReadijObject, 991
ReadIndex, 989
ReadIniInfo, 990
ReadObject, 991
ReadParticle, 1033
ReadPolyRatFun, 1013
ReadPosFile, 901
ReadRange, 1007
ReadSaveExpression, 999
ReadSaveHeader, 998
ReadSaveIndex, 998
ReadSaveTerm32, 1000
ReadSaveVariables, 1001
ReadSnum, 874
RecalcSetups, 908
RecoveryFilename, 1003
REDLENG, 806
RedoTableTree, 977
RedoTree, 966
ReleaseTB, 996
Remain10, 874
Remain4, 874
RemoveDictionary, 1026
RemoveDollars, 988
ReNumber, 874
ReOpenFile, 900
ReplaceDollar, 897
ReserveTempFiles, 926
ResetScratch, 874
ResetVariables, 929
ResolveSet, 874
ReverseStatements, 893
RevertScratch, 875
ReWorkT, 844
RunAddArg, 1008
RunCycle, 1008
RunDecode, 1006
RunDedup, 1009
RunDropArg, 1009
RunEncode, 1006
RunExplode, 1007
RunHtoZArg, 1009
RunImplode, 1006
RunIsLyndon, 1008
RunMulArg, 1008
RunPermute, 1007
RunReplace, 1006

- RunReverse, [1008](#)
- RunSelectArg, [1009](#)
- RunToLyndon, [1008](#)
- RunTransform, [1006](#)
- RunZtoHArg, [1009](#)
- RWLOCKR, [825](#)
- RWLOCKW, [825](#)
- ScanFunctions, [875](#)
- SeekFile, [902](#)
- SeekScratch, [875](#)
- selectExternalChannel, [995](#)
- set_del, [994](#)
- set_in, [993](#)
- set_set, [993](#)
- set_sub, [994](#)
- SETBASELENGTH, [817](#)
- SETBASEPOSITION, [817](#)
- SetDictionaryOptions, [1026](#)
- SetEndHScratch, [875](#)
- SetEndScratch, [875](#)
- SETERROR, [816](#)
- SetExpr, [933](#)
- SetExprCases, [980](#)
- SetFileIndex, [875](#)
- SETKILLMODEFOREXTERNALCHANNEL, [827](#)
- SetMods, [889](#)
- setonoff, [933](#)
- SetPosFile, [902](#)
- SetScratch, [890](#)
- SetSpecialMode, [924](#)
- SETSTARTPOS, [819](#)
- SETTERMINATORFOREXTERNALCHANNEL, [827](#)
- Sflush, [876](#)
- SGN, [806](#)
- ShrinkDictionary, [1027](#)
- Shuffle, [842](#)
- simp1token, [963](#)
- simp2token, [963](#)
- simp3atoken, [963](#)
- simp3btoken, [964](#)
- simp4token, [964](#)
- simp5token, [964](#)
- simp6token, [964](#)
- SimpleSplitMerge, [979](#)
- SimpleSplitMergeRec, [979](#)
- Simplify, [876](#)
- simpwtoken, [963](#)
- SizeOfDollar, [983](#)
- SizeOfExpression, [983](#)
- SkipAName, [964](#)
- SKIPBLANKS, [810](#)
- SKIPBRA1, [811](#)
- SKIPBRA2, [811](#)
- SKIPBRA3, [811](#)
- SKIPBRA4, [811](#)
- SKIPBRA5, [811](#)
- SkipField, [906](#)
- SkipName, [1032](#)
- SortTheList, [969](#)
- SortWeights, [937](#)
- SortWild, [876](#)
- SpareTable, [890](#)
- SpecialCleanup, [889](#)
- SplitMerge, [877](#)
- StageSort, [928](#)
- StartFiles, [904](#)
- StartLoops, [1035](#)
- StartPrepro, [917](#)
- StartVariables, [828](#)
- StoreTerm, [878](#)
- str_dup, [989](#)
- StrCmp, [906](#)
- StrCopy, [830](#)
- strDup1, [890](#)
- StrHICmp, [907](#)
- StrICmp, [906](#)
- StrICont, [907](#)
- StrLen, [907](#)
- StudyPattern, [970](#)
- StuffAdd, [807](#)
- Stuffle, [843](#)
- StuffRootAdd, [843](#)
- SubPLon, [879](#)
- SubsInAll, [980](#)
- Substitute, [879](#)
- SwitchSplitMerge, [1031](#)
- SwitchSplitMergeRec, [1031](#)
- SymbolNormalize, [996](#)
- SymFind, [879](#)
- SymGen, [879](#)
- Symmetrize, [880](#)
- SynchFile, [902](#)
- TableReset, [844](#)
- TABSIZE, [815](#)
- TakeArgContent, [934](#)
- TakeContent, [1015](#)
- TakeDollarContent, [971](#)
- TakeExtraSymbols, [1015](#)
- TakeIDfunction, [981](#)
- TakeLongRoot, [976](#)
- TakeModulus, [880](#)
- TakeNormalModulus, [880](#)
- TakeRatRoot, [976](#)
- TakeSymbolContent, [1014](#)
- TalToLine, [880](#)
- TELLFILE, [828](#)
- TellFile, [902](#)
- TenVec, [881](#)
- TenVecFind, [881](#)
- TermAssign, [968](#)
- TermFree, [823](#)
- Terminate, [816](#)
- TerminatImpl, [894](#)
- TermMalloc, [822](#)
- TermMallocAddMemory, [1005](#)

- TermRenumber, 881
- TermsInBracket, 988
- TermsInDollar, 983
- TermsInExpression, 983
- TestArgNum, 1007
- TestDoLoop, 1017
- TestDrop, 881
- TestEndDoLoop, 1017
- TestFunFlag, 996
- TestMatch, 882
- TestName, 899
- TestPartitions, 840
- TestSelect, 980
- TestSub, 883
- TestTables, 964
- TestTerm, 1005
- TestUse, 843
- TheDefine, 912
- TheUndefine, 912
- TimeChildren, 883
- TimeCPU, 883
- TimeWallClock, 884
- ToFast, 908
- ToGeneral, 908
- tokenize, 963
- TOKENTOLINE, 808
- TokenToLine, 884
- TOLONG, 820
- ToPolyFunGeneral, 908
- ToStorage, 884
- ToToken, 925
- Trace4, 884
- Trace4Gen, 884
- Trace4no, 885
- TraceFind, 885
- TraceN, 885
- TraceNgen, 885
- TraceNno, 885
- Traces, 885
- TransferBuffer, 981
- TransformRational, 1027
- TranslateExpression, 983
- TreatPolyRatFun, 998
- Trick, 886
- TruncateFile, 903
- TryDo, 886
- TryEnvironment, 993
- TryFileSetups, 981
- TryRecover, 808
- TwoExprCompare, 984
- UngetChar, 808
- UngetFromStream, 808
- UNLOCK, 825
- UnPack, 886
- UNRWLOCK, 825
- UnsetAllowDelay, 910
- UnSetDictionary, 1026
- UnSetMods, 889
- UpdateMaxSize, 1011
- UpdatePositions, 984
- VARNAME, 816
- VarStore, 886
- WantAddLongs, 821
- WantAddPointers, 821
- WantAddPositions, 822
- Warning, 890
- WCOPY, 810
- WildDollars, 968
- WildFill, 886
- WORDDIF, 815
- wranf, 997
- WriteAll, 887
- WriteArgument, 887
- WRITEBUFTOEXTCHANNEL, 827
- WriteDictionary, 1027
- WriteDollarFactorToBuffer, 967
- WriteDollarToBuffer, 967
- WriteExpression, 887
- WRITEFILE, 827
- WriteFileToFile, 901
- WriteIndex, 990
- WriteIndexBlock, 989
- WriteIniInfo, 990
- WriteInnerTerm, 887
- WriteLists, 887
- WriteNamesBlock, 990
- WriteObject, 991
- WriteOne, 887
- WriteSetup, 888
- WriteStats, 888
- WriteStoreHeader, 1002
- WriteString, 921
- WriteSubTerm, 888
- WriteTerm, 889
- writeToChannel, 995
- WriteTokens, 963
- WriteUnfinString, 921
- WrtPower, 830
- wsizeof, 815
- ZEROARG, 813
- ZeroFillRange, 815
- DeclareVector
 - vector.h, 3244
- DECODEARG
 - ftypes.h, 1462
- DEDUPARG
 - ftypes.h, 1464
- defaultcase
 - SWITCH, 426
- DEFAULTFNAMLENGTH
 - startup.c, 2832
- DEFAULTPROCESSBUCKETSIZE
 - fsizes.h, 1362
- defaulttempfilename
 - startup.c, 2835
- DEFAULTTHREADBUCKETSIZE

- fsizes.h, [1363](#)
- DEFAULTTHREADLOADBALANCING
 - fsizes.h, [1363](#)
- DEFAULTTHREADS
 - fsizes.h, [1363](#)
- defaultv
 - OptDef, [292](#)
- DeferFlag
 - R_const, [380](#)
- Deferred
 - declare.h, [837](#)
 - proces.c, [2466](#)
- deferskipped
 - N_const, [254](#)
- defineChannel
 - declare.h, [995](#)
 - pre.c, [2363](#)
- defined
 - TaBIEs, [467](#)
- DEFINEVALUE
 - setfile.c, [2724](#)
- DEFINITION
 - ftypes.h, [1390](#)
- defpart
 - MInput, [219](#)
 - Model, [234](#)
- DefPosition
 - R_const, [376](#)
- deg
 - ANode, [13](#)
 - ENode, [117](#)
 - MNode, [221](#)
 - NCand, [270](#)
 - NStack, [278](#)
 - PNodeClass, [341](#)
 - T_ENode, [450](#)
 - T_MNode, [457](#)
- degree
 - poly, [350](#)
- degree_vector
 - poly, [354](#)
- DelayPrevar
 - P_const, [320](#)
- deleted
 - EEdge, [98](#)
- DeleteObject
 - declare.h, [991](#)
 - minos.c, [1762](#)
- DeleteRecoveryFile
 - checkpoint.c, [548](#)
 - declare.h, [1003](#)
- DeleteStore
 - declare.h, [838](#)
 - store.c, [2863](#)
- delGroup
 - SGroup, [392](#)
- DELTA
 - ftypes.h, [1406](#)
- DELTA2
 - ftypes.h, [1410](#)
- DELTA3
 - ftypes.h, [1408](#)
- deltaEuler
 - float.c, [1304](#)
- deltaEulerC
 - float.c, [1304](#)
- deltaMZV
 - float.c, [1304](#)
- DELTA_P
 - ftypes.h, [1410](#)
- den
 - Fraction, [141](#)
- DENOMINATOR
 - ftypes.h, [1406](#)
- DENOMINATORSYMBOL
 - ftypes.h, [1421](#)
- denomnum
 - M_const, [187](#)
- DENSETABLE
 - ftypes.h, [1471](#)
- DenToFunction
 - declare.h, [988](#)
 - wildcard.c, [3256](#)
- derivative
 - poly, [351](#)
- description
 - fixedset, [137](#)
- det
 - ECand, [95](#)
 - EStack, [119](#)
- DetCommu
 - declare.h, [835](#)
 - normal.c, [1906](#)
- DetCurDum
 - declare.h, [838](#)
 - reshuf.c, [2643](#)
- detEdge
 - Assign, [21](#)
- DetVars
 - declare.h, [838](#)
 - store.c, [2864](#)
- DGraph, [80](#)
 - edges, [81](#)
 - nedges, [81](#)
 - nnodes, [81](#)
 - nodes, [81](#)
- DIAGRAMS
 - ftypes.h, [1417](#)
- diagrams.c, [1057](#), [1058](#)
 - CoCanonicalize, [1057](#)
 - DoCanonicalize, [1057](#)
 - DoShattering, [1058](#)
 - DoTopologyCanonicalize, [1058](#)
- diaoffset
 - TERMINFO, [472](#)
- diawrap.cc, [1067](#), [1070](#)

- ConvertParticle, [1068](#)
- fendMG, [1069](#)
- GenDiagrams, [1069](#)
- GenTopologies, [1069](#)
- LoadModel, [1068](#)
- MAXPOINTS, [1068](#)
- numParticle, [1068](#)
- ProcessTopology, [1069](#)
- ReConvertParticle, [1068](#)
- SetDualOpts, [1069](#)
- TOPO_MAXVERT, [1068](#)
- dict.c, [1083](#), [1087](#)
 - AddDictionary, [1085](#)
 - AddToDictionary, [1085](#)
 - DictFromBytes, [1087](#)
 - DictToBytes, [1087](#)
 - DoPreAdd, [1087](#)
 - DoPreCloseDictionary, [1086](#)
 - DoPreOpenDictionary, [1086](#)
 - DoPreUseDictionary, [1086](#)
 - FindDictionary, [1085](#)
 - FindExtraSymbol, [1085](#)
 - FindFunction, [1085](#)
 - FindFunWithArgs, [1085](#)
 - FindIndex, [1084](#)
 - FindSymbol, [1084](#)
 - FindVector, [1084](#)
 - IsExponentSign, [1084](#)
 - IsMultiplySign, [1084](#)
 - RemoveDictionary, [1086](#)
 - SetDictionaryOptions, [1086](#)
 - ShrinkDictionary, [1086](#)
 - TransformRational, [1084](#)
 - UnSetDictionary, [1086](#)
 - UseDictionary, [1085](#)
- DICT_ALLNUMBERS
 - ftypes.h, [1468](#)
- DICT_DOFUNWITHARGS
 - ftypes.h, [1469](#)
- DICT_DOSPECIALS
 - ftypes.h, [1468](#)
- DICT_DOVARIABLES
 - ftypes.h, [1468](#)
- DICT_FUNCTION
 - ftypes.h, [1470](#)
- DICT_FUNCTION_WITH_ARGUMENTS
 - ftypes.h, [1470](#)
- DICT_INDEX
 - ftypes.h, [1470](#)
- DICT_INDOLLARS
 - ftypes.h, [1469](#)
- DICT_INTEGERNUMBER
 - ftypes.h, [1469](#)
- DICT_INTEGERONLY
 - ftypes.h, [1468](#)
- DICT_NOFUNWITHARGS
 - ftypes.h, [1469](#)
- DICT_NONUMBERS
 - ftypes.h, [1468](#)
- DICT_NOSPECIALS
 - ftypes.h, [1468](#)
- DICT_NOTINDOLLARS
 - ftypes.h, [1469](#)
- DICT_NOVARIABLES
 - ftypes.h, [1468](#)
- DICT_RANGE
 - ftypes.h, [1470](#)
- DICT_RATIONALNUMBER
 - ftypes.h, [1469](#)
- DICT_RATIONALONLY
 - ftypes.h, [1468](#)
- DICT_SPECIALCHARACTER
 - ftypes.h, [1470](#)
- DICT_SYMBOL
 - ftypes.h, [1469](#)
- DICT_VECTOR
 - ftypes.h, [1469](#)
- DictFromBytes
 - declare.h, [1028](#)
 - dict.c, [1087](#)
- Dictionaries
 - O_const, [284](#)
- DICTIONARY, [81](#)
 - characters, [83](#)
 - elements, [82](#)
 - funwith, [83](#)
 - gnumelements, [83](#)
 - name, [82](#)
 - numbers, [82](#)
 - numelements, [82](#)
 - ranges, [83](#)
 - sizeelements, [82](#)
 - variables, [82](#)
- DICTIONARY_ELEMENT, [83](#)
 - lhs, [84](#)
 - rhs, [84](#)
 - size, [84](#)
 - type, [84](#)
- DictToBytes
 - declare.h, [1028](#)
 - dict.c, [1087](#)
- DidClean
 - C_const, [67](#)
- DIFBASE
 - declare.h, [818](#)
- DIFPOS
 - declare.h, [818](#)
- dimension
 - CbUf, [73](#)
 - fixedset, [137](#)
 - FuNcTiOn, [146](#)
 - InDeX, [150](#)
 - SeTs, [389](#)
 - SyMbOl, [430](#)
 - VeCtOr, [489](#)
- DimensionExpression

- declare.h, [837](#)
- reshuf.c, [2644](#)
- DimensionSubterm
 - declare.h, [837](#)
 - reshuf.c, [2644](#)
- DIMENSIONSYMBOL
 - ftypes.h, [1421](#)
- DimensionTerm
 - declare.h, [837](#)
 - reshuf.c, [2644](#)
- dir
 - EEdge, [100](#)
- dirEdge
 - EGraph, [107](#)
- DirtPow
 - C_const, [66](#)
- DIRTYFLAG
 - ftypes.h, [1436](#)
- dirtyflag
 - FiLeDaTa, [132](#)
- DIRTYSYMFLAG
 - ftypes.h, [1436](#)
- discardDisc
 - MGraph, [215](#)
 - T_MGraph, [455](#)
- discardIso
 - MGraph, [215](#)
 - T_MGraph, [456](#)
- discardOrd
 - T_MGraph, [455](#)
- discardRefine
 - MGraph, [215](#)
 - T_MGraph, [455](#)
- DisOrderFlag
 - N_const, [259](#)
- DISTRIBUTE
 - structs.h, [2937](#)
- DiStRiBuTe, [84](#)
 - cycle, [86](#)
 - n, [85](#)
 - n1, [85](#)
 - n2, [85](#)
 - obj1, [85](#)
 - obj2, [85](#)
 - out, [85](#)
 - sign, [85](#)
- Distribute
 - declare.h, [839](#)
 - symmetr.c, [2964](#)
- DISTRIBUTION
 - ftypes.h, [1408](#)
- DistrN
 - declare.h, [1032](#)
 - tools.c, [3126](#)
- div
 - COST, [76](#)
 - poly, [355](#)
- DivFloats
 - float.c, [1302](#)
- DIVFUNCTION
 - ftypes.h, [1412](#)
- Divfunction
 - declare.h, [1016](#)
 - ratio.c, [2540](#)
- divides
 - poly, [356](#)
- DivLong
 - declare.h, [839](#)
 - reken.c, [2589](#)
- DivLong_fix_args
 - optimize.cc, [2025](#)
- divmod
 - poly, [356](#)
- divmod_heap
 - poly, [359](#)
- divmod_mpoly
 - flintinterface.h, [1284](#)
- divmod_one_term
 - poly, [358](#)
- divmod_poly
 - flintinterface.h, [1284](#)
- divmod_univar
 - poly, [358](#)
- DIVPOS
 - declare.h, [817](#)
- DivRat
 - declare.h, [839](#)
 - reken.c, [2587](#)
- divrem
 - ratio.c, [2541](#)
- Divvy
 - declare.h, [839](#)
 - reken.c, [2586](#)
- DNode, [86](#)
 - extloop, [86](#)
 - intrct, [86](#)
- do_optimization
 - optimize.cc, [2032](#)
- DO_UFFLE
 - structs.h, [2936](#)
- do_uffle
 - SHvariables, [396](#)
- DOALL
 - ftypes.h, [1467](#)
- DoArgPlode
 - compcomm.c, [633](#)
 - declare.h, [939](#)
- DoArgument
 - compcomm.c, [624](#)
 - declare.h, [934](#)
- DoBrackets
 - compcomm.c, [630](#)
 - declare.h, [938](#)
- DoBreakDo
 - declare.h, [919](#)
 - pre.c, [2355](#)

- DoCall
 - declare.h, [918](#)
 - pre.c, [2354](#)
- DoCanonicalize
 - declare.h, [840](#)
 - diagrams.c, [1057](#)
- DoChain
 - compcomm.c, [628](#)
 - declare.h, [958](#)
- DoCheckpoint
 - checkpoint.c, [550](#)
 - declare.h, [1004](#)
- DoClearOptimize
 - declare.h, [915](#)
 - pre.c, [2364](#)
- DoClearUserFlag
 - declare.h, [1033](#)
 - pre.c, [2366](#)
- DoCommentChar
 - declare.h, [921](#)
 - pre.c, [2353](#)
- DoContinueDo
 - declare.h, [919](#)
 - pre.c, [2355](#)
- DoDebug
 - declare.h, [919](#)
 - pre.c, [2355](#)
- DoDefine
 - declare.h, [911](#)
 - pre.c, [2353](#)
- DoDelta
 - declare.h, [839](#)
 - normal.c, [1906](#)
- DoDelta3
 - declare.h, [840](#)
 - reshuf.c, [2645](#)
- DoDimension
 - declare.h, [898](#)
 - names.c, [1861](#)
- DoDistrib
 - declare.h, [842](#)
 - reshuf.c, [2645](#)
- DoDo
 - declare.h, [919](#)
 - pre.c, [2355](#)
- DODOUBLE
 - tools.c, [3110](#)
- DoElements
 - declare.h, [899](#)
 - names.c, [1864](#)
- DoElse
 - declare.h, [918](#)
 - pre.c, [2355](#)
- DoElseif
 - declare.h, [918](#)
 - pre.c, [2356](#)
- DoEnddo
 - declare.h, [919](#)
- pre.c, [2356](#)
- DoEndif
 - declare.h, [918](#)
 - pre.c, [2356](#)
- DoEndInside
 - declare.h, [920](#)
 - pre.c, [2357](#)
- DoEndNamespace
 - declare.h, [1032](#)
 - pre.c, [2365](#)
- DoEndprocedure
 - declare.h, [919](#)
 - pre.c, [2356](#)
- DoEndSwitch
 - declare.h, [1031](#)
 - if.c, [1684](#)
- DoesCommu
 - declare.h, [835](#)
 - normal.c, [1906](#)
- DOESNOTCOMMUTE
 - ftypes.h, [1467](#)
- DoExecStatement
 - declare.h, [925](#)
 - module.c, [1796](#)
- DoExecute
 - declare.h, [890](#)
 - execute.c, [1171](#)
- DOEXPAND
 - tools.c, [3110](#)
- DoExpr
 - comexpr.c, [588](#)
 - declare.h, [965](#)
- DoExternal
 - declare.h, [913](#)
 - pre.c, [2362](#)
- DoFactDollar
 - declare.h, [914](#)
 - pre.c, [2363](#)
- DoFactorize
 - compcomm.c, [636](#)
 - declare.h, [945](#)
- DoFindLoop
 - compcomm.c, [631](#)
 - declare.h, [969](#)
- DoFromExternal
 - declare.h, [913](#)
 - pre.c, [2363](#)
- Dolf
 - declare.h, [918](#)
 - pre.c, [2356](#)
- Dolfdef
 - declare.h, [917](#)
 - pre.c, [2356](#)
- Dolfndef
 - declare.h, [918](#)
 - pre.c, [2357](#)
- DolfStatement
 - declare.h, [845](#)

- if.c, [1684](#)
- Dofydef
 - declare.h, [917](#)
 - pre.c, [2356](#)
- DoInclude
 - declare.h, [913](#)
 - pre.c, [2354](#)
- DoInParallel
 - compcomm.c, [628](#)
 - declare.h, [940](#)
- DoinParallel
 - declare.h, [986](#)
 - module.c, [1795](#)
- DoInside
 - declare.h, [920](#)
 - pre.c, [2357](#)
- DOLARGUMENT
 - ftypes.h, [1455](#)
- DOLINDEX
 - ftypes.h, [1456](#)
- dollar
 - ARGBUFFER, [14](#)
- dollar.c, [1101](#), [1111](#)
 - AddPotModdollar, [1110](#)
 - AddToDollarBuffer, [1103](#)
 - AssignDollar, [1102](#)
 - CatchDollar, [1102](#)
 - CleanDollarFactors, [1108](#)
 - DollarFactorize, [1107](#)
 - DollarRaiseLow, [1106](#)
 - DolToFunction, [1104](#)
 - DolToIndex, [1104](#)
 - DolToLong, [1104](#)
 - DolToNumber, [1104](#)
 - DolToSymbol, [1104](#)
 - DolToTensor, [1103](#)
 - DolToTerms, [1104](#)
 - DolToVector, [1104](#)
 - EvalDoLoopArg, [1106](#)
 - ExchangeDollars, [1105](#)
 - ExecInside, [1105](#)
 - GetDolNum, [1110](#)
 - InsideDollar, [1105](#)
 - IsMultipleOf, [1106](#)
 - IsSetMember, [1106](#)
 - MakeDollarInteger, [1108](#)
 - MakeDollarMod, [1109](#)
 - PrefDollarEval, [1105](#)
 - PutTermInDollar, [1103](#)
 - SizeOfDollar, [1105](#)
 - STEP2, [1102](#)
 - TakeDollarContent, [1108](#)
 - TermAssign, [1103](#)
 - TermsInDollar, [1105](#)
 - TestDoLoop, [1107](#)
 - TestEndDoLoop, [1107](#)
 - TranslateExpression, [1106](#)
 - TwoExprCompare, [1106](#)
 - WildDollars, [1103](#)
 - WriteDollarFactorToBuffer, [1103](#)
 - WriteDollarToBuffer, [1102](#)
- dollar_buf, [87](#)
- DOLLAREXP2
 - ftypes.h, [1405](#)
- DOLLAREXPRESSION
 - ftypes.h, [1405](#)
- DollarFactorize
 - declare.h, [971](#)
 - dollar.c, [1107](#)
- DOLLARFLAG
 - ftypes.h, [1450](#)
- DollarInOutBuffer
 - O_const, [285](#)
- DollarList
 - P_const, [316](#)
- DOLLARNAME
 - declare.h, [816](#)
- dollarname
 - DoLoOp, [91](#)
- DOLLARNAMES
 - ftypes.h, [1461](#)
- dollarname
 - C_const, [42](#)
- DollarOutBuffer
 - O_const, [282](#)
- DollarOutSizeBuffer
 - O_const, [285](#)
- DollarRaiseLow
 - declare.h, [898](#)
 - dollar.c, [1106](#)
- DoLIARs, [87](#)
 - factors, [88](#)
 - index, [88](#)
 - name, [88](#)
 - nfactors, [89](#)
 - node, [88](#)
 - numdummies, [89](#)
 - size, [88](#)
 - type, [88](#)
 - where, [88](#)
 - zero, [88](#)
- Dollars
 - variable.h, [3236](#)
- DOLLARSTREAM
 - ftypes.h, [1382](#)
- dollarzero
 - M_const, [189](#)
- DOLNUMBER
 - ftypes.h, [1455](#)
- DOLOOP
 - structs.h, [2935](#)
- DoLoOp, [89](#)
 - contents, [91](#)
 - dollarname, [91](#)
 - errorsinloop, [92](#)
 - firstdollar, [92](#)

- firstloopcall, [92](#)
- firstnum, [91](#)
- incdollar, [92](#)
- incnum, [91](#)
- lastdollar, [92](#)
- lastnum, [91](#)
- name, [90](#)
- NoShowInput, [92](#)
- NumPreTypes, [92](#)
- p, [90](#)
- PrefLevel, [92](#)
- PreSwitchLevel, [93](#)
- startlinenumber, [91](#)
- type, [91](#)
- vars, [90](#)
- dolooplevel
 - C_const, [62](#)
- doloopnest
 - C_const, [51](#)
- DoLoops
 - variable.h, [3232](#)
- doloopstack
 - C_const, [51](#)
- doloopstacksize
 - C_const, [62](#)
- DOLSUBTERM
 - ftypes.h, [1455](#)
- DOLTERMS
 - ftypes.h, [1456](#)
- DolToFunction
 - declare.h, [970](#)
 - dollar.c, [1104](#)
- DolToIndex
 - declare.h, [971](#)
 - dollar.c, [1104](#)
- DolToLong
 - declare.h, [971](#)
 - dollar.c, [1104](#)
- DolToNumber
 - declare.h, [970](#)
 - dollar.c, [1104](#)
- DolToSymbol
 - declare.h, [970](#)
 - dollar.c, [1104](#)
- DolToTensor
 - declare.h, [970](#)
 - dollar.c, [1103](#)
- DolToTerms
 - declare.h, [979](#)
 - dollar.c, [1104](#)
- DolToVector
 - declare.h, [970](#)
 - dollar.c, [1104](#)
- DOLUNDEFINED
 - ftypes.h, [1455](#)
- DOLWILDARGS
 - ftypes.h, [1456](#)
- DOLZERO
 - ftypes.h, [1456](#)
- DoMessage
 - declare.h, [915](#)
 - pre.c, [2357](#)
- DoModDollar
 - declare.h, [986](#)
 - module.c, [1795](#)
- DoModLocal
 - declare.h, [986](#)
 - module.c, [1795](#)
- DoModMax
 - declare.h, [986](#)
 - module.c, [1795](#)
- DoModMin
 - declare.h, [986](#)
 - module.c, [1795](#)
- DoModSum
 - declare.h, [986](#)
 - module.c, [1794](#)
- DoNamespace
 - declare.h, [1032](#)
 - pre.c, [2365](#)
- DONE
 - proces.c, [2458](#)
- DoNoParallel
 - declare.h, [985](#)
 - module.c, [1794](#)
- DonotinParallel
 - declare.h, [987](#)
 - module.c, [1795](#)
- DoOnePow
 - declare.h, [845](#)
 - proces.c, [2465](#)
- DoOptimize
 - declare.h, [915](#)
 - pre.c, [2364](#)
- DoParallel
 - declare.h, [985](#)
 - module.c, [1794](#)
- DoPartitions
 - declare.h, [840](#)
 - reshuf.c, [2645](#)
- DoPermutations
 - declare.h, [842](#)
 - reshuf.c, [2646](#)
- DoPipe
 - declare.h, [917](#)
 - pre.c, [2357](#)
- DoPipeStatement
 - declare.h, [925](#)
 - module.c, [1796](#)
- DoPolyfun
 - declare.h, [925](#)
 - module.c, [1794](#)
- DoPolyratfun
 - declare.h, [925](#)
 - module.c, [1794](#)
- DoPrcExtension

- declare.h, [921](#)
- pre.c, [2357](#)
- DoPreAdd
 - declare.h, [1025](#)
 - dict.c, [1087](#)
- DoPreAddSeparator
 - declare.h, [994](#)
 - pre.c, [2362](#)
- DoPreAppend
 - declare.h, [915](#)
 - pre.c, [2358](#)
- DoPreAppendPath
 - declare.h, [1030](#)
 - pre.c, [2364](#)
- DoPreAssign
 - declare.h, [916](#)
 - pre.c, [2353](#)
- DoPreBreak
 - declare.h, [916](#)
 - pre.c, [2359](#)
- DoPreCase
 - declare.h, [916](#)
 - pre.c, [2359](#)
- DoPreClose
 - declare.h, [920](#)
 - pre.c, [2358](#)
- DoPreCloseDictionary
 - declare.h, [1025](#)
 - dict.c, [1086](#)
- DoPreCreate
 - declare.h, [916](#)
 - pre.c, [2358](#)
- DoPreDefault
 - declare.h, [916](#)
 - pre.c, [2359](#)
- DoPreEndSwitch
 - declare.h, [916](#)
 - pre.c, [2359](#)
- DoPreExchange
 - declare.h, [917](#)
 - pre.c, [2354](#)
- DoPreOpenDictionary
 - declare.h, [1025](#)
 - dict.c, [1086](#)
- DoPreOut
 - declare.h, [915](#)
 - pre.c, [2357](#)
- DoPrePrependPath
 - declare.h, [1030](#)
 - pre.c, [2365](#)
- DoPrePrintTimes
 - declare.h, [920](#)
 - pre.c, [2358](#)
- DoPreRemove
 - declare.h, [920](#)
 - pre.c, [2358](#)
- DoPreReset
 - declare.h, [921](#)
- pre.c, [2364](#)
- DoPreRmSeparator
 - declare.h, [994](#)
 - pre.c, [2362](#)
- DoPreShow
 - declare.h, [917](#)
 - pre.c, [2359](#)
- DoPreSortReallocate
 - declare.h, [921](#)
 - pre.c, [2358](#)
- DoPreSwitch
 - declare.h, [916](#)
 - pre.c, [2359](#)
- DoPreUseDictionary
 - declare.h, [1025](#)
 - dict.c, [1086](#)
- DoPreWrite
 - declare.h, [920](#)
 - pre.c, [2358](#)
- DoPrint
 - compcomm.c, [620](#)
 - declare.h, [933](#)
- DoProcedure
 - declare.h, [920](#)
 - pre.c, [2359](#)
- DoProcessBucket
 - declare.h, [986](#)
 - module.c, [1795](#)
- DoPrompt
 - declare.h, [914](#)
 - pre.c, [2362](#)
- DoPutInside
 - compcomm.c, [637](#)
 - declare.h, [938](#)
- DoRecovery
 - checkpoint.c, [549](#)
 - declare.h, [1003](#)
- DoRedefine
 - declare.h, [911](#)
 - pre.c, [2353](#)
- DoReverseInclude
 - declare.h, [913](#)
 - pre.c, [2354](#)
- DoRevert
 - declare.h, [846](#)
 - normal.c, [1906](#)
- DoRmExternal
 - declare.h, [914](#)
 - pre.c, [2363](#)
- DoSetExternal
 - declare.h, [914](#)
 - pre.c, [2362](#)
- DoSetExternalAttr
 - declare.h, [914](#)
 - pre.c, [2363](#)
- DoSetRandom
 - declare.h, [914](#)
 - pre.c, [2364](#)

- DoSetups
 - declare.h, [894](#)
 - setfile.c, [2724](#)
- DoSetUserFlag
 - declare.h, [1033](#)
 - pre.c, [2366](#)
- DoShattering
 - declare.h, [841](#)
 - diagrams.c, [1058](#)
- DoShtuffle
 - declare.h, [826](#)
- DoShuffle
 - declare.h, [842](#)
 - reshuf.c, [2646](#)
- DoSkipExtraSymbols
 - declare.h, [915](#)
 - pre.c, [2364](#)
- DoStuffle
 - declare.h, [842](#)
 - reshuf.c, [2646](#)
- DoSumF1
 - declare.h, [846](#)
 - ratio.c, [2536](#)
- DoSumF2
 - declare.h, [846](#)
 - ratio.c, [2536](#)
- DoSwitch
 - declare.h, [1031](#)
 - if.c, [1684](#)
- DoSymmetrize
 - compcomm.c, [625](#)
 - declare.h, [934](#)
- DoSystem
 - declare.h, [917](#)
 - pre.c, [2360](#)
- DoTable
 - declare.h, [956](#)
 - names.c, [1863](#)
- DoTableExpansion
 - declare.h, [841](#)
 - tables.c, [2993](#)
- DoTail
 - declare.h, [891](#)
 - startup.c, [2832](#)
- dotchar
 - setfile.c, [2726](#)
- DoTempSet
 - declare.h, [899](#)
 - names.c, [1864](#)
- DoTerminate
 - declare.h, [918](#)
 - pre.c, [2355](#)
- DoTheta
 - declare.h, [847](#)
 - normal.c, [1906](#)
- DoTimeOutAfter
 - declare.h, [915](#)
 - pre.c, [2365](#)
- DoToExternal
 - declare.h, [913](#)
 - pre.c, [2363](#)
- DoTopologyCanonicalize
 - declare.h, [841](#)
 - diagrams.c, [1058](#)
- DOTPBIT
 - ftypes.h, [1454](#)
- DOTPRODUCT
 - ftypes.h, [1404](#)
- DoubleBuffer
 - declare.h, [905](#)
 - tools.c, [3122](#)
- DoubleCbuffer
 - comtool.c, [771](#)
 - declare.h, [930](#)
- DoubleFlag
 - O_const, [288](#)
- DOUBLEFORTRANMODE
 - ftypes.h, [1401](#)
- DoubleIfBuffers
 - declare.h, [933](#)
 - if.c, [1684](#)
- DoubleList
 - declare.h, [905](#)
 - tools.c, [3122](#)
- DoubleLLList
 - declare.h, [905](#)
 - tools.c, [3122](#)
- DOUBLEPRECISIONFLAG
 - ftypes.h, [1401](#)
- DoubleSwitchBuffers
 - declare.h, [1031](#)
 - if.c, [1685](#)
- DoubleTable
 - float.c, [1303](#)
- DoUndefine
 - declare.h, [913](#)
 - pre.c, [2354](#)
- DoUse
 - declare.h, [1032](#)
 - pre.c, [2366](#)
- DROP
 - ftypes.h, [1437](#)
- DROPARG
 - ftypes.h, [1463](#)
- DropCoefficient
 - declare.h, [863](#)
 - normal.c, [1907](#)
- DROPGEXPRESSION
 - ftypes.h, [1438](#)
- DROPHGEXPRESSION
 - ftypes.h, [1439](#)
- DROPHLEXPRESSION
 - ftypes.h, [1439](#)
- DROPLEXPRESSION
 - ftypes.h, [1438](#)
- DROPPEDEXPRESSION

- ftypes.h, [1438](#)
- DROPSPECTATOREXPRESSON
 - ftypes.h, [1440](#)
- DropSymbols
 - declare.h, [863](#)
 - normal.c, [1907](#)
- DuBiOuS, [93](#)
 - dummy, [93](#)
 - name, [93](#)
 - node, [93](#)
- Dubious
 - variable.h, [3236](#)
- DubiousList
 - C_const, [43](#)
- DumFound
 - N_const, [250](#)
- DUMFUN
 - ftypes.h, [1408](#)
- DumFunPlace
 - N_const, [250](#)
- DumInd
 - M_const, [184](#)
- DUMMY
 - ftypes.h, [1453](#)
- dummy
 - ARGBUFFER, [15](#)
 - BracketInfo, [34](#)
 - DuBiOuS, [93](#)
 - MoDeL, [237](#)
- DUMMYBUFFER
 - ftypes.h, [1461](#)
- DUMMYFLAG
 - ftypes.h, [1445](#)
- DUMMYFUN
 - ftypes.h, [1408](#)
- DUMMYINDEX_
 - ftypes.h, [1444](#)
- DUMMYPADDING
 - AEdge, [8](#)
 - EEdge, [100](#)
 - EGraph, [113](#)
 - ENode, [118](#)
 - MCBlock, [193](#)
 - MCEdge, [196](#)
 - MConn, [203](#)
 - MCOpi, [205](#)
 - OptDef, [292](#)
 - Options, [307](#)
 - SProcess, [414](#)
- DUMMYPADDING1
 - EGraph, [114](#)
 - MGraph, [216](#)
- DUMMYPADDING2
 - MGraph, [217](#)
- dummyrenumlist
 - N_const, [251](#)
- dummysubexp
 - T_const, [441](#)
- DUMMYTEN
 - ftypes.h, [1408](#)
- DUMMYUSE
 - declare.h, [816](#)
- DumNum
 - C_const, [65](#)
- dumnumflag
 - C_const, [59](#)
- DUMPINTERMS
 - ftypes.h, [1387](#)
- DumPlace
 - N_const, [250](#)
- DumpNode
 - declare.h, [896](#)
 - names.c, [1859](#)
- DUMPOUTTERMS
 - ftypes.h, [1387](#)
- DUMPTOCOMPILER
 - ftypes.h, [1387](#)
- DUMPTOPARALLEL
 - ftypes.h, [1387](#)
- DUMPTOSORT
 - ftypes.h, [1387](#)
- DumpTree
 - declare.h, [896](#)
 - names.c, [1859](#)
- e
 - bufIPstruct, [37](#)
- e3
 - TrAcEs, [480](#)
- e4
 - TrAcEs, [480](#)
- eat
 - P_const, [321](#)
- EATTENSOR
 - ftypes.h, [1435](#)
- ebufnum
 - T_const, [438](#)
- ECand, [94](#)
 - ~ECand, [94](#)
 - det, [95](#)
 - ECand, [94](#)
 - nplist, [95](#)
 - plist, [95](#)
 - prECand, [95](#)
- eclass
 - SGroup, [393](#)
- econn
 - EGraph, [109](#)
- EDGE
 - ftypes.h, [1418](#)
- edgen
 - EStack, [119](#)
- edges
 - Assign, [26](#)
 - DGraph, [81](#)
 - EGraph, [110](#)
 - ENode, [117](#)

- MCBlock, [193](#)
- T_EGraph, [449](#)
- T_ENode, [450](#)
- edgeSym
 - Assign, [22](#)
- edtype
 - EEdge, [100](#)
- EEdge, [95](#)
 - ~EEdge, [96](#)
 - conid, [99](#)
 - copy, [97](#)
 - cut, [99](#)
 - deleted, [98](#)
 - dir, [100](#)
 - DUMMYPADDING, [100](#)
 - edtype, [100](#)
 - EEdge, [96](#)
 - egraph, [98](#)
 - emom, [99](#)
 - ext, [98](#)
 - extMom, [99](#)
 - id, [98](#)
 - lmom, [99](#)
 - momdir, [99](#)
 - momset, [99](#)
 - nlegs, [98](#)
 - nodes, [98](#)
 - opicomp, [100](#)
 - print, [97](#)
 - ptcl, [98](#)
 - setEMom, [97](#)
 - setId, [97](#)
 - setLMom, [97](#)
 - setType, [97](#)
 - visited, [99](#)
- eers
 - TrAcEs, [480](#)
- EESYMBOL
 - ftypes.h, [1421](#)
- EFLine, [100](#)
 - EFLine, [101](#)
 - elist, [101](#)
 - fkind, [101](#)
 - ftype, [101](#)
 - nlist, [101](#)
 - print, [101](#)
- EGraph, [102](#)
 - ~EGraph, [104](#)
 - addFLine, [108](#)
 - ald, [110](#)
 - assigned, [110](#)
 - bconn, [113](#)
 - biconnE, [106](#)
 - bicount, [114](#)
 - bidef, [113](#)
 - biinitE, [106](#)
 - biLow, [113](#)
 - bisearchE, [107](#)
 - chkMomConsv, [108](#)
 - cmpMom, [107](#)
 - connComp, [106](#)
 - connVisit, [106](#)
 - copy, [104](#)
 - dirEdge, [107](#)
 - DUMMYPADDING, [113](#)
 - DUMMYPADDING1, [114](#)
 - econn, [109](#)
 - edges, [110](#)
 - EGraph, [104](#)
 - endSetExtLoop, [106](#)
 - esym, [111](#)
 - extMom, [113](#)
 - extMomConsv, [107](#)
 - extperm, [111](#)
 - findRoot, [107](#)
 - flines, [114](#)
 - fltrace, [108](#)
 - fromDGraph, [105](#)
 - fromMGraph, [105](#)
 - fsign, [110](#)
 - getFLines, [108](#)
 - groupLMom, [107](#)
 - gSubId, [110](#)
 - isExternal, [105](#)
 - isFermion, [106](#)
 - isOptE, [105](#)
 - legParticle, [108](#)
 - loopm, [114](#)
 - maxdeg, [112](#)
 - mgraph, [109](#)
 - mId, [110](#)
 - model, [109](#)
 - multp, [111](#)
 - nadj2ptv, [113](#)
 - nEdges, [112](#)
 - nExtern, [112](#)
 - nFlines, [114](#)
 - nLoops, [112](#)
 - nNodes, [112](#)
 - nodes, [109](#)
 - nopi2p, [113](#)
 - nopicomp, [112](#)
 - nsym, [110](#)
 - nsym1, [111](#)
 - opi2plp, [113](#)
 - opiCount, [114](#)
 - opt, [109](#)
 - optQGrafA, [105](#)
 - optQGrafM, [105](#)
 - pld, [111](#)
 - prFLines, [108](#)
 - print, [104](#)
 - printPy, [104](#)
 - proc, [109](#)
 - sEdges, [111](#)
 - setExtern, [105](#)

- setExtLoop, 106
- sld, 110
- sLoops, 112
- sMaxdeg, 111
- sNodes, 111
- sproc, 109
- totalc, 112
- egraph
 - Assign, 23
 - EEdge, 98
 - ENode, 117
 - MGraph, 213
 - SProcess, 412
 - T_MGraph, 455
- elem
 - SGroup, 393
- element
 - objects, 291
- ELEMENTLOADED
 - ftypes.h, 1459
- elements
 - DICTIONARY, 82
- ELEMENTUSED
 - ftypes.h, 1459
- elist
 - EFLine, 101
- emom
 - EEdge, 99
- empty
 - FileInDeX, 133
- EMPTYINDEX
 - ftypes.h, 1445
- EMPTYININDEX
 - structs.h, 2932
- emptystring
 - startup.c, 2835
- EmptyTable
 - declare.h, 957
 - names.c, 1863
- EMSYMBOL
 - ftypes.h, 1421
- ENCODEARG
 - ftypes.h, 1462
- END
 - ftypes.h, 1454
- end
 - Options, 304
- endAGraph
 - SProcess, 410
- endianness
 - STOREHEADER, 418
- endmg
 - Options, 306
- endMGraph
 - SProcess, 410
- ENDMODULE
 - ftypes.h, 1384
- EndNest
 - N_const, 248
- ENDOFINPUT
 - ftypes.h, 1382
- ENDOFSTREAM
 - ftypes.h, 1382
- EndOfToken
 - declare.h, 924
 - tools.c, 3118
- endoftokens
 - C_const, 50
- endProc
 - Options, 304
- endSetExtern
 - T_EGraph, 448
- endSetExtLoop
 - EGraph, 106
- EndSort
 - declare.h, 847
 - sort.c, 2751
- endSubProc
 - Options, 304
- endswitch
 - SWITCH, 427
- EndTable
 - float.c, 1304
- ENode, 115
 - ~ENode, 116
 - copy, 116
 - deg, 117
 - DUMMYPADDING, 118
 - edges, 117
 - egraph, 117
 - ENode, 116
 - extloop, 118
 - id, 117
 - initAss, 116
 - intrct, 118
 - klow, 118
 - maxdeg, 117
 - ndtype, 118
 - print, 117
 - setExtern, 116
 - setId, 116
 - setType, 117
 - visited, 118
- entriesinindex
 - iniinfo, 155
- EntVar
 - declare.h, 848
 - names.c, 1858
- EpfCon
 - declare.h, 848
 - opera.c, 1988
- EpfFind
 - declare.h, 848
 - opera.c, 1988
- EpfGen
 - declare.h, 848

- opera.c, 1988
- eqnidxs
 - optimization, 294
- eqnum
 - StreaM, 424
- EQUAL
 - ftypes.h, 1453
- EqualArg
 - declare.h, 849
 - reshuf.c, 2645
- error
 - MoDeL, 237
 - VeRtEx, 491
- Error0
 - declare.h, 892
 - message.c, 1742
- Error1
 - declare.h, 892
 - message.c, 1742
- Error2
 - declare.h, 892
 - message.c, 1742
- ErrorBlock
 - O_const, 289
- ErrorInDollar
 - N_const, 256
- ERROROUT
 - ftypes.h, 1388
- errorsinloop
 - DoLoOp, 92
- Eside
 - R_const, 381
- eSize
 - AStack, 29
- EStack, 119
 - ~EStack, 119
 - det, 119
 - edgen, 119
 - EStack, 119
 - nplist, 120
 - plist, 120
 - print, 119
- eStack
 - AStack, 29
- eStackP
 - AStack, 29
- esym
 - EGraph, 111
 - MGraph, 214
 - T_EGraph, 449
 - T_MGraph, 454
- EULER
 - ftypes.h, 1419
- EvalDoLoopArg
 - declare.h, 979
 - dollar.c, 1106
- EvalPrelf
 - declare.h, 923
- pre.c, 2360
- evaluate.c, 1156, 1160
 - auxr1, 1157
 - auxr2, 1157
 - auxr3, 1157
 - auxr4, 1157
 - auxr5, 1157
 - ClearfFloat, 1159
 - EvaluateFun, 1159
 - EXTRAPRECISION, 1157
 - FormtoZ, 1158
 - GetFloatArgument, 1159
 - GetPiArgument, 1159
 - IntegerToFloat, 1158
 - In2, 1160
 - PackFloat, 1158
 - RatToFloat, 1158
 - RatToFloat, 1158
 - RND, 1157
 - SetfFloatPrecision, 1159
 - UnpackFloat, 1158
- EvaluateEuler
 - float.c, 1309
- EvaluateFun
 - evaluate.c, 1159
- EVEN_
 - ftypes.h, 1443
- EXCH
 - declare.h, 807
- ExchangeDollars
 - declare.h, 981
 - dollar.c, 1105
- ExchangeExpressions
 - declare.h, 981
 - execute.c, 1171
- EXCHINOUT
 - declare.h, 812
- EXCHN
 - declare.h, 807
- execarg
 - argument.c, 496
 - declare.h, 889
- ExecInside
 - declare.h, 939
 - dollar.c, 1105
- ExecMode
 - S_const, 387
- ExecModule
 - declare.h, 924
 - module.c, 1793
- ExecStore
 - declare.h, 924
 - module.c, 1794
- execterm
 - argument.c, 496
 - declare.h, 889
- execute.c, 1169, 1174
 - BRACKETCURRENTEXPR, 1170

- BRACKETOTHEREXPR, 1170
- CleanExpr, 1170
- CleanupTerm, 1172
- ContentMerge, 1173
- CountTerms1, 1173
- CURRENTBRACKET, 1170
- DoExecute, 1171
- ExchangeExpressions, 1171
- GetContent, 1172
- GetFirstBracket, 1172
- GetFirstTerm, 1172
- MakeGlobal, 1170
- NOBRACKETACTIVE, 1170
- PopVariables, 1170
- PutBracket, 1171
- PutInVflags, 1171
- SetMods, 1171
- SizeOfExpression, 1173
- SpecialCleanup, 1171
- TermsInBracket, 1173
- TermsInExpression, 1173
- TestDrop, 1170
- UnSetMods, 1171
- UpdatePositions, 1173
- EXECUTINGIF
 - ftypes.h, 1386
- EXECUTINGPRESWITCH
 - ftypes.h, 1386
- ExistsObject
 - declare.h, 991
 - minos.c, 1762
- exitflag
 - M_const, 189
- expand_memory
 - poly, 348
- ExpandBuffer
 - declare.h, 905
 - tools.c, 3122
- ExpandEuler
 - float.c, 1305
- ExpandMZV
 - float.c, 1305
- ExpandRat
 - declare.h, 1017
 - ratio.c, 2540
- ExpandTripleDots
 - declare.h, 927
 - pre.c, 2352
- expchanged
 - R_const, 381
- ExpectedSign
 - N_const, 261
- expflags
 - R_const, 382
- EXPFUNCTION
 - ftypes.h, 1419
- EXPLODEARG
 - ftypes.h, 1462
- expnum
 - M_const, 187
- EXPONENT
 - ftypes.h, 1406
- exprbufsize
 - ParallelVars, 324
- EXPRESSION
 - ftypes.h, 1404
- ExPrEsSiOn, 120
 - bracketinfo, 122
 - compression, 123
 - counter, 122
 - hidelevel, 122
 - inmem, 122
 - name, 122
 - namesize, 123
 - newbracketinfo, 122
 - node, 123
 - numdummies, 124
 - numfactors, 124
 - onfile, 121
 - printflag, 123
 - prototype, 121
 - renum, 121
 - renumlists, 122
 - replace, 123
 - size, 121
 - sizeprototype, 124
 - status, 123
 - uflags, 124
 - vflags, 123
 - whichbuffer, 123
- expression
 - FiLeInDeX, 133
- ExpressionList
 - C_const, 43
- EXPRESSIONNUMBER
 - ftypes.h, 1465
- EXPRESSIONONLY
 - ftypes.h, 1392
- Expressions
 - variable.h, 3236
- exprfillwarning
 - C_const, 60
- EXPRHEAD
 - ftypes.h, 1437
- EXPRNAME
 - declare.h, 816
- EXPRNAMES
 - ftypes.h, 1461
- exprnames
 - C_const, 43
- exprnr
 - OPTIMIZERESULT, 298
- exprnumber
 - SpecTatoR, 407
- EXPRSOUT
 - ftypes.h, 1388

- ExprStat
 - FixedGlobals, 135
- ExprStatus
 - bugtool.c, 542
 - declare.h, 1005
- exprtodo
 - ParallelVars, 324
- EXPTOEXP
 - ftypes.h, 1434
- ext
 - EEdge, 98
 - T_EEdge, 445
 - T_ENode, 450
 - T_MNode, 457
- extcmd.c, 1205, 1207
 - closeAllExternalChannels, 1207
 - closeExternalChannel, 1206
 - getCurrentExternalChannel, 1206
 - initPresetExternalChannels, 1206
 - openExternalChannel, 1206
 - selectExternalChannel, 1206
- EXTERNALCHANNELOUT
 - ftypes.h, 1388
- EXTERNALCHANNELSTREAM
 - ftypes.h, 1382
- externalset
 - TERMINFO, 472
- EXTERNLOCK
 - declare.h, 824
- externonly
 - VeriEx, 491
- EXTERNRWLOCK
 - declare.h, 825
- EXTEUCLIDEAN
 - ftypes.h, 1416
- extloop
 - DNode, 86
 - ENode, 118
 - MNode, 221
- extMom
 - EEdge, 99
 - EGraph, 113
- extMomConsv
 - EGraph, 107
- extonly
 - Particle, 330
 - PInput, 339
- extperm
 - EGraph, 111
 - SProcess, 414
- EXTRAPARAMETER
 - ftypes.h, 1455
- EXTRAPRECISION
 - evaluate.c, 1157
- extrasym
 - C_const, 51
- EXTRASymbol
 - declare.h, 862
 - normal.c, 1905
- extrasyms
 - C_const, 69
- EXTRASymFUN
 - ftypes.h, 1415
- ExtraSymFun
 - declare.h, 1013
 - notation.c, 1972
- extself
 - MGraph, 216
- f
 - sOrT, 402
- FaCdOILaR, 124
 - size, 125
 - type, 125
 - value, 125
 - where, 125
- facnum
 - M_const, 187
- FACTARGFLAG
 - ftypes.h, 1464
- factor
 - factorized_poly, 126
 - TrAcEn, 477
 - TrAcEs, 483
- factor.c, 1226, 1227
 - FactorIn, 1227
 - FactorInExpr, 1227
- FACTORIAL
 - ftypes.h, 1409
- Factorial
 - declare.h, 849
 - reken.c, 2594
- factorials
 - T_const, 435
- FACTORIN
 - ftypes.h, 1413
- FactorIn
 - declare.h, 849
 - factor.c, 1227
- FactorInExpr
 - declare.h, 849
 - factor.c, 1227
- factorize_mpoly
 - flintinterface.h, 1284
- factorize_poly
 - flintinterface.h, 1284
- factorized_poly, 125
 - add_factor, 126
 - factor, 126
 - power, 126
 - tostring, 126
- FactorMode
 - O_const, 288
- FactorNum
 - O_const, 289

- factors
 - DoLIArS, [88](#)
- FACTORSYMBOL
 - ftypes.h, [1421](#)
- FALSE_EXPR
 - pre.c, [2349](#)
- FATAL_SIG_ERROR
 - portsignals.h, [2341](#)
- FBUFFERSIZE
 - fsizes.h, [1364](#)
- fbuffersize
 - M_const, [182](#)
- fbufnum
 - T_const, [439](#)
- fendMG
 - diawrap.cc, [1069](#)
- ff
 - sOrT, [402](#)
- ffbufnum
 - C_const, [61](#)
- FG
 - inivar.h, [1710](#)
 - variable.h, [3239](#)
- FGInput, [126](#)
 - coupl, [127](#)
 - finalc, [127](#)
 - finaln, [127](#)
 - initlc, [127](#)
 - initln, [127](#)
 - nfinal, [127](#)
 - ninitl, [127](#)
- fh
 - SpecTatoR, [406](#)
- FiLe, [128](#)
 - active, [130](#)
 - filesize, [129](#)
 - handle, [130](#)
 - inbuffer, [130](#)
 - name, [129](#)
 - numblocks, [130](#)
 - PObuffer, [129](#)
 - POfill, [129](#)
 - POfull, [129](#)
 - POposition, [129](#)
 - POsize, [130](#)
 - POstop, [129](#)
- file
 - sOrT, [399](#)
- FiLeDaTa, [131](#)
 - dirtyflag, [132](#)
 - Fill, [131](#)
 - Handle, [132](#)
 - Index, [131](#)
 - Position, [132](#)
- FILEHANDLE
 - structs.h, [2934](#)
- FILEINDEX
 - structs.h, [2933](#)
- FiLeInDeX, [132](#)
 - empty, [133](#)
 - expression, [133](#)
 - next, [133](#)
 - number, [133](#)
- filelist
 - tools.c, [3126](#)
- filelistsize
 - tools.c, [3126](#)
- filenum
 - N_const, [258](#)
- FileOnlyFlag
 - M_const, [176](#)
- fileposition
 - StreaM, [421](#)
- FILES
 - form3.h, [1347](#)
- filesize
 - FiLe, [129](#)
- FILESTREAM
 - ftypes.h, [1381](#)
- Fill
 - FiLeDaTa, [131](#)
- fill
 - PF_BUFFER, [334](#)
- FILLARG
 - declare.h, [813](#)
- fillEGraph
 - Assign, [19](#)
- FILLEXPRESS
 - declare.h, [814](#)
- FILLFUN
 - declare.h, [813](#)
- FILLFUN3
 - declare.h, [814](#)
- fillpoint
 - TaBIeBaSE, [462](#)
- FILLSUB
 - declare.h, [814](#)
- FILLVALUE
 - tools.c, [3109](#)
- finalc
 - FGInput, [127](#)
- finaln
 - FGInput, [127](#)
- finalPart
 - Process, [370](#)
- FinalStats
 - C_const, [58](#)
- finalstep
 - TrAcEs, [483](#)
- find_Horner_MCTS
 - optimize.cc, [2030](#)
- find_Horner_MCTS_expand_tree
 - optimize.cc, [2029](#)
- find_optimizations
 - optimize.cc, [2031](#)
- FindAll

- declare.h, 850
- pattern.c, 2205
- FindArg
 - argument.c, 497
 - declare.h, 936
- FindBracket
 - declare.h, 985
 - index.c, 1700
- FindCase
 - declare.h, 1031
 - if.c, 1685
- findcommand
 - compiler.c, 730
 - declare.h, 903
- FindDictionary
 - declare.h, 1026
 - dict.c, 1085
- FindExtraSymbol
 - declare.h, 1028
 - dict.c, 1085
- FindFunction
 - declare.h, 1028
 - dict.c, 1085
- FindFunWithArgs
 - declare.h, 1028
 - dict.c, 1085
- FindIndex
 - declare.h, 1028
 - dict.c, 1084
- FindInIndex
 - declare.h, 829
 - store.c, 2866
- FindInKeyWord
 - declare.h, 911
 - pre.c, 2352
- findInteractionCode
 - Model, 230
- findInteractionName
 - Model, 230
- FindKeyWord
 - declare.h, 911
 - pre.c, 2352
- FindLocalSubterm
 - declare.h, 1010
 - notation.c, 1972
- FINDLOOP
 - ftypes.h, 1456
- FindLus
 - declare.h, 969
 - lus.c, 1715
- findMClass
 - Model, 231
- FindMulti
 - declare.h, 850
 - findpat.c, 1238
- FindOnce
 - declare.h, 850
 - findpat.c, 1238
- FindOnly
 - declare.h, 850
 - findpat.c, 1238
- findParticleCode
 - Model, 229
- findParticleName
 - Model, 229
- findpat.c, 1237, 1239
 - FindMulti, 1238
 - FindOnce, 1238
 - FindOnly, 1238
 - FindRest, 1238
- findPattern
 - N_const, 251
- FindRange
 - declare.h, 1007
 - transform.c, 3181
- FindRest
 - declare.h, 850
 - findpat.c, 1238
- FindrNumber
 - declare.h, 850
 - store.c, 2866
- findRoot
 - EGraph, 107
- FindSubexpression
 - declare.h, 1011
 - notation.c, 1972
- FindSubterm
 - declare.h, 1010
 - notation.c, 1972
- FindSymbol
 - declare.h, 1027
 - dict.c, 1084
- FindTableNumber
 - declare.h, 993
 - minos.c, 1761
- FindTableTree
 - declare.h, 977
 - tables.c, 2993
- FindTB
 - declare.h, 843
 - tables.c, 2994
- findTerm
 - N_const, 251
- FindTree
 - comtool.c, 774
 - declare.h, 966
- FindVar
 - declare.h, 845
 - if.c, 1684
- FindVector
 - declare.h, 1027
 - dict.c, 1084
- FiniLine
 - declare.h, 851
 - sch.c, 2685
- FINISH

- ftypes.h, [1457](#)
- finishcbuf
 - comtool.c, [770](#)
 - declare.h, [977](#)
- finished
 - tree_node, [487](#)
- FinishShuffle
 - declare.h, [842](#)
 - reshuf.c, [2646](#)
- FinishStuffle
 - declare.h, [843](#)
 - reshuf.c, [2647](#)
- finishuf
 - SHvariables, [396](#)
- FINISHUFFLE
 - structs.h, [2936](#)
- FiniShuffle
 - declare.h, [826](#)
- FiniTern
 - declare.h, [851](#)
 - proces.c, [2463](#)
- first
 - SeTs, [388](#)
- first_variable
 - poly, [350](#)
- FIRSTBRACKET
 - ftypes.h, [1412](#)
- firstconstindex
 - C_const, [54](#)
- firstctypemessage
 - C_const, [56](#)
- firstdollar
 - DoLoOp, [92](#)
- firstindexblock
 - iniinfo, [155](#)
- firstloopcall
 - DoLoOp, [92](#)
- FIRSTMODULE
 - ftypes.h, [1383](#)
- firstnameblock
 - iniinfo, [156](#)
- firstnamespace
 - P_const, [317](#)
- firstnum
 - DoLoOp, [91](#)
- FIRSTTERM
 - ftypes.h, [1416](#)
- FIRSTUSERFUNCTION
 - ftypes.h, [1420](#)
- FIRSTUSERSYMBOL
 - ftypes.h, [1422](#)
- fix_sign_fmpz_mpoly_ratfun
 - flintinterface.h, [1289](#)
- fix_sign_fmpz_poly_ratfun
 - flintinterface.h, [1289](#)
- fixarg
 - optimize.cc, [2025](#)
- FIXED_
 - ftypes.h, [1443](#)
- FIXEDGLOBALS
 - structs.h, [2938](#)
- FixedGlobals, [134](#)
 - cTable, [136](#)
 - ExprStat, [135](#)
 - fname, [135](#)
 - fname2, [135](#)
 - fname2base, [136](#)
 - fname2size, [136](#)
 - fnamebase, [135](#)
 - fnamesize, [136](#)
 - FunNam, [135](#)
 - OperaFind, [134](#)
 - Operation, [134](#)
 - s_one, [135](#)
 - swmes, [135](#)
 - VarType, [135](#)
- fixedset, [136](#)
 - description, [137](#)
 - dimension, [137](#)
 - name, [137](#)
 - type, [137](#)
- fixedsets
 - inivar.h, [1710](#)
 - variable.h, [3239](#)
- FixIndices
 - C_const, [49](#)
- fkind
 - EFLine, [101](#)
- flags
 - FuNcTiOn, [145](#)
 - InDeX, [150](#)
 - indexblock, [151](#)
 - KEYWORD, [162](#)
 - KEYWORDV, [163](#)
 - SeTs, [389](#)
 - SETUPPARAMETERS, [390](#)
 - SpecTatoR, [407](#)
 - SyMbOl, [430](#)
 - TaBlEs, [466](#)
 - TERMINFO, [472](#)
 - VeCtOr, [489](#)
- flg0
 - MNodeClass, [226](#)
- flg1
 - MNodeClass, [226](#)
- flg2
 - MNodeClass, [226](#)
- flines
 - EGraph, [114](#)
- flint::fmpz, [137](#)
 - ~fmpz, [138](#)
 - d, [138](#)
 - fmpz, [138](#)
 - print, [138](#)
- flint::mpoly, [242](#)
 - ~mpoly, [242](#)

- d, 243
- mpoly, 242
- print, 243
- flint::mpoly_ctx, 243
 - ~mpoly_ctx, 243
 - d, 244
 - mpoly_ctx, 243
- flint::mpoly_factor, 244
 - ~mpoly_factor, 244
 - d, 245
 - mpoly_factor, 244
- flint::poly, 343
 - ~poly, 343
 - d, 343
 - poly, 343
 - print, 343
- flint::poly_factor, 361
 - ~poly_factor, 362
 - d, 362
 - poly_factor, 362
- flint_check_version
 - flintwrap.cc, 1294
- flint_div
 - flintwrap.cc, 1293
- flint_factorize_argument
 - flintwrap.cc, 1293
- flint_factorize_dollar
 - flintwrap.cc, 1293
- flint_final_cleanup_master
 - flintwrap.cc, 1293
- flint_final_cleanup_thread
 - flintwrap.cc, 1293
- flint_gcd
 - flintwrap.cc, 1293
- flint_inverse
 - flintwrap.cc, 1294
- flint_mul
 - flintwrap.cc, 1294
- flint_ratfun_add
 - flintwrap.cc, 1294
- flint_ratfun_normalize
 - flintwrap.cc, 1294
- flint_rem
 - flintwrap.cc, 1294
- flintinterface.cc, 1255, 1256
 - IFW, 1255
 - UNIVARIATE_DENSITY_THR, 1255
- flintinterface.h, 1282, 1290
 - cleanup, 1284
 - cleanup_master, 1284
 - divmod_mpoly, 1284
 - divmod_poly, 1284
 - factorize_mpoly, 1284
 - factorize_poly, 1284
 - fix_sign_fmpz_mpoly_ratfun, 1289
 - fix_sign_fmpz_poly_ratfun, 1289
 - fmpz_get_form, 1285
 - fmpz_set_form, 1285
 - form_sort, 1285
 - from_argument_mpoly, 1285
 - from_argument_poly, 1285
 - gcd_mpoly, 1286
 - gcd_poly, 1286
 - get_variables, 1286
 - inverse_poly, 1286
 - mul_mpoly, 1286
 - mul_poly, 1287
 - ratfun_add_mpoly, 1287
 - ratfun_add_poly, 1287
 - ratfun_normalize_mpoly, 1287
 - ratfun_normalize_poly, 1287
 - ratfun_read_mpoly, 1288
 - ratfun_read_poly, 1288
 - simplify_fmpz, 1289
 - simplify_fmpz_poly, 1289
 - to_argument_mpoly, 1288
 - to_argument_poly, 1288, 1289
 - var_map_t, 1283
- FlintPolyFlag
 - C_const, 62
- flintwrap.cc, 1292, 1295
 - flint_check_version, 1294
 - flint_div, 1293
 - flint_factorize_argument, 1293
 - flint_factorize_dollar, 1293
 - flint_final_cleanup_master, 1293
 - flint_final_cleanup_thread, 1293
 - flint_gcd, 1293
 - flint_inverse, 1294
 - flint_mul, 1294
 - flint_ratfun_add, 1294
 - flint_ratfun_normalize, 1294
 - flint_rem, 1294
- FlipLONG
 - O_const, 283
- FlipPOINTER
 - O_const, 283
- FlipPOS
 - O_const, 283
- FlipTable
 - declare.h, 987
 - tables.c, 2994
- FlipWORD
 - O_const, 283
- flist
 - MNodeClass, 225
 - MOrbits, 241
 - T_MNodeClass, 461
- float.c, 1299, 1310
 - AddFloats, 1302
 - AddRatToFloat, 1302
 - AddWithFloat, 1309
 - CalculateEuler, 1305
 - CalculateMZV, 1305
 - CalculateMZVhalf, 1304
 - CheckFloat, 1307

- Chop, [1309](#)
- ClearMZVTables, [1307](#)
- CoChop, [1308](#)
- CoEvaluate, [1309](#)
- CoStrictRounding, [1308](#)
- CoToFloat, [1307](#)
- CoToRat, [1308](#)
- deltaEuler, [1304](#)
- deltaEulerC, [1304](#)
- deltaMZV, [1304](#)
- DivFloats, [1302](#)
- DoubleTable, [1303](#)
- EndTable, [1304](#)
- EvaluateEuler, [1309](#)
- ExpandEuler, [1305](#)
- ExpandMZV, [1305](#)
- FloatFunToRat, [1306](#)
- FloatToInteger, [1301](#)
- FloatToRat, [1302](#)
- Form_mpf_clear, [1301](#)
- Form_mpf_empty, [1306](#)
- Form_mpf_init, [1301](#)
- Form_mpf_set_prec_raw, [1301](#)
- FormtoZ, [1301](#)
- GMPSPREAD, [1300](#)
- IntegerToFloat, [1302](#)
- MergeWithFloat, [1309](#)
- MulFloats, [1302](#)
- MulRatToFloat, [1303](#)
- PackFloat, [1305](#)
- PrintFloat, [1307](#)
- RatToFloat, [1306](#)
- ReadFloat, [1306](#)
- SetFloatPrecision, [1307](#)
- SetupMPFTables, [1307](#)
- SetupMZVTables, [1307](#)
- SimpleDelta, [1303](#)
- SimpleDeltaC, [1303](#)
- SingleTable, [1303](#)
- StrictRounding, [1308](#)
- TestFloat, [1306](#)
- ToFloat, [1308](#)
- ToRat, [1308](#)
- UnpackFloat, [1305](#)
- WITHCUTOFF, [1300](#)
- ZeroTable, [1306](#)
- ZtoForm, [1301](#)
- FLOATFUN
 - ftypes.h, [1418](#)
- FloatFunToRat
 - float.c, [1306](#)
- FLOATMODE
 - ftypes.h, [1446](#)
- FloatToInteger
 - float.c, [1301](#)
- FloatToRat
 - float.c, [1302](#)
- FLOOP
 - ftypes.h, [1474](#)
- fltrace
 - EGraph, [108](#)
- flush_cache
 - checkpoint.c, [549](#)
- FLUSHCONSOLE
 - declare.h, [810](#)
- FlushFile
 - declare.h, [902](#)
 - tools.c, [3115](#)
- FlushOut
 - declare.h, [851](#)
 - sort.c, [2754](#)
- FlushSpectators
 - declare.h, [1030](#)
 - spectator.c, [2821](#)
- fmpz
 - flint::fmpz, [138](#)
- fmpz_get_form
 - flintinterface.h, [1285](#)
- fmpz_set_form
 - flintinterface.h, [1285](#)
- fname
 - FixedGlobals, [135](#)
- fname2
 - FixedGlobals, [135](#)
- fname2base
 - FixedGlobals, [136](#)
- fname2size
 - FixedGlobals, [136](#)
- fnamebase
 - FixedGlobals, [135](#)
- fnamesize
 - FixedGlobals, [136](#)
- FoldName
 - Stream, [422](#)
- forallignment
 - T_MNodeClass, [461](#)
- ForFindOnly
 - N_const, [251](#)
- form3.h, [1341](#), [1351](#)
 - AWORDMASK, [1346](#)
 - BETAVERSION, [1343](#)
 - BITSINLONG, [1345](#)
 - BITSINWORD, [1344](#)
 - BOOL, [1351](#)
 - bzero, [1349](#)
 - FILES, [1347](#)
 - form_alignof, [1347](#)
 - FULLMAX, [1346](#)
 - GetPID, [1349](#)
 - inline, [1344](#)
 - LONG, [1350](#)
 - LONG_MAX_VALUE, [1345](#)
 - LONG_MIN_VALUE, [1345](#)
 - MAJORVERSION, [1343](#)
 - MAX_OPEN_FILES, [1349](#)
 - MAXLONG, [1346](#)

- MAXPOSITIVE, [1346](#)
- MAXPOSITIVE2, [1346](#)
- MAXPOSITIVE4, [1346](#)
- MINORVERSION, [1343](#)
- MLONG, [1351](#)
- NDEBUG, [1344](#)
- PRODUCTIONDATE, [1343](#)
- RLONG, [1350](#)
- SBYTE, [1350](#)
- SPECMASK, [1345](#)
- STATIC_ASSERT, [1344](#)
- STATIC_ASSERT__1, [1344](#)
- STATIC_ASSERT__2, [1344](#)
- STATIC_ASSERT__3, [1344](#)
- TOPBITONLY, [1345](#)
- TOPLONGBITONLY, [1345](#)
- UBYTE, [1350](#)
- Uclose, [1347](#)
- Uflush, [1347](#)
- Ugetpos, [1348](#)
- UINT, [1350](#)
- ULONG, [1350](#)
- Uopen, [1347](#)
- Uread, [1347](#)
- Useek, [1348](#)
- Usetbuf, [1348](#)
- Usetpos, [1348](#)
- Ustdout, [1349](#)
- Usync, [1349](#)
- Utell, [1348](#)
- Utruncate, [1349](#)
- UWORD, [1350](#)
- Uwrite, [1348](#)
- WILDMASK, [1346](#)
- WITHSORTBOTS, [1347](#)
- WORD, [1350](#)
- WORD_MAX_VALUE, [1345](#)
- WORD_MIN_VALUE, [1345](#)
- WORDMASK, [1346](#)
- form_alignof
 - form3.h, [1347](#)
- FORM_INLINE
 - declare.h, [822](#)
- Form_mpf_clear
 - float.c, [1301](#)
- Form_mpf_empty
 - float.c, [1306](#)
- Form_mpf_init
 - float.c, [1301](#)
- Form_mpf_set_prec_raw
 - float.c, [1301](#)
- form_sort
 - flintinterface.h, [1285](#)
- FORMNAME
 - startup.c, [2831](#)
- FormtoZ
 - evaluate.c, [1158](#)
 - float.c, [1301](#)
- FortDotChar
 - O_const, [289](#)
- FortFirst
 - O_const, [288](#)
- Fortran90Kind
 - C_const, [51](#)
- FortranCont
 - M_const, [187](#)
- FORTTRANCONTINUATIONLINES
 - fsizes.h, [1360](#)
- FORTTRANMODE
 - ftypes.h, [1400](#)
- FoStage4
 - R_const, [376](#)
- fPatches
 - sOrT, [401](#)
- fPatchesStop
 - sOrT, [401](#)
- fPatchN
 - sOrT, [405](#)
- fPatchN1
 - sOrT, [404](#)
- Fraction, [138](#)
 - add, [140](#)
 - den, [141](#)
 - Fraction, [139](#)
 - gcd, [140](#)
 - isEq, [140](#)
 - normal, [140](#)
 - num, [141](#)
 - print, [139](#)
 - ratio, [141](#)
 - setValue, [139](#)
 - sub, [140](#)
- freelg
 - MNode, [222](#)
 - T_MNode, [457](#)
- FreeNameTree
 - declare.h, [897](#)
 - names.c, [1860](#)
- FreeTableBase
 - declare.h, [992](#)
 - minos.c, [1760](#)
- from
 - PF_BUFFER, [336](#)
- From0List
 - declare.h, [904](#)
 - tools.c, [3122](#)
- from_argument_mpoly
 - flintinterface.h, [1285](#)
- from_argument_poly
 - flintinterface.h, [1285](#)
- from_coefficient_list
 - poly, [353](#)
- FROMBRAC
 - ftypes.h, [1434](#)
- fromDGraph
 - EGraph, [105](#)

- FROMDISK
 - minos.h, [1781](#)
- FROMFUNCTION
 - ftypes.h, [1460](#)
- fromindex
 - T_const, [444](#)
- FromList
 - declare.h, [904](#)
 - tools.c, [3121](#)
- fromMGraph
 - Assign, [18](#)
 - EGraph, [105](#)
- FROMMODULEOPTION
 - ftypes.h, [1465](#)
- fromPerm
 - MOrbits, [241](#)
- FROMPOINTINSTRUCTION
 - ftypes.h, [1465](#)
- FromPolyRatFun
 - declare.h, [1014](#)
 - ratio.c, [2539](#)
- FROMSET
 - ftypes.h, [1434](#)
- FromStdin
 - M_const, [191](#)
- FromVarList
 - declare.h, [905](#)
 - tools.c, [3122](#)
- Frozen
 - N_const, [248](#)
- Fscr
 - R_const, [376](#)
- fsgn
 - EGraph, [110](#)
- fsizes.h, [1356](#), [1366](#)
 - COMMERCIALSIZE, [1359](#)
 - COMPILERBUFFER, [1360](#)
 - COMPINC, [1362](#)
 - COMPRESSBUFFER, [1360](#)
 - DEFAULTPROCESSBUCKETSIZE, [1362](#)
 - DEFAULTTHREADBUCKETSIZE, [1363](#)
 - DEFAULTTHREADLOADBALANCING, [1363](#)
 - DEFAULTTHREADS, [1363](#)
 - FBUFFERSIZE, [1364](#)
 - FORTRANCONTINUATIONLINES, [1360](#)
 - GZIPDEFAULT, [1363](#)
 - INDENTSPACE, [1364](#)
 - INITNAME SIZE, [1358](#)
 - INITNODESIZE, [1358](#)
 - JUMPRATIO, [1365](#)
 - MAXBRACKETBUFFERSIZE, [1362](#)
 - MAXCOUPLINGS, [1365](#)
 - MAXENAME, [1357](#)
 - MAXFLAGS, [1359](#)
 - MAXFLEVELS, [1362](#)
 - MAXFPATCHES, [1361](#)
 - MAXIF, [1359](#)
 - MAXLABELS, [1359](#)
 - MAXLEGS, [1365](#)
 - MAXLEVELS, [1360](#)
 - MAXLHS, [1360](#)
 - MAXLINELENGTH, [1365](#)
 - MAXLOOPS, [1359](#)
 - MAXMATCH, [1359](#)
 - MAXMULTIBRACKETLEVELS, [1364](#)
 - MAXNEST, [1358](#)
 - MAXNUMBERSIZE, [1358](#)
 - MAXNUMSIZE, [1362](#)
 - MAXPARLEVEL, [1358](#)
 - MAXPARTICLES, [1365](#)
 - MAXPATCHES, [1360](#)
 - MAXPRENAMESIZE, [1357](#)
 - MAXREPEAT, [1358](#)
 - MAXSAVEFUNCTION, [1357](#)
 - MAXWILDC, [1360](#)
 - MINALLOC, [1365](#)
 - MULTIINDENTSPACE, [1364](#)
 - NORMSIZE, [1358](#)
 - NPAIR1, [1364](#)
 - NPAIR2, [1364](#)
 - NUMFACS, [1359](#)
 - NUMFIXED, [1358](#)
 - NUMOPTIONS, [1365](#)
 - NUMSTORECACHES, [1364](#)
 - NUMTABLEENTRIES, [1360](#)
 - SFHSIZE, [1362](#)
 - SHMWINSIZE, [1363](#)
 - SIZEFACS, [1359](#)
 - SIZESTORECACHE, [1364](#)
 - SLARGEBUFFER, [1361](#)
 - SMAFPATCHES, [1361](#)
 - SMAXPATCHES, [1361](#)
 - SORTIOSIZE, [1361](#)
 - SPECTATORSIZE, [1362](#)
 - SSMALLBUFFER, [1361](#)
 - SSMALLOVERFLOW, [1361](#)
 - SSORTIOSIZE, [1362](#)
 - STERMSSMALL, [1361](#)
 - TABLEEXTENSION, [1363](#)
 - THREADSCRATCHOUTSIZE, [1363](#)
 - THREADSCRATCHSIZE, [1363](#)
- ftype
 - EFLine, [101](#)
- ftypes.h, [1368](#), [1475](#)
 - ABSFUNCTION, [1410](#)
 - ACOSFUNCTION, [1414](#)
 - ACOSHFUNCTION, [1415](#)
 - ADDARG, [1463](#)
 - AGMFUNCTION, [1419](#)
 - ALLARGS, [1461](#)
 - ALLDIRTY, [1436](#)
 - ALLFUNCTIONS, [1420](#)
 - ALLFUNPOWERS, [1457](#)
 - ALLINTEGERDOUBLE, [1401](#)
 - ALLMZVFUNCTIONS, [1420](#)
 - ALLVARIABLES, [1391](#)

- ALSODOLLARS, [1460](#)
- ALSOFUNARGS, [1459](#)
- ALSOPOWERS, [1459](#)
- ALSOVERSE, [1402](#)
- ANDCOND, [1453](#)
- ANTISYMMETRIC, [1448](#)
- ANYTYPE, [1392](#)
- ARGFIELD, [1406](#)
- ARGHEAD, [1436](#)
- ARGRANGE, [1461](#)
- ARGTOARG, [1434](#)
- ARGWILD, [1405](#)
- ARLTOARL, [1434](#)
- ASINFUNCTION, [1414](#)
- ASINHFUNCTION, [1415](#)
- ATAN2FUNCTION, [1414](#)
- ATANFUNCTION, [1414](#)
- ATANHFUNCTION, [1415](#)
- ATENDOFMODULE, [1390](#)
- AUTONAMES, [1460](#)
- BASECODE, [1464](#)
- BERNOULLIFUNCTION, [1411](#)
- BINOMIAL, [1409](#)
- BIPART, [1473](#)
- BLOCK, [1418](#)
- BUILTINDOLLARS, [1422](#)
- BUILTININDICES, [1422](#)
- BUILTINSYMBOLS, [1422](#)
- BUILTINVECTORS, [1422](#)
- CDELETE, [1392](#)
- CDELTA, [1393](#)
- CDOLLAR, [1393](#)
- CDOTPRODUCT, [1393](#)
- CDOUBLEDOT, [1394](#)
- CDUBIOUS, [1393](#)
- CEXPRESSION, [1393](#)
- CFUN, [1474](#)
- CFUNCTION, [1392](#)
- CHECKEXTERN, [1472](#)
- CHECKLOGTYPE, [1404](#)
- CHISHOLM, [1402](#)
- CINDEX, [1392](#)
- CLEANFLAG, [1435](#)
- CLEAR, [1454](#)
- CLEARMODULE, [1384](#)
- CMODE, [1400](#)
- CMODEL, [1394](#)
- CNUMBER, [1393](#)
- COEFFI, [1451](#)
- COEFFICIENTSONLY, [1459](#)
- COEFFSYMBOL, [1420](#)
- COMFUNPOWERS, [1456](#)
- CONJUGATION, [1411](#)
- CONTENTTERM, [1416](#)
- CONTRACT, [1432](#)
- COSFUNCTION, [1413](#)
- COSHFUNCTION, [1414](#)
- COULDCOMMUTE, [1467](#)
- COUNTFUNCTION, [1411](#)
- CRANGE, [1394](#)
- CSET, [1393](#)
- CSUBEXP, [1393](#)
- CSYMBOL, [1392](#)
- CVECTOR, [1392](#)
- CVECTOR1, [1394](#)
- CYCLEARG, [1462](#)
- CYCLESYMMETRIC, [1448](#)
- CYCLI, [1474](#)
- CYCLR, [1474](#)
- DECLARATION, [1390](#)
- DECODEARG, [1462](#)
- DEDUPARG, [1464](#)
- DEFINITION, [1390](#)
- DELTA, [1406](#)
- DELTA2, [1410](#)
- DELTA3, [1408](#)
- DELTAP, [1410](#)
- DENOMINATOR, [1406](#)
- DENOMINATORSYMBOL, [1421](#)
- DENSETABLE, [1471](#)
- DIAGRAMS, [1417](#)
- DICT_ALLNUMBERS, [1468](#)
- DICT_DOFUNWITHARGS, [1469](#)
- DICT_DOSPECIALS, [1468](#)
- DICT_DOVARIABLES, [1468](#)
- DICT_FUNCTION, [1470](#)
- DICT_FUNCTION_WITH_ARGUMENTS, [1470](#)
- DICT_INDEX, [1470](#)
- DICT_INDOLLARS, [1469](#)
- DICT_INTEGERNUMBER, [1469](#)
- DICT_INTEGERONLY, [1468](#)
- DICT_NOFUNWITHARGS, [1469](#)
- DICT_NONUMBERS, [1468](#)
- DICT_NOSPECIALS, [1468](#)
- DICT_NOTINDOLLARS, [1469](#)
- DICT_NOVARIABLES, [1468](#)
- DICT_RANGE, [1470](#)
- DICT_RATIONALNUMBER, [1469](#)
- DICT_RATIONALONLY, [1468](#)
- DICT_SPECIALCHARACTER, [1470](#)
- DICT_SYMBOL, [1469](#)
- DICT_VECTOR, [1469](#)
- DIMENSIONSYPMBOL, [1421](#)
- DIRTYFLAG, [1436](#)
- DIRTYSYMFLAG, [1436](#)
- DISTRIBUTION, [1408](#)
- DIVFUNCTION, [1412](#)
- DOALL, [1467](#)
- DOESNOTCOMMUTE, [1467](#)
- DOLARGUMENT, [1455](#)
- DOLINDEX, [1456](#)
- DOLLAREXP2, [1405](#)
- DOLLAREXPRESSION, [1405](#)
- DOLLARFLAG, [1450](#)
- DOLLARNAMES, [1461](#)
- DOLLARSTREAM, [1382](#)

- DOLNUMBER, [1455](#)
- DOLSUBTERM, [1455](#)
- DOLTERMS, [1456](#)
- DOLUNDEFINED, [1455](#)
- DOLWILDARGS, [1456](#)
- DOLZERO, [1456](#)
- DOTPBIT, [1454](#)
- DOTPRODUCT, [1404](#)
- DOUBLEFORTRANMODE, [1401](#)
- DOUBLEPRECISIONFLAG, [1401](#)
- DROP, [1437](#)
- DROPARG, [1463](#)
- DROPGEXPRESSION, [1438](#)
- DROPHGEXPRESSION, [1439](#)
- DROPHLEXPRESSON, [1439](#)
- DROPLEXPRESSON, [1438](#)
- DROPEDEXPRESSION, [1438](#)
- DROPSPECTATOREXPRESSON, [1440](#)
- DUMFUN, [1408](#)
- DUMMY, [1453](#)
- DUMMYBUFFER, [1461](#)
- DUMMYFLAG, [1445](#)
- DUMMYFUN, [1408](#)
- DUMMYINDEX_, [1444](#)
- DUMMYTEN, [1408](#)
- DUMPINTERMS, [1387](#)
- DUMPOUTTERMS, [1387](#)
- DUMPTOCOMPILER, [1387](#)
- DUMPTOPARALLEL, [1387](#)
- DUMPTOSORT, [1387](#)
- EATTENSOR, [1435](#)
- EDGE, [1418](#)
- EESYMBOL, [1421](#)
- ELEMENTLOADED, [1459](#)
- ELEMENTUSED, [1459](#)
- EMPTYINDEX, [1445](#)
- EMSYMBOL, [1421](#)
- ENCODEARG, [1462](#)
- END, [1454](#)
- ENDMODULE, [1384](#)
- ENDOFINPUT, [1382](#)
- ENDOFSTREAM, [1382](#)
- EQUAL, [1453](#)
- ERROROUT, [1388](#)
- EULER, [1419](#)
- EVEN_, [1443](#)
- EXECUTINGIF, [1386](#)
- EXECUTINGPRESWITCH, [1386](#)
- EXPFUNCTION, [1419](#)
- EXPLODEARG, [1462](#)
- EXPONENT, [1406](#)
- EXPRESSION, [1404](#)
- EXPRESSIONNUMBER, [1465](#)
- EXPRESSIONONLY, [1392](#)
- EXPRHEAD, [1437](#)
- EXPRNAMES, [1461](#)
- EXPRSOUT, [1388](#)
- EXPTOEXP, [1434](#)
- EXTERNALCHANNELOUT, [1388](#)
- EXTERNALCHANNELSTREAM, [1382](#)
- EXTEUCLIDEAN, [1416](#)
- EXTRAPARAMETER, [1455](#)
- EXTRASymbol, [1465](#)
- EXTRASymFUN, [1415](#)
- FACTARGFLAG, [1464](#)
- FACTORIAL, [1409](#)
- FACTORIN, [1413](#)
- FACTORSYMBOL, [1421](#)
- FILESTREAM, [1381](#)
- FINDLOOP, [1456](#)
- FINISH, [1457](#)
- FIRSTBRACKET, [1412](#)
- FIRSTMODULE, [1383](#)
- FIRSTTERM, [1416](#)
- FIRSTUSERFUNCTION, [1420](#)
- FIRSTUSERSYMBOL, [1422](#)
- FIXED_, [1443](#)
- FLOATFUN, [1418](#)
- FLOATMODE, [1446](#)
- FLOOP, [1474](#)
- FORTRANMODE, [1400](#)
- FROMBRAC, [1434](#)
- FROMFUNCTION, [1460](#)
- FROMMODULEOPTION, [1465](#)
- FROMPOINTINSTRUCTION, [1465](#)
- FROMSET, [1434](#)
- FUNBIT, [1454](#)
- FUNCTION, [1405](#)
- FUNCTIONONLY, [1391](#)
- FUNCTIONSORT, [1446](#)
- FUNHEAD, [1436](#)
- FUNNYDOLLAR, [1445](#)
- FUNNYVEC, [1444](#)
- FUNNYWILD, [1445](#)
- FUNTOFUN, [1434](#)
- GAMMA, [1407](#)
- GAMMA1, [1444](#)
- GAMMA5, [1444](#)
- GAMMA6, [1444](#)
- GAMMA7, [1444](#)
- GAMMAFIVE, [1407](#)
- GAMMAFUN, [1419](#)
- GAMMAFUNCTION, [1442](#)
- GAMMAI, [1407](#)
- GAMMASEVEN, [1407](#)
- GAMMASIX, [1407](#)
- GCDFUNCTION, [1412](#)
- GENCOMMUTE, [1455](#)
- GENERALFUNCTION, [1442](#)
- GENNONCOMMUTE, [1455](#)
- GFIVE, [1450](#)
- GIDENT, [1450](#)
- GLOBAL, [1454](#)
- GLOBALEXPRESSION, [1438](#)
- GLOBALMODULE, [1383](#)
- GLOBALSPECTATORFLAG, [1470](#)

- GMINUS, [1451](#)
- GPLUS, [1451](#)
- GREATER, [1452](#)
- GREATEREQUAL, [1452](#)
- HAAKJE, [1406](#)
- HAAKJE0, [1405](#)
- HEADERFILE, [1383](#)
- HIDDENGEXPRESSION, [1439](#)
- HIDDENLEXPRESSION, [1439](#)
- HIDE, [1437](#)
- HIDEGEXPRESSION, [1439](#)
- HIDELEXPRESSION, [1439](#)
- HPLFUNCTION, [1419](#)
- HTOZARG, [1464](#)
- IDFUNCTION, [1416](#)
- IDHEAD, [1450](#)
- IFDOLLAR, [1451](#)
- IFDOLLAREXTRA, [1452](#)
- IFEXPRESSION, [1452](#)
- IFFLOATNUMBER, [1452](#)
- IFISFACTORIZED, [1452](#)
- IFOCCURS, [1452](#)
- IFUSERFLAG, [1452](#)
- IMPLODEARG, [1462](#)
- INCEXPRESSION, [1439](#)
- INDEX, [1404](#)
- INDEX_, [1443](#)
- INDEXONLY, [1391](#)
- INDTOIND, [1433](#)
- INDTOSUB, [1433](#)
- INPUTOUT, [1388](#)
- INPUTSTREAM, [1382](#)
- INTFUNCTION, [1410](#)
- INTOHIDE, [1437](#)
- INTOHIDEGEXPRESSION, [1440](#)
- INTOHIDELEXPRESSION, [1440](#)
- INUSE, [1467](#)
- INVERSEFACTORIAL, [1409](#)
- INVERSEFUNCTION, [1416](#)
- INVERSETABLE, [1459](#)
- ISCOMPRESSED, [1447](#)
- ISFACTORIZED, [1447](#)
- ISFORTRAN90, [1402](#)
- ISINRHS, [1447](#)
- ISLYNDON, [1463](#)
- ISLYNDONR, [1463](#)
- ISNOTFORTRAN90, [1402](#)
- ISUNMODIFIED, [1446](#)
- ISYMBOL, [1420](#)
- ISZERO, [1446](#)
- KEEPZERO, [1447](#)
- LBACE, [1396](#)
- LESS, [1453](#)
- LESSEQUAL, [1453](#)
- LEVICIVITA, [1408](#)
- LHSIDE, [1400](#)
- LHSIDEX, [1400](#)
- LI2FUNCTION, [1415](#)
- LINFUNCTION, [1415](#)
- LISTEDLOOP, [1389](#)
- LNFUNCTION, [1413](#)
- LNUMBER, [1406](#)
- LOADDOLLAR, [1435](#)
- LOCALEXPRESSION, [1438](#)
- LONGNUMBER, [1451](#)
- LOOKINGFORELSE, [1386](#)
- LOOKINGFORENDIF, [1386](#)
- LPARENTHESIS, [1396](#)
- LRPARENTHESSES, [1398](#)
- MAINSORT, [1446](#)
- MAKEARGS, [1461](#)
- MAKERATIONAL, [1416](#)
- MAPLEMODE, [1400](#)
- MATCH, [1451](#)
- MATCHFUNCTION, [1411](#)
- MATHEMATICAMODE, [1400](#)
- MAXBUILTINFUNCTION, [1420](#)
- MAXFUNCTION, [1410](#)
- MAXPOWEROF, [1412](#)
- MAXRANGEINDICATOR, [1461](#)
- MINFUNCTION, [1409](#)
- MINPOWEROF, [1412](#)
- MINSPEC, [1445](#)
- MINVECTOR, [1405](#)
- MIXED, [1390](#)
- MIXED2, [1390](#)
- MOD2FUNCTION, [1409](#)
- MODFUNCTION, [1409](#)
- MODLOCAL, [1459](#)
- MODMAX, [1458](#)
- MODMIN, [1458](#)
- MODNONE, [1458](#)
- MODSUM, [1458](#)
- MODULEINSTACK, [1386](#)
- MOEBIUS, [1417](#)
- MPLFUNCTION, [1420](#)
- MULFUNCTION, [1417](#)
- MULTIPLEOF, [1451](#)
- MULTIPLYARG, [1463](#)
- MUSTCLEANPRF, [1436](#)
- MZV, [1419](#)
- MZVHALF, [1419](#)
- NAMENOTFOUND, [1455](#)
- NEG0_, [1443](#)
- NEG_, [1443](#)
- NEWFACTARG, [1465](#)
- NEWLYDEFINEDEXPRESSION, [1442](#)
- NEWSTATEMENT, [1386](#)
- NMIN4SHIFT, [1404](#)
- NOAUTO, [1391](#)
- NOCHECKLOGTYPE, [1403](#)
- NODEFUNCTION, [1418](#)
- NODOUBLEMASK, [1401](#)
- NOFUNPOWERS, [1456](#)
- NOINDEX, [1445](#)
- NOINVERSES, [1460](#)

NOLYNDON, [1464](#)
NONBIPART, [1473](#)
NOPARALLEL_CONVPOLY, [1384](#)
NOPARALLEL_DOLLAR, [1384](#)
NOPARALLEL_NPROC, [1385](#)
NOPARALLEL_RHS, [1384](#)
NOPARALLEL_SPECTATOR, [1384](#)
NOPARALLEL_TBLDOLLAR, [1385](#)
NOPARALLEL_USER, [1385](#)
NOQUADMASK, [1402](#)
NORMALFORMAT, [1402](#)
NORMALIZEFLAG, [1450](#)
NOSIGMA, [1472](#)
NOSNAIL, [1473](#)
NOSPACEFORMAT, [1402](#)
NOTADPOLE, [1473](#)
NOTEQUAL, [1453](#)
NOTFLOOP, [1474](#)
NOTRICK, [1402](#)
NOTSIMPLE, [1473](#)
NOUNPACK, [1460](#)
NUMARG, [1461](#)
NUMARGSFUN, [1409](#)
NUMERATORSYMBOL, [1421](#)
NUMERICLOOP, [1388](#)
NUMFACTORS, [1416](#)
NUMSPECSETS, [1446](#)
NUMTERMSFUN, [1412](#)
NUMTOIND, [1435](#)
NUMTONUM, [1435](#)
NUMTOSUB, [1435](#)
NUMTOSYM, [1435](#)
O_BACKWARD, [1466](#)
O_CSE, [1466](#)
O_CSEGREEDY, [1466](#)
O_FORWARD, [1466](#)
O_FORWARDANDBACKWARD, [1467](#)
O_FORWARDORBACKWARD, [1467](#)
O_GREEDY, [1466](#)
O_MCTS, [1466](#)
O_NONE, [1465](#)
O_OCCURRENCE, [1466](#)
O_SIMULATED_ANNEALING, [1466](#)
ODD_, [1443](#)
OFFSHELL, [1472](#)
OLDFACTARG, [1465](#)
OLDSTATEMENT, [1386](#)
ONEEXPRESSION, [1389](#)
ONEPARTI, [1472](#)
ONEPARTR, [1472](#)
ONEPI, [1418](#)
ONLYFUNCTIONS, [1467](#)
ONSHHELL, [1472](#)
OPTHEAD, [1467](#)
ORCOND, [1453](#)
ORDEREDSET, [1470](#)
PARALLELFLAG, [1385](#)
PARTEST, [1391](#)
PARTITIONS, [1417](#)
PATTERNFUNCTION, [1411](#)
PERMUTATIONS, [1417](#)
PERMUTEARG, [1462](#)
PFORTRANMODE, [1401](#)
PHI, [1418](#)
PIPESTREAM, [1381](#)
PISYMBOL, [1420](#)
POLYADD, [1457](#)
POLYDIV, [1457](#)
POLYFUN, [1384](#)
POLYGCD, [1458](#)
POLYINTFAC, [1458](#)
POLYMUL, [1457](#)
POLYNORM, [1458](#)
POLYREM, [1458](#)
POLYSUB, [1457](#)
POS0_, [1442](#)
POS_, [1442](#)
POSITIVEONLY, [1460](#)
POSNEG, [1459](#)
PRECALCSTREAM, [1381](#)
PRELOWERAFTER, [1385](#)
PRENOACTION, [1385](#)
PREPROONLY, [1387](#)
PRERAISEAFTER, [1385](#)
PREREADSTREAM, [1381](#)
PREREADSTREAM2, [1382](#)
PREREADSTREAM3, [1382](#)
PRETYPEDO, [1389](#)
PRETYPEIF, [1389](#)
PRETYPEINSIDE, [1389](#)
PRETYPENONE, [1389](#)
PRETYPEPROCEDURE, [1389](#)
PRETYPESWITCH, [1389](#)
PREVARSTREAM, [1381](#)
PRIMENUMBER, [1416](#)
PRINTALL, [1441](#)
PRINTCONTENT, [1441](#)
PRINTCONTENTS, [1441](#)
PRINTLFILE, [1441](#)
PRINTOFF, [1440](#)
PRINTON, [1441](#)
PRINTONEFUNCTION, [1441](#)
PRINTONETERM, [1441](#)
PROCEDUREFILE, [1383](#)
PROPERORDERFLAG, [1457](#)
PUTFIRST, [1417](#)
PVFUNV, [1474](#)
PVFUNWP, [1474](#)
Q_, [1444](#)
QUADRUPLEFORTRANMODE, [1401](#)
QUADRUPLEPRECISIONFLAG, [1401](#)
RANDOMFUNCTION, [1415](#)
RANPERM, [1415](#)
RATIO, [1432](#)
RATIONALMODE, [1446](#)
RBRACE, [1396](#)

- RCYCLESYMMETRIC, 1448
- READSPECTATORFLAG, 1470
- REDEFINEDEXPRESSION, 1442
- REDUCEMODE, 1400
- REGULAR, 1457
- REGULAREXPRESSION, 1441
- REGULARSYMBOL, 1465
- REMFUNCTION, 1412
- REPLACEARG, 1462
- REPLACELOOP, 1456
- REPLACEMENT, 1408
- REVERSEARG, 1462
- REVERSEFILESTREAM, 1382
- REVERSEFUNCTION, 1408
- REVERSEORDER, 1448
- RHSIDE, 1400
- ROOTFUNCTION, 1411
- RPARENTHESIS, 1396
- SEARCHINGPRECASE, 1387
- SEARCHINGPREENDSWITCH, 1387
- SELECTARG, 1463
- SEPARATESYMBOL, 1421
- SETBIT, 1454
- SETEXP, 1405
- SETFUNCTION, 1407
- SETNUMBER, 1435
- SETONLY, 1392
- SETSET, 1405
- SETTONUM, 1434
- SETUPFILE, 1383
- SIGFUNCTION, 1410
- SIGMA, 1472
- SIGNFUN, 1409
- SIMPLE, 1473
- SINFUNCTION, 1413
- SINHFUNCTION, 1414
- SIZEOFFUNCTION, 1418
- SKIP, 1437
- SKIPGEXPRESSION, 1438
- SKIPLEXPRESSION, 1438
- SKIPUNHIDEGEXPRESSION, 1440
- SKIPUNHIDELEXPRESSION, 1440
- SNAIL, 1473
- SNUMBER, 1406
- SORT, 1453
- SORTANTIPOWER, 1403
- SORTHIGHFIRST, 1403
- SORTLOWFIRST, 1403
- SORTMODULE, 1383
- SORTPOWERFIRST, 1403
- SPARSETABLE, 1471
- SPECIFICATION, 1390
- SPECTATOREXPRESSION, 1440
- SQRTFUNCTION, 1413
- STATEMENT, 1390
- STATSMERGETOFILE, 1403
- STATSOUT, 1388
- STATSPOSTSORT, 1403
- STATSSPLITMERGE, 1403
- STORE, 1454
- STOREDEXPRESSION, 1438
- STOREMODULE, 1384
- SUBAFTER, 1450
- SUBAFTERNOT, 1450
- SUBALL, 1449
- SUBDISORDER, 1450
- SUBEXPR, 1451
- SUBEXPRESSION, 1404
- SUBEXPSIZE, 1437
- SUBMANY, 1449
- SUBMASK, 1449
- SUBMULTI, 1449
- SUBONCE, 1449
- SUBONLY, 1449
- SUBROUTINEFILE, 1383
- SUBSELECT, 1449
- SUBSORT, 1446
- SUBTERMUSED1, 1436
- SUBTERMUSED2, 1436
- SUBVECTOR, 1449
- SUMF1, 1407
- SUMF2, 1407
- SUMMEDIND, 1445
- SUMNUM1, 1432
- SUMNUM2, 1432
- SYMBOL, 1404
- SYMBOL_, 1443
- SYMBOLONLY, 1391
- SYMMETRIC, 1448
- SYMMETRIZE, 1432
- SYMTONUM, 1433
- SYMTOSSUB, 1433
- SYMTOSSYM, 1433
- TABLEBASEFILE, 1383
- TABLEFUNCTION, 1411
- TABLESTUB, 1413
- TADPOLE, 1473
- TAKETRACE, 1432
- TANFUNCTION, 1414
- TANHFUNCTION, 1414
- TCOMMA, 1396
- TCONJUGATE, 1398
- TDELTA, 1395
- TDIVIDE, 1397
- TDOLLAR, 1395
- TDOT, 1396
- TDOTPRODUCT, 1395
- TDUBIOUS, 1395
- EMPTY, 1399
- TENDOFIT, 1398
- TENSORFUNCTION, 1442
- TENVEC, 1432
- TERMFUNCTION, 1411
- TERMSINBRACKET, 1413
- TERMSINEXPR, 1412
- TEXPRESSION, 1395

TFLOAT, 1399
TFUN, 1475
TFUN1, 1475
TFUNCLOSE, 1397
TFUNCTION, 1394
TFUNOPEN, 1397
TGENINDEX, 1398
THETA, 1410
THETA2, 1410
THREADSDEBUG, 1388
TINDEX, 1394
TMINUS, 1397
TMPPOLYFUN, 1406
TMULTIPLY, 1397
TNOT, 1397
TNUMBER, 1395
TNUMBER1, 1398
TOBEFACTORED, 1447
TOBEUNFACTORED, 1447
TOFLOAT, 1418
TOLYNDON, 1463
TOLYNDONR, 1463
TOOUTPUT, 1390
TOPO, 1417
TOPOLOGIES, 1417
TOPOLOGIESONLY, 1471
TOPOLYNOMIALFLAG, 1464
TORAT, 1419
TPLUS, 1397
TPOWER, 1397
TPOWER1, 1398
TSET, 1395
TSETCLOSE, 1398
TSETDOL, 1399
TSETNUM, 1399
TSETOPEN, 1398
TSGAMMA, 1399
TSUBEXP, 1395
TSYMBOL, 1394
TVECTOR, 1394
TWILDARG, 1396
TWILDCARD, 1396
TYPEADJUSTBOUNDS, 1427
TYPEALLLOOPS, 1431
TYPEALLPATHS, 1431
TYPEAPPLY, 1428
TYPEAPPLYRESET, 1428
TYPEARG, 1425
TYPEARGEXPLODE, 1429
TYPEARGHEADSIZE, 1437
TYPEARGIMPLODE, 1429
TYPEARGTOEXTRASymbol, 1431
TYPEASSIGN, 1426
TYPECANONICALIZE, 1431
TYPECHAININ, 1428
TYPECHAINOUT, 1429
TYPECHISHOLM, 1424
TYPECLEARUSERFLAG, 1431
TYPECOUNT, 1423
TYPEDENOMINATORS, 1429
TYPEDETCURDUM, 1427
TYPEDISCARD, 1424
TYPEDOLOOP, 1430
TYPEDROPCOEFFICIENT, 1429
TYPEDROPSYMBOLS, 1430
TYPEELIF, 1424
TYPEELSE, 1424
TYPEENDDOLOOP, 1430
TYPEENDIF, 1424
TYPEENDREPEAT, 1423
TYPEENDSWITCH, 1431
TYPEEXIT, 1425
TYPEEXPRESSION, 1422
TYPEFACTARG, 1426
TYPEFACTARG2, 1426
TYPEFACTOR, 1429
TYPEFINDLOOP, 1427
TYPEFPRINT, 1425
TYPEFROMPOLYNOMIAL, 1430
TYPEGOTO, 1423
TYPEIDNEW, 1423
TYPEIDOLD, 1423
TYPEIF, 1424
TYPEINEXPRESSION, 1428
TYPEINSIDE, 1427
TYPEISFUN, 1399
TYPEISMYSTERY, 1399
TYPEISSUB, 1399
TYPEMERGE, 1428
TYPEMULT, 1423
TYPENORM, 1425
TYPENORM2, 1425
TYPENORM3, 1425
TYPENORM4, 1429
TYPEOPERATION, 1423
TYPEPRINT, 1425
TYPEPUTINSIDE, 1430
TYPEREDEFPRE, 1426
TYPERENUMBER, 1426
TYPEREPEAT, 1423
TYPEREVERSE, 1424
TYPESETEXIT, 1425
TYPESETUSERFLAG, 1431
TYPESORT, 1427
TYPESPLITARG, 1426
TYPESPLITARG2, 1426
TYPESPLITFIRSTARG, 1428
TYPESPLITLASTARG, 1428
TYPESTUFFLE, 1429
TYPESUM, 1424
TYPESUMFIX, 1427
TYPESWITCH, 1431
TYPETERM, 1427
TYPETESTUSE, 1428
TYPETOPOLYNOMIAL, 1430
TYPETOSPECTATOR, 1430

- TYPETRANSFORM, [1430](#)
- TYPETRY, [1426](#)
- TYPEUNRAVEL, [1427](#)
- UNHIDE, [1437](#)
- UNHIDEGEXPRESSION, [1440](#)
- UNHIDELEXPRESSION, [1439](#)
- UNPACK, [1460](#)
- USEDFLAG, [1445](#)
- VARNAMES, [1460](#)
- VARTYPECOMPLEX, [1447](#)
- VARTYPEIMAGINARY, [1448](#)
- VARTYPEMINUS, [1448](#)
- VARTYPENONE, [1447](#)
- VARTYPEROOTOFUNITY, [1448](#)
- VECTBIT, [1454](#)
- VECTOMIN, [1433](#)
- VECTOR, [1404](#)
- VECTOR_, [1444](#)
- VECTORONLY, [1391](#)
- VECTOSUB, [1433](#)
- VECTOVEC, [1433](#)
- VERTEXFUNCTION, [1442](#)
- VORTRANMODE, [1401](#)
- WILDARGFUN, [1413](#)
- WILDARGINDEX, [1422](#)
- WILDARGSYMBOL, [1421](#)
- WILDARGVECTOR, [1422](#)
- WILDCARDS, [1434](#)
- WILDDUMMY, [1432](#)
- WITHAUTO, [1391](#)
- WITHBLOCKS, [1471](#)
- WITHEDGES, [1471](#)
- WITHERROR, [1381](#)
- WITHONEPISETS, [1471](#)
- WITHOUTERROR, [1381](#)
- WITHOUTNODES, [1471](#)
- WITHOUTSEMICOLON, [1386](#)
- WITHSEMICOLON, [1385](#)
- WITHSYMMETRIZEF, [1472](#)
- WITHSYMMETRIZEI, [1471](#)
- WRITEOUT, [1388](#)
- YESLYNDON, [1464](#)
- Z_, [1443](#)
- ZTOHARG, [1464](#)
- full
 - PF_BUFFER, [335](#)
- FullCleanUp
 - declare.h, [924](#)
 - module.c, [1794](#)
- FULLMAX
 - form3.h, [1346](#)
- fullname
 - dbase, [80](#)
 - P_const, [317](#)
- fullnamesize
 - P_const, [321](#)
- FullProto
 - N_const, [248](#)
- FullRenumber
 - declare.h, [968](#)
 - reshuf.c, [2643](#)
- FullSymmetrize
 - declare.h, [880](#)
 - function.c, [1489](#)
- FUN_INFO, [141](#)
 - commute, [142](#)
 - location, [142](#)
 - numargs, [142](#)
 - numfunnies, [142](#)
 - numwildcards, [142](#)
 - symmet, [142](#)
 - tensor, [142](#)
- FunArg
 - T_const, [442](#)
- funargs
 - N_const, [251](#)
- FUNBIT
 - ftypes.h, [1454](#)
- func
 - KEYWORD, [162](#)
 - ReNuMbEr, [384](#)
- FUNCTION
 - ftypes.h, [1405](#)
- FuNcTiOn, [143](#)
 - commute, [144](#)
 - complex, [144](#)
 - dimension, [146](#)
 - flags, [145](#)
 - maxnumargs, [146](#)
 - minnumargs, [146](#)
 - name, [144](#)
 - namesize, [145](#)
 - node, [145](#)
 - number, [144](#)
 - spec, [145](#)
 - symmetric, [145](#)
 - symminfo, [144](#)
 - tabl, [144](#)
- function.c, [1488](#), [1491](#)
 - ChainIn, [1490](#)
 - ChainOut, [1490](#)
 - CompGroup, [1489](#)
 - FullSymmetrize, [1489](#)
 - MakeDirty, [1488](#)
 - MarkDirty, [1488](#)
 - MatchFunction, [1490](#)
 - PolyFunClean, [1489](#)
 - PolyFunDirty, [1489](#)
 - ScanFunctions, [1490](#)
 - SymFind, [1490](#)
 - SymGen, [1489](#)
 - Symmetrize, [1489](#)
- FunctionList
 - C_const, [43](#)
- FUNCTIONONLY
 - ftypes.h, [1391](#)

FUNCTIONS

- structs.h, [2934](#)
- Functions
 - C_const, [46](#)
- functions
 - variable.h, [3233](#)
- FUNCTIONSORT
 - ftypes.h, [1446](#)
- FUNHEAD
 - ftypes.h, [1436](#)
- funinds
 - N_const, [251](#)
- FunInfo
 - N_const, [253](#)
- funisize
 - N_const, [256](#)
- FunLevel
 - declare.h, [852](#)
 - reshuf.c, [2643](#)
- funlocs
 - N_const, [251](#)
- FunMatchCy
 - declare.h, [859](#)
 - symmetr.c, [2964](#)
- FunMatchSy
 - declare.h, [859](#)
 - symmetr.c, [2964](#)
- FunNam
 - FixedGlobals, [135](#)
- funnum
 - ReNuMbEr, [385](#)
- FUNNYDOLLAR
 - ftypes.h, [1445](#)
- FUNNYVEC
 - ftypes.h, [1444](#)
- FUNNYWILD
 - ftypes.h, [1445](#)
- funoffset
 - R_const, [382](#)
- funpowers
 - C_const, [57](#)
- FunScratch
 - N_const, [252](#)
- funsiz
 - NeStInG, [272](#)
- FunSorts
 - N_const, [253](#)
- FUNTOFUN
 - ftypes.h, [1434](#)
- funwith
 - DICTIONARY, [83](#)
- fval
 - OPTIMIZE, [295](#)
- fwin.h, [1513](#), [1515](#)
 - ALTSEPARATOR, [1514](#)
 - CARRIAGEReturn, [1514](#)
 - LINEFEED, [1514](#)
 - P_term, [1514](#)

- PATHSEPARATOR, [1514](#)
- SEPARATOR, [1514](#)
- WITH_ENV, [1515](#)
- WITHRETURN, [1514](#)
- WITHSYSTEM, [1514](#)
- fwrite_cached
 - checkpoint.c, [549](#)
- gamm
 - TrAcEs, [481](#)
- GAMMA
 - ftypes.h, [1407](#)
- GAMMA1
 - ftypes.h, [1444](#)
- GAMMA5
 - ftypes.h, [1444](#)
- gamma5
 - TrAcEs, [482](#)
- GAMMA6
 - ftypes.h, [1444](#)
- GAMMA7
 - ftypes.h, [1444](#)
- GAMMAFIVE
 - ftypes.h, [1407](#)
- GAMMAFUN
 - ftypes.h, [1419](#)
- GAMMAFUNCTION
 - ftypes.h, [1442](#)
- GAMMAI
 - ftypes.h, [1407](#)
- GAMMASEVEN
 - ftypes.h, [1407](#)
- GAMMASIX
 - ftypes.h, [1407](#)
- GarbHand
 - declare.h, [852](#)
 - sort.c, [2759](#)
- gcd
 - Fraction, [140](#)
- gcd_heuristic_failed, [146](#)
- gcd_heuristic_possible
 - polygcd.cc, [2288](#)
- gcd_linear_helper
 - polygcd.cc, [2289](#)
- gcd_mpoly
 - flintinterface.h, [1286](#)
- gcd_poly
 - flintinterface.h, [1286](#)
- GCDclean
 - declare.h, [1014](#)
 - ratio.c, [2539](#)
- GCDFUNCTION
 - ftypes.h, [1412](#)
- GCDfunction
 - declare.h, [1013](#)
 - ratio.c, [2536](#)
- GCDfunction3
 - declare.h, [1013](#)
 - ratio.c, [2536](#)

- GcdLong
 - declare.h, [852](#)
 - reken.c, [2592](#)
- GcdLong_fix_args
 - optimize.cc, [2025](#)
- GCDMAX
 - reken.c, [2585](#)
- GCDterms
 - declare.h, [1014](#)
 - ratio.c, [2538](#)
- gcmmod
 - M_const, [171](#)
- gcNumDollars
 - M_const, [182](#)
- gCnumpows
 - M_const, [185](#)
- gCodesFlag
 - M_const, [179](#)
- gDefDim
 - M_const, [177](#)
- gDefDim4
 - M_const, [177](#)
- GENCOMMUTE
 - ftypes.h, [1455](#)
- GenDiagrams
 - declare.h, [841](#)
 - diawrap.cc, [1069](#)
- GENERALFUNCTION
 - ftypes.h, [1442](#)
- generate
 - MGraph, [208](#)
 - SProcess, [409](#)
 - T_MGraph, [452](#)
- generate_expression
 - optimize.cc, [2035](#)
- generate_instructions
 - optimize.cc, [2028](#)
- generate_output
 - optimize.cc, [2035](#)
- GenerateFactors
 - compiler.c, [732](#)
 - declare.h, [966](#)
- GenerateTopologies
 - declare.h, [841](#)
 - topowrap.cc, [3173](#)
- GenerateVertices
 - topowrap.cc, [3173](#)
- Generator
 - declare.h, [853](#)
 - proces.c, [2463](#)
- GenLoops
 - declare.h, [1035](#)
 - lus.c, [1716](#)
- genNext
 - SGroup, [392](#)
- GENNONCOMMUTE
 - ftypes.h, [1455](#)
- GenPaths
 - declare.h, [1036](#)
 - lus.c, [1717](#)
- GenSpace
 - sOrT, [403](#)
- GenTerms
 - sOrT, [403](#)
- gentopo.cc, [1515](#)
- gentopo.h, [1534](#)
- GenTopologies
 - declare.h, [840](#)
 - diawrap.cc, [1069](#)
- get_brackets
 - optimize.cc, [2022](#)
- get_expression
 - optimize.cc, [2022](#)
- get_variables
 - flintinterface.h, [1286](#)
 - poly, [352](#)
- GetAppendChannel
 - declare.h, [903](#)
 - tools.c, [3116](#)
- GetAutoName
 - declare.h, [895](#)
 - names.c, [1858](#)
- GETBIDENTITY
 - declare.h, [826](#)
- GetBinom
 - declare.h, [854](#)
 - reken.c, [2592](#)
- GETCFROMEXTCHANNEL
 - declare.h, [827](#)
- GetChannel
 - declare.h, [903](#)
 - tools.c, [3116](#)
- GetChar
 - declare.h, [909](#)
 - pre.c, [2349](#)
- GETCOEF
 - declare.h, [807](#)
- GetContent
 - declare.h, [982](#)
 - execute.c, [1172](#)
- getCurrentExternalChannel
 - declare.h, [995](#)
 - extcmd.c, [1206](#)
- GetDbase
 - declare.h, [990](#)
 - minos.c, [1760](#)
- getDef
 - Options, [303](#)
- GetDollar
 - declare.h, [925](#)
 - names.c, [1858](#)
- GetDollarNumber
 - declare.h, [914](#)
 - pre.c, [2364](#)
- GetDolNum
 - declare.h, [973](#)

- dollar.c, [1110](#)
- GetDoParam
 - compcomm.c, [635](#)
 - declare.h, [1012](#)
- GetFile
 - R_const, [379](#)
- GetFirstBracket
 - declare.h, [982](#)
 - execute.c, [1172](#)
- GetFirstTerm
 - declare.h, [982](#)
 - execute.c, [1172](#)
- getFLines
 - EGraph, [108](#)
- GetFloatArgument
 - evaluate.c, [1159](#)
- GetFromSpectator
 - declare.h, [1029](#)
 - spectator.c, [2821](#)
- GetFromStore
 - declare.h, [854](#)
 - store.c, [2864](#)
- GetFromStream
 - declare.h, [892](#)
 - tools.c, [3111](#)
- GetFunction
 - declare.h, [895](#)
 - names.c, [1857](#)
- GETIDENTITY
 - declare.h, [826](#)
- GetIfDollarFactor
 - compcomm.c, [635](#)
 - declare.h, [1012](#)
- GetIfDollarNum
 - declare.h, [844](#)
 - if.c, [1684](#)
- GetInput
 - declare.h, [909](#)
 - pre.c, [2349](#)
- GetLabel
 - declare.h, [965](#)
 - names.c, [1865](#)
- GetLastExprName
 - declare.h, [895](#)
 - names.c, [1857](#)
- getLegParticle
 - Assign, [19](#)
- GetLong
 - declare.h, [854](#)
 - reken.c, [2592](#)
- GetLongModInverses
 - declare.h, [873](#)
 - reken.c, [2591](#)
- GetModInverses
 - declare.h, [872](#)
 - reken.c, [2590](#)
- GetMoreFromMem
 - declare.h, [855](#)
- store.c, [2864](#)
- GetMoreTerms
 - declare.h, [855](#)
 - store.c, [2864](#)
- GetName
 - declare.h, [894](#)
 - names.c, [1857](#)
- GetNode
 - declare.h, [894](#)
 - names.c, [1857](#)
- GetNumber
 - declare.h, [895](#)
 - names.c, [1857](#)
- getOldDef
 - Options, [303](#)
- GetOName
 - declare.h, [896](#)
 - names.c, [1858](#)
- GetOneFile
 - R_const, [380](#)
- GetOneTerm
 - declare.h, [855](#)
 - store.c, [2864](#)
- GetPiArgument
 - evaluate.c, [1159](#)
- GetPID
 - form3.h, [1349](#)
- GetPosFile
 - declare.h, [902](#)
 - tools.c, [3115](#)
- getpower
 - optimize.cc, [2024](#)
- GetPreVar
 - declare.h, [907](#)
 - pre.c, [2350](#)
- getQGDef
 - Options, [303](#)
- GetRunningTime
 - declare.h, [869](#)
 - startup.c, [2834](#)
- GetSetupPar
 - declare.h, [908](#)
 - setfile.c, [2724](#)
- GETSTOP
 - declare.h, [807](#)
- GetStreamPosition
 - declare.h, [930](#)
 - tools.c, [3112](#)
- GetTable
 - declare.h, [855](#)
 - store.c, [2866](#)
- GetTableName
 - declare.h, [993](#)
 - minos.c, [1761](#)
- GETTERM
 - declare.h, [827](#)
- GetTerm
 - declare.h, [855](#)

- store.c, [2863](#)
- getValue
 - Options, [301](#)
- GetVar
 - declare.h, [895](#)
 - names.c, [1858](#)
- GetWildcardName
 - declare.h, [929](#)
 - names.c, [1860](#)
- gextrasym
 - M_const, [173](#)
- gextrasymbols
 - M_const, [190](#)
- gFinalStats
 - M_const, [180](#)
- GFIVE
 - ftypes.h, [1450](#)
- gFortran90Kind
 - M_const, [172](#)
- gfunpowers
 - M_const, [178](#)
- ggextrasym
 - M_const, [173](#)
- ggextrasymbols
 - M_const, [190](#)
- ggFinalStats
 - M_const, [180](#)
- ggIndentSpace
 - M_const, [190](#)
- ggNoSpacesInNumbers
 - M_const, [182](#)
- ggnumextrasym
 - M_const, [183](#)
- ggOldFactArgFlag
 - M_const, [183](#)
- ggOldGCDflag
 - M_const, [183](#)
- ggOldParallelStats
 - M_const, [181](#)
- ggProcessStats
 - M_const, [181](#)
- ggShortStatsMax
 - M_const, [190](#)
- ggStatsFlag
 - M_const, [186](#)
- ggThreadBalancing
 - M_const, [180](#)
- ggThreadBucketSize
 - M_const, [176](#)
- ggThreadsFlag
 - M_const, [180](#)
- ggThreadSortFileSynch
 - M_const, [181](#)
- ggThreadStats
 - M_const, [180](#)
- ggWTimeStatsFlag
 - M_const, [184](#)
- gld
 - T_EGraph, [448](#)
- GIDENT
 - ftypes.h, [1450](#)
- gIndentSpace
 - M_const, [190](#)
- ginsidefirst
 - M_const, [177](#)
- glsFortran90
 - M_const, [182](#)
- gLineLength
 - M_const, [186](#)
- GLOBAL
 - ftypes.h, [1454](#)
- GLOBALEXPRESSION
 - ftypes.h, [1438](#)
- GlobalFunctions
 - variable.h, [3235](#)
- GlobalIndices
 - variable.h, [3235](#)
- Globalize
 - declare.h, [929](#)
 - names.c, [1866](#)
- GLOBALMODULE
 - ftypes.h, [1383](#)
- globalnamefill
 - NaMeTree, [268](#)
- globalnodefill
 - NaMeTree, [268](#)
- GlobalSetElements
 - variable.h, [3235](#)
- GlobalSets
 - variable.h, [3235](#)
- GLOBALSPECTATORFLAG
 - ftypes.h, [1470](#)
- GlobalSymbols
 - variable.h, [3235](#)
- GlobalVectors
 - variable.h, [3235](#)
- Glue
 - declare.h, [855](#)
 - ratio.c, [2536](#)
- GMINUS
 - ftypes.h, [1451](#)
- gmodmode
 - M_const, [185](#)
- GMPSREAD
 - float.c, [1300](#)
- gNamesFlag
 - M_const, [179](#)
- gncmod
 - M_const, [184](#)
- gNoSpacesInNumbers
 - M_const, [182](#)
- gnpowmod
 - M_const, [184](#)
- GNUC_PREREQ
 - parallel.h, [2171](#)
- gNumDictionaries

- O_const, [287](#)
- gnumelements
 - DICTIONARY, [83](#)
- gnumextrasym
 - M_const, [183](#)
- gNumPre
 - P_const, [321](#)
- gOldFactArgFlag
 - M_const, [182](#)
- gOldGCDflag
 - M_const, [183](#)
- gOldParallelStats
 - M_const, [181](#)
- gOutNumberType
 - M_const, [185](#)
- gOutputMode
 - M_const, [185](#)
- gOutputSpaces
 - M_const, [185](#)
- gparallelflag
 - M_const, [179](#)
- GPLUS
 - ftypes.h, [1451](#)
- gPolyFun
 - M_const, [188](#)
- gPolyFunExp
 - M_const, [189](#)
- gPolyFunInv
 - M_const, [189](#)
- gPolyFunPow
 - M_const, [189](#)
- gPolyFunType
 - M_const, [189](#)
- gPolyFunVar
 - M_const, [189](#)
- gpowmod
 - M_const, [171](#)
- gProcessBucketSize
 - M_const, [175](#)
- gProcessStats
 - M_const, [181](#)
- gproperorderflag
 - M_const, [179](#)
- grcc.cc, [1536](#)
- grcc.h, [1663](#)
- grccmodel
 - MoDeL, [236](#)
- grccparam.h, [1680](#)
- GREATER
 - ftypes.h, [1452](#)
- GREATEREQUAL
 - ftypes.h, [1452](#)
- greedymaxperc
 - OPTIMIZE, [297](#)
- greedyminnum
 - OPTIMIZE, [296](#)
- greedytimelimit
 - OPTIMIZE, [296](#)
- group
 - MGraph, [211](#)
- groupLMom
 - EGraph, [107](#)
- gShortStatsMax
 - M_const, [190](#)
- gSizeCommuteInSet
 - M_const, [179](#)
- gSortType
 - M_const, [179](#)
- gStatsFlag
 - M_const, [178](#)
- gSubId
 - EGraph, [110](#)
- gThreadBalancing
 - M_const, [180](#)
- gThreadBucketSize
 - M_const, [175](#)
- gThreadsFlag
 - M_const, [180](#)
- gThreadSortFileSynch
 - M_const, [181](#)
- gThreadStats
 - M_const, [180](#)
- gTokensWriteFlag
 - M_const, [178](#)
- gUniTrace
 - M_const, [185](#)
- gUnitTrace
 - M_const, [185](#)
- gWTimeStatsFlag
 - M_const, [183](#)
- gzipCompress
 - R_const, [378](#)
- GZIPDEFAULT
 - fsizes.h, [1363](#)
- HAAKJE
 - ftypes.h, [1406](#)
- HAAKJE0
 - ftypes.h, [1405](#)
- halfmod
 - C_const, [48](#)
- Handle
 - FiLeDaTa, [132](#)
- handle
 - ChAnNeL, [75](#)
 - dbase, [79](#)
 - FiLe, [130](#)
 - Stream, [423](#)
- HANDLERS, [146](#)
 - newhandle, [147](#)
 - newlogonly, [147](#)
 - oldhandle, [147](#)
 - oldlogonly, [147](#)
 - oldprinttype, [147](#)
 - oldsilent, [147](#)
- hash
 - node, [275](#)

- hash_range
 - optimize.cc, [2027](#)
- havesortdir
 - M_const, [191](#)
- HEADERFILE
 - ftypes.h, [1383](#)
- headermark
 - STOREHEADER, [418](#)
- headnode
 - NaMeTree, [268](#)
- helptb
 - tables.c, [2998](#)
- hi
 - VaRrEnUm, [488](#)
- HIDDENGEXPRESSION
 - ftypes.h, [1439](#)
- HIDDENLEXPRESSION
 - ftypes.h, [1439](#)
- HIDE
 - ftypes.h, [1437](#)
- hidefile
 - R_const, [376](#)
- HIDEGEXPRESSION
 - ftypes.h, [1439](#)
- HideLevel
 - C_const, [68](#)
- hidelevel
 - ExPrEsSiOn, [122](#)
- HIDELEXPRESSION
 - ftypes.h, [1439](#)
- HideSize
 - M_const, [173](#)
- highfirst
 - setfile.c, [2727](#)
- HighWarning
 - declare.h, [890](#)
 - message.c, [1743](#)
- HoldFlag
 - M_const, [187](#)
- horner
 - OPTIMIZE, [295](#)
- Horner_tree
 - optimize.cc, [2027](#)
- hornerdirection
 - OPTIMIZE, [296](#)
- HowMany
 - declare.h, [988](#)
 - if.c, [1684](#)
- hparallelflag
 - M_const, [179](#)
- HPLFUNCTION
 - ftypes.h, [1419](#)
- hProcessBucketSize
 - M_const, [175](#)
- HTOZARG
 - ftypes.h, [1464](#)
- humanBytesSuffix
 - sort.c, [2764](#)
- HumanStatsFlag
 - C_const, [62](#)
- HumanString
 - sort.c, [2750](#)
- HUMANSTRLEN
 - sort.c, [2749](#)
- HUMANSUFFLEN
 - sort.c, [2749](#)
- humanTermsSuffix
 - sort.c, [2764](#)
- i
 - bufIPstruct, [37](#)
- iblocks
 - dbase, [79](#)
- iBufError
 - P_const, [319](#)
- iBuffer
 - C_const, [49](#)
- iBufferSize
 - C_const, [53](#)
- icode
 - lInput, [148](#)
 - Interaction, [161](#)
- id
 - EEdge, [98](#)
 - ENode, [117](#)
 - Interaction, [160](#)
 - MNode, [221](#)
 - Particle, [329](#)
 - Process, [370](#)
 - SProcess, [413](#)
 - T_MNode, [457](#)
- idallflag
 - T_const, [439](#)
- idallmaxnum
 - T_const, [439](#)
- idallnum
 - T_const, [439](#)
- IDFUNCTION
 - ftypes.h, [1416](#)
- idfunctionflag
 - N_const, [261](#)
- IDHEAD
 - ftypes.h, [1450](#)
- idoption
 - C_const, [56](#)
- iexp
 - declare.h, [905](#)
 - tools.c, [3123](#)
- if.c, [1683](#), [1686](#)
 - DoEndSwitch, [1684](#)
 - DolfStatement, [1684](#)
 - DoSwitch, [1684](#)
 - DoubleIfBuffers, [1684](#)
 - DoubleSwitchBuffers, [1685](#)
 - FindCase, [1685](#)
 - FindVar, [1684](#)
 - GetIfDollarNum, [1684](#)

- HowMany, 1684
- SwitchSplitMerge, 1685
- SwitchSplitMergeRec, 1685
- IfCount
 - C_const, 48
- IFDOLLAR
 - ftypes.h, 1451
- IFDOLLAREXTRA
 - ftypes.h, 1452
- IFEXPRESSION
 - ftypes.h, 1452
- IFFLOATNUMBER
 - ftypes.h, 1452
- IfHeap
 - C_const, 48
- IFISFACTORIZED
 - ftypes.h, 1452
- IfLevel
 - C_const, 67
- iflevel
 - SWITCH, 427
- IFOCCURS
 - ftypes.h, 1452
- IfStack
 - C_const, 49
- IfSumCheck
 - C_const, 52
- IFUSERFLAG
 - ftypes.h, 1452
- IFW
 - flintinterface.cc, 1255
- IgnoreDeprecation
 - M_const, 191
- Input, 148
 - cvallist, 149
 - icode, 148
 - name, 148
 - nplistn, 148
 - plistic, 149
 - plistn, 148
- ilist
 - NCand, 270
 - NStack, 279
- IMPLODEARG
 - ftypes.h, 1462
- improve
 - optimization, 294
- INANDOUT
 - minos.h, 1782
- inbuffer
 - FiLe, 130
 - StreaM, 423
- IncDir
 - M_const, 172
- incdollar
 - DoLoOp, 92
- INCEXPRESSION
 - ftypes.h, 1439
- INCLENG
 - declare.h, 807
- Include
 - declare.h, 913
 - pre.c, 2354
- incMat
 - MNodeClass, 224
 - T_MNodeClass, 460
- incnum
 - DoLoOp, 91
- incoef
 - SHvariables, 395
- IndDum
 - M_const, 184
 - N_const, 261
- INDENTSPACE
 - fsizes.h, 1364
- IndentSpace
 - O_const, 287
- INDEX
 - ftypes.h, 1404
- InDeX, 149
 - dimension, 150
 - flags, 150
 - name, 149
 - namesize, 150
 - nmin4, 150
 - node, 150
 - number, 150
 - type, 149
- Index
 - FiLeDaTa, 131
- index
 - DoLIaRS, 88
 - OptQGRef, 308
 - PF_BUFFER, 335
- index.c, 1700, 1701
 - ClearBracketIndex, 1701
 - FindBracket, 1700
 - OpenBracketIndex, 1701
 - PutBracketInIndex, 1700
 - PutInside, 1701
- INDEX_
 - ftypes.h, 1443
- indexblock, 151
 - flags, 151
 - objects, 151
 - position, 151
 - previousblock, 151
- indexbuffer
 - BrAcKeTiNfO, 35
- indexbufferize
 - BrAcKeTiNfO, 36
- INDEXENTRY
 - structs.h, 2933
- InDeXeNtRy, 152
 - CompressSize, 153
 - length, 153

- name, [154](#)
- nfunctions, [154](#)
- nindices, [153](#)
- nsymbols, [153](#)
- nvectors, [154](#)
- position, [153](#)
- size, [154](#)
- variables, [153](#)
- indexfill
 - BrAcKeTiNfO, [36](#)
- IndexList
 - C_const, [44](#)
- INDEXONLY
 - ftypes.h, [1391](#)
- indi
 - ReNuMbEr, [384](#)
- Indices
 - C_const, [46](#)
- indices
 - parallel.h, [2172](#)
 - variable.h, [3233](#)
- indnum
 - ReNuMbEr, [385](#)
- INDTOIND
 - ftypes.h, [1433](#)
- INDTOSUB
 - ftypes.h, [1433](#)
- inexprlevel
 - C_const, [65](#)
- inexprstack
 - C_const, [53](#)
- inexprsumcheck
 - C_const, [64](#)
- InFbrack
 - O_const, [288](#)
- infile
 - R_const, [376](#)
- INFILEINDEX
 - structs.h, [2932](#)
- info
 - dbase, [78](#)
- InFunction
 - declare.h, [856](#)
 - proces.c, [2459](#)
- InHiBuf
 - R_const, [378](#)
- inicbufs
 - comtool.c, [770](#)
 - declare.h, [903](#)
- inictable
 - compiler.c, [730](#)
 - declare.h, [903](#)
- IniFbuffer
 - comtool.c, [774](#)
 - declare.h, [1013](#)
- iniinfo, [155](#)
 - entriesinindex, [155](#)
 - firstindexblock, [155](#)
 - firstnameblock, [156](#)
 - lastindexblock, [155](#)
 - lastnameblock, [156](#)
 - numberofindexblocks, [155](#)
 - numberofnamesblocks, [156](#)
 - numberoftables, [155](#)
- IniLine
 - declare.h, [857](#)
 - sch.c, [2685](#)
- INILOCK
 - declare.h, [824](#)
- IniModule
 - declare.h, [910](#)
 - pre.c, [2351](#)
- InInBuf
 - R_const, [377](#)
- INIRWLOCK
 - declare.h, [825](#)
- IniSpecialModule
 - declare.h, [910](#)
 - pre.c, [2351](#)
- init
 - MCBlock, [193](#)
 - MConn, [198](#)
 - MCOpI, [204](#)
 - MGraph, [208](#)
 - MNodeClass, [223](#)
 - T_EGraph, [447](#)
 - T_MNodeClass, [459](#)
- initAss
 - ENode, [116](#)
- initCEdges
 - MConn, [198](#)
- initlc
 - FGInput, [127](#)
- initln
 - FGInput, [127](#)
- initlPart
 - Process, [370](#)
- INITNAMESIZE
 - fsizes.h, [1358](#)
- INITNODESIZE
 - fsizes.h, [1358](#)
- iniTools
 - declare.h, [1005](#)
 - tools.c, [3120](#)
- initPerm
 - MOrbits, [240](#)
- initPresetExternalChannels
 - declare.h, [994](#)
 - extcmd.c, [1206](#)
- InitRecovery
 - checkpoint.c, [548](#)
 - declare.h, [1002](#)
- inivar.h, [1710](#), [1711](#)
 - A, [1710](#)
 - BufferForOutput, [1711](#)
 - FG, [1710](#)

- fixedsets, [1710](#)
- setupfilename, [1711](#)
- IniVars
 - declare.h, [857](#)
 - startup.c, [2833](#)
- iniwranf
 - declare.h, [997](#)
 - reken.c, [2595](#)
- inline
 - form3.h, [1344](#)
- inlist
 - TrAcEn, [477](#)
 - TrAcEs, [479](#)
- inmem
 - ExPrEsSiOn, [122](#)
- InnerTest
 - C_const, [64](#)
- inNum
 - sOrT, [405](#)
- InNumMem
 - T_const, [438](#)
- InOutBuf
 - P_const, [319](#)
- inparallelflag
 - C_const, [60](#)
- inPatches
 - sOrT, [401](#)
- inprimelist
 - T_const, [444](#)
- InputFileName
 - M_const, [172](#)
- INPUTONLY
 - minos.h, [1782](#)
- INPUTOUT
 - ftypes.h, [1388](#)
- INPUTSTREAM
 - ftypes.h, [1382](#)
- inscbuf
 - INSIDEINFO, [158](#)
- inscheme
 - O_const, [284](#)
- InScratch
 - N_const, [255](#)
- InScratch1
 - N_const, [255](#)
- InsertArg
 - argument.c, [497](#)
 - declare.h, [936](#)
- InsertTerm
 - declare.h, [857](#)
 - proces.c, [2460](#)
- inside
 - P_const, [317](#)
- InsideDollar
 - declare.h, [979](#)
 - dollar.c, [1105](#)
- insidefirst
 - C_const, [55](#)
- INSIDEINFO, [156](#)
 - buffer, [157](#)
 - inscbuf, [158](#)
 - numdollars, [157](#)
 - oldcbuf, [157](#)
 - oldnumlhs, [158](#)
 - oldcompiletype, [157](#)
 - oldnumpotmoddollars, [157](#)
 - oldparallelflag, [157](#)
 - oldrbuf, [158](#)
 - size, [157](#)
- insidelevel
 - C_const, [65](#)
- insidestack
 - C_const, [52](#)
- insidesumcheck
 - C_const, [64](#)
- INSLENGTH
 - sort.c, [2749](#)
- InsTableTree
 - declare.h, [977](#)
 - tables.c, [2993](#)
- InsTree
 - comtool.c, [773](#)
 - declare.h, [966](#)
- insubexpbuffers
 - compiler.c, [733](#)
- integer_lcoeff
 - poly, [350](#)
- IntegerToFloat
 - float.c, [1302](#)
- IntegerToFloattr
 - evaluate.c, [1158](#)
- Interact
 - M_const, [176](#)
- Interaction, [158](#)
 - ~Interaction, [159](#)
 - clist, [160](#)
 - csum, [160](#)
 - icode, [161](#)
 - id, [160](#)
 - Interaction, [159](#)
 - loop, [161](#)
 - mdl, [160](#)
 - name, [160](#)
 - nclist, [161](#)
 - nlegs, [161](#)
 - nplist, [161](#)
 - nslist, [161](#)
 - plist, [160](#)
 - prInteraction, [160](#)
 - slist, [160](#)
- interacts
 - Model, [233](#)
- internalset
 - TERMINFO, [472](#)
- INTFUNCTION
 - ftypes.h, [1410](#)

INTOHIDE
 ftypes.h, 1437
 INTOHIDEGEXPRESSION
 ftypes.h, 1440
 INTOHIDELEXPRESSION
 ftypes.h, 1440
 intPart
 Model, 233
 intracestack
 N_const, 257
 intrct
 DNode, 86
 ENode, 118
 INUSE
 ftypes.h, 1467
 inverse_poly
 flintinterface.h, 1286
 INVERSEFACTORIAL
 ftypes.h, 1409
 INVERSEFUNCTION
 ftypes.h, 1416
 INVERSETABLE
 ftypes.h, 1459
 invertices
 MoDeL, 236
 invfacnum
 M_const, 188
 InvPoly
 declare.h, 1017
 ratio.c, 2540
 iPatches
 sOrT, 402
 iPointer
 C_const, 49
 iranf
 declare.h, 997
 reken.c, 2596
 is_dense_univariate
 poly, 349
 is_integer
 poly, 349
 is_monomial
 poly, 349
 is_one
 poly, 349
 is_zero
 poly, 349
 IsBracket
 O_const, 288
 ISCOMPRESSED
 ftypes.h, 1447
 isConnected
 MGraph, 209
 isEq
 Fraction, 140
 ISEQUALPOS
 declare.h, 819
 ISEQUALPOSINC
 declare.h, 817
 IsExponentSign
 declare.h, 1026
 dict.c, 1084
 isExternal
 EGraph, 105
 MGraph, 208
 ISFACTORIZED
 ftypes.h, 1447
 isFermion
 EGraph, 106
 ISFORTRAN90
 ftypes.h, 1402
 IsFortran90
 C_const, 61
 ISGEPOS
 declare.h, 820
 ISGEPOSINC
 declare.h, 817
 IsIdStatement
 compiler.c, 731
 declare.h, 962
 ISINRHS
 ftypes.h, 1447
 isIsomorphic
 Assign, 22
 MGraph, 209
 ISLESSPOS
 declare.h, 819
 IsLikeVector
 declare.h, 906
 tools.c, 3123
 ISLYNDON
 ftypes.h, 1463
 ISLYNDONR
 ftypes.h, 1463
 ISMINPOS
 declare.h, 819
 IsMultipleOf
 declare.h, 984
 dollar.c, 1106
 IsMultiplySign
 declare.h, 1027
 dict.c, 1084
 ISNEGPOS
 declare.h, 820
 isNeutral
 Particle, 329
 isnextchar
 StreaM, 424
 ISNOTEQUALPOS
 declare.h, 819
 ISNOTFORTRAN90
 ftypes.h, 1402
 ISNOTZEROPOS
 declare.h, 820
 isOptE
 EGraph, 105

- isOptM
 - MGraph, [210](#)
- isOrdLegs
 - Assign, [22](#)
- isOrdPLeg
 - Assign, [21](#)
- ISPOSPOS
 - declare.h, [820](#)
- IsRHS
 - compiler.c, [731](#)
 - declare.h, [962](#)
- IsSetMember
 - declare.h, [984](#)
 - dollar.c, [1106](#)
- iStop
 - C_const, [49](#)
- ISUNMODIFIED
 - ftypes.h, [1446](#)
- ISYMBOL
 - ftypes.h, [1420](#)
- ISZERO
 - ftypes.h, [1446](#)
- ISZEROPOS
 - declare.h, [820](#)
- ival
 - OPTIMIZE, [295](#)
- j3
 - TrAcEs, [480](#)
- j4
 - TrAcEs, [480](#)
- JUMPRATIO
 - fsizes.h, [1365](#)
- jumpratio
 - M_const, [184](#)
- KEEPZERO
 - ftypes.h, [1447](#)
- KeptInHold
 - R_const, [379](#)
- KEYWORD, [162](#)
 - flags, [162](#)
 - func, [162](#)
 - name, [162](#)
 - type, [162](#)
- KEYWORDV, [163](#)
 - flags, [163](#)
 - name, [163](#)
 - type, [163](#)
 - var, [163](#)
- KILL
 - pre.c, [2348](#)
- KILLALL
 - pre.c, [2348](#)
- killSignal
 - X_const, [492](#)
- killWholeGroup
 - X_const, [493](#)
- klow
 - ENode, [118](#)
- kstep
 - TrAcEs, [481](#)
- ktoi
 - sOrT, [401](#)
- l
 - node, [274](#)
- LabelNames
 - C_const, [49](#)
- Labels
 - C_const, [50](#)
- LargeSize
 - sOrT, [402](#)
- last
 - SeTs, [389](#)
- last_monomial
 - poly, [354](#)
- last_monomial_index
 - poly, [354](#)
- lastdollar
 - DoLoOp, [92](#)
- lastindexblock
 - iniinfo, [155](#)
- lastLen
 - longMultiStruct, [167](#)
- lastnameblock
 - iniinfo, [156](#)
- lastnamespace
 - P_const, [317](#)
- lastnum
 - DoLoOp, [91](#)
- LBRACE
 - ftypes.h, [1396](#)
- lBuffer
 - sOrT, [399](#)
- lc3
 - TrAcEs, [482](#)
- lc4
 - TrAcEs, [482](#)
- LcmLong
 - declare.h, [853](#)
 - reken.c, [2593](#)
- lcoeff_multivar
 - poly, [351](#)
- lcoeff_univar
 - poly, [351](#)
- lDefDim
 - C_const, [55](#)
- lDefDim4
 - C_const, [55](#)
- LeaveNegative
 - T_const, [441](#)
- left
 - NaMeNode, [263](#)
 - NoDe, [276](#)
 - tree, [484](#)
- legcouple
 - MoDeL, [236](#)

- TERMINFO, 471
- legEdgeParticle
 - Assign, 19
- legPart
 - Assign, 20
- legParticle
 - EGraph, 108
- length
 - InDeXeNtRy, 153
- lenLONG
 - STOREHEADER, 418
- lenPOINTER
 - STOREHEADER, 418
- lenPOS
 - STOREHEADER, 418
- lenWORD
 - STOREHEADER, 418
- LESS
 - ftypes.h, 1453
- LESSEQUAL
 - ftypes.h, 1453
- level
 - R_const, 381
 - SHvariables, 397
 - TERMINFO, 472
 - TrAcEn, 477
 - TrAcEs, 483
- LEVICIVITA
 - ftypes.h, 1408
- IFill
 - sOrT, 399
- lhdollarerror
 - P_const, 321
- lhdollarflag
 - C_const, 61
- lhs
 - CbUf, 72
 - DICTIONARY_ELEMENT, 84
- LHSIDE
 - ftypes.h, 1400
- LHSIDEX
 - ftypes.h, 1400
- LI2FUNCTION
 - ftypes.h, 1415
- lijst
 - LIST, 164
- LINEFEED
 - fwin.h, 1514
 - unix.h, 3224
- LineLength
 - C_const, 68
- linenumber
 - StreaM, 421
- LINFUNCTION
 - ftypes.h, 1415
- LinkTree
 - declare.h, 896
 - names.c, 1859
- LIST, 164
 - lijst, 164
 - maxnum, 164
 - message, 164
 - num, 164
 - numclear, 165
 - numglobal, 165
 - numtemp, 165
 - size, 165
- LISTEDLOOP
 - ftypes.h, 1389
- listinprint
 - N_const, 253
- ListPoly
 - T_const, 437
- ListSymbols
 - T_const, 437
- ListSymbolsSize
 - T_const, 440
- lloser
 - NoDe, 276
- lmom
 - EEdge, 99
- ln2
 - evaluate.c, 1160
- LNFUNCTION
 - ftypes.h, 1413
- LNUMBER
 - ftypes.h, 1406
- lo
 - VaRrEnUm, 488
- LOADDOLLAR
 - ftypes.h, 1435
- LoadInputFile
 - declare.h, 909
 - tools.c, 3111
- LoadInstruction
 - declare.h, 911
 - pre.c, 2351
- loadmode
 - PROCEDURE, 367
- LoadModel
 - declare.h, 1034
 - diawrap.cc, 1068
- LoadStatement
 - declare.h, 911
 - pre.c, 2351
- LocalConvertToPoly
 - declare.h, 1010
 - notation.c, 1971
- LOCALEXPRESSION
 - ftypes.h, 1438
- LocateBase
 - declare.h, 877
 - minos.c, 1759
- LocateFile
 - declare.h, 893
 - tools.c, 3111

- location
 - FUN_INFO, [142](#)
- LOCK
 - declare.h, [824](#)
- locwildvalue
 - T_const, [442](#)
- log
 - ParallelVars, [325](#)
- LogFileName
 - M_const, [172](#)
- LogHandle
 - C_const, [68](#)
- LogType
 - M_const, [186](#)
- LONG
 - form3.h, [1350](#)
- LONG_MAX_VALUE
 - form3.h, [1345](#)
- LONG_MIN_VALUE
 - form3.h, [1345](#)
- LongCopy
 - declare.h, [926](#)
 - tools.c, [3119](#)
- LongLongCopy
 - declare.h, [926](#)
 - tools.c, [3119](#)
- longMultiStruct, [166](#)
 - buffer, [166](#)
 - bufpos, [166](#)
 - lastLen, [167](#)
 - next, [167](#)
 - nPacks, [166](#)
 - packpos, [166](#)
- LONGNUMBER
 - ftypes.h, [1451](#)
- LongToLine
 - declare.h, [858](#)
 - sch.c, [2686](#)
- LOOKINGFORELSE
 - ftypes.h, [1386](#)
- LOOKINGFORENDIF
 - ftypes.h, [1386](#)
- LookInStream
 - declare.h, [892](#)
 - tools.c, [3111](#)
- loop
 - Interaction, [161](#)
 - MCBlock, [193](#)
 - MCOpI, [205](#)
 - Process, [371](#)
 - SProcess, [413](#)
- LoopList
 - P_const, [316](#)
- loopm
 - EGraph, [114](#)
- LoopOutput
 - declare.h, [1035](#)
 - lus.c, [1716](#)
- LowerSortLevel
 - declare.h, [978](#)
 - sort.c, [2763](#)
- lowfirst
 - setfile.c, [2727](#)
- LPARENTHESIS
 - ftypes.h, [1396](#)
- IPatch
 - sOrT, [404](#)
- IPolyFun
 - C_const, [68](#)
- IPolyFunExp
 - C_const, [69](#)
- IPolyFunInv
 - C_const, [68](#)
- IPolyFunPow
 - C_const, [69](#)
- IPolyFunType
 - C_const, [69](#)
- IPolyFunVar
 - C_const, [69](#)
- LRPARENTHESSES
 - ftypes.h, [1398](#)
- ISortType
 - C_const, [58](#)
- lsrc
 - NoDe, [276](#)
- ITop
 - sOrT, [399](#)
- IUniTrace
 - C_const, [64](#)
- IUnitTrace
 - C_const, [66](#)
- Lus
 - declare.h, [968](#)
 - lus.c, [1715](#)
- lus.c, [1715](#), [1718](#)
 - AllLoops, [1716](#)
 - AllOnePI, [1717](#)
 - AllPaths, [1717](#)
 - FindLus, [1715](#)
 - GenLoops, [1716](#)
 - GenPaths, [1717](#)
 - LoopOutput, [1716](#)
 - Lus, [1715](#)
 - OutputOnePI, [1718](#)
 - PathOutput, [1717](#)
 - RemoveBridges, [1717](#)
 - SortTheList, [1716](#)
 - StartLoops, [1716](#)
 - TakeOneLine, [1718](#)
- IWorkPointer
 - T_const, [438](#)
- IWorkSize
 - R_const, [378](#)
- IWorkSpace
 - T_const, [434](#)
- M

- AllGlobals, 10
- m
- MODNUM, 237
- M_alloc
 - declare.h, 826
- M_check1
 - declare.h, 984
 - tools.c, 3121
- M_const, 167
 - atstartup, 189
 - BracketFactors, 191
 - ClearStore, 191
 - CompressSize, 173
 - countfunnum, 188
 - dbufnum, 178
 - denomnum, 187
 - dollarzero, 189
 - DumInd, 184
 - exitflag, 189
 - expnum, 187
 - facnum, 187
 - fbuffersize, 182
 - FileOnlyFlag, 176
 - FortranCont, 187
 - FromStdin, 191
 - gcmmod, 171
 - gcNumDollars, 182
 - gCnumpows, 185
 - gCodesFlag, 179
 - gDefDim, 177
 - gDefDim4, 177
 - gextrasym, 173
 - gextrasymbols, 190
 - gFinalStats, 180
 - gFortran90Kind, 172
 - gfunpowers, 178
 - ggextrasym, 173
 - ggextrasymbols, 190
 - ggFinalStats, 180
 - ggIndentSpace, 190
 - ggNoSpacesInNumbers, 182
 - ggnumextrasym, 183
 - ggOldFactArgFlag, 183
 - ggOldGCDflag, 183
 - ggOldParallelStats, 181
 - ggProcessStats, 181
 - ggShortStatsMax, 190
 - ggStatsFlag, 186
 - ggThreadBalancing, 180
 - ggThreadBucketSize, 176
 - ggThreadsFlag, 180
 - ggThreadSortFileSynch, 181
 - ggThreadStats, 180
 - ggWTimeStatsFlag, 184
 - gIndentSpace, 190
 - ginsidefirst, 177
 - gIsFortran90, 182
 - gLineLength, 186
 - gmodmode, 185
 - gNamesFlag, 179
 - gncmod, 184
 - gNoSpacesInNumbers, 182
 - gnpowmod, 184
 - gnumextrasym, 183
 - gOldFactArgFlag, 182
 - gOldGCDflag, 183
 - gOldParallelStats, 181
 - gOutNumberType, 185
 - gOutputMode, 185
 - gOutputSpaces, 185
 - gparallelflag, 179
 - gPolyFun, 188
 - gPolyFunExp, 189
 - gPolyFunInv, 189
 - gPolyFunPow, 189
 - gPolyFunType, 189
 - gPolyFunVar, 189
 - gpowmod, 171
 - gProcessBucketSize, 175
 - gProcessStats, 181
 - gproperorderflag, 179
 - gShortStatsMax, 190
 - gSizeCommuteInSet, 179
 - gSortType, 179
 - gStatsFlag, 178
 - gThreadBalancing, 180
 - gThreadBucketSize, 175
 - gThreadsFlag, 180
 - gThreadSortFileSynch, 181
 - gThreadStats, 180
 - gTokensWriteFlag, 178
 - gUniTrace, 185
 - gUnitTrace, 185
 - gWTimeStatsFlag, 183
 - havesortdir, 191
 - HideSize, 173
 - HoldFlag, 187
 - hparallelflag, 179
 - hProcessBucketSize, 175
 - IgnoreDeprecation, 191
 - IncDir, 172
 - IndDum, 184
 - InputFileName, 172
 - Interact, 176
 - invfacnum, 188
 - jumpratio, 184
 - LogFileName, 172
 - LogType, 186
 - matchfunnum, 188
 - MaxBracketBufferSize, 174
 - maxFlevels, 181
 - MaxParLevel, 176
 - MaxStreamSize, 174
 - MaxTal, 184
 - MaxTer, 173
 - MaxWildcards, 185

- mTraceDum, [186](#)
- MultiRun, [182](#)
- NumFixedFunctions, [177](#)
- NumFixedSets, [177](#)
- NumSpectatorFiles, [183](#)
- NumStoreCaches, [190](#)
- OffsetIndex, [186](#)
- OffsetVector, [186](#)
- OldChildTime, [175](#)
- OldMilliTime, [175](#)
- oldnumextrasymbols, [173](#)
- OldOrderFlag, [188](#)
- OldSecTime, [175](#)
- onerhs, [191](#)
- Ordering, [187](#)
- OutBuffer, [172](#)
- OutBufSize, [176](#)
- Path, [172](#)
- PrintTotalSize, [182](#)
- qError, [186](#)
- rbufnum, [178](#)
- RepMax, [186](#)
- resetTimeOnClear, [181](#)
- S0, [171](#)
- sbufnum, [178](#)
- ScratSize, [173](#)
- SetupDir, [172](#)
- SetupFile, [172](#)
- shmWinSize, [175](#)
- silent, [187](#)
- SIOsize, [174](#)
- SizeForSpectatorFiles, [183](#)
- SizeStoreCache, [174](#)
- SkipClears, [178](#)
- SLargeSize, [174](#)
- SMaxFpatches, [177](#)
- SMaxPatches, [177](#)
- SpectatorFiles, [173](#)
- SpectatorSize, [176](#)
- SSmallEsize, [174](#)
- SSmallSize, [174](#)
- StdOut, [177](#)
- STermsInSmall, [174](#)
- sumnum, [188](#)
- sumpnum, [188](#)
- SumTime, [176](#)
- TempDir, [171](#)
- TempSortDir, [171](#)
- termfunnum, [188](#)
- TimeLimit, [176](#)
- totalnumberofthreads, [179](#)
- tracebackflag, [187](#)
- vectorzero, [191](#)
- Willnd, [184](#)
- WorkSize, [175](#)
- zbufnum, [178](#)
- zeropos, [171](#)
- zerorhs, [191](#)
- M_free
 - declare.h, [928](#)
 - tools.c, [3121](#)
- M_print
 - declare.h, [984](#)
 - tools.c, [3121](#)
- main
 - startup.c, [2833](#)
- MAINSORT
 - ftypes.h, [1446](#)
- MAJORVERSION
 - form3.h, [1343](#)
- MAKEARGS
 - ftypes.h, [1461](#)
- MakeDate
 - declare.h, [904](#)
 - tools.c, [3119](#)
- MakeDirty
 - declare.h, [858](#)
 - function.c, [1488](#)
- MakeDollarInteger
 - declare.h, [972](#)
 - dollar.c, [1108](#)
- MakeDollarMod
 - declare.h, [972](#)
 - dollar.c, [1109](#)
- MakeDubious
 - declare.h, [895](#)
 - names.c, [1865](#)
- MakeGlobal
 - declare.h, [924](#)
 - execute.c, [1170](#)
- MakeInteger
 - argument.c, [499](#)
 - declare.h, [935](#)
- MakeInverses
 - declare.h, [872](#)
 - reken.c, [2590](#)
- MakeLongRational
 - declare.h, [976](#)
 - reken.c, [2593](#)
- MakeMod
 - argument.c, [499](#)
 - declare.h, [935](#)
- MakeModTable
 - declare.h, [859](#)
 - reken.c, [2594](#)
- MakeNameTree
 - declare.h, [897](#)
 - names.c, [1859](#)
- MAKERATIONAL
 - ftypes.h, [1416](#)
- MakeRational
 - declare.h, [976](#)
 - reken.c, [2593](#)
- MakeSetupAllocs
 - declare.h, [981](#)
 - setfile.c, [2726](#)

- Malloc1
 - declare.h, [891](#)
 - tools.c, [3120](#)
- mallocprotect.h, [1737](#)
- MAPLEMODE
 - ftypes.h, [1400](#)
- MarkDirty
 - declare.h, [858](#)
 - function.c, [1488](#)
- MarkPolyRatFunDirty
 - declare.h, [823](#)
- MaskPointer
 - N_const, [251](#)
- mass
 - PaRtlcLe, [331](#)
- MASTER
 - parallel.h, [2169](#)
- MATCH
 - ftypes.h, [1451](#)
- match
 - SProcess, [410](#)
- MatchArgument
 - declare.h, [859](#)
 - symmetr.c, [2964](#)
- MatchCy
 - declare.h, [859](#)
 - symmetr.c, [2964](#)
- MatchE
 - declare.h, [859](#)
 - symmetr.c, [2963](#)
- MATCHFUNCTION
 - ftypes.h, [1411](#)
- MatchFunction
 - declare.h, [860](#)
 - function.c, [1490](#)
- matchfunnum
 - M_const, [188](#)
- MatchIsPossible
 - declare.h, [970](#)
 - smart.c, [2742](#)
- MATHEMATICAMODE
 - ftypes.h, [1400](#)
- MaX
 - declare.h, [806](#)
- MAX_OPEN_FILES
 - form3.h, [1349](#)
- MaxBracket
 - R_const, [379](#)
- MAXBRACKETBUFFERSIZE
 - fsizes.h, [1362](#)
- MaxBracketBufferSize
 - M_const, [174](#)
- MAXBUILTINFUNCTION
 - ftypes.h, [1420](#)
- maxcase
 - SWITCH, [427](#)
- MAXCOUPLINGS
 - fsizes.h, [1365](#)
- maxcpl
 - Model, [233](#)
- maxdeg
 - EGraph, [112](#)
 - ENode, [117](#)
 - MGraph, [213](#)
 - MNodeClass, [226](#)
 - T_EGraph, [449](#)
 - T_MGraph, [453](#)
 - T_MNodeClass, [461](#)
- MaxDoLoops
 - variable.h, [3232](#)
- MaxDum
 - R_const, [381](#)
- MAXENAME
 - fsizes.h, [1357](#)
- MaxExprSize
 - S_const, [386](#)
- MAXFLAGS
 - fsizes.h, [1359](#)
- MAXFLEVELS
 - fsizes.h, [1362](#)
- maxFlevels
 - M_const, [181](#)
- MAXFPATCHES
 - fsizes.h, [1361](#)
- MaxFpatches
 - sOrT, [404](#)
- MAXFUNCTION
 - ftypes.h, [1410](#)
- MaxFunSorts
 - N_const, [257](#)
- maxi
 - MiNmAx, [218](#)
- MAXIF
 - fsizes.h, [1359](#)
- MaxIf
 - C_const, [56](#)
- MAXLABELS
 - fsizes.h, [1359](#)
- MaxLabels
 - C_const, [55](#)
- MAXLEGS
 - fsizes.h, [1365](#)
- MAXLEVELS
 - fsizes.h, [1360](#)
- MAXLHS
 - fsizes.h, [1360](#)
- maxlhs
 - CbUf, [73](#)
- MAXLINELENGTH
 - fsizes.h, [1365](#)
- MAXLONG
 - form3.h, [1346](#)
- maxloop
 - Model, [233](#)
- MAXLOOPS
 - fsizes.h, [1359](#)

- MAXMATCH
 - fsizes.h, [1359](#)
- MAXMULTIBRACKETLEVELS
 - fsizes.h, [1364](#)
- MAXNEST
 - fsizes.h, [1358](#)
- maxnlegs
 - Model, [233](#)
 - Process, [371](#)
- maxnum
 - LIST, [164](#)
- maxnumargs
 - FuNcTiOn, [146](#)
- MAXNUMBEROFNONCOMTERMS
 - normal.c, [1905](#)
- MAXNUMBERSIZE
 - fsizes.h, [1358](#)
- MaxNumPre
 - variable.h, [3233](#)
- MAXNUMSIZE
 - fsizes.h, [1362](#)
- MaxNumStreams
 - C_const, [56](#)
- MAXPARLEVEL
 - fsizes.h, [1358](#)
- MaxParLevel
 - M_const, [176](#)
- MAXPARTICLES
 - fsizes.h, [1365](#)
- MAXPATCHES
 - fsizes.h, [1360](#)
- MaxPatches
 - sOrT, [403](#)
- MAXPOINTS
 - diawrap.cc, [1068](#)
 - topowrap.cc, [3173](#)
- MAXPOSITIVE
 - form3.h, [1346](#)
- MAXPOSITIVE2
 - form3.h, [1346](#)
- MAXPOSITIVE4
 - form3.h, [1346](#)
- maxpower
 - STOREHEADER, [419](#)
 - SyMbOl, [429](#)
- MAXPOWEROF
 - ftypes.h, [1412](#)
- MaxPreAssignLevel
 - P_const, [321](#)
- MaxPreIfLevel
 - P_const, [320](#)
- MAXPRENAMESIZE
 - fsizes.h, [1357](#)
- MaxPreTypes
 - P_const, [320](#)
- MaxProcedures
 - variable.h, [3232](#)
- MAXRANGEINDICATOR
 - ftypes.h, [1461](#)
- MaxRenumScratch
 - N_const, [258](#)
- MAXREPEAT
 - fsizes.h, [1358](#)
- maxrhs
 - CbUf, [74](#)
- MAXSAVEFUNCTION
 - fsizes.h, [1357](#)
- MaxStreamSize
 - M_const, [174](#)
- MaxSwitch
 - C_const, [68](#)
- MaxTal
 - M_const, [184](#)
- MaxTer
 - M_const, [173](#)
- maxtermlevel
 - C_const, [59](#)
- maxtermsize
 - sOrT, [404](#)
- MaxTreeSize
 - CbUf, [74](#)
 - TaBlEs, [469](#)
- maxvar
 - OPTIMIZERESULT, [299](#)
- MAXWILDC
 - fsizes.h, [1360](#)
- MaxWildcards
 - M_const, [185](#)
- mBer
 - T_const, [443](#)
- MCBlock, [192](#)
 - ~MCBlock, [192](#)
 - DUMMYPADDING, [193](#)
 - edges, [193](#)
 - init, [193](#)
 - loop, [193](#)
 - MCBlock, [192](#)
 - nartps, [193](#)
 - nmedges, [193](#)
- MCBridge, [194](#)
 - ~MCBridge, [194](#)
 - MCBridge, [194](#)
 - next, [194](#)
 - nodes, [194](#)
- MCEdge, [195](#)
 - ~MCEdge, [195](#)
 - DUMMYPADDING, [196](#)
 - MCEdge, [195](#)
 - momdir, [195](#)
 - momset, [195](#)
 - nodes, [195](#)
- MCLEANFLAG
 - minos.h, [1782](#)
- MConn, [196](#)
 - ~MConn, [197](#)
 - addArtic, [199](#)

- addBlock, [199](#)
- addBlockSelf, [199](#)
- addBridge, [198](#)
- addCEdge, [198](#)
- addOPlc, [198](#)
- articuls, [200](#)
- blksp, [200](#)
- blkstk, [201](#)
- blkstkptr, [203](#)
- blocks, [200](#)
- bridges, [200](#)
- cedges, [200](#)
- DUMMYPADDING, [203](#)
- init, [198](#)
- initCEdges, [198](#)
- MConn, [197](#)
- na1blocks, [202](#)
- narticuls, [202](#)
- nbacked, [201](#)
- nblksp, [203](#)
- nblocks, [202](#)
- nbridges, [201](#)
- nctopic, [201](#)
- ne0bridges, [202](#)
- ne1bridges, [202](#)
- neblocks, [202](#)
- nlpopic, [201](#)
- nmultiedges, [202](#)
- nopic, [201](#)
- nopisp, [203](#)
- nselfloops, [202](#)
- opics, [200](#)
- opisp, [200](#)
- opistk, [200](#)
- opistkptr, [203](#)
- prEdges, [199](#)
- print, [199](#)
- pushEdge, [198](#)
- pushNode, [198](#)
- sedges, [201](#)
- snodes, [201](#)
- mconn
 - MGraph, [217](#)
- MCOp, [203](#)
 - ~MCOp, [204](#)
 - ctloop, [205](#)
 - DUMMYPADDING, [205](#)
 - init, [204](#)
 - loop, [205](#)
 - MCOp, [204](#)
 - momOlg, [205](#)
 - nedges, [205](#)
 - next, [205](#)
 - nlegs, [205](#)
 - nnodes, [204](#)
 - nodes, [204](#)
- mcts_best_schemes
 - optimize.cc, [2041](#)
- mcts_expr_score
 - optimize.cc, [2040](#)
- mcts_factorized
 - optimize.cc, [2040](#)
- mcts_root
 - optimize.cc, [2040](#)
- mcts_separated
 - optimize.cc, [2040](#)
- mcts_vars
 - optimize.cc, [2040](#)
- mctsdecaymode
 - OPTIMIZE, [297](#)
- mctsnumexpand
 - OPTIMIZE, [296](#)
- mctsnumkeep
 - OPTIMIZE, [296](#)
- mctsnumrepeat
 - OPTIMIZE, [296](#)
- mctstimelimit
 - OPTIMIZE, [296](#)
- mdefined
 - TaBIEs, [468](#)
- mdel
 - TrAcEs, [480](#)
- MDIRTYFLAG
 - minos.h, [1782](#)
- mdl
 - Interaction, [160](#)
 - Particle, [329](#)
- mdum
 - TrAcEs, [481](#)
- me
 - ParallelVars, [324](#)
- mean
 - OptDef, [291](#)
 - OptQGDef, [308](#)
- MemDebugFlag
 - C_const, [61](#)
- MEMORYMACROS
 - declare.h, [822](#)
- mepf
 - TrAcEs, [480](#)
- merge_operators
 - optimize.cc, [2030](#)
- MergeDotproductLists
 - declare.h, [1016](#)
 - ratio.c, [2538](#)
- MergePatches
 - declare.h, [860](#)
 - sort.c, [2760](#)
- MergeSymbolLists
 - declare.h, [1016](#)
 - ratio.c, [2538](#)
- MergeWithFloat
 - float.c, [1309](#)
- MesCall
 - declare.h, [926](#)
 - message.c, [1743](#)

- MesCerr
 - declare.h, [861](#)
 - message.c, [1743](#)
- MesComp
 - declare.h, [861](#)
 - message.c, [1743](#)
- MesNesting
 - declare.h, [823](#)
- MesPrint
 - message.c, [1743](#)
- message
 - LIST, [164](#)
- message.c, [1741](#), [1745](#)
 - Error0, [1742](#)
 - Error1, [1742](#)
 - Error2, [1742](#)
 - HighWarning, [1743](#)
 - MesCall, [1743](#)
 - MesCerr, [1743](#)
 - MesComp, [1743](#)
 - MesPrint, [1743](#)
 - MesWork, [1742](#)
 - PrintSeq, [1744](#)
 - PrintSubTerm, [1744](#)
 - PrintTerm, [1743](#)
 - PrintTermC, [1744](#)
 - PrintWords, [1744](#)
 - Warning, [1743](#)
- MessPreNesting
 - declare.h, [929](#)
 - pre.c, [2362](#)
- MesWork
 - declare.h, [926](#)
 - message.c, [1742](#)
- method
 - OPTIMIZE, [296](#)
- mfac
 - T_const, [438](#)
- MGraph, [206](#)
 - ~MGraph, [208](#)
 - adjMat, [213](#)
 - bicol, [217](#)
 - biconnME, [210](#)
 - bicount, [217](#)
 - bidef, [217](#)
 - bilow, [217](#)
 - bipart, [216](#)
 - bisearchME, [210](#)
 - block, [216](#)
 - c1PI, [214](#)
 - c1PINoTadBlock, [214](#)
 - cDiag, [214](#)
 - clist, [212](#)
 - cNoTadBlock, [214](#)
 - cNoTadpole, [214](#)
 - compMat, [210](#)
 - connectClass, [211](#)
 - connectLeg, [211](#)
 - connectNode, [211](#)
 - curl, [213](#)
 - discardDisc, [215](#)
 - discardIso, [215](#)
 - discardRefine, [215](#)
 - DUMMYPADDING1, [216](#)
 - DUMMYPADDING2, [217](#)
 - egraph, [213](#)
 - esym, [214](#)
 - extself, [216](#)
 - generate, [208](#)
 - group, [211](#)
 - init, [208](#)
 - isConnected, [209](#)
 - isExternal, [208](#)
 - isIsomorphic, [209](#)
 - isOptM, [210](#)
 - maxdeg, [213](#)
 - mconn, [217](#)
 - MGraph, [208](#)
 - mId, [212](#)
 - mindeg, [213](#)
 - modmat, [217](#)
 - multiedge, [216](#)
 - nCallRefine, [215](#)
 - nClasses, [213](#)
 - nEdges, [212](#)
 - newGraph, [211](#)
 - nExtern, [213](#)
 - ngconn, [215](#)
 - ngen, [215](#)
 - nLoops, [212](#)
 - nNodes, [212](#)
 - nodes, [212](#)
 - nsym, [213](#)
 - opi, [215](#)
 - opiloop, [215](#)
 - opt, [211](#)
 - orbits, [212](#)
 - permMat, [209](#)
 - pId, [212](#)
 - print, [209](#)
 - printAdjMat, [209](#)
 - printPy, [209](#)
 - refineClass, [210](#)
 - selfloop, [216](#)
 - tadblock, [216](#)
 - tadpole, [216](#)
 - visit, [209](#)
 - wscon, [214](#)
 - wsopi, [214](#)
- mgraph
 - Assign, [23](#)
 - EGraph, [109](#)
 - SProcess, [412](#)
- mgrcount
 - Process, [370](#)
 - SProcess, [414](#)

- mId
 - EGraph, [110](#)
 - MGraph, [212](#)
- MiN
 - declare.h, [806](#)
- MINALLOC
 - fsizes.h, [1365](#)
- mincase
 - SWITCH, [427](#)
- mindeg
 - MGraph, [213](#)
 - T_MGraph, [453](#)
- MINFUNCTION
 - ftypes.h, [1409](#)
- mini
 - MiNmAx, [218](#)
- MiNmAx, [218](#)
 - maxi, [218](#)
 - mini, [218](#)
 - size, [218](#)
- minnumargs
 - FuNcTiOn, [146](#)
- MINORVERSION
 - form3.h, [1343](#)
- minos.c, [1756](#), [1763](#)
 - AddObject, [1761](#)
 - AddTableName, [1760](#)
 - AddToIndex, [1761](#)
 - CFD, [1757](#)
 - ComposeTableNames, [1760](#)
 - convertblock, [1758](#)
 - convertiniinfo, [1758](#)
 - convertnamesblock, [1758](#)
 - CTD, [1757](#)
 - DeleteObject, [1762](#)
 - ExistsObject, [1762](#)
 - FindTableNumber, [1761](#)
 - FreeTableBase, [1760](#)
 - GetDbase, [1760](#)
 - GetTableName, [1761](#)
 - LocateBase, [1759](#)
 - minosread, [1758](#)
 - minoswrite, [1758](#)
 - NewDbase, [1760](#)
 - OpenDbase, [1760](#)
 - PutTableNames, [1761](#)
 - ReadijObject, [1762](#)
 - ReadIndex, [1759](#)
 - ReadIniInfo, [1760](#)
 - ReadObject, [1762](#)
 - str_dup, [1758](#)
 - withoutflush, [1763](#)
 - WriteIndex, [1759](#)
 - WriteIndexBlock, [1759](#)
 - WriteIniInfo, [1759](#)
 - WriteNamesBlock, [1759](#)
 - WriteObject, [1761](#)
- minos.h, [1780](#), [1783](#)
 - FROMDISK, [1781](#)
 - INANDOUT, [1782](#)
 - INPUTONLY, [1782](#)
 - MCLEANFLAG, [1782](#)
 - MDIRTYFLAG, [1782](#)
 - minosread, [1783](#)
 - minoswrite, [1783](#)
 - NOCOMPRESS, [1782](#)
 - OUTPUTONLY, [1782](#)
 - TODISK, [1781](#)
 - withoutflush, [1783](#)
- minosread
 - minos.c, [1758](#)
 - minos.h, [1783](#)
- minoswrite
 - minos.c, [1758](#)
 - minos.h, [1783](#)
- minpower
 - SyMbOl, [429](#)
- MINPOWEROF
 - ftypes.h, [1412](#)
- MInput, [219](#)
 - cnamlist, [219](#)
 - defpart, [219](#)
 - name, [219](#)
 - ncouple, [219](#)
- minsidefirst
 - C_const, [55](#)
- MINSPEC
 - ftypes.h, [1445](#)
- minvar
 - OPTIMIZERESULT, [299](#)
- MinVecArg
 - T_const, [442](#)
- MINVECTOR
 - ftypes.h, [1405](#)
- MIXED
 - ftypes.h, [1390](#)
- MIXED2
 - ftypes.h, [1390](#)
- mkCIMat
 - MNodeClass, [224](#)
 - T_MNodeClass, [459](#)
- mkFlist
 - MNodeClass, [224](#)
 - T_MNodeClass, [459](#)
- mkNdCI
 - MNodeClass, [224](#)
 - T_MNodeClass, [459](#)
- mkSlaveInfile
 - ParallelVars, [324](#)
- mkSPProcess
 - Process, [369](#)
- MLOCK
 - declare.h, [825](#)
- MLONG
 - form3.h, [1351](#)
- mm

- TaBIEs, [466](#)
- MNode, [220](#)
 - class, [221](#)
 - cmaxdeg, [221](#)
 - cmindeg, [221](#)
 - deg, [221](#)
 - extloop, [221](#)
 - freelg, [222](#)
 - id, [221](#)
 - MNode, [220](#)
 - visited, [222](#)
- MNodeClass, [222](#)
 - ~MNodeClass, [223](#)
 - clCmp, [223](#)
 - clist, [225](#)
 - clmat, [225](#)
 - clord, [225](#)
 - cmaxdeg, [225](#)
 - cmindeg, [225](#)
 - cmpMNCArray, [224](#)
 - copy, [223](#)
 - flg0, [226](#)
 - flg1, [226](#)
 - flg2, [226](#)
 - flist, [225](#)
 - incMat, [224](#)
 - init, [223](#)
 - maxdeg, [226](#)
 - mkCIMat, [224](#)
 - mkFlist, [224](#)
 - mkNdCI, [224](#)
 - MNodeClass, [223](#)
 - nClasses, [226](#)
 - ndcl, [225](#)
 - nNodes, [226](#)
 - printMat, [223](#)
 - reorder, [224](#)
- mnumlhs
 - CbUf, [74](#)
- mnumrhs
 - CbUf, [74](#)
- mod
 - poly, [356](#)
- MOD2FUNCTION
 - ftypes.h, [1409](#)
- mode
 - dbase, [78](#)
 - TaBIEs, [470](#)
- MoDeL, [235](#)
 - couplings, [235](#)
 - dummy, [237](#)
 - error, [237](#)
 - gccmodel, [236](#)
 - invertices, [236](#)
 - legcouple, [236](#)
 - name, [236](#)
 - ncouplings, [237](#)
 - nparticles, [236](#)
 - nvertices, [236](#)
 - sizcouplings, [236](#)
 - sizevertices, [236](#)
 - vertices, [235](#)
- Model, [227](#)
 - ~Model, [228](#)
 - addInteraction, [229](#)
 - addInteractionEnd, [229](#)
 - addParticle, [229](#)
 - addParticleEnd, [229](#)
 - allPart, [232](#)
 - allParticles, [230](#)
 - antiParticle, [230](#)
 - cnlist, [232](#)
 - cpIgcP, [234](#)
 - cpIglg, [234](#)
 - cpIgvI, [234](#)
 - cpIgvI, [234](#)
 - defpart, [234](#)
 - findInteractionCode, [230](#)
 - findInteractionName, [230](#)
 - findMClass, [231](#)
 - findParticleCode, [229](#)
 - findParticleName, [229](#)
 - interacts, [233](#)
 - intPart, [233](#)
 - maxcpl, [233](#)
 - maxloop, [233](#)
 - maxnlegs, [233](#)
 - Model, [228](#)
 - nallPart, [232](#)
 - name, [232](#)
 - ncouple, [232](#)
 - ncplgcP, [234](#)
 - nInteracts, [233](#)
 - nintPart, [233](#)
 - normalParticle, [230](#)
 - nParticles, [232](#)
 - particleCode, [230](#)
 - particleName, [230](#)
 - particles, [232](#)
 - pdef, [232](#)
 - printIInput, [231](#)
 - printMInput, [231](#)
 - printPInput, [231](#)
 - prModel, [229](#)
 - prParticleArray, [231](#)
 - vdef, [233](#)
- model
 - Assign, [24](#)
 - EGraph, [109](#)
 - Options, [305](#)
 - Output, [313](#)
 - Process, [370](#)
 - SProcess, [411](#)
- model.c, [1785](#), [1787](#)
 - CoEndModel, [1786](#)
 - CoModel, [1786](#)

- CoParticle, [1786](#)
- CoVertex, [1786](#)
- CreateVertex, [1786](#)
- ReadParticle, [1786](#)
- ModelLevel
 - C_const, [63](#)
- modeloptions
 - R_const, [382](#)
- models
 - C_const, [47](#)
- modelspace
 - C_const, [63](#)
- MODFUNCTION
 - ftypes.h, [1409](#)
- modinverses
 - C_const, [51](#)
- MODLOCAL
 - ftypes.h, [1459](#)
- modmat
 - MGraph, [217](#)
- MODMAX
 - ftypes.h, [1458](#)
- MODMIN
 - ftypes.h, [1458](#)
- modmode
 - C_const, [66](#)
- modn
 - poly, [361](#)
- MODNONE
 - ftypes.h, [1458](#)
- MODNUM, [237](#)
 - a, [237](#)
 - m, [237](#)
 - na, [238](#)
 - nm, [238](#)
- modnum
 - POLYMOD, [363](#)
- MoDoPtDoLIaRS, [238](#)
 - number, [238](#)
 - type, [238](#)
- ModOptdollars
 - variable.h, [3237](#)
- ModOptDolList
 - C_const, [45](#)
- modp
 - poly, [361](#)
- modpowers
 - C_const, [48](#)
- MODSUM
 - ftypes.h, [1458](#)
- module.c, [1792](#), [1796](#)
 - CoModOption, [1793](#)
 - CoModuleOption, [1793](#)
 - DoExecStatement, [1796](#)
 - DoinParallel, [1795](#)
 - DoModDollar, [1795](#)
 - DoModLocal, [1795](#)
 - DoModMax, [1795](#)
 - DoModMin, [1795](#)
 - DoModSum, [1794](#)
 - DoNoParallel, [1794](#)
 - DonotinParallel, [1795](#)
 - DoParallel, [1794](#)
 - DoPipeStatement, [1796](#)
 - DoPolyfun, [1794](#)
 - DoPolyratfun, [1794](#)
 - DoProcessBucket, [1795](#)
 - ExecModule, [1793](#)
 - ExecStore, [1794](#)
 - FullCleanUp, [1794](#)
 - ModuleInstruction, [1793](#)
 - SetSpecialMode, [1793](#)
- MODULEINSTACK
 - ftypes.h, [1386](#)
- ModuleInstruction
 - declare.h, [910](#)
 - module.c, [1793](#)
- Modulus
 - declare.h, [861](#)
 - reken.c, [2594](#)
- MOEBIUS
 - ftypes.h, [1417](#)
- Moebius
 - declare.h, [997](#)
 - reken.c, [2595](#)
- moebiustable
 - R_const, [377](#)
- moebiustablesizes
 - R_const, [382](#)
- mom0lg
 - MCOpI, [205](#)
- momc
 - T_EEdge, [445](#)
- momdir
 - EEdge, [99](#)
 - MCEdge, [195](#)
- momn
 - T_EEdge, [445](#)
- momset
 - EEdge, [99](#)
 - MCEdge, [195](#)
- monomial_compare
 - poly, [354](#)
- monomial_larger, [239](#)
 - monomial_larger, [239](#)
 - operator(), [239](#)
- MOrbits, [240](#)
 - ~MOrbits, [240](#)
 - flist, [241](#)
 - fromPerm, [241](#)
 - initPerm, [240](#)
 - MOrbits, [240](#)
 - nd2or, [241](#)
 - nNodes, [241](#)
 - nOrbits, [241](#)
 - or2nd, [241](#)

- print, [240](#)
- toOrbits, [241](#)
- MoveDummies
 - declare.h, [861](#)
 - reshuf.c, [2643](#)
- mparallelflag
 - C_const, [60](#)
- mpi.c, [1805](#), [1823](#)
 - MPI_ERRCODE_CHECK, [1807](#)
 - PF_Bcast, [1812](#)
 - PF_Broadcast, [1817](#)
 - PF_IRecvRbuf, [1811](#)
 - PF_ISendSbuf, [1810](#)
 - PF_LibInit, [1809](#)
 - PF_LibTerminate, [1809](#)
 - PF_LongMultiBroadcast, [1822](#)
 - PF_LongMultiPackImpl, [1820](#)
 - PF_LongMultiUnpackImpl, [1821](#)
 - PF_LongSinglePack, [1818](#)
 - PF_LongSingleReceive, [1819](#)
 - PF_LongSingleSend, [1819](#)
 - PF_LongSingleUnpack, [1818](#)
 - PF_maxDollarChunkSize, [1822](#)
 - PF_Pack, [1814](#)
 - PF_PACKSIZE, [1807](#)
 - PF_PackString, [1815](#)
 - PF_PrepereLongMultiPack, [1820](#)
 - PF_PrepereLongSinglePack, [1817](#)
 - PF_PreperePack, [1814](#)
 - PF_PrintPackBuf, [1813](#)
 - PF_Probe, [1810](#)
 - PF_RawProbe, [1813](#)
 - PF_RawRecv, [1812](#)
 - PF_RawSend, [1812](#)
 - PF_RealTime, [1807](#)
 - PF_Receive, [1816](#)
 - PF_RecvWbuf, [1810](#)
 - PF_Send, [1816](#)
 - PF_Unpack, [1814](#)
 - PF_UnpackString, [1815](#)
 - PF_WaitRbuf, [1811](#)
- MPI_Barrier
 - mpidbg.h, [1845](#)
- MPI_Bcast
 - mpidbg.h, [1845](#)
- MPI_Bsend
 - mpidbg.h, [1842](#)
- MPI_Cancel
 - mpidbg.h, [1845](#)
- MPI_ERRCODE_CHECK
 - mpi.c, [1807](#)
- MPI_Ibsend
 - mpidbg.h, [1843](#)
- MPI_lprobe
 - mpidbg.h, [1844](#)
- MPI_irecv
 - mpidbg.h, [1843](#)
- MPI_Irsend
 - mpidbg.h, [1843](#)
- mpidbg.h, [1840](#), [1846](#)
 - MPI_Barrier, [1845](#)
 - MPI_Bcast, [1845](#)
 - MPI_Bsend, [1842](#)
 - MPI_Cancel, [1845](#)
 - MPI_Ibsend, [1843](#)
 - MPI_lprobe, [1844](#)
 - MPI_irecv, [1843](#)
 - MPI_Irsend, [1843](#)
 - MPI_Isend, [1843](#)
 - MPI_Issend, [1843](#)
 - MPI_Probe, [1845](#)
 - MPI_Recv, [1842](#)
 - MPI_Rsend, [1842](#)
 - MPI_Send, [1842](#)
 - MPI_Ssend, [1842](#)
 - MPI_Test, [1843](#)
 - MPI_Test_cancelled, [1845](#)
 - MPI_Testall, [1844](#)
 - MPI_Testany, [1844](#)
 - MPI_Testsome, [1844](#)
 - MPI_Wait, [1843](#)
 - MPI_Waitall, [1844](#)
 - MPI_Waitany, [1844](#)
 - MPI_Waitsome, [1844](#)
- MPI_Isend
 - mpidbg.h, [1843](#)
- MPI_Issend
 - mpidbg.h, [1843](#)
- MPI_Probe
 - mpidbg.h, [1845](#)
- MPI_Recv
 - mpidbg.h, [1842](#)
- MPI_Rsend
 - mpidbg.h, [1842](#)
- MPI_Send
 - mpidbg.h, [1842](#)
- MPI_Ssend
 - mpidbg.h, [1842](#)
- MPI_Test
 - mpidbg.h, [1843](#)
- MPI_Test_cancelled
 - mpidbg.h, [1845](#)
- MPI_Testall
 - mpidbg.h, [1844](#)
- MPI_Testany
 - mpidbg.h, [1844](#)
- MPI_Testsome
 - mpidbg.h, [1844](#)
- MPI_Wait
 - mpidbg.h, [1843](#)
- MPI_Waitall
 - mpidbg.h, [1844](#)
- MPI_Waitany
 - mpidbg.h, [1844](#)
- MPI_Waitsome
 - mpidbg.h, [1844](#)

- MPIDBG_EXTARG, [1842](#)
- MPIDBG_Out, [1842](#)
- MPIDBG_RANK, [1842](#)
- MPIDBG_EXTARG
 - mpidbg.h, [1842](#)
- MPIDBG_Out
 - mpidbg.h, [1842](#)
- MPIDBG_RANK
 - mpidbg.h, [1842](#)
- MPLFUNCTION
 - ftypes.h, [1420](#)
- mpoly
 - flint::mpoly, [242](#)
- mpoly_ctx
 - flint::mpoly_ctx, [243](#)
- mpoly_factor
 - flint::mpoly_factor, [244](#)
- mpower
 - O_const, [287](#)
- mProcessBucketSize
 - C_const, [53](#)
- mTraceDum
 - M_const, [186](#)
- mul
 - COST, [76](#)
 - poly, [355](#)
- mul_heap
 - poly, [357](#)
- mul_mpoly
 - flintinterface.h, [1286](#)
- mul_one_term
 - poly, [357](#)
- mul_poly
 - flintinterface.h, [1287](#)
- mul_univar
 - poly, [357](#)
- MulFloats
 - float.c, [1302](#)
- MULfunc
 - declare.h, [1016](#)
 - ratio.c, [2540](#)
- MULFUNCTION
 - ftypes.h, [1417](#)
- MulLong
 - declare.h, [861](#)
 - reken.c, [2588](#)
- Mully
 - declare.h, [862](#)
 - reken.c, [2586](#)
- mulpat
 - T_const, [442](#)
- MULPOS
 - declare.h, [818](#)
- MulRat
 - declare.h, [862](#)
 - reken.c, [2587](#)
- MulRatToFloat
 - float.c, [1303](#)
- MultDo
 - declare.h, [862](#)
 - reshuf.c, [2644](#)
- MultiBracketBuf
 - C_const, [51](#)
- MultiBracketLevels
 - C_const, [61](#)
- multiedge
 - MGraph, [216](#)
- MULTIINDENTSPACE
 - fsizes.h, [1364](#)
- MULTIPLEOF
 - ftypes.h, [1451](#)
- MULTIPLYARG
 - ftypes.h, [1463](#)
- MultiplyToLine
 - declare.h, [1027](#)
 - sch.c, [2686](#)
- MultiplyWithTerm
 - declare.h, [1015](#)
 - ratio.c, [2537](#)
- MultiRun
 - M_const, [182](#)
- MultiThreaded
 - S_const, [387](#)
- multp
 - EGraph, [111](#)
- MUNLOCK
 - declare.h, [826](#)
- MUSTCLEANPRF
 - ftypes.h, [1436](#)
- mustfree
 - PROCEDURE, [367](#)
- MustTestTable
 - C_const, [65](#)
- my_random_shuffle
 - optimize.cc, [2021](#)
- mytime.cc, [1854](#)
- mytime.h, [1854](#)
- MZV
 - ftypes.h, [1419](#)
- MZVHALF
 - ftypes.h, [1419](#)
- N
 - AllGlobals, [10](#)
- n
 - DiStRiBuTe, [85](#)
 - PeRmUtE, [332](#)
 - PeRmUtEp, [333](#)
- n1
 - DiStRiBuTe, [85](#)
- n1PI
 - T_MGraph, [454](#)
- n2
 - DiStRiBuTe, [85](#)
- N_const, [245](#)
 - argaddress, [249](#)
 - arglist, [254](#)

arglistsize, [257](#)
cmod, [254](#)
compressSize, [258](#)
compressSpace, [254](#)
cTerm, [248](#)
currentTerm, [253](#)
deferskipped, [254](#)
DisOrderFlag, [259](#)
DumFound, [250](#)
DumFunPlace, [250](#)
dummyrenumlist, [251](#)
DumPlace, [250](#)
EndNest, [248](#)
ErrorInDollar, [256](#)
ExpectedSign, [261](#)
filenum, [258](#)
findPattern, [251](#)
findTerm, [251](#)
ForFindOnly, [251](#)
Frozen, [248](#)
FullProto, [248](#)
funargs, [251](#)
funinds, [251](#)
FunInfo, [253](#)
funisize, [256](#)
funlocs, [251](#)
FunScratch, [252](#)
FunSorts, [253](#)
idfunctionflag, [261](#)
IndDum, [261](#)
InScratch, [255](#)
InScratch1, [255](#)
intracestack, [257](#)
listinprint, [253](#)
MaskPointer, [251](#)
MaxFunSorts, [257](#)
MaxRenumScratch, [258](#)
nargs, [256](#)
ncmod, [260](#)
ninterms, [255](#)
nogroundlevel, [258](#)
NoScrat2, [252](#)
numfargs, [256](#)
numflocs, [256](#)
NumFound, [259](#)
numfuninfo, [257](#)
NumFunSorts, [257](#)
numlistinprint, [260](#)
numoffuns, [256](#)
NumTotWildArgs, [255](#)
numtracesctack, [257](#)
NumWild, [259](#)
OldPosIn, [248](#)
OldPosOut, [248](#)
oldtype, [258](#)
oldvalue, [258](#)
patstop, [249](#)
patternbuffer, [252](#)
patternbuffersize, [260](#)
PoinScratch, [252](#)
poly_num_vars, [261](#)
poly_vars, [254](#)
poly_vars_type, [261](#)
PolyFunTodo, [260](#)
PolyNormFlag, [260](#)
polysortflag, [258](#)
RenumScratch, [253](#)
RepFunList, [249](#)
RepFunNum, [259](#)
ReplaceScrat, [252](#)
RepPoint, [249](#)
Rssize, [257](#)
selecttermundo, [252](#)
SHcombi, [254](#)
SHcombisize, [255](#)
SHvar, [254](#)
SignCheck, [261](#)
sizeselecttermundo, [260](#)
SoScratC, [253](#)
SplitScratch, [253](#)
SplitScratch1, [253](#)
SplitScratchSize, [255](#)
SplitScratchSize1, [255](#)
subsubveto, [258](#)
TelnFun, [259](#)
terfirstcomm, [250](#)
termbuffer, [252](#)
terstart, [249](#)
terstop, [249](#)
TeSuOut, [259](#)
theposition, [248](#)
tlistbuf, [254](#)
tlistsize, [257](#)
tohunt, [256](#)
tracestack, [252](#)
tryterm, [261](#)
UsedFunction, [250](#)
UsedIndex, [250](#)
UsedOtherFind, [256](#)
UsedSymbol, [250](#)
UsedVector, [250](#)
UseFindOnly, [255](#)
WildArgs, [260](#)
WildDirt, [259](#)
WildEat, [260](#)
WildReserve, [259](#)
WildStop, [249](#)
WildValue, [249](#)
na
 MODNUM, [238](#)
na1blocks
 MConn, [202](#)
nadj2ptv
 EGraph, [113](#)
nAGraphs
 Assign, [25](#)

- Process, 373
- SProcess, 415
- nallPart
 - Model, 232
- name
 - ChAnNeL, 75
 - dbase, 79
 - DICTIONARY, 82
 - DoLIArS, 88
 - DoLoOp, 90
 - DuBiOuS, 93
 - ExPrEsSiOn, 122
 - FiLe, 129
 - fixedset, 137
 - FuNcTiOn, 144
 - IInput, 148
 - InDeX, 149
 - InDeXeNtRy, 154
 - Interaction, 160
 - KEYWORD, 162
 - KEYWORDV, 163
 - MInput, 219
 - MoDeL, 236
 - Model, 232
 - NaMeNode, 263
 - NaMeSpAcE, 265
 - OptDef, 291
 - OptQGDef, 308
 - OptQGRef, 308
 - Particle, 329
 - PInput, 338
 - pReVaR, 365
 - PROCEDURE, 367
 - SeTs, 388
 - SpecTatoR, 407
 - StreaM, 422
 - SyMbOl, 429
 - TaBIEbAsE, 462
 - VeCtOr, 489
- nameblock, 262
 - names, 262
 - position, 262
 - previousblock, 262
- namebuffer
 - NaMeTree, 266
- NameConflict
 - declare.h, 900
 - names.c, 1865
- namefill
 - NaMeTree, 267
- NAMENODE
 - structs.h, 2933
- NaMeNode, 263
 - balance, 264
 - left, 263
 - name, 263
 - number, 264
 - parent, 263
 - right, 263
 - type, 264
- namenode
 - NaMeTree, 266
- NAMENOTFOUND
 - ftypes.h, 1455
- nameofexpr
 - OPTIMIZERESULT, 298
- names
 - nameblock, 262
- names.c, 1855, 1866
 - AddDollar, 1864
 - AddDubious, 1865
 - AddExpression, 1865
 - AddFunction, 1862
 - AddIndex, 1861
 - AddName, 1857
 - AddSet, 1863
 - AddSymbol, 1860
 - AddVector, 1861
 - AddWildcardName, 1860
 - ClearWildcardNames, 1860
 - CoAuto, 1864
 - CoCFunction, 1862
 - CoCommutelnSet, 1862
 - CoCTable, 1863
 - CoCTensor, 1863
 - CoDimension, 1861
 - CoFunction, 1862
 - CoIndex, 1861
 - CompactifyTree, 1859
 - CoNFunction, 1862
 - CoNTable, 1863
 - CoNTensor, 1862
 - CopyTree, 1859
 - CoSet, 1864
 - CoSymbol, 1860
 - CoTable, 1863
 - CoVector, 1861
 - DoDimension, 1861
 - DoElements, 1864
 - DoTable, 1863
 - DoTempSet, 1864
 - DumpNode, 1859
 - DumpTree, 1859
 - EmptyTable, 1863
 - EntVar, 1858
 - FreeNameTree, 1860
 - GetAutoName, 1858
 - GetDollar, 1858
 - GetFunction, 1857
 - GetLabel, 1865
 - GetLastExprName, 1857
 - GetName, 1857
 - GetNode, 1857
 - GetNumber, 1857
 - GetOName, 1858
 - GetVar, 1858

- GetWildcardName, [1860](#)
- Globalize, [1866](#)
- LinkTree, [1859](#)
- MakeDubious, [1865](#)
- MakeNameTree, [1859](#)
- NameConflict, [1865](#)
- RemoveDollars, [1866](#)
- ReplaceDollar, [1864](#)
- ResetVariables, [1865](#)
- TestName, [1866](#)
- NamesFlag
 - C_const, [57](#)
- namesize
 - ExPrEsSiOn, [123](#)
 - FuNcTiOn, [145](#)
 - InDeX, [150](#)
 - NaMeTree, [267](#)
 - SeTs, [389](#)
 - SyMbOl, [430](#)
 - VeCtOr, [489](#)
- NaMeSpAcE, [264](#)
 - name, [265](#)
 - next, [265](#)
 - previous, [265](#)
 - usenames, [265](#)
- NAMETREE
 - structs.h, [2934](#)
- NaMeTree, [266](#)
 - clearnamefill, [268](#)
 - clearnodefill, [268](#)
 - globalnamefill, [268](#)
 - globalnodefill, [268](#)
 - headnode, [268](#)
 - namebuffer, [266](#)
 - namefill, [267](#)
 - namenode, [266](#)
 - namesize, [267](#)
 - nodefill, [267](#)
 - nodesize, [267](#)
 - oldnamefill, [267](#)
 - oldnodefill, [267](#)
- nAOPI
 - Assign, [25](#)
 - Process, [373](#)
 - SProcess, [415](#)
- nargs
 - N_const, [256](#)
 - PaRtl, [326](#)
 - pReVaR, [365](#)
- narticuls
 - MConn, [202](#)
- nartps
 - MCBlock, [193](#)
- nbacked
 - MConn, [201](#)
- nBer
 - T_const, [443](#)
- nblksp
 - MConn, [203](#)
- nblocks
 - dbase, [79](#)
 - MConn, [202](#)
- nBridges
 - T_MGraph, [454](#)
- nbridges
 - MConn, [201](#)
- nCallRefine
 - MGraph, [215](#)
 - T_MGraph, [455](#)
- NCand, [269](#)
 - ~NCand, [269](#)
 - deg, [270](#)
 - ilist, [270](#)
 - NCand, [269](#)
 - nilist, [270](#)
 - prNCand, [269](#)
 - st, [270](#)
- ncase
 - SWITCHTABLE, [428](#)
- NCInput, [270](#)
 - cldeg, [271](#)
 - clnum, [271](#)
 - cltyp, [271](#)
 - cmaxd, [271](#)
 - cmind, [271](#)
 - cple, [271](#)
 - ptcl, [271](#)
- ncl
 - ToPoTyPe, [475](#)
- nclass
 - PNodeClass, [342](#)
 - SProcess, [412](#)
- nClasses
 - MGraph, [213](#)
 - MNodeClass, [226](#)
 - T_MGraph, [453](#)
 - T_MNodeClass, [460](#)
- nclist
 - Interaction, [161](#)
- ncmod
 - C_const, [65](#)
 - N_const, [260](#)
- NCOPY
 - declare.h, [809](#)
- NCOPYB
 - declare.h, [809](#)
- NCOPYI
 - declare.h, [809](#)
- NCOPYI32
 - declare.h, [810](#)
- ncouple
 - MInput, [219](#)
 - Model, [232](#)
 - SProcess, [413](#)
- ncouplings
 - MoDeL, [237](#)

- VerTex, [491](#)
- ncplgcp
 - Model, [234](#)
- nctopic
 - MConn, [201](#)
- nd2cl
 - PNodeClass, [342](#)
 - SProcess, [412](#)
- nd2or
 - MOrbits, [241](#)
- ndcl
 - MNodeClass, [225](#)
 - T_MNodeClass, [461](#)
- NDEBUG
 - form3.h, [1344](#)
- ndiag
 - T_MGraph, [453](#)
- ndtype
 - ENode, [118](#)
- ne0bridges
 - MConn, [202](#)
- ne1bridges
 - MConn, [202](#)
- neblocks
 - MConn, [202](#)
- neclass
 - SGroup, [393](#)
- nEdges
 - Assign, [25](#)
 - EGraph, [112](#)
 - MGraph, [212](#)
 - SProcess, [413](#)
 - T_EGraph, [448](#)
 - T_MGraph, [452](#)
- nedges
 - DGraph, [81](#)
 - MCOpI, [205](#)
- NeedNumber
 - declare.h, [810](#)
- NEG0_
 - ftypes.h, [1443](#)
- NEG_
 - ftypes.h, [1443](#)
- nElem
 - SGroup, [392](#)
- nelem
 - SGroup, [393](#)
- Nest
 - T_const, [433](#)
- NESTING
 - structs.h, [2936](#)
- NeStInG, [272](#)
 - argsize, [272](#)
 - funsize, [272](#)
 - termsize, [272](#)
- NestingChecksum
 - declare.h, [823](#)
- nestingsum
- SWITCH, [428](#)
- NestPoin
 - T_const, [433](#)
- NestStop
 - T_const, [433](#)
- nETotal
 - Assign, [25](#)
- neutral
 - Particle, [330](#)
- newAGraph
 - Options, [305](#)
- newbracketinfo
 - ExPrEsSiOn, [122](#)
- NEWCODE
 - reshuf.c, [2643](#)
- NewDbase
 - declare.h, [992](#)
 - minos.c, [1760](#)
- NEWFACTARG
 - ftypes.h, [1465](#)
- newGraph
 - MGraph, [211](#)
- newGroup
 - SGroup, [392](#)
- newhandle
 - HANDLERS, [147](#)
- newleg
 - ANode, [12](#)
- newlogonly
 - HANDLERS, [147](#)
- NEWLYDEFINEDEXPRESSION
 - ftypes.h, [1442](#)
- newmaxtermsize
 - sOrT, [405](#)
- newMGraph
 - Options, [304](#)
- NEWORDER
 - argument.c, [496](#)
- NewSort
 - declare.h, [862](#)
 - sort.c, [2751](#)
- NEWSPLITMERGE
 - sort.c, [2749](#)
- NEWSPLITMERGETIMSORT
 - sort.c, [2749](#)
- NEWSTATEMENT
 - ftypes.h, [1386](#)
- NEWTRICK
 - reken.c, [2585](#)
- next
 - BrAcKeTiNdEx, [32](#)
 - FiLeInDeX, [133](#)
 - longMultiStruct, [167](#)
 - MCBridge, [194](#)
 - MCOpI, [205](#)
 - NaMeSpAcE, [265](#)
 - StOrEcAcHe, [416](#)
- NEXTARG

- declare.h, [814](#)
- nextchar
 - StreaM, [424](#)
- nextElem
 - SGroup, [393](#)
- nExtern
 - Assign, [25](#)
 - EGraph, [112](#)
 - MGraph, [213](#)
 - Process, [371](#)
 - SProcess, [413](#)
 - T_EGraph, [449](#)
- NextFileIndex
 - declare.h, [829](#)
 - store.c, [2865](#)
- NextPrime
 - declare.h, [997](#)
 - reken.c, [2595](#)
- nfac
 - T_const, [443](#)
- nfactors
 - DoLIaRS, [89](#)
- nfial
 - FGInput, [127](#)
 - Process, [371](#)
 - SProcess, [412](#)
- nFlines
 - EGraph, [114](#)
- nfun
 - PaRtl, [326](#)
- nfunctions
 - InDeXeNtRy, [154](#)
- ngconn
 - MGraph, [215](#)
 - T_MGraph, [455](#)
- ngen
 - MGraph, [215](#)
 - T_MGraph, [455](#)
- ngraphs
 - Process, [372](#)
- nhalfmod
 - C_const, [66](#)
- nlist
 - NCand, [270](#)
 - NStack, [279](#)
- nincoef
 - SHvariables, [396](#)
- nindices
 - InDeXeNtRy, [153](#)
- ninitl
 - FGInput, [127](#)
 - Process, [371](#)
 - SProcess, [412](#)
- nInteracts
 - Model, [233](#)
- ninterms
 - N_const, [255](#)
 - sOrT, [403](#)
- nintPart
 - Model, [233](#)
- nlegs
 - AEdge, [8](#)
 - ANode, [13](#)
 - EEdge, [98](#)
 - Interaction, [161](#)
 - MCOpI, [205](#)
 - ToPoTyPe, [475](#)
- nlist
 - EFLine, [101](#)
- nLoops
 - EGraph, [112](#)
 - MGraph, [212](#)
 - T_MGraph, [453](#)
- nloops
 - ToPoTyPe, [475](#)
- nlpopic
 - MConn, [201](#)
- nm
 - MODNUM, [238](#)
- nmedges
 - MCBlock, [193](#)
- nMGraphs
 - Process, [372](#)
 - SProcess, [414](#)
- nmin4
 - InDeX, [150](#)
- NMIN4SHIFT
 - ftypes.h, [1404](#)
- nMOPI
 - Process, [373](#)
 - SProcess, [414](#)
- nmultiedges
 - MConn, [202](#)
- nNodes
 - Assign, [24](#)
 - EGraph, [112](#)
 - MGraph, [212](#)
 - MNodeClass, [226](#)
 - MOrbits, [241](#)
 - SProcess, [413](#)
 - T_EGraph, [448](#)
 - T_MGraph, [452](#)
 - T_MNodeClass, [460](#)
- nnodes
 - DGraph, [81](#)
 - MCOpI, [204](#)
 - PNodeClass, [342](#)
 - SGroup, [393](#)
- NOAUTO
 - ftypes.h, [1391](#)
- NOBRACKETACTIVE
 - execute.c, [1170](#)
- NOCHECKLOGTYPE
 - ftypes.h, [1403](#)
- NOCOMPRESS
 - minos.h, [1782](#)

- NoCompress
 - C_const, [61](#)
 - R_const, [378](#)
- NODE
 - parallel.c, [2098](#)
- NoDe, [275](#)
 - left, [276](#)
 - lloser, [276](#)
 - lsrc, [276](#)
 - right, [276](#)
 - rloser, [276](#)
 - rsrc, [276](#)
- node, [273](#)
 - calcHash, [274](#)
 - cmp, [274](#)
 - data, [274](#)
 - DoLIaRS, [88](#)
 - DuBiOuS, [93](#)
 - ExPrEsSiOn, [123](#)
 - FuNcTiOn, [145](#)
 - hash, [275](#)
 - InDeX, [150](#)
 - l, [274](#)
 - node, [273](#)
 - operator(), [274](#)
 - r, [274](#)
 - SeTs, [389](#)
 - sign, [274](#)
 - SyMbOl, [430](#)
 - VeCtOr, [489](#)
- NodeEq, [276](#)
 - operator(), [277](#)
- nodefill
 - NaMeTree, [267](#)
- NODEFUNCTION
 - ftypes.h, [1418](#)
- NodeHash, [277](#)
 - operator(), [277](#)
- noden
 - NStack, [278](#)
- nodes
 - AEdge, [8](#)
 - Assign, [25](#)
 - DGraph, [81](#)
 - EEdge, [98](#)
 - EGraph, [109](#)
 - MCBridge, [194](#)
 - MCEdge, [195](#)
 - MCOpi, [204](#)
 - MGraph, [212](#)
 - T_EEdge, [445](#)
 - T_EGraph, [449](#)
 - T_MGraph, [453](#)
- nodesize
 - NaMeTree, [267](#)
- NODOUBLEMASK
 - ftypes.h, [1401](#)
- NOFUNPOWERS
 - ftypes.h, [1456](#)
- nogroundlevel
 - N_const, [258](#)
- NOINDEX
 - ftypes.h, [1445](#)
- NOINVERSES
 - ftypes.h, [1460](#)
- NOLYNDON
 - ftypes.h, [1464](#)
- NONBIPART
 - ftypes.h, [1473](#)
- NOPARALLEL_CONVPOLY
 - ftypes.h, [1384](#)
- NOPARALLEL_DOLLAR
 - ftypes.h, [1384](#)
- NOPARALLEL_NPROC
 - ftypes.h, [1385](#)
- NOPARALLEL_RHS
 - ftypes.h, [1384](#)
- NOPARALLEL_SPECTATOR
 - ftypes.h, [1384](#)
- NOPARALLEL_TBLDOLLAR
 - ftypes.h, [1385](#)
- NOPARALLEL_USER
 - ftypes.h, [1385](#)
- nopi
 - Process, [372](#)
- nopi2p
 - EGraph, [113](#)
- nopic
 - MConn, [201](#)
- nopicomp
 - EGraph, [112](#)
- nopisp
 - MConn, [203](#)
- NOQUADMASK
 - ftypes.h, [1402](#)
- nOrbits
 - MOrbits, [241](#)
- normal
 - Fraction, [140](#)
- normal.c, [1904](#), [1908](#)
 - BracketNormalize, [1907](#)
 - Commute, [1905](#)
 - CompareFunctions, [1905](#)
 - DetCommu, [1906](#)
 - DoDelta, [1906](#)
 - DoesCommu, [1906](#)
 - DoRevert, [1906](#)
 - DoTheta, [1906](#)
 - DropCoefficient, [1907](#)
 - DropSymbols, [1907](#)
 - ExtraSymbol, [1905](#)
 - MAXNUMBEROFNONCOMTERMS, [1905](#)
 - Normalize, [1905](#)
 - SymbolNormalize, [1907](#)
 - TestFunFlag, [1907](#)
 - TreatPolyRatFun, [1906](#)

- NORMALFORMAT
 - ftypes.h, [1402](#)
- Normalize
 - declare.h, [863](#)
 - normal.c, [1905](#)
- normalize
 - poly, [353](#)
- NORMALIZEFLAG
 - ftypes.h, [1450](#)
- NormalModulus
 - declare.h, [872](#)
 - reken.c, [2590](#)
- normalParticle
 - Model, [230](#)
- NormPolyTerm
 - declare.h, [1009](#)
 - notation.c, [1971](#)
- NORMSIZE
 - fsizes.h, [1358](#)
- NoScrat2
 - N_const, [252](#)
- NOSHELL
 - pre.c, [2349](#)
- NoShowInput
 - C_const, [54](#)
 - DoLoOp, [92](#)
- NOSIGMA
 - ftypes.h, [1472](#)
- NOSNAIL
 - ftypes.h, [1473](#)
- NOSPACEFORMAT
 - ftypes.h, [1402](#)
- NoSpacesInNumbers
 - O_const, [285](#)
- NOTADPOLE
 - ftypes.h, [1473](#)
- notation.c, [1970](#), [1973](#)
 - ConvertFromPoly, [1971](#)
 - ConvertToPoly, [1971](#)
 - ExtraSymFun, [1972](#)
 - FindLocalSubterm, [1972](#)
 - FindSubexpression, [1972](#)
 - FindSubterm, [1972](#)
 - LocalConvertToPoly, [1971](#)
 - NormPolyTerm, [1971](#)
 - PrintExtraSymbol, [1972](#)
 - PrintSubtermList, [1972](#)
 - PruneExtraSymbols, [1973](#)
- NOTEQUAL
 - ftypes.h, [1453](#)
- NOTFLOOP
 - ftypes.h, [1474](#)
- NOTRICK
 - ftypes.h, [1402](#)
- NOTSIMPLE
 - ftypes.h, [1473](#)
- NOTSTARTPOS
 - declare.h, [819](#)
- NOUNPACK
 - ftypes.h, [1460](#)
- nPacks
 - longMultiStruct, [166](#)
- npadding
 - ToPoTyPe, [475](#)
- NPAIR1
 - fsizes.h, [1364](#)
- NPAIR2
 - fsizes.h, [1364](#)
- nParticles
 - Model, [232](#)
- nparticles
 - MoDeL, [236](#)
 - VeRtEx, [491](#)
- npList
 - ECand, [95](#)
 - EStack, [120](#)
 - Interaction, [161](#)
- npListn
 - lInput, [148](#)
- npowmod
 - C_const, [65](#)
- nggopt
 - Options, [307](#)
- nselfloops
 - MConn, [202](#)
- NSIG
 - portsignals.h, [2341](#)
- nSize
 - AStack, [29](#)
- nsList
 - Interaction, [161](#)
- NStack, [277](#)
 - ~NStack, [278](#)
 - deg, [278](#)
 - ilist, [279](#)
 - nilist, [279](#)
 - noden, [278](#)
 - NStack, [278](#)
 - print, [278](#)
 - st, [279](#)
- nStack
 - AStack, [28](#)
- nStackP
 - AStack, [29](#)
- nSubproc
 - Process, [371](#)
- nsym
 - EGraph, [110](#)
 - MGraph, [213](#)
 - T_EGraph, [449](#)
 - T_MGraph, [454](#)
- nsym1
 - EGraph, [111](#)
- nsymbols
 - InDeXeNtRy, [153](#)
- nt3

- TrAcEs, [479](#)
- nt4
 - TrAcEs, [479](#)
- num
 - Fraction, [141](#)
 - LIST, [164](#)
 - TrAcEn, [477](#)
 - TrAcEs, [482](#)
- num_terms
 - BracketInfo, [34](#)
- num_visits
 - tree_node, [487](#)
- NUMARG
 - ftypes.h, [1461](#)
- numargs
 - FUN_INFO, [142](#)
 - PaRtl, [326](#)
- NUMARGSFUN
 - ftypes.h, [1409](#)
- number
 - FiLeInDeX, [133](#)
 - FuNcTiOn, [144](#)
 - InDeX, [150](#)
 - MoDoPtDoLIaRS, [238](#)
 - NaMeNode, [264](#)
 - PaRtlcLe, [331](#)
 - SyMbOl, [430](#)
 - VeCtOr, [489](#)
- number_of_terms
 - poly, [350](#)
- NUMBEREXTRAWORDS
 - tools.c, [3110](#)
- NumberFree
 - declare.h, [823](#)
- NumberMalloc
 - declare.h, [822](#)
- NumberMallocAddMemory
 - declare.h, [1004](#)
 - tools.c, [3121](#)
- NumberMemHeap
 - T_const, [436](#)
- NumberMemMax
 - T_const, [440](#)
- NUMBERMEMSTARTNUM
 - tools.c, [3110](#)
- NumberMemTop
 - T_const, [440](#)
- numberofindexblocks
 - iniinfo, [155](#)
- numberofnamesblocks
 - iniinfo, [156](#)
- numberoftables
 - iniinfo, [155](#)
- numbers
 - DICTIONARY, [82](#)
- numblocks
 - FiLe, [130](#)
- numbufs
 - PF_BUFFER, [336](#)
- numcases
 - SWITCH, [427](#)
- numclear
 - LIST, [165](#)
- numcommute
 - comtool.c, [774](#)
 - declare.h, [968](#)
- NumCopy
 - declare.h, [926](#)
 - tools.c, [3119](#)
- numdia
 - TERMINFO, [472](#)
- NumDictionaries
 - O_const, [286](#)
- NumDollars
 - variable.h, [3236](#)
- numdollars
 - INSIDEINFO, [157](#)
- NumDoLoops
 - variable.h, [3232](#)
- NumDubious
 - variable.h, [3236](#)
- numdum
 - CbUf, [72](#)
- numdummies
 - DoLIaRS, [89](#)
 - ExPrEsSiOn, [124](#)
 - TaBlEs, [470](#)
- numelements
 - DICTIONARY, [82](#)
- NUMERATORSYMBOL
 - ftypes.h, [1421](#)
- NUMERICALLOOP
 - ftypes.h, [1388](#)
- NUMERICALVALUE
 - setfile.c, [2723](#)
- NumExpressions
 - variable.h, [3236](#)
- numextern
 - TERMINFO, [472](#)
- NUMFACS
 - fsizes.h, [1359](#)
- NUMFACTORS
 - ftypes.h, [1416](#)
- numfactors
 - ExPrEsSiOn, [124](#)
- numfargs
 - N_const, [256](#)
- NUMFIXED
 - fsizes.h, [1358](#)
- NumFixedFunctions
 - M_const, [177](#)
- NumFixedSets
 - M_const, [177](#)
- numflocs
 - N_const, [256](#)
- NumFound

- N_const, [259](#)
- NumFunctions
 - variable.h, [3234](#)
- numfuninfo
 - N_const, [257](#)
- numfunnies
 - FUN_INFO, [142](#)
- NumFunSorts
 - N_const, [257](#)
- numglobal
 - LIST, [165](#)
- NumInBrack
 - O_const, [284](#)
- numind
 - TaBIEs, [468](#)
- NumIndices
 - variable.h, [3234](#)
- numinfilelist
 - tools.c, [3126](#)
- NumLabels
 - C_const, [55](#)
- numlhs
 - CbUf, [73](#)
- numlistinprint
 - N_const, [260](#)
- NumListSymbols
 - T_const, [441](#)
- NumMem
 - T_const, [437](#)
- nummodels
 - C_const, [63](#)
- NumModOptdollars
 - variable.h, [3238](#)
- numoffuns
 - N_const, [256](#)
- NumOldNumFactors
 - S_const, [387](#)
- NumOldOnFile
 - S_const, [387](#)
- NUMOPTIONS
 - fsizes.h, [1365](#)
- NumOutputChannels
 - variable.h, [3236](#)
- numpart
 - PaRtl, [326](#)
- numParticle
 - diawrap.cc, [1068](#)
- numpoly
 - T_const, [441](#)
- NumPotModdollars
 - variable.h, [3237](#)
- NumPre
 - variable.h, [3233](#)
- NumPreSwitchStrings
 - P_const, [320](#)
- NumPreTypes
 - DoLoOp, [92](#)
 - P_const, [320](#)
- NumProcedures
 - variable.h, [3232](#)
- numrbufs
 - ParallelVars, [325](#)
- numrhs
 - CbUf, [73](#)
- numsbufs
 - ParallelVars, [325](#)
- NumSetElements
 - variable.h, [3234](#)
- NumSets
 - variable.h, [3234](#)
- NUMSPECSETS
 - ftypes.h, [1446](#)
- NumSpectatorFiles
 - M_const, [183](#)
- NUMSTORECACHES
 - fsizes.h, [1364](#)
- NumStoreCaches
 - M_const, [190](#)
- NumStreams
 - C_const, [56](#)
- numsym
 - POLYMOD, [363](#)
- NumSymbols
 - variable.h, [3234](#)
- NumTableBases
 - variable.h, [3234](#)
- NUMTABLEENTRIES
 - fsizes.h, [1360](#)
- numtables
 - TaBIEbAsE, [463](#)
- numtasks
 - ParallelVars, [324](#)
- numtemp
 - LIST, [165](#)
- NumTerms
 - CbUf, [72](#)
- NUMTERMSFUN
 - ftypes.h, [1412](#)
- NUMTOIND
 - ftypes.h, [1435](#)
- NUMTONUM
 - ftypes.h, [1435](#)
- numtopo
 - TERMINFO, [471](#)
- NumToStr
 - declare.h, [922](#)
 - tools.c, [3117](#)
- NUMTOSUB
 - ftypes.h, [1435](#)
- NUMTOSYM
 - ftypes.h, [1435](#)
- NumTotWildArgs
 - N_const, [255](#)
- numtracesctack
 - N_const, [257](#)
- numtree

- CbUf, 74
 - TaBIEs, 469
- NumVectors
 - variable.h, 3234
- NumWild
 - N_const, 259
- NumWildcardNames
 - C_const, 55
- numwildcards
 - FUN_INFO, 142
- numxsymbol
 - variable.h, 3237
- nvectors
 - InDeXeNtRy, 154
- nvert
 - SProcess, 413
 - ToPoTyPe, 475
- nvertices
 - MoDeL, 236
- NwildC
 - C_const, 66
- O
 - AllGlobals, 11
- O_BACKWARD
 - ftypes.h, 1466
- O_const, 279
 - BlockSpaces, 285
 - bracket, 282
 - bufferedInd, 288
 - CheckPower, 284
 - CurBufWrt, 282
 - CurDictFunWithArgs, 286
 - CurDictInDollars, 287
 - CurDictNotInFunctions, 286
 - CurDictNumbers, 286
 - CurDictNumberWarning, 286
 - CurDictSpecials, 286
 - CurDictVariables, 286
 - CurrentDictionary, 285
 - Dictionaries, 284
 - DollarInOutBuffer, 285
 - DollarOutBuffer, 282
 - DollarOutSizeBuffer, 285
 - DoubleFlag, 288
 - ErrorBlock, 289
 - FactorMode, 288
 - FactorNum, 289
 - FlipLONG, 283
 - FlipPOINTER, 283
 - FlipPOS, 283
 - FlipWORD, 283
 - FortDotChar, 289
 - FortFirst, 288
 - gNumDictionaries, 287
 - IndentSpace, 287
 - InFbrack, 288
 - inscheme, 284
 - IsBracket, 288
 - mpower, 287
 - NoSpacesInNumbers, 285
 - NumDictionaries, 286
 - NumInBrack, 284
 - OptimizationLevel, 289
 - Optimize, 285
 - OptimizeResult, 281
 - OutFill, 282
 - OutInBuffer, 285
 - OutputLine, 281
 - OutSkip, 288
 - OutStop, 281
 - powerFlag, 287
 - PrintType, 288
 - RenumVec, 284
 - ResizeData, 283
 - resizeFlag, 287
 - ResizeLONG, 283
 - ResizeNCWORD, 283
 - ResizePOINTER, 284
 - ResizePOS, 284
 - ResizeWORD, 283
 - SaveData, 281
 - SaveHeader, 281
 - schemenum, 287
 - SizeDictionaries, 286
 - tabstring, 282
 - tensorList, 284
 - termbuf, 282
 - transFlag, 287
 - wlen, 285
 - wpoin, 282
 - wpos, 282
- O_CSE
 - ftypes.h, 1466
- O_CSEGREEDY
 - ftypes.h, 1466
- O_FORWARD
 - ftypes.h, 1466
- O_FORWARDANDBACKWARD
 - ftypes.h, 1467
- O_FORWARDORBACKWARD
 - ftypes.h, 1467
- O_GREEDY
 - ftypes.h, 1466
- O_MCTS
 - ftypes.h, 1466
- O_NONE
 - ftypes.h, 1465
- O_OCCURRENCE
 - ftypes.h, 1466
- O_SIMULATED_ANNEALING
 - ftypes.h, 1466
- obj1
 - DiStRiBuTe, 85
- obj2
 - DiStRiBuTe, 85
- objects, 289

- date, 290
- element, 291
- indexblock, 151
- PeRmUtE, 332
- PeRmUtEp, 333
- position, 290
- size, 290
- spare1, 290
- spare2, 290
- spare3, 291
- tablenumber, 290
- uncompressed, 290
- occurrence_order
 - optimize.cc, 2023
- ODD_
 - ftypes.h, 1443
- OffsetIndex
 - M_const, 186
- OffsetVector
 - M_const, 186
- OFFSHELL
 - ftypes.h, 1472
- oldcbuf
 - INSIDEINFO, 157
- OldChildTime
 - M_const, 175
- oldcnumlhs
 - INSIDEINFO, 158
- oldcompiletype
 - INSIDEINFO, 157
- olddelay
 - StreaM, 424
- OLDFACTARG
 - ftypes.h, 1465
- OldFactArgFlag
 - C_const, 61
- OldGCDflag
 - C_const, 62
- oldhandle
 - HANDLERS, 147
- oldlogonly
 - HANDLERS, 147
- OldMilliTime
 - M_const, 175
- oldnamefill
 - NaMeTree, 267
- oldnodefill
 - NaMeTree, 267
- oldnoshowinput
 - StreaM, 424
- oldnumextrasymbols
 - M_const, 173
- OldNumFactors
 - S_const, 387
- oldnumpotmoddollars
 - INSIDEINFO, 157
- OldOnFile
 - S_const, 386
- OldOrderFlag
 - M_const, 188
- oldparallelflag
 - INSIDEINFO, 157
- OldParallelStats
 - C_const, 58
- OldPosIn
 - N_const, 248
- OldPosOut
 - N_const, 248
- oldprinttype
 - HANDLERS, 147
- oldrbuf
 - INSIDEINFO, 158
- OldSecTime
 - M_const, 175
- oldsilent
 - HANDLERS, 147
- OLDSTATEMENT
 - ftypes.h, 1386
- OldTime
 - R_const, 377
- oldtype
 - N_const, 258
- Olduflags
 - S_const, 387
- oldvalue
 - N_const, 258
- Oldvflags
 - S_const, 387
- OMPI_SKIP_MPICXX
 - parallel.h, 2172
- one_byte
 - structs.h, 2935
- ONEEXPRESSION
 - ftypes.h, 1389
- ONEPARTI
 - ftypes.h, 1472
- ONEPARTR
 - ftypes.h, 1472
- ONEPI
 - ftypes.h, 1418
- onerhs
 - M_const, 191
- onfile
 - ExPrEsSiOn, 121
- ONLYFUNCTIONS
 - ftypes.h, 1467
- ONOFFVALUE
 - setfile.c, 2724
- ONShell
 - ftypes.h, 1472
- OpenAddFile
 - declare.h, 900
 - tools.c, 3113
- OpenBracketIndex
 - declare.h, 985
 - index.c, 1701

- OpenDbase
 - declare.h, 991
 - minos.c, 1760
- OpenDictionary
 - P_const, 321
- openExternalChannel
 - declare.h, 994
 - extcmd.c, 1206
- OpenFile
 - declare.h, 900
 - tools.c, 3112
- OpenInput
 - declare.h, 891
 - startup.c, 2832
- OpenStream
 - declare.h, 893
 - tools.c, 3111
- OpenTemp
 - declare.h, 863
 - store.c, 2861
- OPER_ADD
 - optimize.cc, 2039
- OPER_COMMA
 - optimize.cc, 2039
- OPER_MUL
 - optimize.cc, 2039
- opera.c, 1987, 1991
 - Chisholm, 1990
 - EpfCon, 1988
 - EpfFind, 1988
 - EpfGen, 1988
 - TenVec, 1990
 - TenVecFind, 1990
 - Trace4, 1988
 - Trace4Gen, 1989
 - Trace4no, 1988
 - TraceFind, 1990
 - TraceN, 1989
 - TraceNgen, 1989
 - TraceNno, 1989
 - Traces, 1989
 - Trick, 1988
- OperaFind
 - FixedGlobals, 134
- Operation
 - FixedGlobals, 134
- operator!=
 - poly, 348
- operator<
 - BracketInfo, 34
 - optimization, 293
- operator<<
 - polyfact.cc, 2270
- operator()
 - CSEEq, 77
 - CSEHash, 77
 - monomial_larger, 239
 - node, 274
 - NodeEq, 277
 - NodeHash, 277
- operator+
 - poly, 347
- operator+=
 - poly, 346
- operator-
 - poly, 347
- operator-=
 - poly, 346
- operator/
 - poly, 347
- operator/=
 - poly, 346
- operator=
 - poly, 348
 - tree_node, 486
- operator==
 - poly, 347
- operator%
 - poly, 347
- operator%=
 - poly, 347
- operator[]
 - poly, 348
- operator*
 - poly, 347
- operator*=
 - poly, 346
- opi
 - MGraph, 215
 - T_EGraph, 449
- opi2plp
 - EGraph, 113
- opicomp
 - EEdge, 100
- opiCount
 - EGraph, 114
- opics
 - MConn, 200
- opiloop
 - MGraph, 215
- opisp
 - MConn, 200
- opistk
 - MConn, 200
- opistkptr
 - MConn, 203
- opt
 - Assign, 24
 - EGraph, 109
 - MGraph, 211
 - Output, 313
 - Process, 370
 - SProcess, 411
 - ToPoTyPe, 474
- OptDef, 291
 - defaultv, 292

- DUMMYPADDING, [292](#)
- mean, [291](#)
- name, [291](#)
- OPTHEAD
 - ftypes.h, [1467](#)
- optimization, [292](#)
 - arg1, [293](#)
 - arg2, [294](#)
 - coeff, [294](#)
 - eqnidxs, [294](#)
 - improve, [294](#)
 - operator<, [293](#)
 - type, [293](#)
- OptimizationLevel
 - O_const, [289](#)
- OPTIMIZE, [295](#)
 - debugflags, [297](#)
 - fval, [295](#)
 - greedymaxperc, [297](#)
 - greedyminnum, [296](#)
 - greedytimelimit, [296](#)
 - horner, [295](#)
 - hornerdirection, [296](#)
 - ival, [295](#)
 - mctsdecaymode, [297](#)
 - mctsnumexpand, [296](#)
 - mctsnumkeep, [296](#)
 - mctsnumrepeat, [296](#)
 - mctstimelimit, [296](#)
 - method, [296](#)
 - printstats, [297](#)
 - salter, [297](#)
 - schemeflags, [297](#)
 - spare, [297](#)
- Optimize
 - declare.h, [974](#)
 - O_const, [285](#)
 - optimize.cc, [2036](#)
- optimize.cc, [2019](#), [2041](#)
 - build_Horner_tree, [2025](#)
 - buildTree, [2029](#)
 - ClearOptimize, [2038](#)
 - count_operators, [2023](#)
 - count_operators_cse, [2029](#)
 - count_operators_cse_topdown, [2029](#)
 - DivLong_fix_args, [2025](#)
 - do_optimization, [2032](#)
 - find_Horner_MCTS, [2030](#)
 - find_Horner_MCTS_expand_tree, [2029](#)
 - find_optimizations, [2031](#)
 - fixarg, [2025](#)
 - GcdLong_fix_args, [2025](#)
 - generate_expression, [2035](#)
 - generate_instructions, [2028](#)
 - generate_output, [2035](#)
 - get_brackets, [2022](#)
 - get_expression, [2022](#)
 - getpower, [2024](#)
 - hash_range, [2027](#)
 - Horner_tree, [2027](#)
 - mcts_best_schemes, [2041](#)
 - mcts_expr_score, [2040](#)
 - mcts_factorized, [2040](#)
 - mcts_root, [2040](#)
 - mcts_separated, [2040](#)
 - mcts_vars, [2040](#)
 - merge_operators, [2030](#)
 - my_random_shuffle, [2021](#)
 - occurrence_order, [2023](#)
 - OPER_ADD, [2039](#)
 - OPER_COMMA, [2039](#)
 - OPER_MUL, [2039](#)
 - Optimize, [2036](#)
 - optimize_best_Horner_schemes, [2039](#)
 - optimize_best_instr, [2040](#)
 - optimize_best_num_oper, [2040](#)
 - optimize_best_vars, [2040](#)
 - optimize_expr, [2039](#)
 - optimize_expression_given_Horner, [2034](#)
 - optimize_greedy, [2032](#)
 - optimize_num_vars, [2039](#)
 - optimize_print_code, [2036](#)
 - partial_factorize, [2032](#)
 - print_instr, [2021](#)
 - print_tree, [2027](#)
 - recycle_variables, [2033](#)
 - simulated_annealing, [2029](#)
 - term_compare, [2026](#)
- optimize_best_Horner_schemes
 - optimize.cc, [2039](#)
- optimize_best_instr
 - optimize.cc, [2040](#)
- optimize_best_num_oper
 - optimize.cc, [2040](#)
- optimize_best_vars
 - optimize.cc, [2040](#)
- optimize_expr
 - optimize.cc, [2039](#)
- optimize_expression_given_Horner
 - optimize.cc, [2034](#)
- optimize_greedy
 - optimize.cc, [2032](#)
- optimize_num_vars
 - optimize.cc, [2039](#)
- optimize_print_code
 - declare.h, [1025](#)
 - optimize.cc, [2036](#)
- OPTIMIZERESULT, [298](#)
 - code, [298](#)
 - codesize, [298](#)
 - exprnr, [298](#)
 - maxvar, [299](#)
 - minvar, [299](#)
 - nameofexpr, [298](#)
- OptimizeResult
 - O_const, [281](#)

- optintimes
 - T_const, [440](#)
- option
 - SHvariables, [397](#)
- OPTION0
 - compiler.c, [730](#)
- OPTION1
 - compiler.c, [730](#)
- OPTION2
 - compiler.c, [730](#)
- Options, [299](#)
 - ~Options, [301](#)
 - argag, [306](#)
 - argemg, [306](#)
 - argmg, [306](#)
 - begin, [304](#)
 - beginProc, [304](#)
 - beginSubProc, [304](#)
 - DUMMYPADDING, [307](#)
 - end, [304](#)
 - endmg, [306](#)
 - endProc, [304](#)
 - endSubProc, [304](#)
 - getDef, [303](#)
 - getOldDef, [303](#)
 - getQGDef, [303](#)
 - getValue, [301](#)
 - model, [305](#)
 - newAGraph, [305](#)
 - newMGraph, [304](#)
 - nqgopt, [307](#)
 - Options, [301](#)
 - out, [305](#)
 - outag, [306](#)
 - outmg, [305](#)
 - outModel, [305](#)
 - print, [302](#)
 - printLevel, [302](#)
 - printModel, [302](#)
 - proc, [305](#)
 - qgopt, [306](#)
 - qgref, [306](#)
 - setDefaultValues, [301](#)
 - setEndMG, [303](#)
 - setErExit, [303](#)
 - setOldDefaultValues, [301](#)
 - setOutAG, [303](#)
 - setOutMG, [302](#)
 - setOutputF, [302](#)
 - setOutputP, [302](#)
 - setQGrafOpt, [301](#)
 - setValue, [301](#)
 - sproc, [305](#)
 - time0, [307](#)
 - time1, [307](#)
 - values, [306](#)
- OptQGDef, [307](#)
 - cname, [308](#)
 - mean, [308](#)
 - name, [308](#)
- optQGrafA
 - EGraph, [105](#)
- optQGrafM
 - EGraph, [105](#)
- OptQGRef, [308](#)
 - index, [308](#)
 - name, [308](#)
 - sign, [309](#)
- or2nd
 - MOrbits, [241](#)
- orbits
 - Assign, [24](#)
 - MGraph, [212](#)
- ORCOND
 - ftypes.h, [1453](#)
- ORDEREDSET
 - ftypes.h, [1470](#)
- Ordering
 - M_const, [187](#)
- origin
 - C_const, [63](#)
- out
 - DiStRiBuTe, [85](#)
 - Options, [305](#)
- outag
 - Options, [306](#)
- outBeginF
 - Output, [310](#)
- outBeginP
 - Output, [311](#)
- OutBuffer
 - M_const, [172](#)
- OutBufSize
 - M_const, [176](#)
- outEGraphF
 - Output, [312](#)
- outEGraphP
 - Output, [312](#)
- outEndF
 - Output, [311](#)
- outEndP
 - Output, [311](#)
- outfile
 - R_const, [376](#)
- OutFill
 - O_const, [282](#)
- outfun
 - SHvariables, [395](#)
- outgrf
 - Output, [313](#)
- outgrfp
 - Output, [313](#)
- outgrp
 - Output, [314](#)
- outgrpp
 - Output, [314](#)

- OutInBuffer
 - O_const, 285
- outmg
 - Options, 305
- outModel
 - Options, 305
- outModelF
 - Output, 312
- outModelP
 - Output, 313
- OutNumberType
 - C_const, 67
- outproc
 - Output, 314
- outProcBegin0
 - Output, 311
- outProcBeginF
 - Output, 311
- outProcBeginP
 - Output, 311
- outProcEndF
 - Output, 312
- outProcEndP
 - Output, 312
- outProcP
 - Process, 369
- Output, 309
 - ~Output, 310
 - model, 313
 - opt, 313
 - outBeginF, 310
 - outBeginP, 311
 - outEGraphF, 312
 - outEGraphP, 312
 - outEndF, 311
 - outEndP, 311
 - outgrf, 313
 - outgrfp, 313
 - outgrp, 314
 - outgrpp, 314
 - outModelF, 312
 - outModelP, 313
 - outproc, 314
 - outProcBegin0, 311
 - outProcBeginF, 311
 - outProcBeginP, 311
 - outProcEndF, 312
 - outProcEndP, 312
 - Output, 310
 - outSProcBeginF, 312
 - outSProcBeginP, 312
 - proc, 313
 - proclid, 314
 - setOutgrf, 310
 - setOutgrp, 310
 - sproc, 313
- OutputLine
 - O_const, 281
- OutputMode
 - C_const, 67
- outputmode
 - sOrT, 405
- OutputOnePI
 - lus.c, 1718
- OUTPUTONLY
 - minos.h, 1782
- OutputSpaces
 - C_const, 67
- outsidefun
 - C_const, 57
- OutSkip
 - O_const, 288
- outSProcBeginF
 - Output, 312
- outSProcBeginP
 - Output, 312
- OutStop
 - O_const, 281
- outterm
 - SHvariables, 395
- outtohide
 - R_const, 379
- P
 - AllGlobals, 11
- p
 - BracketInfo, 34
 - DoLoOp, 90
 - PROCEDURE, 367
- p1
 - PoSiTiOn, 364
- P_const, 315
 - AllowDelay, 320
 - cComChar, 322
 - ComChar, 322
 - cprocedureExtension, 318
 - DebugFlag, 322
 - DelayPrevar, 320
 - DollarList, 316
 - eat, 321
 - firstnamespace, 317
 - fullname, 317
 - fullnamesize, 321
 - gNumPre, 321
 - iBufError, 319
 - InOutBuf, 319
 - inside, 317
 - lastnamespace, 317
 - lhdollarerror, 321
 - LoopList, 316
 - MaxPreAssignLevel, 321
 - MaxPreIfLevel, 320
 - MaxPreTypes, 320
 - NumPreSwitchStrings, 320
 - NumPreTypes, 320
 - OpenDictionary, 321
 - PreAssignFlag, 319

- PreAssignLevel, [321](#)
- PreAssignStack, [318](#)
- PreContinuation, [319](#)
- PreDebug, [321](#)
- preError, [322](#)
- preFill, [318](#)
- PreIfLevel, [320](#)
- PreIfStack, [318](#)
- PreInsideLevel, [320](#)
- PreOut, [319](#)
- PreproFlag, [319](#)
- preStart, [317](#)
- preStop, [317](#)
- PreSwitchLevel, [319](#)
- PreSwitchModes, [318](#)
- PreSwitchStrings, [317](#)
- PreTypes, [318](#)
- PreVarList, [316](#)
- procedureExtension, [318](#)
- ProcList, [317](#)
- pSize, [319](#)
- StopWatchZero, [318](#)
- P_term
 - fwin.h, [1514](#)
 - unix.h, [3225](#)
- Pack
 - declare.h, [864](#)
 - reken.c, [2586](#)
- PACK_LONG
 - parallel.c, [2096](#)
- PackFloat
 - evaluate.c, [1158](#)
 - float.c, [1305](#)
- packpos
 - longMultiStruct, [166](#)
- padding
 - SWITCH, [428](#)
 - T_EEdge, [446](#)
- parallel
 - ParallelVars, [324](#)
- parallel.c, [2093](#), [2119](#)
 - _CHECK, [2096](#)
 - __CHECK, [2097](#)
 - CHECK, [2096](#)
 - DBGOUT, [2097](#)
 - DBGOUT_NINTERMS, [2097](#)
 - NODE, [2098](#)
 - PACK_LONG, [2096](#)
 - PF, [2118](#)
 - PF_BroadcastBuffer, [2108](#)
 - PF_BroadcastCBuf, [2113](#)
 - PF_BroadcastExpFlags, [2113](#)
 - PF_BroadcastExpr, [2114](#)
 - PF_BroadcastModifiedDollars, [2111](#)
 - PF_BroadcastNumber, [2107](#)
 - PF_BroadcastPreDollar, [2109](#)
 - PF_BroadcastRedefinedPreVars, [2112](#)
 - PF_BroadcastRHS, [2114](#)
 - PF_BroadcastString, [2108](#)
 - PF_CollectModifiedDollars, [2110](#)
 - PF_Deferred, [2103](#)
 - PF_EndSort, [2102](#)
 - PF_FlushStdOutBuffer, [2118](#)
 - PF_FreeErrorMessageBuffers, [2118](#)
 - PF_GetSlaveTimes, [2107](#)
 - PF_Init, [2105](#)
 - PF_InParallelProcessor, [2115](#)
 - PF_IRecvRbuf, [2100](#)
 - PF_LibInit, [2098](#)
 - PF_LibTerminate, [2099](#)
 - PF_MLock, [2117](#)
 - PF_MUnlock, [2117](#)
 - PF_Probe, [2099](#)
 - PF_Processor, [2104](#)
 - PF_RawProbe, [2102](#)
 - PF_RawRecv, [2101](#)
 - PF_RawSend, [2101](#)
 - PF_RealTime, [2098](#)
 - PF_RecvFile, [2116](#)
 - PF_RecvWbuf, [2099](#)
 - PF_RestoreInsideInfo, [2113](#)
 - PF_SendFile, [2115](#)
 - PF_SNDFILEBUFSIZE, [2097](#)
 - PF_STATS_SIZE, [2097](#)
 - PF_StoreInsideInfo, [2112](#)
 - PF_Terminate, [2106](#)
 - PF_WaitRbuf, [2100](#)
 - PF_WriteFileToFile, [2117](#)
 - PRINTFBUF, [2095](#)
 - recvBuffer, [2098](#)
 - SWAP, [2095](#)
 - UNPACK_LONG, [2096](#)
- parallel.h, [2167](#), [2200](#)
 - GNUPREREQ, [2171](#)
 - indices, [2172](#)
 - MASTER, [2169](#)
 - OMPI_SKIP_MPICXX, [2172](#)
 - PF, [2199](#)
 - PF_ANY_MSGTAG, [2172](#)
 - PF_ANY_SOURCE, [2172](#)
 - PF_Bcast, [2173](#)
 - PF_Broadcast, [2178](#)
 - PF_BroadcastBuffer, [2189](#)
 - PF_BroadcastCBuf, [2193](#)
 - PF_BroadcastExpFlags, [2194](#)
 - PF_BroadcastExpr, [2195](#)
 - PF_BroadcastModifiedDollars, [2192](#)
 - PF_BroadcastNumber, [2188](#)
 - PF_BroadcastPreDollar, [2190](#)
 - PF_BroadcastRedefinedPreVars, [2193](#)
 - PF_BroadcastRHS, [2196](#)
 - PF_BroadcastString, [2189](#)
 - PF_BUFFER_MSGTAG, [2170](#)
 - PF_BYTE, [2172](#)
 - PF_CollectModifiedDollars, [2191](#)
 - PF_COMM, [2172](#)

- PF_DATA_MSGTAG, [2170](#)
- PF_Deferred, [2184](#)
- PF_DOLLAR_MSGTAG, [2170](#)
- PF_EMPTY_MSGTAG, [2171](#)
- PF_ENDBUFFER_MSGTAG, [2170](#)
- PF_EndSort, [2183](#)
- PF_ENDSORT_MSGTAG, [2170](#)
- PF_FlushStdOutBuffer, [2199](#)
- PF_GetSlaveTimes, [2188](#)
- PF_Init, [2186](#)
- PF_InParallelProcessor, [2196](#)
- PF_INT, [2172](#)
- PF_ISendSbuf, [2173](#)
- PF_LOG_MSGTAG, [2171](#)
- PF_LongMultiBroadcast, [2183](#)
- PF_LongMultiPack, [2173](#)
- PF_LongMultiPackImpl, [2181](#)
- PF_LongMultiUnpack, [2173](#)
- PF_LongMultiUnpackImpl, [2182](#)
- PF_LongSinglePack, [2179](#)
- PF_LongSingleReceive, [2180](#)
- PF_LongSingleSend, [2180](#)
- PF_LongSingleUnpack, [2179](#)
- PF_maxDollarChunkSize, [2199](#)
- PF_MISC_MSGTAG, [2171](#)
- PF_MLock, [2198](#)
- PF_MUnlock, [2198](#)
- PF_OPT_COLLECT_MSGTAG, [2171](#)
- PF_OPT_HORNER_MSGTAG, [2171](#)
- PF_OPT_MCTS_MSGTAG, [2171](#)
- PF_Pack, [2175](#)
- PF_PackString, [2176](#)
- PF_PrepareLongMultiPack, [2181](#)
- PF_PrepareLongSinglePack, [2178](#)
- PF_PreparePack, [2175](#)
- PF_Processor, [2185](#)
- PF_RawRecv, [2174](#)
- PF_RawSend, [2174](#)
- PF_READY_MSGTAG, [2170](#)
- PF_Receive, [2178](#)
- PF_RecvFile, [2197](#)
- PF_RESET, [2169](#)
- PF_RestoreInsideInfo, [2195](#)
- PF_Send, [2177](#)
- PF_SendFile, [2196](#)
- PF_STDOUT_MSGTAG, [2171](#)
- PF_StoreInsideInfo, [2195](#)
- PF_TERM_MSGTAG, [2170](#)
- PF_Terminate, [2187](#)
- PF_TIME, [2169](#)
- PF_Unpack, [2176](#)
- PF_UnpackString, [2177](#)
- PF_WriteFileToFile, [2198](#)
- PARALLELFLAG
 - ftypes.h, [1385](#)
- parallelflag
 - C_const, [59](#)
- ParallelVars, [323](#)
- exprbufsize, [324](#)
- exprtoto, [324](#)
- log, [325](#)
- me, [324](#)
- mkSlaveInfile, [324](#)
- numrbufs, [325](#)
- numsbufs, [325](#)
- numtasks, [324](#)
- parallel, [324](#)
- rbufs, [324](#)
- rhsInParallel, [324](#)
- sbuf, [323](#)
- slavebuf, [323](#)
- parameter
 - SETUPPARAMETERS, [390](#)
- parent
 - NaMeNode, [263](#)
 - tree, [484](#)
- ParenthesesTest
 - compiler.c, [730](#)
 - declare.h, [963](#)
- ParseNumber
 - declare.h, [808](#)
- ParseSign
 - declare.h, [809](#)
- ParseSignedNumber
 - declare.h, [809](#)
- PARTEST
 - ftypes.h, [1391](#)
- PARTI
 - structs.h, [2937](#)
- PaRtl, [325](#)
- args, [326](#)
- nargs, [326](#)
- nfun, [326](#)
- numargs, [326](#)
- numpart, [326](#)
- psize, [326](#)
- where, [326](#)
- partial_factorize
 - optimize.cc, [2032](#)
- PaRtlcLe, [331](#)
- mass, [331](#)
- number, [331](#)
- spin, [331](#)
- type, [331](#)
- Particle, [327](#)
- ~Particle, [328](#)
- acode, [330](#)
- aname, [329](#)
- aparticle, [328](#)
- cmaxdeg, [330](#)
- cmindeg, [330](#)
- extonly, [330](#)
- id, [329](#)
- isNeutral, [329](#)
- mdl, [329](#)
- name, [329](#)

- neutral, [330](#)
- Particle, [328](#)
- particleCode, [328](#)
- particleName, [328](#)
- pcode, [330](#)
- prParticle, [328](#)
- pType, [330](#)
- typeGName, [329](#)
- typeName, [329](#)
- particle
 - PNodeClass, [341](#)
- particleCode
 - Model, [230](#)
 - Particle, [328](#)
- particleName
 - Model, [230](#)
 - Particle, [328](#)
- particles
 - Model, [232](#)
 - VerTex, [490](#)
- PARTITIONS
 - ftypes.h, [1417](#)
- partitions
 - T_const, [437](#)
- partodoflag
 - C_const, [60](#)
- PasteFile
 - declare.h, [864](#)
 - proces.c, [2462](#)
- PasteTerm
 - declare.h, [829](#)
 - proces.c, [2462](#)
- Patches
 - sOrT, [400](#)
- Path
 - M_const, [172](#)
- PathOutput
 - declare.h, [1036](#)
 - lus.c, [1717](#)
- PATHSEPARATOR
 - fwin.h, [1514](#)
 - unix.h, [3225](#)
- PATHVALUE
 - setfile.c, [2723](#)
- patstop
 - N_const, [249](#)
- pattern
 - BracketInfo, [34](#)
 - TaBIEs, [466](#)
- pattern.c, [2203](#), [2206](#)
 - FindAll, [2205](#)
 - PutInBuffers, [2204](#)
 - SubsInAll, [2205](#)
 - Substitute, [2205](#)
 - TakeIDfunction, [2206](#)
 - TestMatch, [2204](#)
 - TestSelect, [2205](#)
 - TransferBuffer, [2206](#)
- patternbuffer
 - N_const, [252](#)
- patternbuffersize
 - N_const, [260](#)
- PATTERNFUNCTION
 - ftypes.h, [1411](#)
- pBer
 - T_const, [436](#)
- pcode
 - Particle, [330](#)
 - PGInput, [337](#)
 - PInput, [338](#)
- pdef
 - Model, [232](#)
- pdel
 - TrAcEs, [481](#)
- pepf
 - TrAcEs, [480](#)
- PERM
 - structs.h, [2937](#)
- perm
 - TrAcEn, [477](#)
 - TrAcEs, [479](#)
- permg
 - SGroup, [394](#)
- permMat
 - MGraph, [209](#)
- PERMP
 - structs.h, [2937](#)
- perms
 - SGroup, [394](#)
- PERMUTATIONS
 - ftypes.h, [1417](#)
- PeRmUtE, [332](#)
 - cycle, [332](#)
 - n, [332](#)
 - objects, [332](#)
 - sign, [332](#)
- Permute
 - declare.h, [864](#)
 - symmetr.c, [2963](#)
- PERMUTEARG
 - ftypes.h, [1462](#)
- PeRmUtEp, [333](#)
 - cycle, [333](#)
 - n, [333](#)
 - objects, [333](#)
 - sign, [333](#)
- PermuteP
 - declare.h, [865](#)
 - symmetr.c, [2963](#)
- PF
 - parallel.c, [2118](#)
 - parallel.h, [2199](#)
- PF_ANY_MSGTAG
 - parallel.h, [2172](#)
- PF_ANY_SOURCE
 - parallel.h, [2172](#)

PF_Bcast
 mpi.c, [1812](#)
 parallel.h, [2173](#)

PF_Broadcast
 mpi.c, [1817](#)
 parallel.h, [2178](#)

PF_BroadcastBuffer
 parallel.c, [2108](#)
 parallel.h, [2189](#)

PF_BroadcastCBuf
 parallel.c, [2113](#)
 parallel.h, [2193](#)

PF_BroadcastExpFlags
 parallel.c, [2113](#)
 parallel.h, [2194](#)

PF_BroadcastExpr
 parallel.c, [2114](#)
 parallel.h, [2195](#)

PF_BroadcastModifiedDollars
 parallel.c, [2111](#)
 parallel.h, [2192](#)

PF_BroadcastNumber
 parallel.c, [2107](#)
 parallel.h, [2188](#)

PF_BroadcastPreDollar
 parallel.c, [2109](#)
 parallel.h, [2190](#)

PF_BroadcastRedefinedPreVars
 parallel.c, [2112](#)
 parallel.h, [2193](#)

PF_BroadcastRHS
 parallel.c, [2114](#)
 parallel.h, [2196](#)

PF_BroadcastString
 parallel.c, [2108](#)
 parallel.h, [2189](#)

PF_BUFFER, [334](#)
 active, [336](#)
 buff, [334](#)
 fill, [334](#)
 from, [336](#)
 full, [335](#)
 index, [335](#)
 numbufs, [336](#)
 request, [335](#)
 retstat, [335](#)
 status, [335](#)
 stop, [335](#)
 tag, [335](#)
 type, [335](#)

PF_BUFFER_MSGTAG
 parallel.h, [2170](#)

PF_BYTE
 parallel.h, [2172](#)

PF_CollectModifiedDollars
 parallel.c, [2110](#)
 parallel.h, [2191](#)

PF_COMM
 parallel.h, [2172](#)

PF_DATA_MSGTAG
 parallel.h, [2170](#)

PF_Deferred
 parallel.c, [2103](#)
 parallel.h, [2184](#)

PF_DOLLAR_MSGTAG
 parallel.h, [2170](#)

PF_EMPTY_MSGTAG
 parallel.h, [2171](#)

PF_ENDBUFFER_MSGTAG
 parallel.h, [2170](#)

PF_EndSort
 parallel.c, [2102](#)
 parallel.h, [2183](#)

PF_ENDSORT_MSGTAG
 parallel.h, [2170](#)

PF_FlushStdOutBuffer
 parallel.c, [2118](#)
 parallel.h, [2199](#)

PF_FreeErrorMessageBuffers
 parallel.c, [2118](#)

PF_GetSlaveTimes
 parallel.c, [2107](#)
 parallel.h, [2188](#)

PF_Init
 parallel.c, [2105](#)
 parallel.h, [2186](#)

PF_InParallelProcessor
 parallel.c, [2115](#)
 parallel.h, [2196](#)

PF_INT
 parallel.h, [2172](#)

PF_IRecvRbuf
 mpi.c, [1811](#)
 parallel.c, [2100](#)

PF_ISendSbuf
 mpi.c, [1810](#)
 parallel.h, [2173](#)

PF_LibInit
 mpi.c, [1809](#)
 parallel.c, [2098](#)

PF_LibTerminate
 mpi.c, [1809](#)
 parallel.c, [2099](#)

PF_LOG_MSGTAG
 parallel.h, [2171](#)

PF_LongMultiBroadcast
 mpi.c, [1822](#)
 parallel.h, [2183](#)

PF_LongMultiPack
 parallel.h, [2173](#)

PF_LongMultiPackImpl
 mpi.c, [1820](#)
 parallel.h, [2181](#)

PF_LongMultiUnpack
 parallel.h, [2173](#)

PF_LongMultiUnpackImpl

- mpi.c, [1821](#)
- parallel.h, [2182](#)
- PF_LongSinglePack
 - mpi.c, [1818](#)
 - parallel.h, [2179](#)
- PF_LongSingleReceive
 - mpi.c, [1819](#)
 - parallel.h, [2180](#)
- PF_LongSingleSend
 - mpi.c, [1819](#)
 - parallel.h, [2180](#)
- PF_LongSingleUnpack
 - mpi.c, [1818](#)
 - parallel.h, [2179](#)
- PF_maxDollorChunkSize
 - mpi.c, [1822](#)
 - parallel.h, [2199](#)
- PF_MISC_MSGTAG
 - parallel.h, [2171](#)
- PF_MLock
 - parallel.c, [2117](#)
 - parallel.h, [2198](#)
- PF_MUnlock
 - parallel.c, [2117](#)
 - parallel.h, [2198](#)
- PF_OPT_COLLECT_MSGTAG
 - parallel.h, [2171](#)
- PF_OPT_HORNER_MSGTAG
 - parallel.h, [2171](#)
- PF_OPT_MCTS_MSGTAG
 - parallel.h, [2171](#)
- PF_Pack
 - mpi.c, [1814](#)
 - parallel.h, [2175](#)
- PF_PACKSIZE
 - mpi.c, [1807](#)
- PF_PackString
 - mpi.c, [1815](#)
 - parallel.h, [2176](#)
- PF_PrepareLongMultiPack
 - mpi.c, [1820](#)
 - parallel.h, [2181](#)
- PF_PrepareLongSinglePack
 - mpi.c, [1817](#)
 - parallel.h, [2178](#)
- PF_PreparePack
 - mpi.c, [1814](#)
 - parallel.h, [2175](#)
- PF_PrintPackBuf
 - mpi.c, [1813](#)
- PF_Probe
 - mpi.c, [1810](#)
 - parallel.c, [2099](#)
- PF_Processor
 - parallel.c, [2104](#)
 - parallel.h, [2185](#)
- PF_RawProbe
 - mpi.c, [1813](#)
- parallel.c, [2102](#)
- PF_RawRecv
 - mpi.c, [1812](#)
 - parallel.c, [2101](#)
 - parallel.h, [2174](#)
- PF_RawSend
 - mpi.c, [1812](#)
 - parallel.c, [2101](#)
 - parallel.h, [2174](#)
- PF_READY_MSGTAG
 - parallel.h, [2170](#)
- PF_RealTime
 - mpi.c, [1807](#)
 - parallel.c, [2098](#)
- PF_Receive
 - mpi.c, [1816](#)
 - parallel.h, [2178](#)
- PF_RecvFile
 - parallel.c, [2116](#)
 - parallel.h, [2197](#)
- PF_RecvWbuf
 - mpi.c, [1810](#)
 - parallel.c, [2099](#)
- PF_RESET
 - parallel.h, [2169](#)
- PF_RestoreInsideInfo
 - parallel.c, [2113](#)
 - parallel.h, [2195](#)
- PF_Send
 - mpi.c, [1816](#)
 - parallel.h, [2177](#)
- PF_SendFile
 - parallel.c, [2115](#)
 - parallel.h, [2196](#)
- PF_SNDFILEBUFSIZE
 - parallel.c, [2097](#)
- PF_STATS_SIZE
 - parallel.c, [2097](#)
- PF_STDOUT_MSGTAG
 - parallel.h, [2171](#)
- PF_StoreInsideInfo
 - parallel.c, [2112](#)
 - parallel.h, [2195](#)
- PF_TERM_MSGTAG
 - parallel.h, [2170](#)
- PF_Terminate
 - parallel.c, [2106](#)
 - parallel.h, [2187](#)
- PF_TIME
 - parallel.h, [2169](#)
- PF_Unpack
 - mpi.c, [1814](#)
 - parallel.h, [2176](#)
- PF_UnpackString
 - mpi.c, [1815](#)
 - parallel.h, [2177](#)
- PF_WaitRbuf
 - mpi.c, [1811](#)

- parallel.c, [2100](#)
- PF_WriteFileToFile
 - parallel.c, [2117](#)
 - parallel.h, [2198](#)
- pfac
 - T_const, [436](#)
- PFORTRANMODE
 - ftypes.h, [1401](#)
- PGInput, [336](#)
 - cdeg, [337](#)
 - cnum, [337](#)
 - cple, [337](#)
 - ctyp, [337](#)
 - pcode, [337](#)
 - pname, [337](#)
- pgq
 - SGroup, [394](#)
- pgr
 - SGroup, [394](#)
- PHEAD
 - structs.h, [2932](#)
- PHEAD0
 - structs.h, [2932](#)
- PHI
 - ftypes.h, [1418](#)
- pld
 - EGraph, [111](#)
 - MGraph, [212](#)
 - T_EGraph, [448](#)
 - T_MGraph, [452](#)
- PlInput, [338](#)
 - acode, [338](#)
 - aname, [338](#)
 - extonly, [339](#)
 - name, [338](#)
 - pcode, [338](#)
 - ptypec, [338](#)
 - ptypen, [338](#)
- PIPESTREAM
 - ftypes.h, [1381](#)
- PISYMBOL
 - ftypes.h, [1420](#)
- plist
 - ECand, [95](#)
 - EStack, [120](#)
 - Interaction, [160](#)
- plistic
 - lInput, [149](#)
- plisn
 - lInput, [148](#)
- pname
 - PGInput, [337](#)
 - StreaM, [422](#)
- pnclass
 - Assign, [24](#)
 - SProcess, [411](#)
- PNodeClass, [339](#)
 - ~PNodeClass, [340](#)
- cl2mcl, [342](#)
- cl2nd, [342](#)
- cmaxdeg, [341](#)
- cmindeg, [341](#)
- count, [342](#)
- couple, [341](#)
- deg, [341](#)
- nclass, [342](#)
- nd2cl, [342](#)
- nnodes, [342](#)
- particle, [341](#)
- PNodeClass, [340](#)
- prElem, [340](#)
- prPNodeClass, [340](#)
- sproc, [341](#)
- type, [341](#)
- PObuffer
 - FiLe, [129](#)
- POfill
 - FiLe, [129](#)
- POfull
 - FiLe, [129](#)
- poin2a
 - sOrT, [401](#)
- poina
 - sOrT, [401](#)
- PoinFill
 - sOrT, [400](#)
- PoinScratch
 - N_const, [252](#)
- Pointer
 - CbUf, [71](#)
- pointer
 - StreaM, [422](#)
- poly, [344](#)
 - ~poly, [346](#)
 - add, [354](#)
 - all_variables, [350](#)
 - argument_to_poly, [352](#)
 - check_memory, [348](#)
 - coefficient, [351](#)
 - coefficient_list_divmod, [353](#)
 - coefficients_modulo, [351](#)
 - compare_degree_vector, [354](#)
 - degree, [350](#)
 - degree_vector, [354](#)
 - derivative, [351](#)
 - div, [355](#)
 - divides, [356](#)
 - divmod, [356](#)
 - divmod_heap, [359](#)
 - divmod_one_term, [358](#)
 - divmod_univar, [358](#)
 - expand_memory, [348](#)
 - first_variable, [350](#)
 - flint::poly, [343](#)
 - from_coefficient_list, [353](#)
 - get_variables, [352](#)

- integer_lcoeff, [350](#)
- is_dense_univariate, [349](#)
- is_integer, [349](#)
- is_monomial, [349](#)
- is_one, [349](#)
- is_zero, [349](#)
- last_monomial, [354](#)
- last_monomial_index, [354](#)
- lcoeff_multivar, [351](#)
- lcoeff_univar, [351](#)
- mod, [356](#)
- modn, [361](#)
- modp, [361](#)
- monomial_compare, [354](#)
- mul, [355](#)
- mul_heap, [357](#)
- mul_one_term, [357](#)
- mul_univar, [357](#)
- normalize, [353](#)
- number_of_terms, [350](#)
- operator!=, [348](#)
- operator+, [347](#)
- operator+=, [346](#)
- operator-, [347](#)
- operator-=, [346](#)
- operator/, [347](#)
- operator/=: [346](#)
- operator=, [348](#)
- operator==, [347](#)
- operator%, [347](#)
- operator%=: [347](#)
- operator[], [348](#)
- operator*, [347](#)
- operator*=: [346](#)
- poly, [345](#), [346](#)
- poly_to_argument, [352](#)
- poly_to_argument_with_den, [352](#)
- pop_heap, [360](#)
- push_heap, [360](#)
- setmod, [351](#)
- sign, [350](#)
- simple_poly, [351](#), [352](#)
- size_of_form_notation, [353](#)
- size_of_form_notation_with_den, [353](#)
- size_of_terms, [361](#)
- sub, [355](#)
- terms, [361](#)
- termscopy, [348](#)
- to_coefficient_list, [353](#)
- to_string, [354](#)
- total_degree, [350](#)
- poly.cc, [2233](#)
- poly.h, [2266](#)
- poly_determine_modulus
 - polywrap.cc, [2308](#)
- poly_div
 - declare.h, [1018](#)
 - polywrap.cc, [2309](#)
- poly_divmod
 - polywrap.cc, [2309](#)
- poly_factor
 - flint::poly_factor, [362](#)
- poly_factorize
 - polywrap.cc, [2313](#)
- poly_factorize_argument
 - declare.h, [1021](#)
 - polywrap.cc, [2314](#)
- poly_factorize_dollar
 - declare.h, [1022](#)
 - polywrap.cc, [2315](#)
- poly_factorize_expression
 - declare.h, [1022](#)
 - polywrap.cc, [2315](#)
- poly_fix_minus_signs
 - polywrap.cc, [2313](#)
- poly_free_poly_vars
 - declare.h, [1024](#)
 - polywrap.cc, [2318](#)
- poly_gcd
 - declare.h, [1017](#)
 - polywrap.cc, [2308](#)
- poly_inverse
 - declare.h, [1019](#)
 - polywrap.cc, [2317](#)
- poly_mul
 - declare.h, [1019](#)
 - polywrap.cc, [2318](#)
- poly_num_vars
 - N_const, [261](#)
- poly_ratfun_add
 - declare.h, [1019](#)
 - polywrap.cc, [2311](#)
- poly_ratfun_normalize
 - declare.h, [1020](#)
 - polywrap.cc, [2312](#)
- poly_ratfun_read
 - polywrap.cc, [2309](#)
- poly_rem
 - declare.h, [1018](#)
 - polywrap.cc, [2309](#)
- poly_sort
 - polywrap.cc, [2310](#)
- poly_to_argument
 - poly, [352](#)
- poly_to_argument_with_den
 - poly, [352](#)
- poly_unfactorize_expression
 - declare.h, [1023](#)
 - polywrap.cc, [2316](#)
- poly_vars
 - N_const, [254](#)
- poly_vars_type
 - N_const, [261](#)
- PolyAct
 - T_const, [443](#)
- POLYADD

- ftypes.h, 1457
- POLYDIV
 - ftypes.h, 1457
- PolyDiv
 - declare.h, 1014
 - ratio.c, 2539
- polyfact.cc, 2269, 2271
 - operator<<, 2270
- polyfact.h, 2286
- PolyFlag
 - sOrT, 404
- POLYFUN
 - ftypes.h, 1384
- PolyFun
 - R_const, 380
- PolyFunClean
 - declare.h, 858
 - function.c, 1489
- PolyFunDirty
 - declare.h, 858
 - function.c, 1489
- PolyFunExp
 - R_const, 381
- PolyFunInv
 - R_const, 380
- PolyFunMul
 - declare.h, 865
 - proces.c, 2468
- PolyFunPow
 - R_const, 381
- PolyFunTodo
 - N_const, 260
- PolyFunType
 - R_const, 381
- PolyFunVar
 - R_const, 381
- POLYGCD
 - ftypes.h, 1458
- polygcd.cc, 2288, 2289
 - gcd_heuristic_possible, 2288
 - gcd_linear_helper, 2289
- polygcd.h, 2305
- POLYINTFAC
 - ftypes.h, 1458
- POLYMOD, 362
 - arraysize, 363
 - coefs, 363
 - modnum, 363
 - numsym, 363
 - polysize, 363
- POLYMUL
 - ftypes.h, 1457
- POLYNORM
 - ftypes.h, 1458
- PolyNormFlag
 - N_const, 260
- PolyRatFunChanged
 - C_const, 69
- PolyRatFunSpecial
 - declare.h, 978
 - sort.c, 2763
- POLYREM
 - ftypes.h, 1458
- polysize
 - POLYMOD, 363
- polysortflag
 - N_const, 258
- POLYSUB
 - ftypes.h, 1457
- PolyWise
 - sOrT, 404
- polywrap.cc, 2307, 2318
 - poly_determine_modulus, 2308
 - poly_div, 2309
 - poly_divmod, 2309
 - poly_factorize, 2313
 - poly_factorize_argument, 2314
 - poly_factorize_dollar, 2315
 - poly_factorize_expression, 2315
 - poly_fix_minus_signs, 2313
 - poly_free_poly_vars, 2318
 - poly_gcd, 2308
 - poly_inverse, 2317
 - poly_mul, 2318
 - poly_ratfun_add, 2311
 - poly_ratfun_normalize, 2312
 - poly_ratfun_read, 2309
 - poly_rem, 2309
 - poly_sort, 2310
 - poly_unfactorize_expression, 2316
- POLYWRAP_DENOMPOWER_INCREASE_FACTOR,
2318
- POLYWRAP_DENOMPOWER_INCREASE_FACTOR
 - polywrap.cc, 2318
- pop_heap
 - poly, 360
- POposition
 - File, 129
- POPPREASSIGNLEVEL
 - declare.h, 824
- PopPreVars
 - declare.h, 910
 - pre.c, 2351
- PopVariables
 - declare.h, 866
 - execute.c, 1170
- portsignals.h, 2340, 2344
 - FATAL_SIG_ERROR, 2341
 - NSIG, 2341
 - SIGALRM, 2343
 - SIGEMT, 2342
 - SIGFPE, 2341
 - SIGHUP, 2343
 - SIGILL, 2342
 - SIGINT, 2343
 - SIGLOST, 2342

- SIGPIPE, [2342](#)
- SIGPROF, [2343](#)
- SIGQUIT, [2343](#)
- SIGSEGV, [2341](#)
- SIGSYS, [2342](#)
- SIGTERM, [2342](#)
- SIGVTALRM, [2343](#)
- SIGXCPU, [2342](#)
- SIGXFSZ, [2342](#)
- POS0_
 - ftypes.h, [1442](#)
- POS_
 - ftypes.h, [1442](#)
- PoSITiOn, [363](#)
- p1, [364](#)
- Position
 - FiLeDaTa, [132](#)
- position
 - indexblock, [151](#)
 - InDeXeNtRy, [153](#)
 - nameblock, [262](#)
 - objects, [290](#)
 - SpecTatoR, [406](#)
 - StOrEcAcHe, [416](#)
- PositionStream
 - declare.h, [893](#)
 - tools.c, [3112](#)
- POSITIVEONLY
 - ftypes.h, [1460](#)
- POsize
 - FiLe, [130](#)
- POSNEG
 - ftypes.h, [1459](#)
- POstop
 - FiLe, [129](#)
- posWorkPointer
 - T_const, [438](#)
- posWorkSize
 - R_const, [378](#)
- posWorkSpace
 - T_const, [434](#)
- PotModdollars
 - variable.h, [3237](#)
- PotModDoLlist
 - C_const, [44](#)
- pow
 - COST, [76](#)
- power
 - factorized_poly, [126](#)
- powerFlag
 - O_const, [287](#)
- powmod
 - C_const, [48](#)
- pParseObject
 - declare.h, [923](#)
 - pre.c, [2361](#)
- prCand
 - Assign, [17](#)
- pre.c, [2345](#), [2367](#)
 - AddToPreTypes, [2362](#)
 - CharOut, [2350](#)
 - ClearMacro, [2353](#)
 - ClearPushback, [2349](#)
 - ConstructName, [2365](#)
 - DAEMON, [2348](#)
 - defineChannel, [2363](#)
 - DoBreakDo, [2355](#)
 - DoCall, [2354](#)
 - DoClearOptimize, [2364](#)
 - DoClearUserFlag, [2366](#)
 - DoCommentChar, [2353](#)
 - DoContinueDo, [2355](#)
 - DoDebug, [2355](#)
 - DoDefine, [2353](#)
 - DoDo, [2355](#)
 - DoElse, [2355](#)
 - DoElseif, [2356](#)
 - DoEnddo, [2356](#)
 - DoEndif, [2356](#)
 - DoEndInside, [2357](#)
 - DoEndNamespace, [2365](#)
 - DoEndprocedure, [2356](#)
 - DoExternal, [2362](#)
 - DoFactDollar, [2363](#)
 - DoFromExternal, [2363](#)
 - Dof, [2356](#)
 - Dofdef, [2356](#)
 - Dofndef, [2357](#)
 - Dofydef, [2356](#)
 - DoInclude, [2354](#)
 - DoInside, [2357](#)
 - DoMessage, [2357](#)
 - DoNamespace, [2365](#)
 - DoOptimize, [2364](#)
 - DoPipe, [2357](#)
 - DoPrcExtension, [2357](#)
 - DoPreAddSeparator, [2362](#)
 - DoPreAppend, [2358](#)
 - DoPreAppendPath, [2364](#)
 - DoPreAssign, [2353](#)
 - DoPreBreak, [2359](#)
 - DoPreCase, [2359](#)
 - DoPreClose, [2358](#)
 - DoPreCreate, [2358](#)
 - DoPreDefault, [2359](#)
 - DoPreEndSwitch, [2359](#)
 - DoPreExchange, [2354](#)
 - DoPreOut, [2357](#)
 - DoPrePrependPath, [2365](#)
 - DoPrePrintTimes, [2358](#)
 - DoPreRemove, [2358](#)
 - DoPreReset, [2364](#)
 - DoPreRmSeparator, [2362](#)
 - DoPreShow, [2359](#)
 - DoPreSortReallocate, [2358](#)
 - DoPreSwitch, [2359](#)

DoPreWrite, [2358](#)
DoProcedure, [2359](#)
DoPrompt, [2362](#)
DoRedefine, [2353](#)
DoReverseInclude, [2354](#)
DoRmExternal, [2363](#)
DoSetExternal, [2362](#)
DoSetExternalAttr, [2363](#)
DoSetRandom, [2364](#)
DoSetUserFlag, [2366](#)
DoSkipExtraSymbols, [2364](#)
DoSystem, [2360](#)
DoTerminate, [2355](#)
DoTimeOutAfter, [2365](#)
DoToExternal, [2363](#)
DoUndefine, [2354](#)
DoUse, [2366](#)
EvalPrelf, [2360](#)
ExpandTripleDots, [2352](#)
FALSE_EXPR, [2349](#)
FindInKeyWord, [2352](#)
FindKeyWord, [2352](#)
GetChar, [2349](#)
GetDollarNumber, [2364](#)
GetInput, [2349](#)
GetPreVar, [2350](#)
Include, [2354](#)
IniModule, [2351](#)
IniSpecialModule, [2351](#)
KILL, [2348](#)
KILLALL, [2348](#)
LoadInstruction, [2351](#)
LoadStatement, [2351](#)
MessPreNesting, [2362](#)
NOSHELL, [2349](#)
PopPreVars, [2351](#)
pParseObject, [2361](#)
PreCalc, [2361](#)
PreCmp, [2361](#)
PreEq, [2361](#)
PreEval, [2361](#)
PrelfEval, [2360](#)
PreLoad, [2360](#)
PreProcessor, [2351](#)
PreProInstruction, [2351](#)
PreSkip, [2360](#)
PutPreVar, [2350](#)
SHELL, [2348](#)
SKIPBUFSIZE, [2348](#)
SkipName, [2365](#)
StartPrepro, [2360](#)
STDERR, [2348](#)
STRINGIFY, [2348](#)
STRINGIFY_, [2348](#)
TERMINAL, [2349](#)
TheDefine, [2352](#)
TheUndefine, [2354](#)
TRUE_EXPR, [2349](#)
UnsetAllowDelay, [2350](#)
UserFlags, [2366](#)
writeToChannel, [2363](#)
PreAssignFlag
 P_const, [319](#)
PreAssignLevel
 P_const, [321](#)
PreAssignStack
 P_const, [318](#)
PreCalc
 declare.h, [922](#)
 pre.c, [2361](#)
PRECALCSTREAM
 ftypes.h, [1381](#)
prECand
 ECand, [95](#)
PreCmp
 declare.h, [922](#)
 pre.c, [2361](#)
PreContinuation
 P_const, [319](#)
PreDebug
 P_const, [321](#)
prEdges
 MConn, [199](#)
PreEq
 declare.h, [922](#)
 pre.c, [2361](#)
preError
 P_const, [322](#)
PreEval
 declare.h, [922](#)
 pre.c, [2361](#)
preFill
 P_const, [318](#)
PrelfDollarEval
 declare.h, [983](#)
 dollar.c, [1105](#)
PrelfEval
 declare.h, [923](#)
 pre.c, [2360](#)
PrelfLevel
 DoLoOp, [92](#)
 P_const, [320](#)
PrelfStack
 P_const, [318](#)
PreInsideLevel
 P_const, [320](#)
prElem
 PNodeClass, [340](#)
PRELOAD, [364](#)
 buffer, [364](#)
 size, [364](#)
PreLoad
 declare.h, [923](#)
 pre.c, [2360](#)
PRELOWERAFTER
 ftypes.h, [1385](#)

- PRENOACTION
 - ftypes.h, [1385](#)
- PreOut
 - P_const, [319](#)
- PrepPoly
 - declare.h, [866](#)
 - proces.c, [2467](#)
- PreProcessor
 - declare.h, [904](#)
 - pre.c, [2351](#)
- PreproFlag
 - P_const, [319](#)
- PreProInstruction
 - declare.h, [910](#)
 - pre.c, [2351](#)
- PREPROONLY
 - ftypes.h, [1387](#)
- PRERAISEAFTER
 - ftypes.h, [1385](#)
- PreRandom
 - declare.h, [998](#)
 - reken.c, [2596](#)
- PREREADESTREAM
 - ftypes.h, [1381](#)
- PREREADESTREAM2
 - ftypes.h, [1382](#)
- PREREADESTREAM3
 - ftypes.h, [1382](#)
- PreSkip
 - declare.h, [923](#)
 - pre.c, [2360](#)
- preStart
 - P_const, [317](#)
- preStop
 - P_const, [317](#)
- PreSwitchLevel
 - DoLoOp, [93](#)
 - P_const, [319](#)
- PreSwitchModes
 - P_const, [318](#)
- PreSwitchStrings
 - P_const, [317](#)
- PRETYPEDO
 - ftypes.h, [1389](#)
- PRETYPEIF
 - ftypes.h, [1389](#)
- PRETYPEINSIDE
 - ftypes.h, [1389](#)
- PRETYPENONE
 - ftypes.h, [1389](#)
- PRETYPEPROCEDURE
 - ftypes.h, [1389](#)
- PreTypes
 - P_const, [318](#)
- PRETYPESWITCH
 - ftypes.h, [1389](#)
- PREV
 - declare.h, [816](#)
- PREVAR
 - structs.h, [2935](#)
- PreVar
 - variable.h, [3232](#)
- pReVaR, [365](#)
 - argnames, [365](#)
 - name, [365](#)
 - nargs, [365](#)
 - value, [365](#)
 - wildarg, [366](#)
- PreVarList
 - P_const, [316](#)
- prevars
 - StreaM, [423](#)
- PREVARSTREAM
 - ftypes.h, [1381](#)
- previous
 - NaMeSpAcE, [265](#)
 - StreaM, [423](#)
- previousblock
 - indexblock, [151](#)
 - nameblock, [262](#)
- previousEfactor
 - T_const, [436](#)
- previousNoShowInput
 - StreaM, [424](#)
- prevline
 - StreaM, [421](#)
- prFLines
 - EGraph, [108](#)
- primelist
 - T_const, [436](#)
- PRIMENUMBER
 - ftypes.h, [1416](#)
- print
 - EEEdge, [97](#)
 - EFLine, [101](#)
 - EGraph, [104](#)
 - ENode, [117](#)
 - EStack, [119](#)
 - flint::fmpz, [138](#)
 - flint::mpoly, [243](#)
 - flint::poly, [343](#)
 - Fraction, [139](#)
 - MConn, [199](#)
 - MGraph, [209](#)
 - MOrbits, [240](#)
 - NStack, [278](#)
 - Options, [302](#)
 - SGroup, [392](#)
 - T_EGraph, [447](#)
- print_instr
 - optimize.cc, [2021](#)
- print_tree
 - optimize.cc, [2027](#)
- printAdjMat
 - MGraph, [209](#)
- PRINTALL

- ftypes.h, 1441
- PrintBacktraceFlag
 - C_const, 62
- PRINTCONTENT
 - ftypes.h, 1441
- PRINTCONTENTS
 - ftypes.h, 1441
- PrintDeprecation
 - declare.h, 869
 - startup.c, 2834
- prInteraction
 - Interaction, 160
- PrintExtraSymbol
 - declare.h, 1011
 - notation.c, 1972
- PRINTFBUF
 - parallel.c, 2095
- printflag
 - ExPrEsSiOn, 123
- PrintFloat
 - float.c, 1307
- printInput
 - Model, 231
- printLevel
 - Options, 302
- PRINTLFILE
 - ftypes.h, 1441
- printMat
 - MNodeClass, 223
 - T_MNodeClass, 459
- printMInput
 - Model, 231
- printModel
 - Options, 302
- PRINTOFF
 - ftypes.h, 1440
- PRINTON
 - ftypes.h, 1441
- PRINTONEFUNCTION
 - ftypes.h, 1441
- PRINTONETERM
 - ftypes.h, 1441
- printPInput
 - Model, 231
- printPy
 - EGraph, 104
 - MGraph, 209
- PrintRunningTime
 - declare.h, 869
 - startup.c, 2834
- printscratch
 - proces.c, 2469
- PrintSeq
 - declare.h, 927
 - message.c, 1744
- printstats
 - OPTIMIZE, 297
- PrintSubTerm
 - declare.h, 927
 - message.c, 1744
- PrintSubtermList
 - declare.h, 1011
 - notation.c, 1972
- PrintTerm
 - declare.h, 927
 - message.c, 1743
- PrintTermC
 - declare.h, 927
 - message.c, 1744
- PrintTime
 - declare.h, 985
 - sch.c, 2687
- PrintTotalSize
 - M_const, 182
- PrintType
 - O_const, 288
- PrintWords
 - declare.h, 927
 - message.c, 1744
- prModel
 - Model, 229
- prNCand
 - NCand, 269
- proc
 - Assign, 24
 - EGraph, 109
 - Options, 305
 - Output, 313
 - SProcess, 411
- PROCEDURE, 366
 - loadmode, 367
 - mustfree, 367
 - name, 367
 - p, 367
- procedureExtension
 - P_const, 318
- procedureextension
 - setfile.c, 2727
- PROCEDUREFILE
 - ftypes.h, 1383
- Procedures
 - variable.h, 3232
- proces.c, 2457, 2469
 - Deferred, 2466
 - DONE, 2458
 - DoOnePow, 2465
 - FiniTerm, 2463
 - Generator, 2463
 - InFunction, 2459
 - InsertTerm, 2460
 - PasteFile, 2462
 - PasteTerm, 2462
 - PolyFunMul, 2468
 - PrepPoly, 2467
 - printscratch, 2469
 - Processor, 2458

- TestSub, [2459](#)
- Process, [367](#)
 - ~Process, [369](#)
 - agrcount, [370](#)
 - astack, [372](#)
 - clist, [371](#)
 - ctotal, [371](#)
 - finalPart, [370](#)
 - id, [370](#)
 - initlPart, [370](#)
 - loop, [371](#)
 - maxnlegs, [371](#)
 - mgrcount, [370](#)
 - mkSProcess, [369](#)
 - model, [370](#)
 - nAGraphs, [373](#)
 - nAOPI, [373](#)
 - nExtern, [371](#)
 - nfinal, [371](#)
 - ngraphs, [372](#)
 - ninitl, [371](#)
 - nMGraphs, [372](#)
 - nMOPI, [373](#)
 - nopi, [372](#)
 - nSubproc, [371](#)
 - opt, [370](#)
 - outProcP, [369](#)
 - Process, [369](#)
 - prProcess, [369](#)
 - prProcessP, [369](#)
 - sec, [373](#)
 - sproc, [372](#)
 - sptbl, [372](#)
 - wAGraphs, [373](#)
 - wAOPI, [373](#)
 - wgraphs, [372](#)
 - wMGraphs, [373](#)
 - wMOPI, [373](#)
 - wopi, [372](#)
- ProcessBucketSize
 - C_const, [53](#)
- ProcessOption
 - declare.h, [893](#)
 - setfile.c, [2724](#)
- Processor
 - declare.h, [867](#)
 - proces.c, [2458](#)
- ProcessStats
 - C_const, [59](#)
- ProcessTopology
 - diawrap.cc, [1069](#)
- procl
 - Output, [314](#)
- ProcList
 - P_const, [317](#)
- Product
 - declare.h, [868](#)
 - reken.c, [2591](#)
- PRODUCTIONDATE
 - form3.h, [1343](#)
- proexp
 - T_const, [442](#)
- PROPERORDERFLAG
 - ftypes.h, [1457](#)
- properorderflag
 - C_const, [60](#)
- ProtoType
 - C_const, [48](#)
- prototype
 - ExPrEsSiOn, [121](#)
 - TableEs, [465](#)
- prototypeSize
 - TableEs, [468](#)
- prParticle
 - Particle, [328](#)
- prParticleArray
 - Model, [231](#)
- prPNodeClass
 - PNodeClass, [340](#)
- prProcess
 - Process, [369](#)
- prProcessP
 - Process, [369](#)
- prSProcess
 - SProcess, [409](#)
- prStack
 - AStack, [28](#)
- PrtLong
 - declare.h, [868](#)
 - reken.c, [2592](#)
- PrtTerms
 - declare.h, [868](#)
 - sch.c, [2687](#)
- PruneExtraSymbols
 - declare.h, [1013](#)
 - notation.c, [1973](#)
- pSize
 - P_const, [319](#)
- pSize
 - PaRtl, [326](#)
- psq
 - SGroup, [394](#)
- psr
 - SGroup, [394](#)
- pStop
 - sOrT, [401](#)
- ptcl
 - AEdge, [8](#)
 - EEdge, [98](#)
 - NClntput, [271](#)
- pType
 - Particle, [330](#)
- pTypec
 - PInput, [338](#)
- pTypen
 - PInput, [338](#)

- push_heap
 - poly, [360](#)
- pushEdge
 - AStack, [28](#)
 - MConn, [198](#)
- pushNode
 - AStack, [28](#)
 - MConn, [198](#)
- PUSHPREASSIGNLEVEL
 - declare.h, [824](#)
- PutArgInScratch
 - declare.h, [1007](#)
 - transform.c, [3181](#)
- PutBracket
 - declare.h, [869](#)
 - execute.c, [1171](#)
- PutBracketInIndex
 - declare.h, [985](#)
 - index.c, [1700](#)
- PutExtraSymbols
 - declare.h, [1015](#)
 - ratio.c, [2537](#)
- PUTFIRST
 - ftypes.h, [1417](#)
- PutIn
 - declare.h, [869](#)
 - sort.c, [2752](#)
- PutInBuffers
 - pattern.c, [2204](#)
- PutInside
 - declare.h, [863](#)
 - index.c, [1701](#)
- putinsize
 - sOrT, [403](#)
- PutInSpectator
 - declare.h, [1029](#)
 - spectator.c, [2821](#)
- PutInStore
 - declare.h, [870](#)
 - store.c, [2863](#)
- PutInVflags
 - declare.h, [882](#)
 - execute.c, [1171](#)
- PutOut
 - declare.h, [870](#)
 - sort.c, [2753](#)
- PutPreVar
 - declare.h, [891](#)
 - pre.c, [2350](#)
- PutTableNames
 - declare.h, [992](#)
 - minos.c, [1761](#)
- PutTermInDollar
 - declare.h, [968](#)
 - dollar.c, [1103](#)
- PUTZERO
 - declare.h, [818](#)
- PVFUNV
 - ftypes.h, [1474](#)
- PVFUNWP
 - ftypes.h, [1474](#)
- pWorkPointer
 - T_const, [438](#)
- pWorkSize
 - R_const, [378](#)
- pWorkSpace
 - T_const, [434](#)
- Q_
 - ftypes.h, [1444](#)
- qError
 - M_const, [186](#)
- qgopt
 - Options, [306](#)
- qgref
 - Options, [306](#)
- QUADRUPLEFORTRANMODE
 - ftypes.h, [1401](#)
- QUADRUPLEPRECISIONFLAG
 - ftypes.h, [1401](#)
- Quotient
 - declare.h, [871](#)
 - reken.c, [2591](#)
- R
 - AllGlobals, [10](#)
- r
 - node, [274](#)
- R_const, [374](#)
 - BracketOn, [379](#)
 - Cnumlhs, [378](#)
 - CompareRoutine, [377](#)
 - CompressBuffer, [377](#)
 - CompressPointer, [377](#)
 - ComprTop, [377](#)
 - CurDum, [380](#)
 - CurExpr, [382](#)
 - DeferFlag, [380](#)
 - DefPosition, [376](#)
 - Eside, [381](#)
 - expchanged, [381](#)
 - expflags, [382](#)
 - FoStage4, [376](#)
 - Fscr, [376](#)
 - funoffset, [382](#)
 - GetFile, [379](#)
 - GetOneFile, [380](#)
 - gzipCompress, [378](#)
 - hidefile, [376](#)
 - infile, [376](#)
 - InHiBuf, [378](#)
 - InInBuf, [377](#)
 - KeptInHold, [379](#)
 - level, [381](#)
 - IWorkSize, [378](#)
 - MaxBracket, [379](#)
 - MaxDum, [381](#)

- modeloptions, 382
- moebiustable, 377
- moebiustablesizes, 382
- NoCompress, 378
- OldTime, 377
- outfile, 376
- outtohide, 379
- PolyFun, 380
- PolyFunExp, 381
- PolyFunInv, 380
- PolyFunPow, 381
- PolyFunType, 381
- PolyFunVar, 381
- posWorkSize, 378
- pWorkSize, 378
- ShortSortCount, 382
- sLevel, 380
- SortType, 382
- Stage4Name, 380
- StoreData, 376
- TePos, 380
- wranfcall, 379
- wranfia, 377
- wranfnpair1, 379
- wranfnpair2, 379
- wranfseed, 378
- R_COPY_B
 - checkpoint.c, 545
- R_COPY_LIST
 - checkpoint.c, 546
- R_COPY_NAMETREE
 - checkpoint.c, 547
- R_COPY_S
 - checkpoint.c, 546
- R_FREE
 - checkpoint.c, 544
- R_FREE_NAMETREE
 - checkpoint.c, 545
- R_FREE_STREAM
 - checkpoint.c, 545
- R_SET
 - checkpoint.c, 545
- RaisPow
 - declare.h, 871
 - reken.c, 2589
- RaisPowCached
 - declare.h, 871
 - reken.c, 2589
- RaisPowMod
 - declare.h, 872
 - reken.c, 2590
- RANDOMFUNCTION
 - ftypes.h, 1415
- ranges
 - DICTIONARY, 83
- RANPERM
 - ftypes.h, 1415
- ratfun_add_mpoly
 - flintinterface.h, 1287
- ratfun_add_poly
 - flintinterface.h, 1287
- ratfun_normalize_mpoly
 - flintinterface.h, 1287
- ratfun_normalize_poly
 - flintinterface.h, 1287
- ratfun_read_mpoly
 - flintinterface.h, 1288
- ratfun_read_poly
 - flintinterface.h, 1288
- RATIO
 - ftypes.h, 1432
- ratio
 - Fraction, 141
- ratio.c, 2534, 2541
 - BinomGen, 2535
 - ConvertArgument, 2540
 - CreateExpression, 2538
 - DIVfunction, 2540
 - divrem, 2541
 - DoSumF1, 2536
 - DoSumF2, 2536
 - ExpandRat, 2540
 - FromPolyRatFun, 2539
 - GCDclean, 2539
 - GCDfunction, 2536
 - GCDfunction3, 2536
 - GCDterms, 2538
 - Glue, 2536
 - InvPoly, 2540
 - MergeDotproductLists, 2538
 - MergeSymbolLists, 2538
 - MULfunc, 2540
 - MultiplyWithTerm, 2537
 - PolyDiv, 2539
 - PutExtraSymbols, 2537
 - RatioFind, 2535
 - RatioGen, 2535
 - ReadPolyRatFun, 2538
 - TakeContent, 2537
 - TakeExtraSymbols, 2537
 - TakeSymbolContent, 2539
 - TheErrorMessage, 2541
- RatioFind
 - declare.h, 873
 - ratio.c, 2535
- RatioGen
 - declare.h, 873
 - ratio.c, 2535
- RATIONALMODE
 - ftypes.h, 1446
- RatToFloat
 - evaluate.c, 1158
 - float.c, 1306
- RatToFloatr
 - evaluate.c, 1158
- RatToLine

- declare.h, [873](#)
- sch.c, [2686](#)
- RBRACE
 - ftypes.h, [1396](#)
- rbufnum
 - M_const, [178](#)
- rbufs
 - ParallelVars, [324](#)
- RCYCLESYMMETRIC
 - ftypes.h, [1448](#)
- ReadFile
 - declare.h, [901](#)
 - tools.c, [3114](#)
- ReadFloat
 - float.c, [1306](#)
- ReadFromScratch
 - declare.h, [1030](#)
 - store.c, [2862](#)
- ReadFromStream
 - declare.h, [892](#)
 - tools.c, [3111](#)
- ReadijObject
 - declare.h, [991](#)
 - minos.c, [1762](#)
- ReadIndex
 - declare.h, [989](#)
 - minos.c, [1759](#)
- ReadIniInfo
 - declare.h, [990](#)
 - minos.c, [1760](#)
- ReadObject
 - declare.h, [991](#)
 - minos.c, [1762](#)
- ReadParticle
 - declare.h, [1033](#)
 - model.c, [1786](#)
- ReadPolyRatFun
 - declare.h, [1013](#)
 - ratio.c, [2538](#)
- readpos
 - SpecTatoR, [406](#)
- ReadPosFile
 - declare.h, [901](#)
 - tools.c, [3114](#)
- ReadRange
 - declare.h, [1007](#)
 - transform.c, [3181](#)
- ReadSaveExpression
 - declare.h, [999](#)
 - store.c, [2870](#)
- ReadSaveHeader
 - declare.h, [998](#)
 - store.c, [2867](#)
- ReadSaveIndex
 - declare.h, [998](#)
 - store.c, [2868](#)
- ReadSaveTerm32
 - declare.h, [1000](#)
- store.c, [2869](#)
- ReadSaveVariables
 - declare.h, [1001](#)
 - store.c, [2868](#)
- ReadSnum
 - declare.h, [874](#)
 - tools.c, [3119](#)
- READSPECTATORFLAG
 - ftypes.h, [1470](#)
- RecalcSetups
 - declare.h, [908](#)
 - setfile.c, [2724](#)
- RecFlag
 - T_const, [443](#)
- ReConvertParticle
 - diawrap.cc, [1068](#)
- RecoveryFilename
 - checkpoint.c, [548](#)
 - declare.h, [1003](#)
- recvBuffer
 - parallel.c, [2098](#)
- recycle_variables
 - optimize.cc, [2033](#)
- REDEFINEDEXPRESSION
 - ftypes.h, [1442](#)
- REDLENG
 - declare.h, [806](#)
- RedoTableTree
 - declare.h, [977](#)
 - tables.c, [2993](#)
- RedoTree
 - comtool.c, [774](#)
 - declare.h, [966](#)
- REDUCEMODE
 - ftypes.h, [1400](#)
- REDUCESUBEXPBUFFERS
 - compiler.c, [730](#)
- refineClass
 - MGraph, [210](#)
- REGULAR
 - ftypes.h, [1457](#)
- REGULAREXPRESSION
 - ftypes.h, [1441](#)
- REGULARSYMBOL
 - ftypes.h, [1465](#)
- reken.c, [2583](#), [2596](#)
 - AccumGCD, [2587](#)
 - AddLong, [2588](#)
 - AddPLon, [2588](#)
 - AddRat, [2586](#)
 - Bernoulli, [2595](#)
 - BigLong, [2588](#)
 - CompCoef, [2593](#)
 - COPYLONG, [2585](#)
 - DivLong, [2589](#)
 - DivRat, [2587](#)
 - Divvy, [2586](#)
 - Factorial, [2594](#)

- GcdLong, [2592](#)
- GCDMAX, [2585](#)
- GetBinom, [2592](#)
- GetLong, [2592](#)
- GetLongModInverses, [2591](#)
- GetModInverses, [2590](#)
- iniwranf, [2595](#)
- iranf, [2596](#)
- LcmLong, [2593](#)
- MakeInverses, [2590](#)
- MakeLongRational, [2593](#)
- MakeModTable, [2594](#)
- MakeRational, [2593](#)
- Modulus, [2594](#)
- Moebius, [2595](#)
- MulLong, [2588](#)
- Mully, [2586](#)
- MulRat, [2587](#)
- NEWTRICK, [2585](#)
- NextPrime, [2595](#)
- NormalModulus, [2590](#)
- Pack, [2586](#)
- PreRandom, [2596](#)
- Product, [2591](#)
- PrtLong, [2592](#)
- Quotient, [2591](#)
- RaisPow, [2589](#)
- RaisPowCached, [2589](#)
- RaisPowMod, [2590](#)
- Remain10, [2591](#)
- Remain4, [2592](#)
- Simplify, [2587](#)
- SubPLon, [2588](#)
- TakeLongRoot, [2593](#)
- TakeModulus, [2594](#)
- TakeNormalModulus, [2594](#)
- TakeRatRoot, [2587](#)
- UnPack, [2586](#)
- WARMUP, [2585](#)
- wranf, [2595](#)
- ReleaseTB
 - declare.h, [996](#)
 - tables.c, [2997](#)
- Remain10
 - declare.h, [874](#)
 - reken.c, [2591](#)
- Remain4
 - declare.h, [874](#)
 - reken.c, [2592](#)
- REMFUNCTION
 - ftypes.h, [1412](#)
- RemoveBridges
 - lus.c, [1717](#)
- RemoveDictionary
 - declare.h, [1026](#)
 - dict.c, [1086](#)
- RemoveDollars
 - declare.h, [988](#)
- names.c, [1866](#)
- renum
 - ExPrEsSiOn, [121](#)
- RENUMBER
 - structs.h, [2933](#)
- ReNuMbEr, [383](#)
 - func, [384](#)
 - funnum, [385](#)
 - indi, [384](#)
 - indnum, [385](#)
 - startposition, [384](#)
 - symp, [384](#)
 - symnum, [384](#)
 - vecnum, [385](#)
 - vect, [384](#)
- ReNumber
 - declare.h, [874](#)
 - reshuf.c, [2643](#)
- ReNUMBERVec
 - O_const, [284](#)
- renumlists
 - ExPrEsSiOn, [122](#)
- ReNumScratch
 - N_const, [253](#)
- ReOpenFile
 - declare.h, [900](#)
 - tools.c, [3113](#)
- reorder
 - MNodeClass, [224](#)
- reordLeg
 - Assign, [19](#)
- RepCount
 - T_const, [435](#)
- RepFunList
 - N_const, [249](#)
- RepFunNum
 - N_const, [259](#)
- replace
 - ExPrEsSiOn, [123](#)
- REPLACEARG
 - ftypes.h, [1462](#)
- ReplaceDollar
 - declare.h, [897](#)
 - names.c, [1864](#)
- REPLACELOOP
 - ftypes.h, [1456](#)
- REPLACEMENT
 - ftypes.h, [1408](#)
- ReplaceScrat
 - N_const, [252](#)
- RepLevel
 - C_const, [64](#)
- RepMax
 - M_const, [186](#)
- RepPoint
 - N_const, [249](#)
- RepSumCheck
 - C_const, [64](#)

- RepTop
 - T_const, [435](#)
- request
 - PF_BUFFER, [335](#)
- reserved
 - STOREHEADER, [420](#)
 - StreaM, [424](#)
 - TaBIEs, [467](#)
- ReserveTempFiles
 - declare.h, [926](#)
 - startup.c, [2832](#)
- ResetScratch
 - declare.h, [874](#)
 - store.c, [2862](#)
- resetTimeOnClear
 - M_const, [181](#)
- ResetVariables
 - declare.h, [929](#)
 - names.c, [1865](#)
- reshuf.c, [2642](#), [2647](#)
 - AdjustRenumScratch, [2643](#)
 - CountDo, [2644](#)
 - CountFun, [2644](#)
 - DetCurDum, [2643](#)
 - DimensionExpression, [2644](#)
 - DimensionSubterm, [2644](#)
 - DimensionTerm, [2644](#)
 - DoDelta3, [2645](#)
 - DoDistrib, [2645](#)
 - DoPartitions, [2645](#)
 - DoPermutations, [2646](#)
 - DoShuffle, [2646](#)
 - DoStuffle, [2646](#)
 - EqualArg, [2645](#)
 - FinishShuffle, [2646](#)
 - FinishStuffle, [2647](#)
 - FullRenum, [2643](#)
 - FunLevel, [2643](#)
 - MoveDummies, [2643](#)
 - MultDo, [2644](#)
 - NEWCODE, [2643](#)
 - ReNumber, [2643](#)
 - Shuffle, [2646](#)
 - Stuffle, [2646](#)
 - StuffRootAdd, [2647](#)
 - TestPartitions, [2645](#)
 - TryDo, [2645](#)
- ResizeData
 - O_const, [283](#)
- resizeFlag
 - O_const, [287](#)
- ResizeLONG
 - O_const, [283](#)
- ResizeNCWORD
 - O_const, [283](#)
- ResizePOINTER
 - O_const, [284](#)
- ResizePOS
 - O_const, [284](#)
- ResizeWORD
 - O_const, [283](#)
- ResolveSet
 - declare.h, [874](#)
 - wildcard.c, [3255](#)
- restore
 - AStack, [28](#)
- restoreCouple
 - Assign, [23](#)
- restoreMsg
 - AStack, [28](#)
- resultAGraph
 - SProcess, [411](#)
- resultMGraph
 - SProcess, [410](#)
- retstat
 - PF_BUFFER, [335](#)
- REVERSEARG
 - ftypes.h, [1462](#)
- REVERSEFILESTREAM
 - ftypes.h, [1382](#)
- REVERSEFUNCTION
 - ftypes.h, [1408](#)
- REVERSEORDER
 - ftypes.h, [1448](#)
- ReverseStatements
 - declare.h, [893](#)
 - tools.c, [3112](#)
- RevertScratch
 - declare.h, [875](#)
 - store.c, [2862](#)
- revision
 - STOREHEADER, [420](#)
- ReWorkT
 - declare.h, [844](#)
 - tables.c, [2996](#)
- right
 - NoDe, [276](#)
- rhs
 - CbUf, [72](#)
 - DICTIONARY_ELEMENT, [84](#)
- RHSIDE
 - ftypes.h, [1400](#)
- rhsInParallel
 - ParallelVars, [324](#)
- right
 - NaMeNode, [263](#)
 - tree, [484](#)
- RLONG
 - form3.h, [1350](#)
- rloser
 - NoDe, [276](#)
- RND
 - evaluate.c, [1157](#)
- ROOTFUNCTION
 - ftypes.h, [1411](#)
- rootnum

- CbUf, [74](#)
 - TaBIEs, [469](#)
- RPARENTHESIS
 - ftypes.h, [1396](#)
- rsrc
 - NoDe, [276](#)
- RSSize
 - N_const, [257](#)
- RunAddArg
 - declare.h, [1008](#)
 - transform.c, [3180](#)
- RunCycle
 - declare.h, [1008](#)
 - transform.c, [3179](#)
- RunDecode
 - declare.h, [1006](#)
 - transform.c, [3178](#)
- RunDedup
 - declare.h, [1009](#)
 - transform.c, [3179](#)
- RunDropArg
 - declare.h, [1009](#)
 - transform.c, [3180](#)
- RunEncode
 - declare.h, [1006](#)
 - transform.c, [3178](#)
- RunExplode
 - declare.h, [1007](#)
 - transform.c, [3179](#)
- RunHtoZArg
 - declare.h, [1009](#)
 - transform.c, [3181](#)
- RunImplode
 - declare.h, [1006](#)
 - transform.c, [3179](#)
- RunIsLyndon
 - declare.h, [1008](#)
 - transform.c, [3180](#)
- RunMulArg
 - declare.h, [1008](#)
 - transform.c, [3180](#)
- RunPermute
 - declare.h, [1007](#)
 - transform.c, [3179](#)
- RunReplace
 - declare.h, [1006](#)
 - transform.c, [3178](#)
- RunReverse
 - declare.h, [1008](#)
 - transform.c, [3179](#)
- RunSelectArg
 - declare.h, [1009](#)
 - transform.c, [3180](#)
- RunToLyndon
 - declare.h, [1008](#)
 - transform.c, [3180](#)
- RunTransform
 - declare.h, [1006](#)
 - transform.c, [3178](#)
- RunZtoHArg
 - declare.h, [1009](#)
 - transform.c, [3181](#)
- RWLOCKR
 - declare.h, [825](#)
- RWLOCKW
 - declare.h, [825](#)
- rwmode
 - dbase, [79](#)
- S
 - AllGlobals, [10](#)
- S0
 - M_const, [171](#)
 - T_const, [433](#)
- S_const, [386](#)
 - Balancing, [387](#)
 - CollectOverFlag, [388](#)
 - ExecMode, [387](#)
 - MaxExprSize, [386](#)
 - MultiThreaded, [387](#)
 - NumOldNumFactors, [387](#)
 - NumOldOnFile, [387](#)
 - OldNumFactors, [387](#)
 - OldOnFile, [386](#)
 - Olduflags, [387](#)
 - Oldvflags, [387](#)
- S_FLUSH_B
 - checkpoint.c, [546](#)
- s_one
 - FixedGlobals, [135](#)
- S_WRITE_B
 - checkpoint.c, [545](#)
- S_WRITE_DOLLAR
 - checkpoint.c, [547](#)
- S_WRITE_LIST
 - checkpoint.c, [546](#)
- S_WRITE_NAMETREE
 - checkpoint.c, [547](#)
- S_WRITE_S
 - checkpoint.c, [546](#)
- salter
 - OPTIMIZE, [297](#)
- saveCouple
 - Assign, [22](#)
- SaveData
 - O_const, [281](#)
- SaveHeader
 - O_const, [281](#)
- SAVEREVISION
 - store.c, [2861](#)
- sBer
 - T_const, [438](#)
- sbuf
 - ParallelVars, [323](#)
- sBuffer
 - sOrT, [399](#)
- sbufnum

- M_const, [178](#)
- SBYTE
 - form3.h, [1350](#)
- ScanFunctions
 - declare.h, [875](#)
 - function.c, [1490](#)
- sch.c, [2683](#), [2689](#)
 - AddArrayIndex, [2687](#)
 - AddToLine, [2685](#)
 - CodeToLine, [2686](#)
 - FinilLine, [2685](#)
 - IniLine, [2685](#)
 - LongToLine, [2686](#)
 - MultiplyToLine, [2686](#)
 - PrintTime, [2687](#)
 - PrtTerms, [2687](#)
 - RatToLine, [2686](#)
 - StrCopy, [2685](#)
 - TalToLine, [2686](#)
 - TokenToLine, [2686](#)
 - va_arg, [2685](#)
 - va_dcl, [2684](#)
 - va_end, [2684](#)
 - va_list, [2685](#)
 - va_start, [2684](#)
 - WriteAll, [2688](#)
 - WriteArgument, [2687](#)
 - WriteDictionary, [2687](#)
 - WriteExpression, [2688](#)
 - WriteInnerTerm, [2688](#)
 - WriteLists, [2687](#)
 - WriteOne, [2688](#)
 - WriteSubTerm, [2688](#)
 - WriteTerm, [2688](#)
 - WrtPower, [2687](#)
- schemeflags
 - OPTIMIZE, [297](#)
- schemenum
 - O_const, [287](#)
- ScratSize
 - M_const, [173](#)
- SEARCHINGPRECASE
 - ftypes.h, [1387](#)
- SEARCHINGPREENDSWITCH
 - ftypes.h, [1387](#)
- sec
 - Process, [373](#)
- sEdges
 - EGraph, [111](#)
- sedges
 - MConn, [201](#)
- SeekFile
 - declare.h, [902](#)
 - tools.c, [3114](#)
- SeekScratch
 - declare.h, [875](#)
 - store.c, [2861](#)
- SELECTARG
 - ftypes.h, [1463](#)
- selectExternalChannel
 - declare.h, [995](#)
 - extcmd.c, [1206](#)
- selectLeg
 - Assign, [18](#)
- selecttermundo
 - N_const, [252](#)
- selectVertex
 - Assign, [18](#)
- selectVertexSimp
 - Assign, [18](#)
- selfloop
 - MGraph, [216](#)
- selOPI
 - T_MGraph, [453](#)
- selUnAssLeg
 - Assign, [20](#)
- selUnAssVertex
 - Assign, [20](#)
- selUnAssVertexSimp
 - Assign, [20](#)
- SEPARATESYMBOL
 - ftypes.h, [1421](#)
- SEPARATOR
 - fwin.h, [1514](#)
 - unix.h, [3225](#)
- separators
 - C_const, [42](#)
- set_del
 - declare.h, [994](#)
 - tools.c, [3120](#)
- set_in
 - declare.h, [993](#)
 - tools.c, [3120](#)
- set_of_char
 - structs.h, [2935](#)
- set_set
 - declare.h, [993](#)
 - tools.c, [3120](#)
- set_sub
 - declare.h, [994](#)
 - tools.c, [3120](#)
- setAGraph
 - AStack, [27](#)
- SETBASELENGTH
 - declare.h, [817](#)
- SETBASEPOSITION
 - declare.h, [817](#)
- SETBIT
 - ftypes.h, [1454](#)
- SETBUFSIZE
 - setfile.c, [2724](#)
- setDefaultValues
 - Options, [301](#)
- SetDictionaryOptions
 - declare.h, [1026](#)
 - dict.c, [1086](#)

- SetDualOpts
 - diawrap.cc, 1069
- SetElementList
 - C_const, 44
- SetElements
 - variable.h, 3233
- setEMom
 - EEdge, 97
- SetEndHScratch
 - declare.h, 875
 - store.c, 2862
- setEndMG
 - Options, 303
- SetEndScratch
 - declare.h, 875
 - store.c, 2862
- setErExit
 - Options, 303
- SETERROR
 - declare.h, 816
- SETEXP
 - ftypes.h, 1405
- SetExpr
 - compcomm.c, 621
 - declare.h, 933
- SetExprCases
 - compcomm.c, 621
 - declare.h, 980
- setExtern
 - EGraph, 105
 - ENode, 116
 - T_EGraph, 448
- setexterntopo
 - T_const, 444
- setExtLoop
 - EGraph, 106
- SetfFloatPrecision
 - evaluate.c, 1159
- setfile.c, 2722, 2727
 - AllocFileHandle, 2725
 - AllocSetups, 2725
 - AllocSort, 2725
 - AllocSortFileName, 2725
 - commentchar, 2726
 - curdirp, 2726
 - cursortdirp, 2726
 - DeAllocFileHandle, 2725
 - DEFINEVALUE, 2724
 - DoSetups, 2724
 - dotchar, 2726
 - GetSetupPar, 2724
 - highfirst, 2727
 - lowfirst, 2727
 - MakeSetupAllocs, 2726
 - NUMERICALVALUE, 2723
 - ONOFFVALUE, 2724
 - PATHVALUE, 2723
 - procedureextension, 2727
 - ProcessOption, 2724
 - RecalcSetups, 2724
 - SETBUFSIZE, 2724
 - setupparameters, 2727
 - STRINGVALUE, 2723
 - TryEnvironment, 2726
 - TryFileSetups, 2726
 - WriteSetup, 2725
- SetFileIndex
 - declare.h, 875
 - store.c, 2865
- SetFloatPrecision
 - float.c, 1307
- SETFUNCTION
 - ftypes.h, 1407
- setId
 - EEdge, 97
 - ENode, 116
- setinterntopo
 - T_const, 444
- SETKILLMODEFOREXTERNALCHANNEL
 - declare.h, 827
- SetList
 - C_const, 44
- setLMom
 - EEdge, 97
- setmod
 - poly, 351
- SetMods
 - declare.h, 889
 - execute.c, 1171
- SETNUMBER
 - ftypes.h, 1435
- setOldDefaultValues
 - Options, 301
- SETONLY
 - ftypes.h, 1392
- setonoff
 - compcomm.c, 618
 - declare.h, 933
- setOutAG
 - Options, 303
- setOutgrf
 - Output, 310
- setOutgrp
 - Output, 310
- setOutMG
 - Options, 302
- setOutputF
 - Options, 302
- setOutputP
 - Options, 302
- SetPosFile
 - declare.h, 902
 - tools.c, 3115
- setQGrafOpt
 - Options, 301
- SeTs, 388

- dimension, 389
- first, 388
- flags, 389
- last, 389
- name, 388
- namesize, 389
- node, 389
- type, 388
- Sets
 - variable.h, 3233
- SetScratch
 - declare.h, 890
 - store.c, 2862
- SETSET
 - ftypes.h, 1405
- SetSpecialMode
 - declare.h, 924
 - module.c, 1793
- SETSTARTPOS
 - declare.h, 819
- SETTERMINATORFOREXTERNALCHANNEL
 - declare.h, 827
- SETTONUM
 - ftypes.h, 1434
- setType
 - EEdge, 97
 - ENode, 117
- SetupDir
 - M_const, 172
- SETUPFILE
 - ftypes.h, 1383
- SetupFile
 - M_const, 172
- setupfilename
 - inivar.h, 1711
 - variable.h, 3240
- SetupFlag
 - C_const, 58
- SetupMPFTables
 - float.c, 1307
- SetupMZVTables
 - float.c, 1307
- SETUPPARAMETERS, 389
 - flags, 390
 - parameter, 390
 - type, 390
 - value, 390
- setupparameters
 - setfile.c, 2727
- setValue
 - Fraction, 139
 - Options, 301
- sfact
 - T_const, 438
- SFHSIZE
 - fsizes.h, 1362
- sFill
 - sOrT, 400
- Sflush
 - declare.h, 876
 - sort.c, 2753
- sFun
 - STOREHEADER, 419
- SGN
 - declare.h, 806
- sgn
 - TrAcEn, 477
 - TrAcEs, 481
- SGroup, 391
 - ~SGroup, 391
 - addGroup, 392
 - cgen, 394
 - clearGroup, 392
 - csav, 394
 - delGroup, 392
 - eclass, 393
 - elem, 393
 - genNext, 392
 - neclass, 393
 - nElem, 392
 - nelem, 393
 - newGroup, 392
 - nextElem, 393
 - nnodes, 393
 - permg, 394
 - perms, 394
 - pgq, 394
 - pgr, 394
 - print, 392
 - psq, 394
 - psr, 394
 - SGroup, 391
 - size, 393
- sHalf
 - sOrT, 400
- SHcombi
 - N_const, 254
- SHcombisize
 - N_const, 255
- SHELL
 - pre.c, 2348
- shellname
 - X_const, 492
- SHMWINSIZE
 - fsizes.h, 1363
- shmWinSize
 - M_const, 175
- ShortSortCount
 - R_const, 382
- ShortStats
 - C_const, 54
- ShortStatsMax
 - C_const, 64
- ShrinkDictionary
 - declare.h, 1027
 - dict.c, 1086

- Shuffle
 - declare.h, [842](#)
 - reshuf.c, [2646](#)
- SHvar
 - N_const, [254](#)
- SHvariables, [395](#)
 - combilast, [396](#)
 - do_uffle, [396](#)
 - finishuf, [396](#)
 - incoef, [395](#)
 - level, [397](#)
 - nincoef, [396](#)
 - option, [397](#)
 - outfun, [395](#)
 - outterm, [395](#)
 - stop1, [396](#)
 - stop2, [396](#)
 - ststop1, [396](#)
 - ststop2, [396](#)
 - thefunction, [397](#)
- sld
 - EGraph, [110](#)
- SIGALRM
 - portsignals.h, [2343](#)
- SIGEMT
 - portsignals.h, [2342](#)
- SIGFPE
 - portsignals.h, [2341](#)
- SIGFUNCTION
 - ftypes.h, [1410](#)
- SIGHUP
 - portsignals.h, [2343](#)
- SIGILL
 - portsignals.h, [2342](#)
- SIGINT
 - portsignals.h, [2343](#)
- SIGLOST
 - portsignals.h, [2342](#)
- SIGMA
 - ftypes.h, [1472](#)
- sign
 - DiStRiBuTe, [85](#)
 - node, [274](#)
 - OptQGRef, [309](#)
 - PeRmUtE, [332](#)
 - PeRmUtEp, [333](#)
 - poly, [350](#)
- sign1
 - TrAcEs, [482](#)
- sign2
 - TrAcEs, [482](#)
- SignCheck
 - N_const, [261](#)
- SIGNFUN
 - ftypes.h, [1409](#)
- SIGPIPE
 - portsignals.h, [2342](#)
- SIGPROF
 - portsignals.h, [2343](#)
- SIGQUIT
 - portsignals.h, [2343](#)
- SIGSEGV
 - portsignals.h, [2341](#)
- SIGSYS
 - portsignals.h, [2342](#)
- SIGTERM
 - portsignals.h, [2342](#)
- SIGVTALRM
 - portsignals.h, [2343](#)
- SIGXCPU
 - portsignals.h, [2342](#)
- SIGXFSZ
 - portsignals.h, [2342](#)
- silent
 - M_const, [187](#)
- simp1token
 - declare.h, [963](#)
 - token.c, [3080](#)
- simp2token
 - declare.h, [963](#)
 - token.c, [3081](#)
- simp3atoken
 - declare.h, [963](#)
 - token.c, [3081](#)
- simp3btoken
 - declare.h, [964](#)
 - token.c, [3081](#)
- simp4token
 - declare.h, [964](#)
 - token.c, [3081](#)
- simp5token
 - declare.h, [964](#)
 - token.c, [3081](#)
- simp6token
 - declare.h, [964](#)
 - token.c, [3081](#)
- SIMPLE
 - ftypes.h, [1473](#)
- simple_poly
 - poly, [351](#), [352](#)
- SimpleDelta
 - float.c, [1303](#)
- SimpleDeltaC
 - float.c, [1303](#)
- SimpleSplitMerge
 - declare.h, [979](#)
 - sort.c, [2763](#)
- SimpleSplitMergeRec
 - declare.h, [979](#)
 - sort.c, [2763](#)
- Simplify
 - declare.h, [876](#)
 - reken.c, [2587](#)
- simplify_fmpz
 - flintinterface.h, [1289](#)
- simplify_fmpz_poly

- flintinterface.h, [1289](#)
- simpwtoken
 - declare.h, [963](#)
 - token.c, [3080](#)
- simulated_annealing
 - optimize.cc, [2029](#)
- sInd
 - STOREHEADER, [419](#)
- SINFUNCTION
 - ftypes.h, [1413](#)
- SingleTable
 - float.c, [1303](#)
- SINHFUNCTION
 - ftypes.h, [1414](#)
- SIOsize
 - M_const, [174](#)
- size
 - ARGBUFFER, [14](#)
 - DICTIONARY_ELEMENT, [84](#)
 - DoLIaRS, [88](#)
 - ExPrEsSiOn, [121](#)
 - FaCdOILaR, [125](#)
 - InDeXeNtRy, [154](#)
 - INSIDEINFO, [157](#)
 - LIST, [165](#)
 - MiNmAx, [218](#)
 - objects, [290](#)
 - PRELOAD, [364](#)
 - SGroup, [393](#)
 - TaBIeBaEsUbInDeX, [464](#)
- size_of_form_notation
 - poly, [353](#)
- size_of_form_notation_with_den
 - poly, [353](#)
- size_of_terms
 - poly, [361](#)
- SizeCommutelnSet
 - C_const, [63](#)
- sizecouplings
 - MoDeL, [236](#)
- SizeDictionaries
 - O_const, [286](#)
- sizeelements
 - DICTIONARY, [82](#)
- SIZEFACS
 - fsizes.h, [1359](#)
- SizeForSpectatorFiles
 - M_const, [183](#)
- SizeInFile
 - sOrT, [399](#)
- SizeOfDollar
 - declare.h, [983](#)
 - dollar.c, [1105](#)
- SizeOfExpression
 - declare.h, [983](#)
 - execute.c, [1173](#)
- SIZEOFFUNCTION
 - ftypes.h, [1418](#)
- sizeprimelist
 - T_const, [444](#)
- sizeprototype
 - ExPrEsSiOn, [124](#)
- sizeselecttermundo
 - N_const, [260](#)
- SIZESTORECACHE
 - fsizes.h, [1364](#)
- SizeStoreCache
 - M_const, [174](#)
- sizevertices
 - MoDeL, [236](#)
- SKIP
 - ftypes.h, [1437](#)
- SkipAName
 - compiler.c, [731](#)
 - declare.h, [964](#)
- SKIPBLANKS
 - declare.h, [810](#)
- SKIPBRA1
 - declare.h, [811](#)
- SKIPBRA2
 - declare.h, [811](#)
- SKIPBRA3
 - declare.h, [811](#)
- SKIPBRA4
 - declare.h, [811](#)
- SKIPBRA5
 - declare.h, [811](#)
- SKIPBUFSIZE
 - pre.c, [2348](#)
- SkipClears
 - M_const, [178](#)
- SkipField
 - declare.h, [906](#)
 - tools.c, [3119](#)
- SKIPGEXPRESSION
 - ftypes.h, [1438](#)
- SKIPLEXPRESSION
 - ftypes.h, [1438](#)
- SkipName
 - declare.h, [1032](#)
 - pre.c, [2365](#)
- SKIPUNHIDEGEXPRESSION
 - ftypes.h, [1440](#)
- SKIPUNHIDELEXPRESSION
 - ftypes.h, [1440](#)
- SLARGEBUFFER
 - fsizes.h, [1361](#)
- SLargeSize
 - M_const, [174](#)
- slavebuf
 - ParallelVars, [323](#)
- sLevel
 - R_const, [380](#)
- slist
 - Interaction, [160](#)
- sLoops

- EGraph, 112
- small_power
 - T_const, 435
- small_power_maxn
 - T_const, 441
- small_power_maxx
 - T_const, 441
- small_power_n
 - T_const, 435
- SmallEsize
 - sOrT, 402
- SmallSize
 - sOrT, 402
- smart.c, 2742, 2743
 - MatchIsPossible, 2742
 - StudyPattern, 2742
- sMaxdeg
 - EGraph, 111
- SMAFXPATCHES
 - fsizes.h, 1361
- SMaxFpatches
 - M_const, 177
- SMAXPATCHES
 - fsizes.h, 1361
- SMaxPatches
 - M_const, 177
- SNAIL
 - ftypes.h, 1473
- sNodes
 - EGraph, 111
- snodes
 - MConn, 201
- SNUMBER
 - ftypes.h, 1406
- sopi
 - ToPoTyPe, 475
- SORT
 - ftypes.h, 1453
- sOrT, 397
 - cBuffer, 400
 - cBufferSize, 404
 - f, 402
 - ff, 402
 - file, 399
 - fPatches, 401
 - fPatchesStop, 401
 - fPatchN, 405
 - fPatchN1, 404
 - GenSpace, 403
 - GenTerms, 403
 - inNum, 405
 - inPatches, 401
 - iPatches, 402
 - ktoi, 401
 - LargeSize, 402
 - IBuffer, 399
 - IFill, 399
 - IPatch, 404
- ITop, 399
- MaxFpatches, 404
- MaxPatches, 403
- maxtermsize, 404
- newmaxtermsize, 405
- ninterms, 403
- outputmode, 405
- Patches, 400
- poin2a, 401
- poina, 401
- PoinFill, 400
- PolyFlag, 404
- PolyWise, 404
- pStop, 401
- putinsize, 403
- sBuffer, 399
- sFill, 400
- sHalf, 400
- SizeInFile, 399
- SmallEsize, 402
- SmallSize, 402
- SpaceLeft, 403
- sPointer, 400
- stage4, 405
- stagelevel, 405
- sTerms, 402
- sTop, 400
- sTop2, 400
- Terms2InSmall, 403
- TermsInSmall, 402
- TermsLeft, 403
- tree, 401
- type, 404
- used, 399
- sort.c, 2748, 2764
 - AddArgs, 2756
 - AddCoef, 2754
 - AddPoly, 2755
 - BinarySearch, 2763
 - CleanUpSort, 2763
 - Compare1, 2757
 - CompareHSymbols, 2758
 - CompareSymbols, 2757
 - ComPress, 2758
 - EndSort, 2751
 - FlushOut, 2754
 - GarbHand, 2759
 - humanBytesSuffix, 2764
 - HumanString, 2750
 - HUMANSTRLN, 2749
 - HUMANSUFFLEN, 2749
 - humanTermsSuffix, 2764
 - INSLNGTH, 2749
 - LowerSortLevel, 2763
 - MergePatches, 2760
 - NewSort, 2751
 - NEWSPLITMERGE, 2749
 - NEWSPLITMERGETIMSORT, 2749

- PolyRatFunSpecial, [2763](#)
- PutIn, [2752](#)
- PutOut, [2753](#)
- Sflush, [2753](#)
- SimpleSplitMerge, [2763](#)
- SimpleSplitMergeRec, [2763](#)
- SortWild, [2762](#)
- SplitMerge, [2759](#)
- StageSort, [2762](#)
- StoreTerm, [2761](#)
- toterm, [2764](#)
- WriteStats, [2750](#)
- SORTANTIPOWER
 - ftypes.h, [1403](#)
- SORTHIGHFIRST
 - ftypes.h, [1403](#)
- SORTING
 - structs.h, [2937](#)
- SORTIOSIZE
 - fsizes.h, [1361](#)
- SORTLOWFIRST
 - ftypes.h, [1403](#)
- SORTMODULE
 - ftypes.h, [1383](#)
- SORTPOWERFIRST
 - ftypes.h, [1403](#)
- SortReallocateFlag
 - C_const, [62](#)
- SortTheList
 - declare.h, [969](#)
 - lus.c, [1716](#)
- SortType
 - BrAcKeTiNfO, [36](#)
 - C_const, [58](#)
 - R_const, [382](#)
- SortWeights
 - argument.c, [500](#)
 - declare.h, [937](#)
- SortWild
 - declare.h, [876](#)
 - sort.c, [2762](#)
- SoScratC
 - N_const, [253](#)
- SpaceLeft
 - sOrT, [403](#)
- sparse
 - OPTIMIZE, [297](#)
 - TaBIes, [467](#)
 - VeRtEx, [491](#)
- spare1
 - objects, [290](#)
- spare2
 - objects, [290](#)
- spare3
 - objects, [291](#)
- SpareTable
 - declare.h, [890](#)
 - tables.c, [2994](#)
- sparse
 - TaBIes, [468](#)
- SPARSETABLE
 - ftypes.h, [1471](#)
- spec
 - FuNcTiOn, [145](#)
- SpecialCleanup
 - declare.h, [889](#)
 - execute.c, [1171](#)
- SPECIFICATION
 - ftypes.h, [1390](#)
- SPECMASK
 - form3.h, [1345](#)
- SpecTatoR, [406](#)
 - exprnumber, [407](#)
 - fh, [406](#)
 - flags, [407](#)
 - name, [407](#)
 - position, [406](#)
 - readpos, [406](#)
- spectator.c, [2820](#), [2822](#)
 - ClearSpectators, [2821](#)
 - CoCopySpectator, [2821](#)
 - CoCreateSpectator, [2820](#)
 - CoEmptySpectator, [2821](#)
 - CoRemoveSpectator, [2821](#)
 - CoToSpectator, [2820](#)
 - FlushSpectators, [2821](#)
 - GetFromSpectator, [2821](#)
 - PutInSpectator, [2821](#)
- SPECTATOREXPRESSION
 - ftypes.h, [1440](#)
- SpectatorFiles
 - M_const, [173](#)
- SPECTATORSIZE
 - fsizes.h, [1362](#)
- SpectatorSize
 - M_const, [176](#)
- spin
 - PaRtlcLe, [331](#)
- SplitMerge
 - declare.h, [877](#)
 - sort.c, [2759](#)
- SplitScratch
 - N_const, [253](#)
- SplitScratch1
 - N_const, [253](#)
- SplitScratchSize
 - N_const, [255](#)
- SplitScratchSize1
 - N_const, [255](#)
- sPointer
 - sOrT, [400](#)
- sproc
 - Assign, [24](#)
 - EGraph, [109](#)
 - Options, [305](#)
 - Output, [313](#)

- PNodeClass, 341
- Process, 372
- SProcess, 407
 - ~SProcess, 409
 - agraph, 412
 - agrcount, 414
 - assign, 410
 - astack, 411
 - cl2nd, 412
 - clist, 413
 - DUMMYPADDING, 414
 - egraph, 412
 - endAGraph, 410
 - endMGraph, 410
 - extperm, 414
 - generate, 409
 - id, 413
 - loop, 413
 - match, 410
 - mgraph, 412
 - mgrcount, 414
 - model, 411
 - nAGraphs, 415
 - nAOPI, 415
 - nclass, 412
 - ncouple, 413
 - nd2cl, 412
 - nEdges, 413
 - nExtern, 413
 - nfinal, 412
 - ninitl, 412
 - nMGraphs, 414
 - nMOPI, 414
 - nNodes, 413
 - nvert, 413
 - opt, 411
 - pnclass, 411
 - proc, 411
 - prSProcess, 409
 - resultAGraph, 411
 - resultMGraph, 410
 - SProcess, 409
 - tCouple, 414
 - toMNodeClass, 410
 - wAGraphs, 415
 - wAOPI, 415
 - wMGraphs, 414
 - wMOPI, 415
- sptbl
 - Process, 372
- SQRTFUNCTION
 - ftypes.h, 1413
- SS
 - T_const, 433
- SSMALLBUFFER
 - fsizes.h, 1361
- SSmallEsize
 - M_const, 174
- SSMALLOCOVERFLOW
 - fsizes.h, 1361
- SSmallSize
 - M_const, 174
- SSORTIOSIZE
 - fsizes.h, 1362
- sSym
 - STOREHEADER, 419
- st
 - NCand, 270
 - NStack, 279
- stage4
 - sOrT, 405
- Stage4Name
 - R_const, 380
- stagelevel
 - sOrT, 405
- StageSort
 - declare.h, 928
 - sort.c, 2762
- stap
 - TrAcEs, 481
- start
 - BrAcKeTiNdEx, 32
 - VaRrEnUm, 488
- StartFiles
 - declare.h, 904
 - tools.c, 3112
- startlinenumber
 - DoLoOp, 91
- StartLoops
 - declare.h, 1035
 - lus.c, 1716
- StartMore
 - startup.c, 2833
- startposition
 - ReNuMbEr, 384
- StartPrepro
 - declare.h, 917
 - pre.c, 2360
- startup.c, 2830, 2835
 - CleanUp, 2833
 - DEFAULTFNAMELENGTH, 2832
 - defaulttempfilename, 2835
 - DoTail, 2832
 - emptystring, 2835
 - FORMNAME, 2831
 - GetRunningTime, 2834
 - IniVars, 2833
 - main, 2833
 - OpenInput, 2832
 - PrintDeprecation, 2834
 - PrintRunningTime, 2834
 - ReserveTempFiles, 2832
 - StartMore, 2833
 - StartVariables, 2832
 - STRINGIFY, 2831
 - STRINGIFY__, 2831

- TAKEPATH, [2832](#)
- TerminatImpl, [2834](#)
- VERSIONSTR, [2832](#)
- VERSIONSTR__, [2831](#)
- StartVariables
 - declare.h, [828](#)
 - startup.c, [2832](#)
- STATEMENT
 - ftypes.h, [1390](#)
- STATIC_ASSERT
 - form3.h, [1344](#)
- STATIC_ASSERT__1
 - form3.h, [1344](#)
- STATIC_ASSERT__2
 - form3.h, [1344](#)
- STATIC_ASSERT__3
 - form3.h, [1344](#)
- StatsFlag
 - C_const, [57](#)
- STATSMERGETOFILE
 - ftypes.h, [1403](#)
- STATSOUT
 - ftypes.h, [1388](#)
- STATSPOSTSORT
 - ftypes.h, [1403](#)
- STATSSPLITMERGE
 - ftypes.h, [1403](#)
- status
 - ExPrEsSiOn, [123](#)
 - PF_BUFFER, [335](#)
- STDERR
 - pre.c, [2348](#)
- stderrname
 - X_const, [492](#)
- StdOut
 - M_const, [177](#)
- step1
 - TrAcEs, [481](#)
- STEP2
 - dollar.c, [1102](#)
- sTerms
 - sOrT, [402](#)
- STermsInSmall
 - M_const, [174](#)
- STERMSSMALL
 - fsizes.h, [1361](#)
- sTop
 - sOrT, [400](#)
- stop
 - PF_BUFFER, [335](#)
- stop1
 - SHvariables, [396](#)
- sTop2
 - sOrT, [400](#)
- stop2
 - SHvariables, [396](#)
- StopWatchZero
 - P_const, [318](#)
- STORE
 - ftypes.h, [1454](#)
- store.c, [2860](#), [2871](#)
 - AddToScratch, [2863](#)
 - CoLoad, [2863](#)
 - CopyExpression, [2867](#)
 - CoSave, [2863](#)
 - DeleteStore, [2863](#)
 - DetVars, [2864](#)
 - FindInIndex, [2866](#)
 - FindrNumber, [2866](#)
 - GetFromStore, [2864](#)
 - GetMoreFromMem, [2864](#)
 - GetMoreTerms, [2864](#)
 - GetOneTerm, [2864](#)
 - GetTable, [2866](#)
 - GetTerm, [2863](#)
 - NextFileIndex, [2865](#)
 - OpenTemp, [2861](#)
 - PutInStore, [2863](#)
 - ReadFromScratch, [2862](#)
 - ReadSaveExpression, [2870](#)
 - ReadSaveHeader, [2867](#)
 - ReadSaveIndex, [2868](#)
 - ReadSaveTerm32, [2869](#)
 - ReadSaveVariables, [2868](#)
 - ResetScratch, [2862](#)
 - RevertScratch, [2862](#)
 - SAVEREVISION, [2861](#)
 - SeekScratch, [2861](#)
 - SetEndHScratch, [2862](#)
 - SetEndScratch, [2862](#)
 - SetFileIndex, [2865](#)
 - SetScratch, [2862](#)
 - TermRenummer, [2865](#)
 - ToStorage, [2864](#)
 - VarStore, [2865](#)
 - WriteStoreHeader, [2867](#)
- STORECACHE
 - structs.h, [2936](#)
- StOrEcAcHe, [416](#)
 - buffer, [417](#)
 - next, [416](#)
 - position, [416](#)
 - toppos, [416](#)
- StoreCache
 - T_const, [434](#)
- StoreCacheAlloc
 - T_const, [434](#)
- StoreData
 - R_const, [376](#)
- STOREEXPRESSION
 - ftypes.h, [1438](#)
- StoreFileSize
 - C_const, [42](#)
- StoreHandle
 - C_const, [68](#)
- STOREHEADER, [417](#)

- endianness, [418](#)
- headermark, [418](#)
- lenLONG, [418](#)
- lenPOINTER, [418](#)
- lenPOS, [418](#)
- lenWORD, [418](#)
- maxpower, [419](#)
- reserved, [420](#)
- revision, [420](#)
- sFun, [419](#)
- sInd, [419](#)
- sSym, [419](#)
- sVec, [419](#)
- wildoffset, [420](#)
- STOREMODULE
 - ftypes.h, [1384](#)
- StoreTerm
 - declare.h, [878](#)
 - sort.c, [2761](#)
- str_dup
 - declare.h, [989](#)
 - minos.c, [1758](#)
- StrCmp
 - declare.h, [906](#)
 - tools.c, [3116](#)
- StrCopy
 - declare.h, [830](#)
 - sch.c, [2685](#)
- strDup1
 - declare.h, [890](#)
 - tools.c, [3118](#)
- STREAM
 - structs.h, [2934](#)
- StreaM, [420](#)
 - afterwards, [424](#)
 - buffer, [422](#)
 - bufferposition, [423](#)
 - bufferize, [423](#)
 - eqnum, [424](#)
 - fileposition, [421](#)
 - FoldName, [422](#)
 - handle, [423](#)
 - inbuffer, [423](#)
 - isnextchar, [424](#)
 - linenumber, [421](#)
 - name, [422](#)
 - nextchar, [424](#)
 - olddelay, [424](#)
 - oldnoshowinput, [424](#)
 - pname, [422](#)
 - pointer, [422](#)
 - prevars, [423](#)
 - previous, [423](#)
 - previousNoShowInput, [424](#)
 - prevline, [421](#)
 - reserved, [424](#)
 - top, [422](#)
 - type, [423](#)
- Streams
 - C_const, [46](#)
- StrHICmp
 - declare.h, [907](#)
 - tools.c, [3117](#)
- StrICmp
 - declare.h, [906](#)
 - tools.c, [3116](#)
- StrICont
 - declare.h, [907](#)
 - tools.c, [3117](#)
- strict
 - TaBIEs, [468](#)
- StrictRounding
 - float.c, [1308](#)
- STRINGIFY
 - pre.c, [2348](#)
 - startup.c, [2831](#)
- STRINGIFY__
 - pre.c, [2348](#)
 - startup.c, [2831](#)
- STRINGVALUE
 - setfile.c, [2723](#)
- StrLen
 - declare.h, [907](#)
 - tools.c, [3117](#)
- structs.h, [2929](#), [2938](#)
 - ALLGLOBALS, [2937](#)
 - BHEAD, [2932](#)
 - BHEAD0, [2933](#)
 - CBUF, [2936](#)
 - CHANNEL, [2936](#)
 - COMPARE, [2938](#)
 - COMPAREDUMMY, [2936](#)
 - COMPTREE, [2934](#)
 - DISTRIBUTE, [2937](#)
 - DO_UFFLE, [2936](#)
 - DOLOOP, [2935](#)
 - EMPTYININDEX, [2932](#)
 - FILEHANDLE, [2934](#)
 - FILEINDEX, [2933](#)
 - FINISHUFFLE, [2936](#)
 - FIXEDGLOBALS, [2938](#)
 - FUNCTIONS, [2934](#)
 - INDEXENTRY, [2933](#)
 - INFILEINDEX, [2932](#)
 - NAMENODE, [2933](#)
 - NAMETREE, [2934](#)
 - NESTING, [2936](#)
 - one_byte, [2935](#)
 - PARTI, [2937](#)
 - PERM, [2937](#)
 - PERMP, [2937](#)
 - PHEAD, [2932](#)
 - PHEAD0, [2932](#)
 - PREVAR, [2935](#)
 - RENUMBER, [2933](#)
 - set_of_char, [2935](#)

- SORTING, [2937](#)
- STORECACHE, [2936](#)
- STREAM, [2934](#)
- TABLES, [2934](#)
- TRACEN, [2935](#)
- TRACES, [2935](#)
- VARRENUM, [2933](#)
- WCN, [2937](#)
- WCN2, [2938](#)
- ststop1
 - SHvariables, [396](#)
- ststop2
 - SHvariables, [396](#)
- StudyPattern
 - declare.h, [970](#)
 - smart.c, [2742](#)
- StuffAdd
 - declare.h, [807](#)
- Stuffle
 - declare.h, [843](#)
 - reshuf.c, [2646](#)
- StuffRootAdd
 - declare.h, [843](#)
 - reshuf.c, [2647](#)
- sub
 - Fraction, [140](#)
 - poly, [355](#)
- SUBAFTER
 - ftypes.h, [1450](#)
- SUBAFTERNOT
 - ftypes.h, [1450](#)
- SUBALL
 - ftypes.h, [1449](#)
- SuBbUf, [425](#)
 - buffernum, [425](#)
 - subexpnum, [425](#)
- subCouple
 - Assign, [23](#)
- SUBDISORDER
 - ftypes.h, [1450](#)
- subexpbuffers
 - compiler.c, [733](#)
- subexpnum
 - SuBbUf, [425](#)
- SUBEXPR
 - ftypes.h, [1451](#)
- SUBEXPRESSION
 - ftypes.h, [1404](#)
- SUBEXPSIZE
 - ftypes.h, [1437](#)
- subindex
 - TaBIeBAsE, [463](#)
- SUBMANY
 - ftypes.h, [1449](#)
- SUBMASK
 - ftypes.h, [1449](#)
- SUBMULTI
 - ftypes.h, [1449](#)
- SUBONCE
 - ftypes.h, [1449](#)
- SUBONLY
 - ftypes.h, [1449](#)
- SubPLon
 - declare.h, [879](#)
 - reken.c, [2588](#)
- SUBROUTINEFILE
 - ftypes.h, [1383](#)
- SUBSELECT
 - ftypes.h, [1449](#)
- SubsInAll
 - declare.h, [980](#)
 - pattern.c, [2205](#)
- SUBSORT
 - ftypes.h, [1446](#)
- Substitute
 - declare.h, [879](#)
 - pattern.c, [2205](#)
- subsubveto
 - N_const, [258](#)
- SUBTERMUSED1
 - ftypes.h, [1436](#)
- SUBTERMUSED2
 - ftypes.h, [1436](#)
- SUBVECTOR
 - ftypes.h, [1449](#)
- sum_results
 - tree_node, [486](#)
- SUMF1
 - ftypes.h, [1407](#)
- SUMF2
 - ftypes.h, [1407](#)
- SUMMEDIND
 - ftypes.h, [1445](#)
- sumnum
 - M_const, [188](#)
- SUMNUM1
 - ftypes.h, [1432](#)
- SUMNUM2
 - ftypes.h, [1432](#)
- sumpnum
 - M_const, [188](#)
- SumTime
 - M_const, [176](#)
- sVec
 - STOREHEADER, [419](#)
- SWAP
 - parallel.c, [2095](#)
- SWITCH, [426](#)
 - caseoffset, [427](#)
 - defaultcase, [426](#)
 - endswitch, [427](#)
 - iflevel, [427](#)
 - maxcase, [427](#)
 - mincase, [427](#)
 - nestingsum, [428](#)
 - numcases, [427](#)

- padding, 428
- table, 426
- tablesize, 427
- typetable, 427
- whilelevel, 428
- SwitchArray
 - C_const, 47
- SwitchHeap
 - C_const, 47
- SwitchInArray
 - C_const, 68
- SwitchLevel
 - C_const, 67
- SwitchSplitMerge
 - declare.h, 1031
 - if.c, 1685
- SwitchSplitMergeRec
 - declare.h, 1031
 - if.c, 1685
- SWITCHTABLE, 428
 - compbuffer, 429
 - ncase, 428
 - value, 428
- swmes
 - FixedGlobals, 135
- symb
 - ReNuMbEr, 384
- SYMBOL
 - ftypes.h, 1404
- SyMbOl, 429
 - complex, 430
 - dimension, 430
 - flags, 430
 - maxpower, 429
 - minpower, 429
 - name, 429
 - namesize, 430
 - node, 430
 - number, 430
- SYMBOL_
 - ftypes.h, 1443
- SymbolList
 - C_const, 44
- SymbolNormalize
 - declare.h, 996
 - normal.c, 1907
- SYMBOLONLY
 - ftypes.h, 1391
- Symbols
 - C_const, 46
- symbols
 - variable.h, 3233
- SymChangeFlag
 - C_const, 69
- SymFind
 - declare.h, 879
 - function.c, 1490
- SymGen
 - declare.h, 879
 - function.c, 1489
- symmet
 - FUN_INFO, 142
- symmetr.c, 2963, 2965
 - Distribute, 2964
 - FunMatchCy, 2964
 - FunMatchSy, 2964
 - MatchArgument, 2964
 - MatchCy, 2964
 - MatchE, 2963
 - Permute, 2963
 - PermuteP, 2963
- SYMMETRIC
 - ftypes.h, 1448
- symmetric
 - FuNcTiOn, 145
- SYMMETRIZE
 - ftypes.h, 1432
- Symmetrize
 - declare.h, 880
 - function.c, 1489
- symminfo
 - FuNcTiOn, 144
- symnum
 - ReNuMbEr, 384
- SYMTONUM
 - ftypes.h, 1433
- SYMTOSUB
 - ftypes.h, 1433
- SYMTOSYM
 - ftypes.h, 1433
- SynchFile
 - declare.h, 902
 - tools.c, 3115
- T
 - AllGlobals, 11
- T_const, 431
 - aebufnum, 439
 - allbufnum, 439
 - bernoullis, 435
 - BrackBuf, 434
 - bracketindexflag, 440
 - bracketinfo, 437
 - CacheNumberMemHeap, 437
 - CacheNumberMemMax, 440
 - CacheNumberMemTop, 440
 - comfun, 442
 - comind, 442
 - comnum, 442
 - comsym, 441
 - dummysubexp, 441
 - ebufnum, 438
 - factorials, 435
 - fbufnum, 439
 - fromindex, 444
 - FunArg, 442
 - idallflag, 439

- idallmaxnum, [439](#)
- idallnum, [439](#)
- InNumMem, [438](#)
- inprimelist, [444](#)
- LeaveNegative, [441](#)
- ListPoly, [437](#)
- ListSymbols, [437](#)
- ListSymbolsSize, [440](#)
- locwildvalue, [442](#)
- IWorkPointer, [438](#)
- IWorkSpace, [434](#)
- mBer, [443](#)
- mfac, [438](#)
- MinVecArg, [442](#)
- mulpat, [442](#)
- nBer, [443](#)
- Nest, [433](#)
- NestPoin, [433](#)
- NestStop, [433](#)
- nfac, [443](#)
- NumberMemHeap, [436](#)
- NumberMemMax, [440](#)
- NumberMemTop, [440](#)
- NumListSymbols, [441](#)
- NumMem, [437](#)
- numpoly, [441](#)
- optentimes, [440](#)
- partitions, [437](#)
- pBer, [436](#)
- pfac, [436](#)
- PolyAct, [443](#)
- posWorkPointer, [438](#)
- posWorkSpace, [434](#)
- previousEfactor, [436](#)
- primelist, [436](#)
- proexp, [442](#)
- pWorkPointer, [438](#)
- pWorkSpace, [434](#)
- RecFlag, [443](#)
- RepCount, [435](#)
- RepTop, [435](#)
- S0, [433](#)
- sBer, [438](#)
- setexterntopo, [444](#)
- setinterntopo, [444](#)
- sfact, [438](#)
- sizeprimelist, [444](#)
- small_power, [435](#)
- small_power_maxn, [441](#)
- small_power_maxx, [441](#)
- small_power_n, [435](#)
- SS, [433](#)
- StoreCache, [434](#)
- StoreCacheAlloc, [434](#)
- TermMemHeap, [436](#)
- TermMemMax, [439](#)
- TermMemTop, [440](#)
- TMaddr, [436](#)
- TMbuff, [443](#)
- TMdolfac, [443](#)
- TMout, [443](#)
- TopologiesLevel, [444](#)
- TopologiesOptions, [444](#)
- TopologiesStart, [437](#)
- TopologiesTerm, [437](#)
- TrimPower, [441](#)
- WildArgTaken, [435](#)
- WildcardBufferSize, [439](#)
- WildMask, [436](#)
- WorkPointer, [435](#)
- WorkSpace, [434](#)
- WorkTop, [434](#)
- T_EEdge, [445](#)
 - ext, [445](#)
 - momc, [445](#)
 - momn, [445](#)
 - nodes, [445](#)
 - padding, [446](#)
- T_EGraph, [446](#)
 - ~T_EGraph, [447](#)
 - edges, [449](#)
 - endSetExtern, [448](#)
 - esym, [449](#)
 - gld, [448](#)
 - init, [447](#)
 - maxdeg, [449](#)
 - nEdges, [448](#)
 - nExtern, [449](#)
 - nNodes, [448](#)
 - nodes, [449](#)
 - nsym, [449](#)
 - opi, [449](#)
 - pld, [448](#)
 - print, [447](#)
 - setExtern, [448](#)
 - T_EGraph, [447](#)
- T_ENode, [450](#)
 - deg, [450](#)
 - edges, [450](#)
 - ext, [450](#)
- T_MGraph, [451](#)
 - ~T_MGraph, [452](#)
 - adjMat, [454](#)
 - c1PI, [454](#)
 - clist, [453](#)
 - curcl, [455](#)
 - discardDisc, [455](#)
 - discardIso, [456](#)
 - discardOrd, [455](#)
 - discardRefine, [455](#)
 - egraph, [455](#)
 - esym, [454](#)
 - generate, [452](#)
 - maxdeg, [453](#)
 - mindeg, [453](#)
 - n1PI, [454](#)

- nBridges, [454](#)
- nCallRefine, [455](#)
- nClasses, [453](#)
- ndiag, [453](#)
- nEdges, [452](#)
- ngconn, [455](#)
- ngen, [455](#)
- nLoops, [453](#)
- nNodes, [452](#)
- nodes, [453](#)
- nsym, [454](#)
- pld, [452](#)
- selOPI, [453](#)
- T_MGraph, [452](#)
- wsopi, [454](#)
- wsum, [454](#)
- T_MNode, [456](#)
 - class, [457](#)
 - deg, [457](#)
 - ext, [457](#)
 - freelg, [457](#)
 - id, [457](#)
 - T_MNode, [456](#)
 - visited, [457](#)
- T_MNodeClass, [458](#)
 - ~T_MNodeClass, [458](#)
 - chkOrd, [460](#)
 - clCmp, [459](#)
 - clist, [460](#)
 - clmat, [461](#)
 - cmpArray, [460](#)
 - copy, [459](#)
 - flist, [461](#)
 - foralignment, [461](#)
 - incMat, [460](#)
 - init, [459](#)
 - maxdeg, [461](#)
 - mkCIMat, [459](#)
 - mkFlist, [459](#)
 - mkNdCI, [459](#)
 - nClasses, [460](#)
 - ndcl, [461](#)
 - nNodes, [460](#)
 - printMat, [459](#)
 - T_MNodeClass, [458](#)
- tabl
 - FuNcTiOn, [144](#)
- table
 - SWITCH, [426](#)
- TaBIeBaSE, [462](#)
 - current, [462](#)
 - fillpoint, [462](#)
 - name, [462](#)
 - numtables, [463](#)
 - subindex, [463](#)
 - tablenumbers, [463](#)
- TABLEBASEFILE
 - ftypes.h, [1383](#)
- TableBaseList
 - C_const, [45](#)
- tablebases
 - variable.h, [3234](#)
- TaBIeBaSEsUbInDeX, [463](#)
 - size, [464](#)
 - where, [464](#)
- tablecheck
 - C_const, [56](#)
- TABLEEXTENSION
 - fsizes.h, [1363](#)
- tablefilling
 - C_const, [60](#)
- TABLEFUNCTION
 - ftypes.h, [1411](#)
- tablenamefill
 - dbase, [79](#)
- tablenames
 - dbase, [80](#)
- tablenamessize
 - dbase, [79](#)
- tablenum
 - TaBIEs, [470](#)
- tablenumber
 - objects, [290](#)
- tablenumbers
 - TaBIeBaSE, [463](#)
- tablepointers
 - TaBIEs, [465](#)
- TableReset
 - declare.h, [844](#)
 - tables.c, [2997](#)
- TABLES
 - structs.h, [2934](#)
- TaBIEs, [464](#)
 - argtail, [466](#)
 - boomlijst, [466](#)
 - bounds, [468](#)
 - buffers, [467](#)
 - buffersfill, [470](#)
 - bufferssize, [469](#)
 - bufnum, [469](#)
 - defined, [467](#)
 - flags, [466](#)
 - MaxTreeSize, [469](#)
 - mdefined, [468](#)
 - mm, [466](#)
 - mode, [470](#)
 - numdummies, [470](#)
 - numind, [468](#)
 - numtree, [469](#)
 - pattern, [466](#)
 - prototype, [465](#)
 - prototypeSize, [468](#)
 - reserved, [467](#)
 - rootnum, [469](#)
 - spare, [467](#)
 - sparse, [468](#)

- strict, 468
- tablenum, 470
- tablepointers, 465
- totind, 467
- tables.c, 2992, 2998
 - Apply, 2997
 - ApplyExec, 2997
 - ApplyReset, 2997
 - CheckTableDeclarations, 2995
 - ClearTableTree, 2993
 - CoApply, 2996
 - CoTableBase, 2994
 - CoTBaddto, 2994
 - CoTBaudit, 2995
 - CoTBCleanup, 2996
 - CoTBcreate, 2994
 - CoTBenter, 2995
 - CoTBhelp, 2996
 - CoTBload, 2995
 - CoTBoff, 2996
 - CoTBon, 2995
 - CoTBopen, 2994
 - CoTBreplace, 2996
 - CoTBuse, 2996
 - CoTestUse, 2995
 - DoTableExpansion, 2993
 - FindTableTree, 2993
 - FindTB, 2994
 - FlipTable, 2994
 - helpth, 2998
 - InsTableTree, 2993
 - RedoTableTree, 2993
 - ReleaseTB, 2997
 - ReWorkT, 2996
 - SpareTable, 2994
 - TableReset, 2997
 - TestUse, 2995
- TABSIZE
 - declare.h, 815
- tablesize
 - SWITCH, 427
- TABLESTUB
 - ftypes.h, 1413
- tabstring
 - O_const, 282
- tadblock
 - MGraph, 216
- TADPOLE
 - ftypes.h, 1473
- tadpole
 - MGraph, 216
- tag
 - PF_BUFFER, 335
- TakeArgContent
 - argument.c, 498
 - declare.h, 934
- TakeContent
 - declare.h, 1015
- ratio.c, 2537
- TakeDollarContent
 - declare.h, 971
 - dollar.c, 1108
- TakeExtraSymbols
 - declare.h, 1015
 - ratio.c, 2537
- TakeIdfunction
 - declare.h, 981
 - pattern.c, 2206
- TakeLongRoot
 - declare.h, 976
 - reken.c, 2593
- TakeModulus
 - declare.h, 880
 - reken.c, 2594
- TakeNormalModulus
 - declare.h, 880
 - reken.c, 2594
- TakeOneLine
 - lus.c, 1718
- TAKEPATH
 - startup.c, 2832
- TakeRatRoot
 - declare.h, 976
 - reken.c, 2587
- TakeSymbolContent
 - declare.h, 1014
 - ratio.c, 2539
- TAKETRACE
 - ftypes.h, 1432
- TalToLine
 - declare.h, 880
 - sch.c, 2686
- TANFUNCTION
 - ftypes.h, 1414
- TANHFUNCTION
 - ftypes.h, 1414
- TCOMMA
 - ftypes.h, 1396
- TCONJUGATE
 - ftypes.h, 1398
- tCouple
 - SProcess, 414
- TDELTA
 - ftypes.h, 1395
- TDIVIDE
 - ftypes.h, 1397
- TDOLLAR
 - ftypes.h, 1395
- TDOT
 - ftypes.h, 1396
- TDOTPRODUCT
 - ftypes.h, 1395
- TDUBIOUS
 - ftypes.h, 1395
- TeInFun
 - N_const, 259

- TELLFILE
 - declare.h, [828](#)
 - tools.c, [3115](#)
- TellFile
 - declare.h, [902](#)
 - tools.c, [3115](#)
- TempDir
 - M_const, [171](#)
- TempSortDir
 - M_const, [171](#)
- EMPTY
 - ftypes.h, [1399](#)
- TENDOFIT
 - ftypes.h, [1398](#)
- tensor
 - FUN_INFO, [142](#)
- TENSORFUNCTION
 - ftypes.h, [1442](#)
- tensorList
 - O_const, [284](#)
- TENVEC
 - ftypes.h, [1432](#)
- TenVec
 - declare.h, [881](#)
 - opera.c, [1990](#)
- TenVecFind
 - declare.h, [881](#)
 - opera.c, [1990](#)
- TePos
 - R_const, [380](#)
- terfirstcomm
 - N_const, [250](#)
- term
 - TERMINFO, [471](#)
- term_compare
 - optimize.cc, [2026](#)
- TermAssign
 - declare.h, [968](#)
 - dollar.c, [1103](#)
- termbuf
 - O_const, [282](#)
- termbuffer
 - N_const, [252](#)
- TERMEXTRAWORDS
 - tools.c, [3110](#)
- TermFree
 - declare.h, [823](#)
- TERMFUNCTION
 - ftypes.h, [1411](#)
- termfunnum
 - M_const, [188](#)
- TERMINAL
 - pre.c, [2349](#)
- Terminate
 - declare.h, [816](#)
- TerminatImpl
 - declare.h, [894](#)
 - startup.c, [2834](#)
- TERMINFO, [471](#)
 - currentMODEL, [471](#)
 - currentModel, [471](#)
 - diaoffset, [472](#)
 - externalset, [472](#)
 - flags, [472](#)
 - internalset, [472](#)
 - legcouple, [471](#)
 - level, [472](#)
 - numdia, [472](#)
 - numextern, [472](#)
 - numtopo, [471](#)
 - term, [471](#)
- termlevel
 - C_const, [65](#)
- TermMalloc
 - declare.h, [822](#)
- TermMallocAddMemory
 - declare.h, [1005](#)
 - tools.c, [3121](#)
- TermMemHeap
 - T_const, [436](#)
- TermMemMax
 - T_const, [439](#)
- TERMMEMSTARTNUM
 - tools.c, [3109](#)
- TermMemTop
 - T_const, [440](#)
- termp
 - TrAcEn, [476](#)
 - TrAcEs, [479](#)
- TermRenumber
 - declare.h, [881](#)
 - store.c, [2865](#)
- terms
 - poly, [361](#)
- Terms2InSmall
 - sOrT, [403](#)
- termscopy
 - poly, [348](#)
- TERMSINBRACKET
 - ftypes.h, [1413](#)
- TermsInBracket
 - declare.h, [988](#)
 - execute.c, [1173](#)
- termsinbracket
 - BrAcKeTiNdEx, [32](#)
- TermsInDollar
 - declare.h, [983](#)
 - dollar.c, [1105](#)
- TERMSINEXPR
 - ftypes.h, [1412](#)
- TermsInExpression
 - declare.h, [983](#)
 - execute.c, [1173](#)
- TermsInSmall
 - sOrT, [402](#)
- termsize

- NeStInG, [272](#)
- TermsLeft
 - sOrT, [403](#)
- termstortstack
 - C_const, [47](#)
- termstack
 - C_const, [47](#)
- termsumcheck
 - C_const, [50](#)
- terstart
 - N_const, [249](#)
- terstop
 - N_const, [249](#)
- TestArgNum
 - declare.h, [1007](#)
 - transform.c, [3181](#)
- TestDoLoop
 - declare.h, [1017](#)
 - dollar.c, [1107](#)
- TestDrop
 - declare.h, [881](#)
 - execute.c, [1170](#)
- TestEndDoLoop
 - declare.h, [1017](#)
 - dollar.c, [1107](#)
- TestFloat
 - float.c, [1306](#)
- TestFunFlag
 - declare.h, [996](#)
 - normal.c, [1907](#)
- TestMatch
 - declare.h, [882](#)
 - pattern.c, [2204](#)
- TestName
 - declare.h, [899](#)
 - names.c, [1866](#)
- TestPartitions
 - declare.h, [840](#)
 - reshuf.c, [2645](#)
- TestSelect
 - declare.h, [980](#)
 - pattern.c, [2205](#)
- TestSub
 - declare.h, [883](#)
 - proces.c, [2459](#)
- TestTables
 - compiler.c, [731](#)
 - declare.h, [964](#)
- TestTerm
 - declare.h, [1005](#)
 - tools.c, [3125](#)
- TestUse
 - declare.h, [843](#)
 - tables.c, [2995](#)
- TestValue
 - C_const, [52](#)
- TeSuOut
 - N_const, [259](#)
- TEXPRESSION
 - ftypes.h, [1395](#)
- TFLOAT
 - ftypes.h, [1399](#)
- TFUN
 - ftypes.h, [1475](#)
- TFUN1
 - ftypes.h, [1475](#)
- TFUNCLOSE
 - ftypes.h, [1397](#)
- TFUNCTION
 - ftypes.h, [1394](#)
- TFUNOPEN
 - ftypes.h, [1397](#)
- TGENINDEX
 - ftypes.h, [1398](#)
- TheDefine
 - declare.h, [912](#)
 - pre.c, [2352](#)
- TheErrorMessage
 - ratio.c, [2541](#)
- thefunction
 - SHvariables, [397](#)
- theposition
 - N_const, [248](#)
- THETA
 - ftypes.h, [1410](#)
- THETA2
 - ftypes.h, [1410](#)
- TheUndefine
 - declare.h, [912](#)
 - pre.c, [2354](#)
- ThreadBalancing
 - C_const, [59](#)
- ThreadBucketSize
 - C_const, [53](#)
- threads.c, [3025](#)
- THREADSCRATCHOUTSIZE
 - fsizes.h, [1363](#)
- THREADSCRATCHSIZE
 - fsizes.h, [1363](#)
- THREADSDEBUG
 - ftypes.h, [1388](#)
- ThreadsFlag
 - C_const, [58](#)
- ThreadSortFileSynch
 - C_const, [59](#)
- ThreadStats
 - C_const, [58](#)
- time0
 - Options, [307](#)
- time1
 - Options, [307](#)
- TimeChildren
 - declare.h, [883](#)
 - tools.c, [3124](#)
- TimeCPU
 - declare.h, [883](#)

- tools.c, [3124](#)
- TimeLimit
 - M_const, [176](#)
- timeout
 - X_const, [492](#)
- TimeWallClock
 - declare.h, [884](#)
 - tools.c, [3124](#)
- TINDEX
 - ftypes.h, [1394](#)
- tlistbuf
 - N_const, [254](#)
- tlistsize
 - N_const, [257](#)
- TMaddr
 - T_const, [436](#)
- TMbuff
 - T_const, [443](#)
- TMdolfac
 - T_const, [443](#)
- TMINUS
 - ftypes.h, [1397](#)
- TMout
 - T_const, [443](#)
- TMPPOLYFUN
 - ftypes.h, [1406](#)
- TMULTIPLY
 - ftypes.h, [1397](#)
- TNOT
 - ftypes.h, [1397](#)
- TNUMBER
 - ftypes.h, [1395](#)
- TNUMBER1
 - ftypes.h, [1398](#)
- to_argument_mpoly
 - flintinterface.h, [1288](#)
- to_argument_poly
 - flintinterface.h, [1288](#), [1289](#)
- to_coefficient_list
 - poly, [353](#)
- to_string
 - poly, [354](#)
- TOBEFACTORED
 - ftypes.h, [1447](#)
- ToBeInFactors
 - C_const, [70](#)
- TOBEUNFACTORED
 - ftypes.h, [1447](#)
- TODISK
 - minos.h, [1781](#)
- ToFast
 - declare.h, [908](#)
 - tools.c, [3123](#)
- TOFLOAT
 - ftypes.h, [1418](#)
- ToFloat
 - float.c, [1308](#)
- toForm
 - topowrap.cc, [3173](#)
- ToGeneral
 - declare.h, [908](#)
 - tools.c, [3123](#)
- tohunt
 - N_const, [256](#)
- token.c, [3079](#), [3082](#)
 - CHECKPOLY, [3080](#)
 - simp1token, [3080](#)
 - simp2token, [3081](#)
 - simp3atoken, [3081](#)
 - simp3btoken, [3081](#)
 - simp4token, [3081](#)
 - simp5token, [3081](#)
 - simp6token, [3081](#)
 - simpwtoken, [3080](#)
 - tokenize, [3080](#)
 - ttypes, [3082](#)
 - WriteTokens, [3080](#)
- tokenarglevel
 - C_const, [51](#)
- tokenize
 - declare.h, [963](#)
 - token.c, [3080](#)
- tokens
 - C_const, [50](#)
- TokensWriteFlag
 - C_const, [57](#)
- TOKENTOLINE
 - declare.h, [808](#)
- TokenToLine
 - declare.h, [884](#)
 - sch.c, [2686](#)
- TOLONG
 - declare.h, [820](#)
- TOLYNDON
 - ftypes.h, [1463](#)
- TOLYNDONR
 - ftypes.h, [1463](#)
- toMNodeClass
 - SProcess, [410](#)
- tools.c, [3107](#), [3127](#)
 - AddToString, [3118](#)
 - AreArgsEqual, [3123](#)
 - CacheNumberMallocAddMemory, [3121](#)
 - CloseChannel, [3116](#)
 - CloseFile, [3113](#)
 - CloseStream, [3112](#)
 - CmpArray, [3117](#)
 - CompareArgs, [3124](#)
 - CompArg, [3124](#)
 - ConWord, [3117](#)
 - CopyFile, [3113](#)
 - Crash, [3125](#)
 - CreateFile, [3113](#)
 - CreateHandle, [3114](#)
 - CreateLogFile, [3113](#)
 - CreateStream, [3112](#)

- DistrN, [3126](#)
- DODOUBLE, [3110](#)
- DOEXPAND, [3110](#)
- DoubleBuffer, [3122](#)
- DoubleList, [3122](#)
- DoubleLList, [3122](#)
- EndOfToken, [3118](#)
- ExpandBuffer, [3122](#)
- filelist, [3126](#)
- filelistsize, [3126](#)
- FILLVALUE, [3109](#)
- FlushFile, [3115](#)
- FromOList, [3122](#)
- FromList, [3121](#)
- FromVarList, [3122](#)
- GetAppendChannel, [3116](#)
- GetChannel, [3116](#)
- GetFromStream, [3111](#)
- GetPosFile, [3115](#)
- GetStreamPosition, [3112](#)
- iexp, [3123](#)
- iniTools, [3120](#)
- IsLikeVector, [3123](#)
- LoadInputFile, [3111](#)
- LocateFile, [3111](#)
- LongCopy, [3119](#)
- LongLongCopy, [3119](#)
- LookInStream, [3111](#)
- M_check1, [3121](#)
- M_free, [3121](#)
- M_print, [3121](#)
- MakeDate, [3119](#)
- Malloc1, [3120](#)
- NUMBEREXTRAWORDS, [3110](#)
- NumberMallocAddMemory, [3121](#)
- NUMBERMEMSTARTNUM, [3110](#)
- NumCopy, [3119](#)
- numinfilelist, [3126](#)
- NumToStr, [3117](#)
- OpenAddFile, [3113](#)
- OpenFile, [3112](#)
- OpenStream, [3111](#)
- PositionStream, [3112](#)
- ReadFile, [3114](#)
- ReadFromStream, [3111](#)
- ReadPosFile, [3114](#)
- ReadSnum, [3119](#)
- ReOpenFile, [3113](#)
- ReverseStatements, [3112](#)
- SeekFile, [3114](#)
- set_del, [3120](#)
- set_in, [3120](#)
- set_set, [3120](#)
- set_sub, [3120](#)
- SetPosFile, [3115](#)
- SkipField, [3119](#)
- StartFiles, [3112](#)
- StrCmp, [3116](#)
- strDup1, [3118](#)
- StrHICmp, [3117](#)
- StrlCmp, [3116](#)
- StrlCont, [3117](#)
- StrLen, [3117](#)
- SynchFile, [3115](#)
- TELLFILE, [3115](#)
- TellFile, [3115](#)
- TERMEXTRAWORDS, [3110](#)
- TermMallocAddMemory, [3121](#)
- TERMMEMSTARTNUM, [3109](#)
- TestTerm, [3125](#)
- TimeChildren, [3124](#)
- TimeCPU, [3124](#)
- TimeWallClock, [3124](#)
- ToFast, [3123](#)
- ToGeneral, [3123](#)
- ToPolyFunGeneral, [3123](#)
- ToToken, [3118](#)
- TruncateFile, [3116](#)
- UpdateMaxSize, [3116](#)
- WriteFile, [3126](#)
- WriteFileToFile, [3114](#)
- WriteString, [3118](#)
- WriteUnfinString, [3118](#)
- toOrbits
 - MOrbits, [241](#)
- TOOUTPUT
 - ftypes.h, [1390](#)
- Top
 - CbUf, [71](#)
- top
 - StreaM, [422](#)
- TOPBITONLY
 - form3.h, [1345](#)
- TOPLONGBITONLY
 - form3.h, [1345](#)
- topnumber
 - dbase, [79](#)
- TOPO
 - ftypes.h, [1417](#)
- TOPO_MAXVERT
 - diawrap.cc, [1068](#)
- TOPOLOGIES
 - ftypes.h, [1417](#)
- TopologiesLevel
 - T_const, [444](#)
- TOPOLOGIESONLY
 - ftypes.h, [1471](#)
- TopologiesOptions
 - T_const, [444](#)
- TopologiesStart
 - T_const, [437](#)
- TopologiesTerm
 - T_const, [437](#)
- ToPolyFunGeneral
 - declare.h, [908](#)
 - tools.c, [3123](#)

- TOPOLYNOMIALFLAG
 - ftypes.h, 1464
- topolynomialflag
 - C_const, 61
- ToPoTyPe, 473
 - cldeg, 474
 - clxt, 474
 - clnum, 474
 - cmaxd, 474
 - cmind, 474
 - ncl, 475
 - nlegs, 475
 - nloops, 475
 - npadding, 475
 - nvert, 475
 - opt, 474
 - sopi, 475
 - vert, 474
 - vertmax, 474
- topowrap.cc, 3172, 3174
 - GenerateTopologies, 3173
 - GenerateVertices, 3173
 - MAXPOINTS, 3173
 - toForm, 3173
- toppos
 - StOrEcAcHe, 416
- topsubexpbuffers
 - compiler.c, 733
- toptokens
 - C_const, 50
- TORAT
 - ftypes.h, 1419
- ToRat
 - float.c, 1308
- ToStorage
 - declare.h, 884
 - store.c, 2864
- tostring
 - factorized_poly, 126
- total_degree
 - poly, 350
- totalc
 - EGraph, 112
- totalnumberofthreads
 - M_const, 179
- toterm
 - sort.c, 2764
- totind
 - TaBIes, 467
- ToToken
 - declare.h, 925
 - tools.c, 3118
- TPLUS
 - ftypes.h, 1397
- TPOWER
 - ftypes.h, 1397
- TPOWER1
 - ftypes.h, 1398
- Trace4
 - declare.h, 884
 - opera.c, 1988
- Trace4Gen
 - declare.h, 884
 - opera.c, 1989
- Trace4no
 - declare.h, 885
 - opera.c, 1988
- tracebackflag
 - M_const, 187
- TraceFind
 - declare.h, 885
 - opera.c, 1990
- TRACEN
 - structs.h, 2935
- TrAcEn, 476
 - accu, 476
 - accup, 476
 - allsign, 477
 - factor, 477
 - inlist, 477
 - level, 477
 - num, 477
 - perm, 477
 - sgn, 477
 - temp, 476
- TraceN
 - declare.h, 885
 - opera.c, 1989
- TraceNgen
 - declare.h, 885
 - opera.c, 1989
- TraceNno
 - declare.h, 885
 - opera.c, 1989
- TRACES
 - structs.h, 2935
- TrAcEs, 478
 - a3, 482
 - a4, 482
 - accu, 479
 - accup, 479
 - ad, 481
 - allsign, 483
 - e3, 480
 - e4, 480
 - eers, 480
 - factor, 483
 - finalstep, 483
 - gamm, 481
 - gamma5, 482
 - inlist, 479
 - j3, 480
 - j4, 480
 - kstep, 481
 - lc3, 482
 - lc4, 482

- level, [483](#)
- mdel, [480](#)
- mdum, [481](#)
- mepf, [480](#)
- nt3, [479](#)
- nt4, [479](#)
- num, [482](#)
- pdel, [481](#)
- pepf, [480](#)
- perm, [479](#)
- sgn, [481](#)
- sign1, [482](#)
- sign2, [482](#)
- stap, [481](#)
- step1, [481](#)
- termp, [479](#)
- Traces
 - declare.h, [885](#)
 - opera.c, [1989](#)
- tracestack
 - N_const, [252](#)
- TransEname
 - C_const, [53](#)
- TransferBuffer
 - declare.h, [981](#)
 - pattern.c, [2206](#)
- transFlag
 - O_const, [287](#)
- transform.c, [3177](#), [3182](#)
 - CoTransform, [3178](#)
 - FindRange, [3181](#)
 - PutArgInScratch, [3181](#)
 - ReadRange, [3181](#)
 - RunAddArg, [3180](#)
 - RunCycle, [3179](#)
 - RunDecode, [3178](#)
 - RunDedup, [3179](#)
 - RunDropArg, [3180](#)
 - RunEncode, [3178](#)
 - RunExplode, [3179](#)
 - RunHtoZArg, [3181](#)
 - RunImplode, [3179](#)
 - RunIsLyndon, [3180](#)
 - RunMulArg, [3180](#)
 - RunPermute, [3179](#)
 - RunReplace, [3178](#)
 - RunReverse, [3179](#)
 - RunSelectArg, [3180](#)
 - RunToLyndon, [3180](#)
 - RunTransform, [3178](#)
 - RunZtoHArg, [3181](#)
 - TestArgNum, [3181](#)
- TransformRational
 - declare.h, [1027](#)
 - dict.c, [1084](#)
- TranslateExpression
 - declare.h, [983](#)
 - dollar.c, [1106](#)
- TRAP SIGNALS
 - unix.h, [3225](#)
- TreatPolyRatFun
 - declare.h, [998](#)
 - normal.c, [1906](#)
- tree, [483](#)
 - blnce, [484](#)
 - left, [484](#)
 - parent, [484](#)
 - right, [484](#)
 - sOrT, [401](#)
 - usage, [485](#)
 - value, [484](#)
- tree_node, [485](#)
 - childs, [486](#)
 - finished, [487](#)
 - num_visits, [487](#)
 - operator=, [486](#)
 - sum_results, [486](#)
 - tree_node, [486](#)
 - var, [487](#)
- Trick
 - declare.h, [886](#)
 - opera.c, [1988](#)
- TrimPower
 - T_const, [441](#)
- TRUE_EXPR
 - pre.c, [2349](#)
- TruncateFile
 - declare.h, [903](#)
 - tools.c, [3116](#)
- TryDo
 - declare.h, [886](#)
 - reshuf.c, [2645](#)
- TryEnvironment
 - declare.h, [993](#)
 - setfile.c, [2726](#)
- TryFileSetups
 - declare.h, [981](#)
 - setfile.c, [2726](#)
- TryRecover
 - declare.h, [808](#)
- tryterm
 - N_const, [261](#)
- TSET
 - ftypes.h, [1395](#)
- TSETCLOSE
 - ftypes.h, [1398](#)
- TSETDOL
 - ftypes.h, [1399](#)
- TSETNUM
 - ftypes.h, [1399](#)
- TSETOPEN
 - ftypes.h, [1398](#)
- TSGAMMA
 - ftypes.h, [1399](#)
- TSUBEXP
 - ftypes.h, [1395](#)

- TSYMBOL
 - ftypes.h, [1394](#)
- ttypes
 - token.c, [3082](#)
- TVECTOR
 - ftypes.h, [1394](#)
- TWILDARG
 - ftypes.h, [1396](#)
- TWILDCARD
 - ftypes.h, [1396](#)
- TwoExprCompare
 - declare.h, [984](#)
 - dollar.c, [1106](#)
- type
 - ARGBUFFER, [15](#)
 - DICTIONARY_ELEMENT, [84](#)
 - DoLIaR, [88](#)
 - DoLoOp, [91](#)
 - FaCdOILaR, [125](#)
 - fixedset, [137](#)
 - InDeX, [149](#)
 - KEYWORD, [162](#)
 - KEYWORDV, [163](#)
 - MoDoPtDoLIaR, [238](#)
 - NaMeNode, [264](#)
 - optimization, [293](#)
 - PaRtlcLe, [331](#)
 - PF_BUFFER, [335](#)
 - PNodeClass, [341](#)
 - SeTs, [388](#)
 - SETUPPARAMETERS, [390](#)
 - sOrT, [404](#)
 - StreaM, [423](#)
 - VeRtEx, [491](#)
- TYPEADJUSTBOUNDS
 - ftypes.h, [1427](#)
- TYPEALLLOOPS
 - ftypes.h, [1431](#)
- TYPEALLPATHS
 - ftypes.h, [1431](#)
- TYPEAPPLY
 - ftypes.h, [1428](#)
- TYPEAPPLYRESET
 - ftypes.h, [1428](#)
- TYPEARG
 - ftypes.h, [1425](#)
- TYPEARGEXPLODE
 - ftypes.h, [1429](#)
- TYPEARGHEADSIZE
 - ftypes.h, [1437](#)
- TYPEARGIMPLODE
 - ftypes.h, [1429](#)
- TYPEARGTOEXTRASymbol
 - ftypes.h, [1431](#)
- TYPEASSIGN
 - ftypes.h, [1426](#)
- TYPECANONICALIZE
 - ftypes.h, [1431](#)
- TYPECHAININ
 - ftypes.h, [1428](#)
- TYPECHAINOUT
 - ftypes.h, [1429](#)
- TYPECHISHOLM
 - ftypes.h, [1424](#)
- TYPECLEARUSERFLAG
 - ftypes.h, [1431](#)
- TYPECOUNT
 - ftypes.h, [1423](#)
- TYPEDENOMINATORS
 - ftypes.h, [1429](#)
- TYPEDETCURDUM
 - ftypes.h, [1427](#)
- TYPEDISCARD
 - ftypes.h, [1424](#)
- TYPEDOLOOP
 - ftypes.h, [1430](#)
- TYPEDROPCOEFFICIENT
 - ftypes.h, [1429](#)
- TYPEDROPSYMBOLS
 - ftypes.h, [1430](#)
- TYPEELIF
 - ftypes.h, [1424](#)
- TYPEELSE
 - ftypes.h, [1424](#)
- TYPEENDDOLOOP
 - ftypes.h, [1430](#)
- TYPEENDIF
 - ftypes.h, [1424](#)
- TYPEENDREPEAT
 - ftypes.h, [1423](#)
- TYPEENDSWITCH
 - ftypes.h, [1431](#)
- TYPEEXIT
 - ftypes.h, [1425](#)
- TYPEEXPRESSION
 - ftypes.h, [1422](#)
- TYPEFACTARG
 - ftypes.h, [1426](#)
- TYPEFACTARG2
 - ftypes.h, [1426](#)
- TYPEFACTOR
 - ftypes.h, [1429](#)
- TYPEFINDLOOP
 - ftypes.h, [1427](#)
- TYPEFPRINT
 - ftypes.h, [1425](#)
- TYPEFROMPOLYNOMIAL
 - ftypes.h, [1430](#)
- typeGName
 - Particle, [329](#)
- TYPEGOTO
 - ftypes.h, [1423](#)
- TYPEIDNEW
 - ftypes.h, [1423](#)
- TYPEIDOLD
 - ftypes.h, [1423](#)

- TYPEIF
 - ftypes.h, [1424](#)
- TYPEINEXPRESSION
 - ftypes.h, [1428](#)
- TYPEINSIDE
 - ftypes.h, [1427](#)
- TYPEISFUN
 - ftypes.h, [1399](#)
- TYPEISMYSTERY
 - ftypes.h, [1399](#)
- TYPEISSUB
 - ftypes.h, [1399](#)
- TYPEMERGE
 - ftypes.h, [1428](#)
- TYPEMULT
 - ftypes.h, [1423](#)
- typeName
 - Particle, [329](#)
- TYPENORM
 - ftypes.h, [1425](#)
- TYPENORM2
 - ftypes.h, [1425](#)
- TYPENORM3
 - ftypes.h, [1425](#)
- TYPENORM4
 - ftypes.h, [1429](#)
- TYPEOPERATION
 - ftypes.h, [1423](#)
- TYPEPRINT
 - ftypes.h, [1425](#)
- TYPEPUTINSIDE
 - ftypes.h, [1430](#)
- TYPEREDEFPRE
 - ftypes.h, [1426](#)
- TYPERENUMBER
 - ftypes.h, [1426](#)
- TYPEREPEAT
 - ftypes.h, [1423](#)
- TYPEREVERSE
 - ftypes.h, [1424](#)
- TYPESETEXIT
 - ftypes.h, [1425](#)
- TYPESETUSERFLAG
 - ftypes.h, [1431](#)
- TYPESORT
 - ftypes.h, [1427](#)
- TYPESPLITARG
 - ftypes.h, [1426](#)
- TYPESPLITARG2
 - ftypes.h, [1426](#)
- TYPESPLITFIRSTARG
 - ftypes.h, [1428](#)
- TYPESPLITLASTARG
 - ftypes.h, [1428](#)
- TYPESTUFFLE
 - ftypes.h, [1429](#)
- TYPESUM
 - ftypes.h, [1424](#)
- TYPESUMFIX
 - ftypes.h, [1427](#)
- TYPESWITCH
 - ftypes.h, [1431](#)
- typetable
 - SWITCH, [427](#)
- TYPETERM
 - ftypes.h, [1427](#)
- TYPETESTUSE
 - ftypes.h, [1428](#)
- TYPETOPOLYNOMIAL
 - ftypes.h, [1430](#)
- TYPETOSPECTATOR
 - ftypes.h, [1430](#)
- TYPETRANSFORM
 - ftypes.h, [1430](#)
- TYPETRY
 - ftypes.h, [1426](#)
- TYPEUNRAVEL
 - ftypes.h, [1427](#)
- UBYTE
 - form3.h, [1350](#)
- Uclose
 - form3.h, [1347](#)
- uflags
 - ExPrEsSiOn, [124](#)
- Uflush
 - form3.h, [1347](#)
- Ugetpos
 - form3.h, [1348](#)
- UINT
 - form3.h, [1350](#)
- ULONG
 - form3.h, [1350](#)
- uncompressed
 - objects, [290](#)
- UngetChar
 - declare.h, [808](#)
- UngetFromStream
 - declare.h, [808](#)
- UNHIDE
 - ftypes.h, [1437](#)
- UNHIDEGEXPRESSION
 - ftypes.h, [1440](#)
- UNHIDELEXPRESSION
 - ftypes.h, [1439](#)
- UNIVARIATE_DENSITY_THR
 - flintinterface.cc, [1255](#)
- unix.h, [3223](#), [3226](#)
 - ALTSEPARATOR, [3225](#)
 - CARRIAGEReturn, [3224](#)
 - LINEFEED, [3224](#)
 - P_term, [3225](#)
 - PATHSEPARATOR, [3225](#)
 - SEPARATOR, [3225](#)
 - TRAPsignals, [3225](#)
 - WITH_ALARM, [3225](#)
 - WITH_ENV, [3225](#)

- WITHEXTERNALCHANNEL, 3224
- WITHPIPE, 3224
- WITHSYSTEM, 3224
- unixfile.c, 3227
- UNLOCK
 - declare.h, 825
- UNPACK
 - ftypes.h, 1460
- UnPack
 - declare.h, 886
 - reken.c, 2586
- UNPACK_LONG
 - parallel.c, 2096
- UnpackFloat
 - evaluate.c, 1158
 - float.c, 1305
- UNRWLOCK
 - declare.h, 825
- UnsetAllowDelay
 - declare.h, 910
 - pre.c, 2350
- UnSetDictionary
 - declare.h, 1026
 - dict.c, 1086
- UnSetMods
 - declare.h, 889
 - execute.c, 1171
- UnsureDollarMode
 - C_const, 57
- Uopen
 - form3.h, 1347
- updateCandNode
 - Assign, 21
- UpdateMaxSize
 - declare.h, 1011
 - tools.c, 3116
- UpdatePositions
 - declare.h, 984
 - execute.c, 1173
- Uread
 - form3.h, 1347
- usage
 - tree, 485
- used
 - sOrT, 399
- USEDFLAG
 - ftypes.h, 1445
- UsedFunction
 - N_const, 250
- UseDictionary
 - dict.c, 1085
- UsedIndex
 - N_const, 250
- UsedOtherFind
 - N_const, 256
- UsedSymbol
 - N_const, 250
- UsedVector
 - N_const, 250
- Useek
 - form3.h, 1348
- UseFindOnly
 - N_const, 255
- usenames
 - NaMeSpAcE, 265
- UserFlags
 - pre.c, 2366
- Usetbuf
 - form3.h, 1348
- Usetpos
 - form3.h, 1348
- Ustdout
 - form3.h, 1349
- Usync
 - form3.h, 1349
- Utell
 - form3.h, 1348
- Utruncate
 - form3.h, 1349
- UWORD
 - form3.h, 1350
- Uwrite
 - form3.h, 1348
- va_arg
 - sch.c, 2685
- va_dcl
 - sch.c, 2684
- va_end
 - sch.c, 2684
- va_list
 - sch.c, 2685
- va_start
 - sch.c, 2684
- value
 - FaCdOILaR, 125
 - pReVaR, 365
 - SETUPPARAMETERS, 390
 - SWITCHTABLE, 428
 - tree, 484
- values
 - Options, 306
- var
 - KEYWORDV, 163
 - tree_node, 487
- var_map_t
 - flintinterface.h, 1283
- variable.h, 3230, 3240
 - A, 3239
 - AC, 3238
 - AM, 3238
 - AN, 3238
 - AO, 3238
 - AP, 3238
 - AR, 3238
 - AS, 3239
 - AT, 3239

- autofunctions, [3236](#)
- autoindices, [3237](#)
- autosymbols, [3237](#)
- autovectors, [3237](#)
- AX, [3239](#)
- BUG, [3238](#)
- cbuf, [3235](#)
- channels, [3235](#)
- chartype, [3232](#)
- Dollars, [3236](#)
- DoLoops, [3232](#)
- Dubious, [3236](#)
- Expressions, [3236](#)
- FG, [3239](#)
- fixedsets, [3239](#)
- functions, [3233](#)
- GlobalFunctions, [3235](#)
- GlobalIndices, [3235](#)
- GlobalSetElements, [3235](#)
- GlobalSets, [3235](#)
- GlobalSymbols, [3235](#)
- GlobalVectors, [3235](#)
- indices, [3233](#)
- MaxDoLoops, [3232](#)
- MaxNumPre, [3233](#)
- MaxProcedures, [3232](#)
- ModOptdollars, [3237](#)
- NumDollars, [3236](#)
- NumDoLoops, [3232](#)
- NumDubious, [3236](#)
- NumExpressions, [3236](#)
- NumFunctions, [3234](#)
- NumIndices, [3234](#)
- NumModOptdollars, [3238](#)
- NumOutputChannels, [3236](#)
- NumPotModdollars, [3237](#)
- NumPre, [3233](#)
- NumProcedures, [3232](#)
- NumSetElements, [3234](#)
- NumSets, [3234](#)
- NumSymbols, [3234](#)
- NumTableBases, [3234](#)
- NumVectors, [3234](#)
- numxsymbol, [3237](#)
- PotModdollars, [3237](#)
- PreVar, [3232](#)
- Procedures, [3232](#)
- SetElements, [3233](#)
- Sets, [3233](#)
- setupfilename, [3240](#)
- symbols, [3233](#)
- tablebases, [3234](#)
- vectors, [3233](#)
- WriteFile, [3239](#)
- xsymbol, [3237](#)
- variables
 - DICTIONARY, [82](#)
 - InDeXeNtRy, [153](#)
- VARNAME
 - declare.h, [816](#)
- VARNAMES
 - ftypes.h, [1460](#)
- varnames
 - C_const, [43](#)
- VARRENUM
 - structs.h, [2933](#)
- VaRrEnUm, [487](#)
 - hi, [488](#)
 - lo, [488](#)
 - start, [488](#)
- vars
 - DoLoOp, [90](#)
- VarStore
 - declare.h, [886](#)
 - store.c, [2865](#)
- VarType
 - FixedGlobals, [135](#)
- VARTYPECOMPLEX
 - ftypes.h, [1447](#)
- VARTYPEIMAGINARY
 - ftypes.h, [1448](#)
- VARTYPEMINUS
 - ftypes.h, [1448](#)
- VARTYPENONE
 - ftypes.h, [1447](#)
- VARTYPEROOTOFUNITY
 - ftypes.h, [1448](#)
- vdef
 - Model, [233](#)
- vecnum
 - ReNuMbEr, [385](#)
- vect
 - ReNuMbEr, [384](#)
- VECTBIT
 - ftypes.h, [1454](#)
- VECTOMIN
 - ftypes.h, [1433](#)
- VECTOR
 - ftypes.h, [1404](#)
- VeCtOr, [488](#)
 - complex, [489](#)
 - dimension, [489](#)
 - flags, [489](#)
 - name, [489](#)
 - namesize, [489](#)
 - node, [489](#)
 - number, [489](#)
- Vector
 - vector.h, [3243](#)
- vector.h, [3242](#), [3251](#)
 - DeclareVector, [3244](#)
 - Vector, [3243](#)
 - VectorBack, [3245](#)
 - VectorCapacity, [3246](#)
 - VectorClear, [3247](#)
 - VectorEmpty, [3247](#)

- VectorErase, [3250](#)
- VectorErases, [3250](#)
- VectorFree, [3244](#)
- VectorFront, [3245](#)
- VectorInit, [3244](#)
- VectorInsert, [3249](#)
- VectorInserts, [3249](#)
- VectorPopBack, [3248](#)
- VectorPtr, [3245](#)
- VectorPushBack, [3248](#)
- VectorPushBacks, [3248](#)
- VectorReserve, [3247](#)
- VectorSize, [3246](#)
- VectorStruct, [3243](#)
- VECTOR_
 - ftypes.h, [1444](#)
- VectorBack
 - vector.h, [3245](#)
- VectorCapacity
 - vector.h, [3246](#)
- VectorClear
 - vector.h, [3247](#)
- VectorEmpty
 - vector.h, [3247](#)
- VectorErase
 - vector.h, [3250](#)
- VectorErases
 - vector.h, [3250](#)
- VectorFree
 - vector.h, [3244](#)
- VectorFront
 - vector.h, [3245](#)
- VectorInit
 - vector.h, [3244](#)
- VectorInsert
 - vector.h, [3249](#)
- VectorInserts
 - vector.h, [3249](#)
- vectorlikeLHS
 - C_const, [63](#)
- VectorList
 - C_const, [44](#)
- VECTORONLY
 - ftypes.h, [1391](#)
- VectorPopBack
 - vector.h, [3248](#)
- VectorPtr
 - vector.h, [3245](#)
- VectorPushBack
 - vector.h, [3248](#)
- VectorPushBacks
 - vector.h, [3248](#)
- VectorReserve
 - vector.h, [3247](#)
- Vectors
 - C_const, [46](#)
- vectors
 - variable.h, [3233](#)
- VectorSize
 - vector.h, [3246](#)
- VectorStruct
 - vector.h, [3243](#)
- vectorzero
 - M_const, [191](#)
- VECTOSUB
 - ftypes.h, [1433](#)
- VECTOVEC
 - ftypes.h, [1433](#)
- VERSIONSTR
 - startup.c, [2832](#)
- VERSIONSTR__
 - startup.c, [2831](#)
- vert
 - ToPoTyPe, [474](#)
- VeRtEx, [490](#)
 - couplings, [490](#)
 - error, [491](#)
 - externonly, [491](#)
 - ncouplings, [491](#)
 - nparticles, [491](#)
 - particles, [490](#)
 - spare, [491](#)
 - type, [491](#)
- VERTEXFUNCTION
 - ftypes.h, [1442](#)
- vertices
 - MoDeL, [235](#)
- vertmax
 - ToPoTyPe, [474](#)
- vetofilling
 - C_const, [60](#)
- vetotablebasefill
 - C_const, [60](#)
- vflags
 - ExPrEsSiOn, [123](#)
- visit
 - MGraph, [209](#)
- visited
 - EEdge, [99](#)
 - ENode, [118](#)
 - MNode, [222](#)
 - T_MNode, [457](#)
- VORTRANMODE
 - ftypes.h, [1401](#)
- wAGraphs
 - Assign, [25](#)
 - Process, [373](#)
 - SProcess, [415](#)
- WantAddLongs
 - declare.h, [821](#)
- WantAddPointers
 - declare.h, [821](#)
- WantAddPositions
 - declare.h, [822](#)
- wAOPI
 - Assign, [25](#)

- Process, [373](#)
- SProcess, [415](#)
- WARMUP
 - reken.c, [2585](#)
- WarnFlag
 - C_const, [57](#)
- Warning
 - declare.h, [890](#)
 - message.c, [1743](#)
- WCN
 - structs.h, [2937](#)
- WCN2
 - structs.h, [2938](#)
- WCOPY
 - declare.h, [810](#)
- wgraphs
 - Process, [372](#)
- where
 - DoLIaRS, [88](#)
 - FaCdOILaR, [125](#)
 - PaRtl, [326](#)
 - TaBIEbAsEsUbInDeX, [464](#)
- whichbuffer
 - ExPrEsSiOn, [123](#)
- WhileLevel
 - C_const, [67](#)
- whilelevel
 - SWITCH, [428](#)
- wildarg
 - pReVaR, [366](#)
- WILDARGFUN
 - ftypes.h, [1413](#)
- WILDARGINDEX
 - ftypes.h, [1422](#)
- WildArgs
 - N_const, [260](#)
- WILDARGSYMBOL
 - ftypes.h, [1421](#)
- WildArgTaken
 - T_const, [435](#)
- WILDARGVECTOR
 - ftypes.h, [1422](#)
- WildC
 - C_const, [48](#)
- wildcard.c, [3254](#), [3256](#)
 - AddWild, [3255](#)
 - CheckWild, [3255](#)
 - ClearWild, [3255](#)
 - DEBUG, [3255](#)
 - DenToFunction, [3256](#)
 - ResolveSet, [3255](#)
 - WildFill, [3255](#)
- WildcardBufferSize
 - C_const, [56](#)
 - T_const, [439](#)
- WildcardNames
 - C_const, [50](#)
- WILDCARDS
 - ftypes.h, [1434](#)
- WildDirt
 - N_const, [259](#)
- WildDollars
 - declare.h, [968](#)
 - dollar.c, [1103](#)
- WILDDUMMY
 - ftypes.h, [1432](#)
- WildEat
 - N_const, [260](#)
- WildFill
 - declare.h, [886](#)
 - wildcard.c, [3255](#)
- wildflag
 - C_const, [55](#)
- WILDMASK
 - form3.h, [1346](#)
- WildMask
 - T_const, [436](#)
- wildoffset
 - STOREHEADER, [420](#)
- WildReserve
 - N_const, [259](#)
- WildStop
 - N_const, [249](#)
- WildValue
 - N_const, [249](#)
- Willnd
 - M_const, [184](#)
- WITH_ALARM
 - unix.h, [3225](#)
- WITH_ENV
 - fwin.h, [1515](#)
 - unix.h, [3225](#)
- WITHAUTO
 - ftypes.h, [1391](#)
- WITHBLOCKS
 - ftypes.h, [1471](#)
- WITHCUTOFF
 - float.c, [1300](#)
- WITHEDGES
 - ftypes.h, [1471](#)
- WITHERROR
 - ftypes.h, [1381](#)
- WITHEXTERNALCHANNEL
 - unix.h, [3224](#)
- WITHONEPISETS
 - ftypes.h, [1471](#)
- WITHOUTERROR
 - ftypes.h, [1381](#)
- withoutflush
 - minos.c, [1763](#)
 - minos.h, [1783](#)
- WITHOUTNODES
 - ftypes.h, [1471](#)
- WITHOUTSEMICOLON
 - ftypes.h, [1386](#)
- WITHPIPE

- unix.h, [3224](#)
- WITHRETURN
 - fwin.h, [1514](#)
- WITHSEMICOLON
 - ftypes.h, [1385](#)
- WITHSORTBOTS
 - form3.h, [1347](#)
- WITHSYMMETRIZEF
 - ftypes.h, [1472](#)
- WITHSYMMETRIZEI
 - ftypes.h, [1471](#)
- WITHSYSTEM
 - fwin.h, [1514](#)
 - unix.h, [3224](#)
- wlen
 - O_const, [285](#)
- wMGraphs
 - Process, [373](#)
 - SProcess, [414](#)
- wMOPI
 - Process, [373](#)
 - SProcess, [415](#)
- wopi
 - Process, [372](#)
- WORD
 - form3.h, [1350](#)
- WORD_MAX_VALUE
 - form3.h, [1345](#)
- WORD_MIN_VALUE
 - form3.h, [1345](#)
- WORDDIF
 - declare.h, [815](#)
- WORDMASK
 - form3.h, [1346](#)
- WorkPointer
 - T_const, [435](#)
- WorkSize
 - M_const, [175](#)
- WorkSpace
 - T_const, [434](#)
- WorkTop
 - T_const, [434](#)
- wpoin
 - O_const, [282](#)
- wpos
 - O_const, [282](#)
- wranf
 - declare.h, [997](#)
 - reken.c, [2595](#)
- wranfcall
 - R_const, [379](#)
- wranfia
 - R_const, [377](#)
- wranfnpair1
 - R_const, [379](#)
- wranfnpair2
 - R_const, [379](#)
- wranfseed
 - R_const, [378](#)
- WriteAll
 - declare.h, [887](#)
 - sch.c, [2688](#)
- WriteArgument
 - declare.h, [887](#)
 - sch.c, [2687](#)
- WRITEBUFTOEXTCHANNEL
 - declare.h, [827](#)
- WriteDictionary
 - declare.h, [1027](#)
 - sch.c, [2687](#)
- WriteDollarFactorToBuffer
 - declare.h, [967](#)
 - dollar.c, [1103](#)
- WriteDollarToBuffer
 - declare.h, [967](#)
 - dollar.c, [1102](#)
- WriteExpression
 - declare.h, [887](#)
 - sch.c, [2688](#)
- WRITEFILE
 - declare.h, [827](#)
- WriteFile
 - tools.c, [3126](#)
 - variable.h, [3239](#)
- WriteFileToFile
 - declare.h, [901](#)
 - tools.c, [3114](#)
- WriteIndex
 - declare.h, [990](#)
 - minos.c, [1759](#)
- WriteIndexBlock
 - declare.h, [989](#)
 - minos.c, [1759](#)
- WriteNilInfo
 - declare.h, [990](#)
 - minos.c, [1759](#)
- WriteInnerTerm
 - declare.h, [887](#)
 - sch.c, [2688](#)
- WriteLists
 - declare.h, [887](#)
 - sch.c, [2687](#)
- WriteNamesBlock
 - declare.h, [990](#)
 - minos.c, [1759](#)
- WriteObject
 - declare.h, [991](#)
 - minos.c, [1761](#)
- WriteOne
 - declare.h, [887](#)
 - sch.c, [2688](#)
- WRITEOUT
 - ftypes.h, [1388](#)
- WriteSetup
 - declare.h, [888](#)
 - setfile.c, [2725](#)

WriteStats
 declare.h, 888
 sort.c, 2750
WriteStoreHeader
 declare.h, 1002
 store.c, 2867
WriteString
 declare.h, 921
 tools.c, 3118
WriteSubTerm
 declare.h, 888
 sch.c, 2688
WriteTerm
 declare.h, 889
 sch.c, 2688
writeToChannel
 declare.h, 995
 pre.c, 2363
WriteTokens
 declare.h, 963
 token.c, 3080
WriteUnfinString
 declare.h, 921
 tools.c, 3118
WrtPower
 declare.h, 830
 sch.c, 2687
wscon
 MGraph, 214
wszEOF
 declare.h, 815
wsopi
 MGraph, 214
 T_MGraph, 454
wsum
 T_MGraph, 454
WTimeStatsFlag
 C_const, 62

X
 AllGlobals, 11
X_const, 492
 currentExternalChannel, 493
 currentPrompt, 492
 daemonize, 493
 killSignal, 492
 killWholeGroup, 493
 shellName, 492
 stderrName, 492
 timeout, 492
xsymbol
 variable.h, 3237

YESLYNDON
 ftypes.h, 1464

Z_
 ftypes.h, 1443
zbufnum
 M_const, 178
zero
 DoLIaRS, 88
ZEROARG
 declare.h, 813
ZeroFillRange
 declare.h, 815
zeropos
 M_const, 171
zerorhs
 M_const, 191
ZeroTable
 float.c, 1306
ZtoForm
 float.c, 1301
ZTOHARG
 ftypes.h, 1464