
# SAS Enterprise Miner Report

User = s198117
Date = 22:58:47 April 18
Project = kk
Diagram = jjjjjj

Start Node = Report
Node label = Reporter
Nodes = PATH
Showall = N

Format = PDF
Style = LISTING

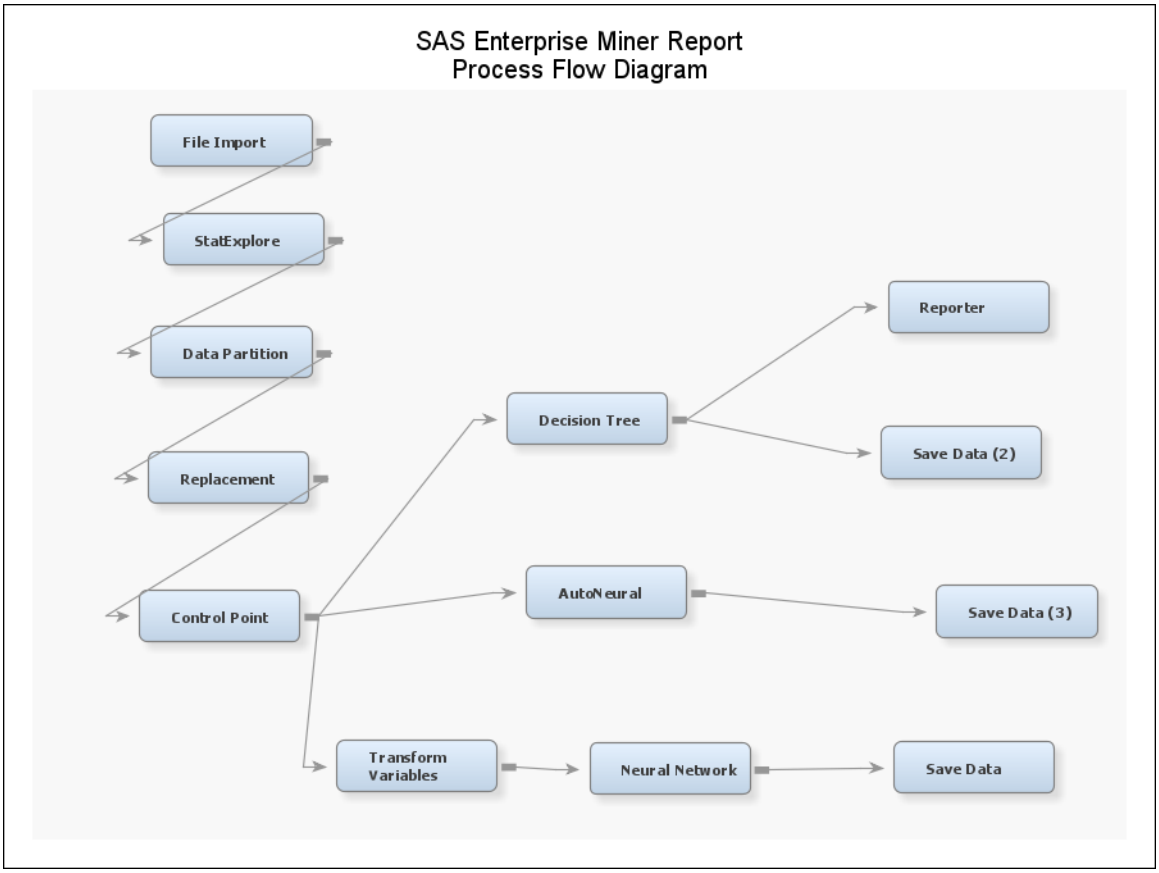

# SAS Enterprise Miner Report

## Node=File Import
## Summary

Node id = FIMPORT
Node label = File Import
Meta path = FIMPORT
Notes =

## Node=File Import
## Properties

| Property | Value | Default | Property | Value | Default | Property | Value | Default |
|---|---|---|---|---|---|---|---|---|
| Component | FileImport | | GuessRows | 500 | | NameRow | Y | |
| AccessTable | NoTableName | | IFileName | D:\Car1.csv | | Password | NoPassword | |
| AdvancedAdvisor | N | | ImportType | Local | LOCAL | Role | TRAIN | |
| Delimiter | , | | MaxCols | 10000 | | SkipRows | 0 | |
| FileType | csv | XLS | MaxRows | 1000000 | | Summarize | N | |

## Node=File Import
## Data Attributes

| Attribute | Value | Attribute | Value | Attribute | Value |
|---|---|---|---|---|---|
| Data Name | FIMPORT_DATA | Date Created | 18Apr2023:22:54:26 | Data Size | 132096 |
| Data Type | DATA | Date Modified | 18Apr2023:22:54:26 | Role | TRAIN |
| Data Label | | Number Rows | 1745 | Segment | |
| Engine | V9 | Number Columns | 7 | Data Library | EMWS2 |

## Node=File Import
## Variables List

| Name | Label | Role | Level | Type | Length | Format | Creator |
|---|---|---|---|---|---|---|---|
| Class | | TARGET | ORDINAL | N | 8 | BEST12.0 | |
| buying | | INPUT | ORDINAL | N | 8 | BEST12.0 | |
| door | | INPUT | NOMINAL | N | 8 | BEST12.0 | |
| lug_boot | | INPUT | ORDINAL | N | 8 | BEST12.0 | |
| maint | | INPUT | ORDINAL | N | 8 | BEST12.0 | |
| persons | | INPUT | NOMINAL | N | 8 | BEST12.0 | |
| safety | | INPUT | ORDINAL | N | 8 | BEST12.0 | |

## Node=File Import
## Created Variables List

# SAS Enterprise Miner Report

## Node=StatExplore
## Summary

Node id = Stat
Node label = StatExplore
Meta path = FIMPORT => Stat
Notes =

## Node=StatExplore
## Properties

| Property | Value | Default | Property | Value | Default | Property | Value | Default |
|---|---|---|---|---|---|---|---|---|
| Component | StatExplore | | Correlation | Y | | NObs | 100000 | 1000000 |
| BySegment | N | Y | DropRejected | Y | | Pearson | Y | |
| ChiSquare | Y | | HideVariable | Y | | Spearman | N | |
| ChiSquareInterval | N | | IntervalDistribution | Y | | UseScore | N | |
| ChiSquareIntervalNBins | 5 | | LevelSummary | Y | | UseTest | N | |
| ClassDistribution | Y | | MaximumVars | 1000 | | UseValidate | N | |


## Node=StatExplore
## Variable Summary

| Role | Level | Frequency Count | Name |
|---|---|---|---|
| INPUT | NOMINAL | 2 | door persons |
| INPUT | ORDINAL | 4 | buying lug_boot maint safety |

| Target | Variable | Importance | Worth | Analysis Variable | Label | plot |
|---|---|---|---|---|---|---|
| Class | safety | 1 | 0.15480 | 1 | safety | . |
| Class | persons | 2 | 0.09979 | 1 | persons | . |
| Class | buying | 3 | 0.02428 | 1 | buying | . |
| Class | maint | 4 | 0.01890 | 1 | maint | . |
| Class | lug_boot | 5 | 0.00855 | 1 | lug_boot | . |
| Class | door | 6 | 0.00226 | 1 | door | . |

| Data Role | Segment | Segment Id | Segment Name:Value | Target | Input | Cramer's V | Prob | Chi-Square | Df | Role | Label | Ordered Inputs | Group | Plot |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| TRAIN | | | _OVERALL_ | Class | safety | 0.56511 | <.0001 | 2229.0380 | 60 | INPUT | safety | 1 | 1 | 1 |
| TRAIN | | | _OVERALL_ | Class | persons | 0.55111 | <.0001 | 2119.9899 | 56 | INPUT | persons | 2 | 2 | 1 |
| TRAIN | | | _OVERALL_ | Class | door | 0.50150 | <.0001 | 1755.4869 | 60 | INPUT | door | 3 | 3 | 1 |
| TRAIN | | | _OVERALL_ | Class | lug_boot | 0.47755 | <.0001 | 1591.8134 | 48 | INPUT | lug_boot | 4 | 4 | 1 |
| TRAIN | | | _OVERALL_ | Class | buying | 0.33900 | <.0001 | 802.1508 | 16 | INPUT | buying | 5 | 5 | 1 |
| TRAIN | | | _OVERALL_ | Class | maint | 0.32913 | <.0001 | 756.1272 | 16 | INPUT | maint | 6 | 6 | 1 |

SAS Enterprise Miner Report
Node=StatExplore
Class Variables
TARGET='Class' and PLOT=1

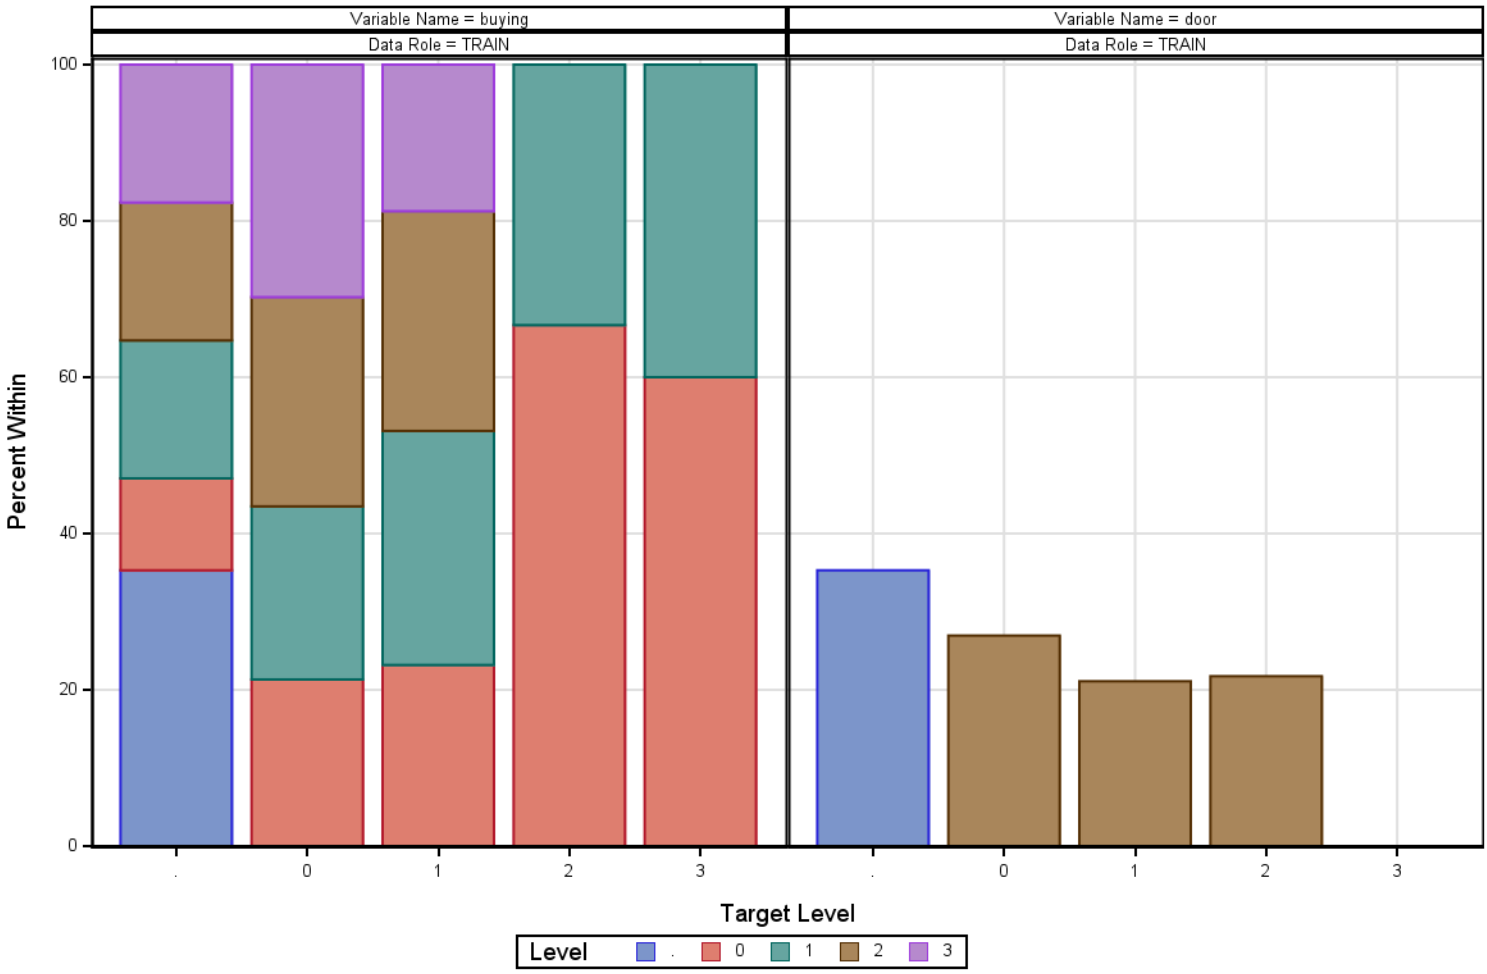

# SAS Enterprise Miner Report

## Node=Data Partition
## Summary

Node id = Part
Node label = Data Partition
Meta path = FIMPORT => Stat => Part
Notes =

## Node=Data Partition
## Properties

| Property | Value | Default | Property | Value | Default | Property | Value | Default |
|---|---|---|---|---|---|---|---|---|
| Component | Partition | | Method | DEFAULT | | TestPct | 30 | |
| ClassDistribution | Y | | OutputType | DATA | | TrainPct | 70 | 40 |
| IntervalDistribution | Y | | RandomSeed | 12345 | | ValidatePct | 0 | 30 |

## Node=Data Partition
## Variable Summary

| Role | Level | Frequency Count | Name |
|---|---|---|---|
| TARGET | ORDINAL | 1 | Class |
| INPUT | NOMINAL | 2 | door persons |
| INPUT | ORDINAL | 4 | buying lug_boot maint safety |

# SAS Enterprise Miner Report

## Node=Replacement
## Summary

Node id = Repl
Node label = Replacement
Meta path = FIMPORT => Stat => Part => Repl
Notes =

## Node=Replacement
## Properties

| Property | Value | Default | Property | Value | Default | Property | Value | Default |
|---|---|---|---|---|---|---|---|---|
| Component | Replace | | IntervalMethod | NONE | | SpacingsCutoff | 9.0 | 9 |
| CalcMethod | STDDEV | | MADSCutoff | 9.0 | 9 | StddevCutoff | 3.0 | 3 |
| CountReport | Y | | PercentsCutoff | 0.5 | | UnknownLevel | NONE | MODE |
| HideVariable | N | | ReplaceMethod | COMPUTED | | | | |

## Node=Replacement
## Variable Summary

| Role | Level | Frequency Count | Name |
|---|---|---|---|
| INPUT | NOMINAL | 2 | door persons |
| INPUT | ORDINAL | 4 | buying lug_boot maint safety |

# SAS Enterprise Miner Report

## Node=Decision Tree
## Summary

Node id = Tree
Node label = Decision Tree
Meta path = FIMPORT => Stat => Part => Repl => Tree
Notes =

## Node=Decision Tree
## Properties

| Property | Value | Default | Property | Value | Default | Property | Value | Default |
|---|---|---|---|---|---|---|---|---|
| Component | DecisionTree | | Kass | Y | | Pred | N | |
| AVG | Y | | KassApply | BEFORE | | Predict | Y | |
| AssessMeasure | PROFIT/LOSS | | LeafSize | 5 | | ProfitLoss | NONE | |
| AssessPercentage | 0.25 | | Leafid | Y | | RASE | N | |
| CV | N | | Maxbranch | 2 | | SampleMethod | RANDOM | |
| CVNIter | 10 | | Maxdepth | 6 | | SampleSeed | 12345 | |
| CVRepeat | 1 | | MinCatSize | 5 | | SampleSize | 10000 | |
| CVSeed | 12345 | | MissingValue | USEINSEARCH | | ShowNodeId | Y | |
| ClassColorBy | PERCENTCORRECT | | NSubtree | 1 | | ShowValid | Y | |
| Count | Y | | NodeRole | SEGMENT | | SigLevel | 0.2 | |
| CreateSample | DEFAULT | | NodeSample | 20000 | | SplitPrecision | 4 | |
| Criterion | DEFAULT | | NominalCriterion | PROBCHISQ | | Splitsize | . | |
| Depth | Y | | Nrules | 5 | | Subtree | ASSESSMENT | |
| Dummy | N | | Nsurrs | 0 | | Target | ALL | |
| Exhaustive | 5000 | | NumInputs | 1 | | ToolType | MODEL | |
| Freeze | N | | NumSingleImp | 5 | | TrainMode | BATCH | |
| ImportModel | N | | ObsImportance | N | | UseDecision | N | |
| ImportedTreeData | | | OrdinalCriterion | ENTROPY | | UseMultipleTarget | N | |
| Inputs | N | | PercentCorrect | N | | UsePriors | N | |
| IntColorBy | AVG | | Performance | DISK | | UseVarOnce | N | |
| IntervalCriterion | PROBF | | Precision | 4 | | VarSelection | Y | |


## Node=Decision Tree
## Variable Summary

| Role | Level | Frequency Count | Name |
|---|---|---|---|
| TARGET | ORDINAL | 1 | Class |
| INPUT | NOMINAL | 2 | door persons |
| INPUT | ORDINAL | 4 | buying lug_boot maint safety |
| ID | INTERVAL | 1 | _dataobs_ |


## Node=Decision Tree
## Model Fit Statistics

Target=Class Target Label=' '


| Label of Statistic | Train | Validation | Test |
|---|---|---|---|
| Sum of Frequencies | 1207.00 | . | 521.00 |
| Misclassification Rate | 0.08 | . | 0.09 |
| Maximum Absolute Error | 0.96 | . | 1.00 |
| Sum of Squared Errors | 127.53 | . | 58.95 |
| Average Squared Error | 0.03 | . | 0.03 |
| Root Average Squared Error | 0.16 | . | 0.17 |
| Divisor for ASE | 4828.00 | . | 2084.00 |
| Total Degrees of Freedom | 3621.00 | . | . |

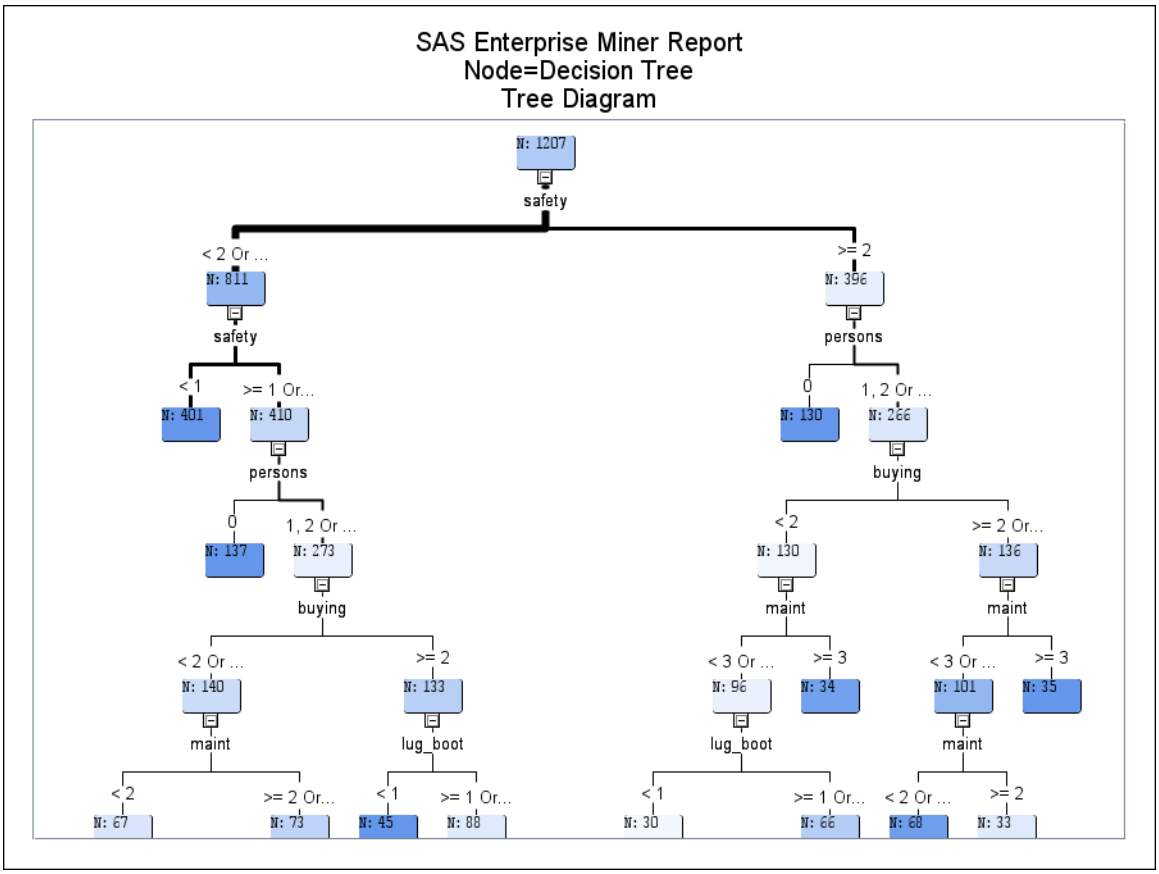



SAS Enterprise Miner Report
Node=Decision Tree
Treemap

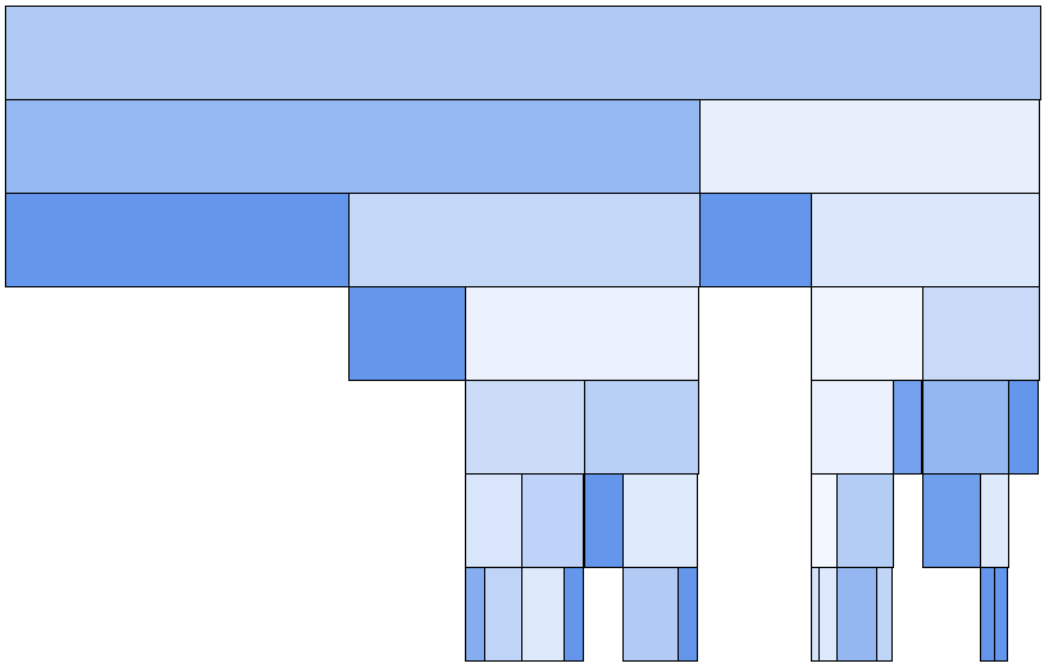



SAS Enterprise Miner Report
Node=Decision Tree
Model Iteration Plots

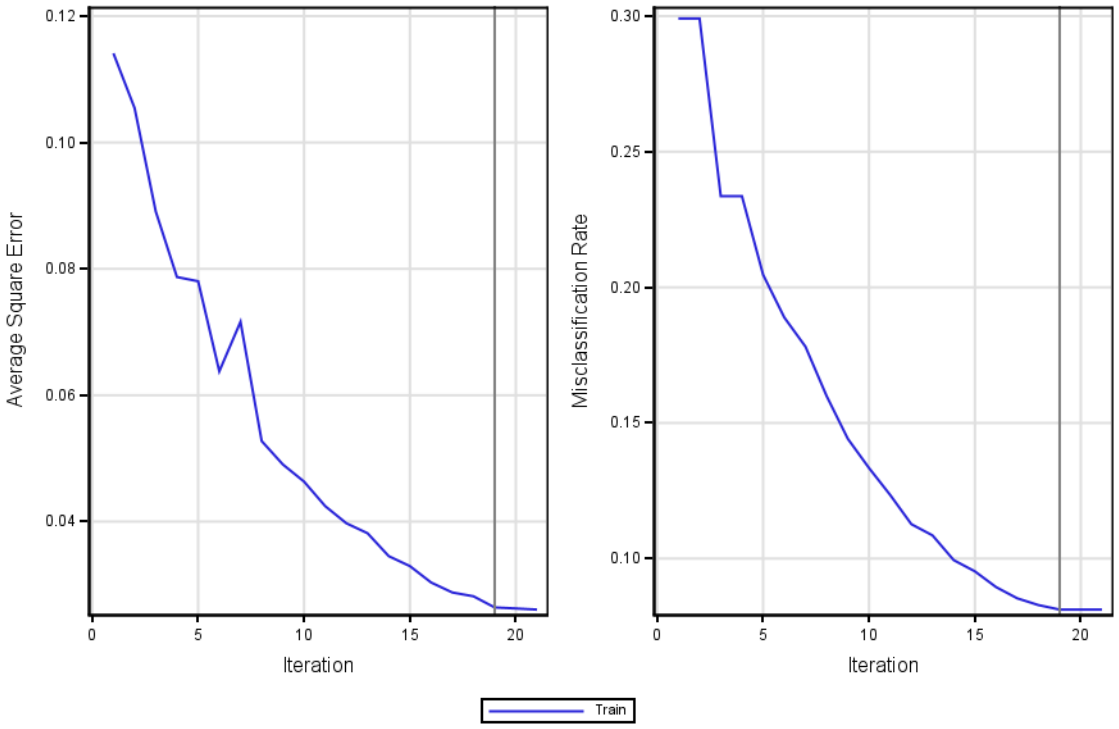


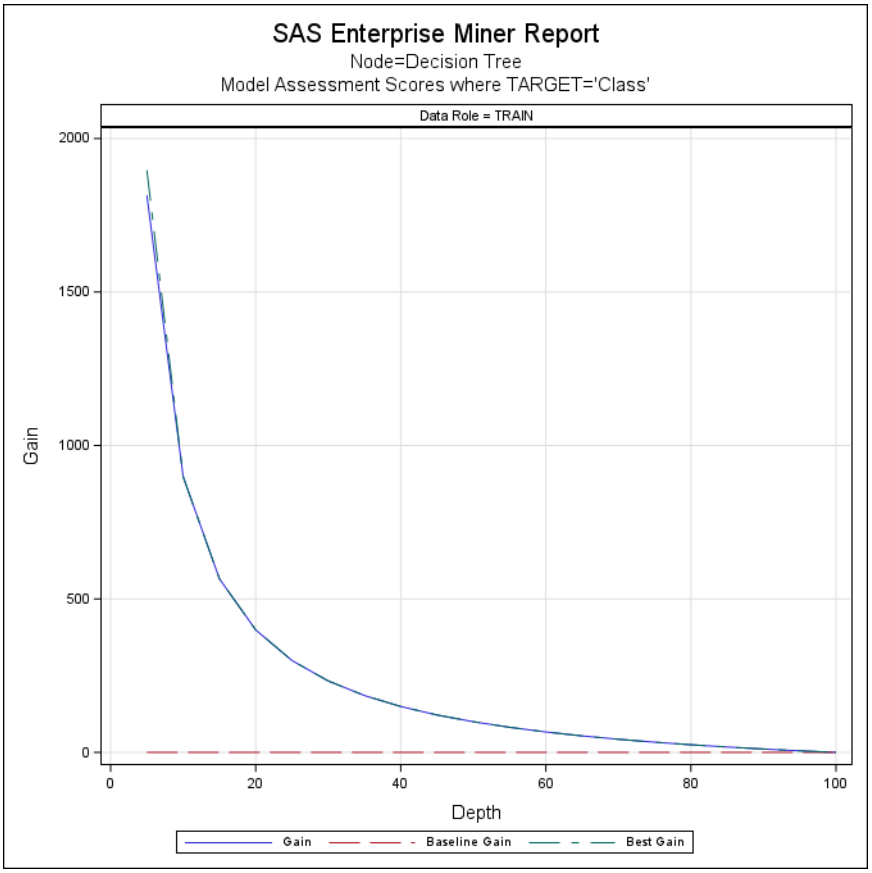
SAS Enterprise Miner Report
Node=Decision Tree
Model Assessment Scores where TARGET='Class'
Data Role = TRAIN
Gain
2000
1500
1000
500
0
0
20
40
60
80
100
Depth
Gain
Baseline Gain
Best Gain

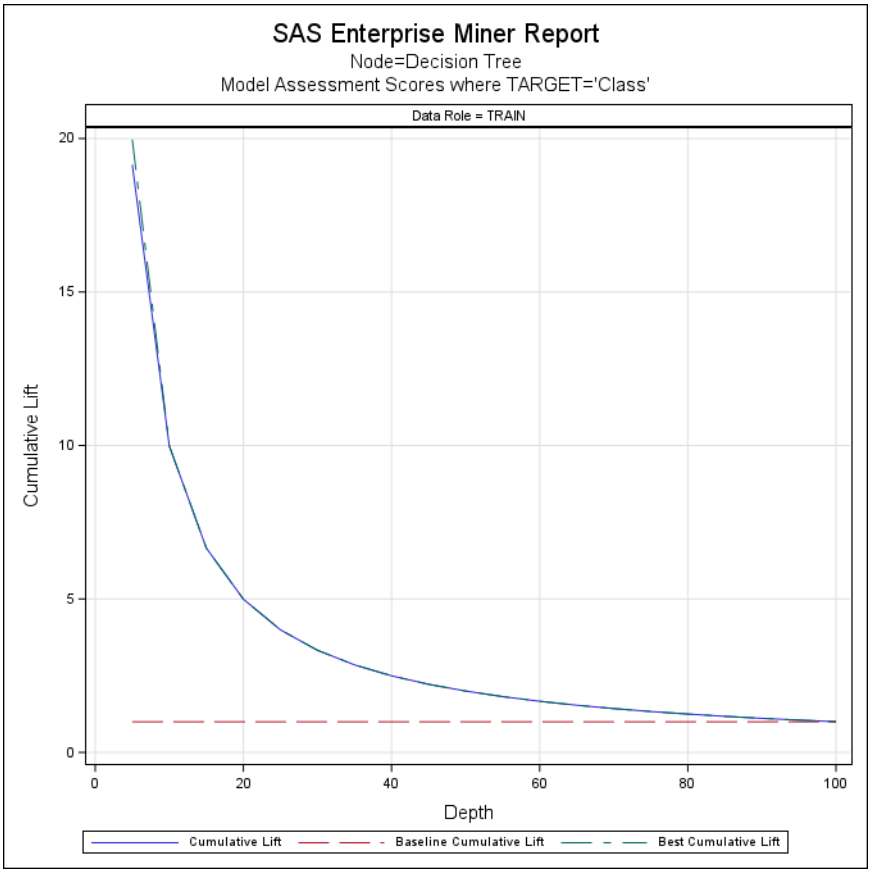
SAS Enterprise Miner Report
Node=Decision Tree
Model Assessment Scores where TARGET='Class'
Data Role = TRAIN
Cumulative Lift
20
15
10
5
0
0
20
40
60
80
100
Depth
Cumulative Lift
Baseline Cumulative Lift
Best Cumulative Lift

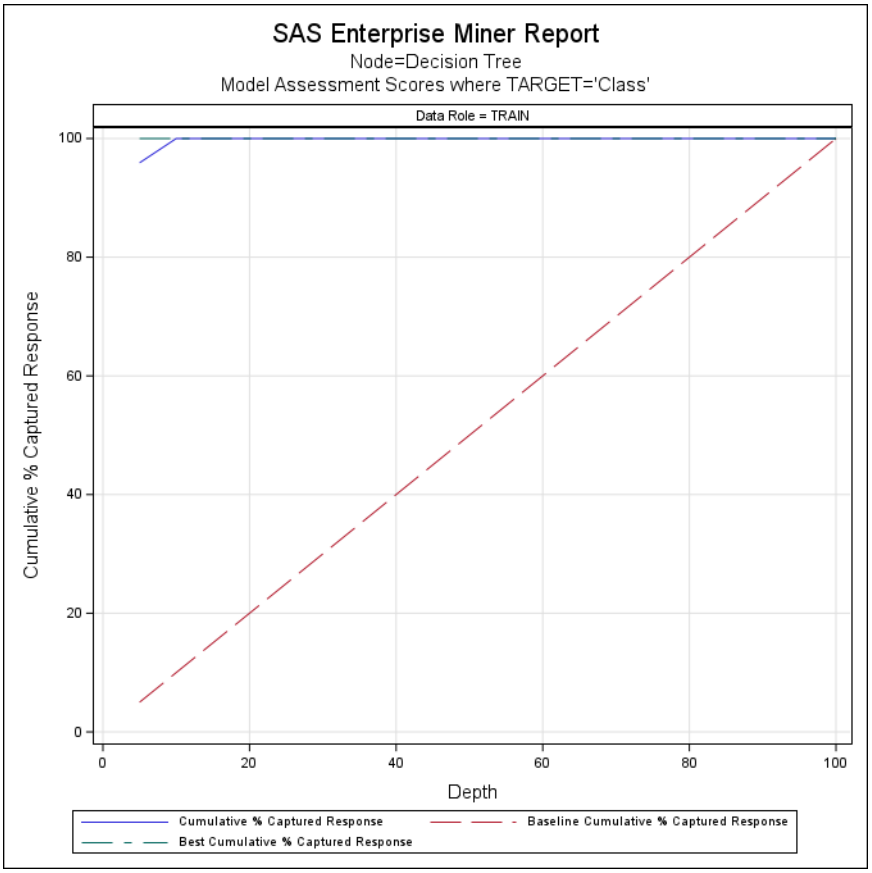
SAS Enterprise Miner Report
Node=Decision Tree
Model Assessment Scores where TARGET='Class'
Data Role = TRAIN
Cumulative % Captured Response
Depth
0
20
40
60
80
100
Cumulative % Captured Response
Baseline Cumulative % Captured Response
Best Cumulative % Captured Response

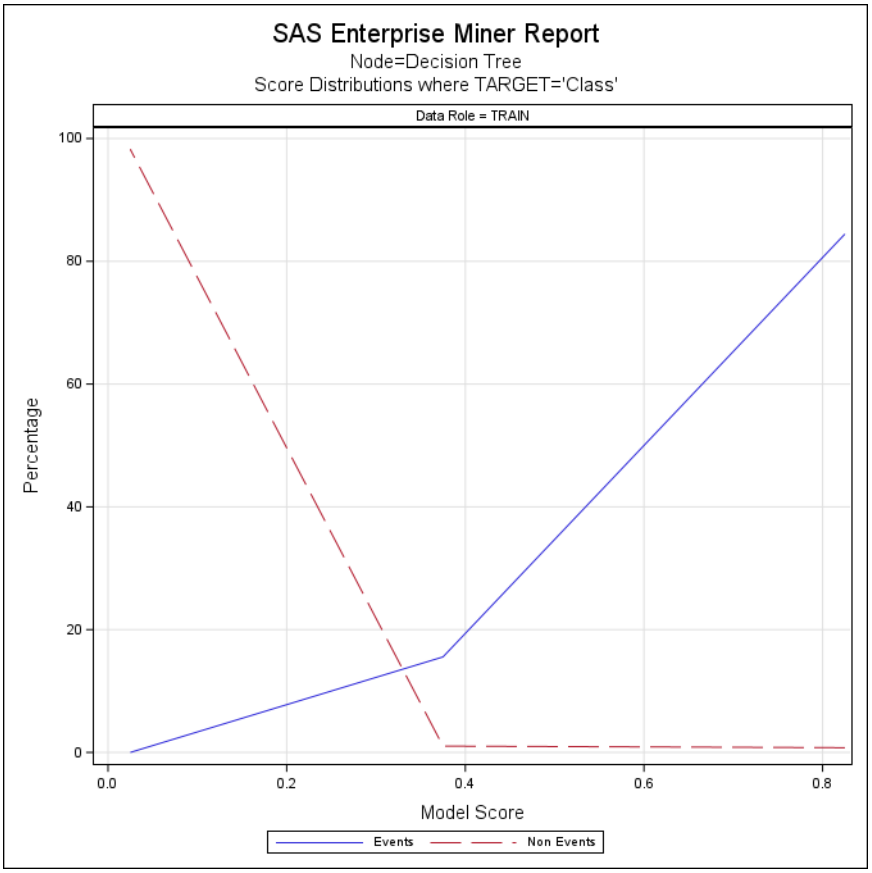
SAS Enterprise Miner Report
Node=Decision Tree
Score Distributions where TARGET='Class'
Data Role = TRAIN
Percentage
Model Score
0.0
0.2
0.4
0.6
0.8
Events
Non Events

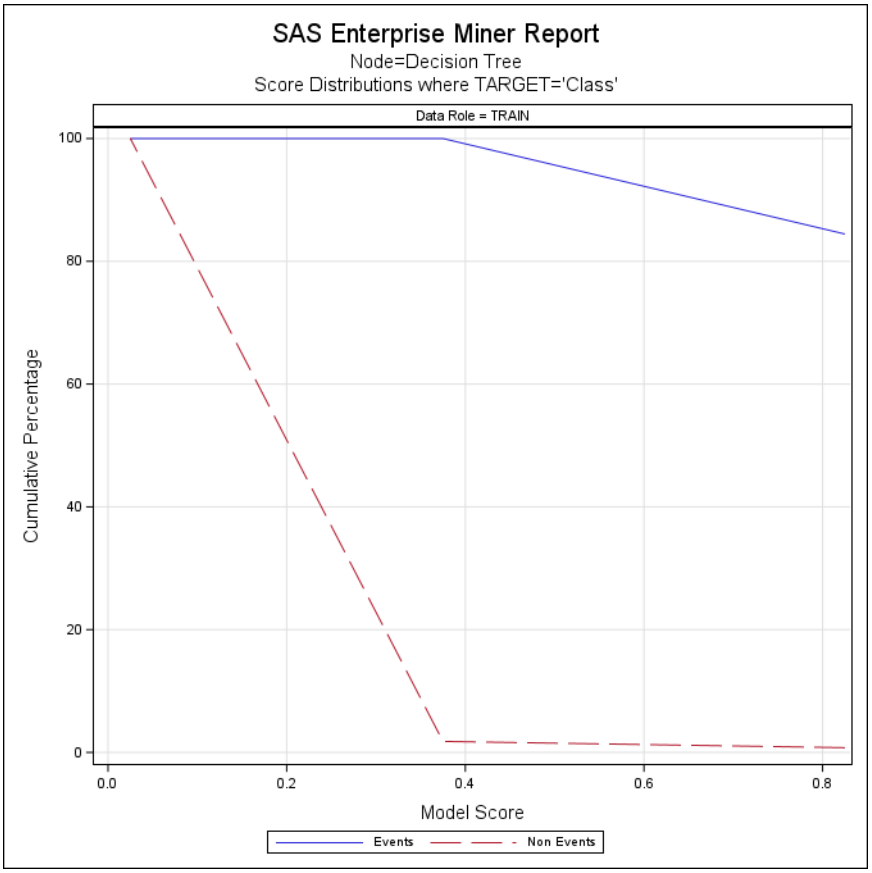


## Node=Decision Tree
## Score Distributions

Target Variable=Class Data Role=TRAIN

| Posterior Probability Range | Number of Events | Percentage of Events | Percentage of Nonevents | Cumulative Percentage of Events | Cumulative Percentage of Nonevents |
|---|---|---|---|---|---|
| 0.80-0.85 | 38 | 84.4444 | 0.7673 | 84.444 | 0.767 |
| 0.35-0.40 | 7 | 15.5556 | 1.0230 | 100.000 | 1.790 |
| 0.00-0.05 | 0 | 0.0000 | 98.2097 | 100.000 | 100.000 |

End of Report