



The journey

you've taken



Module 1: Environment setup (25 minutes)

You started by preparing your development environment, installing Python, creating a virtual environment, installing ADK, and configuring API keys. You learned the correct setup sequence and verified everything worked by creating and running your first agent with `adk create` and `adk web`.

Key concepts mastered:

- Installing ADK with `pip install google-adk`
- Creating virtual environments for Python projects
- Configuring `.env` files with `GOOGLE_API_KEY` after running `adk create`
- Understanding the generated file structure: `agent.py`, `__init__.py`, and `.env`
- Verifying setup with `adk web`

Module 2: Understanding your first agent (20 minutes)

You learned the four core parameters that define every agent—`model`, `name`, `description`, and `instruction`. You transformed the default agent into a specialized math tutor by customizing its instruction and discovered the difference between description (for other agents) and instruction (for this agent's behavior).

Key concepts mastered:

- Four core parameters: model, name, description, and instruction
- The `root_agent` variable convention that ADK tools look for
- Writing effective instructions that define agent personality and behavior
- Understanding when to use `description` versus `instruction`
- Testing agents with `adk web`



Module 3: Other ways to run your agent (15 minutes)

You mastered three different ways to run agents beyond the web interface—terminal execution with `adk run`, REST API deployment with `adk api_server`, and programmatic execution in Python code. Each method serves different needs, from quick testing to production integration.

Key concepts mastered:

- `adk run` for terminal-based quick testing
- `adk api_server` for deploying agents as REST APIs
- Programmatic execution using Runner, sessions, and async event loops
- When to use each execution method
- Running from agent directory versus parent directory

Module 4: Agent configuration with YAML (15 minutes)

You explored a second way to define agents using YAML configuration files instead of Python code. You learned that `adk create --type=config` generates a `root_agent.yaml` file, making agent creation accessible to non-programmers. You discovered when to use YAML (simple agents and quick prototyping) versus Python code (complex multi-agent systems and custom tools).

Key concepts mastered:

- Creating YAML-based agents with `adk create --type=config`
- Writing agent configurations in YAML format
- Understanding that YAML agent config is Python-only
- Knowing when to use YAML versus Python for agent definition
- Running YAML agents the same way as Python agents

What you can do now

With the skills from this course, you can:

- 1 Create custom agents for any purpose—tutors, assistants, or creative writers
- 2 Run agents multiple ways depending on your needs—web UI, terminal, API, or programmatically
- 3 Define agents in Python or YAML based on your preference and use case
- 4 Build agent-powered applications using the Runner pattern with sessions

Key takeaways to remember

As you move forward, keep these truths in mind:

- 1 **Four core parameters:** Every agent needs a model, name, description, and instruction
- 2 **Instruction is critical:** This parameter defines how your agent behaves and interacts
- 3 **Multiple execution methods:** Choose `adk web` for development, `adk run` for quick tests, `adk api_server` for APIs, or programmatic execution for custom apps
- 4 **Python or YAML:** Use YAML for simplicity and accessibility, and Python for complex systems
- 5 **Environment configuration matters:** Always configure `.env` with `GOOGLE_API_KEY` after `adk create`

Community and support

Primary references

- [ADK documentation](#): Official ADK reference
- [ADK Python Quickstart](#): Getting started guide
- [Agent Config documentation](#): YAML configuration reference

Resources

From Google

Codelab: Building AI agents with ADK: The foundation

A hands-on codelab for foundational agent building skills

From the community

Video: Google Cloud Agent Development Kit tutorial | Build your first ADK agent:

A beginner-friendly walkthrough on building your own agents

Article: Chapter 1 – Introduction to AI agents and the Agent Development Kit (ADK):

A written deep dive on building AI agents

Video: Google AI community training: Getting started with Google Agent Development Kit:

A full walkthrough training on the Google ADK

Course: Hands-on AI: Building agents with the Google Agent Development Toolkit (ADK):

A LinkedIn learning course on building AI agents hands-on

Build your first AI Agent with ADK – Agent Development Kit by Google:

A step-by-step tutorial covering environment setup and creating your first conversational agent

Use your ADK AI agent in a UI:

How to integrate your agent into a web UI with practical code examples

Your First ADK agent: Building a Google Tasks to-do manager:

A practical example of building a real-world agent with OAuth authentication


Building and deploying AI agents in minutes with Google's ADK – Part 1:

A complete walkthrough from setup to deployment, covering multiple execution methods

Building and deploying a Python ADK agent from the Google Cloud Shell:

A written article exploring alternative environment setup using Cloud Shell instead of local installation

② Questions? Post questions in the [community forum](#).

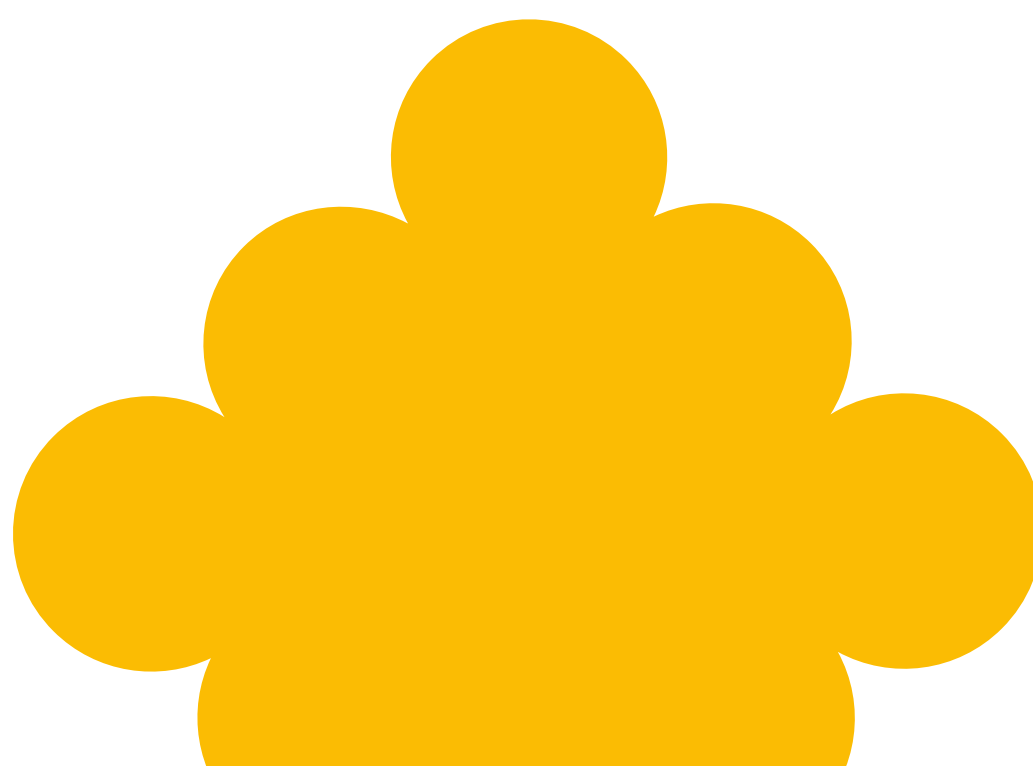

Quick reference card

Essential commands

Shell

Environment Setup

python3 -m venv adk-env

source adk-env/bin/activate

adk-env\Scripts\activate

pip install google-adk

Create virtual environment

Activate (macOS/Linux)

Activate (Windows)

Install ADK

Create Agents

adk create my_agent

adk create --type=config my_agent

Create Python-based agent

Create YAML-based agent

Run Agents

adk web

adk web my_agent

adk run

adk api_server

Web interface (from agent dir)

Web interface (from parent dir)

Terminal execution

REST API server

Python-based agent pattern

Python

```
from google.adk.agents.llm_agent import Agent
```

```
root_agent = Agent(
    model='gemini-2.5-flash',
    name='math_tutor_agent',
    description='Helps students learn algebra by guiding them through problem-solving steps.',
    instruction="""You are a patient and encouraging algebra tutor.
```

Your teaching approach:

1. When a student asks a question, first understand what they're struggling with
2. Break down the problem into smaller, manageable steps
3. Guide them to discover the answer rather than giving it directly
4. Provide positive reinforcement for effort and progress
5. Use simple language and avoid jargon

Always maintain a supportive, patient tone."""

```
)
```



YAML-based agent pattern

None

```
# root_agent.yaml
name: math_tutor_agent
model: gemini-2.5-flash
description: Helps students learn algebra by guiding them through problem-solving steps.
instruction: |
  You are a patient and encouraging algebra tutor.

  Your teaching approach:
  1. When a student asks a question, first understand what they're struggling with
  2. Break down the problem into smaller, manageable steps
  3. Guide them to discover the answer rather than giving it directly
  4. Provide positive reinforcement for effort and progress
  5. Use simple language and avoid jargon
  Always maintain a supportive, patient tone.
```


Programmatic execution pattern

Python

```
import asyncio
from google.adk.agents.llm_agent import Agent
from google.adk.runners import Runner
from google.adk.sessions import InMemorySessionService
from google.genai.types import Content, Part

# Create agent
agent = Agent(
    model='gemini-2.5-flash',
    name='math_tutor',
    instruction='You are a patient math tutor.'
)

# Set up runner
session_service = InMemorySessionService()
runner = Runner(
    agent=agent,
    app_name='my_app',
    session_service=session_service
)
```

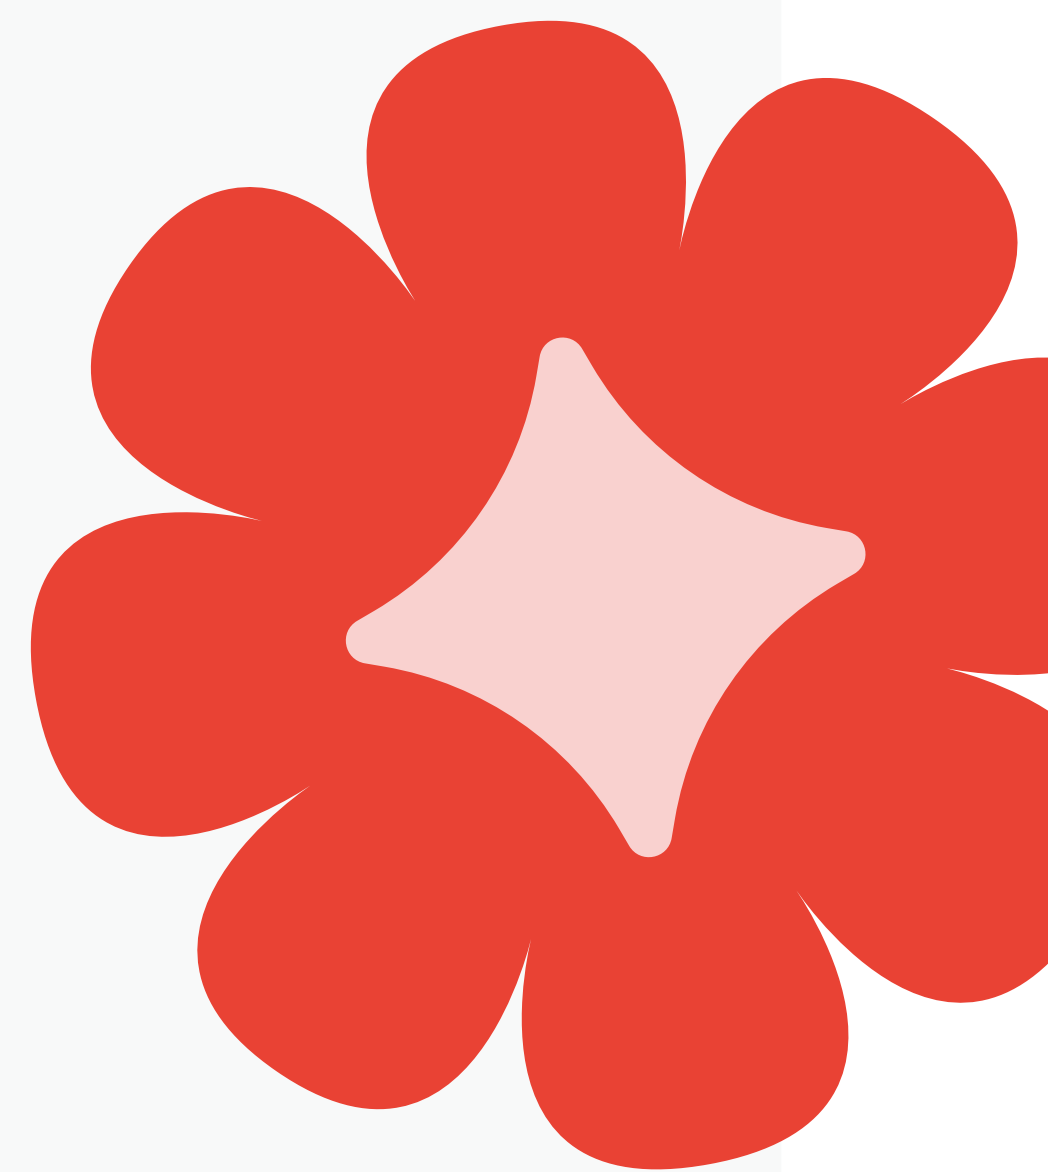


```
# Run agent
async def run_agent():
    session = await session_service.create_session(
        app_name='my_app',
        user_id='user_1',
        session_id='session_1'
    )

    user_message = Content(
        role='user',
        parts=[Part(text='How do I solve 2x + 5 = 13?')]
    )

    async for event in runner.run_async(
        user_id='user_1',
        session_id='session_1',
        new_message=user_message
    ):
        if event.is_final_response() and event.content and event.content.parts:
            print(event.content.parts[0].text)

# Execute
asyncio.run(run_agent())
```

