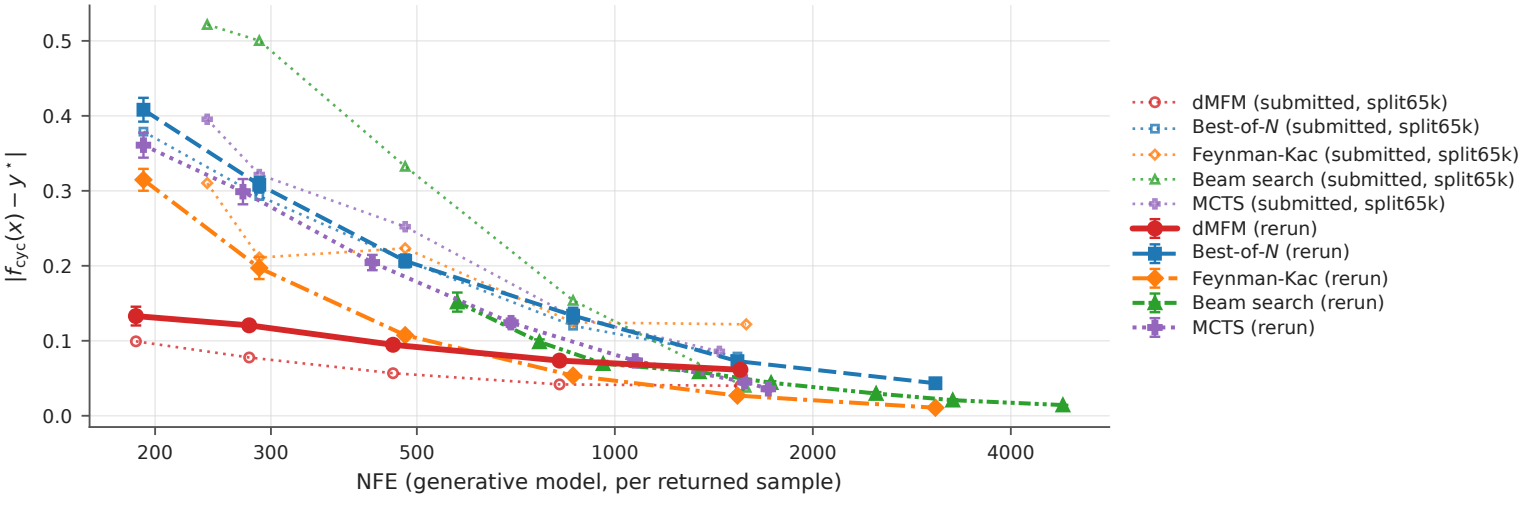
submitted (dotted, purged split65k models) vs rerun (solid, parent-disjoint)
$|f_{\mathrm{cyc}}(x) - y^\star|$
0.0
0.1
0.2
0.3
0.4
0.5
200
300
500
1000
2000
4000
NFE (generative model, per returned sample)
dMFM (submitted, split65k)
Best-of-N (submitted, split65k)
Feynman-Kac (submitted, split65k)
Beam search (submitted, split65k)
MCTS (submitted, split65k)
dMFM (rerun)
Best-of-N (rerun)
Feynman-Kac (rerun)
Beam search (rerun)
MCTS (rerun)