PlanarCityLoc: Breaking Silhouette Ambiguity in LoD Aerial Localization via 3D Planes

Oussema Dhaouadi[1,2,4,5,6] Shao Jie Hu Chen[1,2] Jakob Gollreiter[1,2] Samir Jusufi[1,3] Nikolas Rieger[1,2,9] Caroline Wendlandt[1,2]
Christian Wender[1,7] Jingfeng Mao[2,4] Guangming Wang[4] Zuria Bauer[5] Marc Pollefeys[5,8] Daniel Cremers[2,6] Olaf Wysocki[4]

[1] TUM.ai [2] Technical University of Munich [3] LMU Munich [4] University of Cambridge [5] ETH Zürich [6] MCML [7] BMW Group [8] Microsoft [9] Konrad Zuse School of Excellence in Reliable AI (relAI)


WACV JAN 4–8 2027 Orlando, Florida

TL;DR

We present PlanarCityLoc to locate a drone in a 3D city map: building outlines alone can fit different viewpoints. 3D planes help resolve this silhouette ambiguity; our results improve recall over off-the-shelf outline matching.

Goal & motivation

Goal: 6-DoF UAV localization in LoD maps

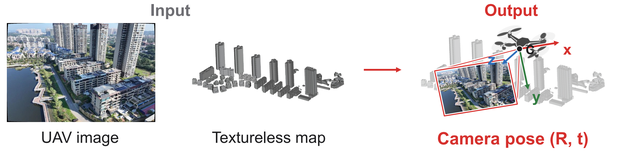

+ intrinsics and a coarse GPS/IMU prior


Why? Reliable positioning for UAV applications




Urban mapping | Building inspection | Urban navigation

Application illustrations

Limitation: silhouette ambiguity in LoD-Loc v2 [3] and LoD-Loc v3 [4]



Symmetric block · schematic



Illustrative optimization landscape

Different poses can share the same mask.
Mask overlap supplies no 3D matches.
Disjoint masks also give flat scores.

Contributions & takeaway

1. **Planar grounding**
   3D map patches ↔ 2D image regions.
2. **Geometry-aware pose search**
   Masks, edges and depth guide initialization.
3. **Off-the-shelf visual models**
   No dataset-specific model fine-tuning.

Address silhouette ambiguity through 3D plane grounding.

Method


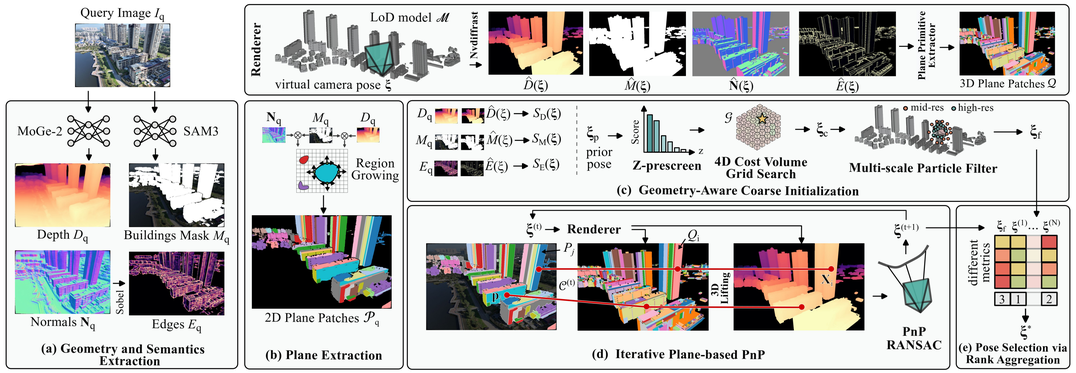


Image cues: SAM 3 [6] and MoGe-2 ViT-S [7]. Robust refinement: plane-based PnP–RANSAC [13].

Qualitative localization

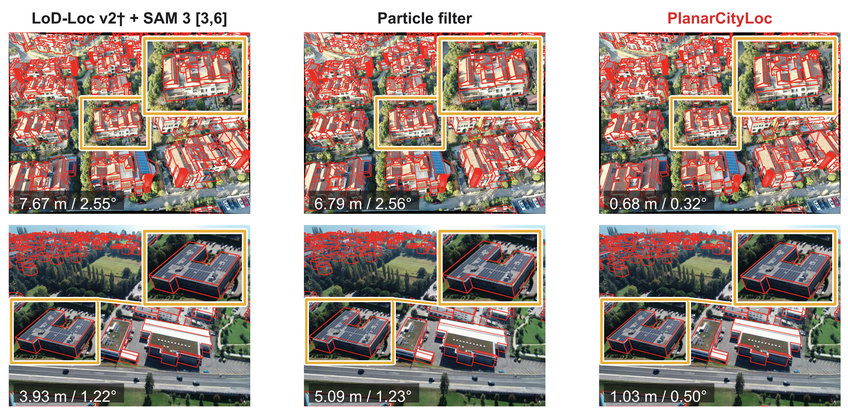

Red: projected LoD edges. Labels: translation / rotation error.

Localization recall

Joint recall at 2 m / 2° (%) ↑

	UAVD4L-LoDv2 [1,3]		Swiss-EPFL-v2 [3,9–11]	
Method	**in-Traj.**	**out-Traj.**	**in-Place**	**out-Place**
Trainable methods				
LoD-Loc · trained [2]	49.6	54.2	36.8	14.2
LoD-Loc v2† · oracle GT [3]	**57.2**	**64.9**	**74.9**	**43.3**
LoD-Loc v3† · oracle GT [4]	54.5	41.3	56.3	40.1
Off-the-shelf methods				
MC-Loc · DINOv2 [5,12]	1.2	2.4	0.9	2.9
LoD-Loc v2† · SAM 3 [3,6]	35.7	64.3	9.4	17.4
Cost volume (ours)	27.6	34.9	15.4	11.3
+ particle filter (ours)	36.0	60.8	**24.9**	14.5
PlanarCityLoc	**75.4**	**80.6**	20.6	**48.5**

† Adapted re-runs: GT = oracle masks (not trained predictions); SAM 3 = off-the-shelf predictions.
LoD-Loc [2]: published trained result. Map/search setups differ. Published trained v2/v3 results: see paper.
Bold/underline: best/second within oracle or off-the-shelf runs, not across setups.

Pose accuracy


Split	3 m / 3° ↑	5 m / 5° ↑	T.e. (m) ↓	R.e. (°) ↓
UAV · in-Traj.	90.8	97.2	1.28	0.68
UAV · out-Traj.	95.1	99.0	1.26	0.69
Swiss · in-Place	39.0	59.7	3.70	1.90
Swiss · out-Place	72.3	89.4	1.98	1.21

PlanarCityLoc: recall (%) and median translation / rotation errors.

Ablations

Map detail improves pose accuracy

UAVD4L [1,3] · recall at 2 m / 2° (%)



Depth and normals matter

Depth + normal predictor	in-Traj.	out-of-Traj.
Metric3D v2 · ViT-S [8]	33.0	55.0
MoGe-2 · ViT-S [7]	**75.0**	**84.0**

Geometry: 100 queries/split, SAM 3 [6] fixed. Map detail: full splits.

[1] Wu et al. UAVD4L: A Large-Scale Dataset for UAV 6-DoF Localization. 3DV, 2024.
[2] Zhu et al. LoD-Loc: Aerial Visual Localization using LoD 3D Map with Neural Wireframe Alignment. NeurIPS, 2024.
[3] Zhu et al. LoD-Loc v2: Aerial Visual Localization over Low Level-of-Detail City Models using Explicit Silhouette Alignment. ICCV, 2025.
[4] Peng et al. LoD-Loc v3: Generalized Aerial Localization in Dense Cities Using Instance Silhouette Alignment. CVPR, 2026.
[5] Trivigno et al. The Unreasonable Effectiveness of Pre-Trained Features for Camera Pose Refinement. CVPR, 2024.
[6] Carion et al. SAM 3: Segment Anything with Concepts. ICLR, 2026.
[7] Wang et al. MoGe-2: Accurate Monocular Geometry with Metric Scale and Sharp Details. NeurIPS, 2025.
[8] Hu et al. Metric3D v2: A Versatile Monocular Geometric Foundation Model for Zero-Shot Metric Depth and Surface Normal Estimation. TPAMI, 2024.
[9] Yan et al. CrossLoc: Scalable Aerial Localization Assisted by Multimodal Synthetic Data. CVPR, 2022.
[10] Doytchinov et al. CrossLoc Benchmark Datasets. Dryad, 2022. doi:10.5061/dryad.mgpnk991c.
[11] © swisstopo. swissBUILDINGS3D 3.0 Beta. Swiss LoD city-map geodata.
[12] Oquab et al. DINOv2: Learning Robust Visual Features without Supervision. TMLR, 2024.
[13] Fischler & Bolles. Random Sample Consensus. Communications of the ACM, 1981.

Application illustrations: AI-generated. All scientific figures and results use the paper's recorded sources.