# ETSI TS 132 645 V5.6.0 (2004-09)

Technical Specification

Universal Mobile Telecommunications System (UMTS);

**Telecommunication management;** 


**Configuration Management (CM);** 

**UTRAN** network resources Integration Reference Point (IRP):

**Bulk CM eXtensible Markup Language (XML)** 

file format definition

(3GPP TS 32.645 version 5.6.0 Release 5)

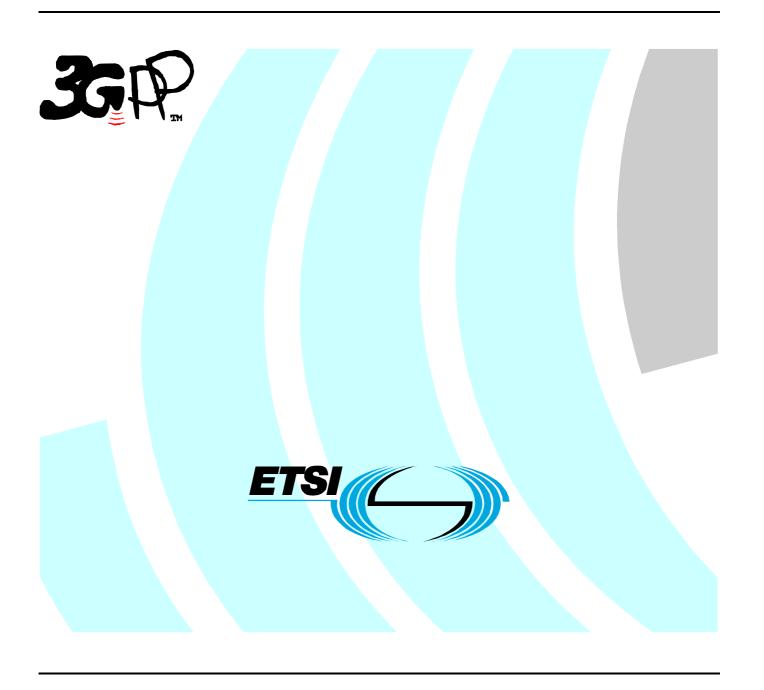

Reference
RTS/TSGS-0532645v560

Keywords

UMTS

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="http://portal.etsi.org/tb/status/status.asp">http://portal.etsi.org/tb/status/status.asp</a></a>

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI\_support.asp

#### **Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup> and **UMTS**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**<sup>TM</sup> and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

#### Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

### Contents

Intel	lectual Property Rights		2			
Intro	duction		4			
1	Scope		6			
2	References		6			
3 3.1		eviations				
3.2						
4	Structure and content of configuration data XML files					
Ann	ex A (normative):	Configuration data file NRM-specific XML schema				
		(file name "utranNrm.xsd")	9			
Annex B (informative):		XML schema electronic files				
Annex C (informative):		Change history	16			
Hiet	orv		17			

#### **Foreword**

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

#### Introduction

The present document is part of the 32.64x-series covering the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; Configuration Management (CM), as identified below:

32.645:	"UTRAN network resources Integration Reference Point (IRP): Bulk CM eXtensible Markup Language (XML) file format definition".
32.644:	"UTRAN network resources Integration Reference Point (IRP): Common Management Information Protocol (CMIP) Solution Set (SS)".
32.643:	"UTRAN network resources Integration Reference Point (IRP): Common Object Request Broker Architecture (CORBA) Solution Set (SS)".
32.642:	"UTRAN network resources Integration Reference Point (IRP): Network Resource Model (NRM)".
32.641:	"UTRAN network resources Integration Reference Point (IRP): Requirements".

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and Network Resources (NRs), and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

Due to the number of specifications defining Network Resource Models (NRMs) for Configuration Management as well as their expected growth in size from Release 5 onwards, a new structure of specifications is already needed in Release 5 for the definition of the XML file formats for the Bulk CM IRP (in Release 4 solely defined in 3GPP TS 32.615 [3]). This structure is needed to enable independent development and release for CM NRMs and corresponding NRM-specific parts of the Bulk CM XML file format definition, from each other and from the non NRM-specific part of the Bulk CM XML file format definition.

Table 1: Cross-3GPP-Releases specification structure for Bulk CM IRP XML file format definition

3GPP Rel-4	3GPP Rel-5	TS no.	TS title
New	Yes	32.615	Bulk Configuration Management IRP: XML File Format Definition
	New	32.625	Generic network resources IRP: Bulk CM XML file format definition
	New	32.635	Core network resources IRP: Bulk CM XML file format definition
	New	32.645	UTRAN network resources IRP: Bulk CM XML file format definition
	New	32.655	GERAN network resources IRP: Bulk CM XML file format definition

#### 1 Scope

The present document provides the NRM-specific part related to the UTRAN Network Resources IRP NRM [1] of the XML file format definition for the Bulk Configuration Management IRP IS [2].

The main part of this XML file format definition is provided by 3GPP TS 32.615 [3].

Bulk CM XML file formats are based on XML [4], XML Schema [5] [6] [7] and XML Namespace [8] standards.

This File Format Definition specification is related to 3GPP TS 32.642 (V5.5.X).

#### 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TS 32.642: "Telecommunication management; Configuration Management (CM); UTRAN network resources Integration Reference Point (IRP): Network Resource Models (NRM)".
   [2] 3GPP TS 32.612: "Telecommunication management; Configuration Management (CM); Bulk CM Integration Reference Point (IRP); Information Service (IS)".
- [3] 3GPP TS 32.615: "Telecommunication management; Configuration Management (CM); Bulk CM Integration Reference Point (IRP); eXtensible Markup Language (XML) file format definition".
- [4] W3C REC-xml-20001006: "Extensible Markup Language (XML) 1.0 (Second Edition)".
- [5] W3C REC-xmlschema-0-20010502: "XML Schema Part 0: Primer".
- [6] W3C REC-xmlschema-1-20010502: "XML Schema Part 1: Structures".
- [7] W3C REC-xmlschema-2-20010502: "XML Schema Part 2: Datatypes".
- [8] W3C REC-xml-names-19990114: "Namespaces in XML".

#### 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

XML file: file containing an XML document

XML document: composed of the succession of an optional XML declaration followed by a root XML element

NOTE: See [4]; in the scope of the present document.

XML declaration: it specifies the version of XML being used

NOTE: See [4].

**XML element:** has a type, is identified by a name, may have a set of XML attribute specifications and is either composed of the succession of an XML start-tag followed by the XML content of the XML element followed by an XML end-tag, or composed simply of an XML empty-element tag; each XML element may contain other XML elements

NOTE: See [4].

**empty XML element:** having an empty XML content; an empty XML element still possibly has a set of XML attribute specifications; an empty XML element is either composed of the succession of an XML start-tag directly followed by an XML end-tag, or composed simply of an XML empty-element tag

NOTE: See [4].

**XML content (of an XML element):** empty if the XML element is simply composed of an XML empty-element tag; otherwise the part, possibly empty, of the XML element between its XML start-tag and its XML end-tag

**XML start-tag:** the beginning of a non-empty XML element is marked by an XML start-tag containing the name and the set of XML attribute specifications of the XML element

NOTE: See [4].

XML end-tag: the end of a non-empty XML element is marked by an XML end-tag containing the name of the XML element

NOTE: See [4].

**XML empty-element tag:** composed simply of an empty-element tag containing the name and the set of XML attribute specifications of the XML element

NOTE: See [4].

XML attribute specification: has a name and a value

NOTE: See [4].

**DTD:** defines structure and content constraints to be respected by an XML document to be valid with regard to this DTD

NOTE: See [4].

XML schema: more powerful than a DTD, an XML schema defines structure and content constraints to be respected by an XML document to conform with this XML schema; through the use of XML namespaces several XML schemas can be used together by a single XML document; an XML schema is itself also an XML document that shall conform with the XML schema for XML schemas

NOTE: See [5], [6] and [7].

**XML namespace:** enables qualifying element and attribute names used in XML documents by associating them with namespaces identified by different XML schemas

NOTE: See [8], in the scope of the present document.

**XML complex type:** defined in an XML schema; cannot be directly used in an XML document; can be the concrete type or the derivation base type for an XML element type or for another XML complex type; ultimately defines constraints for an XML element on its XML attribute specifications and/or its XML content

NOTE: See [5], [6] and [7].

**XML element type:** declared by an XML schema; can be directly used in an XML document; as the concrete type of an XML element, directly or indirectly defines constraints on its XML attribute specifications and/or its XML content; can also be the concrete type or the derivation base type for another XML element type

NOTE: See [5], [6] and [7].

#### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CM Configuration Management
DTD Document Type Definition
EDGE Enhanced Data for GSM Evolution
GERAN GSM/EDGE Radio Access Network
GSM Global System for Mobile communication

IRP Integration Reference Point
IS Information Service
NRM Network Resource Model

UMTS Universal Mobile Telecommunications System UTRAN Universal Terrestrial Radio Access Network

XML eXtensible Markup Language

#### 4 Structure and content of configuration data XML files

The overall description of the file format of configuration data XML files is provided by 3GPP TS 32.615 [3].

Annex A of the present document defines the NRM-specific XML schema utranNrm.xsd for the UTRAN Network Resources IRP NRM defined in 3GPP TS 32.642 [1].

XML schema utranNrm.xsd explicitly declares NRM-specific XML element types for the related NRM.

The definition of those NRM-specific XML element types complies with the generic mapping rules defined in 3GPP TS 32.615 [3].

# Annex A (normative): Configuration data file NRM-specific XML schema (file name "utranNrm.xsd")

The following XML schema utranNrm.xsd is the NRM-specific schema for the UTRAN Network Resources IRP NRM defined in 3GPP TS 32.642 [1]:

```
<?xml version="1.0" encoding="UTF-8"?>
<!--
 3GPP TS 32.645 UTRAN Network Resources IRP
 Bulk CM Configuration data file NRM-specific XML schema
 utranNrm.xsd
<schema
 targetNamespace=
"http://www.3gpp.org/ftp/specs/archive/32_series/32.645#utranNrm"
 elementFormDefault="qualified"
 xmlns="http://www.w3.org/2001/XMLSchema"
 xmlns:xn=
"http://www.3gpp.org/ftp/specs/archive/32_series/32.625#genericNrm"
 xmlns:un=
"http://www.3gpp.org/ftp/specs/archive/32_series/32.645#utranNrm"
 xmlns:qn=
"http://www.3gpp.org/ftp/specs/archive/32_series/32.655#geranNrm"
 <import</pre>
   namespace=
"http://www.3gpp.org/ftp/specs/archive/32_series/32.625#genericNrm"
 <import
   namespace=
"http://www.3gpp.org/ftp/specs/archive/32_series/32.655#geranNrm"
  <!-- UTRAN Network Resources IRP NRM attribute related XML types -->
 <simpleType name="localCellId">
    <restriction base="integer">
     <minInclusive value="0"/>
      <maxInclusive value="268435455"/>
    </restriction>
  </simpleType>
  <simpleType name="cId">
    <restriction base="integer">
     <minInclusive value="0"/>
      <maxInclusive value="65535"/>
    </restriction>
  </simpleType>
  <simpleType name="uarfcnDl">
    <restriction base="integer">
      <minInclusive value="0"/>
      <maxInclusive value="16383"/>
    </restriction>
  </simpleType>
 <simpleType name="uarfcnUl">
    <restriction base="integer">
      <minInclusive value="0"/>
      <maxInclusive value="16383"/>
    </restriction>
  </simpleType>
  <simpleType name="primaryScramblingCode">
    <restriction base="integer">
      <minInclusive value="0"/>
      <maxInclusive value="511"/>
    </restriction>
```

```
</simpleType>
<simpleType name="primaryCpichTxPower">
  <restriction base="decimal">
    <fractionDigits value="1"/>
    <minInclusive value="-10"/>
    <maxInclusive value="+50"/>
  </restriction>
</simpleType>
<simpleType name="maximumTransmissionPower">
  <restriction base="decimal">
    <fractionDigits value="1"/>
    <minInclusive value="0"/>
    <maxInclusive value="50"/>
  </restriction>
</simpleType>
<simpleType name="primarySchPower">
  <restriction base="decimal">
    <fractionDigits value="1"/>
    <minInclusive value="-35"/>
    <maxInclusive value="+15"/>
  </restriction>
</simpleType>
<simpleType name="secondarySchPower">
  <restriction base="decimal">
    <fractionDigits value="1"/>
    <minInclusive value="-35"/>
    <maxInclusive value="+15"/>
  </restriction>
</simpleType>
<simpleType name="bchPower">
  <restriction base="decimal">
    <fractionDigits value="1"/>
    <minInclusive value="-35"/>
    <maxInclusive value="+15"/>
  </restriction>
</simpleType>
<simpleType name="lac">
 <union>
  <simpleType>
  <restriction base="integer">
    <minInclusive value="1"/>
    <maxInclusive value="65533"/>
   </restriction>
  </simpleType>
  <simpleType>
   <restriction base="integer">
    <minInclusive value="65535"/>
    <maxInclusive value="65535"/>
   </restriction>
  </simpleType>
 </union>
</simpleType>
<simpleType name="rac">
  <restriction base="integer">
    <minInclusive value="0"/>
    <maxInclusive value="255"/>
  </restriction>
</simpleType>
<simpleType name="sac">
  <restriction base="integer">
    <minInclusive value="0"/>
    <maxInclusive value="65535"/>
  </restriction>
</simpleType>
<complexType name="uraList">
  <sequence>
    <element name="ura" minOccurs="1" maxOccurs="8">
      <simpleType>
        <restriction base="integer">
```

```
<minInclusive value="0"/>
          <maxInclusive value="65535"/>
        </restriction>
      </simpleType>
    </element>
  </sequence>
</complexType>
<!-- UTRAN Network Resources IRP NRM class associated XML elements -->
<element
 name="RncFunction"
  substitutionGroup="xn:ManagedElementOptionallyContainedNrmClass"
  <complexType>
    <complexContent>
      <extension base="xn:NrmClass">
        <sequence>
          <element name="attributes" minOccurs="0">
            <complexType>
              <all>
                <element name="userLabel" minOccurs="0"/>
                <element name="mcc" minOccurs="0"/>
<element name="mnc" minOccurs="0"/>
                <element name="rncId" minOccurs="0"/>
              </all>
            </complexType>
          </element>
          <choice minOccurs="0" maxOccurs="unbounded">
            <element ref="un:UtranCell"/>
            <element ref="un:IubLink"/>
            <element ref="xn:VsDataContainer"/>
          </choice>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
</element>
<element
  name="NodeBFunction"
  substitutionGroup="xn:ManagedElementOptionallyContainedNrmClass"
  <complexType>
    <complexContent>
      <extension base="xn:NrmClass">
        <sequence>
          <element name="attributes" minOccurs="0">
            <complexType>
                <element name="userLabel" minOccurs="0"/>
                <element name="nodeBFunctionIubLink" minOccurs="0"/>
              </all>
            </complexType>
          </element>
          <choice minOccurs="0" maxOccurs="unbounded">
            <element ref="xn:VsDataContainer"/>
          </choice>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
</element>
<element name="UtranCell">
  <complexType>
    <complexContent>
      <extension base="xn:NrmClass">
        <sequence>
          <element name="attributes" minOccurs="0">
            <complexType>
              <all>
                <element name="userLabel" minOccurs="0"/>
                <element name="cId" type="un:cId" minOccurs="0"/>
                <element
                  name="localCellId"
                   type="un:localCellId"
                  minOccurs="0"
```

/>

```
<element
                  name="uarfcnUl"
                  type="un:uarfcnUl"
                  minOccurs="0"
                <element
                  name="uarfcnDl"
                  type="un:uarfcnDl"
                  minOccurs="0"
                />
                <element
                  name="primaryScramblingCode"
                  type="un:primaryScramblingCode"
                  minOccurs="0"
                />
                <element
                  name="primaryCpichTxPower"
                  type="un:primaryCpichTxPower"
                  minOccurs="0"
                />
                <element
                  name="maximumTransmissionPower"
                  type="un:maximumTransmissionPower"
                  minOccurs="0"
                />
                <element
                  name="primarySchPower"
                  type="un:primarySchPower"
                  minOccurs="0"
                />
                  name="secondarySchPower"
                  type="un:secondarySchPower"
                  minOccurs="0"
                <element name="bchPower"</pre>
                  type="un:bchPower"
                  minOccurs="0"
                <element name="lac" type="un:lac" minOccurs="0"/>
                <element name="rac" type="un:rac" minOccurs="0"/>
                <element name="sac" type="un:sac" minOccurs="0"/>
                <element name="uraList" type="un:uraList" minOccurs="0"/>
                <element name="utranCellIubLink" minOccurs="0"/>
              </all>
            </complexType>
          </element>
          <choice minOccurs="0" maxOccurs="unbounded">
            <element ref="un:UtranRelation"/>
            <element ref="gn:GsmRelation"/>
            <element ref="xn:VsDataContainer"/>
          </choice>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
</element>
<element name="IubLink">
  <complexType>
    <complexContent>
      <extension base="xn:NrmClass">
        <sequence>
          <element name="attributes" minOccurs="0">
            <complexType>
              <all>
                <element name="userLabel" minOccurs="0"/>
                <element name="iubLinkUtranCell" minOccurs="0"/>
                <element name="iubLinkNodeBFunction" minOccurs="0"/>
              </all>
            </complexType>
          </element>
          <choice minOccurs="0" maxOccurs="unbounded">
            <element ref="xn:VsDataContainer"/>
          </choice>
        </sequence>
      </extension>
```

```
</complexContent>
  </complexType>
</element>
<element name="UtranRelation">
  <complexType>
    <complexContent>
      <extension base="xn:NrmClass">
        <sequence>
          <element name="attributes" minOccurs="0">
            <complexType>
              <all>
                <element name="adjacentCell" minOccurs="0"/>
                <element
                  name="uarfcnUl"
                  type="un:uarfcnUl"
                  minOccurs="0"
                <element
                  name="uarfcnDl"
                   type="un:uarfcnDl"
                  minOccurs="0"
                <element
                  name="primaryScramblingCode"
                   type="un:primaryScramblingCode"
                  minOccurs="0"
                <element
                  name="primaryCpichTxPower"
                   type="un:primaryCpichTxPower"
                  minOccurs="0"
                <element name="lac" type="un:lac" minOccurs="0"/>
              </all>
            </complexType>
          </element>
          <choice minOccurs="0" maxOccurs="unbounded">
            <element ref="xn:VsDataContainer"/>
          </choice>
        </sequence>
      </extension>
    </complexContent>
  </complexType>
</element>
 name="ExternalUtranCell"
  substitutionGroup="xn:SubNetworkOptionallyContainedNrmClass"
  <complexType>
    <complexContent>
      <extension base="xn:NrmClass">
        <sequence>
          <element name="attributes" minOccurs="0">
            <complexType>
              <all>
                <element name="userLabel" minOccurs="0"/>
                <element name="cId" type="un:cId" minOccurs="0"/>
<element name="mcc" minOccurs="0"/>
                <element name="mnc" minOccurs="0"/>
                <element name="rncId" minOccurs="0"/>
                <element
                  name="uarfcnUl"
                  type="un:uarfcnUl"
                  minOccurs="0"
                />
                <element
                  name="uarfcnDl"
                   type="un:uarfcnDl"
                  minOccurs="0"
                />
                <element
                  name="primaryScramblingCode"
                   type="un:primaryScramblingCode"
                  minOccurs="0"
                <element
```

```
name="primaryCpichTxPower"
                      type="un:primaryCpichTxPower"
                      minOccurs="0"
                    />
                    <element name="lac" type="un:lac" minOccurs="0"/>
<element name="rac" type="un:rac" minOccurs="0"/>
                  </all>
                </complexType>
             </element>
             <choice minOccurs="0" maxOccurs="unbounded">
               <element ref="xn:VsDataContainer"/>
             </choice>
           </sequence>
         </extension>
      </complexContent>
    </complexType>
  </element>
</schema>
```

# Annex B (informative): XML schema electronic files

The electronic files corresponding to the normative XML schemas defined in the present document are available in native form in the following archive:

http://www.3gpp.org/ftp/specs/archive/32\_series/32.645/schema/32645-560-XMLSchema.zip

## Annex C (informative): Change history

	Change history						
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Jun 2002	S_16	SP-020298			Submitted to TSG SA #16 for Information	1.0.0	
Sep 2002	S_17	SP-020462			Submitted to TSG SA #17 for Approval	2.0.0	5.0.0
Jun 2003	S_20	SP-030283	001		Deletion of UTRAN attribute relationType in XML Schema	5.0.0	5.1.0
Jun 2003	S_20	SP-030287	002		Correction of UTRAN NRM XML schema namespace URIs	5.0.0	5.1.0
Jun 2003	S_20	SP-030288	003		Generic NRM XML schema dependencies removal	5.0.0	5.1.0
Jun 2003	S_20	SP-030285	004		Remove UTRAN NRM XML schema duplicate MOC attribute XML declarations	5.0.0	5.1.0
Sep 2003	S_21	SP-030418	005		Inclusion of External BSS Function in GERAN XML Schema – impacts on 32.645 (UTRAN XML Schema) - Alignment with 32.652/655	5.1.0	5.2.0
Oct 2003					Attached to this TS the normative XML schema electronic files corresponding to Sept 2003 TS 32.645	5.2.0	5.2.1
Dec 2003	S_22	SP-030646	006		Correction of the number of possible URAs from 1 to 8	5.2.1	5.3.0
Mar 2004	S_23	SP-040131	007		Add the capability to contain instances of VsDataContainer to some MOs - Align with the IS 32.642	5.3.0	5.4.0
Jun 2004	S_24	SP-040259	800		Removal of XML schema URI dependencies	5.4.0	5.5.0
Jun 2004	S_24	SP-040258	009		Correction of the annex related to XML schema electronic files publication	5.4.0	5.5.0
Jun 2004	S_24	SP-040254	010		The specification does not support all UMTS frequency bands	5.4.0	5.5.0
Sep 2004	S_25	SP-040592	012		Correction of the XML code – Reinsertion of "targetNamespace="	5.5.0	5.6.0

## History

Document history				
V5.0.0	September 2002	Publication		
V5.1.0	June 2003	Publication		
V5.2.0	September 2003	Publication (Withdrawn)		
V5.2.1	October 2003	Publication		
V5.3.0	December 2003	Publication		
V5.4.0	March 2004	Publication		
V5.5.0	June 2004	Publication		
V5.6.0	September 2004	Publication		