ETSI TS 132 317 V9.0.0 (2010-01)

Technical Specification

Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS);


LTE:

Telecommunication management;

Generic Integration Reference Point (IRP) management;

SOAP Solution Set (SS)

(3GPP TS 32.317 version 9.0.0 Release 9)

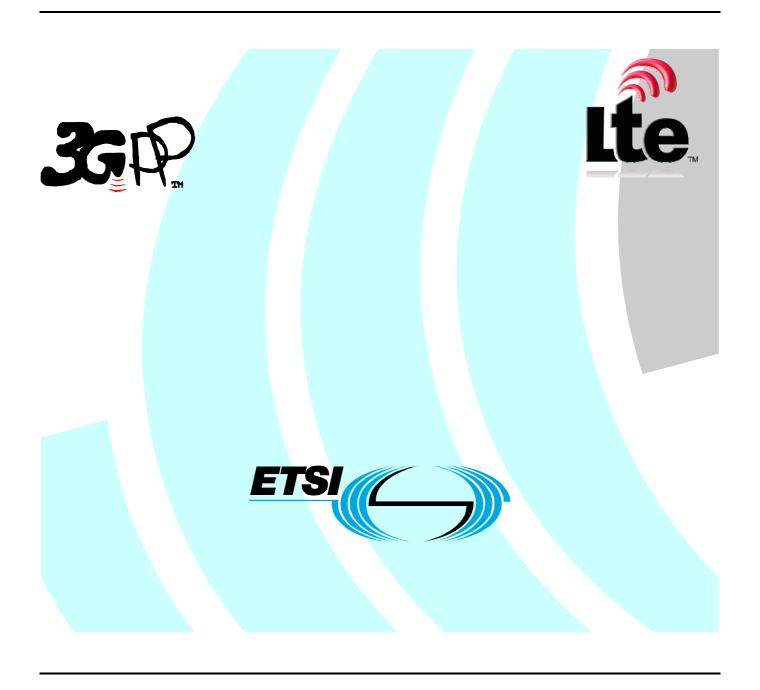

Reference RTS/TSGS-0532317v900 Keywords

GSM, LTE, UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2010. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intellectual Property Rights		2
Foreword		2
Foreword		4
Introduction		4
•		
2 References		5
3 Definitions and abbre	viations	5
3.1 Definitions		5
3.2 Abbreviations		6
4 Architectural Feature	S	6
	mapping	
	PVersion	
1 0	ters	
1 1	ieters	
1 1	on	
	erationProfile	
	ters	
5.2.2.2 Output paran	neters	8
	on	
5.2.3 Operation getNo	tificationProfile	8
	ters	
1 1	neters	
5.2.3.3 Fault definiti	on	9
Annex A (normative):	WSDL specifications	10
Annex B (informative):	Void	13
Annex C (informative):	Change history	14
History		15

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

32.317:	Generic Integration Reference Point (IRP) management; SOAP Solution Set (SS)
32.313:	Generic Integration Reference Point (IRP) management; Common Object Request Broker Architecture (CORBA) Solution Set (SS)
32.312:	Generic Integration Reference Point (IRP) management; Information Service (IS)
32.311:	Generic Integration Reference Point (IRP) management; Requirements

1 Scope

The present document specifies the SOAP Solution Set for Generic IRP management whose capabilities are specified in Generic IRP management: Information Service (3GPP TS 32.312 [1]).

This Solution Set specification is related to TS 32.312 V9.0.X.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document.*

[1]]	3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP) management: Information Service (IS)".
[2]]	3GPP TS 32.311: "Telecommunication management; Generic Integration Reference Point (IRP) management; Requirements".
[3]]	3GPP TS 32.111-2: "Telecommunication management; Alarm Integration Reference Point (IRP); Information Service (IS)".
[4]]	3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)".
[5]]	W3C WSDL 1.1 specification (http://www.w3.org/TR/2001/NOTE-wsdl-20010315)
[6]]	Thompson, H.S., Beech, D., Maloney, M., Mendleshon, N., eds. (May 2002). "XML Schema Part 1: Structures," Recommendation, World Wide Web Consortium http://www.w3.org/TR/xmlschema-1/
[7]]	Biron, P.V., Malhotra, A., eds. (May 2002). "XML Schema Part 2: Datatypes," Recommendation, World Wide Web Consortium http://www.w3.org/TR/xmlschema-2/
[8]]	W3C SOAP 1.1 specification (http://www.w3.org/TR/2000/NOTE-SOAP-20000508/)
[9]]	RFC 2616 (June 1999): "Hypertext Transfer Protocol – HTTP/1.1"
[10	0]	W3C WSDL 1.1 specification (http://www.w3.org/TR/2001/NOTE-wsdl-20010315)
[1	1]	W3C SOAP 1.2 specification (http://www.w3.org/TR/soap12-part1/)

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TS 32.312 [1] apply.

IRP document version number string (or "IRPVersion"): See 3GPP TS 32.311 [2] subclause 3.1.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

HTTP HyperText Transfer Protocol IRP Integration Reference Point IOC Information Object Class

SS Solution Set

WSDL Web Services Description Language
XML eXtensible Markup Language
WSDL Web Service Description Language

WS-I Web Services Interoperability Organization

4 Architectural Features

The overall architectural feature of this IRP is specified in 3G TS 32.312 [1]. This clause specifies features that are specific to the SOAP SS.

This clause specifies features that are specific to the SOAP SS.

The SOAP 1.1 specification [8] and WSDL 1.1 specification [5] are supported.

The SOAP 1.2 specification [11] is optionally supported.

This specification uses "document" style in the WSDL description.

This specification uses "literal" encoding style in the WSDL description.

This specification uses a number of namespace prefixes throughout that are listed in Table 4.1.

Table 4.1: Prefixes and Namespaces used in this specification

Prefix	Namespace			
http	http://schemas.xmlsoap.org/wsdl/http/			
soap	http://schemas.xmlsoap.org/wsdl/soap/			
SOAP-ENV	http://schemas.xmlsoap.org/soap/envelope/			
SOAP-ENC or	http://schemas.xmlsoap.org/soap/encoding/			
soapenc				
xs or xsd	http://www.w3.org/2001/XMLSchema			
xsi	http://www.w3.org/2001/XMLSchema-instance			
genericIRPData	http://www.3gpp.org/ftp/Specs/archive/32_series/32317/schema/32317-810/GenericIRPData			

5 Mapping

5.1 Operation mapping

Generic IRP management: IS [1] defines semantics of operation visible across the Itf-N. Table 5.1 indicates mapping of these operations to their equivalents defined in this SS.

Table 5.1: Mapping from IS Notification/Operation to SS equivalents

IS Operation TS 32.312 [1]	SS Operation	Qualifier
getIRPVersion	getIRPVersion	M
getOperationProfile	getOperationProfile	0
getNotificationProfile	getNotificationProfile	0

5.2 Operation parameter mapping

5.2.1 Operation getIRPVersion

5.2.1.1 Input parameters

None.

Here is the XML schema fragment of the getIRPVersion request:

```
<!-- getIRPVersion Request --> <element name="getIRPVersion"> </element>
```

5.2.1.2 Output parameters

Table 5.2.1.2: Mapping from IS getIRPVersion output parameters to SS equivalents

IS Operation parameter SS Operation parameter		Qualifier
versionNumberSet	genericIRPData:VersionNumberSetType versionNumberSet	M
status	genericIRPData:getIRPVersionFault	М

Here is the XML schema fragment of the getIRPVersion response:

5.2.1.3 Fault definition

5.2.2 Operation getOperationProfile

5.2.2.1 Input parameters

Table 5.2.2.1: Mapping from IS getOperationProfile input parameters to SS equivalents

IS Operation parameter	SS Operation parameter	Qualifier
iRPVersion	genericIRPData:VersionNumberType iRPVersion	М

Here is the XML schema fragment of the getOperationProfile request:

5.2.2.2 Output parameters

Table 5.2.2.2: Mapping from IS getOperationProfile output parameters to SS equivalents

IS Operation parameter	SS Operation parameter	Qualifier
operationNameProfile,operationParameterProfile	genericIRPData:OperationSetType operationSet	M
status	genericIRPData:getOperationProfileFault	М

Here is the XML schema fragment of the getOperationProfile response:

5.2.2.3 Fault definition

5.2.3 Operation getNotificationProfile

5.2.3.1 Input parameters

Table 5.2.3.1: Mapping from IS getNotificationProfile input parameters to SS equivalents

IS Operation parameter	SS Operation parameter	Qualifier
iRPVersion	genericIRPData:VersionNumberType iRPVersion	M

Here is the XML schema fragment of the getNotificationProfile request:

5.2.3.2 Output parameters

Table 5.2.3.2: Mapping from IS getNotificationProfile output parameters to SS equivalents

IS Operation parameter	SS Operation parameter	Qualifier
notificationNameProfile,notificationParameterProfile	genericIRPData:NotificationSetType notificationSet	М
Status	genericIRPData:getNotificationProfileFault	М

Here is the XML schema fragment of the getNotificationProfile response:

5.2.3.3 Fault definition

Annex A (normative): WSDL specifications

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions xmlns="http://schemas.xmlsoap.org/wsdl/"</pre>
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:genericIRPSystem="http://www.3gpp.org/ftp/Specs/archive/32_series/32.317/schema/32317-
810/GenericIRPSystem"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:genericIRPData="http://www.3gpp.org/ftp/Specs/archive/32 series/32.317/schema/32317-
810/GenericIRPData"
targetNamespace="http://www.3gpp.org/ftp/Specs/archive/32_series/32.317/schema/32317-
810/GenericIRPSystem">
   <types>
      <schema targetNamespace="http://www.3gpp.org/ftp/Specs/archive/32 series/32.317/schema/32317-</pre>
810/GenericIRPData" xmlns="http://www.w3.org/2001/XMLSchema">
         <element name="OperationNotSupportedFault" type="string"/>
         <element name="InvalidParameterFault" type="string"/>
         <simpleType name="VersionNumberType">
             <restriction base="string"/>
         </simpleType>
         <complexType name="VersionNumberSetType">
            <sequence>
               <element name="versionNumber" type="genericIRPData:VersionNumberType"</pre>
maxOccurs="unbounded"/>
             </sequence>
         </complexType>
         <complexType name="ParameterSetType">
            <sequence>
                <element name="parameterName" type="string" maxOccurs="unbounded"/>
             </sequence>
         </complexType>
         <complexType name="OperationType">
             <sequence>
                <element name="operationName" type="string"/>
                <element name="parameterSet" type="genericIRPData:ParameterSetType"/>
             </sequence>
         </complexType>
         <complexType name="OperationSetType">
            <sequence>
                <element name="operation" type="genericIRPData:OperationType"</pre>
maxOccurs="unbounded"/>
             </sequence>
         </complexType>
         <complexType name="NotificationType">
             <sequence>
                <element name="notificationName" type="string"/>
                <element name="parameterSet" type="genericIRPData:ParameterSetType"/>
             </sequence>
         </complexType>
         <complexType name="NotificationSetType">
             <sequence>
                <element name="notification" type="genericIRPData:NotificationType"</pre>
maxOccurs="unbounded"/>
            </sequence>
         </complexType>
         <!-- getIRPVersion Request -->
         <element name="getIRPVersion"/>
         <!-- getIRPVersion Response -->
         <element name="getIRPVersionResponse">
             <complexType>
                <sequence>
                   <element name="versionNumberSet" type="genericIRPData:VersionNumberSetType"/>
                </sequence>
             </complexType>
         </element>
         <!-- getIRPVersion Fault -->
         <element name="getIRPVersionFault">
             <complexType>
                <choice>
                   <element name="getIRPVersionFault" type="string"/>
                </choice>
             </complexType>
         </element>
```

```
<!-- getOperationProfile Request -->
      <element name="getOperationProfile">
         <complexType>
            <sequence>
               <element name="iRPVersion" type="genericIRPData:VersionNumberType"/>
            </sequence>
         </complexType>
      </element>
      <!-- getOperationProfile Response -->
      <element name="getOperationProfileResponse">
         <complexType>
            <sequence>
                <element name="operationSet" type="genericIRPData:OperationSetType"/>
            </sequence>
         </complexType>
      </element>
      <!-- getOperationProfile Fault -->
      <element name="getOperationProfileFault">
         <complexType>
            <choice>
               <element name="getOperationProfileFault" type="string"/>
                <element ref="genericIRPData:OperationNotSupportedFault"/>
                <element ref="genericIRPData:InvalidParameterFault"/>
            </choice>
         </complexType>
      </element>
      <!-- getNotificationProfile Request -->
      <element name="getNotificationProfile">
         <complexType>
            <sequence>
               <element name="iRPVersion" type="genericIRPData:VersionNumberType"/>
            </sequence>
         </complexType>
      <!-- getNotificationProfile Response -->
      <element name="getNotificationProfileResponse">
         <complexType>
            <sequence>
      <element name="notificationSet" type="genericIRPData:NotificationSetType"/>
</sequence>
         </complexType>
      </element>
      <!-- getNotificationProfile Fault -->
      <element name="getNotificationProfileFault">
         <complexType>
            <choice>
               <element name="getNotificationProfileFault" type="string"/>
               <element ref="genericIRPData:OperationNotSupportedFault"/>
               <element ref="genericIRPData:InvalidParameterFault"/>
            </choice>
         </complexType>
      </element>
   </schema>
</types>
<message name="getIRPVersionRequest">
   <part name="parameter" element="genericIRPData:getIRPVersion"/>
</message>
<message name="getIRPVersionResponse">
   <part name="parameter" element="genericIRPData:getIRPVersionResponse"/>
<message name="getIRPVersionFault">
   <part name="parameter" element="genericIRPData:getIRPVersionFault"/>
</message>
<message name="getOperationProfileRequest">
   <part name="parameter" element="genericIRPData:getOperationProfile"/>
</message>
<message name="getOperationProfileResponse">
   <part name="parameter" element="genericIRPData:getOperationProfileResponse"/>
<message name="getOperationProfileFault">
   <part name="parameter" element="genericIRPData:getOperationProfileFault"/>
</message>
<message name="getNotificationProfileRequest">
  <part name="parameter" element="genericIRPData:getNotificationProfile"/>
</message>
<message name="getNotificationProfileResponse">
   <part name="parameter" element="genericIRPData:getNotificationProfileResponse"/>
</message>
```

```
<message name="getNotificationProfileFault">
      <part name="parameter" element="genericIRPData:getNotificationProfileFault"/>
   </message>
   <portType name="GenericIRPPortType">
      <operation name="getIRPVersion">
         <input message="genericIRPSystem:getIRPVersionRequest"/>
         <output message="genericIRPSystem:getIRPVersionResponse"/>
         <fault name="getIRPVersionFault" message="genericIRPSystem:getIRPVersionFault"/>
      </operation>
      <operation name="getOperationProfile">
         <input message="genericIRPSystem:getOperationProfileRequest"/>
         <output message="genericIRPSystem:getOperationProfileResponse"/>
         <fault name="getOperationProfileFault"
message="genericIRPSystem:getOperationProfileFault"/>
      </operation>
      <operation name="getNotificationProfile">
         <input message="genericIRPSystem:getNotificationProfileRequest"/>
         <output message="genericIRPSystem:getNotificationProfileResponse"/>
         <fault name="getNotificationProfileFault"
message="genericIRPSystem:getNotificationProfileFault"/>
      </operation>
   </portType>
   <operation name="getIRPVersion">
         <soap:operation</pre>
soapAction="http://www.3gpp.org/ftp/Specs/archive/32 series/32.307#getIRPVersion" style="document"/>
        <input>
            <soap:body use="literal"/>
         </input>
         <output>
            <soap:body use="literal"/>
         </output>
         <fault name="getIRPVersionFault">
            <soap:fault name="getIRPVersionFault" use="literal"/>
         </fault>
      </operation>
      <operation name="getOperationProfile">
         <soap:operation</pre>
soapAction="http://www.3gpp.org/ftp/Specs/archive/32 series/32.307#getOperationProfile"
style="document"/>
         <input>
            <soap:body use="literal"/>
         </input>
         <output>
            <soap:body use="literal"/>
         </output>
         <fault name="getOperationProfileFault">
            <soap:fault name="getOperationProfileFault" use="literal"/>
         </fault>
      </operation>
      <operation name="getNotificationProfile">
         <soap:operation</pre>
soapAction="http://www.3gpp.org/ftp/Specs/archive/32 series/32.307#getNotificationProfile"
style="document"/>
         <input>
            <soap:body use="literal"/>
         </input>
         <output>
            <soap:body use="literal"/>
         </output>
         <fault name="getNotificationProfileFault">
            <soap:fault name="getNotificationProfileFault" use="literal"/>
         </fault>
      </operation>
   </binding>
</definitions>
```

Annex B (informative): Void

Annex C (informative): Change history

	Change history							
Date	TSG #	TSG Doc.	CR	R	Subject/Comment	Cat	Old	New
Sep 2006	SA_33	SP-060555			Submitted to TSG SA #33 for Information			1.0.0
Dec 2006	SA_34	SP-060741			Submitted to TSG SA #34 for Approval		2.0.0	7.0.0
Mar 2007					Delete reference to the 32.314 CMIP SS. Reason: SA#35 endorsed the SA5 decision to not propagate the CMIP Solution Sets to Rel-7 (TS 32.3x4, TS 32.4x4, TS 32.6x4)		7.0.0	7.0.1
Jun 2007					Changed TS Title. Reason: SOAP does not stand anymore for "Simple Object Access Protocol"		7.0.1	7.0.2
Dec 2008	SA_42	SP-080845	0001		Incorrect URI specified in TS 32.317 (both word document and corresponding wsdl file)	F	7.0.2	7.1.0
Dec 2008	SA_42				Upgrade to Release 8		7.1.0	8.0.0
Mar 2009	SA_43	SP-090207	0002		Include portType and binding in the WSDL	С	8.0.0	8.1.0
Dec 2009	SA_46	SP-090719	0003		Discontinuation of the maintenance of WSDL/XML schema folders	F	8.1.0	9.0.0

History

	Document history					
V9.0.0	January 2010	Publication				