ETSI TS 132 533 V8.2.0 (2010-02)

Technical Specification

Universal Mobile Telecommunications System (UMTS);

LTE;


Telecommunication management;

Software management Integration Reference Point (IRP);

Common Object Request Broker Architecture (CORBA)

Solution Set (SS)

(3GPP TS 32.533 version 8.2.0 Release 8)

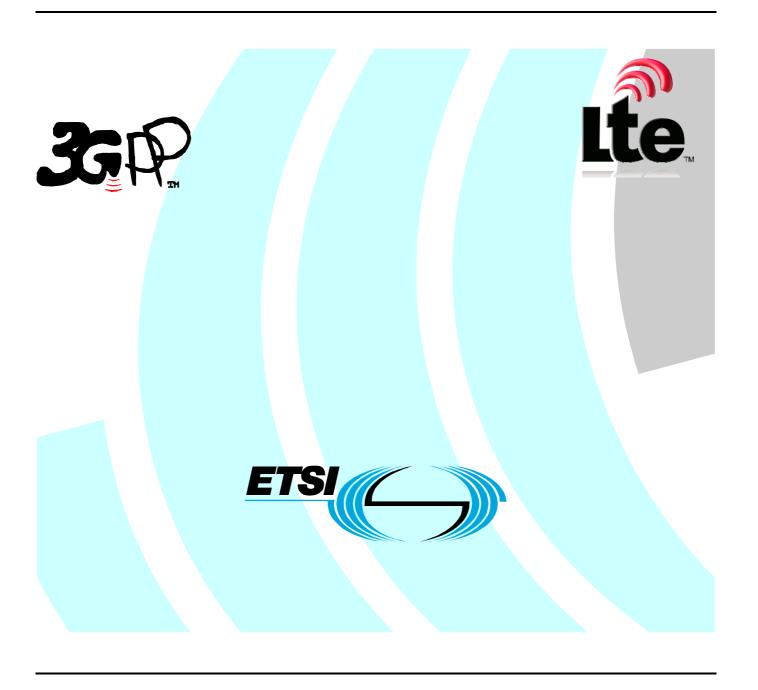

Reference
RTS/TSGS-0532533v820

Keywords
LTE, UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **LTE**[™] is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners. **GSM**® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intell	lectual Property Rights	2
	word	
	word	
	oduction	
1	Scope	
2	References	5
3	Definitions and abbreviations	5
3.1	Definitions and aboreviations	
3.2	Abbreviations	
4	Architectural Features	ε
5	Mapping	6
5.1	Operation and Notification mapping	
5.2	Operation parameter mapping	7
5.3	Notification parameter mapping	10
Anno	ex A (normative): IDL specifications	12
A.1	IDL specification (file name "SwMIRPConstDefs.idl")	12
A.2	IDL specification (file name "SwMIRPSystem.idl")	16
A.3	IDL specification (file name "SwMIRPNotifications.idl")	19
Anno	ex B (informative): Change history	23
Histo		24

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project Technical Specification Group Services and System Aspects, Telecommunication management; as identified below:

32	2.533:	Software management Integration Reference Point (IRP); Common Object Request Broker Architecture (CORBA) Solution Set (SS)
32	2.532:	Software management Integration Reference Point (IRP); Information Service (IS)
32	2.531:	Software management; Concepts and Integration Reference Point (IRP) Requirements

1 Scope

The present document is the "CORBA Solution Set" of Software Management IRP for the IRP whose semantics is specified in Software Management IRP Information Service (3GPP TS 32.532 [7]).

This Solution Set specification is related to 3GPP TS 32.532 [7] V8.1.X.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

 [2] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".

 [3] 3GPP TS 32.102: "Telecommunication management; Architecture".

 [4] 3GPP TS 21905: "Vocabulary for 3GPP Specifications".

 [5] 3GPP TR 32.816: "Telecommunication management; Study on Management of Evolved Universal Terrestrial Radio Access Network (E-UTRAN) and Evolved Packet Core (EPC)".

 [6] 3GPP TS 32.531: "Telecommunication management; Software management; Concepts and Integration Reference Point (IRP) Requirements".
- [7] 3GPP TS 32.532: "Telecommunication management; Software management Integration Reference Point (IRP); Information Service (IS)".
- [8] OMG TC Document telecom/98-11-01: "OMG Notification Service". http://www.omg.org/technology/documents/

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 32.101 [2], TS 32.102 [3] and TR 21.905 [4] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TS 32.532 [7], TS 32.531 [6], TS 32.101 [1], TS 32.102 [2] and TS 21.905 [4], in that order.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [4], TS 32.sco [6] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TS 32.532 [7], TS 32.531 [6], TS 32.101 [1], TS 32.102 [2] and TS 21.905 [4], in that order..

4 Architectural Features

The overall architectural feature of Software Management IRP is specified in 3GPP TS 32.532 [7].

5 Mapping

5.1 Operation and Notification mapping

Software Management IRP: IS 3GPP TS (see 3GPP TS 32.532 [7]) defines semantics of operations and notifications visible across the Itf-N. Table 5.1.1 indicates mapping of these operations and notifications to their equivalents defined in this SS.

Table 5.1.1: Mapping from IS Notification/Operation to SS equivalents

IS Operation/ notification	SS Method	Qualifier
Software Management IRP: IS 3GPP TS 32.532[7]		
listSwMCapabilities	listSwMCapabilities	М
listSwMProfiles	listSwMProfiles	М
createSwMProfile	createSwMProfile	М
deleteSwMProfile	deleteSwMProfile	М
listSwMProcesses	listSwMProcesses	М
resumeSwMProcess	resumeSwMProcess	М
swFallback	swFallback	М
terminateSwMProcess	terminateSwMProcess	М
changeSwMProfile	changeSwMProfile	0
notifySwMProfileCreation	notifySwMProfileCreation	М
notifySwMProfileDeletion	notifySwMProfileDeletion	М
notifySwMProcessCreation	notifySwMProcessCreation	М
notifySwMProcessStage	notifySwMProcessStage	М
notifySwMProcessDeletion	notifySwMProcessDeletion	М
notifyNewSwAvailability	notifyNewSwAvailability	0
notifySwMProfileChange	notifySwMProfileChange	0

5.2 Operation parameter mapping

Reference 3GPP TS 32.532 [6] defines semantics of parameters carried in operations across the Itf-N. The following set of tables indicate the mapping of these parameters, as per operation, to their equivalents defined in this SS.

Table 5.2-1: Mapping from IS listSwMCapabilities parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
nEInformation	SwMIRPConstDefs::NEInformation	М
capabilitiesList	SwMIRPConstDefs::SwMCapabilitiesList	M
result	Exceptions: SwMIRPConstDefs::ListSwMCapabilities, GenericIRPManagementSystem::ParameterNotSupported, GenericIRPManagementSystem::InvalidParameter, GenericIRPManagementSystem::ValueNotSupported, GenericIRPManagementSystem::OperationNotSupported	M

Table 5.2-2: Mapping from IS listSwMProfiles parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
nEInformation	SwMIRPConstDefs::NEInformation	M
profileList	SwMIRPConstDefs::SwMProfileList	M
result	Exceptions: SwMIRPConstDefs::ListSwMProfile, GenericIRPManagementSystem::ParameterNotSupported, GenericIRPManagementSystem::InvalidParameter, GenericIRPManagementSystem::ValueNotSupported, GenericIRPManagementSystem::OperationNotSupported	M

Table 5.2-3: Mapping from IS createSwMProfile parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
id	SwMIRPConstDefs::IdOpt	0
nEInformation	SwMIRPConstDefs::NEInformation	M
swVersionToBeInstalled	SwMIRPConstDefs::SwVersionToBeInstalledConditional	CM
stepsAndSelectedStopPointList	SwMIRPConstDefs::StepsAndSelectedStopPointList	M
selectedFinalAdministrativeState	SwMIRPConstDefs::SelectedFinalAdministrativeState	M
result	Exceptions:	M
	SwMIRPConstDefs::CreateSwMProfile,	
	<pre>GenericIRPManagementSystem::ParameterNotSupported,</pre>	
	GenericIRPManagementSystem::InvalidParameter,	
	GenericIRPManagementSystem::ValueNotSupported,	
	GenericIRPManagementSystem::OperationNotSupported	

Table 5.2-4: Mapping from IS deleteSwMProfile parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
id	SwMIRPConstDefs::Id	М
result	Exceptions:	М
	SwMIRPConstDefs::DeleteSwMProfile,	
	GenericIRPManagementSystem::ParameterNotSupported,	
	<pre>GenericIRPManagementSystem::InvalidParameter,</pre>	
	<pre>GenericIRPManagementSystem::ValueNotSupported,</pre>	
	GenericIRPManagementSystem::OperationNotSupported	

Table 5.2-5: Mapping from IS listSwMProcesses parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
nEIdentification	SwMIRPConstDefs::NEIdentificationOpt	0
processList	SwMIRPConstDefs::ProcessList	M
	Exceptions: SwMIRPConstDefs::ListSwMProcesses, GenericIRPManagementSystem::ParameterNotSupported, GenericIRPManagementSystem::InvalidParameter, GenericIRPManagementSystem::ValueNotSupported, GenericIRPManagementSystem::OperationNotSupported	M

Table 5.2-6: Mapping from IS resumeSwMProcess parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
id	SwMIRPConstDefs::Id	M
startStepName	SwMIRPConstDefs::NameOfStep	M
result	Exceptions:	M
	SwMIRPConstDefs::ResumeSwMProcess,	
	<pre>GenericIRPManagementSystem::ParameterNotSupported,</pre>	
	GenericIRPManagementSystem::InvalidParameter,	
	GenericIRPManagementSystem::ValueNotSupported,	
	GenericIRPManagementSystem::OperationNotSupported	

Table 5.2-7: Mapping from IS swFallback parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
filter	SwMIRPConstDefs::Filter	М
nEList	SwMIRPConstDefs::NEList	M
result	Exceptions:	М
	SwMIRPConstDefs::SwFallback,	
	GenericIRPManagementSystem::ParameterNotSupported,	
	GenericIRPManagementSystem::InvalidParameter,	
	<pre>GenericIRPManagementSystem::ValueNotSupported,</pre>	
	GenericIRPManagementSystem::OperationNotSupported	

Table 5.2-8: Mapping from IS terminateSwMProcess parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
id	SwMIRPConstDefs::Id	M
result	Exceptions:	М
	SwMIRPConstDefs::TerminateSwMProcess,	
	<pre>GenericIRPManagementSystem::ParameterNotSupported,</pre>	
	<pre>GenericIRPManagementSystem::InvalidParameter,</pre>	
	<pre>GenericIRPManagementSystem::ValueNotSupported,</pre>	
	GenericIRPManagementSystem::OperationNotSupported	

Table 5.2-9: Mapping from IS changeSwMProfile parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
id	SwMIRPConstDefs::Id	М
nEInformation	SwMIRPConstDefs::NEInformation	M
swVersionToBeInstalled	SwMIRPConstDefs::SwVersionToBeInstalledConditional	CM
stepsAndSelectedStopPointList	SwMIRPConstDefs::StepsAndSelectedStopPointList	М
selectedFinalAdministrativeState	SwMIRPConstDefs::SelectedFinalAdministrativeState	М
versionNumber	SwMIRPConstDefs::VersionNumber	М
conflictingProfileId	SwMIRPConstDefs::ConflictingProfileIdConditional	С
result	Exceptions:	M
	SwMIRPConstDefs::CreateSwMProfile,	
	GenericIRPManagementSystem::ParameterNotSupported,	
	GenericIRPManagementSystem::InvalidParameter,	
	GenericIRPManagementSystem::ValueNotSupported,	
	GenericIRPManagementSystem::OperationNotSupported	

5.3 Notification parameter mapping

Reference 3GPP TS 32.532 [7] defines semantics of parameters carried in notifications. The following tables indicate the mapping of these parameters to their SS equivalents."

The following tables indicate the mapping of these parameters to their OMG CORBA Structured Event (defined in OMG Notification Service [8]) equivalents. The composition of OMG Structured Event, as defined in the OMG Notification Service [8], is:

```
Header
Fixed Header
domain_name
type_name
event_name
Variable Header

Body
filterable_body_fields
remaining_body
```

The following tables list all OMG Structured Event attributes in the second column. The first column identifies the Software Management IRP: IS [7] defined notification parameters.

IS Parameters **Qualifier Comment** <SS> Parameters id SwMIRPConstDefs::Id M versionNumber SwMIRPConstDefs::VersionNumber M SwMIRPConstDefs::NEInformation nEInformation М swVersionToBeInstalled SwMIRPConstDefs::SwVersionToBeInstalledConditional CM stepsAndSelectedStopPointList SwMIRPConstDefs::StepsAndSelectedStopPointList M selectedFinalAdministrativeState SwMIRPConstDefs::SelectedFinalAdministrativeState M

Table 5.3.1: Mapping for notifySwMProfileCreation

Table 5.3.2: Mapping for notifySwMProfileDeletion

IS Parameters	<ss> Parameters</ss>	Qualifier	Comment
id	SwMIRPConstDefs::Id	М	

Table 5.3.3: Mapping for notifySwMProcessCreation

IS Parameters	<ss> Parameters</ss>	Qualifier	Comment
id	SwMIRPConstDefs::Id	M	
nEIdentification	SwMIRPConstDefs::NEIdentification	M	
profileId	SwMIRPConstDefs::ProfileId	M	
matchingNEInformation	SwMIRPConstDefs::MatchingNEInformation	M	
stepInfoList	SwMIRPConstDefs::StepInfoList	M	

Table 5.3.4: Mapping for notifySwMProcessStage

IS Parameters	<ss> Parameters</ss>	Qualifier	Comment
id	SwMIRPConstDefs::Id	M	
stepInfoList	SwMIRPConstDefs::StepInfoList	М	

Table 5.3.5: Mapping for notifySwMProcessDeletion

IS Parameters	<ss> Parameters</ss>	Qualifier	Comment
id	SwMIRPConstDefs::Id	M	
triggerForDeletion	SwMIRPConstDefs::TriggerForDeletion	М	
additionalInformation	SwMIRPConstDefs::AdditionalInformationOptional	0	

Table 5.3.6: Mapping for notifyNewSwAvailability

IS Parameters	<ss> Parameters</ss>	Qualifier	Comment
nEandSWversion	SwMIRPConstDefs::NEandSWversion	М	

Table 5.3.7: Mapping for notifySwMProfileChange

IS Parameters	<ss> Parameters</ss>	Qualifier	Comment
id	SwMIRPConstDefs::Id	М	
versionNumber	SwMIRPConstDefs::VersionNumber	M	
nEInformation	SwMIRPConstDefs::NEInformation	М	
swVersionToBeInstalled	SwMIRPConstDefs::SwVersionToBeInstalledConditional	CM	
stepsAndSelectedStopPointList	SwMIRPConstDefs::StepsAndSelectedStopPointList	М	
selectedFinalAdministrativeState	SwMIRPConstDefs::SelectedFinalAdministrativeState	М	

Annex A (normative): IDL specifications

A.1 IDL specification (file name "SwMIRPConstDefs.idl")

```
// File: SwMIRPConstDefs.idl
#ifndef _SWM_IRP_CONST_DEFS_IDL_
#define _SWM_IRP_CONST_DEFS_IDL_
#include <KernelCmConstDefs.idl>
#include <NotificationIRPConstDefs.idl>
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
/* ## Module: SwMIRPConstDefs */
module SwMIRPConstDefs
{
/************************
/st definition of types used in operations for Software Management : st/
/\star types used in several operations: \star/
   enum Result { SUCCESS, PARTLY_SUCCESSFUL, FAILURE, NE_INFORMATION_INTERSECTION,
STEPNAME DOES NOT MATCH };
   typedef KernelCmConstDefs::DN Id;
  IdOpt is a type carrying an optional parameter.
   If the boolean is TRUE, then the value is present.
  Otherwise the value is absent.
  union IdOpt switch (boolean)
      case TRUE: KernelCmConstDefs::DN value;
   {\tt ConflictingProfileIdConditional\ is\ a\ type\ carrying\ a\ conditional\ parameter.}
   The boolean shall be TRUE, if the condition described in TS 32.532 or 32.502 is fulfilled.
   In this case the value is present. Otherwise the value is absent.
  union ConflictingProfileIdConditional switch (boolean)
     case TRUE: Id value;
   };
   typedef string NEInformation;
   typedef NEInformation MatchingNEInformation;
   typedef string AdditionalInformation;
  {\tt AdditionalInformationOpt\ is\ a\ type\ carrying\ a\ optional\ parameter.}
   The boolean shall be TRUE, if the condition described in TS 32.532 is fulfilled.
   In this case the value is present. Otherwise the value is absent.
  union AdditionalInformationOpt switch (boolean)
      case TRUE: AdditionalInformation value;
   };
```

```
typedef KernelCmConstDefs::DN NEIdentification;
NEIdentificationOpt is a type carrying an optional parameter.
If the boolean is TRUE, then the value is present.
Otherwise the value is absent.
union NEIdentificationOpt switch (boolean)
{
   case TRUE: NEIdentification value;
enum SwFallbackStatus { FALLBACK SUCCESSFUL, FALLBACK UNSUCCESSFUL };
struct NeListEntry
   SwMIRPConstDefs::NEIdentification nEIdentification;
   SwMIRPConstDefs::SwFallbackStatus swFallbackStatus;
typedef sequence<NeListEntry> NeList;
typedef string SwVersionToBeInstalled;
SwVersionToBeInstalledConditional is a type carrying a conditional parameter.
The boolean shall be TRUE, if the condition described in TS 32.532 is fulfilled.
In this case the value is present. Otherwise the value may be absent.
union SwVersionToBeInstalledConditional switch (boolean)
{
   case TRUE: SwVersionToBeInstalled value;
enum NameOfStep
SW_DOWNLOAD,
SW_INSTALLATION,
SW_ACTIVATION,
PREPARE_BASIC_CONFIGURATION_AND_OAMLINK, RETRIEVE_CONFIGURATION_DATA,
SETUP PRECONFIGURED SIGNALLING LINKS,
SET FINAL STATE OF NE
};
The following values are not used in SWM IRP, but only in inheriting Self-Conf IRP TS 32.502:
PREPARE_BASIC_CONFIGURATION_AND_OAMLINK,
RETRIEVE CONFIGURATION DATA,
SETUP PRECONFIGURED SIGNALLING LINKS,
SET_FINAL_STATE_OF_NE
*/
*/
typedef unsigned short SequenceNumberInProcess;
enum StopPointCanBeSetBeforeThisStep { YES, NO };
struct StepsAndOfferedStopPointListEntry
   SwMIRPConstDefs::NameOfStep nameOfStep;
   SwMIRPConstDefs::SequenceNumberInProcess sequenceNumberInProcess;
   SwMIRPConstDefs::StopPointCanBeSetBeforeThisStep stopPointCanBeSetBeforeThisStep
   };
typedef sequence<StepsAndOfferedStopPointListEntry> StepsAndOfferedStopPointList;
enum StopPointSetIndication { STOP_POINT_IS_SET_BEFORE_THIS_STEP, STOP_POINT_IS NOT SET };
```

```
struct StepAndSelectedStopPointListEntry
      SwMIRPConstDefs::NameOfStep nameOfStep;
     SwMIRPConstDefs::SequenceNumberInProcess sequenceNumberInProcess;
     SwMIRPConstDefs::StopPointSetIndication stopPointSetIndication
   typedef sequence<StepAndSelectedStopPointListEntry> StepAndSelectedStopPointList;
   enum StepProgress { NOT_YET_STARTED, RUNNING, COMPLETED, AWAITING_RESUME, FAILURE, TERMINATED };
   struct StepInfoListEntry
      SwMIRPConstDefs::NameOfStep nameOfStep;
      SwMIRPConstDefs::SequenceNumberInProcess sequenceNumberInProcess;
     SwMIRPConstDefs::StopPointSetIndication stopPointSetIndication;
      SwMIRPConstDefs::StepProgress stepProgress;
      };
   typedef sequence<StepInfoListEntry> StepInfoList;
   struct SwMProcessListEntry
      SwMIRPConstDefs::Id id;
      SwMIRPConstDefs::NEIdentification nEIdentification;
     SwMIRPConstDefs::StepInfoList stepInfoList;
      };
   typedef sequence<SwMProcessListEntry> SwMProcessList;
   enum FinalAdministrativeStateValue { LOCKED, UNLOCKED, DETERMINED_BY_CONFIGURATION_DATA };
  typedef FinalAdministrativeStateValue OfferedFinalAdministrativeStateValue
   typedef sequence<OfferedFinalAdministrativeStateValue>
OfferedFinalAdministrativeStateInformation;
   typedef FinalAdministrativeStateValue SelectedFinalAdministrativeStateValue
  typedef sequence<SwVersionToBeInstalled> SwVersionToBeInstalledOfferList;
   SwVersionToBeInstalledOfferListConditional is a type carrying a conditional parameter.
   The boolean shall be TRUE, if the condition described in TS 32.532 is fulfilled.
   In this case the value is present. Otherwise the value may be absent.
  union SwVersionToBeInstalledOfferListConditional switch (boolean)
      case TRUE: SwVersionToBeInstalledOfferList value;
   typedef unsigned short VersionNumber;
   struct ProfileId
      SwMIRPConstDefs::Id id;
      SwMIRPConstDefs::VersionNumber versionNumber;
      };
   struct SwMCapability
      SwMIRPConstDefs::Id id;
      SwMIRPConstDefs::NEInformation nEInformation;
      {\tt SwMIRPConstDefs::StepsAndOfferedStopPointList\ stepsAndOfferedStopPointList;}
      {\tt SwMIRPC} on {\tt stDefs::} Offered {\tt FinalAdministrativeStateInformation}
offeredFinalAdministrativeStateInformation;
      {\tt SwMIRPConstDefs::SwVersionToBeInstalledOfferListConditional\ swVersionToBeInstalledOfferList;}
      };
```

```
typedef sequence<SwMCapability> SwMCapabilitiesList;
   struct SwMProfile
      SwMIRPConstDefs::Id id;
      SwMIRPConstDefs::VersionNumber versionNumber;
      SwMIRPConstDefs::NEInformation nEInformation;
      {\tt SwMIRPConstDefs::StepsAndSelectedStopPointList\ stepsAndSelectedStopPointList;}
      SwMIRPConstDefs::SelectedFinalAdministrativeStateValue selectedFinalAdministrativeState;
      SwMIRPConstDefs::SwVersionToBeInstalledConditional swVersionToBeInstalled;
      };
   typedef sequence<SwMProfile> SwMProfilesList;
/***************************
/* definition of types in notifications for software management : */
   typedef string Filter;
  typedef string NeAndSWVersion;
   enum TriggerForDeletion { IRP AGENT TERMINATION, IRP MANAGER TERMINATION,
AUTOMATED_SWM_SUCCESFULLY_CONCLUDED, SELF_CONFIGURATION_SUCCESFULLY_CONCLUDED };
   The following values are not used in SWM IRP, but only in inheriting Self-Conf IRP TS 32.502:
   SELF_CONFIGURATION_SUCCESFULLY_CONCLUDED
interface AttributeNameValue
   const string ID = "ID";
   const string VERSION NUMBER = "VERSION NUMBER";
  const string NE INFORMATION = "NE INFORMATION";
  const string SW_VERSION_TO_BE_INSTALLED = "SW_VERSION_TO_BE_INSTALLED";
const string STEPS_AND_SELECTED_STOP_POINT_LIST = "STEPS_AND_SELECTED_STOP_POINT_LIST";
   const string SELECTED FINAL ADMINISTRATIVE STATE = "SELECTED FINAL ADMINISTRATIVE STATE";
   const string NE IDENTIFICATION = "NE IDENTIFICATION";
  const string PROFILE_ID = "PROFILE_ID";
const string MATCHING_NE_INFORMATION = "MATCHING_NE_INFORMATION";
   const string STEP_INFO_LIST = "STEP_INFO_LIST";
   const string NE_AND_SW_VERSION = "NE_AND_SW_VERSION";
   const string TRIGGER_FOR_DELETION = "TRIGGER FOR DELETION";
   const string ADDITIONAL_INFORMATION = "ADDITIONAL_INFORMATION";
};
#endif // SWM IRP CONST DEFS IDL
```

A.2 IDL specification (file name "SwMIRPSystem.idl")

```
//File: SwMIRPSystem.idl
#ifndef _SWM_IRP_SYSTEM_IDL_
#define _SWM_IRP_SYSTEM_IDL_
#include <SwMIRPConstDefs.idl>
#include <GenericIRPManagementSystem.idl>
// This statement must appear after all include statements
#pragma prefix "3qppsa5.org"
/* ## Module: SwMIRPSystem */
module SwMIRPSystem
   If the system fails to complete an operation, then it can provide a reason
   to qualify the exception. The semantics carried in this reason are outside
   the scope of the present document.
   exception ListSwMCapabilities { string reason; };
   exception ListSwMProfiles { string reason; };
   exception CreateSwMProfile { string reason; };
exception DeleteSwMProfile { string reason; };
   exception ListSwMProcesses { string reason; };
exception ResumeSwMProcess { string reason; };
   exception SwFallback { string reason; };
   exception TerminateSwMProcess { string reason; };
   exception ChangeSwMProfile { string reason; };
   interface SwMIRPOperations 1
       /\star for the purpose of this operation see 3GPP TS 32.532 \star/
      SwMIRPConstDefs::Result listSwMCapabilities
         in SwMIRPConstDefs::NEInformation nEInformation,
         out SwMIRPConstDefs::SwMCapabilitiesList capabilitiesList
      raises
         ListSwMCapabilities,
         GenericIRPManagementSystem::ParameterNotSupported,
         GenericIRPManagementSystem::InvalidParameter,
         GenericIRPManagementSystem::ValueNotSupported,
         {\tt GenericIRPManagementSystem::OperationNotSupported}
      /* for the purpose of this operation see 3GPP TS 32.532 */
      SwMIRPConstDefs::Result listSwMProfiles
         in SwMIRPConstDefs::NEInformation nEInformation,
         out SwMIRPConstDefs::SwMProfileList profileList
      raises
         ListSwMProfiles,
         GenericIRPManagementSystem::ParameterNotSupported,
         GenericIRPManagementSystem::InvalidParameter,
         GenericIRPManagementSystem::ValueNotSupported,
         GenericIRPManagementSystem::OperationNotSupported
      /* for the purpose of this operation see 3GPP TS 32.532 */
      SwMIRPConstDefs::Result createSWMProfile
         in SwMIRPConstDefs::IdOpt id,
         in SwMIRPConstDefs::NEInformation nEInformation,
         in SwMIRPConstDefs::SwVersionToBeInstalledConditional swVersionToBeInstalled,
         in SwMIRPConstDefs::StepsAndSelectedStopPointList stepsAndSelectedStopPointList,
         in SwMIRPConstDefs::SelectedFinalAdministrativeState selectedFinalAdministrativeState
```

```
raises
   (
   CreateSWMProfile,
   GenericIRPManagementSystem::ParameterNotSupported,
   GenericIRPManagementSystem::InvalidParameter,
   GenericIRPManagementSystem:: ValueNotSupported,
  {\tt GenericIRPM} an agement {\tt System::OperationNotSupported}
/* for the purpose of this operation see 3GPP TS 32.532 */
SwMIRPConstDefs::Result deleteSWMProfile
   in SwMIRPConstDefs::Id id
raises
   DeleteSWMProfile,
   GenericIRPManagementSystem::ParameterNotSupported,
   GenericIRPManagementSystem::InvalidParameter,
   GenericIRPManagementSystem::ValueNotSupported,
   GenericIRPManagementSystem::OperationNotSupported
/\ast for the purpose of this operation see 3GPP TS 32.532 \ast/
SwMIRPConstDefs::Result listSwMProcesses
   in SwMIRPConstDefs::NEIdentificationOpt nEIdentification,
   out SwMIRPConstDefs::ProcessList processList
raises
   ListSwMProcesses,
   GenericIRPManagementSystem::ParameterNotSupported,
   GenericIRPManagementSystem::InvalidParameter,
   GenericIRPManagementSystem::ValueNotSupported,
  GenericIRPManagementSystem::OperationNotSupported
/* for the purpose of this operation see 3GPP TS 32.532 */
SwMIRPConstDefs::Result resumeSwMProcess
   in SwMIRPConstDefs::Id id,
   in SwMIRPConstDefs::NameOfStep startStepName
raises
   (
   ResumeSwMProcess,
   GenericIRPManagementSystem::ParameterNotSupported,
   GenericIRPManagementSystem::InvalidParameter,
   GenericIRPManagementSystem:: ValueNotSupported,
   GenericIRPManagementSystem::OperationNotSupported
/* for the purpose of this operation see 3GPP TS 32.532 */
SwMIRPConstDefs::Result swFallback
   in SwMIRPConstDefs::Filter filter,
   out SwMIRPConstDefs::NEList nEList
raises
   SwFallback,
   GenericIRPManagementSystem::ParameterNotSupported,
   GenericIRPManagementSystem::InvalidParameter,
   GenericIRPManagementSystem::ValueNotSupported,
   GenericIRPManagementSystem::OperationNotSupported
   );
/\star for the purpose of this operation see 3GPP TS 32.532 \star/
SwMIRPConstDefs::Result terminateSwMProcess
   in SwMIRPConstDefs::Id id
```

```
raises
                                            (
                                          TerminateSwMProcess,
                                          {\tt GenericIRPManagementSystem::ParameterNotSupported,}
                                           GenericIRPManagementSystem::InvalidParameter,
                                          GenericIRPManagementSystem::ValueNotSupported,
                                          GenericIRPManagementSystem::OperationNotSupported
              };
              interface SwMIRPOperations 2
                             /* for the purpose of this operation see 3GPP TS 32.532 */
                             SwMIRPConstDefs::Result changeSWMProfile
                                           in SwMIRPConstDefs::Id id,
                                           in SwMIRPConstDefs::NEInformation nEInformation,
                                           in SwMIRPConstDefs::SwVersionToBeInstalledConditional swVersionToBeInstalled,
                                           \hbox{in SwMIRPConstDefs::} Steps And Selected Stop Point List steps And Selected Stop Point List, and the step Selected Stop Point List steps And Selected Stop Point List, and the step Selected Stop Point List steps And Selected Stop Point List step Selected Stop Selected Stop Point List step Selected Stop 
                                           \hbox{in SwMIRPC} on stDefs:: Selected Final Administrative State se
                                           out SwMIRPConstDefs::VersionNumber versionNumber
                                          out SwMIRPConstDefs::ConflictingProfileIdConditional conflictingProfileId
                             raises
                                           ChangeSWMProfile,
                                           GenericIRPManagementSystem::ParameterNotSupported,
                                           GenericIRPManagementSystem::InvalidParameter,
                                           GenericIRPManagementSystem::ValueNotSupported,
                                           GenericIRPManagementSystem::OperationNotSupported
              };
};
#endif // _SWM_IRP_SYSTEM_IDL_
```

A.3 IDL specification (file name "SwMIRPNotifications.idl")

```
//File: SwMIRPNotifications.idl
#ifndef _SWM_IRP_NOTIFICATIONS_IDL_
#define SWM IRP NOTIFICATIONS IDL
#include <SwMIRPConstDefs.idl>
#include <NotificationIRPNotifications.idl>
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
/* ## Module: SwMIRPNotifications
This contains the specification of notifications of Software Management.
______
module SwMIRPNotifications
   /* Constant definitions for the notifySwMProfileCreation notification */
   interface NotifySwMProfileCreation: NotificationIRPNotifications::Notify
      const string EVENT_TYPE = "notifySwMProfileCreation";
      * This constant defines the name of the Id property,
      * which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::Id.
      const string ID =
        SwMIRPConstDefs::AttributeNameValue::ID;
      * This constant defines the name of the VersionNumber property,
      * which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::VersionNumber.
      const string VERSION NUMBER =
        SwMIRPConstDefs::AttributeNameValue::VERSION NUMBER;
      * This constant defines the name of the NEInformation property,
      \mbox{*} which is transported in the filterable_body_fields.
      \star The data type for the value of this property is
      * SwMIRPConstDefs::NEInformation.
      const string NE INFORMATION =
         SwMIRPConstDefs::AttributeNameValue::NE INFORMATION;
      * This constant defines the name of the SwVersionToBeInstalled property,
      \mbox{*} which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::SwVersionToBeInstalledConditional.
      const string SW_VERSION_TO_BE_INSTALLED =
         SwMIRPConstDefs::AttributeNameValue::SW_VERSION_TO_BE_INSTALLED;
      * This constant defines the name of the StepsAndSelectedStopPointList property,
      * which is transported in the remaining_body.
      * The data type for the value of this property is
      * SwMIRPConstDefs::StepsAndSelectedStopPointList.
      const string STEPS AND SELECTED STOP POINT LIST =
        SwMIRPConstDefs::AttributeNameValue::STEPS_AND_SELECTED_STOP_POINT_LIST;
      * This constant defines the name of the SelectedFinalAdministrativeState property,
```

```
* which is transported in the remaining_body.
   * The data type for the value of this property is
   * SwMIRPConstDefs::SelectedFinalAdministrativeState.
   const string SELECTED FINAL ADMINISTRATIVE STATE =
     SwMIRPConstDefs::AttributeNameValue::SELECTED FINAL ADMINISTRATIVE STATE;
};
/* Constant definitions for the notifySwMProfileDeletion notification */
interface NotifySwMProfileDeletion: NotificationIRPNotifications::Notify
   const string EVENT TYPE = "notifySwMProfileDeletion";
   * This constant defines the name of the Id property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * SwMIRPConstDefs::Id.
   const string ID =
     SwMIRPConstDefs::AttributeNameValue::ID;
};
/* Constant definitions for the notifySwMProcessCreation notification */
interface NotifySwMProcessCreation: NotificationIRPNotifications::Notify
   const string EVENT TYPE = "notifySwMProcessCreation";
   * This constant defines the name of the Id property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * SwMIRPConstDefs::Id.
   * /
   const string ID =
     SwMIRPConstDefs::AttributeNameValue::ID;
   * This constant defines the name of the NEIdentification property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * SwMIRPConstDefs::NEIdentification.
   const string NE IDENTIFICATION =
     SwMIRPConstDefs::AttributeNameValue::NE IDENTIFICATION;
   * This constant defines the name of the ProfileId property,
   * which is transported in the remaining body.
   \boldsymbol{\ast} The data type for the value of this property is
   * SwMIRPConstDefs::ProfileId.
   const string PROFILE ID =
     SwMIRPConstDefs::AttributeNameValue::PROFILE ID;
   * This constant defines the name of the MatchingNEInformation property,
   * which is transported in the remaining body.
   \star The data type for the value of this property is
   * SwMIRPConstDefs::MatchingNEInformation.
   const string MATCHING NE INFORMATION =
      SwMIRPConstDefs::AttributeNameValue::MATCHING_NE_INFORMATION;
   * This constant defines the name of the StepInfoList property,
   * which is transported in the remaining body.
   * The data type for the value of this property is
   * SwMIRPConstDefs::StepInfoList.
   const string STEP INFO LIST =
      SwMIRPConstDefs::AttributeNameValue::STEP_INFO_LIST;
```

```
};
/* Constant definitions for the notifySwMProcessStage notification */
interface NotifySwMProcessStage: NotificationIRPNotifications::Notify
   const string EVENT_TYPE = "notifySwMProcessStage";
  /**
   * This constant defines the name of the Id property,
   * which is transported in the filterable_body_fields.
   * The data type for the value of this property is
   * SwMIRPConstDefs::Id.
   const string ID =
     SwMIRPConstDefs::AttributeNameValue::ID;
   * This constant defines the name of the StepInfoList property,
   \star which is transported in the remaining_body.
   * The data type for the value of this property is
   * SwMIRPConstDefs::StepInfoList.
   const string STEP INFO LIST =
     SwMIRPConstDefs::AttributeNameValue::STEP INFO LIST;
};
/* Constant definitions for the notifySwMProcessDeletion notification */
interface NotifySwMProcessDeletion: NotificationIRPNotifications::Notify
   const string EVENT TYPE = "notifySwMProcessDeletion";
   * This constant defines the name of the Id property,
   * which is transported in the filterable_body_fields.
   * The data type for the value of this property is
   * SwMIRPConstDefs::Id.
   */
   const string ID =
     SwMIRPConstDefs::AttributeNameValue::ID;
   * This constant defines the name of the TriggerForDeletion property,
   * which is transported in the remaining body.
   * The data type for the value of this property is
   * SwMIRPConstDefs::TriggerForDeletion.
   const string ID =
     SwMIRPConstDefs::AttributeNameValue::TRIGGER FOR DELETION;
   \star This constant defines the name of the AdditionalInformation property,
   * which is transported in the remaining_body.
   * The data type for the value of this property is
   * SwMIRPConstDefs::AdditionalInformationOptional.
   const string ID =
     SwMIRPConstDefs::AttributeNameValue::ADDITIONAL INFORMATION;
};
/* Constant definitions for the notifyNewSwAvailability notification */
interface NotifyNewSwAvailability: NotificationIRPNotifications::Notify
  const string EVENT TYPE = "notifyNewSwAvailability";
   * This constant defines the name of the NEandSWversion property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * SwMIRPConstDefs::NEandSWversion.
```

```
const string NE AND SW VERSION =
         SwMIRPConstDefs::AttributeNameValue::NE AND SW VERSION;
   };
   /* Constant definitions for the notifySwMProfileChange notification */
   interface NotifySwMProfileChange: NotificationIRPNotifications::Notify
      const string EVENT TYPE = "notifySwMProfileChange";
      * This constant defines the name of the Id property,
      * which is transported in the filterable body fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::Id.
      const string ID =
         SwMIRPConstDefs::AttributeNameValue::ID;
      * This constant defines the name of the VersionNumber property,
      * which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::VersionNumber.
      const string VERSION NUMBER =
        SwMIRPConstDefs::AttributeNameValue::VERSION NUMBER;
      * This constant defines the name of the NEInformation property,
      * which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::NEInformation.
      const string NE INFORMATION =
         SwMIRPConstDefs::AttributeNameValue::NE INFORMATION;
      * This constant defines the name of the SwVersionToBeInstalled property,
      \mbox{*} which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::SwVersionToBeInstalledConditional.
      const string SW VERSION TO BE INSTALLED =
         SwMIRPConstDefs::AttributeNameValue::SW VERSION TO BE INSTALLED;
      * This constant defines the name of the StepsAndSelectedStopPointList property,
      * which is transported in the filterable_body_fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::StepsAndSelectedStopPointList.
      const string STEPS_AND_SELECTED_STOP_POINT_LIST =
         SwMIRPConstDefs::AttributeNameValue::STEPS_AND_SELECTED_STOP_POINT_LIST;
      * This constant defines the name of the SelectedFinalAdministrativeState property,
      * which is transported in the filterable body fields.
      * The data type for the value of this property is
      * SwMIRPConstDefs::SelectedFinalAdministrativeState.
      const string SELECTED_FINAL_ADMINISTRATIVE_STATE =
         SwMIRPConstDefs::AttributeNameValue::SELECTED FINAL ADMINISTRATIVE STATE;
   };
};
#endif // _SWM_IRP_NOTIFICATIONS_IDL_
```

Annex B (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2008-12	SP-42	SP-080718			Submitted to SA#42 for information and approval	1.0.0	8.0.0
2009-06	SP-44	SP-090408	001		Add missing start step parameter for resume operation	8.0.0	8.1.0
2009-12	SP-46	SP-090718	011		Remove inconsistent notification parameter	8.1.0	8.2.0

History

Document history				
V8.0.0	February 2009	Publication		
V8.1.0	July 2009	Publication		
V8.2.0	February 2010	Publication		