

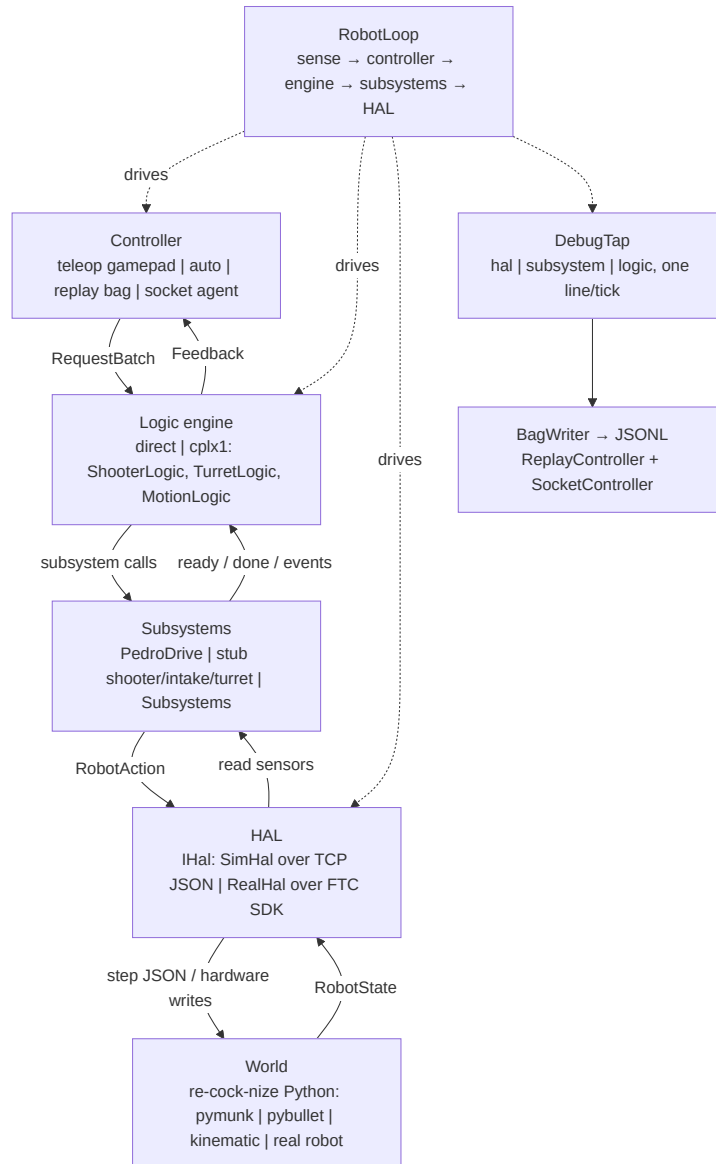


Figure 1: Diagram 1

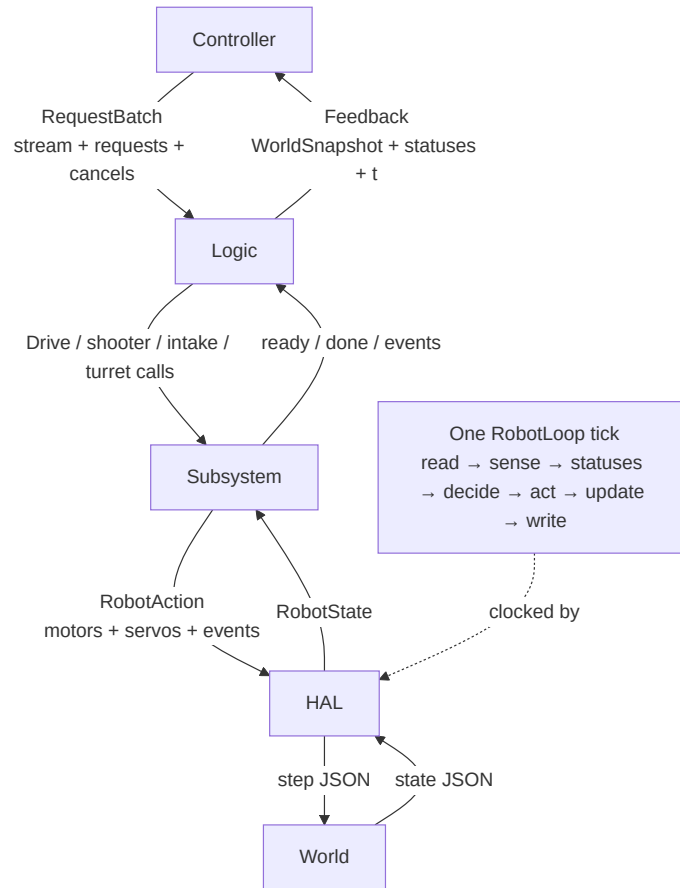


Figure 2: Diagram 2

Seam records



Figure 3: Diagram 3

The immutable records are the only cross-layer vocabulary. `PATH` alone carries `PathRequest`; `CANCEL_ALL` is `Integer.MIN_VALUE`.

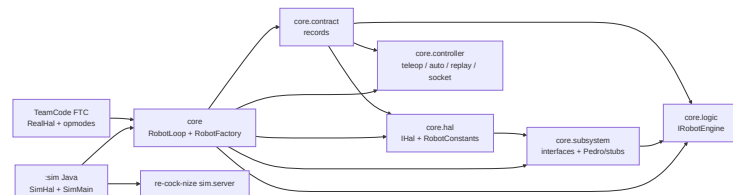
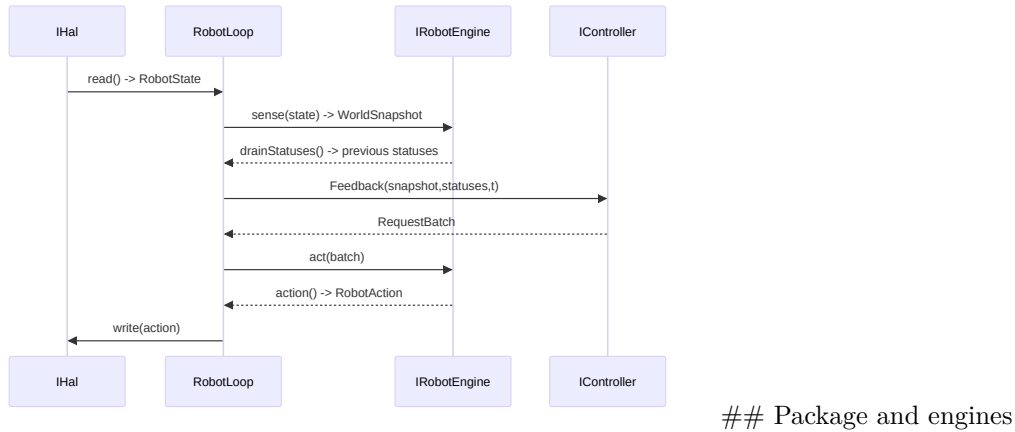


Figure 4: Diagram 5


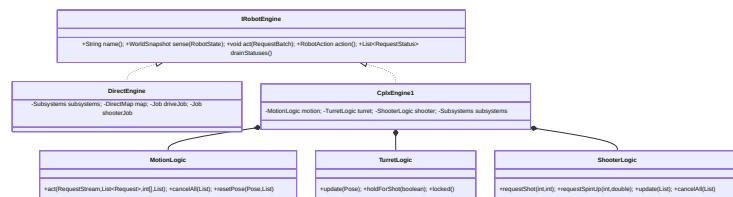


Figure 5: Diagram 6

Direct maps each edge request with `DirectMap`; `cplx1` delegates policy to three logic modules over one `Subsystems` record.

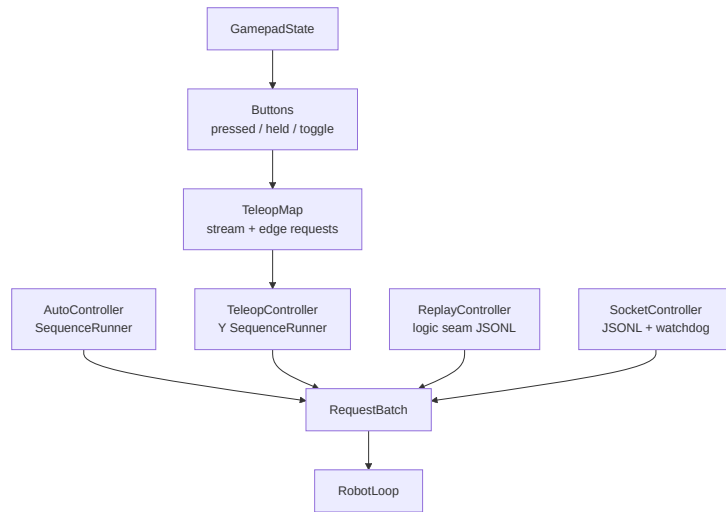

Requests and arbitration

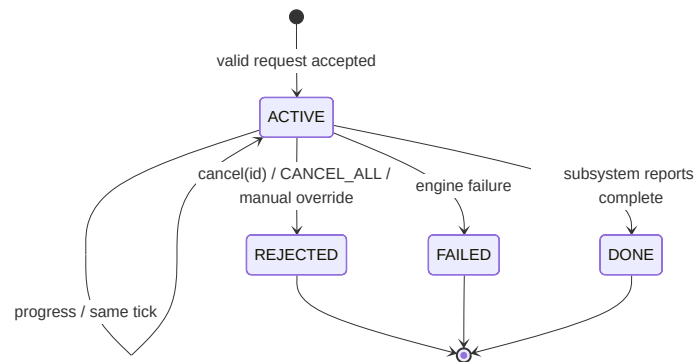


Figure 6: Diagram 8

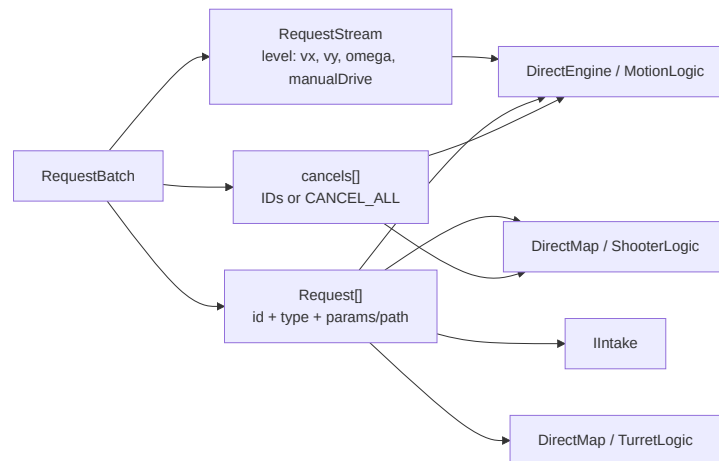


Figure 7: Diagram 9

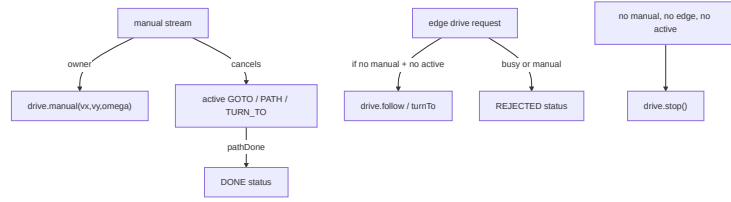


Figure 8: Diagram 10

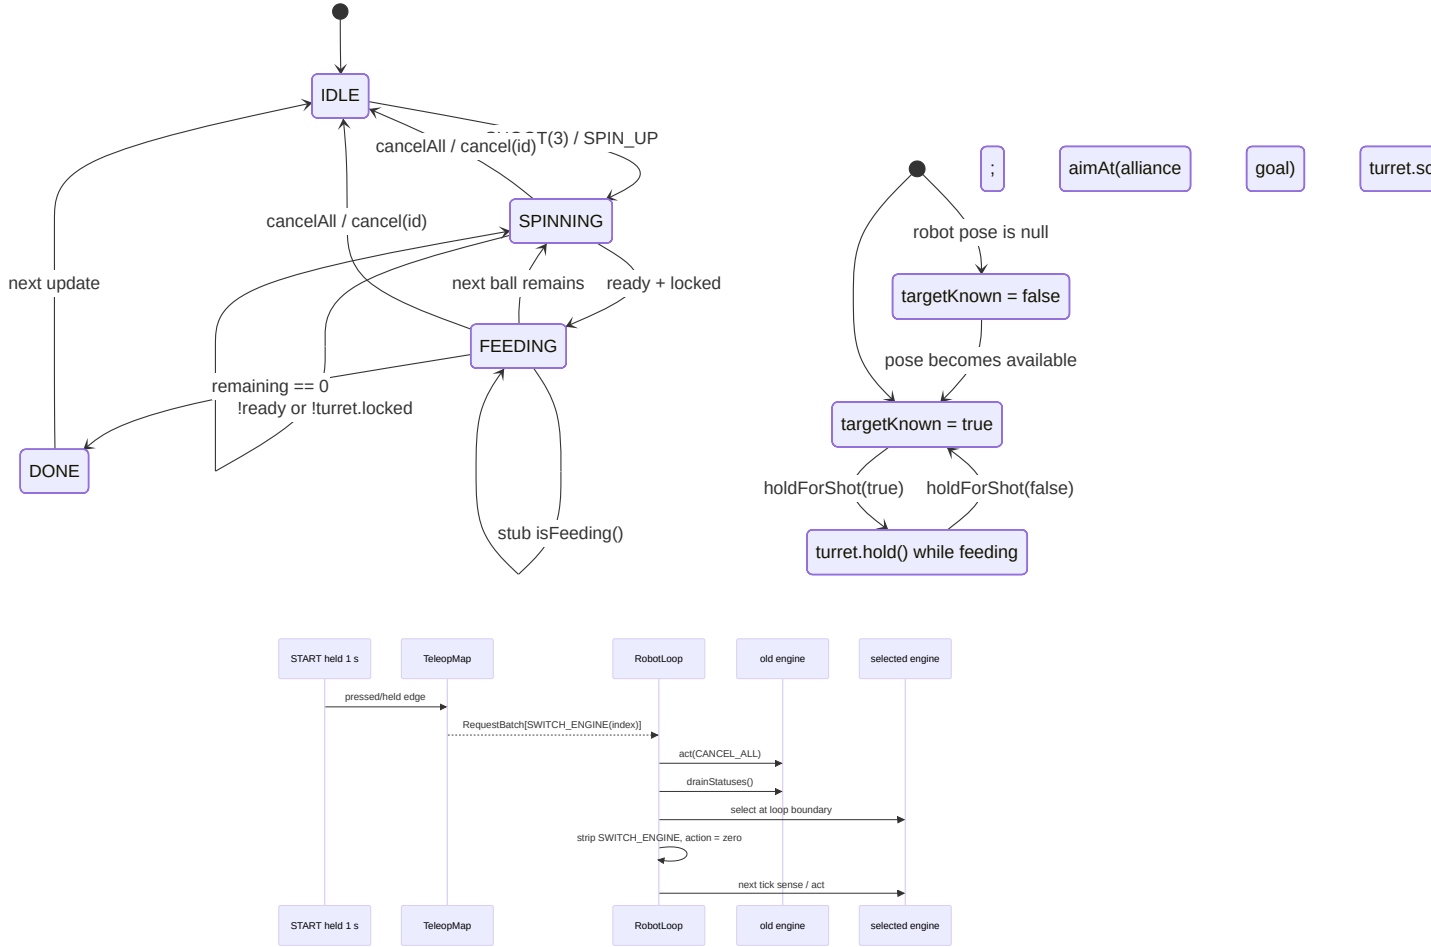


Figure 9: Diagram 13

The factory orders index 0 = `direct`, index 1 = `cplx1`; switch statuses are made by `RobotLoop` and are visible one tick later.




Figure 10: Diagram 14

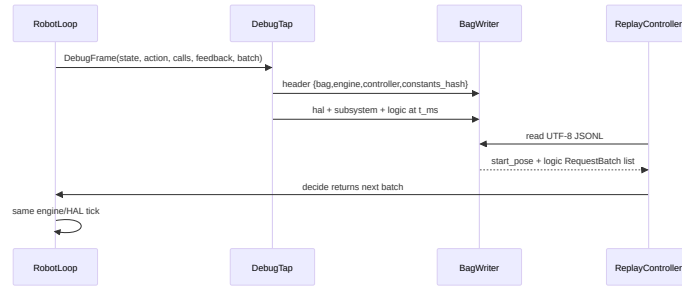


Figure 11: Diagram 15

Debug seams

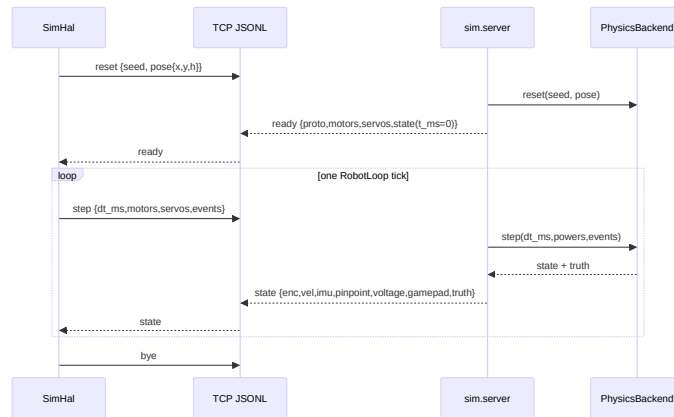
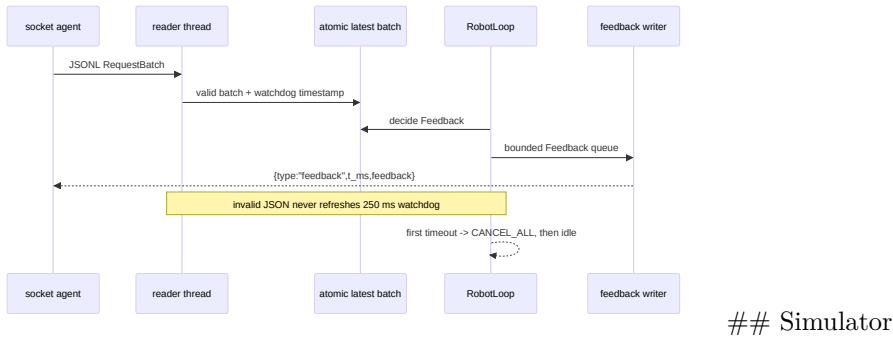


Figure 12: Diagram 17

Boundaries at a glance

The poster intentionally leaves no policy in the HAL and no hardware knowledge in controllers; records and arrows are the contract.

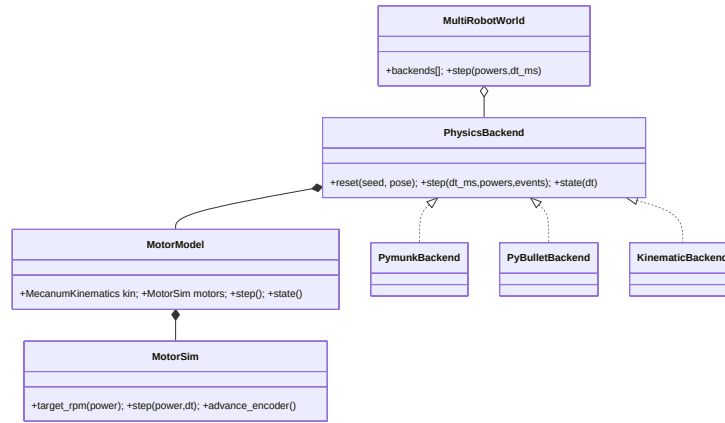


Figure 13: Diagram 18

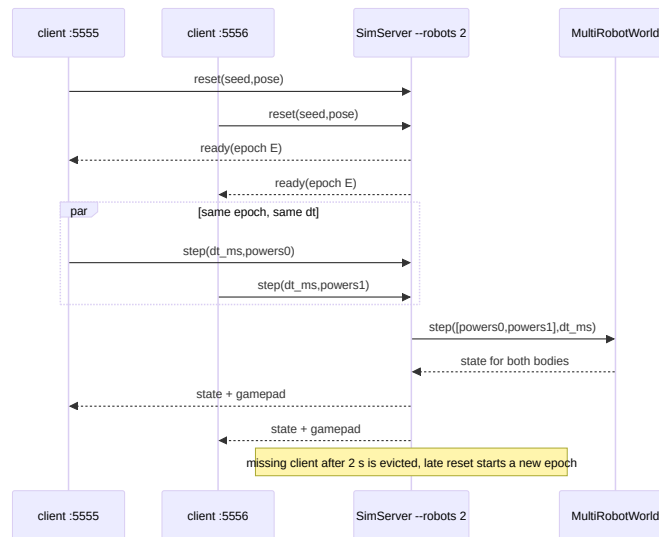


Figure 14: Diagram 19

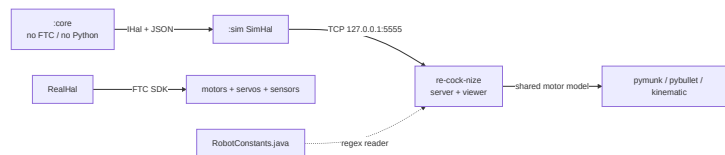


Figure 15: Diagram 20

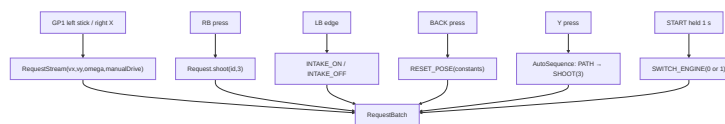


Figure 16: Diagram 21