

1 R Markdown介绍

1.1 Overview

1.2 Quick Start

2 手把手演练

3 可能遇到的问题

4 First Assignment

[Code ▼](#)

Chapter 1: Brief Introduction to R Markdown

Author: Shane

Last update: 10 September, 2019


1 R Markdown介绍

1.1 Overview

R Markdown combines markdown (an easy to write plain text format) with embedded R code chunks. When compiling R Markdown documents, the code components can be evaluated so that both the code and its output can be included in the final document. This makes analysis reports highly reproducible by allowing to automatically regenerate them when the underlying R code or data changes. R Markdown documents (`.Rmd` files) can be rendered to various formats including HTML and PDF. The R code in an `.Rmd` document is processed by `knitr`, while the resulting `.md` file is rendered by `pandoc` to

the final output formats (e.g. HTML or PDF). Historically, R Markdown is an extension of the older `Sweave`/`Latex` environment. Rendering of mathematical expressions and reference management is also supported by R Markdown using embedded `Latex` syntax and `Bibtex`, respectively.

R markdown works by using 'Chunks'. 3 sections are required at the beginning. Section 1 is the title, name, and date section. Section 2 is a chunk. It sets the options for the document. Section 3 is a chunk. It sets the libraries required for the code to work. Everything else outside of the chunk is just plain text in paragraph form, or bullets, or numbered sections like you see here.

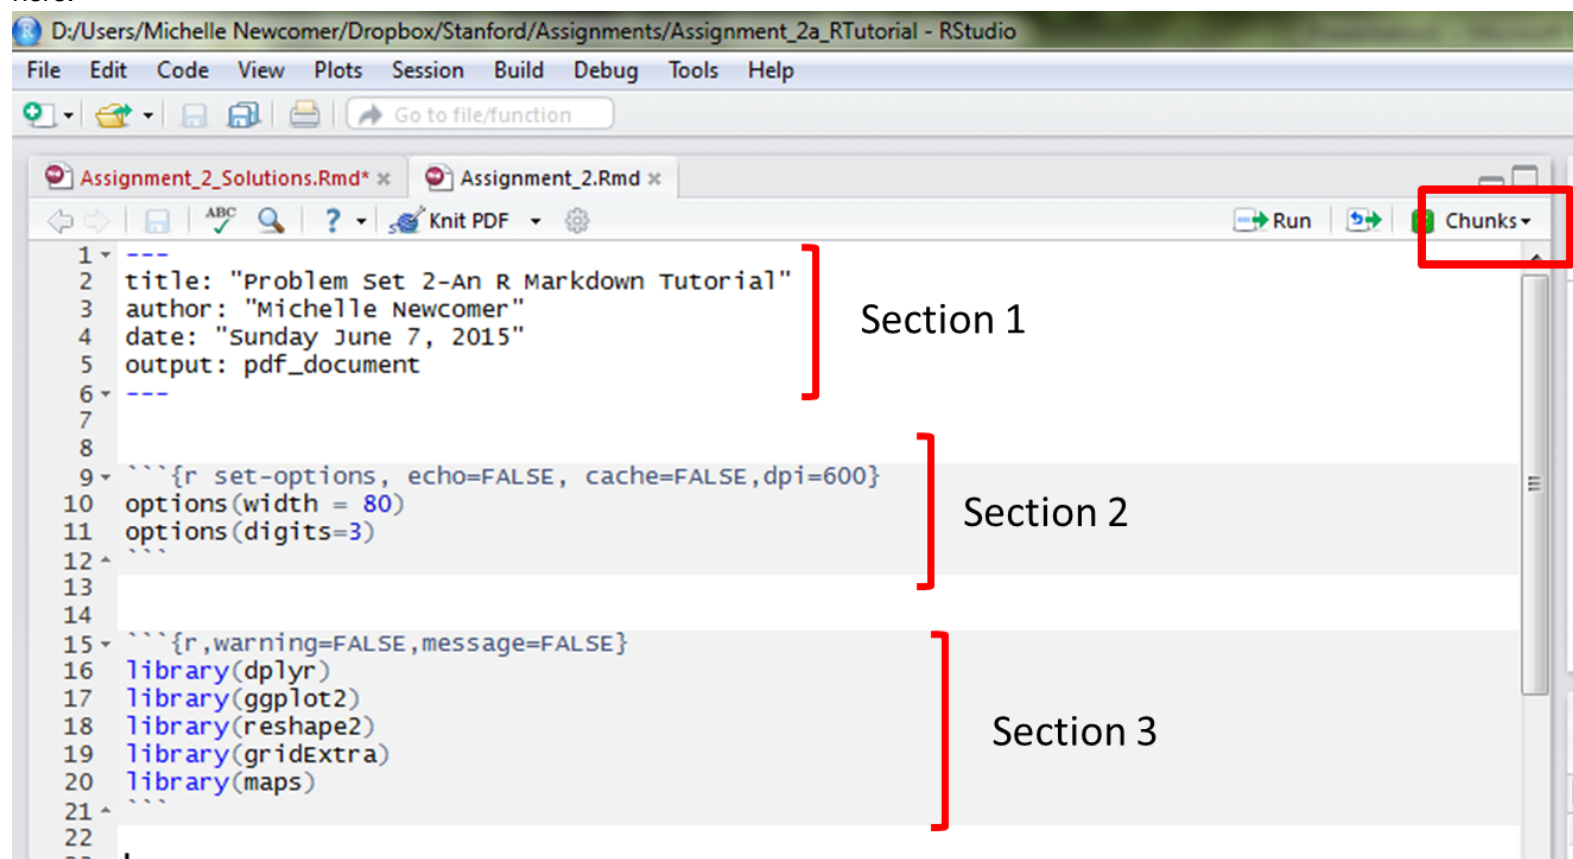

1.2 Quick Start

1.2.1 Install R Markdown

[Hide](#)

```
install.packages("rmarkdown")
```

1.2.2 Initialize a new R Markdown (Rmd) script

To minimize typing, it can be helpful to start with an R Markdown template and then modify it as needed. Note the file name of an R Markdown script needs to have the extension `.Rmd`. Template files for the following examples are available here:

- R Markdown sample script: `sample.Rmd` (https://raw.githubusercontent.com/tgirke/GEN242/gh-pages/_vignettes/07_Rbasics/sample.Rmd)
- Bibtex file for handling citations and reference section: `bibtex.bib` (https://raw.githubusercontent.com/tgirke/GEN242/gh-pages/_vignettes/07_Rbasics/bibtex.bib)

Users want to download these files, open the `sample.Rmd` file with their preferred R IDE (e.g. RStudio, vim or emacs), initialize an R session and then direct their R session to the location of these two files.

1.2.3 Metadata section

The metadata section (YAML header) in an R Markdown script defines how it will be processed and rendered. The metadata section also includes both title, author, and date information as well as options for customizing the output format. For instance, PDF and HTML output can be defined with `pdf_document` and `html_document`, respectively. The `BiocStyle::` prefix will use the formatting style of the `BiocStyle` (<http://bioconductor.org/packages/release/bioc/html/BiocStyle.html>) package from Bioconductor.

```
---
title: "My First R Markdown Document"
author: "Author: First Last"
date: "Last update: 10 September, 2019"
output:
  BiocStyle::html_document:
    toc: true
    toc_depth: 3
    fig_caption: yes

fontsize: 14pt
bibliography: bibtex.bib
---
```

1.2.4 Render Rmd script

An R Markdown script can be evaluated and rendered with the following `render` command or by pressing the `knit` button in RStudio. The `output_format` argument defines the format of the output (e.g. `html_document`). The setting `output_format="all"` will generate all supported output formats. Alternatively, one can specify several output formats in the metadata section as shown in the above example.

[Hide](#)

```
rmarkdown::render("sample.Rmd", clean=TRUE, output_format="html_document")
```

The following shows two options how to run the rendering from the command-line.

```
$ Rscript -e "rmarkdown::render('sample.Rmd', clean=TRUE)"
```

Alternatively, one can use a Makefile to evaluate and render an R Markdown script. A sample Makefile for rendering the above `sample.Rmd` can be downloaded [here](https://raw.githubusercontent.com/tgirke/GEN242/gh-pages/_vignettes/07_Rbasics/Makefile) (https://raw.githubusercontent.com/tgirke/GEN242/gh-pages/_vignettes/07_Rbasics/Makefile). To apply it to a custom `Rmd` file, one needs open the Makefile in a text editor and

change the value assigned to `MAIN` (line 13) to the base name of the corresponding `.Rmd` file (e.g. assign `systemPipeRNAseq` if the file name is `systemPipeRNAseq.Rmd`). To execute the `Makefile`, run the following command from the command-line.

```
$ make -B
```

1.2.5 R code chunks

R Code Chunks can be embedded in an R Markdown script by using three backticks at the beginning of a new line along with arguments enclosed in curly braces controlling the behavior of the code. The following lines contain the plain R code. A code chunk is terminated by a new line starting with three backticks. The following shows an example of such a code chunk. Note the backslashes are not part of it. They have been added to print the code chunk syntax in this document.

```
```\{r code_chunk_name, eval=FALSE\}  
x <- 1:10
```
```

The following lists the most important arguments to control the behavior of R code chunks:

- `r` : specifies language for code chunk, here R
- `code_chunk_name` : name of code chunk; this name needs to be unique
- `eval` : if assigned `TRUE` the code will be evaluated
- `warning` : if assigned `FALSE` warnings will not be shown
- `message` : if assigned `FALSE` messages will not be shown
- `cache` : if assigned `TRUE` results will be cached to reuse in future rendering instances
- `fig.height` : allows to specify height of figures in inches
- `fig.width` : allows to specify width of figures in inches

For more details on code chunk options see here (<https://www.rstudio.com/wp-content/uploads/2015/03/rmarkdown-reference.pdf>).

1.2.6 Learning Markdown

The basic syntax of Markdown and derivatives like kramdown is extremely easy to learn. Rather than providing another introduction on this topic, here are some useful sites for learning Markdown:

- Markdown Intro on GitHub (<https://guides.github.com/features/mastering-markdown/>)
- Markdown Cheat Sheet (<https://github.com/adam-p/markdown-here/wiki/Markdown-Cheatsheet>)
- Markdown Basics from RStudio (http://rmarkdown.rstudio.com/authoring_basics.html)
- R Markdown Cheat Sheet (<http://www.rstudio.com/wp-content/uploads/2015/02/rmarkdown-cheatsheet.pdf>)
- kramdown Syntax (<http://kramdown.gettalong.org/syntax.html>)

1.2.7 Tables

There are several ways to render tables. First, they can be printed within the R code chunks. Second, much nicer formatted tables can be generated with the functions `kable`, `pander` or `xtable`. The following example uses `kable` from the `knitr` package.

[Hide](#)

```
library(knitr)
kable(iris[1:12,])
```

| Sepal.Length | Sepal.Width | Petal.Length | Petal.Width | Species |
|--------------|-------------|--------------|-------------|---------|
| 5.1 | 3.5 | 1.4 | 0.2 | setosa |
| 4.9 | 3.0 | 1.4 | 0.2 | setosa |
| 4.7 | 3.2 | 1.3 | 0.2 | setosa |
| 4.6 | 3.1 | 1.5 | 0.2 | setosa |
| 5.0 | 3.6 | 1.4 | 0.2 | setosa |
| 5.4 | 3.9 | 1.7 | 0.4 | setosa |
| 4.6 | 3.4 | 1.4 | 0.3 | setosa |
| 5.0 | 3.4 | 1.5 | 0.2 | setosa |

| Sepal.Length | Sepal.Width | Petal.Length | Petal.Width | Species |
|--------------|-------------|--------------|-------------|---------|
| 4.4 | 2.9 | 1.4 | 0.2 | setosa |
| 4.9 | 3.1 | 1.5 | 0.1 | setosa |
| 5.4 | 3.7 | 1.5 | 0.2 | setosa |
| 4.8 | 3.4 | 1.6 | 0.2 | setosa |

A much more elegant and powerful solution is to create fully interactive tables with the `DT` package (<https://rstudio.github.io/DT/>). This JavaScript based environment provides a wrapper to the DataTables library using jQuery. The resulting tables can be sorted, queried and resized by the user.

```
library(DT)
datatable(iris, filter = 'top', options = list(
  pageLength = 100, scrollX = TRUE, scrollY = "600px", autoWidth = TRUE
))
```

Show entries

Search:

| Sepal.Length | Sepal.Width | Petal.Length | Petal.Width | Species |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------|
| <input type="text" value="All"/> | <input type="text" value="All"/> | <input type="text" value="All"/> | <input type="text" value="All"/> | <input type="text"/> |
| 1 | 5.1 | 3.5 | 1.4 | 0.2 setosa |
| 2 | 4.9 | 3 | 1.4 | 0.2 setosa |
| 3 | 4.7 | 3.2 | 1.3 | 0.2 setosa |
| 4 | 4.6 | 3.1 | 1.5 | 0.2 setosa |

| | | | | | |
|----|-----|-----|-----|-----|--------|
| 5 | 5 | 3.6 | 1.4 | 0.2 | setosa |
| 6 | 5.4 | 3.9 | 1.7 | 0.4 | setosa |
| 7 | 4.6 | 3.4 | 1.4 | 0.3 | setosa |
| 8 | 5 | 3.4 | 1.5 | 0.2 | setosa |
| 9 | 4.4 | 2.9 | 1.4 | 0.2 | setosa |
| 10 | 4.9 | 3.1 | 1.5 | 0.1 | setosa |
| 11 | 5.4 | 3.7 | 1.5 | 0.2 | setosa |
| 12 | 4.8 | 3.4 | 1.6 | 0.2 | setosa |
| 13 | 4.8 | 3 | 1.4 | 0.1 | setosa |
| 14 | 4.3 | 3 | 1.1 | 0.1 | setosa |
| 15 | 5.8 | 4 | 1.2 | 0.2 | setosa |
| 16 | 5.7 | 4.4 | 1.5 | 0.4 | setosa |

Showing 1 to 100 of 150 entries

[Previous](#)

1


[2](#)[Next](#)

1.2.8 Figures

Plots generated by the R code chunks in an R Markdown document can be automatically inserted in the output file. The size of the figure can be controlled with the `fig.height` and `fig.width` arguments.

[Hide](#)


```
library(ggplot2)
dsmall <- diamonds[sample(nrow(diamonds), 1000), ]
ggplot(dsmall, aes(color, price/carat)) + geom_jitter(alpha = I(1 / 2), aes(color=color))
```

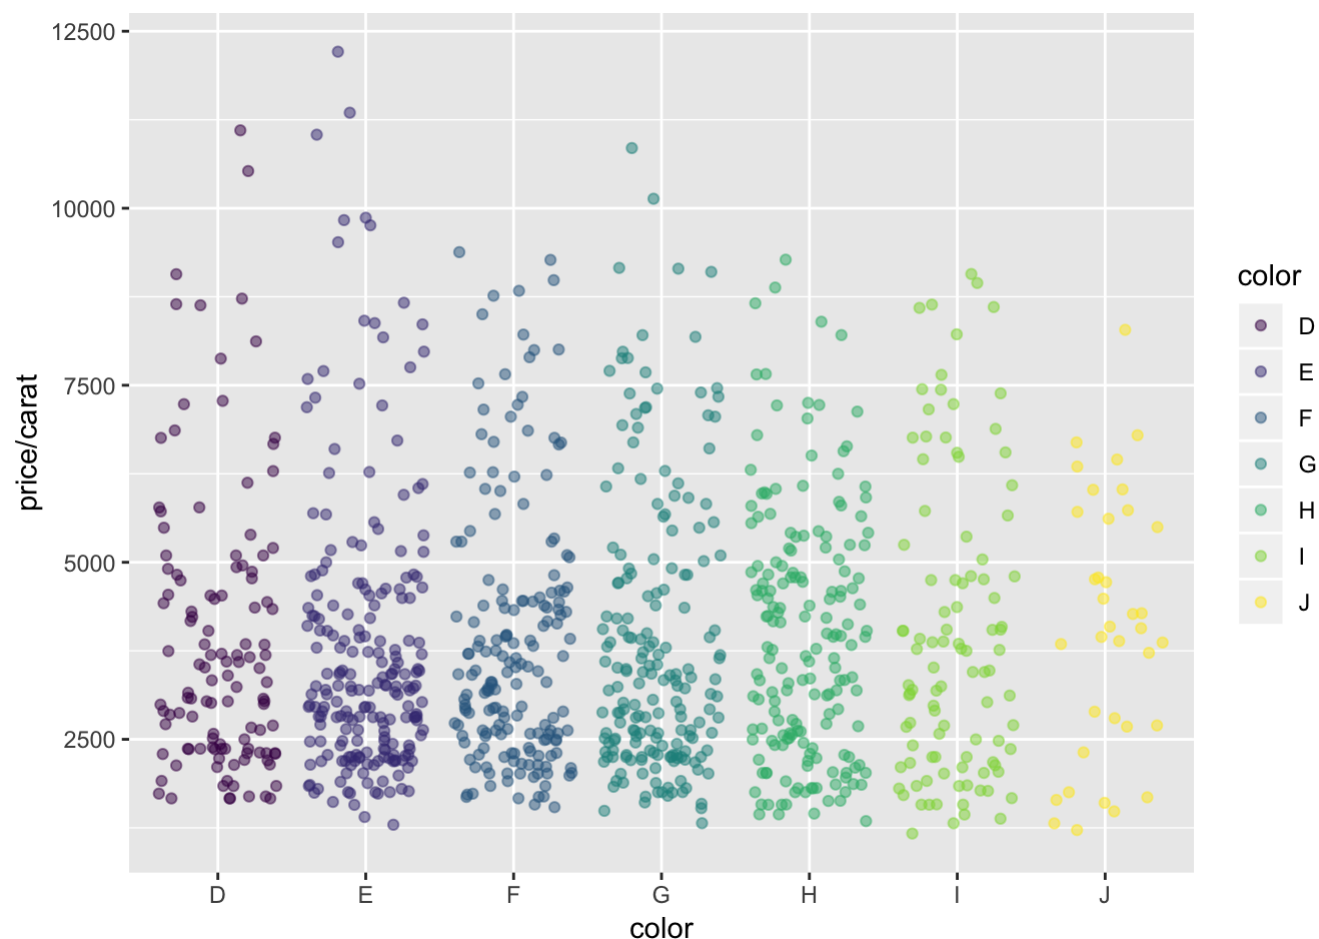


Sometimes it can be useful to explicitly write an image to a file and then insert that image into the final document by referencing its file name in the R Markdown source. For instance, this can be useful for time consuming analyses. The following code will generate a file named `myplot.png`. To insert the file in the final document, one can use standard Markdown or HTML syntax, e.g.: ``.

[Hide](#)

```
png("myplot.png")
ggplot(dsmall, aes(color, price/carat)) + geom_jitter(alpha = I(1 / 2), aes(color=color))
dev.off()
```

```
## quartz_off_screen
##                2
```

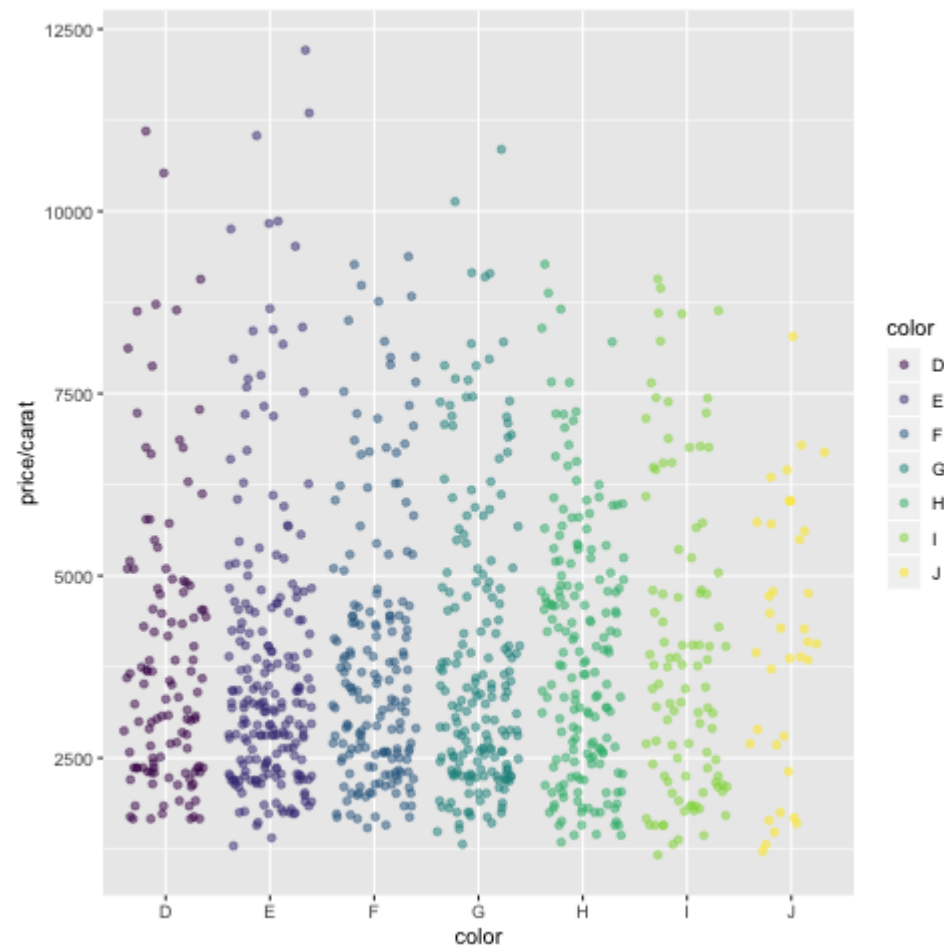

1.2.9 Inline R code

To evaluate R code inline, one can enclose an R expression with a single back-tick followed by `r` and then the actual expression. For instance, the back-ticked version of `'r 1 + 1'` evaluates to 2 and `'r pi'` evaluates to 3.1415927.

1.2.10 Mathematical equations

To render mathematical equations, one can use standard Latex syntax. When expressions are enclosed with single `$` signs then they will be shown inline, while enclosing them with double `$$` signs will show them in display mode. For instance, the following Latex syntax `d(X,Y) = \sqrt[]{\sum_{i=1}^n{(x_{i}-y_{i})^2}}` renders in display mode as follows:

$$d(X, Y) = \sqrt{\sum_{i=1}^n (x_i - y_i)^2}$$

1.2.11 Citations and bibliographies

Citations and bibliographies can be autogenerated in R Markdown in a similar way as in Latex/Bibtex. Reference collections should be stored in a separate file in Bibtex or other supported formats. To cite a publication in an R Markdown script, one uses the syntax `[@<id1>]` where `<id1>` needs to be replaced with a reference identifier present in the Bibtex database listed in the metadata section of the R Markdown script (e.g. `bibtex.bib`). For instance, to cite Lawrence et al. (2013), one uses its reference identifier (e.g. `Lawrence2013-kt`) as `<id1> [Lawrence2013-kt]`. This will place the citation inline in the text and add the corresponding reference to a reference list at the end of the output document. For the latter a special section called `References` needs to be specified at the end of the R Markdown script. To fine control the formatting of citations and reference lists, users want to consult this the corresponding R Markdown page (http://rmarkdown.rstudio.com/authoring_bibliographies_and_citations.html). Also, for general reference management and outputting references in Bibtex format Paperpile (<https://paperpile.com/features>) can be very helpful.


2 手把手演练


2.1 RMarkdown安装指导

- 0. 安装R软件: R-cran
- 1. 安装一个R的IDE (强烈推荐RStudio)
- 2. 安装**Latex**或者其他**Tex**编译器 (至少有一个Tex编译器)
- 3. 安装**knitr**和**rmarkdown**这两个安装包
- 4.
- 5. Back Door: <https://bookdown.org/yihui/rmarkdown/installation.html>
(<https://bookdown.org/yihui/rmarkdown/installation.html>)


2.2 开始一个新的Project

1. Make a folder called "XXXXXX" on the C: or the D: drive.
2. Within this folder, make folders for each assignment called, for example, "Assignment 1", "Assignment 2"....
3. Open RStudio. You may have to run RStudio as administrator to install the packages discussed below. To run RStudio as administrator, right-click the RStudio icon and click on 'Run as administrator'.

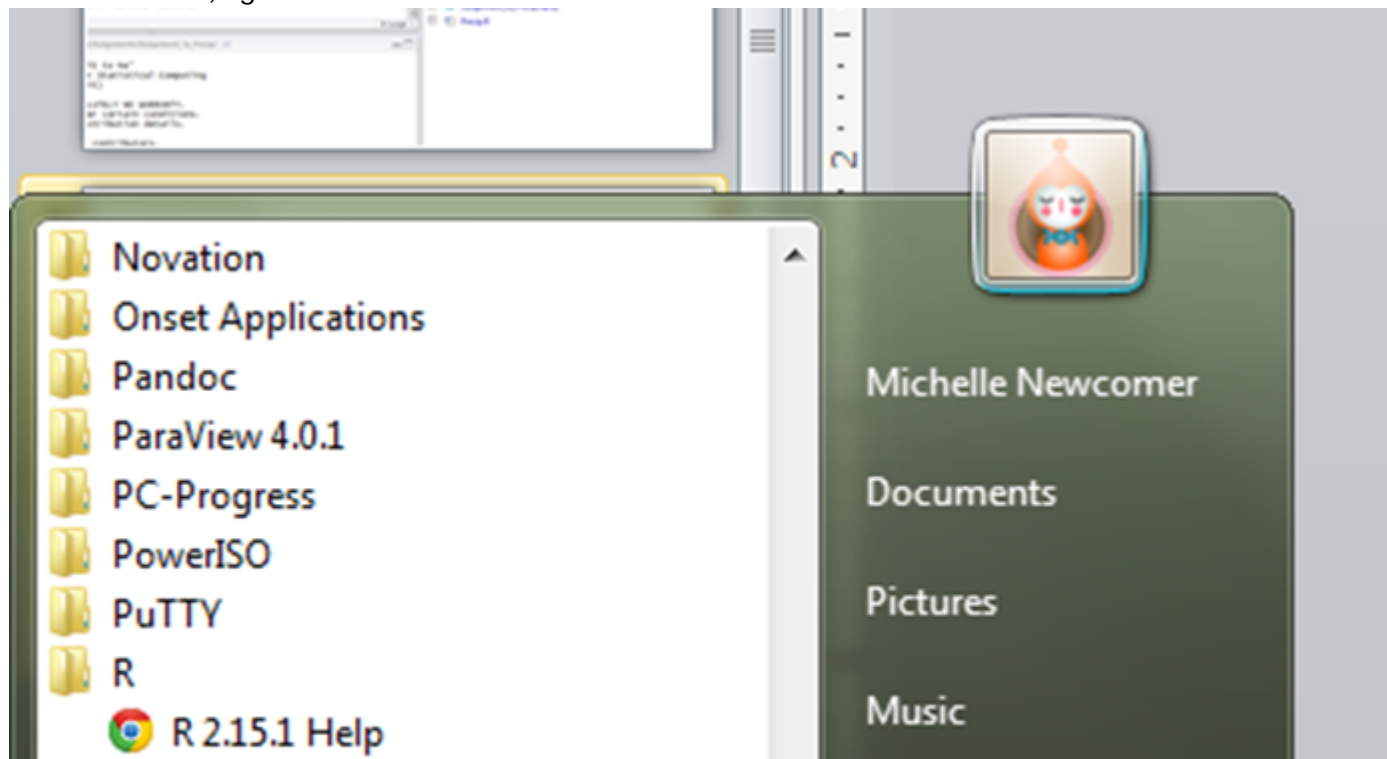

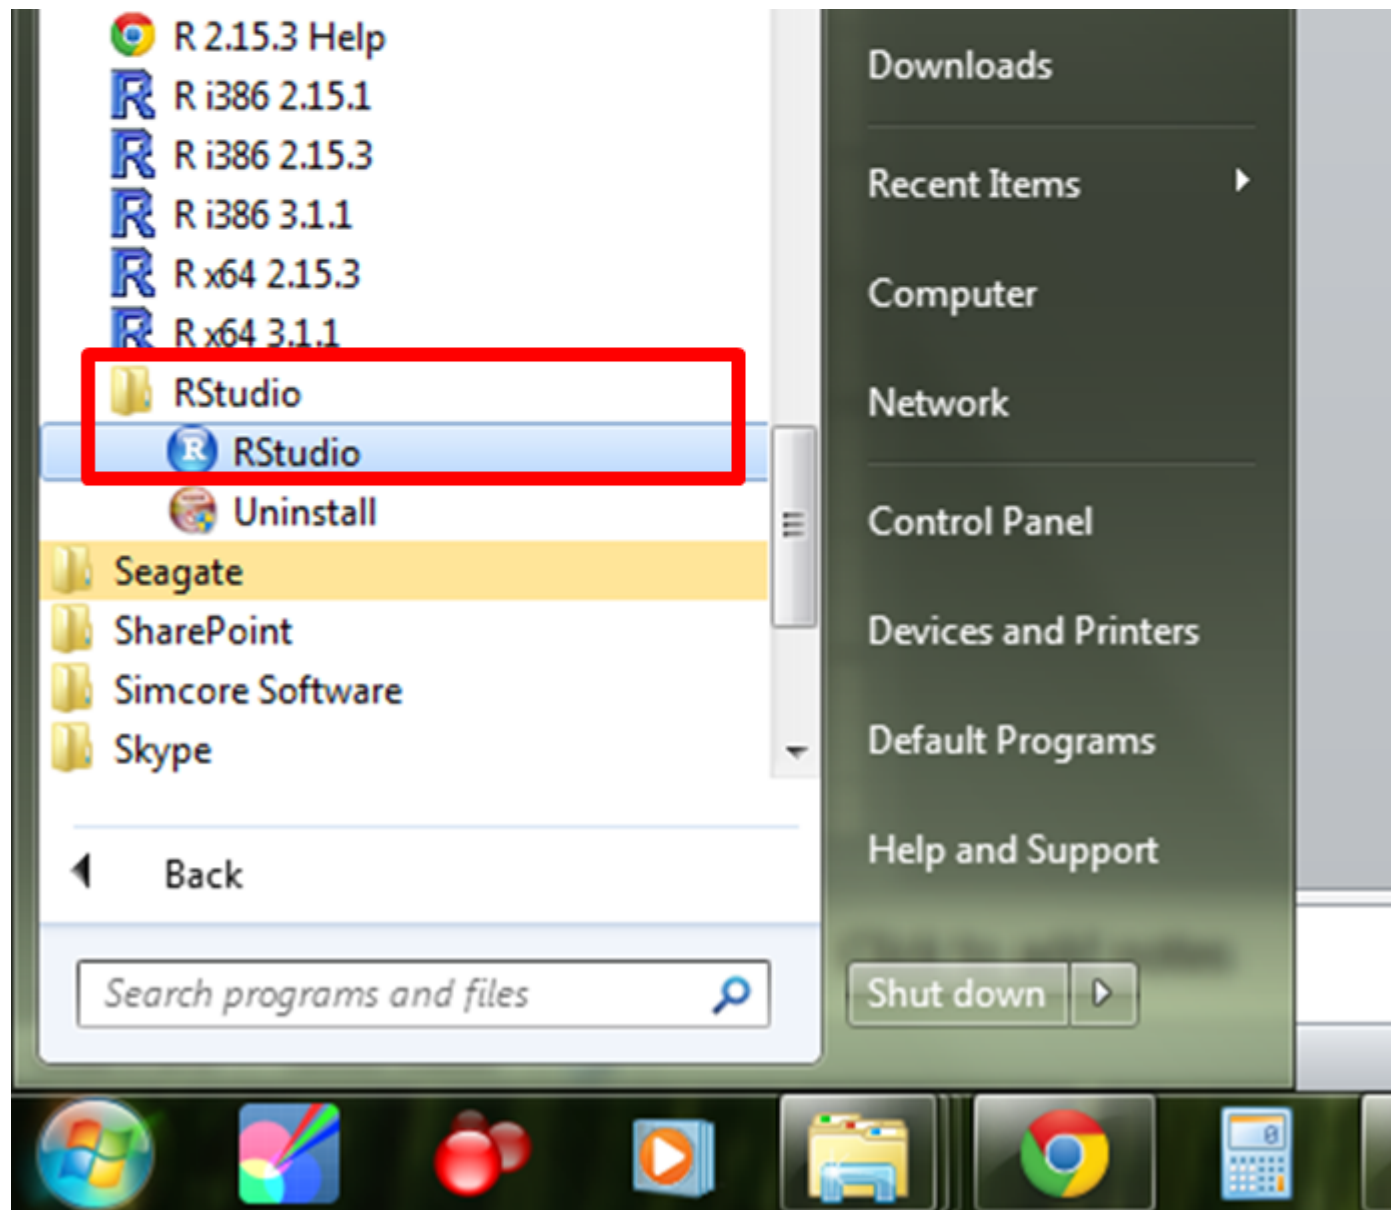


4. Open and upload the R Markdown environment in R Studio.

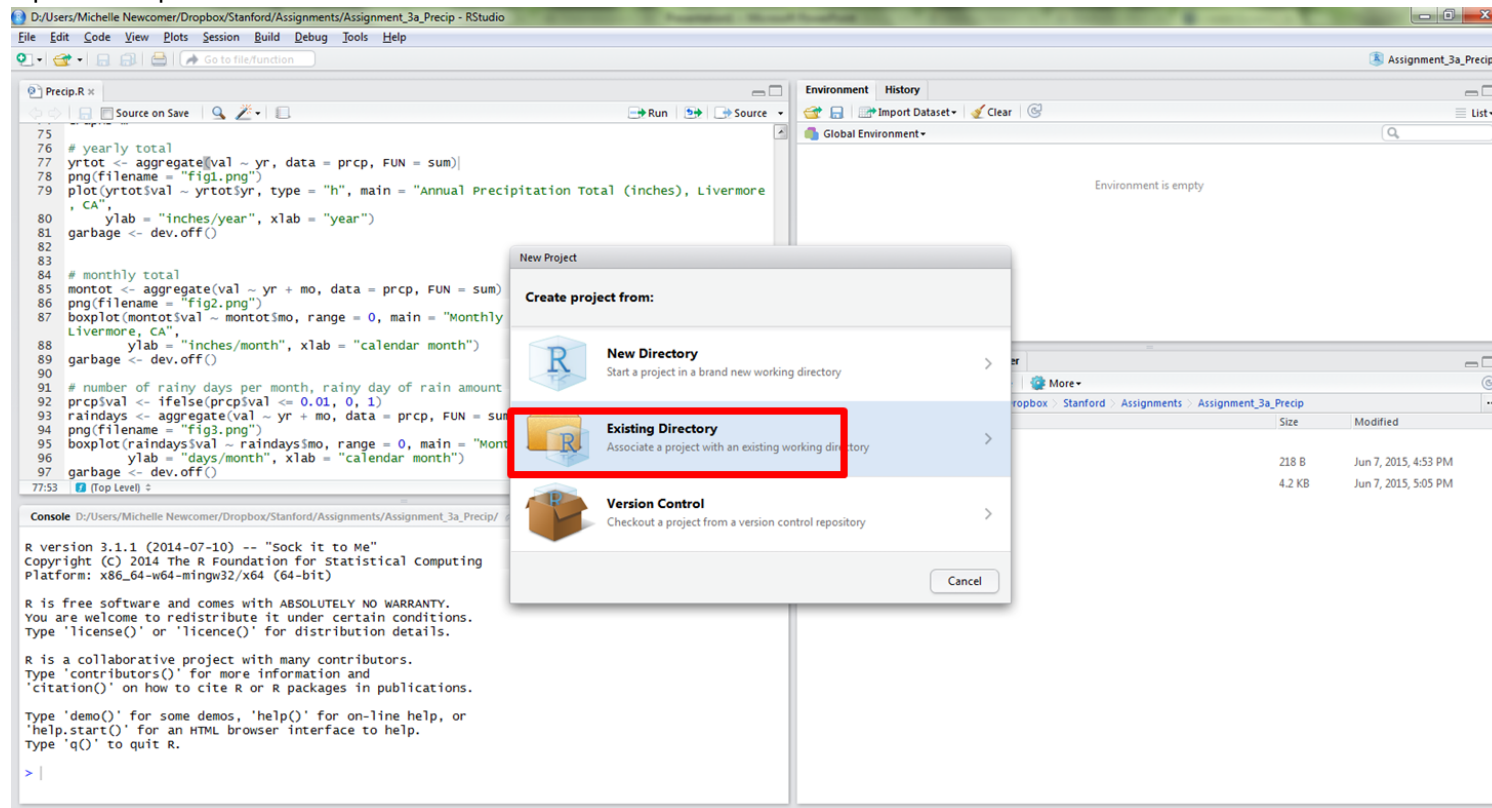

5. We are now going to open an R Markdown file that I have already created for you as a tutorial. We will see some basic operations in the menu bar...

6. Step 6 here is for future reference. You do not need to create a new document or script right now, but you may need to in the future.

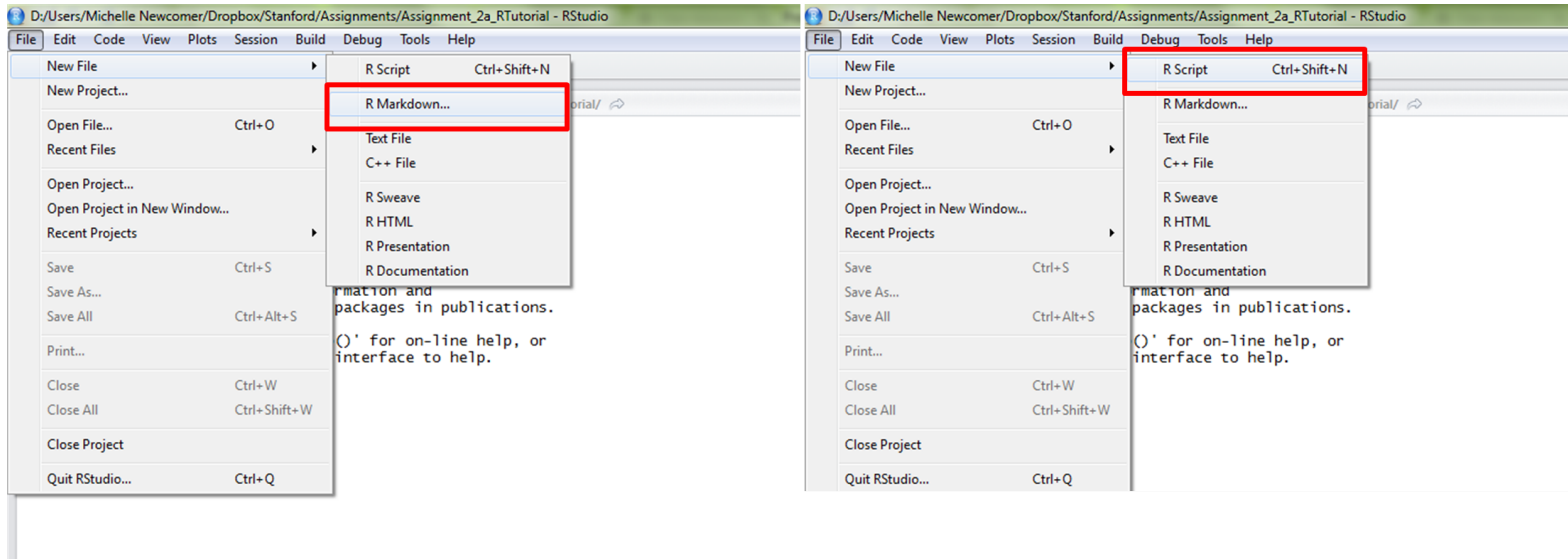

step6

To create a new R Markdown document: Click on 'File' -> 'New File' -> 'R Markdown' to create a new markdown document.

To create a new R script: Click on 'File' -> 'New File' -> 'R Script' to create a new R script.

3 可能遇到的问题

- **R Markdown**安装失败：一般是缺少安装包
- 中英文字符报错：记得用UTF-8
- R Markdown不会自动纠正拼写错误！
- 注意：尽管**knitr**可以直接生成PDF文件，但是因为当前笔记中有中文有英文，在转换成.tex文件时可能出现問題，因此，当前只需要用knitr to html就可以

4 First Assignment

- 请用**R Markdown**制作一份自己的简历（Curriculum Vitae），包括...
- Due Date: TBD