

網站規劃與設計

授課講師 徐慈璟

單欄排版

課程作業網站

平時作業

期中作業

期末作業

平時作業

3/18

作業一



3/25

作業二



各區內容分開
不交疊

多欄排版

低門檻! \$490 免運

晚安您好!

登入

會員獨享

- 24** 24小時快速到貨
- 力** 鑑賞期退貨保證
- 司** 多元付款方式
- 0%** 銀行分期零利率

註冊送P幣



一日限定 驚爆價

ECOVACS

限時 瘋搶 科沃斯掃拖機
特惠價\$7999

24力 24力會員日
狂降39折起

筆電春日遊

指定滿額限量直接送
快充+LIFT+控制器+1500P

前往

24力會員日
最高抽240P幣

Go!



天天簽到
限量P幣發送中!!

Go!



鈔省星期天
滿1000折120

Go!



筆電特賣

加碼

24力大使 陳保憲

24號會員日

24力

各區內容
可交疊
可設定特定位置

螢幕後的立體空間

1

2

3

物件的範圍邊界



物件的範圍邊界
(會以一個寬高的方塊包圍)

width



high


物件的範圍邊界

Margin


Border

Padding

Content

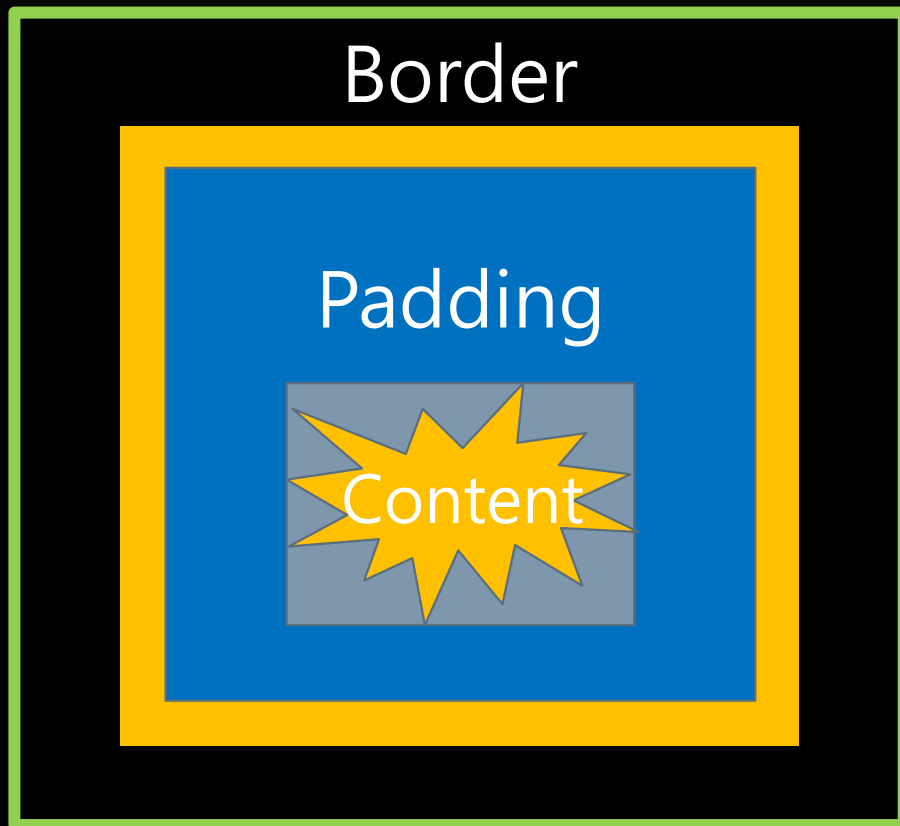

【物件的上右下左位置】

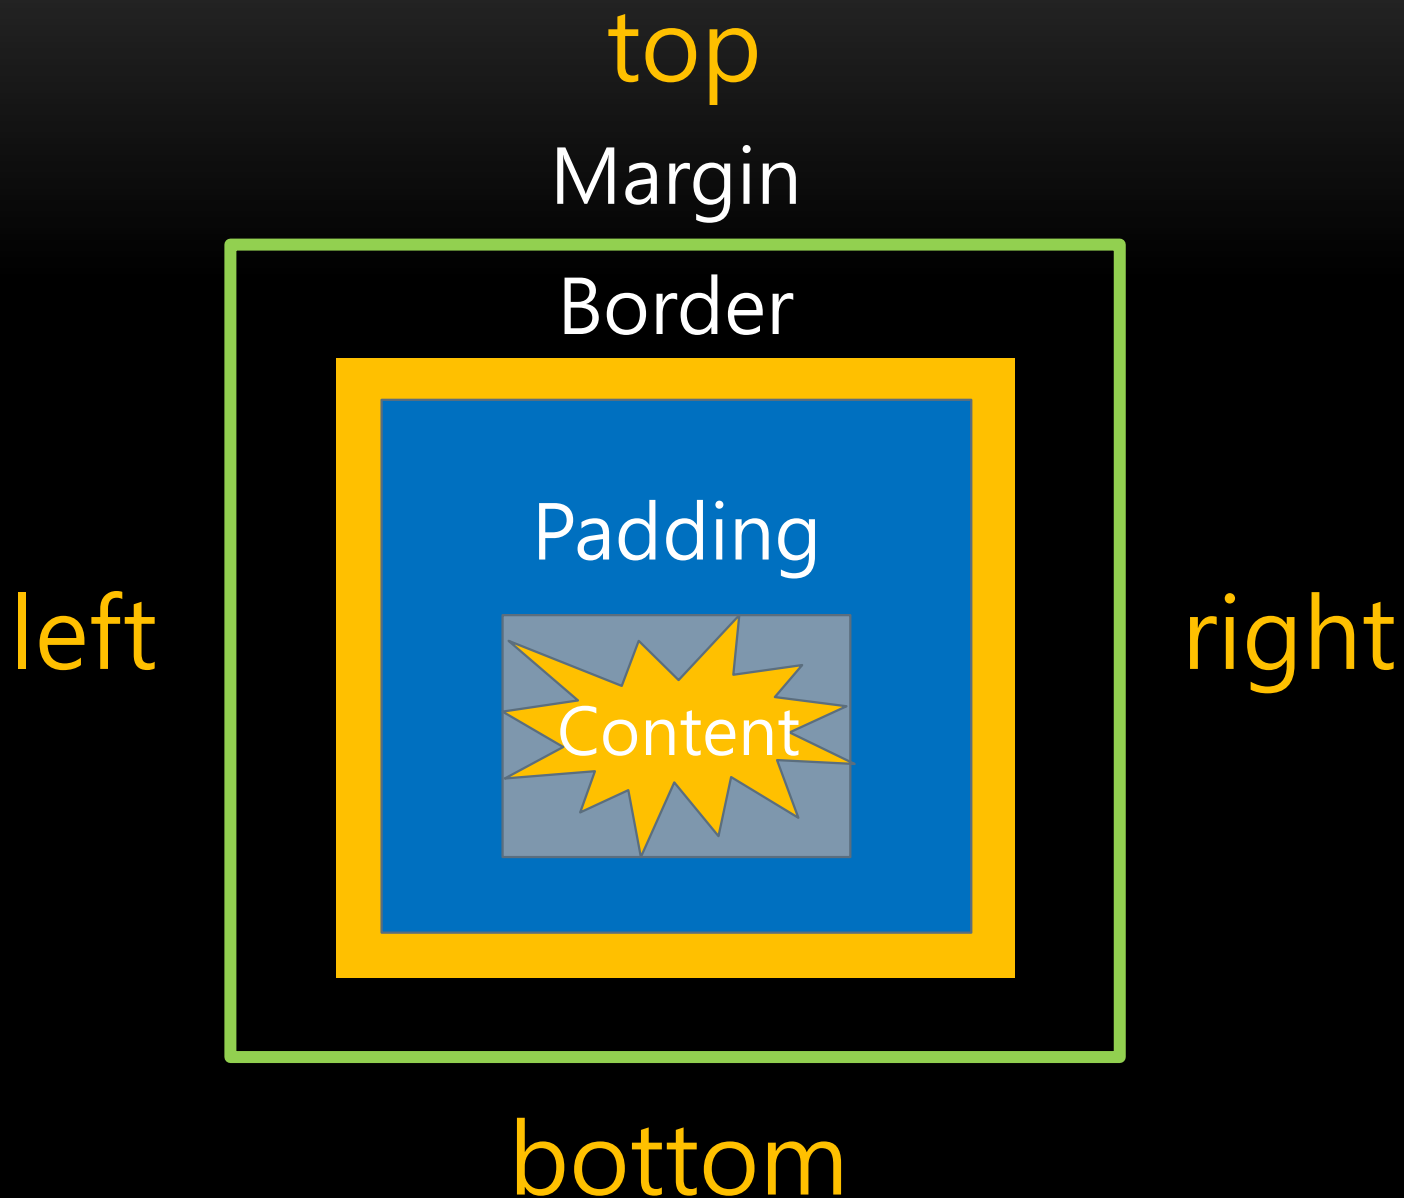

排版屬性：position

排版屬性：position

- position: **static**; (預設、不可設定上右下左)
- position: **relative**; (相對位置、可設定上右下左)
- position: **absolute**; (絕對位置、可設定上右下左)
- position: **fixed**; (固定位置、可設定上右下左)
- position: **sticky**; (滑鼠滑到設定位置即鎖定位置、可設定上下左右、有使用限制)

使用方式範例

```
div{  
    position: fixed;  
    bottom:0;  
    right:0;  
}
```

Position設定

```
position: static
```

```
position: absolute  
(right:0; top:0;)
```

```
position: relative (top:30px; left:100px;)
```

```
position: sticky (top:0;)
```

```
position: fixed (right:0; bottom:0;)
```

應用方式

排版屬性：float

排版屬性：float

- float: left;
- float: right;

※ 元素間是浮動的，若有空間就會並排

應用方式

1. 圖繞文的效果

圖置左



This is some text. This is some text. This is some
text. This is some text. This is some text. This is
some text. This is some text. This is some text.
This is some text. This is some text. This is some
text. This is some text. This is some text. This is
some text. This is some text. This is some text.

圖置右



This is some text. This is some text. This is some
text. This is some text. This is some text. This is
some text. This is some text. This is some text.
This is some text. This is some text. This is some
text. This is some text. This is some text. This is
some text. This is some text. This is some text.
This is some text. This is some text. This is some
text. This is some text. This is some text. This is
some text. This is some text.

A white calculator icon with a blue display screen and buttons, set against a red circular background.

2. 分割欄位 (選單+內容)

平時作業

期中作業

期末作業

Personal branding is by no means a new or light topic, but with the rise of social technologies, personal branding is as accessible as ever, meaning you have so much more opportunity, but also so much more competition. Personal branding is by no means a new or light topic, but with the rise of social technologies, personal branding is as accessible as ever, meaning you have so much more opportunity, but also so much more competition. Personal branding is by no means a new or light topic, but with the rise of social technologies, personal branding is as accessible as ever, meaning you have so much more opportunity, but also so much more competition. Personal branding is by no means a new or light topic, but with the rise of social technologies, personal branding is as accessible as ever, meaning you have so much more opportunity, but also so much more competition. Personal branding is by no means a new or light topic, but with the rise of social technologies, personal branding is as accessible as ever, meaning you have so much more opportunity, but also so much more competition.

文章1

文章2

網頁文字排版要點

設計任務二

品牌形象

個人品牌網站

設計任務二

品牌形象 / 個人品牌網站

- 形象Logo (header)
- 導覽列 (nav)
- 形象背景圖 (hero)
- 形象標題 (可包含動畫)
(animation)
- 人員/作品列表 (card)

<header>

About

Product

Contact

<nav>

interaction

interaction is the process of engaging with something or someone.

<hero>

<section>

— About Us —



NAME

more description



NAME

more description



NAME

more description



NAME

more description

<card>

<section>

— More details —





About basic layout

本範例以網頁版面配置與互動設計為主軸，先透過 position 與 float 練習元素定位、左右排列與基本版面結構，再進一步加入 hover、transition 與簡易 CSS 動畫效果。透過實際操作，理解 HTML 元素與 CSS 樣式之間的關係，並觀察網頁如何從靜態版面逐步發展成具有視覺回饋與互動效果的頁面。

<article>

<footer>

色彩設定



RGB

255, 255, 255

245, 234, 216

69, 9, 32

HEX

ffffff

#F3D9E4

#B15B6B

檔案下載



HTML基本架構

```
<!doctype html>
<html>

<head><!--設定頁面基本資訊+外部連結-->
<meta charset="utf-8">
<title>portfolio</title>
<link href="css/today.css" rel="stylesheet" type="text/css">
</head>


<body><!--瀏覽器看得見的內容-->
</body>

</html>
```

新增CSS資料夾與文件

新增文件

新增資料夾

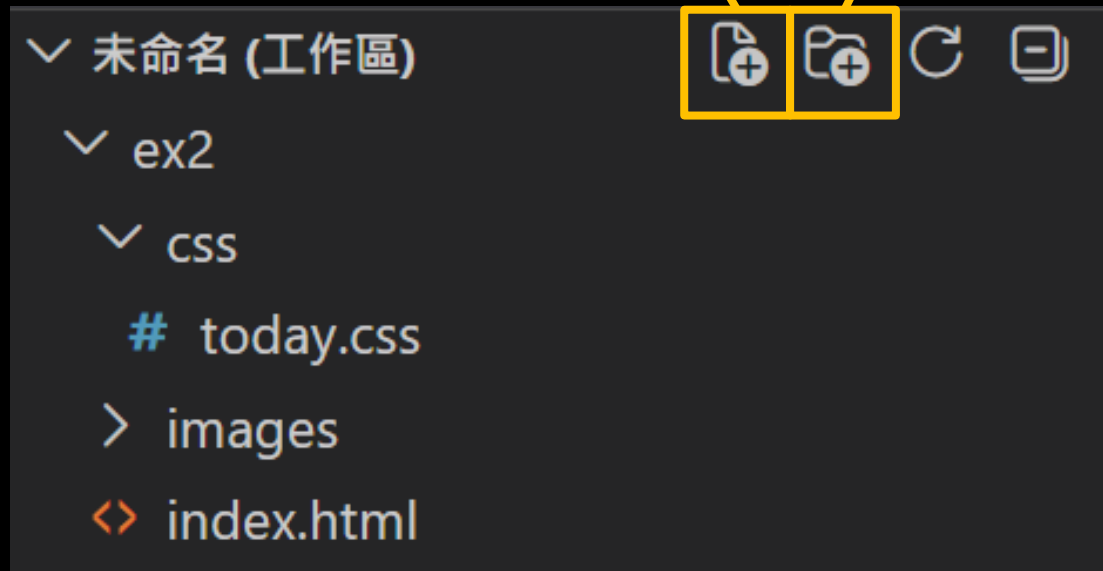

CSS


基本架構

```
body{  
    padding: 0;  
    margin: 0;  
    font-size: 1.2rem;  
}  
  
a{  
    text-decoration: none;  
    color:  rgba(69, 9, 32, 1);  
    display: inline-block;  
}  
  
a:hover{  
    color:  rgba(69, 9, 32, .5);  
}
```

<logo>

<header>

<nav>



About

Product

Contact

interaction

interaction is the process of engaging with something or someone.



HTML基本架構

```
<!--header-->
```

```
<header>
```

```
    <!--logo-->
```

```
    <div class="logo">
```

```
        <a href="#">
```

```
        
```

```
    </a>
```

```
    </div>
```

<logo>

```
    <!--nav-->
```

```
    <nav>
```

```
        <a href="#">About</a>
```

```
        <a href="#">Product</a>
```

```
        <a href="#">Contact</a>
```

```
    </nav>
```


<nav>

```
</header>
```

float : left

float : right

<logo>



<nav>



interaction

interaction is the process of engaging with something or someone.

CSS基本架構

```
/*logo*/  
.logo{  
    float: left;  
    width: 120px;  
    background:  rgba(255, 255, 255, 1);  
}  
  
.logo img{  
    width: 100%;  
    display: block;  
    margin: auto;  
}
```

顏色標示法

background: **rgba** (255,255,255, 0.8)



R



G



B




透
明
度

CSS新增

```
/*nav*/  
nav{  
    float: right;  
}  
  
nav a{  
    padding: 50px;  
    font-weight: bold;  
}  
  
nav a:hover{  
    text-decoration: underline;  
}
```

<menu>



About

Product

Contact

interaction

interaction is the process of engaging with something or someone.


HTML新增

```
<!--header-->
<header>
  <div class="menu">
    <!--logo-->
    <div class="logo">
      
    </div>
    <!--nav-->
    <nav>
      <a href="#">About</a>
      <a href="#">Product</a>
      <a href="#">Contact</a>
    </nav>
  </div>
</header>
```

CSS新增

```
.menu{  
    width: 80%;  
    margin: auto;  
}
```

<hero>



About

Product

Contact

interaction

interaction is the process of engaging with something or someone.

<h1>

HTML新增

```
<!--hero-->
<div class="hero">
  
  <h1>interaction</h1>
  <p>interaction is the process</p>
</div>
```

positionu定位結構

<hero>

position:relative

position:absolute

<h1>

position:absolute

CSS新增

```
/*hero*/  
.hero{  
    position: relative;  
    width: 100%;  
    height: 650px;  
    overflow: hidden;  
}  
  
.hero img{  
    width: 100%;  
    object-fit: cover;  
}
```

圖片對齊的方式




object-fit: cover;

CSS 新增

```
.hero h1{  
    position: absolute;  
    top: 10%;  
    left: 10%;  
    font-size: 150px;  
    color:  rgba(69, 9, 32, 1);  
}
```

```
.hero p{  
    position: absolute;  
    top: 50%;  
    left: 10%;  
    color:  rgba(69, 9, 32, 1);  
}
```



[About](#)


[Product](#)

[Contact](#)

interaction

interaction is the process of engaging with something or someone

position : fixed




About

Product

Contact

interaction


interaction is the process of engaging with something or someone.

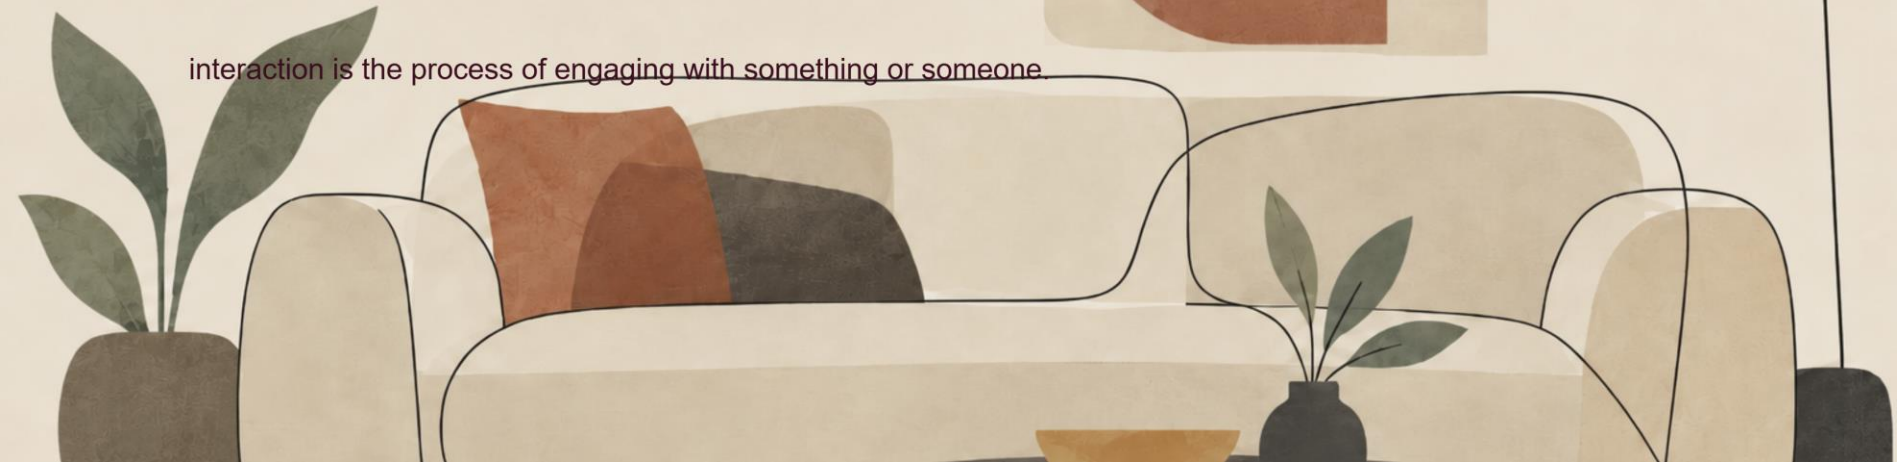

層疊的順序

z-index: 100000;

↓ 數值越大在越近螢幕

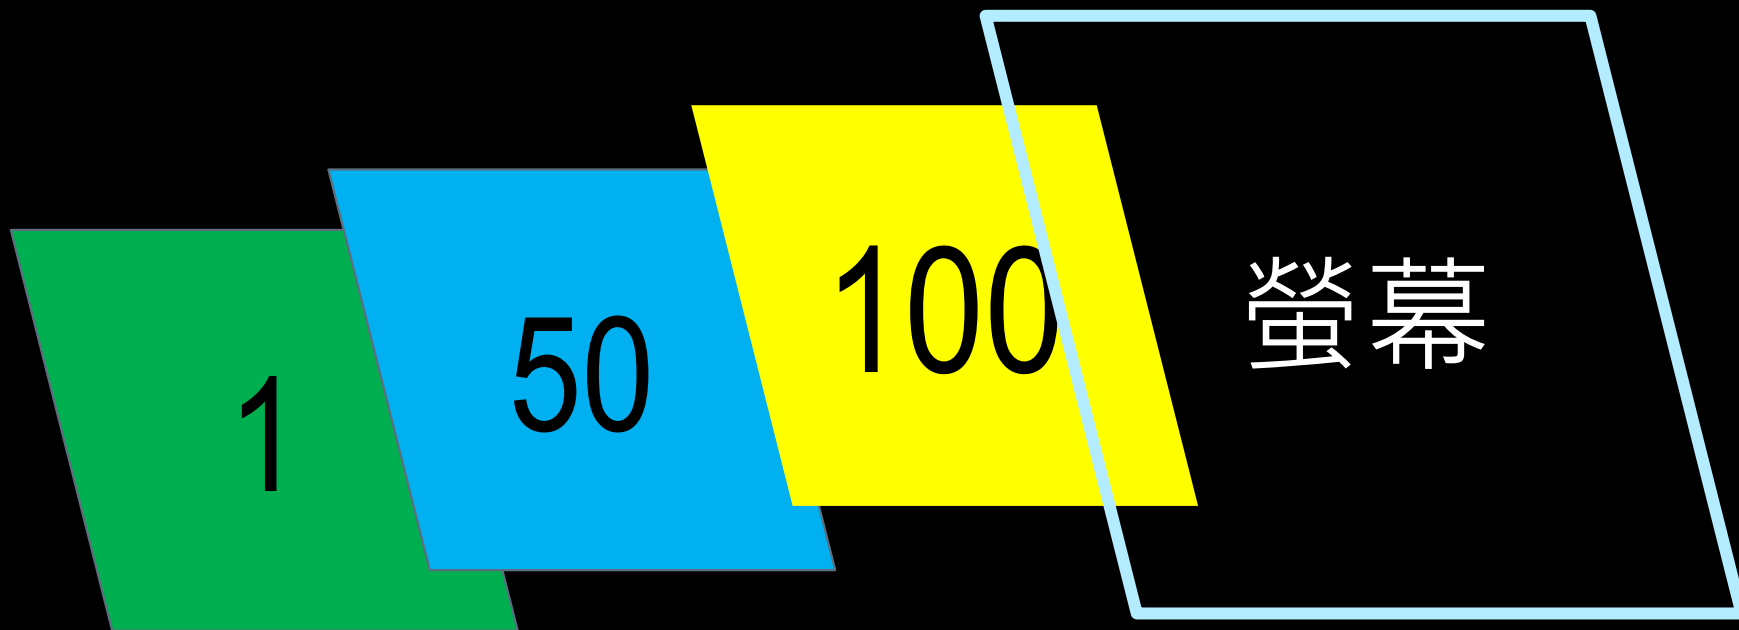

CSS 新增

```
/*header*/  
header{  
    position: fixed;  
    top: 0;  
    width: 100%;  
    height: auto;  
    z-index: 200000;  
}
```

<section>



— About Us —

<h1>



NAME

more description



NAME

more description



NAME

more description



NAME

more description

<card>



HTML新增

```
<!--card section-->
<section>
  <h1>- About Us -</h1>
  <!--card-->
  <div class="card">
    <a href="#">
      
      <h2>NAME</h2>
      <p>more description</p>
    </a>
  </div>
</section>
```

CSS新增

解除float

```
/*section*/
section{
    clear: both;
    width: 80%;
    margin: auto;
    margin-top: 50px;
}

section h1{
    color: rgba(69, 9, 32, 1);
    text-align: center;
}
```

CSS


新增

```
/*card*/
.card{
    display:inline-block;
    width:24.5%;
    box-sizing:border-box;
    padding:10px;
    text-align:center;
    cursor:pointer;
}

.card img{
    width:80%;
    border-radius:50%;
    border:solid 1px rgba(69, 9, 32, .2);
}
```


元素尺寸

- $\text{width} = \text{content width} + \text{Padding} + \text{Border}$

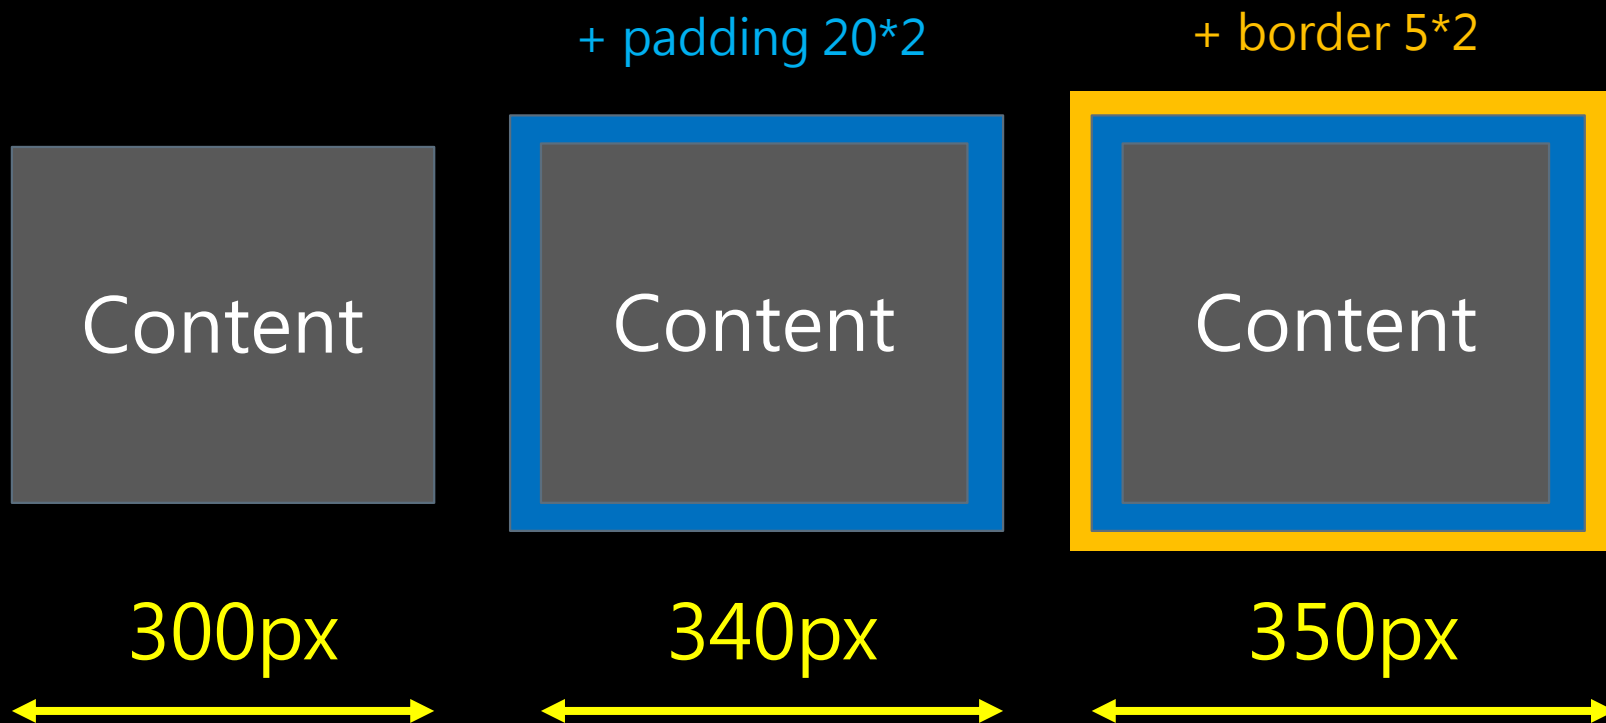


Box-sizing: border-box;

- width = 含 content width、Padding、Border

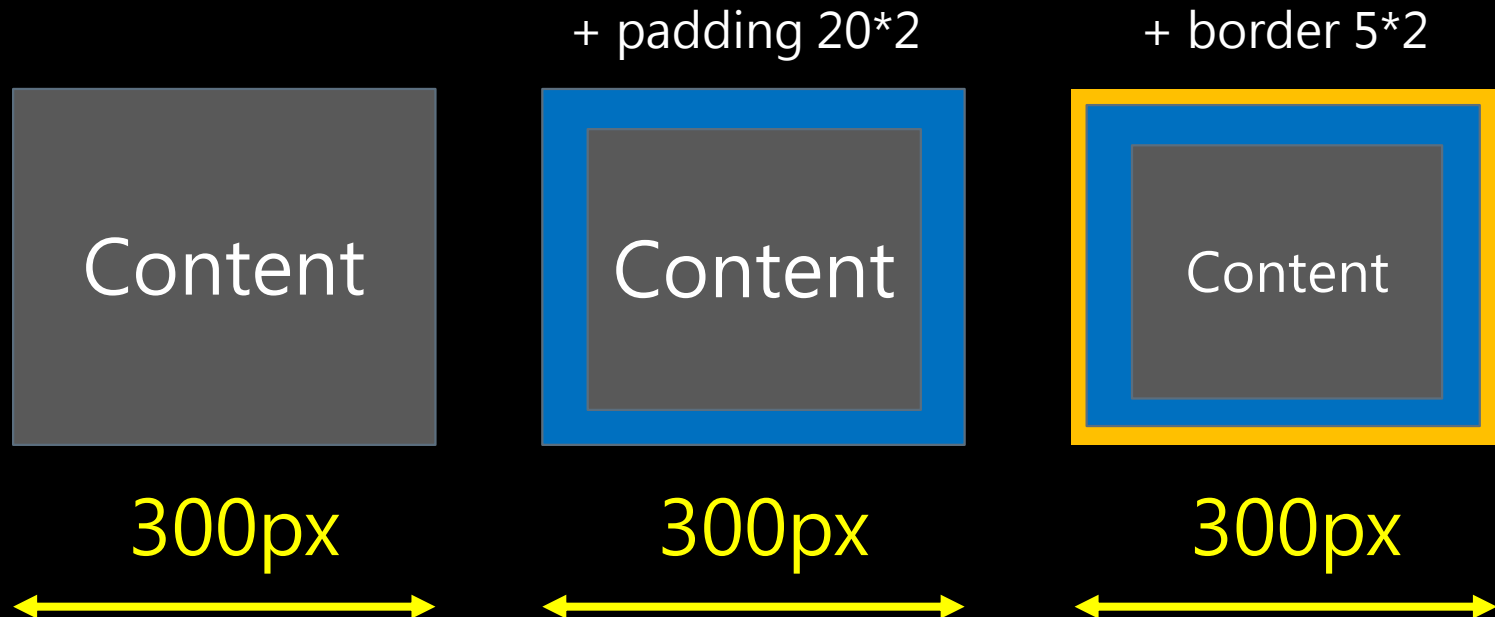

滑鼠滑過效果

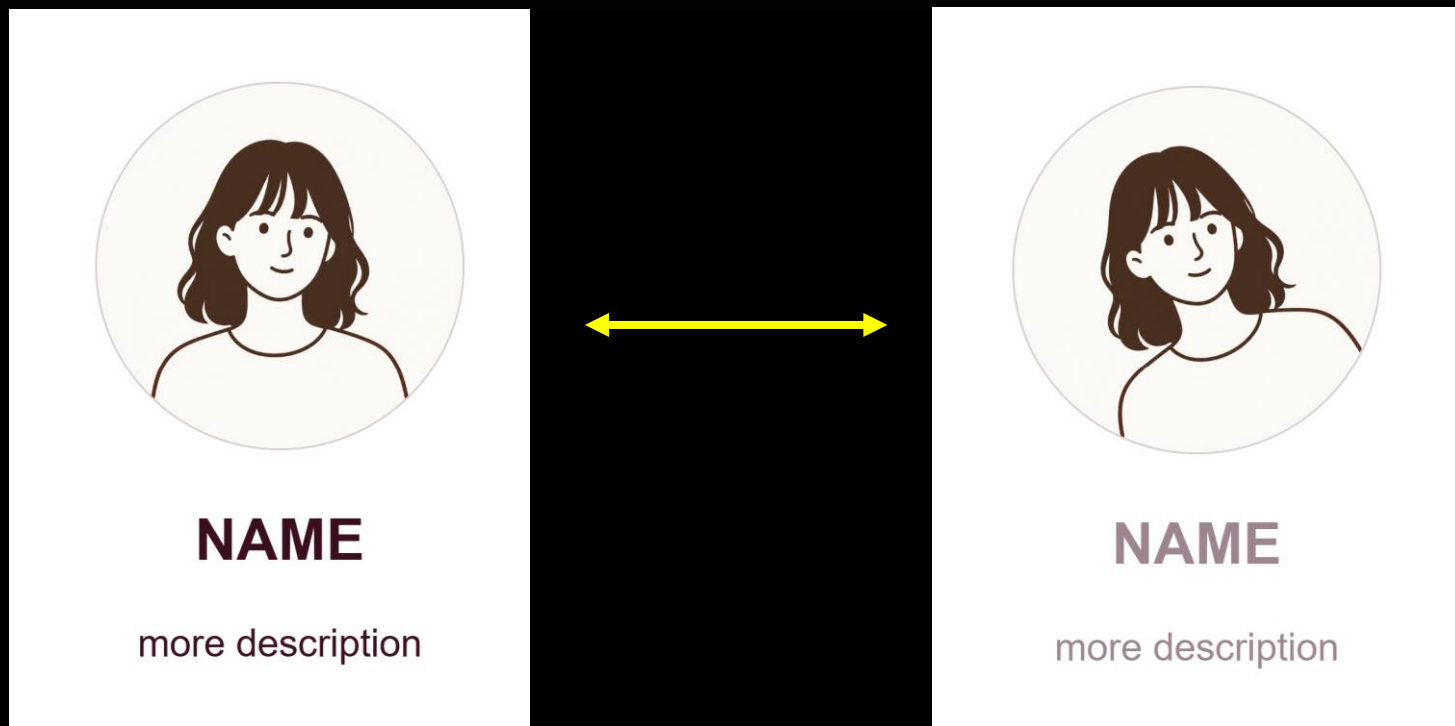


CSS新增

```
.card img{  
    width:80%;  
    border-radius:50%;  
    border:solid 1px □rgba(69, 9, 32, .2);  
  
    -ms-transform: rotate(0deg); /* IE 9 */  
    -webkit-transform: rotate(0deg); /* Safari */  
    transform: rotate(0deg); /* Standard syntax */  
  
    transition: transform 1.5s;  
    -webkit-transition: transform 1.5s;  
}
```

CSS新增

```
.card:hover img{  
    -ms-transform: rotate(-20deg); /* IE 9 */  
    -webkit-transform: rotate(-20deg); /* Safari */  
    transform: rotate(-20deg); /* Standard syntax */  
}
```

transform

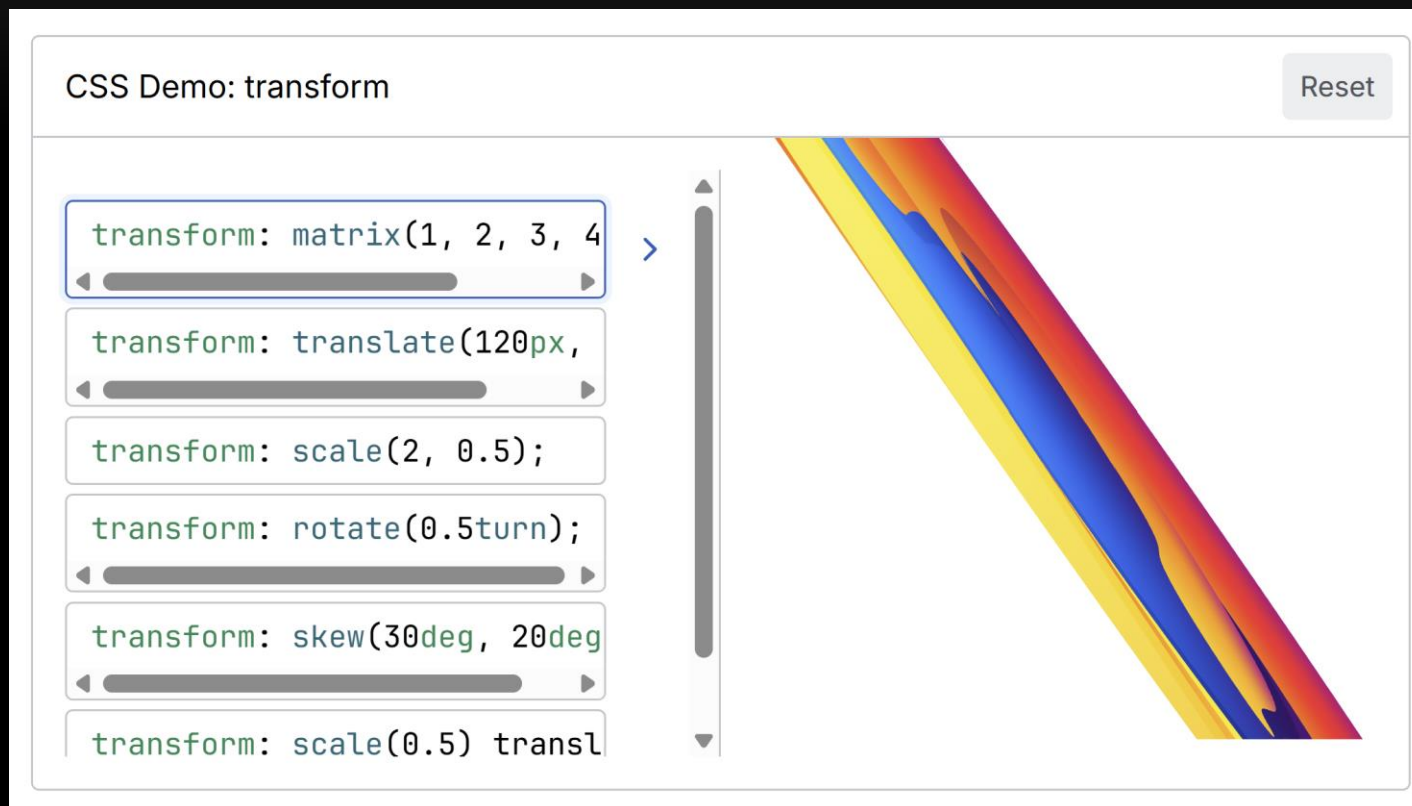

截圖：<https://developer.mozilla.org/zh-TW/docs/Web/CSS/Reference/Properties/transform>

transition

- css中可變動屬性狀態的設定
- 相關設定
 - transition
 - transition-delay
 - transition-duration
 - transition-property
 - transition-timing-function
- 參考：
https://www.w3schools.com/css/css3_transitions.asp

transition基本語法

transition: **opacity 1s , color 2s;**



要調整的屬性



調整所需時間



可用逗號串接

transition基本語法

transition-timing-function: **ease-in-out;**



改變的方式

參考：

[https://www.w3schools.com/cssref/tryit.php?file
name=trycss3_transition-timing-function2](https://www.w3schools.com/cssref/tryit.php?file=name=trycss3_transition-timing-function2)

!! 務必留意 !!

transition語法的放置位置

【需放置】

設定物件本身的語法

非hover狀態下的語法

<section>

— More details —

<h1>

About basic layout

本範例以網頁版面配置與互動設計為主軸，先透過 position 與 float 練習元素定位、左右排列與基本版面結構，再進一步加入 hover、transition 與簡易 CSS 動畫效果。透過實際操作，理解 HTML 元素與 CSS 樣式之間的關係，並觀察網頁如何從靜態版面逐步發展成具有視覺回饋與互動效果的頁面。

<article>

HTML新增

```
<!--section-->  
<section>  
  <h1>More details</h1>  
  <article>  
  </article>  
</section>
```

— More details —



`<a_left>`

About basic layout

本範例以網頁版面配置與互動設計為主軸，先透過 position 與 float 練習元素定位、左右排列與基本版面結構，再進一步加入 hover、transition 與簡易 CSS 動畫效果。透過實際操作，理解 HTML 元素與 CSS 樣式之間的關係，並觀察網頁如何從靜態版面逐步發展成具有視覺回饋與互動效果的頁面。

`<a_right>`

HTML新增

```
<article>
```

```
  <div class="a_left">
```

```
    
```

```
    <div class="moreb">More</div>
```

```
  </div>
```

```
  <div class="a_right">
```

```
    <h2>About basic layout</h2>
```

```
    <p>本次範例將介紹position，float的基本使用，並推至進階  
    互動應用。第二部分為介紹css的互動模式設定，推至簡易動  
    畫的使用。</p>
```

```
  </div>
```

```
</article>
```

CSS新增

```
/*article*/  
article{  
    width:100%;  
    height: 500px;  
    margin:auto;  
    margin-bottom: 30px;  
    overflow: hidden;  
}
```

CSS新增


```
.a_left{  
    float:left;  
    width:50%;  
    height:100%;  
}
```

```
.a_left img{  
    float:left;  
    width:100%;  
    height:100%;  
    object-fit:cover;  
}
```

CSS新增


```
.a_right{  
    float:left;  
    width:50%;  
    height:100%;  
    padding:50px;  
    box-sizing:border-box;  
  
    color:  rgba(69, 9, 32, 1);  
    background:  rgba(229, 152, 155, .3);  
    text-align:left;  
}
```

物件擁有上右下左位置

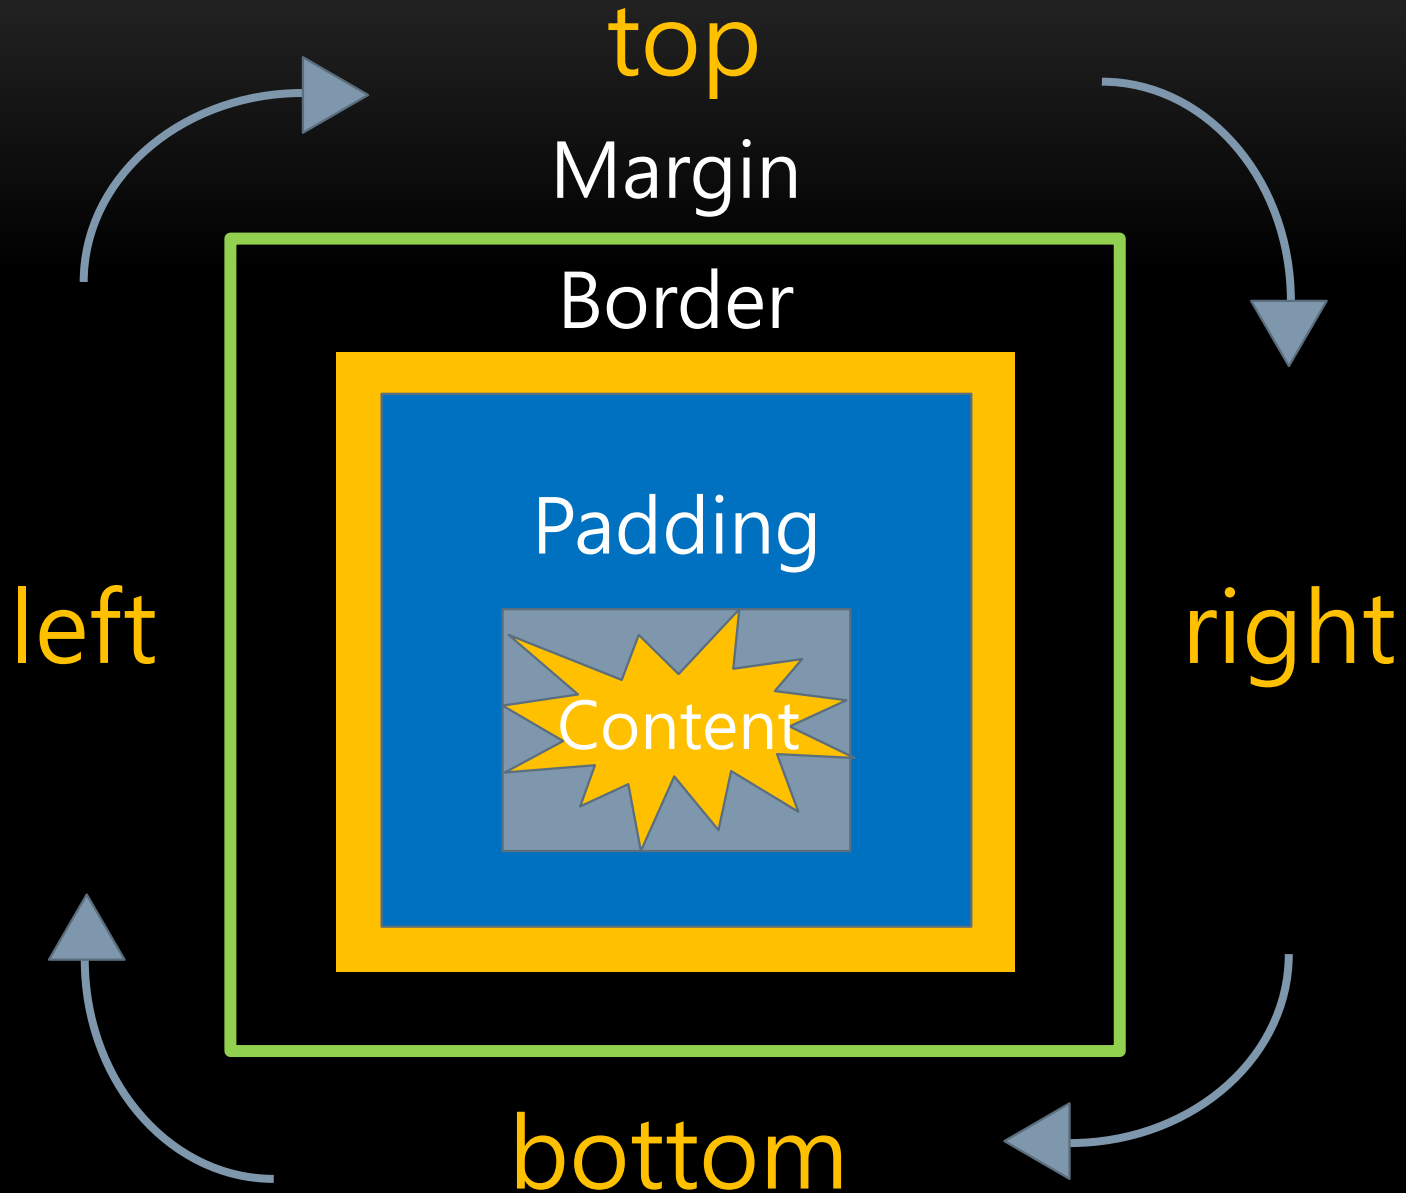

Padding, Margin, Border使用方式範例

```
div{  
  padding-top:20px;  
  padding-right:20px;  
  padding-bottom:20px;  
  padding-left:20px;  
}
```

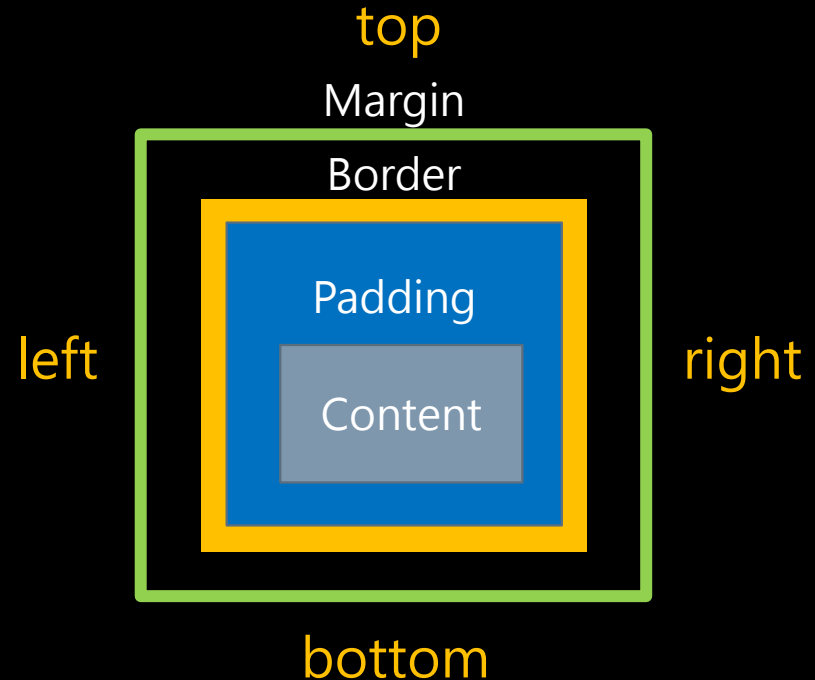

Padding, Margin, Border使用方式範例

```
div{
```

```
padding: 20px; (上右下左都是20)
```

```
padding: 20px 10px; (上下20, 左右10)
```

```
padding: 20px 5px 10px; (上20, 左右5, 下10)
```

```
padding: 20px 5px 10px 15px; (上20, 右5, 下10, 左15)
```

```
}
```

※ 順序: 上 — 右 — 下 — 左 (順時鐘方向)

滑鼠滑過效果

— More details —



About basic layout

本範例以網頁版面配置與互動設計為主軸，先透過 position 與 float 練習元素定位、左右排列與基本版面結構，再進一步加入 hover、transition 與簡易 CSS 動畫效果。透過實際操作，理解 HTML 元素與 CSS 樣式之間的關係，並觀察網頁如何從靜態版面逐步發展成具有視覺回饋與互動效果的頁面。

— More details —




About basic layout

本範例以網頁版面配置與互動設計為主軸，先透過 position 與 float 練習元素定位、左右排列與基本版面結構，再進一步加入 hover、transition 與簡易 CSS 動畫效果。透過實際操作，理解 HTML 元素與 CSS 樣式之間的關係，並觀察網頁如何從靜態版面逐步發展成具有視覺回饋與互動效果的頁面。

CSS新增


```
.moreb{  
    position:absolute;  
    top:50%;  
    left:50%;  
    transform: translate(-50%, -50%);  
  
    background:  rgba(69, 9, 32, 1);  
    padding:30px;  
    color:  rgba(255, 255, 255, 1);  
}
```

物件對齊起點重置

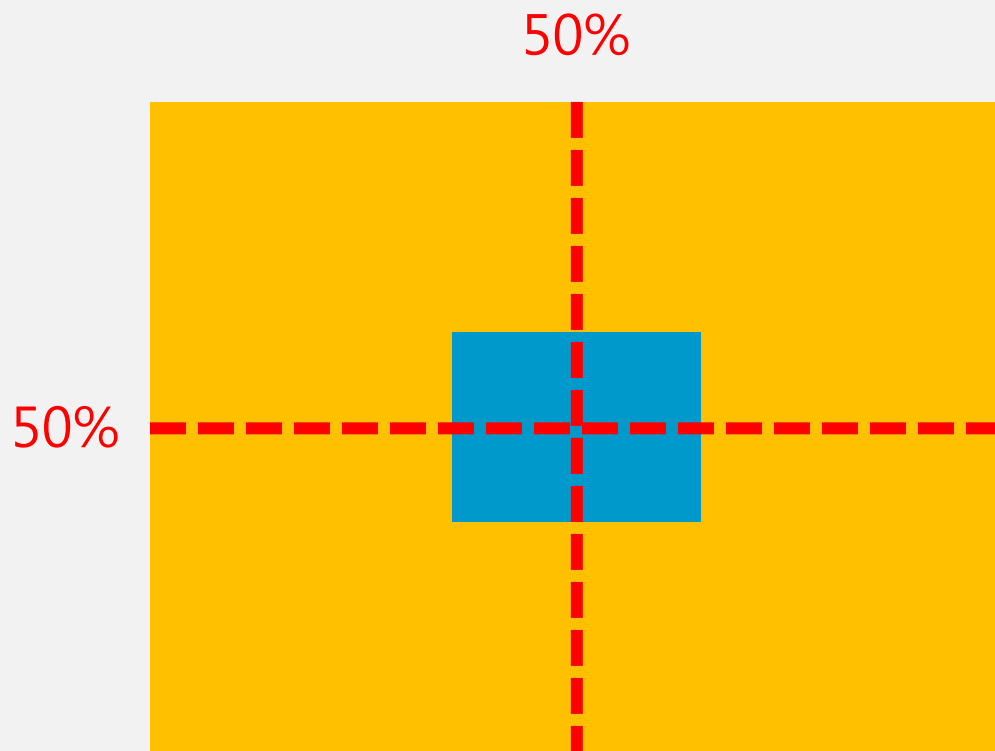


```
position:absolute;  
top:50%;  
left:50%;
```

物件對齊起點重置

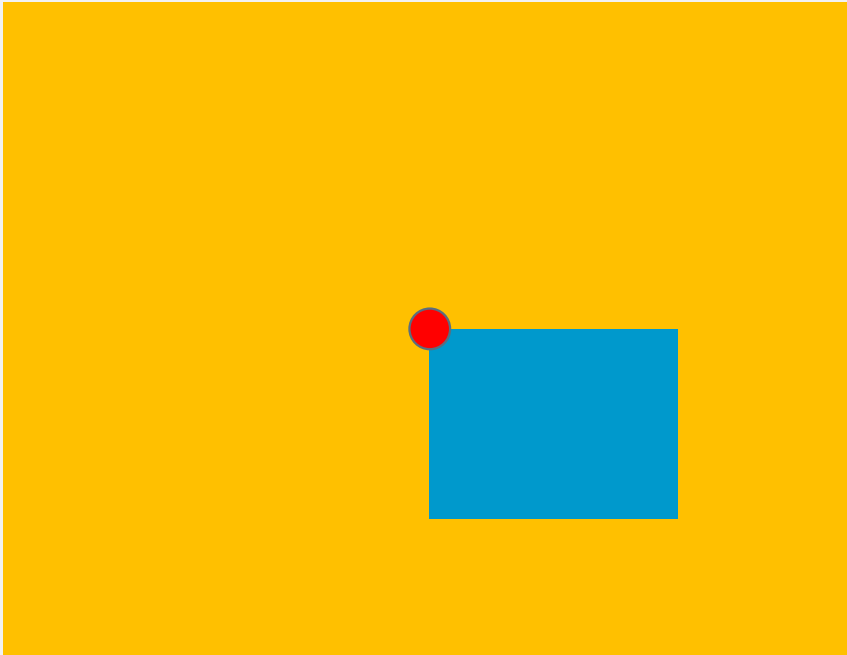

```
position:absolute;  
top:50%;  
left:50%;
```

物件對齊起點重置

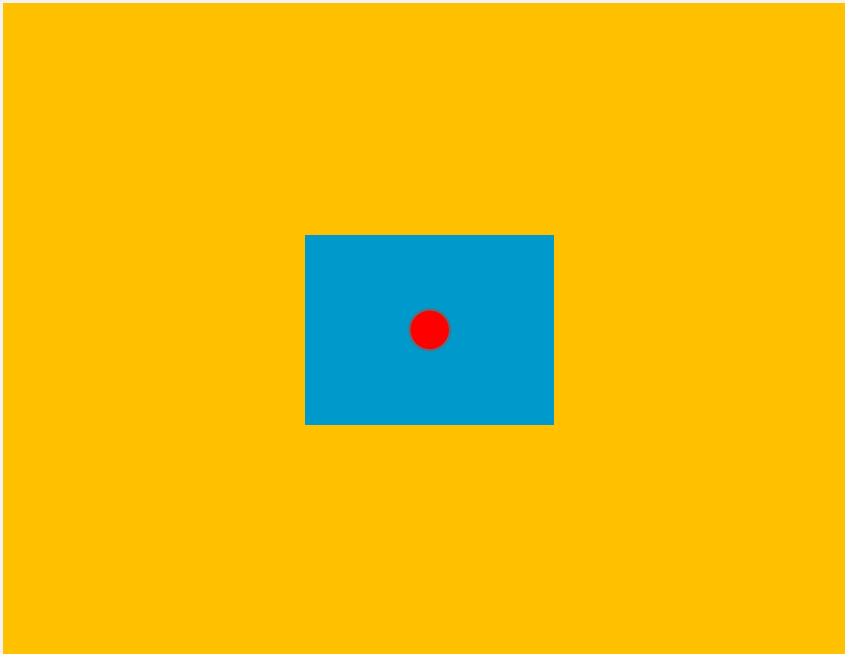

position: absolute;

top: 50%;

left: 50%;

transform: translate(-50%, -50%);

CSS新增

```
.moreb{  
    position:absolute;  
    top:50%;  
    left:50%;  
    transform: translate(-50%, -50%);
```

```
    background:  rgba(69, 9, 32, 1);  
    padding:30px;  
    color:  rgba(255, 255, 255, 1);
```

```
    opacity:0;  
    transition: opacity 1s;  
    -webkit-transition: opacity 1s;  
  
    transition-timing-function: ease-in-out;  
    -webkit-transition-timing-function: ease-in-out; /* Safari */
```

```
}
```

CSS新增


```
/*article*/  
article{  
    width:100%;  
    height: 500px;  
    margin:auto;  
    margin-bottom: 30px;  
    overflow: hidden;  
}
```

```
article:hover{  
    cursor:pointer;  
}
```

CSS新增

```
article:hover .moreb{  
    opacity:1;  
}
```

使用absolute，容器需調整



About


Product

Contact

interaction

More

interaction is the process of engaging with something

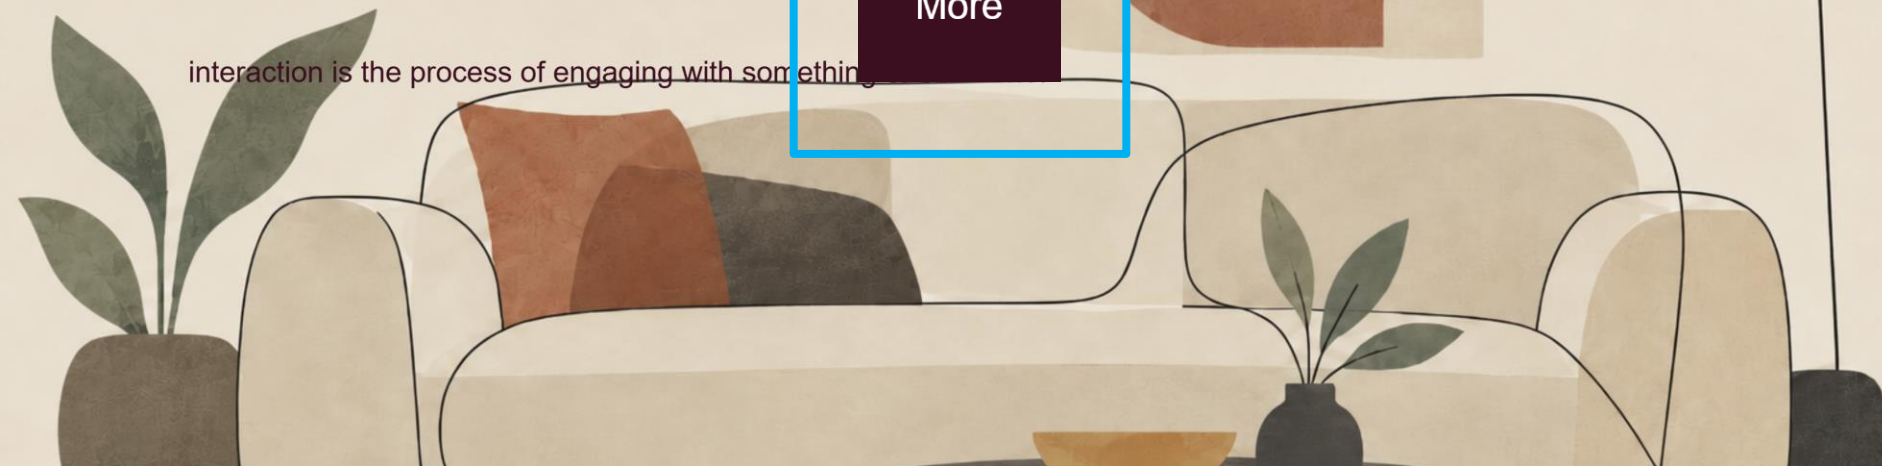

CSS新增

容器調整

```
.a_left{  
    position: relative;  
    float:left;  
    width:50%;  
    height:100%;  
}
```


HTML新增

```
<!--footer-->  
<footer>  
&copy;All Right Reserved.  
</footer>
```

CSS新增

```
/*footer*/  
footer{  
    clear: both;  
    width: 100%;  
    padding: 50px 0px;  
    text-align: center;  
}
```

如何引用Google fonts

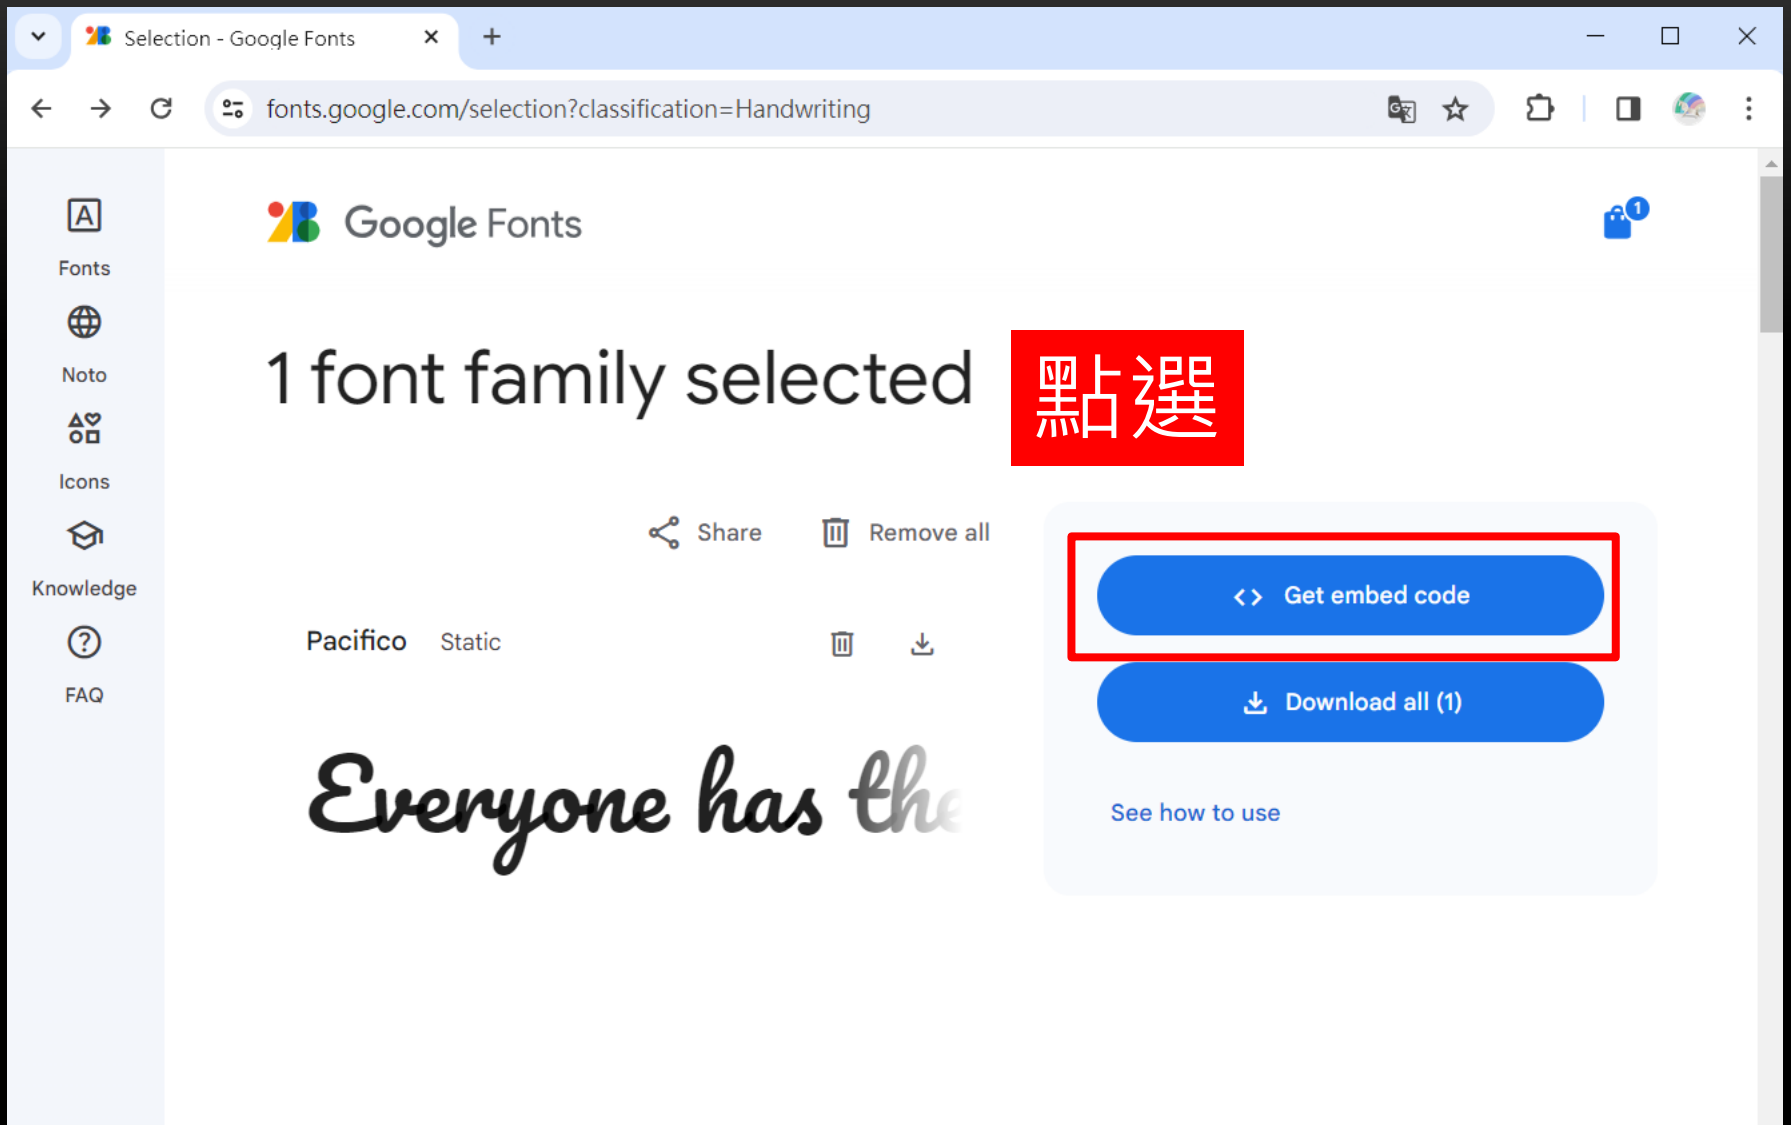

截圖：https://fonts.google.com/selection?classification=Handwriting



截圖：<https://fonts.google.com/selection?classification=Handwriting>

兩種嵌入方式

Selection Embed Code - Google Fonts

fonts.google.com/selection/embed

將此段貼入HTML檔案

Google Fonts

Fonts

Noto

Icons

Knowledge

FAQ

Whereas recogniti

Regular 400

1 style

Regular 400

Android iOS Flutter

☒ <link> ☐ @import

Embed code in the <head> of your html

```
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Pacifico&display=swap" rel="stylesheet">
```

Copy code

Pacifico: CSS class

```
.pacifico-regular {
  font-family: "Pacifico", cursive;
  font-weight: 400;
  font-style: normal;
}
```

Copy code

截圖：<https://fonts.google.com/selection?classification=Handwriting>

HTML

```
<!doctype html>
<html>
<head>
<meta charset="utf-8">
<title>today</title>
<link href="css/today.css" rel="stylesheet" type="text/css">
<link href="https://fonts.googleapis.com/css2?
family=Pacifico&display=swap" rel="stylesheet">
</head>
```

Selection Embed Code - Google Fonts

fonts.google.com/selection/embed

Google Fonts

Pacifico Static

Whereas recogniti

1 style

Regular 400

Web Android iOS Flutter

☒ <link> ☐ @import

Embed code in the <head> of your html

```
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="stylesheet" href="https://fonts.googleapis.com/css2?family=Pacifico" as="font" type="text/css">
```

Copy code

Pacifico: CSS class

```
.pacifico-regular {
  font-family: "Pacifico", cursive;
  font-weight: 400;
  font-style: normal;
}
```

Copy code

將此段貼入CSS檔案

截圖：<https://fonts.google.com/selection?classification=Handwriting>

CSS新增

```
@import url('https://fonts.googleapis.com/css2?family=Roboto:wght@100;400;900&display=swap');  
@import url('https://fonts.googleapis.com/css2?family=Noto+Serif:ital,wght@0,100..900;1,100..900&display=swap');
```

CSS新增

```
body{  
  padding: 0;  
  margin: 0;  
  font-family: "Roboto", sans-serif;  
  font-size: 1.2rem;  
}
```

CSS新增

```
.hero h1{  
    position: absolute;  
    top: 10%;  
    left: 10%;  
    font-size: 150px;  
    font-family: "Noto Serif", serif;  
    color: ■ rgba(255, 255, 255, 1);  
}
```

Google Fonts

不同字重

鑑於對人類家

ExtraLight 200	☒
Light 300	☐
Regular 400	☒
Medium 500	☐
SemiBold 600	☐

Embed code in the <head> of your html

```
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Noto+Serif+TC:wght@200;400&display=swap" rel="stylesheet">
```

Copy code

Noto Serif TC: CSS classes

```
.noto-serif tc-extralight {
  font-family: "Noto Serif TC", serif;
  font-weight: 200;
  font-style: normal;
}

.noto-serif tc-regular {
  font-family: "Noto Serif TC", serif;
```

截圖：<https://fonts.google.com/selection?classification=Handwriting>

The screenshot shows the Google Fonts interface for the Noto Serif Traditional Chinese font family. The left sidebar contains navigation links: Fonts, Noto, Icons, Knowledge, and FAQ. The main content area displays the font name and a preview of the characters '鑑於對人類家'. Below this, a list of font weights is shown with toggle switches: ExtraLight 200 (selected), Light 300, Regular 400 (selected), Medium 500, and SemiBold 600. A red box highlights the text '不同字重' (Different font weights) over the font preview. On the right, there are tabs for Web, Android, iOS, and Flutter. The Web tab is active, showing the embed code and CSS classes. A red box highlights the CSS class for the ExtraLight weight: `.noto-serif tc-extralight { font-family: "Noto Serif TC", serif; font-weight: 200; font-style: normal; }`.

Google Fonts

Noto Serif Traditional Chinese S

鑑於對人類家

不同字重

ExtraLight 200

Light 300

Regular 400

Medium 500

SemiBold 600

Web Android iOS Flutter

@import

Embed code in the <head> of your html

```
<link rel="preconnect" href="https://fonts.goo
gleapis.com">
<link rel="preconnect" href="https://fonts.gst
atic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?
family=Noto+Serif+TC:wght@200;400&display=swa
p" rel="stylesheet">
```

Copy code

Noto Serif TC: CSS classes

```
.noto-serif tc-extralight {
  font-family: "Noto Serif TC", serif;
  font-weight: 200;
  font-style: normal;
}
```

```
.noto-serif tc-regular {
  font-family: "Noto Serif TC", serif;
```

截圖：<https://fonts.google.com/selection?classification=Handwriting>

版權宣告

- 本篇PPT所引用之圖片僅為教學說明使用非商業用途，出處皆有標註於各圖片下方。著作權歸圖片原作者所有，請勿引作其他商業用途。