




**POLITECNICO**  
**MILANO 1863**

**SCUOLA DI INGEGNERIA INDUSTRIALE  
E DELL'INFORMAZIONE**

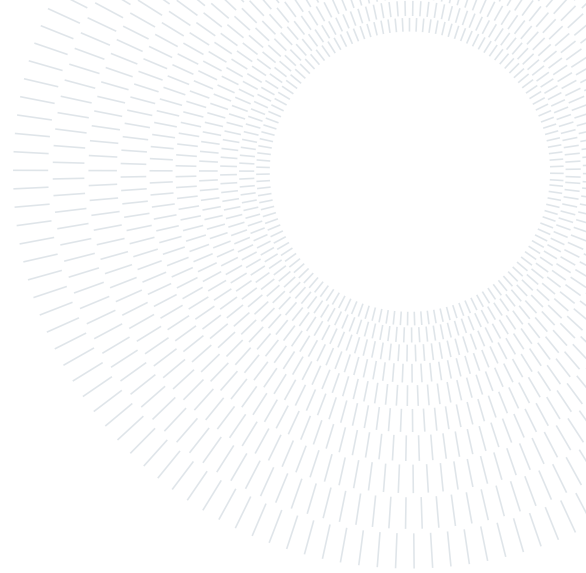

## Title

**MSc IN SPACE ENGINEERING**

### Authors:

10723712	MARCELLO PARESCHI	(BSc AEROSPACE ENGINEERING - POLITECNICO DI MILANO)
10836125	DANIELE PATERNOSTER	(BSc AEROSPACE ENGINEERING - POLITECNICO DI MILANO)
10711624	ALEX CRISTIAN TURCU	(BSc AEROSPACE ENGINEERING - POLITECNICO DI MILANO)
10884250	TAMIM HARUN OR	(BSc AEROSPACE ENGINEERING - INTERNATIONAL ISLAMIC UNIVERSITY MALAYSIA)

**Professor: CAMILLA COLOMBO**

**Academic year: 2023-2024**

---

## Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

# Contents

<b>Abstract</b>	<b>I</b>
<b>Contents</b>	<b>II</b>
<b>1 Interplanetary mission</b>	<b>1</b>
1.1 Symbols . . . . .	1
1.2 Introduction . . . . .	1
1.2.1 Description of the problem . . . . .	1
1.2.2 Assigned data and constraints . . . . .	1
1.3 Algorithms description . . . . .	1
1.3.1 Refined brute force algorithm . . . . .	2
1.4 Reduction of the time windows . . . . .	3
1.4.1 Resonance period analysis . . . . .	3
1.4.2 Cost-plot analysis . . . . .	3
1.4.3 Final time window selection . . . . .	3
1.5 Conclusion and results . . . . .	4
<b>2 Planetary mission</b>	<b>5</b>
<b>Bibliography</b>	<b>6</b>

# 1. Interplanetary mission

## 1.1. Symbols

### Analisi della missione

$A_e$	$[m^2]$	area di efflusso totale
$\phi$	$[rad]$	angolo di traiettoria del razzo

### Analisi della missione 2

$A_e$	$[m^2]$	area di efflusso totale
$\phi$	$[rad]$	angolo di traiettoria del razzo

## 1.2. Introduction

### 1.2.1. Description of the problem

The first part of the assignment aims at designing an interplanetary transfer from Mars to asteroid 1036 Ganymed exploiting a powered gravity assist on Earth. The problem is analyzed through the patched conics method, without considering the injection and arrival hyperbolae. The initial and final velocity vector of the satellite are assumed to be the same of the respective celestial body. The two heliocentric legs are calculated through the Lambert problem. The trajectory is selected with the only criteria of minimizing the cost of the mission, assessed through the total  $\Delta V$ . The latter is computed by summing different contributions:

$$\Delta V_{tot} = \Delta V_1 + \Delta V_2 + \Delta V_3 \quad (1.1)$$

where  $V_{-,i}$  and  $V_{+,i}$  are the velocity vectors before and after the  $i$ -th manoeuvre respectively. Where the three terms are defined as:

- $\Delta V_1$  related to the injection in the first heliocentric leg;
- $\Delta V_2$  related to the exit from the second heliocentric leg;
- $\Delta V_3$  related to the impulse given by the engine at pericentre of hyperbola fly-by;

All the manoeuvres are assumed to be impulsive, i.e. they change only the velocity vector of the spacecraft, maintaining invariated the position vector. Note that  $\Delta V_1$  and  $\Delta V_2$  are related to heliocentric velocities, while  $\Delta V_3$  is calculated through relative geocentric velocities.

For each manoeuvre the cost is computed as:

$$\Delta V_i = \|V_{+,i} - V_{-,i}\| \quad (1.2)$$

### 1.2.2. Assigned data and constraints

A few constraints were considered:

- earliest departure date  $t_{min,dep} = [01/01/2028 \ 00 : 00 : 00]$  in Gregorian calendar
- latest arrival date  $t_{max,arr} = [01/01/2058 \ 00 : 00 : 00]$  in Gregorian calendar
- time of flights of the two heliocentric arcs must be greater than the associated parabolic time
- minimum pericentre radius of the fly-by hyperbola  $r_p = r_E + 500 \ km$
- single-revolution Lambert problem was considered
- reasonable total time of the mission

Note that the constraint on the pericentre radius of the fly-by is considered both for avoid impact on Earth and to prevent undesired atmospheric drag effects.

## 1.3. Algorithms description

The targeting problem previously defined can be seen as an optimization problem with three degrees of freedom (DOFs). Indeed, once the departing date and the two times of flight of the heliocentric legs are chosen, both the Lambert's arcs and the fly-by hyperbola are fully defined. Regarding the formulation of the Lambert's problem, it requires the knowledge of the initial and final position and also the imposed time of flight between them. For two Lambert's arcs it would be needed a total of six DOFs, but this quantities are dependant one to each other:

- the final position vector of the first arc corresponds to the initial position of the second one;
- the initial date for the departing on the second arc corresponds the arrival date on the first arc;
- fixing the first Lambert's arc, the final position and arrival date for the second Lambert's arc are related through the analytical ephemerides.

Once the two heliocentric legs are determined, the powered gravity assist follows as the geocentric velocity vectors are known.

The method implemented to solve the optimization problem is the **brute force algorithm** refined with the **gradient descent algorithm**. Then, to validate the results, the **brute force algorithm** has been used solely with a more dense search grid in a reasonable domain.

### 1.3.1. Refined brute force algorithm

---

#### Algorithm 1 Bruteforce algorithm

---

```

Require:  $T_{dep}, \Delta T_1, \Delta T_2$ 
 $\Delta V_{min} = 10^{10}$ 
for  $i$  in  $T_{dep}$  do
  for  $j$  in  $\Delta T_1$  do
    Calculate  $T_{fly-by}$ 
    Calculate first Lambert's arc
    Calculate Mars' velocity at  $T_{dep}$ 
    Calculate  $\Delta V_1$ 
    for  $k$  in  $\Delta T_2$  do
      Calculate  $T_{arr}$ 
      Calculate second Lambert's arc
      Calculate Asteroid's velocity at  $T_{arr}$ 
      Calculate  $\Delta V_2, \Delta V_3, \Delta V_{tot}$ 
      if  $\Delta v_{tot} < \Delta v_{min}$  and  $r_p > r_{Earth} + 500 \text{ km}$  then
         $\Delta v_{min} = \Delta v_{tot}$ 
         $T_{dep,min} = T_{dep}$ 
         $T_{fb,min} = T_{fb}$ 
         $T_{arr,min} = T_{arr}$ 
      end if
    end for
  end for
end for

Minimize cost using fminunc with initial guess  $(T_{dep,min}; T_{fb,min}; T_{arr,min})$ 
return  $\Delta V_{min}; T_{dep,min}; T_{fb,min}; T_{arr,min}$ 

```

---

The presented [Algorithm 1](#) is reliable, yet computationally demanding since the research of the minimum is performed through a triple-nested *for* loop. The time of the execution highly depends on the refinement chosen for the three selected periods of time. From this considerations and also noticing that the function to minimize presents high irregularities, it is clear that narrow time windows can help in the overall research. Moreover, with this last observation, it is possible to use a less fine grid of research, since it is reasonable to think that the function will present less irregularities.

As a consequence, it was decided to perform a physical analysis ([section 1.4](#)) in order to wisely reduce the time domains for departure, fly-by and arrival. The idea of [Algorithm 1](#) is that, once this reduction is performed, the brute-force search can be carried out on a small but refined grid. To speed up the process and refine the solution, *fminunc* of MATLAB was used. The selected initial guess is the outcome of the brute force research.

In order to completely validate the results, the robustness of the brute force algorithm has been exploited. Referring to [Algorithm 1](#), *fminunc* was removed after the *for*-loop search and the research grid was refined. Moreover, with this computation it is possible to validate the time reduction analyzed in [section 1.4](#).

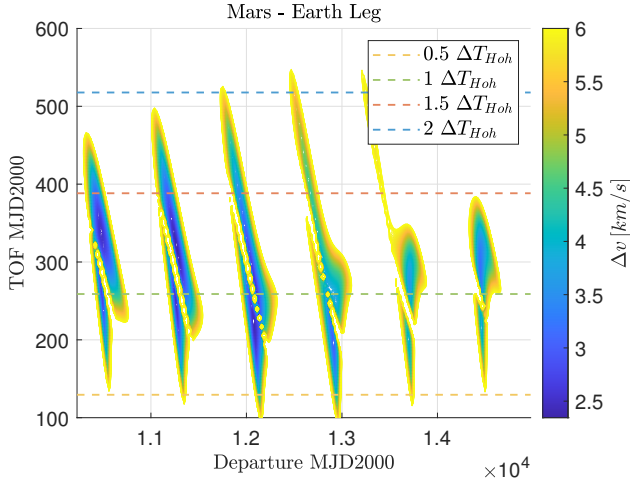


Figure 1.1: aa

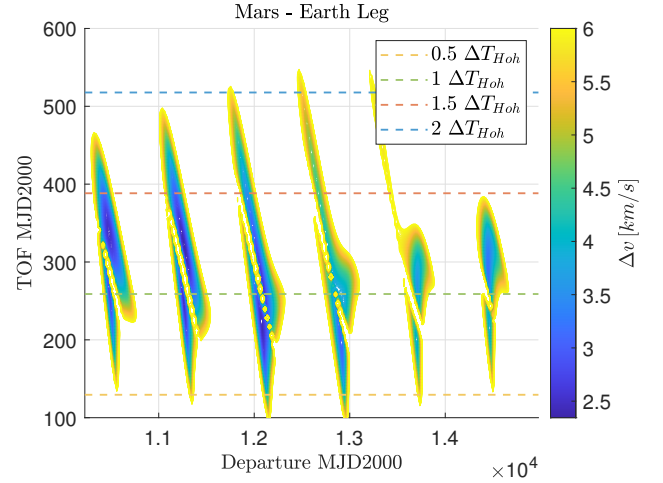


Figure 1.2: aaa

## 1.4. Reduction of the time windows

### 1.4.1. Resonance period analysis

The first natural reduction on the domain of interest that could come to mind is to search the frequency on which the three celestial bodies repeat the relative positions on their orbits. On the approximation of circular orbits, this particular time period would be the synodic period generalized for the case of three bodies. However, this path is unviable because the orbit of the asteroid has a relevant eccentricity. To better comprehend the problem of having that eccentricity, particular attention have to be paid on the definitions of phasing and synodic period for two bodies:

- **Phasing  $\phi$**  → the angle between two celestial bodies, calculated as the difference in their **true anomalies**:

$$\phi(t) = \theta^{(2)}(t) - \theta^{(1)}(t) \quad (1.3)$$

- **Synodic period  $T_{syn}$**  → if two celestial bodies have initial phasing  $\phi_0$ , they will return to the same phasing after a synodic period  $T_{syn}$ :

$$\phi(t_0) = \phi_0 \rightarrow \phi(t_0 + T_{syn}) = \phi_0 \quad (1.4)$$

As the definitions rely on the **true anomalies** of celestial bodies, non-circular orbits mean that the same phasing does NOT imply the same relative positions between them. In other words, once the synodic period has passed, the phasing of the three considered bodies could result in a completely different relative positions with respect to the initial condition.

The problem needs to be reformulated. The goal is to find the period of time that elapses between a state of orbital positions of the bodies and the next occurrence of the same state. In literature, this particular period is called **period of orbital resonance** and it will be here indicated as  $T_{res}$ . Supposing that the orbits keep the other Keplerian elements unchanged during the revolution, the relation on true anomalies can be expressed as:

$$\begin{cases} \theta^{(1)}(t_0) = \theta_0^{(1)} \\ \theta^{(2)}(t_0) = \theta_0^{(2)} \\ \theta^{(3)}(t_0) = \theta_0^{(3)} \end{cases} \rightarrow \begin{cases} \theta^{(1)}(t_0 + T_{res}) = \theta_0^{(1)} \\ \theta^{(2)}(t_0 + T_{res}) = \theta_0^{(2)} \\ \theta^{(3)}(t_0 + T_{res}) = \theta_0^{(3)} \end{cases} \quad (1.5)$$

Since the true anomaly for an orbit repeats itself every orbit period  $T$ , it results:

$$\begin{cases} \theta^{(1)}(t_0) = \theta_0^{(1)} \\ \theta^{(2)}(t_0) = \theta_0^{(2)} \\ \theta^{(3)}(t_0) = \theta_0^{(3)} \end{cases} \quad (1.6)$$

### 1.4.2. Cost-plot analysis

### 1.4.3. Final time window selection

## 1.5. Conclusion and results

[1]

## 2. Planetary mission

# Bibliography

[1] Howard D. Curtis. *Orbital Mechanics for Engineering Students*. Elsevier, 2014.