

Zomato Restaurant Dataset — EDA Report

1. Dataset Overview

Raw dataset: 9552 rows × 22 columns. Cleaned dataset: 9550 rows × 21 columns. The analysis covers cities, cuisines, cost, delivery, table booking, ratings, and votes.

2. Data Cleaning


Duplicates found: 0. Average Cost for two converted from object to float64; 1 value(s) became NaN during conversion. 2 corrupted row(s) dropped due to a broken multi-line address. Missing cuisine values were retained where possible.

3. Data Analysis


Unique cities: 141. Top city: New Delhi (5,473 restaurants). Most frequent cuisine: North Indian (3,960). Average rating: 2.6663. Highest votes: Toit with 10,934 votes. Average cost for two: 1199.33. Online delivery avg rating Yes 3.2488 vs No 2.4652 (diff 0.7836). Table booking avg rating Yes 3.4420 vs No 2.5593 (diff 0.8827).

4. Data Visualizations


Top 10 cities by restaurant count.

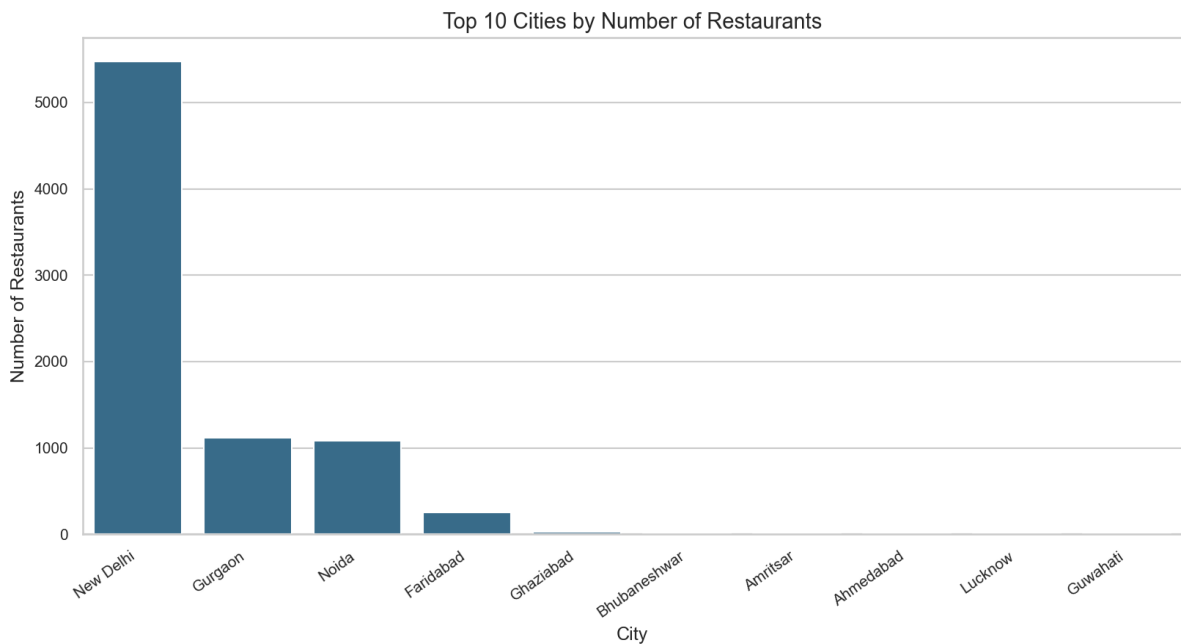


Distribution of aggregate ratings.

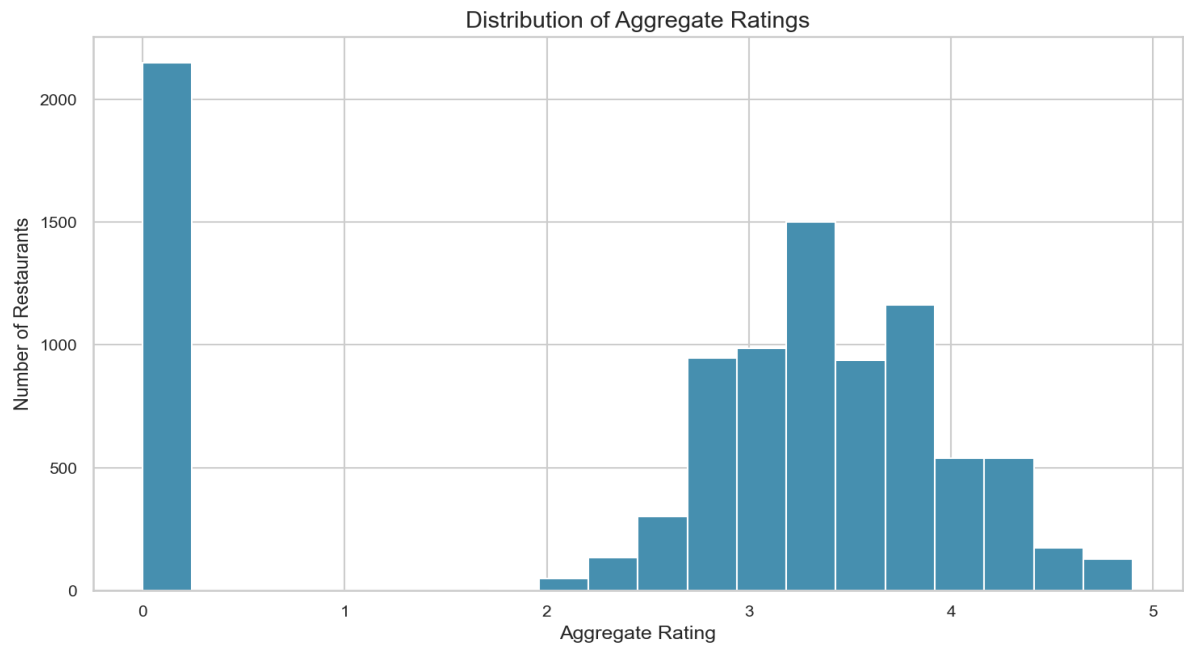

Online delivery Yes/No counts.

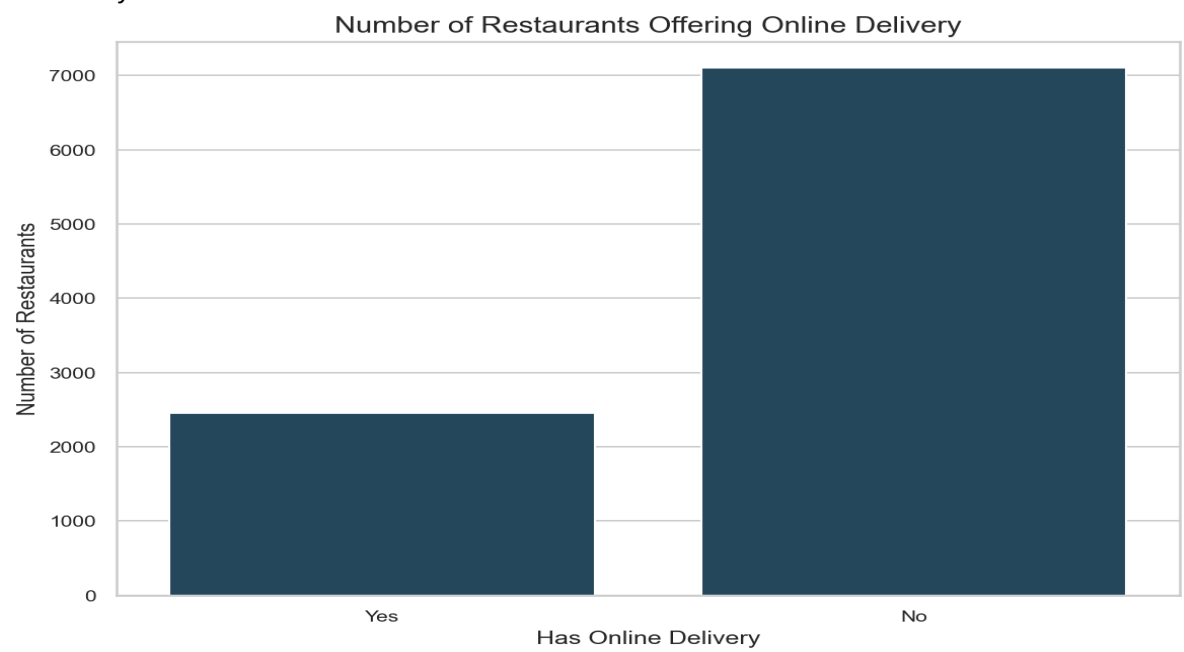

Top 10 cuisines after splitting multi-cuisine fields.

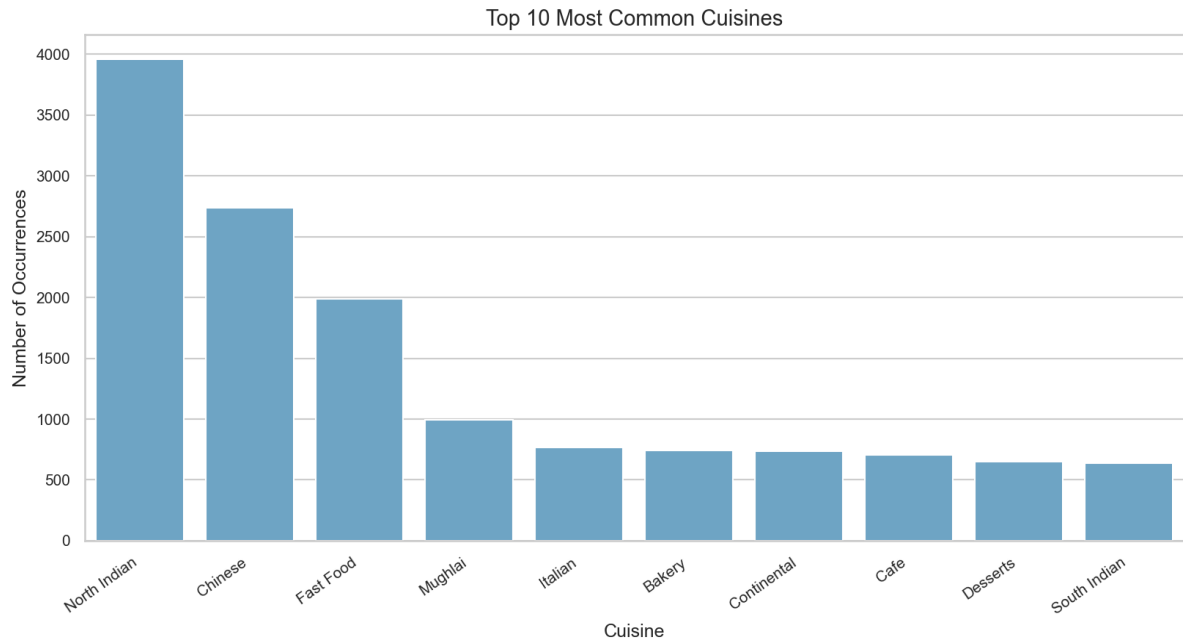

Average rating by ordered price range.



5. Conclusion

New Delhi has the highest restaurant presence. North Indian is the most popular cuisine tag. Restaurants with online delivery have higher average ratings (3.2488 vs 2.4652). Restaurants with table booking also show higher average ratings (3.4420 vs 2.5593). These are observational differences in this dataset, not causal claims. Limitation: average cost mixes currencies; rating 0 often means Not rated.