
Linux Commands Assignments - II

Objective: To learn and practice the "mkdir,rm,rmdir" commands in Linux.
Instructions:


1.Open the terminal in your Linux system.



2.Use the "cd" command to navigate to a directory where you would like to create a new directory.

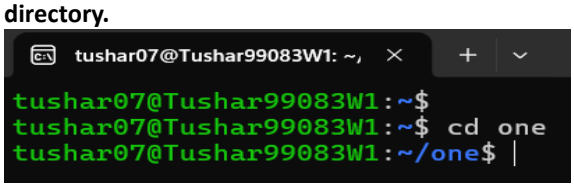

3.Use the "mkdir" command to create a new directory. The syntax for the "mkdir" command is as follows: mkdir [options] directory_name

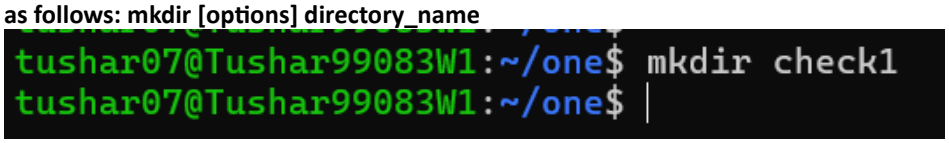

4. Try out the following examples and write down the commands you used to create each directory:

a. Create a directory named "my_directory".
b. Create a directory named "our_directory" inside the "my_directory" directory.
c. Create a directory named "new_directory" and make it hidden.
d. Create a directory named "pictures" with multiple subdirectories named "vacation", "family", and "friends".

```
tushar07@Tushar99083W1:~/one$ mkdir -p my_directory/our_directory/.new_direc
tory
tushar07@Tushar99083W1:~/one$ mkdir my_directory
tushar07@Tushar99083W1:~/one$ cd my_directory
tushar07@Tushar99083W1:~/one/my_directory$ cd ..
tushar07@Tushar99083W1:~/one$ mkdir my_directory/our_directory/.new_director
y
tushar07@Tushar99083W1:~/one$ mkdir delhi friends
tushar07@Tushar99083W1:~/one$
tushar07@Tushar99083W1:~/one$ ls
1.txt   111.txt  check1  friends   my_directory  webjava.txt
11.txt  3.txt    delhi   info.txt  two
tushar07@Tushar99083W1:~/one$
```

e. Create a directory named “dir1”

```
tushar07@Tushar99083W1:~/one/my_directory$ mkdir dri1
tushar07@Tushar99083W1:~/one/my_directory$
```

5.Use the "ls" command to verify that the new directories have been created successfully.

```
tushar07@Tushar99083W1:~/one/my_directory$ ls
dri1  our_directory
```

6.Use tree Command to see the above directory structure. (If it is not installed in your system, install it with the command “sudo apt-get install tree”

```
tushar07@Tushar99083W1:~/one$ tree
.
├── 1.txt
├── 11.txt
├── 111.txt
├── 3.txt
├── check1
├── delhi
├── friends
├── info.txt
├── my_directory
│   ├── dri1
│   └── our_directory
│       ├── bhilai
│       ├── durg
│       └── raipur
├── two
│   ├── 2.txt
│   ├── 22.txt
│   └── three
│       ├── 3.txt
│       ├── 33.txt
│       └── 333.txt
└── webjava.txt
```

7. Try out some of the additional options for the "mkdir" command (e.g., -p, -m, -v).
8. Try to delete the directory named “dir1”
9. Try to delete the directory named “pictures”

```
tushar07@Tushar99083W1:~/one/my_directory/our_directory$ ls
bhilai  durg  raipur
tushar07@Tushar99083W1:~/one/my_directory/our_directory$
tushar07@Tushar99083W1:~/one/my_directory/our_directory$ rm -r drill
rm: cannot remove 'drill': No such file or directory
tushar07@Tushar99083W1:~/one/my_directory/our_directory$ rm -r raipur
tushar07@Tushar99083W1:~/one/my_directory/our_directory$ ls
bhilai  durg
tushar07@Tushar99083W1:~/one/my_directory/our_directory$
```