

CS 160 Compilers

Lecture 2: OCaml Crash Course I

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

Yu Feng
Spring 2023

Introducing the cast

Sections:

- Thur 3-4pm (ILP 4209)
- 4-5pm (ILP 4209) Assignment Project Exam Help
- 5-6pm (ILP 2207) <https://tutorcs.com>

Instructor's office hour: Wed, 3-4pm, HFH 2157 WeChat: cstutorcs

TA's office hour:

- Jingtao Xia: Tue 1:30-2:30pm (Phelps 3523)
- Junrui Liu: Thur 11am-12pm (Phelps 3523)
- Thanawat Techaumnuauiwit: Fri 1-2pm (**CSIL**)

History of ML

- ML = “Meta Language”
- Designed by Robin Milner @ Edinburgh
- Language to manipulate Theorems/Proofs
- Several dialects:
 - Standard” ML (of New Jersey)
 - French dialect with support for objects
 - State-of-the-art
 - Extensive library, tool, user support

<https://tutorcs.com>

WeChat: cstutorcs



Who are using OCaml



Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs



Bloomberg



OCaml vs. C

```
void sort(int arr[], int beg, int end){
    if (end > beg + 1){
        int piv = arr[beg];
        int l = beg + 1;
        int r = end;
        while (l != r-1){
            if(arr[l] <= piv)
                l++;
            else
                swap(&arr[l], &arr[r--]);
        }
        if(arr[l]<=piv && arr[r]>piv)
            l=r+1;
        else if(arr[l]<=piv && arr[r]>piv)
            {l++; r--;}
        else if (arr[l]>piv && arr[r]<=piv)
            swap(&arr[l++], &arr[r--]);
        else
            r=l-1;
        swap(&arr[r--], &arr[beg]);
        sort(arr, beg, r);
        sort(arr, l, end);
    }
}
```

Quicksort in C

```
let rec sort l =
  match l with [] -> []
  | (h::t) ->
    let (l,r)= List.partition ((<=) h) t in
    (sort l)@h::(sort r)
```


Quicksort in Ocaml

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

ML's holy grail

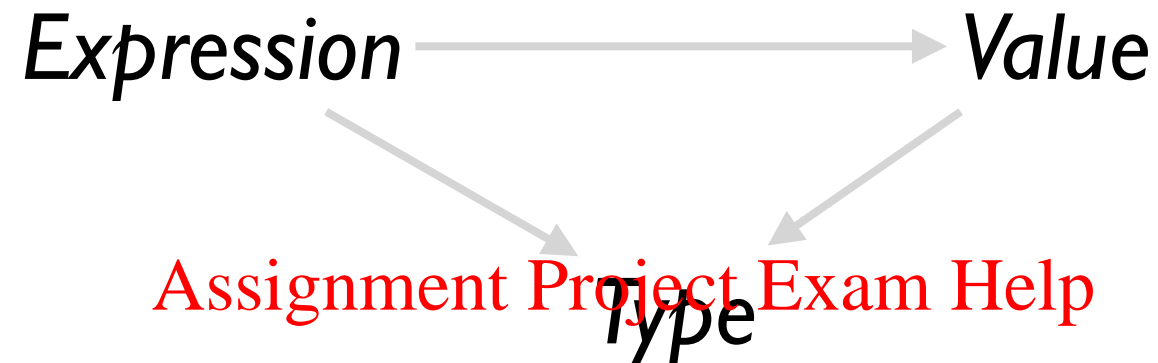

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

- Everything is an expression
- Everything has a value
- Everything has a type

Interacting with ML

“Read-Eval-Print” Loop

Repeat: [Assignment Project Exam Help](https://tutorcs.com)

1. System reads expression e <https://tutorcs.com>
2. System evaluates e to get value v [WeChat: cstutorcs](#)
3. System prints value v and type t

What are these expressions, values and types ?

Basic types

```
# 2;;
```

2



```
# 2+3;;
```

Int

5

Assignment Project Exam Help

<https://tutorcs.com>

```
# "hi";;
```

WeChat: cstutorcs

"hi"



```
# "hi," ^ "0Caml";;
```

String

"hi, 0Caml"

```
# true;;
```

true



```
# 2>3;;
```

Bool

false

Type errors

`# "Hi," ^ 2;;`
`# (2+3) || 9;;`
<https://tutorcs.com>

WeChat: cstutorcs

Untypable expression is rejected

- No casting or coercing
- Fancy algorithm to catch errors
- ML's single most powerful feature

Complex types: Lists

List operators:

- Cons (::): “cons” element to a list of same type
- append (@): only append two list of the same type
- Head (List.hd): return the head element of a nonempty list
- Tail (List.tl): return the tail of nonempty list

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

Syntax:

- Lists = semicolon

Semantics:

- Same type, unbounded number

Complex types: Tuples

```
# (9-3, "ab"^"cd", (2+2, 7>8)) ; ;
```

```
(6, "abcd", (4, false))
```

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

Syntax:

- Lists = comma

Semantics:

- Different type, fixed number

Variables and bindings

let $x = e$

“Bind the value of expression e to the variable x ”

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

```
# let x = 2+2;;  
val x : int = 4
```

Variables and bindings

Later declared expressions can use x

- Most recent “bound” value used for evaluation

Assignment Project Exam Help
<https://tutorcs.com>
WeChat: cstutorcs

```
# let x = 2+2;;  
val x : int = 4  
# let y = x * x * x;;  
val y : int = 64  
# let z = [x;y;x+y];;  
val z : int list = [4;64;68]
```

Variables and bindings

Undeclared variables (i.e. without a value binding)
are not accepted !

Assignment Project Exam Help

```
# let p = a + 1;  
Characters 8-9:  
let p = a + 1 ;;  
^ Unbound value a
```

Local bindings

for expressions using “temporary” variables

```
# let tempVar = x + 2 * y
  in tempVar * tempVar ;;
```

Assignment Project Exam Help
<https://tutorcs.com>
WeChat: cstutorcs

- tempVar is bound only inside expr body from in ... ;;
- Not visible (“in scope”) outside

Complex types: functions

`# fun x -> x+1;;` \rightarrow `<fun>`

Parameter
(formal)

Body
(expr)

int \rightarrow int

Assignment Project Exam Help

<https://tutorcs.com>


WeChat: cstutorcs

```
# let inc = fun x -> x+1 ;  
val inc : int -> int = fn  
# inc 0;  
val it : int = 1  
# inc 10;  
val it : int = 11
```

How to evaluate a function app:

- Evaluate the argument
- Bind formal to arg value
- Evaluate the “body expr”

Complex types: functions

`# fun x -> fun y -> x < y;;`  `<fun>`

`'a -> ('a -> bool)`
Assignment Project Exam Help

Wow! A function can return a function
<https://tutorcs.com>

WeChat: cstutorcs

```
# let lt = fun x -> fun y -> x < y;;  
val lt : 'a -> 'a -> bool = fn  
# let is5Lt = lt 5;  
val is5lt : int -> bool = fn;;  
# is5lt 10;;  
val it : bool = true;  
# is5lt 2;;  
val it : bool = false;
```

Complex types: functions

`# fun f -> fun x -> not (f x);;`  `<fun>`

`('a->bool)->('a->bool)`
Assignment Project Exam Help

<https://tutorcs.com>
A function can also take a function argument

WeChat: cstutorcs

```
# let neg = fun f -> fun x -> not (f x);  
val lt : (a -> bool) -> a -> bool = fn  
# let is5gte = neg is5lt;  
val is5gte : int -> bool = fn  
# is5gte 10;  
val it : bool = false;  
# is5gte 2;  
val it : bool = true;
```

Pattern matching

A pattern matching is somewhat similar to switch statement but offers a lot more expressive power. It really boils down to matching an argument against an exact value, a predicate, or a type constructor.

Assignment Project Exam Help

<https://tutorcs.com>

```
type animal = Dog of string | Cat of string ;;
```

```
let say x =  
  match x with  
    | Dog x -> x ^ " says woof"  
    | Cat x -> x ^ " says meow"  
  
;;  
  
say (Cat "Tom") ;; (* "Tom says meow". *)
```

Put it together: a “filter” function

If arg matches
this pattern

then use this
body expr

```
# let rec filter f l =  
  match l with  
    [] -> []  
  | (h::t) -> if f h then h::(filter f t)  
               else (filter f t);;  
  
val filter : ('a -> bool) -> 'a list -> 'a list = <fun>  
  
# let list1 = [1;31;12;4;7;2;10];;  
# filter is5lt list1 ;;  
val it : int list = [31;12;7;10]
```

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

Put it together: a “quicksort” function

```
# let partition f l = (filter f l, filter (neg f) l);;  
val partition : ('a->bool)->'a list->'a list * 'a list = fn  
# let list1 = [1,31,12,4,7,2,10];  
# partition is5lt list1 ;  
val it : (int list * int list) = ([31,12,7,10], [1,2,10])
```

WeChat: cstutorcs

```
# let rec sort l =  
  match l with  
  [] -> []  
| (h::t) ->  
  let (l,r) = partition ((<) h) t in  
  (sort l)@(h::(sort r)) ;;
```

TODOs by next lecture

- Get familiar with OCaml
- Come to the discussion session if you are new to OCaml

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs