

CS 160 Compilers

Lecture 8: Introduction to Parsing


Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

Yu Feng
Fall 2021


A typical flow of a compiler

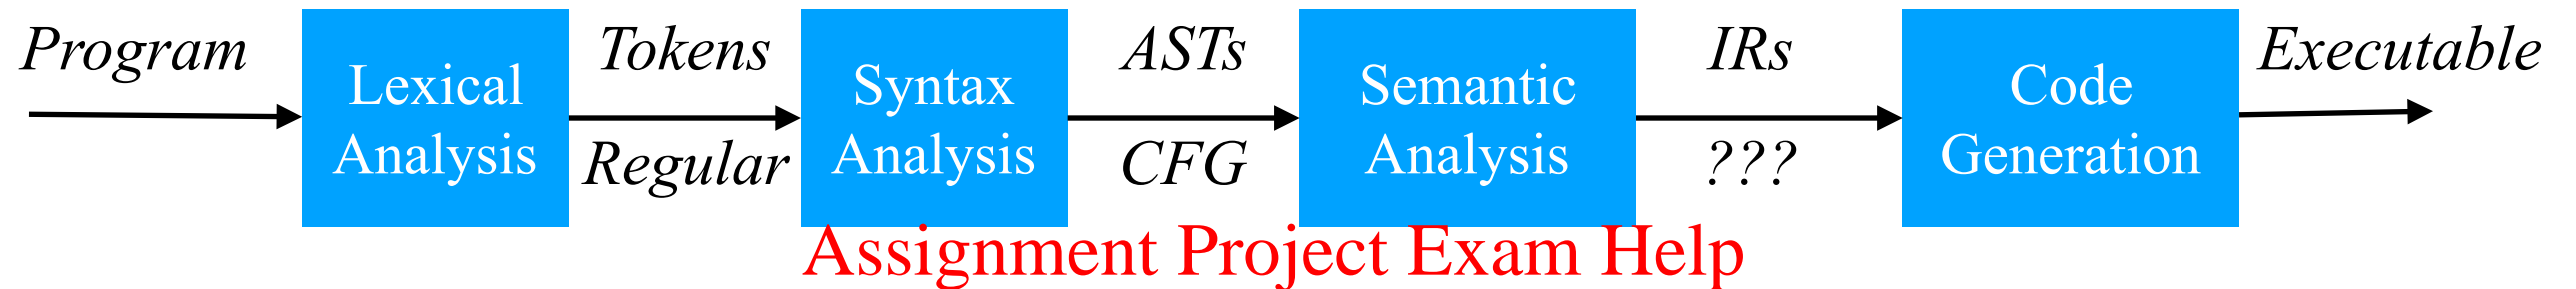

<https://tutorcs.com>

WeChat: cstutorcs

Chomsky hierarchy

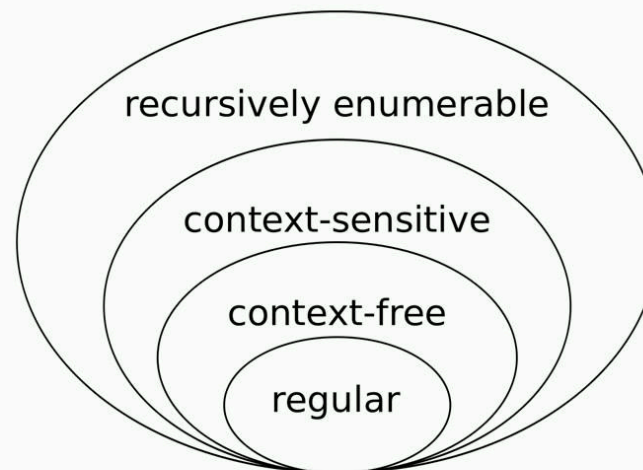

<https://en.wikipedia.org/wiki/File:Chomsky-hierarchy.svg>

Lexical analysis

- Consider the following λ^+ program:

if $x > y$

then 10

else 8

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

- This program is just a string of characters

`if x > y\nthen\t10\nelse\t8`

- Goal: Portion the input string into substrings where the substrings are *tokens*

The role of a parser


Phase	Input	Output
Lexer	String of characters	String of tokens
Parser	String of tokens	Parse tree

<https://tutorcs.com>

- Input: sequence of tokens from the lexer
- Output: parse tree (Abstract Syntax Tree) of the program

Example

- Input: Consider the previous Patina expression: **if** x>y **then** 10 **else** 8
- Parse Input: TOKEN_IF TOKEN_ID("x") TOKEN_GT
TOKEN_ID("y") ~~Assignment Project Exam Help~~ TOKEN_THEN TOKEN_INT(10) TOKEN_ELSE
TOKEN_INT(8)
<https://tutorcs.com>
WeChat: cstutorcs
- Parser Output:

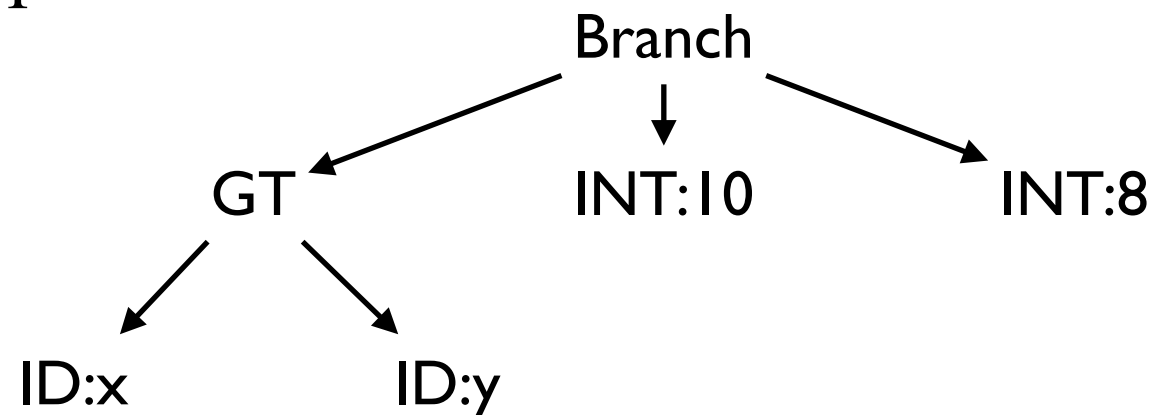

The role of a parser

- Not all strings of tokens are programs...
- Parser must distinguish between valid and invalid strings of tokens
 - <https://tutorcs.com>
 - WeChat: cstutorcs
- What we need:
 - A language for describing valid strings of tokens
 - A method for recognizing if a string of tokens is in this language or not

Context free grammar (CFGs)

- Programming language constructs have *recursive* structure

Assignment Project Exam Help

- Example: A Patina expression is

<https://tutorcs.com>

- *expression* + *expression*,

WeChat: cstutorcs

- **if** *expression* **then** *expression* **else** *expression*, ...

- Context free grammars are a natural notation for this recursive structure

CFGs in more detail

- A CFG consists of:
 - A set of terminals T
Assignment Project Exam Help
<https://tutorcs.com>
 - A set of non-terminals N
WeChat: cstutorcs
 - A start symbol S (non-terminal)
 - A set of productions: $X \rightarrow Y_1 Y_2 \dots Y_n$

where $X \in N$ and $Y_i \in (T \cup N \cup \{\varepsilon\})$

CFGs example

- Recall the earlier fragment of Patina:

$EXPR \rightarrow \text{if } EXPR \text{ then } EXPR \text{ else } EXPR$

| $EXPR + EXPR$

| ID

<https://tutorcs.com>

WeChat: cstutorcs

- Some strings in this language:

ID

$IF\ ID\ THEN\ ID\ ELSE\ ID$

$ID + ID$


$IF\ ID\ THEN\ ID+ID\ ELSE\ ID$

$IF\ IF\ ID\ THEN\ ID\ ELSE\ IF\ THEN\ ID\ ELSE\ ID$

From derivations to parse trees

- A derivation is a sequence of productions: $S \rightarrow \dots \rightarrow \dots \rightarrow \dots$
- A derivation can be drawn as a tree
- Start symbol is the tree's root
- For a production $X \rightarrow Y_1 \dots Y_n$ add children $Y_1 \dots Y_n$ to node X

E
→ E+E
→ E*E+E
→ id*E+E
→ id*id + E
→ id*id + id

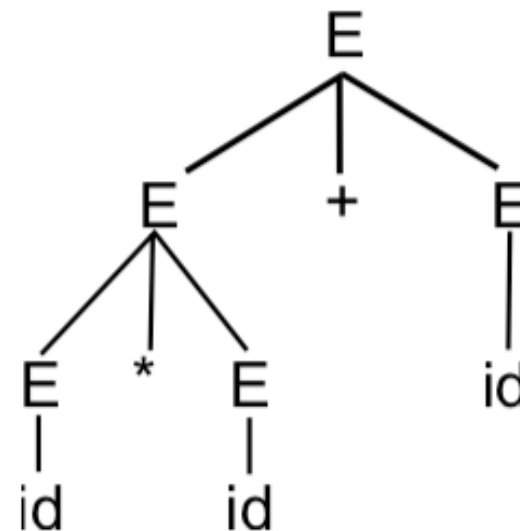

Ambiguity

- Consider this grammar:

$EXPR \rightarrow E * E$

$| E + E \mid (E)$


$| id$

Assignment Project Exam Help

<https://tutorcs.com>

- Now, this string $id * id + id$ has two parse trees!

WeChat: cstutorcs

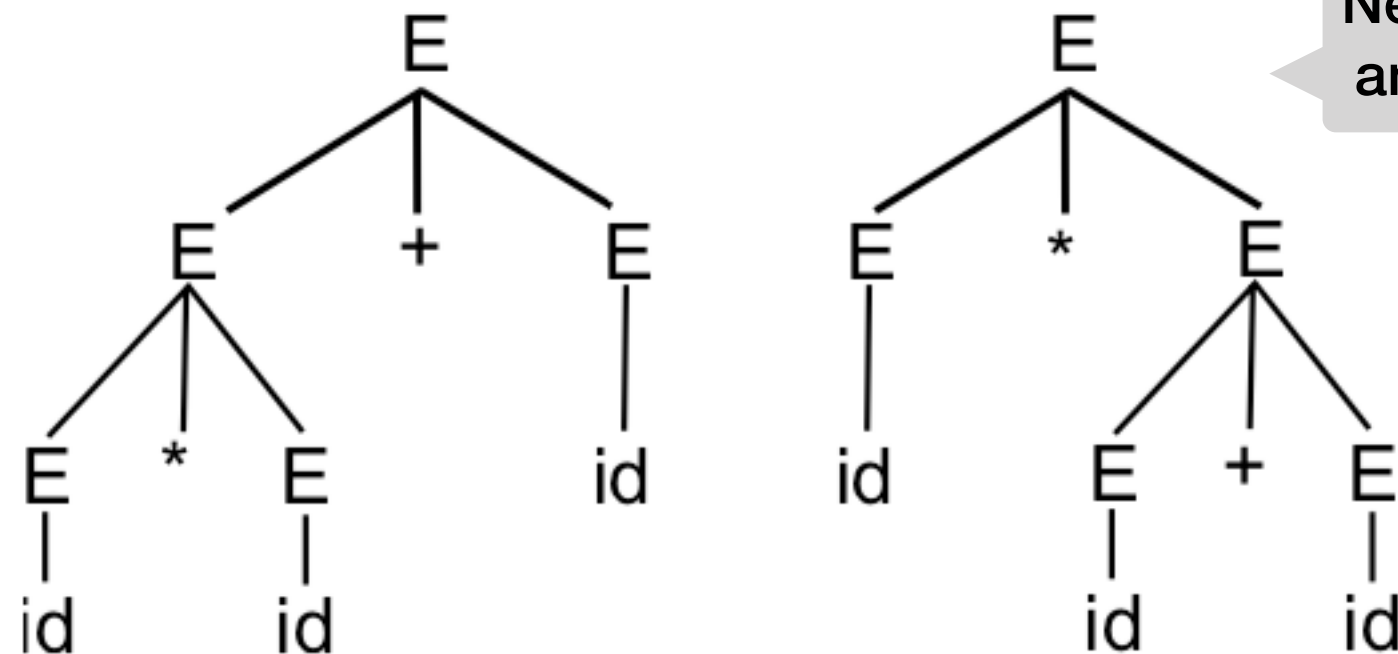

Need Precedence
and Associativity

TODOs by next lecture

- Hw2 is out. Please start early!
- Come to the discussion session if you have questions

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs