



Assignment Project Exam Help

Normalisation – Part 1

<https://tutorcs.com>

WeChat: cstutorcs



Schema Design

Assignment Project Exam Help

- A driving force for **the study of dependencies** has been **schema design**.
- The goal of schema design is to select **the most appropriate schema** for a particular database application.
- The **choice of a schema** is guided by **semantic information** about the application data provided by users and captured by dependencies.
- A common approach starts with a **universal relation** and applies decomposition to create new relations that satisfy certain normal forms (i.e. **normalization**).

<https://tutorcs.com>

WeChat: cstutorcs


Normal Forms

Normal forms	Test criteria
1NF	weak
2NF	
3NF	
BCNF	
	strong

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

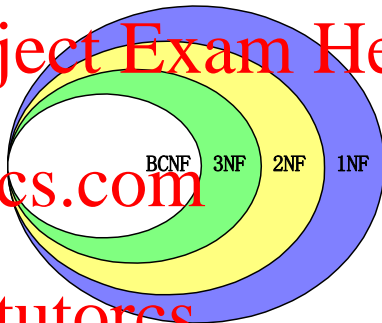

● **Note that:**

- 1NF is not based on any constraints.
- 2NF, 3NF and BCNF are based on keys and functional dependencies.
- 4NF and 5NF are based on other constraints (will not be covered).



Normalisation

Assignment Project Exam Help

- Decomposing a relation into **smaller relations in a certain normal form**

- Each normal form reduces certain kind of data redundancy.

- Each normal form does not have certain types of (undesirable) dependencies.

- What normal forms will we learn?

1 Boyce-Codd normal form (**BCNF**)

2 Third normal form (**3NF**)

<https://tutorcs.com>
WeChat: cstutorcs



BCNF - Definition

Assignment Project Exam Help

- A relation schema R is in **BCNF** if whenever a non-trivial FD $X \rightarrow A$ holds in R , then **X is a superkey**.
- When a relation schema is in BCNF, all data redundancy based on functional dependency are removed.

• Note: this does not necessarily mean a good design.

WeChat: cstutorcs

Do not represent the same fact twice (within a relation)!



Normalisation to BCNF

Assignment Project Exam Help

- Consider the relation schema TEACH with the following FDs:

- $\{\text{StudentID}, \text{CourseName}\} \rightarrow \{\text{Instructor}\};$
- $\{\text{Instructor}\} \rightarrow \{\text{CourseName}\}.$

<https://tutorcs.com>

WeChat: cstutorcs

TEACH		
StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u34567	Databases	Mark

- Is TEACH in BCNF?**

- Not in BCNF because of $\{\text{Instructor}\} \rightarrow \{\text{CourseName}\}.$



Normalisation to BCNF

Assignment Project Exam Help

- Algorithm for a BCNF-decomposition

Input: a relation schema R' and a set Σ of FDs on R' .


Output: a set \mathcal{S} of relation schemas in BCNF, each having a set of FDs

- Start with $\mathcal{S} = \{R'\}$;
- Do the following for each $R \in \mathcal{S}$ iteratively until no changes on \mathcal{S} :
 - Find a (non-trivial) FD $X \rightarrow Y$ on R that violates BCNF, if any;
 - Replace R in \mathcal{S} by two relation schemas XY and $(R - Y)$ and project the FDs to these two relation schemas.



Normalisation to BCNF

Assignment Project Exam Help

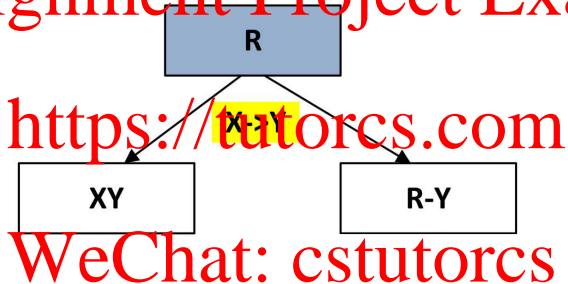


Normalisation to BCNF

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

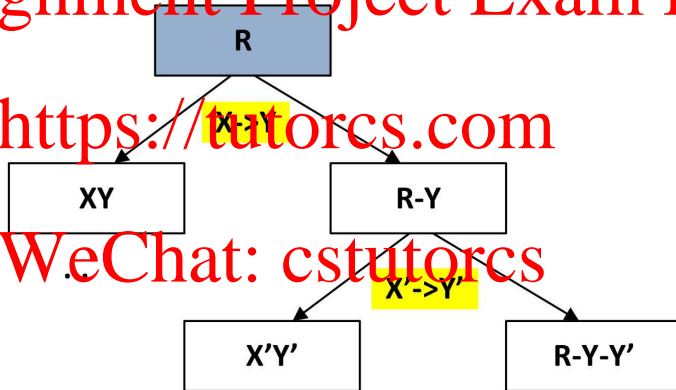



BCNF - Example

- Consider TEACH with the following FDs again:

- $\{ \text{StudentID}, \text{CourseName} \} \rightarrow \{ \text{Instructor} \},$
- $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \}.$

<https://tutorcs.com>

TEACH		
StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

- Can we normalise TEACH into BCNF?

WeChat: cstutorcs



BCNF - Example

- Consider TEACH with the following FDs again:

- $\{ \text{StudentID}, \text{CourseName} \} \rightarrow \{ \text{Instructor} \};$
- $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \}.$

<https://tutorcs.com>

TEACH		
StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

- Replace TEACH with R_1 and R_2 :

R_1	
CourseName	Instructor
Operating Systems	Jane
Databases	Mark

R_2	
StudentID	Instructor
u123456	Jane
u234567	Jane
u234567	Mark



BCNF - Example

- Consider the relation schema TEACH with the following FDs:

- $\{ \text{StudentID}, \text{CourseName} \} \rightarrow \{ \text{Instructor} \};$
- $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \}.$

<https://tutorcs.com>

StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

WeChat: cstutorcs

R_1

CourseName	Instructor
Operating Systems	Jane
Databases	Mark

R_2

StudentID	Instructor
u123456	Jane
u234567	Jane
u234567	Mark

- Does this decomposition preserve all FDs on TEACH?



BCNF - Example

- Consider the relation schema TEACH with the following FDs:

- $\{ \text{StudentID}, \text{CourseName} \} \rightarrow \{ \text{Instructor} \}$; Lost!
- $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \}$.

<https://tutorcs.com>

TEACH		
StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

WeChat: cstutorcs

R_1

CourseName	Instructor
Operating Systems	Jane
Databases	Mark

R_2

StudentID	Instructor
u123456	Jane
u234567	Jane
u234567	Mark

- No. We only have $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \}$ on R_1 .



Two Properties

Assignment Project Exam Help

- We need to consider the following properties when decomposing a relation:

1. **Lossy join** – “capture the same data”
<https://tutores.com>

To disallow the possibility of generating spurious tuples when a NATURAL JOIN operation is applied to the relations after decomposition.

2. **Dependency preservation** – “capture the same meta-data”
[WeChat: cstutores](https://tutores.com)

To ensure that each functional dependency can be inferred from functional dependencies after decomposition.



Two Properties

Assignment Project Exam Help

● Facts

(1) There exists an algorithm that can generate a **lossless decomposition** into BCNF.

(2) However, a BCNF-decomposition that is **both lossless and dependency-preserving** does not always exist.

WeChat: cstutorcs

- Does there exist a **less restrictive normal form** such that a lossless and dependency preserving decomposition can always be found?