


PROGRAM A: SEQUENTIAL FILE ALLOCATION

C PROGRAM

```
#include <stdio.h>

int main() {
    int start, length, i;
    printf("Enter Starting Block: ");
    scanf("%d", &start);
    printf("Enter File Length (Number of Blocks): ");
    scanf("%d", &length);
    printf("\nAllocated Blocks:\n");
    for (i = 0; i < length; i++) {
        printf("%d ", start + i);
    }
    printf("\n");
    return 0;
}
```

SHELL SCRIPT

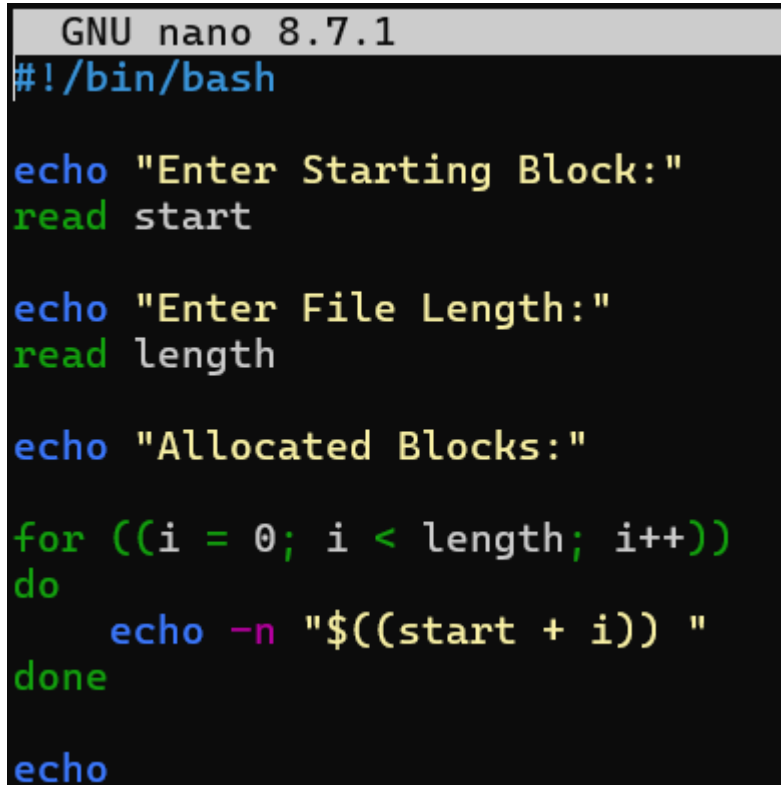

```
GNU nano 8.7.1
#!/bin/bash

echo "Enter Starting Block:"
read start

echo "Enter File Length:"
read length

echo "Allocated Blocks:"

for ((i = 0; i < length; i++))
do
    echo -n "$((start + i)) "
done

echo
```

Output :

```
(ganesh@LAPTOP-R3RDH9NG)~  
$ nano sequentials.sh  
  
(ganesh@LAPTOP-R3RDH9NG)~  
$ chmod +x sequentials.sh  
  
(ganesh@LAPTOP-R3RDH9NG)~  
$ bash sequentials.sh  
Enter Starting Block:  
12  
Enter File Length:  
5  
Allocated Blocks:  
12 13 14 15 16
```