Table of Contents

```
Test with New Voices (roommates) 6
Test Rejection Ability 6
응 {
Main script for MATLAB Project voice_recognition
Authors: Tanuj Kalakuntla, Trevor Vidano
Date: 03/20/2021
In accordance with the completion of UC Davis' EEC 201: Digital Signal
Processing.
clc; clear all; close all;
```

Collect Training Data

```
numSpeakers = 11;
TrainDir = fullfile('Data','Training_Data');
TrainDataBase = cell(1,numSpeakers);
for i = 1:numSpeakers
    filename = 's' + string(i) + '.wav';
    [audio,Fs] = audioread(fullfile(TrainDir,filename));
    TrainDataBase{i} = {audio,Fs};
end
```

Build Codebook for each Train Data

Collect Test Data

```
TestDir = fullfile('Data','Test_Data');
```

```
TestDataBase = cell(1,8);
TestCases = [(1:8)',randperm(8)'];
for i = 1:8
    filename = 's' + string(TestCases(i,2)) + '.wav';
    [audio,Fs] = audioread(fullfile(TestDir,filename));
    TestDataBase{i} = {audio,Fs};
end
```


Classify Test Data


```
[testMatch,err] = classifier.classify(TestDataBase);
% Compute error statistics
accuracy = mean(TestCases(:,2)==cell2mat(testMatch));
fprintf('With Train/Test dataset provided: ');
fprintf('Accuracy = %.1f %% \n',accuracy*100);
With Train/Test dataset provided: Accuracy = 100.0 %
```


Test Functionality


classifier.test(TrainDataBase)


Test 2: There are 20.48 ms of speech in 256 samples.

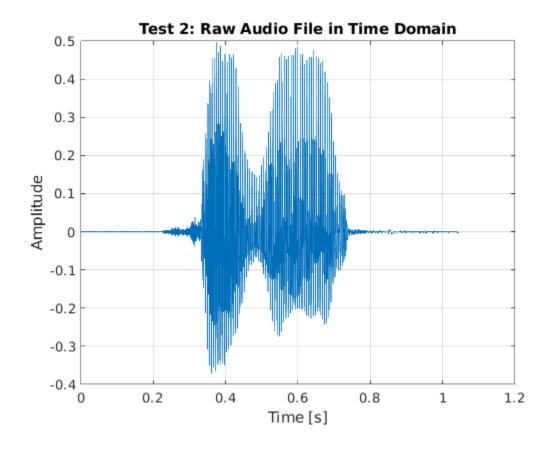


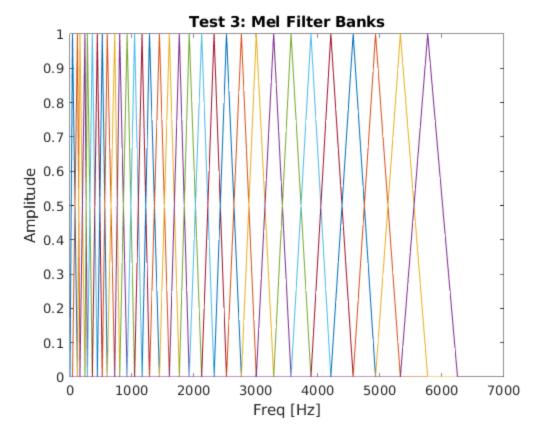

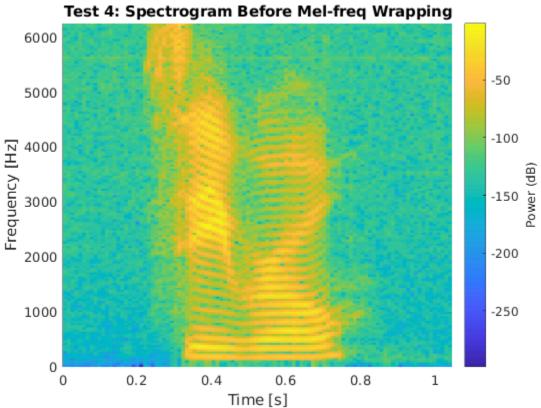

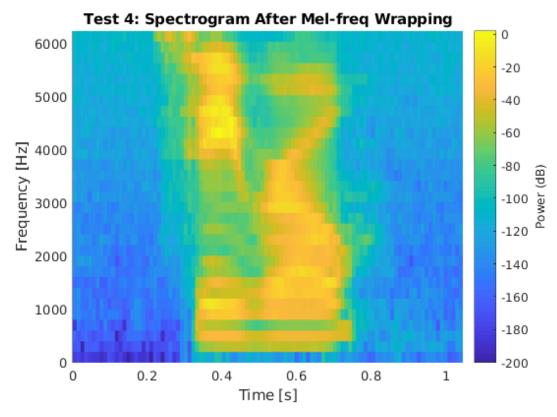

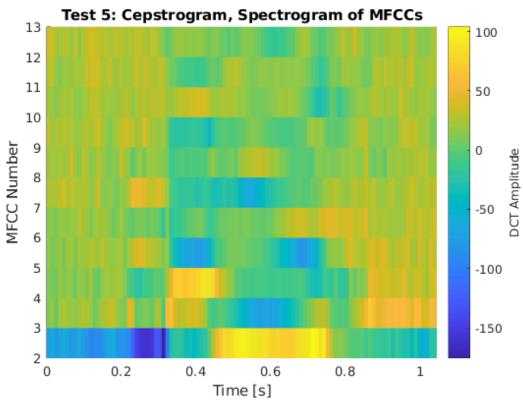

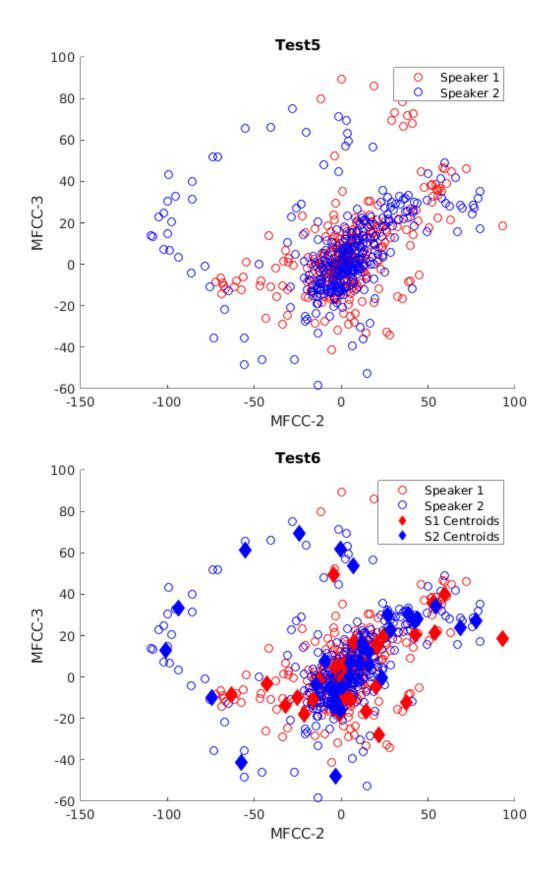

Test with New Voices (roommates)

```
roommatesDir = fullfile('Data','Roommates');
[roomTest,roomTrain] = loadRoommatesData(roommatesDir);
roomClassifier = speakerClassifier();
[~] = roomClassifier.train(roomTrain);
[roomMatch,err1] = roomClassifier.classify(roomTest);
% Compute error statistics
accuracy = mean([1:4]'==cell2mat(roomMatch));
fprintf('With roommate dataset: ');
fprintf('Accuracy = %.1f %% \n',accuracy*100);
With roommate dataset: Accuracy = 100.0 %
```

Test Rejection Ability

```
TestDir = fullfile('Data', 'Test_Data');
TestDataBase = cell(1,8);
for i = 1:8
    filename = 's' + string(i) + '.wav';
    [audio,Fs] = audioread(fullfile(TestDir,filename));
    TestDataBase{i} = {audio,Fs};
end
numClusters = 8;
numFilters = 32;
numCoeffs = 11;
rejector = speakerClassifier(numClusters,numFilters,numCoeffs);
[~] = rejector.train(TestDataBase);
[rejectMatch,err2] = rejector.classify(TrainDataBase,40);
% Compute error statistics
expected = {1;2;3;4;5;6;7;8;"No match found";"No match found";"No
match found"};
correct = 0;
for i = 1:length(rejectMatch)
        correct = correct + (expected{i} == rejectMatch{i});
    catch
    end
end
accuracy = correct/length(rejectMatch);
fprintf('With rejection: ');
fprintf('Accuracy = %.1f %% \n',accuracy*100);
With rejection: Accuracy = 100.0 %
```

Notch Filters to test Robustness of Model

```
correct = 0;
for i = 1:100
```

```
r = rand;
  f1 = r-0.005;
  f2 = r+0.005;
  if (f1 < 0)
       f1 = 0.0001;
  end
   if (f2 > 1)
      f2 = 0.9999;
  end
  f = [f1 f2];
  [b,a] = butter(6,f,'stop');
  %collect filtered test data
  TestDir = fullfile('Data', 'Test Data');
  FilteredDataBase = cell(1,8);
  TestCases = [(1:8)', randperm(8)'];
  for i = 1:8
       filename = 's' + string(TestCases(i,2)) + '.wav';
       [audio,Fs] = audioread(fullfile(TestDir,filename));
      audiof = filter(b,a,audio);
      FilteredDataBase{i} = {audiof,Fs};
  end
   [testMatch,err] = classifier.classify(FilteredDataBase);
   % Compute error statistics
   accuracy = mean(TestCases(:,2)==cell2mat(testMatch));
   if (accuracy == 1)
        correct = correct + 1;
   end
end
fprintf('Number of Correct results with Notch Filters: %d
\n',correct);
```

Number of Correct results with Notch Filters: 56

Published with MATLAB® R2020b