Research & Vehicle Technology
"Product Development"

Feature –
Customer Connectivity Settings Client

APIM Infotainment
Subsystem Part Specific Specification
(SPSS)

Version 1.5
UNCONTROLLED COPY IF PRINTED

Version Date: April 22, 2020

FORD CONFIDENTIAL

<u>Revision History</u>

Date	Version	Notes	
June 22, 2018	1.0	**Initial Release**	**OBSOLETE due to release of v 1.0.1**
June 27, 2018	1.0.1	**Corrected Initial Release**	**ASIMUKHI: THIS RELEASE CONTAINS CORRECTIONS AND MAKES THE RELEASE V1.0 OBSOLETE.**
	CCOIv2-FUN-REQ-318490/C-Change entity setting		kfent1: added paragraph for sequence diagrams which got lost in last release.
	CCOIv2-REQ-313180/B-Default on Lifecycle mode change		bhamach3: Correction - default states are defined in entity Rules instead of configuration
	CCOIv2-REQ-296372/B-Diagnostics Parameters for Distributed State Machine		bhamach3: config parameters/DTCs from previous feature bundles removed
	CCOIv2-TBL-504779/B-Diagnostics Parameters		bhamach3: config parameters from previous feature bundles removed
June 22, 2018	1.1	**Updated Release**	
	IIR-REQ-313614/B-Customer Connectivity Settings API		kfent1: removed MD-REQ-313617
	MD-REQ-313623/B-EntityStatus		kfent1: new Data Element API
	MD-REQ-328277/A-MetaSettings		kfent1: new Data Element API
	MD-REQ-328083/A-AuthorizationStatus		kfent1: new MD for Authorization Status. See new Section CCOIv2-FUN-REQ-324870/A-Authorization for Info.
	CCOIv2-REQ-315470/B-Connectivity Customer Settings Menu		bhamach3: REQ-315476 removed
	CCOIv2-REQ-315478/B-Entry into Settings Menu		kfent1: new REQ
	CCOIv2-REQ-315481/B-Modem Activation and Authorization		bhamach3: REQ-318818 descoped
	CCOIv2-REQ-318209/B-Modem Activation		bhamach3: clarification - any meta entity default opt-in state configurable
	CCOIv2-REQ-318817/B-Modem Activation - not enabled per default		bhamach3: clarification - pop-up effect removed - defined in policy files
	CCOIv2-REQ-318211/B-User Authorization		bhamach3: clarification - authorization dependencies removed - defined in policy files
	STR-506065/C-Functional Definition		kfent1: added CCOIv2-FUN-REQ-324120/A-CCSManager synchronization
	CCOIv2-FUN-REQ-324120/A-CCSManager synchronization		kfent1: new FUN CCOIv2-FUN-REQ-324120/A-CCSManager synchronization
	CCOIv2-REQ-324471/A-Synchronization States		kfent1: new Req
	CCOIv2-REQ-324472/A-Synchronized State		kfent1: new Req
	CCOIv2-REQ-324473/A-Synchronizing State		kfent1: new Req
	CCOIv2-REQ-328714/A-Error State		kfent1: new Req
	CCOIv2-REQ-328715/A-Readability of Synchronization State		kfent1: new Req
	CCOIv2-STM-REQ-324474/A-CCS Manager StateMachine		kfent1: new Req
	CCOIv2-FUN-REQ-324870/A-Authorization		bhamach3: Authorization section added
	CCOIv2-UC-REQ-296268/C-Avenue B full authorization		bhamach3: clarification - authorizaton depends on authorization FTCP command
	CCOIv2-UC-REQ-325945/A-De-authorization via Reset		bhamach3: new authorization use case

CCOlv2-UC-REQ-326207/A-backend driven authorization	bhamach3: new authorization use case
CCOlv2-REQ-324934/A-Authorization status change triggers	kfent1: new REQ for Authorization
CCOlv2-REQ-324884/A-Authorization status change	kfent1: new REQ for Authorization
CCOlv2-REQ-325856/A-Authorization enabled	kfent1: new Req
CCOlv2-REQ-325858/A-Authorization disabled	kfent1: new Req
CCOlv2-REQ-328716/A-Publish Authorization State	bhamach3: new requirement
CCOlv2-SD-REQ-325943/A-Receiving Authorization change	kfent1: new authorization SD (seperated out of the Avenue B prompt SD)c
CCOlv2-FUN-REQ-318485/B-User Prompt and Modem activation	kfent1: added "Sequence Diagrams" paragraph, added REQ-321293, REQ-321294, REQ-321295
504763/B-Use Cases	bhamach3: Requirement REQ-313034 removed
CCOlv2-UC-REQ-296268/C-Avenue B full authorization	bhamach3: clarification - authorizaton depends on authorization FTCP command
556167/B-Requirements	bhamach3: Requirement REQ-296291 removed.
CCOlv2-REQ-313015/B-User Prompt Triggers	bhamach3: Acknowledgment prompt item removed
CCOlv2-REQ-296273/B-Upload of UserPrompt_Rsp	bhamach3: Clarification of configurable expiration
CCOlv2-REQ-318318/B-Retries of OnBoard triggered UserPrompt_Rq	bhamach3: clarification added
CCOlv2-REQ-318586/B-No FTCP alert on expiration of OnBoardPolicyServer triggered prompt	bhamach3: Rephrased only
CCOlv2-REQ-296274/B-Retry Persistence of User Prompt	kfent1: new Req
CCOlv2-REQ-296275/B-Effect of Master Reset on pending prompt requests	bhamach3: reset scenarios clarified
CCOlv2-REQ-306742/B-Triggering Avenue A prompt	bhamach3: Conditions for Ave A clarified
CCOlv2-REQ-318320/B-UserPrompt_Rq Handling promptType 0x01	bhamach3: HMI reference corrected
CCOlv2-REQ-318322/B-UserPrompt_Rq Handling promptType 0x03	bhamach3: HMI reference updated
CCOlv2-REQ-296289/C-initialPrompt UserPrompt_Rsp	kfent1: new Req
CCOlv2-REQ-296292/C-Effects of accepting a UserPrompt	bhamach3: Clarification - Requirement reference added.
CCOlv2-REQ-296290/C-Queue Prompts to be Shown	bhamach3: Clarified - synchronization state dependency removed
CCOlv2-SD-REQ-321293/A-Offboard triggerd User Prompt	kfent1: new SD
CCOlv2-SD-REQ-321294/A-Avenue A partial activation	kfent1: new SD
CCOlv2-SD-REQ-321295/A-Avenue B full authorization	kfent1: updated diagram to show split authorization and Avenue B prompt
CCOlv2-FUN-REQ-317862/B-Error and local update prompt handling	bhamach3: Clarification - Client reference removed in req. name
555154/B-Requirements	REQ-318325 removed
CCOlv2-REQ-317863/B-Error Pop-Up "Feature Unavailable"	kfent1: updated Req

CCOlv2-REQ-317866/B-Local Update Pop-Up	bhamach3: Clarification - Synchronization state clarified
CCOlv2-REQ-317868/B-General Pop-Up Priority	bhamach3: Acknowledgment reference removed
CCOlv2-UC-REQ-318886/B-CCSManager triggers OffBoardSynchronization	kfent1: aligned naming to meet CCSManager
CCOlv2-REQ-296327/B-Maintenance of LastKnownGood Data	bhamach3: Clarification - requirement reference corrected
CCOlv2-CLD-REQ-296336/B-ServerOffBoardSyncHandling	kfent1: removed REQ-296360; 296358; 296359
CCOlv2-STM-REQ-296345/B-FTCP Query Function	kfent1: removed state transition
CCOlv2-REQ-296347/B-OffBoard Synchronization FTCP Periodic Query Inhibition During Ignition Cycle	bhamach3: REQ reference updated
CCOlv2-REQ-296348/B-OffBoard Synchronization FTCP Query Retry Configurable Interval	bhamach3: REQ reference updated
CCOlv2-REQ-296349/B-OffBoard Synchronization FTCP Query Trigger Configurable Timeout	bhamach3: REQ reference updated
CCOlv2-REQ-296338/B-OffBoard Synchronization FTCP Update	bhamach3: entityRules reference removed; REQ-318487 removed
CCOlv2-REQ-318484/B-entity settings check for completeness	bhamach3: entityRules reference removed
CCOlv2-REQ-296356/B-Check consentSequenceId for Updates via FTCP	bhamach3: Clarification - check in commands and query responses
CCOlv2-REQ-296357/B-Update OnBoard consentSequenceId for Updates via FTCP	bhamach3: Clarification - Requirement reference updated.
492446/B-Sequence Diagrams	kfent1: added REQ-321883, REQ-321884
CCOlv2-SD-REQ-321883/A-OffBoardPolicyClient triggers OffBoardSynchronization	kfent1: new SD
CCOlv2-SD-REQ-321884/A-CCSManager triggers OffBoardSynchronization	kfent1: new SD
CCOlv2-FUN-REQ-318490/C-Change entity setting	kfent1: added paragraph for sequence diagrams which got lost in last release.
556170/B-Requirements	bhamach3: REQ-328368 added, REQ-313180 removed
CCOlv2-REQ-296401/B-ConsentSequenceId and Provisioning	kfent1: updated REQ
CCOlv2-REQ-313179/B-Default Opt-in entity values	bhamach3: Clarification of opt-in parameter, REQ-318334 removed
CCOlv2-REQ-318338/B-Default on Reset	bhamach3: Clarification of Reset scenarios
CCOlv2-REQ-318374/B-Default on Lifecycle Mode change	kfent1: Clarification of Default Lifecycle
CCOlv2-REQ-318335/B-Region dependent default values	bhamache3: entityRules dependency removed
CCOlv2-REQ-328368/A-Subscription and Policy entity values	kfent1: new REQ
CCOlv2-REQ-296415/B-Effects of Reset	kfent1: updated Effects
CCOlv2-REQ-296879/B-Entity toggle switch changed to "on"	bhamach3: Clarification of references
CCOlv2-REQ-296880/B-Entity toggle switch changed to "off"	bhamach3: Clarification of references

CCOlv2-REQ-315469/B-Entity States Update on settings change	bhamach3: clarification - data is not sent but updated for API
492618/B-Sequence Diagrams	kfent1: added sequence diagram REQ-321292
CCOlv2-SD-REQ-321292/A-Change entity setting by User	kfent1: new SD
CCOlv2-FUN-REQ-296186/B-Policy Enforcement	bhamach3: structure revision
504785/B-Static View	bhamach3: output policy enforcer reference removed.
CCOlv2-CLD-REQ-296382/B-CCSInputPolicyEnforcer	bhamach3: reference of entityRules removed.
504600/B-Use Cases	bhamach3: requirement structure update
CCOlv2-UC-REQ-296189/B-Enforce policies	bhamach3: WIR interface clarified, ign status reference removed, output policy enforcer reference removed, FCI policy enforcement UC removed, acknowledgment UC removed
CCOlv2-UC-REQ-328038/A-Feature Input PolicyEnforcement	bhamach3: requirement added
CCOlv2-UC-REQ-313323/B-Meta Input PolicyEnforcement	bhamach3: exceptions added
504786/B-Requirements	bhamach3: Exception for unprovisioned state added, feature categories removed, enforcement required for any feature
CCOlv2-REQ-326672/A-Data access control	kfent1: new Req
CCOlv2-REQ-326670/A-Meta entity enforcement	bhamach3: enforcement details added
CCOlv2-REQ-326671/A-Feature entity input enforcement	bhamach3: enforcement details added
CCOlv2-REQ-326826/A-Data categorization	bhamach3: clarification of service assignment to entities
CCOlv2-REQ-312332/B-Policy Enforcement Components	bhamach3: requirement rephrased for general use on input and output policy enforcer
CCOlv2-REQ-296383/B-Operation of PolicyEnforcer	bhamach3: requirement rephrased for general use on input and output policy enforcer
CCOlv2-REQ-296384/B-Start Up Order of PolicyEnforcer	bhamach3: output policyenforcer reference removed
CCOlv2-REQ-312335/B-Policy Enforcement disabled in Theft Mode	bhamach3: Requirement reference corrected
CCOlv2-REQ-324869/A-Policy Enforcement disabled in un-provisioned state	bhamach3: New requirement
CCOlv2-REQ-328100/A-Validation of Policy Enforcement	kfent1: new Req
CCOlv2-REQ-296876/B-Visual Feedback based on Settings and Policy Table Extension	bhamach3: switch layout definition changed
CCOlv2-UC-REQ-296260/B-Configuration Triggered Policy Table Selection	bhamach3: requirement reference added
CCOlv2-REQ-311522/B-Default Policy Tables	bhamach3: requirement reference added, entityRules reference removed
CCOlv2-REQ-296313/B-Meta Data	kfent1: no change in req. Revision created accidentally. Could not be deleted
CCOlv2-TBL-504768/B-Meta Data Description Table	bhamach3: entityRules reference removed
CCOlv2-REQ-296314/B-Policy Table Meta Data	bhamach3: Clarification - Requirement reference added.
CCOlv2-REQ-296318/B-Meta Data Generation	kfent1: added 324478 for FNV2
CCOlv2-REQ-296319/B-Platform Version	bhamach3: Clarification - Requirement reference added, entityRules reference removed

CCOlv2-REQ-296320/B-Major Version	bhamach3: Clarification - Requirement reference added.
CCOlv2-REQ-296321/B-Minor Version	bhamach3: Clarification - Requirement reference added.
CCOlv2-REQ-324478/A-Behaviour on FNV2 architecture	bhamach3: Clarification added for FNV2 meta data generation.
CCOlv2-REQ-296316/B-Active Policy Table Set	bhamach3: entityRules reference removed
CCOlv2-REQ-312330/B-Policy Table Query	bhamach3: Clarification - Requirement reference added.
CCOlv2-REQ-296317/B-Missing Policy Table	bhamach3: Clarification - Requirement reference added.
CCOlv2-FUN-REQ-292436/B-Policy Table Definition	bhamach3: Policy Table parameters updated
CCOlv2-REQ-296414/B-Policy Tables	bhamach3: entityRules reference removed, new parameters are part of the PTE file; Feature Manifest logic added
CCOlv2-REQ-328986/A-Policy File compression	bhamach3: compression split from general Policy Table requirement
CCOlv2-REQ-328987/A-Merge Policy Table Extension and Feature Manifest	bhamach3: new requirement
CCOlv2-REQ-296305/B-Configuration and Preload	bhamach3: entityRules reference removed
REQ-328988/A-Manual Policy Upload	kfent1: new Req
CCOlv2-REQ-296368/B-User Friendly Messages variables	bhamach3: references added
584657/A-General explanations	kfent1: new REQ
CCOlv2-REQ-318822/B-unique identifier	kfent1: new REQ
CCOlv2-REQ-318823/B-regions	kfent1: new REQ
CCOlv2-REQ-328989/A-entityBitSetting	kfent1: new REQ
CCOlv2-REQ-329000/A-entity bit states	kfent1: new REQ
CCOlv2-REQ-329002/A-action	kfent1: new REQ
CCOlv2-REQ-329003/A-header (feature manifest)	kfent1: new REQ
584671/A-CCSEntity Definitions	kfent1: new REQ
CCOlv2-REQ-329004/A-DefaultEntitySettingPolicies	kfent1: new REQ
CCOlv2-REQ-329005/A-DefaultEntityLifecycleModeSettings	kfent1: new REQ
CCOlv2-REQ-329006/A-Default settings trigger dependency logic	kfent1: new REQ
CCOlv2-REQ-329007/A-dependencies	kfent1: new REQ
584672/A-CCSFeaturePolicies	kfent1: new REQ
CCOlv2-REQ-329017/A-infoText_subscribed_locked	kfent1: new REQ
CCOlv2-REQ-329018/A-infoText_unsubscribed_unlocked	kfnet1: new REQ
CCOlv2-REQ-328968/A-menuConsentPrompt	kfent1: new REQ
CCOlv2-REQ-328971/A-Special confirmation prompts for Vehicle Connectivity Entity	kfent1: added REQ-Section for Vehicle Connectivity off transitions
CCOlv2-REQ-328972/A-confirmation_off_plusIVSU	kfent1: transferred functional logic from HMI Specification to SPSS REQ supporting CR688
CCOlv2-REQ-328973/A-confirmation_off_plusLBI	kfent1: New REQ supporting CR668 PAAK/LBI
CCOlv2-REQ-328974/A-confirmation_off_plusLBI_IVSU	kfent1: new REQ supporting LBI and IVSU at the same time
CCOlv2-REQ-329020/A-information	kfent1: new REQ
CCOlv2-REQ-329133/A-textBody	kfent1: new REQ
CCOlv2-REQ-329135/A-pop-up headers (CFM)	kfent1: new REQ

	CCOI-REQ-303279/B- User identification via paired phone for data sharing reminder Pop-Up	bhamach3: clarification added
	CCOIv2-UC- REQ-312051/B- Theft Mode Activation	kfent1: updated UC
	CCOIv2-REQ-312152/B- Theft Mode Activation	bhamach3: Clarification of theft mode functionality
	CCOIv2-REQ-312150/B- Theft Mode De-Activation	bhamach3: Clarification of re-activated policy enforcer functionality
	CCOIv2-REQ-313028/B- Theft Mode value missing	bhamach3: Clarification - as output policy enforcer descoped, no backend communication controlled
	UC-REQ-306740/B- Network Disconnect	bhamach3: config parameter removed
	UC-REQ-312154/B- Network Re-Connect	bhamach3: config parameter removed
	531086/B-Requirements	bhamach3: REQ-312183 (config parameter) removed
	REQ-312693/B- Reset keeps Network Disconnect	kfent1: updated REQ
	REQ-312694/B- Reset enters Network Disconnect	bhamach3: additional communication required, if backend driven pop-ups pending
	504778/B-Diagnostics Requirements	bhamach3: Acknowledgment parameter (REQ-317029) removed
	CCOIv2-TBL-504779/C- Diagnostics Parameters	bhamach3: synchronization state added
	CCOIv2-REQ-296376/B- Diagnostics Parameters for Entity Settings	bhamach3: Clarification - cycling read-out details added, synchronization logic after writing DID removed, as DID is only meant for read-out.
	CCOIv2-TBL-504780/B-Diagnostics Parameters	bhamach3: Parameter Table revised
	CCOIv2-TBL-504782/B- Diagnostic Parameters	bhamach3: removed default parameter, as defined per diagnostic specification
	CCOIv2-REQ-296381/B- Diagnostics Parameters for User Prompt Broker	bhamach3: Clarification - cycling read-out details added
	CCOIv2-TBL-504783/B- Diagnostics Parameters	bhamach3: Clarification - parameter names updated per diagnostic spec
	STR-506066/B- Appendix: Reference Documents	bhamach3: document references updated

January 31, 2019	1.2	Updated Release	
	CCOI-TBL-331447/D-Glossary	bhamach3: Clarification - Policy Enforcement / Blacklist	
	CCOI-TBL-331448/E-Abbreviations	bhamach3: SCF added, FM (Feature Manifest) removed	
	MD-REQ-313623/C-EntityStatus	bhamach3: parameter name correction kfent1: removed MetaSettingsPerEntity	
	CCOIv2-REQ-324473/B-Synchronizing State	kfent1;: removed "active" from "active Policy Table"	
	CCOIv2-FUN-REQ-324870/B-Authorization	kfent1: changed wording and removed Anonymization	
	CCOIv2-UC-REQ-296268/D-Avenue B full authorization	removed pre condition of unauthorized vehicle	
	CCOIv2-UC-REQ-325945/B-De-authorization	kfent1: made generic for deauthorization	
	CCOIv2-UC-REQ-296268/D-Avenue B full authorization	removed pre condition of unauthorized vehicle	
	CCOIv2-REQ-296272/B-UserPrompt_Rq correlationID	kfent1: added clarification of correlation ID in UserPrompt_Rsp	
	CCOIv2-REQ-306742/C-Triggering Avenue A prompt	bhamach3: Clarification for Avenue A triggers added	
	CCOIv2-SD-REQ-321293/B-Offboard triggerd User Prompt	kfent1: updated GetEntitySettingsAndBlacklist	
	CCOIv2-SD-REQ-321294/B-Avenue A partial activation	kfent1: updated GetEntitySettingsAndBlacklist	
	CCOIv2-SD-REQ-321295/B-Avenue B full authorization	kfent1: updated GetEntitySettingsAndBlacklist, made CCSUpdateAlert optional since it is not 100% sure that a entity changes (Fleet scenarios).	
	CCOIv2-FUN-REQ-291418/B-Synchronize OnBoard and OffBoard System	kfent1: removed CCOIv2-REQ-296301/A-Check of Meta Data when executing FTCP Command	

CCOIv2-UC-REQ-318886/C-CCSManager triggers OffBoardSynchronization	kfent1: remved change of active Policy table in Scenario Description
504766/B-Requirements	
CCOIv2-REQ-296296/B-Check of Meta Data	removed CCOIv2-REQ-296301/A-Check of Meta Data when executing FTCP Command
CCOIv2-CLD-REQ-296324/B-ServerData	bhamach3: SCF added as part of ServerData
CCOIv2-REQ-296343/B-FTCP Periodic Query Policy Governed Function	kfent1: removed CCOIv2-REQ-296352/A-OffBoard Synchronization FTCP Query Trigger Upon New Policy Table Selection
CCOIv2-STM-REQ-296345/C-FTCP Query Function	kfent1: removed the Query OFF path since it is not reachable.
CCOIv2-REQ-296338/C-OffBoard Synchronization FTCP Update	bhamach3: SCF reference added
CCOIv2-SD-REQ-321883/B-OffBoardPolicyClient triggers OffBoardSynchronization	kfent1: removed "change entities per Dependencies"
CCOIv2-SD-REQ-321884/B-CCSManager triggers OffBoardSynchronization	kfent1: removed "change entities per Dependencies"
CCOIv2-UC-REQ-291421/B-Change entity setting by User	kfent1: removed "in CCS menu" since change could be done somewhere else (FordPass , Confirming a PopUp etc.)
CCOIv2-REQ-296398/B-Assigning consentSequenceId and consentTimestamp	bhamach3: Clarification - change of lifecycle mode added as driver for consentsequenceID increment driver
CCOIv2-REQ-313179/C-Default Opt-in entity values	bhamach3: Provisioning as trigger for default settings added
CCOIv2-REQ-318338/C-Default UAllow on Reset	bhamach3: Clarification: Only bUAllow default values changed on reset
CCOIv2-REQ-342774/A-Default on Provisioned state	bhamach3: new requirement
CCOIv2-REQ-296415/C-Effects of Reset	bhamach3: Clarification of default values and settings broadcast
CCOIv2-REQ-296879/C-Entity toggle switch changed to "on"	bhamach3: Clarification of PTE dependencies
CCOIv2-REQ-296880/C-Entity toggle switch changed to "off"	bhamach3: PTE dependencies clarification
CCOIv2-SD-REQ-321292/B-Change entity setting by User	kfent1: update GetEntitySettingsAndBlacklist
CCOIv2-UC-REQ-296189/C-Enforce policies	bhamach3: blacklist reference added
CCOIv2-UC-REQ-328038/B-Feature Input PolicyEnforcement	bhamach3: blacklist/SCF reference added
CCOIv2-UC-REQ-313323/C-Meta Input PolicyEnforcement	kfent1: aligned wording with CCOIv2-UC-REQ-328038/B-Feature Input PolicyEnforcement
504786/C-Requirements	bhamach3: REQ-326670 removed - combined with REQ-326671 as generic policy enforcement logic kfent1: added CCOIv2-REQ-343058/A-Policy Enforcer has to Acknowledge Blacklist
CCOIv2-REQ-326670/B-blacklist generation	bhamach3: requirement name revised, blacklist logic added
CCOIv2-REQ-326671/B-input policy enforcement per blacklist	bhamach3: requirement name revised, policy enforcer logic changed
CCOIv2-REQ-324869/B-Policy Enforcement disabled in un-provisioned state	bhamach3: Reference to Provisioning API
CCOIv2-REQ-328100/B-Validation of Policy Enforcement	kfnet1: removed unnecessary Validation items
CCOIv2-REQ-343058/A-Policy Enforcer has to Acknowledge Blacklist	kfent1: new requirement
CCOIv2-REQ-311523/B-Policy Table Meta Data	kfent1: renamed to Policy Table Meta Data, removed 543897/A-Use Cases; removed: CCOIv2-REQ-312329/A-Policy Table Selection
543898/B-Requirements	
CCOIv2-REQ-311522/C-Default Policy Tables	bhamach3: SCF reference added; kfent1: removed language dependency
CCOIv2-REQ-296313/C-Meta Data	bhamach3: REVISION NOT REQUIRED
CCOIv2-TBL-504768/C-Meta Data Description Table	bhamach3: SCF reference added. Hash calculation clarified
CCOIv2-REQ-296319/C-Platform Version	bhamach3: SCF reference added
496258/C-Requirements	bhamach3: REQ-328987 removed (Feature Manifest logic descoped)

	CCOIv2-REQ-296414/C-Policy Tables	bhamach3: SCF description added
	CCOIv2-REQ-296305/C-Configuration and Preload	bhamach3: SCF reference added
	REQ-328988/B-Manual Policy Upload	bhamach3: SCF reference added, Feature Manifest removed
	584657/B-General explanations	bhamach3: Feature Manifest reference removed
	584671/B-CCSEntityDefinitions	bhamach3: REQ-329006 removed - any default settings to be taken from PTE
	CCOIv2-REQ-329007/B-dependencies	bhamach3: PTE dependency clairification
	CCOIv2-REQ-328949/B-messageCode (User Friendly Messages)	kfent1: clarified that screenID is used to match the nessage code
	CCOIv2-REQ-329018/B-infoText_unsubscribed_locked	bhamach3: correction
	617509/A-Service Config File content definition	bhamach3: Content definition of new Service Config File
	CCOIv2-REQ-342767/A-CCSEntity	bhamach3: new requirement
	CCOIv2-REQ-342768/A-Signal	bhamach3: new requirement
	CCOIv2-REQ-342769/A-Primitive	bhamach3: new requirement
	CCOIv2-REQ-342770/A-Application	bhamach3: new requirement
	CCOIv2-REQ-342771/A-CCSBlacklist	bhamach3: new requirement
	CCOIv2-UC-REQ-296180/B-show data sharing reminder	kfent1: wording changed from "him" to "the user"
	CCOIv2-UC-REQ-296181/B-show data sharing reminder Pop-Up	kfent1: removed "BT and USB" since phones can be paired by different means
	CCOI-REQ-303277/B-Data/Location sharing reminder Pop-Up	kfent1: clarified that data sharing Pop-Up shall not be shown again when any Pop-Up was shown before to the currently paired phone
	CCOIv2-REQ-296376/C-Diagnostics Parameters for Entity Settings	bhamach3: clarification - instead of DET or dealer tools, read out via internal developer tools will be sufficient
	CCOIv2-REQ-296379/B-Diagnostic Parameters for Active Policy Table	kfent1: removed CCOIv2-REQ-296380/A-DTC due to missing policy table
	CCOIv2-REQ-296381/C-Diagnostics Parameters for User Prompt Broker	bhamach3: clarification - instead of DET or dealer tools, read out via internal developer tools will be sufficient
	STR-506066/C-Appendix: Reference Documents	kfent1: SCF file reference
September 5, 2019	1.3	Updated Release
	CCOIv2-FRD-REQ-362363/A-Customer Connectivity Settings Client APIM SPSS	bhamach3: Content revised for Release 1.3, Manager split in Server and Client SPSS, Sections "General Requirements" and "Diagnostic Requirements" removed
	CCOIv2-TBL-683964/A-Glossary	bhamach3: Revised from CCOI to CCOIv2, "Active Policy Table" added; mkahlen: added new terms: factory, armr admin, CCSOffBoardPolicyClient, CCSOnboardPolicyClient, CCSOnBoardPolicyModemClient, CCSOnBoardPolicyServer
	CCOIv2-TBL-683966/A-Abbreviations	bhamach3: Revised from CCOI to CCOIv2, SCF added, FM (Feature Manifest) removed; mkahlen: added new abbreviations: GUI, SOA, FCI, FOTA, MMOTA
	CCOIv2-STR-685360/A-Architectural Design	mkahlen: replaced REQ-313614 API requirement with SOA interface
	685846/A-Boundary Diagram	bhamach3: boundary diagram added for system overview
	CCOIv2-BD-REQ-362932/A-Customer Connectivity Settings	bhamach3: boundary giagram added for system overview
	CCOIv2-685361/A-Interface Requirements	mkahlen: new paragraph for interfaces
	CCOIv2-685364/A-SOA Interface	mkahlen: new paragraph for soa interface
	CCOIv2-REQ-362874/A-ECG SOA Proto File	mkahlen: new requirement for the ecg soa proto file messages
	CCOIv2-REQ-362875/A-SYNC SOA Proto File	mkahlen: new requirement for the sync soa proto file messages
	CCOIv2-REQ-362876/A-FNV SOA Proto File	mkahlen: new requirement for the fnv soa proto file messages
	STR-683200/A-Functional Definition	bhamach3: Chapters removed: CCOIv2-FUN-REQ-324120, CCOIv2-FUN-REQ-291418; Generic Policy Enforcer section replaced by Client specific Policy Enforcer section

CCOIv2-FUN-REQ-362533/A-User Prompt and Modem activation (Client)	bhamach3: User Prompt logic split for CCS Server and Client
504763/C-Use Cases	mkahlen: Combined UC-REQ-296266, UC-REQ-313014, UC-REQ-317846, UC-REQ-296267, UC-REQ-296268, UC-REQ-313033 in a single use case UC-REQ-355216.
CCOIv2-UC-REQ-355216/A-Prompt User to Get Driver's Consent	mkahlen: initial release
683549/A-Requirements	bhamach3: Requirement REQ-296291 removed.
CCOIv2-REQ-362705/A-Fail User Prompt when screenID or promptType Unknown	mkahlen: new requirement that the client shold fail requests with unkown message codes or text
CCOIv2-REQ-296287/B-User Prompt Handling as per PTE and UFM	mkahlen: included error scenario handling before showing user prompt on client
CCOIv2-REQ-318320/C-User Prompt Handling promptType Initial Prompt	mkahlen: included the specific message parameters
CCOIv2-REQ-318321/B-User Prompt Handling promptType Error	mkahlen: included the specific message parameters
CCOIv2-REQ-318322/C-User Prompt Handling promptType Information	bhamach3: HMI reference corrected; mkahlen: included the specific message parameters
CCOIv2-REQ-362706/A-Events Impacting User Prompts	mkahlen: new requirement paragraph
CCOIv2-REQ-362707/A-Effects of Driver Selecting Yes	mkahlen: new requiremnet describing what the client should do if a user clicks yes on a prompt
CCOIv2-REQ-362708/A-Effects of Driver Selecting No	mkahlen: new requirement describing what the client should do if the user selects no on a user prompt
CCOIv2-REQ-362709/A-Effects of Driver Selecting Ask Me Later	mkahlen: new requirement describing what the client should do if the driver clicks ask me later on a user prompt
CCOIv2-REQ-362710/A-Effects of Driver Selecting Close	mkahlen: new requirement describing what the client should do if the driver clicks close on a user prompt
CCOIv2-REQ-362711/A-Effects of Driver turning Ignition Off without Making Choice	mkahlen: new requirement describing what the client should do if the driver turns ignition off without making a choice
CCOIv2-REQ-362712/A-Effect of Master Reset	mkahlen: new requirement describing client beheavior for master and brand reset connect.
CCOIv2-REQ-296283/B-Effect of PTE or UFM Update	mkalen: clarified that the client only needs to close the user prompt in case of a new pte or ufm file. The server will further process the command.
CCOIv2-REQ-362714/A-Effect of Data Storage Error	mkahlen: separated this requirement about data storage error behavior out from REQ-296283
CCOIv2-REQ-362715/A-Performance Requirements	mkahlen: new requirement paragraph
CCOIv2-REQ-362716/A-Time to Display User Prompts	mkahlen: new performance requiremnet how long it should take to display a popup after receiving the trigger condition from the server
CCOIv2-REQ-362718/A-Time to Display User Prompts: Happy Path	mkahlen: new performance requirement for the happy path of REQ-362716
CCOIv2-REQ-362719/A-Time to Display User Prompts: Higher Priority Pop-ups Present	mkahlen: new performance requirement when higher priority pop-ups are present of REQ-362716
CCOIv2-REQ-362717/A-Maximum Length of Variable Text	mkahlen: new performance requirement about the minimum text length that the client should be able to display as variable text
562210/B-Sequence Diagrams	mkahlen: removed SD-REQ-321293, SD-REQ-321294, SD-REQ-321295 and replaced them with SD-REQ-362645, SD-REQ-362646, SD-REQ-362647, and SD-REQ-362648. Instead of focusing on instances we focus on the flow.
CCOIv2-SD-REQ-362645/A-Prompt Server To get Drivers Consent	mkahlen: new SD to describe the triggers for user prompts
CCOIv2-SD-REQ-362646/A-Prompt Client To get Drivers Consent	mkahlen: new SD to describe the retry strategy to show user prompts
CCOIv2-SD-REQ-362647/A-Initial Prompt	mkahlen: new SD to describe an initial prompt flow
CCOIv2-SD-REQ-362648/A-Information and Error Prompt	mkahlen: new SD to describe an information/error prompt flow
CCOIv2-FUN-REQ-317862/C-Error and local update prompt handling	mkahlen: added REQ-362597-HMI Lockout
555154/C-Requirements	mkahlen: Removed requirement REQ-317868. The requirement about pop-up priority is already covered by the HMI spec. Removed requirement REQ-317869. The requirement about closing pop-ups when a higher priority pop-up is shown is already covered by the HMI spec.

CCOIv2-REQ-317863/C-Error Pop-Up "Feature Unavailable"	mkahlen: Clarified that the actor to show Error Messages Pop-up 27 in the case of DataStorageError or UnrecoverableSnychronizationError is the CCSOnboardPolicyClient.
CCOIv2-REQ-317866/C-Local Update Pop-Up	mkahlen: Changed the trigger condition to display the local update pop-up.
CCOIv2-REQ-362636/A-Performance Requirements	mkahlen: new requirement paragraph
CCOIv2-REQ-362637/A-Deadline to Inform Server about Setting Changes	mkahlen: new requirement about how long it should take between changing a setting and informing the user
CCOIv2-REQ-355042/A-OnBoardSynchronization (Client)	bhamach3: initial release
CCOIv2-UC-REQ-357523/A-Turn ignition on	bhamach3: initial release
CCOIv2-UC-REQ-362912/A-Turn HMI System on	bhamach3: initial release
CCOIv2-UC-REQ-362282/A-Policy File received from OffBoardPolicyClient	bhamach3: initial release
CCOIv2-UC-REQ-357522/A-Revert to Default Policy File	bhamach3: initial release
CCOIv2-UC-REQ-357525/A-Software Update	bhamach3: initial release
CCOIv2-UC-REQ-362319/A-Setting Change while OnBoardSynchronization	bhamach3: initial release
CCOIv2-UC-REQ-362320/A-Subscription Change while OnBoardSynchronization	bhamach3: initial release
CCOIv2-UC-REQ-362321/A-Authorization Change while OnBoardSynchronization	bhamach3: initial release
CCOIv2-UC-REQ-362336/A-User/Authorization Prompt while OnBoardSynchronization	bhamach3: initial release
CCOIv2-REQ-354018/A-OnBoardHMISystemPolicyClient Synchronization State Transitions	bhamach3: initial release
CCOIv2-TBL-664710/A-State Transition Table	bhamach3: FB5 state transitions
CCOIv2-REQ-362524/A-Invalid to Waiting	bhamach3: initial release
CCOIv2-REQ-362525/A-Any to Invalid	bhamach3: initial release
CCOIv2-REQ-359108/A-Client Hash Check in State Synchronizing	bhamach3: initial release
CCOIv2-REQ-358309/A-Hash Value mismatch	bhamach3: initial release
CCOIv2-REQ-358466/A-Hash Value match	bhamach3: initial release
CCOIv2-REQ-359109/A-SynchronizationSessionRequest	bhamach3: initial release
CCOIv2-REQ-362526/A-Application of synchronized Policy Files	bhamach3: initial release
CCOIv2-ACT-REQ-362528/A-OnBoardSynchronization	bhamach3: initial release
CCOIv2-STM-REQ-358305/A-OnBoardSynchronization	bhamach3: initial release
CCOIv2-SD-REQ-358303/A-Power On Sequence	bhamach3: initial release
CCOIv2-SD-REQ-361331/A-SynchronizationNeeded	bhamach3: initial release
CCOIv2-SD-REQ-358304/A-Synchronization	bhamach3: initial release
CCOIv2-SD-REQ-361332/A-SynchronizationFailed	bhamach3: initial release
CCOIv2-FUN-REQ-362638/A-Update Entity Setting (Client)	mkahlen: renamed the section from change entity setting to update entity setting. The whole section was revised for the Client/Server split.
492616/B-Use Cases	mkahlen: replaced use cases to change entity settings (REQ-291421/B-Change entity setting by User; REQ-291529/A-Change entity setting per policy file) with more detailed use cases

CCOIv2-UCD-REQ-361932/A-Update Entity Settings	mkahlen: new use case diagram
CCOIv2-UC-REQ-355218/A-Change Consent Setting in Menu	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355186/A-Configure CCS Communication Data	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355202/A-Configure Entity bSAllow	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355203/A-Configure Entity bPAllow	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355208/A-Reset	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355201/A-Provisioning	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355204/A-Change Lifecycle Mode	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355206/A-ECG Swap	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355212/A-Restore bUAllow Entity Settings	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355214/A-Update SCF	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355205/A-Hard Reset	mkahlen: new use case for clarification
CCOIv2-UC-REQ-362905/A-Update Software	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355215/A-Re-connect Battery	mkahlen: new use case for clarification
CCOIv2-UC-REQ-355983/A-Update Settings Onboard	mkahlen: new use case for clarification
684020/A-Requirements	mkahlen: new requirement section for client on update entity settings due to server client split
CCOIv2-REQ-362811/A-Driver Changes a Setting in Menu	mkahlen: new requirement paragraph
CCOIv2-REQ-296879/D-Entity toggle switch changed to "on"	mkahlen: Updated the requirement so that not the client applies the entity setting for enabling but sends the request to change an entity setting to the server. Also removed a link to the dependencies as dependencies apply to all entity setting changes not just bUAllows.
CCOIv2-REQ-296880/D-Entity toggle switch changed to "off"	mkahlen: Updated the requirement so that not the client applies the entity setting for disabling but sends the request to change an entity setting to the server. Also removed a link to the dependencies as dependencies apply to all entity setting changes not just bUAllows.
CCOIv2-REQ-296881/B-Switching entites on/off no consent prompt required per PTE	mkahlen: Updated the requirement so that not the client applies the entity setting without user prompt but sends the request to change an entity setting to the server.
CCOIv2-REQ-362639/A-Client Sends Read Entity Setting Request on Start-up	mkahlen: new requirement that the client shall ready ccs settings on start up
CCOIv2-REQ-362640/A-Store Server Entity Settings on Client: Client Starts-up	mkahlen: new requriement for the client to store settings from a reads request response
CCOIv2-REQ-362641/A-Store Server Entity Settings on Client: Server updated A CCS Entity	mkahlen: new requirement, Inform Server about storing the latest setting update. All CCS clients should store the CCS settings locally to be able to answer setting read requests from applications on the client's module.
CCOIv2-REQ-362817/A-Inform Features about Entity Setting Changes	mkahlen: new requirement that elaborates on the CCS api to inform features about ccs settings
CCOIv2-REQ-362818/A-Provide Entity Settings Information on Request	mkahlen: new requirement that elaborates on the CCS api to inform features about ccs settings
492618/C-Sequence Diagrams	mkahlen: expanded seuqence diagrams with more details
CCOIv2-SD-REQ-362625/A-Provisioning	mkahlen: new SD illustrating the provisioning scenario
CCOIv2-SD-REQ-321292/C-Change Consent Setting in Menu	mkahlen: included more details about a user changing a setting
CCOIv2-SD-REQ-362624/A-bPAllow or bSAllow Configuration Change	mkahlen: new SD that shows the bSALlow and bPAllow configuration change impact on CCS
CCOIv2-SD-REQ-362626/A-ECG Swap	mkahlen: new SD illustrating the ECG swap scenario
CCOIv2-SD-REQ-362627/A-Update Settings Onboard	mkahlen: new SD to document how the server shall update the settings on change
CCOIv2-SD-REQ-362628/A-Distribute Entity Settings	mkahlen: new SD to document how the server informs onboard clients about setting changes

CCOIv2-FUN-REQ-362747/A-Policy Enforcement (Client)	bhamach3: initial release
CCOI-504600/C-Use Cases	bhamach3: reduced to one generic use case
CCOIv2-UC-REQ-296189/D-Enforce policies	bhamach3: Use Case revised to cover behavior on all policy enforcing modules
CCOIv2-684929/A-Requirements	bhamach3: section updated; mkahlen: the whole policy enforcement for SYNC is tracked in SYNC-41274
CCOIv2-REQ-362753/A-Connected Navigation	mkahlen: New requirement on the policy enforcement for navigation per SYNC-18616
REQ-362948/A-Connected Navigation - Restricted Data	mkahlen: new requirement for restricted data access for connected nav
CCOIv2-REQ-362754/A-Connected Voice (Nuance)	mkahlen: New requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362757/A-Connected Voice (Nuance) - Nuance Setting	mkahlen: New sub-requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362758/A-Connected Voice (Nuance) - Location Sharing Setting	mkahlen: New sub-requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362760/A-Connected Voice (Nuance) - Driving Data Setting	mkahlen: New sub-requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362761/A-Connected Voice (Nuance) - Vehicle Data Setting	mkahlen: New sub-requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362762/A-Connected Voice (Nuance) - Contact Upload Setting	mkahlen: New sub-requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362764/A-Connected Voice (Nuance) - Restricted Data	mkahlen: New sub-requirement on the policy enforcement for connected voice per SYNC-39955
CCOIv2-REQ-362765/A-Analytics	mkahlen: New requirement on the policy enforcement for analytics per ANLYT-3795
CCOIv2-REQ-362766/A-Diagnostics	mkahlen: New sub-requirement on the policy enforcement for analytics per ANLYT-3795
CCOIv2-REQ-362768/A-Vehicle Analytics	mkahlen: New sub-requirement on the policy enforcement for analytics per ANLYT-3795
CCOIv2-REQ-362770/A-Voice Recognition Feedback	mkahlen: New sub-requirement on the policy enforcement for analytics per ANLYT-3795
CCOIv2-REQ-362771/A-Media Analytics	mkahlen: New sub-requirement on the policy enforcement for analytics per ANLYT-3795
CCOIv2-REQ-362776/A-Sirius XM 360L	mkahlen: New requirement on the policy enforcement for Sirius XM per SYNC-58093
REQ-362949/A-Sirius XM 360L - Restricted Data	mkahlen: new requirement for restricted data access for sirius
CCOIv2-REQ-362777/A-Digital Owners Manual	mkahlen: clarification that digital owners manual can stream videos when connectivity is enabled
CCOIv2-REQ-362778/A-Rocket Setup	mkahlen: clarification that rocket set up is allowed to receive settings from offboard when connectivity is enabled
CCOIv2-REQ-362805/A-Mobile Phone Interface Not Affected by CCS Entity Settings	mkahlen: clarification that android auto, apple carplay, applink are not affected by ccs settings (they have their own settings)
CCOIv2-REQ-362779/A-Block All Connections for Not Listed Features	mkahlen: clarified that features not mentioned in this spss should not have access to a backend on SYNC
504597/B-Use Cases	bhamach3: requirement structure corrected
CCOIv2-UC-REQ-296183/B-show CCS settings menu	bhamach3: Synchronization state referenced
CCOIv2-UC-REQ-296184/B-check entity settings	bhamach3: Synchronization state referenced
CCOIv2-REQ-296192/B-Driver Restrictions SPSS dependencies	mkahlen: corrected typo
CCOIv2-FUN-REQ-362370/A-Policy Table Definition (Client)	bhamach3: Client section created
CCOIv2-UC-REQ-296178/B-parse Policy Files	bhamach3: dependency of ignition on removed, System split into Server and Client, new Policy File contents (EnttiyDefinitions, SCF) referenced
683202/A-Requirements	bhamach3: Client requirements split from Server
CCOIv2-REQ-296414/D-Policy Tables	mkahlen: replaced backend with offboardclient (to be more specific)

CCOIv2-REQ-362371/A-Persistent Storage and Hashing	bhamach3: Client Consistency Check defined
CCOIv2-REQ-362372/A-Failed Client Consistency Check	bhamach3: Client Consistency Check defined
CCOIv2-REQ-296368/C-User Friendly Messages variables	bhamach3: REQ references corrected; mkahlen: updated that the sText variables come from the Server message user prompt, not FTCP
CCOIv2-REQ-318822/C-unique identifier	bhamach3: PTE parameter changed from FNV2FID to FeatureCode; mkahlen: repalced backend with CCSOffBoardPolicyClient to be more specific.
CCOIv2-REQ-318823/C-regions	bhamach3: references updated
CCOIv2-REQ-329003/B-header	bhamach3: feature manifest logic descoped for J#1, instead using this requirement for general Policy File header information
584671/C-CCSEntityDefinitions	mkahlen: added new requirement in this section REQ-362720
CCOIv2-REQ-329004/B-DefaultEntitySettingPolicies	mkahlen: default settings no longer depend on conditions of other entity states
CCOIv2-REQ-329007/C-dependencies	mkahlen: Clarification: due dependencies only being applied if an entity setting settings are not changed due to a reset to default values or due to restoring values, this requirement had to be adjusted to include a reference to REQ-296883/A-Dependency on Policy Table Extension.
CCOIv2-REQ-362720/A-Dependency Execution	mkahlen: New requirement that documents how the code has implemented the execution of dependencies and which dependencies are executed first. If we need to add conflicting dependencies in the future, we are aware of which dependency takes precedence.
CCOIv2-REQ-328921/B-promptPolicies	mkahlen: updated the actor to apply prompt policies
CCOIv2-REQ-328925/B-userActions	mkahlen: updated this requirement for the client server split that user actions are interpreted depending on the clients response
CCOIv2-REQ-328939/B-iconRules	bhamach3: requirement text correct, to match revised strategy (icon reference in PTE instead of CFM)
584644/B-User Friendly Messages content definition	bhamach3: header requirement added
CCOIv2-REQ-362575/A-header	bhamach3: Policy File header information added
CCOIv2-REQ-328953/B-initalPrompt	mkahlen: added the mapping between initial prompt and the received parameter from the server
CCOIv2-REQ-328962/B-menu	bhamach3: icon reference removed, as covered by PTE logic
CCOIv2-REQ-328975/B-error	mkahlen: added the mapping between error prompt and the received parameter from the server
CCOIv2-REQ-329020/B-information	mkahlen: added the mapping between information prompt and the received parameter from the server
CCOIv2-FUN-REQ-296179/B-Notification of data and location sharing	bhamach3: Data/Location section replaced - FB4 requirement IDs removed
504595/B-Use Cases	hzubert: added some use cases
CCOIv2-UC-REQ-296180/C-show data sharing reminder	hzubert: description in more details
CCOIv2-UC-REQ-296181/C-show data sharing reminder Pop-Up+	kfent1: clarified post condition
CCOIv2-UC-REQ-296181/D-show data sharing reminder Pop-Up	bhamach3: CCS Client specifically referenced as actor
684019/A-Requirements	kfent1: transferred data/location sharing reminder logic from HMI Specification to SPSS (CCOIv2-FUN-REQ-296179/A-Notification of data and location sharing)
CCOIv2-REQ-362633/A-Data/Location sharing reminder	bhamach3: Requirement correction - "no sharing" was introduced with FB5. iconRules REQ number corrected.
CCOIv2-REQ-362913/A-Data/Location sharing reminder in error state	hzubert: initial release
CCOIv2-REQ-362914/A-Maintaining an acknowledged device list	hzubert: initial release
CCOIv2-REQ-362915/A-Definition of acknowledged devices	hzubert: initial release
CCOIv2-REQ-362916/A-Definition of devices	hzubert: initial release
CCOIv2-REQ-362917/A-USB devices which can get flagged as an acknowledged device	hzubert: initial release

CCOIv2-REQ-362918/A-USB devices cannot get flagged as an acknowledged device	hzubert: initial release	
CCOIv2-REQ-362919/A-Waiting for Bluetooth and USB initialization on triggering Data Location Sharing reminder	hzubert: initial release	
CCOIv2-REQ-362920/A-Do not save devices when screen is deactivated	hzubert: initial release	
CCOIv2-REQ-362921/A-Do not show data/location sharing reminder if acknowledged device is connected	hzubert: initial release	
CCOIv2-REQ-362922/A-Remove acknowledged devices from list on Reset	hzubert: initial release	
CCOIv2-TMR-REQ-362923/A-CCOI_MaxBTDeviceSearchTimeout	hzubert: initial release	
CCOIv2-TMR-REQ-362924/A-CCOI_DataSharingPopUpTimeout	hzubert: initial release	
CCOIv2-ACT-REQ-362930/A-User identification via paired/connected device for data sharing reminder Pop-Up	hzubert: initial release	
CCOIv2-STR-506066/D-Appendix: Reference Documents	mkahlen: added soa, ftcp, gcf reference	

December 12, 2019	1.4	Updated Release	
	CCOIv2-TBL-683964/B-Glossary	bhamach3: Clarification for Active Policy File added	
	CCOIv2-TBL-683966/B-Abbreviations	bhamach3: VSCS added	
	CCOIv2-685361/B-Interface Requirements	mkahlen: added new requirement	
	CCOIv2-REQ-362876/B-FNV SOA Proto File	mkahlen: added new subrequirement	
	CCOIv2-REQ-372144/A-Meta Data: Hash Value Format	mkahlen: new requirement	
	711615/A-Diagnostics Interface	mkahlen: added new requirements	
	711616/A-Method 2	mkahlen: added new requirements	
	CCOIv2-REQ-371613/A-Diagnostic Parameter for Country Code	mkahlen: included reference to country code DID	
	CCOIv2-TBL-711791/A-Diagnostic Parameters	mkahlen: included reference to country code DID	
	CCOIv2-REQ-371614/A-Diagnostic Parameter for Vehicle Brand	mkahlen: included reference to vehicle brand DID	
	CCOIv2-TBL-711792/A-Diagnostic Parameters	mkahlen: included reference to vehicle brand DID	
	CCOIv2-REQ-371615/A-Diagnostic Parameter for Backup Start Passcode	mkahlen: included reference to LBI/BSP DID	
	CCOIv2-TBL-711793/A-Diagnostic Parameters	mkahlen: included reference to LBI/BSP DID	
	CCOIv2-REQ-371616/A-Diagnostic Parameter to Show/Hide CCS Menu	mkahlen: included reference to hide CCS menu DID	
	CCOIv2-TBL-711794/A-Diagnostic Parameters	mkahlen: included reference to hide CCS menu DID	
	STR-683200/B-Functional Definition	Mkahlen: merged CCOIv2-FUN-REQ-362638/A-Update Entity Setting (Client) with CCOIv2-REQ-355042/A-OnBoardSynchronization (Client)	
	CCOIv2-REQ-362707/B-Effects of Driver Selecting Yes	bhamach3: Merge of File and Settings Synchronization	
	CCOIv2-REQ-362708/B-Effects of Driver Selecting No	bhamach3: Merge of File and Settings Synchronization	
	CCOIv2-REQ-362712/B-Effect of Master Reset	mkahlen: added a note about clear user settings that SYNC cannot dedect and close the pop-up	
	CCOIv2-REQ-296283/C-Effect of PTE or UFM Update	mkahlen: changed the requirement to match the implementation that the policy file transfer does not close a pop-up. If the Client receives an updated policy file with new text, the server does not always know to what text the driver gave consent for. This problem will be separately addressed in change request https://www.jira.ford.com/browse/ECG-40268.	

CCOIv2-SD-REQ-362647/B-Initial Prompt	bhamach3: Merge of File and Settings Synchronization. Removed scenario where UFM file replacement is handeled separately.
CCOIv2-SD-REQ-362648/B-Information and Error Prompt	mkahlen: Merge of File and Settings Synchronization. Removed scenario where UFM file replacement is handeled separately.
669577/B-Use Cases	bhamach3: Merge of File and Settings Synchronization, Deleted REQ-362319 (CCS menu shall not be accessible while OnBoardSynchronization), REQ-362321 (Combined with REQ-362320), REQ-362336 (No prompts triggered when not Synchronized))
CCOIv2-UCD-REQ-371112/A-Update Policy Files	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UC-REQ-357523/B-Turn ignition on	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UC-REQ-362912/B-Turn HMI System on	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UC-REQ-362282/B-Policy File or Entity Settings received from OffBoardPolicyClient	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UC-REQ-357525/B-Software Update	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UC-REQ-362320/B-Subscription Change while OnBoardSynchronization	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UCD-REQ-361932/B-Update Entity Settings	bhamach3: Merge of File and Settings Synchronization
CCOIv2-UC-REQ-355218/B-Change Consent Setting in Menu	mkahlen: merged file and setting synchronization; updated reference
CCOIv2-UC-REQ-355202/B-Configure Entity bSAllow	mkahlen: merged file and setting synchronization; updated reference
CCOIv2-UC-REQ-355203/B-Configure Entity bPAllow	mkahlen: merged file and setting synchronization; updated reference
CCOIv2-UC-REQ-355208/B-Reset	mkahlen: merged file and setting synchronization; updated reference
CCOIv2-UC-REQ-355201/B-Provisioning	mkahlen: merged file and setting synchronization; updated reference
CCOIv2-UC-REQ-355204/B-Change Lifecycle Mode	mkahlen: merged file and setting synchronization; updated reference
CCOIv2-UC-REQ-355212/B-Restore bUAllow Entity Settings	mkahlen: merged file and setting synchronization; updated reference
669576/B-Requirements (Client)	mkahlen: merged file and setting synchronization. included the requirements from the update entity setting synchronization in this section
CCOIv2-TBL-664710/B-State Transition Table	bhamach3: Merge of File and Settings Synchronization
CCOIv2-REQ-359108/B-Client Hash Check in State Synchronizing	bhamach3: Merge of File and Settings Synchronization
CCOIv2-REQ-358466/B-Hash Value match	bhamach3: SOA message reference corrected
CCOIv2-REQ-371111/A-No Hash Comparison Needed	bhamach3: Merge of File and Settings Synchronization
CCOIv2-REQ-359109/B-SynchronizationSessionRequest	bhamach3: SOA message reference corrected
CCOIv2-REQ-362811/B-Driver Changes a Setting in Menu	mkahlen: merged file and setting synchronization to include transition to onboard update pending before showing the user prompt
CCOIv2-REQ-296879/E-Entity toggle switch changed to "on"	mkahlen: merged file and setting synchronization. Updated the case where a driver declines a menu consent prompt to go back to synchronized state
CCOIv2-REQ-296880/E-Entity toggle switch changed to "off"	mkahlen: merged file and setting synchronization. Updated the case where a driver declines a menu consent prompt to go back to synchronized state
CCOIv2-REQ-362639/B-Client Sends Read Entity Setting Request on Start-up	mkahlen: added new subrequirement
CCOIv2-REQ-372235/A-Retry Reading Settings	mkahlen: new requirement
CCOIv2-ACT-REQ-362528/B-OnBoardSynchronization	bhamach3: Merge of File and Settings Synchronization
CCOIv2-STM-REQ-358305/B-OnBoardSynchronization	bhamach3: Merge of File and Settings Synchronization
669578/B-Sequence Diagrams	bhamach3: Merge of File and Settings Synchronization, CCOIv2-SD-REQ-371071 added. Removed CCOIv2-SD-REQ-361331/A-SynchronizationNeeded as it is included in CCOIv2-SD-REQ-358304-

		Synchronization. Added the sequence diagrams from the section that was previously entity setting updates.
	CCOIv2-SD-REQ-358303/B-Power On Sequence	mkahlen: merged file and setting synchronization
	CCOIv2-SD-REQ-358304/B-Synchronization	mkahlen: merged file and setting synchronization
	CCOIv2-SD-REQ-361332/B-SynchronizationFailed	mkahlen: merged file and setting synchronization
	CCOIv2-SD-REQ-362628/B-Distribute Entity Settings and Blacklist	mkahlen: added and blacklist to requirement name. Added loop to send the setting updates within synchronization until a ECU responds to cover cases where the ECG boots up faster than the TCU without having to go through synchronization loops
	CCOIv2-SD-REQ-371071/A-Queue Synchronization	bhamach3: Merge of File and Settings Synchronization
	CCOIv2-SD-REQ-321292/D-Change Consent Setting in Menu	mkahlen: merged file and setting synchronization. added reference to the que synchronization diagram instead of the entity setting update and included the reference that the client goes in onboardupdatepending when a customer tries to change a setting and goes into synchronized when a customer declines a menu consent prompt
	CCOIv2-SD-REQ-362624/B-bPAllow or bSAllow Configuration Change	bhamach3: Merge of File and Settings Synchronization
	CCOIv2-SD-REQ-371654/A-SYNC Swap	mkahlen: new requirement
	CCOIv2-SD-REQ-362627/B-Apply Dependencies	mkahlen: merged file and setting synchronization. renamed requiremetn from update settings onboard to apply dependencies. Added more details on how the persisint should take place in terms of making a working copy, applying the change, applying the dependencies and when to sent the alert with a reference to the queue synchronization. Also moved the blacklist calculation to the synchronization.
	CCOIv2-SD-REQ-371082/A-Reset	mkahlen: initial release
	CCOIv2-SD-REQ-371084/A-Lifecycle Mode Change	mkahlen: initial release
	CCOIv2-SD-REQ-362625/B-Provisioning	mkahlen: addition to handle data storage error
	CCOIv2-SD-REQ-372229/A-SMS Wake Up	mkahlen: new requirement
	CCOIv2-REQ-329004/C-DefaultEntitySettingPolicies	mkahlen: added note that the country code change only takes effect when default settings are applied
	CCOIv2-REQ-329005/B-DefaultEntityLifecycleModeSettings	mkahlen: added a reference to the CAN interface
	CCOIv2-REQ-328928/B-regionDefinitions	mkahlen: added a reference to the diagnostic parameters
	CCOIv2-REQ-328973/B-confirmation_off_plusLBI	mkahlen: added reference to diagnostic parameter
	CCOIv2-REQ-328974/B-confirmation_off_plusLBI_IVSU	mkahlen: added reference to diagnostic parameter
	CCOIv2-REQ-328977/B-ford_app	mkahlen: added a reference to the diagnostic parameter
	CCOIv2-REQ-328978/B-lincoln_app	mkahlen: added a reference to the diagnostic parameter
	CCOIv2-REQ-328979/B-ford_brand	mkahlen: added a reference to the diagnostic parameter
	CCOIv2-REQ-328980/B-lincoln_brand	mkahlen: added a reference to the diagnostic parameter
	CCOIv2-REQ-328981/B-ford_modemName	mkahlen: added a reference to the diagnostic parameter
	CCOIv2-REQ-328982/B-lincoln_modemName	mkahlen: added a reference to the diagnostic parameter
	CCOIv2-REQ-362920/B-Do not save devices when screen is deactivated	mkahlen: added an additional example for reverse view camera
April 22, 2020	1.5	Updated Release	
	CCOIv2-TBL-683964/C-Glossary	bhamach3: Pre-Seeded and LastKnownGood added
	752015/A-User Requirements	mkahlen: new section
	752016/A-Use Cases	mkahlen: new paragraph
	CCOIv2-UC-REQ-386209/A-Driver Starts a Non-connected or eCall only Vehicle	mkahlen: new use cases giving an overview over non-connected markets
	CCOIv2-UC-REQ-326207/C-Authorize Fleet Telematics	mkahlen: added more details around what the customer sees in the ccs menu
	CCOIv2-UC-REQ-355963/B-De-authorize Fleet Telematics	mkahlen: added more details around what the customer sees in the ccs menu

CCOIv2-UC-REQ-386210/A-Fleet Privacy Services Enrollment	mkahlen: new use case giving an overview over fleet privacy services enrollment
CCOIv2-UC-REQ-386211/A-Fleet Privacy Services Un-enrollment	mkahlen: new use case giving an overview over the fleet privacy services unsubscription scenario
CCOIv2-REQ-362874/B-ECG SOA Proto File	mkahlen: removed SpcmCcsmBlacklistReadReq and SpcmCcsmBlacklistReadResp from SOA proto files. Going forward CCS will only use SpcmCcsmBlacklistUpdateInd
STR-683200/C-Functional Definition	mkahlen: added new section on network disconnect for APIM
CCOIv2-REQ-317863/D-Error Pop-Up "Feature Unavailable"	mkahlen: removed the condition to display this error message when a driver tries to change an entity setting. The reason for that is that the other two conditions (when in menu or when trying to enter menu) already rule out that a driver can change any entity settings in that state. The reason for includign it in the first place was being able to change consent and trigger consent pop-ups from outside the CCS menu or triggered by the server. This will be needed in the future but will be adressed separately in a CR.
CCOIv2-REQ-317866/D-Local Update Pop-Up	mkahlen: removed the condition to display this error message when a driver tries to change an entity setting. The reason for that is that the other two conditions (when in menu or when trying to enter menu) already rule out that a driver can change any entity settings in that state. The reason for includign it in the first place was being able to change consent and trigger consent pop-ups from outside the CCS menu or triggered by the server. This will be needed in the future but will be adressed separately in a CR.
CCOIv2-UC-REQ-357525/C-Software Update	bhamach3: Changed to match implementation - SW updates will only become effective after ignition cycle, the State Machine is not affected.
669576/C-Requirements (Client)	mkahlen: added new requirement about hearbeat signal. Removed requirements CCOIv2-REQ-362639/B-Client Sends Read Entity Setting Request on Start-up, CCOIv2-REQ-372235/A-Retry Reading Settings, and CCOIv2-REQ-362640/A-Store Server Entity Settings on Client: Client Starts-up as SYNC has the last known good settings and will synchronize with the server to get the latest settings as soon as it starts up
CCOIv2-TBL-664710/C-State Transition Table	bhamach3: DataStorageError, Invalid transition updated to match implementation
CCOIv2-REQ-362524/B-Invalid to Waiting	bhamach3: Updated to match implementation - no state transition in case of SW update
CCOIv2-REQ-362525/B-Any to Invalid	bhamach3: Updated to match implementation - no state transition in case of SW update
CCOIv2-REQ-377210/A-CCSOnBoardPolicyClient Synchronization Heartbeat Signal	mkahlen: new requirement
CCOIv2-ACT-REQ-362528/C-OnBoardSynchronization	bhamach3: Added dependency, if ModemClient is present
CCOIv2-STM-REQ-358305/C-OnBoardSynchronization	bhamach3: Updated allowed DataStorageError transitions to match implementation
CCOIv2-SD-REQ-358304/C-Synchronization	mkahlen: when no TCU present the server does not need to wait for a response from the TCU
CCOIv2-UC-REQ-296189/E-Enforce policies	mkahlen: removed reference to REQ-355983 Update Settings Onboard. Since v.1.4 this requirement about settings updates was removed as it was merged with synchronization. Replaced with reference to onboard synchronization.
CCOIv2-REQ-328986/B-Policy File compression	mkahlen: per CR FNV-5389 the compression format is changed from GZIP to LZMA due to the policy file size that does not fit into a 256 kb ftcp message
CCOIv2-REQ-328925/C-userActions	mkahlen: corrected typo for SPCM_CCSM_PROMPT_RESULT_SELECT_NO where we replaced affirmative with negative
CCOIv2-FUN-REQ-386300/A-Network Disconnect (Client)	mkahlen: new section
CCOIv2-UC-REQ-306740/D-Network Disconnect	mkahlen: removed reference to REQ-355983 Update Settings Onboard. Since v.1.4 this requirement about settings updates was removed as it was merged with synchronization. Replaced with reference to onboard synchronization. Added information about hard disconnect timeout.
CCOIv2-UC-REQ-312154/D-Network Re-Connect	mkahlen: removed reference to REQ-355983 Update Settings Onboard. Since v.1.4 this requirement about settings updates was removed as it was merged with synchronization. Replaced with reference to onboard synchronization. Clarified use case wording

	753369/A-Requirements (Client)	mkahlen: new section
	CCOIv2-REQ-386514/A-Disconnect from Wifi Networks	mkahlen: new requirement (was already aligned and implemented before but is now explicitly included in the SPSS)
	CCOIv2-REQ-386515/A-Reconnect to Wifi Networks	mkahlen: new requirement (was already aligned and implemented before but is now explicitly included in the SPSS)

Table of Contents

1 Terms and Definitions

Term	Definition
Active Policy Table	See REQ-296316
Back end	Cloud module communicating with the vehicle
CCSOffBoardPolicyClient	The ARMR/APCA cloud component that communicates with the vehicle, which hosts the CCS entity settings, PTE, SCF, and UFM files and user prompt logic on the cloud.
Connected Feature	Any feature/application/service which utilizes the connection to any offboard environment including Ford Backend and 3rd party services
Data Element	Atomic unit of data managed by customer opt-in.
Factory	The place where the vehicle is produced and configured. Also referred to as plant
Feature	*Functions* working as a distributed system to provide meaningful functionality to users.
Function	*Functions* are logical entities exchanging and processing data elements.
- *On-Board* Function	*Function* deployed onto a specific *vehicle module*.
- *Off-Board* Function	*Function* deployed onto a specific off-board system, i.e. hardware not part of the vehicle product.
HMI System	*In-Vehicle System* providing Human Machine Interface (HMI) for viewing and controlling connectivity settings. Assumption on FNV2 system: SYNC4 is only available HMI system.
In-Vehicle System	Consists of the portion of the CCS System running on vehicle modules and vehicle communication systems.
CCSOnBoardPolicyServer	Portion of the CCS In-Vehicle System running on the Enhanced Central Gateway Vehicle Module.
CCSOnBoardPolicyClient	Portion of the CCS In-Vehicle System running on the SYNC Vehicle Module.
CCSOnBoardPolicyModemClient	Portion of the CCS In-Vehicle System running on the TCU Vehicle Module.
LastKnownGood Policy Files	See REQ-296327
Opt-In Status	State of a *policy governed entity*, whether it is allowed for transmission or if it is not allowed for transmission of a particular category of data.
Policy Enforcer	CCS component applying the blacklist received from CCS OnBoardPolicyServer
Policy-Governed Entity	*Data Element, Function, Feature, or Meta* which is managed by customer opt-in.

Portal	An interface via which changes to *Opt-In Status* can be made. Examples would be:
	    – The HMI System
	    – An App

Pre-Seeded Policy Files	Default Policy Files, which are pre-installed with the CCS Server Software. Those files are permanently stored.
User	Human being interacting with the HMI system.

Term	Definition
− *Driver*	User who is driving the vehicle. May or may not be a registered user.
− *Registered User*	User has registered a personal account with Ford.
− *Authorized User*	Registered user who authorized association with a vehicle through the vehicle's HMI system.
− *ARMR Admin*	A user with admin privileges for the CCS ARMR backend to upload new CCS policy files to the CCSOffBoardPolicyClient.
Vehicle Communication Systems	Vehicle Communication Systems are used to exchange data in between vehicle modules. Typical examples are CAN-bus and automotive Ethernet.
Vehicle Module	Piece of hardware capable of running software programs, i.e. processing, transmitting and storing of data, being part of the vehicle product.

Table 1 – Glossary

Abbreviation	Meaning
ALM	Application Lifecycle Manager, framework to securely install, launch, stop, upgrade, and uninstall applications on the ECG
ARMR	Applink Remote Management and Reporting
CCOI	Connectivity Customer Opt-In
CCS	Customer Connectivity Settings (used synonymously with CCOI)
CFM	Customer Friendly Messages (policy table file)
ECG	Enhanced Central Gateway
FCI	Ford Cloud Interface. A component on the ECG and TCU that sends the FTCP messages to the cloud.
FOTA	Firmware Over the Air Update, same MMOTA
FTCP	Ford Telematics Communication Protocol
GUI	Graphical User Interface – the display to show information to the driver in the vehicle
HMI	Human Machine Interface
IVSU	In Vehicle Software Update
MMOTA	Multi-module Over the Air Update, same as FOTA
NGSDN	Next Generation Service Delivery Network
OGC	Office of General Council
PII	Personally Identifiable Information
PTE	Policy Table Extension (policy table file)
RPC	Remote Procedure Call
SCF	Service Config File (policy table file)
SDN	Service Delivery Network
SOA	Service Oriented Architecture and is used to reference the onboard Ethernet communication
TCU	Telematics Control Unit
UFM	User Friendly Messages (policy table file, used synonymously with CFM)
VIM	Vehicle Information Manager – VIM transforms vehicle CAN data received from traditional CAN network of ECUs (upstream) to rich information called primitives for consumption by services/features resident on ECUs connected to advanced Ethernet domain. Likewise, VIM generates CAN signals from primitives to command CAN network of ECUs (downstream)
VSCS	Vehicle Specific Configuration Specification, containing CCS default Config Parameter values which may depend on region, vehicle type, etc.

Table 2 – Abbreviations

2 User Requirements

2.1 Use Cases

The User Requirements section is meant as an overview over various use cases that can be achieved through the interaction of configuration parameters and the functional definition. The list of use cases in this section is not exhaustive and may change if the configuration (such as policy files) are changed.

2.1.1 CCOIv2-UC-REQ-386209/A-Driver Starts a Non-connected or eCall only Vehicle

Actors	Driver, Vehicle
Pre-conditions	- Vehicle has an ECG and a SYNC - Vehicle does not have a TCU (non-connected markets) or does have a TCU (eCall only markets) (REQ-377208) - SYNC is configured not to show CCS menu (REQ-371616, H31j.R157) - Vehicle is not provisioned (and remains un-provisioned) (REQ-296877). Note: some eCall only vehicles may be provisioned. - ECG is configured not to show user prompts by setting UserPrompt_Max_Cycles to zero (REQ-362675, REQ-362884) - ECG is configured not to support any privacy settings or connected features by setting all bPallow DIDs for CCS meta (REQ-371619) and feature settings (REQ-371620) to off (REQ-296877). For exceptions see "List of Exception Use Cases" below. - The mobile app is configured not to show the modem authorization option for VINs that do not have a TCU
Scenario Description	1. Driver adds the VIN of the vehicle to the mobile app 2. Driver starts the vehicle 3. Driver navigates to the connectivity settings through the icon bar 4. Driver navigates to the connectivity settings through the main menu
Post-conditions	1. In the mobile app the driver does not see the option to activate the vehicle 2. In the vehicle the driver does not see the vehicle activation (Avenue A REQ-306742) pop-up, does not see a data sharing icon (REQ-296180) and does not see a reminder pop-up (REQ-296181) 3. In the vehicle the driver does not see the Connected Vehicle Feature settings menu entry (H31j.R157). 4. In the vehicle the driver does not see the Connected Vehicle Feature settings menu entry when navigating over the icon bar to the settings (H31j.R157).
List of Exception Use Cases	If the vehicle is equipped with embedded navigation the following pre-conditions apply: The following configurations need to be enabled.. - Capability bPAllow for the EmbeddedNavigation entity (ID 60, ID 1) bPAllow_FEATURE60_EmbeddedNavigation is enabled (REQ-371619) - Subscription bSAllow for the EmbeddedNavigation entity (ID 60, ID 1) bSAllow_FEATURE60_EmbeddedNavigation is enabled (REQ-371619) Additionally, the following configurations may be enabled depending on vehicle's capability.. - Capability bPAllow for the TowingNavigationentity (ID 58, ID 1) bPAllow_FEATURE58_TowingNavigation is enabled (REQ-371619) - Subscription bSAllow for the TowingNavigationentity (ID 58, ID 1) bSAllow_FEATURE58_TowingNavigation is enabled (REQ-371619)
Interfaces	

2.1.2 CCOIv2-UC-REQ-326207/C-Authorize Fleet Telematics

Actors	Fleet Owner, Vehicle, Fleet Owner's Portal
Pre-conditions	-
Scenario Description	• Fleet Owner subscribes the vehicle's VIN for Fleet Telematics in the Fleet Owner's portal • Includes CCOIv2-UC-REQ-355202-Configure Entity bSAllow for entity Fleet (ID 2, Type 1) • Continue with use case REQ-355207 Authorization Status Change

Post-conditions	The following Privacy Settings are hidden from drivers:
	    • Vehicle Connectivity
	    • Share Vehicle Data
	    • Share Vehicle Location
	    • Share Driving Data
	The following, additional Privacy Settings are shown to drivers:
	    • Fleet Telematics

List of Exception Use Cases	-
Interfaces	-

2.1.3 CCOIv2-UC-REQ-355963/B-De-authorize Fleet Telematics

Actors	Fleet Owner
Pre-conditions	-
Scenario Description	1. Fleet Owner un-subscribes the vehicle's VIN for Fleet Telematics in the Fleet Owner's portal • Includes CCOIv2-UC-REQ-355202-Configure Entity bSAllow for entity Fleet (ID 2, Type 1) 2. Continue with use case REQ-355207 Authorization Status Change

Post-conditions	The following Privacy Settings are shown to drivers
	    • Vehicle Connectivity
	    • Share Vehicle Data
	    • Share Vehicle Location
	    • Share Driving Data
	The following Privacy Settings are hidden from drivers
	    • Fleet Telematics

List of Exception Use Cases	-
Interfaces	

2.1.4 CCOIv2-UC-REQ-386210/A-Fleet Privacy Services Enrollment

Actors	Fleet Owner, Vehicle, Fleet Owner's Portal
Pre-conditions	Vehicle is enrolled for fleet telematics (UC-REQ-326207)

Scenario Description	1. Fleet Owner subscribes the vehicle's VIN for Fleet Privacy Services in the Fleet Owner's portal
	    a) Includes UC-REQ-355216-Prompt User to Get Driver's Consent where the backend sends an information prompt with message code 2000
	    b) Includes UC-REQ-355202-Configure Entity bSAllow for entity FleetPrivacyServices (ID 42, Type 1)

2. Driver turns ignition on
3. Driver sees information pop-up informing the driver that the driver is granted permission to change the privacy settings
4. Driver clicks close on the information pop-up
5. Driver navigates to the Connected Vehicle Feature Settings
6. Driver disables Share Driving Data
7. Driver disables Share Location Data
8. Driver disables Share Vehicle Data

Post-conditions	5. Vehicle Connectivity and Fleet Telematics are hidden from the driver
	6. Share Driving Data is disabled
	7. Share Location Data is disabled
	8. Share Vehicle Data is disabled
List of Exception Use Cases	-
Interfaces	-

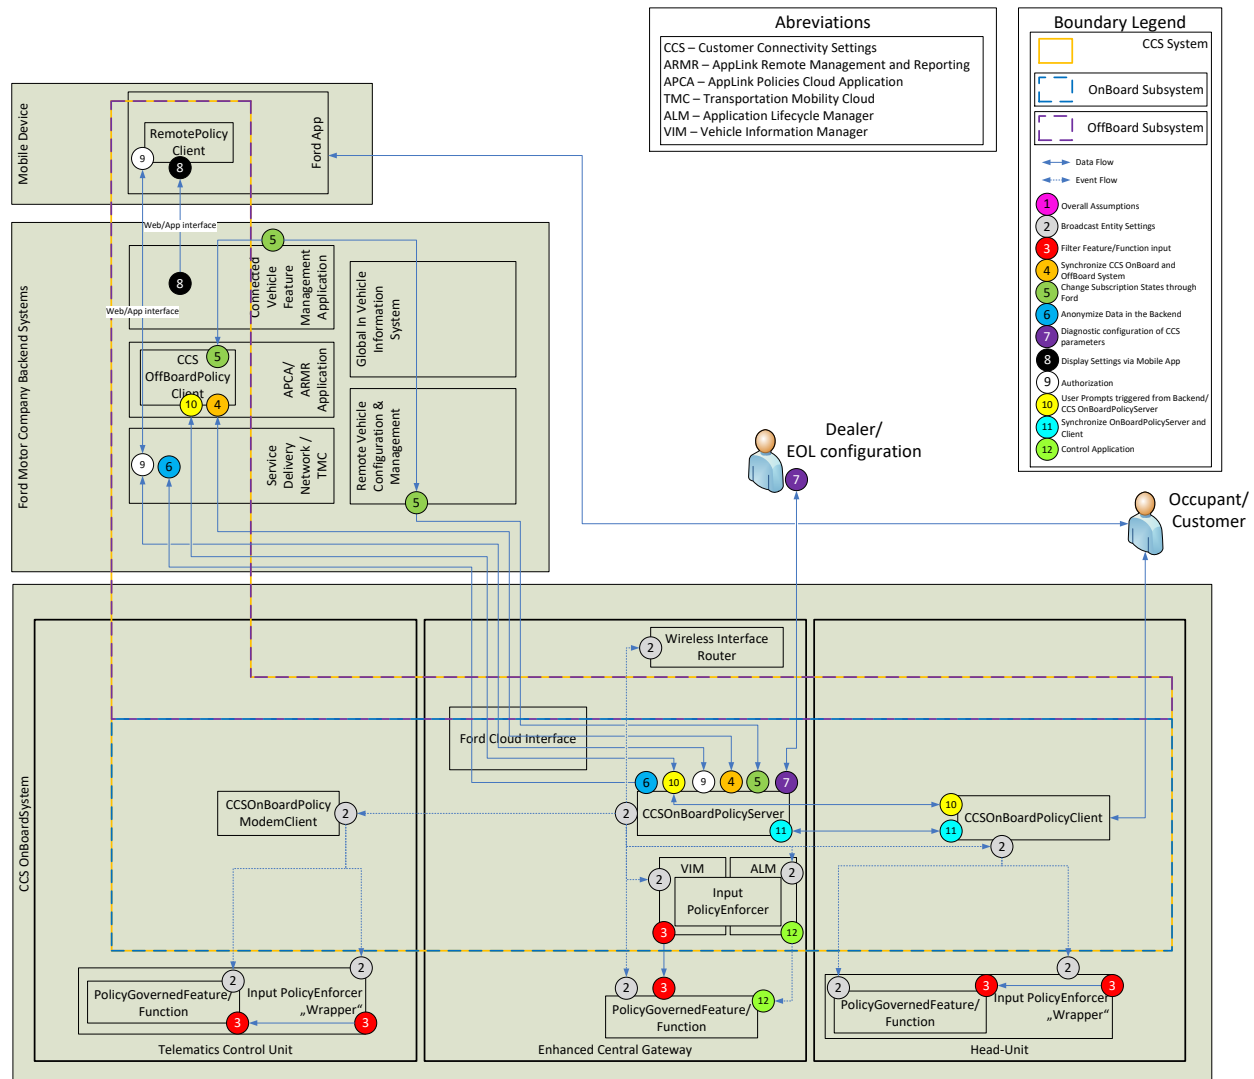### 2.1.5 CCOIv2-UC-REQ-386211/A-Fleet Privacy Services Un-enrollment

Actors	Fleet Owner, Vehicle, Fleet Owner's Portal
Pre-conditions	Vehicle is enrolled for fleet telematics (UC-REQ-326207)
	Vehicle is enrolled for fleet privacy services (UC-REQ-355963)
Scenario Description	1. Fleet Owner un-subscribes the vehicle's VIN for Fleet Privacy Services in the Fleet Owner's portal
	• Includes UC-REQ-355216-Prompt User to Get Driver's Consent where the backend sends an information prompt with message code 8
	• Includes UC-REQ-355202-Configure Entity bSAllow for entity FleetPrivacyServices (ID 42, Type 1)
	2. Driver turns ignition on
	3. Driver sees information pop-up informing the driver that the driver is no longer granted the permission to change the privacy settings and all privacy settings are enabled
	4. Driver clicks close on the information pop-up
	5. Driver navigates to the Connected Vehicle Feature Settings
Post-conditions	Same as UC-REQ-326207-Authorize Fleet Telematics
List of Exception Use Cases	-
Interfaces	-

3 Architectural Design

3.1 Boundary Diagram

3.1.1 CCOIv2-BD-REQ-362932/A-Customer Connectivity Settings

3.2 Interface Requirements

3.2.1 SOA Interface

3.2.1.1 *CCOIv2-REQ-362874/B-ECG SOA Proto File*

Name	Description
SpcmCcsmEntitySettingsUpdateInd	Protobuf used to publish CCS entity settings to all interested parties
SpcmCcsmEntitySettingsUpdateResp	Protobuf used by CCS client(s) to respond to CCS entity settings update indication
SpcmCcsmBlacklistUpdateInd	Protobuf used to publish CCS blacklist to all interested parties
SpcmCcsmEntitySettingsReadReq	Protobuf used to read CCS entity settings

SpcmCcsmEntitySettingsReadResp	Protobuf used to respond to CCS entity settings read request
SpcmCcsmSynchronizationSessionReq	Protobuf used to request a synchronization session between OnBoardHMISystemPolicyClient and the OnBoardPolicyServer.
SpcmCcsmSynchronizationSessionResp	Protobuf used to update the policy files and entity settings on CCOIOnBoardHMISystemPolicyClient
SpcmCcsmOnBoardPolicyServerStateInd	Protobuf used to inform the CCOIOnBoardHMISystemPolicyClient about the state of the CCOIOnBoardPolicyServer
SpcmCcsmEntityStatus	Message structure holder of individual entity setting and its Allow bits
SpcmCcsmBlacklist	Message structure holder of blacklisted items
SpcmCcsmBlacklistType	Enumeration of different blacklist types

For message details see ECG SOA Proto File.

3.2.1.2   CCOIv2-REQ-362875/A-SYNC SOA Proto File

Name	Description
SpcmCcsmSettingsUpdateInd	Protobuf used to request activation or deactivation of policy governed entities
SpcmCcsmSynchronizationSummaryReportInd	Protobuf used to respond to and at the same time end a synchronization session with a report of the result.
SpcmCcsmUserPromptReq	Protobuf used to request the HMI to display a user prompt
SpcmCcsmUserPromptResp	Protobuf used to provide the response to a prompt request.
SpcmCcsmOnBoardHMISystemPolicyClientStateInd	Protobuf used to inform the CCOIOnBoardPolicyServer about the state of the CCOIOnBoardHMISystemPolicyClient
SpcmCcsmEntityUserAllowStatus	Message structure holder of an entity's UAllow bit change request for SettingsUpdate_Rq
SpcmCcsmClientCommandType	Enumeration of different CCSM client commands

For message details see SYNC SOA Proto File.

3.2.1.3   CCOIv2-REQ-362876/B-FNV SOA Proto File

Name	Description
UTCDateTime	Message structure for capturing UTCDateTime (not from CAN signals). This message structure is used by both Cloud and Vehicle for capturing real timestamp. Cloud shall populate this from System time and vehicle shall populate this from carrier cellular network.
PolicyGovernedCCSFile	Policy Governed CCS File binary for storage in the ECU(ECG/TCU)
PolicyGovernedCCSFileMetaData	Policy Governed CCS File binary for storage in the ECU(ECG/TCU)
Entity	Message structure for Meta/Feature
EntityTypeENUM	Entity Type
CCSDataSynchronizationStateEnum	CCS Data Sychronization States

For message details see FNV SOA Proto File.

3.2.1.3.1   CCOIv2-REQ-372144/A-Meta Data: Hash Value Format

The "fingerprintSHA256" hash value in PolicyGovernedCCSFileMetaData is transferred in hexadecimal format.

3.2.2   Diagnostics Interface

3.2.2.1   Method 2

3.2.2.1.1   CCOIv2-REQ-371613/A-Diagnostic Parameter for Country Code

The table below lists parameters for the CCSOnBoardPolicyClient that are accessible via diagnostics, the supplier, or by Ford via DET, EOL or OTA. The list of CCOI configurable parameters shall be identified in the CCOI Subsystem Specification Diagnostic Specification (Part 2).

CCOI Configurable Parameters or Diagnostics Values
First Letter of Country Code – ASCII
Second Letter of Country Code – ASCII

Table 3 – Diagnostic Parameters

3.2.2.1.2   CCOIv2-REQ-371614/A-Diagnostic Parameter for Vehicle Brand

The table below lists parameters for the CCSOnBoardPolicyClient that are accessible via diagnostics, the supplier, or by Ford via DET, EOL or OTA. The list of CCOI configurable parameters shall be identified in the CCOI Subsystem Specification Diagnostic Specification (Part 2).

CCOI Configurable Parameters or Diagnostics Values
Brand

Table 4 – Diagnostic Parameters

3.2.2.1.3   CCOIv2-REQ-371615/A-Diagnostic Parameter for Backup Start Passcode

The table below lists parameters for the CCSOnBoardPolicyClient that are accessible via diagnostics, the supplier, or by Ford via DET, EOL or OTA. The list of CCOI configurable parameters shall be identified in the CCOI Subsystem Specification Diagnostic Specification (Part 2).

CCOI Configurable Parameters or Diagnostics Values
Backup Start Passcode (aka LBI)

Table 5 – Diagnostic Parameters

3.2.2.1.4   CCOIv2-REQ-371616/A-Diagnostic Parameter to Show/Hide CCS Menu

The table below lists parameters for the CCSOnBoardPolicyClient that are accessible via diagnostics, the supplier, or by Ford via DET, EOL or OTA. The list of CCOI configurable parameters shall be identified in the CCOI Subsystem Specification Diagnostic Specification (Part 2).

CCOI Configurable Parameters or Diagnostics Values
Customer Connectivity Setting

Note: this setting does not disable CCS but it hides the menu entry "Connected Vehicle Features". For more information see the HMI specification requirement [H31j.R157] (SYNC-87979)].

Table 6 – Diagnostic Parameters

4   Functional Definition

4.1   CCOIv2-FUN-REQ-362533/A-User Prompt and Modem activation (Client)

4.1.1   Use Cases

4.1.1.1   CCOIv2-UC-REQ-355216/A-Prompt User to Get Driver's Consent

Actors	CCSOffBoardPolicyClient, Driver, CCSOnBoardPolicyClient, CCSOnBoardPolicyServer
Pre-conditions	Ignition is OFF
Scenario Description	1. CCSOffBoardPolicyClient sends User Prompt Command to CCSOnBoardPolicyServer 2. CCSOnBoardPolicyServer sends User Prompt Command Response to CCSOffBoardPolicyClient 3. Driver turns ignition ON 4. CCSOnBoardPolicyServer triggers the user prompt on the CCSOnBoardPolicyClient 5. CCSOnBoardPolicyClient shows user prompt on vehicle 6. Driver confirms the user prompt 7. CCSOnBoardPolicyClient informs the CCSOnBoardPolicyServer about the driver's choice 8. CCSOnBoardPolicyServer informs the CCSOffBoardPolicyClient about the driver's choice with a correlated user prompt alert
Post-conditions	-

List of Exception Use Cases	E1:
	1b) CCSOffBoardPolicyClient sends User Authorization Command to CCSOnBoardPolicyServer
	   .1 instead of step 2 CCSOnBoardPolicyServer sends User Authorization Command Response to CCSOffBoardPolicyClient
	   .2 proceed with step 3.
	
	E2:
	1c) A trigger condition at the CCSOnBoardPolicyServer is met (REQ-362658) for an onboard-triggered user prompt
	    .1 proceed with step 3
	    .2 skip step 8. of the Scenario Description
	
	E3:
	3a) Ignition is already ON
	   .1 skip step 3. and proceed with step 4.
	
	E4:
	5a) The head unit shows higher prioritized pop-ups
	    .1 CCSOnBoardPolicyClient shows the user prompt after the higher prioritized pop-ups
	    .2 proceed with step 6
	
	E5:
	6a) Driver chooses "Ask me Later" or turns ignition off without making a choice
	    .1 proceed with step 7. of the Scenario Description
	    .2 After step 7. go back to step 3. to retry
	
	E6:
	6b) Driver declines the user prompt
	    .1 proceed with step 7. of the Scenario Description
	
	E7:
	6c) The prompt type is "information" or "error"
	    .1 The driver closes the pop-up
	    .2 continue with step 7. of the Scenario Description

Interfaces	GUI, SOA, FCI

4.1.2 Requirements

4.1.2.1 CCOIv2-REQ-362705/A-Fail User Prompt when screenID or promptType Unknown

When the CCSOnBoardPolicyClient receives a SpcmCcsmUserPromptReq for which the
- the messageCode corresponding to the received "screenId" does not exist in the UFM file (REQ-328949-messageCode (User Friendly Messages))

OR
- the text for that "screenId" and "promptType" combination does not exist (REQ-328953-initalPrompt, REQ-328975-error, REQ-329020-information), OR is empty, OR is NULL in the UFM file (REQ-328983-Missing content strategy)

the CCSOnBoardPolicyClient shall send a correlated SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer as "SPCM_CCSM_PROMPT_RESULT_FAILED".

4.1.2.2 CCOIv2-REQ-296287/B-User Prompt Handling as per PTE and UFM

When the CCSOnBoardPolicyClient receives a SpcmCcsmUserPromptReq
AND
the requirement REQ-362705-Fail User Prompt when screenID or promptType Unknown is not met
AND
requirements from HMI specification H31j are met
the CCSOnBoardPolicyClient shall show a user prompt to the Driver as follows:

4.1.2.2.1 CCOIv2-REQ-318320/C-User Prompt Handling promptType Initial Prompt

If promptType is set to "SPCM_CCSM_PROMPT_TYPE_INITIAL_PROMPT", the CCSOnBoardPolicyClient shall trigger a user prompt with HMI pop-up ID 10 and message content from the CFM file (REQ-328949-messageCode (User Friendly Messages), REQ-328953-initalPrompt).

4.1.2.2.2 CCOIv2-REQ-318321/B-User Prompt Handling promptType Error

If promptType is set to "SPCM_CCSM_PROMPT_TYPE_ERROR", CCSOnBoardPolicyClient shall trigger a user prompt with HMI pop-up ID 27 and message content from the CFM file (REQ-328949-messageCode (User Friendly Messages), REQ-328975-error).

4.1.2.2.3 CCOIv2-REQ-318322/C-User Prompt Handling promptType Information

If promptType is set to "SPCM_CCSM_PROMPT_TYPE_INFORMATION", CCSOnBoardPolicyClient shall trigger a user prompt with HMI pop-up ID 36 and message content from the CFM file (REQ-328949-messageCode (User Friendly Messages), REQ-329020-information).

4.1.2.3 CCOIv2-REQ-362706/A-Events Impacting User Prompts

4.1.2.3.1 CCOIv2-REQ-362707/B-Effects of Driver Selecting Yes

If the user selects "yes" on the user prompt, the CCSOnBoardPolicyClient shall at the same time:
- close the prompt and send the user's choice via SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_YES"
- trigger a user prompt with HMI pop-up ID 24 and message content from the CFM file (REQ-328949-messageCode (User Friendly Messages), REQ-328960-button1ConfirmationText) if applicable (REQ-328983-Missing content strategy).
- transition to Synchronization State "OnBoardUpdatePending".

4.1.2.3.2 CCOIv2-REQ-362708/B-Effects of Driver Selecting No

If the user selects "no" on the user prompt, the CCSOnBoardPolicyClient server shall close the pop-up.

If there is text available for a confirmation prompt (REQ-328983-Missing content strategy) the CCSOnBoardPolicyClient shall trigger a user prompt with HMI pop-up ID 16 and message content from the CFM file (REQ-328949-messageCode (User Friendly Messages), REQ-328961-button2ConfirmationText).
- If on the driver clicks "ok" on the confirmation prompt, the CCSOnBoardPolicyClient shall

- o send the user's choice via SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_NO".
  - o transition to Synchronization State "OnBoardUpdatePending".
- If the driver clicks "cancel" on the confirmation prompt, the CCSOnBoardPolicyClient shall go back to pop-up with HMI ID 16 as described above.

If there is no text available for a confirmation prompt (REQ-328983-Missing content strategy) the CCSOnBoardPolicyClient sends the user's choice via SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_NO" and transitions to Synchronization State "OnBoardUpdatePending".

4.1.2.3.3   CCOIv2-REQ-362709/A-Effects of Driver Selecting Ask Me Later

If the user selects "ask me later" on the user prompt, the CCSOnBoardPolicyClient server shall close the pop-up and send the user's choice via SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_ASKMELATER".

4.1.2.3.4   CCOIv2-REQ-362710/A-Effects of Driver Selecting Close

If the user selects "closed" on the user prompt, the CCSOnBoardPolicyClient server shall close the prompt and send the user's choice via SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer with promptResult = "SPCM_CCSM_PROMPT_RESULT_DISPLAYED".

4.1.2.3.5   CCOIv2-REQ-362711/A-Effects of Driver turning Ignition Off without Making Choice

If the user turns of ignition without making a choice, the CCSOnBoardPolicyClient server shall close the pop-up.

4.1.2.4   CCOIv2-REQ-362712/B-Effect of Master Reset

If the Driver performs a reset (Master Reset Brand, Connect Reset, or ClearUserSettingsCommand), the CCSOnBoardPolicyClient shall close all pending user prompts and send a SpcmCcsmUserPromptResp with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_NO".

Note: as long as the CCSOnBoardPolicyClient is not informed about a ClearUserSettingsCommand it is a known limitation that a prompt may still be displayed to a driver after the ClearUserSettingsCommand has already been failed by the CCSOnBoardPolicyServer.

4.1.2.5   CCOIv2-REQ-296283/C-Effect of PTE or UFM Update

If the CCSOnBoardPolicyClient receives a new UFM file, the CCSOnBoardPolicyClient shall re-check for "REQ-362705-Fail User Prompt when screenID or promptType Unknown". If the user prompt passes the check with the new UFM file, then update the text in the user prompt. If the user prompt fails the check with the new UFM file, then proceed as outlined in REQ-362705.

4.1.2.6   CCOIv2-REQ-362714/A-Effect of Data Storage Error

If the CCSOnBoardPolicyClient transitions to the state "DataStorageError", the CCSOnBoardPolicyClient shall close all user prompts and shall not send a SpcmCcsmUserPromptResp to the CCSOnBoardPolicyServer.

Rationale: if the Client is in Data Storage it cannot be guaranteed that a response reaches the Server. Therefore, the Server has already canceled all user prompts and informed the backend and the Client just needs to close all pop-ups.

4.1.2.7   CCOIv2-REQ-362715/A-Performance Requirements

4.1.2.7.1   CCOIv2-REQ-362716/A-Time to Display User Prompts

4.1.2.7.1.1   CCOIv2-REQ-362718/A-Time to Display User Prompts: Happy Path

If the CCSOnBoardPolicyClient receives a SpcmCcsmUserPromptReq AND no higher priority pop-up is shown (see HMI requirements) the CCSOnBoardPolicyClient shall show a user prompt within 1 second of receiving the trigger for a user prompt.

4.1.2.7.1.2 CCOIv2-REQ-362719/A-Time to Display User Prompts: Higher Priority Pop-ups Present

If the CCSOnBoardPolicyClient receives a SpcmCcsmUserPromptReq AND higher priority pop-ups are shown (see HMI requirements) the CCSOnBoardPolicyClient shall show a user prompt within 1 second after all higher priority pop-ups were closed.

4.1.2.7.2 CCOIv2-REQ-362717/A-Maximum Length of Variable Text

The CCSOnBoardPolicyClient shall be able to display variable text (REQ-296368-User Friendly Messages variables) of up to 1500 characters.

Rationale: the CCSOffBoardServer can only send up to 1500 characters as variable text in the FTCP messages.

4.1.3   Sequence Diagrams

4.1.3.1   CCOIv2-SD-REQ-362645/A-Prompt Server To get Drivers Consent
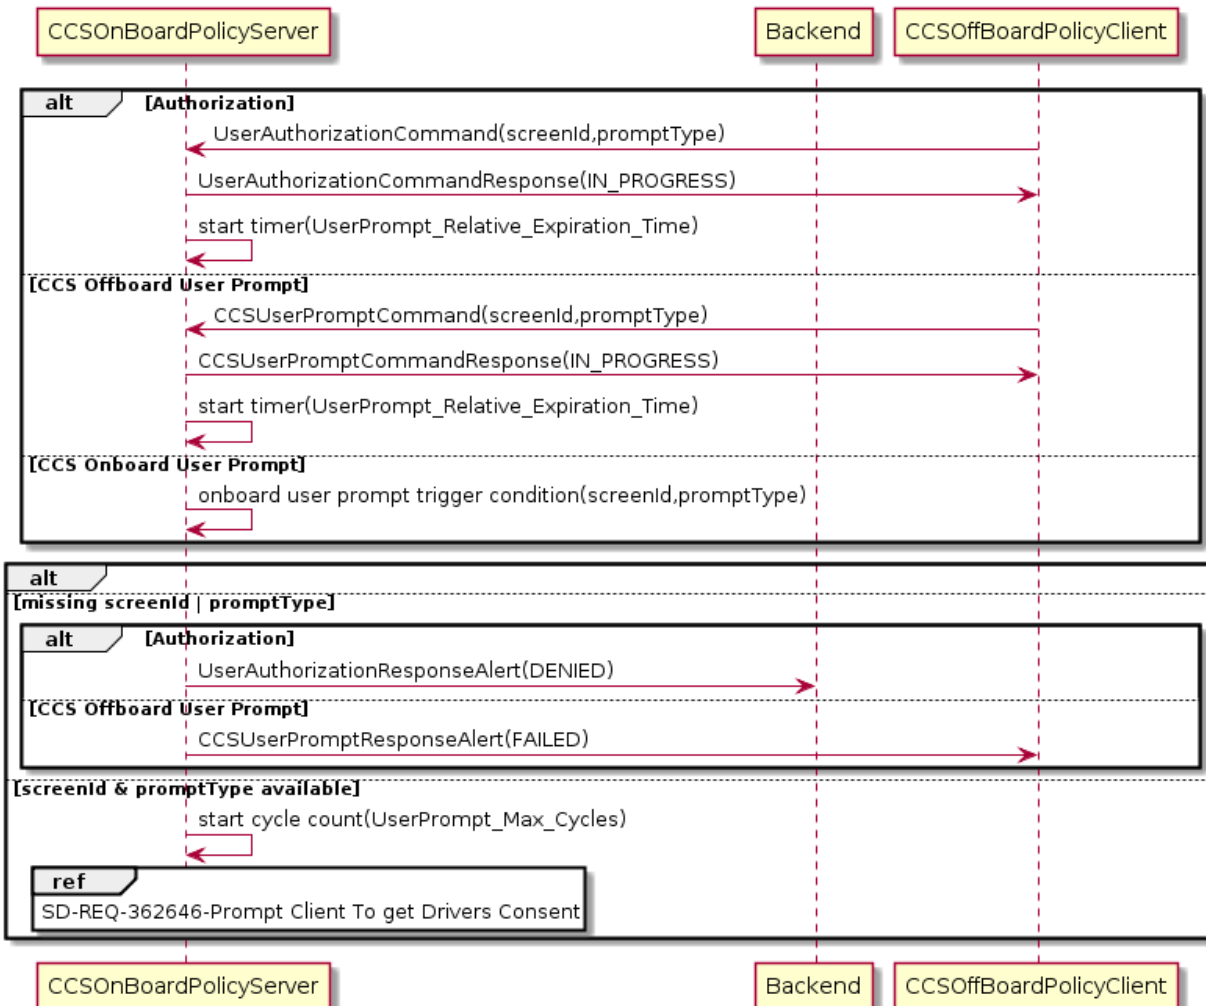
4.1.3.2 CCOIv2-SD-REQ-362646/A-Prompt Client To get Drivers Consent
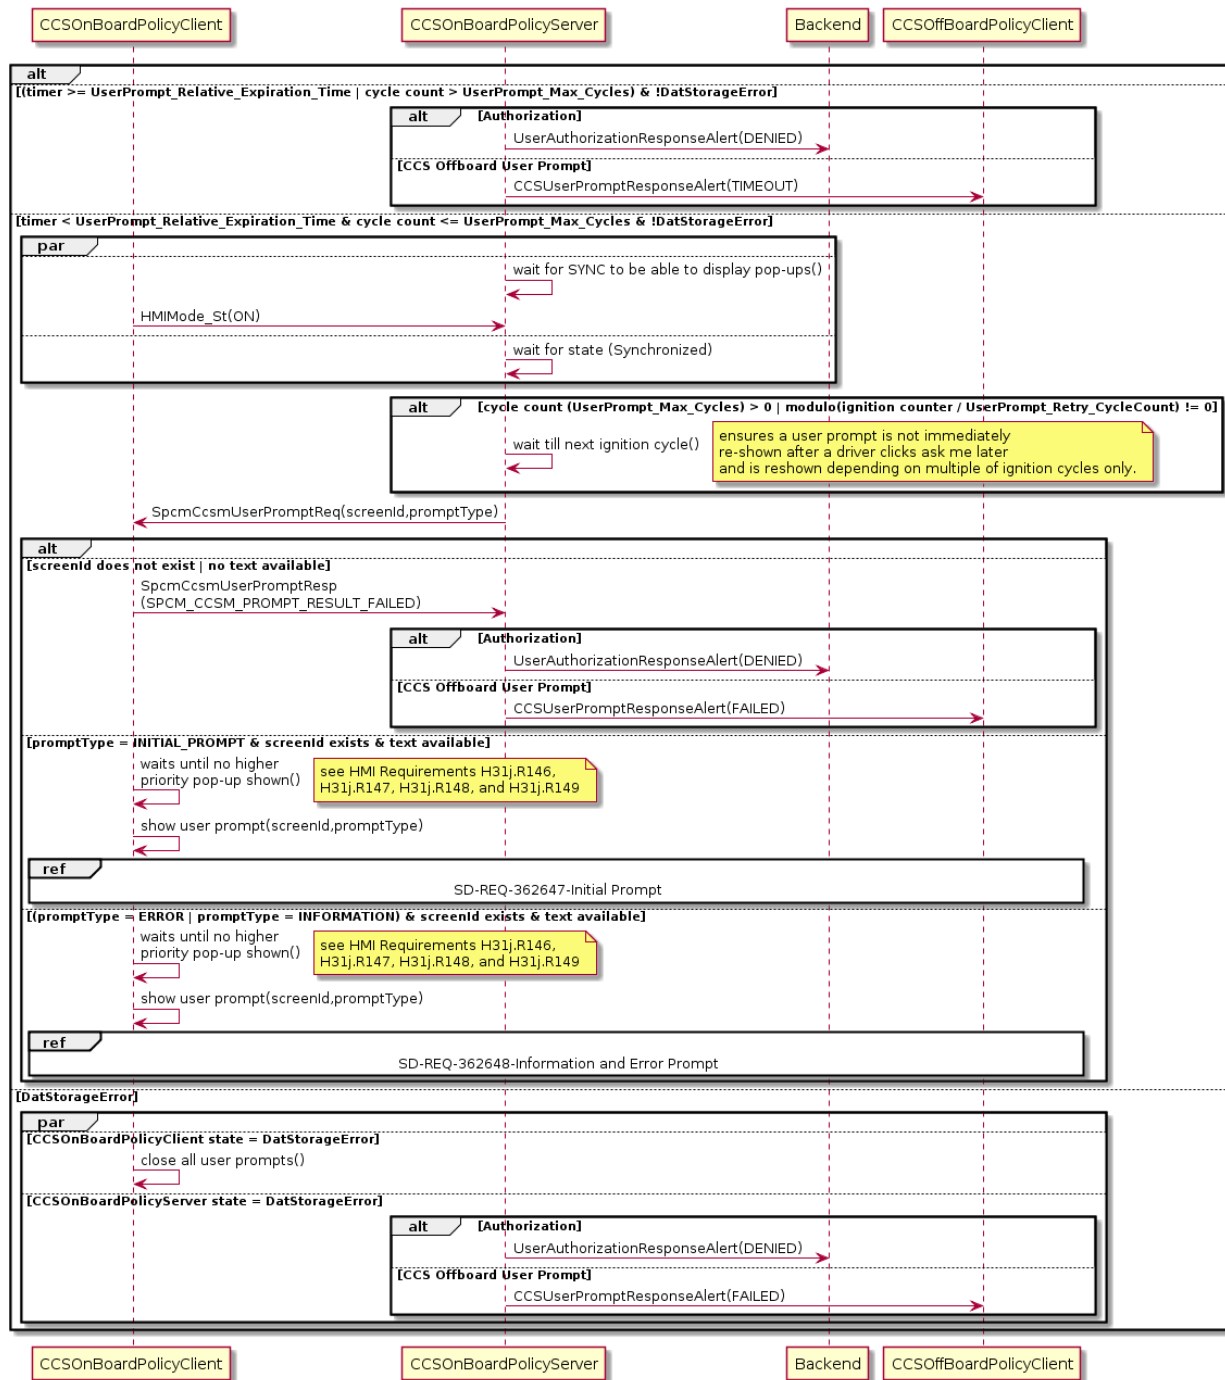
4.1.3.3 CCOIv2-SD-REQ-362647/B-Initial Prompt

FILE:CUSTOMER CONNECTIVITY SETTINGS
CLIENT APIM SPSS V1.5 APR 22, 2020.DOCX

FORD MOTOR COMPANY CONFIDENTIAL
The information contained in this document is Proprietary to Ford Motor Company.

Page 37 of 89
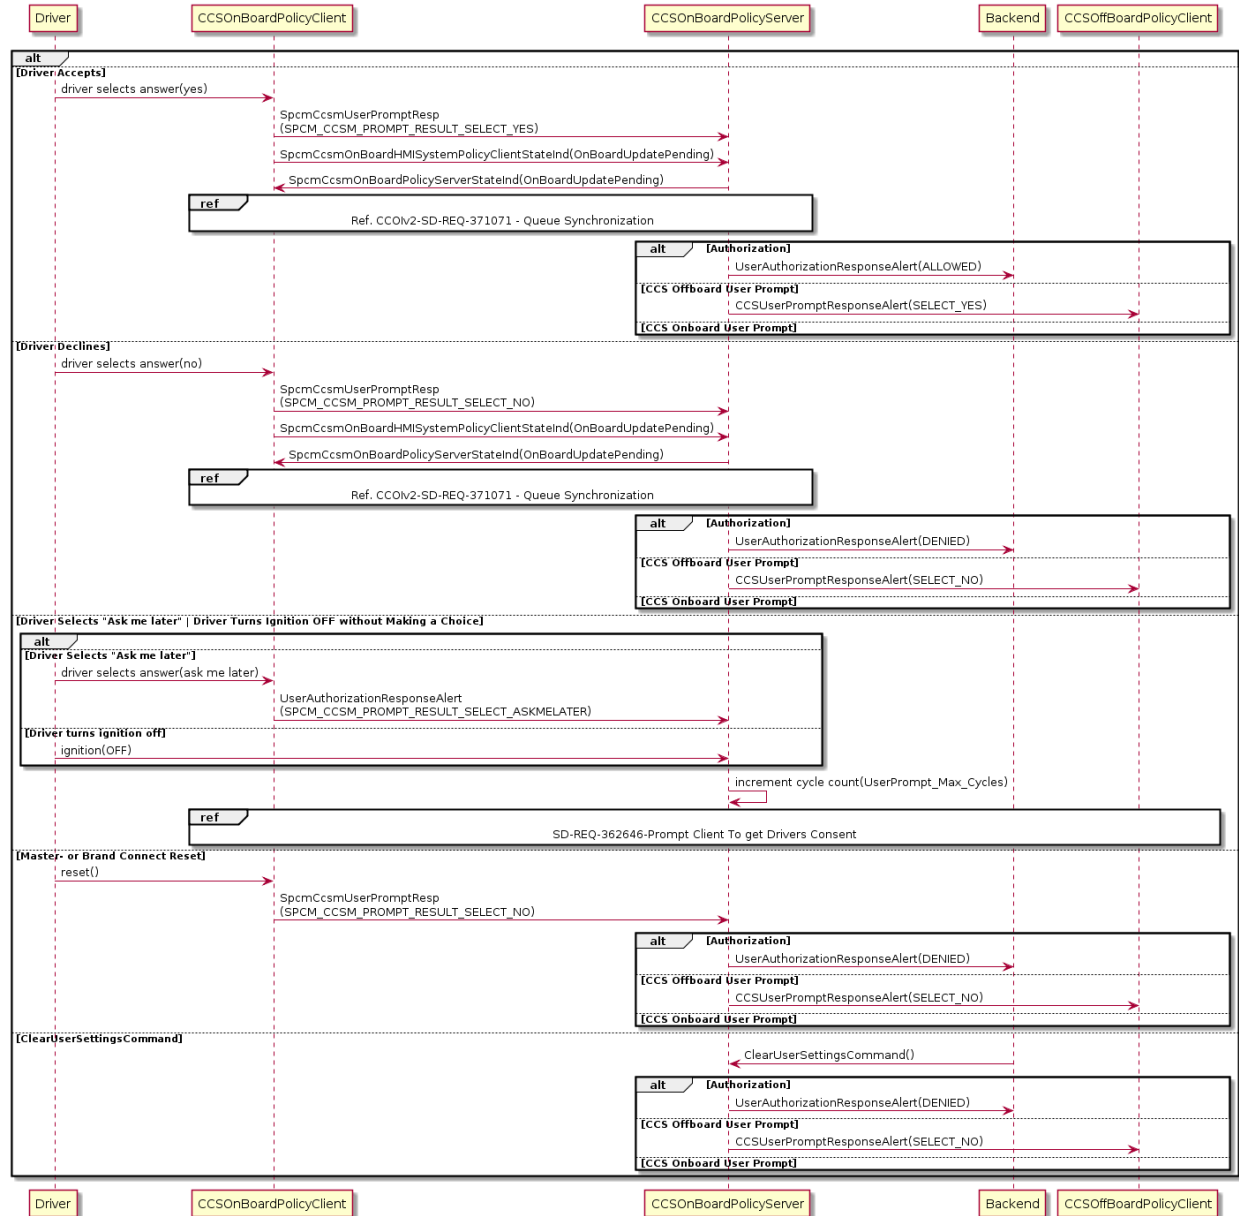
4.1.3.4 CCOIv2-SD-REQ-362648/B-Information and Error Prompt
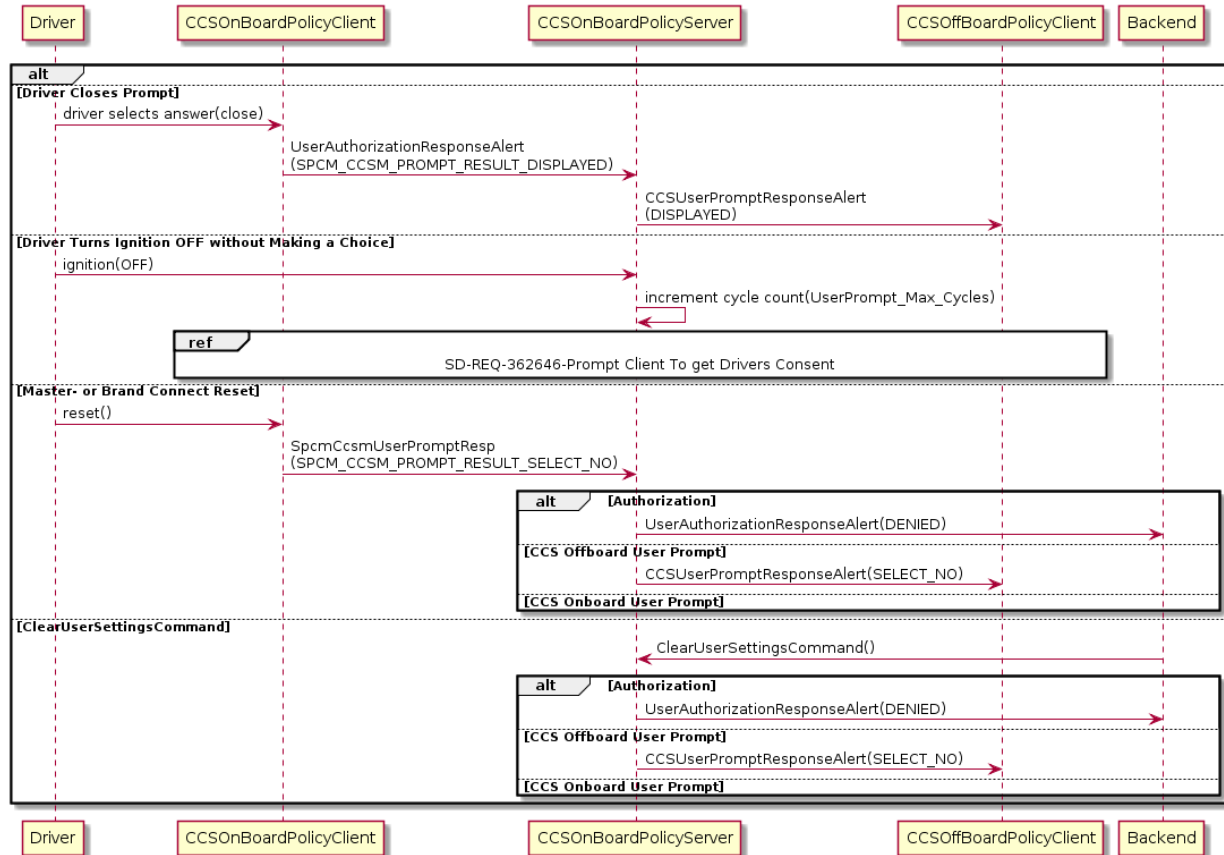
4.2 CCOIv2-FUN-REQ-317862/C-Error and local update prompt handling

4.2.1 Requirements

4.2.1.1 CCOIv2-REQ-317863/D-Error Pop-Up "Feature Unavailable"
If the following conditions are met

CCSOnboardPolicyClient is in state DataStorageError
AND
(the driver is in the Connected Vehicle Features menu OR the driver is attempting to enter the Connected Vehicle Features menu)

the CCSOnboardPolicyClient shall display the Error Messages Pop-Up 27 and populate its content with message code 9.

4.2.1.2 CCOIv2-REQ-317866/D-Local Update Pop-Up
If the following conditions are met

(CCSOnboardPolicyClient is not in state DataStorageError and is not in state Synchronized)
AND
(the driver is in the Connected Vehicle Features menu OR the driver is attempting to enter the Connected Vehicle Features menu)

the CCSOnboardPolicyClient shall display the Local Update Pop-Up 28.

4.2.1.3 CCOIv2-REQ-362636/A-Performance Requirements

4.2.1.3.1 CCOIv2-REQ-362637/A-Deadline to Inform Server about Setting Changes
Once a driver changes an entity setting by clicking the entity setting (REQ-296881-Switching entites on/off no consent prompt required per PTE) and confirming the prompt if applicable (REQ-296879-Entity toggle switch changed to "on", REQ-296880-Entity toggle switch changed to "off") the CCSOnBoardPolicyClient shall show the local update pop-up REQ-317866-Local Update Pop-Up within 250 ms of the change unless the CCSOnBoardPolicyServer already confirmed the updated settings via SpcmCcsmEntitySettingsUpdateInd.

4.3 CCOIv2-REQ-355042/A-OnBoardSynchronization (Client)

4.3.1 Use Cases

4.3.1.1 *CCOIv2-UCD-REQ-371112/A-Update Policy Files*

4.3.1.2 *CCOIv2-UC-REQ-357523/B-Turn ignition on*

Actors	Driver, CCS OnBoardPolicyServer, CCS OnBoardPolicyClient
Pre-conditions	Ignition Off, CCS OnBoardPolicyClient is turned off, CCS System is in state "Invalid"
Scenario Description	1. Driver turns on ignition 2. CCS OnBoardPolicyServer and CCS OnBoardPolicyClient start up 3. CCS OnBoardPolicyServer holds an update of PTE, CFM or SCF file or Entity Settings 4. CCS System transitions through OnboardDistributedStateMachine to state "Synchronizing" 5. CCS Server transmits new policy files and/or Entity Settings to CCS Client successfully 6. CCS Server and Client enter Synchronization state "Synchronized"
Post-conditions	Latest policy files and Entity Settings synchronized between CCS Server and CCS Client
List of Exception Use Cases	E1: 3a) CCS Server has no update of policy files compared to the meta data received via SynchronizationSession_Rq .1 CCS System transitions through OnboardDistributedStateMachine to "Synchronized" without policy file transfer

Interfaces	

4.3.1.3 CCOIv2-UC-REQ-362912/B-Turn HMI System on

Actors	Driver, CCS OnBoardPolicyServer, CCS OnBoardPolicyClient
Pre-conditions	Ignition Off, CCS OnBoardPolicyClient is turned off, CCS System is in state "Invalid"
Scenario Description	1. Driver turns OnBoardPolicyClient on while Ignition off 2. CCS OnBoardPolicyServer and CCS OnBoardPolicyClient start up 3. CCS OnBoardPolicyServer holds an update of PTE, CFM or SCF file or Entity Settings. 4. CCS System transitions through OnboardDistributedStateMachine to state "Synchronizing" 5. CCS Server transmits new policy files and/or Entity Settings to CCS Client successfully 6. CCS Server and Client enter Synchronization state "Synchronized"
Post-conditions	Latest policy files and Entity Settings synchronized between CCS Server and CCS Client
List of Exception Use Cases	E1: 3a) CCS Server has no update of policy files compared to the meta data received via SynchronizationSession_Rq .1 CCS System transitions through OnboardDistributedStateMachine to "Synchronized" without policy file transfer
Interfaces	

4.3.1.4 CCOIv2-UC-REQ-362282/B-Policy File or Entity Settings received from OffBoardPolicyClient

Actors	CCS OffBoardPolicyClient, CCS OnBoardPolicyServer, CCS OnBoardPolicyClient
Pre-conditions	CCS OnBoardPolicyServer and CCS OnBoardPolicyClient are running, CCS System is in state "Synchronized"
Scenario Description	1. CCS OnBoardPolicyServer receives a PTE, CFM or SCF file or Entity Settings via OffBoardSynchronization 2. CCS OnBoardPolicyServer completes Consistency Check successfully 3. CCS System transitions to "synchronizing" 4. CCS Server transmits new policy files and/or Entity Settings to CCS Client successfully 5. CCS Server and Client enter Synchronization state "Synchronized"
Post-conditions	Policy files and Entity Settings synchronized between CCS Server and CCS Client

List of Exception Use Cases	E1:
	2a) Consistency Check was not successful
	   .1 CCS Server does not initiate an OnBoardSynchronization
	
	E2:
	4a) Transmission failed
	   .1 CCS Server applies OnBoardSynchronization retry strategy

Interfaces	

4.3.1.5 CCOIv2-UC-REQ-357522/A-Revert to Default Policy File

Actors	Test Engineer, CCS OnBoardPolicyServer

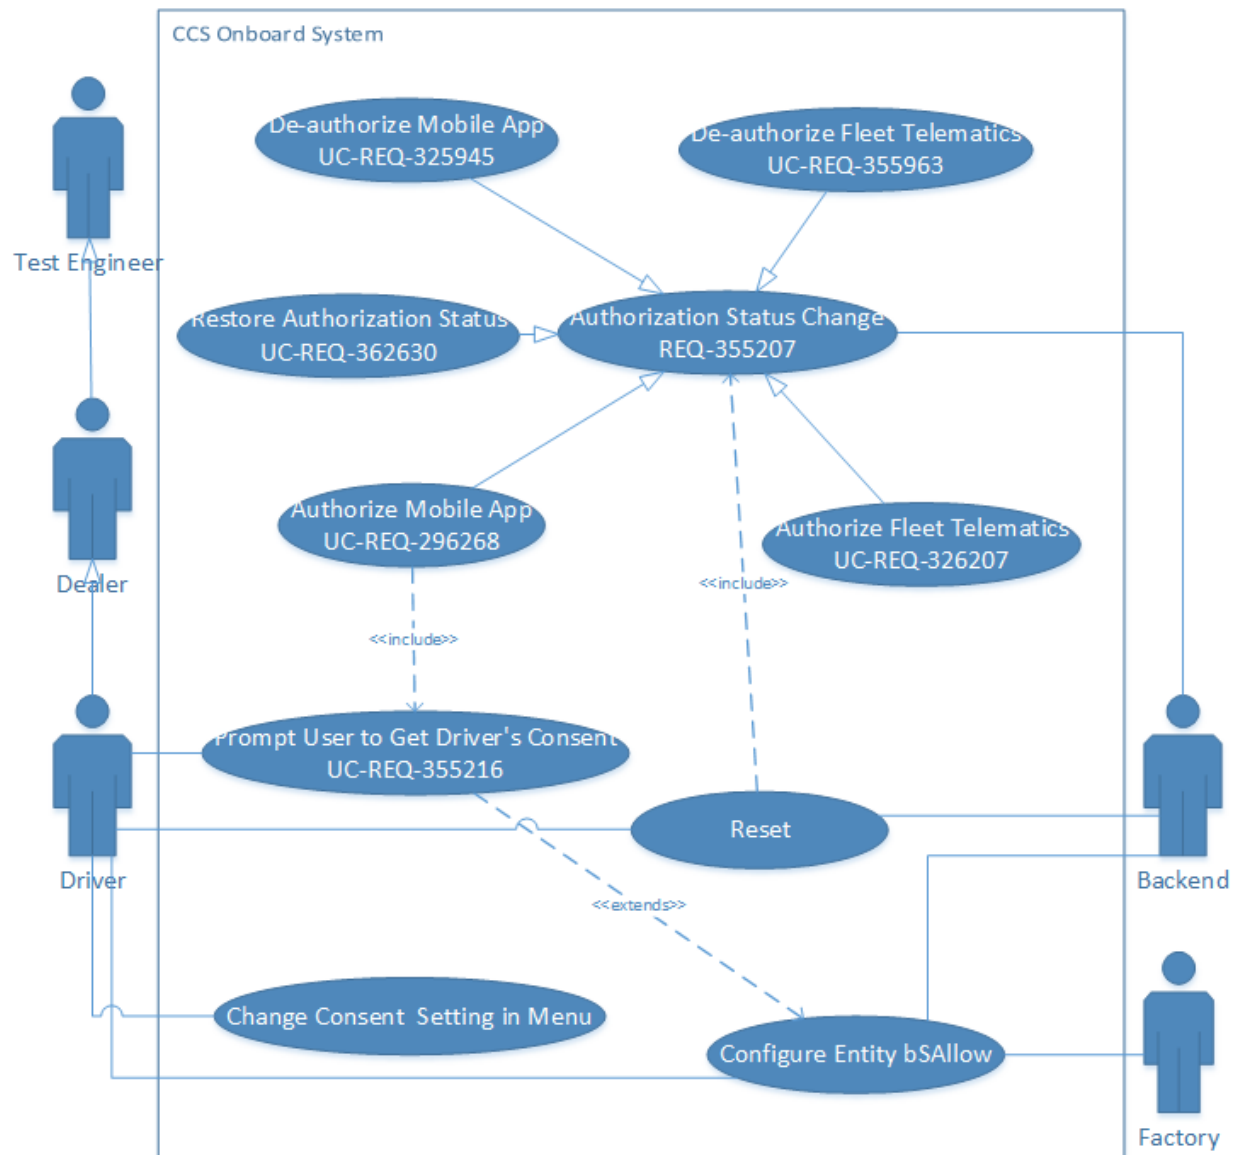| **Pre-conditions**	CCS OnBoardPolicyServer and CCS OnBoardPolicyClient are running, CCS System synchronized with Custom Policy File for testing
Scenario Description	1. Test Engineer reverts to default Policy File on CCS OnBoardPolicyServer with development tool 2. CCS OnBoardPolicyServer initiates Synchronization with default policy file
Post-conditions	CCS System synchronized with default Policy File
List of Exception Use Cases	
Interfaces	

4.3.1.6 CCOIv2-UC-REQ-357525/C-Software Update

Actors	Dealer, Backend, CCS OnBoardPolicyServer
Pre-conditions	CCS OnBoardPolicyServer and CCS OnBoardPolicyClient are running, CCS System synchronized
Scenario Description	1. Dealer or Backend initiates module software update 2. CCS System remains in its current Synchronization state 3. Software update completes. Only with next Ignition Cylce, the Software Update becomes effective. 4. With the Start Up Synchronizations Process of next Ignition Cylce, CCS System transitions through OnboardDistributedStateMachine to state "Synchronizing" 5. CCS Server transmits new policy files and Entity Settings to CCS Client successfully 6. CCS Server and Client enter Synchronization state "Synchronized"
Post-conditions	Latest policy files and Entity Settings synchronized between CCS Server and CCS Client
List of Exception Use Cases	5a. CCS Server has no update of policy files compared to the meta data received via SynchronizationSession_Rq .1 CCS System transitions through OnboardDistributedStateMachine to "Synchronized" without policy file transfer
Interfaces	

4.3.1.7 CCOIv2-UC-REQ-362320/B-Subscription Change while OnBoardSynchronization

Actors	Backend, CCS OnBoardPolicyServer, CCS OnBoardPolicyClient
Pre-conditions	CCS OnBoardPolicyServer and CCS OnBoardPolicyClient are running, CCS System synchronized
Scenario Description	1. During an OnBoardSynchronization (a), the CCS OnBoardPolicyServer receives another trigger for OnBoardSynchronization (b) 2. The ongoing OnBoardSynchronization (a) completes 3. The received OnBoardSynchronization (b) starts
Post-conditions	All updates have been synchronized
List of Exception Use Cases	
Interfaces	

4.3.1.8 CCOIv2-UCD-REQ-361932/B-Update Entity Settings

CCS Onboard System

Test Engineer

Dealer

Driver

De-authorize Mobile App
UC-REQ-325945

De-authorize Fleet Telematics
UC-REQ-355963

Restore Authorization Status
UC-REQ-362630

Authorization Status Change
REQ-355207

Authorize Mobile App
UC-REQ-296268

Authorize Fleet Telematics
UC-REQ-326207

<<include>>

<<include>>

Prompt User to Get Driver's Consent
UC-REQ-355216

Reset

Backend

<<extends>>

Change Consent Setting in Menu

Configure Entity bSAllow

Factory

4.3.1.9 CCOIv2-UC-REQ-355218/B-Change Consent Setting in Menu

Actors	Driver, Dealer, Test Engineer, CCSOffBoardPolicyClient, CCSOnBoardPolicyServer
Pre-conditions	CCSServerEntitySettingsStatus is in status EntitiesReady
Scenario Description	1. Driver, Dealer, or Test Engineer navigates to the CCS menu 2. Driver, Dealer, or Test Engineer clicks on a toggle switch to change the consent for a CCS entity 3. Driver, Dealer, or Test Engineer accepts the confirmation prompt 4. CCSOnboardPolicyClient requests a settings update for this entity with the CCSOnboardPolicyServer 5. CCSOnBoardPolicyServer peforms an onbord synchronization
Post-conditions	-

List of Exception Use Cases	E1:
	1a) Menu is not accessible to do Local Update Pop-Up or Feature Unavailable pop-up
	
	E2:
	2a) Changing consent not possible when switch is not changeable (REQ-296876)
	    .1 skip the rest of the steps
	
	E3:
	3a) Driver, Dealer, or Test Engineer declines the confirmation prompt or turns ignition OFF without accepting the prompt
	    .1 skip the rest of the steps

	E4: 3a) There is no confirmation prompt for this entity defined in REQ-328983-Missing content strategy .1 skip step 3
Interfaces	

4.3.1.10 CCOIv2-UC-REQ-355186/A-Configure CCS Communication Data

Actors	Backend, VSCS, Dealer, Test Engineer
Pre-conditions	-
Scenario Description	1. Backend, VSCS, Dealer or a Test Engineer writes the method 2 parameters for the CCS Communication Data
Post-conditions	The next time the CCSOnboardPolicyServer starts a entity setting update synchronization with the CCSOnboardPolicyClient the CCSOnboardPolicyServer applies the newly added CCS Communication Data from step 1
List of Exception Use Cases	-
Interfaces	

4.3.1.11 CCOIv2-UC-REQ-355202/B-Configure Entity bSAllow

Actors	Test Engineer, VSCS, Backend, Driver, CCSOnBoardPolicyServer
Pre-conditions	-
Scenario Description	1. Backend, VSCS, or Test Engineer change the subscription (bSAllow) bit for one or many entities in the vehicle configuration 2. CCSOnboardPolicyServer changes the entity subscription bit according to step 1 on the CCSOnboardPolicyServer 3. CCSOnBoardPolicyServer performs an onboard synchronization
Post-conditions	-
List of Exception Use Cases	E2: 2a) If the apply mode is delayed, change the subscription bit on next ignition on per Ford Telematics Communication Protocol Specification.
Interfaces	

4.3.1.12 CCOIv2-UC-REQ-355203/B-Configure Entity bPAllow

Actors	Test Engineer, Dealer, VSCS, CCSOffBoardPolicyClient, Driver, CCSOnBoardPolicyServer
Pre-conditions	-
Scenario Description	1. CCSOffBoardPolicyClient, VSCS, Dealer or Test Engineer change the vehicle capability (bPAllow) bit for one or many entities in the vehicle configuration 2. CCSOnboardPolicyServer changes the entity capability bit according to step 1 on the CCSOnboardPolicyServer 3. CCSOnBoardPolicyServer performs an onboard synchronization
Post-conditions	-
List of Exception Use Cases	E1: 2a) If the apply mode is delayed, change the capability bit on next ignition on per Ford Telematics Communication Protocol Specification.

Interfaces	

4.3.1.13 CCOIv2-UC-REQ-355208/B-Reset

Actors	Backend, Driver, Dealer, Test Engineer, CCSOnboardPolicyServer, CCSOnboardPolicyClient
Pre-conditions	-
Scenario Description	1. Driver, Dealer, or Test Engineer performs a master reset or brand connect reset 2. CCSOnboardPolicyServer resets the entities to their default values 3. CCSOnBoardPolicyServer performs an onboard synchronziation
Post-conditions	-

List of Exception Use Cases	E1:
	1b) Backend sends a Clear User Settings Command
	    .1 proceed with step 2 of the Scenario Description
	
	E2:
	4a) The vehicle was authorized before the master reset (bAllow for entity "Authorized" ID 3, Type 0 is enabled)
	    .1 Continue with REQ-355207 Authorization Status Change (CCS OnBoardPolicyServer)

Interfaces	

4.3.1.14 CCOIv2-UC-REQ-355201/B-Provisioning

Actors	Dealer, Test Engineer, Factory, CCSOnboardPolicyServer, CCSOnboardPolicyClient
Pre-conditions	Vehicle is in un-provisioned state
Scenario Description	1. Dealer, Test Engineer, or Factory puts the vehicle in provisioned state 2. CCSOnboardPolicyServer sets the default CCS entity settings 3. CCSOnBoardPolicyServer performs an onboard synchronization 4. Continue with use case REQ-355223 Query on Provisioning (CCS OnBoardPolicyServer)
Post-conditions	-
List of Exception Use Cases	-
Interfaces	

4.3.1.15 CCOIv2-UC-REQ-355204/B-Change Lifecycle Mode

Actors	Dealer, Test Engineer, Factory, CCSOnBoardPolicyServer
Pre-conditions	-
Scenario Description	1. Dealer, Test Engineer, or Factory changes the vehicle's life cycle mode 2. CCSOnboardPolicyServer sets the default CCS entity settings 3. CCSOnBoardPolicyServer performs an onboard synchronization
Post-conditions	The vehicle uses the CCS default entity settings
List of Exception Use Cases	-
Interfaces	

4.3.1.16 CCOIv2-UC-REQ-355206/A-ECG Swap

Actors	Dealer, Test Engineer
Pre-conditions	-
Scenario Description	1. Dealer or Test Engineer inhale all method 2 parameters from old module (including bSAllow and bPAllow entity bits as well as CCS Communication Data) 2. Dealer or Test Engineer replace the ECG module with a another ECG module 3. Dealer or Test Engineer exhale all method 2 parameters to new module (including bSAllow and bPAllow entity bits as well as CCS Communication Data) 4. Continue with use case REQ-355201 Provisioning
Post-conditions	-

List of Exception Use Cases	E1:
	 1a) Inhale not possible
	    .1 the Dealer or Test Engineer does a reconstruction of the method 2 parameters from the end of line configuration and subscription parameters in the backend
	    .2 continue with step 2. of the Scenario Description
	    .3 the Dealer or Test Engineer uses the reconstructed method 2 parameters from above for step 3. of the Scenario Description
	    .4 continue with step 4. of the Scenario Description

Interfaces	

4.3.1.17 CCOIv2-UC-REQ-355212/B-Restore bUAllow Entity Settings

Actors	CCSOnBoardPolicyServer, CCSOnboardPolicyClient, CCSOffBoardPolicyClient
Pre-conditions	1. CCSOnBoardPolicyServer received valid setting update in REQ-355220 Query on Ignition Cycle
Scenario Description	1. CCSOnBoardPolicyServer changes bUAllow entity settings 2. CCSOnBoardPolicyServer performs an onboard synchronization
Post-conditions	CCSOnBoardPolicyServer has restored the settings form the CCSOffBoardPolicyClient.
List of Exception Use Cases	
Interfaces	

4.3.1.18 CCOIv2-UC-REQ-355205/A-Hard Reset

Actors	Dealer, Test Engineer
Pre-conditions	-
Scenario Description	1. Dealer or Test Engineer perform a diagnostic hard reset
Post-conditions	CCS entity settings remain the same
List of Exception Use Cases	-
Interfaces	

4.3.1.19 CCOIv2-UC-REQ-362905/A-Update Software

Actors	Dealer, Test Engineer, Backend

Pre-conditions	-
Scenario Description	1. Dealer, Test Engineer, or Backend install a software update on the vehicle
Post-conditions	CCS entity settings remain the same
List of Exception Use Cases	-
Interfaces	

4.3.1.20 CCOIv2-UC-REQ-355215/A-Re-connect Battery

Actors	Dealer, Test Engineer, Driver
Pre-conditions	-
Scenario Description	1. Dealer, Test Engineer, or Driver disconnects the vehicle's battery
	2. Dealer, Test Engineer, or Driver reconnects the vehicle's battery
Post-conditions	CCS entity settings remain the same
List of Exception Use Cases	-
Interfaces	

4.3.2 Requirements (Client)

4.3.2.1 CCOIv2-REQ-354018/A-OnBoardHMISystemPolicyClient Synchronization State Transitions

For running the distributed state machine, the OnBoardPolicyServer and the OnBoardPolicyClient may lead each other into entering a new state.

Each endpoint may signal this new state, and the onboard system state is assumed to be entered, once both endpoints signal this state. The table below depicts the combinations that may occur. Upon an "entered state(...)" operation in the sequence diagrams, it is assumed that the operation waits until the other end has acknowledged this state, or a configurable timeout occurred.

OnBoardPolicyClient_St In State	Trigger and Guard	OnBoardPolicyClient_St Transitions to and Transmits New State
Invalid	OnBoardPolicyClient is (re-)started	Waiting
Waiting	OnBoardPolicyClient initialized, Consistency Check performed (REQ-362371) AND OnBoardPolicyServer_St == SynchronizationNeeded	SynchronizationNeeded
Waiting	OnBoardPolicyServer_St == DataStorageError	DataStorageError
SynchronizationNeeded	OnBoardPolicyServer_St == Synchronizing	Synchronizing
Synchronizing	OnBoardPolicyServer_St == Synchronized	Synchronized
Synchronizing	Hash comparison failed (REQ-358309) OR OnBoardPolicyServer_St == SynchronizationFailed	SynchronizationFailed

OnBoardPolicyClient_St In State	Trigger and Guard	OnBoardPolicyClient_St Transitions to and Transmits New State
SynchronizationFailed	OnBoardPolicyServer_St == SynchronizationNeeded	SynchronizationNeeded
Any of {Waiting, DataStorageError, OnBoardUpdatePending, OffBoardUpdatePending, SynchronizationNeeded, Synchronizing, SynchronizationFailed, Synchronized}	OnBoardPolicyServer_St == OnBoardDistributed StateMachine Inconsistent	OnBoardDistributed StateMachine Inconsistent
OnBoardDistributed StateMachine Inconsistent OR DataStorageError	OnBoardPolicyServer_St == Waiting	Waiting
Any of {Waiting, DataStorageError, OnBoardUpdatePending, OffBoardUpdatePending, SynchronizationNeeded, Synchronizing, SynchronizationFailed, Synchronized, OnBoardDistributed StateMachine Inconsistent}	OnBoardPolicyServer_St == Unrecoverable SynchronizationError	UnrecoverableSynchronizationError
Synchronized	Driver changes an Entity Setting in menu OR Driver selects "YES" or "NO" in initialPrompt	OnBoardUpdatePending
OnBoardUpdatePending	Driver declines Consent Prompt in menu	Synchronized
OnBoardUpdatePending	OnBoardPolicyServer_St == SynchronizationNeeded	SynchronizationNeeded
Synchronized	OnBoardPolicyServer_St == OffBoardUpdatePending	OffBoardUpdatePending
OffBoardUpdatePending	OnBoardPolicyServer_St == SynchronizationNeeded	SynchronizationNeeded
Any of {DataStorageError, OnBoardUpdatePending, OffBoardUpdatePending, SynchronizationNeeded, Synchronizing, SynchronizationFailed, Synchronized, OnBoardDistributed StateMachine Inconsistent}	OnBoardPolicyServer_St == Invalid OR OnBoardPolicyServer_St signal missing	Waiting
Any state	OnBoardPolicyClient shutting down	Invalid

Table 7 – State Transition Table

4.3.2.1.1 CCOIv2-REQ-362524/B-Invalid to Waiting

CCS OnBoardPolicyClient shall transition from Invalid into the Waiting state every time the implementing part starts up.

4.3.2.1.2   CCOlv2-REQ-362525/B-Any to Invalid

If the driver turns off ignition CCS OnBoardPolicyClient shall transition from any state to state „Invalid".

4.3.2.1.3   CCOlv2-REQ-359108/B-Client Hash Check in State Synchronizing

Once CCS OnBoardPolicyClient receives SpcmCcsmSynchronizationSessionResp in state "Synchronizing" and new policy files are contained, CCS OnBoardPolicyClient shall decompress, calculate the hash for any of the received policy files:

4.3.2.1.3.1   CCOlv2-REQ-358309/A-Hash Value mismatch

If any of the calculated hash values does not match to the received hash values, CCS OnBoardPolicyClient shall transition to state „SynchronizationFailed".

4.3.2.1.3.2   CCOlv2-REQ-358466/B-Hash Value match

If all calculated hash values match to the received hash values, CCS OnBoardPolicyClient shall:
- Store the received policy files including meta data in the persistent storage
- Send a SpcmCcsmSynchronizationSummaryReportInd, with Meta Data of the files as stored in the persistent storage, to CCS OnBoardPolicyServer.

4.3.2.1.3.3   CCOlv2-REQ-371111/A-No Hash Comparison Needed

If no new policy files are contained in SpcmCcsmSynchronizationSessionResp, no hash calculation is required and CCS OnBoardPolicyClient shall send a SpcmCcsmSynchronizationSummaryReportInd, with Meta Data of the files as previously stored in the persistent storage, to CCS OnBoardPolicyServer.

4.3.2.2   CCOIv2-REQ-377210/A-CCSOnBoardPolicyClient Synchronization Heartbeat Signal

The CCSOnBoardPolicyClient shall periodically publish a heartbeat signal (SpcmCcsmOnBoardHMISystemPolicyClientStateInd) with the current synchronization state.

4.3.2.3   CCOIv2-REQ-359109/B-SynchronizationSessionRequest

Once the OnBoardDistributedStateMachine reached state „SynchronizationNeeded", CCS OnBoardPolicyClient shall send the meta data of the PTE and CFM policy files stored in the persistent storage to CCS OnBoardPolicyServer via SpcmCcsmSynchronizationSessionReq.

4.3.2.4   CCOIv2-REQ-362526/A-Application of synchronized Policy Files

OnBoardPolicyClient shall only parse new PTE or CFM policy files, after CCS OnBoardPolicyClient entered state „Synchronized".

4.3.2.5   CCOIv2-REQ-362811/B-Driver Changes a Setting in Menu

If a driver attempts to change a setting in the CCS menu, the CCSOnBoardPolicyClient shall transition to the state OnBoardUpdatePending.

4.3.2.5.1   CCOlv2-REQ-296879/E-Entity toggle switch changed to "on"

If the driver toggles an entity switch from off to on and the driver has accepted the consent prompt, if applicable (see REQ-328983-Missing content strategy) the CCSOnboardPolicyClient shall send a SpcmCcsmSettingsUpdateInd to the CCSOnboardPolicyServer to set the bUAllow bit of the corresponding entity to True.
If a driver does not accept the consent prompt, the CCSOnboardPolicyClient shall not send a SpcmCcsmSettingsUpdateInd and transition to state "synchronized".

4.3.2.5.2   CCOlv2-REQ-296880/E-Entity toggle switch changed to "off"

If the driver toggles an entity switch from on to off and the driver has accepted the consent prompt, if applicable (see REQ-328983-Missing content strategy) the CCSOnboardPolicyClient shall send a SpcmCcsmSettingsUpdateInd to the CCSOnboardPolicyServer to set the bUAllow bit of the corresponding entity to False.
If a driver does not accept the consent prompt, the CCSOnboardPolicyClient shall not send a SpcmCcsmSettingsUpdateInd and transition to state "synchronized".

4.3.2.5.3   CCOIv2-REQ-296881/B-Switching entites on/off no consent prompt required per PTE

If the driver toggles an entity switch from off to on (on to off) and the corresponding consent prompt messageCode is empty or "NULL" (see REQ-328983-Missing content strategy) the CCSOnboardPolicyClient shall send a SpcmCcsmSettingsUpdateInd to the CCSOnboardPolicyServer to set the bUAllow bit of the corresponding entity to True (False).

4.3.2.6   CCOIv2-REQ-362641/A-Store Server Entity Settings on Client: Server updated A CCS Entity

When the CCSOnBoardPolicyClient receives the SpcmCcsmEntitySettingsUpdateInd from the CCSOnBoardPolicyServer, the CCSOnBoardPolicyClient shall store the received entity settings.
- If the CCSOnBoardPolicyClient stored the settings, the CCSOnBoardPolicyClient shall send a SpcmCcsmEntitySettingsUpdateResp to the CCSOnBoardPolicyServer as Success with ECU ID SYNC=0x7D0.
- If the CCSOnBoardPolicyClient was not able to store the settings, the CCSOnBoardPolicyClient shall send a SpcmCcsmEntitySettingsUpdateResp to the CCSOnBoardPolicyServer as Failure with ECU ID SYNC=0x7D0.

Rationale: All CCS clients should store the CCS settings locally to be able to answer setting read requests from applications on the client's module.

4.3.2.7   CCOIv2-REQ-362817/A-Inform Features about Entity Setting Changes

If the CCSOnBoardPolicyClient receives CCS entity setting changes from the CCSOnBoardPolicyServer (REQ-362640-Store Server Entity Settings on Client: Client Starts-up, REQ-362641-Store Server Entity Settings on Client: Server updated A CCS Entity) the CCSOnBoardPolicyClient shall inform CCSOnBoardPolicyClient features about the updated entity setting changes.

4.3.2.8   CCOIv2-REQ-362818/A-Provide Entity Settings Information on Request

If the CCSOnBoardPolicyClient receives a read request to read CCS entity settings from a CCSOnBoardPolicyClient feature the CCSOnBoardPolicyClient shall respond with the corresponding CCS entity settings.

4.3.3 Activity Diagrams

4.3.3.1 CCOIv2-ACT-REQ-362528/C-OnBoardSynchronization

4.3.4 State Machine Diagrams

4.3.4.1 CCOIv2-STM-REQ-358305/C-OnBoardSynchronization

4.3.5 Sequence Diagrams

4.3.5.1 *CCOIv2-SD-REQ-358303/B-Power On Sequence*

4.3.5.2 *CCOIv2-SD-REQ-358304/C-Synchronization*

CCSOnBoardPolicyServer   CCSOnBoardPolicyClient

CCOIv2-SD-REQ-361332 - SynchronizationFailed
CCOIv2-SD-REQ-371071 - Queue Synchronization

SpcmCcsmOnBoardPolicyServerStateInd(SynchronizationNeeded)
SpcmCcsmOnBoardHMISystemPolicyClientStateInd(SynchronizationNeeded)
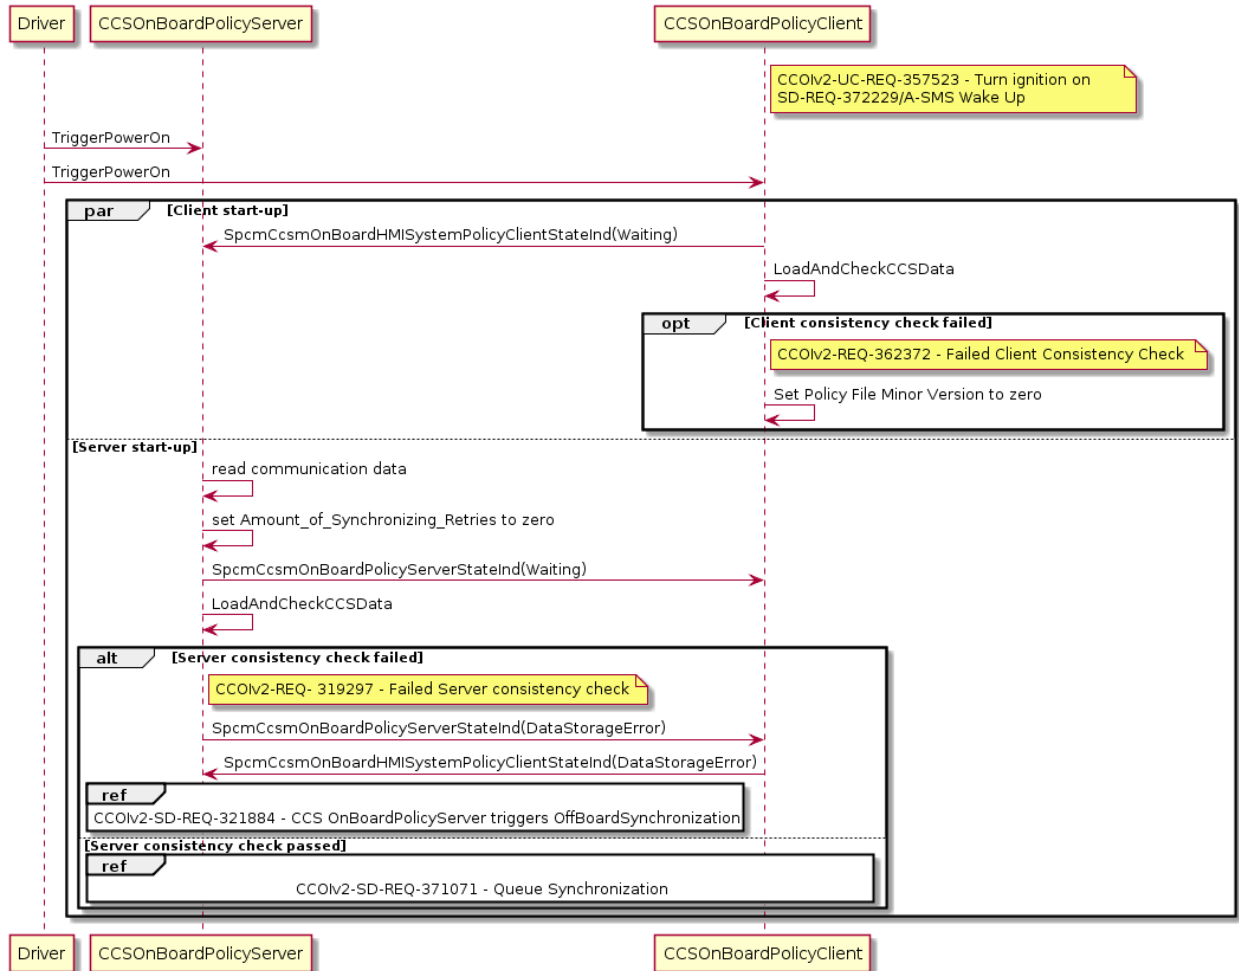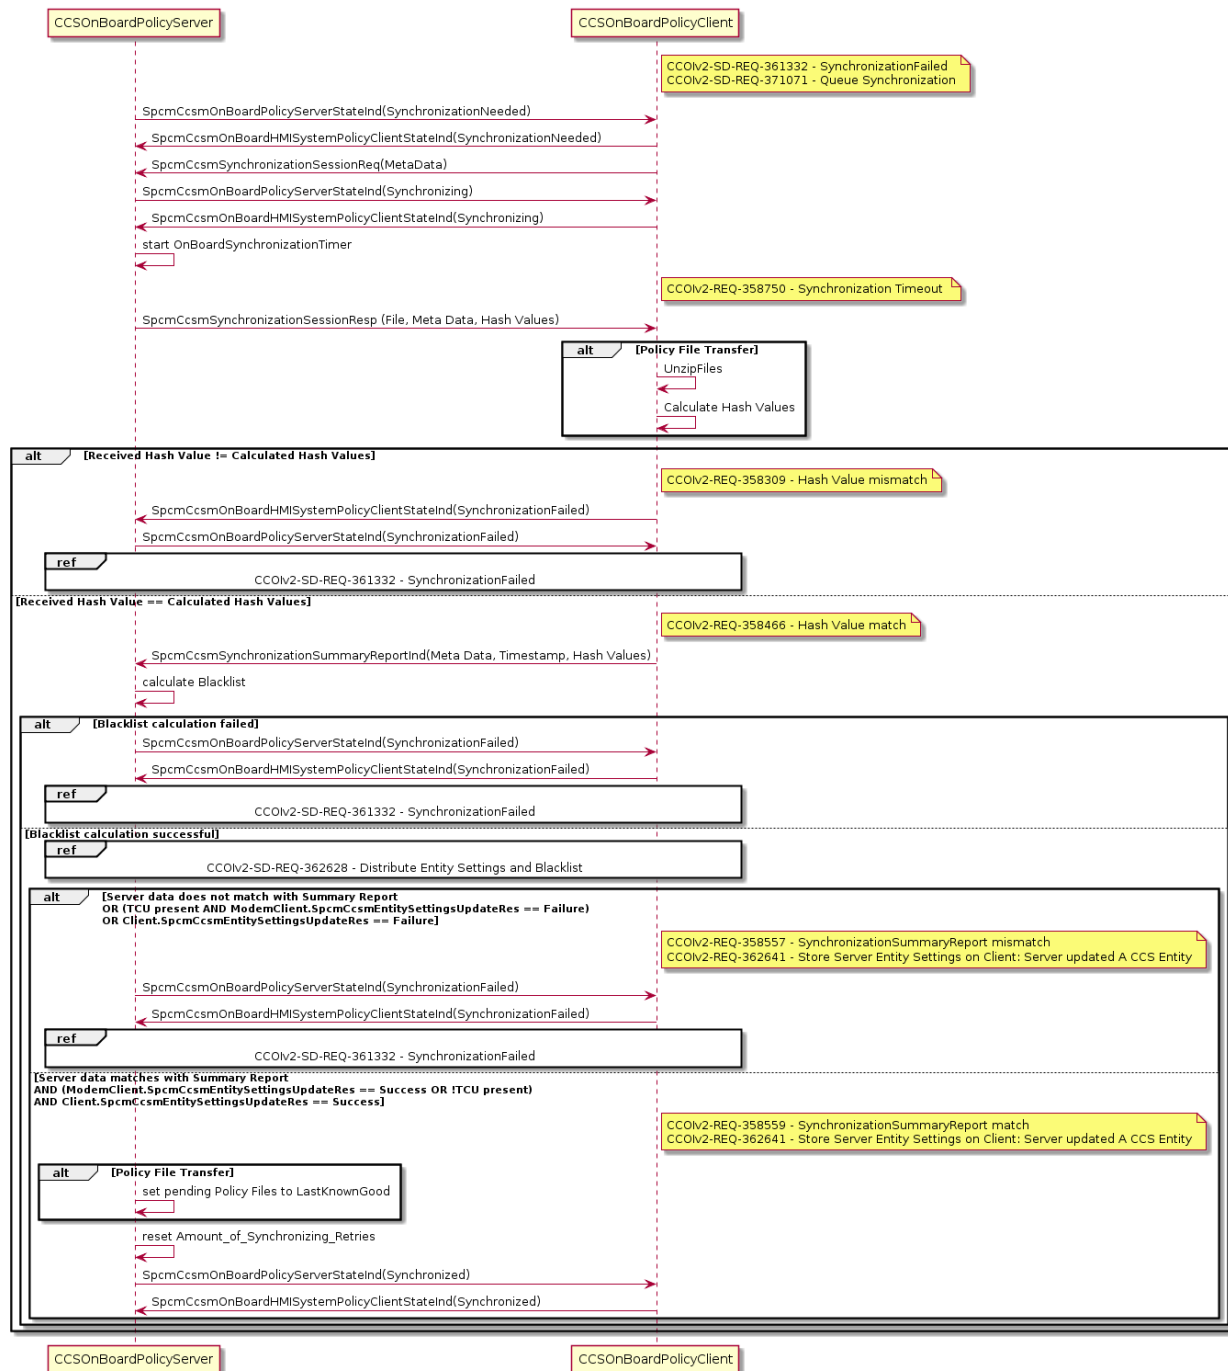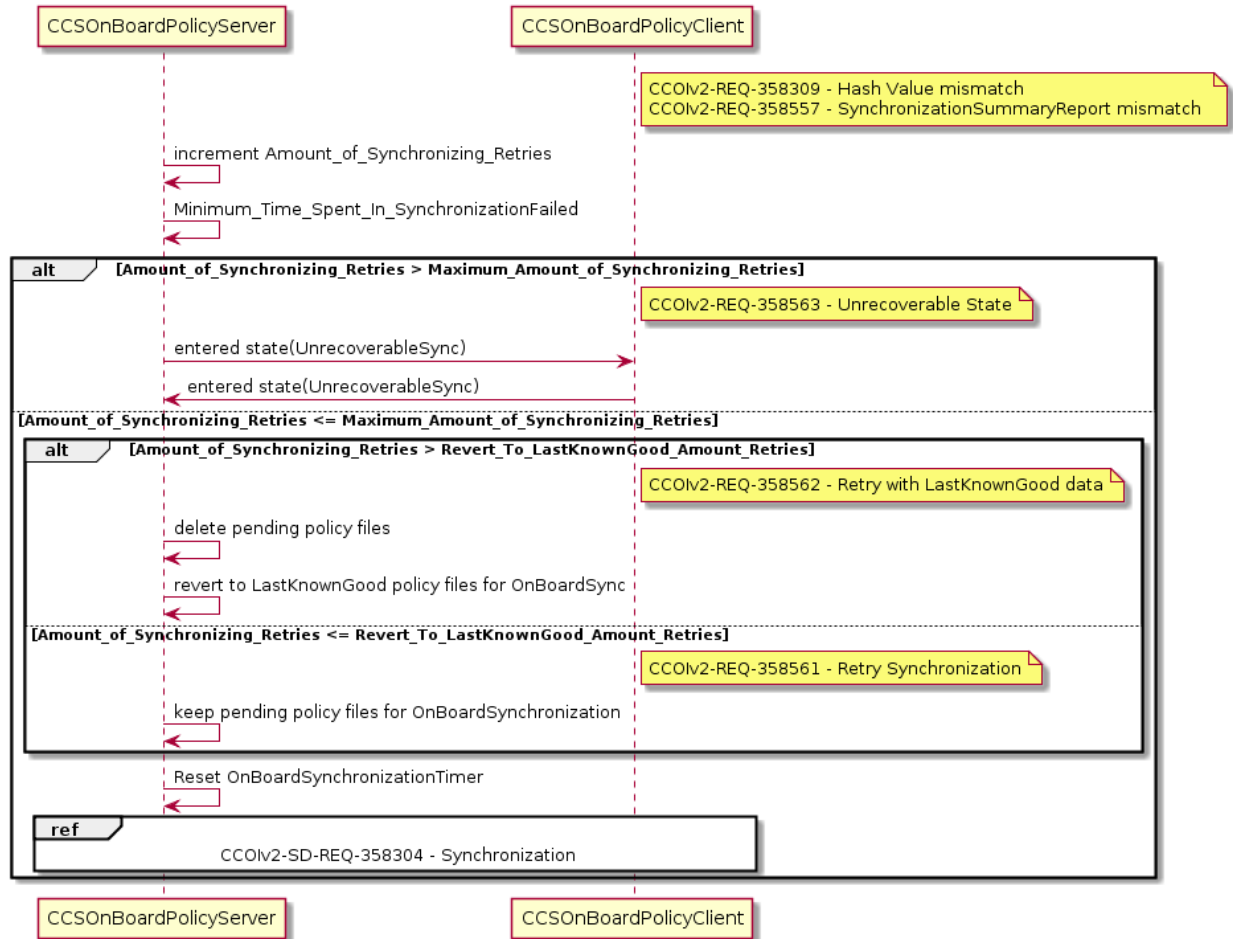SpcmCcsmSynchronizationSessionReq(MetaData)
SpcmCcsmOnBoardPolicyServerStateInd(Synchronizing)
SpcmCcsmOnBoardHMISystemPolicyClientStateInd(Synchronizing)
start OnBoardSynchronizationTimer

CCOIv2-REQ-358750 - Synchronization Timeout

SpcmCcsmSynchronizationSessionResp (File, Meta Data, Hash Values)

alt [Policy File Transfer]
   UnzipFiles
   Calculate Hash Values

alt [Received Hash Value != Calculated Hash Values]

CCOIv2-REQ-358309 - Hash Value mismatch

SpcmCcsmOnBoardHMISystemPolicyClientStateInd(SynchronizationFailed)
SpcmCcsmOnBoardPolicyServerStateInd(SynchronizationFailed)

ref CCOIv2-SD-REQ-361332 - SynchronizationFailed

[Received Hash Value == Calculated Hash Values]

CCOIv2-REQ-358466 - Hash Value match

SpcmCcsmSynchronizationSummaryReportInd(Meta Data, Timestamp, Hash Values)
calculate Blacklist

alt [Blacklist calculation failed]

SpcmCcsmOnBoardPolicyServerStateInd(SynchronizationFailed)
SpcmCcsmOnBoardHMISystemPolicyClientStateInd(SynchronizationFailed)

ref CCOIv2-SD-REQ-361332 - SynchronizationFailed

[Blacklist calculation successful]

ref CCOIv2-SD-REQ-362628 - Distribute Entity Settings and Blacklist

alt [Server data does not match with Summary Report
OR (TCU present AND ModemClient.SpcmCcsmEntitySettingsUpdateRes == Failure)
OR Client.SpcmCcsmEntitySettingsUpdateRes == Failure]

CCOIv2-REQ-358557 - SynchronizationSummaryReport mismatch
CCOIv2-REQ-362641 - Store Server Entity Settings on Client: Server updated A CCS Entity

SpcmCcsmOnBoardPolicyServerStateInd(SynchronizationFailed)
SpcmCcsmOnBoardHMISystemPolicyClientStateInd(SynchronizationFailed)

ref CCOIv2-SD-REQ-361332 - SynchronizationFailed

[Server data matches with Summary Report
AND (ModemClient.SpcmCcsmEntitySettingsUpdateRes == Success OR !TCU present)
AND Client.SpcmCcsmEntitySettingsUpdateRes == Success]

CCOIv2-REQ-358559 - SynchronizationSummaryReport match
CCOIv2-REQ-362641 - Store Server Entity Settings on Client: Server updated A CCS Entity

alt [Policy File Transfer]
   set pending Policy Files to LastKnownGood

reset Amount_of_Synchronizing_Retries

SpcmCcsmOnBoardPolicyServerStateInd(Synchronized)
SpcmCcsmOnBoardHMISystemPolicyClientStateInd(Synchronized)

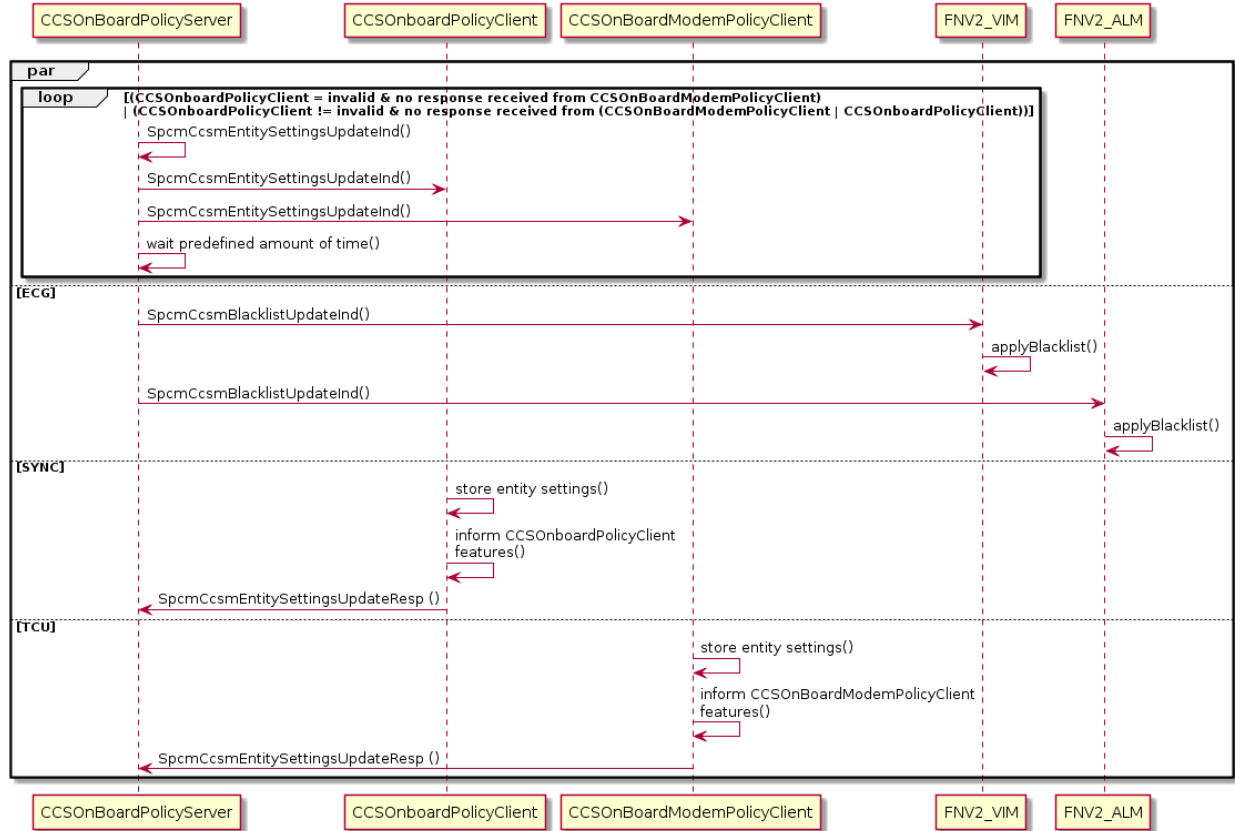CCSOnBoardPolicyServer   CCSOnBoardPolicyClient
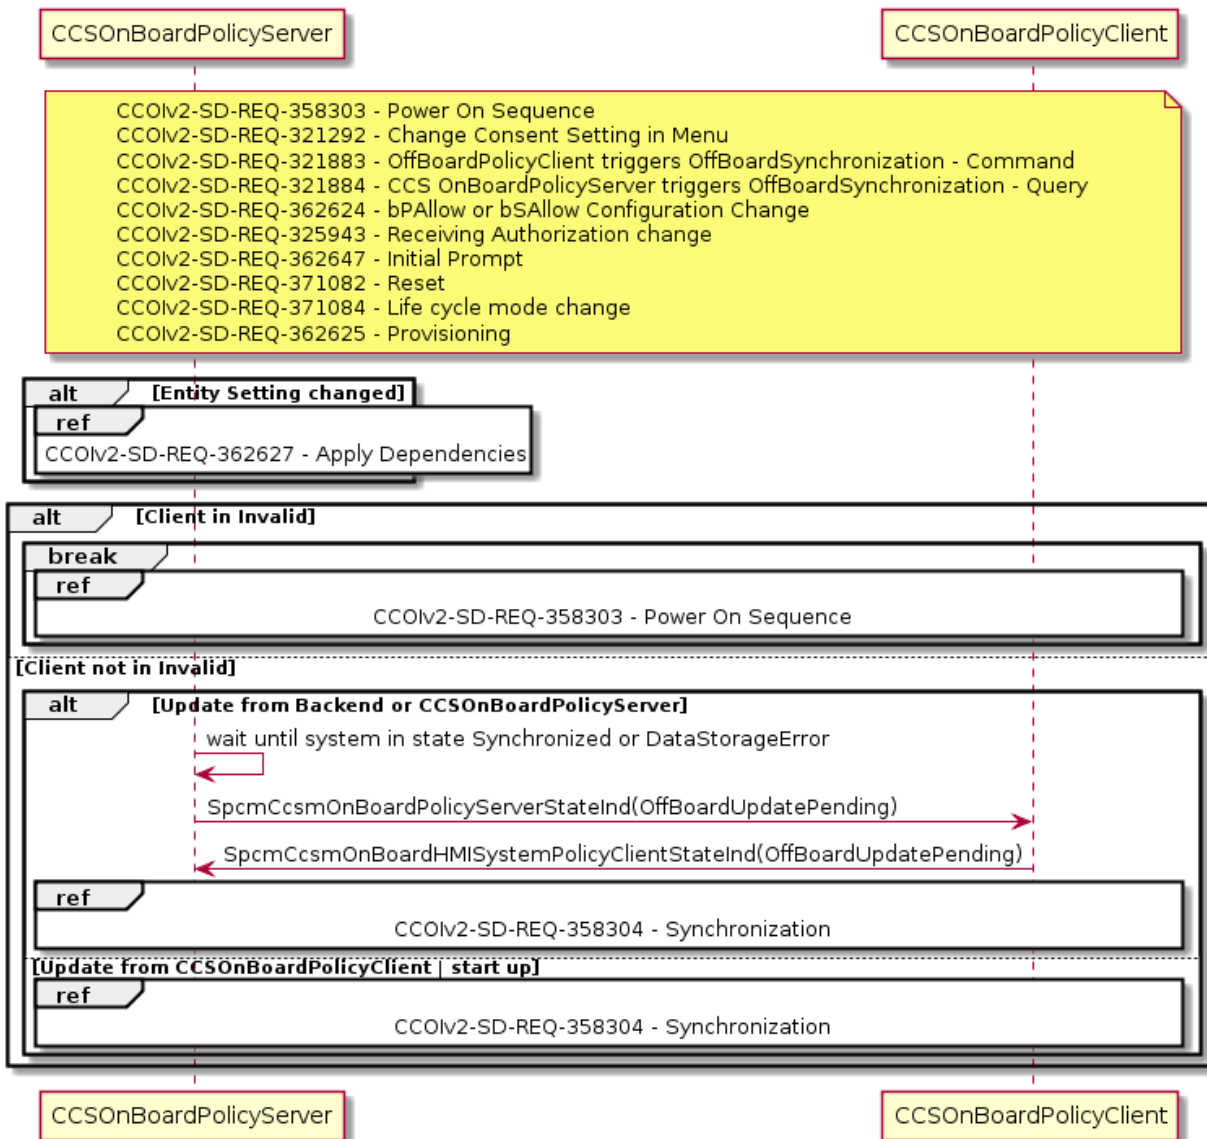
4.3.5.3 *CCOIv2-SD-REQ-361332/B-SynchronizationFailed*

4.3.5.4 CCOIv2-SD-REQ-362628/B-Distribute Entity Settings and Blacklist

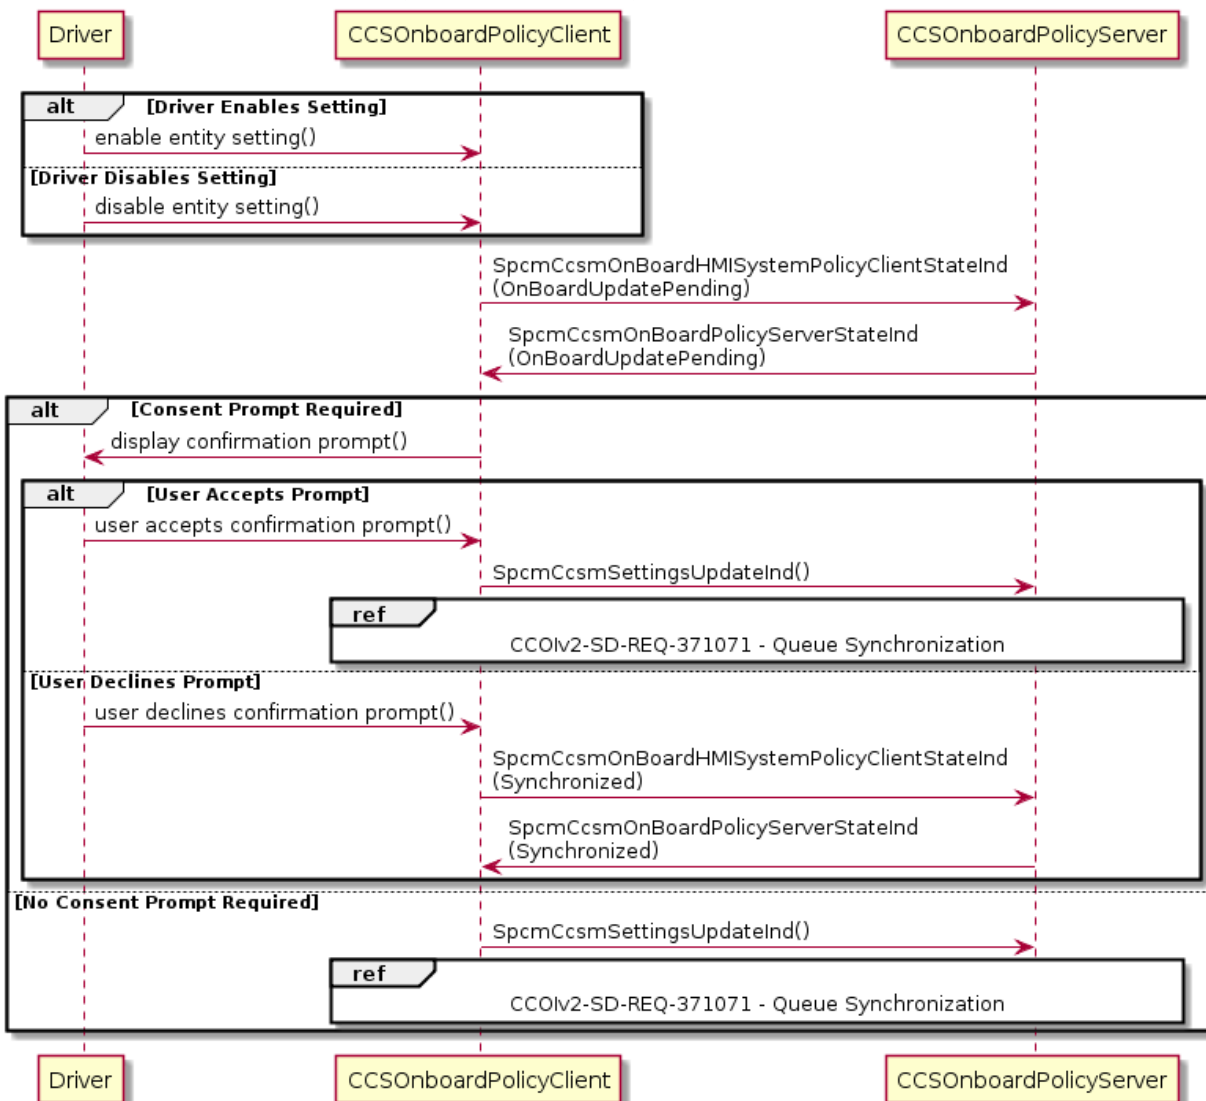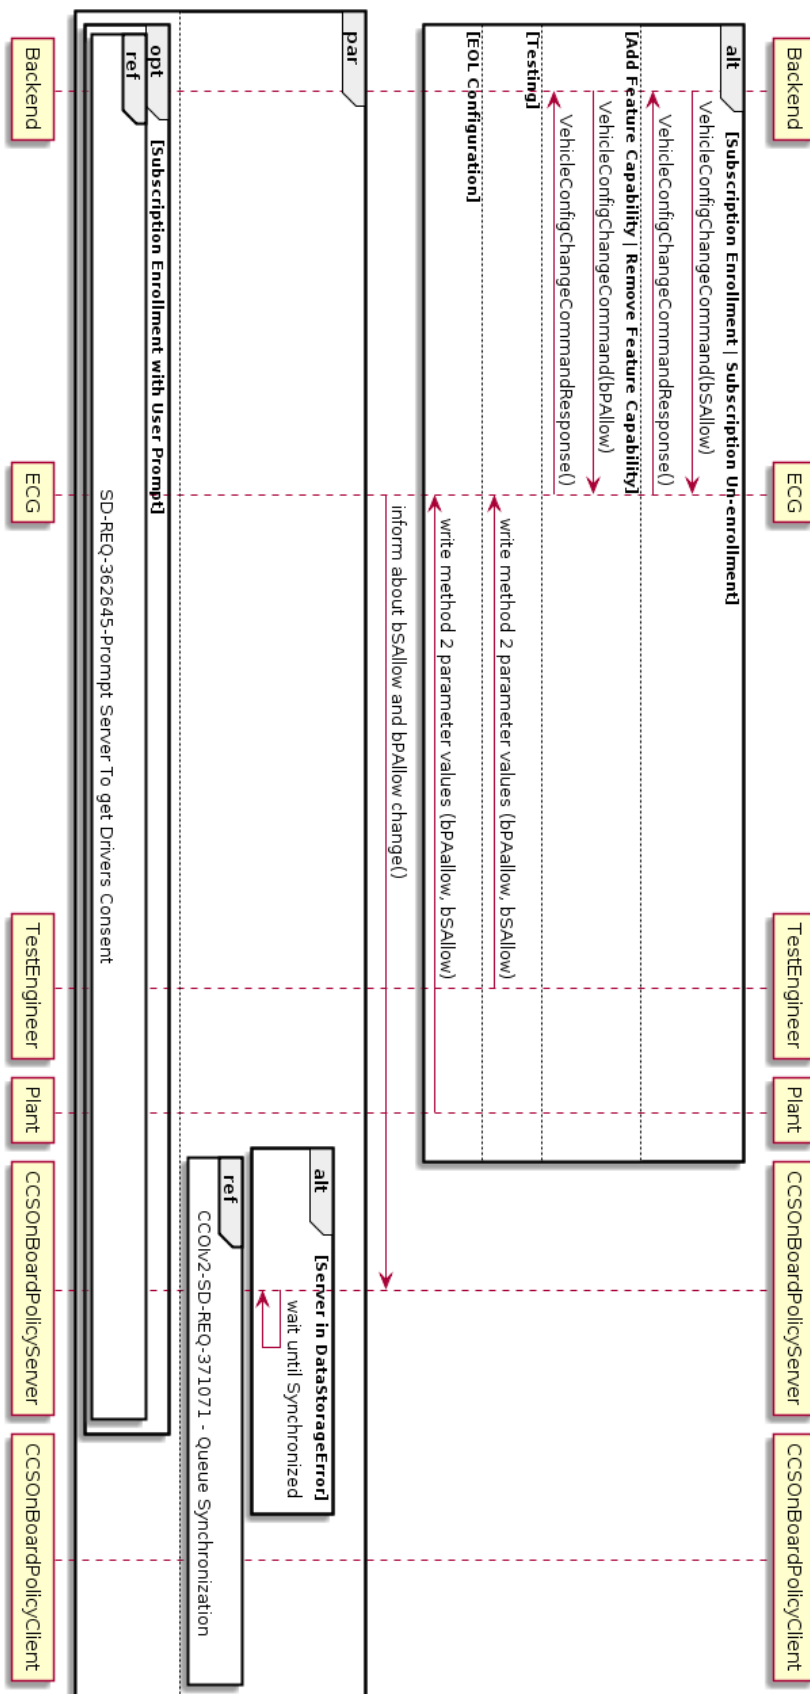### 4.3.5.5 CCOIv2-SD-REQ-371071/A-Queue Synchronization

CCSOnBoardPolicyServer   **CCSOnBoardPolicyClient**

CCOIv2-SD-REQ-358303 - Power On Sequence
CCOIv2-SD-REQ-321292 - Change Consent Setting in Menu
CCOIv2-SD-REQ-321883 - OffBoardPolicyClient triggers OffBoardSynchronization - Command
CCOIv2-SD-REQ-321884 - CCS OnBoardPolicyServer triggers OffBoardSynchronization - Query
CCOIv2-SD-REQ-362624 - bPAllow or bSAllow Configuration Change
CCOIv2-SD-REQ-325943 - Receiving Authorization change
CCOIv2-SD-REQ-362647 - Initial Prompt
CCOIv2-SD-REQ-371082 - Reset
CCOIv2-SD-REQ-371084 - Life cycle mode change
CCOIv2-SD-REQ-362625 - Provisioning

alt [Entity Setting changed]
  ref
  CCOIv2-SD-REQ-362627 - Apply Dependencies

alt [Client in Invalid]
  break
    ref
    CCOIv2-SD-REQ-358303 - Power On Sequence

  [Client not in Invalid]
    alt [Update from Backend or CCSOnBoardPolicyServer]
      wait until system in state Synchronized or DataStorageError

      SpcmCcsmOnBoardPolicyServerStateInd(OffBoardUpdatePending)

      SpcmCcsmOnBoardHMISystemPolicyClientStateInd(OffBoardUpdatePending)
      ref
      CCOIv2-SD-REQ-358304 - Synchronization

    [Update from CCSOnBoardPolicyClient | start up]
      ref
      CCOIv2-SD-REQ-358304 - Synchronization

CCSOnBoardPolicyServer   **CCSOnBoardPolicyClient**

4.3.5.6 *CCOIv2-SD-REQ-321292/D-Change Consent Setting in Menu*
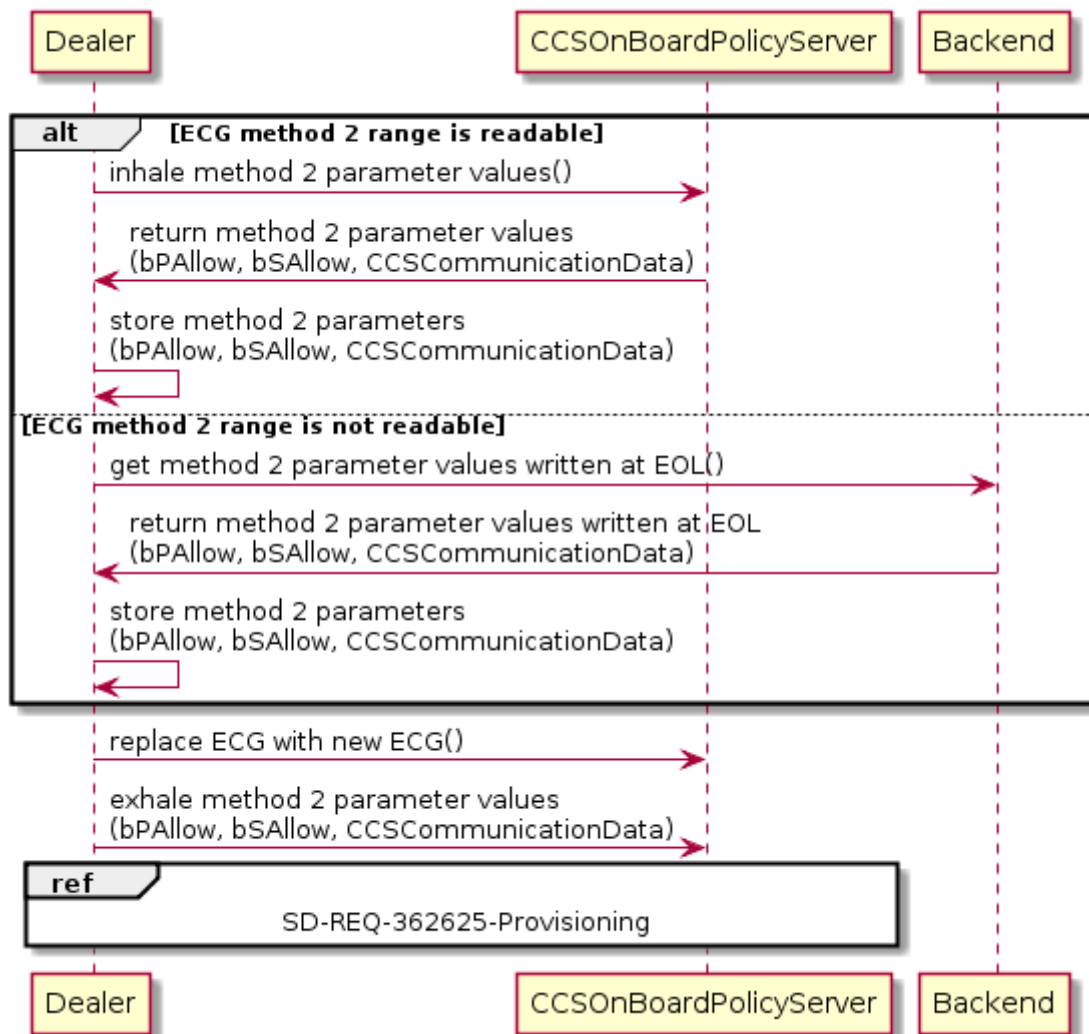
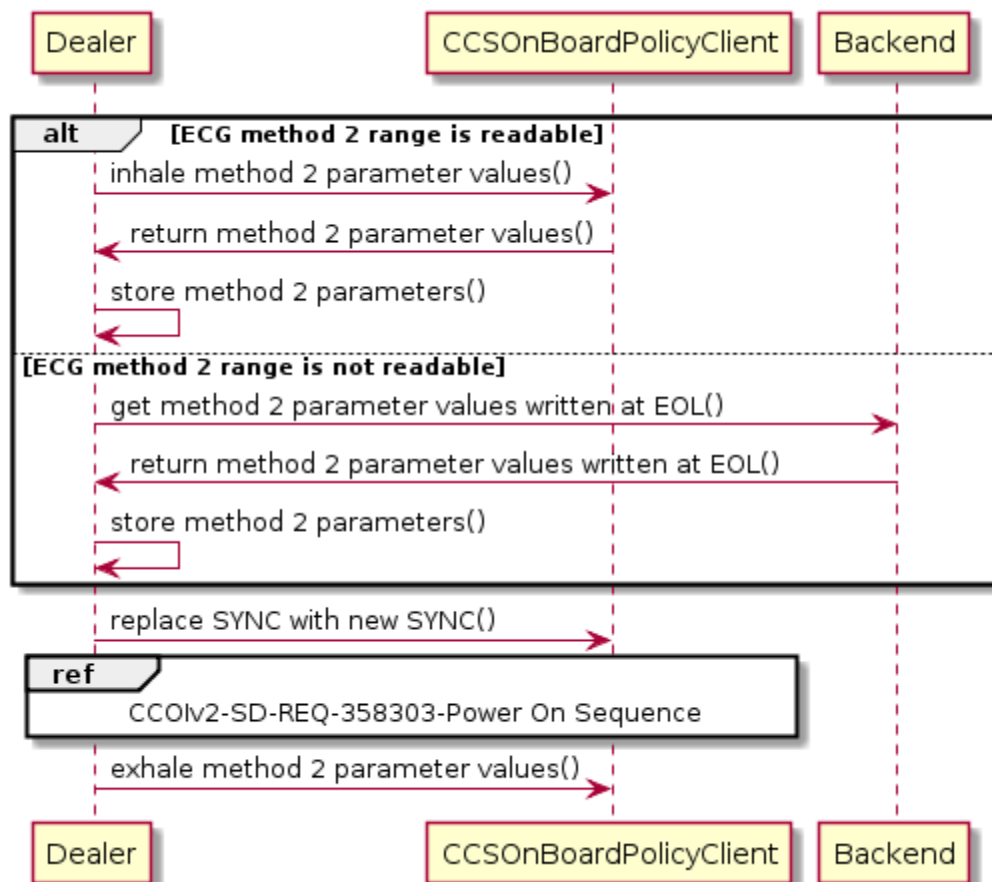### 4.3.5.7 *CCOIv2-SD-REQ-362624/B-bPAllow or bSAllow Configuration Change*

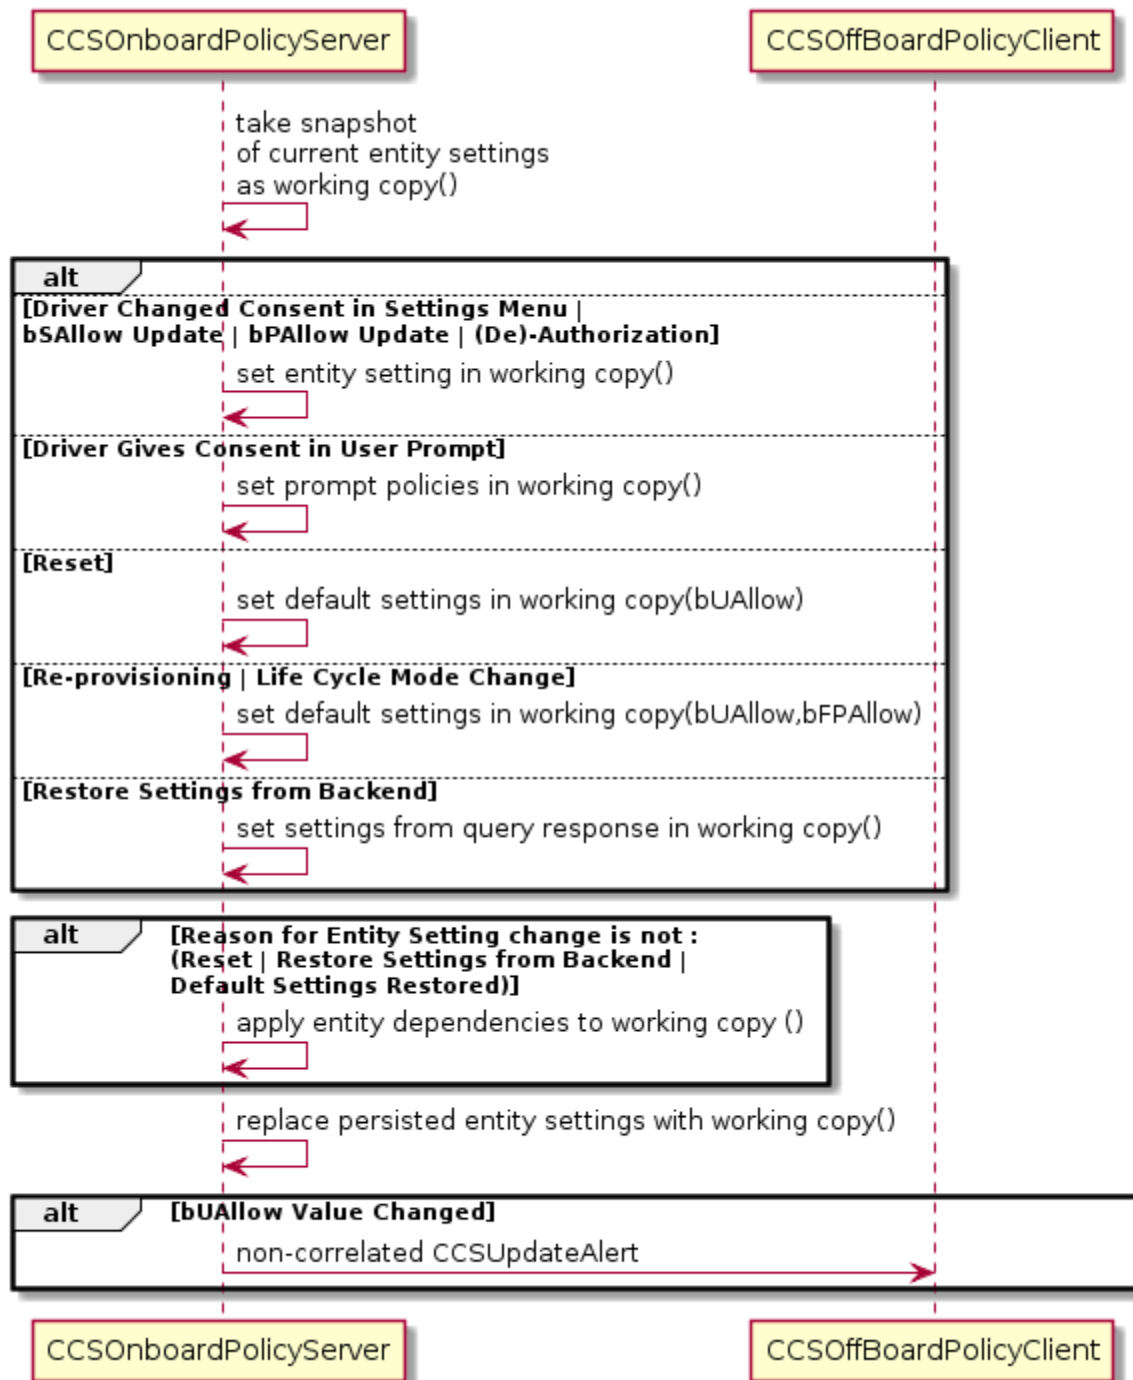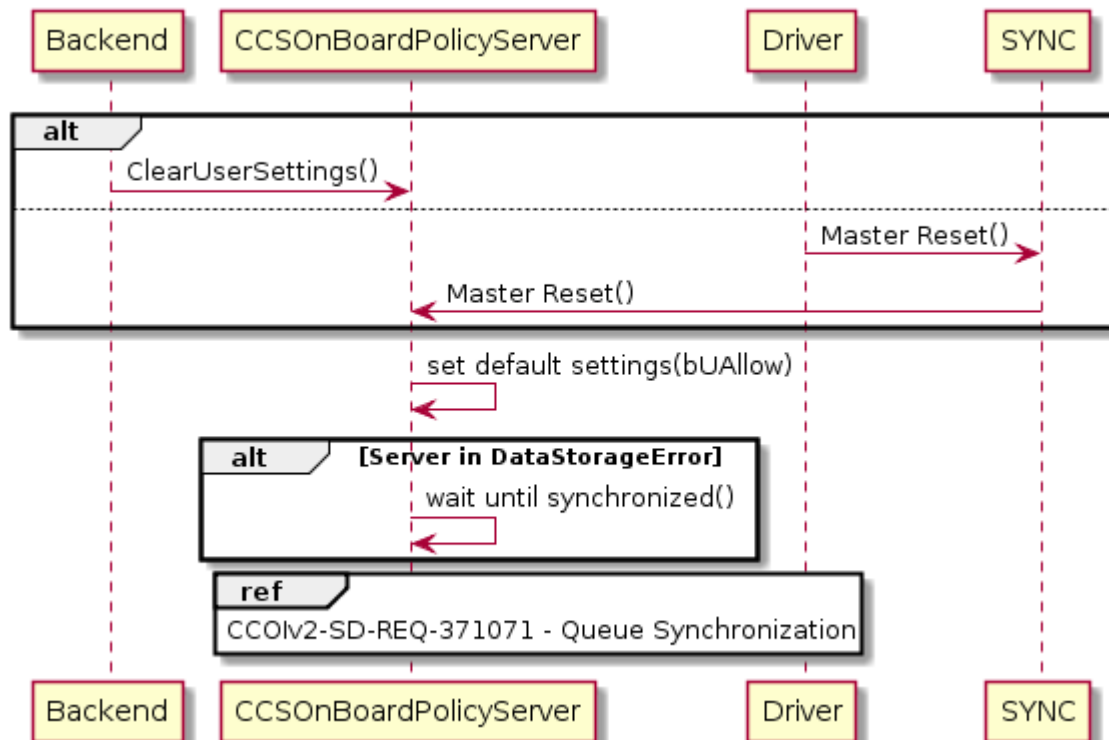### 4.3.5.8 CCOIv2-SD-REQ-362626/A-ECG Swap
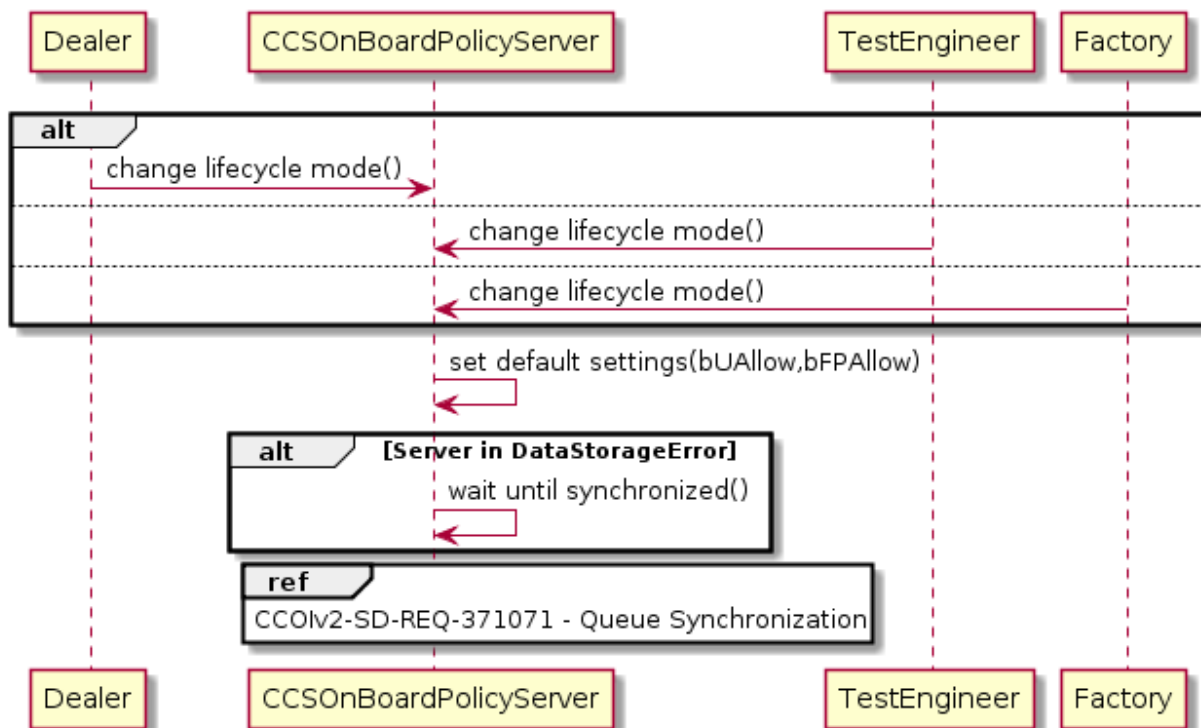
4.3.5.9 CCOIv2-SD-REQ-371654/A-SYNC Swap

4.3.5.10 CCOIv2-SD-REQ-362627/B-Apply Dependencies
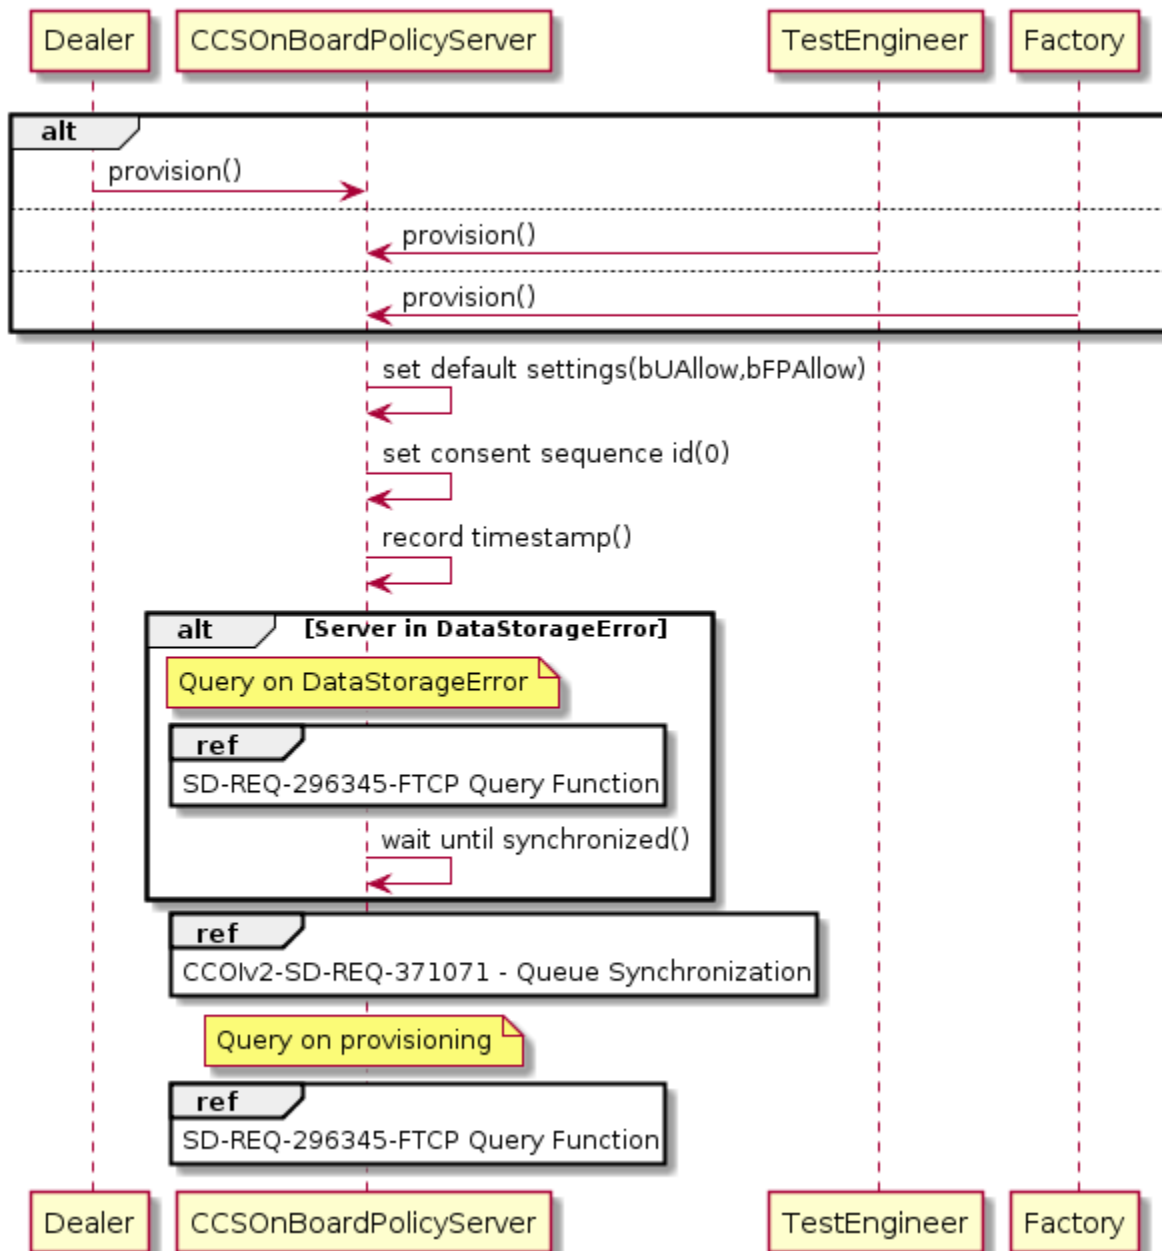
4.3.5.11 CCOIv2-SD-REQ-371082/A-Reset

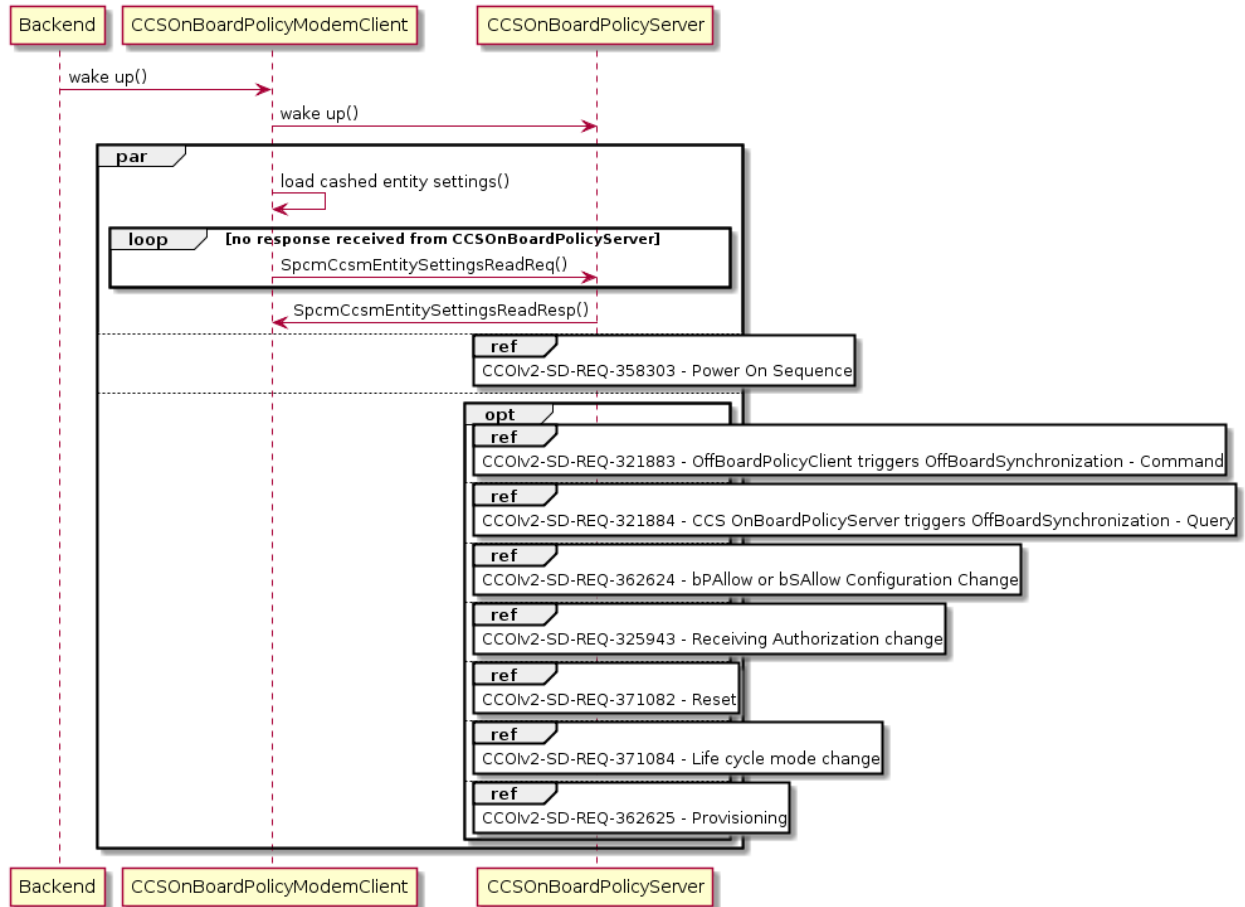### 4.3.5.12 CCOIv2-SD-REQ-371084/A-Lifecycle Mode Change

4.3.5.13 CCOIv2-SD-REQ-362625/B-Provisioning

4.3.5.14 CCOIv2-SD-REQ-372229/A-SMS Wake Up

4.4   CCOIv2-FUN-REQ-362747/A-Policy Enforcement (Client)

The central purpose of CCS is to give notice and control to vehicle users regarding the data that is wirelessly transmitted off of the vehicle, helping Ford's compliance with data protection requirements including the European GDPR regulations. It demands to give a user control of which data is being shared with granular control of different data categories. Any opt-in/opt-out decision the user has made via the CCS HMI is broadcasted on the vehicle system, so the settings can be applied by any connected feature. To guarantee compliance and a robust technical solution, in a second step CCS enforces the settings via the CCS Policy Enforcer.

4.4.1   Use Cases

4.4.1.1   *CCOIv2-UC-REQ-296189/E-Enforce policies*

Actors	CCSOnBoardPolicyServer, CCSOnBoardPolicyClient, CCSOnBoardPolicyModemClient, ALM, VIM, Feature Applications
Pre-conditions	Updated Entity Settings and Blacklist are distributed to all relevant parties (CCSOnBoardPolicyServer peforms an onbord synchronization)

Scenario Description	1. PolicyEnforcers apply received blacklist and settings:
	2. ECG enforces policies
	   2.1. VIM blocks application's access to information that a driver does not want to share
	   2.2. ALM turns applications off that are disabled by the driver
	3. SYNC enforces policies
	   3.1. Trusted Feature Applications don't send information off board that a driver does not want to share
	   3.2. Feature Applications don't get access to information that a driver does not want to share
	4. TCU enforces policies
	   4.1. Trusted Feature Applications don't send information off board that a driver does not want to share

Post-conditions	All policy enforcers behave according to the latest driver privacy settings.
List of Exception Use Cases	E1: Some features may have exceptions from policy enforcement if there are legal grounds. See requirements section for details.
Interfaces	

4.4.2   Requirements

4.4.2.1   *CCOIv2-REQ-362753/A-Connected Navigation*

If the bAllow for entity ConnectedNavigationviaModem (ID 11, Type 1) is disabled
- the Connected Navigation feature application shall not share any navigation related information outside the vehicle
- the Connected Navigation feature application shall turn the connection to the navigation service provider's backend off

If the bAllow for entity ConnectedNavigationviaModem (ID 11, Type 1) is enabled
- the Connected Navigation feature application is allowed to share navigation related information with the navigation provider's backend
- the Connected Navigation feature application is allowed to turn the connection to the navigation service provider's backend on

Note: the impact of other privacy settings (e.g. location sharing or vehicle data sharing) on the enablement of the feature is handled through REQ-296883-Dependency on Policy Table Extension.

4.4.2.1.1   REQ-362948/A-Connected Navigation - Restricted Data

The Connected Navigation feature application shall limit the Connected Navigation service provider's access to information as outlined in the Connected Navigation specification.

4.4.2.2 CCOIv2-REQ-362754/A-Connected Voice (Nuance)

4.4.2.2.1 CCOIv2-REQ-362757/A-Connected Voice (Nuance) - Nuance Setting

If the bAllow for entity Nuance (ID 41, Type 1) is disabled
- the Connected Voice (Nuance) feature application shall not share voice utterances outside the vehicle
- the Connected Voice (Nuance) feature application shall turn the connection to the connected voice (Nuance) service provider's backend off

If the bAllow for entity Nuance (ID 41, Type 1) is enabled
- the Connected Voice (Nuance) feature application is allowed to share voice utterances with the connected voice (Nuance) service provider's backend
- the Connected Voice (Nuance) feature application is allowed to turn the connection to the connected voice (Nuance) service provider's backend on

4.4.2.2.2 CCOIv2-REQ-362758/A-Connected Voice (Nuance) - Location Sharing Setting

If the bAllow for entity Nuance (ID 41, Type 1) is enabled but the bAllow for entity LocationSharing (ID 4, Type 0) is disabled the Connected Voice (Nuance) feature application shall not share location information outside the vehicle such as the examples listed below.

If the bAllow for entity Nuance (ID 41, Type 1) is enabled and the bAllow for entity LocationSharing (ID 4, Type 0) is enabled the Connected Voice (Nuance) feature application is allowed to share the location information such as the examples listed below with the connected voice (Nuance) service provider's backend.

- current location
- destination information
- route information
- estimated time of arrival

4.4.2.2.3 CCOIv2-REQ-362760/A-Connected Voice (Nuance) - Driving Data Setting

If the bAllow for entity Nuance (ID 41, Type 1) is enabled but the bAllow for entity DrivingCharacteristics (ID 14, Type 0) is disabled the Connected Voice (Nuance) feature application shall not share the driving information such as fuel range and fuel level outside the vehicle.

If the bAllow for entity Nuance (ID 41, Type 1) is enabled and the bAllow for entity DrivingCharacteristics (ID 14, Type 0) is enabled the Connected Voice (Nuance) feature application is allowed to share the driving information such as fuel range and fuel level with the connected voice (Nuance) service provider's backend.

4.4.2.2.4 CCOIv2-REQ-362761/A-Connected Voice (Nuance) - Vehicle Data Setting

If the bAllow for entity Nuance (ID 41, Type 1) is enabled but the bAllow for entity VehicleData (ID 5, Type 0) is disabled the Connected Voice (Nuance) feature application shall not share information about the vehicle, the status or the performance of its systems, such as the car size, outside the vehicle.

If the bAllow for entity Nuance (ID 41, Type 1) is enabled and the bAllow for entity VehicleData (ID 5, Type 0) is enabled the Connected Voice (Nuance) feature application is allowed to share information about the vehicle, the status or the performance of its systems, such as the car size, with the connected voice (Nuance) service provider's backend.

4.4.2.2.5 CCOIv2-REQ-362762/A-Connected Voice (Nuance) - Contact Upload Setting

If the bAllow for entity Nuance (ID 41, Type 1) is enabled but the bAllow for entity Contacts (ID 25, Type 0) is disabled the Connected Voice (Nuance) feature application shall not share information about the paired phone contacts and devices outside the vehicle.

If the bAllow for entity Nuance (ID 41, Type 1) is enabled and the bAllow for entity Contacts (ID 25, Type 0) is enabled the Connected Voice (Nuance) feature application is allowed to share information about the paired phone contacts and devices with the connected voice (Nuance) service provider's backend.

4.4.2.2.6 CCOIv2-REQ-362764/A-Connected Voice (Nuance) - Restricted Data

The Connected Voice (Nuance) feature application shall limit the connected voice (Nuance)'s service provider's access to information as outlined in the Nuance specification.

4.4.2.3 CCOIv2-REQ-362765/A-Analytics

4.4.2.3.1 CCOIv2-REQ-362766/A-Diagnostics

If the bAllow for entity Diagnostics (ID 46, Type 1) is disabled the CCSOnBoardPolicyClient shall not collect or share diagnostic related information with the Ford backend.
If the bAllow for entity Diagnostics (ID 46, Type 1) is enabled the CCSOnBoardPolicyClient is allowed to collect and share diagnostic related information with the Ford backend.

Note 1: For the data elements that are allowed to be collected see the Analytics specification.

Note 2: the impact of other privacy settings (e.g. vehicle data sharing) on the enablement of the feature is handled through REQ-296883-Dependency on Policy Table Extension.

4.4.2.3.2 CCOIv2-REQ-362768/A-Vehicle Analytics

If the bAllow for entity Analytics (ID 45, Type 1) is disabled the CCSOnBoardPolicyClient shall not collect or share vehicle analytics related information with the Ford backend.
If the bAllow for entity Analytics (ID 45, Type 1) is enabled the CCSOnBoardPolicyClient is allowed to collect and share vehicle analytics related information with the Ford backend.

Note: For the data elements that are allowed to be collected see the Analytics specification.

4.4.2.3.3 CCOIv2-REQ-362770/A-Voice Recognition Feedback

If the bAllow for entity FEATURE72 (ID 72, Type 1) is disabled the CCSOnBoardPolicyClient shall not collect or share voice recognition feedback or failed voice command related information with the Ford backend.
If the bAllow for entity FEATURE72 (ID 72, Type 1) is enabled the CCSOnBoardPolicyClient is allowed to collect or share voice recognition feedback or failed voice command related information with the Ford backend.

Note 1: For the data elements that are allowed to be collected see the Analytics specification.

Note 2: the impact of other privacy settings (e.g. vehicle data sharing) on the enablement of the feature is handled through REQ-296883-Dependency on Policy Table Extension.

4.4.2.3.4 CCOIv2-REQ-362771/A-Media Analytics

If the bAllow for entity RadioAnalytics (ID 49, Type 1) is disabled the CCSOnBoardPolicyClient shall not collect or share media usage or radio listening analytics related information with the Ford backend.
If the bAllow for entity RadioAnalytics (ID 49, Type 1) is enabled the CCSOnBoardPolicyClient is allowed to collect or share media usage or radio listening analytics related information with the Ford backend.

Note 1: For the data elements that are allowed to be collected see the Analytics specification.

Note 2: the impact of other privacy settings (e.g. vehicle location sharing) on the enablement of the feature is handled through REQ-296883-Dependency on Policy Table Extension.

4.4.2.4   CCOIv2-REQ-362776/A-Sirius XM 360L

If the bAllow for entity SiriusXM (ID 12, Type 1) is disabled the Sirius XM feature application shall turn the connection to the Sirius XM 360L service provider's backend off.

If the bAllow for entity SiriusXM (ID 12, Type 1) is enabled the Sirius XM feature application is allowed to turn the connection to the Sirius XM 360L service provider's backend on.

Note: the impact of other privacy settings (e.g. vehicle connectivity) on the enablement of the feature is handled through REQ-296883-Dependency on Policy Table Extension.

4.4.2.4.1   REQ-362949/A-Sirius XM 360L - Restricted Data

The SiriusXM feature application shall limit the Sirius service provider's access to information as outlined in the Nuance specification.

4.4.2.5   CCOIv2-REQ-362777/A-Digital Owners Manual

If the bAllow for entity VehicleConnectivity (ID 1, Type 0) is enabled the Digital Owner's Manual feature application is allowed to stream videos from the Ford backend for the Digital Owner's Manual.

Note: If the bAllow for entity VehicleConnectivity (ID 1, Type 0) is disabled the Digital Owner's Manual is not able to stream videos from the Ford backend as connectivity is disabled.

4.4.2.6   CCOIv2-REQ-362778/A-Rocket Setup

If the bAllow for entity VehicleConnectivity (ID 1, Type 0) is enabled the Rocket Setup feature application is allowed to pre-set vehicle settings in the vehicle from the Ford backend for rocket setup.

4.4.2.7   CCOIv2-REQ-362805/A-Mobile Phone Interface Not Affected by CCS Entity Settings

The CCSOnBoardPolicyClient shall grant the following features, which may be connected via the connection of the driver's mobile devices, access to vehicle information for off board sharing independent of the CCS Entity Settings.

- Android Auto
- Apple Carplay
- Applink

Rationale: These features have their own privacy settings that are managed independent of the CCS settings. Customers are informed that these settings are not affected in the info icons for the CCS settings.

4.4.2.8   CCOIv2-REQ-362779/A-Block All Connections for Not Listed Features

The CCSOnBoardPolicyClient shall block all off board connections for feature applications on the CCSOnBoardPolicyClient, which are not listed in REQ-362747-Policy Enforcement (Client).

4.5 CCOIv2-FUN-REQ-296182/A-CCS settings menu

4.5.1 Use Cases

4.5.1.1 CCOIv2-UC-REQ-296183/B-show CCS settings menu

Actors	User, CCS Client
Pre-conditions	IGN On
Scenario Description	1. User enters CCS settings menu.
Post-conditions	The CCS menu is presented to the user based on the current entity settings and the currently active policy files.
List of Exception Use Cases	E1: 1a) CCS System is not synchronized .1 CCS menu is not accessible, error message will be shown
Interfaces	GUI

4.5.1.2 CCOIv2-UC-REQ-296184/B-check entity settings

Actors	Driver, CCS Client
Pre-conditions	IGN On
Scenario Description	1. Driver enters CCS menu 2. An entity allow bit changes (e.g. due to a change of an entity setting by the user) 3. the menu has to be updated according to the policy file and requirements
Post-conditions	Settings menu is updated.
List of Exception Use Cases	E1: 1a) CCS System is not synchronized .1 CCS menu is not accessible, error message is shown
Interfaces	GUI

4.5.2 Requirements

4.5.2.1 CCOIv2-REQ-296878/B-Building Connectivity Settings menu

The connectivity settings menu shall be dynamically displayed based on the Policy Table rules from the PTE and CFM file. Ref. REQ-292436 Policy Table Definition for applicable rulesets.

4.5.2.2 CCOIv2-REQ-296192/B-Driver Restrictions SPSS dependencies

The Customer Connectivity Settings may be affected by regional Driver Restrictions Settings. Please See Driver Restrictions Settings SPSS and the HMI Specification for details.

4.5.2.3 CCOIv2-REQ-296875/A-Setting Update Reflection

When there is no ongoing HMI task to change a user setting, the settings menu shall always use the values provided during the last successful synchronization procedure by the OnBoardPolicyServer for display.

4.5.2.4 CCOIv2-REQ-296876/B-Visual Feedback based on Settings and Policy Table Extension

If an entity is shown based on PTE section logic "menuPolices", it shall be displayed or not displayed according to the following rules:

Input			Effect				
bPAllow	**bFPAllow**	**bSAllow**	**Entry Visible**	**Entry Layout**	**Switch changeable**	**Switch layout**	**Switch position**
OFF	Don't care	Don't care	NO	n/a	n/a	n/a	n/a
ON	ON	OFF	YES	solid	NO	locked	OFF
ON	ON	ON	YES	solid	NO	locked	ON
ON	OFF	OFF	YES	greyed out	NO	greyed out	OFF
ON	OFF	ON	YES	solid	YES	solid	Per UAllow

If an entity is not shown based on PTE section logic "menuPolices", it shall be invisible independent of entity bit values.

4.6 CCOIv2-FUN-REQ-362370/A-Policy Table Definition (Client)

4.6.1 Use Cases

4.6.1.1 CCOIv2-UC-REQ-296178/B-parse Policy Files

Actors	CCS OnBoardPolicyClient, CCS OnBoardPolicyServer
Pre-conditions	Policy File parsing component (CCS Server or Client) running, valid policy table set available
Scenario Description	CCS component parses policy files to provide all necessary information to show the CCS settings menu, CCS associated Pop-Up, CCS related wording (CCS OnBoardPolicyClient), or to apply EntityDefinitions or SCF content (CCS OnBoardPolicyServer)
Post-conditions	CCS related wordings and structures are available for the HMI, CCS rules are applied by CCS OnBoardPolicyServer
List of Exception Use Cases	E1: CCS Policy files do not contain valid combination of entities and available wordings.
Interfaces	GUI

4.6.2 Requirements

4.6.2.1 CCOIv2-REQ-296414/D-Policy Tables

Policy Tables define a dynamically configurable part of the CCS feature. These tables are generated on Ford Backend side based on rules defined in the ARMR backend component (CCSOffBoardPolicyClient).

There shall be a set of default policy tables stored on the CCS Server. It shall be used, as long as no updates were received via OffBoardSynchronization from the CCSOffBoardPolicyClient.

In general, there are 3 different policy files.

Customer Friendly Messages (CFM)
The "Customer Friendly Messages" file contains wording for almost any CCS related screen. There are different CFM files with content depending on screen size and language. The CCS server shall store CFM default files for any possible combination of screen size and language.
Updates of CFM can be transferred from the CCSOffBoardPolicyClient per off board synchronization process

Common Policy Table Extension (Common PTE)
The "Common Policy Table Extension" file contains an entity-dependent logic, defining the behavior of CCS, e.g. visibility of menu entries, information sharing icon logic or the effect of accepting/declining CCS activation/authorization pop-ups. These rules shall be applied by the CCS OnBoardPolicyClient.
The PTE also contains a default set of entities, their default opt-in values and their inter-dependencies on other entities. These rules shall be applied by the CCS OnBoardPolicyServer.
Updates of Common PTE can be transferred from the CCSOffBoardPolicyClient per off board synchronization process.

Service Config File (SCF)
The "Service Config File" contains the logic, which kind of information shall be assigned to a CCS Entity. It may include CAN signals, primitives or even entire applications. Based on the SCF and the actual CCS entity settings, the CCS OnBoardPolicyServer creates a blacklist of signals, primitives and applications, which need to be blocked. This information is published to, and applied by the Policy Enforcer implementing modules.

4.6.2.2 CCOIv2-REQ-328986/B-Policy File compression

The payload data for transmission of policy files transferred via the off board synchronization process shall be LZMA decompressed by the responsible CCS component.

4.6.2.3 CCOIv2-REQ-362371/A-Persistent Storage and Hashing

CCS OnBoardPolicyClient shall store CCOI data persistently across power states. To protect against inconsistency, in Synchronization state "Waiting" the stored information shall be checked against attached hash values before using it.

4.6.2.3.1 CCOIv2-REQ-362372/A-Failed Client Consistency Check

Upon reading stored information and failing the hash based consistency check, CCS OnBoardPolicyClient shall proceed to Synchronization state "SynchronizationNeeded" and shall set the Policy Table Minor Version in SynchronizationSession_Rq to zero for the OnBoardSynchronization Process.

4.6.2.4 CCOIv2-REQ-296368/C-User Friendly Messages variables

User Friendly Messages strings may contain variables.

Variables dependent on make:
Variable name: %modemName%
Ford: Refer to CCOIv2-REQ-328981 - ford_modemName
Lincoln: Refer to CCOIv2-REQ-328982 - lincoln_modemName

Variable name: %appName%
Ford: Refer to CCOIv2-REQ-328977 - ford_app
Lincoln: Refer to CCOIv2-REQ-328978 - lincoln_app

Variable name: %vehicleMake%
Ford: Refer to CCOIv2-REQ-328979 - ford_brand
Lincoln: Refer to CCOIv2-REQ-328980 - lincoln_brand

Variables received from CCSOnBoardPolicyServer through SpcmCcsmUserPromptReq:
Variable name: %sText1% – received via SpcmCcsmUserPromptReq: variableText1
Variable name: %sText2% – received via SpcmCcsmUserPromptReq: variableText2

Variables for subscription end dates:
Variable name: %expirationDate%
Refer to CCOIv2-REQ-328948 - featureSubscriptions. Depending on the message code the variable is used in, the expiration date with the matching entityID/type needs to be shown.

4.6.2.5 Policy Table Extension content definition

4.6.2.5.1 General explanations

4.6.2.5.1.1 CCOIv2-REQ-318822/C-unique identifier

A CCS entity shall be uniquely identifiable. Currently there are two unique identifiers:

1) FeatureCode
OR
2) Combination of entityType and entityID

Each entity has an optional label commentEntityName.

Rationale: There are two unique identifiers because of legacy architecture on the CCS CCSOffBoardPolicyClient. The CCSOffBoardPolicyClient will store entity changes based on the combination of entityType and entityID.
Applications shall be able to read a specific entity setting via CCS API either by referencing entity type and ID OR by referencing the FeatureCode.

4.6.2.5.1.2 CCOIv2-REQ-318821/A-EntityType

Valid entity types are
- 0 – META
- 1 – FEATURE

- 2 – FUNCTION

4.6.2.5.1.3   CCOIv2-REQ-328930/A-priority

Defines which policy takes precedence. The lower the number, the higher the priority. When conditions are met for multiple policies with conflicting effects only the highest priority (lowest numbered entry) shall apply.

If no priority is specified all applicable policies shall be applied.

4.6.2.5.1.4   CCOIv2-REQ-318823/C-regions

regions allows regional control over what policy shall apply. See REQ-328928 - regionDefinitions for the definition of regions in the PTE. If regions is "default", that policy targets all regions, which are not assigned explicitly. The considered policy of that category subset shall be filtered to regions matching the configured region or all regions ("default"). This list is then selected based on the priority of policies in the subset, per REQ-328930 - priority.

4.6.2.5.1.5   CCOIv2-REQ-328931/A-conditions

The effects of a policy must pass an additional check if the policies conditions do not equal "null". The conditions calls out the policy to check via the unique identifiers (ref. REQ-318822), which reference a particular Allow bit. The value to check against is given in the parameter entityBitSetting (ref. REQ-328989). Multiple conditions may be defined. For a specific policy with one or more defined conditions, all the conditions must evaluate to true, in order to execute the given effects list. Hence when multiple conditions are listed, the result is in effect a boolean AND operation of the results for each list item.

4.6.2.5.1.6   CCOIv2-REQ-328989/A-entityBitSetting

The entityBitSetting evaluates whether a specific allow bit is TRUE or FALSE.

The set of entityBitSetting states are defined in REQ-329000.

Example:

If the entityBitSetting is "bPAllow_On" then the effects shall be applied if the bPAllow for the specified entity is TRUE.

4.6.2.5.1.7   CCOIv2-REQ-329000/A-entity bit states

The entity states are:
bPAllow_On
bPAllow_Off
bFPAllow_On
bFPAllow_Off
bSAllow_On
bSAllow_Off
bUAllow_On
bUAllow_Off
bAllow_On
bAllow_Off

4.6.2.5.1.8   CCOIv2-REQ-328932/A-effects

The effects shall only be applied, if the conditions are met or there are no conditions specified. Multiple effects entries may be specified.

4.6.2.5.1.9   CCOIv2-REQ-328922/A-messageCode (Policy Table Extension)

messageCode is a reference to the CFM files and contains the wordings for the entity for example confirmation prompts, menu entries, or pop-up wordings. For an explanation of all wording parameters, refer to section "User Friendly Messages content definition".

4.6.2.5.1.10   CCOIv2-REQ-329002/A-action

The action sets the value for a specific allow bit of the specified entity to TRUE or FALSE.
The set of action states are defined in REQ-329000:

Example:

If the action is "bPAllow_On" then the bPAllow for the specified entity shall be set to TRUE.

4.6.2.5.2   CCOIv2-REQ-329003/B-header

The header section of the PTE file consists of the parameters „PlatformVersion", „MajorVersion", „ARMRMinorVersion" and „APCAMinorVersion". These parameters are for troubleshooting only and shall not be parsed by the CCS System.

4.6.2.5.3   CCSEntityDefinitions

The section Entity Definitions contains information about the entity rules. In particular, it contains information such as default entity settings and the dependencies on other entities.

4.6.2.5.3.1   CCOIv2-REQ-329004/C-DefaultEntitySettingPolicies

The default bUAllow values and the bFPAllow values are stored in the the DefaultEntitySettingPolicies. The policy is based on a priority (REQ-328930), a region (REQ-318823).

Note: country code changes only take effect in CCS when default settings are set. Changing the country code does not cause applying the default settings. Expected behavior is that the country code will never change post the EOL configuration.

4.6.2.5.3.2   CCOIv2-REQ-329005/B-DefaultEntityLifecycleModeSettings

Defines the default values for the allow bit settings for bUAllow and bFPAllow depending on the life cycle modes (see CCOIv2-REQ-371625-Life Cycle Mode).
DefaultEntityLifecycleModeSettings is a special variant of effects (ref. REQ-328932) to set the default values for the entity bits.

The life cycle mode based entity default parameters are:
bUAllow_normal
bUAllow_factory
bUAllow_transport
bFPAllow_normal
bFPAllow_factory
bFPAllow_transport

If the value is 1, then the default value shall be set to TRUE.
If the value is 0, then the default value shall be set to FALSE.

Normal, factory, and transport reference the lifecycle mode of the vehicle.

Example:
If the DefaultEntityLifecycleModeSettings reads as '"bUAllow_normal": 1', then the default value of the bUAllow bit for specified entity shall be set to TRUE when the vehicle enters the lifecycle mode normal.

4.6.2.5.3.3   CCOIv2-REQ-329007/C-dependencies

If the trigger conditions to apply the dependencies are met (REQ-296883-Dependency on Policy Table Extension), the CCSOnboardPolicyServer shall check whether the conditions for entityBitSetting of the changed entity are met:

- If any entityBitSetting conditions for the changed entity are met the CCSOnboardPolicyServer shall apply the effects with the included action. The effects of other entities changed in line with these dependencies shall be applied as well.
- If an entityBitSetting condition is not met for the changed entity the CCSOnboardPolicyServer shall not apply the effects that correspond to this condition.

For conditions see REQ-328931
For entityBitSetting see REQ-328989
For effects see REQ-328932
For action see REQ-329002

4.6.2.5.3.4   CCOIv2-REQ-362720/A-Dependency Execution

The CCSOnboardPolicyServer shall apply the entity dependencies from REQ-329007-dependencies in order of appearance in the policy file according to the depth-first approach.

4.6.2.5.4 **CCSFeaturePolicies**

The section Feature Policies contains information about the HMI and effects within CCS. For example, what should happen when the user selects a certain answer possibility to a user prompt, the menu entries, and feature subscriptions.

4.6.2.5.4.1   CCOIv2-REQ-328921/B-promptPolicies

promptPolicies Parameter specifies the effects for each user's decision on UserPrompt Pop-ups of type initialPrompt (i.e. "Yes", "No"). A user prompt's text is defined by the messageCode (REQ-328949) and has a label commentMessageName. If the CCSOnBoardPolicyServer receives the notification from the CCSOnBoardPolicyClient that the driver selected a userAction (REQ-296292-Effects of Accepting or Declining a UserPrompt) and conditions as well as region criteria are met, then the CCSOnBoardPolicyServer shall apply the corresponding effects with the included action.

For userAction see REQ-328925
For effects see REQ-328932
For action see REQ-329002
For conditions see REQ-328931
For regions see REQ-318823

4.6.2.5.4.1.1   CCOIv2-REQ-328925/C-userActions

userActions paramater specifies the decisions made by the driver:
- If the CCSOnBoardPolicyServer receives a SpcmCcsmUserPromptResp from the CCSOnBoardPolicyClient with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_YES" the userAction is "affirmative".
- If the CCSOnBoardPolicyServer received a SpcmCcsmUserPromptResp from the CCSOnBoardPolicyClient with promptResult = "SPCM_CCSM_PROMPT_RESULT_SELECT_NO" the userAction is "negative".

4.6.2.5.4.2   CCOIv2-REQ-328928/B-regionDefinitions

regionDefinitions parameters used in the menu policies to allow for regionalized policies.
The countries shall be mapped to regions (ref. REQ-318823) as defined in this section of the PTE. If the vehicle's configured country (CCSOnBoardPolicyServer see REQ-371617-Diagnostic Parameters for Country Code, CCSOnBoardPolicyClient see REQ-371613-Diagnostic Parameter for Country Code) is not part of any defined region or there is no policy assigned to it's region, the policies of the "default" region shall be applied.

4.6.2.5.4.3   CCOIv2-REQ-328933/A-menuPolicies

menuPolicies specifies which entities (i.e. features, functions, and meta settings) that are specified by the messageCode shall be displayed under the given conditions for the specified regions. Each menu policy has a label commentMenuPolicyName.

4.6.2.5.4.3.1   CCOIv2-REQ-328936/A-showInMenu

menuPolicies defines in which place the entities shall be displayed. There are three possibilities:

- showInConnectivitySettingsMenu: the entities shall be displayed in the placeholder from the HMI specification for the CCS Connectivity Settings
- showInMetaSettingsMenu: the entities shall be displayed in the placeholder from the HMI specification for the CCS Meta Settings
- showInFeatureSettingsMenu: the entities shall be displayed in the placeholder from the HMI specification for the CCS Feature Settings

4.6.2.5.4.3.2   CCOIv2-REQ-328937/A-sequencenumber

sequence specifies the order in which entities should be displayed in the specific placeholder. The lower the number, the higher the position in the menu. The lowest sequence is listed as the first entity in the placeholder.
When the sequence for two or more entities is the same for a given placeholder, they shall be ordered alphabetically.

Note: A sequence may or may not be consecutive (example the sequence of several entities may be: {3,4,5,1000,1000}).

4.6.2.5.4.3.3   CCOIv2-REQ-328945/A-optInSwitch

optInSwitch shall determine whether a switch is required for that entity in Connectivity Menu. If it is true, show the switch, if not do not show the switch.

4.6.2.5.4.4 CCOIv2-REQ-328939/B-iconRules

iconRules determines whether to display the sharing icon in applicable contexts, such as the status bar and to display the data sharing Pop-Up 23.
The icons and the wordings as specified by the messageCode, shall be displayed according to the pop-up's priority under the specified conditions about the entityBitSetting.

4.6.2.5.4.5 CCOIv2-REQ-328948/A-featureSubscriptions

featureSubscriptions parameter contains subscriptionExpirationDate, the expiration date and time corresponding to the defined entities. Various CFM wordings may references this value via the variable name %expirationDate%; see CFM sections for more details.

4.6.2.6 User Friendly Messages content definition

4.6.2.6.1 CCOIv2-REQ-362575/A-header

The header section of the CFM file consists of the parameters „PlatformVersion", „MajorVersion" and „MinorVersion". These parameters are for troubleshooting only and shall not be parsed by the CCS System.

4.6.2.6.2 CCOIv2-REQ-328949/B-messageCode (User Friendly Messages)

The message code is a unique reference which is used to determine which text is used to populate a specific screen/pop-up/prompt. It is also a link between the policy file and the customer friendly messages file (ref. REQ-328922). PopUps triggered via UserPrompt_Rq contain the "ScreenID" value which matches the message code.

4.6.2.6.3 CCOIv2-REQ-328950/A-displaySize

The text displayed shall be dependent on the display size (example: largeDisplay, smallDisplay).

4.6.2.6.4 CCOIv2-REQ-328951/A-languages

The language-country combination determines the language to be displayed. ISO 639-1 combined with ISO 3166 alpha-2 country code. Example: "en-us", "de-de".

4.6.2.6.5 CCOIv2-REQ-328952/A-promptType

There shall be 5 prompt types (initial prompt, menu, menu consent prompt, error, information) to populate the content of the screens/pop-ups/prompts. There shall be 6 additional prompt types (brand, app and modemName) that shall populate variable names in the screens/pop-ups/consent prompts/errors/information.

4.6.2.6.5.1 CCOIv2-REQ-328953/B-initalPrompt

initalPrompt shall populate the wordings for user prompt pop-ups of promptType "SPCM_CCSM_PROMPT_TYPE_INITIAL_PROMPT", the corresponding confirmation prompts, and info books.

4.6.2.6.5.1.1 CCOIv2-REQ-329016/A-textBody

The text body of the pop-up shall be populated with this string.

4.6.2.6.5.1.2 CCOIv2-REQ-328959/A-infoText

The text body of pop-up H31c (infoIcon) shall be populated with this string.

4.6.2.6.5.1.3 CCOIv2-REQ-328960/A-button1ConfirmationText

The text body of confirmation "affirmative" pop-up (e.g. user clicked "Yes" button in activation pop-up) shall be populated with this string.

4.6.2.6.5.1.4 CCOIv2-REQ-328961/A-button2ConfirmationText

The text body of decline "negative" pop-up (e.g. user clicked "No" button in activation pop-up) shall be populated with this string.

4.6.2.6.5.2 CCOIv2-REQ-328962/B-menu

menu shall populate the wordings for menu entries as well as the corresponding confirmation prompts, sharing pop-ups, and info books.

4.6.2.6.5.2.1   CCOIv2-REQ-328963/A-settingsMenuText

The menu entry in the respective menu section for the entity corresponding to this messageCode shall be populated with this string.

For the respective menu section see REQ-328936 - menuPolicies: showInConnectivitySettingsMenu, showInMetaSettingsMenu, and showInFeatureSettingsMenu

4.6.2.6.5.2.2   CCOIv2-REQ-328964/A-infoText_subscribed_unlocked

If bSAllow == true AND bFPAllow == false, then the text body of pop-up (infoIcon) shall be populated with this string.

4.6.2.6.5.2.3   CCOIv2-REQ-328965/A-infoText_unsubscribed_unlocked

If bSAllow == false AND bFPAllow == false, then the text body of pop-up infoIcon shall be populated with this string.

4.6.2.6.5.2.4   CCOIv2-REQ-329017/A-infoText_subscribed_locked

If bSAllow == true AND bFPAllow == true, then the text body of pop-up infoIcon shall be populated with this string.

4.6.2.6.5.2.5   CCOIv2-REQ-329018/B-infoText_unsubscribed_locked

If bSAllow == false AND bFPAllow == true, then the text body of pop-up infoIcon shall be populated with this string.

4.6.2.6.5.2.6   CCOIv2-REQ-328966/A-data_sharing_popup

The text body of the data sharing reminder pop-up shall be populated with this string.

4.6.2.6.5.3   CCOIv2-REQ-328968/A-menuConsentPrompt

menuConsentPrompt shall populate the wordings for menu consent prompts displayed to the user when enabling or disabling a CCS entity via menu.

4.6.2.6.5.3.1   CCOIv2-REQ-328969/A-textBody

If entity transition to ON requested (bUAllow == true) via menu, the text body of consent prompt Pop-Up shall be populated with this string.

4.6.2.6.5.3.2   CCOIv2-REQ-328970/A-confirmation_off

If entity transition to OFF requested (bUAllow == false) via menu, the text body of the consent prompt Pop-Up shall be populated with this string.

4.6.2.6.5.3.3   CCOIv2-REQ-328971/A-Special confirmation prompts for Vehicle Connectivity Entity

In the special case when transition to OFF requested (bUAllow == false) via menu for entity VehicleConnectivity (Id = 1, Type = 0), the following table shall determine the prompt text:

If conditions apply:		Then populate menu consent prompt with text:	Requirement reference
LBI	**IVSU**		
		confirmation_off	REQ-328970-confirmation_off
x		confirmation_off_plusLBI	REQ-328973-confirmation_off_plusLBI
	x	confirmation_off_plusIVSU	REQ-328972-confirmation_off_plusIVSU
x	x	confirmation_off_plusLBI_IVSU	REQ-328974-confirmation_off_plusLBI_IVSU

4.6.2.6.5.3.3.1   CCOIv2-REQ-328972/A-confirmation_off_plusIVSU

If the following conditions apply:
1) entity transition to OFF requested (bUAllow == false) via menu for entity VehicleConnectivity (Id = 1, Type = 0) AND
2) an IVSU package is downloaded or currently installed

then the text body of the consent prompt Pop-Up shall be populated with the text from confirmation_off_plusIVSU.

4.6.2.6.5.3.3.2   CCOIv2-REQ-328973/B-confirmation_off_plusLBI

If the following conditions apply:

1) entity transition to OFF requested (bUAllow == false) via menu for entity VehicleConnectivity (Id = 1, Type = 0) AND
2) PaaK Backup Starting Passcode (previously called LBI - Lincoln Backup Ignition) is enabled (see REQ-371615-Diagnostic Parameter for Backup Start Passcode)

then the text body of the consent prompt Pop-Up shall be populated with the text from confirmation_off_plusLBI.

4.6.2.6.5.3.3.3   CCOIv2-REQ-328974/B-confirmation_off_plusLBI_IVSU

If the following conditions apply:

1) entity transition to OFF requested (bUAllow == false) via menu for entity VehicleConnectivity (Id = 1, Type = 0) AND
2) PaaK Backup Starting Passcode (previously called LBI - Lincoln Backup Ignition) is enabled (see REQ-371615-Diagnostic Parameter for Backup Start Passcode) AND
3) an IVSU package is downloaded or currently installed

then the text body of the consent prompt Pop-Up shall be populated with the text from confirmation_off_plusLBI_IVSU.

4.6.2.6.5.4   CCOIv2-REQ-328975/B-error

error shall populate the wordings for error state pop-ups of promptType "SPCM_CCSM_PROMPT_TYPE_ERROR" to inform the user about the potential cause for an error.

4.6.2.6.5.4.1   CCOIv2-REQ-328976/A-textBody

The text body of the Error Pop-Up shall be populated with this string.

4.6.2.6.5.5   CCOIv2-REQ-329020/B-information

information shall populate the wordings for info pop-ups of promptType "SPCM_CCSM_PROMPT_TYPE_INFORMATION" to inform the user.

4.6.2.6.5.5.1   CCOIv2-REQ-329133/A-textBody

The text body of the information Pop-Up shall be populated with this string.

4.6.2.6.6   CCOIv2-REQ-328977/B-ford_app

For Ford vehicles, the textBody field contains the string, which shall be populated for the %appName% variable.

Ref. REQ-371614-Diagnostic Parameter for Vehicle Brand

4.6.2.6.7   CCOIv2-REQ-328978/B-lincoln_app

For Lincoln vehicles, the textBody field contains the string, which shall be populated for the %appName% variable.

ref. REQ-371614-Diagnostic Parameter for Vehicle Brand

4.6.2.6.8   CCOIv2-REQ-328979/B-ford_brand

For Ford vehicles, the textBody field contains the string, which shall be populated for the %vehicleMake% variable.

ref. REQ-371614-Diagnostic Parameter for Vehicle Brand

4.6.2.6.9 CCOIv2-REQ-328980/B-lincoln_brand

For Lincoln vehicles, the textBody field contains the string, which shall be populated in the %vehicleMake% variable.

ref. REQ-371614-Diagnostic Parameter for Vehicle Brand

4.6.2.6.10 CCOIv2-REQ-328981/B-ford_modemName

For Ford vehicles, the string in the textBody field shall be populated for the %modemName% variable.

ref. REQ-371614-Diagnostic Parameter for Vehicle Brand

4.6.2.6.11 CCOIv2-REQ-328982/B-lincoln_modemName

For Lincoln vehicles, the textBody field contains the string, which shall be populated in the %modemName% variable.

ref. REQ-371614-Diagnostic Parameter for Vehicle Brand

4.6.2.6.12 CCOIv2-REQ-328983/A-Missing content strategy

If not a single dynamic text field (e.g. button1ConfirmationText AND button1ConfirmationTextHeader) on a specific Pop-Up/Info-Book is populated do not show the corresponding Pop-Up/Info-Book pop-up and icon.

If at least one dynamic text field (e.g. initialPrompt: textBody, textBodyHeader) on a specific Pop-Up/Info-Book is populated show the corresponding Pop-Up/Info-Book pop-up and icon.

4.6.2.6.13 CCOIv2-REQ-328984/A-Pop-Up and Info-Book text no truncation

The Pop-Up and Info-Book texts defined in the UFM shall not be truncated to fit into the assigned Pop-Ups (all languages). Therefore it is necessary to dynamically add scroll bars when the text content exceeds the defined pop-up size.

4.6.2.6.14 CCOIv2-REQ-329135/A-pop-up headers (CFM)

All pop-up and screen wordings with the exception of settingsMenuText shall have a parameter "..Header" to populate the wordings for the header of that pop-up and screen.

Examples:
textBody has the corresponding textBodyHeader
infoText has the corresponding infoTextHeader

4.7 CCOIv2-FUN-REQ-296179/B-Notification of data and location sharing

4.7.1 Use Cases

4.7.1.1 *CCOIv2-UC-REQ-296180/C-show data sharing reminder*

Actors	Driver, CCSOnBoardPolicyClient
Pre-conditions	IGN On, CCSOnBoardPolicyClient running
Scenario Description	An entity is active that per policy table requires data and/or location sharing reminder.
Post-conditions	The CCSOnBoardPolicyClient showed a data/location sharing reminder to the driver to inform about the currently shared data/location.
List of Exception Use Cases	
Interfaces	GUI

4.7.1.2 *CCOIv2-UC-REQ-296181/D-show data sharing reminder Pop-Up*

Linked Elements
CCOI-ACT-REQ-351857/A-User identification via paired/connected device for data sharing reminder Pop-Up

Actors	CCSOnBoardPolicyClient, Driver
Pre-conditions	IGN off,
Scenario Description	1. Driver turns IGN on. 2. CCSOnBoardPolicyClient finishes synchronization. 3. An entity, which per policy file requires showing data/location sharing reminder, is active. 4. CCSOnBoardPolicyClient checks, if the popup has already been shown to the specific driver once.
Post-conditions	A data/location sharing Pop-Up is shown once to remind the driver that data is currently shared. If a device is paired the device will be saved as a device that already saw the data sharing reminder.
List of Exception Use Cases	E1: With the current personal device paired, the data/location sharing Pop-Up was already shown. The Pop-Up will not be shown again.
Interfaces	GUI

4.7.2 Requirements

4.7.2.1 *CCOIv2-REQ-362633/A-Data/Location sharing reminder*

There are four different icons for data and location sharing indication:
1) No sharing
2) Data sharing only
3) Location sharing only
4) Location and Data sharing

The conditions for showing data/location sharing reminder icons are defined in the PTE file.
See CCOIv2-REQ-328939 - iconRules for further information.
For applicable Icons see applicable HMI specification H31j, box "Sharing Status Icon".

4.7.2.2 *CCOIv2-REQ-362913/A-Data/Location sharing reminder in error state*

If

OnBoardPolicyServer_St == UnrecoverableSynchronizationError
OR

OnBoardPolicyServer_St == DataStorageError

then the CCSOnBoardPolicyClient shall not display any data/location sharing icon (ref. REQ-362633-Data/Location sharing reminder).

4.7.2.3 CCOIv2-REQ-362914/A-Maintaining an acknowledged device list
The CCSOnBoardPolicyClient shall maintain a list of acknowledged devices.

4.7.2.4 CCOIv2-REQ-362915/A-Definition of acknowledged devices
An acknowledged device is a device, which was connected to the IVI-System while the data/location sharing reminder was presented to the user and has been acknowledged or timed out.

4.7.2.5 CCOIv2-REQ-362916/A-Definition of devices
Devices currently in scope are devices connected via Bluetooth, Wifi or USB (e.g. Projection Mode).

4.7.2.5.1 CCOIv2-REQ-362917/A-USB devices which can get flagged as an acknowledged device
Only devices, which are stored in Projection Mode device lists (e.g. CarPlay, AndroidAuto), are capable to be flagged as an acknowledged USB device.

4.7.2.5.2 CCOIv2-REQ-362918/A-USB devices cannot get flagged as an acknowledged device
Mass storage devices (such as USB-Pendrives or harddrives) and charging only devices cannot be flagged as acknowledged devices.

4.7.2.6 CCOIv2-REQ-362919/A-Waiting for Bluetooth and USB initialization on triggering Data Location Sharing reminder
Before evaluating the connection of a device via USB, Wifi, or Bluetooth the CCSOnBoardPolicyClient shall wait until the Bluetooth, Wifi, and USB connections are initialized.

4.7.2.7 CCOIv2-REQ-362920/B-Do not save devices when screen is deactivated
If the display is deactivated, (e.g. user turned off display immediately after IGN, reverse view camera) the CCSOnBoardPolicyClient shall not save the device as an acknowledged device.

Rationale: since the pop-up will time out while the screen is off the driver cannot see the pop-up.

4.7.2.8 CCOIv2-REQ-362921/A-Do not show data/location sharing reminder if acknowledged device is connected
If an already acknowledged device is connected to IVI-System the CCSOnBoardPolicyClient shall not show the data/location sharing reminder pop-up again.

4.7.2.9 CCOIv2-REQ-362922/A-Remove acknowledged devices from list on Reset
If the driver performs a reset (master/brand connect) the CCSOnBoardPolicyClient shall remove all acknowledged devices from the list.

Hint: Clear user setting command was not mentioned since the CCSOnBoardPolicyClient is not notified about it.

4.7.2.10 CCOIv2-TMR-REQ-362923/A-CCOI_MaxBTDeviceSearchTimeout

Name	Description	Units	Range	Resolution	Default
CCOI_MaxBTDeviceSearchTimeout	Maximum time to wait for a Bluetooth reconnect	sec	-	1	120

4.7.2.11 CCOIv2-TMR-REQ-362924/A-CCOI_DataSharingPopUpTimeout

Name	Description	Units	Range	Resolution	Default
CCOI_DataSharingPopUpTimeout	Please see applicable HMI specification H31j for applicable timer.				

4.7.3   Activity Diagrams

4.7.3.1   CCOIv2-ACT-REQ-362930/A -User identification via paired/connected device for data sharing reminder Pop-Up

waitForIgnitionOn

waitForCCSSystemStartupSynchronization

REQ-328939-iconRules are met — [NO] / [YES]

Bluetooth is On — [YES] / [NO]

BT device listem pty — [NO] / [YES]

BTDeviceConnected — [YES] / [NO]

«interruptibleRegion»
CCOL_MaxBTDeviceSearchTimeout

reconnectSucesful — [YES] / [NO]

waitForBluetoothReconnect

DeviceIsAcknowledgedDevice_ — [YES] / [NO]

DeviceConnectedViaUSBORWifi — [YES] / [NO]

DeviceListedAsProjectionModeDevice — [YES] / [NO]

DeviceIsAcknowledgedDevice — [YES] / [NO]

ScreenON — [YES] / [NO]

REQ-328939-iconRules are still met — [YES] / [NO]

«interruptibleRegion»
CCOL_DataSharingPopUpTimeout

OK button pressed

showPopUp23

Screen OFF

PopUpsShownWithDeviceConnected — [YES] / [NO]

addDeviceToAcknowledgedDeviceList

4.8 CCOIv2-FUN-REQ-386300/A-Network Disconnect (Client)

4.8.1 Use Cases

4.8.1.1 CCOIv2-UC-REQ-306740/D-Network Disconnect

Actors	Driver or Configuration, CCSOnBoardPolicyServer, Cloud
Pre-conditions	bAllow of entity "VehicleConnectivity" is enabled
Scenario Description	1. Driver or default settings or EOL settings disable entity "VehicleConnectivity" 2. CCSOnBoardPolicyServer informs cloud (mobile app) about network disconnect via CCSUpdateAlert
Post-conditions	The Vehicle Connectivity entity is switched off. The cellular and wifi networks are disabled except for projection mode.
List of Exception Use Cases	E1: vehicle configured for eCall and emergency call trigger conditions apply E2: vehicle configured for ERA GLONASS and emergency call trigger conditions apply E3: CCSOnBoardPolicyServer cannot inform cloud (mobile app) about network disconnect within pre-defined time due to no/bad reception. Skip step 2. of the scenario description and disconnect from the network.
Interfaces	

4.8.1.2 CCOIv2-UC-REQ-312154/D-Network Re-Connect

Actors	User or Configuration, CCSOnBoardPolicyServer, Cloud
Pre-conditions	bAllow of entity "VehicleConnectivity" is disabled, vehicle is disconnected from cloud
Scenario Description	1. Driver or default settings or EOL settings enable entity "VehicleConnectivity" 2. CCSOnBoardPolicyServer informs cloud (mobile app) about connection via CCSUpdateAlert
Post-conditions	The VehicleConnectivity entity is switched on. The cellular and wifi networks are enabled.
List of Exception Use Cases	
Interfaces	

4.8.2 Requirements (Client)

4.8.2.1 CCOIv2-REQ-386514/A-Disconnect from Wifi Networks

When the bAllow of "EmbeddedWifiConnectivity" (ID 23, Type 0) is disabled, then all Wifi capable modules shall disable Wifi (exception: projection mode should still be possible).

4.8.2.2 CCOIv2-REQ-386515/A-Reconnect to Wifi Networks

When the bAllow of "EmbeddedWifiConnectivity" (ID 23, Type 0) is enabled, then all Wifi capable modules shall re-enable Wifi.

5   Appendix: Reference Documents

Reference #	Document Title
1	Policy Table Extension
2	Consumer Friendly Messages
3	H31j_SYNC4_Customer_Connectivity_Settings
4	Service Configuration File
5	ECG FINAL FNV2 GCF
6	ecg_spcm_ccsm.proto as "ECG SOA Proto File"
7	fnv_spcm_ccsm_ftcp.proto as "FNV SOA Proto File"
8	sync_spcm_ccsm.proto as "SNYC SOA Proto File"
9	FTCP CCS.proto as "CCS FTCP Proto File"
10	FTCP Authorization.proto as "Authorization FTCP Proto File"