



Function Specification Feature

1

Park Aid System <<Logical Function>>

Document Type	Function Specification (FncS)	
Template Version	6.1a	
SysML Report Version	6.1a.8	
Document ID	FncS	
Document Location		
Document Owner		
Document Revision	FncS0	
Document Status	Draft	
Date Issued	2022/11/28	
Date Revised	2022/11/28	
Document Classification	GIS1 Item Number: 27.60/35	
	GIS2 Classification: Confidential	

Document Approval			
Person	Role	Email Confirmation	Date



Function Specification Feature

This document contains Ford Motor Company Confidential information. Disclosure of the information contained in any portion of this document is not permitted without the expressed, written consent of a duly authorized representative of Ford Motor Company, Dearborn, Michigan, U.S.A.

Copyright © 2022, Ford Motor Company

Printed Copies Are Uncontrolled

Important Note

You need to use the RE specification macros provided by the "RE_SpecificationMacroTemplate.dotm" (refer to "Utilities" on [page "Specification Templates" in the RE Wiki](#)) to allow seamless VSEM import of the specification content. **Use only these RE specification macros to create requirements** in this specification. Refer to "[How to use the Specification Templates](#)" on how to enable and use the macros and the requirements templates in this specification.



Function Specification Feature

CONTENTS

1.1.2	Decomposition of Functional Safety Requirement	Error! Bookmark not defined.
Contents		3
1	Introduction	Error! Bookmark not defined.
1.1	Document Purpose	Error! Bookmark not defined.
1.2	Document Scope	Error! Bookmark not defined.
1.3	Document Audience	Error! Bookmark not defined.
1.3.1	Stakeholder List	Error! Bookmark not defined.
1.4	Document Organization	Error! Bookmark not defined.
1.4.1	Document Context	Error! Bookmark not defined.
1.4.2	Document Structure	Error! Bookmark not defined.
1.5	Document Conventions	Error! Bookmark not defined.
1.5.1	Requirements Templates	Error! Bookmark not defined.
1.6	References	Error! Bookmark not defined.
1.6.1	Ford Documents	Error! Bookmark not defined.
1.6.2	External Documents and Publications	Error! Bookmark not defined.
1.7	Glossary	Error! Bookmark not defined.
1.7.1	Definitions	Error! Bookmark not defined.
1.7.2	Abbreviations	Error! Bookmark not defined.
2	Function Specification	5
2.1	Function Overview	5
2.1.1	Function Description	5
2.1.2	Function Variants	Error! Bookmark not defined.
2.1.3	Input Requirements/Documents	Error! Bookmark not defined.
2.1.4	Assumptions	Error! Bookmark not defined.
2.2	Function Scope	5
2.3	Function Interfaces	Error! Bookmark not defined.
2.3.1	Logical Inputs	Error! Bookmark not defined.
2.3.2	Logical Outputs	Error! Bookmark not defined.
2.3.3	Logical Parameters	Error! Bookmark not defined.
2.4	Function Modeling	7
2.4.1	Use Cases	Error! Bookmark not defined.
2.4.2	State Charts	7
2.4.3	Activity Diagrams	7
2.4.4	Sequence Diagrams	9
2.4.5	Decision Tables	9
2.5	Function requirements	10
2.5.1	Functional Requirements	10
2.5.2	Non-Functional Requirements	31
2.5.3	Functional Safety Requirements	31
2.5.4	Other Requirements	32
3	Open Concerns	33
4	Revision History	34
5	Appendix	35
5.1	Data Dictionary	35
5.1.1	Logical Signals	35
5.1.2	Logical Parameters	35
5.1.3	Encoding Types	35

List of Figures

Figure 1.	Error! Bookmark not defined.
Figure 2: Context Diagram of Function MyLogicalFunction	Error! Bookmark not defined.
Figure 3: State Machine of	Error! Bookmark not defined.
Figure 4: Activity Diagram of	7
Figure 5: Sequence Diagram of	Error! Bookmark not defined.



Function Specification Feature

List of Tables

Table 1: Ford Documents	Error! Bookmark not defined.
Table 2: External Documents and Publications	Error! Bookmark not defined.
Table 3: Definitions relevant for “Logical Function A”	Error! Bookmark not defined.
Table 4: Abbreviations relevant for “Logical Function A”	Error! Bookmark not defined.
Table 5: Input Requirements/Documents	Error! Bookmark not defined.
Table 6: Open Concerns (Not supported by MagicDraw report generation)	Error! Bookmark not defined.



1 FUNCTION SPECIFICATION

1.1 Function Overview


1.1.1 Function Description


Park Aid System

The Park Aid System (PAS) function of Enhancement DAT has made some upgrades compare with Base Park Assist (BPA).

- It only supports ON/OFF the park assist sound, not support ON/OFF the whole park assist function itself.
- It supports to use the radar wall instead of now turtle illustration to show the obstacle approach indication. Only the lvds communication failed, it'll C/O the BPA solution.
- It supports show the front&rear obstacle distance.

1.2 Function Scope

The  – “Park Aid System” function is called by the following functions:

-  – “[I/O Block](#)”

1.2.1 I/O Block



Function Specification Feature

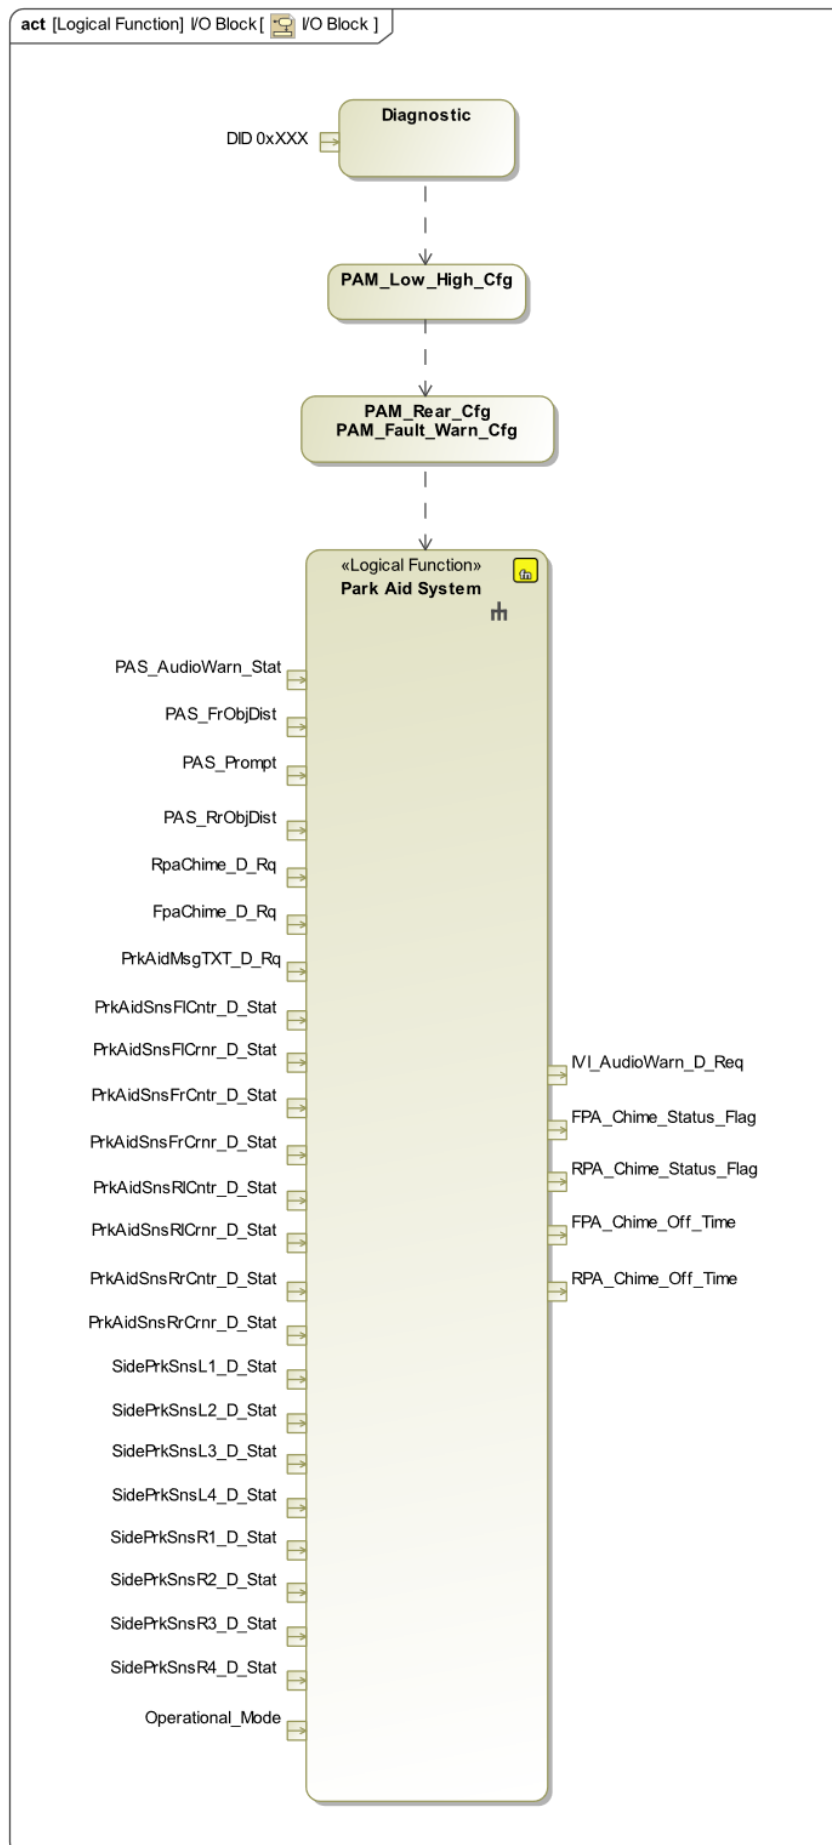




Figure 1: Activity Diagram of  "I/O Block" calling  "Park Aid System"

1.3 Function Modeling

1.3.1 State Charts

No state chart associated to specified function.

1.3.2 Activity Diagrams

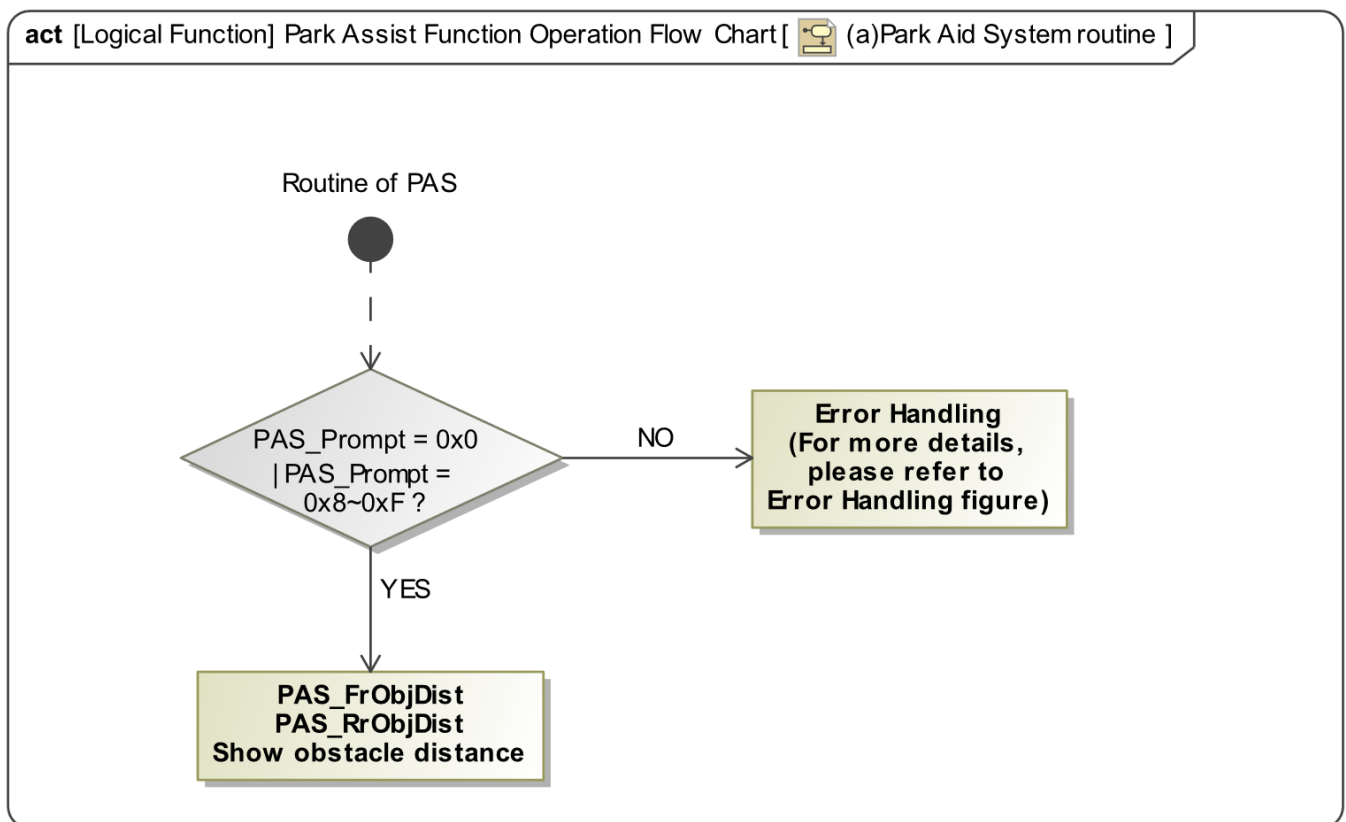


Figure 2: Activity Diagram of (a)Park Aid System routine



Function Specification Feature

act [Logical Function] Park Assist Function Operation Flow Chart [(b)Error Handling Strategy]

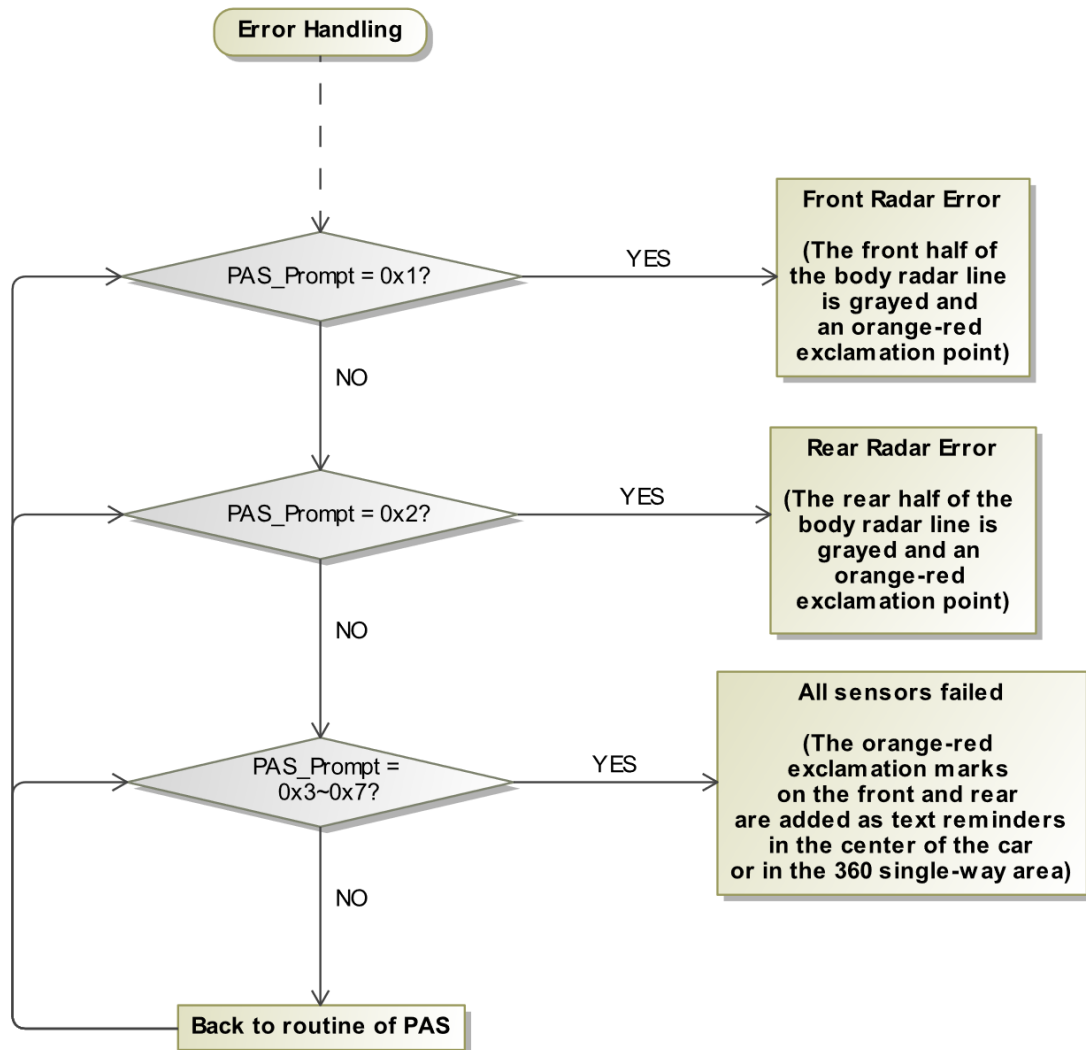


Figure 3: Activity Diagram of (b)Error Handling Strategy



Function Specification Feature

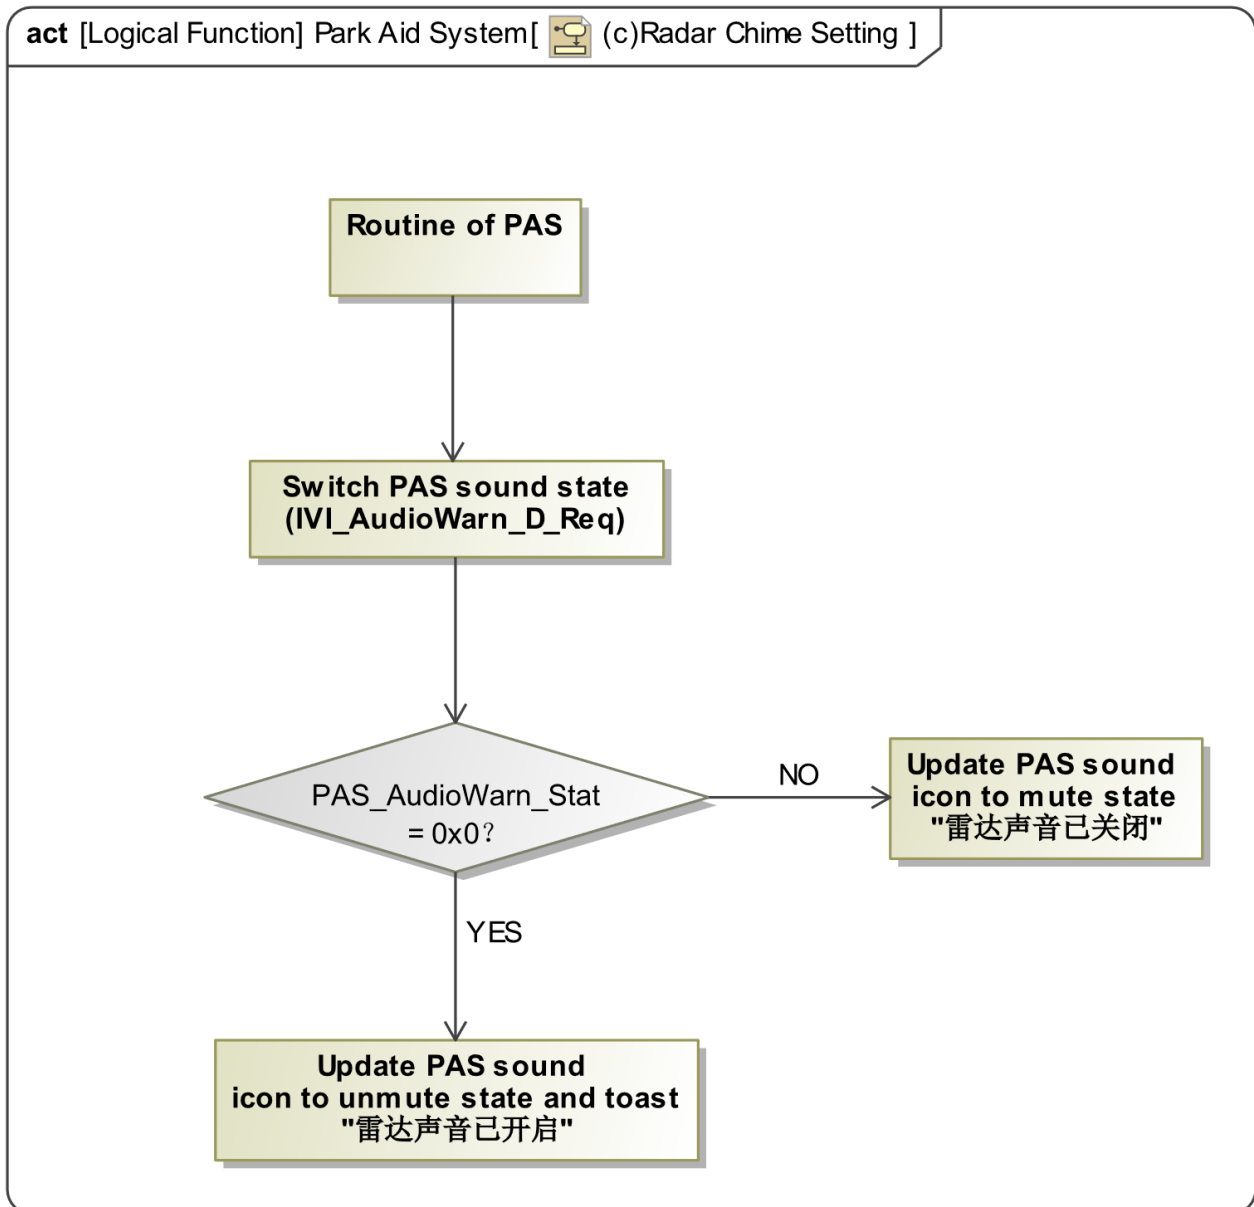


Figure 4: Activity Diagram of (c)Radar Chime Setting

1.3.3 Sequence Diagrams

No sequence diagram associated to specified function.

1.3.4 Decision Tables

No Decision Tables found in the Magicdraw model.



Function Specification Feature

1.4 Function requirements

1.4.1 Functional Requirements

1.4.1.1 Normal Operation

1 Input Signal Details

- INTERNAL:
 - Operational_Mode
 - PAM_Rear_Cfg
 - PAM_Low_High_Cfg(配置子待申請)
 - PAM_Fault_Warn_Cfg
- MUX message on the CAN Bus

Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
RpaChime_D_Rq	4		SED	1	0		0(0x0)	15(0xF)
		No_Chime				0x0		
		Zone1_Chime				0x1		
		Zone2_Chime				0x2		
		Zone3_Chime				0x3		
		Zone4_Chime				0x4		
		Zone5_Chime				0x5		
		Zone6_Chime				0x6		
		Zone7_Chime				0x7		
		Zone8_Chime				0x8		
		Zone9_Chime				0x9		
		Zone10_Chime				0xA		
		Zone11_Chime				0xB		
		Zone12_Chime				0xC		
		Zone13_Chime				0xD		
		Zone14_Chime				0xE		
		Zone15_Chime				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
FpaChime_D_Rq	4		SED	1	0		0(0x0)	15(0xF)
		No_Chime				0x0		
		Zone1_Chime				0x1		
		Zone2_Chime				0x2		
		Zone3_Chime				0x3		
		Zone4_Chime				0x4		
		Zone5_Chime				0x5		
		Zone6_Chime				0x6		
		Zone7_Chime				0x7		
		Zone8_Chime				0x8		
		Zone9_Chime				0x9		
		Zone10_Chime				0xA		
		Zone11_Chime				0xB		



Function Specification Feature

		Zone12_Chime				0xC		
		Zone13_Chime				0xD		
		Zone14_Chime				0xE		
		Zone15_Chime				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidMsgTxt_D_Rq	4			1	0		0(0x0)	15(0xF)
		All Park Sensors OFF				0x0		
		R Snsrs ON - F Snsrs OFF				0x1		
		R Snsrs OFF - F Snsrs ON				0x2		
		Reset Message Warn				0x3		
		Not used				0x4		
		R Snsrs ON - F Snsrs ON				0x5		
		Park Sys Alternate Mode				0x6		
		Not used				0x7		
		R Sns Trlr F Sns Blk				0x8		
		Fail Mode - with chime				0x9		
		Fail Mode - no chime				0xA		
		Not avail (Trlr attchd)				0xB		
		R Sns inactive Trlr atch				0xC		
		R Sns Blk F Sns ON				0xD		
		R Sns ON F Sns Blk				0xE		
		All Sns Blk				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PAS_AudioWarn_Stat	1		unsigned	1	0		0(0x0)	1(0x1)
		AudioWarn				0x0		
		Mute				0x1		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PAS_FrObjDist	7		unsigned	1	0		0(0x0)	127(0x7F)
		0-70cm				0x0-0x46		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PAS_RrObjDist	8		unsigned	1	0		0(0x0)	255(0xFF)



Function Specification Feature

		0-180cm				0x0-0xB4		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PAS_Prompt	4		unsigned	1	0		0(0x0)	15(0xF)
		No request				0x0		
		Front sensor failure				0x1		
		Rear sensor failure				0x2		
		All sensors failed				0x3		
		Front sensor blockage				0x4		
						0x5		
		Rear sensor blockage				0x6		
		All sensors blockage				0x7		
		Reserved				0x8		
		Reserved				0x9		
		Reserved				0xA		
		Reserved				0xB		
		Reserved				0xC		
		Reserved				0xD		
		Reserved				0xE		
		Reserved				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsRICntr_D_S tat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		



Function Specification Feature

Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsRrCntr_D_S tat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsRICnrr_D_S tat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsRrCnrr_D_S tat	4		unsigned	1	0		0(0x0)	15(0xF)



Function Specification Feature

		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsFICntr_D_St at	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsFrCntr_D_S tat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		



Function Specification Feature

		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsFICrn_D_St at	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
PrkAidSnsFrCnr_D_S tat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		



Function Specification Feature

		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsR4_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsL1_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		



Function Specification Feature

Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsL2_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsL3_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsL4_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		



Function Specification Feature

		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsR1_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsR2_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		



Function Specification Feature

		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		
Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Min.	Max.
SidePrkSnsR3_D_Stat	4		unsigned	1	0		0(0x0)	15(0xF)
		Off				0x0		
		Zone1				0x1		
		Zone2				0x2		
		Zone3				0x3		
		Zone4				0x4		
		Zone5				0x5		
		Zone6				0x6		
		Zone7				0x7		
		Zone8				0x8		
		Zone9				0x9		
		Zone10				0xA		
		Zone11				0xB		
		Zone12				0xC		
		Zone13				0xD		
		Zone14				0xE		
		Zone15				0xF		

* PAS_Prompt 信号定义缺失0x5，待后续信号审核同步；

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 1			
Rationale			
Acceptance Criteria			
Notes			
Source			Owner
Source Req.			V&V Method
Type	Priority	Status	In-Progress
Req. Template Version 6.0		End of Requirement	

2 Output Signal Details

- INTERNAL:
 - FPA_Chime_Status_Flag
 - RPA_Chime_Status_Flag
 - FPA_Chime_Off_Time
 - RPA_Chime_Off_Time



Function Specification Feature

- MUX message on the CAN Bus

Signal Name	Size(bits)	Detail	Units	Res.	Offset	State Encoded	Physical Range Min(decimal)	Physical Range Max(decimal)	Initial Value(hex)	Invalid Value(hex)
IVI_AudioWarn_D_Req	1						0	1	0x0	
		ON				0x0				
		OFF				0x1				

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 2					
Rationale					
Acceptance Criteria					
Notes					
Source				Owner	
Source Req.				V&V Method	
Type		Priority		Status	In-Progress
Req. Template Version 6.0					End of Requirement

3 Operational Mode

Mode	Differentiating Vehicle Conditions
Sleep Mode	Park Aid Control Function Text Message Disabled
Limited Mode	Park Aid Control Function Text Message Disabled
Normal Mode	Park Aid Control Function Text Message Enabled / Disabled
Crank Mode	Park Aid Control Function Text Message Enabled / Disabled

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 3					
Rationale					
Acceptance Criteria					
Notes					
Source				Owner	
Source Req.				V&V Method	
Type		Priority		Status	In-Progress
Req. Template Version 6.0					End of Requirement

4 Subsystem Algorithm Flowchart / State Diagram

Table 1.0 State Matrix for Front Park Aid Warning Chime

Operation al	FpaChime_D_Rq Signal	FPA_Chime_Status_Flag	FPA_Chime_Off_Time
--------------	----------------------	-----------------------	--------------------

Document Owner:

20221201

GIS1 Item Number: 27.60/35

GIS2 Classification: Confidential

Page 20 of 36

Document ID: park aid system function specification v1.0

Date Issued: 2022/11/28

Date Revised: 2022/11/28

Copyright ©2021, Ford Motor Company



Function Specification Feature

Mode			
Normal	Zone1_Chime (0x1)	Active (0x1)	0x01
	Zone2_Chime (0x2)	Active (0x1)	0x07
	Zone3_Chime (0x3)	Active (0x1)	0x0A
	Zone4_Chime (0x4)	Active (0x1)	0x0D
	Zone5_Chime (0x5)	Active (0x1)	0x10
	Zone6_Chime (0x6)	Active (0x1)	0x13
	Zone7_Chime (0x7)	Active (0x1)	0x16
	Zone8_Chime (0x8)	Active (0x1)	0x19
	Zone9_Chime (0x9)	Active (0x1)	0x1C
	Zone10_Chime (0xA)	Active (0x1)	0x1F
	Zone11_Chime (0xB)	Active (0x1)	0x22
	Zone12_Chime (0xC)	Active (0x1)	0x25
	Zone13_Chime (0xD)	Active (0x1)	0x28
	Zone14_Chime (0xE)	Active (0x1)	0x2B
	Zone15_Chime (0xF)	Active (0x1)	0x2D
Missing as per 1.4.1		Inactive (0X0)	0x00
All Other Cases		Inactive (0X0)	0x00

Table 1.0 State Matrix for Rear Park Aid Warning Chime

Operational Mode	RpaChime_D_Rq Signal	RPA_Chime_Status_F lag	RPA_Chime_Off_Ti me
Normal	Zone1_Chime (0x1)	Active (0x1)	0x01
	Zone2_Chime (0x2)	Active (0x1)	0x07
	Zone3_Chime (0x3)	Active (0x1)	0x0A
	Zone4_Chime (0x4)	Active (0x1)	0x0D
	Zone5_Chime (0x5)	Active (0x1)	0x10
	Zone6_Chime (0x6)	Active (0x1)	0x13
	Zone7_Chime (0x7)	Active (0x1)	0x16
	Zone8_Chime (0x8)	Active (0x1)	0x19
	Zone9_Chime (0x9)	Active (0x1)	0x1C
	Zone10_Chime (0xA)	Active (0x1)	0x1F
	Zone11_Chime (0xB)	Active (0x1)	0x22
	Zone12_Chime (0xC)	Active (0x1)	0x25
	Zone13_Chime (0xD)	Active (0x1)	0x28
	Zone14_Chime (0xE)	Active (0x1)	0x2B
	Zone15_Chime (0xF)	Active (0x1)	0x2D
Missing as per 1.4.1		Inactive (0X0)	0x00
All Other Cases		Inactive (0X0)	0x00

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 4			
Rationale			
Acceptance Criteria			
Notes			
Source		Owner	



Function Specification Feature

Source Req.		V&V Method	
Type	Priority	Status	In-Progress
Req. Template Version 6.0			End of Requirement

5 Operation Description (supports algorithm flowchart /state diagram)

- The FPA_Chime_Status_Flag, RPA_Chime_Status_Flag, FPA_Chime_Off_Time, and RPA_Chime_Off_Time are set, maintained and cleared by this Chime software module.
- Shall sound the chime as per the Chime Arbitrator section of this SPSS.
- The FPA/RPA off time between chimes varies by distance from the obstruction that it is detecting. Obstructions with a closer proximity will have a smaller off time.

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 5			
Rationale			
Acceptance Criteria			
Notes			
Source		Owner	
Source Req.		V&V Method	
Type	Priority	Status	In-Progress
Req. Template Version 6.0			End of Requirement

6 Indicator Color Coordinates

None

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 6			
Rationale			
Acceptance Criteria			
Notes			
Source		Owner	
Source Req.		V&V Method	
Type	Priority	Status	In-Progress
Req. Template Version 6.0			End of Requirement

7 Indicator Characteristics

None

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 7			
Rationale			
Acceptance Criteria			
Notes			
Source		Owner	
Source Req.		V&V Method	
Type	Priority	Status	In-Progress



Function Specification Feature

[Req. Template](#) Version 6.0

End of Requirement

8 Audio

Refer to Audio Section in Chimes & Chime Arbitrator SPSS Section.

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 8

Rationale				
Acceptance Criteria				
Notes				
Source			Owner	
Source Req.			V&V Method	
Type		Priority	Status	In-Progress

[Req. Template](#) Version 6.0

End of Requirement

9 Switch Control Logic

Consumer access to Park Aid Module Configuration shall be as specified in the message center basic functionality display as specified in Message Center X Display_Y Button Interface Section, where X and Y are appropriate values in this document.

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 9

Rationale				
Acceptance Criteria				
Notes				
Source			Owner	
Source Req.			V&V Method	
Type		Priority	Status	In-Progress

[Req. Template](#) Version 6.0

End of Requirement

10 System Accuracy

Within 100 msec of receiving a message that results in a change of state the cluster will update the display to the proper state.

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 10

Rationale				
Acceptance Criteria				
Notes				
Source			Owner	
Source Req.			V&V Method	
Type		Priority	Status	In-Progress

[Req. Template](#) Version 6.0

End of Requirement

11 Memory Storage

Document Owner:

Page 23 of 36

Document ID: park aid system function specification v1.0

20221201

GIS1 Item Number: 27.60/35

GIS2 Classification: Confidential

Copyright ©2021, Ford Motor Company

Date Issued: 2022/11/28

Date Revised: 2022/11/28



Function Specification Feature

Parameter Name	Description	Value at Battery Connect	Value at Module Wake-up	Value at Transition to Normal/Crank Mode From Limited Mode
Operational_Mode	4 state indicator for cluster operational mode	Limited	Limited, Normal or Crank	Normal or Crank
PAM_Rear_Cfg	Configures cluster to allow Rear Park Aid pop up warning display in cluster when vehicle is in reverse. Set to disabled at Cluster Supplier Manufacturing Plant.	Do Not Init	Do Not Init	Do Not Init
PAM_Low_High_Cfg(配置字待申请)				
PAM_Fault_Warn_Cfg	Allows RPA/FPA "Check Park Aid" fault warning in cluster. Set to disabled at Cluster Supplier Manufacturing Plant.	Do Not Init	Do Not Init	Do Not Init
RpaChime_D_Rq	Input CAN signal sent from the ACU	No_Chime (0x0)	No_Chime (0x0)	Do Not Init
FpaChime_D_Rq	Input CAN signal sent from the ACU	No_Chime (0x0)	No_Chime (0x0)	Do Not Init
PrkAidMsgTxt_D_Rq	Indicates system status to cluster	R Snsrs ON - F Snsrs ON(0x5)	R Snsrs ON - F Snsrs ON(0x5)	Do Not Init
PAS_AudioWarn_Stat	This signal indicates the muting states from PAS feature.	non-mute(0x0)	non-mute(0x0)	Do Not Init
PAS_FrObjDist	This is obstacle distance from front area of the host	Unshow distance(0x7E)	Unshow distance(0x7E)	Do Not Init



Function Specification Feature

	vehicle,unit in cm			
PAS_RrObjDist	This is obstacle distance from rear area of the host vehicle,unit in cm	Unshow distance(0x7E)	Unshow distance(0x7E)	Do Not Init
PAS_Prompt	This signal indicates the status of ultrasonic sensor which supports PAS feature. e.g if any of six front ultrasonic sensor is failed, the value = 0x1 shall be send out and a warning icon shall be provided to driver.	No request(0x0)	No request(0x0)	Do Not Init
PrkAidSnsRlCntr_D_Stat	Range Data - Rear Center Left Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
PrkAidSnsRrCntr_D_Stat	Range Data - Rear Center Right Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
PrkAidSnsRlCntr_D_Stat	Range Data - Rear Corner Left Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
PrkAidSnsRrCntr_D_Stat	Range Data - Rear Corner Right Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
PrkAidSnsFlCntr_D_Stat	Range Data - Front Left Center Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init



Function Specification Feature

PrkAidSnsFrCntr_D_Stat	Range Data - Front Right Center Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
PrkAidSnsFICnr_D_Stat	Range Data - Front Left Corner Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
PrkAidSnsFrCnr_D_Stat	Range Data - Front Right Corner Park Aid sensor	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsR4_D_Stat	Distance to closest object measured/calculated in fourth sector on right side.	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsL1_D_Stat	Distance to closest object measured/calculated in first sector on left side.	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsL2_D_Stat	Distance to closest object measured/calculated in second sector on left side.	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsL3_D_Stat	Distance to closest object measured/calculated in third sector on left side.	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsL4_D_Stat	Distance to closest object measured/calculated in fourth sector on left side.	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsR2_D_Stat	Distance to closest object measured/calculated in second sector on right side.	Off(0x0)	Off(0x0)	Do Not Init



Function Specification Feature

SidePrkSnsR3_D_Stat	Distance to closest object measured/calculated in third sector on right side.	Off(0x0)	Off(0x0)	Do Not Init
SidePrkSnsR1_D_Stat	Distance to closest object measured/calculated in first sector on right side.	Off(0x0)	Off(0x0)	Do Not Init
FPA_Chime_Status_Flag	Informs the Chime Arbitrator when the chime needs to be played.	Inactive (0x0)	Inactive (0x0)	Do Not Init
RPA_Chime_Status_Flag	Informs the Chime Arbitrator when the chime needs to be played.	Inactive (0x0)	Inactive (0x0)	Do Not Init
FPA_Chime_Off_Time	State variable used by the Chime Arbitrator to determine the off time between FPA chimes	Inactive (0x0)	Inactive (0x0)	Do Not Init
RPA_Chime_Off_Time	State variable used by the Chime Arbitrator to determine the off time between RPA chimes	Inactive (0x0)	Inactive (0x0)	Do Not Init
PA_Warn_Flg	State variable used by M/C Warning Arbitrator.	INACTIVE	INACTIVE	INACTIVE
IVI_AudioWarn_D_Req	This signal indicates if driver presses the button to turn on/off audio warning.	ON (0x0)	ON (0x0)	ON (0x0)

Satisfied by:

- Functions:
 - Park Aid System



Function Specification Feature

Requirement ID: 11

Rationale				
Acceptance Criteria				
Notes				
Source		Owner		
Source Req.		V&V Method		
Type		Priority	Status	In-Progress
Req. Template Version 6.0				End of Requirement

12 Prove Out

None

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 12

Rationale				
Acceptance Criteria				
Notes				
Source		Owner		
Source Req.		V&V Method		
Type		Priority	Status	In-Progress
Req. Template Version 6.0				End of Requirement

13 Message Center Msg

Refer to Message Center Function description reference Message ID W157, W158, W585

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 13

Rationale				
Acceptance Criteria				
Notes				
Source		Owner		
Source Req.		V&V Method		
Type		Priority	Status	In-Progress
Req. Template Version 6.0				End of Requirement

14 Self Test

None

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 14

Rationale				
Acceptance Criteria				
Notes				
Source		Owner		
Source Req.		V&V Method		

Document Owner:

20221201

GIS1 Item Number: 27.60/35

GIS2 Classification: Confidential

Page 28 of 36

Document ID: park aid system function specification v1.0

Date Issued: 2022/11/28

Date Revised: 2022/11/28

Copyright ©2021, Ford Motor Company



Function Specification Feature

Type		Priority		Status	In-Progress
Req. Template	Version 6.0				End of Requirement

15 Engineering Test Mode

Reference section "Dealer / Engineering Test Mode (ETM)"

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 15					
Rationale					
Acceptance Criteria					
Notes					
Source				Owner	
Source Req.				V&V Method	
Type		Priority		Status	In-Progress
Req. Template	Version 6.0				End of Requirement

16 Part II Performance

Supported Diagnostic Trouble Codes (DTCs)

DTC	Description
C15900(tbd)	Lost of Communication with IPAMB
CXXXX(tbd)	Invalid Data

DID 0xDExx

Block Num	Block Description	Byte(s)	Bits	State: Description	"0"	"1"	Default	Comments/Information
PACKETED BLOCKS								

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 16					
Rationale					
Acceptance Criteria					
Notes					
Source				Owner	
Source Req.				V&V Method	

Document Owner:

20221201

GIS1 Item Number: 27.60/35

GIS2 Classification: Confidential

Page 29 of 36

Document ID: park aid system function specification v1.0

Date Issued: 2022/11/28

Date Revised: 2022/11/28

Copyright ©2021, Ford Motor Company



Function Specification Feature

Type		Priority		Status	In-Progress
Req. Template	Version 6.0				End of Requirement

17 Reference Specification

- Func. Criticality EC-0048
- Mod. PWR-up / Reset EC-0049
- Low-High Vol. Perform. EC-0058
- Oper. Voltage Perf. IS-0052
- Oper. Voltage Func. IS-0053
- Evaluation IS-0327
- Flickering of Lamps IS-0329
- MC - Gen. Rqmts. IS-0344
- Status Ind. Visibility SY-0046
- Feedback 17-0124
- SAFETY – CHIME ARBITRATOR EF-0033
- NORTH AMERICAN WARNINGS AND INDICATORS STRATEGY IS-0379

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 17					
Rationale					
Acceptance Criteria					
Notes					
Source				Owner	
Source Req.				V&V Method	
Type		Priority		Status	In-Progress
Req. Template	Version 6.0				End of Requirement

18 Voltage Levels

Refer to the Cluster Features table located in the Operational Modes and Voltage Range Strategies Section in this SPSS.

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID: 18					
Rationale					
Acceptance Criteria					
Notes					
Source				Owner	
Source Req.				V&V Method	
Type		Priority		Status	In-Progress
Req. Template	Version 6.0				End of Requirement

19 Indicator Graphics / Display Format

None

Satisfied by:

- Functions:
 - Park Aid System



Function Specification Feature

Requirement ID: 19

Rationale				
Acceptance Criteria				
Notes				
Source			Owner	
Source Req.			V&V Method	
Type		Priority	Status	In-Progress
Req. Template	Version	6.0	End of Requirement	

1.4.1.2 Error Handling

Missing Message Strategy

The signals will be declared missing as per the Diagnostics section of this SPSS.

DTCs states and history will be determined as per the Diagnostics section of this SPSS.

If **PAM_Fault_Warn_Cfg** is "Disabled", the cluster shall never log a missing message DTC for this feature.

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID:

Rationale				
Acceptance Criteria				
Notes				
Source			Owner	
Source Req.			V&V Method	
Type		Priority	Status	In-Progress
Req. Template	Version	6.0	End of Requirement	

1.4.2 Non-Functional Requirements

No Non-Functional Requirements specified.

1.4.3 Functional Safety Requirements

Function Safety Classification (EMC)

B

Satisfied by:

- Functions:
 - Park Aid System

Requirement ID:

Rationale				
Acceptance Criteria				
Notes				
Source			Owner	
Source Req.			V&V Method	
Type		Priority	Status	In-Progress
Req. Template	Version	6.0	End of Requirement	



1.4.4 Other Requirements

No Other Requirements specified.

1.4.4.1 Design Requirements

No Design Requirements specified.



2 OPEN CONCERNS

No Open Concerns (Ford Modeling Action Items) in the Magicdraw model.



3 REVISION HISTORY

No Revision History found.



4 APPENDIX

4.1 Data Dictionary

4.1.1 Logical Signals

No "Logical Interface Table" or "Logical Signals" tables found.

4.1.2 Logical Parameters

(No parameters have been defined)

4.1.3 Encoding Types



Function Specification Feature

Document ends here.