# OLIST E-COMMERCE SQL BUSINESS ANALYSIS



# SECTION 1 – ORDERS & CUSTOMER ANALYSIS

## 1] How many total orders are present in the Olist dataset?

SQL QUERY SCREENSHOT :-

```sql
SELECT
    COUNT(*) AS total_orders
FROM dbo.olist_orders_dataset;
```

QUERY OUTPUT SCREENSHOT :-

| | total_orders |
|---|---|
| 1 | 99441 |



# SECTION 1 – ORDERS & CUSTOMER ANALYSIS

## 2] How many unique customers have placed orders?

SQL QUERY SCREENSHOT :-

```sql
SELECT
    COUNT(DISTINCT customer_unique_id) AS Unique_Customers
FROM olist_customers_dataset;
```

QUERY OUTPUT SCREENSHOT :-

| | Unique_Customers |
|---|---|
| 1 | 96096 |



# SECTION 1 – ORDERS & CUSTOMER ANALYSIS

## 3] What is the distribution of orders across different order statuses?

SQL QUERY SCREENSHOT :-

```sql
SELECT
    order_status,
    COUNT(DISTINCT order_id) AS Total_Orders
FROM olist_orders_dataset
GROUP BY order_status
ORDER BY Total_Orders DESC;
```

QUERY OUTPUT SCREENSHOT :-

| | order_status | Total_Orders |
|---|---|---|
| 1 | delivered | 96478 |
| 2 | shipped | 1107 |
| 3 | canceled | 625 |
| 4 | unavailable | 609 |
| 5 | invoiced | 314 |
| 6 | processing | 301 |
| 7 | created | 5 |
| 8 | approved | 2 |



# SECTION 1 – ORDERS & CUSTOMER ANALYSIS

## 4] Which customers have placed more than one order?

### SQL QUERY SCREENSHOT :-

```sql
SELECT
    c.customer_unique_id,
    COUNT(DISTINCT o.order_id) AS Total_Orders
FROM olist_customers_dataset c
INNER JOIN olist_orders_dataset o
    ON c.customer_id = o.customer_id
GROUP BY c.customer_unique_id
HAVING COUNT(DISTINCT o.order_id) > 1
ORDER BY Total_Orders DESC;
```

### QUERY OUTPUT SCREENSHOT :-

| | customer_unique_id | Total_Orders |
|---|---|---|
| 1 | 8d50f5eadf50201ccdcedfb9e2ac8455 | 17 |
| 2 | 3e43e6105506432c953e165fb2acf44c | 9 |
| 3 | 6469f99c1f9dfae7733b25662e7f1782 | 7 |
| 4 | 1b6c7548a2a1f9037c1fd3ddfed95f33 | 7 |
| 5 | ca77025e7201e3b30c44b472ff346268 | 7 |
| 6 | f0e310a6839dce9de1638e0fe5ab282a | 6 |
| 7 | 63cfc61cee11cbe306bff5857d00bfe4 | 6 |
| 8 | 47c1a3033b8b77b3ab6e109eb4d5fdf3 | 6 |
| 9 | 12f5d6e1cbf93dafd9dcc19095df0b3d | 6 |
| 10 | dc813062e0fc23409cd255f7f53c7074 | 6 |
| 11 | de34b16117594161a6a89c50b289d35a | 6 |
| 12 | 56c8638e7c058b98aae6d74d2dd6ea23 | 5 |
| 13 | 5e8f38a9a1c023f3db718edcf926a2db | 5 |
| 14 | fe81bb32c243a86b2f86fbf053fe6140 | 5 |
| 15 | 35ecdf6858edc6427223b64804cf028e | 5 |
| 16 | 394ac4de8f3acb14253c177f0e15bc58 | 5 |

### BUSINESS INSIGHTS :-

*THERE ARE 2,997 ROWS SHOWN IN OUTPUT SCREENSHOT*



# SECTION 2 – SALES & PAYMENT ANALYSIS

## 5] What is the total revenue generated from all customer payments?

### SQL QUERY SCREENSHOT :-

```
SELECT
    FORMAT(SUM(payment_value)/1000000.0, 'N2') + 'M' AS Total_Payment_Revenue
FROM olist_order_payments_dataset;
```

### QUERY OUTPUT SCREENSHOT :-

| | Total_Payment_Revenue |
|---|---|
| 1 | 16.01M |

### BUSINESS INSIGHTS :-

*TOTAL REVENUE GENERATED IS 16 M*



# SECTION 2 – SALES & PAYMENT ANALYSIS

## 6] What is the Average Order Value (AOV)?

SQL QUERY SCREENSHOT :-

```sql
SELECT
    SUM(p.payment_value) /
    COUNT(DISTINCT o.order_id) AS Average_Order_Value
FROM olist_order_payments_dataset p
INNER JOIN olist_orders_dataset o
    ON p.order_id = o.order_id;
```

QUERY OUTPUT SCREENSHOT :-

| | Average_Order_Value |
|---|---|
| 1 | 160.990266694035 |



# SECTION 2 – SALES & PAYMENT ANALYSIS

## 7] What is the monthly revenue trend?

### SQL QUERY SCREENSHOT :-

```sql
SELECT
    YEAR(o.order_purchase_timestamp) AS Order_Year,
    MONTH(o.order_purchase_timestamp) AS Order_Month,
    ROUND(SUM(p.payment_value),2) AS Monthly_Revenue
FROM olist_orders_dataset o
INNER JOIN olist_order_payments_dataset p
    ON o.order_id = p.order_id
GROUP BY
    YEAR(o.order_purchase_timestamp),
    MONTH(o.order_purchase_timestamp)
ORDER BY
    Order_Year,
    Order_Month;
```

### QUERY OUTPUT SCREENSHOT :-

| | Order_Year | Order_Month | Monthly_Revenue |
|---|---|---|---|
| 1 | 2016 | 9 | 252.24 |
| 2 | 2016 | 10 | 59090.48 |
| 3 | 2016 | 12 | 19.62 |
| 4 | 2017 | 1 | 138488.04 |
| 5 | 2017 | 2 | 291908.01 |
| 6 | 2017 | 3 | 449863.6 |
| 7 | 2017 | 4 | 417788.03 |
| 8 | 2017 | 5 | 592918.82 |
| 9 | 2017 | 6 | 511276.38 |
| 10 | 2017 | 7 | 592382.92 |
| 11 | 2017 | 8 | 674396.32 |
| 12 | 2017 | 9 | 727762.45 |
| 13 | 2017 | 10 | 779677.88 |
| 14 | 2017 | 11 | 1194882.8 |
| 15 | 2017 | 12 | 878401.48 |
| 16 | 2018 | 1 | 1115004.18 |
| 17 | 2018 | 2 | 992463.34 |
| 18 | 2018 | 3 | 1159652.12 |
| 19 | 2018 | 4 | 1160785.48 |
| 20 | 2018 | 5 | 1153982.15 |
| 21 | 2018 | 6 | 1023880.5 |
| 22 | 2018 | 7 | 1066540.75 |
| 23 | 2018 | 8 | 1022425.32 |
| 24 | 2018 | 9 | 4439.54 |
| 25 | 2018 | 10 | 589.67 |



# SECTION 2 – SALES & PAYMENT ANALYSIS

## 8] Which payment methods are most commonly used, and what is their total payment value?

### SQL QUERY SCREENSHOT :-

```sql
SELECT
    payment_type,
    COUNT(*) AS Total_Payment_Records,
    COUNT(DISTINCT order_id) AS Total_Orders,
    FORMAT(SUM(payment_value)/1000000.0, 'N2') + 'M' AS Total_Payment_Value
FROM olist_order_payments_dataset
GROUP BY payment_type
ORDER BY Total_Payment_Records DESC;
```

### QUERY OUTPUT SCREENSHOT :-

| | payment_type | Total_Payment_Records | Total_Orders | Total_Payment_Value |
|---|---|---|---|---|
| 1 | credit_card | 76795 | 76505 | 12.54M |
| 2 | boleto | 19784 | 19784 | 2.87M |
| 3 | voucher | 5775 | 3866 | 0.38M |
| 4 | debit_card | 1529 | 1528 | 0.22M |
| 5 | not_defined | 3 | 3 | 0.00M |



# SECTION 3 – PRODUCT & CATEGORY ANALYSIS

## 9] Which product categories generate the highest sales?

### SQL QUERY SCREENSHOT :-

```sql
SELECT TOP 10
    COALESCE(
        t.product_category_name_english,
        p.product_category_name,
        'Unknown'
    ) AS Product_Category,
    FORMAT(SUM(oi.price)/1000000.0, 'N2') + 'M' AS Total_Item_Sales
FROM olist_order_items_dataset oi
INNER JOIN olist_products_dataset p
    ON oi.product_id = p.product_id
LEFT JOIN product_category_name_translation t
    ON p.product_category_name = t.product_category_name
GROUP BY
    COALESCE(
        t.product_category_name_english,
        p.product_category_name,
        'Unknown'
    )
ORDER BY Total_Item_Sales DESC;
```

### QUERY OUTPUT SCREENSHOT :-

| | Product_Category | Total_Item_Sales |
|---|---|---|
| 1 | health_beauty | 1.26M |
| 2 | watches_gifts | 1.21M |
| 3 | bed_bath_table | 1.04M |
| 4 | sports_leisure | 0.99M |
| 5 | computers_accessories | 0.91M |
| 6 | furniture_decor | 0.73M |
| 7 | cool_stuff | 0.64M |
| 8 | housewares | 0.63M |
| 9 | auto | 0.59M |
| 10 | garden_tools | 0.49M |



# SECTION 3 – PRODUCT & CATEGORY ANALYSIS

## 10] How many orders are associated with each product category?

### SQL QUERY SCREENSHOT :-

```sql
SELECT
    COALESCE(
        t.product_category_name_english,
        p.product_category_name,
        'Unknown'
    ) AS Product_Category,
    COUNT(DISTINCT oi.order_id) AS Total_Orders
FROM olist_order_items_dataset oi
INNER JOIN olist_products_dataset p
    ON oi.product_id = p.product_id
LEFT JOIN product_category_name_translation t
    ON p.product_category_name = t.product_category_name
GROUP BY
    COALESCE(
        t.product_category_name_english,
        p.product_category_name,
        'Unknown'
    )
ORDER BY Total_Orders DESC;
```

### QUERY OUTPUT SCREENSHOT :-

| | Product_Category | Total_Orders |
|---|---|---|
| 1 | bed_bath_table | 9417 |
| 2 | health_beauty | 8836 |
| 3 | sports_leisure | 7720 |
| 4 | computers_accessories | 6689 |
| 5 | furniture_decor | 6449 |
| 6 | housewares | 5884 |
| 7 | watches_gifts | 5624 |
| 8 | telephony | 4199 |
| 9 | auto | 3897 |
| 10 | toys | 3886 |
| 11 | cool_stuff | 3632 |
| 12 | garden_tools | 3518 |
| 13 | perfumery | 3162 |
| 14 | baby | 2885 |
| 15 | electronics | 2550 |
| 16 | stationery | 2311 |
| 17 | fashion_bags_accessories | 1864 |
| 18 | pet_shop | 1710 |

### BUSINESS INSIGHTS:-

*THERE ARE 74 ROWS OF PRODUCT CATEGORY.*



# SECTION 4 – DELIVERY PERFORMANCE ANALYSIS

## 11] What is the average delivery time from order purchase to customer delivery?

SQL QUERY SCREENSHOT :-

```
SELECT
    ROUND(AVG(
        CAST(
            DATEDIFF(
                SECOND,
                order_purchase_timestamp,
                order_delivered_customer_date
            ) AS FLOAT
        ) / 86400.0
    ),2) AS Average_Delivery_Days
FROM olist_orders_dataset
WHERE order_delivered_customer_date IS NOT NULL
  AND order_purchase_timestamp IS NOT NULL;
```

QUERY OUTPUT SCREENSHOT :-

| | Average_Delivery_Days |
|---|---|
| 1 | 12.56 |



BUSINESS INSIGHTS:-

*SO THE AVERAGE DELIVERY TIME IS 12.56.*

# SECTION 4 – DELIVERY PERFORMANCE ANALYSIS


## 12] How many orders were delivered, canceled, unavailable, or not completed?

SQL QUERY SCREENSHOT :-

```sql
SELECT
    CASE
        WHEN order_status = 'delivered' THEN 'Delivered'
        WHEN order_status = 'canceled' THEN 'Canceled'
        WHEN order_status = 'unavailable' THEN 'Unavailable'
        ELSE 'Not Completed'
    END AS Order_Category,
    COUNT(DISTINCT order_id) AS Total_Orders
FROM olist_orders_dataset
GROUP BY
    CASE
        WHEN order_status = 'delivered' THEN 'Delivered'
        WHEN order_status = 'canceled' THEN 'Canceled'
        WHEN order_status = 'unavailable' THEN 'Unavailable'
        ELSE 'Not Completed'
    END
ORDER BY Total_Orders DESC;
```

QUERY OUTPUT SCREENSHOT :-

| | Order_Category | Total_Orders |
|---|---|---|
| 1 | Delivered | 96478 |
| 2 | Not Completed | 1729 |
| 3 | Canceled | 625 |
| 4 | Unavailable | 609 |

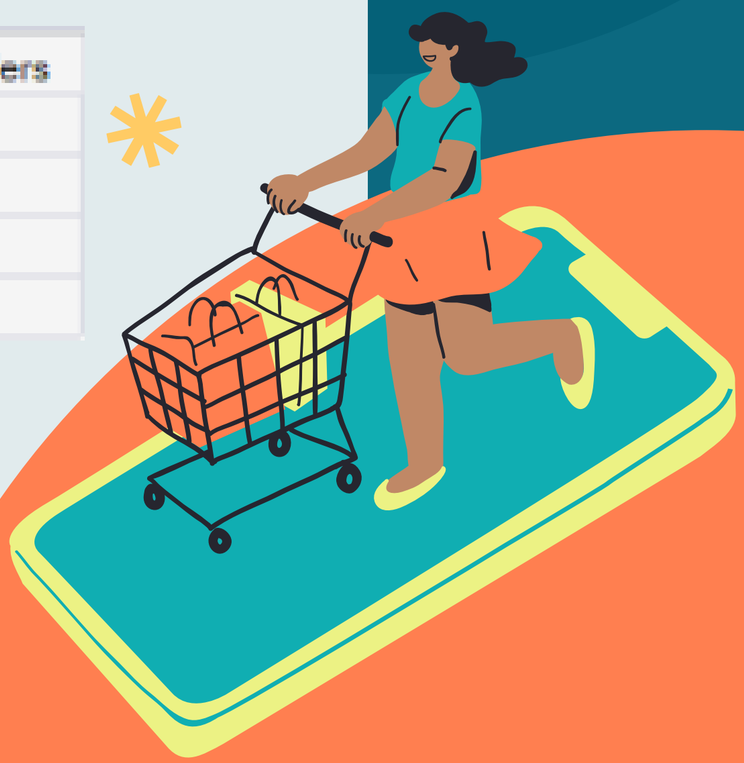

# SECTION 4 – DELIVERY PERFORMANCE ANALYSIS

## 13] How many orders were delivered early, late, or exactly on the estimated delivery date?

SQL QUERY SCREENSHOT :-

```sql
SELECT
    CASE
        WHEN order_delivered_customer_date >
             order_estimated_delivery_date
            THEN 'Late'

        WHEN order_delivered_customer_date =
             order_estimated_delivery_date
            THEN 'On Time'

        WHEN order_delivered_customer_date <
             order_estimated_delivery_date
            THEN 'Early'
    END AS Delivery_Performance,
    COUNT(DISTINCT order_id) AS Total_Orders
FROM olist_orders_dataset
WHERE order_status = 'delivered'
  AND order_delivered_customer_date IS NOT NULL
  AND order_estimated_delivery_date IS NOT NULL
GROUP BY
    CASE
        WHEN order_delivered_customer_date >
             order_estimated_delivery_date
            THEN 'Late'

        WHEN order_delivered_customer_date =
             order_estimated_delivery_date
            THEN 'On Time'

        WHEN order_delivered_customer_date <
             order_estimated_delivery_date
            THEN 'Early'
    END
ORDER BY Total_Orders DESC;
```

QUERY OUTPUT SCREENSHOT :-

| | Delivery_Performance | Total_Orders |
|---|---|---|
| 1 | Early | 88644 |
| 2 | Late | 7826 |



# SECTION 4 – DELIVERY PERFORMANCE ANALYSIS

## 14] Which customer states have the highest late-delivery percentage?

### SQL QUERY SCREENSHOT :-

```sql
WITH DeliveryData AS
(
    SELECT
        c.customer_state,
        o.order_id,
        CASE
            WHEN o.order_delivered_customer_date >
                 o.order_estimated_delivery_date
                THEN 'Late'
            WHEN o.order_delivered_customer_date <
                 o.order_estimated_delivery_date
                THEN 'Early'
        END AS Delivery_Performance
    FROM olist_orders_dataset o
    INNER JOIN olist_customers_dataset c
        ON o.customer_id = c.customer_id
    WHERE o.order_status = 'delivered'
      AND o.order_delivered_customer_date IS NOT NULL
      AND o.order_estimated_delivery_date IS NOT NULL
)
SELECT
    customer_state,
    COUNT(DISTINCT order_id) AS Total_Orders,
    COUNT(DISTINCT CASE
        WHEN Delivery_Performance = 'Late'
        THEN order_id END) AS Late_Orders,
    CAST(
        100.0 * COUNT(DISTINCT CASE
            WHEN Delivery_Performance = 'Late'
            THEN order_id END)
        / NULLIF(COUNT(DISTINCT order_id), 0)
        AS DECIMAL(10,2)
    ) AS Late_Delivery_Percentage
FROM DeliveryData
WHERE Delivery_Performance IN ('Late', 'Early')
GROUP BY customer_state
ORDER BY Late_Delivery_Percentage DESC;
```

### QUERY OUTPUT SCREENSHOT :-

| | customer_state | Total_Orders | Late_Orders | Late_Delivery_Percentage |
|---|---|---|---|---|
| 1 | AL | 397 | 95 | 23.93 |
| 2 | MA | 717 | 141 | 19.67 |
| 3 | PI | 476 | 76 | 15.97 |
| 4 | CE | 1279 | 196 | 15.32 |
| 5 | SE | 335 | 51 | 15.22 |
| 6 | BA | 3256 | 457 | 14.04 |
| 7 | RJ | 12350 | 1664 | 13.47 |
| 8 | TO | 274 | 35 | 12.77 |
| 9 | PA | 946 | 117 | 12.37 |
| 10 | ES | 1995 | 244 | 12.23 |
| 11 | RR | 41 | 5 | 12.20 |
| 12 | MS | 701 | 81 | 11.55 |
| 13 | PB | 517 | 57 | 11.03 |
| 14 | PE | 1593 | 172 | 10.80 |
| 15 | RN | 474 | 51 | 10.76 |
| 16 | SC | 3546 | 346 | 9.76 |
| 17 | GO | 1957 | 160 | 8.18 |
| 18 | RS | 5344 | 382 | 7.15 |
| 19 | DF | 2080 | 147 | 7.07 |
| 20 | MT | 886 | 60 | 6.77 |
| 21 | SP | 40494 | 2387 | 5.89 |
| 22 | MG | 11354 | 637 | 5.61 |
| 23 | PR | 4923 | 246 | 5.00 |
| 24 | AP | 67 | 3 | 4.48 |
| 25 | AM | 145 | 6 | 4.14 |
| 26 | AC | 80 | 3 | 3.75 |
| 27 | RO | 243 | 7 | 2.88 |



# SECTION 4 – DELIVERY PERFORMANCE ANALYSIS

## 15] Which product categories have the highest late-delivery percentage?

### SQL QUERY SCREENSHOT :-

```sql
WITH DeliveryData AS
(
    SELECT
        COALESCE(
            t.product_category_name_english,
            p.product_category_name,
            'Unknown'
        ) AS Product_Category,
        oi.order_id,
        CASE
            WHEN o.order_delivered_customer_date >
                 o.order_estimated_delivery_date
                THEN 'Late'
            WHEN o.order_delivered_customer_date <
                 o.order_estimated_delivery_date
                THEN 'Early'
        END AS Delivery_Performance
    FROM olist_orders_dataset o
    INNER JOIN olist_order_items_dataset oi
        ON o.order_id = oi.order_id
    INNER JOIN olist_products_dataset p
        ON oi.product_id = p.product_id
    LEFT JOIN product_category_name_translation t
        ON p.product_category_name = t.product_category_name
    WHERE o.order_status = 'delivered'
      AND o.order_delivered_customer_date IS NOT NULL
      AND o.order_estimated_delivery_date IS NOT NULL
)
SELECT
    Product_Category,
    COUNT(DISTINCT order_id) AS Total_Orders,
    COUNT(DISTINCT CASE
        WHEN Delivery_Performance = 'Late'
        THEN order_id END) AS Late_Orders,
    CAST(
        100.0 * COUNT(DISTINCT CASE
            WHEN Delivery_Performance = 'Late'
            THEN order_id END)
        / NULLIF(COUNT(DISTINCT order_id), 0)
        AS DECIMAL(10,2)
    ) AS Late_Delivery_Percentage
FROM DeliveryData
WHERE Delivery_Performance IN ('Late', 'Early')
GROUP BY Product_Category
ORDER BY Late_Delivery_Percentage DESC;
```

### QUERY OUTPUT SCREENSHOT :-

| | Product_Category | Total_Orders | Late_Orders | Late_Delivery_Percentage |
|---|---|---|---|---|
| 1 | home_comfort_2 | 24 | 4 | 16.67 |
| 2 | furniture_mattress_and_upholstery | 37 | 5 | 13.51 |
| 3 | audio | 348 | 45 | 12.93 |
| 4 | fashion_underwear_beach | 117 | 15 | 12.82 |
| 5 | books_technical | 256 | 28 | 10.94 |
| 6 | home_confort | 392 | 41 | 10.46 |
| 7 | food | 441 | 44 | 9.98 |
| 8 | electronics | 2517 | 247 | 9.81 |
| 9 | christmas_supplies | 125 | 12 | 9.60 |
| 10 | baby | 2809 | 258 | 9.18 |
| 11 | office_furniture | 1254 | 115 | 9.17 |

### BUSINESS INSIGHTS:-

*THERE ARE 74 ROWS OF PRODUCT CATEGORY LIKE GIVEN IN ABOVE SCREENSHOT.*



# SECTION 5 – SELLER & CUSTOMER SATISFACTION ANALYSIS

16] Which sellers have the highest late-delivery percentage? Consider sellers with at least 50 orders.

## SQL QUERY SCREENSHOT :-

```sql
WITH SellerDelivery AS
(
    SELECT
        oi.seller_id,
        o.order_id,
        CASE
            WHEN o.order_delivered_customer_date >
                 o.order_estimated_delivery_date
                THEN 'Late'
            WHEN o.order_delivered_customer_date <
                 o.order_estimated_delivery_date
                THEN 'Early'
        END AS Delivery_Performance
    FROM olist_orders_dataset o
    INNER JOIN olist_order_items_dataset oi
        ON o.order_id = oi.order_id
    WHERE o.order_status = 'delivered'
      AND o.order_delivered_customer_date IS NOT NULL
      AND o.order_estimated_delivery_date IS NOT NULL
)
SELECT
    seller_id,
    COUNT(DISTINCT order_id) AS Total_Orders,
    COUNT(DISTINCT CASE
        WHEN Delivery_Performance = 'Late'
        THEN order_id END) AS Late_Orders,
    CAST(
        100.0 * COUNT(DISTINCT CASE
            WHEN Delivery_Performance = 'Late'
            THEN order_id END)
        / NULLIF(COUNT(DISTINCT order_id), 0)
        AS DECIMAL(10,2)
    ) AS Late_Delivery_Percentage
FROM SellerDelivery
WHERE Delivery_Performance IN ('Late', 'Early')
GROUP BY seller_id
HAVING COUNT(DISTINCT order_id) >= 50
ORDER BY Late_Delivery_Percentage DESC;
```

## QUERY OUTPUT SCREENSHOT :-

| | seller_id | Total_Orders | Late_Orders | Late_Delivery_Percentage |
|---|---|---|---|---|
| 1 | 54965bbe3e4f07ae045b90b0b8541f52 | 73 | 22 | 30.14 |
| 2 | a49928bcdf77c55c6d6e05e09a9b4ca5 | 96 | 25 | 26.04 |
| 3 | beadbee30901a7f61d031b6b686095ad | 64 | 16 | 25.00 |
| 4 | 06a2c3af7b3aee5d69171b0e14f0ee87 | 389 | 90 | 23.14 |
| 5 | cac4c8e7b1ca6252d8f20b2fc1a2e4af | 74 | 17 | 22.97 |
| 6 | 1ca7077d890b907f89be8c954a02686a | 108 | 24 | 22.22 |
| 7 | 6039e27294dc75811c0d8a39069f52c0 | 63 | 14 | 22.22 |
| 8 | 712e6ed8aa4aa1fa65dab41fed5737e4 | 77 | 17 | 22.08 |
| 9 | ea566164622c6b439516ab18062c42cd | 50 | 11 | 22.00 |
| 10 | d13e50eaa47b4cbe9eb81465865d8cfc | 66 | 14 | 21.21 |
| 11 | 2a261b5b644fa05f4f2700eb93544f2c | 51 | 10 | 19.61 |
| 12 | 88460e8ebdecbfecb5f9601833981930 | 246 | 48 | 19.51 |
| 13 | e5a3438891c0bfdb9394643f95273d8e | 216 | 40 | 18.52 |
| 14 | cd68562d3f44870c08922d380acae552 | 122 | 22 | 18.03 |
| 15 | b17b679f4f5ce2e03ce6968c62648246 | 50 | 9 | 18.00 |
| 16 | 002100f778ceb8431b7a1020ff7ab48f | 50 | 9 | 18.00 |

## BUSINESS INSIGHTS:-

*THERE ARE 425 ROWS FOR DISTINCT SELLER ID LIKE GIVEN IN ABOVE SCREENSHOT.*



# SECTION 5 – SELLER & CUSTOMER SATISFACTION ANALYSIS

## 17] What is the average customer review score?

### SQL QUERY SCREENSHOT :-

```
SELECT
    AVG(CAST(review_score AS DECIMAL(10,2))) AS Average_Review_Score
FROM olist_order_reviews_dataset;
```

### QUERY OUTPUT SCREENSHOT :-

| | Average_Review_Score |
|---|---|
| 1 | 4.086420 |

### BUSINESS INSIGHTS:-

*THE AVERAGE REVIEW SCORE IS AROUND 4.*



# SECTION 5 – SELLER & CUSTOMER SATISFACTION ANALYSIS


## 18] How does the average customer review score differ between early and late deliveries?

SQL QUERY SCREENSHOT :-

```sql
WITH DeliveryData AS
(
    SELECT
        order_id,
        CASE
            WHEN order_delivered_customer_date >
                 order_estimated_delivery_date
                THEN 'Late'
            WHEN order_delivered_customer_date <
                 order_estimated_delivery_date
                THEN 'Early'
        END AS Delivery_Performance
    FROM olist_orders_dataset
    WHERE order_status = 'delivered'
      AND order_delivered_customer_date IS NOT NULL
      AND order_estimated_delivery_date IS NOT NULL
)
SELECT
    d.Delivery_Performance,
    COUNT(r.review_id) AS Total_Reviews,
    AVG(CAST(r.review_score AS DECIMAL(10,2)))
        AS Average_Review_Score
FROM DeliveryData d
INNER JOIN olist_order_reviews_dataset r
    ON d.order_id = r.order_id
WHERE d.Delivery_Performance IN ('Early', 'Late')
GROUP BY d.Delivery_Performance
ORDER BY Average_Review_Score DESC;
```

QUERY OUTPUT SCREENSHOT :-

| | Delivery_Performance | Total_Reviews | Average_Review_Score |
|---|---|---|---|
| 1 | Early | 88653 | 4.293718 |
| 2 | Late | 7700 | 2.566493 |

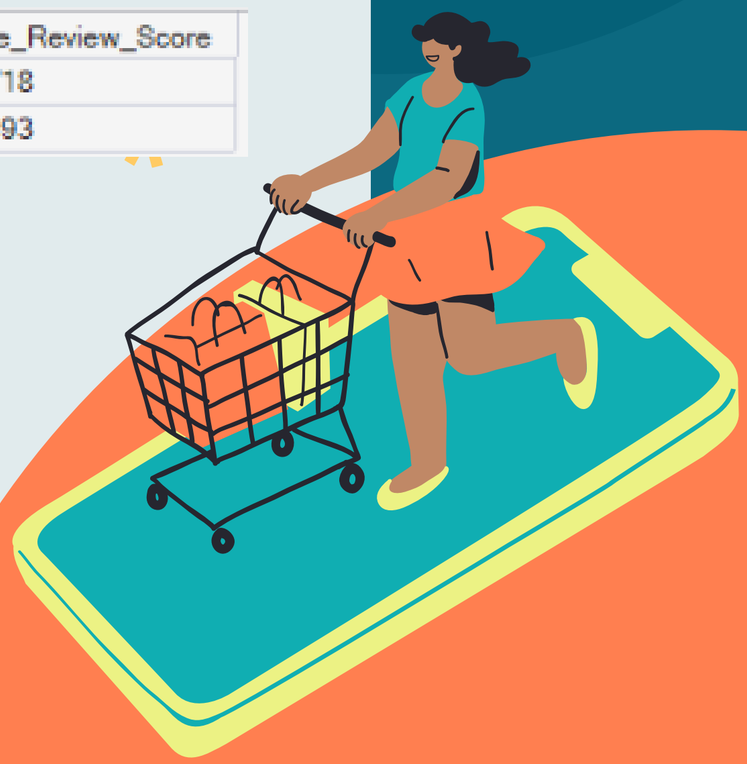

# THANK YOU

