

Deliverect Integration Guide

1. What This Integration Does

The Newo AI Agent integrates with Deliverect so your AI can act as a restaurant ordering assistant on top of a Deliverect-connected menu and channel link.

Once connected, the AI agent can:

- answer menu questions from the synchronized Deliverect menu snapshot
- create new pickup, delivery, eat-in, or curbside orders
- enforce menu grounding by using only synced Deliverect items, PLUs, prices, and availability flags
- store orders created through the agent so the same caller can later ask about them
- request cancellation of an existing order when the order is still eligible
- publish Deliverect ordering, status, and cancellation scenarios into the Newo Canvas

In plain terms: Deliverect remains the restaurant menu and order system. Newo becomes the conversational front desk that can take orders, check status, and request cancellations without asking the customer to open a web ordering link.

The screenshot shows the Newo Builder interface. At the top, there are tabs for 'Customer', 'Projects', and 'Personas'. A search bar labeled 'Search by idn, title, group' is on the right, along with a 'Show Hidden' toggle. A sidebar on the left lists various modules, with 'Module - DeliverectIntegration' highlighted in a red box. The main content area is titled 'Module - DeliverectIntegration' and contains two configuration blocks. The first block, '01. Client ID', has a subtitle 'Deliverect OAuth client ID for the current staging or production environment.' and a text input field containing 'some client id'. The second block, '02. Client Secret', has a subtitle 'Deliverect OAuth client secret. Keep this value private.' and a text input field containing 'some client secret'. Both blocks have a 'Save' button at the bottom right.

Figure S01. The Module - DeliverectIntegration settings block in Newo Builder.

2. Before You Start

Make sure you have:

- an active Deliverect partner/channel setup for the restaurant location
- Deliverect **Client ID** and **Client Secret**
- Deliverect **Channel Name**
- Deliverect **Channel Link ID** for the restaurant location this agent will serve
- Deliverect **Account ID** for the customer account that owns the location
- a published menu for that Deliverect store/channel
- access to the Newo project builder and permission to click **Publish All**

Production also requires Deliverect channel certification for the capabilities you plan to use, such as order creation, status lookup, and cancellation.

Deliverect credentials are partner-gated. They are issued by Deliverect during channel onboarding; there is no public self-service setup where a restaurant operator can generate every credential alone.

Deliverect values you need

Value	What it is used for
Client ID	OAuth machine-to-machine token request.
Client Secret	OAuth machine-to-machine token request.
Channel Name	Channel API order URL path, usually <code>newoai</code> .
Channel ID / Channel Link ID	The restaurant/channel location where orders are submitted.
Account ID	Commerce API menu retrieval.
Location ID	Optional store ID for menu retrieval. Leave blank unless Deliverect gave a separate value.

Where to find these values in Deliverect

Most Deliverect identifiers come from the partner/channel setup, not from the restaurant-facing menu editor.

Value	Where to get it
Client ID and Client Secret	Deliverect channel onboarding email or partner developer credentials page. These belong to your channel app, not to an individual restaurant.
Channel Name	Deliverect channel onboarding details. Use the exact channel value assigned by Deliverect; it is case-sensitive. For the standard Newo channel this is usually <code>newoai</code> .
Account ID	In Deliverect, open the correct customer account and go to the account/admin details page. Copy the Account ID shown there. Figure S02 shows where this value appears.
Channel ID / Channel Link ID	In the same customer account, open the restaurant location/store and its channel link details. Copy the Channel Link ID for the exact restaurant location this agent should submit orders to. Figure S03 shows where this value appears.
Location ID	In the same location/store details page, copy the Location ID if Deliverect shows one. Leave this blank in Newo unless Deliverect provides a separate store/location ID for menu pulls. Figure S03 shows where this value appears.

If you are unsure which ID is which, ask Deliverect for the values for: **client credentials**, **channel name**, **channelLinkId**, **accountId**, and optional **store/location ID** for the same restaurant location.

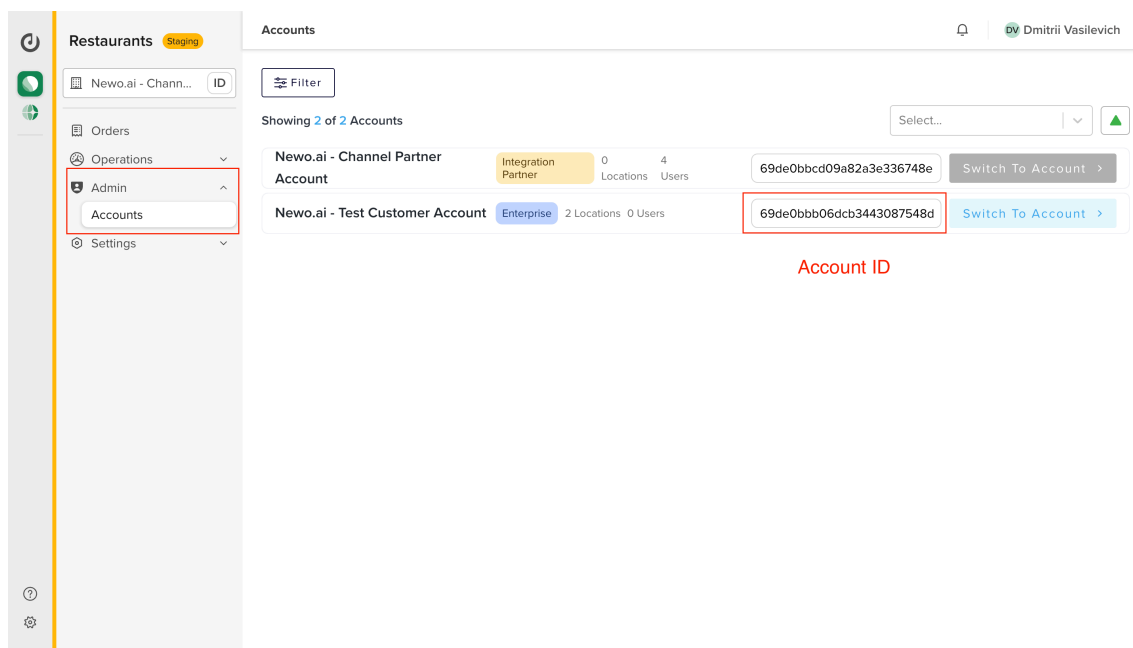


Figure S02. Deliverect account details: copy **Account ID** from this page.

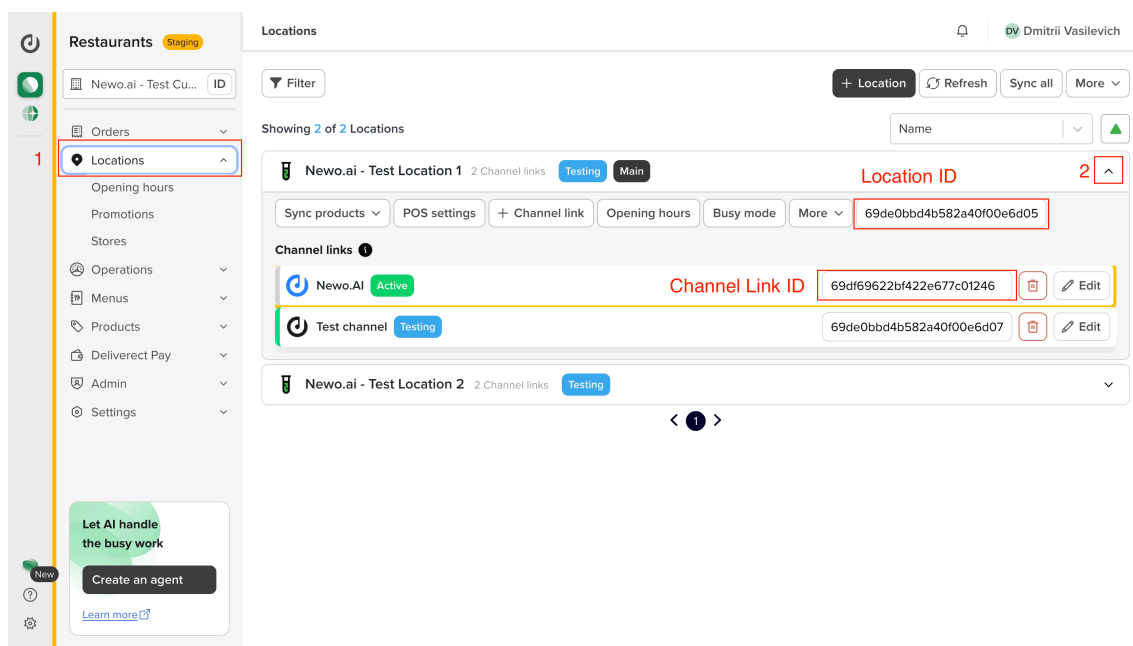


Figure S03. Deliverect location/channel details: copy **Channel Link ID** for the connected channel and **Location ID** if Deliverect provides a separate location value.

Wrong Channel Link ID = wrong restaurant. Channel Link IDs are location-specific. Double-check this before sending any test order.

3. Connecting for the First Time

3.1 Open the Newo Project

1. Open **Newo Portal**.
2. Open the projects list.
3. Select your project.

captainivliev@gmail.com

Member | Member ID: WKKGWRIv

My Customer Organizations

My Partner Organizations

Search

Start typing

Metrics Period: Last 24 hours

Export Session Report

Columns

Filters

Organization Idn	Organization Name	Stage	Created At	Actions
C_NE_MM1U5KW1	Shake Shack at Harry Reid Airport	DEVELOPMENT	2026-05-04 11:42	Customer Portal
C_NE_VPQBNXZV	companionmaids.com	LEAD	2026-04-20 13:49	Customer Portal
C_NE_D69JUJIR	Westlake Austin Aesthetic MedSpa	DEVELOPMENT	2026-04-14 15:31	Customer Portal
C_NE_TGPOUE8Q	Miami Hair & Color Studio	DEVELOPMENT	2026-04-10 20:35	Customer Portal
C_GO_FD6ZMV1B	USA Plumbing Service	OPPORTUNITY	2026-03-12 18:07	Customer Portal
C_NE_ISOWZIOI	https://www - Test	LEAD	2026-03-11 10:35	Customer Portal
C_NE_593Q6LUD	Georges Barber Shop	DEVELOPMENT	2026-03-04 09:43	Customer Portal
C_NE_N09TQCZ	Bayshore Plumbers (Housecallpro test)	PRODUCTION	2026-02-18 22:03	Customer Portal
C_NE_5SOPW9IL	Google Maps	LEAD	2026-02-18 09:33	Customer Portal

<<

<

1

>

>>

Page Size: 25

Figure S04. Opening the Deliverect project in Newo Builder.

3.2 Open Deliverect Settings

1. Inside the project, open **Builder**.
2. Click **Attributes** in the left sidebar.
3. Find **Module - DeliverectIntegration**.
4. Open the group.

01 Client ID deliverect_client_id

Deliverect OAuth client ID for the current staging or production environment.

some client id

Save

02 Client Secret deliverect_client_secret

Deliverect OAuth client secret. Keep this value private.

some client secret

Save

03 API Base URL deliverect_api_base_url

Base URL for Deliverect API requests. Use staging url if configuration is complete.

https://api-staging.deliverect.com

Save

04 Channel Name deliverect_channel_name

Deliverect Channel API scope used in order URL, for example: newo.

newo

Save

05 Channel Link ID deliverect_channel_link_id

Default Deliverect channel link ID for the restaurant location connected to this Newo project.

some channel link id

Save

06 Account ID deliverect_account_id

Deliverect account ID used by the Commerce API menu pull endpoint.

some account id

Save

07 Location ID deliverect_location_id

Deliverect restaurant identifier for the connected restaurant. Newo will pass Channel Link ID as the store id unless this is explicitly supplied to the cache event.

some location id

Save

Figure S05. Newo Builder Deliverect attributes where the copied Deliverect values are pasted.

3.3 Paste OAuth Credentials

Paste and save:

1. **01. Client ID** (`deliverect_client_id`)

2. 02. Client Secret (`deliverect_client_secret`)

Leave **03. API Base URL** on the staging default unless Deliverect has already certified the channel for production.

Module - DeliverectIntegration

The screenshot displays the 'DeliverectIntegration' module configuration interface. It consists of three vertically stacked light blue panels, each with a title, a description, a text input field, and a 'Save' button.

- 01. Client ID** / `deliverect_client_id`: Description: 'Deliverect OAuth client ID for the current staging or production environment.' The input field contains 'some client id'.
- 02. Client Secret** / `deliverect_client_secret`: Description: 'Deliverect OAuth client secret. Keep this value private.' The input field contains 'some client secret'.
- 03. API Base URL** / `deliverect_api_base_url`: Description: 'Base URL for Deliverect API requests. Use staging until certification is complete.'

Figure S06. Client ID and Client Secret fields in Newo.

3.4 Paste Channel and Account Values

Paste and save:

1. **04. Channel Name** (`deliverect_channel_name`), usually `newoai`
2. **05. Channel Link ID** (`deliverect_channel_link_id`)
3. **06. Account ID** (`deliverect_account_id`)
4. **07. Location ID** (`deliverect_location_id`), optional

If **Location ID** is blank, the integration uses **Channel Link ID** as the store ID for menu retrieval.

The image shows four stacked configuration panels for Deliverect integration. Each panel has a title, a description, a text input field, and a 'Save' button.

- 04. Channel Name** / `deliverect_channel_name`
Deliverect Channel API scope used in order URLs, for example `newoai`.
Input: `newoai`
- 05. Channel Link ID** / `deliverect_channel_link_id`
Default Deliverect channelLinkId for the restaurant location connected to this Newo project.
Input: `some channel link id`
- 06. Account ID** / `deliverect_account_id`
Deliverect accountId used by the Commerce API menu pull endpoint.
Input: `some account id`
- 07. Location ID** / `deliverect_location_id`
Deliverect location/store identifier for the connected restaurant. Menu pull uses Channel Link ID as the store id unless this is explicitly supplied to the cache event.
Input: `some location id`

Figure S07. Channel Name, Channel Link ID, Account ID, and optional Location ID.

3.5 Review Feature Switches

For a normal deployment, leave these enabled:

- **Enable Order Creation** (`deliverect_enable_ordering`)
- **Enable Order Cancellation** (`deliverect_enable_cancellation`)
- **Publish Default Canvas** (`deliverect_setup_scenarios`)

Turn a feature off only if the restaurant or Deliverect certification scope does not allow it yet.

The image shows four stacked feature switch configuration panels. Each panel has a title, a description, a dropdown menu, and a 'Save' button.

- Enable Order Cancellation** / `deliverect_enable_cancellation`
Controls whether the custom Deliverect cancel-order tool is registered and allowed to cancel orders.
Dropdown: `True`
- Enable Order Creation** / `deliverect_enable_ordering`
Controls whether the custom Deliverect create-order tool is registered and allowed to submit orders.
Dropdown: `True`
- Enable Order Status Lookup** / `deliverect_enable_order_status`
Controls whether the custom Deliverect order-status tool is registered.
Dropdown: `True`
- Publish Default Canvas** / `deliverect_setup_scenarios`
Controls whether Deliverect default canvas scenarios and library content should be published.
Dropdown: `True`

Figure S08. Deliverect feature switches.

3.6 Save and Publish

Important: save each edited attribute. After editing a setting in Newo, click **Save** for that setting before moving on.

When all fields are saved:

1. Click **Publish All**.
2. Wait for setup to finish.
3. Confirm the menu cache and Canvas items are created.

The screenshot shows the 'Module - DeliverectIntegration' settings page. On the left is a sidebar with a list of modules: 1. Business, 2. Agent, 3. Knowledge Base, 4. Agent Behavior, 5. Reports, 6. Support, 10. Integration Settings, 12. Syrve CRM Settings, Module - DeliverectIntegration (highlighted), Module - Lead Nurturing, Module - Outbound, and Unassigned. The main content area has three sections, each with a 'Save' button highlighted by a red box and a red number '1':
01. Client ID (deliverect_client_id): Deliverect OAuth client ID for the current staging or production environment. Input field contains 'new client id'.
02. Client Secret (deliverect_client_secret): Deliverect OAuth client secret. Keep this value private. Input field contains 'new client secret'.
03. API Base URL (deliverect_api_base_url): Base URL for Deliverect API requests. Use staging until certification is complete. Input field contains 'https://api.staging.deliverect.com'.
In the top right corner, a 'Publish All' button is highlighted with a red box and a red number '2'. There is also a 'Profile' dropdown menu.

Figure S09. Publish All after saving Deliverect settings.

What happens after Publish All:

- Newo creates the HTTP connector `deliverect_connector`.
- Newo creates a hidden setup persona used for background setup actions.
- The integration registers custom Deliverect tools.
- The integration disables generic availability, booking, and cancellation tools that do not apply to restaurant ordering.
- The integration requests a Deliverect OAuth token when needed and caches it.
- The integration pulls the Deliverect menu from the Commerce API.
- The menu is written into prompt-facing restaurant menu/RAG attributes.
- If **Publish Default Canvas** is on, Deliverect intents and scenarios are added to the Canvas.

3.7 Verify Setup

After publishing, check:

- The Deliverect settings group has saved credentials and channel IDs.
- `deliverect_access_token_expires_at` is set to a future timestamp after the first API call.
- The synchronized menu appears in `project_attributes_restaurant_menu` or the RAG menu attribute.
- The Canvas contains Deliverect ordering and cancellation scenarios.

- A test chat asking "What's on the menu?" returns real items from the Deliverect menu.

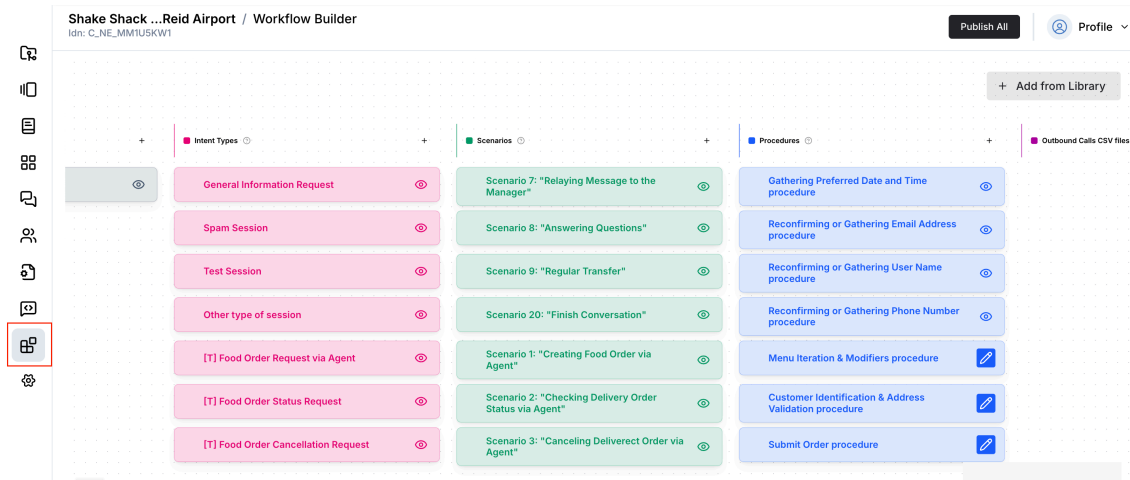


Figure S10. Deliverect Canvas scenarios and intent types after publish.

4. Settings Reference

You can find all settings in **Builder -> Settings -> Module - DeliverectIntegration**.

4.1 Connection Settings

Setting	What it does	Required
01. Client ID (deliverect_client_id)	OAuth client ID from Deliverect onboarding.	Yes
02. Client Secret (deliverect_client_secret)	OAuth client secret paired with Client ID.	Yes
03. API Base URL (deliverect_api_base_url)	Deliverect API root. Default: https://api.staging.deliverect.com.	Yes
Token Audience (deliverect_token_audience)	OAuth audience. Default matches staging API.	Advanced
Token Grant Type (deliverect_token_grant_type)	OAuth grant type. Default: token.	Advanced
Access Token (deliverect_access_token)	Auto-managed cached bearer token. Do not edit manually.	Auto
Access Token Expires At (deliverect_access_token_expires_at)	Auto-managed token expiry timestamp.	Auto

Save

Figure S11. Deliverect connection and token settings.

4.2 Restaurant / Channel Settings

Setting	What it does	Required
04. Channel Name (deliverect_channel_name)	Channel scope used in order URLs. Usually newoai.	Yes
05. Channel Link ID (deliverect_channel_link_id)	Location-specific channel link where orders are submitted.	Yes
06. Account ID (deliverect_account_id)	Account used for Commerce API menu retrieval.	Yes
07. Location ID (deliverect_location_id)	Optional store ID for menu retrieval. Blank means use Channel Link ID.	No

Save

Figure S12. Channel Link ID and Account ID fields.

4.3 Feature On/Off Switches

Setting	Default	What it controls
Enable Order Creation (deliverect_enable_ordering)	On	Whether the agent can submit new Deliverect orders.
Enable Order Cancellation (deliverect_enable_cancellation)	On	Whether the agent can submit cancellation requests.
Publish Default Canvas (deliverect_setup_scenarios)	On	Whether default Deliverect Canvas content is installed.

4.4 Menu / Prompt Settings

Setting	Default	What it controls
RAG Menu Max Lines (deliverect_rag_max_lines)	205	Maximum synced menu lines written into prompt-facing menu knowledge.
project_attributes_restaurant_menu	Auto	Prompt-facing restaurant menu snapshot.
project_attributes_rag_knowledge_base_append_text	Auto	RAG menu text used by ConvoAgent.
deliverect_menu_state	Auto	Structured menu cache with products, modifiers, bundles, and PLU index.

4.5 Save and Publish

Whenever you change credentials, channel IDs, feature switches, or production/staging URL:

1. Save the changed setting.
2. Click **Publish All**.
3. Run at least one menu or ordering test.

5. What the AI Agent Can Do

5.1 Answer Menu Questions

The agent answers menu questions from the synchronized Deliverect menu snapshot. The menu is pulled from:

```
GET /commerce/{accountId}/stores/{storeId}/menus
```

The integration stores:

- item names
- PLUs
- prices in minor currency units
- descriptions

- categories
- required and optional modifier groups
- availability flags such as hidden or snoozed

You will see in Deliverect: no order is created when the customer only asks menu questions.

5.2 Place an Order

The agent can submit a new order through:

```
POST /{channelName}/order/{channelLinkId}
```

What happens automatically:

- The agent extracts customer name, phone, fulfillment type, delivery address when needed, requested time, and confirmed items.
- The integration maps item names to synced menu PLUs and prices.
- The integration blocks submission if the customer selected an item that is missing, snoozed, or not in the current menu.
- The integration blocks delivery orders if the delivery address is missing.
- The integration generates a `channelOrderId` and `channelOrderDisplayId` .
- The integration submits the order with payment metadata where the order is not already paid.
- On success, the order is stored in the persona `deliverect_orders` attribute.

You will see in Deliverect: a new channel order for the configured Channel Link ID.

Showing 1 of 1 Order

Created ↓ ×	Location	Order ID	Channel	Delivery Systems	Receipt ID	Status
May 12, 2026 19:09 🕒 May 12, 2026 19:24	Newo.ai - Test Location 1 🔗	TESTORDER5		—		Received by POS ⬆

🔗 Order ID TESTORDER5 — newo-test-order5

📄 Copy URLmore ▾

DisplayStatusChannel orderIntegration info

📄 ORDER DETAILSnewo-test-order5

Item	Item price	Total
1 Chicken Burger P-BURG-CHK	\$8.00	\$8.00
Sub total		\$8.00
Total		\$8.00
Payment amount		\$8.00
Payment method		card
Order is already paid		No

🕒 PICKUP TIME

May 12, 2026 19:24

🕒 ORDER TIME

May 12, 2026 19:09

💬 ORDER NOTE

No note available for this order

🔗 CHANNEL ORDER ID

newo-test-order5

Figure S13. New order in Deliverect after the agent submits it.

5.3 Request Cancellation

The agent can request cancellation by sending a cancellation status payload to:

```
POST /{channelName}/order/{channelLinkId}
```

The payload includes:

- `channelOrderId`
- `channelOrderDisplayId`
- `status: 100`
- cancellation reason

The flow will not send an automatic cancellation request if the locally known Deliverect status is already `20` or higher, because the order has advanced far enough that a human or restaurant-side process should handle it.

You will see in Deliverect: a cancellation request. Final cancellation depends on restaurant/POS acceptance.

5.4 What the Agent Cannot Do

The current integration does not:

- edit menus in Deliverect
- create or manage appointments
- check calendar availability
- process payments inside Newo
- support multiple Channel Link IDs in one Newo project
- guarantee cancellation after a restaurant or POS has accepted the order

6. How to Test That Everything Works

Before going live, run through this checklist on staging or a quiet test location.

6.1 After Setup

After clicking **Publish All**, confirm:

- ☐ **Client ID** and **Client Secret** are filled in.
- ☐ **API Base URL** matches the credential environment.
- ☐ **Channel Name**, **Channel Link ID**, and **Account ID** are filled in.
- ☐ **Enable Order Creation** and **Enable Order Cancellation** match your certification scope.
- ☐ The Canvas contains Deliverect order, status, and cancellation scenarios.
- ☐ The menu cache contains real Deliverect items.

6.2 Test Menu Knowledge

1. Start a test chat or call session.
2. Ask: "What's on the menu?"
3. Confirm the agent lists real Deliverect items.
4. Ask about an item that is not in the menu.
5. Confirm the agent does not invent it and offers available alternatives.

6.3 Test Order Placement

1. Ask: "Can I place an order for pickup?"
2. Choose one real menu item.

3. Include any required modifiers.
4. Provide first name, last name if your scenario asks for it, and phone number.
5. Confirm the summary.
6. Confirm the agent says the order-submission trigger phrase.
7. Confirm a new order appears in Deliverect under the configured Channel Link ID.

6.4 Test Delivery Order Guard

1. Ask for delivery.
2. Do not provide an address at first.
3. Confirm the agent asks for the missing delivery address before submitting.
4. Provide the address and complete the order.

6.5 Test Cancellation

1. Use a fresh test order in a cancellable state.
2. Ask to cancel the order.
3. Confirm the agent restates the target order and asks for confirmation.
4. Confirm the agent says the cancellation trigger phrase.
5. Confirm Deliverect receives the cancellation request.

7. Canvas Auto-Setup

When **Publish Default Canvas** is on, the integration publishes Deliverect ordering content into the Canvas.

7.1 What Gets Added

Intent	Scenario
[T] Food Order Request via Agent	Scenario 1: "Creating Food Order via Agent"
[T] Food Order Status Request	Scenario 2: "Checking Delivery Order Status via Agent"
[T] Food Order Cancellation Request	Scenario 3: "Canceling Deliverect Order via Agent"

These are starting templates. Review them and adapt the wording to the restaurant, but keep the trigger phrases intact.

7.2 Trigger Phrases

Each scenario contains a phrase the agent must say before the matching custom tool fires.

Trigger phrase	Fires
"I will submit your order to the restaurant right now. Please give me a moment, and I'll get back to you shortly."	Order creation
"Thanks. I'll continue with your order now."	Order continuation after missing data
"I will ask the restaurant to cancel that order right now. Please give me a moment."	Cancellation request

Do not reword, translate, or remove trigger phrases. If a trigger phrase changes, the corresponding action may stop firing.

7.3 Safe Canvas Customization

Safe changes:

- Reword the greeting, item questions, and summary.
- Add upsell prompts before the final order summary.
- Add restaurant-specific disclaimers about cancellation windows.
- Change how the agent explains status results.

Unsafe changes:

- Removing the menu-grounding rule.
- Letting the agent submit orders before final customer confirmation.
- Rewording trigger phrases.
- Saying cancellation is guaranteed before Deliverect confirms the result.

8. Reconnecting, Rotating Credentials, and Production Cutover

8.1 When to Reconnect

Reconnect or republish when:

- Deliverect rotates the Client Secret.
- You switch from staging to production.
- The Channel Link ID changes.
- Menu questions return an empty or outdated menu.
- Order submission starts failing with authentication errors.

8.2 Rotate Client Secret

1. Get the new Client Secret from Deliverect.
2. Paste it into **02. Client Secret**.
3. Save the setting.
4. Click **Publish All**.
5. Run a menu test and a small order test.

8.3 Switch to Production

After Deliverect certification:

1. Replace staging Client ID and Client Secret with production values.
2. Set **03. API Base URL** to the production URL Deliverect provided, usually `https://api.deliverect.com`.
3. Set **Token Audience** to the matching production audience if Deliverect requires it.
4. Save each changed setting.
5. Click **Publish All**.
6. Run order placement, status, and cancellation tests.

9. Troubleshooting

The agent cannot answer menu questions

Likely cause: the menu cache is empty or the Account ID / store ID is wrong.

Fix:

1. Confirm **Account ID** belongs to the same Deliverect account as the Channel Link ID.
 2. Confirm the restaurant has a published menu.
 3. Confirm **Location ID** is blank unless Deliverect gave a separate store ID.
 4. Click **Publish All** to pull the menu again.
-

Publish All or the first API call fails with authentication

Likely cause: Client ID, Client Secret, Token Audience, or API Base URL do not match.

Fix:

1. Check for leading/trailing spaces in Client ID and Client Secret.
 2. Confirm staging credentials use `https://api.staging.deliverect.com`.
 3. Confirm production credentials use the production API base URL.
 4. Save and publish again.
-

Orders appear in the wrong restaurant

Likely cause: Channel Link ID points to a different restaurant location.

Fix:

1. Copy the correct Channel Link ID from Deliverect.
 2. Paste it into **05. Channel Link ID**.
 3. Save and publish.
 4. Place a small test order and verify the location in Deliverect.
-

The agent says an item cannot be submitted

Likely cause: the item is missing from `deliverect_menu_state`, has no matching PLU, or is snoozed/unavailable.

Fix:

1. Confirm the item is available in Deliverect.
 2. Republish to refresh the menu snapshot.
 3. Ask the customer to choose from the synced menu names.
-

Cancellation is not sent automatically

Likely cause: cancellation is disabled, the order target is unclear, another cancellation is already in progress, or the latest known status is already `20` or higher.

Fix:

1. Confirm **Enable Order Cancellation** is on.
 2. Confirm the exact order with the customer.
 3. If the order has advanced, hand off to the restaurant or a human team member.
-

The agent ignores ordering/cancellation language

Likely cause: Canvas scenario trigger phrases were edited or the default Canvas was not published.

Fix:

1. Confirm **Publish Default Canvas** is on.
2. Confirm the Deliverect intents and scenarios exist.
3. Restore the trigger phrases from Section 7.2.
4. Click **Publish All**.

10. FAQ

Does this create real orders in Deliverect?

Yes. Order creation submits a real channel order to the configured Channel Link ID.

Does the agent use a live menu on every turn?

No. The integration pulls a menu snapshot and injects it into prompt/RAG attributes. Republish or refresh setup to pull a newer menu.

Can one Newo project serve multiple restaurants?

No. One project is configured for one Channel Link ID. Use separate projects for separate restaurant locations.

Can the agent take payment?

No. The integration sends order data to Deliverect. Payment remains handled by Deliverect, the POS, or the restaurant's normal process.

Can the agent cancel any order?

No. It sends cancellation requests only when the order is clearly identified and still eligible. Final cancellation depends on Deliverect/POS/restaurant acceptance.

What order types are supported?

The extraction supports pickup, delivery, eat-in, and curbside. Pickup is the safest default unless the customer clearly asks for another fulfillment type.

Why does the agent refuse an item the customer asked for?

The agent must use the synchronized menu. If an item is missing, snoozed, or has no matching PLU, the integration blocks submission and asks the customer to choose an available item.

Do I need webhook URLs for the basic flow?

No. The standard setup uses API calls for menu pull, order creation, status lookup, and cancellation request. Webhook-driven operational state can be handled separately with Deliverect onboarding if needed.

11. Support Handoff Notes

When handing off to support or an implementation partner, include:

- Deliverect environment: staging or production
- API Base URL
- Channel Name
- Channel Link ID
- Account ID
- optional Location ID
- which features are enabled
- whether default Canvas setup was used
- whether the latest menu cache contains the expected items

Key implementation details:

- OAuth token request: `POST /oauth/token`

- Menu pull: GET /commerce/{accountId}/stores/{storeId}/menus
- Order creation: POST /{channelName}/order/{channelLinkId}
- Cancellation request: POST /{channelName}/order/{channelLinkId} with status: 100
- Stored user orders: persona attribute deliverect_orders
- Prompt menu text: project_attributes_restaurant_menu and project_attributes_rag_knowledge_base_append_text
- Structured menu cache: deliverect_menu_state

The two most common fixes are:

1. Re-save credentials/channel IDs and click **Publish All**.
2. Verify the Channel Link ID and Account ID belong to the same Deliverect location/account.