

# Deliverect Integration Guide

## What the AI can do

The Newo AI Agent integrates with Deliverect so your AI can act as a restaurant ordering assistant on top of a Deliverect-connected menu and channel link.

Once connected, the AI agent can:

- answer menu questions from the synchronized Deliverect menu snapshot
- create new pickup, delivery, eat-in, or curbside orders
- enforce menu grounding by using only synced Deliverect items, PLUs, prices, and availability flags
- store orders created through the agent so the same caller can later ask about them
- receive Deliverect order status webhook updates and use the latest saved status when the caller asks about an order
- request cancellation of an existing order when the order is still eligible
- publish Deliverect ordering, status, and cancellation scenarios into the Newo Canvas

**In plain terms:** Deliverect remains the restaurant menu and order system. Newo becomes the conversational front desk that can take orders, check status, and request cancellations without asking the customer to open a web ordering link.

The screenshot shows the Newo Builder interface. On the left is a sidebar with a list of modules: 1. Business, 2. Agent, 3. Knowledge Base, 4. Agent Behavior, 5. Reports, 6. Support, 10. Integration Settings, 12. Syrve CRM Settings, and three sub-modules: Module - DeliverectIntegration (highlighted with a red box), Module - Lead Nurturing, and Module - Outbound. The main content area is titled 'Module - DeliverectIntegration'. It contains two configuration blocks. The first block, '01. Client ID', has a subtitle 'deliverect\_client\_id' and a description 'Deliverect OAuth client ID for the current staging or production environment.' It features a text input field with the placeholder 'some client id' and a 'Save' button. The second block, '02. Client Secret', has a subtitle 'deliverect\_client\_secret' and a description 'Deliverect OAuth client secret. Keep this value private.' It also features a text input field with the placeholder 'some client secret' and a 'Save' button. At the top of the main area, there is a search bar with the placeholder 'Search by idn, title, group' and a 'Show Hidden' toggle.

Figure S01. The Module - DeliverectIntegration settings block in Newo Builder.

## Before You Start

Make sure you have:

- an active Deliverect partner/channel setup for the restaurant location
- Deliverect **Client ID** and **Client Secret**
- Deliverect **Channel Name**
- Deliverect **Channel Link ID** for the restaurant location this agent will serve
- Deliverect **Account ID** for the customer account that owns the location
- a published menu for that Deliverect store/channel
- access to configure the Deliverect order-status webhook field for the channel link
- access to the Newo project builder and permission to click **Publish All**

Production also requires Deliverect channel certification for the capabilities you plan to use, such as order creation, status lookup, and cancellation.

*Deliverect credentials are partner-gated. They are issued by Deliverect during channel onboarding; there is no public self-service setup where a restaurant operator can generate every credential alone.*

### Deliverect values you need

| Value                               | What it is used for                                                                        |
|-------------------------------------|--------------------------------------------------------------------------------------------|
| <b>Client ID</b>                    | OAuth machine-to-machine token request.                                                    |
| <b>Client Secret</b>                | OAuth machine-to-machine token request.                                                    |
| <b>Channel Name</b>                 | Channel API order URL path, usually <code>newoai</code> .                                  |
| <b>Channel ID / Channel Link ID</b> | The restaurant/channel location where orders are submitted.                                |
| <b>Account ID</b>                   | Commerce API menu retrieval.                                                               |
| <b>Location ID</b>                  | Optional store ID for menu retrieval. Leave blank unless Deliverect gave a separate value. |

### Where to find these values in Deliverect

Most Deliverect identifiers come from the partner/channel setup, not from the restaurant-facing menu editor.

| Value                                     | Where to get it                                                                                                                                                                                                                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Client ID</b> and <b>Client Secret</b> | Deliverect channel onboarding email or partner developer credentials page. These belong to your channel app, not to an individual restaurant.                                                                                                   |
| <b>Channel Name</b>                       | Deliverect channel onboarding details. Use the exact channel value assigned by Deliverect; it is case-sensitive. For the standard Newo channel this is usually <code>newoai</code> .                                                            |
| <b>Account ID</b>                         | In Deliverect, open the correct customer account and go to the account/admin details page. Copy the <b>Account ID</b> shown there. Figure S02 shows where this value appears.                                                                   |
| <b>Channel ID / Channel Link ID</b>       | In the same customer account, open the restaurant location/store and its channel link details. Copy the <b>Channel Link ID</b> for the exact restaurant location this agent should submit orders to. Figure S03 shows where this value appears. |
| <b>Location ID</b>                        | In the same location/store details page, copy the <b>Location ID</b> if Deliverect shows one. Leave this blank in Newo unless Deliverect provides a separate store/location ID for menu pulls. Figure S03 shows where this value appears.       |

If you are unsure which ID is which, ask Deliverect for the values for: **client credentials**, **channel name**, **channelLinkId**, **accountId**, and optional **store/location ID** for the same restaurant location.

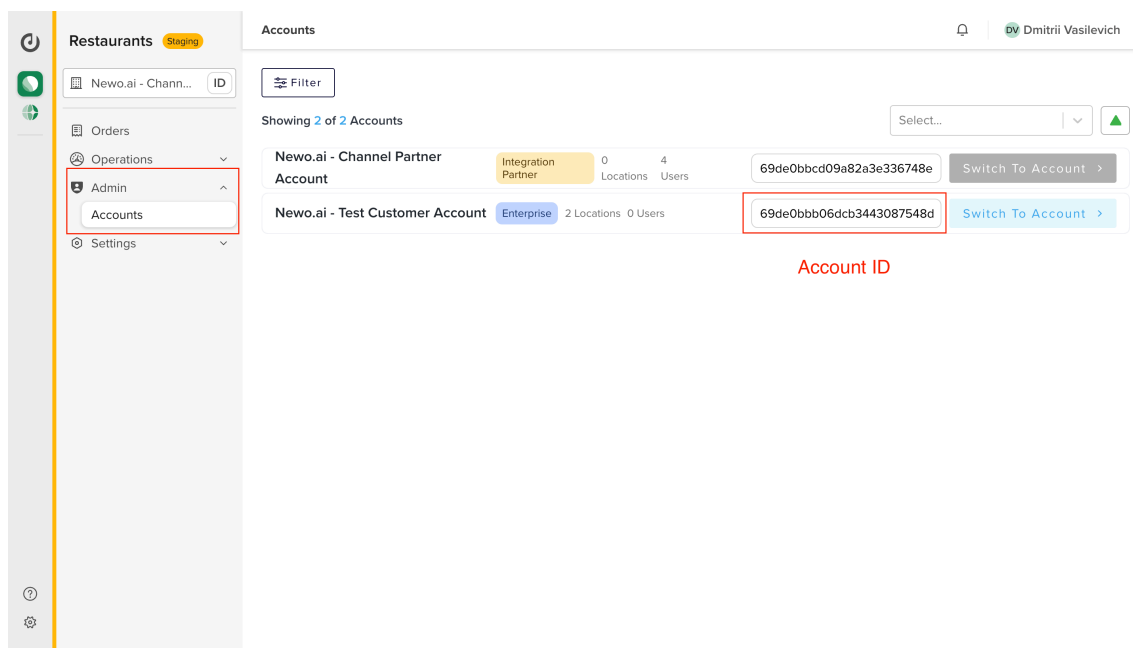


Figure S02. Deliverect account details: copy **Account ID** from this page.

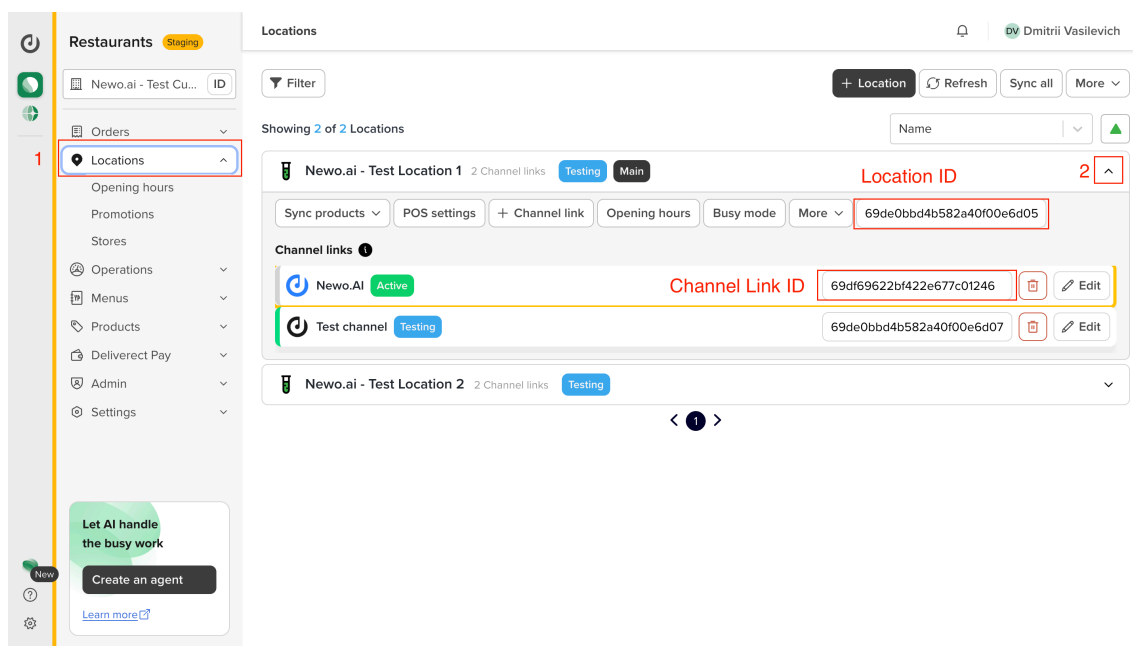


Figure S03. Deliverect location/channel details: copy **Channel Link ID** for the connected channel and **Location ID** if Deliverect provides a separate location value.


**Wrong Channel Link ID = wrong restaurant.** Channel Link IDs are location-specific. Double-check this before sending any test order.

## Setup


### Create the Newo project

If this project already exists in **Newo Builder**, skip this subsection and continue with the integration-specific settings below.

1. In **Newo Builder**, open the projects list and click **Create Project** (or **Create New Project** from the top-right menu).



2. Fill **IDN** and **Title**. The exact names do not matter; use any clear names your team will recognize.
3. In **Registry**, choose the release channel:
  - **staging** — the newest module fixes appear here first. Use it when you need the latest fix, but expect possible unfinished changes.
  - **production** — the final stable version for live projects.
4. In **Module**, select the module for this integration.



### 3.1 Open the Newo Project

1. Open **Newo Portal**.
2. Open the projects list.
3. Select your project.

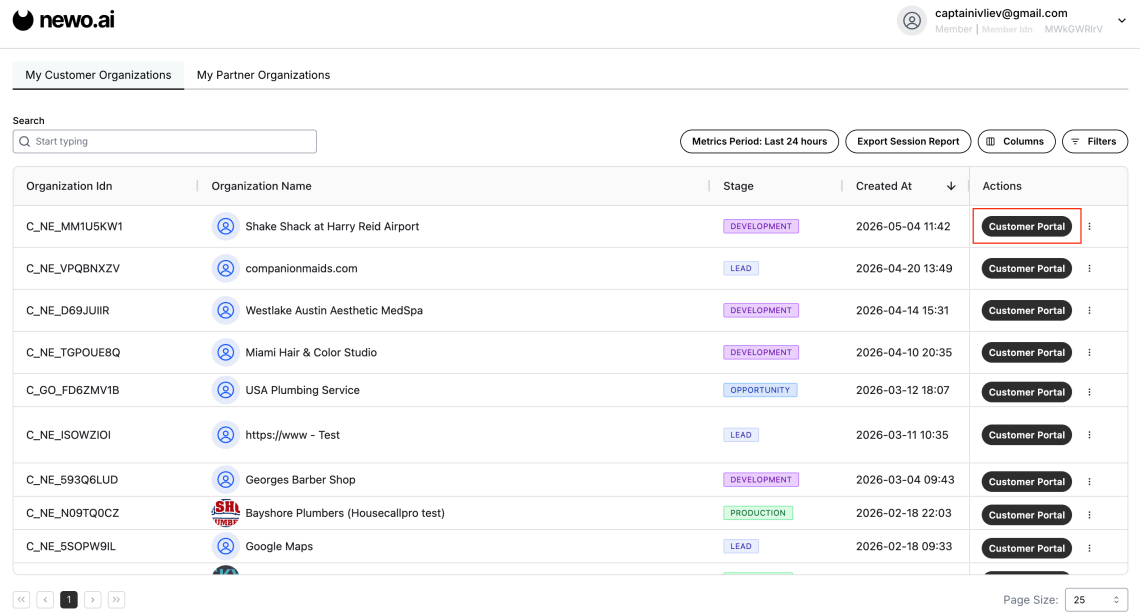


Figure S04. Opening the Deliverect project in Newo Builder.

### 3.2 Open Deliverect Settings

1. Inside the project, open **Builder**.

2. Click **Attributes** in the left sidebar.
3. Find **Module - DeliverectIntegration**.
4. Open the group.

The screenshot shows a form with two columns. The left column has four fields: 01. Client ID (deliverect\_client\_id), 02. Client Secret (deliverect\_client\_secret), 03. API Base URL (deliverect\_api\_base\_url), and 04. Channel Name (deliverect\_channel\_name). The right column has three fields: 05. Channel Link ID (deliverect\_channel\_link\_id), 06. Account ID (deliverect\_account\_id), and 07. Location ID (deliverect\_location\_id). Each field has a 'Save' button next to it.

Figure S05. Newo Builder Deliverect attributes where the copied Deliverect values are pasted.

### 3.3 Paste OAuth Credentials

Paste and save:

1. **01. Client ID** ( deliverect\_client\_id )
2. **02. Client Secret** ( deliverect\_client\_secret )

Leave **03. API Base URL** on the staging default unless Deliverect has already certified the channel for production.

#### Module - DeliverectIntegration

The screenshot shows the first three fields of the form: 01. Client ID (deliverect\_client\_id), 02. Client Secret (deliverect\_client\_secret), and 03. API Base URL (deliverect\_api\_base\_url). Each field has a 'Save' button next to it.

Figure S06. Client ID and Client Secret fields in Newo.

### 3.4 Paste Channel and Account Values

Paste and save:

1. **04. Channel Name** ( `deliverect_channel_name` ), usually `newoai`
2. **05. Channel Link ID** ( `deliverect_channel_link_id` )
3. **06. Account ID** ( `deliverect_account_id` )
4. **07. Location ID** ( `deliverect_location_id` ), optional

If **Location ID** is blank, the integration uses **Channel Link ID** as the store ID for menu retrieval.

The screenshot displays a configuration interface for Deliverect integration, consisting of four stacked panels, each with a title bar, a description, a text input field, and a 'Save' button.

- 04. Channel Name** / `deliverect_channel_name`: Description: "Deliverect Channel API scope used in order URLs, for example newoai .". Input: "newoai".
- 05. Channel Link ID** / `deliverect_channel_link_id`: Description: "Default Deliverect channelLinkId for the restaurant location connected to this Newo project.". Input: "some channel link id".
- 06. Account ID** / `deliverect_account_id`: Description: "Deliverect accountId used by the Commerce API menu pull endpoint.". Input: "some account id".
- 07. Location ID** / `deliverect_location_id`: Description: "Deliverect location/store identifier for the connected restaurant. Menu pull uses Channel Link ID as the store id unless this is explicitly supplied to the cache event.". Input: "some location id".

Figure S07. Channel Name, Channel Link ID, Account ID, and optional Location ID.

### 3.5 Review Feature Switches

For a normal deployment, leave these enabled:

- **Enable Order Creation** ( `deliverect_enable_ordering` )
- **Enable Order Status Lookup** ( `deliverect_enable_order_status` )
- **Enable Order Cancellation** ( `deliverect_enable_cancellation` )
- **Publish Default Canvas** ( `deliverect_setup_scenarios` )

Turn a feature off only if the restaurant or Deliverect certification scope does not allow it yet.

The image shows a configuration interface for Deliverect feature switches. It consists of four vertically stacked panels, each with a title, a description, a toggle switch, and a 'Save' button.

- Enable Order Cancellation** / [deliverect\\_enable\\_cancellation](#)  
Controls whether the custom Deliverect cancel-order tool is registered and allowed to cancel orders.  
Toggle: True  
Save
- Enable Order Creation** / [deliverect\\_enable\\_ordering](#)  
Controls whether the custom Deliverect create-order tool is registered and allowed to submit orders.  
Toggle: True  
Save
- Enable Order Status Lookup** / [deliverect\\_enable\\_order\\_status](#)  
Controls whether the custom Deliverect order-status tool is registered.  
Toggle: True  
Save
- Publish Default Canvas** / [deliverect\\_setup\\_scenarios](#)  
Controls whether Deliverect default canvas scenarios and library content should be published.  
Toggle: True  
Save

Figure S08. Deliverect feature switches.

### 3.6 Configure Deliverect Webhooks

Newo creates incoming webhook URLs during setup. Copy those URLs from the Deliverect settings block in Newo, then paste them into the matching fields on the Deliverect location.

In Deliverect:

1. Open the **Locations** tab.
2. Select the location connected to this Newo project.
3. Click **Edit**.
4. Turn on the **Show more** switch in the top right.
5. Scroll to the correct section and paste the matching Newo webhook URL.
6. Save the location.

#### 3.6.1 Menu Update Webhook

Menu refresh can use Deliverect menu update webhook events. Copy **Menu Update Webhook URL** from the Newo Deliverect settings block.

In Deliverect, paste it into **Menu update webhook URL** under the **Menu** section of the selected location, then click **Save**.

When Deliverect calls this webhook, Newo treats it as a menu-change notification and starts its existing menu cache refresh. Newo then pulls the latest menu from Deliverect Commerce API and rewrites the saved menu cache/prompt menu.

You can also refresh the Newo menu manually: click **Publish All**, and the integration will pull the latest published menus from Deliverect.

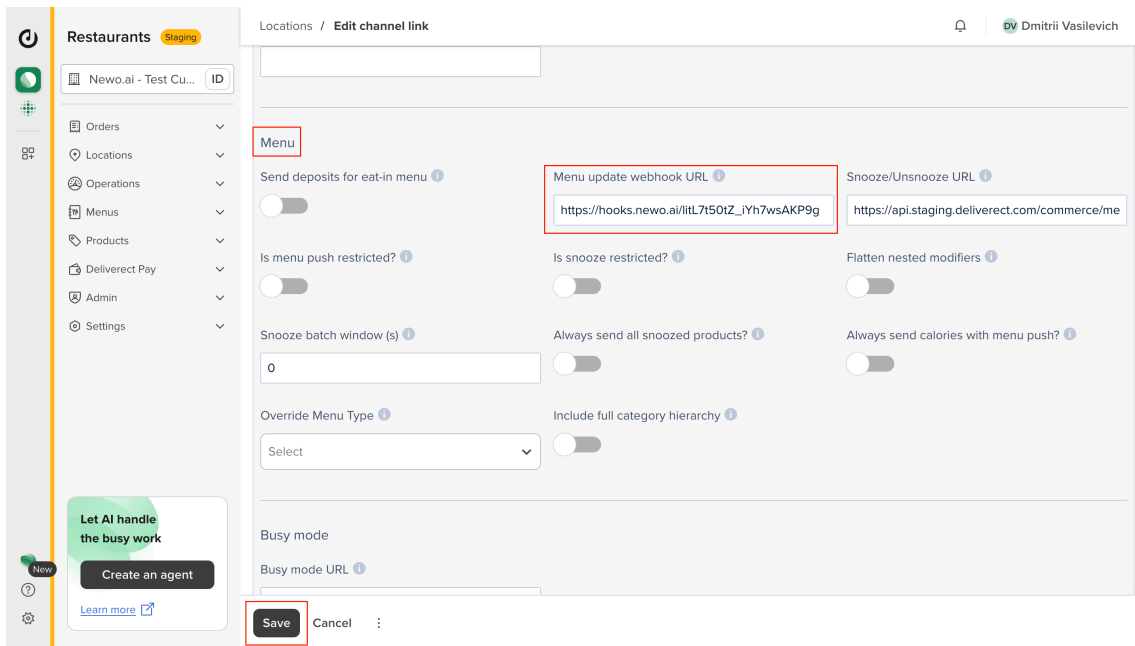


Figure S09. Deliverect location editor: paste the Newo **Menu Update Webhook URL** into the **Menu update webhook URL** field under the **Menu** section.

### 3.6.2 Order Status Webhook

Order status lookup uses Deliverect order status webhook updates. Copy **Order Status Webhook URL** from the Newo Deliverect settings block.

In Deliverect, paste it into **Order status webhook URL** under the **Order** section of the selected location, then click **Save**.

Use the exact Newo-generated URL. It is the endpoint Deliverect calls when an order is accepted, denied, ready, in delivery, finalized, failed, or otherwise updated.



Restaurants Staging

Locations / **Edit channel link**

Auto-finalize orders after 1 hours

**Order**

Send status for rejected orders ☐ Fixed cost %  Use store item names ☐

Order status webhook URL **https://hooks.newo.ai/WwPsW2mmoEsySUZOU:** Auto accept order when 4, Accepted in POS Update prep time URL

CourierUpdate webhook URL  Send Order To Quest ☐ Send table info to the notes? ☒

Update prep time using the original pickup time ☐

Order payment

**Save** Cancel

Let AI handle the busy work

Create an agent

Learn more

Figure S10. Deliverect location editor: paste the Newo **Order Status Webhook URL** into the **Order status webhook URL** field under the **Order** section.

### 3.7 Save and Publish

**Important: save each edited attribute.** After editing a setting in Newo, click **Save** for that setting before moving on.

When all fields are saved:

1. Click **Publish All**.
2. Wait for setup to finish.
3. Confirm the menu cache and Canvas items are created.

Shake Shack ...Reid Airport / Attributes

2 **Publish All** Profile

Customer Projects Personas

Search by idn, title, group

Show Hidden

**Module - DeliverectIntegration**

**01. Client ID** deliverect\_client\_id

Deliverect OAuth client ID for the current staging or production environment.

new client id

**1** **Save**

**02. Client Secret** deliverect\_client\_secret

Deliverect OAuth client secret. Keep this value private.

new client secret

**1** **Save**

**03. API Base URL** deliverect\_api\_base\_url

Base URL for Deliverect API requests. Use staging until certification is complete.

https://api.staging.deliverect.com

Save

1. Business

2. Agent

3. Knowledge Base

4. Agent Behavior

5. Reports

6. Support

10. Integration Settings

12. Syrve CRM Settings

Module - DeliverectIntegration

Module - Lead Nurturing

Module - Outbound

Unassigned

Figure S11. Publish All after saving Deliverect settings.

### What happens after Publish All:

- Newo creates the connection `deliverect_connector`.
- Newo creates a hidden setup persona used for background setup actions.
- The integration registers custom Deliverect tools.
- The integration disables generic availability, booking, and cancellation tools that do not apply to restaurant ordering.
- The integration creates incoming webhook endpoints for menu updates and order status updates.
- The integration requests a Deliverect OAuth token when needed and caches it.
- The integration pulls the Deliverect menu from the Commerce API.
- The menu is written into prompt-facing restaurant menu/RAG attributes.
- If **Publish Default Canvas** is on, Deliverect intents and scenarios are added to the Canvas.

## 3.8 Verify Setup

After publishing, check:

- The Deliverect settings group has saved credentials and channel IDs.
- `deliverect_access_token_expires_at` is set to a future timestamp after the first API call.
- The synchronized menu appears in `project_attributes_restaurant_menu` or the RAG menu attribute.
- The Canvas contains Deliverect ordering and cancellation scenarios.
- **Menu Update Webhook URL** is copied into the Deliverect **Menu update webhook URL** field and saved.
- **Order Status Webhook URL** is filled in and copied into the matching Deliverect order-status webhook field.
- A test chat asking "What's on the menu?" returns real items from the Deliverect menu.

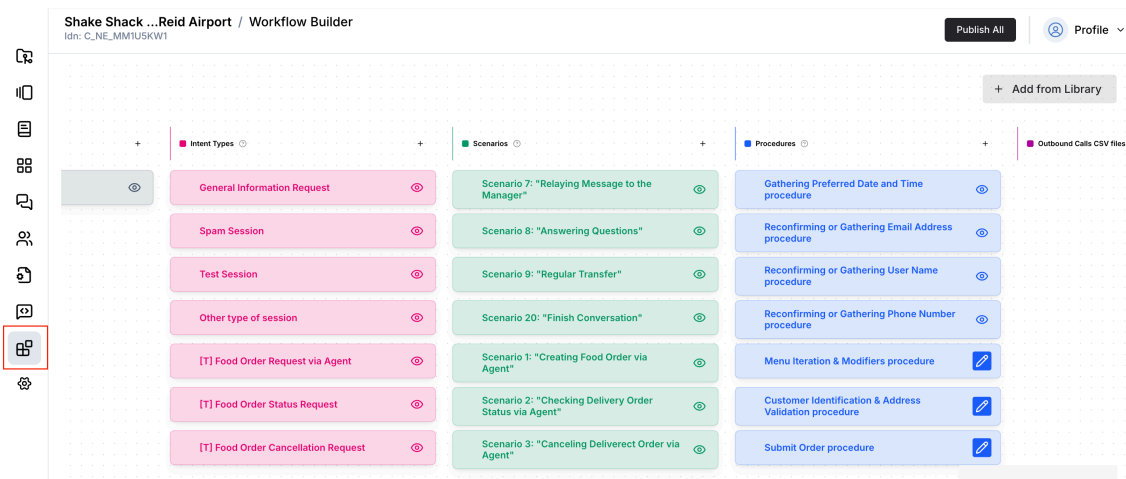


Figure S12. Deliverect Canvas scenarios and intent types after publish.

## All settings reference

You can find all settings in **Builder -> Settings -> Module - DeliverectIntegration**.

### 4.1 Connection Settings



|                                                                           |                                                                                                          |                       |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----------------------|
| <b>06. Account ID</b> (deliverect_account_id)                             | Account used for Commerce API menu retrieval.                                                            | Yes                   |
| <b>07. Location ID</b> (deliverect_location_id)                           | Optional store ID for menu retrieval. Blank means use Channel Link ID.                                   | No                    |
| <b>08. Menu Update Webhook URL</b> (deliverect_menu_update_webhook_url)   | Auto-created Newo URL for Deliverect menu update webhooks.                                               | Optional              |
| <b>09. Order Status Webhook URL</b> (deliverect_order_status_webhook_url) | Auto-created Newo URL to paste into Deliverect's order-status webhook field. Required for status lookup. | Yes for status lookup |

05. Channel Link ID / [deliverect\\_channel\\_link\\_id](#)

Default Deliverect channelId for the restaurant location connected to this Newo project.

69df69622bf422e677c0124612412

Save

06. Account ID / [deliverect\\_account\\_id](#)

Deliverect accountId used by the Commerce API menu pull endpoint.

69de0bbb06dcb3443087548d12412

Save

Figure S14. Channel Link ID and Account ID fields.

4.3 Feature On/Off Switches

| Setting                                                               | Default | What it controls                                                               |
|-----------------------------------------------------------------------|---------|--------------------------------------------------------------------------------|
| <b>Enable Order Creation</b><br>(deliverect_enable_ordering)          | On      | Whether the agent can submit new Deliverect orders.                            |
| <b>Enable Order Status Lookup</b><br>(deliverect_enable_order_status) | On      | Whether the agent can answer status questions from saved order status updates. |
| <b>Enable Order Cancellation</b><br>(deliverect_enable_cancellation)  | On      | Whether the agent can submit cancellation requests.                            |
| <b>Publish Default Canvas</b><br>(deliverect_setup_scenarios)         | On      | Whether default Deliverect Canvas content is installed.                        |

4.4 Menu / Prompt Settings

| Setting | Default | What it controls |
|---------|---------|------------------|
|---------|---------|------------------|

|                                                      |      |                                                                         |
|------------------------------------------------------|------|-------------------------------------------------------------------------|
| <b>RAG Menu Max Lines</b> (deliverect_rag_max_lines) | 205  | Maximum synced menu lines written into prompt-facing menu knowledge.    |
| project_attributes_restaurant_menu                   | Auto | Prompt-facing restaurant menu snapshot.                                 |
| project_attributes_rag_knowledge_base_append_text    | Auto | RAG menu text used by ConvoAgent.                                       |
| deliverect_menu_state                                | Auto | Structured menu cache with products, modifiers, bundles, and PLU index. |

## 4.5 Save and Publish

Whenever you change credentials, channel IDs, feature switches, or production/staging URL:

1. Save the changed setting.
2. Click **Publish All**.
3. Run at least one menu or ordering test.

## What the AI can do

### 5.1 Answer Menu Questions

The agent answers menu questions from the synchronized Deliverect menu snapshot. The menu is pulled from:

```
lookup request
```

The integration stores:

- item names
- PLUs
- prices in minor currency units
- descriptions
- categories
- required and optional modifier groups
- availability flags such as hidden or snoozed

**You will see in Deliverect:** no order is created when the customer only asks menu questions.

### 5.2 Place an Order

The agent can submit a new order through:

```
create/update request
```

What happens automatically:

- The agent extracts customer name, phone, fulfillment type, delivery address when needed, requested time, and confirmed items.
- The integration maps item names to synced menu PLUs and prices.

- The integration blocks submission if the customer selected an item that is missing, snoozed, or not in the current menu.
- The integration blocks delivery orders if the delivery address is missing.
- The integration generates a `channelOrderId` and `channelOrderDisplayId`.
- The integration submits the order with payment metadata where the order is not already paid.
- On success, the order is stored in the persona `deliverect_orders` attribute.

**You will see in Deliverect:** a new channel order for the configured Channel Link ID.

Showing 1 of 1 Order

| Created ↓ ×                                | Location                    | Order ID   | Channel                                                                           | Delivery Systems | Receipt ID | Status          |
|--------------------------------------------|-----------------------------|------------|-----------------------------------------------------------------------------------|------------------|------------|-----------------|
| May 12, 2026 19:09<br>🕒 May 12, 2026 19:24 | Newo.ai - Test Location 1 📍 | TESTORDER5 |  | —                |            | Received by POS |

🔗 Order ID TESTORDER5 — newo-test-order5 📄 Copy URL more ▾

**Display** Status Channel order Integration info

 ORDER DETAILS

newo-test-order5

| Item                        | Item price | Total  |
|-----------------------------|------------|--------|
| 1 Chicken Burger P-BURG-CHK | \$8.00     | \$8.00 |
| Sub total                   |            | \$8.00 |
| Total                       |            | \$8.00 |
| Payment amount              |            | \$8.00 |
| Payment method              |            | card   |
| Order is already paid       |            | No     |

🕒 PICKUP TIME

May 12, 2026 19:24

🕒 ORDER TIME

May 12, 2026 19:09

💬 ORDER NOTE

No note available for this order

🔗 CHANNEL ORDER ID

newo-test-order5

Figure S15. New order in Deliverect after the agent submits it.

### 5.3 Check Order Status

The agent checks order status from saved Newo order state that is updated by Deliverect order status webhooks.

How it works:

- When the agent creates an order, Newo saves the generated order reference for that caller.
- Deliverect later sends order status updates to the Newo **Order Status Webhook URL**.
- Newo matches the webhook update to the saved order and stores the latest status.
- When the same caller asks about the order, the agent reads the latest saved status and explains it.

This means status lookup depends on the webhook being configured in Deliverect. If the customer asks before Deliverect has sent a status update, the agent explains that the order was submitted and the restaurant/POS has not sent a status update yet.

Common status examples include:

- accepted
- denied
- ready for pickup
- en route to the customer

- finalized in the POS
- canceled
- failed

**Important:** status lookup is not a live search by display order number across all Deliverect orders. It works for orders the agent created or has saved for the caller, then keeps those orders updated through Deliverect webhook events.

## 5.4 Request Cancellation

The agent can request cancellation by sending a cancellation status payload to:

```
create/update request
```

The payload includes:

- channelOrderId
- channelOrderDisplayId
- status: 100
- cancellation reason

The flow will not send an automatic cancellation request if the locally known Deliverect status is already 20 or higher, because the order has advanced far enough that a human or restaurant-side process should handle it.

**You will see in Deliverect:** a cancellation request. Final cancellation depends on restaurant/POS acceptance.

## 5.5 What the Agent Cannot Do

The current integration does not:

- edit menus in Deliverect
- create or manage appointments
- check calendar availability
- process payments inside Newo
- look up arbitrary historical Deliverect orders that were not created or saved in the caller's Newo conversation
- support multiple Channel Link IDs in one Newo project
- guarantee cancellation after a restaurant or POS has accepted the order

## How to test that everything works

Before going live, run through this checklist on staging or a quiet test location.

### 6.1 After Setup

After clicking **Publish All**, confirm:

- ☐ **Client ID** and **Client Secret** are filled in.
- ☐ **API Base URL** matches the credential environment.
- ☐ **Channel Name**, **Channel Link ID**, and **Account ID** are filled in.

- ☐ **Enable Order Creation**, **Enable Order Status Lookup**, and **Enable Order Cancellation** match your certification scope.
- ☐ **Menu Update Webhook URL** is copied into the Deliverect **Menu update webhook URL** field and saved.
- ☐ **Order Status Webhook URL** is copied into the Deliverect order-status webhook field.
- ☐ The Canvas contains Deliverect order, status, and cancellation scenarios.
- ☐ The menu cache contains real Deliverect items.

## 6.2 Test Menu Knowledge

1. Start a test chat or call session.
2. Ask: "What's on the menu?"
3. Confirm the agent lists real Deliverect items.
4. Ask about an item that is not in the menu.
5. Confirm the agent does not invent it and offers available alternatives.

## 6.3 Test Order Placement

1. Ask: "Can I place an order for pickup?"
2. Choose one real menu item.
3. Include any required modifiers.
4. Provide first name, last name if your scenario asks for it, and phone number.
5. Confirm the summary.
6. Confirm the agent says the order-submission trigger phrase.
7. Confirm a new order appears in Deliverect under the configured Channel Link ID.
8. Save the customer-facing order reference shown by the agent. You can use it in the status and cancellation tests.

## 6.4 Test Delivery Order Guard

1. Ask for delivery.
2. Do not provide an address at first.
3. Confirm the agent asks for the missing delivery address before submitting.
4. Provide the address and complete the order.

## 6.5 Test Order Status Lookup

Before this test, confirm **Order Status Webhook URL** from Newo is pasted into the Deliverect order-status webhook field.

1. Create a fresh test order through the agent.
2. In Deliverect/POS, move the order into a state that sends an order status webhook, such as accepted or denied.
3. Ask the same test caller: "What is the status of my order?"
4. Confirm the agent says the status-check trigger phrase: "Let me check your order status right now."
5. Confirm the agent answers with the latest saved status, for example accepted, denied, ready for pickup, or canceled.

If the agent says the order is submitted and no status update has arrived yet, the webhook has not reached Newo or could not be matched to the saved order. Check the webhook URL setup in Deliverect and then try another status update.

## 6.6 Test Cancellation

1. Use a fresh test order in a cancellable state.



2. Ask to cancel the order.
3. Confirm the agent restates the target order and asks for confirmation.
4. Confirm the agent says the cancellation trigger phrase.
5. Confirm Deliverect receives the cancellation request.

## 7. Canvas Auto-Setup

When **Publish Default Canvas** is on, the integration publishes Deliverect ordering content into the Canvas.

### 7.1 What Gets Added

| Intent                              | Scenario                                               |
|-------------------------------------|--------------------------------------------------------|
| [T] Food Order Request via Agent    | Scenario 1: "Creating Food Order via Agent"            |
| [T] Food Order Status Request       | Scenario 2: "Checking Delivery Order Status via Agent" |
| [T] Food Order Cancellation Request | Scenario 3: "Canceling Deliverect Order via Agent"     |

These are starting templates. Review them and adapt the wording to the restaurant, but keep the trigger phrases intact.

### 7.2 Trigger Phrases

Each scenario contains a phrase the agent must say before the matching custom tool fires.

| Trigger phrase                                                                                                     | Fires                                 |
|--------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| "I will submit your order to the restaurant right now. Please give me a moment, and I'll get back to you shortly." | Order creation                        |
| "Thanks. I'll continue with your order now."                                                                       | Order continuation after missing data |
| "Let me check your order status right now."                                                                        | Order status lookup                   |
| "I will ask the restaurant to cancel that order right now. Please give me a moment."                               | Cancellation request                  |

*Do not reword, translate, or remove trigger phrases. If a trigger phrase changes, the corresponding action may stop firing.*

### 7.3 Safe Canvas Customization

Safe changes:

- Reword the greeting, item questions, and summary.
- Add upsell prompts before the final order summary.
- Add restaurant-specific disclaimers about cancellation windows.
- Change how the agent explains status results.

Unsafe changes:

- Removing the menu-grounding rule.
- Letting the agent submit orders before final customer confirmation.
- Rewording trigger phrases.

- Saying cancellation is guaranteed before Deliverect confirms the result.

## 8. Reconnecting, Rotating Credentials, and Production Cutover

### 8.1 When to Reconnect

Reconnect or republish when:

- Deliverect rotates the Client Secret.
- You switch from staging to production.
- The Channel Link ID changes.
- Menu questions return an empty or outdated menu.
- Order submission starts failing with authentication errors.

### 8.2 Rotate Client Secret

1. Get the new Client Secret from Deliverect.
2. Paste it into **02. Client Secret**.
3. Save the setting.
4. Click **Publish All**.
5. Run a menu test and a small order test.

### 8.3 Switch to Production

After Deliverect certification:

1. Replace staging Client ID and Client Secret with production values.
2. Set **03. API Base URL** to the production URL Deliverect provided, usually `https://api.deliverect.com`.
3. Set **Token Audience** to the matching production audience if Deliverect requires it.
4. Save each changed setting.
5. Click **Publish All**.
6. Run order placement, status, and cancellation tests.

## Common errors and recovery

### The agent cannot answer menu questions

**Likely cause:** the menu cache is empty or the Account ID / store ID is wrong.

**Fix:**

1. Confirm **Account ID** belongs to the same Deliverect account as the Channel Link ID.
2. Confirm the restaurant has a published menu.
3. Confirm **Location ID** is blank unless Deliverect gave a separate store ID.
4. Click **Publish All** to pull the menu again.

---

### Publish All or the first API call fails with authentication

**Likely cause:** Client ID, Client Secret, Token Audience, or API Base URL do not match.

**Fix:**

1. Check for leading/trailing spaces in Client ID and Client Secret.
2. Confirm staging credentials use `https://api.staging.deliverect.com`.
3. Confirm production credentials use the production API base URL.

4. Save and publish again.
- 

### Orders appear in the wrong restaurant

**Likely cause:** Channel Link ID points to a different restaurant location.

**Fix:**

1. Copy the correct Channel Link ID from Deliverect.
  2. Paste it into **05. Channel Link ID**.
  3. Save and publish.
  4. Place a small test order and verify the location in Deliverect.
- 

### The agent says an item cannot be submitted

**Likely cause:** the item is missing from `deliverect_menu_state` , has no matching PLU, or is snoozed/unavailable.

**Fix:**

1. Confirm the item is available in Deliverect.
  2. Republish to refresh the menu snapshot.
  3. Ask the customer to choose from the synced menu names.
- 

### Cancellation is not sent automatically

**Likely cause:** cancellation is disabled, the order target is unclear, another cancellation is already in progress, or the latest known status is already `20` or higher.

**Fix:**

1. Confirm **Enable Order Cancellation** is on.
  2. Confirm the exact order with the customer.
  3. If the order has advanced, hand off to the restaurant or a human team member.
- 

### Order status always says submitted or no update yet

**Likely cause:** Deliverect has not sent an order status webhook to Newo, or the webhook was sent without the matching order reference.

**Fix:**

1. Copy **Order Status Webhook URL** from Newo.
  2. Paste it into the Deliverect order-status webhook field.
  3. Save the Deliverect channel/link settings.
  4. Create a new test order through the agent.
  5. Move the order to a new status in Deliverect/POS and ask the same caller to check status again.
- 

### The agent ignores ordering/cancellation language

**Likely cause:** Canvas scenario trigger phrases were edited or the default Canvas was not published.

**Fix:**

1. Confirm **Publish Default Canvas** is on.

2. Confirm the Deliverect intents and scenarios exist.
3. Restore the trigger phrases from Section 7.2.
4. Click **Publish All**.

## FAQ

### **Does this create real orders in Deliverect?**

Yes. Order creation submits a real channel order to the configured Channel Link ID.

### **Does the agent use a live menu on every turn?**

No. The integration pulls a menu snapshot and injects it into prompt/RAG attributes. Republish or refresh setup to pull a newer menu.

### **Can one Newo project serve multiple restaurants?**

No. One project is configured for one Channel Link ID. Use separate projects for separate restaurant locations.

### **Can the agent take payment?**

No. The integration sends order data to Deliverect. Payment remains handled by Deliverect, the POS, or the restaurant's normal process.

### **Can the agent cancel any order?**

No. It sends cancellation requests only when the order is clearly identified and still eligible. Final cancellation depends on Deliverect/POS/restaurant acceptance.

### **What order types are supported?**

The extraction supports pickup, delivery, eat-in, and curbside. Pickup is the safest default unless the customer clearly asks for another fulfillment type.

### **Why does the agent refuse an item the customer asked for?**

The agent must use the synchronized menu. If an item is missing, snoozed, or has no matching PLU, the integration blocks submission and asks the customer to choose an available item.

### **Do I need webhook URLs for the basic flow?**

Yes for order status lookup. Menu pull, order creation, and cancellation request use API calls, but order status lookup depends on Deliverect sending status updates to the Newo **Order Status Webhook URL**.

### **Can the agent check status immediately after creating an order?**

It can answer that the order was submitted. More specific statuses, such as accepted or denied, appear after Deliverect sends the order status webhook.

### **Can the agent find an old Deliverect order by display ID?**

Only if that order was created or saved by this Newo agent for the caller. The integration does not search arbitrary historical Deliverect orders by display ID.

## 11. Support Handoff Notes

When handing off to support or an implementation partner, include:

- Deliverect environment: staging or production
- API Base URL
- Channel Name
- Channel Link ID
- Account ID
- optional Location ID

- which features are enabled
- whether default Canvas setup was used
- whether the latest menu cache contains the expected items

Key implementation details:

- OAuth token request: handled during setup
- Menu pull: handled during menu sync
- Order creation: handled when the caller confirms an order
- Cancellation request: handled by updating the order status
- Order status lookup: saved Newo order state updated by Deliverect order status webhook
- Stored user orders: persona attribute `deliverect_orders`
- Prompt menu text: `project_attributes_restaurant_menu` and `project_attributes_rag_knowledge_base_append_text`
- Structured menu cache: `deliverect_menu_state`

The two most common fixes are:

1. Re-save credentials/channel IDs and click **Publish All**.
2. Verify the Channel Link ID and Account ID belong to the same Deliverect location/account.