

Monday.com Integration Guide

1. What This Integration Does

The Newo AI Agent integrates with monday.com so your AI can act as a scheduling assistant on top of your existing monday boards.

Once connected, the AI agent can:

- check appointment availability based on the meetings already on your **Activities** board and offer time slots to callers
- book new appointments and automatically create or link the contact on your **Contacts** board
- cancel appointments by archiving the meeting item on your Activities board
- recognize returning clients by phone number and pull their upcoming bookings into the conversation
- preload availability silently at the start of a session, so the agent answers faster

In plain terms: your monday.com boards become the calendar and client list that your AI assistant works from. Conversations on any channel (voice, chat, SMS, WhatsApp) read from and write to the same boards your team already uses.

The screenshot shows the 'MondayCRM Settings' block in the Newo Builder. On the left is a sidebar with a menu: Customer, Projects, Personas, 1. Business, 2. Agent, 3. Knowledge Base, 4. Agent Behavior, 5. Reports, 6. Support, 10. Integration Settings, 12. MondayCRM Settings (highlighted), Module - Lead Nurturing, and Module - Outbound. The main area is titled '12. MondayCRM Settings' and contains three sections: '12-01. MondayCRM Authentication Method' with an OAuth input field and a 'Save' button; '12-02. MondayCRM API Token' with a 'Value' input field and a 'Save' button; and '12-03. MondayCRM Client ID' with a text description. At the bottom left is a '<> Show Logs' link, and at the bottom right is a circular icon with a speech bubble.

Figure S01. The MondayCRM Settings block in the Newo Builder — entry point for setup.

2. Before You Start

Make sure you have:

- an active **monday.com** account
- **admin access** to that account (you'll need to open the Developer Center)
- access to the Newo project builder for your project
- permission to edit project settings and click **Publish All**

The integration works on top of **two boards** that must already exist on your monday account:

- **Activities board** — where appointments / meetings live
- **Contacts board** — where your clients live

The boards must include a few specific columns so the agent knows where to read and write.

Activities board — required columns

Column ID	What it's for
activity_type	The kind of activity. The agent looks for Meeting .
activity_status	Status of the activity (e.g. Open , Done). The agent treats Done as not blocking.
activity_start_time	Start date and time of the appointment.
activity_end_time	End date and time of the appointment.
activity_item	A link/connection to the related item on the Contacts board.

Optional columns the agent will auto-detect and fill in if they exist:

- a **date column** — populated with the booking date for calendar views
- a **notes / long text column** — populated with booking details

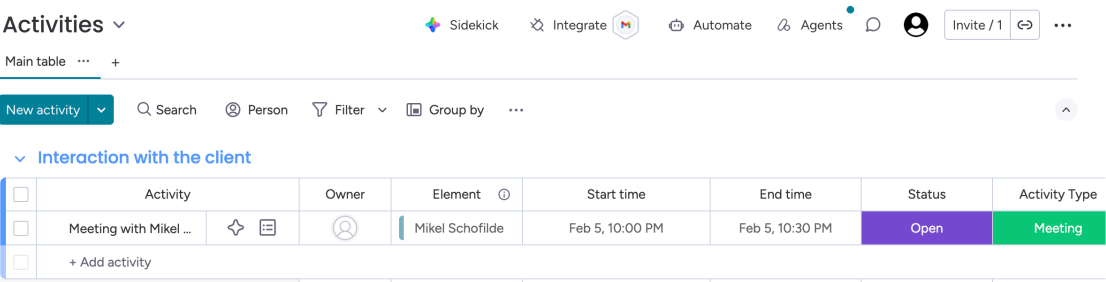


Figure S02. The Activities board — meeting items with type, status, start/end times, and a link to the Contacts board.

Contacts board — required columns

Column ID	What it's for
contact_phone	Phone number of the client. Used to recognize returning callers and to link bookings.
contact_email	Email of the client. Displayed back to the agent as context when available.

Tip: You can also find the board ID from the board menu: ... **menu** → **Board settings** → **Board ID**.

3.2 Connect with API Token (Recommended)

1. In monday.com, click your **profile avatar** in the top-right corner and choose **Developers**.

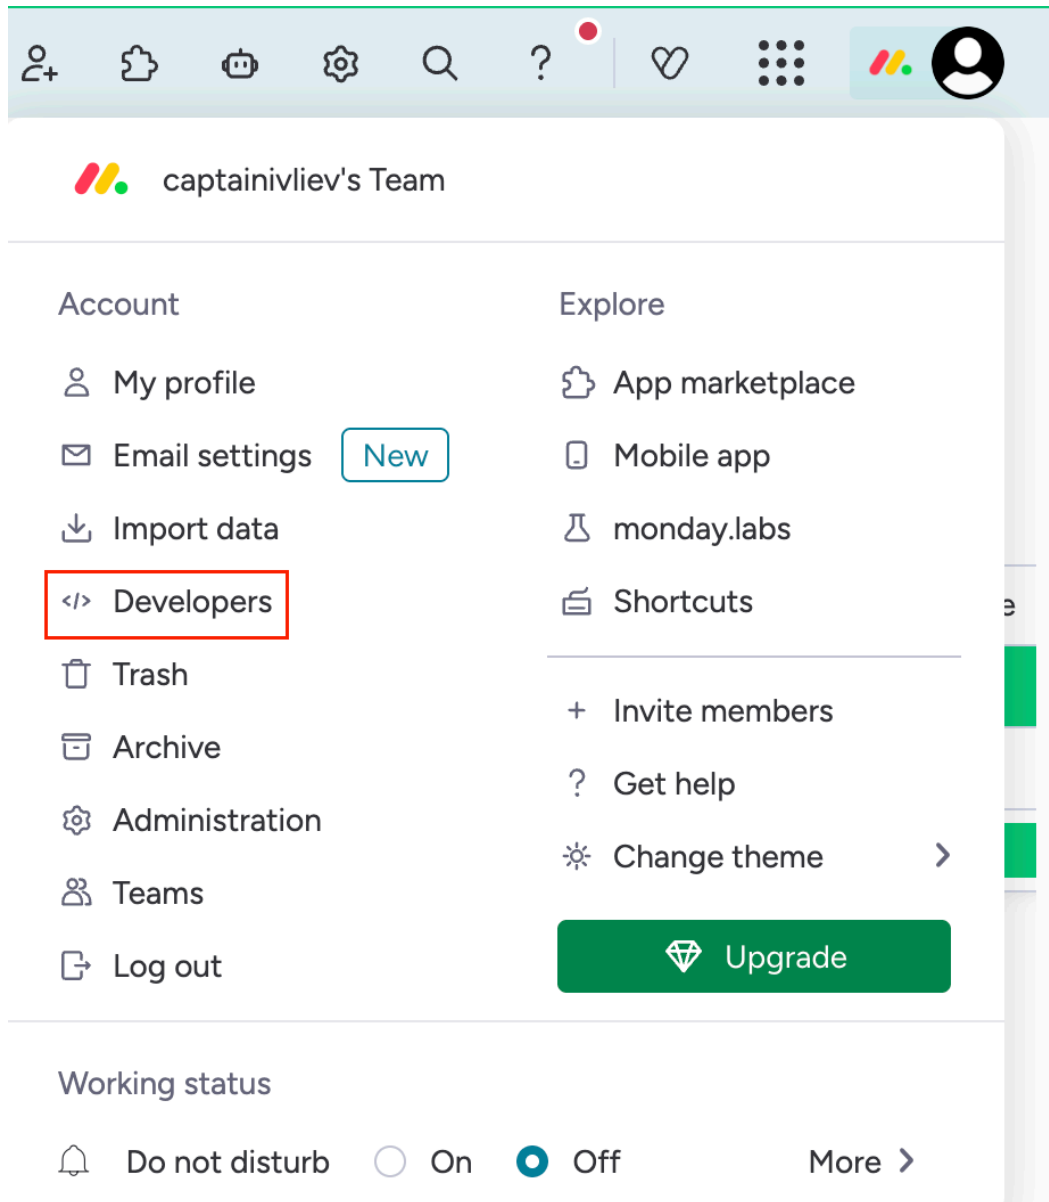


Figure S05. The Developers entry in the monday profile menu — opens the Developer Center.

2. In the Developer Center sidebar, open the **API Token** section.

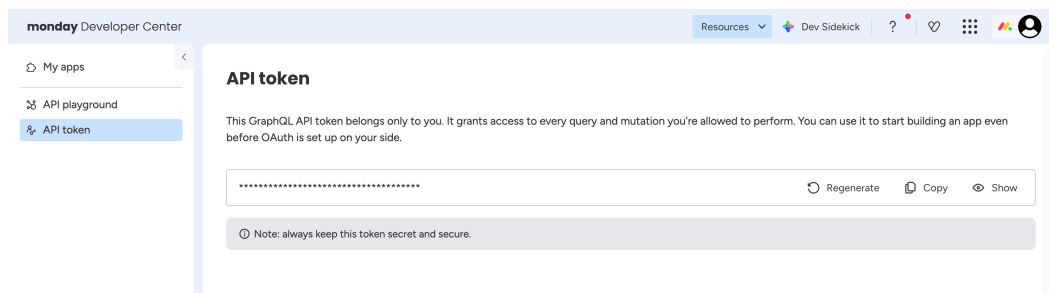


Figure S06. The API Token page in the monday Developer Center.

3. Click **Show** (or the copy icon) next to your personal API token and copy the full value.

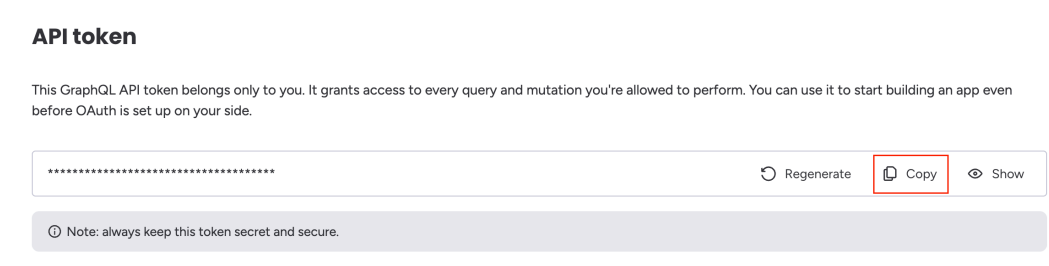


Figure S07. Copy the API token from the Developer Center.

4. Open your project in Newo and go to **Builder → Attributes**.
5. Find the **MondayCRM Settings** section.
6. Set **Authentication Method** (`monday_auth_type`) to `Token` .
7. Paste the token into the **API Token** (`monday_api_token`) field.
8. Fill in **Activities ID** (`activities_id`) and **Contacts ID** (`contacts_id`) from Step 3.1.
9. Click **Save** on every attribute you changed.
10. Click **Publish All**.

Important: This token gives full access to your monday.com account — do not share it publicly. If it ever leaks, regenerate it from the Developer Center; the old token stops working immediately.

3.3 Connect with OAuth

Use this method only if you want the assistant to connect through a monday.com app you own (for example, a published marketplace app).

1. In monday.com, open the Developer Center (profile avatar → **Developers**) and choose **My apps**.

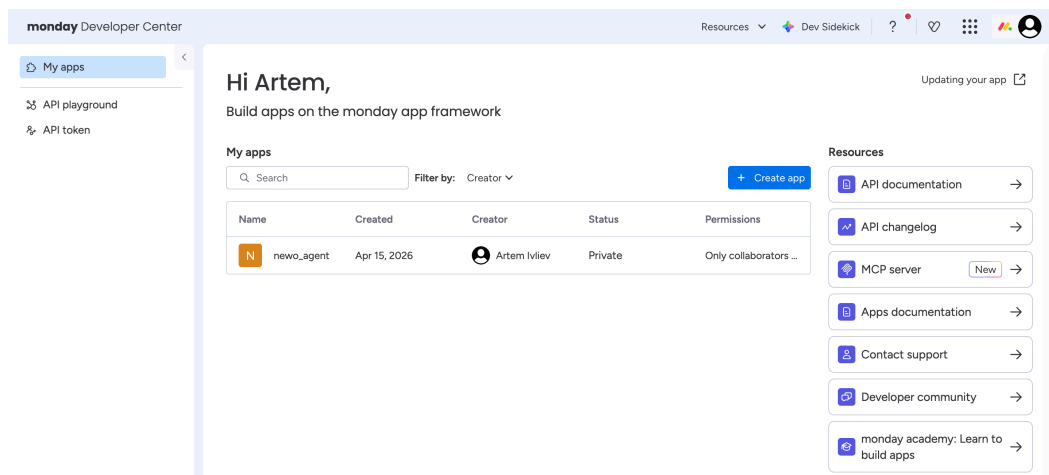


Figure S08. The My apps page in the monday Developer Center.

2. Open an existing app or click **Create app** and give it a name (for example `Newo AI Assistant`).

×

Create new app

Get started by setting up your app's basic information

App name *

App slug *

ⓘ Important: App slug cannot be changed

The app slug is permanent and used in URLs and internal references. Choose a stable, long-term name.

Cancel
Create app

Figure S09. Creating a new monday app to host the OAuth connection.

3. Inside the app, open **Features** and add a new **OAuth & Permissions** feature. Copy the **Client ID** and **Client Secret** from this screen.

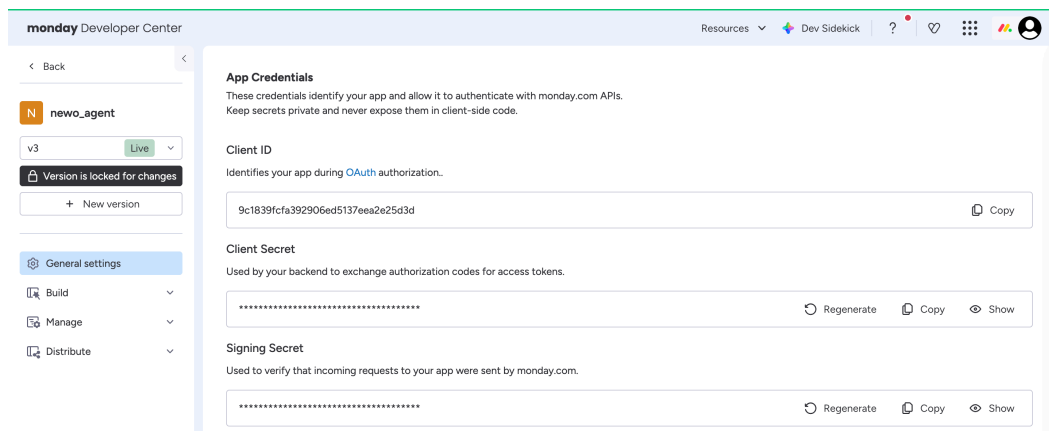


Figure S10. The OAuth & Permissions feature page — Client ID and Client Secret live here.

4. In the **Scopes** section of the same page, enable:

- o boards:read
- o boards:write

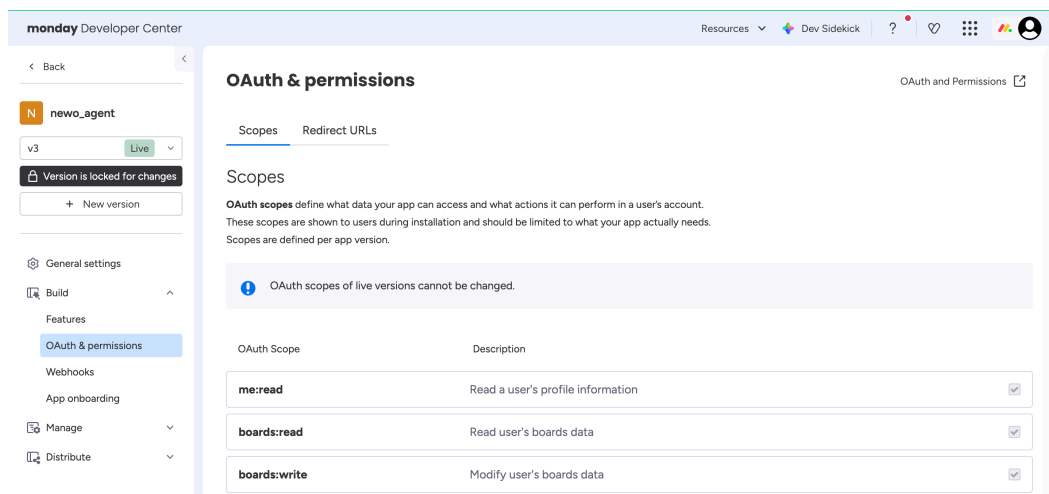


Figure S11. Required OAuth scopes.

5. In the **Redirect URIs** field, enter the redirect URI we provided you (for example `https://twinmind.pro/`) and **Save**. The redirect URI must exactly match the value you'll paste into Newo — including `https://` , slashes, and trailing characters.

4.1 Connection Settings

Setting	What it does	Required
Authentication Method (monday_auth_type)	Choose Token (recommended) or OAuth.	Yes
API Token (monday_api_token)	Personal API token from the monday Developer Center.	Token only
Client ID (monday_client_id)	OAuth Client ID from your monday app.	OAuth only
Client Secret (monday_client_secret)	OAuth Client Secret from your monday app.	OAuth only
OAuth Redirect URI (monday_redirect_uri)	Must exactly match the redirect URI in your monday app.	OAuth only
OAuth Code (monday_oauth_code)	One-time authorization code from the redirect URL.	OAuth only
Access Token (monday_access_token)	Auto-filled by Newo after a successful OAuth exchange. Do not edit by hand.	Auto

12-01. MondayCRM Authentication Method / [monday_auth_type](#)

Choose how the agent will connect to monday.com.
OAuth: use a monday app authorization code during setup. The integration exchanges it for an access token.
Token: paste a monday API token directly. Use this for manual setup or testing.

OAuth

✓ OAuth

Token

Figure S15. The Authentication Method dropdown — choose Token or OAuth.

12-02. MondayCRM API Token / [monday_api_token](#)

Paste a monday.com API token here when Authentication Method is set to Token. You can find it in monday.com developer/API settings.

your api token here

Save

Figure S16. The API Token field — used when Authentication Method is set to Token.

12-03. MondayCRM Client ID / [monday_client_id](#)

This ID is unique to your app and is used for initiating OAuth.

9c1839cfa392906ed5137eea2e25d3d

Save

12-04. MondayCRM Client secret / [monday_client_secret](#)

Used to establish OAuth authentication.

your_secret_here

Save

12-05. MondayCRM OAuth Redirect URI / [monday_redirect_uri](#)

Redirect URI configured in the monday app. It must exactly match the URI used to generate the OAuth code.

https://twinnmind.pro/

Save

12-06. MondayCRM OAuth Code / [monday_oauth_code](#)

One-time authorization code used only when Authentication Method is set to OAuth. The integration exchanges this code for a monday.com access token and stores that token in the Access Token attribute. Before generating the code, fill in Client ID, Client Secret, and OAuth Redirect URI. The redirect URI must exactly match the redirect URI configured in your monday app. To obtain a fresh code, [open the monday.com authorization page](#), approve the app, and copy the value from the code query parameter in the redirect URL. OAuth codes are temporary and one-time use. If setup fails or the code expires, generate a new code.

9a87bc6b7b0bf32135c13e21bcba8bb

Save

Figure S17. The OAuth fields — Client ID, Client Secret, Redirect URI, and OAuth Code.

4.2 Board Settings

Setting	What it does	Required
Activities ID (<code>activities_id</code>)	The ID of the Activities board (meetings/appointments).	Yes
Contacts ID (<code>contacts_id</code>)	The ID of the Contacts board (clients).	Yes
API Base URL (<code>monday_base_api_url</code>)	monday GraphQL endpoint. Default <code>https://api.monday.com/v2</code> — leave as-is.	No

12-07. MondayCRM Activities ID / [activities_id](#)

ID for Activities board.

5094654186

Save

12-08. MondayCRM Contacts ID / [contacts_id](#)

ID for Contacts board.

5094654192

Save

Figure S18. The board ID fields filled with numeric IDs from your monday URLs.

4.3 Feature On/Off Switches

Each feature can be independently enabled or disabled:

Setting	Default	What it controls
Enable Availability Check (monday_slots_available)	On	The agent can look up available time slots from the Activities board
Enable Booking (monday_booking_available)	On	The agent can create new meeting items
Enable Cancellation (monday_cancelation_available)	On	The agent can archive meeting items
Preload Availability on Session Start (monday_check_availability_on_conversation_start)	Off	Silently checks the calendar in the background before the caller asks

Recommended defaults for a new setup: leave all defaults as-is. Turn on **Preload Availability on Session Start** only if you want the agent to be slightly faster at the cost of an extra background API call per session.

4.4 Availability Tuning

Setting	Default	What it does
Slot Duration (monday_duration)	30	Length (in minutes) of an availability slot. The agent slices the day into slots of this size.
Days Ahead (monday_show_for_days)	1	How many days into the future to look at when computing availability.
Timezone (monday_timezone)	Project timezone	Controls how phrases like "3 pm tomorrow" are interpreted before being sent to monday in UTC.

4.5 Save and Publish

Important — Save each attribute individually. After editing any attribute value in the Newo admin panel, click **Save** on **that attribute** before moving on. Changes that are not saved will be discarded when you publish.

Once every attribute you changed has been saved:

1. Double-check that each field shows its new value (a saved attribute keeps the value after you click away).
2. Click **Publish All** to deploy the changes to your AI agent.

utes

Publish All

Profile

Q Search by idn, title, group

Show Hidden

12. MondayCRM Settings

12-01. MondayCRM Authentication Method / [monday_auth_type](#)

Choose how the agent will connect to monday.com.
OAuth: use a monday app authorization code during setup. The integration exchanges it for an access token.
Token: paste a monday API token directly. Use this for manual setup or testing.

OAuth

Save

12-02. MondayCRM API Token / [monday_api_token](#)

Paste a monday.com API token here when Authentication Method is set to Token. You can find it in monday.com developer/API settings.

your api token here

Save

Figure S19. Save each attribute, then click Publish All to deploy the changes.

5. What the AI Agent Can Do

5.1 Check Availability

The AI looks at your Activities board, finds the meetings already booked for the requested day, and offers free slots based on **Slot Duration** and **Days Ahead**.

Example: "Do you have anything tomorrow afternoon?" → the agent checks your Activities board and reads back the open times.

You will see in monday.com: no record is created at this step.

5.2 Book an Appointment

The AI books the appointment the caller confirms.

What happens automatically:

- Newo searches the Contacts board for the caller's phone number.
- If the contact does not exist, Newo creates a new contact (name + phone).
- A new meeting item is created on the Activities board with the right start/end time, type **Meeting**, status **Open**.
- The meeting item is linked to the contact via the `activity_item` connection.

You will see in monday.com: a new meeting item on the Activities board, plus a new or existing contact on the Contacts board.

5.3 Cancel an Appointment

The AI handles cancellation requests during the conversation.

You will see in monday.com: the meeting item is archived (not deleted — it can still be restored from the board's Archived view).

*The agent can only cancel an appointment it has context for. Make sure your Canvas includes the cancellation scenario (it is added automatically when **Auto-Setup Canvas Scenarios** runs on first publish — see Section 7).*

5.4 Recognize Returning Clients

When a call comes in with a caller ID, the AI looks up the phone number on the Contacts board and loads any upcoming meetings linked to that contact. The agent enters the conversation already knowing who's calling and what they have on the calendar.

You will see in monday.com: no record is created. This works silently in the background.

6. How to Test That Everything Works

Before going live, run through this checklist on a test contact.

6.1 After Setup

After clicking **Publish All**, confirm:

- ☐ **Authentication Method** is set to either `OAuth` or `Token`
- ☐ For Token mode: **API Token** is filled in
- ☐ For OAuth mode: **Access Token** is filled in (auto-populated by Newo after a successful exchange)
- ☐ **Activities ID** and **Contacts ID** match your boards
- ☐ No error messages appear in the publish log

6.2 Test Availability

1. Start a test chat or call session.
2. Ask: "What times are available tomorrow?"
3. Confirm the agent returns a list of times that match the gaps between meetings already on your Activities board.

6.3 Test Booking

1. Ask the agent to book a specific time (ideally outside your busy hours).
2. Provide a test name and phone number.
3. Open monday.com — a new meeting item should appear on the Activities board with the correct start/end time and a link to a contact on the Contacts board (a new contact is created if the test phone wasn't there).

6.4 Test Cancellation

1. Ask the agent to cancel the appointment created in step 6.3.
2. Open monday.com — the meeting item should now be in the Archived state on the Activities board.

6.5 Test Returning Client Recognition

1. Start a session from a phone number that already exists on your Contacts board.
2. The agent should greet the caller with context about their existing booking.

7. Canvas Auto-Setup

When the integration is published for the first time, Newo automatically updates your Canvas:

- conflicting default scheduling and cancellation scenarios are removed
- the **Via Agent** booking scenario is added from the Newo library — so the agent knows how to drive a booking conversation
- the **Via Agent** cancellation scenario is added — so the agent knows how to handle "I want to cancel my appointment"

What this means for you:

- you get a working starting point out of the box
- you can customize these scenarios for your business
- if you make significant Canvas customizations, re-test after any reconnect or Publish

These are starter templates, not a finished conversation design. Review them and adjust to match your business language and workflows.

8. Reconnecting and Rotating Credentials

When do I need to reconnect?

- The OAuth access token has been revoked or your monday app was uninstalled
- You rotated or regenerated the API token in monday
- The agent suddenly stopped checking availability, booking, or cancelling
- You changed the redirect URI on your monday app

How to rotate the API Token

1. In monday's Developer Center, open the API Token page and click **Regenerate**. The old token stops working immediately.
2. Copy the new token.
3. Paste it into the **API Token** field in Newo.
4. Click **Save** and then **Publish All**.
5. Run a quick availability test.

How to re-authorize OAuth

1. Generate a fresh OAuth code by reopening the **Making OAuth request** link from your monday app and approving again.
2. Paste the new code into the **OAuth Code** field in Newo.
3. Click **Save** and then **Publish All**.
4. Confirm a new value appears in the **Access Token** field.
5. Run a quick availability test.

The safe reconnect rule

Any time you change credentials, always do all three:

1. **Save** the attribute
2. **Publish All**
3. Run at least one live test (availability or booking)

9. Troubleshooting

I'm nervous about sharing the API token

- You can **regenerate the API token** in the monday Developer Center at any time. The moment you do, the old token stops working.
- If you ever want to disconnect the agent entirely, regenerate the token (Token mode) or revoke the OAuth app (OAuth mode). Access is cut off immediately.

10. FAQ

Does this create real records in monday.com? Yes. Bookings, cancellations, and contact creation all happen on your live monday boards.

Which connection method should I use? Use **API Token** unless your implementation partner has a specific reason to use OAuth. Both methods give the agent the same capabilities.

Can one setup handle multiple monday accounts? No. Each Newo project connects to one monday account and one pair of boards. Use separate Newo projects for separate monday accounts.

Can I use my existing monday boards? Yes — as long as they have the required column IDs (see Section 2). If your boards use different column IDs, either rename them to match or contact us.

Can the agent recognize returning customers automatically? Yes — when the caller's phone number is available, the agent looks them up on the Contacts board and pulls their upcoming bookings into the conversation.

Does the integration support rescheduling? Not directly. The agent will cancel the existing booking and create a new one for the new time.

What does Canvas Auto-Setup do? On first publish, Newo removes conflicting default scenarios from your Canvas and installs the Via Agent booking and cancellation scenarios from the library. These are starting templates — review and customize them for your business.

Can the agent detect the caller's timezone? Times are interpreted using the `monday_timezone` attribute. If you operate across multiple timezones, talk to us about per-conversation timezone overrides.

What happens if my OAuth access token expires? Re-run the OAuth flow (Section 8). Paste a fresh OAuth code, Save, and Publish All — Newo will exchange it for a new access token and overwrite the old one.

What is the safest first test? Ask the agent for tomorrow's availability. It only reads from the board (no records are created), so it's a safe way to confirm the connection works.

11. Support Handoff Notes

When handing off to a support or partner team, make sure they know:

- which connection method is active (Token or OAuth)
- which monday account is connected
- the **Activities ID** and **Contacts ID** in use
- which features are enabled or disabled
- whether Canvas Auto-Setup was used or the Canvas was customized afterwards

The two most common fixes for any issue:

1. Reconnect credentials and click **Publish All**
2. Run a quick availability or booking test to confirm recovery