GoHighLevel Integration Guide

1. What This Integration Does

The Newo AI Agent integrates with GoHighLevel so your AI can act as a full scheduling and CRM assistant for your business.

Once connected, the AI agent can:

- check appointment availability in your GHL calendar and offer time slots to callers
- book appointments and automatically create or update the contact in GHL
- cancel and reschedule existing appointments
- recognize returning clients by phone number and pull their upcoming bookings
- sync every conversation back into GHL — as a conversation message and a contact note
- automatically move leads through your GHL pipeline based on the call outcome
- trigger outbound calls and SMS directly from GHL Workflows using native Marketplace actions

In plain terms: the AI handles calls and chats, uses GHL as its calendar and CRM backend, and writes everything back into GHL so your team always has full context.

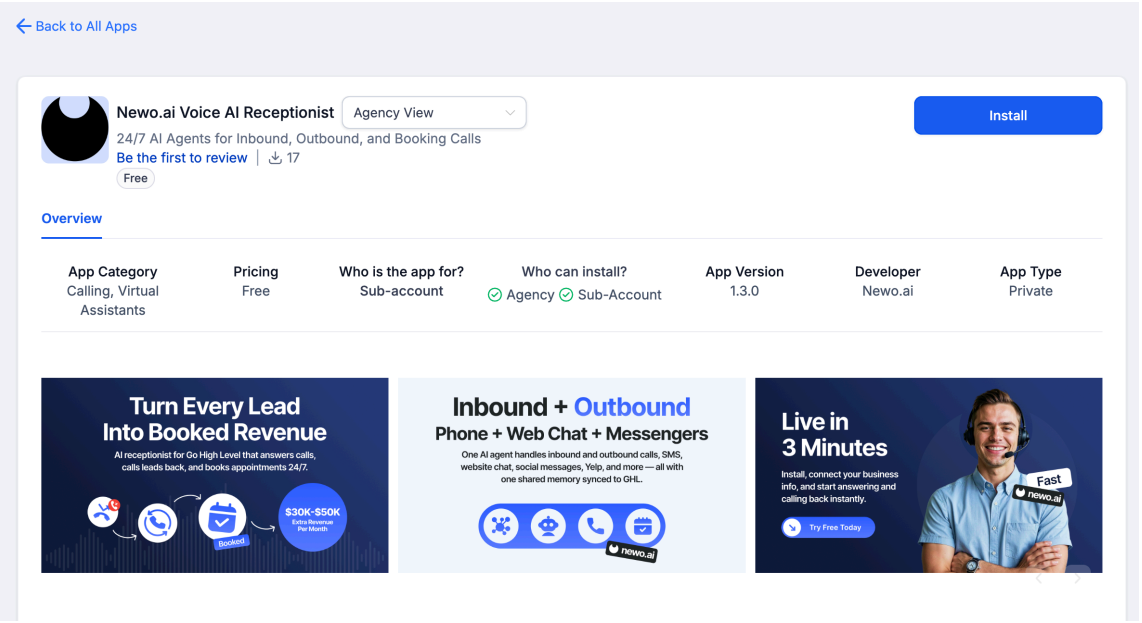

Figure S01. Entry point for starting GoHighLevel integration setup in Newo.

2. Before You Start

Make sure you have:

- an active GoHighLevel account
- access to the correct GHL sub-account (location) you want to connect
- access to the Newo project builder for your project
- permission to edit project settings and publish

You will also need one of the following:

- **OAuth** — recommended. You will be redirected to GHL to approve the connection.
- **Private Token** — for manual setups. You generate a token inside GHL and paste it into Newo.

> ***Which should I use?*** *Use OAuth unless your implementation partner has specifically asked you to use a Private Token. OAuth is more reliable and gives you access to the full feature set.*

3. Connecting for the First Time

3.1 Connect with OAuth (Recommended)

1. Open your project in Newo and go to **Builder → Attributes**.
2. Find the **GoHighLevel** section.
3. Set **Auth Type** to `OAuth`.
4. Click the authorization link shown in the **OAuth Code** field description.
5. Log in to GoHighLevel and approve the requested permissions.
6. Select the correct sub-account / location.
7. After the redirect, copy the authorization code from the result page.
8. Paste it into the **OAuth Code** field in Newo.
9. Fill in your **GHL Location ID**.
10. Click **Save**.
11. Click **Publish All**.

What happens after Publish:

- Newo connects to your GHL account
- Your calendars appear in the **Default Calendar** dropdown
- Your pipelines appear in the **Default Pipeline** dropdown
- The integration is ready to handle conversations

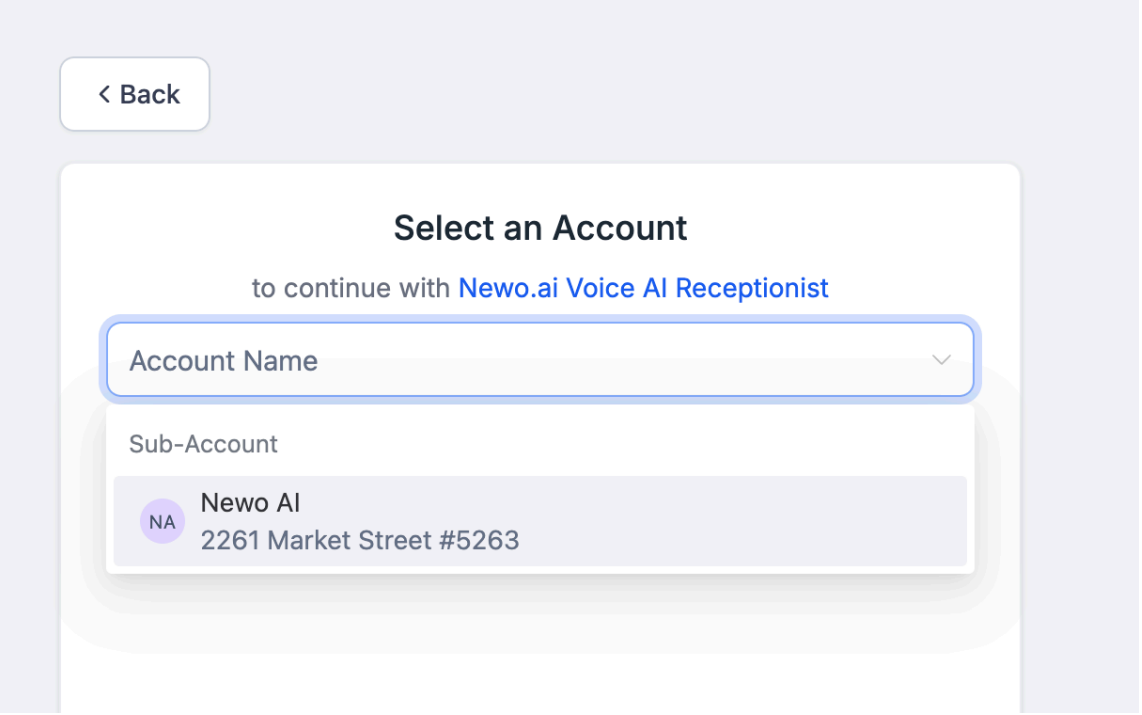

Figure S03. OAuth authorization screen in GoHighLevel — approve the connection here.

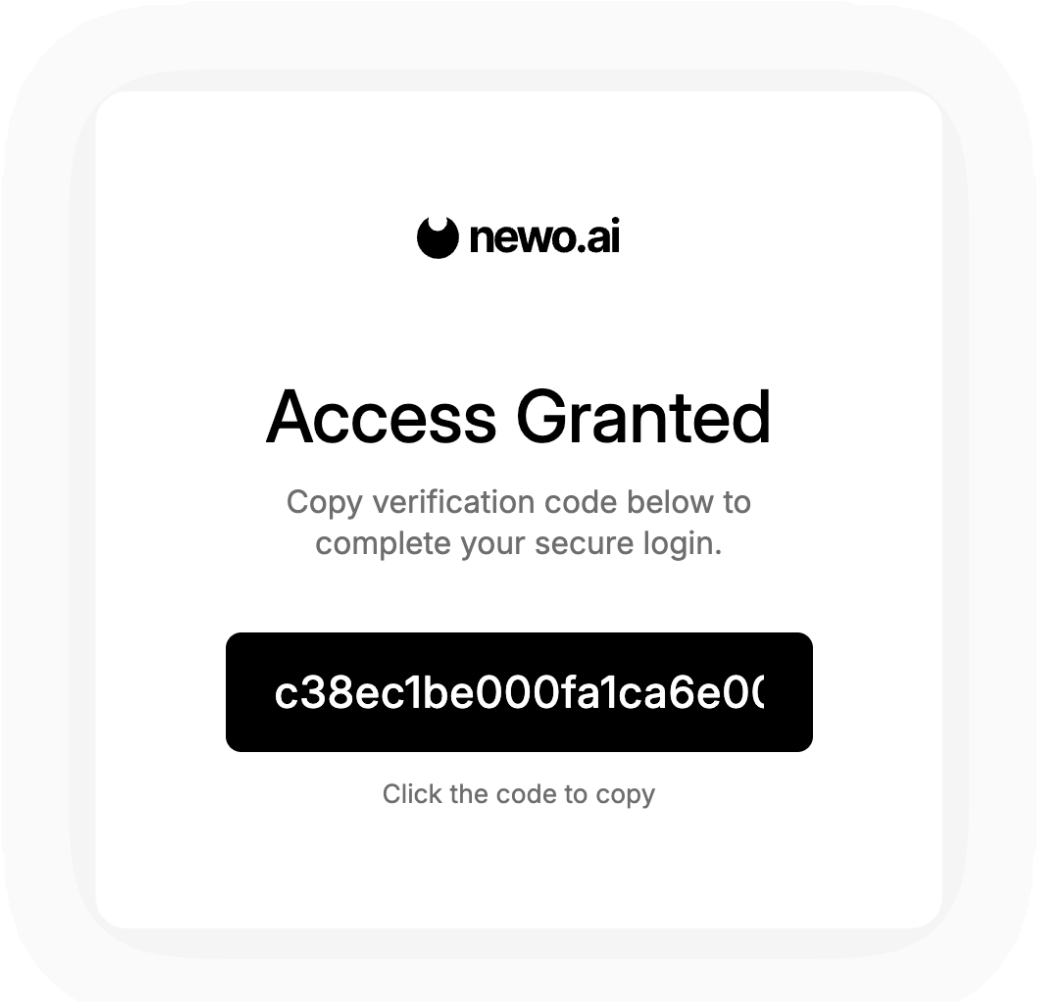

Figure S04. Copy the authorization code from this page and paste it into Newo.

3.2 Connect with Private Token

Use this method only if your implementation partner has instructed you to.

1. In GoHighLevel, go to **Settings → Integrations → Private Integrations**.
2. Create a new integration or open an existing one.
3. Generate a token and copy it.
4. In Newo, set **Auth Type** to `Token`.
5. Paste the token into the **Private Token** field.
6. Fill in your **GHL Location ID**.
7. Click **Save** and then **Publish All**.

> ***Important:*** *The token must have access to contacts, calendars, conversations, pipelines, and custom values. If some features stop working after setup, your token may be missing required permissions.*

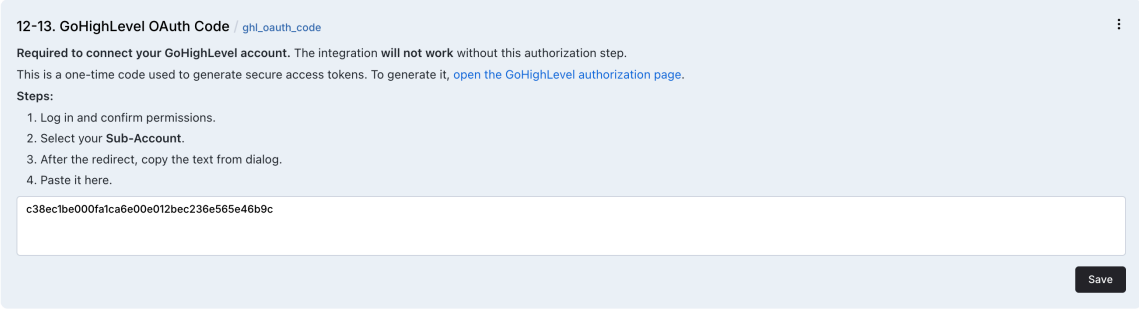

Figure S05. GoHighLevel Private Integration screen — generate and copy your token here.

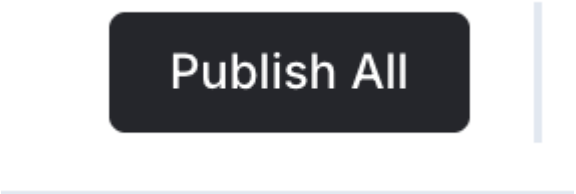

Figure S06. After clicking Publish All, verify that calendars and pipelines appear in their dropdowns.

4. Settings Reference

You can find all settings in **Builder → Attributes → GoHighLevel**.

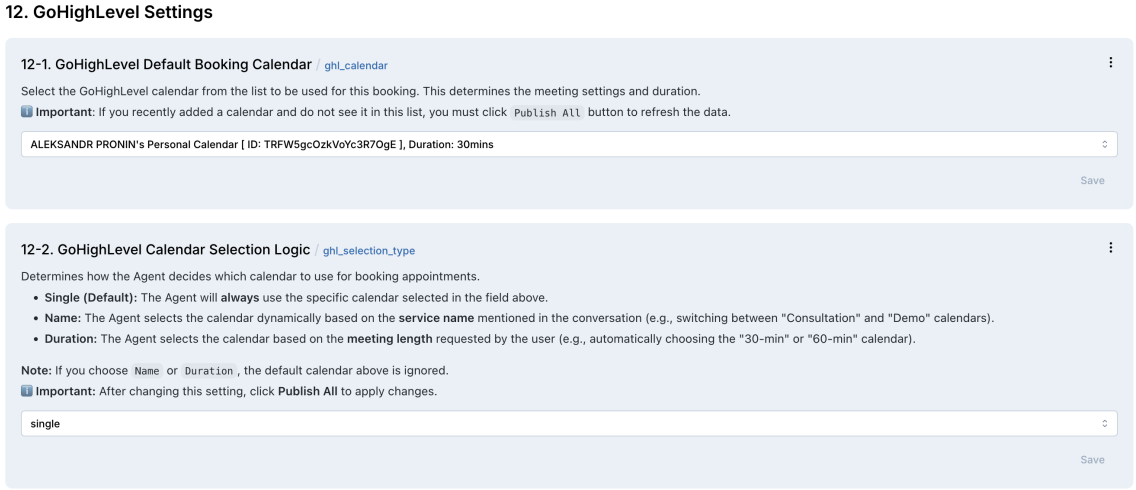

Figure S07. The GoHighLevel settings block in Newo Builder.

4.1 Connection Settings

Setting	What it does	Required
Auth Type	Choose `OAuth` (recommended) or `Token`	Yes

OAuth Code	Authorization code from the GHL redirect. Only needed for OAuth.	OAuth only
Private Token	Token generated inside GHL Private Integrations. Only needed for Token method.	Token only
GHL Location ID	The ID of your GHL sub-account / location. Found in GHL Settings → Business Info.	Yes

4.2 Feature On/Off Switches

Each feature can be independently enabled or disabled:

Setting	Default	What it controls
Enable Availability Check	On	The agent can look up available time slots
Enable Booking	On	The agent can create appointments
Enable Cancellation	On	The agent can cancel appointments
Check Existing Clients	On	The agent recognizes returning callers by phone
Sync Conversation to GHL	On	The call/chat is written back to GHL as a conversation message
Save Client History Notes	On	A summary or transcript is added to the contact's notes
Update Pipeline Stage	Off	The agent moves the lead to a pipeline stage after the call
Auto-Setup Canvas Scenarios	On	Default booking and cancellation scenarios are added to Canvas automatically

> ***Recommended defaults for a new setup:*** *leave all defaults as-is. Turn on* ***Update Pipeline Stage*** *only after you have written clear rules for when to move leads and have tested it on a demo contact.*

4.3 Calendar Settings

Setting	What it does
Calendar Selection Mode	How the agent picks a calendar. Options: `single`, `by name`, `by duration`. Default: `single`.
Default Calendar	The calendar to use when mode is `single`. Populated automatically after Publish.
Calendar Selection Instructions	(Used with `by name` or `by duration` mode.) Tell the AI how to choose between calendars.

Which Calendar Selection Mode to use:

- **Single** — the agent always uses the same calendar. Best for most businesses. Use this unless you have multiple calendar types.

- **By Name** — the agent picks the calendar based on what the customer asks for (e.g. "I want to book a consultation with Dr. Smith"). Requires clear instructions.
- **By Duration** — the agent picks the calendar based on the desired appointment length. Useful when your calendars are organized by duration.

4.4 Pipeline Settings

Setting	What it does
Default Pipeline	The GHL pipeline to update after sessions. Populated automatically after Publish.
Pipeline Stage Rules	Instructions for the AI on how to choose which stage to move the lead to.

> ***Tip:*** *Write pipeline rules in plain language, e.g. "If the caller booked an appointment, move to Booked. If they asked to call back later, move to Follow-Up. If they are not interested, move to Closed - Lost."*

4.5 Advanced Settings

These are safe to leave at defaults unless your implementation partner has specific requirements.

Setting	Default	What it does
Use Timezone from Conversation	Off	Extract the caller's timezone from the conversation context
Preload Availability on Session Start	Off	Check the calendar in the background before the caller asks

5. What the AI Agent Can Do

5.1 Check Availability

The AI searches your GHL calendar for free slots and offers them to the caller.

Example: *"Do you have availability tomorrow afternoon?"* → the agent checks your calendar and reads back available times.

You will see in GHL: no record is created at this step.

5.2 Book an Appointment

The AI books the appointment the caller confirms.

What happens automatically:

- Newo searches GHL for the caller's contact by phone number
- If the contact does not exist, Newo creates it
- The appointment is created in the selected GHL calendar
- The contact is linked to the appointment

You will see in GHL: a new appointment in your calendar and a new or updated contact.

5.3 Cancel an Appointment

The AI handles cancellation requests during the conversation.

You will see in GHL: the appointment status is changed to Cancelled.

> *The agent can only cancel an appointment it has context for. Make sure your Canvas includes a cancellation scenario (it is added automatically when **Auto-Setup Canvas Scenarios** is enabled).*

5.4 Reschedule an Appointment

The AI updates the start time of an existing appointment to a new time the caller confirms.

You will see in GHL: the same appointment record with an updated time.

5.5 Recognize Returning Clients

When a call comes in with a caller ID, the AI looks up the phone number in GHL and loads any upcoming bookings for that contact. This gives the agent context before the conversation even starts.

You will see in GHL: no record created. This works silently in the background.

5.6 Sync Conversation to GHL

After every call or chat, the AI writes the conversation outcome back to GHL:

- a conversation message is added to the contact's GHL Conversations
- a note with call summary or transcript is saved to the contact

You will see in GHL: a new message in the contact's Conversations tab and a new note in their Notes tab.

5.7 Update Pipeline Stage

If enabled, the AI evaluates the call outcome and moves the contact's opportunity to the appropriate pipeline stage.

You will see in GHL: the contact's opportunity updated to the new stage.

6. How to Test That Everything Works

Before going live, run through this checklist on a demo contact.

6.1 After Setup

After clicking **Publish All**, confirm:

- [ ] The **Default Calendar** dropdown shows your GHL calendars
- [ ] The **Default Pipeline** dropdown shows your GHL pipelines (if pipeline update is enabled)
- [ ] No error messages appear in the publish log

6.2 Test Availability

1. Start a test chat or call session.
2. Ask for available times.
3. Confirm the agent returns real time slots from your GHL calendar.

6.3 Test Booking

1. Ask the agent to book a specific time.
2. Provide a test name and phone number.

3. Check GHL — a new appointment should appear in your calendar, and the contact should be created or updated.

6.4 Test Cancellation

1. Use the appointment created in the booking test.
2. Ask the agent to cancel it.
3. Check GHL — the appointment status should be Cancelled.

6.5 Test Reschedule

1. Use an existing appointment.
2. Ask the agent to move it to a different time.
3. Check GHL — the appointment time should be updated.

6.6 Test Returning Client Recognition

1. Start a session where the caller phone number is provided.
2. The agent should greet the caller with context about their existing booking.

6.7 Test Post-Call Sync

1. Complete a test call.
2. End the session.
3. Check the contact in GHL:
    - ☐ A new message appears in Conversations
    - ☐ A note appears in Notes
    - ☐ The pipeline stage was updated (if enabled)

7. Reconnecting and Rotating Credentials

When do I need to reconnect?

- The OAuth connection has expired or been revoked
- You rotated the Private Token
- Calendars or pipelines stopped showing up after Publish
- Certain features suddenly stopped working after changes on the GHL side

How to reconnect OAuth

1. Generate a fresh authorization code by opening the authorization link again.
2. Paste the new code into the **OAuth Code** field.
3. Click **Save** and then **Publish All**.
4. Confirm calendars and pipelines refresh.
5. Run a quick availability test.

How to rotate a Private Token

1. Generate a new token in GHL (Settings → Integrations → Private Integrations).
2. Paste it into the **Private Token** field in Newo.
3. Click **Save** and then **Publish All**.
4. Run a quick test.

The safe reconnect rule

Any time you change credentials, always do all three:

1. **Save** the attributes
2. **Publish All**
3. Run at least one live test (availability or booking)

8. Canvas Auto-Setup

When **Auto-Setup Canvas Scenarios** is enabled, Newo automatically adds ready-made conversation building blocks to your Canvas after the first Publish.

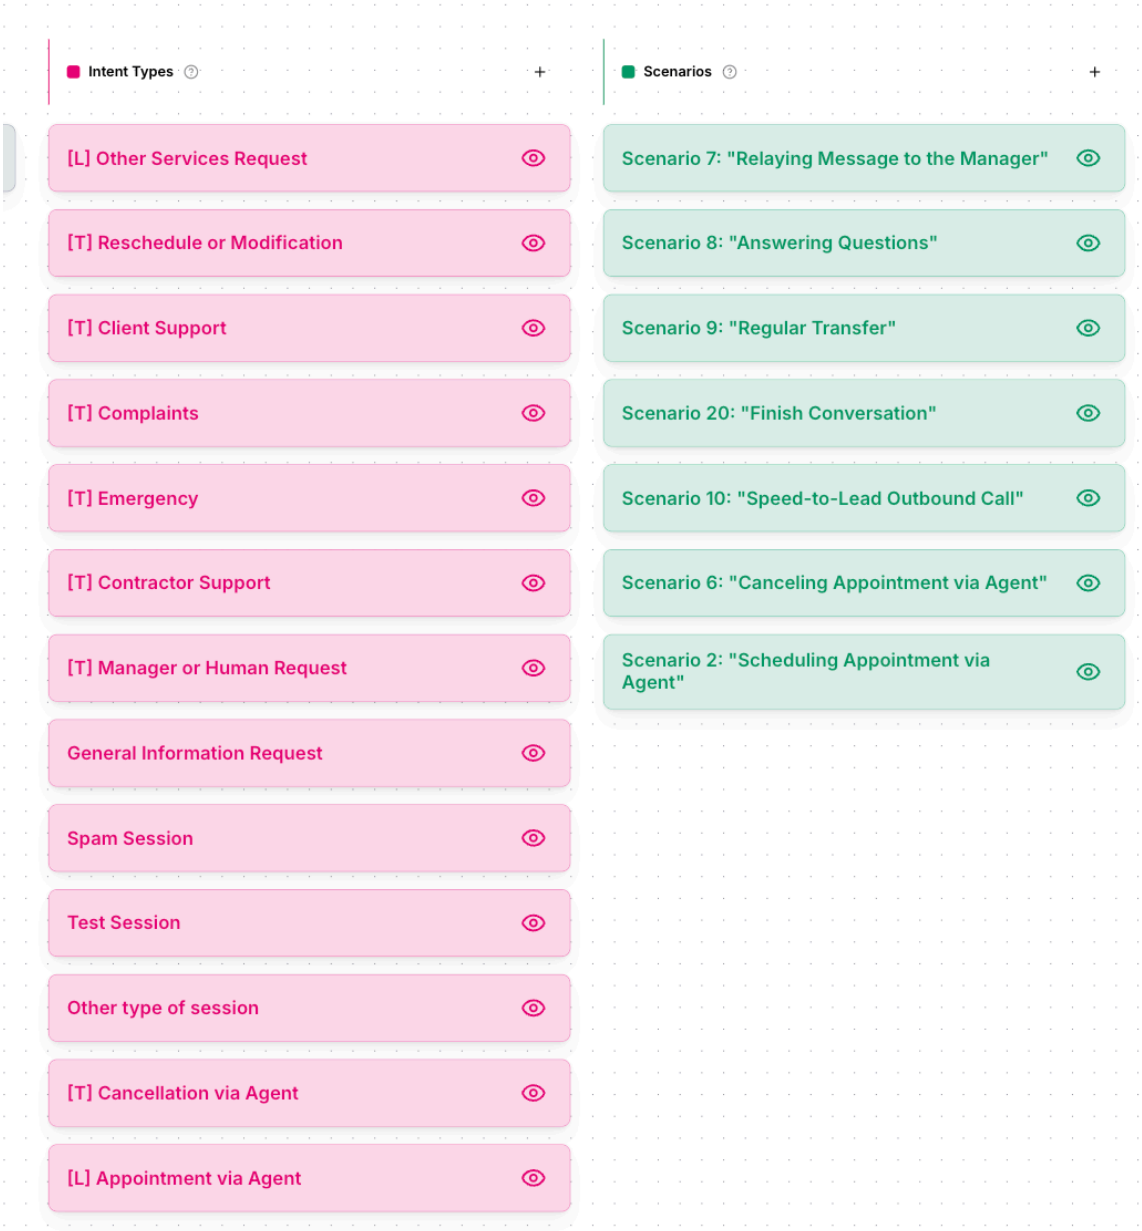

Figure S08. Canvas after automatic setup — default booking and cancellation scenarios are already inserted.

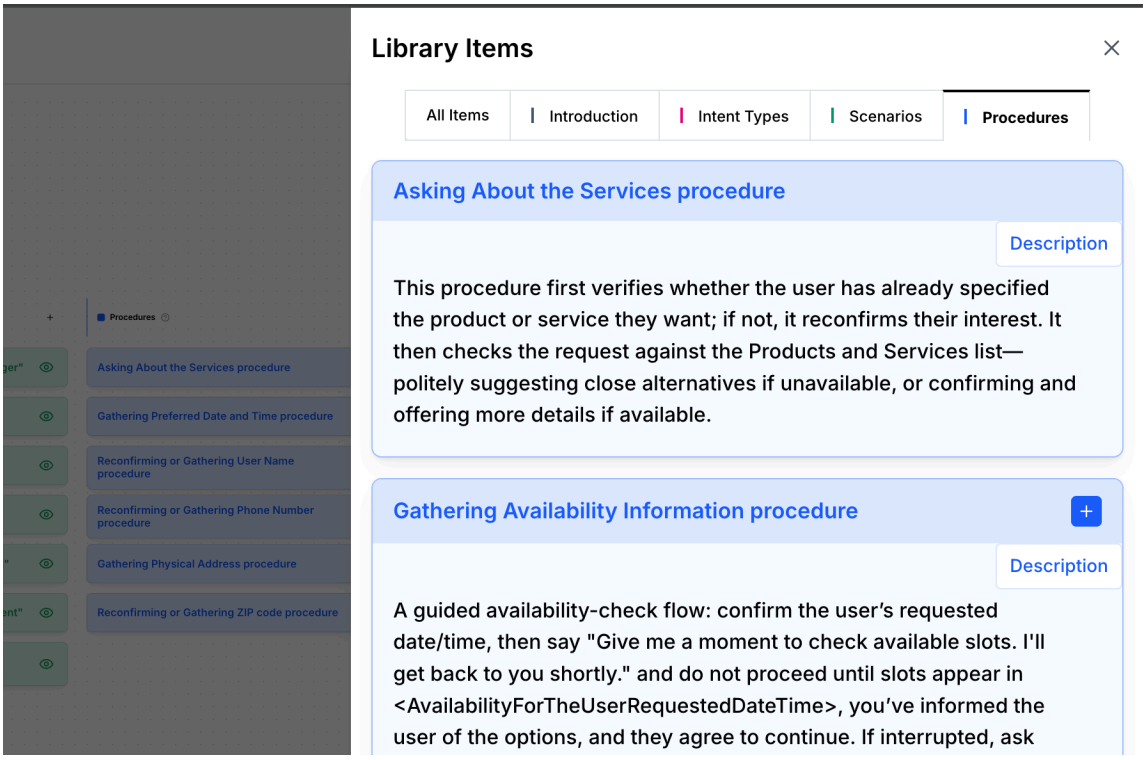

Figure S09. The scenario library showing the GoHighLevel-related Canvas items added automatically.

What is added automatically:

- A cancellation intent and cancellation scenario — so the agent knows how to handle "I want to cancel my appointment"
- An appointment scheduling scenario — a starting template for booking conversations
- A speed-to-lead outbound call scenario — for immediate follow-up on new leads

What this means for you:

- You get a working starting point out of the box
- You can customize these scenarios for your business
- If you make significant customizations, re-test after any reconnect or Publish

> *These are starter templates, not a finished conversation design. Review them and adjust to match your business language and workflows.*

9. Automations You Can Build in GoHighLevel

Beyond the AI handling calls, you can build automations in GHL Workflows that react to what the AI did.

There are two ways to do this:

Option A — Trigger Newo from GHL: Use the Newo native actions installed through the Marketplace app to launch outbound calls or send SMS directly from a GHL Workflow.

Option B — React in GHL to what Newo logged: After a call ends, Newo writes the outcome to GHL. You can use that data to branch your GHL Workflows (e.g. send an SMS if the call went to voicemail).

Both can be used together.

9.1 Trigger an Outbound Call from a GHL Workflow

The Marketplace app adds a native Newo action inside the GHL Workflow Builder. This lets you launch an AI outbound call directly from any GHL automation trigger.

Common use cases:

- Call a new lead immediately after they fill out a form
- Call a lead when their pipeline stage changes
- Trigger a callback after a missed call

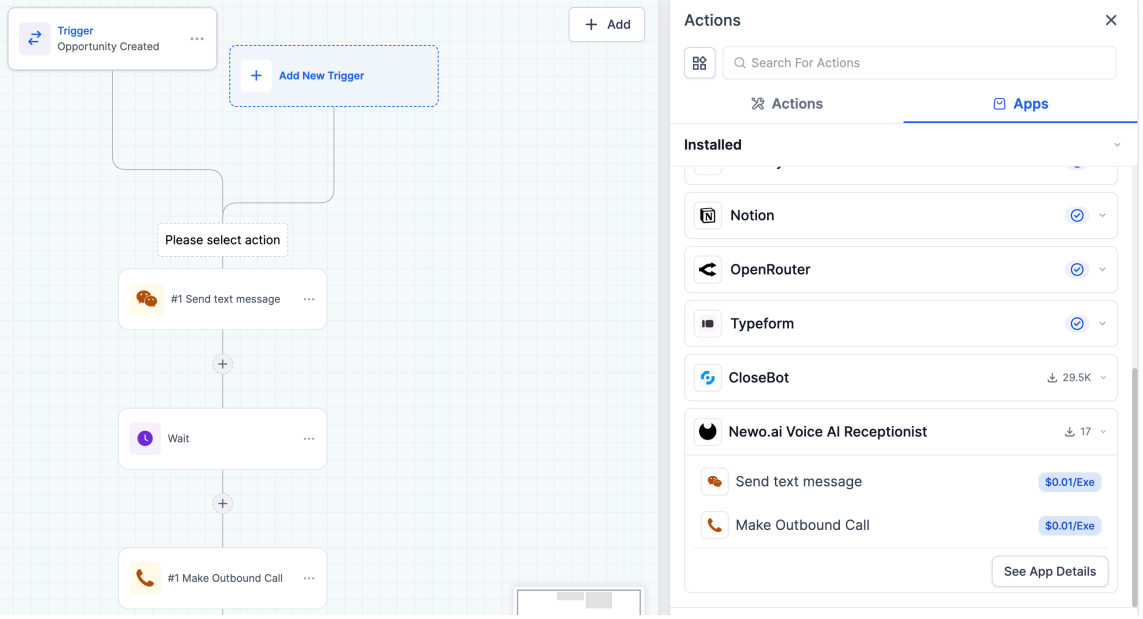

Figure S10. GoHighLevel workflow builder with the Newo outbound call action selected.

How to set it up:

1. In GoHighLevel, open **Automation → Workflows**.
2. Create a new workflow or edit an existing one.
3. Choose your trigger (e.g. *Contact Created*, *Form Submitted*, *Opportunity Stage Changed*).
4. Add a new action and select the Newo outbound call action from the Marketplace app.
5. Map the fields:
    - Contact phone → **Phone Number**
    - Contact name → **Contact Name**
    - Your Newo API key → **API Key**
    - Optional: add a custom instruction → **Agent Instruction**
6. Publish the workflow.
7. Test on a demo contact first.

Agent Instruction examples:

- *"Introduce yourself as our clinic's AI assistant and help the lead schedule a consultation."*
- *"This lead missed our previous call. Ask if they have a moment to talk and offer to book a callback if not."*
- *"Follow up on their form submission and qualify their interest before offering to book."*

Make Outbound Call

Makes an outbound call to the contact.

ACTION NAME

Make Outbound Call

NEWO.AI API KEY *

{{custom_values.newo_api_key}}

Enter the API key from your Newo.ai agent.

CONTACT PHONE NUMBER *

{{contact.phone_raw}}

Contact phone number

CONTACT NAME *

{{contact.name}}

The agent will use the contact's name during the outbound call.

AGENT INSTRUCTION *

Client is interested in: {{contact.job_type}}, client's zip code is {{contact.zip_code}} and Company name is {{contact.company_name_test}}

During the conversation, follow **Speed-to-Lead Outbound Call* * scenario.

Enter the complete instructions the agent should follow during the outbound

Delete | Cancel | Save Action

Figure S11. Outbound call action configured with phone, name, API key, and agent instruction fields mapped.

9.2 Trigger an SMS from a GHL Workflow

The Marketplace app also includes a native SMS action. It works the same way as the outbound call action — add it to a workflow, map the fields, and Newo sends the SMS.

Common use cases:

- Send an SMS follow-up after a missed call
- Send a booking confirmation SMS
- Send a nurture message after a lead enters a pipeline stage

Send Text Message

Send Text Message

ACTION NAME

Send text message

NEWO.AI API KEY *

{{custom_values.newo_api_key}}

Enter the API key from your Newo.ai agent.

CONTACT PHONE NUMBER *

{{contact.phone_raw}}

Contact phone number

CONTACT NAME *

{{contact.name}}

The agent can use the contact's name for sms.

AGENT INSTRUCTION *

Send an SMS with the following content: "We have received yo request. Our specialist will contact you shortly. Payment link: {{trigger_link.ptlIZSFuwOJfzzLDMlwa}}"

Enter the full instruction that the agent will follow on the outbound call. You may include variables such as {{contact.phone_raw}} or {{contact.name}}.

Delete

Cancel

Save Action

Figure S13. Native SMS action configuration inside the GoHighLevel workflow builder.

9.3 React in GHL to Call Outcomes

After every session, Newo (if **Sync Conversation to GHL** is enabled) writes the call outcome to the contact record. You can use this in GHL Workflow conditions.

Available call outcome values:

Value	Meaning
`completed`	Call ended normally
`answered`	Call was answered
`voicemail`	Call reached voicemail
`no-answer`	Call was not answered
`busy`	Line was busy
`canceled`	Call was canceled before connecting
`failed`	Call failed technically

Example workflows:

Voicemail follow-up SMS:

- Trigger: conversation/contact updated
- Condition: call outcome = `voicemail`
- Action: send SMS — *"Sorry we missed you. Reply here if you'd like us to call back."*

Missed call callback queue:

- Trigger: conversation/contact updated
- Condition: call outcome = `no-answer`
- Actions: wait 10 minutes → create callback task or launch outbound call

Post-booking nurture:

- Trigger: opportunity updated
- Condition: stage moved to Booked
- Actions: send confirmation SMS → create follow-up reminder task

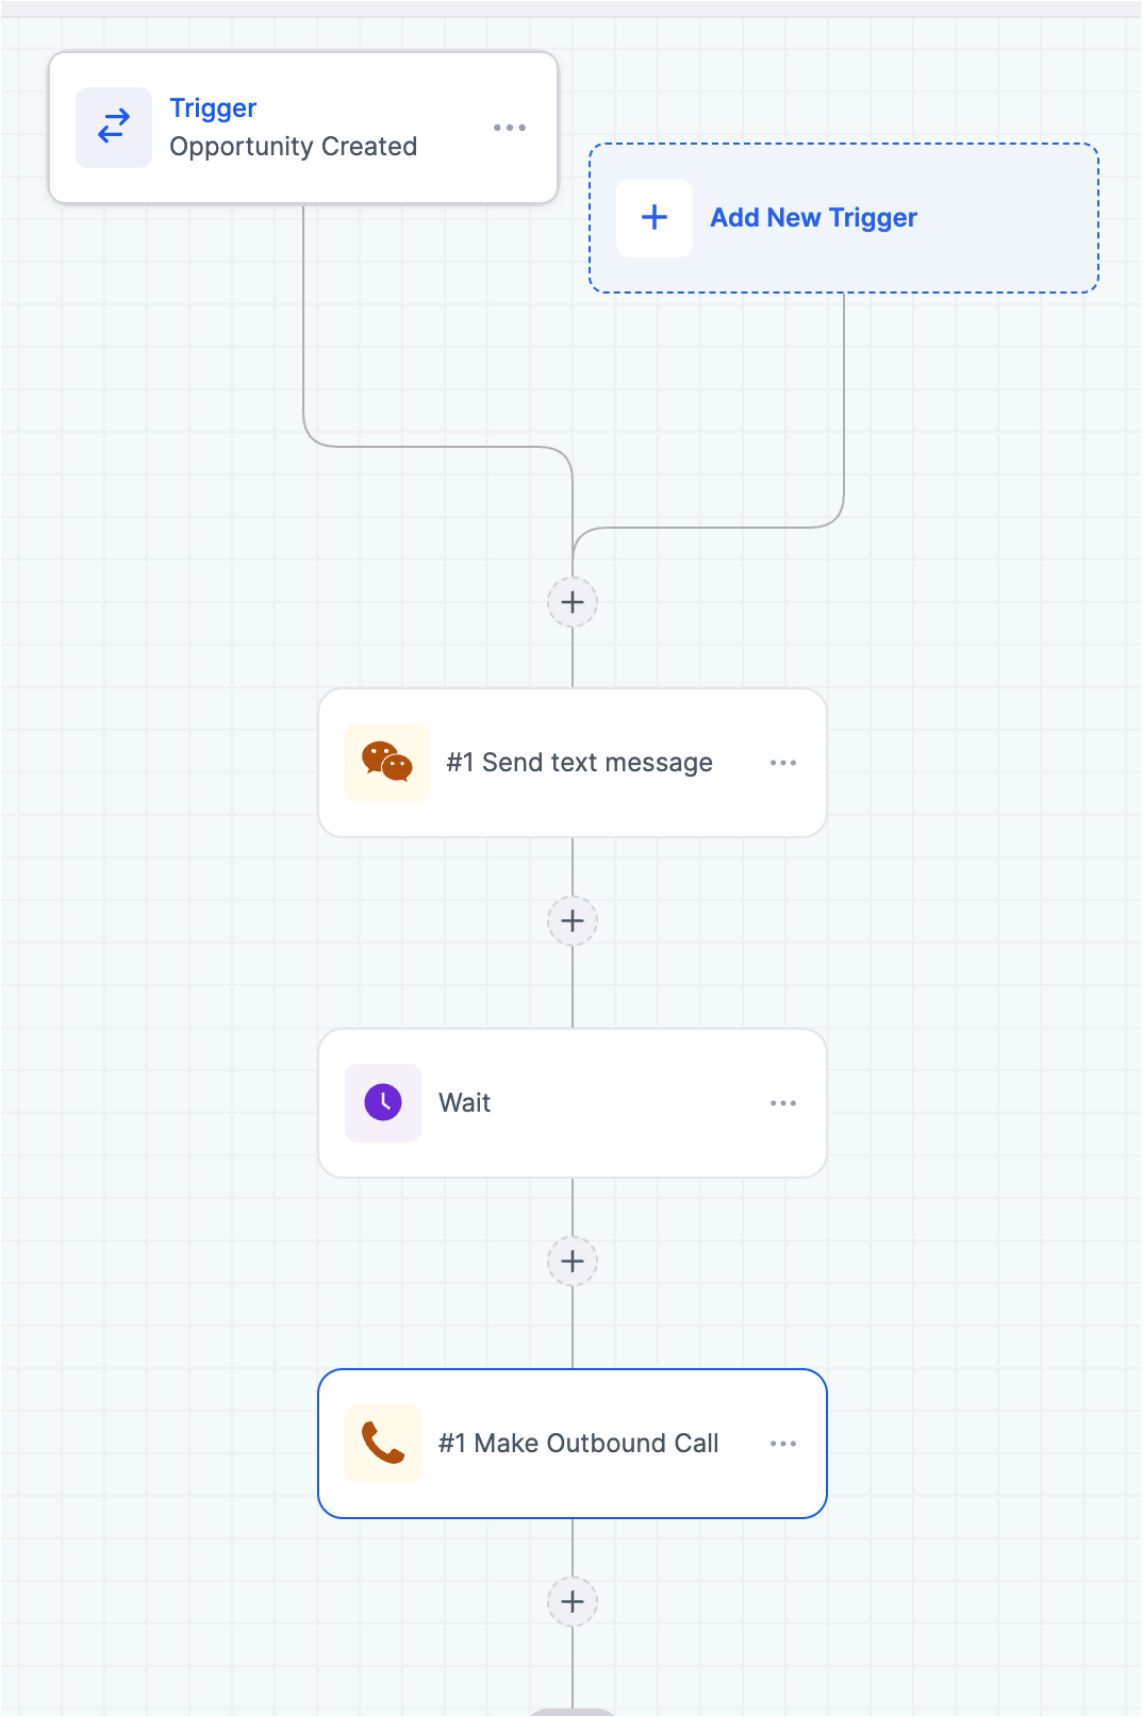
Trigger
Opportunity Created
Add New Trigger
#1 Send text message
Wait
#1 Make Outbound Call

Figure S12. A complete GHL workflow combining a Newo call action with native GHL steps like SMS and wait nodes.

9.4 Checklist Before Enabling Automations

- ☐ The Marketplace app is installed correctly (for native call/SMS actions)
- ☐ The Newo API key is filled in and valid
- ☐ The GHL workflow is published
- ☐ **Sync Conversation to GHL** is enabled in Newo settings (for outcome-based workflows)
- ☐ GHL has calling and/or SMS capability configured for your location
- ☐ Business hours rules are in place — do not call leads outside business hours
- ☐ Duplicate prevention is in place — do not call or SMS the same lead repeatedly
- ☐ The workflow is tested on a demo contact before enabling for real leads

10. Troubleshooting

Calendars or pipelines are not showing up after Publish

Likely cause: The authorization code or token was invalid, or the wrong Location ID was entered.

Fix:

1. Check that **Auth Type**, **OAuth Code** or **Private Token**, and **Location ID** are all correct.
2. Click **Publish All** again.
3. If still empty, reconnect credentials (see Section 7).

The agent is not booking appointments

Check:

- Is **Enable Booking** turned on?
- Is the correct calendar selected in **Default Calendar**?
- If using **by name** or **by duration** mode, are the Calendar Selection Instructions clear enough?

Quick fix: switch **Calendar Selection Mode** to `single` temporarily and test again.

The agent is not cancelling appointments

Check:

- Is **Enable Cancellation** turned on?
- Does the caller have a future appointment on record?
- Is the cancellation scenario present in Canvas?

The agent is using the wrong calendar

Check:

- If **Calendar Selection Mode** is `by name` or `by duration`, the instructions may be too vague.

Fix: click **Publish All** to refresh calendar metadata, then simplify the instructions or switch to `single` mode for debugging.

Nothing is appearing in GHL after the call ends

Check:

- Is **Sync Conversation to GHL** turned on?
- Did the session end normally (not cut off mid-call)?

Fix: ensure the setting is on and run a complete test session from start to finish.

No note is appearing on the contact

Check: Is **Save Client History Notes** turned on?

The pipeline stage is not updating

Check:

- Is **Update Pipeline Stage** turned on?
- Is a pipeline selected in **Default Pipeline**?
- Are the **Pipeline Stage Rules** written clearly enough for the AI to pick the right stage?

New calendars or pipelines I added in GHL are not appearing

Fix: click **Publish All**. Calendar and pipeline lists refresh on every publish.

The OAuth connection stopped working

Fix: generate a fresh authorization code and paste it into **OAuth Code**, then Save and Publish All.

The Private Token setup works partially but some features behave differently

Cause: the token may be missing required permissions, or your GHL account may require Marketplace-installed app behavior for certain features.

Fix: verify the token has full permissions for contacts, calendars, conversations, pipelines, and custom values. If issues persist, switch to OAuth.

The native outbound call action is not running

Check:

- Is the Newo API key filled in and valid?
- Is the contact phone number populated in GHL?
- Is the contact name populated?
- Is the GHL workflow published?
- Does the workflow branch actually reach the Newo action?

The native action returns "phone number is empty" or "contact name is empty"

Fix: check how the GHL workflow is mapping contact fields to the action inputs. Make sure the contact has a phone number and name before the workflow reaches the action.

A GHL workflow starts but no SMS or call happens

Check:

- Is GHL SMS / calling configured for this location?
- Are business hours or compliance rules blocking the action?
- Is the workflow action mapped to the correct sending number or channel?

The workflow fires too often

Fix: add deduplication conditions, wait steps, and a maximum retry limit to your GHL workflow.

11. FAQ

Does this create real records in GoHighLevel? Yes. Bookings, cancellations, contact updates, conversation messages, notes, and pipeline changes all happen in your live GHL account.

Can one setup handle multiple GHL locations? No. Each Newo project connects to one GHL location. Use separate projects for separate locations.

Which connection method should I use? Use **OAuth** unless your implementation partner has a specific reason to use a Private Token.

Why did newly added calendars not appear automatically? Because Newo refreshes calendar and pipeline data when you click **Publish All**. After adding a new calendar in GHL, publish the Newo project again.

Can the agent recognize returning customers automatically? Yes, when the caller's phone number is available and **Check Existing Clients** is enabled. The agent will look up the contact and their upcoming bookings before the conversation starts.

Does the integration support rescheduling? Yes. There is a dedicated reschedule flow that updates the existing appointment to a new time.

What does Auto-Setup Canvas Scenarios do? It automatically inserts ready-made booking, cancellation, and speed-to-lead scenarios into your Canvas when the project is published. These are starting templates — review and customize them for your business.

Can the agent detect the caller's timezone? Yes, if **Use Timezone from Conversation** is enabled.

Can I still build GHL automations with a Private Token setup? Yes, but some features may behave differently depending on the token's permissions and your GHL account type. If something is inconsistent, switching to OAuth is the safer option.

What is the safest first automation to test? An SMS follow-up after a voicemail outcome. It is low-risk, easy to verify, and a good starting point before building more complex retry or callback logic.

12. Support Handoff Notes

When handing off to a support or partner team, make sure they know:

- which connection method is active (OAuth or Private Token)
- which GHL location is connected (Location ID)
- which features are enabled or disabled
- whether Canvas Auto-Setup was used

- whether the deployment uses the Marketplace app for native actions

The two most common fixes for any issue:

1. Reconnect credentials and click **Publish All**
2. Run a quick availability or booking test to confirm recovery