

In [2]: `# import python libraries`

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt # visualizing data
%matplotlib inline
import seaborn as sns
```

C:\Users\twisha\anaconda3\lib\site-packages\scipy\\_\_init\_\_.py:146: UserWarning: A NumPy version >=1.16.5 and <1.23.0 is required for this version of SciPy (detected version 1.26.0  
warnings.warn(f"A NumPy version >={np\_minversion} and <{np\_maxversion}")

In [3]: `# import csv file`

```
df = pd.read_csv('Diwali Sales Data.csv', encoding= 'unicode_escape')
```

In [4]: `df.shape`

Out[4]: (11251, 15)

In [5]: `df.head()`

Out[5]:

	User_ID	Cust_name	Product_ID	Gender	Age Group	Age	Marital_Status	State	Zone	Occupation	Product_Category	Orders	Amou
0	1002903	Sanskriti	P00125942	F	26-35	28	0	Maharashtra	Western	Healthcare	Auto	1	23952
1	1000732	Kartik	P00110942	F	26-35	35	1	Andhra Pradesh	Southern	Govt	Auto	3	23934
2	1001990	Bindu	P00118542	F	26-35	35	1	Uttar Pradesh	Central	Automobile	Auto	3	23924
3	1001425	Sudevi	P00237842	M	0-17	16	0	Karnataka	Southern	Construction	Auto	2	23912
4	1000588	Joni	P00057942	M	26-35	28	1	Gujarat	Western	Food Processing	Auto	2	23877



In [6]: df.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 11251 entries, 0 to 11250
Data columns (total 15 columns):
#   Column                Non-Null Count  Dtype
---  -
0   User_ID               11251 non-null  int64
1   Cust_name             11251 non-null  object
2   Product_ID           11251 non-null  object
3   Gender                11251 non-null  object
4   Age Group             11251 non-null  object
5   Age                   11251 non-null  int64
6   Marital_Status        11251 non-null  int64
7   State                 11251 non-null  object
8   Zone                  11251 non-null  object
9   Occupation            11251 non-null  object
10  Product_Category      11251 non-null  object
11  Orders                11251 non-null  int64
12  Amount                11239 non-null  float64
13  Status                 0 non-null      float64
14  unnamed1              0 non-null      float64
dtypes: float64(3), int64(4), object(8)
memory usage: 1.3+ MB
```

In [7]: *#drop unrelated/blank columns*  
df.drop(['Status', 'unnamed1'], axis=1, inplace=True)

```
In [8]: #check for null values
pd.isnull(df).sum()
```

```
Out[8]: User_ID          0
Cust_name          0
Product_ID         0
Gender             0
Age Group          0
Age               0
Marital_Status     0
State             0
Zone              0
Occupation         0
Product_Category   0
Orders            0
Amount            12
dtype: int64
```

```
In [9]: # drop null values
df.dropna(inplace=True)
```

```
In [10]: # change data type
df['Amount'] = df['Amount'].astype('int')
```

```
In [11]: df['Amount'].dtypes
```

```
Out[11]: dtype('int32')
```

```
In [12]: df.columns
```

```
Out[12]: Index(['User_ID', 'Cust_name', 'Product_ID', 'Gender', 'Age Group', 'Age',
               'Marital_Status', 'State', 'Zone', 'Occupation', 'Product_Category',
               'Orders', 'Amount'],
              dtype='object')
```

```
In [12]: #rename column
df.rename(columns= {'Marital_Status':'Shaadi'})
```

Out[12]:

	User_ID	Cust_name	Product_ID	Gender	Age Group	Age	Shaadi	State	Zone	Occupation	Product_Category	Orders	Amount
0	1002903	Sanskriti	P00125942	F	26-35	28	0	Maharashtra	Western	Healthcare	Auto	1	23952
1	1000732	Kartik	P00110942	F	26-35	35	1	Andhra Pradesh	Southern	Govt	Auto	3	23934
2	1001990	Bindu	P00118542	F	26-35	35	1	Uttar Pradesh	Central	Automobile	Auto	3	23924
3	1001425	Sudevi	P00237842	M	0-17	16	0	Karnataka	Southern	Construction	Auto	2	23912
4	1000588	Joni	P00057942	M	26-35	28	1	Gujarat	Western	Food Processing	Auto	2	23877
...	...	...	...	...	...	...	...	...	...	...	...	...	...
11246	1000695	Manning	P00296942	M	18-25	19	1	Maharashtra	Western	Chemical	Office	4	370
11247	1004089	Reichenbach	P00171342	M	26-35	33	0	Haryana	Northern	Healthcare	Veterinary	3	367
11248	1001209	Oshin	P00201342	F	36-45	40	0	Madhya Pradesh	Central	Textile	Office	4	213
11249	1004023	Noonan	P00059442	M	36-45	37	0	Karnataka	Southern	Agriculture	Office	3	206
11250	1002744	Brumley	P00281742	F	18-25	19	0	Maharashtra	Western	Healthcare	Office	3	188

11239 rows × 13 columns



```
In [13]: # describe() method returns description of the data in the DataFrame (i.e. count, mean, std, etc)
df.describe()
```

Out[13]:

	User_ID	Age	Marital_Status	Orders	Amount
count	1.123900e+04	11239.000000	11239.000000	11239.000000	11239.000000
mean	1.003004e+06	35.410357	0.420055	2.489634	9453.610553
std	1.716039e+03	12.753866	0.493589	1.114967	5222.355168
min	1.000001e+06	12.000000	0.000000	1.000000	188.000000
25%	1.001492e+06	27.000000	0.000000	2.000000	5443.000000
50%	1.003064e+06	33.000000	0.000000	2.000000	8109.000000
75%	1.004426e+06	43.000000	1.000000	3.000000	12675.000000
max	1.006040e+06	92.000000	1.000000	4.000000	23952.000000

```
In [14]: # use describe() for specific columns
df[['Age', 'Orders', 'Amount']].describe()
```

Out[14]:

	Age	Orders	Amount
count	11239.000000	11239.000000	11239.000000
mean	35.410357	2.489634	9453.610553
std	12.753866	1.114967	5222.355168
min	12.000000	1.000000	188.000000
25%	27.000000	2.000000	5443.000000
50%	33.000000	2.000000	8109.000000
75%	43.000000	3.000000	12675.000000
max	92.000000	4.000000	23952.000000


## Exploratory Data Analysis

## Gender

```
In [15]: # plotting a bar chart for Gender and it's count
```

```
ax = sns.countplot(x = 'Gender',data = df)
```


```
for bars in ax.containers:  
    ax.bar_label(bars)
```

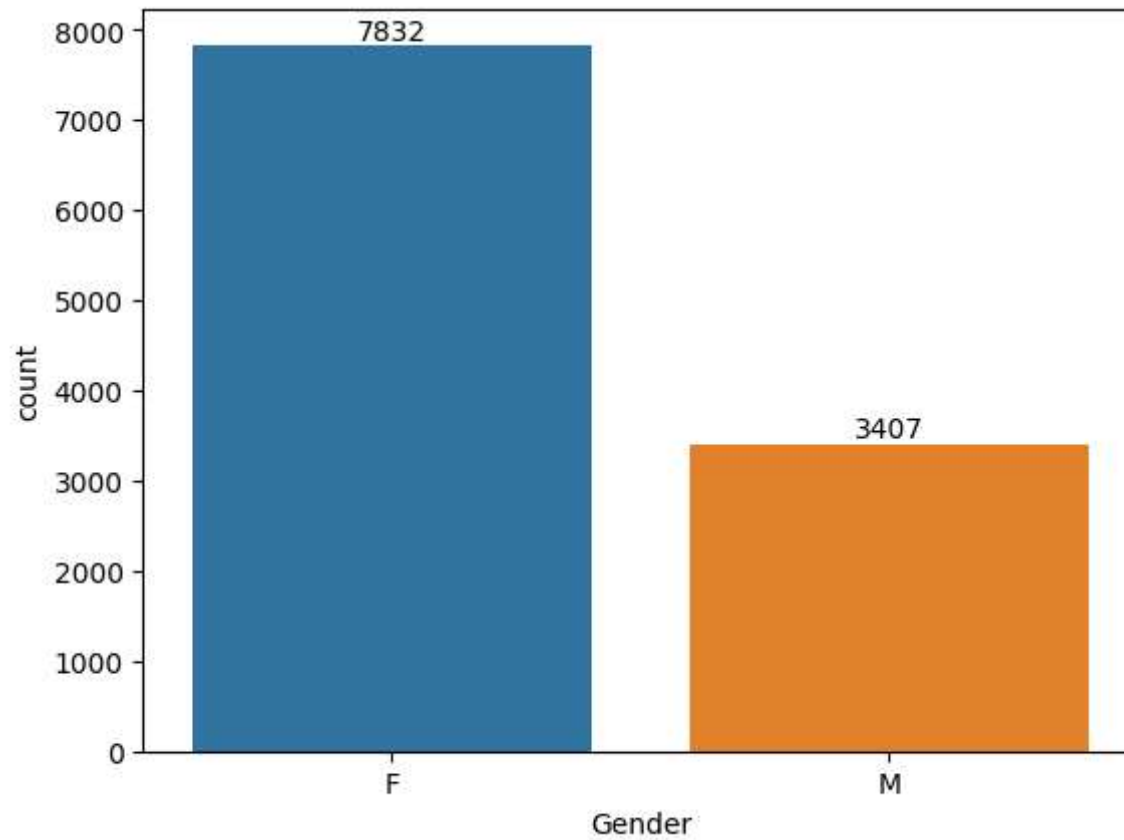

```
In [16]: # plotting a bar chart for gender vs total amount
```

```
sales_gen = df.groupby(['Gender'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)  
sns.barplot(x = 'Gender',y= 'Amount' ,data = sales_gen)
```


```
Out[16]: <Axes: xlabel='Gender', ylabel='Amount'>
```

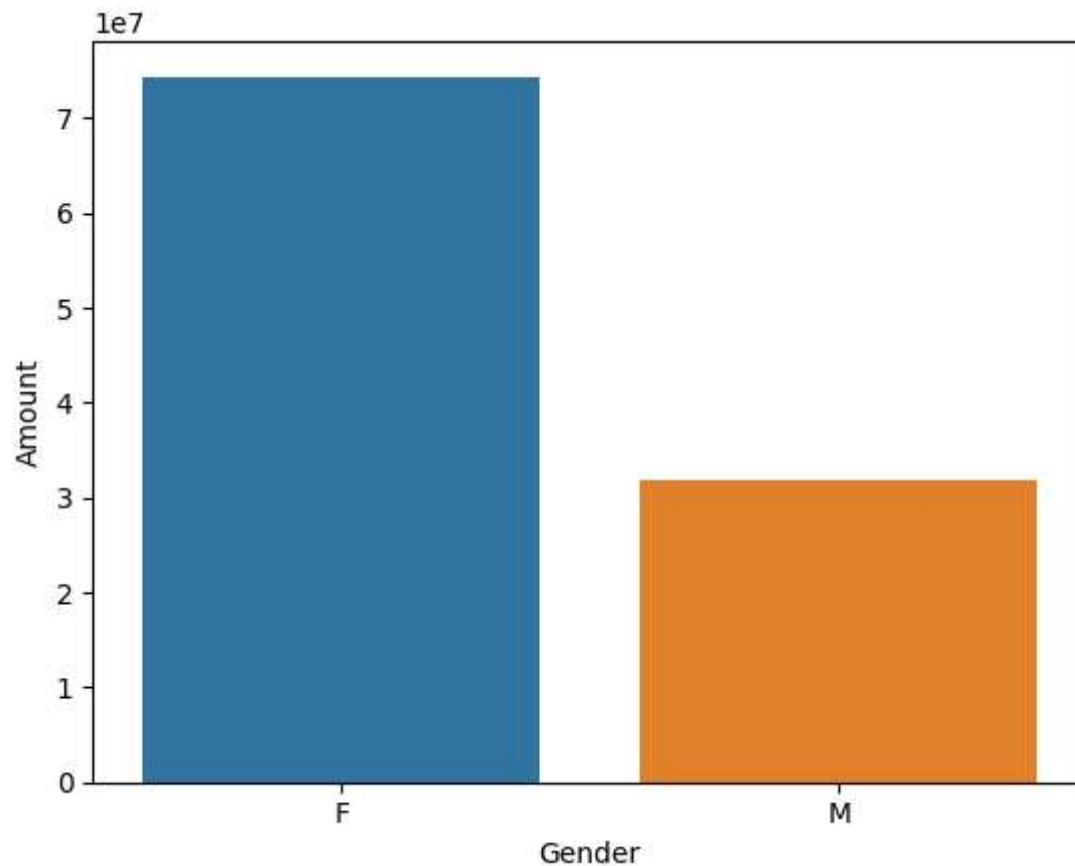

*From above graphs we can see that most of the buyers are females and even the purchasing power of females are greater than men*

## Age

```
In [17]: ax = sns.countplot(data = df, x = 'Age Group', hue = 'Gender')  
  
for bars in ax.containers:  
    ax.bar_label(bars)
```

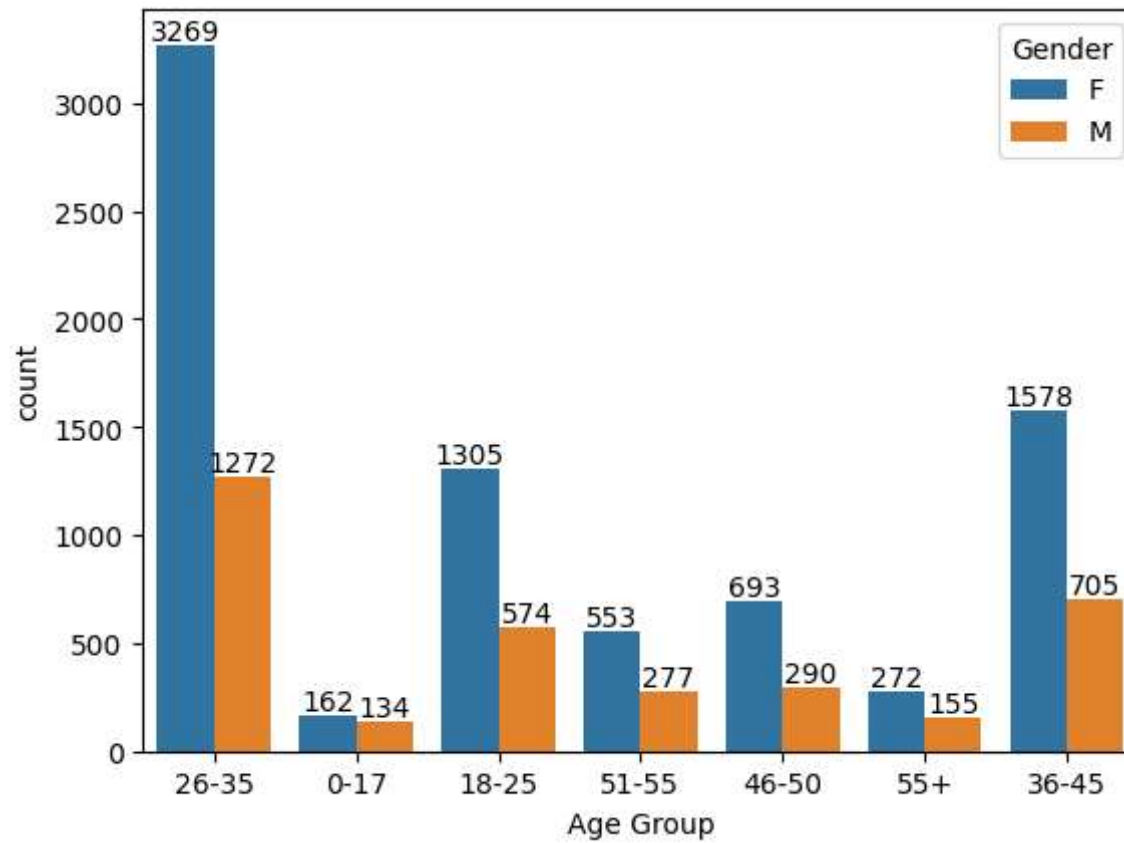




```
In [18]: # Total Amount vs Age Group
sales_age = df.groupby(['Age Group'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)

sns.barplot(x = 'Age Group',y= 'Amount' ,data = sales_age)
```

```
Out[18]: <Axes: xlabel='Age Group', ylabel='Amount'>
```

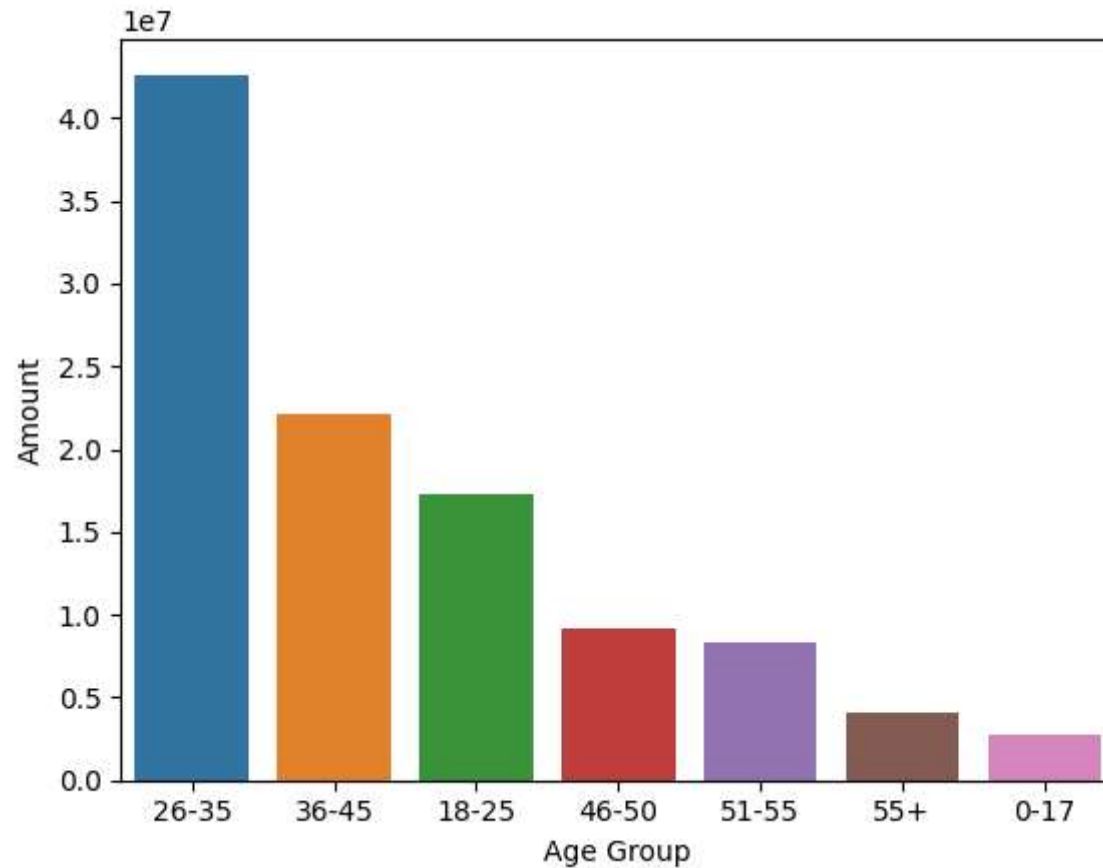

*From above graphs we can see that most of the buyers are of age group between 26-35 yrs female*


## State

In [19]: *# total number of orders from top 10 states*

```
sales_state = df.groupby(['State'], as_index=False)['Orders'].sum().sort_values(by='Orders', ascending=False).head(10)

sns.set(rc={'figure.figsize':(15,5)})
sns.barplot(data = sales_state, x = 'State',y= 'Orders')
```

Out[19]: <Axes: xlabel='State', ylabel='Orders'>

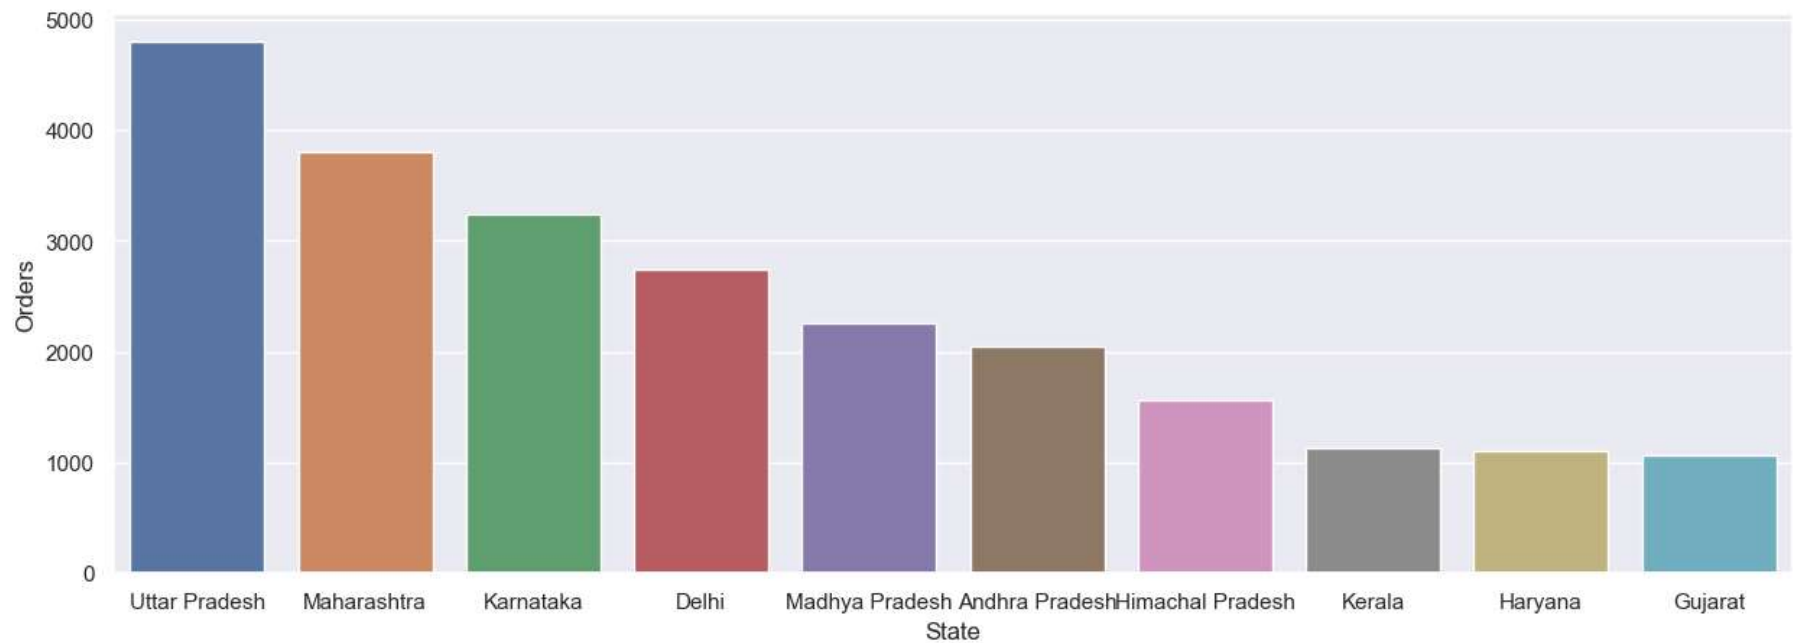


```
In [20]: # total amount/sales from top 10 states
```

```
sales_state = df.groupby(['State'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False).head(10)

sns.set(rc={'figure.figsize':(15,5)})
sns.barplot(data = sales_state, x = 'State',y= 'Amount')
```


```
Out[20]: <Axes: xlabel='State', ylabel='Amount'>
```

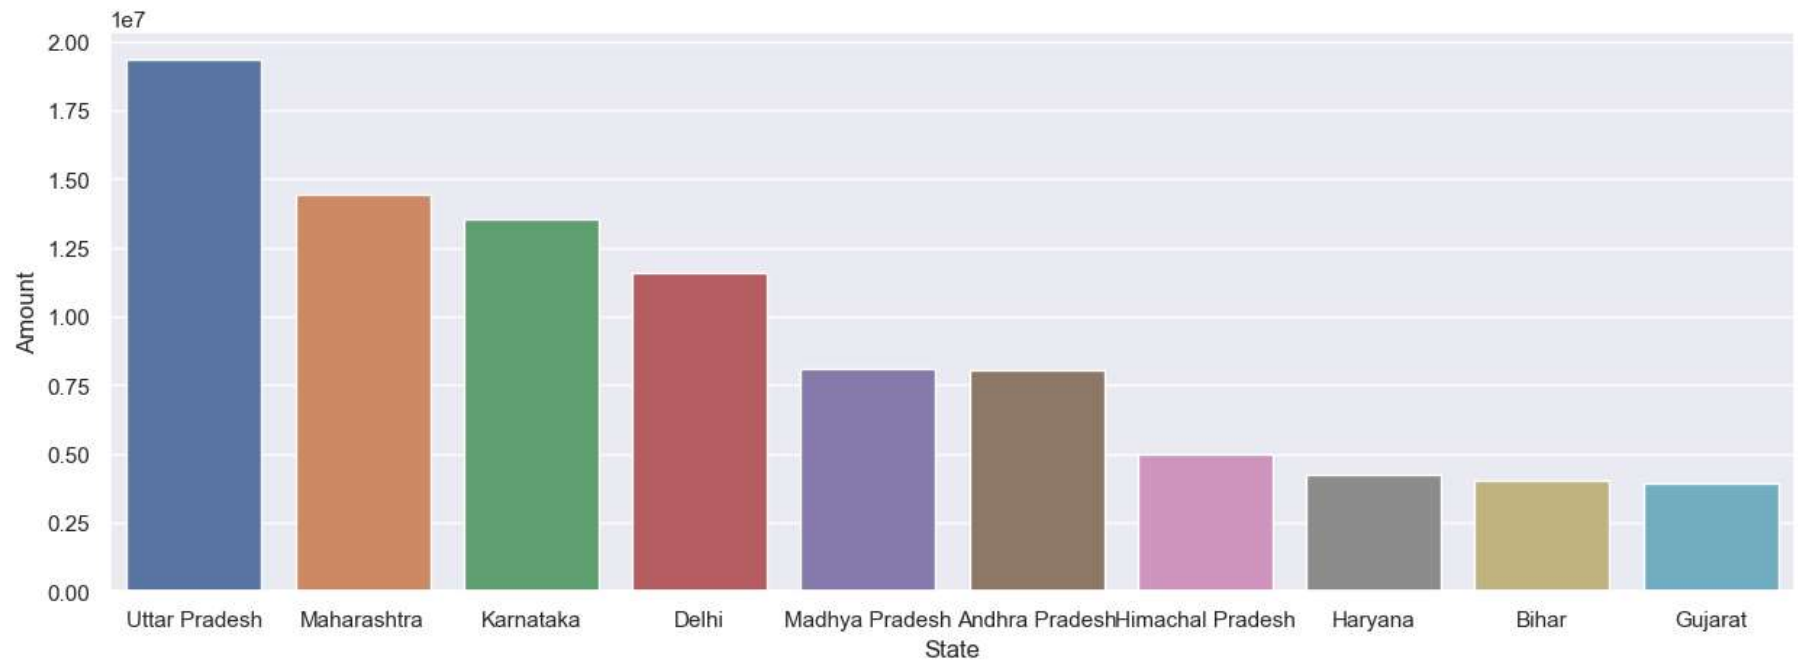

*From above graphs we can see that most of the orders & total sales/amount are from Uttar Pradesh, Maharashtra and Karnataka respectively*

## Marital Status


```
In [21]: ax = sns.countplot(data = df, x = 'Marital_Status')  
  
sns.set(rc={'figure.figsize':(7,5)})  
for bars in ax.containers:  
    ax.bar_label(bars)
```

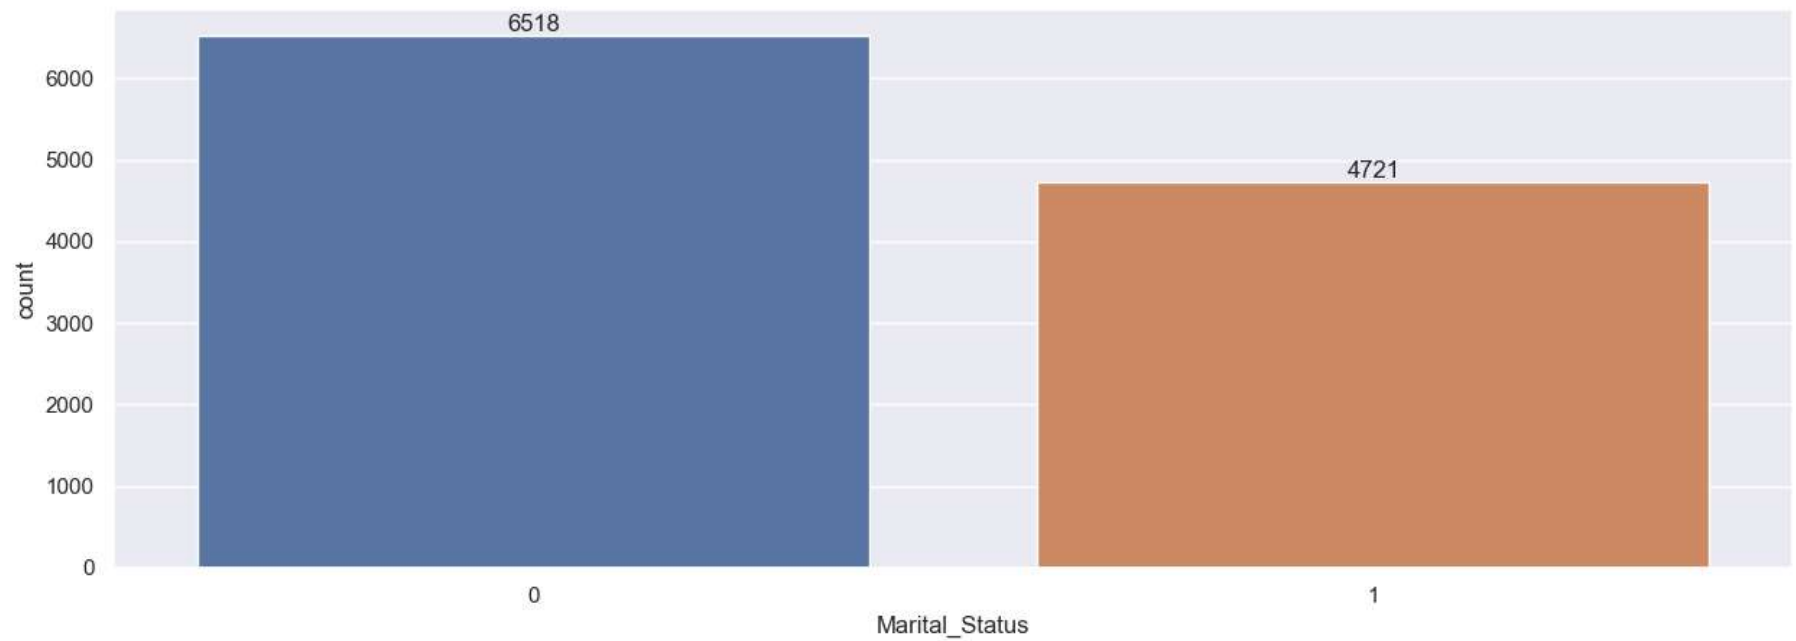

```
In [22]: sales_state = df.groupby(['Marital_Status', 'Gender'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascend

sns.set(rc={'figure.figsize':(6,5)})
sns.barplot(data = sales_state, x = 'Marital_Status',y= 'Amount', hue='Gender')
```

Out[22]: <Axes: xlabel='Marital\_Status', ylabel='Amount'>

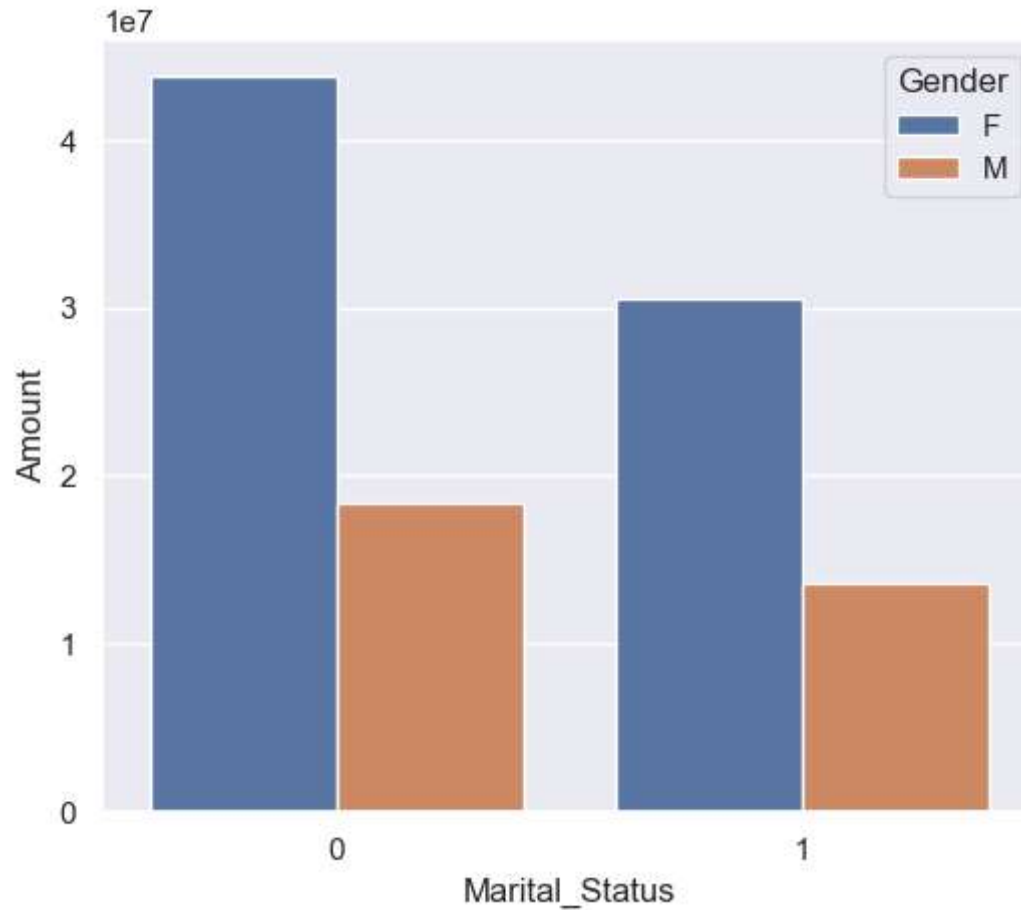


*From above graphs we can see that most of the buyers are married (women) and they have high purchasing power*

## Occupation

```
In [23]: sns.set(rc={'figure.figsize':(20,5)})
ax = sns.countplot(data = df, x = 'Occupation')


for bars in ax.containers:
    ax.bar_label(bars)
```

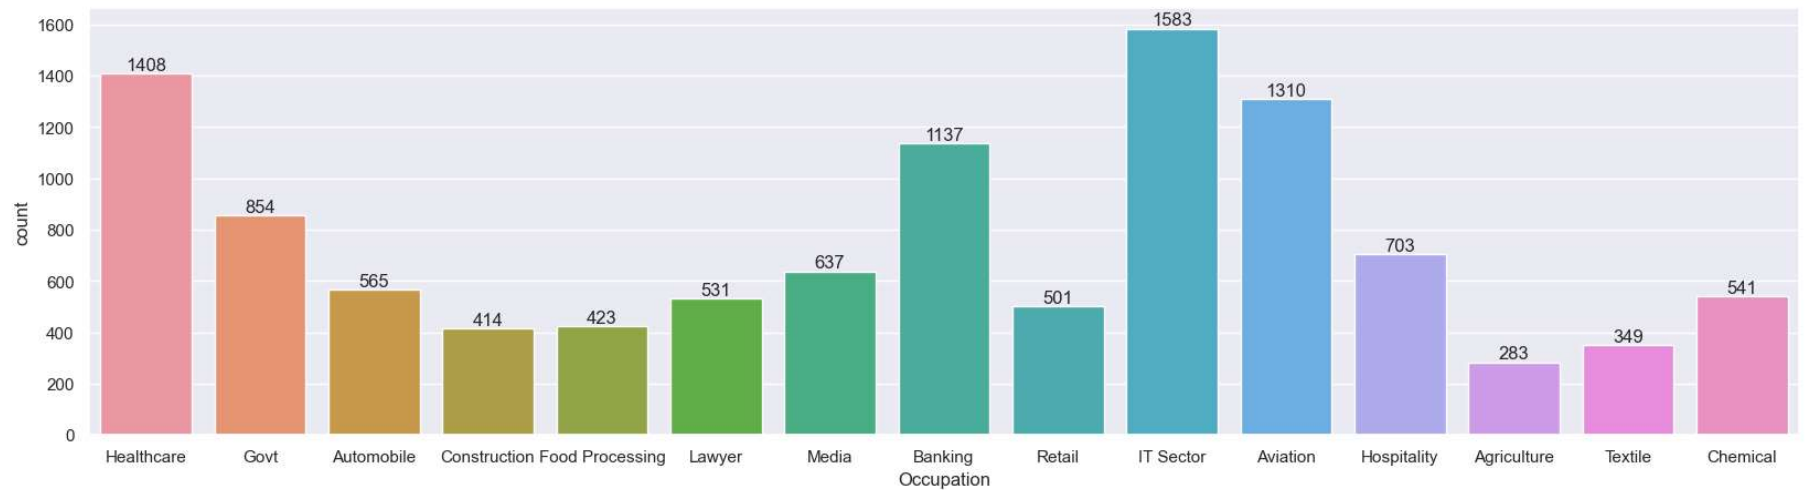

```
In [24]: sales_state = df.groupby(['Occupation'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)

sns.set(rc={'figure.figsize':(20,5)})
sns.barplot(data = sales_state, x = 'Occupation',y= 'Amount')
```

Out[24]: <Axes: xlabel='Occupation', ylabel='Amount'>

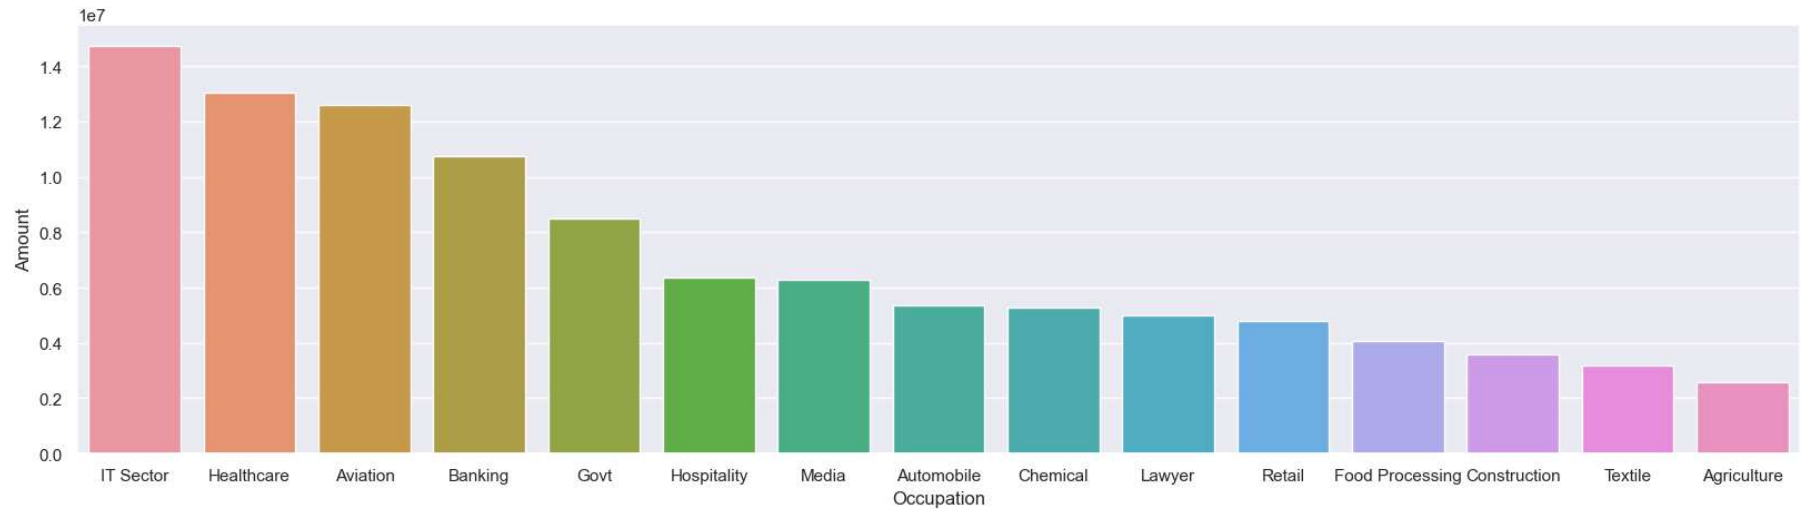


*From above graphs we can see that most of the buyers are working in IT, Healthcare and Aviation sector*

## Product Category

```
In [25]: sns.set(rc={'figure.figsize':(20,5)})
ax = sns.countplot(data = df, x = 'Product_Category')

for bars in ax.containers:
    ax.bar_label(bars)
```

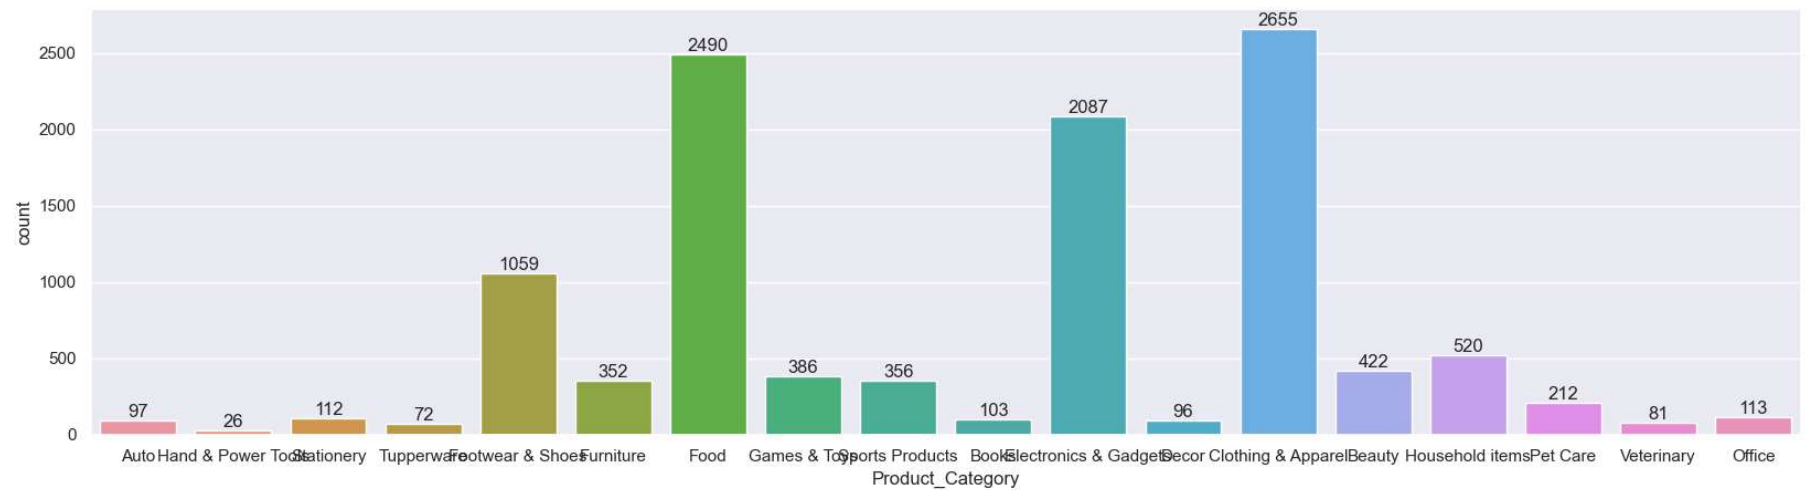




```
In [26]: sales_state = df.groupby(['Product_Category'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)

sns.set(rc={'figure.figsize':(20,5)})
sns.barplot(data = sales_state, x = 'Product_Category',y= 'Amount')
```

Out[26]: <Axes: xlabel='Product\_Category', ylabel='Amount'>

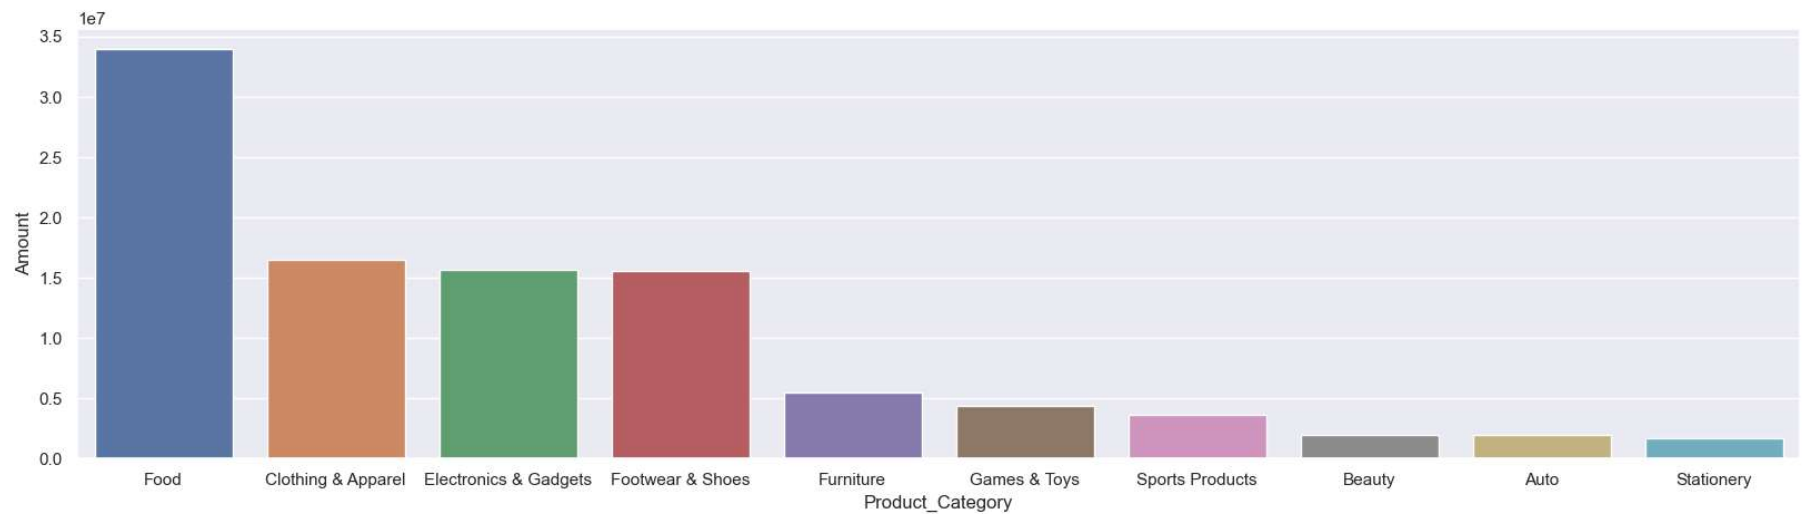


*From above graphs we can see that most of the sold products are from Food, Clothing and Electronics category*

```
In [27]: sales_state = df.groupby(['Product_ID'], as_index=False)['Orders'].sum().sort_values(by='Orders', ascending=False).head(10)

sns.set(rc={'figure.figsize':(20,5)})
sns.barplot(data = sales_state, x = 'Product_ID',y= 'Orders')
```


Out[27]: <Axes: xlabel='Product\_ID', ylabel='Orders'>

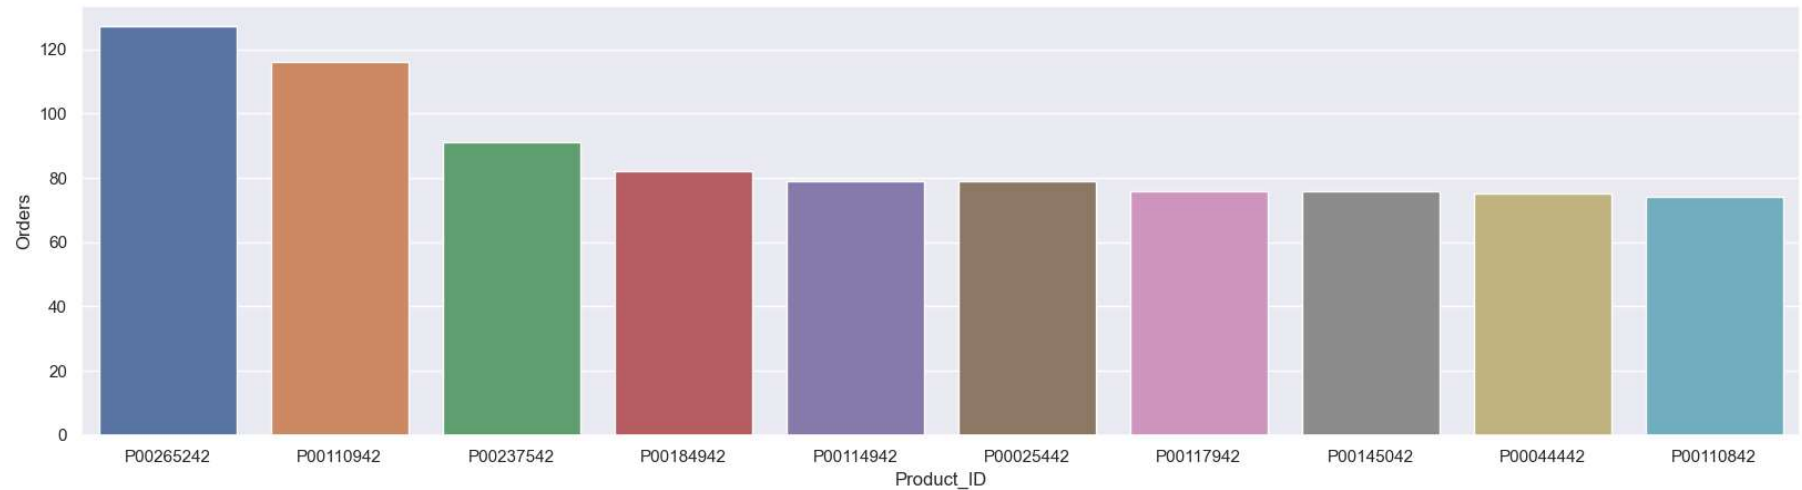

In [28]: *# top 10 most sold products (same thing as above)*

```
fig1, ax1 = plt.subplots(figsize=(12,7))  
df.groupby('Product_ID')['Orders'].sum().nlargest(10).sort_values(ascending=False).plot(kind='bar')
```

Out[28]: <Axes: xlabel='Product\_ID'>

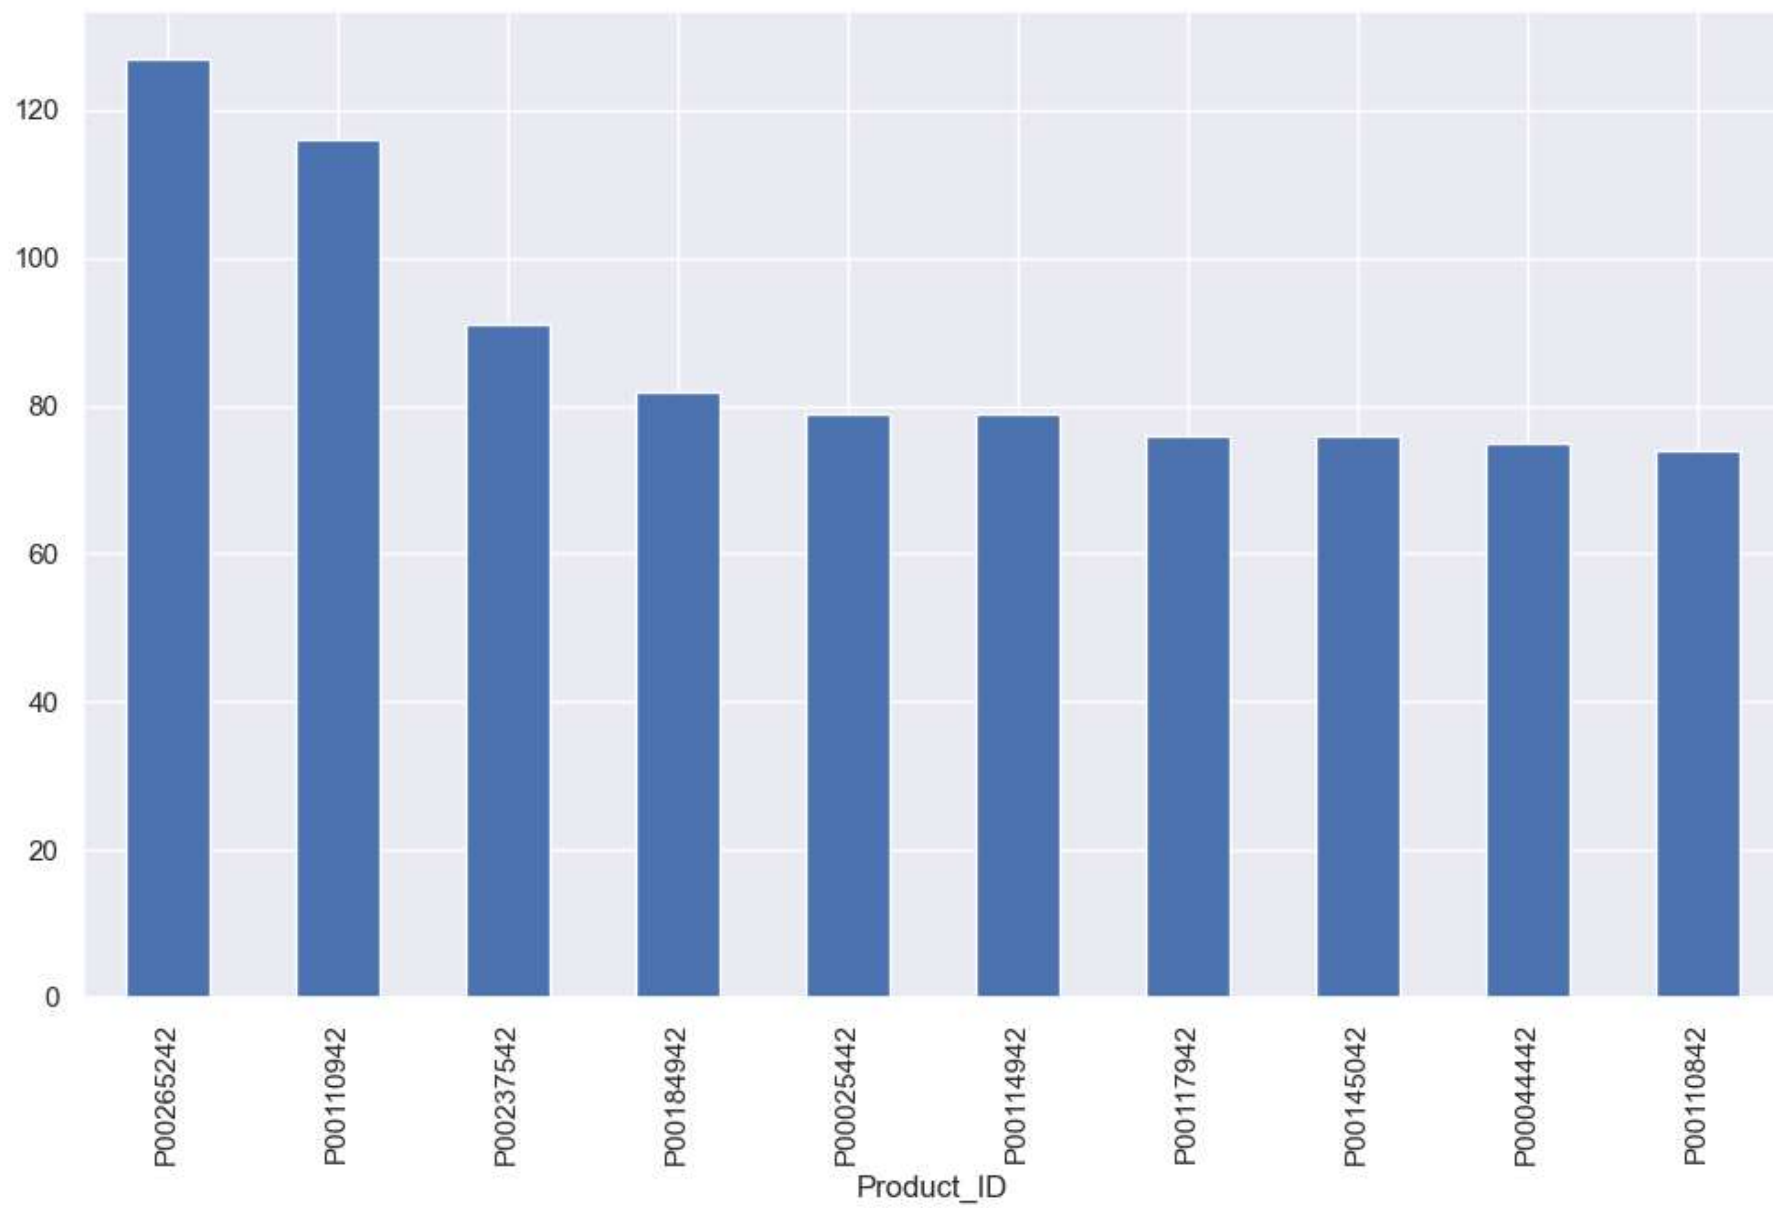

## Conclusion:

Type *Markdown* and LaTeX:  $\alpha^2$

Type *Markdown* and LaTeX:  $\alpha^2$

Thank you!