High-Performance DeepFake Video Classifier

Help people to identify Deepfake videos with 87 % accuracy

Dataset


- Download FaceForensics++ from GitHub
- 1000 real videos and 1000 Deepfake videos
- TV reporters and journalists, YouTube
- Various sexes, ages, and races.

Data Preprocessing

Extract Video Frames and Save to Images

- Capture 1 frame in every 30 frames
- Different facial expressions
- Extract up to 7 frame in a single video
- 7000 images from the Deepfake set
- 7000 images from the Real set

Extract up to 7 frames from 1000 DeepFake videos

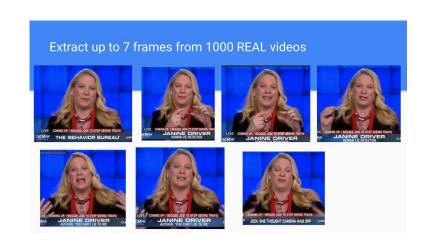

Data Preprocessing

Facial Extraction using pre-trained MTCNN model

- Provide exact pixel positions to keep face boundaries intact
- If MTCNN cannot detect the face, remove the image
- After MTCNN, there are 6984 images in the Deepfake set
- After MTCNN, there are 7000 images in the Real set
- The number of observations: 13984 images



Deepfake set

Extract the faces by using MTCNN





Deepfake





















image_130.jpg



image_107.jpg



image_108.jpg

image_132.jpg



image_133.jpg

















Real set

Extract the faces by using MTCNN













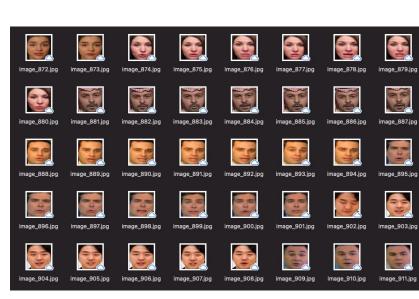

Workflow

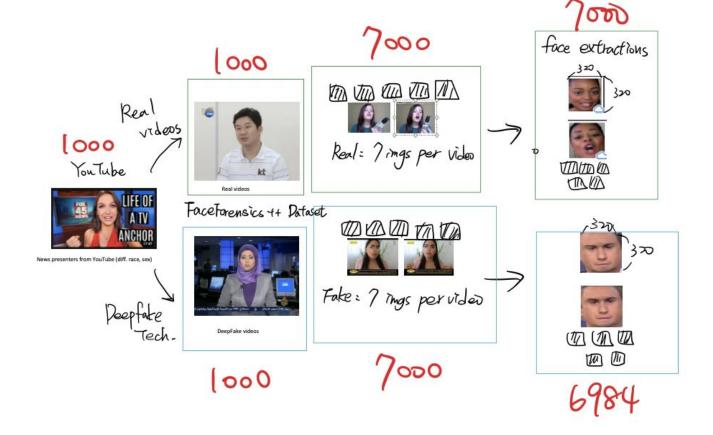


Data Preprocessing

Construct X Features and y Labels

- Flatten 320 x 320 x 3 to 1 x 307,200 as X features
- Label "fake" and "real" as y labels
- Data dimension: 13984 rows and 307201 columns
- Supervised Learning

```
[[array([134, 131, 116, ..., 68, 60, 71], dtype=uint8) 'fake']
[array([133, 130, 115, ..., 71, 59, 71], dtype=uint8) 'fake']
[array([117, 113, 112, ..., 43, 31, 45], dtype=uint8) 'fake']
...
[array([ 33, 20, 66, ..., 188, 155, 172], dtype=uint8) 'real']
[array([ 51, 28, 46, ..., 116, 52, 50], dtype=uint8) 'real']
[array([174, 140, 102, ..., 23, 39, 98], dtype=uint8) 'real']]
```

Data Visualization

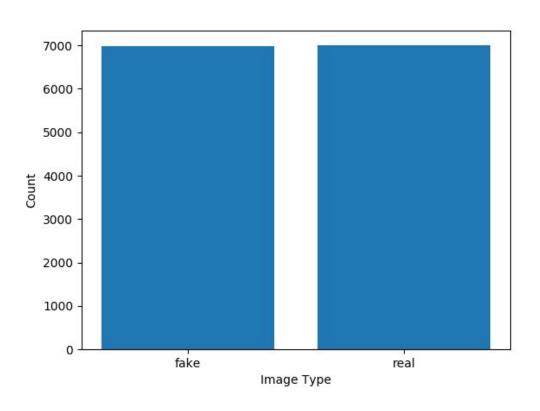


Model Selection

Random Forest Model

- It can handle large features efficiently
- It is not necessary to normalize data points before running the model
- It can reduce computation time

pc: wikimedia.org




Model Optimization

Grid Search and Cross-Validation

- 80 % training, 20 % testing
- Grid search for number of trees: [100, 500, 1000, 2000]
- 5-fold cross validation + bootstrap

Confusion Matrix

- 0 represents fake
- 1 represents real

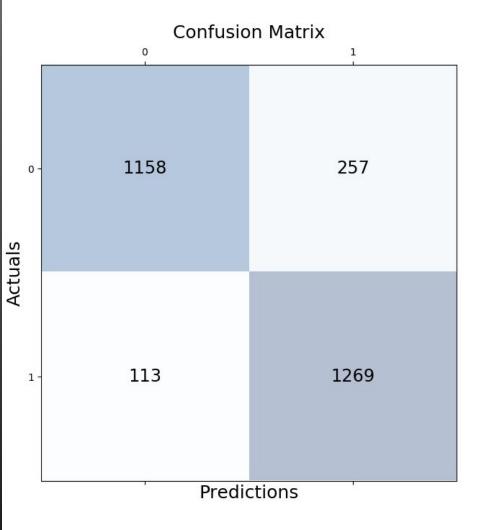

Classification Report

	precision	recall	f1-score	support
fake real	0.91 0.83	0.82 0.92	0.86 0.87	1415 1382
accuracy macro avg weighted avg	0.87 0.87	0.87 0.87	0.87 0.87 0.87	2797 2797 2797

Improvements

- Require more HPC resources
 - HPC would automatically cancel the submission if computation time more than 2 days
 - Add more numbers of grid search and cross-validation
 - Tuning: max_leaf_nodes, min_samples_leaf instead of n_estimators only
- Deep Learning Task
 - Construct a neural network architecture
 - Include activation functions in the hidden layers
 - Grid search to determine the optimal number of epochs and batch size

Computing Environment

- At least Python 3.6.9
- Google Colab free version Python notebook files
- High Performance Computing Python script files
- Source Code: twyunting/Deepfake_Video_Classifier GitHub





References

- 1. Rossler, A., Cozzolino, D., Verdoliva, L., Riess, C., Thies, J., & Nießner, M. (2019). Faceforensics++: Learning to detect manipulated facial images. In *Proceedings of the IEEE/CVF International Conference on Computer Vision* (pp. 1-11).
- 2. Abdali, S., Vasilescu, M. A. O., & Papalexakis, E. E. (2021). Deepfake Representation with Multilinear Regression. *arXiv* preprint arXiv:2108.06702.
- 3. Zhang, K., Zhang, Z., Li, Z., & Qiao, Y. (2016). Joint face detection and alignment using multitask cascaded convolutional networks. *IEEE Signal Processing Letters*, 23(10), 1499-1503.



THANKS!

Any questions?