


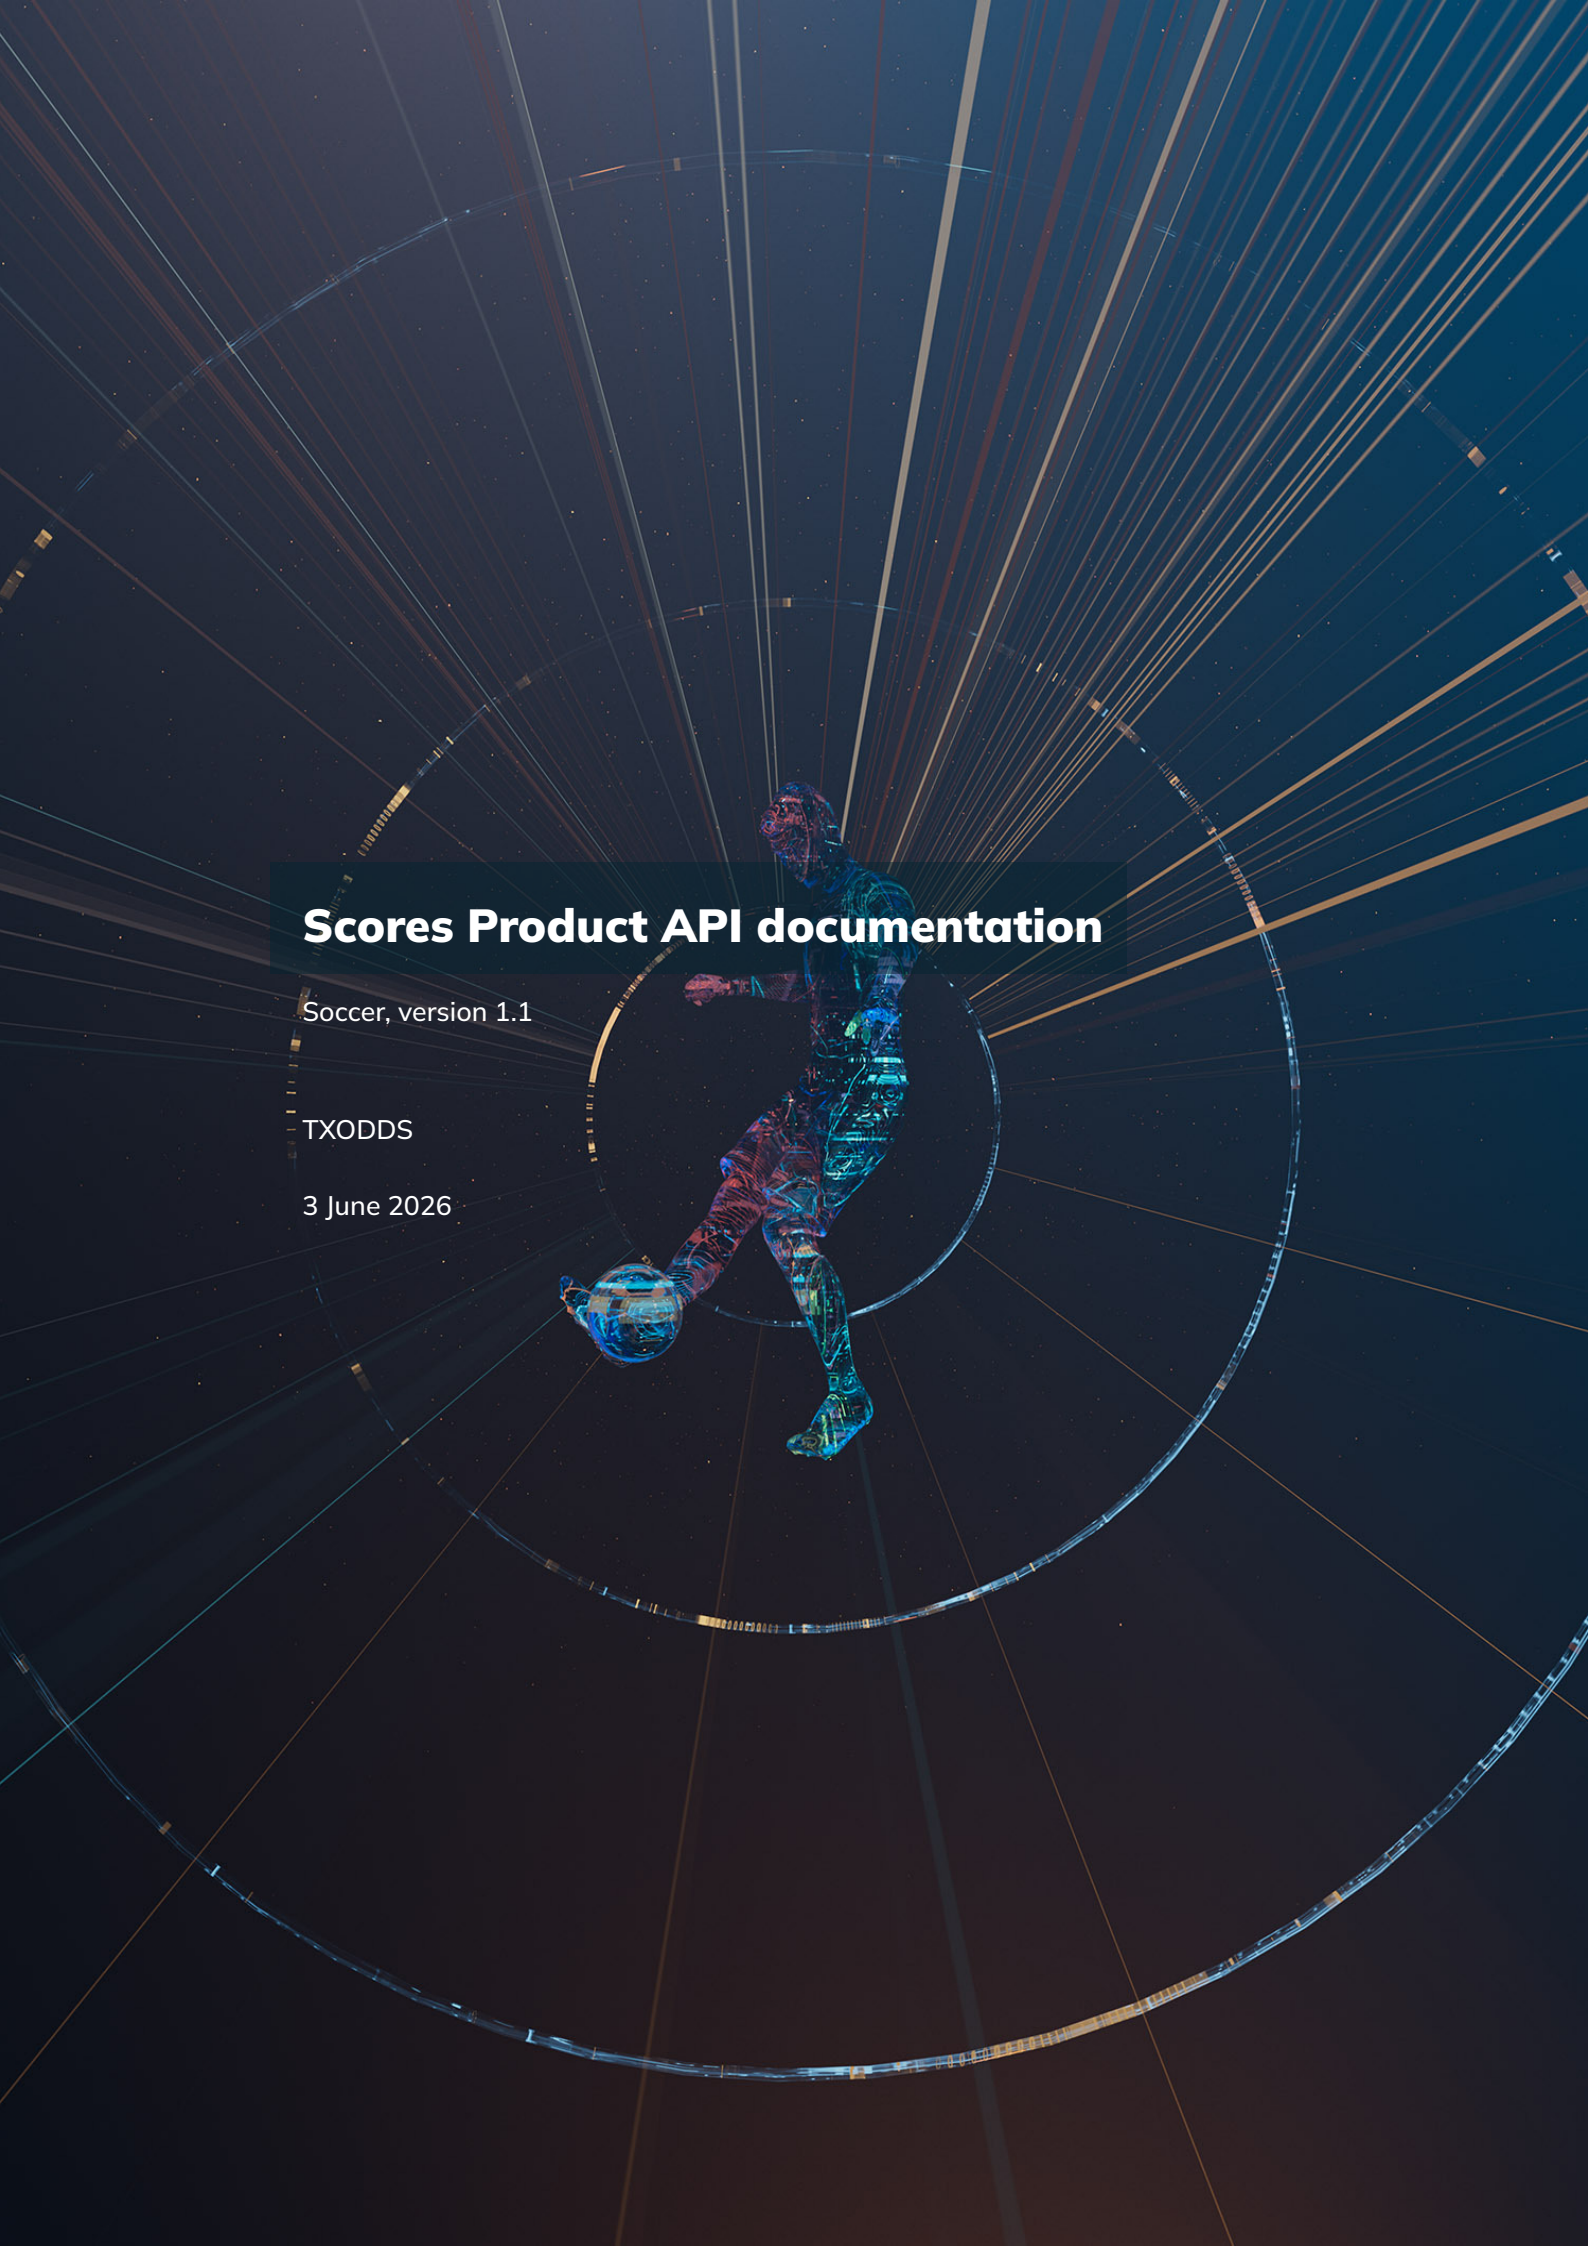

Scores Product API documentation

Soccer, version 1.1

TXODDS

3 June 2026

Contents

Changelog - Version 1.1:	2
Changelog - Version 1.0:	2
Scores Product API documentation	2
Accessing the scores data	2
Messages	3
Common	3
Status Id	3
Amend Additional Time Action	4
Amend Free Kick Action	4
Amend Goal Action	4
Amend Penalty Outcome Action	4
Amend Red Card Action	5
Amend Shot Action	5
Amend Substitution Action	5
Amend Throw In Action	5
Amend VAR End Action	5
Amend Yellow Card Action	6
Clock	6
Kickoff Details	6
Lineup Data	6
Participant State	7
Player Data	7
Player Lineup Data	7
Player on pitch flag	8
Player Statistics	8
Player Statistics	8
Players on Pitch	8
PossibleNeutralEvent	8
PossiblePartyEvent	8
Score	9
Score for Participant in Period	9
Score for Participant in Period	9
Action messages	9
Action Amend	10
Action Discarded	11
Additional Time	11
Attack Possession	12
Clock Adjustment	13
Comment	13
Connected	14
Corner	15
Danger Possession	15
Disconnected	16
Free Kick	16
Goal	17
Goal Kick	18
halftime_finalised	18
High Danger Possession	19
Injury	19
Jersey	20
Kickoff	21
Kickoff Team	21
Lineup	22
Lineups	23
Penalty Attempt	23
Penalty Outcome	24
Penalty Shootout Team	25
Player Stats Adjustment	25
Players on the pitch	26
Players on the pitch Adjustment	26
Players Warming Up	27
Possession	27
Possible	28
Red Card	29
Safe Possession	29

Score Adjustment	30
Shot	30
Standby	31
Status	32
Substitution	32
Suspend	33
Throw In	34
Unreliable Corners	34
Unreliable Yellow Cards	35
VAR	35
VAR End	36
Venue	37
Weather	37
Yellow Card	38

Changelog - Version 1.1:

- Added [FollowsAction](#) field to [Substitution](#) message. Links confirmed substitutions to their originating unconfirmed action.
- Added [Participant](#) field to [Action Amend](#) message. Indicates the team related to the original action being amended.

Changelog - Version 1.0:

- Added [Kickoff](#) field to [Kickoff](#) message.
- Added [SecondYellowCard](#) and [CornerKick](#) enum values to VAR.
- Added [Players on the pitch Adjustment](#) message.
- Added [ManualStatusChange](#) field to [Status](#) message.
- Added [PossessionType](#) field to [Action Discarded](#) message.

Scores Product API documentation

TXODDS Scores is a brand-new product launched in 2024 supplying a first class live scores data offering for Soccer with new sports arriving in the future. The service provides clients with a dedicated endpoint through our Fusion feed to consume real time scores and all important play by play game updates as soon as they happen on the field. A wide range of in-play game actions are covered with both team and player level data included. All updates are generated directly from venues & streams and sent directly to the Scores Fusion feed with high accuracy and the extremely low latency.

Utilising our innovative capture software, specialist trained Scouting network and supporting operational teams TXODDS Scores offers a high performance and rich in-play data feed. Please find more information below regarding the Scores API and a detailed guide to our Soccer data.

Accessing the scores data

Scores Product data is available for clients as an extension to the TXODDS Fusion subscription. To receive the data, the following endpoints are in use:

1. The Fixtures API endpoint, that indicates which fixtures are going to be covered with scores data;
2. the Scores API endpoint, that provides real-time access to scores information.

Please refer to TXAPI FUSION FEED User Guide, version 1.20:

- Fixtures Usage - p.15;
- Fixtures Message - p.51-53;
- Scores Usage - p.17-18;
- Scores Message - p.58-60.

In summary, the fixture messages are annotated with the following data, available to subscribe as [ExtraFields](#):

Field	Default	Type	Example	Description
CoverageStatus	N	string	"Approved"	The status of the Scores Data fixture coverage: Not Approved , Approved , Cancelled
CoverageType	N	string	"Venue"	The Scores Data coverage that will be available if approved: Venue , TV/Stream
CoverageSecondaryData	N	boolean	true	Is additional player data available: true , false , null . e.g. for a goal - scorer, assist.

The scores data is available at the [/scores](#) endpoint.

Optional scores endpoint parameters:

- [Ts](#) (timestamp);
- [FixtureId](#), allows multiple values, separated by a comma e.g. [FixtureId=x,y,z](#).

To get live updates for any fixture that has Score Data available: [/scores](#)

To get the history and live updates for specific fixtures that have Score Data available: [/scores?Ts=0&FixtureId=123456789,234567890](#)

NOTE: Check the [/fixtures](#) endpoint [ScoresCaptureTracking=True](#) and the [ExtraFields](#) parameter values [CoverageType](#), [CoverageStatus](#), and [CoverageSecondaryData](#) to see if Scores Data coverage for the fixture might be available.

NOTE: There is a slight difference in the response when requesting Full Context using [Ts=0](#). All other endpoints will provide the current state e.g. the [odds](#) endpoint will return the current state of all available offers. The [scores](#) endpoint will however provide a history of the messages rather than current state, but otherwise the [Ts](#) parameter works the same, messages greater than or equal to the timestamp will be returned.

Example of a Fusion Scores message in JSON format:

```
1  {
2    "FixtureInfo": {
3      "GameState": "scheduled",
4      "StartTime": "2024-06-08T21:00:00Z",
5      "IsTeam": true,
6      "FixtureGroupId": 10074357,
7      "FixtureGroup": "CL > Playoffs",
8      "CompetitionId": 500005,
9      "Competition": "Champions League",
10     "CountryId": 459,
11     "Country": "EU",
12     "SportId": 6,
13     "Sport": "soccer",
14     "Participant1IsHome": true,
15     "Participant2Id": 38298,
16     "Participant2": "Liverpool",
17     "Participant1Id": 4433,
18     "Participant1": "F.C Barcelona",
19     "FixtureId": 14790158
20   },
21   "Update": {
22     "Action": "kickoff",
23     "StatusId": 2,
24     "Data": {
25       "Participant": 1
26     },
27     "Confirmed": true,
28     "Clock": {
29       "Running": false,
30       "Seconds": 756
31     },
32     "FixtureId": 14790158,
33     "GlobalSeq": 262,
34     "Id": 241,
35     "Ts": 1718033066851,
36     "ServerId": "3e5e4790-6260-4dd3-858e-dd9c100c122e",
37     "Seq": 245
38   }
39 }
```

Please refer to the Fusion feed documentation for [FixtureInfo](#) description. The following paragraphs in this document describe the different messages that are sent in the [Update](#) field - see [Action messages](#).

Messages

Common

The following sections describe the format of fields that can appear in all Fixture Actions, for reference.

Status Id

Most of the events in the game have a [StatusId](#) associated. This ID represents the current phase of the game. Some events refer also to the [StatusName](#). All possible values, along with their meaning, are described in the table below.

Id	Name	Game Phase	Description
1	NS	Not Started	Status before the match is started
2	H1	1st Half	Match in play during 1st half
3	HT	Half Time	Half-time of the match
4	H2	2nd Half	Match in play during 2nd half

Id	Name	Game Phase	Description
5	F	Finished (Full-Time)	Match ends after the 2nd half of regular time
6	WET	Waiting for Extra Time	Break after second half before the start of the first extra time half
7	ET1	1st Half Extra Time	The first half of Extra Time
8	HTET	HT Extra Time	Half-time in Extra Time
9	ET2	2nd Half Extra Time	The second half of Extra Time
10	FET	Finished (Full-Time) After Extra Time	Match ends after the 2nd half of Extra Time
11	WPE	Waiting for Penalty Shootout	Break after Extra Time before the start of a Penalty Shootout
12	PE	Penalty Shootout	Penalty shootout in progress
13	FPE	Finished After Penalty Shootout	Game ends after Penalty Shootout
14	I	Interrupted	The game is officially interrupted
15	A	Abandoned	The game is officially abandoned
16	C	Cancelled	The game is officially cancelled
17	TXCC	TX Coverage Cancelled	TX cancelled coverage of the event
18	TXCS	TX Coverage Suspended	TX suspended coverage of the event

Amend Additional Time Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	See object details
Minutes	no	number, null	Minutes added to the current period.	null, 1, 2, 6

Amend Free Kick Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	See object details
FreeKickType	no	enum (see examples)	Type of Free Kick.	null, "Safe", "Attack", "Danger", "HighDanger", "Offside"

Amend Goal Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	See object details
GoalType	no	enum (see examples)	Type of goal.	null, "Shot", "Head", "Own", "Other"
PlayerId	no	number, null	External Id of the player that scored, if applicable.	null, 3290005, 1290003, 5020305

Amend Penalty Outcome Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	See object details
Outcome	no	enum (see examples)	Outcome of the penalty.	null, "Scored", "Missed", "Retake"

Property	Required	Type	Description	Examples
PlayerId	no	number, null	External Id of the player that took the penalty, if applicable.	<i>null, 3290005, 1290003, 5020305</i>

Amend Red Card Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	<i>See object details</i>
PlayerId	no	number, null	External Id of the player that received the card, if applicable.	<i>null, 3290005, 1290003, 5020305</i>
Type	no	enum (see examples)	Type of red card.	<i>null, "StraightRed", "SecondYellow"</i>

Amend Shot Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	<i>See object details</i>
Outcome	no	enum (see examples)	Outcome of the shot.	<i>null, "OnTarget", "OffTarget", "Woodwork", "Blocked"</i>

Amend Substitution Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	<i>See object details</i>
PlayerInId	no	number, null	External Id of the player that enters the field, if applicable.	<i>null, 3290005, 1290003, 5020305</i>
PlayerOutId	no	number, null	External Id of the player that leaves the field, if applicable.	<i>null, 3290005, 1290003, 5020305</i>

Amend Throw In Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	<i>See object details</i>
ThrowInType	no	enum (see examples)	Type of Throw In.	<i>null, "Safe", "Attack", "Danger"</i>

Amend VAR End Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	<i>See object details</i>
Outcome	no	enum (see examples)	Outcome of the VAR.	<i>null, "Stands", "Overturned"</i>

Amend Yellow Card Action

Amend specific info

Property	Required	Type	Description	Examples
Clock	yes	Clock	See Clock	See object details
PlayerId	no	number, null	External Id of the player that received the card, if applicable.	null, 3290005, 1290003, 5020305

Clock

Game clock

Property	Required	Type	Description	Examples
Running	yes	boolean	Is the clock currently running?	false, true
Seconds	yes	number	Time in seconds left in the current period. At the start it is the full time for the period (for example, 45 minutes would be 2700 seconds). The value decreases with every new action until the end of the period.	0, 302, 400, 734, 900

Kickoff Details

Kick-off information

Property	Required	Type	Description	Examples
Team	yes	number, null	Team that does the kick-off. Referenced participant number (Participant1 vs Participant2). Home/away mapping is provided by the Participant1IsHome flag on the fixture.	null, 1, 2

Lineup Data

Lineup information for a team

Property	Required	Type	Description	Examples
entityStatus	no	string, null	Team status.	See object details
entityVersion	yes	number	Team information version.	0, 5, 8
gender	yes	enum (see examples)	Information about the gender of the team (which gendered competitions it is playing in).	"female", "male"
id	yes	string	Team UUID.	"227264fb-4132-4e49-9121-3165c753002e", "443653c4-32ae-401e-b5ef-97db6fa3ed86"
lineups	yes	Array< PlayerLineupData >	Player lineup information.	See object details
normativeId	yes	number	Team normative Id.	4268, 4707
preferredName	yes	string	Team name.	"Real Madrid", "Barcelona"
sportId	yes	string	Sport Id.	"00000000-0000-0006-0000-000000000003", "00000000-0000-0006-0000-000000000004"
updateDateMillis	yes	number	Team update timestamp.	1732878222979, 1732878726834

Participant State

Information about a team during this game

Property	Required	Type	Description	Examples
PossibleEvent	no	PossiblePartyEvent	Possible events in the game for this team. See PossiblePartyEvent	See object details

Player Data

Data about a player in a team

Property	Required	Type	Description	Examples
country	no	string, null	Player country of origin.	null, "Dominican Republic", "England", "Spain", "USA"
dateOfBirth	no	string, null	Player date of birth.	null, "1987-02-20", "1999-12-03", "2003-06-11"
entityStatus	no	string, null	Player status.	See object details
entityVersion	yes	number	Player information version.	0, 5, 8
gender	yes	enum (see examples)	Gender of the player.	"female", "male"
id	yes	string	Player UUID.	"227264fb-4132-4e49-9121-3165c753002e", "443653c4-32ae-401e-b5ef-97db6fa3ed86"
normativeId	yes	number	Player normative Id.	1752, 4268, 4707
preferredName	yes	string	Player name (Last Name, First Name) in normalised Latin chars.	"Baker, Brandon", "Gallian, John", "Kornet, Luke"
sportId	yes	string	Sport Id.	"00000000-0000-0006-0000-000000000003", "00000000-0000-0006-0000-000000000004"
team	no	string, null	Player team Id.	null, "00000000-0000-0006-0000-000000000003", "00000000-0000-0006-0000-000000000004"
updateDateMillis	yes	number	Player update timestamp.	1732878222979, 1732878726834

Player Lineup Data

Lineup information for a team

Property	Required	Type	Description	Examples
fixturePlayerId	no	number	Player Id in the fixture, used to reference a player in events.	1187, 1975, 5629
player	no	PlayerData	Player information. See PlayerData	See object details
positionId	yes	number	Position Id in the fixture.	11, 34, 37
rosterNumber	no	string, null	Roster number.	null, "0", "00", "09", "9", "18"
starter	no	boolean	The player is part of the starting team.	true, false
statusId	yes	number	Player Status.	3, 7
unitId	yes	number	Unit Id.	2, 5

Property	Required	Type	Description	Examples
----------	----------	------	-------------	----------

Player on pitch flag

Numeric value. It is 1 if the corresponding player is on the pitch, -1 if they are not

Player Statistics

Player statistics for both participants

Property	Required	Type	Description	Examples
Participant1	yes	Map<number, PlayerStats >	Player statistics for the referenced player. See PlayerStats	<i>See object details</i>
Participant2	yes	Map<number, PlayerStats >	Player statistics for the referenced player. See PlayerStats	<i>See object details</i>

Player Statistics

Player statistics, usually indexed by the player id

Property	Required	Type	Description	Examples
goals	yes	number	Goals scored.	<i>0, 1, 3, 5</i>
ownGoals	yes	number	Own goals scored.	<i>0, 1, 3, 5</i>
penaltyAttempts	yes	number	Penalties taken.	<i>0, 1, 3, 5</i>
penaltyGoals	yes	number	Penalties scored.	<i>0, 1, 3, 5</i>
redCards	yes	number	Red cards received.	<i>0, 1, 2</i>
shots	yes	number	Shots attempted.	<i>0, 1, 3, 5</i>
yellowCards	yes	number	Yellow cards received.	<i>0, 1, 2</i>

Players on Pitch

Players on pitch for both participants

Property	Required	Type	Description	Examples
Participant1	yes	Map<number, PlayerOnPitchFlag >	Flag is 1 if player is on pitch, -1 if not. See PlayerOnPitchFlag	<i>See object details</i>
Participant2	yes	Map<number, PlayerOnPitchFlag >	Flag is 1 if player is on pitch, -1 if not. See PlayerOnPitchFlag	<i>See object details</i>

PossibleNeutralEvent

Possible game event

Property	Required	Type	Description	Examples
RedCard	yes	boolean	A possible red card in play.	<i>false, true</i>
VAR	yes	boolean	A possible VAR review in play.	<i>false, true</i>
YellowCard	yes	boolean	A possible yellow card in play.	<i>false, true</i>

PossiblePartyEvent

Possible event for a participant

Property	Required	Type	Description	Examples
Corner	yes	boolean	A possible corner.	<i>false, true</i>
Goal	yes	boolean	A possible goal.	<i>false, true</i>
Penalty	yes	boolean	A possible penalty.	<i>false, true</i>

Score

Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line

Property	Required	Type	Description	Examples
Participant1	yes	ScoreParticipant	Score for participant 1. Home/away mapping is provided by the Participant1IsHome flag on the fixture. See ScoreParticipant	<i>See object details</i>
Participant2	yes	ScoreParticipant	Score for participant 2. Home/away mapping is provided by the Participant1IsHome flag on the fixture. See ScoreParticipant	<i>See object details</i>

Score for Participant in Period

Score information for a participant

Property	Required	Type	Description	Examples
ET1	no	ScoreParticipantPeriod	Score on 1st half of extra time. See ScoreParticipantPeriod	<i>See object details</i>
ET2	no	ScoreParticipantPeriod	Score on 2nd half of extra time. See ScoreParticipantPeriod	<i>See object details</i>
ETTotal	no	ScoreParticipantPeriod	Total extra time score: the sum of scores in all extra time periods. See ScoreParticipantPeriod	<i>See object details</i>
H1	no	ScoreParticipantPeriod	Score on 1st half. See ScoreParticipantPeriod	<i>See object details</i>
H2	no	ScoreParticipantPeriod	Score on 2nd half. See ScoreParticipantPeriod	<i>See object details</i>
HT	no	ScoreParticipantPeriod	Score up to halftime. See ScoreParticipantPeriod	<i>See object details</i>
PE	no	ScoreParticipantPeriod	Score on penalties. See ScoreParticipantPeriod	<i>See object details</i>
Total	no	ScoreParticipantPeriod	Total score: sum of all periods and extra time periods. See ScoreParticipantPeriod	<i>See object details</i>

Score for Participant in Period

Score information for a participant in a given period

Property	Required	Type	Description	Examples
Corners	yes	number	Total corners taken.	<i>0, 1, 4, 12</i>
Goals	yes	number	Total goals scored.	<i>0, 1, 3, 5</i>
RedCards	yes	number	Total red cards received.	<i>0, 1, 2, 3</i>
YellowCards	yes	number	Total yellow cards received.	<i>0, 2, 3, 5</i>

Action messages

The following sections describe the format of all Fixture Actions. Each message represent one action in the game.

Fields that indicate game status, like [Score](#), will appear if the action modifies the value. If it does not, the value may not be returned, for brevity.

Action Amend

Amends an action that was previously sent. The Id field should match the Id of the action to amend. The Action name should match (same action type). Previous is the previous payload sent for the action, so they payload can vary depending on the action being amended. New contains the new values for that action, to replace the previous one. The fields amended are usually fields like PlayerId or Timestamp, that shouldn't have an impact on the game state itself (no changes to score, etc). Important note: the status id associated to this action will match the status id of the action being amended. For example, an amend during Q2 of an action that happened in Q1, will display Q1 in the status id. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"action_amend"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Action	yes	string	Name of the action to amend. It has to match a previously sent action.	See object details
Data.Id	yes	number	Id of the action to amend. It has to match a previously sent action.	18, 68, 87, 10, 69
Data.New	yes	SoccerThrowIn or SoccerFreeKick or SoccerShot or SoccerGoal or SoccerPenaltyOutcome or SoccerYellowCard or SoccerRedCard or SoccerVAREnd or SoccerAdditionalTime or SoccerSubstitution	New values for the action. The contents will be the same as the Data field for the action amended. It will also embed the Clock value of the updated action message.	See object details
Data.Previous	yes	SoccerThrowIn or SoccerFreeKick or SoccerShot or SoccerGoal or SoccerPenaltyOutcome or SoccerYellowCard or SoccerRedCard or SoccerVAREnd or SoccerAdditionalTime or SoccerSubstitution	Old values for the action. The contents will be the same as the Data field for the action amended. It will also embed the Clock value of the previous action message.	See object details
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
FollowsAction	no	number	Action ID of a previous action that originated this action. It is used to indicate actions that may need to be discarded as a unit.	35, 17, 56, 67, 98
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	no	number, null	The team related to the original action being amended. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	null, 1, 2
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12

Property	Required	Type	Description	Examples
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Action Discarded

Discards previously added action. The action discarded is the action whose Id matches the Id field provided. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action type.	"action_discarded"
Clock	no	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Parti1State	yes	PartiState	State for the Participant1 . Home/away mapping is provided by the Participant1IsHome flag on the fixture. See PartiState	See object details
Parti2State	yes	PartiState	State for the Participant2 . Home/away mapping is provided by the Participant1IsHome flag on the fixture. See PartiState	See object details
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Possession	yes	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
PossibleEvent	no	PossibleNeutralEvent	Possible events active in the game. They affect both teams. See PossibleNeutralEvent	See object details
Score	yes	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Additional Time

Indicates how much additional time is added to the current period, at the end of the regular minutes allocated for the period. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"additional_time"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Minutes	no	number, null	Minutes added to the current period.	null, 1, 3, 10
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Attack Possession

The participant has the ball in the attacking area. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"attack_possession"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that has possession of the ball.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the ParticipantIsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	"SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"

Property	Required	Type	Description	Examples
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>

Clock Adjustment

Amends the clock value with corrected seconds and whether it is running or not. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	<i>"clock_adjustment"</i>
Clock	yes	Clock	Game clock. See Clock	<i>See object details</i>
ConnectionId	yes	number	Internal ID of the connection.	<i>12, 13, 9, 1, 18</i>
Data	yes	object	Action specific info.	<i>See object details</i>
Data.Clock	no	Clock	The clock value to use. See Clock	<i>See object details</i>
FixtureId	yes	number	The normative Id of the fixture.	<i>10461989, 10190463, 10260031, 10026403, 10471436</i>
FollowsAction	no	number	Action ID of a previous action that originated this action. It is used to indicate actions that may need to be discarded as a unit.	<i>35, 17, 56, 67, 98</i>
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	<i>36, 18, 57, 68, 99</i>
Seq	yes	number	Update sequence number for a fixture.	<i>52, 60, 74, 40, 48</i>
StatusId	yes	number	The ID for the current game period. See StatusId .	<i>2, 4, 7, 9, 12</i>
Ts	yes	number	Timestamp of the update.	<i>1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689</i>
Type	yes	enum (see examples)	Sport Type.	<i>"Soccer"</i>
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>

Comment

A message sent by the reporter. Contains pre-made messages or custom text. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	<i>"comment"</i>
ConnectionId	yes	number	Internal ID of the connection.	<i>12, 13, 9, 1, 18</i>
Data	yes	object	Action specific info.	<i>See object details</i>
Data.Active	no	boolean, null	If true, the current message information is still valid. If false, the message is no longer valid and should be ignored.	<i>null, false, true</i>
Data.Severity	no	enum (see examples)	Indicates how important is the comment. An action_invalid comment means a previous action has been discarded, but that action was too far in the past, and the state (scores) have not been adjusted. It is likely, although not mandatory, that a score adjustment may follow soon. Warnings are to be paid more attention than Info, as they may indicate issues with the game.	<i>null, "info", "warning", "action_invalid"</i>

Property	Required	Type	Description	Examples
Data.Text	no	string, null	The message sent. Usually one of the enum below, but could be free text in some cases.	<i>null</i> , "Action has been marked as invalid", "The game stopped due to a serious injury", "The game start is delayed", "The game interrupted", "Water-drinking break", "Home Team Coach Red Card", "Away Team Coach Red Card"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null</i> , <i>false</i> , <i>true</i>

Connected

A connection has been established. The field `ConnectionType` identifies the type of user that connected.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"connected"
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false</i> , <i>true</i>
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
ConnectionServerId	yes	string	Internal Id of the server .	"507ad907-9f35-458f-8a7b-982c62ce5292", "44a5ecab-49b5-4b21-8712-e27cfc69bb96"
ConnectionType	yes	enum (see examples)	The type of user that established the connection.	"reporter", "analyst"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null</i> , <i>false</i> , <i>true</i>

Corner

Indicates a Corner taking place. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"corner"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that takes the corner.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Danger Possession

The participant has the ball in the attack and is creating danger for the opposition. Scoring is possible. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"danger_possession"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that has possession of the ball.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2

Property	Required	Type	Description	Examples
PossessionType	no	enum (see examples)	The danger associated to the current possession.	"SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Disconnected

A connection has been terminated. The field ConnectionType identifies the type of user that disconnected.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"disconnected"
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
ConnectionServerId	yes	string	Internal Id of the server.	"94c7697e-c3bf-4f7f-b5f8-da865b067d3c", "d8414e0b-1a7a-43b1-a3ff-0b8d9d7c4d1b"
ConnectionType	yes	enum (see examples)	The type of user that closed the connection.	"reporter", "analyst"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Free Kick

Indicates a Free Kick taking place. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"free_kick"
Clock	yes	Clock	Game clock. See Clock	See object details

Property	Required	Type	Description	Examples
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false, true</i>
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.FreeKickType	no	enum (see examples)	The danger zone associated to the free kick.	<i>null, "Safe", "Attack", "Danger", "HighDanger", "Offside"</i>
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that takes the free kick.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	<i>null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"</i>
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	<i>"Soccer"</i>
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>

Goal

Indicates a Goal. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	<i>"goal"</i>
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false, true</i>
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.GoalType	no	enum (see examples)	The type of goal.	<i>null, "Shot", "Head", "Own", "Other"</i>
Data.PlayerId	no	number, null	External Id of the player that scored, if applicable.	<i>null, 1004569, 3240098, 8891242</i>
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436

Property	Required	Type	Description	Examples
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Kickoff	no	KickoffDetails	Kick-off information. See KickoffDetails	See object details
Participant	yes	number	The team that scores the goal.	1, 2
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Goal Kick

A team does a goal-kick to start the play again. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"goal_kick"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that does the goal kick.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

halftime_finalised

Halftime data finalised. Sent by the Analyst/Supervisor once halftime data has been reviewed and verified, indicating that halftime markets can be safely settled. The action may be sent multiple times for the same halftime period.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"halftime_finalised"
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
PlayerStats	no	PlayerStatsForParticipants	Player statistics at the moment halftime was finalised. See PlayerStatsForParticipants	See object details
Score	no	Score	Score information, referencing the current score of the game at the moment halftime was finalised. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	Fixture status at the moment halftime was finalised. See StatusId .	3, 8
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

High Danger Possession

The participant has the ball in the attack and is creating chances. Scoring is likely. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"high_danger_possession"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that has possession of the ball.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	"SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Injury

Reports a player injury situation for a team. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"injury"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Outcome	no	enum (see examples)	The outcome of the injury for the player, indicating if they can return to the game, or not.	null, "OnPitch", "OffPitch", "NotReturning"
Data.Participant	no	number, null	Team that suffers the injury.	null, 1, 2
Data.PlayerId	no	number, null	External Id of the player that was injured. Can be modified via action amend.	null, 1290003, 5020305, 3290005
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Jersey

Color of a team jerseys for the given participant in this fixture. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"jersey"
Clock	no	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Color	no	enum (see examples)	Color of the jersey for the team.	null, "red", "navyblue", "skyblue", "green", "white", "black", "yellow", "orange", "grey", "burgundy", "brown", "purple", "blue", "olive", "aqua", "gold"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99

Property	Required	Type	Description	Examples
Participant	yes	number	Referenced participant number (Participant1 vs Participant2). Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	no	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Kickoff

The actual kickoff. Clock and Type can be modified via action amend. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"kickoff"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Kickoff	yes	KickoffDetails	Kick-off information. See KickoffDetails	See object details
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Kickoff Team

The team that will kickoff the game. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"kickoff_team"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	no	number, null	The team that does the kickoff.	null, 1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Lineup

Sent when the lineup is confirmed.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"lineup"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"

Property	Required	Type	Description	Examples
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>

Lineups

Team lineups (pregame)

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"lineups"
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false, true</i>
ConnectionId	no	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Lineups	yes	Array< LineupData >, null	Player lineup information.	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>

Penalty Attempt

Indicates a Penalty awarded to a team. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"penalty"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false, true</i>
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that takes the penalty.	1, 2
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48

Property	Required	Type	Description	Examples
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Penalty Outcome

Indicates the outcome of a Penalty. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"penalty_outcome"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Outcome	no	enum (see examples)	The outcome of the penalty.	null, "Scored", "Missed", "Retake"
Data.PlayerId	no	number, null	External Id of the player that took the penalty, if applicable.	null, 1004569, 3240098, 8891242
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
FollowsAction	no	number	Action ID of a previous action that originated this action. It is used to indicate actions that may need to be discarded as a unit.	35, 17, 56, 67, 98
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Kickoff	no	KickoffDetails	Kick-off information. See KickoffDetails	See object details
Participant	yes	number	The team that took the penalty.	1, 2
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Penalty Shootout Team

The team that will start the penalty shootout. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"penalty_shootout_team"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that starts the shootout.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Player Stats Adjustment

Player stats adjustment message. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"player_stats_adjustment"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data. Participant1	no	Map<number, PlayerStats >	Player statistics for the referenced player. See PlayerStats	See object details
Data. Participant2	no	Map<number, PlayerStats >	Player statistics for the referenced player. See PlayerStats	See object details
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
PlayerStats	yes	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12

Property	Required	Type	Description	Examples
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Players on the pitch

Sent when the players come out onto the pitch before the game.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"players_on_the_pitch"
Clock	no	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	no	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Players on the pitch Adjustment

Adjustment message for players currently on the pitch. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"players_on_the_pitch_adjustment"
Clock	no	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	PlayersOnPitch	Players currently on the pitch for both teams. See PlayersOnPitch	See object details
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99

Property	Required	Type	Description	Examples
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	no	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Players Warming Up

Sent pre-game when the players are doing their warmup routines.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"players_warming_up"
Clock	no	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	no	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Possession

The participant takes possession of the ball. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"possession"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that has possession of the ball.	1, 2

Property	Required	Type	Description	Examples
Possession	yes	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	<i>null</i> , <i>"SafePossession"</i> , <i>"AttackPossession"</i> , <i>"DangerPossession"</i> , <i>"HighDangerPossession"</i>
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null</i> , <i>false</i> , <i>true</i>

Possible

Indicates a possible event, either in game or for a specific participant. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"possible"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Corner	no	boolean	A possible corner.	<i>false</i> , <i>true</i>
Data.Goal	no	boolean	A possible goal.	<i>false</i> , <i>true</i>
Data.Penalty	no	boolean	A possible penalty.	<i>false</i> , <i>true</i>
Data.RedCard	no	boolean	A possible red card in play.	<i>false</i> , <i>true</i>
Data.VAR	no	boolean	A possible VAR review in play.	<i>false</i> , <i>true</i>
Data.YellowCard	no	boolean	A possible yellow card in play.	<i>false</i> , <i>true</i>
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Parti1State	yes	PartiState	State for the Participant1 . Home/away mapping is provided by the Participant1IsHome flag on the fixture. See PartiState	See object details
Parti2State	yes	PartiState	State for the Participant2 . Home/away mapping is provided by the Participant1IsHome flag on the fixture. See PartiState	See object details
Participant	no	number, null	The team for which we signal a possible event. If missing or null, the event is for the whole game.	<i>null</i> , 1, 2
PossibleEvent	yes	PossibleNeutralEvent	Possible events active in the game. They affect both teams. See PossibleNeutralEvent	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null</i> , <i>false</i> , <i>true</i>

Red Card

A player has received a Red card. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"red_card"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.PlayerId	no	number, null	External Id of the player that received the yellow card, if applicable.	null, 1004569, 3240098, 8891242
Data.Type	no	enum (see examples)	Type of Red card.	null, "StraightRed", "SecondYellow"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that gets the card.	1, 2
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Safe Possession

The participant has the ball in the safe possession area. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"safe_possession"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that has possession of the ball.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2

Property	Required	Type	Description	Examples
PossessionType	no	enum (see examples)	The danger associated to the current possession.	"SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Score Adjustment

Score adjustment. In cases when there are missed scoring data updates (e.g. goals) or if there were no updates for a period due to unforeseen circumstances, a score adjustment may be sent that will update **ONLY** the main score for a given half or period. Once that happens, the other stats in the given half may not be accurate any more. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"score_adjustment"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data. Participant1	yes	ScoreParticipant	The score for participant 1. See ScoreParticipant	See object details
Data. Participant2	yes	ScoreParticipant	The score for participant 2. See ScoreParticipant	See object details
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Score	yes	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Shot

Indicates a shot attempt by a player. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"shot"
Clock	yes	Clock	Game clock. See Clock	See object details

Property	Required	Type	Description	Examples
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false, true</i>
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Outcome	no	enum (see examples)	The outcome of the shot.	<i>null, "OnTarget", "OffTarget", "Woodwork", "Blocked"</i>
Data.PlayerId	no	number, null	External Id of the player that made the shot, if applicable.	<i>null, 1004569, 3240098, 8891242</i>
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that attempts the shot.	1, 2
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>

Standby

Sent just before the start of the game and additional periods. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"standby"
Clock	no	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	<i>false, true</i>
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
FixtureGroup	no	null, string	Name of the competition associated to the fixture.	<i>null, "PremierLeague", "LaLiga"</i>
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
GameType	no	enum (see examples)	Type of game, by duration of each half.	<i>null, "2x45m", "2x40m"</i>
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48

Property	Required	Type	Description	Examples
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Status

Sets the current game status/period. It can be deleted/canceled. Overtime is signalled with an additional field included only during overtime. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"status"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data. ManualStatusChange	no	boolean	Set to true if the game status was updated through the manual status change feature.	false, true
Data.StatusId	no	number	The id for the current game status/period.	2, 4, 7, 9, 12
Data. StatusName	no	string	The name associated to the status id.	"NS", "H1", "H2", "ET1", "F"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Kickoff	no	KickoffDetails	Kick-off information. See KickoffDetails	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Substitution

Sent when a team makes a substitution. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"substitution"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true

Property	Required	Type	Description	Examples
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See <i>object details</i>
Data.Participant	no	number	Team making the substitution.	1, 2
Data.PlayerInId	no	number, null	External Id of the player entering the field.	null, 3290005, 5020305, 1290003
Data.PlayerOutId	no	number, null	External Id of the player leaving the field.	null, 3290005, 5020305, 1290003
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
FollowsAction	no	number	Action ID of a previous action that originated this action. It is used to indicate actions that may need to be discarded as a unit.	35, 17, 56, 67, 98
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Suspend

Used to set the game to unreliable and back to reliable if required due to any serious unforeseen situations with coverage, stats, or other circumstances. Upon match starting and if no previous suspend action is sent, Reliable is assumed. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"suspend"
Clock	no	Clock	Game clock. See Clock	See <i>object details</i>
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See <i>object details</i>
Data.IsAnalyst	no	boolean, null	True if the sender of the message is an analyst.	null, true, false
Data.Locked	no	boolean, null	True if the scout is locked out of the fixture.	null, true, false
Data.Reliable	no	boolean, null	True if the match information is reliable.	null, true, false
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689

Property	Required	Type	Description	Examples
Type	no	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Throw In

Indicates a Throw In. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"throw_in"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data. ThrowInType	no	enum (see examples)	The danger zone associated to the throw in.	null, "Safe", "Attack", "Danger"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Parti1State	no	PartiState	State for the Participant1 . Home/away mapping is provided by the Participant1IsHome flag on the fixture. See PartiState	See object details
Parti2State	no	PartiState	State for the Participant2 . Home/away mapping is provided by the Participant1IsHome flag on the fixture. See PartiState	See object details
Participant	yes	number	The team that scores the goal.	1, 2
Possession	no	number	Participant that has the ball. Home/away mapping is provided by the Participant1IsHome flag on the fixture.	1, 2
PossessionType	no	enum (see examples)	The danger associated to the current possession.	null, "SafePossession", "AttackPossession", "DangerPossession", "HighDangerPossession"
PossibleEvent	no	PossibleNeutralEvent	Possible events active in the game. They affect both teams. See PossibleNeutralEvent	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Unreliable Corners

Indicates that the stats for corners for both teams may be unreliable. It is being verified.. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"unreliable_corners"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Unreliable	no	boolean	If true, it indicates the stats for corners for both teams may be unreliable and it is being verified.	true, false
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
UnreliableCorners	no	boolean	If true, it indicates the stats for corners for both teams may be unreliable and it is being verified.	true, false
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Unreliable Yellow Cards

Indicates that the count of yellow and red cards for both teams may be unreliable. It is being verified.. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"unreliable_yellow_cards"
Clock	yes	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Unreliable	no	boolean	If true, it indicates the count of yellow and red cards for both teams may be unreliable and it is being verified.	true, false
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
UnreliableCards	no	boolean	If true, it indicates the stats for corners for both teams may be unreliable and it is being verified.	true, false
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

VAR

Indicates a VAR (Video Assistant Referee) review has started. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"var"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Type	no	enum (see examples)	What action is being reviewed.	null, "Goal", "Penalty", "RedCard", "SecondYellowCard", "CornerKick", "MistakenIdentity", "Other"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

VAR End

Indicates a VAR (Video Assistant Referee) review has ended. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"var_end"
Clock	yes	Clock	Game clock. See Clock	See object details
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Outcome	no	enum (see examples)	Outcome of the review.	null, "Stands", "Overturned"

Property	Required	Type	Description	Examples
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See object details
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See object details
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Venue

Update to confirm if the game is being played on the home team, away team or a neutral venue. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"venue"
Clock	no	Clock	Game clock. See Clock	See object details
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See object details
Data.Type	no	enum (see examples)	Venue Type.	"home", "away", "neutral"
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	no	number	The ID for the current game period. See StatusId .	2, 4, 7, 9, 12
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Weather

Current weather at the venue - can be sent approx 30 minutes prior to start as well as during the game if the conditions change. This action is *confirmed automatically* and will not be followed up with a confirmation message.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"weather"
Clock	no	Clock	Game clock. See Clock	See object details

Property	Required	Type	Description	Examples
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See <i>object details</i>
Data.Conditions	no	Array<enum (see examples)>, null	List of weather conditions at the venue. Usually a combination of 'day' or 'night' plus one of the other values.	See <i>object details</i>
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	2, 6, 1, 4, 3
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	null, false, true

Yellow Card

A player has received a Yellow card. This action *can be followed up with updates* - new messages with the same action id can update this action.

Property	Required	Type	Description	Examples
Action	yes	enum (see examples)	Action Type.	"yellow_card"
Clock	yes	Clock	Game clock. See Clock	See <i>object details</i>
Confirmed	yes	boolean	Action confirmation status. This indicates an action that actually happened, as opposed to <i>possible</i> actions, however the final confirmation is still pending and will be sent with the same action ID, and potentially more information related to the action. An unconfirmed event is closer in time to the event happening, as confirmation could be delayed by events on field. Take this in account when handling the events.	false, true
ConnectionId	yes	number	Internal ID of the connection.	12, 13, 9, 1, 18
Data	yes	object	Action specific info.	See <i>object details</i>
Data.PlayerId	no	number, null	External Id of the player that received the yellow card, if applicable.	null, 1004569, 3240098, 8891242
FixtureId	yes	number	The normative Id of the fixture.	10461989, 10190463, 10260031, 10026403, 10471436
Id	yes	number	Action ID. Messages for the same action will have the same action ID. For example, an unconfirmed action followed by a confirmation.	36, 18, 57, 68, 99
Participant	yes	number	The team that gets the card.	1, 2
PlayerStats	no	PlayerStatsForParticipants	Player statistics. See PlayerStatsForParticipants	See <i>object details</i>
Score	no	Score	Score information, referencing the current score of the game, not the change caused by this action. Score is provided in actions that can modify the score-line. See Score	See <i>object details</i>
Seq	yes	number	Update sequence number for a fixture.	52, 60, 74, 40, 48
StatusId	yes	number	The ID for the current game period. See StatusId .	11, 1, 5, 6, 2
Ts	yes	number	Timestamp of the update.	1732878668797, 1732878371314, 1732878438368, 1732878219489, 1732879081689
Type	yes	enum (see examples)	Sport Type.	"Soccer"

Property	Required	Type	Description	Examples
VirtualFixture	no	null, boolean	If true, the fixture is a virtual fixture, used to replay events of an existing fixture for test purposes.	<i>null, false, true</i>