

RStudio IDE :: CHEATSHEET



Documents and Apps

Open Shiny, R Markdown, knitr, Sweave, LaTeX, .Rd files and more in Source Pane

Check spelling

Render output

Choose output format

Configure render options

Insert code chunk

Publish to server

Jump to previous chunk

Jump to next chunk

Run code

Show file outline

Visual Editor (reverse side)

Jump to section or chunk

Run all previous code chunks

Run this code chunk

Set knitr chunk options

Access markdown guide at **Help > Markdown Quick Reference**
See reverse side for more on **Visual Editor**

RStudio recognizes that files named **app.R**, **server.R**, **ui.R**, and **global.R** belong to a shiny app

Run app

Choose location to view app

Publish to shinyapps.io or server

Manage publish accounts

Source Editor

Navigate backwards/forwards

Open in new window

Save

Find and replace

Compile as notebook

Run selected code

Re-run previous code

Source with or w/out Echo or as a Local Job

Show file outline

Multiple cursors/column selection with **Alt + mouse drag**.

Code diagnostics that appear in the margin. Hover over diagnostic symbols for details.

Syntax highlighting based on your file's extension

Tab completion to finish function names, file paths, arguments, and more.

Multi-language code snippets to quickly use common blocks of code.

Jump to function in file

Change file type

Working Directory

Run scripts in separate sessions

Maximize, minimize panes

Ctrl/Cmd + arrow up to see history

R Markdown Build Log

Drag pane boundaries

Tab Panes

Import data with wizard

History of past commands to run/copy

Manage external databases

View memory usage

R tutorials

Load workspace

Save workspace

Clear R workspace

Search inside environment

Choose environment to display from list of parent environments

Display objects as list or grid

Displays saved objects by type with short description

View in data viewer

View function source code

Create folder

Delete file

Rename file

More file options

Change directory

Path to displayed directory

A File browser keyed to your working directory. Click on file or directory name to open.

Version Control

Turn on at **Tools > Project Options > Git/SVN**

Added

Deleted

Modified

Renamed

Untracked

Stage files:

Commit staged files

Push/Pull to remote

View History

Current branch

Open shell to type commands

Show file diff to view file differences

Changes

History

no branch

Stage

Revert

Ignore

Pull

Push

Staged

Status

Path

Commit message

Amend previous commit

Commit

Show

Staged

Unstaged

Context

5 lines

Ignore WhiteSpace

Stage All

Discard All

@@ -1,13 +1,11 @@

1 #

2 # This is a Shiny web application. You can run the application by clicking

Debug Mode

Use **debug()**, **browser()**, or a breakpoint and execute your code to open the debugger mode.

Launch debugger mode from origin of error

Open traceback to examine the functions that R called before the error occurred

Console

Terminal

Jobs

> hello()

Error

Show Traceback

Rerun with Debug

Package Development

Create a new package with **File > New Project > New Directory > R Package**

Enable roxygen documentation with **Tools > Project Options > Build Tools**

Roxygen guide at **Help > Roxygen Quick Reference**

See package information in the **Build Tab**

Install package and restart R

Run devtools::load_all() and reload changes

Run R CMD check

Customize package build options

Clear output and rebuild

Run package tests

RStudio opens plots in a dedicated **Plots** pane

Navigate recent plots

Open in window

Export plot

Delete plot

Delete all plots

GUI **Package** manager lists every installed package

Install Packages

Update Packages

Browse package site

Click to load package with **library()**. Unclick to detach package with **detach()**.

Package version installed

Delete from library

RStudio opens documentation in a dedicated **Help** pane

Home page of helpful links

Search within help file

Search for help file

Viewer pane displays HTML content, such as Shiny apps, RMarkdown reports, and interactive visualizations

Stop Shiny app

Publish to shinyapps.io, Posit Connect, Posit Cloud,...

Refresh

View(<data>) opens spreadsheet like view of data set

Filter rows by value or value range

Sort by values

Search for value

Click next to line number to add/remove a breakpoint.

Highlighted line shows where execution has paused

Run commands in environment where execution has paused

Examine variables in executing environment

Select function in traceback to debug

Console

Terminal

Jobs

Next

Step through code one line at a time

Step into and out of functions to run

Continue

Resume execution

Stop

Quit debug mode




Keyboard Shortcuts


RUN CODE	Windows/Linux	Mac
Search command history	Ctrl+ arrow-up	Cmd+ arrow-up
Interrupt current command	Esc	Esc
Clear console	Ctrl+L	Ctrl+L
NAVIGATE CODE		
Go to File/Function	Ctrl+.	Ctrl+.
WRITE CODE		
Attempt completion	Tab or Ctrl+Space	Tab or Ctrl+Space
Insert <- (assignment operator)	Alt+-	Option+-
Insert > or %>% (pipe operator)	Ctrl+Shift+M	Cmd+Shift+M
(Un)Comment selection	Ctrl+Shift+C	Cmd+Shift+C
MAKE PACKAGES	Windows/Linux	Mac
Load All (devtools)	Ctrl+Shift+L	Cmd+Shift+L
Test Package (Desktop)	Ctrl+Shift+T	Cmd+Shift+T
Document Package	Ctrl+Shift+D	Cmd+Shift+D

DOCUMENTS AND APPS	Windows/Linux	Mac
Knit/Render Document (knitr)	Ctrl+Shift+K	Cmd+Shift+K
Insert chunk (Sweave & Knitr)	Ctrl+Alt+I	Cmd+Option+I
Run from start to current line	Ctrl+Alt+B	Cmd+Option+B
MORE KEYBOARD SHORTCUTS		
Keyboard Shortcuts Help	Alt+Shift+K	Option+Shift+K
Show Command Palette	Ctrl+Shift+P	Cmd+Shift+P

View the Keyboard Shortcut Quick Reference with **Tools > Keyboard Shortcuts** or **Alt/Option + Shift + K**

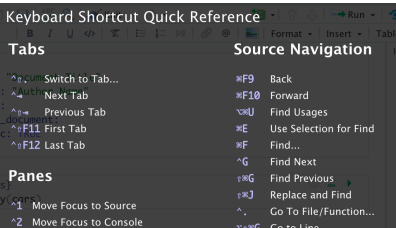

Search for keyboard shortcuts with **Tools > Show Command Palette** or **Ctrl/Cmd + Shift + P**.

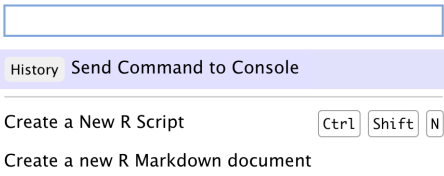

Visual Editor

Block format

Check spelling

Render output

Choose output format

Choose output location

Insert code chunk

Jump to previous chunk

Jump to next chunk

Run selected lines

Publish to server

Show file outline

Back to Source Editor (front page)

Heading 2

B

I

U

</>

Format

Insert

Table

title: "Document Title"

author: "Author Name"

output:

html_document:

toc: TRUE

Insert verbatim code

Clear formatting

Lists and block quotes

Links

Citations

Images

More formatting

Insert blocks, citations, equations, and special characters

R Markdown Including Plots

File outline

Insert and edit tables

{r setup, include=FALSE}

knitr::opts_chunk\$set(echo = TRUE)

Add/Edit attributes

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents.

{r cars}

summary(cars)

Jump to chunk or header

Set knitr chunk options

Run this and all previous code chunks

Run this code chunk

Posit Workbench



WHY POSIT WORKBENCH?

- Extend the open source server with a commercial license, support, and more:
- open and run multiple R sessions at once
 - tune your resources to improve performance
 - administrative tools for managing user sessions
 - collaborate real-time with others in shared projects
 - switch easily from one version of R to a different version
 - integrate with your authentication, authorization, and audit practices
 - work in the RStudio IDE, JupyterLab, Jupyter Notebooks, or VS Code

Download a free 45 day evaluation at posit.co/products/enterprise/workbench/

Share Projects

File > New Project

RStudio saves the call history, workspace, and working directory associated with a project. It reloads each when you re-open a project.

Start new R Session in current project

Close R Session in project

Active shared collaborators

Name of current project

Share Project with Collaborators

Select R Version

New Project...

Open Project...

Close Project

Share Project...

IDecheatsheet

RStudio-Essentials

Essentials

shiny-examples

Clear Project List

Project Options...

R version 3.2.2

R version 3.1.3

R version 3.0.3

R version 2.15.3

Run Remote Jobs

Run R on remote clusters (Kubernetes/Slurm) via the Job Launcher

Monitor launcher jobs

Launch a job

Run launcher jobs remotely

Run

Source

Source with Echo

Source as Launcher Job...

Source as Local Job...

Console

Terminal

Jobs

Launcher

Start Launcher Job

Sorted by submission time

fast.R

Running

Local

0:09

sleepy.R

Succeeded 11:22 AM

Local

0:41

sleepy.R

Idle

KubernetesX

Waiting