

000
001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
034
035
036
037
038
039
040
041
042
043
044
045
046
047
048
049
050
051
052
053
054

Randomer Forests

Abstract

Random forest (RF) has been shown to outperform many other classifiers on a variety of datasets, yet its restriction of recursive partitions of the feature space to be axis-aligned is suboptimal in many cases. Several studies have proposed “oblique” decision forest methods to address this limitation. However, these methods either aren’t well-adapted to problems in which the number of irrelevant features are overwhelming, have a time and space complexity significantly greater than RF, or require additional hyperparameters to be tuned, rendering training of the classifier more difficult. In this work, we establish a generalized forest building scheme, random projection forests. Random forests and many other currently existing decision forest algorithms can be viewed as special cases of this scheme. With this scheme in mind, we propose a special case which we call randomer forests (RerFs). We demonstrate that RerF empirically outperforms RF and another recently proposed oblique forest method in simulations and on benchmark data, and also show that it scales comparably to RF in terms of time and space complexity. Lastly, we propose two augmentations to RerF with the goal of making it more robust to affine transformations and outliers. We conclude that RerF is a competitive alternative to RF and other oblique forests. Open source code will be available.

1. Introduction

Data science is becoming increasingly important as our ability to collect and process data continues to increase. Supervised learning—the act of using predictors to make a prediction about some target data—is of special interest to many applications, ranging from science to government to industry. Classification, a special case of supervised learning, in which the target data is categorical, is one of the

most fundamental learning problems, and has been the subject of much study. A simple pubmed search for the term “classifier” reveals nearly 10,000 publications, and a similar arXiv search reports approximately 1000 hits. One of the most popular and best performing classifiers is random forests (RFs) (Breiman, 2001). Two recent benchmark papers assess the performance of many different classification algorithms on many different datasets (Fernandez-Delgado et al., 2014; Caruana et al., 2008), and both concluded the same thing: RFs are the best classifier.

RF typically refers to Breiman’s Forest-IC, which uses axis-parallel (Heath et al., 1993), or orthogonal trees (Menze et al., 2011). That is, the feature space is recursively split along directions parallel to the axes of the feature space. Thus, in cases in which the classes seem inseparable along any single dimension, RF may be suboptimal. To address this, Breiman also proposed and characterized Forest-RC, which used linear combinations of coordinates rather than individual coordinates, to split along. Others have studied several different variants of “oblique” decision forests, including efforts to learn good projections (Heath et al., 1993; Tan & Dowe, 2005), using principal components analysis to find the directions of maximal variance (Ho, 1998; Rodriguez et al., 2006), or directly learning good discriminant directions (Menze et al., 2011). Another recently proposed method, called random rotation RF, uniformly randomly rotates the data for every decision tree in the ensemble prior to inducing the tree (Blaser & Fryzlewicz, 2015). While all of these recent approaches deal with rotational invariance, they fail to address two important issues. First, in real world data, the proportion of features that are irrelevant is often large, especially for high dimensional data, giving rise to optimal decision boundaries that are sparse. In such cases, we say that the signal is *compressive*. To our knowledge, all of the proposed oblique decision forests, with the exception of Forest-RC if tuned appropriately, do not impose a constraint on the sparsity of recursive partitions of the feature space. Therefore, such methods may be suboptimal in cases in which the signal is compressive. Second, as our ability to collect and process data continues to increase, we are encountering increasingly massive datasets. Therefore, time- and space-efficient methods are becoming more and more important. With the exception of Forest-RC, all oblique methods require expensive computation and/or storage. There is therefore a gap that calls for the construction of a scalable

055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107
108
109

110
111
112
113
114
115
116
117
oblique decision forest classifier that can perform well in
the presence of an overwhelming number of irrelevant fea-
tures. It is true that Forest-RC fits this description. How-
ever, the number of features that are linearly combined to
generate candidate splits is fixed across all nodes of every
tree. Such a construction requires an additional hyperpa-
rameter to be tuned, and also limits the diversity of trees.

118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
To address this, we first state a generalized forest building
scheme, random projection forests, which includes all of
the above algorithms as special cases. This enables us to
formally state our objective, and provides a lens that en-
ables us to propose a few novel special cases, which we
refer to as “*Randomer Forests*” (or RerFs for short), for rea-
sons that will become clear in the sequel. We both theoreti-
cally and empirically demonstrate that our methods have
the same time and space complexity as random forests, and
show on simulated datasets that it performs well in the face
of many irrelevant features and when axis-aligned splits are
suboptimal. Additionally, we demonstrate that our method
empirically outperforms both RF and random rotation RF
(RotRF), which is another oblique method (Blaser & Fry-
zlewicz, 2015), on a suite of benchmark datasets. Lastly,
we propose two augmentations to RerF for making the
method more robust to affine transformations and outliers.
To conclude, we propose our method as a competitive al-
ternative to RF and other oblique decision forest methods.
Open source code will be made available.

138 139 2. Random Projection Forests

140
141 Let $\mathcal{D}^n = \{(X_i, y_i) : i \in [n]\}$ be a given dataset, where
142 $X_i \in \mathbb{R}^p$ and $y_i \in \mathcal{Y} = \{\tilde{y}_1, \dots, \tilde{y}_C\}$. A classifica-
143 tion forest, $\bar{g}(X; \mathcal{D}^n)$ is an ensemble of L decision trees,
144 each tree $g^l(X; \mathcal{D}^l)$ is trained on a (sub)set of the data,
145 $\mathcal{D}^l \subset \mathcal{D}^n$. Random Projection forests are a special case
146 of classification forests that subsume all of the strategies
147 mentioned above (see Pseudocode 1). The key idea of all
148 of them is that at each node of the tree, we have a set of
149 predictor data points, $\bar{X} = \{X_s\}_{s \in \mathcal{S}_{ij}^l} \in \mathbb{R}^{p \times S_{ij}^l}$, where
150 $S_{ij}^l = |\mathcal{S}_{ij}^l|$ is the cardinality of the set of predictor data
151 points at the $(ij)^{th}$ node of the l^{th} tree. We sample a
152 matrix $A \sim f_A(\mathcal{D}^n)$, where $A \in \mathbb{R}^{p \times d}$, possibly in a
153 data dependent fashion, which we use to project the predi-
154 tor matrix \bar{X} onto a lower dimensional subspace, yielding
155 $\tilde{X} = A^\top \bar{X} \in \mathbb{R}^{d \times S_{ij}^l}$, where $d \leq p$ is the dimensionality
156 of the subspace. To wit, Breiman’s original Forest-IC
157 algorithm can be characterized as a special case of ran-
158 dom projection forests. In particular, in Forest-IC one constructs
159 A such that for each of the d columns, we sample a coordi-
160 nate (without replacement), and put a 1 in that coordinate,
161 and zeros elsewhere. Breiman’s Forest-RC constructs A by
162 sampling a fixed number of coordinates (without replace-
163 ment) for each of the d columns, and puts a value uniformly
164

sampled from [-1,1] in each of those coordinates. Similarly,
Ho’s rotation forests construct A from the top d principal
components of the data \bar{X} at a given node. Thus, the key
difference in all these approaches is the choice of f_A .

165
166
167
168
169
170
171
172
Algorithm 1 Psuedocode for Random Projection Forests,
which generalizes a wide range of previously proposed de-
cision forests.

173
174
175
176
Input: data: $\mathcal{D}^n = (X_i, y_i) \in (\mathbb{R}^p \times \mathcal{Y})$ for $i \in [n]$, tree
rules (stopping criteria, rules for sampling data points
per tree, etc.), distributions on $d \times p$ matrices: $A \sim$
 $f_A(\mathcal{D}^n)$, preprocessing rules

177
178
Output: decision trees, predictions, out of bag errors,
etc.

179
Preprocess according to rule

180
for each tree **do**

181
182 Subsample data to obtain (\bar{X}, \bar{y}) , the set of data points
to be used in this tree

183
for each leaf node in tree **do**

184
Let $\tilde{X} = A^\top \bar{X} \in \mathbb{R}^{d \times s}$, where $A \sim f_A(\mathcal{D}^n)$

185
Find the “best” split coordinate k^* in \tilde{X} and “best”
split value $t^*(k^*)$ for this coordinate

186
Split X according to whether $X(k) > t^*(k^*)$

187
Assign each child node as a leaf or terminal node
according to stopping criteria

188
end for

189
end for

190
Prune trees according to rule

191
192
193
The goal of this work is to find a random projection for-
est that shares RF’s scalability and ability to perform well
when many irrelevant predictors are present, yet is able to
find decision boundaries that are less biased by geometri-
cal constraints (i.e. not constrained to be axis-aligned), by
changing the distribution f_A . The result we call randomer
forests (or RerFs for short).

194 195 3. Randomer Forests

196
Our choice in f_A is based on the following three ideas:

- 197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
1. While RF empirically performs well in many settings,
it is quite restrictive in that candidate splits evaluated
at each node are constrained to be axis-aligned. It is
sometimes the case that axis-aligned splits are subop-
timal, and oblique splits may be desired.
2. It is often the case that the number of *relevant* fea-
tures is substantially smaller than the number of total
features. We say that the signal is *compressive* in
such cases. RF often does well when the signal
is compressive, which may be attributed, in part, to
the extreme sparsity constraint on the columns of A .
All of the oblique decision forest algorithms to date,

220	with the exception of Forest-RC, do not impose a sparsity constraint on the candidate split directions, which may cause such algorithms to underperform when the signal is compressive.	275
221		276
222		277
223		278
224		279
225	3. Except for Breiman's Forest-RC, existing oblique decision forest algorithms involve expensive computations to identify and select splits, rendering them less space and time efficient than Forest-IC or Forest-RC. An oblique decision forest having a space and time complexity comparable to Forest-IC or Forest-RC is desirable.	280
226		281
227		282
228		283
229		284
230		285
231		286
232		287
233	To this end, we employ very sparse random projections (Li et al., 2006). Rather than sampling d non-zero elements of A and enforcing that each column gets a single non-zero number (without replacement) as RF does, we relax these constraints and select d non-zero numbers from $\{-1, +1\}$ with equal probabilities and distribute uniformly at random in A .	288
234		289
235		290
236		291
237		292
238		293
239		294
240	It is apparent that RerF bares a resemblance to Forest-RC, yet there is one key difference. In Forest-RC, the number of nonzeros in each column of A is fixed to be the same across A and for every split node, and its optimal value has to be found through parameter selection. Our construction circumvents selection of this parameter by randomizing the number of nonzeros in each column of A . Furthermore, our algorithm allows A to have columns of varying sparsity, which may promote more diversity in the ensemble. To our knowledge, this property does not exist in any of the proposed random projection forest algorithms. Lastly, we note that our construction of A preserves distances between points with high probability (Li et al., 2006).	295
241		296
242		297
243		298
244		299
245		300
246		301
247		302
248		303
249		304
250		305
251		306
252		307
253		308
254	4. Experimental Results	309
255		310
256	4.1. Simulations Involving Compressive Signals	311
257	Many classification problems arise in which the signal is compressive and the optimal split directions are not axis-aligned. We constructed two synthetic datasets with both of these properties to compare classification performance and training time of RF, RerF, and RotRF:	312
258		313
259		314
260		315
261		316
262		317
263	Sparse parity is a variation of the noisy parity problem. The noisy parity problem is a multivariate generalization of the noisy XOR problem and is one of the hardest constructed binary classification problems. In the noisy parity problem, a given sample has a mean whose elements are Bernoulli samples with probability 1/2, and then Gaussian noise is independently added to each dimension with the same variance. A sample's class label is equal to the parity of its mean. Sparse parity is an adaption of this problem in which the sample's class label is equal to the parity of only the first $p*$ elements of the mean, rendering the remaining	318
264		319
265		320
266		321
267		322
268		323
269		324
270		325
271		326
272		327
273		328
274		329

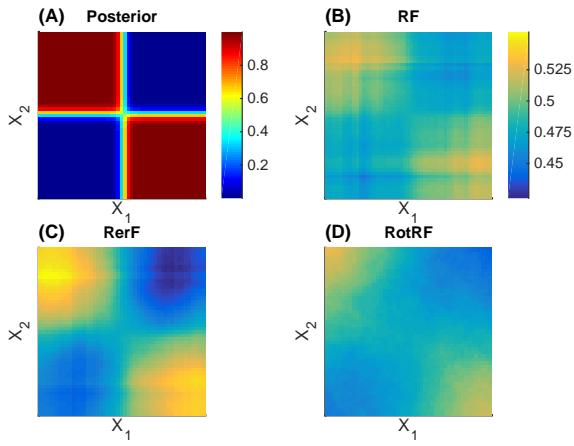


Figure 1. Class posteriors for the sparse parity problem in the first two dimensions (refer to section 4.1 for details). (A): True posteriors. (B) - (D): Posterior estimates for RF, RerF, and RotRF, respectively. Comparing panels B-D with A, it is evident that RerF produces better estimates of the posteriors than does RF or RotRF

purity was used as the split criteria. The only parameter tuned was d , the number of candidate split directions evaluated at each split node. When $p \leq 5$, each classifier was trained for all $d \in [p]$. When $p > 5$, each classifier was trained for all $d \in \{1, p^{1/4}, p^{1/2}, p^{3/4}, p\}$. Misclassification rates for each classifier were selected as the lowest achieved from the different values of d tried. Training times for each classifier were computed by averaging the training times given by all values of d tried. For sparse parity, n was fixed at 1000 and classifiers were evaluated for $p \in \{2, 5, 10, 25, 50, 100\}$. The relevant number of features p^* was fixed at a value of 3. For Trunk, n was fixed at 100 and RF and RerF were evaluated for $p \in \{2, 10, 50, 100, 500, 1000\}$. RotRF was not evaluated for $p = 1000$ due to computational burden. Relative error and training times plotted are the average of 25 repeated trials, and error bars represent the standard error of the mean.

In panel B, RerF performs as well as or better than both RF and RotRF for all values of p . RotRF performs as well as or better than RF except for when $p = 25$. As conjectured, RotRF performs better than RF when p is small because oblique splits provide an advantage over axis-aligned splits in the sparse parity problem. As p increases and the ratio p^*/p decreases, RerF begins to outperform RotRF. Ultimately, when this ratio is small enough, RotRF performs even worse than RF. RerF's ability to perform relatively well can be attributed to the sparsity of oblique splits. In panel E, RerF outperforms RF for all values of p . This is because linear combinations of a few features can yield a

higher signal-to-noise ratio than any single feature. RotRF outperforms both RF and RerF up to $p = 100$. RotRF is able to perform better than RerF in these cases because a larger number of features can be linearly combined to yield an even higher signal-to-noise ratio. When $p = 500$, classification performance of RotRF significantly degrades and becomes worse than both RF and RerF. This can be explained by the fact that when p is large enough, RotRF often samples linear combinations of many features each having a low signal-to-noise ratio. Such projections will yield a lower signal-to-noise ratio than any single feature. In panels C and F, training times are comparable when p is small. As panel F indicates, training time of RotRF is significantly longer than those of RF and RerF when $p = 500$.

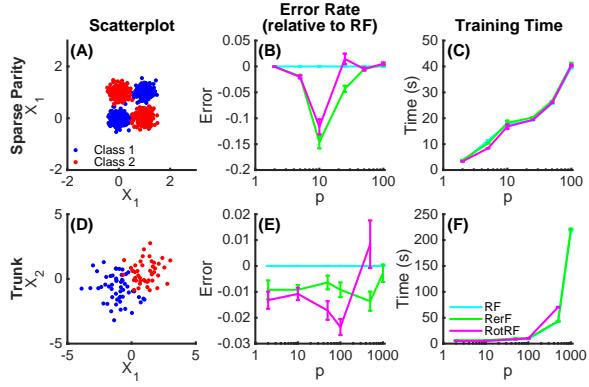


Figure 2. Sparse parity (A-C) and Trunk (D-F) simulations (see section 4.1 for details). (A) and (D): Scatterplots of sampled points in the first two dimensions. (B) and (E): Error rates of RerF and RotRF relative to RF across different values of p . (C) and (F): Same as (B) and (E) except absolute training time is plotted on the y-axis instead. The cyan, green, and magenta lines correspond to RF, RerF, and RotRF, respectively. This color coding is adopted in figures 3 and 4 that follow. Both RerF and RotRF do better than RF when the number of irrelevant features is sufficiently small, due to their ability to generate oblique partitions. However, when the number of irrelevant features becomes large enough, performance of RotRF rapidly degrades. Training times show that RerF scales identically with RF, while RotRF scales poorly with large p (note that in panels E and F, RotRF is only plotted up to $p = 500$ due to computational constraints).

4.2. Theoretical Space and Time Complexity

For a RF, assume there are L trees. If there are n data points per tree, and each tree grows until terminal nodes have only $\mathcal{O}(1)$ data points with p coordinates in them, there are $\mathcal{O}(n)$ nodes. Then the complexity of constructing the random forest, disregarding cross-validation or other randomization techniques for preventing overfitting, is $\mathcal{O}(Ln^2p \log n)$. In practice the trees are shallower and

330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439

stop much earlier than when nodes have $\mathcal{O}(1)$ points, so “in practice” the complexity often appears to be $\mathcal{O}(Lnp \log n)$. Storing RF requires $\mathcal{O}(Ln \log n)$ because each node can be represented by the index of the nonzero coordinate. The only additional space constraint is storing which indices are positive, and which are negative, which is merely another constant.

RerF has a very similar time and space complexity, unlike many of the other oblique random forest variants. Specifically, assume that RerF also has L trees, and n data points per tree, and no pruning, so $\mathcal{O}(n)$ nodes. Let n_k be the number of data points at node k of the tree. Like RF, RerF requires $\mathcal{O}(p)$ time to sample p non-zero numbers, and $\mathcal{O}(pn_k)$ time to obtain the new matrix, \tilde{X} , because it is a sparse matrix multiplication, in node k with $\mathcal{O}(n_k)$ points. RerF also takes another $\mathcal{O}(p/n \log(p/n)) = \mathcal{O}(1)$ time to find the best dimension. Thus, in total, in the case of well-balanced trees, RerF also requires only $\mathcal{O}(Lpn^2 \log n)$ time to train. To store the resulting RerF, like RF, requires $\mathcal{O}(Ln \log n)$, because each node can be represented by the indices of the coordinates that received a non-zero element, and the expected number of such indices is $\mathcal{O}(1)$. Note that these numbers are in stark contrast to other oblique methods. RotRFs, in particular, require a QR decomposition having a time complexity of $\mathcal{O}(p^3)$ in order to generate random rotation matrix for each tree. Rotating the data matrix prior to inducing each tree additionally requires $\mathcal{O}(np^2)$. Therefore, RotRF becomes very expensive to compute when p is large. This can explain the trend seen in Figure 2(F). In addition to storing all of the decision trees, RotRF has to store a rotation matrix for each tree, which requires $\mathcal{O}(p^2)$.

4.3. Effects of Transformations and Outliers

We next want to compare the robustness of RF, RerF, and RotRF to various data transformations. To do so, we consider several different modifications to the simulation settings described in the previous section: rotation, scale, affine, and outliers. To rotate the data, we simply generate rotation matrices uniformly and apply them to the data. To scale, we applied a scaling factor sampled from a uniform distribution on the interval [0,10] to each dimension. Affine transformations were performed by applying a combination of rotations and scalings as just described. Additionally, we examined the effects of introducing outliers. Outliers were introduced by sampling points from the distributions as previously described but instead using covariance matrices scaled up by a factor of four. Empirically, an addition of 20 points from these outlier models to the original 100 points was found to produce a noticeable but not overwhelming effect on classifier performance.

Figure 3 shows the effect of these transformations and out-

liers on the sparse parity (panels A-E) and Trunk (panels F-J) problems. Panels A-E show that RerF and RotRF outperform RF in both untransformed and transformed representations for Sparse Parity. This makes sense because linear combinations of variables can have some information about the class, whereas the original features are all uninformative on their own. For the trunk simulations, panel G shows that RotRF is more robust to rotations (as it should be), but is fragile in the face of affine transformations.

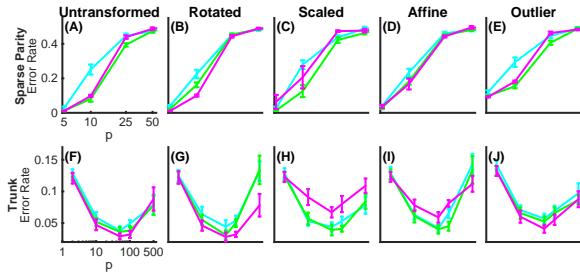


Figure 3. The effects of different transformations applied to the sparse parity (A-E) and Trunk (F-J) simulations on classification performance (see section 4.3 for details). Specifically, we consider rotations, scalings, affine transformations, as well as the addition of outliers. RerF and RotRF outperform RF on sparse parity. The trunk simulations demonstrate clearly that RotRF, while invariant to rotation, is sensitive to affine transformations.

4.4. Benchmark Data


In addition to the simulations, RF, RerF, and RotRF were evaluated on 117 of the 121 datasets as described in (Fernandez-Delgado et al., 2014). The four remaining datasets were not used because their high dimensionality and large number of data points rendered the classifiers both time and space costly, particularly for RotRF. As in the previous section, transformations, with the exception of outliers, were applied to the datasets to observe their affects on performance of the three algorithms. Classifiers were trained on the entire training sets provided. For each data set, misclassification rates were again estimated by out of bag error. The number of trees used in each algorithm was 1000 for datasets having at most 1000 data points and 500 for datasets having greater than 1000 data points. All algorithms were trained using five different values for d , and error rates for each algorithm were selected as the minimum given by the five. For each dataset, relative performance ratios for each algorithm were computed by dividing the error rate of each algorithm by the minimum error rate of the three. The empirical cumulative distribution functions of relative performance ratios for each algorithm were computed and plotted in panels A-D of Figure 4. Such plots are called performance profiles (Dolan & Moré,

495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549

605
606
607
608
609
610
611
612
613
614
615
616
617
618
619

550 2008). Performance profiles are useful in visualizing how
551 frequently a particular algorithm wins, and when it loses,
552 how frequently it loses by a certain amount. Areas under
553 the curves (AUCs) were computed for each performance
554 profile. This metric is valuable in that it doesn't neces-
555 sarily indicate how frequently a particular algorithm is the
556 best. Rather, it is an indicator of robustness. For instance,
557 it is possible that an algorithm that wins on the majority of
558 datasets can have a lower AUC than the other algorithms if,
559 when it loses, it frequently loses by a large margin. On the
560 original benchmarks (Figure 4 panel A), RerF achieves the
561 largest AUC, followed by RF and lastly RotRF. The same
562 trend is seen when scaling (panel C) and affine transfor-
563 mations (panel D) are applied. When the datasets are rotated,
564 RotRF achieves the largest AUC, followed by RerF, and
565 lastly RF.

566 Since the simulations in section 4.1 revealed that the speed
567 of RF and RerF scaled comparably, we wanted to see if this
568 observation held on the benchmark data. In the same fash-
569 ion as the top panels of Figure 4, we plotted performance
570 profiles for training times in the bottom panels. Across all
571 transformations, we see that RF and RerF perform compar-
572 ably in terms of speed. Panels A and C show that RotRF
573 performs the worst on the original benchmark data and the
574 randomly scaled benchmark data. It performs well, how-
575 ever, on the rotated and affine transformed data. One pos-
576 sible explanation for this is that when the data is rotated,
577 RF and RerF have a more difficult time finding good split
578 directions, which could result in deeper trees (and subse-
579 quently more time spent in training).

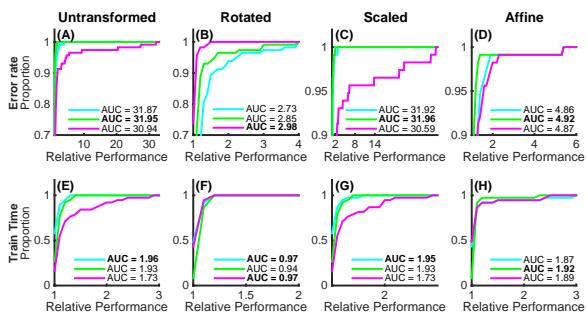

596 Figure 4. Classification (panels A-D) and speed (panels E-H)
597 performance profiles on benchmarks with various transforma-
598 tions applied (see section 4.4 for details). AUC denotes the area
599 under the curve. In terms of classification accuracy, RerF outper-
600 forms RF in all five data settings and only loses to RotRF when
601 the data is rotated. RF and RerF have comparable training time
602 performance, while RotRF tends to be slower.

4.5. Rank Transforming the Data and Fast Supervised Projections


When dimensions of X are linearly combined, we lose *scale and unit invariance*. We therefore note that random forests have a special property: they are invariant to monotonic transformations of the data applied to each coordinate in the ambient (observed) space. They are effectively operating on the order statistics, rather than actual magnitudes of coordinates. In other words, if we convert for each dimension the values of the samples to their corresponding ranks, random forests yield the exact same result. Therefore, for our second trick, we adopt the same policy, and “**pass to ranks**”, or rank transform, prior to doing anything else. We call RerFs that pass to ranks RerF(r).

Additionally, there is evidence that *using the data to construct A at each node* can significantly improve performance (Heath et al., 1993). However, previously proposed approaches for using the data require methods that are time- and space-intensive compared to standard random forests. We propose a simple strategy: “**compute the mean difference vectors**”. In other words, given a two-class problem, let $\hat{\delta} = \hat{\mu}_0 - \hat{\mu}_1$, where $\hat{\mu}_c$ is the estimated class conditional mean. Under a spherically symmetric class conditional distribution assumption, $\hat{\delta}$ is the optimal projection vector. When there are $C > 2$ classes, the set of all pairwise distances between $\hat{\mu}_c$ and $\hat{\mu}_{c'}$ is of rank $C - 1$. Because RerFs are approximately rotationally invariant, we can simply compute all the class conditional means, and subtract each from one of them (we chose the $\hat{\mu}_c$ for which n_c , the number of samples in that class, is the largest). Thus, we construct \tilde{X} by concatenating A^T with $\Delta = (\delta_{(2)} - \delta_{(1)}, \dots, \delta_{(C)} - \delta_{(1)})$, where $\delta_{(j)}$ is the δ vector for the class with the j^{th} largest number of samples, to obtain \tilde{A}^T . Then we compute $\tilde{X} = \tilde{A}^T \tilde{X}$. Computing this matrix is extremely fast, because it does not rely on costly singular value decompositions, matrix inversions, or convex problems. Thus, it nicely balances using the data to find good vectors, but not using much computational space or time. Furthermore, it also provides a set of dense projections to supplement the sparse projections of RerF. Denote RerFs that include this matrix RerF(d), and if they pass to ranks first, RerF(d+r).

Figure 5 demonstrates the utility of passing to ranks and using supervised projections on various transformations of the Trunk simulation. Panels A and B again show that RF and RerF are sensitive to rotation and therefore affine transformations. Panel C shows that RerF(d) achieves a lower error rate than RerF in the untransformed setting and is not sensitive to rotation. However, it is sensitive to scale and therefore affine transformations. Panel D shows that RerF(d+r) is robust to affine transformations, as desired. Panel E again shows that RotRF is sensitive to scale and

650
651
652
653
654
655
656
657
658
659

660 subsequently affine transformations.
 661
 662
 663
 664
 665
 666
 667
 668
 669

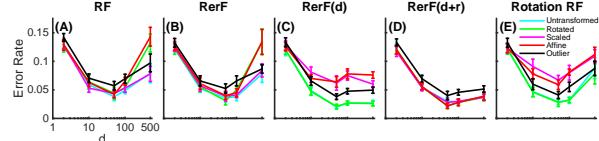

670 *Figure 5.* The utility of supplementing RerF with supervised
 671 projections and rank transforming the data prior to inducing trees (see
 672 section 4.5 for details). The effect of various transformations on
 673 classification performance of RF, RerF, RerF(d), RerF(d+r), and
 674 RotRF for the Trunk simulation are shown in panels A-E, respec-
 675 tively. Panel D shows that RerF(d+r), which supplements RerF
 676 with supervised projections, and passes the data to ranks, is
 677 robust to affine transformations.

5. Conclusion and Future Work

We have proposed novel methods for constructing decision forests, which we call RerFs. We view these methods as special cases of a more general random projection forest, which include Breiman’s original Forest-IC and Forest-RC, as well as previously proposed oblique decision forests. We have demonstrated in simulations that RerFs are especially well-suited for classification problems in which axis-parallel splits are suboptimal, and at the same time, have a large number of irrelevant features relative to relevant ones. This could explain RerF’s excellent empirical performance on a suite of over 100 benchmark datasets, as real data often has the properties just described. Moreover, RerF, unlike other oblique decision forests, preserves the time and space complexity of Forest-IC, and is only marginally sensitive to scaling. Lastly, we propose two additional modifications. One involves supplementing sparse random projections with a particular form of fast supervised projections in the construction of candidate split directions. The other involves passing the data to ranks with the goal of making the classifier more robust to outliers.

Much work is still to be done with our proposed methods. The simplicity of RerFs suggest that they will be amenable to theoretical investigation, extending the work of Biau et al. (2008) to the RerF setting (Biau et al., 2008). Moreover, we hope that theoretical investigations will yield more insight into which distributions $f_A(\mathcal{D}_n)$ will be optimal under different distributional settings, both asymptotically and under finite sample assumptions. Even under the currently proposed $f_A(\mathcal{D}_n)$, our implementation has room for improvement. Although it has the same space and time complexity as RF, we will determine explicit constants, and improve our implementation accordingly. Indeed, our current implementation is a proof-of-concept MATLAB

implementation. We will utilize recent GPU and semi-external memory methods to significantly speed up RerF (Zheng et al., 2015). As with all decision forests, multi-class classification is but one exploitation task they can be used for; therefore, we will also extend this work to enable regression, density estimation, clustering, and hashing. We will provide open source code to enable more rigorous and extended analyses by the machine learning community.

References

- Biau, G., Devroye, L., and Lugosi, G. Consistency of ran-
 715 dom forests and other averaging classifiers. *The Journal
 716 of Machine Learning Research*, 9:2015–2033, 2008.
 717
 Blaser, R. and Fryzlewicz, P. Random rotation ensem-
 718 bles. 2015. URL [http://stats.lse.ac.uk/
 719 fryzlewicz/rre/rre.pdf](http://stats.lse.ac.uk/fryzlewicz/rre/rre.pdf).
 720
 Breiman, L. Random forests. *Machine Learning*, 4(1):5–
 721 32, October 2001.
 722
 Caruana, R., Karampatziakis, N., and Yessenalina, A. An
 723 empirical evaluation of supervised learning in high di-
 724 mensions. *Proceedings of the 25th International Con-
 725 ference on Machine Learning*, 2008.
 726
 Dolan, E. D. and Moré, J. J. Benchmarking optimization
 727 software with performance profiles. *Mathematical Pro-
 728 gramming*, 91:201–213, 2008.
 729
 Fernandez-Delgado, M., Cernadas, E., Barro, S., and
 730 Amorim, D. Do we need hundreds of classifiers to solve
 731 real world classification problems? *Journal of Machine
 732 Learning Research*, 15(1):3133–3181, October 2014.
 733
 Heath, D., Kasif, S., and Salzberg, S. Induction of oblique
 734 decision trees. *Journal of Artificial Intelligence Re-
 735 search*, 2(2):1–32, 1993.
 736
 Ho, T. K. The random subspace method for constructing
 737 decision forests. *Pattern Analysis and Machine Intelli-
 738 gence, IEEE Transactions on*, 20(8):832–844, Aug 1998.
 739 ISSN 0162-8828. doi: 10.1109/34.709601.
 740
 Li, P., Hastie, T. J., and Church, K. W. Very sparse random
 741 projections. In *Proceedings of the 12th ACM SIGKDD
 742 international conference on Knowledge discovery and
 743 data mining*, pp. 287–296. ACM, 2006.
 744
 Menze, B. H., Kelm, B.M, Splitthoff, D. N., Koethe,
 745 U., and Hamprecht, F. A. On oblique ran-
 746 dom forests. In Gunopulos, Dimitrios, Hofmann,
 747 Thomas, Malerba, Donato, and Vazirgiannis, Michalis
 748 (eds.), *Machine Learning and Knowledge Discovery
 749 in Databases*, volume 6912 of *Lecture Notes in Com-
 750 puter Science*, pp. 453–469. Springer Berlin Heidel-
 751 berg, 2011. ISBN 978-3-642-23782-9. doi: 10.1007/
 752

770	978-3-642-23783-6_29.	URL http://dx.doi.org/10.1007/978-3-642-23783-6_29 .	825
771			826
772			827
773	Rodriguez, J. J., Kuncheva, L. I., and Alonso, C. J.	Rotation forest: A new classifier ensemble method.	828
774	<i>Pattern Analysis and Machine Intelligence, IEEE Transactions on</i> , 28(10):1619–1630, 2006.		829
775			830
776			831
777	Tan, P. J. and Dowe, D. L.	Mml inference of oblique decision trees.	832
778	In <i>AI 2004: Advances in Artificial Intelligence</i> , pp. 1082–1088.	Springer, 2005.	833
779			834
780			835
781	Trunk, G. V.	A problem of dimensionality: A simple example.	836
782	<i>Pattern Analysis and Machine Intelligence, IEEE Transactions on</i> , (3):306–307, 1979.		837
783			838
784			839
785	Zheng, D., Mhembere, D., Burns, R., Vogelstein, J. T.,		840
786	Priebe, C. E., and Szalay, A. S.	Flashgraph: Processing billion-node graphs on an array of commodity ssds.	841
787	In <i>13th USENIX Conference on File and Storage Technologies (FAST 15)</i> . USENIX Association, 2015.		842
788			843
789			844
790			845
791			846
792			847
793			848
794			849
795			850
796			851
797			852
798			853
799			854
800			855
801			856
802			857
803			858
804			859
805			860
806			861
807			862
808			863
809			864
810			865
811			866
812			867
813			868
814			869
815			870
816			871
817			872
818			873
819			874
820			875
821			876
822			877
823			878
824			879