



SHEET METAL PROCESSING MACHINES

VERSION 1, 2023



“WORKING AT THE CUTTING EDGE!” “IT’S IN OUR DNA”

For the ultimate result in deburring and edge rounding, and the perfect precision in surface treatment and stock removal, we always do that little bit extra.


Pushing the boundaries with regard to technology, innovative power and flexibility is in our DNA. This is one of the reasons why we are known as specialists in standard and custom-made work. Timesavers is the creative party that likes nothing better than taking a constructive approach and putting forward technically well-thought-out solutions with the best results. This working method suits us: we want to offer our customers added value, that's what motivates us and keeps us ahead!

TIMESAVERS HAS BEEN SETTING THE STANDARDS FOR YEARS NOW

Timesavers is the largest producer of wide abrasive belt equipment in the world with sites in Minneapolis (USA), Goes (the Netherlands) and Shanghai (China). With more than 80 years of experience and a huge customer base worldwide, we recognise like no other the need for and strength of constant development and innovation. We provide a total package to our customers with our technical solutions, international production, extensive application knowledge and unmatched after-sales support. This is all brought about by a dedicated team with a sharp focus on quality and customer satisfaction.

YOUR PRODUCT DESERVES TOP QUALITY

The Timesavers range is specialised abrasive equipment for the optimal processing of products made of steel, stainless steel, aluminium and zincor coated (including plastic films or embossed surfaces). Apart from these standard metal types, our machines can also process various types of stone, concrete, composites and special metals. Are you looking for perfection in deburring, edge rounding, finishing or precision grinding with the highest attainable quality and with an unmatched finish? Choose Timesavers.

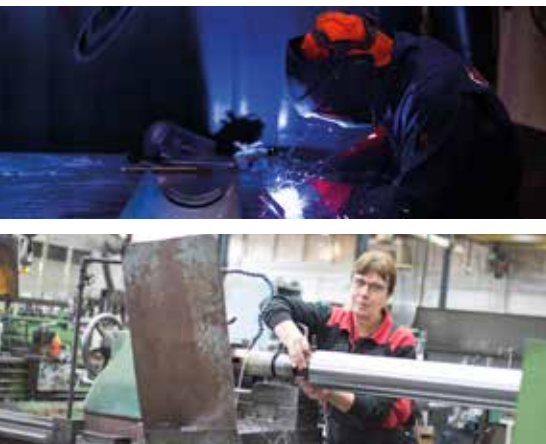

CREATIVITY AND TECHNOLOGY GO HAND-IN-HAND AT TIMESAVERS

We adhere to the principle that different options are required for different applications and there is nobody who offers a broader range of machines than Timesavers. In addition, Timesavers also develops and produces machines for special applications up to complete turnkey project solutions with various types of peripheral equipment. Timesavers thinks in terms of solutions and likes to meet your challenge with vigour and enthusiasm.

THE WORLD IS OUR PLAYING FIELD

More than 60,000 Timesavers' grinding machines have been sold worldwide of which a large number are still operational today. More than 100 factory-trained independent distributors are ready to give service worldwide. In addition, the organisation has a team of engineers who are stationed strategically and provide support. We will always know how to help you, regardless of where you may be in the world.





10
.....
SERIES



12
.....
SERIES



22
.....
SERIES



22
.....
RB SERIES



31
.....
SERIES



32
.....
RB SERIES



42
.....
RB SERIES



62
.....
SERIES



71
.....
SERIES



72
.....
SERIES




81
.....
SERIES

Table of contents

Deburring Edge rounding Finishing Precision grinding Laser oxide removal Heavy slag removal

DEBURRING EDGE ROUNDING									
10 series	page 8	o	o	o					
12 series	page 10	o		o					
22 series	page 12	o	o	o				o	
22 RB series	page 14	o	o	o		o			
31 series	page 16	o		o					
32 RB series	page 18	o	o	o		o		o	
42 RB series	page 20	o	o	o		o		o	
STAINLESS STEEL FINISHING									
62 series	page 24			o					
71/72 series	page 26			o					
PRECISION GRINDING									
81 series	page 28			o	o				
TOOLING									
Spare parts: Consumables	page 33								
Brushes	page 34								
Belts	page 40								
Spare parts: Handling	page 41								
Tables	page 42								
Dust extractor	page 44								

TIMESAVERS: THE BEST WHEN IT COMES TO SHEET METAL PROCESSING MACHINES



DEBURRING WITH A TIMESAVERS DEBURRING MACHINE

Deburring is the removal of irregularities and sharp edges on metal products. They are often caused by machining work such as laser, water jet, punched or plasma cutting. Discover Timesavers' broad machine line for effective and efficient deburring.




ARE YOU LOOKING FOR THE MOST BEAUTIFUL AND BEST EDGE ROUNDING OF METAL?

A radius is created on the edge of the metal during edge rounding of metal products. This ensures that the sharpness of the edge is removed and it is given a uniform rounding. Timesavers offers perfection in edge rounding with a radius of up to 2 mm in a single pass.




GET THE BEST FINISH WITH TIMESAVERS

Surface finishing applies to, for example, stainless steel and aluminium in several versions: a hairline, a brush and a grain finish. Timesavers offers a wide range of quality finishing machines with abrasive belts and brushes.



PRECISION GRINDING WITH TIMESAVERS' INNOVATIVE GRINDING TECHNOLOGY

Surplus material such as the oxide layer is removed from metal products through surface grinding when you apply precision grinding. Timesavers is the expert in precision grinding where tolerances of up to 0.02 mm can be achieved.



REMOVAL OF LASER OXIDE SKIN

Oxide skin occurs on metal and stainless steel when laser cutting using oxygen, and it must be removed for subsequent coating processes or welding. Timesavers has developed a perfect solution for the removal of laser oxide, both from the surface, as well as from the sides of the product.



EASY REMOVAL OF HEAVY SLAG

Slag occurs when metal melts because of, for example, autogenous and plasma cutting. Slag removal requires a special approach for which Timesavers offers the ultimate solutions.



















12-42

SERIES

OVERVIEW POSSIBLE MACHINE CONFIGURATIONS

Possible machine configurations for the 12 till 42 RB series machines to deburr, round edge, finish, remove laser oxide or remove heavy slag.



W - Wide belt **RB** - Rotary Brush **H** - Hammerhead
B - Brush **MD** - Multi Disc

TIMESAVERS OFFERS A PREMIUM SOLUTION TO EVERY SPECIFIC NEED

THE 10 SERIES MANUAL GRINDER

The 10 series is Timesavers' versatile starter model and the cost saving alternative for manual deburring, edge rounding and finishing of metal.

The manual grinder for fast deburring, edge rounding and finishing of metal

This versatile machine has two heads: an easy to change grinding pad an a brush. The different kind of brushes can take care of deburring, edge rounding, finishing, laser oxide removal and heavy slag removal. Also, mirror finish can be created if required. Thanks to the 180 degrees rotating shaft, it is easy to rapidly switch between different consumables.

The manual grinder is ergonomically responsibly designed for optimal operating conditions

The machine has a special tabletop with a high friction surface to fix the parts during processing. Smaller parts are kept fixed in their place through the integrated vacuum.

Link the operating ease of the manual grinder to an increased production capacity

Get information from Timesavers' experts. They will gladly provide good advice.



Available configurations (mm):

MG 1300 x 880

Specifications:

Number of heads	2
Head types	disc, brush
Disc/brush diameter	150 mm
Rotating grinding heads	180°

Specifications:

Table	1300 x 800 mm (960 mm working height)
Vacuum area	260 x 310 mm
Maximum thickness of a part	100 mm
Power supply	400 Volt / 2.5 kW / 11.6 A
Applications	deburring, edge rounding, laser oxide removal, slag removal, finishing





STANDARD VERSION WITH VACUUM:

- + 2-position movable arm with weight compensation.
- + Starter set to process different materials.
- + Grinding dust is collected in an easy-to-clean container.
- + Frequency controlled drive.
- + Worktable 1300 x 800 mm.
- + Weight approx. 270 kg.
- + Vacuum table size 260 x 310 for small parts.
- + 0.75 kW main motor.
- + Height-adjustable side guards for personal protection and machining of larger parts.
- + CE-certified.
- + 400 Volt/50 Hz connection with plug.

APPLICATIONS AND BENEFITS:

- + Reduction in consumables costs by long-life brushes.
- + 3 - 4 times faster compared to deburring by hand.
- + Even deburring and edge rounding.
- + Affordable entry-level model.
- + Wheels for easy movement.
- + Optimal user-friendliness.

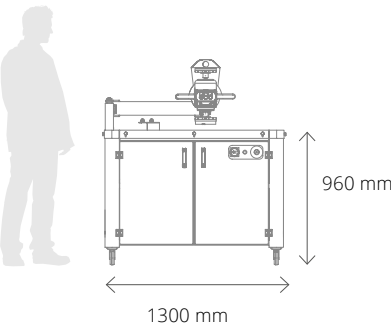

12 SERIES FOR DRY DEBURRING AND FINISHING OF SMALL PARTS

Timesavers' deburring machine 12 series has been the standard in the metal industry for more than forty years. Thousands of these economically attractive deburring machines are being used worldwide for the deburring and finishing of small parts.




The 12 series is available in a 600 mm working width

This dry working deburring machine with a 600 mm wide conveyor belt is available with an abrasive belt and/or brush for efficient deburring and finishing.

Efficiency and ease of use

Operation of all Timesavers machines is ergonomic and intuitive. The 12 series are perfect examples of this. Please feel free to ask for more information.

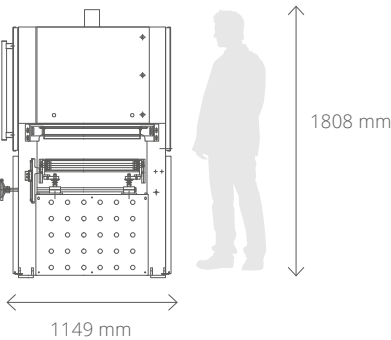

STANDARD VERSION:

- + Electric table height adjustment 1 - 125 mm.
- + Digital thickness readout in mm, on display.
- + Throughput speed W: 3 - 9 m/min | WW+WB: 1.5 - 9 m/min.
- + CE-certified.

APPLICATIONS AND BENEFITS:

- + Removal of vertical burrs from punched, laser and waterjet-cut parts.
- + Stainless steel, steel, aluminium, copper, etc.
- + Pre-grinding of heavy burrs and finishing in one pass on machine with multiple heads.
- + Option of edge breaking and fine grinding with a brush.
- + Optimal ease of operation.

Available configurations (mm):

W	600
WW	600
WB	600

Specifications:

Number of heads	1 - 2
Head types	roller, brush
Working width	600 mm
Main drive motor	5 or 7.5 kW

Specifications:

Transport speed	3 - 9 and 1.5 - 9 m/min
Abrasive belt length	1525 mm
Contact roller diameter	150 mm
Applications	deburring, finishing



THE 22 SERIES FOR DRY DEBURRING AND PERFECT FINISHING OR HEAVY SLAG REMOVAL

The 22 series is suitable for the dry finishing and deburring of metal. This versatile machine is available in three nominal widths: 900 mm, 1050 mm and 1280 mm. It can be equipped with a total of three heads for several applications.

Reduction of costs and an increase in efficiency

By combining an abrasive belt and a brush, products can be deburred and rounded in one pass. The machine is made for deburring and edge rounding of laser cut parts while incurring low user costs. The multi disc head which consists out of six deburring brushes which rotate against each other can create a large rounding and nice finish.

Effective removal of heavy slag

The Hammerhead is specially developed for fast removal of heavy slag on plasma and flame cut steel. As an option, the machine can have a wide belt grinding head behind the Hammerhead for edge breaking and further deburring.

For more information ask your Timesavers' expert.



Available configurations (mm):

H	900			
W	900	1050		1280
HW	900			
WB	900	1050	1280	
WW	900	1050	1280	
WWB	900	1050	1280	
WMD	900	1050		
WMDMD	900	1050		

Specifications:

Number of heads	1 - 3
Head types	wide belt, brush, multi disc, hammerhead
Working width	900, 1050, 1280 mm
Abrasive belt length	1900, 2620 mm




STANDARD VERSION:

- + Table mounted on four synchronous spindles.
- + Digital thickness readout in mm, on display.
- + Frequency controlled transport motor, 2.5 - 14 m/min.
- + Automatic table height adjustment 1 - 125 mm.
- + Electronic oscillation.
- + Dust extraction hoods and connections on top.
- + CE-certified.

APPLICATIONS AND BENEFITS:

- + Removal of vertical burrs from punched, laser and waterjet-cut parts.
- + Stainless steel, steel, aluminium, copper, etc.
- + Deburring and surface finishing in one throughput when using multiple heads.
- + Edge breaking by means of cylindrical Nylon web brushes (B), flap brushes (B) or small brushes (MD).
- + Removing metal dross with the hammerhead (H).
- + Grinding or brushing for making a finish.
- + Very low operating costs and high production capacity.

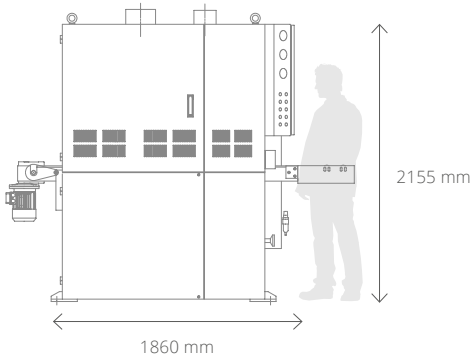

Specifications:

Table opening	1 - 125 mm
Transport speed	2.5 - 14 m/min
Contact roller diameter	150, 200 mm
Applications	deburring, edge rounding, slag removal, finishing



THE MOST COMPACT ROTARY BRUSH MACHINE

The 22 RB series is the most compact dry operating machine for deburring, edge rounding, finishing, and/or laser oxide removal of various sheet metal parts.

The ideal machine for companies with a smaller capacity requirement, but still requiring the popular features of the 32 RB and 42 RB series

This machine enables customers with smaller production demand and corresponding budget to deburr, edge round and finish parts perfectly.

Reliable and uniform deburring and edge rounding results due to an automated process

Ergonomically demanding and dirty work such as grinding and manual edge rounding can be cost-efficiently automated with the 22 RB series. As market demand for consistent and repeatable grinding, deburring and edge rounding increases, the 22 RB series is the ultimate machine to help your company improve these processes to the highest standards.

Constant results thanks to smart software and sensors

The machine is equipped with Siemens PLC and HMI, allowing the process and parameters to be adjusted automatically. Unique in this machine segment is that the 22 RB series is suitable for the use of Cobots and integration in an Industry 4.0 / Smart Industry software platform.

Let one of our Timesavers experts advise you.



Available configurations (mm):

WRB	600
WRBW	600

Specifications:

Number of heads	2 - 3
Head types	wide belt, rotary brush
Working width	600 mm
Main drive motor	7.5 kW
Number of brushes	4 (quick change brush system)

Specifications:

Table opening	1 - 100 mm
Transport speed	0.5 - 8 m/min
Brush diameter	300 mm
Contact roller diameter	150 mm
Applications	deburring, edge rounding, laser oxide removal, finishing





STANDARD VERSION:

- + Machine working width of 600 mm.
- + Efficient ergonomic operation through user-friendly TP900 Siemens HMI.
- + Vacuum table for processing small products (50 x 50 mm).
- + Vacuum table with an integrated automatic cleaning cycle.
- + Frequency controlled motors (roller and brushes) for flexibility during the process.
- + Easily changeable brushes.
- + Various brush types are available for multifunctional use of materials.
- + Adjustable table height 1 - 100 mm.
- + Product overthickness protection.
- + Transport speed from 0.5 - 8 m/min.
- + Two additional potentiometers for adjusting the transport and brush speed.
- + CE-certified.

APPLICATIONS AND BENEFITS:

- + Very compact rotary brush machine.
- + The brush contact distance of 850 mm.
- + The four brushes have a total of 12 m² of abrasive material.
- + Low tooling costs and very low energy consumption.
- + Maximum user-friendliness and an optimal process visibility.
- + Removal of burrs on laser-cut, waterjet-cut and punched products.
- + Processable materials: stainless steel, steel, aluminium, copper etc.
- + Removal of large burrs, laser oxide and finishing of surfaces in one pass.
- + Edge rounding and finishing of metal with brushes.
- + Removal of oxide skin with metal wire brushes.

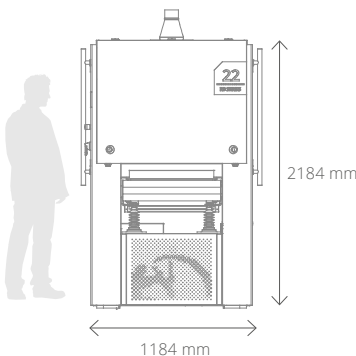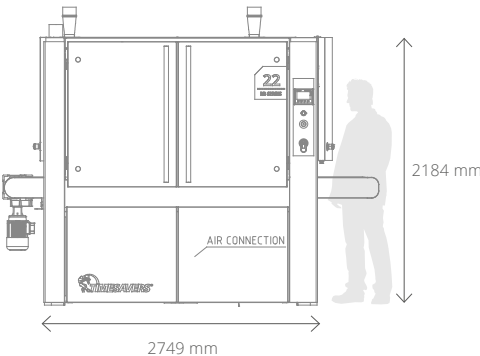

THE 31 SERIES FOR WET DEBURRING AND FINISHING

The 31 series deburring and finishing machine is available in a width of 450 mm and 900 mm. The machine is suitable for deburring and finishing of heat sensitive materials.



Two widths and innumerable possibilities

The 31 series could be equipped with a powerful grinding belt and a brush head and therefore it is the ideal machine for grinding and finishing square pipes and sheet metal.

The 31 series, a complete Timesavers' machine

This complete machine has an integrated coolant filter system to cool the metal products during machining. This ensures that the abrasive belt's service life is extended. The wet-working system uses filter paper to filter the coolant before it is recirculated. An integrated dryer dries the metal products while they are exiting the machine.

Optimum machining process in combination with ease of use

The 31 series is the ultimate machine for fast and efficient deburring and finishing. The machine can be easily operated thanks to a clear control panel. The finishing level is one of the reasons why the 31 series is so popular. Ask our experts for more information.



Available configurations (mm):

W	450	900
WB	450	900
WW	450	900
WWB	450	900
WBB		900

Specifications:

Number of heads	1 - 3
Head types	wide belt, brush
Working width	450, 900 mm
Main drive motor	7.5, 11 or 15 kW
Abrasive belt length	1525, 1900 mm




STANDARD VERSION:

- + Built-in cleaning filter and recirculation pump.
- + Transport table with a fixation system.
- + Automatically adjustable table opening. 450 wide: 1 - 200 mm | 900 wide: 1 - 150 mm.
- + Digital thickness readout in mm, on display.
- + Transport speed from 2.5 - 14 m/min.
- + Integrated drying with air knives and squeeze rollers.

APPLICATIONS AND BENEFITS:

- + Removing burrs on laser-cut, waterjet-cut and punched metal parts.
- + Suitable for stainless steel, steel, aluminium, titanium etc.
- + Deburring and finishing of surfaces in one pass.
- + Processing with abrasive belt and possibly brush.
- + Optimal production process and ease of use.

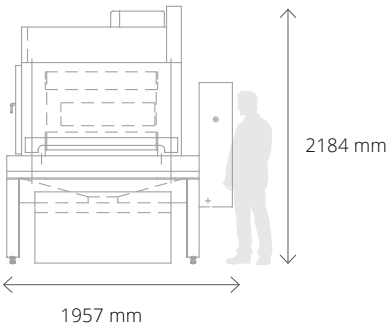

Specifications:

Table opening	1 - 150 mm (900 mm), 1 - 200 mm (450 mm)
Height of fixed table	980 mm
Transport speed	2.5 – 14 m/min
Brush diameter	150 mm
Contact roller diameter	150 mm



32

RB SERIES

THIS COMPACT, VERSATILE MACHINE OFFERS THE PERFECT PRICE-PERFORMANCE RATIO

The 32 RB series is the compact dry operating machine for deburring, edge rounding, laser oxide removal and finishing of different materials.



2MM
RADIUS

The 32 RB series has been developed based on the Red Dot Award-winning 42 RB series and is equipped with Timesavers' much-vaunted RB technology

The machine forms the new standard in deburring, edge rounding and finishing technology for a broad range of materials. The rotary brush unit is equipped with a carousel with four large brushes that work the entire working width and ensure an all-round rounding result on the workpieces.

Very small parts can be machined due to the use of a vacuum table


Much attention has been paid to the ease of use and user comfort with regard to this stylish and efficient deburring and finishing machine. A result is a machine that can be operated intuitively and easily. In addition, consumable use is low, the machine is energy efficient and the price-quality ratio is optimal. The machining process can be easily observed because of the angled control panel and the large windows.

Remove slag from small and large products

It is also possible to equip the 32 RB series with the hammerhead. Thanks to the vacuum table for large parts and the magnetic track for small parts, the machine can be widely used.

The ultimate deburring and finishing machine

Our innovative high-quality deburring and rounding technologies ensure that the latest deburring machine from the Timesavers 32 RB series is the perfect machine for the metal machining industry. Let one of our Timesavers experts advise you.

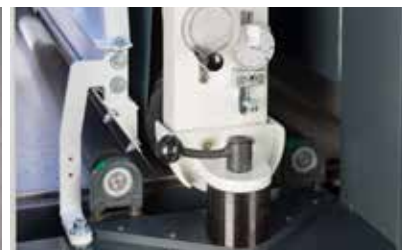

Available configurations (mm):

		Specifications:	
RB	1100	Number of heads	1 - 3
WRB	1100		
RBW	1100	Head types	wide belt, rotary brush, hammerhead
WRBW	1100	Working width	1100 mm
WWRB	1100	Main drive motor	7.5 kW
HWRB	1100	Number of brushes	4 (quick change brush system)





STANDARD VERSION:

- Machine working width: 1100 mm.
- Efficient ergonomic operation through user-friendly Siemens HMI (positioned at 45° for a good overview of the treatment process).
- Vacuum table for processing small products (50 x 50 mm).
- Vacuum table with an integrated cleaning cycle.
- LED bar on the input side indicating the machine status.
- Frequency controlled motors (roller, brush and carousel) for flexibility during the process.
- Product overthickness protection.
- Easily changeable brushes.
- Various brush types are available for multifunctional use of materials.
- Adjustable table opening 1 - 100 mm.
- Product overthickness protection.
- Transport speed from 0.2 - 8 m/min.
- CE-certified.

APPLICATIONS AND BENEFITS:

- Compact rotary brush machine.
- Brush contact distance of 1300 mm.
- The four brushes have a total of 28 m² of abrasive material.
- Removal of burrs on e.g. laser-cut, waterjet-cut, punched products, etc.
- Processable material: stainless steel, steel, aluminium, copper etc.
- Removal of burrs, edge rounding, laser oxide and slag removal, and finishing of surfaces in one pass.
- Edge breaking and finishing with abrasive flap brushes.
- Removal of oxide skin with metal wire brushes.
- Low tooling costs and very low energy consumption.
- Maximum user-friendliness and an optimal observation process.

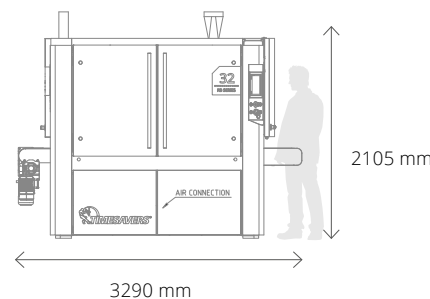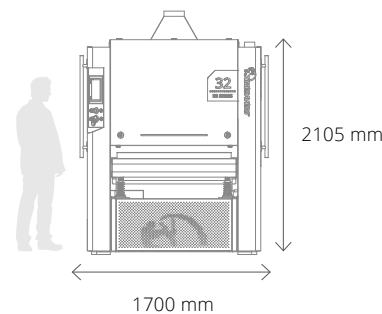

Specifications:

Table opening	1 - 100 mm
Transport speed	0.2 - 8 m/min
Brush diameter	350 mm
Contact roller diameter	150 mm
Applications	deburring, edge rounding, laser oxide removal, heavy slag removal, finishing



42 RB SERIES FOR ULTIMATE DEBURRING, FINISHING, EDGE ROUNDING, LASER OXIDE AND HEAVY SLAG REMOVAL

Discover the ultimate machine for uniform deburring, edge rounding and finishing of your product(s). Read everything about Timesavers' 42 Rotary Brush (RB) series below. This is the most popular and award winning Timesavers machine.



2MM
RADIUS

This machine has been developed for people who want only the best

The 42 RB series offers the solution for manufacturers who supply premium quality products. This top quality is achieved through a multi-rotating brush machine with eight abrasive flap brushes that deburr uniformly and round the edges of the metal perfectly. This makes it possible to achieve a radius of 2 mm on mild steel and even more on softer material like aluminium.

The Timesavers Rotating Brush Machine

This deburring machine can also be provided with one or more abrasive belt heads to perfectly remove very large burrs and guarantee the desired finish. The machine is suitable for machining punched, laser-cut and plasma-cut parts and even 3D and milled parts with deep pockets. With the use of a standard vacuum table with automatic vacuum control it is possible to process small parts (from 50 mm) as well as large parts of up to 1600 mm. The materials that can be machined include stainless steel, aluminium, zincor, zinc and laser film products. Available in this machine segment is the use of Cobots and integration in an Industry 4.0 / Smart Industry software platform.

Do you want to know more about the Timesavers Rotating Brush Machine and its performance?
Contact Timesavers' experts for professional advice.



Available configurations (mm):

				Specifications:	
RB	1350	1600		Number of heads	1 - 4
WRB	1350	1600		Head types	rotary brush, wide belt, hammerhead
RBW	1350	1600		Working width	1350, 1600 mm
WRBW	1350	1600		Main drive motor	28 - 75 kW / 67 - 180 A
WWRB	1350			Number of brushes	8 (quick to change brush system)
WWRBW	1350				
HWRB	1350	1600			




STANDARD VERSION:

- + Ergonomic positioned and user-friendly control panel (located at 45° for a good overview of the treatment process).
- + Motorised adjustable table opening from 1 - 100 mm.
- + Product overthickness protection.
- + Rotating brush carousel equipped with four counterclockwise and four clockwise rotating brushes.
- + Frequency-controlled grinding heads and a conveyor belt with an adjustable feed speed of 0.2 - 8 m/min.
- + Product overthickness protection.
- + Window doors, illuminated interior and optional camera's for process observation.
- + Brushes with an extremely long service life of up to 3000 hours.
- + LED bars on the input and output to indicate machine status.
- + Available with 1, 2, 3 or 4 heads.
- + Vacuum table with an automatic cleaning cycle.
- + Quick change system for brushes and belts.
- + CE-certified.


APPLICATIONS AND BENEFITS:

- + The brush contact distance of 42 RB series is 1750 mm.
- + The eight brushes have a total of 53 m² of abrasive material.
- + Processing of mixed materials with optional wet dust extraction.
- + Treatment of small parts (50 x 50 mm) possible with the standard vacuum table.
- + Removal of burrs that are caused by laser, plasma or water jet cutting and embossed parts in one go.
- + Flat, formed and 3D parts with protrusions.
- + Preliminary removal of large burrs and finishing of surfaces.
- + Stainless steel, mild steel, aluminium, copper, etc.
- + Deburring Zintec, galvanised and plated material.
- + Use of Cobots integration in an Industry 4.0 / Smart industry software platform.

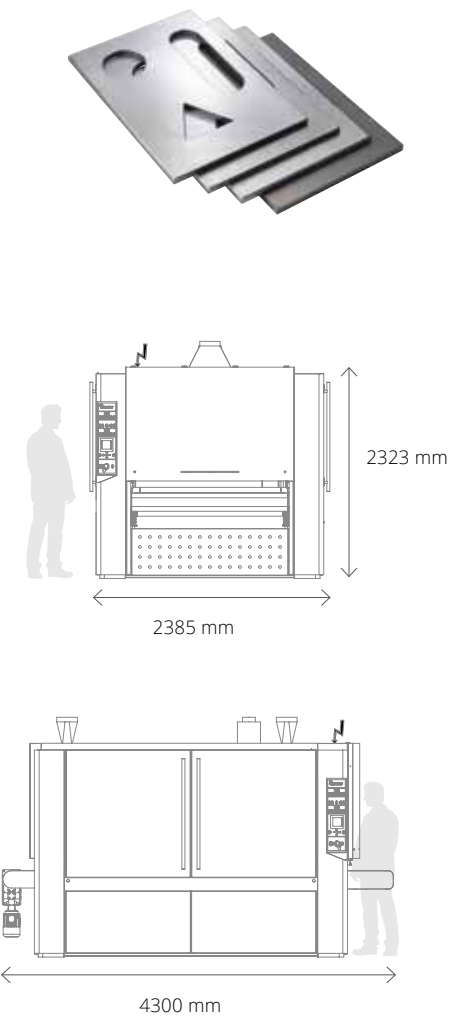

Specifications:

Table opening	1 - 100 mm
Transport speed	0.2 - 8 m/min
Brush dimensions	530 x 350 mm
Contact roller diameter	180, 280 mm
Applications	deburring, edge rounding, laser oxide removal, heavy slag removal, finishing



ALL OPTIONS OF THE 42 RB SERIES LISTED CONVENIENTLY FOR YOU

These pages provide insight into the possibilities of the 42 RB series. Timesavers has listed all heads including the application possibilities for you.



Regardless of what your requirements or preferences may be: Timesavers has the solution
Timesavers serves customers in many industries and sectors and strives to achieve the greatest flexibility in several areas. Timesavers' customers can count on: quality, service and innovative and problem-solving capacity. Therefore, always contact Timesavers if you want to exchange ideas and discuss your requirements with regard to perfect deburring, edge rounding and finishing. Our professional experts will help you further.

- + Perfect edge rounding (radius of up to 2 mm).
- + Low tooling costs.
- + Different thicknesses can be machined simultaneously.
- + Suitable for different materials such as stainless steel, aluminium, Zintec, etc.
- + Suitable for deburring small (50 mm) and large parts.
- + Can be integrated into an (existing) production process.



+ Deburring




+ Finishing



+ Edge rounding




+ Slag removal

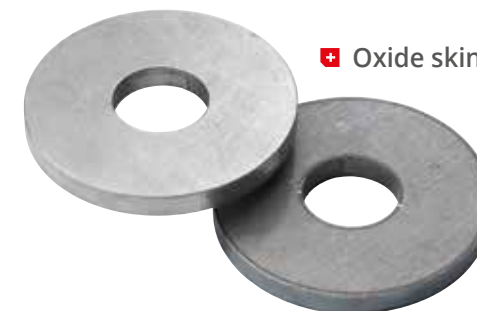


+ Oxide skin removal

RB

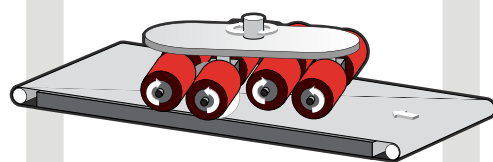

- + Deburring
- + Edge rounding
- + Laser oxide removal

WRB

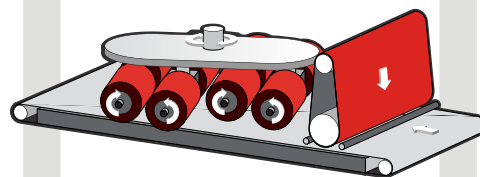


- + Deburring
- + Edge rounding
- + Laser oxide removal

EXTRA HEAD FOR:

- + Pregrinding

WRBW

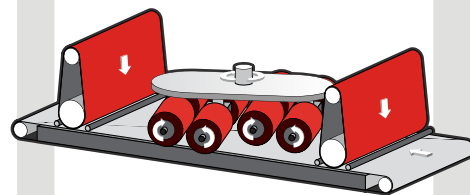


- + Deburring
- + Edge rounding
- + Laser oxide removal

EXTRA HEAD FOR:

- + Pregrinding
- + Finishing

WWRB

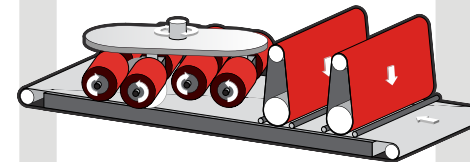


- + Deburring
- + Edge rounding
- + Laser oxide removal

EXTRA HEAD FOR:

- + Pregrinding
- + Large burr removal

WWRBW

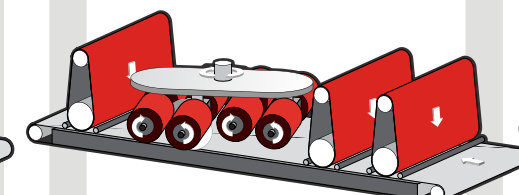


- + Deburring
- + Edge rounding
- + Laser oxide removal

EXTRA HEAD FOR:

- + Pregrinding
- + Large burr removal
- + Finishing

HWRB

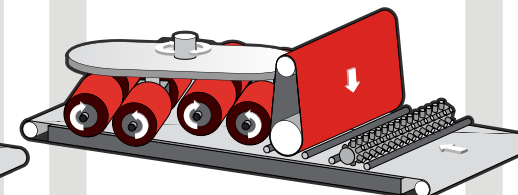

- + Deburring
- + Edge rounding
- + Laser oxide removal

EXTRA HEAD FOR:

- + Pregrinding
- + Large burr removal

THE 62 SERIES: FOR FINISHING COLD ROLLED STAINLESS STEEL SHEETS

The 62 series offers a full solution for finishing stainless steel sheets. Two different working widths are available: 1350 mm and 1600 mm.



Perfect finishing including thin sheet material from 0.4 mm (optional)

The 62 series machine can be fitted with one or more heads and therefore you can achieve a no. 3, no. 4 and duplo finish in one machine.

A duplo finish can be achieved using a grinding belt followed by a Scotch-Brite brush that will produce an additional fine surface. Very thin sheets can be ground and finished because of the special construction of the roller table.

In addition to the standard machine, we also offer turnkey solutions

We can also supply the ancillary equipment. Timesavers organises, installs, instructs and provides a perfect working machine-line. Examples include:

- + Roller conveyors and tables.
- + Automatic stacking/de-stacking units.
- + PVC-coating machines.
- + Dust extractors for dry grinding machines.

Do you want to know more about this Timesavers machine and our service?

Contact Timesavers' experts for professional advice.



Available configurations (mm):

WWB	1350	1600	Specifications:	Number of heads	1 - 3
WW	1350	1600			
WB	1350	1600			
BB	1350	1600			
			Specifications:	Head types	wide belt, brush
			Specifications:	Working width	1350, 1600 mm




STANDARD VERSION:

- + Centrally programmable HMI Siemens control panel.
- + Wide belt grinding heads with a fine adjustment of the contact rollers (diameter of 220 mm).
With frequency controlled main motors for all possible finishes.
- + Scotch-Brite brush heads with fast oscillation of up to 700 strokes per minute: frequency controlled main motor, brush outer diameter of 350 mm, motorised height adjustment with quick exchange brush system.
- + Roller table construction with hardened steel counter roller under the contact roller for finishing thin sheets from 0.4 mm (need of an additional package).

APPLICATIONS AND BENEFITS:

- + No. 3 or no. 4 finishing with abrasive belts from grit 120, 180 to even 240 and 320.
- + Brush / microlon finishing with Scotch-Brite brushes or with Scotch-Brite belts.
- + Duplo finish; a combination of finishing with grinding belts and Scotch-Brite brush(es).
- + Can be purchased as a turnkey project.

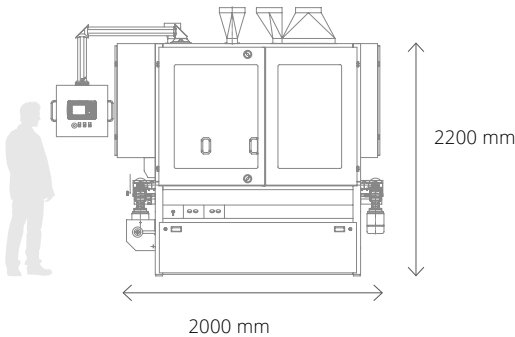

Specifications:

Table opening	1 - 50 mm
Transport speed	4 - 20 m/min
Brush diameter	350 mm
Adjustable contact roller diameter	220 mm
Applications	grinding, finishing of stainless steel sheets

+ Duplo finish

+ Microlon finish

+ No. 4 finish

THE 71/72 SERIES: A COMPLETE 'COIL-TO-COIL' LINE: WET OR DRY

In addition to top working machines, bottom working machines can be integrated in the production line. Finishing of cold & hot rolled sheets is also possible with this machine.



We offer our 71/72 series for finishing of sheet material rolls

The machine has a production speed of up to 30 m/min and delivers a perfectly finished end result. The 71/72 series has been developed to perform: day-in, day-out, year-in and year-out.

Timesavers provides advice, delivers, installs and offers backups

If required we can deliver turnkey projects that can include, for example, a leveling machine, decoiler, coiler, a PVC-coating machine, roller tables and/or stackers.

With experienced support from the design phase up to and including delivery. Additional examples include:

- + Dust extractors for dry finishing machines.
- + Water filter units for wet finishing machines.
- + In other words a complete 'coil-to coil' finishing line.

Do you want to know more?

Contact the Timesavers experts.

Available configurations (mm):

WW	1350	1600	2100
WB	1350	1600	2100
BB	1350	1600	2100

Specifications:

Number of heads	1 - 2
Head types	wide belt, brush, hairline
Working width	1350, 1600, 2100 mm



+ Hairline finish

STANDARD VERSION:

- + Centrally programmable HMI Siemens control panel.
- + Wide belt grinding heads with a fine adjustment of the contact rollers (diameter of 280 mm). With frequency controlled main motors for all possible finishes.
- + Hairline finishing machine with endless grinding belt for ease of operation and perfect straight line.
- + Scotch-Brite brush heads with fast oscillation of up to 500 strokes per minute: frequency controlled main motor, brush outer diameter of 400 mm, motorised height adjustment with quick exchange brush system.
- + Roller table construction with hardened steel counter roller under the contact roller for finishing thin sheets from 0.5 mm.
- + 71 series wet and 72 series dry.

APPLICATIONS AND BENEFITS:

- + Coil-to-coil.
- + Sheet to sheet; both hot and cold rolled.
- + No. 3 or no. 4 finishing with abrasive belts from grit 120, 180 to even 240 and 320.
- + Brush / microlon finishing with Scotch-Brite brushes or with Scotch-Brite belts.
- + Duplo finish; a combination of finishing with grinding belts and Scotch-Brite brush(es).
- + Long scratch hairline finishing; a finish often favoured in the Far East.
- + Can be purchased as a turnkey project.

+ Duplo finish

+ Microlon finish

+ No. 4 finish

Specifications:

Table opening	1 - 50 mm
Transport speed	0 - 30 m/min
Brush diameter	400 mm
Adjustable contact roller diameter	280 mm
Applications	grinding, finishing of stainless steel sheets or coils

THE 81 SERIES: THE INNOVATIVE SOLUTION FOR PRECISION GRINDING



The Dutch build 81 series machine is Timesavers’ innovative solution for precision metal grinding.

Precision grinding up to 0.02 mm? No problem with the Timesavers 81 series

This machine uses wide grinding belts with a tight tolerance and is used for the precision grinding of titanium, molybdenum, stainless steel, aluminium/nickel alloys, carbon steel and more. The machine grinds these metals with a precision of no less than 0.02 mm.


The Timesavers precision grinding machine: totally tailor made

Every variant from the 81 series is produced especially based on customer requirements. Precision grinding is performed by a wide belt that grinds the thickness of a part to achieve a fixed thickness. The Timesavers 81 series has a conveyor belt, a roller table or a reciprocating table, coupled with high grinding power to make this precision grinding possible. All executions in this machine range will have air knives to keep the coolant in the machine. In addition to this, a mist filter will remove small coolant particles out of the air. The machine is executed with servo drives for accurate positioning.

Timesavers offers know-how and a far-reaching service

We also, for example, offer turnkey solutions where the handling of all ancillary equipment is organised and installed for you. Examples include:

- + Roller conveyor and tables.
- + Automatic stacking and de-stacking units.
- + Coolant filter units for wet grinders.
- + Turnover unit.

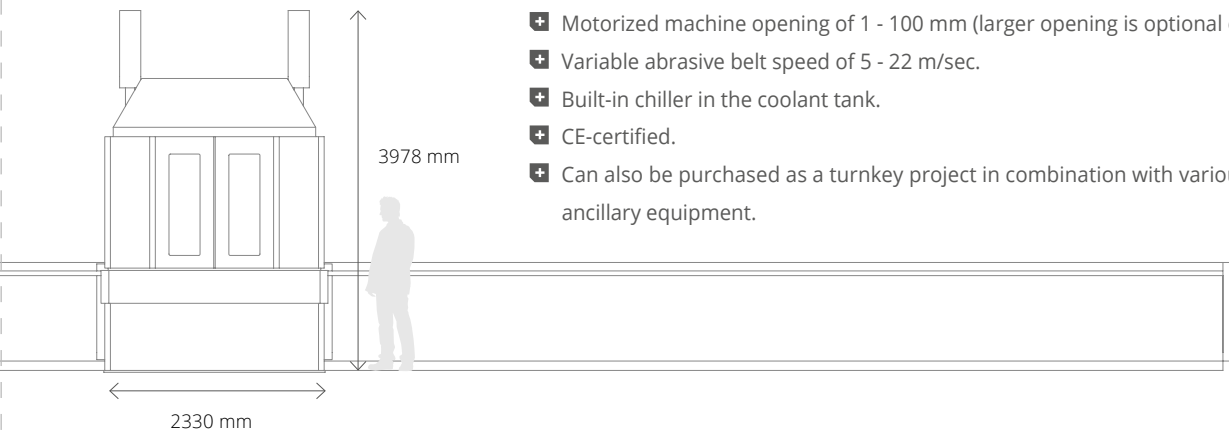

STANDARD VERSION:

- + Precision grinding of titanium, molybdenum, stainless steel, nickel/aluminium alloys, and carbon steel.
- + Grinds material to a predetermined thickness: flat, tapered or U shaped.
- + Removes up to 0.2 mm per grinding stroke depending on the material.
- + Accuracy of +/- 0.02 mm.
- + Suitable for materials with thicknesses of 0.25 mm to 100 mm.
- + Central control panel mounted on the machine or as a desk.
- + Siemens HMI with pre-programmable settings.
- + Integrated belt optimization program for maximum use of the grinding belt capabilities.
- + Possibility to grind in both directions.
- + Wet version with integrated spray to separate dirt and fine dust.
- + Integrated vacuum system with safety features.
- + One or more vacuum segments that can be operated individually.
- + Quick exchange system for the grinding belt.
- + Motorized machine opening of 1 - 100 mm (larger opening is optional on request).
- + Variable abrasive belt speed of 5 - 22 m/sec.
- + Built-in chiller in the coolant tank.
- + CE-certified.
- + Can also be purchased as a turnkey project in combination with various types of ancillary equipment.

Available configurations (mm):

W	600	1000	1600	2100	2600
WW	600	1000	1600	2100	2600
WB	600	1000	1600	2100	2600
BB	600	1000	1600	2100	2600

Specifications:

Number of heads	1 - 2
Head types	wide belt, brush
Working width	600, 1000, 1600, 2100, 2600 mm

Specifications:

Table opening	1 - 100 mm
Transport speed	1 - 10 m/min
Applications	precision grinding



81 SERIES TABLE EXECUTIONS




Conveyor belt

Precision grinding can be done with a transport speed of 0.1 up to 10 m/min when using a conveyor belt. Optional is a transport feed from 0.1 up to 20 m/min. Besides that, the conveyor belt is oil and heat resistant. Plates could have a minimum thickness from 0,8 mm up to a maximum thickness of 100 mm.

The conveyor belt is specially used when you have thicker material and when the material is not totally straight in length direction. The conveyor belt will give support for the low spots and the end result will be a homogeneous finish. The material will reciprocate during the grinding process over the conveyor belt and the grinding will be done in both directions to get maximum stock removal per cycle.

- + Also capable of grinding material with various shapes.
- + Accuracy of +/- 0.07 mm.
- + Specially produced for sheet and plate material and has to be connected to infeed and outfeed tables.

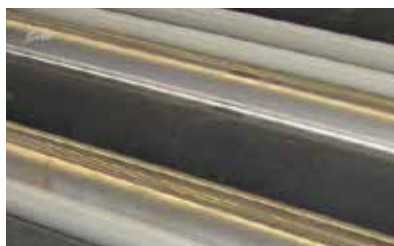

Roller table

The roller table is executed with hardened steel Billy Rollers which guarantee a very constant grinding result. The minimum thickness of a plate could be 0.4 mm up to a maximum thickness of 20 mm. The material must be level in both length and width before grinding if the material is thicker than 4 mm. The billy rollers make sure that there is a constant pressure under the full width of the material, resulting in a homogeneous finish and an accuracy of +/- 0.05 mm.

- + Can be used for both sheets and coils when the machine is connected to in and outfeed tables or to coil equipment.


Reciprocating table

By using a reciprocating table the most precise grinding can be reached. Possible for very thin plates with a minimum thickness of 0.25 mm up to plates with a maximum thickness of 100 mm. The product stays perfectly in place due to the vacuum system or the magnetic chuck. The table will have integrated channels on the side to remove swarf and coolant from the grinding area to the filter system.

The vacuum chuck mounted on top of the reciprocating table has multiple suction holes to accommodate one or multiple parts. The groove pattern can be adapted for the customers' needs. With the optional hydro pins, the plates can be either taken off with a sling or with a vacuum lifter.

- + The table can also be executed with a magnetic chuck if the parts are from steel. This is an electro-permanent magnet to avoid heat production and to guarantee an accurate result.
- + The accuracy of this type of table is +/- 0.02 mm depending on the material that is machined.



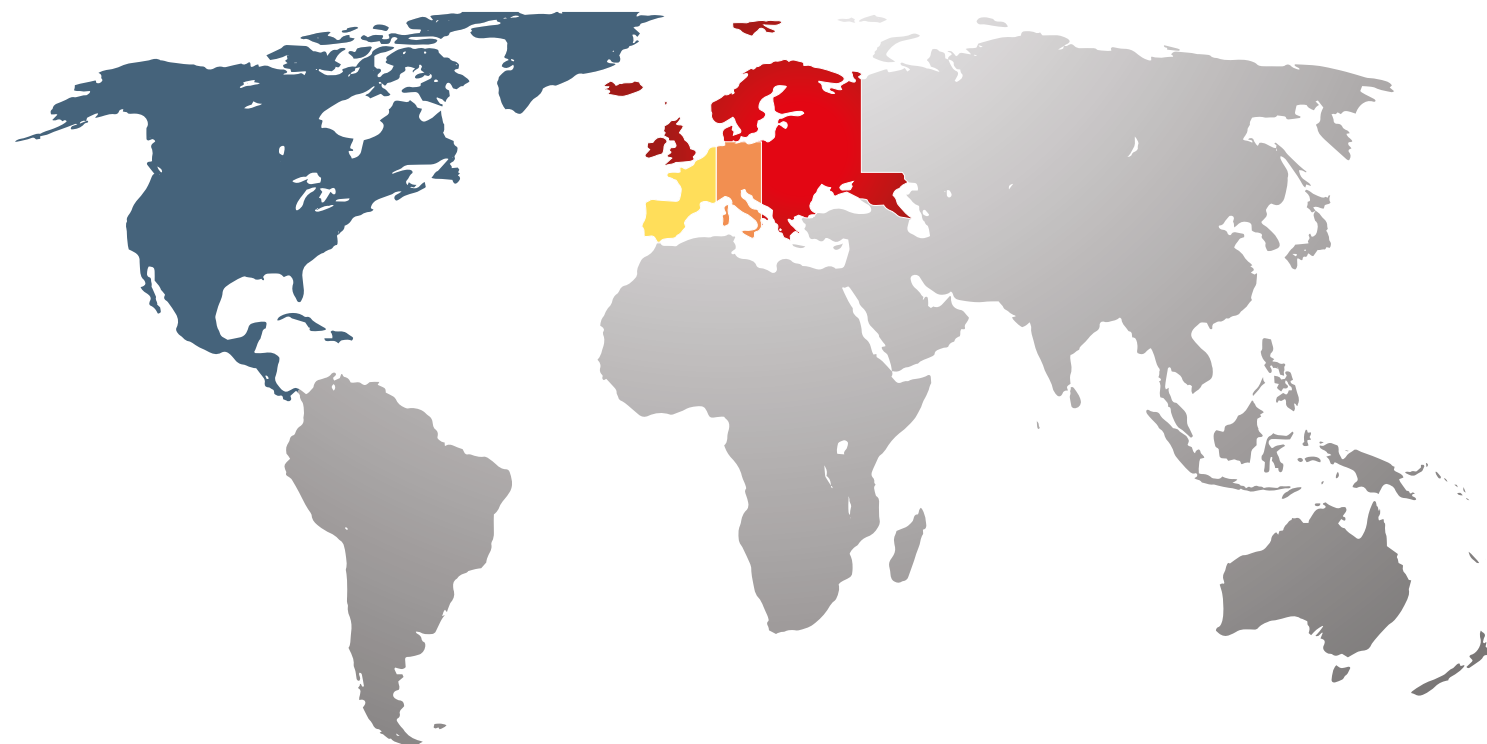

AREA SALES MANAGERS

Pascal Depondt
pdepondt@timesaversint.com
+31 6 38 82 23 14

Timesavers LLC
info@timesaversinc.com
+763 488 6600

Wim van Dalen
wvdalen@timesaversint.com
+31 6 38 82 23 13

Richard van Noordenne
rvnoordenne@timesaversint.com
+31 6 38 82 23 10

Peter de Regt
pdregt@timesaversint.com
+31 6 38 82 23 12

Our support is always nearby!

Timesavers dealers are the application specialists near you. Because they know your market and customers, they can help you find the solution to your deburring or finishing challenge.

Of course, we also have our own Timesavers area sales managers. They are always on hand to answer your questions or help you find the right solution. No matter where you are located in the world.

Have a look at the map to see which area sales manager to contact for your country.



TIMESAVERS ORIGINALS CONSUMABLES

SPARE PARTS

Timesavers provides you original brushes and belts, that ensures that your machine continues to function without problems. When you purchase Timesavers original parts they come with a solid guarantee, to ensure they stand the test of time.

BRUSHES



Timesavers provides original spare parts and tooling, to ensure that your machine performs with the best results. Our brushes are supplied by Boeck GmbH.

BRUSH HOLDERS



Multiple sets of rotary brushes for applications or stock? Consider a brush holder to store your brushes in an orderly fashion. Recommended for the 22 RB series, 32 RB series and 42 RB series.



BELTS



Timesavers opts for the best grinding results possible, and therefore offers high quality abrasive belts from 3M. Their grind technology is remarkable.

TIMESAVERS ORIGINALS OVERVIEW BRUSHES

We offer various brush types for Timesavers 10 series machines, brushes for allround use and various materials up to and including brushes for optimal results on specific material.

BRUSH TYPE	GRIT #	DIMENSION	ITEM NUMBER	APPLICATION	DELIVERY TIME
Media holder 	Hard	Ø 150 mm	00809000	Holder for pads. Hard for the removal of hard burrs. Medium for the removal of other (various) burrs.	2 weeks
	Medium	Ø 150 mm	00809001		
	Hard	Ø 162 mm	00809002		
	Medium	Ø 162 mm	00809003		
Grinding pad 	# 80	Ø 150 mm	00809100	Pregrinding, primary burr removal. Increased grinding results.	2 weeks
	# 120	Ø 150 mm	00809200		
	# 80	Ø 162 mm	00809110		
	# 120	Ø 162 mm	00809210		
Scotch Brite pad® 	# 180	Ø 150 mm	00809300	Pregrinding, light deburring and finish grinding. Increased grinding results.	2 weeks
	# 280	Ø 150 mm	00809400		
	# 180	Ø 162 mm	00809110		
	# 280	Ø 162 mm	00809210		
HERO 	# 80	Ø 150 mm	00809500	Primary and secondary burrs + strong edge roundings. Increased grinding results.	2 weeks
		Ø 162 mm	00809510		
Aluminium Oxide 	# 80	M: Ø 150 mm	00809600	Deburring and edge rounding of various metals. Increased grinding results.	2 weeks
		L: Ø 162 mm	00809310		
Zirconium 	# 80	M: Ø 150 mm	00809700	Deburring and strong edge rounding of stainless steel with bigger radius. Increased grinding results.	2 weeks
		L: Ø 162 mm	00809410		
Silicon carbide 	# 80	M: Ø 150 mm	00809800	Edge rounding and fine surface pattern for aluminium and plastic. Increased grinding results.	2 weeks
		L: Ø 162 mm	00809910		
Hammerhead 		Ø 150 mm	00809900	Deslagging residues.	2 weeks
		Ø 162 mm	00816100	Increased deslagging results.	
Metal wire brush 		Ø 150 mm	00810600	Removal of oxide layers.	2 weeks
Aluminium Oxide flex strips 	Per MG brush strip	Ø 150 mm	00812000	Deburring and edge rounding of (galvanized) thin plates and parts. (23 strips per disc)	2 weeks
		Ø 150 mm	00812100		

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.



TIMESAVERS ORIGINALS OVERVIEW BRUSHES

We offer various brush types for the 22 RB series or the 32 RB series ordered before July 2021, brushes for allround use and various materials up to and including brushes for optimal results on specific material.

Note! Suitable for 32 RB machine serial numbers:

2598-XX RB version before July 2021

2575-XX WRB version before July 2021

2592-XX RBW version before July 2021

2587-XX WRBW version before July 2021

BRUSH TYPE	GRIT #	ITEM NUMBER	APPLICATION	DELIVERY TIME
Aluminium Oxide 	# 80 - 3&5 mm	59943111AO35080	Medium edge rounding and surface finishing of steel, aluminium and stainless steel.	on stock on stock on stock on stock
	# 100 - 3&5 mm	59943111AO35100		
	# 120 - 3&5 mm	59943111AO35120		
	# 180 - 3&5 mm	59943111AO35180		
Silicon Carbide 	# 180 - 3&5 mm	59943111SC35180	Medium edge rounding and surface finishing for aluminium.	2 weeks
Cross flex Aluminium Oxide 	# 80 - 3&5 mm	59943111CF35080	Non-directional finish and removal of milling marks for all types of metal.	2 weeks 2 weeks 2 weeks
	# 180 - 3&5 mm	59943111CF35180		
	# 240 - 3&5 mm	59943111CF35240		
Zirconium 	# 80 - 5&5 mm	59943111ZI55080	Strong edge rounding.	on stock on stock
	# 120 - 5&5 mm	59943111ZI55120		
Ceramic 	# 80 - 5&5 mm	59943111CE55080	Heavy deburring and edge rounding.	2 weeks 2 weeks
	# 120 - 5&5 mm	59943111CE55120		
Metal wire brush 	Non adjustable	599434330000000	Brush for optimal oxide skin removal.	on stock
Flange assembly 		460623	4 x flanges, 16 x bolts. 1 set contains: 4 x flanges, 16 x bolts. (set is free of charge with purchase of a brush set).	on stock

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.


Only Use Timesavers Originals Spare Parts For The Best Results Every Time.




THE NEXT GENERATION BRUSHES



TO DOUBLE YOUR PRODUCTIVITY




**DOUBLE
THE RADIUS**



**DOUBLE
THE FEEDING SPEED**

OLD BRUSHES



R+ BRUSHES

**WITH THE SAME
HIGH LIFETIME**

TIMESAVERS ORIGINALS OVERVIEW R+ BRUSHES

32
.....
RB series

We offer various brush types for the new 32 RB series, brushes for allround use and various materials up to and including brushes for optimal results on specific material.

Note! Suitable for 32 RB series machine serial numbers:

2633-XX RB version after July 2021

2632-XX WRB version after July 2021

2626-XX WRBW version after July 2021

2635-XX HWRB version 2022

BRUSH TYPE	GRIT #	ITEM NUMBER	APPLICATION	DELIVERY TIME
Aluminium Oxide 	# 60 - 5&5 mm # 80 - 5&5 mm # 100 - 5&5 mm # 100 - 3&5 mm # 120 - 5&5 mm # 120 - 3&5 mm # 180 - 3&5 mm # 180 - 3&5 mm	59975121AO55060 59975121AO55080 59975121AO55100 59975121AO35100 59975121AO55120 59975121AO35120 59975121AO35180 59975111AO35180	Medium edge rounding and surface finishing of steel, aluminium and stainless steel. 3x5 mm flaps for parts with small inserts and 5x5 mm for larger parts. Previous brushes with 25% less abrasive.	2 weeks on stock on stock on stock on stock 2 weeks 2 weeks
Silicon Carbide 	# 180 - 5&5 mm # 180 - 3&5 mm	59975121SC55180 59975121SC35180	Medium edge rounding and surface finishing for aluminium. 3x5 mm flaps for parts with small inserts and 5x5 mm for larger parts.	2 weeks on stock
Cross Flex Aluminium Oxide 	# 80 - 3&5 mm # 120 - 3&5 mm # 180 - 3&5 mm # 240 - 3&5 mm	59975121AOCF080 59975121AOCF120 59975121AOCF180 59975121AOCF240	Non-directional finish and removal of milling marks for all types of metal.	2 weeks on stock on stock 2 weeks
Zirconium 	# 80 - 5&5 mm # 120 - 5&5 mm	59975121ZI55080 59975121ZI55120	Strong edge rounding.	on stock on stock
Ceramic 	# 80 - 9&9 mm # 80 - 5&5 mm # 120 - 5&5 mm # 180 - 5&5 mm # 180 - 3&5 mm	59975125CE99080 59975121CE55080 59975121CE55120 59975121CE55180 59975121CE35180	Extreme deburring and edge rounding. 3x5 mm flaps for parts with small inserts and 5x5 mm for larger parts.	2 weeks on stock on stock on stock on stock
Metal wire brush 	Adjustable	599754340000000	Adjustable brush for optimal oxide skin removal.	on stock
Hammerhead 	Module (incl. 9 pins) Hammerhead pin	461530 02209600	Hammerhead for heavy slag removal. The complete Hammerhead unit. contains: 24 modules / 216 pins.	on stock on stock
Flange assembly 	Set (Front & Back) Front Back	00816400 00816200 00816300	1 set contains; 4 x Front and 4 x Back flanges and 4 colour plugs (set is free of charge with purchase of a brush set). Front flange 1 piece Back flange 1 piece	on stock on stock on stock

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.



42

RB series

TIMESAVERS ORIGINALS OVERVIEW

R+ BRUSHES

We offer various brush types for the 42 RB series, brushes for allround use and various materials up to and including brushes for optimal results on specific material.

Note! For brushes for 42 RB series with a working width of 1350 mm and 1600 mm.

BRUSH TYPE	GRIT #	ITEM NUMBER	APPLICATION	DELIVERY TIME
Aluminium Oxide 	# 60 - 5&5 mm	59975121AO55060	Medium edge rounding and surface finishing of steel, aluminium and stainless steel. 3x5 mm flaps for parts with small inserts and 5x5 mm for larger parts.	2 weeks
	# 80 - 5&5 mm	59975121AO55080		on stock
	# 100 - 5&5 mm	59975121AO55100		on stock
	# 100 - 3&5 mm	59975121AO35100		on stock
	# 120 - 5&5 mm	59975121AO55120		on stock
	# 120 - 3&5 mm	59975121AO35120		on stock
	# 180 - 3&5 mm	59975121AO35180	Previous brushes with 25% less abrasive.	on stock
	# 180 - 3&5 mm	59975111AO35180		2 weeks
Silicon Carbide 	# 180 - 5&5 mm	59975121SC55180	Medium edge rounding and surface finishing of aluminium. 3x5 mm flaps for parts with small inserts and 5x5 mm for larger parts.	2 weeks
	# 180 - 3&5 mm	59975121SC35180		on stock
Cross Flex Aluminium Oxide 	# 80 - 3&5 mm	59975121AOCF080	Non-directional finish and removal of milling marks for all types of metal.	2 weeks
	# 120 - 3&5 mm	59975121AOCF120		on stock
	# 180 - 3&5 mm	59975121AOCF180		on stock
	# 240 - 3&5 mm	59975121AOCF240		2 weeks
Zirconium 	# 80 - 5&5 mm	59975121ZI55080	Strong edge rounding.	on stock
	# 120 - 5&5 mm	59975121ZI55120		on stock
Ceramic 	# 80 - 9&9 mm	59975125CE99080	Extreme deburring and edge rounding.	2 weeks
	# 80 - 5&5 mm	59975121CE55080	3x5 mm flaps for parts with small inserts and 5x5 mm for larger parts.	on stock
	# 120 - 5&5 mm	59975121CE55120		on stock
	# 180 - 3&5 mm	59975121CE35180		on stock
	# 180 - 5&5 mm	59975121CE55180		on stock
Metal wire brush 	Adjustable	599754340000000	Adjustable brush for optimal oxide skin removal.	on stock
				on stock
Hammerhead 	Module (incl. 9 pins)	461530	Hammerhead for heavy slag removal. The complete Hammerhead unit. contains: 30 modules / 270 pins.	on stock
	Hammerhead pin	02209600		on stock
Flange assembly 	Set (Front & Back)	00816500	1 set contains; 8 x Front and 8 x Back flanges and colour plugs in 4 colours. plugs (set is free of charge with purchase of a brush set) Front flange 1 piece Back flange 1 piece	on stock
	Front	00816200		on stock
	Back	00816300		on stock

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.



TIMESAVERS ORIGINALS OVERVIEW

BRUSH HOLDERS

In order to keep the workplace organised, we offer brush holders in various sizes as a convenient storage place.

We recommend these holders to anyone who uses multiple sets of brushes for applications or different metals.

DESCRIPTION	AMOUNT OF HOLDERS	SERIES	ITEM NUMBER	DELIVERY TIME
Brush trolley 	Brush holder for 8 brushes, especially designed for R+ Brushes 530 mm x 350 mm.	32 RB series after July 2021 42 RB series	460326	8 weeks
Wall mount brush holder 	Brush holder for 28 brushes. Suitable for brushes on the 22 RB or the 32 RB machines ordered before July 2021. The brush holders can be bought in rows of 4 holders.	22 RB series 32 RB series before July 2021	465495	8 weeks
Wall mount brush holder 	Brush holder for 4 brushes. Suitable for brushes on the 22 RB or the 32 RB machines ordered before July 2021.	22 RB series 32 RB series before July 2021	482179	8 weeks
Wall mount brush holder 	Brush holder for 48 brushes. Suitable for 42 RB and 32 RB brushes. The brush holders can be bought in rows of 8 holders.		465454	8 weeks
Wall mount brush holder 	Brush holder for 8 brushes. Suitable for 42 RB and 32 RB brushes.		482022	8 weeks

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.

BELTS

FOR DEBURRING

3M™ CUBITRON™ II CLOTH BELT 384F

3M™ Cloth Belt 384F is a general purpose, premium aluminium oxide cloth belt with an extra durable backing. Our belts feature fast-cutting abrasive grains that are resin-bonded to a durable X-weight polyester cloth backing. They are recommended for use on metal substrates and wood.

- ✦ Consistent, reliable performance on all substrates
- ✦ Waterproof backing holds up for wet and dry applications
- ✦ X-weight cloth backing withstands heavy sanding and grinding
- ✦ Withstands high heat and pressure
- ✦ Suitable for use on a backstand or benchtop belt sander, and for stroke sanding, portable belt grinding, and wide belt grinding and finishing
- ✦ Choose from grades 36+ to 220+, and P320 - P400

3M™ CUBITRON™ II CLOTH BELT 784F

3M™ Cubitron™ II Cloth Belt 784F features 3M Precision Shaped Grain. Our cloth belts are a precise mix of shaped ceramic and premium aluminium oxide. They have a flexible J-weight cotton backing and open coat construction. The belts also feature a waterproof backing and grinding aid. Precision-Shaped Grain wears evenly to provide exceptional durability with remarkable consistency. As the grain wears, it continuously fractures to form sharp points and edges that slice cleanly through the material.

- ✦ Up to two times longer life than comparable aluminium oxide belts, resists deterioration from heat
- ✦ Consistent, faster results on medium pressure applications
- ✦ Conformable for grinding and blending both straight and contoured surfaces
- ✦ Grinding aid cools abrasive processes on heat-sensitive alloys
- ✦ Suitable for wet and dry applications on all metals
- ✦ For optimal durability and price value, YF weight polyester backing is used for Grades 36-80, while lighter XF weight polyester backing is used for Grades 120-180
- ✦ Durable resin bond resists deterioration from heat, extending the life of the abrasive cloth

3M™ CUBITRON™ II CLOTH BELT 984F

3M™ Cubitron™ II Cloth Belts 984F offer revolutionary performance with 3M Precision Shaped Grain that slices clean through metal. Our 984F belts contain a grinding aid, making it ideal for medium to high pressure applications. Precision-Shaped Grain wears evenly to provide exceptional durability with remarkable consistency. As the grain wears, it continuously fractures to form sharp points and edges that slice cleanly through the material.

- ✦ Minimise operator fatigue as 3M Precision Shaped Grain requires less grinding pressure
- ✦ Cool running temperature reduces risk of discolouration and heat related stress cracks
- ✦ 3M Precision Shaped Grain fractures into self-sharpening points, cutting exceptionally fast and increasing productivity
- ✦ Belt life is increased, meaning more parts per belt for less belt changes
- ✦ YF-weight backing is ideal for medium to high pressure stainless steel, cobalt chrome and nickel alloy applications

FOR FINISHING

3M™ CLOTH BELT 461F*

3M™ Cloth Belt 461F is constructed of sharp silicon carbide abrasive that fractures easily and consistently produces an excellent finish for the duration of the belt life. This resin-bonded cloth belt gives you flexibility, durability, and consistent performance for grinding, blending, deburring, and finishing on all metals.

* The best solution for deburring and finishing of aluminium.

- ✦ Sharp silicon carbide mineral cuts faster than aluminium oxide and produces a consistent finish
- ✦ Tough, water-resistant polyester backing supports wet or dry applications from heavy-duty grinding to fine finishing without tearing or nicking
- ✦ Cloth backing provides flexibility
- ✦ Heat-resistant resin coating bonds abrasive to backing for durability under pressure, heat, and water
- ✦ Use on backstands for grinding and finishing applications

SCOTCH-BRITE™ SURFACE CONDITIONING LOW STRETCH BELT SC-BL

For cleaning, finishing and light deburring use our durable and flexible Scotch-Brite™ Surface Conditioning Low Stretch Belt. Our belts offer effective cutting, while avoiding damage to substrates and are ideal for use on contoured and uneven surfaces. The belts perform best on steel, stainless steel, carbon, titanium, nickel alloys and may be used on aluminium, copper, brass and soft non-ferrous metals. They're available in a wide range designed to suit a variety of different applications. Scotch-Brite Surface Conditioning Low Stretch belts are engineered with aluminium oxide and silicon carbide minerals.

- ✦ Provides beautiful and consistent finish
- ✦ Long life
- ✦ Resists loading
- ✦ Very forgiving
- ✦ Low-stretch reinforced backing keeps the abrasive side taut and firm as it abrades the surface
- ✦ Stretch-resistant backing

TIMESAVERS ORIGINALS

HANDLING

SPARE PARTS

Timesavers also offers solutions that enhance the performance of the machine and ease of use for the machine operator.

TABLES



Looking for even more efficiency? Timesavers buffer and return tables are excellent for one machine operator. The processed parts are gathered at the end of the machine or brought back to the front.

DUST EXTRACTOR



Powerful dust extraction is essential for the safety and health of employees, as well as the performance of the machine. With the extraction units from Timesavers' partner Absaugwerk GmbH, you can be assured of clean air.

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.

TIMESAVERS ORIGINALS OVERVIEW

BUFFER TABLE

The buffer table is an extension of the in- and/or outfeed tables, designed to improve the efficiency and flexibility of the Timesavers machines during the process of loading and unloading.




When loading the machine with metal products, there is often no one who takes out the processed ones. A buffer table assures the parts will be gathered when processed and can be collected when desired. The operator does not have to walk to the back of the machine and can continue feeding parts, which saves time and increases productivity.

- Benefits**
- ✦ Process more products on the machine.
 - ✦ Suitable for small and larger parts.
 - ✦ Table is on wheels, can be moved easily.
 - ✦ Improve operators efficiency.
 - ✦ When not required (or for maintenance) table can be unhooked from machine and relocated.
 - ✦ Foldaway stopper for longer products.
 - ✦ Durable table construction.
 - ✦ Strong rollers belt with a long lifetime .

- Restrictions:**
- ✦ Max load per m²: (up to 100 kg).
 - ✦ Min dimensions parts 50 x 50 mm.
 - ✦ Belt height: 840-940 mm (constant pass to 1040 mm).

Machine preparation

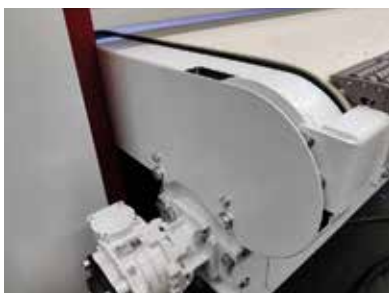

SERIES	SIZES	ITEM NUMBER OUTFEED TABLE	ITEM NUMBER MACHINE PREPARATION	DELIVERY TIME
22 600 RB series*	2000 x 600 x 850 mm	00138821	461918	12 weeks
32 1100 RB series*	2000 x 1100 x 850 mm	00138817	461920	12 weeks
42 1350 RB series*	2000 x 1350 x 850 mm	00138818	461922	12 weeks
42 1600 RB series*	2000 x 1600 x 850 mm	00138816	461922	12 weeks

* other executions required if machine equipped with; constant pass, conveyor cleaning brush, mirrored execution

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.

TIMESAVERS ORIGINALS OVERVIEW

RETURN TABLE

A return table makes it possible to have one machine operator, because the parts will be brought back to the front of the machine.





Motorised execution
180° right curve directly out of machine + straight table length back to the frontside of machine.

Standalone installation
Speed of conveyor can be separately adjusted on cabinet at end of table.
Emergency on/off buttons on table are connected to machines' buttons.

- Restrictions:**
- ✦ Max load per m²: (up to 100 kg).
 - ✦ Standard machine opening 0-20 mm. Machine with constant pass 0 - 100 mm.
 - ✦ Straight table with bend; 180° to front of machine (incl. front table).
 - ✦ Belt speed: 0.5-8 m p/min (incl. drive motor).
 - ✦ Belt height: 840-940 mm (constant pass to 1040 mm).

- Benefits**
- ✦ Process more products in the same time.
 - ✦ Increases operators' efficiency, because he can stay at one place and continue feeding parts.
 - ✦ Durable construction. Aluminium enforced carriage.
 - ✦ Strong conveyor belt. Low maintenance and long lifetime.

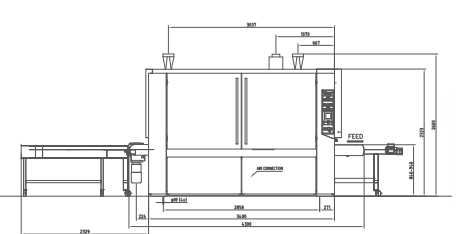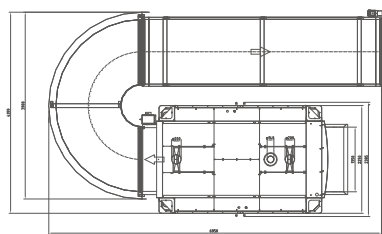

Machine preparation:



SERIES	SIZES	ITEM NUMBER 180° CURVE + TABLE	ITEM NUMBER MACHINE PREPARATION	DELIVERY TIME
22 600 WRB*	2500 x 600 x 850 mm	00138822	461926	12 weeks
22 600 WRBW**	3000 x 600 x 850 mm	00138823	461927	12 weeks
32 1100 RB*	2500 x 1100 x 850 mm	00138824	461928	12 weeks
32 1100 WRB/RBW/WRBW/RBW/HWRB**	3000 x 1100 x 850 mm	00138825	461929	12 weeks
42 1350 RB*	4000 x 1350 x 850 mm	00138826	461930	12 weeks
42 1350 WRB/WRBW/ WWRBW/ RBW/HWRB**	4500 x 1350 x 850 mm	00138831	461931	12 weeks
42 1600 RB*	4000 x 1550 x 850 mm	00138834	461937	12 weeks
42 1600 WRB/WRBW**	4500 x 1550 x 850 mm	00138835	461938	12 weeks

* other executions required if machine equipped with; constant pass, conveyor cleaning brush, mirrored execution

** machine preparation executed for conveyor cleaning brush execution

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.

TIMESAVERS ORIGINALS OVERVIEW

DUST EXTRACTOR

Dust, sparks and gases arise during the deburring process, thus it is important to maintain a dust free working environment to protect the health of employees and increase the service life of machinery.



Wet separators of the Serie B have been specially designed for the separation of materials, which during processing produce flying sparks, are flammable or even explosive (ATEX).

The Serie B has a revolutionary flow technology with a 50% higher suction power and maximum separation efficiency with low energy and water consumption.

The interior of the system is easily accessible via four inspection openings and saves valuable time in cleaning and maintenance. The innovative technology is also reflected in the design and is unique in the industry.

UNIT COMPONENTS

Filter

- ✦ Cleanable stainless-steel metal mesh.
- ✦ Multiple filter stages for maximum degree of separation.
- ✦ Robust quality filters.
- ✦ Long filter service lifetime.


OPTIONS & CONFIGURATIONS

- ✦ ATEX-/fire protection execution needed when processing aluminium.
- ✦ HEPA H14 filter for fine, toxic and hazardous dust particles.
- ✦ Pinch valve.
- ✦ Versatile noise protection by means of galvanized silencer.
- ✦ Ducting between extractor and machine.

OPTIONS FOR DISCHARGE

- ✦ Discharge hose.
- ✦ Containers in different sizes depending on type of extraction unit.

1. SUCTION NOZZLE
Dust and chips from the air are sucked in.
2. BAFFLE PLATE
The substances are directed downwards over a baffle into the water. 25% of the air flow moves upwards.
3. WATER WALL
The negative pressure causes the water to be sucked upwards.
4. A wall of water is formed which binds the residual dust.
5. LAMELLA PRE-SEPARATOR
The air continues to flow through a pre-separator. The special shape of the lamellas separates the air from the water.
6. CONE
The substances bound in the water substances settle to the bottom of the cone. Rounded corners prevent deposits.
7. CALM CHAMBER
The residual water is intercepted in a stilling chamber via two baffle plates and fed into the cone.
8. FILTER STAGE I
Any remaining small particles and residual moisture are separated by a stainless-steel metal mesh.
9. FILTER STAGE II
For carcinogenic substances in recirculation mode, an additional HEPA H14 filter is used.
10. BLOW OUT
The cleaned air is now led back into the hall or outside.
11. BUTTERFLY VALVE
Sludge and water can be quickly drained off via a large butterfly valve (Ø 100 mm).
12. DISCHARGE
The sludge can be disposed of easily via an individual discharge system.

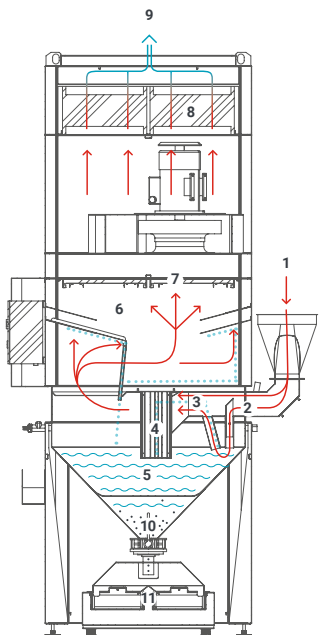

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.

TIMESAVERS ORIGINALS OVERVIEW

DUST EXTRACTOR

Find the right dust extractor to accompany your Timesavers machine. In case your dust extractor is not located nearby (6 m) your machine, please contact us for custom advice.
This data is based on Absaugwerk dust extractors.

SERIES	HEAD	DUST EXTRACTOR	600 MM	900 MM	1050 MM	1100 MM	1300 MM	1350 MM	1600 MM
10	MG	Serie B 2000 3 kW	-	-	-	-	✓	-	-
12	W	Serie B 1000 1,1 kW	✓	-	-	-	-	-	-
12	WW	Serie B 2000 2,2 kW	✓	-	-	-	-	-	-
12	WB	Serie B 2000 2,2 kW	✓	-	-	-	-	-	-
22	H	Serie B 2000 2,2 kW	✓	✓	-	-	-	-	-
22	W	Serie B 2000 2,2 kW	-	✓	-	-	-	-	-
22	W	Serie B 3000 4 kW	-	-	✓	-	-	-	-
22	W	Serie B 3000 4 kW	-	-	-	-	✓	-	-
22	WB	Serie B 3000 4 kW	-	✓	-	-	-	-	-
22	WW	Serie B 3000 4 kW	-	-	✓	-	-	-	-
22	WW	Serie B 3000 5,5 kW	-	-	-	-	✓	-	-
22	WWB	Serie B 3000 4 kW	-	✓	-	-	-	-	-
22	WWB	Serie B 3000 7,5 kW	-	-	✓	-	-	-	-
22	WMD	Serie B 2000 2,2 kW	-	✓	-	-	-	-	-
22	WMDMD	Serie B 3000 4 kW	-	✓	✓	-	-	-	-
22	WRB	Serie B 2000 3 kW	✓	-	-	-	-	-	-
22	WRBW	Serie B 2000 3 kW	✓	-	-	-	-	-	-
32	RB	Serie B 3000 4 kW	-	-	-	✓	-	-	-
32	WRB	Serie B 3000 4 kW	-	-	-	✓	-	-	-
32	WRBW	Serie B 3000 7,5 kW	-	-	-	✓	-	-	-
42	RB	Serie B 3000 4 kW	-	-	-	-	-	✓	-
42	WRB	Serie B 3000 5,5 kW	-	-	-	-	-	✓	-
42	WRBW	Serie B 3000 7,5 kW	-	-	-	-	-	✓	-
42	WWRB	Serie B 3000 7,5 kW	-	-	-	-	-	✓	-
42	HWRB	Serie B 3000 7,5 kW	-	-	-	-	-	✓	-
42	WWRBW	Serie B 4000 15 kW	-	-	-	-	-	✓	-
42	WRB	Serie B 3000 7,5 kW	-	-	-	-	-	-	✓
42	WRBW	Serie B 4000 11 kW	-	-	-	-	-	-	✓
42	WWRB	Serie B 4000 11 kW	-	-	-	-	-	-	✓

Requests & orders: parts@timesaversint.com | www.timesaversint.com
Please mention your machine serial number with your request or order.

Only Use Timesavers Originals Spare Parts For The Best Results Every Time.



T +31 113 23 89 50
parts@timesaversint.com





**TIMESAVERS
INTERNATIONAL BV**

Fruitlaan 20-30, 4462 EP Goes
The Netherlands
T +31 113 23 89 00
F +31 113 23 20 03
info@timesaversint.com
www.timesaversint.com

TIMESAVERS LLC

11123 89th Ave North
Maple Grove, Minnesota USA
T +763 488 6600
F +763 488 6601
info@timesaversinc.com
www.timesaversinc.com

