

SEACAR Continuous Water Quality Analysis: Water Temperature Southwest Region

Last compiled on 18 April, 2022

Contents

| | |
|---|-----------|
| Purpose | 1 |
| Adjustable Inputs | 2 |
| Libraries | 2 |
| File Import | 2 |
| Data Filtering | 3 |
| Monitoring Location Statistics | 5 |
| Seasonal Kendall Tau Analysis | 6 |
| Appendix I: Dataset Summary Box Plots | 9 |
| Appendix II: Excluded Monitoring Locations | 16 |
| Appendix III: Monitoring Location Trendlines | 27 |
| Appendix IV: Monitoring Location Summary Box Plots | 42 |

Purpose

The purpose of this script is to analyze the continuous water temperature data that is created from the SEACAR database, apply filtering criteria, create summary plots, and perform seasonal Kendall Tau analysis for each program location and summary statistics for values measured at the desired depth.

All scripts and outputs can be found on the SEACAR GitHub repository:

https://github.com/FloridaSEACAR/SEACAR_Panzik

Note: The top 2% of data is excluded when computing mean and standard deviations in plotting sections solely for the purpose of getting y-axis scales. The exclusion of the top 2% is not used in any statistics that are exported.

Adjustable Inputs

This is placed early so that it is easier to edit parameters that users may want to adjust.

The first variable is whether you want to create the summary plots in the appendices. If you want to see all appendix plots, set `APP_Plots` to `TRUE`. If you would like to only perform the analysis and export the data files with minimal plots, set `APP_Plots` to `FALSE`. This option is available because generating the plots in the appendices increases the processing time significantly.

Since the file names all have similar structure with only the parameter name being varied, the code below sets variables to include standard string information that is the same across all data files.

This includes: the raw data directory (`in_dir`), output file directory (`out_dir`), file prefix (`file_pref`), date the files were created from the database (`file_date`), the name of the parameter of interest (`param_name`), and region location (`region`). The complete file name is created by pasting all of the strings together with the specific parameter name without spaces (`paste0` command).

```
APP_Plots <- TRUE
in_dir <- "data/"
out_dir <- "output/"
file_pref <- "Combined_WQ_WC_NUT_cont_"
file_date <- "2022-Apr-12"
param_name <- "Water_Temperature"
region <- "SW"
```

Libraries

Loads libraries used in the script. The inclusion of `scipen` option limits how frequently R defaults to scientific notation.

```
library(knitr)
library(data.table)
library(dplyr)
library(lubridate)
library(ggplot2)
library(ggpubr)
library(scales)
library(EnvStats)
library(tidyr)
options(scipen = 999)
```

File Import

Creates file name from inputs above and read in the file from txt format with pipe delimiters.

The code creates output directories for the output files if they don't exist in the directory.

The command `fread` is used because of its improved speed while handling large data files. Only columns that are used by the script are imported from the file, and are designated in the `select` input.

```
if(!file.exists("output")){
  dir.create("output")}

file_in <- paste0(in_dir, file_pref, param_name, "_", region, "-", file_date, ".txt")
data <- fread(file_in, sep = "|", header = TRUE, stringsAsFactors = FALSE,
            select = c("ManagedAreaName", "ProgramID", "ProgramName",
                      "ProgramLocationID", "SampleDate", "Year", "Month",
                      "RelativeDepth", "ResultValue", "ParameterUnits",
                      "ValueQualifier", "SEACAR_QAACFlagCode", "Include"),
            na.strings = "")
```

Data Filtering

Most data filtering is performed on export from the database, and is indicated by the `Include` variable. `Include` values of 1 indicate the data should be used for analysis, values of 0 indicate the data should not be used for analysis. Documentation on the database filtering is provided here: SEACAR Documentation-Analysis Filters and Calculations.docx

The filtering that is performed by the script at this point removes rows that are missing values for `ResultValue` and `RelativeDepth`, and removes any activity type that has “Blank” in the description. Data passes the filtering process if it has an `Include` value of 1.

The script then gets the units of the parameter, sets the `SampleDate` as a date object, and creates various scales of the date to be used by plotting functions.

Because the continuous data is extensive and most measurements are taken every 15 minutes, a daily average is determined and used based on grouping `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, and `SampleDate`. The new `ResultValue` is the mean of all values on that date from that specific monitoring location.

Creates a variable for each `MonitoringID` which is defined as a unique combination of `ManagedAreaName`, `ProgramID`, `ProgramAreaName`, and `ProgramLocationID`.

After the initial filtering, a second filter variable is created to determine whether enough time is represented in the managed area, which is that each managed area has 5 year or more of unique year entries for observation that pass the initial filter. If data passes the first set of filtering criteria and the time criteria, they are used in the analysis.

```
data$Include <- as.logical(data$Include)
data <- data[data$Include==TRUE,]
data <- data[!is.na(data$ResultValue),]
data <- data[!is.na(data$RelativeDepth),]
data <- data[!grep("Blank", data$ActivityType),]

if(param_name == "Water_Temperature"){
  data <- data[data$ResultValue>=-5,]
} else{
  data <- data[data$ResultValue>=0,]
```

```

}

unit <- unique(data$ParameterUnits)

data <- data %>%
  group_by(ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
           SampleDate) %>%
  summarise(Year = unique(Year), Month = unique(Month),
            RelativeDepth = unique(RelativeDepth),
            ResultValue = mean(ResultValue), Include = unique(Include))

## `summarise()` has grouped output by 'ManagedAreaName', 'ProgramID', 'ProgramName', 'ProgramLocationID'

data$SampleDate <- as.Date(data$SampleDate)
data$YearMonth <- paste0(data$Month, "-",
                         data$Year)
data$YearMonthDec <- data$Year + ((data$Month - 0.5) / 12)
data$DecDate <- decimal_date(data$SampleDate)
data <- as.data.table(data[order(data$ManagedAreaName, data$ProgramID, data$ProgramName,
                                 data$ProgramLocationID), ])

data <- data %>%
  mutate(MonitoringID = group_indices(., ManagedAreaName, ProgramID,
                                       ProgramName, ProgramLocationID))

## Warning: The '...' argument of `group_keys()` is deprecated as of dplyr 1.0.0.
## Please `group_by()` first
## This warning is displayed once every 8 hours.
## Call `lifecycle::last_lifecycle_warnings()` to see where this warning was generated.

Mon_Years <- data[data$Include == TRUE, ] %>%
  group_by(MonitoringID) %>%
  summarize(ManagedAreaName = unique(ManagedAreaName),
            ProgramID = unique(ProgramID), ProgramName = unique(ProgramName),
            ProgramLocationID = unique(ProgramLocationID),
            Y = length(unique(Year)), RelativeDepth = unique(RelativeDepth))
Mon_Years <- as.data.table(Mon_Years[
  order(Mon_Years$MonitoringID), ])
Mon_Years$Enough_Time <- ifelse(Mon_Years$Y < 5, FALSE, TRUE)
data$Exclude_MonitoringID <- is.element(data$MonitoringID,
                                           Mon_Years$MonitoringID[
                                             Mon_Years$Enough_Time == FALSE])
data$Use_In_Analysis <- ifelse(data$Include == TRUE &
                                    data$Exclude_MonitoringID == FALSE,
                                    TRUE, FALSE)
Mon_IDs <- unique(data$MonitoringID[data$Use_In_Analysis == TRUE])
Mon_IDs <- Mon_IDs[order(Mon_IDs)]
n <- length(Mon_IDs)

```

Monitoring Location Statistics

Gets summary statistics for each monitoring location. Excluded monitoring locations are not included into whether the data should be used or not. Uses piping from dplyr package to feed into subsequent steps. The following steps are performed:

1. Take the `data` variable and only include rows that have a `Use_In_Analysis` value of TRUE
2. Group data that have the same `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, `Year`, and `Month`.
 - Second summary statistics consider the monitoring location grouping and `Year`.
 - Third summary statistics consider the monitoring location grouping and `Month`.
3. For each group, provide the following information: Earliest Sample Date (`EarliestSampleDate`), Latest Sample Date (`LastSampleDate`), Number of Entries (`N`), Lowest Value (`Min`), Largest Value (`Max`), Median, Mean, Standard Deviation, and a list of all Program IDs included in these measurements.
4. Sort the data in ascending (A to Z and 0 to 9) order based on `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, `Year`, and `Month` in that order.
5. Write summary stats to a pipe-delimited .txt file in the output directory

```
Mon_YM_Stats <- data[data$Use_In_Analysis == TRUE, ] %>%
  group_by(ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
           Year, Month) %>%
  summarize(RelativeDepth = unique(RelativeDepth),
            EarliestSampleDate = min(SampleDate),
            LastSampleDate = max(SampleDate), N = length(ResultValue),
            Min = min(ResultValue), Max = max(ResultValue),
            Median = median(ResultValue), Mean = mean(ResultValue),
            StandardDeviation = sd(ResultValue))
Mon_YM_Stats <- as.data.table(Mon_YM_Stats[order(Mon_YM_Stats$ManagedAreaName,
                                                    Mon_YM_Stats$ProgramID,
                                                    Mon_YM_Stats$ProgramName,
                                                    Mon_YM_Stats$ProgramLocationID,
                                                    Mon_YM_Stats$Year,
                                                    Mon_YM_Stats$Month), ])
fwrite(Mon_YM_Stats, paste0(out_dir, "/", param_name, "_", file_date, "_", region,
                           "_MonitoringLoc_YearMonth_Stats.txt"), sep = "|")

Mon_Y_Stats <- data[data$Use_In_Analysis == TRUE, ] %>%
  group_by(ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
           Year) %>%
  summarize(RelativeDepth = unique(RelativeDepth),
            EarliestSampleDate = min(SampleDate),
            LastSampleDate = max(SampleDate), N = length(ResultValue),
            Min = min(ResultValue), Max = max(ResultValue),
            Median = median(ResultValue), Mean = mean(ResultValue),
            StandardDeviation = sd(ResultValue))
Mon_Y_Stats <- as.data.table(Mon_Y_Stats[order(Mon_Y_Stats$ManagedAreaName,
                                                Mon_Y_Stats$ProgramID,
                                                Mon_Y_Stats$ProgramName,
                                                Mon_Y_Stats$ProgramLocationID,
                                                Mon_Y_Stats$Year), ])
fwrite(Mon_Y_Stats, paste0(out_dir, "/", param_name, "_", file_date, "_", region,
                           "_MonitoringLoc_Year_Stats.txt"), sep = "|")
```

```

Mon_M_Stats <- data[data$Use_In_Analysis == TRUE, ] %>%
  group_by(ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
    Month) %>%
  summarize(RelativeDepth = unique(RelativeDepth),
    EarliestSampleDate = min(SampleDate),
    LastSampleDate = max(SampleDate), N = length(ResultValue),
    Min = min(ResultValue), Max = max(ResultValue),
    Median = median(ResultValue), Mean = mean(ResultValue),
    StandardDeviation = sd(ResultValue))
Mon_M_Stats <- as.data.table(Mon_M_Stats[order(Mon_M_Stats$ManagedAreaName,
  Mon_M_Stats$ProgramID,
  Mon_M_Stats$ProgramName,
  Mon_M_Stats$ProgramLocationID,
  Mon_M_Stats$Month), ])
fwrite(Mon_M_Stats, paste0(out_dir, "/", param_name, "_", file_date, "_", region,
  "_MonitoringLoc_Month_Stats.txt"), sep = "|")

```

Seasonal Kendall Tau Analysis

Gets seasonal Kendall Tau statistics using the `kendallSeasonalTrendTest` from the `EnvStats` package. The `Trend` parameter is determined from a user-defined function based on the median, Senn slope, and p values from the data. Analysis modified from that performed at The Water Atlas: <https://sarasota.wateratlas.usf.edu/water-quality-trends/#analysis-overview>

The following steps are performed:

1. Define the trend function.
2. Take the `data` variable and only include rows that have a `Use_In_Analysis` value of `TRUE`
3. Group data that have the same `ManagedAreaName`, `ProgramID`, `ProgramName`, and `ProgramLocationID`.
4. For each group, provides the following information: Earliest Sample Date (`EarliestSampleDate`), Latest Sample Date (`LastSampleDate`), Number of Entries (`N`), Lowest Value (`Min`), Largest Value (`Max`), Median, Mean, Standard Deviation,
5. For each group, a temporary variable is created to run the `kendallSeasonalTrendTest` function using the `Year` values for year, and `Month` as the seasonal qualifier, and Trend.
 - An `independent.obs` value of `TRUE` indicates that the data should be treated as not being serially auto-correlated. An `independent.obs` value of `FALSE` indicates that it is treated as being serially auto-correlated, but also requires one observation per season per year for the full time of observation.
 - `tau`, Senn Slope (`SennSlope`), Senn Intercept (`SennIntercept`), and `p` are extracted from the model results.
6. The two stats tables are merged based on similar groups, and then Trend is determined from the user-defined function.
7. Write summary stats to a pipe-delimited .txt file in the output directory

- Click this text to open Git directory with output files

8. Add the Monitoring IDS to KT.Stats for easier use while plotting.

```
tauSeasonal <- function(data, independent, stats.median, stats.minYear,
                         stats.maxYear) {
  tau <- NULL
  tryCatch({
    ken <-
      kendallSeasonalTrendTest(
        y = data$ResultValue,
        season = data$Month,
        year = data$Year,
        independent.obs = independent
      )
    tau <- ken$estimate[1]
    p <- ken$p.value[2]
    slope <- ken$estimate[2]
    intercept <- ken$estimate[3]
    trend <- trend_calculator(slope, stats.median, p)
  }, warning = function(w) {
    print(w)
  }, error = function(e) {
    print(e)
  }, finally = {
    if (!exists("tau")) {
      tau <- NULL
    }
    if (!exists("p")) {
      p <- NULL
    }
    if (!exists("slope")) {
      slope <- NULL
    }
    if (!exists("intercept")) {
      intercept <- NULL
    }
    if (!exists("trend")) {
      trend <- NULL
    }
  })
  KT <- c(unique(data$MonitoringID),
          independent,
          stats.median,
          nrow(data),
          stats.minYear,
          stats.maxYear,
          tau,
          p,
          slope,
          intercept,
          trend)
  return(KT)
}
```

```

runStats <- function(data) {
  data$Index <- as.Date(data$SampleDate) # , "%Y-%m-%d")
  data$ResultValue <- as.numeric(data$ResultValue)
  # Calculate basic stats
  stats.median <- median(data$ResultValue, na.rm = TRUE)
  stats.minYear <- min(data$Year, na.rm = TRUE)
  stats.maxYear <- max(data$Year, na.rm = TRUE)
  # Calculate Kendall Tau and Slope stats, then update appropriate columns and table
  KT <- tauSeasonal(data, TRUE, stats.median,
                     stats.minYear, stats.maxYear)
  if (is.null(KT[11])) {
    KT <- tauSeasonal(data, FALSE, stats.median,
                      stats.minYear, stats.maxYear)
  }
  if (is.null(KT$Stats) == TRUE) {
    KT$Stats <- KT
  } else{
    KT$Stats <- rbind(KT$Stats, KT)
  }
  return(KT$Stats)
}

trend_calculator <- function(slope, median_value, p) {
  trend <-
    if (p < .05 & abs(slope) > abs(median_value) / 10.) {
      if (slope > 0) {
        2
      }
      else {
        -2
      }
    }
    else if (p < .05 & abs(slope) < abs(median_value) / 10.) {
      if (slope > 0) {
        1
      }
      else {
        -1
      }
    }
    else
      0
  return(trend)
}

KT$Stats <- NULL
# Loop that goes through each managed area. List of managed areas stored in MA_Years$ManagedAreaName
c_names <- c("MonitoringID", "Independent", "Median", "N", "EarliestYear",
            "LatestYear", "tau", "p", "SennSlope", "SennIntercept", "Trend")
if(n==0){
  c_names <- c("ManagedAreaName", "ProgramID", "ProgramName",
              "ProgramLocationID", "Independent", "Median", "N",
              "EarliestYear", "LatestYear", "tau", "p", "SennSlope",
              "SennIntercept", "Trend")
  KT$Stats <- data.frame(matrix(ncol=14, nrow=0))
}

```

```

colnames(KT.Stats) <- c_names
fwrite(KT.Stats, paste0(out_dir, "/", param_name, "_", file_date, "_", region,
                      "_KendallTau_Stats.txt"), sep = "|")
} else{
  for (i in 1:n) {
    values <- data[data$Use_In_Analysis == TRUE &
                  data$MonitoringID == Mon_IDs[i], ]
    if (nrow(values) > 0) {
      KT.Stats <- runStats(values)
    }
  }
  KT.Stats <- as.data.frame(KT.Stats)
  if(dim(KT.Stats)[2]==1){
    KT.Stats <- as.data.frame(t(KT.Stats))
  }

  c_names <- c("MonitoringID", "Independent", "Median", "N", "EarliestYear",
             "LatestYear", "tau", "p", "SennSlope", "SennIntercept", "Trend")
  colnames(KT.Stats) <- c_names
  rownames(KT.Stats) <- seq(1:nrow(KT.Stats))
  KT.Stats$Independent <- as.logical(KT.Stats$Independent)
  KT.Stats$Median <- as.numeric(KT.Stats$Median)
  KT.Stats$N <- as.integer(KT.Stats$N)
  KT.Stats$EarliestYear <- as.integer(KT.Stats$EarliestYear)
  KT.Stats$LatestYear <- as.integer(KT.Stats$LatestYear)
  KT.Stats$tau <- round(as.numeric(KT.Stats$tau), digits=4)
  KT.Stats$p <- round(as.numeric(KT.Stats$p), digits=4)
  KT.Stats$SennSlope <- as.numeric(KT.Stats$SennSlope)
  KT.Stats$SennIntercept <- as.numeric(KT.Stats$SennIntercept)
  KT.Stats$Trend <- as.integer(KT.Stats$Trend)
  KT.Stats <- merge.data.frame(Mon_Years[,-c("Y", "Enough_Time")], KT.Stats, by = "MonitoringID")
  KT.Stats$MonitoringID <- NULL
  fwrite(KT.Stats, paste0(out_dir, "/", param_name, "_", file_date, "_", region,
                        "_KendallTau_Stats.txt"), sep = "|")
  KT.Stats$MonitoringID <- Mon_IDs
}

```

Appendix I: Dataset Summary Box Plots

Box plots are created by using the entire data set and excludes any data that has been previously filtered out. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of TRUE
2. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the box plots
3. Set the plot type as a box plot with the size of the outlier points
4. Create the title, x-axis, y-axis, and color fill labels
5. Set the y and x limits
6. Make the axis labels bold

7. Plot the arrangement as a set of panels

This set of box plots are grouped by year.

```

min_RV <- min(data$ResultValue[data$Include == TRUE])
mn_RV <- mean(data$ResultValue[data$Include == TRUE &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
sd_RV <- sd(data$ResultValue[data$Include == TRUE &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
y_scale <- mn_RV + 4 * sd_RV

p1 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = Year, y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale", x = "Year",
       y = paste0("Values (", unit, ")")) +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p2 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = Year, y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation", x = "Year",
       y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) + theme(axis.text.x = element_text(face = "bold"),
                           axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = as.integer(Year), y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
       x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits = c(max(data$Year) - 10.5, max(data$Year)+0.5),
                     breaks = seq(max(data$Year) - 10, max(data$Year), 2)) +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

set <- ggarrange(p1, p2, p3, ncol = 1)

p0 <- ggplot() + labs(title = "Summary Box Plots for Entire Data",
                       subtitle = "By Year") + theme_bw() +
  theme(plot.title = element_text(face="bold"),
        panel.border = element_blank(), panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

Yset <- ggarrange(p0, set, ncol=1, heights = c(0.07, 1))

```

This set of box plots are grouped by year and month with the color being related to the month.

```

p1 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = YearMonthDec, y = ResultValue,
                  group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale", x = "Year",
       y = paste0("Values (", unit, ")"), color="Month") +
  theme(legend.position = "top", legend.box = "horizontal",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold")) +
  guides(color = guide_legend(nrow = 1))

p2 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = YearMonthDec, y = ResultValue,
                  group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 5x Standard Deviation",
       x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = YearMonthDec, y = ResultValue,
                  group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 5x Standard Deviation, Last 10 Years",
       x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits = c(max(data$Year) - 10.5, max(data$Year)+0.5),
                     breaks = seq(max(data$Year) - 10, max(data$Year), 2)) +
  theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

leg <- get_legend(p1)
set <- ggarrange(leg, p1 + theme(legend.position = "none"), p2, p3, ncol = 1,
                 heights = c(0.1, 1, 1, 1))

p0 <- ggplot() + labs(title = "Summary Box Plots for Entire Data",
                      subtitle = "By Year & Month") + theme_bw() +
  theme(plot.title = element_text(face="bold"),
        panel.border = element_blank(), panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

YMset <- ggarrange(p0, set, ncol=1, heights = c(0.07, 1))

```

The following box plots are grouped by month with fill color being related to the month. This is designed to view potential seasonal trends.

```

p1 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = Month, y = ResultValue,
                  group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale", x = "Month",
       y = paste0("Values (", unit, ")"), fill="Month") +

```

```

scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
theme(legend.position = "top", legend.box = "horizontal",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold")) +
guides(fill = guide_legend(nrow = 1))

p2 <- ggplot(data = data[data$Include == TRUE, ],
              aes(x = Month, y = ResultValue,
                  group = Month, fill = as.factor(Month))) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Scaled to 5x Standard Deviation",
      x = "Month", y = paste0("Values (", unit, ")")) +
ylim(0, y_scale) +
scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Include == TRUE &
                           data$Year >= max(data$Year) - 10, ],
              aes(x = Month, y = ResultValue,
                  group = Month, fill = as.factor(Month))) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Scaled to 5x Standard Deviation, Last 10 Years",
      x = "Month", y = paste0("Values (", unit, ")")) +
ylim(0, y_scale) +
scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

leg <- get_legend(p1)
set <- ggarrange(leg, p1 + theme(legend.position = "none"), p2, p3, ncol = 1,
                 heights = c(0.1, 1, 1, 1))




p0 <- ggplot() + labs(title = "Summary Box Plots for Entire Data",
                      subtitle = "By Month") + theme_bw() +
theme(plot.title = element_text(face="bold"),
      panel.border = element_blank(), panel.grid.major = element_blank(),
      panel.grid.minor = element_blank(), axis.line = element_blank())

Mset <- ggarrange(p0, set, ncol=1, heights = c(0.07, 1))

```


Summary Box Plots for Entire Data

By Year

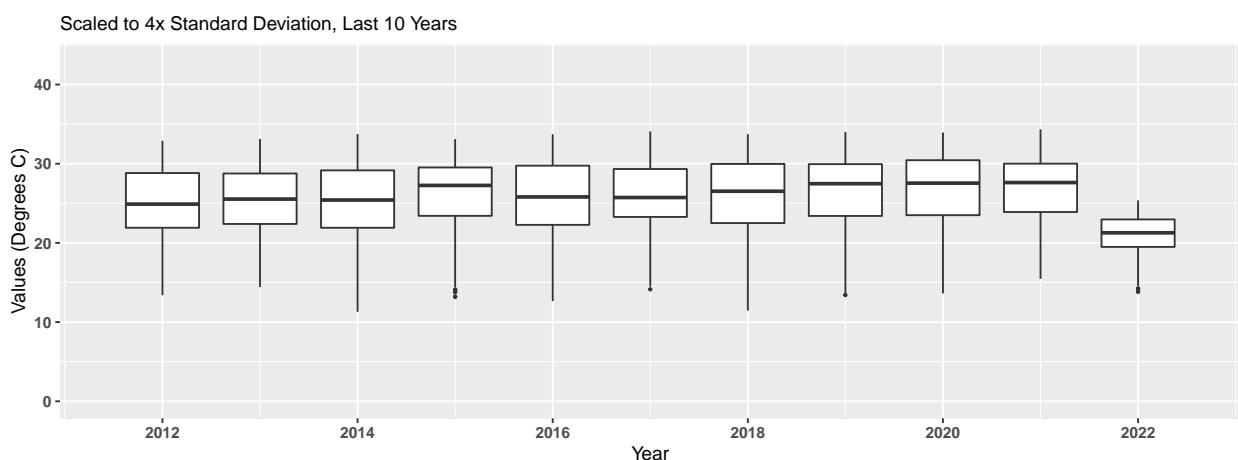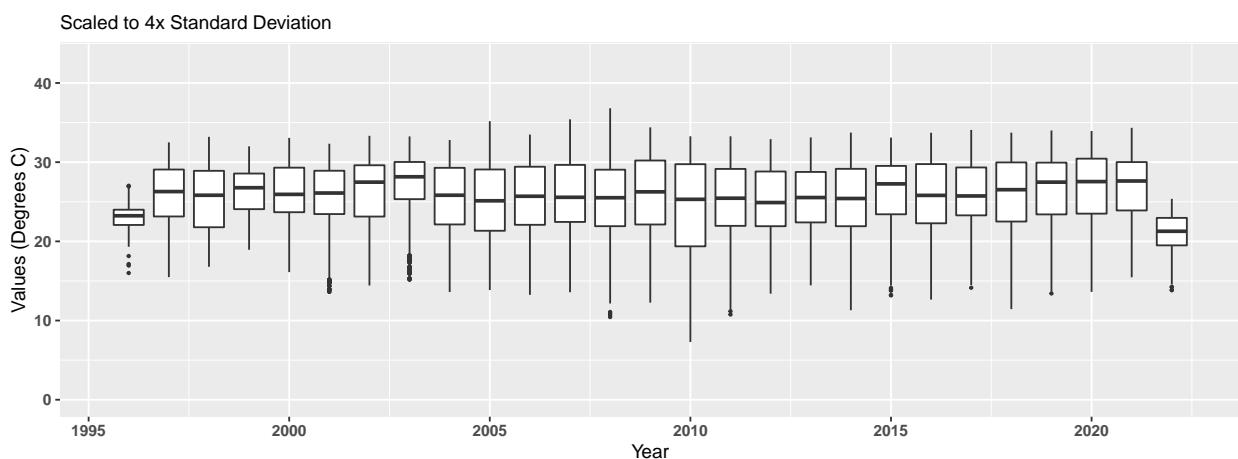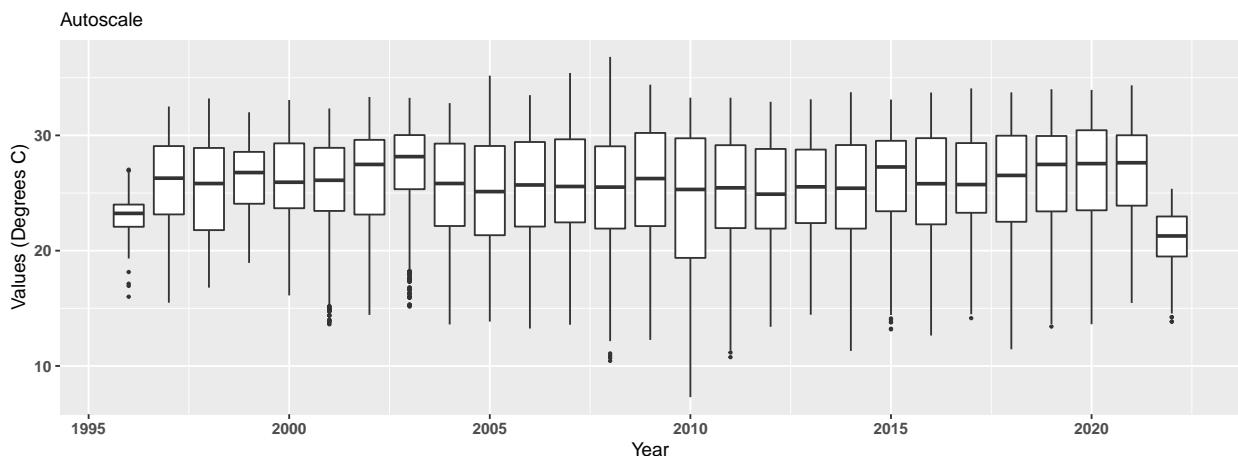


Summary Box Plots for Entire Data

By Year & Month

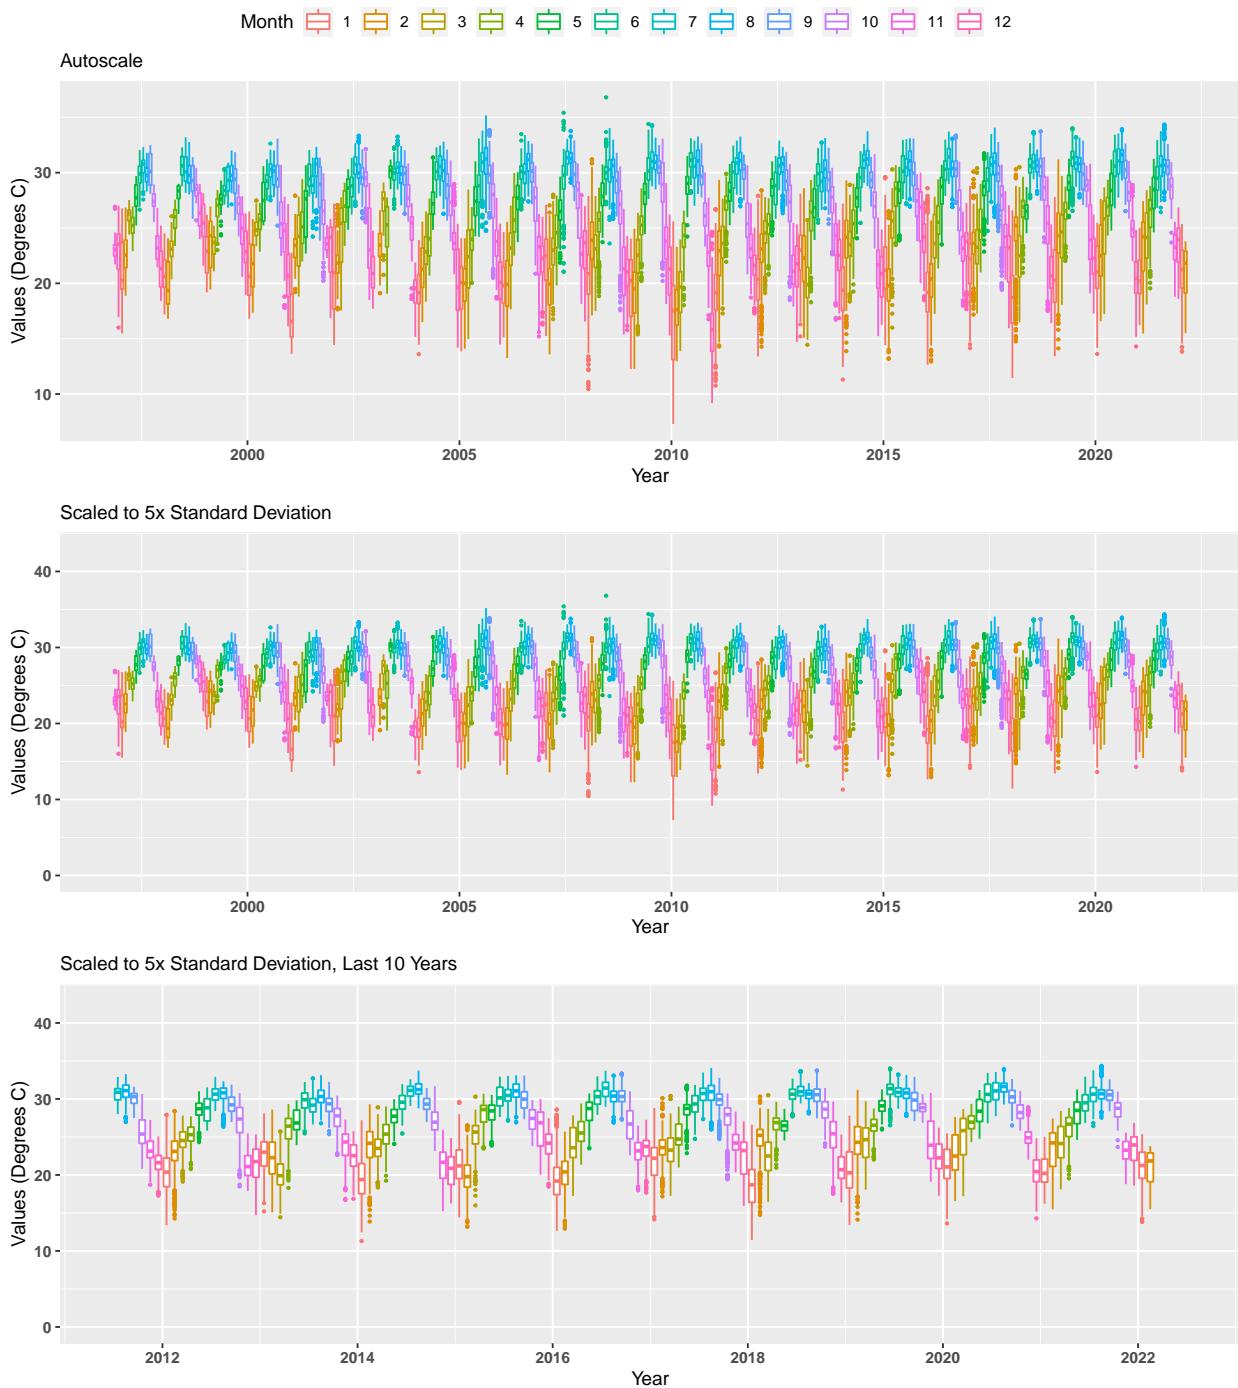

Summary Box Plots for Entire Data

By Month

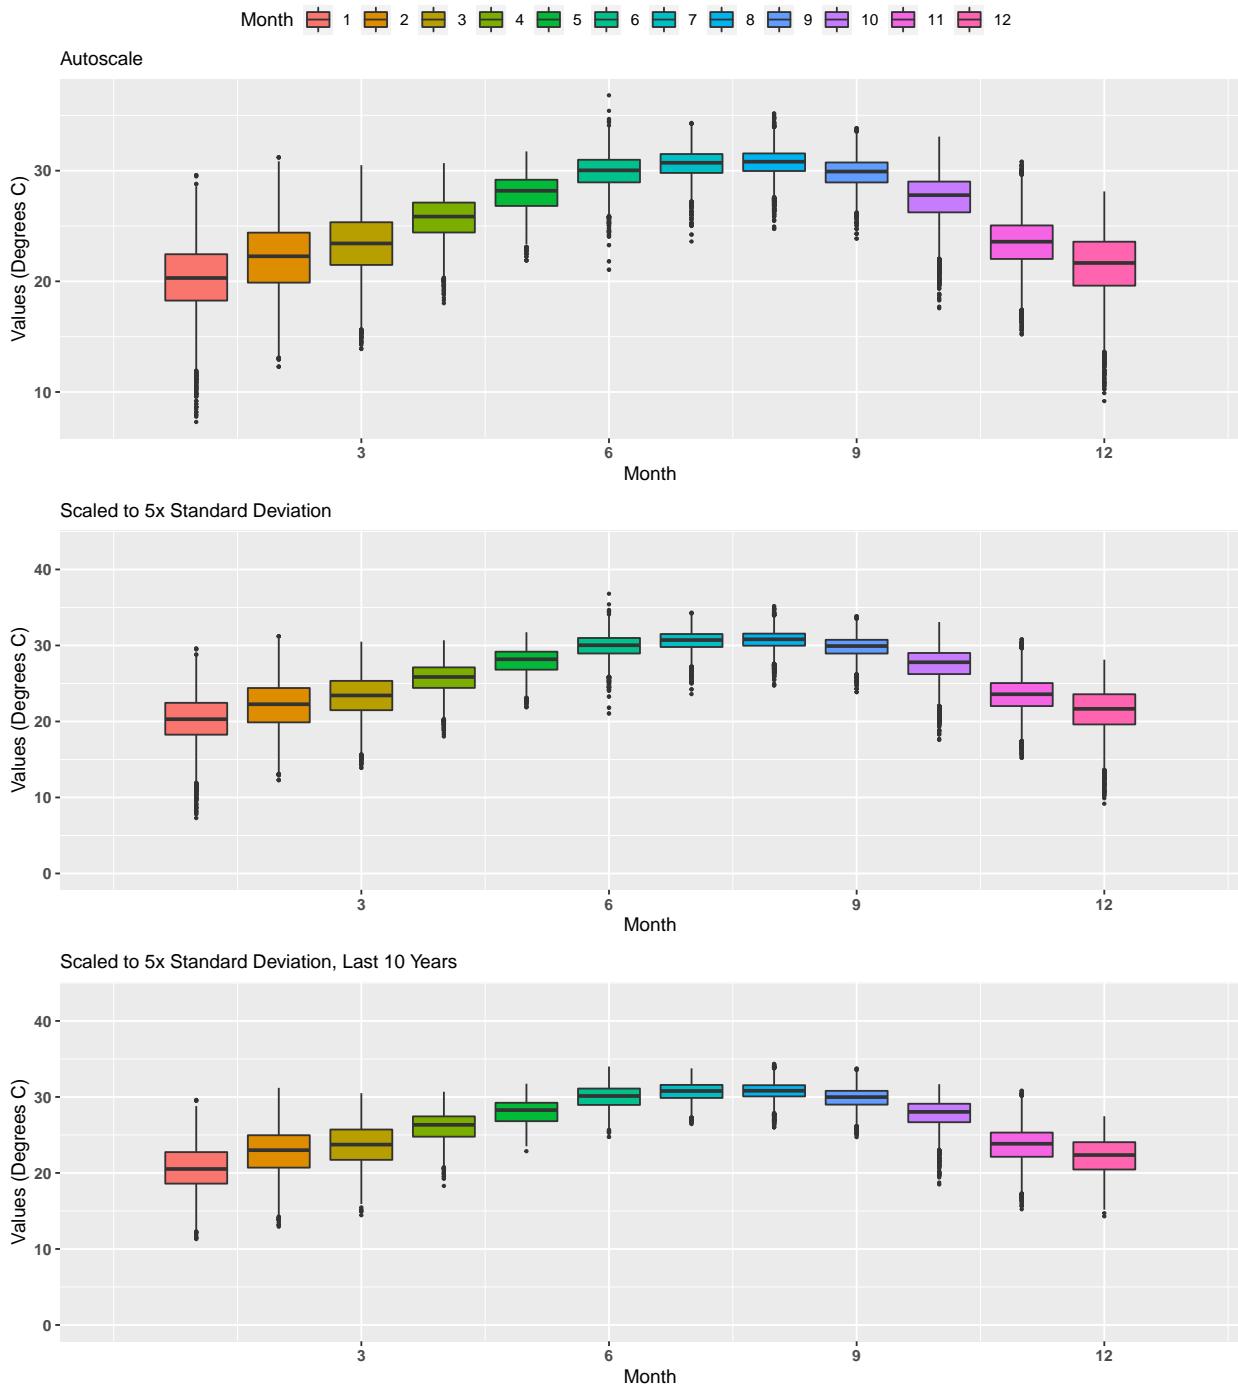


Appendix II: Excluded Monitoring Locations

Scatter plots of data values are created for monitoring locations that have fewer than 5 separate years of data entries.


```
Mon_Exclude <- Mon_Years[Mon_Years$Enough_Time==FALSE,]
Mon_Exclude <- Mon_Exclude[order(Mon_Exclude$MonitoringID),]
z=length(Mon_Exclude$MonitoringID)

if(z==0){
  print("There are no monitoring locations that qualify.")
} else {
  for(i in 1:z){
    MA_name <- unique(data$ManagedAreaName[
      data$MonitoringID==Mon_Exclude$MonitoringID[i]])
    Mon_name <- paste(unique(data$ProgramID[
      data$MonitoringID==Mon_Exclude$MonitoringID[i]]),
      unique(data$ProgramName[
        data$MonitoringID==Mon_Exclude$MonitoringID[i]]),
      unique(data$ProgramLocationID[
        data$MonitoringID==Mon_Exclude$MonitoringID[i]]),
      sep = " | ")
    
    p1<-ggplot(data=data[data$MonitoringID==Mon_Exclude$MonitoringID[i] &
      data$Include == TRUE, ],
      aes(x = SampleDate, y = ResultValue)) +
      geom_point() +
      labs(title =
        paste0("Scatter Plot of Excluded Monitoring Location ",
          MA_name, "\n", Mon_name, "\n(", Mon_Exclude$Y[i],
          " Unique Years"),
        subtitle="Autoscale", x = "Year",
        y = paste0("Values (", unit, ")")) +
      theme(axis.text.x = element_text(face = "bold")) +
      scale_x_date(labels = date_format("%m-%Y"))
    print(p1)
  }
}
```


Scatter Plot of Excluded Monitoring Location Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255138081321701
(2 Unique Years)
Autoscale

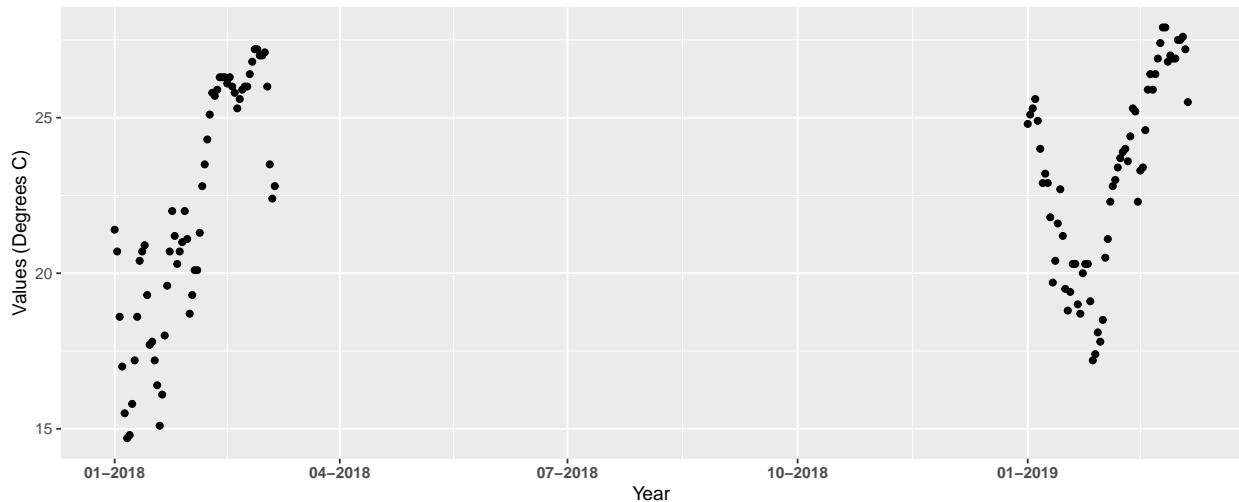


Scatter Plot of Excluded Monitoring Location Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255443081314700
(3 Unique Years)
Autoscale

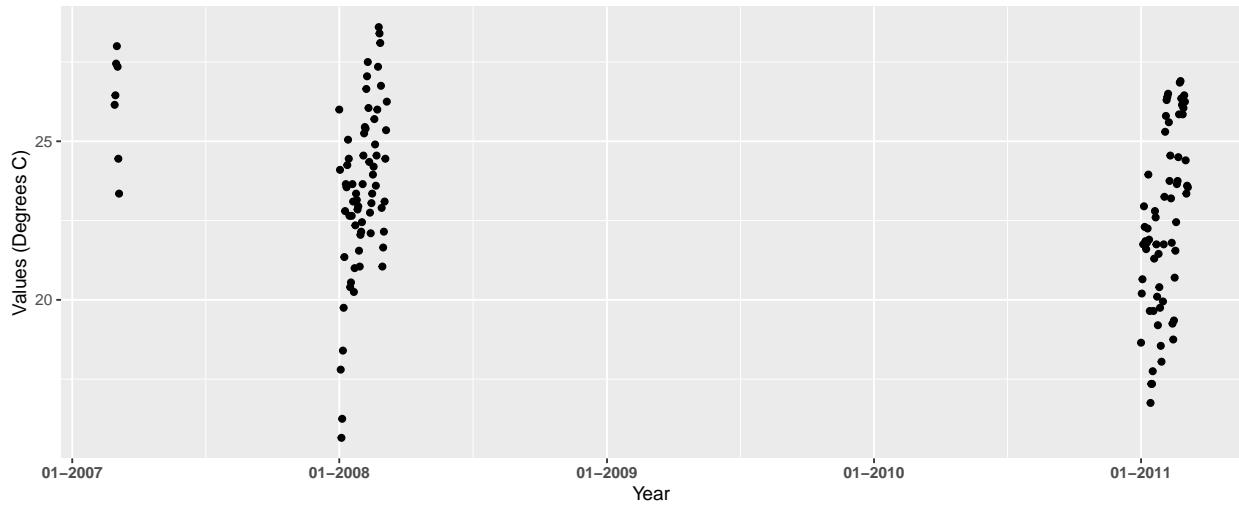


Scatter Plot of Excluded Monitoring Location Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255532081314300
(2 Unique Years)
Autoscale

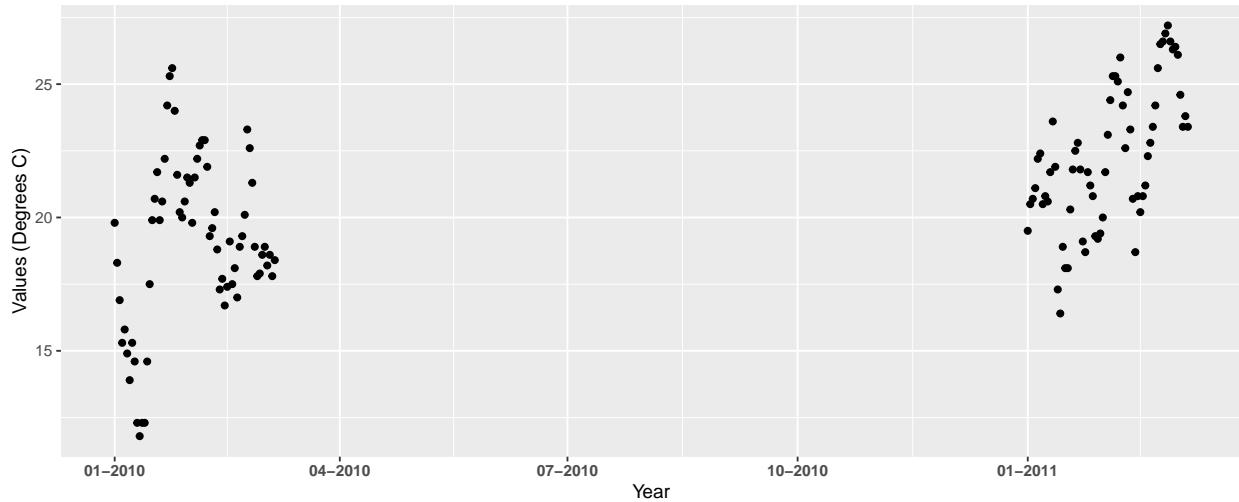


Scatter Plot of Excluded Monitoring Location Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255732081363700
(4 Unique Years)
Autoscale

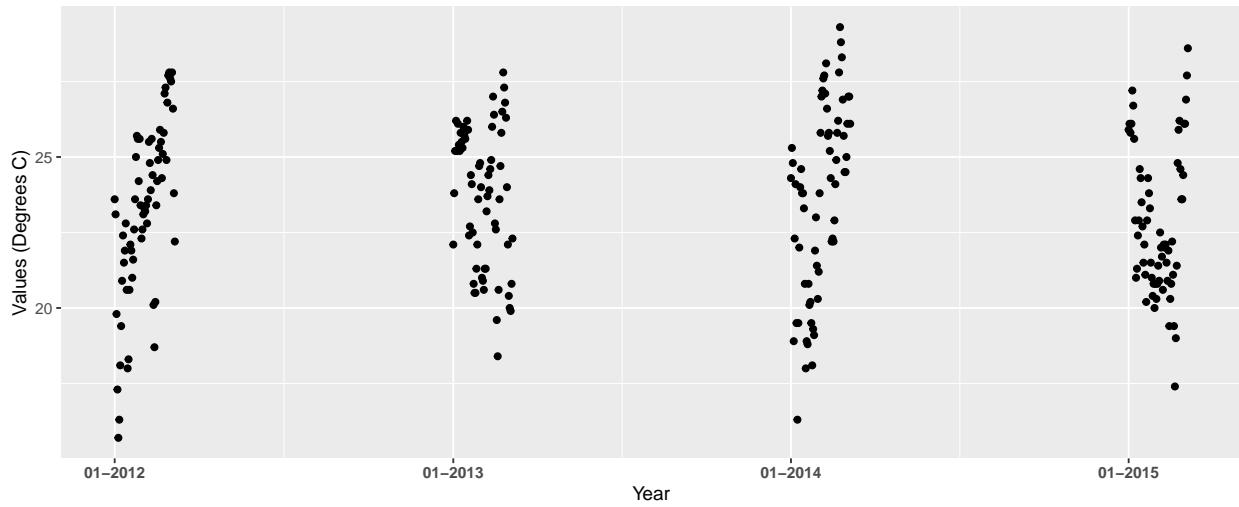

Scatter Plot of Excluded Monitoring Location Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB04
(1 Unique Years)
Autoscale

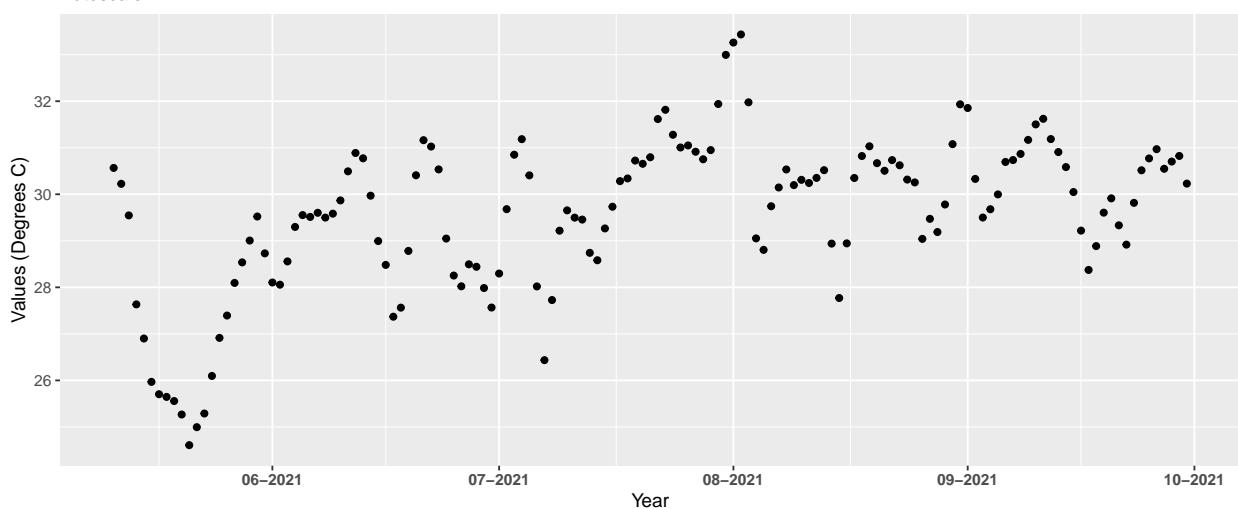


Scatter Plot of Excluded Monitoring Location Gasparilla Sound–Charlotte Harbor Aquatic Preserve
7 | National Water Information System | 02293252
(3 Unique Years)
Autoscale

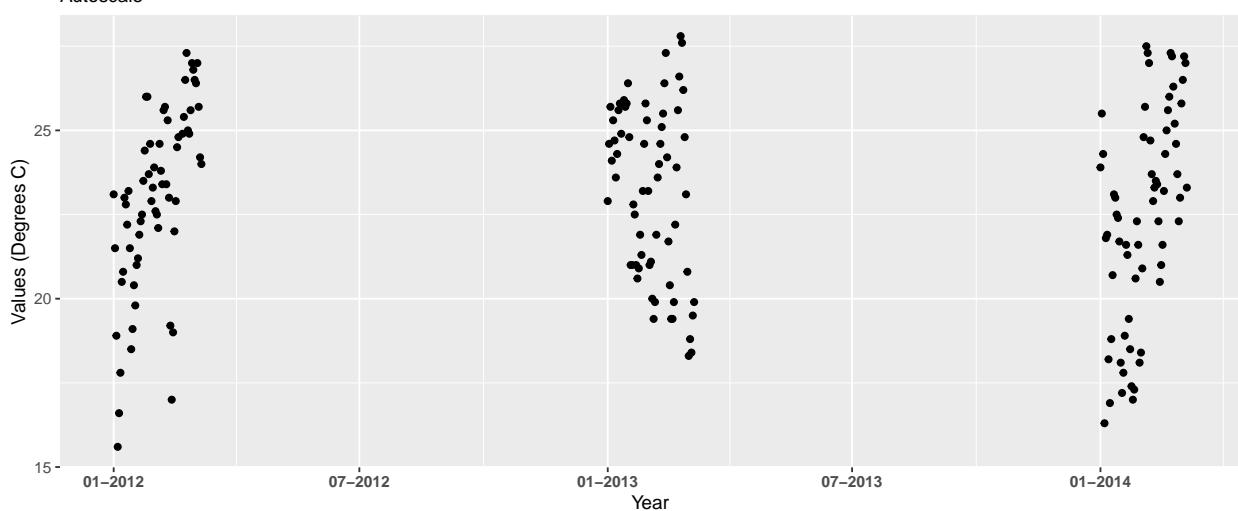


Scatter Plot of Excluded Monitoring Location Gasparilla Sound–Charlotte Harbor Aquatic Preserve
7 | National Water Information System | 02293254
(3 Unique Years)

Autoscale

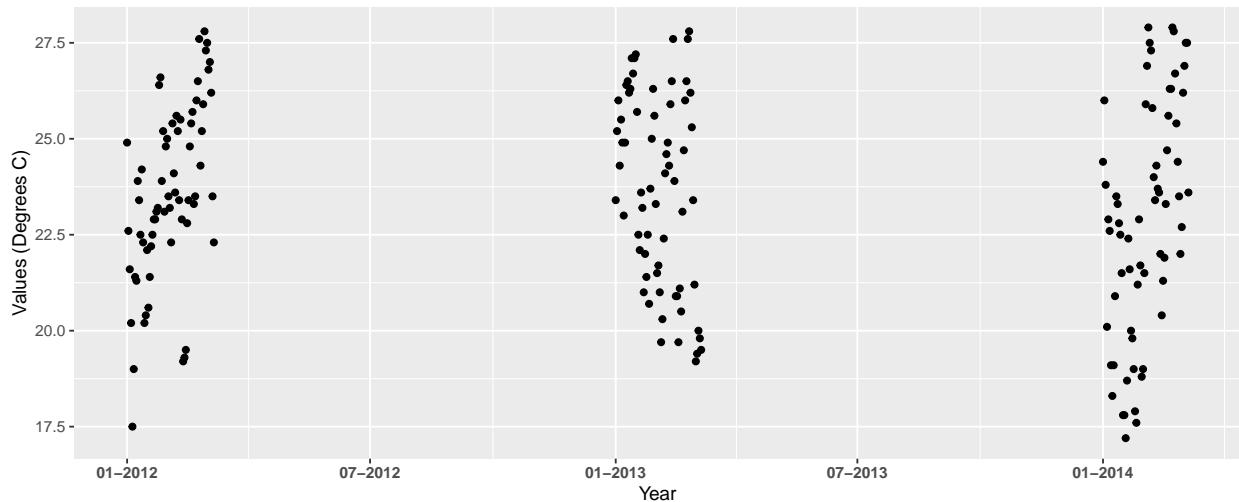


Scatter Plot of Excluded Monitoring Location Pine Island Sound Aquatic Preserve
7 | National Water Information System | 02293249
(4 Unique Years)


Autoscale

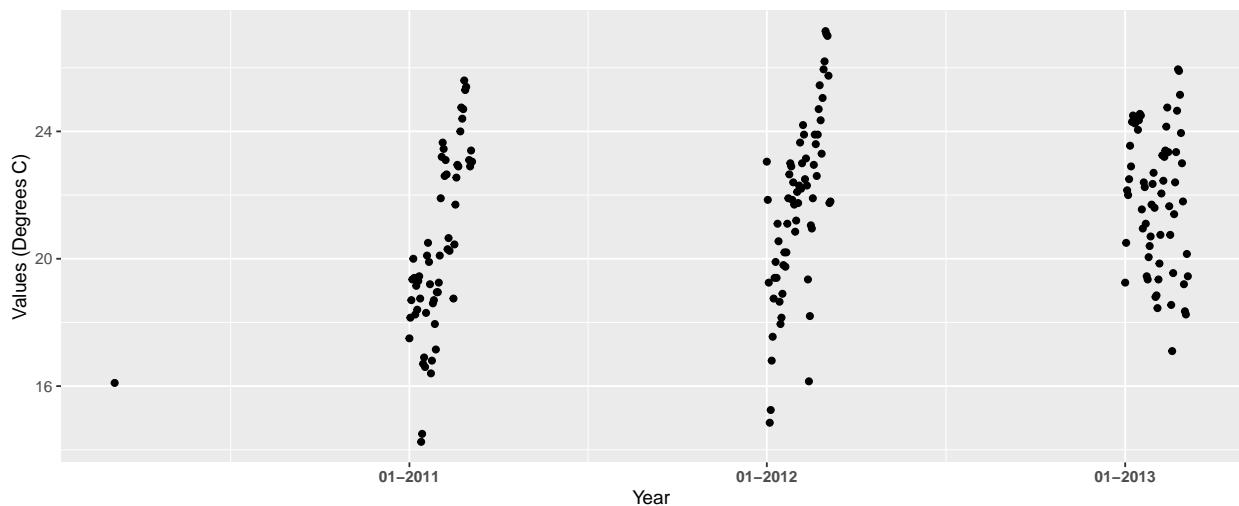


Scatter Plot of Excluded Monitoring Location Pinellas County Aquatic Preserve
5 | National Data Buoy Center | FHPF1
(2 Unique Years)
Autoscale

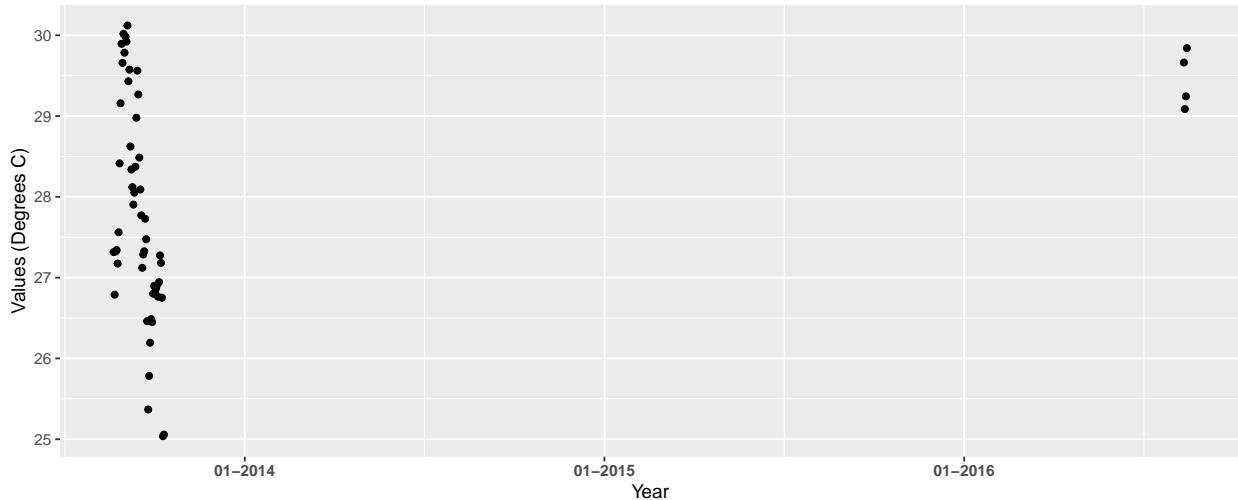


Scatter Plot of Excluded Monitoring Location Pinellas County Aquatic Preserve
7 | National Water Information System | 02310175
(3 Unique Years)

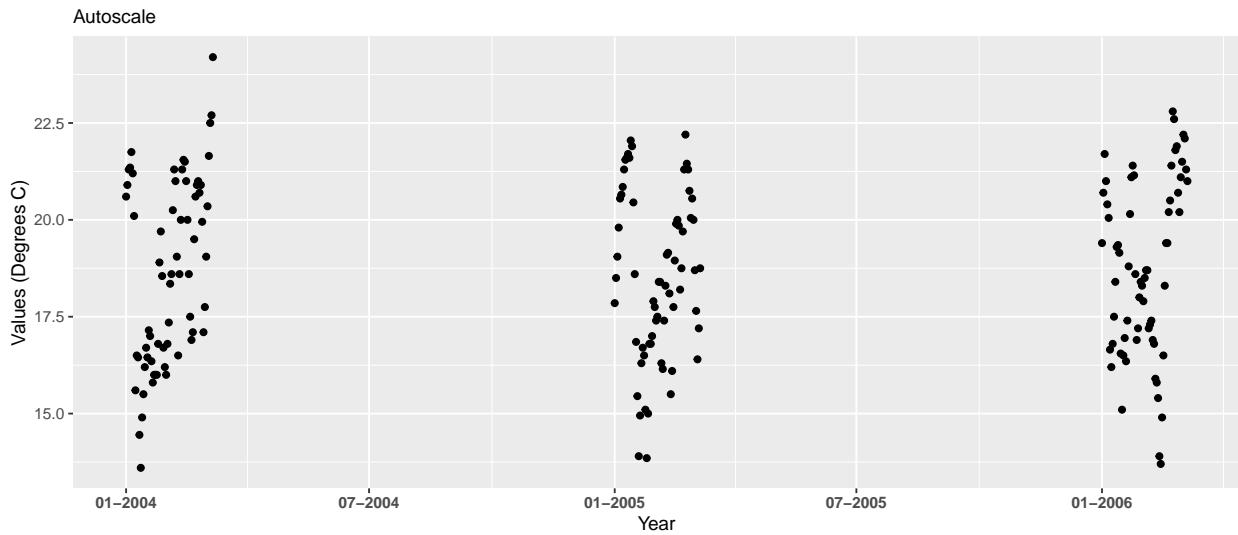


Scatter Plot of Excluded Monitoring Location Pinellas County Aquatic Preserve
7 | National Water Information System | 02310207
(3 Unique Years)
Autoscale

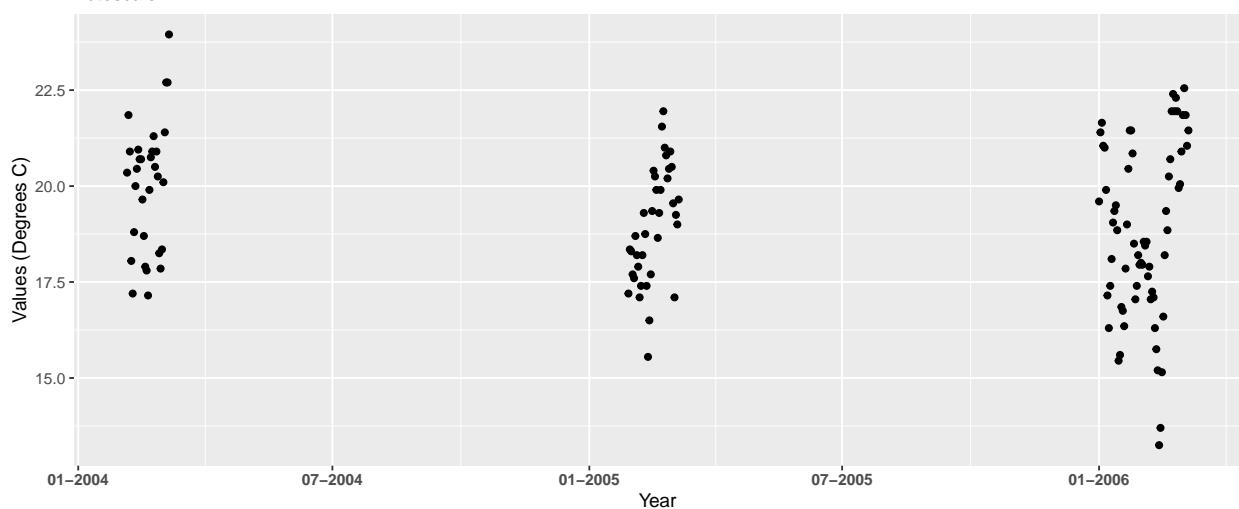


Scatter Plot of Excluded Monitoring Location Rookery Bay Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbbmwq
(2 Unique Years)
Autoscale

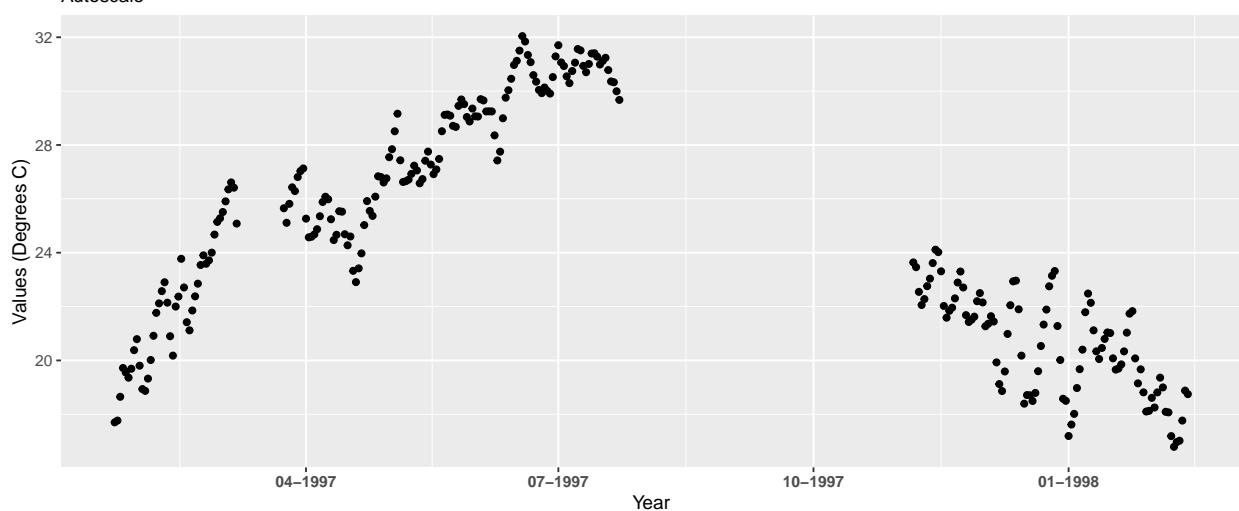


Scatter Plot of Excluded Monitoring Location Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 02291330
(3 Unique Years)
Autoscale

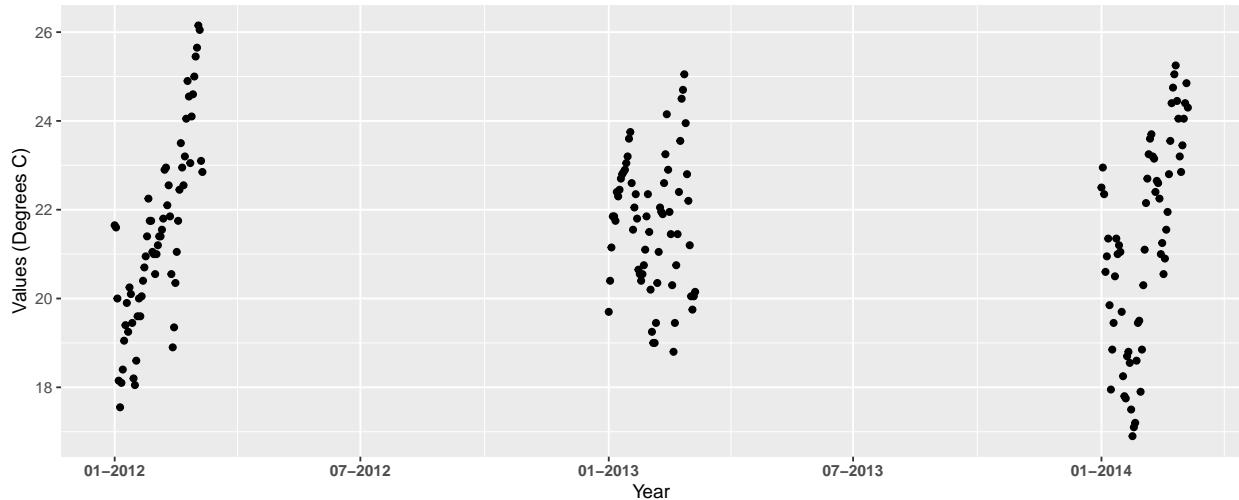


Scatter Plot of Excluded Monitoring Location Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255138081321701
(2 Unique Years)
Autoscale

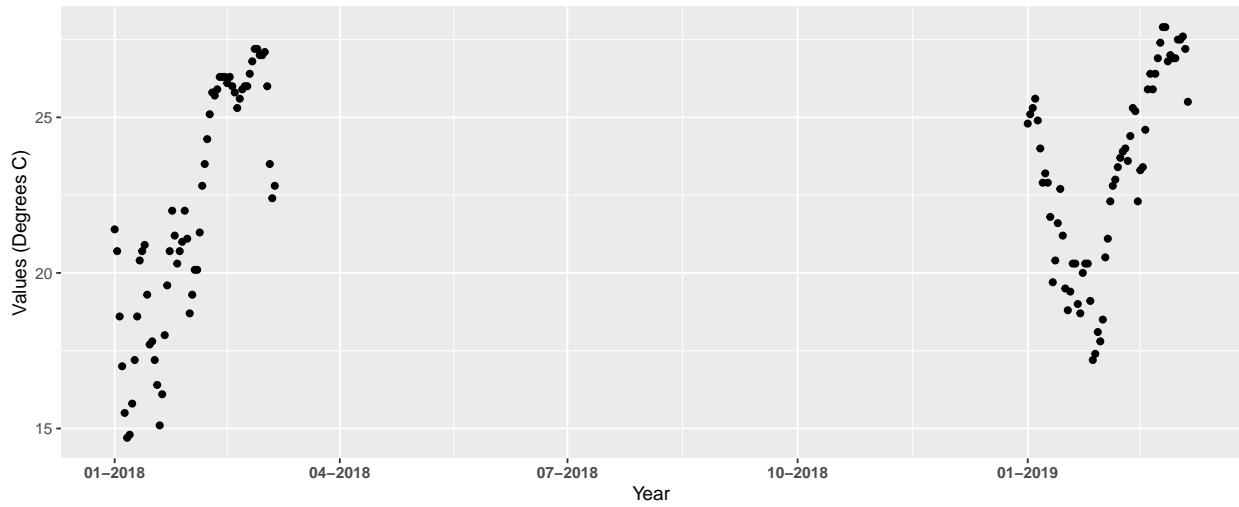


Scatter Plot of Excluded Monitoring Location Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255443081314700
(3 Unique Years)
Autoscale

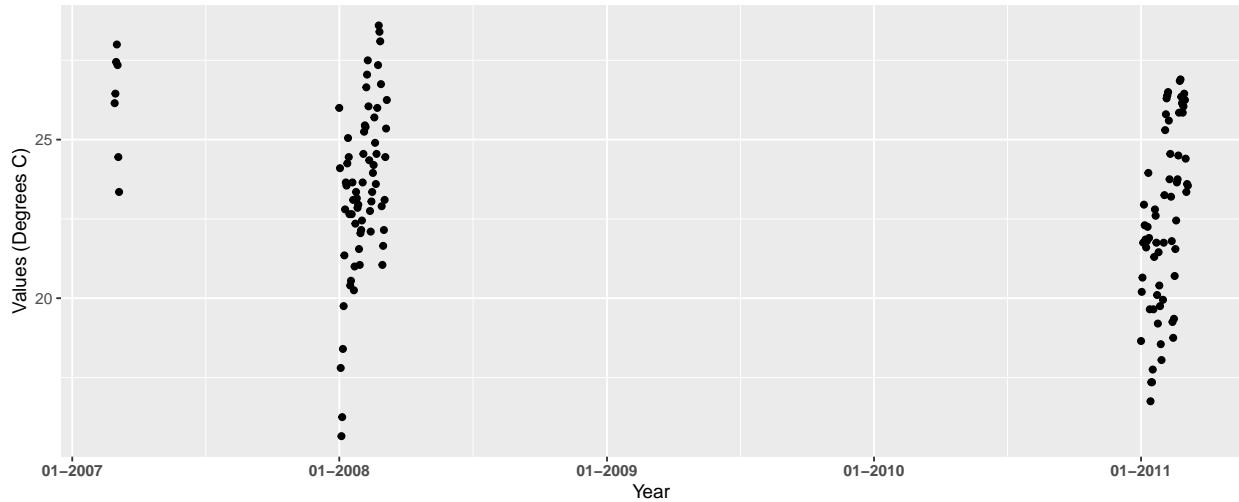


Scatter Plot of Excluded Monitoring Location Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255532081314300
(2 Unique Years)
Autoscale

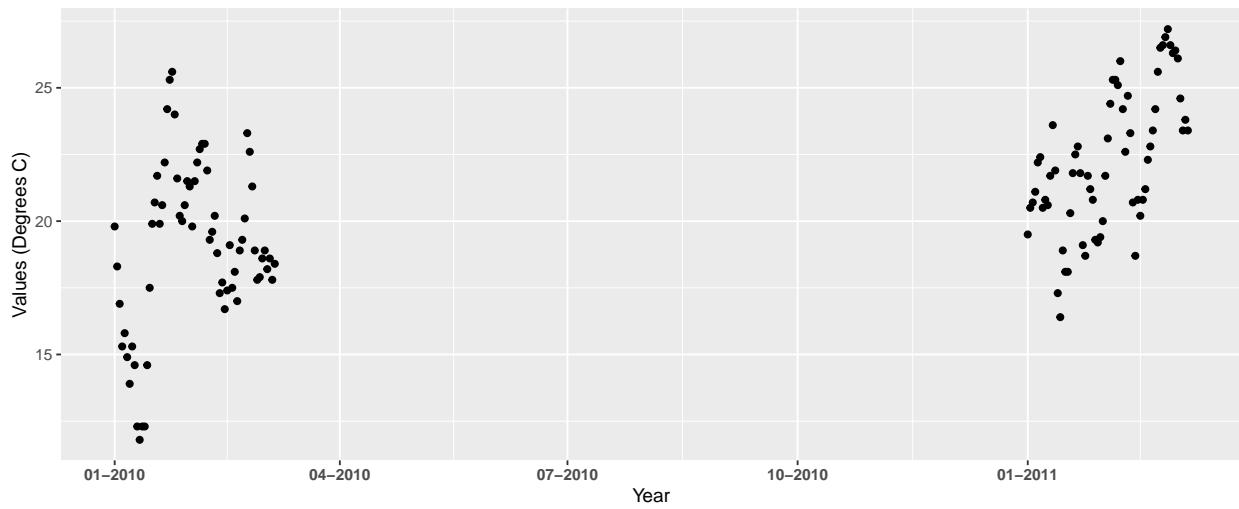

Scatter Plot of Excluded Monitoring Location Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255732081363700
(4 Unique Years)
Autoscale

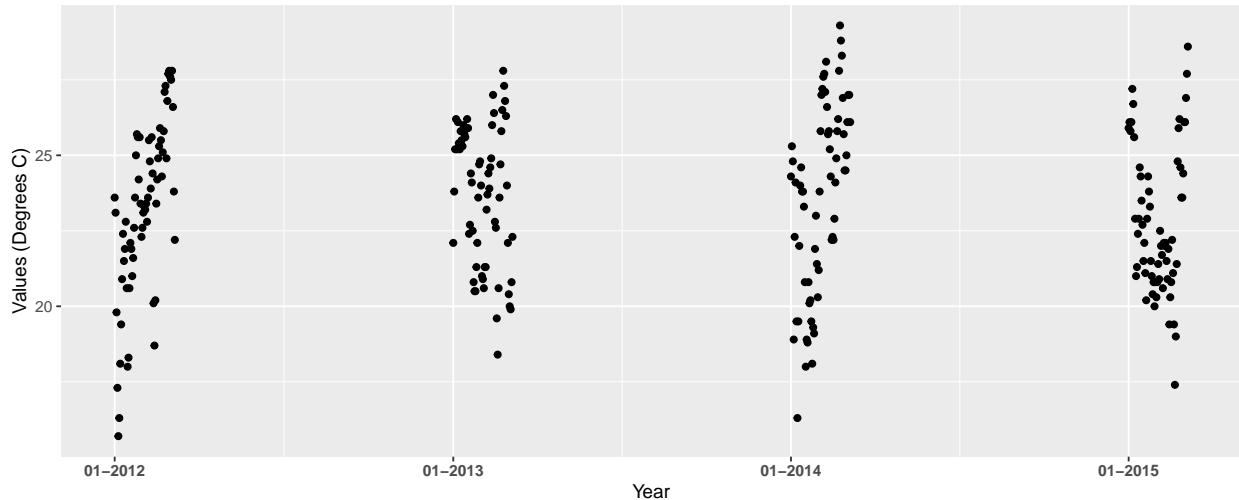


Scatter Plot of Excluded Monitoring Location Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbbmwq
(2 Unique Years)
Autoscale

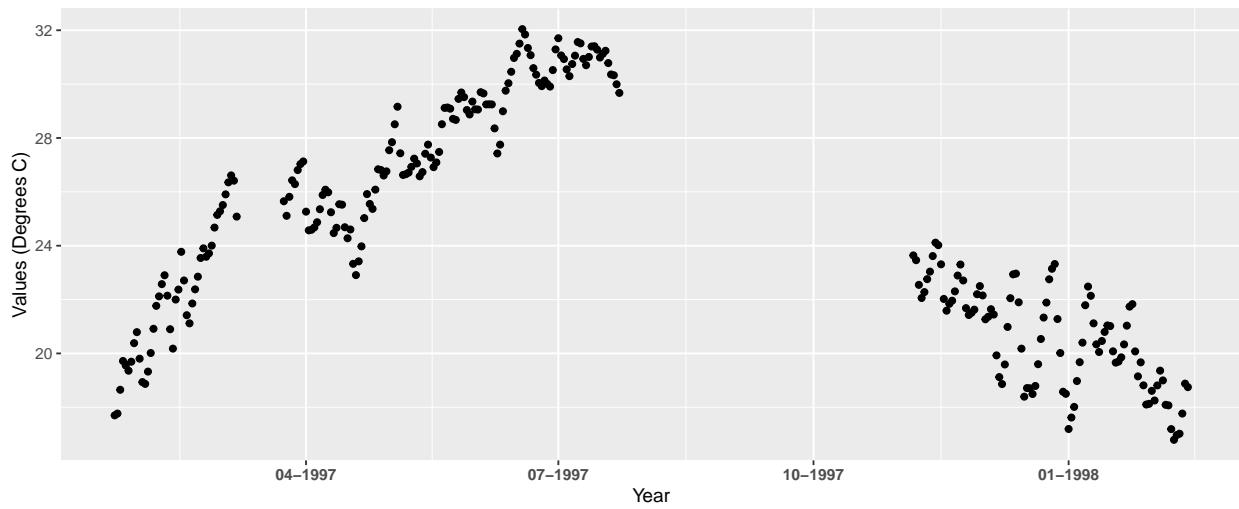


Scatter Plot of Excluded Monitoring Location Terra Ceia Aquatic Preserve
7 | National Water Information System | 023000825
(1 Unique Years)

Autoscale

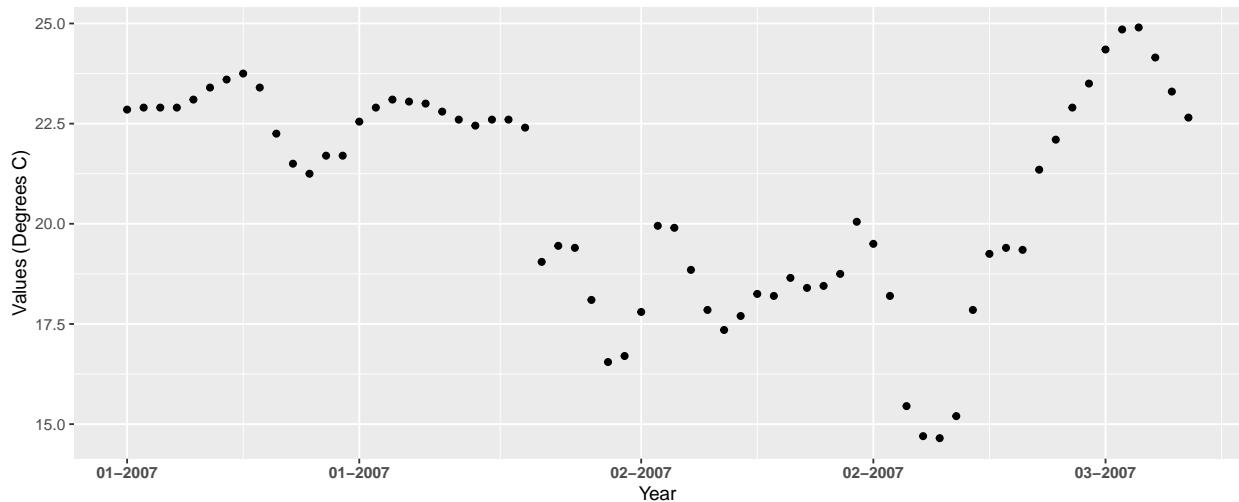


Scatter Plot of Excluded Monitoring Location Terra Ceia Aquatic Preserve
7 | National Water Information System | 02300084
(1 Unique Years)


Autoscale

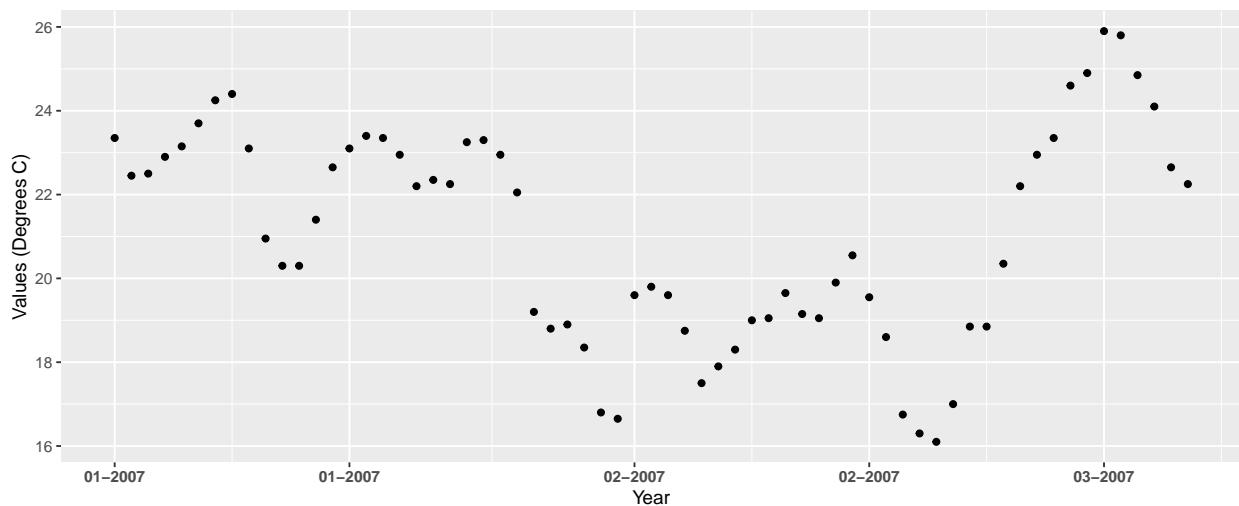

Scatter Plot of Excluded Monitoring Location Terra Ceia Aquatic Preserve
 7 | National Water Information System | 023000842
 (1 Unique Years)
 Autoscale

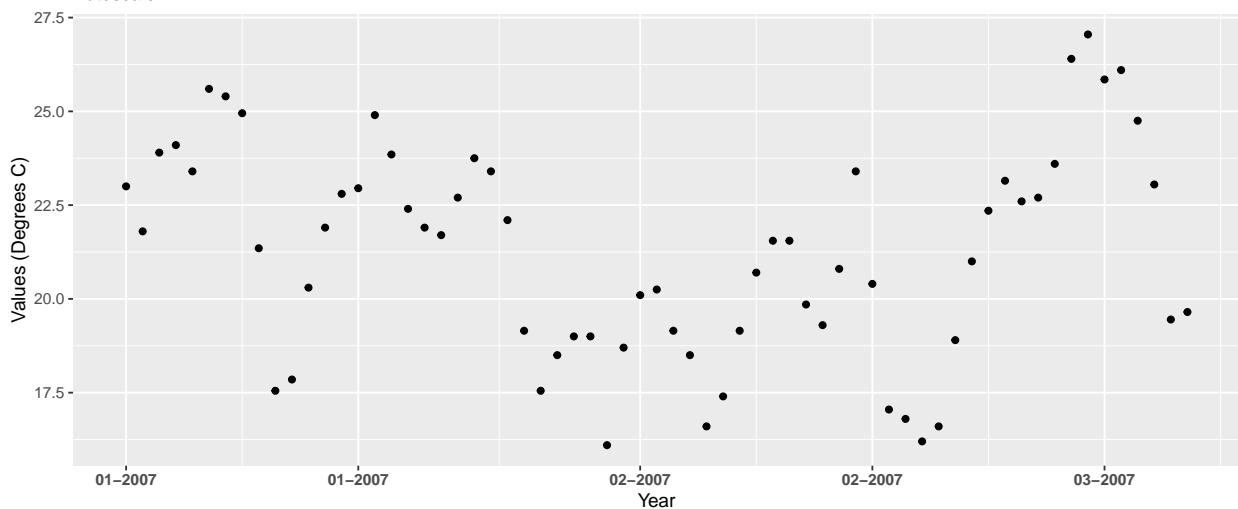

Scatter Plot of Excluded Monitoring Location Terra Ceia Aquatic Preserve
 473 | Terra Ceia Aquatic Preserve Continuous Water Quality Monitoring | TCBH
 (2 Unique Years)
 Autoscale

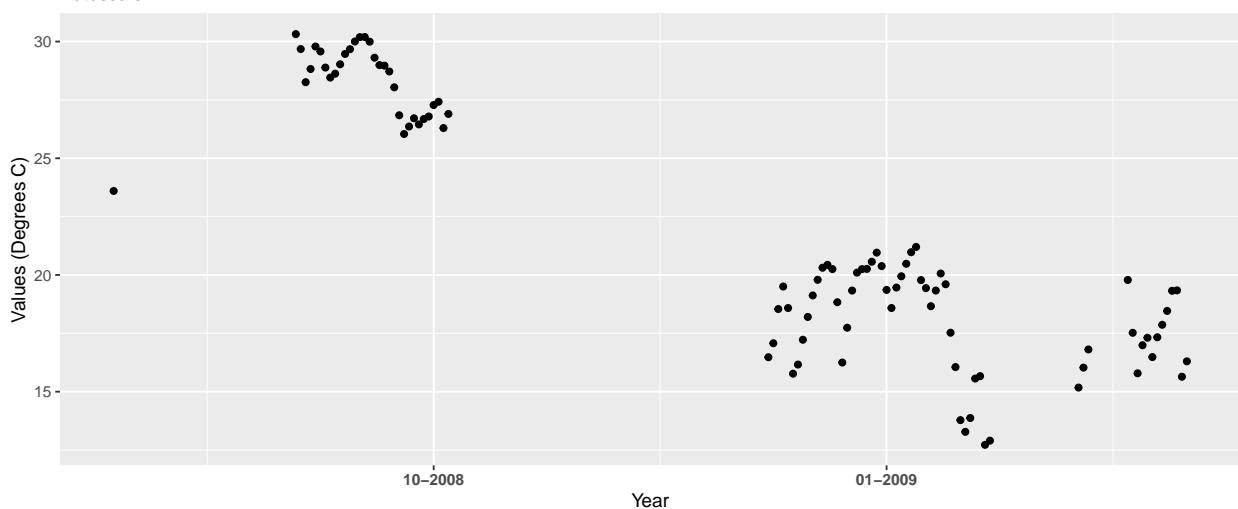

Appendix III: Monitoring Location Trendlines

The plots created in this section are designed to show the general trend of the data. Data is taken and grouped by `MonitoringID`. The trendlines on the plots are created using the Senn slope and intercept from the seasonal Kendall Tau analysis. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of TRUE for the desired monitoring location
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the minimum, mean, and standard deviation for the data to be used for y-axis scales

- Excludes the top 2% of values to reduce the impact of extreme outliers on the y-axis scale
- Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the plots
 - Set the plot type as a point plot with the size of the points
 - Add the linear trend
 - Create the title, x-axis, y-axis, and color fill labels
 - Set the y and x limits
 - Make the axis labels bold
 - Plot the arrangement as a set of panels

```

if(n==0){
  print("There are no monitoring locations that qualify.")
} else {
  for (i in 1:n) {
    year_lower <- min(data$Year[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i]])
    year_upper <- max(data$Year[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i]])
    min_RV <- min(data$ResultValue[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i]])
    mn_RV <- mean(data$ResultValue[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i] &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
    sd_RV <- sd(data$ResultValue[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i] &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
    x_scale <- ifelse(year_upper - year_lower > 30, 10, 5)
    y_scale <- mn_RV + 4 * sd_RV

    tau <- KT.Stats$tau[KT.Stats$MonitoringID == Mon_IDs[i]]
    s_slope <- KT.Stats$SennSlope[KT.Stats$MonitoringID == Mon_IDs[i]]
    s_int <- KT.Stats$SennIntercept[KT.Stats$MonitoringID == Mon_IDs[i]]
    trend <- KT.Stats$Trend[KT.Stats$MonitoringID == Mon_IDs[i]]
    p <- KT.Stats$p[KT.Stats$MonitoringID == Mon_IDs[i]]

    model <- lm(ResultValue ~ DecDate,
                data = data[data$Use_In_Analysis == TRUE &
                            data$MonitoringID == Mon_IDs[i]])
    m_int <- coef(model)[[1]]
    m_slope <- coef(model)[[2]]
    MA_name <- KT.Stats$ManagedAreaName[KT.Stats$MonitoringID == Mon_IDs[i]]
    Mon_name <- paste(KT.Stats$ProgramID[KT.Stats$MonitoringID == Mon_IDs[i]],
                      KT.Stats$ProgramName[KT.Stats$MonitoringID == Mon_IDs[i]],
                      KT.Stats$ProgramLocationID[KT.Stats$MonitoringID == Mon_IDs[i]],
                      sep = " | ")

    p1 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i], ],
                  aes(x = DecDate, y = ResultValue)) +
      geom_point(size = 1.5) +
      geom_abline(aes(slope=s_slope, intercept=s_int),

```

```

            color="red", size=1.5) +
  labs(subtitle = "Autoscale",
       x = "Year", y = paste0("Values (", unit, ")")) +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face="bold"))

p2 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i], ],
              aes(x = DecDate, y = ResultValue)) +
  geom_point(size = 1.5) +
  geom_abline(aes(slope=s_slope, intercept=s_int),
              color="red", size=1.5) +
  ylim(min_RV-0.1*y_scale, y_scale) +
  labs(subtitle = "Scaled to 4x Standard Deviation",
       x = "Year", y = paste0("Values (", unit, ")")) +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face="bold"))

KTset <- ggarrange(p1, p2, ncol = 1, heights = c(1, 1))

p0 <- ggplot() + labs(title = paste0("Data Points with Trendlines for ",
                                       MA_name, "\n", Mon_name),
                        subtitle =paste0("Senn Slope = ", s_slope,
                                       ", Senn Intercept = ", s_int,
                                       "\nTrend = ", trend,
                                       ", tau = ", tau,
                                       ", p = ", p,
                                       "\nLinear Trendline: ",
                                       "y = ", m_slope,"x + ",m_int)) +
  theme_bw() + theme(plot.title = element_text(face="bold"),
                     panel.border = element_blank(),
                     panel.grid.major = element_blank(),
                     panel.grid.minor = element_blank(),
                     axis.line = element_blank())



  print(ggarrange(p0, KTset, ncol = 1, heights = c(0.20, 1)))
}

}

```



**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255123081321300**

Senn Slope = 0, Senn Intercept = -92.5988888888889
 Trend = 0, tau = 0.0053, p = 0.9509
 Linear Trendline: $y = -0.0465003474642216x + 115.540330623649$

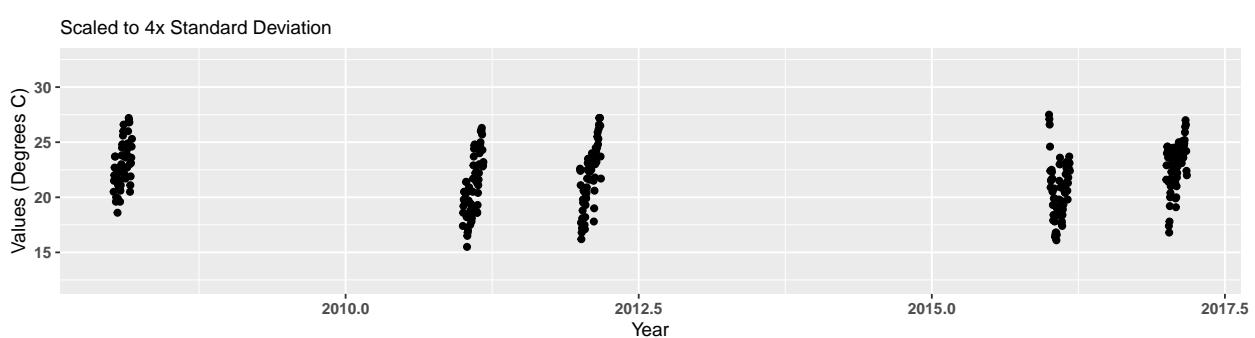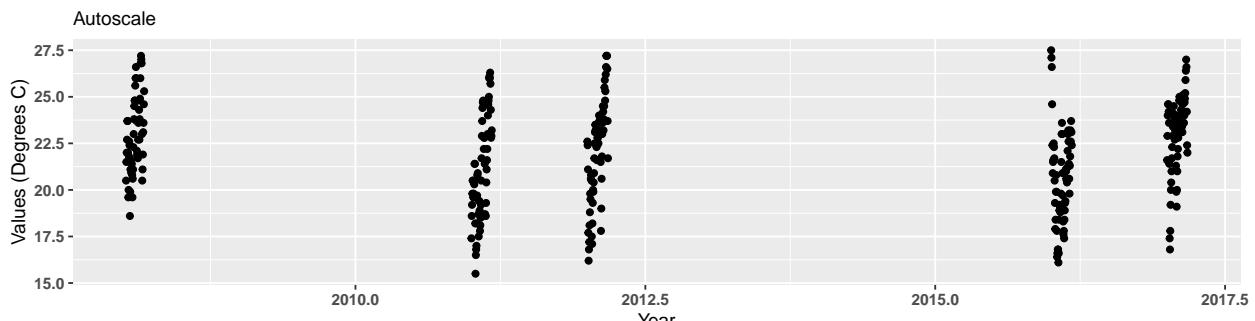



**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255432081303900**

Senn Slope = 0.0250000000000004, Senn Intercept = -240.4266666666667
 Trend = 0, tau = 0.0386, p = 0.3429
 Linear Trendline: $y = 0.0257017204541723x + -28.9065615768138$

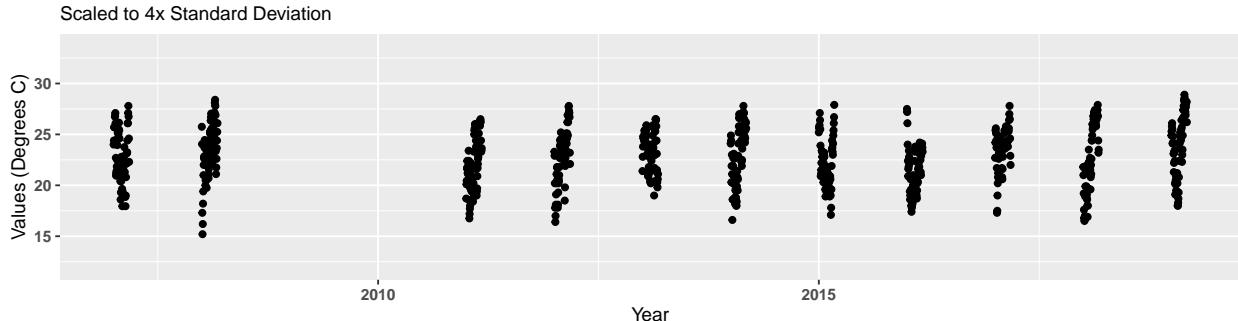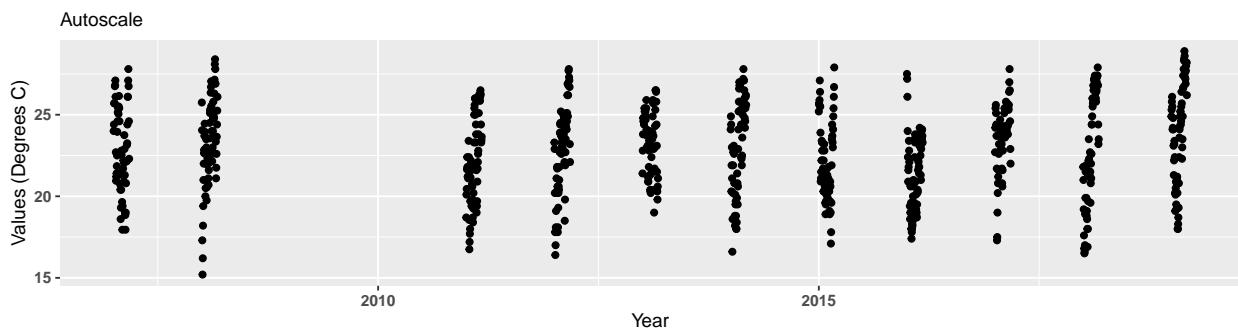



**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255534081324000**

Senn Slope = 0.0200000000000003, Senn Intercept = -175.9
Trend = 0, tau = 0.0321, p = 0.5943
Linear Trendline: $y = 0.0292351291564082x + -34.8063581635932$

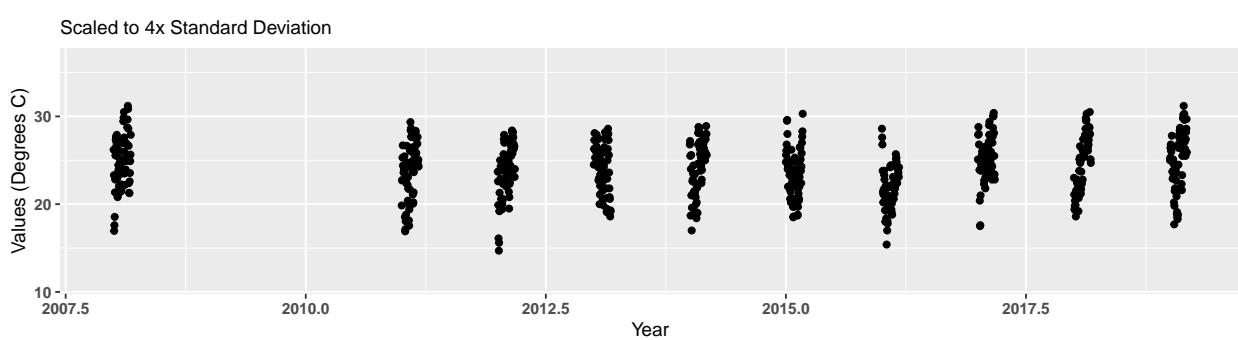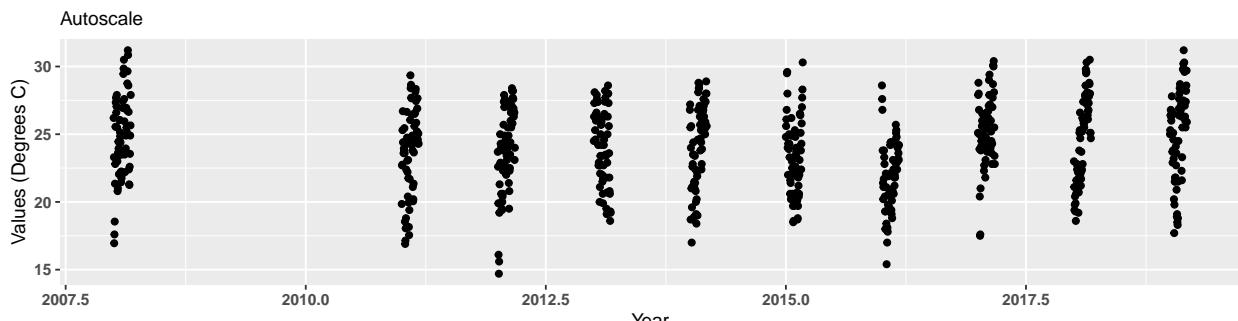

**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255654081350200**

Senn Slope = 0, Senn Intercept = -110.34166666666669
Trend = 0, tau = 0.0265, p = 0.8005
Linear Trendline: $y = 0.0056285261278695x + 11.3332478133654$

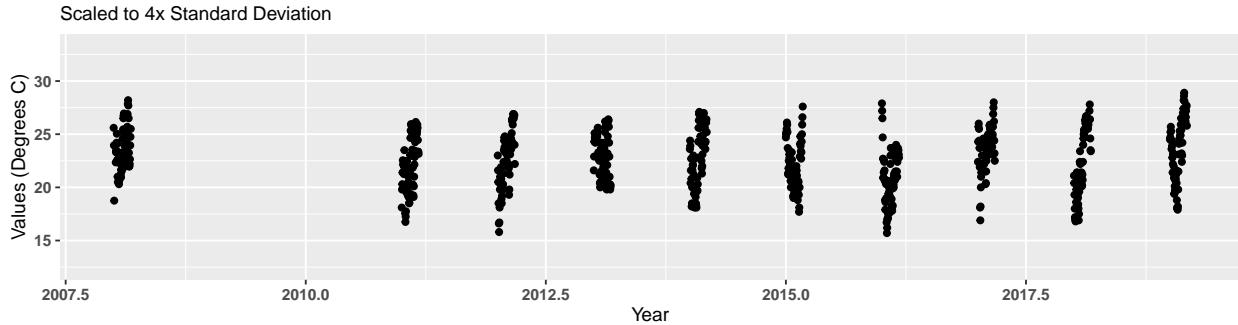
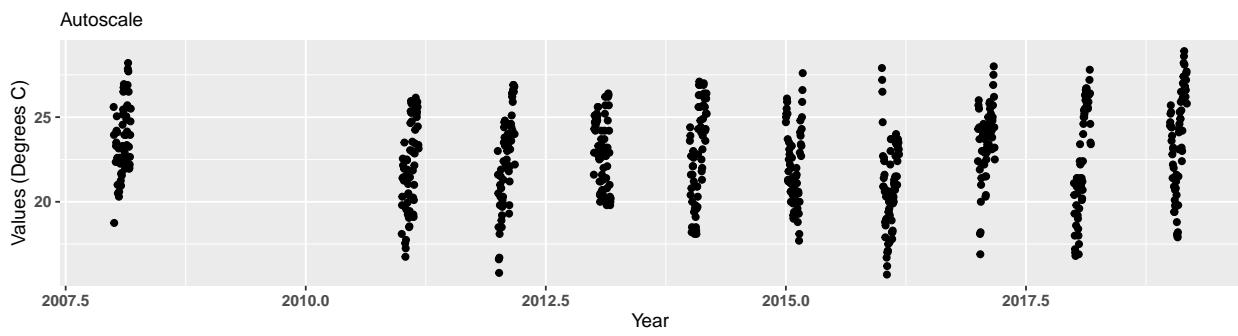


**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkfbfwq**

Senn Slope = 0.0375578703703704, Senn Intercept = -32.9927546296299

Trend = 1, tau = 0.0776, p = 0

Linear Trendline: $y = 0.0318200509402299x + -37.6723676368028$

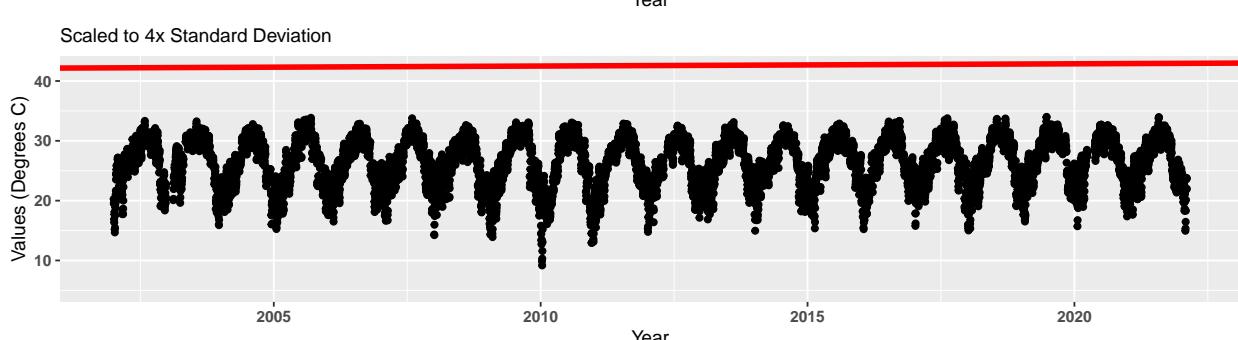
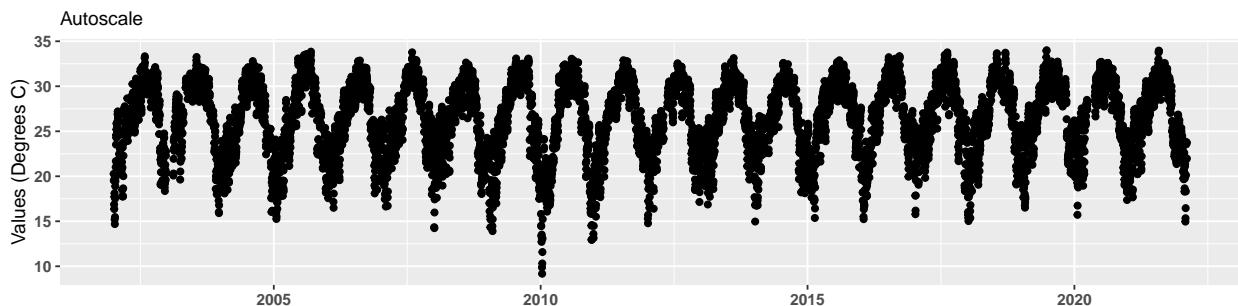


**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbfuwq**

Senn Slope = 0.0610677083333333, Senn Intercept = -92.5501844618057



Trend = 1, tau = 0.1283, p = 0

Linear Trendline: $y = 0.0568312120112824x + -88.2932645545778$

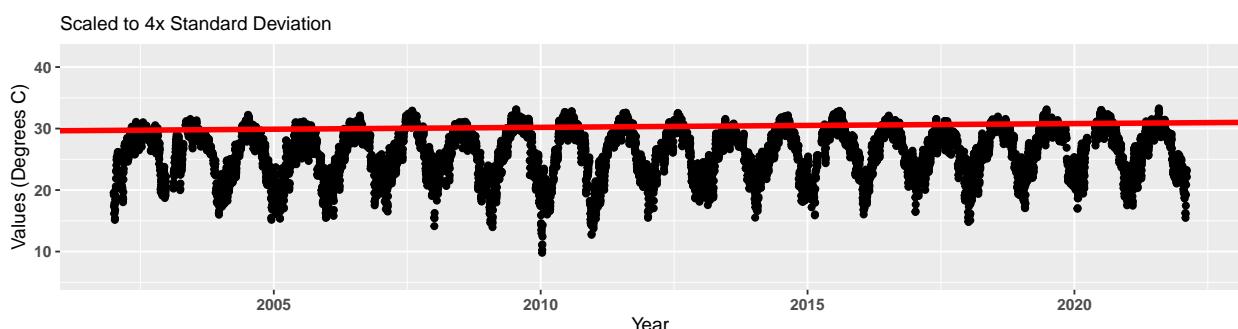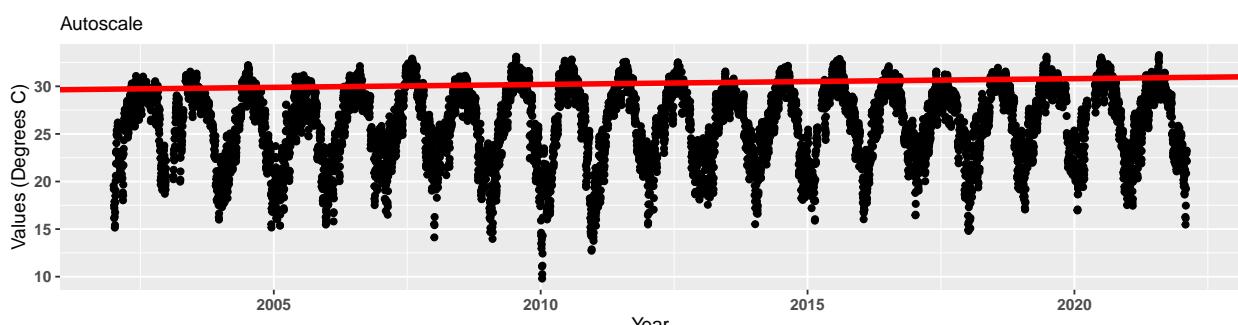



**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbmbwq**

Senn Slope = 0.0374999999999999, Senn Intercept = -41.4436708257019
 Trend = 1, tau = 0.0872, p = 0
 Linear Trendline: $y = 0.0342113955827212x + -42.7311386193628$

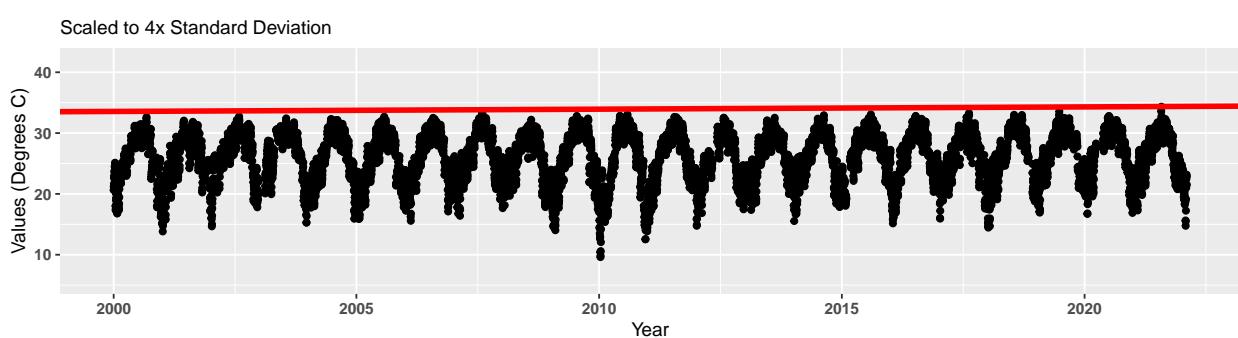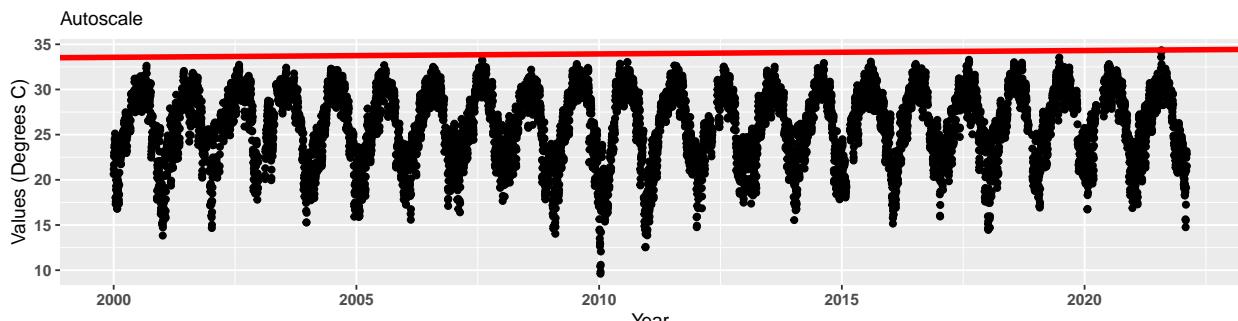

**Data Points with Trendlines for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbpbwq**

Senn Slope = 0.058333333333326, Senn Intercept = -65.6595844414901
 Trend = 1, tau = 0.0378, p = 0.008
 Linear Trendline: $y = 0.0344944067372512x + -43.0422221817821$

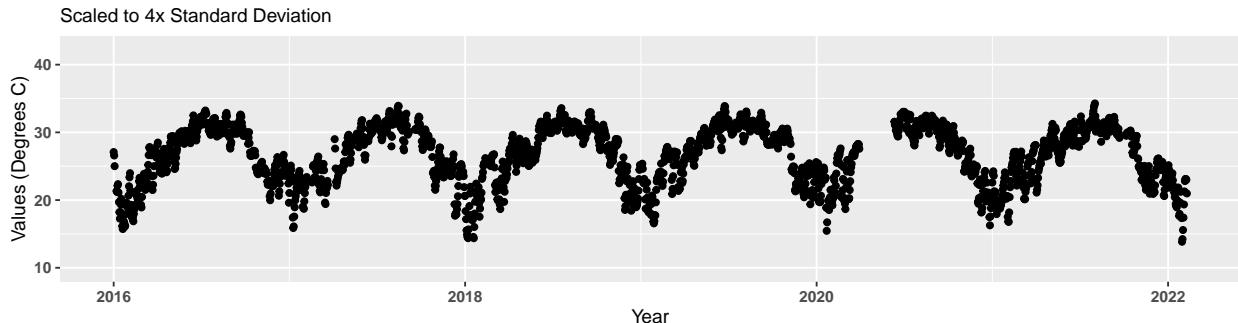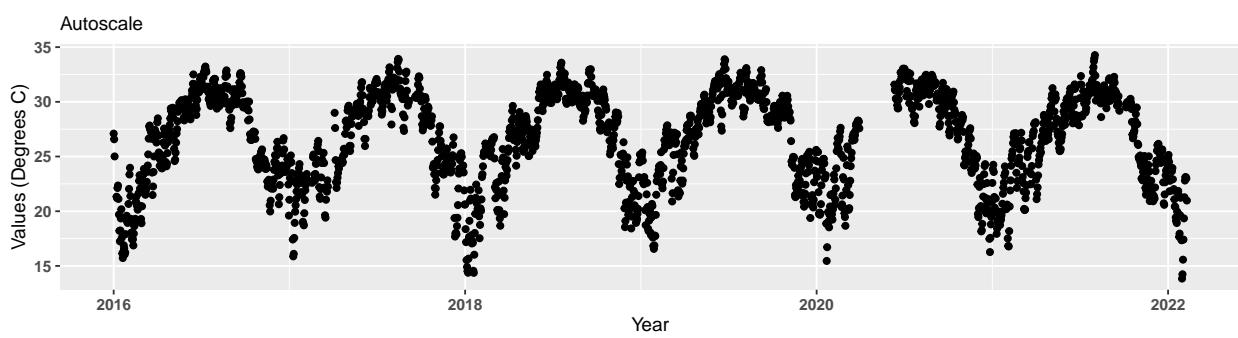


**Data Points with Trendlines for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB02**

Senn Slope = 0.0688060659789383, Senn Intercept = -95.4519196428573

Trend = 1, tau = 0.1427, p = 0

Linear Trendline: $y = 0.114136975688284x + -203.973014544609$

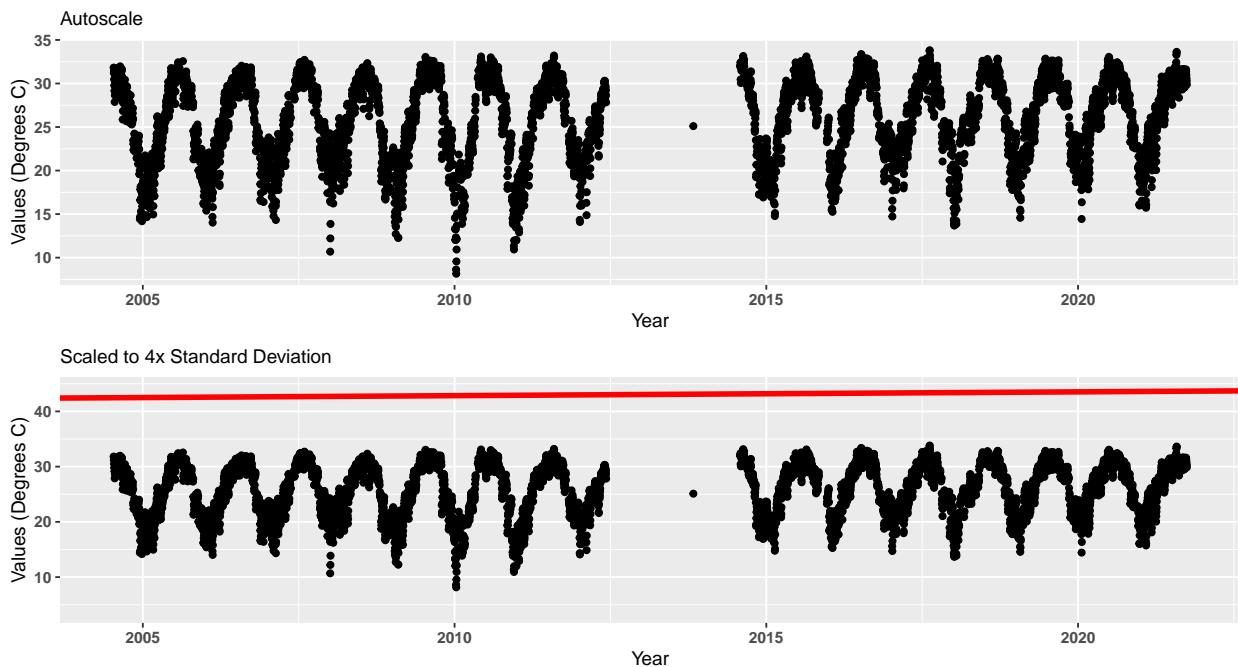


**Data Points with Trendlines for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB03**

Senn Slope = 0.041927083333334, Senn Intercept = -56.2465010181697

Trend = 1, tau = 0.0747, p = 0


Linear Trendline: $y = 0.0893673056314347x + -154.087703015426$

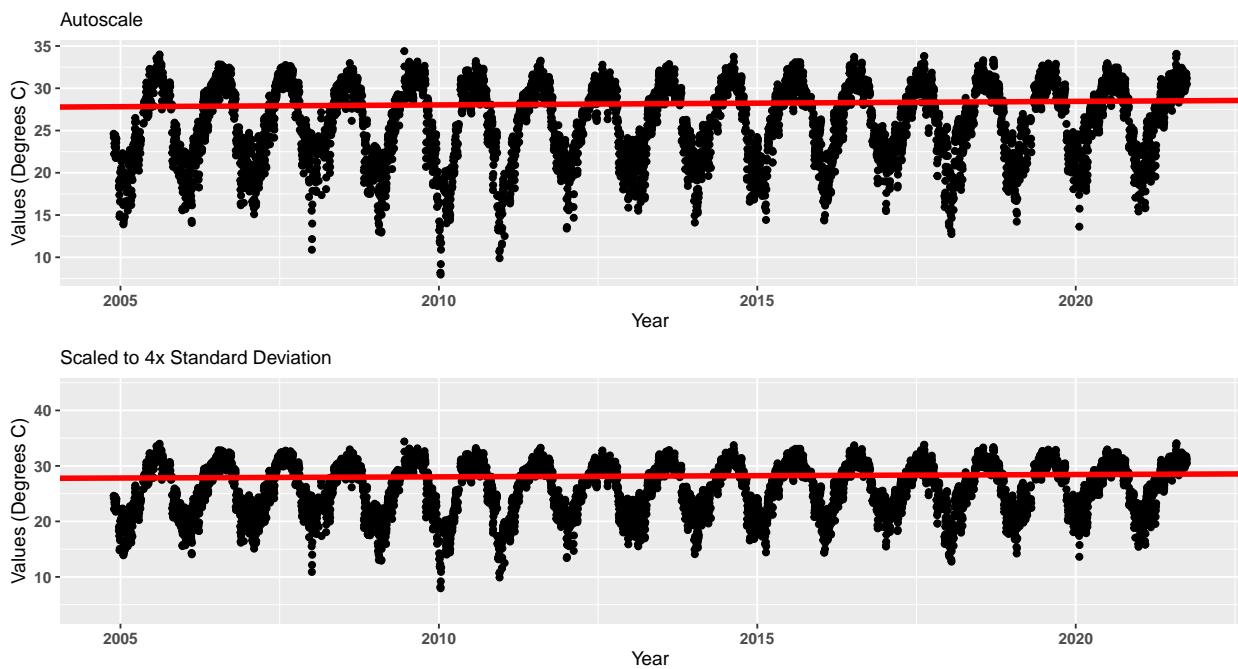

Data Points with Trendlines for Matlacha Pass Aquatic Preserve**512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP1A**


Senn Slope = 0.0460416666666667, Senn Intercept = -74.22256944444441

Trend = 1, tau = 0.0705, p = 0

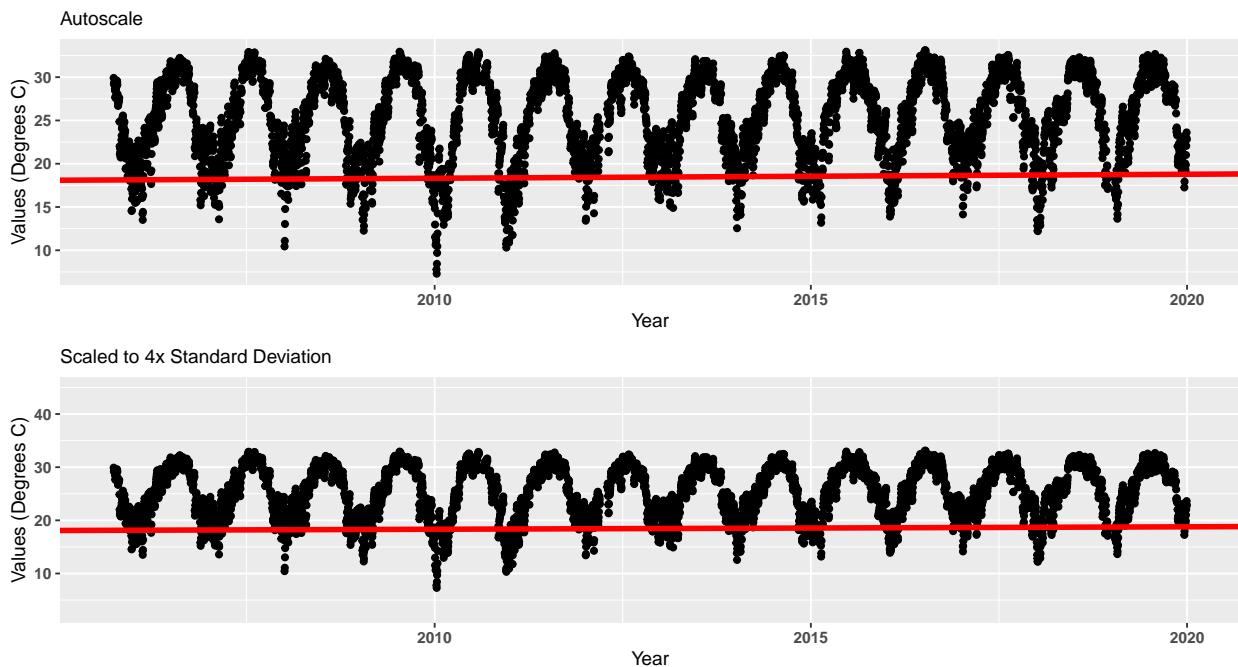Linear Trendline: $y = 0.129643587937811x + -235.528702542932$ **Data Points with Trendlines for Matlacha Pass Aquatic Preserve****512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP2B**

Senn Slope = 0.0488541666666667, Senn Intercept = -81.6283001893943

Trend = 1, tau = 0.0759, p = 0

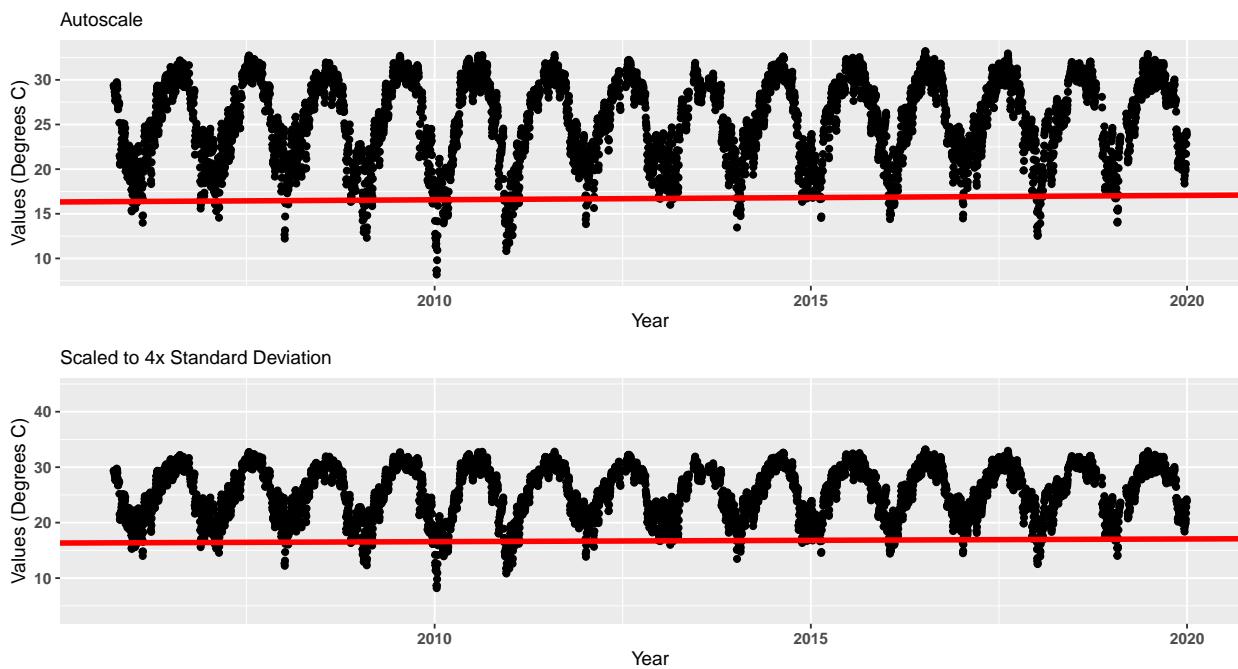Linear Trendline: $y = 0.116161376752401x + -208.361777126314$ 


Data Points with Trendlines for Matlacha Pass Aquatic Preserve

512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP3C

Senn Slope = 0.06336805555555555, Senn Intercept = -234.623090277777

Trend = 1, tau = 0.0927, p = 0

Linear Trendline: $y = 0.120337938106029x + -216.734890978652$

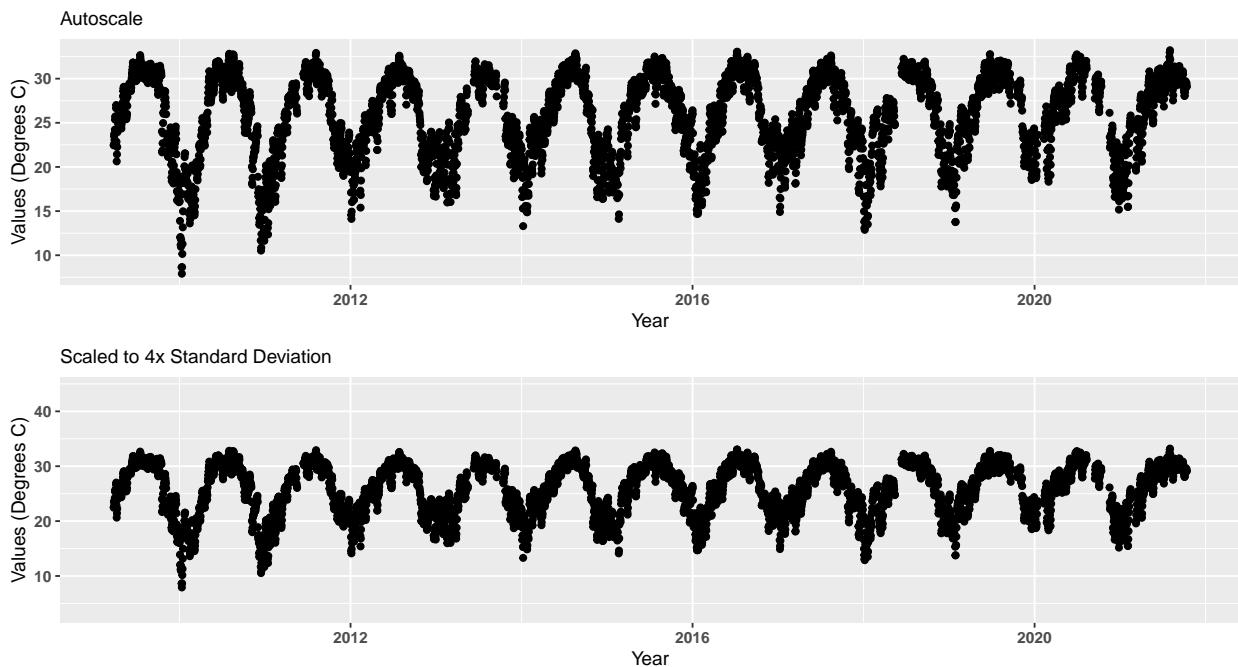


Data Points with Trendlines for Pinellas County Aquatic Preserve

5 | National Data Buoy Center | CWBF1

Senn Slope = 0.0594880045080392, Senn Intercept = -133.32746184113

Trend = 1, tau = 0.0984, p = 0

Linear Trendline: $y = 0.131289915137453x + -239.808532356138$

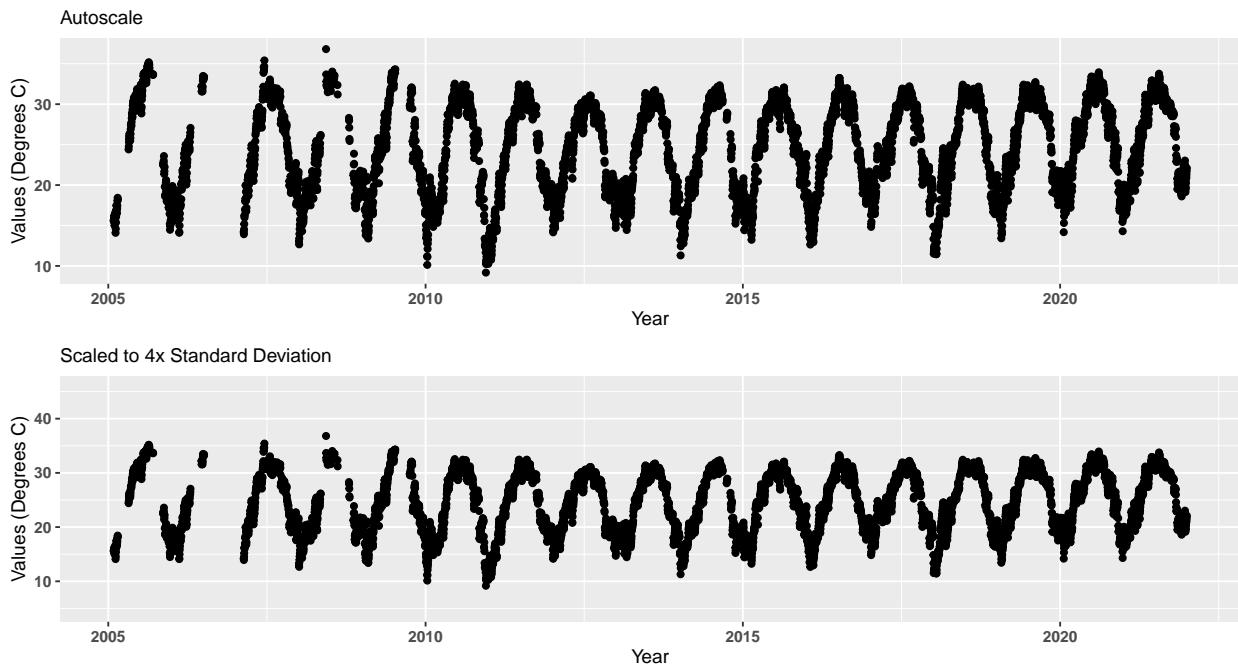


Data Points with Trendlines for Rookery Bay Aquatic Preserve

354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkblhwq

Senn Slope = 0.0451388888888893, Senn Intercept = -61.4456539351849

Trend = 1, tau = 0.0993, p = 0

Linear Trendline: $y = 0.0463405688518926x + -67.1077986103539$

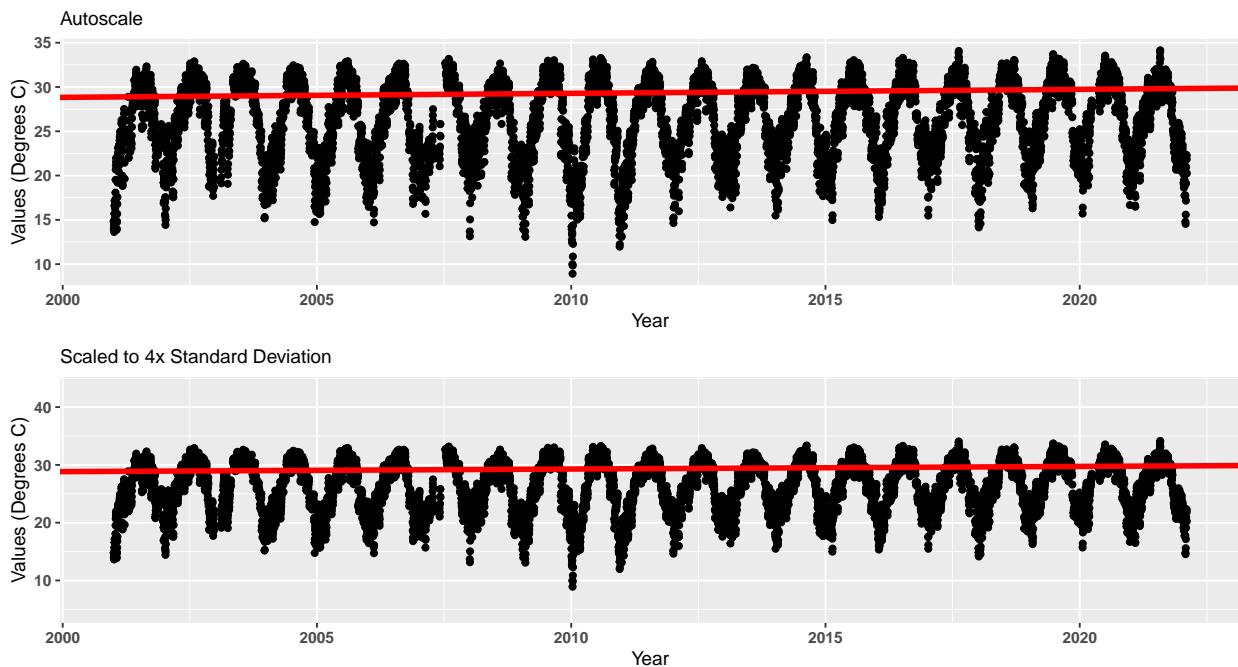


Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve

7 | National Water Information System | 255123081321300

Senn Slope = 0, Senn Intercept = -92.5988888888889


Trend = 0, tau = 0.0053, p = 0.9509

Linear Trendline: $y = -0.0465003474642216x + 115.540330623649$

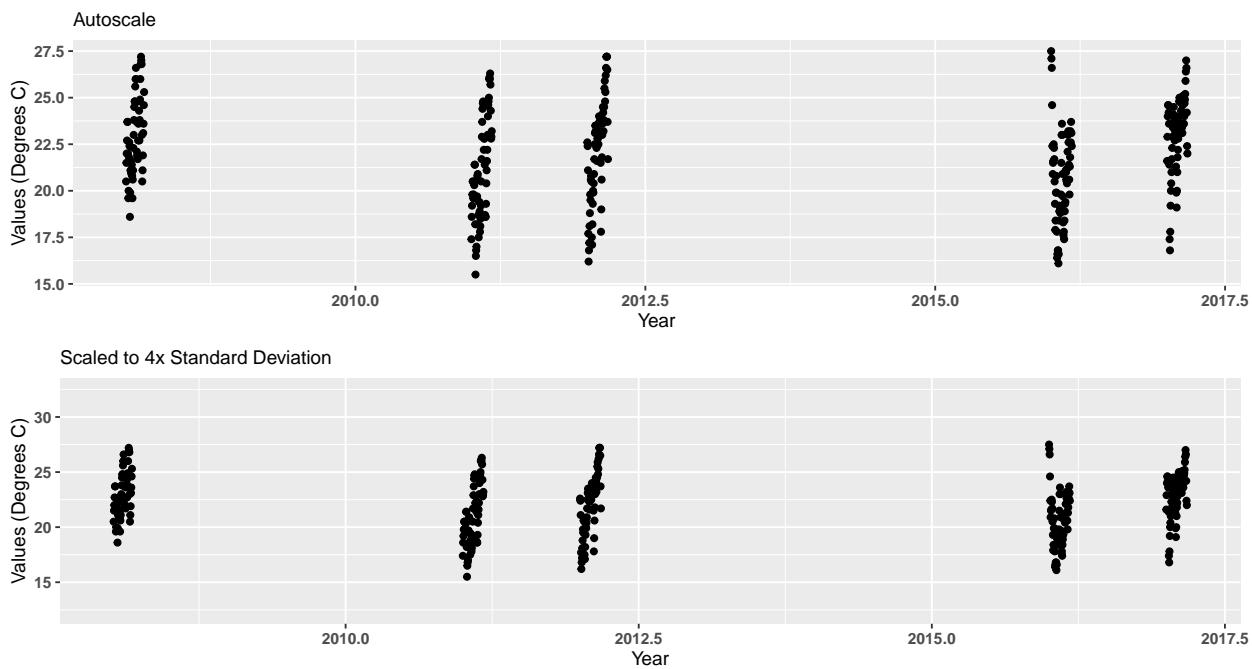


**Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255432081303900**

Senn Slope = 0.0250000000000004, Senn Intercept = -240.4266666666667
Trend = 0, tau = 0.0386, p = 0.3429
Linear Trendline: $y = 0.0257017204541723x + -28.9065615768138$

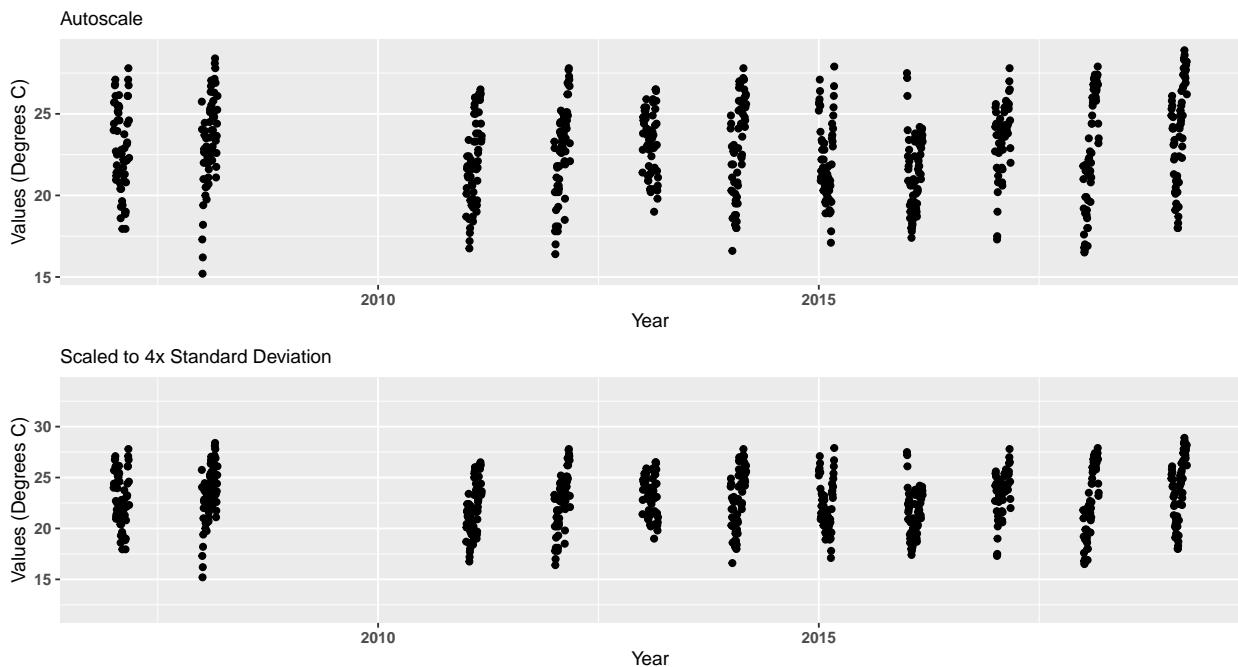


**Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255534081324000**

Senn Slope = 0.0200000000000003, Senn Intercept = -175.9
Trend = 0, tau = 0.0321, p = 0.5943
Linear Trendline: $y = 0.0292351291564082x + -34.8063581635932$

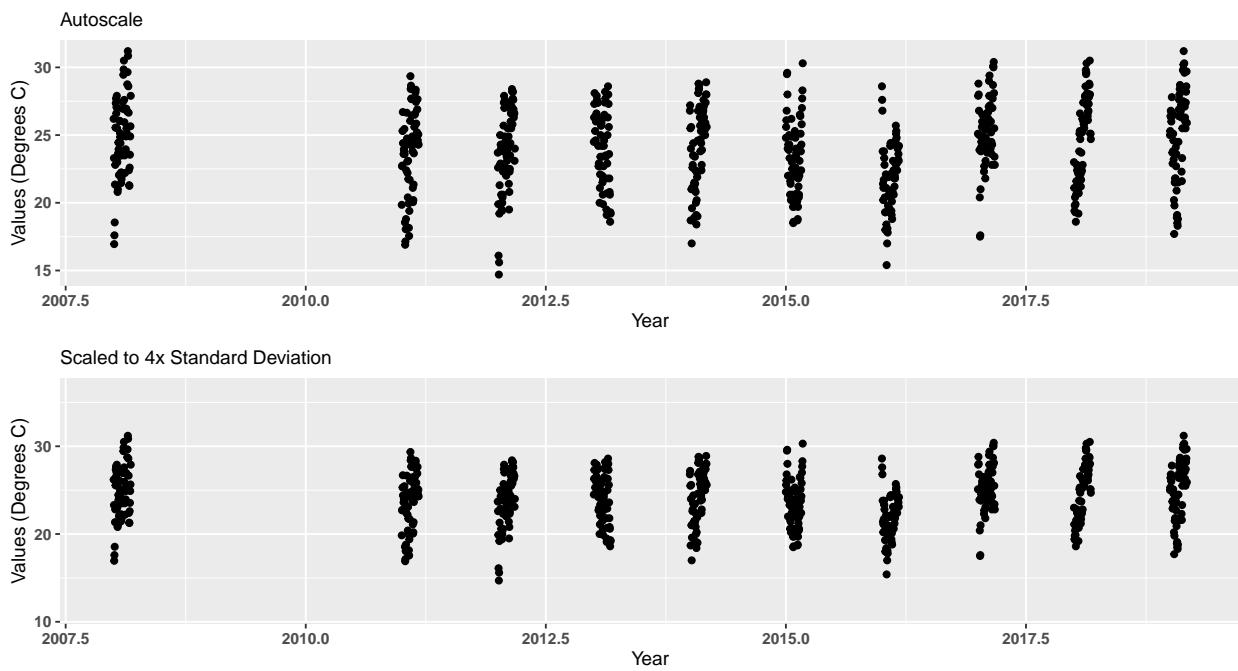


**Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255654081350200**

Senn Slope = 0, Senn Intercept = -110.3416666666669
 Trend = 0, tau = 0.0265, p = 0.8005
 Linear Trendline: $y = 0.0056285261278695x + 11.3332478133654$

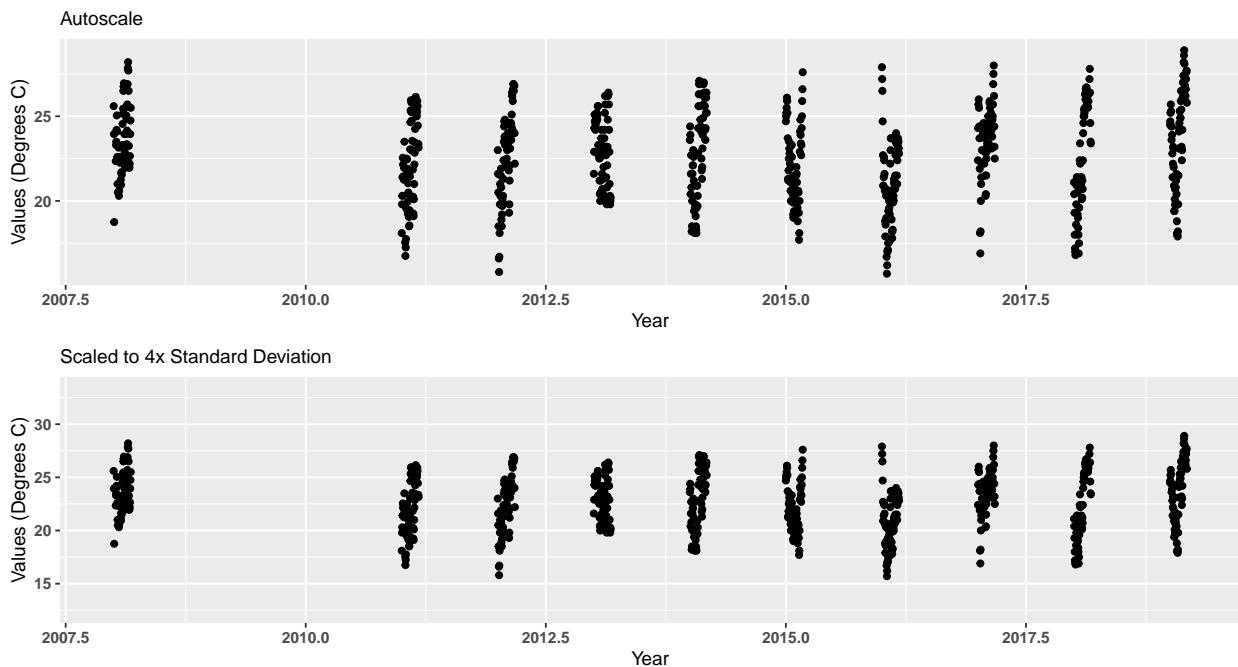


**Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfbwq**


Senn Slope = 0.0375578703703704, Senn Intercept = -32.9927546296299
 Trend = 1, tau = 0.0776, p = 0
 Linear Trendline: $y = 0.0318200509402299x + -37.6723676368028$

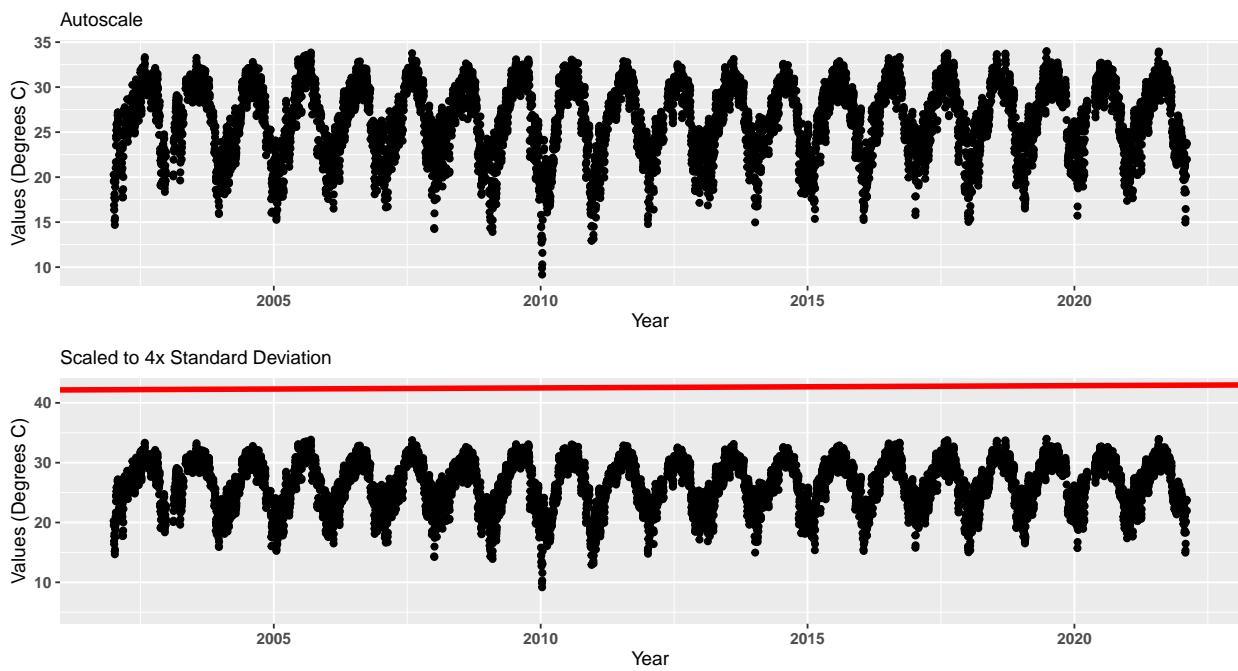


Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfuwq
 Senn Slope = 0.0610677083333333, Senn Intercept = -92.5501844618057
 Trend = 1, tau = 0.1283, p = 0
 Linear Trendline: $y = 0.0568312120112824x + -88.2932645545778$

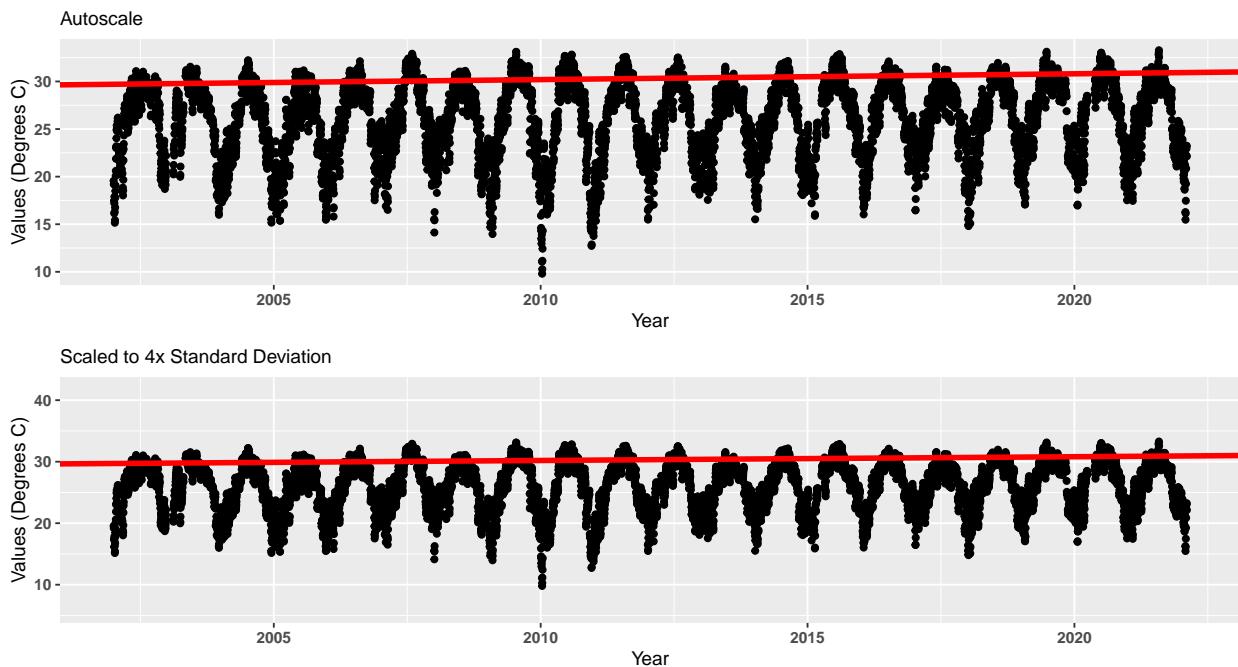


Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq
 Senn Slope = 0.045138888888893, Senn Intercept = -61.4456539351849
 Trend = 1, tau = 0.0993, p = 0
 Linear Trendline: $y = 0.0463405688518926x + -67.1077986103539$

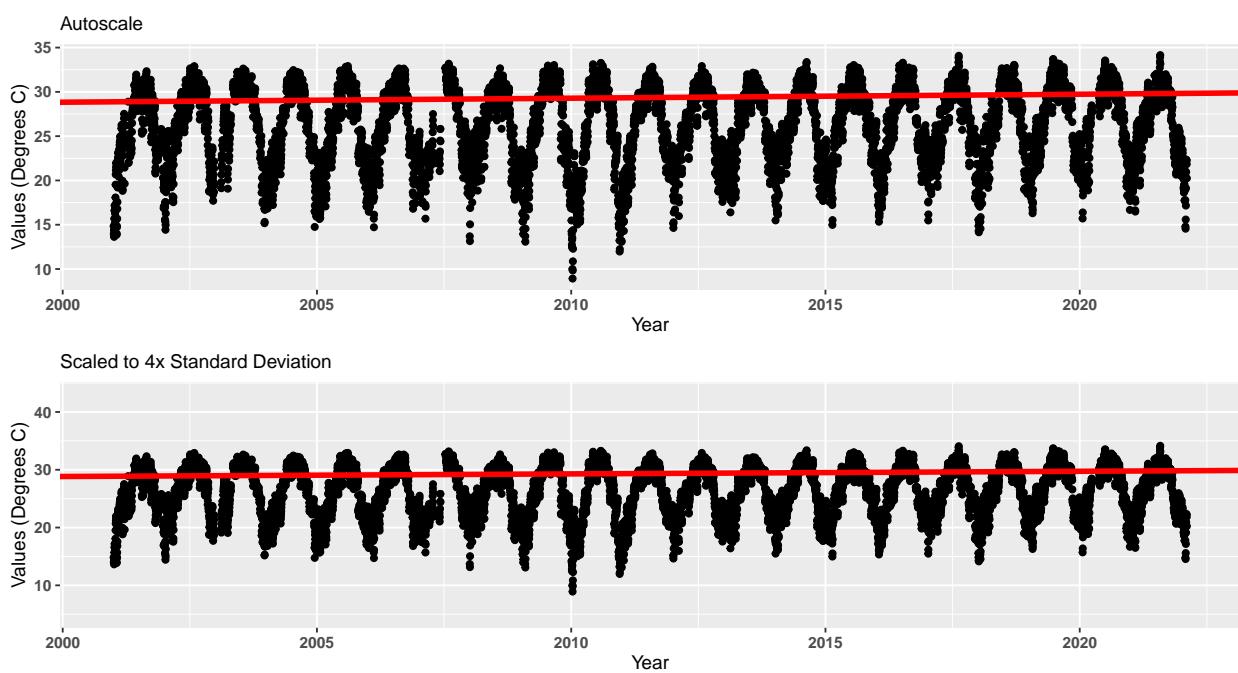


Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbmbwq
 Senn Slope = 0.0374999999999999, Senn Intercept = -41.4436708257019
 Trend = 1, tau = 0.0872, p = 0
 Linear Trendline: $y = 0.0342113955827212x + -42.7311386193628$

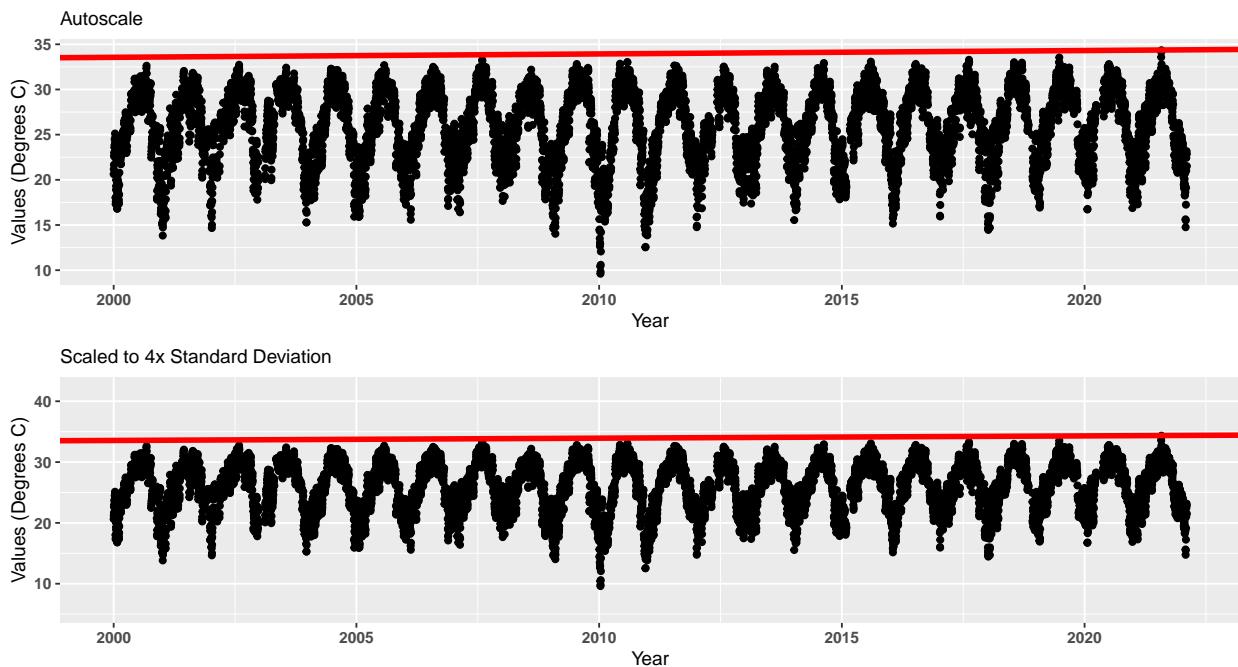

Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbpbwq
 Senn Slope = 0.058333333333326, Senn Intercept = -65.6595844414901
 Trend = 1, tau = 0.0378, p = 0.008
 Linear Trendline: $y = 0.0344944067372512x + -43.0422221817821$

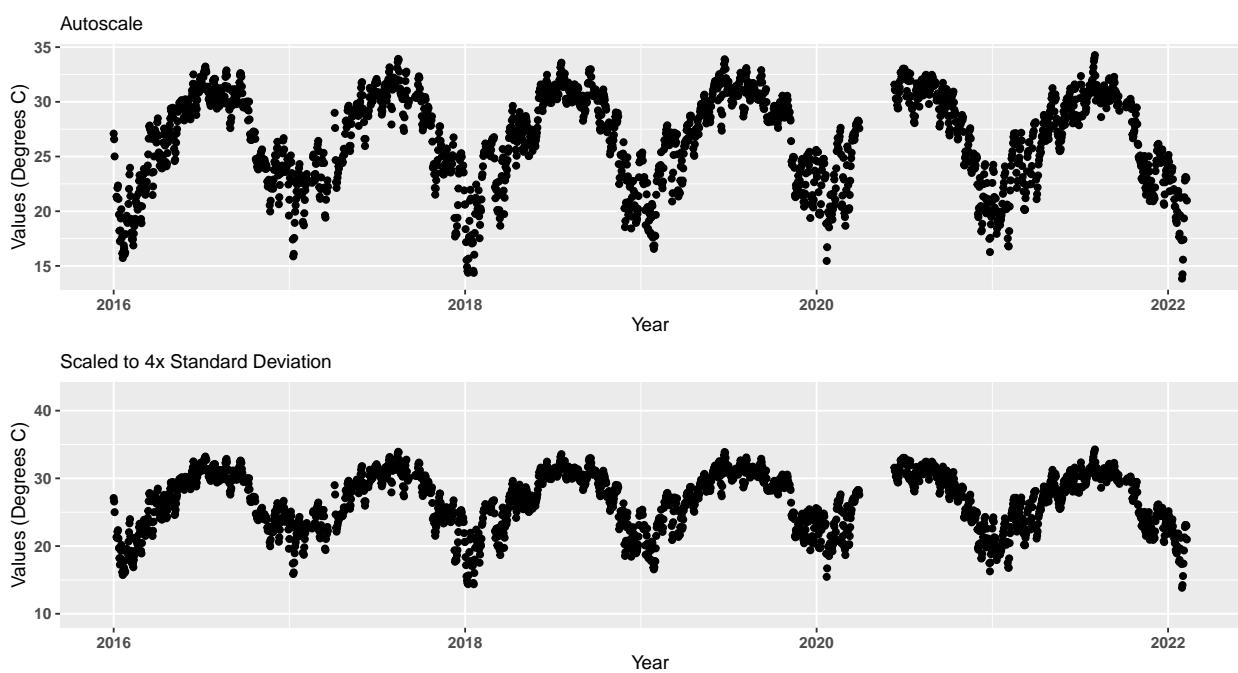

Data Points with Trendlines for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbuhwq
 Senn Slope = -0.0687500000000014, Senn Intercept = 353.253038194444
 Trend = 0, tau = -0.0323, p = 0.0938
 Linear Trendline: $y = 0.227542917118217x + -428.409602865763$

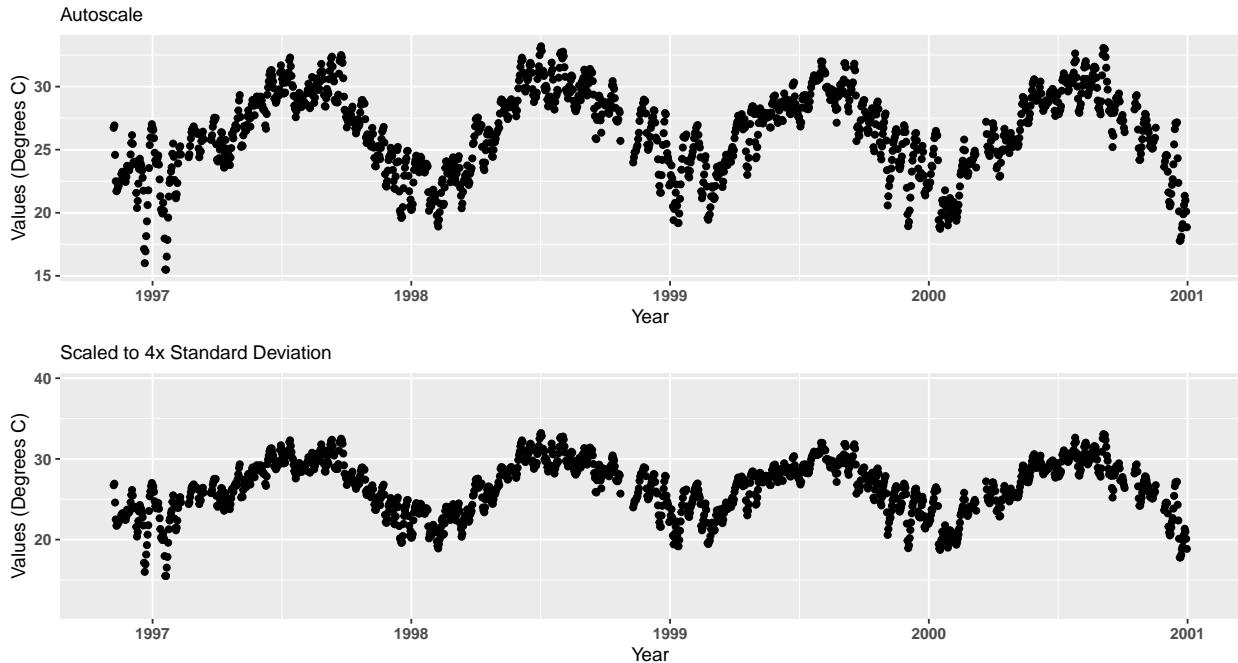

Appendix IV: Monitoring Location Summary Box Plots

Data is taken and grouped by `MonitoringID`. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of TRUE for the desired monitoring location
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the minimum, mean, and standard deviation for the data to be used for y-axis scales
 - Excludes the top 2% of values to reduce the impact of extreme outliers on the y-axis scale
4. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the box plots
5. Set the plot type as a box plot with the size of the outlier points
6. Create the title, x-axis, y-axis, and color fill labels
7. Set the y and x limits
8. Make the axis labels bold
9. Plot the arrangement as a set of panels

The following plots are arranged by `MonitoringID` with data grouped by `Year`, then `Year` and `Month`, then finally `Month` only. Each program area will have 3 sets of plots, each with 3 panels in them. Each panel goes as follows:

1. Y-axis autoscaled
2. Y-axis set to be mean + 4 times the standard deviation

3. Y-axis set to be mean + 4 times the standard deviation for most recent 10 years of data

```
if(n==0){
  print("There are no monitoring locations that qualify.")
} else {
  for (i in 1:n) {
    year_lower <- min(data$Year[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i]])
    year_upper <- max(data$Year[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i]])
    min_RV <- min(data$ResultValue[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i]])
    mn_RV <- mean(data$ResultValue[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i] &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
    sd_RV <- sd(data$ResultValue[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i] &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
    x_scale <- ifelse(year_upper - year_lower > 30, 10, 5)
    y_scale <- mn_RV + 4 * sd_RV
    MA_name <- KT.Stats$ManagedAreaName[KT.Stats$MonitoringID == Mon_IDs[i]]
    Mon_name <- paste(KT.Stats$ProgramID[KT.Stats$MonitoringID == Mon_IDs[i]],
                      KT.Stats$ProgramName[KT.Stats$MonitoringID == Mon_IDs[i]],
                      KT.Stats$ProgramLocationID[KT.Stats$MonitoringID == Mon_IDs[i]],
                      sep = " | ")
    ##Year plots
    p1 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i], ],
                  aes(x = Year, y = ResultValue, group = Year)) +
      geom_boxplot(outlier.size = 0.5) +
      labs(subtitle = "Autoscale",
           x = "Year", y = paste0("Values (", unit, ")")) +
      scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                         breaks = rev(seq(year_upper,
                                          year_lower, -x_scale))) +
      theme(axis.text.x = element_text(face = "bold"),
            axis.text.y = element_text(face = "bold"))

    p2 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                                data$MonitoringID == Mon_IDs[i], ],
                  aes(x = Year, y = ResultValue, group = Year)) +
      geom_boxplot(outlier.size = 0.5) +
      labs(subtitle = "Scaled to 4x Standard Deviation",
           x = "Year", y = paste0("Values (", unit, ")")) +
      ylim(min_RV, y_scale) +
      scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                         breaks = rev(seq(year_upper,
                                          year_lower, -x_scale))) +
      theme(axis.text.x = element_text(face = "bold"),
            axis.text.y = element_text(face = "bold"))
```

```

p3 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i] &
                           data$Year>=year_upper-10, ],
              aes(x = Year, y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
       x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(year_upper - 10.5, year_upper + 1),
                     breaks = rev(seq(year_upper, year_upper - 10,-2))) +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

Yset <- ggarrange(p1, p2, p3, ncol = 1)

p0 <- ggplot() + labs(title = paste0("Summary Box Plots for ",
                                       MA_name, "\n", Mon_name),
                        subtitle = "By Year") +
  theme_bw() + theme(plot.title = element_text(face="bold"),
                      panel.border = element_blank(),
                      panel.grid.major = element_blank(),
                      panel.grid.minor = element_blank(), axis.line = element_blank())

## Year & Month Plots
p4 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i], ],
              aes(x = YearMonthDec, y = ResultValue,
                  group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale",
       x = "Year", y = paste0("Values (", unit, ")"), color = "Month") +
  scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                     breaks = rev(seq(year_upper,
                                      year_lower, -x_scale))) +
  theme(legend.position = "none",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p5 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i], ],
              aes(x = YearMonthDec, y = ResultValue,
                  group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation",
       x = "Year", y = paste0("Values (", unit, ")"), color = "Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                     breaks = rev(seq(year_upper,
                                      year_lower, -x_scale))) +
  theme(legend.position = "top", legend.box = "horizontal",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

```

```

guides(color = guide_legend(nrow = 1))

p6 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i], ],
              aes(x = YearMonthDec, y = ResultValue,
                  group = YearMonth, color = as.factor(Month))
            )) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
       x = "Year", y = paste0("Values (", unit, ")"), color = "Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(year_upper - 10.5, year_upper + 1),
                     breaks = rev(seq(year_upper, year_upper - 10, -2))) +
  theme(legend.position = "none",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

leg1 <- get_legend(p5)
YMset <- ggarrange(leg1, p4, p5 + theme(legend.position = "none"), p6,
                   ncol = 1, heights = c(0.1, 1, 1, 1))

p00 <- ggplot() + labs(title = paste0("Summary Box Plots for ",
                                         MA_name, "\n", Mon_name),
                         subtitle = "By Year & Month") + theme_bw() +
  theme(plot.title = element_text(face="bold"),
        panel.border = element_blank(),
        panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

## Month Plots
p7 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i], ],
              aes(x = Month, y = ResultValue,
                  group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale",
       x = "Month", y = paste0("Values (", unit, ")"), fill = "Month") +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme(legend.position = "none",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p8 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i], ],
              aes(x = Month, y = ResultValue,
                  group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation",
       x = "Month", y = paste0("Values (", unit, ")"), fill = "Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme(legend.position = "top", legend.box = "horizontal",
        axis.text.x = element_text(face = "bold"),

```

```

    axis.text.y = element_text(face = "bold")) +
guides(fill = guide_legend(nrow = 1))

p9 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                           data$MonitoringID == Mon_IDs[i] &
                           data$Year >= year_upper - 10, ],
              aes(x = Month, y = ResultValue,
                  group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
       x = "Month", y = paste0("Values (", unit, ")"), fill = "Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme(legend.position = "none",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))


leg2 <- get_legend(p8)
Mset <- ggarrange(leg2, p7, p8 + theme(legend.position = "none"), p9,
                  ncol = 1, heights = c(0.1, 1, 1, 1))

p000 <- ggplot() + labs(title = paste0("Summary Box Plots for ",
                                         MA_name, "\n", Mon_name),
                           subtitle = "By Month") + theme_bw() +
  theme(plot.title = element_text(face="bold"),
        panel.border = element_blank(),
        panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())


print(ggarrange(p0, Yset, ncol = 1, heights = c(0.1, 1)))
print(ggarrange(p00, YMset, ncol = 1, heights = c(0.1, 1)))
print(ggarrange(p000, Mset, ncol = 1, heights = c(0.1, 1)))
}
}
}
```

Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255123081321300

By Year

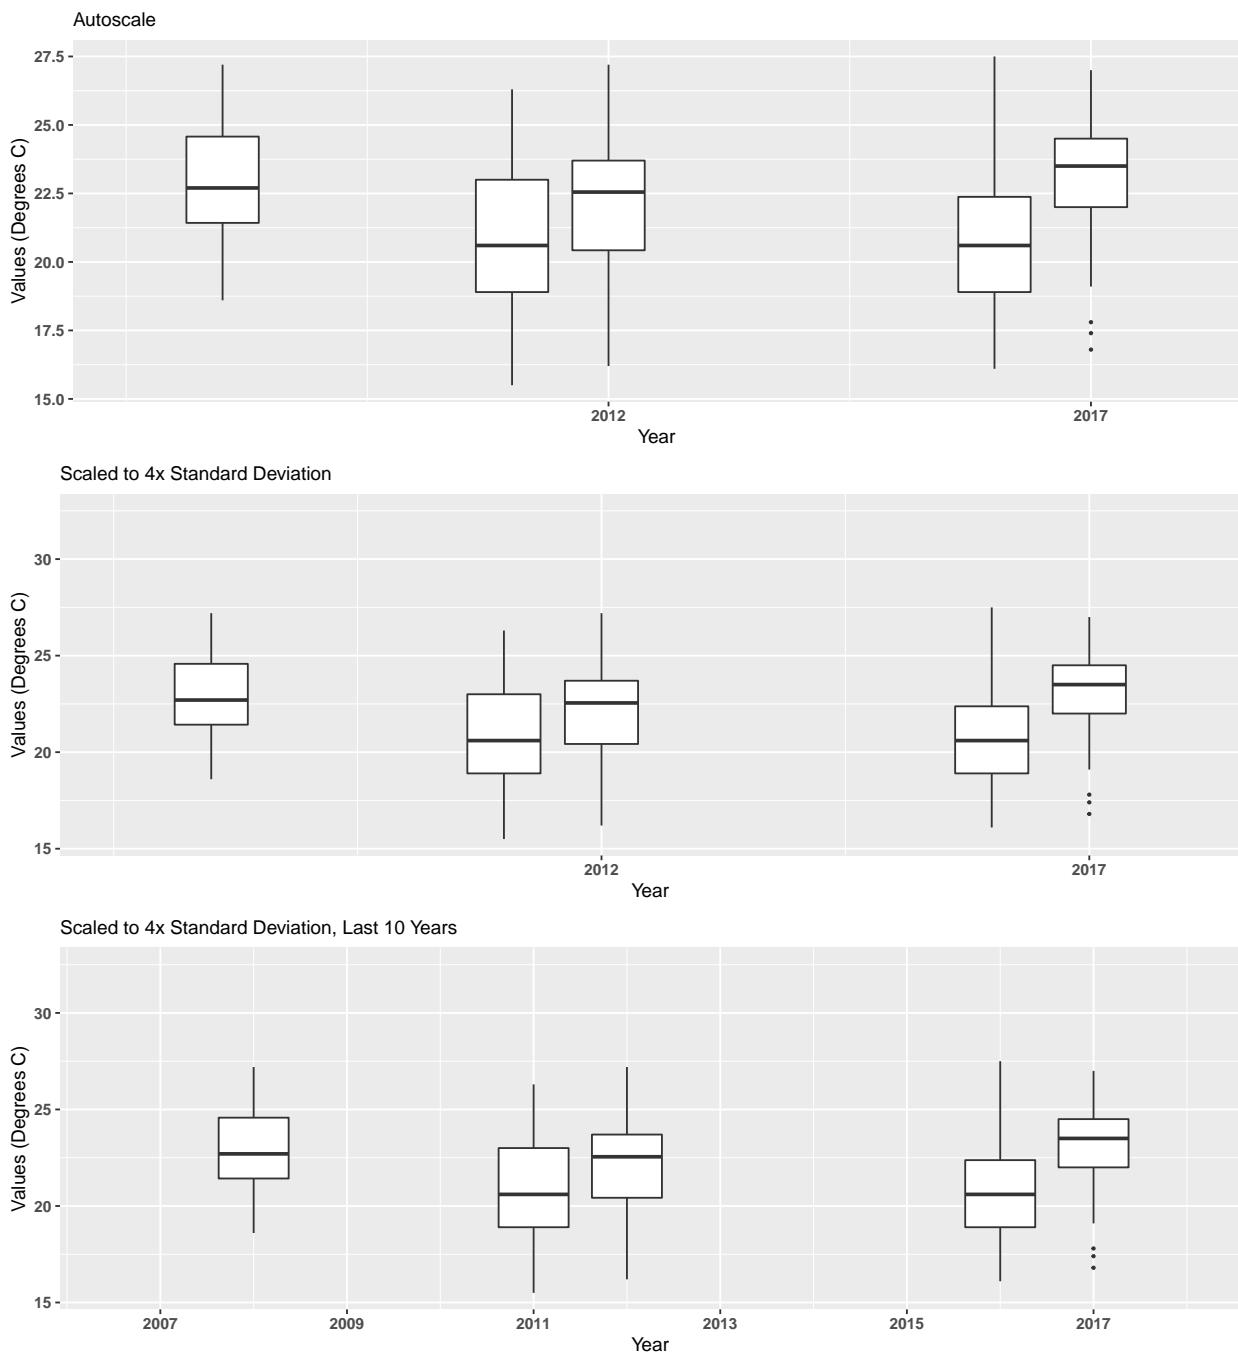


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255123081321300
By Year & Month

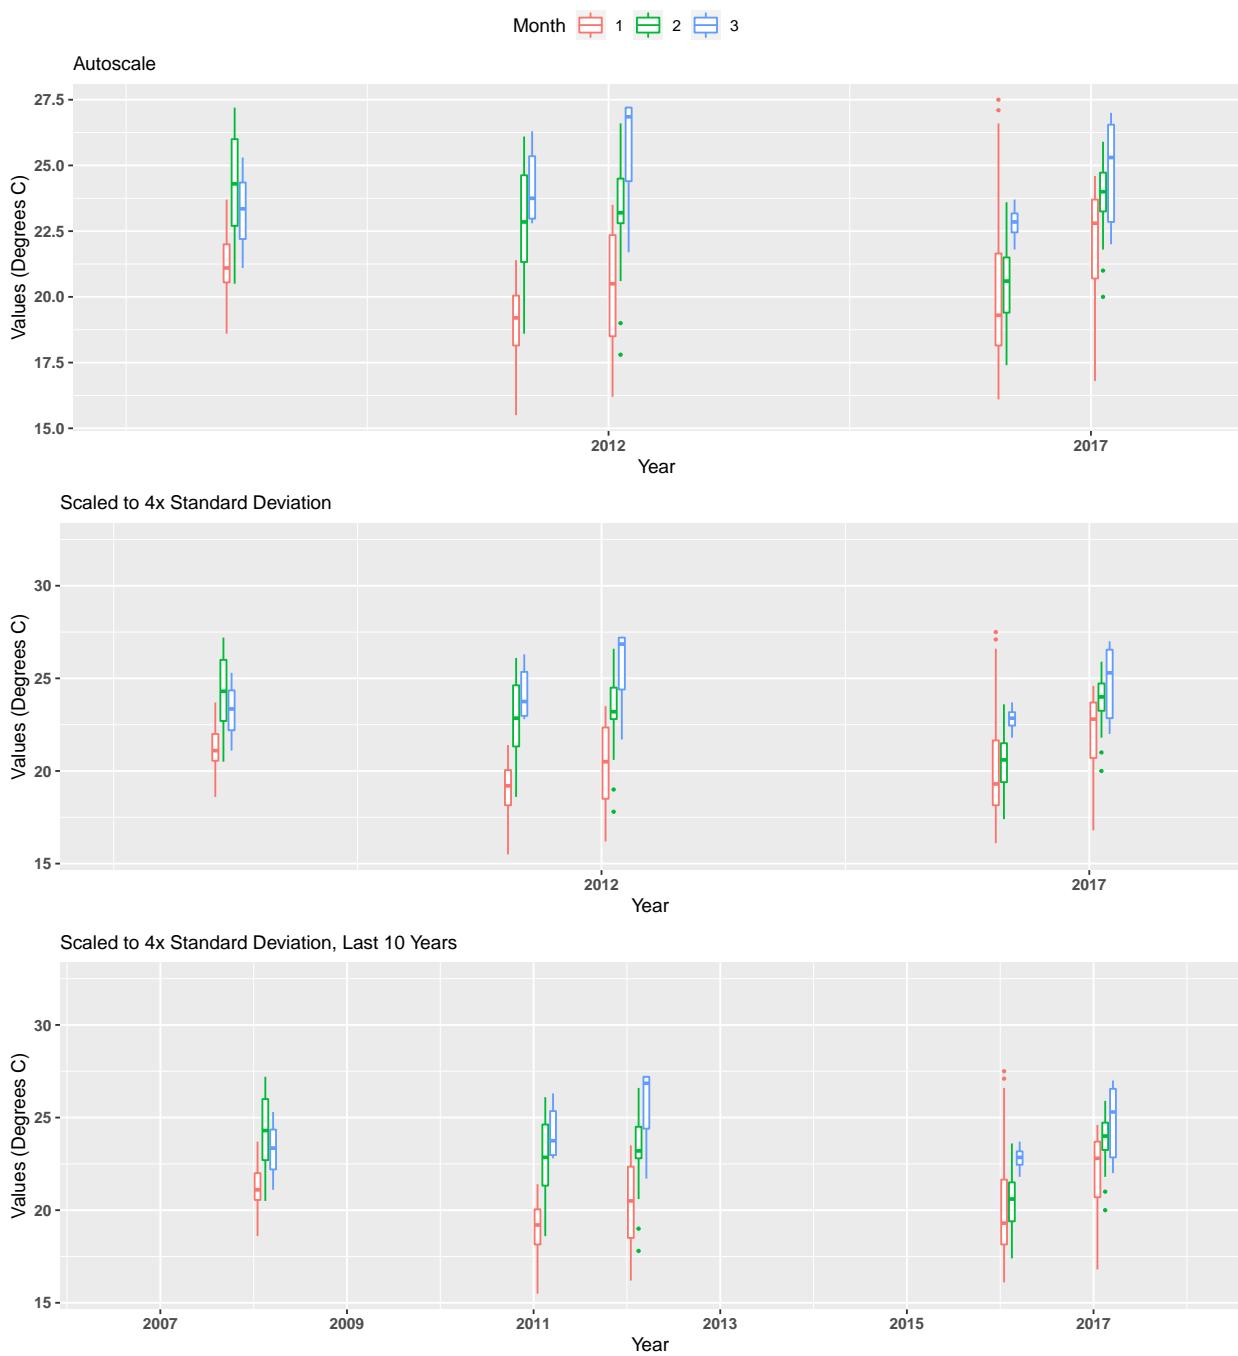

Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve


7 | National Water Information System | 255123081321300

By Month

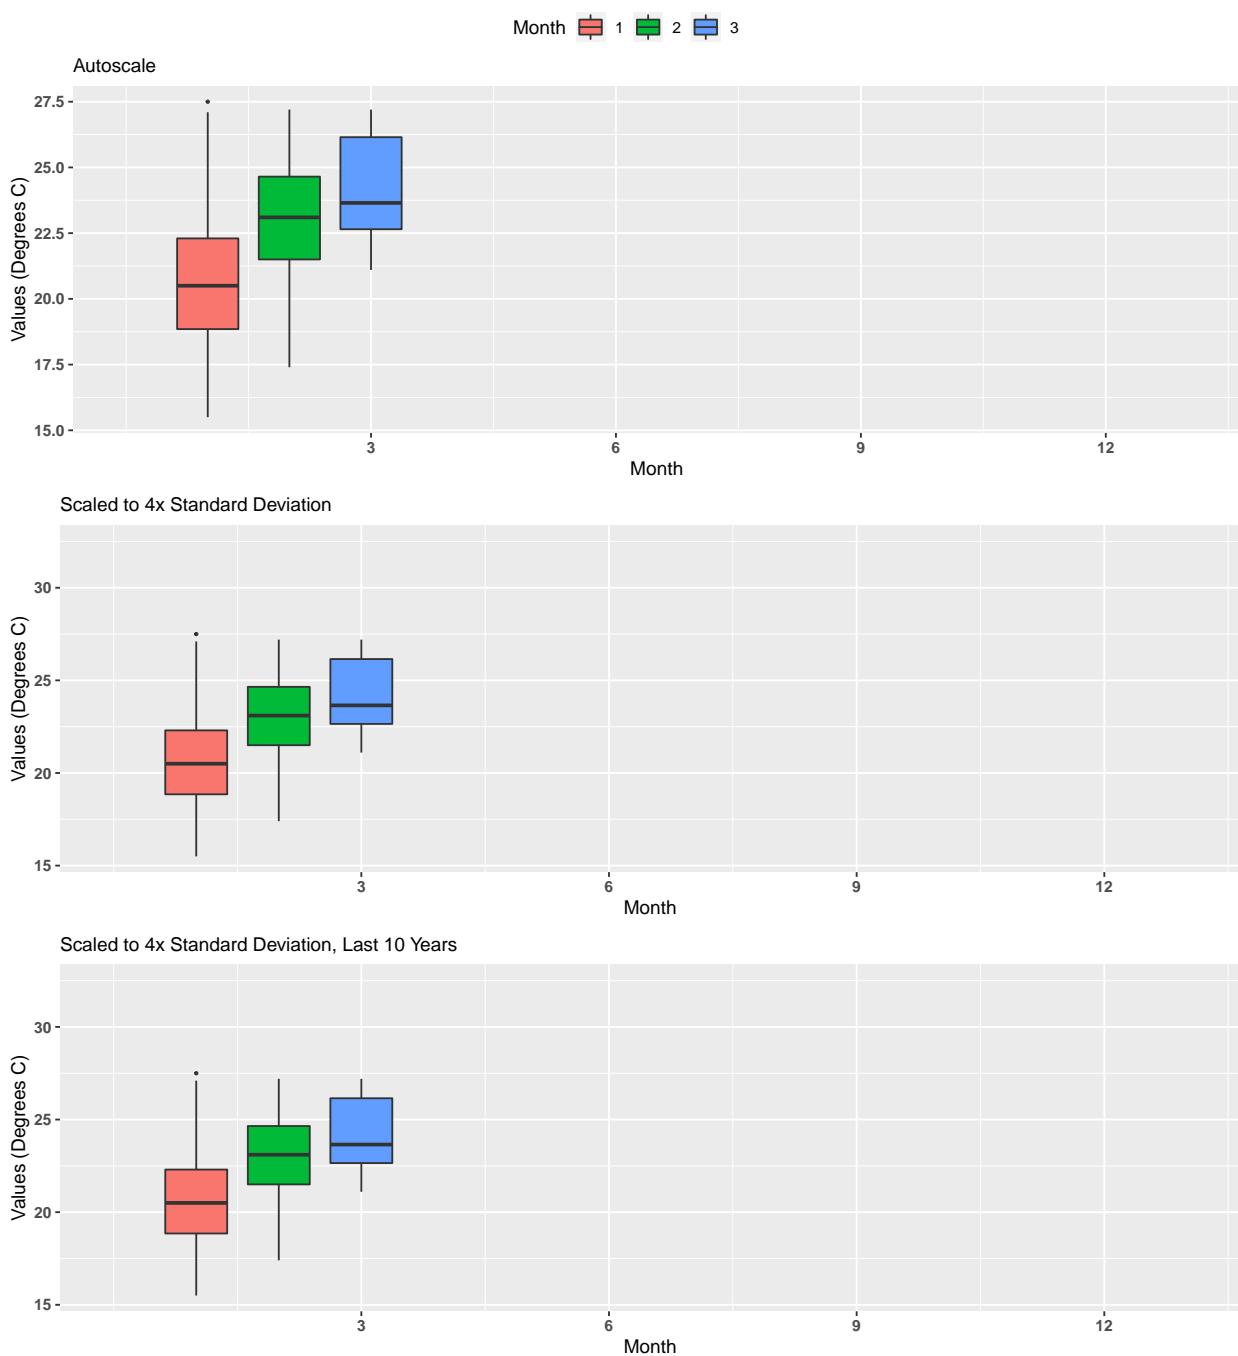

Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255432081303900


By Year

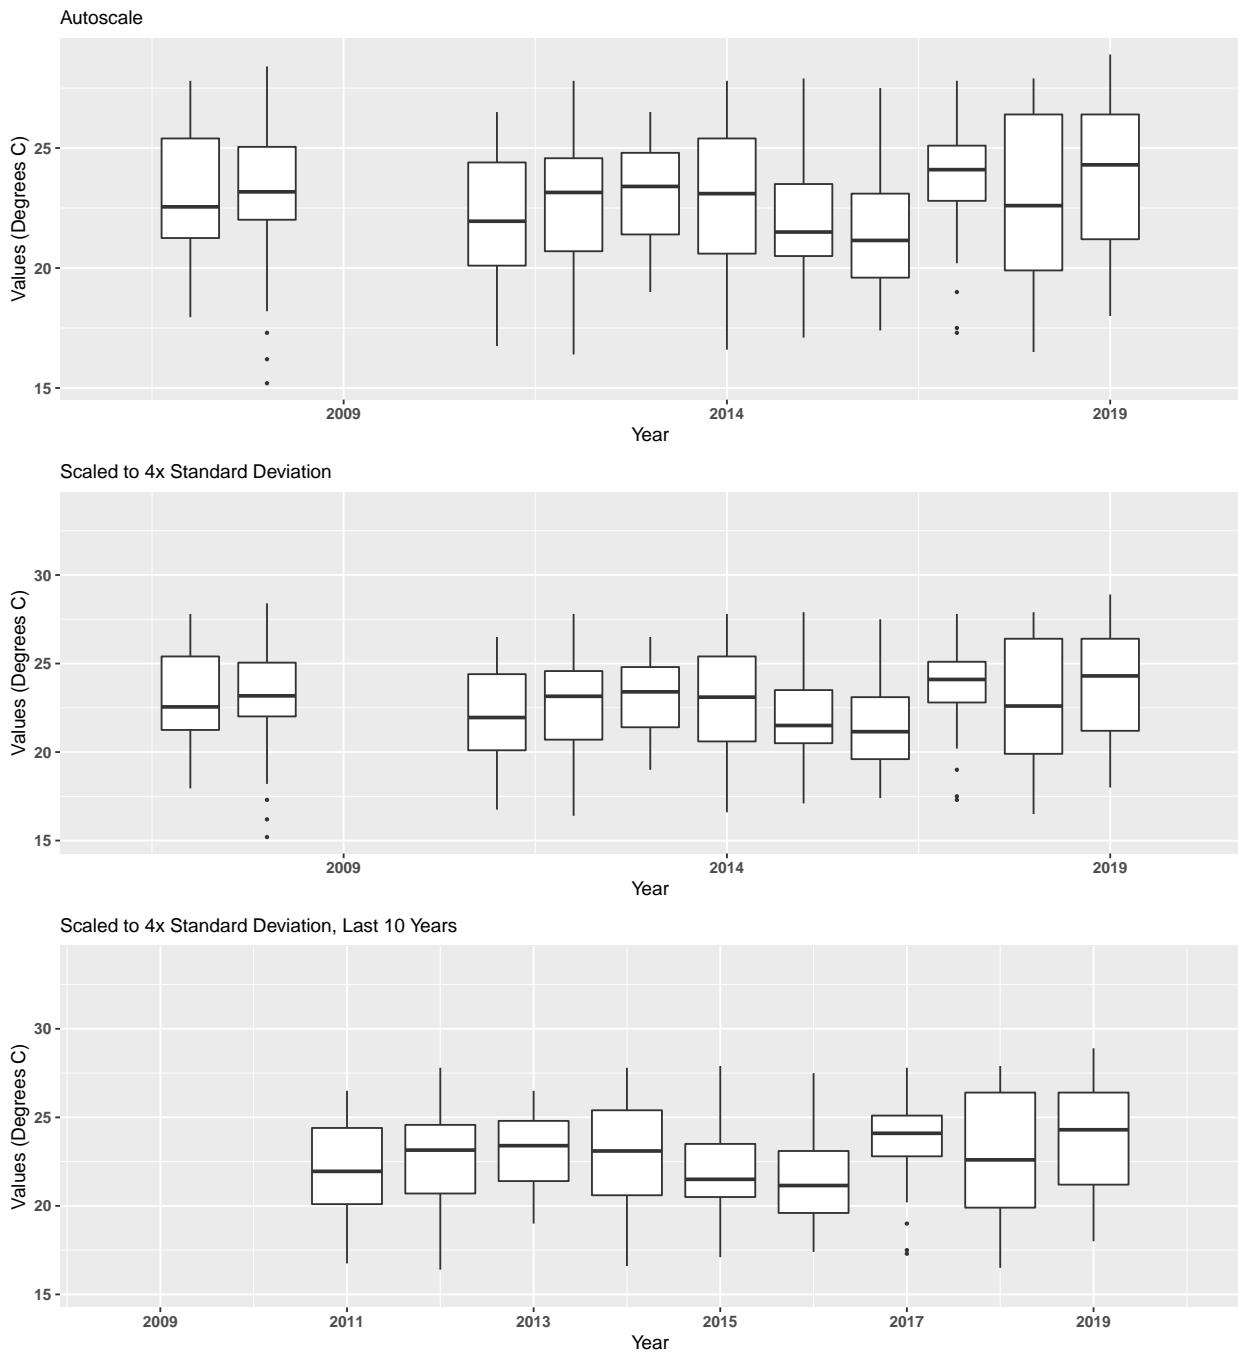


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve

7 | National Water Information System | 255432081303900

By Year & Month

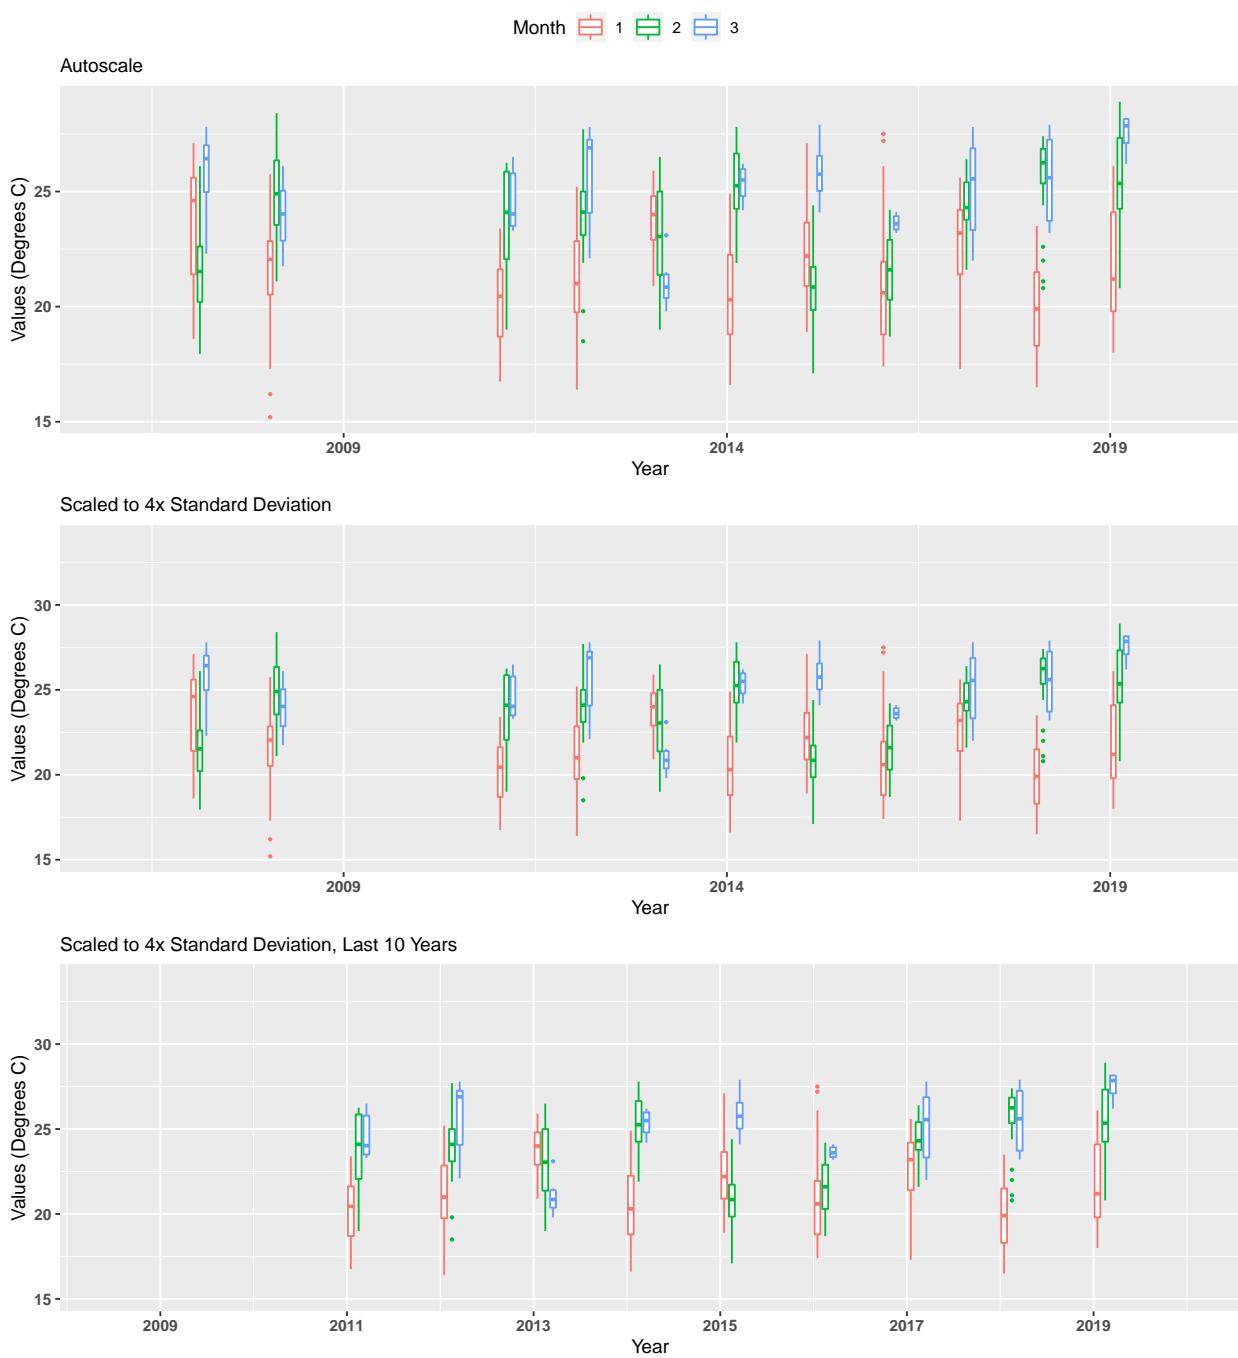


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255432081303900
By Month

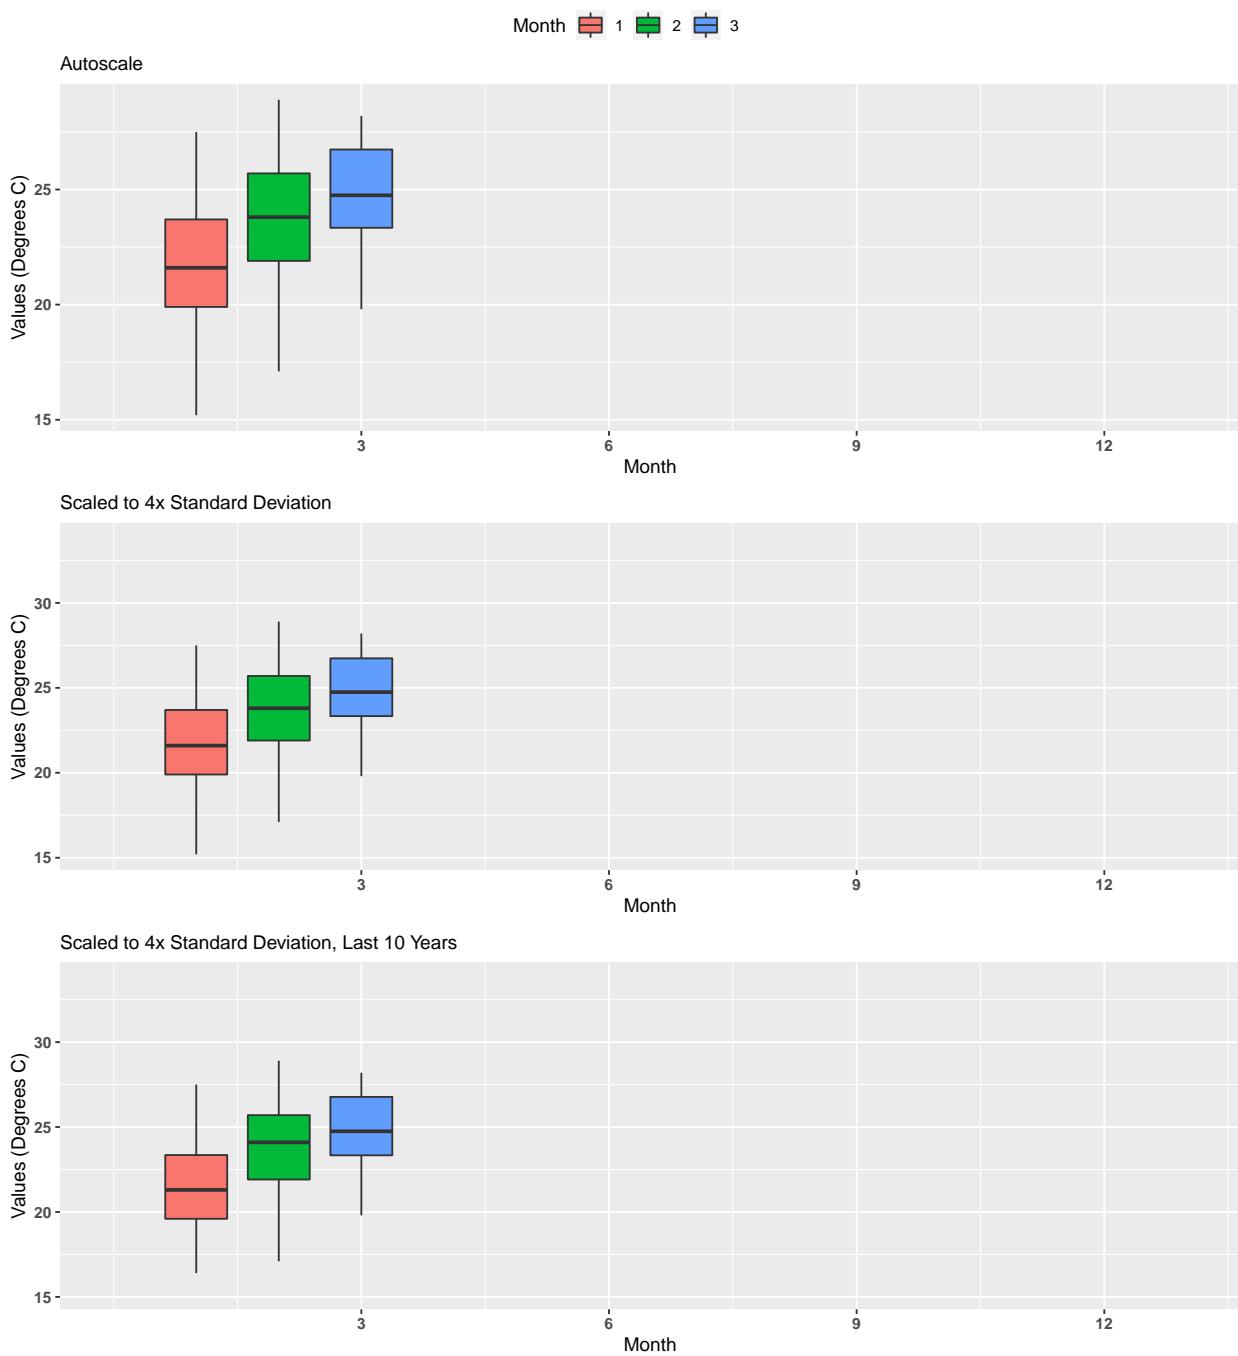


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255534081324000

By Year

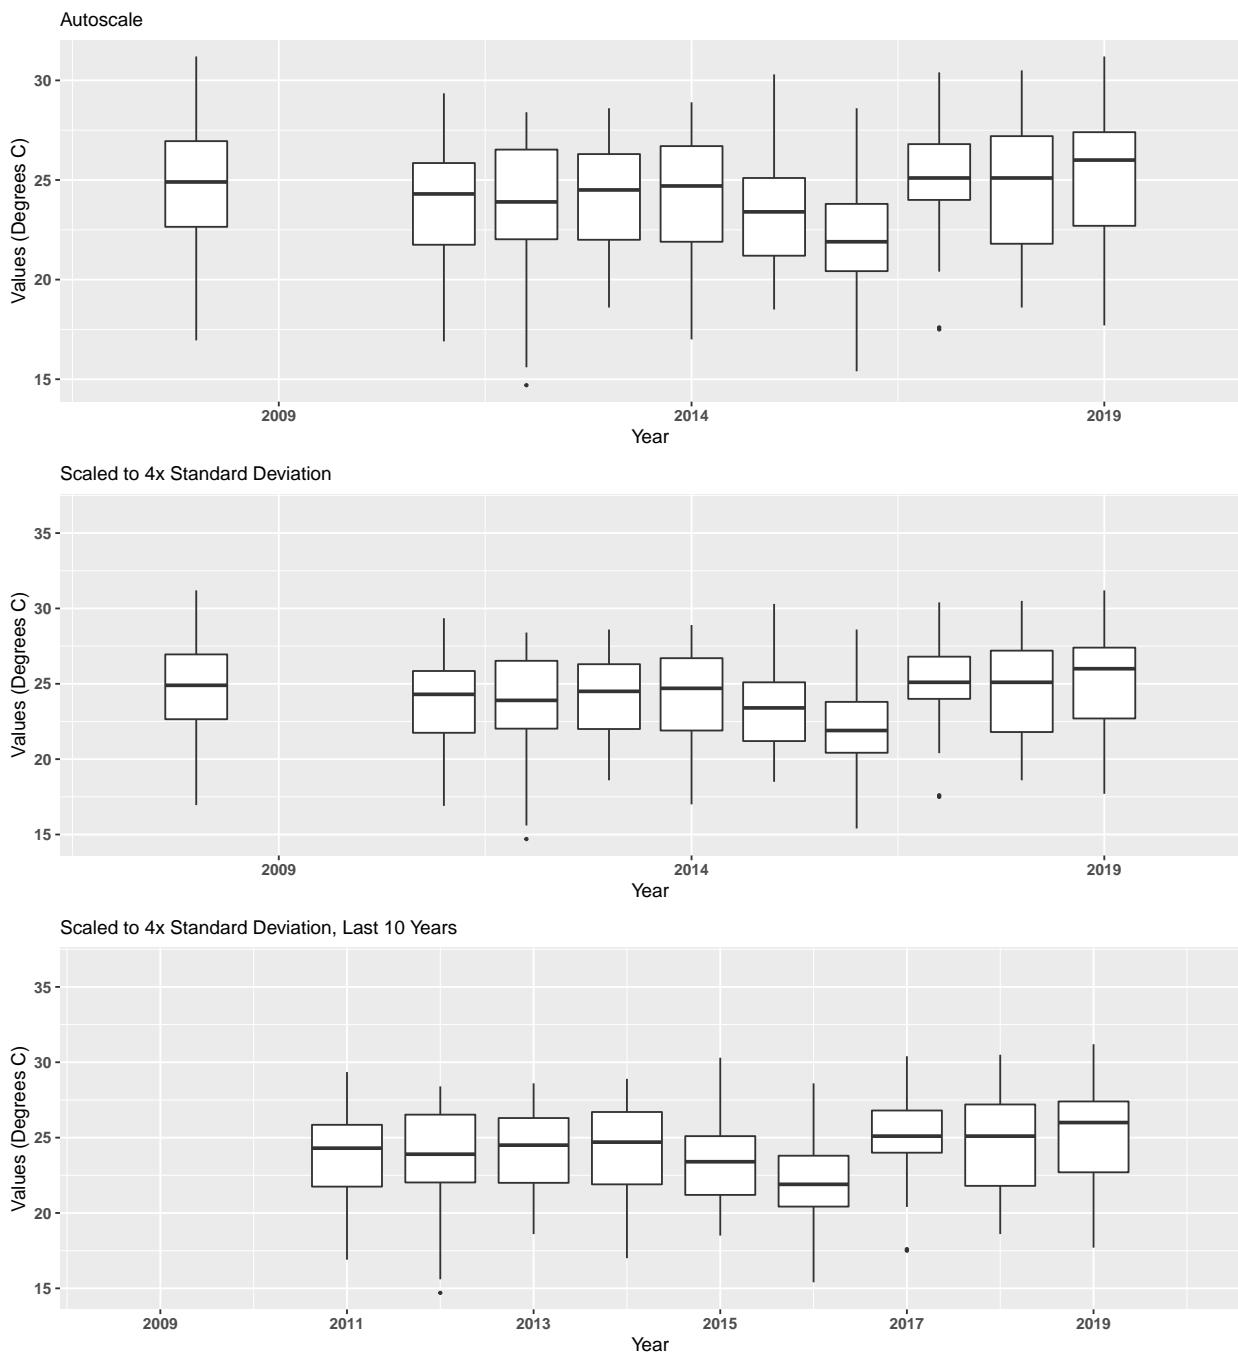


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255534081324000
 By Year & Month

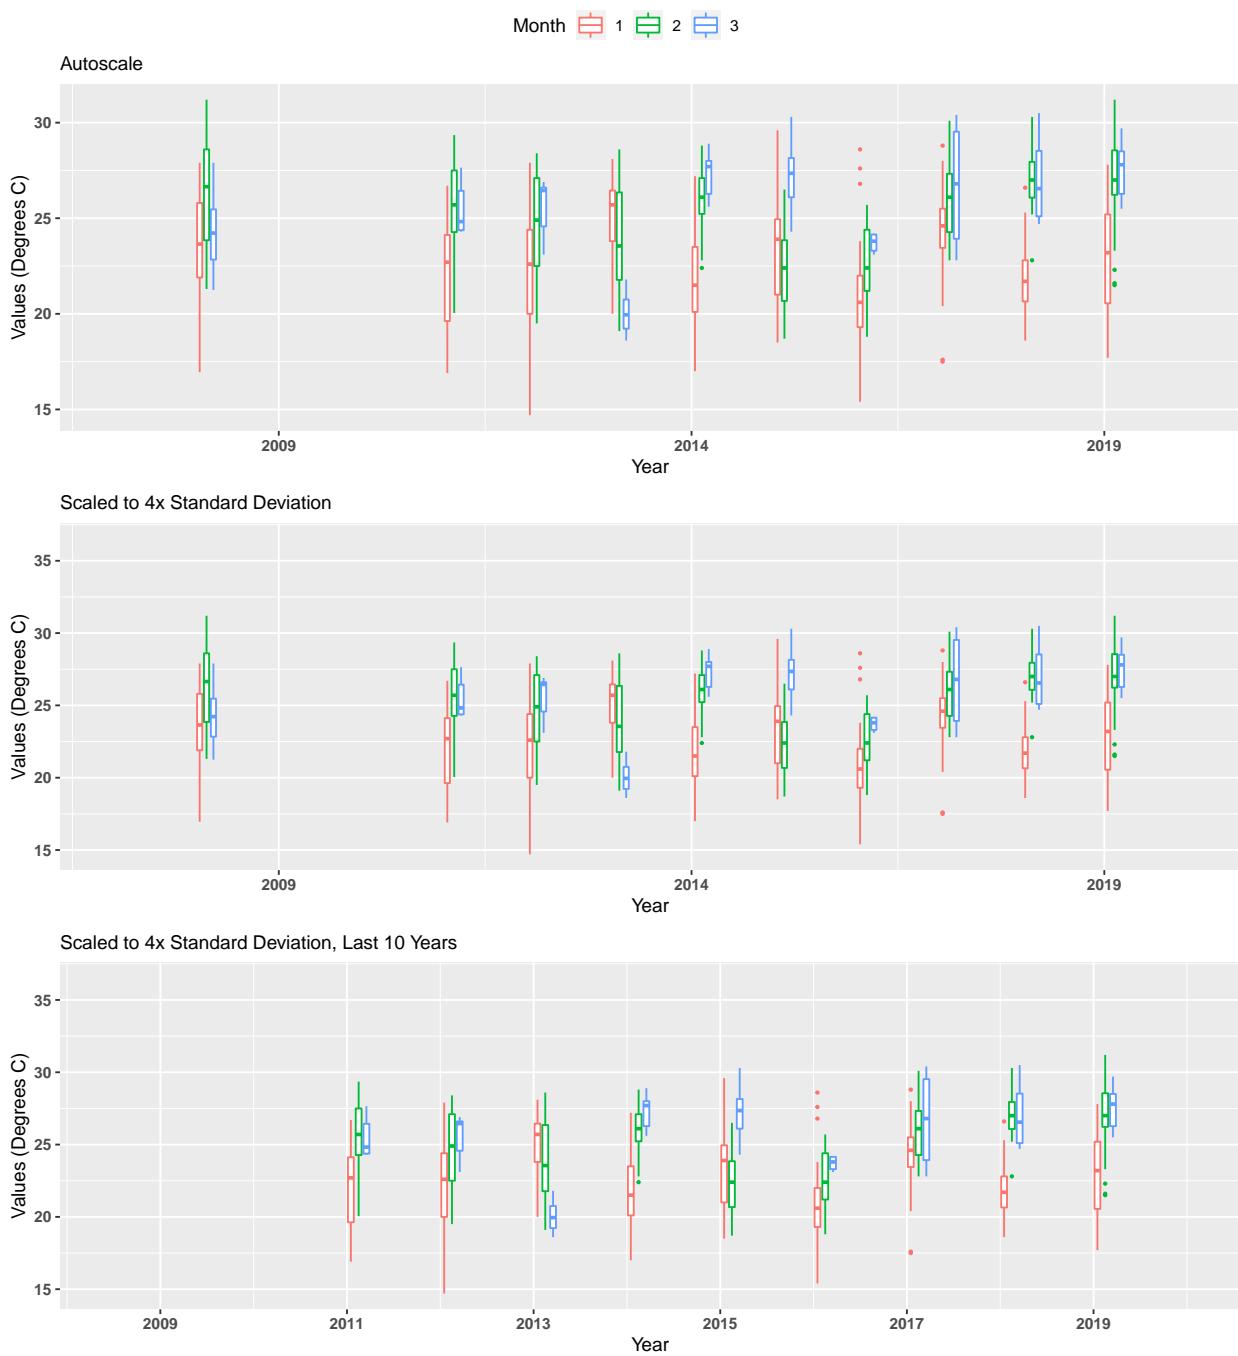


**Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255534081324000**

By Month

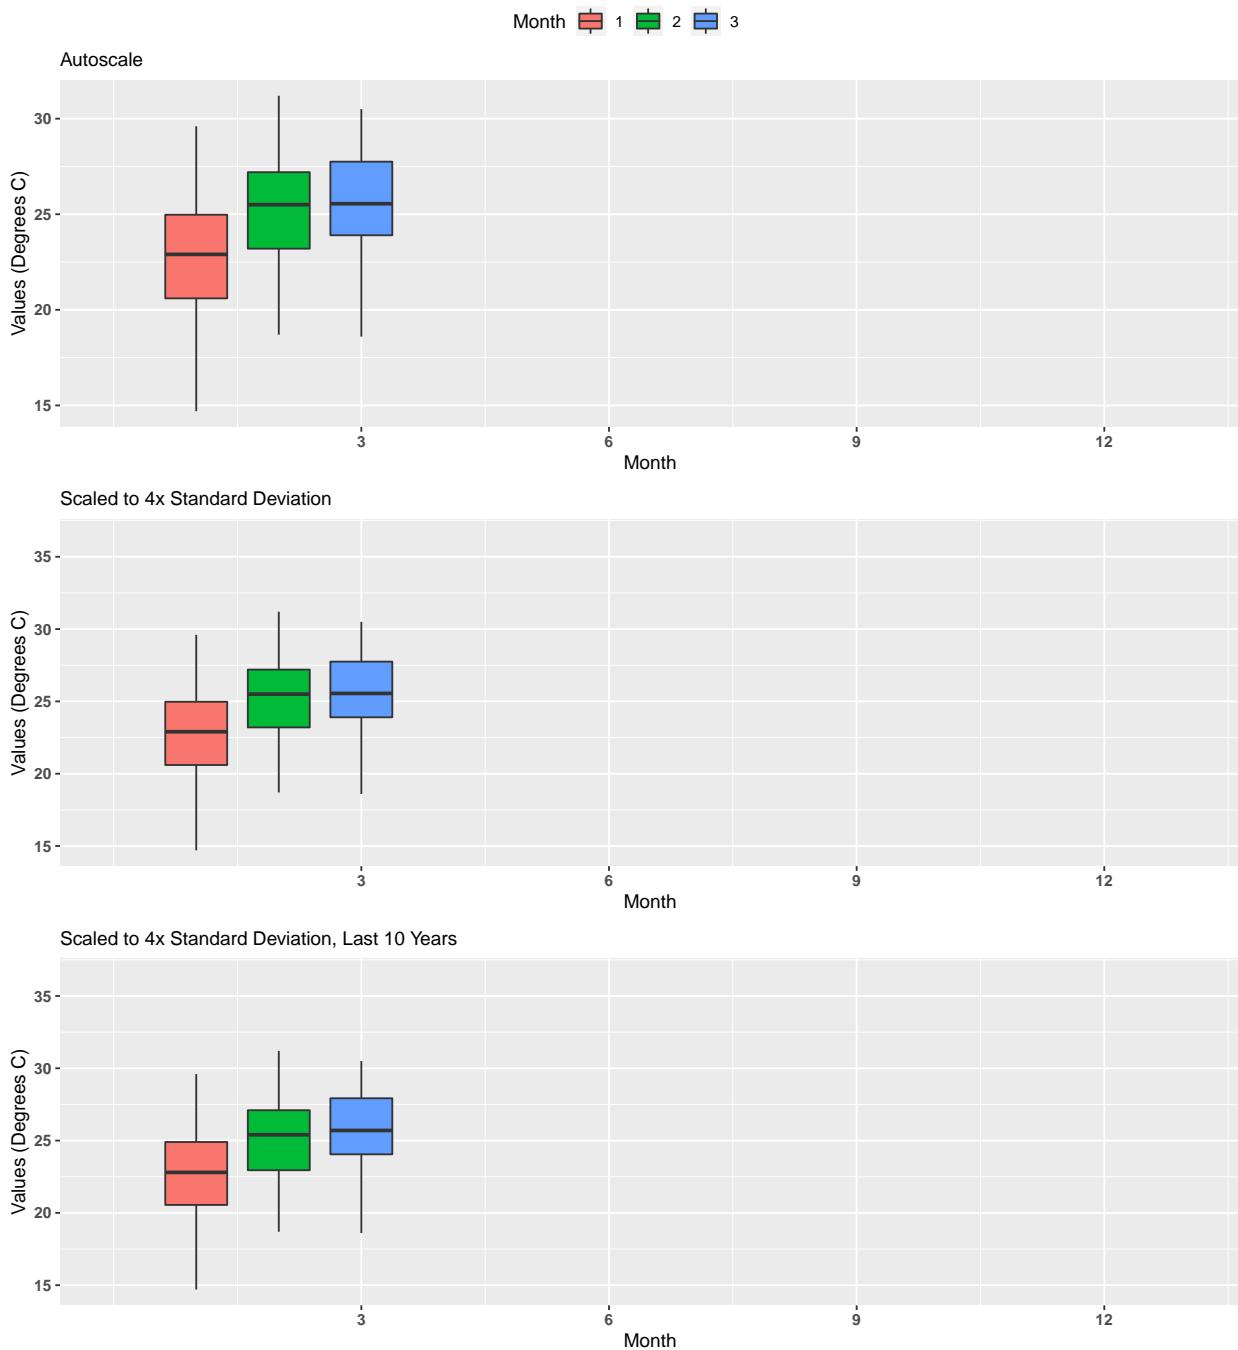


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255654081350200

By Year

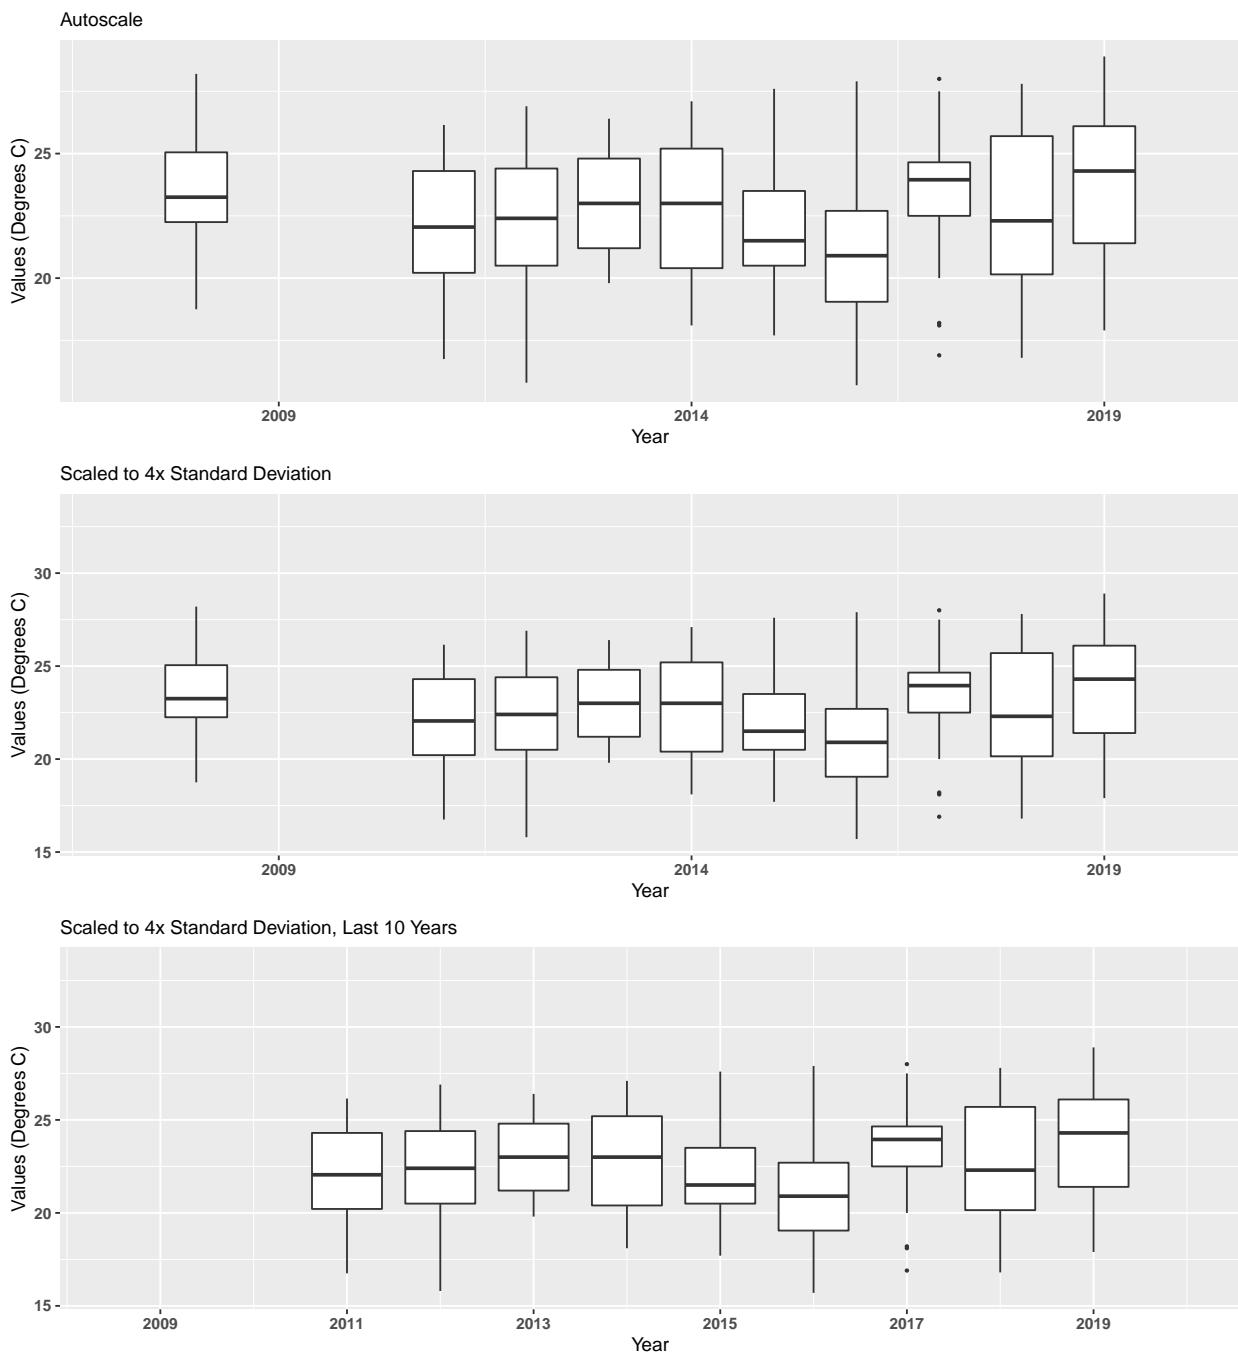


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255654081350200
By Year & Month

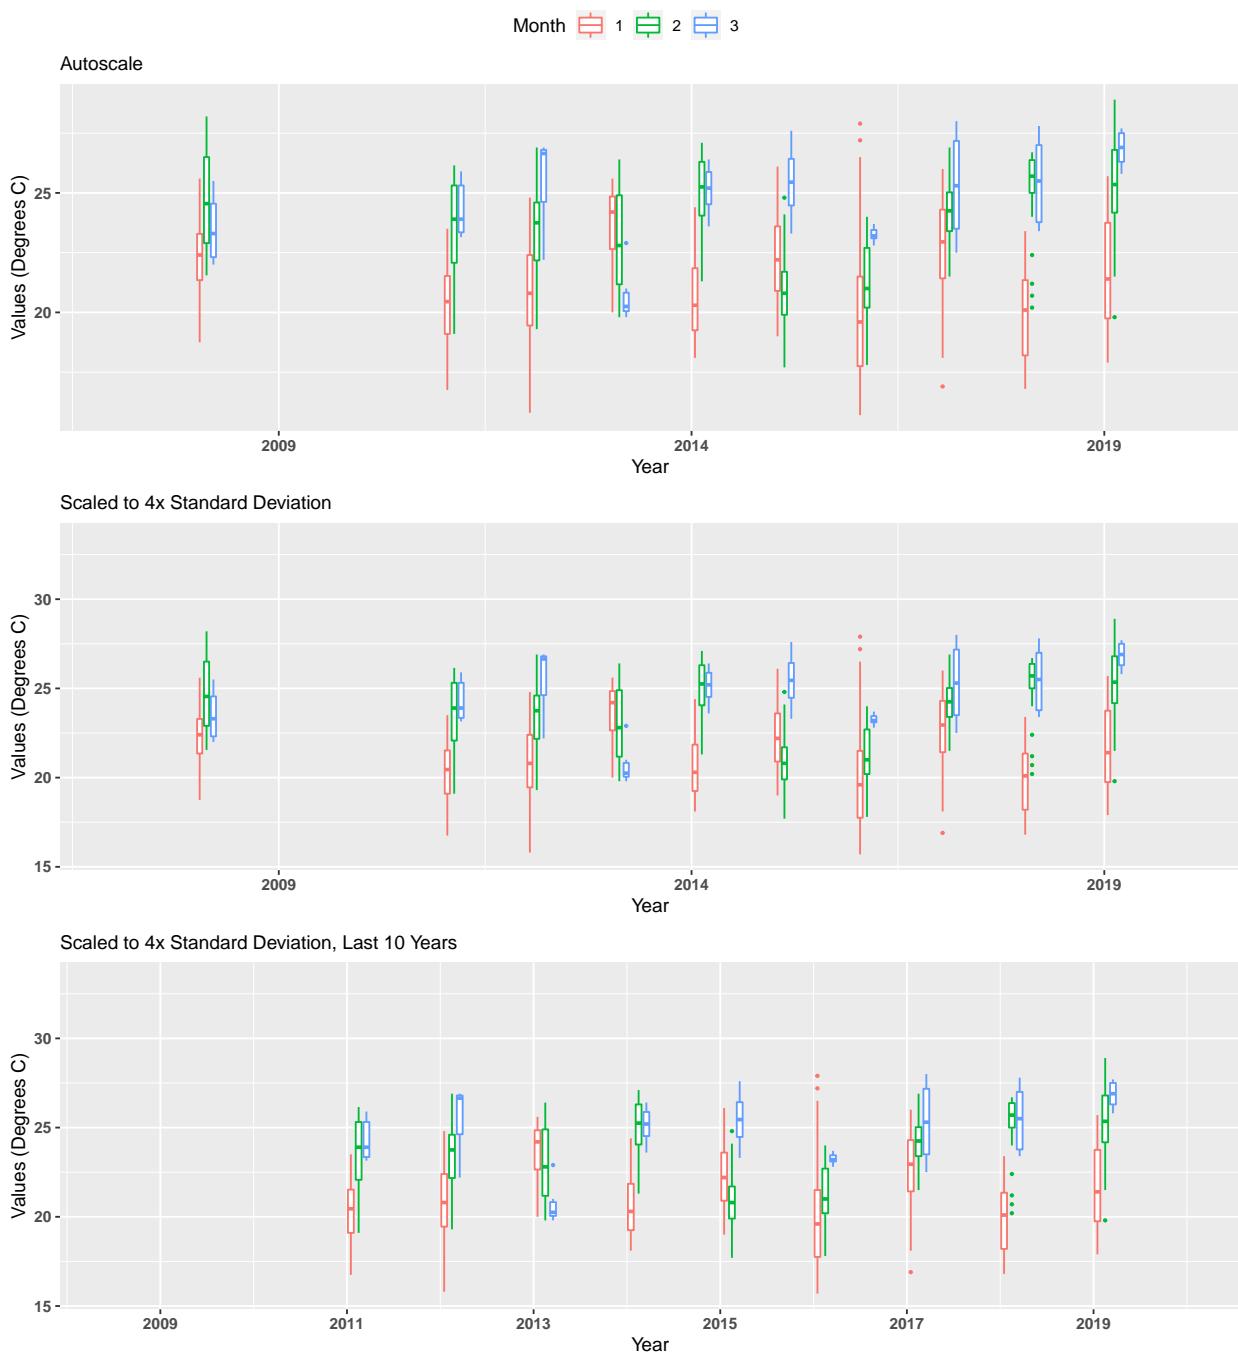


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
7 | National Water Information System | 255654081350200


By Month

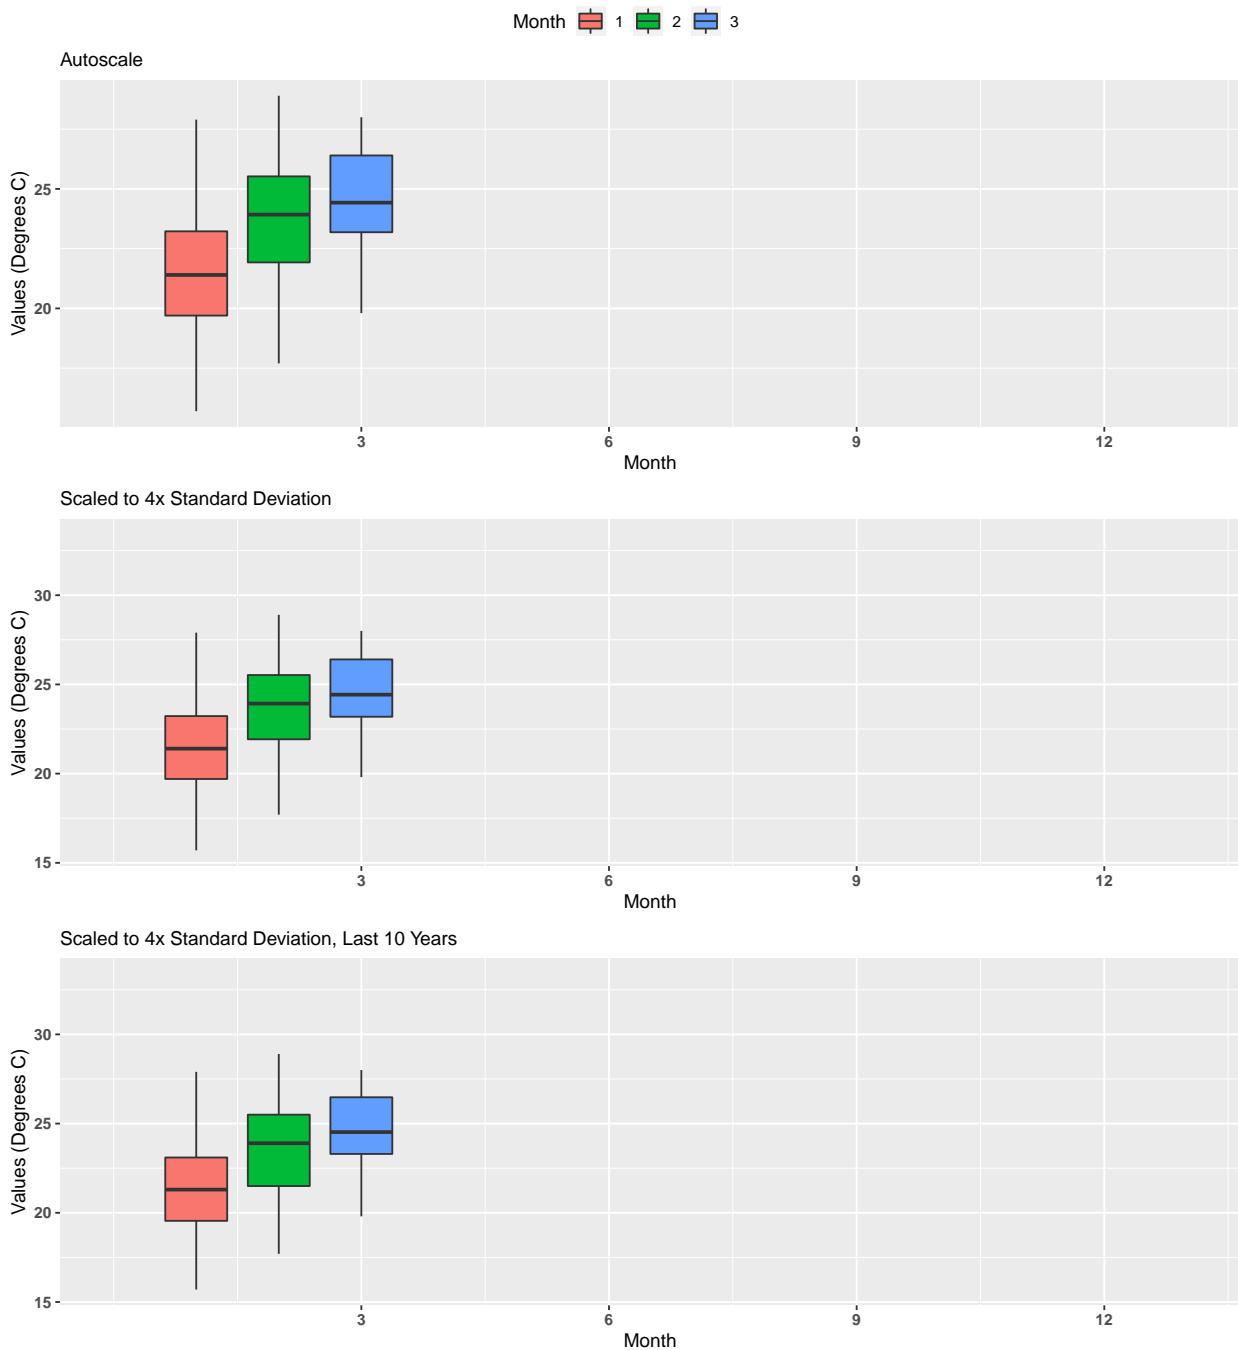


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfbwq
By Year

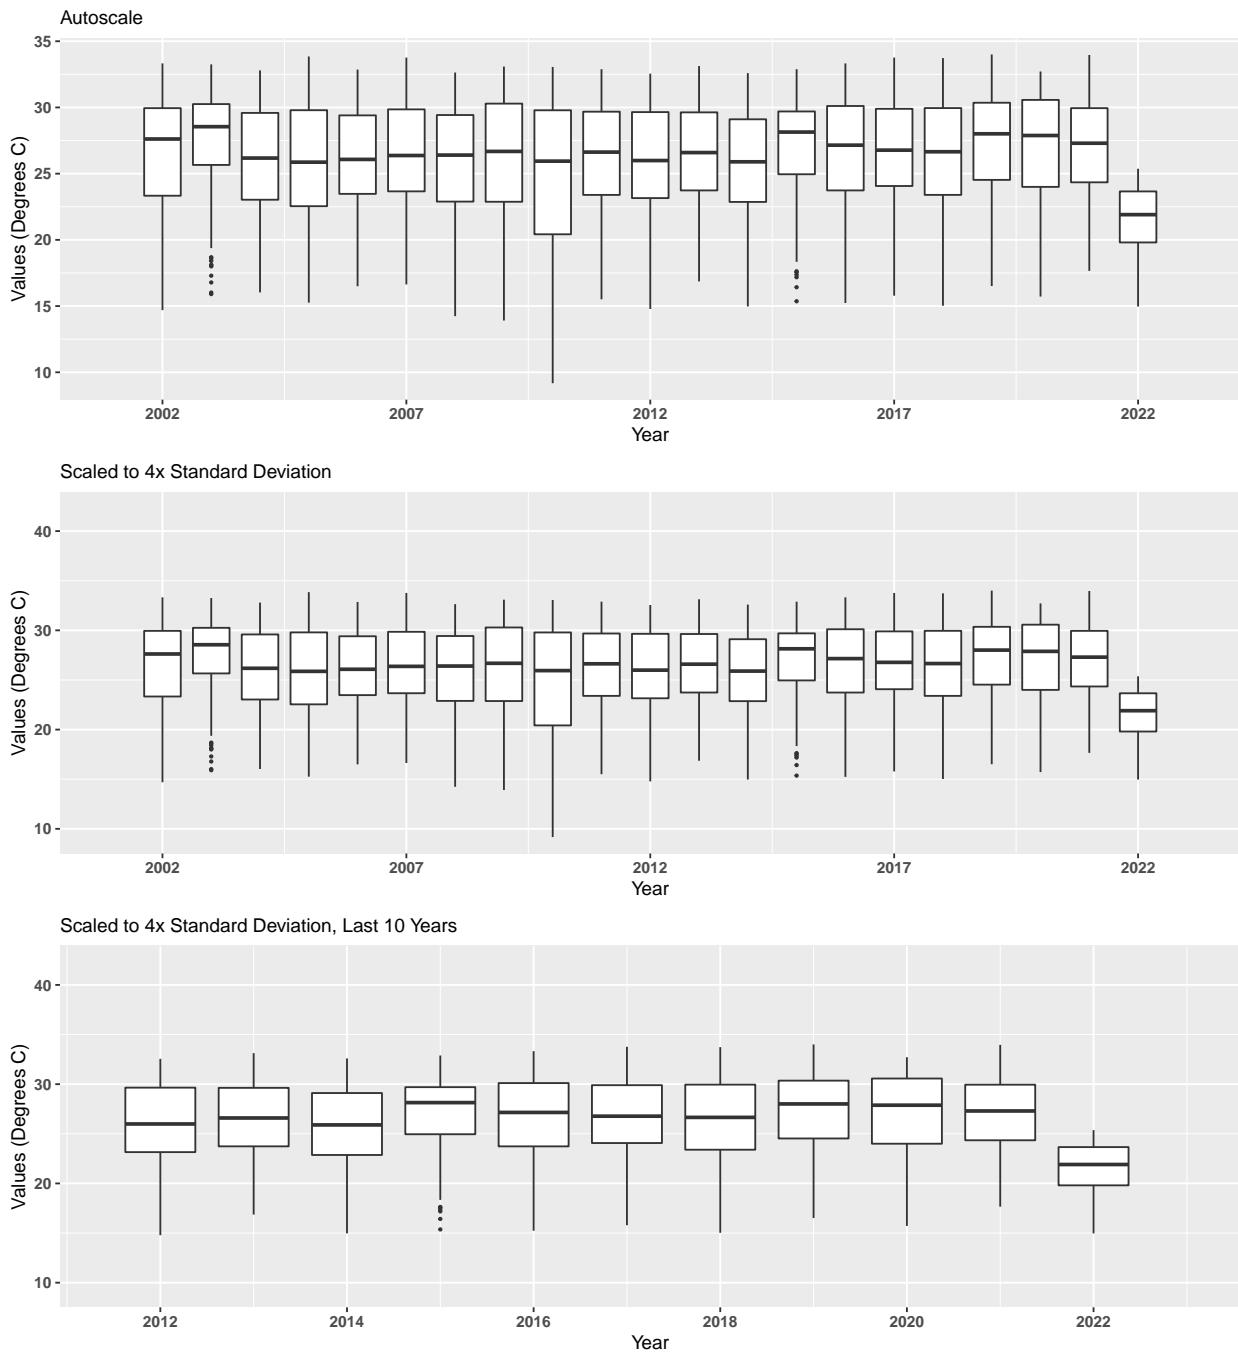


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbfbwq
 By Year & Month

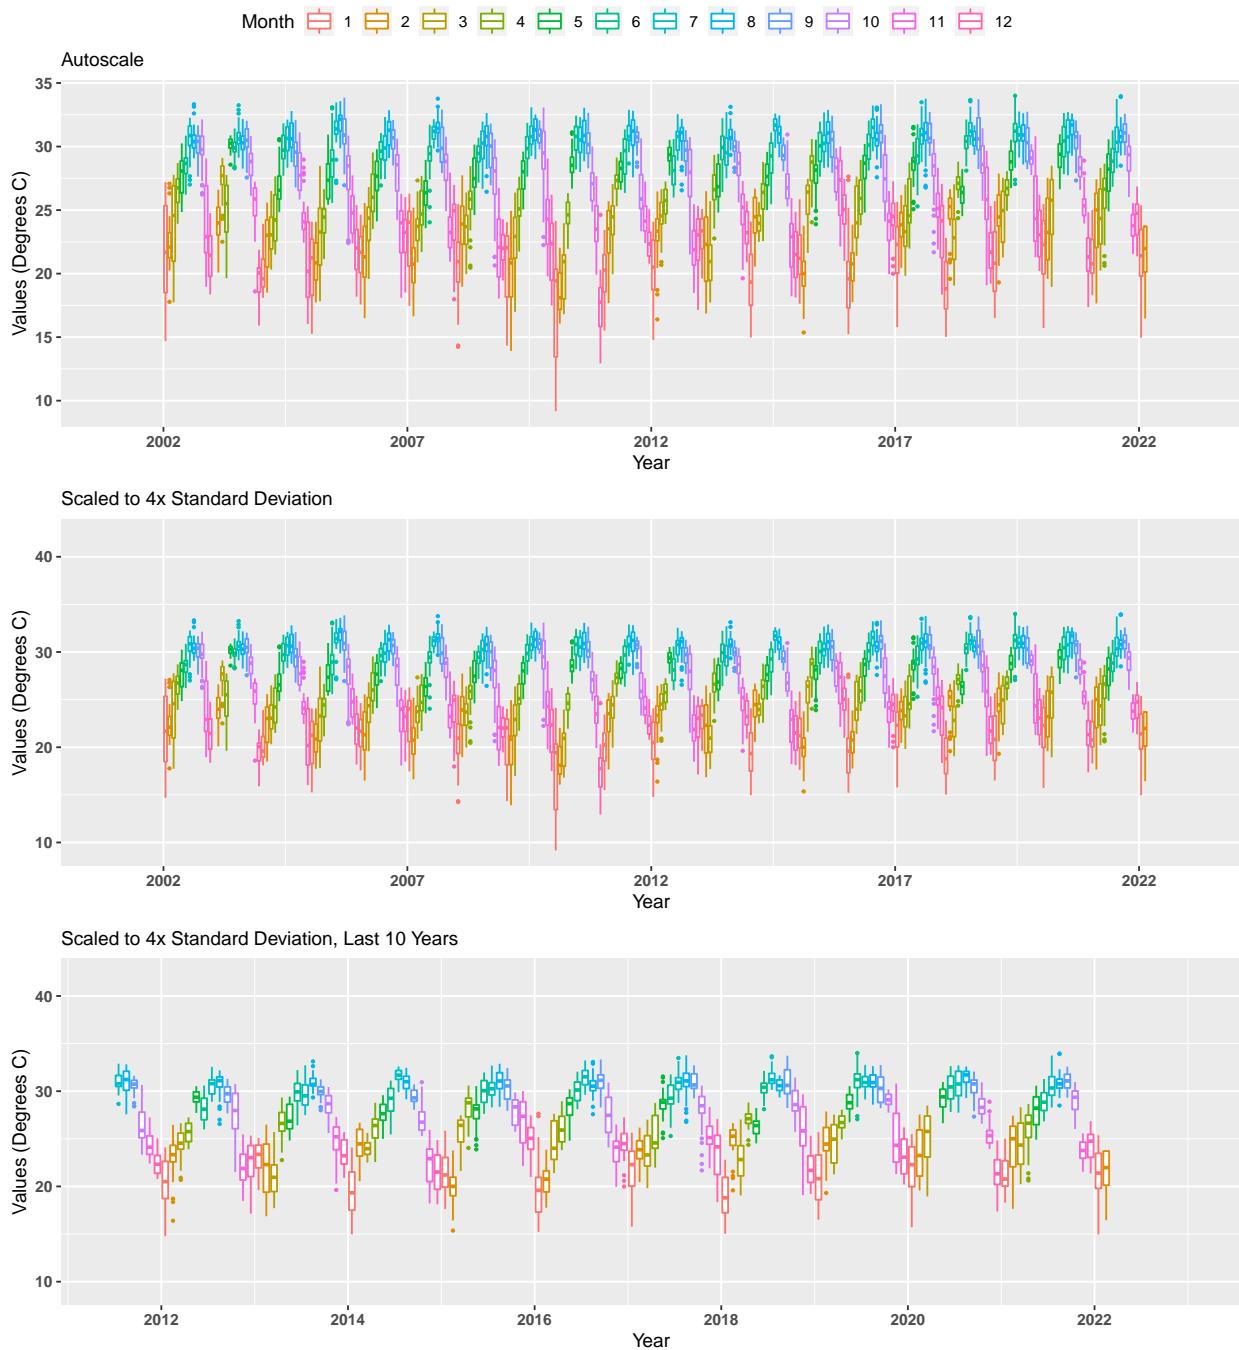


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbfbwq
 By Month

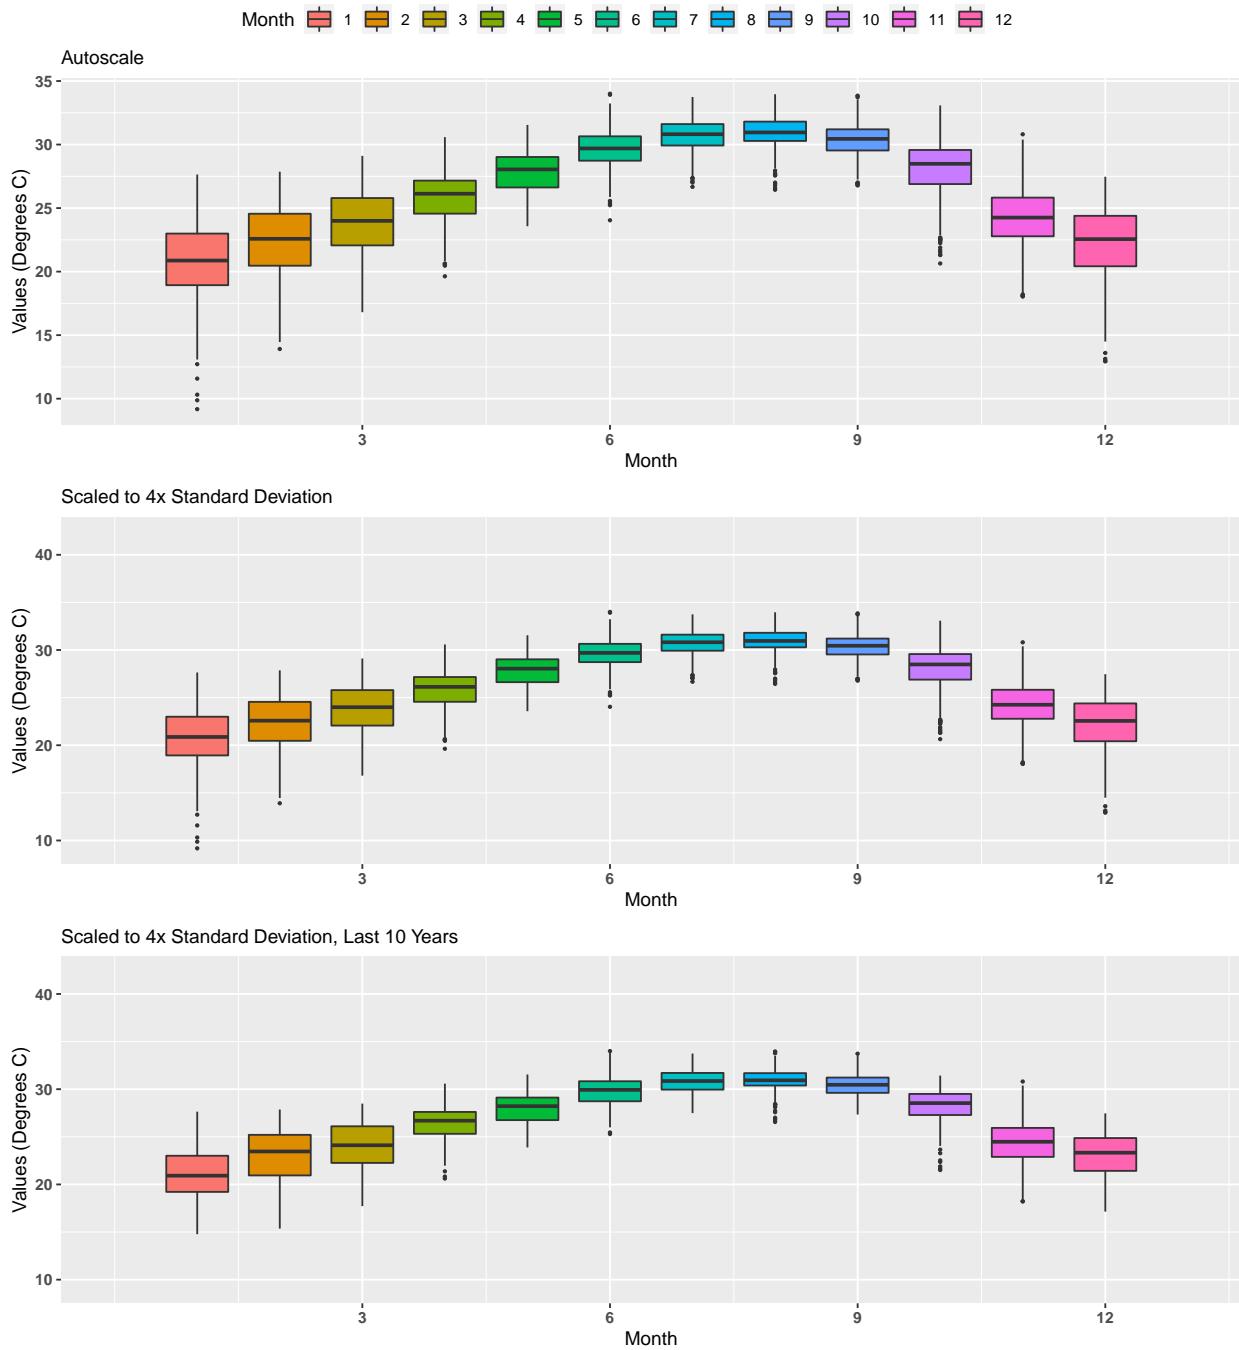


**Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbfuwq**
By Year

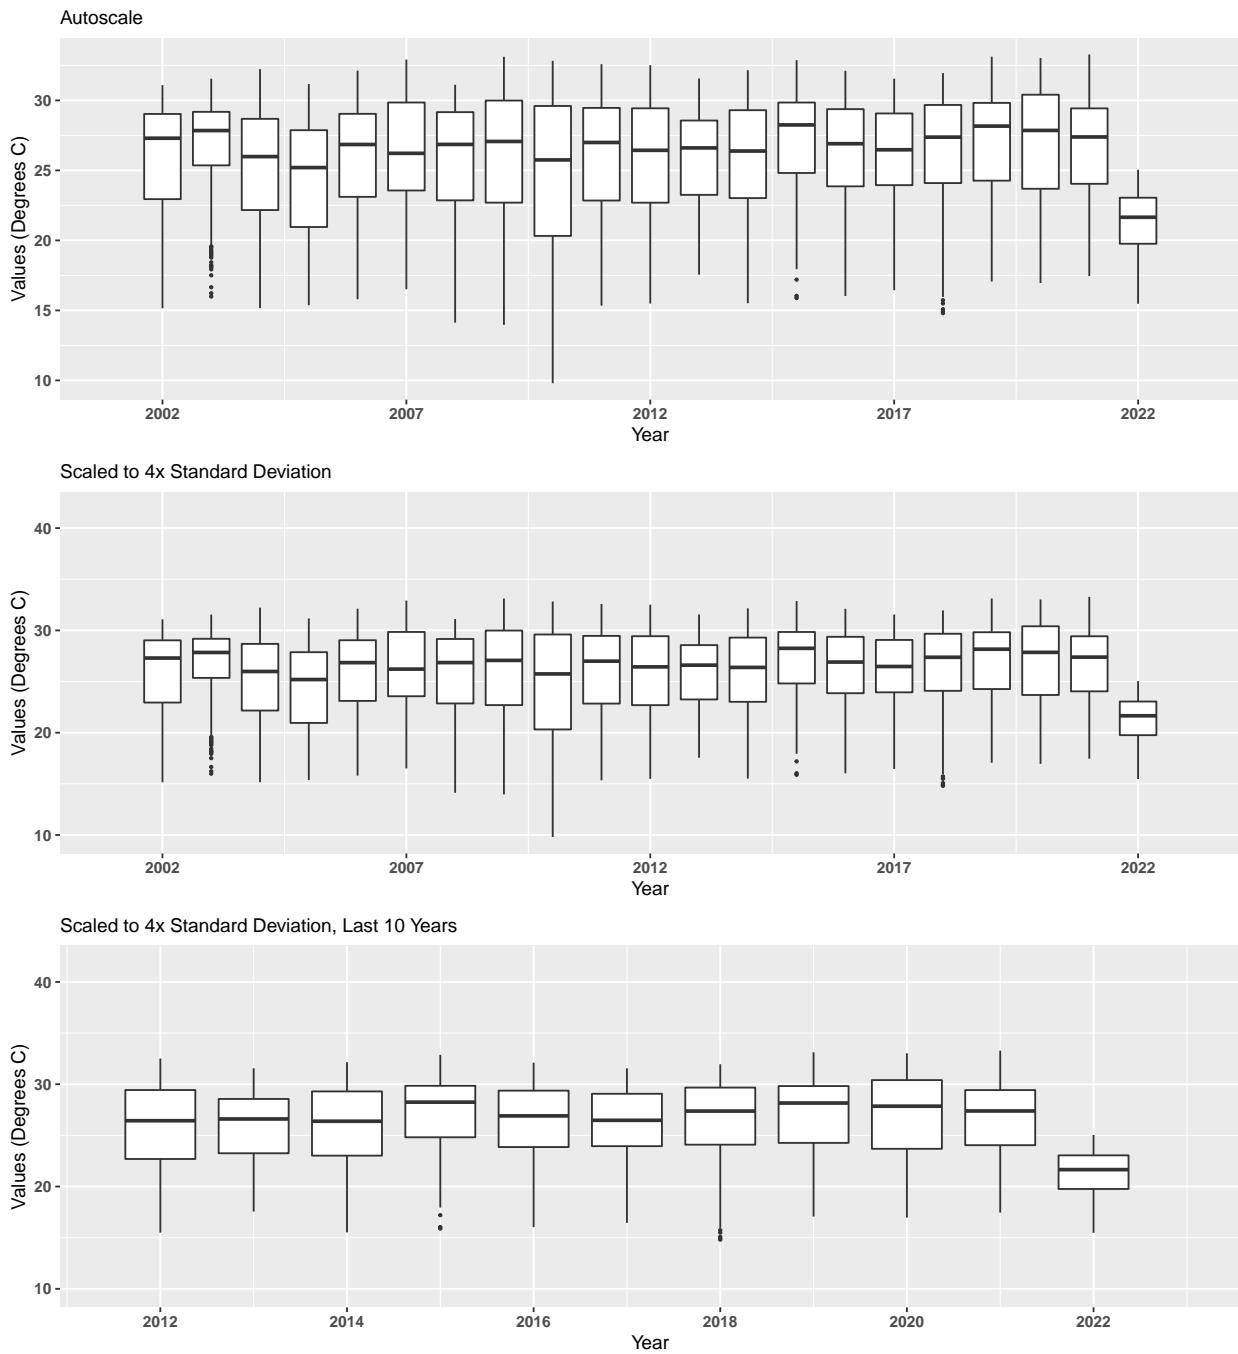


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbfuwq
 By Year & Month

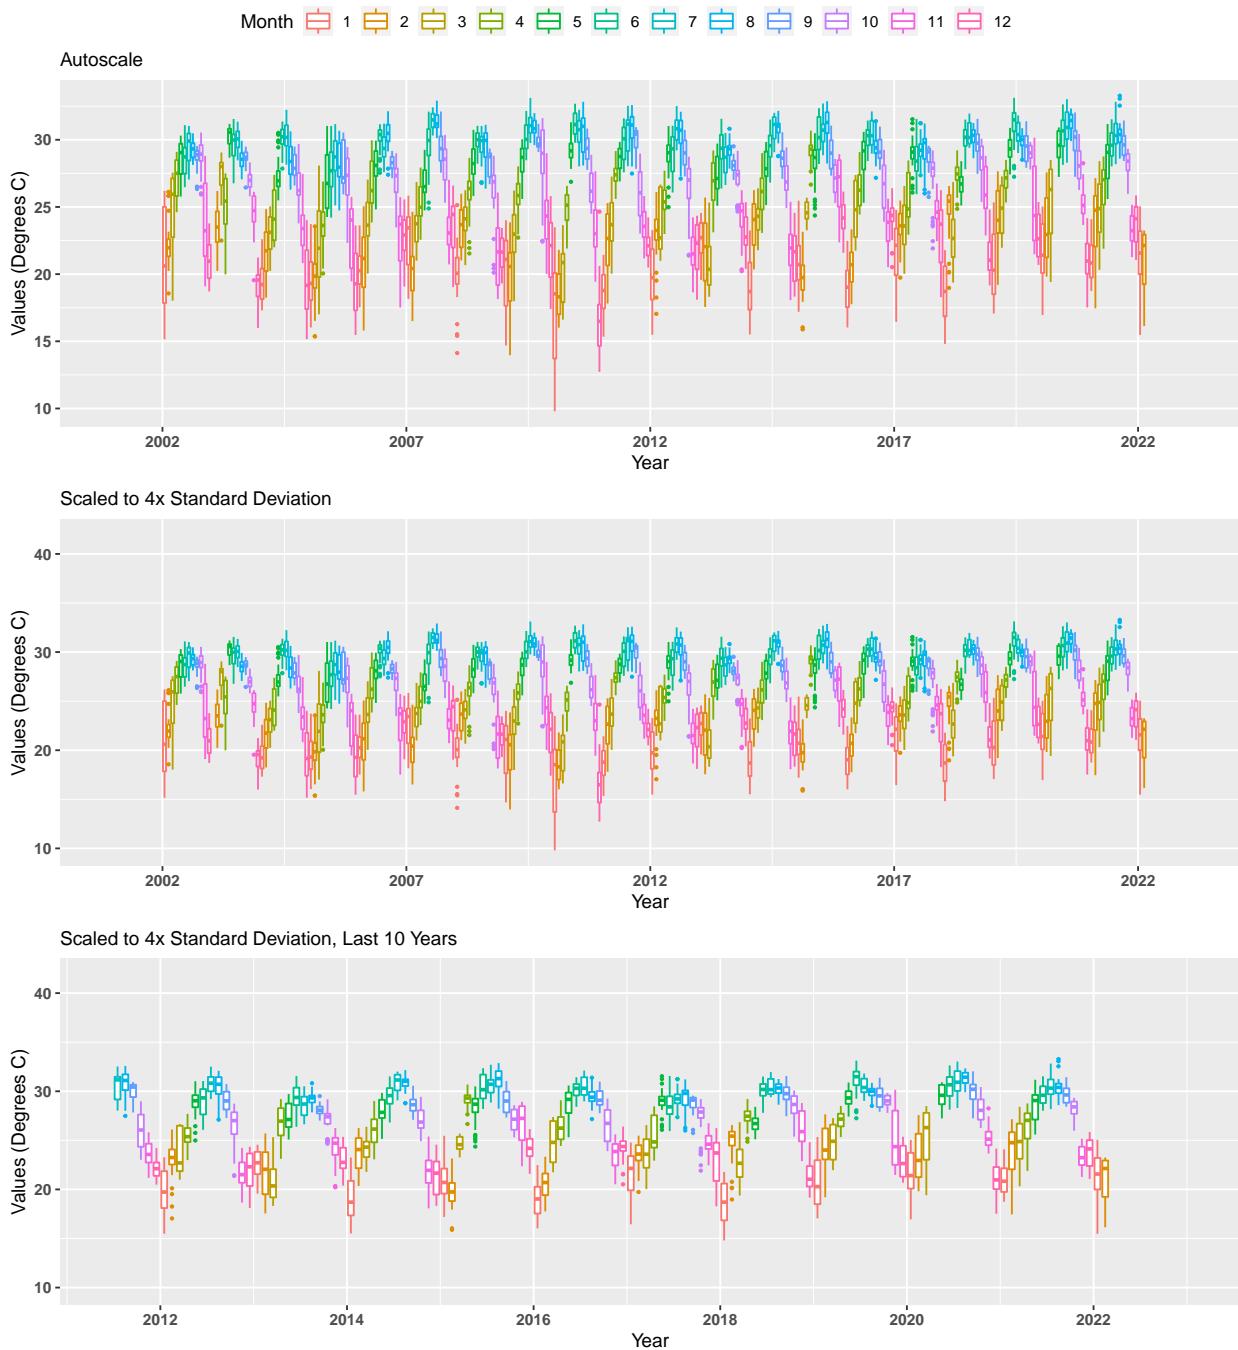


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbfwuq
 By Month

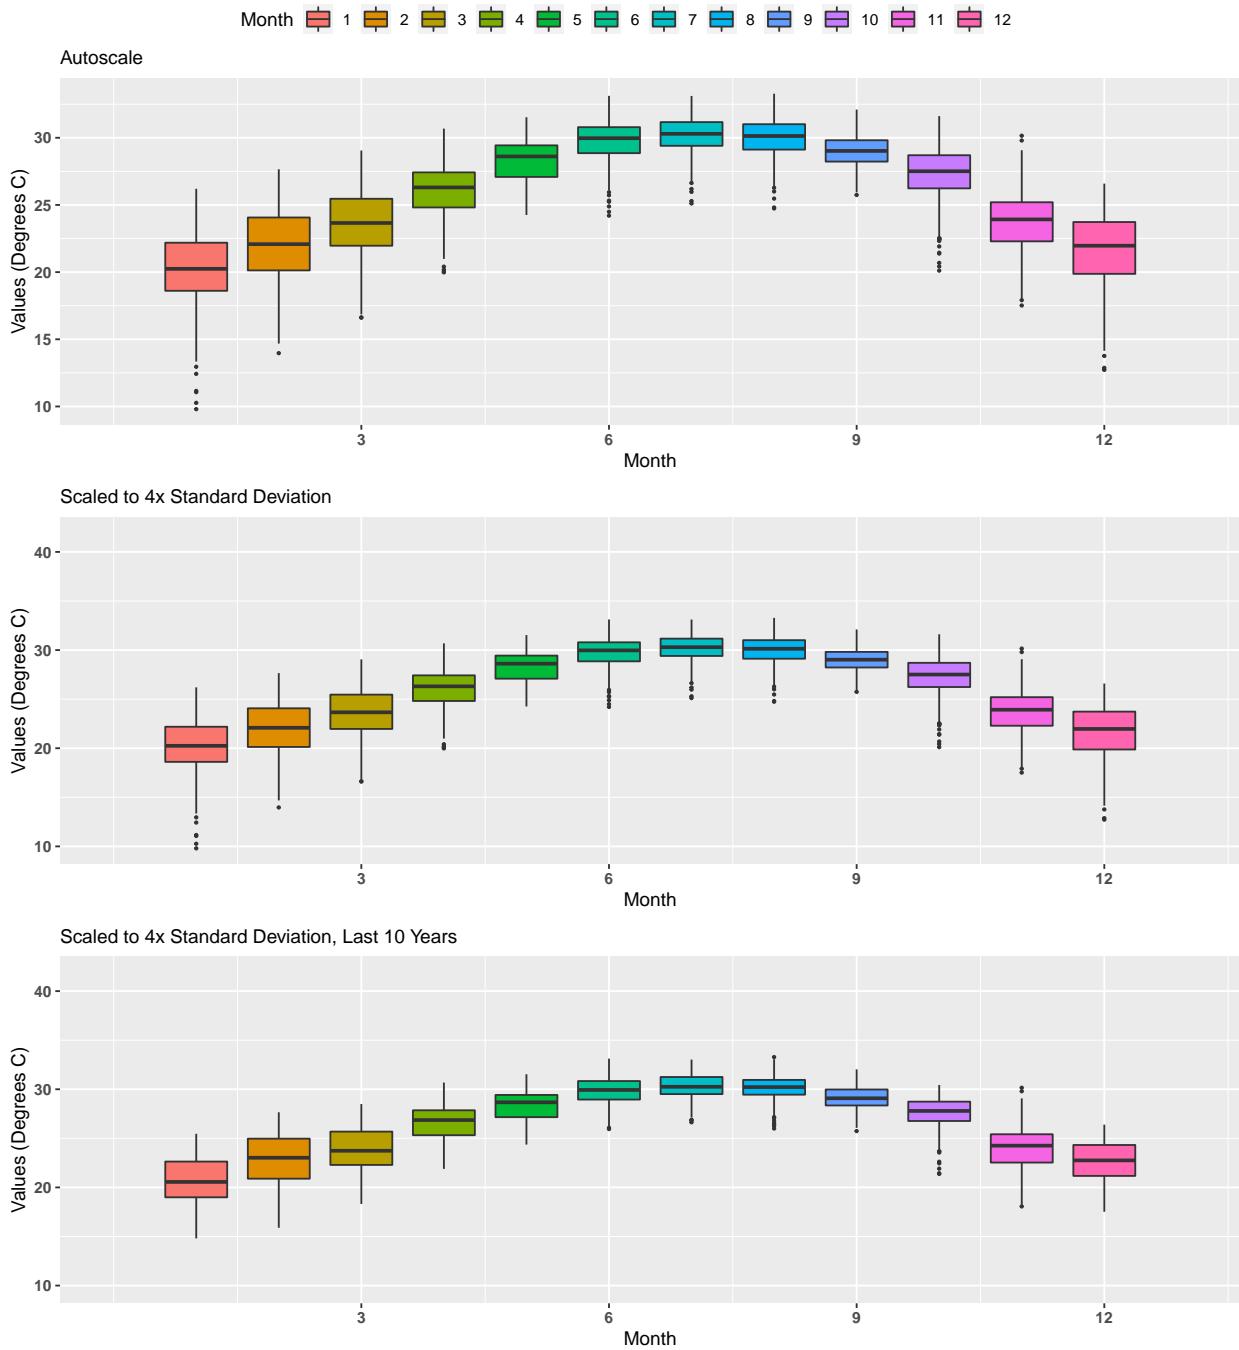


**Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbmbwq**
By Year

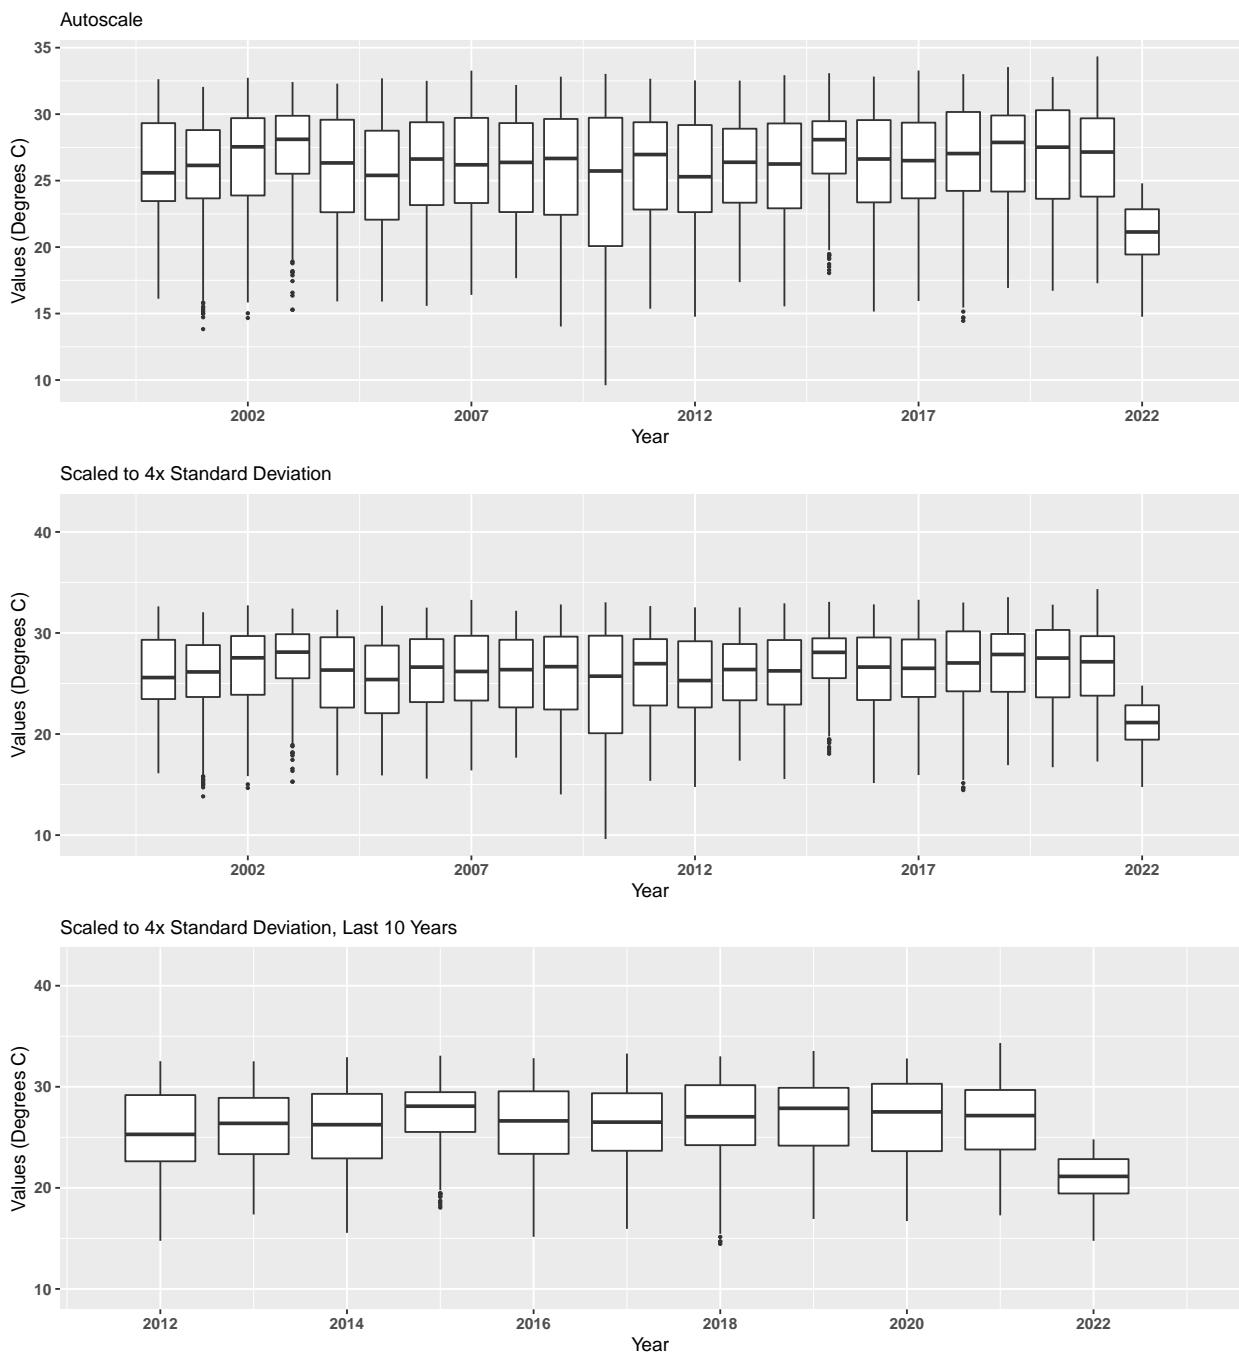


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbmbwq
 By Year & Month

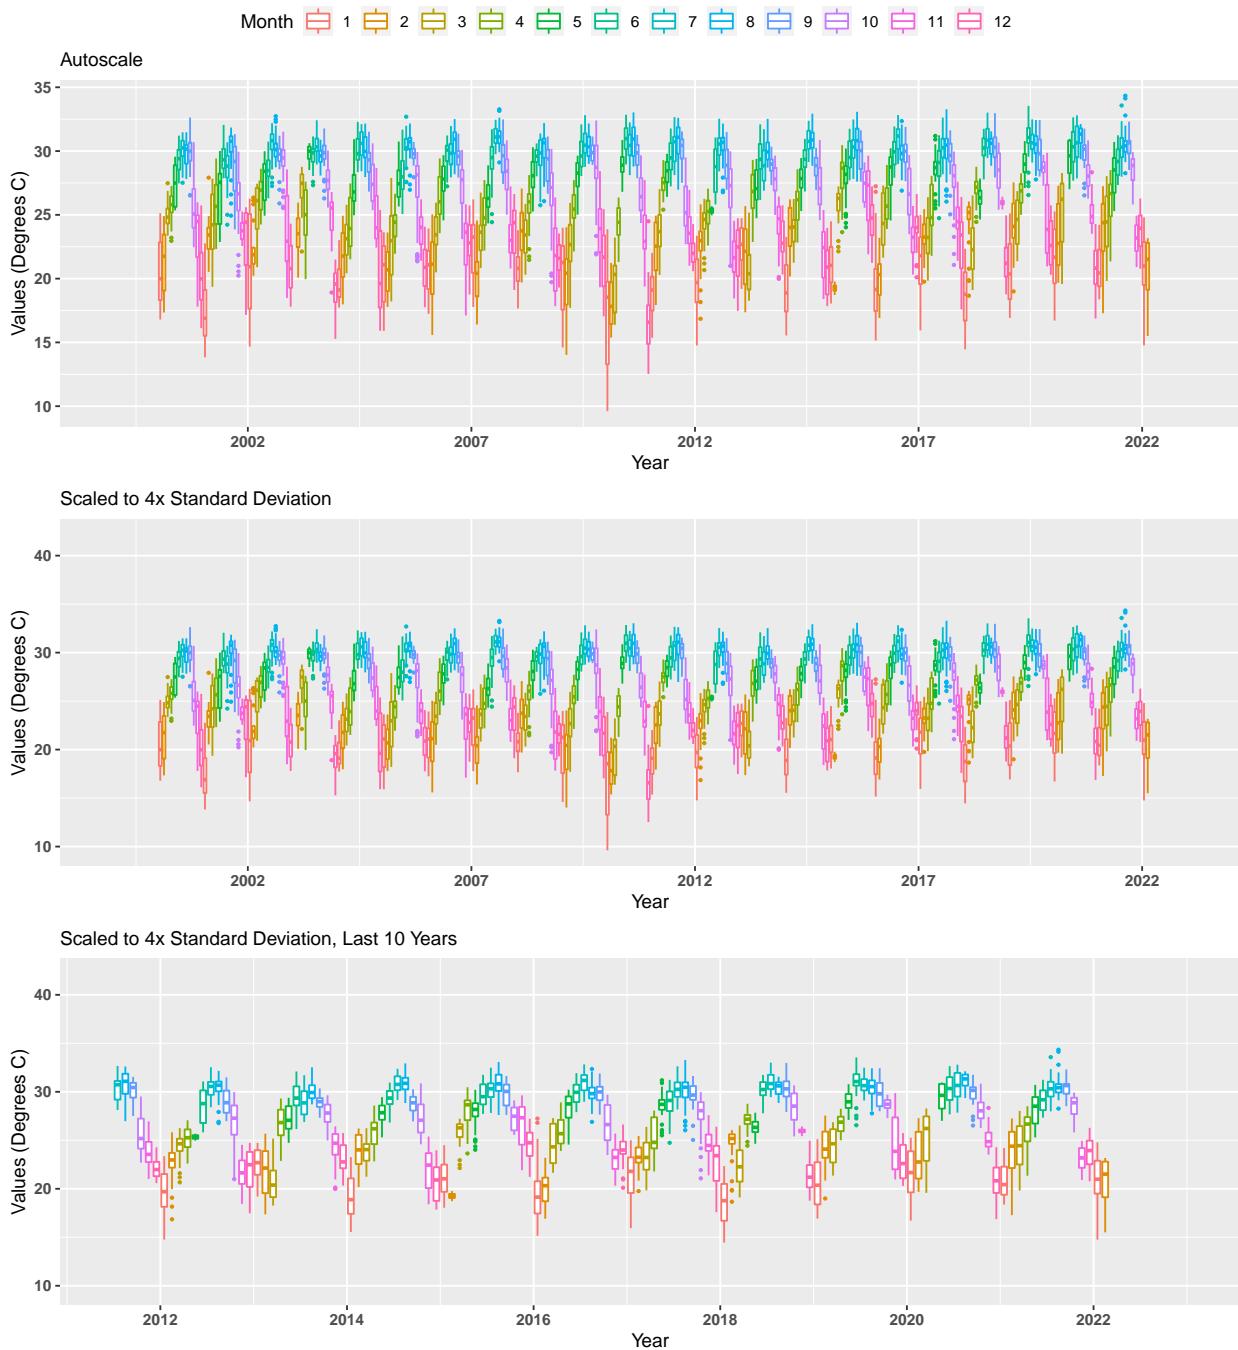


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbmbwq
 By Month

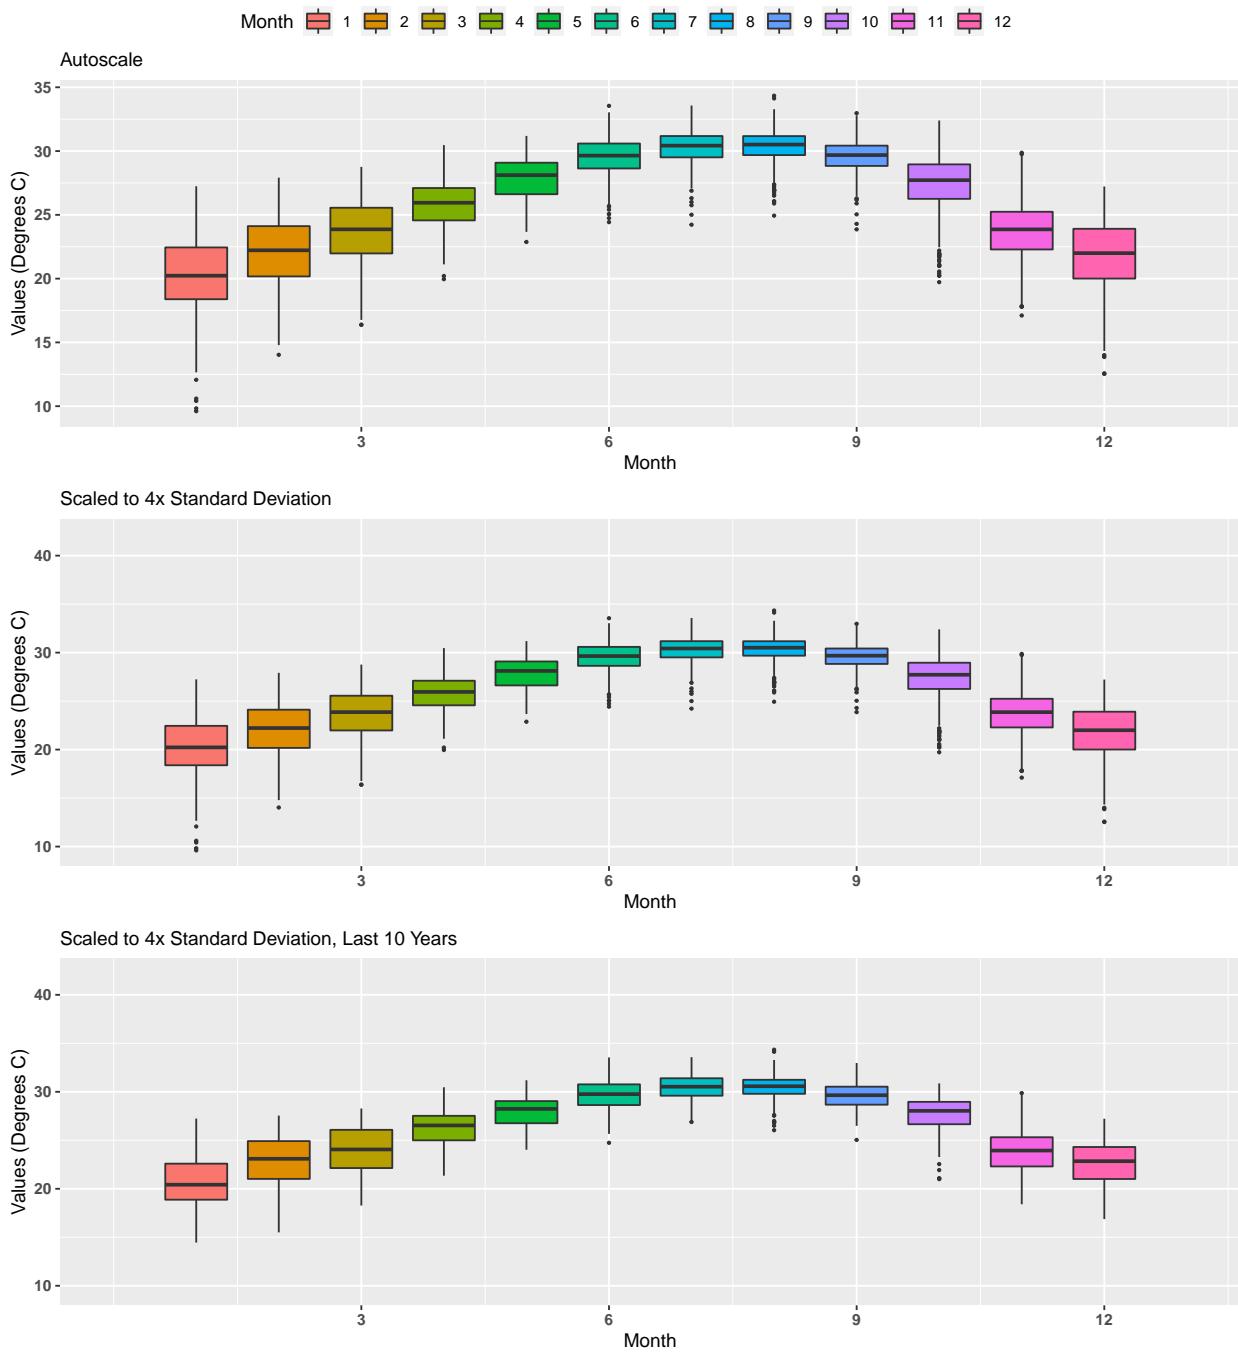


**Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbpbwq**
By Year

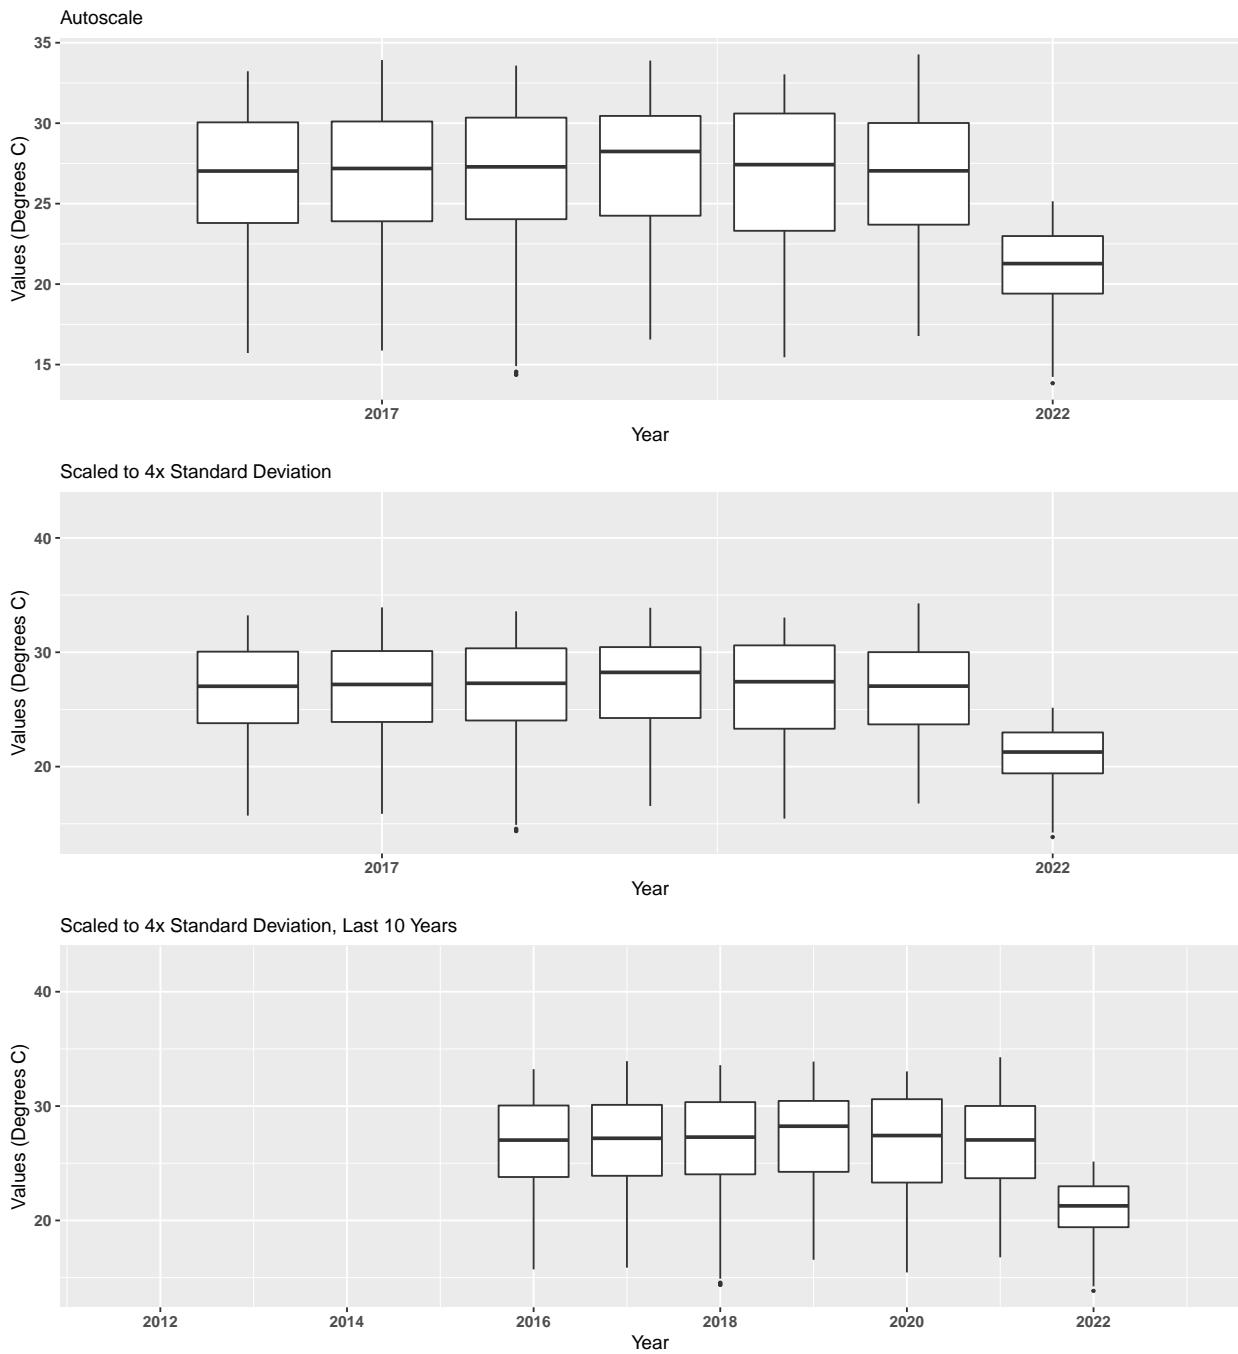

Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkpbwq
 By Year & Month

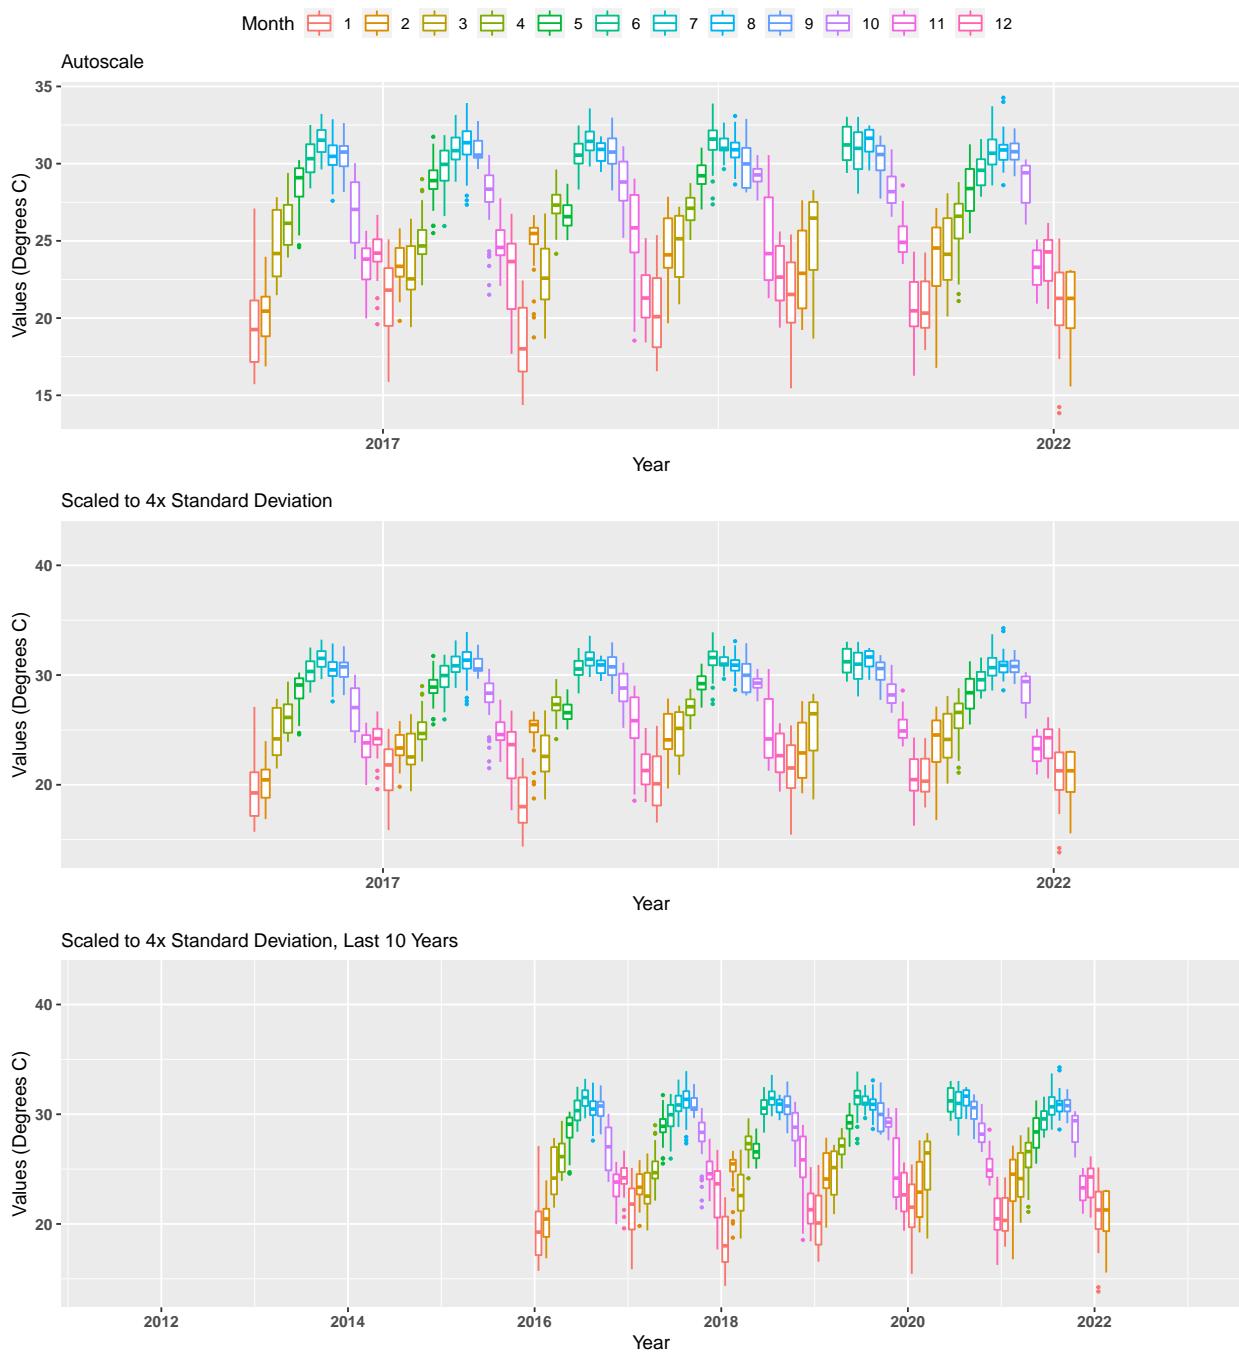


Summary Box Plots for Cape Romano–Ten Thousand Islands Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System–Wide Monitoring Program | rkbpbwq
 By Month

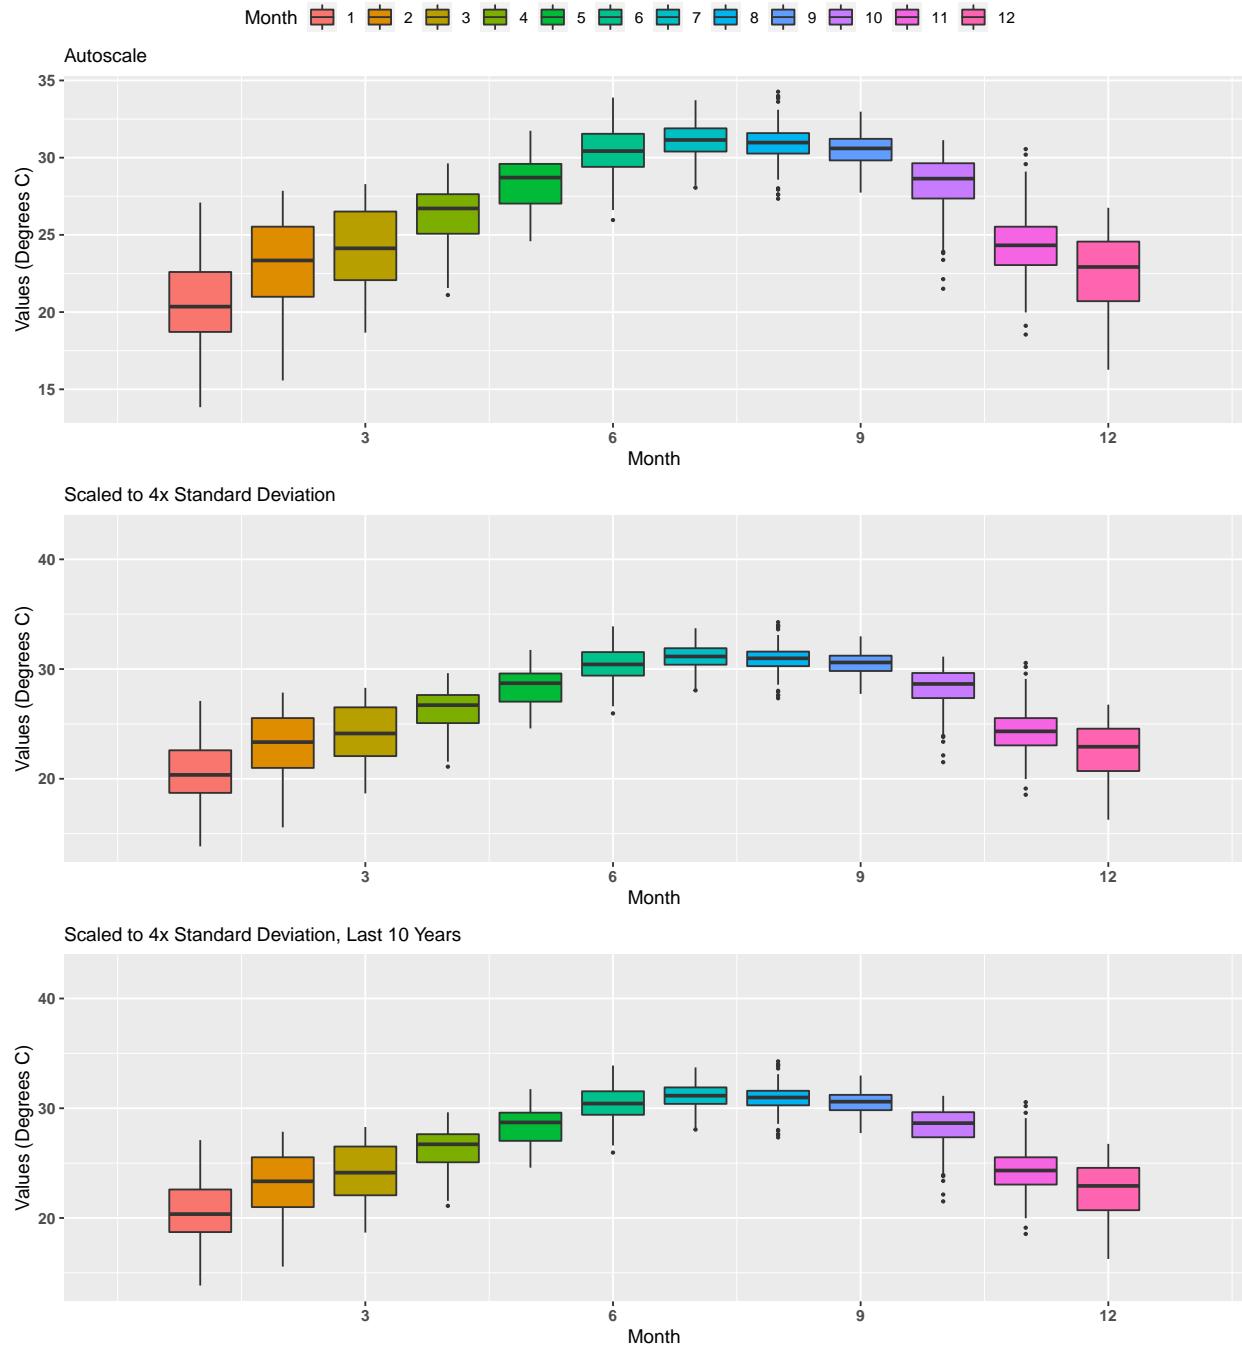


**Summary Box Plots for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB02**


By Year

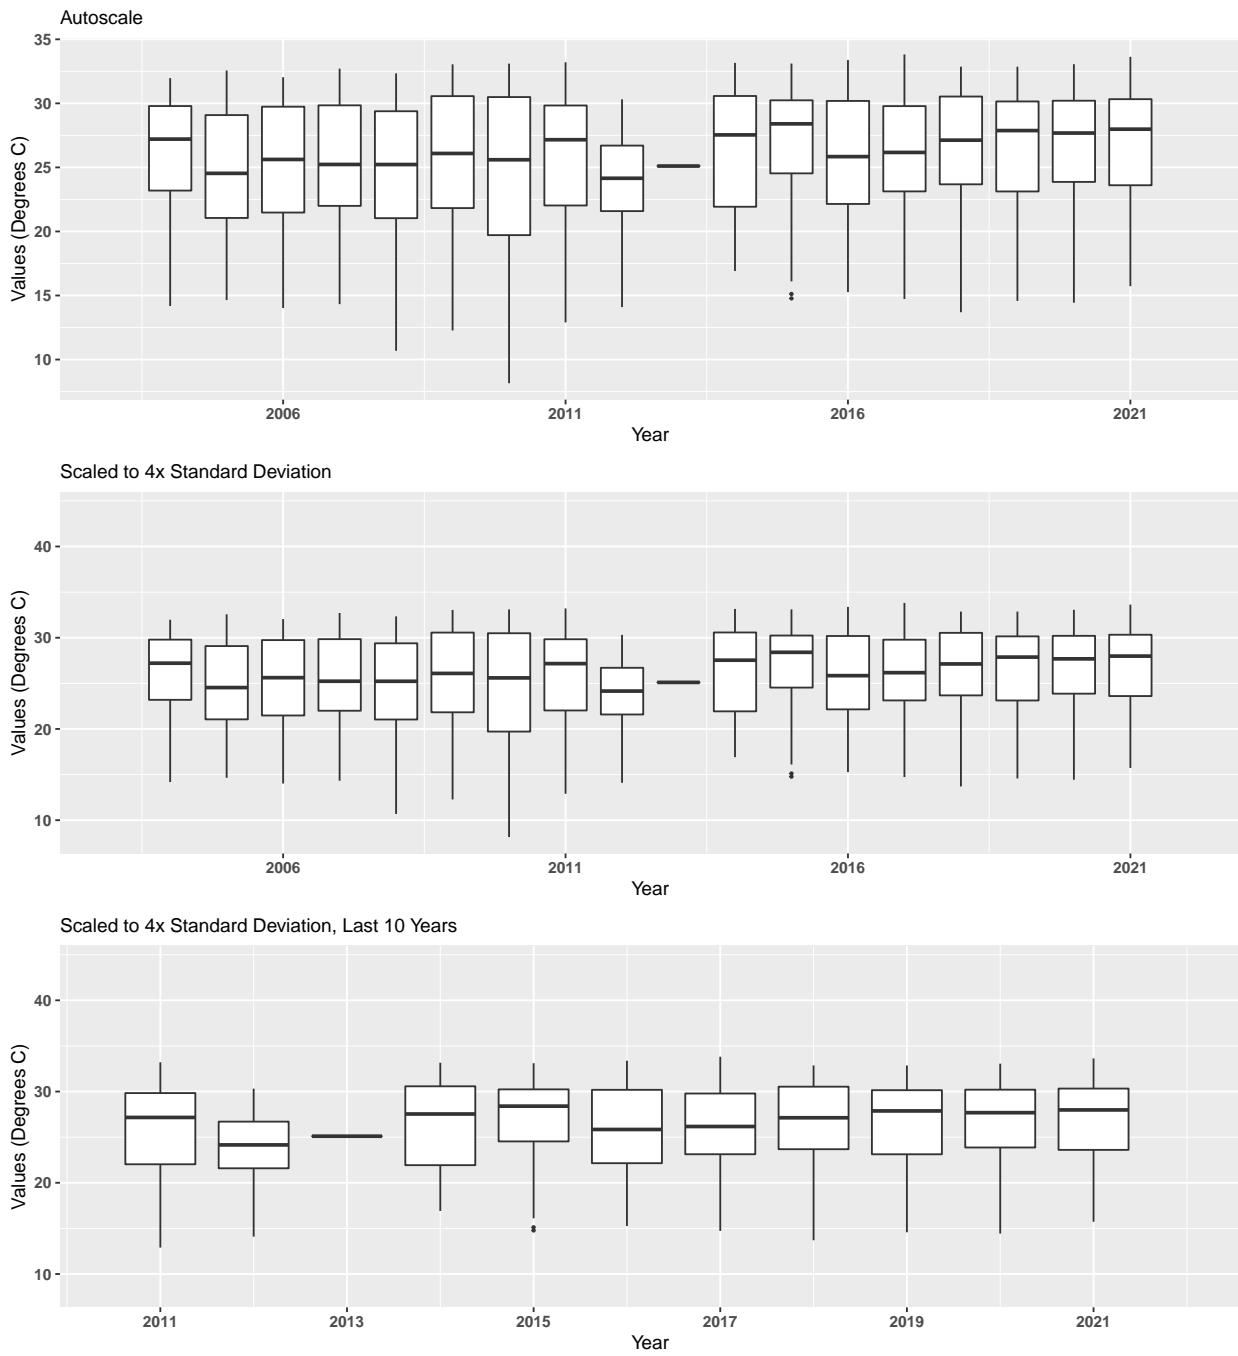


Summary Box Plots for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB02
 By Year & Month

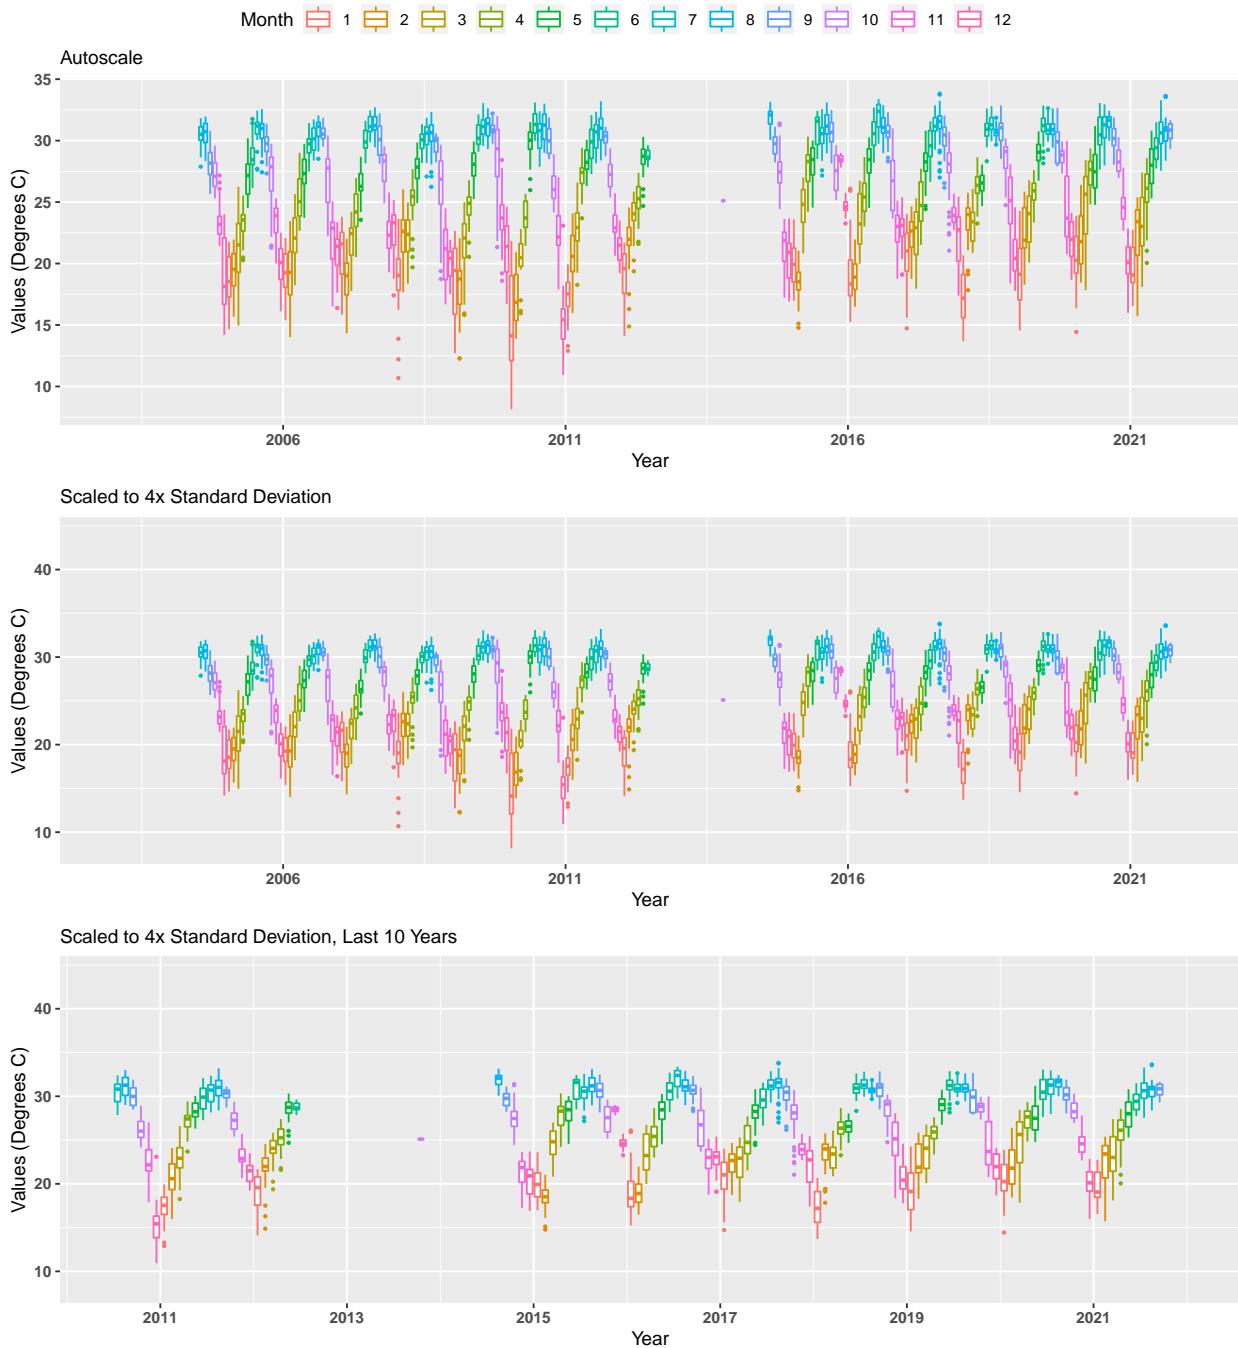


Summary Box Plots for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB02
 By Month

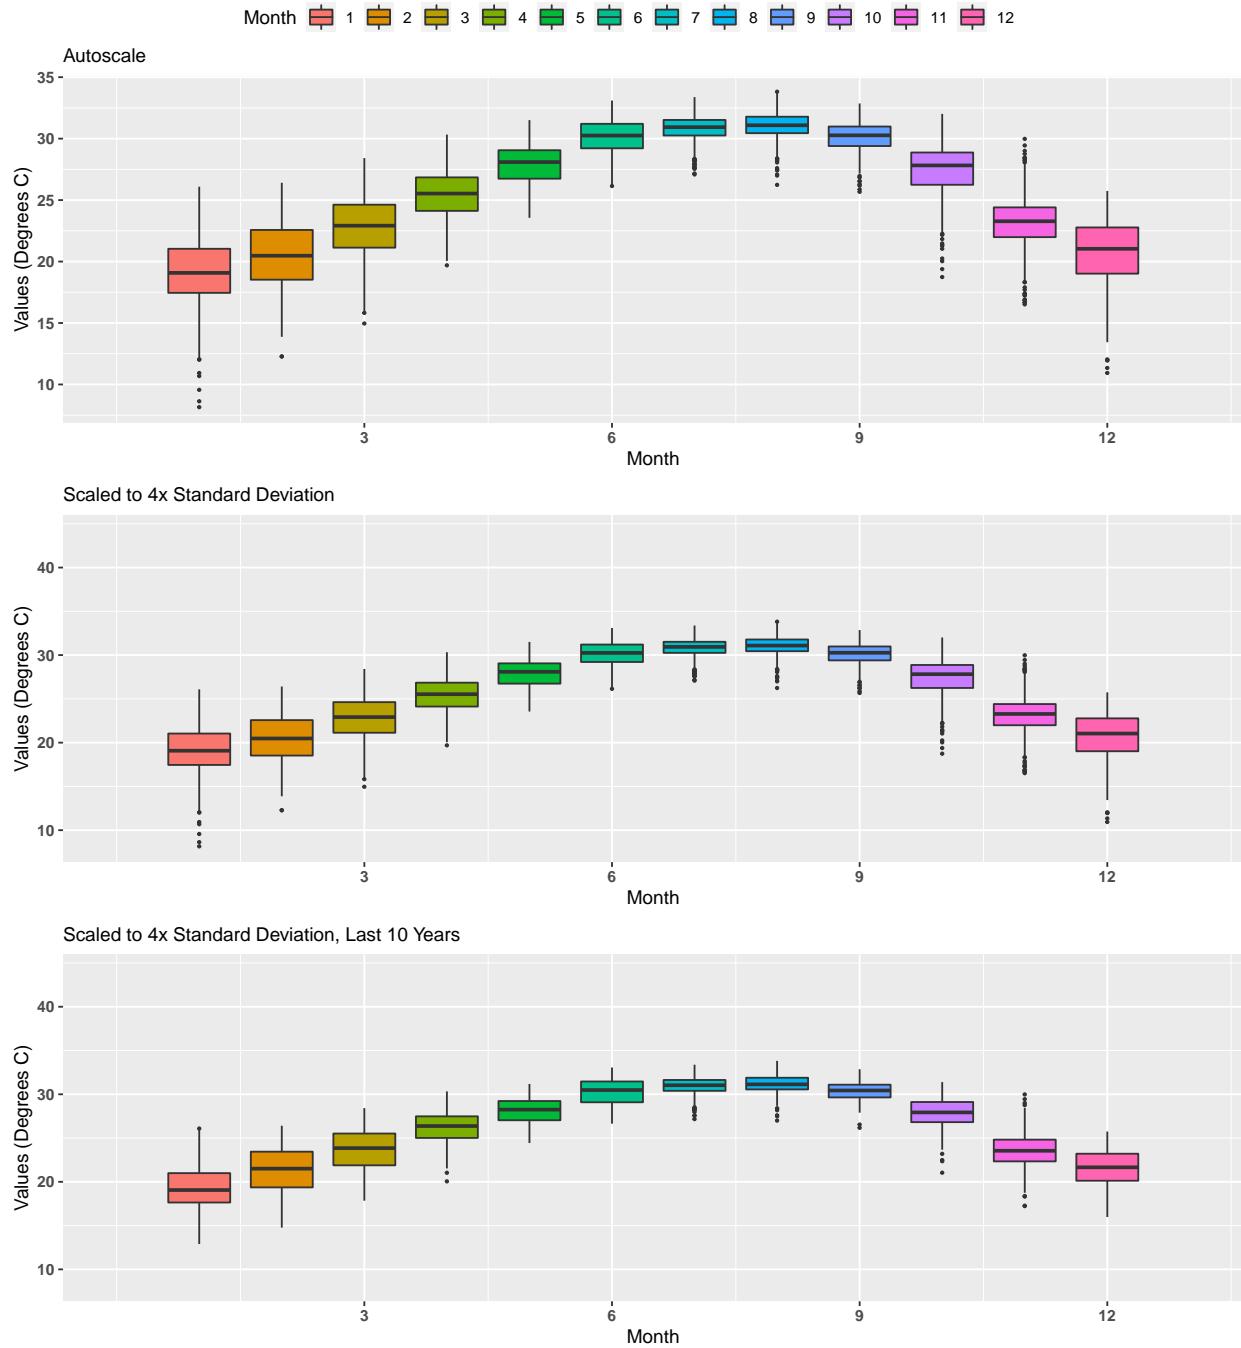


Summary Box Plots for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB03
By Year

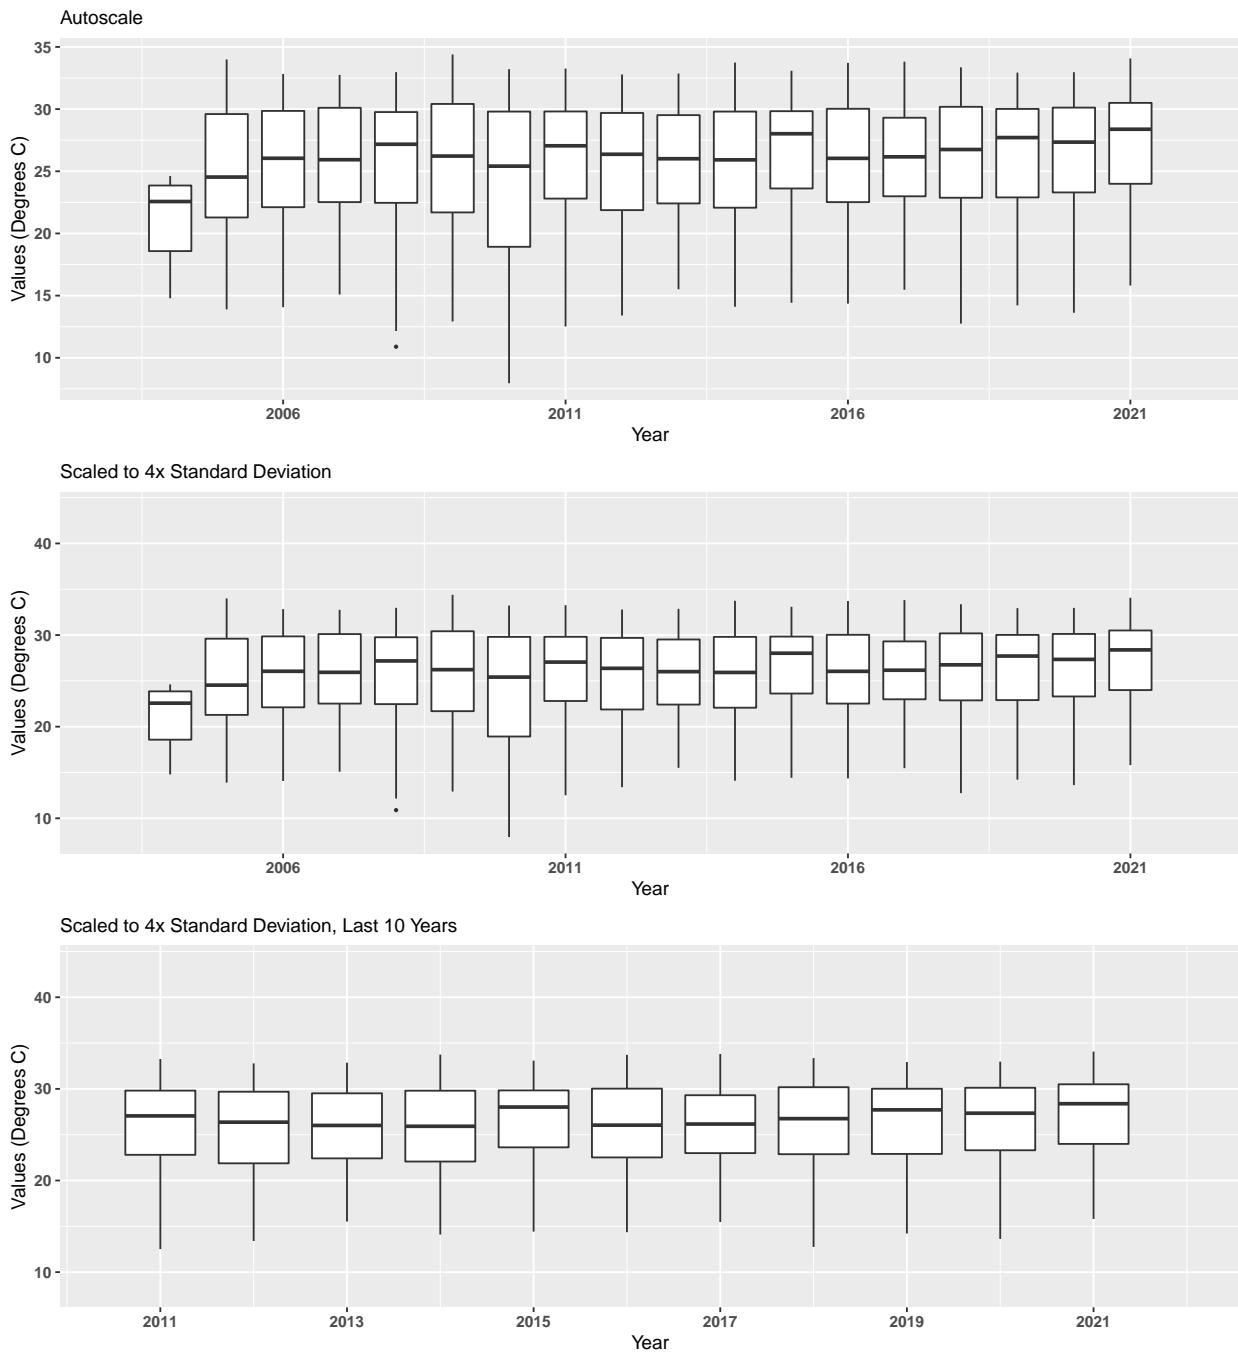


Summary Box Plots for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB03
 By Year & Month

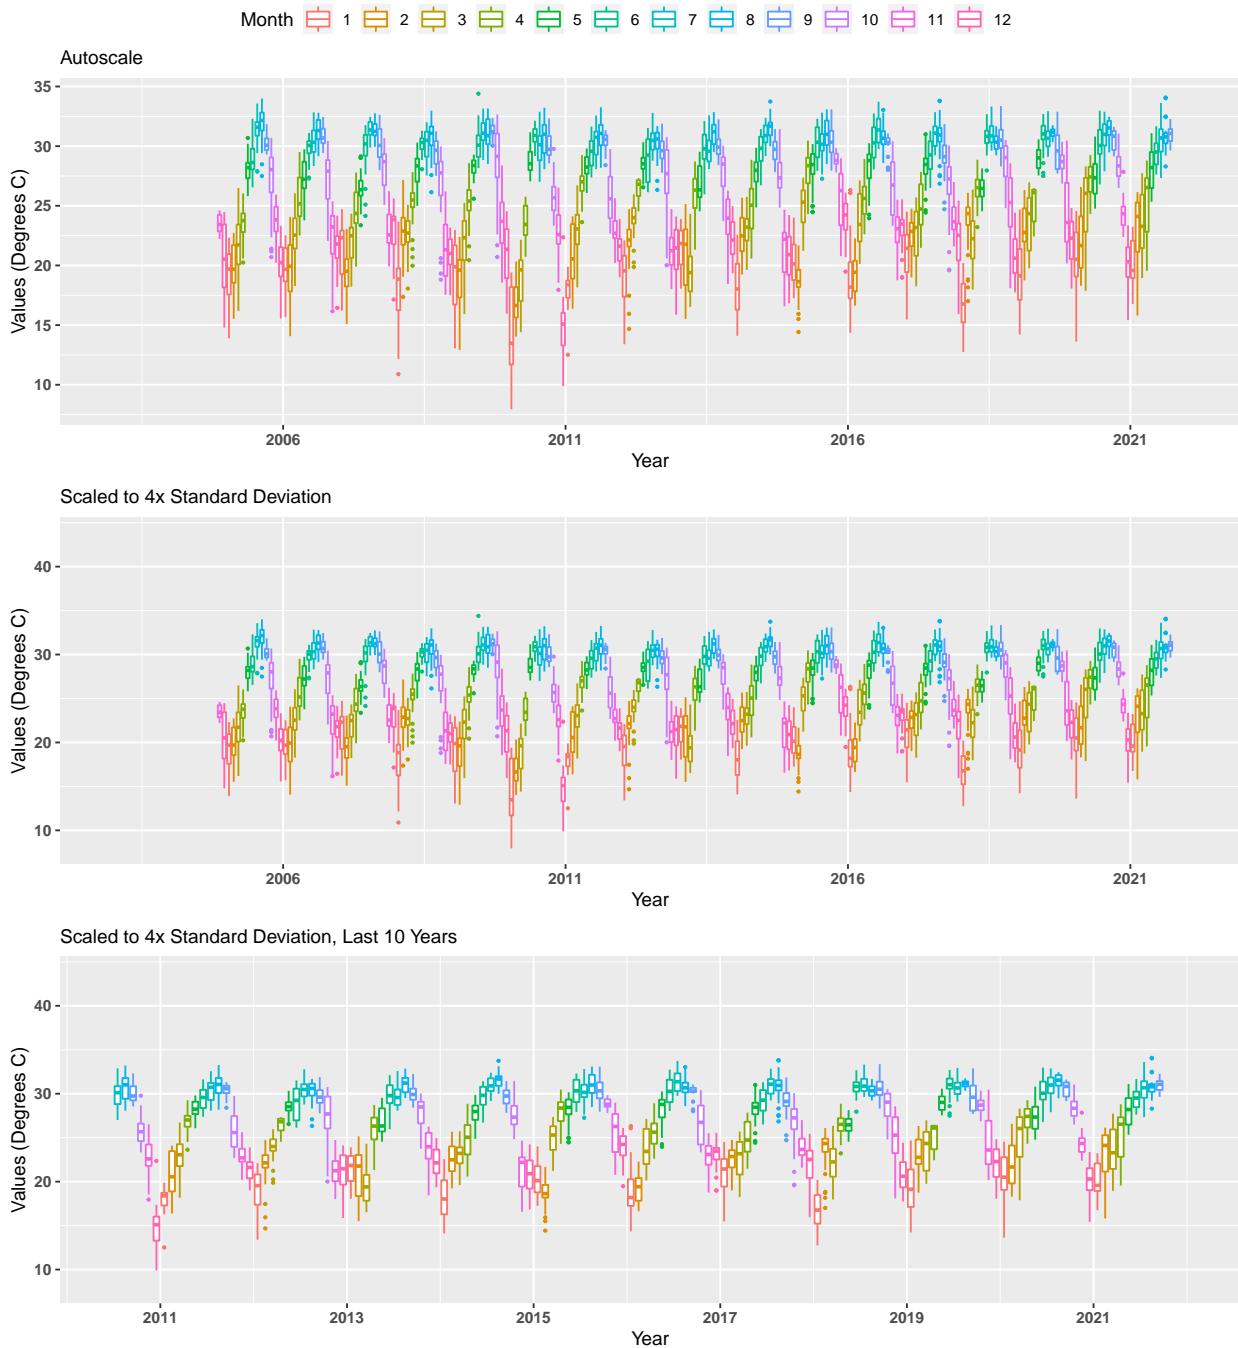


Summary Box Plots for Estero Bay Aquatic Preserve
474 | Estero Bay Aquatic Preserve Continuous Water Quality Monitoring | EB03
 By Month

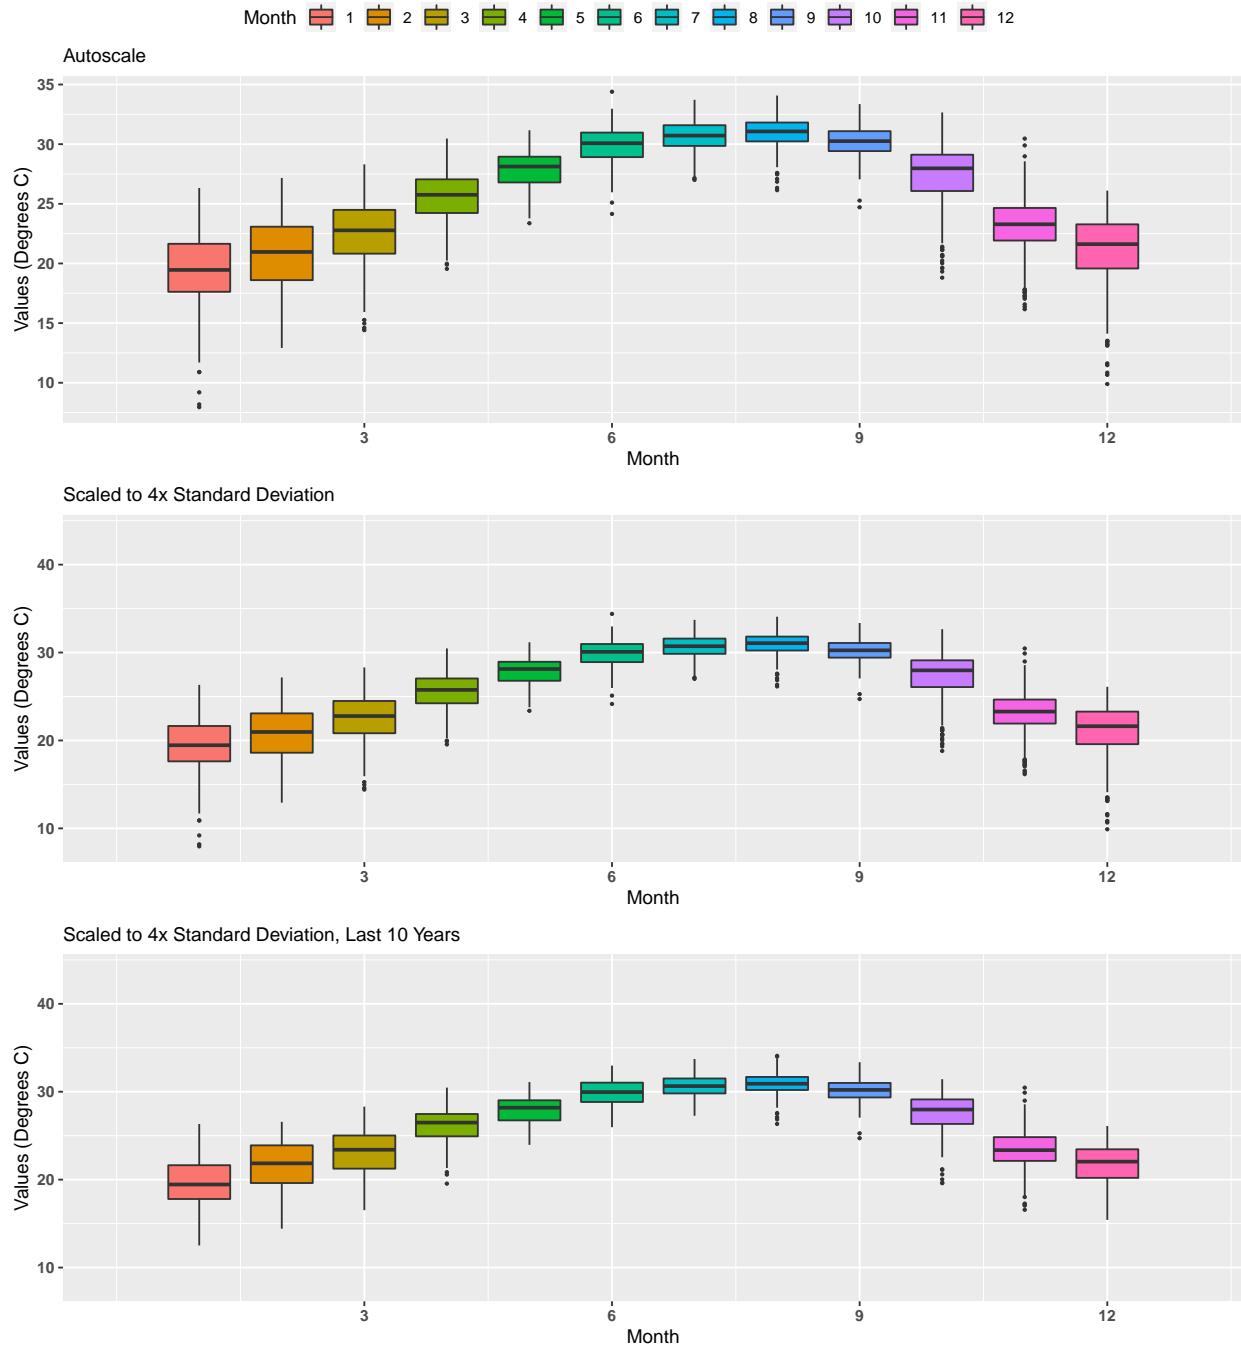

Summary Box Plots for Matlacha Pass Aquatic Preserve
512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP1A
By Year

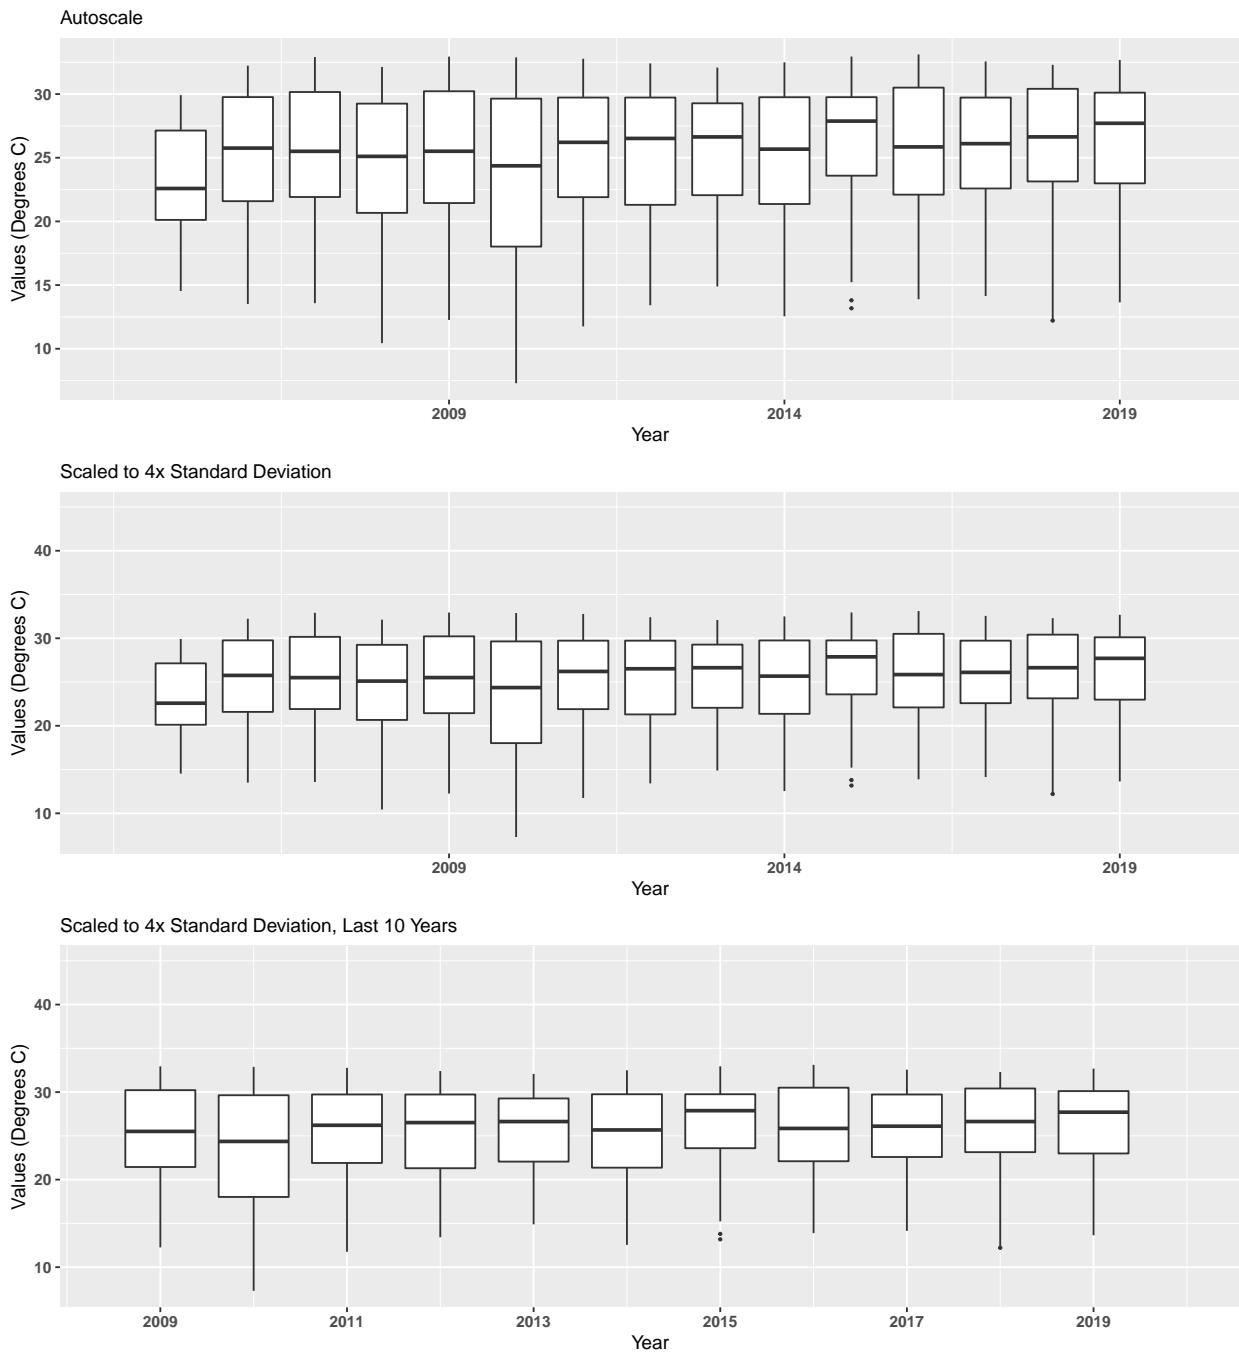


Summary Box Plots for Matlacha Pass Aquatic Preserve
512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP1A
 By Year & Month

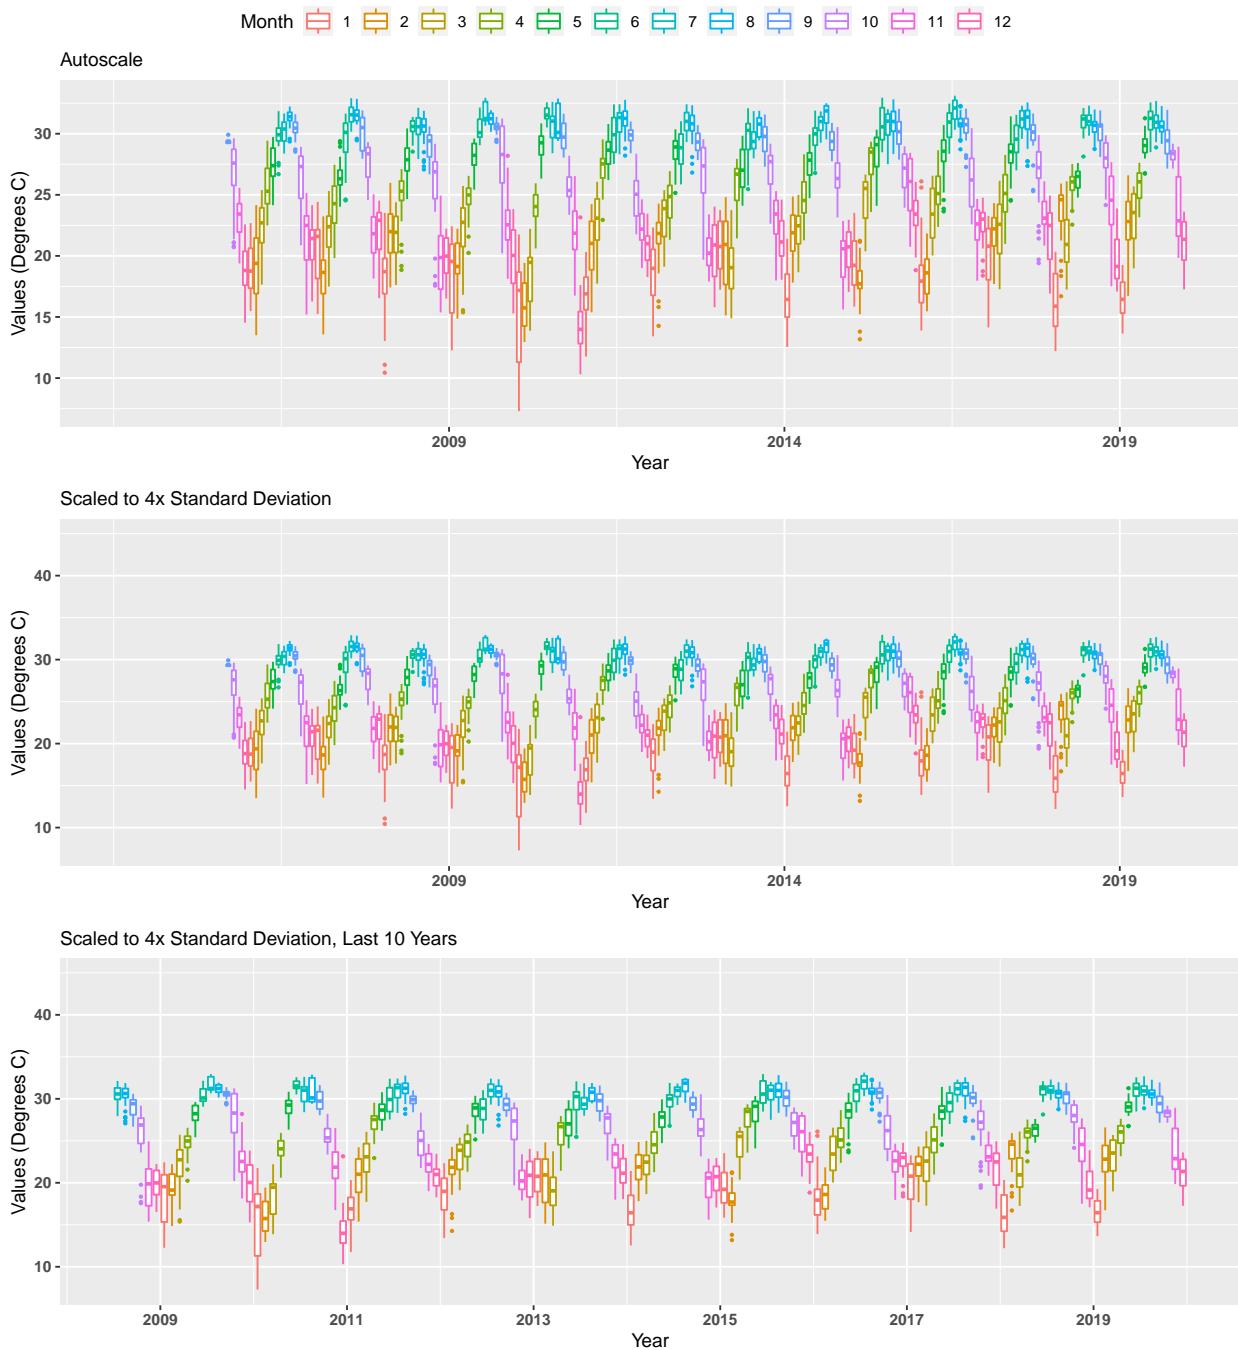


Summary Box Plots for Matlacha Pass Aquatic Preserve

512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP1A

By Month

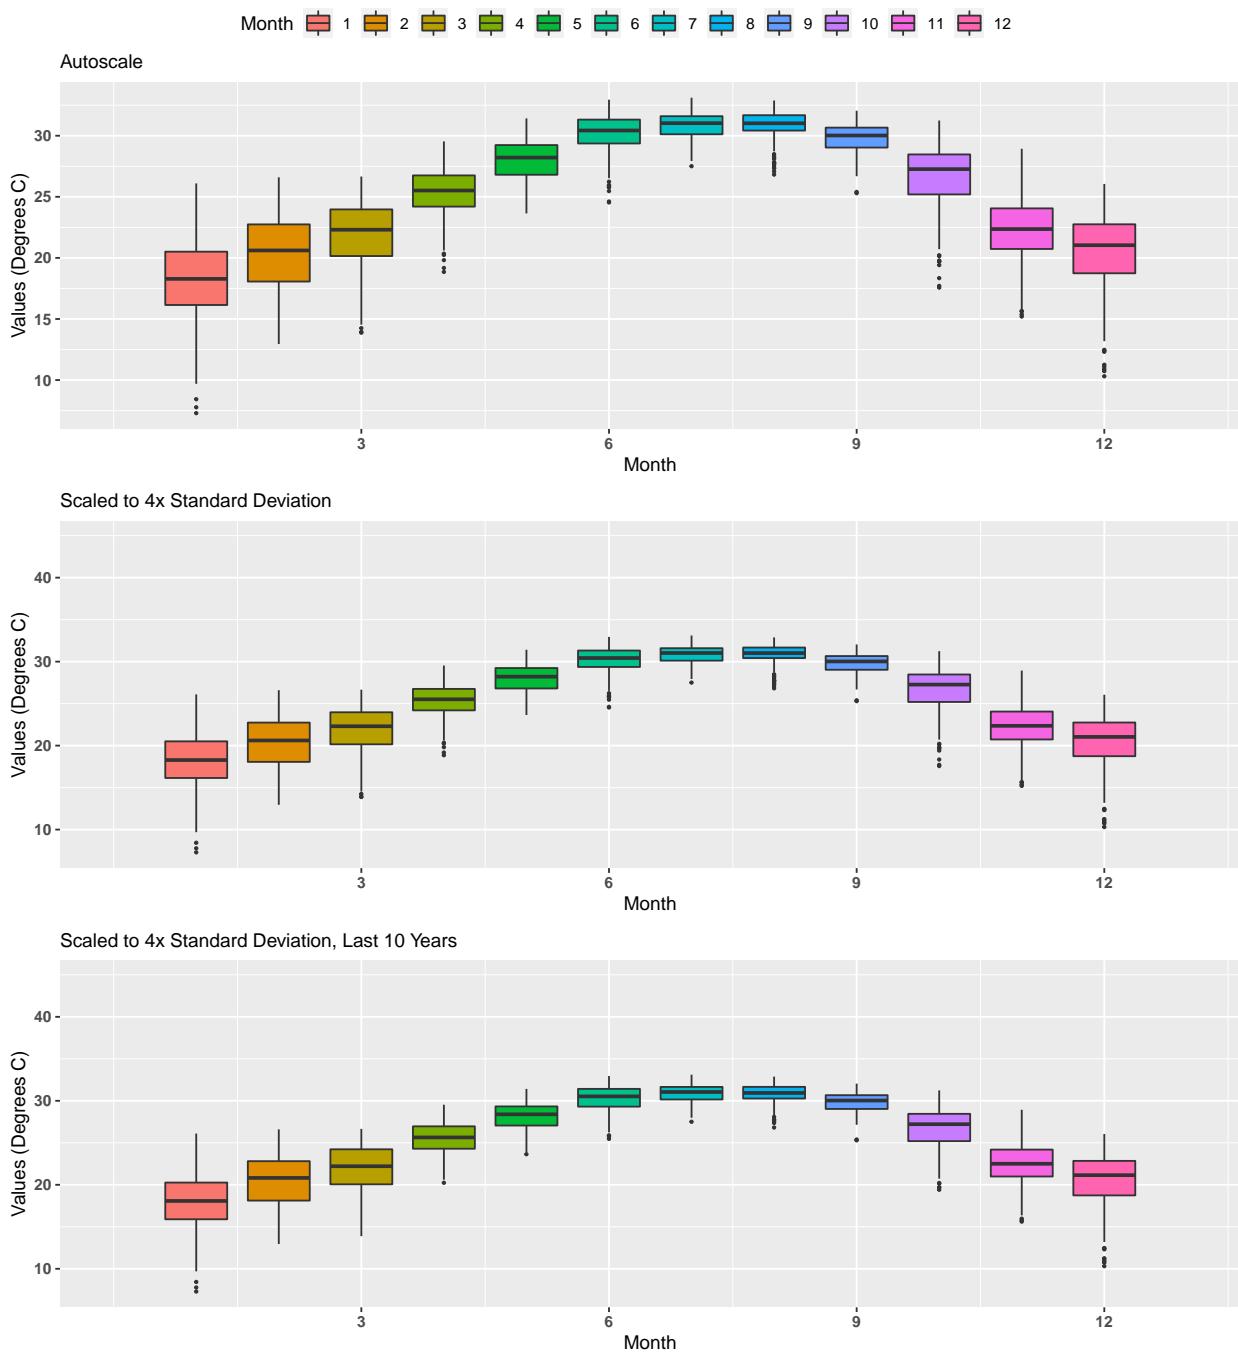


Summary Box Plots for Matlacha Pass Aquatic Preserve
512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP2B
By Year

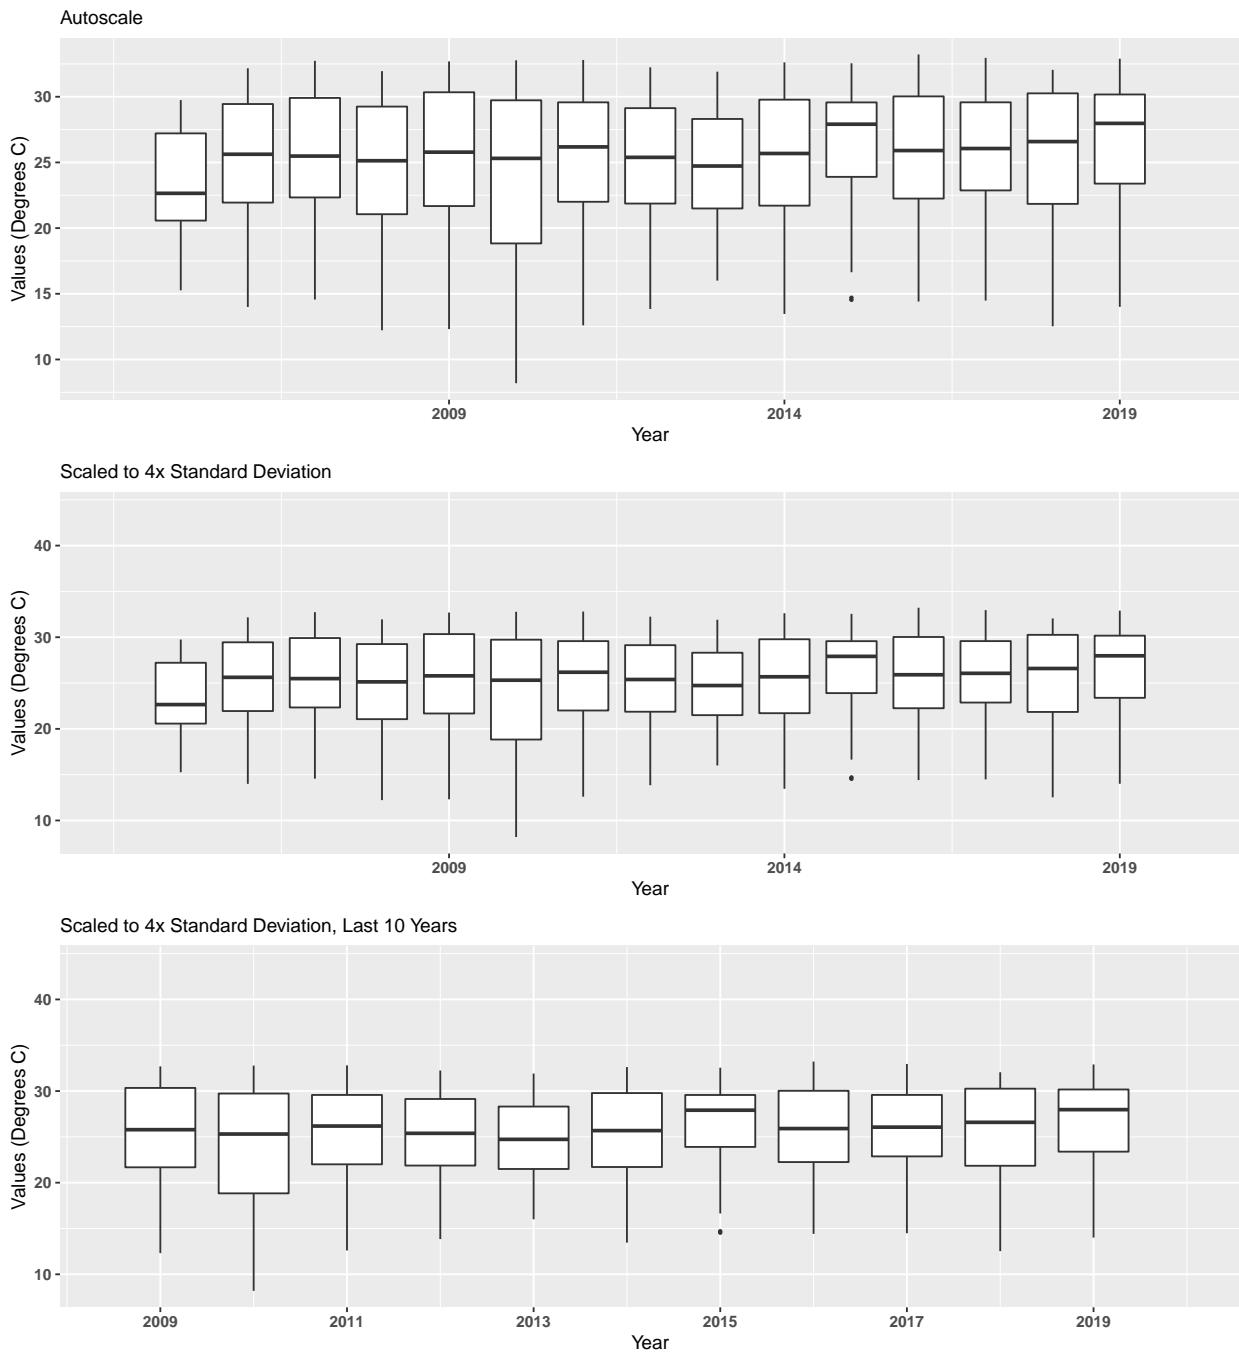

Summary Box Plots for Matlacha Pass Aquatic Preserve

512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP2B


By Year & Month

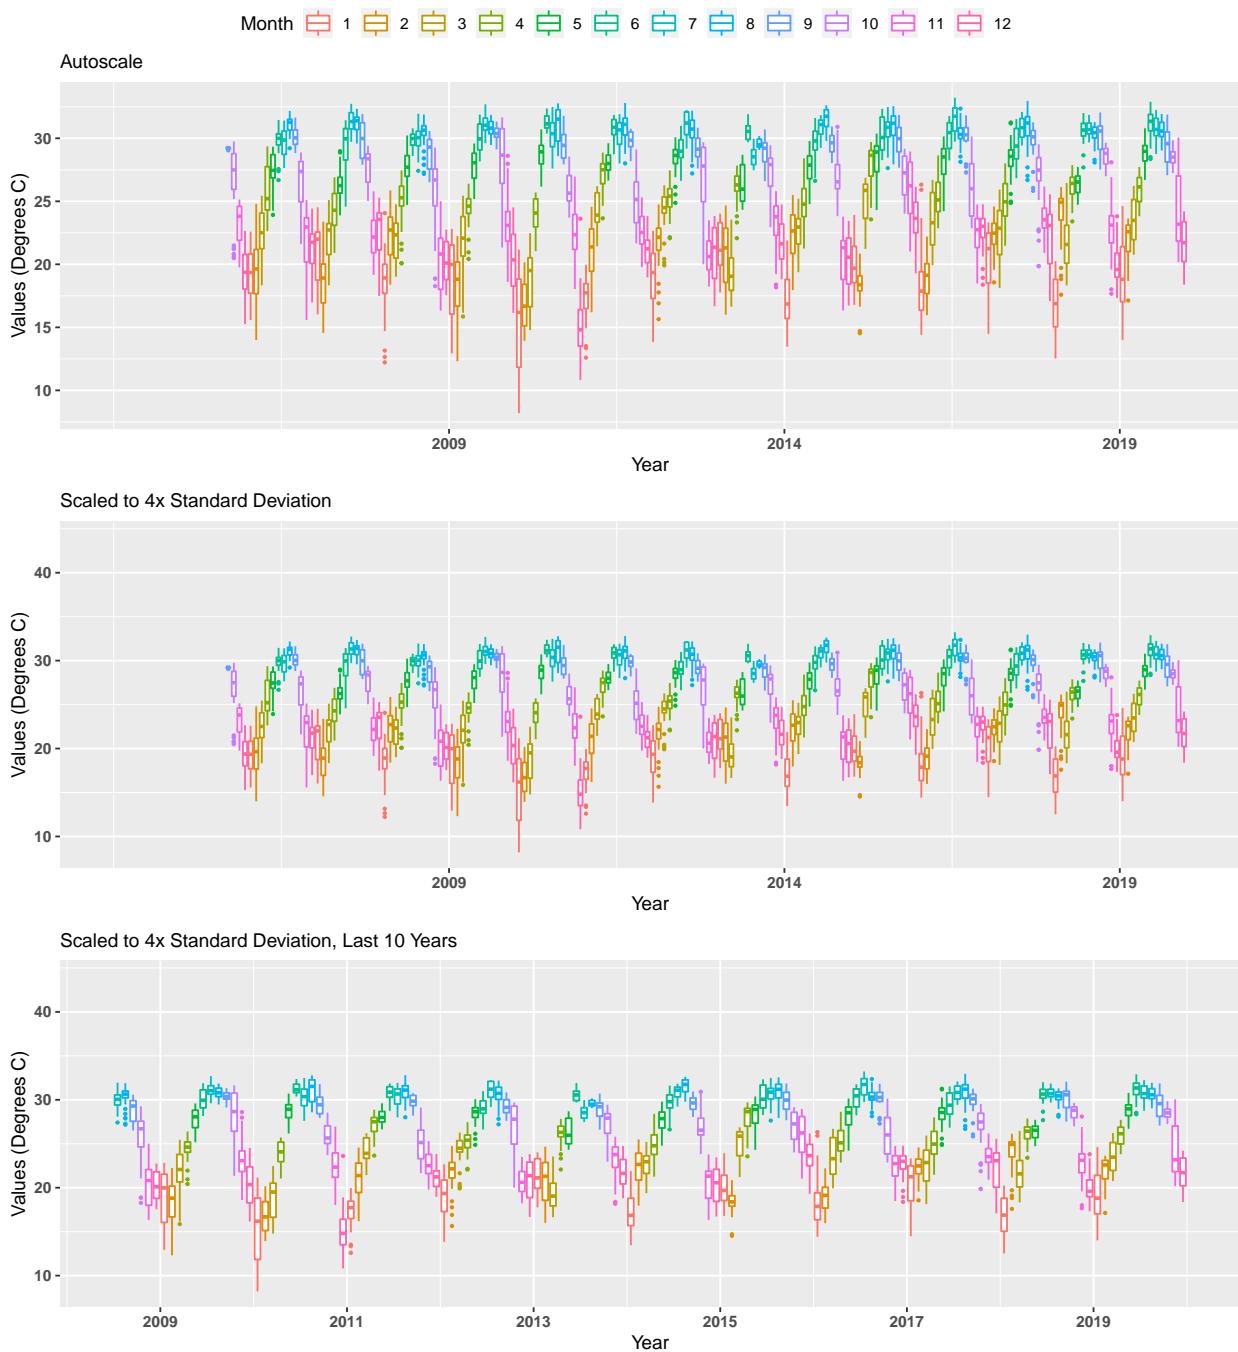


Summary Box Plots for Matlacha Pass Aquatic Preserve

512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP2B


By Month

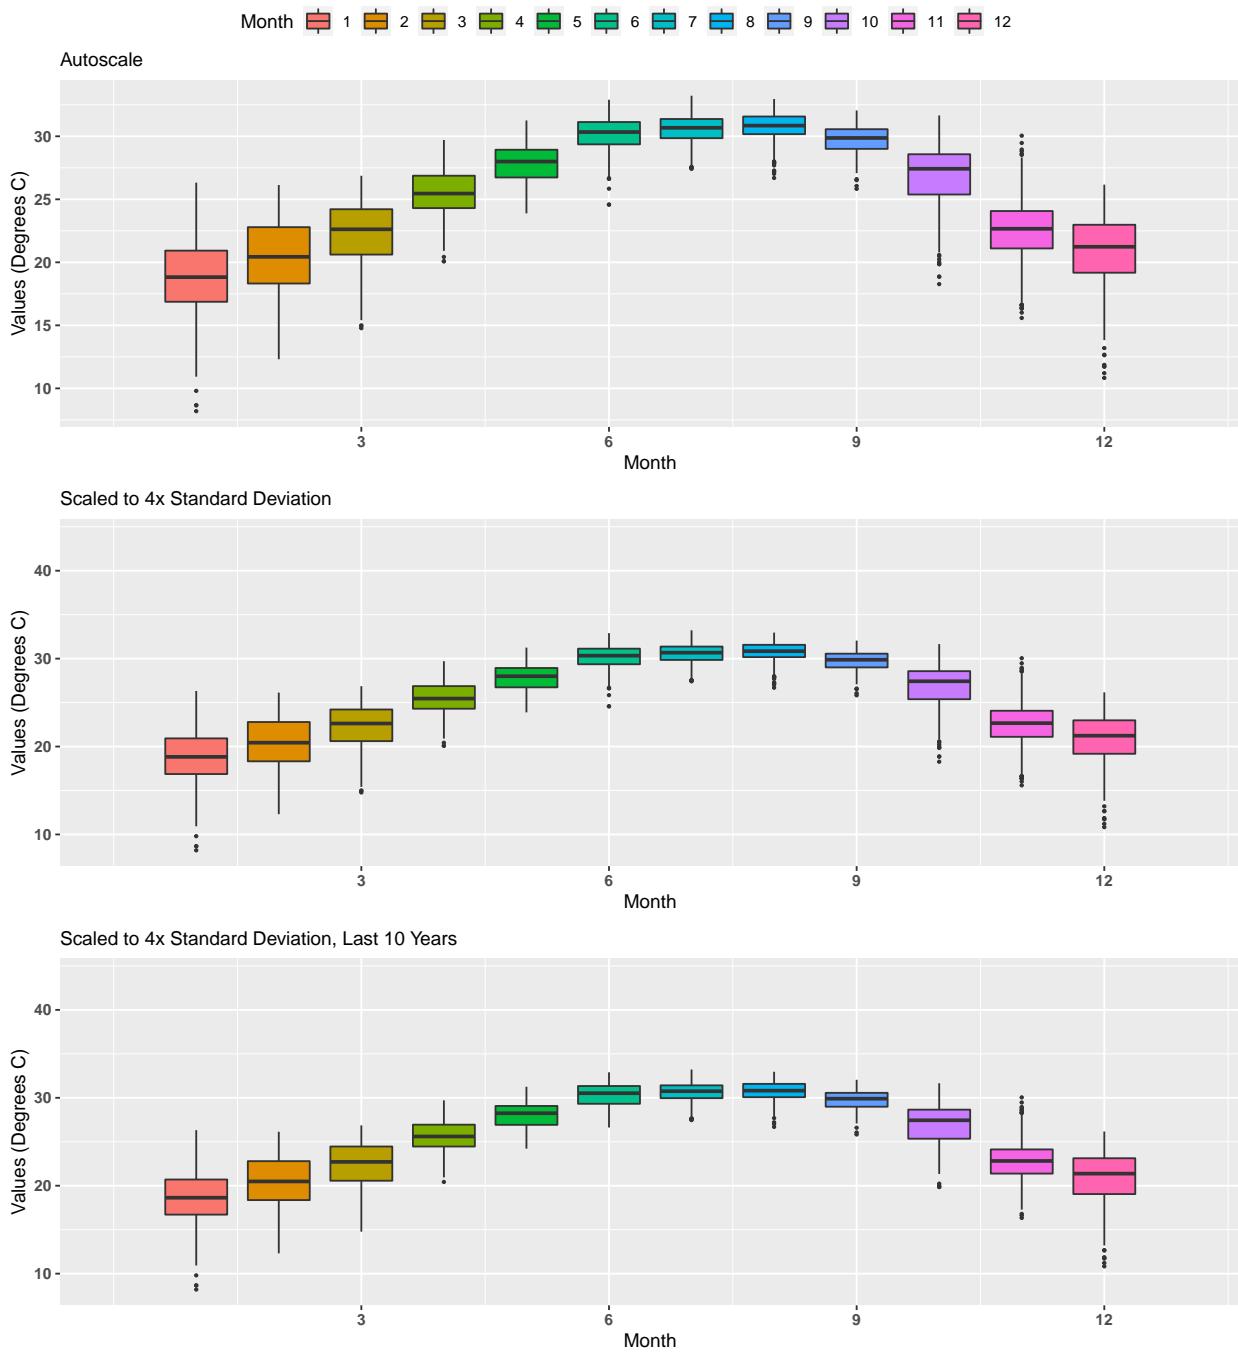


Summary Box Plots for Matlacha Pass Aquatic Preserve
512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP3C
By Year

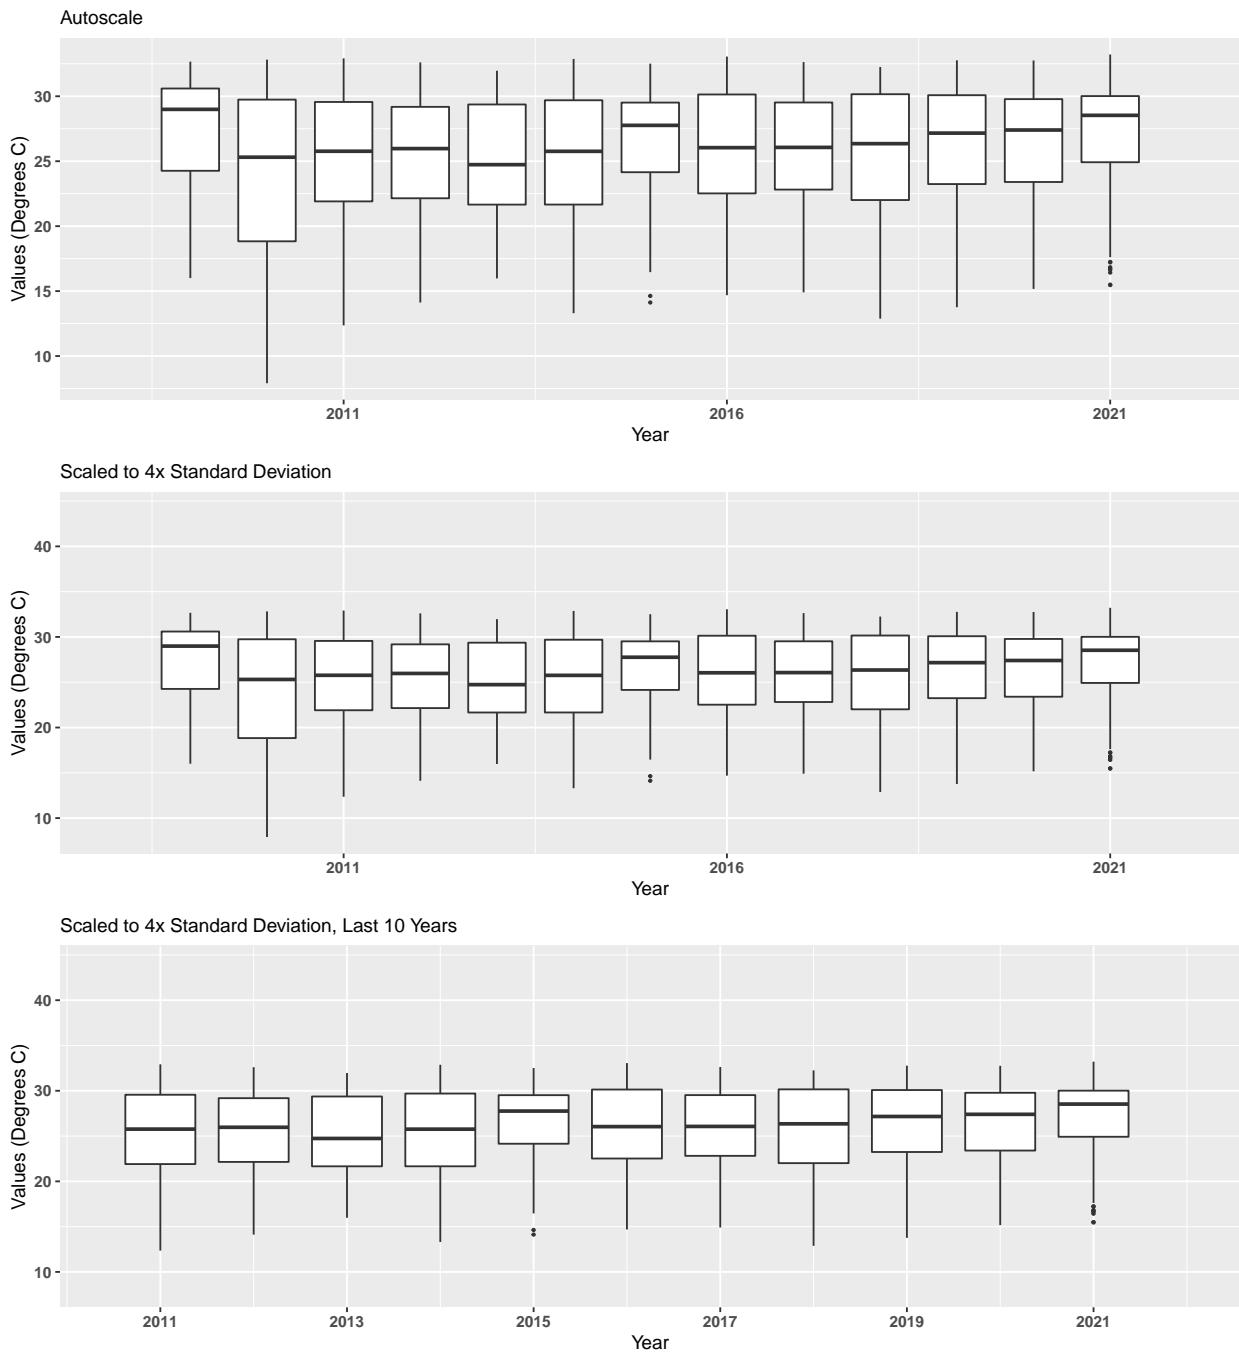

Summary Box Plots for Matlacha Pass Aquatic Preserve
512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP3C
 By Year & Month

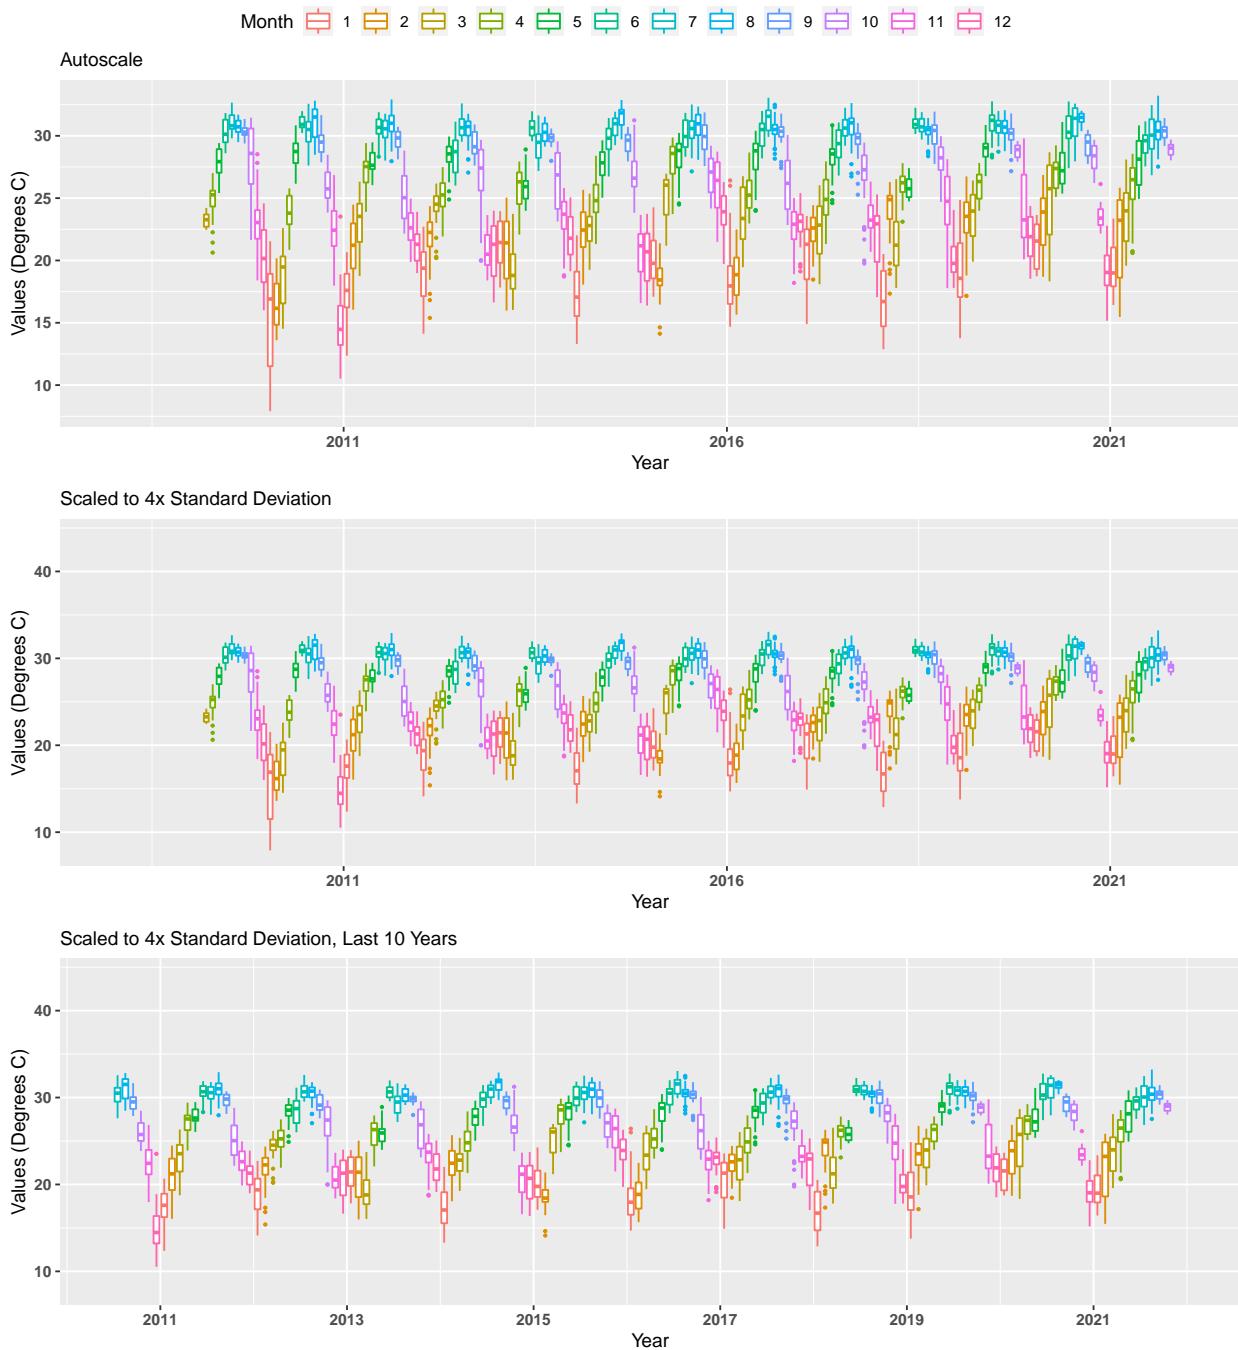


Summary Box Plots for Matlacha Pass Aquatic Preserve
512 | Matlacha Pass Aquatic Preserve Continuous Water Quality Monitoring Program | MP3C
 By Month

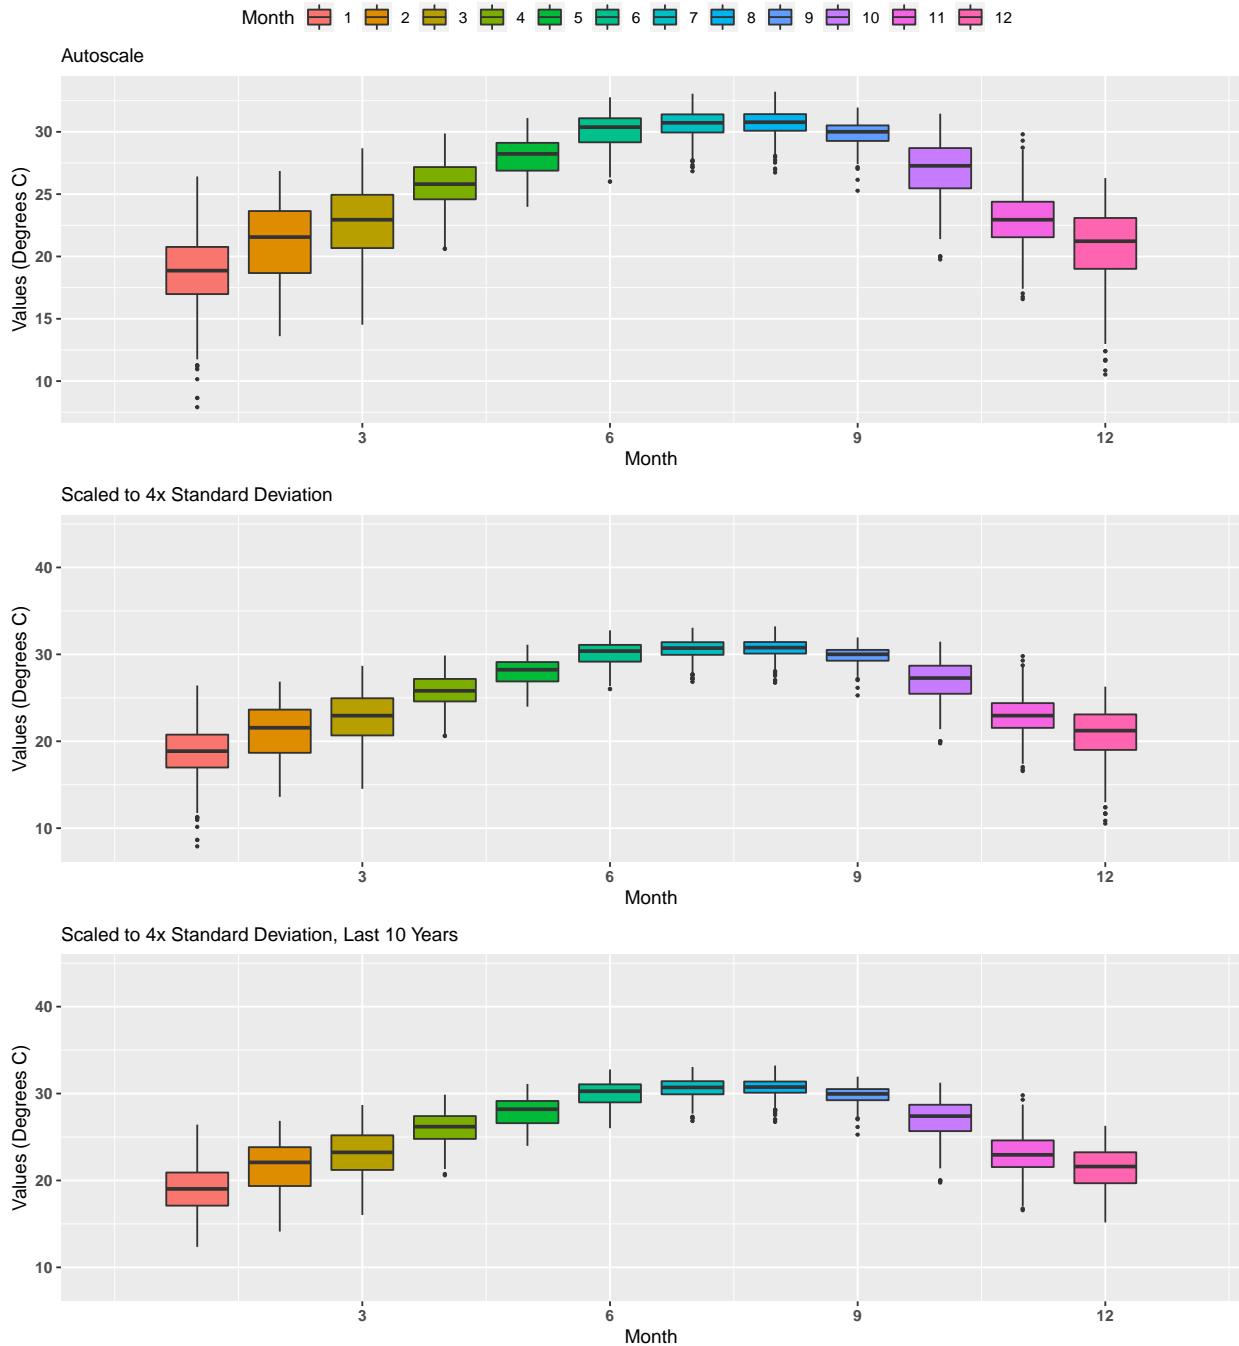

Summary Box Plots for Pinellas County Aquatic Preserve

5 | National Data Buoy Center | CWBF1


By Year

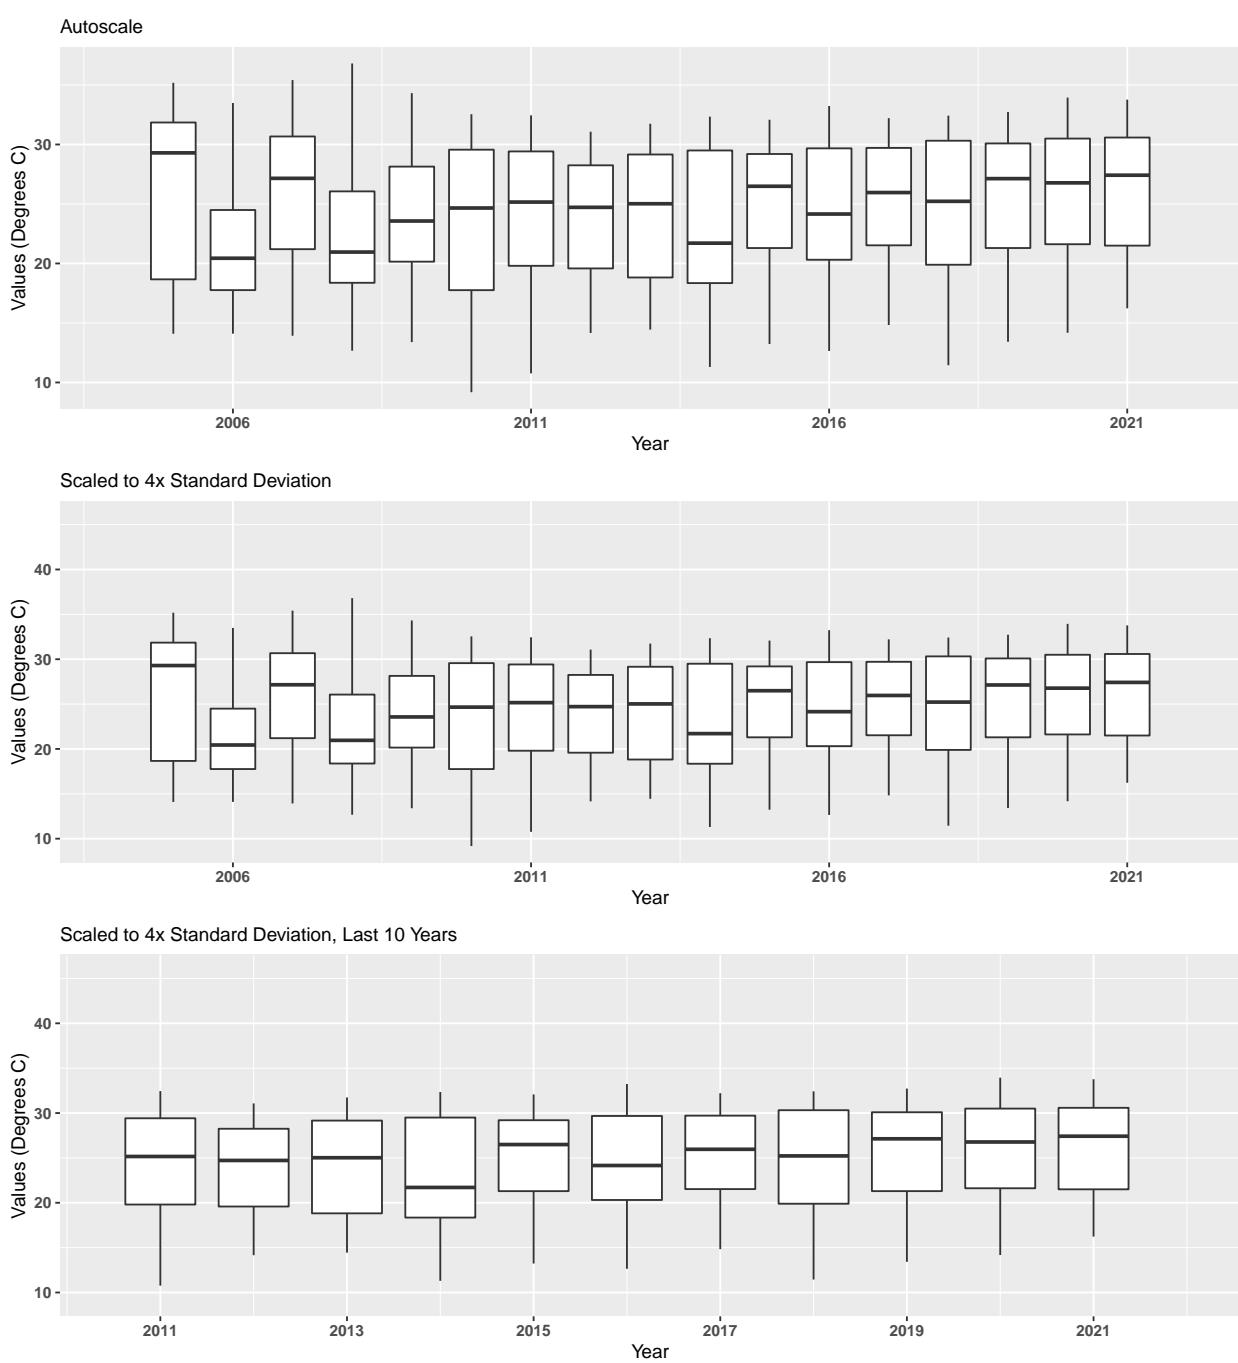

Summary Box Plots for Pinellas County Aquatic Preserve

5 | National Data Buoy Center | CWF1


By Year & Month

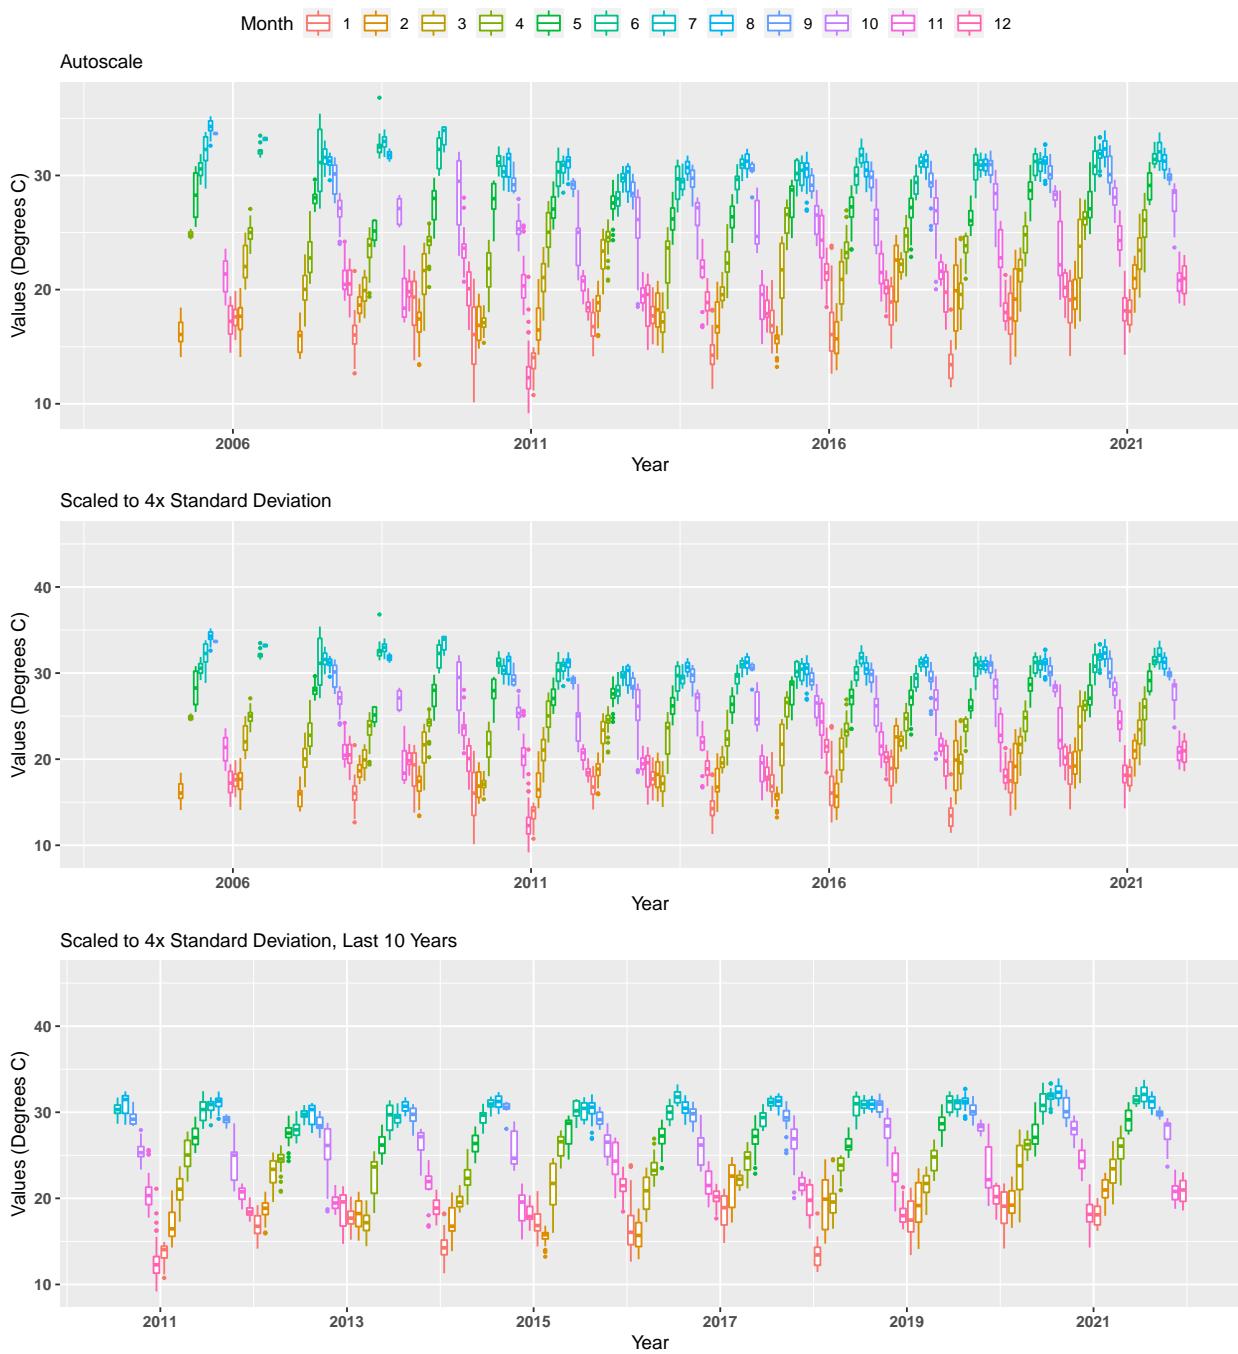


Summary Box Plots for Pinellas County Aquatic Preserve

5 | National Data Buoy Center | CWF1


By Month

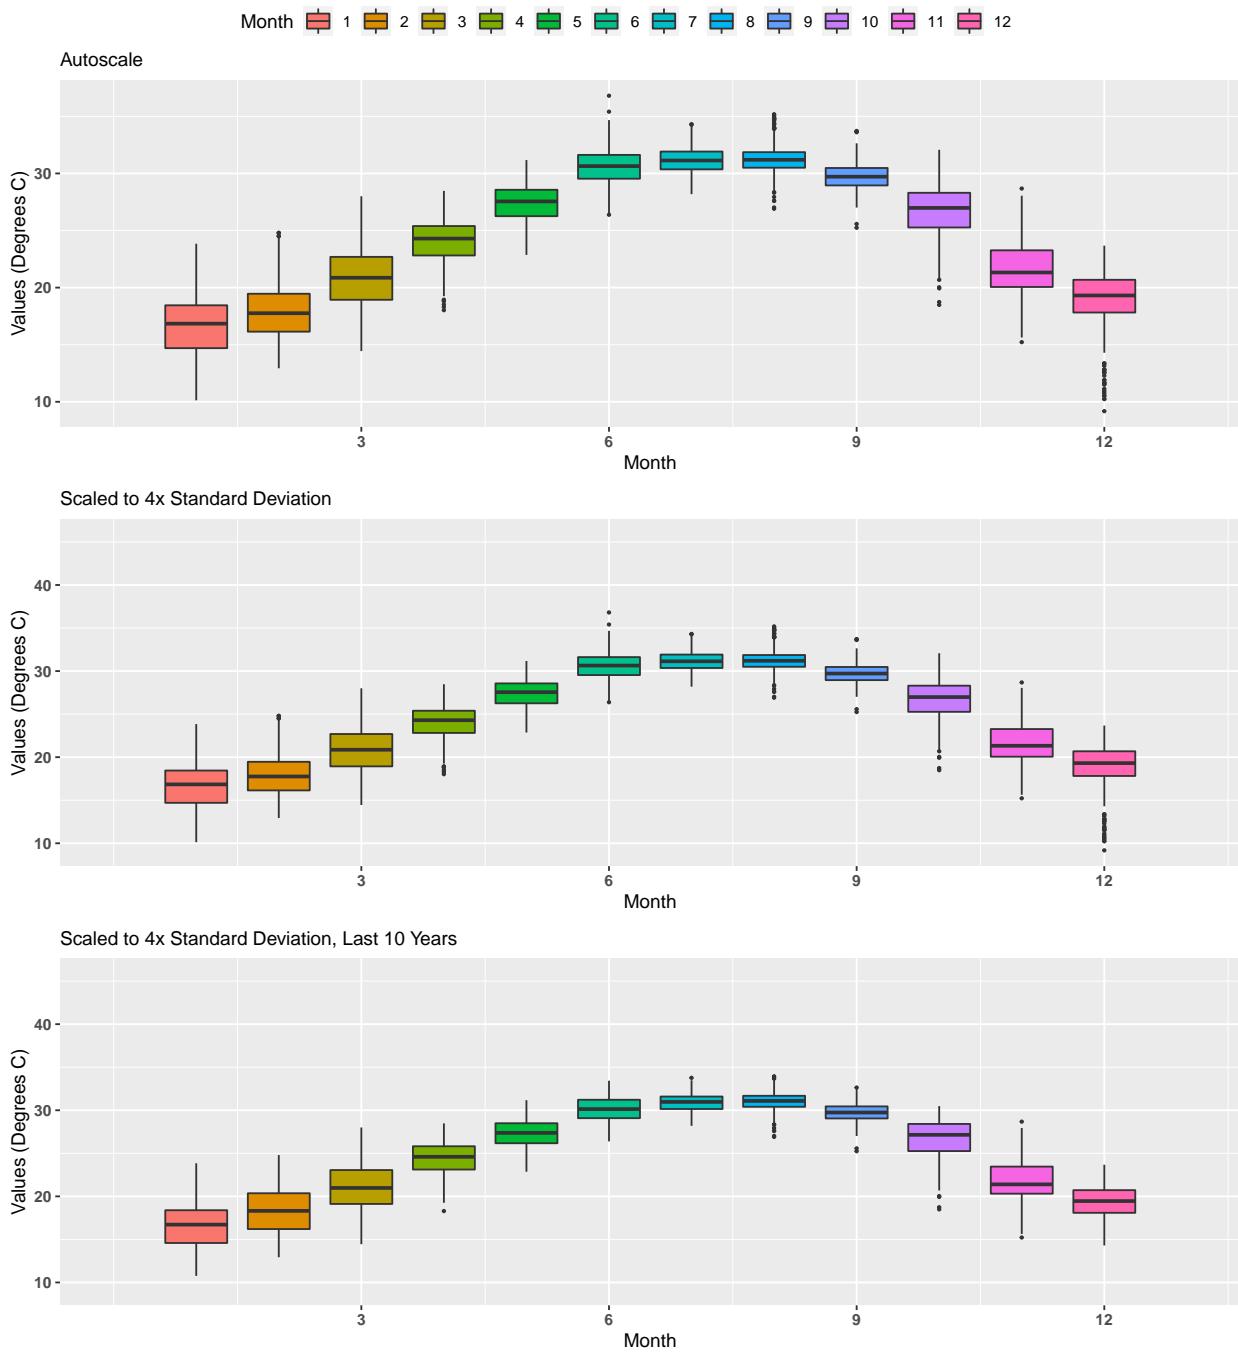

Summary Box Plots for Rookery Bay Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq
By Year

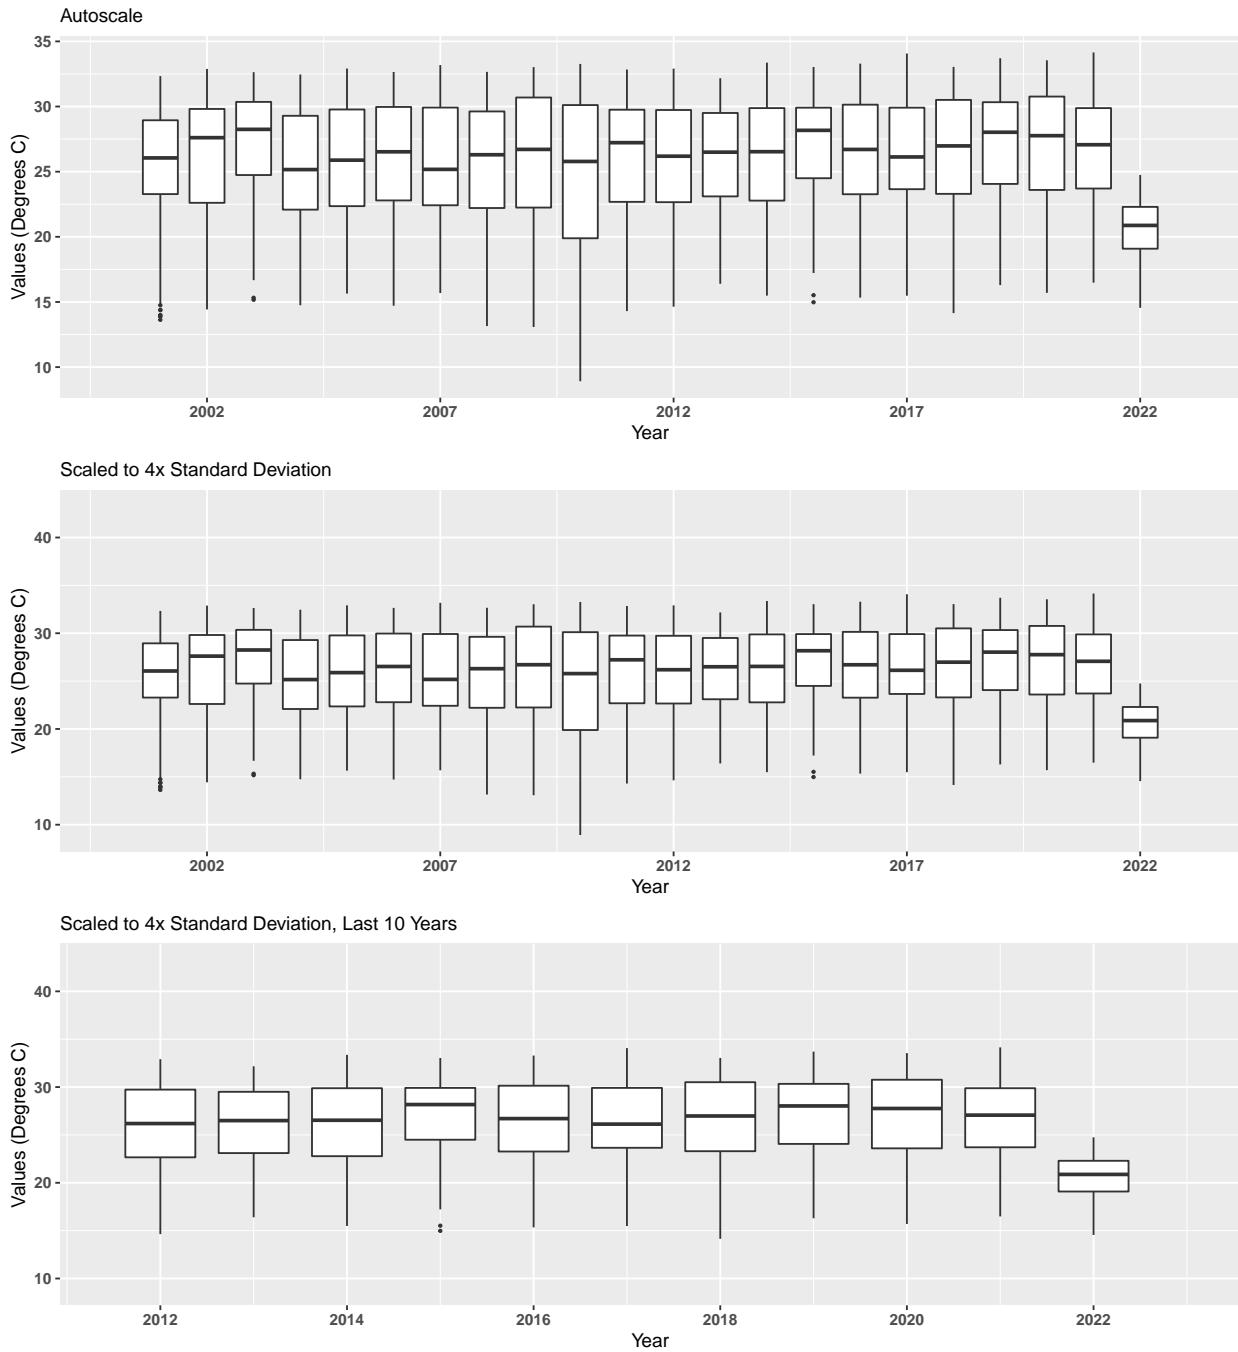


Summary Box Plots for Rookery Bay Aquatic Preserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq
 By Year & Month

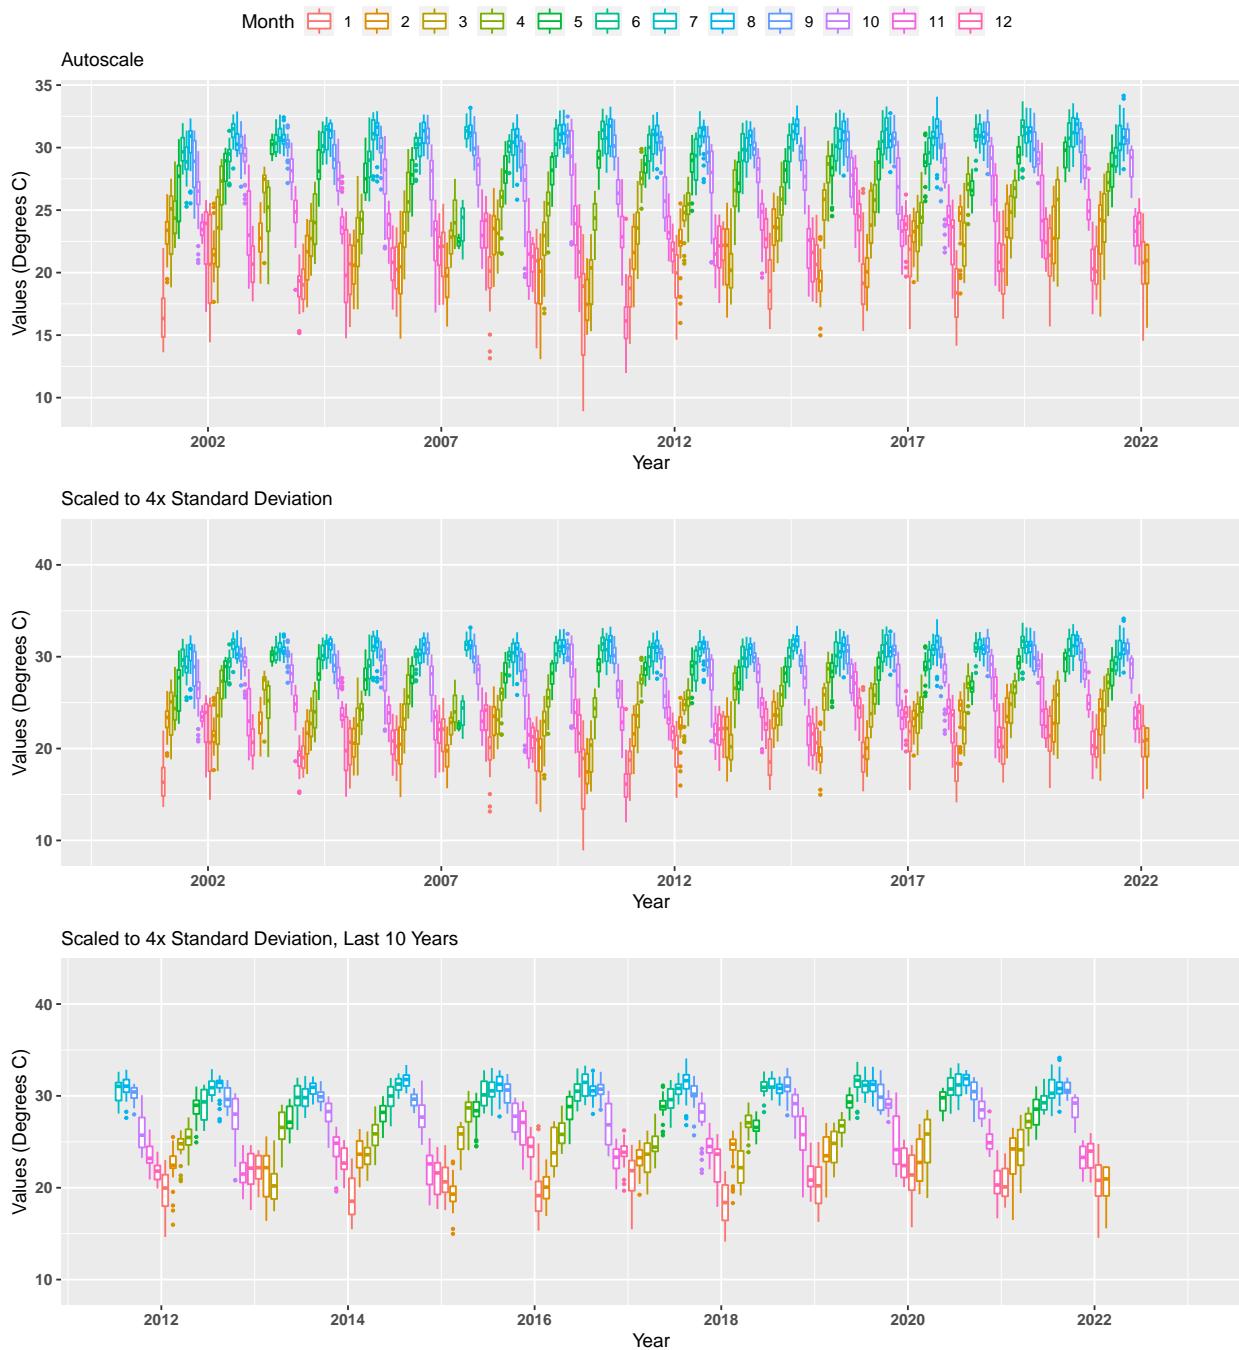

Summary Box Plots for Rookery Bay Aquatic Preserve


354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq

By Month

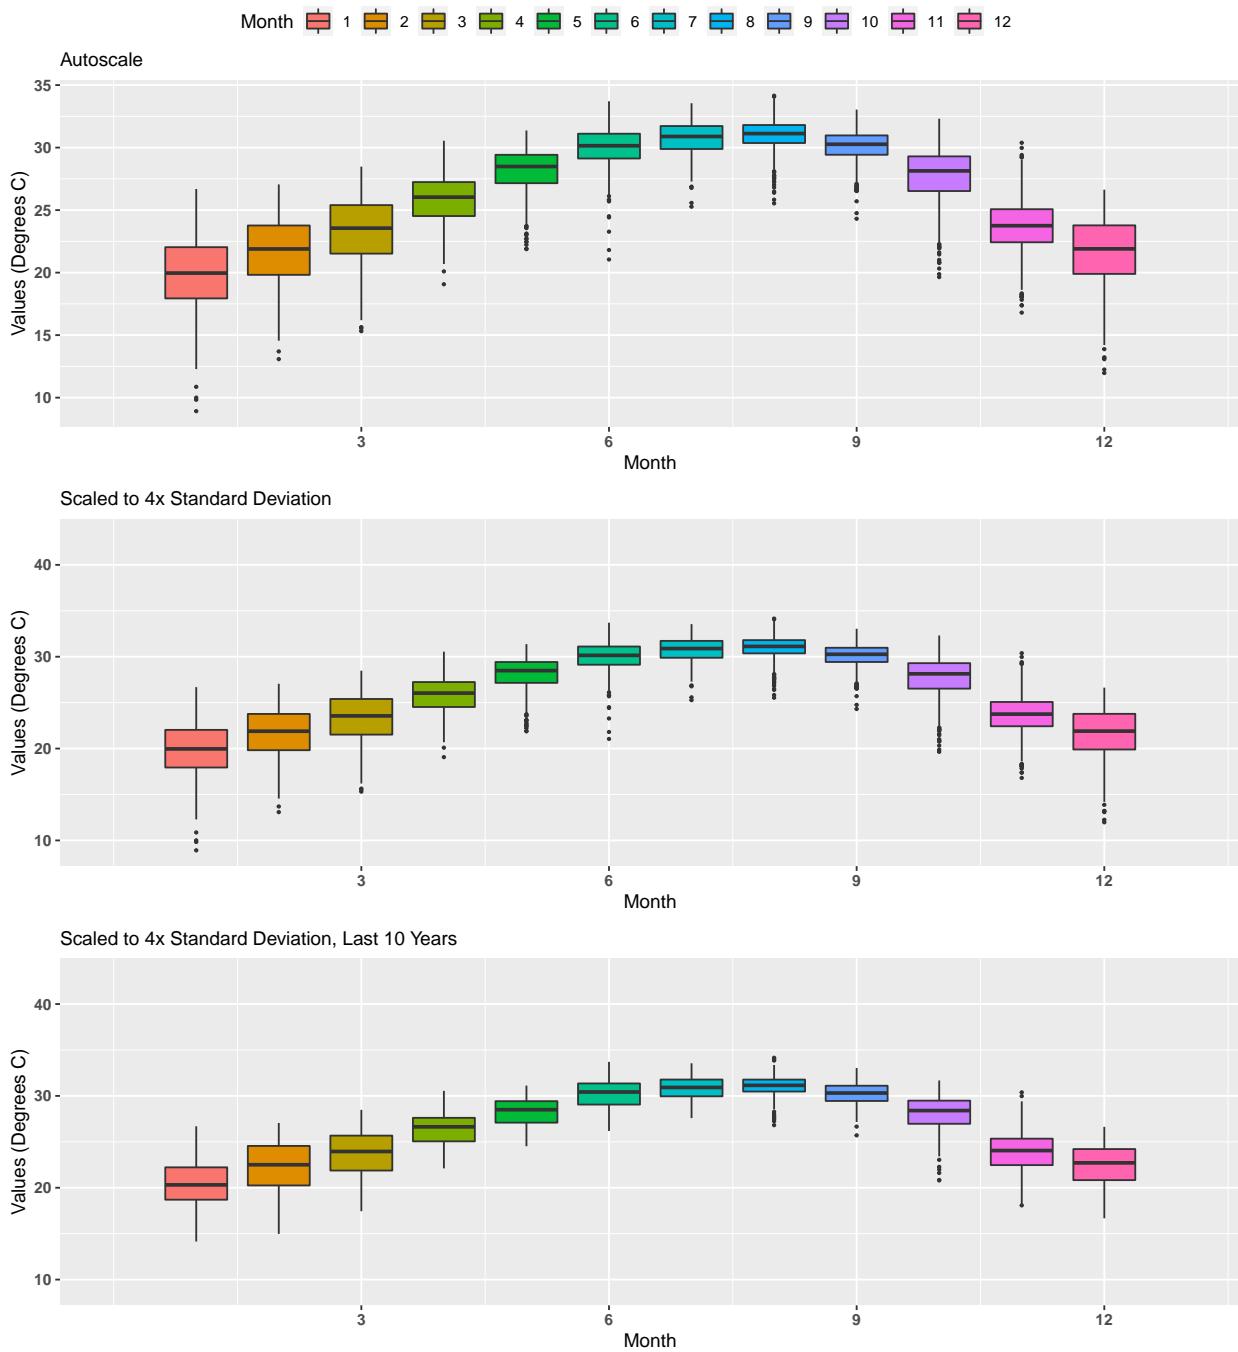


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255123081321300

By Year

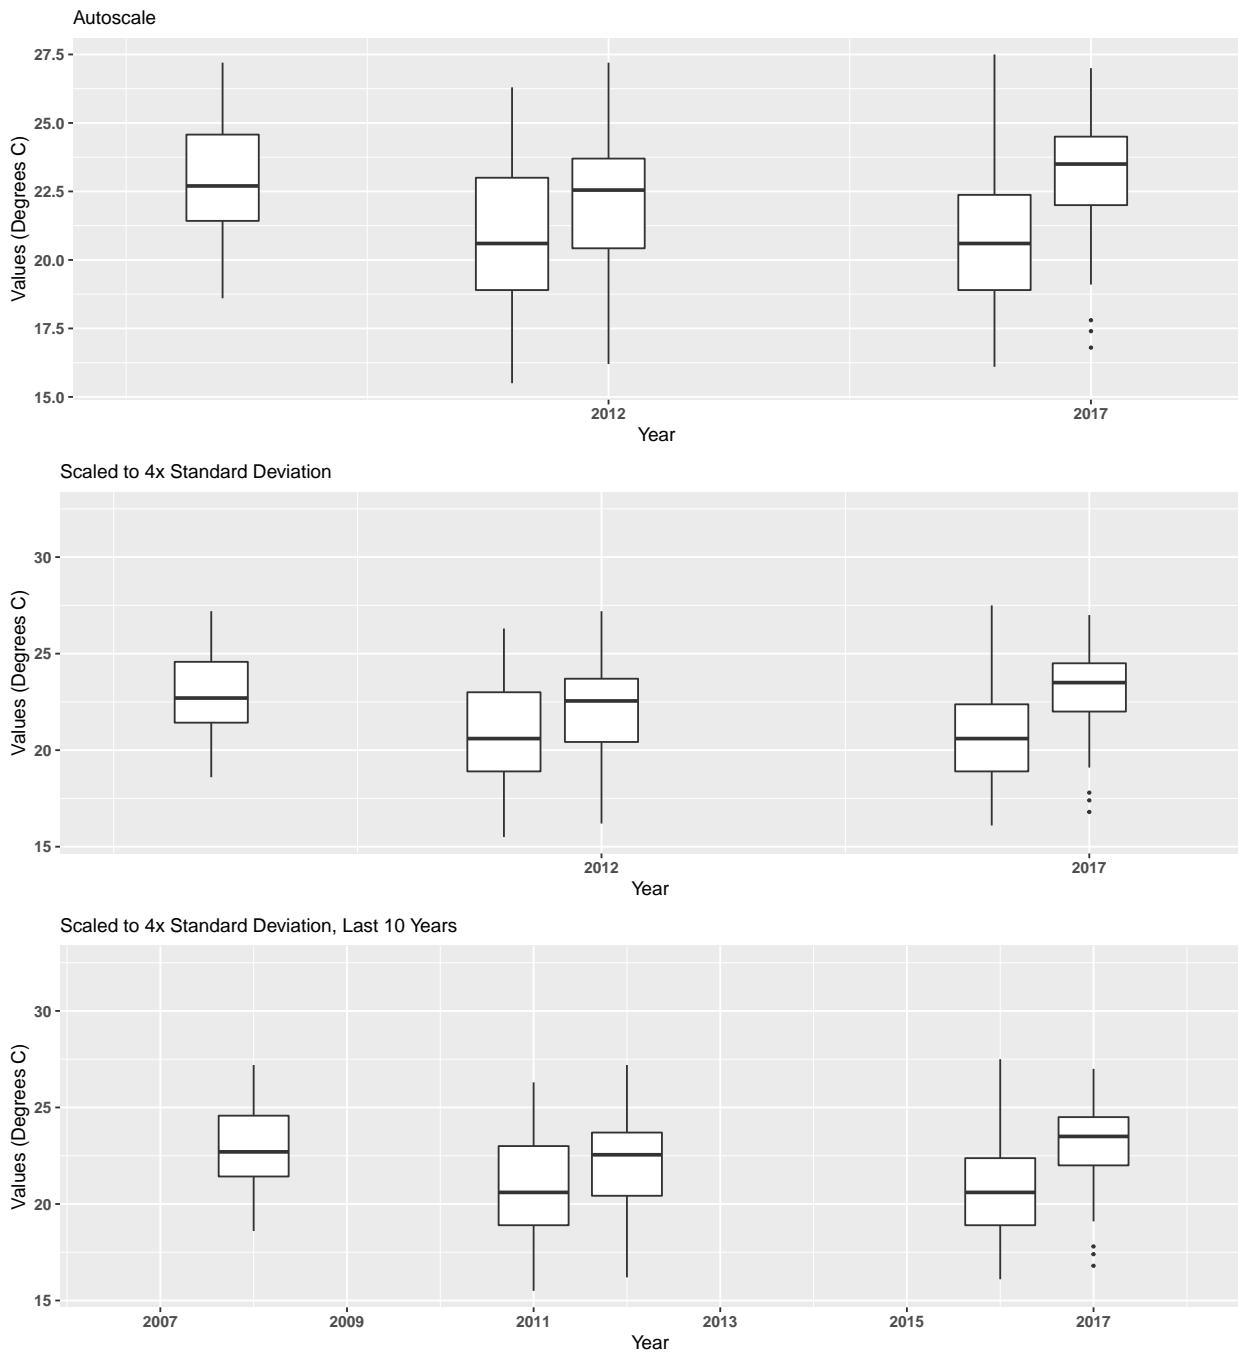


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255123081321300
By Year & Month

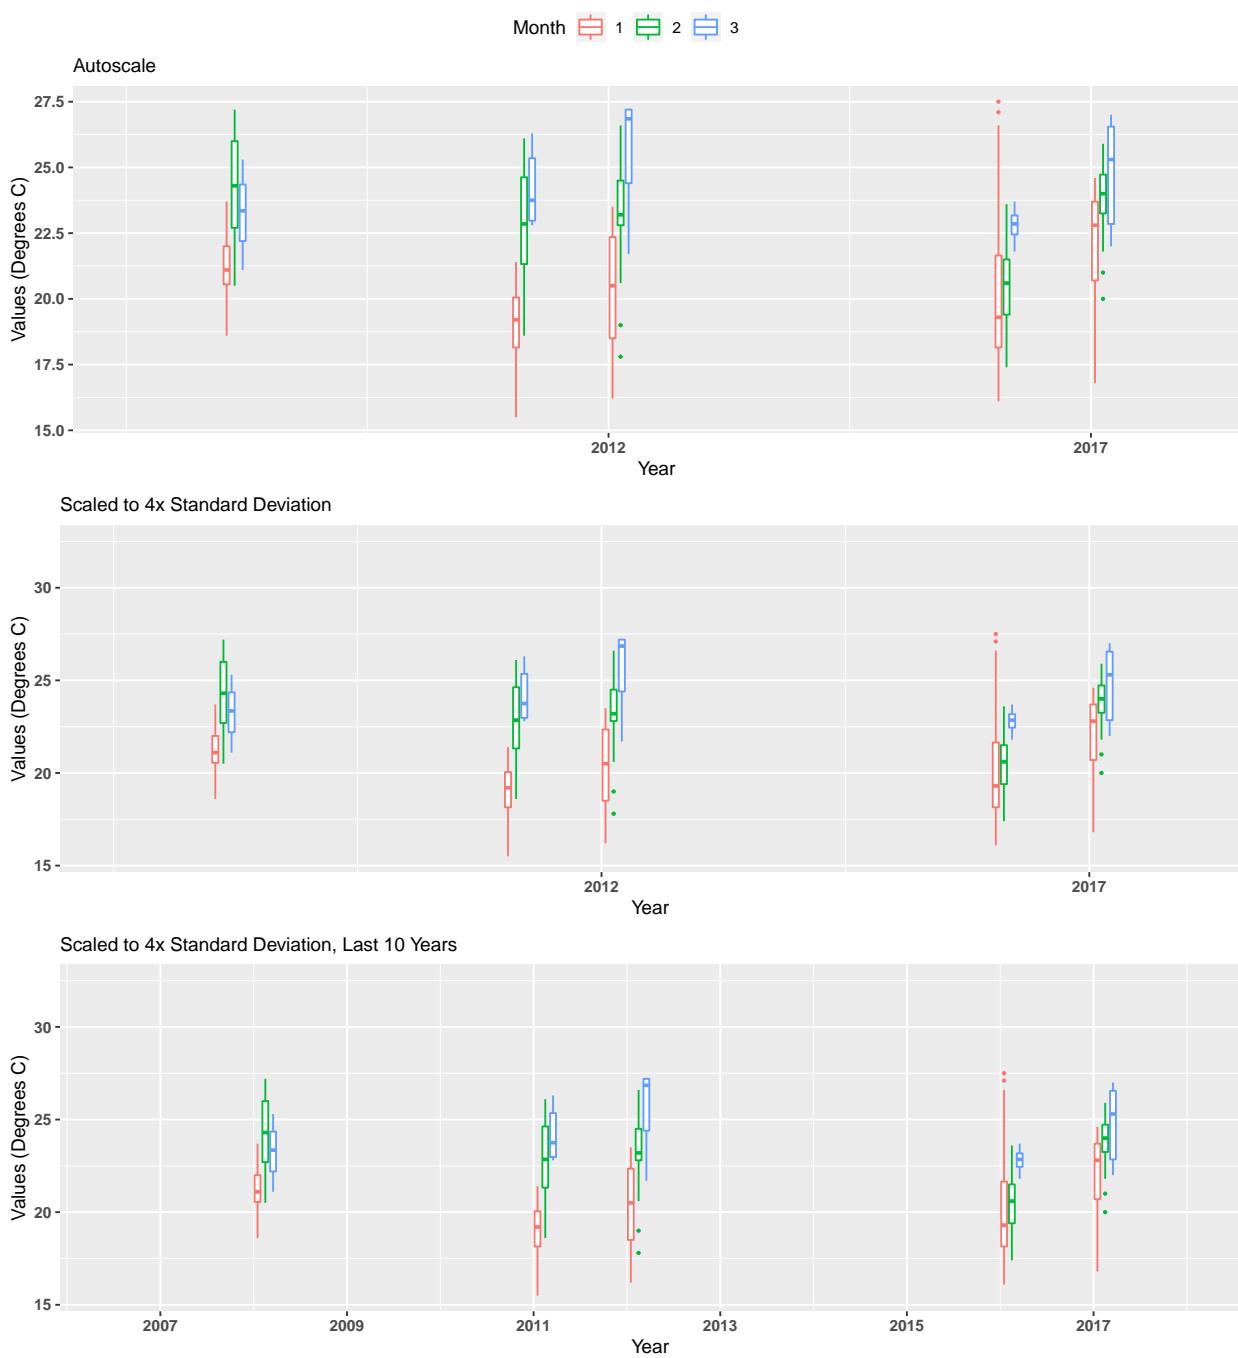

Summary Box Plots for Rookery Bay National Estuarine Research Reserve


7 | National Water Information System | 255123081321300

By Month

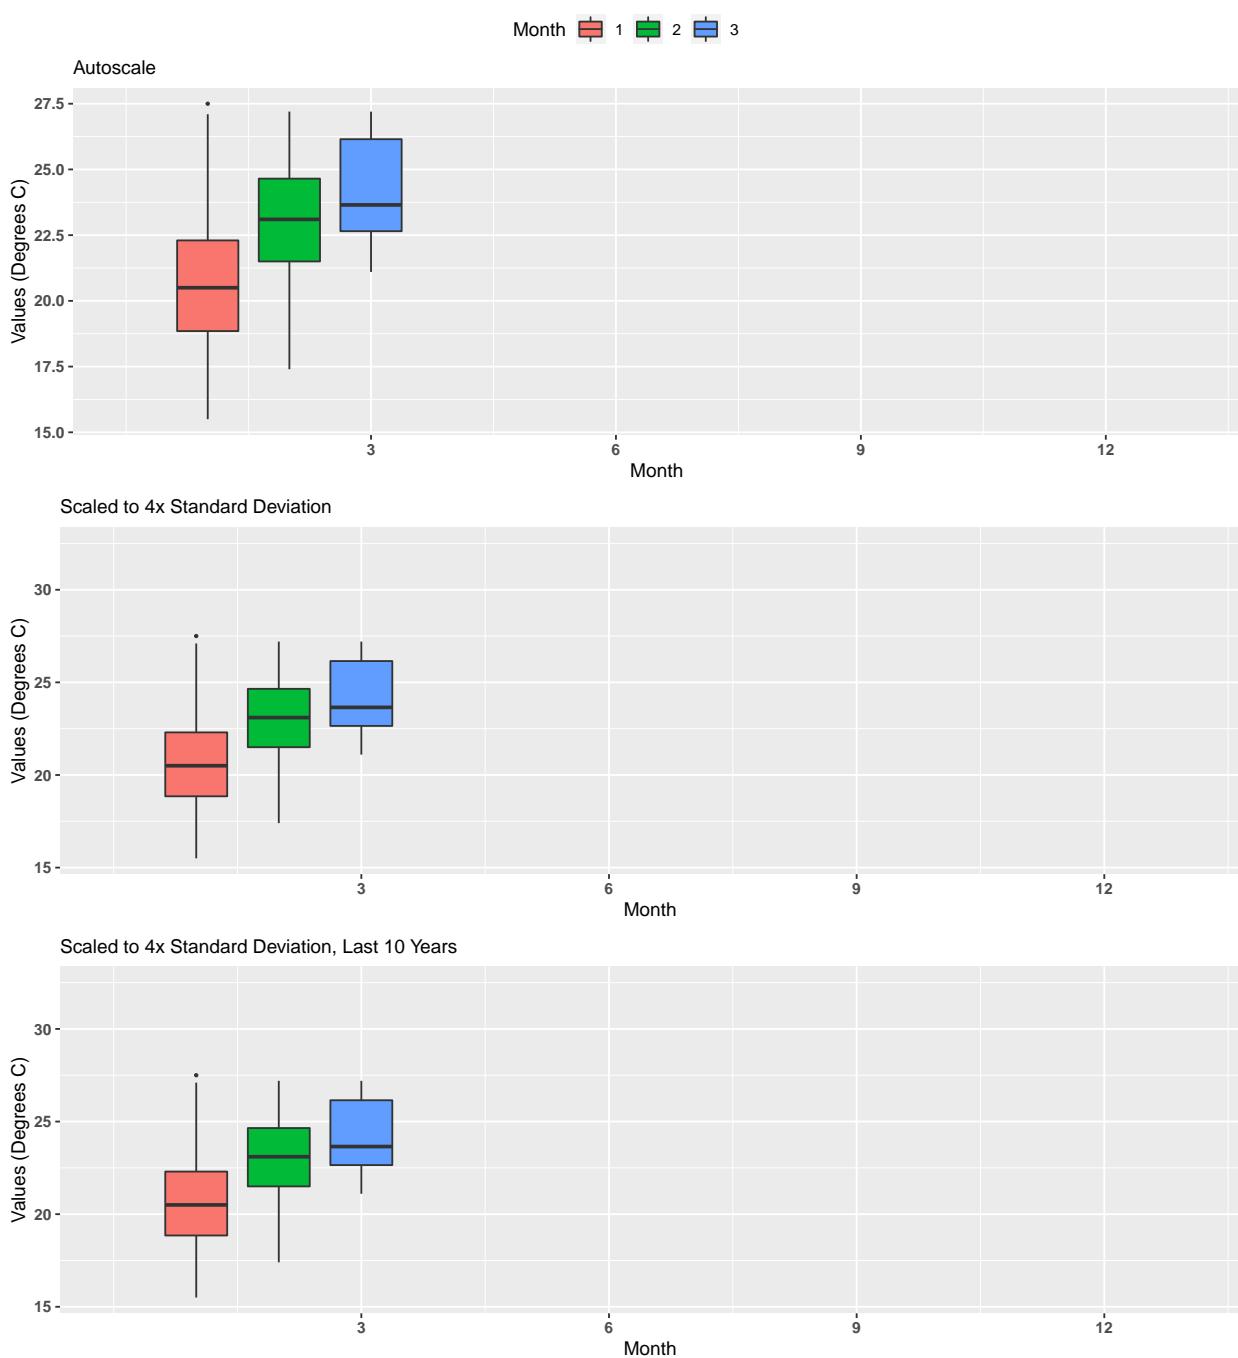


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255432081303900


By Year

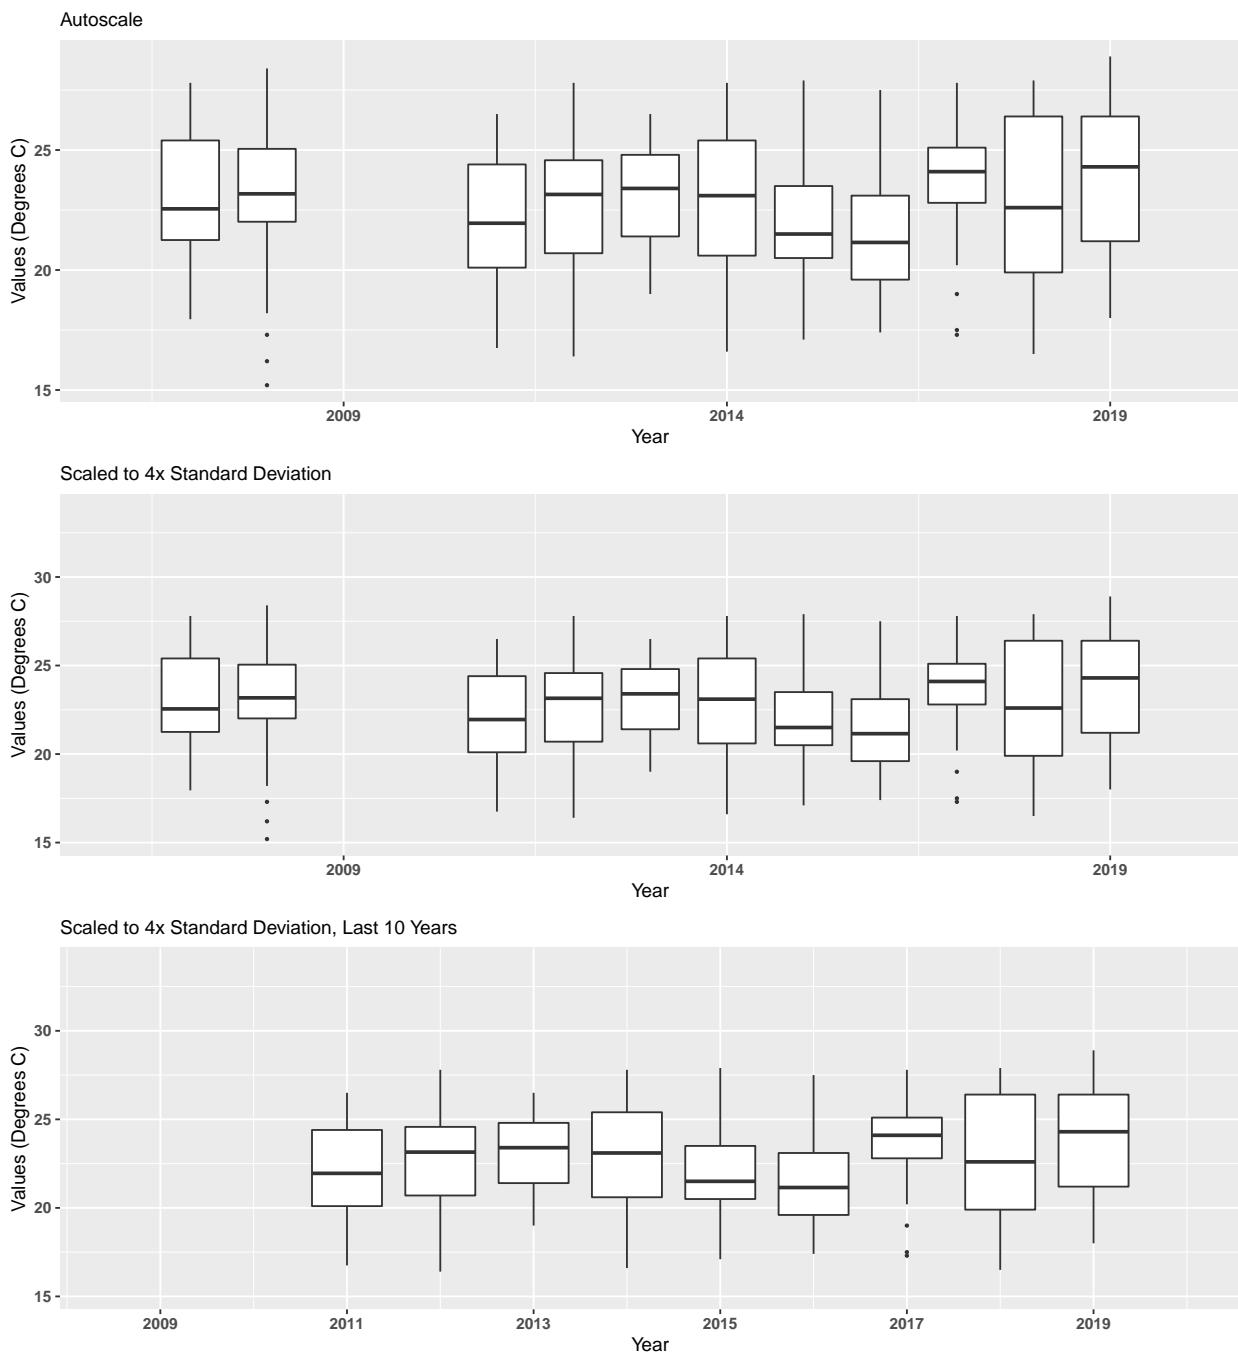

Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255432081303900
By Year & Month

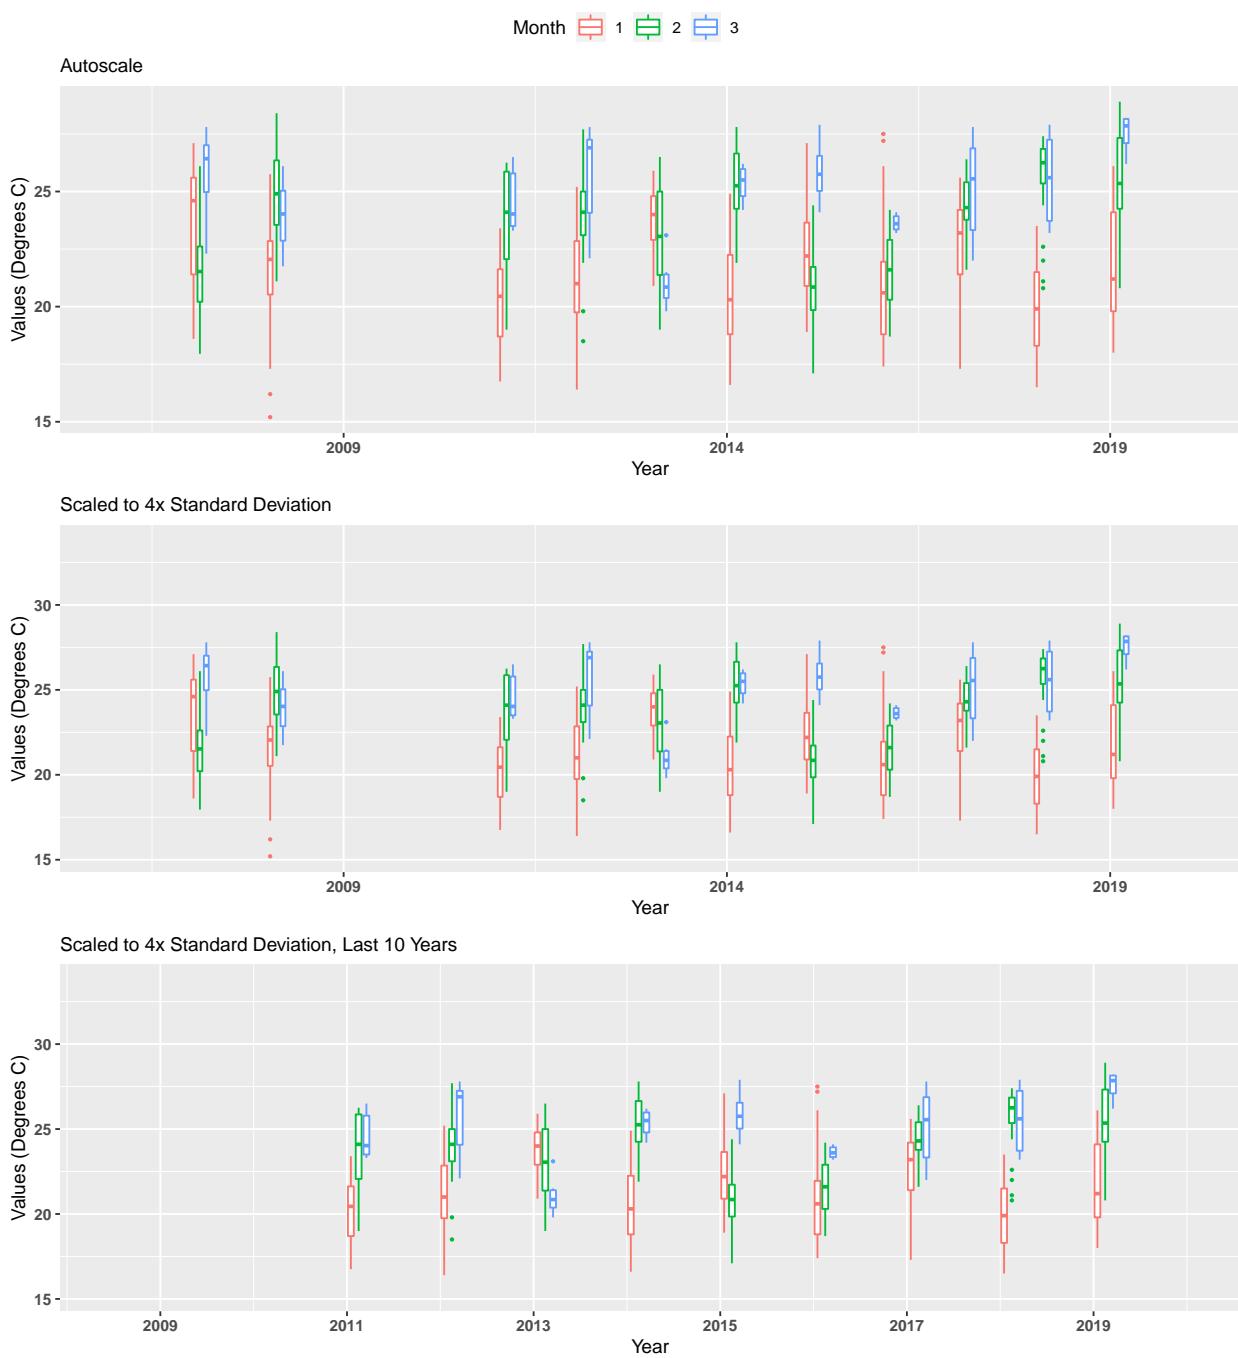


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255432081303900
By Month

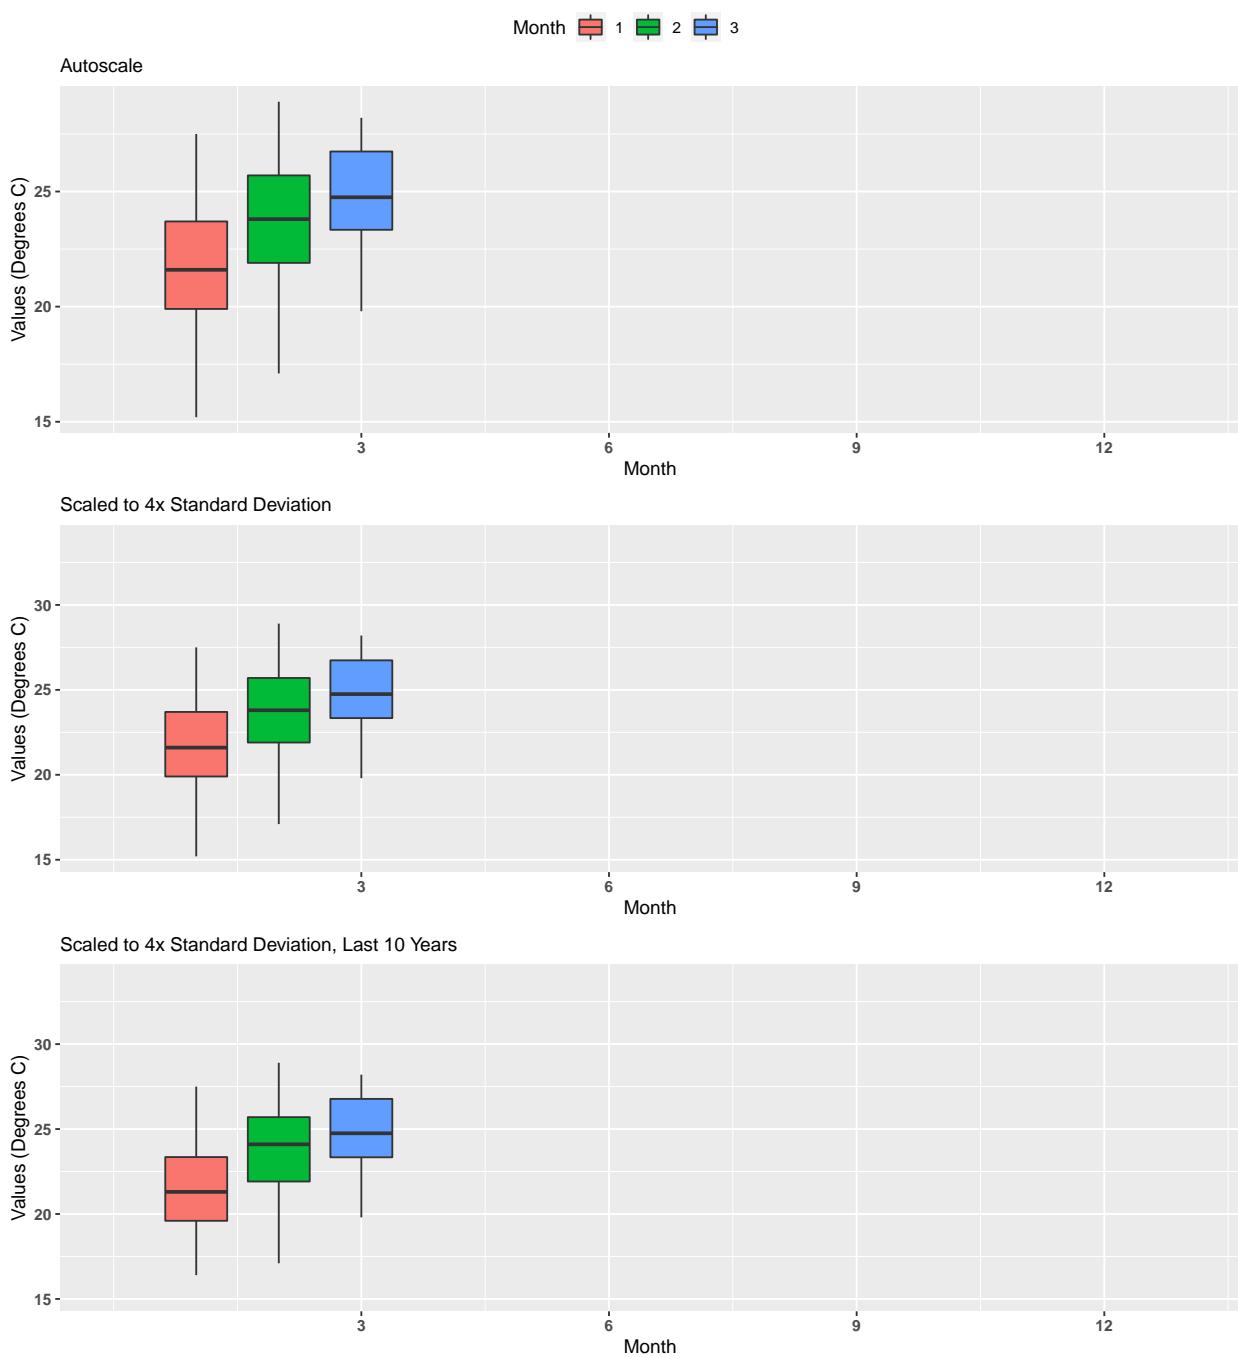


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255534081324000

By Year

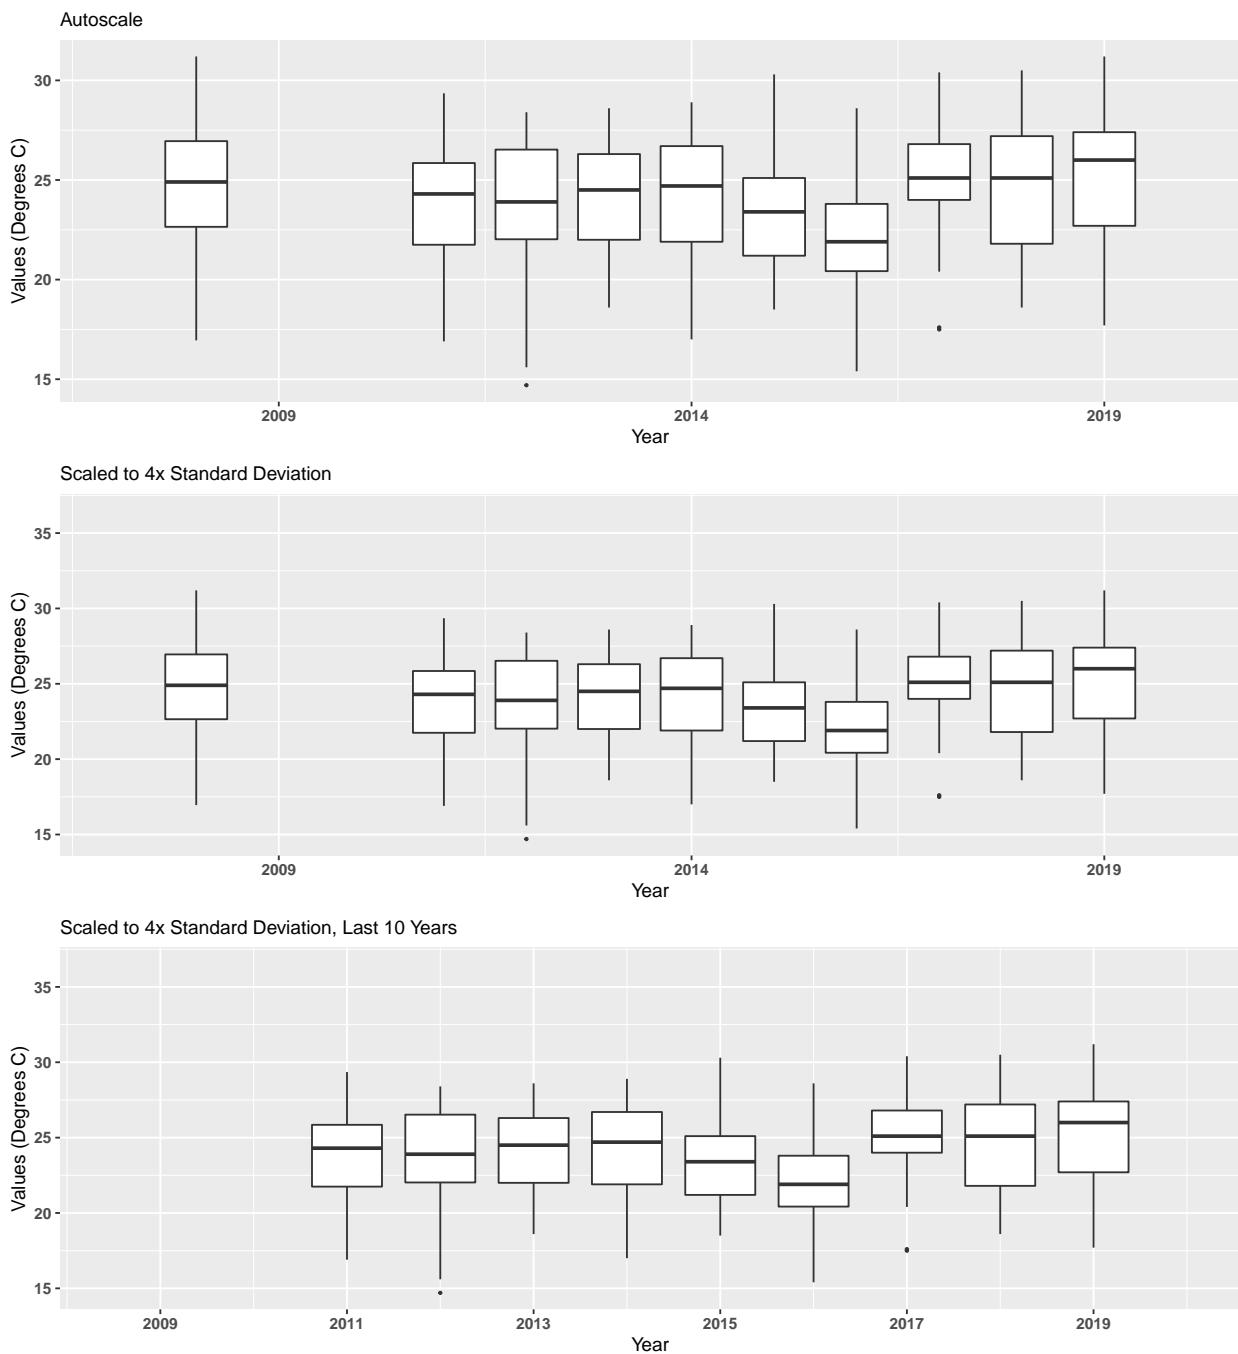


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255534081324000
By Year & Month

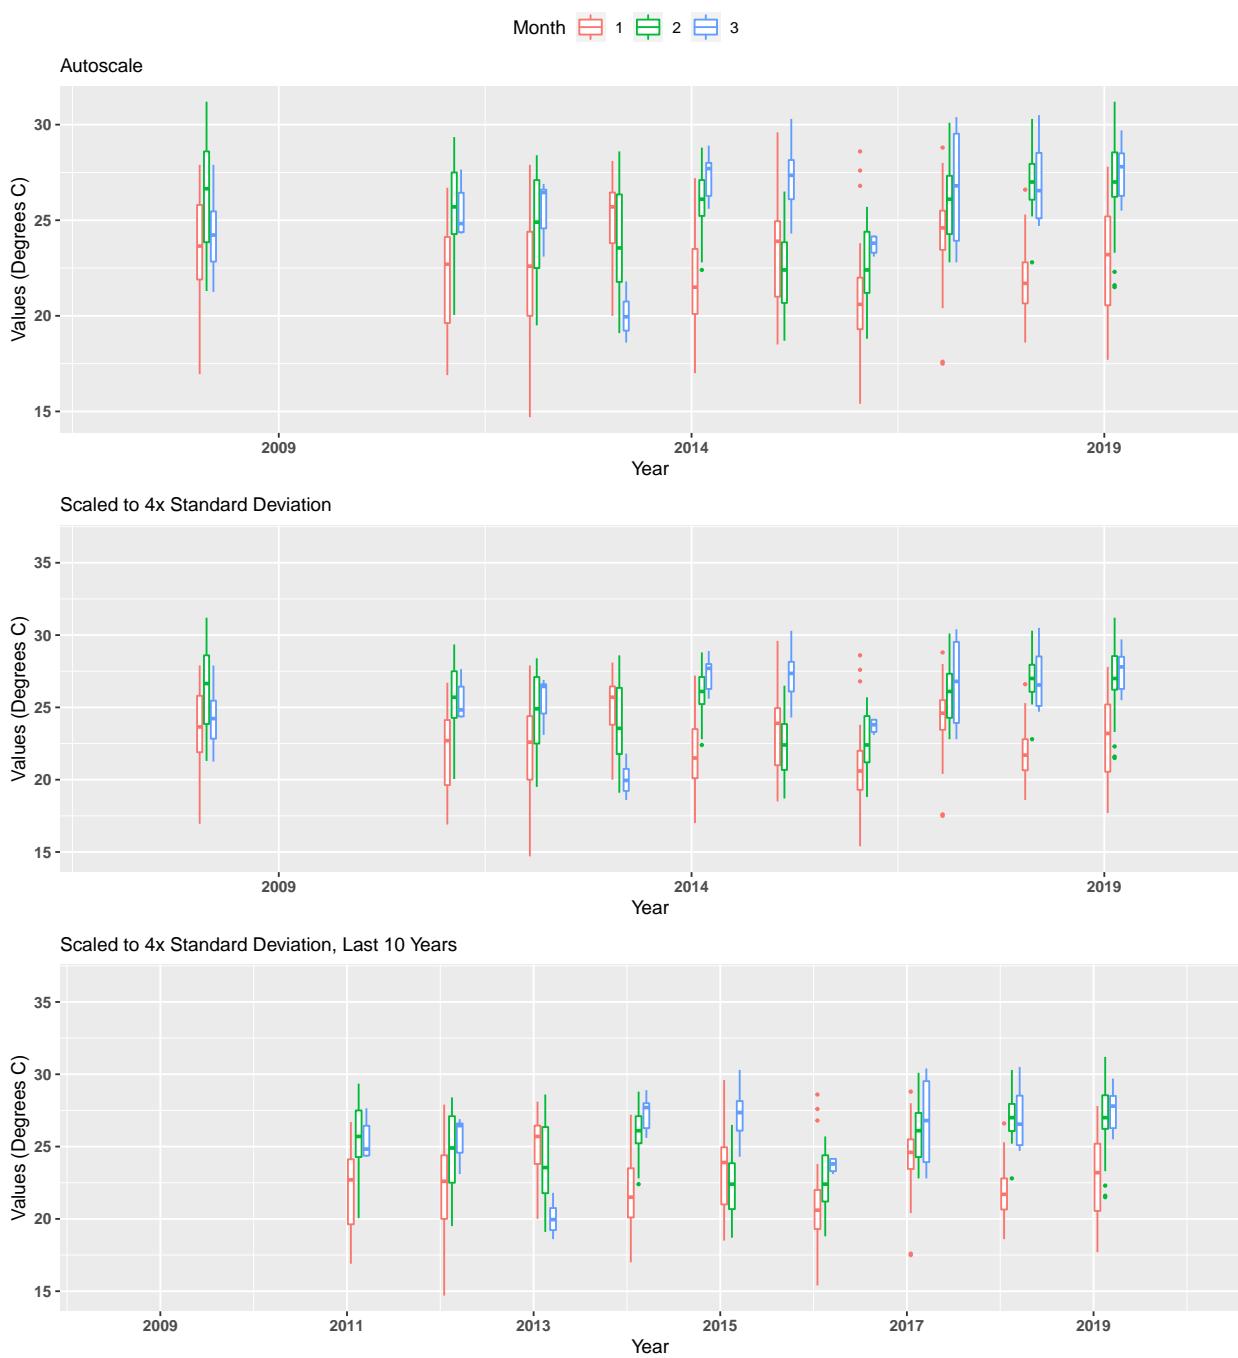

Summary Box Plots for Rookery Bay National Estuarine Research Reserve


7 | National Water Information System | 255534081324000

By Month

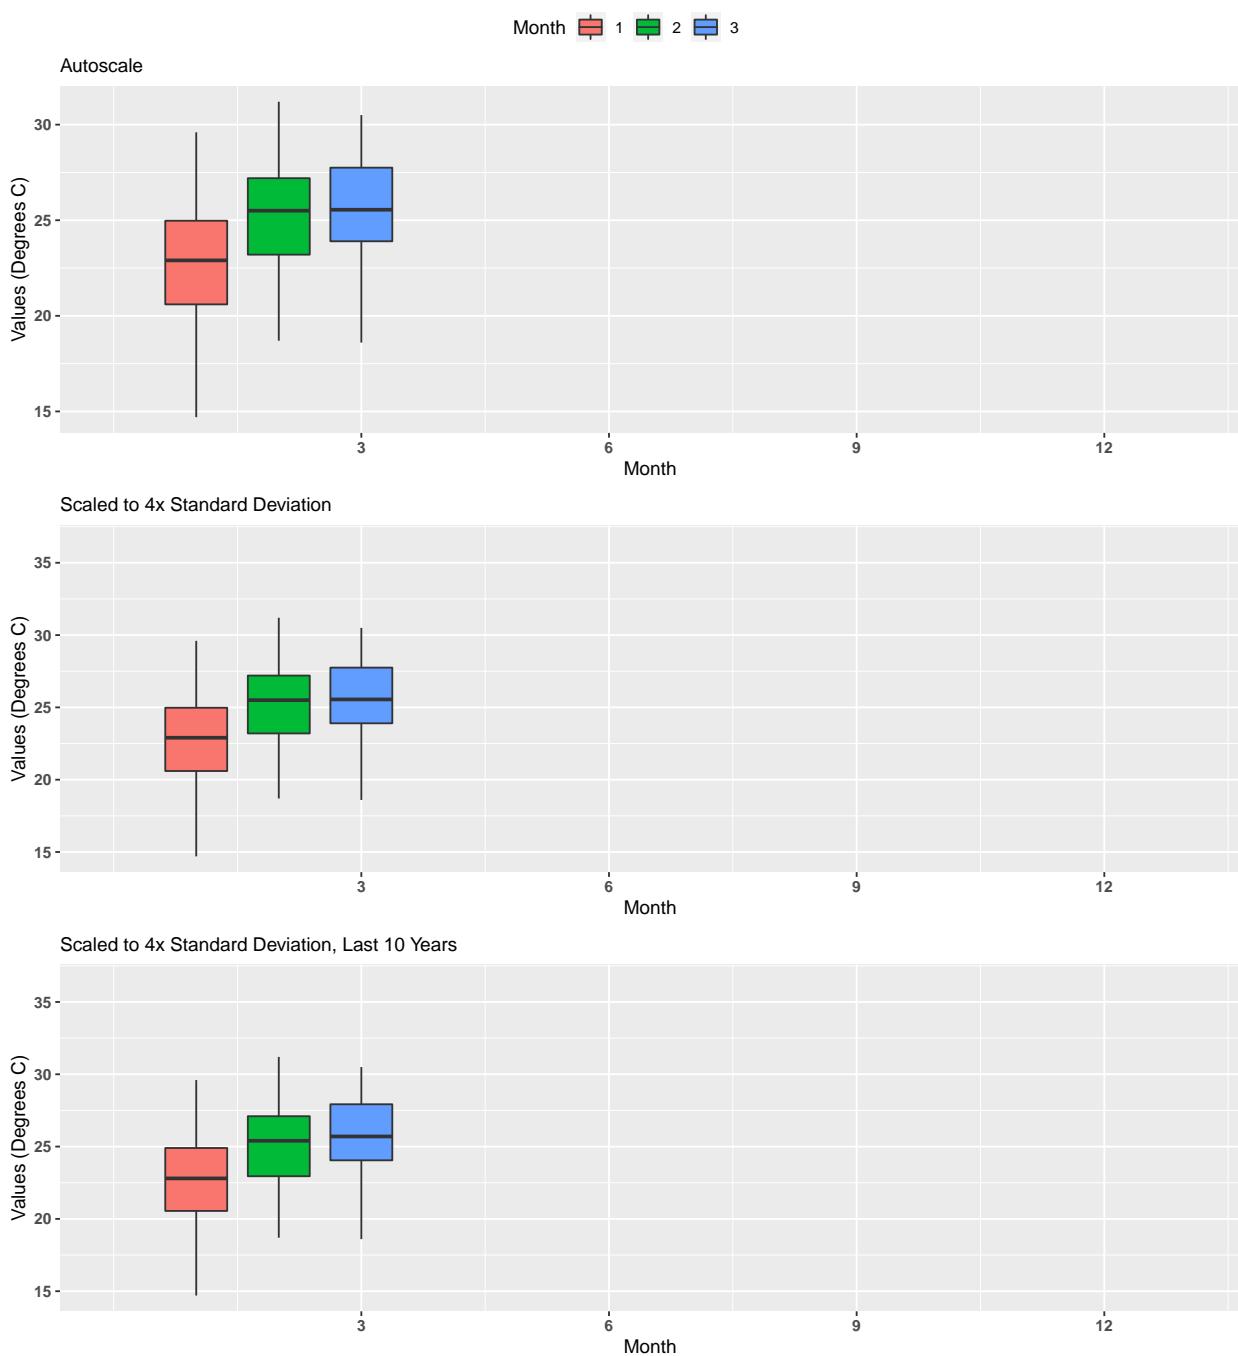


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255654081350200


By Year

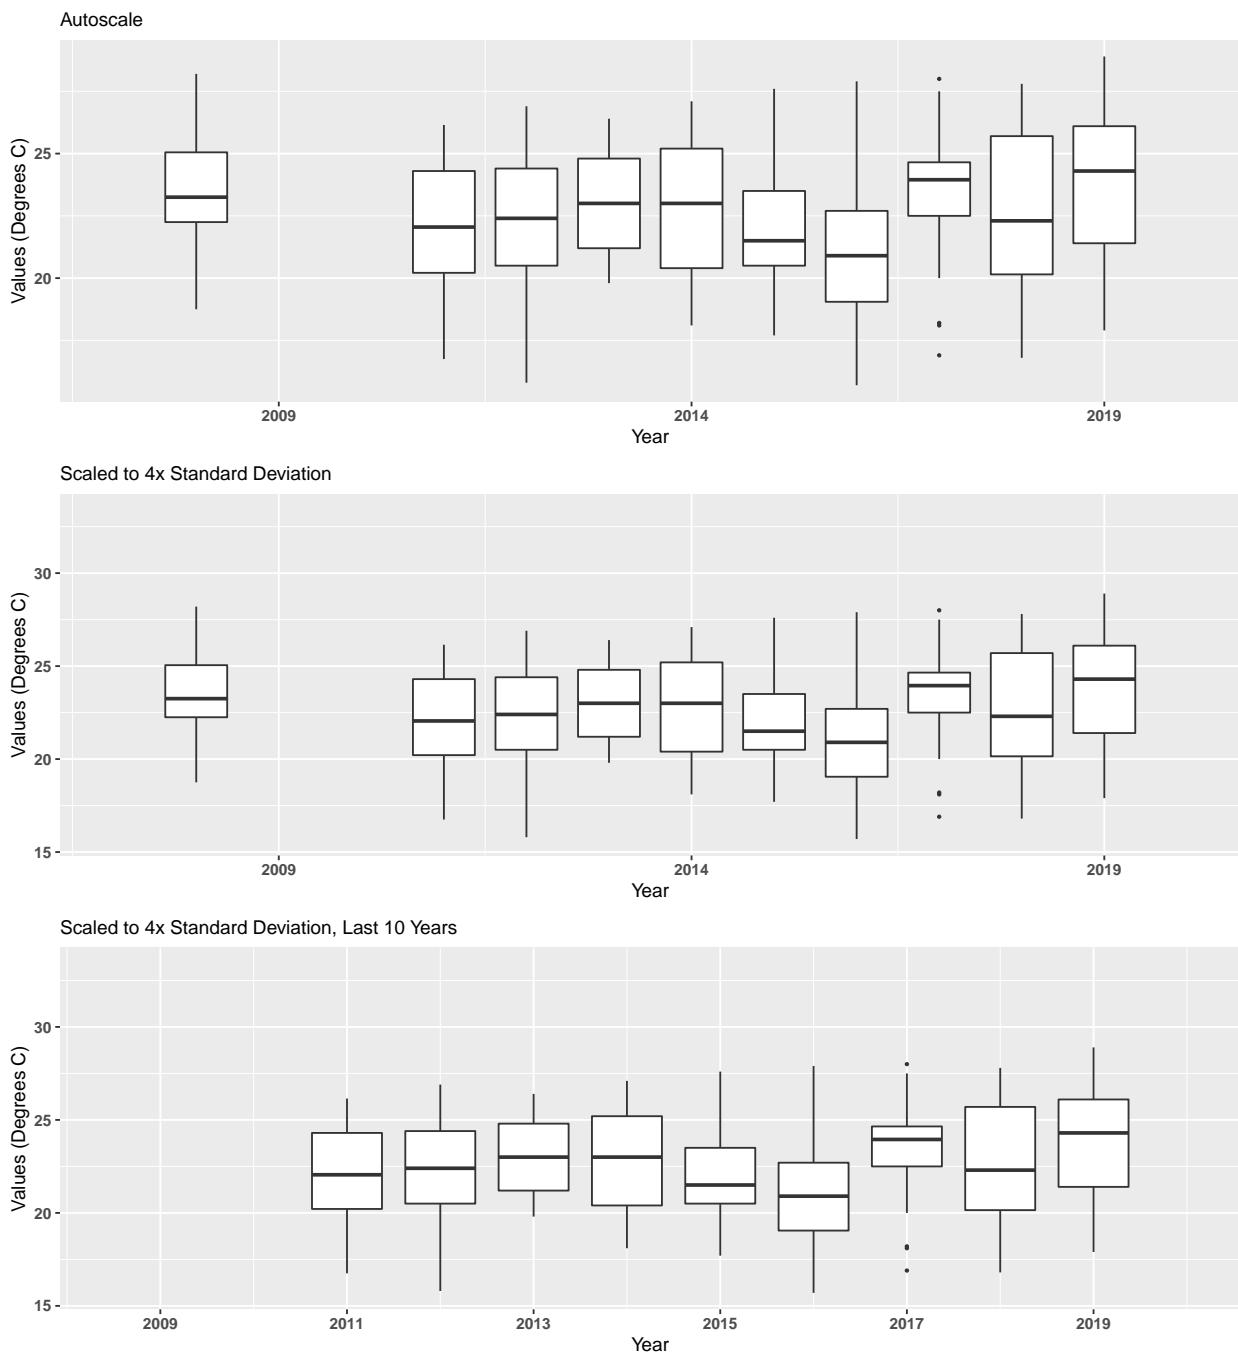


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255654081350200
By Year & Month

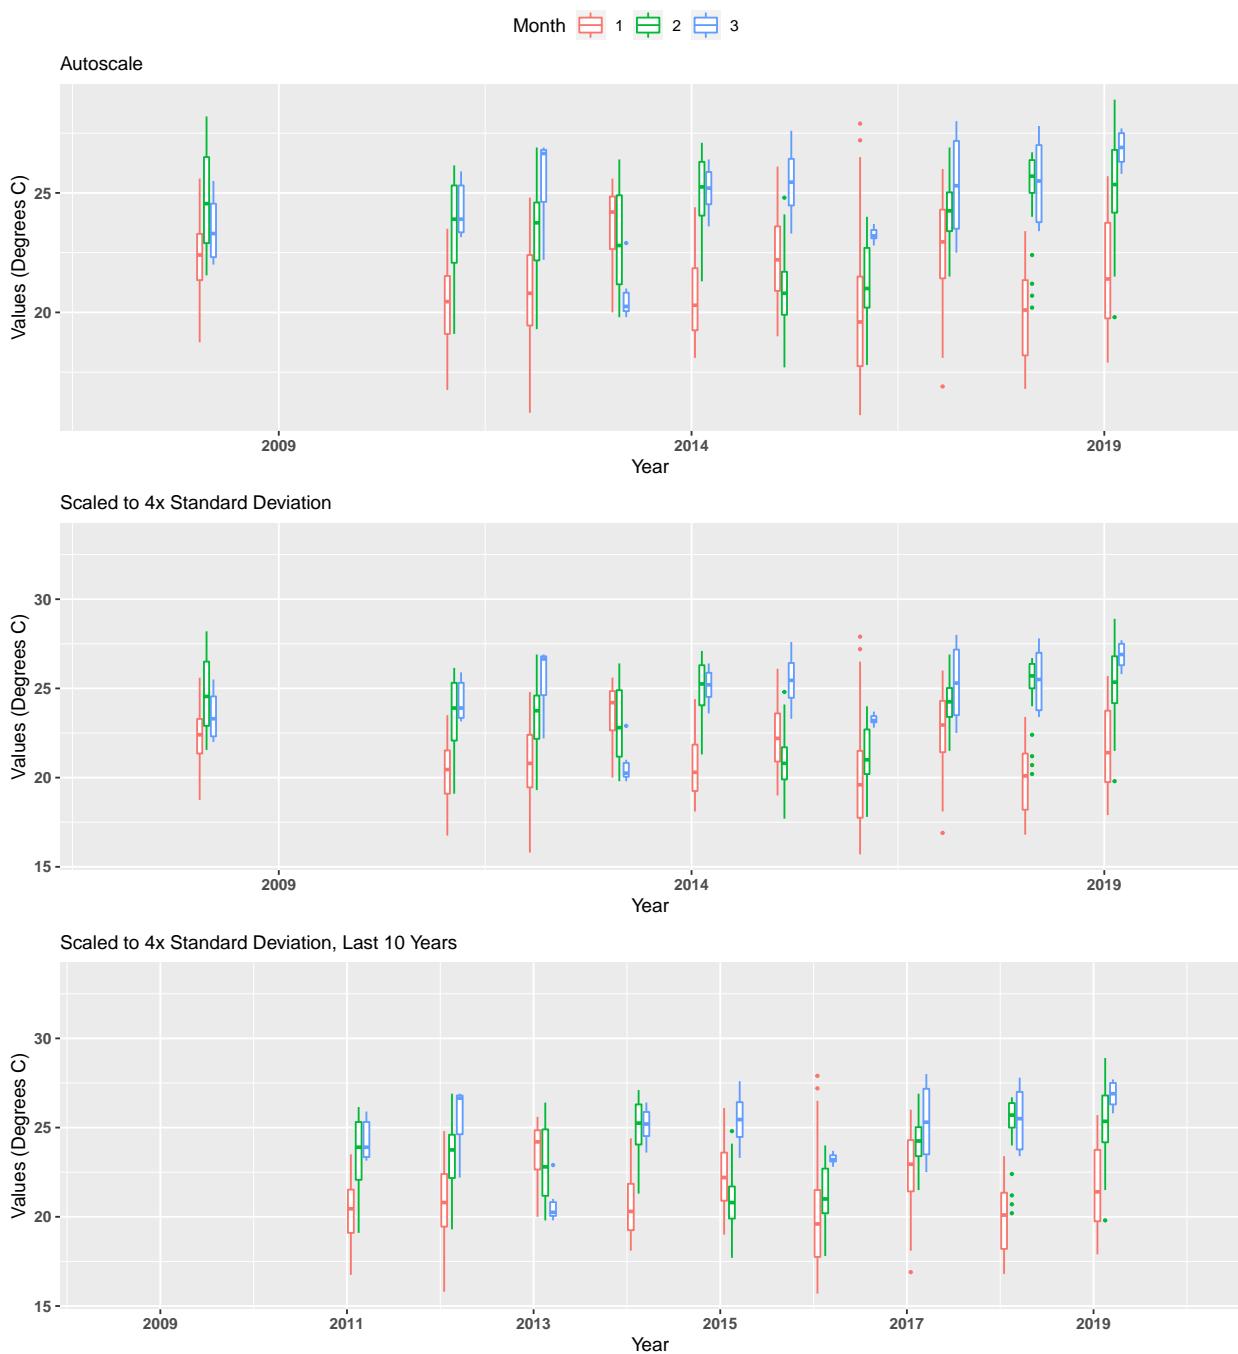


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
7 | National Water Information System | 255654081350200
By Month

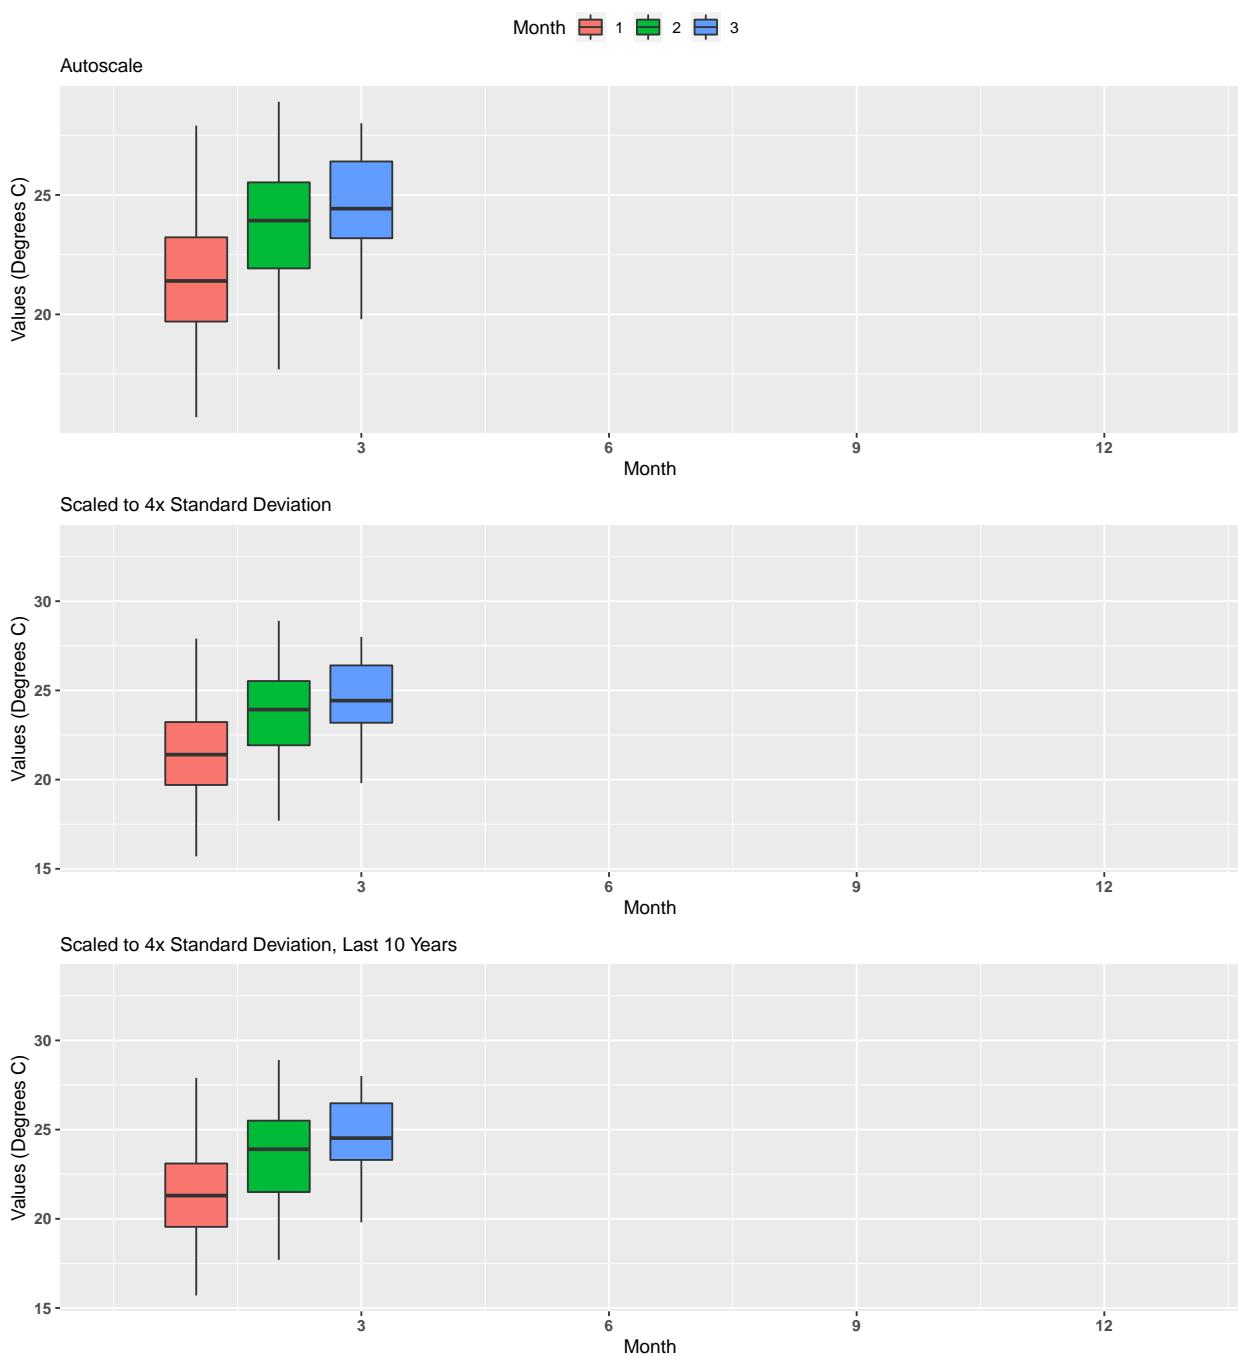


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfbwq
By Year

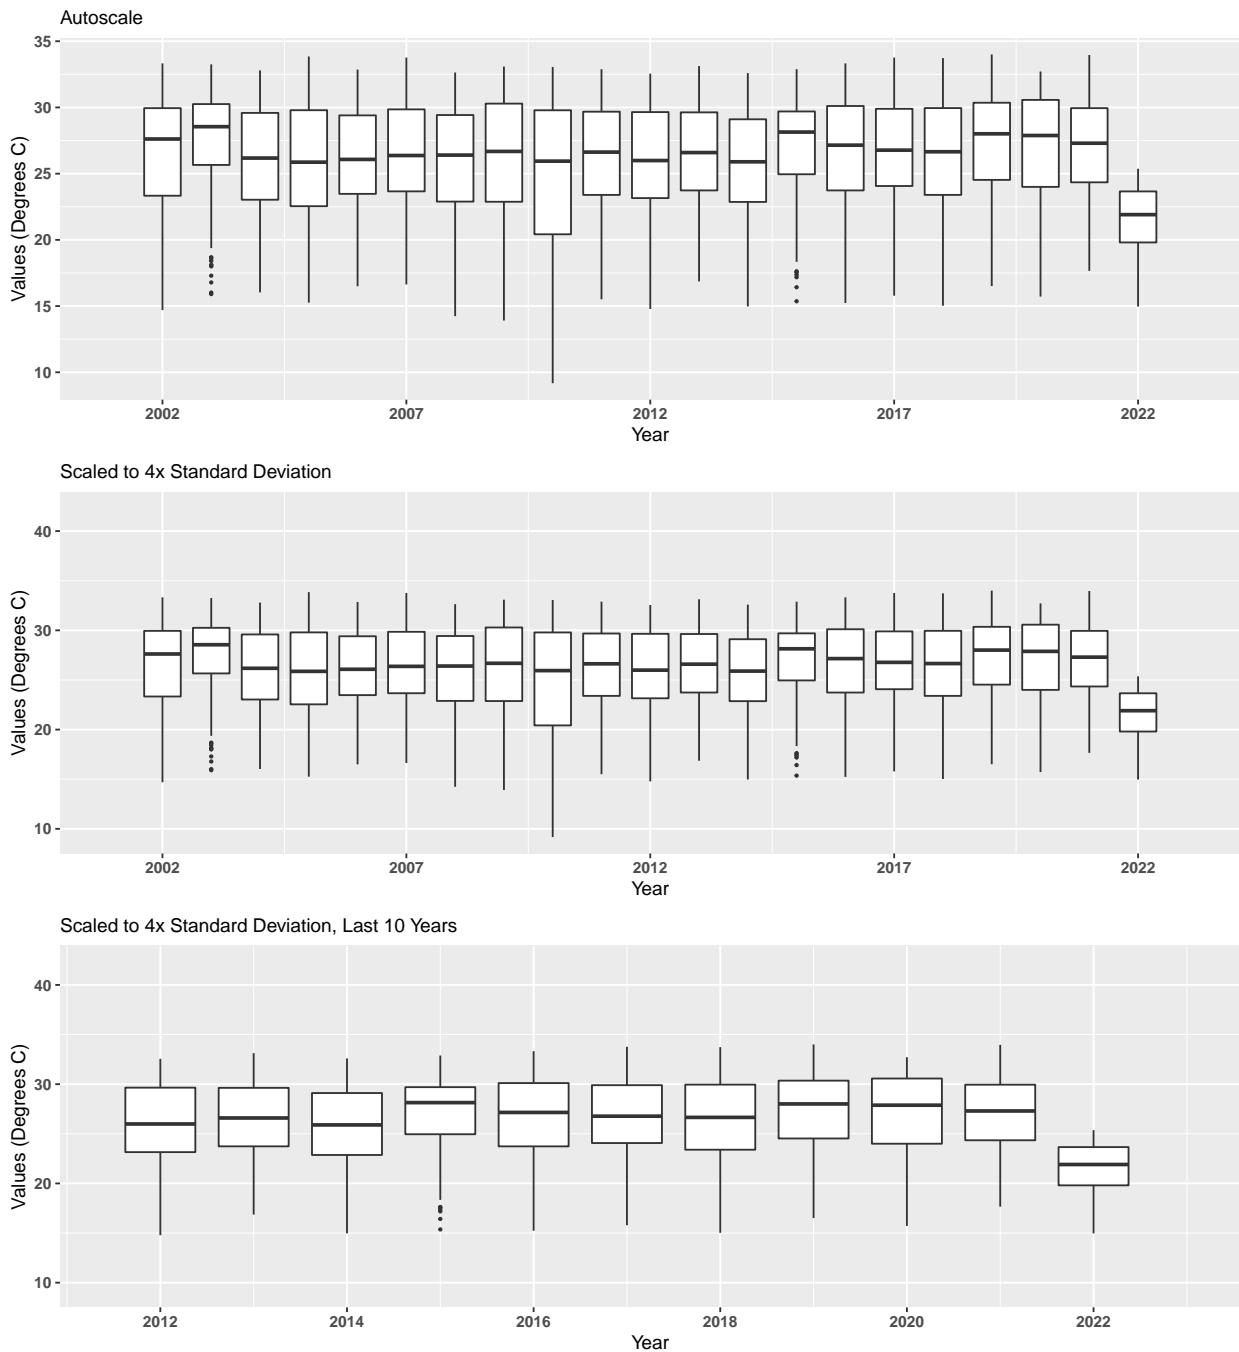


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfbwq
 By Year & Month

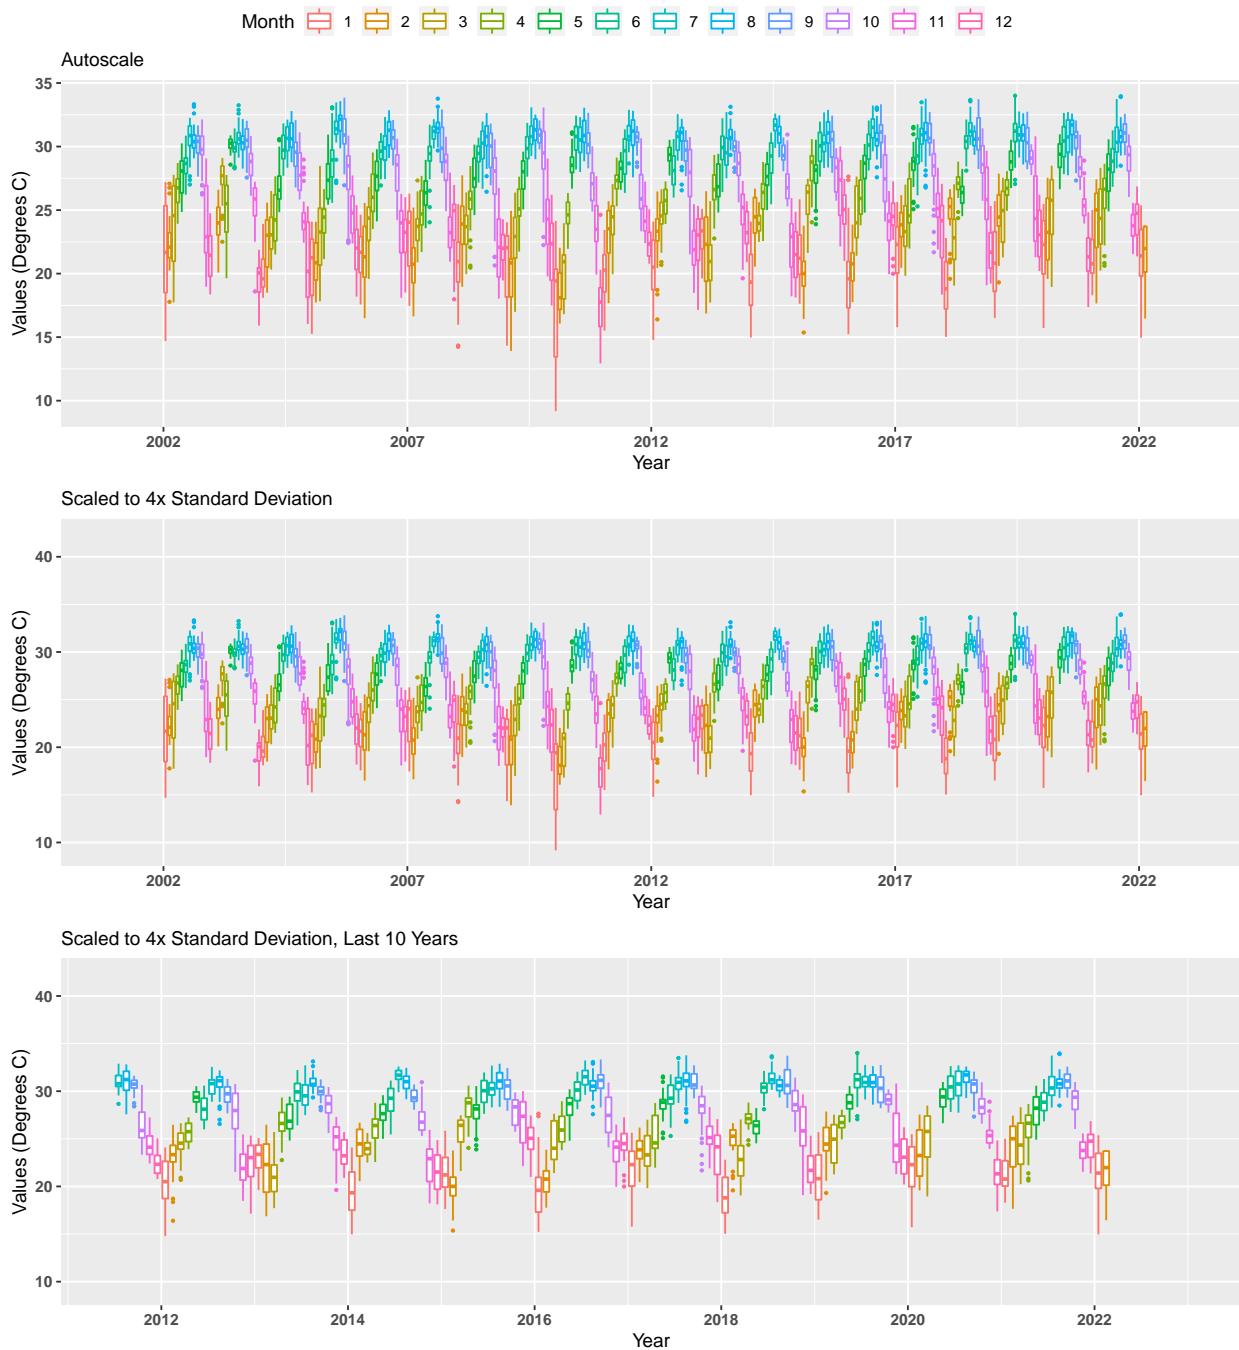


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfbwq
 By Month

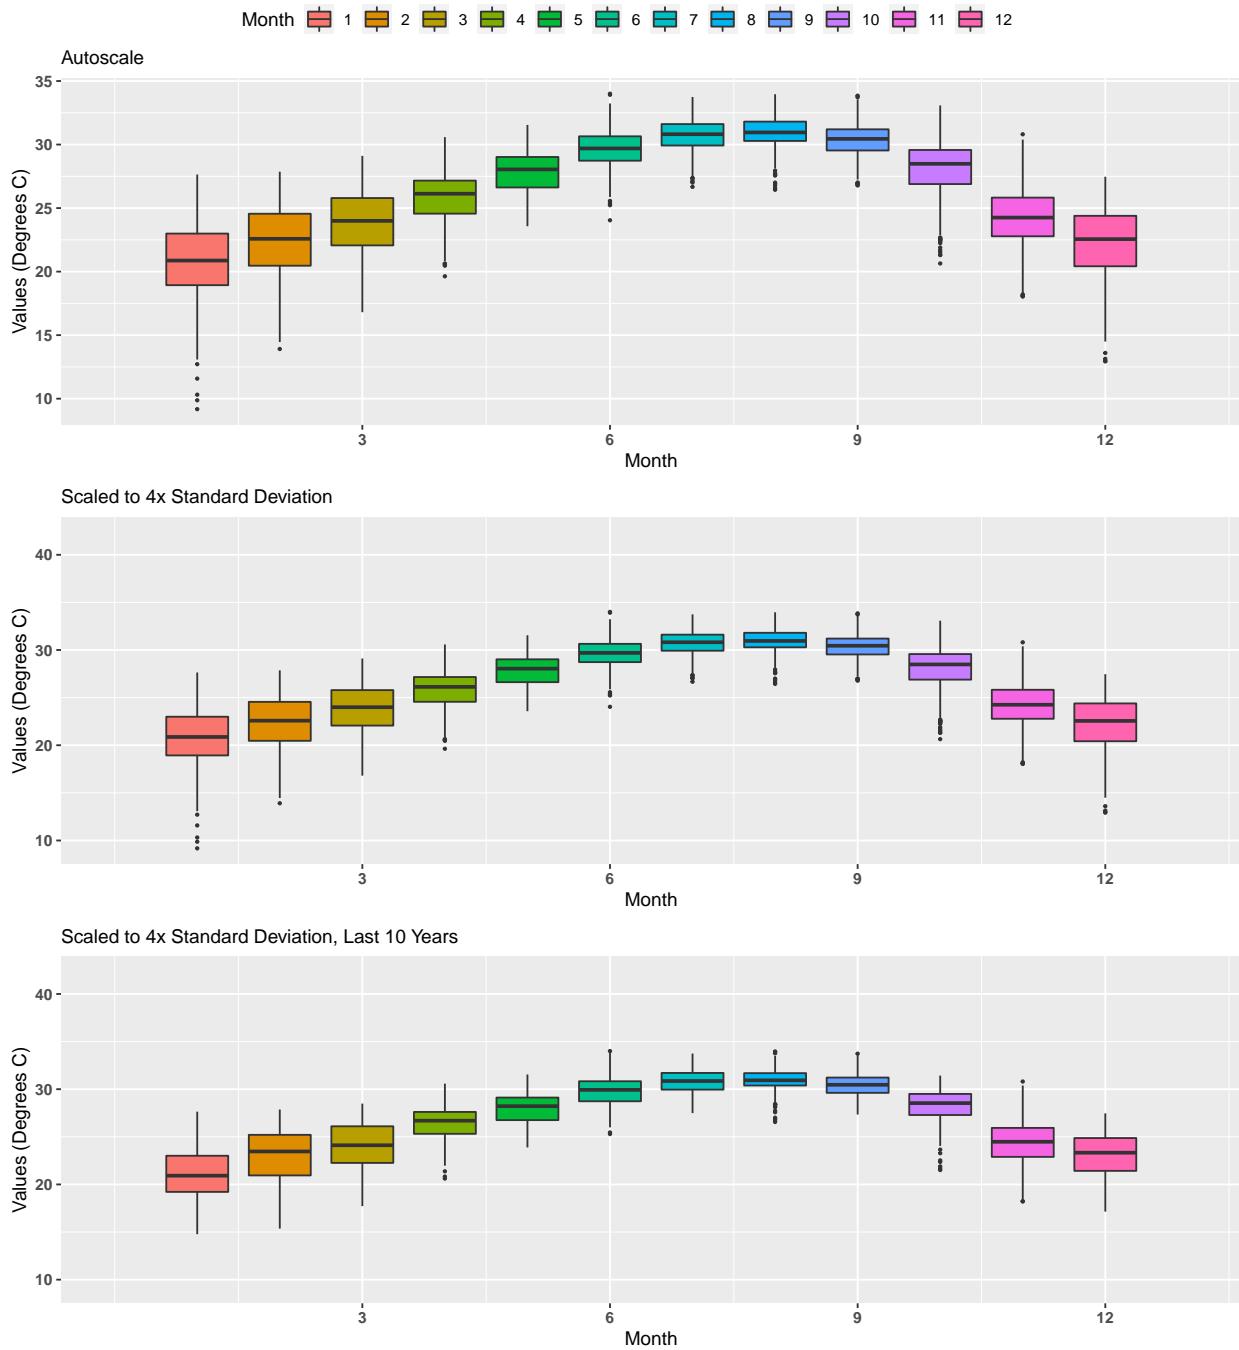


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfuwq
 By Year

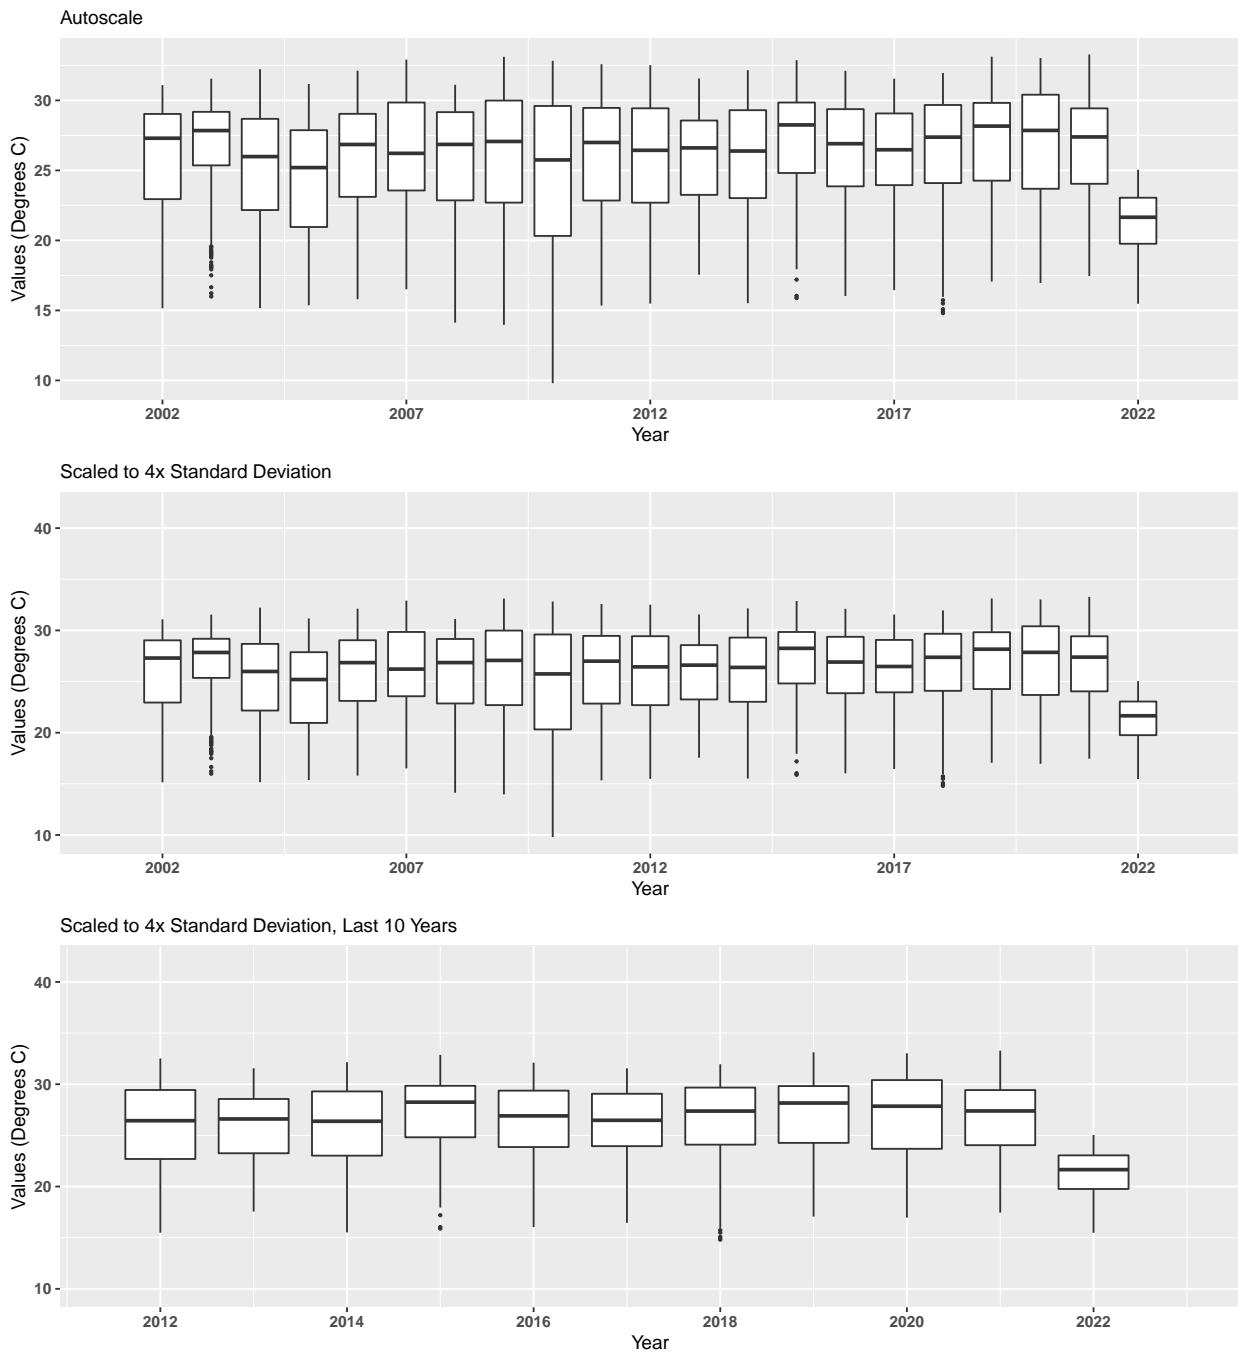


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfuwq
 By Year & Month

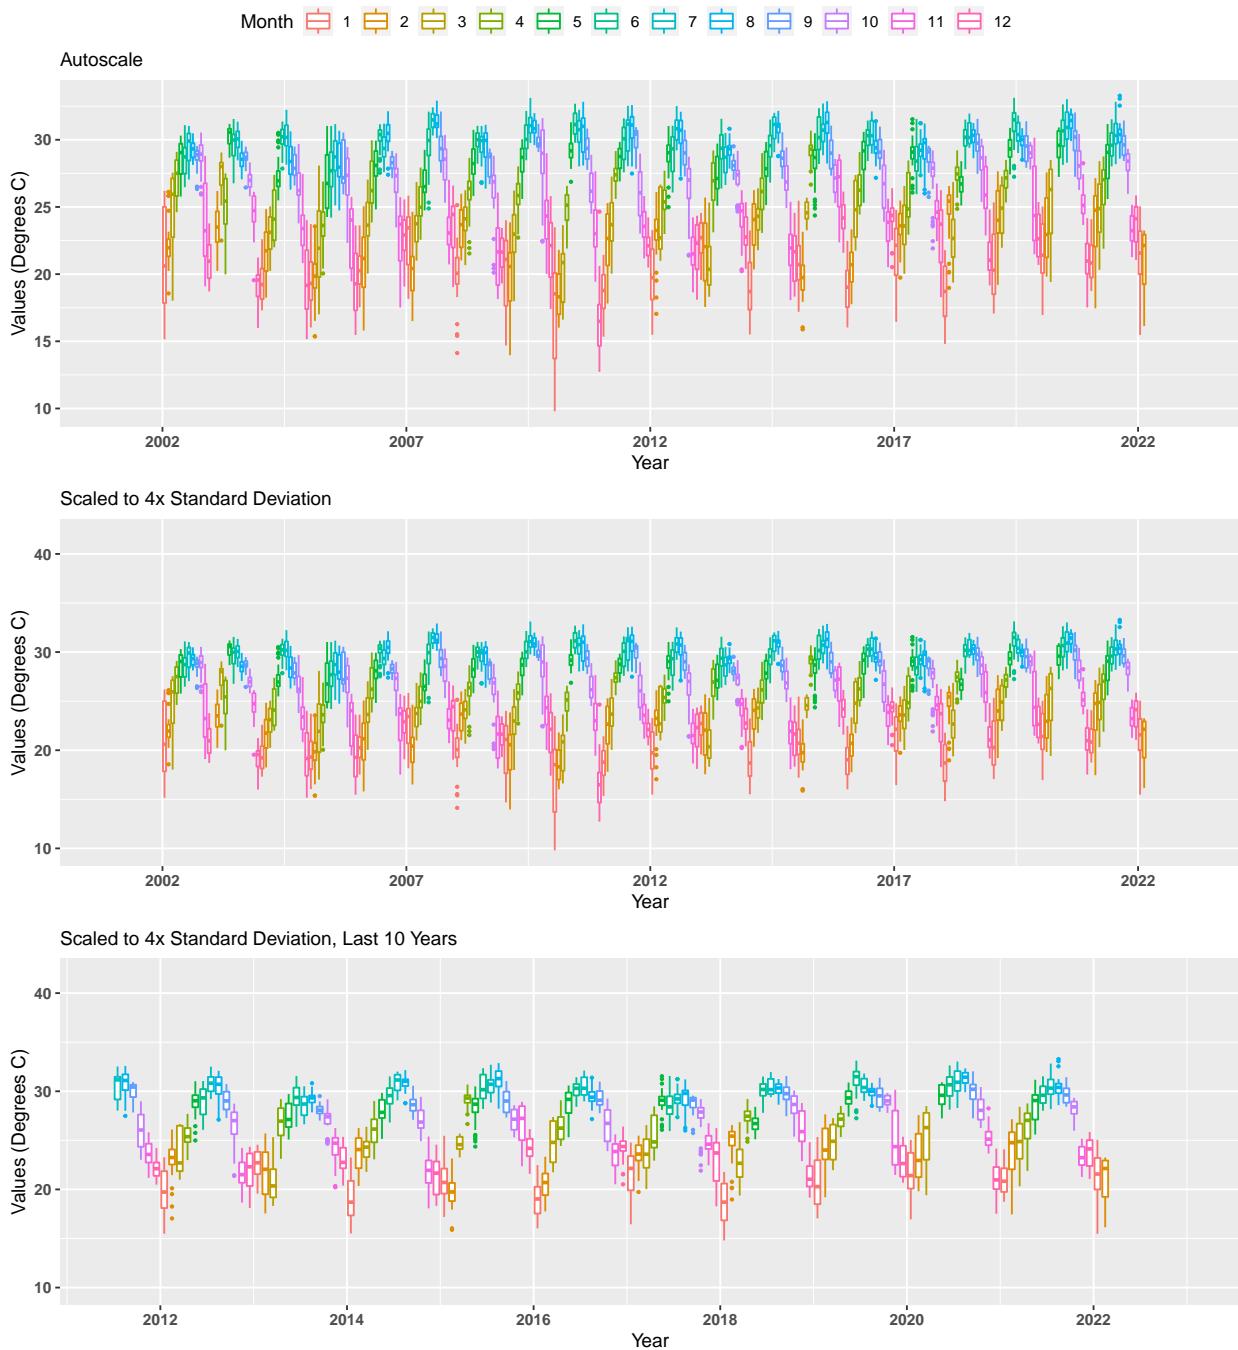


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbfwuq
 By Month

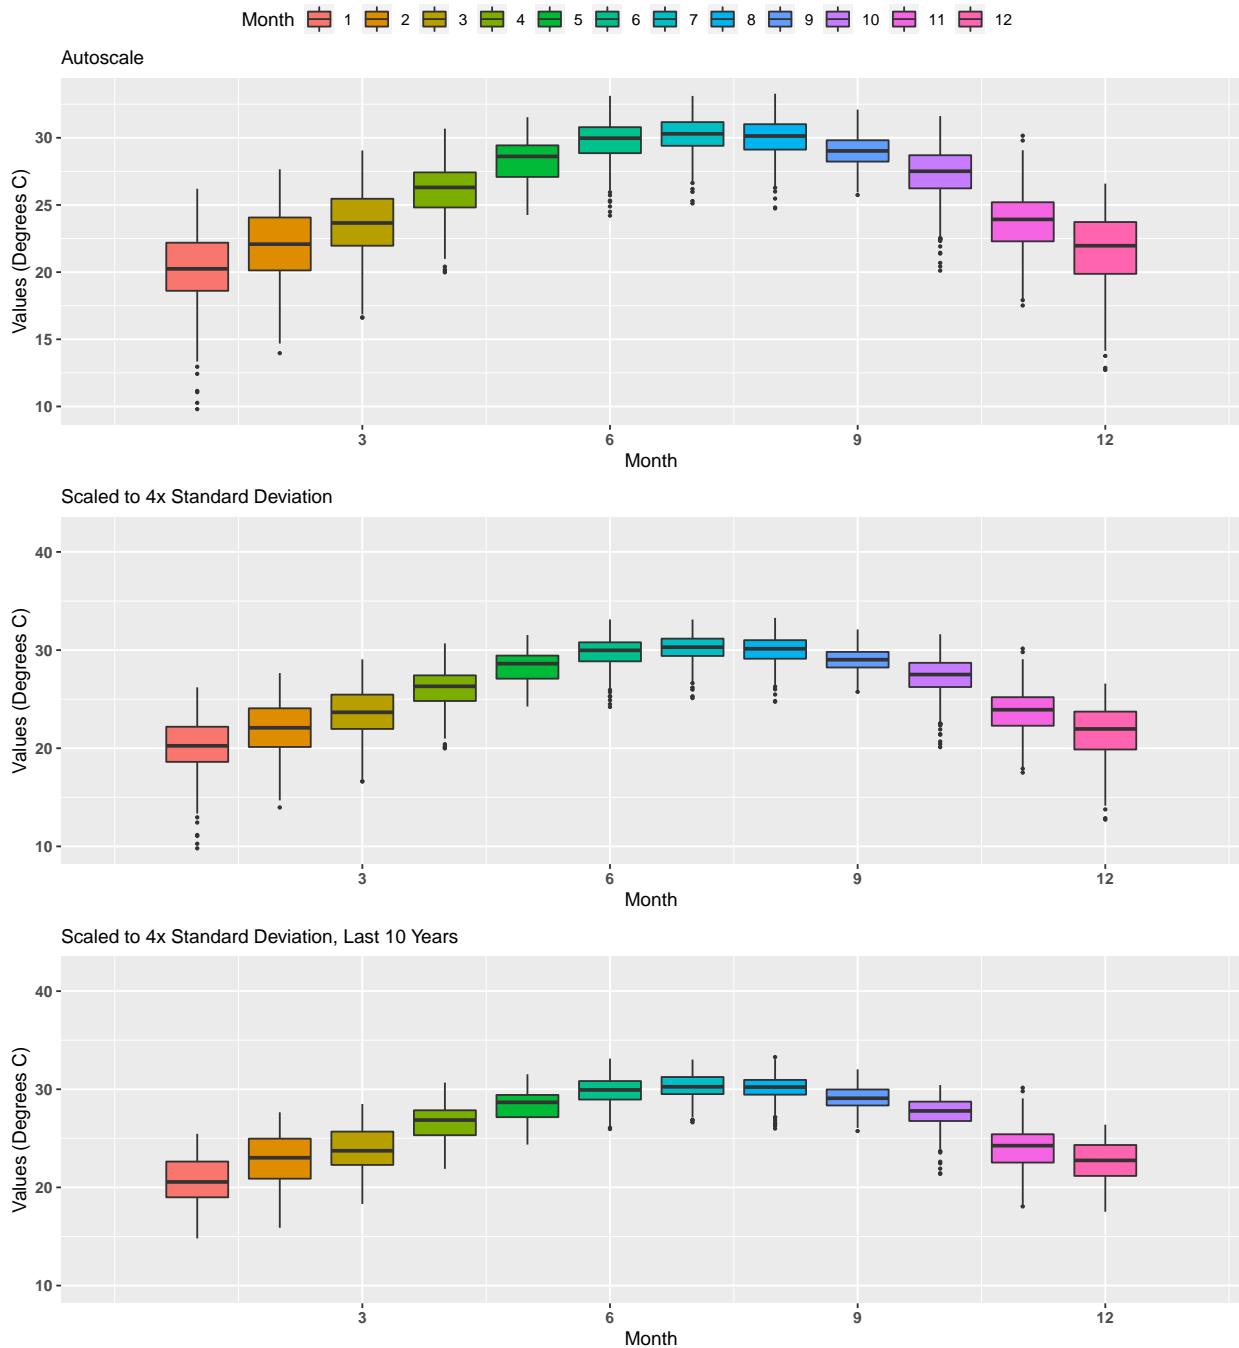


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq
By Year

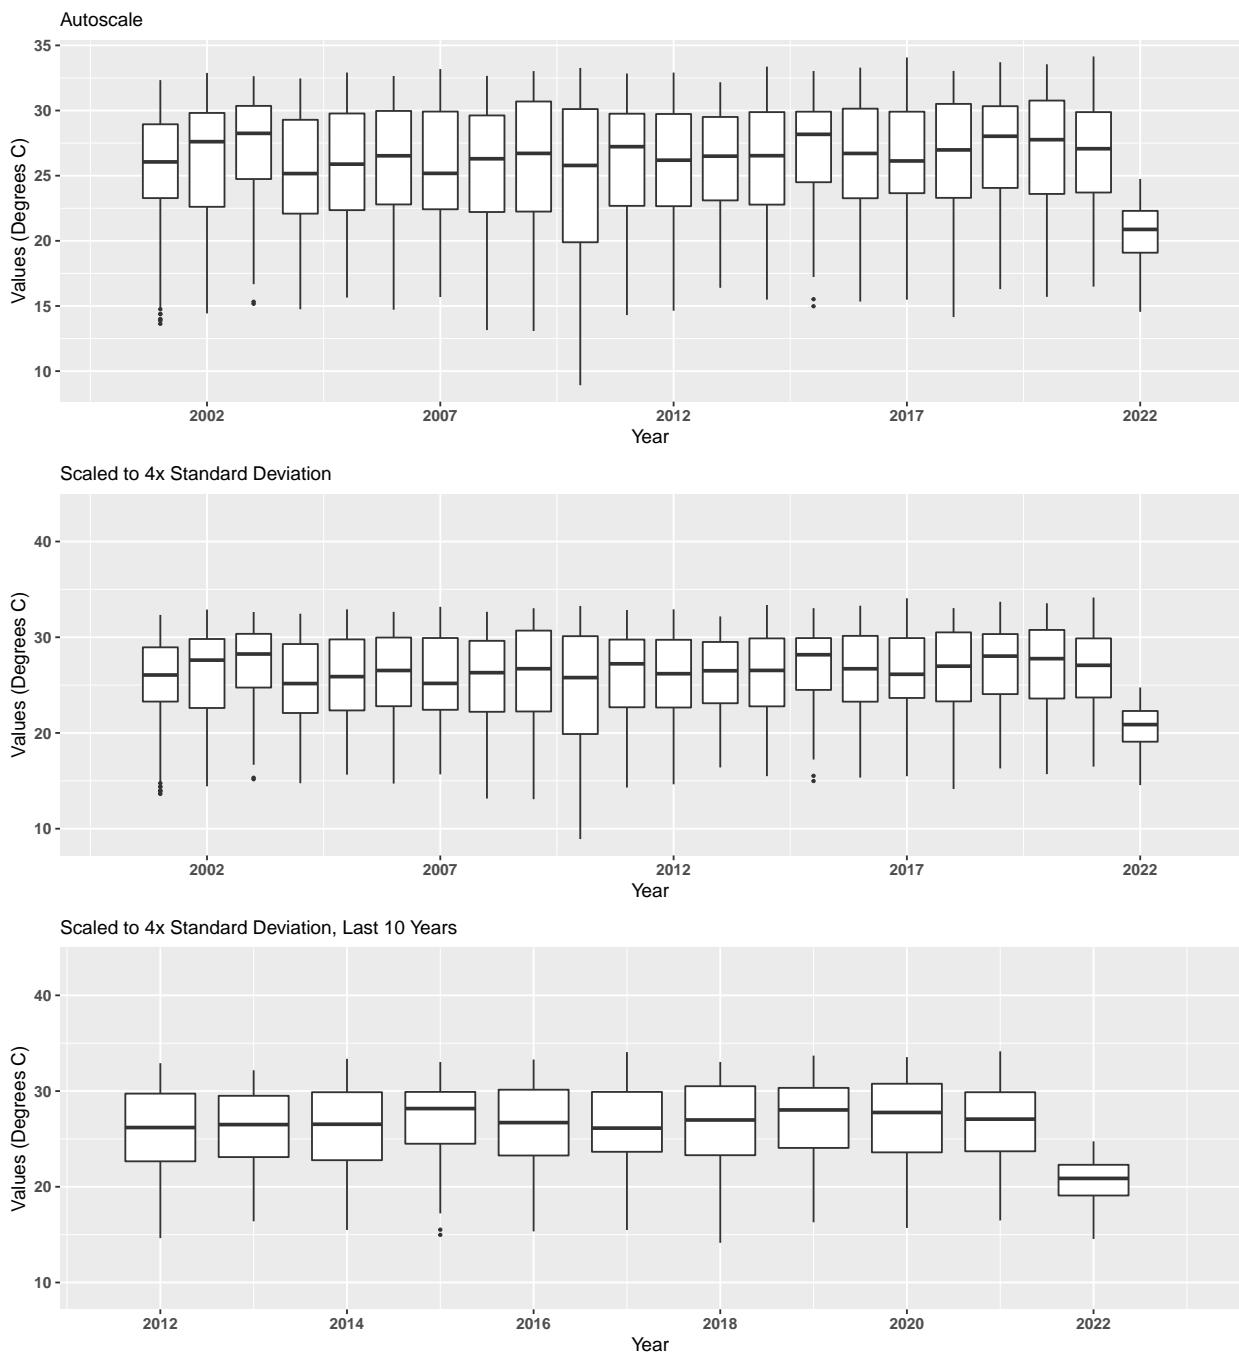


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq
 By Year & Month

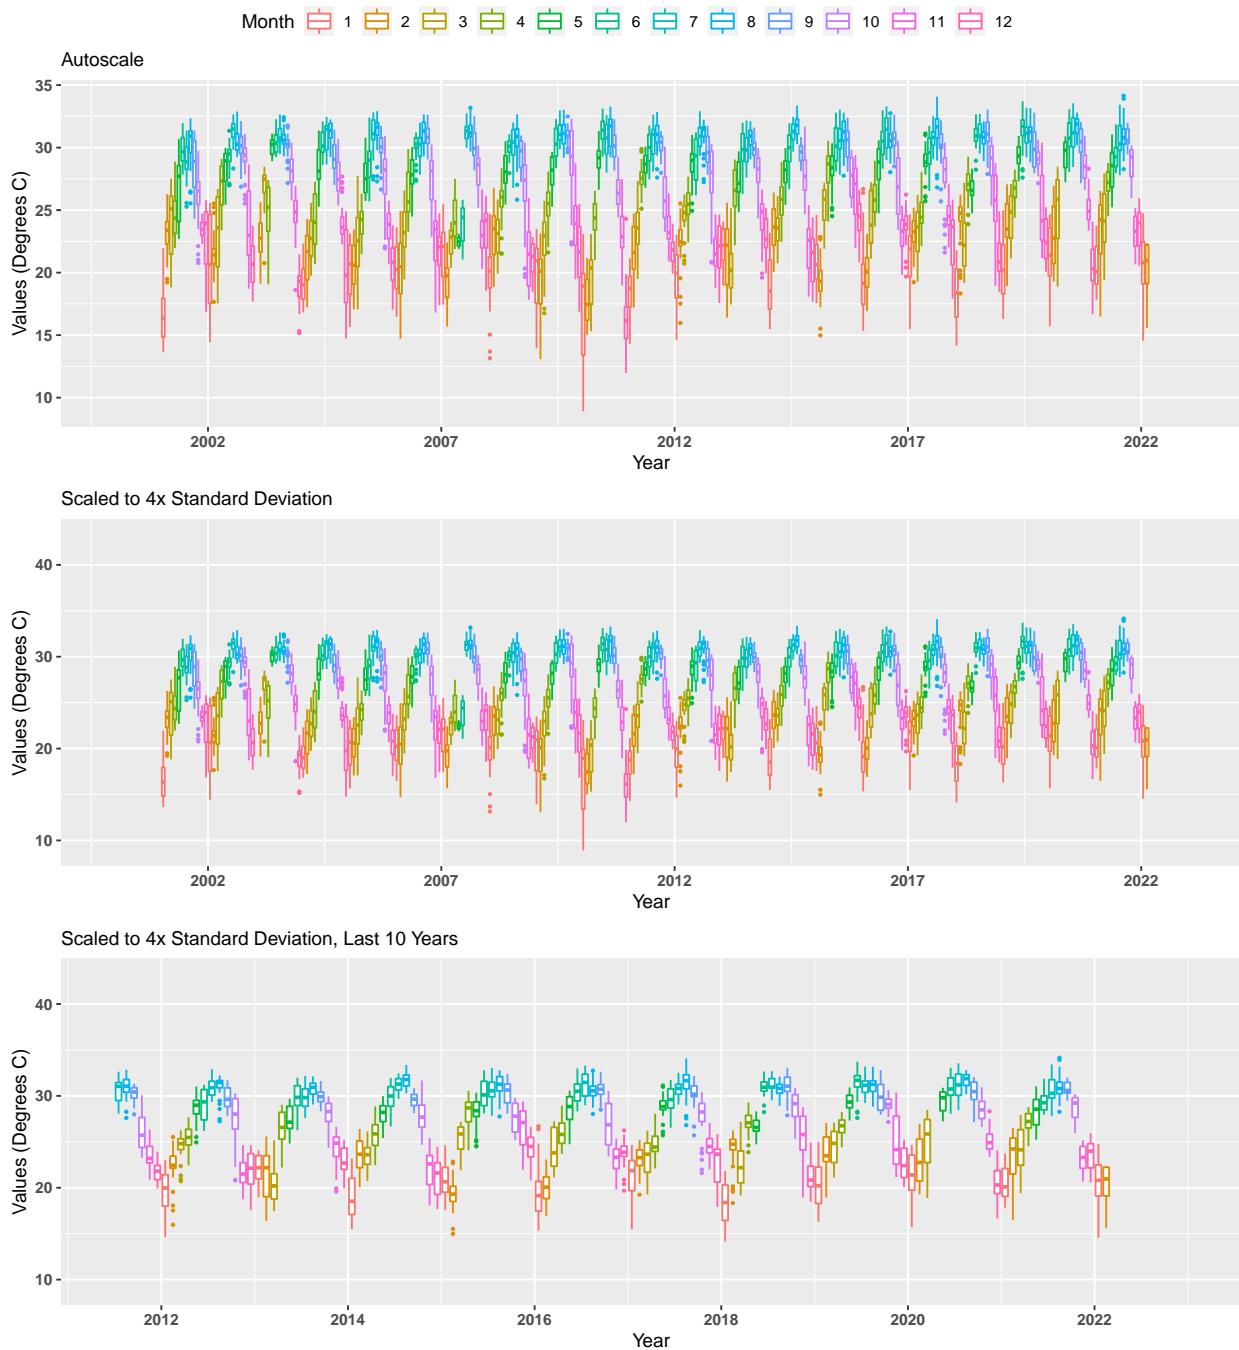


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbhwq
 By Month

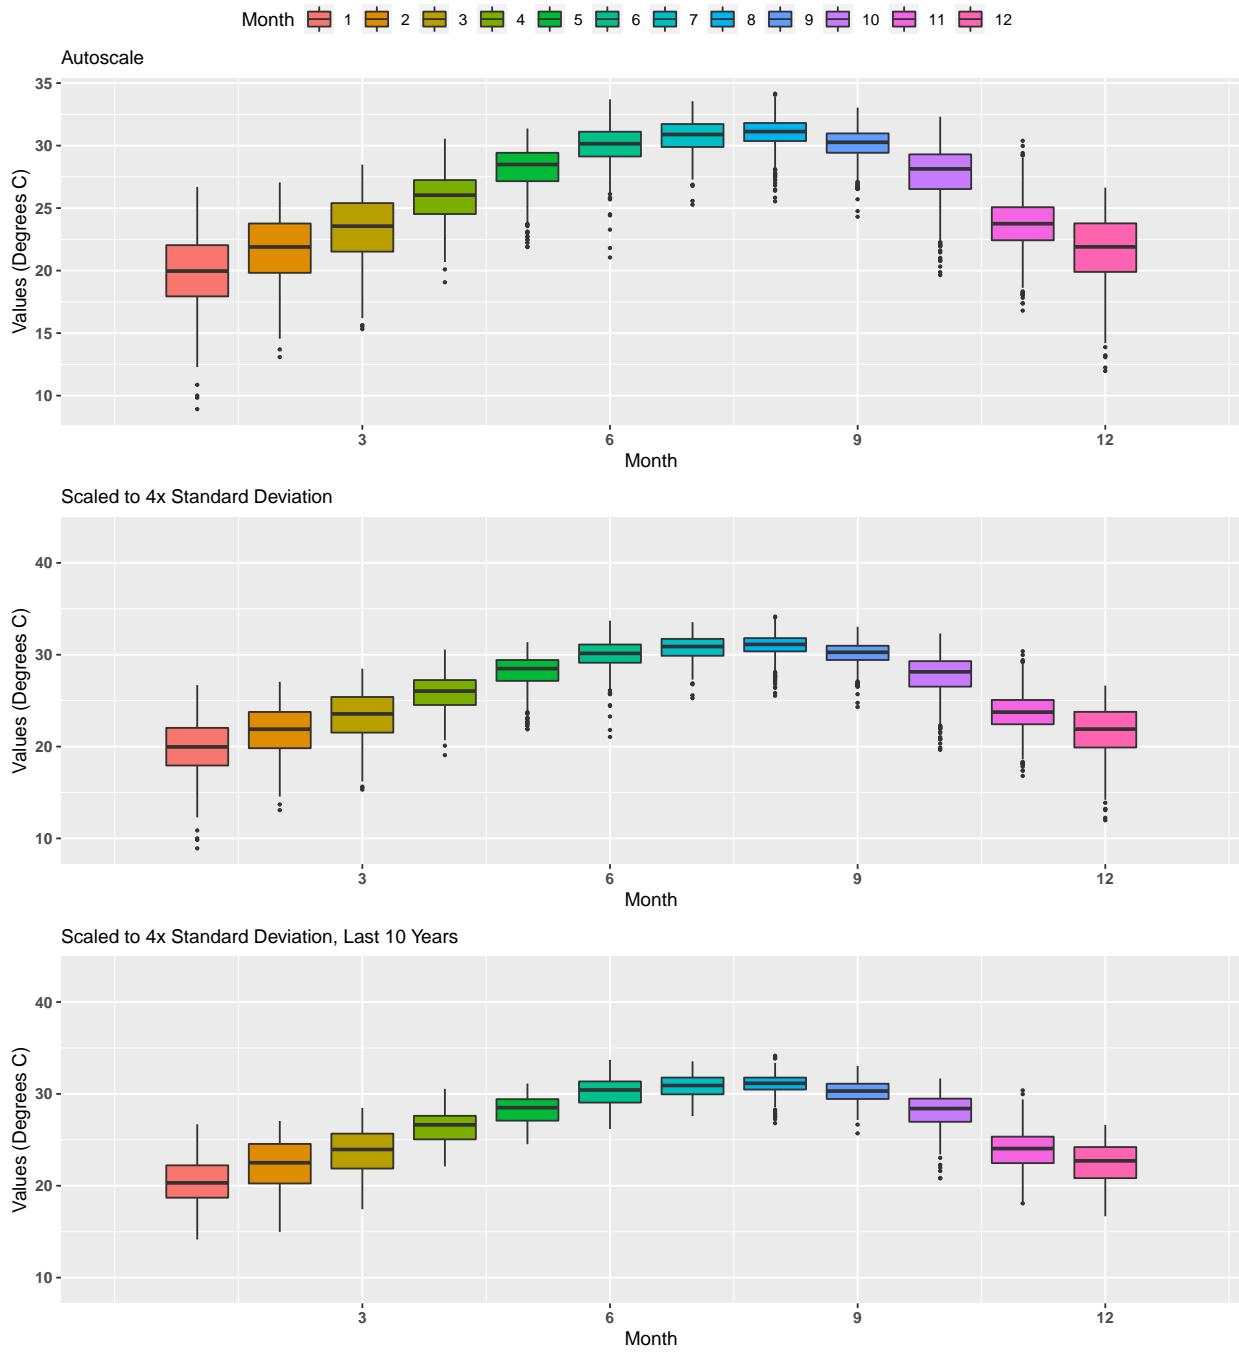

Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbmbwq
 By Year

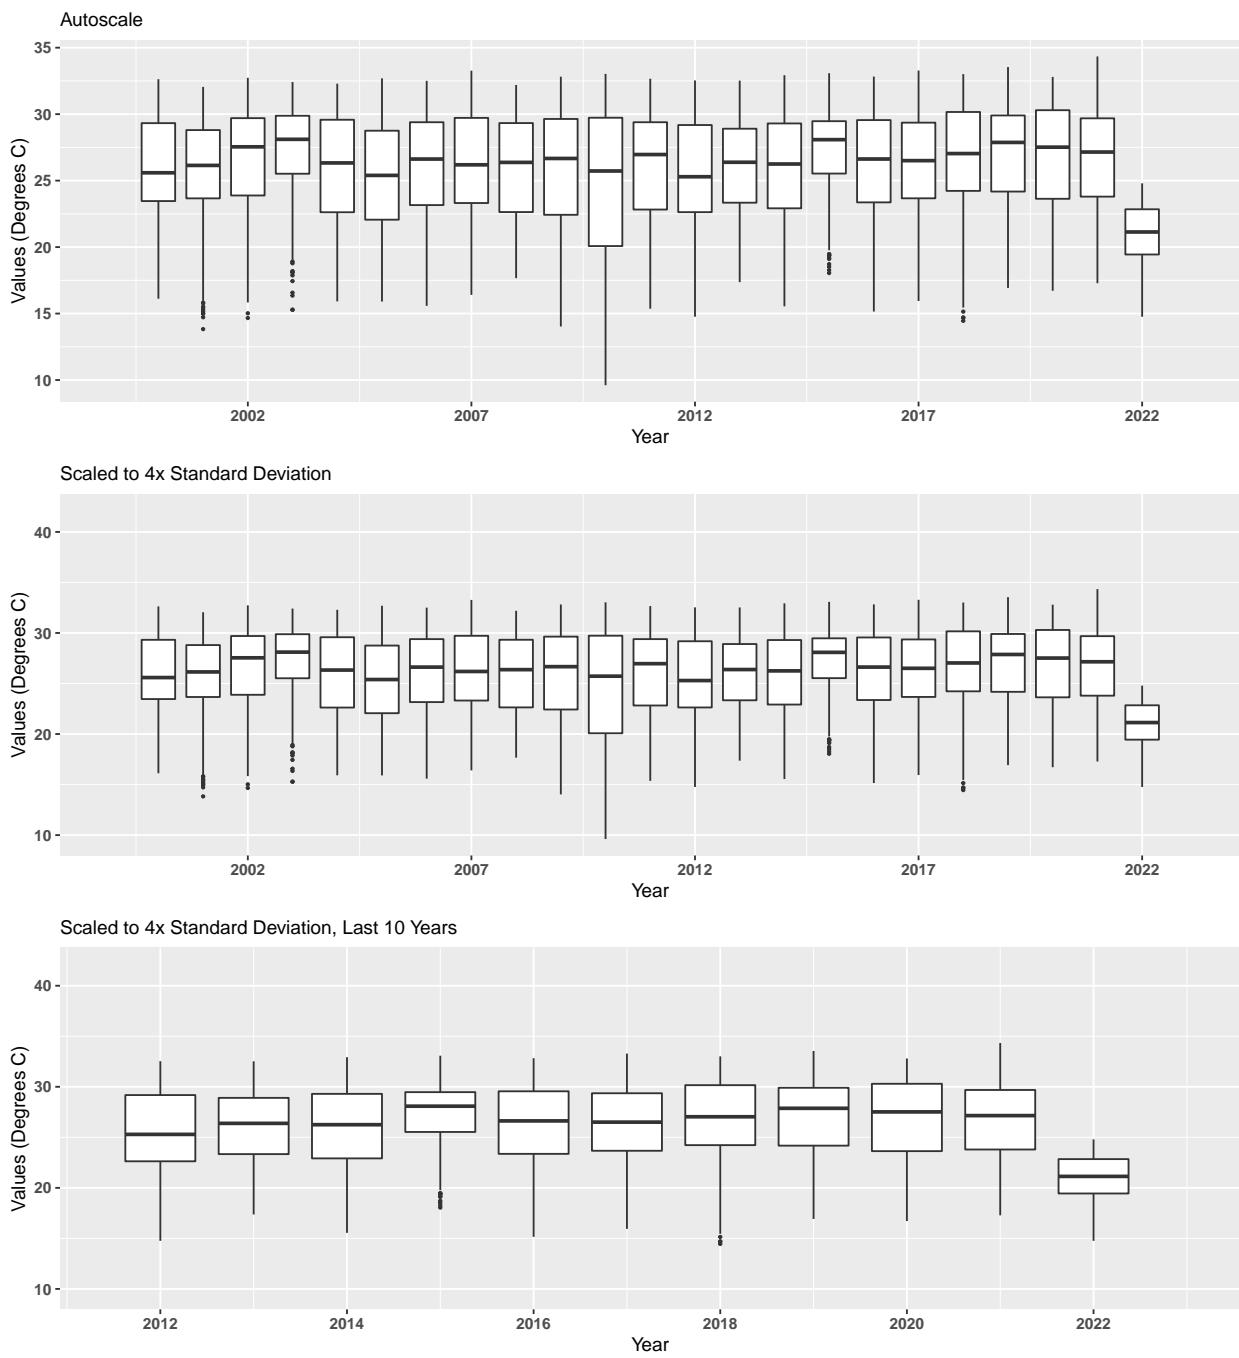


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbmbwq
 By Year & Month

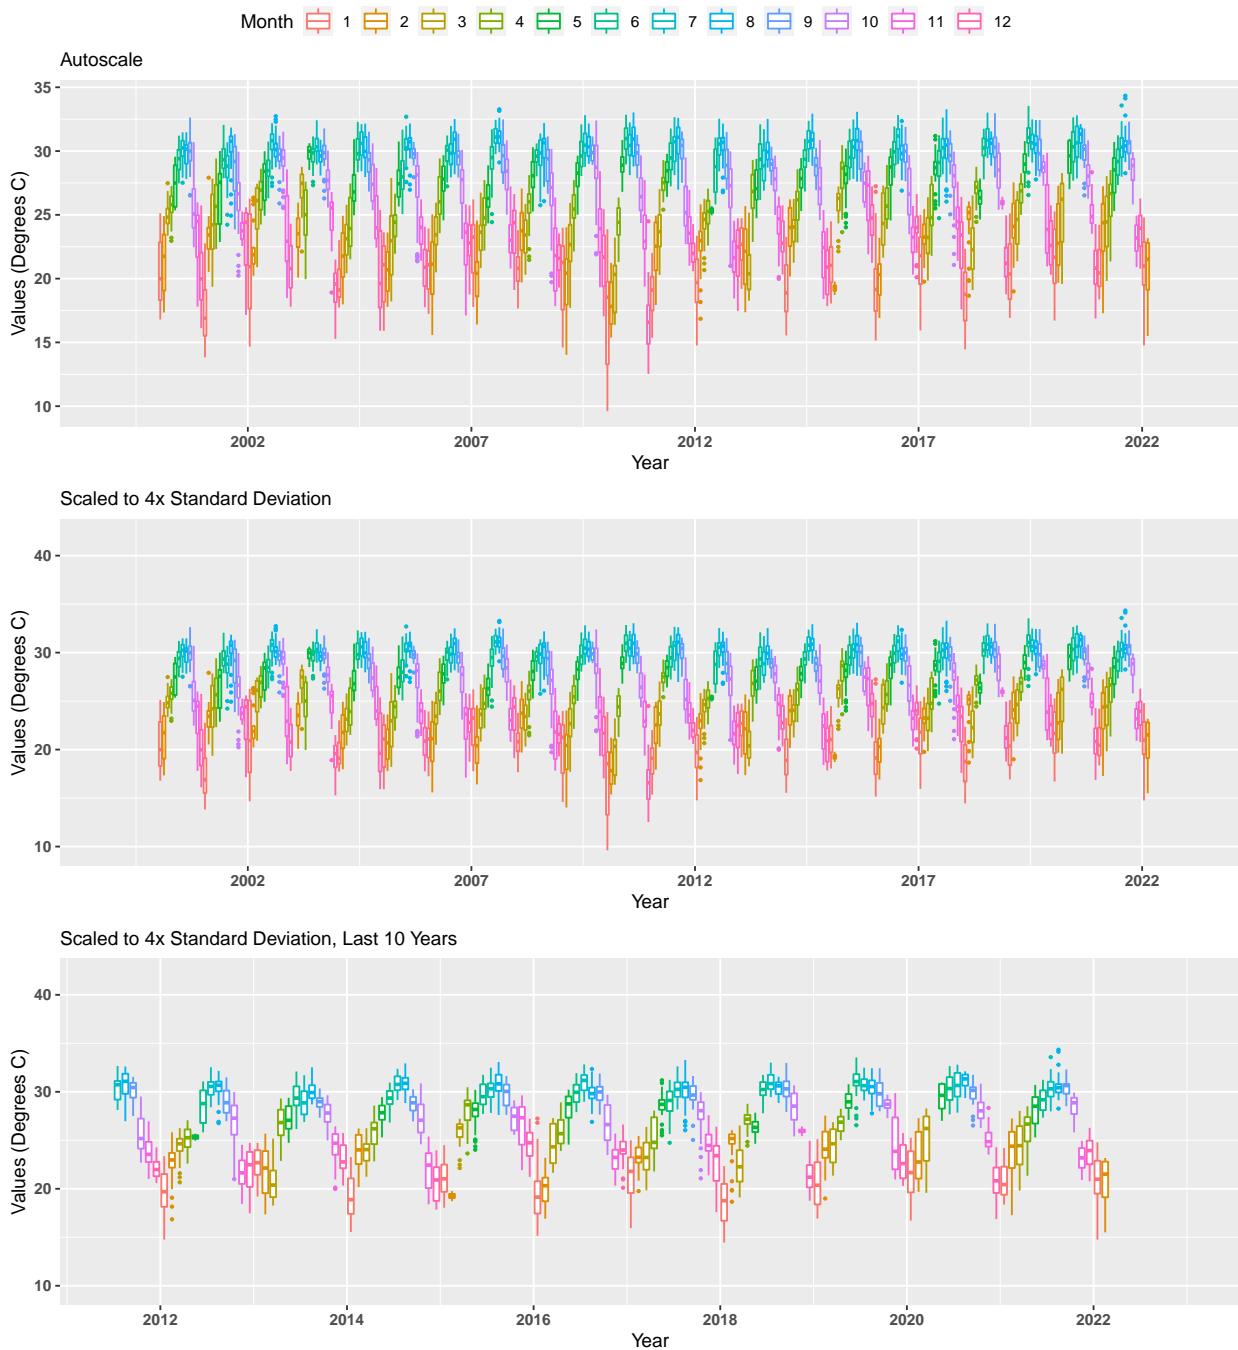


Summary Box Plots for Rookery Bay National Estuarine Research Reserve

354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbmbwq


By Month

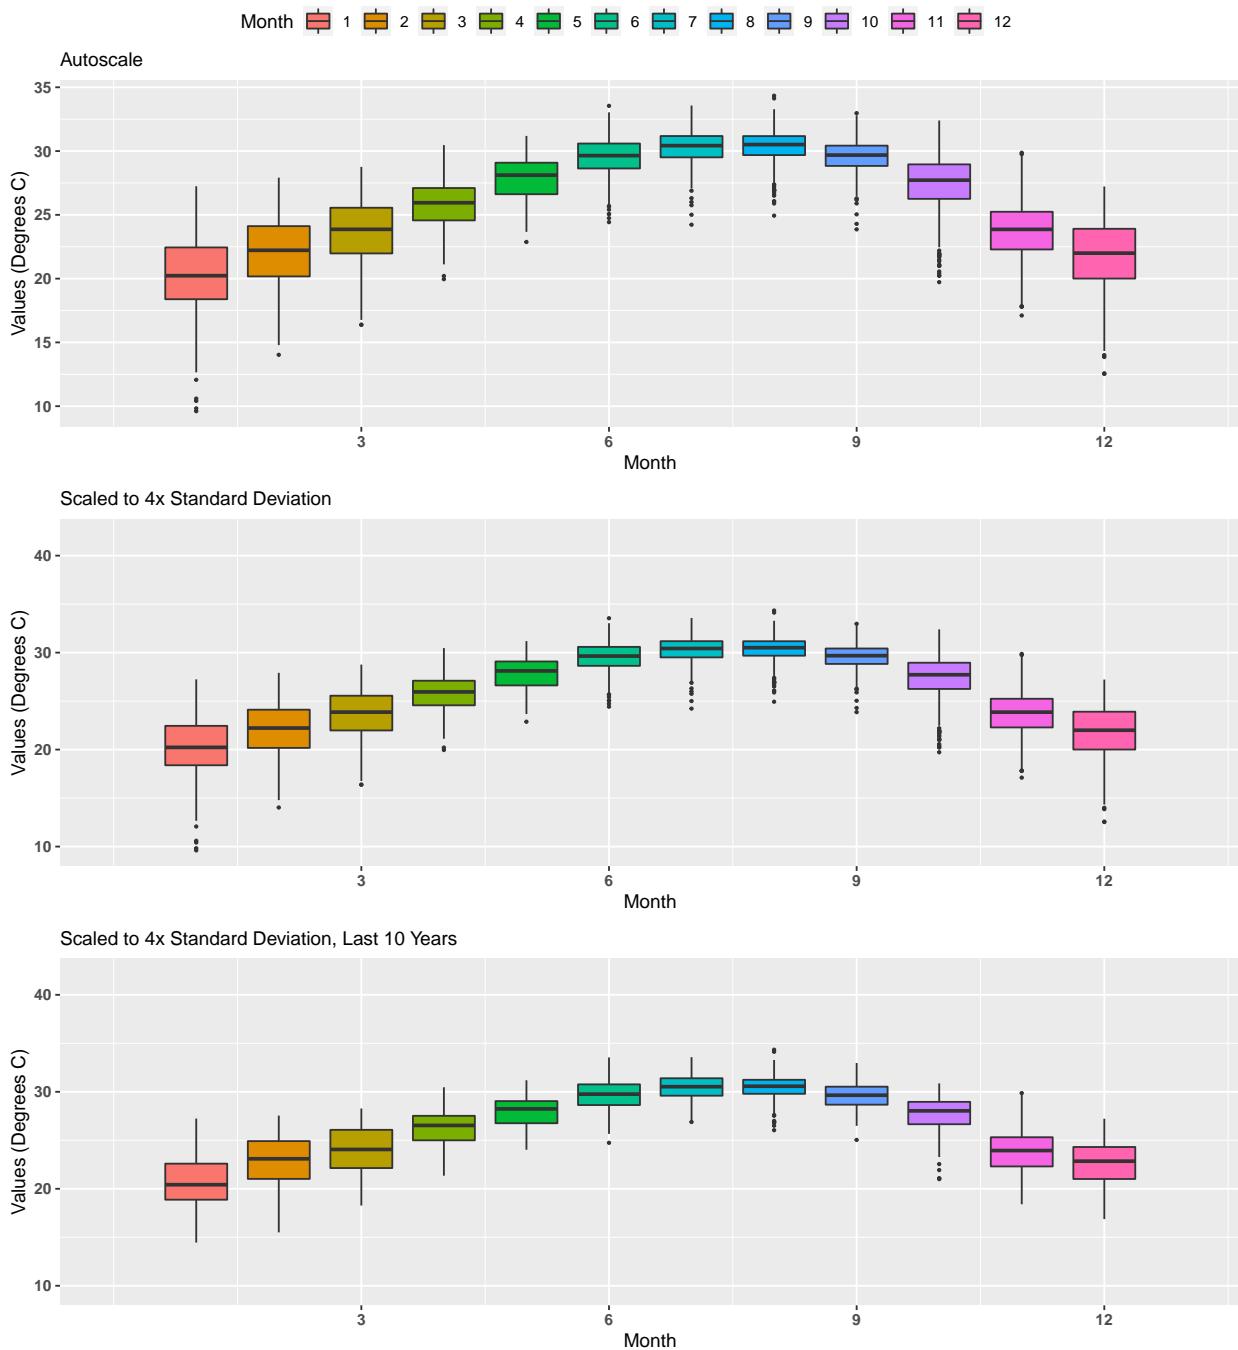


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbpbwq
By Year

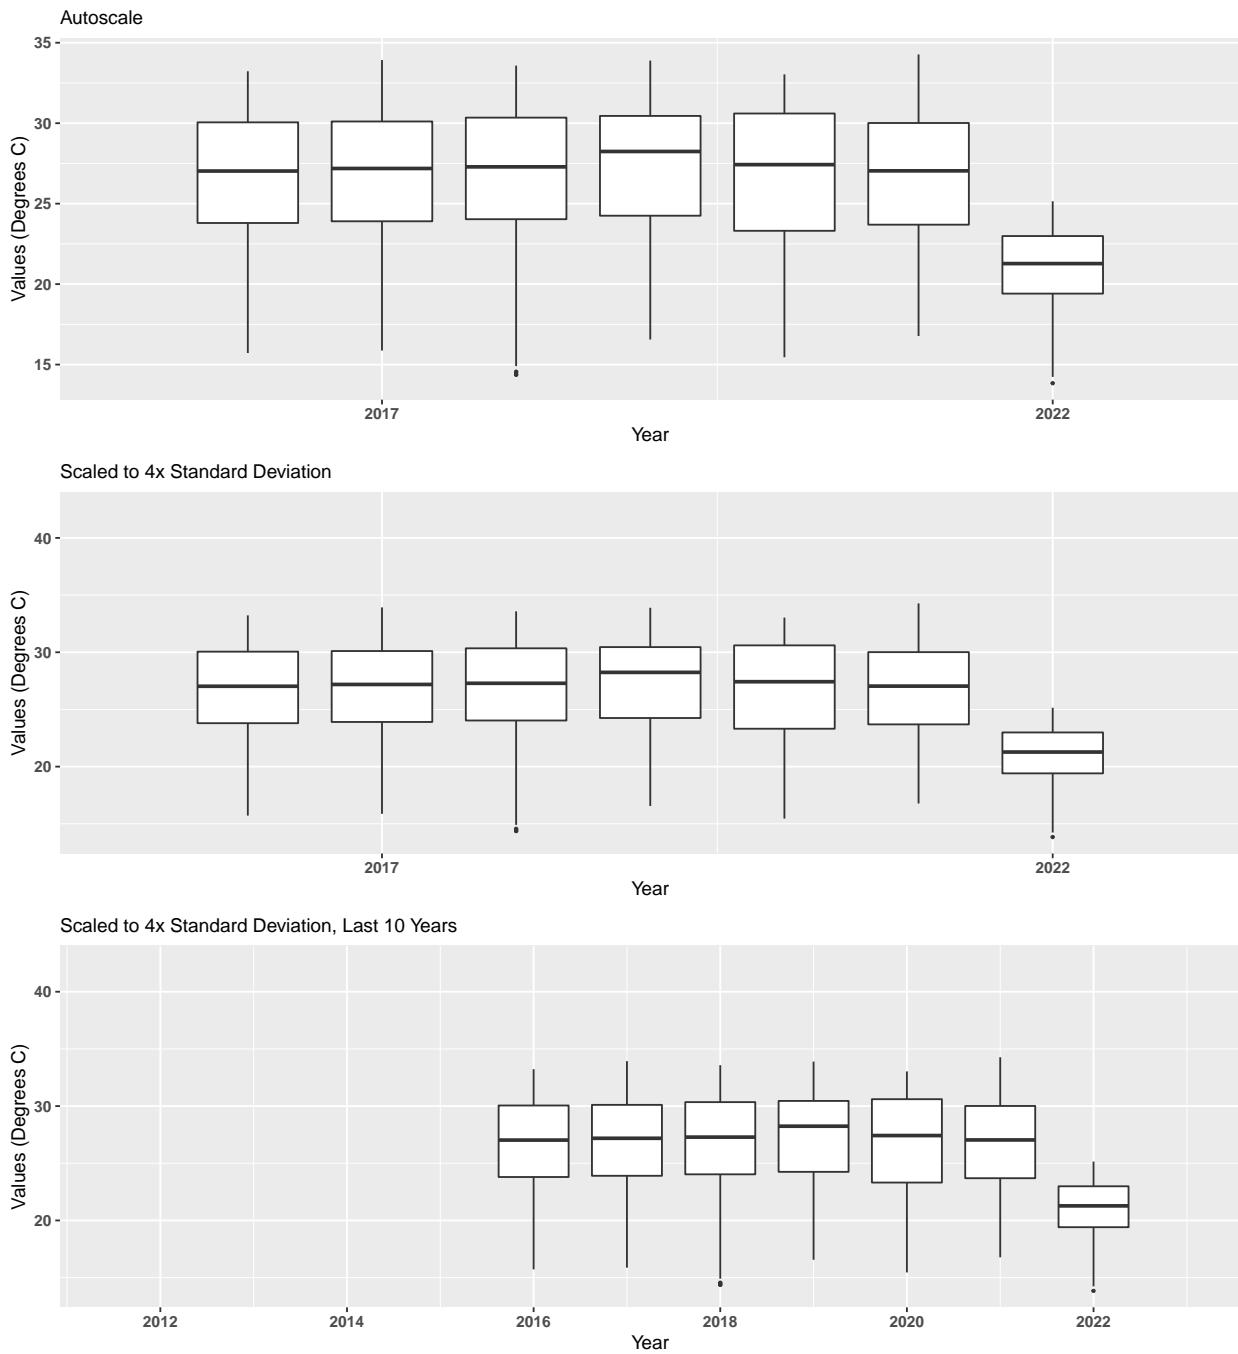


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbpbwq
 By Year & Month

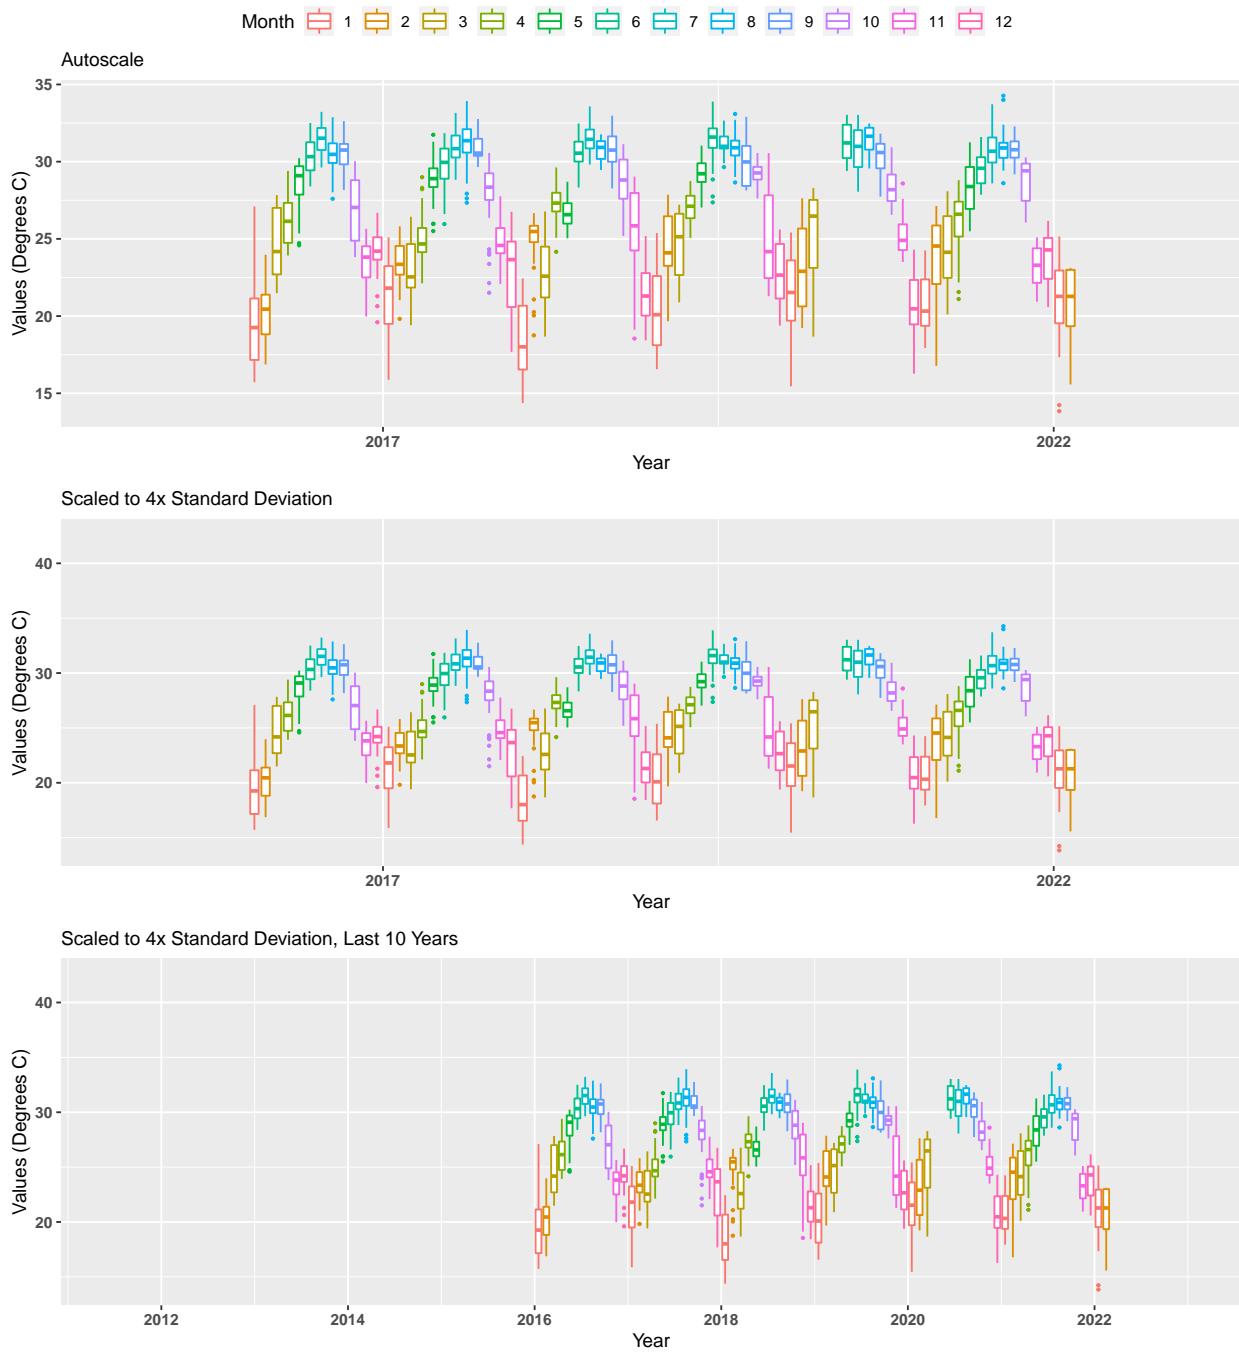


Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbpbwq
By Month

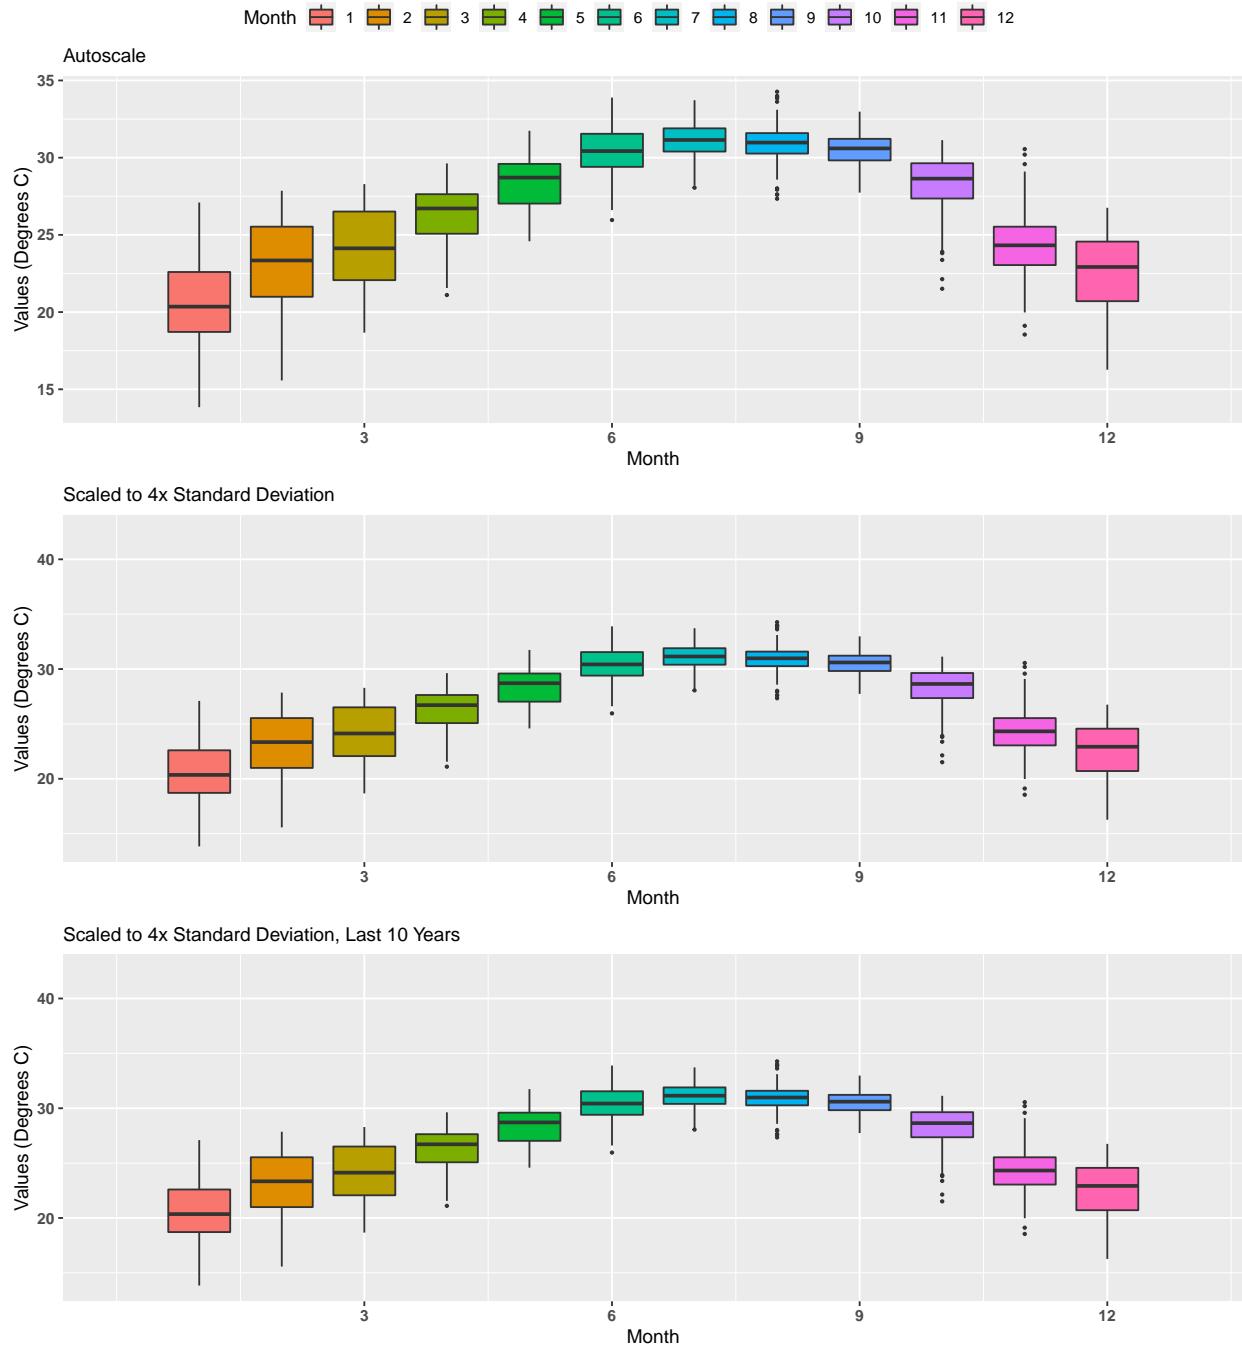

Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbuhwq
By Year

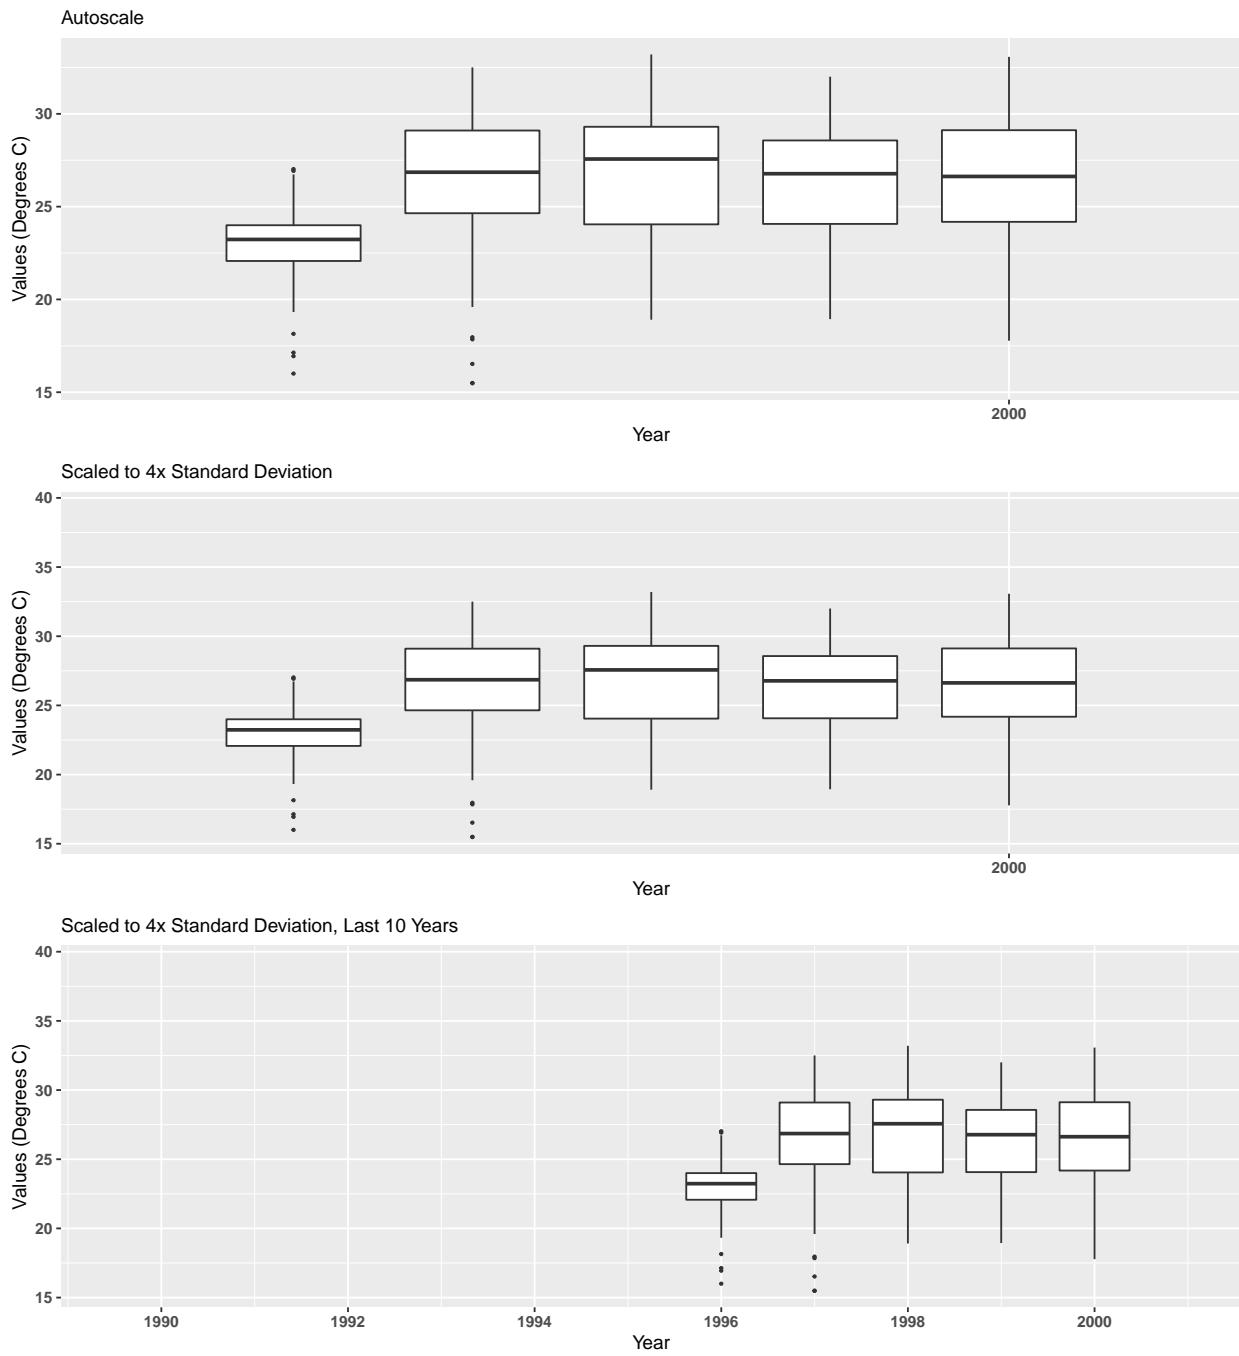

Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbuhwq
 By Year & Month

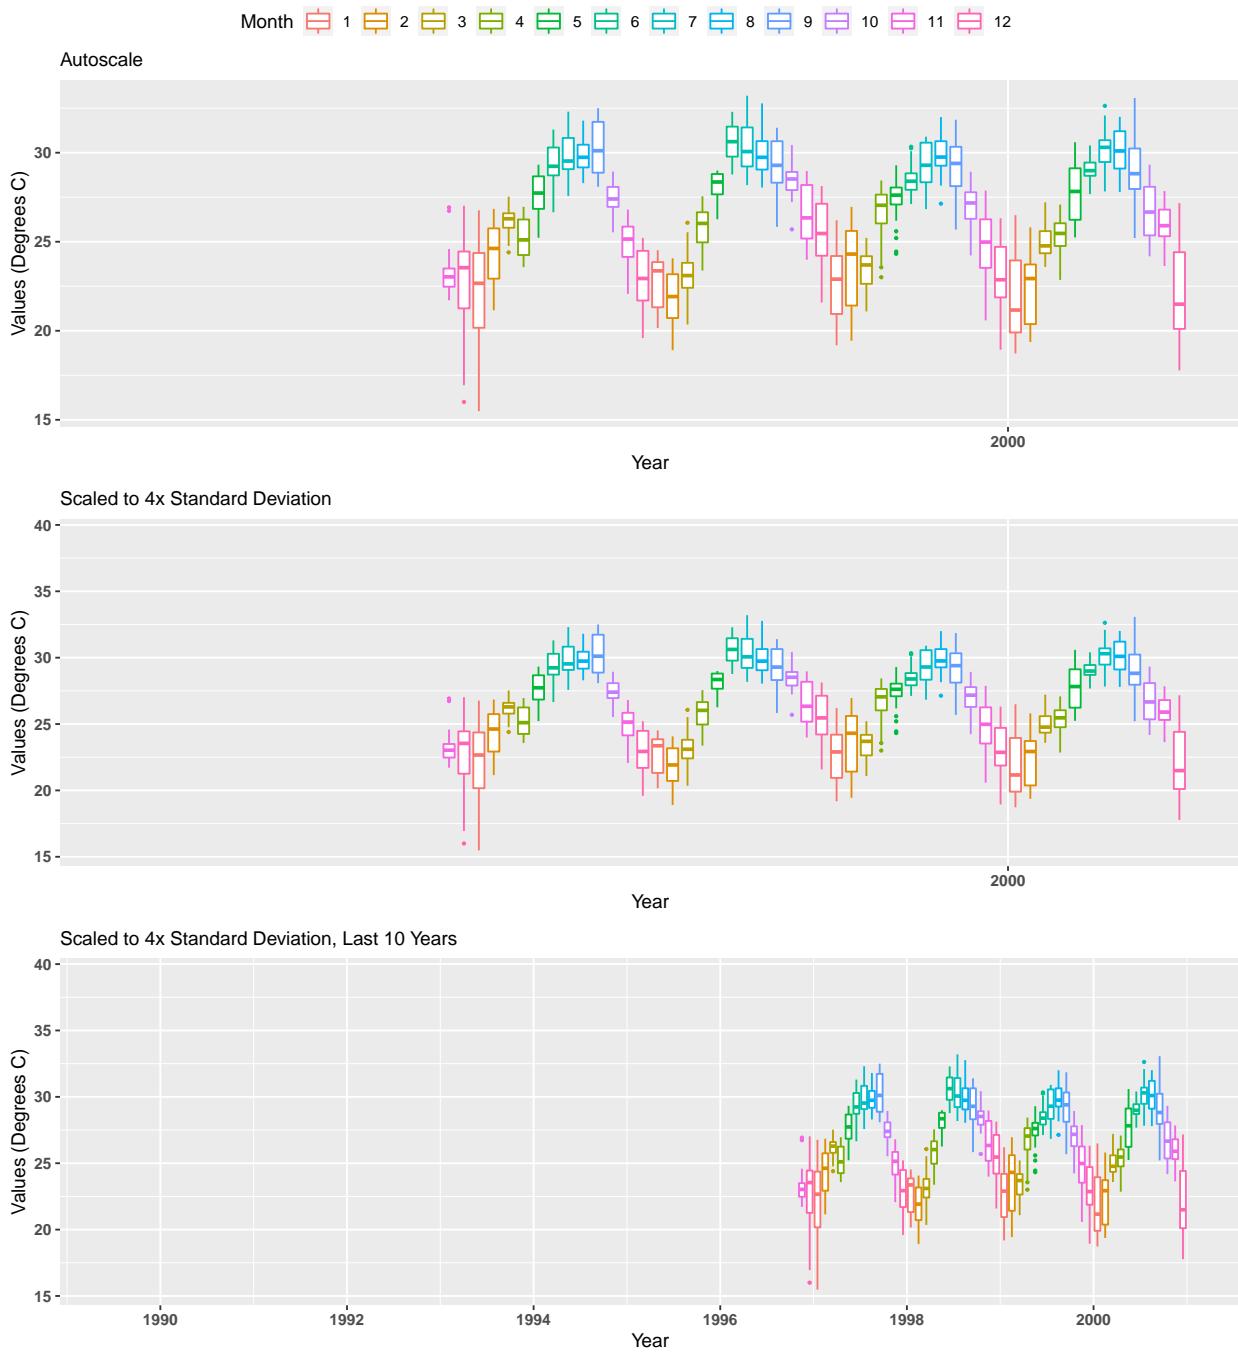

Summary Box Plots for Rookery Bay National Estuarine Research Reserve
354 | Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program | rkbuhwq
 By Month

