

# SEACAR Continuous Water Quality Analysis: SW Region for Water Temperature

Last compiled on 16 July, 2023

## Contents

<b>Important Notes</b>	<b>1</b>
<b>Libraries and Settings</b>	<b>2</b>
<b>File Import</b>	<b>2</b>
<b>Data Filtering</b>	<b>3</b>
<b>Monitoring Location Statistics</b>	<b>6</b>
<b>Seasonal Kendall Tau Analysis</b>	<b>8</b>
<b>Appendix I: Dataset Summary Box Plots</b>	<b>11</b>
<b>Appendix II: Monitoring Location Trendlines</b>	<b>17</b>
<b>Appendix III: Monitoring Location Summary Box Plots</b>	<b>45</b>
<b>Appendix IV: Excluded Monitoring Locations</b>	<b>127</b>

## Important Notes

The purpose of this script is to create monitoring location statistics, perform seasonal Kendall Tau analysis, generate summary plots, and create reports in pdf and Word document form for each parameter in WC Continuous.

These scripts were created by [J.E. Panzik \(jepanzik@usf.edu\)](mailto:jepanzik@usf.edu) for SEACAR.

All scripts and outputs can be found on the SEACAR GitHub repository:

[https://github.com/FloridaSEACAR/SEACAR\\_Trend\\_Analyses](https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses)

This markdown file is designed to be compiled by [SEACAR\\_WC\\_Continuous\\_ReportRender.R](#) ([https://github.com/FloridaSEACAR/SEACAR\\_Trend\\_Analyses/blob/main/WQ\\_Continuous/SEACAR\\_WC\\_Continuous\\_ReportRender.R](https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/blob/main/WQ_Continuous/SEACAR_WC_Continuous_ReportRender.R)).

Note: The top 2% of data is excluded when computing mean and standard deviations in plotting sections solely for the purpose of getting y-axis scales. The exclusion of the top 2% is not used in any statistics that are exported.

## Libraries and Settings

Loads libraries used in the script. The inclusion of `scipen` option limits how frequently R defaults to scientific notation. Sets default settings for displaying warning and messages in created document, and sets figure dpi.

```
library(knitr)
library(data.table)
library(dplyr)
library(lubridate)
library(ggplot2)
library(ggpubr)
library(scales)
library(EnvStats)
library(tidyr)
library(kableExtra)
options(scipen=999)
knitr:::opts_chunk$set(
  warning=FALSE,
  message=FALSE,
  dpi=200
)
```

## File Import

Imports file that is determined in the SEACAR\_WC\_Continuous\_ReportRender.R script.

The command `fread` is used because of its improved speed while handling large data files. Only columns that are used by the script are imported from the file, and are designated in the `select` input.

The script then gets the name of the parameter as it appears in the data file and units of the parameter.

The latest version of WC Continuous data is available at: <https://usf.box.com/s/7ocbmmdsm5bgfz6535t8btrnj3r73ysch>

The file being used for the analysis is: **Combined\_WQ\_WC\_NUT\_cont\_Water\_Temperature\_SW-2023-Jul-14.txt**

```
data <- fread(file_in, sep="|", header=TRUE, stringsAsFactors=FALSE,
  select=c("ManagedAreaName", "ProgramID", "ProgramName",
    "ProgramLocationID", "SampleDate", "Year", "Month",
    "RelativeDepth", "ActivityType", "ParameterName",
    "ResultValue", "ParameterUnits", "ValueQualifier",
    "SEACAR_QAQCFlagCode", "Include"),
  na.strings=c("NULL", "", "NA"))
parameter <- unique(data$ParameterName)
unit <- unique(data$ParameterUnits)
cat(paste("The data file(s) used:", file_short, sep="\n"))

## The data file(s) used:
## Combined_WQ_WC_NUT_cont_Water_Temperature_SW-2023-Jul-14.txt
```

## Data Filtering

Most data filtering is performed on export from the database, and is indicated by the `Include` variable. `Include` values of 1 indicate the data should be used for analysis, values of 0 indicate the data should not be used for analysis. Documentation on the database filtering is provided here: [SEACAR Documentation-Analysis Filters and Calculations.pdf](#)

The filtering that is performed by the script at this point removes rows that are missing values for `ResultValue` and `RelativeDepth`, and removes any activity type that has “Blank” in the description. Data passes the filtering the process if it is has an `Include` value of 1.

Creates a variable for each `MonitoringID` which is defined as a unique combination of `ManagedAreaName`, `ProgramID`, `ProgramAreaName`, and `ProgramLocationID`.

After the initial filtering, a second filter variable is created to determine whether enough time is represented in the monitoring location, which is that each monitoring location has 5 year or more of unique year entries and have at least 2 consecutive years of observations with at least 2 repeating months for observations that pass the initial filter. If data passes the first set of filtering criteria and the time criteria, they are used in the analysis.

The function that determines whether a monitoring location has at least 2 consecutive years of observations with at least 2 repeating months takes the data, creates a list of the monitoring IDs and cycles through each monitoring ID. For each monitoring ID cycle:

1. List the unique years and put them in ascending order
2. If there are fewer than 2 unique years, skip to the next area
3. If there are 2 or more unique years, start a loop that compares adjacent year entries for the area
  - Start with the first two year entries
4. See if the year entries are subsequent years (1 year apart)
  - If not, skip to next pair of years
5. For the two years being compared, get the list of months for each
6. Compare the two lists of months to see what months are the same
  - If there are two or more months that are the same, the location passes the criteria and is stored in a variable
7. The list of IDs that pass the 2 consecutive years with at least 2 repeating months is returned and used to determine if there is sufficient data for analysis.

A data frame is created that stores summary information for each monitoring location. This information is stored and combined with the results of the Seasonal Kendall Tau analysis and export to a data file once combined.

The sufficient data qualifier is merged with the original data, and a variable `Use_In_Analysis` is created to indicate what data should be used.

A variable with the monitoring IDs that pass all criteria is created and stored.

```
# Converts Include to be a logical either TRUE or FALSE
data$Include <- as.logical(data$Include)
# Removes any data rows that do not have Include set to TRUE
data <- data[data$Include==TRUE,]
# Removes rows that have missing ResultValues
data <- data[!is.na(data$ResultValue),]
# Removes rows that have missing RelativeDepth
```

```

data <- data[!is.na(data$RelativeDepth),]
# Removes rows that have an ActivityType with Blank
data <- data[!grep("Blank", data$ActivityType),]

# Removes any data below threshold value of 0, or 5 for Water Temperature
if(param_name=="Water_Temperature"){
  data <- data[data$ResultValue>=-5,]
} else{
  data <- data[data$ResultValue>=0,]
}

# Gets list of managed areas for the specific region being looked at
MA_All_Region <- MA_All[MA_All$Region==region,]

# Gets AreaID for data by merging data with the managed area list for the region
data <- merge.data.frame(MA_All_Region[,c("AreaID", "ManagedAreaName")],
                         data, by="ManagedAreaName", all=TRUE)

# Creates MonitoringID to more easily cycle through monitoring locations
data <- data %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName,
           ProgramLocationID) %>%
  mutate(MonitoringID=cur_group_id())

# Creates function to checks monitoring location for at least 2 years of
# continuous consecutive data
ContinuousConsecutiveCheck <- function(con_data){
  # Gets MonitoringIDs
  IDs <- unique(con_data$MonitoringID[con_data$Include==TRUE &
                                         !is.na(con_data$Include)])
  # Loops through each MonitoringID
  for(i in 1:length(IDs)) {
    # Gets list of Years for MonitoringID
    Years <- unique(con_data$Year[con_data$MonitoringID==IDs[i] &
                                    con_data$Include==TRUE &
                                    !is.na(con_data$Include)])
    # Puts Years in order
    Years <- Years[order(Years)]
    # If there are fewer than 2 years, skip to next MonitoringID
    if(length(Years)<2) {
      next
    }
    # Starts loop to make sure there are at least 2 consecutive years with
    # consecutive months of data
    for(j in 2:length(Years)) {
      # If adjacent year entries are not 1 year apart, skip to the next set
      # of year entries
      if(Years[j]-Years[j-1] !=1) {
        next
      }
      # Gets the list of months from the first year
      Months1 <- unique(con_data$Month[con_data$MonitoringID==IDs[i] &
                                         con_data$Year==Years[j-1] &
                                         con_data$Include==TRUE &

```

```

                !is.na(con_data$Include)])
# Gets list of months for the second year
Months2 <- unique(con_data$Month[con_data$MonitoringID==IDs[i] &
                           con_data$Year==Years[j] &
                           con_data$Include==TRUE &
                           !is.na(con_data$Include)])
# If there are more than 2 months shared between the two years, the
# MonitoringID passes the check and is stored
if(length(intersect(Months1, Months2))>=2) {
  # Creates variable for stored MonitoringID if it doesn't exist
  if(exists("consecutive")==FALSE){
    consecutive <- IDs[i]
    break
  } else{
    # Adds to variable for storing MonitoringID if does exist
    consecutive <- append(consecutive, IDs[i])
    break
  }
}
# After going through all MonitoringID, return variable with list of all
# that pass
return(consecutive)
}

# Stores the MonitoringID that pass the consecutive year check
consMonthIDs <- ContinuousConsecutiveCheck(data)

# Creates data frame with summary for each monitoring location.
Mon_Summ <- data %>%
  group_by(MonitoringID, AreaID, ManagedAreaName, ProgramID, ProgramName,
           ProgramLocationID) %>%
  summarize(ParameterName=parameter,
            RelativeDepth=unique(RelativeDepth),
            N_Data=length(ResultValue[Include==TRUE & !is.na(ResultValue)]),
            N_Years=length(unique(Year[Include==TRUE & !is.na(Year)])),
            EarliestYear=min(Year[Include==TRUE]),
            LatestYear=max(Year[Include==TRUE]),
            EarliestSampleDate=min(SampleDate[Include==TRUE]),
            LastSampleDate=max(SampleDate[Include==TRUE]),
            ConsecutiveMonths=ifelse(unique(MonitoringID) %in%
                                      consMonthIDs==TRUE, TRUE, FALSE),
            # Determines if monitoring location is sufficient for analysis
            # based on having more than 0 data entries, more than the
            # sufficient number of year, and the consecutive month criteria
            SufficientData=ifelse(N_Data>0 & N_Years>=suff_years &
                                     ConsecutiveMonths==TRUE, TRUE, FALSE),
            Median=median(ResultValue, na.rm=TRUE))
Mon_Summ$consecutiveMonths <- NULL

# Puts summary data in order based on MonitoringID
Mon_Summ <- as.data.table(Mon_Summ[order(Mon_Summ$MonitoringID), ])

```

```

# Creates column in data that determines how many years from the start for each
# Monitoring location
data <- data %>%
  group_by(MonitoringID) %>%
  mutate(YearFromStart=Year-min(Year))
# Adds SufficientData column to data table based on MonitoringID
data <- merge.data.frame(data, Mon_Summ[,c("MonitoringID", "SufficientData")],
                         by="MonitoringID")
# Creates Use_In_Analysis column for data that is determined if the row has
# Include value of TRUE and SufficientData value of TRUE
data$Use_In_Analysis <- ifelse(data$Include==TRUE & data$SufficientData==TRUE,
                                 TRUE, FALSE)
# Get list of and number of MonitoringID that are to be used in analysis
Mon_IDs <- unique(data$MonitoringID[data$Use_In_Analysis==TRUE])
Mon_IDs <- Mon_IDs[order(Mon_IDs)]
n <- length(Mon_IDs)

```

## Monitoring Location Statistics

Gets summary statistics for each monitoring location. Excluded monitoring locations are not included into whether the data should be used or not. Uses piping from dplyr package to feed into subsequent steps. The following steps are performed:

1. Take the `data` variable and only include rows that have a `Use_In_Analysis` value of TRUE
2. Group data that have the same `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, `Year`, and `Month`.
  - Second summary statistics consider the monitoring location grouping and `Year`.
  - Third summary statistics consider the monitoring location grouping and `Month`.
3. For each group, provide the following information: Earliest Sample Date (`EarliestSampleDate`), Latest Sample Date (`LastSampleDate`), Number of Entries (`N`), Lowest Value (`Min`), Largest Value (`Max`), Median, Mean, Standard Deviation, and a list of all Program IDs included in these measurements.
4. Sort the data in ascending (A to Z and 0 to 9) order based on `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, `Year`, and `Month` in that order.
5. Write summary stats to a pipe-delimited .txt file in the output directory
  - WC Continuous Output Files in SEACAR GitHub ([https://github.com/FloridaSEACAR/SEACAR\\_Trend\\_Analyses/tree/main/WQ\\_Continuous/output](https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/tree/main/WQ_Continuous/output))

Because the continuous data is extensive and most measurements are taken every 15 minutes, a daily average is determined and used based on grouping `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, and `SampleDate`. The new `ResultValue` is the mean of all values on that date from that specific monitoring location. Sets the `SampleDate` as a date object, and creates various scales of the date to be used by plotting functions.

```

# Create summary statistics for each monitoring location based on Year and Month
# intervals.
Mon_YM_Stats <- data[data$Use_In_Analysis==TRUE, ] %>%
  group_by(MonitoringID, AreaID, ManagedAreaName, ProgramID, ProgramName,
           ProgramLocationID, Year, Month) %>%
  summarize(ParameterName=parameter,

```

```

RelativeDepth=unique(RelativeDepth),
EarliestSampleDate=min(SampleDate),
LastSampleDate=max(SampleDate),
N_Data=length(ResultValue),
Min=min(ResultValue), Max=max(ResultValue),
Median=median(ResultValue), Mean=mean(ResultValue),
StandardDeviation=sd(ResultValue))
# Puts the data in order based on ManagedAreaName, ProgramID, ProgramName,
# ProgramLocationID, Year, then Month
Mon_YM_Stats <- as.data.table(Mon_YM_Stats[order(Mon_YM_Stats$ManagedAreaName,
                                                 Mon_YM_Stats$ProgramID,
                                                 Mon_YM_Stats$ProgramName,
                                                 Mon_YM_Stats$ProgramLocationID,
                                                 Mon_YM_Stats$Year,
                                                 Mon_YM_Stats$Month), ])
# Writes summary statistics to file without MonitoringID
fwrite(select(Mon_YM_Stats, -MonitoringID),
       paste0(out_dir_param, "/WC_Continuous_", param_abrev, "_",
              region, "_MonLoc_MMYY_Stats.txt"), sep="|")
# Get year from start for each monitoring location
Mon_YM_Stats <- Mon_YM_Stats %>%
  group_by(MonitoringID) %>%
  mutate(YearFromStart=Year-min(Year))
# Create decimal value of year and month values
Mon_YM_Stats$YearMonthDec <- Mon_YM_Stats$Year + ((Mon_YM_Stats$Month-0.5) / 12)

# Create summary statistics for each monitoring location based on Year
# intervals.
Mon_Y_Stats <- data[data$Use_In_Analysis==TRUE, ] %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
           Year) %>%
  summarize(ParameterName=parameter,
            RelativeDepth=unique(RelativeDepth),
            EarliestSampleDate=min(SampleDate),
            LastSampleDate=max(SampleDate), N_Data=length(ResultValue),
            Min=min(ResultValue), Max=max(ResultValue),
            Median=median(ResultValue), Mean=mean(ResultValue),
            StandardDeviation=sd(ResultValue))
# Puts the data in order based on ManagedAreaName, ProgramID, ProgramName,
# ProgramLocationID, then Year
Mon_Y_Stats <- as.data.table(Mon_Y_Stats[order(Mon_Y_Stats$ManagedAreaName,
                                                Mon_Y_Stats$ProgramID,
                                                Mon_Y_Stats$ProgramName,
                                                Mon_Y_Stats$ProgramLocationID,
                                                Mon_Y_Stats$Year), ])
# Writes summary statistics to file
fwrite(Mon_Y_Stats, paste0(out_dir_param, "/WC_Continuous_", param_abrev, "_",
                           region, "_MonLoc_Yr_Stats.txt"), sep="|")

# Create summary statistics for each monitoring location based on Month
# intervals.
Mon_M_Stats <- data[data$Use_In_Analysis==TRUE, ] %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,

```

```

    Month) %>%
summarize(ParameterName=parameter,
          RelativeDepth=unique(RelativeDepth),
          EarliestSampleDate=min(SampleDate),
          LastSampleDate=max(SampleDate), N_Data=length(ResultValue),
          Min=min(ResultValue), Max=max(ResultValue),
          Median=median(ResultValue), Mean=mean(ResultValue),
          StandardDeviation=sd(ResultValue))
# Puts the data in order based on ManagedAreaName, ProgramID, ProgramName,
# ProgramLocationID, then Month
Mon_M_Stats <- as.data.table(Mon_M_Stats[order(Mon_M_Stats$ManagedAreaName,
                                                Mon_M_Stats$ProgramID,
                                                Mon_M_Stats$ProgramName,
                                                Mon_M_Stats$ProgramLocationID,
                                                Mon_M_Stats$Month), ])
# Writes summary statistics to file
fwrite(Mon_M_Stats, paste0(out_dir_param,"/WC_Continuous_", param_abrev, "_",
                           region, "_MonLoc_Mo_Stats.txt"), sep="|")
# Reduces size of data by getting a daily average
data <- data %>%
  group_by(MonitoringID, AreaID, ManagedAreaName, ProgramID, ProgramName,
           ProgramLocationID, SampleDate) %>%
  summarise(Year=unique(Year), Month=unique(Month),
            RelativeDepth=unique(RelativeDepth),
            ResultValue=mean(ResultValue), Include=unique(Include),
            Use_In_Analysis=unique(Use_In_Analysis))
# Sets column formats to appropriate types
data$SampleDate <- as.Date(data$SampleDate)
data$YearMonth <- format(data$SampleDate, format = "%m-%Y")
data$YearMonthDec <- data$Year + ((data$Month-0.5) / 12)
data$DecDate <- decimal_date(data$SampleDate)

```

## Seasonal Kendall Tau Analysis

Gets seasonal Kendall Tau statistics using the `kendallSeasonalTrendTest` from the `EnvStats` package. The Trend parameter is determined from a user-defined function based on the median, Senn slope, and p values from the data. Analysis modified from that performed at The Water Atlas: <https://sarasota.wateratlas.usf.edu/water-quality-trends/#analysis-overview>

The following steps are performed:

1. Set the column names for the variable holding the SKT stat values
2. Create a data frame with the same number of columns as column names, and the same number of rows as the number of monitoring locations being analyzed.
3. Starts a loop that goes through each monitoring location (MonitoringID)
4. Gets data for that MonitoringID and the number of data rows.
5. Gets basic statistics for the MonitoringID from the Mon\_Summ variable.
6. Performs a seasonal Kendall Tau trend test with the assumption that data is not serially correlated (independent.obs=TRUE)

- If analysis returns NULL, performs SKT assuming data is serially auto-correlated (independent.obs=FALSE)
7. Store the SKT result values in the skt\_stats data frame created.
  8. Determines the Trend of the slope based on the statistics and SKT parameters.
  9. Merge data frames together to create a cumulative data frame with all statistics and round values to appropriate decimal points.
  10. Write summary stats to a pipe-delimited .txt file in the output directory
- WC Continuous Output Files in SEACAR GitHub ([https://github.com/FloridaSEACAR/SEACAR\\_Trend\\_Analyses/tree/main/WQ\\_Continuous/output](https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/tree/main/WQ_Continuous/output))

After the analysis is performed, a variable is created that stores the x & y coordinates of the SKT trend line to be used for plotting

```
# List for column names
c_names <- c("MonitoringID", "Independent", "tau", "p",
           "SennSlope", "SennIntercept", "ChiSquared", "pChiSquared", "Trend")

skt_stats <- data.frame(matrix(ncol = length(c_names), nrow = n))

colnames(skt_stats) <- c_names
# Determines if there are any monitoring locations to analyze
if(n==0){
  print("There are no monitoring locations that qualify.")
} else{
  # Starts cycling through Monitoring locations to determine seasonal
  # Kendall Tau
  for (i in 1:n) {
    # Gets the number of rows of data for the monitoring location
    data_SKT <- Mon_YM_Stats[Mon_YM_Stats$MonitoringID==Mon_IDs[i], ]
    x <- nrow(data_SKT)
    # Perform analysis if there is more than 1 row
    if (x>0) {
      # Store the monitoring location summary statistics to be used in
      # trend analysis
      SKT.med <- Mon_Summ$Median[Mon_Summ$MonitoringID==Mon_IDs[i]]
      SKT.minYr <- Mon_Summ$EarliestYear[Mon_Summ$MonitoringID==Mon_IDs[i]]
      SKT.maxYr <- Mon_Summ$LatestYear[Mon_Summ$MonitoringID==Mon_IDs[i]]
      SKT.ind <- TRUE
      SKT <- kendallSeasonalTrendTest(y=data_SKT$Mean,
                                         season=data_SKT$Month,
                                         year=data_SKT$YearFromStart,
                                         independent.obs=SKT.ind)
      if(is.na(SKT$estimate[1])==TRUE){
        SKT.ind <- FALSE
        SKT <- kendallSeasonalTrendTest(y=data_SKT$Mean,
                                         season=data_SKT$Month,
                                         year=data_SKT$YearFromStart,
                                         independent.obs=SKT.ind)
      }
      skt_stats$MonitoringID[i] <- Mon_IDs[i]
    }
  }
}
```

```

skt_stats$Independent[i] <- SKT.ind
skt_stats$tau[i] <- SKT$estimate[1]
skt_stats$p[i] <- SKT$p.value[2]
skt_stats$SennSlope[i] <- SKT$estimate[2]
skt_stats$SennIntercept[i] <- SKT$estimate[3]
skt_stats$ChiSquared[i] <- SKT$statistic[1]
skt_stats$pChiSquared[i] <- SKT$p.value[1]
# If the p value is less than 5% and the slope is greater than 10% of the
# median value, the trend is large (2).
if (skt_stats$p[i] < .05 & abs(skt_stats$SennSlope[i]) >
    abs(SK.T.med) / 10.) {
  skt_stats$Trend[i] <- 2

# If the p value is less than 5% and the slope is less than 10% of the
# median value, there is a trend (1).
} else if (skt_stats$p[i] < .05 & abs(skt_stats$SennSlope[i]) <
           abs(SK.T.med) / 10.) {
  skt_stats$Trend[i] <- 1

# Otherwise, there is no trend (0)
} else {
  skt_stats$Trend[i] <- 0
}
# Sets the sign of the trend based on Senn Slope direction
if (skt_stats$SennSlope[i] <= 0) {
  skt_stats$Trend[i] <- -skt_stats$Trend[i]
}
}
}

# Stores as data frame
skt_stats <- as.data.frame(skt_stats)

}

# Clears unused variables
rm(SK.T, data_SKT, x, SKT.med, SKT.minYr, SKT.maxYr, SKT.ind)
# Combines the skt_stats with Mon_Summ
skt_stats <- merge.data.frame(Mon_Summ, skt_stats,
                             by=c("MonitoringID"), all=TRUE)

skt_stats <- as.data.table(skt_stats[order(skt_stats$MonitoringID), ])

# Sets variables to proper format and rounds values if necessary
skt_stats$tau <- round(as.numeric(skt_stats$tau), digits=4)
skt_stats$p <- format(round(as.numeric(skt_stats$p), digits=4),
                      scientific=FALSE)
skt_stats$SennSlope <- as.numeric(skt_stats$SennSlope)
skt_stats$SennIntercept <- as.numeric(skt_stats$SennIntercept)
skt_stats$ChiSquared <- round(as.numeric(skt_stats$ChiSquared), digits=4)
skt_stats$pChiSquared <- round(as.numeric(skt_stats$pChiSquared), digits=4)
skt_stats$Trend <- as.integer(skt_stats$Trend)

# Writes combined statistics to file

```

```

fwrite(select(skt_stats, -c(MonitoringID, EarliestSampleDate)),
       paste0(out_dir_param, "/WC_Continuous_", param_abrev, "_", region,
              "_KendallTau_Stats.txt"),
       sep=" | ")

# Removes data rows with no ResultValue (created by merging with MA_All)
data <- data[!is.na(data$ResultValue),]

# Gets x and y values for starting point for trendline
KT.Plot <- skt_stats %>%
  group_by(MonitoringID) %>%
  summarize(x=decimal_date(EarliestSampleDate),
            y=(x-EarliestYear)*SennSlope+SennIntercept)
# Gets x and y values for ending point for trendline
KT.Plot2 <- skt_stats %>%
  group_by(MonitoringID) %>%
  summarize(x=decimal_date(LastSampleDate),
            y=(x-EarliestYear)*SennSlope+SennIntercept)
# Combines the starting and endpoints for plotting the trendline
KT.Plot <- bind_rows(KT.Plot, KT.Plot2)
rm(KT.Plot2)
KT.Plot <- as.data.table(KT.Plot[order(KT.Plot$MonitoringID), ])
KT.Plot <- KT.Plot[!is.na(KT.Plot$y),]

```

## Appendix I: Dataset Summary Box Plots

Box plots are created by using the entire data set and excludes any data that has been previously filtered out. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of TRUE
2. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the box plots
3. Set the plot type as a box plot with the size of the outlier points
4. Create the title, x-axis, y-axis, and color fill labels
5. Set the y and x limits
6. Make the axis labels bold
7. Plot the arrangement as a set of panels

This set of box plots are grouped by year.

```

# Defines standard plot theme: black and white, no major or minor grid lines,
# Arial font. Title is centered, size 12, and blue (hex coded). Subtitle is
# centered, size 10, and blue (hex coded). Legend title is size 10 and the
# legend is left-justified. X-axis title is size 10 and the margins are padded
# at the top and bottom to give more space for angled axis labels. Y-axis title
# is size 10 and margins are padded on the right side to give more space for
# axis labels. Axis labels are size 10 and the x-axis labels are rotated -45
# degrees with a horizontal justification that aligns them with the tick mark
plot_theme <- theme_bw() +
  theme(panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(),

```

```

text=element_text(family="Arial"),
plot.title=element_text(hjust=0.5, size=12, color="#314963"),
plot.subtitle=element_text(hjust=0.5, size=10, color="#314963"),
legend.title=element_text(size=10),
legend.text.align = 0,
axis.title.x = element_text(size=10, margin = margin(t = 5, r = 0,
                                                 b = 10, l = 0)),
axis.title.y = element_text(size=10, margin = margin(t = 0, r = 10,
                                                 b = 0, l = 0)),
axis.text=element_text(size=10),
axis.text.x=element_text(angle = 60, hjust = 1))
# Get minimum, mean, and standard deviation of the data
min_RV <- min(data$ResultValue[data$Include==TRUE])
mn_RV <- mean(data$ResultValue[data$Include==TRUE &
                                 data$ResultValue <
                                 quantile(data$ResultValue, 0.98)])
sd_RV <- sd(data$ResultValue[data$Include==TRUE &
                               data$ResultValue <
                               quantile(data$ResultValue, 0.98)])
# Sets y scale based on data
y_scale <- mn_RV + 4 * sd_RV

# Create plot object for auto-scaled y-axis plot
p1 <- ggplot(data=data[data$Include==TRUE], ),
  aes(x=SampleDate, y=ResultValue, group=Year)) +
  geom_boxplot(color="#333333", fill="#cccccc", outlier.shape=21,
               outlier.size=3, outlier.color="#333333",
               outlier.fill="#cccccc", outlier.alpha=0.75) +
  labs(subtitle="Autoscale", x="Year",
       y=paste0("Values (", unit, ")")) +
  plot_theme
# Create plot object for y-axis scaled plot
p2 <- ggplot(data=data[data$Include==TRUE], ,
  aes(x=SampleDate, y=ResultValue, group=Year)) +
  geom_boxplot(color="#333333", fill="#cccccc", outlier.shape=21,
               outlier.size=3, outlier.color="#333333",
               outlier.fill="#cccccc", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation", x="Year",
       y=paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  plot_theme
# Create plot object for y-axis scaled plot for past 10 years
p3 <- ggplot(data=data[data$Include==TRUE], ,
  aes(x=Year, y=ResultValue, group=Year)) +
  geom_boxplot(color="#333333", fill="#cccccc", outlier.shape=21,
               outlier.size=3, outlier.color="#333333",
               outlier.fill="#cccccc", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation, Last 10 Years",
       x="Year", y=paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits=c(max(data$Year) - 10.5, max(data$Year)+0.5),
                     breaks=seq(max(data$Year) - 10, max(data$Year), 2)) +
  plot_theme

```

```

# Arrange plot objects
set <- ggarrange(p1, p2, p3, ncol=1)

# Create title object for plots
p0 <- ggplot() + labs(title="Summary Box Plots for Entire Data",
                      subtitle="By Year") + plot_theme +
  theme(panel.border=element_blank(), panel.grid.major=element_blank(),
        panel.grid.minor=element_blank(), axis.line=element_blank())

# Arrange title on plots
Yset <- ggarrange(p0, set, ncol=1, heights=c(0.07, 1))

```

This set of box plots are grouped by year and month with the color being related to the month.

```

# Create plot object for auto-scaled y-axis plot
p1 <- ggplot(data=data[data$Include==TRUE, ],
              aes(x=YearMonthDec, y=ResultValue,
                  group=YearMonth, color=as.factor(Month))) +
  geom_boxplot(fill="#cccccc", outlier.size=1.5, outlier.alpha=0.75) +
  labs(subtitle="Autoscale", x="Year",
       y=paste0("Values (", unit, ")"), color="Month") +
  plot_theme +
  theme(legend.position="top", legend.box="horizontal") +
  guides(color=guide_legend(nrow=1))

# Create plot object for y-axis scaled plot
p2 <- ggplot(data=data[data$Include==TRUE, ],
              aes(x=YearMonthDec, y=ResultValue,
                  group=YearMonth, color=as.factor(Month))) +
  geom_boxplot(fill="#cccccc", outlier.size=1.5, outlier.alpha=0.75) +
  labs(subtitle="Scaled to 5x Standard Deviation",
       x="Year", y=paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  plot_theme +
  theme(legend.position="none")

# Create plot object for y-axis scaled plot for past 10 years
p3 <- ggplot(data=data[data$Include==TRUE, ],
              aes(x=YearMonthDec, y=ResultValue,
                  group=YearMonth, color=as.factor(Month))) +
  geom_boxplot(fill="#cccccc", outlier.size=1.5, outlier.alpha=0.75) +
  labs(subtitle="Scaled to 5x Standard Deviation, Last 10 Years",
       x="Year", y=paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits=c(max(data$Year) - 10.5, max(data$Year)+0.5),
                     breaks=seq(max(data$Year) - 10, max(data$Year), 2)) +
  plot_theme +
  theme(legend.position="none")

# Create legend item
leg <- get_legend(p1)

# Arrange plots and legend
set <- ggarrange(leg, p1 + theme(legend.position="none"), p2, p3, ncol=1,
                 heights=c(0.1, 1, 1, 1))

# Create plot title object
p0 <- ggplot() + labs(title="Summary Box Plots for Entire Data",

```

```

        subtitle="By Year & Month") + plot_theme +
theme(panel.border=element_blank(), panel.grid.major=element_blank(),
      panel.grid.minor=element_blank(), axis.line=element_blank())
# Arrange plots and title
YMset <- ggarrange(p0, set, ncol=1, heights=c(0.07, 1))

```

The following box plots are grouped by month with fill color being related to the month. This is designed to view potential seasonal trends.

```


# Create plot object for auto-scaled y-axis plot
p1 <- ggplot(data=data[data$Include==TRUE, ],
              aes(x=Month, y=ResultValue,
                  group=Month, fill=as.factor(Month))) +
  geom_boxplot(color="#333333", outlier.shape=21, outlier.size=3,
               outlier.color="#333333", outlier.alpha=0.75) +
  labs(subtitle="Autoscale", x="Month",
       y=paste0("Values (", unit, ")"), fill="Month") +
  scale_x_continuous(limits=c(0, 13), breaks=seq(3, 12, 3)) +
  plot_theme +
  theme(legend.position="top", legend.box="horizontal") +
  guides(fill=guide_legend(nrow=1))
# Create plot object for y-axis scaled plot
p2 <- ggplot(data=data[data$Include==TRUE, ],
              aes(x=Month, y=ResultValue,
                  group=Month, fill=as.factor(Month))) +
  geom_boxplot(color="#333333", outlier.shape=21, outlier.size=3,
               outlier.color="#333333", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 5x Standard Deviation",
       x="Month", y=paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits=c(0, 13), breaks=seq(3, 12, 3)) +
  plot_theme +
  theme(legend.position="none")
# Create plot object for y-axis scaled plot for past 10 years
p3 <- ggplot(data=data[data$Include==TRUE &
                           data$Year >= max(data$Year) - 10, ],
              aes(x=Month, y=ResultValue,
                  group=Month, fill=as.factor(Month))) +
  geom_boxplot(color="#333333", outlier.shape=21, outlier.size=3,
               outlier.color="#333333", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 5x Standard Deviation, Last 10 Years",
       x="Month", y=paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits=c(0, 13), breaks=seq(3, 12, 3)) +
  plot_theme +
  theme(legend.position="none")
# Create legend object
leg <- get_legend(p1)
# Arrange plots and legend
set <- ggarrange(leg, p1 + theme(legend.position="none"), p2, p3, ncol=1,
                 heights=c(0.1, 1, 1, 1))
# Create title object for plots
p0 <- ggplot() + labs(title="Summary Box Plots for Entire Data",

```


```


    subtitle="By Month") + plot_theme +
  theme(panel.border=element_blank(), panel.grid.major=element_blank(),
        panel.grid.minor=element_blank(), axis.line=element_blank())
# Arrange plots and title
Mset <- ggarrange(p0, set, ncol=1, heights=c(0.07, 1))

```

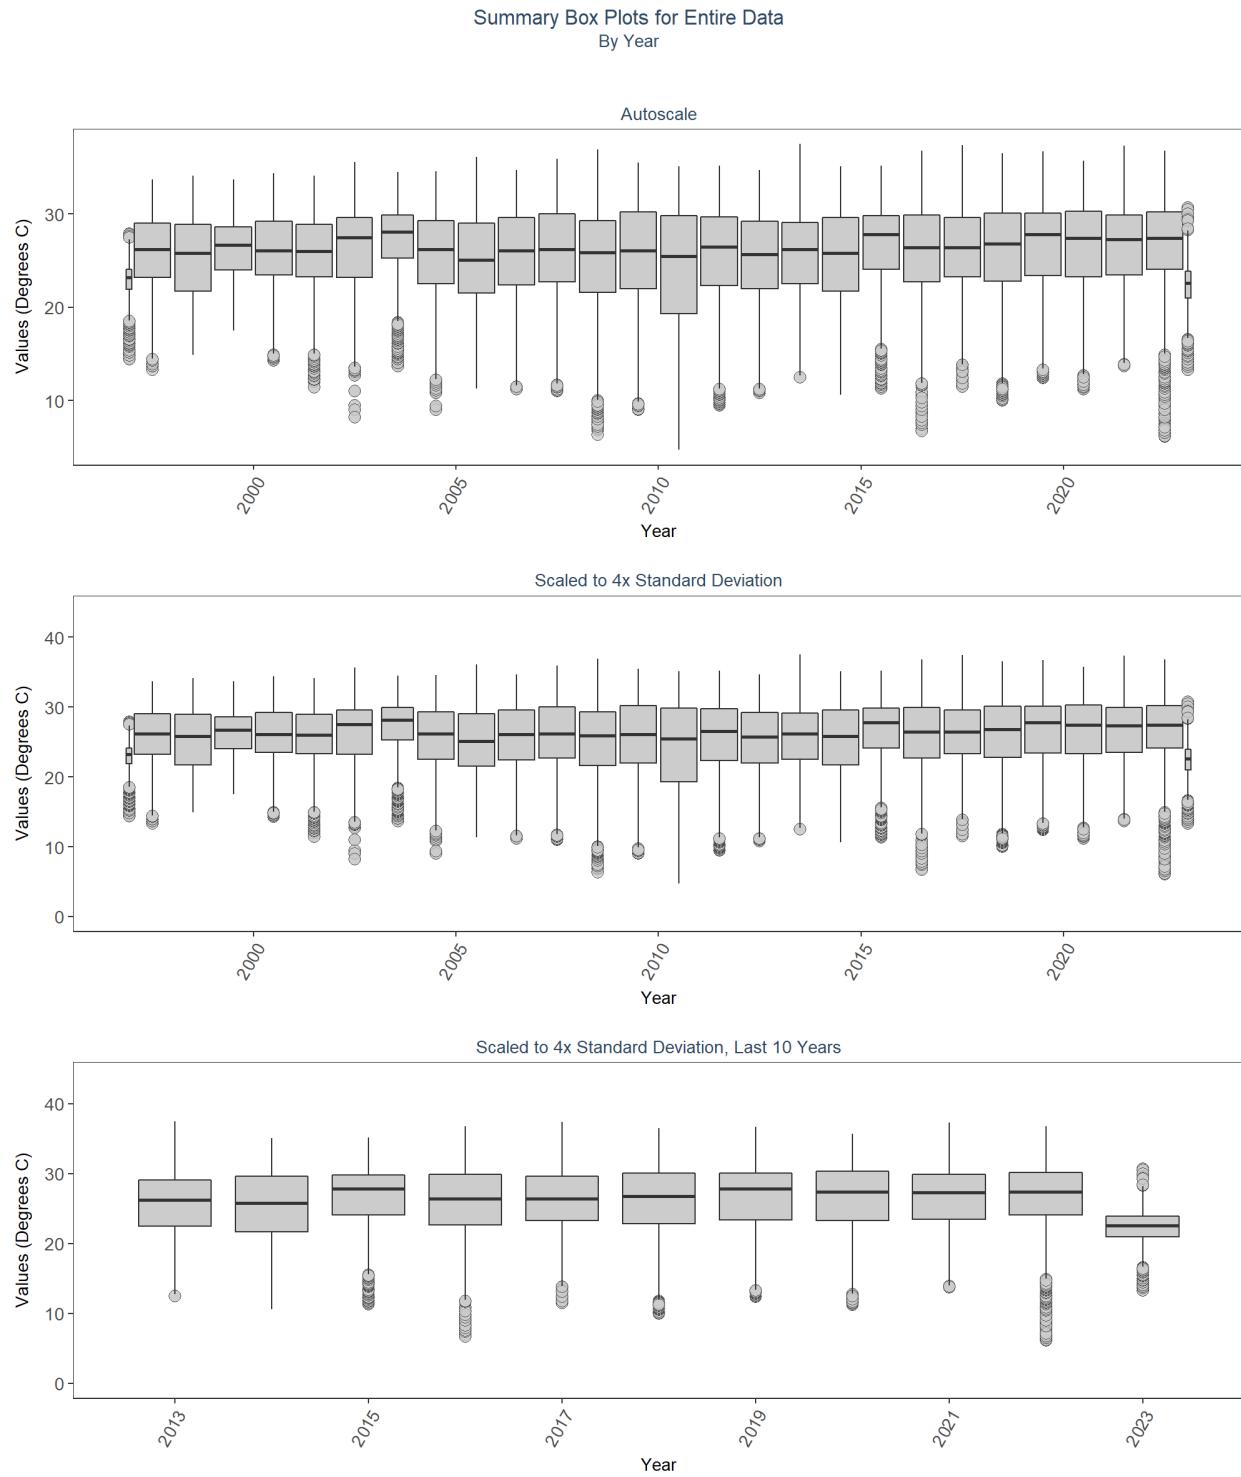

Summary Box Plots for Entire Data  
By Year & Month

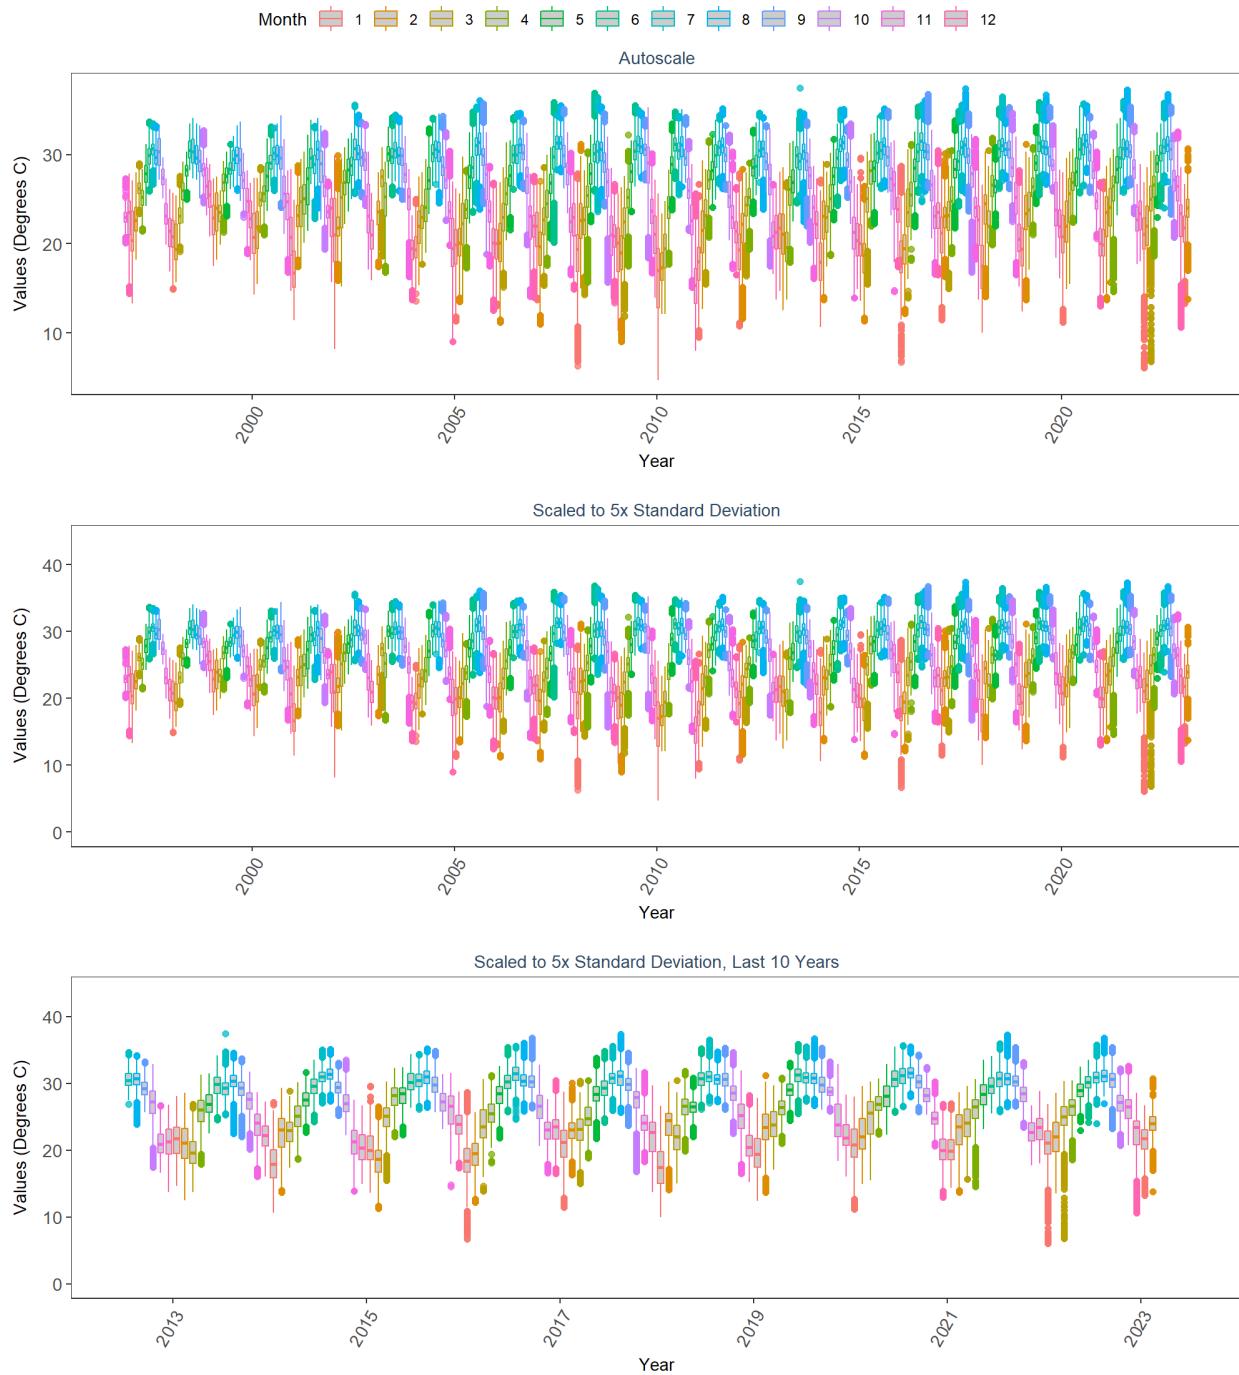

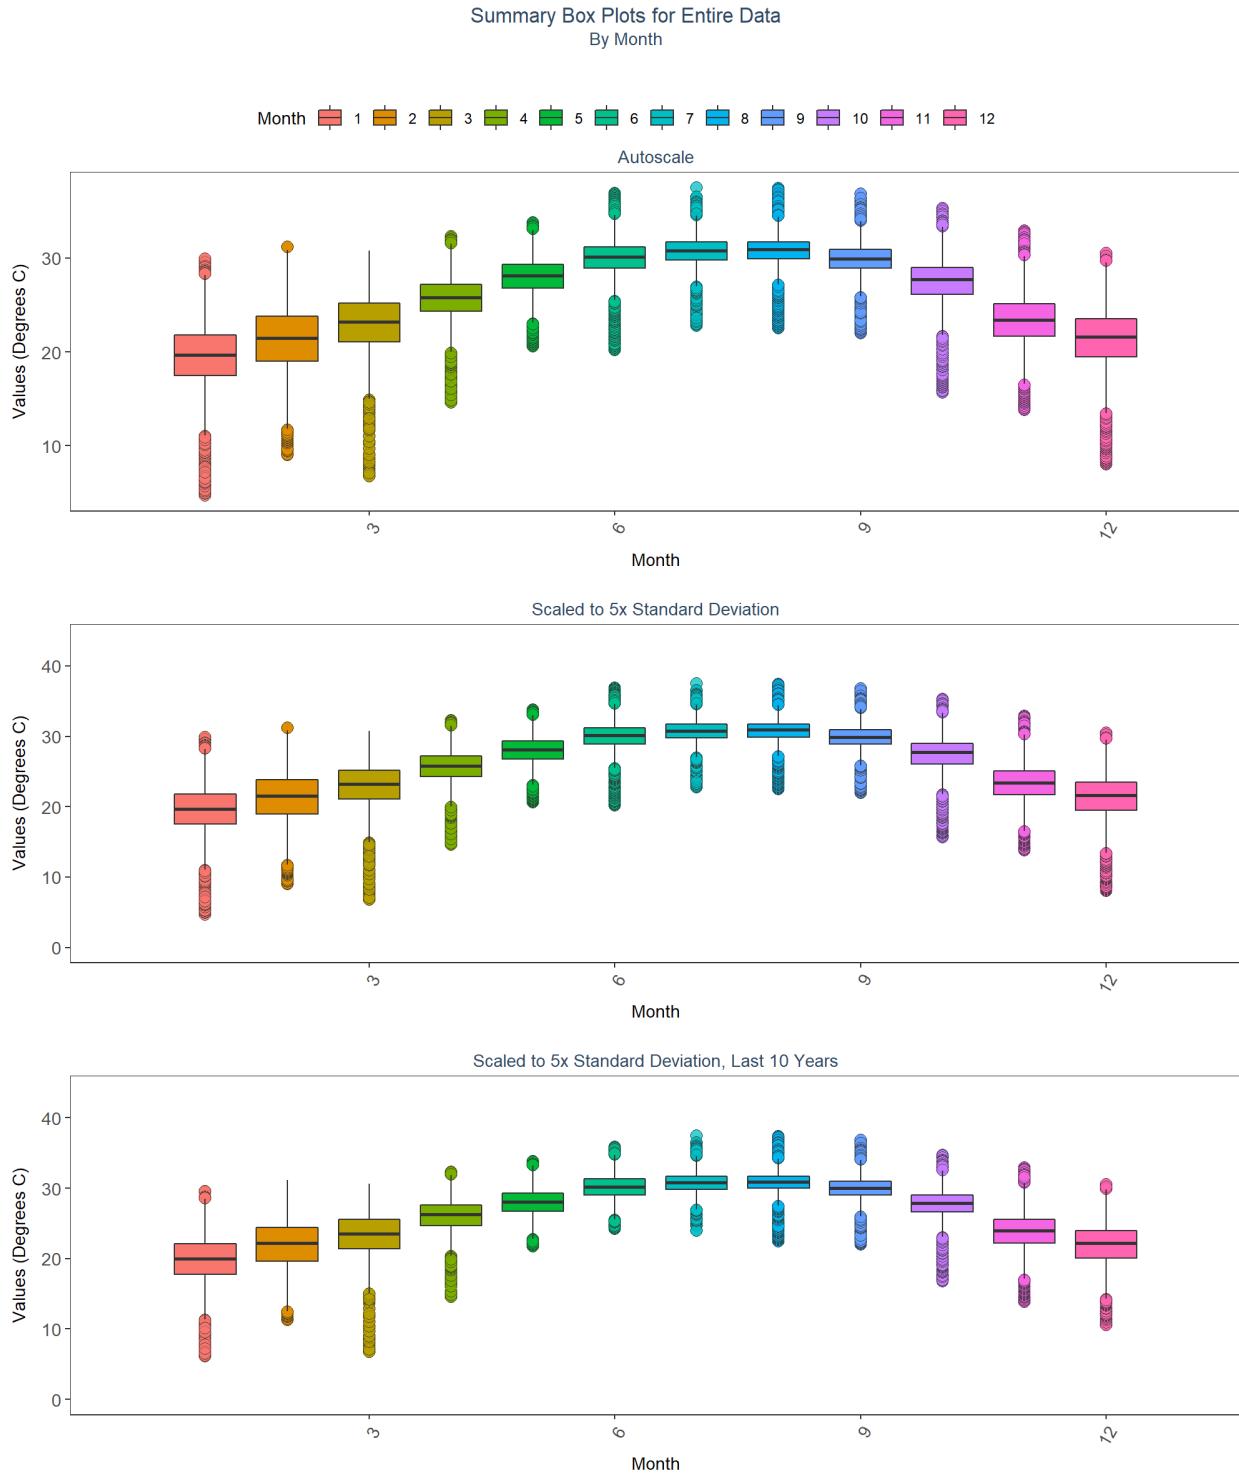

## Appendix II: Monitoring Location Trendlines

The plots created in this section are designed to show the general trend of the data. Data is taken and grouped by **MonitoringID**. The trendlines on the plots are created using the Senn slope and intercept from

the seasonal Kendall Tau analysis. The scripts that create plots follow this format

1. Use the averages that have been aggregated by year and month for the desired monitoring location
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the x-axis scale
4. Set the plot type as a line and point plot with the specifics of each
5. Add the linear trend determined from the seasonal Kendall Tau slope and intercept
6. Create the title, x-axis, y-axis, and labels
7. Set the y and x limits
8. Apply the plot theme
9. Set the SKT analysis results as a table figure
10. Combine the plot and table to be displayed together

```
# Determines whether analyzed monitoring locations exist. If they do, begins
# looping through them
if(n==0){
  print("There are no monitoring locations that qualify.")
} else {
  # Begins looping through each monitoring location
  for (i in 1:n) {
    # Gets data to be used in plot for monitoring location
    plot_data <- Mon_YM_Stats[Mon_YM_Stats$MonitoringID==Mon_IDs[i],]
    # Gets trendline data for monitoring location
    KT.plot_data <- KT.Plot[KT.Plot$MonitoringID==Mon_IDs[i],]
    #Determine max and min time (Year) for plot x-axis
    t_min <- min(plot_data$Year)
    t_max <- max(plot_data$YearMonthDec)
    t_max_brk <- as.integer(round(t_max, 0))
    t <- t_max-t_min
    min_RV <- min(plot_data$Mean)
    # Creates break intervals for plots based on number of years of data
    if(t>=30){
      # Set breaks to every 10 years if more than 30 years of data
      brk <- -10
    }else if(t<30 & t>=10){
      # Set breaks to every 5 years if between 30 and 10 years of data
      brk <- -5
    }else if(t<10 & t>=4){
      # Set breaks to every 2 years if between 10 and 4 years of data
      brk <- -2
    }else if(t<4 & t>=2){
      # Set breaks to every year if between 4 and 2 years of data
      brk <- -1
    }else if(t<2){
      # Set breaks to every year if less than 2 years of data
      brk <- -1
      # Sets t_max to be 1 year greater and t_min to be 1 year lower
      # Forces graph to have at least 3 tick marks
      t_max <- t_max+1
      t_min <- t_min-1
    }
    # Get name of managed area
    MA_name <- skt_stats$ManagedAreaName[skt_stats$MonitoringID==Mon_IDs[i]]
    # Get program location name
```

```

Mon_name <- paste0(skt_stats$ProgramID[skt_stats$MonitoringID==Mon_IDs[i]], 
  "\n", skt_stats$ProgramName[skt_stats$MonitoringID==Mon_IDs[i]], "\n",
  skt_stats$ProgramLocationID[skt_stats$MonitoringID==Mon_IDs[i]])

# Create plot object with data and trendline
p1 <- ggplot(data=plot_data,
  aes(x=YearMonthDec, y=Mean)) +
  geom_line(size=0.75, color="#333333", alpha=0.6) +
  geom_point(shape=21, size=3, color="#333333", fill="#cccccc",
    alpha=0.75) +
  geom_line(data=KT.plot_data, aes(x=x, y=y),
    color="#000099", size=1.2, alpha=0.7) +
  labs(title=paste0(MA_name, "\n", Mon_name),
    subtitle=parameter,
    x="Year", y=paste0("Values (", unit, ")")) +
  scale_x_continuous(limits=c(t_min-0.25, t_max+0.25),
    breaks=seq(t_max_brk, t_min, brk)) +
  plot_theme

# Creates ResultTable to display statistics below plot
ResultTable <- skt_stats[skt_stats$MonitoringID==Mon_IDs[i], ] %>%
  select(RelativeDepth, N_Data, N_Years, Median, Independent, tau, p,
    SennSlope, SennIntercept, ChiSquared, pChiSquared, Trend)

# Create table object
t1 <- ggtexttable(ResultTable, rows=NULL,
  theme=ttheme(base_size=10)) %>%
  tab_add_footnote(text="p < 0.00005 appear as 0 due to rounding.\n
    SennIntercept is intercept value at beginning of
    record for monitoring location",
    size=10, face="italic")

# Arrange and display plot and statistic table
print(ggarrange(p1, t1, ncol=1, heights=c(0.85, 0.15)))
# Add extra space at the end to prevent the next figure from being too
# close. Does not add space after last plot
if(i!=n){
  cat("\n \n \n")
}
rm(plot_data)
rm(KTset, leg)
rm(plot_data)
rm(KTset, leg)
}

}

```


Cape Romano-Ten Thousand Islands Aquatic Preserve

7

National Water Information System

255123081321300

Water Temperature

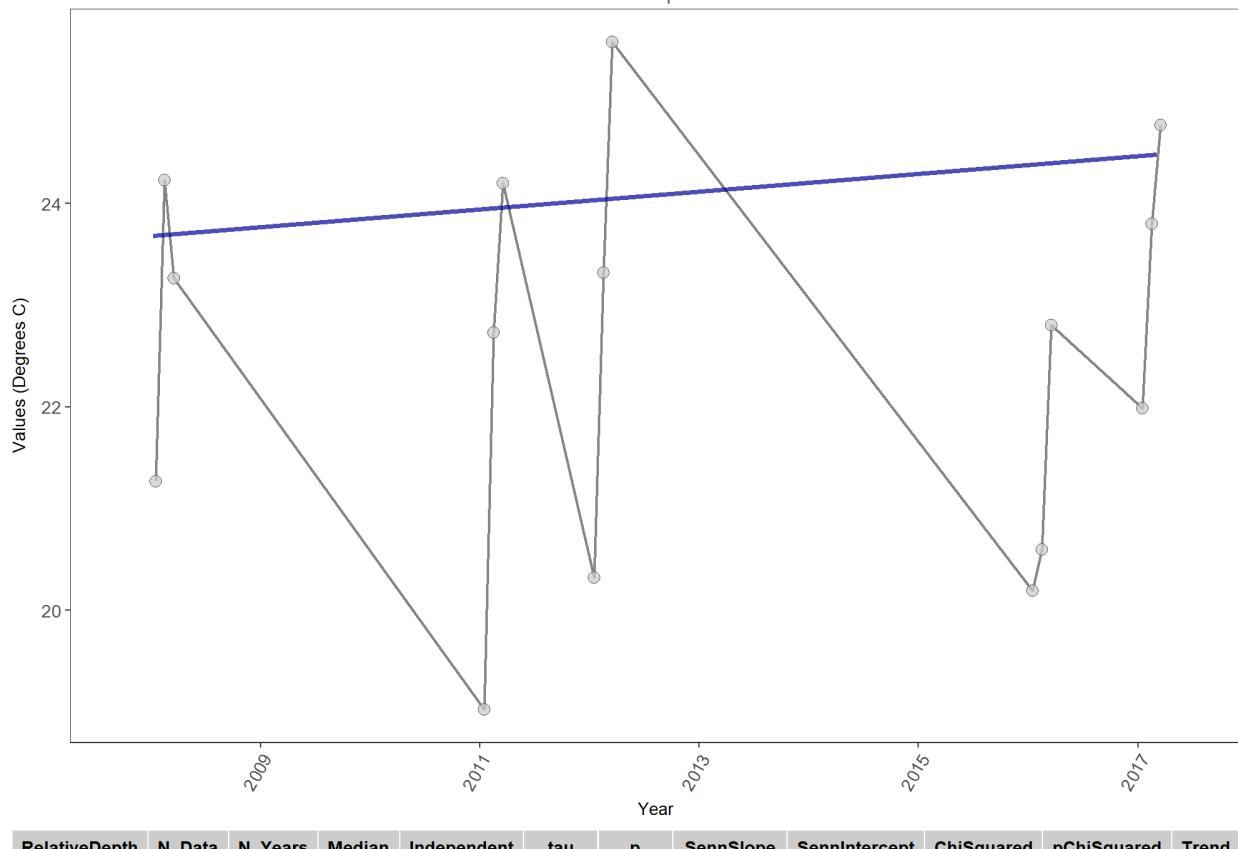


$p < 0.00005$  appear as 0 due to rounding.

SennIntercept is intercept value at beginning of record for monitoring location

Cape Romano-Ten Thousand Islands Aquatic Preserve

7

National Water Information System  
255432081303900  
Water Temperature

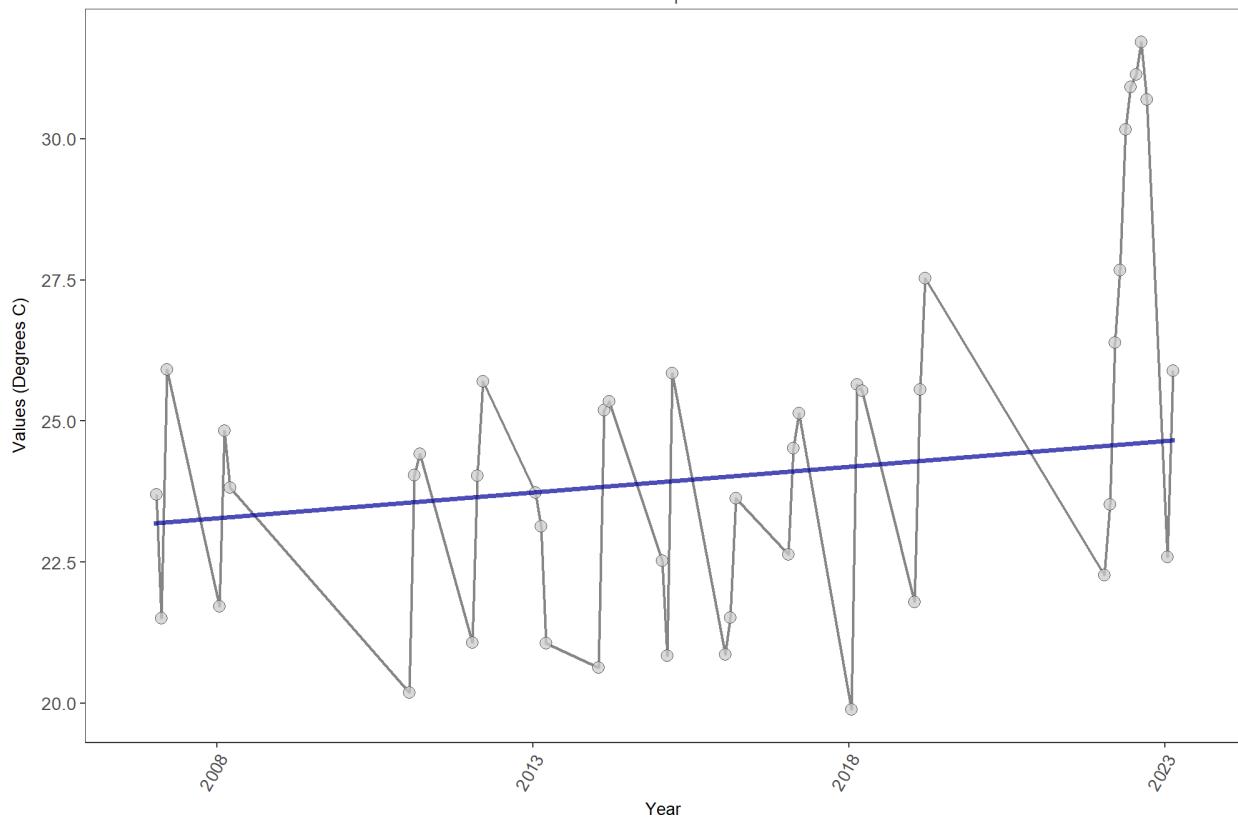


$p < 0.00005$  appear as 0 due to rounding.

SennIntercept is intercept value at beginning of record for monitoring location

Cape Romano-Ten Thousand Islands Aquatic Preserve

7

National Water Information System  
255534081324000  
Water Temperature

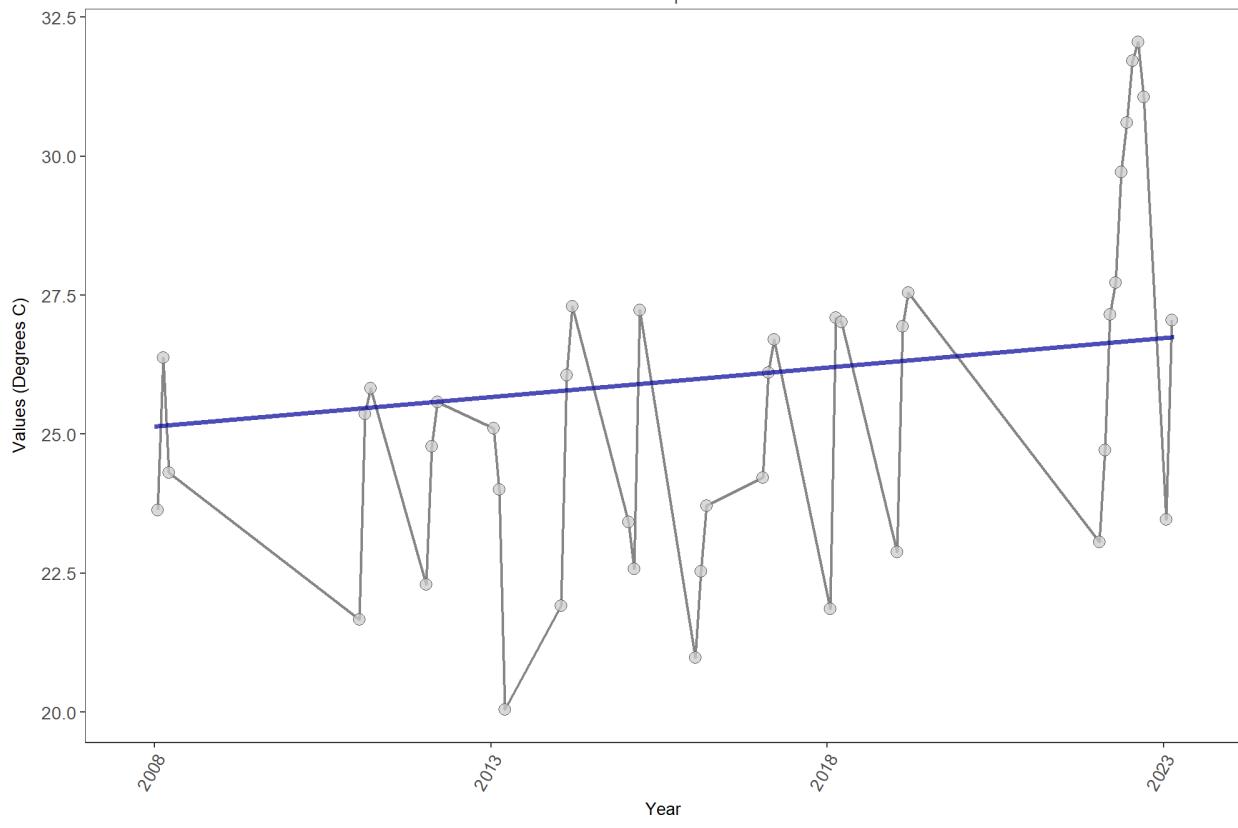

RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
surface	1081	12	25.3	TRUE	0.1927	0.1617	0.1064516	25.13667	0.9737	0.6145	0


*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Cape Romano-Ten Thousand Islands Aquatic Preserve

7


National Water Information System  
255654081350200  
Water Temperature

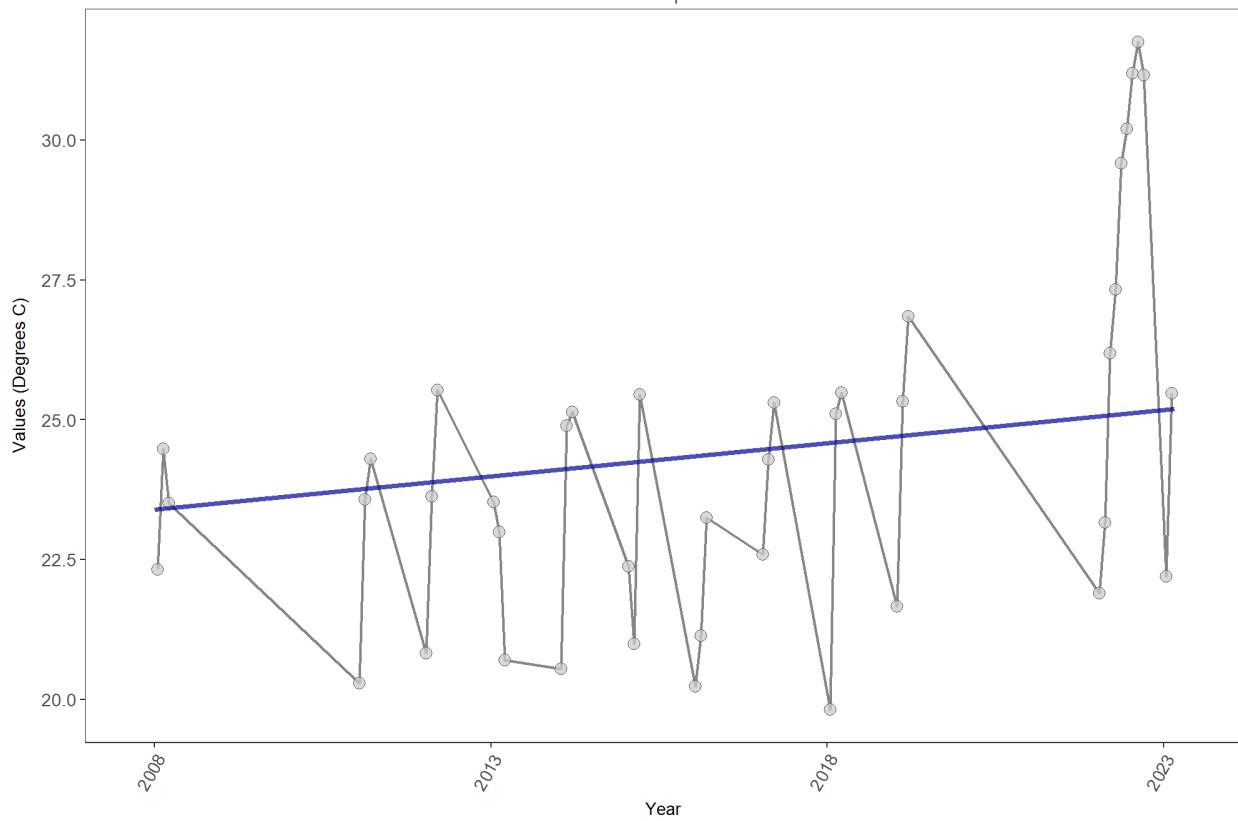

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbfwq  
 Water Temperature

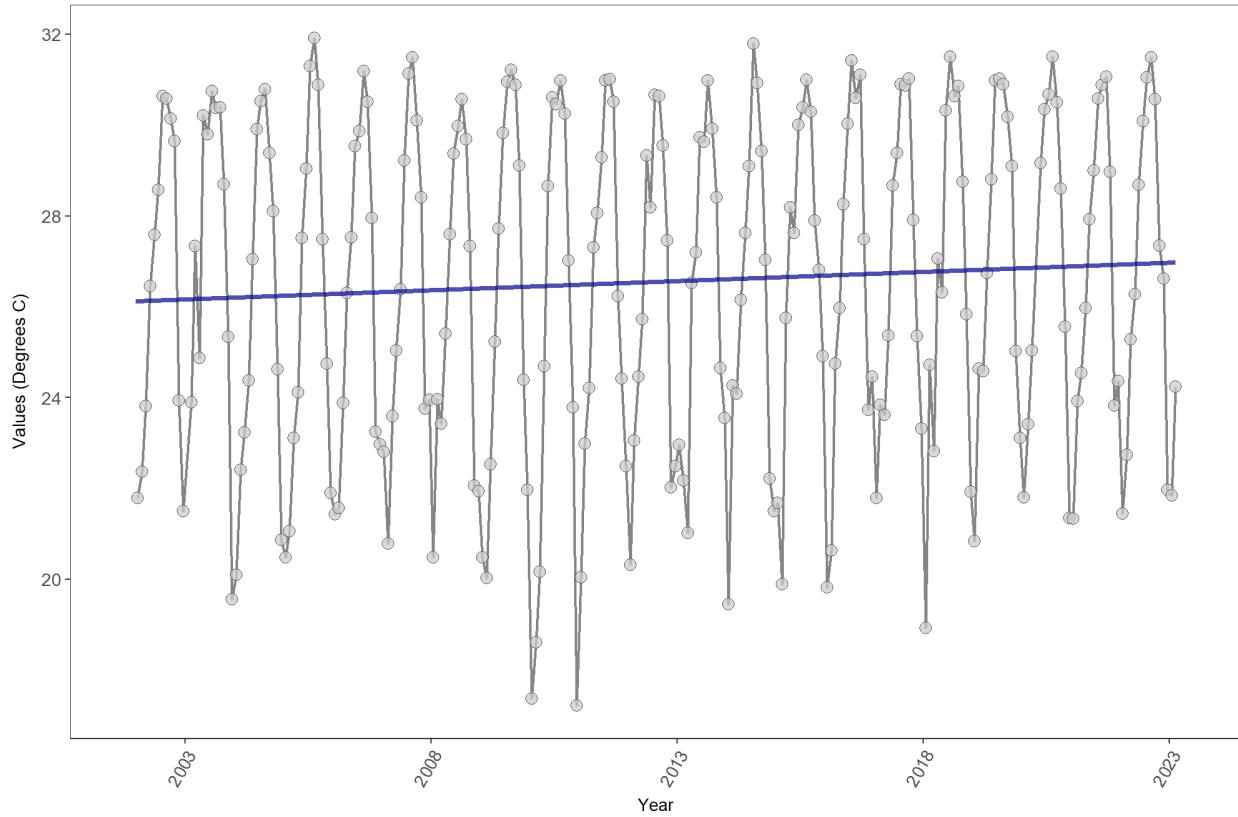


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	617400	22	26.9	TRUE	0.207	0.0000	0.0399503	26.12962	4.6389	0.9474	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 Water Temperature

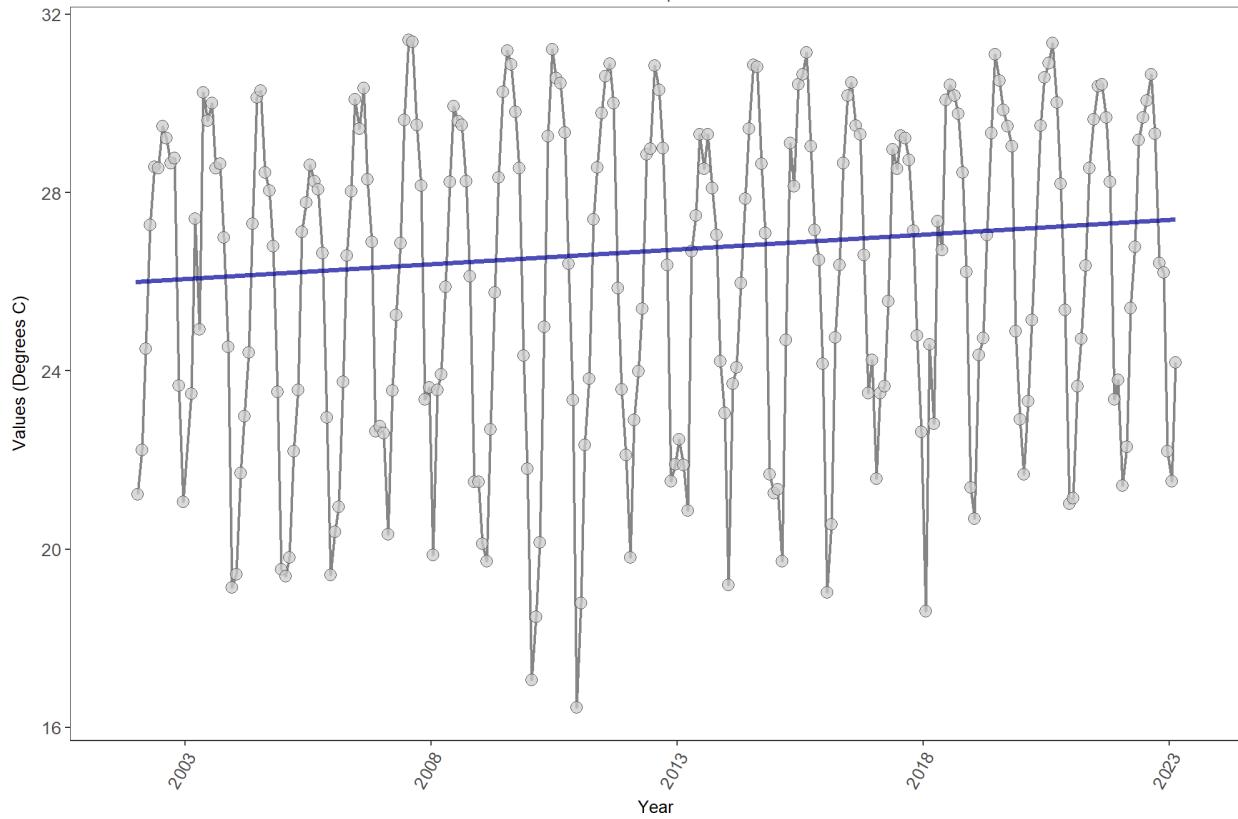


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	628216	22	26.9	TRUE	0.2457	0.0000	0.06654927	25.99832	3.0617	0.9899	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkmbwq  
 Water Temperature

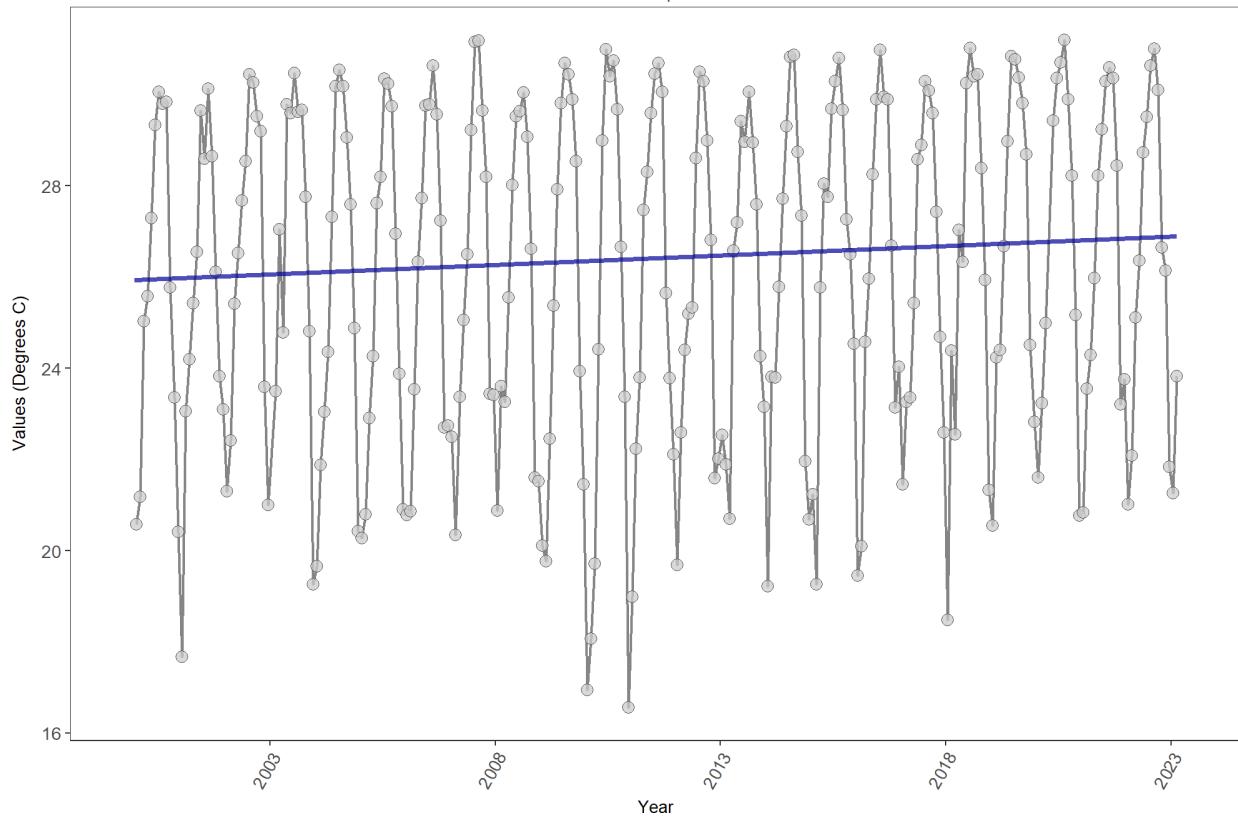


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	659894	24	26.8	TRUE	0.2279	0.0000	0.04149081	25.92818	3.7408	0.9769	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbpbwq  
 Water Temperature

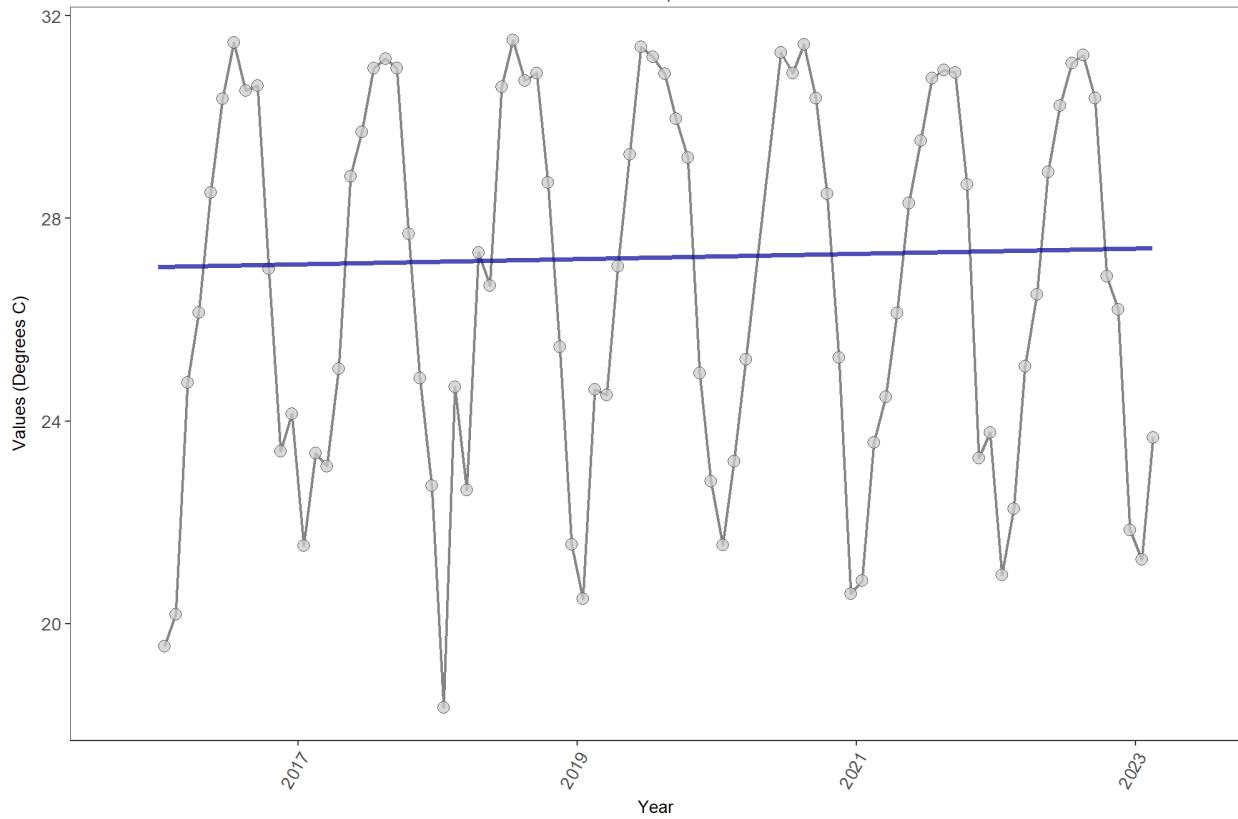


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	236179	8	27.3	TRUE	0.0837	0.3670	0.05168587	27.0457	8.1622	0.6987	0

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB01  
 Water Temperature

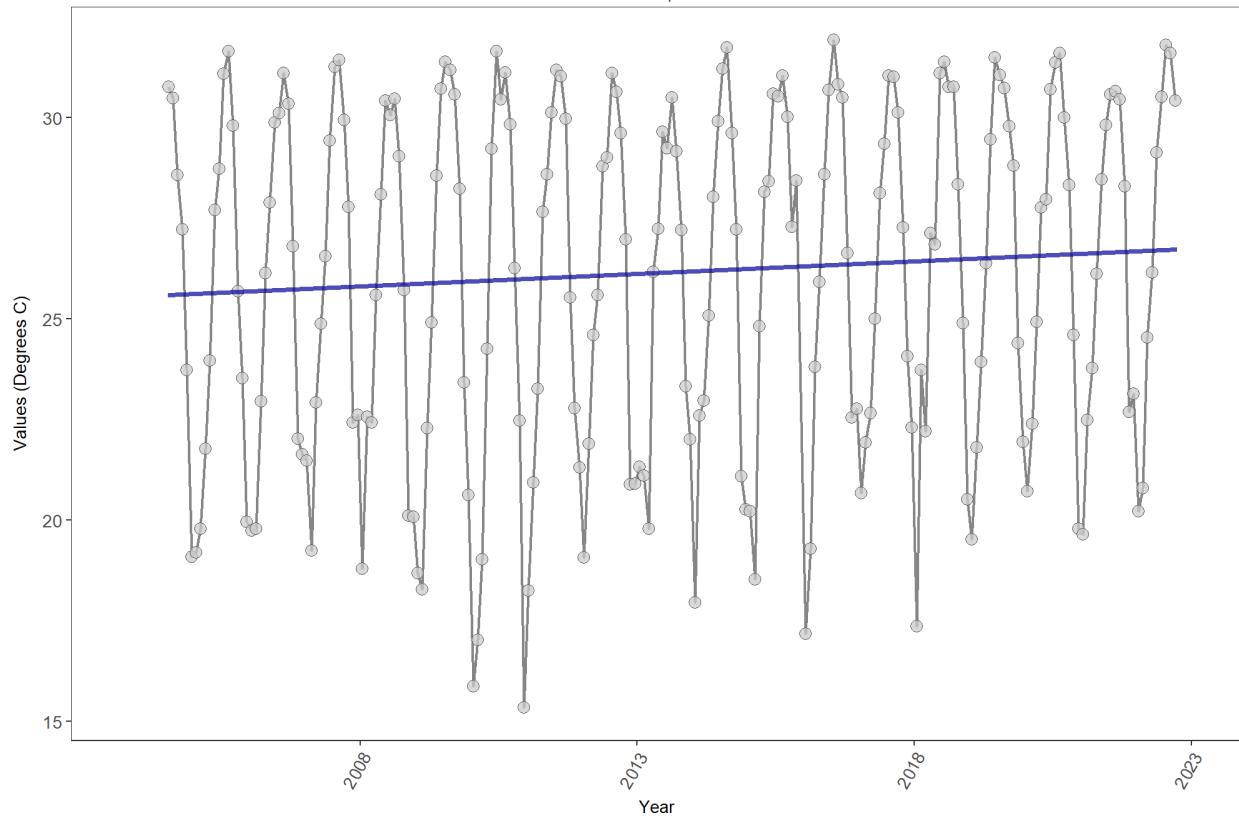


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	616625	19	26.8	TRUE	0.2539	0.0000	0.06213652	25.56719	6.9882	0.8	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB02  
 Water Temperature

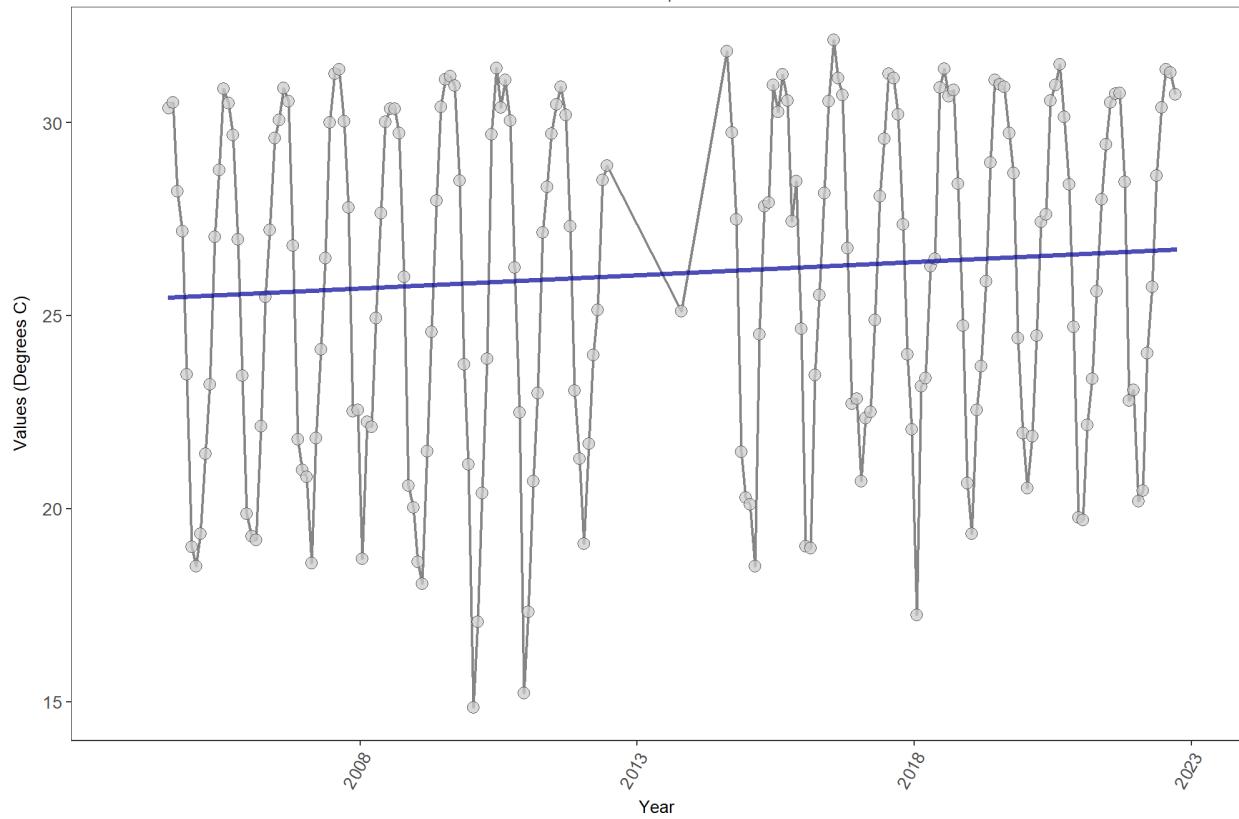


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	539688	19	26.6	TRUE	0.3158	0.0000	0.06842195	25.43307	2.4759	0.996	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB03  
 Water Temperature

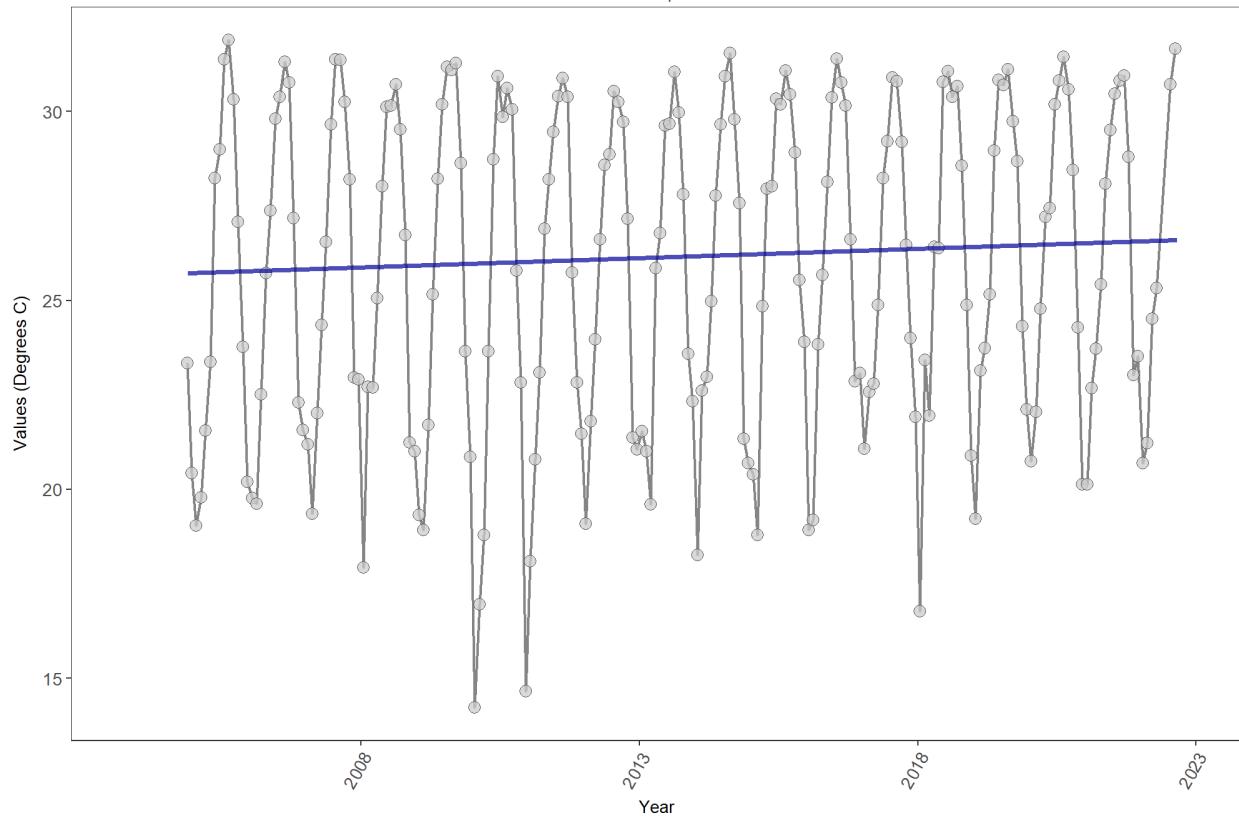


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	572084	19	26.5	TRUE	0.1722	0.0006	0.04927919	25.67835	7.636	0.7455	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP1A  
 Water Temperature

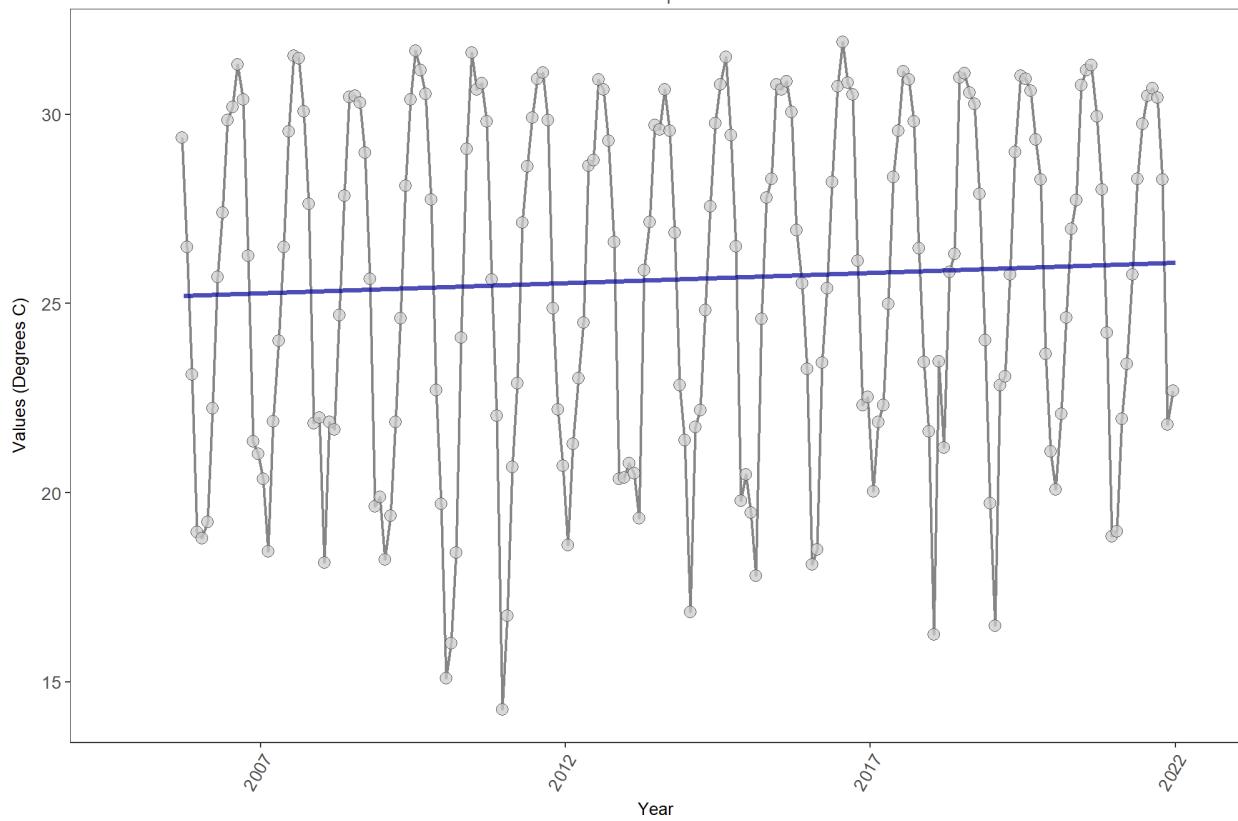


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	551533	17	26.3	TRUE	0.2063	0.0001	0.05442124	25.15933	11.5975	0.3946	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP2B  
 Water Temperature

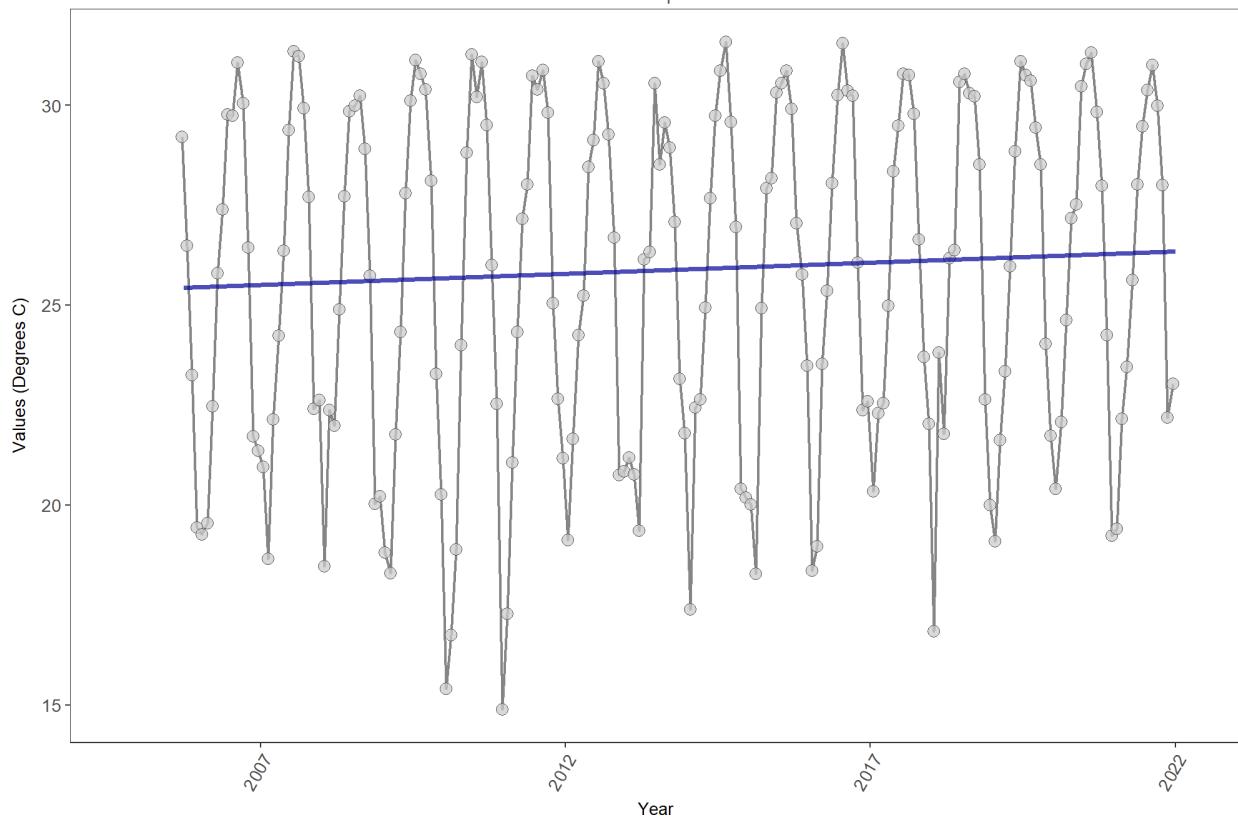


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	548093	17	26.1	TRUE	0.1814	0.0006	0.05562451	25.39354	4.8191	0.9396	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP3C  
 Water Temperature

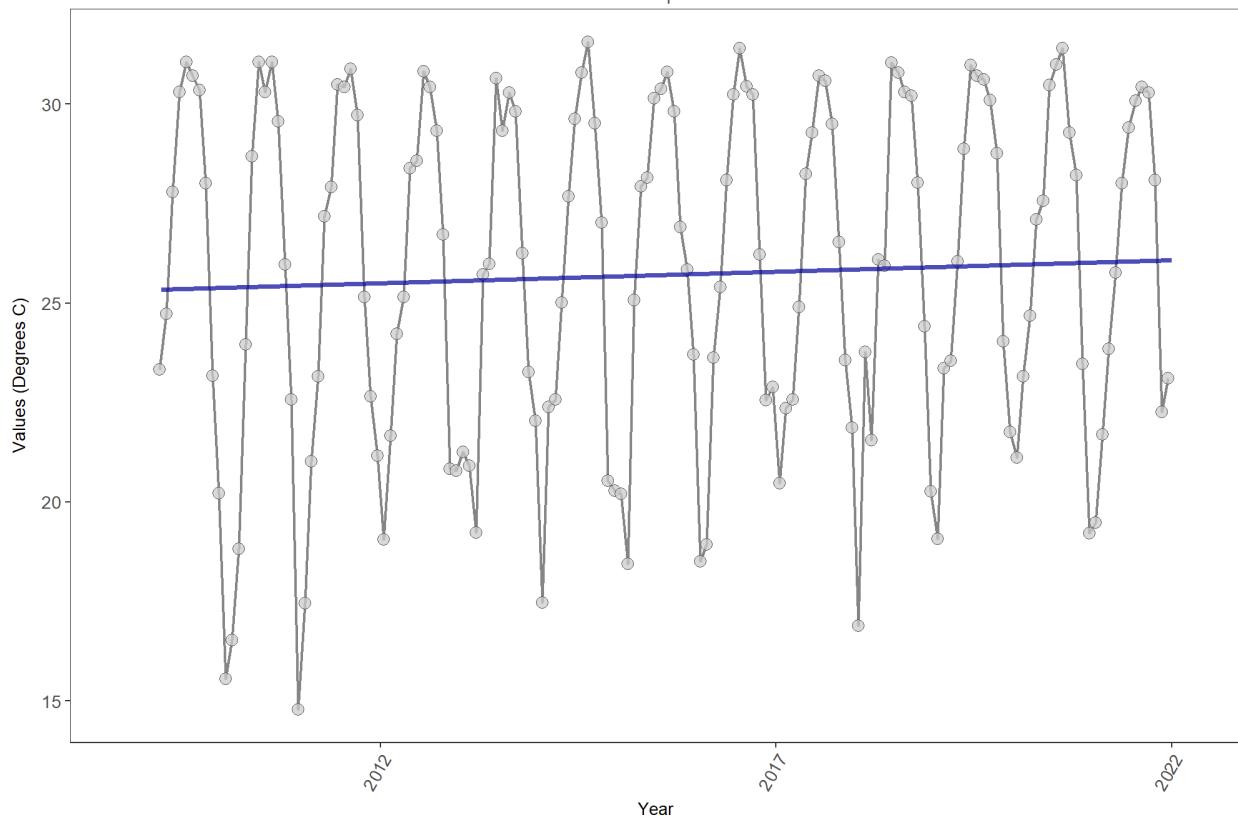


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	422786	13	26.5	TRUE	0.1543	0.0141	0.05807679	25.32711	9.9645	0.5336	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Pinellas County Aquatic Preserve  
5  
National Data Buoy Center  
CWBF1  
Water Temperature

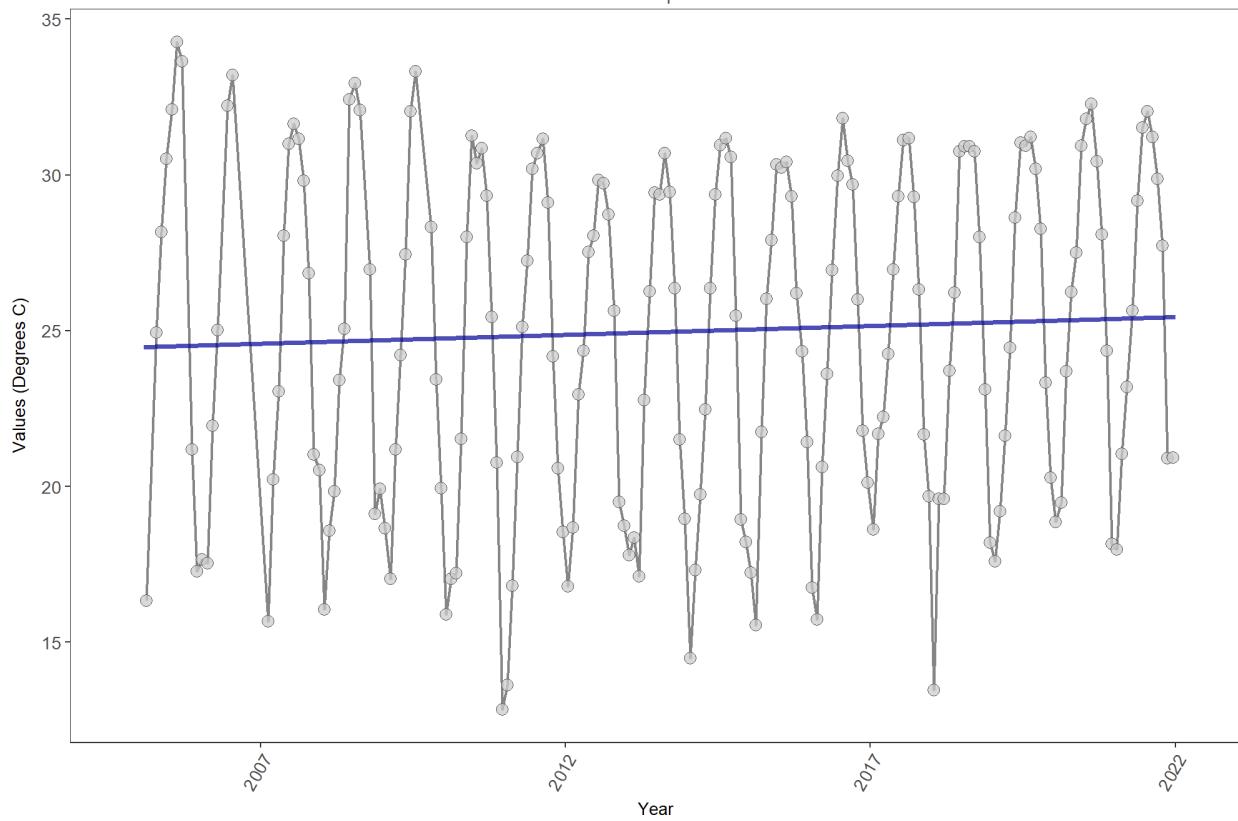


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
surface	1162374	17	25.2	TRUE	0.1358	0.0128	0.05701617	24.4769	8.4799	0.6698	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbhwq  
 Water Temperature

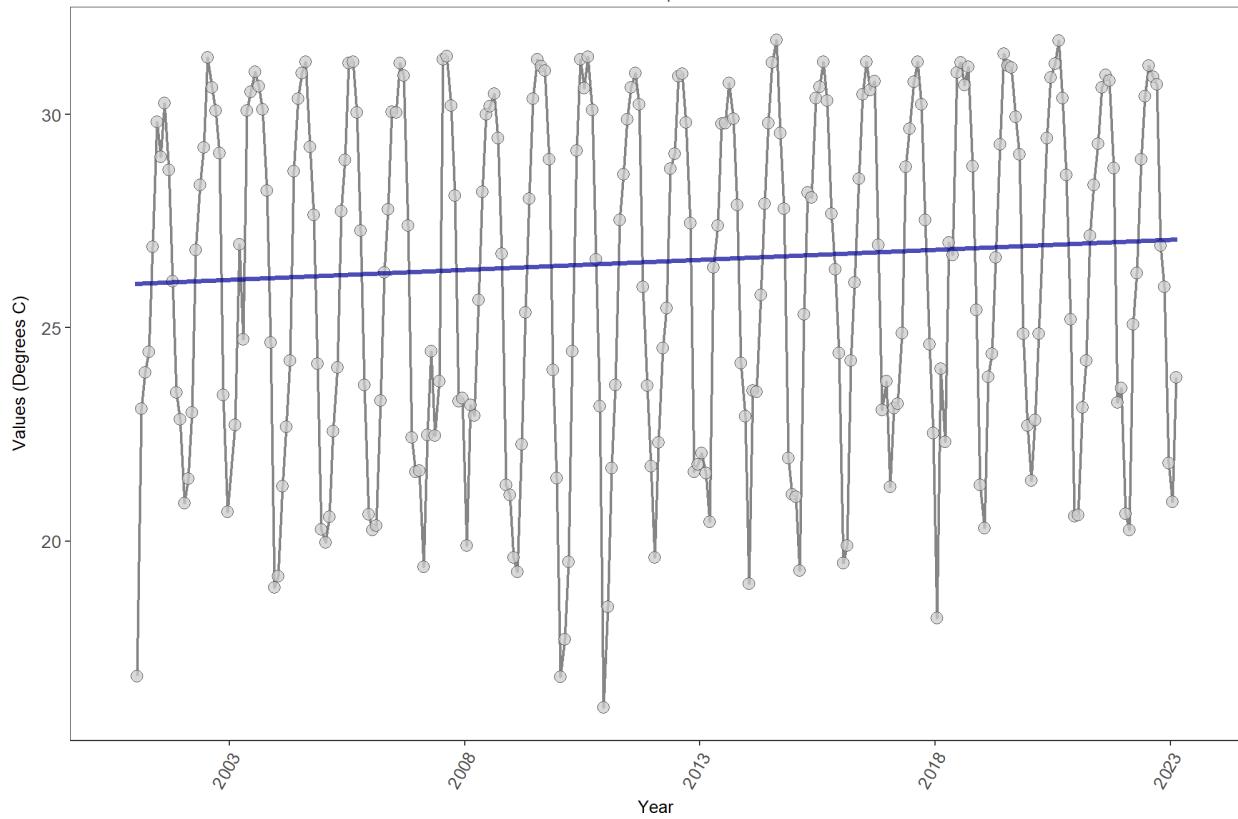

RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	637072	23	26.8	TRUE	0.2124	0.0000	0.04698165	26.02916	4.3444	0.9587	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*


Rookery Bay National Estuarine Research Reserve

7

National Water Information System

255123081321300

Water Temperature

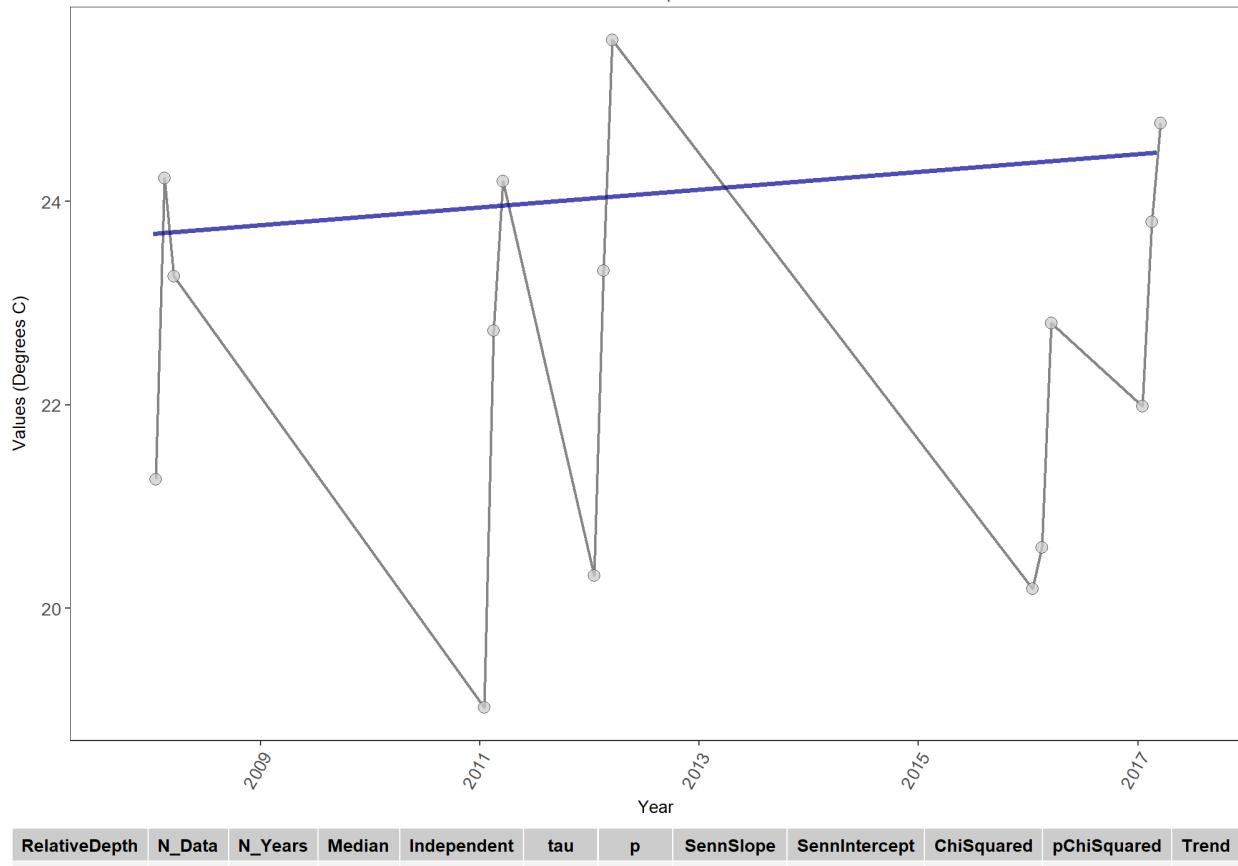

RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
surface	320	5	22.2	TRUE	0.0667	0.8875	0.08732663	23.67778	0.64	0.7261	0

$p < 0.00005$  appear as 0 due to rounding.

SennIntercept is intercept value at beginning of record for monitoring location


Rookery Bay National Estuarine Research Reserve

7

National Water Information System

255432081303900

Water Temperature

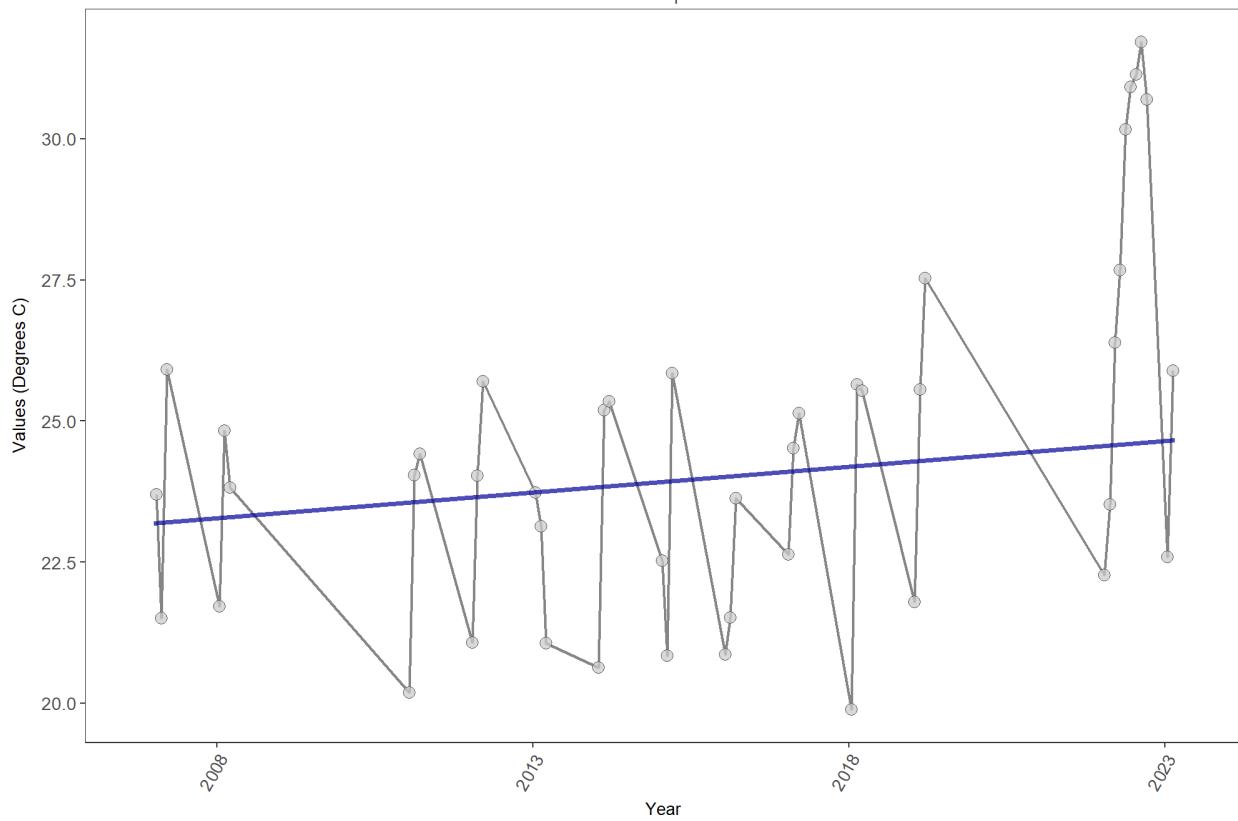

RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
surface	1123	13	23.9	TRUE	0.2002	0.1164	0.09063424	23.19318	1.0305	0.5973	0


$p < 0.00005$  appear as 0 due to rounding.

SennIntercept is intercept value at beginning of record for monitoring location

Rookery Bay National Estuarine Research Reserve

7

National Water Information System  
255534081324000  
Water Temperature

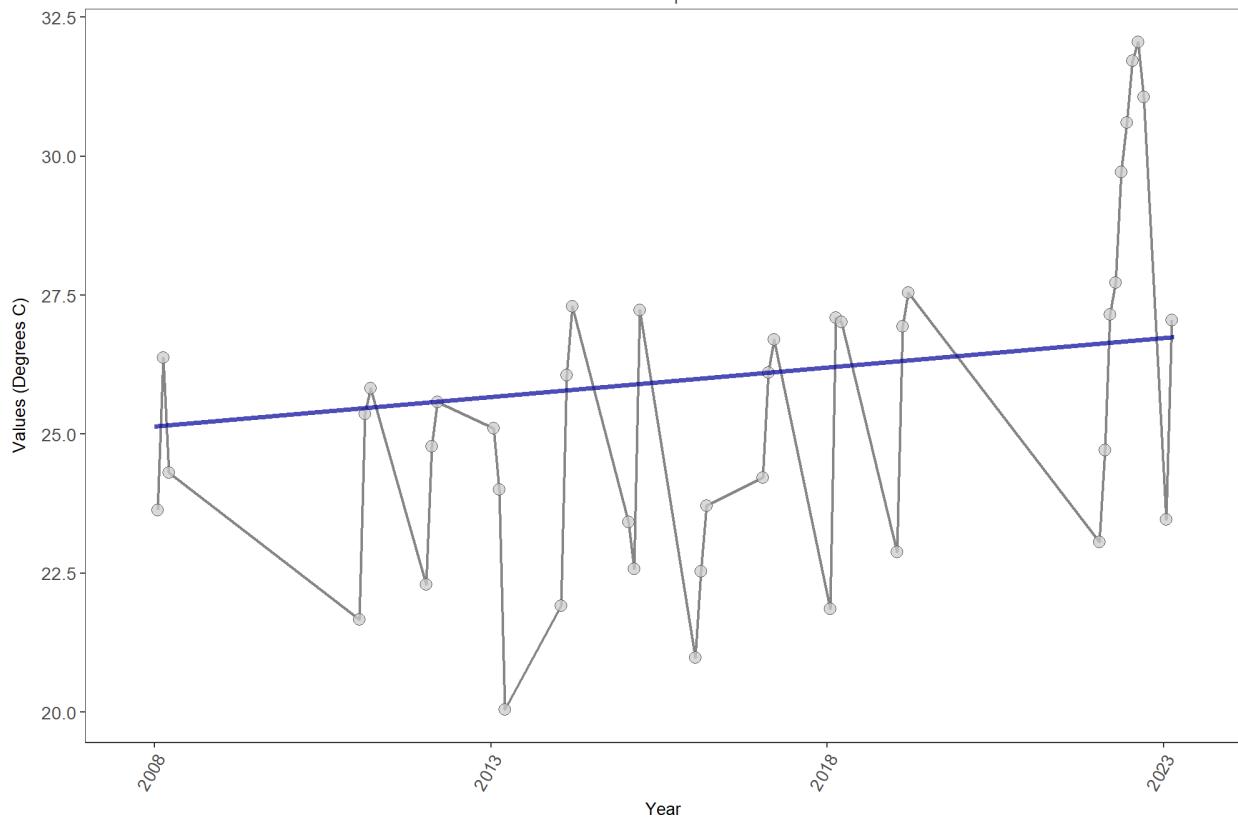

RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
surface	1081	12	25.3	TRUE	0.1927	0.1617	0.1064516	25.13667	0.9737	0.6145	0


*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve

7


National Water Information System  
255654081350200  
Water Temperature

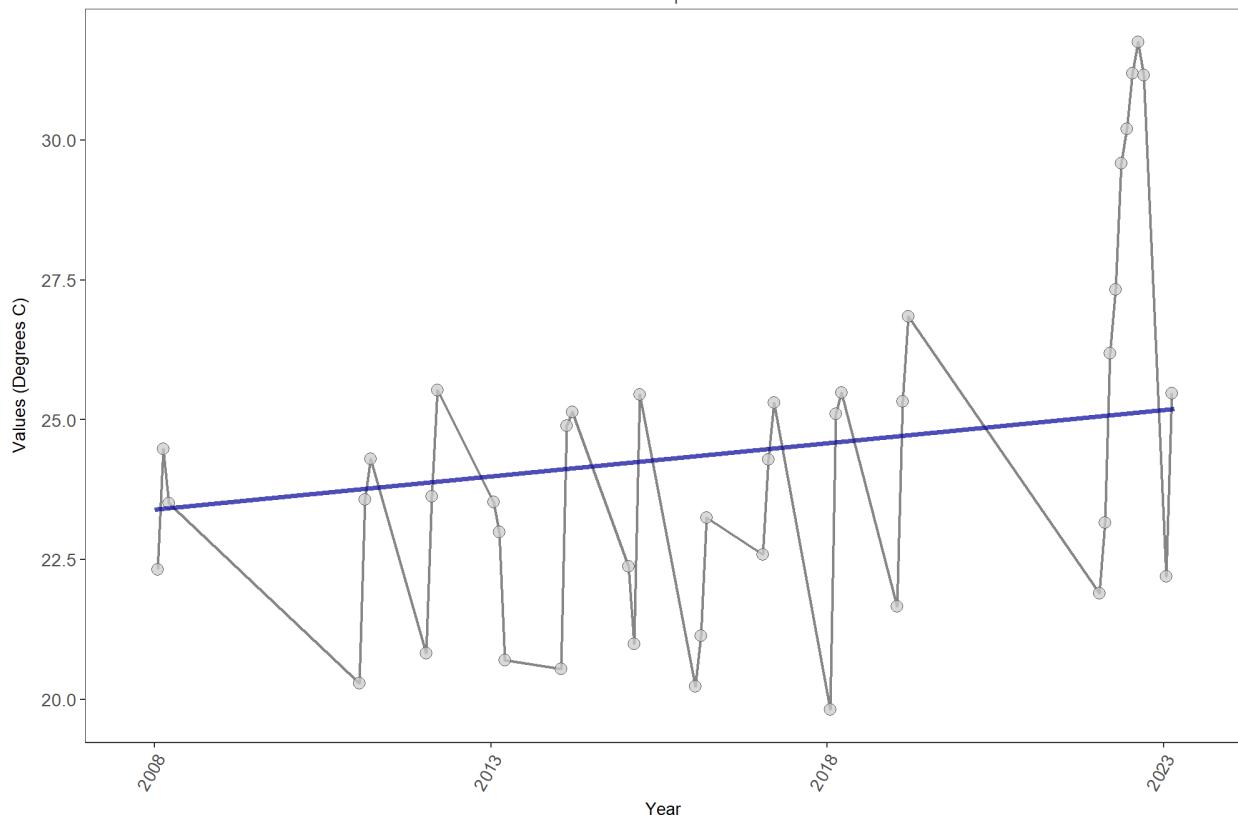

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbfwq  
 Water Temperature

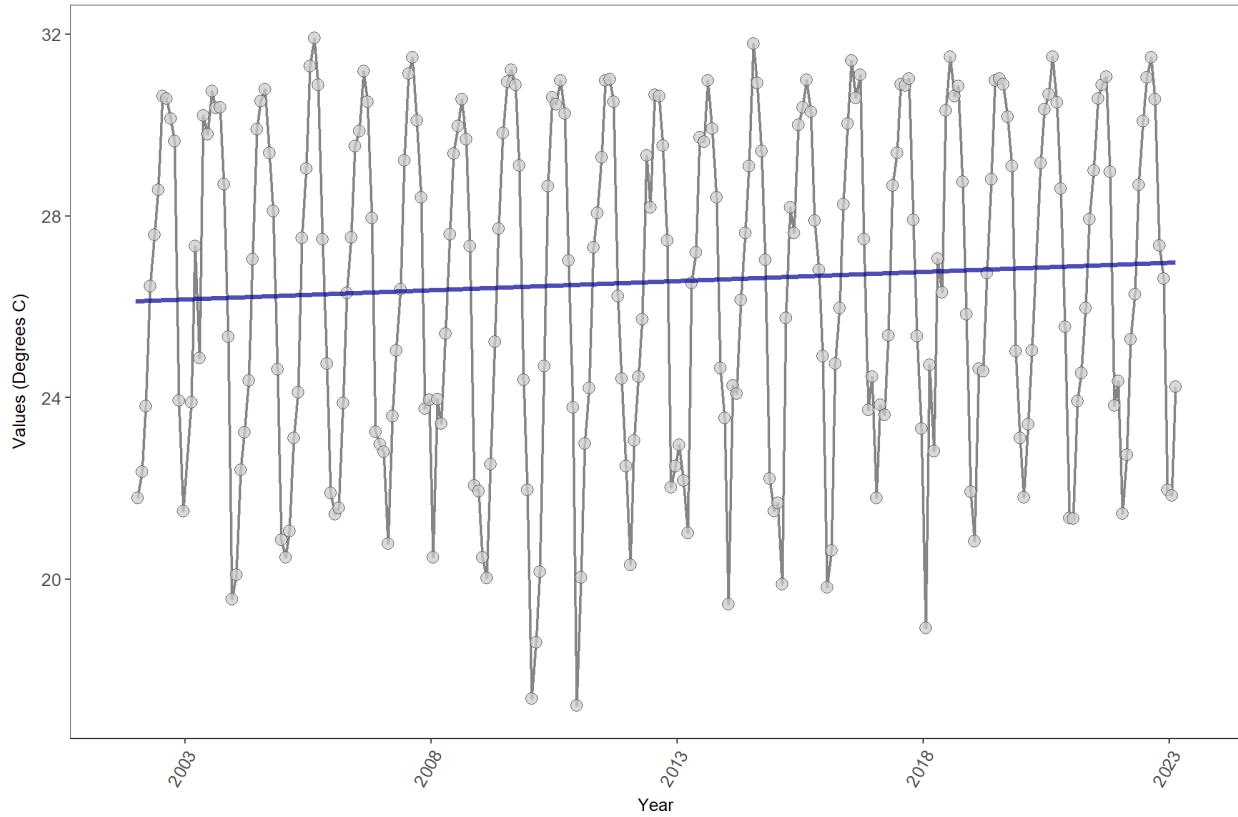


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	617400	22	26.9	TRUE	0.207	0.0000	0.0399503	26.12962	4.6389	0.9474	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 Water Temperature

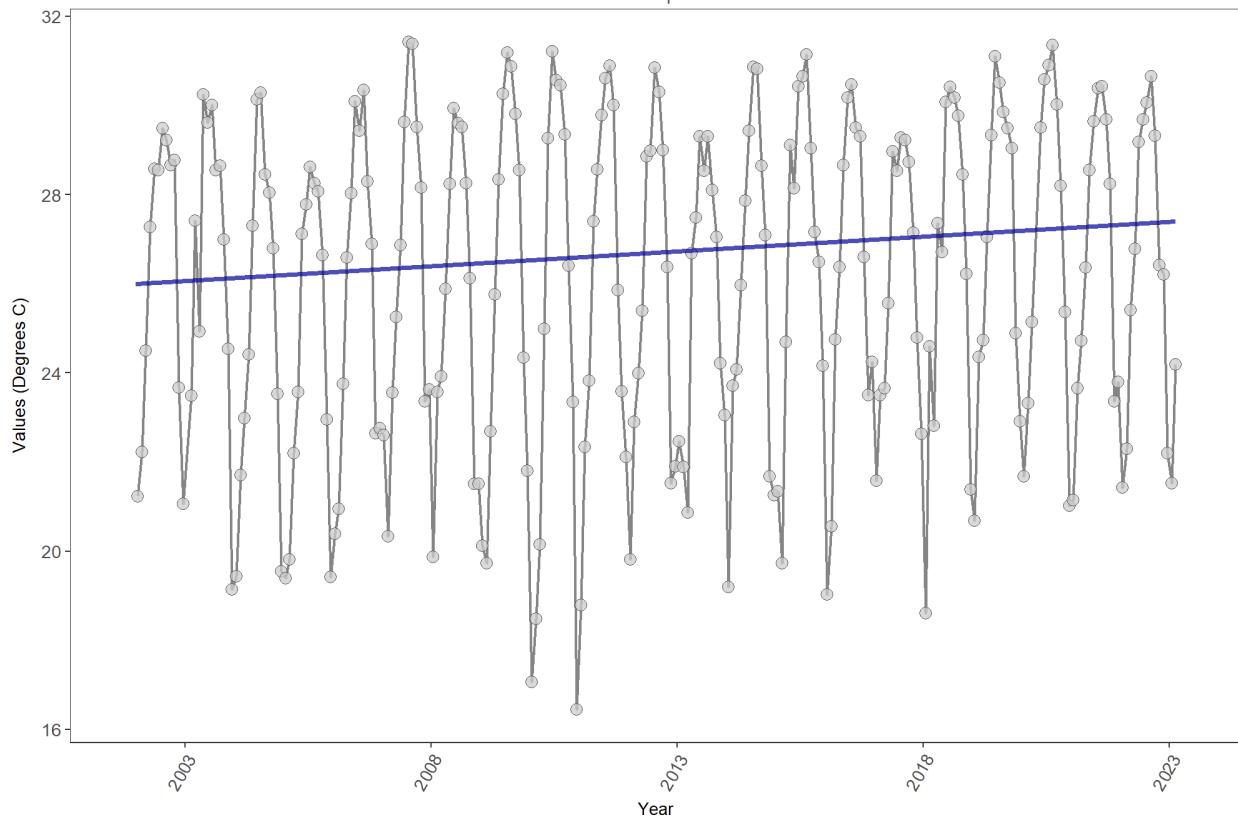


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	628216	22	26.9	TRUE	0.2457	0.0000	0.06654927	25.99832	3.0617	0.9899	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbhwq  
 Water Temperature

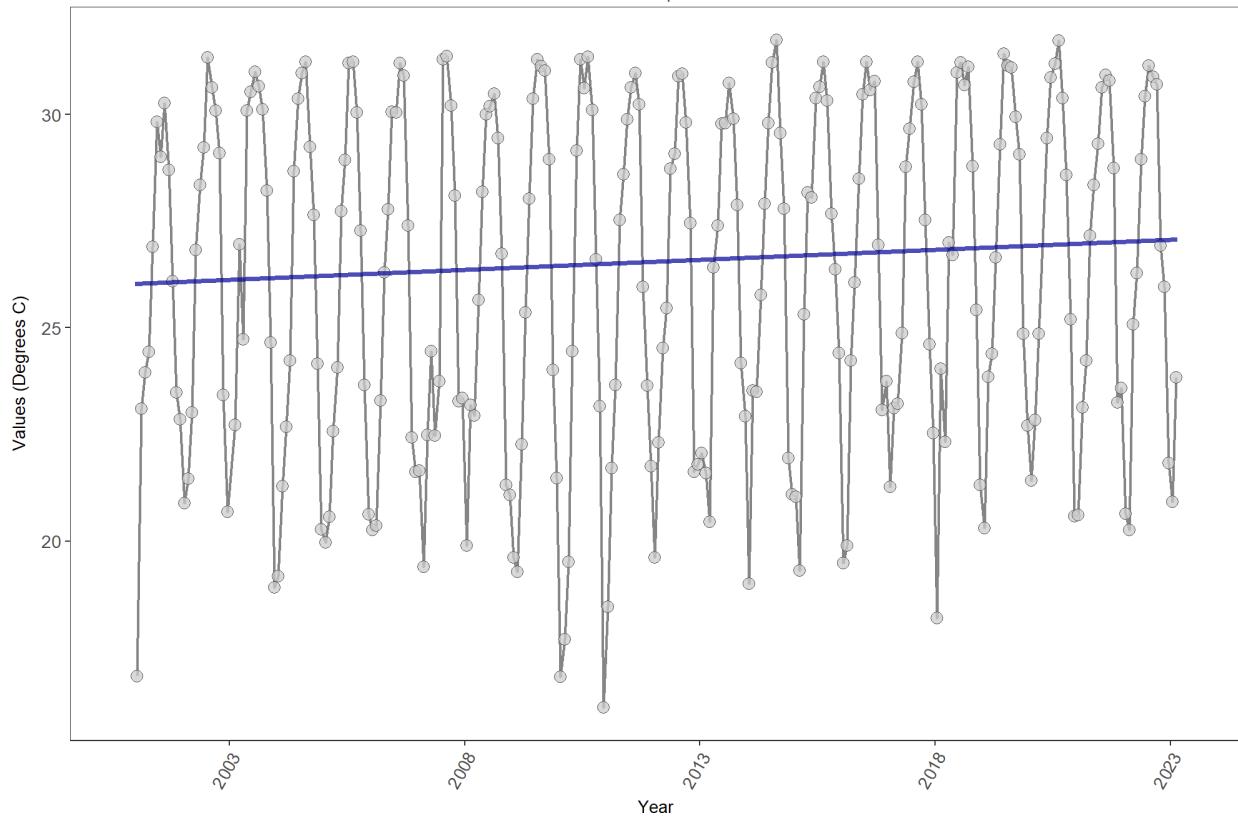


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	637072	23	26.8	TRUE	0.2124	0.0000	0.04698165	26.02916	4.3444	0.9587	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkmbwq  
 Water Temperature

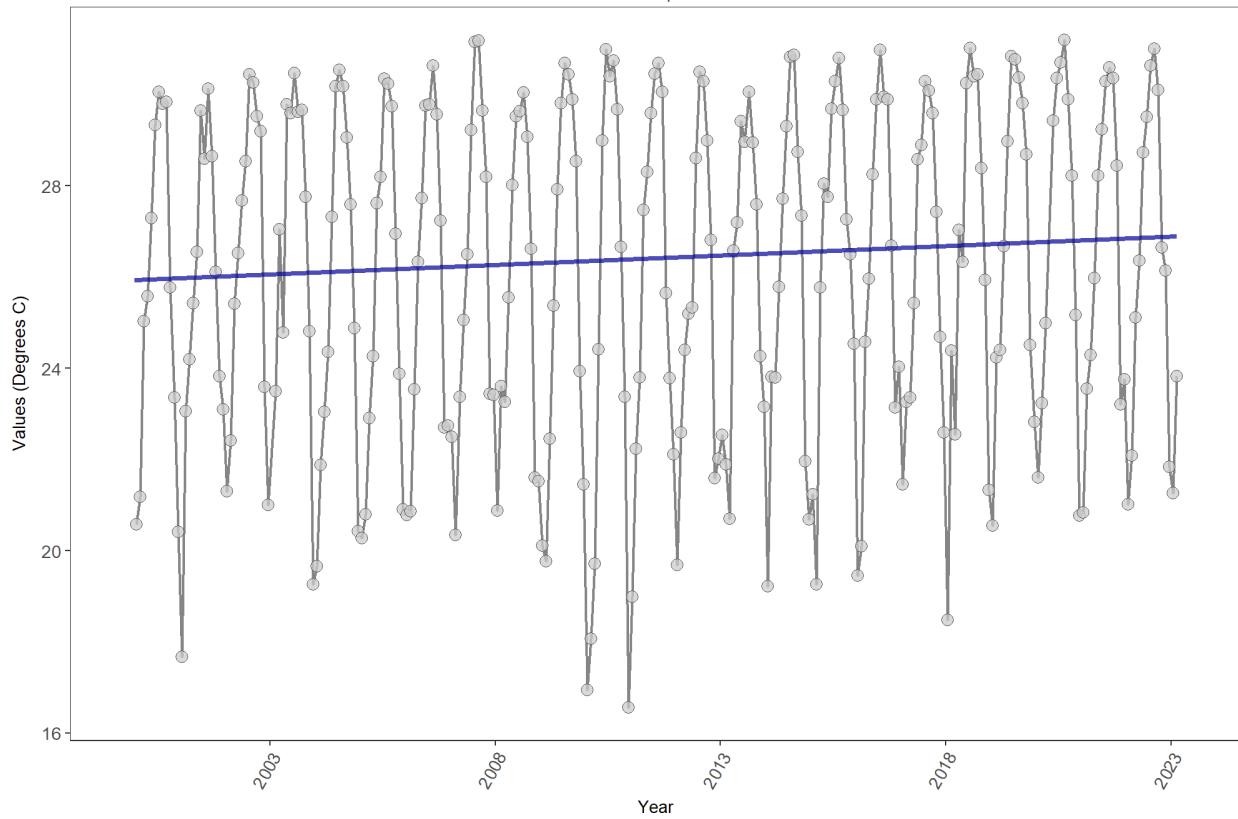


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	659894	24	26.8	TRUE	0.2279	0.0000	0.04149081	25.92818	3.7408	0.9769	1

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbpbwq  
 Water Temperature

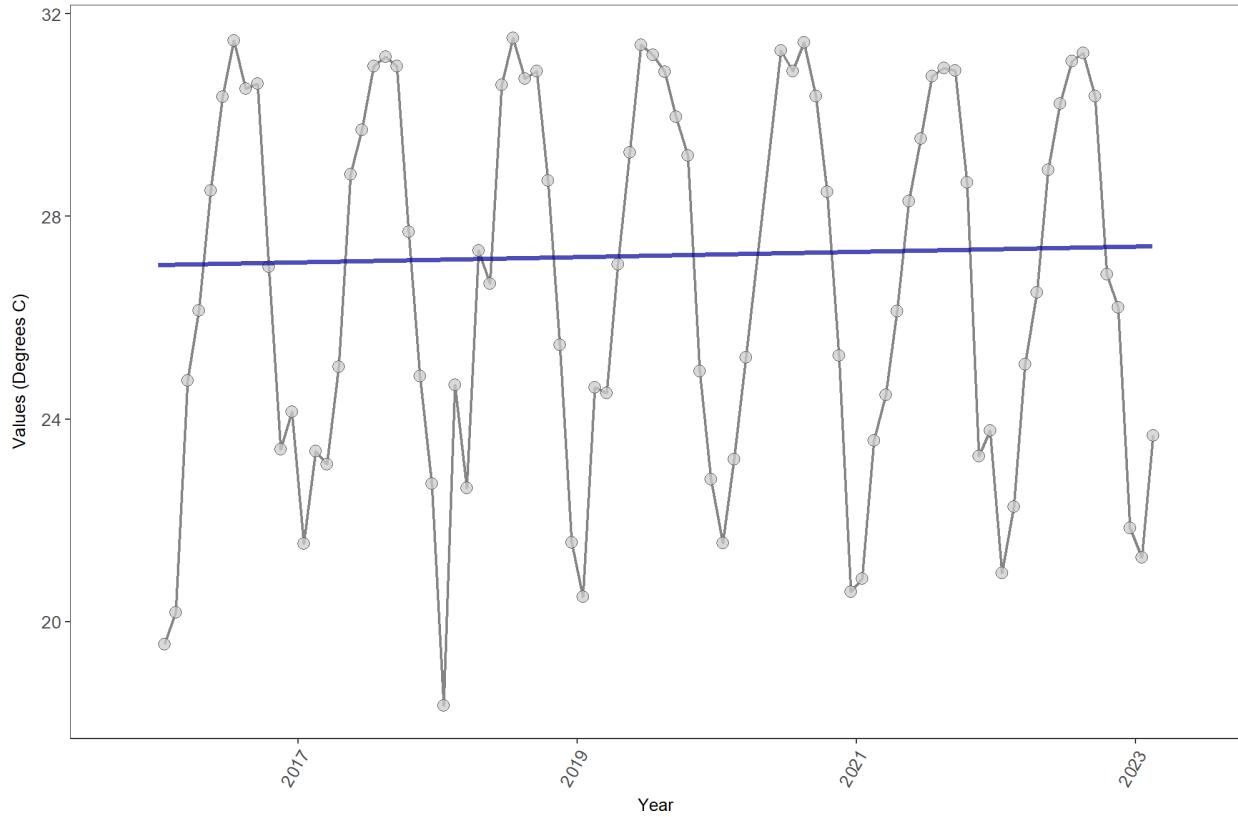


RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	236179	8	27.3	TRUE	0.0837	0.3670	0.05168587	27.0457	8.1622	0.6987	0

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbuhwq  
 Water Temperature

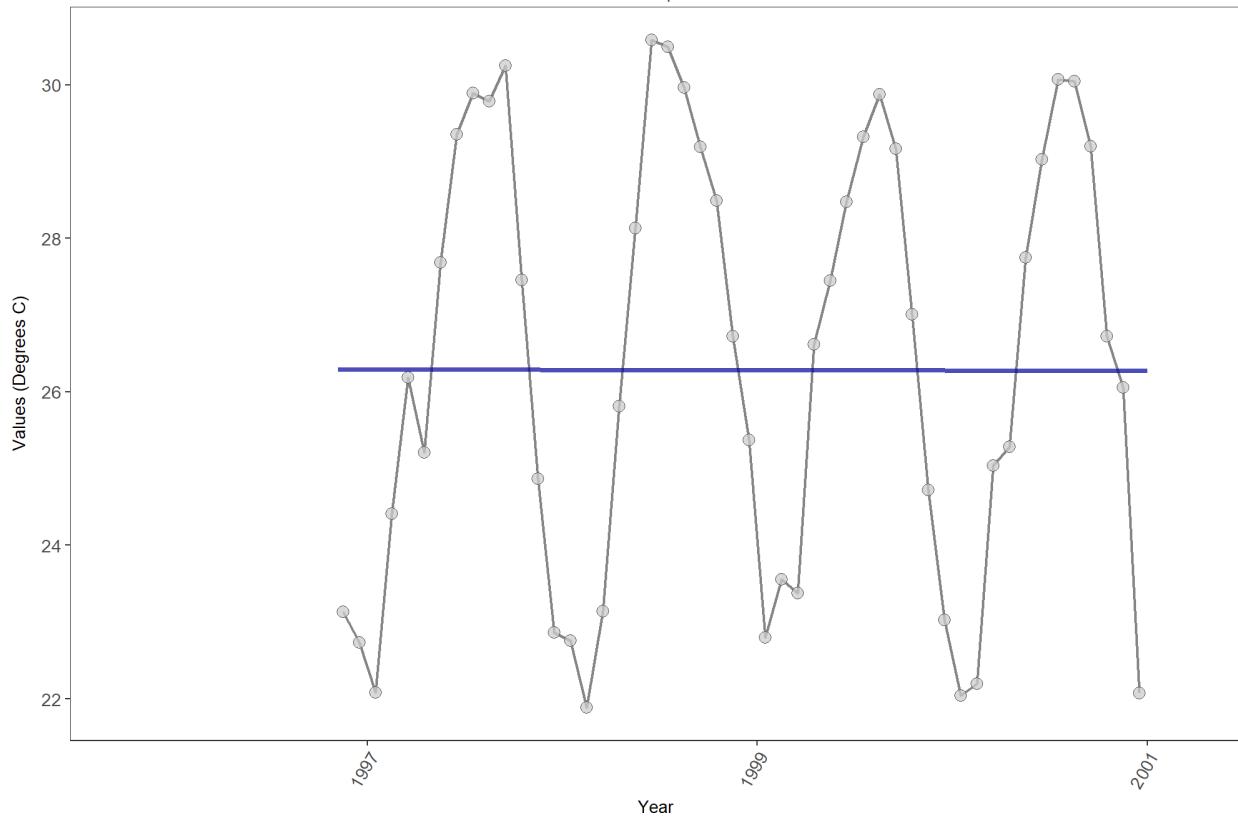

RelativeDepth	N_Data	N_Years	Median	Independent	tau	p	SennSlope	SennIntercept	ChiSquared	pChiSquared	Trend
bottom	68971	5	26.8	TRUE	-0.0133	1.0000	-0.005214494	26.30001	6.4865	0.839	0

*p < 0.00005 appear as 0 due to rounding.*

*SennIntercept is intercept value at beginning of record for monitoring location*

### Appendix III: Monitoring Location Summary Box Plots

Data is taken and grouped by MonitoringID. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of TRUE for the desired monitoring location
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the minimum, mean, and standard deviation for the data to be used for y-axis scales
  - Excludes the top 2% of values to reduce the impact of extreme outliers on the y-axis scale
4. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the box plots
5. Set the plot type as a box plot with the size of the outlier points
6. Create the title, x-axis, y-axis, and color fill labels
7. Set the y and x limits
8. Make the axis labels bold
9. Plot the arrangement as a set of panels

The following plots are arranged by MonitoringID with data grouped by Year, then Year and Month, then finally Month only. Each program area will have 3 sets of plots, each with 3 panels in them. Each panel goes as follows:

1. Y-axis autoscaled
2. Y-axis set to be mean + 4 times the standard deviation
3. Y-axis set to be mean + 4 times the standard deviation for most recent 10 years of data

```
# Determines whether analyzed monitoring locations exist. If they do, begins
# looping through them
if(n==0){
  print("There are no monitoring locations that qualify.")
} else {
  # Begin looping through monitoringg locations
  for (i in 1:n) {
    # Determine upper and lower bounds of time for x-axis
    year_lower <- min(data$Year[data$Use_In_Analysis==TRUE &
                                data$MonitoringID==Mon_IDs[i]])
    year_upper <- max(data$Year[data$Use_In_Analysis==TRUE &
                                data$MonitoringID==Mon_IDs[i]])

    # Determine upper and lower bounds of ResultValue for y-axis
    min_RV <- min(data$ResultValue[data$Use_In_Analysis==TRUE &
                                    data$MonitoringID==Mon_IDs[i]])
    mn_RV <- mean(data$ResultValue[data$Use_In_Analysis==TRUE &
                                    data$MonitoringID==Mon_IDs[i] &
                                    data$ResultValue <
                                    quantile(data$ResultValue, 0.98)])
    sd_RV <- sd(data$ResultValue[data$Use_In_Analysis==TRUE &
                                    data$MonitoringID==Mon_IDs[i] &
                                    data$ResultValue <
                                    quantile(data$ResultValue, 0.98)])

    # Sets x- and y-axis scale
    x_scale <- ifelse(year_upper - year_lower > 30, 10, 5)
    y_scale <- mn_RV + 4 * sd_RV
    # Gets managed area name for title
    MA_name <- skt_stats$ManagedAreaName[skt_stats$MonitoringID==Mon_IDs[i]]
    # Gets program location name for title
    Mon_name <- paste0(skt_stats$ProgramID[skt_stats$MonitoringID==Mon_IDs[i]],
                        "\n", skt_stats$ProgramName[skt_stats$MonitoringID==Mon_IDs[i]], "\n",
                        skt_stats$ProgramLocationID[skt_stats$MonitoringID==Mon_IDs[i]])

    ##Year plots
    # Create plot object for auto-scaled y-axis plot
    p1 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                            data$MonitoringID==Mon_IDs[i], ],
                  aes(x=Year, y=ResultValue, group=Year)) +
      geom_boxplot(color="#333333", fill="#cccccc", outlier.shape=21,
                   outlier.size=3, outlier.color="#333333",
                   outlier.fill="#cccccc", outlier.alpha=0.75) +
      labs(subtitle="Autoscale",
           x="Year", y=paste0("Values (", unit, ")")) +
      scale_x_continuous(limits=c(year_lower - 1, year_upper + 1),
                         breaks=rev(seq(year_upper,
                                       year_lower, -x_scale))) +
      # Add a layer for the most recent 10 years
      geom_boxplot(data = data[data$Year >= year_upper - 10, ],
                    color="#333333", fill="#cccccc", outlier.shape=21,
                    outlier.size=3, outlier.color="#333333",
                    outlier.fill="#cccccc", outlier.alpha=0.75) +
      # Add a layer for the most recent 5 years
      geom_boxplot(data = data[data$Year >= year_upper - 5, ],
                    color="#333333", fill="#cccccc", outlier.shape=21,
                    outlier.size=3, outlier.color="#333333",
                    outlier.fill="#cccccc", outlier.alpha=0.75) +
      # Add a layer for the most recent 1 year
      geom_boxplot(data = data[data$Year == year_upper, ],
                    color="#333333", fill="#cccccc", outlier.shape=21,
                    outlier.size=3, outlier.color="#333333",
                    outlier.fill="#cccccc", outlier.alpha=0.75)
```

```

plot_theme
# Create plot object for y-axis scaled plot
p2 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i], ],
              aes(x=Year, y=ResultValue, group=Year)) +
  geom_boxplot(color="#333333", fill="#cccccc", outlier.shape=21,
               outlier.size=3, outlier.color="#333333",
               outlier.fill="#cccccc", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation",
       x="Year", y=paste0("Values (", unit, ")")) +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits=c(year_lower - 1, year_upper + 1),
                     breaks=rev(seq(year_upper,
                                   year_lower, -x_scale))) +
  plot_theme
# Create plot object for y-axis scaled plot for past 10 years
p3 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i] &
                        data$Year>=year_upper-10, ],
              aes(x=Year, y=ResultValue, group=Year)) +
  geom_boxplot(color="#333333", fill="#cccccc", outlier.shape=21,
               outlier.size=3, outlier.color="#333333",
               outlier.fill="#cccccc", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation, Last 10 Years",
       x="Year", y=paste0("Values (", unit, ")")) +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits=c(year_upper - 10.5, year_upper + 1),
                     breaks=rev(seq(year_upper, year_upper - 10,-2))) +
  plot_theme
# Arrange plot objects
Yset <- ggarrange(p1, p2, p3, ncol=1)
# Create plot title object
p0 <- ggplot() + labs(title=paste0(MA_name, "\n", Mon_name),
                       subtitle="By Year") +
  plot_theme + theme(panel.border=element_blank(),
                     panel.grid.major=element_blank(),
                     panel.grid.minor=element_blank(),
                     axis.line=element_blank())

## Year & Month Plots
# Create plot object for auto-scaled y-axis plot
p4 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i], ],
              aes(x=YearMonthDec, y=ResultValue,
                  group=YearMonth, color=as.factor(Month))) +
  geom_boxplot(fill="#cccccc", outlier.size=1.5, outlier.alpha=0.75) +
  labs(subtitle="Autoscale",
       x="Year", y=paste0("Values (", unit, ")"), color="Month") +
  scale_x_continuous(limits=c(year_lower - 1, year_upper + 1),
                     breaks=rev(seq(year_upper,
                                   year_lower, -x_scale))) +
  plot_theme +

```

```

    theme(legend.position="none")
# Create plot object for y-axis scaled plot
p5 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i], ],
              aes(x=YearMonthDec, y=ResultValue,
                  group=YearMonth, color=as.factor(Month))) +
  geom_boxplot(fill="#cccccc", outlier.size=1.5, outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation",
       x="Year", y=paste0("Values (", unit, ")"), color="Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits=c(year_lower - 1, year_upper + 1),
                     breaks=rev(seq(year_upper,
                                    year_lower, -x_scale))) +
  plot_theme +
  theme(legend.position="top", legend.box="horizontal") +
  guides(color=guide_legend(nrow=1))
# Create plot object for y-axis scaled plot for past 10 years
p6 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i], ],
              aes(x=YearMonthDec, y=ResultValue,
                  group=YearMonth, color=as.factor(Month))) +
  geom_boxplot(fill="#cccccc", outlier.size=1.5, outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation, Last 10 Years",
       x="Year", y=paste0("Values (", unit, ")"), color="Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits=c(year_upper - 10.5, year_upper + 1),
                     breaks=rev(seq(year_upper, year_upper - 10,-2))) +
  plot_theme +
  theme(legend.position="none")
# Create legend object
leg1 <- get_legend(p5)
# Arrange plots and legend
YMset <- ggarrange(leg1, p4, p5 + theme(legend.position="none"), p6,
                   ncol=1, heights=c(0.1, 1, 1, 1))
# Create plot title object
p00 <- ggplot() + labs(title=paste0(MA_name, "\n", Mon_name),
                        subtitle="By Year & Month") + plot_theme +
  theme(panel.border=element_blank(),
        panel.grid.major=element_blank(),
        panel.grid.minor=element_blank(), axis.line=element_blank())

## Month Plots
# Create plot object for auto-scaled y-axis plot
p7 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i], ],
              aes(x=Month, y=ResultValue,
                  group=Month, fill=as.factor(Month))) +
  geom_boxplot(color="#333333", outlier.shape=21, outlier.size=3,
               outlier.color="#333333", outlier.alpha=0.75) +
  labs(subtitle="Autoscale",
       x="Month", y=paste0("Values (", unit, ")"), fill="Month") +
  scale_x_continuous(limits=c(0, 13), breaks=seq(3, 12, 3)) +
  plot_theme +

```


```

    theme(legend.position="none")
# Create plot object for y-axis scaled plot
p8 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i], ],
              aes(x=Month, y=ResultValue,
                  group=Month, fill=as.factor(Month))) +
  geom_boxplot(color="#333333", outlier.shape=21, outlier.size=3,
               outlier.color="#333333", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation",
       x="Month", y=paste0("Values (", unit, ")"), fill="Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits=c(0, 13), breaks=seq(3, 12, 3)) +
  plot_theme +
  theme(legend.position="top", legend.box="horizontal") +
  guides(fill=guide_legend(nrow=1))
# Create plot object for y-axis scaled plot for past 10 years
p9 <- ggplot(data=data[data$Use_In_Analysis==TRUE &
                        data$MonitoringID==Mon_IDs[i] &
                        data$Year >= year_upper - 10, ],
              aes(x=Month, y=ResultValue,
                  group=Month, fill=as.factor(Month))) +
  geom_boxplot(color="#333333", outlier.shape=21, outlier.size=3,
               outlier.color="#333333", outlier.alpha=0.75) +
  labs(subtitle="Scaled to 4x Standard Deviation, Last 10 Years",
       x="Month", y=paste0("Values (", unit, ")"), fill="Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits=c(0, 13), breaks=seq(3, 12, 3)) +
  plot_theme +
  theme(legend.position="none")
# Create legend object
leg2 <- get_legend(p8)
# Arrange plots and legend
Mset <- ggarrange(leg2, p7, p8 + theme(legend.position="none"), p9,
                  ncol=1, heights=c(0.1, 1, 1, 1))
# Create title object
p000 <- ggplot() + labs(title=paste0(MA_name, "\n", Mon_name),
                          subtitle="By Month") + plot_theme +
  theme(panel.border=element_blank(),
        panel.grid.major=element_blank(),
        panel.grid.minor=element_blank(), axis.line=element_blank())
# Arrange and display plots with titles for all combinations
print(ggarrange(p0, Yset, ncol=1, heights=c(0.1, 1)))
print(ggarrange(p00, YMset, ncol=1, heights=c(0.1, 1)))
print(ggarrange(p000, Mset, ncol=1, heights=c(0.1, 1)))

rm(plot_data)
rm(p1, p2, p3, p4, p5, p6, p7, p8, p9, p0, p00, p000, leg1, leg2,
    Yset, YMset, Mset)
}
}

```

Cape Romano-Ten Thousand Islands Aquatic Preserve  
7  
National Water Information System  
255123081321300  
By Year

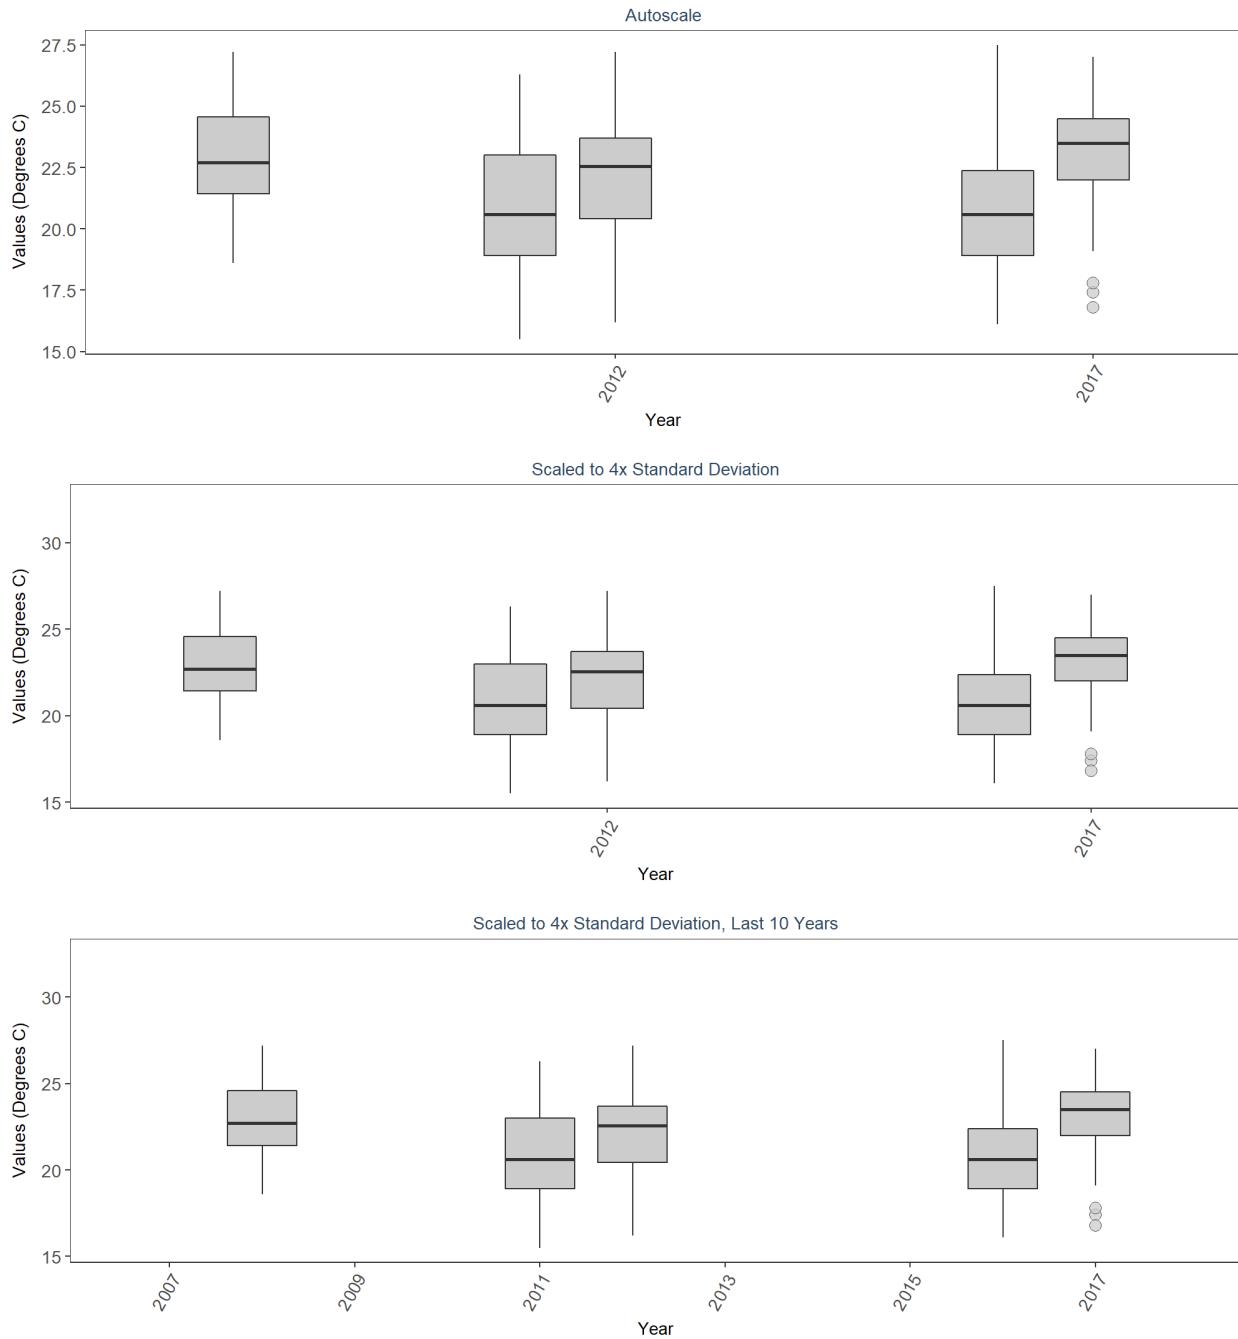

Cape Romano-Ten Thousand Islands Aquatic Preserve

7


National Water Information System

255123081321300


By Year & Month

Month 1 2 3


Autoscale

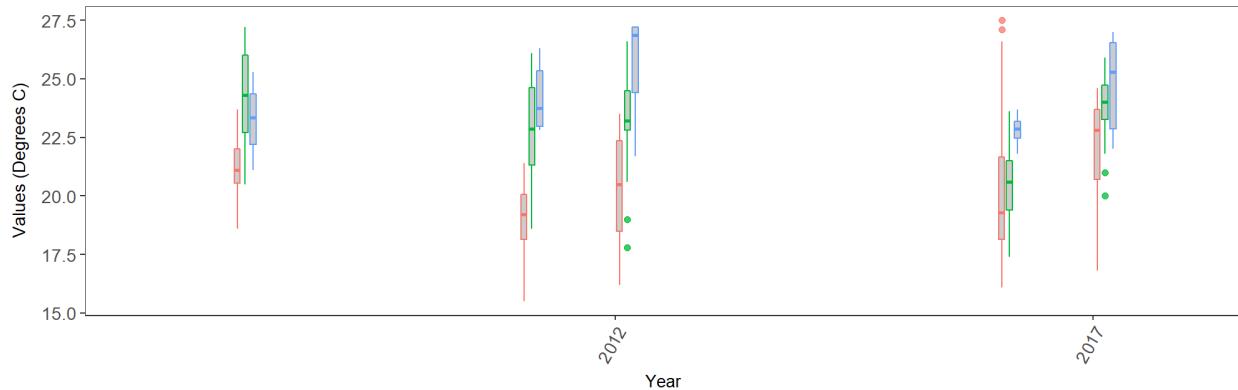

Scaled to 4x Standard Deviation

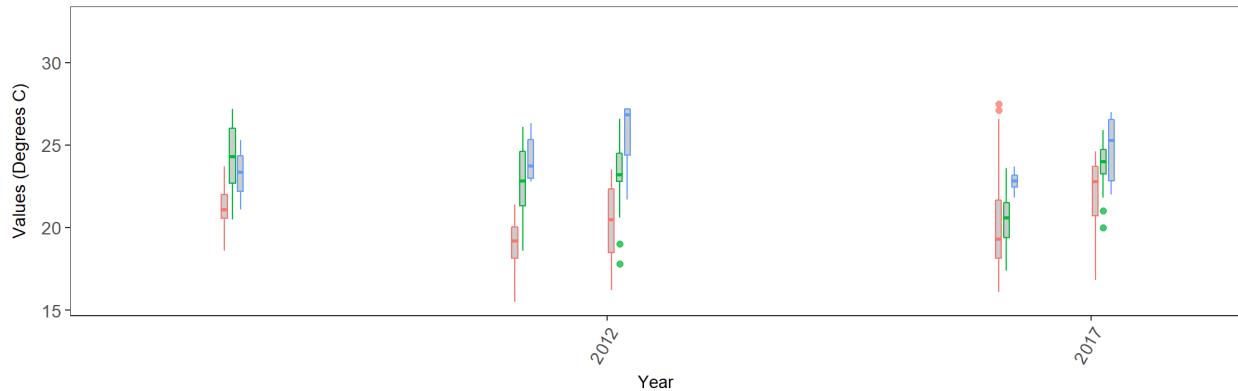


Scaled to 4x Standard Deviation, Last 10 Years

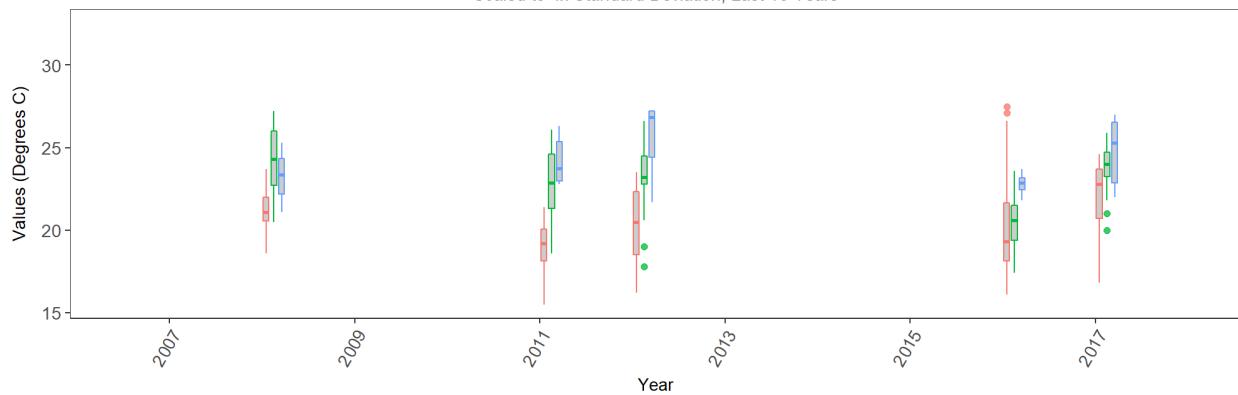


Cape Romano-Ten Thousand Islands Aquatic Preserve  
7  
National Water Information System  
255123081321300  
By Month

Month 1 2 3


Autoscale

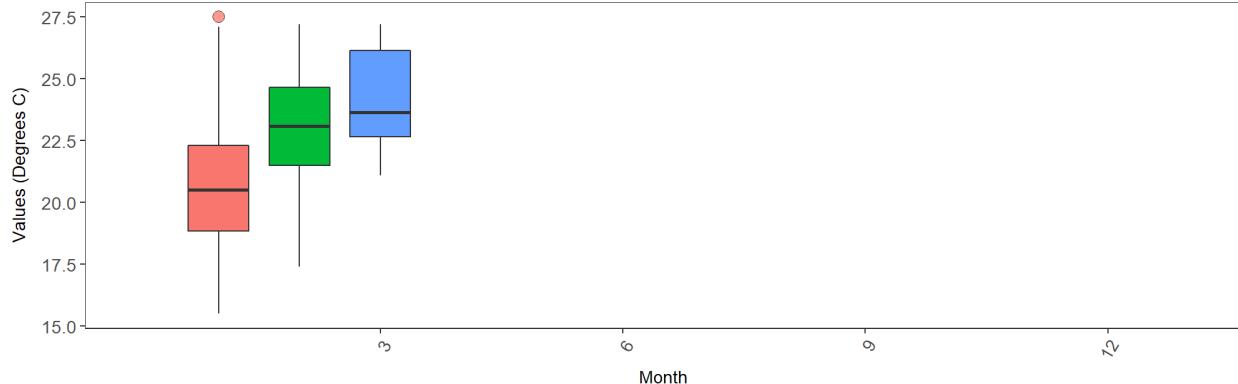


Scaled to 4x Standard Deviation

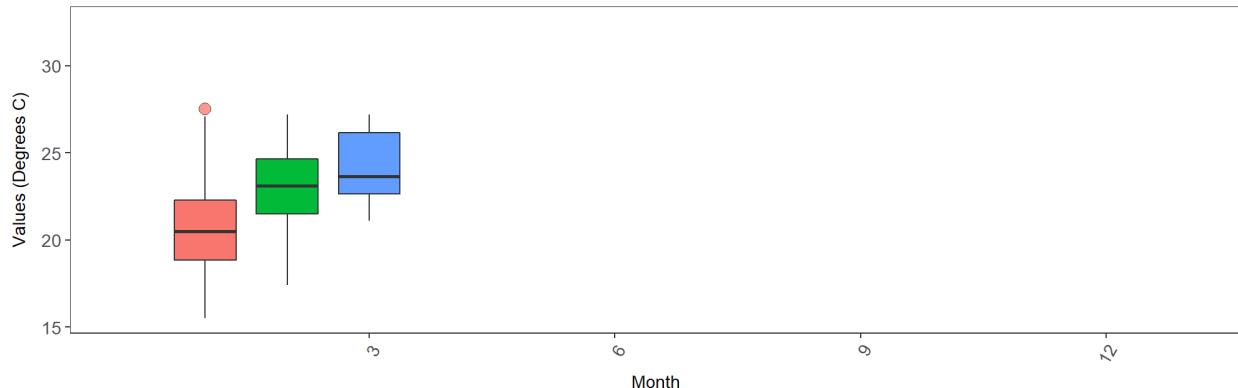

Scaled to 4x Standard Deviation, Last 10 Years

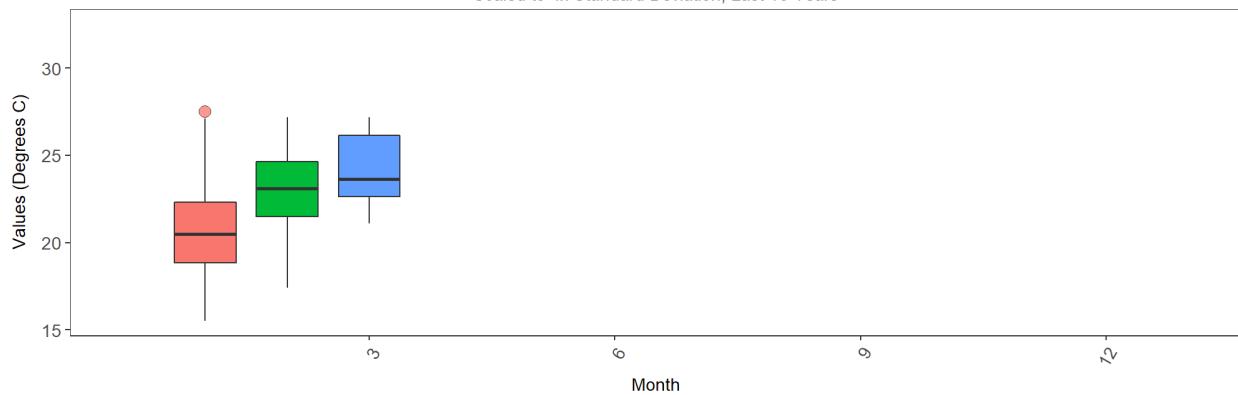


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255432081303900  
 By Year

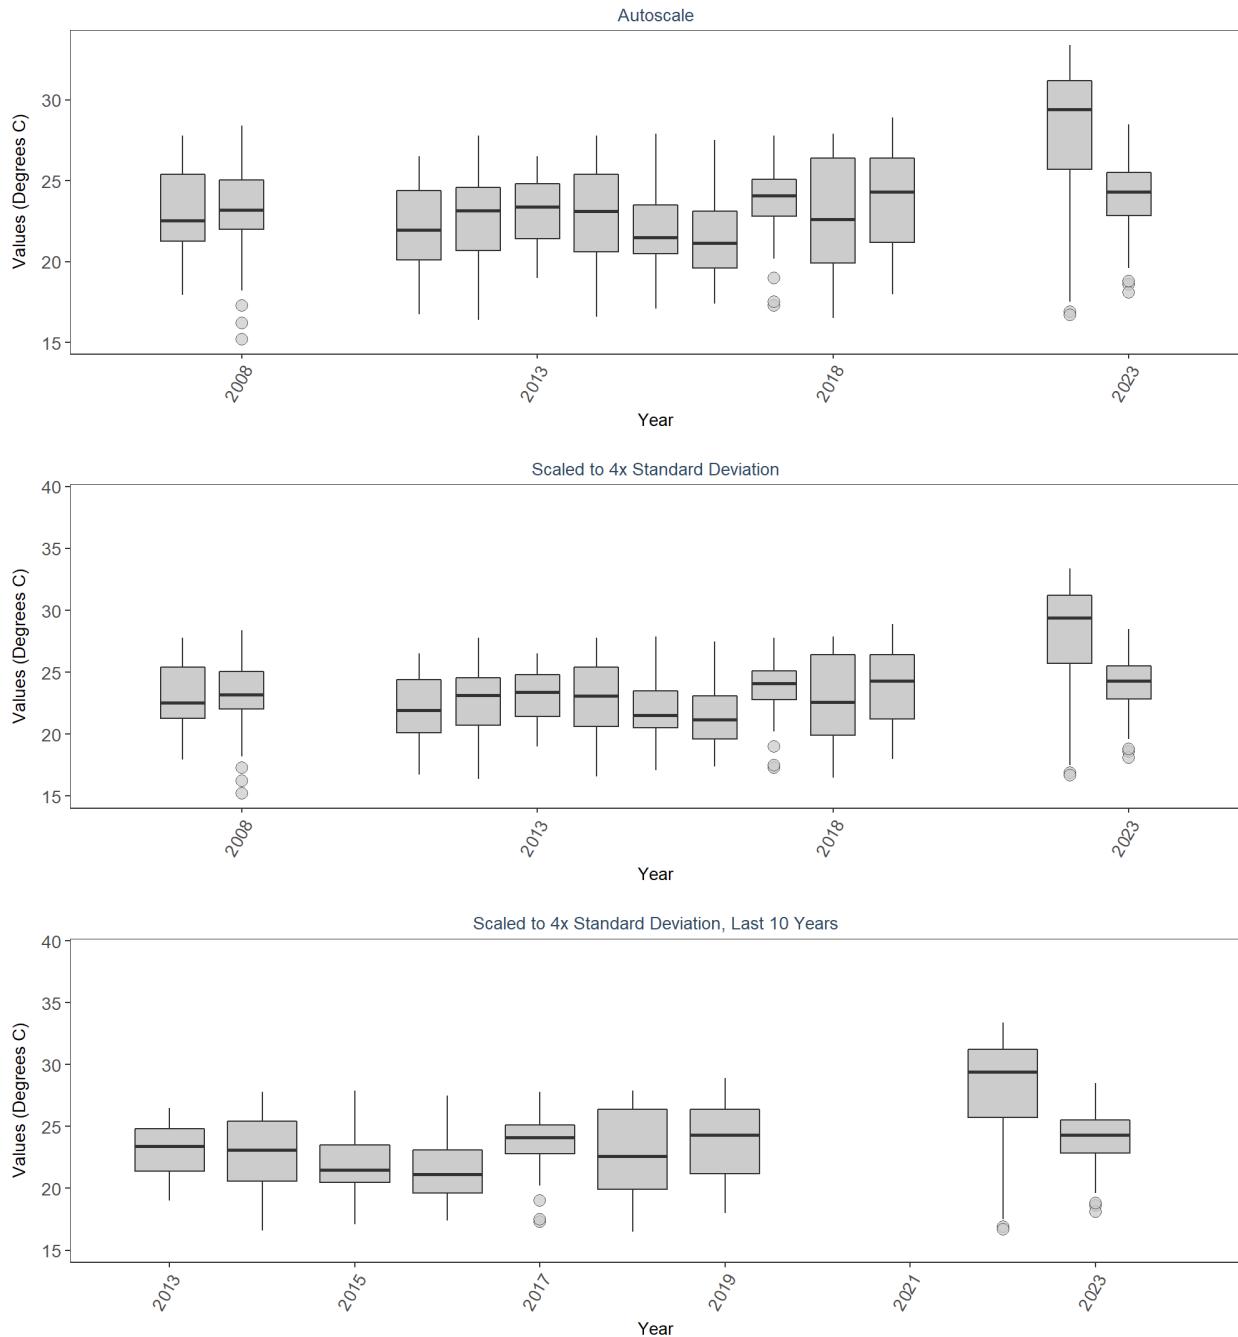


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255432081303900  
 By Year & Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

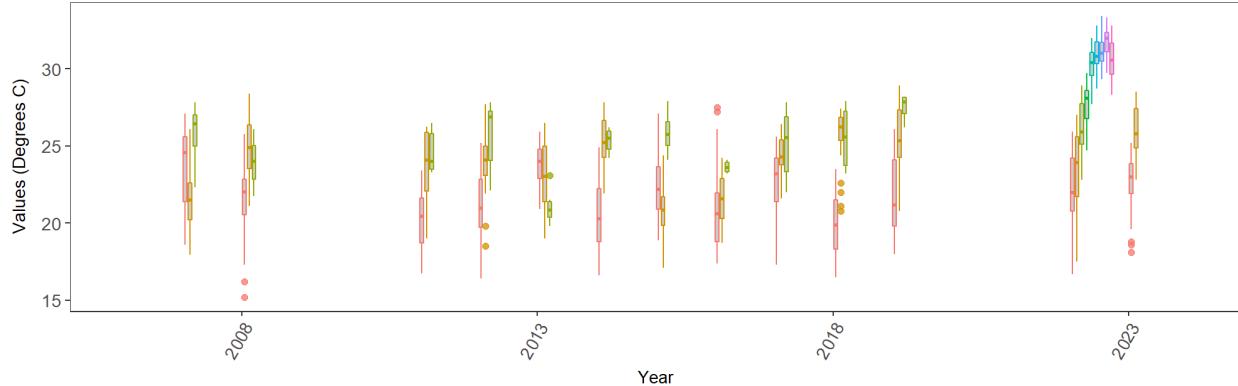

Scaled to 4x Standard Deviation

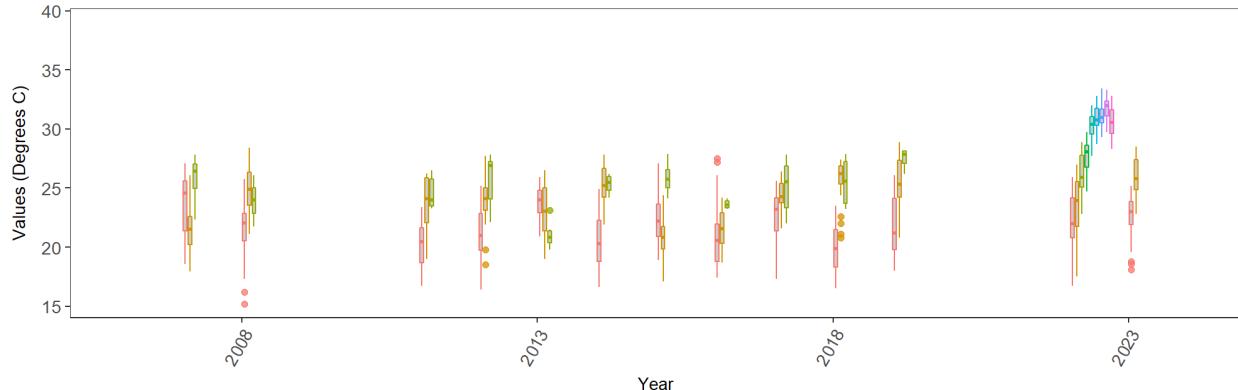


Scaled to 4x Standard Deviation, Last 10 Years

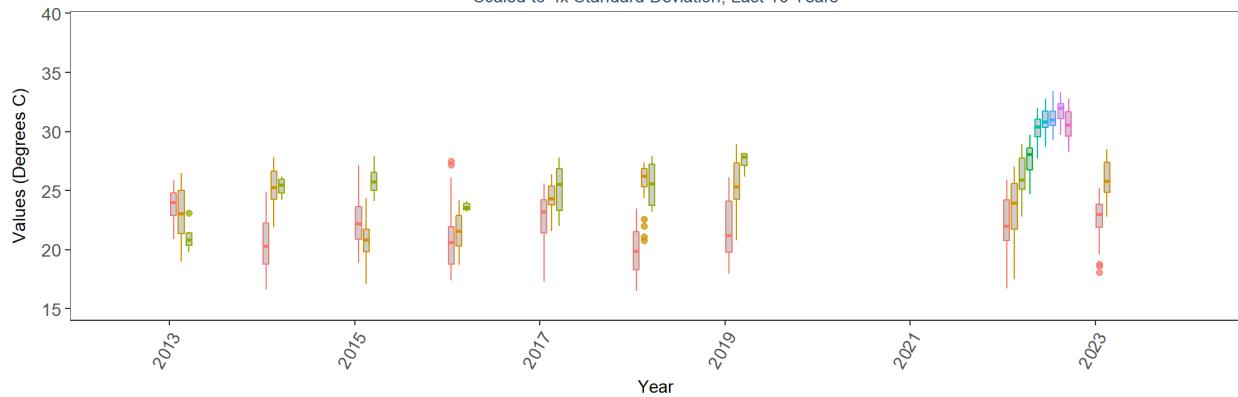


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255432081303900  
 By Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

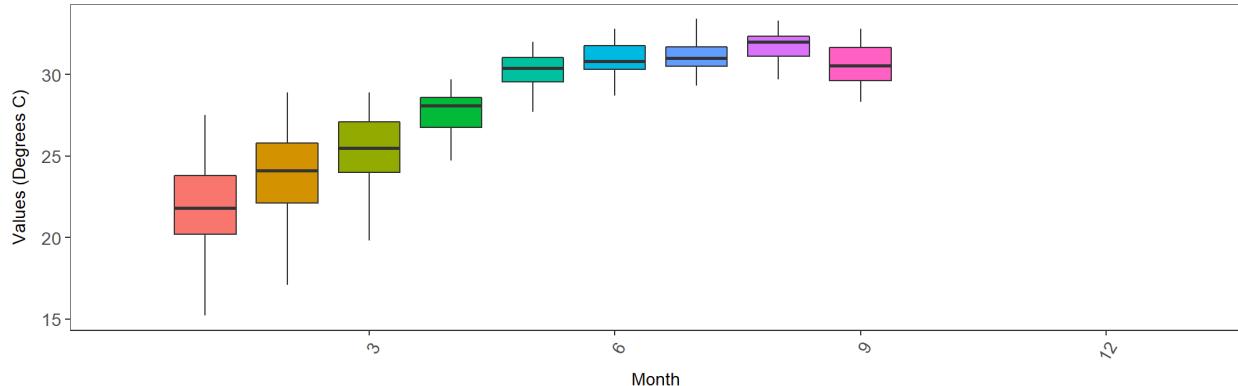


Scaled to 4x Standard Deviation

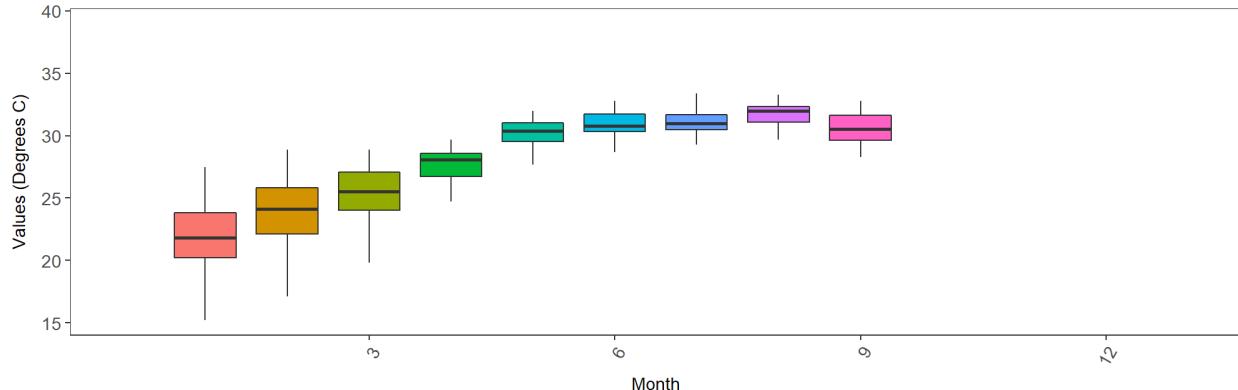


Scaled to 4x Standard Deviation, Last 10 Years

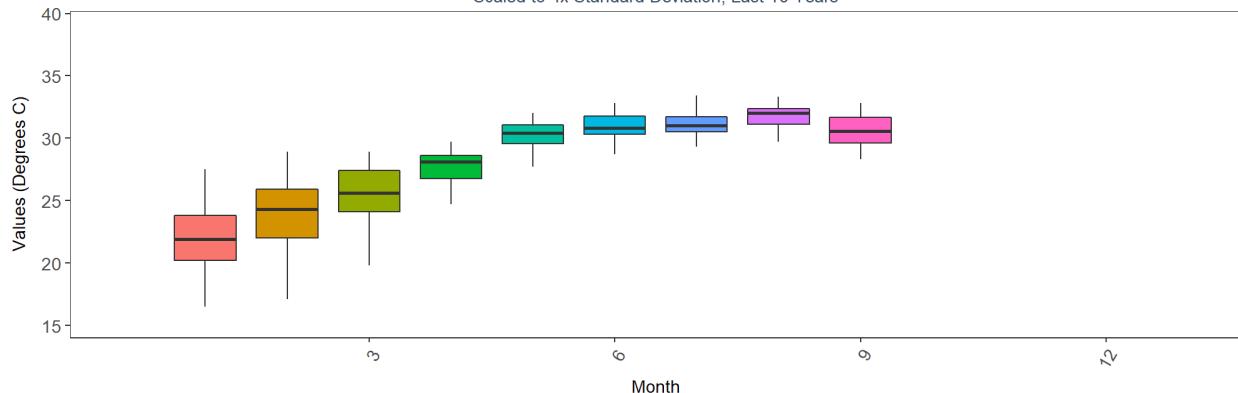




Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255534081324000  
 By Year

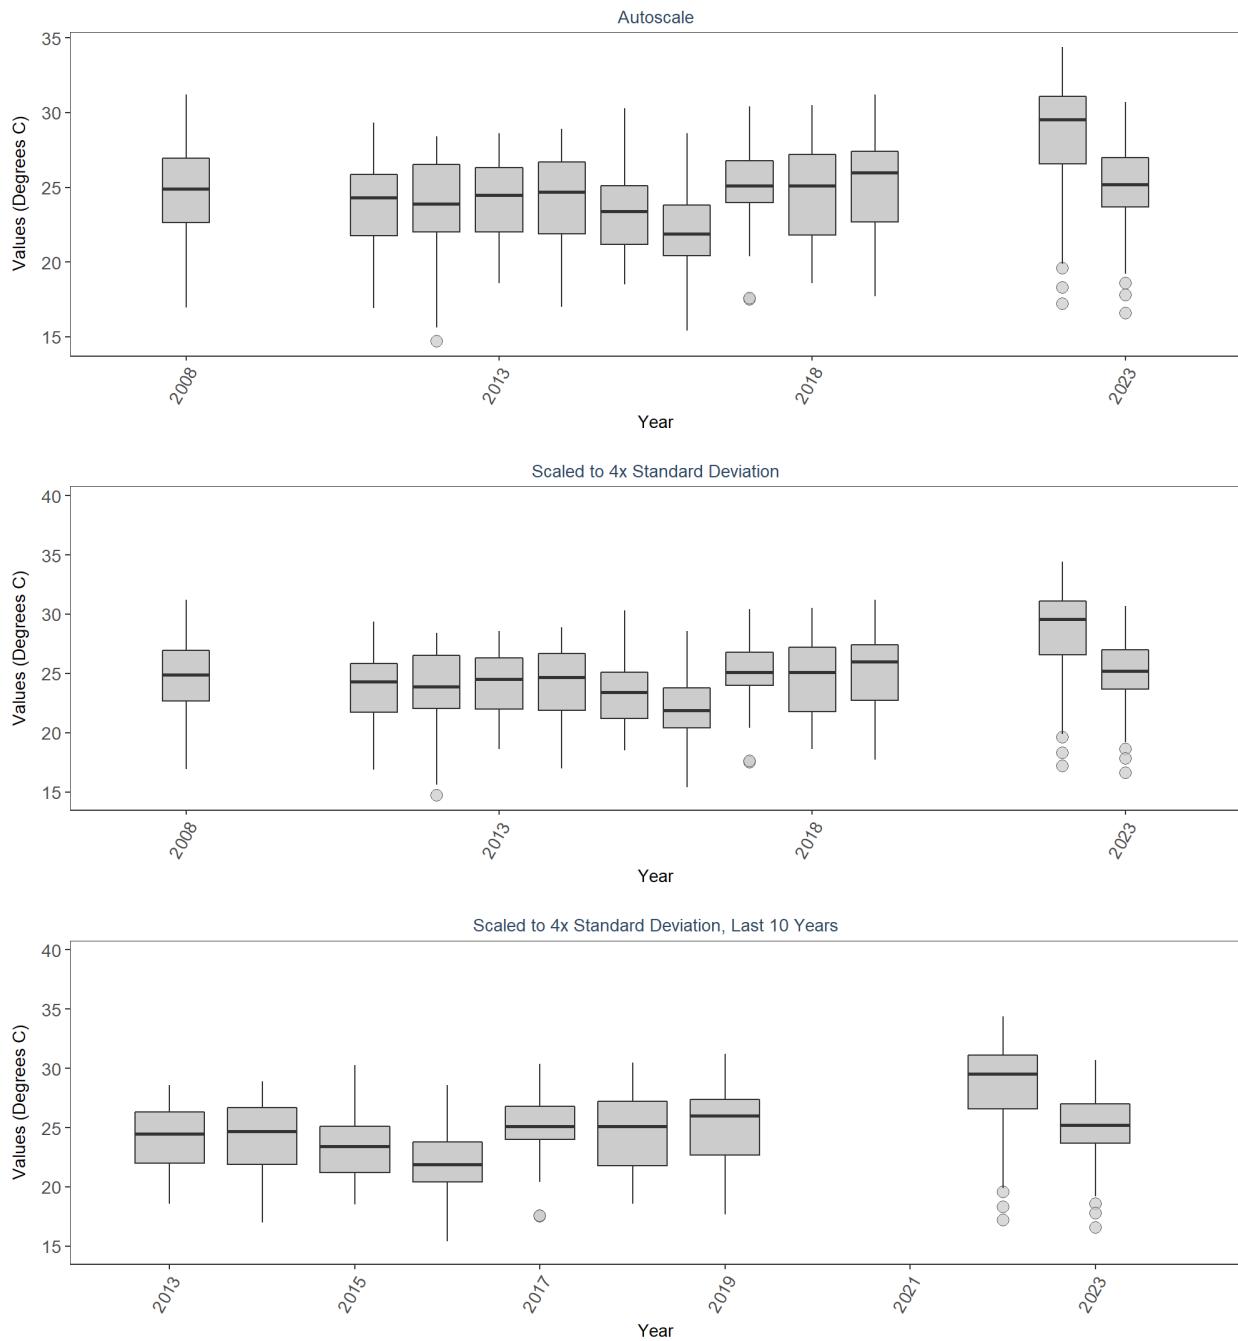


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255534081324000  
 By Year & Month

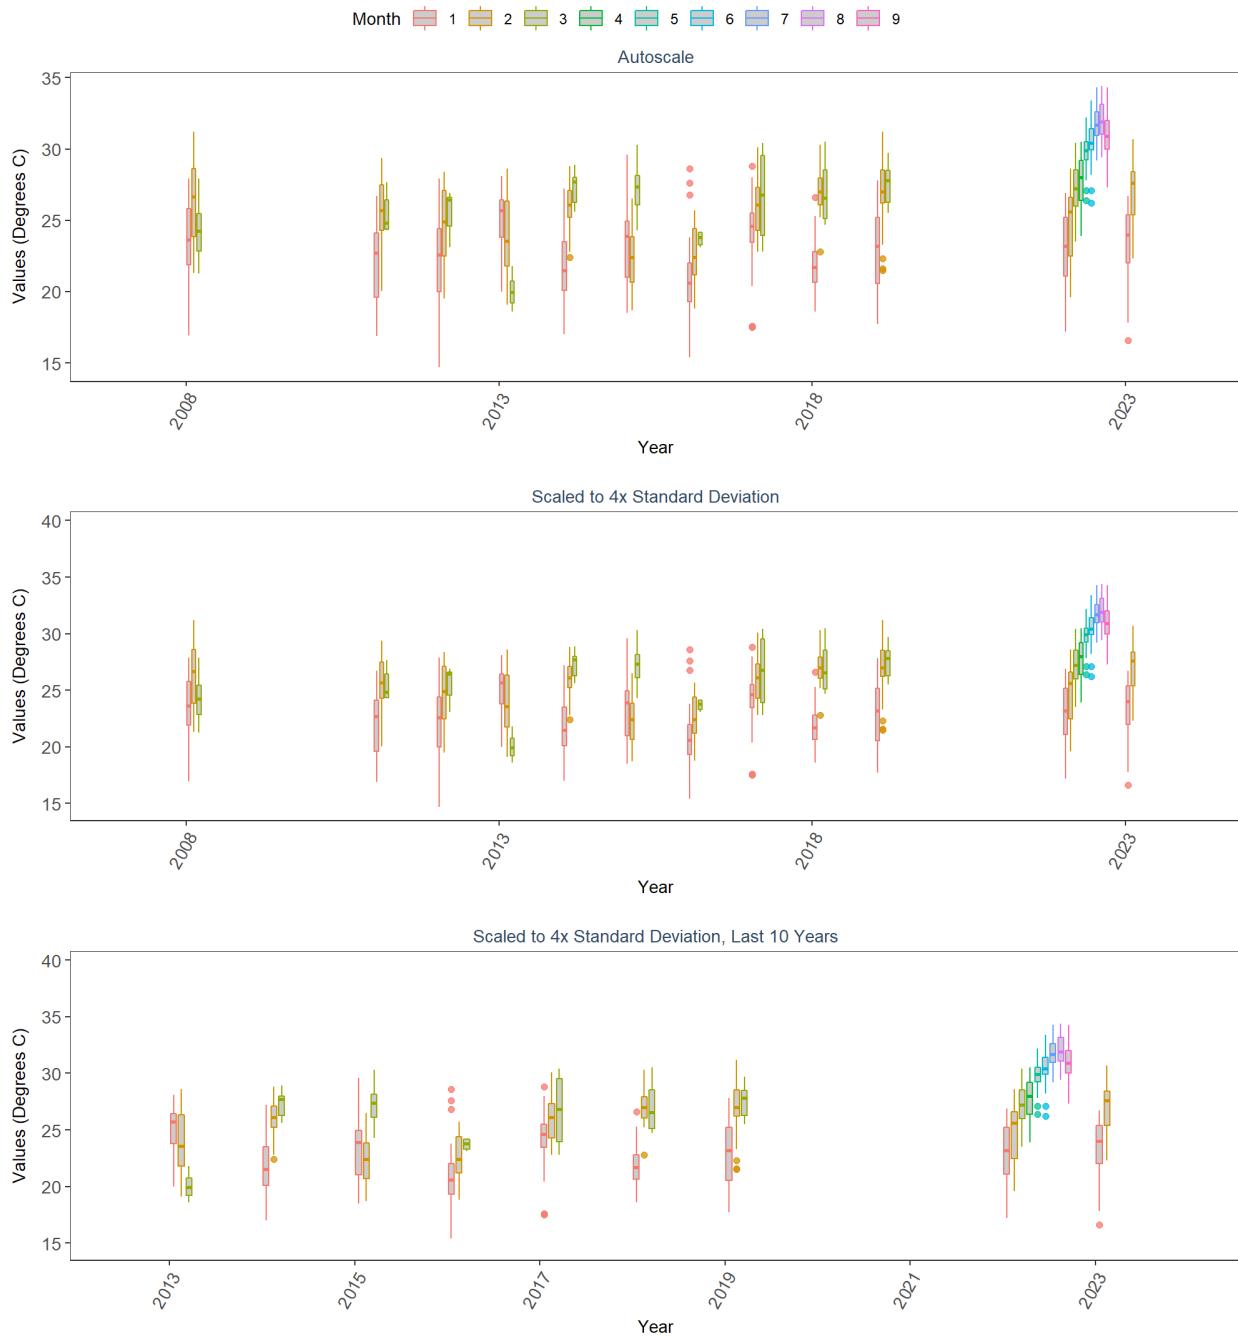

Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255534081324000  
 By Month

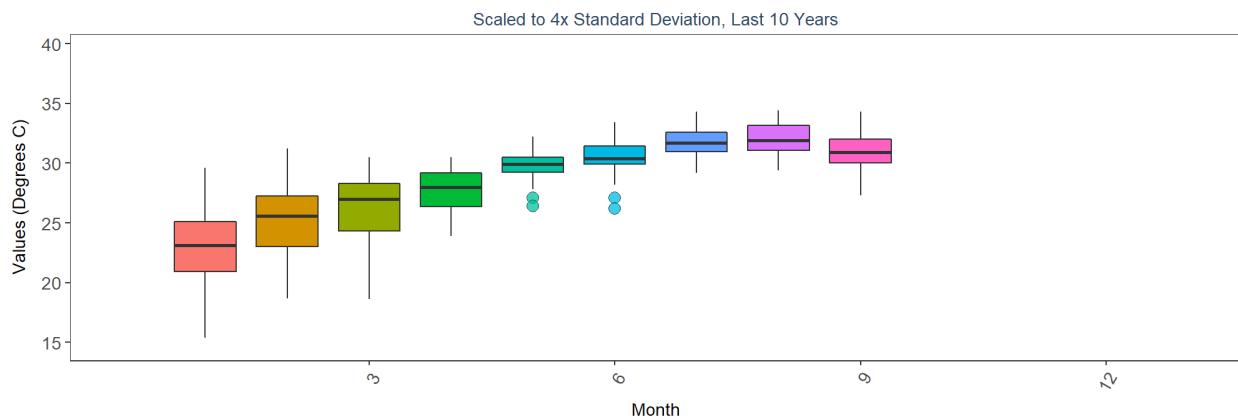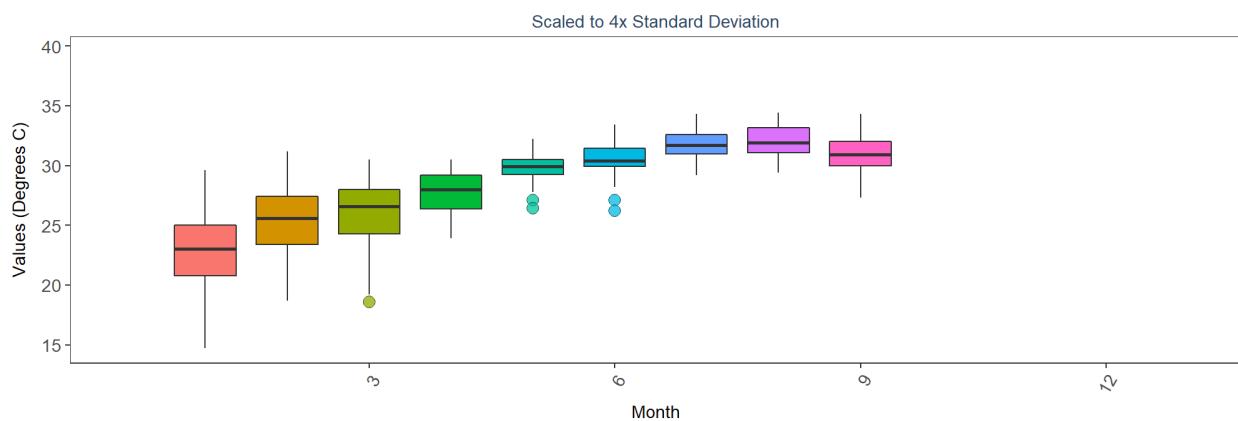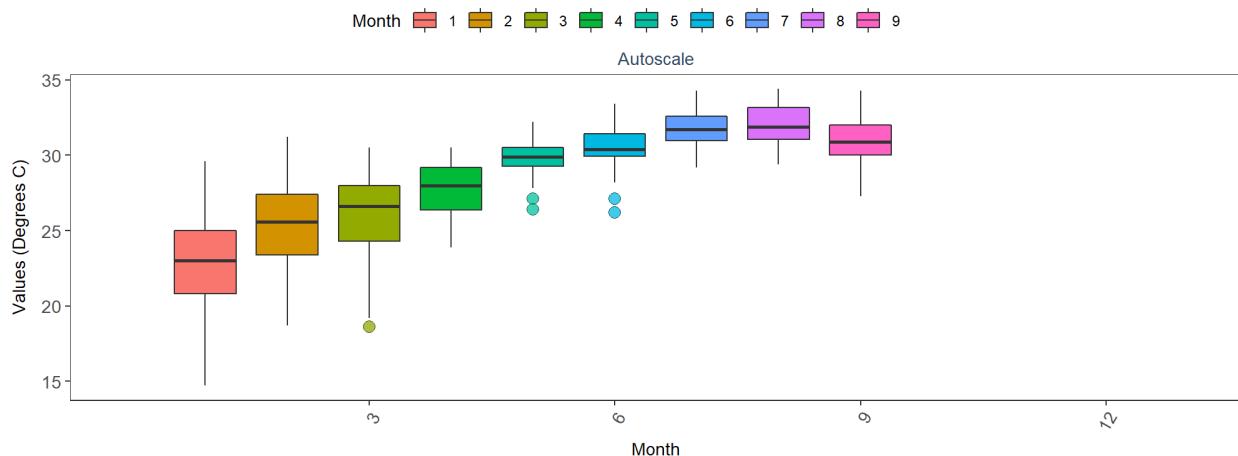


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255654081350200  
 By Year

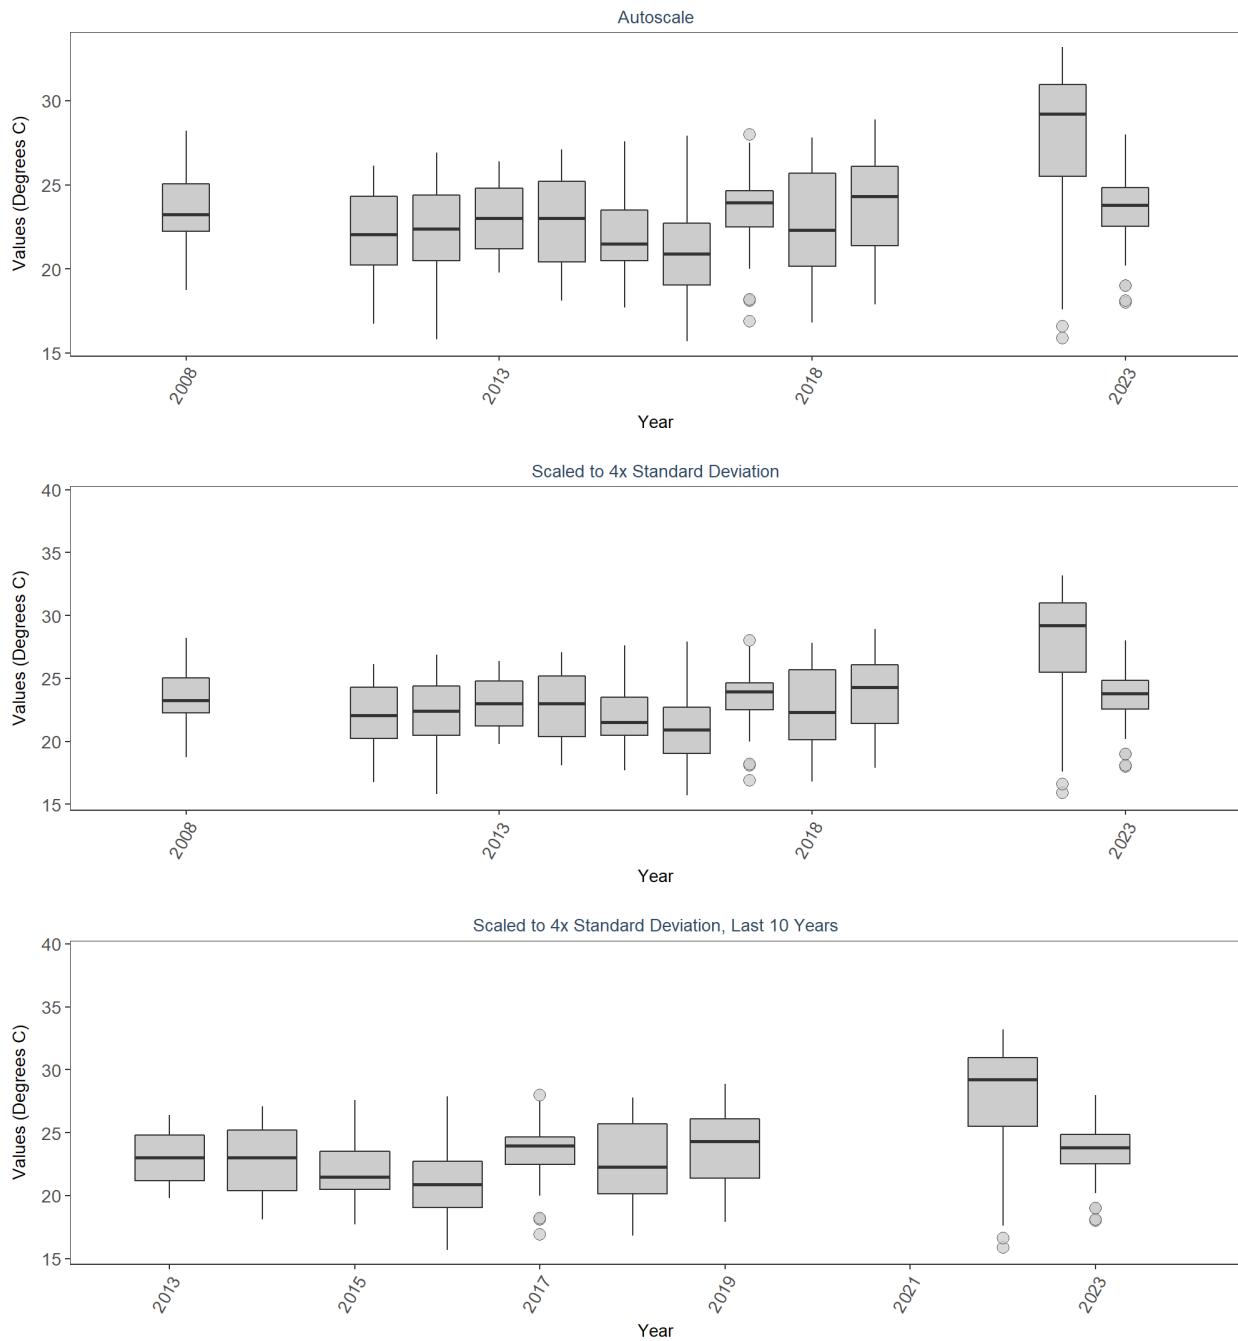


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255654081350200  
 By Year & Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

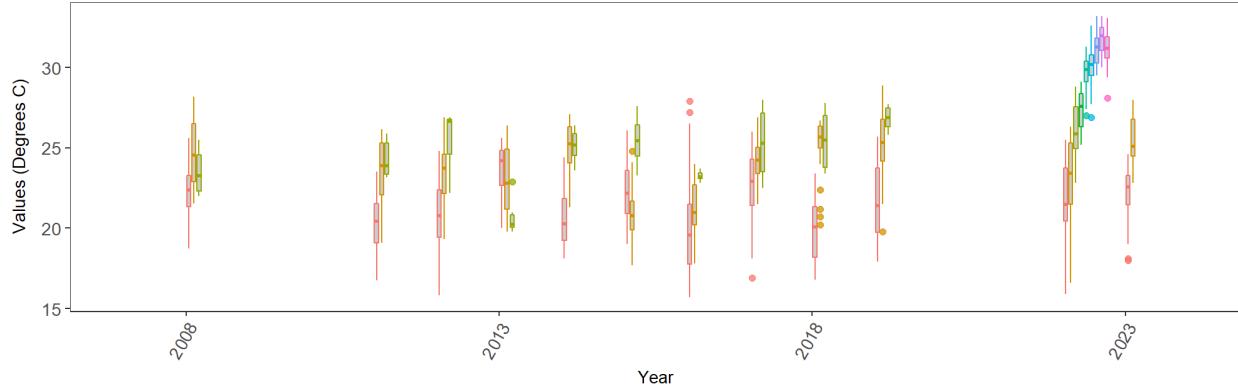


Scaled to 4x Standard Deviation

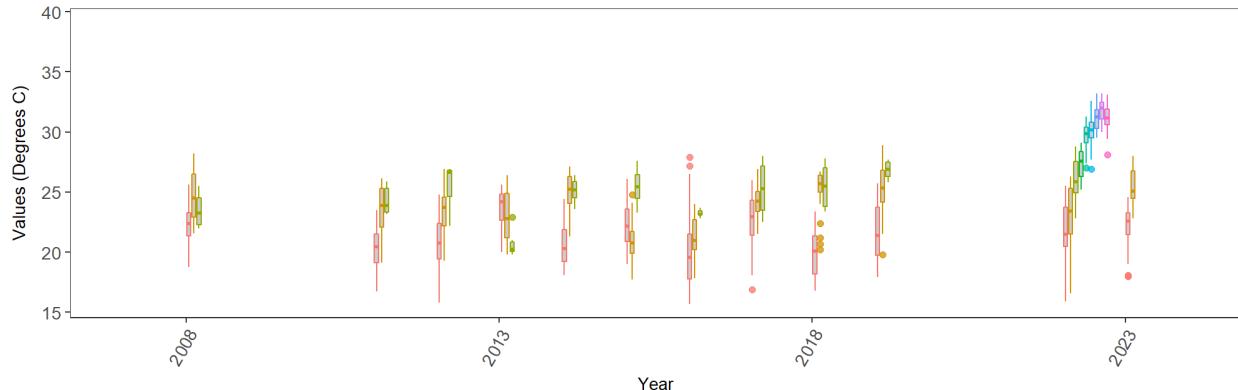


Scaled to 4x Standard Deviation, Last 10 Years

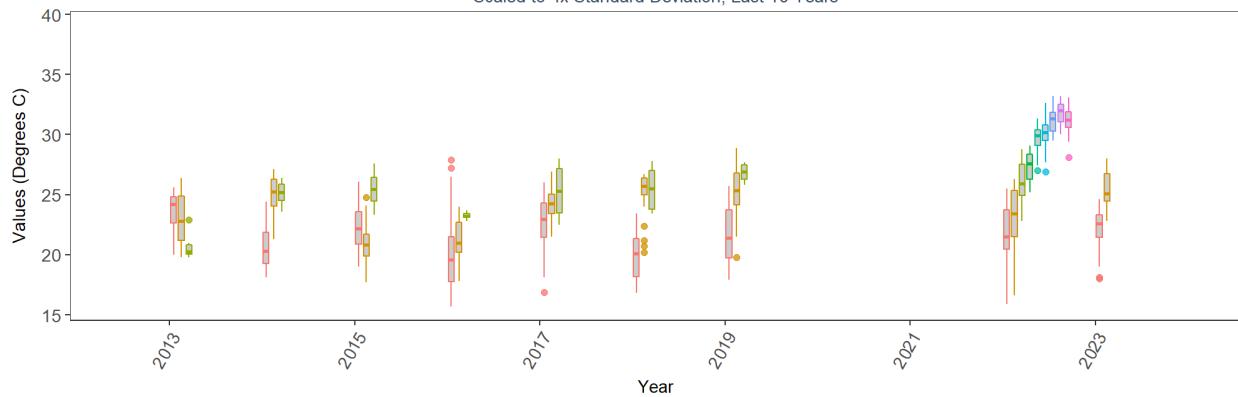


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 7  
 National Water Information System  
 255654081350200  
 By Month

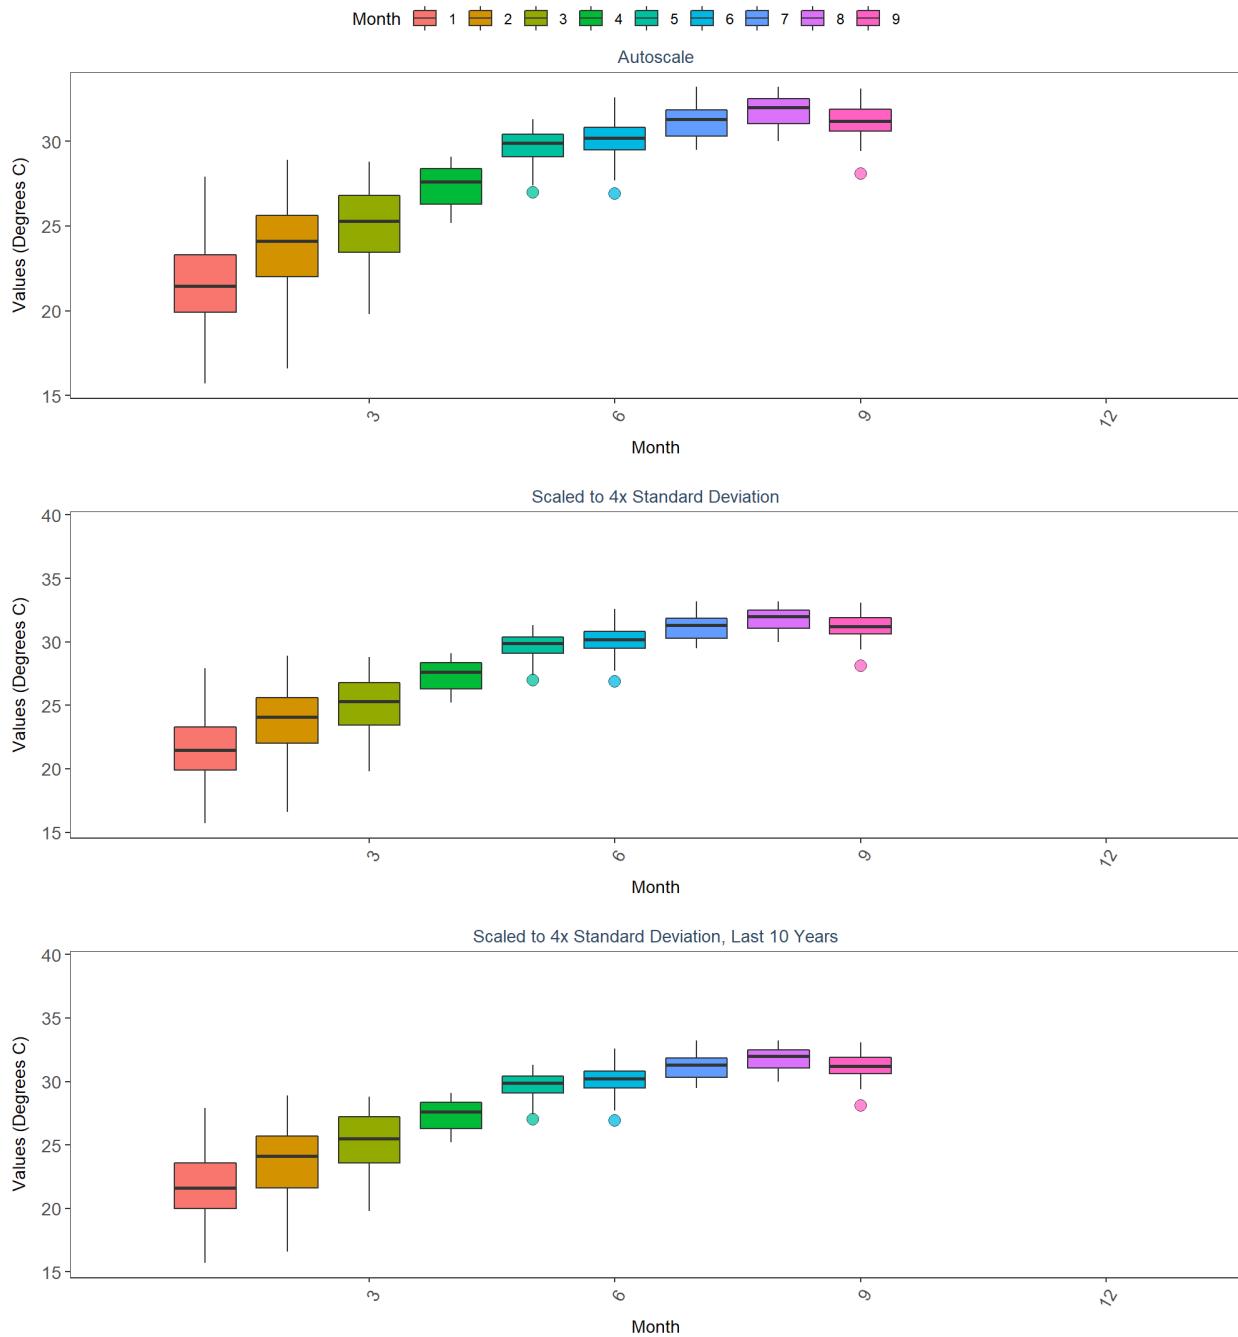


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbwq  
 By Year

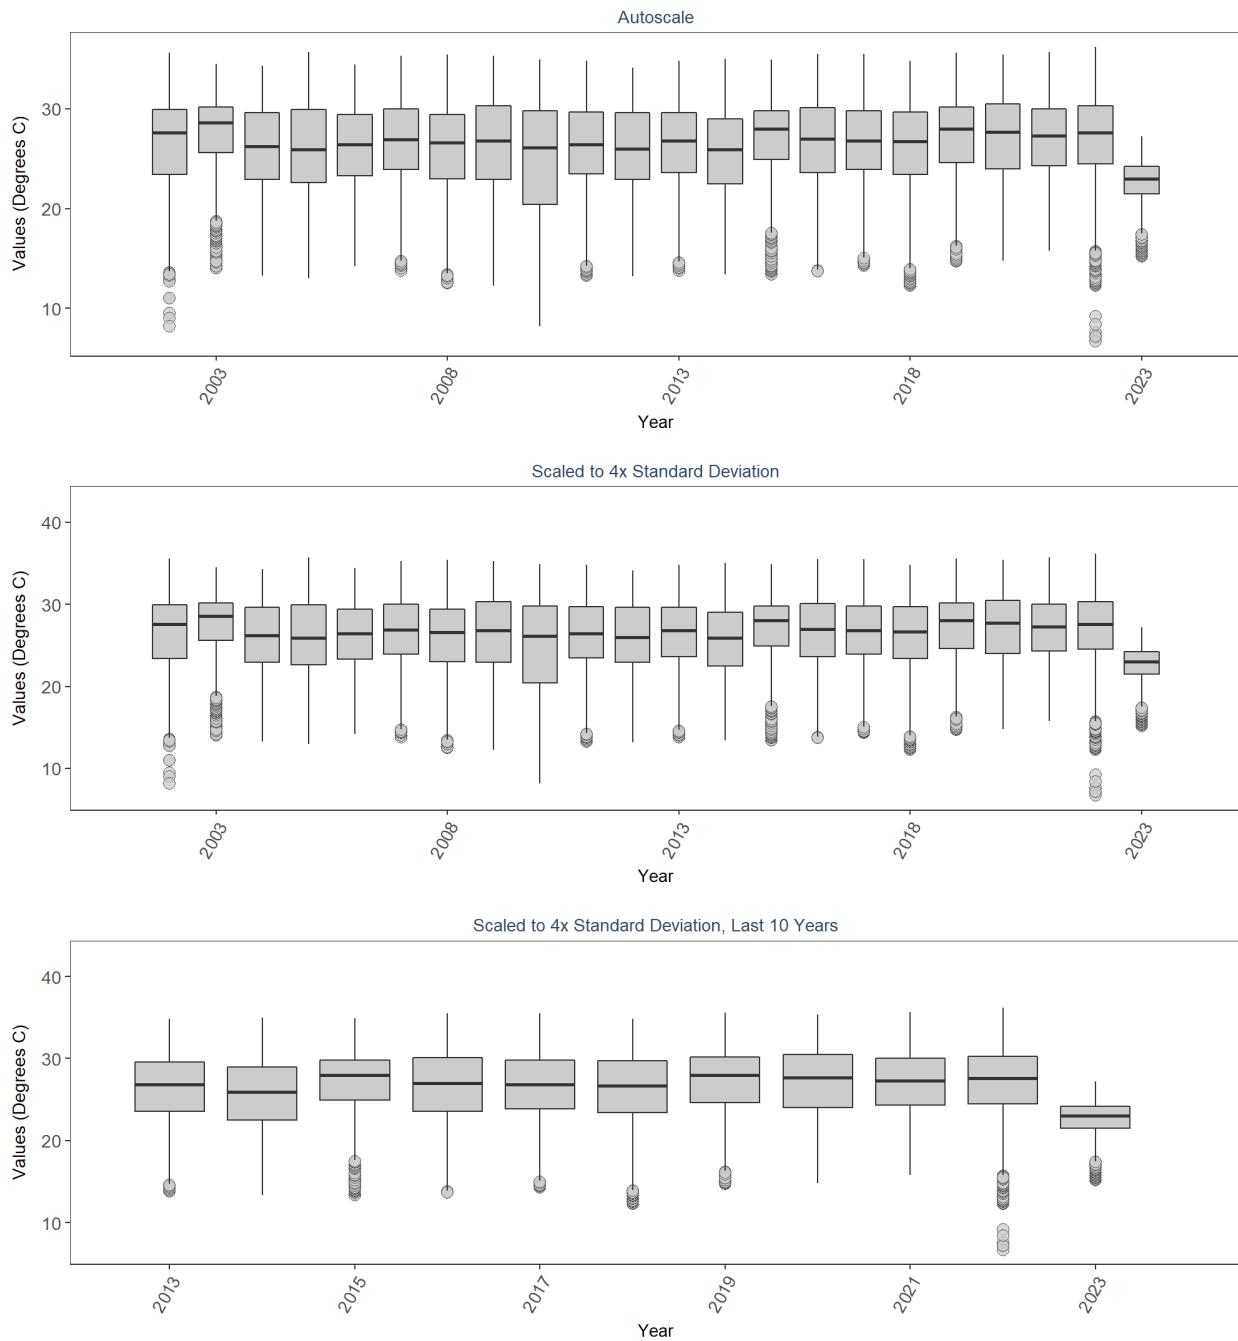


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbwq  
 By Year & Month

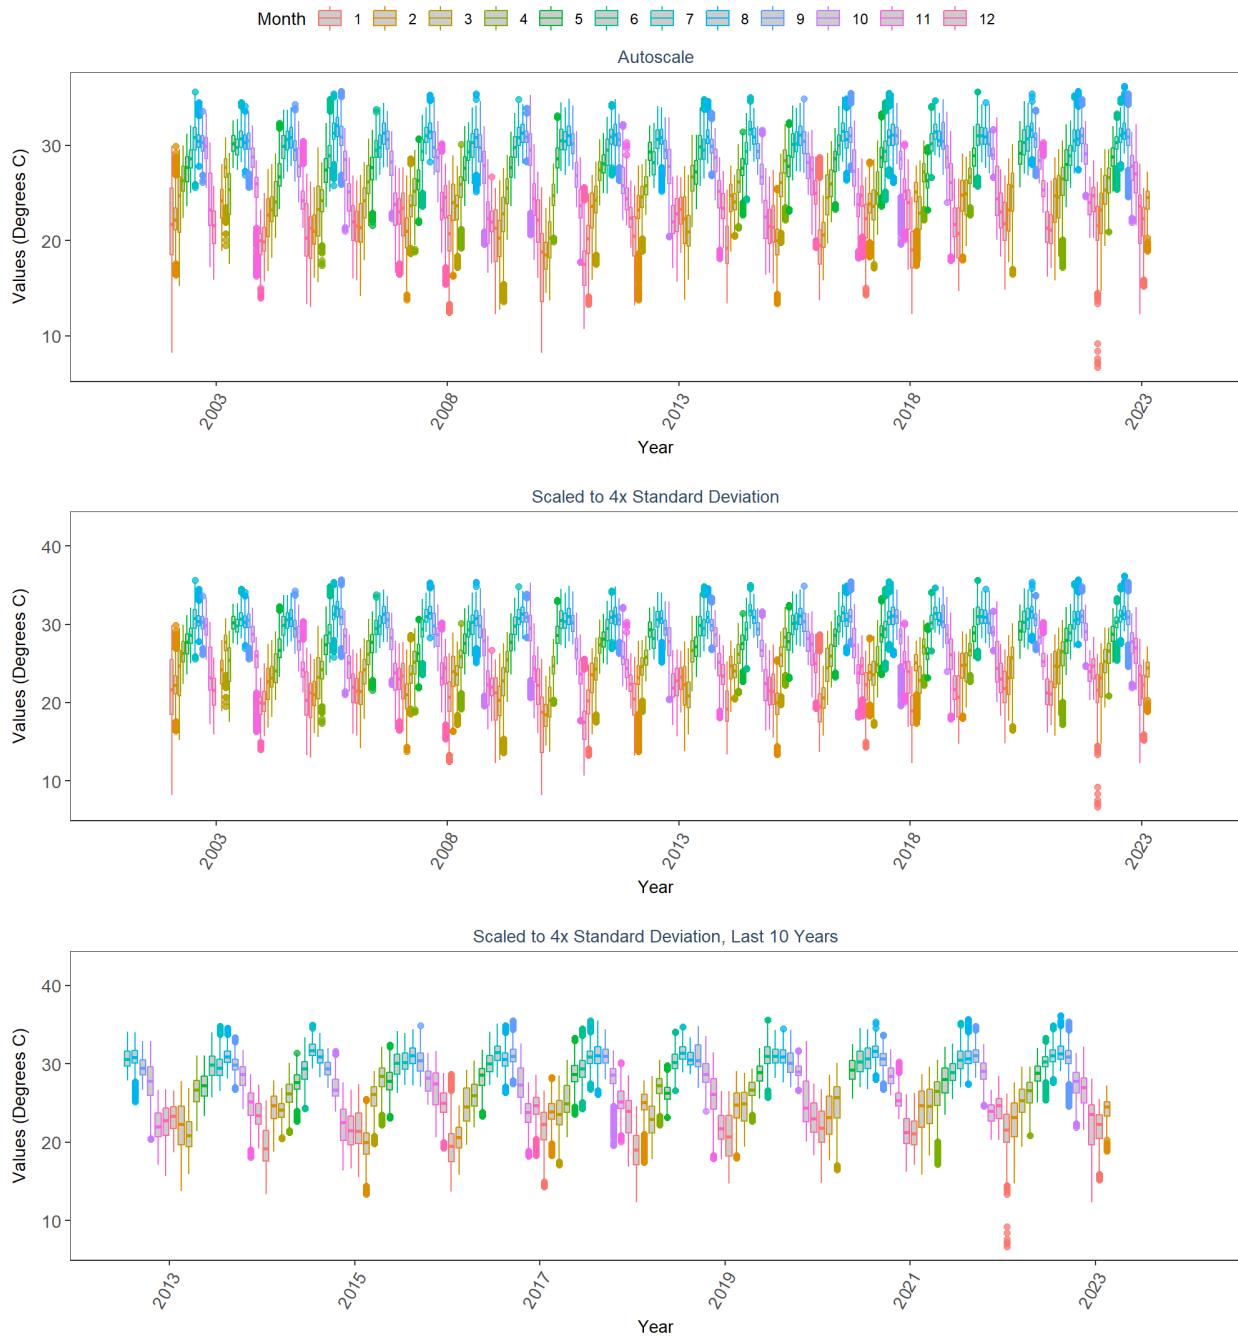


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbfwq  
 By Month

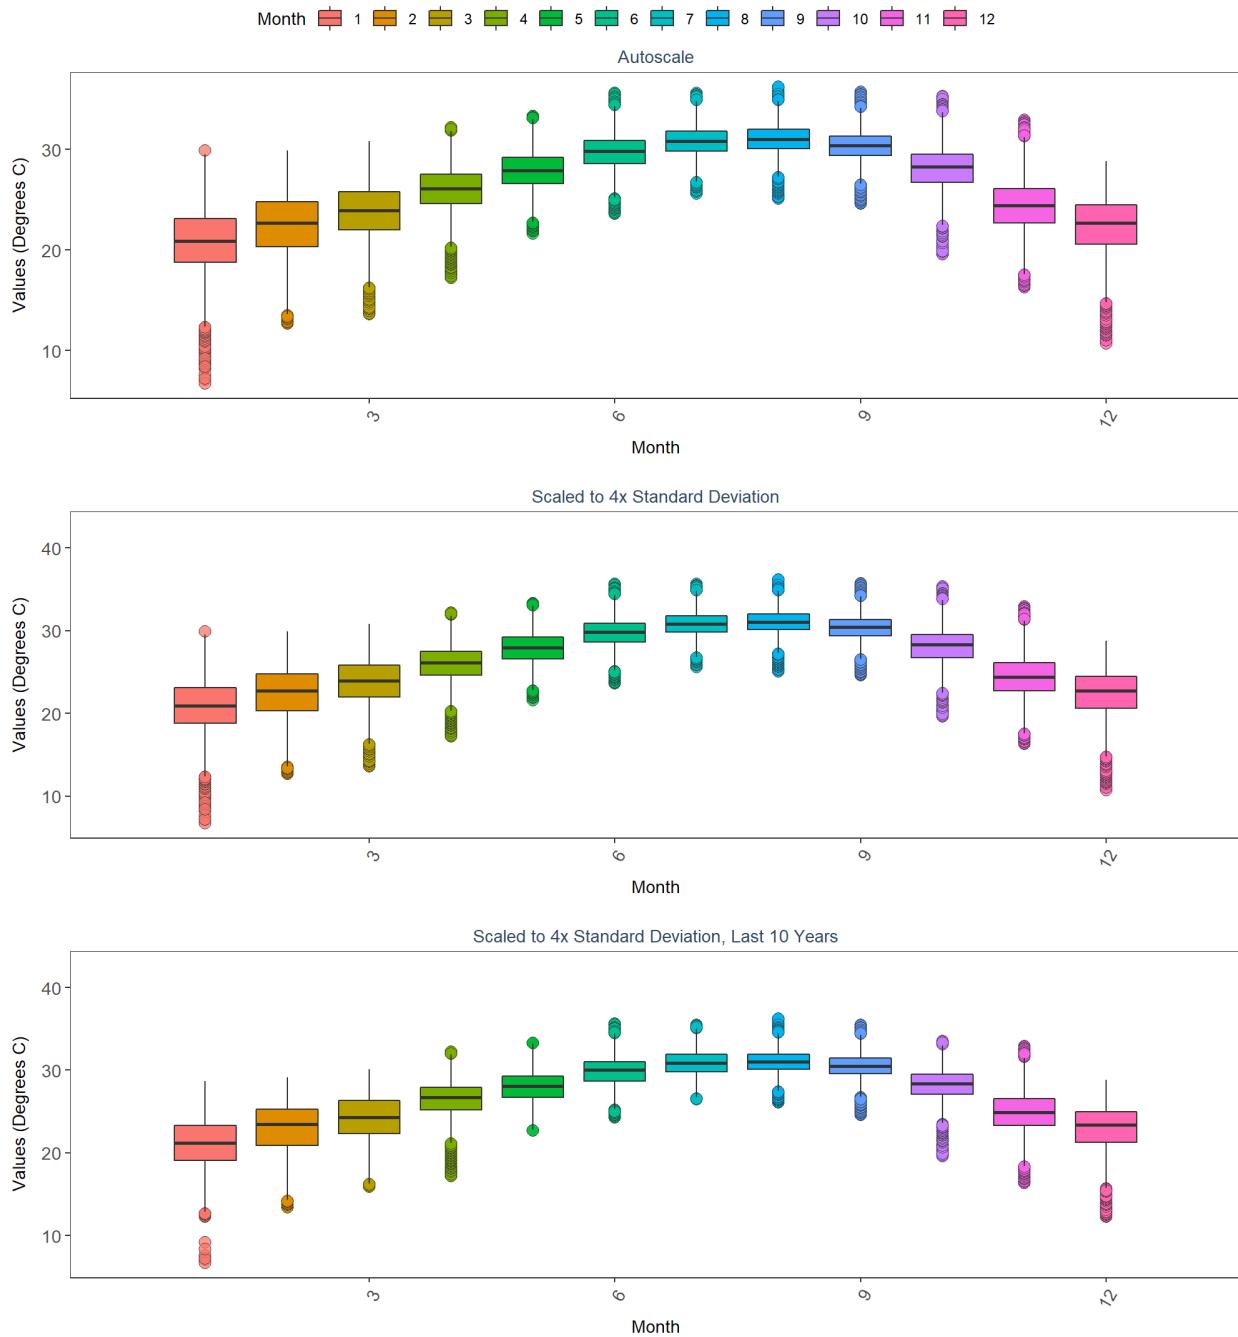


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 By Year

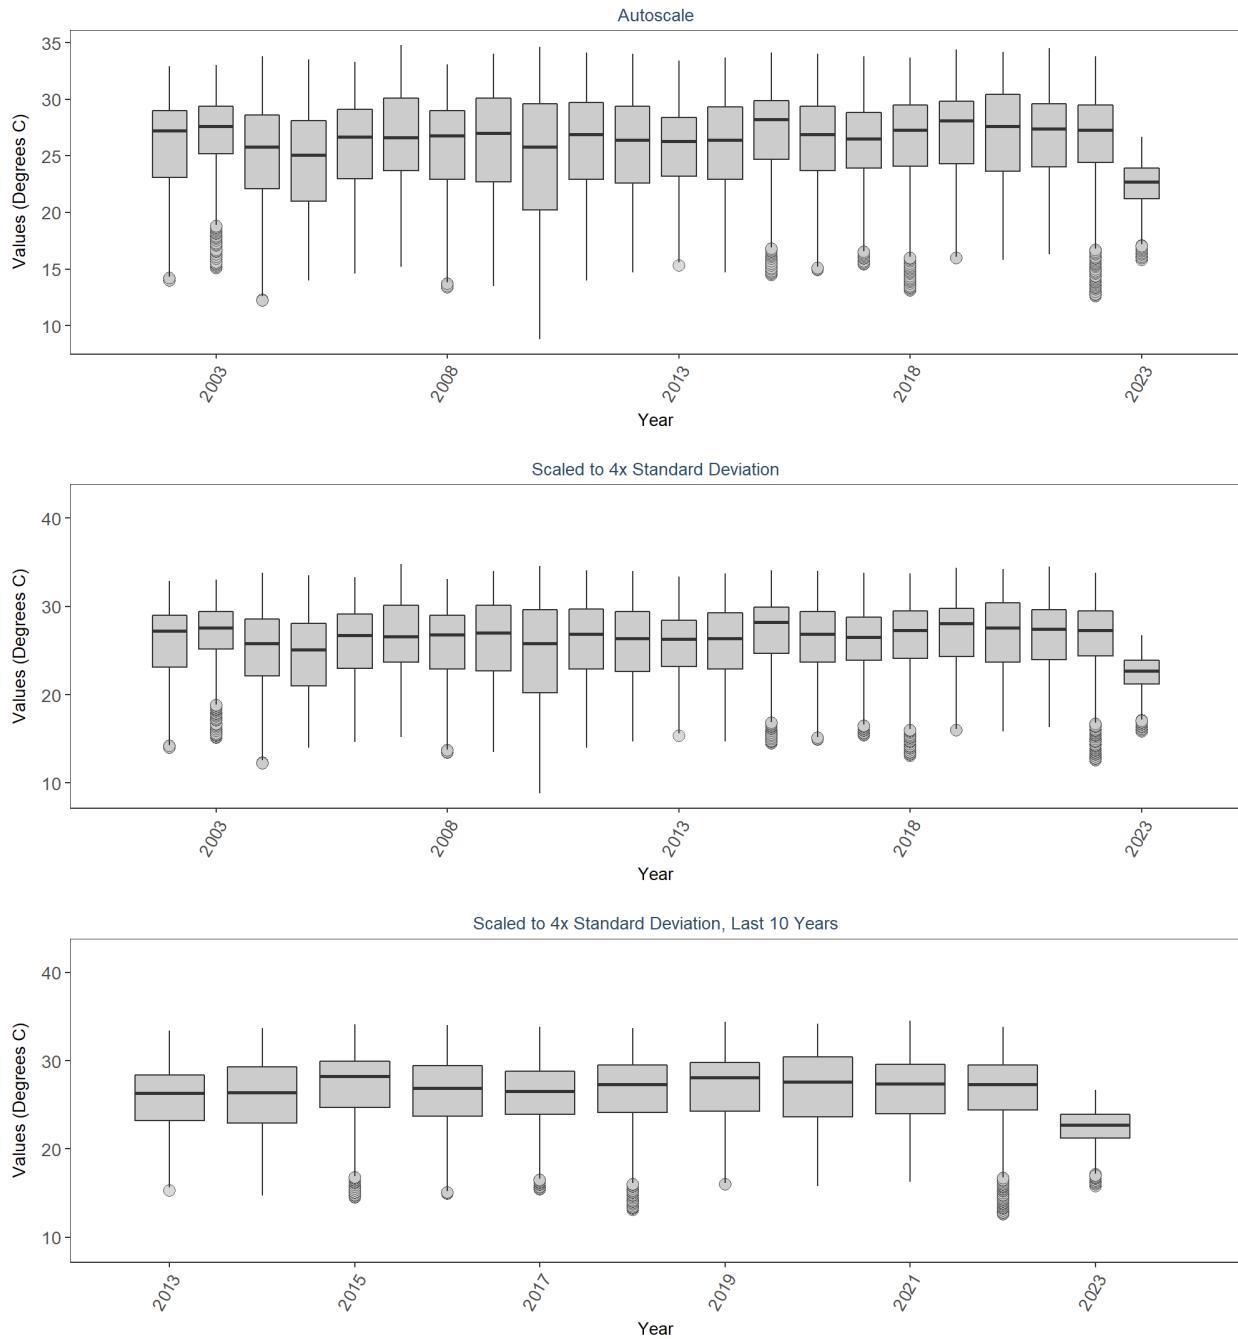


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 By Year & Month

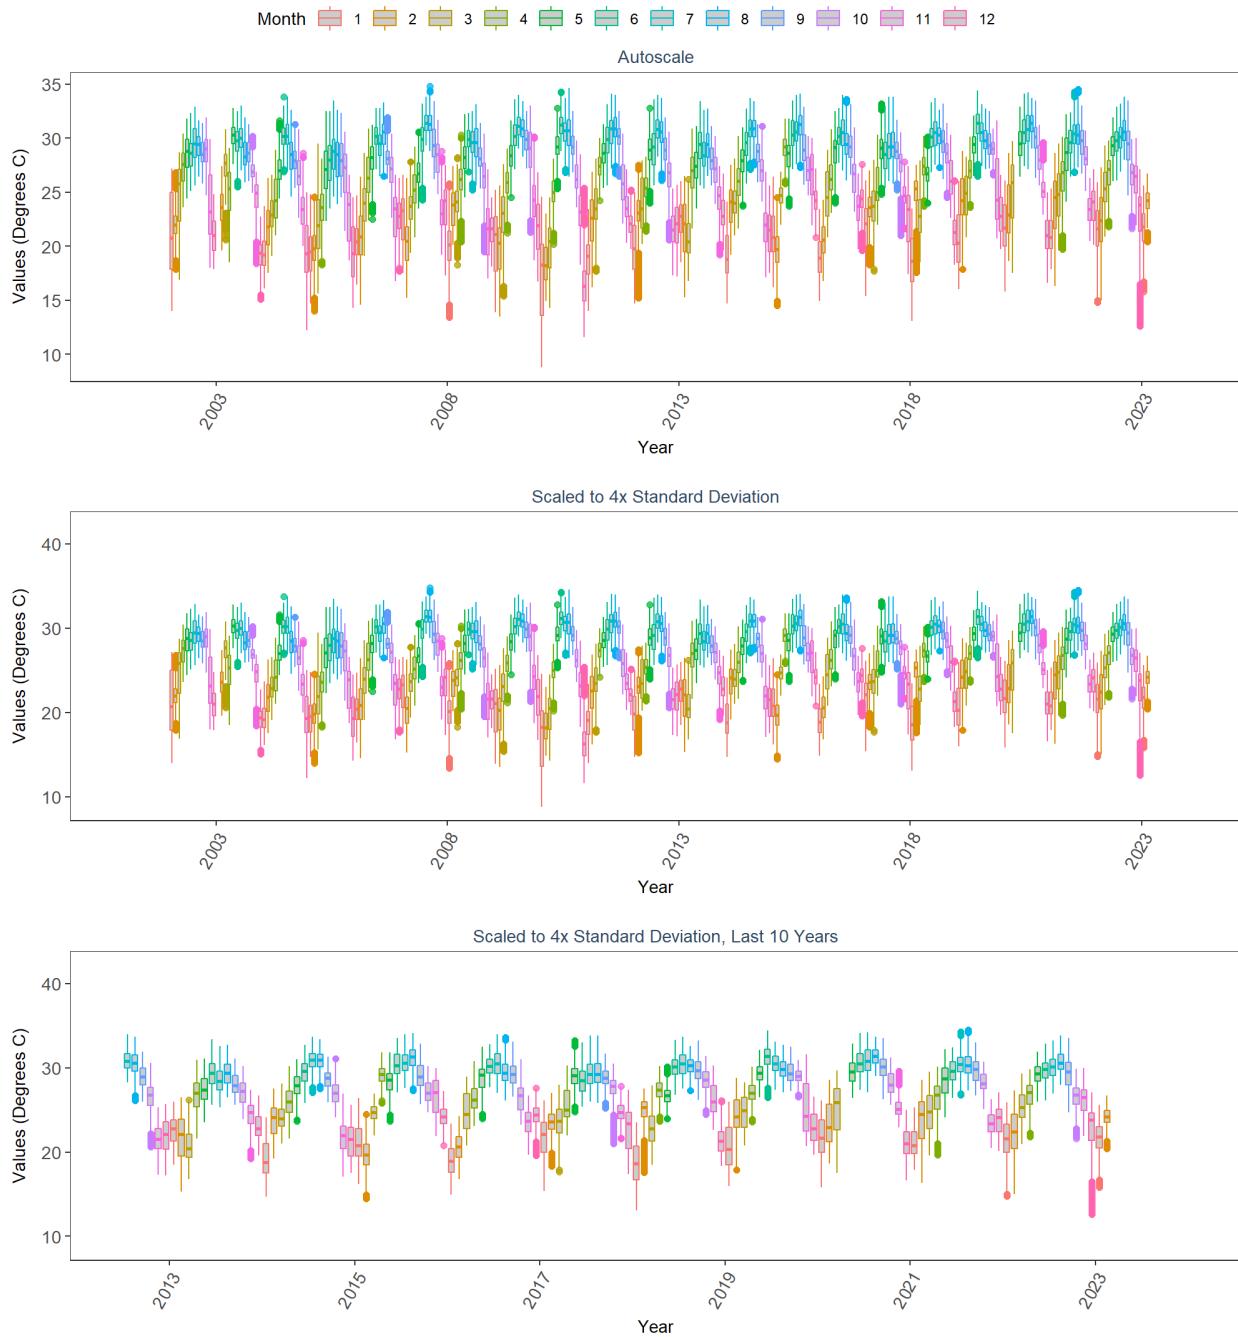


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 By Month

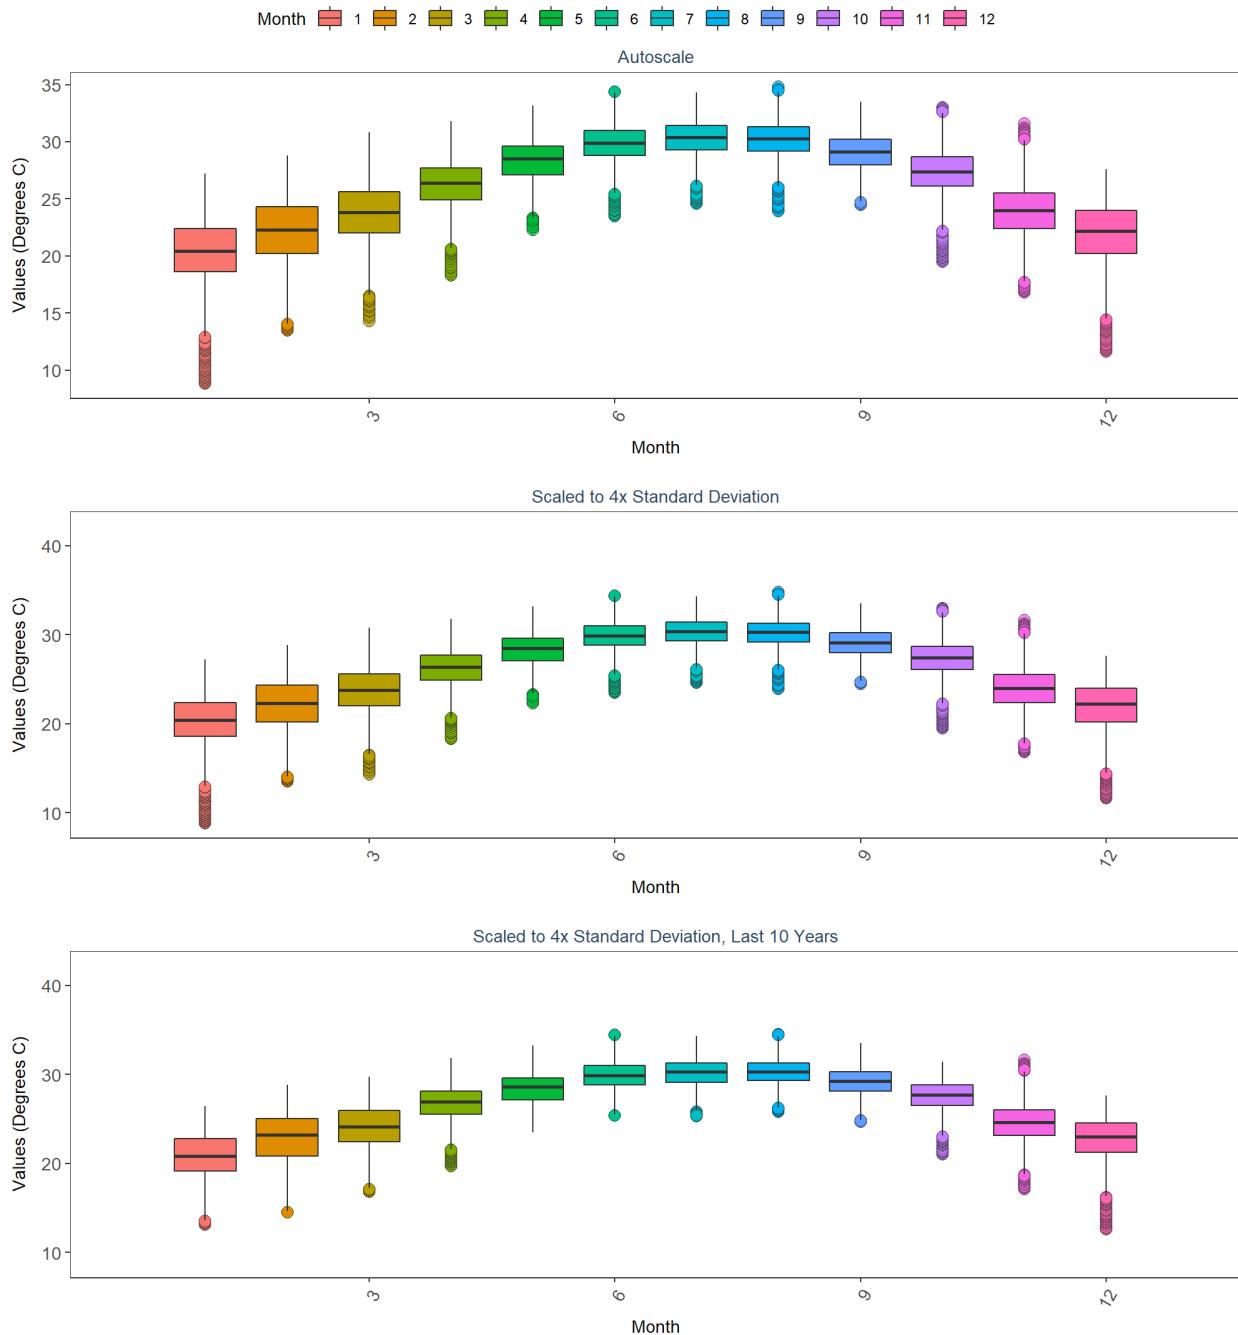


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbmbwq  
 By Year

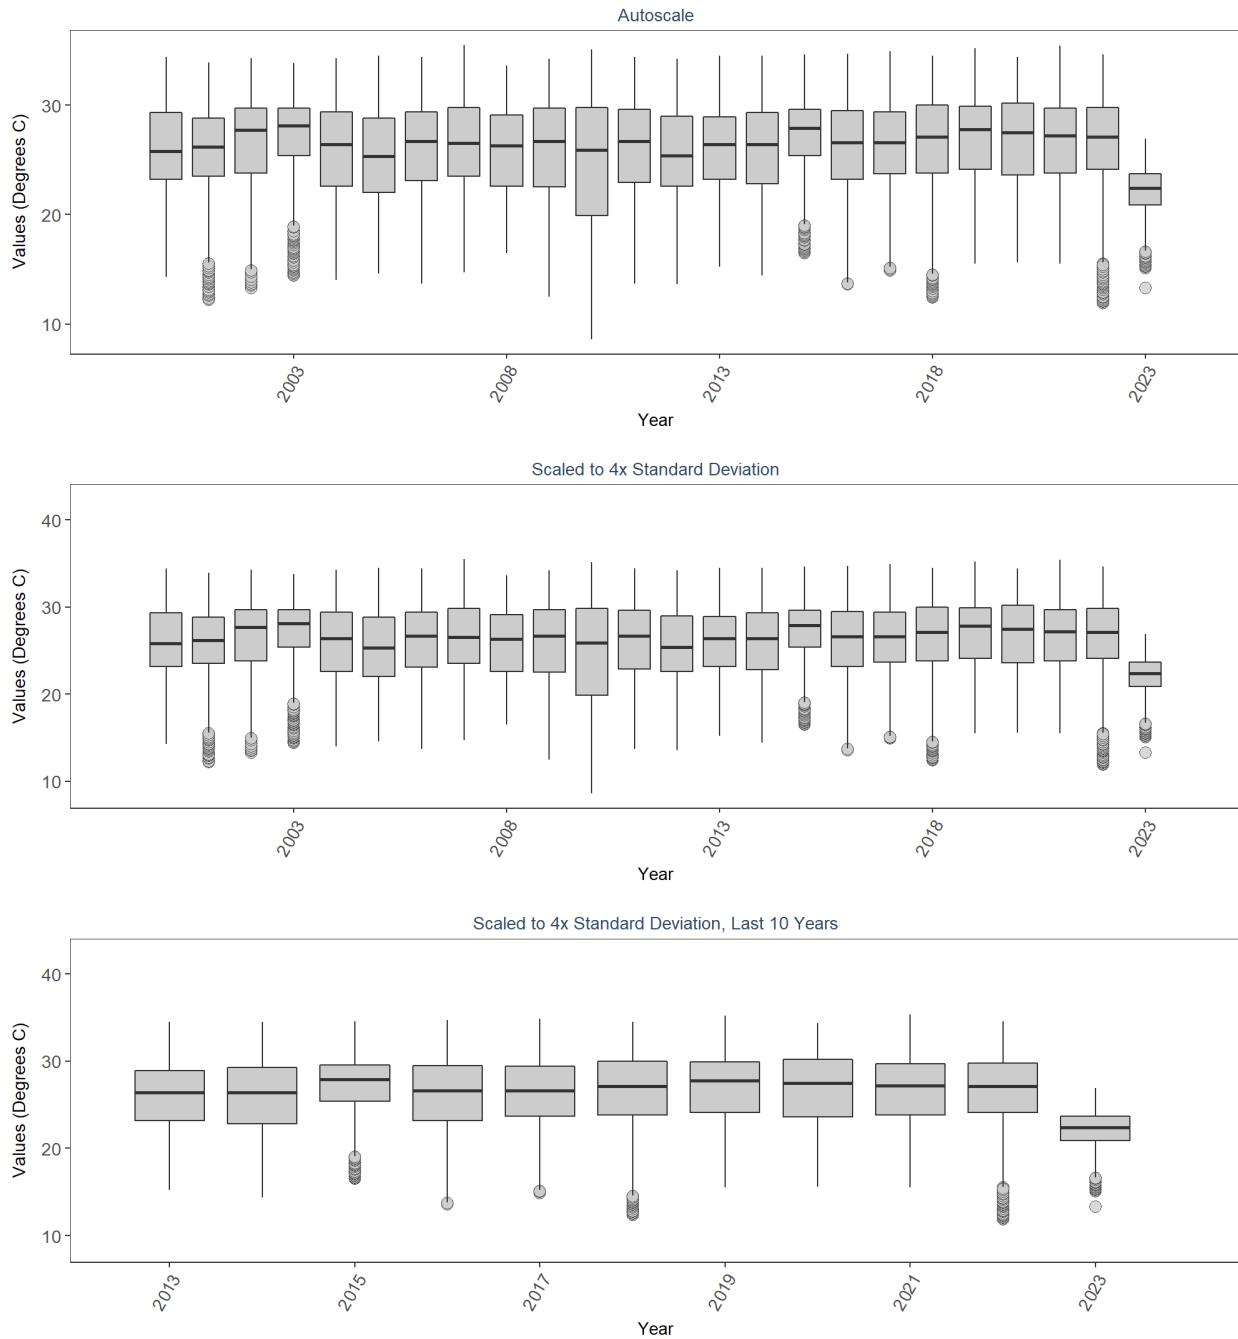


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbmbwq  
 By Year & Month

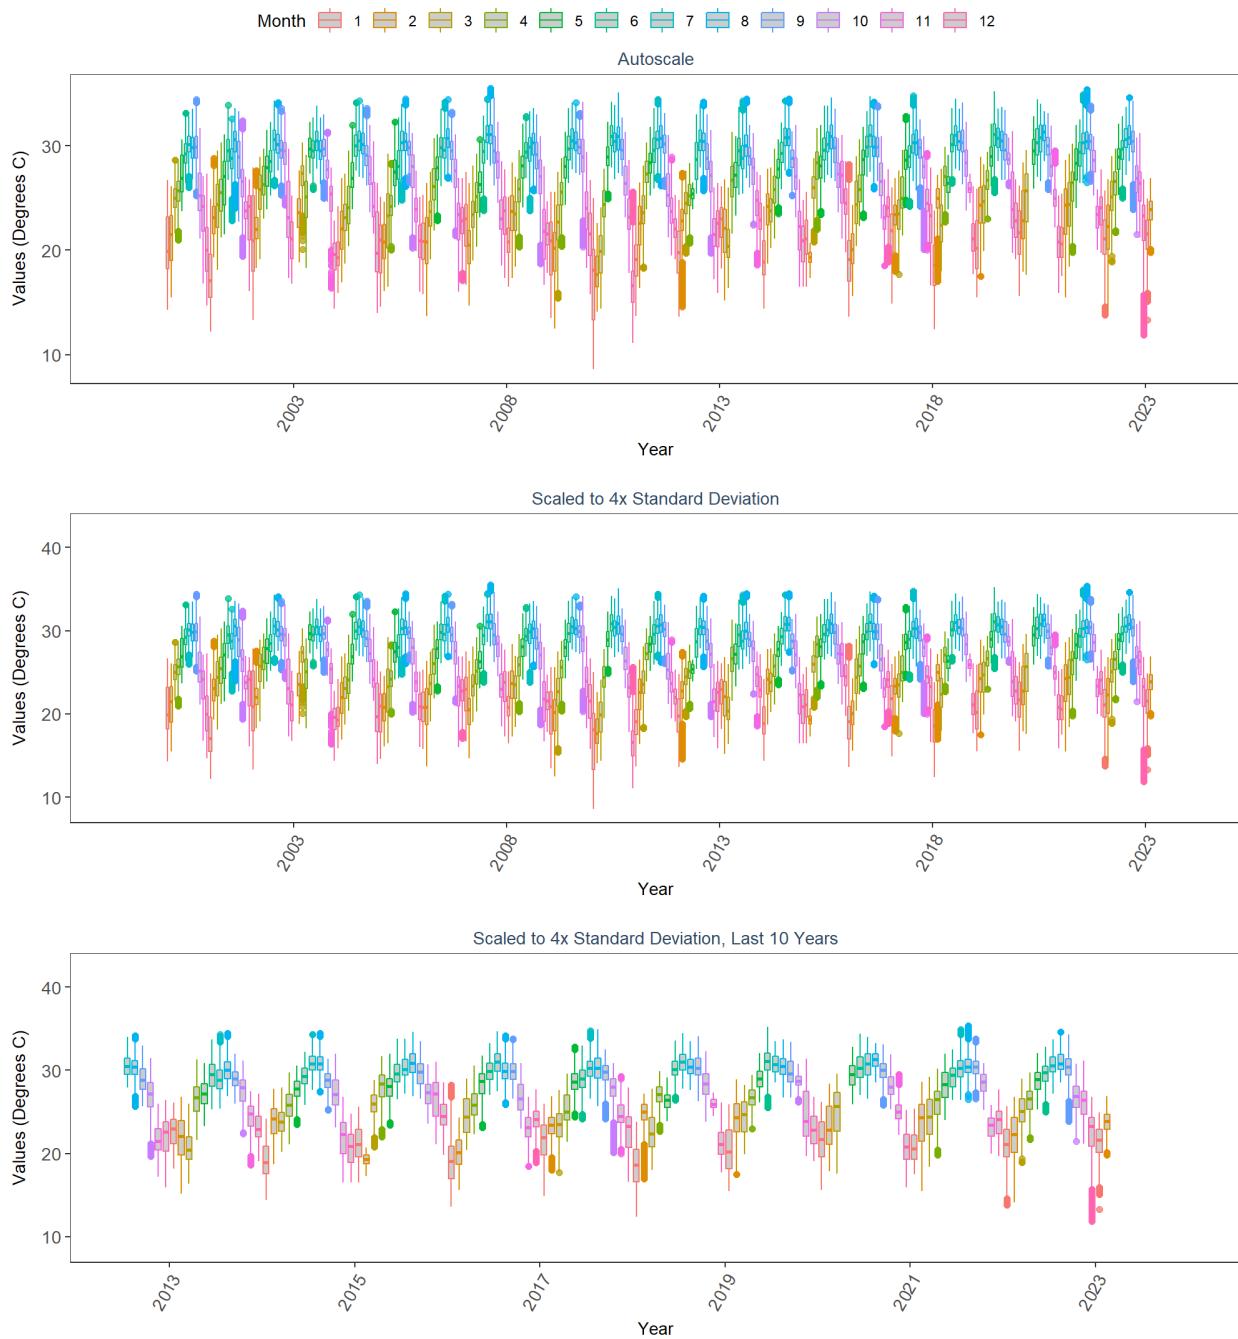


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbmbwq  
 By Month

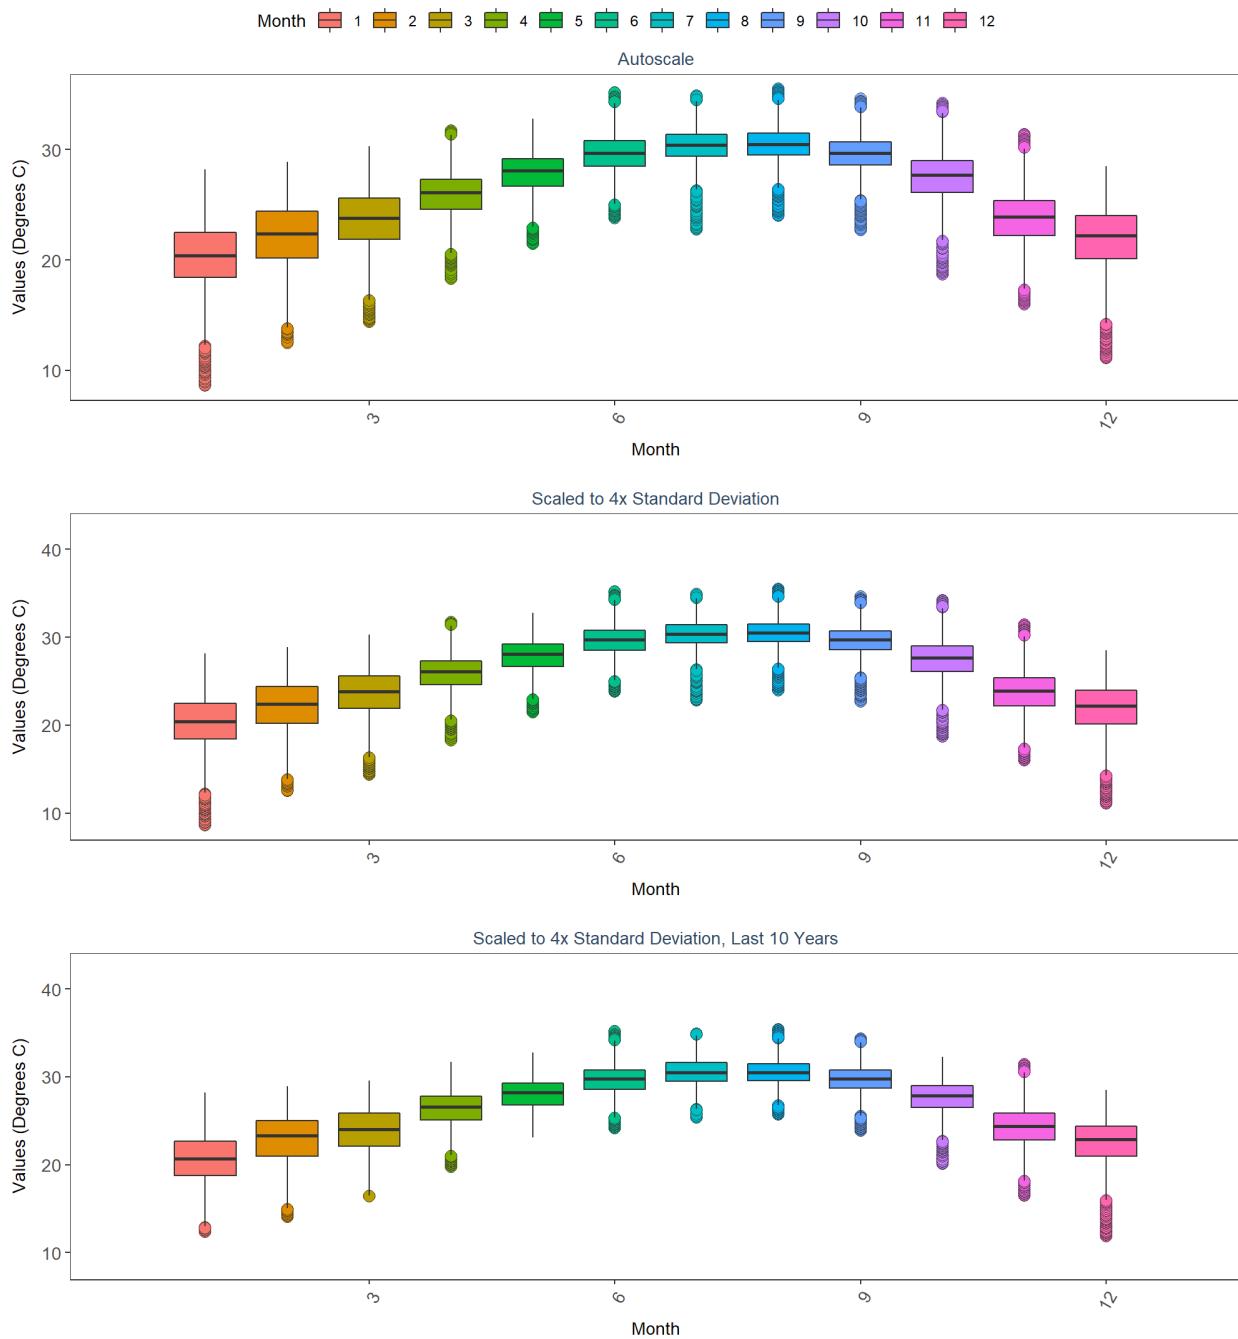


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkppbwq  
 By Year

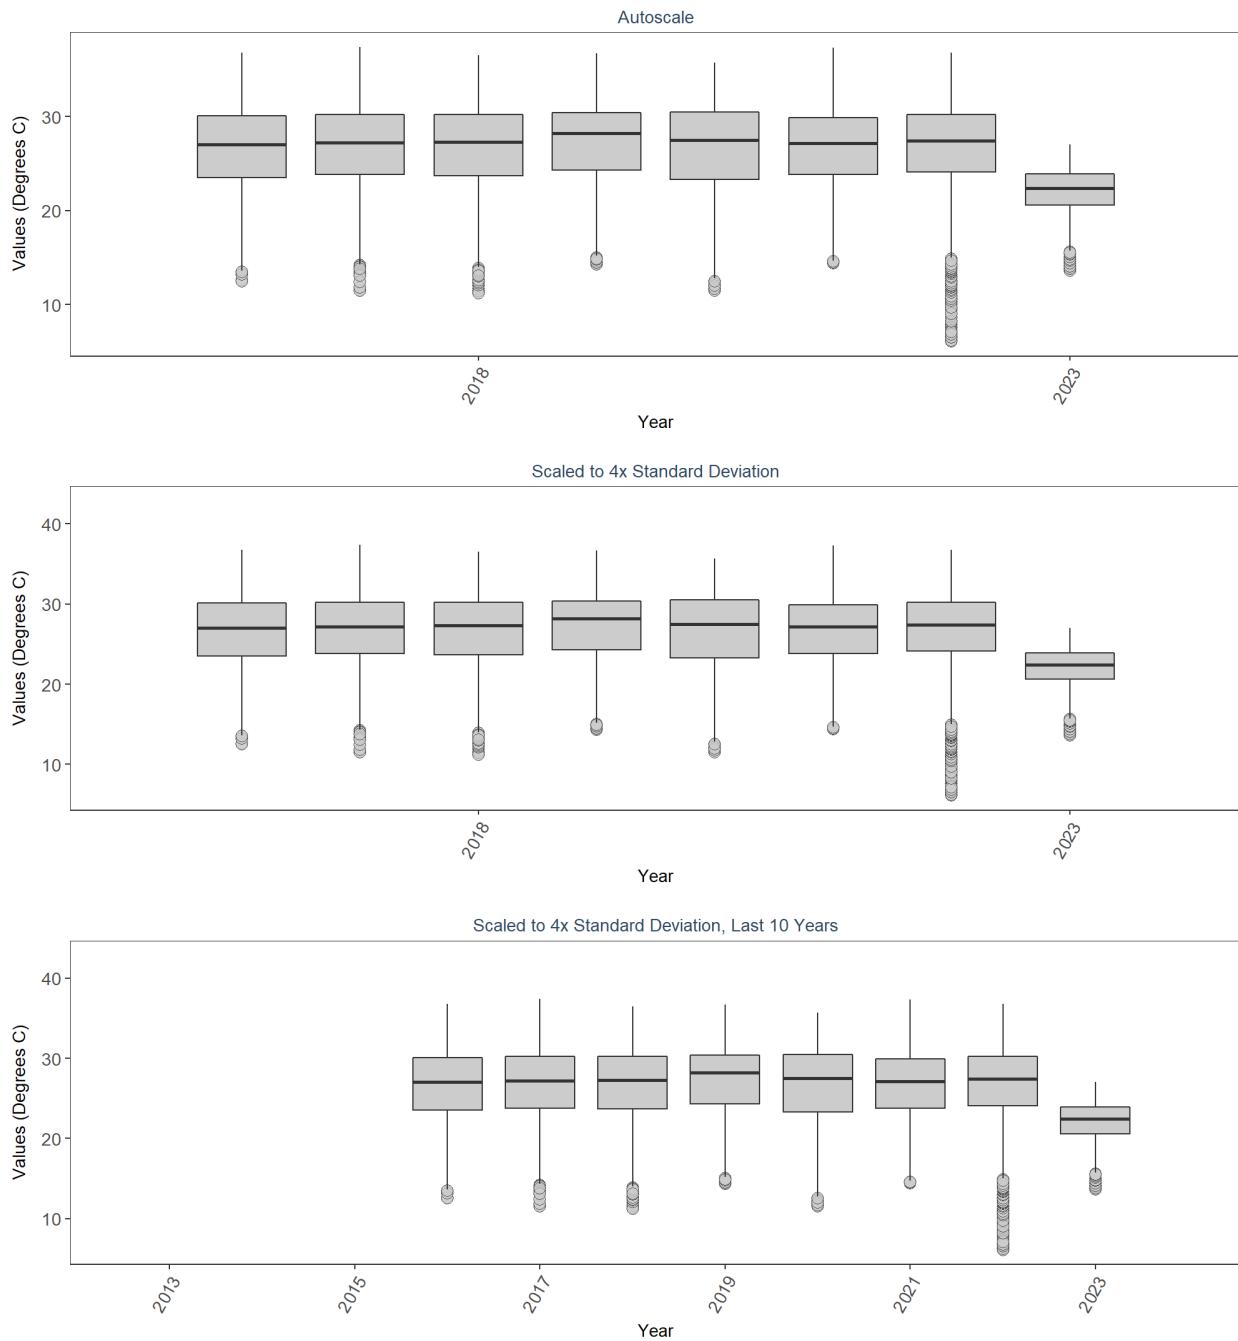


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbpbwq  
 By Year & Month

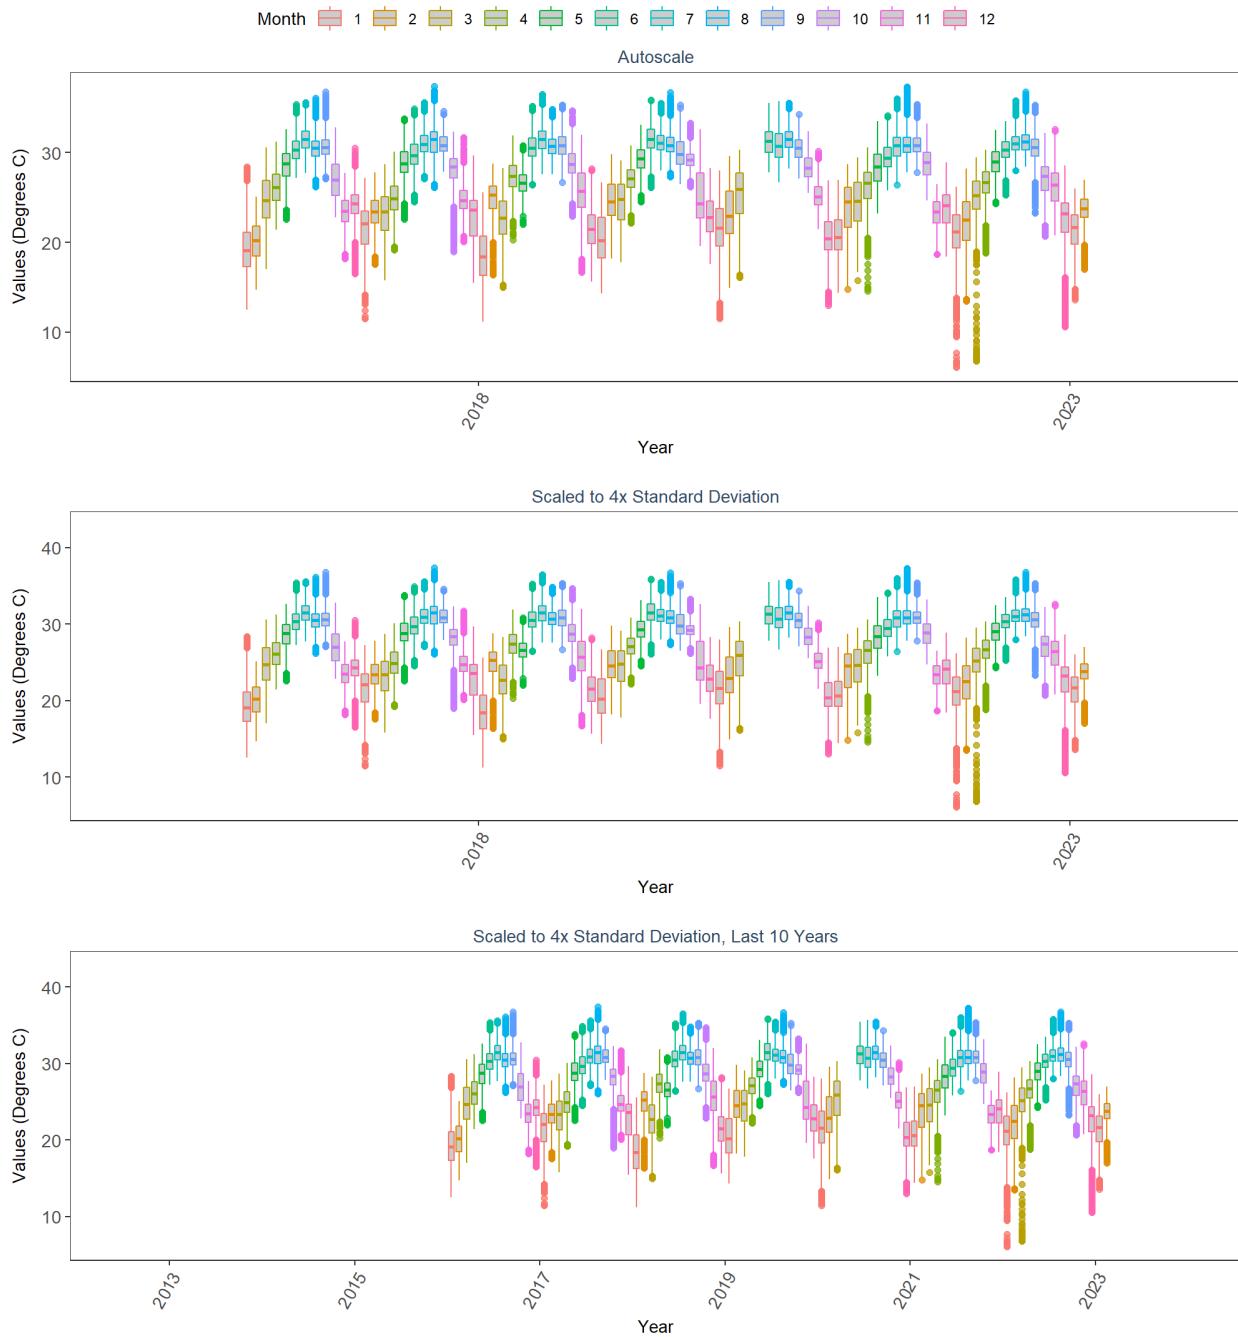


Cape Romano-Ten Thousand Islands Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbpbwq  
 By Month

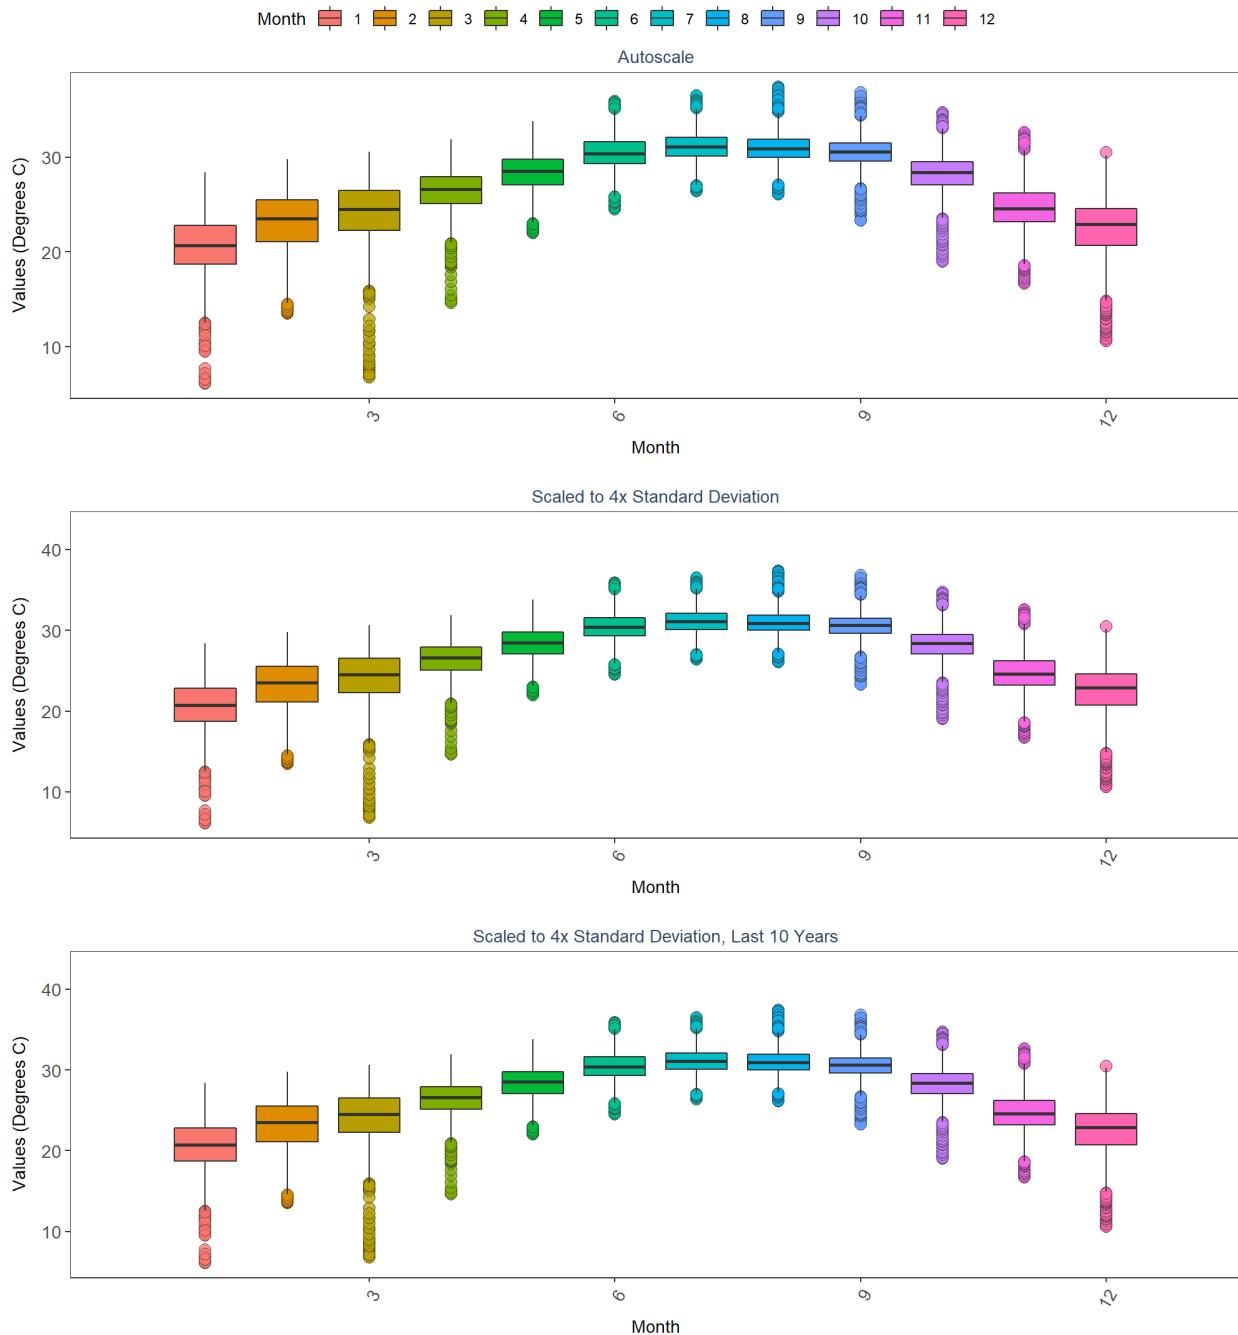


Estero Bay Aquatic Preserve  
474  
Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
EB01  
By Year

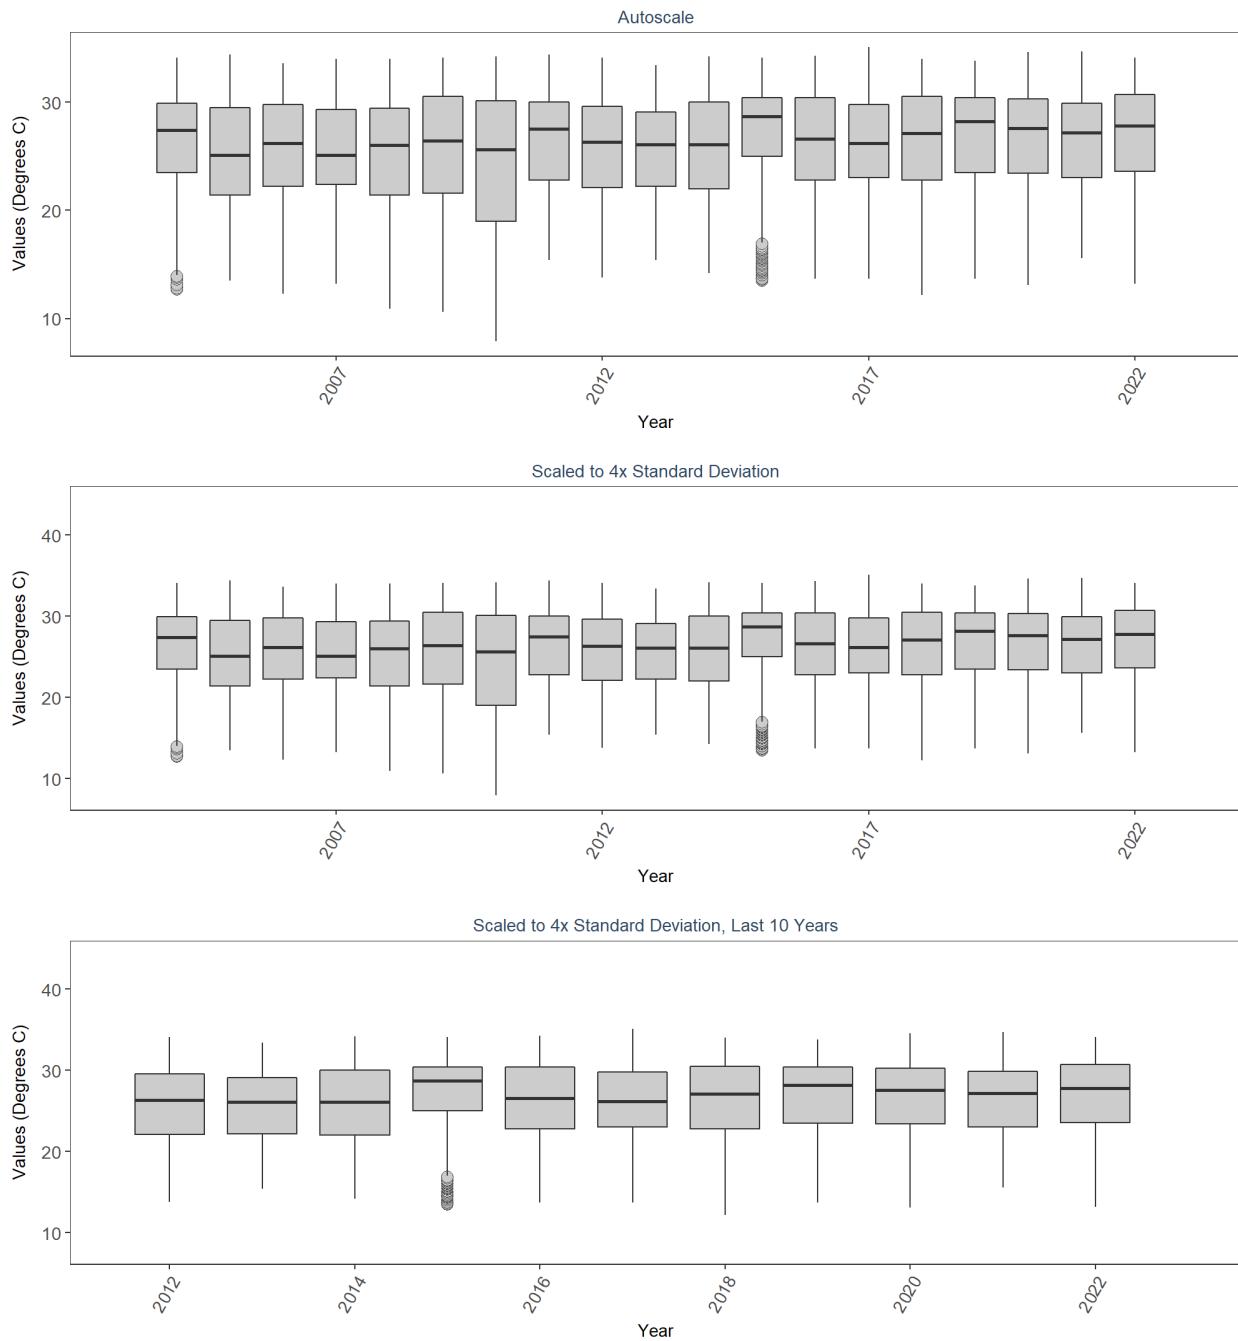


**Estero Bay Aquatic Preserve**  
**474**  
**Estero Bay Aquatic Preserve Continuous Water Quality Monitoring**  
**EB01**  
**By Year & Month**

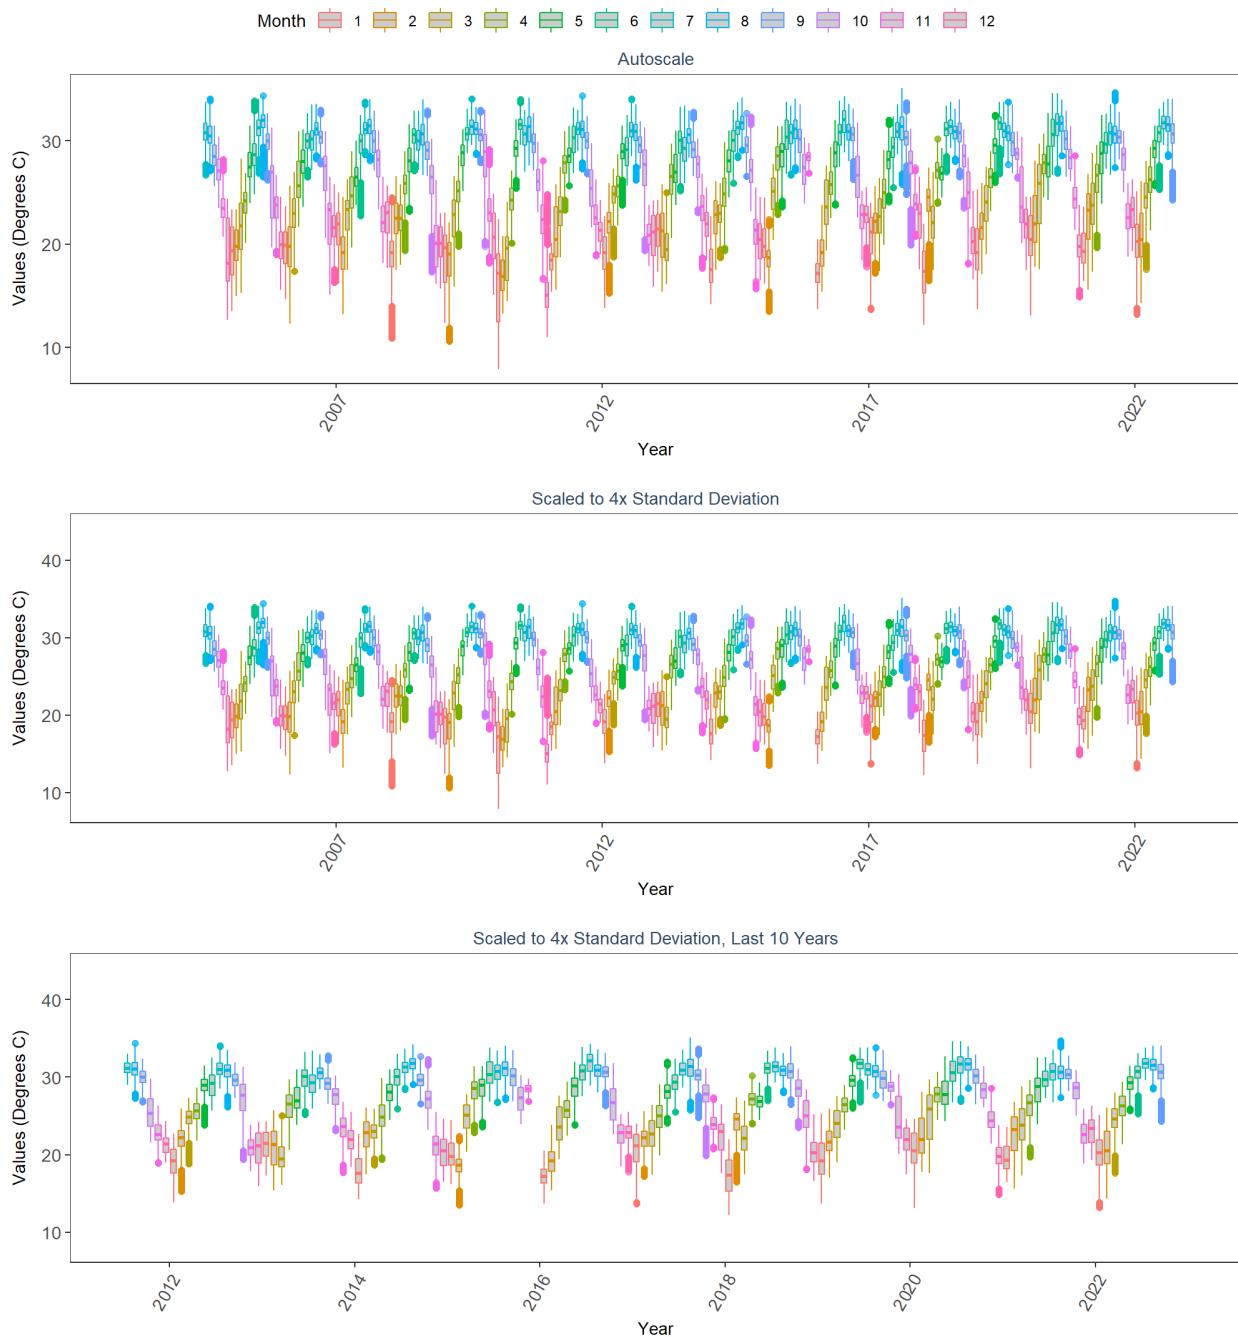


Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB01  
 By Month

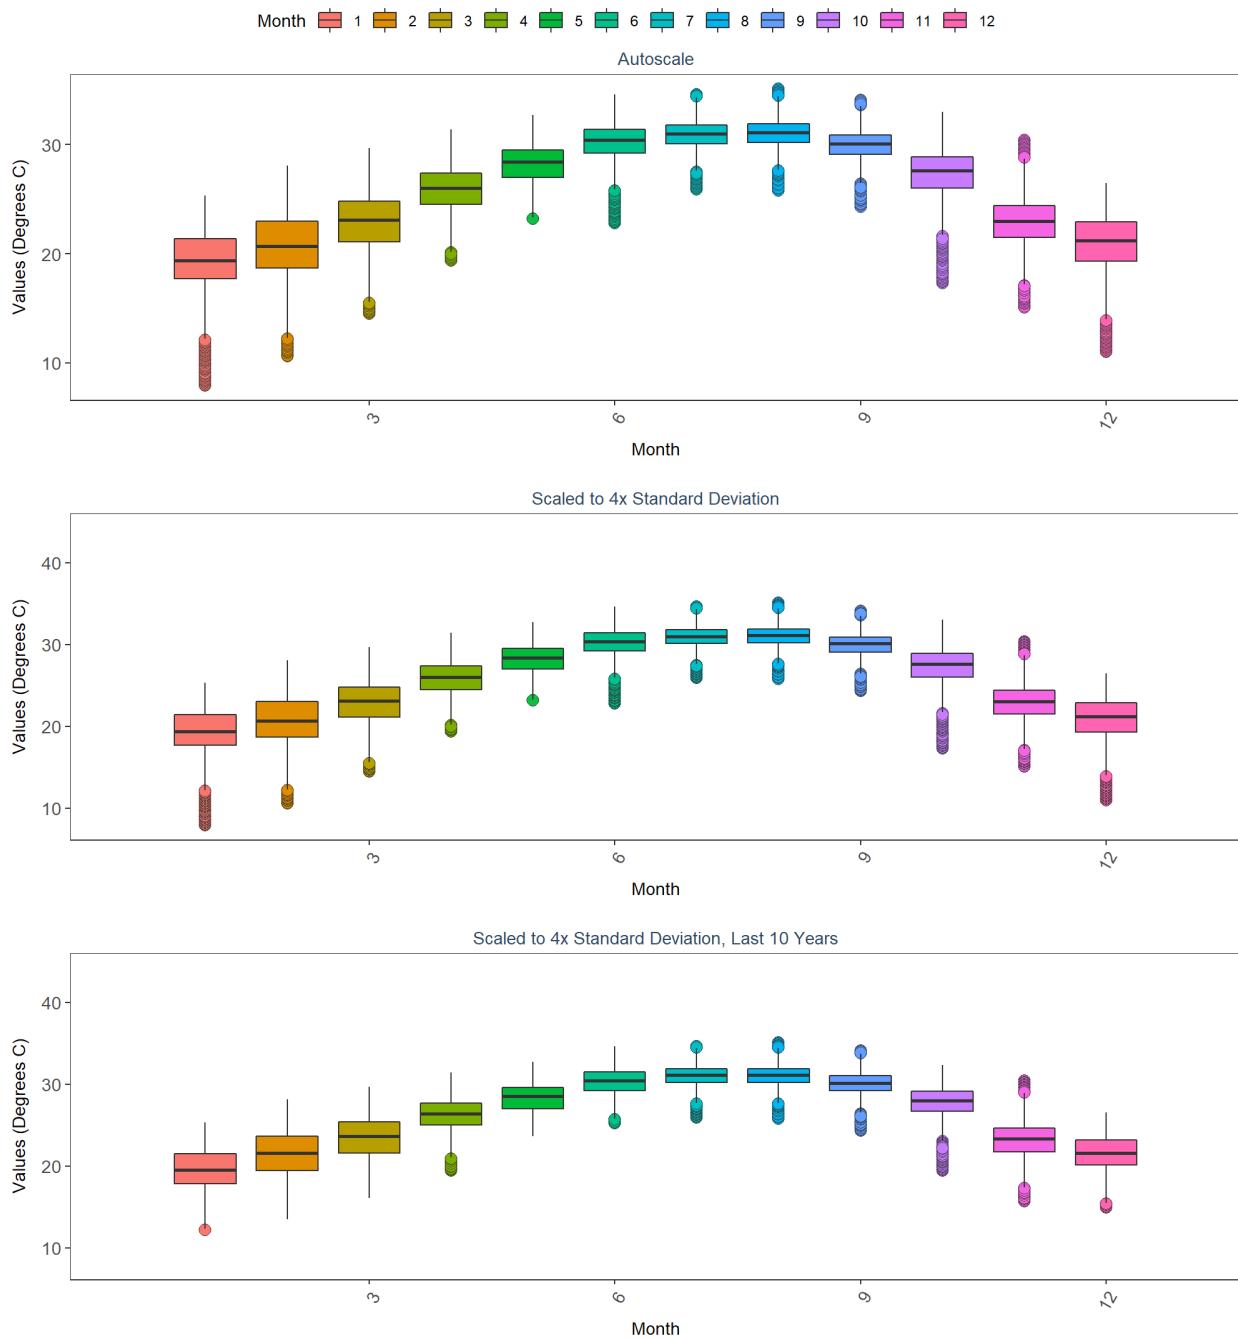


Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB02  
 By Year

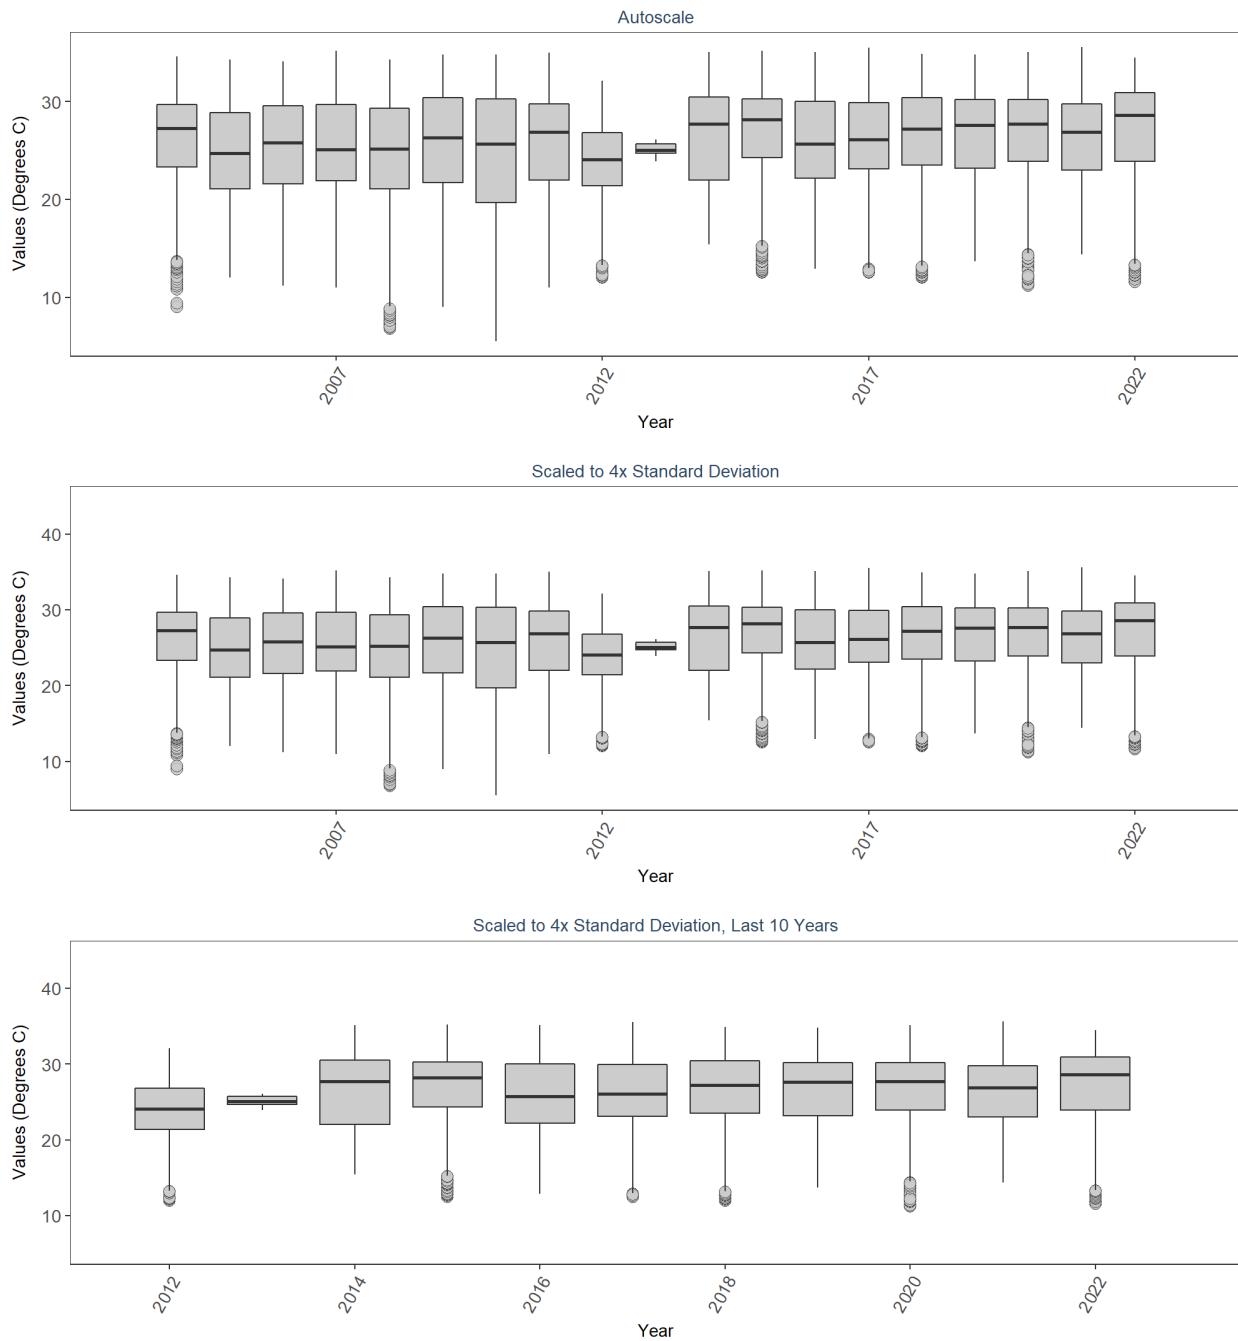


**Estero Bay Aquatic Preserve**  
**474**  
**Estero Bay Aquatic Preserve Continuous Water Quality Monitoring**  
**EB02**  
**By Year & Month**

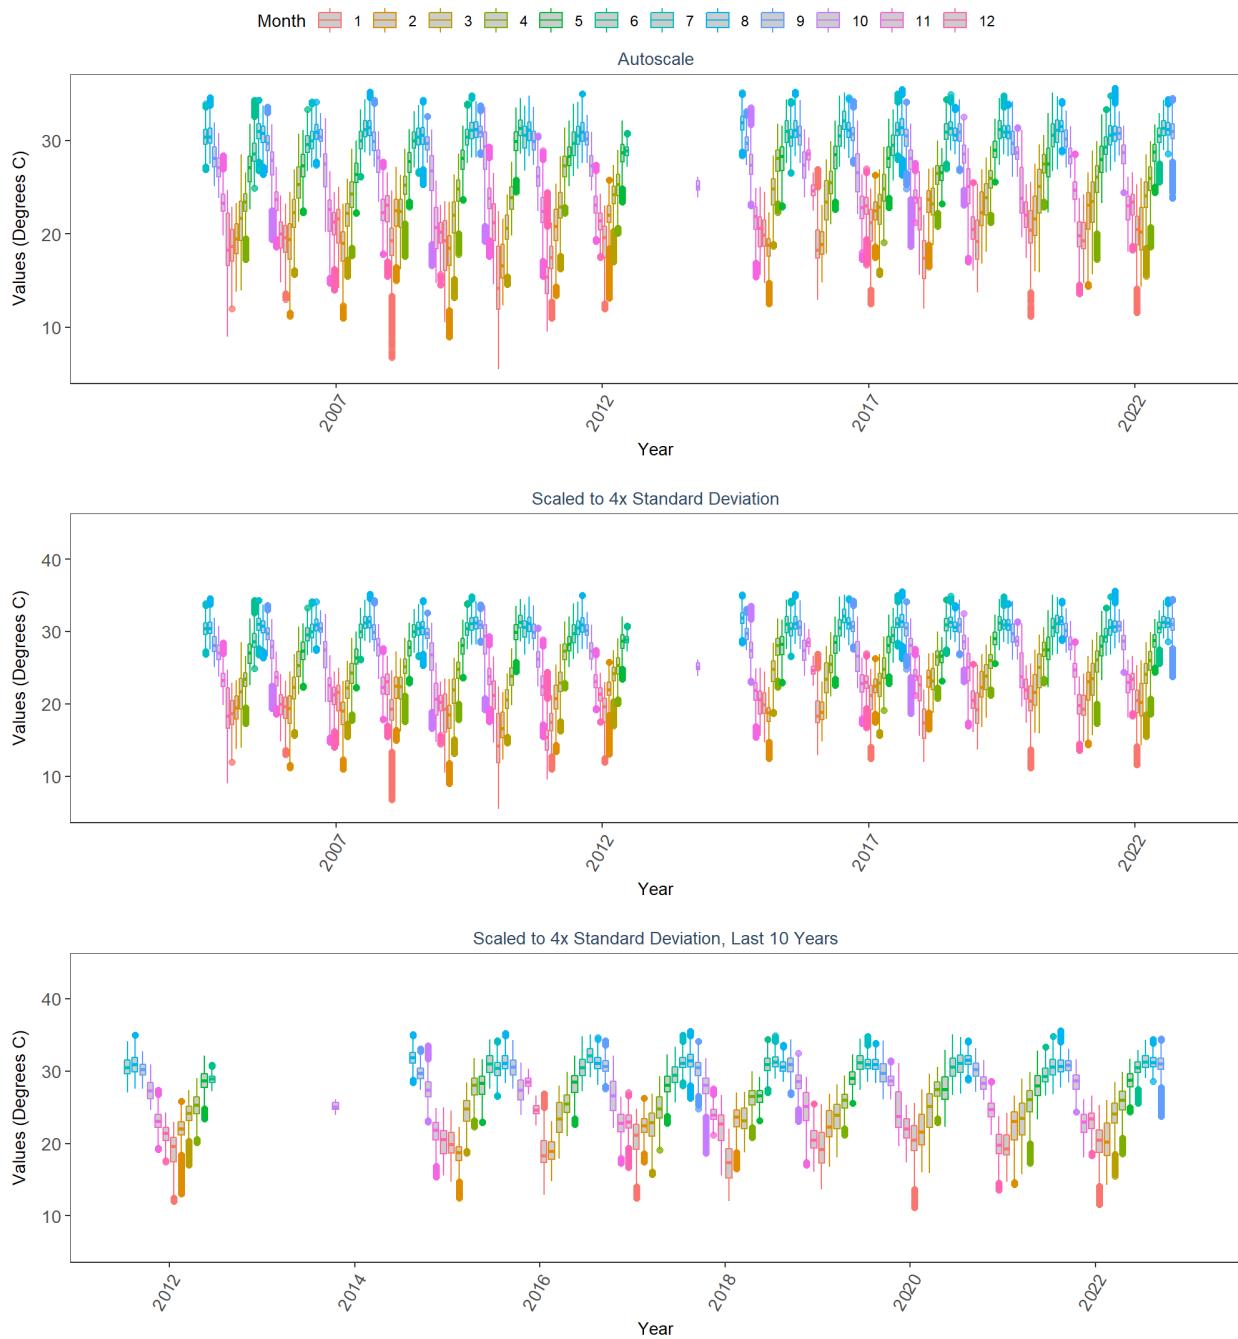


Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB02  
 By Month

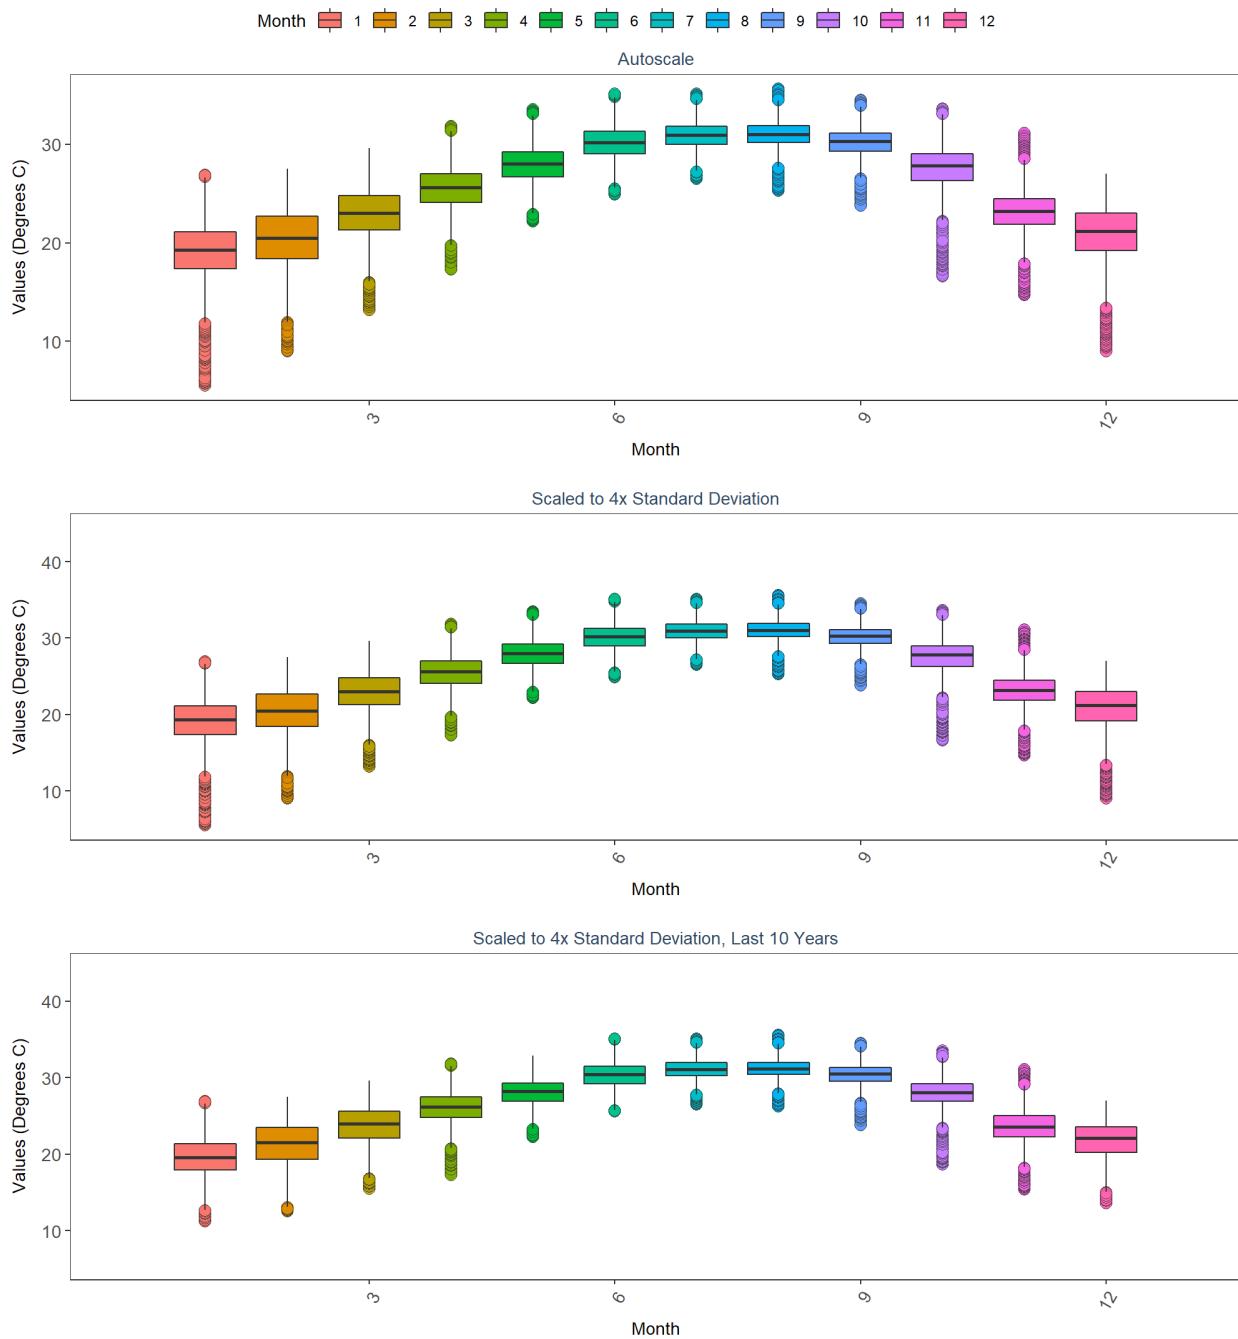




Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB03  
 By Year

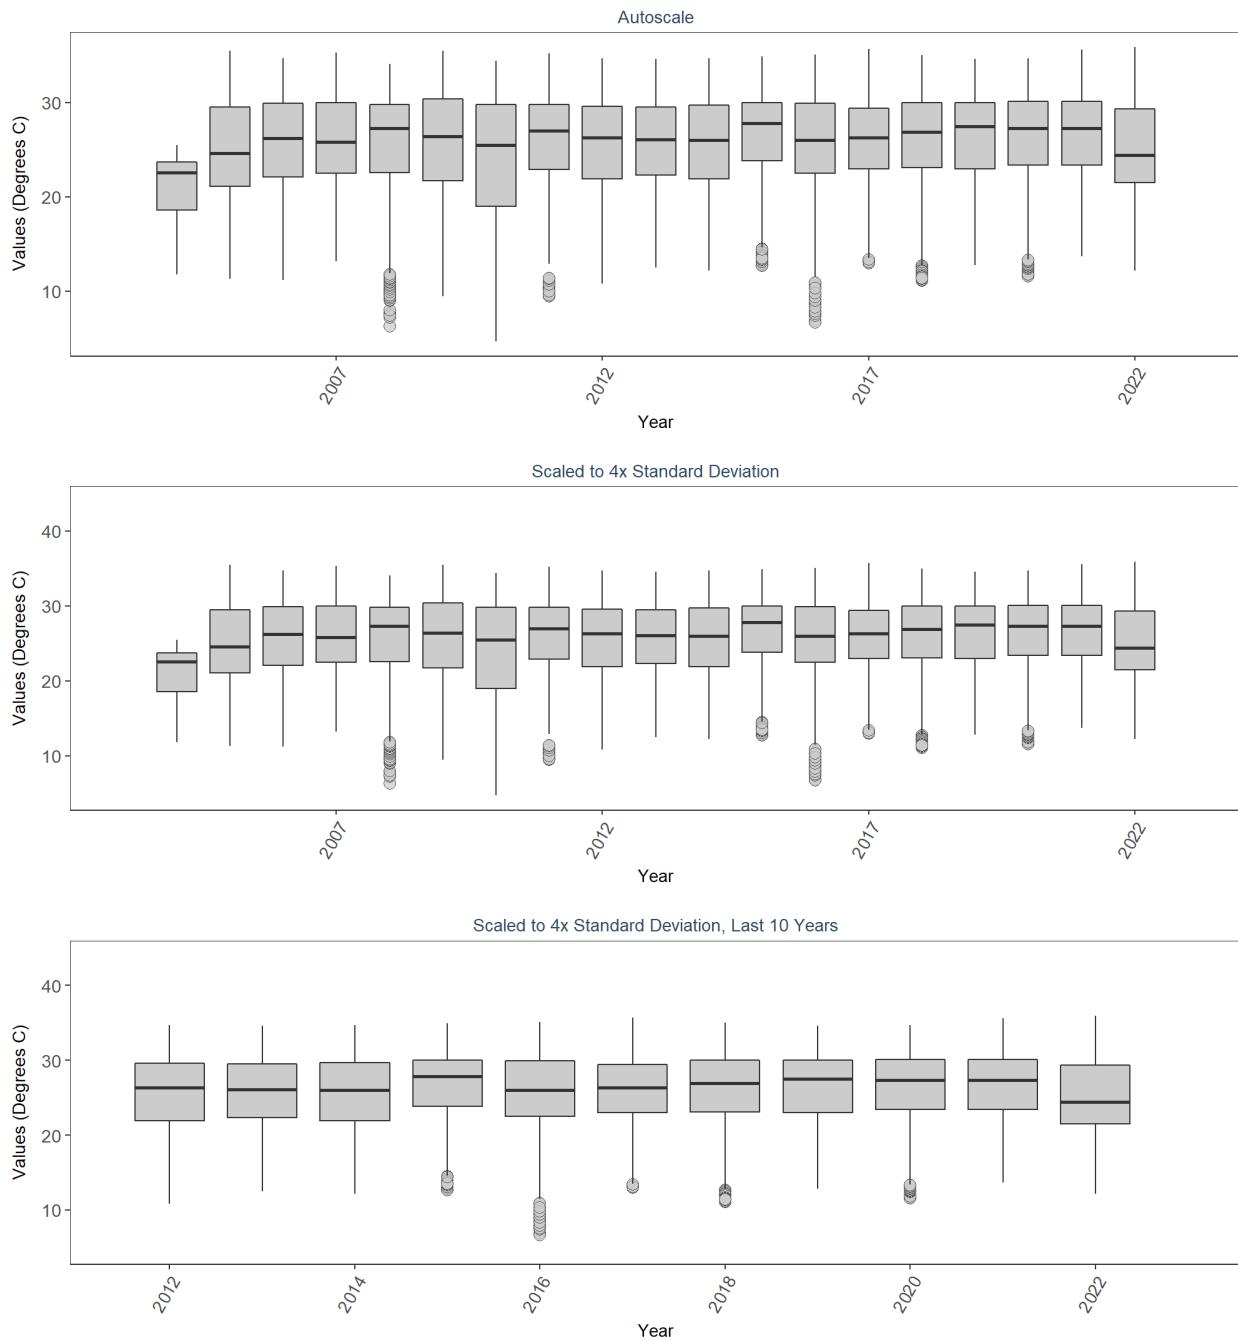


**Estero Bay Aquatic Preserve**  
**474**  
**Estero Bay Aquatic Preserve Continuous Water Quality Monitoring**  
**EB03**  
**By Year & Month**

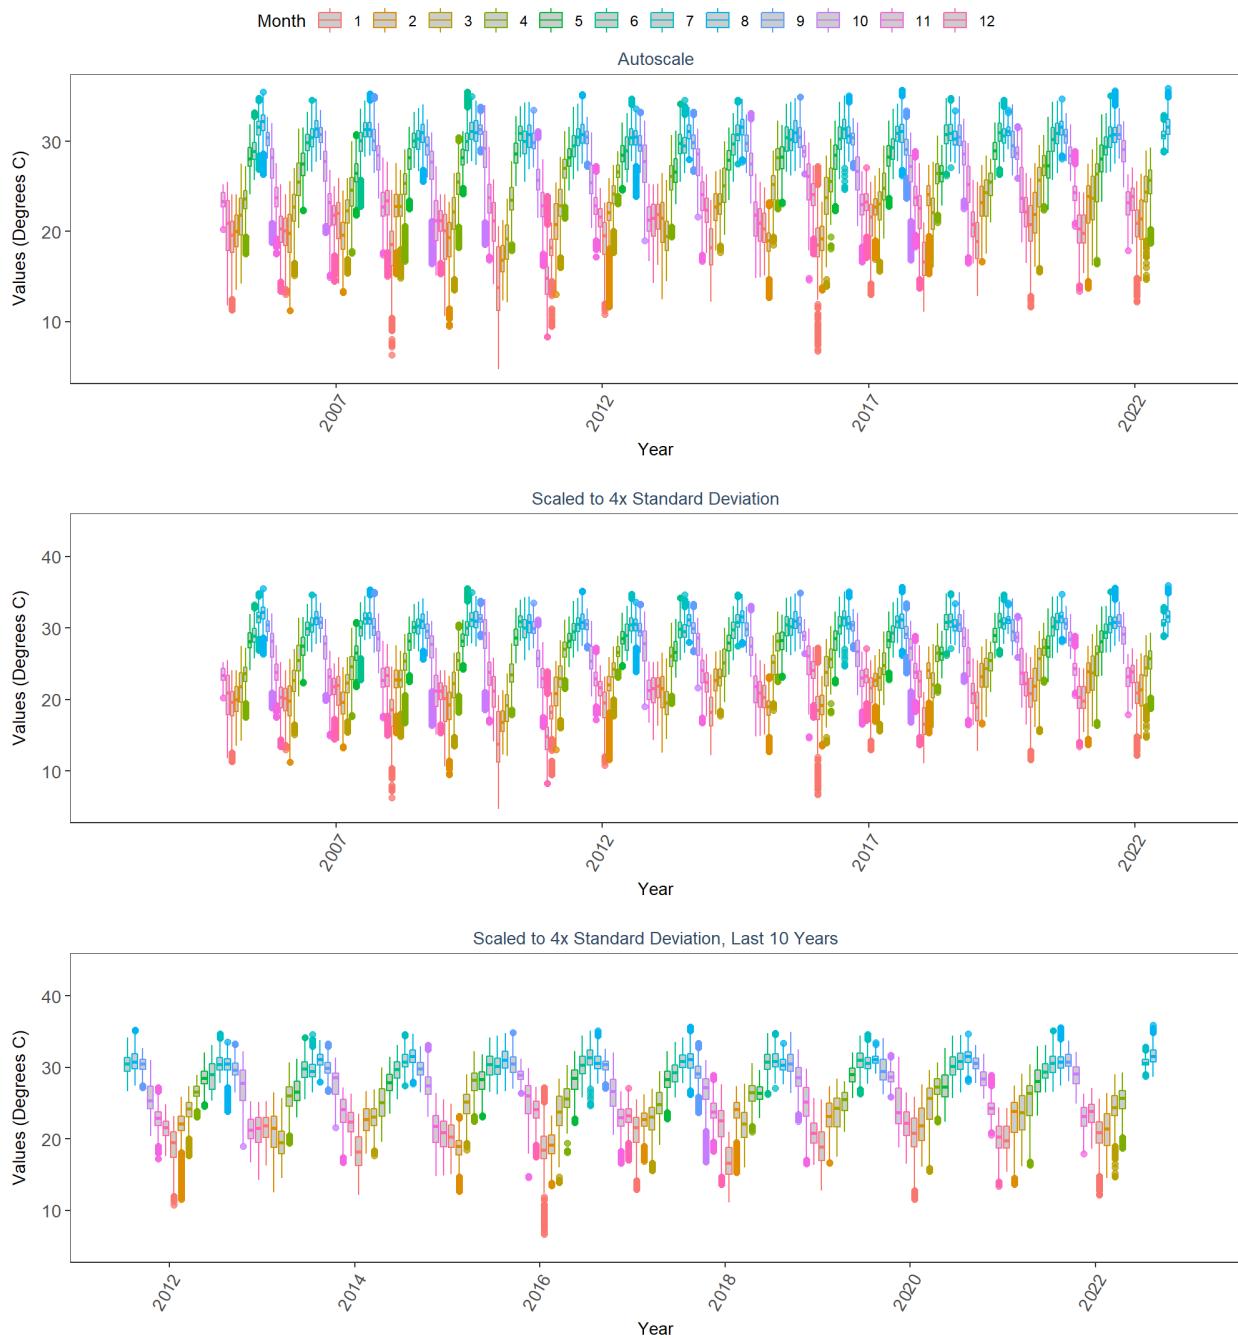


Estero Bay Aquatic Preserve  
 474  
 Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
 EB03  
 By Month

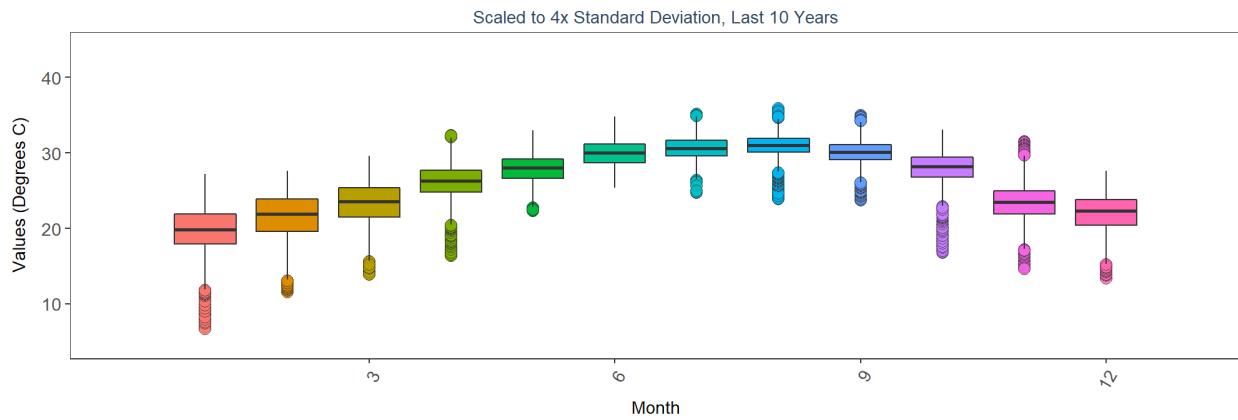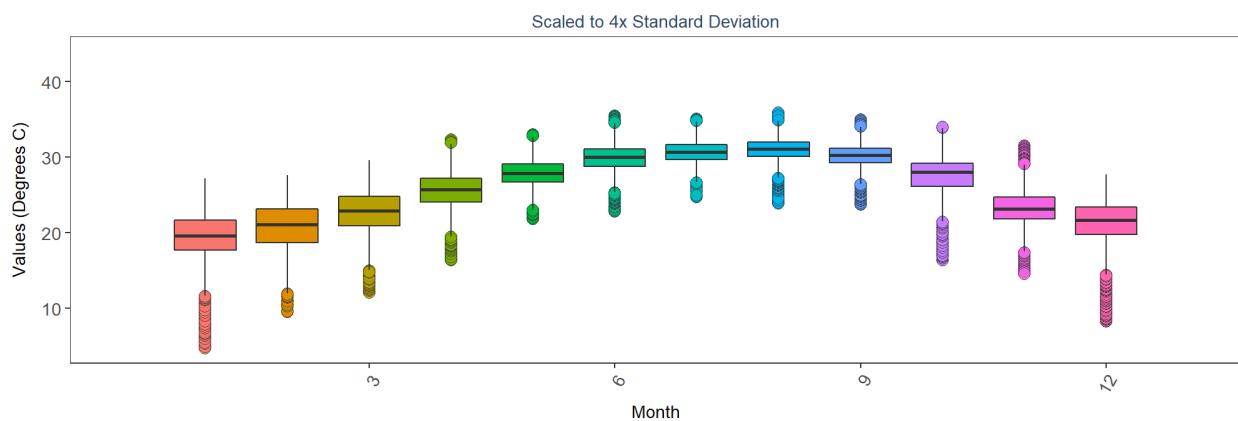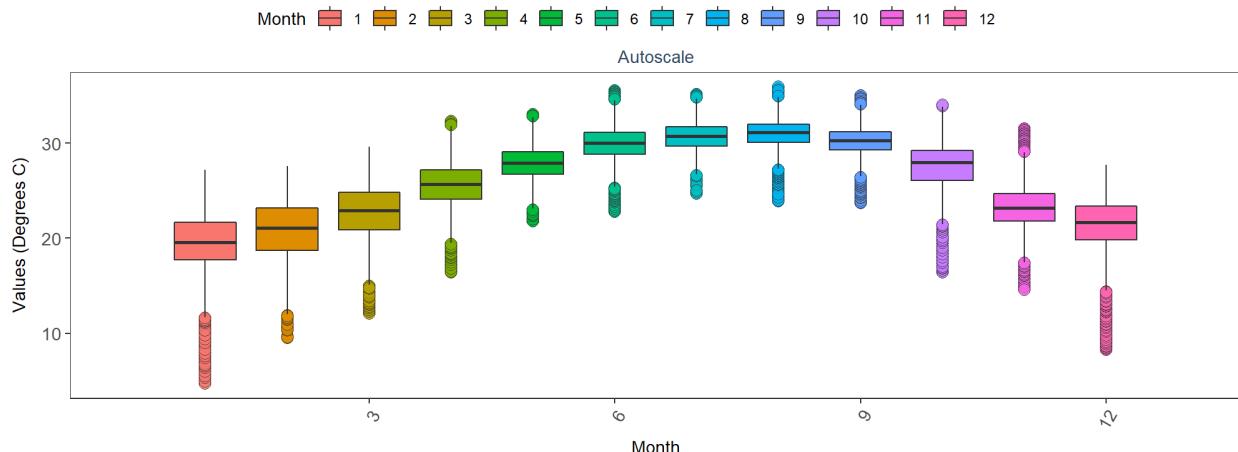


Matlacha Pass Aquatic Preserve  
512  
Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
MP1A  
By Year

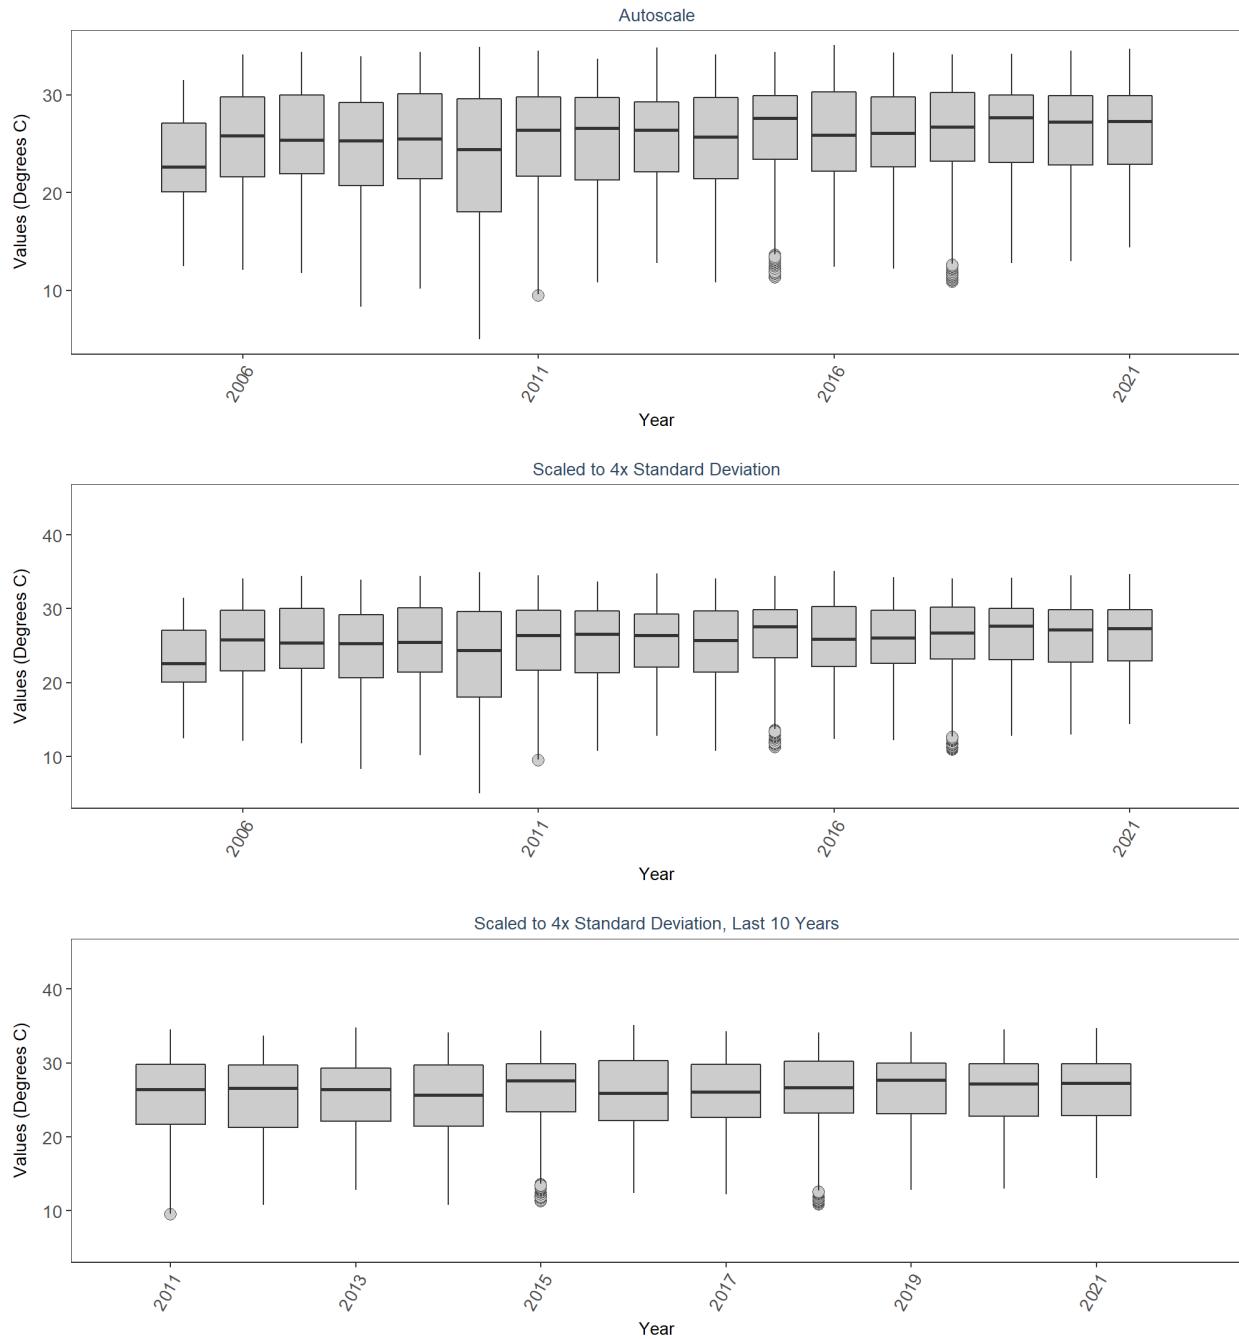


Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP1A  
 By Year & Month

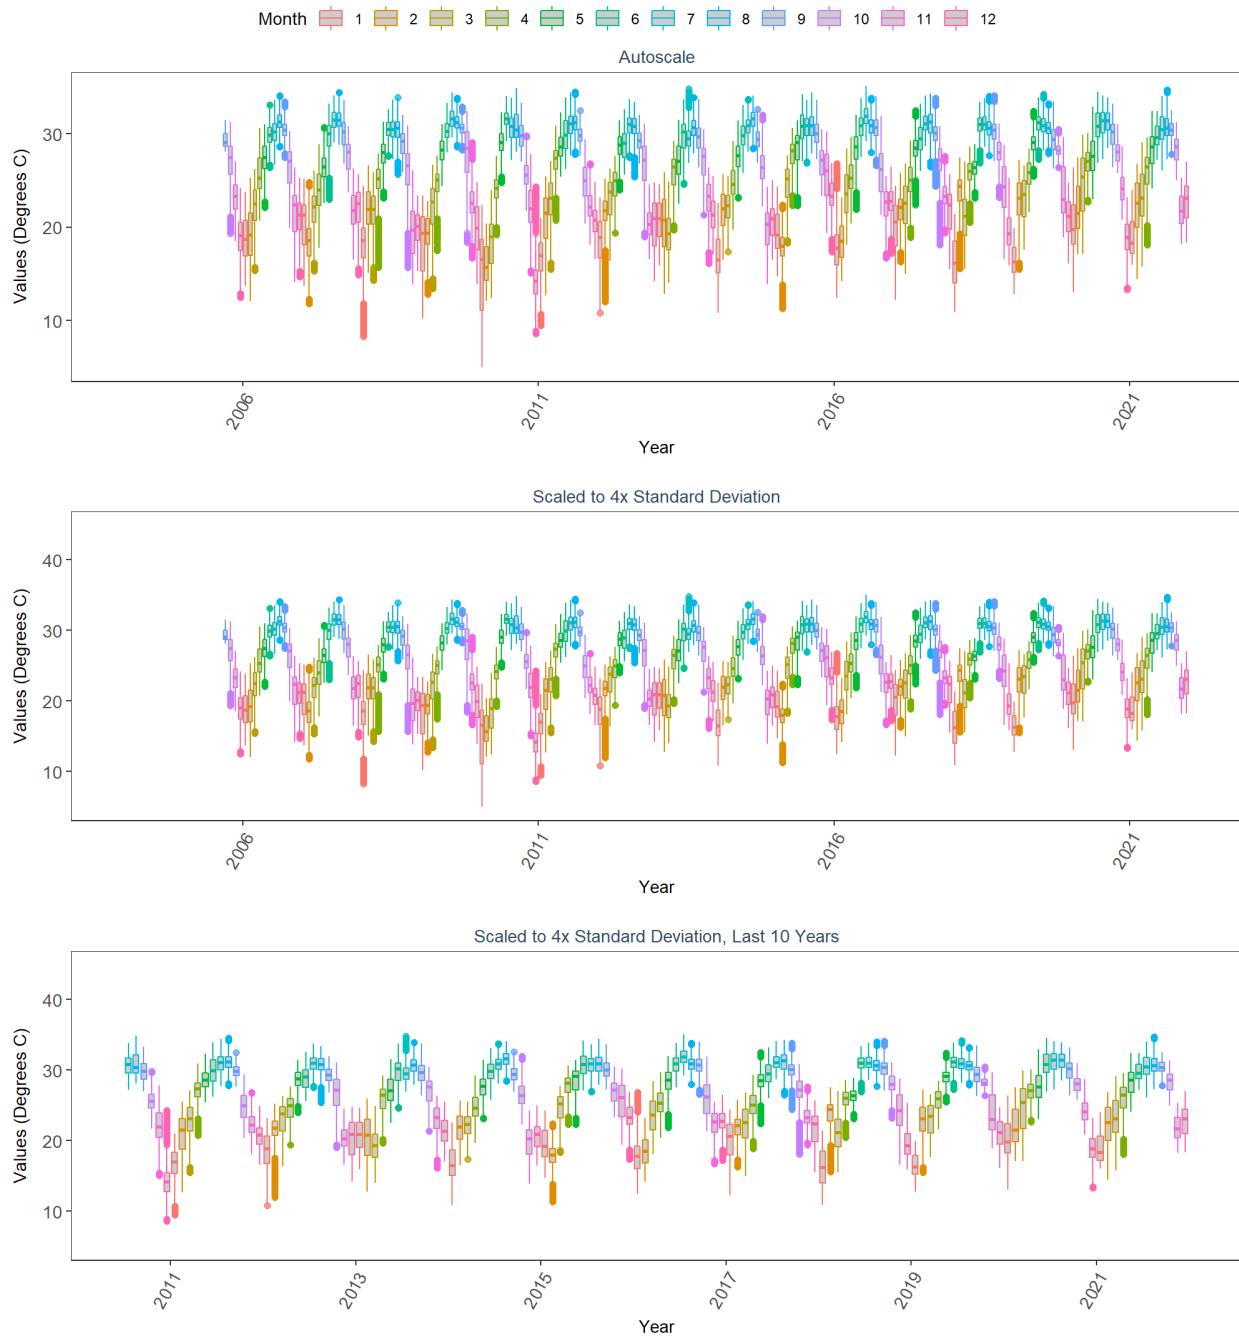


Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP1A  
 By Month

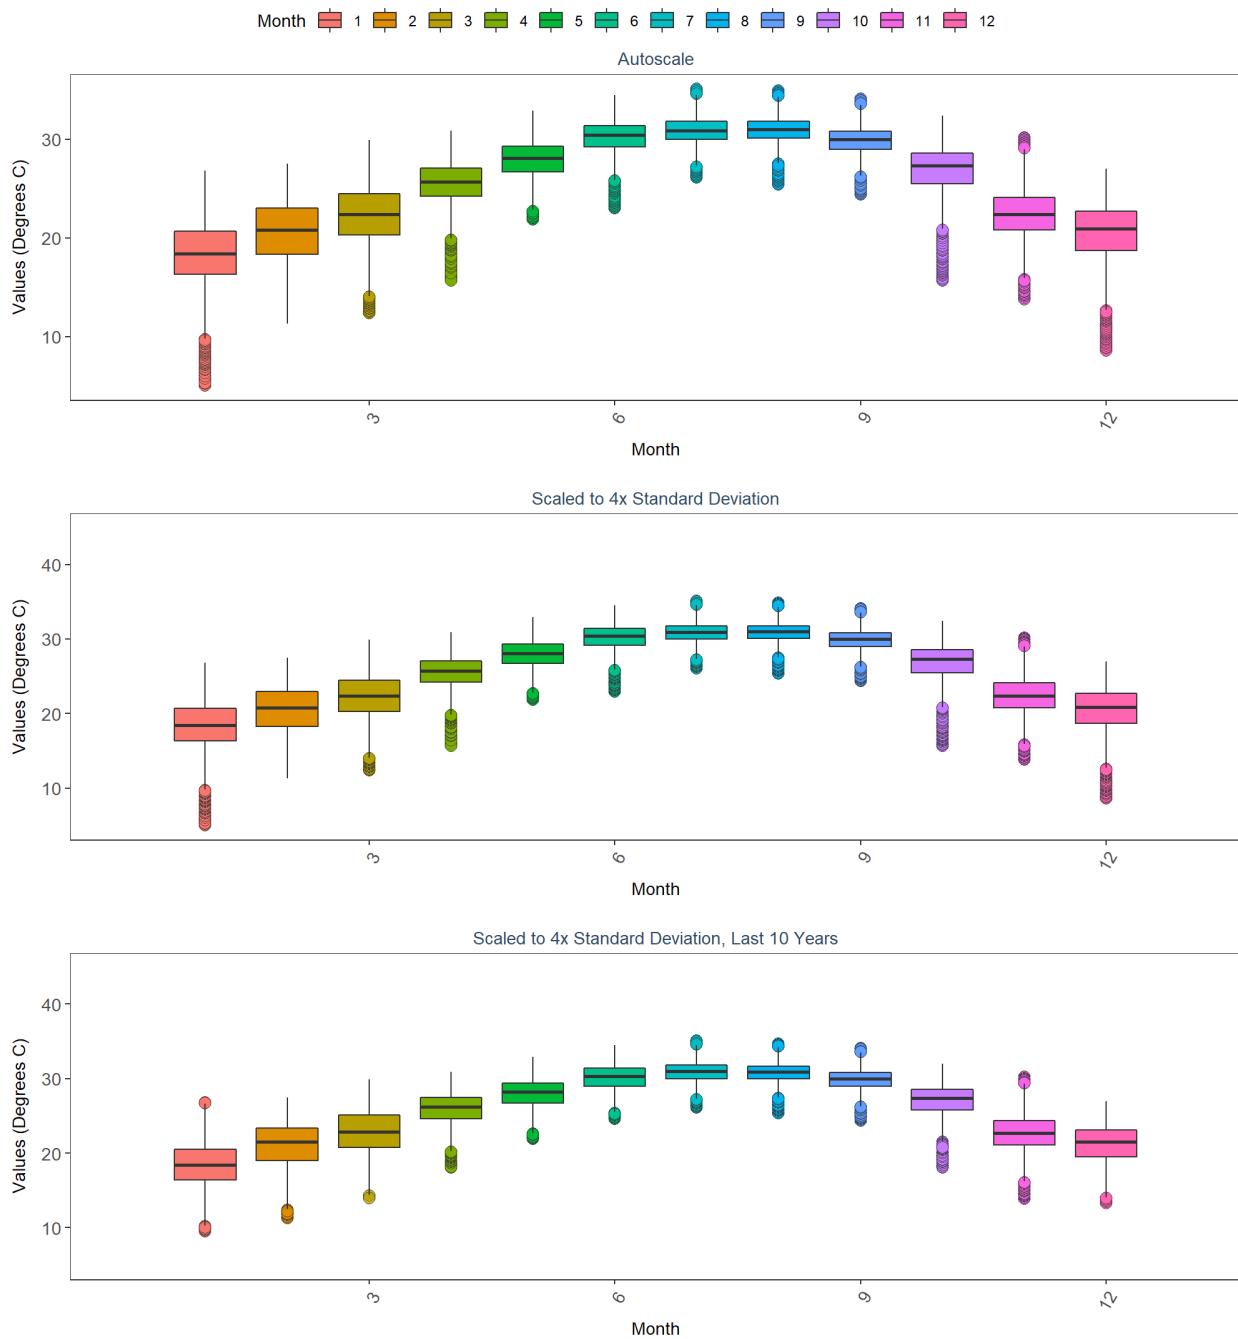


Matlacha Pass Aquatic Preserve  
512  
Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
MP2B  
By Year

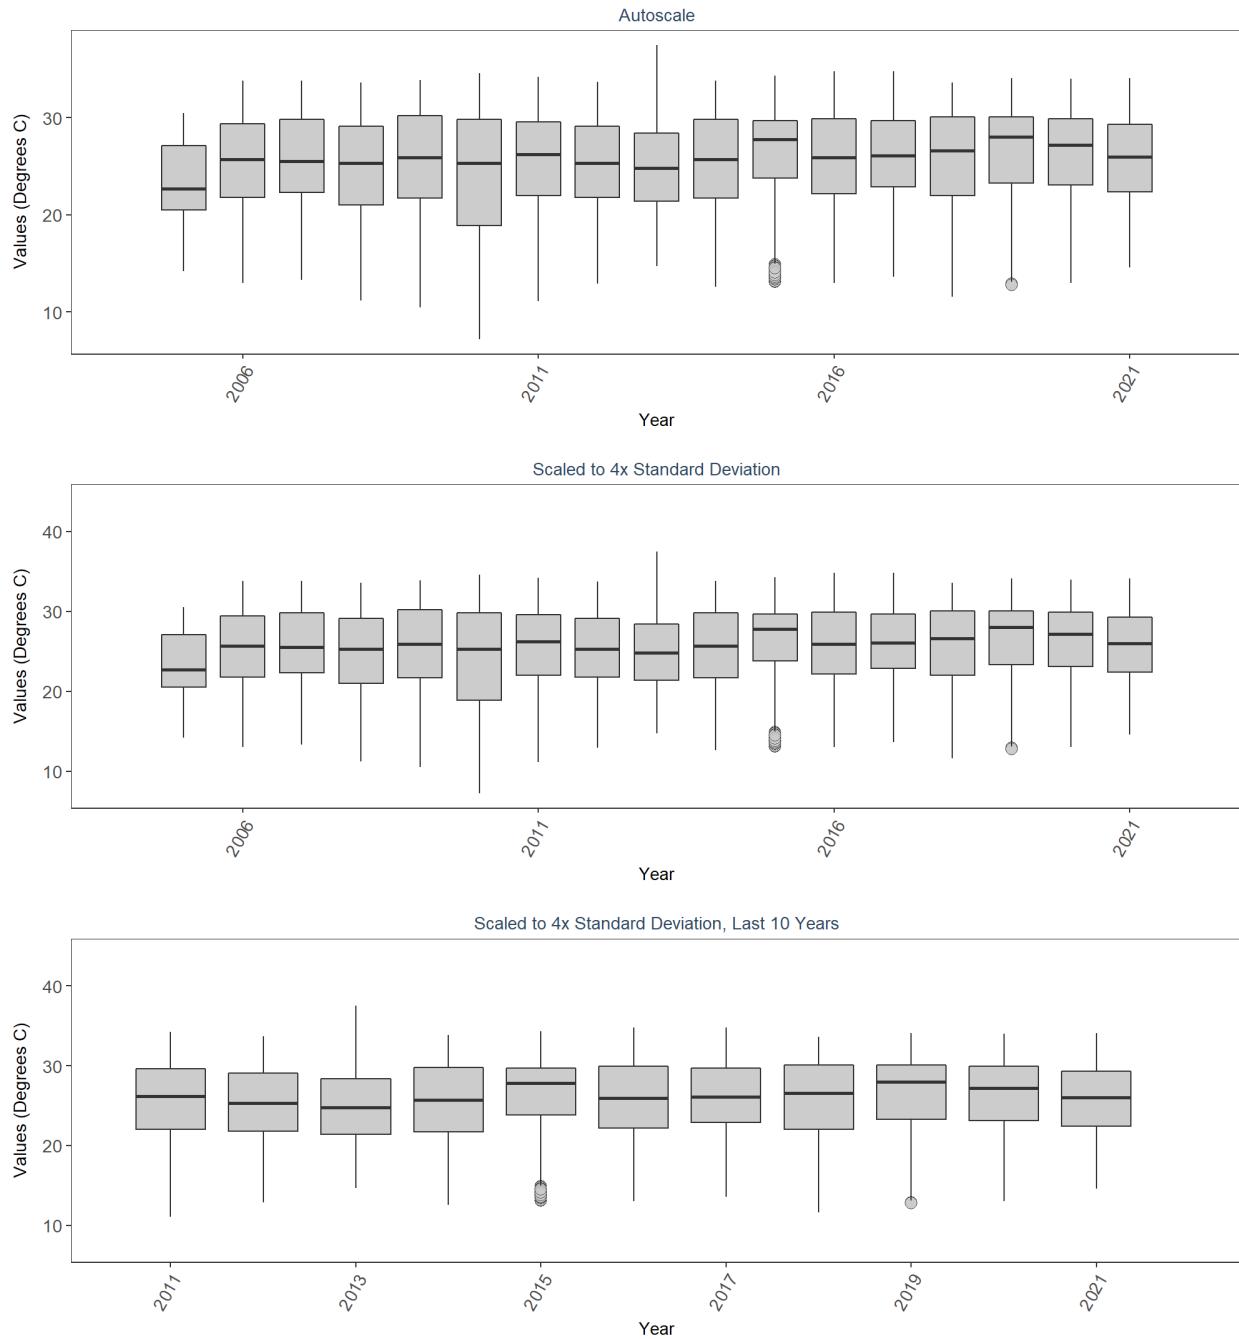


Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP2B  
 By Year & Month

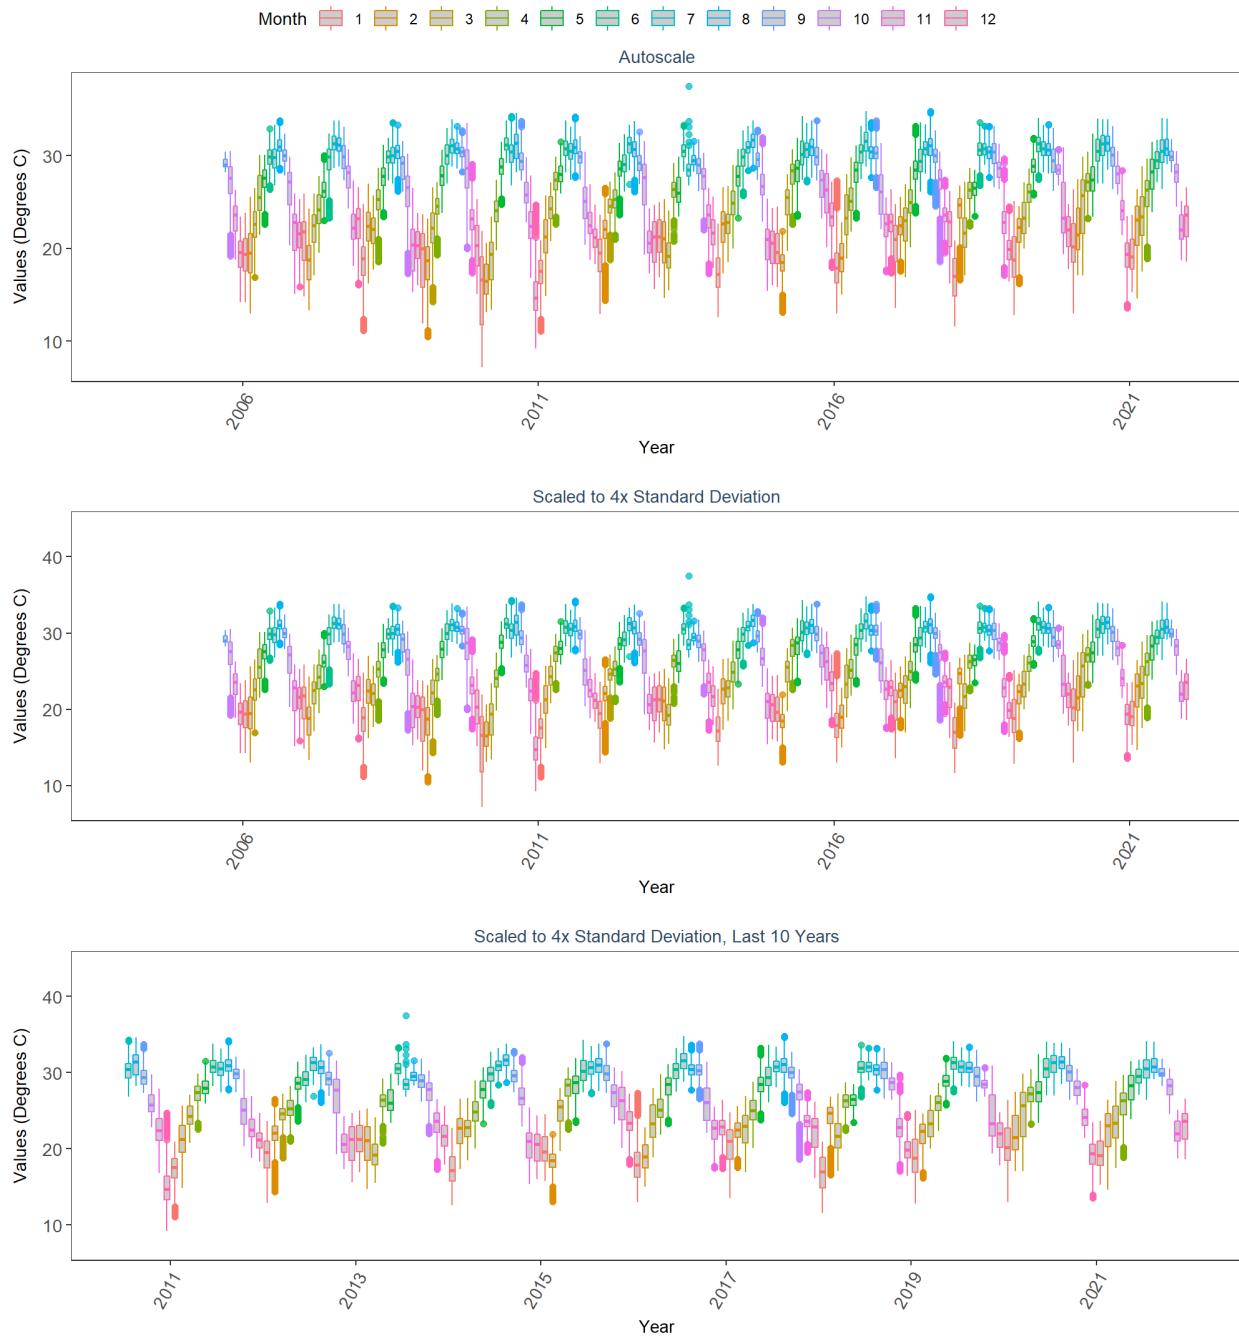


Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP2B  
 By Month

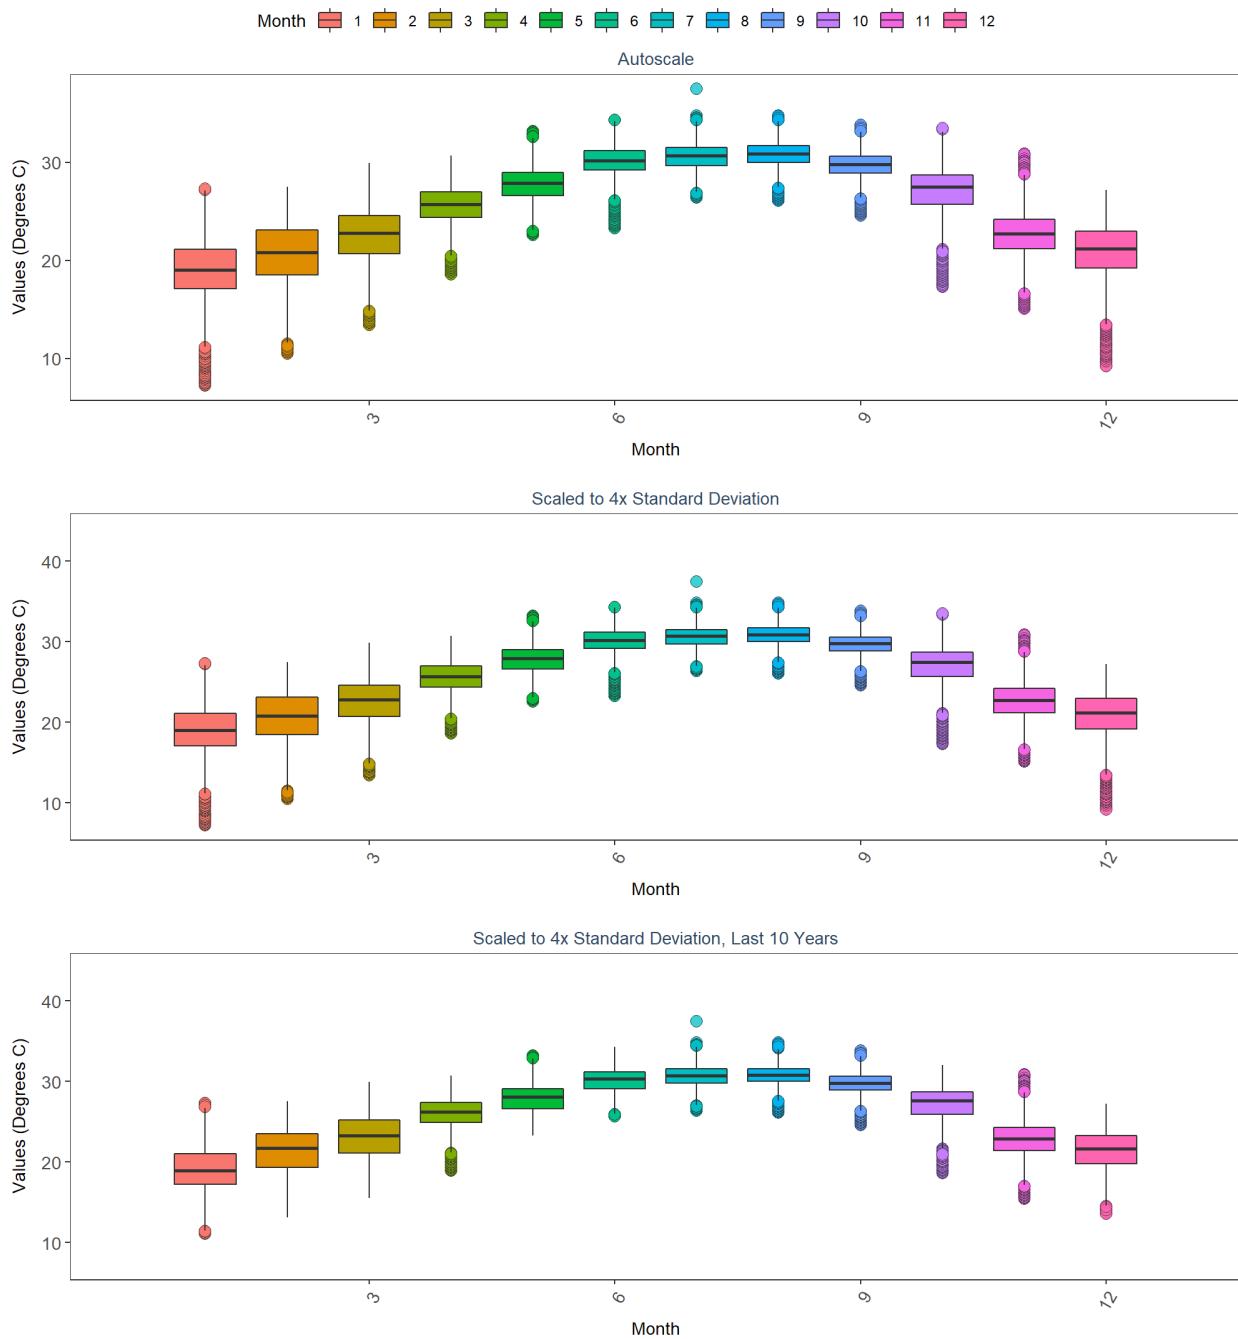




Matlacha Pass Aquatic Preserve  
512  
Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
MP3C  
By Year

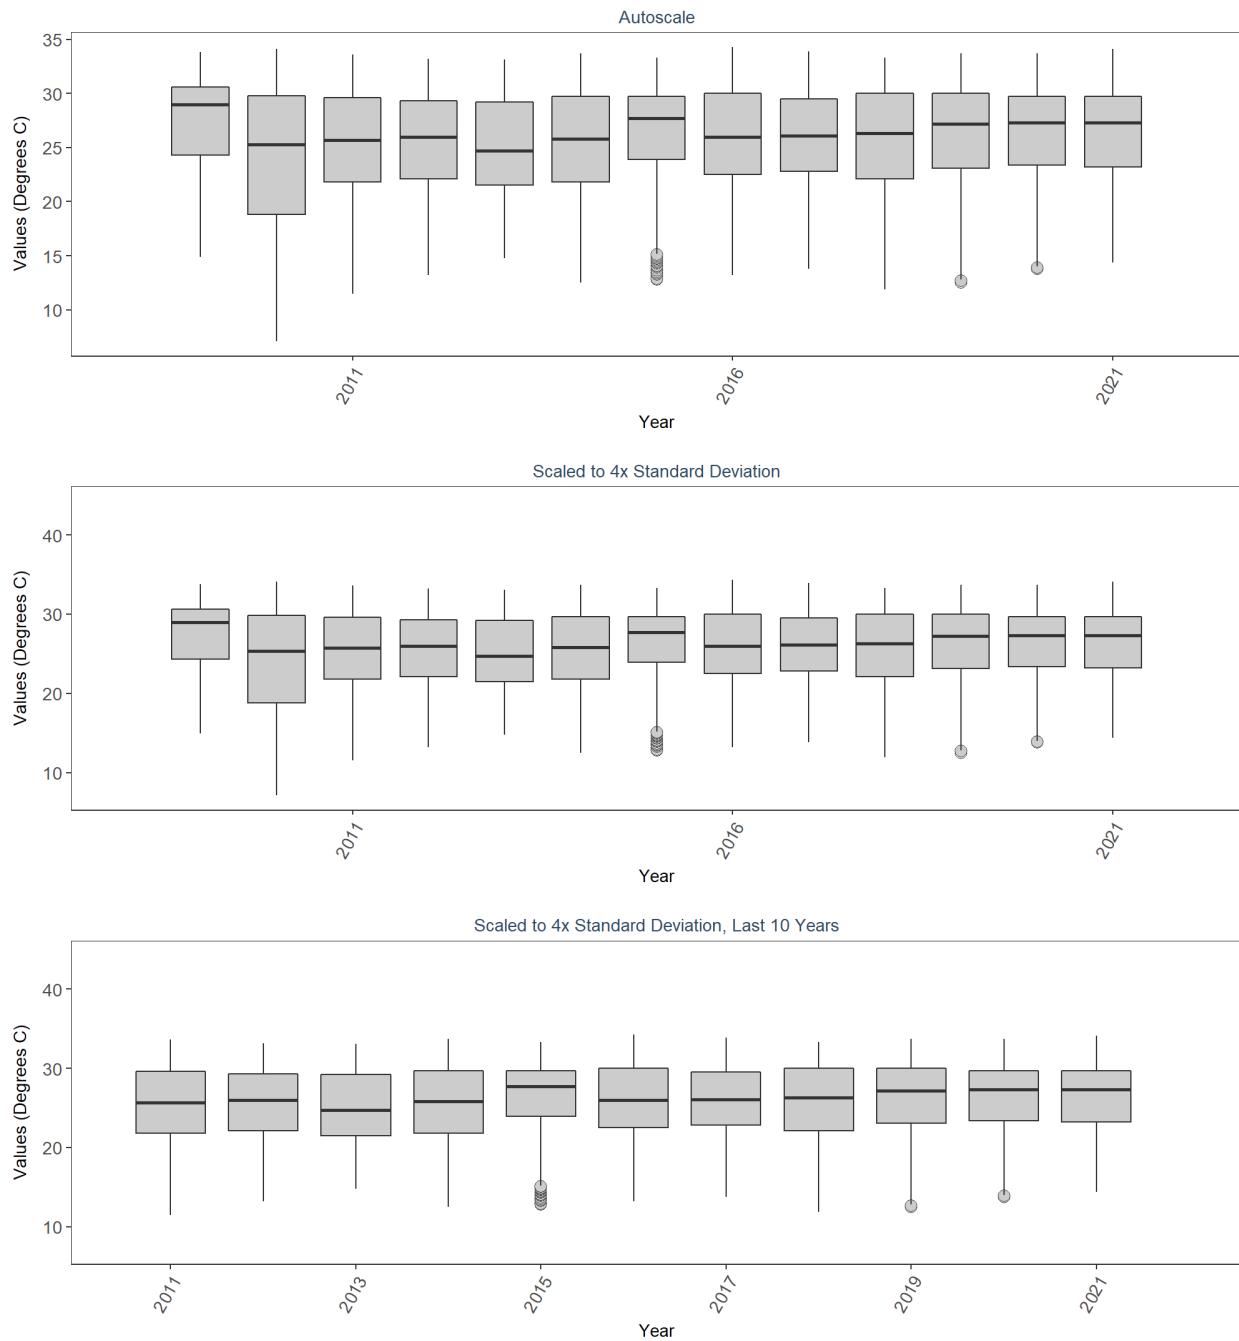


Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP3C  
 By Year & Month

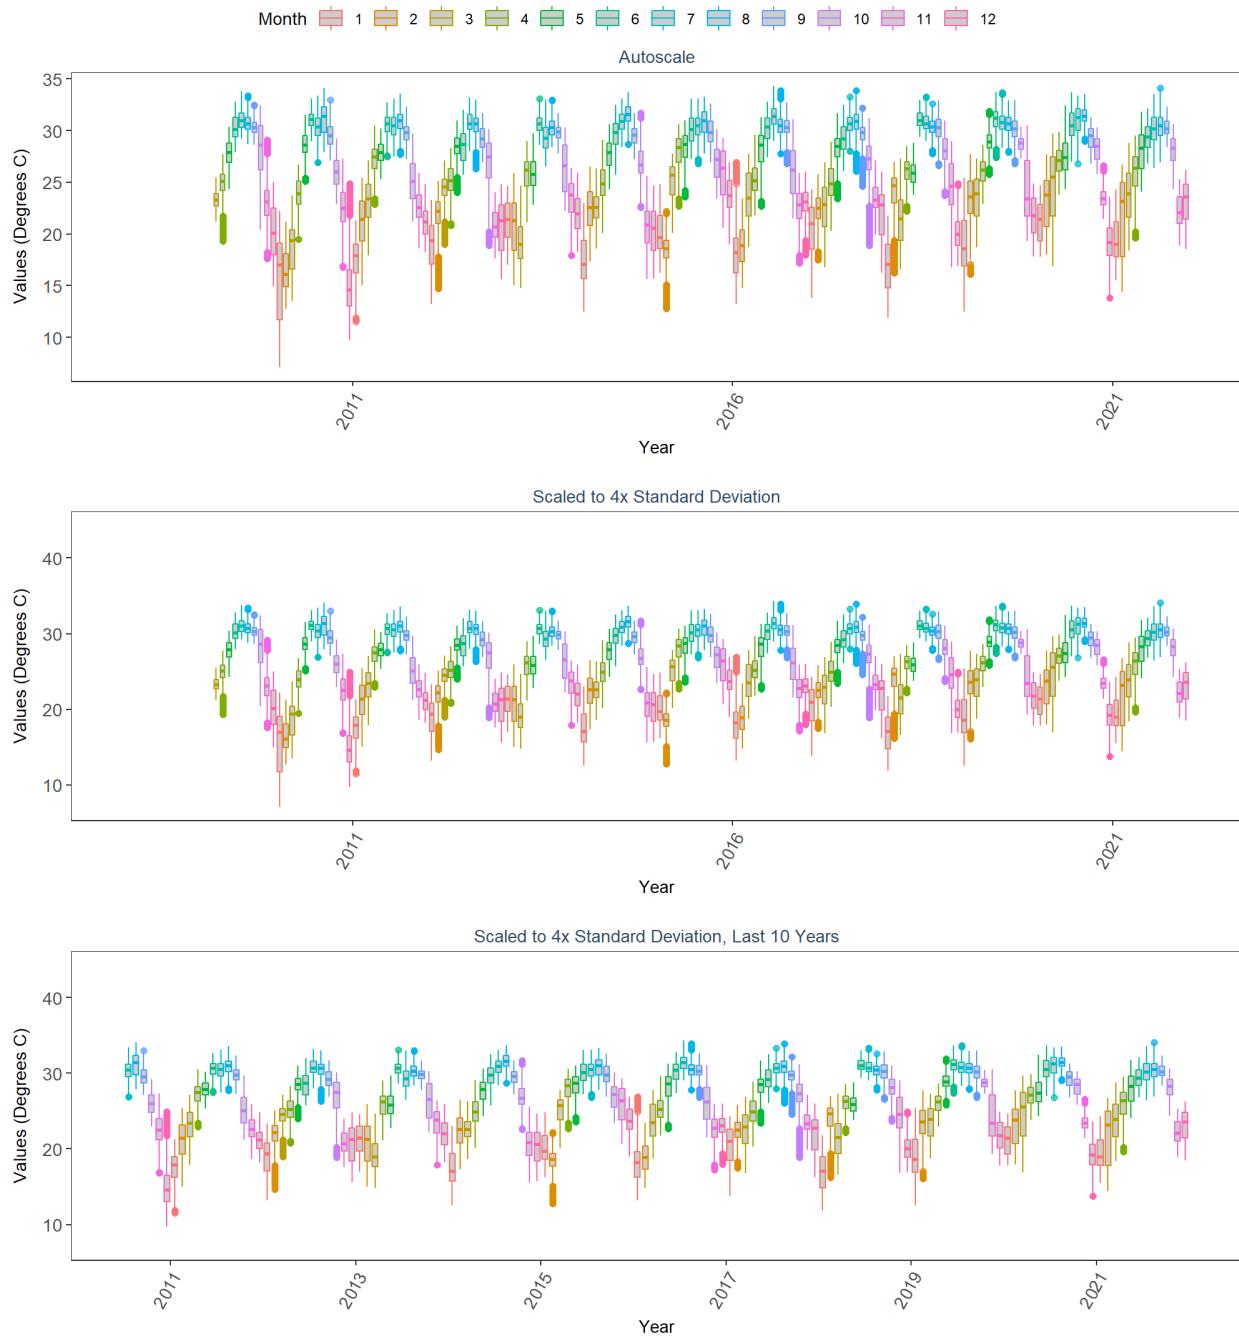


Matlacha Pass Aquatic Preserve  
 512  
 Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
 MP3C  
 By Month

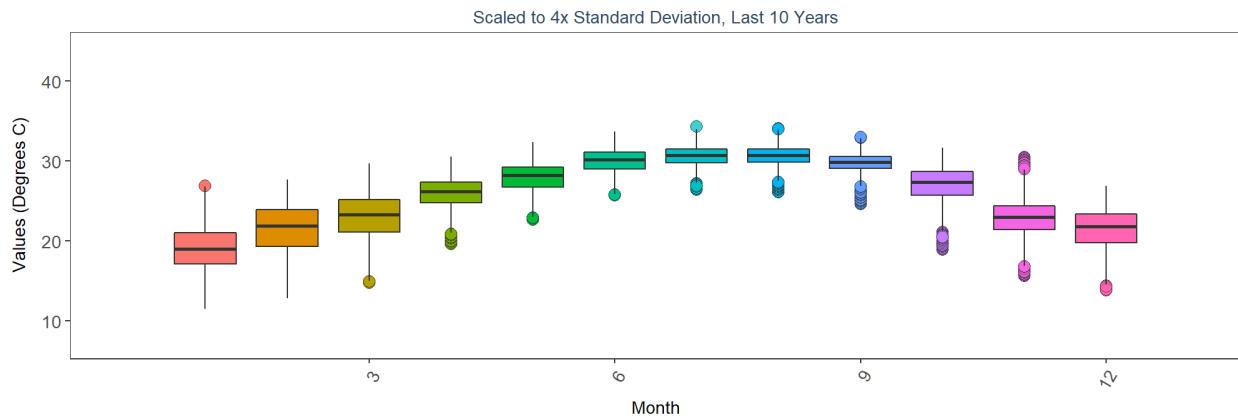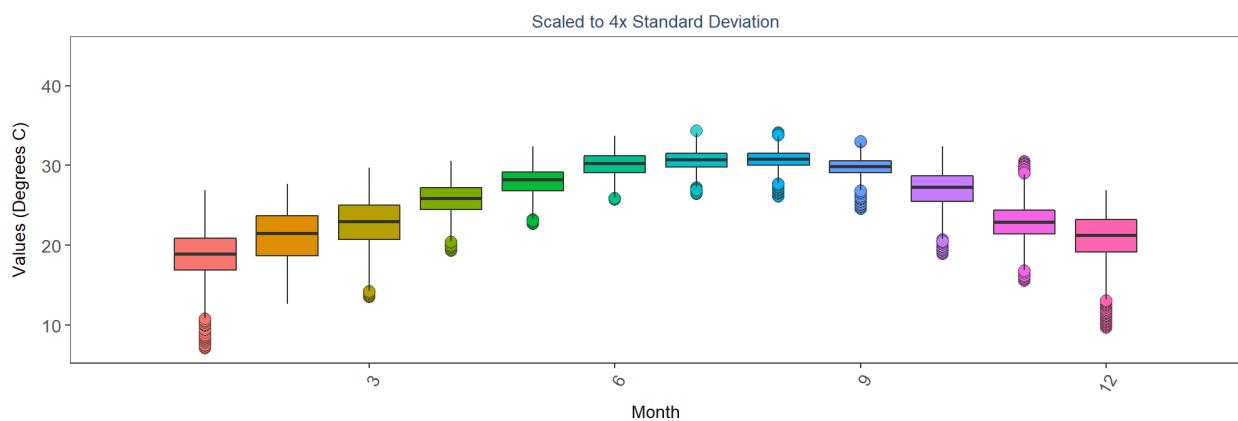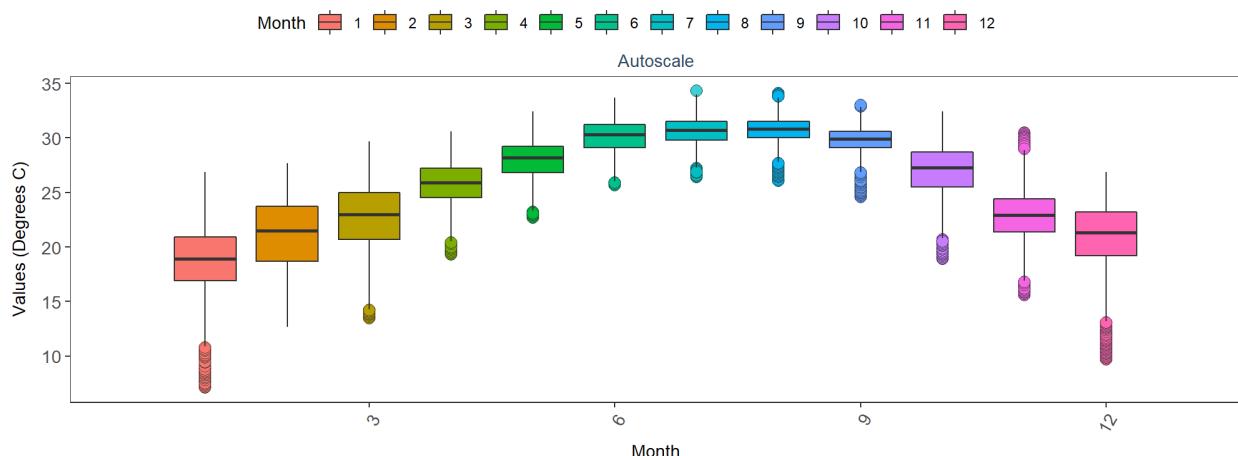


Pinellas County Aquatic Preserve  
5  
National Data Buoy Center  
CWBF1  
By Year

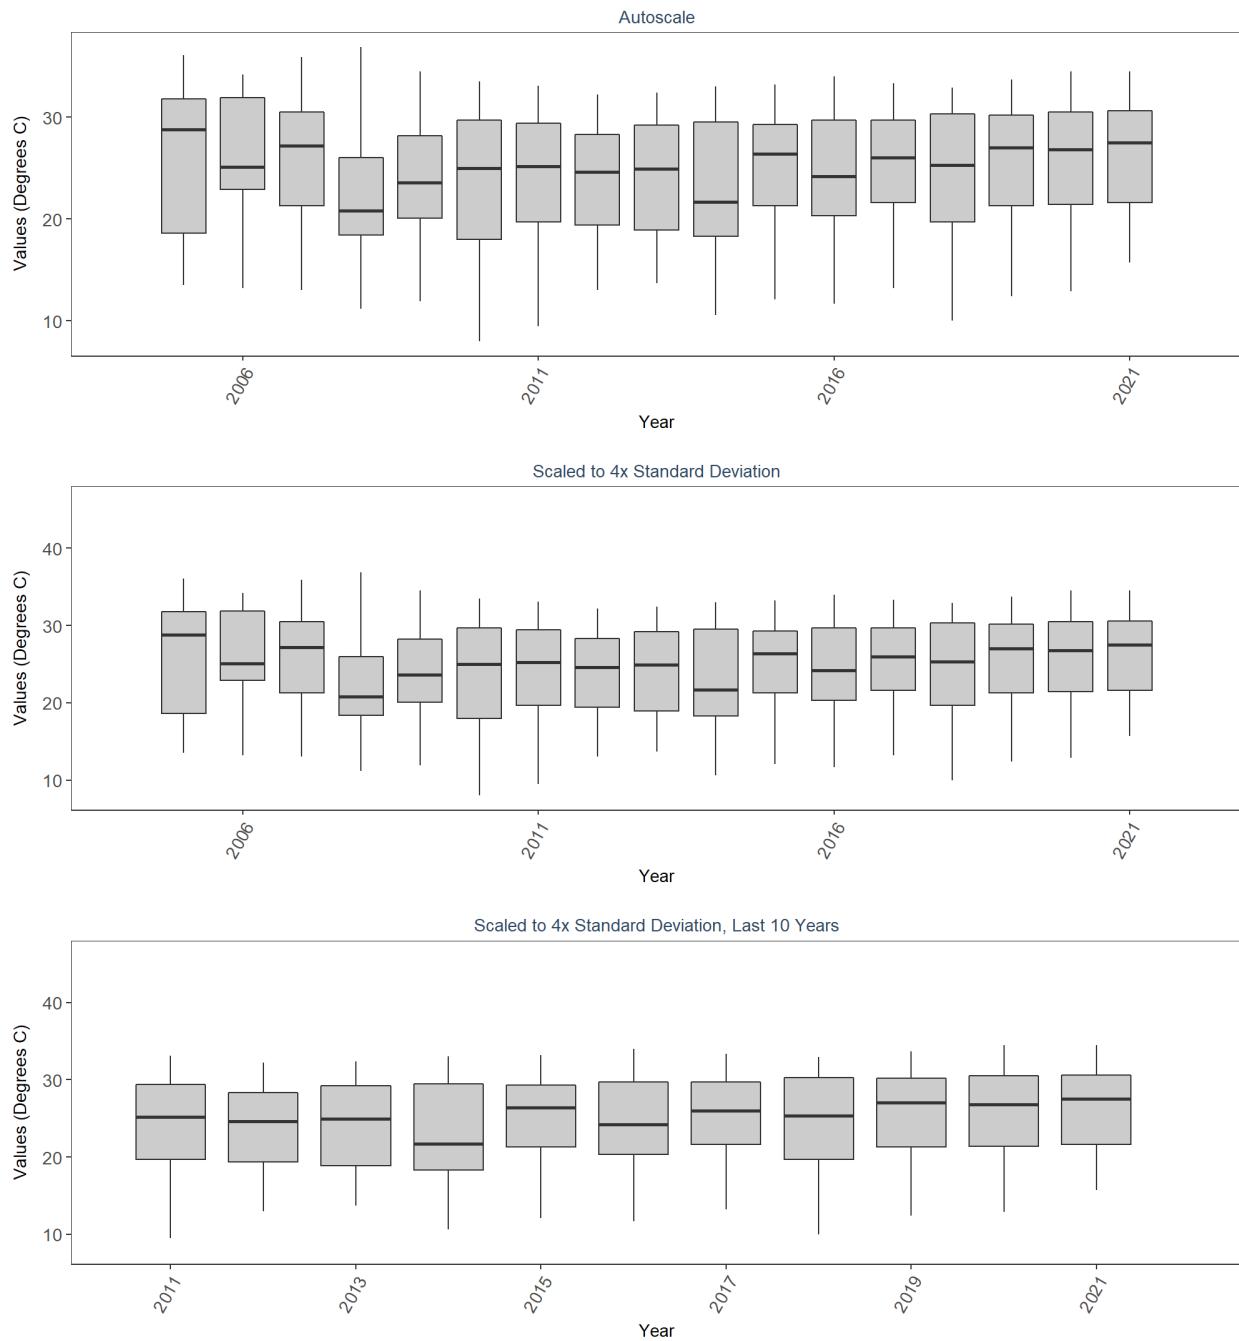


Pinellas County Aquatic Preserve  
5  
National Data Buoy Center  
CWBFI  
By Year & Month

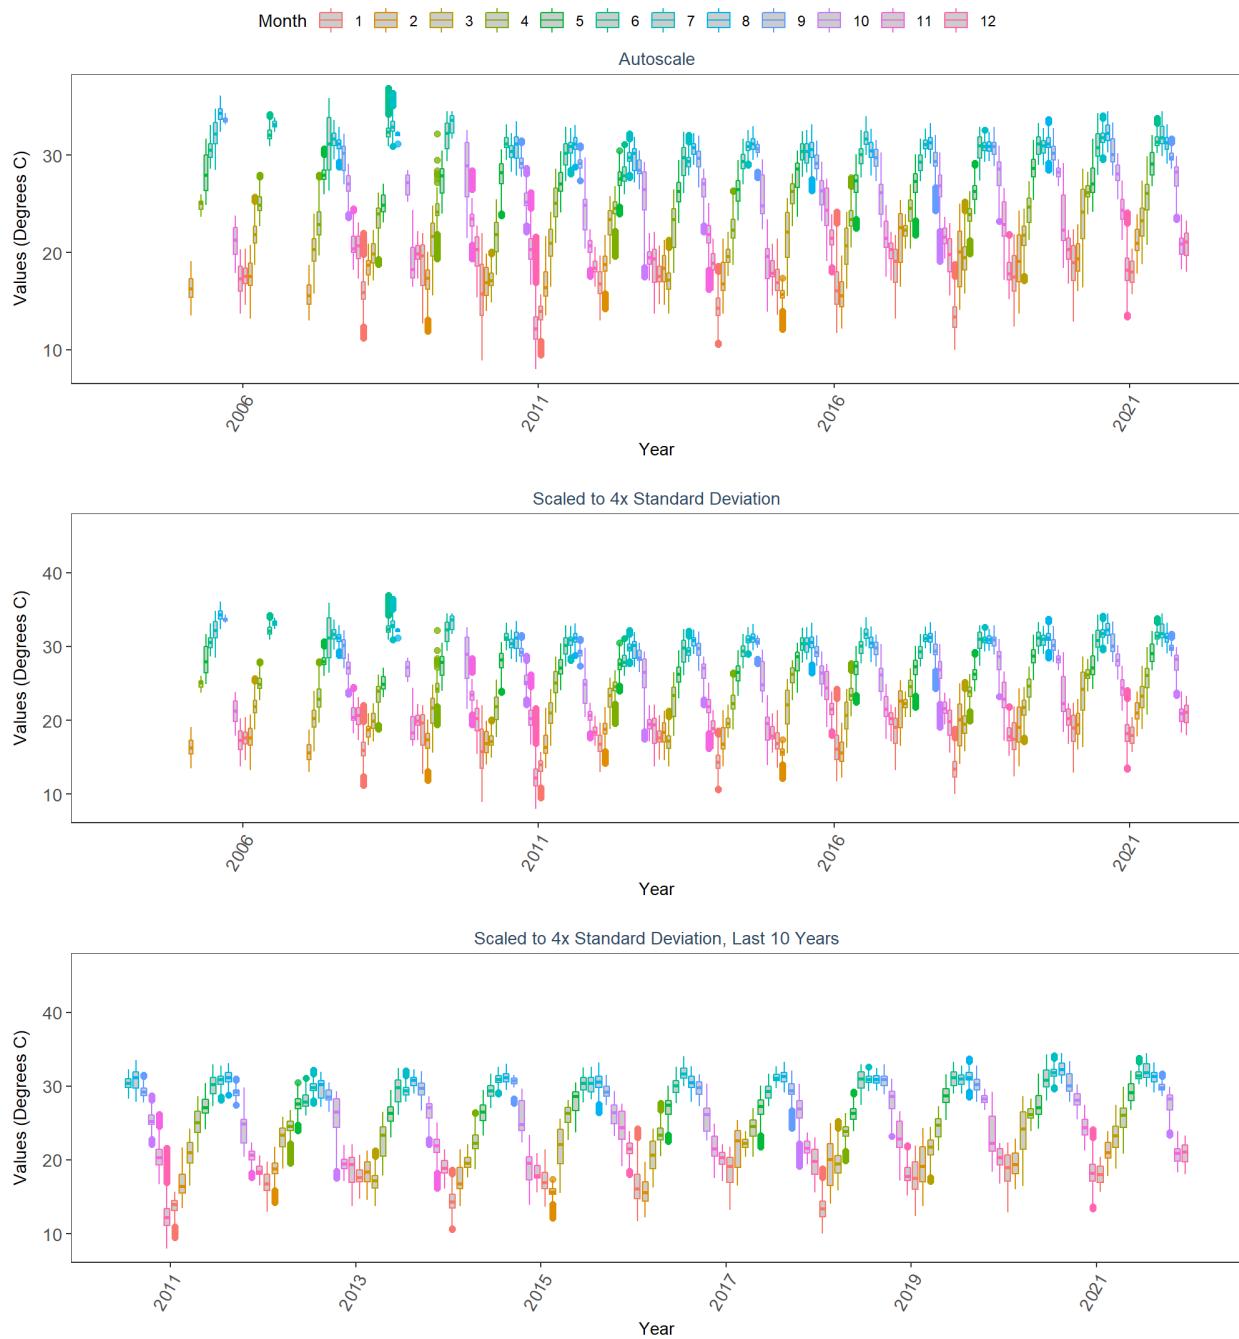


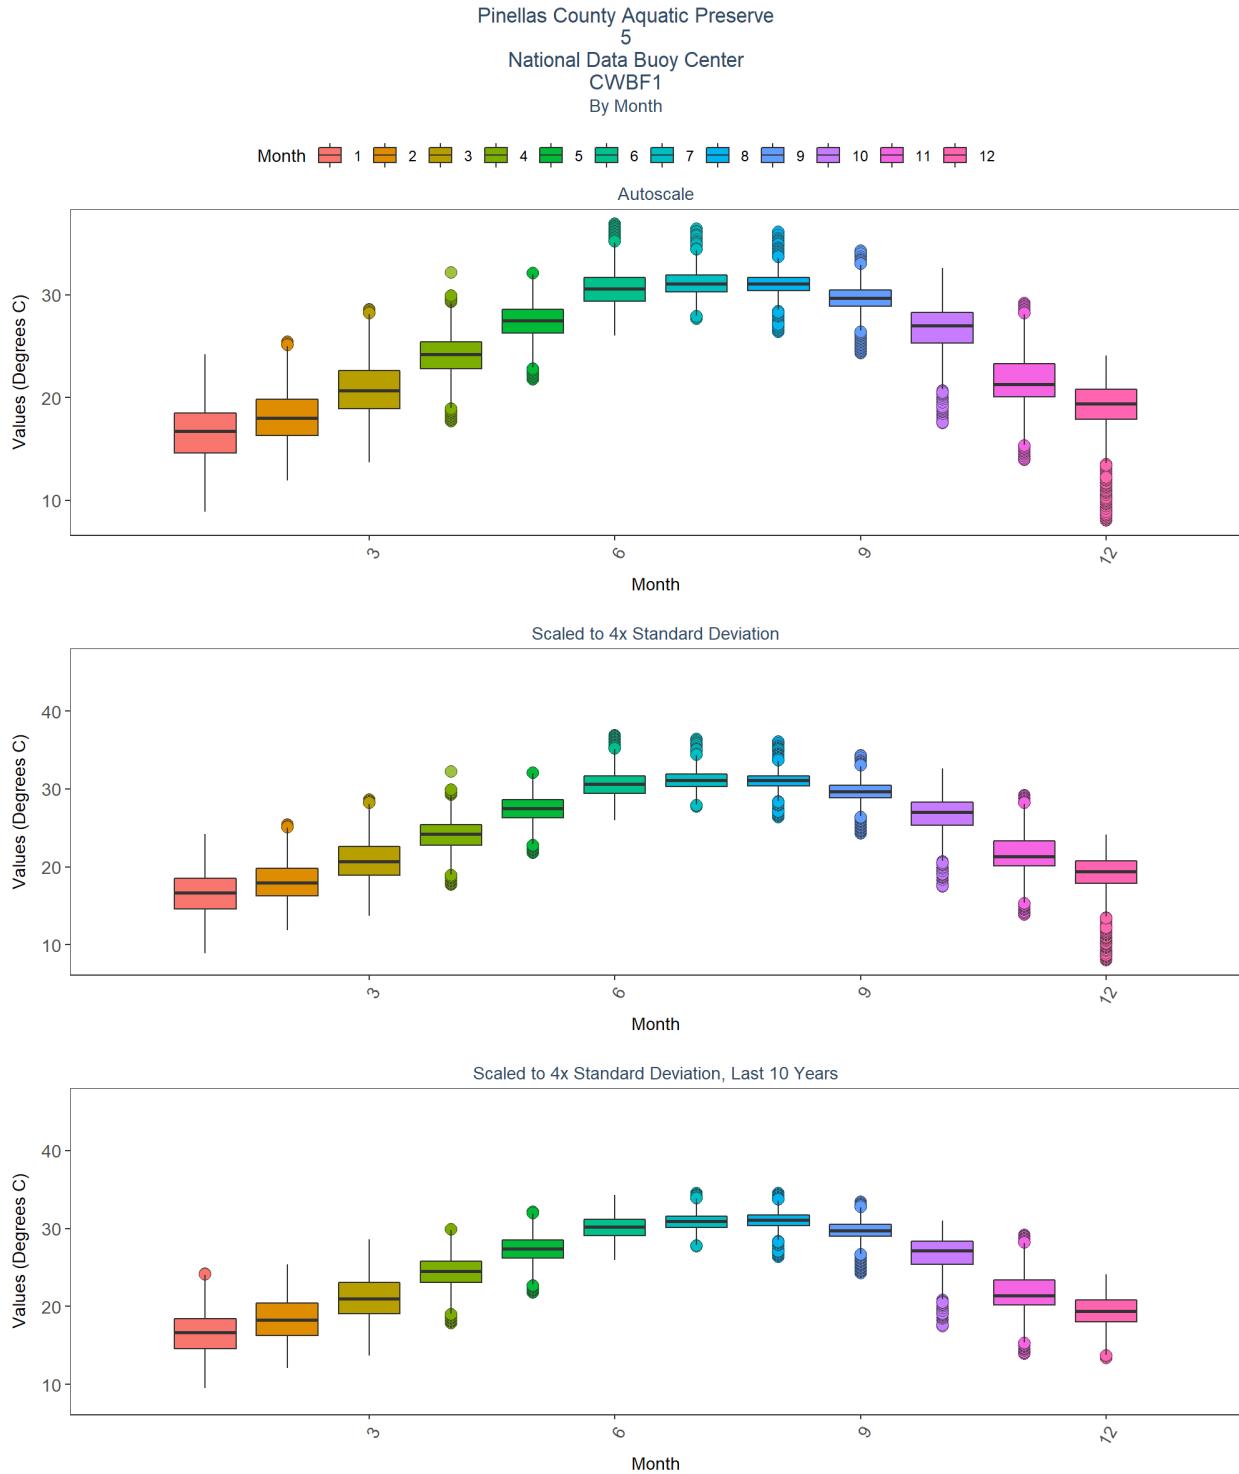


Rookery Bay Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbhwq  
 By Year

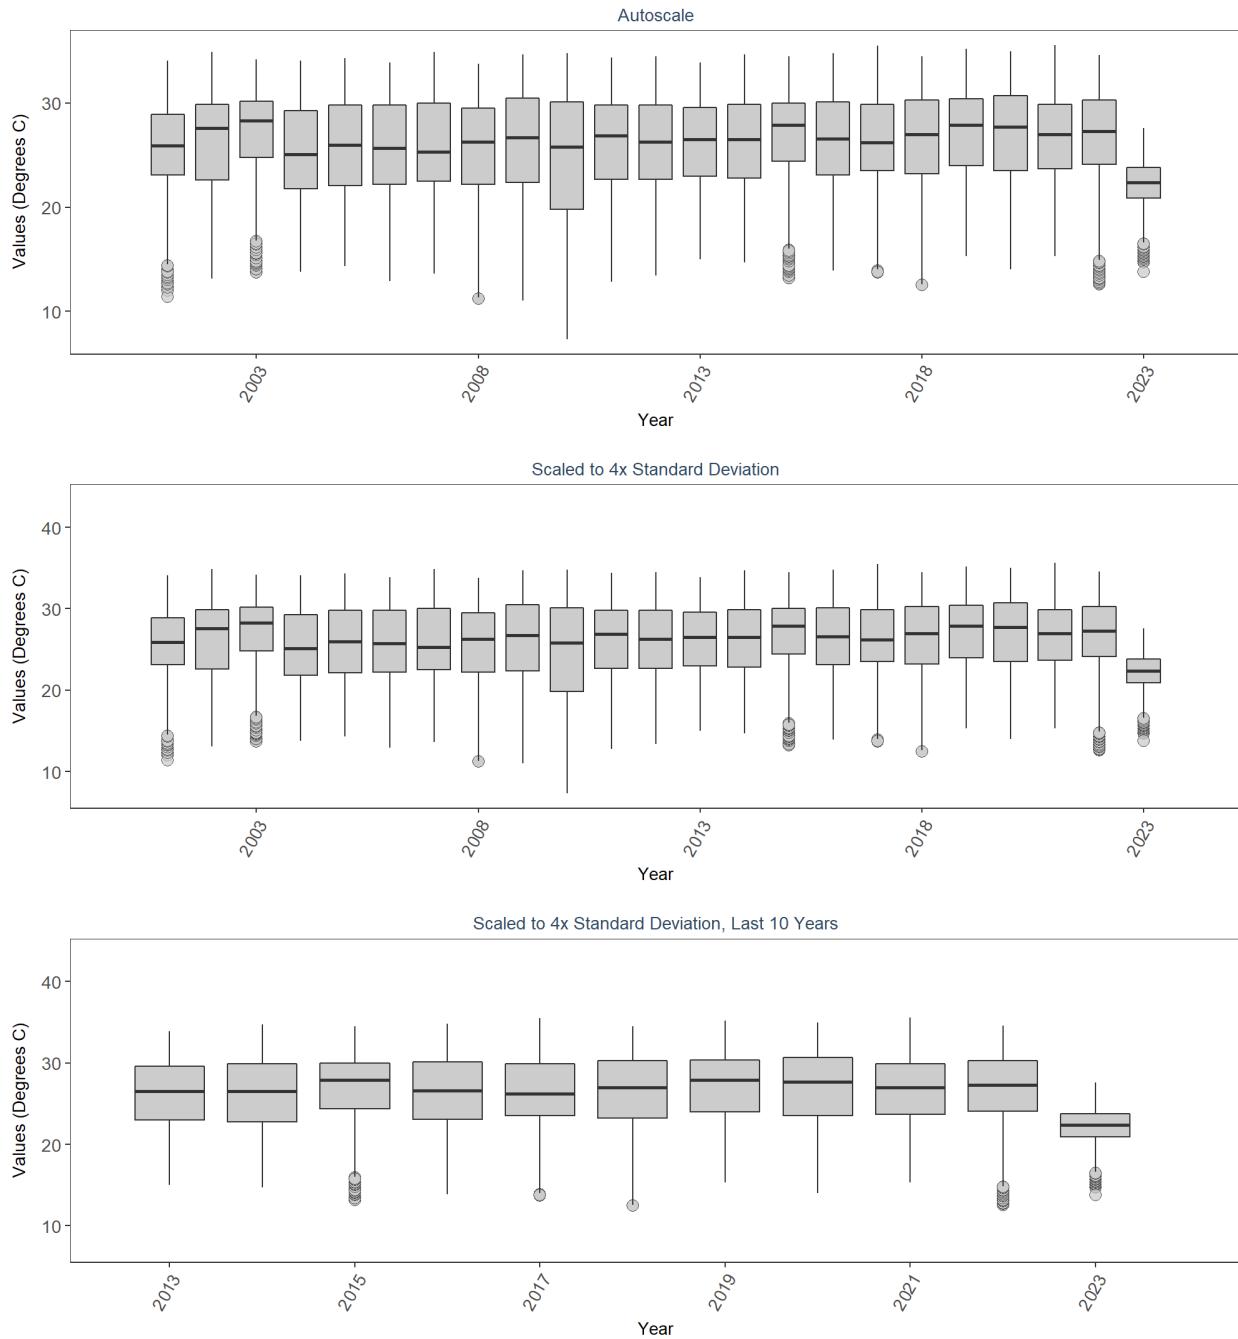


**Rookery Bay Aquatic Preserve**  
**354**  
**Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program**  
**rkbhwq**  
**By Year & Month**

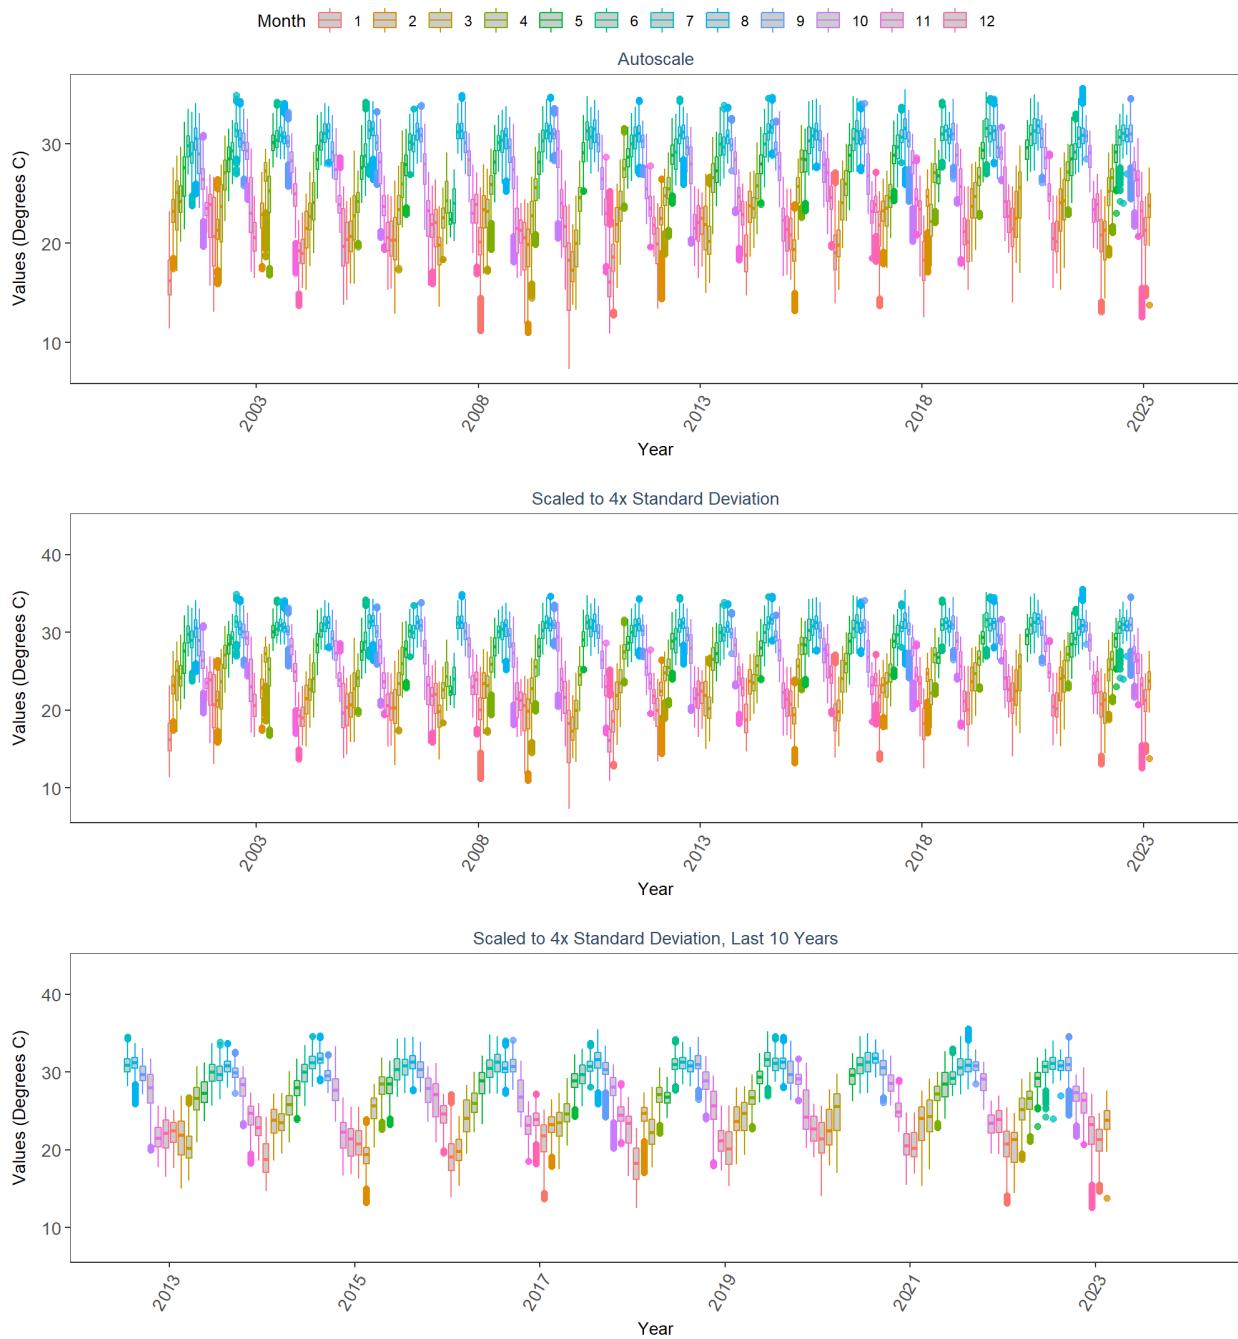

Rookery Bay Aquatic Preserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rklhwq  
 By Month

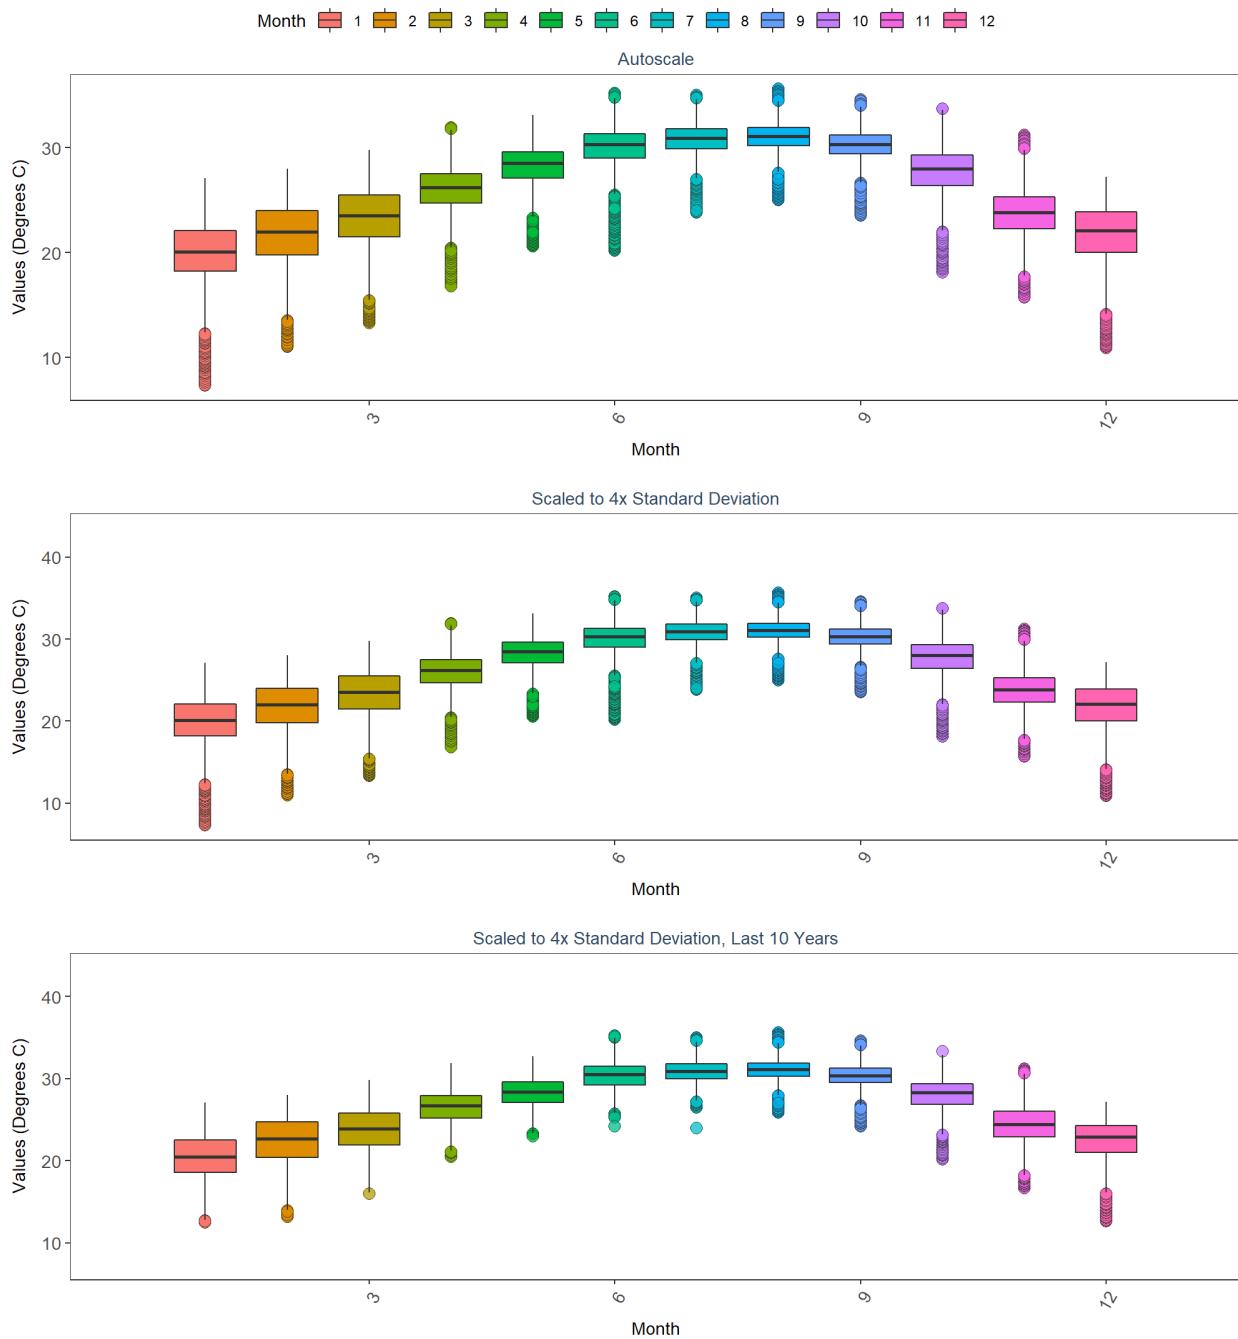

Rookery Bay National Estuarine Research Reserve  
7  
National Water Information System  
255123081321300  
By Year

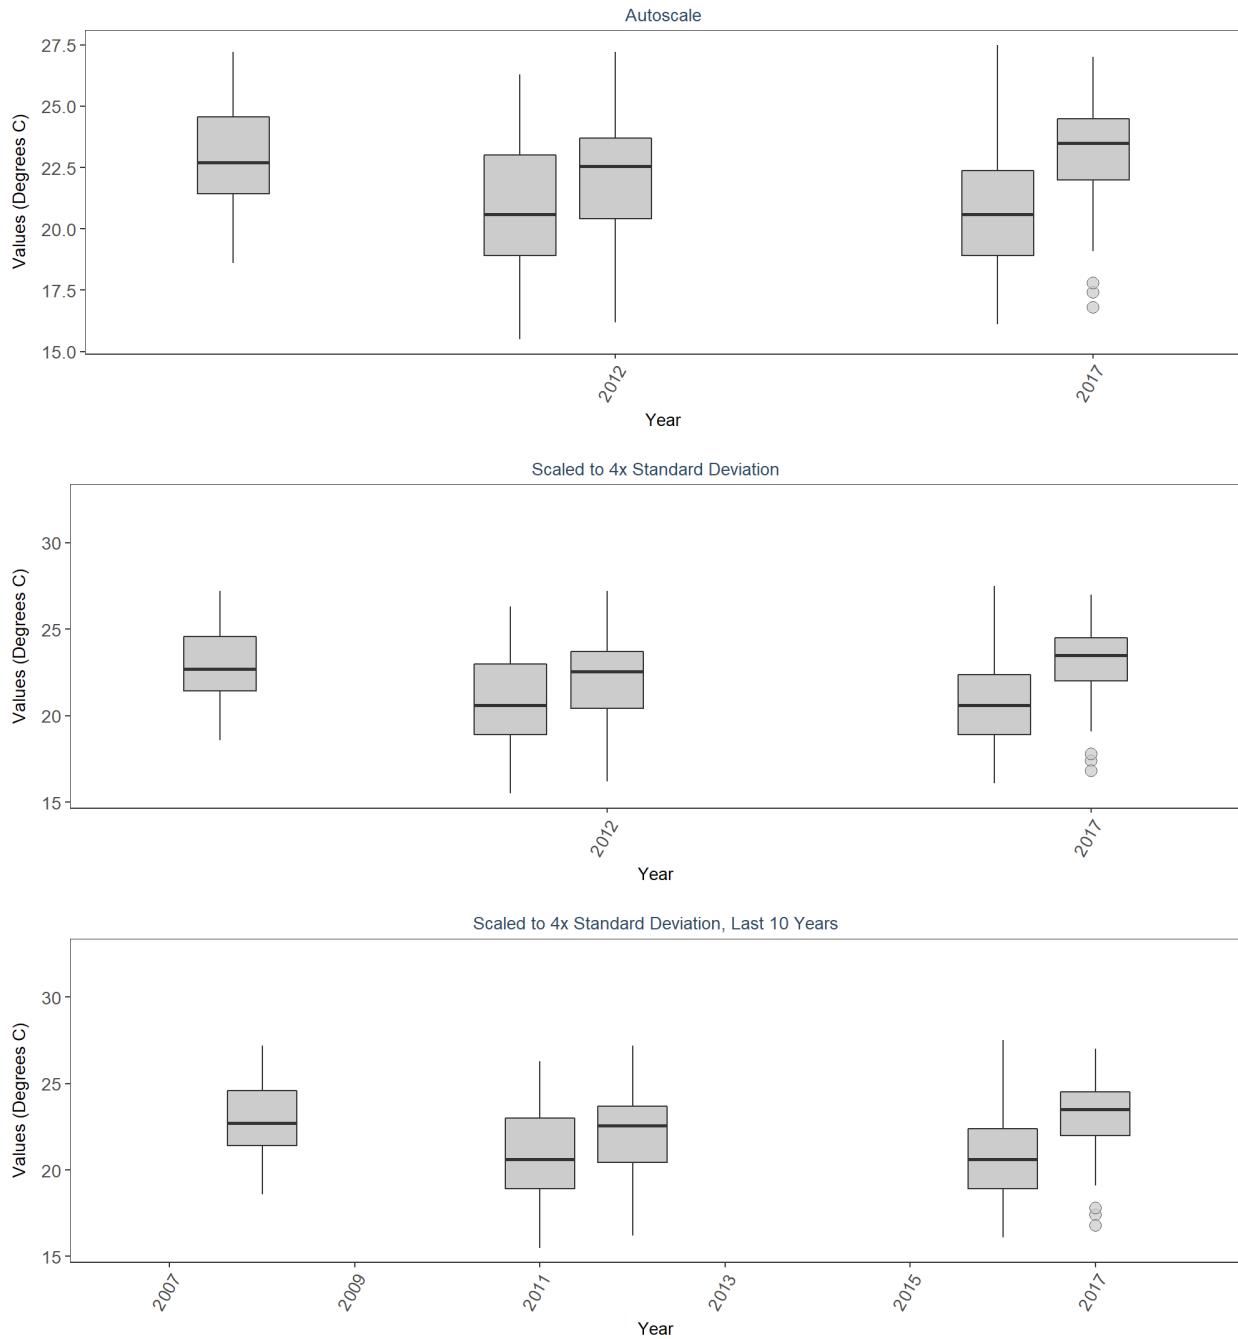

Rookery Bay National Estuarine Research Reserve

7


National Water Information System

255123081321300


By Year & Month

Month 1 2 3


Autoscale

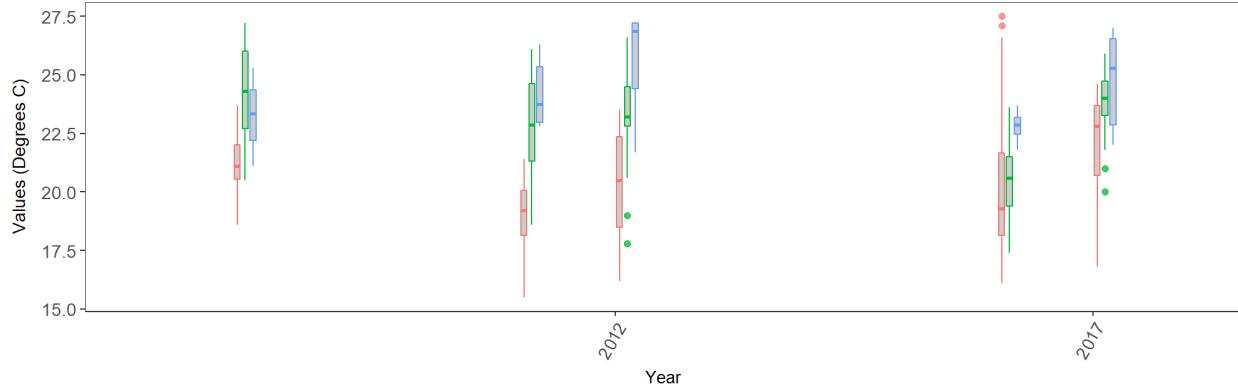

Scaled to 4x Standard Deviation

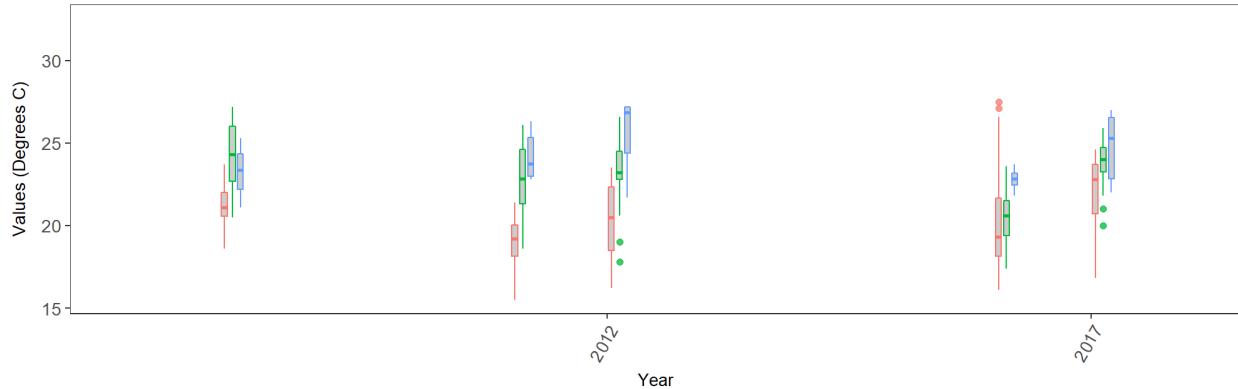

Scaled to 4x Standard Deviation, Last 10 Years

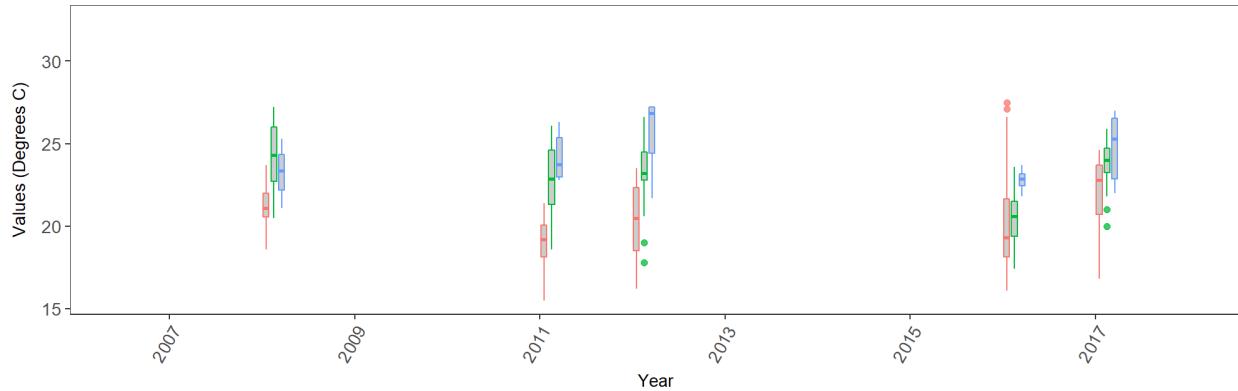

Rookery Bay National Estuarine Research Reserve

7


National Water Information System

255123081321300


By Month

Month 1 2 3


Autoscale

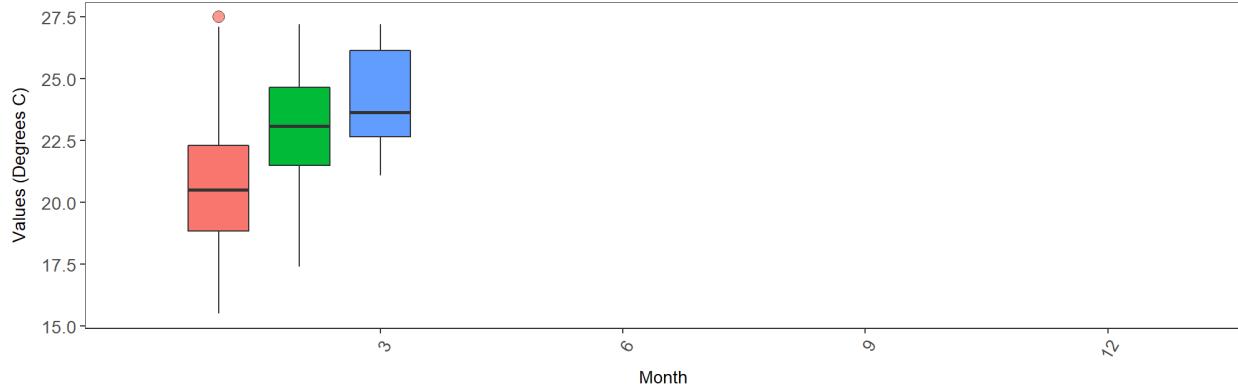


Scaled to 4x Standard Deviation

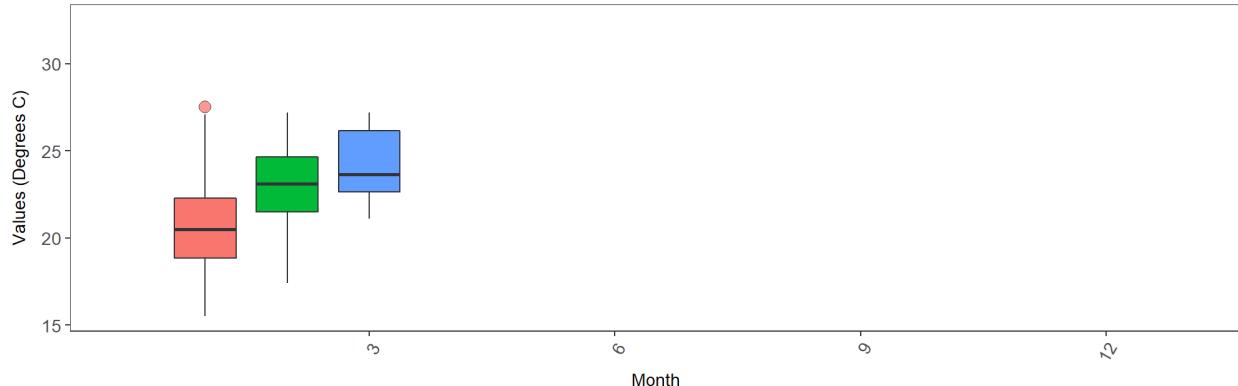

Scaled to 4x Standard Deviation, Last 10 Years

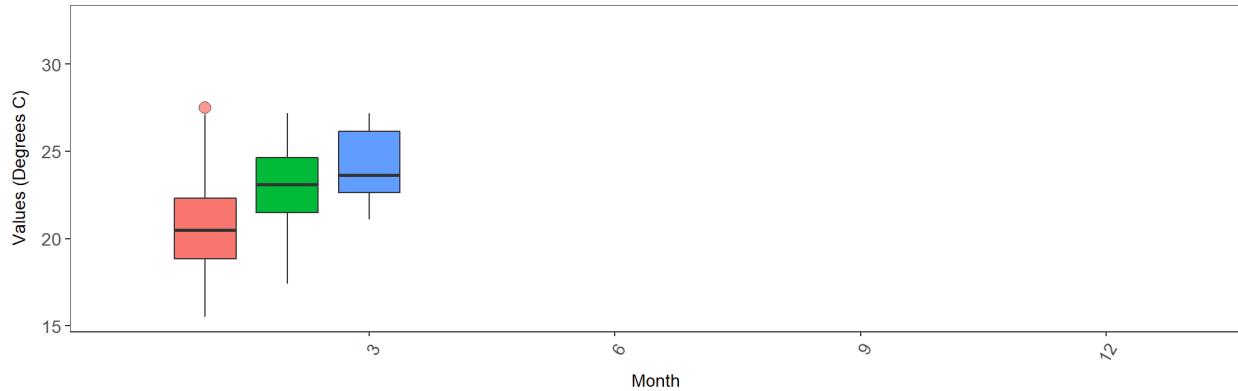


Rookery Bay National Estuarine Research Reserve  
7  
National Water Information System  
255432081303900  
By Year

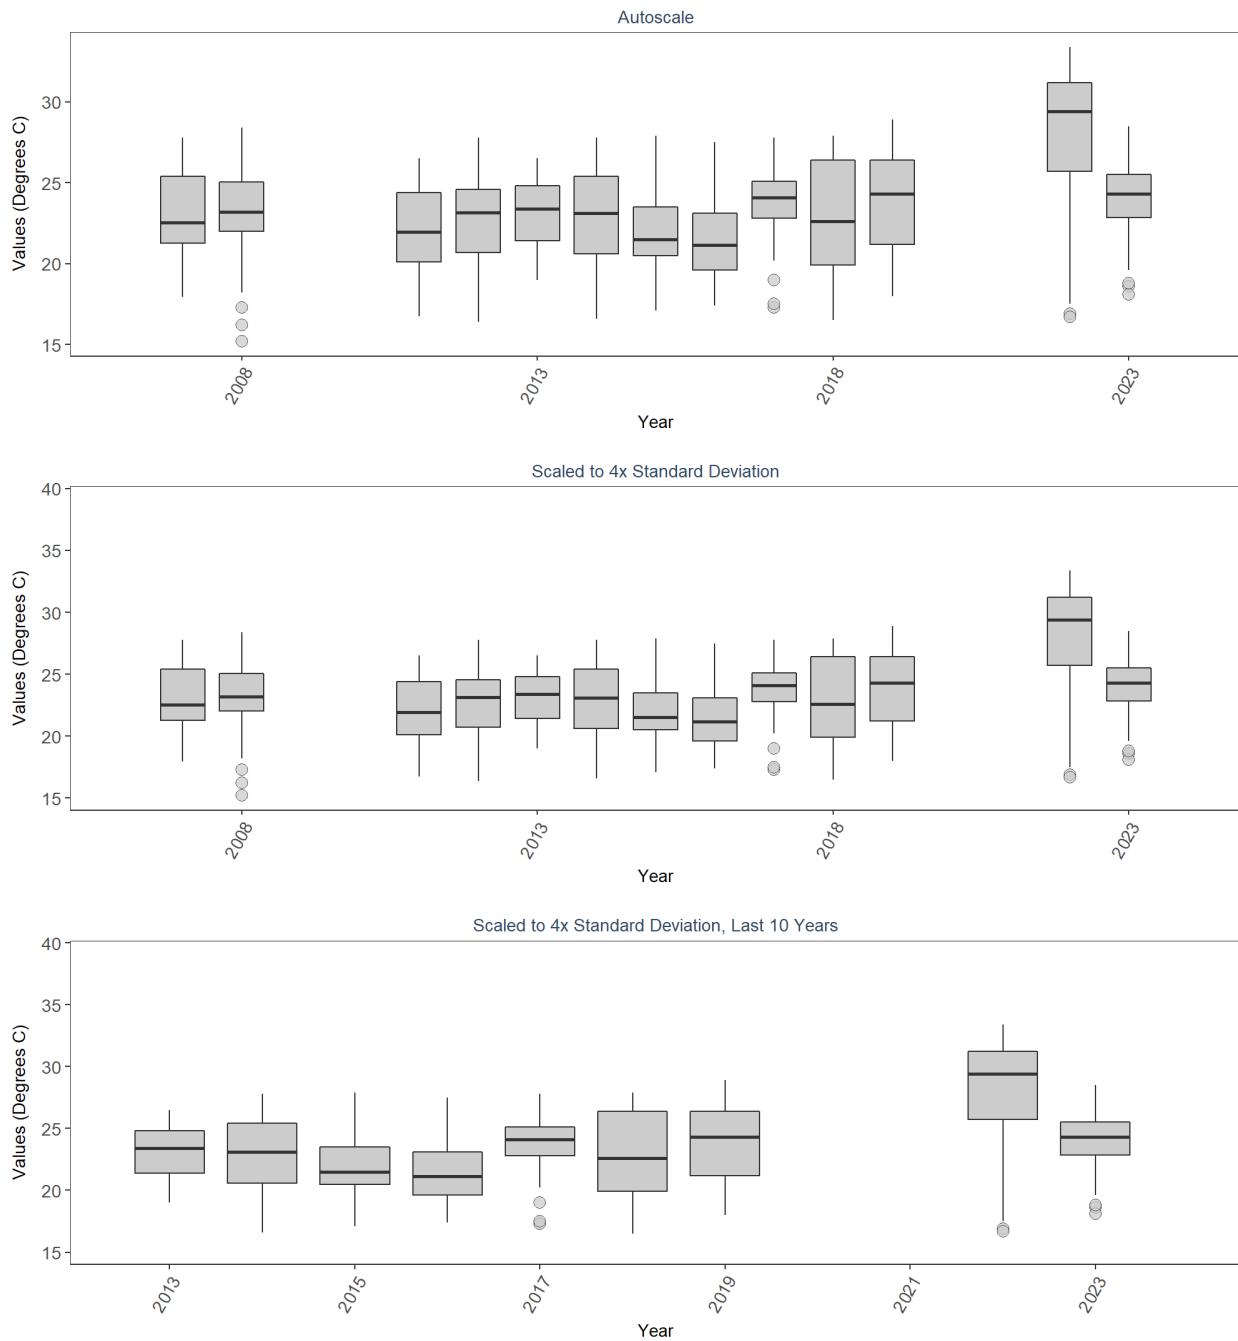


Rookery Bay National Estuarine Research Reserve  
 7  
 National Water Information System  
 255432081303900  
 By Year & Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

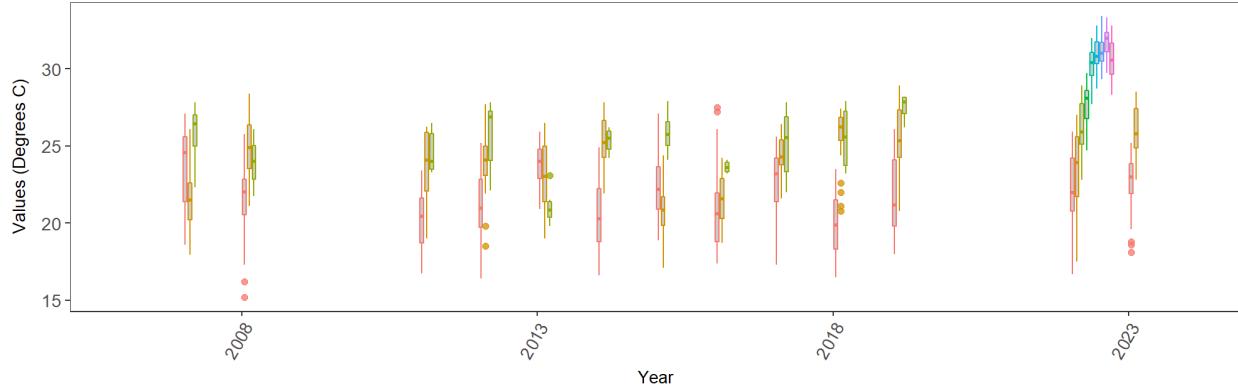

Scaled to 4x Standard Deviation

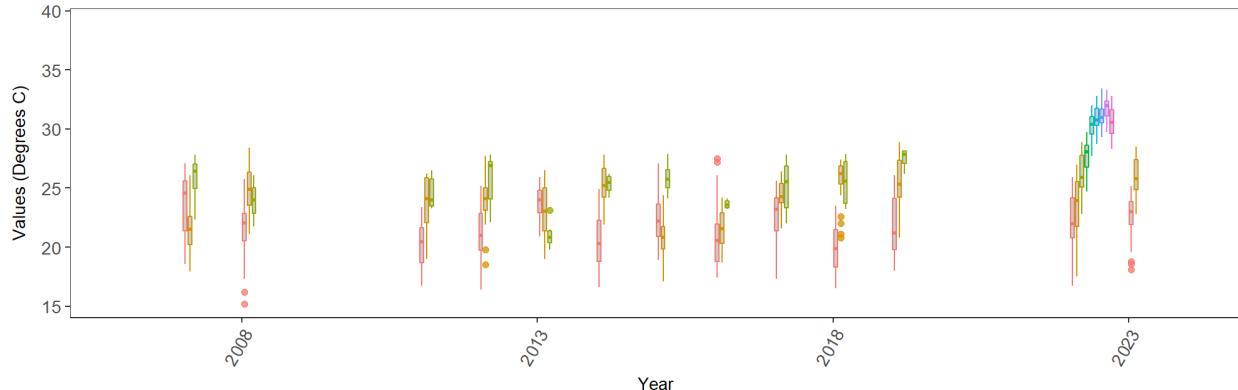

Scaled to 4x Standard Deviation, Last 10 Years

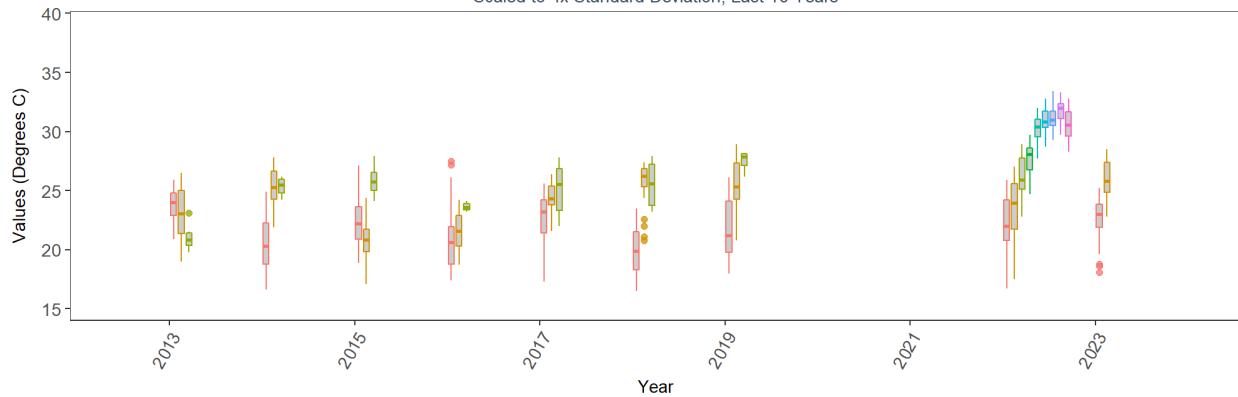

Rookery Bay National Estuarine Research Reserve

7


National Water Information System

255432081303900


By Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

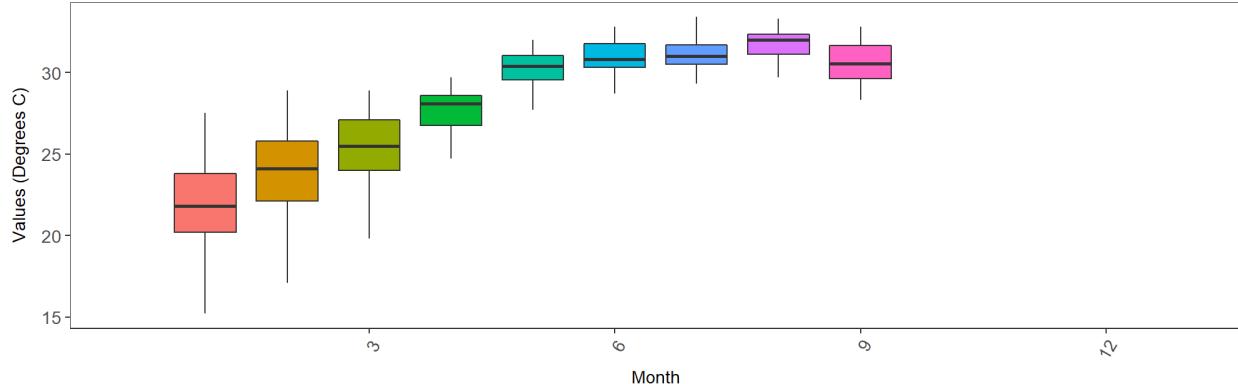


Scaled to 4x Standard Deviation

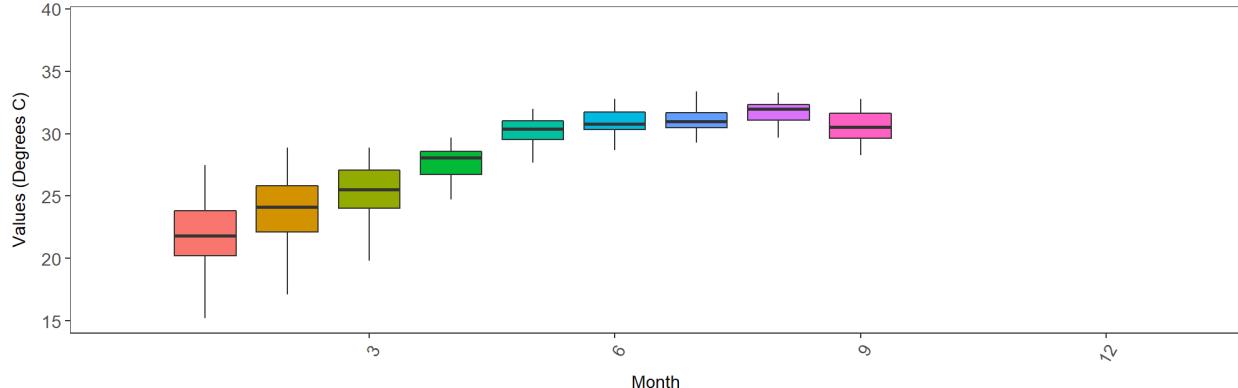


Scaled to 4x Standard Deviation, Last 10 Years

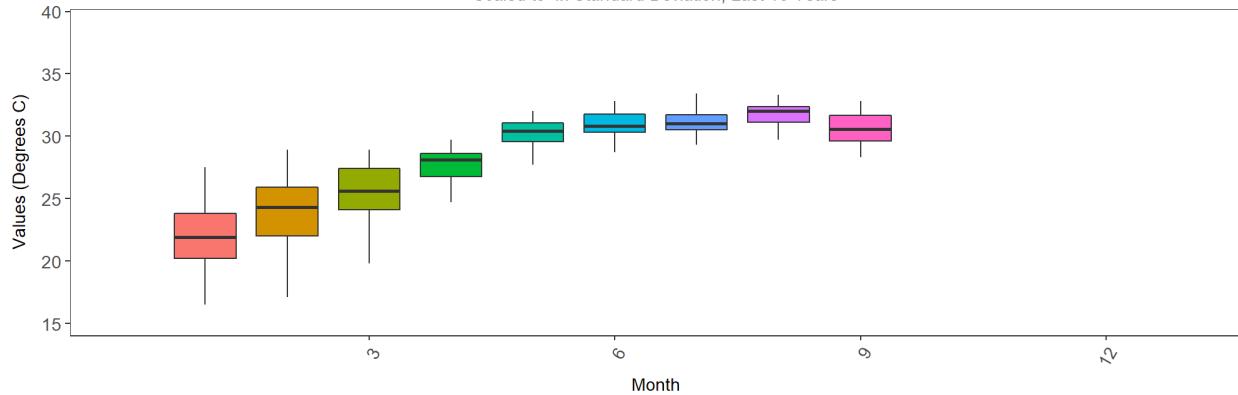




Rookery Bay National Estuarine Research Reserve  
7  
National Water Information System  
255534081324000  
By Year

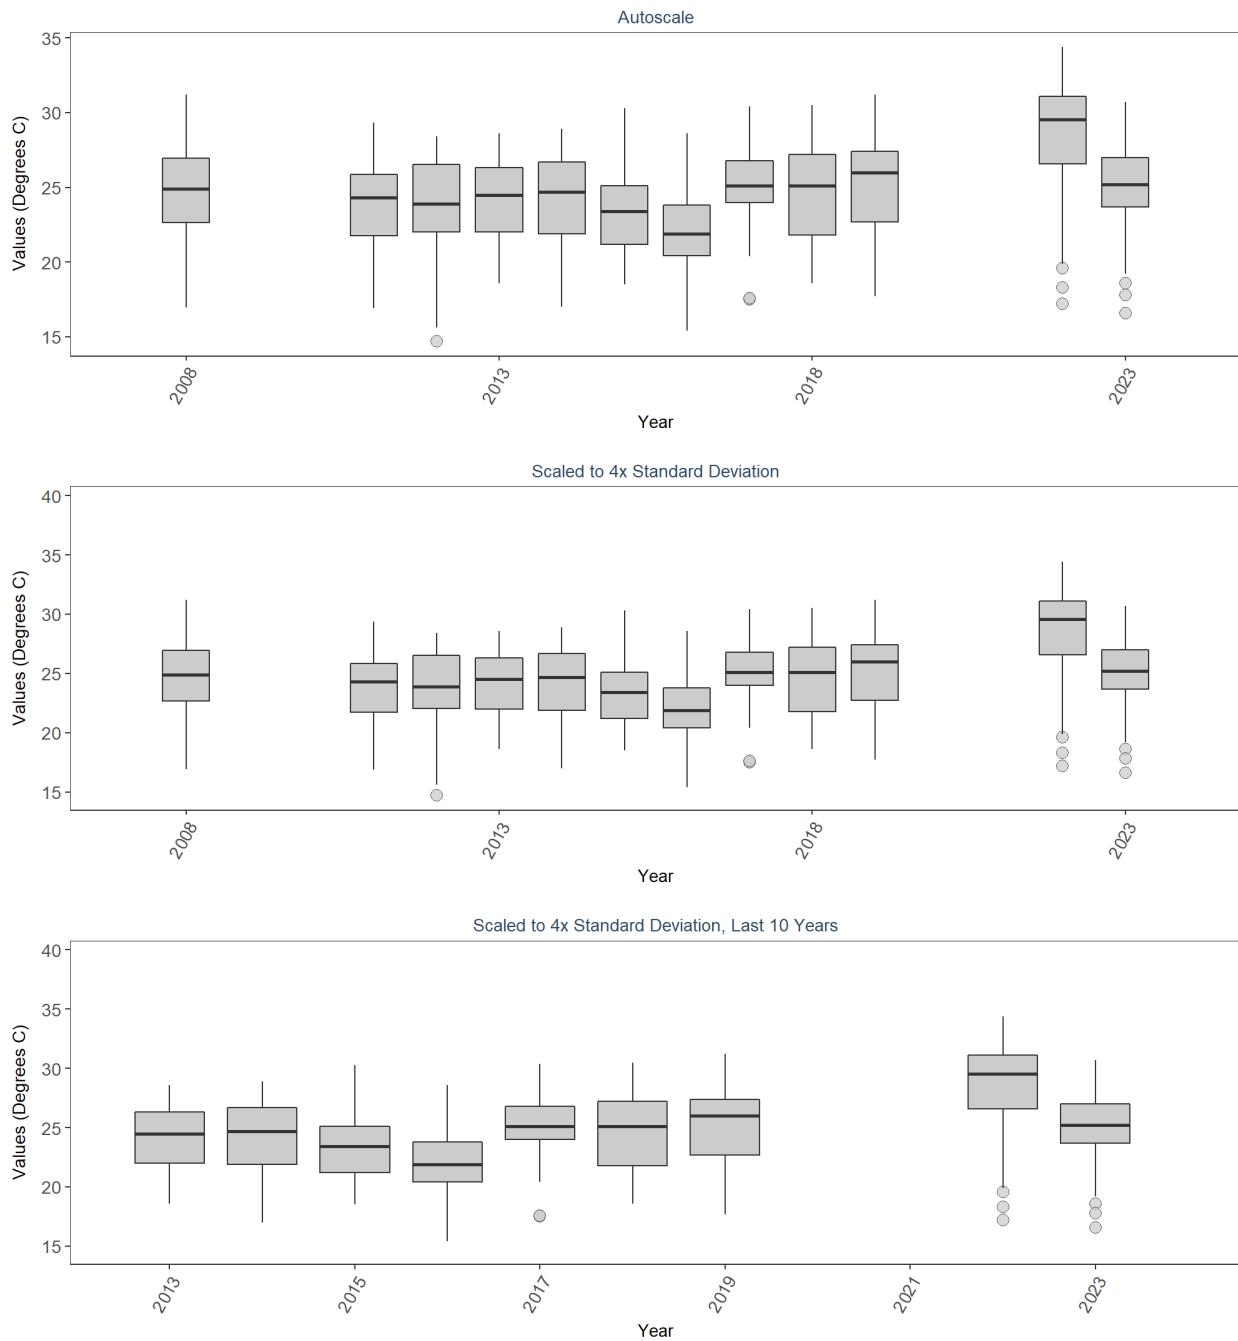


Rookery Bay National Estuarine Research Reserve  
 7  
 National Water Information System  
 255534081324000  
 By Year & Month

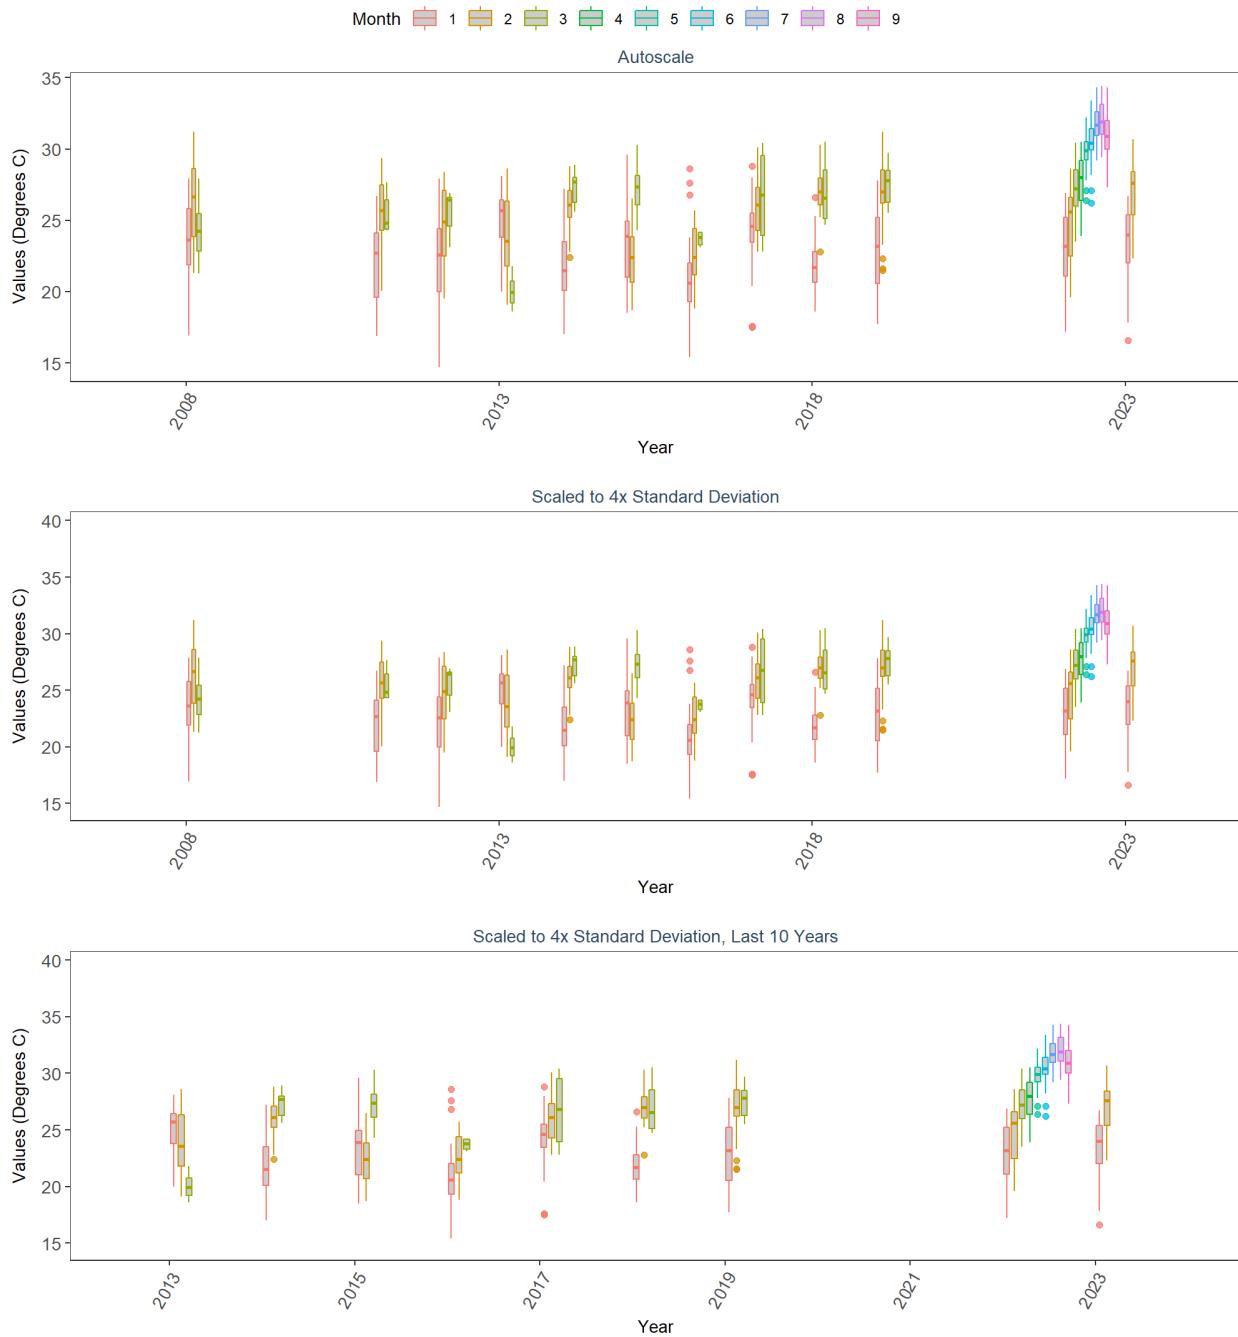

Rookery Bay National Estuarine Research Reserve  
 7  
 National Water Information System  
 255534081324000  
 By Month

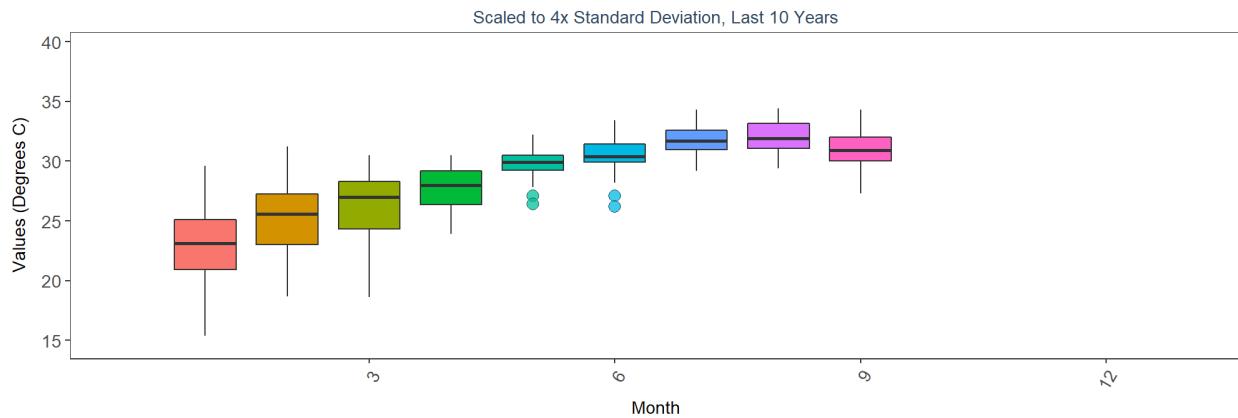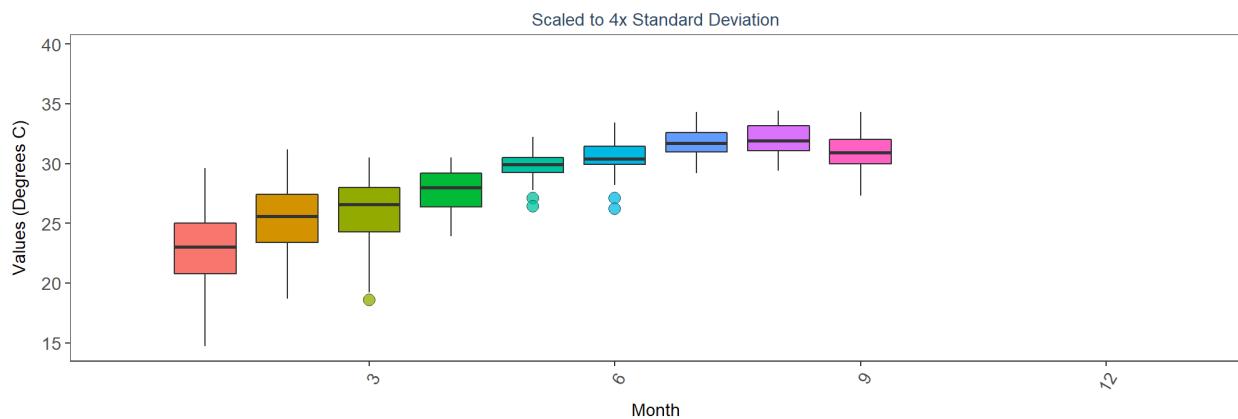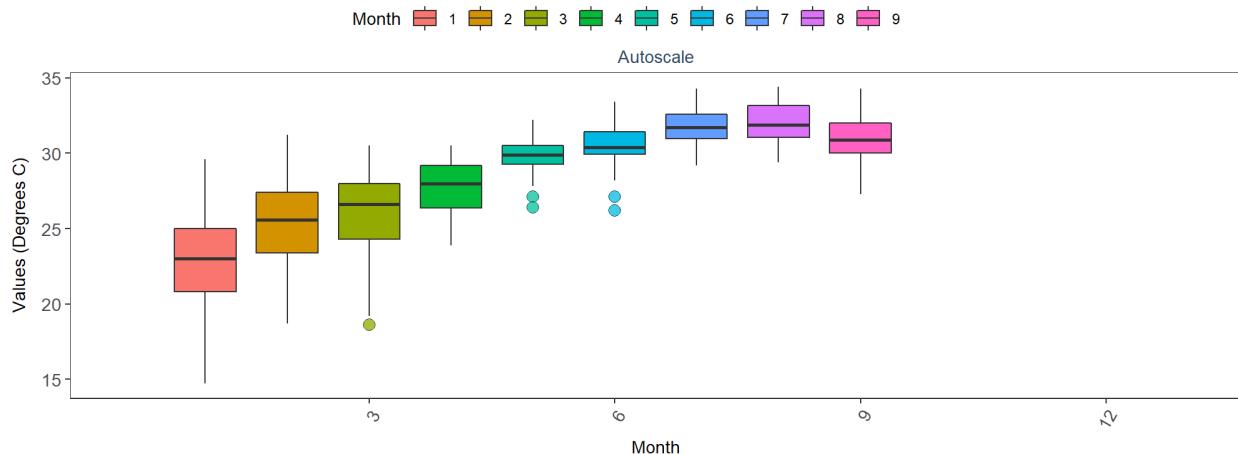

Rookery Bay National Estuarine Research Reserve  
 7  
 National Water Information System  
 255654081350200  
 By Year

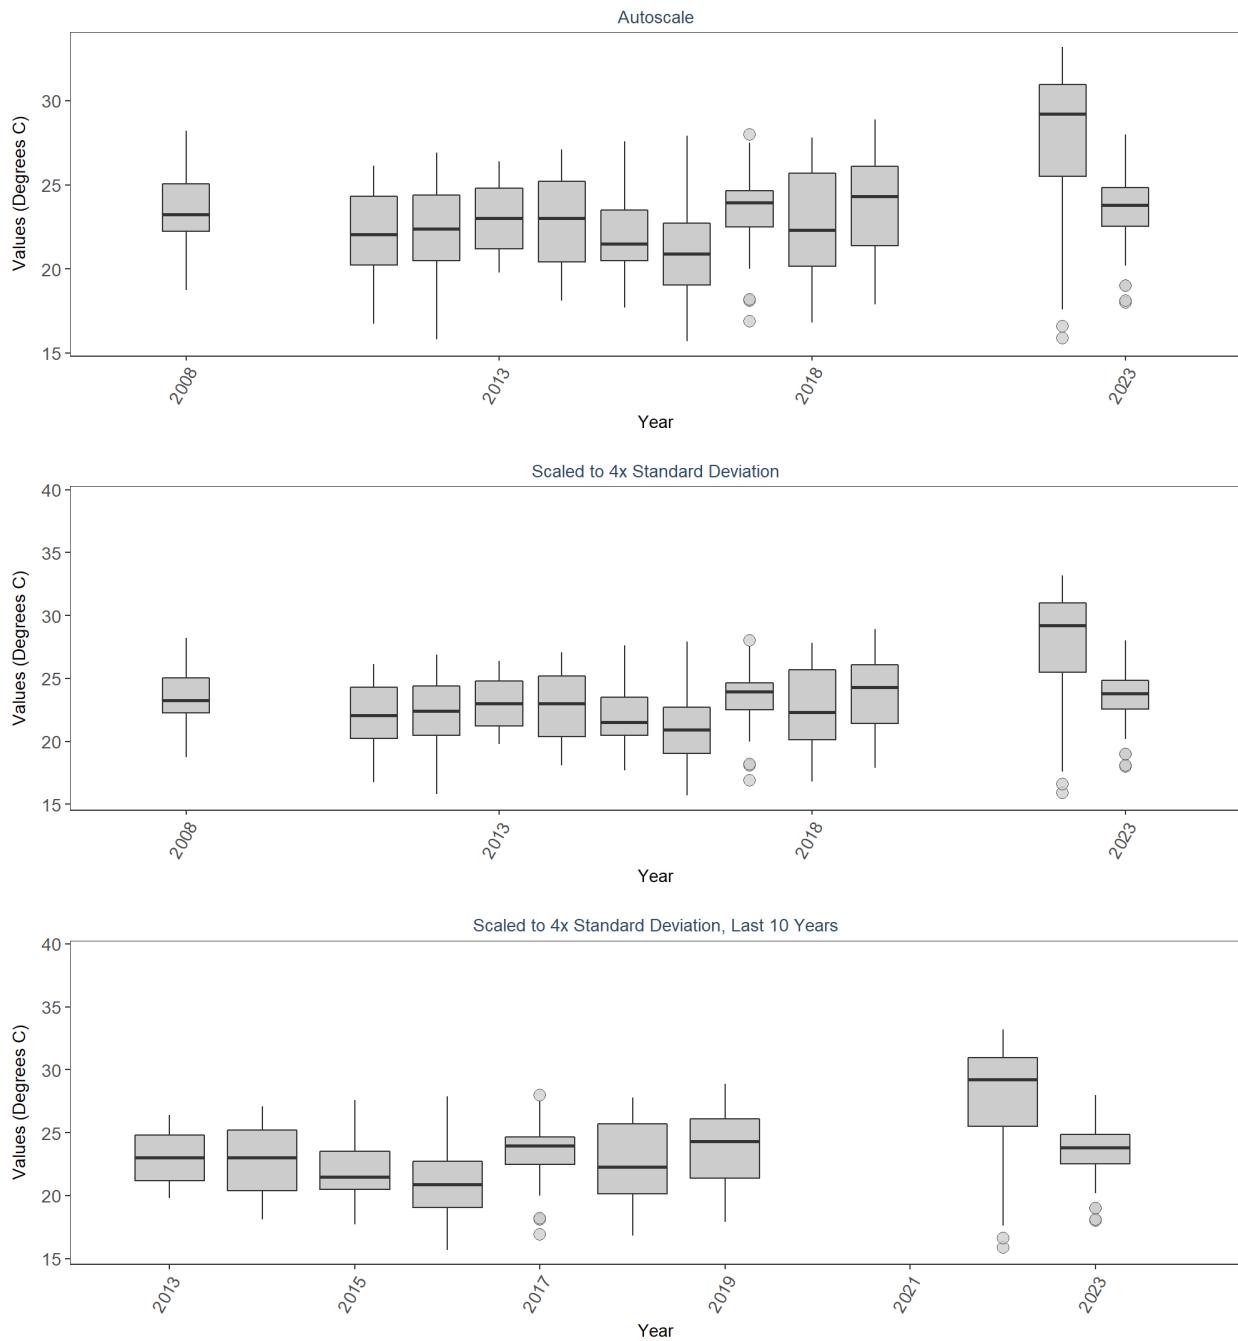

Rookery Bay National Estuarine Research Reserve

7


National Water Information System

255654081350200


By Year & Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

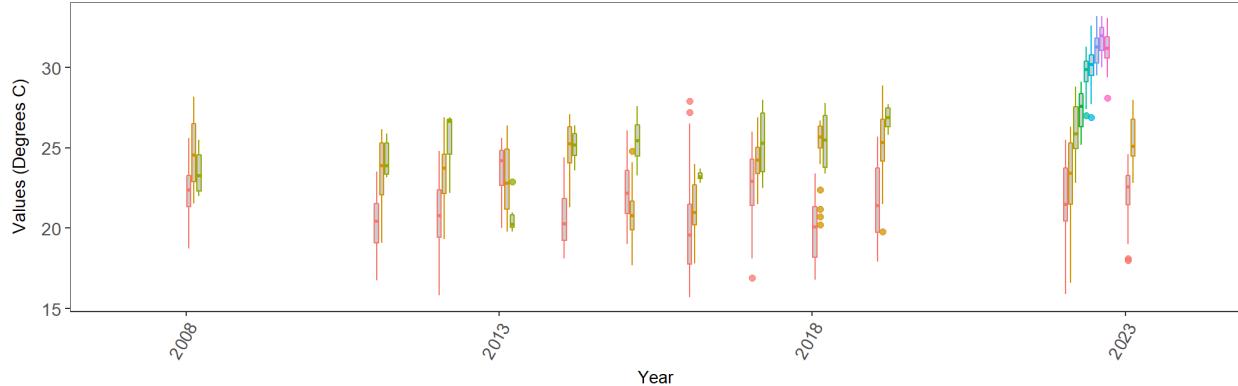

Scaled to 4x Standard Deviation

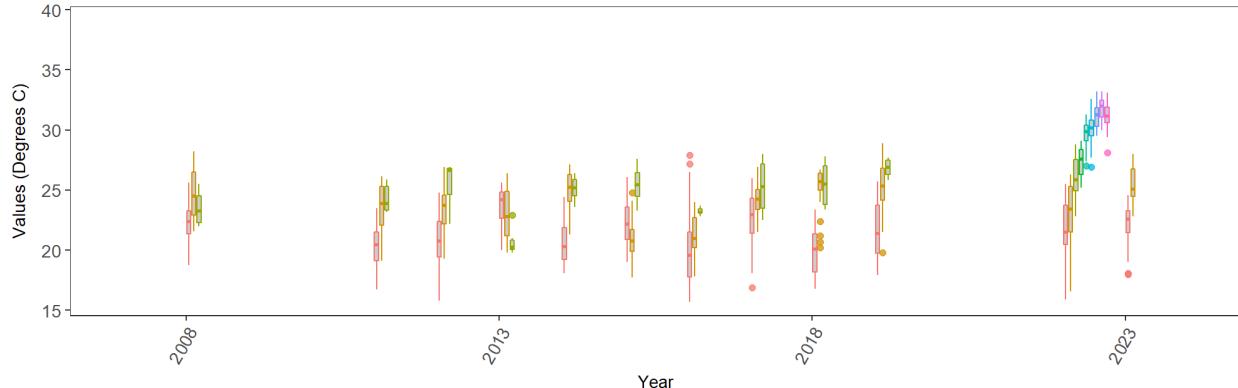

Scaled to 4x Standard Deviation, Last 10 Years

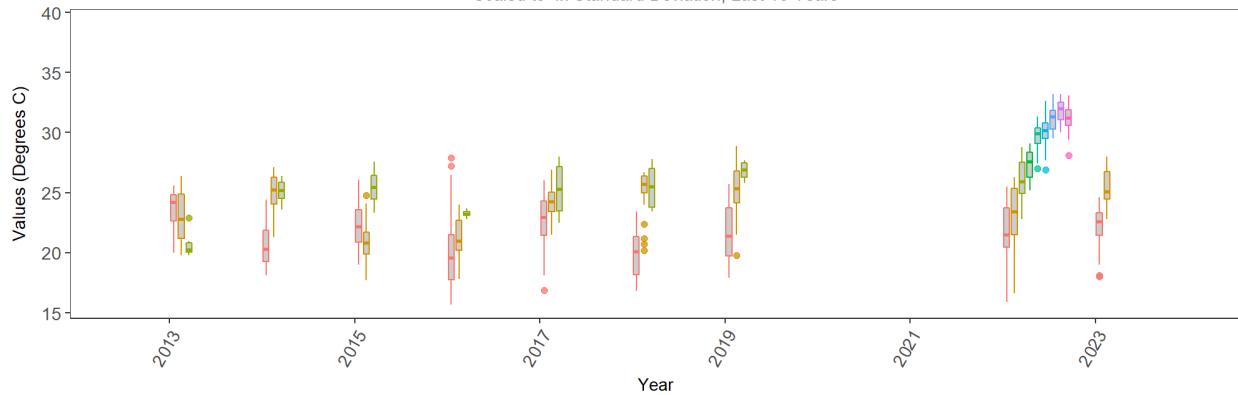

Rookery Bay National Estuarine Research Reserve

7


National Water Information System

255654081350200


By Month

Month 1 2 3 4 5 6 7 8 9


Autoscale

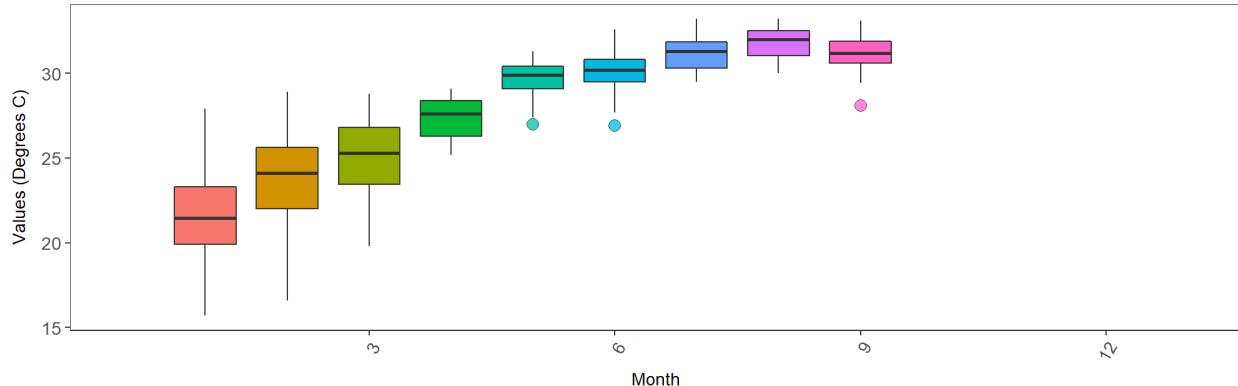


Scaled to 4x Standard Deviation

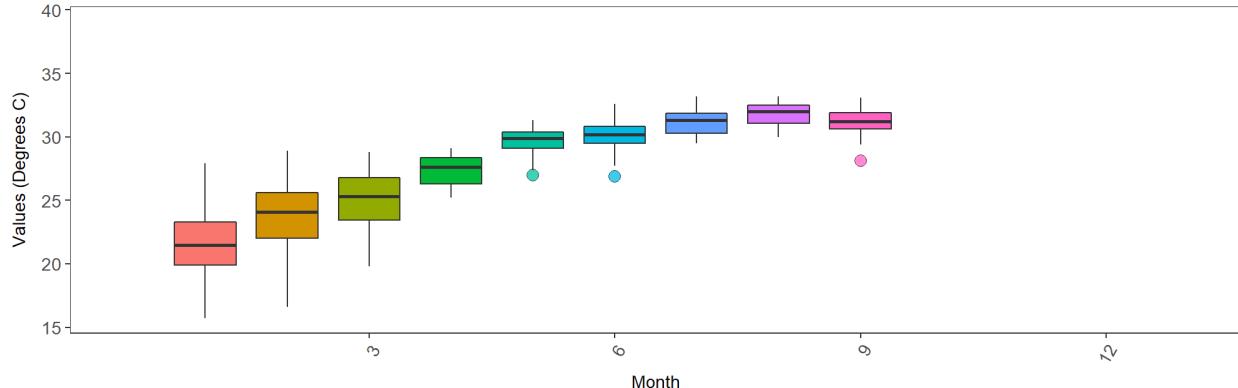


Scaled to 4x Standard Deviation, Last 10 Years

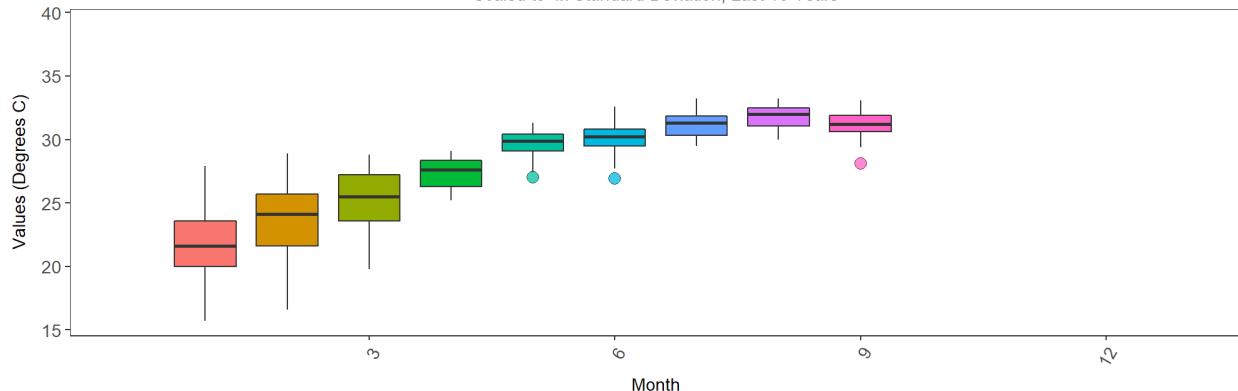


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbwq  
 By Year

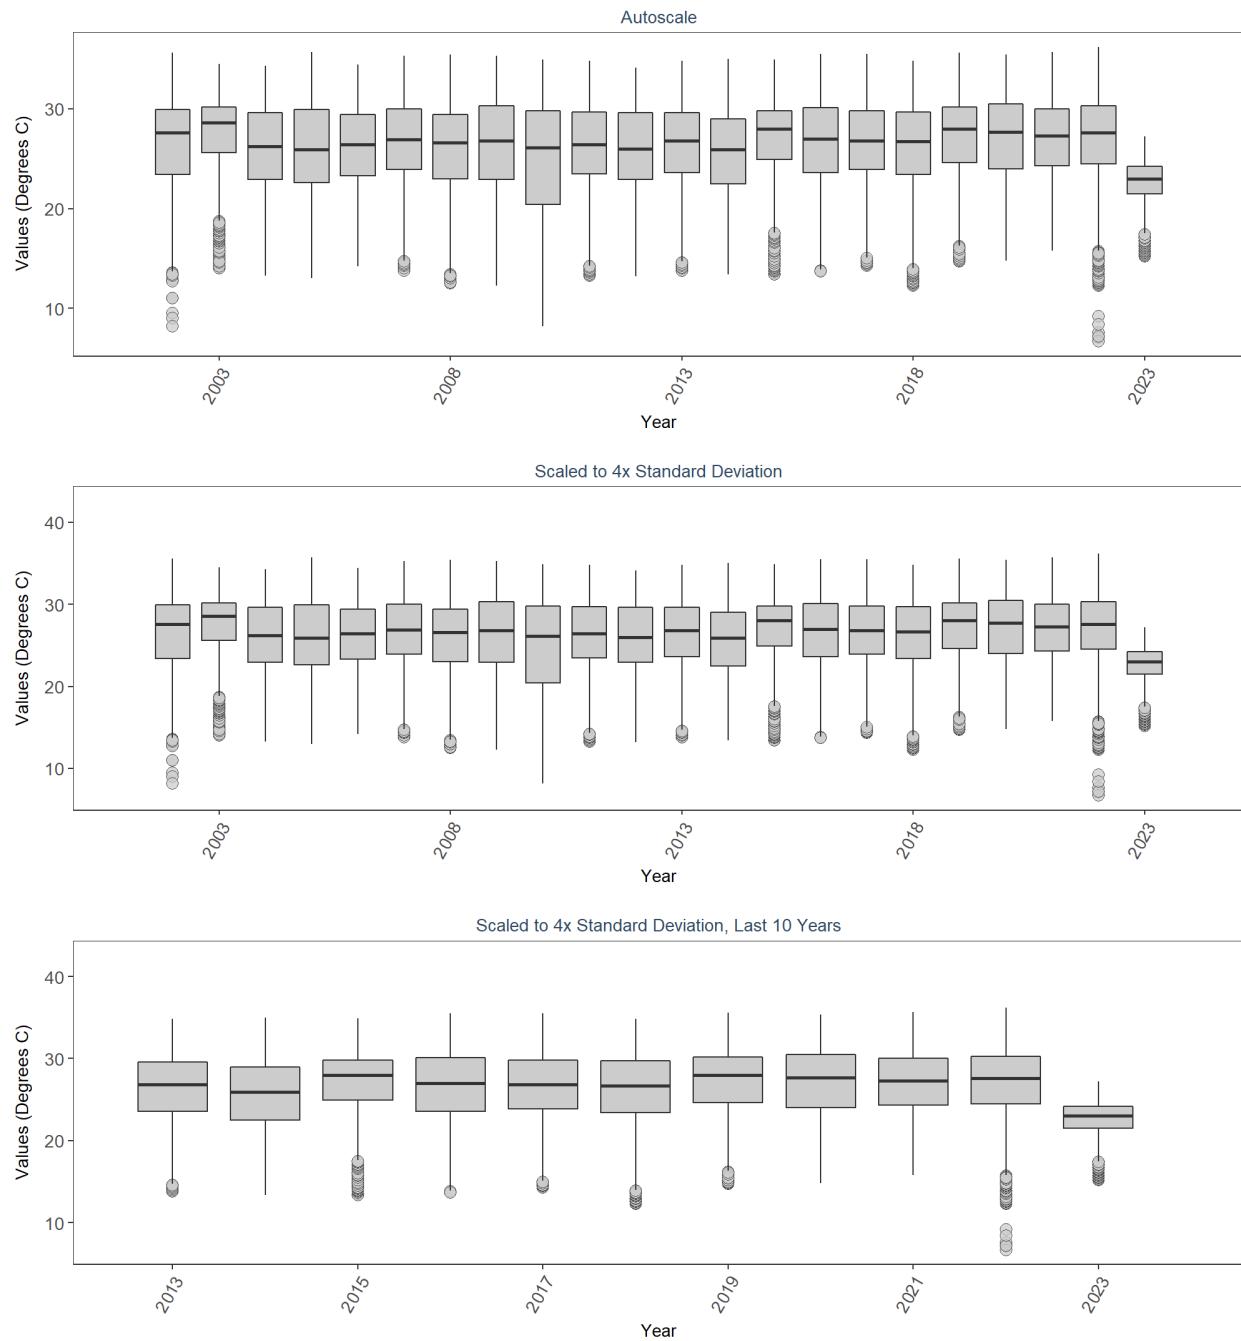


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbwq  
 By Year & Month

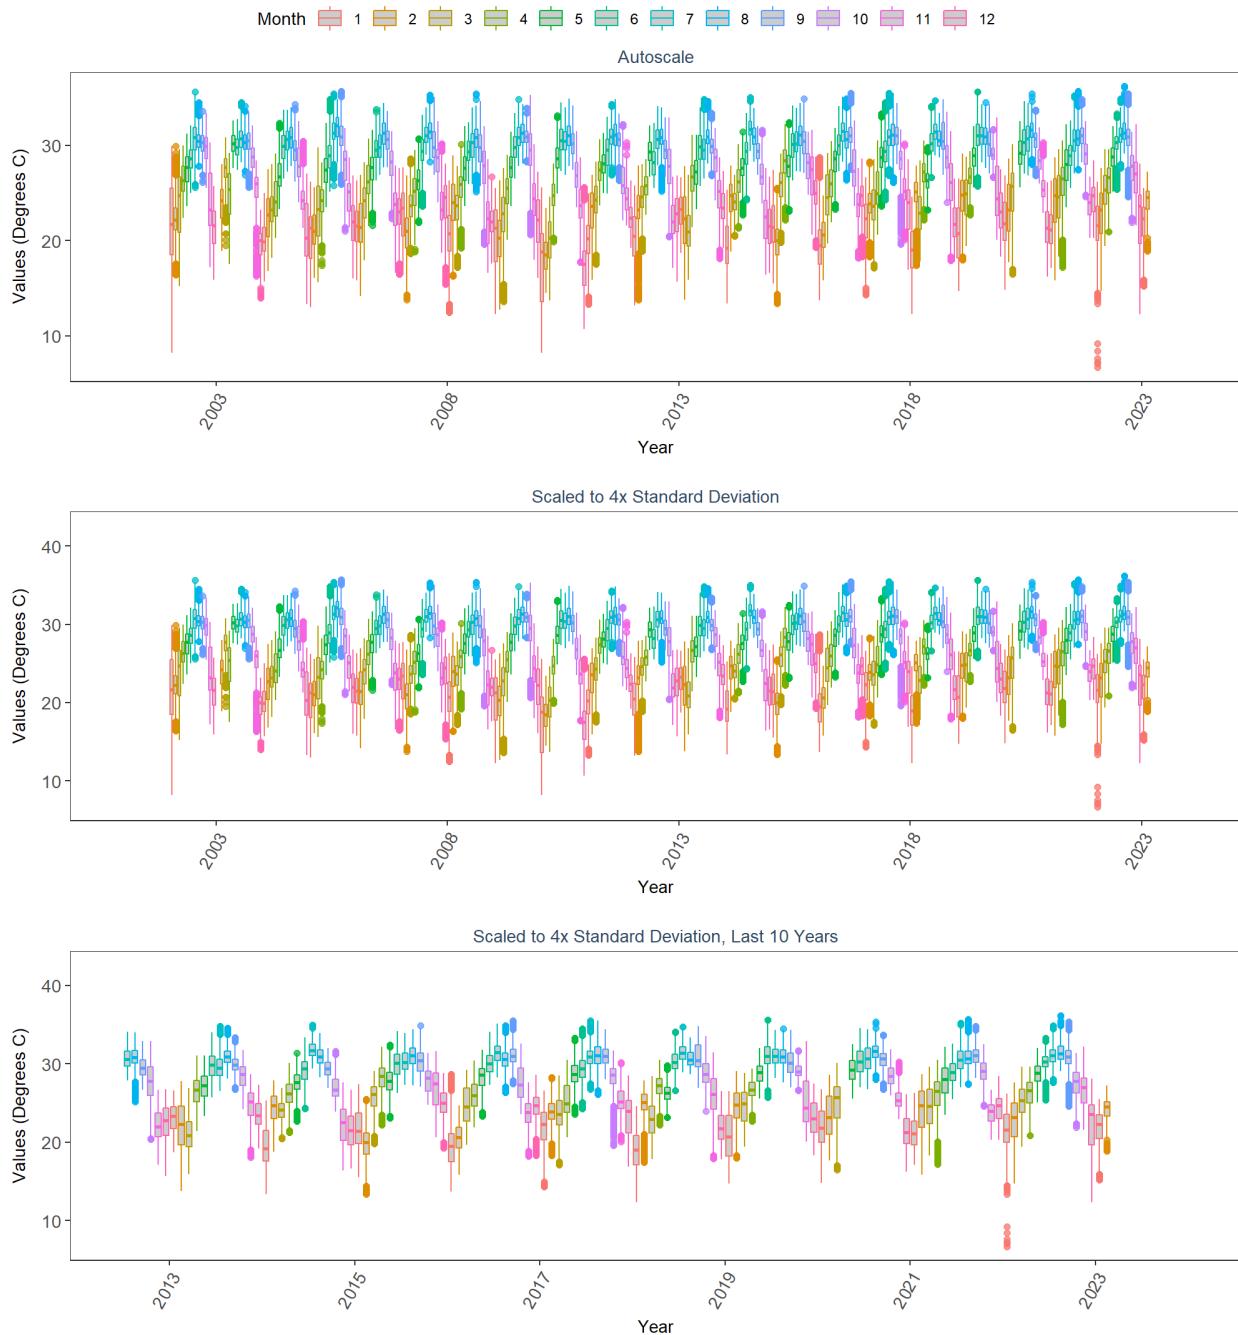


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkfbfwq  
 By Month

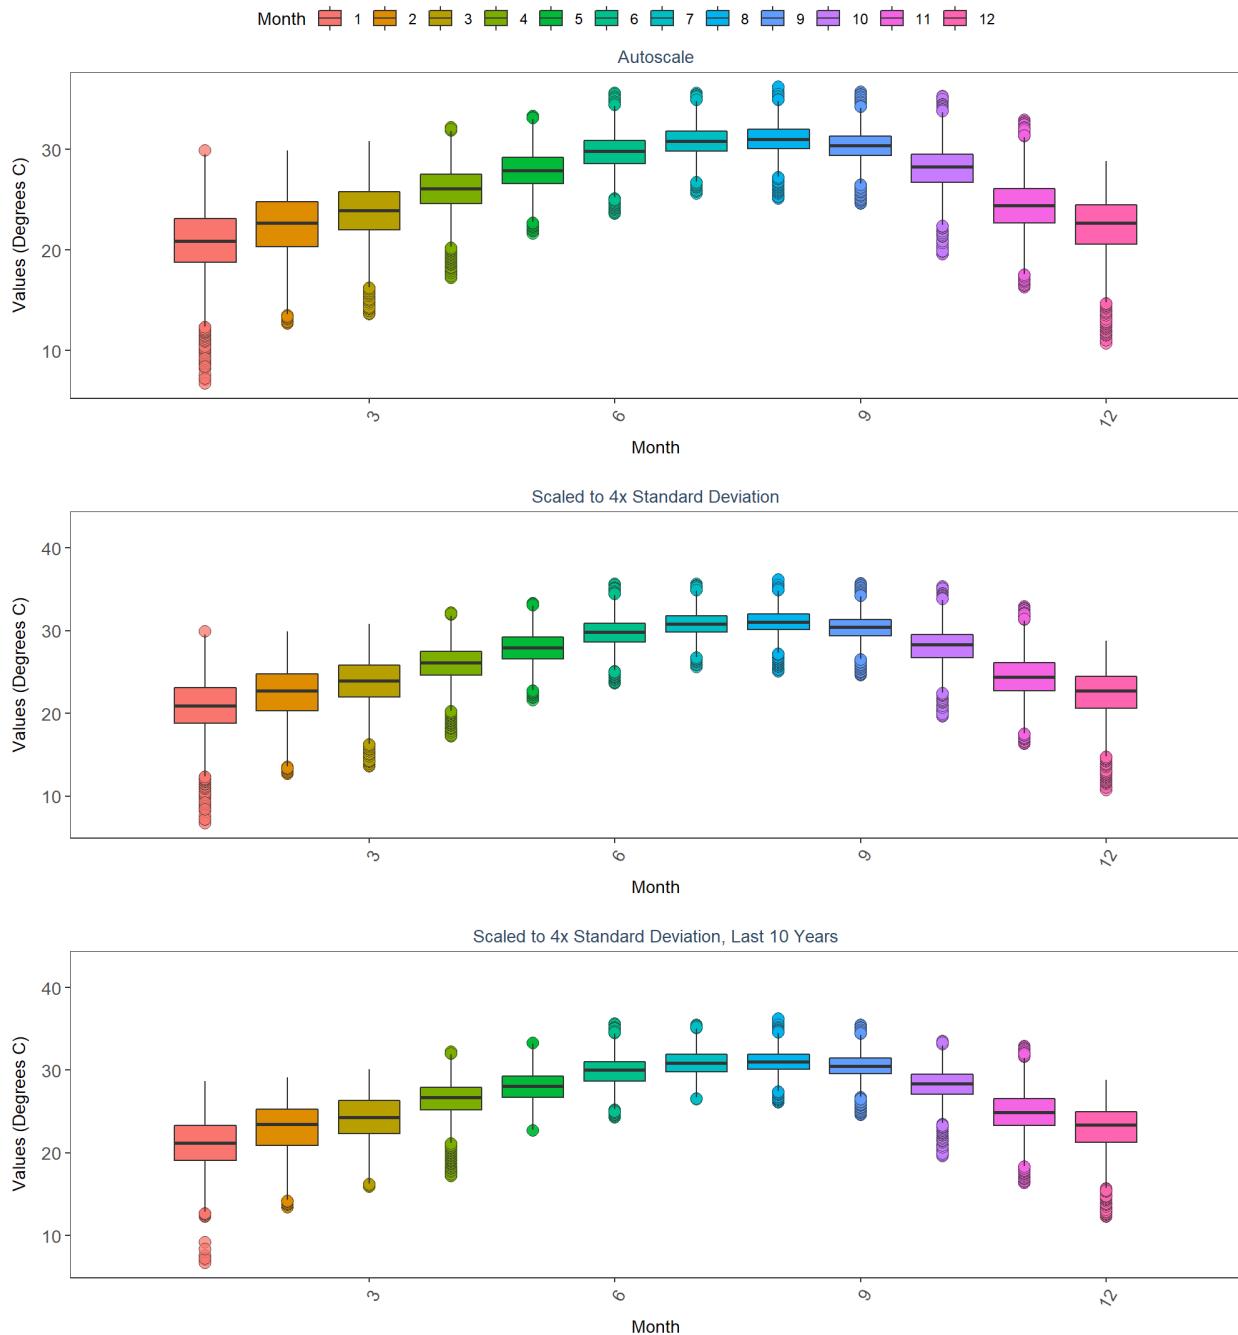


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 By Year

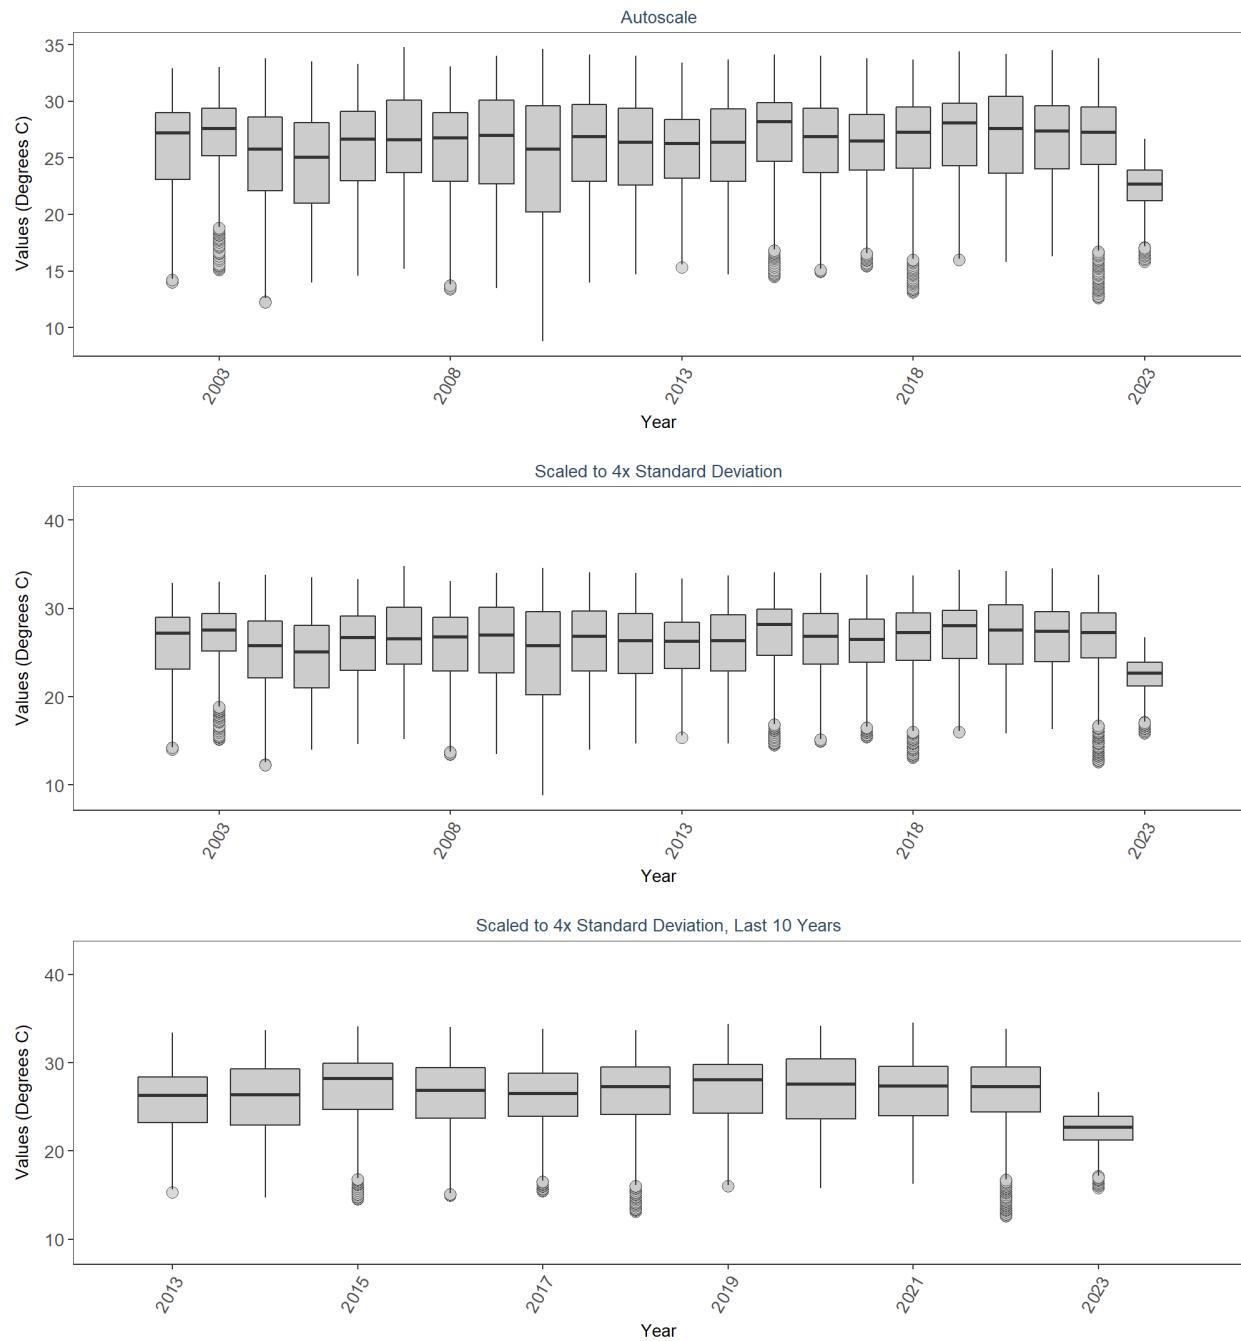


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 By Year & Month

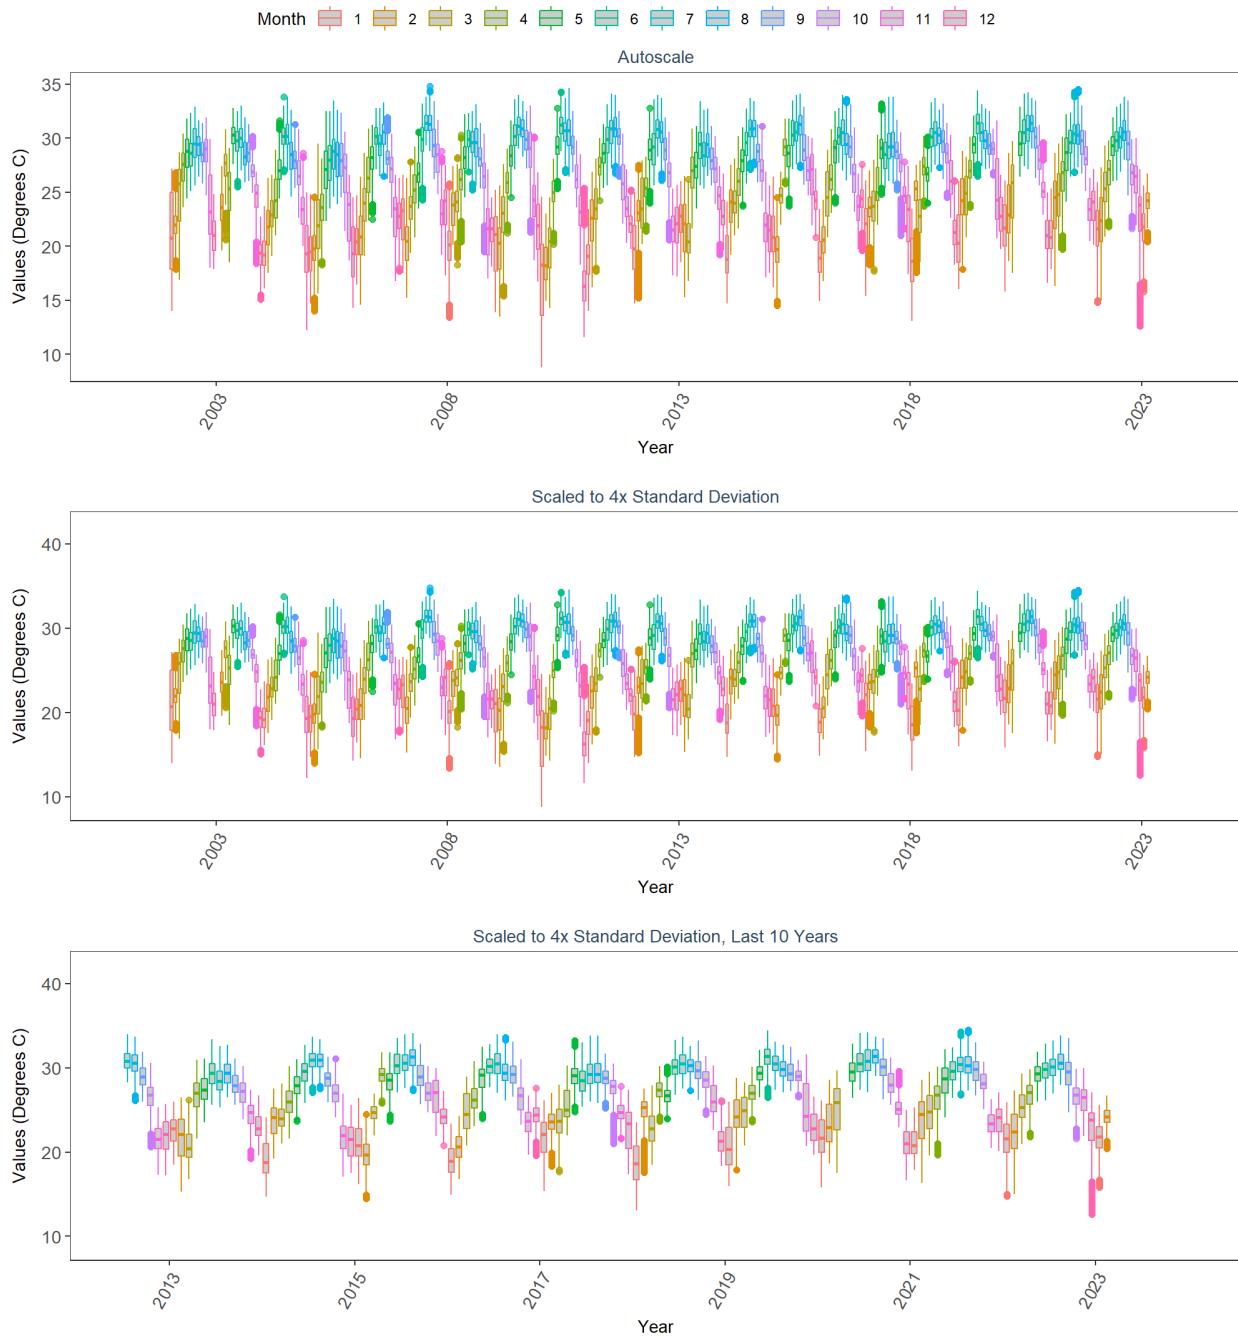


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbfuwq  
 By Month

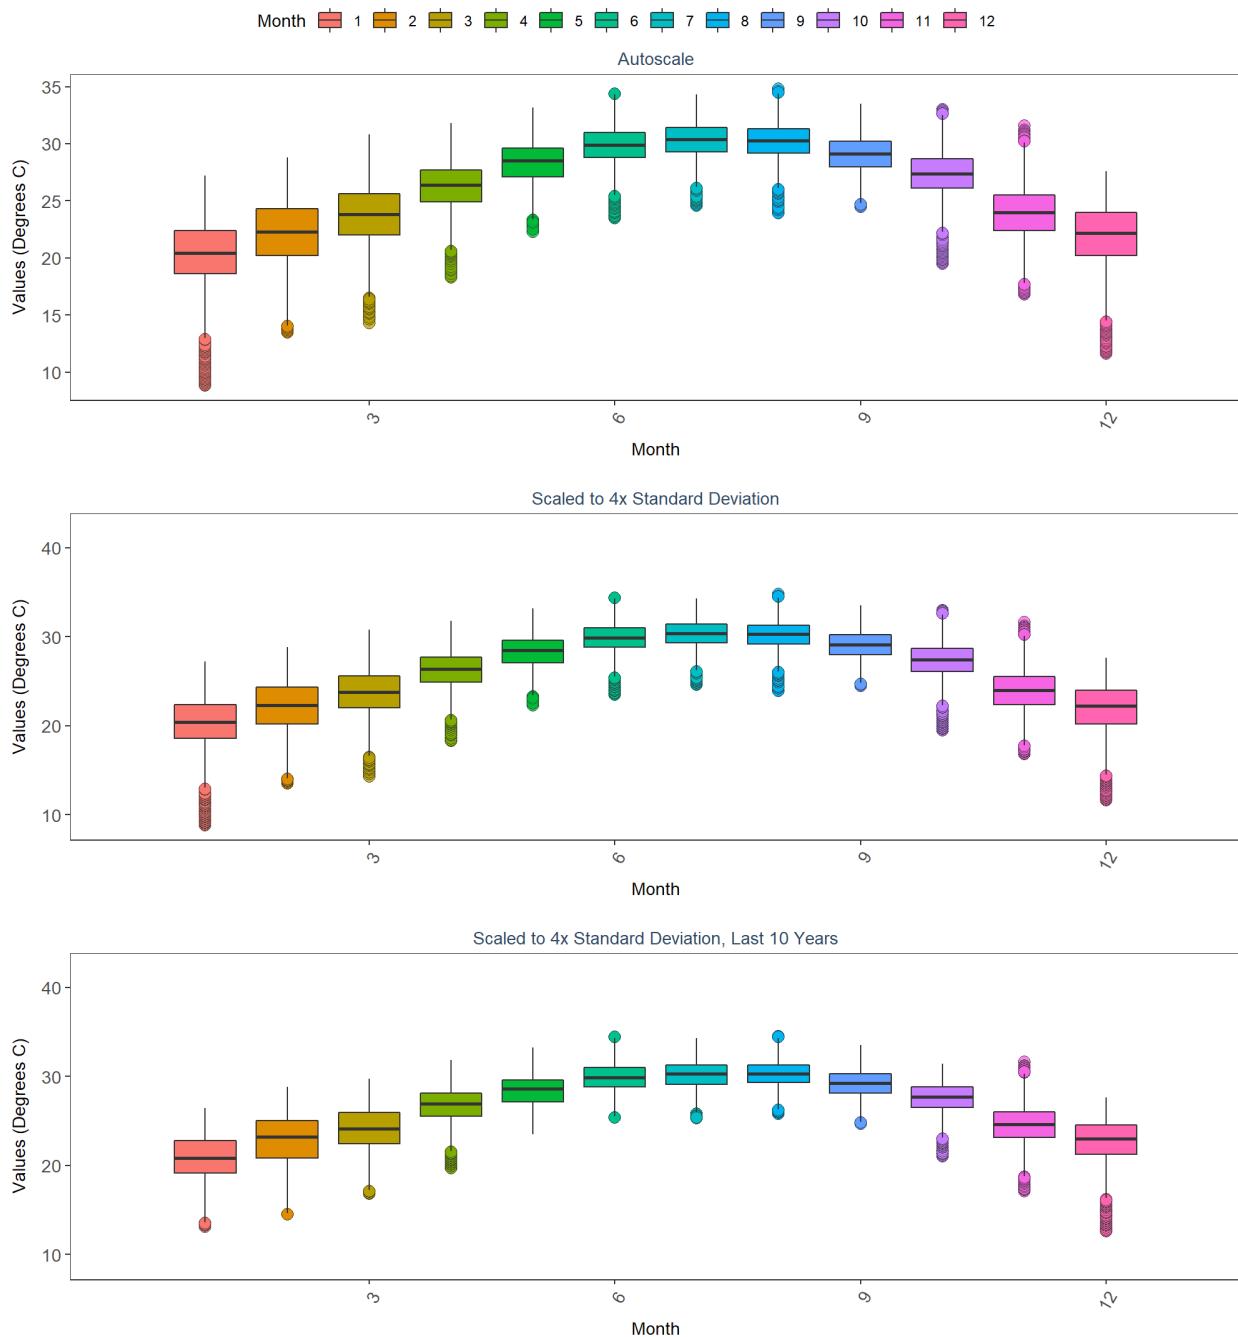


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rklhwq  
 By Year

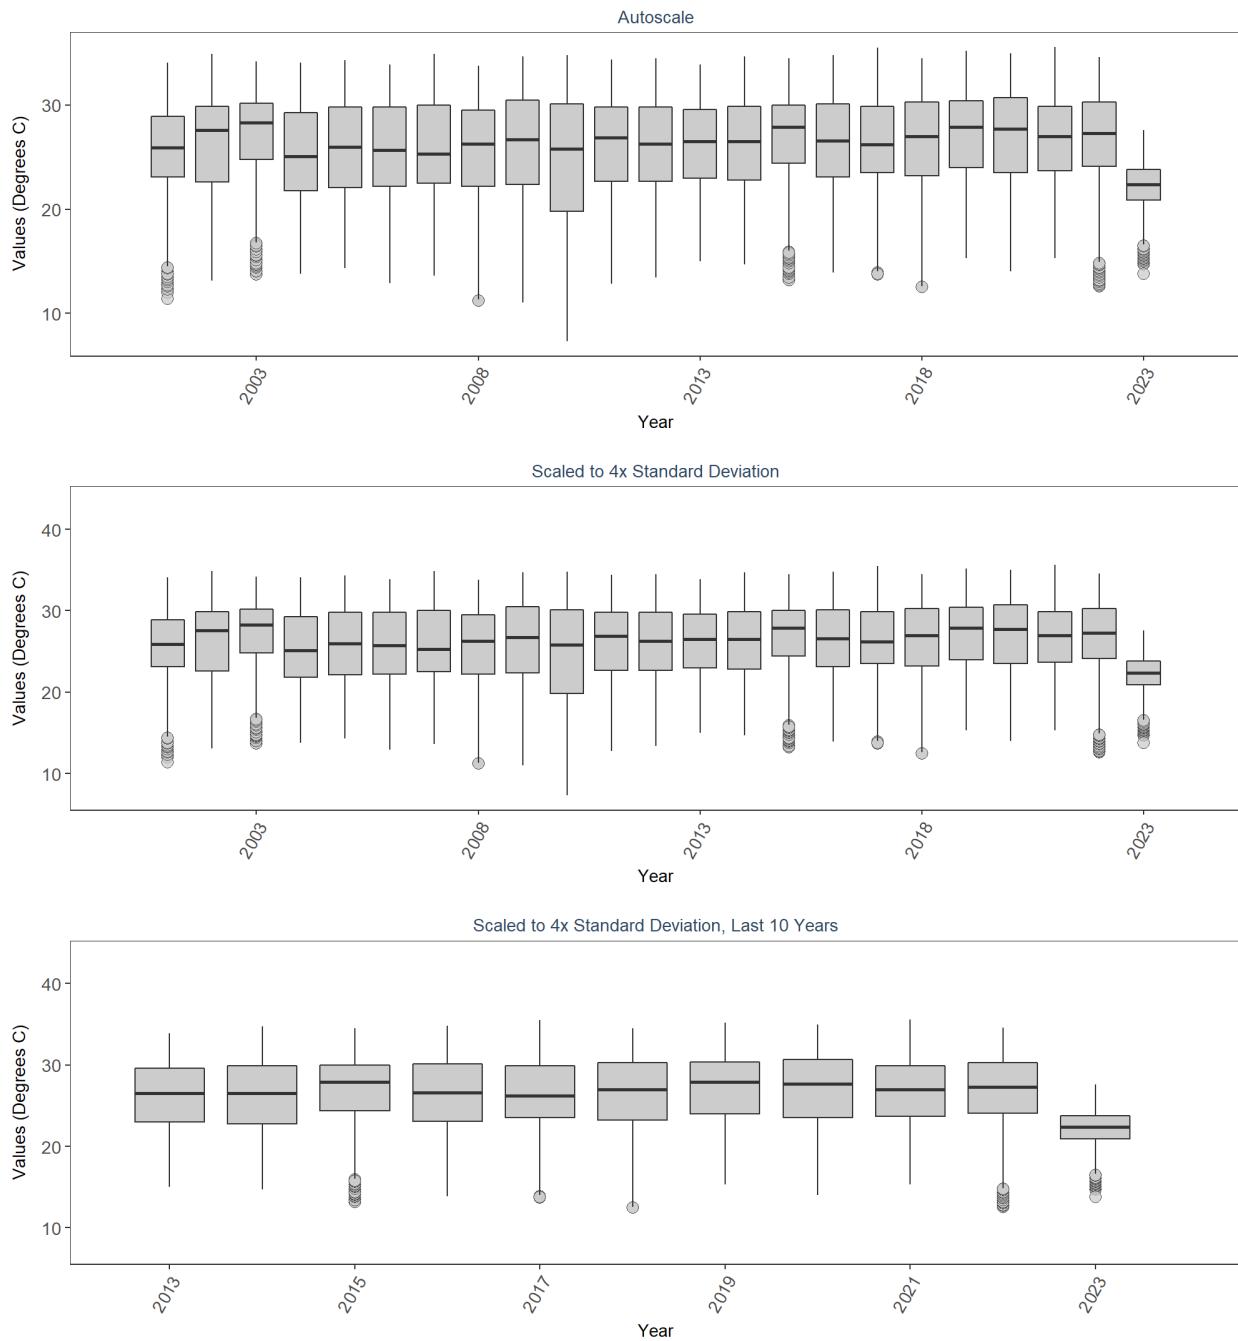


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbhwq  
 By Year & Month

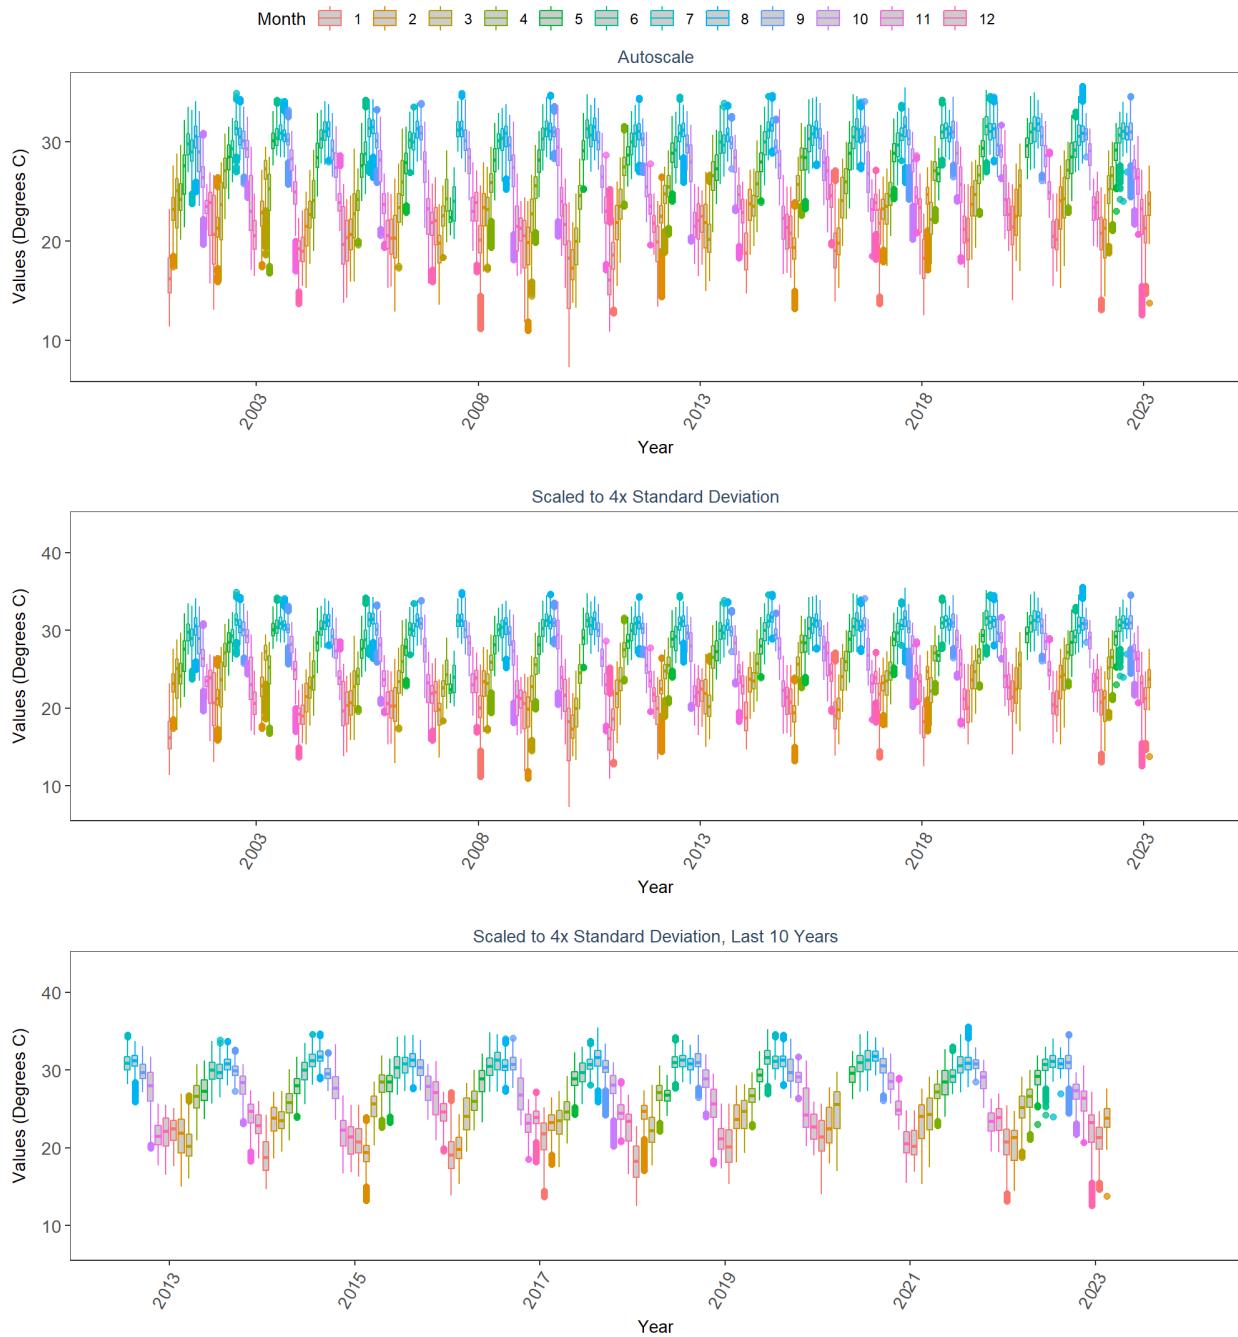


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rklhwq  
 By Month

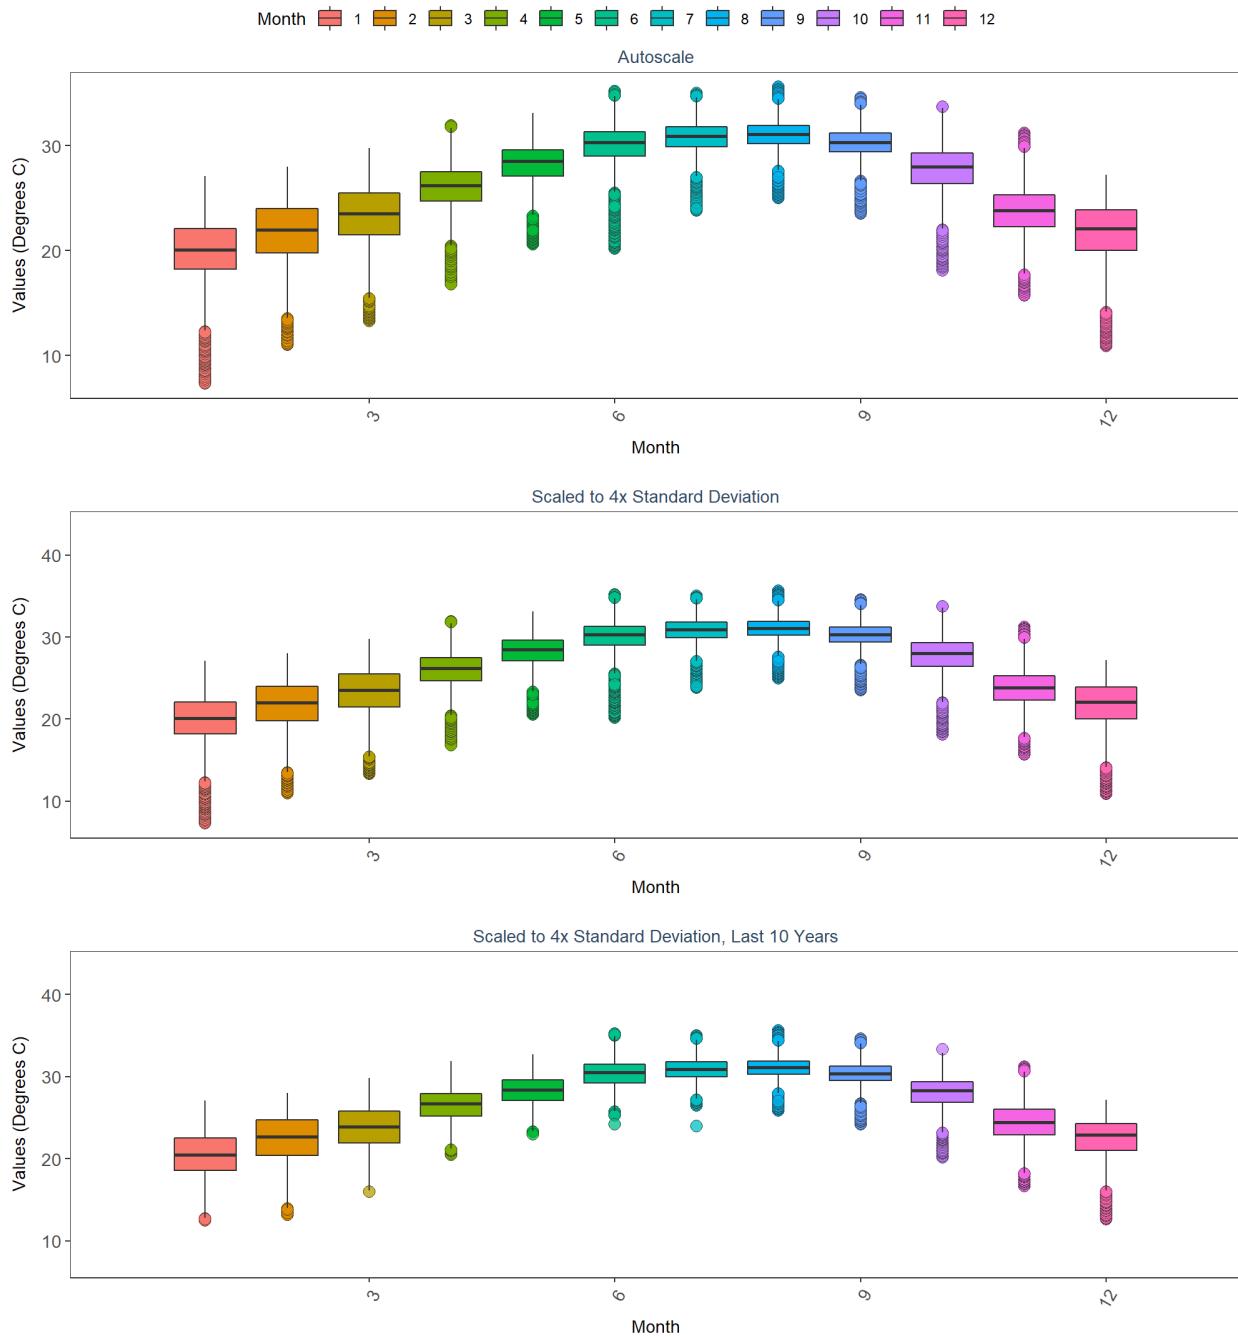


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbmbwq  
 By Year

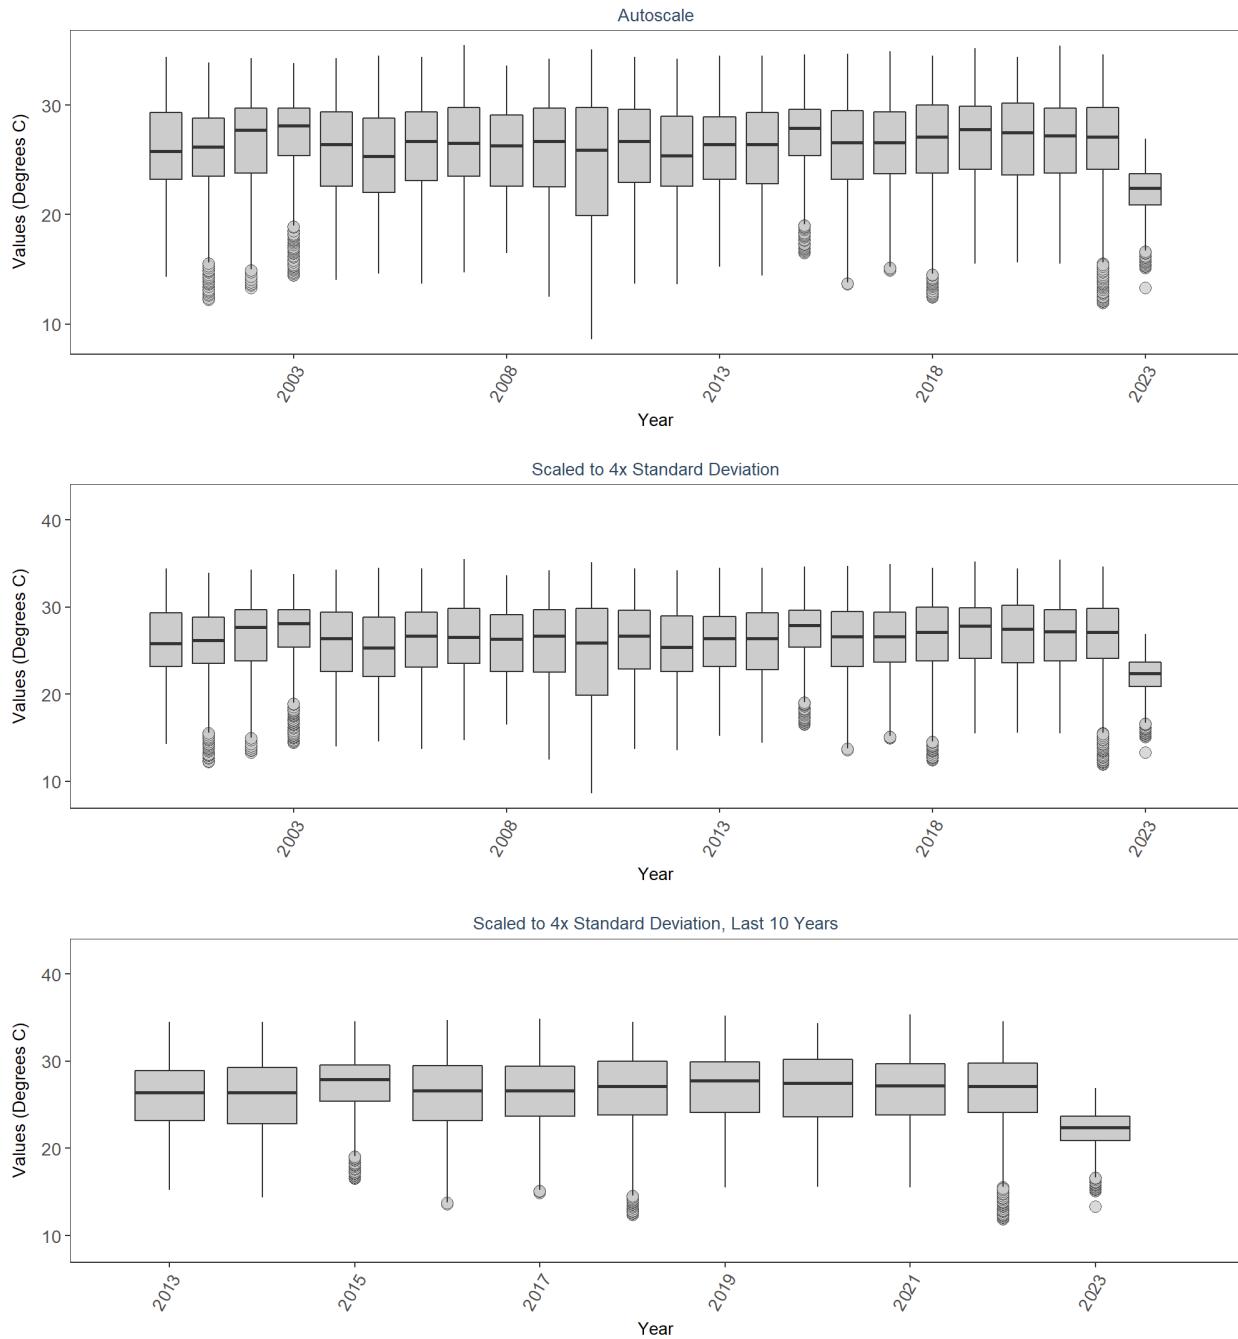


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbmbwq  
 By Year & Month

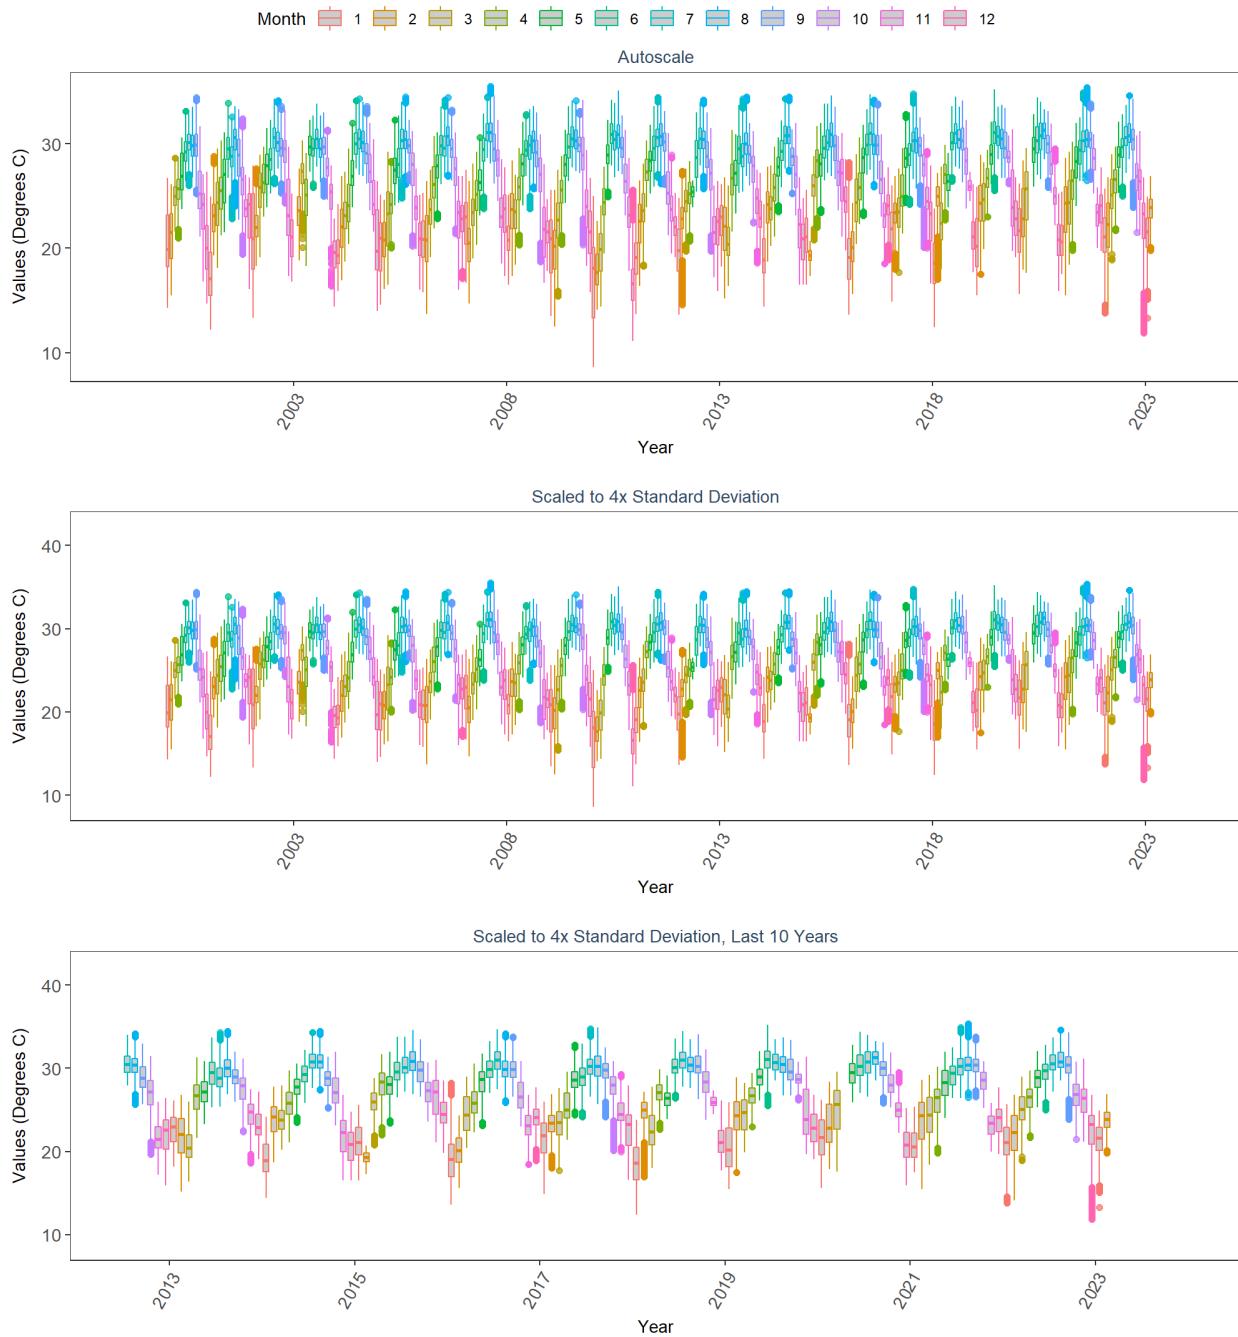

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbmbwq  
 By Month

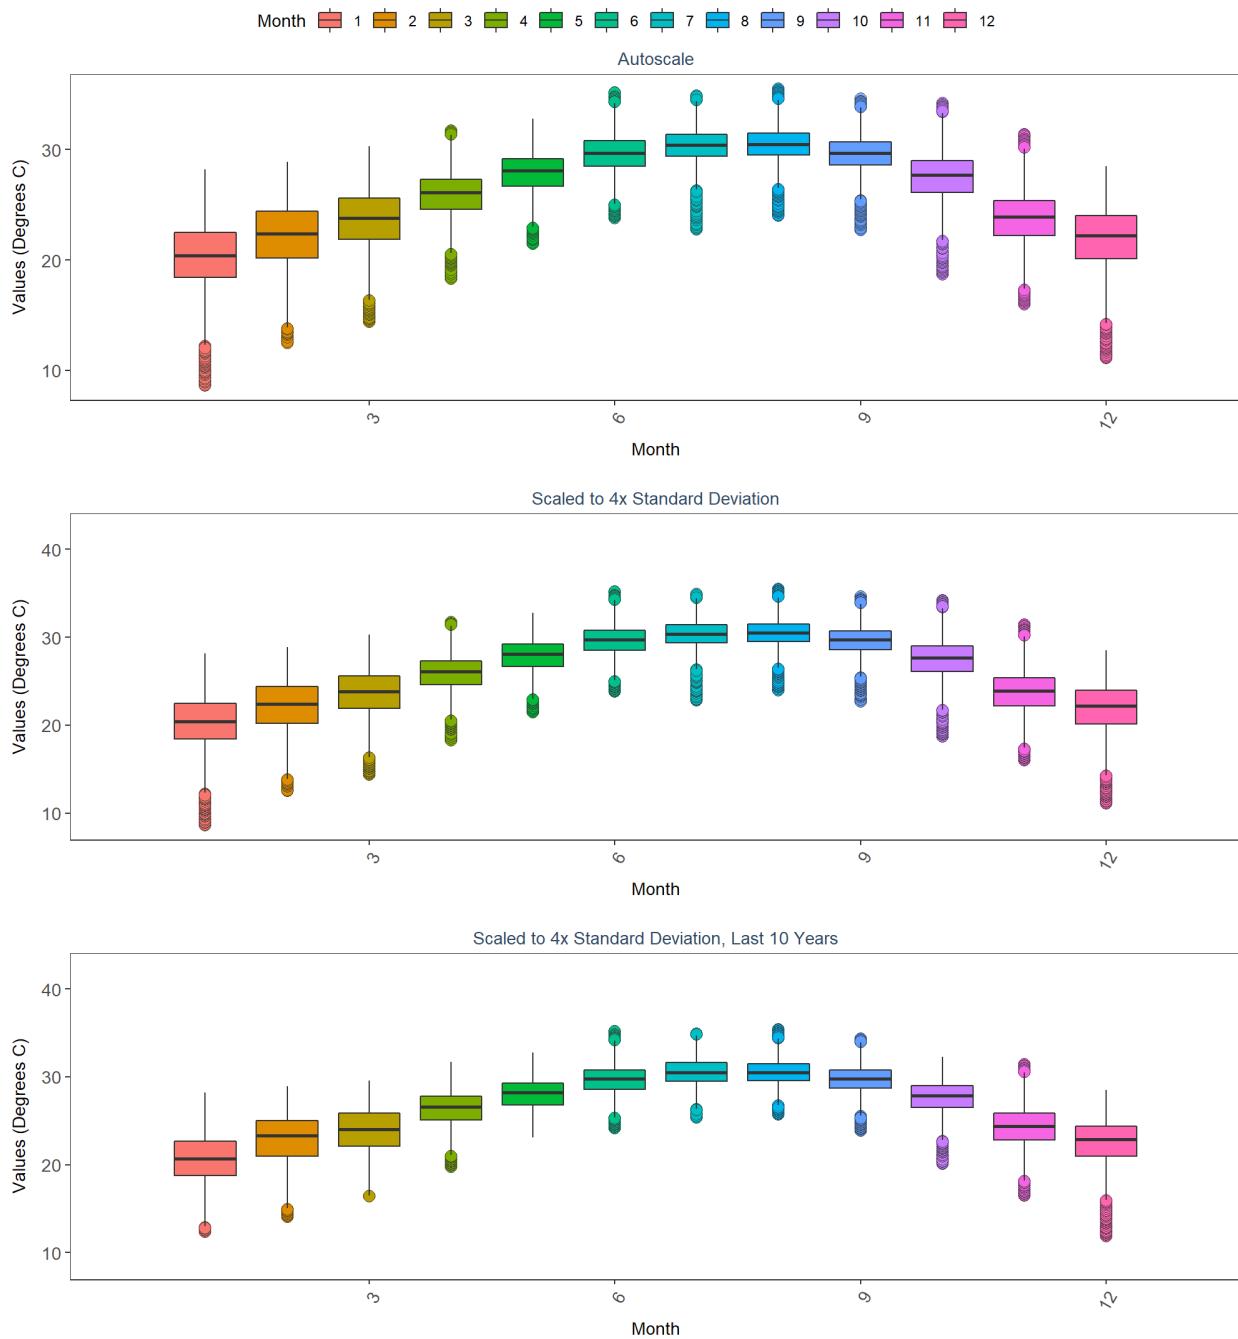


Rookery Bay National Estuarine Research Reserve  
354  
Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
rkppbwq  
By Year

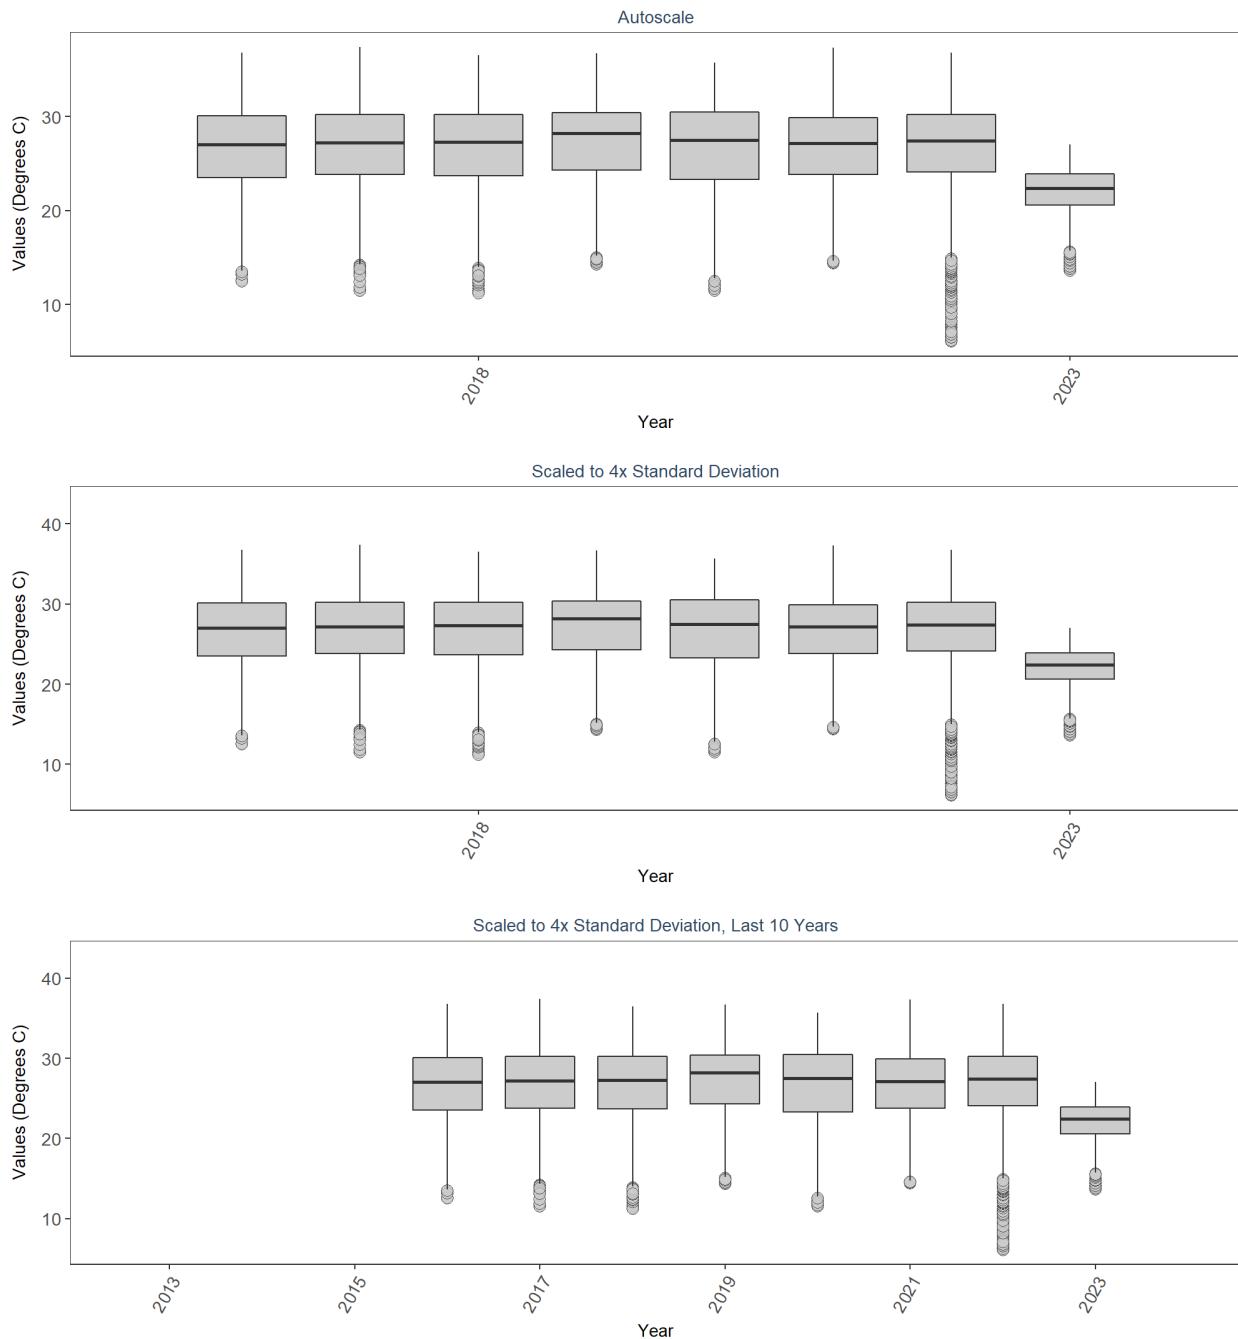


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbpbwq  
 By Year & Month

Month 1 2 3 4 5 6 7 8 9 10 11 12


Autoscale

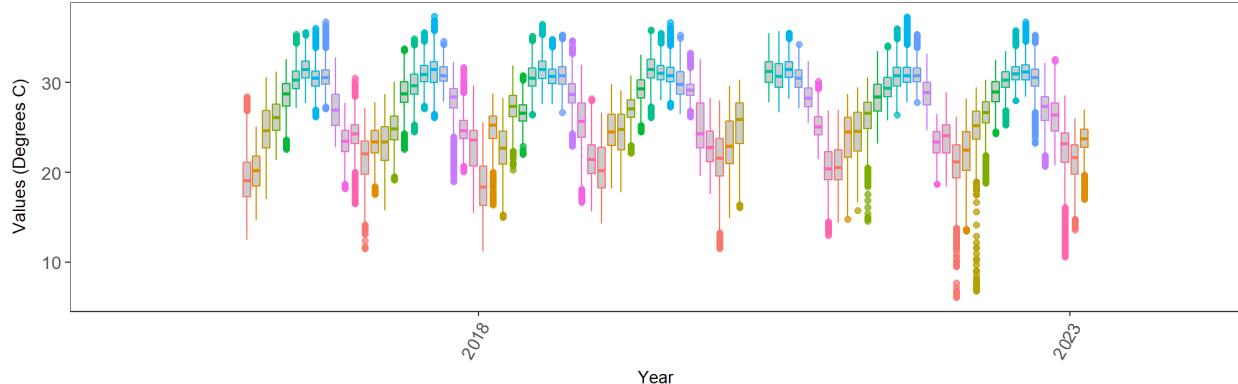


Scaled to 4x Standard Deviation

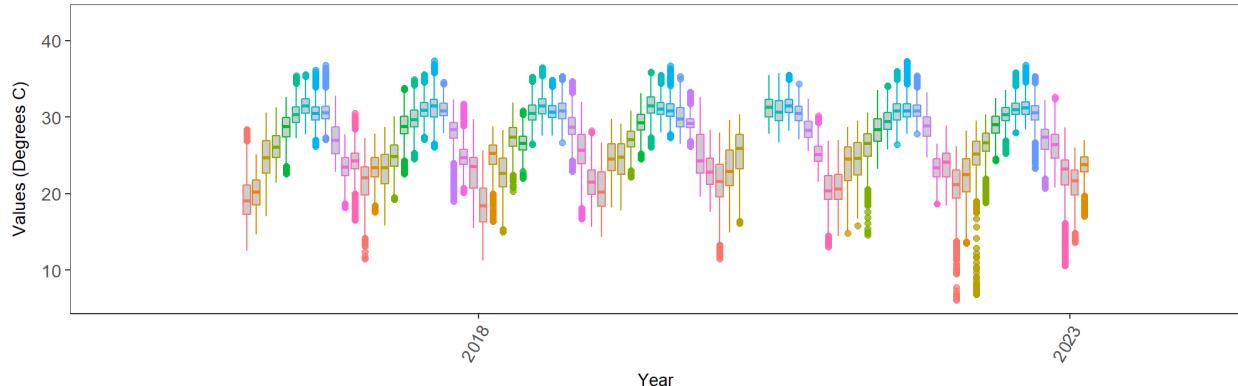


Scaled to 4x Standard Deviation, Last 10 Years

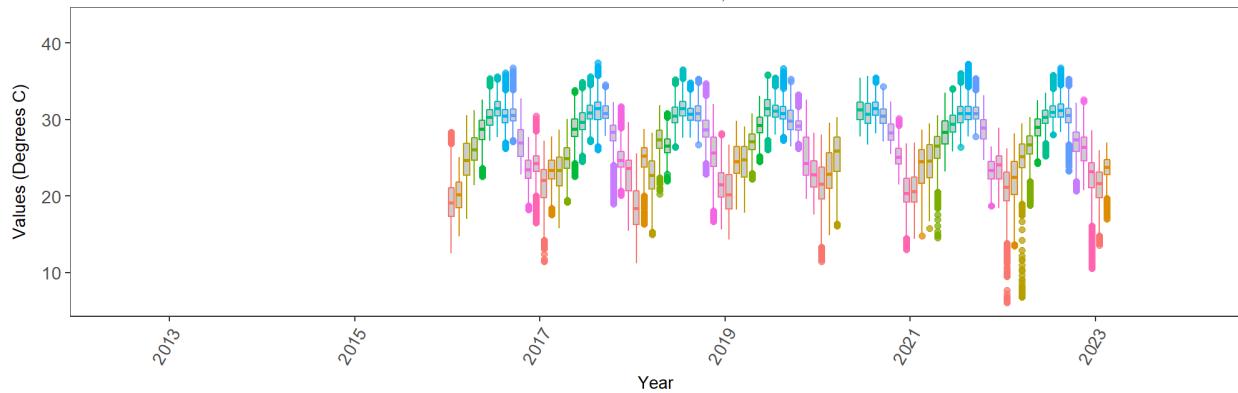


Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbpbwq  
 By Month

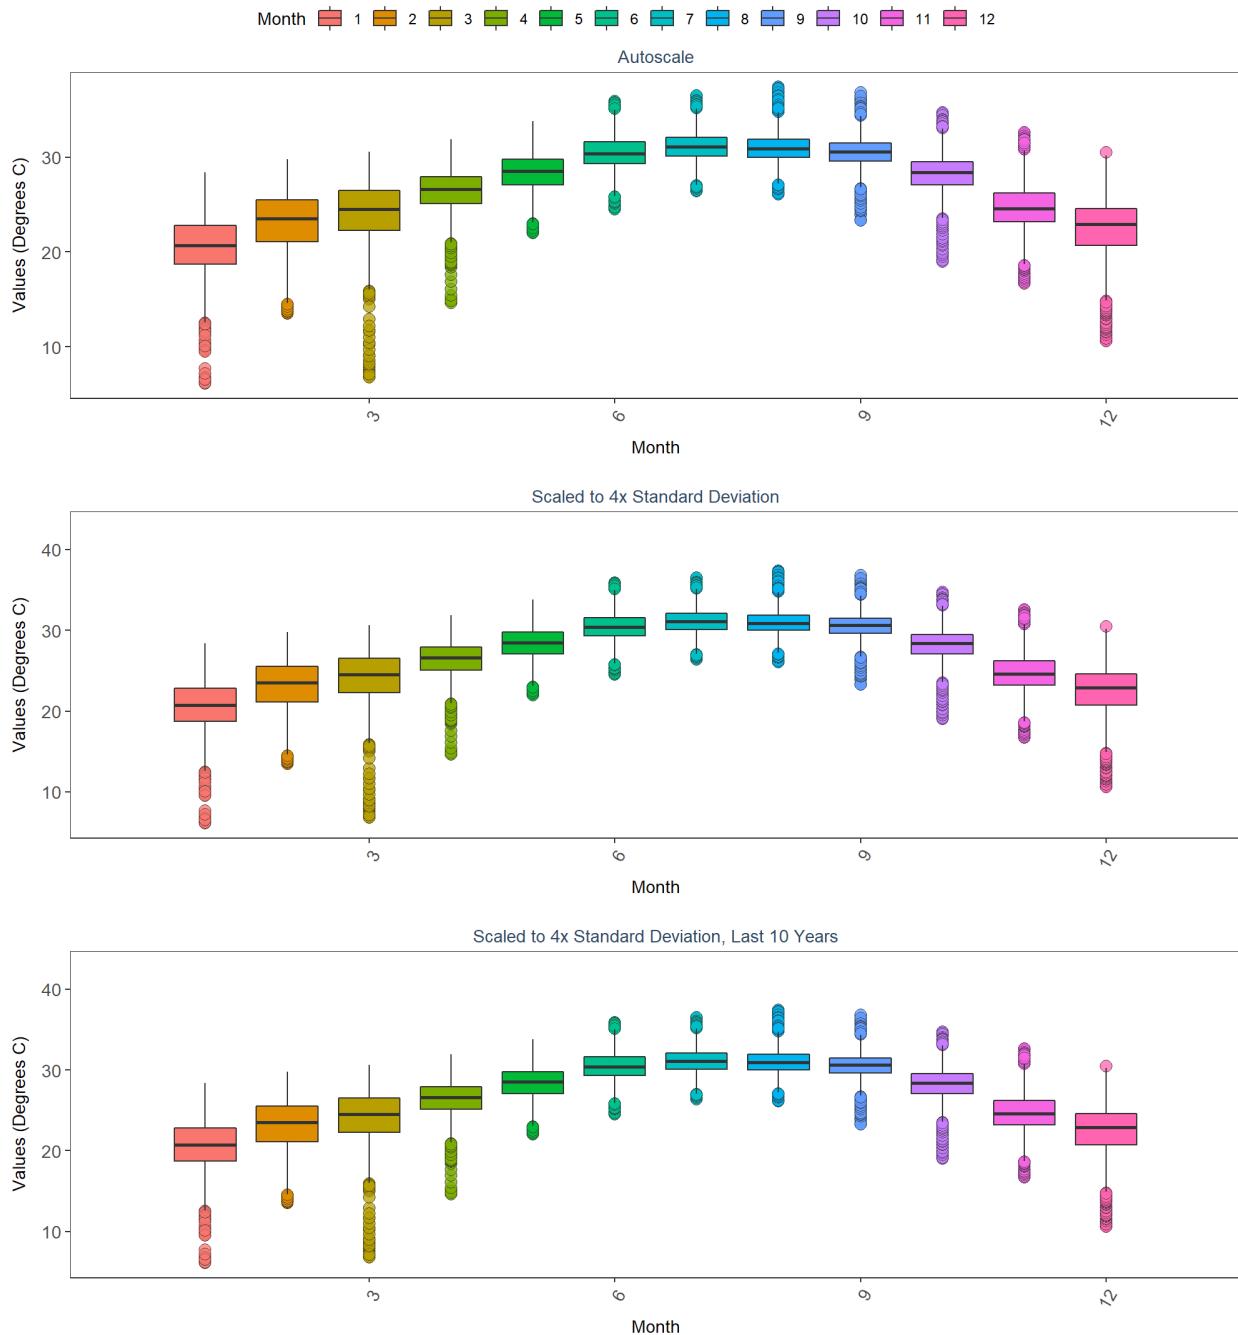


Rookery Bay National Estuarine Research Reserve  
354  
Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
rkbuhwq  
By Year

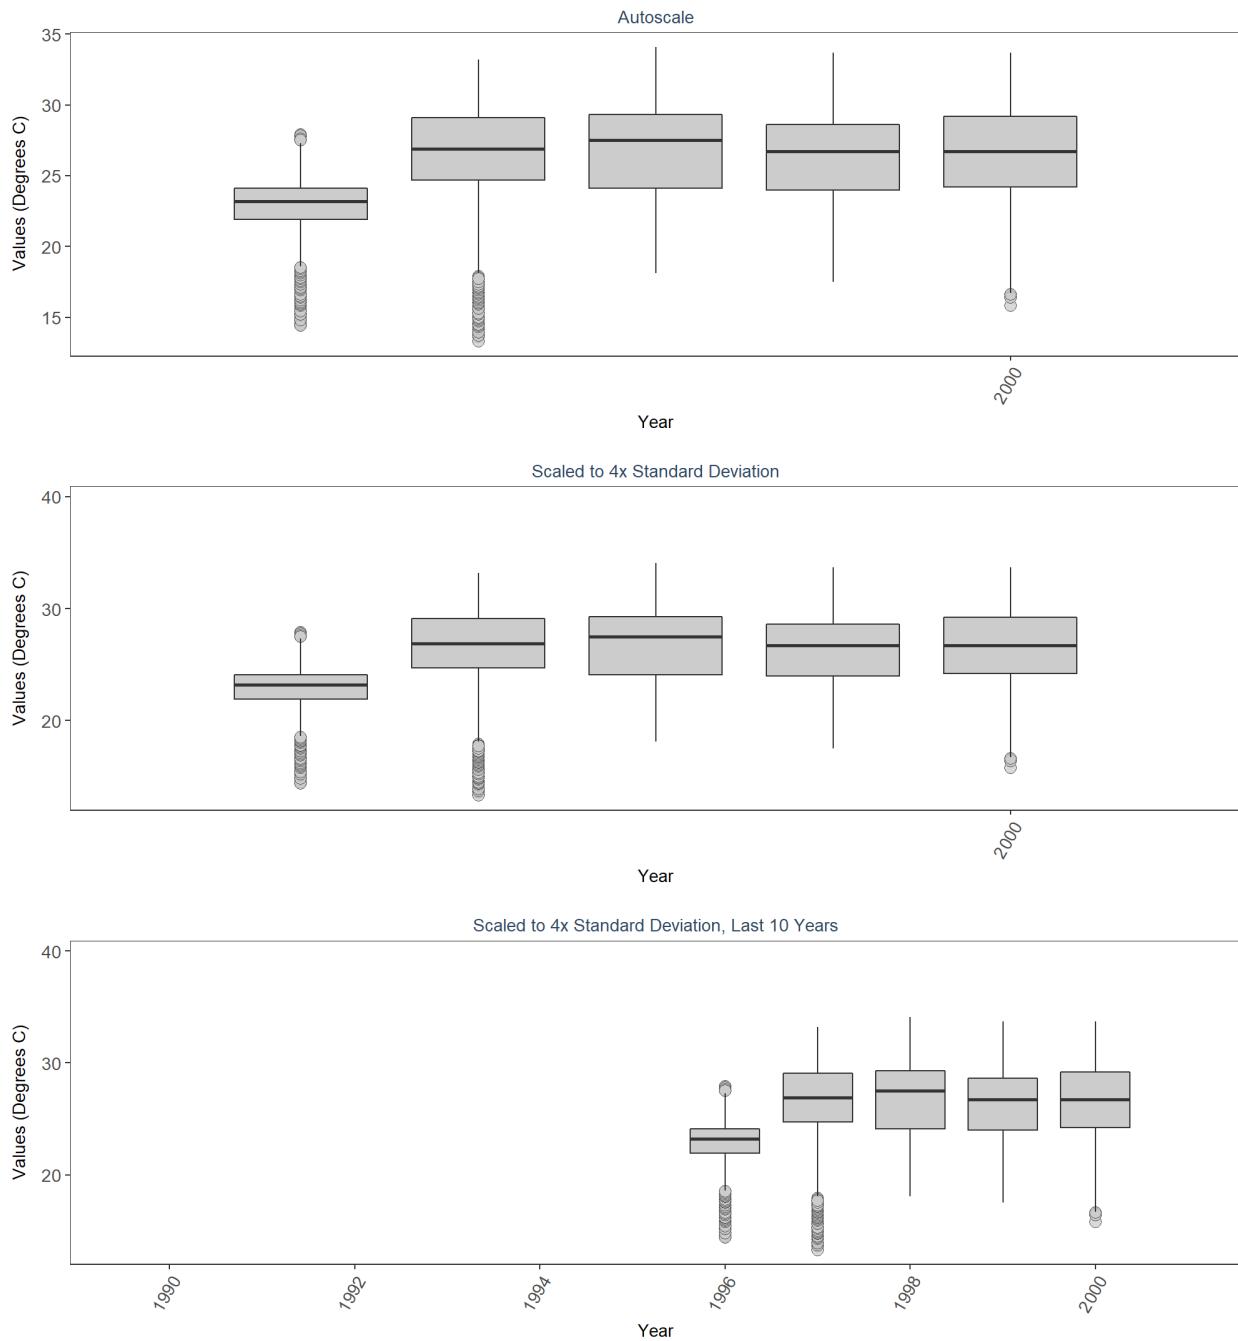

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbuuhwq  
 By Year & Month

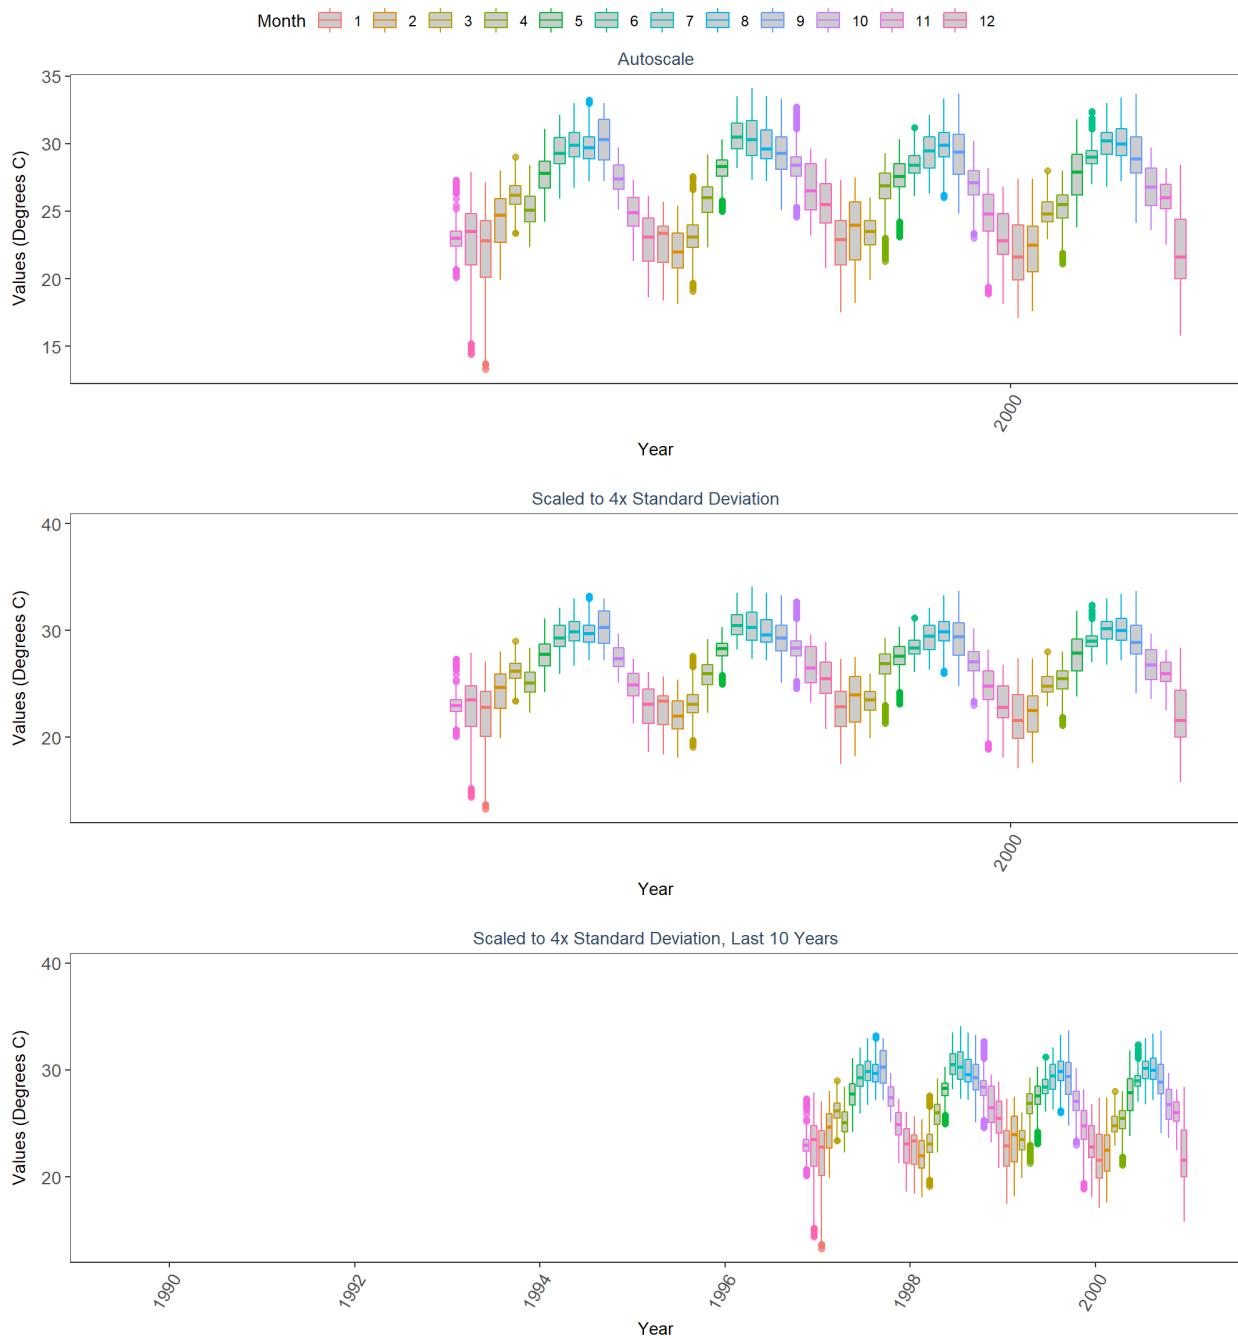

Rookery Bay National Estuarine Research Reserve  
 354  
 Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
 rkbuuhwq  
 By Month

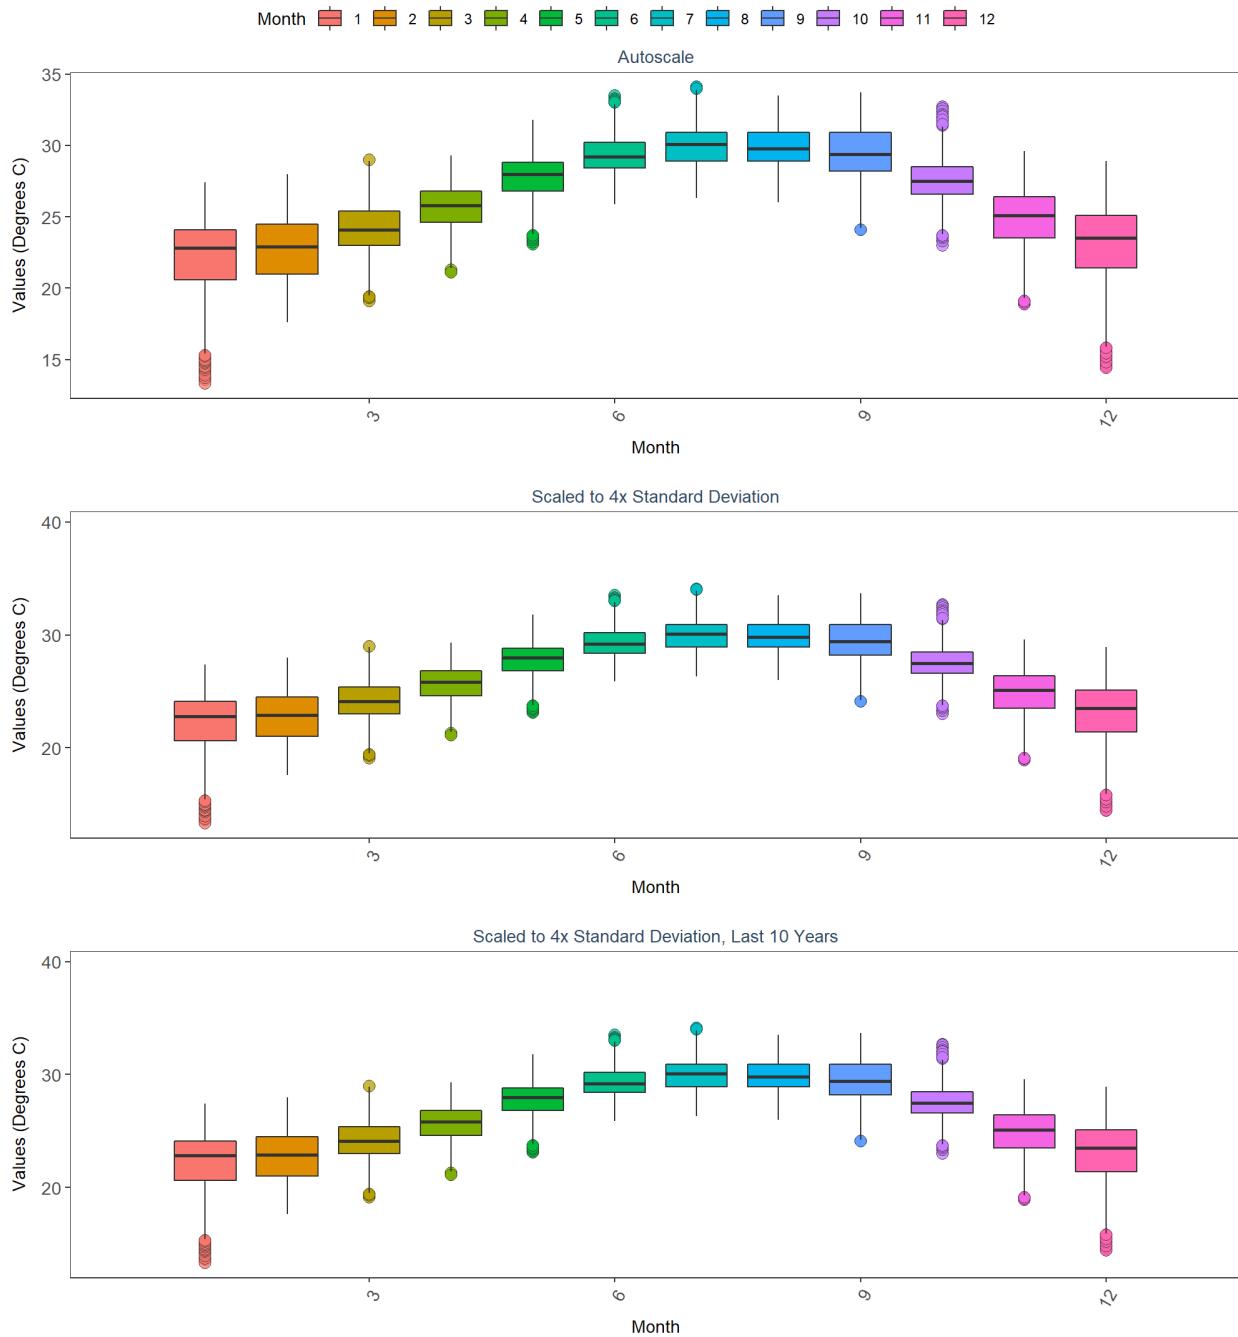

## Appendix IV: Excluded Monitoring Locations


Scatter plots of data values are created for monitoring locations that have fewer than 5 separate years of data entries.

```


# Get list of monitoring locations that have data, but without sufficient data
Mon_Exclude <- Mon_Summ[Mon_Summ$SufficientData==FALSE & N_Years>0,]
Mon_Exclude <- Mon_Exclude[order(Mon_Exclude$MonitoringID),]
z=nrow(Mon_Exclude)
# Determines whether excluded monitoring locations exist. If they do, begins
# looping through them
if(z==0){
  print("There are no monitoring locations that qualify.")
} else {
  for(i in 1:z){
    # Get managed area name for title
    MA_name <- unique(data$ManagedAreaName[
      data$MonitoringID==Mon_Exclude$MonitoringID[i]])
    # Get program name for title
    Mon_name <- paste0(unique(data$ProgramID[
      data$MonitoringID==Mon_Exclude$MonitoringID[i]]), "\n",
      unique(data$ProgramName[
        data$MonitoringID==Mon_Exclude$MonitoringID[i]]), "\n",
      unique(data$ProgramLocationID[
        data$MonitoringID==Mon_Exclude$MonitoringID[i]])))
    # Create scatter plot with data
    p1<-ggplot(data=data[data$MonitoringID==Mon_Exclude$MonitoringID[i] &
      data$Include==TRUE, ],
      aes(x=SampleDate, y=ResultValue)) +
      geom_point(shape=21, size=3, color="#333333", fill="#cccccc",
      alpha=0.75) +
      labs(title=paste0(MA_name, "\n",
        Mon_name, " (", Mon_Exclude$N_Years[i],
        " Unique Years)"),
        subtitle="Autoscale", x="Year",
        y=paste0("Values (", unit, ")")) +
      plot_theme +
      scale_x_date(labels=date_format("%m-%Y"))
    print(p1)
  }
}

```

Cape Haze Aquatic Preserve  
512  
Charlotte Harbor Aquatic Preserves Continuous Water Quality Monitoring Program  
CHWW1 (2 Unique Years)  
Autoscale

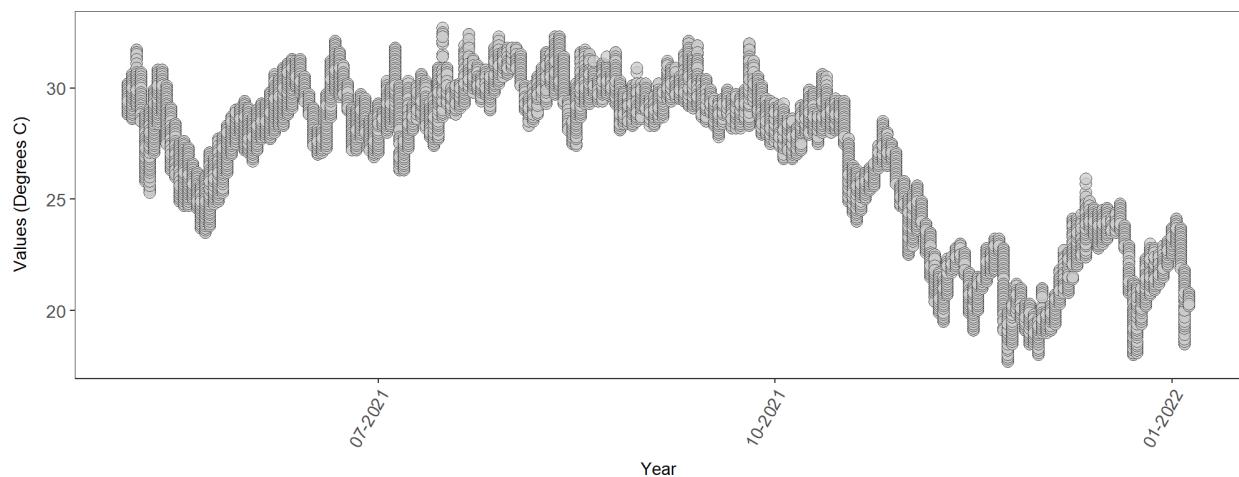

Cape Romano-Ten Thousand Islands Aquatic Preserve  
7  
National Water Information System  
255138081321701 (4 Unique Years)  
Autoscale

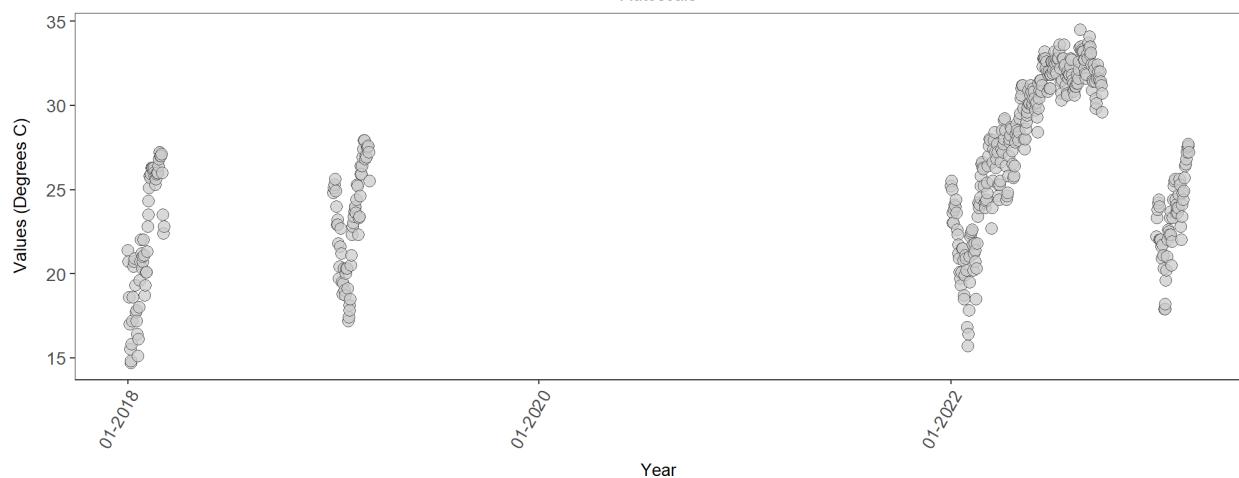


Cape Romano-Ten Thousand Islands Aquatic Preserve

7

National Water Information System

255443081314700 (3 Unique Years)

Autoscale

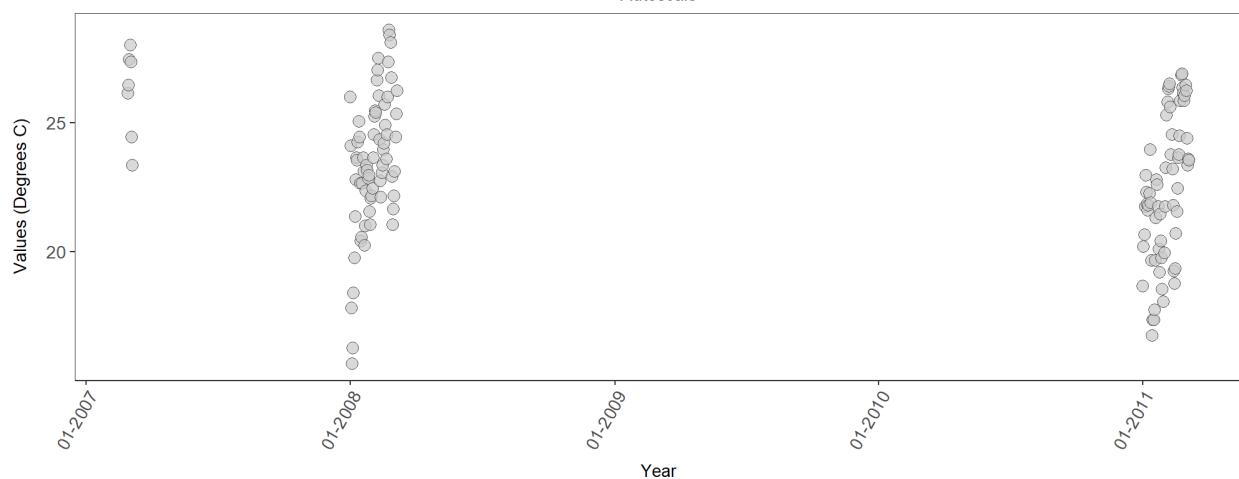


Cape Romano-Ten Thousand Islands Aquatic Preserve

7

National Water Information System

255532081314300 (2 Unique Years)

Autoscale

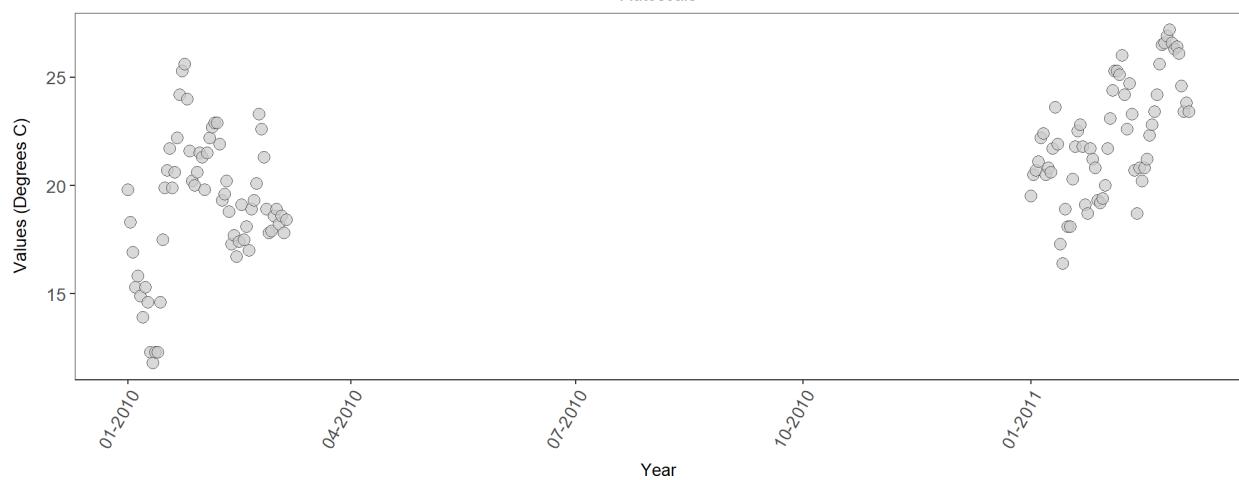


Cape Romano-Ten Thousand Islands Aquatic Preserve

7

National Water Information System  
255732081363700 (4 Unique Years)

Autoscale

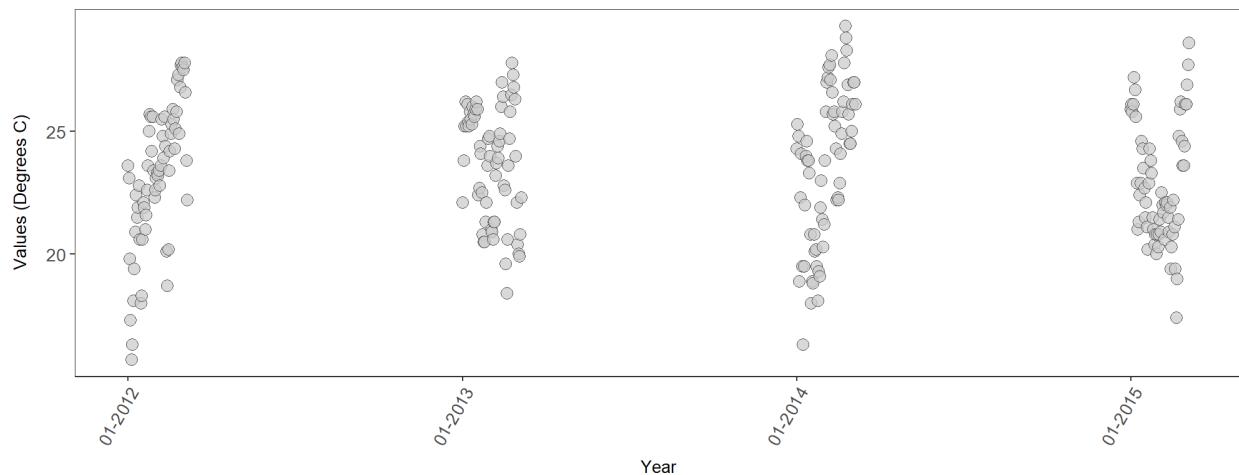


Estero Bay Aquatic Preserve

474

Estero Bay Aquatic Preserve Continuous Water Quality Monitoring  
EB04 (2 Unique Years)

Autoscale

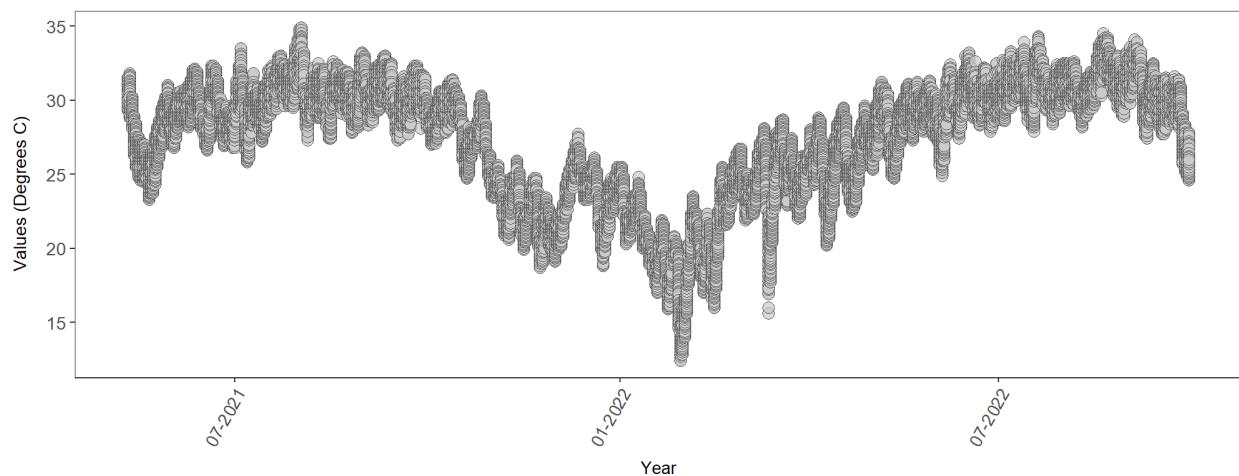


Gasparilla Sound-Charlotte Harbor Aquatic Preserve

7

National Water Information System

02293252 (3 Unique Years)

Autoscale

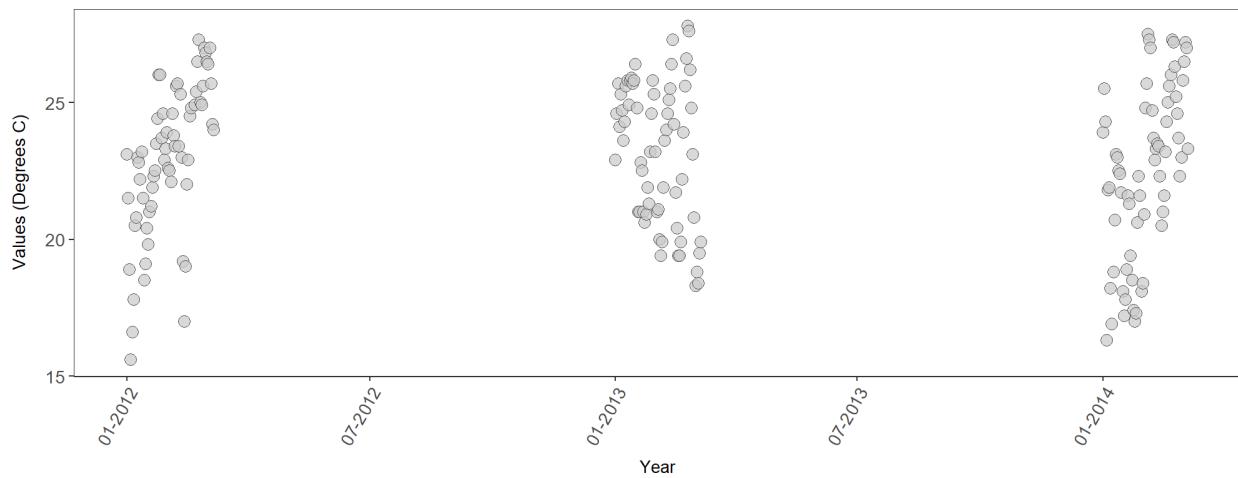


Gasparilla Sound-Charlotte Harbor Aquatic Preserve



7

National Water Information System


02293254 (3 Unique Years)

Autoscale

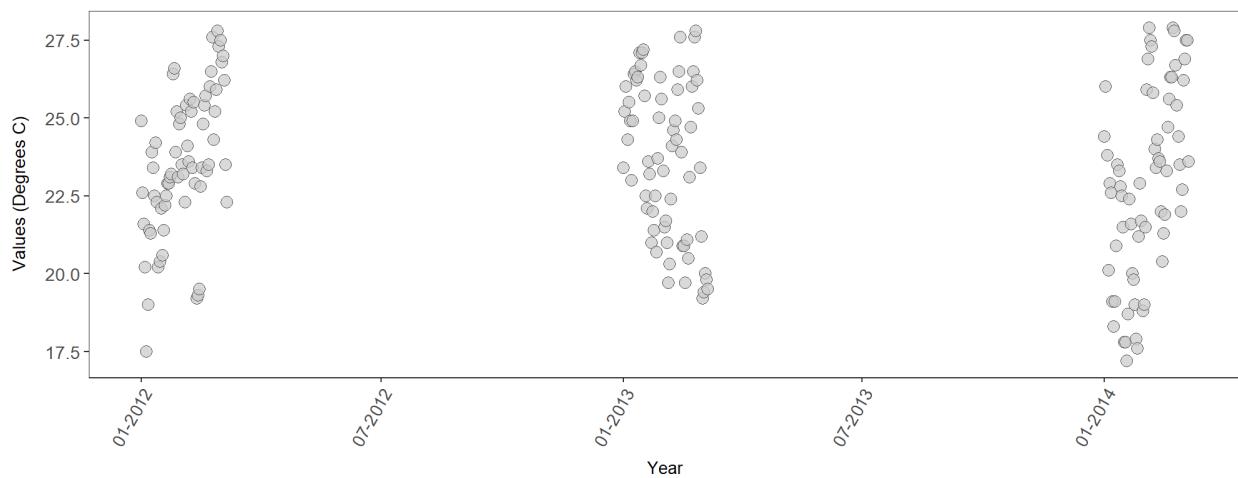


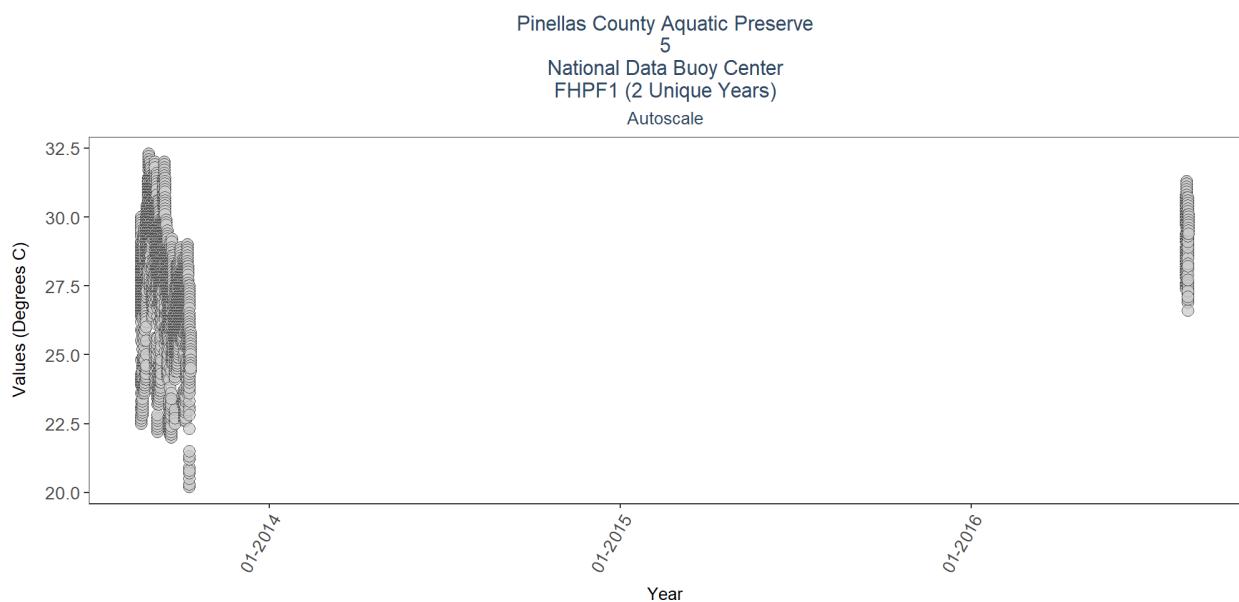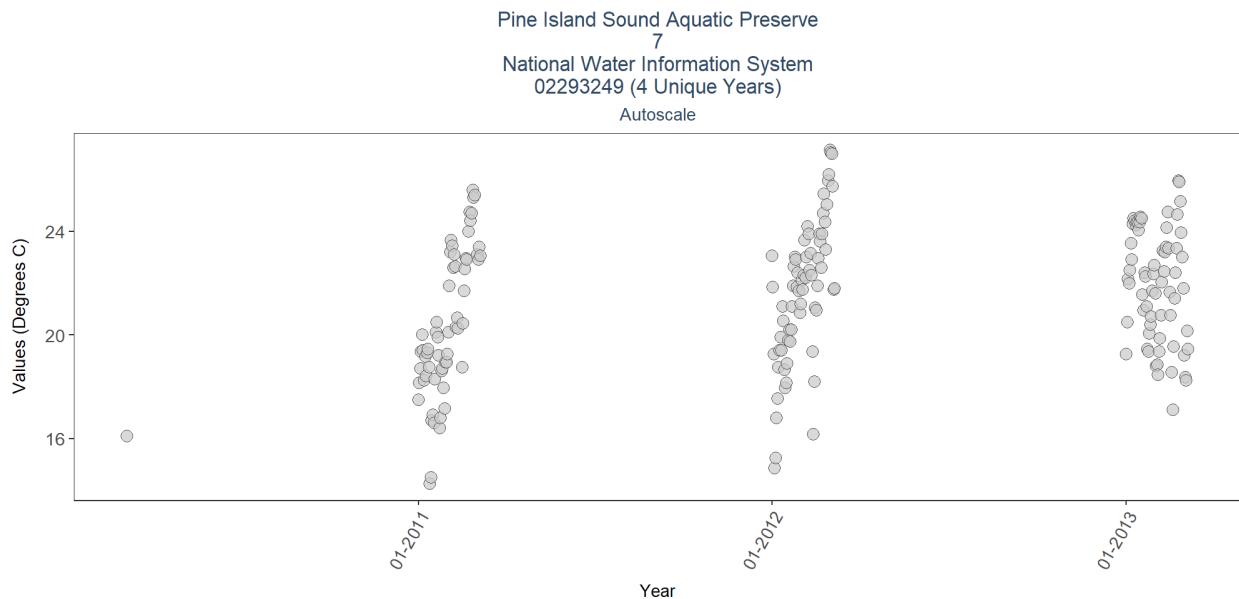


Pinellas County Aquatic Preserve  
7  
National Water Information System  
02310175 (3 Unique Years)  
Autoscale

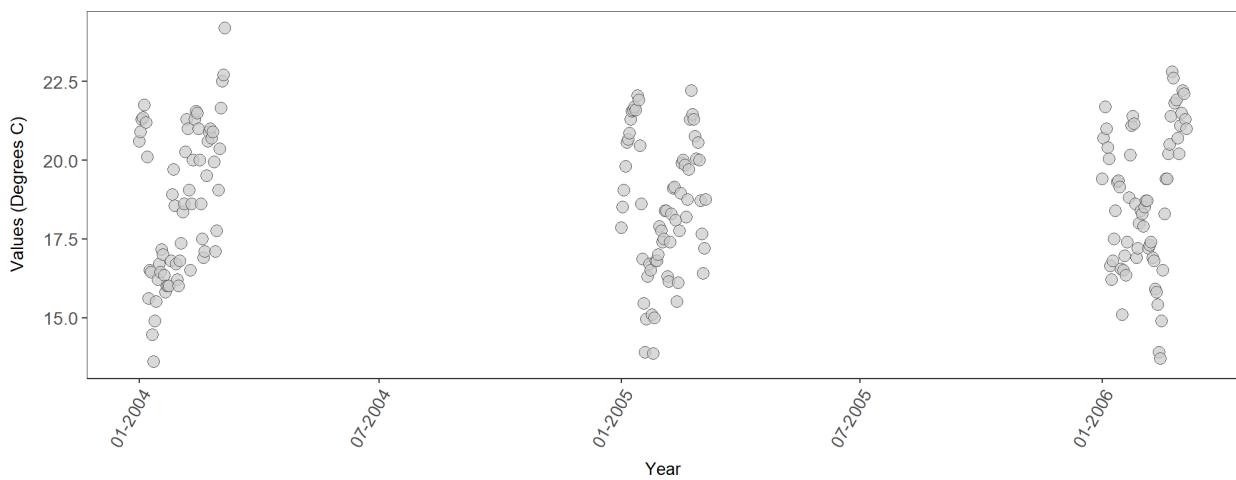


Pinellas County Aquatic Preserve  
7  
National Water Information System  
02310207 (3 Unique Years)  
Autoscale

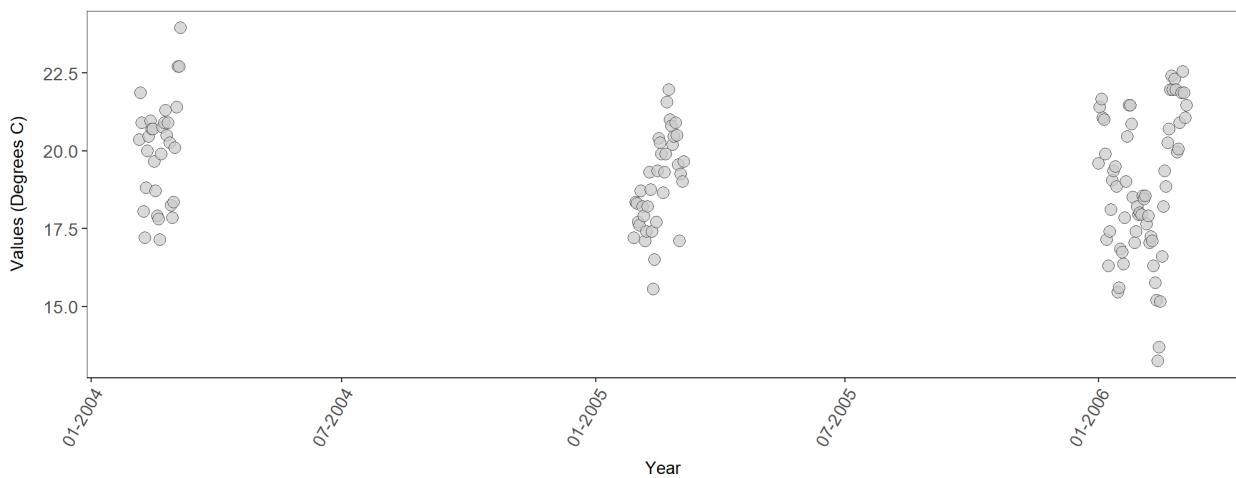

Rookery Bay Aquatic Preserve  
354  
Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
rkbbmwq (2 Unique Years)  
Autoscale

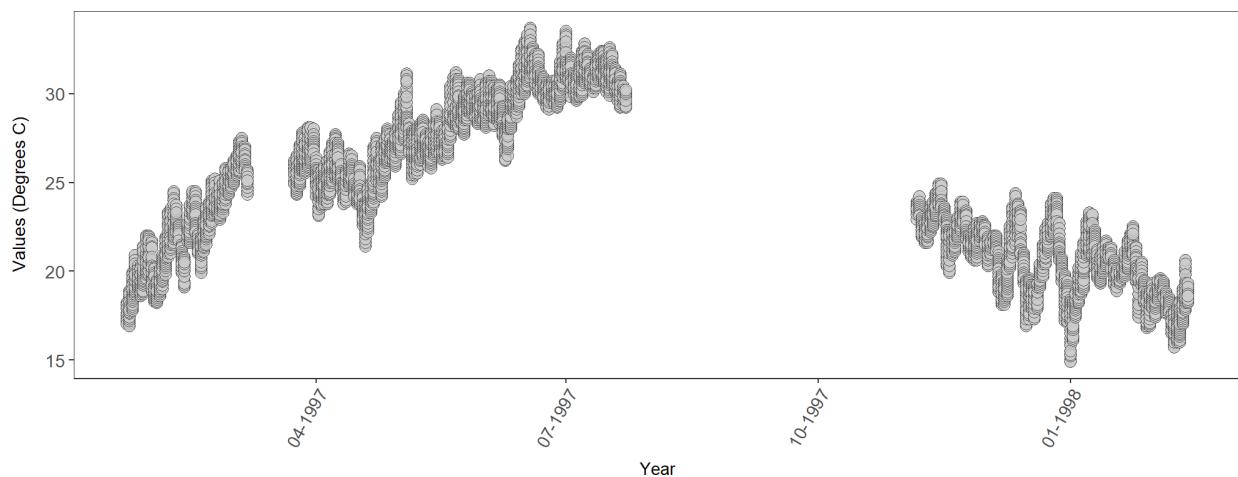

Rookery Bay National Estuarine Research Reserve  
7  
National Water Information System  
02291330 (3 Unique Years)  
Autoscale

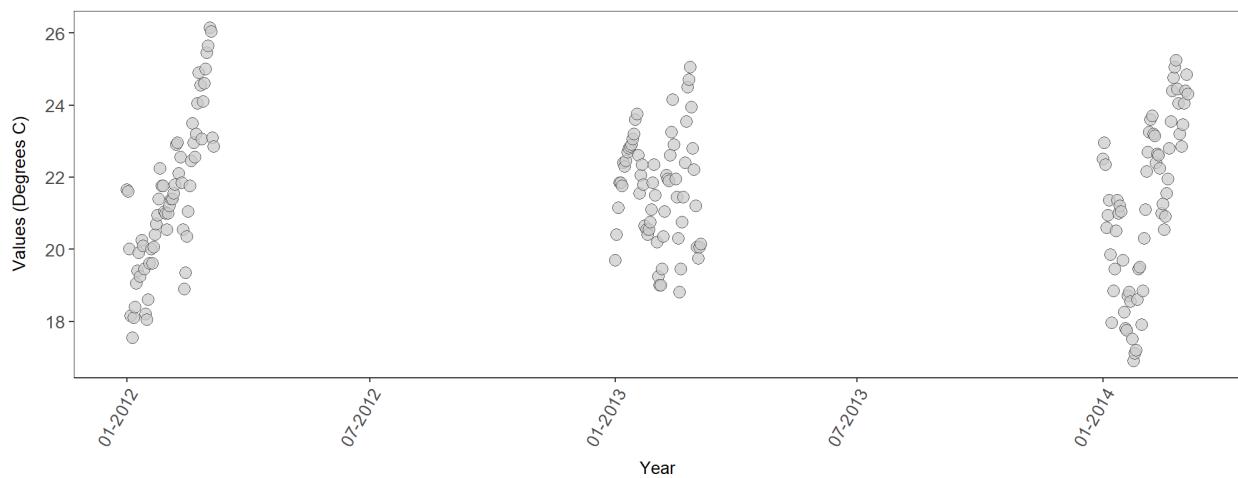


Rookery Bay National Estuarine Research Reserve

7

National Water Information System  
255138081321701 (4 Unique Years)

Autoscale

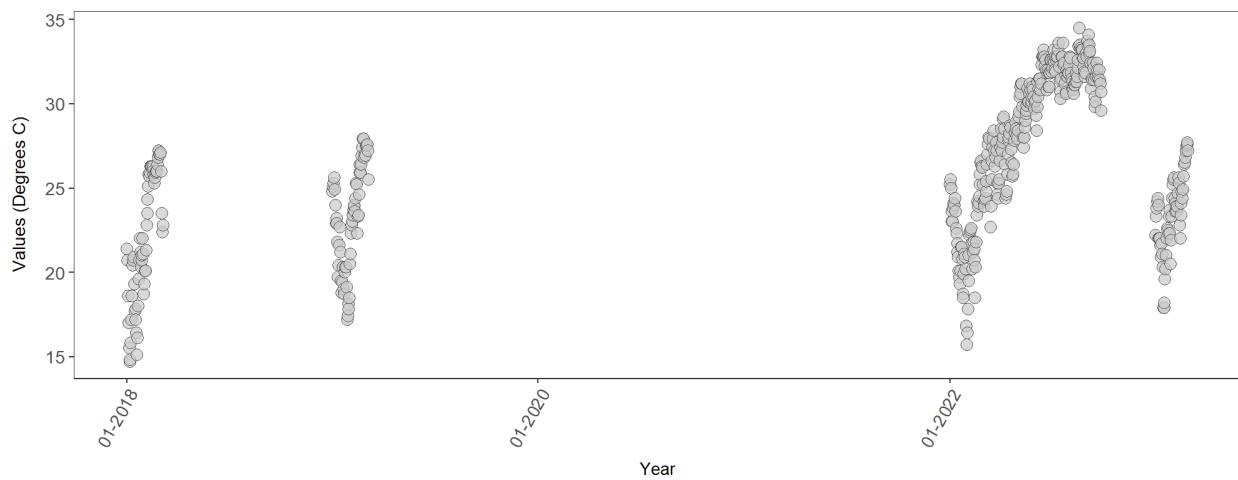


Rookery Bay National Estuarine Research Reserve

7

National Water Information System  
255443081314700 (3 Unique Years)

Autoscale

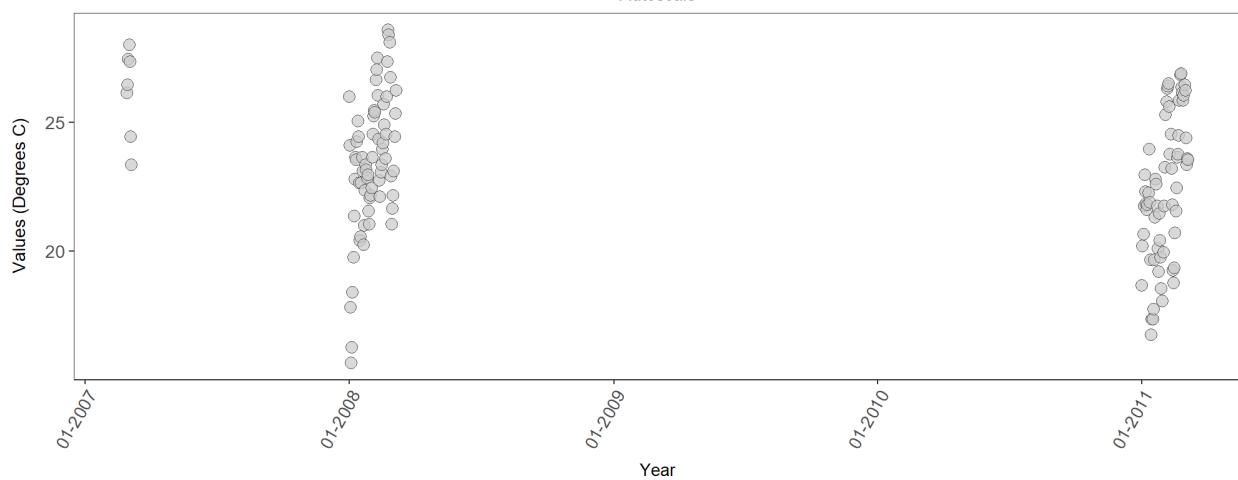


Rookery Bay National Estuarine Research Reserve

7

National Water Information System  
255532081314300 (2 Unique Years)

Autoscale

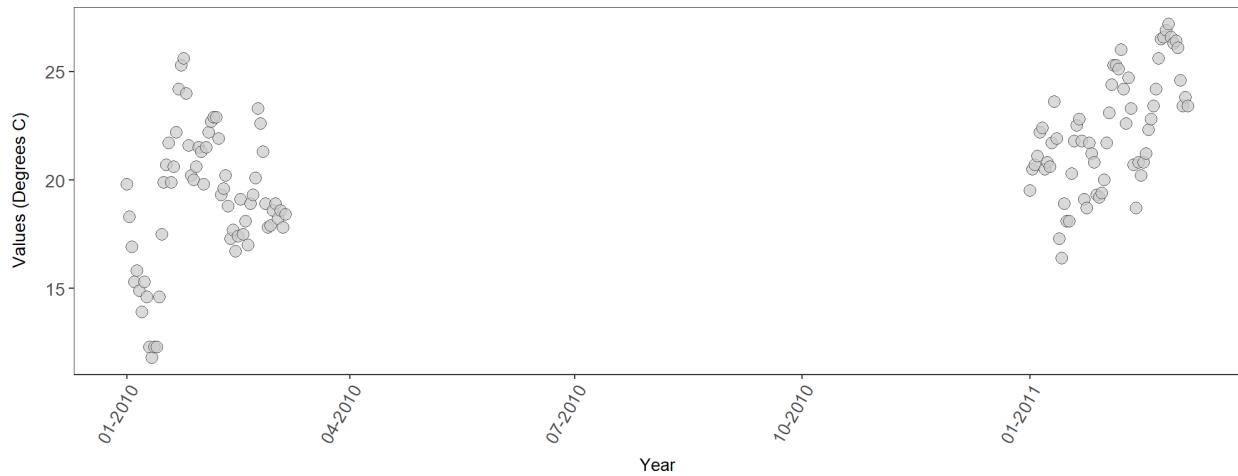


Rookery Bay National Estuarine Research Reserve


7

National Water Information System  
255732081363700 (4 Unique Years)


Autoscale

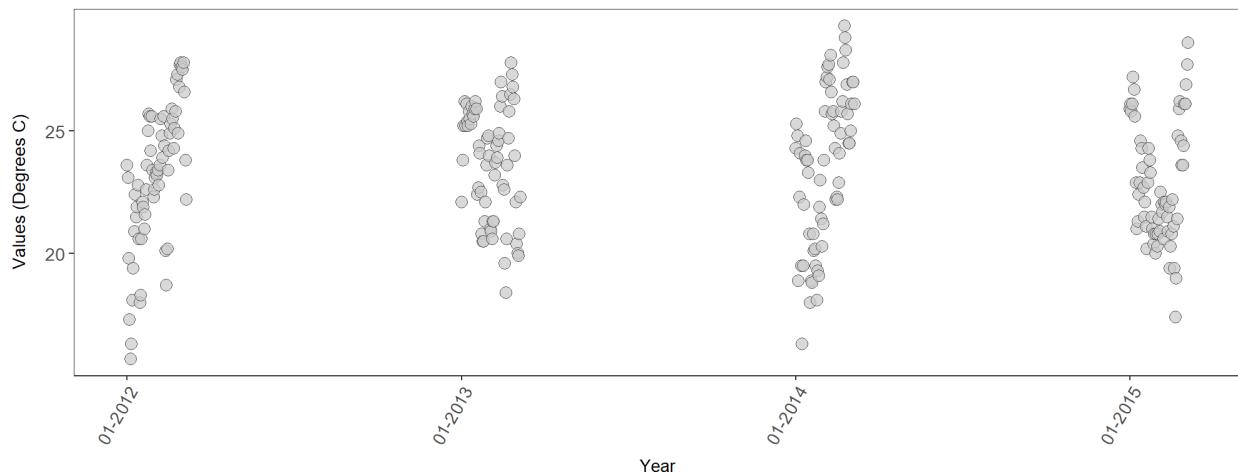


Rookery Bay National Estuarine Research Reserve  
354  
Rookery Bay National Estuarine Research Reserve System-Wide Monitoring Program  
rkbbmwq (2 Unique Years)  
Autoscale

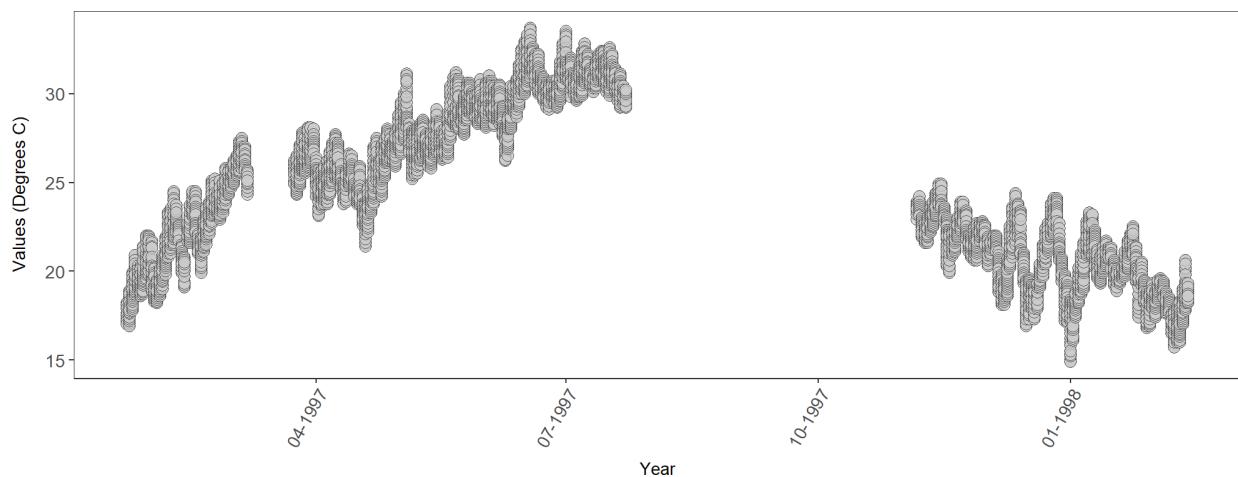

Terra Ceia Aquatic Preserve  
7  
National Water Information System  
023000825 (1 Unique Years)  
Autoscale

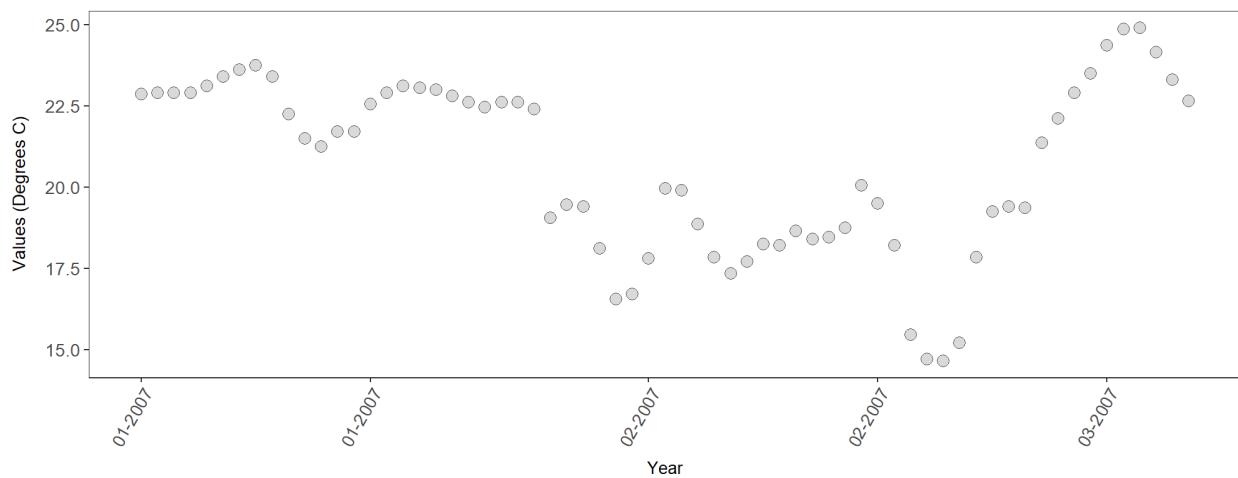

Terra Ceia Aquatic Preserve  
7  
National Water Information System  
02300084 (1 Unique Years)  
Autoscale

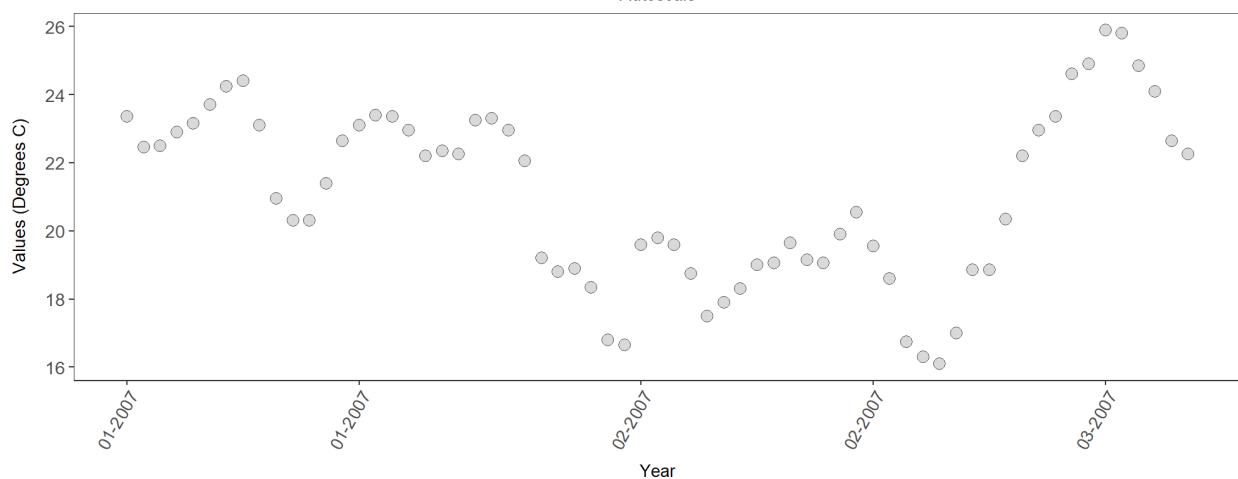

Terra Ceia Aquatic Preserve  
473  
Terra Ceia Aquatic Preserve Continuous Water Quality Monitoring  
TCBH (2 Unique Years)  
Autoscale

