Standard components

LoadingButton | UI components

Learn about the LoadingButton component for use in UI extensions.

The `LoadingButton` component renders a button with loading state options. It includes the same props as the **Button component** with a few additional props for managing loading state.

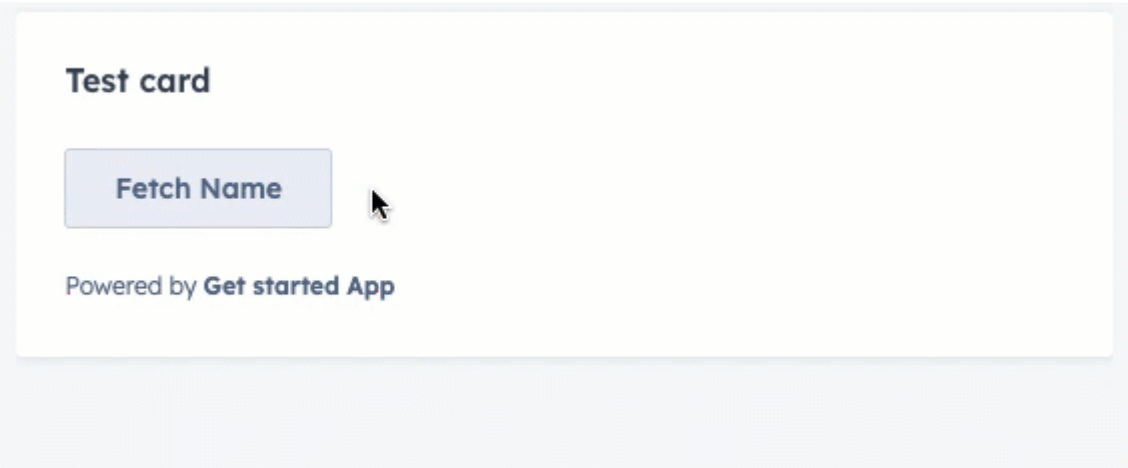

HubSpot Developers

```
hubspot.extend({ actions }) => <Extension actions={actions} />);

function fakeFetchContactName() {
  return new Promise(resolve => {
    setTimeout(() => {
      resolve({ firstname: "Tom", lastname: "Bombadil" });
    }, 1000);
  });
}

function Extension() {
  const [isFetching, setIsFetching] = useState(false);
  const [contactName, setContactName] = useState("");

  async function handleClick() {
    setIsFetching(true);
    const { firstname, lastname } = await fakeFetchContactName();

    setContactName(`${firstname} ${lastname}`);
    setIsFetching(false);
  }

  return (
    <Flex direction="column" gap="md" align="start">
      <LoadingButton loading={isFetching} onClick={handleClick}>
        Fetch Name
      </LoadingButton>
      {!isFetching && contactName !== "" && <Heading>{contactName}</Heading>}
    </Flex>
  );
}
```

Props

HubSpot Developers

›

`href`	String	Include this prop to open a URL on click. Contains the following fields: `url` (string): the URL that will open on click. `external` (boolean): set to `true` to open the URL in a new tab and display an external link icon. By default: Links to HubSpot app pages will open in the same tab and will not include an icon. Links to non-HubSpot app pages will open in a new tab and include the icon. When a button includes both `href` and an `onClick` action, both will be executed on button click.
`loading`	Boolean	Set to `true` to display the loading indicator and disable the button. Default is `false`.
`onClick`	`() => void`	A function that will be invoked when the button is clicked. It receives no arguments and its return value is ignored.
`overlay`	Object	Include a **Modal** or **Panel** component in this object to open it as an overlay on click. Learn more about **using overlays**.
`resultIconName`	String	Set to an **icon name** to display an icon after loading. By default, will display a check mark.
`size`	`'xs'`, `'extra-small'` | `'sm'`, `'small'` | `'med'`, `'medium'` (default)	The size of the button.
`type`	`'button'` (default) | `'reset'` | `'submit'`	Sets the `role` HTML attribute of the button.
`variant`	`'primary'` | `'secondary'` (default) | `'destructive'`	Sets the color of the button. See **variants section** for more information.

HubSpot Developers

overlay either on click or when the loading has finished.

HubSpot Developers

```
hubspot.extend({ actions }) => <Extension actions={actions} />);

function fakeFetchContactName() {
  return new Promise(resolve => {
    setTimeout(() => {
      resolve({ firstname: "Tom", lastname: "Bombadil" });
    }, 1000);
  });
}

function Extension() {
  const [isFetching, setIsFetching] = useState(false);
  const [contactName, setContactName] = useState("");

  async function handleClick() {
    setIsFetching(true);
    const { firstname, lastname } = await fakeFetchContactName();

    setContactName(`${firstname} ${lastname}`);
    setIsFetching(false);
  }

  return (
    <Flex direction="column" gap="md" align="start">
      <LoadingButton
        loading={isFetching}
        onClick={handleClick}
        overlayOptions={{ openBehavior: "onLoadingFinish" }}
        overlay={
          <Panel title={"Contact name "} id="my-panel">
            <PanelBody>
              <PanelSection>{contactName !== "" && <Heading>{contactName}</Heac
            </PanelBody>
          </Panel>
        }
      >
        Fetch name (overlay)
      </LoadingButton>
    </Flex>
```

Variants

Using the `variant` prop, you can set the color of the button.

Primary: a dark blue button for the most frequently used or most important action on an extension. Each extension should only have one primary button.

Primary

Secondary (default): a grey button to provide alternative or non-primary actions. Each extension should include no more than two secondary buttons.

Secondary

Destructive: a red button for actions that delete, disconnect, or perform any action that the user can't undo. Button text should clearly communicate what is being deleted or disconnected. After a destructive button is clicked, the user should have to verify or confirm the action.

Destructive

Please note:

HubSpot does not provide variant options for the orange buttons you'll find across the app (both solid and outlined). Those color variants are reserved for the HubSpot product, which helps to maintain the hierarchy of available actions on a given page.

Usage examples

Use a `'primary'` button at the end of a form to submit data to another system.

Use a `'secondary'` button next to a primary form submit button to reset form fields.

HubSpot Developers

›

Guidelines

DO: set button text that clearly communicates what action will occur when a user clicks it. Text should be unambiguous and concise (~2-4 words).

DO: use sentence-casing for button text (only the first word capitalized)

DO: minimize the number of buttons that appear on a page record across all extensions.

DO: always open links to pages outside of the HubSpot app in a new tab (`external: true`).

DON'T: include multiple primary buttons in a single extension.

DON'T: use a destructive button unless the consequences are significant or irreversible.

Related components

ButtonRow

Button

CrmActionButton

Panel

Last modified on January 28, 2026

Was this page helpful? Yes No

HubSpot Developers

Next

HubSpot Developers

Copyright © 2026 HubSpot, Inc

Privacy Policy

Security

Website Accessibility

Manage Cookies