HubSpot Developers

Standard components › Modal

Standard components

Modal

Learn about the Modal component for use in UI extensions.

Use the `Modal` component to render a pop-up overlay containing other components. Like the `Panel` component, you'll include the `Modal` component in an `overlay` prop within a **Button**, **LoadingButton**, **Link**, **Tag**, or **Image** component.

To see an example of using overlays, check out **HubSpot's Overlay example project**. Note that this is a version `2025.1` project, but the overlay implementation would be similar for `2025.2`.

To format the modal, you'll use the following subcomponents:

- `ModalBody` (required): contains the main content of the modal.
- `ModalFooter`: an optional component to format the footer section of the modal.

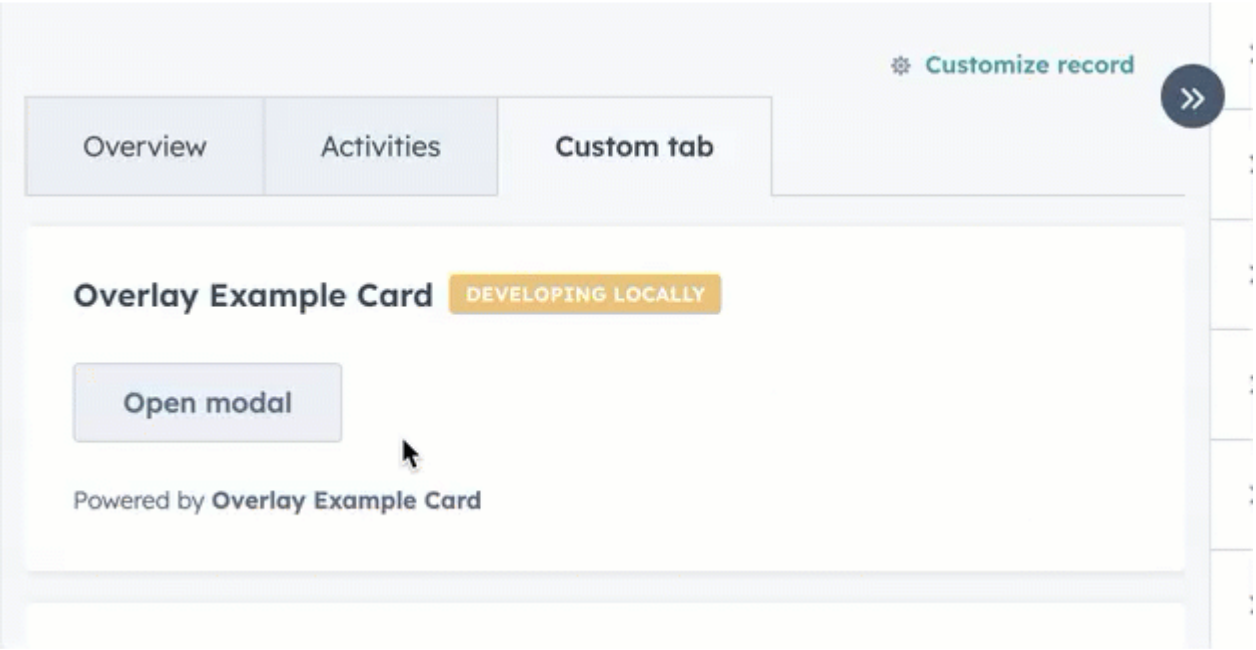

HubSpot Developers

›

```
const Extension = () => {
  return (
    <>
      <Button
        overlay={
          <Modal id="default-modal" title="Example modal" width="md">
            <ModalBody>
              <Text>Welcome to my modal. Thanks for stopping by!</Text>
              <Text>Close the modal by clicking the X in the top right.</Text>
            </ModalBody>
          </Modal>
        }
      >
        Open modal
      </Button>
    </>
  );
};
```

Props

Prop	Type	Description
`aria-label`	String	The modal's accessibility label.
`id`	String	The unique identifier for the modal.
`onClose`	`() => void`	A function that will be invoked when the modal has finished closing.
`onOpen`	`() => void`	A function that will be invoked when the modal has finished opening.
`title`	String	The title of the modal, displayed at in the modal's top bar.
`variant`	`'default'` (default) | `'danger'`	The type of modal. See the for more information.

HubSpot Developers

›

Opening and closing modals

By default, HubSpot handles opening the modal when the user clicks the parent **Button**, **LoadingButton**, **Link**, **Tag**, or **Image** component. A close button will also be included in the top right of the modal.

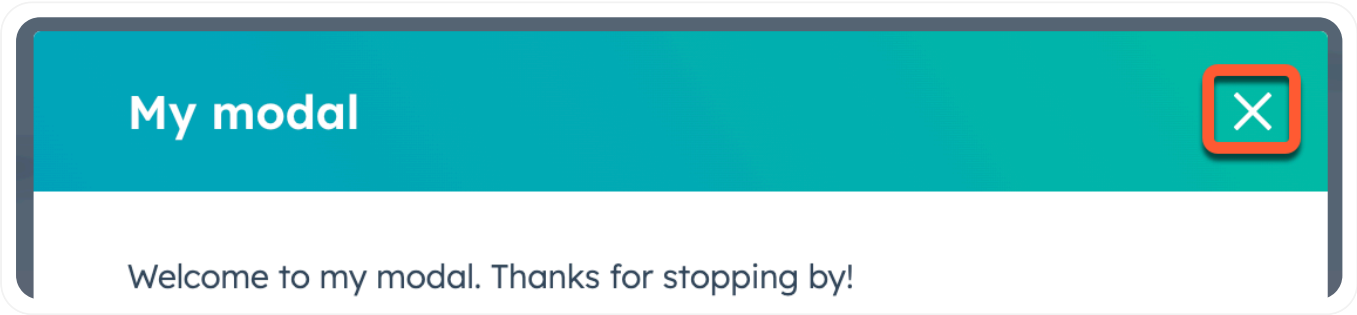

In addition, you can add a close mechanism to a modal using a `Button`, `LoadingButton`, `Link`, `Tag` or `Image` with an `onClick` event that triggers the `closeOverlay` action. To use this action, you'll need to include the **actions argument** in `hubspot.extend()` as seen in the example code below.

Learn more about **opening and closing overlays**.

HubSpot Developers

```
const OverlayExampleCard = ({ actions }) => {
  return (
    <>
      <Button
        overlay={
          <Modal id="default-modal" title="Example modal" width="md">
            <ModalBody>
              <Text>Welcome to my modal. Thanks for stopping by!</Text>
              <Text>Close the modal by clicking the X in the top right, or usir
            </ModalBody>
            <ModalFooter>
              <Button onClick={() => actions.closeOverlay("default-modal")}>Clc
            </ModalFooter>
          </Modal>
        }
      >
        Open modal
      </Button>
    </>
  );
};
```

Please note:

You can only have one modal open at a time. Opening a modal while another is already open will cause the first one to close.

A `Modal` can be opened from a `Panel`, but a `Panel` cannot be opened from a `Modal`.

Variants

Use the `variant` prop to configure the style of modal.

By default, the modal will include a blue colored top bar where the `title` displays.

HubSpot Developers

›

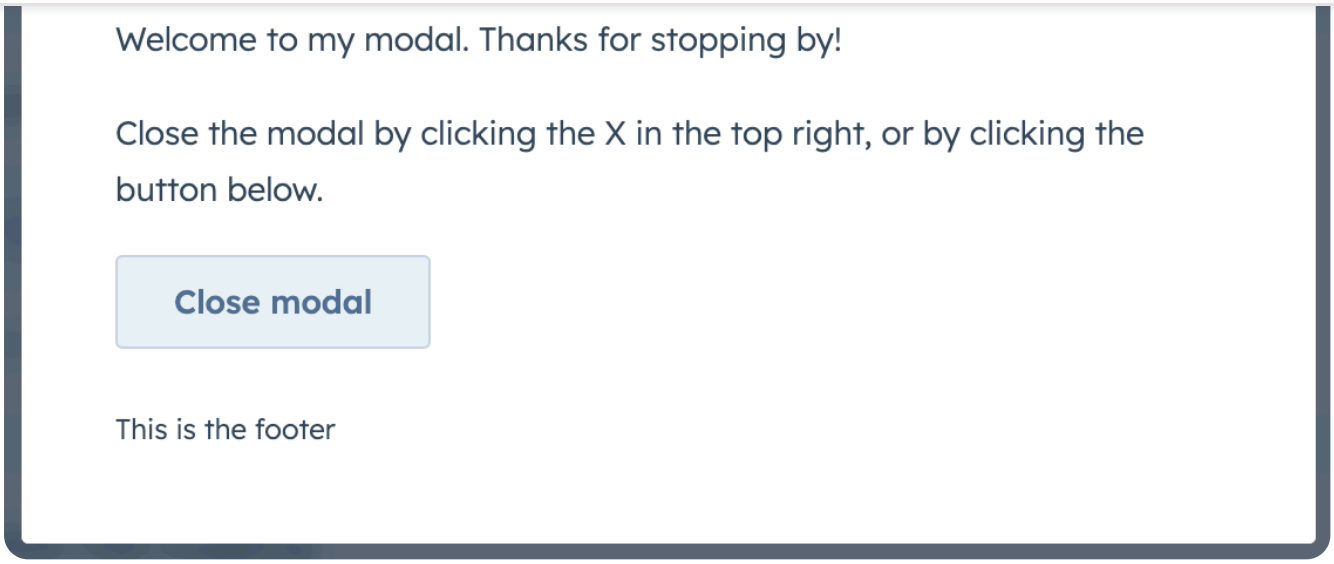

To configure the modal as a warning with a red colored top bar, set `variant` to `'danger'` .

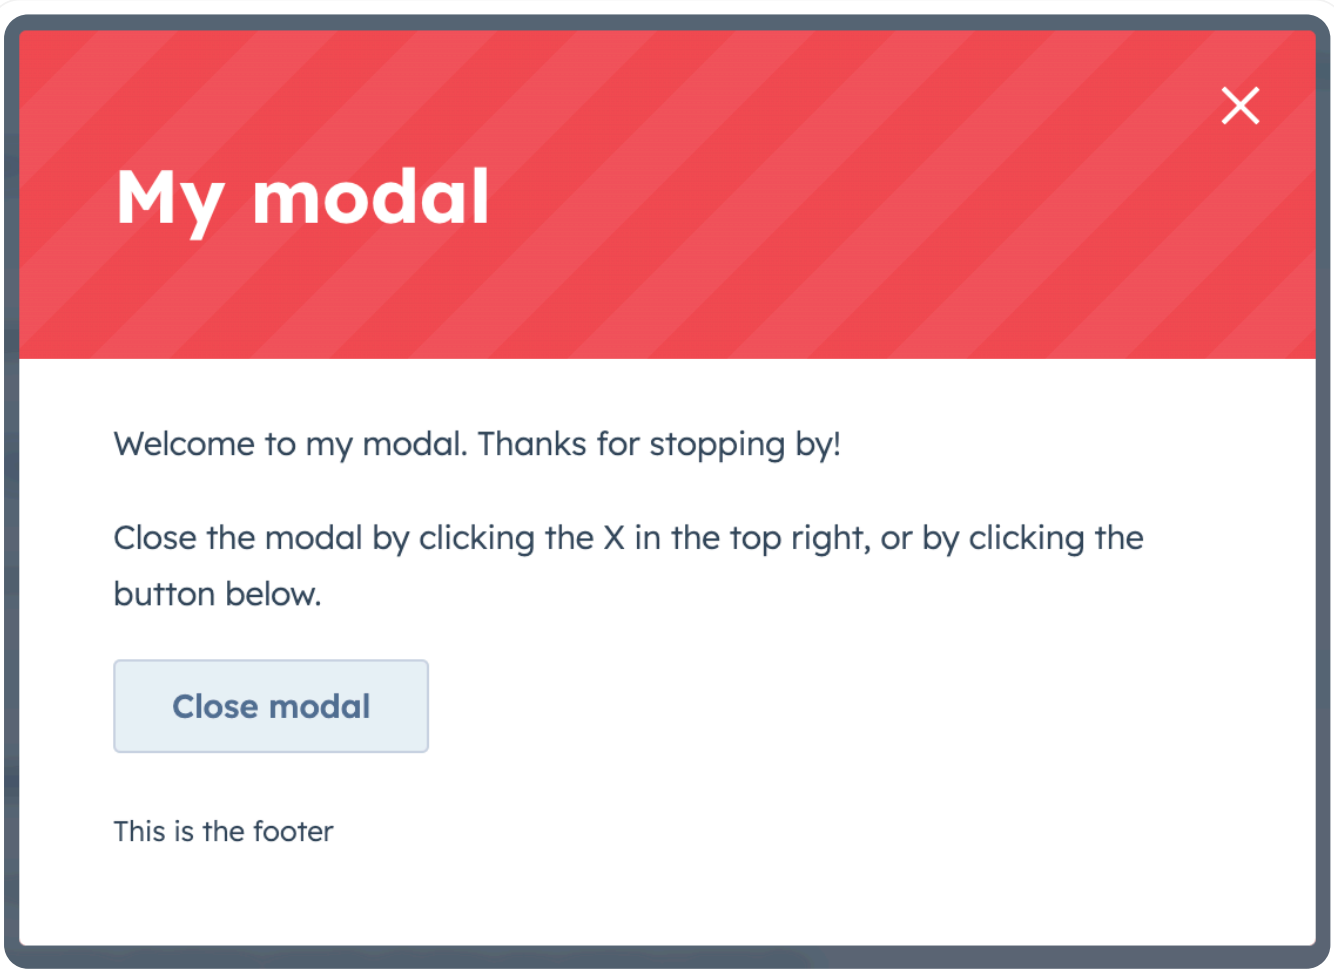

Use the danger variant to confirm when a user wants to delete a deal record.

Guidelines

DO: use this type of overlay for short messages and confirmations. If you want a more lightweight way to communicate a message to the user, check out the **Alert component**.

DO: use the danger variant to confirm destructive actions that cannot be undone. The text should clearly communicate what is being deleted, and the confirmation button should be explicit about the action. For example, never use the word “Okay” to confirm the deletion of an item. Instead, use “Delete”.

Learn more about **overlays**, including when to use a `Modal` or a `Panel`.

Related components

- **Panel**
- **Button**
- **LoadingButton**
- **Display iframe modals using the UI extensions SDK**

Last modified on January 28, 2026

Was this page helpful? Yes No

LoadingSpinner
‹ Previous

MultiSelect

HubSpot Developers

Copyright © 2026 HubSpot, Inc

Privacy Policy

Security

Website Accessibility

Manage Cookies