HubSpot Developers

Standard components › NumberInput

Standard components

NumberInput

Learn about the NumberInput component for use in UI extensions.

The `NumberInput` component renders a number input field. Commonly used within the **Form** component.

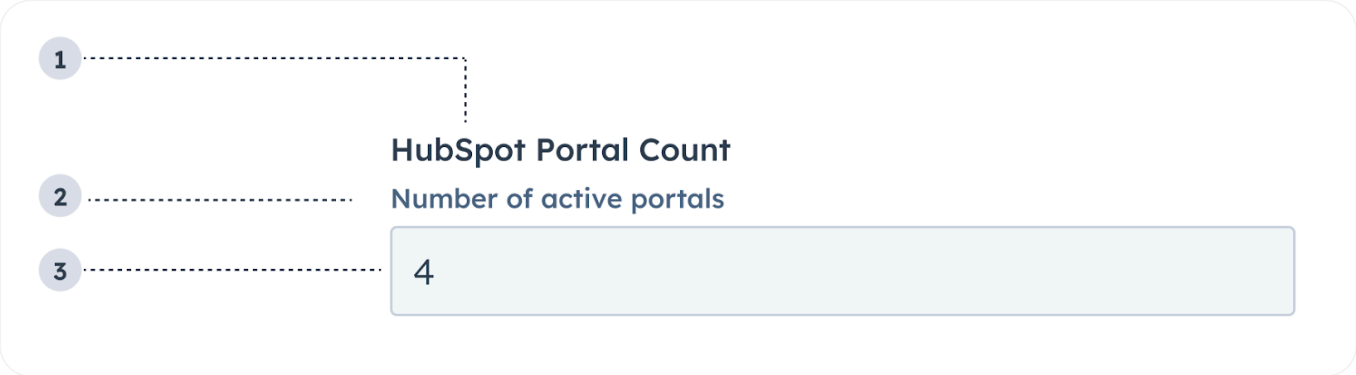

1. **Label:** the input's label.
2. **Description:** the text that describes the field's purpose.
3. **Value:** an entered value.

HubSpot Developers

```
  return (
    <NumberInput
      label={"HubSpot Portal Count"}
      name="portalsNumber"
      description={"Number of active portals"}
      placeholder={"number of portals"}
      value={portalCount}
      onChange={value => setPortalCount(value)}
    />
  );
};
```

Props

Prop	Type	Description
`defaultValue`	Number	The value of the input on initial render.
`description`	String	Text that describes the field's purpose.
`error`	Boolean	When set to `true`, `validationMessage` is displayed as an error message if provided. The input will also render its error state to let the user know there's an error. When `false` (default), `validationMessage` is displayed as a success message.
`formatStyle`	`'decimal' | 'percentage'`	Formats the input as a decimal or percentage.
`label`	String	The text that displays above the dropdown menu.
`max`	Number	Sets the upper bound of the input.
`min`	Number	Sets the lower bound of the input.
`name`	String	The input's unique identifier.
`onBlur`	`(value: number) => void`	A function that is called every time the field loses focus, passing the value.
`onChange`	`(value: number) => void`	A callback function that is invoked when the value is committed. Currently these times are `onBlur` of the input and when the user submits the form.

HubSpot Developers

›

`precision`	Number	Sets the number of digits to the right of the decimal point.
`readOnly`	Boolean	When set to `true`, users will not be able to enter a value into the field. Set to `false` by default.
`required`	Boolean	When set to `true`, displays a required field indicator.
`tooltip`	String	The text that displays in a tooltip next to the label.
`validationMessage`	String	The text to display if the input has an error.
`value`	String | number	The value of the input.

Usage example

A field in a form where salespeople can enter the total deal amount.

Guidelines

DO: make label and description text concise and clear.

DO: include placeholder text to help users understand what's expected in the field.

DO: indicate if there is a minimum or maximum number requirement.

DO: indicate if a field is required.

DO: include clear validation error messages so that users know how to fix errors.

DON'T: use this component for long responses, such as open-ended comments or feedback. Instead, use the **TextArea component**.

DON'T: use placeholder text for critical information, as it will disappear once users begin to type. Critical information should be placed in the label and descriptive text, with additional context in the tooltip if needed.

Related components

Form

DateInput

HubSpot Developers

Was this page helpful?

Yes No

MultiSelect
Previous

Panel
Next

HubSpot Developers
Copyright © 2026 HubSpot, Inc

Privacy Policy

Security

Website Accessibility

Manage Cookies