HubSpot Developers

Standard components > Panel

Standard components

Panel

Learn about the Panel component for use in UI extensions.

The `Panel` component renders a panel overlay on the right side of the page and contains other components. Like the **Modal** component, you'll include the `Panel` component in an `overlay` prop within a **Button**, **LoadingButton**, **Link**, **Tag**, or **Image** component.

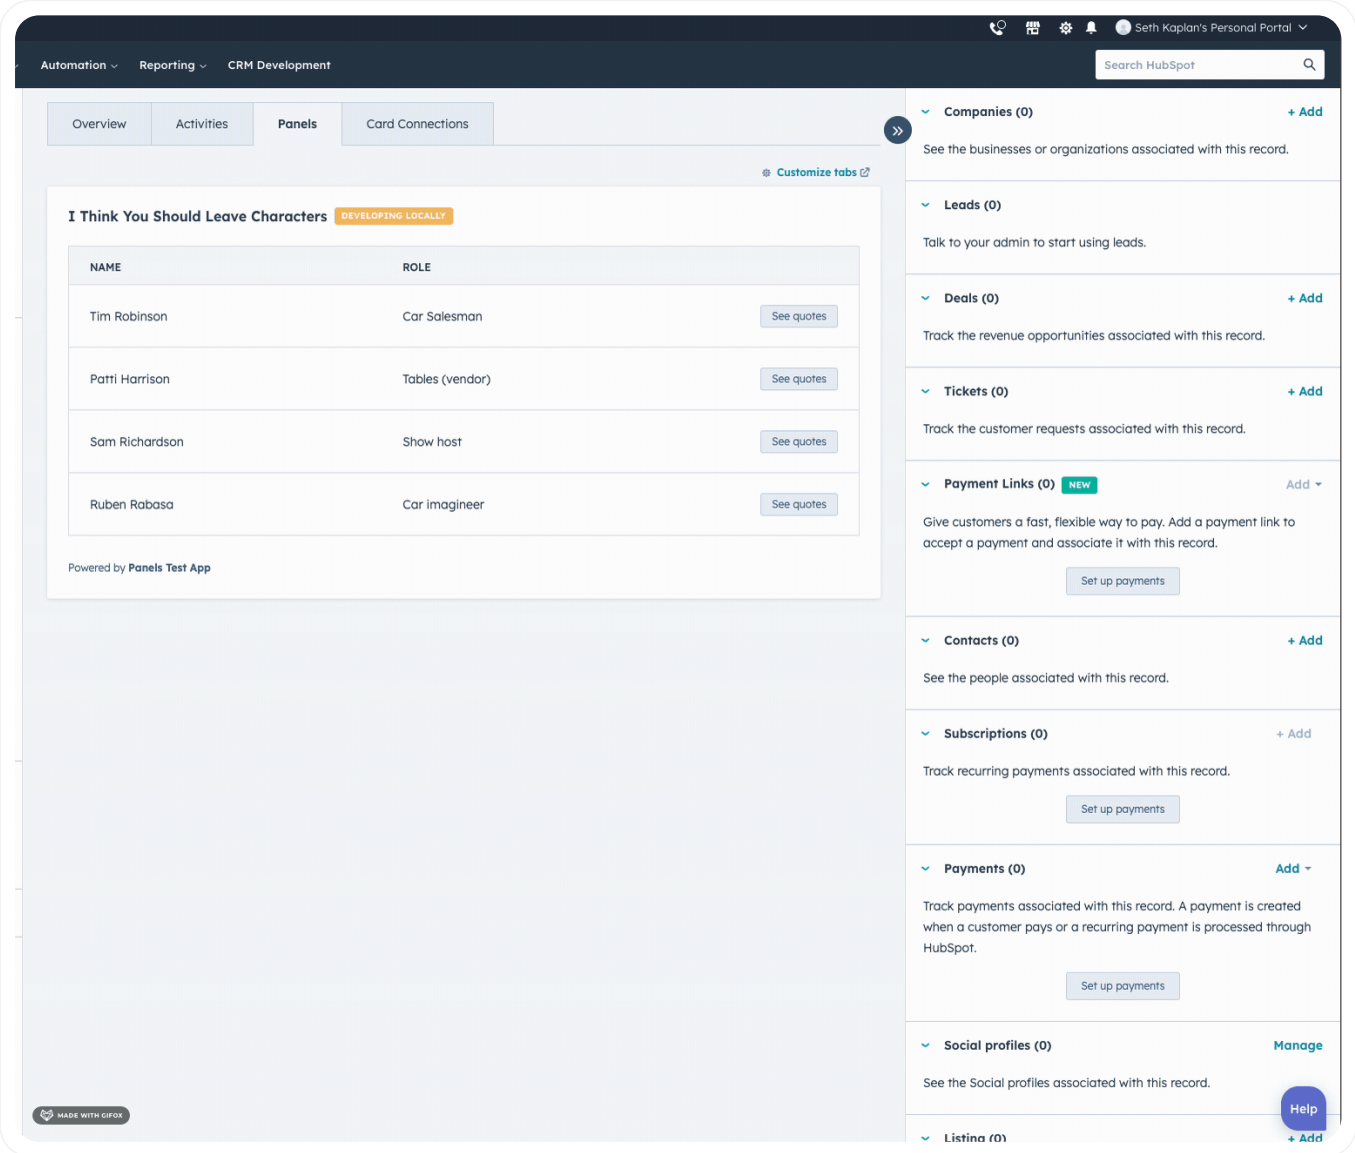

HubSpot Developers

›

a `Panel` inside another component, such as `Flex` .

- `<PanelBody>` : the container that wraps the panel's content and makes it scrollable. Include only one `PanelBody` per `Panel` .
  - `<PanelSection>` : a container that adds padding and bottom margin to provide spacing between content. You can use **Flex** and **Box** to further customize content layout.
- `<PanelFooter>` : a sticky footer component at the bottom of the panel. Include only one `PanelFooter` per `Panel` .

```
import { Button, Panel, PanelSection, PanelBody, PanelFooter

hubspot.extend(() => <OverlayExampleCard />);

const OverlayExampleCard = () => {
  return (
    <>
      <Button
        overlay={
          <Panel id="my-panel" title="Example panel">
            <PanelBody>
              <PanelSection>
                <Text>Welcome to my panel. Thanks for stopping by!</Text>
                <Text>Close the panel by clicking the X in the top right.</Text
              </PanelSection>
            </PanelBody>
            <PanelFooter></PanelFooter>
          </Panel>
        }
      >
        Open panel
      </Button>
    </>
  );
};
```

HubSpot Developers

›

Prop	Type	Description
`aria-label`	String	The panel's accessibility label.
`id`	String	A unique ID for the panel.
`onClose`	`onClose() => void`	A function that will be invoked when the panel has finished closing.
`onOpen`	`onOpen() => void`	A function that will be invoked when the panel has finished opening.
`title`	String	The text that displays at the top of the panel.
`variant`	`'modal'` | `'default'` (default)	The panel variant. The `modal` variant includes better screen reader focus on the panel and is recommended for visual and motor accessibility and tab navigation. See **variants** for more information.
`width`	`'sm'`, `'small'` (default) | `'md'`, `'medium'` | `'lg'`, `'large'`	The width of the panel.

`<PanelSection>` props

Prop	Type	Description
`flush`	Boolean	When set to `true`, the section will have no bottom margin. Default is `false`.

Opening and closing panels

By default, HubSpot handles opening the panel when the user clicks the parent **Button**, **LoadingButton**, **Link**, **Tag**, or **Image** component. A close button will also be included in the top right of the panel.

HubSpot Developers

›

Panel time!

In addition, you can add a close mechanism to a panel using a `Button` , `LoadingButton` , `Link` , `Tag` or `Image` with an `onClick` event that triggers the `closeOverlay` action. To use this action, you'll need to include the **actions argument** in `hubspot.extend()` as seen in the example code below. /apps/developer-platform/add-features/ui-extensibility/ui-extensions-sdk#registering-the-extension

Learn more about **opening and closing overlays**.

HubSpot Developers

```
const OverlayExampleCard = ({ actions }) => {
  return (
    <>
      <Button
        overlay={
          <Panel id="my-panel" title="Example panel">
            <PanelBody>
              <PanelSection>
                <Text>Welcome to my panel. Thanks for stopping by!</Text>
                <Text>Close the panel by clicking the X in the top right, or us
              </PanelSection>
            </PanelBody>
            <PanelFooter>
              <Button
                variant="secondary"
                onClick={() => {
                  actions.closeOverlay("my-panel");
                }}
              >
                Close
              </Button>
            </PanelFooter>
          </Panel>
        }
      >
        Open panel
      </Button>
    </>
  );
};
```

```
Modal .
```

Variants

By default, the panel will only obscure the content on the right side of the page where it opens. Using the `variants` prop, you can add an additional overlay behind the panel to blur the rest of the page. This variant puts more focus on the panel and improves accessibility for users with screen readers. Because the `modal` variant obscures the rest of the page's content, use it only when users don't need other context from the page.

HubSpot Developers

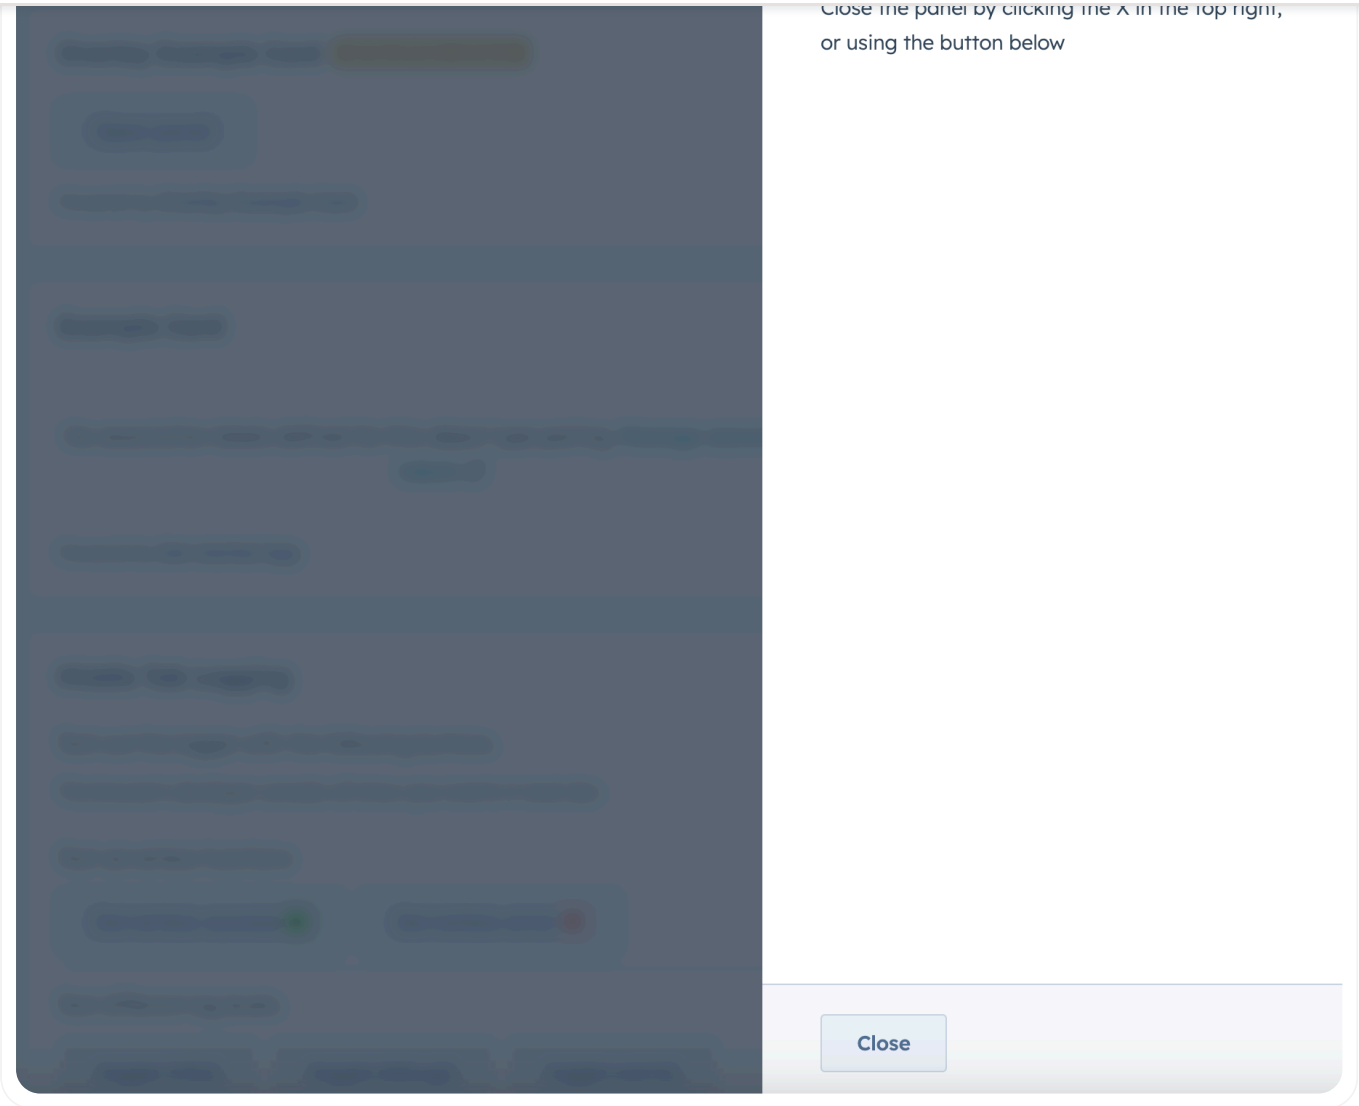

Usage examples

Use a panel when a user needs to submitting an order form for a customer.

Guidelines

Use this component when users need to fill out a longer or multi-step form.

Related components

- Box
- Button
- LoadingButton

HubSpot Developers

Modal

Tag

Tile

Last modified on January 28, 2026

Was this page helpful? Yes No

NumberInput
Previous

ProgressBar
Next

HubSpot Developers
Copyright © 2026 HubSpot, Inc
Privacy Policy
Security
Website Accessibility

Manage Cookies