Standard components

RadioButton

Learn about the RadioButton component for use in UI extensions.

The `RadioButton` component renders a radio select button. If you want to include more than two radio buttons, or are building a form, it's recommended to use the **ToggleGroup** component instead.

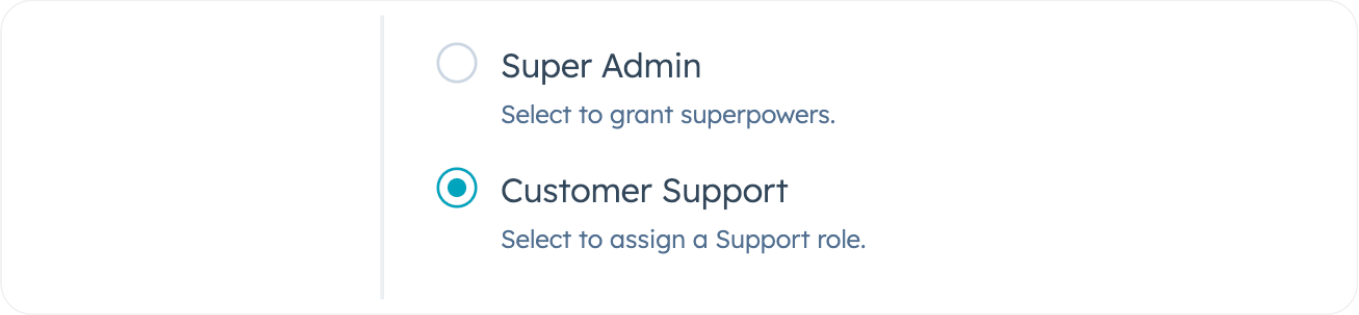

HubSpot Developers

```
  return (
    <>
      <RadioButton
        checked={roleType === "superAdmin"}
        name="roleType"
        description="Select to grant superpowers."
        onChange={() => {
          setRoleType("superAdmin");
        }}
      >
        Super Admin
      </RadioButton>
      <RadioButton
        checked={roleType === "support"}
        name="roleType"
        description="Select to assign a Support role."
        onChange={() => {
          setRoleType("support");
        }}
      >
        Customer Support
      </RadioButton>
    </>
  );
}
```

Props

Prop	Type	Description
`checked`	Boolean	Whether the radio button is currently selected. Default is `false` .
`description`	String	Text that describes the field's purpose.
`initialIsChecked`	Boolean	When set to `true` , the option will be selected by default. Default is `false` .

HubSpot Developers

›

`onChange`	`(checked: boolean, value: string) => void`	A callback function that is invoked when the radio button is selected. Passes the new value.
`readonly`	Boolean	When set to `true`, users will not be able to enter a value into the field. Set to `false` by default.
`value`	String | number	The radio button value. This value is not displayed, but is passed on the server side when submitted, along with `name`.
`variant`	`'sm'`, `'small'` | `'default'` (default)	The size of the checkbox.

Related components

- Checkbox
- ToggleGroup
- TextArea

Last modified on January 28, 2026

Was this page helpful? Yes No

ProgressBar
‹ Previous

ScoreCircle
Next ›